Examined by G. H. Cosmett 11/66

BOOK A-153

Field Notes
of the Survey of the
South and East
and Re-survey of West
Boundaries
of
Township 41 South
Range 13 West
of the
Salt Lake Meridian
Utah Territory
by
J. Ls. Burrill
under print contract of
Bailey & Burrill
No 73
dated Sept. 4th 1876.

Surveyed March 17th 1877

BOOK-A-153

FOR CHAINMEN.

We Hiram Barney
and L. S. Pettit
do solemnly swear that we will faith
fully execute the duties of chain carrier
that we will level the chain upon uneve
ground, and plumb the tally pin
whether by sticking or dropping t
same; that we will report the true di
tance to all notable objects, and the tr
length of all lines that we assist in mea
uring, to the best of our skill and abilit

Witness
John A. Mitchell.

Hiram his Barney
L. S. Pettit mark

Subscribed and sworn to before m
this 17" day of March , 187

T. C. Bailey
U. S. Dept. Surv.

BOOK-A-153

FOR FLAGMAN.

I, Adolph Jessen

do solemnly swear that I will well and truly perform the duties of flagman, according to instructions given me, and to the best of my skill and ability.

Adolph Jessen

Subscribed and sworn to before me this 17th day of March, 187

T. C. Bailey
U. S. Dep. Surveyor.

BOOK-A-153

FOR AXEMAN.

I, Adolph Jessen

do solemnly swear that I will well and truly perform the duties of axeman, according to instructions given me, and to the best of my skill and ability.

Adolph Jessen.

Subscribed and sworn to before me this 7th day of March, 187?

W. C. Bailey
U. S. Dep. Surveyor.

BOOK-A-153

FOR CHAINMEN.

We William R. Heath
and James H. Heath
do solemnly swear that we will faithfully execute the duties of chain carriers; that we will level the chain upon uneven ground, and plumb the tally pins, whether by sticking or dropping the same; that we will report the true distance to all notable objects, and the true length of all lines that we assist in measuring, to the best of our skill and ability.

W. R. Heath
J. H. Heath

Subscribed and sworn to before me this 17th day of March, 1871

T. C. Bailey
U. S. Dep. Surveyor

BOOK-A-153

FOR FLAGMAN.

I, John A. Mitchell

do solemnly swear that I will well and truly perform the duties of flagman, according to instructions given me, and to the best of my skill and ability.

John A. Mitchell C.

Subscribed and sworn to before me this 17th day of March, 187

E. C. Bailey
U. S. Dep. Surveyor

BOOK-A-153

FOR AXEMAN.

I, John A. Mitchell

do solemnly swear that I will well an

truly perform the duties of axeman, a

cording to instructions given me, and

the best of my skill and ability.

John A. Mitche

Subscribed and sworn to before m

this 17th day of March , 187

T. C. Bailey .

U. S. Dep. Surveyor.

South
BOOK-A-153

South Boundary of T. 41 S. R. 13 W.
BOOK-A-153 Salt Lake Meridian —

Mains Survey commenced March
17th 1877 by J. L. Burrill
Note The cor. to Townships
41 & 42 South Ranges 12 &
13 W. not being set thereon
from the cor. to townships
41 & 42 South Ranges 13
& 14 W. said cor. being
established by Joseph Goribin-
ski under his contract No
dated 1870 consisting
of: a black volcanic rock

with mound of stone — and
having been properly identified
by me I run

East on true line
between secs 6 & 31
Var. 16° E.

South Boundary of T. 41 S.

Chains
40.00 Set trachyte 11 x 10 x 5 in, 7 [illegible]
deep marked ¼ on N. side with
mound of stone for ¼ sec cor.
44.25 Wash at foot of bench land
80.00 Set trachyte 14 x 10 x 6 in g[illegible]
deep notched 5 E & 1 W.
mound of stone for cor to
secs 5, 6 31 & 32
Land undulating.
Soil 2nd rate
No timber

East on true line
between secs 5 & 32
Var. 16° E.

34.00 Top of ridge ascend
40.00 Set trachyte 18 x 16 x 8 in
in deep marked ¼ on S.
side with mound of st
for ¼ sec. cor. —

Chains
60.00 [illegible]
82.00 [illegible]
7.00 [illegible]
40.00 [illegible]

R. 13 W. — Salt Lake Meridian

BOOK A 153

Ridge bears N. 25 chains
& S.

Marked Stationary Trachyte
10 x 6 x 6 feet above ground
4 notches on E. & 2 on W.
edges, with mound of stone
on top for cor to secs
4. 5. 32 & 33

Land undulating
Soil 2nd rate
No timber

East on true line
between secs 4 & 33
Var. 16° E.

Trachyte gulch bears N.
leave ridge —

Set trachyte 15 x 10 x 8 in 10
in deep marked ¼ on N. side

South Boundary of T. 41 S. R. 13 W.

Chains

and raised mound of stone
for 1/4 sec. cor.

80.00 Set limestone 13 x 10 x 5
8 in dia notched 3 E & W
with mound of stone for
cor to secs 3, 4 33 & 34
Land nearly level
Soil 1st rate
No Timber

East on true line
between secs 3 & 34
Var. 16° E.

25.00

40.00 Set trachyte 12 x 10 x 6 in 8 in
dia marked 1/4 on N. side, with
mound of stone for 1/4 sec. cor. 35.00 40.00

46.00 Track from Workmans Spring
Trees N. W.

69.00 Trail bears N. & S.

R. 13 W. Salt Lake Meridian

B30R-A-153

Chains

87.00 Set trachyte 12 x 7 x 4 in 8 in deep notched 2 E & 4 N., with mound of earth mixed from 4 pits each 24 x 12 x 12 in. for cor to secs 2, 3, 34 & 35
Land level
Soil 1st rate
No timber.

East on true line between secs 2 & 35
Var. 16° E.

25.00 Foot of trachyte bluffs near N & S

35.00 Top of same

40.00 Set limestone 20 x 10 x 8 in 15 in deep marked 1/4 Cor N. side with mound of stone for 1/4 sec. cor.

6 South Boundary of T. 41 S. R. 13

Chains	
45.00	Ridge bears N & S
57.40	Junction of three gullies drains N.
63.50	Ridge bears N & S.E.
69.25	Road on side of hill bears N & S.
70.50	Gulch drains N.
75.00	Enters level ground
80.00	Set limestone 17 x 12 x 5 in. 12 in deep notched 1E & 5N with mound of stone for cor. to secs 1, 2, 35 & 36.

Land mostly undulating -
Soil 2nd rate
No timber

East on true line between secs 1 & 36
Var. 16° E.

Chains	
3.50	
23.50	
48.00	
63.50	
80.00	

R. 13 W. Salt Lake Meridian

BOOK-A-153

Chains	
3.50	Rocky wash drains N.W.
23.50	Ravine drains N.W.
40.00	Set limestone 14 x 10 x 7 in 9 in. deep marked ¼ on N side and raised mound of stone for ¼ sec. cor.
63.50	Rock wash drains N.W.
80.00	Set limestone 16 x 8 x 5 in 10 in deep marked 6 notches on N. S. E & W. edges and raised a monument of stone for cor. to Tps. 41 & 42 South, Rs 12 & 13 W.

Land undulating
Soil 2nd rate
No timber

East Boundary of T 41 S. R 13 E
Chains

From the cor to T. 41
42 S. R. 12 & 13 W. ut by
me on this survey
I run
North between secs 31 & 36
Var 16° E.

22.50 Rock wash drains N.W.
40.00 Set limestone 12 x 9 x 5 in
8 in. deep marked 1/4 on
W. side and pained mound
of stone for 1/4 sec. cor.
50.00 Enter bricks formed by
gulches tributary to the
Rio Virgin.
80.00 Poles in brush not set
thereon at 30 lks set
limestone 16 x 10 x 6 in mark
1 notch on N., 5 on S. sides
N.C., with mound of stone

R 13 W. Salt Lake Meridian

BOOK A-153

Chains for witness cor to secs
25, 30, 31 & 36.
Land broken
Soil 3rd rate
No timber

North between secs 26 & 30
Var 16° E.

Note: As it is impossible to chain the line in place I caused a pegg to be set in line on the N. brink of the Rio Virgin bracks, then from the witness cor. 30 chs S. of cor. point to secs 30, 25 31 & 36 I measured a base E. 40 chs from which said pegg bears N. 15° 13' W. also a base 80 chs E. from which pegg in line

East boundary of T. 41 S. R. 16

Chains		Chains
	bears N. 28° 33' W., first	37.04
	triangle gives distance	40.00
	to be 147.05 chains, second	
	gives distance 147.03 chs	
	mean distance 147.04	60.00
	chs to a point 37.04 chs	80.00
	North of	
80.00	The cor. to secs 19. 24. 25	
	& 30 when 2 set trachyte	
	16 x 10 x 9 in 10 in. deep mark	
	4 notches on N & W sides	
	W. C., with mound of stone	
	for witness cor to secs	
	19. 24. 25 & 30 - The Rio Virgen	
100 links wide	runs W. about 25 chs S. of the true cor. point	
	Land all broken	
	Soil 3rd rate	5.00
	No timber	8.50
		40.00

North between secs 19 & 24
Var. 16° E.

R. 13 W. Salt Lake Meridian

BOOK-A-153

Chains	
37.04	The Witness cor.
40.00	Set limestone 18 x 14 x 3in 13in deep marked 1/4 on W. side, with mound of stone for 1/4 sec cor.
60.00	Gulch drains W.
80.00	Set limestone 20 x 7 x 4in 15 in. deep notched 3 N. & S., with mound of stone for cor to secs 13, 18, 19 & 24
	Land mostly undulating
	Soil 2nd rate
	No timber.

North between secs 13 & 18
Var 16° E.

5.00	Telegraph line bears E & W
8.50	Road " " "
40.00	Set sandstone 16 x 12 x 3in 10in deep marked 1/4 on W. side with mound of stone for 1/4 sec cor.

East Boundary of T. 41 S. R 13 E. Salt Lake 1st

Chains		Links
44.50	Road to Tooele ville & Provo City bears S & W.	
46.00	Wash in gulch drains S.W.	
71.45	Deep inaccessible (drains westerly) ravine gulch	
80.00	Falls in gulch not set thereon at 71.45 Chains set limestone 22 x 14 x 4 in 15 in deep note N & S. W. C., with mound of stone for witness cor to secs 12, 13, 7 & 18	
	Land undulating	
	Soil 2nd rate	
	No timber	
	Note: On account of heavy rains & abandon line here.	

Resurvey of Meridian

BOOK

to

3.00

70.00

40.00

Resurvey of Mile W. boundary of T. 41 S R 13 W
Meridian —
BOOK-A-153
Remarks

From the established cor.
to secs 1, 6, 7 & 12 I run
North on a resurvey line
(having previously retraced the
line & found the 1/4 sec. cor. gone)
between secs 1 & 6
Var. 16.00 E.

Ascend
5.00 Top of bluffs bear E & W.
20.00 Bonanza City is just East
in S. W. 1/4 of secs 6 T. 41 S. R
13 W.
40.00 Set Granite boulder 15 x 10 x 9 ins
10 in. deep marked 1/4 on W.
side, with mound of stone
for reestablished 1/4 sec. cor
from which an old cedar
stump 4 in. dia bears S. 45 W.
42 lks. dist. on which are the old

Resurvey of 1 Mile W. Boundary T41S R3W

14

1/4 cor bearing two marks agreeing with the original notes — No trees of the other bearing trees to be found. This cor. is 8 lks N. of the S. side of a stone bears S. 87° 50' W. and 35 lks E. of the W. side of Main Stone bearing N. 7° 10' W. in the Town of Silver Reef

47.75 S. side of stone bears S. 87° 50' W.

55.50 " " " "

The stones N. of this not being deep and unable to note them.

60.00 Brook runs S.E.

77.00 Wash drains S.E.

80.00 The cor to T40 & 41 S R 13 & 14 W. agreeing with original notes Land rolling Soil and rocky No timber —

March 17th 1879 J. G. Burrell

Salt
BOOK A

Salt Lake Meridian 15

BOOK-A-153

For general Description & approval see end of Subdivision notes of this township —

BOOK-A-153

17

Examined by C. H. Cramwell. & C.

Field Notes,

of,

the Additional Survey of the

Subdivision Lines

of

Tp. 4 N., Range 13 W.,

of the

Salt Lake Meridian,

Utah Territory,

By,

Bailey & Burrill

Under Joint Contract of Bailey & Burrill

No. 73 dated Sept. 4th 1876.

Survey Commenced Nov. 19th 1877

Survey Completed " " "

OK-A-153

Subdivisions T. 41 S., R. 13 W., 19
Salt Lake Meridian

90K-A-153
Notes, Survey commenced March 19th
1879 By J. G. Burrill
Note, As the S. portion of this
Tp. is not Surveyed, therefore
from the Witness Cor. to Secs.
24 & 25, on the E. boundary
I run,
West on true line
Return Secs. 24 & 25,
Var. 16° E.
Note, Line in place impracticable, therefore from the
Witness Corner to Secs. 24
& 25, 37.04 chs. N. of true
Cor. point I offset W. 35 chs.
thence S. 37.04 chs. to
35.11 An line in place on right
bank of Rio Virgen brake,
where I set tracheyte 20
x 10 x 6 in. 15 in. deep, marked

70

Subdivisions, 2 N. 41 E. R. 13 W.

Chains

Chains, 1/4 N.C. on N side, with mound of stones for Witness, 1/4 Sec. Cor.

80,00 Set hackberry 14 x 8 x 4 in. 9 in. deep, notched 1 E. & 2 on S. edges, with mound of stones for Cor. to Secs. 23. 24 25, & 26,

Land undulating.
Soil 2nd rate,
No Timber.

North between Secs. 23 & 24 40,00

Var. 16° E. 81,18

4,11,10 Set hackberry 13 x 10 x 4 in. 8 in. deep, marked 1/4 on N. side, with mound of stones for 1/4 Sec. Cor.

73.50 Ended chains N.W. 40,04

Salt Lake Meridian.

Chains,
80,00 Set Sandstone 16 x 11 x 5 in,
10 in. deep, notched 1 on E,
& 3 on S, edges, with mound
of stones for Cor, to Secs,
13, 14, 23 & 24,
Land rolling,
Soil 2nd rate,
No timber,

X

Each on random line,
between Secs. 13 & 24,
Var. 16° E.

40,00 Set temporary 1/4 Sec, Cor,
80,00 Intersect E. boundary of
Township at Cor. to Secs,
13 & 14, from which,
Witness tree line
Ottawin Secs. 13 & 24,
40,04 Set trachyte 12 x 8 x 6 in,

22

Subdivisions. 2 N. 4 E. S. R. 13 W.

Chains	Stn deep, marked 1/4 on N. side with mound of stones for 1/4 Sec. Cor.	Chains.	12,50
80,08	The Cor. to Secs. 13, 14, 23 & 24		80,00
	Land rolling, Soil 2nd rate, Timber		
	North between Secs. 13 & 14 Var. 16° E.		
15,50	Wash drains W. Wagon trail bears E. & W. a field		
	10 chs. W. bears S. & W.		
34,50	Various ravine drains N. W. A field 7,50 chs.		13,00
	bears N. W. 15 chs. & S. 12		15,00
	Chs. along the Virden Creek		
44,00	Set trachyte 25 x 16 x 14 in.		20,00
	15 in. deep, marked 1/4		

		N. side, with mound of stones for 1/4 Sec. Cor.
	12,50	Enter rolling bench,
23 & 24	11,00	The Cor to Secs. 11, 12, 13 & 14, established by Joseph Gorlinski, in. 1870.
		Land rolling.
		Soil 2nd rate.
		No Timber.

		East on random line between Secs. 12 & 13.
		Var. 16° E.
		Ascend,
his.	13,00	Ridge bears N. & S. descend,
S. 12	15,00	Road in hollow bend. bears 250 lks. North.
	20,00	Road in "Nephis Fork" bears N.W. & S.E.

Subdivisions, T. 41 S., R. 13 W.

Chains.		Chains.
24,00	Wash drains S.W. Porphyritic mineral hill 250 lks. N.	80,00
33,00	Road in trist N.E. & S.W.	
34,00	" " " N.W. & S.E.	
40,00	Set temporary 1/4 Sec. Cor. Offset S. 8,55 chs. thence E. 40 chs to.	
80,00	Intersect E. boundary of T., at N.C. 8,55 chs. S. of Cor. joint to Secs. 12 & 13, from which. Western Tree line bears N.	
40,00	S. side of road in Trist bears N.E. & S.W. Set Limestone 22x7x6 in. 15 in. deep, marked 1/4 on N. side with mound of stones for 1/4 Sec. Cor.	40,00

BOOK-A-153

Jack Lake Meridian,

Chains.

11,00 The Cor. to Secs. 11, 12, 13 & 14,
Land heavy rolling,
Soil 2nd rate,
No timber

North between Secs. 11 & 12,
Var. 16° E.
Note: From the 1/4 Sec. cor. established by Joseph Gorlinski in 1870, found a white sandrock in place, 2 x 2 ft, Line in place impracticable I offset N. 35 chs, thence N. 40 chs, to a pine 35 chs. N. of

40,00 Where I mark Standing Tracbyle 36. x 30 x 25, ins, above ground, marked 1 notch on E. & 5 on S,

26

Subdivisions, T. 41 S. R. 13 E.

Chains, Edges, & N.C. with mound of stone for Witness Cor. to Sees. 1, 2, 11 & 12,

Land rocky.

Soil 2nd rate,

No timber

Chains,

35,00

40,00

East on random line between Sees. 2 & 11,

Var. 16° E.

Note; The 1/4 Sec. Cor. being established by Joseph Gorlinski in 1870, Viz: A Blue Limestone 27 x 15 x 12 ins. therefrom. Ironn East from said 1/4 Sec. Cor.

40,00 The Cor. from to Sees. 1, 2, 11 & 12 not being established therefrom at 5,00 chs. I intersect N. & S. line at Witness Corner, 35, chs.

BOOK-A-153

Salt Lake Meridian,

Chains, N. of cor. point, to Secs. 1, 2, 11 & 12,
from which,
N. on true line
between Secs. 2 & 11,
35,00 The said Witness Cor.,
40,00 The 1/4 Sec. Cor. as established
in previous Survey,
Land Mountainous,
Soil 3rd rate,
No Timber,

North on true line,
between Secs. 1 & 2,
Var. 16° E.
Note; Line in place
impracticable, therefore
from the Witness Cor. 35 chs.
N. of true Cor. point, to Secs.
1, 2, 11, & 12, Town. North

BOOK-A

Subdivisions. Tp. 41 S. R. 13 W.

Chains		Chains.
80,00	On Offset Cor. 80 chs. to, Intersect 8th Standard Parallel South at. Witness Cor, 35 chs. N. of Standard Cor; point, to Secs, 35, & 36, Tp, 40 S. R. 13 W. which is therefore the closing Cor.	40,00
	point to Secs, 1 & 2,	53.48.
	Land mountainous, Soil 2nd rate,	79,40
	Timber,	80,00

March 19th 1877 J. G. Burrill

" 19th " by T. C. Bailey

Note; The Cor. to Secs, 22, 23, 26, & 27, not ech therefore from the Cor. to Secs, 23, 24, 25 & 26, I run,

West on true line between Secs, 23 & 26,

Var. 16° E,

BOOK-A-153

Salt Lake Meridian 29

Chains.	
40,00	Set trachyte 20x15x8 in, 15 ins. deep, marked 1/4 on N. side, with mound of stones for 1/4 Sec. Cor,
53,48,	South side of planed land, Rio Virgin 2 1/2 lks wide, runs N. W.
79,40	Left bank of Rio Virgin runs S.
80,00	Falls in river not set, therefore at 79,40 Set trachyte 20x14x10 in, 15 in, deep, marked 2 notches on E. & S. edges, & W. C. for Witness Cor. to Secs, 22. 23. 26, & 27,

Land rolling,
2nd rate,
No Timber,

Subdivisions, Tp. 41 S. R. 13 W.

Chains, North between Secs, 22. & 23,
Var. 16° E.

Note, Line in place impracticable
on account of broken bluffs,
therefore I offset E. 15 chs,
thence N. 27.50 chs, thence E.
5 chs, thence N. 12,50 chs, at
this point, M Willis' house
bears N. 41°30' W. 6,50 chs,
distant, G. Spillsburys
house bears S. 45°30' E.
12 chs, dist, thence E. 29 chs
at 4,75 chs, on last course
J. Ransoms house 3,50 chs
N.; at 15,50 chs, fence bears 111,10
N.& S. thence N. 40. chs, 15,00
thence N. 40 chs. to
80,00 On point of confluence of 20,50
two small Creeches, main
one heading W, the other N.W. 22,50

Salt Lake Meridian

Set State stone 18x8x8 in, 12 in. deep, marked 2 notches on E. & 3 on S. edges with mound of stones for Cor. to Secs. 14, 15, 22 & 23,

Lands on line in place broken, In bottom land. Soil 1st rate,

No timber.

East on random line between Secs. 14 & 23, Var. 16° E.

11,00	Enter bottom of Ash creek,
15,00	Ash creek 15 lks. wide 10 in. deep, runs S. W.
20,50	Ash creek branch 10 lks. wide runs S. W.
22,50	Leave bottom, Ascend.

92

Subdivisions. Tp. 41 S. R. 13 W.

Chains	
50,00	Ridge bears N. & S.
39.70	Enter Le Verkin bottom,
40,00	Set temporary 1/4 Sec. Cor.
40,70	Road bears N. & S,
50,00	" " " "
56,00	Le Verkin Creek 30 lks wide runs S.W. enter cultivated land
59.25	Leave Cultivated land, Ascend,
61,50	Top of trachyte ledge 50 feet high bears N.E. & S.W.
62,50	Ridge point bears N. 12 chs. & S.
75.00	Gulch drains N.W.
80,00	Intersect N. & S. line at Cor. to Secs. 13. 14. 23 & 24, from which, West on true line between Secs. 14 & 23,

Chains,	
40,00	Le
	de
	ce
	1/4
80,00	Th
	Th
	Gr
	Ca
40,00	

Dup

BOOK-A-253

Duck Lake Meridian

Chains.	
40,00	Set Hachyte 17x11x6 in, 11 in, deep, marked 1/4 on N. side, with mound of stones for 1/4 Sec. Cor.
80,00	The Cor. to Secs. 14, 15, 22, & 23, Land Broken, Soil 2nd rate, No Timber.

North Between Secs. 14 & 15, Var. 16° E.

40,00	The Cor. established by Joseph Golinski in 18", 2½" Red Sandstone in place 6x6 ft" Land Broken, Soil 2nd rate, No Timber: pmarks Cor. Dupaix Quartz Mill bears N. 78 E. 27 lks.

Subdivisions. T. 45 S. R. 16. W.

Chains,	Note:	Chains,
	The Cor. to Secs. 15, 16, 21, & 22,	
	must set therefore from the	
	Cor. to Secs. 14, 15, 22 & 23, Dran.	
	West on true line	
	between Secs. 15 & 22,	
	Var. 16° E,	40,00
2,00	Gulch drains S. 80 E,	
24,75	Deep rock Gulch drains S.E,	
40,00	Set sandstone 16x11x6 in,	42,50
	11 in. deep, marked 1/4 on	80,00
	N. side with mound of	
	stones for 1/4 Sec. Cor,	
63,00	Quarry road, Bears N. & S.	
80,00	Set Sandstone 16x16x12 in	
	10 in. deep, notched 3 on E. & S.	
	edges, with mound of	
	stones for Cor. to Secs, 15, 16,	
	21 & 22,	
	Land Broken,	
	Soil 2nd rate,	

BOOK-A-153

Salt Lake Meridian

Chains, No Timber,

North Between Sees, 15 & 16,
Var. 16° E,

41,10 Set Sandstone 16×12×4 in,
10 in, deep, marked 1/4 on N, side
with mound of stones for 1/4 Sec. Cor,

42,50 Road bears N.E. & S.W.,

81,11 Set Sandstone 14×11×4 in, 9 in,
deep, notched 3 on E, & 4 on S,
edges, & raised mound of earth
from 4 pits, each 24×12×12 in,
for Cor to Sees, 9.10.15 & 16,
Land mostly level,
Soil 1st rate,
No Timber,

Subdivision of Sec. 41 T. R. 13 W.

Chains,		Chains,
	Course random line between Secs. 10 & 15, Var. 16° E.	14,50
17.25,	To point of low black oak bears N. 20. lks,	40,00
40,00	Set temporary 1/4 Sec. Cor.,	
79.80,	Intersect N. & S. line, 18 lks, N. of Cor. to Secs. 10, 11, 14 & 15, from which,	
	N. 89° 52' W. on true line between Secs. 10 & 15,	42,50
		74,00
		74,50
39.90	Drive charred cedar stake 4 8x4x4 in, marked 1/4 S on N. side, 12 in. deep, & raised mound of earth from 4 pits each 24x12x12 in, for 1/4 Sec. Cor.	41,00
79,80	The Cor. to Secs. 9, 10, 15 & 16, Land nearly level, Soil 2nd rate, Timber a few cedars,	

Salt Lake Meridian.

Chains,	
	North between Secs. 9 & 10,
	Var. 16° E,
14,50	Road bears E. & N.
40,00	Set sandstone 14 x 8 x 5 ins, 9 ins. deep, marked 1/4 on W. side, & raised mound of earth
	1mm 4 pits, each 24 x 12 x 12 ins,
	for 1/4 Sec. Cor.
42,50	Road bears E. & N.
74,00	" " " " } Joins
94,50	" " N.W. & S.E. }
80,00	Set Sandstone 16 x 12 x 6 ins, 10 ins. deep, notched 3 on E. & 5 on S. edges, with mound of stone for Cor. to Secs. 3. 4. 9 & 10,
	Land nearly level.
	Soil 1st rate,
	No Timber,

Subdivisions. Tp. 41 S. R. 13 W.

Chains,	Each on random line,	Chains	T
	Returns Secs. 3 & 10,		st
	Var. 16° E,	56.50	2e
40,00	The 1/4 Sec. Cor. established	40,00	Fo
	by Joseph Gorlinski in 1870,		&
	Viz: "A Granite 14x10x4 in."	79.80	S
	from which,		S.
	Station true line,		33
	between Secs. 3 & 10,		wi
40,00	The Cor. to Secs. 3.4.9 & 10,		ch
	Land nearly level,		
	Soil 2nd rate,		
	No timber,		
			Ju
	North on true line		A
	between Secs. 3 & 4,		
	Var. 16° E,		th
40,00	Set Sandstone 14x8x5 in,		
	9 in. deep, marked 1/4 on		

Salt Lake Meridian

2 chains	N. side, with mound of stones, for 1/4 Sec. Cor.
56.00	Telegraph line, bears E. & W.
40.00	Forks of road bears N. of E. & N. of W. & S. of W.
79.80	Intersect 8th Standard Parallel South, at Standard Cor. to Secs. 33 & 34 N. 40 S. R. 13 W. which is therefore also the closing Cor. to Secs. 3 & 4.

Land rolling,
Soil 2nd rate,
Timber, Scattering Cedars,

As the Cor. to Secs. 4. 5. 8 & 9 is not set therefore from the Cor. to Secs. 3. 4. 9 & 10, I run, West on true line between Secs. 4 & 9.

Subdivisions, T. 4 S. R. 13 W.

Chains.	Var, 16° E.
	Descend,
13,50	Gulch drains S,
20,00	S, point of Red Sandstone
	ledge,
38,00	Dry Gulch, drains S, descend
40,00	Set sandstone 14 x 8 x 6 in,
	9 in, deep, marked 1/4 on
	N. side, with mound of
	stone for 1/4 Sec. Cor,
69,50	Sandstone ridge, bears N. S, descend
80,00	Set Sandstone 20 x 12 x 4 in, 15
	in, deep, notch 4 on E, & 5 on
	S, edges, with mound of
	stones for Cor, to Secs, 4. 5. 8. & 9.
	Land broken & rocky,
	Soil 2nd rate,
	No Timber,

Chains,	Ari
	A
	Al
10,00	Set
	in, d
	side
	for
13,00	Roa
	N. E
79.90	Int
	Par
	Cor,
	whe
	Cor,
	L
	I
	In

BOOK-A-1

BOOK-A-15

chains,	North on true line
	between Secs. 4 & 5,
	Var. 16° E,
	Along St. close of ridge,
10,00	Set Sandstone. 14×10×6 in, 9
	in. deep, marked ¼ on W.
	side, with mound of stones
	for ¼ Sec. Cor,
63,00	Road at foot of ridge bears
	N.E. & S.W.
79.90	Intersect 8th Standard
	Parallel South, at Standard
	Cor, to Secs, 32 & 33, T. 4 S. R. 13 W,
	which is therefore the closing
	Cor. to Secs. 4 & 5,
	Land mostly broken,
	Soil 2nd rate,
	Timber, Aspen cedars,

BOOK A

Subdivisions. Tp. 41 S. R. 13 W.

Chains	
	At the Cor. to Secs. 5, 6, 7, & 8 was established by Joseph Gorlinski in 1870. I run,
	West on meander line between Secs. 5 & 8, Var. 16° E.
11.10	House & ranch at Grape Vine Springs, bears N. 37½
40.00	Same bears N. 9° 15' E.
	Set temporary ¼ Sec. Cor.
47.50	Road bears N. & S.
49.00	Gulch drains S. Ascend Mineral hill,
80.30	On top of hill bears N. W. & S. E. Intersect N. & S. line at Cor. to Secs. 5, 6, 7 & 8, from which,
	Each on true line, between Secs. 5 & 8,
49.15	Set Quartzite 18 x 8 x 6 in.

Chains

Chains	
	12
	N.
	stm
80.30	the
	La
	Note
	of
	Mar
	C
	The
	W. Cor
	& ash
	under
	Return
	The
	land

Salt Lake Meridian.

12 ins. 12 in. diam., marked 1/4 on N. side, & raised mound of stones for 1/4 Sec. Cor.

0,30 The Cor. to Secs. 4, 5, 8 & 9,

Land mostly level,

Soil 2nd rate,

No Timber.

Note: I abandon further Survey of this Township,

March 19th 1877.

T. C. Bailey

General Description,

The additional land Surveyed in this Tp. Comprises the bottoms on Le. Verkin & Ash Creeks, & the Rio Virgen, mostly under cultivation & adjacent Benches, which, I return as agricultural.

The following I return as Mineral land Viz; E 1/2 of Sec. 15, N.E. 1/4

of Sec. 22, N 1/2 & S.E. 1/4 of N.W 1/4
& E. 1/2 of S.W. 1/4 of Sec. 8,
& S. 1/2 of S.W. 1/4 Sec. 5,

T. C. Dailey
U.S. Dpty Surveyor.

BOOK-

U. S. S

Salt L

The for

E & W

Townshi

Executed

Under

day of

Mar

examine

planatio

surveys t

BOOK-A-153

45

U. S. SURVEYOR GENERAL'S OFFICE,

Salt Lake City, Utah, June 30 *187*7

The foregoing field notes of the survey of the E. & W. Survey of the N. boundary Sub lines, *Township No.* 41 S. *Range No.* 13 W. *Executed by* Bailey & Burrill *Under* their Joint *contract of the* 4th *day of* Sept. *187*6, *in the month of* March *187*7, *having been critically examined, the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.*

Nathan Kimball

Surveyor General for Utah.

BOOK-

Exa

BOOK-A-153 49

Examined by C. H. Cramwell. C. C.

Field Notes
of the
Survey of the
Subdivision lines of
Township 41 South
Range 15 West
of the
Salt Lake Meridian
Utah Territory
by
J. G. Burnie
under print contract of
Bailey & Burnie
No 73.
dated Sep. 4th 1876

Surveyed April 6th & 7th 1877

50

BOOK-A-153

Township 41 South R. 15 West

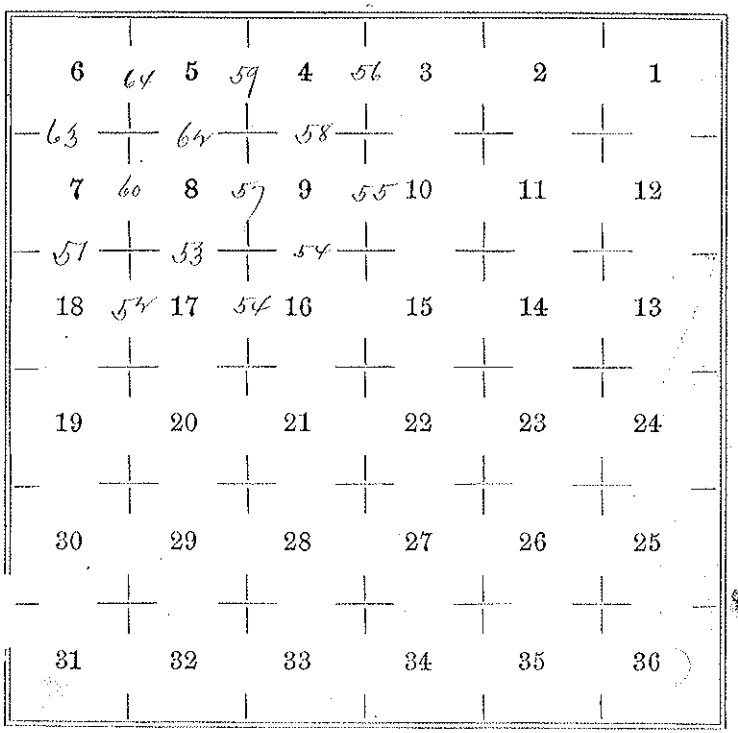

BOOK-A-153

Subdivision lines of T. 41 S. R. 15 W.
Salt Lake Meridian — 51

Chains

April 6th 1877 by J.G. Burile

Note: As the I & E portions of this township cannot be surveyed on account of the mountains I begin at the cor. to secs. 7 & 18 on the Pine Valley Guide Meridian and W. Boundary of this township and run

East on true line between secs 7 & 18

Var. 16° E.

9.50 Wood Road bears N.W. & S.E.

20.25 Gulch drains S.

32.00 Road bears N. & S.

37.50 Gulch drains S.W.

40.00 Set Trachyte 14 x 12 x 3 in 9 in deep marked 1/4 on N. side with mound of stone for 1/4 sec. cor.

62.50 Gulch drains S.E.

Subdivision lines of T. 41 S. R. 15 E.

Chains		Chains
66.50	Gulch (main) from "Twin Peak" canon drains S.W.	
80.00	Set limestone 26×8×3 in. 18 in deep notched 5 E & 4 S., with mound of stone for cor to secs 7. 8. 17 & 18	
	from which	
	A cedar stump 12 in. dia. bears N. 10° W 25 lks dist. marked S 18 T 41 S R 15 E.	
	Land broken & rocky	
	Soil 2nd rate	0.75
	Timber cedar & pine	4.50
		40.00

South between secs 17 & 18
Var 16° E.

Ascend

40.00	Set sandstone 11×10×5 in. 7 in deep marked 1/4 on W. side with mound of stone for	80.00

R. 15 W. Salt Lake Meridian —

BOOK-A-153

Chains

1/4 sec. cor. on S. edge of timber
Note: Abandon line here —
and "go to dinner" —
Land N. slope
Soil 2nd rate
Timber cedar & pine

East on true line
between secs 8 & 17
Var. 16 E.

Ascend

0.75 Gully drains N. W.
4.50 Road bears N. & S.
40.00 On W. slope set Trachyte
11 x 10 x 6 in 7 in deep marked
1/4 on N. side, with mound of
stone for 1/4 sec. cor.
80.00 On S. side of Twin Peaks
set sandstone 14 x 11 x 6 in 9 in
deep notched 4 E. & S. with

Subdivision lines of T. 41 S. R. 15 E.

Chains		Chains
	mound of stone for cor. to secs 8, 9, 16 & 17 —	20.00
	Land W. slope	40.00
	Soil 2nd rate	
	Timber cedar & pine	80.00
	South between secs 16 & 17	
	Var. 16° E.	
	Descend	
40.00	Set Sandstone 14 x 10 x 7 in.	
	9 in. deep marked 1/4 on W side	
	with mound of stone for 1/4 sec.	
Note:	Abundance fine herd grass S. slope	
	Soil 2nd rate	
	Timber cedar & pine	40.00
	East on true line between secs 9 & 16	
	Var 16° E.	80.00
	Descend	

Chains

20.00 Enter flat

40.00 Set trachyte 10 x 9 x 6 in. 6 in. deep marked 1/4 on N. side, with mound of stone for 1/4 sec. cor.

80.00 Set trachyte 10 x 9 x 6 in 6 in deep marked 3 notches on 6 & 4 on S. edges with mound of stones for cor. to secs 9, 10, 15 & 16

Land broken Soil 2nd rate Timber cedar & pine

North between secs 9 & 10
Var. 16° E.

40.00 Set sandstone 13 x 10 x 5 in 8 in. deep marked 1/4 on N. side with mound of stone for 1/4 sec. cor.

80.00 Set trachyte 20 x 12 x 8 in 15 in deep notched 3 E & 5 S. with

Subdivisional lines of T. 41 S. R. 15 W

BOOK-

Chains		
	mound of stone for cor. to secs 3, 4, 9 & 10	
	Land broken	
	Soil 2nd rate	
	Timber cedar & pine	
	North on true line between secs 3 & 4 Var. 16° E.	
	On account of broken ground offset W. 20 chs thence N. 60 chs thence E. 20 chs to	
60.00	on true line	2.50
80.32	Intersect 8th Standard Parall. 2.20 lks E. of Standard cor.	23.00
	to secs 33 & 34 T 40 S R 15	38.50
	where I set Trachyte 15 x 4 x 6 in. 10 in deep marked 3 noted	40.00
	on E & W, & 6 on Sedges CC	

R. 15 W. Salt Lake Meridian

BOOK-A-153

57

for closing cor to secs 3 & 4

Note: The ¼ sec. cor. falling in broken ground is not set

Land broken

Soil 2nd rate

Timber Cedar & pine

April 6th 1877 J. G. Burnell

April 7th 1877 by J. G. Burnell

From the cor. to secs 8, 9, 16 & 17 2 ans

North between secs 8 & 9

Var. 16° E.

2.50 Top of the S. E. Twin Peak descend

23.00 Enter flat

38.50 Twin peak canon gulch drains S. W.

40.00 On N. slope of canon mark a trachyte in place 6 x 30 x 6 ins

Subdivision lines of T. 44 S. Range

Chains	above ground 4 on W. side	Chains 24.00
	with mound of stone for 1/4 sec. cor	25.00
48.50	Main wood Road bears N.E. & S.W.	40.00
61.00	Road bears N.W. & S.E.	80.00
80.00	Set trachyte 20x13x9 in 15 in deep marked 4 notches on E. & 5 on W. edges, with mound of stone for cor to secs 4. 5. 8 & 9 from which	40.00
	A cedar 12 in. dia. bears N. 20	
	52 lks dist. marked B T 54.	80.00
	R 15 W. B. T.	
	Land broken	
	Soil and rocks	
	Timber Cedar & pine	

East on random line
between secs 4 & 9
Var. 16° E.

		40.00
20.90	Main Wood Road bears N & S.	

Chains

24.00 Wash in canon drains S., ahead

25.00 Road bears S.E. & N.W.

40.00 Set temporary 1/4 sec. cor.

80.00 Intersect N & S. line at cor. to secs 3, 4, 9 & 10 from which West on twp line between secs 4 & 9

40.00 Set sandstone 16 x 10 x 4 ins. 10 ins. deep marked 1/4 on N. side with mound of stone for 1/4 sec. cor.

80.00 The cor. to secs. 4, 5, 8 & 9

Level undulating
Soil red mix
Timber Cedar & pine

North on twp line between secs 4 & 5
Var. 16° E.

40.00 Set trachyte 16 x 16 x 6 ins 10 ins. deep marked 1/4 on W. side with

Subdivision lines of T. 41 S. R. 15 W.

Chains		
	mound of stone for ¼ sec. cor.	19.50
80.20	Intersect 8th Standard	30.00
	Parallel South 2.30 chs E of	40.00
	the Standard cor to secs 32 & 5	
	T 40 S. R 15 W. where I set	
	Trachyte 14 x 12 x 8 in. 9 in dep	
	notched 4 E, 2 W. & 6 S. &	
	marked C.C. and raised mou	
	of stone for closing cor to sd	54.00
	4 & 5	78.00
	Land mostly level	86.00
	Soil 2nd rate	
	Timber cedar & pine	

From the cor. to secs 7, 8
17 & 18 I run
North between secs 7 & 8
Var. 16° E.

3.00	Gully drains N. W.	
10.00	" " S. W.	

R. 15 W. of Salt Lake Meridian

19.50	Road bears N.W. & S.E.
30.00	" " N.E. & S.W.
40.00	Set trachyte 22 x 19 x 18 in 15 in deep marked ¼ on W. side with mound of stone for ¼ sec cor. from which A cedar stump 10 in dia bears N. 45 E. 20 lks dist marked ¼ S. B.T.
54.00	Hollow drains S.W.
78.00	Forks of roads bear N.W., E. & S.E.
80.00	Set trachyte 14 x 10 x 8 in 9 in deep notched 5 E ¼ S. with mound of stone for cor to secs. 5. 6. 7 & 8 from which A cedar 12 in. dia. bears S. 80 E. 15 lks dist marked S. 8 T 14 S R 15 W B.T.
	Land mostly level
	Soil 1st rate
	Timber cedar & pine

Subdivision lines of T. 41 S. R 1 W.

Chains		Chains
	East on random line between secs 5 & 8 Var 16° E.	
30.00	Gulch 20 ins S. W.	1.50
40.00	Set Temporary ¼ sec. cor.	8.00
57.00	Wood Road bears N. & S.	4.00
75.00	"Intersect" N. & S. line 15 lks	7.50
80.40	S. of cor. to secs 4, 5, 8 & 9 from which	80.90
	S. 89° 56' W. on true line between secs 5 & 8	
40.00	Set trachyte 14 x 10 x 4 in 9 deep marked ¼ on N. side with	40.90
	summit of stone for ¼ sec. cor from which	
	A cedar 12 in. dia. bears N 80	
	75 lks dist marked ¼ S. B. I.	
80.40	The cor to secs 5 6 7 & 8 Land level Scrub 1st rate Timber Cedar & pine	80.90

BOOK

R 1 W. Salt Lake Meridian — 63

Chains

West on random line
between secs 6 & 7
Var. 16° E.

1.50 Old Pine Valley Road bears NW & SE.

8.00 Hollow drains S. W.

40.00 Set temporary ¼ sec. cor.

47.50 Gulch drains S. W.

80.90 Intersect W. boundary of
Tp. 29 Lks N. of cor to secs 6 & 7
from which
N. 89° 47' E. on true line
between secs 6 & 7

80.90 Set trachyte 22 x 19 x 8 in 15 in
deep marked ¼ on N. side, with
mound of stone for ¼ sec. cor.
from which
A cedar stump 10 in. dia bears
N. 45 E. 140 lks dist marked ¼ S. B. T.

80.90 The cor. to secs 5, 6, 7 & 8
Land nearly level Soil 2nd rate

Subdivision 64 lines of T. 41 S. R 15 W.

Chains	Timber cedar & pine
	North on town line between secs 5 & 6 Var. 16° E.
40.00	Set trachyte 14 x 8 x 5 in 9 in deps marked 4 on W. side mound of stone for ¼ sec. cor
80.20	Intersect S. B. Standard Parallel South 2.97 chs & of the Standard cor to secs 31 & 32 T. 40 S R 15 W. where set Trachyte 24 x 12 x 8 in 18 in. deps marked 5 notches on E., 6 on S., & 1 on W. edges & C. C. and mound mound of stone for closing cor to secs 5 & 6 from which

BOOK-A-153

R 15 W. Salt Lake Meridian 6

A cedar 10 in. dia. bears
S 10 E 36 lks dist marked S 5
T 14 S R. 15 W. C.C. B.T.
Land mostly level
Soil 1st rate
Timber cedar & pine
April 7th 1874
J. G. Burnie

General Description

The lands in the surveyed portion of this township embrace a part of a cedar & pine timber bench furnishing thereon for the "Dixie" Settlements. The lands are agricultural

J. G. Burnie
U. S. Dep. Surv.

BOOK

U. S. S

Salt L

The for

Townshi

Executed

Under

day of

examine

planation

surveys th

BOOK-A-153

67

U. S. SURVEYOR GENERAL'S OFFICE.

Salt Lake City, Utah, June 30 *187* 7

The foregoing field notes of the survey of Sub
Subdivision Lines of
Township No. 41 S *Range No.* 15 W
Executed by Bailey & Burrill
Under joint- *contract of the* 4" *day of* Sept *187*6, *in the month of* April *187*7, *having been critically examined, the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.*

Chastan Kimball

Surveyor General for Utah.

BOOK

BOOK-A-153 3 71

Examined by C. H. Cranwell C. C.

Field Notes
of the Survey of the
Subdivision Lines of
Township No. 11 South
Range No. 16 West
of the
Salt Lake Meridian
Territory of Utah.
Surveyed by
John G. Bunnell
U. S. Dep. Surveyor
under joint contract of
Bailey & Bunnell
Dated Sept. 11th 1876.

"

Surveyed April 9th 1876.

"

93

BOOK-A-153

72

Township 141 Sioux R. 16 West

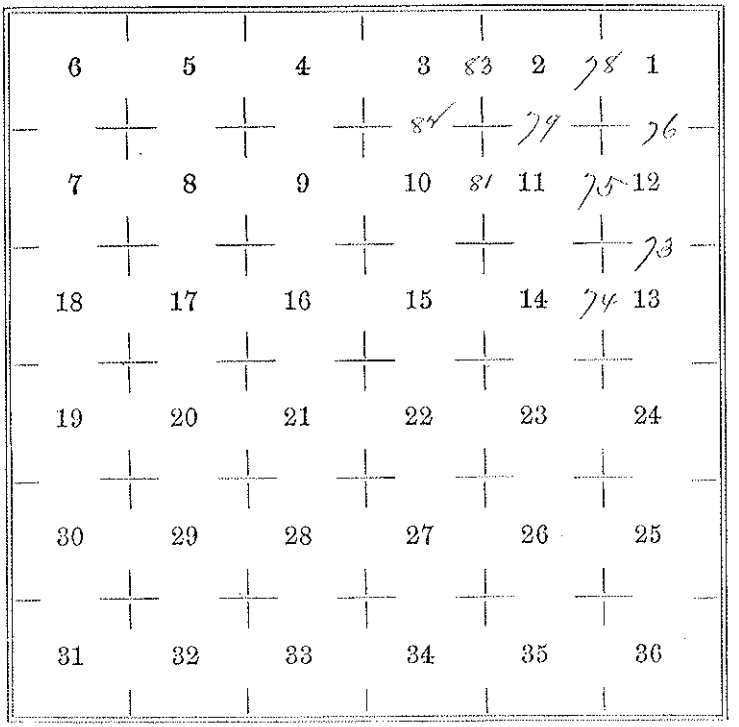

BOOK-A-153

Subdivisions for 41 S. R. 16 W.,
Salt Lake Meridian., 73

Chains, April 9th 1877,
By J. G. Burrill,
The S. & W. part of this Tp,
not being practicable to
survey, on account of the
Mountains, therefor from
the Cor. to Secs. 12 & 13 on
the Pine Valley Guide Meridian,
& E, boundary of the Tp,
I run,
West on true line,
between Secs. 12 & 13,
Var. 16° E.
40,00 Set trachyte 16 x 12 x 8 in,
11 in deep, marked 1/4 on N,
side, & raised mound of
stones for 1/4 Sec. Cor,
80,00 Set trachyte 18 x 8 x 6 in,
12 in, deep, notched 1 on E,
& 4 on S, edges, & raised

Subdivisions. Sec. 4, T. 8 S., R. 16 W.

Mound of stones for Cor. to Sections, 11, 12, 13 & 14

Land mostly level,
Soil 2nd rate,
Timber, a few scattering Cedars,

40,00

South between Secs. 13 & 14,

Var. 16° E,

Set Trachyte 14"x10"x6" und. 8" deep, marked 1/4 on W. side, & raised mound of stones for 1/4 Sec. Cor.

40,00

Note: Abandon line here,

Land Level,
Soil 2nd rate,
Timber, Scattering Cedars,

40,00

BOOK A-153

Salt Lake Meridian

Chains, West between Secs, 11 & 14,
Var, 16° E,
40,00 Set Sandstone 16x10x10 ins,
12 ins, deep, marked 1/4 on
N, side, & raised mound
of stones for 1/4 Sec, Cor,
Note, Abandon line here,
on account of breaks,
Land mostly level,
Soil 2nd rate,
Timber, & scattering Cedar,

North between Secs, 11 & 12,
Var, 16° E,
40,00 Set Trachyte 16x10x8 ins 12 ins,
deep, marked 1/4 on N, side
& raised mound of stones
for 1/4 Sec, Cor,
0,00 Descend,

Subdivisions 2, 41 R 16 W,

Chains.		Chains.
65,00	Foot of bachelor bench, ▽	13,10
	Enter, Manzano. Valley,	40,10
	bear E. ▽ N, ▽ old fence,	45,00
80,00	Sch sandstone, 14 x 10 x 5	
	in, 9 in, dep, ▽ in fence	73.25
	notched 1 on E, ▽ 5 on	
	edges, ▽ ~~raised~~ Mound	80,40
	of stones, for Cor to Sees,	
	1, 2, 11, ▽ 12,	
	Land mostly level,	
	Soil 2nd rate on bench,	
	1st rate in Valley,	40,20
	Timber, Cedar ▽ pin on bnd	

East on random line
between Sees, 1 ▽ 12,
Var, 16° E,

4,00	Ascend, ▽ lean field bear	0,40
	N, ▽ S,	

Salt Lake Meridian,

ains,	Enter bnd Bears N. & S.,
3,110	Sub temporary 1/4 Sec. Cor,
0,110	Ridge Bears N.W. & S.E. &
5,00	descend,
3.25	Road bears N.W. & S.E. in
	hollow, drains N.W.,
0,140	Intersect Pine Valley Guide
	Meridian 35 lks. N. of
	Cor. to Secs. 1 & 12, from which,
	N. 89° 45' W. on true line
	Witness Secs. 1 & 12,
0,20	Mark a trachyte pt. place,
	3 x 1 x 1 ft. 1/4 on N. side,
	& raised mound of stones
	for 1/4 Sec. Cor. from which,
	Cedar 4 in. dia. bears N.
	70° W. 20 lks. dist. marked
	1/4 S. B.T.
0,140	The Cor. to Secs. 1, 2, 11 & 12,
	Land mostly rolling,

Subdivisions, Tp. 41 S. R. 16 W.

Chains, Soil 2nd rate,
Timber, Cedar & pine,

North on true line (Returns
Sec. 1 & 2,
Var. 16° E,
since
16,00 Stone Wall, bears E & W,
leans West,
40,00 Set Sandstone 16 x 10 x 18 in,
12 in. deep, marked 1/4 on
N. side, & raised Mound
of stones for 1/4 Sec. Cor,
44,70 Mark Trees N,
44,70 Road bears N W & E,
51,50 Ascend Ridge
80,00 Intersect 8th Standard
Parallel South 7,20 Chs, 32,50
E. of the Standard Cor. to
Secs. 35 & 36, T. 40 S., 40,00

Thence R. 16 W, where Set a Quartzite rock, 18x11x5 Sd, 12 ins, deep, marked 1 Notch on E, 3 on N, & 6 on S, edges, & "C.C", & raised, mound of stones for closing Cor, to Secs, 1 & 2, Land mostly Level, Soil 1st rate, Partly cultivated, Timber a few Cedars on S, land,

From the Cor, to Secs, 1, 2, 11 & 12, West on true line, Between Secs, 2 & 11, Var, 16° E,

32,50 Foot of Trachyte Knuck, Bears N & S, descend & leave field

40,00 Top of Knuck South, Sets

Subdivisions T. 41 S. R. 16 W.

Chains,	Trachyte 14x12x10 in, 9 in, deep, marked 1/4 on N, side, ▽ raised mound of stones for 1/4 Sec. Cor, Dist	Chains,	
56,00	Enter flat bears N.E. ▽ S,		
56,25	Road bears N. ▽ S,		
58,00	Wash drains S,		
60,50	Telegraph line bears N. ▽ S	21,00	
73,50	Road of ridge bears N. ▽ S,		
77,00	Do of same, descend,	40,00	
79,50	Bear Camp,		
80,00	Set sandstone 14x12x6 in, 9 in, deep, marked 2 notches on E, ▽ S on S, edges, ▽ raised mound of stones for Cor. to Secs, 2, 3, 10 & 11, from which, A cedar, 12 ins. dia, bears, 60 N, 60 lks. dist, marked S, 10, T, 41 S. R. 16. W. B.		

Salt Lake Meridian

Land mostly level,
Soil 1st rate,
No timber,

South Return Sec. 10 & 11,
Var. 16° E.,
Foot of high ridge bears
N.E., & S.E.,
The true Cor. falls in ridge,
rock, therefore at 2,00
chs, Set a trachyte 20x10x4,
in, 15 in. deep, marked 1/4
N.C., on N. side raised
mound of stones for 1/4 Sec.
Cor.,
Note; Abandon line here,
Land Broken,
Soil 2nd rate,
Timber, Scattering pine & Cedar

Subdivisions. T. 41 S. R. 16 E. BOOK

Chains		Chains
	From the Cor, to Secs, 2, 3, 10 & 11, West on true line between Secs, 3 & 10,	11,00
	Var. 16° E,	11,00
15,00	Post of Ettinch Volcano,	
40,00	The true 1/4 Sec, Cor, falls in rocky side of the Volcano is not set therefore at 15 chs, Set Trachyte 16 x 10 x 6 ins, 12 ins deep, marked 1/4 N, E, on N, side & raised mound of stones, for Witness	20,00
	1/4 Sec, Cor,	
	Note; Abandon line here Land broken, Soil 2nd rate, No Timber,	

2, 3, hains, North on true line between Secs, 2 & 3, Var, 16° E,

3 & 10, 40,00 N. W. from ridge,
16° E, 40,00 At foot of volcano, Set
volcano, trachyte 20 x 10 x 10 in, 15
, falling in, deep, marked 1/4 on W,
e Volcano side, & raised mound
at of stones for 1/4 Sec. Cor,
yte 16 To avoid the Volcano I
ep, Offset E, 10 chs, thence
on N, N, 40,10 chs, thence W,
ound 10,00 chs, to
nes 20,10 Intersect 8th Standard
Parallel South, 2,20
chs. E. of Standard Cor,
to Secs, 34 & 35, T, 40 S,
R. 16 W. Where I set
a Lava rock 10 x 8 x 4 in,
6 in, deep, marked

2 notches E. 4 on N. & 6,
on Sedge & C.C. & raised
mound of lava rocks
for closing Cor. to Secs
2 & 3,..

Land mostly rocky
Soil 2nd " rate,
No Timber,
Note, Abandon further
Survey of this Twp. here
April 9th 1877,

J. G. Burrill,

General Description,

The surveyed lands of this
Township embrace the
extreme south end of
Damero Valley & a portion

of the timbered branch S. E. of same -

The lands are agricultural -

J. G. Burrill
U. S. Dep. Surveyor -

U. S. S

Salt L

The for

Township

Executed

Under

day of

April

examined

planations

surveys th

BOOK-A-153

U. S. SURVEYOR GENERAL'S OFFICE.

Salt Lake City, Utah, June 3d 1877

The foregoing field notes of the survey of the Subdivisional lines of *Township No.* 41 S *Range No.* 16 E. *Executed by* Bailey & Burrill *Under* Joint- *contract of the* 4th *day of* Sept- *1876, in the month of* April *1877, having been critically examined, the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.*

Nathan Kimball

Surveyor General for Utah.

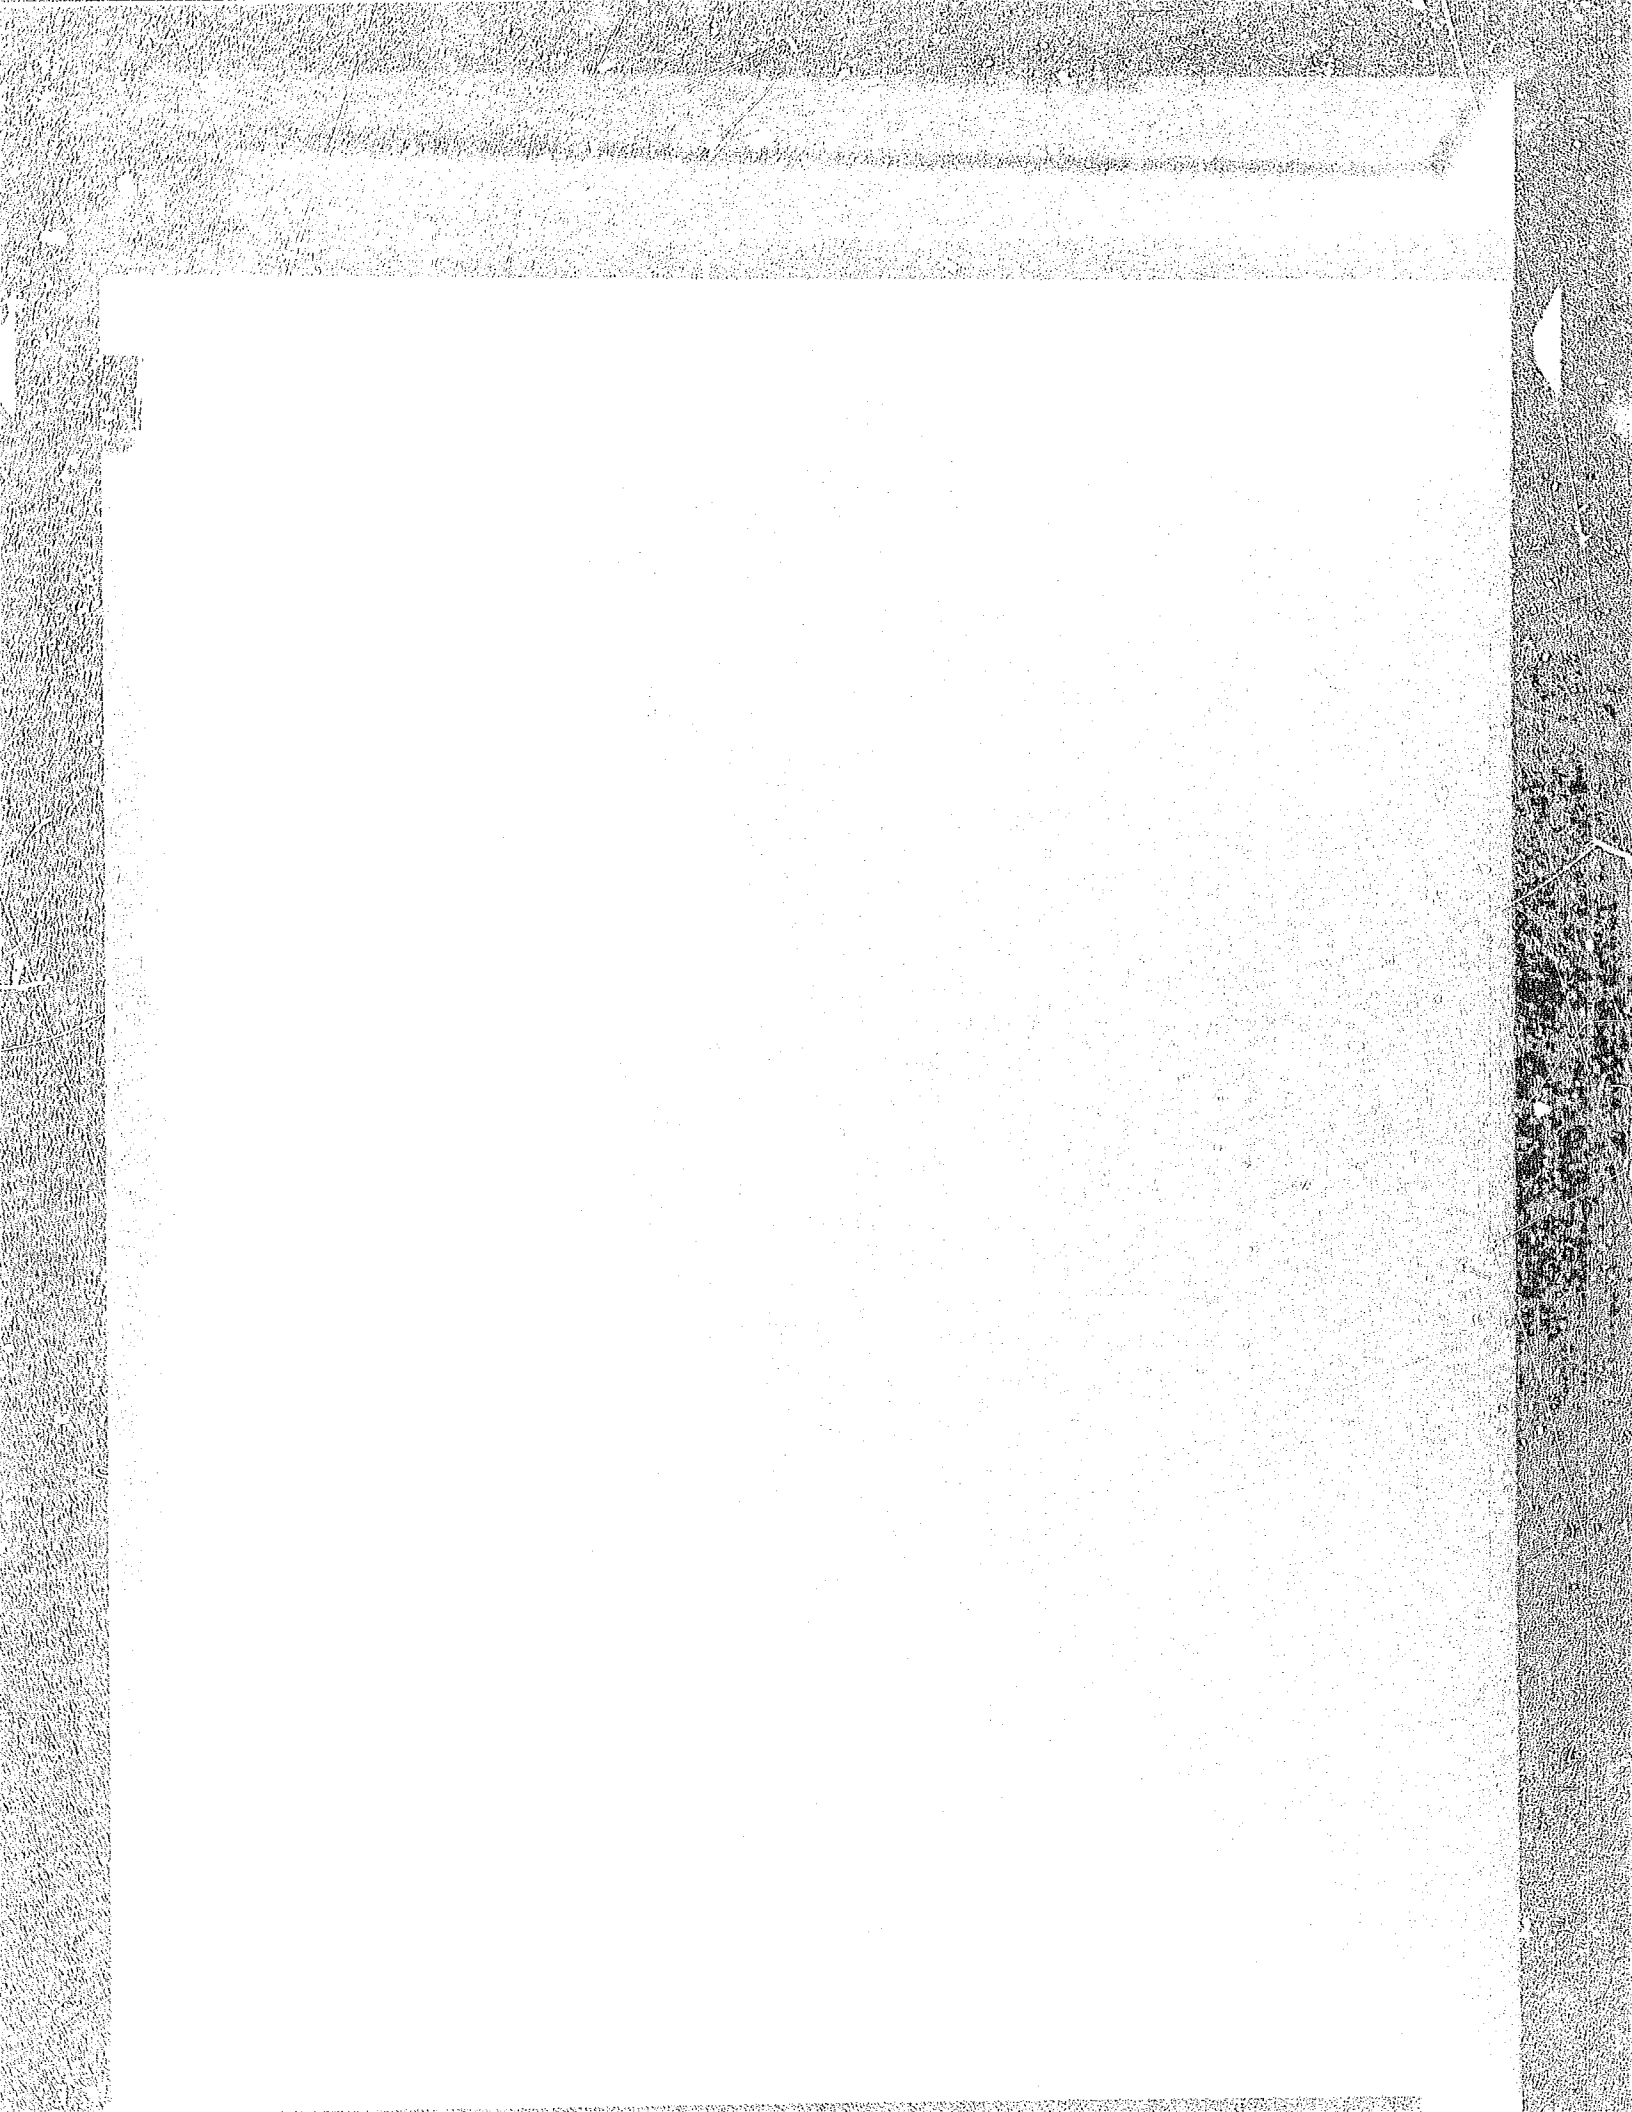

BOOK-A-1534

Td Examined by C.H. Cranwell. C.C.

Field Notes
of the
Survey of the
North boundary of
Township 42 South
Range 1 West
of the
Salt Lake Meridian
by
J. G. Burnie
under Joint contract of
Bailey & Burnie
No. 78.
dated Sept. 4th 1876

Surveyed March 9th 1877.

58

BOOK

BOOK-A-153

North Boundary of T. 42 S. R. 1 W. 92

Salt Lake Meridian

Survey commenced March 9th 1871

by J. G. Burrill

Note: The N. E. cor. of this township not being set on account of bluffs therefore from the cor. to T. 42 & 43 S. R's 1 & 2 W.

2 mm

East on true line between secs 6 & 31

Var. 15' 30" E.

19.00 Descend, foot of red sandstone ledge comb bears N & S.

27.00 Top of same, descend

34.00 Further chaining being impracticable on account of broken ridge I set a witness cor. for 1/4 sec cor viz:

A sandstone 12 x 10 x 10 in 8 in deep marked 1/4 W.C. on N. side, with Mound of stone — thence I offset 30.00 chains N. thence

mld. wood 1845. bearpe.

North Boundary of T. 42 S R 10 W. Sal

Chains	East 79.10 chains thence	
	South 30.00 chains to a point	
	33.10 chs East of	
80.00	The cor. found of secs 5 & 6, 31 & 32	
	where I mark stationary sand	
	stone 10x10x10 feet above ground	
	5 notches on E & 1 on W. edges 3 ft	
	and raise mound of stone for	81.00
	Witness cor. to secs 5.6.31 & 32	
	Land very broken	
	Soil 3rd rate	
	Timber a few scattering pine & ced	
	East on a true line.	
	between secs 5 & 32	
	Var. 15° 30' E.	
33.10	The witness cor. at post of mdg	
	bears NE & SW.	
40.00	On W. edge of wash draining N.	
	set sandstone 14 x 14 x 4 in	96.00

deps marked 1/4 on N. side,
with mound of stone for 1/4 sec cor.
as the line would then pass
over broken rdge points
2 offset 20.00 chains N.
thence 40.00 chs E — thence
20.00 chs S. to
the true cor. point where
I set a Rock 18 x 18 x 4 in
1/3 in deps marked 4 notches on
E & W sides Wedges with mound
of earth mixed from 4 pits each
12 x 12 x 12 in for cor to secs
4, 5, 32 & 33.
Land mostly broken. Soil 2nd
rate. No timber

East on true line between secs 4 & 33
Var. 15° 30' E
Paria River 75 lks wide

BOOK-A-153

North boundary of T 42 S R 11

Salt Lake Meridian

BOOK-A-1

Chains	
	mes S.
7.00	Road bears N & S.
40.00	Falls in bluff cannot be set
	therefrom at 9.00 chs. marked
	stationary Sandstone 4 x 1½ x 1
	above ground ¼ W.C. and mo
	mound of stone for witness ¼ se
	Note. On account of bluffs
	I abandon line here.
	Land broken Soil 2nd r
	No timber.

For general Description approval see end of subdivi Notes of this township.

March 9th 1877

J. G. Burnie

U.S. Dep. Surveyor.

BOOK-A-153

95

BOOK-A-153 5

Field Notes
of the
Subdivisions of
Township 42 South Range 1 West
Salt Lake Meridian
Utah Territory
as surveyed by
Bailey & Burrill
under joint contract Bailey & Burrill
No. 73. — dated Sept 4th 1876

Survey commenced March 10th 1877
" completed " 13th "

BOOK-A-153

88

Township 42 South **R.** 1 West

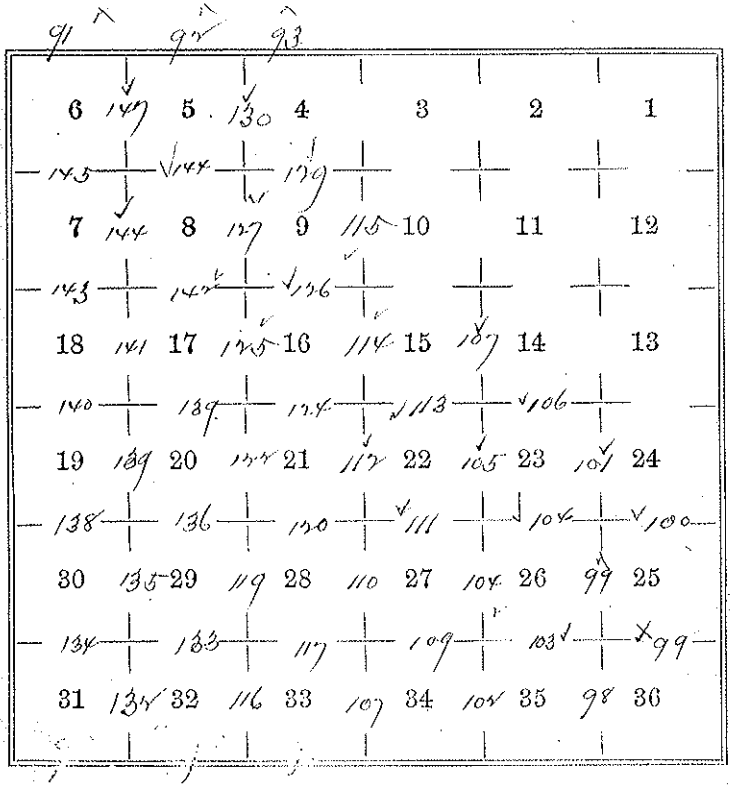

BOOK-A-153

Salt Lake Meridian

Chains	
	Va. 15° 30' E.
30.00	Bluffs, bear N. & S. descend
35.00	Foot of dune
40.00	Pit, temp. 1/4 sec. cor.
80.22	Intersect Salt Lake Meridian
	35 lks. S. of cor. Secs. 26 & 35
	from which
	S. 89° 45' W. on true line
	Pit. secs. 26 & 35
40.11	Pit, sandstone 16 x 10 x 6 in. 11 in.
	deep, marked 1/4 on N. side, mound
	of stone for 1/4 sec. cor.
42.	Tree cor. Secs. 25. 26. 35 & 36.
	Sand dunes, Pit 2 Rate
	Coal indications - No Timber

North, Pit. secs. 25 & 26

Va. 15° 30' E.

40.00 Pit, sandstone 18 x 9 x 4 in. 12

Subdivisions T. 42 S. R. 1 W.

Chains

Chains in. deep marked 1/4 on W. side 40.14
raised mound of stone for
1/4 sec. cor.

80.00 Set standstone 20×11×9 in. 10.27
in. deep notched 1 on E. & 2 on S.
edges raised mound of stone
for cor. to sec. 23. 24. 25 & 26
Land rolling - soil Gravelly.
Coal — No Timber

East on random line
bet. secs. 24 & 25
Va. 15°. 30' E.
Along the bluffs of Hoosy Bluffs Note:

40.00 Set temp. 1/4 sec. cor.

80.27 Intersect Salt Lake Meridian
1 link S. of cor. to secs. 24 & 25 from which
S. 89° 53' W. on true line
bet. secs. 24 & 25

	40.14	Set Sandstone, 16×8×4 in. 11 in. deep marked from N. side Brass mound of stone for ¼ sec. cor.
	10.27	Pine cor. Secs. 23-24-25-26. Sand rolling - Soil Sale Coal. — No Timber —
		North Lat. Secs. 23 & 24 Var. 15° 30' E. Ascend S. W. slope
	40.00	Set Sandstone, 16×10×4 in. 11 in. deep marked from N. side & raised mound of stone for ¼ sec. cor.
		I abandon line here on account of Bray Bluffs — Land broken S. W. slope. Soil Sale. — Coal indications No Timber —

Subdivisions T. 42 S. R. 1 W.

60 links	From the cor. to secs. 34 & 35 on south boundary north 60 l. secs. 34 & 35 Va. 15° 30' E.	60 links
	From the witness cor. 6.50 chs S. of true cor. I offset west 10.00 chs. thence North 6.50 chs. Thence East 10.00 chs to	40.00 / 80.17
40.00	On true line set standstone 18x10x6 in. 12 in. deep marked 1/4 on N. side raised round of stone for 1/4 sec. cor.	40.09
	Gulch drains S. W. 9.00 chs. S. of 1/4 sec. cor.	
80.00	Set Standstone 18x10x6 in. 12 in. deep notched 2 on E. & 1 on S. edges raised round of stone for cor. to secs. 26. 27. 34 & 35	80.17
	Land broken & rocky	

BOOK-A-153

Salt Lake Meridian

Chains Bril 33 Wats. — Coal.
to Winter —

East on random line
Mt. secs. 26 & 35
Va. 15° 30' E.

40.00 Set temp. 1/4 sec. cor.

80.17 Intersect N.S. line at cor. to secs. 26 & 35 from which
West on true line
Mt. secs. 26 & 35

40.09 Set Sandstone 20 x 9 x 4 in. 18 in. deep marked 1/4 on N. side & buried mound & stone for 1/4 sec. cor.

80.17 The cor. to secs. 26, 27, 34 & 35.
Land - rolling - Bril 2 Wats.
Coal — to Winter —

Subdivisions T. 4 S. R. 1 W.

Chains North bt. secs. 26 & 27

Va. 5° 30' E.

40.00 Set Sandstone 16x9x4 in. 11 in. deep marked 1/4 on N. side Raised mound of stone for 1/4 sec. cor.

80.00 Set Sandstone 20x9x4 in. 15 in. deep notched 2 on E & S. edges Raised mound of stone for cor. to secs. 22. 23. 26 & 27 Sand broken - Arizona. Coal - No Timber

---

East on random line bt. secs. 23 & 26

Va. 5° 30' E.

40.00 Set temp. 1/4 sec. cor.

80.16 Intersect N & S. line 17 lks. N. of cor. to secs. 23 & 26 from

Salt Lake Meridian

Chains | Which

N. 89° 53' W. on true line

Sec. Cor. 23 & 26

10.08 | Set Sandstone 20×9×4 ins 15 in. deep marked 1/4 on N. side | raised mound of stone for 1/4 sec. cor.

10.16 | The cor. Sec. 22. 23. 26 & 27. Land rolling - Soil Vale - Coal. — No Timber —

North, bet. Secs. 22 & 23

Va. 15° 30' E.

40.00 | Set Sandstone 15×10×4 in. 10 in. deep marked 1/4 on N. side | raised mound of stone for 1/4 Sec cor.

70.00 | Set Sandstone 15×10×6 in 10 in. deep notched 2 on E. & 3 on S. edges | raised mound of stone for cor. Secs 14. 15

Subdivisions T. 42 S. R. 21 W.

Chains 22823.

Land rolling - Soil 2nd rate.
Coal. - No Timber -

As the line East will strike the Gray Bluffs in less than 80 chs. I run East on true line

Set. secs. 14 & 23

Va. 10° 30' E.

40.00 At foot of Bluffs Bear S. 75 W. 9 S. E. set Sandstone 16 x 10 x 4 in. 11 in. deep marked 1/4 on S. side Raised mound of stone for 1/4 sec. cor.

Note: I abandon line here -
Land broken Soil 2nd rate
Indications of coal -
No Timber. -

Chains

40.00

Note:

2.00

Salt Lake Meridian

Mains From the cor. B secs. 14. 13. 22 & 23

North bt. secs. 14 & 15

Va. 15° 30' E.

40.00 Set Sandstone 16 x 10 x 4 in. 11 in. deep marked 1/4 on N. sided raised mound of stone for 1/4 sec. cor. in mouth of Indian head Ck.

Note: I abandon line here. Land undulating, soil Sandy No Timber —

Mar 10th 1877. T. C. Bailey

Mar 10th 1877 by J. H. Burrill

From the cor. B secs. 33 & 34 on the south boundary

North bt. secs. 33 & 34

Va. 15° 30' E.

1.00 East bank of Paria River

runs S. W. heads N. W.

Subdivisions T. 42 S., R. 1 W.

Chains	
10.00	To avoid Bluffs I offset West 7.00 chs. Thence North 30.00 chs. Thence East 7.00 chs. to
40.00	On true line, set Sandstone 14×12×7 in. 9 in. deep marked 1/4 on N. side & raised mound of stone for 1/4 sec. cor.
	Continue on offset line & note the Topography thereon
44.60	Fence, bears E & S.
64.50	Divide, return to bluff & lone Butte or hill
70.00	Perpendy, drains N.
74.00	" " " "
80.00	To point, Thence East 7.00 chs to
80.00	On true line mark Sandstone in place 6×4×4 feet above ground notched 3 on E & 1 on S.

BOOK-A

Sub

Chains	
	fo
	&
	fo
	&
	fr
	D
9.00	A
40.00	D
80.19	I
	D
	f
	f
40.10	D
	i
	f
	D

BOOK-A-153

Chains

sides raised mound of stone
for cor. to secs. 27. 28. 33 & 34
& on true line of Bluffs
Fork 3 Feet — No Timber —

East on random line
bet. secs. 27 & 34
Va. 15° 30' E.

9.00 Road N. side of Gulch to
Gulch head. N. E. cross it
40.00 Set temp. 1/4 sec. cor.
80.19 Intersect N & S. line at cor. to
secs. 27 & 34 from which
West on true line
bet. secs. 27 & 34
40.10 Set Sandstone 16 x 10 x 5 in. 11
in. deep marked 1/4 on N. side
raised mound of stone for 1/4
sec. cor.

Subdivision T. 4 S. R. 62 W. 6th P.M.

Chains
80.19 The cor. to secs. 27. 28. 33 & 34
Sand, broken rocks,
Pits, 3 Rate - Coal indication
No Timber —

North 1st. secs. 27 & 28
Va. 15° 30'. E.
Offset West 6.00 chs. Thence
North 15.00 chs. Thence East
6.00 chs. to
15.00 On true line in Gulch
drains N. Ascend bluff
29.00 Top of same bears S & W.
40.00 Pit Sandstone 16 x 12 x 6 in. 11
in. deep marked 1/4 on N. side
& raised mound of stone for
1/4 sec. cor.
56.00 Water Pockets on line
75.00 Near top of Bluff bears S & W.

BOOK

Chains
10.00
40.00
50.23

Salt Lake Meridian

4 chains	build mound of stone for back sight =
10.00	Mark Red Sandstone in place 8 x 4 x 2 feet above ground 3 on E & 2 notches on S. sides & raised mound of stone on the top of it for cor. to secs. 21, 22, 27 & 28 Land broken rocky and Dale. Indications of Coal No Timber =

East on random line
bet. secs. 22 & 27
Va. 15° 30' E.
Along S. side of canon.

40.00	Set temp. 1/4 sec. cor.
80.23	Intersect N & S. line 17 lks. S. of cor. to secs. 22 & 27 from which

Subdivisions T. 42. S. R. 1. W.

Chains	
	S. 89° 53'. W. on true line bet. secs. 22 & 27
40.12	Set Sandstone 16×9×6 in. 11 in. deep marked 1/4 on N. side & raised mound of stone for 1/4 sec. cor.
80.23	The cor. to secs. 21, 22, 27 & 28. Land broken rocky. Soil Poor Coal, indications - No Timber -

---

North bet. secs. 21 & 22

Va. 15° 30'. E.

5.00	Bottom of Cañon drains N.
8.00	Top of same
15.00	Head of Dry Ravine drains N.E. 10.00 chs. then joins one from the W. & drains S.
40.00	Coal vein in Ravines
	Deposit small stone mark

BOOK

Sub

Chains	
	5°. 50
60.50	
80.00	
40.00	
80.17	

Salt Lake Meridian

chains with a cross (+) in mound of earth from 4 pits each 24 x 12 x 12 in. for 1/4 sec. cor.

5. .50 Set Quartz trains S. & W.

6. .50 " " " S. W.

80.00 Set Sandstone 18 x 8 x 7 in. 8 in. deep notched 3 on E & S. edges & raised mound of stone for cor. to secs. 15. 16. 21 & 22

Land broken & rocky. Soil Sandy

Coal -- No Timber

East on Standard line

Mt. secs. 15 & 22

Va. 15° 30' E.

40.00 Set temp. 1/4 sec. cor.

80.17 Intersect N. & S. line at cor. to secs. 15 & 22 from which

Post on true line

Subdivisions T. 42 S. R. 1 W.

Chains, Lt. secs. 15 & 22.

40.09 Set Standstone 16×10×4 in. 11 in. deep marked from N. side, mound of stone for ¼ sec. cor.

80.17 The cor. to secs. 15. 16. 21. 22

Sandpolling - Soil Zonate

Coal indications - No Timber.

North, Lt. secs. 15 & 16

Va. 15° 30' E.

15.00 Set Scale Rock 13×9×6 in. 8 in. deep marked from N. side W. C. mound of stone for witness ¼ sec. cor. on account of Chalky Bluffs

40.00 I offset West 22.00 chs. Thence North 65.00 chs. to point 22.00 chs. West of

80.00 The true cor. which falling in

BOOK

Salt

Chains

BOOK-A-153

Salt Lake Meridian

Chains Bluffs is not set, therefor
chs cor.
at the point 22.00 west of true
point I mark a Shale Rock
in place 2½×2×1½ feet above
ground 3 notches on E & W sides
& N.C.
& raise mound of stone for witness
cor. W secs. 9. 10. 15 & 16
Sand broken rocky -
Soil Sandy - Coal -
No Timber -

North bet. secs. 9 & 10
Va. 15° 30' E
80.00 --- To arid bluffs 8 offset 30. chs. thence W. 40. chs. to
set sandstone 18"x12"x9" in cliffs, marked 1/4
S.E. & raise mound of stones for witness 1/4
S.C. cor. 30. chs. N. of true cor. point. Course
thence North on offset line
80.00 chs. to point 30.00 chs. West of
The true cor. falling in bluffs
cannot be set, therefor at
the point 30.00 chs. West I mark

Subdivisions T. 42. N. R. 1. W.

Chains Sandstone in place 2½ × 2 × 1 foot above
ground 3 notches on E & S on S. edge
& W. C. & raise mound of stone
for witness, cor. Secs. 3. 4. 9 & 10
at foot of Gray Bluffs bearing
N. W & S. E.
Sandrocky bluffs -
Soil 3d rate - No Timber -
Note: I abandon line here -
Mar 10th 1877 J. G. Burnett

Mar 12th 1877 by T. C. Bailey
From the cor. to Secs. 32 & 33 on
north boundary
North, bet. Secs. 32 & 33
Va. 15° 30' E.
5.00 Low Ridge bears E & W. mounds
of rocks 10.00 chs. East
16.00 Road bears E & W.

Chains
25.00
40.00
47.40
50.00

BOOK-A-153

Salt Lake Meridian

Chains
25.00. Wash drains S.

14.00 D.t Sandstone 18×10×6 ins. 12 ins.
left marked 1/4 on W. side buried
mound of earth from 4 pits each
24×12×12 ins. for 1/4 sec. cor.

17.40 Foot of Bluffs, bears 68° W.
mark S. face of rock $\frac{29 \mid 28}{32 \mid 33}$ W.c.
for witness cor. to sec. 28. 29. 32 & 33
from which Adairsville
bears East 40.00 chs.

50.00 Pace cor. falling in Bluffs is
not set.
Land S. part level, soil Sate
N. part rocky Bluffs, soil Sate
& Timber —

East on random line
bet. secs. 28 & 33
Va. 15° 30' E.

Subdivisions T. 42 S., R. 12 W.

Chains		Chains
	From the witness cor. 32.60 chs. S. & true cor. Point of Offset 32.60 chs to East 20.00 chs. thence North	
20.00	On true line, Set Quartzite 24x12 12, 18 in. deep marked 4 notches on E & W on S. edges, N. C. & raised mound of Stone for witness cor. to Secs. 28, 29, 32 & 33.	
29.00	Road bears N & S.	80.00
29.90	Ditch runs S.	
34.80	Paria River 50 lks. wide runs S. E. Leads N. E. Enters Bottom	
40.00	Set temporary 1/4 sec. cor.	
67.50	Wash drains S. W. Bears Bottom, bears N & S. Enters Bend	
80.00	Intersect N & S. line at cor. Secs. 28 & 33 from which West on true line Brt. Secs. 28 & 33	
40.00	Set Charred Cottonwood Post 4" x 4" x 4 in. 12 in. deep	40.00

Salt Lake Meridian

Chains

Marked 1/4 S. on N. side for 1/4 Sec. cor. from which
12" Cottonwood 3 in. dia. bears
S. 75 E. 40 lks. dist. marked 1/4 S B.T.
A White Sand Peak bears S.
89° 45' W. about 30.00 chs. dist.

80.00 Point
Thence N. 2 chs. Secs. 28. 29. 32 & 33.
Land mostly level bottom
Soil 1st & 2nd Rate -
No Timber -

North bet. Secs. 28 & 29
Va. 15° 30' E.
From witness cor. 20.00 chs.
East of true cor. Drive North
on offset line 40.00 ch. Thence
West 20.00 chs. to

40.00 On true line at East foot of
Bluffs bear N 75 E. set Sand -

Subdivisions T. 42 S. R. 1 W.

		Chains
Chains	stone 20x12x12 in. 15 in. deep,	
	marked from W side for 1/4 sec. cor.	3.00
	Continue North on offset	3.00
	line from 20.00 chs. East of	7.50
	true line 80.00 chs. thence	12.00
	West 17.00 chs. to a point	24.50
	3.00 chs. East of	32.50
80.00	The true cor. falling in	
	Bluff is not set. Therefor	
	at the point 3.00 chs. East I	
	set Sandstone 20x16x6 in.	80.00
	in. deep notched 4 on E & 2 on S.	
	edges & W. C. raised mound of	
	stone for cor. to secs. 20. 21. 28 & 29	
	Land on offset level bottom	
	Pine 1st rate - No Timber -	
		47.00

East on random line
bet. secs. 21 & 28

Salt Lake Meridian

Chains	
	Va. 15° 30' E.
3.00	Witness cor.
3.00	Pariah River 50 lks. wide, runs S.
7.50	" " " " " " N.W.
12.00	" " " " " " S.W.
24.50	Road bears N & S.
32.50	Foot of Bluff bears N & S.
	Offset South 10.00 chs. thence
	ascend gulch East 47.50 chs
	Thence North 10.00 chs. to
80.00	Intersect N & S line at cor. to
	secs. 21. 22. 27 & 28 from which
	West on true line
	Wt. secs. 21 & 28
	with the offset line going
	going east at
47.00	Mark Sandstone 3 x 2 x 2 feet
	above ground 1/4 on N. side
	& W.C. raise mound of stone

Subdivisions T. 42. S. R. 1 W.

Chains	
	for witness to sec. cor.
80.00	The, cor. bears. 20. 21. 28 & 29
	Land N. part, level, bottom
	soil, slate — E. part rocky
	Bluffs. soil & slate —
	Indications of coal —
	No Timber. —

North bet. secs. 20 & 21

Va. 15° 30' E.

	From witness cor. 3.00 chs. E.
	of true cor. point I run North
	on offset line 10.00 chs. thence
	West 3.00 chs. to
10.00	On true line
19.50	Paria River 50 lks. wide runs S.
39.00	" " " " " " S. W.
40.00	Set Sandstone 20 x 12 x 3 in. 15 in.
	deep marked 1/4 on N. side mound

Sale

Chains	
	A
	e
	W
	S
	N
41.00	W
45.00	
57.00	
60.00	
70.00	N
73.00	N
80.00	E
	d
	N
	S
	E
	E
	S
	E

BOOK-A-153

Salt Lake Meridian

Chains	
	mound of earth from 4 pits each 24×12×12 in for ¼ sec cor. from which
	A Cottonwood 8 in. dia. bears N. 10° W. 40 lks. dist. Marked B.T.
41.00	Paria River 50 lks. wide runs S.E.
45.00	" " " " " " S.W.
57.00	" " " " " " E.
60.00	" " " " " " S.W.
70.00	Bluffs bear N.E. & S.W. Ascend
73.00	Top of Dome
80.00	Set Boulder 13×10×8 in. 8 in. above ground notched 4 on E & 3 on S. edges raised mound of stone for cor. to secs. 16, 17, 20 & 21
	Land mostly level, bottom
	Soil, Sandy
	Timber a few Cottonwoods

Subdivisions T. 42. S. R. 1. W.

Chains	
	East on random line
	bet. secs. 16 & 21
	Va. 15° 30' E.
2.50	Bear Bluff bears N & S. coal
	vein 2 feet thick in E. slope
	of same -
10.00	Paria River 50 lks. wide runs
	S. W. heads N.
15.00	Road bears N & S.
30.00	Ascend Black Hills bear N & S.
40.00	Set temp. 1/4 sec. cor.
79.90	Intersect N & S. line 35 lks.
	N. of cor. to secs. 16 & 21
	from which -
	N. 89° 45' W. on true line
	bet. secs. 16 & 21
39.95	Set Sandstone 20 x 16 x 4 in.
	15 in. deep, marked 1/4 on N.
	side raised mound of earth

BOOK-

Sub

Chains	
79.90	

Salt Lake Meridian

Chains from 4 pits, each 24×12×12 in. for
1/4 sec. cor.

9.30 Thence to secs. 16, 17, 20 & 21
Land N. 1/2 level, bottom
E. 1/2 brake. Soil, dk. & gravelly
No Timber. —

North, Lt. secs. 16 & 17
Va. 15° 30' E.

2.00 Small Wash drains E.

4.50 Ravine drains E.

7.50 Knoll 50 lks. west

20.00 W. edge of Bottom, bears N. E. 95 E.

24.00 Set Sandstone 12×11×8 in. 8 in.
deep marked 1/4 on N. side
raised mound of stone for 1/4 sec. cor

26.00 Ridge bears S. W. & N. E.

30.50 Set Quartzite 20×12×4 in. 15
in. deep notched 4 in E & S. edges

Subdivisions T. 42 S. R. 17 W.

6 chains	Raised mound of stone for cor. to secs. 8. 9. 16 & 17 on Grand Hill - Land broken - Soil & Rate Is Timber. -	6 chains 58.50
	East on random line bet. secs. 9 & 16 Va. 15°. 30'. E.	40.00
	Descend	
10.00	Foot of Hill, Enter & Bottom & Bend of Paria River 50 lks. wide runs S. heads E.	10.00
23.50	Paria River 50 lks wide runs S. 85 W. heads N.	
18.00	Leave Bottom & ascend & Bench bears N. W. & S. E.	
	Bench runs out 10.00 chs. S. E.	10.00
40.00	Set temp. 1/4 sec. cor.	

Salt Lake Meridian

chains

58.50 Near foot of Grey Bluffs 1 foot high bearing S.W. & S. and Intersect witness cor.

The cor. point to secs. 9, 10, 15 & 16 from which

West on true line

Set sec. 9 & 16

40.00 Set Sandstone 16 x 10 x 4 in. 11 in. deep marked 1/4 on N. side raised mound of stone for 1/4 sec. cor.

80.00 The cor. to secs. 8, 9, 16 & 17. Land mostly level bottom Pah Vate. No Timber.

North 80 chs.

Va. 15° 30' E.

Descend

10.00 Canon drains E. 4 chs. 11. 30.00 chs. where it forks.

130

Subdivisions T. 42. S. R. 1. W. Salt

Chains one heading N & the other Chains S
South.

39.50 Quarter drains N. E.

40.00 Set Sandstone 16×10×5 ins.
11 ins. deep marked ¼ on W.
side raised mound of stone
for ¼ sec. cor. Thence offset 6.00 W
E. 6.00 chs. Thence North 13.50 E
40.00 chs. to point 6.00 chs. 24.50 E
East of
true
80.00 ¼ sec cor. which falling in 40.00 C
the bluffs cannot be set
thereon at the point
6.00 chs. E. at foot of Bluffs
bring
N & S. 10. E. Set Sandstone
18×10×9 ins. 12 ins. deep notched 50.00 S
4 on E & S and S. edges & W.C. raised
mound of stone for witness
cor. to sec. 4. 5. 8 9

BOOK-A-153

T. 1 N. Salt Lake Meridian.

other	chains	Land, broken, Soil & Vate-
		tation Timber.
		East on random line
0 x 5 in.		bet. secs. 4 & 9
on N.		Va. 15° 30' E.
of Eden		
offset	6.00	Witness cor.
orth	13.50	Enter cultivated land, bears N
rocks	24.50	Point Rock 50 lks. wide runs S.E.
	32.50	Road, bears N & S.
g in	40.00	On E. edge of Plowed land
set		set temp. 1/4 sec cor. from
nt		which Peter Shirts Old
Bluffs		Stone House & Fort, bears
tone		S. 37° 52' W. about 25.00 chs. dist
notch	50.00	Intersect witness cor. 30.
raised		00 chs. N. of
ness	80.00	The true cor. joint to secs.
		3. 4. 9 & 10 from which

Subdivisions T. 42. S. R. 2. W.

Chains West on true line
bet. secs. 4 & 9

40.00 Set Sandstone 17×10×5 in. 11 in. deep marked ¼ on N. side Raised mound of stone for ¼ sec. cor.

80.00 The cor. joint to secs. 4, 5, 8 & 9.

Land mostly level bottom Soil 1st rate. No Timber

North on random line bet. secs. 4 & 5

Va. 15. 30. E.

From the witness, 1 cut 6.00 chs. E. & true cor. I run North on offset line 23.00 chs. Thence West 6.00 chs. to

23.00 On true line at foot of hills

Salt Lake Meridian

chains | Bearings and Distances

	Bank of River 2.00 chs. E. of line
40.00	Set Stone, 1/4 sec. cor.
4.00	Pariette River 40 lks. wide runs S. E.
20.00	" " " " " " S. W.
1.00	" " " " " " S. E.
	Bank of fence 10.00 chs. E. on N. side of small cor.
5.00	Pariette River 40 lks. wide runs S. W.
8.00	Intersect N. boundary of Township at cor. 2 secs. 34 35 from which South on true line 81 ch. secs. 34 35
40.00	Set Sandstone 18 x 8 x 5 in. 12 in. deep marked 1/4 on N. side & raised mound of stone for 1/4 sec. cor.
10.00	The cor. 2 secs. 34. 35 Land in woody bottom

Subdivision T. 42. D. 22. 1. 22.

Chains	
	Pit Date. No Timber Pine on trees in lands within the woods comes Mar 2d 1877 T. C. Bailey
	Mar 2d 1877 by J. G. Burch from the cor. secs. 31 & 32 on the south boundary North 1/4 sec. 31 & 32 Va. 15° 30' E.
13.50	Wash drains N. E.
40.00	Set Chamfered Cedar Post 4 8 x 4 x 4 in. 12 in. deep marked 1/4 S. on W. side & raised mound of earth from 4 pits each 24 x 12 12 in. for 1/4 sec. cor.
9.00	Wash drains N. E.
52.00	" " E.
54.50	" " S. E.

Chains	
25.30	Set
20.00	Pi
	Se
	no
	m
	30
	Se
	N
	E
	Se
12.00	Fo
	5.
	Th
30.00	Pi
	co
	co
	fo

Salt Lake Meridian

drains
25.50 Wash drains S. W.

20.00 W. Wash drains S. E. set
Limestone 14×8×6 in. Giv. dish
notched 5 on E & 7 on S. edges raised
mound of stone for cor. to secs. 29.
30. 31 & 32

Land level, soil, Flats
to Dinner. —

East on random line
bet. secs. 29 & 32
Va. 15° 30' E.

12.00 Foot of steep Bluffs, bears E &
S. W. offset South 32.60 chs.
Thence East 68.00 chs. to
50.00 Intersect N & S. line at witness
cor. 32.60 chs. South of true
cor. point to secs. 29 & 32
from which

Subdivisions T. 4 S. R. 1 W.

Chains		
	West on true line, with offset, set Mt. secs. 29 & 32	80.00
40.00	Falling in Bluffs is not set therefore at 68.00 chs. set Quartzite 16×6×6 ins., 11 ins. deep marked 1/4 on N. side W.C. & W. witness raised mound & stone for 1/4 sec. cor. bing 28.00 chs. N. of true point	5.00
80.00	The cor. to secs. 29. 30. 31 & 32. Sand, level, Ant. Pati. No Timber	5.00
	West on true line Mt. secs. 30 & 31 Va. 13° 30' E.	
40.00	Set temp. 1/4 sec. cor.	2.50
45.00	Wash drains S. E.	20.00
75.00	The witness cor. 5.00 chs. East	

Salt Lake Meridian

chains of true point.

0.00 Intersection of N. boundary
of Township at cor. Secs. 30 & 31
from which
East on true line
Brs. E. 30 & 31
5.00 Wit. tree cor.
Set Brass Stone 20 x 12 x 6 in.
15 in. deep marked ¼ on N.
side raised mound of stone
for ¼ sec. cor.
0.00 T. cor. Secs. 29. 30. 31 & 32.
Land level - Soil Rocky
No Timber. —

North brt. secs. 29 & 30
Va. 15° 30' E.
2.00 Leave Wash Trends N. E.
20.00 Foot of Bluffs, bear E & N.
Further chaining on line

Subdivisions T. 4 S., R. 2 E., St. Helena Meridian.

Chains in place being impracticable

Set pet Brass Bolt 20 x 5 x 5 in. 20.00

16 in. deep marked 1/4 on N. side "W. C." raised mound of stone for witness 1/2 ... cor.

Then measure West 20.00 chs.

Thence North 60.00 chs. Thence East 20.00 chs to

80.00 At true cor. Point, Set Sandstone 11 x 10 x 6 in., 7 in. deep notched 5 on E. & 2 on S. edges raised mound Stones for cor. Poses. T. 4 S. R. 2 E. S. B. M.

Land Notes - April 2nd

Timber Heading Pine & Cedar

East on random line

Pt. Poses. 20.29

Va. 15. 30. E.

BOOK-A-153

Salt Lake Meridian

Set temp. 1/4 sec. cor.
Offset 10.00 chs. North Thence
East 13.00 chs. Thence South
10.00 chs. To the witness cor. 3.00
chs. East of true cor. joint of secs.
20. 21. 28 & 29 which makes
intersection as follows
Intersect N & S. line at cor.
joint 4 secs. 20. 21. 28 & 29
from which
Post on true line, with the offsets,
Set. secs. 20 & 29
Set Sandstone 10 x 10 x 6 in. 6 in.
deep marked 1/4 on S. side mound
mound of stone for 1/4 sec. cor.
The cor. 4 secs. 19. 20. 29 & 30
Land broken Hill 2 Dale
Timber standing Pine & Cedar.

Subdivisions T. 4 S. R. 2 W.

80 chains	West on random line bet. secs. 19 & 30 Va. 15° 30' E.
40.00	Set temp. ¼ sec. cor.
61.00	Bottom of dep. canon drains S. E.
70.32	Intersect N. boundary of Township at cor. to secs. 19 & 30 from which East on true line bet. secs. 19 & 30
40.32	Set standstone 12×10×7 in. 8 in. deep marked ¼ on S. side & mixed mound of stone for ¼ sec. cor.
80.32	The cor. to secs. 19, 20, 29 & 30 Land Broken, Soil Gravelly Timber-scattering Pine & Cedar

---

North bet. secs. 19 & 20
Va. 15° 30' E.

BOOK-A

Sale

chains 40.00	Set
80.00	Set
	Set
	Set
	Set
	Set
	Set
	Set
	Set
	Set
40.00	Set
70.36	Set
	Set
	Set
	Set
80.18	Set

Salt Lake Meridian

	Set Sandstone 16×11×5 in. 11 in. deep marked ¼ on N. side & raised mound of stone for ¼ sec. cor.
0.00	Set Sandstone 10×9×6 in. 6 in. deep notched S on E. & S on S. edge & raised mound of stone for cor.
	Sec. cors. 1, 18. 1920 Sand, broken - Soil & Rate - Timber, scattering Pine & Cedar

---

	East on random line Set. sec. 1920 Va. 15° 30. E.
0.00	Set temp. ¼ sec. cor.
0.36	Intersect N.S. line 35 lks. N. of cor. Secs. 1920 from which N. 89° 45. W. on True line Set. sec. 1920
0.18	Set Limestone 13×7×7 in. 8 in. deep

Subdivision T. 42. S. R. 1. W.

chains marked 14 on N. sides mound
mound of stone for 1/4 sec. cor.
80.36 The cor. Bears. 1/1.5./1920.
Land broken flat. Soil Dark
Timber scattering Pine & Cedar 0.10

West on random line
Pt. secs. 18 & 19
Va. 15°. 30'.
40.00 Set temp. 1/4 sec. cor.
60.00 Further chaining being im-
practicable on account of brok
nature of ground I cause a
flag to be set at witness cor.
18.50 chs. N. of true cor. Joint obs
triangulation ascertain the
length of my line to be 98.90 ch
intersecting said witness cor.
Subtracting 18.50 chs would giv

Salt Lake Meridian

Chains	
	Intersecting W. boundary at cor.
	point to secs. 18 & 19 from which
	East or true line
	bet. secs. 18 & 19
0.1.10	Set Conglomerate 11x10x6 in. 7 in. deep
	marked 1/4 on N. side raised mound
	of stone for 1/4 sec. cor.
0.1.10	Pile cor. Boxes. 17 18. 19 & 20
	Land broken - Soil Dry
	Timber - scattering Pine & Cedar -

North bet. secs. 17 & 18

Va. 15. 30 E.

0.1.10	Set Sandstone 17x10x7 in. 10 in. deep
	marked 1/4 on N. side raised mound
	of stone for 1/4 sec. cor.
0.1.00	Set conglomerate 20x10x7 in. 13
	in. deep, notched 4 on S. & E. & W. edges
	raised mound of stone for cor. to secs

Subdivisions T. 4 S. R. 8 E. M.

Chains 7.8.17918

Land broken, dips 2 rats

Timber - scattering Pine & Cedar

East on random line

bet. secs. 8 & 17

Va. 15° 30' E.

10.00 Set temp. 1/4 sec. cor.

11.00 Intersect S 85. line at cor. to

secs. 8 & 17 from which

Wet on the line

bet. secs. 8 & 17

40.00 Set Quartzite 16x12x10 in., 11 in.

deep marked 1/4 on N. side & raised

mound of stone for 1/4 sec. cor.

80.00 The cor. to secs. 7. 8. 17 & 18

Land broken, sloping N.

dips 2 rats - No Timber

Mar's &c. J. G. Burrill

Subdivisions

Chains

10.00

0.00

0.28

0.28

BOOK-A-153

163

Salt Lake Meridian

Tp. 1 S., R. 7 W., 7th Guide

Chains

First on random line

Brl. secs. 7 & 18

Var. 15° 30' E.

10.00 Set temp. 1/4 sec. cor.

0.00 Further chaining, bring in-

practicable on account of broken

ground, set a flag at witness

cor. 20.00 chs. N. of true cor. & ascertain

by triangulation the length of my

line to be 100.28 chs. - subtracting

20.00 chs. gives

0.28 Intersecting N. boundary of Town-

ship at cor. joint to secs. 7 & 18

from which

East on true line

Brl. secs. 7 & 18

0.28 Set Sandstone 16 x 10 x 9 in. 11 in.

deep marked 1/4 on N. side & raised

mound of stone for 1/4 sec. cor.

Subdivisions T. 42. S. R. 1. W.

Chains	
80.28	The cor. to secs. 7. 8. 17 & 18
	Sand stone. Pits 2 Pts.
	Timber scattering Pine & Cedar

North bet. secs. 7 & 8

Va. 15° 30' E.

40.00	Set Slate Rock. 16x10x2 in. 11 in. dep.
	marked 1/4 on W. side raised mound
	of stone for 1/4 sec. cor.
80.00	Set Sandstone 18x9x6 in. 12 in. dep.
	notched 5 on E. & S. edges & raised mound
	of stone for cor. to secs. 5. 6. 7 & 8
	Sand stone. Pits 2 Pts.
	Timber - scattering Pine & Cedar

East on random line

bet. secs. 5 & 8

Va. 15° 30' E.

40.00	Set Stone, 1/4 sec. cor.

Salt L

Chains	
5.00	On a
	23.00
	53.00
	cor.
0.17	Inte
	to sec
	Iron
	bet.
10.09	Set
	mou
	of sto
0.17	The c
	Sand
	Timb
	Iron
	bet.
40.00	Set

BOOK-A-153

Salt Lake Meridian

chains	
50.00	On account of broken ground Offset 23.00 chs. N. thence 26.17 chs. E. thence 23.00 S. to Witness cor. 6.00 chs. E. of true cor. point making at
50.17	Intersection of N & S. line at cor. point to secs. 4. 5. 8 & 9 from which Wit. on true line Brt. secs. 5 & 8
10.09	Set Sandstone 14×8×6 ins. 9 ins. deep marked 1/4 on N. side & raised mound of stone for 1/4 sec. cor.
50.17	Pre cor. to secs. 5. 6. 7 & 8 — Land broken, Soil & Rocky Timber - scattering Pine & Cedar

---

Wit. on random line
Brt. secs. 6 & 7
Va. 15° 30' E.

40.00	Set temp. 1/4 sec. cor.

Subdivisions T. 42. S. R. 1. W.

Chains	
70.00	Further chaining being im-
	practicable on account of boul-
	ders found I therefor cause a flat
	Stone set at witness cor. 20.00 chs.
	W. of true cor. found & find by
	triangulation the length of my
	line to Br 100.12 chs. subtracting
	20.00 chs. gives
80.12	Intersecting N. boundary of
	township at cor. joint to secs.
	687 from which
	East on true line
	Brt. secs. 687
40.12	Set Sandstone 10×10×6 in. 6 in
	deep marked 1/4 sec. N. side of mound
	mound of stones for 1/4 sec. cor.
80.12	The cor. to secs. 5. 6. 7 & 8
	Land broken - Soil Sandy
	Timber - scattering Cedar & Pine

Subdivisions

Chains	
	Nort
	Brt.
40.00	Set
6.00	Ora
	Offs
	N. to
	cor. f
40.00	Inte
	ship
	from
	Dou
	Brt.
40.00	Set
	deep
	mou
40.00	The
	Lan
	Tim
	Ma

BOOK-A-153

Mins North on random line
Alt. secs. 5 & 6
Va. 15° 30' E.

40.00 Set temp. 1/4 sec. cor.

6.00 On account of broken ground
Offset 33.10 chs. E. thence 20.00 chs
N. to witness cor. 33.10 chs. E. of true
cor. found

40.00 Intersect N. boundary of town-
ship at cor. found between secs 5 & 6
from which
South on true line
Alt. secs. 5 & 6.

40.00 Set sandstone 16 x 10 x 10 in. 11 in.
deep marked 1/4 on N. side mound
mound of stone for 1/4 sec. cor.

40.00 The cor. to secs. 5. 6. 7 & 8
Land broken Soil & Rocky
Timber scattering Pine & Cedar
Mar 13th 1877 T. C. Bailey

General Description

The surveyed lands in this township embrace the bottoms along the Paria River. a portion of which is under cultivation, & the Town of Adairsville, in Sec. 33 containing about 50 inhabitants. which lands I return as agricultural —

Having found croppings of coal in the bluffs on either side of the river I return the following as coal lands viz:

W 3/4 of S. 5. all of Secs 6. 7. 8. 17. 18. 19. 29 & 30. W 3/4 of Sec 20. N. 1/2 of N 1/2 Sec 32 - E 1/2 Sec 9. E 1/2 Sec 16. S 1/2 S. 1/2 Sec 15. S.W. 1/4 Sec 14. E 1/2 & E 1/2 of N.W. 1/4 Sec 21 - N 1/2 & S.E. 1/4 of N.E. 1/4 & N.E. 1/4 of S.E. 1/4 of Sec 26 all of secs 22 - 26 - 26 27 - 34 - 35 = 36 - S 1/2 & N W 1/4 of Sec 23 & S. W. 1/4 Sec 24 —

BOOK-A-153

T. C. Bailey
U. S. Dep. Surveyor

153

BOOK-A-153

U. S. SURVEYOR GENERAL'S OFFIC

Salt Lake City, Utah, June 21st 187

The foregoing field notes of the survey of

North Boundary & Subdivisions

Township No. 4 2 S *Range No.* 1 West

Executed by Bailey & Russell

Under said *contract of the* 4th

day of Sept *187*6*, in the month o*

March *187*7*, having been critically examined, the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.*

Nathan Kimball

Surveyor General for Utah.

BOOK-A-15

BOOK-A-153

8d Examined by C.H. Cranwell. C.C.

Field Notes

Of The Survey of the South, East & North boundaries

Of Township 1/2 South, Range 2 West

Of The Salt Lake Meridian, Utah Territory

By

J. G. Burrill.

Under Joint Contract of Bailey & Burrill No 13 dated Sept. 4th 1876.

Survey Commenced March 2nd 1877

" Completed March 3rd 1877

BOOK-A-153

154

Township 42 South **R.** 2 West

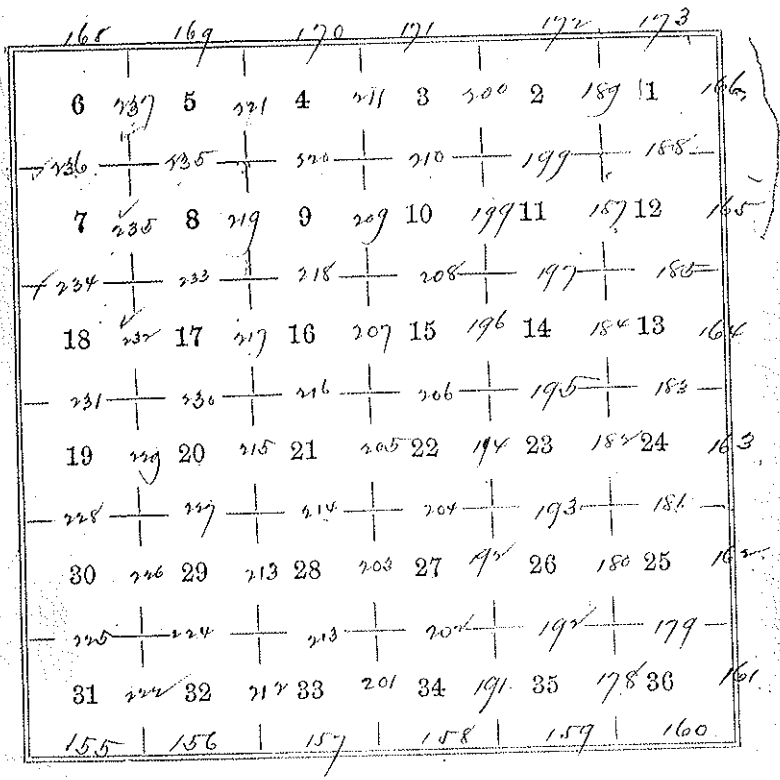

South Boundary Tp. 42, S. R. 2 W.
BOOK-A-153 Salt Lake Meridian 45

ines, March 2nd 1874,
By J. G. Burrill,
From the established Corner
to Tps 42 & 43 S. Rs. 2 & 3 W.
Drew,
East on true line bet
Secs, 6 & 31,
Var, 15° 30' E
4,000 Set Limestone 18x10x4 in,
12 in, deep, marked 1/4 on
N. side & raised mound
stone for 1/4 Sec, Cor,
5,000 On edge of Buckskin Gulch
drains S.E. Set limestone
16x16x12 in, 10 in, deep,
marked 3 notches on E &
1 on Wedges, & raised
mound of stones for Cor,
to Secs, 5. 6. 31 & 32.
Land broken & rocky

South bound'y Ch. 152 South

Chains, Soil 2nd rate,
Timber Pine & Cedar,

East on line line between
Secs, 5 & 32,
Var, 15° 30' E,
Iron cause & plug to be
set on line on E, edge of
Buckskin Gulch, and one
line North between Secs, 5
& 32, I run go to the
last mentioned flag &
then East on Offset line
15, 00 Chs, thence South 15,
Chs, to the flag on line
between Sections 5 & 32 a
On E, side of the Gulch,
Set limestone 14 x 10 x 4 in
11 in, deep, marked 1/4 on

15,00
40,00

BOOK-A-153

Range 2 West, Salt Lake Meridian.

ains N, side, ▽ raised mound
of stones, for 1/4 Sec. Cor,
Sec, 10 Set limestone 20 x 15 x 9 in,
15 in, deep, marked 4 Notches
on E, ▽ 2 on W, edges ▽ raised
mound of stones. for Cor to Secs, 4, 5 32 & 33
Land rolling,
Soil 2nd rate, rocky,
Timber, Cedar, Pine
& Juniper.

East on true line between
Secs, 4 & 33,
Var. 15° 30' E,
Quridge bears N.E. & S.W.
Set limestone 20 x 15 x 9 in,
15 in, deep, marked 1/4 on
N, side, ▽ raised mound
of stones for 1/4 Sec. Cor,

South boundary of T. 42. South

Chains

3,00 Set limestone 18x10x10 in.
12 in. deep, marked 3 Notches
on E. & 3 on W. edges &
raised mound of stones
for Cor. to Secs. 3, 4, 33 & 34.
Land rolling,
Soil Dry Prairie,
Timber, Cedar & Pine.

East on true line between
Secs. 3 & 34.
Var. 15° 30' E.

2,00 Built brick S.E.
4,00 Set limestone 16x10x8 in.
10 in. deep, marked 1/4 on
N. side, & raised mound
of stones, for 1/4 Sec. Cor.
Road bears E. & S.W.
7,00 Set limestone 18x10x4 in.
8,00 12 in. deep, marked 2 Notches

22,00
40,00
80,00

BOOK-A-153

Range 2 West Salt Lake Meridian

on E, & 1 on W, edges, & raised mound of stones, for Cor, to Secs, 2, 3, 34 & 35,
Land rolling & rocky,
Soil Sandy,
Timber, Cedar & pine,

East on true line between Secs. 2 & 35,
Var, 15° 30' E,

22,00 Gulch draining S. E,
40,00 Set Limestone 14 x 10 x 9 in. 10 in. deep, marked 1/4 on N. side & raised mound of stones for 1/4 Sec, Cor,
80,00 Set limestone 18 x 11 x 9 in, 12 in, deep, marked 1 notch on E, & 5 on W, edges & raised mound of stones for Cor, to Secs, 1, 2, 35 & 36,

Sec 1 Boundary Ps. 42 S. Range

Chains,	Land rolling & rocky,	Chains	
	Soil 2nd rate		
	Timber, Cedar & pine		
	East on true line, between		
	Secs, 1 & 36,		
	Var, 13° 30' E,	40,00	
	Record,		
4,00	Set limestone 15 x 10 x 14 in,		
	10 in, deep, marked 1/4 on N,		
	side traced pound up	48,00	
	stones for 1/4 Sec, Cor,		
3,00	Set limestone 24 x 10 x 9 in,		
	18 in, deep, marked 6 notches		
	on N, E, S, & W, edges for Cor,		
	to Ps, 42 & 43 S, Rs, 1 & 2 W,		
	Land E, slope rocky,		
	Soil 2nd rate,		
	Timber, Cedar & pine,		

Book 1 Park, Salt Lake Meridian 107

laims From the established Corner to
Sec's, 12 & 13 S, R, 102 W,
9 chs,
North on range line
Between Secs, 31 & 36,
Var, 15° 30' E,
Descend along E, slope,
40,00 Set Sandstone 20 x 9 x 4 in, 15 in,
deep, marked 1/4 cor W, side &
raised mound of stones for
1/4 Sec, Cor,
Gulch bearing N. E.
Offset East 5,00 chs,
Thence North on offset line
32,00 chs, to point — 5,00 chs,
East of true Cor, where I marked
rocky ledge 5 notches N, & 1
S, W E, & raised mound of
stones, for Witness corner to
Secs, 25, 30, 31, & 36, from which,

East boundary of 42 S. Range

Chains		
	A pine 12 in. dia. bears N. 85 E. 75 lks. dist. marked S. 30, T. 42 S. R. 1 W. B.T. Land broken & rocky Soil 3rd rate, Timber, scattering cedar,	
	North between Secs. 25 & 30, Var. 15° 30' E.	40.00
40.00	Continue on Offset line Set sandstone 16 x 10 x 4. 11 in. deep. marked 1/4 N.C. on W. side & raised mound of stones for witness 1/4 Sec. cor. 5.00 chs. E. of true cor. 80.00 chs. Thence West 5.00 chs to a point	80.00
80.00	on true line, Set Sandstone 16 x 10 x 5 in, 10 in, deep, marked 2 Notches North & 2 S. edges raised mound of stones for Cor. to Secs. 19, 24, 25, & 30, Land rocky & steep, Soil 3rd rate,	

BOOK-A-153

W. Salt Lake Meridian,

Township 1 South

Rock between Secs, 19 & 24,
Var, 13° 30' E,
The line being impracticable
in place I offset W, 2,000 chs,
Thence N, on offset ln. 40. chs. to
40.00 set Sandstone 15 x 12 x 9. 10 in. deep, marked
1/4 M.C. on N. side. Raised mound of stones
for witness 1/4 Sec. cor. 20. chs. N. of True cor.
Thence N. to 80. chs. thence E. 150 chs. to
point 18.50 chs. West of
80.00 The True Cor, which falling in
Red bluffs being N. & S. is not
set. Therefore at the point
18.50 chs. W. I set Limestone
18 x 14 x 4 in, 12 in. deep, marked
3 Notches on N. & 3 on S. edges
M.C. & raised mound of
stones for Witness cor. to Secs.
13, 18, 19, & 24 from which,
A pine 8 in. dia. bears N.

Oak boundary T. 42 S., Range

Chains, 40 lks, disk, marked S. T.
T. 42 S., R. 2 W., W. M. S. T.
Also, the 1/4 Sec. Cor. falls
in bluffs is not set.
Land broken rocky
Soil 3rd rate
Timber, a few cedars,
March 2nd 1894.

March 3d 1897

Ariz. between Secs. 13 & 18
Var. 15° 30' E.
The line being impracticable
in place 2 offset W. 2,000 ch.
Thence N. on offset line 40 chs. to
40.00 set sandstone 16 x 11 x 4 ins. deep, marked 1/4 S. C.
W. side, & raised mound of stones for witness 1/4
cor. 20 chs. N. of true cor. Meas. E. 80. chs.
about 20.80 chs. West of
80.00 the true cor. which falls 80.00
in the bed of bluffs bearing
N. & S. is not set, therefore
at this point, 20.00 chs. W.

2 West Salt Lake Meridian.

I mark a Sandstone 12 x 10 x 10 ft. above ground 2 notches on N. & S. sides. M.C. & raised mound of stones for Witness corner to Secs. 7, 12, 13 & 18.

Note; The true 1/4 Sec. Cor. falling in the bluffs is not set, Land rocky, West slope, Soil Gravelly, No timber,

North between Secs. 7 & 12, Var. 15° 30' E,

Continue on offset line to set Sandstone 18 x 9 x 4. 12 in. deep. Marked 1/4 S.C. on N. side & raised mound of stones for Witness 1/4 Sec. Cor. 20. lks. N. of true cor. Continue N. to 80. chs. thence E. 280. chs. to on true line, Mark a Sandstone in place 4 x 3 x 2 ft. above ground 1 notch on N. & S. edges, & raised mound of stones for Cor. to Secs. 1. 6. 7 & 12.

East [illegible] 29, 12 [illegible]

Chains from wreck,

Spine Pin. dia. bears N.
80, E. 60 lks. dish, marked
S. C. J. 1/4 S. R. 1 W. W. J.
Note; The 1/4 Sec. Cor. falls
in bluffs & not set.
Land rocky W. slope,
Soil Prairie,
No timber.

North between Secs. 1 & 6,
Var. 15° 30' E.
Along W. slope,

40,00 Set sandstone 16x10x4 in. 10 in
marked 1/4 on W. side
Buried mound of stones
for 1/4 Sec. Cor. bears
Bluffs bear S.E. & N.E.

80,00 Set sandstone 18x12x8 in.

2 West Salt Lake Meridian

marked
12 in. dia., 6 notches on N. E. S.
v Pt. v mound of stones
v Pt. edged, for Cor. to Tps. 1 1/
v 1/2 S., Rs. 1 v 2 W. on E. side
of House Rock Valley.
Land rocky— broken,
Soil 2nd rate,
Timber, a few cedars.

From the Cor. to Tps. 1 v 1/2 S.,
Rs. 1 v 2 West, I run West
on random line between
said Townships, the Variation
being 16° 30' E. by Burts
improved Solar Compass,
setting temporary Half mile v
mile Corners at every 40.00
v 80.00 chs. I find the length
of the line to be 5 miles 79
chs. v 50 lks. v the falling to

North boundary Th, 42 Rang, 2 West,

	68 96 lks, North of the Township Corner, The Correct for the true line will therefore be 16 lks, S, per, mile v the bearing N, 89, 53 E.
	From the Cor, to Ths, 41 & 42 S, Rs, 2 & 3 W, I run N, 89, 53, E, on true line Return Secs, 6 & 31
	Var, 15° 30' E,
8,50	Mark drains S,E,
36,30	" " "
39,50	Set Sandstone 12x10x6 in, 10 in, deep, marked ¼ on 4 sides, & raised mound of earth from 4 pits each 24x12x12 in, for ¼ Sec, C
53,00	Mark drains S, W,
79,50	Set Chamfered Cedar Post 4x4x4 in, 12 in, deep

BOOK-A

BOOK-A-153

Range 1 West, Salt Lake Meridian

marked 5 notches on E, & 1
on W, sides & raised mound
of earth from 4 pits each 24
x 12 x 12 in, for cor, to Secs, 5. 6.
31, & 32,
Land nearly level,
Soil Private,
Timber, A few cedars,

---

on true line
N. 89, 53 E, between Secs,
5 & 32,
Var, 15° 30' E,
Set Sandstone 14 x 8 x 3 in, 10 in,
deep, marked 1/4 on N, side,
& raised mound of earth
from 4 pits, each 24 x 12 x 12 in,
for 1/4 Sec. Cor,
Wash drains S. E.
Road bears N. E. & S. W.

170

North Boundary T. 41 S., Range 2 West

Chains.

80,00 Set a charred cedar post, 4 8 x 4 x 4 in., 12 in. deep, marked 4 notches on E. & 2 on W. edges, & raised mound of earth from 4 pits each 24 x 12 x 12 in., for Cor. to Secs. 4, 5, 32 & 33, Land level, Soil 1st rate, No timber.

N. true line

40,00 N. 89° 53' E. between Secs. 4 & 33, Var. 15° 30' E.

Set, charred cedar post 4 8 x 4 x 4 in., 12 in. deep, marked 1/4 S. on N. side, raised mound of earth from 4 pits each 24 x 12 x 12 in., for 1/4 Sec. Cor.

67.70 Road bears N.E. & S.W.

West Dakota Meridian

Set charred cedar post, 4 8" x 4" x 4 in, 12 in, deep, marked 3 notches on E, & 3, on W, edges/ Raised mound of earth, from 4 pits each 24 x 12 x 12 in, for Cor, to Secs, 3, 4, 33, & 34

Land Level,

Sold Prairie,

No Timber,

---

on true line

N, 89, 53 E, between

Secs, 3 & 34,

Var, 15° 30' E,

Set Sandstone 19 x 15 x 3 in, 13 in, deep, marked 1/4 on N, side, Raised mound of stones for 1/4 Sec, Cor, in Gap between two hills

Set Sandstone 16 x 12 x 2 in, 10 in,

North boundary of 42 S, R ... E

West, e

Cedar

deep, marked 2 notches
& 4 on Pickets, & raised
mound of earth from 4 pits
each 2' x 12 x 12 in, for Cor,
to Sec, 2, 33 4/ & 35'
Land, level,
Soil 1st rate,
Timber,

21 in,
S, &
mou
Sec,
A C
1/5
S. 2
A
To C
36,
Lan
So
Tim

N, 89, 35 6, on line,
between Sec, 2 & 35,
Var, 15° 30' E,

38,00 Cedar cedars N & S,

18,00 Set Cedar post 48 x 4 x 4 in,
12 in, deep, marked 1/4 S, on
N, side, & raised mound
of earth from 4 pits each
2' x 12 x 12 in for 1/4 Sec, Cor

8,00 Set Handstone 30 x 14 x 3 in

N,
Ce
Pla
San

BOOK-A-153

2 West, Salt Lake Meridian

21 in. deep, marked / notch on
S. & E. sides on W. edge & raised
mound of stones. for Cor. to
Secs. 1, 2, 35 & 36, from which
A Cedar 12 in. dia. bears S.
1/2 W. 4 lks. dish, marked
S. 2. T. 1 S. R. 2 W. B. T.
A Cedar 15 in. dia. bears N.
50 E. 35 lks. dish, marked S.
36, T 1 S. R. 2 W. B. T.
Land undulating.
Soil 1st rate,
Timber, Cedar on E 1/2.

N. 89° 55' E. on true line
between Sec. 1 & 36.
Var. 15° 30' E.
Wash drains S. E.
Sandstone ledge bears N. W.

BOOK-A

Book, Boundary Dkt. 1-2 Sec 6, Page 2

Chains	▽ S.E. ▽ Cedar Timber
4,00	Set Sandstone 13x8x6in
	9 in, deep, marked 1/4 on
	E. side, ▽ ruined mound
	of stone for 1/4 Sec. Cor,
11,00	Head of Gully, drains S,
16,00	Road bears N.W.S. on
	flat forming the N. End
	of Mouse rock Valley
80,00	The Cor. to Secs, 4, 5, 8 & 9,
	T. 1 N. R. 2 W.
	Land rolling,
	Soil 1st & 2nd rate,
	Timber, Cedar on N. part
	March 3rd 1874,
	J. G. Burrell,
	U. S. Deputy Surveyor.

BOOK-A-153

Range 2 West Salt Lake Meridian

Notes for General Description

& Official Survey and U.S. Land

Division Notes of the Ten

UK-A-155 1 copies 137

Office S.L.M.
& compared

Field Notes
of the
Subdivision of
Township 12 South Range 2 West
of
Salt Lake Meridian
Utah Territory
as surveyed by
Bailey & Bennett
under instructions contained in Bailey & Bennett's
No. 73 — dated Sept 4th 1876

Survey commenced March 5th 1877
" completed " 6th "

Subdivisions T. 42 S. R. 2. W.

Chains | Mar 3rd 1870 by J. G. Bailey
Surveyor. Commences on the range
line between 35 & 36 on the
North boundary of the
Township
Set P. & S. Cor. 35 & 36
Va. 15° 30' E.
20.00 Gulch chains N. E.
40.00 Set Limestone 16×10×6 in.
in deep mounded 3 ft. W.
side raised mound of stone
for Section.
48.00 Gulch chains S. E.
68.00 " " E.
80.00 Set Limestone 18×10×4 in.
12 in. deep mounded 1 m. E. & S.
edges raised mound of stone
for cor. to Secs. 2. 5. 26. 35 & 36
Land rolling, Soil 2nd rate
Timber Cedar & Pine —

Chains
20.00
40.00
55.00
80.00
40.00

Salt Lake Meridian

Chains, Basis on random line
Int. Sec. 25 & 36
Tp. 2 S. 3 E.

21.00 Gulch dam. N.E. Ascend
40.00 Pile stone, in sec. cor.
55.00 Ridge spurs N.E. & S.W.
From this point I course a
flag to bear at the witness
cor. 5.00 chs. past. & this corner
point I by triangulation find
the distance to be 20.00 chs.
east, which gives
80.00 To intersection of the true cor.
point to Sec. 25 & 36 on the
east boundary from which
I set on true line
Int. Sec. 25 & 36
40.00 Set Limestone 18x10x5 ins. 2
in. deep marked stone.

Subdivisions T 42 S. R 22 E.

Chains, sides Raised, pround of
stone, for 1/4 sec. cor.
80.00 Theor. to sec. 26 26.35 4.36
Lands, bottom & slope
Ash, 2 Trees.
Timber, scattering Cedar & Pine

North Bd., sec. 35 & 26
Var. 15° E.

36.00 Subdivision N. E.
40.00 Set Sandstone 16x10x4 in. mkd. 1/4
mkd. In mt. witness mound
mound of stone for 1/4 sec. cor.
119.00 Road, bears N. E. & S. W.
80.00 Set Sandstone 16x9x1 in. 12 in.
deep, notched 1 on E & 2 on S. edges
Raised mound of stone for
cor. to sec. 23. 24. 26 & 26
Lands, bottom - with Trees

N. Salt Lake Meridian

	Chains	Links = Cedar Point
		East on random lines
		bet. secs. 31 & 25
		Ca. S. 306.
	4.00	Road Bears N. 8. W. N. Descend
	40.00	Set temp. for sec. cor.
	119.00	Gulch drains N. & E.
	60.10	Intersect Cat witness, cor. 20.
		00 chs west of
	80.10	The Base cor. point to secs. 24 & 25 on east boundary of the Township from which Wit. on Base lines bet. secs. 24 & 25
	40.05	Set Sandstone 15x10x5 ins. 10 ins. deep mounded 1 foot N. & W. & S. & E. and inscribed as shown for Wit.
	80.10	The cor. to secs. 23. 24. 25 & 26

1877

Subdivision of S. 33. T. 5. N. R. 2. W.

Chains. Road, Section Meeting
Field Notes.
Linder Specifications.

March 26, 1877.
Due 15th. 30 d.

100.00 to Embankment 30 × 9 × 3 inches
deep from adjoining Ditch and
ground & stone for 2 culverts. 10.00

460.00 Gulch drains A. & E.

80.00 Creek Embankment for 2 culverts
24 × 20 × 2 in deep ground & stone 27.00
ground & stone for culverts 30.00
14. 23 & 24 from W. bank 32.00
Abedan Jim. dis. from S. E. M. 66 40.00
Chs. dist. marked S. 23. T. 4 S. R. 2 W. 61.50
F. B. T.
A. Bedan Jim. dis. from N. 15. M. 6
Chs. dist. marked S. 14. B. T.

BOOK-A-155

South Eastern Canadian

Chains Description of Lots

Pine Lake

Cedar Points

East Cornwall Road

Con. 15. 30 E.

Deseard

10.00 Lot 6 of Mackerbin Plateau

Bars N.S. Enter Forest Rock

Valley

28.90 Road Bars N. & S.

30.00 Bank drains S. & E.

32.00 " " S.

10.00 Pt Lot 4 Con. Cor.

61.50 Lot 6 of Bluffs Bars N.S. on E.

side Homestead Valley & Cattle

Pt Cattle Wilcox Cor. 18.50.

Sh. Pt. of

Subdivisions No 2, of N. ½ 7, 11.

BOO

Chains		Chains
	Towns. 13 24.	
80.00	Rec. Line, on E. Boundary	79.00
	of Township from which	80.00
	Post on Rec. Line	
	40 l. Towns. 13 24 21	
40.00	Pile Stone 15 x 12 x 10 in.	
	Ref. marked in each side	
	raised mound of earth from	
	4 pits each 24 x 12 x 12 in. for Quar. Sec.	
80.00	Rec. Cor. Towns. 13. 14. 23 24.	
	Land Posting - Side 42 Trees	
	Timber - Sandstone & Pines.	

North. Bdy. Towns. 13 24

Var. 15° 30. E.

10.00	Gate Chains E.	
40.00	Pile Stone 15 x 10 x 8 in. 10 in	
	Ref. marked in each side	0.75
	raised mounds of earth from	20.00
	4 pits each 24 x 12 x 12 in. for Quar. Sec.	

Salt Lake Meridian

Chains	
79.00	Gulch drains S. E.
80.00	Rabbit Diamond Lode 20 x 1200 ft. 15 links in the Intersection on the S. edges Mineral Monument of stone for Cor. to secs. 11, 12, 13 & 14 from which Witness Aspen Cedar bears S. 65° W. 106 links dist. Marked S. 11 W. 12 S. R. 3 W. S. L.
	A Cedar 4 in. dia. bears S. 63° W. 160 links dist. Marked S. 14 S. L.
	Land broken. Soil Rocky Timber Cedar

East on random line
Mt. secs. 13 & 13
Va. 15° 30' E.

0.75	Gulch drains S. E.
20.00	Foot of mountains, Granite S.
	Enter Narrow Rocky Valley

Subdivision No. 2. Nov. 2.

Chains		Chains
32.00	Bank Grain S.	
36.00	Road from A.V.	
10.00	Cabbage Tree Swamp.	
16.50	Bank Grain S.	
60.00	Intersect at witness Cor.	
	20.00 chs west off	40.00
80.00	The true Cor. from which Bears 213	13.50
	on the E. boundary of this town-	24.50
	ship from which	36.00
	Wall on true Lines	40.00
	Art. Bears 132 1/2	
10.00	Pile Sandstone 20×12×12 ins 1.5	
	ins deep marked from N. side	
	raised mound Pearth from	
	pit 12 ft 12×12×12 ins for Pl. Cor.	
	Cor. from which	
	Cedar Pins dia. Bears S.80. E.	15.74
	35 lks. dist. marked fm S. B.T.	80.00
80.00	The Cor. to Cor. No 2. 132 1/2 ins.	

Chains Landpolling Dois Fa Dale
to Eamor-

North Mt. ocas. 1/8 1/2
Va. 15° 30. E.

4.50 Plashdrains, E.
13.50 " " "
24.50 " " N. E.
26.00 Deepcutting gulch drains S. E.
40.00 Apt. Limestone 36 x 15 x 5 in 28
in depth, marked from N. side
Painted, mound of stone
for 4 acres, from which
Meadows in drains bears S. 32.
E. 2 miles dist. marked 4 S.
B. T.
E. 15.40 Gulch drains E.
80.00 Apt Limestone 30 x 20 x 5 in 20
in depression behind 1 on 685 m S.

Subdivision Sec. 2. S. of B. & M.

Chains | Edges of Forties Dec. 12, 1912

Base Line

N. Cedar Swindia, brass S. 85 W.

30 Wm. Sherman's S. 1/4 Post

S. 85 W. 21.87 Bk.

Rands broken S. slope

Set 2" Hub Facing

Timber Cedar Pine

East on random line

Dec 12 1912

Var. 15° 30' E.

Record

20.00 Ravine drain S. E.

30.00 Bluff to brass N & S.

40.00 Set temp. Sec. cor.

Enter Siding

112.00 Wash drains S.

142.50 Road brass N & S.

Salt Lake Meridian 87

Chains	
77.00	Foot of Bluffs accord to
80.50	Intersect east boundary of
	Township 1 North, Range 1 West
	accos. 1912 from which
	N. 89° 53' W. on true line
	Mt. accos. 1912
40.25	Set Limestone 18x14x3 ins. 12 ins
	deep marked from N. side Drained
	mound of stone for 1/4 accos. Cor.
	from which
	A Cedar 20 ins. dia. bears East
	165 lks. dist. Scribed 1/4 S. B. T.
80.50	Three Corr. accos. 1. 2. 1912
	Randall's Addition, Brick Date
	E. Annatto, level, Brick Date
	Thomas Cedar

North on random line
Mt. accos. 1912

Subdivision, T. 4 S., R. 12 E., M.

Chains	
1.15	Flash drains E.
11.20	" " "
27.65	Rain drains S. follows E. B.
35.65	Reach bank N. B.
40.00	Set Comp. ¼ sec. cor.
79.26	Intersect N. boundary of Town- ship 3 S. R. 12 E. M. for com. of 2 secs. 1 & 2
	Commence South on true line
	Set sec. cor.
39.26	Set Limestone 16×10×5 ins. 10 ins. above ground, marked ¼ on N. side & raised mound of stone for ¼ sec. cor.
79.26	The cor. to secs. 1. 2. 11 & 12 — Land broken rocky Soil Dark — Timber Cedar & Pine Marked 4 1877 T. C. Bailey

Chains	
Chain	
40.00	
79.26	
79.26	

Chains	Notes of the survey of J. W. Burrill
	Boundaries of 34 & 35 on the
	West Boundary of Township
	North of E. cor. 34 & 35
	Nov. 15. 80. E.
10.00	Road from N. E. 9 S. 20.
40.00	Log Dwelling 16 x 11 x 10 in. 11 in.
	Log stable and outbuildings and
	one acre fenced for ½ acre cor.
49.00	Meander lines N. &
80.00	E. & W. lines on 16 x 10 x 8 in. stone
	mound 20 on E. & 10 on S. sides from cor. to
	acc. 26. 27. 34 & 35.
	Land broken rocky
	Soil, Dale.
	Timber, Cedar & Pine.

East on random line

Soil. acc. 26 & 35

	Antal Linier och Tillbehör.	Ant.
Chains	1 Mätkedja.	Chains
80.00	Spiralstänger.	
140.00	2 Libeller.	50.00
2.00	Handspaksnycklar.	64.00
80.10	Jalonger.	80.00
	25 26 35+36	
	Bussolstativ.	
	Stativ.	
	Lätt.	
40.05	Lätt. Signaler.	
	Ledstänger.	
	Signalkäppar.	
80.10	Signalstänger.	
	Landmätarstänger.	
	Timmerstänger.	
		24.00
	Summa.	40.00
	Tab. 5.	79.90
18.00	Stativ.	
40.00	Lätt. Signaler.	

Det store Kartotek Mappe 193

Chains measured Comp. Variation
ground to surface acc. cor.

55.00 Chains N. & S.

64.00 " " E.

80.00 Old Pines Line 16 × 8 × Chains 11 Links
Reference Schedule 80 S. edge Raised
ground to Chains for acc. Dec. 22.23.26
Y27-
Land Polling, Sheet 2 Data
Timber Cedar 18 Pines

Eastern Random Lines
Sec. Acc. 23 & 26.
Var. 15° 30' E.

21.00 Chains N. & S.

40.00 Left Bank for acc. cor.

79.90 Intersect N. & S. Chains Poles S. of
23.24.25.26
cor. Dec. ~~[illegible]~~ from which
S. 8° E. 53 M. on Bear Pines

Lübeck den 1. April 20.

Rain. Lübeck 2 Bl. 2 C

1 Lot Dänenbohnen 16×10×5 zinnerne Dänen-Bohnen-Maaß-Gefäße

BOOK-A-153

Sept. Monthly Accounts 1905

Chains [illegible] Main Drain S. to S.E.

[illegible] Main Drain S. 2 3. W. 1.

[illegible] Main Drain S. 3. W. 3 1/4

[illegible] S. 2 3/4 W. 3.

1 1/2 W. S.

Land Drainage Act, 1st Dists.

Finance Account Cash

Cash on Pavilion Account

Bal. as per Ac. 1903

Rec'd 30. 8.

Received

10.00 Chains drains N.E.

20.00 " " "

40.00 Sch. Comp. Trees &c.

80.00 Interest Cash & Bank Accts. for year
13-14-23-24

Trees, Shrubs, Perennials

Herbaceous Plants

Bal. as per Ac. 1903

1896

Diverse	
40.00	Hr. Tømrermester [illegible]
	[illegible]
	[illegible]
	[illegible]
	[illegible]
	[illegible]
	[illegible]
70.00	[illegible]
	[illegible]
	[illegible]
	[illegible]
	[illegible]

	[illegible]
	[illegible]
12.00	[illegible]
25.00	[illegible]
40.00	[illegible]
	[illegible]
	[illegible]
	[illegible]

Diverse
80.
10.
20.
25.

DUUR-A-153

Chaux

80.00 [illegible]

[illegible]

[illegible]

[

1908

1908		
10.00	[illegible]	Chas
5.00	[illegible]	
50.00	[illegible]	40.
	11.12.13 & 14	
	[illegible]	
	[illegible]	
	[illegible]	
	[illegible]	
10.00	[illegible]	80.
	[illegible]	
	[illegible]	
	[illegible]	
	[illegible]	
	[illegible]	
	[illegible]	
	[illegible]	
	[illegible]	
	[illegible]	
	[illegible]	
	[illegible]	
50.00	[illegible]	
	[illegible]	
	[illegible]	40.
		80.

BCUA-A-153

Auskjøbsakter Aarhuus Amt 1899

Thaim | Auskjøbsprot. 1894
Ctr. 15. Fol.

110.00 Selv. Thaim Bedøm. Taxt
for 1 Stk. Stald med Loft
for 2 Stk. Heste Stald med
Fjæl og Halmrum paa 4 × 12 × 12
Alen for Fæ. Cor.

80.00 1 Stk. Redskabsskur 25 × 8 × 3 Alen
med Lem paa Gavlen 8 × 3 Alen S.
paa 2 Sider med Fjæl og
Halmrum paa 4 × 12 × 12 Alen for
Fæ. Cor. Skuur, S. 3. 1894
Landbrugs Forsikrings
Selskabet Danmark 80 Kr.

Brandforsikringsbrev
Udgjort d. 3/7 11
Ctr. 15. Fol. 2.

40.00 Kr. 40 Tem. Fjæl Skur Cor.

80.00 Inventar Ass. Kr. 80 Alen 35 Øre K.

	1.2.14.12	
	[illegible]	
	[illegible]	
	[illegible]	40.00
40.25	[illegible]	
	[illegible]	
	[illegible]	
	[illegible]	
	[illegible]	80.00
80.50	[illegible]	
	[illegible]	
	[illegible]	

	[illegible]	
	[illegible]	
	[illegible]	
40.00	[illegible]	
80.00	[illegible]	
	[illegible]	30.00
	[illegible]	40.00

DOOR-A-155

Sheffield Assembly 201

2 Chairs S.C. 21 Montpellier
Feb. Dec 1, 203

40.00 Pol. Edward Edward B
Edwards Winter Pinnacled
in S. with Heidelberg and Grand
Gothic front Pinnacles 4 x 2 x 11
Sawfor 4 years.

80.00 Rec'd Dec. 2, 3, 1811
Rudd Lewis Sold, 1st Feb
Pd Chimbr =
Mar 5th 1811 J. M. Burnside

Mar 5th 1811 Pd by T. & Bailey
Mantelpiece on Dec 1, 33 x 34
Imperial Wainscot Chimneypiece
Portico etc. Dec 1, 33 x 34
Val. £30.2.

30.00 Gothic Chairs S.C.

40.00 Pol. Pinnacles 24 x 7 x 6 inch 0

26.27 34 + 35

Chains S. 89 E. 5.00 ~~2.73~~ 34 from which
S. 39 E. 5.30 m. Chains
N.E. cor. 2.73.34

3.93 Std. Iron stone, 16 x 10 x 10 ins
Replaced by ch. & oak & Raised mound of stones for 3 cors.

7.86 Iron cor. Brass. 2.28.33 & 34
Land rolling. Hill 3 Chains
Chains. Level Chains

North W.C. cor. 2.28
Iron B.34.2.

36.00 Various Chains N.W.
40.00 Std. Iron stone 20 x 11 x 8 ins 15 ins
Replaced by m. oak & mound of stones pr. by occ.
8.00 Std. Iron stone 18 x 9 x 6 ins 12 ins.
Replaced by 3 oak & 2 ins. edges

	Prodaja Vas. Ant. Ant. Ivan.	Ost.
Ostaju	Na novi račun prenesene	79.94
	[illegible]	
	Zemljišna knjiga	
	Veliki Bukovec	
	Za Gospodarsko	
	Ant. [illegible]	32.00
	Ant. [illegible]	40.00
58.00	Gradski ured A. Z.	
40.00	Ondrej Ivan A. Z. [illegible]	
	[illegible]	
54.00	Gradski ured A. Z.	54.00
79.94	Ivan Ant. Stanić [illegible]	80.00
	[illegible]	
	[illegible]	
	Ant. [illegible]	
3.94	Poljodjelsko [illegible]	
	[illegible]	
	[illegible]	

Amsterdam

Omans	
79.50	Stempelbos 21.22.2/1938
	Landgoederij Oud Zuilen Zuid-
	Oost- Oudaanplein

Stork Hil. 2000 21933
Nr. 10. 30. E.

32.00	Gudelaan N.Z.
40.00	Hil. Timmerlaan 20 x 9 x 7 cm. 15
	cm. dekmarkeel Kantmaten
	maten opmaatafslag voor 4
	zoden.
54.00	Waalwijkerlaan N.Z.
80.00	Hil. Kanaaldeel Oost 18 x 8 x 4
	x 4 cm. 12 cm. dekmarkeel 30 x 80
	Zuider Waalwijkerlaan afrit
	Provincialeweg 4 x 12 x 4 cm. for
	Prov. Waterstaat 15 Mei 1932 e.
	Landgoederij Oud Zuilen Zuid-
	Oost- Oudaanplein

Subdivisions Sec. 2, T. 32 N., R. 2 W.

Chains	Westmoreland Coal Co.	Chains
	Lot 1, Sec. 2, T. 32 N., R. 2 W.	
	40.38 Acres.	
3.00	Rocky Ridge Drain Dist.,	
	Lot 1, Sec. 2, T. 32 N., R. 2 W.	
5.50	Rainwater drain No.	40.00
6.50	" " "	
7.00	Ridge Drain No. 3,	
8.00	Interstate Highway No. 64 from	
	14 15 22 + 23	
	Sec. 2, T. 32 N., R. 2 W.	
	Westmoreland Coal Co.	80.00
	Lot 2, Sec. 2, T. 32 N., R. 2 W.	
10.00	Pole Canal No. 11 x 10 x 8 Drain Dist.	
	Deepwater Levee and Drainage	
	Commissioners for Levee from	
	Mississippi River to North	
	72 Mile Post on Rock Island S. W. R.	
80.00	Westmoreland Coal Co. Lot 3, Sec. 2, T. 32 N., R. 2 W.	
	Small pulling Road from	

BOOK-A-153

Chains | Price & Date

Chains Cedar Posts

Sept 10. 1915

Rec'd 30 C.

40.00 to C Chain Cedar Posts 5½ x 8 x 10 x 12 in. 12 in. deep marked Js S. with Rail Road mound & each post to have 10 x 12 x 12 in. deep hole.

80.00 do C Extension 2 x 18 x 24 in. 16 ins. deep marked 3 in 8 sides S. edge Rail Road mound & holes for cross bars. 9.10.15 7/16

Some Cedar

1 Cedar Bar dis. Mars S. 77 W. 36 lks. dist. marked S. 157 M 2 S. 82 W. B. T.

1 Cedar Bar dis. Mars N. 10 W.

	Balance brought down	
	Received from Cash	
	Received from Sales of Produce	
	Balance carried down	40.00
	Rec'd. Rees. 10 7 15	
	Van 5. 30. E.	
100.00	Received from Cash	72.10
80.00	Interest C.A.P.S. Limited on a/c	34.25
	Rees. 10 7 15 from Nicholls	80.00
	Received from	
	Rec'd. Rees. 10 7 15	
40.00	Received from Sales of Livestock	
	produced from Fordson	
	Rec'd. Rees. on from which	
	Received from Mr. Rees S. 15. 7. 50	
	Received from C.A.P.S.	
80.00	Received Rees 9. 10. 15 7 16	
	Received from Land Commissioner Bailsdale	

Chains from Geo. P. Smith's Bedar Point

South 1/4 Sec. 9 T. 10
Va. 15° 30' E.

40.00 Set Sandstone 12×10×6 in. 8 in. above
marked Iron Mtn. Mound
Quartz from pit 4 ft. N. 24×12×12 in. buried
72.10 Iron Ridge Brass Bd.
14.25 Fork chains S. E.
80.00 Set Sandstone 16×15×3 in. 11 in.
buried notched 3 on E. 3 on S. edges Mound
Ground Stone for Sec. Cor. 3.4.9.10
Pound Rock
N. Cedar 12 in. dia. Brass A. L. C. 40 lks.
dist. marked S. 3 in 2. S. 82. 2 W. B. T.
N. Cedar 9 in. dia. Brass A. 15 W. 15
lks. dist. marked S. 4 in B. T.
Land rolling. Soil Sandy
Timber Cedar & Pine

Said Lake Meander

Chains — Northern and Eastern lines
N.E. sec. 3 T. 21
Ran N. 15° W. 30.2 ch.

4.00 — N.E. Comp. Mound

80.00 — Intersect Church Boundary of
Commanche Village No. of sec. 3 sec. 34 T.
from which
S.E. 30. N. on Town line
N.E. cor. sec. 34 T.

40.04 — N.E. Standard Mound 4 x 10 x 4 in. Pits
dug & marked W. Oak & Walnut
mound & Stake Bears N. pits 2 ch.
24 x 12 x 12 in. for sec. cor.

80.04 — Reach Section line N. 89° E.
Set Stake & Stones
Mar 5th 1877 T. C. Bailey

Subdivision 24 S. R. 2 W. Salt

Chains		Chains
	Traverse 1877 by J. G. Lewis	
	From the cor. to sec. 3 & 33	40.00
	on the south boundary, N 89° W	40.50
	this Dam	80.06
	North 80 rds. 33 & 34	
	Lat. S. 3 E. 2.	
28.00	Take a stone marked A;	
40.00	Set Sandstone 8 inches sq. 20	40.03
	inches in the ground, mark'd with cross	
	drain & mound stones for 4 rods	
80.00	Set Sandstone 20 x 9 x 5 inches	80.06
	in the ground, notched on S.	
	edge, drained mound stone	
	for cor. to secs. 28, 29, 32 & 33	
	Land rolling & rocky -	
	Pair & Dale Timber, Cedar 25 inches	
		25.00
	East on random line	40.00
	for sec. 28 & 33	

Salt Lake Meridian

Chains	
	Twp 1 S. 30 E.
40.00	Set Temp. Inscription
40.50	Chains Drains N. W.
80.06	Intersect N 1/4 S. line and Chs cor.
	Bears 28 & 33 from which
	Pine 8 ins diam bears
	NE Bears 28 & 33
40.03	Set Limestone 18 x 10 x 6 ins 2 ins.
	deep marked from which bears
	mound of stone for 1/4 sec cor.
80.06	The cor. Bears 28. 29. 32 & 33.
	Land rolling & rocky
	Soil Gravelly Timber Cedar & Pine

North Bdy. Sec 2. 28 & 29

Twp 1 S. 30 E.

25.00	Wash Drains N. W.
40.00	Set Limestone 16 x 9 x 3 ins 11 ins.
	deep marked 2 on N side Mound

Chains

Chains | Record of Stones for Sec. Cor. | 40.04
57.00 | Bearings & Chains to N. W.
8.00 | Set Stone Sec. 2nd x 18 inch
18 Boulders in stake and mound 8 | 0.08
Cor. Ridge Trail and mound
Stone for Cor. Sec. 2 0 2 1 2 8 2 9
Land undulating Soil Dale
Woodruff Timber Cedar Pine

East on random line
Lt. Sec. 2 1 2 8 | 40.00
Var. 15° 30' E. | 38.00
10.00 Stake 1 N. W.
40.00 Set Corner Sec. Cor. | 40.00
80.00 Intersect N. & S. line 35
W. S. Sec. Cor. 2 1 2 8
Commences | 0.00
S. 89° W. 35 links on base line
Lt. Sec. 2 1 2 8

Sixth Standard Meridian

Chains
40.04 Set Limestone 18x14x10in. 12 in. deep marked ¼ on N. side raised mound of stone for ¼ section.

80.08 Trees. Pine 3, 24, 21, 28, 29
Land, Rolling, Soil, Gravelly
Timber, Cedar, Pine.

North

Oct. Dec. 20 & 21
Jan. 15. 30. 2.

14.00 Gl. Pine drains N. W.

38.00 Rear timber tree Pine 36 inches, Stake, Brass N. E. 1.5. M.

40.00 Set Limestone 18x9x9in. 12 in. deep marked ¼ mound N. side raised mound of stone for ¼ section.

80.00 Set Charred Cedar Post 6x6x4 ft. 12 in. deep Mixed mound of earth from pit 1 rod 24 x 22 x 12 in. X

Subdivision Plan S.W. 2. 7.

Chains

~~Principal Meridian to Base Line~~

~~Base Line to Township~~

~~Township~~ Boundaries,

Bedar Judicial Grant S. 6 S. E.

Boundaries of Grants S. 21. 7.

S. E. Section 6.

Road Reserved, Land Sold Part 80.00

Section Line Bedar Grant S. Grant

Post on Random Line

N. E. Sec. 1. 16 R. 21

Var. 15° 30. E.

15.00 Bridge Swamp Branch Grant S. 21. 7. 40.00

3.00 Marsh, Grant S.

10.00 Post, temp. in Sec. Cor.

6.30 Marsh, Grant S.

8.00 Intersect N. B. S. Line at

Cor. Sec. 1. 16 R. 21 Township

Sold at Public Auction

Chains Hyde and Bruce Lines
Bet. Secs. 16 & 21
40.00 Pat. to Thomas Cox, Jr. Sandpoint
Idaho for Lots one, four and five
of Section Eighteen in Town
Forty North of Range One
West of the Boise Meridian
containing One Hundred
and Seventy and 50/100 Acres
80.00 Thos. Cox, Secs. 16 & 21, T. 20 N. R. 2 W.
Sandpoint Addition, Block 2 Lots
Thirteen & Fourteen

North & East Secs. 16 & 21
T. 57 N. R. 3 W.
40.00 Pat. to Edward Cedar Post 40 x 4
x 4 in. Spindle marked 1/4 S. on
W. side Main diagonals Quarter
Post Spike 24 x 12 x 1 in. for 1/4 Sec. Cor.
Common to
Sections Eleven & Twelve T. 57 N. R. 3 W.

Subdivision of T. 42 S. R. 2 W.

Coleins	25 Acres S.E. quarter of S.W. quarter	Coleins
$80.00	Sec. 9 T. 42 S. R. 2 W. Beginning at the S.E. corner of said quarter quarter Section and running thence West 20 chains to a stake from which a Black Oak 6 inches diameter bears North 25 links distant and a Black Oak 6 inches diameter bears South 50 links distant thence North 12½ chains to a stake from which a Black Oak 6 inches diameter bears South 25 links distant thence East 20 chains to a stake from which a Black Oak 6 inches diameter bears South 50 links distant thence South 12½ chains to the place of beginning containing 25 acres more or less according to the U.S. survey thereof approved by the Surveyor General on the 10th day of March 1871	$40.00
	Patented to Samuel Bacon	
	Patent dated April 1st 1872	
	Recorded in Book No 1 of Patents page 242	
	Land Office at Visalia	
	Entered April 1st 1872	

Easton Pandora Line,
Act. Dec. 9th 1876

Mar. 30th

Lee, Co.	Sec. Comp. Contract	40.00
$40.00	Transfer to Santa Cruz	
	Rail Road Co.	
	Sept. 6th 1875.	
Coleins	Entered April 5th	54.00
$80.00		

BOOK-A-153

6th Principal Meridian

Chains | cor. to secs. 9 & 16 T. 9 N. R. 8 W. 6th P.M.
Brass cap dr. e. & w.
Ash, secs. 9 & 16
40.00 Pits & mounds 16 x 16 x 4 in. 11 lks.
dist. from cor. to side of road
mound of earth & stone pits each 24
x 12 x 12 in. for lines cor. from which
Cedar 6 in. dia. brs. South 65
lks. dist. mounded 1/4 S. & S. T.
80.00 Stone cor. secs. 8 & 9 T. 9 N. R. 8 W. 6th P.M.
Landscape dating, pits & 3 x 3 x 3 stone
Trimble - Cedar 6 in. dia. brs.

North, lks. secs. 8 & 9
Ch. 50 L. & E.
40.00 Depot, small rock in mound
of earth & stone pits each 24 x 12 x 12 in. for
1/4 secs.
54.00 Road, brs. N.E. Var. N.

Claims		
8.00	Pet Chard for Indian Medicines	Claim
	examining sufferers head &	40.00
	25 and Sold Dressed wounds	
	of Earth from Breach & assisting	
	surgeon Dawson at 5 Sep	
	Landlord Paid Rates	80.00
	As Owner	
	Total amount Claim	
	Ex. Sec. 4 Sep	
	Ex. 15. 30.8.	
10.00	Road Guard A. E. 25.9.	
40.00	Volunteer Inspection	15.00
62.70	Washerwoman A. E.	40.00
64.60	" (same) " A. E.	45.50
67.00	" (") " S. E.	80.08
80.00	Interest Assistant Surgeon	
	on Bond 2 days from which	
	Bond was due	

BOOK-A-153

Partly Low Water Meridian

Claim

10.00 Old Standard Boundary Line
running Northerly & Westerly on
N. side Main road from
upper end Section 30 to
Section

80.00 The East Half
Land Claim Act
No Number

North on random line
to Section
Tp. 5. 30. E.

15.00 Fork Claim D. E.

40.00 Old Template Line

45.50 Road Claim

80.08 Intersect north boundary
of Township 5 on East
Section 25 from which
S. 1° W. 80 links

Chains

Chains

15.00

80.00

30.00

40.00

39.00

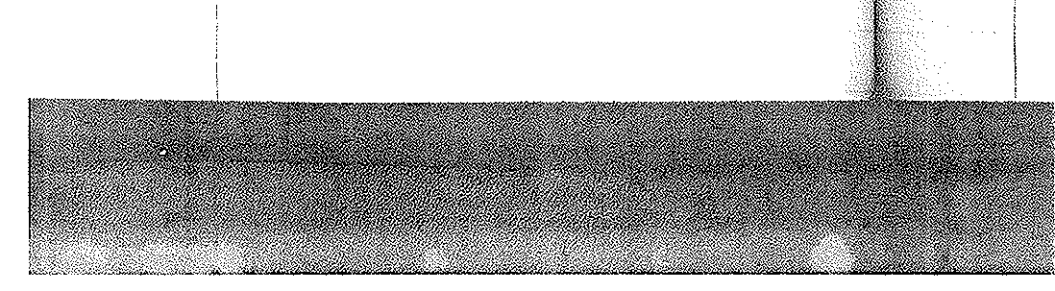

Sixth Standard Meridian

Chains	
	North 15 links to the Quarter Section Corner on the South boundary of Section 15.
15.00	Thence East 15 chs to the South Quarter Corner of Section 15.
	Set a Stone 16 x 10 x 4 ins. 10 ins. in the ground, marked S 15 1/4 on E & 1/4 on W sides, W. C. Raised a mound of stones for mile cor. Secs. 15, 16, 21 & 22 from which
	A Pine 30 ins. dia. bears S. 75 W. 8 links distant marked W. C. S. 21. 7 + 2. B. B. 22 ins. B. T.
30.00	An old Railroad drain N. W.
40.00	Set a Stone 16 x 10 x 5 ins. 11 ins. in the ground marked 1/4 on W side, Raised mound of stones for 1/4 sec. cor. from which A 6 ins. dia. Pine bears S. 45 E. 75 links distant marked B. T. S. C.
80.00	Set a Stone 8 x 10 x 4 ins. 12 ins. in the ground notched 1/4 on W and S. edges for sec. cor.

1 Stück	5 p. 30. 8/10 Bauwiesen	79.90
	Abschlag wie Bauwiesen	
	10 Stück Bauwiesen S. 221	
	L. 2, 8 Bl. 2, 11. 2.	
	Landwirthschaftliches Gut	
	Hinter-Schauenstein	
	Ein Compendium Heim	60.00
	Lit. Acc. 2 / 1833	60.00
	Par. 15. 30. B.	75.00
10.00	Ein Kompendium Accession	80.00
16.00	Stück Heimstein A. M.	
79.90	Interessent A. V. Simmler	
	S. Inventar 2 / 1832 pro Mehrheit	
	S. 8 / 53. Mehrheit Heim	
	Lit. Acc. 2 / 1832	40.00
1.95	Ein Schmalzbuch 16×10×4 in 11	
	Inventar pro Mehrheit pro Mehrheit	
	Inventar und Schmalzbuch Acc.	

Third Principal Meridian

Johnson

1930 Twp. 2 Rge. 29-30-31 W 3

Land granulating Phil Bale

Thinks Bedard Paine

Red on random line

Sec. 2, 30 W 31

Sec. 35, 30, 8.

40.00 Det. Camp. Sec. cor.

60.00 Outlines Meanders Bounds N.E.S.W.

7.50 Seam & Vacant

80.00 Intersect Quarter Boundary Section

Township Line Rge 30 W 31

Pointed

Set Iron Bolt Line

Sec. 2, 30 W 31

40.00 Set Stone 20 x 14 x 6 in. 15

in ground marked Sp mound

Raised mound Stones Pits

Cedar - from which

Salt Lake Meridian

Chains in cor. to secs. 19, 20, 29 & 30

Landscribing. Soil. Timber

Timber — Cedar & Pine

East on random lines
to secs. 20 & 29
Var. 15° E.

40.00 Pile stone for cor.

42.00 Pine & Cedar N. E.

79.94 Intersect W. S. line 35 lks. S. of
cor. to secs. 20 & 29 from which
S. 89° 45' W. on true line
to sec. cor. 20 & 29

89.97 Pile & Dimensions 18 x 10 x 5 ins. 10 ins
scribed N. on N. side & mound
mound of stone for sec. cor.

79.94 Set cor. to secs. 19, 20, 29 & 30
Landscribing. Rocky. Soil. Timber
Timber — Cedar & Pine —

Subdivision, Sec. 2, S. 12, R. 2 W.

Chain Field commanded due
Sec. 2 - 39.30
Var. 15° 30'

	Chains		
10.00	Planted in pencil post,	40.00	
10.00	Set temporary corner,		
35.00	Cross fence N. & S.		
39.76	Intersect east boundary of		
	Township 16 So. R. 3 West.		
	39.30 from witness	50.00	
	S 89° 53' E. on true line	73.00	
	Sec. 2 - 39.30	80.00	
39.76	Set stone 15 x 10 x 8 ins.		
	in. deep mounded		
	raised mound of earth from		
	pits each 24 x 12 x 8 ins. for		
39.76	Set corner Sec. 1, 2, 11, 12.		
	Land meanders by Creek		
	Timber, cottonwood.		

BOOK-A-195

Salt Lake Meridian

Chains	
	North, 31 chs., 1920
	Co. S. B. & L.
12.00	Beam timber stake, set, bears N. 45 W.
40.00	
40.00	Set Stone 20 x 10 x 6 ins. deep
	marked, mound, Wide Mine bears
	S. planks per Co. contract dated
	1st Sec. and Mon. dia. bears North
	230 lbs. dist. marked 4 S. B. & L.
50.00	Ridge, bears S. W. cedar timber —
93.00	Beam timber, cedar, stake bears S. W.
80.00	Set, Stone, mound, Sec. and Quar. Cor.
	12 ins. deep, mine, mound, Scarth
	forms, pits, each 24 x 24 x 12 ins. per Co. Co.
	Dec. 17, 18, 1920 —
	Rand, rolling — Soil, Scarth —
	Timber — Cedar & Pine —

Easterly and Mine

Dec. 20, 1920

Chains	Dr. ao. 30.	Chains
15.00	Date Cash Book Fo. 1.	
37.00	Ledger Fo. 2.	
1.00	Balance in pocket.	
5.00	Account Book Fo. 15.	
10.00	Interest A/c Chains 35.00	40.00
	A/c for Dec. 1920 forwarded	8.00
	A/c for Chains Cedar	76.00
	Dec. 31. 1920	78.90
100.00	Fol. Chains Cedar Cost A/c	
	4 x 4 x 12 in. deep marked A.S.	
	on N. side Main & marked Chains	
	from pit 4 yards x 4 x 12 in. for A/c	
	Dec. 31. 1920 forwarded	38.90
	1 Box Axe Heads Book No. 1	
	40 Wedges marked A.S. R.I.	
50.00	Rec. Dec. 31. 1920	
	Land Revaluation	78.90
	Fol. No. 2 Date	Timber, Cedar

N. Salt Lake Meridian

Chains | Pines and middle point

West on random line
Ab. 1889, 1917
Var. 15° 30' E.

40.00 Set temp. 4 acc. cor.
8.00 Pass Ind. N. E. 15, 17,
76.00 Ind. trail N.
78.90 Intersect west boundary of Township 35 N. of 1889
from which
N. 54° 45' E. one tree brs.
Ab. acc. 1889
38.90 Set Standard cedar post 4 x 4 x 4 in.
12 in. deep marked 1/4 S. on N. side &
raised mound of earth from pits
each 24 x 12 x 12 in. for 1/4 acc. cor.
78.90 Thence Acc. 17.18.1920.
Land generally level - soil rich

Cedar

Section 232 Sec. 2. S. 11. R. 2. W.

Chains No Timber

North, Feb. 1918

Sec. 13. T. 3. S.

25.50 Road, Sec. 13. S. E. 9 ft. W. 54.50

40.00 Set Charred Cedar Post 4 x 4 x 48 in. 12 in. deep marked 13 S. 40.00
W. side raised mound of earth from 4 pits each 24 x 12 x 12 in. for cor.

70.00 Set Charred Cedar Post 4 x 4 x 48 in. 12 in. deep notched 3 sides 70.00
3 on S. edges raised mound of earth from 4 pits each 24 x 12 x 12 in. for cor. Sec. 7. S. 1785.

Land nearly level, soil fair

No Timber

80.00

Salt Lake Meridian

Chains On standard lines
Pt. sec. 8 T 1 S
Rge. 30 E.
80.00 Retained in sec. cor.
54.50 Road, bears N. E. 9 L. N.
[illegible]0.00 Intersect N. S. line of sec.
45.00 15 secs. 8 T 1 S from which
Pt. on true line
Pt. sec. 8 T 1 S
[illegible]0.00 Set Stone Mound Pos. 15 x 15 x 4
mk. 2 in. deep mounded 4 ft. on N.
side raised mound of earth
from pit, pack 4 x 8 x 18 in. pit, sec. cor.
from which
Hackberry bears N. 30 W.
266 lks. dist. marked 4 x 4 x 8 T.
80.00 The cor. secs. 5, 6, 7, 8 T 1 S
Rge 30 E
Land mostly level. Soil Gravelly
No Timber.

Subdivision of Lot 2, S. 17, T. 7 N., Ra

BUUR-A-153 .78.5

Deeds Lake Meredian

[illegible] 5.00 [illegible] Sheppard, Bedard & Co. [illegible]
[illegible] with [illegible] and [illegible]
[illegible] and [illegible] [illegible]
[illegible] for [illegible]

[illegible] 80.00 [illegible] Blanchard, Bedard & Co. [illegible]
[illegible] [illegible] [illegible]
[illegible] [illegible] [illegible]
[illegible] for [illegible]

[illegible] Land Office [illegible]
[illegible] [illegible]

[illegible] [illegible]
[illegible]

[illegible] 10.00 [illegible]
[illegible] 5.00 [illegible]
[illegible]
[illegible]
[illegible]

Chains		Chains
40.00	Plat of the subdivision of the S.E. 1/4 of Sec. 10 T. 2 N. R. 2 W. of the Indian Meridian, Oklahoma Territory, as surveyed, platted and subdivided by me in accordance with the Act of Congress approved May 29th, 1908.	37.30
80.00	The corners found and established as described in the Field Notes of this survey.	37.30
	Land level and fertile.	
	Soil, Sandy.	
	No Timber.	
	Bearings on random line.	
	Variation 6° E.	
	Jan. 15, 1906.	
8.00	Road East and West.	8.75
40.00	Set stone for corner.	40.00
77.30	Intersect Quarter Boundary	77.00
	Township Boundary	80.10
	687 from which	
	S. 89° 51' E. on true line	

P. Salt Lake Meridian

chains	Mile sec. 6 & 7
37.30	Set Planed Cedar Post 4x4 x 4 ft.
	in mound of earth from which a
	pine bears N. 12 W. dist 4 links
	and a mound of earth from which
	an Ash 24 ins in dia bears N. 6 W. dist 4 links
37.30	The cor. to secs. 5. 6. 7 & 8
	Lands level.
	Soil Dale
	Timber a few Cedars

	North on random line
	Mile sec. 5 & 6
	Va. 15° 30' E.
3.75	Road bears N.E. & S.W.
40.00	Set temp. for sec. cor.
47.00	Old Road bears N.E. & S.W.
80.10	Intersect north boundary of
	Township 10 S. R 6 W. of Salt Lake & sec. cor. 5 & 6 from which

728

Subdivisions Surveyed T. 2 N., R. 2 W.

Chain | S. P. 2 I. Pt. on boundaries
Lat. acres. 5 & 6

40.10 Pts. Boundaries 19 & 20 S. 3 W. 11 in
descriptive from N. side Primary
mound of Cypress for 1/4 sec. cor.

80.10 Timber Lands Sec. 5 & 6. 1878
Land, land. Soil, Rate -
Timber a few Cedars -
Mar 6th 1879 T. Or Bailey

General Description

The lands in this township embrace the timbered plateau on the S. slope of the Backbone Mountains, a portion of Kimball (Valley) & the small Valley of "House Rock".

The lands are agricultural

T. Or Bailey
U. S. Dep. Surveyor

BOOK-A-153

739

U. S. SURVEYOR GENERAL'S OFFICE,

Salt Lake City, Utah, June 21st 187 7

The foregoing field notes of the survey of the S. E. & N. Boundaries & Subdivisions

Township No. 42 S. Range No. 2 W.

Executed by Bailey & Bissell

Under Joint contract of the 4th

day of September 187 6, in the month of

March 187 7, having been critically examined, the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

Nathan Kimball

Surveyor General for Utah.

242

240-241 Blank

− 12.35	+ .74	639.04
− 19.66	118	625.00
− 18.22	16	632.80
− 6.20	2.62	626.18
− .96	4.74	627.65
52.39	7.62	
7.62		
44.77		
4.77		
6.29		
50.01		

2300.00
30.91
$2269.09

6982.93
16
2298.95

12.39
3.02
3.02
58.43
1.38
57.05

72
48
15
135

410
10
30
10
4
2
6
40
10
758

741
10
14
5
10
6
2.76
2.20
1.10
.24
7.44
1.88
5.56

2040.
22 52.95

4600.00
5.56
5974.12

BOOK-A-153 8

9c Examined by C. H. Cramwell. C.C.

Field Notes
of the
Survey of the
West, East & North
Boundaries
of
Township 4½ South
Range 3 West
of the
Salt Lake Meridian
Utah Territory
by
J. C. Burnie
under your contract of
Bailey & Burnie
No 3 dated Sept. 4th 1876.

Surveyed Nov. 26th & 27th 1877.

C.C.

BOOK-A-153

Township 42 South R. 3. West

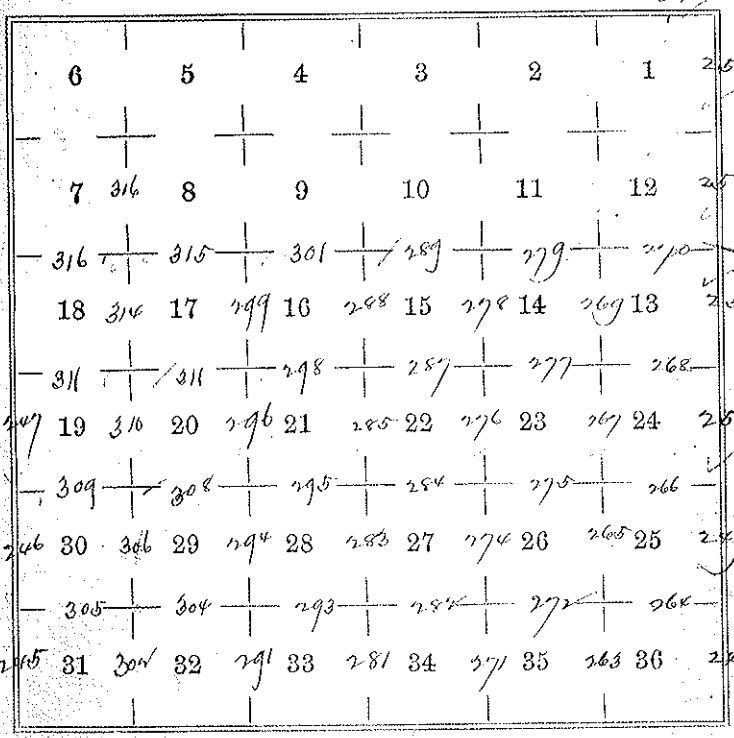

(Visit boundary T. 42 S. R 3 W. 245
Salt Lake Meridian

Chains

Rear. 26th 1877 by D. G. Burrill

Found the established
cor to T. 41 & 42 S. R. 3 & 4
W. 2 mile
North between secs 31 & 36
Var. 15° 30' E.

4.50 Second gully

1/0.00 Set sandstone 18 x 10 x 6 in.
13 in deep marked 1/4 on N.
side & mound of earth
from 4 pits each 24 x 12 x 12 in
for 1/4 sec. cor.

42.15 Road bears E & W.

57.00 Low ridge bears E & W.

80.00 Set sandstone 18 x 11 x 3 in 13
in. deep notched 1 S & 5 N. and
raised mound of earth from
4 pits each 24 x 12 x 12 in

West boundary of T. 44 S. R. 3 W.

246

Chains

Chains | for cor to secs 25 30 31 & 36 | 80.00

Land level

Soil 1st rate

Timber scattering Cedar

North between secs 25 & 30

Var 15° 30' E

13.10 | Cedar 16 in. mound and land telegraph Stat bears N.E & S.W.

40.00 | Set sandstone 18 x 11 x 10 in., 13 in. deep marked 1/4 on W side, with mound of stone for 4 sec. pour white Cedar 12 in. dia bears N.E 65 lks dist marked 1/4 S. B. T. | 40.00

45.00 | Wash drains S.W.

49.00 | Ridge bears N.E & S.W.

54.50 | Wash drains N.W.

60.50 | N.W. point of ridge

Salt Lake Meridian

BOOK-A-153

249

Chains
80.00

Set sandstone 20 x 12 x 5 in. 15 in. deep marked T N & S R, with mound of stone for cor. to sec 19, 24, 25 & 30.
Land mostly broken
Soil and Stone
Timber Cedar.

North between Secs 19 & 24
Var. 16° E.

40.00

Set sandstone 20 x 10 x 5 in 15 in. deep marked ¼ on W. side, with mound of stone for ¼ sec. cor at foot of bluffs bears E & W.
Land broken
Soil and Stone
Timber Cedar.
Note, Abandons line here
Feby. 26th 1877 J. G. Reynolds

Book 3 Boundary of T 42 S R 3 W

348

Chain

Feby. 27th 1877 by J. S. Barnes
Surveyor to T. 42 S.
R. 3 W. 2 4 3 W. 2 mile
North between secs. 31 & 36
Var. 15° 30' E.

2.00 Gulch Iron N. E.
40.00 Set limestone 15 x 10 x 5 ins
10 ins. deep marked 1/4 on N. side
with mound of stone for 1/4 sec. cor.
58.00 Buckskin gulch bears S. E.
80.00 limestone 20 x 15 x 4 ins 15 ins.
deep notches 5 N & 1 E. with
mound of stone for cor to secs.
25. 30. 31 & 36 on E slope
of ridge
Land broken
Soil 2nd rate
Timber scrub & piñon

Chain

40.00

80.00

40 Chains	North between secs 29, 30 Var. 15° 30' E. Along Section & slope
46.00	Set Sandstone 14 x 10 x 5 in 9 in deep marked 29 30 W with mound of stone for 1/4 sec. cor.
80.00	Set Sandstone 20 x 15 x 4 in 15 in deep marked 1/4 N. & 1/4 S. with mound of stone for cor. to secs 19, 24, 25 & 30 from which A cedar 12 in dia bears N. 70 E 56 lks dist marked S 19 T 12 S. R 2 W. B.T.
	A cedar 12 in dia bears N. 45 W. 90 lks dist marked S 24 B.T.
	Runs S. slope of ridge
	Soil 2nd rate
	Timber cedar.

Exhibit Boundary of T. 42 S. R. 30 E.

Chains

North between secs. 19 & 24.
Var. 15° 30' E.

40.00 Ridge runs N.E. & S.W.

36.00 Lava bluffs & outcrop S.E.
bears E & W.

45.00 Set Sandstone 2 in x 10 x 4 in 15 lks
deep marked 19 on W. side 40.00
with mound of stone for ¼ sec.

44.00 Wash bears S.E.

67.70 Road bears N.E & S.W.

80.00 Set Sandstone 2 ft x 12 x 3 in 18 lks
deep notched 3 N & S, with 80.00
mound of stone for cor. to secs.
13, 18, 19 & 24 from which
a cedar 12 in dia bears S 10 E
45 lks dist marked B/T T.42 S. R.31 W. B.T.
a Cedar 8 in. dia bears N 10 W.
100 lks dist marked B/T
T 42 S R 31 W. B.T.

Salt Lake Meridian 257

Land rolling
Soil 1st rate
Timber cedar pine & Scrubs.

North between secs. 13 & 18
Var. 15° E.

40.00 Stone chained cedar post 18 x 4 x 4 in marked 4 on W. side post dug in 20 mounds of earth & rock from 4 pits each 24 x 14 x 12 in for 4 sec. cor.

80.00 Set limestone 15 x 10 x 5 in 10 in deep notched 2 N & 4 E, and raised mounds of earth from 4 pits each 24 x 14 x 12 in for cor to secs 7. 12 13 & 18

Land rolling
Soil 2nd rate
Timber cedar

End 767 Boundary of T. 42 S R 30 E

Miles		
	North between secs 2 & 12	Chains
	Var. 15° 30' E.	
39.00	Brook Indian N. Br.	3.00
40.00	Set Marked cedar post 4 x 4	9.70
	4 ins 14 in deep marked 4 on W.	
	sides and mound of	40.00
	earth pits each 24 x 12	
	x 12 ins for 1/4 sec. cor.	
45.25	Road bears N 60 E & S 60 W.	
80.00	Set limestone 16 x 10 x 10 ins 10 ins	46.80
	deep notched 1 N & S &	69.00
	mound of earth pits	78.10
	24 x 12 x 12 ins for	80.00
	cor. to secs 1. 6. 7 & 12	
	Land nearly level	
	Soil 1st rate	
	Timber scattering cedar.	

Chains | North, variation dec 18 E
Dir: 15°30' E.

3.00 | Wash drain E 60 Dr.

9.70 | Old State Road bears
N. E & S. W.

40.00 | Set Standstone 12 x 10 x 5 in
8 in. deep marked 1/4 on W.
side, witness mound of stone
for 1/4 sec. cor

46.80 | Wash drain E

69.00 | " " "

78.10 | " " "

80.00 | Set sandstone 20 x 14 x 10 in
15 in deep notched 6 N, S,
E & W for cor to townships
41 & 42 South Ranges
2 & 3 W.
Land marks bears N. 85
rods. Timber scattering, cedar

North 2554 Boundary of T. 42 S. R. 30 E.

Chains	The N.W. cor. of the T. not being 40 chains from the cor to T. 41 & 42 S., R. 29 & 30 E. on a
	West line between secs 1 & 36
	Dec. 15° 30 E.
36.50	Post of iron pipe with bottle
40.00	in S. slope on hills at Randstone 12 x 8 x 6 in 8 in. deep marked 4 on N side with mound of stone for 4 sec
	Note: Meander line here. Land mostly level
	Soil 1st rate.
	Timber scattering cedar
	Dec. 27th 1877.
	J. C. Burrill

For General Descriptions & approval see end of subdivisions notes of this Township.

BOOK-A-153

257

U. S. SURVEYOR GENERAL'S OFFICE,

Salt Lake City, Utah, June 21st 1877

The foregoing field notes of the survey of Exteriors (W. & N. boundaries) Township No. 42 S Range No. 3 W. Executed by Bailey & Burrill Under Joint contract of the 4th day of September 1876, in the month of Febuary 1877, having been critically examined, the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

Rolvan Kimball

Surveyor General for Utah.

BOOK-A-153 9

76

10a Examined by C. H. Cramwell - C. C.

Field Notes
of the
Survey of the
subdivision lines of
Township 42 South
Range 3 West
of the
Salt Lake Meridian
Utah Territory
by
Bailey & Burrell
under Joint Contract of
Bailey & Burrell
No. 73
dated September 4th 1876

Survey commenced Nov. 4th 1877
" completed March 1st 1877

Subdivisional lines of T. 4 N. R. 3 W.
Salt Lake Meridian.

263

Chains	Survey commenced Feb. 27th 1877 by P. C. Bailey — Runs the established Cor. to secs. 35 & 36 on S. boundary of Township 2 nth North bet. secs 35 & 36 Var 15° 30' E
40.00	Set limestone 15 x 10 x 5 ins. 10 ins deep marked 1/4 on W. side, with mound of stone for 1/4 sec. cor.
81.00	Set limestone 15 x 10 x 5 ins 10 ins deep marked 1 notch on S & E edges and mined mound of earth from 4 pits each 24 x 12 x 12 in for cor to secs 25, 26, 35 & 36
	Land rolling Soil 2nd rate rocky Timber cedar & pine

Chain

East on a random line between secs 25 & 36
Var 15° 30' E. 34.

40.00 Set temporary 1/4 sec cor.
60.00 Cross dike gully dr. S.E. 40.
70.00 Ridge bears S & N crossed to
80.00 Intersect E. boundary of T.
at cor to secs 25 & 36
from which
West on true line between secs 25 & 36 64.
40.00 Set limestone 15 x 10 x 5 in 10 80.
in. deep marked 1/4 on N side
with pyramid of stone for 1/4 sec
80.00 Pile cor. to secs 25, 26, 35 & 36
Land broken
Epic 2nd rate rocky
Timber Cedar & Pine

BOOK-A-153

Dr. Salt Lake Meridian

	Chains	
		West between secs 25 & 26
		var. 15° 30 E.
	34.00	Station Chain N 6°
		Cedar timber
E.	40.00	Set limestone 14 x 8 x 6 in.
		8 in. deep marked 1/4 Sec (Witness
		and mound of earth
		from pit) each 24 x 12 x 12
		for 1/4 sec. cor. on both sides
		of Pendarvis gulch down S.E.
	62.00	Cross trail N.E. & S.W.
	80.00	at Rock border 14 x 10 x 6 in.
		8 in deep marked 2 notches
		N.W. & 1 on E. sides and
		mound of earth from
		pit each 24 x 12 x 12 in.
		for cor. to secs. 23, 24, 25 & 26
		Land rolling
		Soil 2nd rate gravelly
		Timber cedar & pinon

Subdivision line of T. 42 N. R. 3 W.

Chains	
	East on a random line between secs 24 & 25 var. 15° 20' E.
14.50	Road runs N.E. & S.W.
33.50	Track crosses S.W.
40.00	Set temporary 1/4 sec. cor.
60.00	Enter cedars bears N.E. & S.W.
75.00	Creek bears N.E. & S.W.
80.00	Intersect E. boundary of T. at cor. to secs. 24 & 25 from which
	West on true line between secs 24 & 25
140.00	Deposited small stone marked with a cross (+) in mound of earth raised from 4 pits each 24 x 12 x 12 in. for 1/4 sec. cor.
80.00	The cor to secs 23, 24, 25 & 26
	Land rolling

Chains	
30.00	
36.00	
40.00	
55.00	
80.00	

Salt Lake Meridian 267

Chain. Set 2" iron pin mound

Thence North

North variation Dec. 23 & 24

Var. 5° 30 E.

Along W. Slope

Chains Arrive S.W.

30.00 " " "

36.70 " " "

Tp. 40.00 Set limestone 18 x 10 x 7 in
13 in. deep marked "T.W.
W. 1/4" with mound of
stones for 1/4 sec. cor.
from which
A cedar 6 in. dia bears
S 10° W. 35 lks dist marked
1/4 S. B. T.

55.00 Chains Arrive S.W., thence
along E. Slope

80.00 Set sandstone 14 x 12 x 7 in
9 in deep marked 1 notch on E.

Subdivision lines of T. 44 S. R. 3

Chains

Run S 3 m. E. clays and mixed mound of earth from 4 pits each 2 ft. sq. 2 in. for cor to secs 13 14 23 & 24. 80.00

Land hilly.
Soil fine sandy.
Timber on the Idaho.

Cast on a random line between secs 13 & 24
Var. 15° 30' E.

40.00 Set temporary 1/4 sec. cor. 37.00
57.00 Bridge Creek N.E. & Por. 40.00
81.00 Intersect E. boundary of Pat. at cor to secs 13 & 24 from which.
West on true line 53.00
Idaho on 13 & 24 80.00
40.00 Set sandstone 20 x 16 x 3 in. 15 in deep marked 1/4 on N.

BOOK-A-153

E. 3 N. Salt Lake Meridian 2609

Chains	Cor. & mine mound earth from 4 pits each 24 x 12 x 12 in for 1/4 sec. cor.
80.00	W. sec. cor. to secs 13 14, 23 & 24
	Land undulating soil 1st rate
	Timber some cedar on E. part.

North between secs 13 & 14
Var. 15° 30' E.

3.00	Caving drains W.
40.00	Depression small rock marked with a cross (+) in mound of earth mixed from 4 pits each 24 x 12 x 12 in for 1/4 sec. cor.
53.00	Road runs N.E. & S.W.
80.00	Set chained cedar post 48 x 4 x 4 in. 12 in deep marked 1 notch on E. & 4 on S. edge in mound

Subdivision lines between Secs 11 & 12 T. 21 N. R 3 W.

Drains

Mound & earth raised brow
4 pits each 24 x 4 x 4 in bor
cor to secs 11 12, 13 & 14
Found wooden cover
Set 1/4 sec stake
Variation of cor secs in various

Set on a mound line
between secs 12 & 13
Var. 15° 30' E.

9.25 Road bears NE. & SW.
40.00 Set temporary 1/4 sec. cor.
65.00 Wash drains SE.
80.00 Intersect E. boundary of
township 35 lks S. of cor to
secs 1 2 11 12
from which
S 89° 45' W, no tree line
between secs 12 & 13
40.00 Set charred cedar post

8.77

10.00

39.0

Salt Lake Meridian 24/11

	4 x 4 x 12 in. deep marked 1/4 S. on N. side in mound of earth mixed pits 4 pits each 24 x 12 x 12 in. deep
80.00	one cor to secs 11, 12, 13 & 14 Land level Soil 1st rate Timber scattering cedar. Note Abandon line here on account of bluffs Febr. 27th 1877 J. C. Bailey.
	Febr. 28th 1877 by J. G. Burnett North between secs 34 & 35 Var. 15° 30 E
10.00	Leave willow cedar bench enter flat bears N E & S W.
39.00	Wash drains N.E.

Subdivision lines of T. 42 S.

Chains		Chains
40.00	Set limestone 20 x 18 x 3 in. 15 in. deep marked 1/4 on N. side and raised mound of earth from 4 pits each 24 x 12 x 12 in. for 1/4 sec. cor.	20.00
		40.00
		47.00
67.00	Road bears N E & S W.	
87.00	Set limestone 15 x 10 x 6 in. 10 in. deep marked 2 on top & 1/4 on E. side and raised mound of earth from 4 pits each 24 x 12 x 12 in for sec to secs 26, 27, 34 & 35	87.00
		40.00
	Land mostly level Soil 1st & 2nd rate Timber cedar on E. 30 chs	
	East on a random line between secs 26 & 35 Var. 15° 30' E.	80.70
17.00	Road bears N E & S W.	

T. 3 N. Salt Lake Meridian

Chains	
20.00	Run South 100 lks. S. of line
40.00	Set temporary 4 cor. cor. under drains N.E. land. Beat entr timber bears N.E. & S.W.
87.10	Intersect N. & S. line at cor to secs 25, 26, 35 & 36. from which Mist on true line between secs 26 & 35
40.05	Set cor sandstone 24 x 9 x 3 in 18 in. deep marked ¼ on N. side and mound of earth from pits each 24 x 12 x 12 in for ¼ sec. cor.
80.10	¼ cor to secs 26, 27, 34 & 35.

Land mostly level
Soil 1st rate.

Subdivision lines of T. 44 S

Rain	Timber Cedar and Pine on E. part	Chain
	North between secs 26 & 27 Var. 17 30 E.	39.5 40.0
16.50	Mark drain E.	
17.30	" " "	
40.00	Deposited small piece of flint two feet to mark 1 in mound of earth raised from 4 pits each 24 x 12 x 12 in for 1/4 sec. cor.	45.0 80.0 40.0
41.50	Mark drain E.	65.0
80.00	Set charred cedar post 48 x 4 x 4 in 1 1/2 in. deep notched on E & S. edges in mound of earth raised from 4 pits each 24 x 12 x 12 in for cor to secs 22, 23, 26 & 27	80.0 40.0
	Land level, soil 1st rate Cov timber	

BOOK A-155

T. 3 N. Salt Lake Meridian

Chains	
	East on a random line between secs 23 & 26 Var. 15°30' E.
39.50	Wash mon. S.C.
40.00	Set temporary 1/4 sec. cor. at junction of two washes one heads N.W. the other S.E.
	accend wash to
45.00	Wash heads N.
57.00	" drains S.
60.00	leave flat accend to
65.00	Top of bench mon N & S.
80.00	intersect N & S line at cor to secs 23, 24, 25 & 26 from which
	West on true line between secs 23 & 26
40.00	Set sandstone 14 x 10 x 6 in 9 in deep marked 1/4 on N. side and mound of

Subdivisional lines of T. 42 S.

Chains		
	Earth mound 4 pits each 24 x 12 in. for 1/4 sec. cor.	
80.00	N.E. cor. to secs. 22 23 26 & 27	
	Open rolling	
	drift 12" pine	
	Hp timber	
	North between 22 & 23	34
	Var. 15° 30' E.	40
40.00	Deposited mound piece of flint	48
	two rocks to mark, in mound	76
	& earth mixed from 4 pits	80
	each 24 x 12 x 12 in. for 1/4 sec. cor.	
80.00	Set sandstone 12 x 12 x 8 in.	
	8 in. deep scribed 2 on E. & S.	
	on E. edge and mound	
	of earth from 4 pits each	40
	24 x 12 x 12 in. for cor. to secs.	
	14, 15, 22 & 23	

R 5 W. Salt Lake Meridian 227

Land level
dril 1st pits
Dis timber

Last cor. meander line
between secs 14 & 23
Var. 15° 30' E.

34.00 Wash drains S.
40.00 Set temporary 1/4 sec. cor.
48.00 Ascend brush bare limestone
70.00 Cedar ridge runs N. & S.
80.00 Intersect N & S line at
cor. to secs 13, 14, 23 & 24
from which
West on true line
between secs 14 & 23
40.00 Set sandstone 20 x 10 x 4 in.
15 in. deep marked 1/4 on S.
side and raised mound of
earth from 4 pits each

Subdivision lines of T. 42 S. R. 30 E.

Chains 80.00	4 x 14 x 14 in hor 4 sec cor. Thence cor. to secs 14, 15, 22 & 23 found 6 x 6 burnt cor. no pits; Balance undulating 1st rate. Timber Cedar on 6 ch.	Chains 80.00
	North between secs 14 & 15 Var. 15° 30' E.	
3.60	Road runs N E & S W.	
4.60	" " " "	
16.00	" " " "	
40.00	Set Sandstone 14 x 8 x 5 in 9 in deep marked 1/4 on W. side and mound of earth from 4 pits each 6 x 6 x 6 in hor. [illegible] from which Cedar 5 in. dia bears S 8° E. 25 links dist marked 1/4 S. B.T.	20.00 30.00
60.00	Cedar brands bears N E & S W.	

Salt Lake Meridian 229

Chains

80.00 Set sandstone 19 x 15 x 3 in 14 in deep notched 2 on E & 4 on W sides, with mound of stone for cor. to secs. 10. 11. 14 & 15 from which

W Cedar 6 in dia bears S 89 E 75 lks dist. marked S 14 L. 42 S. R 3 W. B.T.

Land level & broken soil Loose

Cor Cinder

East on a random line between secs 11 & 14

Var. 15° 30' E.

20.00 Leave brooks enter low flat bears N & S.

25.50 Trail bears N & S.

30.50 Buckskin Gulch drains S. hands N 40° W.

Subdivision lines of T. 7 N. R. 9 E.

Chains		Chains
40.00	S.E. Meanders N. 14 sec. Cor.	
71.80	Road bears N.E. & S.W.	
80.00	Intersect N. & S. line 85 lks.	
	E. of cor. to secs. 11, 12, 13 & 14	
	from which	
	Pine 8 in. 45° W. on true line	10.
	between secs 11 & 14	30.
40.00	Set sandstone 12 x 11 x 3 in	40
	8 in. deep marked 1/4 on N. side	
	and mound of	
	earth from 4 pits each 24 x 12	55.
	12 in. for 1/4 sec. cor.	58.
80.00	The cor. to secs 10, 11, 14	73.
	& 15.	80.
	Land mostly level	
	Soil 1st rate	
	No timber.	
	Note: Meanders Pine River.	
	Octr. 28th 1877 J. C. Burnett	

T 3 N. Salt Lake Meridian

Chains	Dec. 28th 1874
	by J. C. Bailey
	North between secs 33 & 34
	Var. 15° 30' E.
10.00	Pinto on line
20.00	Ridge trends N E & S W.
40.00	Set sandstone 22 x 18 x 2 in 15 in deep marked 4 on W. side with mound of stone for 1/4 sec. cor.
53.50	Brass Brass N.E.
58.50	" " "
73.50	Old Corn bears N E & S W.
80.00	Set sandstone 22 x 18 x 2 in 15 in deep notched 3 on E & 1 on S. edge and raised a mound of earth from 4 pits each 24 x 12 x 12 in for cor to secs 27, 28 33 & 34

28 v

Subdivision line of T. 42 S.

Chains

Land lines
Set 1st rate
Timber & few cedars on S. B.

E. & W. on a random line
between secs 27 & 34
Var. 15° 30' E.

6.00 Road bears N.E. & S.W.
14.00 Set temporary 1/4 sec. cor.
4.00 Wash drains N.E.
80.04 Intersect N. & S. line 11 lks
E. of cor. to 26. 27. 34 & 35
from which
E. 89° 53' W. on true line
between secs 27 & 34
4.00 Depression around stone mound
with a cross (+) in summit
of earth mixed from 4 pits
each 24 x 12 x 12 in. for 1/4 sec.

Ch
87.
14.
26.
40.

R. 3 W. Salt Lake Meridian

Chains 80.00	Ne cor. to secs 27, 28, 33 & 34 Land nearly level Soil 1st rate No timber.
	North between secs 27 & 28 Var. 15° 30' E.
14.00	Small knoll 50 lks W. of line
26.50	Wash drains E. Have left outer broken clay hills —
40.00	Set chaneled cedar post 48 x 4 x 4 in 12 in deep marked 1/4 S. on W. side in mound of earth raised from 4 pits each 24 x 12 x 12 in. for 1/4 sec. cor. from which A cedar 12 inches bears S 45° W 45 lks dist. marked 1/4 S. B. T.

Subdivision line between Secs. 21 & 22 T. 42 S. R. 3 W.

Chains		Chains
80.00	Set standard 16 x 12 x 3 ins.	40.00
	on line mound marked 3 notches	40.00
	on E & W on S. edge, with mound	80.00
	of stone for cor to secs 21,	
	22, 27 & 28	
	Down hill	
	Creek 8 lks. dia. bears	
	N 89° E 1/2 lks dist marked	40.00
	Pine 12 in. D. 42 S. R 3 W. B.T.	
	Down hill	
	Level to creek	
	Timber Cedar & pine.	80.00

Set on standard line

between secs 22 & 27

Dist 15.30 E.

40.00	Leave clay hill, & enter flat brush
	N. E. & S.W.
34.50	Road bears N.E. & S.W.

BOOK A-153 285

U. S. M. Salt Lake Meridian

Chains	
40.00	Set temporary 1/4 sec. cor.
40.00	Made brass C. C.
80.00	Intersect S. & E. line 10 lks S. of cor. to secs 22, 23, 26 & 27 from which R. 89° 30' W. on true line bet. secs 22 & 27
40.00	Deposited small stone marked with a cross + in mound of earth driven stone + pits each in 24 x 12 x 12 in. for 1/4 sec. cor.
80.00	The cor. to secs 21, 22, 27 & 28

Land mostly level.
Soil 1st rate.
No timber.

North between secs 21 & 22
Var. 15° 30' E

Subdivision lines of S. 4 T. 9 S. R. 30 W.

Chains		Chains
35.70	Leave clay hills enter flat	
	open E & W.	
46.00	Set mound of stone 12 x 12 x 8 ins.	
	deep marked 14 on W. side and	
	raised mound of earth 2 ft.	
	4 pits each 24 x 12 x 12 in. for	
	1/4 sec. cor.	
41.70	Mark trees E.	
57.40	Road runs N.E. & S.W.	
67.00	Trail & Teaps Springs	
	bear N.E. & S.W. enter clay	
	hills	24.52
73.00	Mark trees S.E.	40.00
80.00	Set mound sandstone 20 x 10 x 8 ins.	
	15 in. deep notched 3 on E. &	
	S. edges, with mound of	47.32
	stone for cor. to secs. 15, 16,	68.32
	21 & 22	77.50
	Trees which	
	A cedar 6 in. dia. bears N. 1/4	81.00

BOOK-A-153

Chains

15 12 dist. marked 4/16
T. 4 S. R. 3 W. U. S.
Land middle East line, one
rock mile.
Balanced broken
Iron 2nd rate
Timber a few cedar

East on a meander line
between Secs 15 & 22
Var. 15° 20' E.

24.57 Wash drains S.
40.00 Set temp. 4 sec. cor. at
E. foot of clay hills bear
N. & S.
47.57 Road bears NE & SW.
68.22 " " " "
77.50 " " " "
81.00 Intersect N. & S. line

Subdivision Lines T. 42 S. R. 3 W.

285

Chains	
	at Cor. to secs 14, 15, 22 & 23 from which
	West on true line between secs 15 & 22
40.00	Set sandstone 10, 12 x 3 in. ↓ deep marked ⅓ on N. side with Bronze & stone ↓ 4 sec. Cor.
80.00	The Cor. to secs 15, 16 21 & 22. Land E ½ land poor 1st rate W ½ broken hilly & rocky 1st rate timber cedar on W. ½
	North between secs 15 & Var. 15° 30' E. over broken stony hills &
40.00	Set sandstone 12 x 12 x

Chains

80.00

40.00

80.00

26.50

Salt Lake Meridian

Mons	8 in. deep Marked 4 on W. side, with Mound of Stone for 1/4 sec. cor.
57.00	Rocky butte about 10 chs E.
60.00	4" cedar bears S 57 W.
57.00	Set Charred cedar Post 48 x 4 x 4 in. 12 in deep, notched 3 on E & 4 on S. sides in mound of earth mixed with 4 pits each 24 x 12 x 12 in. for cor to secs 9. 10. 15 & 16
	Land broken
	Soil Red rocky
	Timber Cedar & Pine

East on a random line between secs 10 & 15
Var. 15° 30. E

2.50	Leave bench descend into

Subdivision lines of T. 42 S. R. 3 W.

Chains		Chains
	Rocky knoll mon. to W. & E.	80.00
28.50	Deep wash drains E.	
38.00	Sharp short point of white ledge where there is good indications of Mineral bodies	Note
40.00	Set temporary ¼ sec. cor.	
57.00	Wash drains E. & W.	
80.00	Intersect N. & S. line 35 lks E. of cor to secs 10, 11, 14 & 15 from which	
	S. 80° 45' W. on bno line between secs 10 & 15	10.50
40.00	Set sandstone 14 x 14 x 2 in. 9 in. deep marked ¼ on N side, with mound of stone for ¼ sec. cor. from which	29.70 40.00
	A pine 10 in. dia. bears N. 65° E. 60 lks dist marked ¼ B. T.	

BOOK-A-153

791

Salt Lake Meridian

Chains	
80.00	The cor to secs 9. 10. 15 & 16 Found mound, broken Pit 2 ins deep Planted cedar & Pine Mountains bear here.
Note:	Feb. 28th 1877. J. C. Bailey

March 1st 1877

by J. S. Burnie

North between secs 32 & 33

Var: 15° 30' E.

10.50	Track bears S.W.
27.70	Road bears N.E. & S.W.
40.00	Set limestone 14 x 10 x 5 ins. 9 ins. deep marked 1/4 on W. side and mound mound of stone for 1/4 sec cor. from which A cedar 12 in dia bears N. 40° W.

Subdivision lines of S. 32 T. 42 S. R. 30 W.

Chains		Chains
45.00	13 4 lks. dist. marked S. 32 T. 42 S. R. 30 W. B. T. Land level and clear Soil 1st rate Timber cedar & pine on S. ½	
	Land level and clear	
79.00	Course East.	79.00
87.00	Set Pt and Sandstone 36 x 15 x 7 in. 27 in deep marked + notches on E. & W. edges, with mound of stone for corner Secs 28, 29, 32 & 33 from which A pine 10 in dia bears S. 8° W. 70 lks. dist. marks S. 32 T. 42 S. R. 30 W. B. T. Land S. & level Soil 1st rate Timber cedar & pine on S. ½	65.00
		79.70
		39.85

Salt Lake Meridian

Chains	Ran on a random line between secs 28 & 33 Var. 15° 30' E.
4.00	Set temporary ¼ sec. cor.
65.00	Leave clay hills enter flat bears N.E. & S.W.
79.70	Intersect N & S line 50 lks E. of cor. to secs 27, 28, 33 & 34 from which S 50° 30' W. 10 lks line between secs 28 & 33
39.85	Set sandstone 18 x 16 x 2 in. 12 in deep marked ¼ on N. side and raised a mound of earth from & pits each 2 ft. from for ¼ sec cor from which A pine 24 in. dia. bears N 30° W. 88 lks dist.

Subdivision lines of T. 42 S.

29

Chain	marked 4 & 3. T.
0;0	The cor. to secs 28, 29, 32 & 33 —
	Land rolling
	soil 1st & 2nd rate
	timber Cedar & Pine.

North between secs 28 & 29.
Var. 15° 30' E.

0.50	Rock ledge bears N.W. & S.E.
40.00	Set charred cedar post 48 x 4 x 4 in. 12 in. deep marked 1/4 S, 29 W. side in mound of earth raised from 4 pits each 24 x 12 x 12 in. for 1/4 sec. cor.
60.00	Stone clay hills enter East between N.E. & S.E.
80.00	Set charred cedar post 48 x 4 x 4 in., 12 in deep, notched N.E. & W. sides, in mound

C. 3 Dr. Salt Lake Meridian—

Drains | 2 earth mounds from 4 pits each 24 x 12 x 12 in for cor to secs 20, 21, 28 & 29.
Land S. woods broken
Soil 2nd rate
Balance level soil 1st rate
Timber cedar & pine

East on a random line
between secs 21 & 28
Var. 15° 30' E.

16.50 Wash drains N.E.
37.50 " " "
40.00 Set temporary ¼ sec. cor.
on E. clay hills bears N 5° E 1.00
80.00 Intersect N & S line at cor.
to secs 21 22, 27 & 28
from which
West on true line

Subdivision lines of T. 44 S.

Links	
	between secs 21 & 28
40.00	Set sandstone blk 15 x 5 x 2 in 10 in deep marked 44 S N. side and mound 4 earth trench 4 pits each 24 x 12 x 12 in for 1/4 sec. cor.
8.00	Pit cor. to secs 20. 21. 28 & 29.
	Land rolling
	Soil 1st & 2nd rate
	Timber Cedar & pinon

North between secs 20 & 21
Var. 15° 30' E.

3.30	Wash drain N.E.
7.96	Road & wash drains N.E.
35.00	Deep wash drains S.E.
40.00	Deposited small rock mound with a cross (+) in mound

R. 3 W. Salt Lake Meridian —

Chains	of earth raised from 4 pits each 2 ft x 12 x 12 in for 1/4 sec cor.
45.71	Top of small red hills bear N. 41° E & N. 8° E.
49.50	Wash trends E.
60.50	Wash trends S. W.
70.00	Red sand ledge bears N.W. & S.E.
80.00	Set sandstone 18 x 13 x 9 in 3 in. deep, marked 4 notches on E & 3 on S. edges, with mound of stone for cor to secs 16, 17, 20 & 21
	from which
	A cedar 36 in. dia. bears S 30° E 40 lks dist marked S 21 T 42 S R 3 W B.T.
	A cedar 15 in. dia. bears S 80° W. 4 lks dist marked S 20 B.T.
	Land S & level, soil 1st rate
	N & broken, soil 2nd rate

Book 298, Line N. 424

Station: Pueblo Cedar & pines.

East on a random line between secs 16 & 21
Var. 15° 30' E.

N.12	Set temporary 1/4 sec. cor.	
52.00	Pile stones N.W. & S.E.	
23.00	Large spring 8 inch drain S.E.	3.50
30.50	Intersect N. & S. line at cor	
	to secs 15, 16, 21 & 22	23.75
	from which	3.00
	West on true line	38.50
	between secs 16 & 21	4.00
110.25	Set sandstone 5 x 5 x 4 in	
	10 in. deep marked + on S.	
	side & pits pointed to Cor	
	from 4 pits each 24 x 12 x 12	
	in for 1/4 sec. cor.	
80.50	the cor to secs 16, 17,	

BOOK-A-153

T 3 S. Salt Lake Meridian 19

8 & 21

Land broken

Soil sand clay

Timber Cedar & pinon

North across sec 16 & 17

Var. 15° 30' E.

3.50 Tops of ledge bears E. & W.

Descend -

23.75 Gulch drains E.

30.00 Wash drains S.E.

38.50 " " "

40.00 On top of white sandstone ledge bears E & W. set sandstone 20 x 20 x 6 in. 15 in. deep marked 1/4 sec 16 sec 17 with mound of stone for 1/4 sec. cor. from which

A cedar 20 in. dia bears

Subdivision lines of T. 42 S. R.

Chains

Chains. S. 80 E. 22 lks to dist
marked T. C. ;
48.00 Leap Spring Wash down E.
thence E. 5 chs to Leap 14.00
Spring 36.32
53.00 Enter boulder flat 46.00
70.50 Top of bare clay peak
80.00 Set sandstone 12 x 8 x 5 in. 8 in.
deep notched 4 on E. & S. edges, 79.40
with mound of stone for
cor. to secs 8, 9, 16 & 17
from which
A pine 3 in diam bears S. 60°
50 lks dist marked T. 42 S. 39.70
R. 3 W. B. T.
Land broken
Soil red rich
Timber Cedar & pine

R. 3 W. — Salt Lake Meridian.

Chains	
	Ran E. on a random line between secs 9 & 16 Var. 15° 30' E.
14.00	Rock drains S.E.
36.00	" " "
40.00	Leave broken ground, enter flat bears N. & S. Set temporary ¼ sec. cor.
79.40	Intersect N. & S. line to Rs N. of cor. to secs 9, 10, 15 & 16 from which N. 89° 30' W on true line between secs 9 & 16 Set sandstone 24 x 9 x 7 in. 2-7 in. deep marked ¼ on N. side, with mound of stone for ¼ sec. cor. from which
39.70	A cedar 10 in. dia. bears S. 15° E. 140 lks. dist. marked

Subdivision lines of T. 4 S. R. 2 E.

Chains		Chains
40.00	1/4 S. of S.	
	The cor. to secs 8, 9, 16 &	
		48.00
	Land level & broken	37.00
	soil 2nd rate	12.50
	E. 1/2 land soil 1st rate	
	timber cedar & pine	70.00
	Note: Abandon line here	
	March 1st 1877.	80.00
	J. C. Bailey	

March 1st 1877

by J. C. Bailey

North between secs 31 & 32

Var. 15° 30' E.

37.00	Cr. Coal R. Low ridge
40.00	Set sandstone 16 x 8 x 10 in.
	10 in. deep marked 1/4 on W.
	side, with mound of stone

BOOK-A-155

R 3 W. Salt Lake Meridian

T. 8 S.

Chains	
	For 1/4 sec. Cor. on S. side of telegraph line.
48.70	Pine 8 ins. E.
60.00	" " S.E.
52.50	" " "
70.00	Clay hill bears E & N. 12 lks.
87.00	Cor. Dr. slope of foot hill set sandstone 18 x 12 x 8 in. 13 in. deep notched 5 on E. & 1 on S. edges and mine mound of earth from 4 pits each 24 x 12 x 12 in. for cor to secs. 24. 30. 31 & 32. from which
	A cedar 14 in. dia bears S 19 W. 90 lks. dist marked T 31, T. 42 S. R 3 W. B. T.
	A cedar 12 in. dia bears

Subdivision lines of T. 42 S.

Rains S. 9° E. 98 lks dist marked Chain
S. 32 E. 40.4
Land nearly level
Soil pd sale
Timber scattering Cedar.

Unit on a random line
between secs 28 & 32 80.00
Var. 5° 30 E.

10.00 Ridge bet N E & S W.
12.00 Head of Wash drains S E.
Wash drains S.
" " "
Set Temporary Quar. Cor.
Wash drains S E.
8.50 Intersect N boy of line 35 lks 3.50
S. 1 Cor to secs 28, 29, 32 & 33 from which 32.00
S. 89° 45' W. on true line 40.00

T. 2 S. R. 3 W. Salt Lake Meridian.

Chains

40.45 Between secs 29 & 32
Set sandstone 16 x 6 x 3 in. 10 in.
deep marked 1/4 on N. side, with
mound of stone for 1/4 sec. cor.
from which
A cedar 10 in. dia. bears S. 20° W.
4.5 lks dist marked 1/4 S. B. & T.

80.52 The cor. to secs. 29, 30, 31 & 32
Land broken
Soil 2nd rate
Timber cedar & pine.

West on a random line
between secs 30 & 31
Var. 15° 30' E.

3.75 Leave hills bears N. & S. entire
Telegraph line.

32.20 Road bears N.E. & S.W.

40.00 Set temporary 1/4 sec. cor.

Subdivision lines of Sec. 4 & 9.

Chains		Chains
80.24	Intersect N. boundary of Sec 4 & 9	15.50
	Set stone S. & Cor. to secs 4 & 9	
	30 & 31 links from which	31.50
	a pine 8 in dia bears	
	S. 89° 53' E. distant	
	between secs 30 & 31	46.00
110.24	Set Planted cedar post	
	4 x 4 x 4 in 12 ins deep	
	marked 1/4 S. on N. side	
	in mound of earth	
	pits dug 4 pits each	
	4 x 12 1/2 in for 1/4 sec. Cor.	
80.24	Run Cor to secs 29. 30.	
	31 & 32	
	Land level	56.50
	Soil 1st rate	80.00
	Timber pine & cedar.	

North between secs 29 & 32.
Var. 15° 30' E.

5.50 Track crosses N.

Chains

15.50 Track Transit N. & enter brush
land worked hills

31.50 Road to Paria bears N.E. &
& S.W. in hollow draws S.W.

46.00 Set sandstone 16 x 12 x 5 in. 10 in.
deep mound 4 on W. side and
record a mound of earth from
4 pits each 24 x 12 x 4 in. for
1/4 sec. c.r. from which
a pine 5 in. dia. bears
S. 65 W. 18 lks dist marked
B.T. 4 S. B. T.

57.50 Low hills bears N.E. & S.W.

87.00 Set sandstone 12 x 12 x 4 in.
8 in. deep notched 5 cms E. & 2 cms S. sides
with mound of stone for cor. to
secs. 19. 20. 29 & 30 from which
A cedar 14 in. dia. bears N. 80 W.
15 lks dist marked T 19 T. 42 S.

Subdivision into L. 42 &.

Chains | C. 3 W. 2. N.

A Cedar Riv. dia. near S 80 W.

5 lks last marked S. 30 W. 40.20

Land nearly level

Soil & Title

Timber Cedar & pine.

East on a random line 80.40

between secs 20 & 29

Var 5° 30 E.

13.00 Creek Arms N.E.

1.00 " "

40.00 Set Quarter, & sec. cor.

40.00 Enter Cedar Island Lake

N.E. & S.W.

68.50 Main Road runs N.E. & S.W.

80.40 Intersect N. & S. line. 35 lks E. 40.00

Set cor. to secs 20, 21, 6.20

28 & 29 from which 8.00

T. 3 N. Salt Lake Meridian

Chains

S. 84° 45' W. on true line
between secs 20 & 29

40.20 Set Chained Cedar post 48 x 4 x
4 in 12 in. deep marked 1/4
S. on N. side in mound of earth
raised from 4 pits each 24 x 12
x 2 in for 1/4 sec cor.

80.40 The cor. to secs 19. 20. 29
& 30.
Land broken
Soil 1st rate
Timber scattering cedar.

West on a random line
between secs 19 & 30
Var. 15° 30' E.

40.00 Set temporary 1/4 sec. cor.
62.00 Wash! Enters N.E.
85.75 Intersect Or. boundary

Subdivision lines in T. 42 S. R.

Chains	At Township cor to secs 19 & 30 from which East on true line between secs 19 & 30	Chains
40.00	Set sandstone 24 x 4 x 8 in 18 in. deep marked 1/4 on N. side with mound of stone Nor 1/4 sec. Cor.	79.10
80.00	The Cor. to secs 19, 20 29 & 30 Land level Soil 1st rate Timber Pine & cedar.	80.00
	North between secs 19 & 20 Var 15° 30' E.	
28.30	Track drains E.	
40.00	Set sandstone 16 x 10 x 4 in 10 in. deep marked 1/4 on W side	

R. 3 W. Salt Lake Meridian

Chains

and raised mound of earth
from 4 pits each 24 x 12 x 12 in
for 1/4 sec. cor.
from which
A cedar 14 in. dia. bears East 27 lks dist
" " 10 " " " West 5 " "
Both trees marked 1/4 S. B. T.
79.10 Track drains S.E.
80.00 Set monument 15 x 6 x 24 in.
10 in. deep notched 5 on E & 3 on
S. edges and raised mound of
earth from 4 pits each 24 x 12 x 12 in
for cor to secs 17, 18, 19 & 20
Land level
Soil 1st rate
Timber scattering cedar & pine

East on a random line
between secs 17 & 20
Var. 15° 30 E.

Subdivision lines of s. 4 & 9.

Chains	
0.00	... branch in dep. Chain
	Mark ... & E.
38.00	Mark ... S.
40.00	Set temporary 1/4 sec. cor.
80.00	Lake shore N. E. & S. W.
80.00	Intersect N. & S. line at cor. 23.0
	to secs 16, 17, 20 & 21
	from which 40.0
	... ash a tree line
	between secs 17 & 20
40.00	Set sandstone 17 x 9 x 6 in
	13 in deep, marked 1/4 on N.
	side and mound of
	earth from pit each 24 x 14
	12 in. for 1/4 sec. cor.
80.00	The cor. to secs 17, 18, 19 & 20
	Land nearly level
	soil 1st rate
	Timber scattering cedar & pine

S. R 3 W. Salt Lake Meridian 018

The W. boundary of T. not being run thereon 2 runs West on true line between secs. 18 & 19 Var 15° 20 E.

2300 Pits & Perpendicular Ledge bears N & E.

4000 Iron 4 sec cor falling in bluffs cannot be set thereon at 23.00 chs set Chained cedar post 4 8 x 4 x 4 ins 12 ins. deep marked on N. side 1/4 S. W. C. in mound of earth raised from 4 pits each 24 x 12 x 12 in for witness 1/4 sec. cor.

Note: Abandoned line here.

Land broken

Soil 2nd rate

Timber mixed cedar

Subdivision lines of T. 47 S. R 3

Chains

North between secs 17 & 18

Var. 5° 30 E.

12.00 Iron branch drains S.E.

46.00 Set charred cedar post 46.00

4 x 4 x 4 in 12 in deep

Marked 1/4 S. on W. side in summit of

earth mound 4 pits each

24 x 12 x 12 in for 1/4 sec cor.

79.00 Mark drains S.E.

87.00 Set charred cedar post 46.05

4 x 4 x 4 in. 12 in deep

Notched 4 on S. edges

Notched 5 on E. in summit of earth

mound 4 pits each 24 x 12

x 12 in for cor to secs 7. 8. 17 & 18 87.10

Land undulating

Soil 2nd rate

Timber chiefly cedar & pine

R 3 W. Salt Lake Meridian

8 Chains East on standard line between secs 8 & 17
Var. 5° 30' E.

40.00 Set temporary 1/4 sec cor.

80.10 Intersect N. & S. line 20 lks E. of cor to secs 8, 9, 16 & 17.
From which
S. 89° 57' W. true line between secs 8 & 17
40.05 Set sandstone 13 x 8 x 5 in. 8 in. deep marked 1/4 on N. side, with mounds of stone for the cor.

80.10 The cor to secs 7, 8, 17 & 18
Land broken
Soil 2nd rate
Timber scattering
Cedar & pine.

Subdivision 216 Lines of L. N. 42 8 R. 3 W

Chains		Chains
	West on true line between secs 7 & 18 Var. 15.30 E.	53.72
100	Wash. & mine [illegible]	80.00
2000	Iron & Mounds bear N. & S.	
40.00	Set Sandstone 12 x 12 x 6 in 8 in deep marked 1/4 on N. side with mound of stone for 1/4 sec W.	
	Note: Stands on line here. Land hilly Soil red mix Timber scattering cedar	
	North between secs 7 & 8 Var. 15.30 E.	
40.00	Set Sandstone 12 x 10 x 7 in. 8 in deep marked 1/4 on W side and raised a mound of	

BOOK-A-155

R. 3 W. Salt Lake Meridian 31 7

Station
53.77
.8000

earth from 4 pits each 24 x 12 x 12 in. for 4 sec. cor.

Post of Mts bear N. E. & S. W.

True cor. falling in Mts and not to set thereon at 53.77 chs set sandstone 12 x 9 x 6 in. 8 in. deep marked 5 notches on E. & S. edges & W. C. with mound of stone for witness cor to secs 5, 6, 7 & 8

Land broken

Soil 4th rate

Timber scattering cedar & pine.

Note: Abandon this land March 1st 1877

J. C. Bailey

Subdivision lines 4 v. 42 & R 3

General Description -

The surveyed lands in this township embrace a portion of Kimball Valley, a part of the cedar & pine timber on the north end of the Buckskin Plateau - a portion of Telegraph Peat and some low clay hills containing Gypsums which I mean as Gypsum lands as follows viz: Sec 15; N ½ of N.W ¼ & W ½ S.W. ¼ of Sec 16; E ½ of Sec 17; E ½ of N.E. ¼ Sec 20; W ½ of N.W ¼ & S.E ¼ of S.E ¼ sec 21; W ½ of S.W ¼ Sec 22; W ½ of N.W ¼ sec 27; N ½ sec 30; S.E ¼ secs 29; N ½ of N.E ¼ sec 32

R 3 W. Salt Lake Meridian 319

N½ of N.W. ¼ Sec. 33 and all of secs 28 except the N½ of N.W. ¼ as shown on the plat.

The balance I return as timber and agricultural land —

F. C. Bailey
Dep. Surveyor.

320-321 Blank 321

BOOK-A-153

BOO

11a 6

U. S. SURVEYOR GENERAL'S OFFICE,

Salt Lake City, Utah, June 21st 1877

The foregoing field notes of the survey of the Subdivision lines of Township No. 42 S. Range No. 3 West Executed by Bailey & Burrill Under joint contract of the 4th day of September 1876, in the month of Feb'y & March 1877, having been critically examined, the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

Nathan Kimball

Surveyor General for Utah.

BOOK-A-153

11a

Examined by C. H. Cranwell. C. E.

Field Notes
of the
Survey of the
Subdivision lines of
Township 42 South
Range 4 West
of the
Salt Lake Meridian
by
J. G. Burnie
under Joint contract of
Bailey & Burnie
No 73
Dated September 4th 1876.

Surveyed Febr. 27th 1877.

BOOK-A-153

324

Township 42 South R. 11 West

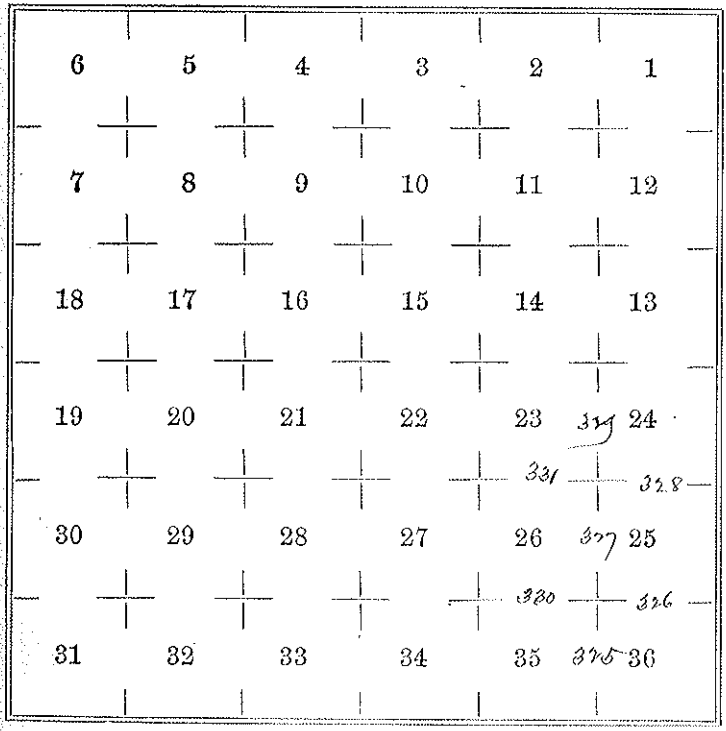

BOOK-A-153

Subdivisional lines of T. 42 S. R 4 W.
Salt Lake Meridian

525

Survey commenced Febr. 27th 1877
by D. E. Burrill

Runs the cor to secs 35 & 36
on S. boundary of township
2 mls

North between secs 35 & 36
Var 15° 30' E.

23.00 Mark drains N. 80° E.

40.00 Set Charred cedar post 48 x
4 x 4 in 12 in deep marked
1/4 on W. side in mound of earth
raised from 4 pits each 24 x 12
x 12 in for 1/4 sec. cor.

57.50 Mark drains S 80° E

80.00 Set sandstone 18 x 10 x 10 in 12
in deep marked 1 notch on S &
E edges & raised mound of
earth from 4 pits each
24 x 12 x 12 in for cor to secs
25, 26, 35 & 36

Subdivisional lines of T. 42 S. R 4 W.

Chains		Chains
	from which	
	A cedar 11 in. dia. bears	
	N 10° W. 65 lks dist. marked	40.00
	S. 26 T. 42 S. R 4 W. M. T.	
	Land level	
	Soil, [illegible]	
	Timber Cedar	
	East on random line	80.00
	between secs 25 & 36	
	Var. 15° 30' E.	
	Through Telegraph Road	
15.00	Old Indian Fort 50 links	
40.00	Set temporary 1/4 sec cor	
38.00	Wash drains S. W.	
75.00	Old Indian Fort on low ridge	
	& a lone cedar in line.	40.00
80.00	Intersect E. boundary of T.	
	at cor to secs 25 & 36	
	from which	80.00

BOOK-A-153

Salt Lake Meridian 37

Chains	
	West on true line between secs 25 & 36
40.00	Set sandstone 16 x 10 x 3 in. 10 in deep marked 1/4 on N. side, with mound of stones for 1/4 sec. cor. from which A cedar 15 in. dia. bears West 150 lks dist marked 1/4 S. B.T.
80.00	The cor. to secs 25, 26 35 & 36 Land level Soil 1st rate No timber

North between secs 25 & 26
Var 15° 30' E.

40.00	Set sandstone 16 x 10 x 4 in. 11 in deep marked 1/4 on W. side, with mound of stones for 1/4 sec. cor.
80.00	Set sandstone 16 x 10 x 5 in

Subdivision lines of T. 4 N. R. 4 W.

Chains	Run North, marked, notch on Chains	
	E. & W. on S. sides with mound	
	of stones for cor. to secs.	
	23, 24, 25 & 26	80.00
	Land level N ½ broken	
	Soil [illegible]	
	Timber cedar on N. ½	
	East on a random line	
	between secs 24 & 25	
	Var. 15° 30' E.	
18.00	Wash drains S. E.	40.00
40.00	Set temporary ¼ sec. cor.	
80.00	Intersect E boundary	
	of township at cor to secs	
	24 & 25 from which	
	West on true line	
	between secs 24 & 25	
40.00	Set sandstone 12 x 12 x 5 in	

Salt Lake Meridian 329

Chains

8 in deep marked 1/4 on N side, with Mound of Stone for 1/4 Sec cor.

80.00

The cor to Secs 23. 24. 25 & 26 —

Land broken
Soil 1st rate
Timber cedar & pine

North between 23 & 24
Var. 15° 30' E.

40.00

Near foot of bluff bears E & W.
Set Sandstone 12 x 12 x 7 in
8 in deep marked 1/4 on W.
side, with Mound of stone
for 1/4 Sec. Cor.
Note: 8 abandoned line bears
Land broken Soil 2nd rate
Timber cedar & pine

Subdivision lines of T. 42 S. R 40 E.

BOOK

Gau

Chains

Chs it is impracticable on account of the mountains to run the true meridian between 35 & 36 Benton Iron mound the cor. to secs 25 & 26 35 & 36 2 mds West on true line between secs 26 & 35 Var. 15° 30' E.

40.00 Set sandstone 15 x 10 x 7 in. 8 in. deep marked ¼ on N. side, with mound of stone 1.00 for ¼ sec. cor. 40.00

55.00 Foot of bluffs bears N & S.

60.00 The true cor. falling in bluffs cannot be established therefore at 55.00 Chains I set sandstone 18 x 6 x 5 in. 11 in. deep marked 2 notches on E & 1 on S. edges & N C., with mound of stone

Chains

For Meander Cor. to secs
26, 27, 34 & 35:
Land mostly level
Soil 1st rate
timber, cedar on W. 15 chs

Run thro Cor to secs
23, 24, 25 & 26 2 miles
West on true line
between secs 23 & 26
Var 15° 30 E.

150 Struck bronze I.C.
200 Set sandstone 12 x 12 x 7 ins
8 ins deep marked 1/4 on E.
side, with mound of stone
for 1/4 sec. cor. at foot
of bluff bears N & E.

Note On account of
the rock bluffs I abandon
the further survey

Subdivisions of Sec. 2 T. 42 S. R 4 W
Salt Lake Meridian

002

of this township
Land mostly level
soil is rich
Timber cedar & pine.

General Description

The small surveyed
portion of this township
embraces what is called
"Telegraph Flat" and the
cedar & pine timber
bordering thereon. The
lands are agricultural.
Feby 17th 1897

J. S. Burrill
U. S. Dep. Surveyor

BOOK-A-153

382

U. S. SURVEYOR GENERAL'S OFFICE.

Salt Lake City, Utah, June 21st 1877

The foregoing field notes of the survey of The Subdivisions of Township No. 42 S. Range No. 4 W. Executed by Bailey & Burrill Under Joint — contract of the 4th day of September 1876, in the month of February 1877, having been critically examined, the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

Nathan Kimball

Surveyor General for Utah.

BOOK-A-153

335

12th Examined by C.W. Caldwell & C.C. Chipman

Field Notes
of the
East Boundary
Township 2 South Range 3 West
Salt Lake Meridian
Utah Territory
as surveyed by
J.H. Burrill
under joint contract Bailey & Burrill
No. 73 — dated Sept 14th 1876.

Survey commenced Feb 10th 1877
" completed " " "

63 0

335 A

BOOK-A-153

Township 43 South R. 5 West

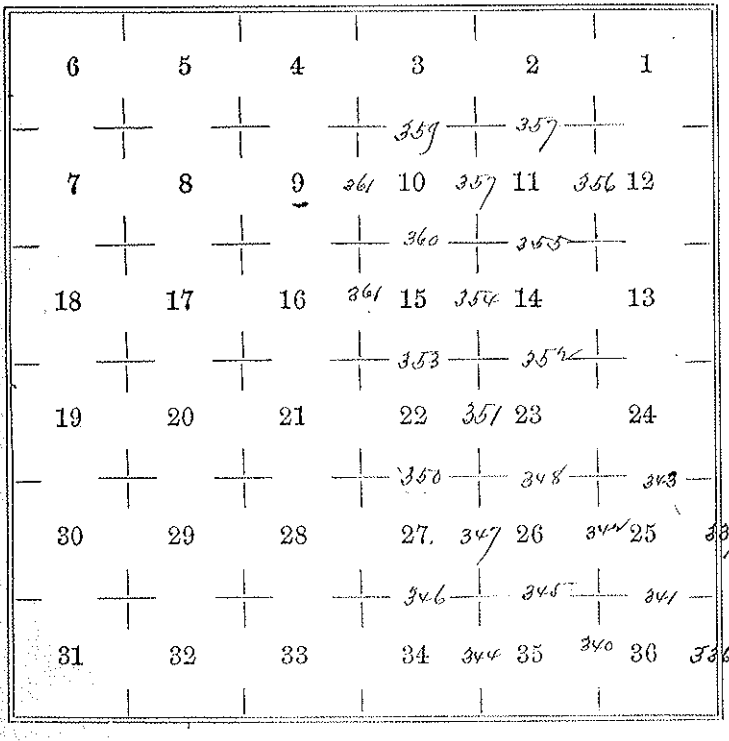

East Boundary Tp 2 R 2 5 W. Salt

Chains Feb 10th 1877 by J. Ar Bursill Chains

Commencing at a standard 2.30 N.
on 3 south Ranges 2 West and on 40.00 On
established by me on the 8th inst 10 x
North 1/4 sec. 31 & 36.
Var. 15° 30' E. Note: The

110.00 N.E. Standstone 16 x 8 x 4 in. 8 in. Blu
deep marked 1/4 on N. side 8 Ran
raised around Stone for 4 Tim
inches. Note: For

80.00 Pet Standstone 15 x 7 x 6 in. 8 in. pro
deep notched 1 on S. 1/4 on N. edge not
raised around Stone for cor Fe
1/4 sec. 25, 30, 31 & 36 -
Land generally level & plateau
soil Sandy
Timber & scattering Pine & Cedar

North 1/4 s. sec. 25 & 30

BOOK A-135

Salt Lake Meridian

237

Chains

Tn. 13 S. R. 30 E.

27.30 Descend

40.00 On N.W. slope of Sandstone 13 x 10 x 5 ins. Stn. deep mkd. T. 13 S. R. 30 E. S. 31 / 32 mound of stone for witness

Note: The line North falling into a brush Bluff. Discontinue. Chain pendulating. Soil Sandy Timber Pine & Cedar

Note: For General Description & approval see end of subdivisions notes of this Township.

Feb 10th 1877 J. C. Barrick U. S. Dep. Surveyor

BOOK-A-153

Field Notes
of the
Subdivisions of
Townships 2 South Range 5 West
Salt Lake Meridian
Utah Territory
as surveyed by
Bailey & Burrill
under joint contract of Bailey & Burrill
No. 73. - dated Sept 14th 1876

Survey commenced Feb 12th 1877
" completed " 12th "

Subdivisions T. 42 N. R. 5. W. 4th

Chains	Feb 12th 87 by J. C. Barnes
	Commences on S. bdy sec 35 & 36 on
	South boundary of the township
	North W. Cor. sec. 35 & 36
	Var. 15° 30' E.
30.60	Wood Road bears E 1/4 N.
10.00	Set Standstone 18x18x6 ins.
	ins. deposit subdivision No 1
	Raised mound of stone for 1/4 sec
43.00	Enter cañon flat & Meadows bears
53.50	Road bears E 1/4 N. 3 springs on S.
	Joans, bears meadow & cedar bull
80.00	Set Standstone 18x18x6 ins. 12 ins. d
	notched 1 on E & S. edges Raised M
	Stones for cor. sec. 25 26. 35 36
	from which
	Cedar 10 ins. dia. bears S. 10 E.
	Ths. dia. L. marked S. 36. 74 2S. R.
	Sand and adobe cañon along bears

BOOK-A-153

Salt Lake Meridian

Trans Pond Dale — No 9 Timbre —

East on random line
Int. secs. 25 & 36
Va. 15°. 30. E.

3.00 Enter canon flat bears N. E. 95. W.
1.50 Road " "
5.00 Enter Hills " "
2.00 Set limestone sec. cor.
.60 Intersect west boundary of Township cor. between secs. 25 & 36 from which
West on Base line
Int. secs. 25 & 36
.20 Set Sandstone 18 x 6 x 5 ins, 12 ins. deep, marked 1/4 on N. side with mound of earth from which
24 x 12 x 12 ins. for 1/4 sec. cor.
.10 The cor. between secs. 25, 26, 35 & 36
Land undulating, Soil Dale

Subdivision 1/4 2, T. 12, S. R. 5, W. Salt

6 chains Variation a few links East of Point.

North, Rec. 25.82.6
Bus. S. 30 E.

Record

35.00 Found Stone for 1/4 Sec. bears E&W.
further chaining on line brings
in practicable Point from here
Set Chained Cedar Post 4 ft 4 x 4 in. 40.00
12 in. deep marked 1/4 S. W. C. on N. side
Piled & raised mound of earth from
4 pits each 24 x 12 x 12 in. for witness
trees, viz: Thence West 57.00 chs. Note:
Thence North 60.00 chs. Thence
Should read 57.20 chains. East 57.00 chs. Thence S. 15.00 chs to
8.00 The true corner where I
Set Chained Cedar Post 4 ft 4 x 4
in. 12 in. deep marked 1/4 S. & 20
edges Raised mound of earth

Salt Lake Meridian

Chains From 1/4 sec. bears 24 x 12 x 12 ins. for cor.
Bet. secs. 23. 24. 25 & 26.
Land mostly broken along hills.
Soil 2nd & 3rd rate.
Timber - scattering Cedar & Pine

North, bet. secs. 23 & 24
Var. 15° 30' E.

40.00 Set Charred Cedar Post 4 x 4 x 4
ins. 12 ins. de. & marked 1/4 S. on W.
side Mound of earth from
1/4 sec. bears 24 x 12 x 12 ins. for 1/4 sec. cor.

Note: On account of the broken Bluffs
East & North I abandon line here -
Land broken. Soil 2nd rate -
Timber - scattering Pine & Cedar

From the cor. to secs. 34 & 35 on the
south boundary

Cor. Sections 34 & 35, T. 42 N., R. 6 E. 5 M.

Chains

Mar. Ch. Pt. Secs. 34 & 35

Var. 15° 30' E.

Pine pin, fd. a copping, ins. pnc. pnt. 8 chs. East of and
Iron bolt Magnetic & witness
cor. to Secs. 34 & 35 23.00 chs. S. of
Tree, cor. fd. mound, mans North on
offset line 80.00 chs. then West
12.00 chs. to point 11.00 chs. E. of
80.00 (The true cor. point) at foot of
Rock Bluff, bears N. 75° E.
Ret. Sandstone Metate 19x10x
5 ins. 12 ins. deep, notched 2 on S.
8 W.C.
& 1 on S. edge, raised mound of
stone for witness cor. to Secs. 26, 27,
34 & 35.
Sand broken along line
Rail 2 rails.
Timber - scattering Cedar & Pine

11.00
12.50
39.85
20.00
51.25
60.00
70.00
80.00
10.00

Salt Lake Meridian

Chains	
	East on random line
	bet. secs. 26 & 35
	Ca. 15°. 30. E.
11.00	Thence meander. along foot of Bluffs
	bear. N. 77 W. S. E. from beginning
12.50	Enter cañon of Cat.
39.85	Road bears N. W. & S. E.
40.00	Set temp. 1/4 sec. cor.
51.25	Enter Hills bear N. E. & S. W.
60.00	Head of Hollow draws N.
70.00	Ridge bears N. E. & S. W.
80.00	Intersect N. & S. line bet. cor. to
	secs. 26 & 35 from which
	Mot. on Three Lines
	bet. secs. 26 & 35
0.00	Set Sandstone 13 x 7 x 6 in. 8 in.
	deep marked 1/4 on N. side &
	raised mound of earth from
	4 pits each 24 x 12 x 12 in. for 1/4 sec. cor.

346.

Subdivision T. 44 N. R. 8 E. 5th P.M.

Sam. 1.00

Place of Beginning Cor. to secs. 26 & 27, 34 & 35.

Land undulating except in flat

Soil 1st & 2nd rate

Timber, Pine & Cedar in hills

Note. It being impracticable on account of the Potean ground to establish the line in the regular order thereof

I run

West on true line

bet. secs. 27 & 34

Va. 15° 30' E.

The line in place it being impracticable I offset from the witness cor. 11.00 chs. East from cor. point of secs. 26 & 27, 34 & 35. ~~XXXXX~~ North 40.00 chs. thence West 81.00 chs. thence South 40.00 chs. to

Sam. 40.00

Note.

0.00

Salt Lake Meridian 34

Chains

40.00 on line in place, Set Charred Cedar Post 48 x 4 x 4 in. 12 in. deep marked 1/4 S. on N. side & raised mound of earth from pit to east 24 x 12 x 12 in. for 1/4 sec. cor.

Note: On account of broken ground I abandon line here and undulating soil 1st to 2nd rate, Timber Cedar in hills

---

From the witness cor. to sec. 26. 27. 34 & 35 North, Rt. secs. 26 & 27 West 15. 30. E.

From the W.C. cor. 11.00 chs. East of true cor. North on offset line 40.00 chs. thence West 11.00 chs. to

0.00 on line in place set Post & Mound

Subdivision T. 42 N. R. 5. W.

4 chains	14 x 8 x 6 in. Stone deep marked S 4 on 4 chains	
	N. & E. raised mound of earth	80.20
	Iron Spike each 24 x 12 x 12 in. for	
	1/4 sec. cor. Thro. North line in place	
80.00	Set Sandstone 20 x 12 x 12 in. 15 in. deep	
	notched 2 on E & S. edges raised	140.00
	mound of earth Iron Spike each	
	24 x 12 x 12 in. for cor. to sec. 22, 23, 26, 27	
	Land level - Soil, Dale	
	No Timber	

	East on random line	80.20
	to T. 43 N. R. 5 W.	
	Var. 15° 30' E.	
15.70	Road Cross N & S.	
2.00	Foot of Hills bear N. E. & S. W.	
23.00	Foot of high hill perpendicular	Note:
	Ledge. Offset North 15.00 chs.	
	Thence East 57.20 chs. Thence	

Salt Lake Meridian

Brings South 5.00 chs. to

80.20 Intersect N.L. S. line of sec. to
23. 24. 25 & 26
secs, ~~2 3 2 6~~ from which
West cor. bears
Mt. secs. 23 & 26
40.00 falling pine broken ground can-
not be set thereon at 5/.20 chs
marked Ledger Sandstone
bears S. 88 E. 1/4 d W.C. Raised
mound of stone for witness
Ledger.

80.20 Fine cor to secs. 22. 23. 26 & 27.
Land on S.L. Land in hills broken
Soil 1st Rate 2nd Rate
Timber Scattering Cedar in hills

Note: It being impracticable to
establish the line Mt. secs.
22 & 27 in the regular order

350

Subdivision of Sec. 2, T. 42 N., R. 5 W. Sal

Chains			Chains
	Thence from the cor. to Secs. 2, 23, 26 & 35,		
	West on true line		40.00
	bet. Secs. 2 & 35,		
	Var. 15° 30' E.		
11.00	Pool of high water bears N. & E.		58.00
10.00	Falling on broken ground		73.00
	cannot dig pit. Therefrom		
	11.00 chs. marked ledge of		80.00
	sandstone, 30 feet high, bears		
	N. & S. ¼ W. C. for witness ¼ sec.		
Note:	I abandon line here.		
	Land level & broken		
	Soil 3rd rate.		
	Timber - scattering Pine		
	& Cedar on hills.		
	From the cor. to Secs. 2 & 35		

Salt Lake Meridian

Chains North bet. secs. 22 & 23
On. 15°. 30'. E.

40.00 Q. t. Sandstone 20 x 10 x 3 1/2 in. 18 in. dep. marked 1/4 on N. side raised mound of earth from 4 pits each 24 x 12 x 12 in. for 4 witness.

58.00 Road bears N. 5° W. 95. 10°. E.

73.00 Most N. point of perpendicular ledge, 7 ft. E. East trends N.E. & S.E.

80.00 Set Sandstone 15 x 10 x 4 in. 10 in. dep. notched 2 on E & S. edges raised mound of earth from 4 pits each 24 x 12 x 12 in. for cor. to secs. 14. 15. 22 & 23
Land level, fair. Soil 1st rate.
No Timber.
Feb 12th 1877 J. C. Burrill
" 12th 1877 by T. C. Bailey
The cor. to secs. 13. 14. 23 & 24. not being established in account

35

Subdivisions N½ N.E. 02. S. 11. Sale

Chains of mountains thereafter Drum Chains
Eastern base line
Art. Occ. 11472
Wn. 15° 30 E.

1.36 Feet of Bluff, bank E. 0.5. E.
40.00 Falls in Bluffs cumul. basis 2.30
thereafter 1.36 chs. marked 35.00
ledge of sandstone 100 feet 40.00
high in W.C. for 11 lines in succession.
Note: Abandon line here.
Land mostly mountainous
Soil, poor
Timber pea, limpy, cedar
in mountains.

It being impracticable
on account of the mountains
to establish the line Art. Occ.
15422 in the regular order

Salt Lake Meridian

Chains

Thence for 1st Mon. cor. Secs.
14. 15. 22 & 23. Same
Prot on Three Lines.
Init. Secs. 15 & 22
Un. 15. 30. L.
2.30 Road bears N & S.
35.00 Foot of Hills bear N & S.
40.00 Falling in Bluffs, cannot
be set. Thence for 35.00 chs.
set Sandstone 14 x 6 x 6 ins 9 ins.
deep marked 1/4 on N. side of
W.C. Mound mound South
pour set in each 3 1/4 x 12 x 12 ins. for
witness 1/4 section.
Land mostly level
Hills Bare. No Timber

From the cor. Secs. 14. 15. 22 & 23
North Init. Secs. 14 & 15

Subdivision 1 to 2. N. to S. E. W.

Chains		Chains
	Cor. 15. 30. E.	
22.50	Road from N.E. to S.W.	
40.00	Pt. Sandstone 16×8×11 in. in ground, scribed, from which bears N. 30 E. 1.30 links, raised mound of earth from 4 pits, each 24×12×12 in. for 4 bearings.	30.00
		40.00
80.00	Pt. Sandstone 24×16×6 in. in ground, 1 bearing tree, notched 2 on E. side, 4 on S. edge, raised mound of earth from 4 pits each 24×12×12 in.	80.00
	for cor. to sec. 10. 11. 14 & 15.	
	Rand mostly level.	
	Soil, Water -	
	No Timber -	

The cor. to secs. 11. 12. 13 & 14 not having been established in the regular order on account

Salt Lake Meridian

Chains

of the mountains I therefore run
East on true line
bet. secs. 11 & 14
Var. 15° 30' E.

21.30 Road, bears N. & S.

30.00 Foot of Hills, bar. N. E. & S. W.

40.00 Set Sandstone 12 x 8 x 6 ins. 8 ins.
deep, marked 1/4 on N. side &
raised mound of stone for 1/4
sec. cor.

80.00 Set Charred Cedar Post
4 x 4 x 44 ins. 12 ins. deep, marked
1 notch on E. & 4 on S. sides, raised
mound of earth from 4 pits, each
24 x 12 x 12 ins. for cor. to secs. 11, 12, 13 & 14
Sandy Level & undulating.
Soil 2nd rate.
Timber scattering Pine & Cedar

Subdivision T. 42 S. R. 5 W. Salt

4 Chains	North, Bet. secs. 11 & 12	Chains
	Va. 15° 30' E.,	30.00
40.00	Set, Charred Cedar Post 48"	40.00
	4 x 4 in. 12 in. deep marked 1/4	
	S. on W. side raised mound	
	of earth pounded each 24 x 12	
	x 12 in. for 1/4 sec. cor.	
40.75	Quarter chains S.	80.00
39.50	" " "	
79.00	Set Charred Cedar Post 48"	
	4 x 4 x 4 in. 12 in. deep marked	
	1 notch on E & S sides raised	
	mound of earth pounded 24 x 12 x 12 in. for cor to sec. 1. 12. 11 W.	
	Land rolling, Soil Dark	
	Timber scattering Pine & Cedar	

From cor to secs. 10. 11. 14 & 15

North, Bet. secs. 10 & 11

Chains	
	Van. 15°30. E.
35.00	Foot of Hill, bears N. E., 95 N.
40.00	Pile, Shaved Cedar Post 4x4x4 ins. 12 ins. deep, on marked 1/4 S. on N. side, Mound of earth, pits 4 ins. each 24x12x12 ins. for 1/4 sec. cor.
80.00	Pile, Shaved Cedar Post 4x4x4 ins. 12 ins. deep, marked 2 notches on E. & W. sides, Mound of earth, pits 4 ins. each 24x12x12 ins. for cor. to sec. 2, 3, 10 & 11
	Land rolling & level.
	Soil 1st & 2nd rate.
	Timber, scattering Pine & Cedar

East on random line
Art. to sec. 2 & 11
Van. 15°30. E.

Subdivisions T. 11 S., R. 2 E., S. M. Salt

Chains		
14.00	Enter Salt Lake Base & S.	Chains
28.00	Road Base & S.	
33.25	Center Hills Base & S.	
40.00	Set Bench Mark.	
0.00	Intersect & S. line 35 lks.	
	of cor. to sec. 2, 11 S., 12 E. from which 29.00	
	~~Pine 8" diam. 35° E.~~ 40.00 on this line.	
	Sub. sec. 2 N.E.	
40.25	Set Charred Cedar Post 4 x 4 x 4 ft.	
	12 in. deep marked T. 1 S. on N. side to;	
	raised mound of earth from	
	pit 1 each 2 x 12 x 12 in. for sec. cor.	
80.50	The cor. to sec. 2, 3, 10 & 11.	
	Land mostly rolling	Note:
	Soil & Rocks	
	Timber: Scattering Pine & Cedar.	

Note: The cor. to sec. 3, 4, 9 & 10 falling in the mountains with notch

BOOK-A-153

Salt Lake Meridian 869

Chains set Pine for Sec. cor. to
2.3.1911
secs. 3 & 10

West on true line

bet. secs. 3 & 10

Va. 15° 30' E.

29.00 Foot of S Bluff to bear S. E. 75 N.

40.00 Set Pine stone 11x10x8 in. pin. drill
marked from which a Pine 8 inch mound
of stone for 1/4 sec. cor.

Note: I abandon lines here -
Land rolling - Soil & Rocks -
No Timber -

Note: The cor. to secs. 9, 10, 15 & 16 not
being established in the regular
order on account of the mountains
10.11.14 & 15
There for from the cor. to secs. 10 & 15
I run
West on true line

Subdivisions T. 42 N. R. 5 W. 4th

Chains	Ord. Desc. 10 & 16
	W. 1/4 S. 30. E.
0.15	Gully, Chains N.
12.00	Foot of Hill, from N. E. & S. W.
105.00	Further chaining on line being impracticable I have set Sandstone 11x10x6 in. 9 in. deep marked 1/4 on N. side & W. S. Raised mound of stone for 40.00 witness pr. decision. Thence E. 20.00 chs. Thence North 80.00 chs. Thence West 65.00 chs. Thence North 80.00 chs. to
80.00	The true cor. found. Ord. Sandstone 11x11x7 in. 7 in. above mitched 3 sides & one S. edge for cor. Desc. 9.10.13 & 16. Land mostly rolling - Soil 2nd Rate.

Chains

Chains | No Pinches

The cor. to sec. 15, 16, 21 & 22
not being established
therefrom from the cor. to sec.
9, 10, 15 & 16
North bet. secs. 15 & 16
Va. 15° 30' E.

40.00 Set Sandstone 11 x 11 x 5 ins. pits
deep marked 1/4 on N. side Witness
mound 2 stones for 1/4 sec. cor.

Note: I abandon lines here -
Land nothing - Bill & Date
No Timber -

From the cor. to secs. 9, 10, 15 &
16 I run
North bet. secs. 9 & 10.
Va. 15° 30' E.

1967

Examination T. 12 S. R. 82 E. 5th P.M.

Chains

40.00 W. foot of Wheeler Bluffs bears N. E. 1/4 S. W. dist. Sandstone 18x18 x 7 ins. Inscribed on W. side & raised mound of stone 2 ft. diam. 2 ft. high.

Note: Salt and sandstone here. Sandmostly rolling Soil 2nd rate, No timber. Feb 12th 1877 T. B. Bailey

General Description.

The surveyed portion of this township consists mostly of 1st class range bottom & meadow lands.

Those lying on sec. 35 are mostly claimed by various settlers.

T. B. Bailey
U. S. Dep. Surveyor

BOOK-A-153

368

U. S. SURVEYOR GENERAL'S OFFICE,

Salt Lake City, Utah, June 21st 1877

The foregoing field notes of the survey of the Extensions & Subdivisions of Township No. 42 S. Range No. 3 West Executed by Bailey & Barnes Under Joint contract of the 4th day of September 1876, in the month of February 1877, having been critically examined, the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

Nathan Kimball

Surveyor General for Utah.

BOOK-A-153

3

367

Examined by C. H. Cramwell. C. C.

Field Notes

of the

Exterior North Boundary

Townships 1 & 2 South Ranges 10 West

Salt Lake Meridian

Utah Territory

as surveyed by

J. G. Burrill

under Joint Contract Bailey & Burrill

No. 13 - dated Sept 4th 1876

Survey commenced Mar. 26th 1877

" completed " " "

BOOK-A-153

367A

Township 42 South **R.** 10, West

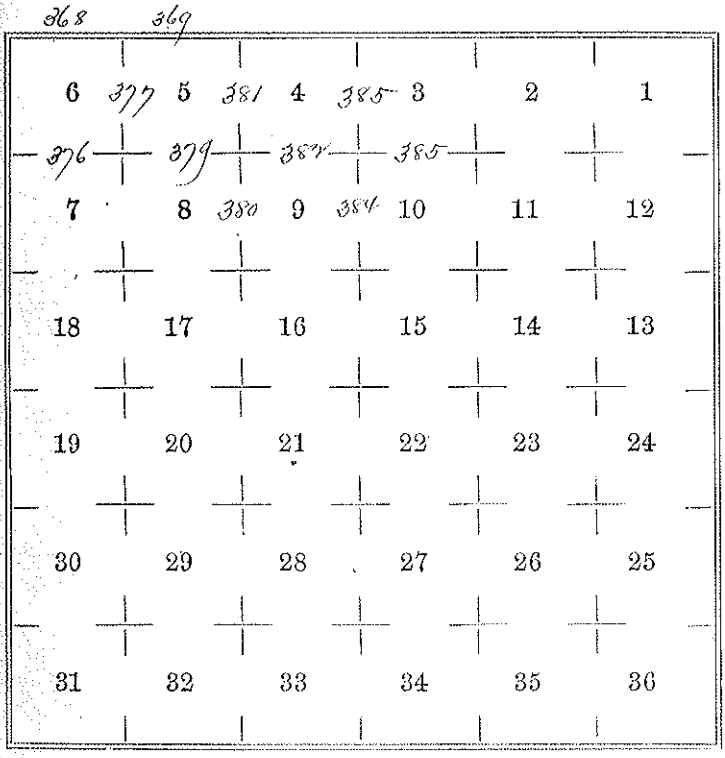

North Boundary T. 44 S. R. 6 W. 10th Dal

Chains	March 26th 1877 by J. G. Burrill Chains
	Surveyor to T. 44 S. R. 6 W. 10th M.
	Mobbing established Iron
	Post Mound
	Set. pcs. 1831
	Va. 16° 00' E.
Note:	The lines in place being impracticable on account of mountains Thence from this witness cor. situated 37.00 chs. S. of the cor. to T. 44 S. R. 6 W. 10th M. S. 42° S. 82 1/2 W. Measured 19.20 chs. Thence S. 76° 15' E. 25.00 10.00 Thence N. 78° E. 10.00 chs. Thence E. 15.00 chs. Thence N. 9.00 chs. Thence 12.00 E. 5.50 chs. Thence S. 77° 30' E. 46 15.20 chs. Thence N. 45.50 chs. to a 18.50 point 10.00 chs. E. of
10.00	Thence Post Standstone 15 x 15 20.00
	ins. 10 ins. deep mound Set 5 Notches 40.00

Salt Lake Meridian

Chains | Cor. to Secs. 1 & 12 on T. 1 S. R. 2 W. U. C. raised mound of stone for witness cor. Secs. 5, 6, 31 & 32

Note: The Sec. cor. falling in the mountains is not set. Land on line in place mountainous. Soil 2nd rate. Timber, Pine & Cedar in mountains.

East on true line. Art. Secs. 5 & 32

Va. 16° E.

10.00 The witness cor. to Secs. 5, 6, 31 & 32 on north boundary.

12.00 Road bears N 45° E.

15.20 Ditch drains S.

18.50 North Fork of Rio Virgin 50 lks. wide 12 in. deep runs South.

30.00 Foot of steep mountains bears N 45° E.

40.00 Falling in ledge & brake, cannot

North 2 Boundary 1842. A. M. 10 p. vol

Chains. Brass Cap Set at Note:

25.00 chs. set Pond Stone 18x12

ins. 12 ins. deep mark'd Cpos.

N. side & W. C. Mound

& Stone for witness ¼ sec. cor.

To west Bohon Oak 25.00 chs. Thence South

10.00 chs. Thence East 55.00

chs. Thence North 10.00 chs. to

80.00 The true cor. Joint set Pond-

Stone 10x10x7 ins. 6 ins. above ground

mark'd 1 on E & 2 on W. edges & mound

of Stone for cor. Sec. 11. S. 2 & 3 R. 2 W.

Land broken & marshy

Level & Soft

Soil 1st & 2d rate.

Timber. Pine & Cedar in marshes.

Note: Declination Line here

March 26th 1877 J. G. Burrill

BOOK-A-153

Salt Lake Meridian 8/1

Note: For General Descriptions &
Approved Plat and Survey
see Index of the Township.

BOOK-A-153

14

375

Examined by C. H. Cramwell. C. C.

Field Notes
of the
Subdivisions of
Township 5 South of Range 10 West,
Salt Lake Meridian
Utah Territory
as surveyed by
F. C. Bailey
under joint contract Bailey & Burrill
No. 73 — dated Sept 8th 1876

Survey commenced March 26th 1877
" completed " " "

Subdivision Bk 2. p. 11. 10. 12. Salt

Chains. Mch. 26th 1877, T. C. Bailey, Chains
Note: No person having ...
made of the E & S. parts of this
Township thereof I ...
East on the ...
Ist. acon. 6/7
Va. 16° 0 E.
Note: The line in places being im-
practicable on account of
mountains therefor I measure
North 23.30 chs. Thence S. 76. 15 E.
23.70 chs. Thence N. 78° E 40.00 chs.
Thence E. 15.70 chs. Thence S. 8.00 21.81
chs. to a point 1.51 chs. N. of 25.31
80.00 the cor. point & thence S. 6.78 W. ...
I marked a sandstone in place 29.40
24 x 24 x 20 in. above ground 5 notches
on E & S. edge I XX. C. I mound mound 35.40
Stones for witness cor. Rod cor. S. 6. 78. 35.50
Note: This Iron acc. cor. falling in the 37.50

BOOK-A-153

Salt Lake Meridian

Chains	
	mountains is not set
	Land level and bottom
	Soil 1st rate
	No Timber —
	North on random line
	Bet. secs. 5 & 6
	Var. 16.00 E.
17.50	The witness por. to sec. 5. 6. 7 & 8 on
	S. sides of Truckee Rock mountains
	bears S. W. Enter cultivated field —
21.81	Fence bears E. & W. Rear field.
25.31	Rio Virgin 150 lks wide 10 in. deep runs S. E.
29.40	Fence bears N. E. & S. W. Enter cultivated field
33.40	Fence bears S. & W. Enter Street
35.50	Ditch drains W.
37.50	Foot of Bluffs, bears N. & S. W.

Subdivision of T. 12 S. R. 10 W.

6 Chains	Runs East 5.50 chs. Runs	6 chains
	S. 77.30. E. 4.60 chs. Runs N.	
	4.50 chs. to a point 10.00 chs	Note 1
	East of	
80.00	Intersect N. boundary of Section	
	No. 36 on Base Line. 386 from which	
	South on true line with offsets	
	Rd. Bears. S. 4 E.	
140.00	Falling in mountains can-	
	not Chain, therefore at	
42.50	Distance in place set Stone	80.00
	Stone 15 x 10 x 6 in. 10 ins. deep marked	
	I. N. C. on North West Corner	
	of Section No. 4 Sec. Cor.	
80.00	Sec. Cor. Bears. S. E. 1/4	
	Land broken & Hilly	
	Soil Dale — No Timber	Note 2

Note 1: This Cor. Sec. 4, 5, 8 & 9 not being set. Runs
East on true line

Chains

6 chs. secs. 5 & 8
Ca. 16° E.

Note:

The line on this plane being impracticable therefrom from the witness cor. 1.51 chs. N. of true cor. found & secs. 5.6. / 8 I measure N. 7.99 chs. thence E. 5.00 chs. on S. side of Northup lane (3 houses on N. side & 1 on S. side) thence S. 17° 30' E. 16.00 chs. thence E. 0.30 chs. thence S. 19.05 chs. to

80.00

The true cor. found marked sandstone in place 18x12x7 set above ground with a cross 6 / 1 & 2 on found 2 notches on E & S on S. edges raised mound of stones on top of same for cor. to secs. 4. 5. 8 & 9.

Note:

The fence cor. falling in the mountains is not used.
Land in bottom level
Soil & Vals.

Subdivision T. 32 S., R. 10 W.

Chains	Timber, Cedar & Pine in mountains	Chains
		8.50
	North 1/4 Sec. 8 & 9	14.25
	Va. 16° 0' E.	
Note:	Being impracticable to chain this line I measured a base of 40.00 chs. E. & established 1/4 sec. cor. by triangulation by driving in a stake from both ends of base simultaneously, my angle at E. end of base being 45°	30.00
		31.00
40.00	Set Sandstone 13x10x5 ins. 8 ins. deep marked 1/4 N. side raised mound of stone for 1/4 sec. cor.	80.00
Note:	I abandon this line	
	Land mountainous Soil 2nd rate	40.00
	Timber scattering Pine & Cedar	
	From the cor. to Secs. 4, 5, 8 & 9 North on random line 40 chs. Sec. cor. 4 & 5	80.00

Salt Lake Meridian

Chains	
	On 16th E.
8.50	Ravine runs N.W.
14.25	East Fork Rio Virgen 50 lks wide 12 in. deep runs N.W.
30.00	Road bears S.E. & westerly
31.00	Foot of mountains, further chaining on line being impracticable I measure S. 11. 95 chs. thence N. 77.30 W. 56.34 chs. thence N. 38.76 chs. thence E. 55.00 chs. thence N. 10.00 chs. to
80.00	Intersect N. boundary at cor. to secs. 4 & 5 from which South on true line 80. 00 cor. secs. 4 & 5
40.00	Falling in bluff, breaks not said thence run at 49 chains I Dig Sandstone 18 + 10 + 6 ins. 12 in. deep marked I on W. side & VI. C. with witness raised mound & stone for 1/4 sec. cor.
80.00	Thence E. secs. 4. 5. 8 & 9

Subdivision T. 42. S. R. 10. W. Salt

		Chains
Adams	Land level in bottom mostly mountainous, hilly & dale	54.50
	Timber Pine & Cedar in mountains	58.00

Also:	Timber, Secs. 3. 4. 9 & 10 not	62.50
	Survey'd Spring	63.00
	Eastern Base line	64.30
	Int. Secs. 4 & 9	66.00
	Var. 16° E.	66.50
2.00	Ravine drains N.W.	69.25
5.60	Wood Road, bears N.W. & S.E.	70.50
24.50	Rock walled Spring 100 lks. S.	74.50
	of line runs N.	76.50
25.50	Spring Branch runs N.	80.00
40.00	Set Sandstone 20 x 10 x 4 in. 18 in. deep marked 1/4 M. S. & W. raised mound & stone for 1/4 sec. cor. from which a Cedar 10 in. dia. bears N. 20° E. 1.50 chs.	

Salt Lake Meridian

Chains	
54.50	Rio Virgen 60 lks. wide 10 in. deep runs N.W.
58.00	Fence bears N 85 E. enters Orchards & Shonesburg settlement
62.50	Fence bears N.W & S.E.
63.00	S.W. cor. of Cabin on line
64.50	Fence bears N.W & S.E.
66.00	" " " "
66.50	Cabin 1.50 chs. N. of line
69.25	Fence bears N 26° W & S 26° E. enters street
70.50	" " " " " " Orchard
74.50	" " " "
76.50	" " " "
80.00	On N. side of Rio Virgen set Sandstone 12 x 9 x 6 ins. 8 ins. deep mitched 30 W 68 S on S. edges Traverse mound of stones for cor. Brass 3.1.9810 Sandstone blend, Soil, Pale Timber Cedar, Brush Cedar in hills

Subdivision, T. 42 S., R. 10 W. Salt

Chains		Chains
	Smith Bro's. pre., 1910	
	Ch. 10.00 L.	
0.20	N. Bo Virgen 50 lks. wide 10 lks. deep runs N.	
1.75	Cultivated field.	1.26
9.10	Small Brook 8 lks. wide 6 lks. deep runs N.	9.20
		10.50
8.00	Fence Bears S. & W.	23.00
8.50	Foot of Bluff Bears S. & W.	40.00
40.00	Falling in Bluff to Creek	
	Thence N. 8.50 lks. to Sandstone 20 x 12 x 5 in. 15 in. deep Marked	
	S. on N. side W.C. for witness pre.	
	cor.	Note.
Note:	Abandon line here	
	Land in bottom level	
	Soil, Sale	
	Similar Pine & Cedar in mountains	

The cor. bet. 34 & 35 on S. Boundary is not
Stone pile 3 Pines

BOOK-A-153

Salt Lake Meridian

Chains	North on true line
	Sec. cor. 3 11
	Var. 15° E.
1.26	Juncture Rock N. & S. N.
9.20	" " N.W. W.S.E.
10.50	" cor. " N.E. & S.E.
23.00	Enter broken ridges
44.00	Marked sandstone in place 3×3
	x. fall about sound at foot of
	precipitous bluffs, Juncture N.E.
	W.S.W. fm. cor. N. side Basin mound
	8 poles for fm. sec. cor.
Note.	Down the main line.
	Sand, sand in bottom, Pine Butts
	to Summit

Thence W. 2 sec. 2, 3, 10 11 mo. to
bring set Stone
Easton true line
E.E. sec. 3 10

Sub division, T. 12. S. R. 10. W.

Chains		Notes:
0.10	Fence runs N.W. & S.E.	
3.00	" " " "	
5.50	" " " "	
6.00	" " " "	
6.50	Rio Virgen 50 lks. wide 10 lks. deep runs S.	
9.50	" " " " " " " " " N.	
15.50	" " " " " " " " " S.E.	
19.25	" " " " " " " " " N.W.	
22.50	Fence runs N.E. & S.W.	
24.75	Rio Virgen 50 lks. wide 10 lks. deep runs S.W.	
38.50	Foot of Bluffs runs N.W. & S.E.	
40.00	Falling in Bluffs not set	
	therefor at 28.50 chs. set a	
	Sandstone 28 x 16 x 10 ins. 20 ins. deep	
	marked 1/4 W. C. on N. side Bears	
	mound 2 stones for witness 1/4 sec. cor.	
Note:	Da Bäum dem Lines here	
	Land level in bottom Dirt Bats.	
	Timber Pines & Cedar in Mountains.	

BUOY-A-155

Salt Lake Meridian

38

Note: Further survey being impracticable on account of mountains I abandon line here.—

General Description

The surveyed portion of this Township embraces the cultivated bottoms of both forks of the Rio Virgen mostly planted with fruit trees vines & Alfalfa all growing luxuriantly — Sec. 5 contains the small settlement of Northup

Sec. 14 the Langston & Pheasant —

The land is agricultural

March 26th 1877. T. C. Bailey

U. S. Dep. Surveyor

BOOK-A-153

389

U. S. SURVEYOR GENERAL'S OFFICE,

Salt Lake City, Utah, June 6th 1877

The foregoing field notes of the survey of the (Eastern) 4th Boundary & Subdivisions Township No. 42 S Range No. 10 West Executed by Bailey & Burrill Under first contract of the 4th day of September 1876, in the month of March 1877, having been critically examined, the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

Saltan Kimball

Surveyor General for Utah.

BOOK-A-153 15 393

Examined by C. M. Bramwell. C. S.

Field Notes

of

The Survey of the

North & East Boundaries

of

Township 42 S. R 11 West.

of

The Salt Lake Meridian

Utah Territory,

By

J. G. Bunnell

Under Joint Contract of Bailey & Bunnell

No. 73 dated Sept. 4th 1876.

Survey Commenced March. 24. 77

" Completed " " "

394

BOOK-A-153

Township 112 South **R.** 11 West

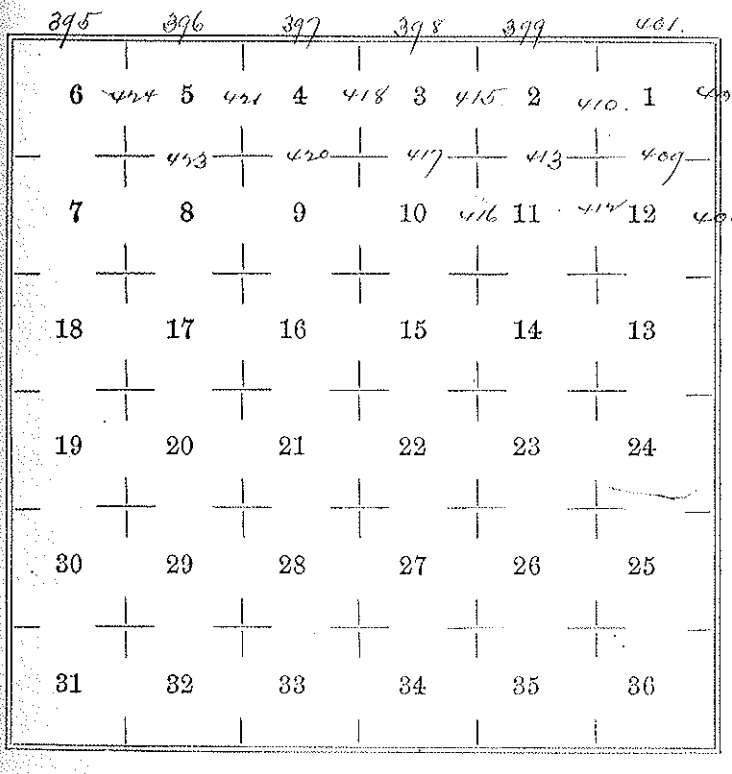

North Dakota Sheet No. 11

Salt Lake Meridian

Chains

Notes for Tps. 112 & 113 N., Rs. 101 & 102 W., 5th P.M., not being Set, Unsurveyed, From the Missouri River Eastward 25 chs. 6 lks. On Guide, to Tps. 111 & 112 N., Rs. 101 & 102 W., 5th P.M.,

East on base line

Between Secs. 6 & 31,

Tan. 16° E.

25,00 The Missouri River,

25,50 Wash Creek, N.E.

40,00 Set Gypsum 16 x 10 x 8 in. 11 in deep, marked Y on N. side Trained mound of Gypsum for Sec. Cor.

45,50 Road bears N.E. & S.W., Wash Creek N.E.

56,40 Low ridge bears N. & S.,

65,25 " " " "

North boundary Th. 12 S. R 11 W.

Chains.		Chains.
41,50	Stake & mounds North,	62,50
80,00	Set limestone 16x12x6in, 18in	64,00
	deep, 2 stones 1 E, 1 S 24,	
	scribed mound of stones for	72,00
	Cor. to Secs. 5, 6, 31 & 32,	
	Land undulating,	80,00
	Soil 2nd rate,	
	Timber, Scattering pine & Cedar,	

East on base line

Between Secs. 5 & 32,

Var. 16° E.

40,00	Set Gypsum 14x12x4in,	
	Pits, chips, marked Y on E side,	
	scribed mound of Gypsum for	
	1/4 Sec. Cor.	
113,50	Road bears N.W. & S.E.	
53,50	Point of Creek bears S.E. & S.W.	
60,00	" " " " " "	

Salt Lake Meridian.

Chains.	
62,50	Latch runs N. E.
65,00	Rio, Virgin 100 lks wide 15 in.
	deep, runs S. W.
72,00	Rio Virgin 150 lks wide 15 in. deep,
	runs S. W.
80,00	Set quadstone 12 x 10 x 24 in. long,
	deep, notched 4 on E. & 2 on W.
	edges, & mound of stones
	for Cor. to Secs. 11, 12, 13 & 14,
	Land mostly level,
	Soil 1st rate,
	No timber.

Ent on Page One Hundred.

Secs. 11 & 14,

Twp. 16 S. R.

Lines in field unfavorable in

Account of mountains.

Bearings Irons,

Survey of 2 S. R. 11 W.

Chains. North 50 chs. thence S. 37½ E. 30,00 chs. thence S. 72½ E. 15 chs. thence S. 69½° E. 15 chs. thence S. 69° E. 31 chs. thence East 11. 50 chs. thence North 25,50 chs. to

Dollars. The Corporation Set a Line= $80,00
Post 30 x 16 x 10 in 18 in. deep.
Witness Cor. E. 1/4 Bridges, 5
marked Mound of Stones for
Cor. to Secs. 3, 4, 33 & 34
Spike Thick Sec. Cor. falling in
inaccessible Mountains & rocks
Sand in bottom Level
Soil Loam
No Timber.

East on true Line between
Secs. 3 & 34.

South Lake Meridian

Sec. 16° E.

Note, Line in place, falling
mostly in Mountains, Chainers
Object South, 80, 00 chs, thence
East 80, 00 chs, thence North 2,50
Chs, to a point, 37, 62 chs, South of,
80,00 The cor, pos. where I marked
a Stationary Cobble stone 2 ft × 12
× 8 in, notched 2 on E, & 4 on N,
edges N W & E rounded mounds
of stones, for Witness corner to
Secs, 2, 3, 9, & 35,
Conglomerate Bluffs bear E, 8.00 Ch.
Sands in bottom land,
Soil Poor,
No timber,

East on true line
between Secs, 2 & 35,
Va. 16° E.

1400

North Carolina Wayne Co. 2, 11 Pl.

Chains Sobe Lane in Glen Craig Chains
Supposed to be a Continuation
of Mountain Chain from
the Pilots on 39, 62 Chs.
Each of Corner Pine Tree
N. 32 1/2 E. Some East
Corner Chs. Chain East 39, 62
Chs. Chain East 2 in. Chs. to
80,00 Tree on point, Sobe Lane
from Mouth for Further
Noted Line 6 Chs 5 on Pl.
Chain Branch more or
Less Course for Corner Tree
N. 2, 35 E.
Noted Sobe Pl Tree Corner
Running in Mountain 63
Not set,
Sand Mountain, broken
Soil Pine
Timber, Scattering Cedar

80,00

Adams

East on true line
between Secs, 1 & 36,
Var, 16° E,
Note; Line impracticable on account of broken Country, therefore I offset 58.75 chs, S, thence E, 32.90 chs, thence N. 84½° E, 47.14 chs, (the last two Courses pass along S. side of Main Street in Rockville Settlement, containing 50 houses situated on both sides of the Street as plotted) thence N. 19. 20 chs, to a point 37.50 chs, S. of
80.00 the true corner point, at foot of bluffs, brass N.E. & S.W. marked a smooth face on ledge of sandrock,

East Boundary 4th. 42 S. R. 11 W.

Chains,	6 notches in square to the	Chains,
	N. S. E. & W. & W. C. for	41,00
	Witness Cor. to 4th. 42	
	S. Rs. 10 & 11 W.	
	Note; The 1/4 Sec. Cor.	52,00
	falling in broken ground	57,70
	is not set,	58,10
	Land broken,	
	Soil 2nd rate,	70,00
	Timber, Scattering Cedar,	
		71,70
	Note; As the S. E. Cor.	
	of this 4th. is not set	74,90
	therefore I run,	
	East between Secs.	79,70
	1 & 6,	
	Var. 16° E.	
57,50	The Witness corner my	80,90
	starting point,	

Salt Lake Meridian

Chains	
40,00	Set Sandstone 25 x 20 x 10 in, 18 in. deep, marked 1/4 on W. side & raised mound of stones for 1/4 Sec. Cor,
52,00	Grave yard 3 chs, E,
57,70	Road bears E, & W,
58,10	Fence bears E, & W. Creek runs W, enter field,
70,00	Fence at foot of river bluff, bears E. & W. bears cultivated field,
71,70	Rio Virgin 75 lks. wide runs W,
74,70	Fence bears E, & W. enter cultivated land,
79,70	Foot of inaccessible bluff bears N. 70 E, & N. 70 W,
	End of cultivated land,
80,00	Falls in bluff, cannot be set, therefore at 79.70

East Boundary T. 1 S. 42 S. R. 11 W.

Chs, Set a Sandstone
18 x 10 x 3 in, 12 in, deep,
Notched 1 on N, ▽ 5 on
S, Edges, with W.C. ▽ raised mound
of stones for witness Cor, to Secs,
1. 6. 7 & 12.
Land in bottom level,
Soil 1st rate,
No timber,

Chs,

South between
Secs. 7 & 12.
Var. 16° E.
Note; On account of Bluffs,
from Witness Corner, to Secs,
1. 6. 7 & 12, I offset 10 chs,
W, thence S. 40,30 chs, thence
E, 10 chs, to,
40,00 In place, Set a Sandstone

Salt Lake Meridian.

Chs, 12, x10 x 4in, 7in, dug,
marked 1/4 on N. side,
Pyramid mound of stones
for 1/4 Sec Cor,
Note; Meander Line Here,
Land broken,
Soil, 2d Rate,
Timber, Scattering Cedar,
March 24th 1877 J. S. Burrill

Note;
For General Description
& Approval see end of
Subdivision Notes of this
Ps,

BOOK-A-155

Examined by C.H. Cranmer C.S.

Field Notes

of

the Survey of the

Subdivision Lines

of

Tp. 42 S. R. 11 W.

of

the Salt Lake Meridian

Utah Territory

By

T.C. Bailey

Under Joint Contract of Bailey & Burrill

No. 73 dated Sept. 4th 1876

Survey commenced March 24. 77

" Completed, " " "

Subdivisions of Sec. 12, T. 4 S., R. 11 W., Salt Lake Meridian. 409

March 24th 1877

by T. C. Bailey

Note: As the S. E. part of this Dep. lies in Mountains and is not Surveyed, therefore from the W. Cor. 30 lks N. of Cor. to Secs. 1, 6, 7 & 12, on E. boundary,

West on true line between Secs. 1 & 12, Var. 16° E.

Note: On Account of bluff point & Quicksand bottom 78.12
from the Witness Cor. 30 lks N. & 67 links cor. to sec. 1.6
of mour, I offset N. 19.70
Chs, thence W. 140 chs. to Same 9.20 chs.
40.00 On line in places, Set a Sandstone 40 x 8 x 5 in, 30 in. deep, marked 1/4 on N. side & mound of stones for 1/4 Sec. Cor.

Subdivisions, Tp. 42 S. R. 11 W.

Chains, 80,00	thence N. 20 chs, thence W. 40 chs, thence S. 20 chs, to place, Set a Sandstone 28×22×14 ins, 21 ins, deep, Notched 1 on E, 3 on S, Edges, round mound of Stones for Cor, to Secs, 1, 2, 11 & 12, Land mostly mix bottom Soil 1st rate, No Timber,	Chains 2,05 2,65 2,00 80,00
	North, on random line between Secs, 1 & 2, Var, 16° E,	40,00
0,05	Rio, Virgen 200 lks, wide 15 ins, deep, runs N.W,	
3,00	Road bears E & W,	
4,50	Fence bears E & W,	

Salt Lake Meridian,

Chains	Enter cultivated land,
21,05	Fence bears E, & W, enter
	Street, bears E, & W,
21,65	Telegraph line bears E, & W,
23,00	Foot of bluffs bears E, & W.
	Here offset 20 chs. W, thence
	N, 5 chs, thence E, 20 chs,
	to,
80,00	in plain, Intersect North
	boundary of Tp, at Cor, to
	Secs, 1 & 2 from which,
	S, on true line with Offsets
	between Secs, 1 & 2,
4,00	In broken ground not
	set, therefore at 5 chs,
	Set a Sandstone 24 x 8 x 4 in
	18 in, deep, marked 1/4 2 W, C
	on W, side, & raised mound
	of stones for Witness 1/4 Sec,
	Cor,

Subdivisions, Tp. 42. S. R. 11 W.

Chains			
80,00	The cor. to Secs. 1, 2, 11, & 12,		
	Land level in bottoms,		
	broken in mountains,		
	Soil 1st rate,		
	Timber, Scattering		
	Cedar in Mountains,		
	Note; As the cor. to Secs,		
	11, 12, 13 & 14 is not set,		
	therefore from the cor,		
	to Secs, 1, 2, 11 & 12,		
	South between		
	Secs, 11 & 12,		
	Var, 16° E,	7,50	
15,10	Foot of bluffs, bear E, & W,	8,00	
40,00	Falls in bluffs, not set,		
	therefore, at 15 chs, Set	28,00	
	a Sandstone 16x10x4 in,	30,00	
	12 in deep, marked 1/4	37,00	

Salt Lake Meridian.

W. C, on N. side, & raised mound of stones for Witness ¼ Sec. Cor.
Note: Abandon line here,
Land broken,
Soil 2nd rate,
No timber

From the Cor. to Secs. 1, 2, 11, & 12,
West on true line
between Secs. 2 & 11,
Var. 16° E,

7,50 Cañon wash draines N;
8,00 Telegraph line to Kanab bears N. & S. and Road bears do.
28,00 Ridge bears N. & S.
30,00 Hollow, no drainage.
37,00 Ridge bears N. & S.

Subdivisions. Tp. 42 S. R. 11 W.

Chains.		Chains
40,00	On W. slope of ridge,	
	Set Sandstone 17 x 12 x 8 in,	16.00
	11 in. deep, marked 1/4 on	19,50
	N. side, & raised mound of	
	stones for 1/4 Sec. Cor,	20,25
44,00	Spring branch in Gulch	23,00
	runs N.	28,75
47,50	Cairn rock bears N. & S. 11 ins. dia.	
80,00	Set Gypsum 16 x 10 x 4 in,	31,70
	Notched 2 on E. & 5 on S.	
	edges. & raised mound	38.10
	of Gypsum. for cor. to	40,00
	Secs. 2, 3, 10 & 11,	80,00
	Land along line broken,	
	Soil 2nd rate,	
	No timber,	

North on random line	40,00
between Secs. 2 & 3,	

Salt Lake Meridian,

Chains	
	Var. 16° E.
16.00	Gulch drains N. E.
19.50	Fence bears E. & W. enters cultivated land,
20.25	Ditch runs N.
23.00	Fence bears N.E. & S.W.
28.75	" " E & W. leaves cultivated land,
31.70	Rio Virgin 128 lks. wide 12 in. deep, runs N. W.
38.10	Enters fence bears W. leaves field.
40.00	Set temporary 1/4 Sec. Cor.
80.00	The true cor. point to Secs. 2 & 3 not being set, therefore at 42.37 chs. intersect at Witness Corner to Secs. 2 & 3, on N. Boundary from which, S. on true line between Secs. 2 & 3.
40.00	On N. side of stone Wall, bears E. & W. Set a Sand=

Subdivisions. Sec. 2 & 3 T. 42 S. R. 11 W.

Chains	Stone 24×12×4 in., marked 8 from each 1/4 on W. side & raised mound of stones for 1/4 Sec. Cor.	Chains
80,00	The Cor. to Secs. 2.3.10 & 11 Land level in bottom, Soil 1st rate, No Timber,	
	From the Cor. to Secs. 2, 3, 10 & 11, South between Secs. 10 & 11, Var. 16° E.	
6,50	Gulch Chains N.W.	9,50
8,00	" " "	14,35
10,00	Foot of high Bluffs bear E. & W.	40,00
40,00	In bluffs. Not set. at 10 Chs. Set Gypsum 16×10×4 in.	

Salt Lake Meridian.

Chains, 12 in. deep, marked 1/4 S.C., on N. side, & raised mound of Gypsum for Witness 1/4 Sec. Cor,

Note; Abandon line here,
Land broken,
Soil 2nd rate,
No Timber

From the Cor. to Secs,
2. 3. 10 & 11,
W. on true line between Secs. 3 & 10,
Var. 16° E.

9.50 Gulch drains N. W.
14.35 " drains N. bench bears N. 9° W.
40.00 Set Sandstone 12 x 10 x 5 in, 8 in deep, marked 1/4 on N. side & raised mound of Stones for 1/4 Sec. Cor,

Subdivisions of Sec. 12 S. R. 11 W.

Chains		
80,00	Set Sandstone 20x10x4 in,	Chains
	15 in. deep, notched 3 on E,	
	& 5 on S. edges, & raised	
	mound of stones for Cor. to	
	Secs. 3. 4. 9 & 10,	50,00
	Land heavy rolling,	34.40
	Soil 2nd rate,	71,50
	No timber,	
		74,00
	North on random line	76,00
	between Secs. 3 & 4.	
	Var. 16° E,	
40,00	At foot of bluffs. bear	80,00
	N. W. & S. E, Set temporary	
	1/4 Sec. Cor,	
45,50	Road bears E. & W.	
46,00	Fence bears E. & W. being	
	N. side of street in Grafton	40,00
	Settlement, Said Street	

Chains

bears E. 3,50 chs. thence N, 8 chs, thence E. 11 chs. D has 18 houses as platted. Here enter cultivated land.

50,00 Fence bears E. & W.

54.40 " " "

71,50 " " N.W. & S.E.

bears cultivated land,

74,00 Rio Virgen, 150 lks. wide 12 in. deep, runs W.

76,10 Road bears E. & W. & wood road bears N.E. & S.W.

80,00 Intersect N. Boundary of Ty, at Cor. to Secs, 3 & 4 from which,

S. on true line between Secs, 3 & 4.

40,00 Set Sandstone 20 x 10 x 5 in. 15 in. deep, marked

Subdivisions. Tp. 42. S. R. 11 W.

Chains 1/4 m N. side ▽ raised mound of stones for 1/4 Sec. Cor,

80,00 The Cor. to Secs. 3, 4, 9 & 10, Land level in bottom, Soil 1st rate, Nov. timber,

From the Cor. to Secs, 3, 4, 9 & 10 West on true line between Secs. 4 & 9, Var. 16° E,

40,00 Set Sandstone 12x10x7 in. deep, marked 1/4 on N. side, ▽ raised mound of stones for 1/4 Sec. Cor,

80,00 Set Quartzite, 13x9x6 in. 9 in. deep, notched

Chains 4

80,00

Salt Lake Meridian,

Chains 4 on E, & 5 on S, edges & raised mound of stones for Cor, to Secs, 4, 5, 8, & 9,
Land broken cliffs
Soil 2nd rate,
No Timber,

North on random line between Secs, 4 & 5,
Var, 16° E,
Note: As the line in place is impracticable I Offset 40 chs, W, thence N, 80 chs, thence E, 40 chs, to

8000 In place, Intersect N, Boundary of T, at Cor, to Secs, 4 & 5 from which,
S, on true line, between

Subdivisions of Sec. 4 T. 42 S. R. 11 W.

Chains,	Secs. 4 & 5,	Chains,
40,00	Failing in inaccessible ground, therefore at 9 chs, in S. edge of cultivated field & foot of bluffs bear E. & W.	40,00
	Marked a station any Quartzite 24 x 18 x 18 ins. Above Ground, 1/4 N. C, & raised mound of stones for Witness 1/4 Sec. Cor,	
80,00	The Cor, to Secs, 4, 5, 8 & 9, Land mostly mountainous Soil 2nd rate, 1st rate in bottom, No Timber.	80,00

Salt Lake Meridian

Chains

From the Cor. to Secs. 4, 5, 8 & 9.

West on true line between Secs. 5 & 8, Var. 16° E.

49.00 Set a Quartz ile 14 x 10 x 4 in., 4 in. deep, marked 1/4 on N. side, & raised mound of stones for 1/4 Sec. Cor.

Note: Further chaining impracticable.

I Offset 30 chs. N. thence 40 chs. W. to a point 30 chs. N. of

80.00 W. Cor. point where I set a trachyte 16 x 10 x 9 in., 11 in. deep notched 5 on E. & 5 on S. edges, W.C. & raised mound of stones for Witness Corner.

Subdivisions, 2N. 42 S. R. 11 W.

	Chains to Sees. 5, 6, 7 & 8, Land broken bluffs, Soil 2nd rate, No timber,	8,000
	North on random line between Sees. 5 & 6, Var. 16° E.	
30,00	The Witness Corner at foot of bluffs, bears N.E. & S.W.	
40,00	Set temporary 1/4 Sec. Cor.	
80,00	Intersect N. boundary of Sec. at Cor. to Sees. 5 & 6, from which,	
	S. on true line between Sees. 5 & 6,	
4,00	Set Sandstone 13x7x7 ins. ins. deep, marked 1/4 on W. side, & raised	

Salt Lake Meridian

mound of stones for 1/4
Sec. Cor,
The Cor. points to Secs, 5. 6. 7
& 8,
Land broken,
Soil 2nd rate
No timber,
March 24th 1877 F. C. Bailey

General Description,

The Surveyed portions of this Tp, embraces the bottoms of the Rio, Virgin mostly under cultivation, Sec, 1 Contains the Settlement of Rockville, of about 200 inhabitants, Sec, 3. Grafton Settlement of about 100 inhabitants,

I return all as

BOOK-A-153

Examined by C. H. Cramwell. C.C.

Field Notes
of the
Subdivisions of
Township 42 South Range 12 West
Salt Lake Meridian
Utah Territory
as surveyed by
J. S. Burrill
under joint contract Bailey & Burrill
No. 75 — dated Sept 4th 1876

Survey commenced March 21st 1877
" completed " 21st "

430

BOOK-A-153

Township 42 North **R.** 12 West

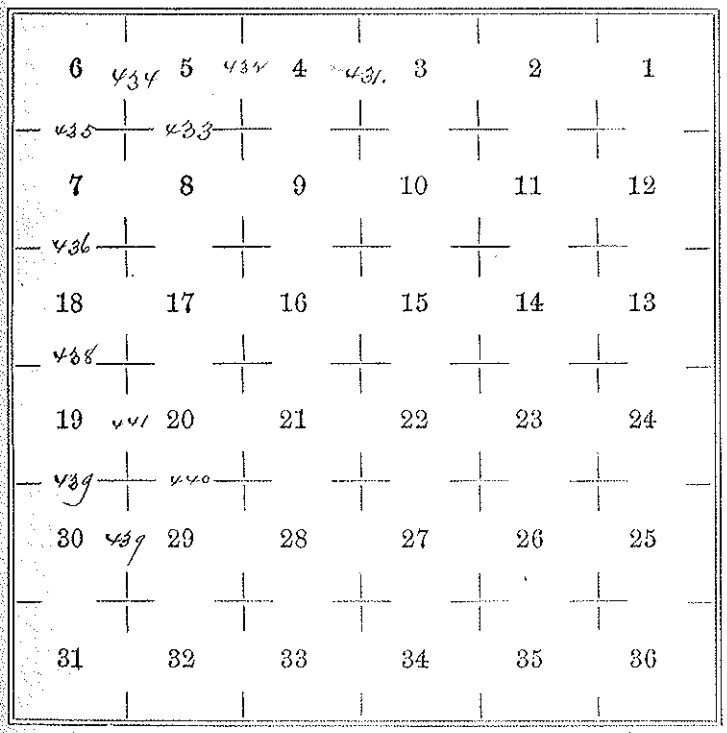

BOOK-A-153

Subdivisions, Tp. 42 S. R. 12 W.,
Salt Lake Meridian,

March 21st 1874.
By. J. S. Burrill

The South part of this Tp.
not being Surveyed on Account
of Mountains, Therefore
from the Cor. to Secs. 3 & 4,
on N. boundary of the Tp.
I run,

South on true line
between Secs. 3 & 4,
Var. 16° E.

1.00 Fork of high Bluff bears
N.E. & S.W. Set Sandstone
12 x 4 x 6 in. 9 in. deep, &
mined mound of stones for
1/4 Sec. Cor.

Abandon line here,
Land level.
Soil 1st rate,
No timber.

Subdivisions, Pt. 42 S. R. 12

Chains, From the Cr. to Secs. 4 & 5 [illegible]
on North boundary, I ran
South on true line
between Secs. 4 & 5,
Var. 16° E.

5,00 Bottom of Canon drains S.
10,50 Top of low ridge bears
N.E. & S.W.
26,00 Bottom of Canon drains S.
40,00 Set Sandstone 16x10x4
12 in deep, mound mar
pitches for 1/4 Sec. Cor,
50,00 Foot of bluffs, bear E. &
80,00 Face of bluffs. Not re
Therefore at 50,00 ch 40
Set a Sandstone 11x
x 6 ins. 7 in deep, marke
4 pitches on E. & S. on
& raised mound of stones
Edge of W. B. for Witness
Cor. to Secs. 4, 5, 8 & 9,

BOOK-A-153

488

Salt Lake Meridian.

Chains, Land Broken.

Soil 2nd rate,

No timber.

The Cor. to Secs. 5, 6, 7 & 8, not being set
therefore I run,
West on true line
between Secs. 5 & 8.
Var. 16° E.
The line in place being
impracticable therefore
from the Witness Corner
30 chs. N. of the Cor. point
I run west on an offset line 40 chs. to
40.00 Set Limestone 16 x 12 x 9 in. above ground
marked 1/4 S.C. on N. side & raised mound
of stones for Witness 1/4 sec. cor. Continue W. to
80.00 chs. thence S. 30 chs. to,
80.00 In place, Set a Limestone
12 x 9 x 5 in. above,
notched 5 on E & S. edges

BOOK

Subdivisions, Pt. 42 S.T.12

Chains, Mound, Stone, Chains,

for Cor, to Secs, 5, 6, 7 & 8, 40,20

Land Mountainous,

Soil 2nd Rate,

No Timber

11,20

North on random line

between Secs, 5 & 6,

Var, 16° E,

2,11,00 Enter flat bears N.E. & S.W.

30,11,00 Enter bluff breaks & leave

flat, bears N.E. & S.W.

thence in the breaks to,

44,00 Ash post of pine, set 6,00

temporary 1/4 Sec. Cor,

80,20 Intersect N. boundary of 34,00

Pt, at Cor, to Secs, 5 & 6, 40,00

from which,

South on true line 80,00

Salt Lake Meridian.

Between Secs. 5 & 6,
Set sandstone 11"x11"x6 in.
above ground, deep, marked 1/4 on N.
side, & raised mound of
stones for 1/4 Sec. Cor.
11.20 The Cor. to Secs. 5, 6, 7 & 8,
Land S 1/2 broken,
N 1/2 level, Soil 2nd rate,
No timber.

West on random line
between Secs. 6 & 7,
Var. 16° E.
6.00 Enter bluff breaks, bear
N. & S.
24.00 Rivers open N.
40.00 On ridge ~~down~~ bears N. & S.
Set Temporary 1/4 Sec. Cor.
80.00 Intersect N. boundary of

Subdivisions T. 42. S. R. 12. W.

Chains	Township at cor. to secs. 687 from which East on true line bet. secs 687
40.00	Pet Limestone 18×8×4 in 12 ins deep marked 1/4 N. side raised mound stone for 1/4 sec. cor.
80.00	The cor. to secs. 5. 6. 7 & 8 Land mostly broken Soil & rate Timber

---

The cor. to secs. 7. 8. 17 & 18 nothing set therefrom from the cor. to secs. 7 & 8 on N. boundary of Township Drawn East on true line bet. secs. 7 & 8

500K-A, 153

437

Salt Lake Meridian

Chains Mar 16° E.

0.00 Foot of Bluff Sec 17 & 18.

0.00 Falling in Bluffs can not be set Therefor at 30.00 chs set Stone 16 x 12 x 8 ins. 11 ins. deep marked 1/4 on N. side V.V.C. & raised mound of stone for witness 1/4 Sec. Cor.

Note: I abandon line here Land broken, Fire & Dale No Timber

The Cor. Secs. 17. 18. 19 & 20 not being set therefrom from the Cor. Secs. 18 & 19 on N. boundary of Township I run East on true line

Subdivisions T. 42, S. R. 12.

Chains

Pt. secs. 18 & 19

Va. 16° E.

0.90 Fence bears N.E. 15.00 d
W.S.W. 150 lks to crk

1.90 Post of S.W. point of Bla
Ledge

40.00 Falling in Black Led
is not set, therefore a
1.90 chs. marked as sta
Tinary Trachyte 20 x 24
x 24 in. above ground 1/4
on N. side & W.C. Bal
mound of stone for 4 sec

Note: Abandon line here -
Land broken hilly & Ba
No Timber -

The cor. to sec. 19, 20, 29
& 30 not being set
therefore from the cor

Salt

Pains

an
Ea
br

40.00 Le
5.
di
ri
80.00 De
Em
4
m
Ra
Ja

Salt Lake Meridian

Spans N. secs. 19 & 30 & W. bound-
ary of the township from
East on true line
Nrt. secs. 19 & 30
On. 16°. E.

40.00 Set Sandstone 9×9×8 in.
5 in. deep, marked 1/4 on E.
side, raised mound of
stone for 1/4 sec. cor.

80.00 Set Sandstone 12×8×6 in.
5 in. deep, notched 5 on 6.
& 2 on S. edges, raised
mound of stone for
cor. secs. 19. 20. 29 & 30
Land level, soil Gravel
No Timber —

South Nrt. secs. 29 & 30
On. 16. E.

40.00 In mouth of Bluffs, bears

Subdivisions T. 42 S. R. 12 E.

Chains N.E. & N.W. Set Sandstone 13 x 10 x 7 in. Dim. deep mar... 1/4 on N. side raised mound of stones for 1/4 sec. cor.

Note: I abandon line here Landlord Dirt Rat... to Timber —

From the cor. Secs. 19, 20, 29 & 30 East on true line 1/4 sec. 20 & 29 Va. 16° E.

40.00 Near foot of Bluff Bears N.E. & N.W. Set Sandstone 12 x 9 x 7 in. & in deep marked 1/4 on N... side raised mound of stone for 1/4 sec. cor.

Salt

Chains Sa...

Note: I...

Fra...

T3...

40.00 On...

Note: S...

Salt Lake Meridian

chains Land level dirt Gate
No Timber
Note: I abandon line here

From cor. Dec 1. 19. 20. 29
W 30
North 80 rt. dec. 1 W 20
Va 16° E.

40.00 On edge of canon drains
N.W. set Sandstone 13 x
10 x 10 in. 8 in deep marked
1/4 on W. side & raised
mound of stone for 1/4 sec.
cor.

Note: I abandon line here -
Land level dirt Gate
No Timber -
March 25th 1877 J. G. Burrill

444

General Descriptio

The lands in the sur
veyed portion of this
township embrace th
Workman settlemen
partly in Secs. 18 & 19 &
the surrounding land
covered with good gra
& artemisia.

The lands are
agricultural -

J. G. Burrill
U. S. Dep. Surv

BOOK-A-153

U. S. SURVEYOR GENERAL'S OFFICE.

Salt Lake City, Utah, June 30th *1877*

The foregoing field notes of the survey of the Subdivision lines

Township No. 42 S. *Range No.* 12 W. *Executed by* Bailey & Burrill *Under their Joint contract of the* 4th *day of* Sept. *187*6, *in the month of* March *187*7, *having been critically examined, the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.*

Graham Kimball

Surveyor General for Utah.

BOOK-A-153

Examined by C. H. Cramwell C.C.

Field Notes of the East Boundary Township 42 South Range 13 West Salt Lake Meridian Utah Territory

as surveyed by

J. S. Burrill

under joint contract Bail Burrill No. 13 — dated Sept 1876

Survey commenced March 20th 1877

" completed " " " "

105

477A

BOOK-A-153

Township 42 South **R.** 13 West

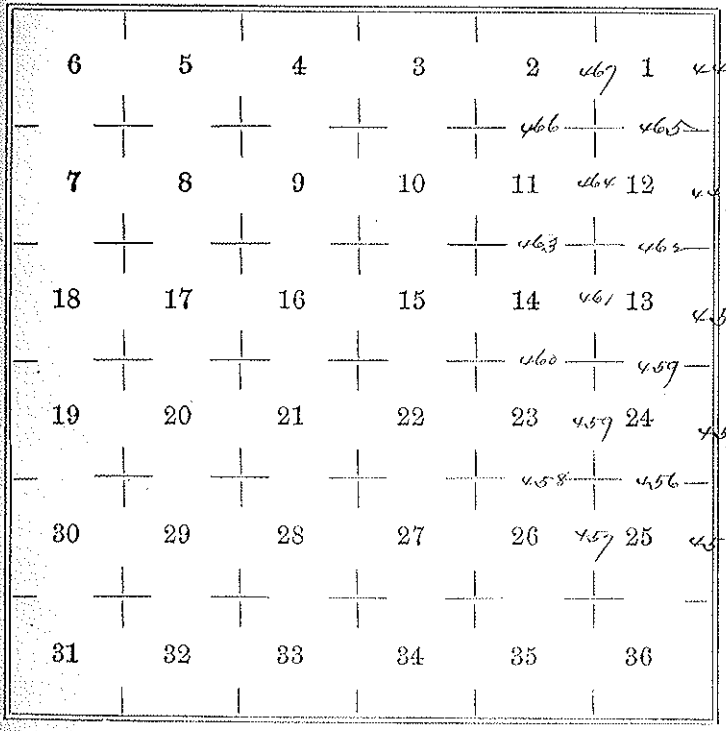

East Boundary T. 42 S. R. 13 W.

Chained Feb 20th 1877 by J. G. Burrill

The cor. to Townships 42 & 43
S. R's 12 & 13 W. not being
set therefore from the
cor. to T's 41 & 42 S. R's 12 & 13
North 80 lks. acs. 186
Va. 16 E.

25.50 Mesh drains N. W.

34.90 Road bears E & W.

40.00 Set sandstone 18 x 12 x 4in
12in. deep marked 1/4 on W
side raised mound of
stone for 1/4 sec. cor.

50.00 Wash drains N. W.

62.50 Road bears N. E. & S. W.

80.00 Set sandstone 19 x 14 x 5in
12in. deep notched on N
5 on S. edge raised mound
of stone for cor. 5 acs. 1. 6. 7 & 12
Land slightly broken

BOOK-A-153

Salt Lake Meridian
Chains Price Date — No Timber

South Ft. secs. 7 & 12
Va. 16 E.

12.00 Wash drains N.W.

40.00 Set Sandstone 22×12×2in
15in. deep marked ¼ cor N.
side raised mound of
stone for ¼ sec cor.

40.00 Set Sandstone 26×10×2
in. 18in. deep notched 2in.
N. & S. edges & raised
mound of stone for cor. to
secs. 7. 12, 13 & 18
Land broken Soil Rocky
No Timber

459

East Boundary T. 42 S. R 23 E.

Chains South Pt. secs. 13 & 18
Ba. 16° E.

Note: To avoid bluffs Do offset
West 20.00 chs. Thence South 25
40.00 chs. Thence East 20.00
chs. to

40.00 On true line set Limestone
20 x 4 x 4 in. 4 in. deep mark
1/4 on N. side & raised mound
of earth from 4 pits each
24 x 12 x 12 in. for 1/4 Sec. Cor.
from which Old Fort
bears S. 54° 15' W 29.50 chs. Dist

59.00 Road bears N. W. & S. E.
61.00 " " N. E. & S. W.
65.00 Line Tree 7 Links N.
65.10 Drift Wash drains N. W. 0.70 Fe
65.50 Fence bears N. W. & S. E. & .10
enter field & orchard 2.10
78.00 Top of cellar, Northeast

Salt Lake Meridian

Runs Fences 75 lks. E. another
fence 3.50 chs. N.E. of
Norman's
0.25 Fence bears N.E. & S.W.
Lear field —
0.00 At Sandstone 30 x 12 x 12
ins. 24 in. deep notched 3 on N.
& S. edges & mound
of stone for cor. to secs. 13. 18. 1924
Land mostly level
& Soil State No Timber —

South bet. secs. 1924
Va. 16° E.
0.70 Fence bears N.E. & S.W.
1.10 " " N.W. & S.E.
2.10 Spring Branch 5 lks wide
runs N.W.

East Boundary T. 42 S. R. 15

Chains

4.00 Foot of Basaltic Bench
bears N. W. 75 S.

4.25 Topoſoame — Moqui
Village remains —

40.00 Deposited 1 pint of pebbles
in mound of earth
raised from 4 pits
each 24 × 12 × 12 in. for ¼
section.

80.00 Set Sandstone 18 × 10 × 6
in. 12 in deep notched
on N. & S. edges & raised
mound of stone for cor. to sec
1924. 25 & 30.

Landlevel Soil Sandy
No Timber —

North bet. secs. 25 & 30

Salt Lake Meridian

Chains

T. 9 S., R. 16 E.

10.00 Foot of Ridge & Bluff
Bears S.E. D.M.

40.00 Falling in bluffs the cor.
is not set therefrom at
10.00 chs. set sandstone
13x10x7 in & in deep marked
1/4 YY.C. on N. side & raised
mound of stone for 1/4 sec
cor.

Note: I abandon line here
Land mostly in bluffs
Dirl 2d rate No Timber
March 20th 1877 J. G. Burrill.

Note: For General Description
& Approval see end of sub-
division notes of this Town-
ship -

BOOK

Ex

Tow

un

A

Th

BOOK-A-153

455

Examined by C. H. Cramwell. C. C.

Field Notes of the Subdivisions of Township 42 South Range 3 West Salt Lake Meridian Utah Territory as surveyed by F. C. Bailey under joint contract Bailey & Lewis No. 73 — dated Sept 4th 1876

Survey commenced Dec 20th 77
" completed " 29th "

Subdivision T. 14 S. R. 6 E. 16.7
March 29th 1877 by J. C. Boyd Jr.

Chains Note: The South
West portions of this
Township not being sur-
veyable, therefor from
the cor. secs. 24 & 25 on
East Boundary of Town-
ship
West on true line
Bet. secs. 24 & 25

Va. 16. E.

4.00 Road in Sand Rock deep
34.00 Road runs N & S.
40.00 Set Trachyte 14 x 10 x 6 in.
pits deep marked I C on
S. side raised mound
of stone for 1/4 sec. cor.
80.00 Set Trachytic Rock 12 x
12 x 6 in. 6 in. deep notched
cor 6 & 2 on S. edge raised
mound of stone for cor to

S. M. Salt Lake Meridian

16 chains secs. 23. 24. 25 & 26
Land level. Arid & Valley
No Timber.

South Pt. secs. 25 & 26
Va. 16° E.

40.00 Set Trachyte 12×9×6 in. 8 in deep marked 1/4 on N. side & raised mound of stone for 1/4 sec. cor.

80.00 On W. side of Road bears N. E. & S. W. Set Trachyte 18×8×5 in. 12 in. deep notched on E & S. edges & raised mound of stone for cor. to secs. 25. 26. 35 & 36.
Land level. Arid & Valley
No Timber.

Subdivisions T. 42. S. R. 13. W.

Chains Return to the cor. to secs.
23. 24. 25 & 26 from
West on true line
bet. secs. 25 & 26
Va. 16° E.
40.00 N. 40.00 Foot of Basaltic Ridge
Mark. B.T.S. C. set a Truck
yte 13 x 9 x 6 in. 8 in. deep
marked 1/4 on N. side with
mound of stone for 1/4 sec. cor.
Note: Abandon line here.
Equivalent Soil, Rock
& Timber —

From the cor. to secs. 23. 40.00
24. 25 & 26
North bet. secs. 25 & 24
Va. 16° E.

BOOK-A-153

Salt Lake Meridian

Chains

10.00 Set Basaltic Rock 18x12x
5 in. 12 in. deep, marked 1/4
on N. side, raised mound
of stone for 1/4 sec. cor.

10.00 Set Basaltic Rock 16x10x
8 in. 11 in. deep, notched 1 on E.
& 3 on S. edges, raised mound
of stone for cor. to secs. 13. 14. 23 & 24
Land level, soil & data
No Timber =

East on random line
bet. secs. 13 & 24
Va. 16°E.

40.00 Set temp. 1/4 sec. cor.

37.00 Enter Bench Breaks run
N.W. & S.E.

17.00 Spring Branch runs N.W.

460

Subdivisions T. 42 S. R. 93 W.

Chains	
80.10	Intersect E. boundary of township at cor. to secs. 13 & 24 from which Wt. on true line bt. secs. 13 & 24
40.05	set Trachyte 14 x 10 x 8 in. 9 in. deep inscribed 1/4 on N. side to which is mound of stone for 1/4 sec. cor.
80.10	The cor. to secs. 13. 14. 23 & 24 Land mostly level Soil 2nd rate - No Timber -

---

West on true line
bt. secs. 14 & 23

On. 16. E.

16.50	Gulch drains S. W.
30.00	" (same) " S. 7.00 ch.

Salt Lake Meridian

chains thence west—

40.00 Falling in impracticable ground for cor. not set thereon at 30.00 chs. Set Basaltic Rock 16x10x4 in. 11 in. deep marked 1/4 on S. side & W. C. Raised mound of stone for witness 1/4 sec. cor.

Note: Abandon line here. Land broken Soil & Sale No Timber—

From the cor. to secs. 13. 14 23 & 24

North bet. secs. 13 & 14 No. 16° E.

3.25 Wash drains W

37.00 Wash in rock walled cañon

Subdivisions T. 42 S. R. 13 W.

Chains		
	drains N. W.	
40.00	Set Trachyte 13x10x6in. 8in. deep marked 1/4 on N. side raised mound of stone for 1/4 sec. cor.	
80.00	Set Limestone 16x12x5in. 11in. deep notched 1 on E. & 4 on S. edges raised mound of stone for cor. to secs. 11. 12. 13 & 14.	40.06
	Land level and 2 Bat. To Timber —	0.12

East on random line
bet secs. 12 & 13
Va. 16° E.

40.00	Set temp. 1/4 sec. cor.	
47.00	Road bears N 85.	11.00

Salt

Chains
70.12

Salt Lake Meridian

Chains	
0.12	Intersect East boundary of township at cor. to secs. 12 & 13 from which West on true line bet. secs. 12 & 13
40.06	Deposited small sandstone marked with a cross (+) in mound of earth from 4 pits each 24 x 12 x 12 in. for 1/4 sec. cor.
0.12	The cor. to secs. 11, 12, 13 & 14 Land mostly level Soil, Gate No. Timber

---

West on true line bet. secs. 11 & 14

Va. 16 E.

11.00 Basaltic Rocks

Subdivisions T. 42. S. R. 13. W.

Chains		Chains
40.00	Canon drains N. W.	24.00
	Falling in broken granite the cor. is not set, therefore at 11.00 chs. set a Basaltic Rock 10x10x6 in. 6 in. deep marked ¼ on N. side & W. C. & raised mound of stone for witness ¼ sec.	40.00
Note:	I abandon line here Sand broken, Sil. & Tal. No Timber	

From the cor. to sec. 11, 12, 13 & 14
North 1/4 sec. 11 & 12
Va. 16. E.

2.60	Wash drains N. W.	40.00
16.00	" " "	65.50

BOOK-A-153

7.65

Salt Lake Meridian

Chains

24.00 Mash drains W.

40.00 Set Limestone 14 x 8 x 5 in
9 in deep marked 1/4 on W.
side & raised mound of
stone for 1/4 sec. cor.

80.00 Set Limestone 20 x 12 x 4 in
15 in. deep notched 1 on E. &
5 on S. edges & raised mound
of stone for cor. to secs. 1. 2. 11 & 12
Land nearly level
Soil Rate - No Timber -

East on random line
bet. secs. 1 & 12
Va. 16° E.

40.00 set temp. 1/4 sec. cor.
65.50 Road to Virgin City
bears S. 6° E. N.

Subdivisions T. 42. S. R. 13.

Chains	
69.25	Nash drains N. W.
80.20	Intersect East boundary of Township at cor. to secs 11 & 12 from which Meander Corner bears N. 80 E. dist. 1.00 chs.
40.10	Set Sandstone 14 x 10 x 5 ins. 9 ins. deep marked 1/4 N. Side Trench mound 1 foot from cor.
80.20	Same cor. to secs. 1. 2. 11 & 12. Land level Good Timber No Timber

---

Meander Corner bears N. 80 E. dist. 1.00 chs.
Secs. 2 & 11
Va. 16° E.

40.00	Foot of Bluffs bears S.
	Set Trachyte 10 x 9 x 6 ins.

Salt Lake Meridian

Chains 6 in. deep marked 1/4 cor. S.
side raised mound of
stone for 1/4 sec. cor.
Note: I abandon line here —
Sand level, flat Salt.
No Timber —

From the cor. to secs. 1. 2
11 & 12
North on random line
Mt. secs. 1 & 2
Va. 16°E.

40.00 Set temp. 1/4 sec. cor.
59.00 Road trav. N. & S. E.
80.12 Intersect North bound-
ary of township 15 lks. E.
of cor. to secs. 1 & 2
from which

Subdivisions T. 42, S. R. 13. W. Salt

Chains S. 0°. 06'. E. on true line
Mt. Decs. 182

40.12 Set Limestone 14×9×6
9 in. deep marked ¼ on
W. side raised mound
of stone for ¼ sec. cor.

40.12 The cor. to secs. 1. 2. 11 &
Land level, Ark. Jan
No Timber

Note: I abandon the further
survey of this town-
ship here
March 20th 1877 T. C. Bailey

BOOK-

BOOK-A-153

Salt Lake Meridian

General Description

The lands in the surveyed portion of this township embrace a portion of the Workman Settlement in Secs. 13 & 24 & the two branches N.W.& S.E. of same—

The lands are agricultural—

T. C. Bailey
U.S. Dep. Surveyor

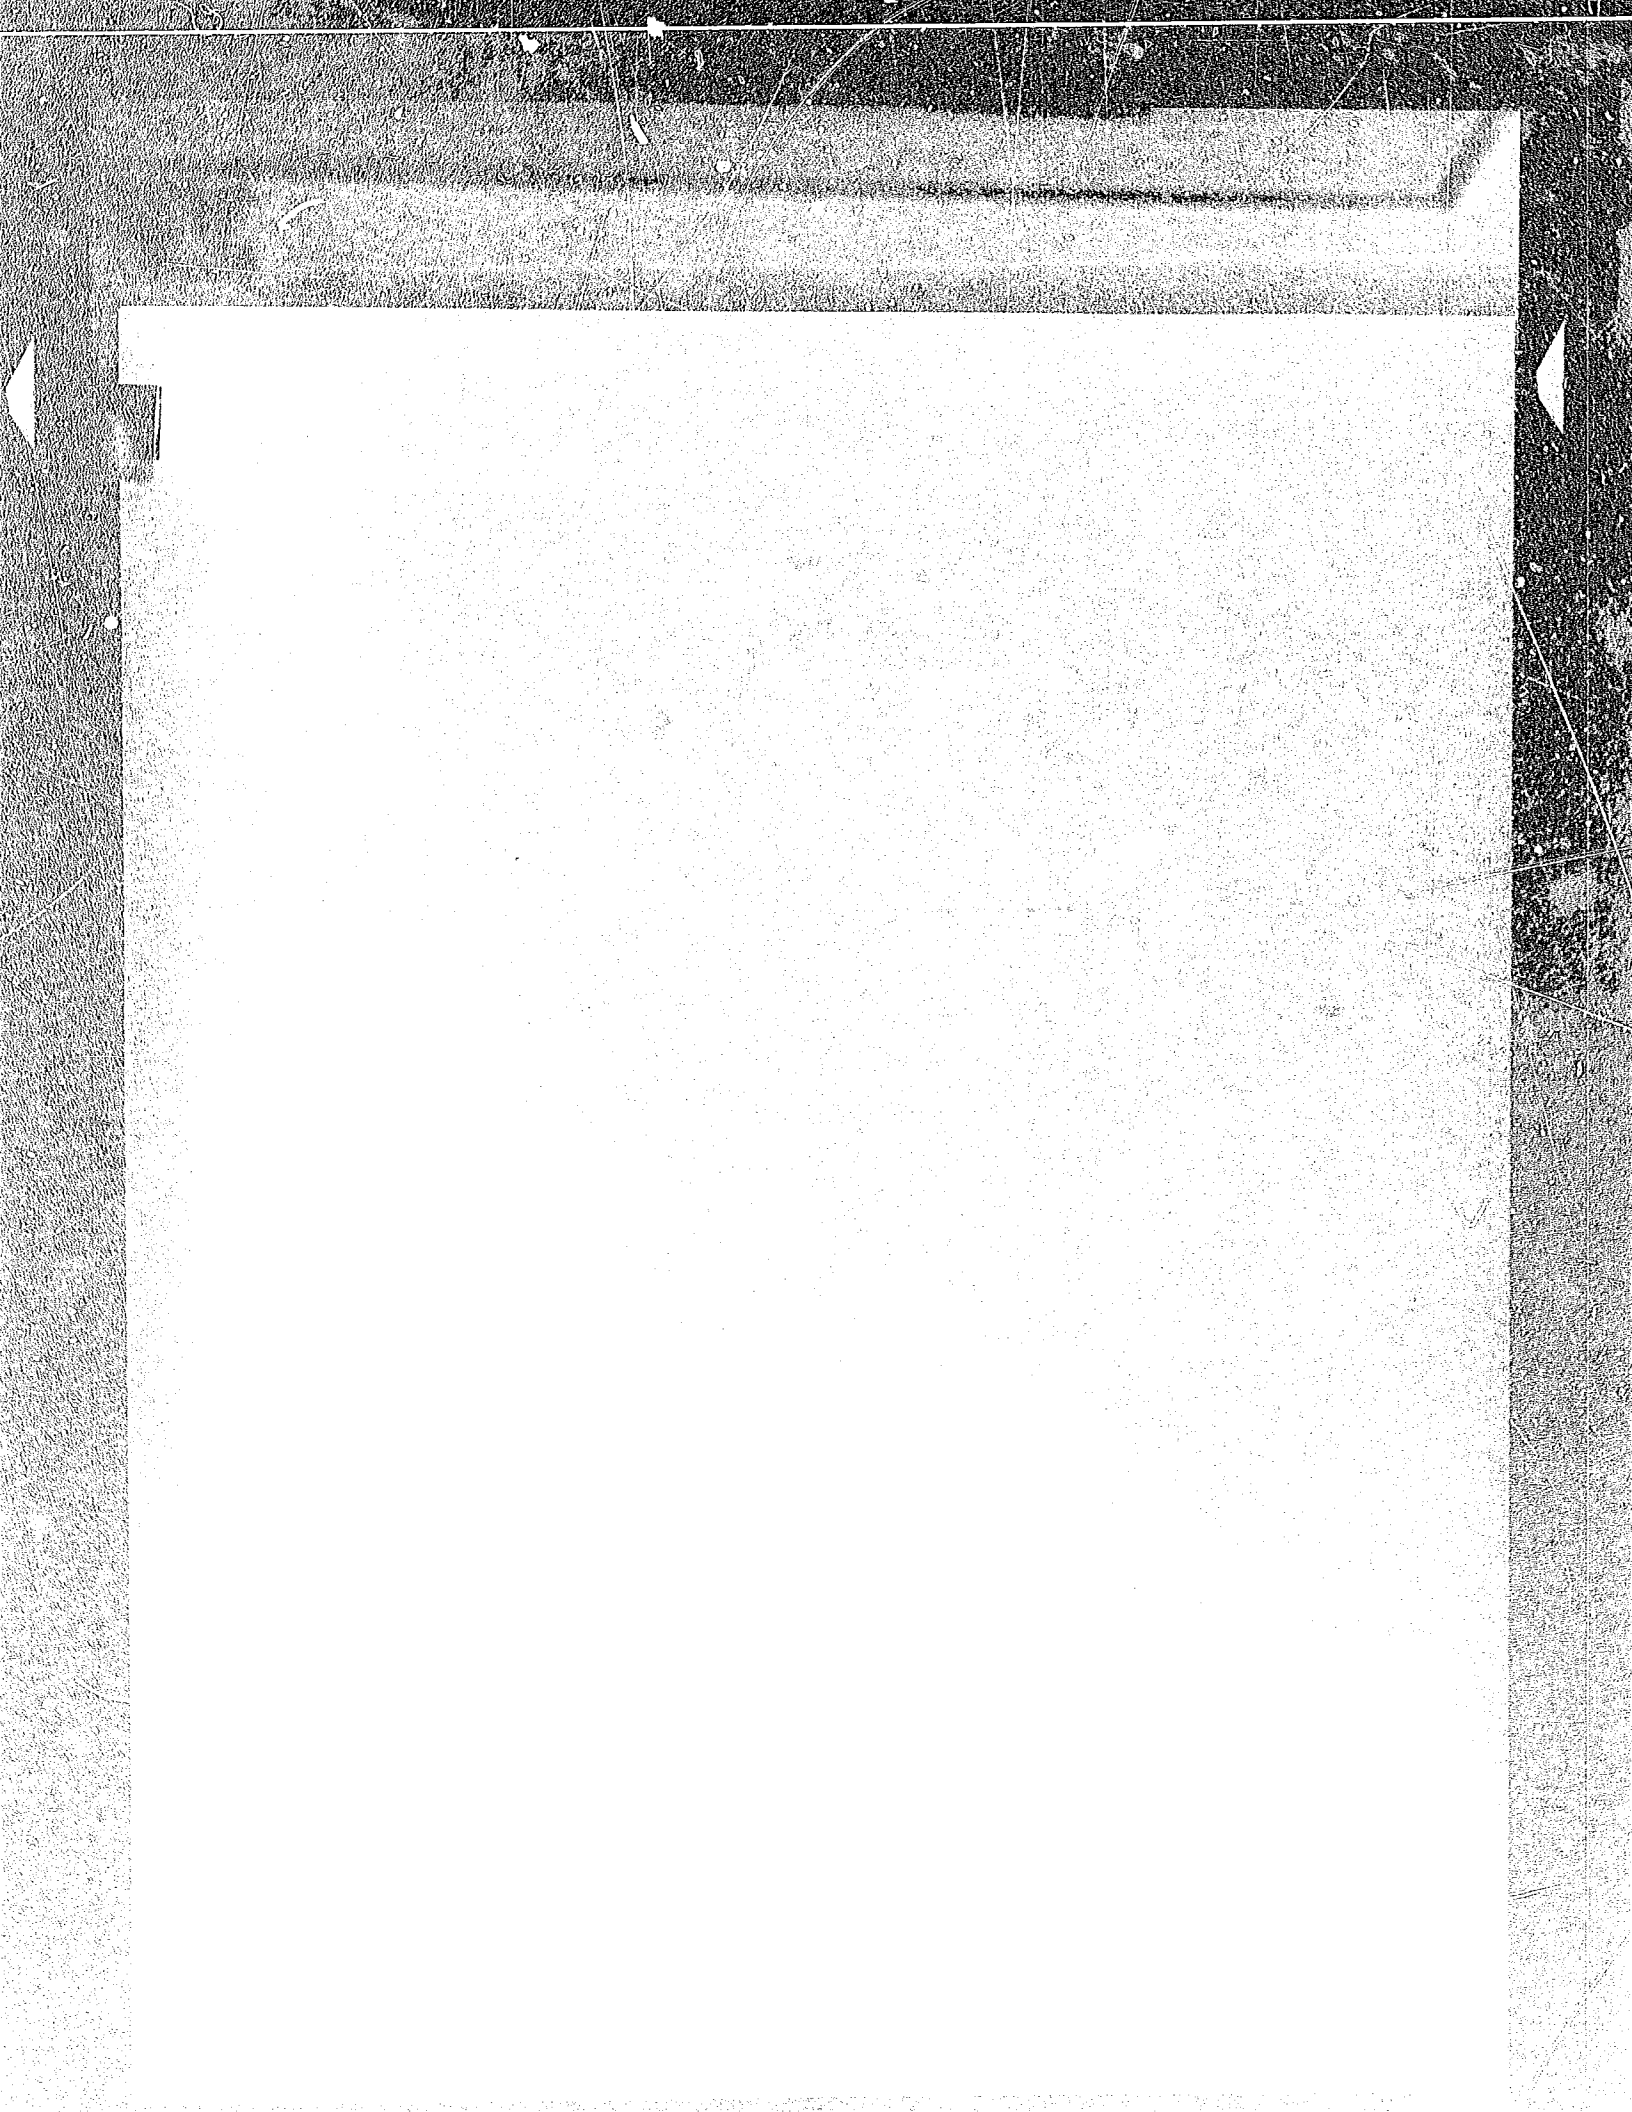

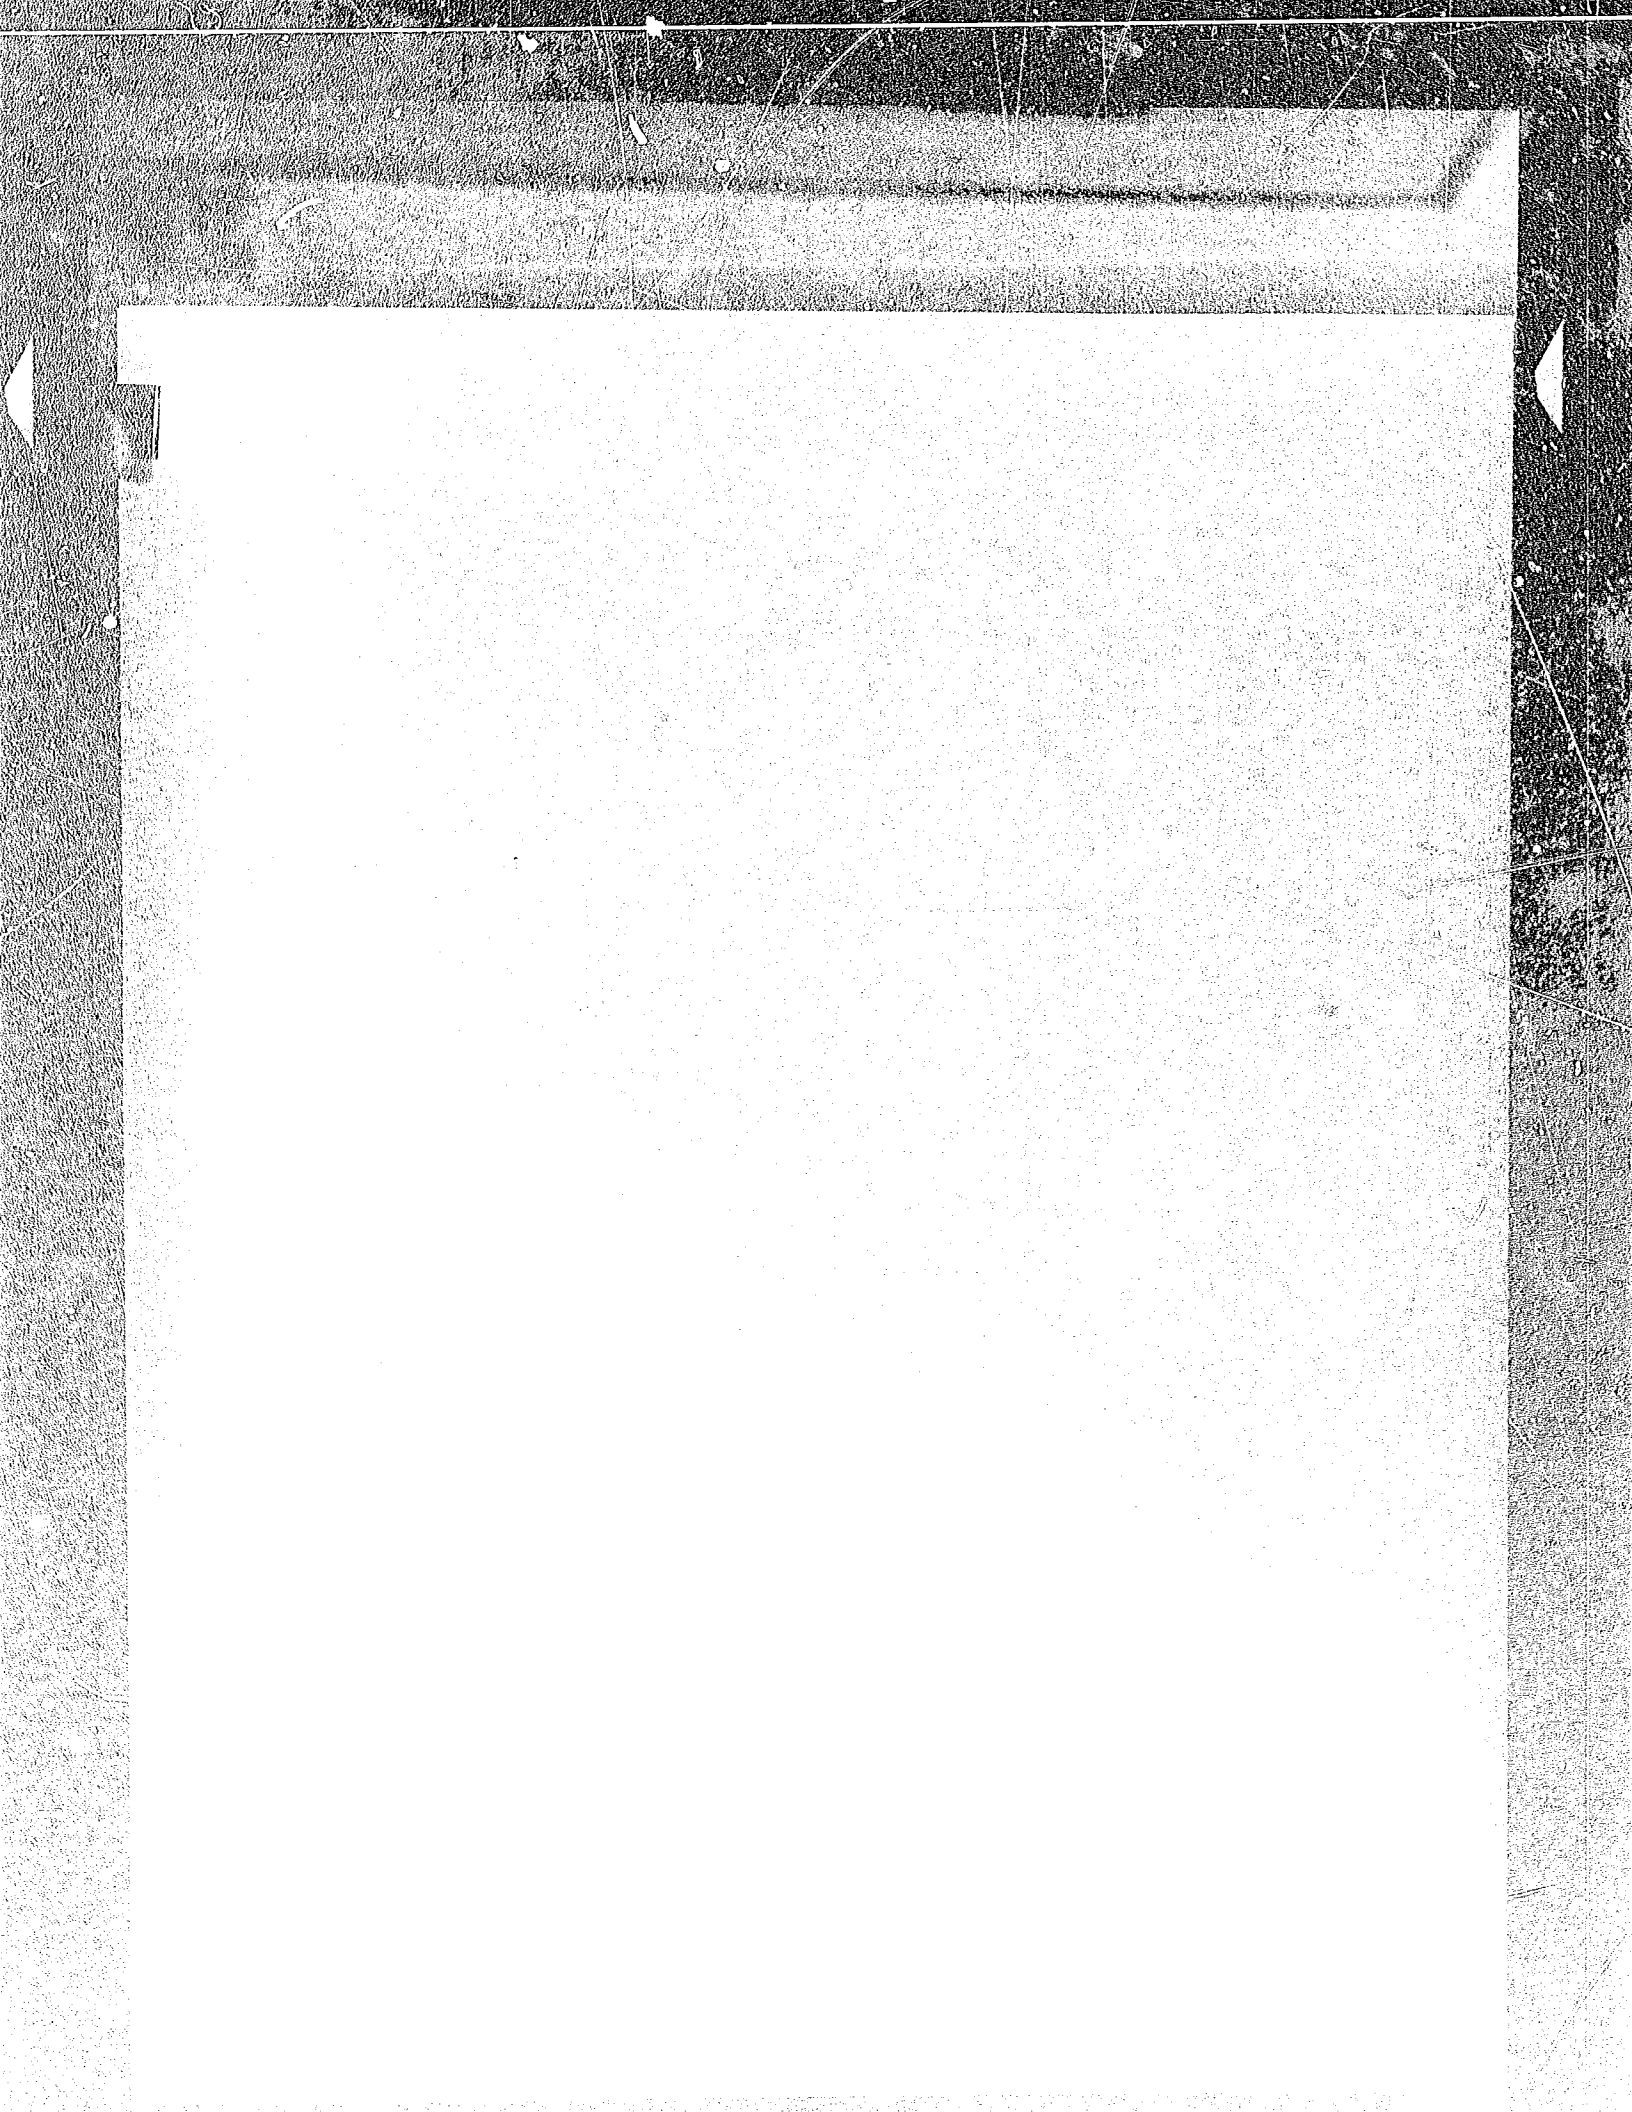

472
470-471 Blank BOOK-A-153

U. S. SURVEYOR GENERAL'S OFFICE,

Salt Lake City, Utah, June 30th *187*7

The foregoing field notes of the survey of the E. boundy & Sub. lines of *Township No.* 42 S, *Range No.* 13 W. *Executed by* Bailey & Burrill *Under* this Sub contract *of the* 4th *day of* Sept *187*6, *in the month of* March *187*7, *having been critically examined, the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.*

Chauncey Kimball

Surveyor General for Utah.

BOOK-A-153 20

13th Examined by C.H. Cramwell. C.C.

Field Notes

of

The Survey of the

West & North Boundaries,

of

Township 13 South, Range 1 West,

The Salt Lake Meridian

Utah Territory.

By

J. C. Burrill.

Under Joint Contract of Bailey & Burrill,

No. 13 dated Sept 11th 1876.

Surveyed March 7th 1877

BOOK

Ut. Boundary Tp. 43 S., R. 1 W.

March 9th 1897.

By J. G. Barrill.

From the established corner
to Townships 42 & 43 S.,
Rs. 1 & 2 W. Utah,
South on line
between Secs. 1 & 6,
Var. 15°30' E.,
Mean E. slope,

1/4,000 Set Sandstone 16 x 10 x 4 in.
10 in. deep, marked 1/4 on
S. side, raised mound
of stones for 1/4 Sec. Cor.

8,000 Set Sandstone 21 x 10 x 8 in.
15 in. deep, marked 1 notch
on E. & 5 on S. edges &
raised mound of stones
for Cor. to Secs. 1, 6, 7 & 12.
Land rocky & slope.
Soil 3rd rate.

North boundary N. 45 South, Range

Chains	Robinson	Chains
	Note, Abandoned line here	(80,00
	From the Cor. to Sec. 1/2 & 13, T. 1 S., R. 10 W. 3 min. East on true line	
	Between Secs. 6 & 31, Var. 15° 30' E.	
40,00	Set Sandstone 20×12×6 in. 18 in. deep, marked 1/4 on W. side, 2 ridges, mound of soil earth from 4 pits each 24×12×12 in. from 1/4 Sec. Cor. from which	
	A cedar 10 in. dia. bears N. 10 E. 12,5 links, dist. marked 25,0	
	1/4 S. 02, E.	38,9
45,00	A point of clay hill	45,0
71,50	Mark drain N. E.	

Ut. Pk., Salt Lake Meridian

Claim (80.00	Set charred cedar post 4 1/8 x 4 x 4 in, 12 in. dist, marked 5 notches on E, & 1 on W. edges; & raised mound of earth from 4 pits each, 2' x 12 x 12 in. for Cor. to Secs. 5, 6, 31 & 32. Land 20 1/2 rocky & steep, E 1/2 mostly level. Soil 2nd rate, No timber,
	East between Secs. 5 & 32, Var. 15° 30' E.
12.50	Road bears N. E. & S. W.
25.50	Gully bears N. E.
38.75	" " "
41.00	Set charred cedar post 4 1/8 x 4 x 4 in, 12 in. dist,

North Boundary Th. 115 South, Range 1 W.

Chains

Chains marked ⅞ on N. side ▽ raised 6,00
Mound of earth & stone + pits 23,00
each 24×12×12 in. for ¼ Sec. 40,00
Cor. from which
Cedar 6 in. dia. bears N.
88 W. 150 lks. dist. marked
1/4 S. B. T.
54,60 Road bears E. & S.W.
80,00 Set Sandstone 12×10×6 in. 44,50
10 in. dia. marked 1/4 Sec. 79,40
B.T. 2 W. ▽ raised mound of
stones for Cor. to Sec. 4. 5. 80,00
T. 1 S.
Land nearly level,
Soil Sandy,
Timber
Hardwood

Cash Adjustment Dec. 4 A.D. 33
Var. 15° 30' E.

Mont. Salt Lake Meridian

Chains	
16,00	Trail bears N. W.
23,00	Low ridge bears E. & W. descends
40,00	Set a Quartzite rock 12 x 4 x 4 in, 5 in, deep, marked 1/4 on E, mile & raised mound of rock from 4 pits each 24 x 12 x 12 in, for 1/4 Sec. Cor, alt. Rock obstructs,
44,50	Road bears N. & S,
179,40	Paria river 5 links, wide runs S,
80,00	Set Sandstone boulder 12 x 8 x 6 in, 5 in, deep, marked 3 notches on E, & 3 on Wedges & raised mound of stones for Cor, to Secs, 3, 4, 33 & 34
	Land undulating
	Soil Pl. Sandy,
	No timber,

North Boundary Dk. 43 S. Range 1 West.

Chains		Chains
	East between Secs. 34 & 35	
	Var. 19° 30' E.	
23,30	Red Sandstone 6 x 6 ins. 2 ft.	8,00
	N. & S. mark. it with a	
	Cross (+) on N. face,	
	Offset S. 2,00 chs. to avoid	
	S. point of bluff, Thence	
	East 16,70 chs. Thence	
	North 2,00 chs. to	
16,00	on true line, Deposited	
	a small stone marked	
	with a Cross (+) & raised	
	mound of earth, from	
	4 pits, each 24 x 12 x 12 ins.	
	for 1/4 Sec. Cor.	
54,00	Brush Chains S. 10 W.	
58,00	" " S. 3 E.	
70,00	Offset S. 6,50 chs. to avoid	
	the Bluffs, Thence East	
	on Offset line 16,00 chs.	

DOUK-A-153

West, Salt Lake Meridian

Chains	to point at foot of bluffs
	6,50 chs, S, 15°
8000	The true corner which falling
	in bluffs cannot be set,
	South the point 6,50 chs, S,
	I set a sandstone 20 x 10 x
	6 in, 10 in deep, marked 2
	notches on E & W on N, edges;
	N, C, & raised mound of
	stones for Witness Corner to
	Secs, 2, 3, 34, & 35,
	Land undulating
	Soil 2nd rate,
	No timber,

East between Secs, 2 & 35,
Var, 15° 30' E,
From the Witness Cor, 6,50
chs, S, of true cor, I run

North boundary Sec 1 T 43 S R 1 W

Chains

S. 63.30 E. to an old bluffs, Chains

Sec 36, T 42 S, R 1 W, 4th P.M. 200 lk. to
71.60 On true line, set Sandstone 18×12×4
12 in. deep marked 1/4 N.C. on N. side
& raised mound of stones for witness 1/4 Sec.
cor. Thence East on true line

5,000 Set Sandstone 20×12×3 in. 10 50,00
in. deep, marked 1 Notch on 80,00
E. & S. on N. edges & raised
mound of stones for Cor
to Secs, 1, 2, 35 & 36,
Land on true line broken,
rocky Bluffs,
Soil 3rd rate,
No timber,
Note, The 1/4 Sec. Cor. falling
in bluffs is not set.

East between Secs, 1 & 36,
Var. 15° 30' E.

4,00 Set Sandstone 20×10×4 in.

BOOK-A-153

Ut. Salt Lake Meridian.

Chains
10 in. deep, marked 1/4 on N. side, & raised mound & stones for 1/4 Sec. Cor. Near mouth of Gulch comes from N. E.

50,00 Leave brake,

80,00 Set Sandstone 18 x 12 x 10 in, 12 in. deep Marked 4 notches on N. S. E & W. edges, & raised mound of earth from 4 pits each 24 x 12 x 12 in. for Cor. to Shs. 42 & 43 S. R. 1 E & 1 W. on the Salt Lake Meridian Land W. Rocky, broken & rocky, Balance rolling Soil Gravelly, No timber,

March 9th 1877.

J. G. Burrill,
U. S. Deputy Surveyor.

Corrd

For General Description
of Mineral Land and of
Subdivision Notes of the
Township,

BOOK-A-133

Deed Note

of

The Salt Lake Valley

Subdivision Survey

of

Township 2 S. R. 1 East of Plat A

of

The Salt Lake Meridian,

Utah Territory

by

J. H. Daniels,

Under Joint Contract of Daniels & Daniels

Nos 38 dated Sept. 4th 1874.

Surveyed March 10th 1877

484

BOOK-A-153

Township 43 South **R.** 1 West

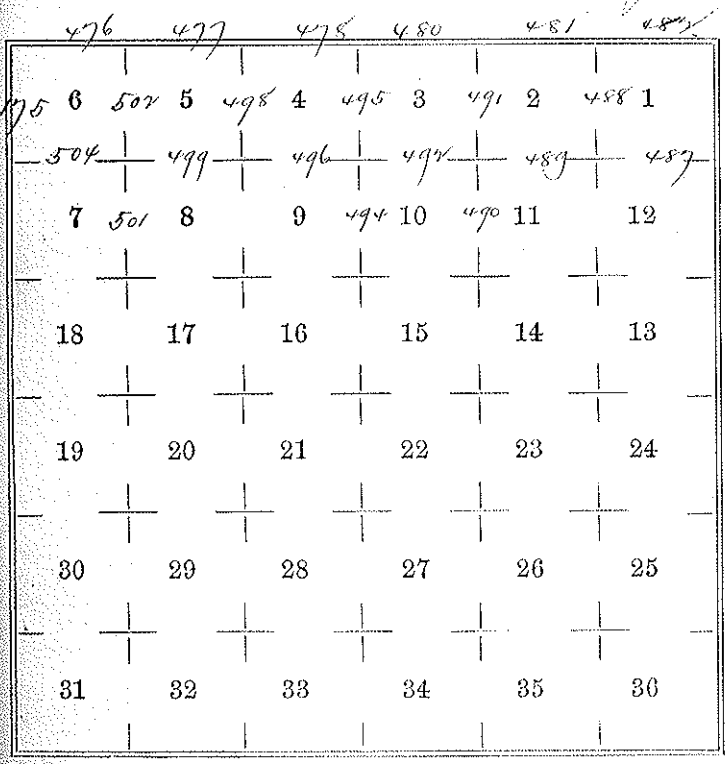

BOOK-A-153

Subdivisions Sec. 13, T. 8 S., R. 1 W.
Salt Lake Meridian. 487

Filmore, 16th 1894.

Dr. J. G. Barrick.

The South boundary and
Corner run from the Cor. to
Secs. 12 & 13 on the E. boundary
I run,

West on true line
between Secs. 12 & 13,
Var. 15° 30' E.,

Crossed through brooks,
Lava beds, bears N. & S.,

17.00 Set Sandstone 15 x 10 x 5, 10 in
40.00 deep, marked ¼ on N. side,
raised mound of earth from
4 pits each 2ft x 12 x 12 in. for
¼ Sec. Cor.

80.00 Set Stamped cedar post 4 ft
4 x 4 in. 12 in. deep, notched 1
on E. & 3 on S. edges, raised
mound of earth from 4 pits

Trees, each, 2 x 2 x 12 in, for Cor, to Secs, 1, 2, 11, & 12, on Cop of Hill,

Land broken,
Soil 2d rate,
Ha, under, 80,08

North on random line between Secs, 1 & 2,
Dar, 15° 30' E,

7,00	Bush Acacias S, W,
10,00	Sub Cacophonies & Sec, Cor,
11 7,00	Cactus blufs, Acacias S, E 2 3,50
	E & S, W,
30,08	Intersect N, boundary at 6,00
	Cor, to Secs, 1 & 2, from which 40,00

Son true line between Secs 1 & 2,

40,08	Set Sandstone 20 x 6 x 16 ins,

Salt Lake Meridian,

15 in. deep, marked 1/4 on W. side, & raised mound of earth from 4 pits, each 24×12×12 in. for 1/4 Sec. Cor.

80.08 The cor. to Secs. 1, 2, 11 & 12,
Land broken,
Soil Gravelly,
November.

West on true line,
Declination Dec. 20 E.
Var. 15° 30' E.

3.50 Navajo trail bears N. W. & S. E.

60.00 Wash trends S. W.

40.00 Set Sandstone 16×11×5 in. in deep mkd. 1/4 on N. side & raised mound of earth from 4 pits, each 24×12×12 in. for 1/4 Sec.

Subdivision of Sec 5 Tp 21 R

Chains.	Cor.	Chains.
60,00	Mound S.E. Stake,	
80,00	Set Sandstone 14×8×5 in.	
	in ground, bevelled, on lead 2 notches	
	on E. & 3 on S. sides, mound	
	of earth from 4 pits,	
	each 24×12×12 in. for Cor. to	
	Secs. 2, 3, 10 & 11,	
	Land broken,	
	Soil 2nd rate,	
	No timber.	
		7,00
	South Bdy. of Sec. 10 & 11,	
	Var. 15° 30' E.	30,00
110,00	Set Squared Cedar Post,	40,00
	8×4×2 in. marked 1/4 S.	42,00
	on W. side, & mound	60,00
	of earth from 4 pits each	
	24×12×12 in. for 1/4 Sec. Cor.	65,50

Salt Lake Meridian.

Note.

Chains, Abandon line here on
Account of brakes,
Land broken,
Soil 2nd rate
No timber,

North on random line
between Secs. 2 & 3,
Var. 13° 30' E,
Ascend,

7,00 Top of ridge bears E. & W.
15 chs to bottom, drains S,
Descend,

30,00 Foot of ridge,

40,00 Set temporary 1/4 Sec. Cor.

42,00 Wash drains W,

60,00 Navajoe trail bears N.W.
& S.E.

65,50 Wash drains S.W.

Subdivision of Sec. 4 T. 43 S. R. 11 W.

Chains.		
73,62	Intersect Witness Cor,	Chains
80,12	Inter ect N, boundary of Sec, point to Sec, 2 & 3,	23,50
	from which,	24,50
	S, on true line returns	32,50
	Secs. 2 & 3,	
44,12	Set Stone & cedar post, 18 x 8 x 44 in. 12 in. deep, marked 1/4 S on W. side, & raised mound of earth from 4 pits, each 24 x 12 x 12 in. for 1/4 Sec Cor,	40,00
		81,00
80,12	The Cor, to Secs, 2, 3, 10 & 11,	
	Land broken,	55,50
	Soil 2nd rate,	66,00
	No timber	
		78,00
		8,00
	West on true line between Secs, 3 & 10,	

Salt Lake Meridian.

Chains	
	Var. 15°30' E,
23,50	Trail bears N. & S. in hollow, drains S,
24,50	Wash drains S,
32.50	Spur of ridge bears N. & S.
	12,50 chs,
40,00	At foot of ledge, Set Sandstone 18x8x8 in 12 in deep, marked 1/4 on N. side & raised mound of stones for 1/4 Sec. Cor,
81,00	Bank of Paria river, 50 lks wide runs S.E. Leads W.
55,50	Cross it, 50 lks wide, leads N.E,
66,00	Same runs N.E. 56 lks, wide,
78,00	Same 50 lks wide runs S.E,
80,00	Set Sandstone 14x8x5 in, 10 in. deep, marked 3 notches on E. & 5 on S. edges & mound

Subdivisions, Tp. 43, S. 6, 4th

Chains	Mounds of earth from 4 pits, each 2½ × 12 × 12 in., for Cor. to Secs. 3, 4, 9 & 10. Land broken except in bottom, level, 1st rate soil, No timber.	Chains	Note:
	South on true line between Secs. 9 & 10. Var. 15° 30' E.		
7,50	Adamsville road bears N.W. & S.E.		
15,00	Foot of bluffs bears N.W. & S.E.		
40,00	True Cor. falls in bluffs & is not set. Therefore at 15,00 chs. Set Sandstone, 25 × 10 × 3 ins., 16 ins. above ground, on W. side, marked ¼ T. 6, & scribed	40,00	

Salt Lake Meridian.

Lines, Mound of stones for W¼ Miles
¼ Sec. Cor,

Note: Abandon line here,
Land is, 15 chs, bottom, 1st
rate, balance broken, 2nd
2nd rate,
No timber,

North on random line
between Secs, 30 & 31,
Var, 15° 30' E,
To avoid 5 crossings of
the river I offset E, 10 chs,
thence N, on offset line 40
chs, thence N, 10 chs, to,
H.q.c.s, on true line, Set temporary
¼ Sec Cor, Continue N, on
offset line 80.16 chs, thence
N. 10 chs, to,

Subdivisions, Tr. 123, R. 14W.

Chains		Chains
80,16	Cor. to Secs. 3, 4, 33, & 34,	5,50
	from which,	14.70
	Birch, 20 links diam.,	10,00
	Offset bears N 60° W 10 links,	
	Set Secs 3 & 4	
0,16	Set stone 20 x 20 x 12 in.,	52,00
	marked M S, on W. side,	64,00
	mound of earth	80,00
	from which pine, 24 in. diam.,	
	bears N 60° W 12 links,	
80,16	The cor. to Secs. 3, 4, 9, & 10,	
	Quad. mutly. brs.	
	S. 1/4 Post,	
	W. 1/4 Cor.,	

West on true line.

Between Secs. 3 & 4,

Var. 15° 30' E.

Salt Lake Meridian.

Chains	
5,50	Bank chains N.W.
18,70	Road bears N.W. & S.E.
5,00	Set Sandstone 15×8×4 ins, 10 ins. deep, marked ¼ on E. side, raised mound of stones for ¼ Sec. Cor.
52,00	Bank chains N.E.
60,00	Foot of bluffs, bears N.E. & S.W.
80,00	True Cor. falling in bluffs, is not set, therefore at
60,00 chs	Set Sandstone 18×10×6 ins, 12 ins. deep, marked 4 notches on E. & 5 on S. edges W.C. & raised mound of stones for Witness Cor. to Sec. 11, S. & 9, from which,
	Aspen 12 ins. dia. bears S. 60 W. 60 lks. dist. marked S. 9, T. 13 S. R. 1 W. W.C. B.T.
	Small Cl. hardy bears

Subdivisions, Sheet 1, Tp 2 N,

		Chains.
Terminus,	Set Stone, Sds	80,12,
	W. Corner Quarter,	
	Meander,	
		80,12
	Course and Distance Line	
	Between Secs, 4 & 5,	
	Var. 15° 30' E.	
	From Witness Cor, 20 lks,	80,12
	E. of Same Cor, Iron	
	Mound, on Offset Line	
	20,00 lks, thence W. 70 lks, to	
20,10	On True Line, Set sandstone	
	15 x 10 x 8 in, 10 in, deep notched	
	4 on E. & 5 on S. edges, W. C.	
	Dressed mound of stones, for	
	Witness Cor, to Secs, 4, 5, 8 & 9,	
	Descend to	
40,00	Set Temporary Qr Sec. Cor	
62,00	Marsh Chains N.E.	

BOOK-A-153

Salt Lake Meridian.

Grass, 80,12.

Intersect at, boundary of Tp, at, Cor, to Secs 4 & 5, from which,

A, an Iron Line, bears

Secs 4 & 5;

40,12 Set Sandstone 12 x 10 x 6 ins, 9 ins, deep, marked ¼ on W, side, & raised mound of Stones for ¼ Sec, Cor,

So, 12 The Cor, Joint to Secs 4, 5, 8 & 9,

Land broken,

Soil 2nd rate,

Timber, Cedars on S, ½,

West on Iron Line

bears Secs 5 & 8,

Var, 15° 30' E,

From Witness Cor, 20, chs, to, a Stone Cor, Secs,

West on offset Line

1 500

Subdivision, Th. 23 S. R. 11 E.

Chains	40, chs, thence S, 20, chs, to
40,00	Cor common to, Sec sandstone
	16 x 6 x 6 in, 10 in, deep, marked
	10 on N, side, & raised mound
	of Earth, from 4 pits each
	24 x 12 x 12 in, for 1/4 Sec, Cor,
	from which,
	A Cedar 10 in dia, bears
	E 15 lks, dist, marked 1/4 S,
	B, T,
45,00	Canon Creek N, E, 24,00
54,00	Ridge bears N, E, & S, W,
62,50	Canon Creek N, E,
65,00	Ridge bears N, E, & S, W, 44,00
80,00	Set Sandstone 16 x 16 x 6 in,
	12 in, deep, marked 5 notches
	on E, & 5 on S, edges Mound
	mound of stones for Cor, to
	Secs, 5, 6, 7 & 8, from which
	A Cedar 6 in, dia, bears

BOOK-A-153

Sask. Lake Meridian,

N, 15 Pl, 57 Chs, Ash, marked,
S, 6, T, 43, S, R, 19 W, B.T,
Land mostly broken,
Soil Poor
Timber, Cedar,

Sask on base line
between Secs, 7 & 8,
Var, 15° 30' E,
Top of Post bears N. E. & S.W.
descending 3, inches, into Ash
Corner Chains N, E,
Iron pin, setting in Corner is
not set, Thence N. 2500
Chs, Set Planted cedar Post.
48x4 inches in diameter
marked ½ S, on W side &
round mound of earth from
4 pits, each 2½x2½ in, for
Witness ½ Sec. Cor, from which,

BOOK-

Subdivisions, Ft. W. S. K. 1 Pl.

Streets,

West on sundry lots
Ottawa Sec. 6 & 14
Tax of 1876,

35,00 Sidewalk Streets N.E.
20,00 Sidewalk Streets S.E. Cor.
25,00 Ridge Street N.E. S.W.
32,00 Sidewalk Streets N.E.
41,00 " " "
30,00 Sidewalk N. Crossing Op
Riverside, at Cor. to Sec. 5
6 & 7 from west
Cash on sundry lots
Ottawa Sec. 6 & 7,
1,500 Six Channel corner posts,
8 x 4 x 4 in, 12 in depth,
marked U.S. on 4 sides,
1 second mound of each
stone in pits, each 24 x 12 x 12
in, for U.S. Sec. Cor.
30,00 The Cor. to Sec. 5, 6, 7, 8,

BOOK-A-153

Salt Lake Meridian,

Land Districts,

Salt Lake,

Uintah,

Notice,

Is hereby given that
Survey of the lands,
described below,
will be due
U.S. Surveyor,
Utah Territory

General Description,

The surveyed portion of this Dist,
Comprises the bottom lands along
the Green river, south of
Colorado, and the timbered
hills adjoining on the East
and West. The lands are

506

agricultural.

Year 15th 1877 J. A. Samill,
U. S. Deputy Surveyor.

U. S.

Salt

The f

West

Townsh

Executed

Under

day of

examine

Planatio

surveys t

BOOK-A-153

507

U. S. SURVEYOR GENERAL'S OFFICE,

Salt Lake City, Utah, June 21st 1877

The foregoing field notes of the survey of the West & North Boundaries & Subdivisions Township No. 4 S Range No. 1 West Executed by Bailey & Bessire Under Jesuit contract of the 4th day of September 1876, in the month of March 1877, having been critically examined, the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

Nathan Kimball

Surveyor General for Utah.