BLANK
PAGE

Copied Book 169 (No. 4.)

R: 188 / BOOK-A-169

Filed July 21st 1880

Examined by T. C. Bailey

Compared by " " "

FIELD NOTES

OF

THE SURVEY OF THE

2nd Guide Meridian West from ~~between~~ 5th and 4th Standard Parallel

~~of Township No.~~ between Ranges No. 11 & 12 W. & 10 & 11 W.

of the Salt Lake Meridian in Utah Territory.

BY

Joseph Gorlinski

U. S. DEPUTY SURVEYOR,

Under his Contract No. 93.

dated June 3d 1879.

Survey commenced June 3d 1880

Survey completed June 9th 1880.

BOOK-A-169

Township 23 S. **R.** 11 W.

6	26	5	4	3	2	1
7	34	8	9	10	11	12
18	23	17	16	15	14	13
19	22	20	21	22	23	24
30	21	29	28	27	26	25
31	20	32	33	34	35	36

2nd Guide Meridian West

Tp. 25 S. bet. Rs. 11 + 12 W.

BOOK-A-169

hs. Begin at the stone, the established Standard corner to Tps. 25 ~~and 26~~ S. Rs. 11 and 12 W. The stone is standing and agrees with the description furnished me by the office, viz:— Valcanic stone 16×10×8 with mound of stones.

Thence

North on a true line between Secs. 31 + 36.

Va. 16°15' E.

0.00 Set Red sandstone, 12×8×7 in, 8 in. deep, in mound of earth + stone, marked 1/4 on W. side, with 4 pits, each 24×12×12 in. for 1/4 Sec. cor.

2.50 Shallow dry bed, 100 lks,

3 2nd Guide Meridian West
Tp. 25 S. bet. Rs. 11 + 12 W.

chs	
	wide, drains ~~[illegible]~~ NE ~~+ [illegible]~~
78.40	Small dry bed, 20 lks wide, bears NE.
80.00	Set gray sandstone, 15 x 12 x 7 in, 10 in. deep, in mound of earth + stone, marked 1 notch on S. + 5 notches on N. edges, with 4 pits, each 24 x 12 x 12 in for cor. to secs. 25. 30. 31 + 36.
	Rolling valley land, covered with shadscale, white sage, rabbit brush + grass.
	Soil 1st rate. No Timber
	North on a true line between secs. 25 + 30.
	Va. 16° 15' E.
8.50	Small dry creek, 15 lks.

chs. wide, runs N.E.

40.00 Set a flint stone, 12 x 10 x 5, 8 in. deep, in mound of earth + stone, marked 1/4 on W. side, with 4 pits, each 24 x 12 x 12 in. for 1/4 sec. cor.

80.00 Set Limestone, 12 x 11 x 6 in, 8 in. deep, in mound of stone + earth, marked 2 notches on S. + 4 notches on N. edges, with 4 pits, each 24 x 12 x 12 in. for cor. to secs. 19. 24. 25 + 30.

Rolling valley land, covered with shadscale, white sage, rabbit brush + grass.

Soil 1st rate: No Timber.

5 2nd Guide Meridian West
Tp. 25. S. bet. Rs. 11 + 12 W.

chs.	
	North on a true line between secs. 19 + 24
	Va. 16° 15' E.
14.25	Wash, 30 lks. wide, bs. NE + SW
40.00	Set a flint stone, 14 × 8 × 6 in. 9 in. deep, in mound of earth + stone, marked 1/4 on W. side, with 4 pits each 24 × 12 × 12 in. for 1/4 Sec. cor.
45.00	Dry creek, 30 lks. wide, runs SE.
65.00	Foot of mountains, bear NE + SW. Ascend.
80.00	Set a Porphyry, 18 × 12 × 10 in. 12 in. deep, in mound of stone, marked 3 notches on N. + S. Edges, pits impracticable, for corner to secs. 13. 18. 19 + 24.

2nd Guide Meridian West 6
Tp. 25 S. bet. Rs. 11 + 12 W.

BOOK-A-169

chs. Rolling land, soil 2nd rate. North ~~[illegible]~~ 15.00 chains, mountainous, soil 3rd rate.

Timber, scattered cedars.

June 3d 1880

North on a true line between Secs. 13 + 18

Va. 16°15' E.

37.60 Ravine, heads W. bears E.

40.00 Set quartzite, 16 x 12 x 6 in. 10 in deep, in mound of stone, marked 1/4 on W. side, pits impracticable, for 1/4 sec. cor, from which—

A cedar, 6 in. dia, bs. N. 25° E. 79 lks.

" " 8 in. " " N. 15° W. 47.

53.90 Ravine, heads NW. bs. SE.

57.00 " " " "

2nd Guide Meridian West
Tp. 25. S. Rs. 11 + 12 W.

chs.
80.00 Set a quartzite, 20 x 13 x 8 in.
15 in. deep, in mound of
stone, marked 4 notches
on S. + 2 notches on N. edge,
pits impracticable, for cor
to secs. 7. 12. 13 + 18, from
which, —
cedar, 12 in. dia, bs. S 40° E. 26 lks.
" 6 in " " S. 25° W. 20.
Land, mountainous
on 80.00 chains
Soil 3rd rate
Timber, cedars.

North on a true line
between secs. 7 + 12.
Va. 16° 15' E.

40.00 To a quartzite boulder,
6 x 4 x 5 feet, 4 feet deep in mound

BOOK-A-169

chs. of stones, marked 1/4 on W. side, pits impracticable, for 1/4 sec. cor. as monument

61.50 Top of mountains, bear NE + SW. Descend

80.00 Set quartzite, 25 x 16 x 8 in 10 in. deep, in mound of stone, marked 5 notches on S. + 1 notch on N. edges, pits impracticable, for cor. to secs. 1. 6. 7 + 12, from which. —

a cedar, 16 in. dia, bs. N. 15° W. 64 lks.

" " " " " N. 50° E, 42 "

Land, mountainous + rocky. on 80 chains

Soil, 3rd rate

Timber, cedars.

2nd Guide Meridian West
T. 25. S. bet. Rs. 11 & 12 W.

North on a true line between secs. 1 & 6.

Va. 16° 15' E.

34.25 Deep, rocky gulch, heads S.E. bears N.W.

40.00 Set quartzite rock, 16x10x6 in. 10 in. deep, in mound of stone, marked 1/4 on W. side, pits impracticable, for 1/4 sec. cor.

80.00 Set quartzite rock, 30 x 12 x 12 in. 22 in. deep, in mound of stone, marked 6 notches on N. S. E & W. edges, pits impracticable, for cor. to T. ps. 24 & 25 S. Rs. 11 & 12 W.

Sand, mountainous. op 80 chains

Soil 3rd. rate

Timber, scattered cedars.

2nd Guide Meridian West
Tp. 25 S. bet. Rs. 11 + 12 W.

10

BOOK-A-169

General Description

The land along this portion of the Meridian, consists of valley, rolling, land, of 1st + 2nd rate, on the South, adapted for cultivation, Northern part is mountainous, rocky, Soil 3rd rate, Timber, cedars.

The country rock is quartzite, no mineral found.

2nd Guide Meridian West
Tps. 24. S. bet. Rs. 11 + 12 W.

chs.	
	North on a true line between secs. 31 + 36
	Va. 16° 15' E
10.00	Ravine ~~[illegible]~~ drains SW.
40.00	Set red sandstone, 16 x 10 x 8 in 10 in. deep, in mound of stones, marked 1/4 on W. side, pits impracticable, for 1/4 sec. cor.
48.00	Wash in gulch bs. SE bs. NW.
80.00	Set red sandstone, 14 x 10 x 4 in. 9 in. deep, in mound of stone, marked 1 notch on S. + 5 notches on N. edges, pits impracticable, for cor. to secs. 25. 30. 31 + 36.
	Land, mountainous on 80 chains
	Soil 3rd rate
	No Timber

2nd
Tps
chs.
40.00
44.20
54.50
65.00
" "
80.00

BOOK-A-169

Township 21 S **R.** 11 W

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

2nd Guide Meridian West
Tp. 24. S. bet. Rs. 11 + 12 W.

BOOK-A-169

chs. North on a true line between Secs. 25 + 30
Va. 16° 15' E

40.00 Set triangular sandstone, 24 x 12 x 5 in. 18 in. deep, in mound of stone + earth, marked 1/4 on W. side, with 4 pits each, 24 x 12 x 12 in. for 1/4 sec. cor. At this corner, I have mountains + enter bench land.

44.20 Road to Silver Park Mines, bears NE + SW.

54.50 Bench slope, NE + SW.

65.00 Wash at foot of bench, 30 lks. wide, ~~bears~~ drains SW.

" " Enter valley.

80.00 Set grey sandstone, 16 x 10 x 9, 10 in. deep, in mound of stone + earth, marked 2

13 2nd Guide Meridian West
Tp. 24. S. bet. Rs. 11+12 W.

chs. notches on S + 4 notches on N. edges, with 4 pits, each 24×12×12 in. for cor. to secs. 19. 24. 25 + 30.

South 40.00 chains mountainous
Soil 3rd rate.
North 1/2, bench + valley land
Soil 2nd rate.
No timber.

North on a true line between secs. 19 + 24
Va. 16° 15' E.

40.00 Set sandstone, 12×8×5 in. 8 in. deep, in mound of earth + stone, marked 1/4 on W. side, with 4 pits each 24×12×12 in. for 1/4 sec. cor.

2nd
Tp.
chs.
80.00
40.00

2nd Guide Meridian West 14

Tp. 24. S. bet. Rs. 11 & 12 W.

BOOK-A-169

chs.

80.00 Set limestone 17 x 10 x 8 in. 12 in deep in mound of earth & stone, marked 13 notches on N & S edges, with 4 pits, each 24 x 12 x 12 in. for cor. to sec. 13. 18. 19. 24.

Rolling valley land
Soil 2nd rate
No timber.

North on a true line between sec. 13 & 18
Va. 16° 15' E.

40.00 Set a sandstone, 11 x 9 x 6 in. 7 in. deep, in mound of earth & stone, marked 1/4 on W. side, with 4 pits,

2nd Guide Meridian West
Tp. 24 S. bet. Rs. 11 + 12 W.

chs.	
	each 24 x 12 x 12 in. for 1/4 sec. cor.
80.00	Set sandstone, 13 x 10 x 9 in. 8 in. deep, in mound of earth + stone, marked 4 notches on S. + 2 notches on N. edges, with 4 pits, each 24 x 12 x 12 in. for cor. to secs. 7. 12. 13 + 18
	Valley land
	Soil 2nd rate
	No timber
	North on a true line between secs. 7 + 12.
	Va. 16° 15' E.
17.20	Dry bed from Sevier lake, ~~[illegible]~~ drains NW ~~[illegible]~~

BOOK-A-169

chs.	
25.00	Dry margin of Sevier Lake, NE & SW.
35.00	Across the same, bearing NW. & SE.
40.00	Set a Salt Rock, 13 x 8 x 6 in 8 in. deep, in mound of earth, marked 1/4 on W. side, with 4 pits, each 24 x 12 x 12 in. for 1/4 sec. cor.
45.00	Enter dry Lake bed, NE & SW
70.00	Island, 5 chs. wide, NE & SW
75.00	Leave island. Enter dry Lake
80.00	Set a Salt Rock, 14 x 8 x 6 in. 9 in. deep. in mound of earth, marked 5 notches on S. & 1 notch on N. edges, with 4 pits, each 24 x 12 x 12 in. for cor. to secs. 1. 6. 7 & 12

172nd Guide Meridian West
Tp. 24. S. bet. Rs. 11 + 12 W.

chs.		Off T.
	The land on S. end and E. of the line is level, 2nd rate. On the W. is covered by dry alkali bottom of Sevier Lake. June 4th 1880.	chs. 7.00 40.00
	Finding it impracticable to continue this Meridian further North from this corner, on account of miry, alkali flats and close proximity of Sevier Lake, I run — on offset line, East on a true line between secs. 6 + 7 in Tp. 24. S. R. 11. W.	64.25 69.00 80.00

Offset for 2nd Guide Meridian West
T. 24. S. R. 11 W. Subdivision

BOOK-A-169

chs.	Va. 16° 15' E.
7.00	Leave dry Lake. Enter valley.
40.00	Set a sandstone, 13 x 8 x 6 in. 8 in. deep, in mound of earth, marked 1/4 on N. side, with 4 pits, each 24 x 12 x 12 in. for 1/4 sec. cor.
64.25	Dry creek, runs NW.
69.00	Leave dry creek.
80.00	Set white sandstone, 12 x 10 x 4 in. 8 in. deep, in mound of earth, marked 5 notches on S. & E. edges, with 4 pits, each 24 x 12 x 12 in. for cor. to Secs. 5. 6. 7 & 8.

Rolling land, covered with bunch grass.

Soil 2nd rate.

No timber.

19 Offset for 2nd Guide Meridian West
T. 24. S. R. 11. W. Subdivision

chs		Offset Subd chs.
	Thence —	
	North on a true line between Secs. 5 + 6	
	Va. 16°15' E.	
8.50	Enter Hollow, ~~[illegible]~~ draining NW ~~+ SE~~	9.25
14.50	Leave " " " "	
40.00	Set a red Sandstone, 13×8 ×5 in, 8 in. deep, in mound of earth, marked 1/4 on W. side, with 4 pits, each 24×12×12 in, for 1/4 sec. cor.	40.00
80.00	Set a Red Sandstone, 14×9×6. 9 in. deep, in mound of earth, marked 1 notch on W + 5 notches on E. edges, with 4 pits, each 24×12×12 in. for cor. to secs. 5. 6. 31 + 32 on N. boundary of the Tp.	70.75
	Rolling land, with bunch grass.	80.00
	Soil 2nd rate No timber	

Offset for 2nd Guide Meridian West 20
Subdivision T. 23 S. R. 11. W.

BOOK-A-169

Chs. Thence —

North on a true line between secs. 31 & 32.

Va. 16° 15' E.

9.25 Dry bed, 30 lks. wide, drains bears NW ~~SE~~.

40.00 Set a Salt Rock, 13 x 8 x 5 in. 8 in. deep, in mound of Earth, marked 1/4 on W. side, with 4 pits, each 24 x 12 x 12 in. for 1/4 Sec. Cor.

70.75 Dry bed, 20 lks. wide, drains ~~bears~~ NW ~~SE~~

80.00 Set a Salt Rock, 14 x 10 x 4 in. 9 in. deep, in mound of Earth, marked 1 notch on S. and 5 notches on E. edges, with 4 pits, each 24 x 12 x 12 in. for Cor. to Secs. 29. 30. 31 & 32

Lake Shore 6.00 chs. West.

Offset for 2nd Guide Meridian West
T. 23. S. R. 11. W. Subdivision

Chs.	
	Low valley land
	Soil 1st rate. Bunch grass
	No Timber.

Thence
North on a true line
between Secs. 29 + 30.
Va. 16° 15' E

Chs.	
40.00	Set sandstone, 14 x 7 x 6 in. 9 in. deep, in mound of stones and earth, marked 1/4 on W. side, with 4 pits, each 24 x 12 x 12 in. for 1/4 Sec. Cor.
59.50	Wash, 50 lks. wide, ~~[illegible]~~ drains NW ~~[illegible]~~
80.00	Set Blue Sandstone, 16 x 8 x 5 in. 10 in. deep, in mound of earth marked 2 notches on S. and 5 on E. edges, with 4 pits, each

Offset
Sec
Chs.
1.75
40.00
80.00

Offset for 2nd Guide Meridian West
Subdivision T. 23 S. R. 11 W.

BOOK-A-169

chs. 24 x 12 x 12 in. for cor. to secs. 19. 20. 29. + 30. —
Low valley land
Soil 1st rate
No timber. —
Lake about 25 chs W. of line

Thence —
North on a true line between Secs. 19 + 20
Va. 16° 15' E.

1.75 Wash, 20 lks mdy, bears NE + SW.

40.00 Set Blue sandstone, 10 x 8 x 6 in, 6 in. deep, in mound of earth, marked 1/4 on W. side, with 4 pits, each 24 x 12 x 12 in. for 1/4 sec. cor

80.00 Set Sandstone, 10 x 8 x 6 in, 6 in. deep, in mound of earth,

Offset for 2nd Guide Meridian West
Subdivision T. 23 S. R. 11 W.

chs.	marked 3 notches on S. + 5 notches on E. edges, with 4 pits, each 24 x 12 x 12 in. for cor. to Secs. 17. 18. 19 + 20	chs.
	Lake about 30 chs. W.	80.00
	for valley land	
	Soil 1st rate	
	No Timber.	
	Thence North on a true line between Secs. 17 + 18. Va. 16° 15' E.	
40.00	Set sandstone, 13 x 10 x 5 in. 8 in. deep, in mound of stone + earth, marked 1/4 on W. side, with 4 pits, each 24 x 12 x 12 in. for 1/4 sec. cor.	3.00
		21.50

Offset for 2nd Guide Meridian West
Subdivision T. 23. S. R. 11. W.

BOOK-A-169

chs.

80.00 Set sandstone, 10 x 8 x 6 in. 6 in. deep, in mound of earth, marked 4 notches on S. & 5 notches on E. edges, with 4 pits, each 24 x 12 x 12 in. for cor. to secs. 7. 8. 17 & 18.

Lake about 30 chs. W of line

Valley land

Soil 1st rate. Bunch grass

No Timber.

Thence

North on a true line between secs. 7 & 8.

Var. 16° 15' E.

3.00 Wash, ~~[illegible]~~ drains NW

21.50 " " " "

OFFSET FOR 2nd GUIDE MERIDAN WEST.

25

SUBDIVISION T. 23. S. R. 11. W.

CHS.		CHS.
40.00	Set sandstone, 10 x 8 x 6 in. 6 in. deep, in mound of earth, marked 1/4 on W. side, with 4 pits, each 24 x 12 x 12 in. for 1/4 sec. cor.	14.50 40.00
80.00	Set sandstone, 12 x 8 x 6 in. 8 in. deep, in mound of earth, marked 5 notches on S. and E. edges, with 4 pits, each 24 x 12 x 12 in. for cor. to secs. 5. 6. 7 + 8.	50.00 80.00
	Broken valley land Soil 2nd rate No timber Lake shore about 30 chs. W.	

OFFS
B001
SUBD

CHS.	
	Thence
	North on a true line
	between secs. 5 + 6
	Va. 16° 15' E.
14.50	Wash, ~~[illegible] NE +~~ drains SW.
40.00	Set a sandstone, 10×10×8 in.
	6 in. deep, in mound of
	earth, marked 1/4 on W.
	side, with 4 pits, each 24×12
	×12 in. for 1/4 sec. cor.
50.00	Wash, 1 ch. wide, ~~[illegible] E +~~ drains W.
80.00	Set a charred cedar post, 4 ft. long
	4×4 in. square, in mound
	of earth from 4 pits, each
	24×12×12 in. marked 1 notch
	on W. + 5 notches on E.
	edges for corner to secs.
	5. 6. 31 + 32 on N. boundary
	of the Tp. —
	Broken valley land

Offset for 2nd Guide Meridian West
27 Subdivisions. T. 23. R. 11 W.

BOOK

chs. Soil 2nd rate
No Timber.
Lake shore about 25 chs. W.
June 5th 1880.

General Description

The land along the Guide Meridian, through T. 24. S. R. 11. W. is in the southern part mountainous & bench with 2nd & 3rd rate soil. In the North the land lays in the valley & reaches Seven Lake. The soil is 2nd rate, and not adapted for cultivation. No timber in immediate vicinity.

The land along the

BOOK-A-169

Meridian offset in T. 23 S. R. 11 W. consists of low valley lying along the Lake shore. The soil is mostly 1st rate, except in the Northern part, where the land is broken, the soil is 2nd rate.

There is considerable bunch grass in this Township. No timber whatever.

Offset for 2nd Guide Meridian West
S. Boundary T. 22. S. R. 11. W.

chs.		Offs S. B chs.
	From cor. to secs. 5.6.31 + 32. on S. boundary of the Tp. I run — East on a true line between secs. 5 + 32. Ta. 16° 15' E.	
40.00	Set a sandstone, 17 x 8 x 5 in. 11 in. deep, in mound of stone + earth, marked 1/4 on N. side, with 4 pits, each 24 x 12 x 12 in. for 1/4 sec. cor.	40.00
50.50	Wash, ~~beans~~ drains N ~~+ S.~~	
80.00	Set a sandstone, 14 x 8 x 8 in. 10 in. deep, in mound of earth + stone, marked 2 notches on W. + 4 notches on the E. edges, with 4 pits, each 24 x 12 x 12 in. for cor. to secs. 4.5.32 + 33. Valley land	52.00 80.00

Offset for 2nd Guide Meridian West
S. Boundary T. 22. S. R. 11. W.

BOOK-A-169

chs. covered with bunch grass.
Soil 1st rate
No timber

Thence—
East on a true line
between Secs. 4 and 33.
Va. 16°15' E.

40.00 Set a lime stone, 14×10×4 in, 9 in deep, in mound of stone + earth, marked 1/4 on N. side, with 4 pits, each 24×12×12 in. for 1/4 sec. cor.

52.00 bench land bears N.E. + S.W.

80.00 Set a lime stone 15×9×6 in. 10 in. deep, in mound of stone + earth, marked

Offset for 2nd Guide Meridian West — Offset
S. boundary, T. 22 S. R. 11 W. — S. bou

chs. — chs.

9 notches on E and W. edges, with 4 pits, each 24×12×12 in. for cor. to secs. 3. 4. 33 + 34.

East ½, valley land — 57.00

Soil 1st rate. — 80.00

West ½. bench land

Soil 2nd rate

No timber.

Thence —

East on a true line between secs. 3 + 34

Va. 16° 15' E.

7.50 Foot of Beaver Range Mountains, bear NE + SW.

32.50 A gulch, ~~bear~~ drains NW ~~[illegible]~~.

40.00 Set limestone, 13×10×9 in. 8 in. deep, in mound of

Offset for 2nd Guide Meridian West
BOOK-A-169
S. boundary T. 22. S. R. 11. W.

chs.	
	stone and earth marked 1/4 on N. side with 4 pits, each 24×12×12 in. for 1/4 sec. cor.
57.00	Top of ridge bears NE & SW.
80.00	Set a limestone, 15×12×9 in. 10 in. deep, in mound of stone, marked 4 notches on W. and 2 notches on E. edges, pits, impracticable, for cor. to secs. 2. 3. 34 & 35.

Land, mountainous on 72.50 chs

Soil 3rd rate

Few scattered cedars.

Thence —

East on a true line between secs. 2 & 35

Va. 16° 15' E.

33 Offset for 2nd Guide Meridian West
S. Boundary T. 22. S. R. 11. W.

chs.		chs.
10.50	Ravine, ~~[illegible]~~ drains NW ~~[illegible]~~.	
40.00	Set a limestone, 16x12x10 in. 10 in. deep, in mound of stone, marked 1/4 on N. side, pits impracticable, for 1/4 sec. cor.	28.00
		40.00
55.00	Top of mountain, bears N + S.	
80.00	Set a limestone, 16x10x9 in. 10 in. deep, in mound of stone, marked 5 notches on W. edge and 1 notch on E. edges, pits impracticable, for cor. to Secs. 1. 2. 35 + 36.	62.00
		80.00
	Land, mountainous on 80 chains Soil 3rd rate + rocky Few scattered cedars.	

Offset for 2nd Guide Meridian West
S. Boundary T. 22. S. R. 11. W.

BOOK-A-169

chs. Thence —

East on a true line between secs. 1 & 36.

Va. 16° 15' E.

28.00 Gulch, ~~bears NE &~~ drains SW.

40.00 Set a limestone, 14 x 12 x 10 in. 9 in deep, in mound of stones, marked 1/4 on N. side, pits impracticable, for 1/4 sec. cor.

62.00 Hollow, 2.50 chs. wide, bears NE & SW.

80.00 Set a limestone, 15 x 13 x 8 in. 10 in deep, in mound of stones, marked 6 notches on N. S. E and W. edges. pits impracticable, for cor. to Tps. 22 and 23. S. Rs. 10. and 11. W, on 2nd Guide Meridian West.

Land; high, mountainous

Offset for 2nd Guide Meridian West
S. boundary T. 22. S. R. 11. W.

BOOK

chs and rocky. on 80 chains
Soil, 3rd rate.
timber, scattered
cedars.

June 7th 1880.

General Description

The land along this Township Boundary, consists of valley in the West, partly embracing the low lands along the Lake. In the East, the country is mountainous & rocky, the Beaver River range intersecting the line.

There is considerable bunch grass in the W. the soil being 1st rate. In the East the soil is 3rd & 2nd rate. There are some

BOOK-A-169

cedars, scattered about.

The country rock is chiefly limestone. No mineral indications seen.

CHS.

From Standard Cor. to Tps. 22 + 23 S.
RS. 10 + 11 W,
I run —
North on a true line
between secs. 31 + 36.
Va. 16° 15' E.

24.50 Hollow, 3 chs. wide ~~[illegible]~~ drains W.

40.00 Set a limestone, 14 X 12 X 9 in.
9 in. deep, in mound of stone,
marked 1/4 on W. side, feits
impracticable, for 1/4 sec. cor.

57.00 Gulch, ~~[illegible]~~ drains W ~~[illegible]~~.

80.00 Set a limestone, 15 X 10 X 8 in.
10 in. deep, in mound of
stones, marked 1 notch on
S. and 5 notches on N. edges,
feits impracticable, for cor.
to secs. 25. 30. 31 + 36.
on 80 chains
Land mountainous + rocky.
Soil 3rd rate. Some cedars.

CHS.

19.00

35.00

40.00

68.00

80.00

CHS.

Thence —

North on a true line between secs. 25 + 30.

Va. 16° 15' E.

19.00 Gulch, drains ~~[illegible]~~ SW.

35.00 Top of mountain, bears NE + SW.

40.00 Set a limestone, 16 x 13 x 7 in. 10 in. deep, in mound of stone, marked 1/4 on W. side, pits impracticable, for 1/4 sec. corner.

68.00 Ravine, drains ~~bears~~ NW ~~[illegible]~~

80.00 Set a limestone, 14 x 12 x 10 in. 9 in. deep, in mound of stone, marked 2 notches on S. and 4 notches on N. edges, pits impracticable, for cor. to secs. 19. 24. 25 + 30.

Land, mountainous + rocky on 80 chains

Soil 3rd rate. A few cedars.

chs. Thence —

North on a true line between secs. 19 + 24

Va. 16° 15' E.

14.00 Ravine, ~~bears~~ drains NW ~~+SE~~.

29.00 Top of ridge bears NE + SW.

40.00 Set a limestone, 14 x 9 x 8 in. 10 in. deep, in mound of stones, marked 1/4 on W. side, pits impracticable, for 1/4 sec. cor.

57.50 Gulch, ~~bears E+~~ drains W.

80.00 Set a limestone, 14 x 9 x 6 in. 9 in. deep, in mound of stones, marked 3 notches on N + S. edges, pits impracticable, for cor. to secs. 13. 18. 19 + 24.

Land mountainous

Soil 3rd rate, scattered cedars

2nd
T. 2

chs.

40.00

72.00

80.00

chs. Thence

North on a true line between secs. 13+18.

Va. 16°15' E.

40.00 Set a limestone, 16×11×8 in. 10 in. deep, in mound of stones, marked 1/4 on W. side, pits impracticable, for 1/4 sec. cor.

72.00 Ridge, bears NE+SW.

80.00 Set a limestone, 15×13×9 in. 10 in. deep, in mound of stone, marked 4 notches on S. and 2 notches on N. edges pits impracticable, for cor. to secs. 7.12.13+18.

Land, mountainous N. 80. chs

Soil 3rd rate

Scattered scrub cedars.

2nd Guide Meridian West
T. 22. S. between Rs. 10 and 11 W.

chs.		chs.
	Thence	
	North on a true line between secs. 7 + 12	
	Va. 16° 15' E.	
15.75	Gulley, ~~bears E.~~ drains W.	
40.00	Set a limestone, 15 X 8 X 5 in. 10 in. deep, in mound of stone, marked 1/4 on W. side, pits impracticable, for 1/4 sec. cor.	
46.00	Foot of Mountains, bear NE + SW. Enter bench land	23.25 40.00
80.00	Set a sandstone, 15 X 9 X 5 in. 10 in. deep, in mound of stone, pits impracticable, marked 5 notches on S. and 1 notch on N. edges, for cor. to secs. 1, 6, 7 + 12	80.00
	South 46.00 chains mountainous	
	Soil 3rd rate	

T. 22. S. between Rs. 10 + 11 W.

BOOK-A-169

chs. North 1/2, bench

Soil 2nd rate

No timber.

Thence —

North on a true line

between secs. 1 + 6

Va. 16°15' E.

23.25 Gulley, ~~bear~~ drains NW ~~+ SE~~.

40.00 Set a sandstone, 15 x 10 x 6 in.

10 in. deep, in mound of

stone, marked 1/4 on W.

side, pits impracticable

for 1/4 sec. cor.

80.00 Set a sandstone, 24 x 6 x 6 in.

in mound of stone + earth,

18 in. deep, marked 6 notches

on N. S. E + W. edges, with

2nd Guide Meridian West
43 T. 22 S. bet. Rs. 10 + 11 W.

chs. 4 pits, each 24 x 12 x 12 in.
for cor. to Tps. 21 + 22 S.
Rs. 10 and 11 W.
Beach, grassy land.
Soil 2nd rate
No timber
June 8th 1880.

General Description

The land along this portion of the Guide Meridian is all covered by the Beaver Range of Mountains, except the Northern End, which lies on the beach
Mountain land is rocky + unfit for

BOOK-A-169

cultivation.

Bench land, 2nd rate, adapted only for grazing purposes.

All that portion of land, in this township, bordering on Seven Lake consists of 1st rate quality soil, covered with bunch grass.

There are some scattered cedars all through the mountains. No mineral found.

2nd Guide Meridian West
45 T. 21. S. between Rs 10 and 11 W.

chs.	
	North on a true line between bet. secs. 31 + 36 Va. 16° 15' E.
15.00	Enter rolling valley, bears NE + SW.
40.00	Set a sandstone, 14 x 6 x 5 in. 10 in. deep, in mound of earth + stone, marked 1/4 on W. side, with 4 pits, each 24 x 12 x 12 in. for 1/4 sec. cor.
80.00	Set a sandstone, 14 x 8 x 5 in. 10 in. deep, in mound of earth + stone, marked 1 notch on S. and 5 notches on N. edges, with 4 pits, each 24 x 12 x 12 in. for cor. to secs. 25. 30. 31 + 36.
	Rolling land
	Soil 2nd rate. No Timber

BOOK A-169

Township 21 S **R.** 11 W

6	5	4	3	2	1	51
7	8	9	10	11	12	50
18	17	16	15	14	13	48
19	20	21	22	23	24	47
30	29	28	27	26	25	46
31	32	33	34	35	36	45

Townsh

168	6	
167	7	
165	18	
164	19	
163	3	
162		

BOOK-A-169

Thence —
North on a true line
between Secs. 25 and 30.
Va. 16°15' E.

18.00 Gulley, 30 lks. wide, ~~[illegible]~~ drains NW ~~[illegible]~~.

40.00 Set a sandstone, 13x9x6 in.
8 in. deep, in mound of
stone + earth, marked 1/4
on W. side, with 4 pits, each
24x12x12 in, for 1/4 sec. cor.

51.50 Gulley, 20 lks. wide, ~~[illegible]~~ drains SW.

80.00 Set a sandstone 16x10x6 in.
10 in. deep, in mound of
stone and earth, marked
2 notches on S. and 4 notches
on N. edges, with 4 pits, each
24x12x12 in. for cor. to Secs.
19. 24. 25 + 30.

Rolling land

chs Soil 2nd rate
No timber

Thence
North on a true line
between secs. 19 + 24.
Va. 16°15' E.

40.00 Set a red sandstone, 14 x 6 x 5 in, 9 in. deep, in mound of stone + earth, mark 1/4 on W. side, with 4 pits, each 24 x 12 x 12 in. for 1/4 sec. cor.

50.50 Top of bench, bears NE + SW.

75.00 Head of gulch, bears North.

80.00 Set sandstone 15 x 10 x 5 in 10 in. deep, in mound of earth + stone, marked 3 notches on N + S. edges

BOOK-A-169

chs. with 4 pits, each 24 x 12 x 12 in.
for cor. to secs. 13.18.19 + 24
Sand, rolling
Soil 2nd rate
No Timber

Thence
North on a true line
between secs. 13 + 18
Va. 16° 15' E.

12.00 Leave gulley, ~~bears NE + SW~~ drains
35.00 Same " " NW ~~+ SE~~.
Enter level valley, bears
NE + SW.
40.00 Set a sandstone, 14 x 8 x 6 in.
10 in. deep, in mound of
earth, marked 1/4 on W.
side, with 4 pits, each

149 2nd Guide Meridian West
T. 21. S. bet. Rs. 10 + 11 W.

chs.	
	24 X 12 X 12 in, for 1/4 sec. corner.
78.00	Wash, 20 lks. wide, ~~[illegible]~~ drains [illegible]
80.00	Set a sandstone, 12 X 9 X 5 in. 8, in deep, in mound of earth, marked 4 notches on S. and 2 notches on N. edges, with 4 pits, each 24 X 12 X 12 in, for cor. to secs. 7. 12. 13 + 18
	South 1/2, rolling bench Soil 2nd rate
	North 1/2, level valley Soil 1st rate
	No timber.

2nd Guide Meridian West
T. 21. S. bet. Rs. 10 & 11 W.

chs. BOOK-A-169 Thence
North on a true line
between secs. 7 & 12
Va. 16° 15' E.

40.00 Set a sandstone, 16 x 6
x 6 in. 10 in. deep, in mound
of earth, marked 1/4 on
W. side, with 4 pits, each
24 x 12 x 12 in. for 1/4 sec. cor.

80.00 Set a sandstone, 12 x 10 x 5 in.
8 in. deep, in mound of
stone & earth, marked
5 notches on S. and 1 notch
on N. edge, with 4 pits,
each, 24 x 12 x 12 in, for cor.
to secs. 1. 6. 7 & 12.

Level valley
Soil 1st rate
No timber

2nd Guide Meridian West
T. 21. S. Est. Rs. 10 + 11 W.

chs. North on a true line between Secs. 1 + 6.

Va. 16° 15' E.

6.00 Eastern Margin of Dry, alkali bottom of Lower Lake, bears NE + SW.

40.00 Set a Salt rock, 12 x 8 x 5 in. 8 in. deep, in mound of earth, marked 1/4 on W. side, with 4 pits, each 24 x 12 x 12 in. for 1/4 Sec. cor, in alkali flat of the lake.

58.55 Intersect 4th Standard Parallel South, 29.60 chs. N. from point at Standard Corner to Township 20 South Ranges 10 and 11 West on said Standard, previously established, This point being in a miry bottom

BOOK-A-169

of alkali, I found it impracticable to establish the closing corner, with any monument, I therefore connected the same, by actual measurement, with the W. C. (witness corner) stone, previously established by me on said Standard Line at the Eastern Margin of Sevier Lake; which connection I found to be East 62.60 chains to said Witness Corner. —

Land Alkali flat + saleratus bottoms of the Lake. Neither vegetation nor timber. —

June 9th 1880.

BOO

General Description

The land along this portion of the Meridian, is in the South ½, rolling bench, having 2nd rate soil, not adaptice for cultivation. The North ½ consists of level valley bordering on the Lake, except in the last mile, where the land lies in the alkali bottom of the Lake.

The soil is 1st rate

There is no timber along this line.

Joseph Gorlinski
U.S. Deputy Surveyor

BOOK-A-169

54

U. S. SURVEYOR GENERAL'S OFFICE,

Salt Lake City, Utah, Aug 14 1880

The foregoing field notes of the survey of the

2d Guide Meridian West, between Ranges 11 & 12 & 10 & 11 W.

~~*Township No* *Range No*~~

of the Salt Lake Meridian, Utah Territory,

Executed by Joseph Gorlinski

Under his *contract No* 93

of the 3d *day of* June 1879,

in the month of June 1880,

having been critically examined, the necessary corrections and explanations made, the said field notes, and the surveys they describe are hereby approved.

Frd. Salomon

U. S. Surveyor General for Utah.

compared copied Book 169 (No 5)

R: 1881

55

BOOK-A-169

Filed July 21st 1880

Examined by T. C. Bailey

Compared by " " "

FIELD NOTES

OF

THE SURVEY OF THE

North boundary

of Township No. 22 S., Range No. 11 W.

of the Salt Lake Meridian in Utah Territory.

BY

Joseph Gorlinski

U. S. DEPUTY SURVEYOR,

Under his Contract No. 93.

dated June 3d 1879.

Survey commenced June 10th 1880.

Survey completed June 10th 1880.

BOOK-A-169

North boundary T. 22 S. R. 11 W.

Chs. From the established standard corner to Townships 21 and 22 South Ranges 10 and 11 West on the 2nd Guide Meridian West ~~East~~ I run.

West on a true line between sections 1 and 36.

Va. 16° 15' E.

40.00 Set a sand stone 16X10X5 in. - 10 in. deep, marked 1/4 on the north side, in mound of earth, from 4 pits, each 24X12X12 in. for 1/4 sec. cor.

80.00 Set a grey sand stone 14X11 X9 in. 10 in. deep, marked 1 notch on the east and 5 notches on the west edges, in mound of earth, from 4 pits, each 24X12X12 in. for corner to sections 1. 2. 35 and 36.

57 North Boundary T. 22 S. R. 11 E.

Chs. Level valley grassy land
Soil 1st rate.
No timber.

---

thence
West on a true line
between sections
2 and 35.
Va. 16° 15' E.

40.00. Set a sandstone 14x9x5
in 10 in. deep, marked 1/4
on the north side, in mound
of earth, from 4 pits each
24x12x12 in. for 1/4 sec.
cor. near the Eastern
margin of dry bottoms
of Sevier Lake. bearing

BOOK-A-169

North Boundary. T. 22 S. R 11 W.

N. E. and S. W.

Valley land bordering on Sevier Lake.

Soil 1st rate

No timber.

The line further west is impracticable on account of the lake.

N. B. For general description see field notes of the survey of subdivision lines in said township.

Joseph Gorlinski
U. S. Dep. Surveyor.

BOOK-A-169

57

U. S. SURVEYOR GENERAL'S OFFICE,

Salt Lake City, Utah, Aug 14 *1880*

The foregoing field notes of the survey of the

fractional N. boundary of

Township No 22 S. *Range No* 11 W.

of the Salt Lake Meridian, Utah Territory,

Executed by Joseph Gorlinski

Under his *contract No* 93

of the 3 *day of* June *1879*

in the month of June *1880,*

having been critically examined, the necessary corrections and explanations made, the said field notes, and the surveys they describe are hereby approved.

Fred. Salomon

U. S. Surveyor General for Utah.

BOOK-A-169 copied (No. 6)
R: 1881

Filed July 21st 1880.

Examined by F. C. Bailey

Compared by " " "

FIELD NOTES

OF

THE SURVEY OF THE

Subdivision lines

of Township No. 22 S., Range No. 11 W.

of the Salt Lake Meridian in Utah Territory.

BY

Joseph Gorlinski

U. S. DEPUTY SURVEYOR,

Under his Contract No. 93.

dated June 3d. 1879.

Survey commenced June 11th 1880.

Survey completed June 13th 1880.

BOOK-A-169

Township 23 S. **R.** 11 W.

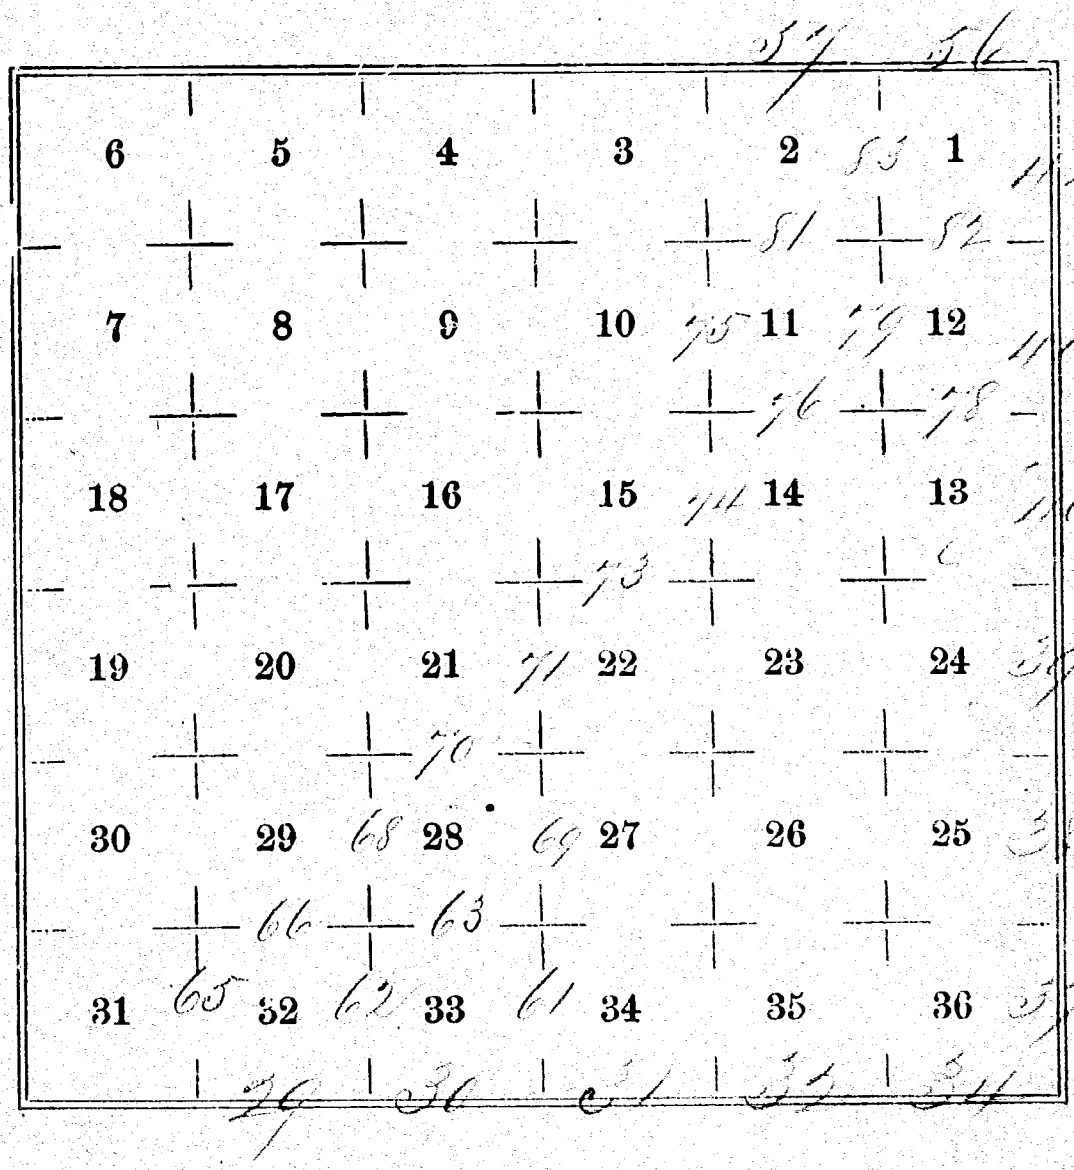

BOOK-A-169

Subdivision T. 22 S. R 11 W.

Obs. From the established corner to sections 33. 34. 3 and 4 in the South boundary of the township. I run,

North on a true line, between sections 33 and 34.

Va. 16° 15' E.

35.00 leave bench entering valley land bearing NE and S.W

40.00 Set a limestone 16 X 8 X 6 in. 10 in. deep, marked 1/4 on the west side, with 4 pits each 24 X 12 X 12 in. in mound of earth for 1/4 sec. cor.

80.00 Set a sand stone 14 X 8 X 5 in. 9 in. deep, marked 1 notch on the south, and 3 notches on the east edges, in mound of earth from 4 pits each 24 X 12 X 12 in. for corner to sections 27. 28. 33

Subdivision T. 22 S. R 11 W

Chs. and 34, near mountain on the ea

Bench and valley rolling grassy land. Soil 2nd rate No timber —

From corner to sections 32 33. 4 and 5 in the south boun ary of the township I run,

North on a true line between sections 32 and 33

Va. 16° 15' E.

40.00 Set a limestone 14 X 8 X 7 in 9 in. deep. marked 1/4 on the we side with 4 pits each 24 X 12 X 12 in. for 1/4 sec. cor. in mou of earth.

46.25. Wash 25 links wide drains ~~[illegible]~~ N.W. ~~and S.E.~~

BOOK-A-169

Subdivision T. 22 S. R 11 W

Chs.

80.00 Set a Salt Rock 12 x 10 x 6 in. 8 in. deep. marked 1 notch on the south and 4 notches on the east edges, in mound of earth from 4 pits, each 24 x 12 x 12 in. for corner to sections 28. 29. 32 and 33.

Level valley grassy land Soil 1st rate. no timber

---

thence

East on a random line between sections 28 and 33.

Va. 16° 15' E.

40.00. Set a stone for temporary 1/4 sec. cor.

80.38. Intersect the N. and S. line

Subdivision T. 22 S. R. 11 W

Bhs. 16 links north from corner to sections 27. 28. 33 and 34; from which corner I run.
N. 89° 53' W on a true line between sections 28 and 33.

40.19 Set a black rock 12 X 8 X 6 in 8 in. deep marked 1/4 on the north side, in mound of earth from 4 pits each 24 X 12 X 12 in. for 1/4 sec. cor.

80.38. The corner to sections 28. 29. 32 and 33.

Level valley land - mix grass. Soil 1st rate
No timber.

BOOK-A-169

Subdivision T. 22 S. R. 11 W.

Chs. From the established corner to sections 31. 32. 5 and 6 on the south boundary of the township.

I run.

North on a true line between sections 31 and 32

Va. 16° 20' E.

40.00 Set a Salt Rock 12 X 8 X 6 in. 8 in. deep, marked 1/4 on the west side, in mound of earth, from 4 pits each 24 X 12 X 12 in. for 1/4 sec. cor.

62.50 dry margin of Senica Lake bears N.E. and S.W. and enter alkali bottoms

80.00 Set a Salt Rock 13 X 10 X 6 in. 8 in. deep, in dry bottoms of the Lake, marked 1 notch on the south, and 5 notches on the

Subdivision T. 22 S. R 11 W

Chs. east edges, in mound of earth, from 4 pits each 24 x 1[illegible] x 12 in. for corners to sections 29. 30. 31 and 32.

Level valley and bottom land with grass. Soil 1st rate. North end Alkali lake dry bottoms. No timber.—

June 11th 1880

East on a random line between sections 29 and 32

Va. 16°15' E.

15.50 leave Alkali bottoms and enter valley bearing N E and S.W.

BOOK-A-169

Subdivision T. 22 S. R. 11 W.

Chs.

40.00 Set a stone for temporary 1/4 sec. cor.

79.80 Intersect the N. and S. line 25 links North from corner to sections 28. 29. 32 and 33; from which corner I run. N. 89° 49' W. on a true line, between sections 29 and 32.

39.90 Set a Salt Rock 14 X 8 X 5 in. 10 in. deep, marked 1/4 on the north side, in mound of earth, from 4 pits each 24 X 12 X 12 in. for 1/4 sec. cor.

79.80 The corner to sections 29. 30. 31 and 32.

Level valley land. Soil 1st rate. West end dry alkali bottoms of the Lake. No timber. --

Subdivision T 22 S. R 11 W

Chs. From the established corner to sections 28. 29. 32 and 33.

Sun

North on a true line between sections

28 and 29.

Va. 16° 15' E.

40.00 Set a sand stone 13 X 8 X 7 in. 8 in. deep. marked 1/4 on the west side in mound of earth from 4 pits each 24 X 12 X 12 in. for 1/4 sec. cor. on the east side of the margin of dry bottoms of Sevier Lake which bears NE. and SW.

Level grassy land. Soil 1st rate, bordering on Sevier Lake. – No timber.

Subdivision T. 22 S. 11 W.

Obs. From the established corner to sections 27. 28. 33 and 34 I run,

North on a true line between sections 27 and 28

Va. 16° 15' E.

15.00. dry creek bed in deep gully 100 links wide bears NW heads S.E.

29.00. Wash 25 links wide ~~bears~~ drains NW ~~and~~ ~~S.E.~~

40.00 Set a sand stone 12 X 7 X 6 in. 8 in deep, marked 1/4 on the west side, in mound of earth, from 4 pits each 24 X 12 X 12 in. for 1/4 sec. cor.

66.40 Wash 30 links wide ~~bears~~ drains NW ~~and~~ ~~S.E.~~

80.00 Set a sand stone 12 X 9 X 8 in. 8 in. deep, marked 2 notches on the south and 3 notches on the east edges, in mound of earth

Subdivision T. 22 S. R 11 W

Chs. from 4 Pits each 24 X 12 X 12 in
for corner to sections 21. 22.
27 and 28. near high bench
and Beaver Range mountains
on the East. -

Rolling valley land. Soil 2nd
rate. No timber.

---

true
West on a true line
between sections 21 and 28
Va. 16° 15' E.

23.50 Wash 30 links wide drains ~~[illegible]~~
NW ~~and SE~~

40.00 Set a Salt Rock 15 X 7 X 6 in
10 in. deep, marked 1/4 on the
north side, in mound of earth

BOOK-A-169

Subdivision T. 22 S. R 11 W.

Obs. from 4 pits each 24 X 12 X 12 in. for 1/4 sec. cor. near the eastern margin of dry bottom of Sevier Lake bearing NE. and SW.

Land level — Soil 1st rate

No timber.

From the established corner to sections 21. 22 27 and 28

I run

North on a true line between sections 21 and 22

Va. 16° 15' E.

32.50 A hollow 250 links wide bears NW and SE.

40.00 Set a sand stone 12 X 8 X 6 in. 8 in. deep. marked 1/4 on the west side, in mound of earth

73
75

Subdivision T. 22 S. R. 11 W.

Chs. from 4 pits each 24x12x12 in.
for 1/4 sec. cor.

80.00 Set a sand stone 11x9x6
in. 7 in. deep, marked 3 notches
on the south and east edges,
in mound of earth, from
4 pits each 24x12x12 in.
for corner to sections 15 16.
21 and 22 about 15 chs.
south and east from the
margin of Sevin Lake
bearing N.E. and S.W.

Level valley grassy land
Soil 1st rate.
No timber —

Chains

BOOK-A-169

Subdivision T. 22 S. R. 11 W.

Chs. East on a true line.
Between Sections 15 and 22
Va. 16° 15' E.

40.00 Set a sand stone 13 X 8 X 5 in.
8 in. deep, marked 1/4 on the
north side, in mound of earth
from 4 pits each 24 X 12 X 12 in.
for 1/4 sec. cor.

80.00 Set a sand stone 14 X 7 X 6
in. 9 in. deep, marked 3 notches
on the south and 2 notches on
the east edges, in mound of
earth from 4 pits each 24 X 12
X 12 in. for corner to sections
14. 15. 22 and 23. near the
mountainous land on the
east, covered by rocky bench.
bearing N. E. and S. W.

Valley land Soil 1st rate
No timber —

Subdivision T. 22 S. R. 11 W.

Chs.

North on a true line between sections 14 and 15

Va. 16° 15' E.

35.25 Small wash in a gully ~~[illegible]~~ drains N.W. ~~and S.E.~~ 100 lks wide.

40.00 Set a sand stone 12 X 8 X 6 in. 8 in. deep, marked 1/4 on the west side, in mound of earth, from 4 pits, each 24 X 12 X 12 in. for 1/4 sec. cor.

63.00 Wash 50 links wide ~~[illegible]~~ drains N.W. ~~and S.E.~~

74.50 Wash 50 links wide ~~[illegible]~~ drains N.W. ~~and S.E.~~

80.00 Set a lime stone, 19 X 11 X 10 in. 14 in. deep, marked 4 notches on the south and 2 notches on the east edges, in mound of

BOOK-A-169

Subdivision T. 22 S. R 11 W

Chs. east. from 4 pits each 24 x 12 x 12 in. for corner to sections 10. 11. 14 and 15. about 1/4 mile East from the margin of Sevier Lake.

Level valley gravey land
Soil 1st rate.
No timber —
June 12th 1880.

---

thence
North on a true line, between Sections 10 and 11.
Va. 16° 15' E.

40.00 Set a Salt Rock 13 x 7 x 6 in. 8 in. deep, marked 1/4 on the west side, in mound of

Subdivision T. 22 S. R 11 W

Chs. earth from 4 pits each 24 x 12 x 12 in. for 1/4 sec. cor. on the eastern side of the margin of Senier Lake bearing N.E. and S.W.

Level valley land bordering on Senier Lake. Soil 1st rate No timber.

From the established corner to sections 10. 11. 14 and 15 I run.

East on a true line between sections 11. and 14

Va. 16° 15' E.

22.10. dry bed 20 links wide ~~[illegible]~~

Subdi

Chs.

37.00

40.00

80.00

BOOK-A-169

Subdivision T. 22 S. R. 11 W.

Chs. drains N.W. ~~[illegible]~~

37.00 dry bed 20 links wide ~~[illegible]~~
drains N.W. ~~[illegible]~~

40.00 Set a quartzite rock 12x9x6 in. 8 in. deep, marked 1/4 on the north side, in mound of earth, from 4 pits each 24x12x12 in. for 1/4 sec. cor.

80.00 Set a sand stone 17x13x5 in. 11 in. deep, marked 4 notches on the south and 1 notch on the east, in mound of earth, from 4 pits each 24x12x12 in. for corner to sections 11. 12. 13 and 14.

Valley land, Soil 1st rate
No timber.

Subdivision T. 22 S. R. 11 W

Chs. theure

East on a random line between sections 12 and 13

Va. 16° 15' E

11.20. Wash 25 lks wide ~~[illegible]~~ drains NW ~~[illegible]~~

37.00 Bench land bears NE and SW

40.00 Set a stone for temporary 1/4 sec. cor.

55.00 Foot of Beaver Mountains bearing NE and S.W.

80.64 Intersect the East Boundary or 2nd Guide Meridian West ~~South~~. 28 links South from corner to sections 7. 12 13 and 18, from which corner I run S. 89° 48' W on a true line between sections 12 and 13.

40.32 Set a lime stone 16 X 8 X 5 in. 10 in. deep, marked 1/4 on the north side, in mound of earth

Subdivision T. 22 S. R. 11 W.

Chs from 4 pits. each 24 X 12 X 12 in. for 1/4 sec. cor.

80.64 The corner to sections 11. 12 13 and. 14.

West half valley land. Soil 1st rate. East half, bench and mountainous land on 2500 chs. Soil 3d rate —

North on a true line between sections 11 and 12 Va. 16° 15' E.

8.25 Gully ~~[illegible]~~ drains NW ~~and SE~~

14.00 Gully ~~[illegible]~~ drains W

40.00 Set a sandstone 14 X 8 X 6 in. 10 in. deep, marked 1/4 on the

Subdivision T. 22 S. R. 11 W

Chs. west side, in mound of earth, from 4 pits each 24 X 12 X 12 in for 1/4 sec. cor.

60.50 dry bed 25 links wide, drains ~~bears~~ N.W. ~~and S.E.~~

80.00. Set a quartzite stone 14 X 10 X 8 in. 9 in. deep, marked 5 notches on the south and 1 notch on the east edges, in mound of earth from 4 pits each 24 X 12 X 12 in. for corner to sections 1-2-11 and 12.

Level valley land. Soil 1st rate. No timber.

BOOK-A-169

Subdivision T. 22 S. R. 11 W.

Chs. West on a true line between sections 2 and 11

Va. 16° 15' E

30.50 dry bed 25 links wide, drains N.W. ~~and S.E.~~

40.00 Set a sandstone 13 X 7 X 7 in. 8 in deep, marked 1/4 on the north side, in mound of earth, with 4 pits, each 24 X 12 X 12 in. for 1/4 sec. cor. - near the Eastern Margin of the dry bed of Senier Lake bearing N.E. and S.W.

Level valley land.
Soil 1st rate. No timber -

Subdivision, T. 22 S. R 11 W.

Chs. East on a random line between sections 1 and 12.
Va. 16° 15' E

40.00 Set a stone for temporary 1/4 sec. cor.

50.50 Bench land bears N. and S.

80.22 Intersect the East boundary of the township or 2nd Guide Meridian West North 35 links from corner to sections 1. 12 6 and 7.; from which corner I run;

N. 89° 45' W. on a true line between sections 1. and 12.

40.11 Set a lime stone 15 X 8 X 5 in. 10 in. deep, marked 1/4 on the north side in mound of earth from 4 pits, each 24 X 12 X 12 in. for 1/4 sec. cor.

80.22 The corner to sections 1. 2.

BOOK-A-169

Subdivision T. 22 S. R 11 W.

Ch. 11 and 12

West part valley land. Soil 1st rate. – East part bench, Soil 2nd and 3rd rate: – No timber –

North on a random line between sections 1 and 2 – Va. 16° 15' E.

40.00 Set a stone for temporary 1/4 sec. cor.

79.72 Intersect the North boundary of the township 20 links East from corner to sections 1. 2. 35 and 36.; from which corner I run;

S. 0° 09' E. on a true line between sections 1 and 2.

39.72 Set a grey sand stone 14 X 7 X 5 in. 9 in. deep, marked 1/4 on the west side, in mound of earth, with 4 pits each 24 X 12 X 12 in. for 1/4 sec. cor.

79.72 The corner to sections 1. 2. 11 and 12.

Level valley land. Soil 1st rate. No timber.

June 13th 1880.

BOOK-A-169

80 ~~26~~

Subdivision T. 22 S. R. 11 W.

General description

The land subdivided in this township is along side of the Eastern Margin of Sevier Lake, and consist of a valley embraced between said Lake and Beaver Range of Mountains which can be irrigated by the Sevier River. The soil is of the 1st and 2 qualities, and covered with considerable good grass, and can be adapted for cultivation.

No timber or mineral.

Joseph Gorlewski
deputy surveyor

BOOK-A-169

~~27~~ 7/86

U. S. SURVEYOR GENERAL'S OFFICE,

Salt Lake City, Utah, Aug 14 *1880*

The foregoing field notes of the survey of the

Subdivision lines of Township 22 S. Range 11 W

~~*Township No*~~ ~~*Range No*~~

of the Salt Lake Meridian, Utah Territory,

Executed by Joseph Gorlinski

Under his *contract No* 93

of the 3 *day of* June *1879*

in the month of June *1880,*

having been critically examined, the necessary corrections and explanations made, the said field notes, and the surveys they describe are hereby approved.

Fred. Salomon

U. S. Surveyor General for Utah.

Copied BOOK-A-169 (No 7)
Book 169

R: 1881 87

Filed July 21st 1880

Examined by T. C. Bailey

Compared by T. C. Bailey

FIELD NOTES

OF

THE SURVEY OF THE

North Boundary

of Township No. 25 S., Range No. 11 W.

of the Salt Lake Meridian in Utah Territory.

BY

Joseph Gorlinski

U. S. DEPUTY SURVEYOR,

Under his Contract No. 93.

dated June 3d 1879.

Survey commenced June 14th 1880.

Survey completed June 14th 1880.

BOOK-A-169

North Boundary T. 25 S. R. 11 W.

Chs. Begin at the post the established corner to Tps. 24 and 25 S. between Ranges 10 and 11 W. — The post is standing and agree with the description furnished me by the office, viz:
"Post in mound"

thence
West on a true line, along the North Boundary of section 1.

Va. 16° 30' E. —

4.75 Beaver River 75 links wide with steep banks and 4 feet deep, runs Northerly and heads S.E. in meadow bottoms —

15.00 leave meadow land and enter valley bearing North and South.

40.00 Set a flint stone 16 X 8 X 7 in

North Boundary T.25 S. R.11 W.

Chs. 10 in. deep, marked 1/4 on the north side, in mound of earth, from 4 pits each 24 X 12 X 12 in. for 1/4 sec. cor.

80.00 Set a sand stone 16 X 11 X 6 in. 10 in. deep, marked 1 notch on the east and 5 notches on the west edges, with 4 pits each 24 X 12 X 12 in. for corner to sections 1. 2. 35 and 36 in mound of earth.–

Bottom valley land, with meadow on the east end. Soil 1st rate. No timber.–

BOOK-A-169

North Boundary T. 25 S. R. 11 W.

Chs. West on a true line, along the north boundary of section 2.

Variation 16° 30' E.

40.00 Set a sand stone 14 X 8 X 5 in. 9 in. deep, marked 1/4 on the north side, in mound of earth from 4 pits each 24 X 12 X 12 in. for 1/4 sec. cor.

80.00. Set a sand stone 18 X 8 X 4 in. 12 in. deep, marked 2 notches on the east and 4 notches on the west edges, in mound of earth from 4 pits each 24 X 12 X 12 in for corner to sections 2. 3. 34 and 35.

Level valley land covered with white sage. Soil 1st rate No timber.

North Boundary T. 25 S. R. 11 W.

Chs. West on a true line, along the north boundary of section 3.

Va. 16° 30' E.

40.00 Set a sandstone 18 X 8 X 5 in. 8 in. deep, marked 1/4 on the north side in mound of earth from 4 pits each 24 X 12 X 12 in. for 1/4 sec. cor.

80.00 Set a sandstone 16 X 8 X 6 in. 10 in. deep, marked 3 notches on the east and west edges, in mound of earth, from 4 pits each 24 X 12 X 12 in. for corner to sections 3. 4. 33 and 34.

Level land. Soil 1st rate
No timber

BOOK-A-169

North Boundary T. 25 S. R. 11 W.

Chs. West on a true line, along the north boundary of section 4.

Va. 16° 30' E.

40.00. Set a quartzite rock 13X7X7 in. 8 in. deep, marked 1/4 on the north side, in mound of earth, from 4 pits each 24X12X12 in. for 1/4 sec. cor.

55.00 foot of Beaver Range Mountains bears N.E. and S.W.

80.00 Set a quartzite rock 18X9X6 in. 12 in. deep, marked 4 notches on the east and 2 notches on the west edges, in mound of stone and earth with 4 pits each 24X12X12 in. for corner to sections 4. 5. 32 and 33.

East half gently rolling

North boundary T25S. R11W

Chs. valley land Soil 2nd rate
West part bench and mountainous
land on 25.00 chains. No timber.

For general description reference
is made to the field notes of
the survey of Subdivision lines
in this township.

Joseph Gorlinski.
deputy surveyor.

BOOK

BOOK-A-169

U. S. SURVEYOR GENERAL'S OFFICE,

Salt Lake City, Utah, Aug 14 *1880*

The foregoing field notes of the survey of the

Fractional North boundary of

Township No 25 S. *Range No* 11 W.

of the Salt Lake Meridian, Utah Territory,

Executed by Joseph Gorlinski

Under his *contract No* 93

of the 3 *day of* June *1879*

in the month of June *1880,*

having been critically examined, the necessary corrections and explanations made, the said field notes, and the surveys they describe are hereby approved.

Fred. Salomon

U. S. Surveyor General for Utah.

BOOK-A-169 copied Book 169 (No. 8)

R: 1881 95

Filed July 21st 1880.

Examined by T. C. Bailey

Compared by " " "

FIELD NOTES

OF

THE SURVEY OF THE

Subdivision lines

of Township No. 25 S, Range No. 11 W

of the Salt Lake Meridian in Utah Territory.

BY

Joseph Gorlinski

U. S. DEPUTY SURVEYOR,

Under his Contract No. 93.

dated June 3d 1879.

Survey commenced June 15th 1880.

Survey completed June 19th 1880.

BOOK-A-169

Township 25 S. **R.** 11 W.

			93		91		96		88
9	6		5	113	4	125	3	117	2	106	1
				141		129		116		105
7	7		8	130	9	126	10	115	11	104	12
			135		136		125		114		103
6	18	157	17	151	16	121	15	113	14	102	13
	156		154		155		123		112		101
10	19	152	20	154	21	122	22	111	23	100	24
	151		150		153		121		110		99
5	30	148	29	152	28	120	27	109	26	98	25
	149		146		150		119		108		97
2	31	144	32	129	33	115	34	107	35	96	36

Township

	6					
		117				
15	7					
11	18					
13	19					
12	30					
14	31					

BOOK-A-169

Subdivision T. 25 S. R 11 W.

Chs. From the established corner to sections 35 and 36 on the 5th Standard Parallel South in T. 25 S. R 11 W

I run

North between sections 35 and 36.

Va. 16° 30' E.

40.00 Set a sandstone 12X8X6 in 8 in. deep, marked 1/4 on the west side, in mound of earth, with 4 pits each 24X12X12 in. for 1/4 sec. cor.

54.60 Road bears S.E.

55.40 Road bears E. and W.

57.00 Frisco Road bears N.E. and S.W.

80.00 Set a lime stone 18X12X10 in 12 in. deep, marked 1 with on the south and east edges, in mound of earth, with 4 pits each 24X12X12 in. for cor. to sections 25 26 35 and 36.

Level valley - Soil 1st-rate, white sage undergrowth. No timber

Subdivision T. 25 S. R. 11. W.

Chs. East on a random line, between sections 25 and 36. Va. 16° 30' E.

40.00 Set a stone for temporary 1/4 sec. cor.

80.40 Intersected the East boundary of the township, 35 links North of corner to sections 25. 30. 31 and 36. from which corner I run:

N 89° 45' W on a true line between sections 25 and 36.

40.20 Set a lime stone 12 X 8 X 6 in. 8 in. deep, marked 1/4 on the north side in mound of earth with 4 pits each 24 X 12 X 12 in. for 1/4 sec. cor.

80.40 The corner to sections 25. 26. 35 and 36.

Level valley, with white sage soil 1st rate. - No timber.

BOOK-A-169

Subdivision T. 25 S. R. 11 W.

Chs North between sections 25 and 26.

Va. 16° 30' E.

40.00 Set a sand stone 13 X 8 X 5 in. 8 in. deep, marked 1/4 on the west side, with 4 pits each 24 X 12 X 12 in. for 1/4 sec. cor. in mound of earth.

80.00 Set a lime stone 15 X 10 X 8 in. 10 in. deep, marked 2 notches on the south and 1 notch on the east edges. in mound of earth with 4 pits each 24 X 12 X 12 in. for cor. to sections 23. 24. 25 and 26.

Level 1st rate valley land.
No timber.

Chs. East on a random line between sections 24 and 25.
Va. 16° 30' E. -

40.00 Set a stone for temporary 1/4 sec. cor.

80.66. Intersected the East boundary of the township, 40 lks north of corner to sections 24. 25. 19 and 30 from which corner I run.
N 89° 43' W on a true line between sections 24 and 25

40.33. Set a Red sand stone 12X8X6 in. 8 in deep, in mound of earth from 4 pits each 24X12X12 in marked 1/4 on the north side for 1/4 sec. cor.

80.66. The corner to sections 23. 24. 25 and 26.

Bottom Land. soil 1st rate with white sage and grass
No timber. -

BOOK-A-169

Subdivision T. 25 S. R. 11 W.

Bhs. North, between sections.
23 and 24.
Va. 16° 30' E.

40.00 Set a grey sand stone 13X8X5 in. 8 in. deep, marked 1/4 on the west side, in mound of earth, with 4 pits each 24X12 X12 in. for 1/4 sec. cor. —

80.00 Set a grey sand stone 14X7X6 in. 9 in. deep, marked 3 notches on the south and 1 notch on the east edges, with 4 pits each 24X12X12 in. for cor. to sections 13. 14. 23 and 24.

Level valley land —
Soil 1st rate.
No timber. —

Subdivision T 25 S. R 11 W.

Chs. East on a random line between sections 13 and 24.

Va. 16° 30' E

40.00 Set a stone for temporary 1/4 sec. cor.

80.56 Intersected the East boundary of the township. 46 links N. of corner to sections 13. 24. 18 and 19; from which corner I run.

N 89° 40' W on a true line, between sections 13 and 24.

40.28 Set a flint stone 14 X 8 X 5 in. 9 in. deep, marked 1/4 on the north side, in mound of earth with 4 pits each 24 X 12 X 12 in. for 1/4 sec. cor.

80.56 The corner to sections 13. 14. 23 and 24.—

Level land. Soil 1st rate white sage and greasewood undergrowth.— No timber.

Subdivision T. 25 S. R. 11 W.

Chs. North between sections 13 and 14.

Va. 16° 30' E.

40.00. Set a flint stone 14 X 7 X 6 in. 10 in deep marked 1/4 on the west side, in mound of earth, from 4 pits each 24 X 12 X 12 in. for 1/4 sec. cor.

80.00 Set a sand stone 12 X 8 X 6 in. 8 in. deep, marked 4 notches on the south and 1 notch on the east edges in mound of earth, from 4 pits each 24 X 12 X 12 in. for corner to sections 11. 12. 13 and 14.

Beaver River bottom land.
Soil 1st rate.-
No timber.

Subdivision T. 25 S. R. 11 W.

Chs. East on a random line between sections 12 and 13 Va. 16° 30' E.

40.00 Set a stone for temporary 1/4 sec. cor.

65.00 Meadow land bears N & S.

74.60 Beaver river branch 50 links wide runs North heads South.

80.80 Intersect the East boundary of the township 50 links North from corner to sections 12. 13. 7 and 18. From which corner I run: N 89° 39' W on a true line between sections 12 and 13.

40.40 Set a grey sand stone 13 X 8 X 5 in. 8 in. deep, marked 1/4 on the north side, in mound of earth, with 4 pits, each 24 X 12 X 12 in. for 1/4 sec. cor.

80.80 The corner to sections 11. 12. 13 and 14. Bottom valley land. Soil 1st rate. No timber.

BOOK-A-169

T. 25 S. R. 11. W.

Chs. North between sections
11 and 12.
Va. 16° 30' E.

40.00 Set a limestone 12X9X7 in.
8 in. deep, marked 1/4 on the west
side, in mound of earth, with 4
pits each 24X12X12 in. for 1/4
sec. cor.

80.00 Set a lime stone 15X12X6 in.
10 in. deep, marked 5 notches on the
south and 1 notch on the east
edges, with 4 pits each 24X12
X12 in. for corner to sections
1. 2. 11 and 12.

Beaver River bottom land
Soil 1st rate. No timber.

Subdivision T. 25 S. R 11 W.

Chs. East on a random line between sections 1 and 12.

Va. 16° 30' E.

40.00 Set a stone for temporary 1/4 sec. cor.

58.00 Meadow land bears N & S.

77.20 Branch of Beaver River heads S. runs N.

80.72 Intersect the East boundary of the township 70 links North of corner to sections 1. 12. 6 and 7. From which corner I run: N 89° 30' W on a true line between sections 1 and 12

40.36 Set a grey sand stone 13X7X5 in. 8 in deep, marked 1/4 on the west side, in mound of earth; from 4 pits each 24X12X12 in for 1/4 sec. cor.

80.72 The corner to sections 1. 2. 11 and 12.

Bottom land. Soil 1st rate, No timber.—

Subdivision T. 25 S. R. 11 W.

Chs. North on a true line, between sections 1 and 2.

Va. 16° 30' E.

40.00 Set a temporary stone for 1/4 sec. cor.

78.92 Intersected the North boundary of the township, 70 links West from corner to sections 1. 2. 35 and 36; from which corner Drum. S. 0° 30' W on a true line, between sections 1 and 2.

38.92 Set a lime stone 13 X 10 X 6 in. 8 in. deep, marked 1/4 on the west side in mound of earth, with 4 pits each 24 X 12 X 12 in. for 1/4 sec. cor.

78.92 The corner to sections 1. 2. 11 and 12.

Bottom level land. Soil 1st rate. No timber. —

June 15th 1880.

Subdivision T. 25 S. R 11 W.

Chs. From the established corner to sections 34 and 35 on south boundary of the township in the 5th Standard Parallel South

Run.

North between sections 34 and 35

Va. 16° 30' E.

39.90 Frisco road bears NE. and SW.

40.00 Set a sand stone 12X9X5 in. 8 in. deep, marked 1/4 on the west side, in mound of earth, from 4 pits each 24X12X12 in. for 1/4 sec. cor.

8.000 Set a limestone 15X10X8 in. 10 in. deep, in mound of earth, with 4 pits each 24X12X12 in. marked 2 notches on the east and 1 notch on the south edges, for corner to sections 26. 27. 34 and 35

Level valley, covered with white sage, rabbit brush and grass. — Soil 1st rate. No timber. —

Subd

Chs.

40.00

79.80

39.90

79.80

BOOK-A-169

Subdivision T. 25 S. R 11 W

Chs. East on a random line, between sections 26 and 35 Va. 16° 30' E.

40.00 Set a stone for temporary 1/4 sec. cor.

79.80 Intersected the N. and S. line 20 links north from corner to sections 25. 26 35 and 36; from which corner I run.

N. 89° 51 W. on a true line, between sections 26 and 35

39.90 Set a sand stone 13 X 2 X 5 in. 8 in. deep, marked 1/4 on the north side, in mound of earth, from 4 pits each 24 X 12 X 12 in. for 1/4 sec. cor.

79.80 The corner to sections 26. 27. 34. and 35.

Level land. Soil 1st rate

No timber. –

Bhs. North, between sections
26 and 27.
Va. 16° 30' E.

40.00 Set a sand stone 12X8X5 in. 8 in. deep, marked 1/4 on the west side, in mound of earth, with 4 pits each 24X12X12 in for 1/4 sec. cor.

80.00 Set a flint stone 14X10X6 in. 9 in deep. marked 2 notches on the south and east edges, in mound of earth, with 4 pits, each 24X12X12 in. for corner to sections 22. 23. 26 and 27.

Level valley land. Soil 1st rate overgrown by rabbitt brush, white sage and grass. No timber—

40.00

79.84

39.92

79.84

BOOK-A-169

Subdivision T. 25 S. R 11 W

East on a random line,
between sections 23 and 26.
Va. 16° 30' E.

40.00 Set a stone for temporary 1/4 sec. cor.

79.84 Intersect the N. and S. line
16 links N. from corner to sections
23, 24, 25, and 26; from which
corner I run;
N 89° 53' W on a true line
between sections 23 and 26.

39.92 Set a white sand stone 11X8X7
in. 7 in. deep, marked 1/4 on the
north side, with 4 pits each 24
X12X12 in. in mound of earth
with 4 pits each 24X12X12 in.
for 1/4 sec. cor.

79.84 The corner to sections 22, 23,
26 and 27.

Level first rate land.—
No timber.—

Subdivision T. 25 S. R. 11 W.

Chs. North between sections
22 and 23
Va. 16° 30' E.

40.00 Set a limestone 13X8X5 in.
8 in. deep, marked 1/4 on the
west side, in mound of earth
with 4 pits each 24X12X12 in.
for 1/4 sec. cor.

53.00 a dry creek bed 30 links wide ~~bears~~ drains NE ~~[illegible]~~

80.00 Set a grey sand stone 12X8X8
in. 8 in. deep, marked 3 notches
on the south and 2 notches on
the east edges, with 4 pits each
24X12X12 in. in mound of
earth, for corner to sections
14. 15. 22 and 23.

Level valley land, overgrown
by white sage, rabbit brush
and grass. Soil 1st rate,
No timber.—

Subdivision T. 25 S. R 11 W.

Chs. East on a random line, between sections 14 and 23.
Va. 16° 30' E.

13.75 dry creek bed 20 lks wide, drains NE.
29.00 dry creek bed 10 lks wide, drains NE.
40.00 Set a stone for temporary 1/4 sec. cor.
79.70 Intersect the N. and S. line. 10 links South from corner to sections 13. 14. 23 and 24. From which corner I run;
S. 89° 56' W. on a true line between sections 14 and 23.
39.85 Set a red sand stone 14X7X6 in. 9 in. deep, marked 1/4 on the north side with 4 pits each 24X12X12 in. in mound of earth for 1/4 sec. cor.
79.70 The corner to sections 14. 15. 22 and 23.

Level valley. Soil 1st rate. no timber.

#113

Subdivision T. 25 S. R. 11 W.

Chs. North between sections
14 and 15.
Va. 16° 30' E.

40.00 Set a sand stone 14X8X5 in. 10 in. deep, marked 1/4 on the west side, in mound of earth, with 4 pits each 24X12X12 in for 1/4 sec. cor.

80.00 Set a sand stone 14X7X6 in. 10 in. deep, marked 4 notches on the south and 2 notches on the east edges, with 4 pits each 24X12X12 in. in mound of earth - for corner to sections 10. 11. 14 and 15. -

Level valley land. Soil 1st rate. No timber -

BOO

Subdi

Chs.

40.00

80.10

40.05

80.10

BOOK-A-169

Subdivision T. 25 S. R 11 W.

Chs. East on a random line, between sections 11 and 14.
Va. 16° 30' E.

40.00 Set a stone for temporary 1/4 sec. cor.

80.10 Intersect the N. and S. line 35 links south from corner to sections 11. 12. 13 and 14; from which corner I run;
S. 89° 45' W. on a true line, between sections 11 and 14.

40.05. Set a grey sand stone 11X8X6 in. 7 in. deep, marked 1/4 on the north side, with 4 pits each 24X 12X12 in for 1/4 sec. cor

80.10 The corner to sections 10. 11. 14 and 15.

Level valley - Soil 1st rate; No timber. -

Subdivision T. 25 S. R. 11 W.

Chs. North between sections
10 and 11.
Va. 16° 30' E.

40.00 Set a sand stone 14X10X4 in. 9 in. deep, marked 1/4 on the west side, in mound of earth, with 4 pits each 24X12X12 in. for 1/4 sec. cor.

80.00 Set a sand stone 14X11X4 in 9 in. deep, marked 5 notches on the south and 2 notches on the east edges, in mound of earth, with 4 pits each 24X12X12 in. for corner to sections 2. 3. 10 and 11.

Level land. Soil 1st rate. White sage undergrowth with grass. — No timber. —

Sur

Chs.

40.00

79.70

39.85

79.70

Subdivision T. 25 S. R. 11 W.

Chs. East on a random line between sections 2 and 11.
Va. 16° 30' E.

40.00 Set a stone for temporary 1/4 sec. cor.

79.70 Intersect the N. and S. line 30 links N. from corner to sections 1. 2. 11 and 12; from which corner I run;
N. 89° 47' W. on a true line, Between sections 2 and 11

39.85 Set a sand stone, 11X9X6 in. 7 in. deep, marked 1/4 on the north side with 4 pits each 24X12X12 in. in mound of earth, for 1/4 sec. cor.

79.70 The corner to sections 2. 3. 10. and 11.

First rate bottom land covered with white sage — No timber. —

Chs. North on a random line, between sections 2 and 3.

Va. 16° 30' E.

40.00 Set a stone for temporary 1/4 sec. cor.

79.08. Intersect the North Boundary of the township 50 links West from corner to sections 2. 3. 34 and 35; from which corner I run;

S. 0° 20' W. on a true line, between sections 2 and 3.

39.08. Set a sand stone 16X8X6 in. 10 in. deep, marked 1/4 on the north side with 4 pits, each 24X12X12 in. for 1/4 sec. cor. in mound of earth.

79.08 The corner to sections 1. 2. 11 and 12.

Land level. Soil 1st rate.—
No timber.—

June 16th 1880

Subdivision T. 25 S. R. 11 W.

Chs. From the established corner to sections 33 and 34. on the south boundary of the township in the 5th Standard Parallel South

I run.

North, between sections 33 and 34.

Va. 16° 30' E.

22.00 Road to Frisco from Beaver bears SW and N.E.

40.00 Set a sand stone 16 X 8 X 4 in. 10 in. deep. marked 1/4 on the west side. in mound of earth, with 4 pits each 24 X 12 X 12 in for 1/4 sec. cor.

80.00 Set a grey sand stone 14 X 10 X 7 in. 9 in. deep, marked 1 notch on the south and 3 notches on the east edges. in mound of earth with 4 pits each 24 X 12 X 12 in. for corner to secs. 27. 28. 33 and 34

Level land. Soil 1st rate

No timber. –

Chs. East on a random line,
between sections 27 and 34.
Va. 16° 30' E.

40.00 Set a stone for temporary 1/4 sec. cor.

79.58 Intersect the N. and S. line, 20 links N. from corner to sections 26. 27. 34 and 35; from which corner I run,

N. 89° 51' W on a true line,
Between sections 27 and 34.

39.79 Set a sand stone 13X7X6 in. 8 in. deep, marked 1/4 on the north side, with 4 pits each 24X12X12 in. in mound of earth, for 1/4 sec. cor.

79.58 The corner to sections 27. 28. 33 and 34.

Level land, covered with white sage and grass. Soil 1st rate
No timber. —

Chs.
8.50
40.00
6000
76.25
80.00

Subdivision T. 25 S. R. 11 W.

Chs. North between sections 27 and 28.

Va. 16° 30' E.

8.50 dry creek bed 100 links wide, ~~bears~~ drains SW & NE.

40.00 Set a grey sand stone 12 X 10 X 7 in. 8 in. deep, marked 1/4 on the west side, in mound of earth, with 4 pits each 24 X 12 X 12 in. for 1/4 sec. cor.

60.00 dry bed 15 links wide ~~bears~~ drains NE. ~~and SW~~.

76.25 dry bed 20 links wide ~~bears~~ drains NE ~~and SW~~.

80.00 Set a sand stone 20 X 12 X 5 in. 15 in deep, marked 2 notches on the south and 3 notches on the east in mound of earth with 4 pits each 24 X 12 X 12 in. for corner to sections 21. 22. 27 and 28.

Land gently rolling. Soil 1st rate. No timber –

Chs.	East on a random line, between sections 22 and 27. Va. 16° 30' E.	Chs. 5.00
27.25	dry creek bed 25 links wide bears N.E. and S.W.	27.40
40.00	Set a stone for temporary 1/4 sec. cor.	37.00
80.16	Intersect the North and South line 40 links North from corner to sections 22. 23. 26 and 27; from which corner I run; N. 89° 43' W on a true line, between sections 22 and 27.	40.00
40.08	Set a sand stone 13x7x6 in. 8 in. deep. marked 1/4 on the north side, with 4 pits each 24x12x12 in. in mound of earth for 1/4 sec. cor.	48.50
80.16	The corner to sections 21. 22. 27 and 28.	80.00

Land level. Soil 1st rate with grass and white sage growth. No timber.

Subdivision T. 25 S. R. 11 W.

Obs. North between sections 21 and 22
Va. 16° 30' E.

5.00 small wash 10 links wide ~~bears~~ drains NE ~~nearly~~

27.40 " " " " " " " "

37.00 " " " " " " " "

40.00 Set a sand stone 16X8X5 in. 10 in. deep, marked 1/4 on the west side, in mound of earth, with 4 pits each 24X12X12 in. for 1/4 sec. cor.

48.50 dry bed 20 links wide bears NE and SW.

80.00 Set a flint stone 16X8X8 in 10 in. deep, marked 3 notches on the south and east edges, in mound of stone and earth, marked with 4 pits each 24X12X12 in. for corner to sections 15. 16. 21 and 22.

Land level cut up with dry creek beds. Soil 1st rate
No timber. –

Chs. East on a random line.
Between sections 15 and 22
Va. 16° 30' E.
40.00 Set a stone for temporary 1/4 sec cor.
59.75. dry bed 20 links wide ~~bears~~ ~~N. W. an~~ drains S E.
80.00 Intersect the N. and S. line. 28 links South. from corner to sections 14. 15. 22 and 23; from which corner I run:
S 89° 48' W on a true line,
between sections 15 and 22.
40.00 Set a sand stone 14 X 7 X 7 in. 9 in deep, marked 1/4 on the north side in mound of earth, from 4 pits each 24 X 12 X 12 in. for 1/4 sec. cor.
80.00 The corner to sections 15. 16. 21. and 22.
Land level. Soil 1st rate
No timber.—

BOOK-A-169

Subdivision T. 25 S. R 11 W.

Chs. North, between sections 15 and 16.

Va. 16° 30' E.

34.50 Dry bed 30 links wide, ~~[illegible]~~ drains S.E.

40.00 set a sand stone 12 X 8 X 5 in. 8 in. deep, marked 1/4 on the west side, in mound of earth, with 4 pits each 24 X 12 X 12 in. for 1/4 sec. cor.

80.00 Set a sand stone 12 X 10 X 5 in. 8 in. deep, marked 4 notches on the south and 3 notches on the east edges, in mound of earth, from 4 pits each 24 X 12 X 12 in for corner to sections 9. 10. 15 and 16. —

Land level covered with white sage, grass and shadscale brush Soil 1st rate. No timber. —

Subdivision T. 25 S. R. 11 W.

Chs. East on a random line,
between sections 10 and 15.
Va. 16° 30' E.

40.00 Set a stone for temporary 1/4 sec. cor.

80.42 Intersected the N. and S. line.
35 links North from corner to
sections 10. 11. 14 and 15; from
which corner I run;
N. 89° 45' W. on a true line
between sections 10 and 15.

40.21. Set a flat stone 16 X 9 X 6 in.
10 in. deep, marked 1/4 on the north
side with 4 pits each 24 X 12 X 12
in. for 1/4 sec. cor. in mound of earth.

80.42 The corner to sections 9. 10. 15
and 16.

Land level, Soil 1st rate.
No timber.

Subdivision T. 25 S. R. 11 W.
Chs.
40.00
80.00

BOOK-A-169

Bks. North between sections
9 and 10.
Va. 16° 30' E.

40.00 Set a sand stone 16X8X5 in. 10 in. deep, marked 1/4 on the west side, in mound of earth with 4 pits each 24X12X12 in. for 1/4 sec. cor.

80.00 Set a sand stone 14X10X6 in. 9 in. deep, marked 5 notches on the south and 3 notches on the east edges, in mound of earth, with 4 pits each 24X12X12 in. for corner to sections 3. 4. 9 and 10.

Land level. Soil 1st rate
No timber.-

Subdivision T. 25 S. R 11 W.

Chs. East on a random line
Between sections 3 and 10.
Va. 16° 30' E.

40.00 Set a stone, for temporary 1/4 sec. cor.

79.70. Intersected the N. and S. line
37 links south from corner to
sections 2-3.10 and 11;
From which corner I run
S. 89° 44' W on a true line,
between sections 3 and 10

39.85 Set a lime stone 12 X 8 X 6 in.-
8 in. deep. marked 1/4 on the
north side, in mound of earth
from 4 pits each 24 X 12 X 12
in. for 1/4 sec. cor.

79.70 The corner to sections 2.3.10
and 11.

Land level. Soil 1st rate
with white sage, grass and
shadscale brush. No timber

Subdivision T. 25 S. R 11 W.

Chs. North on a random line,
Between sections 3 and 4.
N. 16° 30' E

40.00 Set a stone for temporary 1/4 sec. cor.

79.80 Intersect the North boundary of the township 44 links west from corner to sections 3. 4 33 and 34; from which corner S. run. S. 0° 19' W. on a true line between Sections 3 and 4.

39.80 Set a sand stone 15 X 10 X 4 in. 10 in. deep, marked 1/4 on the west side, with 4 pits, each 24 X 12 X 12 in. in mound of earth, for 1/4 sec. cor.

79.80 The corner to sections 3. 4. 9 and 10.

Gently rolling land. Soil 2nd rate
No timber.

June 17th 1880.

Subdivision
T. 25 S. R 11 W

Chs. From the established corner to sections 32 and 33 on the South boundary of the township in the 5th Standard Parallel South, S run;

North between sections 32 and 33.
Va. 16° 30' E.

5.95 Road bears N.E. and S.W.

38.75 Dry Creek 100 links wide, heads S.W. bears N.E.

40.00 Set a Flint stone 14 X 10 X 5 in. 9 in. deep, marked 1/4 on the west side, in mound of earth, from 4 pits each 24 X 12 X 12 in. for 1/4 sec. corner.

74.45 Small Wash ~~bears~~ drains N.E. ~~and S.W.~~

80.00 Set a Flint stone 13 X 8 X 5 in. 8 in. deep, marked 1 notch on the south and 4 notches on the east edges, in mound of earth,

BOOK-A-169

Subdivision T. 25 S. R. 11 W.

Chs. from 4 pits each 24 X 12 X 12 in for corner to sections 28. 29. 32 and 33. –

Land gently rolling. with grass, white sage and rabbit brush Soil 1st rate. No timber.

East on a random line between sections 28 and 33.
Va. 16° 30' E.

40.00 Set a stone for temporary 1/4 sec. cor.

62.50. Dry creek 100 links wide heads S.W. bears N.E.

79.66. Intersect the N. and S. line 17 links North from corner

Subdivision T. 25 S. R. 11 W.

Chs. to sections 27. 28. 33 and 34.
from which corner I run
N. 89° 53' W. on a true
line, between sections
28 and 33.

39.83 Set a limestone 15 X 6 X 6
10 in. deep, marked 1/4 on the
north side, in mound of
earth, with 4 pits each
24 X 12 X 12 in. for 1/4 sec. cor

79.66. The corner to sections
28. 29. 32 and 33.

Land level - Soil 1st rate
overgrown with grass, white
sage and shadscale brush
No timber -

Subdivision T. 25 S. R. 11 W

Chs. North, between sections
28 and 29.
Va. 16° 30' E.

39.75 dry bed 25 links wide, ~~[illegible]~~ drains N.E.
~~and [illegible]~~

40.00 Set a Flint stone 14 X 7 X 5 in. 9 in deep, marked 1/4 on the west side, in mound of earth from 4 pits, each 24 X 12 X 12 in. for 1/4 sec. cor.

80.00 Set a Flint stone 16 X 9 X 8 in 10 in deep, marked 2 notches on the south and 4 notches on the east edges, in mound of earth, from 4 pits each 24 X 12 X 12 in. for corner to sections 20. 21. 28 and 29.

Land gently rolling and level with sage, grass and rabbit brush. Soil 1st rate. No timber.—

Subdivision T. 25 S. R. 1 W.

Chs. East on a random line between sections 21 and 28 Va. 16° 30' E.

40.00 Set a stone for temporary 1/4 sec. cor.

47.20 dry bed 20 links wide, ~~bears~~ drains NE ~~and SW~~.

59.10 dry bed 15 links wide, ~~bears~~ drains NE ~~and SW~~.

80.58 Intersect the N. and S. line 14 links South from corner to sections 21. 22 27 and 28 from which corner I run, S. 89° 54' W. on a true line between sections 21 and 28.

40.29 Set a sand stone 15 x 8 x 6 in. 10 in. deep, marked 1/4 on the north side in mound of earth, from 4 pits each 24 x 12 x 12 in. for 1/4 sec. cor.

BOOK-A-169

Subdivision T. 25 S. R. 11 W.

Obs:

80.58 The corner to sections 20. 21. 28 and 29.

Level valley land, overgrown by white sage, grass and rabbit brush. Soil 1st rate No timber.

North between sections 20 and 21.

Va. 16° 30' E.

40.00 Set a porphyrite rock 13 X 8 X 6 in. 8 in. deep, marked 1/4 on the west side in mound of earth, from 4 pits each 24 X 12 X 12 in. for 1/4 sec.

Subdivision T. 25 S. R. 11 W.

Chs. cor.

80.00 Set a flint stone 14 X 8 X 6 in. 9 in. deep, marked 3 notches on the south, and 4 notches on the east edges, in mound of earth, from 4 pits each 24 X 12 X 12 in. for corner to sections 16. 17. 20 and 21.

Land level, Soil 1st rate white sage, shadscale and rabbit undergrowth.—
No timber.

East on a random line between sections 16 and 21.
Va. 16° 30' E.

40 Set a stone, for temporary

BOOK-A-169

Subdivision T. 25 S. R. 11 W.

Bhs 1/4 sec. cor.

80.30. Intersect the N. and S. line 35 links North from corner to sections 15. 16. 21 and 22 from which corner I run N. 89° 45' W. on a true line, between sections 16 and 21.

40.15 Set a flint stone 13 X 10 X 8 in., 8 in. deep, marked 1/4 on the north side, in mound of earth, from 4 pits each 24 X 12 X 12 in. for 1/4 sec. cor.

80.30. The corner to sections 16 17. 20 and 21.

Land level. Soil 1st rate
No timber.

Bks. North between sections
16 and 17.
Va. 16° 30' E.

40.00 Set a cobble stone 16 X 7 X 5 in.
10 in. deep; marked 1/4 on the
west side in mound of earth,
from 4 pits each 24 X 12 X 12
in. for 1/4 sec. cor.

46.40 dry bed 20 links wide, ~~[illegible]~~ drain
E. ~~[illegible]~~

80.00 Set a flint stone 13 X 8 X 5 in.
8 in. deep, marked 4 notches
on the south and east edges
in mound of earth, from 4
pits each 24 X 12 X 12 in.
for corner to sections 8. 9.
16 and 17.

Gently rolling grassy land.
Soil 2nd rate. No timber.

Subdivision T 25 S R 11 W

Chs. West on a true line between sections 8 and 17.
Va. 16° 30' E.

29.00 foot of Beaver Mountains bear NE. and SW

40.00 Set a quartzite rock 18 X 10 X 6 in. 12 in deep marked 1/4 on the north side, in mound of stone and earth from 4 pits, each 24 X 12 X 12 in for 1/4 sec. cor. on the east side of Beaver Range Mountains — bearing NE and SW

East part rolling grassy land Soil 2nd rate — West end mountainous on 11.00 chs Soil 3d rate. —

(copy this mile after ... next)

Chs. North between sections 8 and 9.

Va: 16° 30' E.

40.00 Set a sand stone 13X8X6 in. 8 in. deep, marked 1/4 on the west side, in mound of earth from 4 pits each 24X12X12 in. for 1/4 sec. cor.

61.50 Wash 30 links wide, ~~bears~~ drains E. ~~[illegible]~~ and enter bench rolling land

80.00 Set a flint stone 16X8X5 in. 10 in. deep, marked 5 notches on the south and 4 notches on the east edges, in mound of stone and earth, with 4 pits each 24X12X12 in. for corr. to sections 4. 5. 8 and 9.

Gently rolling land. Soil 1st and 2nd rate. North end bench land. Soil 3d rate. - Beaver Ramp about 1/4 mile West. No timber -

Subdivision T. 25 S. R. 11 W.

Chs: East on a random line between sections 9 and 16.
Va. 16° 30' E.

40.00 Set a stone for temporary 1/4 sec. cor.

64.90 dry bed 25 lks wide, drains ~~[illegible]~~ ~~[illegible]~~ S E.

79.74 Intersected the N. and S. line. 42 links West from corner to sections 9. 10. 15 and 16; from which corner I run
N 89° 42' W on a true line between sections 9 and 16.

39.87. Set a flint stone 13 X 8 X 5 in. 8 in. deep, marked 1/4 on the west side, in mound of earth, from 4 pits each 24 X 12 X 12 in. for 1/4 sec. cor.

79.74. The corner to sections

Subdivision T. 25 S. R. 11 W.

Chs. 8. 9. 16 and 17.—

Gently rolling land, covered with white sage and bunch grass. Soil 1st rate—
No timber—

East on a random line between sections 4 and 9.
Va: 16° 30' E.

22.50 Wash 30 links wide ~~[illegible]~~ ~~[illegible]~~ ~~and~~ drains S. E.; leave bench and enter valley land

40.00 Set a stone for temporary 1/4 sec. cor.

80.52 Intersect the N. and S. line 21 links North from corner

BOOK-A-169

Subdivision T. 25 S. R 11 W.

Chs to sections 3. 4. 9. and 10. from which corner I run. N. 89° 51' W. on a true line, between sections 4 and 9.

40.26. Set a porphyry stone 16x8x6 in. 10 in. deep, marked 1/4 on the north side, in mound of earth, from 4 pits each 24 x 12 x 12 in. for 1/4 sec. cor.

80.52 The corner to sections 4. 5. 8 and 9.

Level valley land, covered with white sage and grass. Soil 1st rate - West end bench land. Soil 2nd rate.

Subdivision T. 25 S. R 11 W

Chs. North on a random line between sections 4 and 5

Va. 16° 30' E.

27.50 A dry creek bed ~~[illegible]~~ drains S.E. ~~[illegible]~~

40.00 Set a stone for temporary 1/4 sec. cor.

58.00 foot of Beaver Range Mountains bear N.E. and S.W.

79.64 Intersect the North boundary of the township 40 links west from corner to sections 4 5. 32 and 33; from which corner I run;

South 0° 17' W on a true line, between sections 4 and 5.

39.64 Set a flint stone 17X9X6 in 11 in deep marked 1/4 on the west side; in mound of earth from 4 pits, each 24X12X12

Subdivision T. 25 S. R 11 W.

Chs. iv. for 1/4 sec. cor.

79.64. The corner to sections 4 5. 8 and 9.

Bench grassy rolling land Soil 2nd rate. North end mountainous and rocky on 21.64 chs. Soil 3d rate.

No timber.

June 18th 1880.

From the established corner to Sections 31 and 32 on the south boundary of the township in the 5th Standard Parallel South I run.

North between sections 31 and 32

Subdivision T. 25 S. R. 11 W.

Chs. Va. 16° 30' E.

1.70 Dry creek bed 100 links wide heads S.W. bears N.E.

40.00 Set a flint stone 16X8X6 in 10 in. deep, marked 1/4 on the west side, in mound of earth from 4 pits, each 24X12X12 in. for 1/4 sec. cor.

48.00 dry bed 15 links wide, ~~bears~~ drains N. ~~and S.W.~~

65.25 Wash 15 links wide, ~~bears~~ drains N. ~~and S.W.~~

80.00 Set a flint stone 15X12X10 in 10 in. deep, marked 1 notch on the south and 5 notches on the east edges, in mound of earth, with 4 pits each 24X12X12 in. for corner to sections 29. 30. 31 and 32.

Rolling grassy land. Soil 2nd rate. No timber.—

Subdivision T. 25 S. R 11 W.

Chs. East on a random line, between sections 29 and 32 Va. 16° 30' E.

17.25 dry bed 15 links wide ~~bears~~ drains N.E. and S.W.

40.00 Set a stone for temporary 1/4 sec. cor.

79.78 Intersect the N. and S. line. 16 links North from corner to sections 28. 29. 32 and 33. from which corner I run:

N 89° 53' W on a true line between sections 29 and 32.

39.89 Set a sand stone 11X8X6 in. 7 in. deep, marked 1/4 on the north side, in mound of earth, pit 4 pits each 24X12X12 in. for 1/4 sec. cor.

79.78. The corner to sections 29. 30. 31 and 32.

Level valley land. Soil 1st rate. White sage and grease wood undergrowth with grass. No timber.

West on a random line between sections 30 and 31
Va. 16° 30' E.

21.50 Wash drains ~~[illegible]~~ N.E. ~~and S.W.~~

40.00 set a stone for temporary 1/4 sec. cor.

66.25 Wash 15 links wide drains ~~[illegible]~~ N.E. ~~and S.W.~~

80.12 Intersect the 2nd Guide Meridian West on West boundary of the township 21 links south from corner

BOOK-A-169

Subdivision of T. 25 S. R 11 W

Ch to sections 25. 30. 31 and 36.
from which corner I run
S. 89° 51' E. on a true line
between sections 30 and 31.
40.12 Set a cobble stone 13 X 10 X 6.
in. 8 in. deep. marked 1/4 on the
north side, in mound of
earth, from 4 pits each 24 X
12 X 12 in. for 1/4 sec. cor.
80.12 The corner to sections
29. 30. 31 and 32.

Gently rolling land —
Soil 2nd rate
No timber —

Subdivision T. 25. S. R 11 W

Chs. North between sections 29. and 30

Va. 16° 30 E.

18.00 rock drains N E.

40.00 Set a Volcanic rock 12X8X6 in 8 in. deep. marked 1/4 on the west side in mound of earth. from 4 pits each 24X12X12 in. for 1/4 sec. cor.

80.00 Set a sand stone 14X8X5 in 9 in. deep. marked 2 notches on the south and 5 notches on the east edges. in mound of earth. from 4 pits each 24X12X12 in. for corner to sections 19. 20. 29 and 30.

Valley land. Soil 1st rate

No timber.

Subdivision T. 25 S. R 11 W.

Cho. East on a random line between sections 20 and 29.
Va. 16° 30' E.

33.25 Wash 15 lks wide ~~[illegible]~~ drains NE ~~[illegible]~~

40.00 Set a stone for temporary 1/4 sec. cor.

0.40 Intersect the N. and S. line 28 links North from corner to sections 20. 21 28 and 29. from which corner S run:
S 89° 48' W on a true line between sections 20 and 29

0.20 Set a sand stone 14 X 8 X 6 in. 9 in. deep, marked 1/4 on the north side. in mound of stone and earth. from 4 pits each 24 X 12 X 12 in. for 1/4 sec. cor.

0.40 The corner to sections 19. 20. 29 and 30. –

Valley land. Soil 1st rate
No timber. –

Subdivision T. 25 S. R. 11 W.

Chs	
	West on a random line between sections 19 and 30
	Va. 16° 30' E
15.00	dry creek 20 lks wide drains ~~[illegible]~~ N E ~~[illegible]~~
40.00	Set a stone for temporary 1/4 sec. cor.
79.80	Intersect the 2nd Guide Meridian South or West boundary of the township 30 links North from corner to sections 19. 30 24 and 25; from which corner I run,
	N. 89° 47' E on a true line between sections 19 and 30
39.80	Set a volcanic rock 12 X 8 X 6 in. 8 in. deep, marked 1/4 on the north side, in mound of earth. from 4 pits each 24 X 12 X 12 inches. for 1/4

Subdivision T. 25 S. R 11 W.

Chs. sec. cor.

79.80. The corner to sections 19. 20. 29. and 30.

Gently rolling land. Soil 2nd rate.

No timber. -

North, between sections 19 and 20

Va. 16° 30' E.

26.25. Wash 50 links wide ~~[illegible]~~ drains NE. ~~and SW.~~

40.00 Set a sand stone 13X8X5 in. 8 in. deep. marked 1/4 on the west side, in mound of earth, from 4 pits, each

Subdivision T. 25 S. R 11 W

Chs. 24 X 12 X 12 in. for 1/4 sec. cor.

56.00 dry bed 15 links wide ~~bears~~ drains E ~~W~~

80.00 Set a flint stone 14 X 8 X 5 in 9 in. deep, in mound of earth marked 3 notches on the south and 5 notches on the west edges, with 4 pits each 24 X 12 X 12 in. for corner to sections 17. 18. 19. and 20.

Gently rolling grassy land
Soil 2nd rate.
No timber

Subdivision T. 25 S. R. 1 W.

Chs. East on a random line,
between sections 17 and 20.
Va. 16° 30' E.

40.00 Set a stone for temporary 1/4
sec. cor.

48.75 A Wash 20 links wide drains N E
~~and S W~~

80.38 Intersect the N. and S. line.
10 links South. from corner to
sections 16. 17. 20 and 21;
from which corner I run
S. 89° 56' W on a true
line, between sections
17 and 20.

40.19 Set a lime stone 14 X 8 X 5 in.
9 in. deep, marked 1/4 on the
north side, in mound of earth,
with 4 pits each 24 X 12 X 12
in. for 1/4 sec. cor.

80.38 The corner to sections

Subdivision T. 25 S. R 112

Obs. 17. 18. 19 and 20.

Level valley land. Soil first rate no timber.

West on a random line between sections 18 and 19.
Va. 16° 30' E.

26.00 foot of Beaver ridge mountain bear N.E. and S.W.

40.00 Set a stone for temporary 1/4 sec. cor.

44.50 top of ridge bears N.E and S.W.

79.68 Intersect the West boundary of the township or 2nd Guide

Subdivision T. 25 S. R 112 W.

Chs. Meridian West. at corner to sections 18. 19. 13 and 24; from which corner I run; East on a true line, between sections 18 and 19.

39.68 Set a quartzite rock 20X15 X5 in. 15 in. deep in mound of stone and earth, from 4 pits each 24X12X12 in. for 1/4 sec. cor.

79.68 The corner to sections 17. 18. 19 and 20.

Eastern part valley land Soil 1st rate, balance mountainous and hollow rocky land on 53.68 chains Soil 3rd rate

No timber —

Subdivision T. 25 S. R 112

Chs.

North, between sections
17 and 18.
Vs. 16° 30' E.

29.75. A Walk ~~bears NW and~~ SE.
4000 Set a flint rock 15 X 8 X 5 in
10 in. deep, marked 1/4 on the
west side, in mound of
earth, from 4 pits each 24
12 X 12 in. for 1/4 sec. cor.
at the foot of Beaver Range
mountains bearing NE.
and S. W.

Gently rolling grassy land
covered with white sage
greasewood and shadscale
brush. Soil 2nd rate. —
No timber.

June 19th 1880

Subdivision T. 25 S. R 11 W

General description

The quality of land in this township consist chiefly of bottom and level lands, adjoining Beaver River on the west, well adapted for settlements and cultivation as having easy facilities of irrogation from Beaver River where much of land is now occupied by settlers. Utah Southern Extension Rail Road lies Easterly within a few miles distance and a main road connecting with Frisco crosses the southern portion of this township. There is ~~an~~ excellent grazing all over these lands, and an abundance of cedar timber in Beaver River Range adjoining on the west Portion of these lands along the

West boundary of the township is gently rolling, and a small portion in the N W part of the township, which is unsurveyed is mountainous—
No mineral found.

Joseph Gorlinski
Dep. Surveyor—

BOOK-A

U. S.

Sa

T

S

of

Town

of the

Execu

Unde

of the

in the

havin

correc

field

hereb

BOOK-A-169

U. S. SURVEYOR GENERAL'S OFFICE,

Salt Lake City, Utah, Aug 14 *1880*

The foregoing field notes of the survey of the Subdivisional lines of fractional

Township No 25 S. *Range No* 11 W.

of the Salt Lake Meridian, Utah Territory,

Executed by Joseph Gorlinski

Under his *contract No* 93

of the 3 *day of* June *18*79

in the month of June *1880,*

having been critically examined, the necessary corrections and explanations made, the said field notes, and the surveys they describe are hereby approved.

Geo. Salomon

U. S. Surveyor General for Utah.

Copied (Book 169 (No. 9) 181

R: 1881 BOOK-A-169

Filed July 21st 1880.

Examined by T. C. Bailey

Compared by T. C. Bailey

FIELD NOTES

OF

THE SURVEY OF THE

2nd Guide Meridian W

through ~~of~~ Township No. 16.17.18.19 S., between Ranges No. 11 & 12 W.

of the Salt Lake Meridian in Utah Territory.

BY

Joseph Gorlinski

U. S. DEPUTY SURVEYOR,

Under his Contract No. 93.

dated June 3d 1879.

Survey commenced June 22nd 1880.

Survey completed June 24th 1880.

BOOK A-169

2nd Guide Meridian West 162
T. 19. S. between Rs. 11 and 12 W.

Chs. From the established corner to townships 19 and 20 South, between ranges 11 and 12 West

I run

North on a true line between sections 31 and 36.

Va. 16° 20' E.

40.00 Set a Conglomerate rock 11X8X6 in. 7 in. deep, marked 1/4 on the west side, in mound of earth, from 4 pits each 24X12X12 in for 1/4 sec. cor. —

46.75 Granite Spring Road bears NW and SE.

80.00 Set a conglomerate rock 13X8X5 in. 8 in. deep, marked 1 notch on the south and 5 notches on the north edges, in mound of earth, from 4 pits each 24X12X12 in. for corner to sections 25 36.

2nd Guide Meridian West
T. 19 S. between Rs. 11 and 12

Chs. 30 and 31.

Valley level land, covered with chaparral and white sage brush. Soil 2nd rate.

North on a true line, between sections 25 and 30

Vs. 16° 20' E.

40.00 Set a Conglomerate rock 14 x 10 in. 5 in. 10 in. deep, marked 1/4 on the west side, in mound of earth from 4 pits each 24 x 12 x 12 in. for 1/4 sec. cor.

80.00 Set a Conglomerate rock 12 x 10 in. 8 in. deep, marked 2 notches on the south and 4 notches on the north edges, in mound of earth

2nd Guide Meridian West
T. 19 S. between Rs. 11 and 12 W

BOOK-A-169

Chs from 4 pits each 24 X 12 X 12 in
for corner to sections 24. 25
19 and 30.

Level land. Soil 2nd rate
No timber.

North, on a true line,
between sections
19 and 24.
Va. 16° 20' E.

15.00 Dry bed 25 links wide ~~[illegible]~~
draining ~~[illegible]~~ S E.

40.00 Set a Spar rock 11 X 9 X 6 in.
7 in. deep, marked 1/4 on the
west side, in mound of earth
from 4 pits, each 24 X 12 X 12 in.

165 2nd Guide Meridian West.
T. 19 S. between R°. 11 & 12

Chs. for 1/4 sec. cor.

80.00 Set a Spar rock 12X8X9 in. 8 in. deep, marked 3 notches on the south and north edges, in mound of earth, from 4 pits each 24X12X12 in. for corners to sections 13, 24, 18 and 19.

Rolling valley land.
Soil 2nd rate.
No timber.

---

vv

North on a true line between sections 13 and 18.
Va. 16° 20' E.

31.50 Beg. of dry bed creek 100 links wide

2nd Guide Meridian West
T. 19 S. between Rs. 11 and 12 W.

Chs. ~~heads~~ draining S.E. ~~and~~ heading N.E. in deep gully –

40.00 Set a conglomerate rock 20 X 10 X 4 in. 15 in. deep, marked 1/4 on the west side, in mound of earth, from 4 pits, each 24 X 12 X 12 in. for 1/4 sec. cor.

80.00 Set a limestone 15 X 12 X 6 in. 10 in deep, marked 4 notches on the south and 2 notches on the north edges in mound of earth, from 4 pits each 24 X 12 X 12 in. for corner to sections 12. 13. 7. and 18.

Rolling valley land.
Soil 2nd rate. –
No timber. –

2nd Guide Meridian West
T. 19. S. between R. 11 and 12 W.

Chs. North, on a true line, between sections 7 and 12
Va. 16° 20' E.

40.00 Set a lime stone 10 X 9 X 6 in. 6 in. deep, marked 1/4 on the west side, in mound of earth, from 4 pits each 24 X 12 X 12 in. for 1/4 sec. cor.

80.00 Set a spar rock 11 X 8 X 7 in. 7 in. deep, marked 5 notches on the south and 1 notch on the north edges, in mound of earth from 4 pits, each 24 X 12 X 12 in. for corner to sections 1, 12, 6 and 7.

Rolling valley land. 2nd rate
No timber.

June 22nd 1880

BOOK-A-169

Chs. North, on a true line,
between sections 1 and 6.
Va. 16° 20' E.

40.00 Set a lime stone 14X7X6 in. 9 in.
deep, marked 1/4 on the west
side, in mound of earth,
from 4 pits each 24X12X12 in.
for 1/4 sec. cor.

76.90 Road to Antelope Springs
bears NE and NW.

80.00 Set a Lime stone 16X8X6 in.
10 in. deep, marked 6 notches on the
south, north, east and west edges
in mound of stone and earth,
with 4 pits each 30X15X15 in for
corner to sections 1. 6. 31 and 36.
Trs. 18 and 19 S. Rs. 11 and 12 W.
from which Lime stone boulder
8 feet dia. 4 feet above ground
bears North 162 links distant.

2nd Guide Meridian West
T. 19 S. between Rs. 11 and 12 W.

Rolling valley land.
Soil 2nd rate
No timber.

General description
The land along this Meridian
in the township is level on
the south and rolling on
the North. of 2nd rate quality
There is a large proportion
of bottom valley lands visible
in the interior on the East and
West of the township, which can
be irrigated from Sevier River
No timber or mineral —

BOOK A-169

2nd Guide Meridian West. 170
T. 18 S. between Rs 11 and 12 W.

Chs. From the established corner to Townships 18 and 19 S. Ranges 11 and 12 W. I run.
North on a true line between sections 31 and 36.
Va. 16° 20' E.

23.50 dry bed 50 links wide, drains ~~bears~~ ~~N.W.~~ ~~and~~ S E

40.00 Set a limestone 15 X 8 X 5 in. 10 in. deep, marked 1/4 on the west side, in mound of earth with 4 pits each 24 X 12 X 12 in. for 1/4 sec. cor.

80.00 Set a conglomerate rock, 12 X 8 X 6 in. 8 in. deep, marked 1 notch on the south and 5 notches on the north edges, in mound of earth, with 4 pits each 24 X 12 X 12 in. for corner to sections 25. 36. 30 and 31.

Township 18 S. R. 11 W.

6	5	4	3	2	1	
7	8	9	10	11	12	
18	17	16	15	14	13	
19	20	21	22	23	24	
30	29	28	27	26	25	
31	32	33	34	35	36	

Township

6	
7	
18	
19	
30	
31	

2nd Guide Meridian West
T. 18 S. between R. 11 and 12 W.

Chs. Rolling land. Soil 2nd rate
No timber.

North on a true line,
between sections
25 and 30.
Va. 16° 20' E.

40.00 Set a cedar post 4 feet long 4x4 in. square, 1 foot deep, charred, marked 1/4 on the west side, in mound of earth 3 feet dia. 2 feet high, with 4 pits each 24x12x12 in for 1/4 sec. cor.

80.00 Set a Volcanic Rock 15x8x6 in. 10 in. deep, marked 2 notches on the south and 4 notches on the north edges, in mound of earth, from 4 pits each 24x12x12 in for corner to sections

BOOK-A-169

2nd Guide Meridian West 12

T. 18 S. between R. 11 and 12 W.

Obs. 19. 30. 24 and 25.

Rolling valley land
Soil 2nd rate. No timber.

North on a true line
between sections 19 and 24.
Va. 16° 20' E.

40.00 Set a Volcanic rock 12X8X6 in.
8 in. deep, marked 1/4 on the
west side, in mound of earth,
from 4 pits each 24X12X12 in.
for 1/4 sec. cor.

54.50 bottom land bears NW and SE.

80.00 Set a conglomerate rock 15X8X6
in. 10 in. deep, marked 3 notches
on the south and north edges, with
4 pits each 24X12X12 in. for cor.
to secs. 18. 19. 13 & 24. in mound of earth.
Rolling land Soil 2nd rate & bottoms 1st rate
No timber.

173 2nd Laude Meridian West
T. 18 S. between Rs. 11 and 12 W

Chs. North between sections.
13 and 18.
Va. 16° 20' E

40.00 Set a Cedar post charred 4 feet long 3X4 in. square 1 foot deep in a mound 3 ft dia 2 feet high with 4 pits each 24X12X12 in. marked 1/4 S. on the west side, for 1/4 sec. cor.

80.00 Set a volcanic rock 12X9X5 in. 8 in. deep, marked 4 notches on the south and 2 notches on the north edges, in mound of earth, from 4 pits, each 24X12X12 in. for corner to sections 7. 12. 13 and 18.

Level and partly rolling valley land. Soil 1st and 2nd rate. No timber.

2nd Guide Meridian W. 1/4
T. 18 S. between Rs. 11 and 12 W.

BOOK-A-169

Chs. North between sections 7 and 12.

Va. 16° 20' E

40.00 Set a conglomerate stone 14 X 8 X 5 in. 9 in. deep, marked 1/4 on the west side, in mound of earth, from 4 pits each 24 X 12 X 12 in. for 1/4 sec. cor.

80.00 Set a lime stone 12 X 9 X 5 in. 8 in. deep, marked 5 notches on the south, and 1 notch on the north edges, in mound of earth, from 4 pits, each 24 X 12 X 12 in for corner to sections 1. 6. 7. and 12.

Rolling and level valley land. Soil 2nd rate
No timber.

175 2nd Guide Meridian West
T. 18 S. between Ranges 11 and 12

Obs. North, between sections 1 and 6.

Va. 16° 20' E.

22.00 Wash 20 links wide ~~[illegible]~~ drains E ~~[illegible]~~

40.00 Set a Volcanic rock 12 X 8 X 6 in 8 in deep marked 1/4 on the west side, in mound of earth from 4 pits each 24 X 12 X 12 in. for 1/4 sec. cor.

80.00 Set a chiseled cedar post 4 feet long 4 X 4 in: square, 1 foot deep in mound of earth and stone with 4 pits each 30 X 15 X 15 in. for corner to townships 17 and 18 S. Ranges 11 and 12 W.

Level land. Soil 1st rate

No timber.

June 23d 1880

General description

The land along this Meridian is rolling on the south and level on the north ~~[illegible]~~ 2nd rate soil, with 1st rate bottoms

No timber or mineral.

BOOK-A-169

2nd Guide Meridian W.
T. 17. S. between Rs 11 and 12 W.

Chs. From the established corner to Tps. 17 and 18 S. Rs 11 and 12 W.

Orun.

North, between sections 31 and 36.

Va. 16° 20' E.

40.00 Set a lime stone 12 X 12 X 4 in. 8. in. deep, marked 1/4 on the west side in mound of earth, from 4 pits each 24 X 12 X 12 in. for 1/4 sec. cor.

44.40 Wash 25 links wide, ~~bears NW and~~ drains SE

74.25 Road from Sevier to Antelope Springs bears NW and SE.

80.00 Set a lime stone 13 X 8 X 5 in. 8 in. deep, marked 1 notch on the south and 5 notches on the north edges, in mound of earth, from 4 pits each 24 X 12 X 12 in. for corner to sections 30. 31. 25 and 36.

Level valley land. Soil 1st rate

No timber.—

BOOK-A-169

Township 17 S. **R.** 11 W.

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

117 2nd Guide Meridian
T. 17 S. between Rs. 11 and 12 W.

Chs. North between sections
25 and 30.
Va. 16° 20' E.

40.00 Set a lime stone 12X7X6 in. 8 in. deep, marked 1/4 on the west side, in mound of earth from 4 pits each 24X12X12 in. for 1/4 sec. cor.

80.00 Set a lime stone 12X8X6 in. 8 in. deep, marked 2 notches on the south and 4 notches on the north edges, in mound of earth from 4 pits each 24X12X12 in. for corner to sections 19.24.25 and 30.

Level land. Soil 1st rate
mixt grass; No timber

2nd Guide Meridian
T. 17 S. bet. Rs. 11 and 12 W.

BOOK-A-169

Obs. North between sections
19 and 24.
Va. 16° 20' E.

40.00 Set a lime stone 10X10X6 in.
6 in. deep, marked 1/4 on the
west side, in mound of earth
from 4 pits each 24X12X12
in. for 1/4 sec. cor.

80.00 Set a lime stone 12X8X6 in.
8 in. deep, marked 3 notches
on the south and north edges
in mound of earth, from 4
pits each 24X12X12 in. for
corner to sections 13, 18, 19,
and 24.

Level Land; Soil 1st rate;
No timber.

119 2nd Guide Meridian West
T. 17 S. between Rs. 11 and 12 W.

Chs. North between sections 13 and 18.
Va. 16° 20' E.

40.00 Set a charred cedar post 4 feet long 3X4 in. square 1 foot deep in mound of earth with 4 pits each 24X12X12 in. for 1/4 sec. cor.

67.40. Road bears NE. and SW.

80.00 Set a cedar charred post 4 feet long 3X4 in. square 1 foot deep in mound of earth, from 4 pits each 24X12X12 in. marked 2 notches on the north and 4 on the south, for corner to sections 7 12. 13 and 18.

Level land. Soil 1st rate. No timber.

North between sections 7 and 12
Va. 16° 20' E.

40.00 Set a charred cedar post 4 feet long 3X4 in. square 1 foot deep. marked 1/4 S on the west side, in mound of earth from 4 pits each 24X12X12 in. for 1/16 sec. cor.

2nd Guide Meridian West 180

T. 17 S. between Rs. 11 and 12 W.

BOOK-A-169

Chs.

61.00 Road bears NW and SE.

80.00 Set a charred cedar post, 4 feet long 4X4 in. square 1 foot deep, in mound of earth, from 4 pits each 24X12X12 in. marked 5 notches on the south and 1 notch on the north edges for corner to secs. 1, 12, 6 and 7.

Level land. Soil 1st rate. No timber.

North between sections 1 and 6.

Va. 16° 20' E.

10.15 Old road bears SW and NE.

40.00 Set a charred cedar post, 4 feet long 3X4 in. square 1 foot deep, in mound of earth from 4 pits each 24X12X12 in. for 1/4 sec. cor.

80.00 Set a charred Pinyon Pine post, 4 feet long 4X4 in. square, 1 foot deep, in mound of earth from 4 pits each 30X18X18 in. marked 6 notches on the S. N. E. and W edges for cor to Ts. 16 and 17 S. Rs. 11 and 12 W. Land level. Soil 1st rate. No timber.

2nd Guide Meridian W.
T. 16 S. between Rs. 11 and 12 W.

Chs. From the established corner to Tps. 16 and 17 S. Ranges 11 and 12 W. I run.

North between sections 31 and 36.

Va. 16° 20' E.

40.00 Set a charred cedar post 4 feet long 3 X 4 in. square 1 foot deep, in mound of earth, from 4 pits each 24 X 12 X 12 in. for 1/4 sec. cor. marked 1/4 S. on the west side

73.65 Road to Swassie's Springs bear N. about 5 miles distance. ~~and S.E.~~

80.00 Set a lime stone 14 X 12 X 8 in. 9 in. deep marked 1 notch on the south and 5 notches on the north edges, in mound of earth, from 4 pits each 24 X 12 X 12 in. for corner to sections 25. 30. 31. and 36.

Level land with grass. Soil 1st rate

No timber

BOOK-A-169

Township 169 **R.** 11 W

181	6	5	4	3	2	1
181	7	8	9	10	11	12
183	18	17	16	15	14	13
183	19	20	21	22	23	24
182	30	29	28	27	26	25
181	31	32	33	34	35	36

Township

218		
211	6	
210	7	
209	18	
207	19	
206	30	
205	31	

2nd Guide Meridian W.
T. 16 S. between R. 11 and 12 W.

BOOK-A-169

Obs. North between sections 25 and 30.
Va. 16° 20' E.

40.00 Set a charred cedar post 4 feet long 4x4 in. square, 1 foot deep, in mound of earth from 4 pits each 24x12x12 in. marked 1/4 S. on the west side for 1/4 sec. cor.

80.00 Set a limestone 15x10x4 in. 10 in. deep, marked 2 notches on the south and 4 notches on the north edges, in mound of earth from 4 pits each 24 x12x12 in. for corner to sections 24. 25. 19 and 30

Level land. Soil 1st rate. No timber.

June 23d 1880.

North between sections 19 and 24.
Va. 16° 20' E.

40.00 Set a charred cedar post 4 feet long 4x4 in. square, 1 foot deep in mound of earth from 4 pits each 24x12x12 in. for 1/4 sec. cor. marked 1/4 S. on the west side.

62.50 dry creek bed 30 lks wide ~~bears NW~~ [illegible]

80.00 Set a lava rock 13X8X6 in. 8 in deep marked 3 notches on the south and north edges, in mound of earth, from 4 pits each 24X12X12 in. for corner to sections 13. 18. 19. and 24.

Level land. Soil 1st rate. No timber

North between sections 13 and 18
Va. 16° 20' E.

40.00 Set a cedar charred post 4 feet long 3X4 in. square, 1 foot deep, in mound of earth from 4 pits each 24X12X12 in marked 1/4 S. on the west side with 4 pits each 24X12X12 in for 1/4 sec. cor

80.00 Set a Lava rock 11X9X5 in. 7 in deep, marked 4 notches on the south and 2 notches on the north edges in mound of earth from 4 pits each 24X12X12 in for corner to sect. 12. 13. 7 and 18.

BOOK-A-169

2nd Guide Meridian West
T. 16 S. between R.s 11 and 12 W.

Chs. Level land. Soil 1st rate. No timber

North between sections 7 and 12
Va. 16° 20' E.

40.00 Set a black sand stone 16X8X5 in. 10 in. deep, marked 1/4 on the west side, in mound of earth, from 4 pits, each 24X12X12 in. for 1/4 sec. cor.

80.00. Set a black sand stone 11X8X7 in 7 in deep, marked 5 notches on the south and 1 notch on the north edges in mound of earth from 4 pits each 24X12X12 in. for corner to sections 1. 6. 7 and 12.

Level land. Soil 1st rate. No timber.

North, between sections 1 and 6.
Va. 16° 20' E.

27.00 Bench land bears NE and SW.

40.00 Set a black sand stone 12X7X7 in.

2nd Guide Meridian West
T. 16 S. between Rs. 11 and 12 W

Chs. 8 in. deep. marked 1/4 on the west side, in mound of earth, from the pits each 24 X 12 X 12 in. for 1/4 sec.

106.92 Intersect the 3d Standard Parallel South, 41.30 Chs. West from Standard corner to Secs. 31 and 36. Township 15 S. bet. Rs. 11 and 12 West on said Standard Parallel South previously established. where I set a sand stone 16 X 9 X 6 in. 10 in. deep, in mound of stone and earth, with 3 pits, each 30 X 18 X 18 in. marked 6 notches on the S.E. & W. edges with C.C on south side, for closing corner to Township 16 S. between Ranges 11 and 12 West

Rolling valley land. Soil 2nd rate

No timber.

June 24th 1880

General description

The land along this Guide Meridian is mostly rolling 2nd rate, with fair proportion of level valley land of 1st rate quality - No timber or mineral.

Joseph Gorlinski
deputy surveyor.

BOOK-A-169

U. S. SURVEYOR GENERAL'S OFFICE,

Salt Lake City, Utah, Aug 14 1880

The foregoing field notes of the survey of the 2d Guide Meridian West through

Townships No 16, 17, 18 & 19 S between *Ranges* No 11 & 12 W.

of the Salt Lake Meridian, Utah Territory,

Executed by Joseph Gorlinski

Under his *contract No* 93

of the 3 *day of* June 1879.

in the month of June 1880,

having been critically examined, the necessary corrections and explanations made, the said field notes, and the surveys they describe are hereby approved.

Fred. Salsbury.

U. S. Surveyor General for Utah.

BOOK-A-169

Township 19 S **R.** 11 W

	201	200	198	199	195	194
168	6	5	4	3	2	1	193
169	7	8	9	10	11	12	192
165	18	17	16	15	14	13	191
164	19	20	21	22	23	24	190
163	30	29	28	27	26	25	189
162	31	32	33	34	35	36	188

Copied Book 169 (No. 10)

R: 188 / BOOK-A-169

Filed July 21st 1880.

Examined by T. C. Bailey

Compared by T. C. Bailey

FIELD NOTES

OF

THE SURVEY OF THE

East and North Boundaries

of Township No. 19 S., Range No. 11 W.

of the Salt Lake Meridian in Utah Territory.

BY

Joseph Gorlinski

U. S. DEPUTY SURVEYOR,

Under his Contract No. 93

dated June 3d 1879

Survey commenced June 25th 1880.

Survey completed June 26th 1880.

BOOK-A-169

East Boundary T. 19 S. R. 11 W.

Chs. From corner to Townships 19 and 20 S. Ranges 10 and 11 West. I run.

North on a true line between sections 31 and 36.

Va. 16°20' E.

26.00 Old road bears NE and SW.

40.00 Set a lime stone 10X9X8 in. 6 in. deep, marked 1/4 on the west side in mound of earth, from 4 pits each 24X12X12 in. for 1/4 sec. cor.

47.50 Wash 20 links wide, ~~bears NE~~ draining E. & W.

80.00 Set a lime stone 12X8X6 in. 8 in. deep, marked 1 notch on the south and 5 notches on the north edges in mound of earth, from 4 pits each 24X12X12 in. for corner to sections 25. 36. 30 and 31.

Level land. Soil 2nd rate. covered with greasewood brush No timber.—

189

East boundary T. 19 S. R. 1 W.

Chs. North on a true line between sections 25 and 30.
Var. 16° 20' E.

9.00 Road bears N.E. and S.W.

40.00 Set a lime stone 12 X 9 X 5 in. 8 in. deep, marked 1/4 on the west side, with 4 pits each 24 X 12 X 12 in. in mound of earth, for 1/4 sec. cor.

80.00 Set a lime stone 12 X 9 X 6 in. 8 in. deep, marked 2 notches on the south and 4 notches on the north edges, in mound of earth, with 4 pits each 24 X 12 X 12 in. for corner to sections 24, 25, 19 and 30.

Level valley land - Soil 1st rate - No timber -

BOOK-A-169

East boundary T. 19 S. R. 11 W.

Chs. North, on a true line, between sections 19 and 24.
Va. 16° 20' E.

40.00 Set a lime stone 12 X 8 X 6 in 8 in deep, marked 1/4 on the west side, in mound of earth, from 4 pits each 24 X 12 X 12 in. for 1/4 sec. cor.

43.50 Wash 25 links wide ~~bears NW~~ ~~and~~ drains S E.

80.00 Set a lime stone 10 X 9 X 5 in. 6 in. deep, marked 3 notches on the south and north edges in mound of earth, from 4 pits each 24 X 12 X 12 in. for corner to sections 13. 24. 18 and 19.

Rolling valley land.
Soil 2nd rate. No timber.

19

East boundary T. 19 S. R. 11 W

Chs. North on a true line, between sections 13 and 18
Va. 16° 20' E.

40.00 Set a limestone 11X8X9 in. 7 in. deep, marked 1/4 on the west side in mound of earth, with 4 pits each 24X12X12 in. for 1/4 sec. cor.

59.00 Work 50 links wide, ~~been~~ drains NE. ~~and SW.~~

80.00 Set a limestone 12X8X6 in. 8 in. deep, marked 4 notches on the west and 2 notches on the north edge in mound of earth, from 4 pits each 24X12X12 in. for corner to sections 12. 13. 7 and 18

Southern part level. North end rolling land. Soil 2nd rate
No timber.-

Ea

Chs.

18.00

40.00

80.00

East boundary T. 19 S. R 11 W.

Chs. North on a true line between sections 7 and 12

Va. 16°20' E.

18.00 Wash 15 links wide ~~bears W. and~~ drains E.

40.00 Set a lime stone 11X10X7 in. 7 in. deep. marked 1/4 on the west side, in mound of earth, from 4 pits each 24X12X12 in. for 1/4 sec. cor.

80.00 Set a limestone 14X8X6 in. 9 in. deep. marked 5 notches on the south and 1 notch on the north edges. In mound of earth, from 4 pits each 24X12X12 in. for corner to sections 1. 12. 6. and 7.

Rolling land. Soil 2nd rate.

No timber—

193

East boundary T. 19 S. R 11 W.

Chs. North on a true line, between sections 1 and 6.

Va 16° 20' E.

18.00 dry gully 50 links wide ~~trains~~ NE

40.00 Set a limestone 11X8X6 in. 7 in. deep, in mound of earth, from 4 pits each 24X12X12 in. for 1/4 sec. cor.

51.75 Road from Miller's Ranch to Antelope Springs bears NW and SE.

80.00 Set a limestone 15X9X7 in. 10 in. deep, marked 6 notches on the south, north, east and west edges for corner to sections 1. 6. 31 and 36. Tps. 18 and 19. W. R. 10 and 11 W. in mound of stone and earth from 4 pits each 30X18X18 in.—

Gently rolling land. Soil 2nd rate. No timber.

June 25th 1880.

BOOK-A-169

North boundary T. 19 S. R. 11 W.

Chs. From corner to Tps. 18 and 19 S. Ranges 11 and 12 West in the 2nd Guide Meridian West previously established I run; East with Va. 16° 20' E. on a random line between said townships — and set temporary half mile and mile stones at every 40 and 80 chs. and at 5 mile 79 chs and 24 links to a point 42 links south from corner to townships 18 and 19 South. Ranges 10 and 11. W.

from which I run S. 89° 57' W on a true line between sections 1 and 36.

Va. 16° 20' E.

40.00 Set a limestone 10 X 9 X 6 in. 6 in. deep, marked 1/4 on the north side, in mound of earth from

#195

North boundary T. 19 S. R 11 W

Obs. - 4 pits each 24 X 12 X 12 in. for 1/4 sec. cor.

8000 Set a flint stone 11 X 9 X 6 in. 6 in deep, marked 1 notch on the east and 5 notches on the west edge, in mound of earth, from 4 pits each 24 X 12 X 12 in for corner to sections 1. 2 35 and 36

Valley land. Soil 2nd rate
No timber.

S 89° 57' W on a true line between sections 2 and 35
Var. 16° 20' E.

36.90 same road bears S.E. and N.W.

40.00. Set a cubical limestone 1. X 11 X 11

BOOK-A-169

North Boundary T. 19 S. R. 11 W.

Chs. in. 7 in. deep, marked 1/4 on the north side, in mound of earth, with 4 pits each 24 X 12 X 12 in. for 1/4 sec. cor.

68.50 Wash 20 links wide ~~[illegible]~~ drains S.W. & N.E. ~~and S.W.~~

80.00 Set a limestone 15 X 10 X 6 in. 10 in. deep, marked 2 notches on the east and 4 notches on the west edges, in mound of earth, with 4 pits each 24 X 12 X 12 in. for corner to sections 2. 3. 34 and 35

Level valley land. Soil 2nd rate. No timber —

North boundary T. 19 S. R. 11 W

Chs. S. 89° 57' W. on a true line between sections 3 and 34.

Va. 16° 20' E.

15.00 leave valley and enter mountainous ridge land bearing N.E. and S.W.

38.50 top of mountain bears N.E. and S.W.

40.00 Set a limestone 15 X 12 X 5 in. 10 in. deep, marked 1/4 on the north side, in mound of earth, from 4 pits each 24 X 12 X 12 in. for 1/4 sec. cor.

47.50 Ravine ~~bears N.E. and~~ drains S.W.

67.20 Ravine ~~bears N.E. and~~ drains S.W.

72.80 Ravine ~~bears N. and~~ drains S.

80.00 Set a sand stone 16 X 7 X 7 in. 10 in deep, marked 3 notches on the east and west edges, in mound of stone and earth, from 4 pits each 24 X 12 X 12 in. for corner to sections 3. 4. 33 and

BOOK-A-169

North boundary T. 19 S. R. 11 W.

Chs. 34.—

Mountainous rocky ridge land
Soil 3rd rate except on the
East end which is in rolling
valley. Soil 2nd rate
No timber—

S. 89° 57' W. on a true line
between sections 4 and 33
Va. 16° 20' E.

2.05 Antelope road bears NE and SW.
7.00 Ravine ~~bears NE and~~ drains SW.
13.00 Ravine ~~bears NE and~~ drains S.W.
28.00 leave mountain. and enter rolling
valley land bearing N and S.
40.00 Set a lime stone 14X10X6 in.

199 - 199

North boundary T. 19 S. R. 11 W.

Chs. 9 in. deep, marked 1/4 on the north side, in mound of earth. Given 4 pits each 24X12X12 in. for 1/4 sec. cor.

58.00 Grassy ravine 2.00 chs wide ~~bears N.~~ drains S.

60.00 Antelope road bears S.E. and N.W.

80.00 Set a lime stone 14X10X8 in. 9 in. deep, marked 4 notches on the east and 2 notches on the west edges, in mound of earth. Given 4 pits each 24X12X12 in. for corner to sections 4, 5, 32 and 33.

Valley level land. Soil 1st rate and grassy. West and mountainous on 28.00 chains. Soil 3d rate. No timber.

North

Chs.

40.00

80.00

North Boundary, T. 19 S. R. 11 W.

Chs. S. 89° 57' W. on a true line, between sections 5 and 32
Va. 16° 20' E

40.00 Set a sand stone 14X8X6 in. 9 in. deep, marked 1/4 on the north side, in mound of earth, from 4 pits each 24X12X12 in. for 1/4 sec. cor.

80.00 Set a lime stone 13X8X6 in. 8 in. deep, marked 5 notches on the east and 1 notch on the west edges, with 4 pits each 24X12X12 in. in mound of earth, for corner to sections 5. 6. 31. and 32.

Level valley grassy land.
Soil 1st rate.
No timber.—

North Boundary T. 19 S. R 11 W

Chs. S. 89° 57' W. on a true line between sections 6 and 31.
Va. 16° 20' E

19.00 Rolling valley bears NE and SW.

40.00 Set a lime stone 13 X 8 X 5 in. 8 in. deep. marked 1/4 on the north side. in mound of earth, with 4 pits each 24 X 12 X 12 in. for 1/4 sec. cor.

58.00 Antelope road bears NE and SW.

79.24 The corner to sections. 1. 6. 31 and 36. Tps. 18 and 19 S. Rs. 11 and 12 West on the 2nd Guide Meridian West previously established—

Rolling valley land. Soil 2nd rate. No timber—

June 26th 1880.

BOOK-A-169

North boundary T. 19 S. R. 11 W.

General description

This township lies in the valley north of Sevier River and Lake and closely adjoining the same. The quality of land is generally 2nd rate. There is a large proportion of good bottom land which can be irrigated by Sevier River. No timber or mineral.

Joseph Gorlinski
U.S. deputy surveyor.

BOOK-A-169

U. S. SURVEYOR GENERAL'S OFFICE,

Salt Lake City, Utah, Aug 14 1880

The foregoing field notes of the survey of the East and North boundaries of

Township No 19 S. *Range No* 11 W.,

of the Salt Lake Meridian, Utah Territory,

Executed by Joseph Gorlinski

Under his *contract No* 93

of the 3 *day of* June 1879

in the month of June 1880,

having been critically examined, the necessary corrections and explanations made, the said field notes, and the surveys they describe are hereby approved.

Fred. Salomon

U. S. Surveyor General for Utah.

Copied Book 169 (N.W.)

R: 1881 BOOK-A-169 204

Filed July 21st 1880.

Examined by T. C. Bailey

Compared by T. C. Bailey

FIELD NOTES

OF

THE SURVEY OF THE

West and North boundaries

of Township No. 19 S., Range No. 12 W.

of the Salt Lake Meridian in Utah Territory.

BY

Joseph Gorlinski

U. S. DEPUTY SURVEYOR,

Under his Contract No. 93.

dated June 3d 1879.

Survey commenced June 27th 1880.

Survey completed June 28th 1880.

BOOK-A-169

Township 19 S. R. 15 W

	218	217	216	215	214	213
211	6	5	4	3	2	1
210	7	8	9	10	11	12
209	18	17	16	15	14	13
208	19	20	21	22	23	24
207	30	29	28	27	26	25
206	31	32	33	34	35	36

BOOK-A-169

West boundary T. 19 S. R. 12 W.

Chs. From the established corner to townships 19 and 20 South between ranges 12 and 13 West

I run

North on a true line, between sections 31 and 36.

Va. 16° 20' E.

6.50 Wash 15 links wide ~~been [illegible]~~ drains SE.

15.00 Wash 20 links wide ~~been [illegible]~~ drains SE.

32.50 Wash 15 links wide ~~been [illegible]~~ drains SE.

40.00 Set a limestone 14X12X10 in 9 in. deep, marked 1/4 on the west side, in mound of earth. from 4 pits each 24X12X12 in. for 1/4 sec. cor.

78.25 Wash 15 links wide bears SE and NW

80.00 Set a limestone 15X10X6 in 10 in. deep, marked 1 notch on the south and 5 notches on the north edges, in mound of earth.

West boundary, T. 19 S. R. 12 W.

Chs. From 4 pits each 24 X 12 X 12 in.
for corner to sections 30. 31. 25
and 36.

Rolling land. Soil 2nd rate
No timber.

North on a true line between
sections 25 and 30.
Va. 16° 20' E.

22.00 Wash 15 links wide, drains SE
40.00 Set a limestone 15 X 10 X 5 in.
10 in. deep, marked 1/4 on the
west side, in mound of earth
From 4 pits each 24 X 12 X 12
in. for 1/4 sec. corner.

70.50 Dry Creek 150 links wide, rises
heads from springs at Granite
rock near the summit of Antelope

BOOK-A-169

mountains lying Westerly about
5 miles distant; and ~~begins~~ contains S.E.
80.00 Set a lime stone 15 X 8 X 8 in 10 in.
deep. marked 2 notches on the
south and 4 notches on the
north edges. in mound of
earth. with 4 pits each 24
X 12 X 12 in. for corner to sec-
tions 24. 25. 19. and 30.

Rolling valley land. Soil
2nd rate. No timber –

North on a true line, between
sections 19 and 24.
Va. 16° 30' E.
7.50 Granite Spring Road bears NW.

West boundary T. 19 S. R. 12 W.

Bhs. and S. E. from which Granite springs bear N. 78° W about 6 miles distant —

30.80 Wash 20 links wide. ~~[illegible]~~ ~~[illegible]~~ drains ~~[illegible]~~ S. E.

40.00 Set a limestone 20 X 9 X 6 in. 15 in. deep, marked 1/4 on the west side in mound of earth, with 4 pits each 24 X 12 X 12 in. for 1/4 sec. cor.

45.00 Small wash ~~[illegible]~~ drains E ~~[illegible]~~

64.50 " " ~~[illegible]~~ drains S.

80.00 Set a limestone 14 X 10 X 8 in. 9 in. deep, marked 3 notches on the south and north edges in mound of earth from 4 pits each 24 X 12 X 12 in. for corner to sections 13. 24. 18 and 19.

Rolling land.

Soil 2nd rate. No timber.

BOOK-A-169

West boundary T. 19 S. R. 12 W.

Obs. North on a true line between sections 13 and 18

Va. 16° 20' E.

1.50 Wash 25 links wide ~~bears~~ ~~NW~~ drains NE.

40.00 Set a lime stone 14 X 10 X 6 in. 9 in. deep, marked 1/4 on the north side in mound of earth, from 4 pits each 24 X 12 X 12 in. for 1/4 sec. cor.

57.00 Wash 20 links wide ~~bears~~ drains NE ~~NW~~

64.50 Old Road bears N.E. and S.W.

80.00 Set a lime stone 14 X 10 X 7 in. 9 in. deep, marked 4 notches on the south and 2 notches on the north edges, in mound of earth, from 4 pits each 24 X 12 X 12 in. for corner to sections 12, 13, 7 and 18.

Rolling land. Soil 2nd rate. No timber.—

#210

West Boundary T. 19 S. R 12 W

Chs. North on a true line, between sections 7 and 12.

Va. 16° 30' E

20.10 A creek 20 links wide ~~[illegible]~~ ~~[illegible]~~ drains S. E.

40.00 Set a limestone 15 X 8 X 6 in. 10 in. deep, marked 1/4 on the west side, in mound of earth, from 4 pits each 24 X 12 X 12 in. for corner to 1/4 section corner.

80.00 Set a limestone 13 X 10 X 6 in. 8 in. deep, marked 5 notches on the south and 1 notch on the north edges, in mound of earth, from 4 pits each 24 X 12 X 12 in. for corner to sections 1. 12. 6. and 7.

Rolling land. Soil 2nd rate. No timber.

BOOK-A-169

West Boundary T. 19 S. R. 12 W.

Bhs. North on a true line, between sections 1 and 6.
Va. 16° 30' E.

11.00 dry creek bed 50 links wide heads NW. bears S.E.

31.50 small wash ~~bears NW~~ ~~and~~ drains S.E.

40.00 Set a limestone 15 X 10 X 5 in 10 in. deep, marked 1/4 on the north side in mound of earth, with 4 pits each 24 X 12 X 12 in. for 1/4 sec. cor.

77.50 Wash 25 links wide ~~bears NW~~ ~~and~~ drains S.E.

80.00 Set a limestone 22 X 15 X 10 in 17 in. deep, marked 6 notches on the north, south, east and west edges, in mound of stone and earth, with 4 pits each 36 X 18 X 18 in for corner to secs. 1. 6. 31 and 36. T. 18 and 19 S. Rs. 12 and 13 W.

Rolling Land. Soil 2nd rate
No timber. —

June 27th 1880

#212

North boundary T. 19 S. R. 12 W.

Chs. From the corner to Townships 18 and 19 S. R. 12 and 13 W. I run west Va. 16° 20' E.

East on a random line between said townships and set temporary half and mile stones at every 40 and 80 chains, and at 5 miles. 79 chains and 40 links to a point on the 2nd Guide Meridian West. 68 links South from corner to Townships 18 and 19 S. Ranges 11 and 12 W. from which corner I run:

S. 89° 55' W on a true line between sections 1 and 36.

Va. 16° 20' E.

24.50 Road to Antelope Springs from Senier River bears NW and SE.

40.00 Set a lime stone 14 X 8 X 5 in.

BOOK-A-169

North Boundary T. 19 S. R. 12 W.

Chs. 9 in deep. marked 1/4 on the north side in mound of earth with 4 pits each 24X12X12 in for 1/4 sec. cor.

80.00 Set a lime stone 13X7X5 in. 8 in. deep. marked 1 notch on the east and 5 notches on the west edge in mound of earth, from 4 pits each 24X12X12 in. for corner to sections 1. 2. 35 and 36.

Gently rolling land. Soil 2nd rate. White sage greasewood and shadscale undergrowth with grass.

No timber. —

North Boundary T. 19 S. R. 12 W.

Chs. S. 89° 55' W. on a true line, between sections 2 and 35.

Va. 16° 20' E.

33.00 dry creek bed 100 links wide, ~~bears~~ drains N.E. ~~and S.W.~~

40.00 Set a cobble stone 11 X 8 X 6 in. 7 in. deep, marked 1/4 on the north side in mound of earth, from 4 pits, each 24 X 12 X 12 in. for 1/4 sec. cor.

41.00 Same Creek ~~bears N.W. and~~ drains S.E.

46.00 Same Creek ~~bears~~ drains N.E. ~~and S.W.~~

55.50 Wash 40 links wide ~~bears N.W. and~~ drains S.E.

64.50 Small wash ~~bears~~ drains N.E. ~~and S.W.~~

80.00 Set a limestone 12 X 8 X 5 in. 8 in. deep, marked 2 notches on the east and 4 notches on the west edges in mound of earth, from 4 pits each 24 X 12 X 12 in. for corner to sections 2. 3. 34 and 35.

North

Chs.

25.00

40.00

75.16

80.00

North boundary T. 19 S. R 12 W.

Ch. Valley lands. Soil 1st and 2d rate.
No timber.

S. 89° 55' W on a true line between sections 3 and 34.
Va. 16° 20' E.

25.00 Wash ~~bears~~ drains NE ~~and SW~~

40.00. Set a limestone 13 X 7 X 6 in. 8 in deep, marked 1/4 on the north side, in mound of earth, from 4 pits each 24 X 12 X 12 in. — for 1/4 sec. cor.

75.16 Small wash ~~bears NE and~~ drains SW.

80.00 Set a Limestone 12 X 12 X 8 in. 8 in. deep, marked 3 notches on the east and west edges, in mound of earth from 4

North Boundary. T. 19 S. R 12 W.

Chs. pits each 24 X 12 X 12 in. for corner to sections 3. 4. 33 and 34.

Land level. Soil 1st rate
No timber.

S. 89° 55' W on a true line between sections 4 and 33.
Va. 16. 20' E.

13.25 Wash ~~bears N.W. and~~ drains S.E.
29.40 Wash ~~bears N.W. and~~ drains S.E.
40.00 Set a lime stone 12 X 8 X 8 in. 8 in. deep. marked 1/4 on the north side in mound of earth; from 4 pits each 24 X 12 X 12 in. for 1/4 sec. cor.
43.90 Small wash. drains SW.
80.00 Set a lime stone 16 X 12 X 8 in. 10 in deep. marked 4 notches on the east

Chs. and 2 notches on the west edges, in mound of earth. Pits each 24 X 12 X 12 in. for corner to sections 4. 5. 32 and 33.

Level valley land. Soil 1st rate. No timber.

S. 89° 55' W on a true line between sections 5 and 32

Va. 16° 20' E.

29.00 Wash 20 links wide ~~[illegible]~~ drains 8

40.00 Set a lime stone 12 X 12 X 10 in. 8 in. deep, marked 1/4 on the north side, in mound of earth. Pits each 24 X 12 X 12 in. for 1/4 sec. cor.

80.00 Set a lime stone 12 X 12 X 8 in. 8 in

North boundary. T. 19 S. R. 12 W.

Chs. deep, marked 6 notches on the east and 1 notch on the west edges, in mound of earth, from 4 pits each 24 X 12 X 12 in. for corners to sections 31. 32. 5 and 6.

Level valley land overgrown by white sage and shadscale brush. Soil 1st rate. — No timber.

S. 89° 55' W. on a true line, between sections 6 and 31.

Va. 16° 20' E.

20.00 Rolling land bears N. and S.

40.00 Set a Lime stone 12 X 12 X 6 in. 8 in. deep, marked 1/4 on the north side, in mound of earth, from

BOOK-A-169

North Boundary. T. 19 S. R 12 W

Obs. 4 pits each 24 x 12 x 12 in 1/4 sec. cor.

55.00 enter dry creek bed 60 link wide ~~heads~~ heads West and drains S. E.

60.50 leave it ~~heading West and~~ draining East.

79.40 The corner to Townships 18 and 19 S. between Ranges 12 and 13. West.

Rolling valley land. Soil 2nd rate. East end level. Soil 1st rate.

June 28th 1880

General description.

This township contains a considerable proportion of good bottom land well adapted for cultivation. It is situated North westerly

from the mouth of Sevier River about ½ mile distant and can be irrigated.- It also adjoins the flats along the north Margin of Sevier Lake.- The land along the Western Boundary is gently rising and rolling of 2nd rate quality.- There is no timber or any indications of mineral.-

Joseph Gorlinski
U,S, deputy surveyor.

BOOK-A-169

221

U. S. SURVEYOR GENERAL'S OFFICE,

Salt Lake City, Utah, Aug 14 *1880*

The foregoing field notes of the survey of the West & North boundaries of

Township No 19 S. *Range No* 12 W.

of the Salt Lake Meridian, Utah Territory,

Executed by Joseph Gorlinski

Under his *contract No* 93

of the 3 *day of* June *1879*

in the month of June *1880*

having been critically examined, the necessary corrections and explanations made, the said field notes, and the surveys they describe are hereby approved.

Fred. Salomon

U. S. Surveyor General for Utah.

Copied Book 169 (No. 12)

R: 1881 BOOK-A-169 222

Filed July 21st 1880.

Examined by F. C. Bailey

Compared by F. C. Bailey

FIELD NOTES

OF

THE SURVEY OF THE

West and North Boundaries

of Township No. 18 S., Range No. 12 W.

of the Salt Lake Meridian in Utah Territory.

BY

Joseph Gorlinski

U. S. DEPUTY SURVEYOR,

Under his Contract No. 93.

dated June 3d 1879.—

Survey commenced June 29th 1880.

Survey completed June 29th 1880.

BOOK-A-169

Township 18 S **R.** 19 W

	235	234	233	232	231	229
228	6	5	4	3	2	1
227	7	8	9	10	11	12
226	18	17	16	15	14	13
225	19	20	21	22	23	24
224	30	29	28	27	26	25
223	31	32	33	34	35	36

West boundary T. 18 S. R. 12 W.

Chs. From the established corner to Townships 18 and 19 S. Ranges 12 and 13 W.

I run.

North between sections 31 and 36.

Va. 16° 20 E.

29.70. Wash 20 links wide heads N.W. bears S.E.

40.00 Set a lime stone 12 X 9 X 5 in 8 in deep, marked 1/4 on the west side, in mound of earth from 4 pits each 24 X 12 X 12 in for 1/4 sec. cor.

80.00 Set a lime stone 17 X 8 X 6 in. 11 in deep, marked 1 notch on the south, and 5 notches on the north edges, in mound of earth, from 4 pits each 24 X 12 X 12 in. for cor. to secs. 30. 31. 25 and 36.

Rolling Valley soil 2d rate No timber.

West boundary T. 18 S. R. 12 W.

Chs. North between sections 25 and 30

Va. 16° 20' E.

25.50 Wash ~~bears N.W. and~~ ~~[illegible]~~ drains S.E.

40.00 Set a limestone 13 X 7 X 5 in. in. deep. marked 1/4 on the west side in mound of earth from 4 pits, each 24 X 12 X 12 in. for 1/4 sec. cor.

80.00 Set a limestone 16 X 8 X 6 in. 10 in. deep, marked 2 notches on the south and 4 notches on the north edges, in mound of earth, from 4 pits each 24 X 12 X 12 in. for corner sections 19. 30. 24. and 25

Rolling valley land. Soil 2nd rate. No timber.

West boundary T. 18 S. R 12 W.

Chs. North between sections 19 and 24.

Va. 16° 20' E

17.40 Wash ~~bears~~ drains E ~~and W~~.

37.15 dry bed 25 links wide ~~bears~~ ~~W.W.~~ ~~and~~ drains S E.

40.00 Set a sand stone 16 X 6 X 6 in. 10 in. deep, marked 1/4 on the west side, in mound of earth from 4 pits each 24 X 12 X 12 in. for 1/4 sec. cor.

80.00 Set a lime stone 18 X 8 X 5 in. 12 in. deep marked 3 notches on the south and north edges. in mound of earth, from 4 pits, each 24 X 12 X 12 in. for corner to sections 7. 18. 12 and. 13.

Rolling valley land.

Soil 2nd rate. No timber.

West boundary T. 18 S. R. 12

Chs. North between sections
13 and 18
Va. 16° 20' E.

10.25 Wash ~~bears NW and~~ drains SE.
18.30 Road ~~bears~~ bears NW. and SE.
40.00 Set a lime stone 14X8X5 in. 9 in. deep, marked 1/4 on the west side, in mound of earth, for 4 pits each 24X12X12 in. for 1/4 sec. cor.
60.30 Wash ~~bears~~ drains E. ~~and SE.~~
80.00 Set a limestone 15X6X6 in. in. deep, marked 4 notches on the south and 2 on the east edges, in mound of earth for 4 pits each 24X12X12 in. for cor. to sections 7, 12, 13 and 18. —

Rolling valley land —
Soil 2nd rate. No timber.

West boundary T. 18 S. R. 12 W.

Ch. North, between sections 7 and 12.

Va. 16° 20' E.

36.10 Wash 20 links wide ~~leads~~ drains NE. ~~and SW~~

40.00 Set a sandstone, 13X8X7 in. 8 in deep, marked 1/4 on the west side, in mound of earth from 4 pits each 24X12X12 in. for 1/4 sec. cor.

59.15 Wash ~~leads NW and~~ drains SE.

80.00 Set a limestone 14X10X5 in. 9 in deep, marked 5 notches on ~~the~~ south and 1 notch on the north, in mound of earth from 4 pits each 24X12X12 in. for corner to sections 1. 6. 7 and 12.

Rolling and partly level valley land. Soil 1st rate. No timber.

West boundary T. 18 S. R 12 W.

Chs. North between sections
1 and 6.
Va. 16° 20' E.

40.00. Set a limestone 18X8X6 in. 6 in. deep marked 1/4 on the west side, in mound of earth, from 4 pits each 24X12X12 in. for 1/4 sec. cor.

80.00 Set a sand stone 16X10X8 in. 10 in. deep in mound of stone and earth, with 4 pits, each 24X12X12 in. marked 6 notches on the south, north, east and west edges, for corner to townships 17 and 18 S. Ranges 12 and 13 W.

Rolling Valley land covered with white sage and grass. Soil 2nd rate
No timber.—

BOOK-A-169

North boundary T. 18 S. R. 12 W.

Chs. From corner to townships 17 and 18 S. ranges 12 and 13 W. I run East on a random line between said townships and set temporary half mile and miles stones at each 40 and 80 chs. and at 5 miles. 78 chs. and 60 links, to a point 75 links North from corner to townships 17 and 18 S. between ranges 11 and 12 West, on the 2nd Guide Meridian West, from which corner I run

N. 89° 54' W on a true line between sections 1 and 36.

Va. 16° 20' E.

40.00 Set a lime stone 13 X 8 X 6 in. 8 in. deep, marked 1/4 on the north side, in mound of earth, from 4 pits each 24 X 12 X 12 in. for 1/4 sec. cor.

North Boundary T. 18 S. R. 12 W.

Chs.

80.00 Set a lime stone 14 X 8 X 5 in. 9 in. deep, marked 1 notch on the east and 5 notches on the west edge in mound of earth, from 4 pits each 24 X 12 X 12 in. from to sections 1. 2. 35 and 36.

Valley level land, covered with white sage shadscale and grass. Soil 1st rate.

No timber —

BOOK-A-169

North Boundary T. 18 S. R. 12 W.

Chs. N. 89° 54' W. on a true line between sections 2 and 35

Va. 16° 20' E.

40.00 Set a lime stone 12 X 6 X 8 in. 8 in. deep, marked 1/4 on the north side, in mound of earth, with 4 pits each 24 X 12 X 12 in for 1/4 sec. cor.

80.00 Set a lime stone 13 X 8 X 5 in. 8 in. deep, marked 2 notches on the east and 4 notches on the west edges, with 4 pits each 24 X 12 X 12 in. in mound of earth, for cor. to sections 2. 3. 34 and 35

Level land. Soil 1st rate No timber. —

North boundary T. 18 S. R. 12 W

Chs. N. 89° 54' W on a true line between sections 3 and 34.

Va. 16° 20' E.

19.75 Wash 30 links wide ~~[illegible]~~ ~~and~~ drains S E.

40.00 Set a limestone 14 X 8 X 8 in. 9 in. deep, marked 1/4 on the north side, in mound of earth, from 4 pits each 24 X 12 X 12 in. for 1/4 sec. cor.

80.00 Set a limestone 17 X 7 X 5 in. 11 in. deep, marked 3 notches on the east and west edges, in mound of earth, from 4 pits each 24 X 12 X 12 in. for corner to sections 3. 4. 33 and 34.

Level land. Soil 1st rate, No timber.

North boundary T. 18 S. R 12 W.

Chs. N. 89° 54' W on a true line, between sections 4 and 33.

Va. 16° 20' E.

40.00 Set a sand stone 13 X 7 X 7 in. 8 in. deep, marked 1/4 on the north side, in mound of earth from 4 pits, each 24 X 12 X 12 in. for 1/4 sec. cor.

58.70 Wash 25 links wide ~~bears~~ ~~NW and~~ drains SE.

80.00 Set a grey sand stone, 15 X 8 X 5 in. 10 in. deep, marked 4 notches on the east and 2 on the west edges, in mound of earth, from 4 pits each 24 X 12 X 12 in. for corner to sections 4. 5. 32 and 33.

Valley land. Soil 2nd rate with grass. No timber.

North Boundary T. 18 S. R. 12

Chs. N 89° 54' W on a true line between sections 5 and 32.

Va. 16° 20' E.

15.40 Small wash ~~[illegible]~~ drains S.

31.30 Wash 30 links wide ~~[illegible]~~ drains ~~[illegible]~~ S.E.

40.00 Set a lime stone 12 X 8 X 6 in. 8 in. deep, marked 1/4 on the north side, in mound of earth from 4 pits, each 24 X 12 X 12 in. for 1/4 sec. cor.

80.00 Set a lime stone 13 X 10 X 5 in. 8 in. deep, marked 5 notches on the east and 1 notch on the west edges, for corner to sections 5. 6. 31 and 32. in mound of earth from 4 pits each 24 X 12 X 12 in.

Rolling and partly level land. Soil 2nd rate

No timber.

North Boundary T. 18 S. R. 12 W.

Obs. N. 89° 54' W. on a true line, between sections 6 and 31.
Va. 16° 20' E.

40.00 Set a lime stone 18 x 10 x 5 in. 8 in deep, marked 1/4 on the north side, in mound of earth. From 4 pits each 24 x 12 x 12 in. for 1/4 sec. cor.

56.50 Wash 25 links ~~[illegible]~~ drains S.E.

78.60 The corner to townships 17 and 18 S. between Ranges 12 and 13. West.

Rolling valley land
Soil 2nd rate. No timber.
June 29th 1880

BOOK-A-169

BOOK-A-1

General: description.

The quality of land in this township consist of partly rolling of 2nd rate quality and partly level with 1st rate soil. — with bunch grass, white sage, shadscale and greasewood vegetation.

Whole township is in the valley North of Sevier Lake and East of Antelope Mountains.

Much of the soil can be adapted for cultivation, balance for grazing purposes.

Joseph Gorlinski
deputy surveyor.

Copied

BOOK-A-169

237

U. S. SURVEYOR GENERAL'S OFFICE,

Salt Lake City, Utah, Aug 14 *1880*

The foregoing field notes of the survey of the West and North Boundaries of

Township No 18 S *Range No* 12 W.

of the Salt Lake Meridian, Utah Territory,

Executed by Joseph Gorlinski

Under his *contract No* 93

of the 3 *day of* June *1879*

in the month of June *1880,*

having been critically examined, the necessary corrections and explanations made, the said field notes, and the surveys they describe are hereby approved.

Fred. Salomon.

U. S. Surveyor General for Utah.

Copied Book 169 No. 13.

R: 1881 BOOK-A-169 238

Filed July 21st 1880.

Examined by T. C. Bailey

Compared by T. C. Bailey

FIELD NOTES

OF

THE SURVEY OF THE

East and North Boundaries

of Township No. 18 S., Range No. 11 W.

of the Salt Lake Meridian in Utah Territory.

BY

Joseph Gorlinski

U. S. DEPUTY SURVEYOR,

Under his Contract No. 93.

dated June 3rd 1879.

Survey commenced June 30th 1880

Survey completed June 30th 1880.

BOOK-A-169

East Boundary T. 18 S. R. 11 West

Chs. From the established corner to Townships 18 and 19 South, Ranges 10 and 11 West.

I run:

North on a true line bet. Secs. 31 and 36

Var. 16° 20' E.

40.00 Set a sandstone 13 × 8 × 5 in. 8 in. deep, marked 1/4 on N. side, in mound of earth from 4 pits each 24 × 12 × 12 in. for 1/4 Sec. corner,

80.00 Set a Grey sandstone 15 × 7 × 6 in. 10 in. deep, marked 1 notch on S and 5 on the N. edge, in mound of earth from 4 pits each 24 × 12 × 12 in. for corner to Secs. 25. 36. 30 and 31

Rolling land; soil 2nd rate; No timber.

East Boundary T. 18 S. R. 11 W.

Chs.	
	North on a true line between Secs. 25 and 30 Var. 16° 20' E.
33.25	Dry bed 25 links wide ~~bears N.W.~~ ~~and~~ drains S.E.
40.00	Set a limestone 14×7×4 in. 9 in. deep, marked 1/4 on the W. side in mound of earth, from 4 pits each 24×12×12 in. for 1/4 Section corner.
72.50	Ravine bears N.E. and heads S.W. and foot of mountainous ridge
80.00	Set a limestone 16×7×7 in. 10 in. deep, marked 2 notches on E. and 4 on N. edges, in mound of earth from 4 pits each 24×12×12 in. for corner to Secs. 24. 25. 19 and 30.
South 1/2	Rolling land; Soil 2nd rate; No timber; Mountainous land on 7.50 chs 3rd rate.

BOOK-A-169

East Boundary T. 18 S. R. 11 W.

Chs. North on a true line bet. Sect. 19 and 24

Var. 16° 20' E.

24.00 Hollow ~~bear~~ drains N.E. ~~and S.W.~~ 3.00 chs. wide.

40.00 Set a limestone 14 × 10 × 4 in. 9 in. deep, marked 1/4 on W. side in mound of earth from 4 pits each 24 × 12 × 12 in. for 1/4 Sec. cor.

58.00 Top of ridge bears N.E. & S.W.

80.00 Set a limestone 13 × 8 × 5 in. 8 in. deep, marked 3 notches on N. and S. edges in mound of earth from 4 pits each 24 × 12 × 12 in. for corner to Sections 13. 24. 18 and 19 Mountainous on 80 Chains

Rolling and ridge land covered with grass and white sage; Soil 2nd rate; No timber.

East Boundary T. 18 S. R. 11 W.

Chs.	
	North on a true line between sections 13 and 18
	Var. 16° 20' E
24.25	Gully ~~bear~~ drains N.E. ~~& S.W.~~
38.20	" " " " "
40.00	Set limestone 12 × 8 × 7 in. 8 in. deep, marked 1/4 on W. side in mound of earth from 4 pits each 24 × 12 × 12 in. for 1/4 Sec. cor.
54.00	Enter valley land bears N.W. and S.E. and leave mountainous ridge
80.00	Set a sandstone 18 × 10 × 5 in. 12 in. deep, marked 4 notches on S. and 2 on N. edges in mound of earth from 4 pits each 24 × 12 × 12 in. for corner to Secs. 12, 13, 7 and 18.

Rolling valley land; Soil 2nd rate on 54 chs.
Mountainous ridge land; Soil 3rd rate; No timber.

East Boundary T. 18 S. R. 11 W.

Chs. North on true line

bet. sect. 7 and 12

Var. 16° 20' E.

40.00 Set a cobble stone 13 x 8 x 6 in. 8 in. deep marked 1/4 on the W. side in mound of earth from 4 pits each 24 x 12 x 12 in. for 1/4 Sec. cor.

80.00 Set a sand stone 14 x 8 x 5 in. 10 in. deep, marked 5 notches on S. and 1 on N. edges in mound of earth with 4 pits each 24 x 12 x 12 in. for cor. to secs. 1. 12. 6 and 7

Valley and rolling land, with sage and shadscale undergrowth

Soil 2nd rate; No timber;

244

East Boundary T. 18. S. R. 11 W.

Chs. North on a true line
bet. secs. 1 and 6

Var. 16° 20' E.

28.50 Wash ~~beam~~ ~~N.W.~~ ~~and~~ drains S. E.

40.00 Set a sand stone 14×10×6 in. 9 in. deep, marked 1/4 on W. side in mound of earth with 4 pits each 24×12×12 in. for 1/4 section corner.

80.00 Set a sand stone 15×7×7 in. 10 in. deep, marked 6 notches on the N. S. E. and W. edges in mound of earth and stone with 4 pits each 24×12×12 in. for corner to Townships 17 and 18 S. Ranges 10 and 11 W.

Rolling land; Soil 2nd rate; No timber;

North Boundary T. 18 S. R. 11 W.

Chs From the established corner to Townships 17 and 18 S. Ranges 11 and 12 W. on the 2nd Guide Meridian West, I run, with Var. at 16° 20' E:

East on a random line between said Townships.

I set temporary stones at each half and mile corners at every 40 and 80 chains and at 5 miles 78 chains and 36 links to a point 96 links South from corner to Townships 17 and 18 S. Ranges 10 and 11 West; from which corner I run:

S. 89° 53' W. on a true line bet. secs. 1 and 36

Var. 16° 20' E.

40.00 Set a sand stone 12 × 8 × 6 in.

North boundary T. 18 S. R. 11 W.

Chs.	
	8 in. deep marked 1/4 on the N. side in mound of earth with 4 pits each 24 x 12 x 12 in. for 1/4 section corner.
45.50	Wash ~~[illegible]~~ ~~N.W.~~ ~~[illegible]~~ azimuth, E. 6.
80.00	At a sand stone 14 x 8 x 5 in. 9 in. deep marked 1 notch on E. and 5 on W. edges, in mound of earth from 4 pits each 24 x 12 x 12 in. for corner to sections 1. 2. 35 and 36
	Rolling valley land; Soil 2nd rate; No timber.

Chs.	
15.00	
40.00	
62.00	
80.00	

North Boundary T 18 S. R. 11 W.

Chs. S. 89° 53' W. on a true line bet. Secs. 2. and 35.
Var. 16° 20' E.

15.00 Mountainous and ridge land bears N. and S.

40.00 Set a limestone 14×9×6 in. 9 in. deep, marked 1/4 on N. side in mound of earth from 4 pits each 24×12×12 in. for 1/4 Sec. corner.

62.00 Gully ~~bears N. W. and~~ drains S. E.

80.00 Set a limestone 14×8×8 in. 9 in. deep, marked 2 notches on the East and 4 on the W. edges in mound of earth from 4 pits each 24×12×12 in. for corner to Sections 2, 3, 34 and 35

Rolling and mountainous ridge land on 65.00 chains Soil 2nd and 3rd rate; No timber.

North Boundary T. 18 S. R. 11 W.

Chs. S. 89° 53' W. on true line bet. Secs. 3 and 34

Var. 16° 20' E.

22.00 Leave mountainous rolling ridge and enter level valley bearing Northerly and Southerly.

40.00 Set a limestone 13×8×5 in. 8 in. deep, marked 1/4 on N. side in mound of earth from 4 pits each 24×12×12 in. for 1/4 Sec. cor.

80.00 Set a limestone 12×8×6 in. 8 in. deep, marked 3 notches on the E. and W. edges, in mound of earth from 4 pits each 24×12×12 in. for cor. to Secs. 3. 4. 33 and 34. East part mountainous ridge land; Soil 3rd rate. West part valley, Soil 2nd rate, No timber

BOOK-A-169

North Boundary T. 18 S. R 11 W.

Chs. S. 89° 53' W. on true line bet. Secs. 4 and 33

Var. 16° 20' E.

28.50 Hack 20 links wide ~~[illegible]~~ ~~[illegible]~~ ~~[illegible]~~ drain S. E.

40.00 Set sandstone 13 x 8 x 5 in. 8 in. deep, marked 1/4 on N. side in mound of earth from 4 pits each 24 x 12 x 12 in. for 1/4 Sec. cor.

80.00 Set a sandstone 14 x 4 x 6 in. 9 in. deep marked 4 notched on the East and 2 on the W. edge in mound of earth from 4 pits each 24 x 12 x 12 in. for cor. to Secs. 4. 5. 32 and 33

Valley level land; Soil 1st rate; No timber.

North Boundary T. 18 S. R. 11 W.

Chs. S. 89° 53' W. on true line bet. secs. 5 and 32

Var. 16° 20' E.

40,00 Set a limestone 13 × 8 × 5 in. 8 in. deep, marked 1/4 on N. side in mound of earth from 4 pits each 24 × 12 × 12 in. for 1/4 sec. cor.

80,00 Set a limestone 14 × 7 × 7 in. 9 in. deep, marked 5 notches on the E. and 1 on the W. edge in mound of earth from 4 pits each 24 × 12 × 12 in. for corner to secs. 5. 6. 31 and 32.

Level land; soil 1st rate; No timber.

BOOK

North

Chs.

40,00

78.36

BOOK-A-169

North Boundary T. 18 S. R. 11 W.

Chs. S. 89° 53' W. on true line bet. Secs 6 and 31

Var. 16° 20' E.

40.00 Set a sand stone 14 x 8 x 5 in. 9 in. deep, marked 1/4 on the N. side in mound of earth from 4 pits each 24 x 12 x 12 in. for 1/4 Sec. cor.

78.36 The corner to Townships 17 and 18 S. Ranges 11 and 12 W. on the 2nd Guide Meridian West previously established.

Level valley land; Soil 1st rate. No timber.

June 30th 1880

General Description

The quality of land in this Township is generally 2nd rate with fair proportion of good level bottom soil.

Portion of lands on the East is covered by rolling ridge and mountainous.

No timber or mineral.

Joseph Gorlinski
U.S deputy Surveyor.

BOOK-A-169

LIST OF NAMES.

A list of the names of the individuals employed to assist in running, measuring or marking the lines and corners described in the foregoing Field Notes of the 3rd and 4th Standard Parallels South, the 2nd Guide Meridian West between the 2nd and 5th Standard Parallels South, the Exterior lines of Tps. 18 and 19 South, Ranges 11 and 12 West. Offset lines and the Exterior and Subdivisions in Tps. 22 and 25 South Range 11 West of Salt Lake Meridian.

showing the respective capacities in which they acted.

Frank Gorlinski	*Chainman.*
Robert Gorlinski	*Chainman.*
Theodore Sime	*Flagman.*
Joseph Turner	*Axeman.*

BOOK-A-169

We hereby certify that we have assisted

Joseph Gorlinski

U. S. Deputy Surveyor in surveying the 3d and 4th Standard Parallel South, the 2nd Guide Meridian West between the 2nd and 5th Standard Parallel South, the Exterior lines of Tps 18 and 19 S. Ranges 11 and 12 West, offset lines, and the exterior and subdivisions in the Townships 22 and 23 South Range 11 West of Salt Lake Meridian. —

BOOK

and that said surveys have been in all respects, to the best of our knowledge and belief, well and faithfully surveyed, and the boundary monuments planted according to the instructions furnished by the Surveyor General.

Frank Gorlinski Chainman.
Robert Gorlinski Chainman.
Theodore Sims Flagman.
Joseph Turner Axeman.

Subscribed and sworn to by the above named persons, before me, a Notary Public in and for the County of Salt Lake, in the Territory of Utah, this 13th day of July 1880.

Geo. A. Bailey
Notary Public.

I, Joseph Gorlinski U. S. Deputy Surveyor, do solemnly swear that in pursuance of a contract with F. M. Salomon Surveyor General of the public lands of the United States in the Territory of Utah, bearing date the 3rd day of June 1879, and in strict conformity to the laws of the United States, the Manual of Surveying Instructions, and the instructions furnished by the said Surveyor General, I have faithfully surveyed the 3rd and 4th Standard Parallels South, the 2nd Guide Meridian West between the 2nd and 5th Standard Parallels South, the Exterior lines of Tps. 18 and 19 South, Ranges 11 and 12 West. Offset lines and the Exterior and Subdivisions of Tps. 22 and 25 South Range 11 West of Salt

5058

Lake Meridian

In the Territory aforesaid, and do furth
solemnly swear that the foregoing are the tr
and original Field Notes of such survey.

Joseph Gorlinski
U. S. Deputy Surveyor.

Subscribed by the said Joseph Gorlinski U. S. Deputy Survey
and sworn to before me, a Notary Public in and for t
county of Salt Lake in the Territ
of Utah, this 20th day of July 18

Jno A. Bailey
Notary Public

BOOK-A-169

U. S. SURVEYOR GENERAL'S OFFICE,

Salt Lake City, Utah, Aug 14 *1880*

The foregoing field notes of the survey of the East and North boundaries of

Township No 18 S. *Range No* 11 W.

of the Salt Lake Meridian, Utah Territory,

Executed by Joseph Gorlinski

Under his *contract No* 93

of the 3 *day of* June *1874,*

in the month of June *1880,*

having been critically examined, the necessary corrections and explanations made, the said field notes, and the surveys they describe are hereby approved.

Geo. Salomon

U. S. Surveyor General for Utah.