BOOK-A-186 4
186 R: 1882 454 1

Filed 187 .

Examined by John H. Lamph & A. Gorbinski

Compared by A. Gorbinski & F. Linton

FIELD NOTES

OF and Resurvey

THE SURVEY OF THE

Exteriors

3 of Township No. 2 N., Range No. 13 E.

of the Salt Lake Meridian in Utah Territory.

BY

W. L. Perrow

U. S. DEPUTY SURVEYOR,

Under his Contract No. 105 dated July 29 th " 1881.

Survey commenced Aug. 16 th " 1881

Survey completed Aug. 18 th " 1881

186-1

BOOK-A-186 4
186 R: 1882 454 1

Filed 187 .

Examined by John H. Lamph & A. Gorbinski

Compared by A. Gorbinski & F. Linton

FIELD NOTES

OF and Resurvey

THE SURVEY OF THE

Exteriors

3 of Township No. 2 N., Range No. 13 E.

of the Salt Lake Meridian in Utah Territory.

BY

W. L. Perrow

U. S. DEPUTY SURVEYOR,

Under his Contract No. 105 dated July 29 th " 1881.

Survey commenced Aug. 16 th " 1881

Survey completed Aug. 18 th " 1881

186-1

BOOK-A-186

Township 2 N. R. 13 East

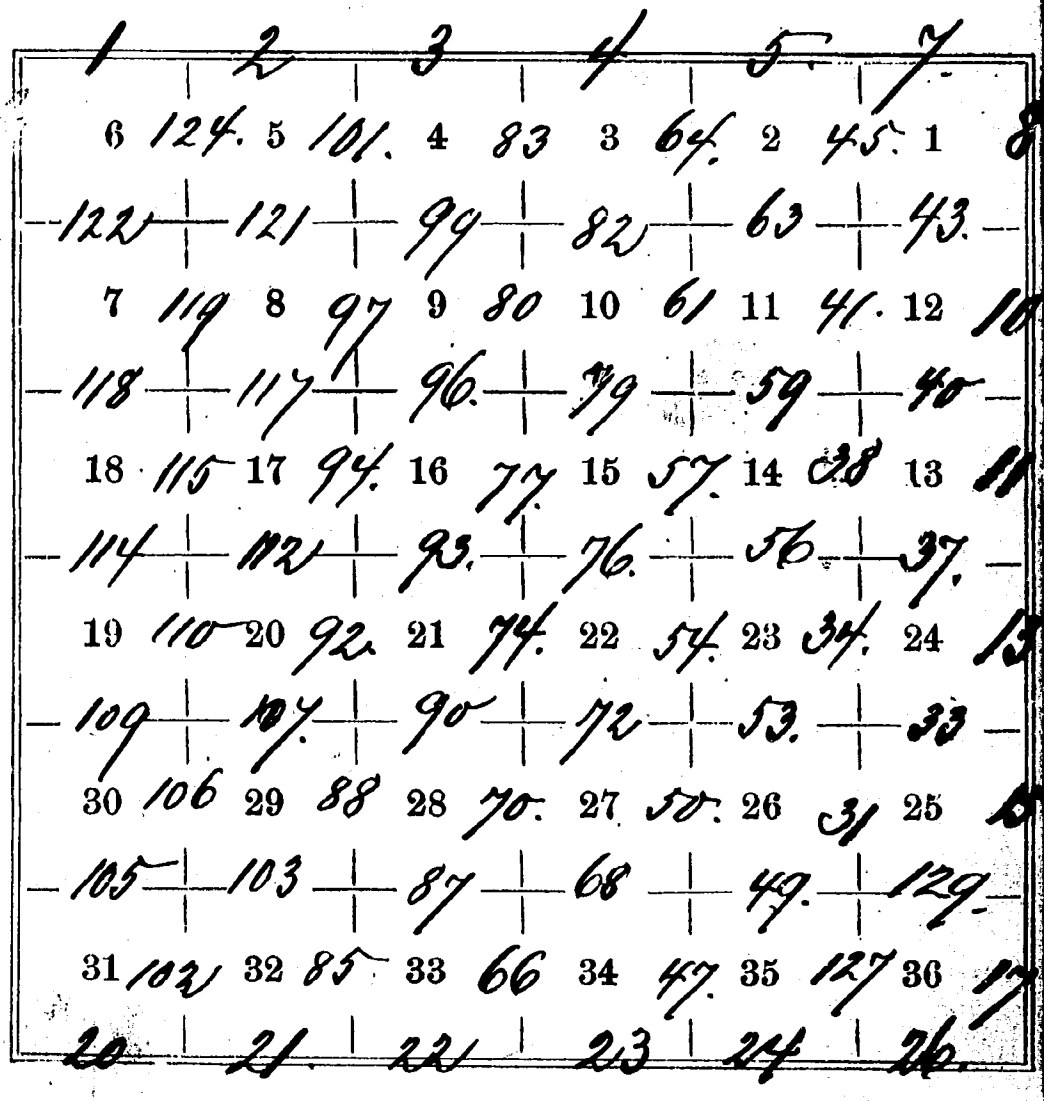

BOOK-A-186 ~~45~~ / B

Resurvey of the Exterior T. 2 N. R. 13 E.

Chs. Survey commenced August 16th 1881, With Young's Solar Transit #4901, From the established cor. to Tps. 2 and 3 N. R. 12 and 13 E. being a boulder 14 x 8 x 8 ins. firmly in the ground and 4 bearing trees, all properly marked & mkd. 6 notches on W. E. & W. edges. I run East on a true line bet. Secs. 6 and 31.

Va. 16° 35' E.

38.74 The 1/4 Sec. cor. being a red pine 4 ins. diam., mkd. 1/4 on N face, 2 bearing trees standing.

78.74 The cor to Secs. 5. 6. 31 & 32, being a red pine, mkd 5 notches on E. and 1 notch on W. edges. 3 bearing trees

Riverway of the Exterior I.

BOOK-A-1

Chs.	Standing.	Chs.	2 N
	Land, plateau.		
	Soil, 1st rate.		
	Timber, pine & fir.		
	Cast on a true line bet. Secs. 5 & 32		
	Va. 16° 35' E.		
11.25	Creek 10 lks. wide, 3 ins. deep, in bottom, runs N. E.		
26.50	A red pine 22 ins. diam.	2.90	
40.00	Pine 4 Sec. cor. being a red pine 8 ins. diam, mkd 1/4 on N. face, 2 bearing trees standing	8.50	
56.50	Pine 35 ins. diam.	14.25	
74.25	" 40 " "	14.75	
80.00	The cor. to Secs. 4, 5, 32 & 33, being a double pine 12 ins. diam. mkd 4 notches on	18.80	
		40.00	

BOOK-A-186

2 N. R. 13 E. S. L. M.

Chs.	E. and 2 notches on W. sides with stone mound alongside 3 bearing trees standing.
	Land, plateau.
	Soil, 1st rate.
	Timber, pine.
	E. cor on a true line bet. Secs. 4 & 33.
	Va. 16° 35' E.
2.90	Road bears N. & S.
8.50	Spring branch 2 lks. wide 4 ins. deep, runs S. E.
14.25	Smith's Fork, 12 lks. wide 6 ins. deep, runs N
14.75	Spring branch 6 lks. wide 3 ins. deep, runs N
18.80	Spring branch, 3 lks. wide 4 ins. deep, runs W.
40.00	The 1/4 Sec. cor. being a quartzite

Reserve of the Exterior P. 1

Chs.		Chs.	
	13 × 1 × 6 mks. 11 min. in the ground, mkd. 14 on N. Jaw, with Stone mound along side, 2 bearing trees Standing	40.00	
7 3.75	Spring pond.	80.00	
7 5.50	Scrub Sand.		
80.00	Thence to Cor. to Secs. 3, 4, 33 & 34, being a quartzite 3 in × 13 × 8 ins. firmly in the ground mkd. 3 pt. 4 on E. & W. edges with Stone mound along side, 3 bearing trees Standing. Land, rolling. Soil, 2nd rate, rocky. Timber, pine.		
	East on a true line bet. Secs. 3 & 34 Va. 16° 35' E.		
7 3.90	Spring pond, runs N	2.15	

BOOK-A-186

2 N. R. 13 E. S. L. M.

Chs.

40.00 The "U Sec. cor. being a quartzite 18 x 13 x 8 ins. firmly in the ground, mkd "U on N. face 2 bearing trees standing.

80.00 The cor. to Sec. 2, 3, 34 and 35, being a quartzite 3 ft x 12 x 6 ins. firmly in the ground, mkd 2 notches on E. and 4 notches on W. edge with stone mound alongside 3 bearing trees burnt.

Land, rolling.
Soil, 1st rate.
Timber, pine, burnt.

East on a true line bet. Sec. 2 and 35.

Va. 16.35 E.

2.13 Dry Wash drains N.

Resurvey of the Exterior

Chs.		Chs.
4.00	Enter meadow.	
13.60	Creek 2 lks. wide 4 lnks. deep runs N.	
30.20	" 6 " " 4 " " " N.	11.15
31.00	" 3 " " 2 " " " N.	14.50
39.00	"leavy" meadow,	
40.00	Pile ¼ sec. cor. being a quartz	17.35
	12 × 8 × 6 ins. firmly in the	26.00
	ground mkd. ¼ on N. face,	31.00
	with stone mound alongside	40.00
80.00	Pile cor. to secs. 1, 2, 35 & 36	
	being a quartzite 20 × 12 × 8 ins.	
	firmly in the ground, mkd	
	1 notch on E. and 5 notches	
	on W. edges, stone mound	44.00
	alongside	57.00
	Land, rolling.	67.00
	Soil, 2nd rate.	68.50
	Timber, burnt pine.	
		77.20

BOOK-A-186 #47

T. 2 N. R. 13 E. S.L.M.

Chs. East on a true line, bet. Secs. 1 & 36

Va. 16° 35' E.

11.15 Pond 1.10 chs. wide.

14.50 Road bears N.E. & S.W.

17.35 " " N. & S.

26.00 Pond, 1.75 chs. wide.

31.00 Pond 2.50 " "

40.00 The 1/4 Sec. cor. being a quartzite 12×10×5 ins. firmly in the ground, mkd. 1/4 on N face, 2 bearing trees Standing.

44.00 Pond 2.00 chs. diam.

57.00 " " " "

67.00 " " " "

68.50 Spring branch 5 lks. wide 4 ins. deep, runs S.E.

77.20 Spring branch 5 lks. wide 4 ins. deep, runs N.W.

Resurvey of Exteriors T. 2 N. R. 13 E.

Chs.		Chs.
80.00	The cor. to Tps. 2 & 3 N. R^s 13 & 14 E. being a granite 24×12×4 ins. firmly in the ground, mkd. 6 miles on N, S, E, & W. edges	80.00
	3 bearing trees standing.	
	Land, rolling.	
	Soil 1st rate.	
	Timber, red pine.	
	August 16th 1881	
	East boundary T. 2 N R 13 E.	
	From the cor. to Tps. 2 & 3 N. R^s 13 & 14 E. just described	
	I run	
	South bet. Secs 1 & 6	
	Va 16° 35' E.	
40.00	Dry large patch of willows.	
	Set quartz rock 12×8×6 ins.	

BOOK-A-186

Exteriors T. 27 N. R. 13 E. S. L. M.

Chs.	
	8 ins. in the ground, for 1/4 Sec. cor. mkd. 1/4 on W. face, and raised a mound of stone alongside.
80.00	Set a quartzite 17 x 8 x 6 ins. 11 ins. in the ground, for cor. to Sec. 1, 6, 7 and 12, mkd. 1 notch on N & 5 notches on the S. edges, and raised a mound of stone alongside, from which, A pine, 15 ins. diam., bears S. 80° W. 30 lks. dist. mkd. T. 27 N. R. 13 E. S. 12 B. T. A pine 11 ins. diam, bears N. 88° W. 14 lks. dist. marked T 27 N. R. 13 E. S. 1 B. T. A pine, 5 ins. diam, bears S. 60° E. 12 lks. dist. marked T. 27 N. R. 14 E. S. 7 B. T.

BOOK-A-

Exterior ~~of~~ T. 2 N. R. 1

Sec.	Land, rolling. Soil, 2nd rate. Timber, pine, partly burnt on 80.00 chains.	dist.
	South bet. Sec. 7 & 12 Va. 16' 35' E.	
33.50	Spring branch 5 lks. wide 6 ins. deep, runs N. E.	
40.00	Set a quartzite 11 x 10 x 9 ins. 6 ins in the ground, for 1/4 Sec. cor. mkd. 1/4 on W. face. Four witness. Pine, 5 ins. diam, bears S. 80° E. 2 lks. dist. mkd 1/4 S. B. T. Pine 6 ins. diam. bears N. 50° E. 11 lks. dist. mkd. 1/4 S. B. T.	
80.00	Set a quartz rock 16 x 10 x 6 ins. 11 ins in the ground	

BOOK-A-186

R. 13 E. ~~S.~~ 11 S. L. M.

Dist. for cor. to Sec 7, 12, 13 & 18, mkd 2 notches on N. and W notches on S. edges, and raised a mound of stone alongside, from which a pine, 12 ins. diam. bears N 5° E. 11 lks. dist. marked T. 2 N. R. 14 E. S. 7. B. T. A pine, 7 ins. diam, bears S. 68° E. 6 lks. dist. mkd. T. 2 N. R. 14 E. S. 18 B. T. A pine 10 ins. diam. bears S. 18° W. 8 lks. dist. mkd. T. 2 N. R. 13 E. S. 13 B. T.

Land, rolling.
Soil, 2nd rate.
Timber, pine, partly burned on 80 acs. chains.

South bet. Sec. 13 & 18

BOOK-A-

Exterior 12 T. 2 N. R.

Chs		Chs.
	Va. 16° 35' E.	
36,00	Hollow drains N. E.	
	Spring branch, 2 lks. wide	
	6 ins. deep, runs N. E.	
40,00	Set quartzite 10×10×6 ins.	
	6 ins. in the ground for	
	1/4 Sec. cor. mkd 1/4 on W.	
	face and raised a mound	
	of stone alongside.	
76,25	Lake forks 50 lks. wide	
	18 ins. deep, runs N. E.	
80,00	Set a quartz rock 18×10×4	
	ins. 12 ins. in the ground	
	for cor. to Sec. 13. 18. 19.	
	& 24 mkd. 3 notches on	10,00
	the N. & E. edges and	20,00
	raised a mound of stone	30,00
	alongside. From which	40,00
	A pine, 10 ins. diam, bears	
	S. 5° W. 15 lks. dist. mkd.	

BOOK-A-186

R. 13 E. ~~14~~ 13 L. M.

	Sec.
	T. 2 N. R. 13 E. S. 24. B.T.
	A pine, 11 ins. diam, bears
	N. 1° E. 26 lks. dist. mkd
	T. 2 N. R. 14 E. S. 18 B.T.
	A pine 10 ins. diam. bears
	N. 70° E. 24 lks. dist. mkd
	T. 2 N. R. 14 E. S. 18 B.T.
	Land, rolling.
	Soil, 3rd rate.
	Timber, pine, partly burnt
	on 80.00 chains.
	South bet. Sec. 19 & 24
	Va. 16° 35' E.
10.00	Enter park.
20.00	Beaver dams.
30.00	Leave park.
40.00	Set a quartzite 20×15×10 ins.
	15 ins. in the ground, for
	1/4 Sec. cor. mkd. 1/4 on W.

BOOK-A-

Exteriors T. 2 N. R. 1

Dist.	Saw and raised a mound of stone alongside, from which,	Ft.
	A pine, 14 ins. diam. bears N. 30° E. 32 lks. dist. mkd. 1/4 S. B. T.	
	other trees burnt.	
80.00	Set a quartz rock 16 x 10 x 8 ins. 11 ins. in the ground, for cor. to Sec. 19, 24, 25, & 30 mkd 4 notches on N. edges, and 2 notches on E. edges, and raised a mound of stone alongside. from which	8.00
	A pine, 7 ins. diam. bears N. 10° W. 13 lks. dist. mkd T. 2 N. R. 13 E. S. 24 B. T.	15.50
	A pine 9 ins. diam. bears N. 61° E. 5 lks. dist. mkd. T. 2 N. R. 14 E. S. 19 B. T.	40.00

BOOK-A-186

R. 13 E. T. 2 S. M.

Sec.	other true burnt.
	Land rolling.
	Soil, 3rd rate.
	Timber, bissonet pine and
	80.00 Chains.
	South bet. Sec. 25 & 30
	Va. 16.35 E.
8.00	Enter hollow, bears S.
	and N.W.
	A Spring branch 4 lks.
	wide, 2 ins. deep, runs
	N.W.
15.50	Leave Sand, bears S.W.
40.00	Set quartzite, 30 x 20 x 20 ins.
	20 ins. in the ground, for
	1/4 Sec. cor. Pile 6 lks on
	W. face and raised a
	mound of stone along side.
	from which

Exteriors T. 2 N. R. 1 E.

Sec.	A pine 9 ins. diam. bears N. 87° W. 25 lks. dist. mkd 1/4 S. B. T.	Sec.
	A pine, 13 ins. diam. bears N 39° E. 25 lks. dist. mkd 1/4 S. B. T.	
42.50	Enter park.	
56.50	Leave same.	
80.00	Set quartzite 18 x 8 x 8 ins. 12 ins. in the ground, for cor. to Secs. 25, 30, 31 & 36. mkd 5 notches on N. and 1 notch on E. edges. and raised a mound of stone alongside. from which:	40.00
	A pine, 26 ins. diam. bears S. 88° E. 39 lks. dist. mkd. T. 2 N. R. 1 E. S. 31 B. T.	
	A pine, 10 ins. diam. bears S. 10° W. 12 lks. dist. mkd.	45.00

BOOK-A-186

R. 13 E. ~~T. 17 N.~~ T. 16 N.

Sec.	T. 2 N. R. 13 E. S. 36. B.M.
	No other trees in limit.
	Land, rolling.
	Soil, 3rd rate.
	Timber, pine and fir.
	80.00 chains.
	South bet. Sec. 31 & 36
	Va. 16° 35' E.
40.00	Set quartzite 20×18×6 ins.
	15 ins. in the ground, for
	1/4 Sec. cor. mkd. 1/4 on N.
	face, from which
	A pine, 16 ins. diam. bears
	N. 30° W. 3 lks. dist.
	mkd 1/4 S. B. T.
	A pine, 10 ins. diam. bears
	S. 10° W. 12 lks. dist. mkd
	1/4 S. B. T.
45.00	Leave timber.

BOOK-A

Exteriors T. 2 N. R. 13 E.

Chs. 80.00 Set quartzite 30×14×6 ins. 26 ins. in the ground, for cor. to Tps. 1 and 2 N. R. 13 & 14 E. — mkd. 6 — notched on N. S. E. & W. edges, and raised a mound of stone alongside.

Land, broken mountains

Soil, 3rd rate.

Timber, pine on 45.00 Chs. 80.00 Chs. over mountains, brush

August 17th 1881

From the cor. to Tps. 1 and 2 N. R. 13 & 14 E. just described I run W. on a random line bet. said Tps., the variation of my compass being 16° 35' E.

Chs. 70.00 25.13 [illegible] Station [illegible] Township

BOOK-A-186

R. 13 E. S. L. M.

Chs. I set temporary 1/2 mile and mile cors. every 40 and 80 chains and find the Trop. line to be 5 miles 79.37 chains and the falling to be 46 links N. of the Witness cor to Pt. 1 and 2 N. R. 12 and 13 E. the correction for the true line will therefore be 7 2/3 links S. per mile and the course will be N. 89° 57' E.

From Witness cor. to Pt. 1 and 2 N. R. 12 & 13 E. being 26.87 chs. E. of true cor. point and which is a blazed white pine 10 ins. diam., mks 6 notches on N. & W. sides

No. 25 13 26 from Sec. Bk. Twp. 13 E.

Exterior T. 2 N. R.

Chs.		Chs.
	Gds W. C. and with Stone mound along side I run N. 89° 47' E on a true line bet. Sec. 6 & 31	40.00
	Va. 16° 35' E.	
39.37	Set a quartzite 16 x 16 x 4 ins. 11 ins. in the ground for 1/4 Sec. cor. mkd 6 1/4 on N. face and raised a mound of Stone alongside	80.00
79.37	Set quartzite 19 x 8 x 5 ins. 12 ins. in the ground, for cor. to Secs. 5, 6, 31 & 32, mkd 5 notches on E. and 1 notch on W. edges and raised a mound of Stone alongside	
	Land, rolling table mountains	
	Soil, 2nd rate.	
	No timber.	
	79.37 chs. over mountainous land.	

BOOK-A-186 ~~4~~ 21

R. 13 E. ~~4~~ S. L. M.

Chs.	N. 89° 57' E. on a true line, bet. Secs. 5 & 32 Va. 16° 35' E.
40.00	Set a quartzite 18 x 12 x 3 ins. 12 ins. in the ground, for 1/4 Sec. cor. mkd 1/4 on N face and raised a mound of stone along side
80.00	Set quartzite 17 x 12 x 3 ins. 11 ins. in the ground, for cor. to Secs. 4, 5, 32 & 33 mkd. 4 notches on E & 2 notches on W. edges and raised a mound of stone along side.
	Land rolling Table mountains.
	Soil, 3rd rate.
	No timber.
	80.00 chs. over mountainous land

Exterior T. 2 N. R. 13 E.

		Chs.	
Chs.	N. 89° 57' E. on a true line, bet. Sec. 4 and 3		
	Va. 16° E.		
41.00	Set a quartzite 10×10×6 ins. 6 ins. in the ground, for 1/4 Sec. cor. mkd. 1/4 on N. face and raised a stone mound alongside,		
44.50	Steep descend of bluff 250 feet deep.	40.00	
54.00	Foot of same.		
80.00	Set a quartzite 13×10×4 ins. 8 ins. in the ground, for cor. to Sec. 3, 4, 33 and 34, mkd 3 notched on E. and W. edges and raised a mound of stone alongside from which a Spruce, 12 ins. diam. bears N. 39° W. 73 lks. dist. mkd T. 2 N. R. 13 E. S. 33 B.T.	49.00	

13 E. 2 L. M.

Chs.	No other trees in limit. Land, very little breaks. Soil, 3rd rate. No timber. 80.00 Chains over mts. Land.
	N. 89° 57' E. on a true line, bet. Sect. 3 & 34 Va. 16° 35' E.
40.00	Set cobble stone 10×10×8 ins. 6 ins. in the ground, for 1/4 Sec. cor. mkd 1/4 on N. face from which A pine 18 ins. diam, bears S. 50° E. 11 lks. dist. mkd. 1/4 S. B. T. A pine, 18 ins. diam, bears N. 47° E. 11 lks. dist. mkd. 1/4 S. B. T.
49.00	Lake fork 3 chs. wide

Exterior S. 2 W. R. 1

Dis.		Dis.
	15 ins. deep, runs N. 6	
74.50	branch 10 lks. wide, 6 ins.	40.00
	deep, runs N	
80.00	Set quartzite 10 × 10 × 8 ins.	
	6 ins in the ground. for	
	cor. to Sec 2, 3, 34 & 35	
	mkd 3 notches on E. and	
	4 notches on W. edges	56.50
	and raised a mound	80.00
	of stone alongside.	
	Land, rolling & broken.	
	Soil, 3rd rate.	
	Timber, burnt pine on	
	80.00 chains.	
	N. 89° 57' E. on a true	
	line, bet. Sec. 2 & 35	
	Va. 16° 35' E.	
33.00	Leave timber, & mud flats	
	rocky slide.	

BOOK A-186 ~~24~~ 25

R. 13 E. S. L. M.

Lks.	
40.00	Mark Stationary quartz rock 14 × 11 × 10 ins. above ground, for 1/4 Sec. cor. mkd 1/4 on N. face, and raised a mound of stone alongside.
56.50	Ridge bears N.E. & S.W.
80.00	Set quartzite 30 × 9 × 9 ins. 20 ins. in the ground, for cor. to Sec. 1, 2, 35, and 36, mkd. 1 notch on E. and 5 notches on W. sides and raised a mound of stone alongside. From which
	A pine, 8 ins. diam., bears S. 50° W. 20 lks. dist. mkd T. 17 N. R. 13 E. S. 2. B. T.
	A pine, 10 ins. diam., bears

Exterior ~~T. 26 N.~~ T. 27 N. R. 1

Chs.	N. 5° W. 31 lks. dist. mon. T. 27 N. R. 13 E. S. 35 B.P.	Chs.
	Land, broken mountains.	
	Soil, 3rd rate.	
	Timber, scattering pine.	
80.00	80 chs. over mountainous land.	80.00
	N. 89° 57' E. on a true line, bet. Secs. 1 and 36.	
	Va. 18° 35' E.	
5.00	Enters Canon flat.	
19.50	Spring branch 5 lks. wide 6 ins. deep, runs N.E. 5 chs.	
	thence N.W.	
22.00	Ascends.	
44.00	Mark Stationary quartz rock, 18 x 14 x 6 ins. above ground, for 1/4 Sec. cor. nks. 1/4 ons N. face. and raised a mound of stone along side

R. 13 E. S.L. Mo.

Chs.	
	From which A balsam 6 ins. diam. bears S. 86° W. 33 lks. dist. — mks. W S.B.P. No other tree in limit.
80.00	The cor. to Tps. 1 & 2 N. Rs. 13 & 14 E. previously dy cribed at beginning of said line and, very Stoney ~~mks~~ Soil, 3rd rate. Timber, Scattering dwarf pine, 80.00 chs. over mountainous land August 18th 1881

Note:

For General Description
See end of Subdivision notes
of this Tp.

A. A. Perron
U.S. Dep. Surveyor.

BOOK-A-186 25

U. S. SURVEYOR GENERAL'S OFFICE,

Salt Lake City, Utah, Jan 26th, 1882

The foregoing field notes of the survey ~~of the~~ and resurvey of the Exteriors of

Township No 2. N. *Range No* 13. E.

of the Salt Lake Meridian, Utah Territory,

Executed by A. D. Farrow

Under his *contract No* 105

of the 29th *day of* July 1881,

in the month of August 1881.,

having been critically examined, the necessary corrections and explanations made, the said field notes, and the surveys they describe are hereby approved.

Fred. Saltmarsh.

U. S. Surveyor General for Utah.

28 A

Township 2 N. R. 13 East

1		2		3		4		5		7	
6	124	5	101	4	83	3	64	2	45	1	8
122		121		99		82		63		43	
7	119	8	97	9	80	10	61	11	41	12	10
118		117		96		79		59		40	
18	115	17	94	16	77	15	57	14	38	13	11
114		112		93		76		56		37	
19	110	20	92	21	74	22	54	23	34	24	13
109		107		90		72		53		33	
30	106	29	88	28	70	27	50	26	31	25	14
105		103		87		68		49		29	
31	102	32	85	33	66	34	47	35	27	36	17
20		21		22		23		24		26	

BOOK A-186
R. 1882.

Filed 187 .

Examined by John D. Lamphere.

Compared by A. Gorlinski & T. Linstone

FIELD NOTES

OF

THE SURVEY OF THE

Subdivisions

of Township No. 2 N. , Range No. 13. E.

of the Salt Lake Meridian in Utah Territory.

BY

Augustus D. Perron

U. S. DEPUTY SURVEYOR,

Under his Contract No. 105

dated July 29th 1881

Survey commenced Sept. 7th. 1881.

Survey completed Sept. 14th 1881.

186 - 2

NAMES AND DUTIES OF ASSISTANTS:

	Compassma
P. A. Rowe.	*Chainman.*
J. Poulsen	*Chainman.*
~~Ferdinand~~ Frazer	*Chainman.*
C. Carlson	*Chainman.*
S. J. Morrow.	*Axeman.*
E. F. Osterhout.	*Flagman.*

80, 16.

40.00

BOOK-A-186

A Pine 4 in. dia brs N. 8 lks. dist.
A. Pine 12 in. dia. brs.
S. 86° W. 15 lks. dist.
Both marked 1/4 S.B.T.
80.16. The Cor. to Secs. 25. 26. 35 and 36.
Land mostly high broken Mountains
Soil 3rd rate
Timber Pine and Aspens
Mountainous ow 80.16 chs.

North bet. Secs. 25 & 26
Var. 16° 35' E.
Descend
40.00 Set Quartzite 10x10x4 6 in. in ground mark'd 1/4 ow W. Jacd and raised

a stone mound along side
for 1/4 Sec. Cor.
No trees within distance.
6.00 Foot of Ridge bears S.E & N.W.
8.00 Set Quartzite 12 x 10 x 7,
8 in. in ground Marked
2 notches on S. and 1 on
E. edges and raised a stone
mound alongside for Cor
to Secs. 23. 24. 25 & 26.
from which
A Pine 13 in. dia. bears S. 15° W.
17 lks. dist marked T.
2 N. R. 13 E. S. 26.
B. T.
A Pine 13 in. dia. bears N.
5° 2° W. 15 lks. dist
Marked T. 2 N. R. 13 E.
S. 23 B. T.
A Pine 7 in. dia. bears N.

BOOK-A-186

48°E. 26 lks. dist. marked
T. 22 N. R 13 E. S. 24 & 25
Land mostly high & rocky
Mountains.
Soil 3rd rate
Timber & scattering Pine
Mountainous on W. bs.

East and Random line
between Secs. 24 and 25
Var. 16° 35' E.

40.00 Set temporary 1/4 Sec. Cor.
45.00 Steep ascend
79.77 Intersect E. Bd. of T.
28 lks. N. of Cor. to Secs.
24 and 25. Established
by me on this survey
from which I run
N. 8° 48' W.

	on true line with same	40.00
	Variation	
	between Secs. 24 and 25	
39.88	Set Quartzite 16 x 10 x 4	
	10 in. in ground, marked 1/4 a.	
	N. Jack and raised a stone	
	mound along side for	
	1/4 Sec. Cor.	
	Trees in distance were burnt	
79.77	The Cor. to Secs. 23, 24, 25 & 26	
	Land broken	
	Soil 3rd rate	50.50
	Timber Pine mostly burnt	65.50
	Mountainous on 79.77 chs.	
		80.00

North bet. Secs 23 & 24.
Var. 16° 35' E.
33.00 Lake fork 75 lks. wide
1½ in. deep in bank
N. E.

BOOK-A-186

40.00 Set Quartz 17 x 11 x 8. - 12 in. in ground marked 1/4 on W face and raised a stone mound along side for 1/4 Sec. Cor. from which
Q. Pine 11 in. dia. brs. S. 40° E. 13 lks. dist.
Q. Pine 17 in. dia brs. N. 39° E. 22 lks. dist.
Bolt marked 1/4 S.B.T.

50.50 Hollow drains N. E.

65.50 Spring branch 2 lks. wide 6 in. deep in Hollow drains N.E.

80.00 Set Quartz 16 x 10 x 8. - 11 in. in ground marked 3 notches on S and 1 on E Edges and raised stone mound alongside for Cor. to Secs. 13. 14. 23 & 24.

from which
a Pine 6 in dia. brs. S. 10° E.
31 lks. distant Marked T.
2 N. R. 13 E. S. 24 B.T.
a Pine 8 in. dia. brs. N. 52° E.
27 lks. distant. Marked
T. 2 N. R 13 E. S. 13 B.T.
a Pine 18 in. dia. brs. N. 17° W.
35 lks. dist. marked
T. 2 N. R 13 E. S. 14 B.T.
a Pine 15 in. dia. brs. S. 10° W.
19 lks. dist. Marked T. 2 N.
R. 13 E. S. 23 B.T.
Land rolling
Soil 3rd Rate
Timber Pine partly burnt
on 80. chs.

BOOK-A-186

East on random line
bet. Secs. 13 and 24
Var. 16° 35' E.

30.00 Enter Meadow, Spring
branch 2 lks. wide 4 in.
deep runs N.E.

40.00 Set temporary 1/4 Sec. Cor.

45.00 Leave Meadow

75.00 Lake Fork 50 lks. wide
18 in deep. in hollow
runs N.E.

80.22 Intersect E. Boundary
of T. 7 at Cor. to Secs.
13 and 24 established
by me on this survey
from which I run
West on True line bet.
Secs. 13 & 24

40.11 In Meadow set Quartz
16 x 10 x 8, 11 in. in ground

marked 1/4 on N face and
raised a stone mound along
side for 1/4 Sec. Cor.
No trees in distance.

80.22 The Cor. to Secs. 13. 14. 23
and 24
Land Level Rem
Soil 3rd rate
Timber Pine, mostly burnt
on 65. 22 chs.

North between Secs 13 & 14
Var. 16° 35' E.
Ascend steep mountain
40.00 Set Quarz 10 x 10 x 8, 6 in.
in ground, marked 1/4 on
W. face, raised stone mound
along side for 1/4 Sec. Cor.
No trees in distance

89

80.00 T. Marked a Pine 10 in. in diameter. 4 notches on S and 1 on E. edges for Cor. to Secs. 11. 12. 13 & 14 from which a Pine 6 in. dia. brs. N. 20° W 8 lks. distant marked T. 2 N. R 13 E. Sec. 11 B.T. a Pine 9 in. dia. brs. S. 28° W. 12 lks. distant Marked T. 2 N. R. 13 E. S. 14 B.T. a Pine 9 in. dia. brs. S. 42° E 21 lks. distant. Marked T. 2 N. R 13 E. S. 13 B.T. Land, high Mountain Soil, 3rd rate Timber, Pine on 80 chs

East on random line
between Secs. 12 & 13
Var. 16° 35' E.

7.50 Gradual descent
37.50 Spring branch 5 lks. wide
6 in. deep runs N. E. in canon.
40.00 Set temporary 1/4 Sec. Cor.
43.00 Ridge runs N. E. and S. W.
49.50 Spring branch 2 lks. wide
2 in. deep, in canon runs N. E.
67.00 Hollow drains N. E.
80.26 Intersect E Boundary of
T. 9 S., at Cor. to Secs. 12 and 13
established by me on this
survey from which I run
West on true line with
same variation
between Secs. 12 & 13.
40.13 Set Quartz 17 x 10 x 5, 11 in. deep
marked 1/4 on N. face, raised

BOOK A 186

Stone mound alongside
for 1/4 Sec. Cor. from which
a Pine 11 in. dia. bears S. 65° E.
20 lks. distant.
a Pine 5 in. dia. bears
N. 58° E 8 lks. distant
Both marked 1/4 S. B. T.

80.26 The Cor. to Secs. 11. 12. 13 & 14
Land, brokEn
Soil, 3rd rate
Timber Pine nearly all burnt
on 80.26 chs.

North between Secs. 11 & 12
Var. 16° 35' E.

27.00 along top of Ridge bears N. & S.
40.00 Marked Stationary Quartz
2 x 12 x 6 in. above ground
1/2 on W face, and raised

Stone mound alongside for
1/4 Sec. cor. from which
a Pine 12 in. dia. brs. S. 25° E.
36 lks. distant
a Pine 13 in. dia. brs. S. 39°
25 lks. distant
Both marked 1/4 S. 13. T.
7.00 Leave Ridge crest brs. N. E.
8.00 Set Quartz 16 x 9 x 4. 11 in.
in ground, marked 5 miles
on Sand on E Edge. raised
Stone Mound alongside for
cor. to Secs. 1. 2. 11 & 12
from which
a Pine 8 in. dia. brs. N.
35° E. 20 lks. distant
marked T. 21 N. R 13 E.
S 13. T.
a Pine 15 in. dia. brs.
S. 35° E. 16 lks. distant

BOOK-A-186

marked T. 2 N. R 13 E.
S. 12 B. T.
a Pine 16 in. dia. brs.
N. 55° W 20 lks. distant
marked T. 2 N. R 13 E.
S. 2 B. T.
a Pine 4 in. dia. brs. S. 15°
W. 21 lks. distant
marked T. 2 N. R. 13 E.
S. 11 B. T.
Land, high Ridge
Soil 3rd rate
Timber, Pine on 80 chs.

East on Random line
between Secs. 1 and 12
Var. 16° 35' E.

2.00 Ridge brs. N. E. and S. W.
15.00 N. End of Meadow brs

S 114

South 10 chs.

20.00 Enter meadow bench on side of mountain.

25.00 Leave same

40.00 Set temporary 1/4 Sec. C.

44.00 Enter meadow

49.00 Leave meadow

75.00 Leave timber Enter flat

79.70 Intersect East Boundary of T. 15 N. R. 4 W. of B.M. to Secs. 1 and 12 established by me on this survey. From which I run N 89° 54' W on township line between Secs. 1 & 12 same variation between Secs. 1 & 12

39.85 Set Quartz - 12 x 8 x 6, 8 in. marked 1/4 on N. face and a stone mound alongside for 1/4 Sec. Cor.

BOOK-A-186

From which
a Pine 10 in. dia, bears
S. 20° W 5 lks. distant
a Pine 8 in. in dia. bears
N. 12° W. 8 lks. distant
Both marked B.T.
79.70 The cor. to Secs. 1. 2
11. and 12.
Land mostly mountainous
Soil 3rd and 2nd rate
Timber Pine mostly burnt
75.00 on 79.70 chs.

North on random line
between Secs. 1 & 2
Variation 16° 35' E.
40.00 Set temporary 1/4 Sec. cor.
63.00 Enter totally burnt
Timber

80.12 Intersect N. Boundary of Ty. at cor. to Secs. 1 & 2 re established by me on this Survey from which I run South on true line with same variation between Secs. 1 & 2

40.12 Set Quartz X 4 x 12 x 8. 9 in. in ground, marked 1/4 on W face, and raised a stone mound for 1/4 Sec. cor. from which
a Pine 14 in. diameter brs. N. 80° E. 34 lks. distant
a Pine 12 in. in dia. brs. S. 40° W. 33 lks. distant
Both marked 1/4 S. 1. 2.

80.12 The cor. to Secs. 1. 2. 11 & 12
Land rolling,
Soil Red Clay

BOOK-A-186

Timber Pine, mostly burnt
on 8. 15 chs.

From the Cor. to Secs.
34 and 35 in South
Boundary of Tp. established
by me in this Survey
I run North bet. Secs.
34 and 35
Var. 16° 35' E.

38.75 Spring branch 3 lks. wide
4 in. deep in Hollow runs N. W.

40.00 Set Quartzite 20 x 12 x 6.
15 in. deep marked 1/4 on
W. face and raised a
stone mound along side
for 1/4 Sec. Cor.
From which
A Pine 10 in. dia bears S. 45° E.

3 Lks. distant
a Pine 8 in. in dia. brs.
N. 60° W. 23 Lks. distant
both marked 1/4 S. 15 T.
80.00 Set Quartzite 20 x 10 x 6, in
15 in. in ground marked
1 notch on S and W on E
edges, and raised a stone
alongside
mound for Cor. to Secs.
26. 27. 34 and 35,
from which
a Pine 8 in. dia. brs. N. 25 W.
24 Lks. dist. Marked
T. 2 N. R. 13 E. S. 27 T.
a Pine 10 in. in dia. brs.
S. 15° W. 23 Lks. distant
Marked T. 2 N. R 13 E.
S. 34 B. T.
No other trees in distance
Land rolling

BOOK-A-186

Soil 2nd rate
Timber Pine and Bl. Jacks

East on random line
between Secs. 26 & 35
Var. 16° 55' E.
40.00 Set temp. 1/4 Sec. Cor.
47.00 Enter opening
49.50 Spring Branch 3 lks. wide
4 in. deep runs N.
54.00 Enter Timber ascend
80.12 Intersect N and S. line
at Cor. to Secs. 25. 26. 35
and 36 from which
West one link, with
same variation
between Secs. 26 & 35
46.06 Set Quartzite 26 x 8 x 6
18 in. in ground marked

W. ow N. face raised a
Stone mound alongside
for 1/4 Sec. Cor. from which
a Pine 6 in. dia. brs. S. 15° E
14 Lks. distant
a Pine 6 in. dia brs. N. 30° W
10 Lks. distant
Both marked 1/4 S. 13. T.

80.12 The Cor. to Secs. 26. 27
34 and 35
Land mostly broken
Soil 2nd rate. Rocky
Timber Pine and fir in
26.12 ~~80.12~~ chs.

North between Secs. 26 & 27
Var. 16° 35' E.

6.00 Lake Fork 35 Lks. wide
10 in. deep runs N. E.

BOOK-A-186

8.50 Sand runs N. W.

11.00 " " N. E.

32.00 Ravine drains N. E.

35.75 Spring branch 7 Lks. wide 5 in. deep in Ravine runs N. E.

40.00 Marked a Pine tree 8 in. dia 1/4 S. on W. side and raised a stone mound along side for 1/4 Sec. cor from which a Pine 8 in. dia bears S 45° W 15 Lks distant a Pine 10 in. dia. bears East 28 Lks. dist. Both marked 1/4 S 13. T.

50.00 Sw Hollow drains N. E. Set Sand stone 12 x 10 x 5 8 in. in ground marked 2 notches on S and E. edges and raised a stone mound

along side for bar. to Sec.
22. 23. 26 & 27
from which
a Pine 10 in. dia. bears N.
37° W. 28 lks. dist
Marked T. 2 N. R 13 E. S 22
B. T.
a Pine 6 in. dia bears
S. 53° W 41 lks. distant
Marked T. 2 N R. 13 E.
S. 27 B. T.
a Pine 15 in. diam. bears
S. 70° E 21 lks. distant
Marked T. 2. N. R 13 E. S. 26
B. T.
a Pine 14 in. diam. bears
N. 20 E. 28 lks. distant
Marked T. 2 N. R. 13 E.
S. 23 B. T.
Land rolling

Sec.

Soil 3rd rate, rocky
Timber Pine and Fir
on 80 chs.

9.

32

s

ast

ro

26.

ars

t

East on random line
between Secs. 23 & 26.
Var. 16° 35' E.

4.00 Set temporary ¼ Sec. Cor.

62.00 Lake Fork 50 Lks. wide
15 in. deep in Canon runs N.E

80.10 Intersect N and S. line
42 Lks. South of Cor.
to Secs. 23, 24, 25 & 26.
from which
S. 89° 42' W. on true line
with same variation
between Secs. 23 & 26.

40.05 Set Quartz - 17 x 9 x 5, -
Min. in ground, marked

1/4 cor. N. and raised a stone mound alongside
for 1/4 Sec. cor. from which
a Pine 18 in. diam. bears
N 89° E. 28 lks. dist.
a Pine 21 ins. diam. bears
S. 67° E. 29 lks. dist.
Both marked 1/4 S. B. Y.

80.10 The cor. to Secs. 22. 23
26 and 27.
Land rolling
Soil 3rd rate
Timber, Pine on 80.10 chs.

North between Secs. 22 & 23.
Var 16° 35' E

3.00 Ranges brs. N.E. and S.W.
40.00 Set Quartzite 11 x 10 x 7, 6 ins
in ground, marked 1/4

ow W. Jacs and raised
a stone mound along side
for 1/4 Sec. Cor.
No trees in distance.
80.00 Set Quartzite 18x8x8.
12 in. in ground, marked
3 notches on S. and 2 on
E. Edges and raised a
stone mound alongside
for Cor. to Secs. 14. 15
22 and 23.
From which
A Pine 14 in. diam. bears
N. 50° W. 7 Lks. distant.
Marked T. 2 N. R 13 E.
S. 15 B.T.
A. Pine 17 in. diam. bears
N. 70° E. 6 Lks. dist.
Marked T. 2 N. R 13 E. S 14 B.T.
A Pine 11 in. diam. bears

S. 80° W 15 Lks. distant
marked T. 2 N. R 13 E.
S. 22 B. T.
Land Mountainous
Soil 2nd rate
Timber, Pine on 80 chs.
Sept. 8th 1881

East on random line
between Secs. 14 & 23
Var 16° 35' E.

28.00 Ridge bears N. E. & S. W.
40.00 Set Temporary 1/4 Sec. corr.
79.96 Intersect N and S. line
21 Lks. S. of corr. to Secs.
13, 14, 23 and 24
From which I run S.
89° 51' W. on true line
with same variation
between Secs. 14 & 23.

3.98 Set Quartz 12 x 8 x 6, 8 in. in ground, Marked 1 x ow N. Jacs and raised a stone mound along side for 1/4 Sec. Cor., from which a Pine 8 in. diam. brs. S. 69° W. 23 Lks. distant a Pine 13 in. diam. N. 68° W 13 Lks. dist. Both marked 1/4 S. C. 7.

19.96 The Cor. to Secs. 14, 15, 22 and 23.

Land Broken
Soil 3rd rate
Timber, Pine, mostly small on 79.96 chs.

North between Secs. 14 & 15
Var. 16° 35' E

40.00 Set Quartz 18 X 12 X 8, 12 in. in ground marked 1/4 ow W. Jacd and raised a Stone Mound along side for 1/4 Sec. Cor. from which a Pine 14 in. diam. bears N. 62° E. 7 Lks. distant a Pine 13 in. diam. bears S. 75° W 6 Lks. distant both marked 1/4 S. B. C.

80.00 Set Quartz 16 X 12 X 8, 10 in. in Ground marked 4 notches ow South and 2 ow East edges and raised Stone Mound alongside for Cor. to Secs. 10. 11. 14 and 15 from which a Pine 12 in. diam.

Bears N. 78° W. 13 lks. dist.
marked T. 2 N. R 13 E. S. 11 B.T.
A Pine 13 in. diam. bears
N. 40° E. 8 lks. dist.
marked T. 2 N. R 13 E. S. 11
B. T.
A Pine 12 in. diam. bears
S. 50° E. 16 lks. dist.
Marked T. 2 N. R 13 E.
S. 11 + B. T.
Land N. W. slope
Soil Poor rate
Timber, Pine on 80 ch.

East on random line
between Secs. 11 & 14
var. 16° 35' E.
4,00 Set Temp. 1/4 Sec. Cor.
19,00 Ridge bears N & S.
80.18 Intersect N. & S. line

at cor. to Secs. 11, 12
13 and 14 from which
Witness tree bears
with same variation
between Secs. 11 & 14
40.09 Set Quartz 18x8x6, 15 in.
in ground marked 1/4
on N. face and raised
a stone mound along side
for 1/4 Sec. cor. from which
a Pine 20 in. diam.
brs. S. 80° W. 19 Lks. dist.
a Pine 16 in. diam. brs.
N. 25° W. 16 Lks. dist.
Both marked 1/4 S. B. T.
80.18 The cor. to Secs. 11, 12
13 and 14
Land, North west slope
Soil 1st and 3rd rate
Timber Pine mostly burnt

8018

ow 80 lks.

North bet. Secs. 10 & 11
Var. 16° 35' E

25.50 Enter blade drive N. 11
36.00 Leave same
40.00 Set Quartz 20 x 10 x 7 —
15 in. in ground, marked
1/4 on N. face and
raised a stone mound
alongside for 1/4 Sec. Cor.
From which
A Pine 10 in. diam. bears
S 85° W 24 lks. dist.
A Pine 16 in. diam. bears
S 84° E. 25 lks. distant
Both marked 1/4 S.B.T.
80.00 Set Quartz 16 x 10 x 6, 11 in.
in ground, marked S

notches on S and E on
E. ridges and raised Stone
Mound alongside for
Cor. to Secs. 2. 3. 10
and 11. From which
A Pine 10 in. diam.
bears S 50° W. 8 lks. dist.
Marked T. 2 N. R. 13 E. S 10
B. T.
A Pine 11 in. diam. bears
N 30° E. 8 lks. dist.
marked T. 2 N. R 13 E.
S. 2 B. T.
A Pine 14 in. diam. bears
N. 70° W 12 lks. dist.
marked T. 2 N. R 13 E.
S. 3 B. T.
Land North West slope
Soil 2nd rate
Timber Pine, partially

	Mount on 80. chains
	East on random line
	left Secs. 2 and 11
	Var. 16° 35' E.
14.00	Spring branch 15 lks. wide
	4 in. deep runs North
35.00	Enter Park.
40.00	On West side of Spring
	branch 2 lks. wide 3 in.
	deep runs North
	S.f. Temporary 1/4 Sec. Cor.
43.25	Spring branch 2 lks. wide
	3 in. deep runs North
	Leave Park
80.10	Intersect N and S line
	22 lks. W. of cor. to Secs.
	1. 2. 11 and 12 from which
	N. 89° 51' W. on true
	line left Secs. 2 and 11

with same variation

40.05 Set Quartz 12x10x6. 8 in. in ground, marked 1/4 on N face and raised a stone mound along side for 1/4 Sec. Cor.
No trees in distance.

80.10 The Cor. to Secs. 2. 3. 10 & 11
Land rolling
Soil 1st rate
Timber, Pine, mostly burnt and windfalls on 80.10 chs.

North on random line between Secs. 2 and 3
Var 16° 30' E.

4.00 Set temporary 1/4 Sec. Cor.

	80.16	Intersect N Boundary of Tp. at cor. to Secs. 2 & 3 re-established by me during this survey from which I run South on true line between Secs. 2 & 3 Mk. same Dar.
	40.16	Set Quartz 16 x 10 x 8 in. in ground marked 1/4 on W. Jack and raised a stone mound along side for 1/4 Sec. Cor. from which a Pine 6 in. diam. bears S. 60° E. 15 lks. distant. a Pine 10 in. diam. bears S. 45° W. 7 lks. distant Both marked 1/4 S. B. T.
	80.16	The cor. to Secs. 2. 3. 10 and 11

Land nearly level
Soil 2nd rate
Timber Pine, considerably
burnt on 80.16 Chs.

From the Cor. to Secs.
33 and 34 on South
Boundary of the T.
~~es~~established by me
during this survey, I run
North between Secs. 33 & 34
Var. 16° 30' E.

1.00 Spring branch 3 Links wide
6 in. deep runs N. E.
18.00 Cedar Park
25.00 Level land
40.00 Set Quartz — 16 X 10 X 6.
11 in. deep, marked 1/4 on
N. Jack and raised a stone

BOOK-A-186

mound alongside for 1/4
Sec. Cor. from which
a Pine 18 in. diam. brs.
S 42° W 1/2 Lks. distant
a Pine 9 in. diam. bears
N. 5° E. 45 Lks. distant
Both marked 1/4 S. B. T.

70.75 Spring Branch 4 Lks. wide
6 in. deep in hollow runs
N. E.

80.00 On Ridge bearing N. E. & S. W.
Set Planted Stone 4 x 4 x 6,
20 in. in ground marked
1 notch on S and 3 on E. edge.
and raised Stone mound
along side for cor. to Secs.
27, 28, 33 & 34 from which
a Pine 12 in. diam. bears
S. 64° E. 24 Lks. distant
marked T 21 N. R 13 E. S. 34
B. T.

A Pine 10 in. diam. bears
N. 52° E. 35 lks. distant
Marked T. 2 N R 13 E. S 27 S 7
a pine 16 in diam bears N 30 W. 26 lks dist marked T 2N R 13 E S 26 B.T.
a Pine 14 in. diam. bears
S 75° W. 17 lks distant
Marked T. 2 N. R 13 E. S. 33
B.T.
Land very broken abrupt
East Slope
Soil 3rd rate
Timber Pine on 80.00 chs.

East on random line
between Secs. 27 & 34
19.50 Foot of steep ridge a spring
branch 8 lks. wide 10 in. deep
runs N. E. Va. 16° 35' E.
27.60 Same Spring Branch in Ravine
runs S. E.
33.00 Same Spring Branch in Ravine

BOOK-A-186

	runs N.E.
38.75	Ravine drains N.E.
40.00	Set temporary 1/4 Sec. Cor.
43.25	Ravine drains N.E.
56.60	Ravine drains N.E.
63.75	Deep Ravine drains N.E.
77.50	Lake for R 35 Lks. wide 18 in. deep in barrow runs N.E.
80.60	Intersect N. & S. line at Cor. to Secs. 26. 27. 34. 35 from which Wow true line with same variation between Secs. 27 & 34
40.30	Set Quartzite 36 x 10 x 8 20 in. in ground marked 1/4 on N. face and raised stone mound along side for 1/4 Sec. Cor. from which a Pine 14 in. diam. bears

S 55° E 15 lks. distant
an Aspen 5 in diam,
bears N. 65° W. 27 lks. dist.
Post marked 1/4 S. B. T.
80.60 The cor. to Secs. 27, 28, 33
and 34.
Land rolling
Soil 3rd rate
Timber, Pine Fir, & Aspen
on 80.60 chains

North between Secs. 27 & 28
Var. 16° 35' E.
10.50 Euler Park
14.50 Spring Branch 5 lks. wide
6 in. deep runs N. E.
24.50 Leave Park ascend
33.50 Ridge bears E & W.
40.00 Set Quartz — 22 x 12 x 8, 16 in.
in ground Marked 1/4 on

W. Jacc. and raised a stone Mound alongside for 1/4 Sec. Cor. from which a Pine 7 in. diam. bears S 45° W. 10 lks. distant a Pine 12 in. diam. bears N 86° E 10 lks. distant. Both Marked 1/4 S. 13. 9.

Aspen. 4.00 Enter level Brush

50.50 Descend rock slide

73.00 Foot of steep rock slide

27 28 80.00 Set Quartz — 20 x 10 x 10 in. 15 in. in ground, marked 2 notches on S. and 3 on E. edges and raised a stone mound alongside for Cor. to Secs. 21. 22. 27 and 28 from which

a Pine 17 in. diam. bears S 65° W 18 lks. distant

marked T. 2 N. R 13 E. S. 28 B. T.
a Pine 12 in. diam. bears
N. 48° W. 26 lks. distant
marked T. 2 N. R 13 E. S. 21 B. T.
a Pine 8 in. diam. bears N 70° E
18 lks. dist. marked
T. 2 N R 13 E S. 22 B. T.
Land very broken
North slope
Soil 3rd and 1st rate
Timber Pine on 80 chs.

East on random line
bet. Secs. 22 and 27
Var 16° 35' E.

5.25 Wash in hollow drns. N. W.
41.00 Set temporary 1/4 Sec. cor.
49.00 Ridge bears N. E. & S. W.
80.10 Intersect N & S. line, 19 lks.
N of cor. to Secs. 22. 23.

BOOK-A-186

"8 B.T.		26-27 from which
ears		N. 89° 52' W. on true line
ut		with said variation
2 B.T.		between Secs. 22-27
0.77° E	40.05	Set Quartz 14 x 18 x 4, 9 in.
		in ground marked 1/4 on
?		N face and raised a stone
		mound alongside for
		1/4 Sec. Cor. from which
te		a Pine 12 in. diam. bears
e.		S. 18° W. 16 lks. distant
		a Pine 36 in. diam. bears
Pine		N. 85° E. 38 lks. distant
y		both marked 1/4 S. B.T.
E.	80.10	The corner to Secs.
N.W.		21. 22. 27 and 28
Cor.		Land Mountainous
S.W.		Soil 2nd rate
19 lks.		Timber Pine on 80.10 chs.
23.		

North lat. Secs. 21 & 22

Var. 16° 35' E.

18.25 Spring Branch 3 lks. wide 4 in. deep in hollow runs N.W.

26.00 Euler Park

40.00 Set Quartz 14 x 8 x 7, 9 in. in ground marked 14 on W. face and raised a stone mound alongside for 14 Sec. Cor. from which

A Pine 17 in. diam. bears S. 88° W. 10 lks. distant

A Pine 13 in. diam. bears S 82° E. 30 lks. distant

Both marked B.T.

40.25 Leave Park

47.50 Spring Branch 3 lks. wide 3 in. deep in hollow runs N.W.

80.00 Set Quartz 16 x 16 x 11, 9 in. in ground marked

BOOK-A-186

-22
E.
wide
mus N.W.

9 in.
Ks W.
about
4 Sec. bor.

bears
ant
bears
ant
B.T.

ur de
mus N.W.
4, 9 in.
ed

3 notches on S and E. edge and raised Stone mound alongside for bor. to Secs. 15, 16, 21 and 22. From which a Pine 16 in. diam. bears N. 60° W. 15 lks. distant marked T. 2 N. R 13 E. S. 16 B.T. a Pine 17 in. diam. bears N. 64° E. 24 lks. distant marked T. 2 N. R 13 E. S. 15 B.T. a Pine 15 in. diam. bears S. 30° E 31 lks. distant marked T. 2 N. R 13 E. S. 22 B.T. a Pine 9 in. diam. bears S. 42° W. 39 lks. distant Marked T. 2 N. R 13 E. S. 21 B.T.

Land rolling
Soil 2nd rate
Timber mostly Pine
on 80. chs.

East on random line bet
Secs 15 & 22
Var. 16° 30' E.

15.75 Spring branch 2 lks. wide
2 in. deep runs N. W.

40.00 Set temporary 1/4 Sec. Cor.

55.00 Spring branch 2 lks. wide
2 in deep runs N. W.

80.14 Intersect N & S. line 3/4 lk.
N. of cor. to Secs. 14, 15, 22 & 23
from which N 89° 45' W. on
true line with same variation
between Secs. 15 & 22.

40.07 Set Quartz 16 x 16 x 6, 18 in.
diagonal marked 1/4 on N.
face and raised a stone
mound alongside for 1/4
Sec. Cor. from which
a Pine 18 in. dia. bears
N. 40° E. 10 lks. distant

BOOK-A-186

a Pine 9 in. diam. bears
S. 60° W. 7 lks. distant.

80.14 Post marked 1/4 S. B. T.
The Cor. to Secs. 15. 16. 21 &
22.
Land mostly N. W. slope
Soil Red Sale
Timber Pine on 80.14 chs.

North bet. Secs. 15 & 16
Var. 16° 30' E.

6.25 Hollow drains W.
40.00 Set Quartz 14 x 10 x 8, 9 in.
in ground marked 1/4 on
N. face and raised a stone
mound alongside for 1/4
Sec. Cor. from which
a Pine 16 in. dia. brs.
N 88° W. 20 lks. distant
a Pine 10 in. dia. brs. S. 84°
18 lks. distant.

Both marked 1/4 S. 13 T.

44.30 Hollow drains N. W.

53.00 " " " "

80.00 Set Quartz — 14 X 10 X 10, 9 in. deep, marked 4 notches on S. and 3 on E. edges and raised a stone mound alongside for bot. to Secs. 9, 10, 15 & 16. From which

A Pine 8 in. dia. bears S. 60 W 5 lks. distant Marked T. 2 N. R 13 E. S. 16 B.T.

A Pine 18 in. dia. bears N. 88 E 18 lks. distant marked T. 2 N. R 13 E. S. 10 B.T.

Land nearly level

Soil, 3rd and 4th rate

Timber Pine, some burnt

on 80.00 chs

BOOK-A-186

29.		East on random line between Secs. 10 & 15 Var. 16° 35' E.
9 in.	40.00	Set temporary 1/4 Sec. Cor
ow S.	48.00	Enter Park
raised	57.50	Wash drains N. E.
side	71.50	Enter Timber
15 & 16.	80.40	Intersect N and S. Line 20 lks. N. of cor. to Secs. 10. 11. 14 & 15 from which N. 89° 57' W. true line bet. Secs. 10 & 15, with same variation.
S. 60° W		
ed		
30.		
N. 88° E		
Red	40.20	Set Quartz - 18 x 12 x 6 - 12 in deep, Scribed 1/4 on N face, and raised stone mound alongside for 1/4 Sec. Cor. from which a Pine 9 in. dia. bears S. 68° E. 12 lks. distant
29.		
te		
ment		

a Pine 5 in. dia. bears
N. 30° E. 8 lks. distant.
Both marked 1/4 S. B. T.
80.40 The cor. to Secs. 9. 10. 15 & 16
Land rolling
Soil 1st rate
Timber Pine, considerably
burnt ov 80.40 chs.

North bet. Secs. 9 and 10
Var. 16° 35' E.
40.00 Set Quartz 17 x 9 x 7, 11 in. in
ground, marked 1/4 on W face
and raised a stone mound
alongside, for 1/4 Sec. cor.
from which
a Pine 17 in. dia. bears
N. 57° E. 13 lks. distant
a Pine 11 in. dia. bears
S. 39° W 7 lks. distant

o		Both marked 1/4 S. B. T.
t.	44.00	Euler Park
3. T.	55.00	Leave "
15 & 16	80.00	Set Quartz 12 x 10 x 5. 8 in. in ground marked o notches on S. and 3 on E. Edges, and raised a Stone Mound alongside for Cor to Secs. 3. 4. 9 and 10 from which a Pine 20 in. dia. bears S. 60° W. 12 lks. distant marked T. 2 N. R. 13 E. S. 9 B. T. a Pine 16 in dia. bears S. 65° E. 12 lks. dist. marked T. 2 N. R 13 E. S. 10 B. T. a Pine 18 in. dia. bears N. 10° E. 16 lks. distant Marked T. 2 N. R. 13 E. S. 3 B. T.
bly		
d 10		
E.		
in, in		
W face		
ound		
. Cor.		
o		
ant		
ant.		

Land gentle N. slope
Soil 1st and 3rd rate
Timber, Pine partly burnt over 80 ch.

East on random line
between Secs. 3 & 10
Var. 16° 35' E.

40.00 Set temporary 1/4 Sec. cor.
80.10 Intersect N & S line at
cor. to Secs. 2, 3, 10 & 11
from which I run
West on true line bet.
Secs. 3 & 10.

40.05 Set Quartz 12 x 7 x 7, 8 in.
in ground marked 1/4 on
N. face and raised a stone
mound along side, from which
a Pine 12 in. dia. bears S.
15° E. 11 lks. distant
a Pine 8 in. dia. bears

83

e		N. 85° E. 20 Lks. distant
E		Both marked 1/4 S. 13 T.
rut rd 80 ch.	80.10	Rec cor. to Secs. 3. & 9 & 10
		Land mostly level
		Soil 1st rate
		Timber Pine, partially
~E.		burnt and wind falls
Sec. Cor.	80.10	on 80 chs.
/ at		
9 11		North on random line
/		bet. Secs. 3 & 4
/ bet.		Var. 16° 35' E.
	4.00	Set Temporary 1/4 Sec. Cor.
, 8 in.	80.25	Intersect N. boundary
4 ow		of T. 12 Lks. E. of Cor.
/ stone		to Secs. 3 and 4 re-estab
w which		lished by me on this
o. S.		survey, from which
1		I run S. 0° E. 80 Lks.
ns.		to Cor. bet. Secs. 3 & 4

with same variation

40.25 Set Quartz 16x12x10, 11 in. in the ground marked 1/4 on W. face, with stone mound along side for 1/4 Sec. Cor. from which a Pine 16 in dia. bears S. 20° W. 25 lks. distant a Pine 22 in. dia. bears N. 38° E. 12 lks. distant Brk. marked 1/4 S. B. T.

80.25 The cor. to secs. 3. 4. 9 & 10.

Land rolling

Soil Ind. rate

Timber pine on 80.25 chs.

BOOK-A-186

From the Cor. to Sec
32 & 33, established by me
on this survey I run
North 1ch. Sec. 32 & 33
Var. 16° 35' E.
Descend
19.50 Spring branch 3 lks. wide
4 in. deep runs in hollow runs N. E.
38.00 Enter Meadow
45.00 In swamp meadow set
Quartz 1/4 X 10 X 5, 9 in. deep
marked 1/4 on W. side with
four mound alongside
for 1/4 Sec. Cor.
47.50 Leave Meadow ascend
50.00 Ridge runs N. E. and S. W. desc.
55.00 Timber line E and W.
Enter Pine.
57.90 Spring branch 5 lks. wide,
6 in. deep runs N. E.

8000 Set Quartz 6 x 2 x 8, 11 in. deep, marked 1 Mile N & and 1 mi E. edges, and raised a stone mound alongside for cor. to Secs. 28. 29. 32 & 33 from which
A Pine 9 in. diameter bears S 88° E. 39 lks. distant Marked T. 2 N. R 13 E. S. 33 B.T.
A Pine 6 in. dia. bears S. 20° W 23 lks. distant Marked T. 2 N R 13 E, S. 32 B.T.
No other trees within distance
Land very steep and broken N. slope
Soil Stony
Timber scattering Pine
60 chs. over mountains

11 in.
ow S
raised
side)

29.32.33

ers

S. 33 B.T.
S. 20° W

32 B.T.
distance
ken)

ed)
uns

East on random line
bet. Secs. 28 & 33
Var. 16° 35' E.

Ground

2.00 Spring branch 5 lks. wide
6 in. deep runs N. E.

6.00 Spring branch 20 lks. wide
10 in deep runs N.

20.00 Ridge bns. N. E. & S. W.

Second

40.00 Set temporary 1/4 Sec. cor.

47.50 Enter Timber

62.00 Ridge bns. N. E & S. W.

70.00 Enter Park

73.00 Enter Timber

80.86 Intersect N & S line
4 lks. North of cor. to Secs.
27, 28, 33 & 34 from
which I run N. 89° 58'
on true line bet. Secs.

28-33 with same variation

40.43 Set Quartz 22x10x6, 15 in. in the Ground marked 1/4 on N face, and raised a blue mound alongside for 1/4 Sec. Cor.

80.86 The Cor. to Secs. 28, 29, 32 & 33.
Land Mountainous
Soil 2nd rate
Timber scattering Pine
80.86 chns. over mountains
Sept. 10. 1881

North bet. Secs. 28 & 29
Var. 16° 35' E.

9.00 Euler Park

16.00 Leave scene

35.00 Spring branch, 5 lks. wide 3 in. deep runs E. in hollow

40.00 Set Quartz 12x10x8, 8 in

...ridian
...5 in.
...d
...ised
...side

29.

Pine
...nulans
881
29
E.

...wide
...s hollow
8 in

in ground marked 1/4 on
W. face raised stone
mound along side for
1/4 Sec. Cor. from which
a Pine 10 in. dia. brs. N. 20°
26 lks. distant
a white Balsam 6 in. dia
brs. S. 80° W. 19 lks. distant
Both marked 1/4 S. B. T.

4.00 Sand stone Boulder 10 ft. dia

52.00 Spring branch 5 lks. wide
2 in. deep runs E. in hollow

77.00 Rocky ridge brs. N. E. & S. W.

8.00 Marked Stationary Sand stone
20 x 20 x 18 in. above ground
2 notches on Sand stone
E. Edges and raised a
stone mound along side
for bor. Cor. Secs. 20, 21
28 and 29

No trees within distance
Land very rugged
Soil 3rd rate
Timber scattering Pine
80.00 Lks. over mountains

East on random Line
Meh. Secs. 21 & 28
Ridge Var. 16° 30' E.
3.50 Creek Bears N. E & S. W
2.70 Spring branch 20 Lks. wide
4 in. deep runs N. E in Cañon.
4.00 Set Temporary 1/4 Sec. Cor.
61.50 Enter Park
68.25 Spring branch 5 Lks. wide
2 in. deep runs N. heads
S. in Twin Lakes.
70.00 Enter Timber
79.66 Intersect N. & S. Line
7 Lks. S. of Cor. to Secs

	21, 22, 27 & 28. from which
	S 89° 57' W on true line
	same variation between
	Secs. 21 & 28
3983	Set Quartzite 14 x 12 x 12
	in. deep ground, marked
	1/4 on N. face and raised
	a stone mound alongside
	for 1/4 Sec. Cor. from which
	a Pine 12 in. dia. bears N 48°
	W. 12 lks. distant
	a Pine 12 in dia. bears
	S. 70° W. 14 lks. distant
	Both marked 1/4 S.B.T.
79.66	The cor. to Secs. 20. 21.
	28 & 29
	Land broken
	Boil 1st and 3rd mile
9.66	Corner Pine on 1/4. 66 lks

North bet. secs. 20 & 21

Va 16° 35' E.

Descend

40.00 Set sandstone 10 x 10 x 6 in 6 in. in the ground ~~for~~ mark'd 1/4 on W. face & raised stone mound alongside for 1/4 sec. cor. No trees within distance

80.00 Set sandstone 10 x 8 x 6 in. 6 in. in the ground mk'd 3 notches on S. & 4 on E. edges & raised stone mound alongside for cor. to secs. 16. 17. 20 & 21. from which a pine 18 in dia. bears S 30° E. 9 lks. dist. mk'd T. 2 N. R. 13 E. S. 21. B.T. a pine 18 in. dia. bears N 40° E. 14 lks. dist mk'd

1		T. 2 N. R. 13 E. S. 16 B. T.
		No other Trees within dist.
		Land gentle N. slope
9 X 6 in		Soil 2nd rate
d for		Timber pine on sec. hls.
face		
und		East on random line bet secs.
cor.		16 & 21.
istance		Var. 16° 35' E
6 in.	39.00	Smiths Fork 20 lks wide
mkd		10 in. deep in Cañon runs N.W.
E.	40.00	set stone 1/4 sec. cor.
mound	65.50	Spring branch 3 lks.
6 secs.		wide 3 in. deep in cañon
hich.		runs N. W.
ars	79.25	Intersect N & S line
nkd		90 lks S. of cor. to secs.
B.T.		15. 16. 21 & 22 from which
ers.	22'	I scribe S 89° 34' W. on true
nkd		line bet secs. 16 & 21 with
		same Var.

39.68 Set quartz stone 16 x 10 x 9. 10 in in the ground mkd 1/4 on N. face with stone mound alongside for 1/4 sec. cor. from which.
A pine 4 in dia bears N. 70° E. 44 lks. d.
" " 6. " " " S 65° E 50 lks. d.
Both mkd 1/4 S. B.T.

79.25 The cor to secs 16. 17. 20 & 21.
Sand broken
Soil 2nd rate
Timber pine on 79.25 chs.

North bet. Secs. 16 & 17
Var. 16° 35' E.

2.00 S. E. end of small wash
27.75 Spring branch 3 lks. wide 6 in deep runs N. E.
32.50 Enter Hollow drains N. E.

3. 10 in	36.00	Spring branch 10 lks. wide
1/4 on		6 in. deep runs N. E.
mound	40.00	Set Sand stone 15 x 8 x 5 - 10
cor.		in. in ground marked
		1/4 on W face, and raised
E. 44 lk. d.		a stone Mound alongside
E 50 lk. d.		for 1/4 Sec. cor. from which
		a Oak 4 in. dia. bears S. 40° W
20 & 21		7 lks. distant.
		a Pine 8 in. dia. brs. S. 50° W.
		24 lks. dist.
8 chs.		Both marked 1/4 S. C.
	5.00	Ridge brs. N. E. & S. W.
	79.25	Cutler Hollow drains N. E.
-17	80.00	Set Quartzite 16 x 14 x 8 —
5.		11 in. in the ground marked
ash		4 notches on S and E. edges
ide)		and raised a stone mound
		alongside, for Cor. to Sec.
N. E.		8 & 9. - 16 & 17.

No trees within distance
Land rolling;
Soil 2nd rate
Timber Pine, and aspen &
Windfalls on 80. chs.

East on random line
between Secs. 9 & 16
Var. 16° 35' E.

2.00 Enter Timber Brush
18.50 Leave Timber
25.00 Enter burnt Timber
37.00 Leave Timber.
37.50 Large Swamp runs N.
38.40 Dry Bed & banks for 8
drains North
40.00 Set temporary 1/4 Sec. Cor.
48.50 Hollow drains N. W.
50.00 Enter Timber
80.10 Intersect N & S. line

1.28 Chs. S. of Cor. to Secs. 9. 10. 15 and 16. From which Iron mound S 89° 05' W one link bears Ash. Secs. 9. and 16. on sand variation

4.05 Set Quartz 16x9x6, 10 ins. in ground, chiseled 1/4 on N face, and raised stone mound along side for 1/4 Sec. Cor. No trees within distance.

80.10 The Cor. to Secs. 9. 10. 15 & 16 Land Mountainous Soil 3rd rate Timber scattering burnt Pines 80.10 chs. over Mountains.

North bet. Secs. 8 & 9 Var. 16° 35' E.

.50 Leave hollow drains N.E.

1.00 Set Sand stone 22x12x5

16 in. deep, marked 1/4 on W. face, with stone mound alongside for 1/4 Sec. Cor. from which
A burnt pine 12 in. dia. bears N. 20° E. 19 lks. distant
A burnt pine 8 in. dia. bears S. 55° W. 13 lks. distant
Both marked 1/4 S. B. T.

56.00 Enter Cañon Flat
59.00 Spring branch (2 in deep to rock NE) 4 lks. wide
61.00 Same runs NW.
62.50 Smiths Fork, 20 lks. wide, 10 in deep, runs NW
64.00 Same runs N. E.
65.00 " " N. W.
80.00 On E. side of Smiths Fork R. set Quartz 17 x 16 x 10, 10 in. in ground, marked 5 notches on S. and W. edges, with stone mound alongside, for Cor. to Sec.

4, 5, 8 and 9 from which
a Pine 10 in. dia. bears N. 30°W.
16 lks. distant, marked
T. 2 N. R 13 E. S. 5 B. T.
a Pine 9 in. dia. bears N 40° E.
40 lks. distant marked
T. 2 N. R 13 E. S. 4 B. T.
a Pine 8 in. dia. bears S
10° W. 40 lks. distant marked
T. 2 N. R 13 E. S. 8 B. T.
Land broken Mountainous
Soil & Stone
Timber, mostly Quaking Pine
& rocks over mountains.

East on random line last
Secs. 4 and 9
Var. 16° 30' E.
Ascend
Set temporary 1/4 Sec. Cor.

50.00	Enter Burnt timber and Windfall
70.00	Leave same
80.20	Intersect N and S. line at Cor. to Secs. 3, 4, 9 & 10 from which I run West on true line, bet. Secs. 4 and 9 with same variation.
42.10	Set Quartz 22 x 8 x 4, 16 in. deep, marked 1/4 on N. face with stone mound alongside, for 1/4 Sec. Cor. from which A Pine 22 in. dia. bears N. 70 E. 9 lks. distant A Pine 5 in. dia. bears S. 35 E. 27 lks. distant Both marked 1/4 S. B. T.
80.20	The Cor. to Secs. 4, 5, 8 & 9

Land West slope
Soil 2nd and 3rd rate
Timber Pine partly burnt
on 80.20 chs.

North on random line
bet. Secs. 4 and 5
Var. 16° 35' E.

3.25 Smiths Foot R 15 Lks. wide,
12 in. deep runs N. E.
25.00 Old Saw-Mill Site 3 chs. West
40.00 Set temporary 1/4 Sec. Cor.
42.00 Road bears N.E. and S.W.
73.00 Wood road bears N.E. & S.W.
80.40 Intersect N. Boundary of T.
at cor. to Secs. 4 and 5
re-established by me on this
survey, from which I run
South on true line, bet.
Secs. 4 and 5 with same var.

to

40.40 Set Sandstone 18 x 12 x 6, 12 ins. in the ground, marked 1/4 on NW face, with stone mound alongside for 1/4 Sec. Cor.
No trees within distance.

80.40 The Cor. to Secs. 4, 5, 8 & 9
Land rolling
Soil 1st rate
Timber good pine on 80, 40 chs.

From the Cor. to Secs. 31 & 32 on the S. boundary of the T. established by me on this survey I run
North 40 chs. Secs. 31 and 32
Var. 16° 35' E.
gentle ascend

40.00 Set Quartz 18 x 12 x 10, 12 ins. deep in ground

6, 12

arked

stone

r

ace.

q 9

rods.

9 32

the 9.

this

32

E.

marked 1/4 on W. face
and raised a stone mound
alongside, for 1/4 Sec. Cor
50.00 Ridge bears E & W.
60.00 Entire Rock slide
75.10 Enter Marsh
80.00 Set Quartz 16 x 8 x 7, 11 in. deep
marked 1/4 sec. on S. and S
on E. edges, with stone mound
alongside, for Cor. to Secs.
29, 30, 31 and 32
Land Mountainous
Soil 3rd rate and rocky
No Timber
Brooks over Mountains.

East on random line
bet. Secs. 29 and 32
Var. 16 3/4° E.
40.00 Set Temporary 1/4 Sec. Cor.

41.75	Point of Precipice
	200 ft. high
65.00	N. bound 5 chs. dia. 3 chs. S.
68.00	Enter Timber
80.36	Intersect N. & S. line, 4 lks.
	S. of Cor. to Secs. 28, 29, 32 & 33
	from which I run
	S. 89° 42' W. on true line
	bet. Secs. 29 & 32
40.18	Set Quartz 16 x 10 x 4, 11 in.
	deep, marked 1/4 on N. face
	with stone mound alongside
	for 1/4 Sec. Cor.
80.36	The Cor. to Secs. 29, 30, 31 & 32
	Land Mountainous
	Soil Poor
	Timber Pine on E. 12.36 chs.
	80.36 chs. over mountains.

West on random line
between Secs. 30 & 31
Var. 16° 35' E.

Descend

10.00 Ow rock slide

33.00 Leave same

40.00 Set temporary 1/4 Sec. Cor.

53.00 The White Pine bears 26 lks
E. 7

79.20 The cor. point to Secs. 30 & 31
on the N. Boundary of the T.
and established by me on
this survey, — from which I run
East on true line bet. Secs.
30 and 31. with same variation

39.20 Set Quartz — 16 x 14 x 6. 11 in.
in the ground, marked 1/4 on
N. face, with stone mound
alongside for 1/4 Sec. Cor.

79.20 The Cor. to Secs. 29. 30. 31 & 32
Land Mountainous.

Soil 3rd rate
No Timber
79.20 ds. over mountains.

North bet. Secs. 29 & 30
Var. 16° 35' E.

3.00 Descend Rock slide
5.00 Leave rock slide
4.00 Set Quartz 15 x 10 x 8 —
Wit. in ground marked
1/4 on W. face, and raised a
stone mound along side
for 1/4 Sec. Cor.
46.36 Enter Timber.
a Swamp 9 ins 30 in. diameter
4.00 Descend rock slide
69.00 Leave " "
76.50 Leave Timber
50.00 Set Quartz 15 x 18 x 18 x 8
12 in. in ground

BOOK-A-186

marked 2 notches on S
and 5 on E. edges with
stone mound along side
for Cor. to Secs. 19, 20, 29 & 30
from which
a Pine 5 in. dia. bears N.
20° E. 2.5 lks. distant
Marked T. 2 N. R. 13 E.
S 20 B. T.
No other trees within distance.
Land mostly rocky mountain
slope. Soil 3rd rate
Timber a few dwarf pine
80.00 chs. over mountains

4 East on random line
between Secs. 20 & 29
Var. 16° 35' E.

40.00 Set temporary 1/4 Sec. Cor.
47.02 South as cmd

79.60 Intersect N. & S. line, 22 lks. N. of cor. to Secs. 20, 21, 28 & 29 from which I run N. 89° W. on true line between Secs. 20 & 29

39.80 Set Quartz 10 x 10 x 8, 6 in. deep, marked 1/4 on N. face and raised a stone mound alongside for 1/4 Sec. Cor. from which

A Pine 8 in. diam. bro. N. 20° E. 15 lks. distant.

A Pine 28 in. dia. bro. S. 52° E. 20 lks. dist. Both marked 1/4 S. B. T.

79.60 The cor. to Secs. 19, 20, 29 & 30

Land rolling

Soil 2nd rate

Timber pine

79.60 chs. over mountains

West on random line
between Secs. 19 & 30
Var. 16° 35' E.

5.00 Euler Finder
15.00 Leave "
35.00 Gentle descend
40.00 Set temporary 1/4 Sec. Cor.
43.25 Euler Finder
99.98 Intersect N. boundary
of U.S. Survey No. 3760
to Secs. 19 & 30. Established
by me on this survey
from which I run
S. 89° 22" E. on true
line between Secs. 19 & 30
with same variation.
39.90 Set Quartz 16 x 10 x 6-10 in.
in the ground marked
1/4 on W face and raised
a stone mound alongside

ur), 22
Secs. 20, 21
& I run
true line
29
x8 6 in
N face)
mound
Sec. Cor
Pro. 1,206
Pro. 1,022
marked
0. 29 & 30
ntains

For 1/4 Sec. Cor.

79.90 The Cor. to Secs. 19. 20. 29. 30

Land rolling

Soil 2nd rate

Timber scattering Pine

79.90 chs. over mountains

North bet. Secs. 19 & 20

Var 16° 30' E.

4.00 Set Quartzite 14 x 8 x 5.

in. in ground marked

1/4 on W. face, and raised

stone mound alongside

for 1/4 Sec. Cor. from which

a Pine 18 in. dia. brs. West

18 lks. distant

a Pine 2 in. dia. brs East

8 lks. distant.

Both marked 1/4 S. B. T.

5.00 Gulch draws East

80.00 Set Sand Stone 22×7×5, 16 in. in the ground, marked 3 Notches on Sand Stone E. Edges, and raised a Stone mound alongside, for Cor. to Secs. 17, 18, 19 & 20 Ground, which a Pine 4 in. dia. bears N. 15° E. 12 Lks. distant marked T. 2 N. R 13 E. S. 17 B.T. a Pine 6 in. dia. bears N. 20° W. 16 Lks. distant Marked T. 2 N. R 13 E. S. 18 B.T. No other trees within this distance Land rolling Soil 3rd rate Timber Pine on 80.00 Chs.

20.2950

)'
ue
tains

19 & 20
E.
8×5.
ked
raised
le
which
West

East

B.T.

East on random line
bet. Secs. 17 & 20

Var. 16° 35' E

19.75 Enter grassy opening
25.50 across same
40.00 Set temporary 1/4 Sec. cor.
43.00 Marsh
47.00 across Marsh
69.75 N. end of small pond
73.90 Spring branch 3 lks. wide
4 in. deep runs N.
80.46 Intersect N & S. line 39 lks.
N of cor. to Secs. 16. 17. 20
and 21 from which I run
N. 89° 45' W on true line
bet. Secs. 17 & 20
with same variation
40.23 Set sandstone 16 x 10 x 5,-
11 in. in the ground, marked
1/4 on N face and raised a

Stone mound alongside
for 1/4 Sec. Cor. from which
a Pine 10 in. dia. bears N. 15° E
33 lks. distant
a Pine 20 in. dia bears S. 2° E.
34 lks. distant.
Both marked 1/4 S. 13. T.

80.46 The cor. to Secs. 17. 18. 19 & 20
Land rolling
Soil 2nd rate
Timber Pine on 80.46 chains

West on random line
bet. Secs. 18 & 19
Var. 16° 30' E

40.00 Set temporary 1/4 Sec. Cor.
61.50 Descend
65.00 Perpendicular Bluff.
79.75 Intersect N. Boundary
of T. 50 N. R. 17 W. 4th
Sec. 18 & 19 established
by me on this survey
from which I run N. 89°
30' E. on true line between
Secs. 18 & 19 with same var.
39.75 Set Quartzite 16 x 10 x 5.
Min in the ground marked
1/4 on N. face and raised
a stone mound alongside
for 1/4 Sec. Cor.
79.75 The Cor. to Secs. 17. 18. 19 & 20
Land rolling

Soil Rate

Timber & Saline Land

79.75 chs. over mountains

Sept. 13th 1881

-E

ec. Cor.

ff.

ndary

Cor. to

'ked

rey

N. 89°

e between

ame var.

x 10 x 5.

marked

aired

ong side

7. 18 1992

North 1/4 Sec. 17 & 18

Var 16° 30' E.

17.50 N. E. from ✓ low ridge

21.50 Head of hollow drains N.E.

40.00 Set Quartzite 36 x 18 x 8.

24 in. in ground marked

1/4 on W. face and raised

a stone mound alongside

for 1/4 Sec. Cor. from which

A Pine 18 in. dia. bears N. 65° E.

24 lks. distant.

A Fir 5 in. dia. bears N. 70° W.

19 lks. distant

Both marked 1/4 S. 17 & 18

80.00 Set Quartz 13 x 9 x 6. 7 in.

in ground marked 1/4

notches on S and S on E. edges
and raised a stone mound
alongside for cor. to Secs.
7. 8. 17 and 18. from which
a Pine 10 in. diam. bears N. 20° E.
7 lks. distant marked
T. 2 N. R. 13 E. S. 8. B. T.
a Pine 2 in. diam. bears
N. 30° W 12 lks. distant
Marked T. 2 N. R 13 E. S. 7 B. T.
a Pine 10 in. dia. bra. S. 25° W
5 lks. distant marked
T. 2 N. R 13 E. S. 18 B. T.
a Pine 12 in. dia. bra. S. 40° E.
37 lks. distant marked
T. 2 N. R 13 E. S. 17 B. T.
Land rolling
Soil Red Shale
Timber Pine and Fir
on 80 cla.

EOCh-A-186

E. Edge
ound
Sec.
which
N. 20° E.
Red
B. T.
ears.
stant
S. 7 5/8 L.
S. 20 W
ed
B. T.
S. 40 E.
Red
T.

East on random line bet.
Secs. 8 and 17
Var. 16° 30' E.

16.50 Euler Park
16.75 Euler Timber.
40.00 Set temporary 1/4 Sec. cor
41.50 Mark drain N. W.
50.50 " " " "
55.00 " " " "
88.25 Intersect N and S. line
30 Lks. N of cor. to Secs.
8. 9. 16 & 17 from which
N 89 1/4 W set on true
line between Secs. 8 & 17
with same variation
42.12 Set Quartzite 14 x 14 x 3
6 in. in ground marked
1/4 on N. face and raised
a stone mound alongside
for 1/4 Sec. cor. from which

A Pine 6 in. dia. brs. S. 10° W
13 lks. distant
A Pine 30 in. diam. bears
N. 15° W 28 lks. distant
Both marked 1/4 S. B. T.
74.00 The Cor. to Secs. 7. 8. 17 & 18
Land rolling
Soil 1st rate
Timber Pine & Fir
as 74.00 do.

Weston random line
bet. Secs. 7 and 18
Var. 16° 35' E
40.00 Set temporary 1/4 Sec. cor.
61.00 abrupt descend
79.10 Intersect W Boundary of T
32 lks. S. of Cor. to Secs.
7 & 18 established by me
on this survey from which

BOOK-A-186

I run S 89°46' E. on
true line with same variation
between Secs. 7 & 18
39.10 Set Quartzite 18x6x6, 12 in
in ground marked 1/4 on
W face and raised a Stone
mound along side of for 1/4 Sec. Cor.
79.10 The Cor. to Secs. 7. 8. 17 & 18
Land rolling
Soil 1st rate
Timber scattering pine
Mountainous over 79.10 chs.

North bet. Secs. 7 & 8
Var. 16°35' E.
25 00 Enter Park
30 00 Leave same
40 00 Set quartzite 12x8x8, 8 in.
in ground marked 1/4 on
W. face and raised a
Stone Mound along side

for ¼ Sec. Cor. from which
a Pine 16 in. diam. bears
S. 85° E. 22 lks. distant.
a Pine 4 in. dia. bears
N 89° W. 15 lks. distant
both marked ¼ S. B. T.
48.50 East end of park
80.00 Set Quartz 18 x 16 x 5 12 in.
in ground marked 5 notches
on S. and E. Edges, and
raised a stone mound
alongside for Cor. to Secs.
5. 6. 7 and 8. from which
a Pine 20 in. diam. bears
S. 70° E. 26 lks. distant
marked T. 2 N. R 13 E.
S. 8 B. T.
a Pine 9 in. dia. bears N. 40° E
11 lks. dist. marked
T. 2 N. R. 13 E. S. 5 B. T.

w which
bro.
istant
bears
Ks. distant
S. B.T.
R
5 12 in.
d Notches
and
und
r. to Sec.
ow which
, bears
distant
3 E.
ra. N. 40E
Cor.
5 B.T.

A Pine 12 in. diam. bro.
S. 75° W. 8 lks. distant mar Tree
T. 2 N. R 13 E. S. 7 B.T.
Land rolling
Soil 2nd rate
Timber Pine on 80. chs

East on random line
bet. Secs. 5 & 8.
Var. 16° 35' E.

40.00 Set temporary 1/4 Sec. Cor.
79.60 Smiths Fork 25 lks. wide
12 in. deep runs N.
80.18 Intersect Rand S. line
at bor. to Secs. 4, 5 - 8 & 9
from which I run West
on true line with same
variation bet. Secs. 5 & 8
40.09 Set Quartz 14 x 10 x 4 in
in ground marked 1/4

	on N. face and raised a stone mound alongside Cor. 1/4 Sec. Cor. found which a Pine 12 in. diam bears S 60 E 4 lks distant. A Pine 16 in. diam bears N 80 E 6 lks. dist. Both marked 1/4 S. B. T.
80.18	The Cor. to Secs. 5. 6. 7 & 8 Land rolling Soil Poor Timber Pine partly burnt on 80.18 chs
	West on random line between Secs. 6 & 7 Var. 16° 30' E.
3.00	Dry Gulch draining N. E.
40.00	Set temporary 1/4 Sec. Cor.
78.60	Intersect W. Boundary

of Tp. at cor. to Secs. 6 & 7
Re-established by me on
this survey from which
I run E. on true line
bet. Secs. 6 & 7 with same
variation

38.60 Set quartz 18 x 6 x 6. 12 in.
in ground marked 1/4 on
N face and raised stone
mound alongside for
1/4 Sec. cor. from which
a Pine 6 in. diam. bears
S 40° E. 5 lks. distant
a Pine 6 in diam bears
N. 10° E. 5 lks. distant
Both marked 1/4 S. B. T.

78.60 The cor. to Secs. 5. 6. 7 & 8
Land nearly level
Soil Red rock
Timber Pine on 78.60 chs.

North on random line
bet. Secs. 5 & 6.
Var. 16° 35' E.

7.00 Hollow—drains N. E.
48.00 Set temporary 1/4 Sec. Cor.
80.74 Intersect N. Boundary of T.
at Cor. to Secs. 5 & 6, re-established by me during this survey from which I run South on True line with Same Var. bet. Secs. 5 & 6
40.74 Set quartz 10 x 10 x 6. 6 in in ground marked 1/4 on W. face and raised a stone mound alongside for 1/4 Sec. Cor. from which a Pine 12 in. dia. bears N. 89° W 33 lks. distant, a Pine 4 in. dia. bears N. 80° E. 10 lks. distant

Both marked 1/4 S. B.T.
80.74 The bor. to Srs. 5.6.7.8
Land rolling
Soil R5 rate
Timber Principal 80.74 chs.
September 14th 81

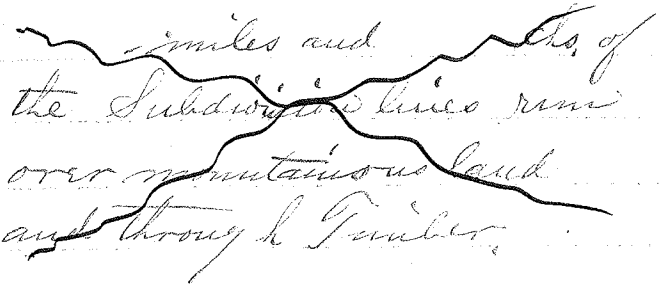

General Description

This Township is composed principally of Timber land bearing mostly white and yellow pine averageing 16 ins diameter, there is also some fir and red pine. The timber is accessable from Smiths Fork Canyon through which a waggon road has already been built.

Sec. 5 contains an old Saw Mill site, there are no other improvements in this Township

A. D. Ferron
U. S. Dep. Surveyor

Book A-100

Subdivisions Tp. 2 N. R. 13 E.

Survey commenced
Sept. 7th. 1881
The Instrument used is
Youngs Solar Transit
No 4901, examined and
approved by the Office.
I commenced at the
cor. to Secs. 35 and 36 on
the South Boundary of the
Township set by and on
this survey a quartzite 30x4x9 with
mound of stone &
2 bearing trees.
from which I run
North between Secs 35 & 36
Var. 16° 35' E.
Ascend
40.00 On E. side of high peak.
marked Stationary
Quartzite 24x10x10 in.
about ground, 1/4 on N.
side and raised above

mound alongside for
1/4 Sec. Cor.
Down which
a Balsam 10 in. dia. bears
East 50 lks. mkd. "1/4 S. B. T."
No other trees in distance

52.50 Enter Lake Flat
53.63 South side of Lake Hayden
70.85 N. side of Lake Hayden
71.50 Spur Ridge bears N.E. & S.W.
80.00 Set Quartzite 18 x 8 x 6,
12 ins. in ground marked
1/4 notch on Sand Edges &
raised Stone mound along
side, for Cor. to Secs.
25. 26. 35 & 36. Down whi
a Pine 18 in. dia. bears N.
25° W. 29 lks. dist.
Marked T. 2 N. R. 3 E.
S. 26. B. T.

BOOK-A-186

A. Pine 6 in. dia. brs. N 20° E.
12 lks. distant. Marked
T. 2 N. R. 13 E. S. 25 B.T.
A Pine 6 in. dia. brs.
S. 35° W. 14 lks. distant.
Marked T. 2 N. R. 13 E.
S. 35 B.T.
A Pine 10 in. dia. brs.
S. 45° E. 31 lks. distant
marked T. 2 N. R. 13 E.
S. 36. B.T.
Land rocky and high
Mountain
Soil 3rd rate
Timber scattering Pine
Mountainous on 6.165 chs.

East on random line
between Secs. 25 & 36.

var. 16° 35' E.

8.00 Spurr Ridge bro. N. E & S. W.
32.00 Enter Meadow
32.95 Spring branch 12. lks. wide
8 in. deep runs N. E.
35.00 Leave Meadow — Ascend
40.00 Set temporary 1/4 Sec. Cor
80.16 Intersect E. boundary of T.
42 N. R. 7 E. Cor. to Secs
25 and 36. established by
me on this survey, from
which I run
N. 89° E 2' More true
line with same variation
between Secs. 25 & 36.
40.08 Set Quartzite 20x8x6.
15 in. in ground marked
1/4 on N. face and raised
a stone mound along side
for 1/4 Sec. Cor. from which
tree 6" [illegible]

BOOK-A-186

781.

[4.—LIST OF NAMES.]

A list of the names of the individuals employed by A. D. Ferron United States deputy surveyor, to assist in running, measuring, and marking the lines and corners described in the foregoing field notes of the survey of Exterior & Subdivisions of Tps. 2 & 3 N., Rs. 11 & 12 E.

of the Salt Lake base and meridian in the Territory of Utah, showing the respective capacities in which they acted.

....., Compassman.

R. L. Rowe, Chainman.

J. Poulsen, Chainman.

J. Ingvald Ferdinand Price, Chainman.

C. Carlson, Chainman.

S. J. Monson, Axeman.

E. F. Osterhout, Axeman. Flagman

....., Flagman.

[5.—FINAL OATHS OF ASSISTANTS.]

1327

We hereby certify that we assisted Augustus D. Fenn United States deputy surveyor in surveying all those parts or portions of the Extension & Subdivision of Tp 2 S, 3 W. R 12 & 13 E.

of the Salt Lake base and meridian in the Territory of Utah, as are represented in the foregoing field notes as having been surveyed by him and under his direction; and that said survey has been in all respects, to the best of our knowledge and belief, well and faithfully surveyed, and the corner monuments established according to the instructions furnished by the United States surveyor-general for Utah.

....., ~~Compassman~~.

R L Rowe, Chainman.

J Pulsipher, Chainman.

Fred'k Free, Chainman.

L. Carlson, Chainman.

S. S. Thomson, Axeman.

C F Robertson, Axeman. to Flagman

....., Axeman. and Flagman.

Subscribed and sworn to before me this ..... day of Sept. 14 1881

A D Fenn

U. S. dep. surveyor.

BOOK-A-186 133

[6.—FINAL OATH OF UNITED STATES DEPUTY SURVEYOR]

I, Augustus D. Piercy

United States deputy surveyor, do solemnly swear that in pursuance of instructions received from Fred Dalouse

United States surveyor general for Utah, bearing date of the ~~July~~ 29th day of July, 1881, I have well, faithfully, and truly, in my own proper person, and in strict conformity with the instructions furnished by the United States surveyor general for Utah, the surveying manual, and the laws of the United States, surveyed all those parts or portions of the Exterior and Subdivisions of Twp 20 S R 12 and 13 E.

.....of the Salt Lake base and meridian in the Territory of Utah, as are represented in the foregoing field notes as having been surveyed by me and under my directions; and I do further solemnly swear that all the corners of said survey have been established and perpetuated in strict accordance with the surveying manual, printed instructions, the special written instructions of the United States surveyor general for Utah, and in the specific man-

ner described in the field notes, and that the foregoing are the TRUE field notes of such survey; and, should any fraud be detected, I will suffer the penalty of perjury, under the provisions of an act of Congress, approved August 8, 1846.

Augustus D. Gerow

United States Deputy Surveyor.

Subscribed and sworn to before me this 24th day of October 1881

Edward Michaelis

Notary Public

BOOK-A-186

Report.

Salt Lake City, October. 20th 1881.

I have the honor herewith to return the survey of Tps. 2 & 3 N., Rs. 12 & 13 E. made under contract No. 105. dated July 29. 1881.

That more than the usual time was consumed in the survey was due to the nature of the ground, being very broken & partly covered with rock slides, especially the southern portion of Tp. 2. N. Rs. 12 & 13 E. of which a small part falls above the timber line.

The land is mostly well timbered. The timber being principally aspen but the white & yellow pine averaging about from 12 to 18 ins. in dia., although it reaches up to 7 feet dia., but by far the greater part consist of

young growth. This is due to its being periodically destroyed by fire caused mostly by wandering Indians, as already fully explained in my preliminary report. On this account the country is full of dead timber, but the fertility of soil or rather suitableness of the ground for forest raising is insured by the constant accession of young growth forcing its way through dead timber. There is a good wagon road up Blacks Fork and also up Smiths Fork, on the latter creek are the remains of 2 steam saw mills. Blacks Fork furnishes an abundance of water, sufficient to run large mills by water power, but the best timber is

its being
ne caused
, as already
liminary
country
but the
ibleness.
vising
nt
th
Dead
wagon
and
with
ins of
Jacks
dance
run
over,

situated on Smiths Fork,
besides the species of white &
yellow pine mentioned above
there is fir, spruce & aspens,
but all very scarce.

Very Respectfully
A. D. Lerron
U. S. Dep. Surveyor.

U. S. SURVEYOR GENERAL'S OFFICE,

Salt Lake City, Utah, Jan 25th, 1882

The foregoing field notes of the survey of the

Subdivisions

Township No 2 N. Range No 13 E.

of the Salt Lake Meridian, Utah Territory,

Executed by Augustus D. Ferron

Under his contract No 105

of the 29 day of July 1881,

in the month of Sept. 1881,

having been critically examined, the necessary corrections and explanations made, the said field notes, and the surveys they describe are hereby approved.

Fred Salsbury

U. S. Surveyor General for Utah.

DUMA-186

R: 1882, 139

Filed 187 .

Examined by John D. Campe.

Compared by M & F. Linton

FIELD NOTES

OF

THE SURVEY OF THE

Re Exterior

of Township No. 3 N., Range No. 12 E.

of the Salt Lake Meridian in Utah Territory.

BY

N. D. Ferron

U. S. DEPUTY SURVEYOR,

Under his Contract No. 105 &c.

dated July 29 " 1881.

Survey commenced Aug. 13 &c " 1881.

Survey completed Aug. 15 &c " 1881.

186-3

BOOK-A-186

Township 3 N. R. 12 East

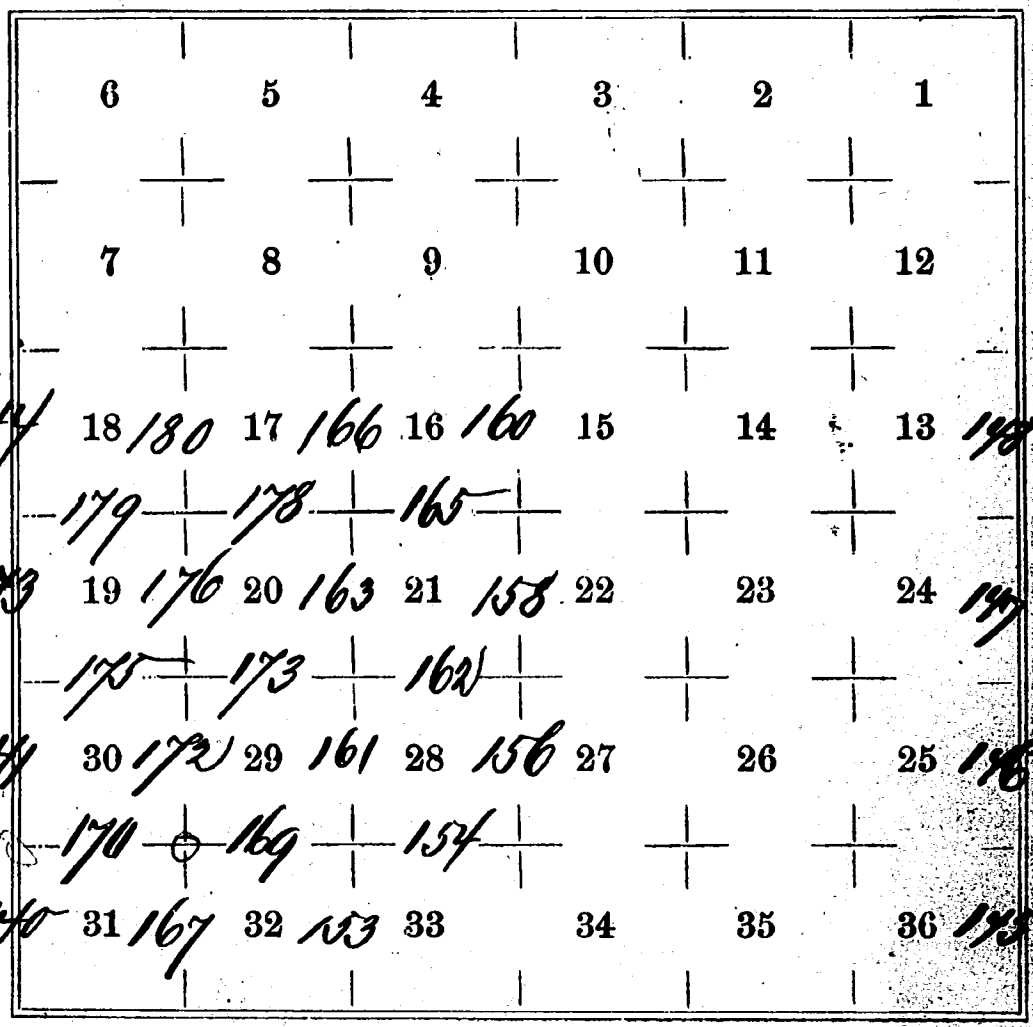

BOOK-A-186 Resurvey of the 140
Exteriors T. 3 N. R. 12 E.

Chs. Survey commenced August 13th 1881, with Youngs Solar Transit #4901
From the established cor. to Twps. 2 and 3 N. Rs. 11 and 12 E. being a sandstone 20 x 12 x 4 ins. firmly in the ground, marked 6 notches on N. S. 6 and W. edges & bearing true Standing Pine
North bet. Secs. 31 and 36
Va. 16' 30' E.

6.00 Gully drain E.
12.00 Center post.
20.00 Leave Lane.
28.50 Ridge bears N.E. and S.W.
40.00 Post 1/4 Sec. cor. being a Sandstone 14 x 12 x 4 ins.

1882
of the
26
1881,
1881,
necessary
the said
scribe are
for Utah.

Resurvey of the Exteriors of

Chs.		
	firm in the ground, mkd.	
	1/4 on W. face, 2 bearing	
	trees standing all agreeing	
	with description furnished	
	by the office.	
80.00	The cor. to Secs. 25, 30, 31	
	and 36 being a sand stone	
	14 x 12 x 3 ins. firm in the	
	ground, mkd. 5 notches on	
	the N. and 1 notch on the	
	S. edges & bearing trees	
	standing all agreeing with	
	description furnished by the	
	office.	
	Land, rolling	
	Soil, 2nd rate.	
	Timber, pine,	

North bet. Secs. 25 and 30
Va. 16° 30' E.

BOOK-A-186

3 N. R. 12 1/2 E. S. L. M.

Chs.	
2.00	Spring branch 5 lks. wide 4 ins. deep, runs N. W.
7.00	Leave timber.
16.00	Center "
39.80	Creek 10 lks. wide 6 ins. deep runs N. E.
41.00	The 1/4 Sec. cor. being a sand stone 15 × 8 × 6 ins. firmly in the ground, marked 1/4 on W. face, raised a stone mound along side,
80.00	The cor. to Sec. 19, 24, 25, and 30 being a sand stone 18 × 14 × 8 ins. firmly in the ground, mkd. 4 notches on N. and 2 notches on S. edges, 4 bearing trees standing, all agreeing with description furnished by the office

1882

of the

1881,

1881,

necessary

the said

ribe are

for Utah.

Resurvey of the Exteriors T. 30 S. R. 3 E.

Chs.		Chs.
	Land, very broken	
	Soil, 3rd rate.	
	Timber, Pine & fir.	
	North bet. Sec. 19 and 24	17.00
	Va. 16° 35' E.	19.7
25.00	Spring branch 10 lks. wide	27.5
	6 ins. deep, runs N.W.	34.0
30.00	Enter dead timber.	36.6
40.00	The 1/4 Sec. cor. being a Sand	
	Stone 15 x 10 x 4 ins., firm	
	in the ground, mkd 1/4 on	
	N. face, 1 bearing tree Standing	
80.00	The cor. to Sec. 13, 18, 19 and 24	
	being a Sand Stone 20 x 16 x 8	
	ins. firm in the ground, mkd	
	3 notches on N and S. edges.	
	1 bearing tree Standing.	
	Land, rocky	
	Soil, 2nd rate	

BOOK-A-186

3 N. R. 12 E S.L.M.

Chs.	
	Timber, dead pine.
	North bet. Secs. 13 & 18
	Va 16° 35' E.
17.00	Park
19.75	Leave same
27.50	Enter park
34.00	Leave "
36.67	Intersect Utah and Wyoming boundary line 12 chs. N. of mile post No 346 where I find a sand stone 20 x 12 x 5 ins., firmly in the ground marked "U. & W." with stone mound along side for closing corner to fractional Sec. 13 and 18
	Land, broken.
	Soil, 3rd rate.
	Timber, dead pine.

1882

of the

28

1887

1887

essary

ve said

ibe are

or Utah.

Resurvey of the Exterior

BOOK

Chs.	August 13th 1881	Chs.
	From the established cor. to Tps. 2 & 3 N. R 2 W x N x E. which is a boulder 14 x 8 x 8 ins. firmly in the ground mkd. 6 notches on N. E. & W. edges, & bearing trees standing. Drum.	44.00
	North bet. Sects 31 & 36.	
	Va. 16° 35' E.	
44.00	The 1/4 Sec. cor. being a Sandstone 14 x 12 x 3 ins. firmly in the ground, mkd. 1/4 on W. face, 1 bearing tree standing.	65.00
80.00	The cor. to Sects. 25, 30, 31 & 36, being a pine 9 ins. diam, mkd. 5 notches on	80.00

BOOK-A-186

T. 3 N. R. 12 E. S.L.M.

Sec. N. x 1 notch on S. edge, H bearing trees standing
Land level,
Soil, 2nd rate.
Timber, pine, fir + aspen.

North bet. Sec. 25 and 36 1882
Va. 16.35 E.

4[illegible].00 The 1/4 Sec. cor, being a Sand Stone 15 x 12 x 3 ins. firmly in the ground, mkd 1/4 on W. face, 2 bearing trees standing. 1887,

65.00 Cubic dead Timber. 1887,

80.00 The cor. to Sec. 19, 24, 25, and 30, being a Sand Stone 16 x 11 x 4 ins. firmly in the ground, mkd. 4 notches on N. and 2 notches on E. edges, and raised a

147

Resurvey of the Exterior

Chs — mound of stone alongside.
Land, bad plateau.
Soil, 2nd rate.
Timber, dead pine.

North bet. Secs. 19 and 24

Va. 16° 35' E.

34.00 Abrupt bluff, found 1/4 Sec. Witness cor. ~~(rock projecting)~~

40.00 (Not previously set) ~~Set~~ a sandstone, 16×14×6 ins. 15 ins. in the ground, for 1/4 Sec. cor. raised a stone mound alongside,

80.00 The cor. to Secs. 13, 18, 19 and 24, being a sandstone 20×10×4 ins. 15 ins. in the ground, mkd 3 notches on S. and N. edges, & bearing trees

H 0.0

H 8.5

BOOK-A-186

100

T. 3 N. R. 118 W. 26th P.M.

Chs.	
	Standing.
	Land, broken.
	Soil, 2nd rate.
	Timber, pine.
	North bet. Secs. 13 & 18
	Va. 16° 35' E.
40.00	The 1/4 Sec. cor. being a Sand Stone 15 x 10 x 4 ins. 10 ins. in the ground, mkd. 1/4 on W. face. 2 bearing trees Standing
48.50	Intersect State of Wyoming boundary line 14.50 chains N. of mile post N° 340, where I find a white Sand Stone 18 x 13 x 3 ins. firmly in the ground, mounded "M.C.C." for Closing cor. to fractional Secs. 13 & 18, 2 bearing trees Standing

109

Land, rolling.
Soil, 3rd rate.
Timber, fair.
August 15th 1881.

Note: For General Description
See subdivisions of this
township.

A. D. Perrow
U.S. Dep. Surveyor

BOOK-A-186

1870

U. S. SURVEYOR GENERAL'S OFFICE,

Salt Lake City, Utah, Jan 20th 1882

The foregoing field notes of the survey of the Exterior

Township No 3 N. Range No 12 E

of the Salt Lake Meridian, Utah Territory,

Executed by A. D. Farnum

Under his contract No 105

of the 29th day of July 1881,

in the month of Aug 1881,

having been critically examined, the necessary corrections and explanations made, the said field notes, and the surveys they describe are hereby approved.

Fred. Salsbury

U. S. Surveyor General for Utah.

BOOK A 186
R. 1882. 151

Filed 187 .

Examined by John H. Campbell

Compared by R. Gorlinske & F. Linton

FIELD NOTES

OF & RESURVEY

THE SURVEY OF THE Subdivisions

of Township No. 3 N. , Range No. 12 E.

of the Salt Lake Meridian in Utah Territory.

BY

A. D. Ferron

U. S. DEPUTY SURVEYOR,

Under his Contract No. 105

dated July 27. 1881.

Survey commenced Aug. 20 1881.

Survey completed Aug. 23. 1881.

186-4

151A

Township 3 N. R. 12 East

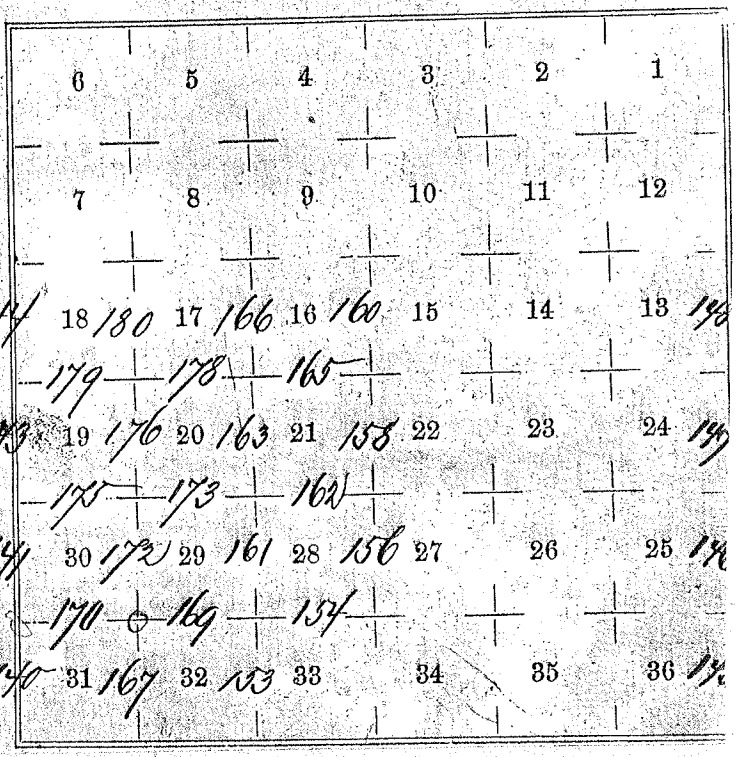

BOOK-A-186

182

Subdivisions Tp. 3. N., R. 12. E.

Survey commenced
August 20th 1881.
The instrument used is
Youngs solar transit No 4901
adjusted to a meridian obtained
by an observation of Polaris,
taken on the night of Aug. 5th 1881.

I commence at the cor. to
secs 32. & 33. on the S. boundary
of the Tp. reestablished by me
which is a boulder
20 x 18 x 8 ins, firmly set in the
ground, marked 4 notches on
E & 2 on W. edges, with stone mound
from which
a pine 7 in dia. bears N. 40° E 40 lks dist
marked T. 3 N, R. 12 E. S. 33.
B.T.
a pine 8 in dia. bears N. 60° W. 11 lks dist
marked S. 32. B.T.

a pine 15" dia bears S. 35° E. 40 lks dis
marked S. 4. B.T.
a pine 18" dia bears S. 10° W. 60 lks dis
marked T 2. N. R. 12. E.
S. 5. B.T.
Henne Drum
Resurvey.
N. betw. secs. 32 & 33.
Va. 16° 30' E.

6.50 Hollow drains S. E.
35.00 Steep descent bears N. W. & S. E.
39.97 7 lks W. of 1/4 sec. cor., being a
sandstone 16 x 10 x 4, to which I
erect a stone mound, bearing
trees standing, being a pine
8 in. dia. bears N. 45° W. 14 lks dis
a pine 8" dia " S. 45° E 12 "
both marked 1/4 S.B.T.
41.25 Road bears N. W. & S. E.

BOOK-A-186

43.50. Bottom of hollow drains S. E.
Ascend

79.89. 14 lks W. of cor. to secs 28. 29. 32. 33.
being a sandstone 10 x 10 x 10 ins
5 ins. deep, marked 4 notches on
E & on S. edges, I raised a stone
mound alongside 4 bearing
trees standing all properly
marked according to the
description furnished by the
Office.
Land, rolling
Soil, 1st & 2d - rate
Timber, white pine, averaging
about 15 ins diam., on 79.89 chs.

Resurvey.
East bdry. secs. 28 & 33.
Va. 16° 35' E

5.00 Enter small park
10.00 Leave same
20.00 Enter meadow park drains N.
21.55 Spring branch 3 lks wide, 6 ins deep runs N.
22.75 Leave park enter timber
39.95 18 lks N. of 1/4 sec. cor., being a sandstone 14x10x6, firmly set in the ground, marked 1/4 on N. side, to which I raised a stone mound 2 bearing trees standing, agreeing with the description furnished by the Office.
40.40 Enter park, a spring branch 4 lks wide, 4 ins deep runs N.
45.75 Leave park
53.00 Enter hay park
58.00 Pond 3 chs wide
61.00 Leave park

BOOK-A-186

74.00 Enter park

79.00 Leave same

82.12. 13 lks N. of cor. to secs. 27, 28, 33, 34, being a boulder 18 x 9 x 8, firmly set in the ground, marked 3 notches on E & 1 on S. edges to which I add a stone mound 4 bearing trees standing agreeing with the description furnished by the Office.

Land, heavy rolling

Soil, 1st rate

Timber, white pine & aspen average 16 in. diam, on 56.02 chs

Resurvey.

North betw. secs. 27 & 28

Va. 16° 35' E.

6.00 Leave timber, enter open ground with

15.50 Road bears N. W. & S. E.

25.00. Edge of road

31.00 across same

40.00. The point for the 1/4 sec. cor. falls in Blacks Fork, 1.45 chs. E. of Witness 1/4 sec. cor., being a boulder 18x16x8 firmly set in the ground, marked 1/4 on W. & W. side, to which I add a stone mound, 2 bearing trees standing, agreeing with the description furnished by the Office.

56.00 Left bank of Blacks Fork. 115 lks wide, 18 ins deep runs N. E.

80.00. The cor. to secs. 21. 22. 27. 28., being a boulder 17x11x6., firmly set in the ground, marked 3 notches on E & 2 on S. edges to which I add a stone mound

BOOK-A-186

2 blazing trees standing which agree with the description furnished by the office.
Land, mostly level bottom
Soil, 2d rate
Timber, scattering pine and undergrowth on 80 chs.

Resurvey
North betw secs. 21 & 22
Var. 16° 35' E.

2.75. Black Fork 100 lks wide, 18 ins deep runs N. W., cross Black Fork 5 times.

27.50. Right bank of Black Fork 60 lks wide, 15 ins deep runs N. W.

40.00. The 1/4 sec. cor. being a sandstone 18 x 12 x 8, firmly set in

the ground, marked 1/4 on W. side to which I add a stone mound 2 bearing trees standing and agreeing with the description furnished by the Office

Thence along foot of hills

66.50 Rd road bears E. & W.

80.00 The cor to sec. 15.16.21.& 22, being a boulder 17 x 11 x 6. firmly set in the ground, marked 3 notches on S. & E. edges, 2 bearing trees standing which agree with the description furnished by the Office

Land, heavy rolling & broken

Soil, 2d rate

Timber, scattering pine and mountainous over 80.00 chs

Resurvey.

BOOK-A-186

160

North betw secs. 15 & 16.
Va. 16° 35' E.

1.50 Enter heavy timber
31.00. Point of ridge bears N. E.
40.00 The 1/4 sec. cor. being a sandstone 15x12x4, 10 ins deep, marked 1/4 on W. side, to which I add a stone mound, 2 bearing trees standing which agree with the description furnished by the Office.
46.50. Intersect boundary line between Utah and Wyoming 12 chs West of mile post. 343., which I find marked by a sandstone 12x8x7. firmly set in the ground, marked U.C.C., 2 bearing trees standing which agree with the description furnished by the Office

Land, Broken
Soil, 2d rate
Mountainous & timbered on
46.50 chains
~~End of Resurvey~~

From the per to Sec^s 28. 29. 32 & 33.
Chain ~~East on previous line~~ North last Sec^s 28 & 29.
Va 16° 35' E.

40.00 Set a quartzite 16×12×6, 11 in. in the ground for 1/4 Sec. cor. marked 1/4 S. on W. face and raised a mound of stone along side from which:
A pine 4 in dia. bears N 65° W. 18 lks dist.
" " 12 " " " N 69° E., 26 " "
Post marked 1/4 S. B. T.
50.00 Ridge bears N.E. & S.W.
61.86 A pine 14 in dia.
80.00 Set Sand stone 16×10×10, 11 in. in the ground, marked 2 notches on S. and Hon. E. edges, with stone mound along-

BOOK-A-186 162

Pickt for cor to Sec^s 20, 21, 28 & 29.

From which:

A pine 12 in dia. bears N. 65 W. 15 lks dist.
marked T. 3 N. R 12 E. 1st, B. T.

A pine 16 in dia bears N 80° E. 19 lks dist
marked T. 3 N. R 12 E. S. 21. B. T.

A pine 17 in dia bears N. 45° E. 25 lks dist.
marked T 3 N. R 12 E. S. 28 B. T.

Land heavy rolling;
Soil, 1st rate;
Timber pine & aspen on 80 chs.

East on random line bet Sec^s 21 & 28
Va 16° 35' E.

11.70 Spring branch 3 lks wide, 4 in deep, runs N.E.
12.70 A Patin bears S. 70 lks dist.
29.50 Road bears N.W. & S.E.
34.50 " " N.E. & S.W.
37.00 Spring branch 4 lks wide, 6 in deep, runs N.E.
Leave Timber

38.50 Wagon Road bears N.W. & S.E.

40.00 Set temp. 1/4 Sec. Cor.

47.75 Road bears N.W. & S.E.

50.00 Enter Timber

77.00 Leave Timber

81.75 Intersect N & S. lines, 94 lks N. of Cor. to Sec. 21. 22. 27 & 28, thence S. run N. 89° 20' W. on true line bet. Sec. 21 & 28 with Camp var.

260.87½ Set Sand stone 16×10×4, 11 ins in the ground marked 1/4 on N. face and raised a stone mound for 1/4 Sec Cor,
No Suitable bearing trees within distance,

81.75 The cor. to Sec. 20. 21. 28 & 29,
Land, rolling.
Soil, Loam.
Timber White pine & aspen over 6 ins,
August 20th 1884.

North bet Sec. 20 & 21,
Var 16° 35' E.

BOOK-A-186

40.00 Set quartzite stone 14×12×10, 9in. in the ground, on which ✠ on W. face, mound stone mound alongside, for ¼ Sec. cor. from which

A pine 10in dia bears N60°E. 3lks dist:
" " 9" " " S.70°W. 6 " "
both marked 1/4 S. B.T.

Set quartzite stone 12×7×6, 6in deep, marked 3 notches on S. and ✠ on E. edges, with stone mound alongside, for Cor to Sec's. 16. 17. 20 & 21. from which:

A pine 8in dia bears N10°E. 7lks dist: marked T.3 N. R 12 E. S. 21. B.T.
a pine 6in dia. bears S80°W 11lks dist. marked T.3 N. R 12 E. S. 20. B.T.
a pine 7in dia bears N.30°W. 11 lks dist: marked T 3 N. R 12 E. S. 17. B.T.
a pine 7in dia bears N. 20 E. 13 lks dist. marked T. 3 N., R 12 E. S 16 B.T.
Land Rolling;

Soil, Grade;
Timber, dense pine, and
Mountainous over 80 chs.

Eaton random line bet Secs 15 & 16
Ca 16° 35' E.

34.00 Road bears: N.W. & S.E.
40.00 Set Sand. 1/4 Sec. Cor.
49.50 Scarce Timber, enter flat. at spring 30 lks S.
61.80 Spring branch 10 lks wide 6 in deep, runs N.
76.75 Blackfoot Fork, 125 lks wide, 15 in deep runs N.W.
81.97 Quincunx N & S. line 23 lks W. of cor to Secs
15, 16, 21 & 22 Thence S. runs Same var.
S. 89° 50' W. on quincunx bet Secs 16 & 21,
40.98 Set a boulder 12 x 10 x 8, 8 in deep in the ground
marked 1/4 Cor N. faces, and raised a stone
mound along side, from which
A pine 6 in dia bears: N 80° W. 11 lks dist.
" " 26 " " " S. 15° W. 18 " "
Both marked 1/4 S. B. T.

BOOK-A-186

166

81.97. Thy con to Sec. 16. 17. 20 & 21.
Land taken,
Soil 2nd rate
Timber pine and aspen,
on 49.50 chs. —

80 chs.

Sec. P. 16 & 21

North bet. Secs. 16 & 17
On 16.35 E.

ing 30 lks S.
ns N.,
ons N. 80 W.
or to Sec.

19.00 Enter Decmt. Timber

40.00 Set quartzite 13×10×7, 9 in. in the ground, marked 1/4 on N. face, raised mound along side for 1/4 Sec cor, from which: A pine 16 in dia bears N 40° E. 10 lks dist.
" " 8 " " " S. 20 W. 7 " "
both marked 1/4 S. B.T.,

Sec. 21, in the ground, ed a stone

45.60 Intersect Utah and Wyoming Boundary line 13.75 chs W. of Mile Cor. No. 344, when Set a boulder 10×10×7, 6 in. in the ground, on which with a cross & C.C. (+CC) on S. face, and raised a stone

dist.
"

mound for cor to fractional Sec^t. 16 & 17
Land, mountainous, rolling,
Soil 2nd. rate
Timber, dry pine & windfalls
and mountainous over 45.60 chs.

North bnd. Sec^t. 31 & 32.
Var 6° 35' E.

From the cor to Sec^t. 31 and 32 on the S. boundary of the T^p, being a sand stone 17 x 17 x 4 ins firmly bdd in the ground, marked 5 Notches on E & W edges, from which:
A pine 14 in dia bears: N 50° E 32 lks dist marked T. 3 N. R. 1 E. S 32. B. T.
A pine 10 in dia bears: N 10° W. 30 lks dist. marked S. 6 B. T.
A pine 22 in dia bears: N. 60° E. 36 lks dist marked T. 2 N. R. 1 E. S. 5. B. T.
A pine 20 in dia bears: N 80° W. 10 lks dist marked S. 31. B. T.

BOOK-A-186

From Northst Dist 31 & 32,
N 16° 35' E.

6.50 Entr park beam N.E. & S.W.

9.50 Leave Dame

2.00 Spring branch (in hollow) 4 lks wide 6 in deep, runs S.E.

40.00 Set Sandstone 16 × 14 × 8. 11 in. in ground marked 1/4 on W. face, raised stone around along side for 1/4 Sec. cor. from which
A pine 20 in dia bears N 75° W. 34 lks dist.
" " 14 " " " East. 45 " "
Both marked 1/4 S. B. T.

80.00 Set Sandstone 20 × 15 × 8, 15 in. in ground, marked 1/4 Notch on S. & on E. edges, with stone mound along side for cor to Dist 29, 30, 31 & 32
from which
A pine 14 in dia bears N 45° E. 12 lks dist
Marked B. 3 T. R 2 E. S. 29, B. T.
A pine 14 in dia: bears N 25° E. 8 lks dist;
marked T. 3 N. R 2 E. S. 32. B. T.

o Dec. 16 & 17

alling,

& windfalls
60 chs.

32 on the S.
and stone
mound,
W. edges,
32 lks dist
B. T.
30 lks dist.
36 lks dist
T. T.
10 lks dist.

A pine 8 in dia bears N 60° W. 8 links distant marked T. 3 St. Bz C. Dec. 30, B. T.,
A pine 14 in dia bears N. 60° W. 4 links distant marked T. 3 St. Bz C Dec 31. B. T.
Land rolling, Mountainous.
Soil. Sandstone.
Timber dense pine on W. side.

East on random line but Dec. 29 & 32
Va 16° 30' E.

40.00 Left bank 1/4 dec. cor.
54.00 Ravine drains S.E.
59.75 Stake & mound.
63.00 Ravine drains S.
72.00 " "
80.00 Intersect N. & S. line 25 th N. of cor. Dec. 29. 30. 31 & 32 from which a pine N. 89° 45' W. on this line but Dec. 29 & 32 same variation.
40.00 Set Sandstone 20 x 16 x 12, 15 in deep, in the ground.

BOOK A-186

marked 1/4 on R. face and raised a stone mound alongside for 1/4 Sec cor. from which

A pine & India bears N 40° W. 23 lks dist.
A " 12 " " " S. 45° E 20 " "
Box marked 1/4 S. B.T.

80.00 Run on & Dec's 29. 30. 31 & 32.
Land rolling mountains,
Soil 2nd rate
Timber demolished on 80 chs.

West on random line set Dec's 30 & 31
Va 16. 35' E.

11.50 Enter Opening
13.50 Leave "
15.00 Enter "
17.00 Leave "
25.50 Enter "
26.00 Leave "
40.00 Set limb 1/4 Sec

46.00 Enter Opening
49.50 Leave "
63.00 Enter Park
65.00 Leave "
67.00 Spring branch 8 ins wide 4 ins deep runs N.
73.87 Intersect N. boundary of P. 87 Ch. S. of cor. to Sec. P. 30 & 31, which is a sandstone 12 x 12 x 3, 9 ins. in ground, marked 1 notch on S. and 5 on N. edges, raised a stone mound along side & bearing trees standing and opening with description furnished by offr. Thence Drive
S. 89° 23' E. on true line bet Sec. P. 30 & 31,
33.87 Set sandstone 10 x 9 x 6, 6 ins deep in ground marked 1/4 on N. face, raised a stone mound along side, for 1/4 Sec cor. from which a pine 10 ins dia bears N. 79° E. 2 lks dist,
" " 16 " " S. 45 W. 3 " "
both trees marked 1/4 B. T.
73.87 Thence to Sec P. 29, 30, 31 & 32,

BOOK A 286

172

Land rolling;
Soil 2d rate
Timber down prior on 73.89 chs
August 22d 1881

South bdy Sec 29 x 30
Ca 16.36

4.50 Enter Park
11.25 leave "
32.00 Track drains W.
40.00 Marked Stationary Sand Stone 18 x 14 x 6 ins above ground + 1/4, & raised stone mound along side, for 1/4 sec cor from which -
a pine 8 ins dia, bears West 13 lks dist -
a pine 22 ins dia, bs S. 65° E 12 lks dist -
Both marked 1/4 S. B.T.
76.50 Creek 20 lks wide - 10 ins deep in broad hollow runs S. E -

80.00 Set sandstone 12×12×5, 8 in in ground, marked 2 notches on S. & 5 on E. edges, & raised stone mound along side, for corner trees 19, 20, 29 & 30. from which a Pine 26 in dia, bears N. 40° E, 102 lks dist and T. 3. N. R. 12. E. S. 20. B.T. a Pine 6 in dia, bears N. 45° W. 30 lks dist and T. 3. N. R. 12. E. S. 20. B.T. No other trees within distance —

Land rolling. Soil 2d rate

Timber, dense pine, on 320 acres

East on random line between sections 20 & 29 —

Var 16° 35' E.

5.00 Creek 20 lks wide, 10 in deep, in hollow, runs N.E.

25.00 Ridge — N & S.

BOOK-A-186

40.00 Set temporary 1/4 Sec cor—

80.31 Intersect A & S. line 3.25 links North of cor to sec 20, 21, 28 & 29. from which—

N. 87° 40' W— on true line bet secs 20 & 29. with 4° east variation.

40.16 Set 3 quartstone 20 x 7 x 5, 15 in in ground, marked 1/4 on N. face & raised stone mound alongside, for 1/4 Sec cor— from which—

a Pine 8 in dia, bs N. 15° E. 16 links dist
a Pine 14 " " " N. 10° W. 10 " "
Both marked 1/4 S. B.T.

80.31 The cor to secs 19, 20, 29 & 30.
Land heavy rolling—
Soil 2d rate.
Timber, pine, fir, & aspen on 80.31 Chain.

8 in
notches
raised
for cor
from which—
102 lks dist.
S. B.T.
50 lks dist—
30. B.T.
same—
soil 2d rate
3.25 Chains—

to sec—

in deep.

West on random line bet secs 19 & 30.
Var 16° 35' E,

19.50 South end of dam.
40.00 Set temporary 1/4 sec cor.
42.00 Wash & runs S.E.
54.00 Enter park, mid springs -
72.00 Leave same -
74.16 Intersect N. Boundary of Gp -
Receipt Reestablished by me
282 links E. of corner to secs 19 & 30
which is a sandstone 18 x 14 x 8 -
firmly in ground, marked 2
notches on E. & 4 on N. edge
4 bearing trees standing, & agree
with description furnished by
office
Thence N. run -
S. 88° E. on true line
bet secs 19 & 30 - same variation -
34.16 Set sandstone 14 x 12 x 5, 9
in, in ground, marked 1/4 on N.

face, & raised stone mound
along side - for 1/4 sec cor -
from which
a Pine 7in dia, bears N. 55° W. 43 lks dist.
a Pine 7" " " N. 75° E. 12 " "
Both marked 1/4 S. B.C.

14.16 The cor to secs 19, 20, 29 & 30 -
Land rolling - Soil 2nd rate -
Timber, pine & spruce, mostly burnt
on last half mile.

North bet secs 19 & 20 -
Var 16° 35' E -

9.00 Ravine trains E
30.50 Wash " "
40.00 Set a mound stone 12 x 10 x 5, 8 in
in ground, marked 1/4 on N. face
& raised stone mound along side,
for 1/4 sec cor - from which -

a Red Pine, 12 in dia, bears N. 55° E. 13 lks dist—
a Red Pine 10 " " " N. 80° W. 18 " "
Both marked T. 4. B.T.

47.00 Spring branch 5 lks wide, 2 in deep
in hollow—runs E

60.00 Dry bed, in hollow, runs E—

63.00 Lean hollow—

80.00 Set sandstone 18 × 9 × 7— 12 in, in ground—
marked 3 notches on South, & E, on
E, edges— + raised stone mound
along side— for cor to secs 17, 18—
19 + 20— from which:—
a burnt pine 12 in dia, bears N. 10° E.
25 lks dist— marked T. 3. N. R. 12. E
S. 17, B.T.
a pine 12 in dia, bears S. 70° E. 15
lks dist, marked T. 3. N. R. 12. E.
S. 20, B.T.
a pine 10 in dia, bears S. 50° W.
6 lks dist marked T. 3. N. R. 12. E
S. 19, B.T.

13 lks dist -
8 " "
? in deep
-
, in ground
- 5, in
ground
17.18 -
n N.10°E.
N.R.12.E
E. 15
-R.12.E -
50° W -
12. E -

Land rolling - Soil 5th rate -
Timber - Pine & Spruce - on Blks -
Last 20 Chains - burnt.

East on random line bet secs 1 & 12
Var 16° 35' E.

35.30 N rest fine, 12 in dia -
37.80 Creek, 20 lks wide, 10 in deep
in hollow runs N.E.
46.00 Set temporary 1/4 sec cor -
49.00 North point of timber ridge -
51.00 Enter land
53.00 Wash drains N -
57.00 Leave land -
64.00 Ridge bears N. & S.
80.80 Intersect N & S. line, 104 links N -
of corner, from which -
N. 89° 15' W - on true line bet secs
1 & 12 -

40.40. Set boulder 14×10×10, 9 in deep— marked 1/4 on N. face, & raised stone mound alongside, for 1/4 sec. cor. Timber within distance, burnt—

80.80 The cor to secs 17, 18, 19 & 20, Land, rolling— Soil 2d-rate— mostly dry pine timber on 80.80 ch—

West on random line bet secs 18 & 19— Var 16° 35' E,

20.00, Hollow drains North—

40.00 Set temporary 1/4 sec cor—

74.06 Intersect N. boundary of T— 3 chains N. of corner to secs 18 & 19 (recently reestablished by me) which is a Standstone 20×16×8— 15 in deep, marked 3 notches on N— & E. edges— from which a pine 12 in. dia. bears S. 30° W. 350 links dist.— marked S. 24— T. 3 N. R. 11 E. 6. P.

from which Drum – N. 88° 17' 87° 52' E –
on true line bet secs 18 & 19 –

34.06 Set sandstone 11 x 10 x 7 – 7 in in ground
marked 1/4 on N. face, & raised stone
mound along side, for 1/4 sec cor –
Trees burnt within distance –

07.06 The cor to secs 17, 18, 19 & 20 –
Land rolling – Soil 5th rate – Timber
pine, mostly burnt –

North bet secs 17 & 18 –
Var 16° 35' E.

27.75 Dry gulch bears N. E,

40.00 Set Cobblestone 16 x 12 x 6, 11 in deep,
marked 1/4 on W face, & raised stone
mound alongside – for 1/4 sec cor.
Trees burnt, within distance –

46.22 Intersect Wyoming & Utah
boundary, 15.35 Chains west

of mile post 345. where I set a cobble stone 16×11×7- 7in in ground, marked + B.C. for closing corner to fractional sec 17 & 18.

Land rolling - Soil 3d rate - Timber - pine, mostly burnt -

August 23d. 1881.

General Description -

The additional lands surveyed in this Township, embrace some pine timber, mostly, yellow pine of an average diameter of 15 inches - There is also some fir, spruce, & aspen timber - The north & western portions, have suffered considerably by fire - & are full of windfalls.

N. D. Herron -
U. S. Deputy Surveyor -

BOOK-A-186

187

U. S. SURVEYOR GENERAL'S OFFICE,

Salt Lake City, Utah, Jan 25th 1882

The foregoing field notes of the survey ~~of the~~
and Resurvey of the
Subdivisions of
Township No 3 N. *Range No* 2 E.,
of the Salt Lake Meridian, Utah Territory,
Executed by A. D. Fenton
Under his *contract No* 105
of the 29 *day of* July 1881,
in the month of Aug. 1881,
having been critically examined, the necessary corrections and explanations made, the said field notes, and the surveys they describe are hereby approved.

Jno. Salsbury.

U. S. Surveyor General for Utah.

BOOK-A-180

(5)
R: 1882, 1882

Filed 187 .

Examined by John D. Campe

Compared by J. Linton & H. Gerlach

FIELD NOTES

OF

THE SURVEY OF THE

East Boundary

of Township No. 3 N., Range No. 13 E.

of the Salt Lake Meridian in Utah Territory.

BY

A. D. Farrow

U. S. DEPUTY SURVEYOR,

Under his Contract No. 105

dated July 29th 1881.

Survey commenced Aug. 19th 1881.

Survey completed Aug. 19th 1881.

186-5

Exterior T. 37 N. R. 13 E.

Chs From the cor. to Tps. 2 & 3 N. R. 12 & 13 E. Aug. 19. 1851.
being a granite 24 x 15 x 4 ins. 19 ins. in the ground marked 6 notches on N. & E. & W. edges, 3 bearing trees standing. Drum.
North bet. Secs. 31 & 36
Va. 16° 35' E.

24.00 Pond 2.00 Chs. diam.
40.00 Set quartzite 15 x 10 x 5 ins. 10 ins. in the ground, for 1/4 Sec. cor. mkd. 1/4 on W. face from which.
A pine, 8 ins. diam, bears East 3 lks. dist. -mkd. 1/4 S. B. T.
A pine, 12 ins. diam. bears West 30 lks. dist. -mkd. 1/4 S. B. T.

Exterior S. 3 M.

Chs.	
54.90	Spring branch, 7 lks. wide 6 ins. deep, runs E.
63.00	Spring branch 4 lks. wide, 4 ins. deep, runs E.
80.00	Set Sand Stone 16×10×5 ins. 11 ins. in the ground, for cor. to Sec. 25, 30, 31 and 36. mkd 5 notches on N. and 1 notch on S. edges, and raised a mound of stone alongside, Pits burnt. Land broken. Soil, 2nd rate. Timber, pine, partly burnt on 80.00 chains.

North bet. Sec. 25 & 30
Va. 16' 35' E.

BOOK-A-186

T. 3 N. R. 13 E. S.L.M.

		S.
7 ft. wide	40.00	Set a Sand Stone 11×10×6
E.		ins. 6 ins. in the ground,
ft. wide,		for 1/4 Sec. cor. mkd 1/4 on
E.		W. face, and raised a
×10×5 ins.		mound of Stone alongside.
d, for cor.	80.00	On E. edge of Pond,
1, Sec 36.		Set a Burned cedar post
N. and		4 feet long, 4 ins. Square
es, and		2 feet in the ground, for
of Stone		cor. to Secs. 19, 24, 25 and 30,
		marked
		T. 3 N. S. 19 on N.E.;
		R. 14 E. S. 30 on S.E.;
		R. 13 E. S. 24 on N.W.; and
ty burnt		S. 25 on S.W. faces, with
		4 notches on N. and 2 notches
		on S. edges, pits impracticable.
25 & 30		Land, very rugged
35' E.		Soil, 3rd rate.

Exterior T. 3

Lks. Timber, pine.
80.00 Lks. our mountainous

North bet. Secs. 19 and
Va. 16 35 C.
40.00 Set quartzite 10×10×6
6 ins. in the ground, f
1/4 Sec. cor. mkd 1/4 on
faw, and raised a mo
of Stone alongside.
59.00 Ridge bears N.E. and S.
80.00 Set quartzite 16×10×6 i
11 ins. in the ground, fo
cor. to Secs. 13, 18, 19
24, mkd. 3-notches on
N. and S. edges and ra
a mound of Stone al
Land, very rugged.
Soil, 3rd rate.
Timber, pine.

BOOK-A-186

13 E S.L.M.

8 M. on Sec. on mountainous land.

North bet. Secs. 13 & 18
Va. 16° 35' E.

Set quartzite stone 16×10×7 ins., 11 ins. in the ground for 1/4 Sec. cor. - mkd 1/4 on W. face, and raised a mound of stone alongside. The calculated intersection with the Utah & Wyoming boundary line based upon connection with the nearest corners found East and West of this point,

Mile post No. 334 cannot be found. I have set a quartzite 10×10×9 ins. 6 ins. in the ground for closing corner

Exteriors T. 3 N. R. 13 E.

Sec. 6 fractional Sec. 13 & 18
mkd "G.C.", and 2 notches
on N and 4 notches on S.
edges, and raised a
mound of stone alongside.
Land, broken.
Soil, 3rd rate.
Timber, pine and fir.
48.80 chains over moun-
tainous land
August 19th 1881

Note: For General Description
see end of Subdivision Note
of this Twp.

A. A. Perron
U.S. Dep. Surveyor

BOOK-A-186 189

U. S. SURVEYOR GENERAL'S OFFICE,

Salt Lake City, Utah, Jan 25th, 1882

The foregoing field notes of the survey of the

East Boundary

Township No 3 N. *Range No* 13 E

of the Salt Lake Meridian, Utah Territory,

Executed by A. D. Perron

Under his *contract No* 105

of the 29 *day of* July 1881,

in the month of Aug. 1881,

having been critically examined, the necessary corrections and explanations made, the said field notes, and the surveys they describe are hereby approved.

Wm. Salisbury

U. S. Surveyor General for Utah.

BOOK-A-186
R: 1882

190

Filed 187 .

Examined by John W. Campe.

Compared by Absorbed H. Linton

FIELD NOTES

OF

THE SURVEY OF THE Subdivision Lines

of Fractional Township No. 3 N., Range No. 13 E.

of the Salt Lake Meridian in Utah Territory.

BY

A. L. Perrow

U. S. DEPUTY SURVEYOR,

Under his Contract No. 105

dated July 29. 1881.

Survey commenced Sept. 1st. 1881

Survey completed Sept. 6th 1881

186-6

BOOK-A-186

Township 3 N. R. 13 East

6	5	4	3	2	1
7	8	9	10	11	12
18 248	17 232	16 221	15 211	14 201	13 187
246	245	231	220	210	200
19 243	20 229	21 218	22 208	23 198	24 186
242	240	227	217	207	196
30 238	29 226	28 215	27 205	26 195	25 21
237	236	224	214	204	193
31 234	32 223	33 213	34 203	35 191	36 183

BOOK-A-186 195

Subdivision T. 3 N. R. 13 E.

Survey commenced
September 1st 1881

The instrument used is
Youngs Solar Transit #4901
examined and approved by
the office and tested pre-
vious to using on a meridian
obtained by an observation
of Polaris.

I commence at the cor.
to Sect. 35 and 36 on S. boundary
of the Township re-established
by me during this survey
from which I run
North bet. Sect. 35 and 36
Var. 16° 35' E.

40.00. Set quartzite 16 x 10 x 4 in. 11 in.
in the ground, for 1/4 Sec. cor.
marked 1/4 on W. face dug pits

Subdivisions T. 3 N. R. 1

Chs.		Chs.	
	18×18×12 ins. N. and S. of S		W.
	5½ ft. dist., and raised mound		N.
	of earth 1½ ft. high, 3½		L
	base, along side.		
	Timber around corner burn		T.
80.00	Set a Sandstone 15×10×5		8
	10 ins in the ground for cor.		
	to Sec 25, 26, 35 and 36, mar		
	with 1 notch on S., and 1 notch		
	on E. edge, from which		
	A pine, 12 ins diam, bears	13.50	
	45° E. 9 lks dist. marked T. 3	25.00	
	R. 1 3 E. Sec. 25 B.T.	29.00	
	A pine, 10 ins. diam., bears S. 6	33.00	
	E. 21 lks. dist. marked T. 3 N.	40.00	
	R. 1 3 E. Sec 36. B.T.	42.00	
	A pine 14 ins. diam., bears S. 4	46.00	
	W. 10 lks. dist. marked T. 3 N.	56.00	
	R. 1 3 E. S. 35 B.T.		
	A pine, 7 ins. diam., bears N. 6		

BOOK-A-186 193

R. 13 E. T. 2 L. M.

		W. 23 lks dist. marked T. 3 N., R. 13 E., S. 26. B.T.
		Land rolling.
		Soil 3rd rate
		Timber, pine, mostly burnt
		80.00 chains
		East on a random line bet. Sec. 25 and 36. Var. 16° 35' E.
	13.50	Ridge bears N. and S.
	25.00	Hollow drains N.
	29.00	Ridge bears N. and S.
	33.00	Enter marsh.
	40.00	Set temporary 1/4 Sec. cor.
	42.00	Leave marsh.
	46.00	Low ridges bear N. and S.
	56.00	Head of Spring branch 3 lks wide, 6 in. deep, runs S. E.

1914.

Sh. Subdivisions T. 3 N. R. 1

58.00 Enter marsh.

59.50 Previous Spring branch, run N. E.

63.00 Leave marsh.

80.40 Intersect E. boundary of township at cor. to Secs. 25 & 36. 30 links 40.00

31

Thence I run West on true line, bet. Secs 25 & 36 with same va.

40.20 Drove charred cedar post 5 ft. long 4 ins. square, 2 ft in the ground for 1/4 Sec. cor. marked 1/4 on N. face. Pits impracticable. No trees within distance. 80.00

80.40 The cor. to Secs. 25, 26, 35 & 36

Land, rolling.

Soil, rocky - 3rd rate

Timber - scattering pine and

BOOK-A-186 195

R. 13 E. S.L.M.

heavy windfalls.
80.40 chs. mountainous.

North bet. Secs. 25 and 26
Va. 16° 35' E.

10.00 Set quartzite stone 16×8×7 ins. 11 ins. in the ground, for 1/4 Sec. cor. marked 1/4 on W. face dug pits 18×18×12 ins. N. and S. of stone 5 1/2 ft. dist., and raised a ground of earth 1 1/2 ft. high 3 1/2 feet base, along side
Trees within distance all burnt.

8.00 Set quartzite stone 14×11×4 ins. 9 ins. in the ground for cor. to Secs. 23, 24, 25 & 26 Marked with 2 notches on S. and 1 notch on E. edges

196

Subdivisions T. 3 N. R.

chs		chs.
	dug pits 18×18×12 ins. at each sec., 5 1/2 ft. dist. and	1800
	raised a mound of earth	80.20
	2 ft high, 4 1/2 ft. base, along	
	Run within distance all	
	burnt.	
	Land- rolling.	
	Soil- 2nd rate.	
	Timber- burnt- pine on 80 ch	
		40.10
	East on random line bet.	
	Secs 24 & 25	
	Var. 16° 35' E.	
40.00	Set temporary 1/4 Sec. cor.	
48.00	Ridge bears N.E. & S.W.	
54.00	Spring- marsh	
59.00	Leave Sand	
70.00	Small lake, bears N. 10 chs and	
	S. 10.00 chains.	
74.00	Across lake	

BOOK-A-186 197
R. 13 E. S. L. M.

Chs.		
7 8.00	Swamp.	
80.20	Intersect E. boundary of Tp. 29 Nth. N of cor. to sec. 24 & 25, established by me on this survey	4 chs 35 links E
	Thence I run N. 89° 48' W. on astron. line, bet. sec. 24 & 25, with 1 cord 1 cam va.	1 cord W.
40.10	Set quartzite stone 12 x 8 x 7 ins. 9 ins. in the ground, for 1/4 sec. cor., marked 1/4 on N. face, and raised a mound of stone along side from which A pine 10 ins diam. bears S. 50° W. 9 links dist. marked 1/4 S. B.T.	12 x 8 ins. 1/4 on W. a mound 4 cubic links
	A pine, 9 ins. diam, bears N. 52° W. 8 links dist. marked 1/4 S. B. T.	12 x 8 ins. for 1/4 sec. 35 S. and

Subdivisions T. 3 N.

Chs.	
80.00	The cor. to Secs. 23, 24, 25 & 26
	Land - broken ridges
	Soil - 3rd rate
	Timber, Pine & Fir - partly
	burnt over 80.00 chains.
	North bet. Secs. 23 & 26
	Va. 16" 35 L.
2.50	Enter park bears N. E.
1.50	Lead Same
40.00	Set quartzite stone 14 x 9 x 5 ins.
	9 ins. in the ground for 1/4
	Sec. cor., marked 1/4 on W. face
	and raised a mound of stone
	along side, from which
	A pine, 6 ins. diam., bears N.
	50° W. 5 lks dist. marked 1/4 S. B. T.
	A pine, 12 ins. diam., bears
	N. 89° E. 25 lks dist. marked 1/4 S. B. T.

BOOK-A-186

R. 13 E. 19 S.L. M.

Ch.	
80.00	Set quartzite stone 12×8×6 ins. 8 ins in the ground, for cor. to Sec. 13, 14, 23 and 24 marked 3 notches on S. and 1 notch on East edges. and raised a mound of stone alongside, from which A pine, 6 ins. diam. bears N. 60° W. 2 links, dist. marked T. 3 N. R. 13 E. S. 14 B.T. A pine 5 ins. diam, bears N. 10° E. 16 lks. dist, marked T. 3 N. R. 13 E. S. 13. B.T. A pine 14 ins. diam, bears S. 12° E. 13 lks. dist. marked T. 3 N. R. 13 E. S. 24 B.T. Land, nearly level. Soil, 1st rate. Timber, mostly small pine and 80.00 chains.

Subdivisions T. 37 N. R.

Chs.		Chs.
	East on a random line bet. Secs. 13 & 24	
	Var. 16° 35' E.	
9.80	Gulch drains N. E.	
4 a.00	Set temporary 1/4 Sec. cor.	
4 3.00	Enter N. part of meadow bears S. 1/2 mile.	
4 8.50	Lead Same.	
6 a.00	At cond.	80.2
80.28	Intersect E. boundary of T. 32 N. R. 5 E. of cor. to Secs 13 & 24 Established by me during this Survey from which,	
	I run	
	S. 89° 46' W. on random line bet. Secs. 13 & 24 with Same va.	40.0
40.14	Set quartzite stone 13 x 8 x 5 ins 9 ins. in the ground for 1/4 Sec. cor, Marked 1/4 on N. face.	

BOOK-A-186

R. 13 E. 2d S. L. M.

Chs. and raised a mound of stone
along side, from which
A pine 20 ins. diam. bears
S. 10° W. 9 links dist. marked
1/4 S. B. T.
A pine, 5 ins. diam. bears N.
60° E. 18 links dist, marked
1/4 S. B. T.

80.28 The cor. to Secs. 13, 14, 23 and 24.
Land, rolling.
Soil 1st rate.
Timber, mostly small
pine on 80.28 chains.

North bet. Secs. 13 and 14
Var. 16° 35' E.

40.00 Set quartzite stone 10x10x6
ins, 6 ins in the ground
for 1/4 Sec. cor, marked 1/4 on
W. face, and raised a mound of

Subdivisions T. 3 N.

Chs	
48.75	Stone along side, The calculated intersection with boundary line bet. Utah and Wyoming Territories, falls in burnt timber, therefore mile post 46 335 cannot be found. I there set quartzite stone 10x9x7 ins, 6 ins, in the ground, for "C.C." to frac. sect 13 and 14, marked with "+" and "C.C." and raised a mound of stone alongside, Land, nearly level, Soil, 1st rate Timber, partly burnt on 48.75 chains. From the cor. to sect 34 and 35, on the South boundary of the Tp. re established by

BOOK-A-186

R 13 E. S. L. M.

Chs.	
	me during this Survey
	I run
	North bet. Sec. 24 & 25
	Va. 16" 35' E
17.50	Wash drains N.W.
25.00	Enter meadow
33.00	Wash drains N.W.
34.00	Spring branch, 8 lks. wide
	6 ins. deep, runs N.W.
40.00	Set Sandstone 18 x 9 x 8 ins
	12 ins. in the ground for
	1/4 Sec. cor. - marked 1/4 on
	W. face, and raised a mound
	of stone alongside.
75.44	Spring branch 8 lks. wide
	6 ins. deep, runs N.W.
80.00	Set Limestone 12 x 12 x 8 ins.
	8 ins. in the ground, for
	cor. to Sec. 26, 27, 24 & 25
	- marked 1 notch on S. and

Subdivisions T. 37 N.

Chs.	2 notches on E. edges, and raises a mound of stone alongside.
	Land, mostly level meadow.
	Soil, 1st rate.
	Timber - Pine on 25.00 chs.
	East on a random line bet. Secs. 26 and 35 Var. 16° 35' E.
20.50	Leave meadow.
40.00	Set temporary 1/4 Sec. cor.
80.14	Intersect N. and S. line 34 chs. S. of cor. to Secs. 25, 26, 35 and 36. from which Drum S. 89° 45' W. on true line bet. Secs 26 and 35 with true Var.
40.07	Set Sand Stone 18 x 14 x 6 ins. 24 ins. in the ground, for 1/4

3 N. R. 13 E. S. L. M.

	Chs.	Sec. cor. marked 1/4 on K. fire and raised a mound of stone alongside, from which A pine, 5 ins. diam. bears S. 7 5° W. 17 lks dist. marked 1/4 S. B. T.
	8 11.14	The cor. to Secs. 26. 27. 34 & 35 Land, nearly level. Soil, 2nd rate. Timber, mostly burnt pine September 1st 1881
		North bet. Secs. 26 and 27 Va 16° 35' E.
	37.50	Leave meadow.
	40.00	Set Sand Stone 14 x 11 x 5 ins 9 ins. in the ground for 1/4 Sec. cor. marked 1/4 on W. fire dug pits 18 x 18 x 12 ins. N. and S. of stone 5 1/2 ft. dist. and

Subdivision of 3 N.

Std. raised a mound of earth 1 1/2 ft. high, 3 1/2 ft. base along side. from which
A pine 14 ins. diam. bears E. 3 links dist. marked 1/4 S.B.T.

45.00 Enter meadow.

61.25 Leave land.

70.50 Walk drains N.E.

77.50 Spring branch 1 2 lks wide 10 ins. deep, runs N.E.

80.00 Set sandstone 2 ft x 10 x 8 ins. 15 ins. in the ground. for cor. to Secs. 22, 23, 26 and 27, marked 2 Notches on S. and 2 on E. edges. and raised a mound of stone along side.
Trees around cor. brunt.
Land, maryland.
Soil, 1st rate
Timber, few pine partly burnt.

R. 13 E. T. 2 S. L. M.

Chs.	
	East on a random line bet. Secs. 23 & 26 Va. 16° 35' E.
4.25	Spring branch, 2 links wide 10 ins. deep, runs N. E.
7.00	Enter meadow
13.00	Leave "
41.00	Set temporary 1/4 Sec. cor.
80.00	Intersect N. & S. line 5 links N of cor. to Secs 23, 24, 25 & 26, from which I run N 89° 37' W. on a true line bet. Secs 23 & 26, with Same Va
40.00	Set quartzite stone 16 x 11 x 13 ins. 10 ins. in the ground, for 1/4 Sec. cor. marked 1/4 on N face and raised a mound of stone alongside. from which A pine 3 ins. diam, bears

Subdivisions T. 3 N.

Chs.	N. 70° E. 12 lks dist.-marked 1/4 S. B. T. A pine 12 ins. diam. bears S. 1 W 4 5 lks. dist.-marked 1/4 S. B. T.
80.00	The cor. to Secs. 22. 23. 26 & 27 Land, rolling Soil, 1st rate Timber, Pine, considerably burnt on 74.00 chains.
	North bet. Secs. 22 & 23 Var. 16° 35' E
40.00	Set Sandstone 18 x 9 x 4 ins. 12 ins. in the ground, for 1/4 Sec. cor.-marked 1/4 on W. face, and raised a mound of stone along side, from which A pine 8 ins. diam. bears S. 60° E. 28 lks. dist.-marked

R 13 E. 2nd S.L.M.

Mds. 1/4 S. B. T.
A pine 5 ins. diam, bears
S. 65° W. 8 lks. dist. - marked
1/4 S. B. T.

80.00 Set sand stone 12 x 10 x 6 ins.
8 ins. in the ground, for cor.
to Secs. 14. 15. 22 and 23, mkd
3 notches on S. and 2 notches
on E. edges from which
A pine, 14 ins. diam, bears
S. 35° W. 35 links dist. - mkd
T. 3 N. R. 13 E. S. 22 B. T.
A pine 6 ins. diam, bears
S. 12° E. 3 links dist. mkd. T.
3 N. R. 13 E. S. 23 B. T.
A pine, 14 ins. diam bears N.
30° W. 17 links dist. - Marked
T. 3 N. R. 13 E. S. 15 B. T.
A pine 4 ins. diam. bears N.
54° E. 19 links dist. - marked T. 3

Subdivisions T. 3 N.

Chs.	
	N. R. 13 E. S. 14 B. P.
	Land, rolling.
	Soil, 3rd rate
	Timber, Pine and fir on
	80.00 chains.
	East on a random line
	bet. Secs. 14 & 23
	Va. 16° 35' E.
76.00	Descend.
39.10	Spring branch 15 links wide
	8 ins. deep, runs N.E. at end.
34.00	Enter Table-mountain
49.16	Set temporary 1/4 Sec. cor.
80.17	Intersect N & S. line 41 lks
	N. of cor. to Secs. 13. 14. 23 & 24
	from which Drum,
	N. 89° 42' W. on a true
	line bet. Secs. 14 & 23 with
	same va

R. 13 E. S. L. M.

Chs.	
40.08	Set quartzite stone 12×10×5 ins. 8 ins. in the ground, for 1/4 Sec. cor. marked 1/4 on N. face. from which A pine 10 ins. diam, bears S. 60° W. 7 lks dist. marked 1/4 B.T. A pine 9 ins. diam, bears N. 65° E. 5 links dist, marked 1/4 B. T.
80.17	The cor. to Secs. 14, 15, 22 & 23. Land, mostly level, Soil 1st and 3rd rate. Timber, dense pine on 80.17 chains.
	North bet. Secs. 14 and 15 Var 16° 35' E.
40.00	Set Sandstone 32×18×4 ins 20 ins in the ground, for 1/4

Subdivisions T. 3 N.

		Sec. cor. marked 1/4 on W. face
		from which
		A pine, 8 ins. diam, bears
		N. 25° E. 6 lks dist, marked
		1/4 S. B. T.
		A pine, 6 ins. diam, bears S. 45°
		W. 25 lks dist, marked 1/4 S. B. T.
	48.70	The calculated intersection with
2	"	line, the mile post N° 336
3		cannot be found. Here I set
		a sandstone 18×7×5 ins 12
3		ins. in the ground, for closing
4		corner to fractional Sect. 14 T 15
80		marked C. with + and C. C. and
		raised a mound of stone along
		Land, rolling
		Soil, 2-nd rate
		Timber, pine, 48.70 chains
		over mountains.

BOOK-A-186

R. 13 E. S.L.M.

W. face	Chs.	From the cor. to Secs. 33 & 34 on South boundary of Twp. reestablished by me during this Survey, I run North bet. Secs 33 & 34 Var. 16° 35' E.
cart ked		
S. 45°		
B.T.	40.00	Set Sandstone 12 x 10 x 5 ins 8 ins. in the ground, for 1/4 Sec. cor. marked 1/4 on W. face and raised a mound of stone alongside
ion with boundary		Tree around cor. burnt.
36		
I Set		
ins 12		
or closing	80.00	Set Sandstone 20 x 12 x 3 ins. 15 ins. in the ground for cor. to Secs. 27. 28. 33 & 34, marked 1 notch on S. and 3 notches on E. edges and raised a mound of stone alongside
E. 14.15		
E. and		
ine along		
Chains		Tree around cor. burnt.

Subdivisions T. 3 N.

Chs.	
	Land, rolling
	Soil, 2nd rate.
	Timber, pine, mostly burnt,
	on 80.00 chains.
	East on a random line
	bet. Sect. 27 and 34
	Var. 16° 35' E.
40.00	Set temporary 1/4 Sec. cor.
51.50	Enter meadow.
66.00	Creek 12 lks wide 10 ins deep
	runs N.
79.25	Intersect N. and S. line at cor
	to Sect. 26, 27, 34 and 35
	from which I run
	West on a true line bet.
	Sect. 27 and 34 with same
	Va.
39.62	Set sandstone 15 x 14 x 3 ins
	10 ins. in the ground, for 1/4

3 N

R. 13 E. S.L.M.

burnt,

down line

35' E.

Sec. cor.

mis dish.

e at cor

35

ine bet.

same

1 × 3 ins.

for 1/4

Ch.	Sec. cor., marked 1/4 on N. face
	from which
	A pine 5 ins. diam. bears S.
	45° E. 9 links dist. marked 1/4
	S. B.T.
	A pine 14 ins. diam, bears N.
	45° E. 37 links dist, marked
	1/4 S. B.T.
79.25	Pits cor. to Sec. 27. 28. 33 and 34
	Land, rolling.
	Soil, 2nd rate.
	Timber, pine and fir on
	51.50 chains
	North bet. Sec. 27 and 28
	Va. 16° 35' E.
40.00	Set Sandstone 28×14×3 ins.
	20 ins. in the ground, for
	1/4 Sec. cor. marked 1/4 on N.
	face, and raised a mound

Subdivision P. 3 76

Chs.	
	of stone alongside
	Timber around cor. burnt.
55.00	Spring branch 6 lks. wide
	4 ins. deep, runs N.W.
72.40	Spring branch 2 lks. wide
	3 ins. deep, runs N.E. head
	S.E.
79.80	Spring branch 4 lks. wide
	4 ins. deep, runs S.W.
80.00	Set Sandstone 16 x 10 x 6 ins
	11 ins. in the ground, for cor
	to Sec. 21. 22. 27 & 28,
	Marked 2 notches on S. and
	3 notches on E. edges and
	raised a mound of stone
	alongside.
	Land, rolling.
	Soil, 2nd rate.
	Timber, pine, mostly burnt
80.00	Chains over Mountains.

BOOK-A-186
BOOK-A-186

R 13 E. 27 L. L. Mo

Ms.	East on a random line bet. Secs 22 and 27 Va. 16° 35' E.
41.00	Set temporary 1/4 Sec. cor.
79.35	Intersect N. & S. line 22 Mi. N. of cor. to Secs 22, 23, 26 & 27, from which I run N. 89° 51' W. on a true line bet. Secs 22 and 27, with bans Va.
39.68	Set quartzite Stone 20 x 12 x 6 ins, 15 ins. in the ground for 1/4 Sec. cor. marked 1/4 on N. face, and raised a mound of Stone alongside.
79.35	The cor to Secs 21. 22. 27 and 28, Land rolling Soil, 2nd rate Timber, Pine, all burnt

218

Subdivisions T. 3 N.

Chs. on 79.35 chains.
September 2nd 1881

North bet. 21 & 22
Va 16" 35' E.

7.50 Spring branch, 6 lks wide, 4 in. deep, runs N.W.

15.00 Spring branch 4 lks. wide 4 in. deep, runs N.W.

29.00 Enter Prairie.

38.50 Leave same

40.00 Set Sandstone 16 x 10 x 4 ins. 11 ins. in the ground for 1/4 Sec. cor. marked 1/4 on W. face from which

A pine, 14 ins. diam. bears S. 60° E. 10 lks dist. mkd. 1/4 S. B. T.

A pine, 14 ins. diam. bears N. 65° W. 25 lks. dist. marked 1/4 S. B. T.

DUVA-A-100

T 16 R. 13 E. S.L.M.

Ind. 80.00

Set quartzite 15 x 10 x 6 ins. 10 ins. in the ground for cor. to Sec. 15, 16, 21 and 22 marked 3 notches on S. and E. edges from which A pine 16 ins. diam, bears S. 18° W. 8 lks. dist. - marked T. 3 N. R. 13 E. S. 21 B.T. A pine, 8 ins. diam, bears S. 35° E. 7 links dist. marked T. 3 N. R. 13 E. S. 22 B.T. A pine 8 ins. diam. bears N. 80° E. 8 lks. dist. marked T. 3 N. R. 13 E. S. 15 B.T. A pine, 14 ins. diam, bears N. 45° W. 19 links dist, marked T. 3 N, R. 13 E. S. 16. B.T. Land, rolling. Soil, 2nd rate. Timber, Pine & Aspen on 80 ac. M.

...1881

...3 S 6 E.
...e with,
...p.
...e. with
...h.

...x 4 ins.
...for 1/4
...W. from

...S. beard
...S.B.T.
...beare
...marked

320

Subdivisions T 3 N.

Chs. Eathon a random line bet. Secs. 15 and 22
Va. 16° E. 56

4.00 Hollow drains N.
20.75 Spring branch 8 lks wide 6 ins. deep runs N.W.
40.00 Set temporary 1/4 Sec. cor.
79.84 Intersect N. and S. line at cor. to Secs. 14. 15. 22 and 23 from which I run
West on true line, bet. Secs. 15 and 22 with same Va
39.92 Set Sandstone 24 x 12 x 6 ins 18 ins in the ground for 1/4 Sec. cor. marked 1/4 on N. face from which
N. pine 8 ins. diam. bears N. 30° W. 10 links dist. marked 1/4 S. B. T.

3 N. R. 13 E. 3 P. M.

	Chs.	
and line		A pine, 14 ins. diam, bears S. 60° W. 1/4 links dist, marked 1/4 S.B.P.
35 E.		
5.	79.84	The cor. to Secs. 15, 16, 21 & 22
le wide		Land, rolling Soil, 3rd rate, Timber, pine on 79.84 chs.
Sec. cor.		
line at and 23		North bet. Secs. 15 and 16 Va. 16° 35' E.
e, bet.	19.00	East edge of small pond
the same	27.00	A pond 2.50 chains West.
	28.00	South edge of pond.
4x12x6 ins	32.50	North edge of pond.
for 1/4	40.00	Set quartzite stone 14x10. 4 ins, grs. ins the groove for 1/4 Sec. cor. marked 1/4 on W. face from which A ash 5 ins. diam bears S. 80° W. 2 links dist, marked 1/4
on N.		
bears N.		
marked		

Subdivisions T. 3 N.

Chs.	S. B. P.
	An aspen 6 ins. diam, bears S. 85° E. 2 lks. dist. marked 1/4 S. B. P.
46.75	Spring branch 8 lks. wide 6 ins. deep, ~~in~~ hollow, runs N.
48.65	The calculated intersection with the Utah and Wyoming boundary line. Mile post No 337 cannot be found, here I set quartzite 10 x 10 x 6 ins. 6 ins. in the ground for closing corner to fractional Sec. 15 and 16 marked with + and C. C. and raised a mound of stone alongside
	Land, rolling.
	Soil, 2nd rate.
	Timber, Aspen pine on 48.65 chains.

BOOK-A-186

T. 3 N. R. 13 E. S. L. M.

	Chs.	From the corner to Secs 32 & 33 on the South boundary of twp, reestablished by me during this Survey
		Run North bet Secs 32 & 33 W. 16° 35' E.
	40,00	Set Boulder Stone 16 x 12 x 8 ins. 11 ins. in the ground for 1/4 Sec. cor. marked 1/4 on W. face, from which A pine 14 ins diam, bears S. 2 E. 15 links dist, marked 1/4 S.B.T.
		A pine, 6 ins. diam, bears N 85° W. 14 links dist. marked 1/4 S.B.T.
	77.50	A Spring branch 10 links wide 4 ins. deep, runs N.E.
	80,00	Set Sandstone. 22 x 8 x 6 ins

n, bears
arked

e. wide
y runs

tion with
ig boundary
37 cain.
Sq mart-
rs. in
corner
and 16
E. and
ons along

65 chains.

Subdivisions T. 3 N.

Chs.	
	15 mis. in the ground, for cor. to Sec. 28, 29, 32 and 33 marked 1 notches on S. and W. notches on E. edge, and raised a mound of stone, along side from which
	A pine 24 ins. diam. bears N. 35° E. 17 links dist. mks. T. 3 N. R. 36 E. S. 28 B. T.
	No other trees within limits.
	Land, rolling
	Soil, 2nd rate.
	Timber, pine on 80.00 chs.
	East on a random line bet. Sec. 28 and 33 Va 16" 35' E.
1.25	Creek 13 lks. wide 6 ins. deep, runs N. E.
18,80	Road bears N. and S.

3 N. R. 13 E. S. L. M.

27.20	Creek 10 lks. wide, 6 ins. deep, runs N.
30.50	Smiths Fork 15 lks. wide 10 ins. deep, runs N.
40.00	Set temporary 1/4 Sec. cor.
80.46	Intersect N and S. line abov. to Sec 27. 28. 33 and 34 from which Drain W. on a true line bet. Sec 28 and 33, with dam Va.
40.73	Set quartzite 12 x 8 x 7 ins. 8 ins. in the ground, for 1/4 Sec. cor. - marked 1/4 on N. face from which A pine 10 ins. drains, bears N. 20° W. 13 lks. dist, mkd. 1/4 S. B. T. A pine, 6 ins. drains. bears S. 80° E. 17 lks dist, marked 1/4 S. B. T.

Subdivisional T. 3 N.

chs.	
80.46	The cor. to secs. 28, 29, 32 and 33,
	Land, rolling.
	Soil, 2nd rate.
	Timber, pine on 80.46 chains
	North bet. secs 28 & 29. Va. 16° 35' E.
9.25	Wood road bears E. & W.
	Carters Saw Mill bears E.
	25.00 chains dist.
11.11	Set Boulder Stone 16 x 10 x 8 ins. 11 ins. in the ground, for 1/4 Sec. cor. marked 1/4 on W. face from which
	A pine 10 ins. diam, bears N. 80° W. 9 lks. dist. mkd. 1/4 B.T.
	A pine 12 ins. diam. bears S. 40° E. 7 lks. dist. marked 1/4 S. B. T.

T. 3 N. R. 13 E. S. L. M.

29.32	Chs. 80.00	Set Cobble Stone 14×8×6 ins. 9 ins. in the ground, for cor. to Secs. 20. 21. 28 & 29 marked 2 notches on S. and 4 notches on E. edges, and raised a mound of stone alongside from which a pine, 12 ins. diam, bears N. 85° E. 30 links dist, mks. T. 3 N. R. 13 E. S. 21 B.T. other trees too small for marking.
chains		
& 29.		
5° E.		
W.		
ars E.		
10 × 8 ins.		
for 1/4		
n W. fm		
bears		
mks. 1/4 B.T.		
ins. bears		
arked		
		Land, rolling
		Soil, 2nd rate.
		Timber, pine and aspen
		on 80.00 chains.
		Each on a random line
		bet. Secs. 21 & 28
		Va. 16" 35° E.

Subdivisions T. 3 N.

chs.	
5.00	Leave timber.
7.00	Wagon road bears N. & S.
7.50	Enter timber.
15.00	Smiths Fork 25 links wide 12 lks. deep, runs N.W.
33.50	Spring branch 7 lks. wide 6 lks. deep runs N.W.
40.00	Set temporary 1/4 Sec. cor.
61.80	Spring branch 7 lks. wide 5 lks. deep, runs N.W.
80.38	Intersect N. & S. line 19 lks. E. of cor. to Secs. 21. 22. 27 & 28, from which Drums. S. 89° 52' W. on State line, bet. Secs 21 & 28 with same va.
40.19	Set Sandstone 13 x 10 x 5 ins. 8 ins. in the ground, for 1/4 Sec. cor. - marked 1/4 on N. face, from which

T. 16 R. 13 E. S. L. M.

Chs.	A pine, 12 ins. diam., bears N. 50° W. 32 lks. dist. mkd. 1/4 S. B. T.
	A pine, 6 ins. diam., bears S. 50° E. 40 lks. dist. mkd. 1/4 S. B. T.
80.38	The cor. to secs. 20, 21, 28 and 29.
	Land, rolling.
	Soil, 2nd rate.
	Timber, Pine on 79.88 chs.
	September 3rd 1881
	North bet. secs 20 & 21 Va. 16° 35' E.
7.50	Enters marsh.
15.00	Leave same.
40.00	Set Boulder Stone 14 x 11 x 8 ins. qnis. in the ground for 1/4 sec. cor. Marked 1/4 on

Subdivisions T. 3 N.

Sec.	W. face, from which Ash 48 ins. diam, bears S. 3 W. 16 lks. dist. mkd. 1/4 S.B.P. Ash pine, 6 ins. diam, bears S. 2 E. 25 lks. dist. mkd 1/4 S.B.P.
80.00	Set quartzite 16×8×14 ins. 11 ins. in the ground, for Cor. to secs 16. 17. 20 and 21, mkd. 3 notches on S. and 4 notches on E. edges, and raised a mound of stone alongside. from which Ash pine, 20 ins. diam, bears S. 15° W. 10 lks. dist-marked P. 3 N. R. 13 E. S. 20 B.P. Ash pine, 13 ins. diam, bears N. 60° E. 25 lks. dist, marked T. 3 N. R. 13 E. S. 16 B.P.

LOOK-A-186 93

3 N. R. 13 E. S. L. M.

	Chs.	
w,		A pine 10 ins. diam, bears
it. mkd.		N 50° W. 27 lks. dist. mks
		T. 3 N. R. 13 E. S. 17 B.T.
		Land, rolling.
bears		Soil, 1st rate.
mkd		Timber, Pine and aspen
		underwood, 80.00 chains.
ik, 11		
r cor.		East on a random line
-1, mkd.		bet. Secs 16 and 21
ut notches		Va 16' 35' E.
ed as	14.50	Road bears N and S.
gate.	19.50	Smith's Fork 20 lks wide,
		12 ins. deep runs N.
bears	40.00	Set temporary 1/4 Sec. cor.
rked T.	59.00	Enter prairie.
T.	76.00	Leave Land
, bears	79.25	Intersect N. and S. line. 81
marked		lks. S. of cor. to Secs. 15, 16,
B.T.		21 and 22, from which a tree

Subdivisions T. 3 N.

Chs.	S. 89° 25' W. on true line bet. secs 16 and 21, with same Va.
39.63	A pine, tree 14 ins. diam, which S. mark 1/4 S. on N face, for 1/4 sec. cor. from which A pine 13 ins. diam, bears N. 5° W. 25 links dist, mks 1/4 S. B. T. A pine 15 ins. diam. bears S. 10° E. 19 lks. dist. marked 1/4 S. B. T.
79.25	The cor. to secs. 16, 17, 20 and 21 Land, rolling. Soil, 1st rate. Timber, Pine and aspen underwood on 79.25 chs.

North bet. secs. 16 and 17
Va. 16° 35' E.

ECCR-A-186

R. 13 E. S. L. M.

Set

40.00 Set Cobble Stone 14 x 9 x 6 ins.
9 ins. in the ground for 1/4
Sec. cor. marked 1/4 on W.
face, from which
A pine 8 ins. diam. bears
N. 70° W. 8 lks. dist. marked
1/4 S. B. T.
A pine 7 ins. diam, bears
S. 29° E. 2 lks. dist. marked
1/4 S. B. T.

48.60 The calculated intersection
with the Utah and Wyoming
boundary line, mile post
No 338 cannot be found.
Here I mark a pine 12 ins.
diam., for closing cor. to Fractional Sec. 16 and 17, marked
with + and C. C. and raised
a mound of stone along-
side

Subdivisions T. 3 N.

Ch. Land, rolling.
Soil, 2nd rate.
Timber, Pine and aspen
48.60 chains.

From cor. to Sec. 31 & 32
on the South boundary of
twp. re-established by me on
this Survey I run.
North bet. Sec. 31 & 32
Va 16° 35' E.

40.00 Set Sand Stone 12 x 8 x 6 ins.
8 ins. in the ground, for 1/4
Sec. cor. marked 1/4 on W.
face, from which
A pine 16 ins. diam. bears N.
75° W. 20 links dist. marked
1/4 S. B. T.
A pine 12 ins. diam, bears
S. 70° E. 24 links dist. mkd

BOOK-A-186

T. 3 N. R. 13 E. S. L. M.

	Cor. 1/4 S. B. T.
	80.00 Set Sandstone 18×10×5 ins. 12 ins. in the ground, for cor to Sec. 29. 30. 31 & 32, mkd 1 notch on S. & 5 notches on E. edges from which A pine 8 ins. diam. bears N. 50° W. 11 links dist. mkd. T. 3 N. R. 13 E. S. 30 B. T.
hes on	
31 & 32	
dary of	
nes on	
1 & 32	A pine, 10 ins. diam. bears
5' E.	S. 85° W. 11 lks. dist. marked
6 ins.	T. 3 N. R. 13 E. S. 31 B. T.
for 1/4	A pine, 8 ins diam, bears
on W.	S. 45° E. 6 links dist. marked
	T. 3 N. R. 13 E. S. 32 B. T.
bears N.	A pine, 10 ins. diam. bears
', marked	N. 80° E. 17 links dist, mkd
	T. 3 N. R. 13 E. S. 29 B. T.
in, bears	Land, rolling.
dist. mkd	Soil, 2nd rate.

Subdivisions T. 3 N.

Ch. Timber, Pine and aspen on 80.00 chains.

East on a random line bet. Sect. 29 & 32
Va 16° 35' E.

40,00 Set temporary 1/4 Sec. cor.
55.00 Enter park.
61.00 Old road bears N.E. & S.W.
62.50 Leave park.
80.14 Intersect N. & S. line 10 links S. of cor. to Sect. 28. 29. 32 & 33 from which I run
S. 89° 56' W. on true line bet. Sect. 29 & 32, with same Va.
40.07 Set sand stone 12 x 8 x 6 ins. 8 ins. in the ground for 1/4 Sec. cor. marked 1/4 on N. face from which

3 N. R. 13 E. S. L. M.

	A pine, 10 ins. diam. bears N. 15° E. 31 links dist., mkd 1/4 S.B.T.
	A pine, 12 ins. diam. bears S. 12° E. 51 lks. dist. marked 1/4 S. B.T.
80.14	The cor. to Secs 29. 30. 31 & 32
	Land, rolling
	Soil, 2nd rate
	Timber, Pine and fir on
	80.14 Chains.
	West on a random line bet. Secs 30 and 31
	N. 16° 35' E.
40.00	Set temporary 1/4 Sec. cor.
78.64	Intersect West boundary of the Pp. at cor. to Secs. 30 and 31 from which a pine 6 ins. diam. bears N. 60° E. 25 links dist.
	East on a true line,

Subdivisions T. 3 N.

Chs.	bet. Secs. 30 and 31, with same W.
38.64	Set Sandstone 12 x 8 x 6 ins. 8 ins. in the ground, for 1/4 Sec. cor. Marked 1/4 on N. face from which A pine 6 ins. diam, bears N. 70° W. 20 links dist. - mkd. - 1/4 S. B. T. A pine, 12 ins. diam, bears S. 70° E. 24 links dist. - mkd 1/4 S. B. T.
78.64	The cor. to Secs 29. 30. 31 & 32 Land, rolling Soil, 2nd rate. Timber, Pine and fir on 78.64 chains.
	North bet. Secs 29 and 30 W. 16° 35' E.

3 N.

ith Sand

x 6 ins.
or 11 L
N. face

bears
-mkd.

bears
-mkd

3 / 4d 32

-w

, and 30
E.

Ch. A. 186 Ch. 229

N. 13 E. 2d P.M.

40.00 Set Boulder Stone 16 x 10 x 4 ins. 11 ins. in the ground, for 1/4 Sec. cor. marked 1/4 on N. face, from which A pine, 30 ins. diam. bears N. 5° W. 12 links dist. marked 1/4 S.B.T.

— — A pine, 5 ins. diam. bears N 50° E. 27 links dist. mkd. 1/4 S.B.T.

42.24 A pine 18 ins. diameter.

80.00 Set Boulder Stone 10 x 10 x 6 ins. 6 ins in the ground, for cor. to Sec 19. 20. 29 and 30. marked 2 notches on on E. and 5 on E. edges and raised a mound of stone alongside from which A pine 6 ins diam, bears N. 40° W. 17 links dist. marked

Subdivisions T. 3 N. R. 13 E.

Chs.	
	T. 3 N. R. 13 E. S. 1939.
	A pine, 6 ins. diam. bears N 10° E. 14 links dist. mkd T. 3 N. R. 13 E. S. 20 B.T.
	A pine 8 ins diam. bears S. 5° W. 7 links dist. marked T. 3 N. R. 13 E. S. 30 B.T.
	Land, rolling
	Soil, 1st rate
	Timber, pine on 80.00 chs.
	Eastern a random line bet. Secs. 29 and 39 Va 16° 35' E
10.00	A post 10 chains in diam. 10.00 chains North.
26.00	Ridge bears N.E. and S.W.
40.00	Set temporary W.C. for cor.
80.00	Intersect N and S. line 39 Mt. H. of cor. to Sec 29, 21,

3 M. N. 13 E. S. L. M.

1939. bears t. mkd 20 B.T.	Chs.	28 and 29 from which Iron N. 89° W 3' W. on a true line bet. Secs 20 and 29. with 2 saw Qs.
bears S. marked T. B.T.	40.00	Set Cobble Stone 11x10x 6 ins 6 ins. in the ground, for 1/4 Sec. cor. marked 1/4 on N. fa and raised a mound of Stone alongside, from whic A pine 13 inch diam, bears N. 15° E. 23 links dist. mkd 1/4 S. B.T.
80.00 chs.		No other trees within limits.
om line		
5° E	80.00	The cor. to Secs 19. 20 29 and 30
diam.		Land, mountainous.
and S.W.		Soil, 2nd rate.
e. cor.		Timber, pine on 80.00 chains
line 29		September 5th 1888
20.21,		

2 1/2.

Subdivisions T. 3 K.

Ch.	West on a random line bet. Secs. 19 and 30
	N 16° 25' E.
11.70	Spring branch, 15 lks. wide 10 lks. deep, runs N.
11.00	Set temporary 1/4 Sec. cor.
78.62	Intersect W. boundary of T. 3 N. 30 lks. S. of cor. to Secs. 19 and 30, re-established by me on this survey from which I run,
	S. 89° 47' E. on the line bet. Secs 19 and 30, with same w.
38.62	Set quartzite stone 12 x 8 x 6 ins. 8 ins. in the ground for 1/4 Sec. cor. marked 1/4 on N. face from which A pine 5 ins. diam. bears S 10° W. 31 lks. dist. marked

8.6

2.00

5.00

5.00

BOOK A 186
R. 13 E. T. 1 S. M.

Chs. | 1/4 S.B.T.
A pine, 5 ins. diam, bears N. 80° E. 9 links dist, mkd 1/4 S. B. T.
78.62 | Pk cor to Secs 19 & 20 & 29 and 30.
Land, rolling.
Soil, 1st rate.
Timber, Pine on 78.62 chs.

North bet. Secs 19 & 20
Vs 16" 25 E.
2.00 | Cedar-meadow bears N.E. and S.W.
Leave 2 ins.
5.00 | Set quartzite stone 18 x 8 x 6 ins. 12 ins. in the ground, for 1/4 Sec. cor. marked 1/4 on W face
5.00 | from which
A pine 18 ins. diam. bears

Subdivisions T. 37 N.

Set. N. 15° W. 35 lks. dist, mkd.
1/4 S.B.T.
A pine 8 ins. diam. bears
N. 60° E. 39 lks dist mkd.
1/4 S. B.T.

42.50 Spring branch, 3 lks. wide
4 ins. deep, runs W.

80.00 Set quartzite stone 16x8x7 in. in the ground for cor. to sec. 17. 18. 19 and 20. marked 3 notches on S. and 5 notches on E. edges, and raised a mound of stone alongside from which

A pine, 18 ins. diam. bears
N. 10° W. 20 links dist. marked
T. 37 N. R. 13 E. S. 18. B.T.

A pine 14 ins. diam, bears
N. 8° E. 15 lks. dist. marked
T. 37 N. R 13 E. S. 17 B.T.

T. 37 N. BOOK-A-186. 27 R. 13 E. 3 L. M.

it, mkd.

bears
it mkd.

E. wide
ft.
71 lks. set
set 17.
ked 2
notches
ared at
ongrade

bears
t. marked
B. T.
bears
marked
T.

Sh. A pine 12 ins diam, bears
S. 1° E. 18 links dist. marked
T. 37 N. R. 13 E. S. 2 B.T.
Land, rolling.
Soil, 2nd rate.
Timber, pine and aspen on
80.00 chains

East on a random line
bet. Secs 17 and 20
Var 16° 30' E.

+9.50 A Spring 25 lks S.
+0.00 Set temporary 1/4 Sec. cor.
+4.50 Ridge bears N. and S.
-10.10 Intersect N and S. line of sec.
to Secs 16, 17, 20 and 21 from
which Iron
West on a true line bet.
Secs 17 and 20, with same var.
-1.05 Set quartzite stone 10 x 8 x 5 ins.

Subdivisions T. 3 N.

Chs.	Gris ni the ground, for 1/4 Sec. Cor. marked 1/4 on N. face and raised a mound of stone alongside. from which A Balsam, 14 lks. diam, bears S. 2 9 lks dist. marked 1/4 S.B.T. No other trees in distance.
80.00	The cor. to Secs. 17. 18. 19 and 20.
	Land, broken
	Soil, 2nd rate
	Timber, Pine on 80.00 chs.
	West on a random line bet. Sec. 18 and 19 Va 16° 35' E.
3.70	Spring branch 15 lks wide 6 lks. deep runs N.
11.50	Spring branch 10 lks wide 6 lks. deep, runs N.E.
40.00	Set temporary 1/4 Sec. cor.

BOOK-A-186

T. 6 N. R. 1 & 2 E. S. L. M.

	Chs.	
, for 1/4		
on N. face	78.69	Intersect W. boundary of Sec.
of stone		18 & 19 S. of cor to Secs. 18 &
ch		19, re-established by me during
ans, bears		this survey, from which I run
ked 1/4 S.B.T.		S. 89° 39' E. one chain be-
ristance.		tween Secs 18 & 19 with same va
18.19 and 20.	38.69	Set quartzite stone 12x10x3
		ins. 8 ins. in the ground, for
		1/4 Sec. cor. marked 1/4 on N. face
1/4 chs.		and raised a mound of stone
		alongside.
		Timber, all burnt.
	78.69	The cor. to Secs. 17.18.19 & 20.
		Land, broken
		Soil, 1st rate.
		Timber, pine and aspen
		partly burnt on 78.69 chs
5' E.		
ke wide		
ke wide		
E.		
Sec. cor.		

Subdivisions T. 37 N.

Chs

North bet. Secs 17 and 18
Va 16° 35' E.

28.30 Spring branch, 20 inches wide
10 ins. deep, runs N.E.

40.00 Set Cobble stone 14 x 12 x 6 ins.
8 ins. in the ground, for 1/4
Sec. cor. - marked 1/4 on W.
face from which.
An aspen, 8 ins diam, bears
S. 50° W. 27 lks. dist. - marked
1/4 S. B. T.
An aspen 5 ins. diam, bears
S. 40° E. 28 lks. dist, mkd
1/4 S. B. T.

48.55 The calculated intersection
with the state of Wyoming
boundary line, Mile post
N° 339 cannot be found,
Here I set a sand stone
10 x 10 x 6 ins, 6 ins, in the

BLCM-A-186

3 N.
Rod 18
35' E.
mile mile
E.
x 6 mis.
for 1/4
down W.
iam, bears
N. marked
aim, bears
it, mile
Section
Wyoming
post
be found,
d stone
s, on the

R. 13 E. 2nd & 4th S. L. M.

ground, for closing corners to fractional Secs. 17 and 18, marked with cross (+) and "C.C." and raised a mound of stone alongside
Land, rolling
Soil, 1st rate.
Timber, Pine on 4 & 5 chains
September 6th, 1881

General Description

This Township embraces some fine timber land on Smiths Fork and its affluents

The timber has been partly killed by fire, but a young growth is coming up to replace it.

Carters old saw-mill is in Sec. 28, and a wagon road along Smiths Fork, otherwise there are no improvements in this Township

A. D. Perrow
U.S. Deputy Surveyor

BUU DUGA-A-186 251

U. S. SURVEYOR GENERAL'S OFFICE,

Salt Lake City, Utah, Jan 25th 1882

The foregoing field notes of the survey of the

Subdivisions

Township No 3 N. *Range No* 13 E.

of the Salt Lake Meridian, Utah Territory,

Executed by A. D. Perron

Under his *contract No* 105

of the 29 *day of* July 188?,

in the month of Sept. 188?,

having been critically examined, the necessary corrections and explanations made, the said field notes, and the surveys they describe are hereby approved.

Wm. Salisbury,

U. S. Surveyor General for Utah.

R: 1283 252

Filed

188 .

Examined by
Compared by

FIELD NOTES

OF

THE SURVEY OF THE

Subdivisional Re-

Mid. Stand. Pas. North (South Bdy)

of Township No. 16 South, Range No. 6 East

of the Salt Lake Meridian in Utah Territory.

BY

A. D. Timon

U. S. DEPUTY SURVEYOR,

Under his Contract No. 110

dated August 29th 1882

Survey commenced Oct. 21st " 1882

Survey completed " " 1882

1886-7

BOOK-A-186

Running 253

2nd Range. Par. Const. Rd E.

Survey continued Oct 21st. 1882

From the Cor. to Townships 10 S.
R. 6 & 7 E. previously identified
Grun
West on S. side of Sec. 36
Var. 15° 35' E.

14.00 Ridge bears N.W. & S.E.
27.25 Ravine drains N.W.
40.00 Old Cor. not found. Set a Lime
stone 12 x 7 x 6, 8 in. deep, marked 1/4
on N. face, and raised a stone
mound alongside for 1/4 Sec. Cor.
72.30 South fork of Soldier Fork, 15 lks.
wide 10 in. deep runs N. E.
73.00 D. & R. G. R. R. bears N.E. & S.W.
73.60 Telegraph Line " " "
75.10 Wagon road " " "
76.25 Ascend.
80.00 The old Cor. being destroyed I
set a sand stone 18 x 14 x 7, 12 in. deep
marked 1 North on E, 5 on W,

Running
Ont Stand Cor. T. 2 S., R. 6 E.

and 6 on N. edge and S. E.
and raised a stone mound along
side for Standard Cor. to Sec. 35 & 36
Land broken Mountains
Soil 3rd rate
No Timber
Mountains run on 80 Chs.

West on D. side Sec. 35
Var 16° 35' E.

40,00 Oak cor Stones over which I dug
bring a Pond Stone 18 x 18 x 8, 12 in. dug
marked 1/4 on N face with stone
mound 1 ft in cor.

39,50 Ruled down to 6.

80,00 Original cor not found, Set Stone Mon
18 x 10 x 9 in, 12 in dug marked
2 Notches E. & on W. of 6 on N. edge of S.
with Stones mound along side for
Standard Cor to Sec — 34 & 35

BOOK-A-186

Remarks 25 T. R 6 E.
2nd Stand. Par. S. L. M.

Land mountainous
Coal 3rd rate
Trees scattering pine & aspen
on W. end.
Mountainous on Rocki.
Oct 21/82

Note for General Descrip-
tion see notes of Tp. 6 S. R 6 E.
A. W. Ferron
U. S. Dep. Surv.

BOOK-A-186

U. S. SURVEYOR GENERAL'S OFFICE,

Salt Lake City, Utah, June 9th 1883

The foregoing field notes of the fractional survey of the 2nd Standard Par. South through *Township No* 10 S. *Range No* 6 E. *of the Salt Lake Meridian, Utah Territory, Executed by* A. D. Farron *Under* his *contract No* 110 *of the* 29th *day of* August 1882 *in the month of* October 1882, *having been critically examined, the necessary corrections and explanations made, the said field notes, and the surveys they describe are hereby approved.*

Fred Salomon

U. S. Surveyor General for Utah.

BOOK-A-186

R. 1883. 257

Filed January 19th 88 187.

Examined by

Compared by

FIELD NOTES

OF the Fractional Survey

THE SURVEY OF THE East Boundary

of Township No. 10 South, Range No. 6 East

of the Salt Lake Meridian in Utah Territory.

BY

A. D. Simon

U. S. DEPUTY SURVEYOR,

Under his Contract No. 110

dated August 29th 1882.

Survey commenced Oct 20th 1882

Survey completed " " 1882

186-8

Re-Survey
1006-A 186 258
East Boundary Tp 10 S. R 6 E.

Survey Commenced Oct 20. 1882.

From the Standard Cor.
to Tp. 10 S. R 6 & 7 E. on the
2nd Standard parallel S.
I set a sandstone 24 x 14 x 3.
pyramid set with stone mound
2 Beginning tree Witness
along side, 2 Ash N. between
Sec. 31 & 36
Var. 16° 33' E.

12.75 Road bears N. W. & S. E. in
ravine 230 ft. deep drains N. W.
32.40 Ravine 150 ft. deep drains S. W.
40.00 Original Cor. broken in pieces.
I set a sandstone 16 x 10 x 6, 11 in.
deep, marked 1/4 on W. face
with stone mound along side
Jun 1/4 Sec. Cor.
57.70 A Cedar 8 in. dia.
80.00 The old Cor. being gone I set
a sandstone 13 x 10 x 6, 8 in. deep
marked notch on E. & 5 on N.

Running
East Boundary T. 10 S. R. 6 E
280

	edges with stone mound along	74.05
	side for Cor. to Sec. 25. 30. 31 + 36	75.00
	Land rolling mountainous	80.00
	Soil 2nd rate	
	No Timber	
	Mountainous on 80 chs.	
	North bet. Secs. 25 + 30	
	Var. 16° 33' E.	
7.65	Spring Branch 2 lks. wide 4 in.	
	deep runs W.	
40.10	Original Cor. not found. A	
	Sandstone 10 x 10 x 6, 6 in. deep,	
	marked 1/4 on W. face with	Note.
	stone mound alongside for 1/4	
	Sec. Cor.	
69.10	Soldier Fork Creek 10 lks. wide	16.0
	10 in. deep, runs S. W.	40.0
70.40	D. + H. G. R. R. bears E. + W.	
71.80	Wagon road " " "	

BOOK-A-186

Resurvey East Boundary Tp. 10 S. R. 6 E.

74.05'
75.00
80.00

Telegraph line bears E. & W.
Sec. corner N. corner place.
The Arrie corner bearing West Sandstone
18 x 10 x 6, 12 in. deep, marked 2 Notches on S. &
4 on N. edges with stone mound
along side for Cor. to Sec.
19. 24. 25 + 30.

Land rolling mountains
Soil 2nd rate
Timber a few scattering
Cedars Pine on N. end.
Mountainous on S Cors.

Note:

New survey begins.
North bet. Sec. 19 + 24
Var. 16° 33' E.

16.00
40.00

Ridge bears N. E. + S. W.
Set Sandstone 28 x 16 x 16, 18 in. deep,
marked 1/4 on W. face with
Stone mound alongside for 1/4 Sec. Cor.

East Boundary T. 10 S. R. 6 E.

261

72.00 Hollow drains N. W.

80.00 Set Sand stone 24x14x4, 8 in. deep marked 3 Notches on S. & N. Edges with stone mound along side for Cor. to Sec. 13. 18. 19 & 24. from which a Cedar 7/4 in. dia. bears S. 36° E. 30 lks. dist. marked B.T. S. R 6 E. S. 24 B.T. a pine 16 in. dia. bears N. 58 1/2° W. 47 lks. dist. marked B.T. S. R. 6. E. S. 13 B.T.

Sand heavy rolling rocky

Soil 3rd Rate Sandy

Timber Scrub Cedars

Mountainous on 80 chs.

BOOK-A-186

East Boundary Jno. 1866.

262

1883.

North Pt. Sec. 13 & 18

Var. 16° 33' E.

Spring Branch 10 lks. wide 4 in. deep, in Cañon 150 ft. deep runs S. W.

Set Sand stone 12 x 10 x 4, 8 in. deep, marked 1/4 on N. face with stone mound alongside for 1/4 Sec. Cor.

Indian Creek 15 lks. wide 6 in. deep, in cañon 150 ft. deep runs S. W.

Set Sandstone 14 x 13 x 3, 9 in. deep, marked 2 notches on N. & 4 on S. edges with stone mound alongside for Cor. to Sec. 7. 12. 13 & 18

Land heavy rolling Mountains

Soil 3rd rate

Timber scattering dwarf pine & cedar

Mountains on 80 chs.

East Boundary Tp 10 S. R 6 E.

Note: On account of unavailable
Mountains, this continues
East here.
Oct 20. 1882

Note: For General Description see
Sub divisions of this Township.
A. D. Lemon
U. S. Dep. Sur.

BCUR-A-186

U. S. SURVEYOR GENERAL'S OFFICE,

Salt Lake City, Utah, June 9th 1883.

The foregoing field notes of the survey of the fractional ~~R~~ and survey

East Boundary

Township No 16 N. *Range No* 6 East

of the Salt Lake Meridian, Utah Territory,

Executed by C. L. Ferron

Under his *contract No* 110

of the 29th *day of* August 1882

in the month of October 1882

having been critically examined, the necessary corrections and explanations made, the said field notes, and the surveys they describe are hereby approved.

Fred Salmon

U. S. Surveyor General for Utah.

BOOK-A-186
R: 1883 265

Filed 1883.

Examined by John M. Groupe
Transcribed. Michaelis
Compared by

FIELD NOTES

OF

THE SURVEY OF THE fractional Subdivisions

of Township No. 10 S., Range No. 6 E.

of the Salt Lake Meridian in Utah Territory.

BY

A. D. Perron

U. S. DEPUTY SURVEYOR,

Under his Contract No. 113,

dated Oct. 9th 1882.

Survey commenced Oct 23rd 1882.

Survey completed " 30 1882.

186-9

BOOK-A-186

Township 10 S. R. 6 East.

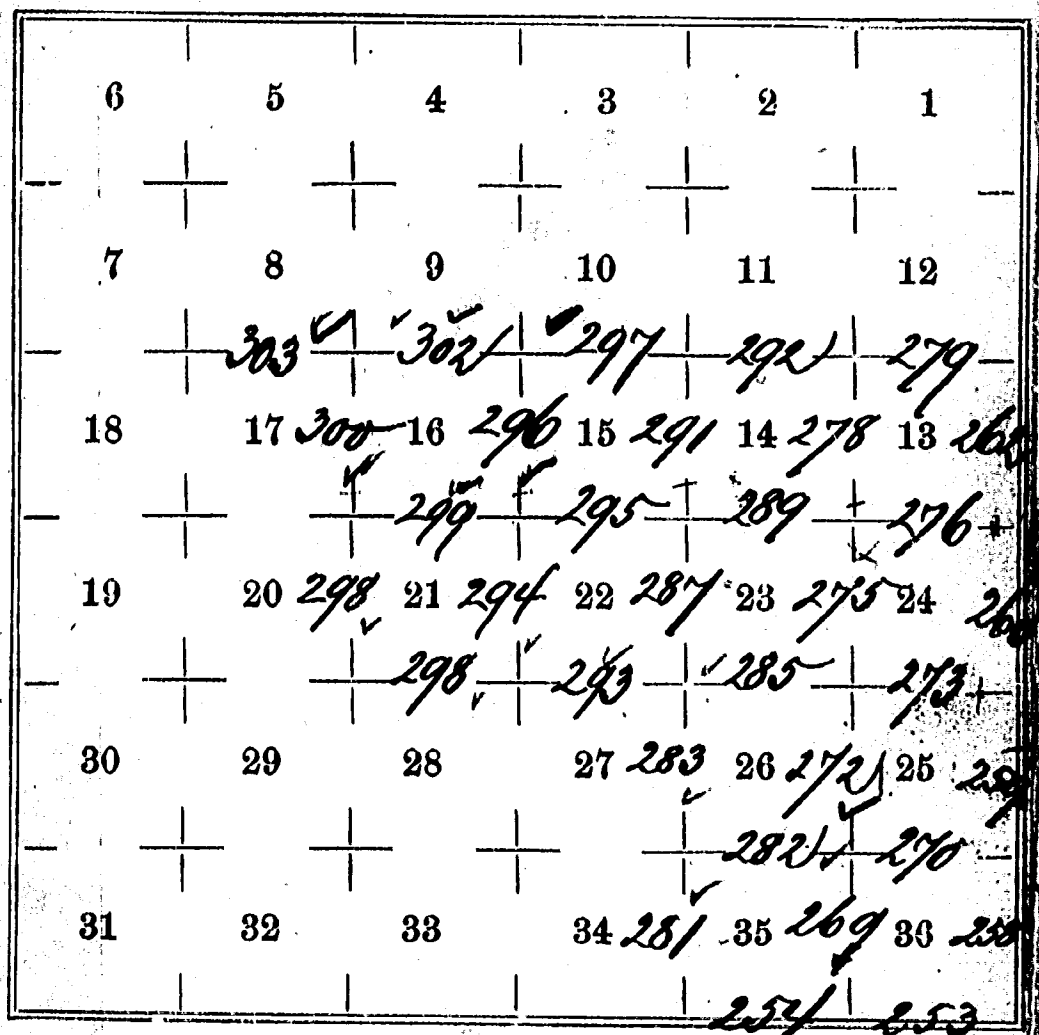

BOOK-A-186 266

[1.—PRELIMINARY OATH OF COMPASSMAN.]

I, Will A Gurlinski do solemnly swear that I will well and truly perform the duties of compassman, according to instructions given me, and to the best of my skill and ability, in the survey of the Tps. 10 S. R. 6 E. Tps. 11 S., R. 8 E., Tps. 11 S., R. 9 E., Tps. 17 S. R. 9 E., Tps. 17 S. R. 8 E., Tps. 18 S., R. 7 E., Tps. 19 S. R. 9 E., Tps. 20 S. R. 8 East of the Salt Lake base and meridian in the Territory of Utah.

Will A Gurlinski, Compassman.

Subscribed and sworn to before me this 20 day of October 1882

A. D. Gunn

U.S. Dep. Surv.

BOOK-A-186

- 267

[2.—PRELIMINARY OATH OF CHAINMEN,]

We, George Markbank & William Roeber and Thomas Starkey & Thomas Fugate, do solemnly swear that we will well and faithfully execute the duties of chain carriers; that we will level the chain upon even and uneven ground and plumb the tally pins, either by sticking or dropping the same; that we will report the true distance to all notable objects, and the true length of all lines that we assist in measuring, to the best of our skill and ability, and in accordance with instructions given us, in the survey of the Tp. 10 S. R. 6 E., Tp. 11 S. R. 8 E. Tp. 11 S. R. 9 E., Tp. 14 S. R. 9 E., Tp. 17 S. R. 8 E., Tp. 18 S. R. 7 E., Tp. 19 S. R. 9 E. Tp. 20 R. 8 E.

of the Salt Lake base and meridian in the Territory of Utah.

George Markbank, Chainman.

William Roeber, Chainman.

Thomas Starkey, Chainman.

Thomas Fugate, Chainman.

Subscribed and sworn to before me this 20th day of October 188 2

C. D. Gunnison

U. S. Dep. Surv.

BOOK-A-186 268

[3.—PRELIMINARY OATH OF AXEMEN.]

We Jezreel Fugate

and [illegible]

do solemnly swear that we will well and truly perform the duties of axemen, in the establishment of corners and other duties, according to instructions given us, and to the best of our skill and ability, in the survey of Tp 10 S. R 6 E. Tp. 11 S. R. 8 E. Tp. 11 S. R 9 E. Tp 14 S. R 9 E. Tp. 17 S. R. 8 E. Tp 18 S. R 7 E. Tp. 19 S R. 9 E. Tp 20 S R 8 E.

of the Salt Lake base and meridian in the Territory of Utah.

Jezreel Fugate, Axeman.

[illegible], Axeman.

Subscribed and sworn to before me this 20 day of October 1882

A. H. Thurman

U. S. Deputy Surv

BOOK-A-186

Subs Dk 10 S. R 6 E.

Survey commenced Oct 23/82
The instrument used a Gurney's
Solar compass.
Commenced at the cor to Sec. 35 & 36
on the Second Stand. Par. South Running the South boundary of this
Sp. which is a Sand Stone 17x12x8 firmly
set in the ground with one Notch on E.
Son W. and Son N. edges and the letters
S. C. and a Stone mound. Thence
From North bet. Sec. 35 & 36.
Var: 16° 30' E.

2.50 Road, in cañon 100 ft. deep, bears E & W.
40.00 Near bend of South Fork of Soldier
Creek, Set Sand stone 15x12x10. 10 in.
deep, marked ¼ on W. face, and
raised a stone mound along side for
¼ Sec. cor. Thence in bottom
44.75 Telegraph line, bears N.W. & S.E.
47.25 Denver & Rio Grande R. R. Clearance

Subs T. 27 S. R. 6 E

Valley Branch / bears N.W. & S.E.
48.00 Wagon Road, bears N.W. & S.E.
at crossing of S. fork of Soldier Cr.
15 lks wide 10 in. deep, runs N.W.
ground.
Do.00 Set sand stone 16 x 12 x 6, 11 in. dep.
marked 1 Notch on S & E. edges,
and pairied a stone mound alongside
for corner Sec. 25. 26. 35 & 36, from
which a Cedar 12 in dia bears: S. 30° W.
38 lks dist, Marked T. 10 S., R 6 E.,
S. 35, B.T.
Land, mountainous;
Soil 2nd & 3rd rate;
Timber a few scatt. Cedar
Mountainous & dense undergrowth on Sod.

East on sandom line, bet. Secs. 25 & 36.
Var 16° 33' E.
29.00 Head of gulch, drains N.W.

40.00 S
52.75
76.00 K
80.25 Sm
g
Sa
m
40.12½
Co
80.25 C

BOOK-A-186 27

Salt Lake Meridian

40.00 Set temp. 1/4 sec. cor.

52.75 Ravine 300 feet deep, drains N.W.

76.00 Ravine 100 feet deep, drains N.W.

80.25 Intersect E. Bound. of Tp. 37 N. R. 4 W. of cor to Secs. 25 & 36, which is a Sandstone 13 x 10 x 8, firmly set in the ground marked one notch on E. & S. on N. edge, and a stone mound, from which N 89° 44' W. on true line bet. Secs. 25 & 36, with some variation

40.12½ Set Sandstone 16 x 8 x 6, 11 in. deep, marked ¼ on N. face, and raised a stone mound along side, for ¼ sec. cor.

80.25 Sec. cor to Secs. 25, 26, 35 & 36.

Land, mostly mountainous;

Soil, Sandy;

No Timber

Mountainous & dense undergrowth on 80.25 chs

Sub. Th 10 S. 37 R 6 E.

North bet. sec. 25 & 26.
Jan 16° 33' E.

3.00 Ravine 100 ft. deep, drains N.W.
36.60 Small Hollow drains W
40.00 Set Sand stone 16×8×5, 11 in dep, marked 1/4 on W. face and raised a stone mound alongside for 1/4 sec cor.
57.60 Hollow 50 ft. deep, drains W.
65.25 Enter South Fork of Soldier Canon
67.70 S. fork Soldier Creek 15 lks. wide 10 in. deep, runs N.E.
68.50 D. & R. G. R.R. bears N.E. & S.W.
69.75 Telegraph line bears N.E. & S.W.
70.60 Wagon road " " " "
Mound & enter Scrub cedar & pine
80.00 On N. side of gulch 100 ft deep drains E. Set Sand stone 18×11×4, 12 in. deep, marked 2 Notches on S. & on E. edges and raised stone mound alongside

BOOK-A-186

Salt Lake Meridian

For cor to Sec's. 23. 24. 25 & 26.
From which a cedar 5in dia.
bears: N. 1° W. 32 lks dist, marked
T10 S., R6 E., Sec 23. B.T.
Land, mountainous;
Soil, 2nd rate,
Timber Scatt. Cedar & pine
on N. end.
Mountainous on 80 chs.

East on random line but Sec's.
N and 25. Var 16° 33' E.

6.40 Wagon road in Canon bears N. & S.W.
leave Cedars, enter brush

7.80 Telegraph bears N & S.

8.30 D. & R. G. R.R. (Pleasant Valley Branch)
bears N.E. and S.W.

8.90 S. Fork Baldwin Creek 15 lks wide
10 ins deep runs N.E. ascends

25.00 Rainin 30 ft deep. drains N.

Sub. Dr. to 27 T. 6 S. R. 6 E.

30.00	Soldier ~~Front~~ C. (East fork) 20 lks wide 15 in dep., runs N. Stn under cañon Stat.		a Bl... 20 C...
31.50	Dx R. G. R. R. bears N. W. & D. E.	80.08	The... Sand...
33.90	Wagon Road " " " "		E
34.20	Telegraph " " " "		Mon...
40.00	M. C. R. R. grade " " " " Set temp. ¼ Sec cor. enter hills.		
80.08	Intersect E. Bound. of Tp. 33 lks N. of cor to Secs 24 and 25, which is a Sand Stone 18 x 10 x 6, firmly set, marked ½ Sec on N. edge, with Stone mound — from which Cedar N. 89° 46' W. one link dist. Pec 24 & 25	28.00	Cla... six
		28.40	Wa...
		34.40	Sec...
40.04	Set cor falling on the unfinished grade of the M. C. R. R. & set ½ 50 lks N. of cor point a Slate 24 x 11 x 4, 17 in dep., marked ¼ on N. face of W. C., and raised a Stone mound along side for Witness to the cor, from which	40.00	Set ... mou... Ston... Sec... N. ¼
		80.00	Set

BOOK-P... Salt...

Salt Lake Meridian

a Blacksmith's forge, bears N50°W.
20 lks dist.

80.08 Thence to Sec's 23. 24. 25 & 26.
Land, mountainous;
Soil 2nd rate;
No Timber
Mountainous on 80.08 chs
Oct. 24th 1882

North bet. Sec's 23 & 24
Va. 16°33' E.

28.00 Bear Creek, 15 lks wide, 10 ins deep,
in Cañon 150 ft deep, runs E.
28.40 Wagon Road bears E & W. ascend
34.40 Head of Ravine, 50 ft. deep, drains S.E.
40.00 Set Sandstone 12×8×6, 8 ins dug,
marked 40 on W. face, and raised a
stone mound alongside for 1/4 Sec cor.
from which, a cedar 6 ins. dia. bears
S. 7° W. 18 lks dist. marked 1/4 B. T.
80.00 Set Sandstone 16×12×3, 11 ins deep,

Aubs Th 276 D., R 6 E.

BOOK-
Sal.

marked 3 Adchison D. and 1 on
E. edges, and raised a blaze mound
alongside, for cor to bet. P. 13.14.23 & 24.
Land, mountainous; Soil 2nd rate
No Timber, heavy undergrowth
Mountainous as 80 chs

Set on random line bet sec. 13 & 24
Va 16° 33' E

2.90	U. C. R. R. grade.
4.00	Enter Cañon, Soldier Creek, 25 lks wide 15 in deep, runs N. W.
4.80	Telegraph line bears N. W & S. E.
5.15	D & R. G. R. R. " " " "
6.85	Wagon road " " " "
11.00	Ascend, enter Saint Cedar
13.00	Ravine soft clay drains N. W.
21.50	Ridge bears N. & S. W.
34.50	Ravine soft clay drains S.
38.20	Wagon Road bears N. & W. in Cañon

40.00
40.05
40.30
49.00
57.00
57.75
63.00
80.00
40.00
80.00

Salt Lake Meridian

100 ft. dup, drains S.W.

40.00 Set stump. 1/4 Sec. cor.

40.05 Branch road bears N.E. & S.W.

40.30 Indian Creek, 15 lks wide, 10 in dup, runs S.W. & S.E.

49.00 Enter Canon, drains N.W.

57.00 Enter Creek, 15 lks wide 10 in dup

57.75 Leave Creek, heads N.E.

63.00 Mouth of hollow " " S.E. & S.E.

80.00 Intersect E. bound. of Sec at cor to Sec. 13 & 24, which is a Sand stone 24 x 14 x 14, firmly set, marked 3 notches on N. & E. edges, with stone mound, from which:

West on true line bet Sec. 13 & 24.

40.00 Set Sand stone 12 x 10 x 8, 8 in dup, marked 1/4 on N. face, and raised a stone mound alongside, for 1/4 Sec. cor.

80.00 The cor to Sec. 13. 14. 23 & 24.

Land, mountains,

Surv Ch 10 L. R. & L.

Soil 2nd & 3rd rates;
Timber a few cedar.
Mountainous on 80 chs.

North last Sec. 13 & 14
Va 16° 33' E.

3.00 U.C.R.R. sur. 20 ft dup, enters Cañon
4.80 Telegraph line bears: N.W. & S.E.
5.20 D & R.G.R.R. " " " "
(the wagon road has crossed the R.R.)
10.30 Soldier Creek 25 lks wide, 15 in dup
runs N.W. around, under Cedar
17.50 a pine 12 in dia.
31.00 Gulch 300 ft. dup drains S.W.
40.00 On top of sand stone ledge set
sand stone 18×12×4, 12 in dup,
marked 1/4 on W. Jan, and raised a
stone mound alongside for 1/4 Sec cor
from which a cedar 8 in dia.
bears N 80° W. 16 lks dist, marked 1/4 S.B.T.
blaze cedar descend.

60.0
79.4
Do.0
12.0
31.0

Salt Lake Meridian

60.00 Hollow 175ft deep drains N.W. enters Cedar.

79.40 Spring branch 3 lks wide, 2in deep, in Canon 200ft deep, runs N.W.

80.00 Set sand stone 14x10x4, 9in deep, marked 4 Notches on S & W edges, and raised a stone mound alongside for Cor. to Sec. 11, 12, 13 & 14, from which a Cedar 3in dia bears S 70° E. 40 lks dist. marked T 1 S. R 6 E. S. 13 B.T.

Land mountains, Soil 2nd rate. Timber & catt. Pinon. Cedar. Mountainous on 80 chs.

Easton random line bet Sec. 12 & 13. Var 16° 33' E.

Arcing Canon

12.00 Spring branch 3 lks wide 2in deep runs S 80° W. Arcing hills

31.00 Gulch drains N.W. 30ft deep.

Subs Tp. 10 S., R. 6 E. 289

40.00	Set temp. 1/4 sec cor
71.50	Ridge, bears N.E. & S.W.
80.40	Intersect E. B. of Tp. at cor to Secs 12 7 13, which is a Sand Stone 14×13×5 lying set, marked 4 Notches on S. & W. edges, and Stone mound, from which Pine 12" 13. with Runs W.
40.20	Set Sandstone 11×9×8, 6 in above ground marked 1/4 S. on N. side and raised stone mound along side for 1/4 Sec cor.
Do 40	Pine cor to Secs 11, 12, 13 & 14. Sand mountains; Soil 3rd rate Timber, Scattering Sand Cedar & pine Mountainous on Do. 40 chs Oct. 25th 1882.

7.0
40.0
80.

BOOK-A-186 281

Salt Lake Meridian

From the cor. to Sec^s. 34 and 35 on
South B. of T^p. and 2^nd Stand. Par. S.
bears a spruce 18 inches in diam. with stone mound.
bears North Dist. Sec. 34 & 35
Var 16° 33' E.

7.00 Cañon 130 feet deep, drains E.

40.00 Set Sand Stone 12×8×7, 8 in.
deep marked 1/4 Sec. W. Sec.
and raised a stone mound
alongside for 1/4 Sec. cor.

80.00 On East Slope of high round
Mountain Peak set a lime
stone 18×14×4, 12 in. deep
marked 1 Notch on S. and
2 on E. edges, and raised
a stone mound for cor to
Sec^s. 26. 27. 34 and 35.
Land, mountains;
Soil, 3rd class;
No Timber
Mountainous on 80 chs

Subs. Tp 10. S., R 6 E., 28 29

	Easton, and down hill	80,00
	last. Sec? 26 & 35	
	Var 16° 33' E.	
40,00	Set temp. 1/4 Sec cor.	
74.50	Entr Cation,	
	S. fork of Soldier Creek, 15	
	lks wide, 15 in deep, runs N.	
75,00	Telegraph line bears N & S.	
75.30	D. & R. G. R.R. " "	
75.75	Wagon road " "	
80,00	Intersect N & S. line 34 lks	40,0
	E. of cor to Sec? 25, 26, 35 & 36.	
	from which Sun	
	S. 89° 45' W. on true line	
	last. Sec? 26 & 35, with same va.	
40,00	Set Sand Stone 14 x 8 x 5	63,
	9 in. deep, marked 1/4	63,
	on N. side, and raised	
	a Stone mound along side	64,
	for 1/4 Sec. Cor.	66,

BOOK A-186

280

Salt Lake Meridian

80.00	The cor. to Sec. 26.27.
	34 and 35.
	Land, mountainous;
	Soil, 2nd rate;
	No Timber;
	Mountainous on 80 chs.

North bet. Sec. 26 & 27
Va 16° 33' E.

Descend.

40.00	Set a Sand Stone 16×8×5
	10 ins dep, marked 1/4 on
	W. face, and raised a stone
	mound along side for
	1/4 Sec cor.
63.00	Enter Cañon
63.25	Clear Creek, 15 lks wide,
	10 in. deep, runs E.
64.50	Wagon road bears E & W.
66.75	Aqueduct, conrad bears

west about 6 chs dist.
67.75 Leave Station flat
enter Mountain slope
80.00 Set Sand stone 36×18×4
24 ins deep, marked 2
Notches on S. and E.
edges, and raised a
Stone mound along-
side for corner.—
22, 23, 26 & 27
Land, mountains;
Soil 2nd rate.
Timber Some
Scrub cedar on N. end.
Some oak underwood
and mountainous on 80 chs.

31.
33.
36.
38.
40.
Do.
40.

Salt Lake Meridian

East on random line
bet. Secs. 23 and 26.
Va. 16°33'E.

31.00 A round corral on S. side
of Creek bears South
about 4.50 chs dist.

33.25 Enter clear Creek, 15 lks
wide, 10 in deep, heads
S.W. runs East.

36.75 Leave same runs N.E.

38.00 Wagon road, bears N.E.
and S.W. around,

40.00 Set stone. 1/4 Sec. cor.

80.10 Intended N. & S. line
21 lks. N. of cor to Secs.
23, 24, 25 and 26.
From which Corner
N. 89° 51' W. on line
bet Secs 23 & 26.
Iron, stamped, variation.

40.05 Set Slate Stone 20x12x3.
15 in dep, marked 1/4

Subs. Th 10 S. R 6 E. 286

on N. face, and raised a stone mound alongside for 1/4 sec. cor.

Do. 10 The cor to sec! 22, 23, 26 & 27, Land, mountains!

Soil, 2nd rate;

Timber a few scattering Scrub cedar & pine

Mountainous on Do. 10 chs

Oct 26. 1882.

BOOK-A-186

Salt Lake Meridian

(North bet. Sec's 22 & 23
On 16° 33' E.

28.00 Pop. of Spur ridge
Joins on High Peak west-
runs out easterly.

Hoo, Set Sand stone 12x10x5
Pin dep. marked 1/4 on
N. face, and raised a
Stone mound alongside,
for 1/4 sec. cor.

Hoo, Set Sand stone
24 x 16 x 3, 18 in. dep,
marked 3 notches
on S. and 2 notches
on E. edges, and
raised stone mound
alongside for cor
to Secs 14. 15. 22 & 23,
Land, mountains,

288

Subs. Tr. 10 S., R. 6 E.

Soil; 2nd rate;
No Timber
Dense undergrowth of
oak and Dwarf berry
Mountainous on So. chs.

40,00

5.50

5,50

2,70

,05

BOOK-A-186 289

Salt Lake Meridian

East on random line bet. Secs. 14 & 23. Var 16° 33' E.

40.00 Set temporary 1/4 Sec. Cor.

5.50 Wash in small ravine, heads S., drains N.

5.50 Ravine 75 feet deep, drains North, heads South,

2.10 Intersect N. & S. line 51 lks North of corner to Sections 13. 14. 23 and 24 from which Line N 89° 38' W. on line bet. Sections 14 & 23 with same var. .05 Mt Dana bears N 14 W 12.5

Subs. N. 10 W., R. 6 E.

Pin oak, marked
1/4 on N. face, and
raised a stone mound
alongside for 1/4 sec. cor.
Sec. cor. to sec's 14, 15,
22 & 23.
Land mountainous
soil, 2nd rate,
Live timber
Dense undergrowth of
oak and chinquapin
Mountains on
Do. lds.

BOOK-A-186 391

Salt Lake Meridian

North bet sec. 14 & 15
Var 16° 33' E.

10.75 C. Powell's farm house
bears: N. 56½° E.

31.75 Same, bears: N. 88½° E.

34.00 Soldier Cr. in Canon, 25 lks wide
12 in deep, runs Westerly

34.50 Telegraph line, bears NW & SE.

35.00 D. & R. G. R.R. bears N.W & S.E.

38.00 Wagon road " " - "

40.00 Pet Sand stone 13 x 8 x 5, 9 ins
deep, marked 1/4 on W. face and raised
a stone mound alongside for 1/4 sec cor,

42.50 Wagon road bears N. & S. W.

43.50 Ascend enter Sand Cedar.

56.00 Ridge 250 ft high, bears E & W.

66.00 Gulch drains N.W. ascend

80.00 Pet Shale 18 x 16 x 6. 12 in deep, marked
4 Notches on S & E on E. edges, and
raised a stone mound for cor to sec.

Subs. N. 10 W., R. 6 E.

10. 11. 14 & 15.
Land, mostly mountainous;
soil 2nd & 3rd rate.
Timber a few scrub cedar
Mountainous on So. chs.

Eastn on random line bet.
Secs. 11 & 14. Var. 16° 33' E.

11.00 Gulch 100 ft deep, drains S.
40.00 Set temp. 1/4 Sec. cor.
57.00 Road in Eastn bears N. & S.W.
53.00 Die Fork Cr. 10 lks wide 10 in deep, runs S.W.
Ascend hollow heads E.
71.50 Ascend hills, leave hollow, heads N.E.
75.00 Low ridge bears N.E. & S.W.
80.00 Intersect N. & S. line at cor. to Secs. 11, 12, 13 & 14. from which, Pine
Meridian line bet. Secs. 11 & 14. with same variation.
40.00 Mound 22 x 12 x 6, 16 in deep, marked
X on N. face, & raised a stone mound

BOOK-A-186

Salt Lake Meridian

along side for 1/4 Sec cor, from which a cedar 20 in dia bears N. 60° E. 4 lks dist. marked 1/4 S. B. T.

80.00 The cor to dec. 10, 11, 14 & 15, Land, Mountains Coal Indicate Timber & catt. Cedar & pine Mountainous on 80 chs, Oct 27. 1882

State: The N.W. cor of Sec. 26 being unsurveyed on account of unavailable Mountains, Run from the cor to Sec. 22. 23. 26 & 27. West on true line bet. Sec. 22 & 27, Va 16° 33' E.

40.00 Set Iron stone 16x10x5, 11 in dug, marked 1/4 on N. face, and raised stone mound along side for 1/4 Sec cor,

72.00 Gulch 150 ft dug drains N.W.

80.00 Set Sandstone 10x9x7, 6 in dug,

Subs. T. 10 S., R. 6 E.

marked 2 Notches on S. & E. edges & raised Stone mound, for Cor to Sec. 21, 22, 27 & 28.
Land, mountains;
Soil, Sedimentary;
No Timber
Mountains on Sochis.

Sec. Cor. Sec. 21 & 22.
On 16° 33' E.

7.00 Gulch 150 ft dwh, drains N. W.
36.50 " 75 " " " S. W.
40.00 Pit dug in Stone 10×10×6, 6 in deep, marked 1/4 on W. face, and raised a Stone mound alongside for 1/4 Sec. Cor.
45.75 Ridge bears N. E. & S. W.
67.00 Gulch 100 ft deep drains W.
80.00 Pit dug in Shale 18×12×3, 12 in deep, marked 3 Notches on S. & E. edges, and raised a Stone mound for Cor to Sec. 15, 16, 21 & 22

40.00
44.00
80.00
40.00
80.00

Salt Lake Meridian

Sand, mountains;
Soil, 2nd rate;
No Timber;
Mountains on 80 chs.

Easton random line bet.
Decs. 15 & 22 Va 16° 30' E.
40.00 Set stone. 1/4 Sec Cor.
44.00 Hollow drains N.
80.00 Intersect N & S. lines at cor to
Secs. 14, 15, 22 & 23. from which
Stump Easton same line bet Decs 15 & 22
which agree per.
40.00 Set Chalk 15 x 12 x 3. 10 ins dug,
marked 1/4 on N. face and raised a
stone mound alongside for 1/4 Sec Cor.
80.00 The cor to Secs. 15. 16. 21. & 22.
Sand, mountains;
Soil, 2nd rate;
No Timber;
Mountains on 80 chs.

Subs. Th. 10 T., R. 6 E.

2960

Portland Dec. 15 & 16
Ja 16° 33' E.

40.00 Pt Shaved Cedar post 4"x4"in 4 ft. long, 2 ft dug marked 1/4 S. on N. Sam, dug pits 18"x18"x12" N of S. of Post, 5 1/2 ft dist and raised a mound 1 yard 1/2 ft high, 3 1/2 ft base around Post, for 1/4 Sec. Cor.

57.20 Soldier Cr. 25 lks wide, 12 in deep, in Cañon, runs westerly

57.70 Telegraph line bears S. & W.

58.00 S. P. R. R. " " " "

61.00 Dragon Road " " " " around

67.50 Foot of steep mountain Pet Stone 14"x10"x10" deep marked 1/4 Sec 9 on S. & 3 on E. edges & N. C. for witness Cor 1/4 Sec. 9. 10. 15 & 16. & raised Stone alongside mound

80.00 Dry Creek mountain breaks, not Set.

Land, mountainous; Soil, 2nd rate Not Timbered

Mountainous on 80 chs

BOOK-A-186

297

Salt Lake Meridian

East on sandstone line bet. Secs. 10 & 15
Va 16° 33' E.

From the Witness cor. 12.50 chs S. of cor
Point to Secs. 9, 10, 15 & 16. Offset-
East - 40 chs, then North 12.50 chs to
H 0.00 on line, Set Stone 1/4 Sec. cor
80.00 Intersect N & S. line at cor to
Secs. 10, 11, 14 & 15, from which
West on true line bet Secs. 10 & 15
with 16° Same variation.
H 1.00 Set Sand Stone 9x8x8, Iron dub,
marked 1/4 on N. Jan quad raised
One mound along side Sn. 1/4 Sec. cor.
S 0.00 The cor to Secs. 9, 10, 15 & 16.
Land mountainous;
Soil 2nd & 3rd rate;
Timber Scatt. Scrub Cedar.
Mountainous on both sides.
Oct 28. 1882

State Threek Secs. 20, 21, 28 & 29
not being set, therefor, from the

Subs T. 10 S. R 6 E.

Cor to Sec. 21, 22, 27 & 28. Iron
Witness tree bears dist Sec. 21 & 28
Var 16° 33' E.

40.00 Pit Sand Stone 13×7×7. bin.
dep, marked T. on N. face, raised
Stone mound alongside for ¼ sec cor.

57.00 Gulch 50 ft dist, drains N.W.

80.00 Pit Sand Stone 9×9×7. bin.
dep, marked T. Notches on E. & W.
Iron E. edges, and raised a Stone
mound alongside, for Cor to Sec 20. 21. 28 & 29.

Land, Mountains,
Soil, Intrate,
Timber,
Mountainous on 80 chs.

North dist. Sec 20 & 21
Va 16° 33' E.

40.00 Pit Sand Stone 9×9×9. bin

BOOK

41.75
80.00

28.00
40.00
46.7
80.4

BOOK A-186

Salt Lake Meridian

Dak, marked 1/4 on W. face, and raised stone mound for 1/4 sec cor.

41.75 Gulch 175 ft dak, drains N.W.

Do.00 Set sand stone 11x10x9, 7 in. dak, marked 3 Natchez on S. & 4 on E. edge, & raised a stone mound alongside for cor to sec. 16, 17, 20 & 21. Land mountainous;

Soil Sandstone;

No Timber

Mountainous on 80 chs.

East on random line

bet sec. 16 & 21.

Var 16° 33' E.

28.00 Gulch 50 ft dak, drains N.E.

4.00 Set limp. 1/4 sec cor.

46.75 Gulch 100 ft dak, drains N.W.

80.40 Intersect N. & S. line 41 lks

E. of cor to sec. 15, 16, 21 & 22

mountainous on 80 chs. Oct 30. 82.

Subs. Tr. 10 S. R 6 E.

	from which I run	
	S. 89° 42' W. on true line	43.50
	but dec. 16° 21'	
	with same variation	
40.20	Set sand stone 10 x 10 x 6,	44.50
	ins deep, marked 1/4 on N.	45.10
	face, and raised a stone	45.50
	mound alongside, for 1/4 Sec Cor.	46.50
20.40	The cor. to Sec. 16, 17, 20, 21.	
	Land mountains	
	Oil, Gas rate;	
	No Timber;	
	Mountainous on 20.40 chs.	20.00

North bet dec. 16° 17
E. 16° 33' E.

15.50	Gulch 70 ft deep, drains N.E.
40.00	Enter Section set. Stake
	16 x 14 x 3, 11 ins deep, marked
	1/4 on W. face, and raised
	a stone mound alongside

BOOK-A-186 301

Salt Lake Meridian

for 1/4 sec cor.

43.50 Soldier Creek, 25 links wide
12 in deep, runs westerly

44.50 Telegraph line bears E & W,

45.00 D & R.G. R.R. " "

45.50 Wagon road " " ascend

46.50 At foot of Steep mountain
Set Shale 22 x 18 x 4, 16 in deep
marked 4 Notches on S & E. edges
and W.C.
And raised stone mound along
side for witness cor to sec. T. 9. 16 & 17

80.00 Set Shale 16 x 10 x 3, 11 in deep
marked 4 Notches on S & E. edges
and raised a stone mound
alongside for Cor to sec.
T 9, 16 & 17,
Land, Mountains;
Soil, 3rd rate,
No Timber
Mountainous on 80 chs.

on 80 chs. Oct 30. 82.

Subs. Th. 10 S., R. 6 E.

302

East on random line
between 9 and 16.
Var 16° 33' E.

12.00 Road in dark, canon
bears N. & S.

40.00 Cor. Sec. 9, 10, 15 & 16,

40.00 Spring branch 3 lks wide,
Mis. dark, in canon runs S.
N.E. Coy's cabin bears S. 12.50 chs

55.00 Crossed S. 12.50 chs to a point
from which N. E. most of 10
Char Coal Kilns bears S. 150 chs
dist. — thence run
East. 25.18 to a point 48 lks
S. of the Witness cor to Sec.
9, 10, 15 & 16. Said witness
bearing 12.50 chs S. of true
cor point. The Connection
would therefore be;

80.18 Intersect N. & S. line

Salt Lake Meridian

T. 8 S., R. 1 E.

4 Blk. I. of cor. post to
Sec. 9, 10, 15 & 16, from
which Cor.
N. 89° 39' W. on true line
bet Sec. 9 & 16. with same va.
H.09 Set Sand Stone 11x10x10, 6
in. dub, marked 1/4 on N.
face and raised a stone
mound along side for
1/4 sec. cor.
M.18 The cor. to Sec. 8, 9, 16 & 17
Land, Mountains;
Soil, Inferior
Timber, Cedar, Pine & Cedar,
Mountainous on M. 18 chs.

Sec. cor. to Sec. 7, 8, 17 & 18 not being set. Dem.

Witness line bet. Sec. 8 & 17.
N. 16 33' E.
H.00 Set Sand Stone 10x10x7 in. deep mounded 1/4 Sec. cor.
face, with stone mound for 1/4 Sec. cor.
Note. Witness line run on account of base mountains
Land, mountains Soil 3rd rate, Timber Scrub pine
mountainous on W. 0 chs. Var 30. 82.

Sub. Th. 12 S. R. 6 E. S. L.

304

General Description

The surveyed portion
this Township embrac
The bottoms along Golde
Fork Creek, and adja
Mountains covered
heavily with Scrub
and Cedar Timber
Sec. 24 contain the town
of Tucker on the Denver
and Rio Grand R. R.
Sec 14 contains some
improved farming lan
Sec. 16 contains several
Cabins and ten charco
Kilns*.—

A. D. Timm
U.S. Dep Surv.

* The appointments improvements (Edward Norris store) are situated
in S.W. corner Sec. 24 and consist of a Store building
and various outbuildings, and some fencing.

BOOK-A-186

U. S. SURVEYOR GENERAL'S OFFICE,

Salt Lake City, Utah, June 9th 1883

The foregoing field notes of the survey of the

fractional subdivisions

Township No 10 S. Range No 6 E

of the Salt Lake Meridian, Utah Territory,

Executed by A D Teeter

Under his contract No 113

of the 9th day of October 1882

in the month of October 1882

having been critically examined, the necessary corrections and explanations made, the said field notes, and the surveys they describe are hereby approved.

Fred Salomon

U. S. Surveyor General for Utah.

BOOK-A-186
R: 1883.

306

Filed 187 .

Examined by John H. Caughey

Compared by

FIELD NOTES

OF

THE SURVEY OF THE

South Boundary

of Township No. 11 S. , *Range No.* 8 E.

of the Salt Lake Meridian in Utah Territory.

BY

A. D. Pierson

U. S. DEPUTY SURVEYOR,

Under his Contract No. 110

dated August 29 1882

Survey commenced Nov. 8th 1882

Survey completed do 1882

186-10

BOOK-A-186

Township 11 S. R. 8 East

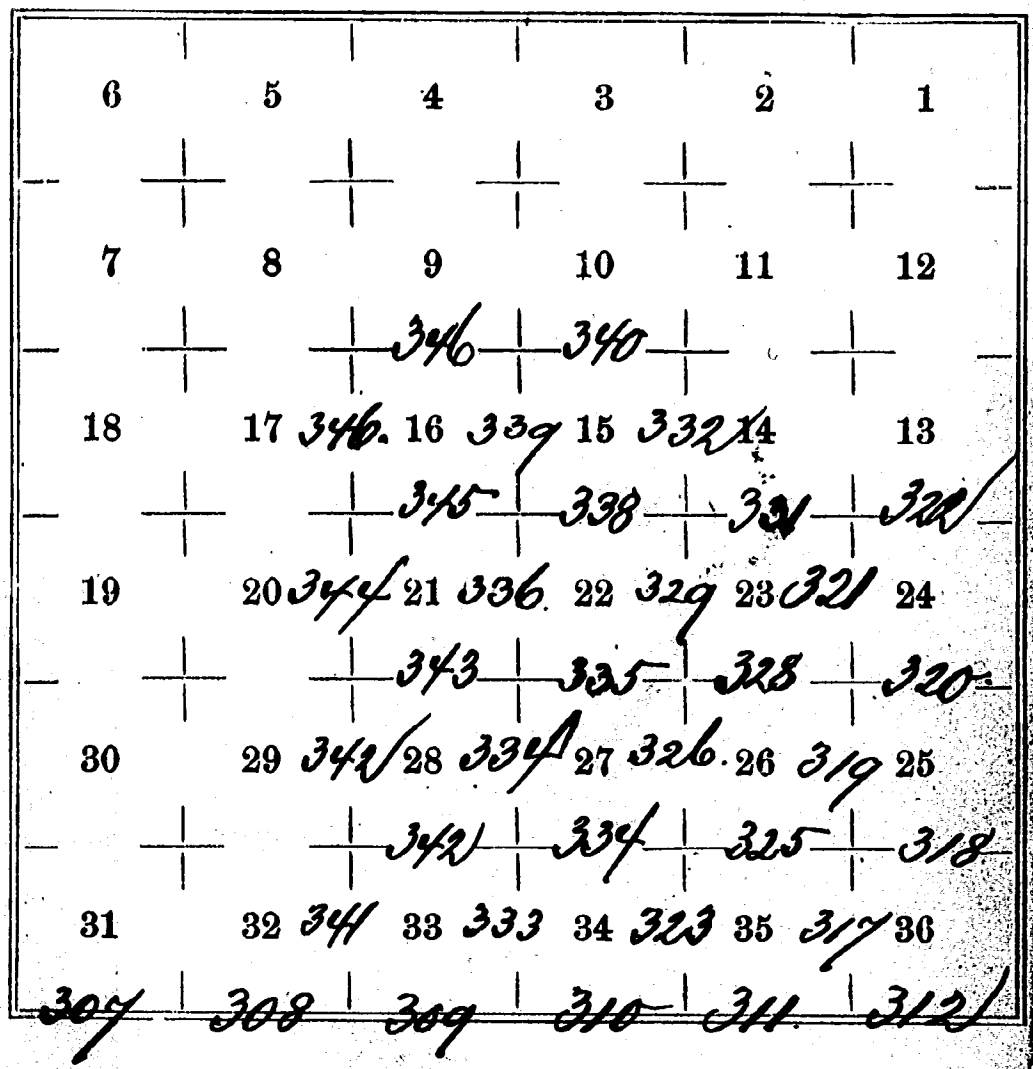

OOK-A-186

309

South Boundary Tp 11 S., Rs 8 & 9 E.

Survey commenced Nov. 8. 1852

From the cor to Tps 10 & 11 S., Rs 8 & 9 E.
recently set by me Chas West—
on standard line between said Tps.
Setting temp. Cor's survey 40 and
80 Chains. Mound the line to be
5 miles 75 chains and 50 lks. and
the falling to be 75 lks. N. of the Cor.
to Tps. 11 & 12 S. Rs. 7 & 8 E.
which is a Sandstone 30 x 16 x 4
firmly set with stone mound along
side. The correction will therefore
be 1 1/2 lks. N. per mile and the true
course will be N. 89° 55' E.

From said Cor. to Tps. 11 & 12 S.
Rs. 7 & 8 E. Chas
N. 89° 55' E on true line bet. Sec. 6 & 31
Var. 16° 21' E
Set charred quarking Asp post 3 x 3 ins.

South Boundary Tp. 11 S., Rg. 8 E.

4 ft. long, 18 in. deep, marked 1/4 S. on N. face
dug 2 pits 2 each 2 x 2 x 1 2 ft. E and
W. of post 5 ft. dist and raised a
mound of earth around post 4 ft. base
and 2 ft. high for 1/4 Sec. Cor.

58.50 Leave Timber

62.00 Road to saw mill bears N. E. & S. W.

75.50 Set Sandstone 24 x 14 x 7, 18 in. deep, marked
notch on W. and S. on E. edges with
stone mound alongside for Cor to Sec 2 & 3

Land Setting

Soil 3rd rate

Aspen Timber on 58.50 chs. and
Dense Undergrowth on 75.50 chs.

N. 89° 55' E. on true line bet. Secs. 5 & 32
Var. 16° 21' E.

40.00 Set Mine Stone 12 x 10 x 7, 18 in. deep, marked
1/4 on N. face with stone mound
alongside for 1/4 Sec. Cor.

BOOK-A-186

South Boundary T. 11 S., R. 8 E.

80.00 Set quartzite 8 x 14 x 8, 12 in. deep, marked 4 notches on E. and 2 on W. edges with stone mound alongside for Cor. to Secs. 4, 5, 32 & 33.

Land heavy rolling
Soil 3rd rate No Timber
Runs Westerly south on 80 chs.

N. 89° 55' E on true line bet. Secs. 4 & 33.
Var. 16° 21' E.

25.75 Spring Branch 8 lks. wide 6 in deep runs N. E. in deep Hollow.

26.00 Road runs N. E. & S. W.

40.00 Set Limestone, 16 x 10 x 6, 10 in. deep, marked 4 on N. face with stone mound alongside for 1/4 Sec. Cor.

47.50 Gulch drains N. E.

63.25 Spring Branch 2 lks. wide 4 in. deep runs N. E. in Hollow 50 ft. deep.

80.00 Set a conglomerate 12 x 12 x 12, 8 in. deep.

South Boundary Tp. 11 S., Ro. 8 E.

	marked 3 notches on E. & W. edges with	12.00
	Stone mound along side for Cor. to	
	Secs. 3. 4. 33 & 34.	80.00
	Land Mountainous slope,	
	Soil 3rd rate	
	No Timber	
	Aspen Undergrowth on 80 chs.	
	N. 89° 55' E. on true line bet. Secs. 3 & 34	
	Var. 16° 21' E.	
	Ascend	
26.00	Top of hill. Ascend.	
38.00	Enter small basin	19.00
40.00	Set Limestone 14 x 10 x 5, 9 in. deep	10.00
	marked 1/4 on N. face with stone mound	
	along side for 1/4 Sec. Cor.	
41.50	Steep descent	26.00
51.00	Low wet drains N. E.	80.00
70.00	Enter ca ñon.	
71.50	Fish Cr. 40 ft. wide 12 in. deep runs N. E.	
71.75	Telegraph line runs N. E. & W.	

BOOK-A-186

South Boundary T.6 N. R. 8 E.

72.00 D. & R. G. R.R. (P.O. Branch) Cross N. E. & S. W. access.

80.00 Set Line stone 16 x 14 x 8, 11 in. deep, marked 4 notches on W. and 2 on E. edges with stone mound alongside for Cor. to Sec. 2. 3. 34 & 35.

Land mountainous
Soil 2nd rate
No Timber

Rock ledge and open underground 80 chs.

N. 89° 35' E. on line bet. Sec. 2 & 35.
Var. 16° 21' E.

19.00 Top of steep slope 300 ft. high,

14.00 Set Line stone 16 x 10 x 8, 11 in. deep, marked 4 on N. face with stone mound alongside for 1/4 Sec. Cor.

46.00 Hollow claims N. E.

80.00 Set Sand stone 20 x 16 x 8, 15 in. deep, marked 5 notches on W. & 1 on E edges, with stone mound alongside for Cor. to Sec. 1. 2. 35 & 36.

South Boundary Tp. 11 S., Ra. 8 E.

Land rolling mountains
Soil 2nd rate
No Timber
Dense Oak undergrowth on 80 chs.

— N. 89°55' E. on true line bet. Secs. 1 & 36.
Var. 16° 21' E.

0.10 Descend steep ca 30m slope.
16.50 Road Ivans N. E. & S. W.
20.70 Beaver Cr. 10 lks. wide, 10 in. deep runs N.
ugly ca 350 ft. deep.
36.00 Top of slope.
40.50 Set Stone Stone 18X16X6, 12 in. deep,
marked 1/4 on N. face with stone mound
along side for 1/4 Sec. Cor.
80.00 The cor. to Tps. 11 & 12 S., Ra. 8 & 9 E.

Land mountainous
Soil 2nd rate
No Timber
Dense undergrowth on 80 chs.

Nov. 8, 1882

BOOK-A-186

363

South Boundary Sp. U. S. R. 8 E.

Note: For General description see Subdivisions of this Township.

A. D. Fesson
U. S. Dep. Surveyor.

BOOK-A-186 314

U. S. SURVEYOR GENERAL'S OFFICE,

Salt Lake City, Utah, June 9th 1883.

The foregoing field notes of the survey of the South Boundary of Township No 11 South Range No 8 East of the Salt Lake Meridian, Utah Territory, Executed by A. D. Perron Under his contract No 110 of the 29th day of August 1882, in the month of November 1882, having been critically examined, the necessary corrections and explanations made, the said field notes, and the surveys they describe are hereby approved.

Fred Saloudow

U. S. Surveyor General for Utah.

BOOK-A-186

R. 1883 315

Filed 187 .

Examined by John H. Caughey

Transcribed M. Hallis

Compared by

FIELD NOTES

OF

THE SURVEY OF THE

Fractional Subdivisions

of Township No. 11 S. , Range No. 8 E.

of the Salt Lake Meridian in Utah Territory.

BY

A. D. Turon

U. S. DEPUTY SURVEYOR,

Under his Contract No. 113,

dated Oct 9 1882

Survey commenced Nov 9 1882

Survey completed " 14 1882.

186-11

316

Note: This Township was surveyed on deposit made by Arthur L. Fowle for the survey of Tp 11 S., R. 9 E. having found that the quarter post of the land to which the applicant desired to gain title was situated in Tp. 11 S. R. 8 E.

BOOK-A-186

Subs. T. 4 N. R. 3 E. No. 8 E.

Survey commenced Aug 9/82
From the Cor. to Sec. 35 & 36
On the South Boundary of the
Township recently set by me
I run
North bet. Sec. 35 & 36
Var. 16° 21' E.
At Sandstone 8 x 8 x 4 6 in. deep
marked 1/4 on W. face with stone
mound along side for 1/4 Sec. Cor.
At Limestone 30 x 8 x 4, 20 in.
deep, marked 1 notch on S. & E.
edges with stone mound for
Cor. to Sec. 25. 26. 35 & 36.
Land gently North slope
Soil 2nd rate
No Timber
Dense Undergrowth on 80 chs.

Sec's. Tp. 11 S. R. 3 1/2 E. 8 E.

East on Standard Line bet.
Sec's. 25 & 36
Var. 16° 21' E.

40.00 Set temp. 1/4 Sec. Cor.
64.25 Reseand.
69.00 Bears Creek, 8 lks. wide, 6 in.
deep runs N. E.
71.25 Road trav N. E. & S. W. ascend.
76.00 Top of slope.
80.16 Intersect E. Boundary of Tp.
at Cor. to Sec's. 25 & 36, accept by
dep by me from which Pine
16 in Diam bears N. 45 W. 1 lk.
with Range variation.
40.08 Set Land Stone 9x8x8, 6 in. deep,
marked 1/4 on N. face with stone
mound along side per 1/4 Sec. Cor.
80.16 The Cor. to Sec's. 25. 26. 35 & 36.

Land gentle N. slope
Soil 2nd rate
N's Timber

BOOK-A-186

Subs. Tp. 11 S., Rs. 8 E.

Chemisia Undergrowth on 80.16 chs.

North bet. Secs. 25 & 26
Var. 16° 21' E.

11.50 Hollow drains N. E.
40.00 Set limestone 17x8x8, 10 ins. deep, marked 1/4 on W. face with stone mound 2 ditches for 1/4 Sec. Cor.
49.75 Hollow 70 ft. deep, drains N. E.
62.00 " 50 " " " N. E.
74.25 Telegraph line bears N.W. & S.E. enters Canyon
also wagon road bears N.W. & S.E.
79.00 D. & R. G. R.R. bears N.W. & S.E.
78.00 Price Ri. 120 lks. wide, 18 ins. deep bears S.E.
80.00 Set a pt. 76 lks. N. of Cor. (the True Cor. Point falling in Stream) a cond. stone 24x20x20, 16 ins. deep

Subs. Sec. 1 T. 32 S., Re. 8 E.

marked notches on S. and on E. edges of W.C. with stone mound for witness cor. to Sec's 23, 24, 25 & 26. Land mostly gentle N. slope; Soil, Sand & rock; Cor Timber Artemisia & undergrowth on 80 chs.

Eaton random line Sec's 24 & 25 Var 16° 21' E.

2.00 Sand
7.00 Ends rolling Table land.
13.45 Ended 45 ft deep drains S.
29.50 Mark drains S.
40.00 Set temp 1/4 Sec. cor.
44.50 Mark drains S.
70.00 Desert.
74.50 Bottom of Eaton, Sink and 40 lks wide, 6in deep pits on Bound
79.85 Entered N. boundary of Sec.

39.92
79.85
0.75
3.00
4.00
40.00

BOOK-A-186

Surv. T/p. 11 S. R. 6 E. 324

75.00 N. of cor to sec 2 & 35.
Recently set by me, from which
N. 89° 28' W. mag bears last sec
24 x 45, with same var.
39.92½ Set sand stone 16 x 14 x 5, 11 ins
deep, marked T/p on N. face, and
stone mound alongside, for T/p trees.
79.85 The corner to 23. 24. 25 & 26.
Land, rolling table,
Soil, Red sandy,
Ave Timber
Admissia under gross tons 79.85 chs

North bet sec 23 & 24
Var 16° 21' E.

0.75 W. B. ty secs 23. 24. 25 & 26.
5.00 Reserved.
8.00 Enter rolling Table land
40.00 Set Lime stone 20 x 14 x 5, 15 ins.
deep marked T/p on W. face with stone
mound alongside for T/p Sec. Cor.

Sub. 7 N. 11 E. Sec. 32 8 C.

71.00	Wagon road from W. to E. of record.
80.00	Set Limestone 12 x 8 x 8, 3 in. deep marked 3 notches on S. and on E. edges and raised a stone mound alongside for Cor. to Sec. 13. 14. 23 & 24.
	Land mostly rolling table
	Soil 1st rate
	No Timber
	Artemisia Underbrush on 80 chs.
	Easton sandstone line bet. Sec. 13 & 24 Var. 16° 21' E.
7.50	Ravine 25 ft. deep, drains S.
13.26	Wash drains S.
17.50	Ravine 25 ft. deep drains E.
25.50	" 50 " " " "
44.00	Set temp. 1/4 Sec. Cor.
47.00	Dry Gulch 75 ft. deep drains S.E.
80.20	Intersect E. Boundary of Sp.

40.10

80.20

Nor

BOOK-A-186

323

Surv. of T. 1 N., R. 8 E.

2 Chs. N. of Cor. to Sec. 13 & 24
Record & set by me. From which
N. 89° 54' W. on true line bet. Secs.
13 & 24, with same variation.

40.10 Set Sandstone 14x10x6, 9 in. deep
marked 1/4 on N. face with stone
mound alongside for 1/4 Sec. Cor.

80.20 The Cor. to Secs. 13, 14, 23 & 24
Sand rock broken S. spurs
of main Mountains
Soil 3rd rate
Timber scattering scrub Cedar
and Pine.
Mound stones on 80.20 Chs.

Note: On account of high mountains I
abandon the line here.
From the Cor. to Secs. 34 & 35
on the S. Boundary of T.
set by me
North bet. Secs. 34 & 35

1.
1
1.
W.
S.
E.
531.
marked
1/4 Cor.
Timber

Subs. T. 11 S., R. 32 E.

Cor. to 21 & E.

15.00 Rock Gulch heads E.

37.50 D. & R. G. R. R. (V. V. branch) bears N. E. & S. W.

39.00 Telegraph line bears N. E. & S. W.

40.00 Set Line stone 16 x 8 x 8, 11 in. deep marked 1/4 on W. face with stone mound alongside for 1/4 sec Cor.

53.00 Telegraph line bears N. W. & S. E.

53.00 Lone R. R. " " "

59.50 " " " " N. E. & S. W.

60.50 Telegraph line " " "

65.00 Rich Cr. 50 lks wide 2 ft. deep runs N. E. leave canon flat.

77.00 Enter canon flat.

80.00 Set Line stone 16 x 10 x 8, 11 in. deep, marked 1 notch on S. and 20 on E. edges with stone mound alongside for Cor. to sec. 26. 27. 34 & 35.

BOOK-A-186

3705

Sub. No. 11 T. 4 Ra. 8 E.

Land mostly Rolling Cañon Soils
Soil 1st rate No Timber
Denver Mudergs south on 80 chs.

Easterly random line bet. Sec. 26 & 35
Var. 16° 21' E.

3.00	Telegraph line bears N. & S.
3.75	D. & R. G. R. R. (Pl. V. Branch) bears N. & S.
5.70	Fish Creek 50 lks. wide 2 ft. deep runs N. ascend
18.00	Top of slope
40.00	Temp. 1/4 Sec. Cor.
74.00	Gulch draining E.
80.00	Intersect N. & S. line at Cor. to Sec. 25. 26. 35 & 36 from which Pine on true line bears Sec. 26 & 35 with same var.
42.00	Set Lime Stone 18 x 8 x 8, 12 ins. deep, marked 1/4 on N. face with stone mound along side for 1/4 Sec. Cor.
80.00	The Cor. to Sec. 26. 27. 34 & 35

Rubs. Tp. 11 S., Ro. 8 E.

Sand rolling log & brush
Std 2nd rate
No Timber
Some Cedar growth on 80 chs.

Creek bet Sec. 26 & 27.
Ban. W. & E.

4.50 Mouth of bottom heads W.
6.00 2 Cabins bear E. 3 chs dist.
7.00 Corral & fence bears N.W. & S.E.
9.00 " " " N.E. & S.W.
13.50 Road bears N.W. & S.E.
23.00 " " " " "
25.00 Old creek bed bears N.W. & S.E.
Cedar above Williams
30.00 Old creek bed bears N.E. & S.W.
31.20 Road " " " "
35.00 " " N.W. " S.E.
36.50 Old creek bed " " " "

BOOK-A

Sub

40.00 N
"
"
"
45.00 C
"
52.50
55.10
"
65.10
"
78.80
80.00

BOOK-A-186

Subs. Tp. 11 S., Ra. 8 E.

40.00 Near old willow withy-up
Set Pine stone 16×10×8, 11 in dep,
marked T Ken W, Jan with stone
mound along side for 1/4 sec cor.
45.00 Telegraph line bears N.W. & S.E.
and Old Cart Rd " N.E. & S.W.
" " " " N.W. & S.E.
52.50 " " " " N.W. & S.E.
55.10 L & R. Ry. R.R. (Old R. bed) bears N.W. & S.E.
The Junction of Price R. & Fish Cr. John E.
65.10 Price River 50 lks wide 12 in dep runs S.E.
Thence along river bends.
78.80 Price R. 50 lks wide 12 in dep bears N.W.
80.00 Pine stone 16×10×10, 11 in dep marked
2 Notches on S. & E. edges, with stone
Mound along side for Cor. Sec's.
22, 23, 26 & 27.
Land bottoms,
Cool, Shrubs
No Timber
Some Adventitious Willows on Beds.

Timber

Lubs. Jg. 11 S. 1 Ko. 8 Ea.

	Center pavement line left Ave	2	
	23 & 26.	3	
	Ca 16 & 21 C.	4	40.
0.65	S & R. C. & R.R. near N & D.		
1.55	Telegraph line " " around		
6.50	Top of Bluff.	4	
38.00	Ascend gradually	4	80.00
40.00	Set temp. 14 Rec cor.	5	
43.50	Telegraph line near N.E. & D.	6	
44.00	L. & R. C. R.R. " "		
45.00	Pine River 90 lks wide 18 in deep	7	
	runs N.E. around	7	
50.00	Top of Slope	7	
73.00	Enter bottom, Wagon road near	7	
	N.W. for 2 C.	8	
75.30	Telegraph line near N.W. & E.		
75.85	R. R. " " runs S.E.		2.10
79.00	Pine river 60 lks wide 2 ft deep		2.40
82.00	Intermit N & S line at cor		13.
	to Sec 23. 24. 25. & 26 from which		

BOOK-A-186

329

Subs Tp. 11 S. R. 6 E.

West on line bet. Secs.
23 & 26. with rem. var.

40.00 Pt. line Stone 14 x 12 x 5, 9 in
Bks, marked 1/4 on N. face
with Wms. mound alone Sec. 26
for 1/4 Sec. Cor.

80.00 Pt. cor to Secs. 22, 23, 26 & 27,
Land rolling & rocky Slopes,
Oak 2nd rate
No Timber
Dense Undergrowth & Willows
growth on Soil.

North bet. Secs. 22 & 23.
Var 16° 21' E.

2.00 Dg R. & G. R. R. bears N.W. & E.
2.75 Telegraph " " " Abend
13.00 N. gable end depot Pleasant
Valley Junction bears N 79° W.

Surv. Tp. 11 S., R. 380 E. & E.

Tank bears N. 62° 15' W.
" S. 79° 55' W.

20,00 Gulch near Summit, heads E. 8 chs.
21.17 Gulch near Summit, heads E. 8 chs.
30.20 Bridge Road bears N.W. 5 D.E.
40,00 Set lime stone 14x10x8, 9in deep
marked 1/4 on N. face mitt
Stone mound alongside for 1/4 Sec cor.
N. 40 rds and depot bears S. 20° 21' W.
50,50 Mark 15 feet deep drain
78.80 Road below drain
82,00 Set sand stone 24x12x6. 18in deep
marked 3 Notches S. 5 rds E. edges
mitt Stone mound alongside, for
cor to Secs 14, 15, 22 & 23.
Land Mountainous;
Soil Sandy,
No Timber
Some cedar on 80 chs.

3,00
17,00
27,00
28.00
35,00
40,00
45,75
74,50
80.00
40,00
80,00

BOOK-A-186

38

Subs. Tp. 11 S. R. 8 E.

Easton and on bdy bet Secs 14 & 23.
Subs 16 & 21 E.

3.00 Around
17.00 Top of Hill bears N.E. & dist.
Around
27.00 Enter Hollow drains S.E.
28.00 Road bears N.W. & S.E.
35.00 Around.
40.00 Set bdy. 1/4 Sec cor,
45.75 Ended 50 ft Hollow drains S.E.
74.50 Drains 40 " " " S.
80.00 Intersect N & S bdy of Secs 14 & 23
13.14 23 links from which
Easton and bdy bet Secs 14 & 23.
Pacific Railroad.
40.00 Set Stone 16 x 12 x 3 ins mark,
marked 1/4 on N. face with stone
mound for 1/4 Sec cor.
80.00 Reach Sec 14. 15. 22 & 23.
Land, mountain,
Soil Indurate,

Subs. Tp. 4 S., Rs. 8 E.

392

Finches a few scattering Cedar
Mountains one 80 chs.

North dist Dec. 14 & 15
Va 16° 21' E.

		24.50
1,75	Main road bears N.E. Dr.	
4.75	Dup. wash, heads N.E.	40.00
10,00	Pond main Mountains	
25,00	Foot of clip. Bluff therefore.	68.50
— 40,00	Bing in summit,	80.00
	at 25 chs. — 15 ch. L. of true	
	Point of Sine Vein 14 × 8 × 8,9m	
	Dep, marked Von Ogan & N. C.,	
	for witness & Mineral.	

Note: Abandon this here.
Land, mountains.
Dail Indicate
Ore Finder
Mountainous on Rocks. Nov 10/82

BOOK-A-186

Subs. T. 5 N., R. 8 E.

From the Cor. to Sec. 33 & 34 on the S. boundary of the Tp. Recently set by me I run North Bet. Sec. 33 & 34 Jan. 16 21 E.

24.50 Spring Branch 8 lks. wide 6 in. deep, runs N. E. in deep cannon.

40.00 Set Limestone 12 x 10 x 6, 8 in. deep, marked 1/4 on W. face with stone mound for 1/4 Sec. Cor.

68.50 Deep Gulch drains N. E.

80.00 Set Limestone 16 x 16 x 5, 12 in. deep marked 1 notch on S. and 2 on E. edges with stone mound alongside for Cor. to Sec. 27, 28, 33 & 34

Land heavy rolling

Soil 1st. Rate

Timber

Dense Oak and Artemisia

Undergrowth on 80 Chs.

Subs. Twp. 11 S., Rs. 8 E.

Easton sandstone line bet. Sec. 27 + 34
Var. 16°21' E.

13.50 Dry Gulch draws N. E.
40.00 Set temp. 1/4 Sec. Cor.
79.50 Dry Gulch draws N. E.
77.50 Enter Fish Creek Bottom.
80.00 Intersect N. & S. line 9 lks. N. of Cor. to Sec. 26. 27. 34 + 35. from which N. 89°22' W. on true line bet. Sec. 27 + 34 with same variation.
40.00 Set Limestone 14 X 10 X 5", 9 in. deep, marked 1/4 on N. face with stone mound along side for 1/4 Sec. Cor.
80.00 The Cor. to Sec. 27. 26. 23 + 34.
Land heavy rolling
Soil 2nd rate No Timber
Dense Sage Brush Undergrowth on Rocks.

North bet. Sec. 27 + 28
Var. 16°21' E.
18.50 Road in deep Gulch trav. N. E. & S. W.
40.00 Set Limestone 16 X 10 X 4, 11 in. deep marked

48.00
66.75
73.00
80.00
18.75
31.00
39.60
40.00

BOOK-A-186

335

Twp. 4 N., R. 8 E.

	1/4 on W. pass with stone mound along side for 1/4 Sec. Cor.	31.
48.00	Hollow drains E.	
66.75	Road leads N.E & S.W. in Hollow.	nd
	drains N. E.	
73.00	Road, in Hollow, drains E.	E.
80.00	at lime stone 16x11x7, 11 in. deep, marked 2 notches on N. + 3 on E edges with stone mound along side for Cor. to Sec. 21, 22 27, 28 Land hilly soil 2nd rate	1 W. 1 S. do 1 E. 1 E
	No Timber	
	Since at tenuecia Independent on 80 chs.	to Town
	East on random line bet. Sec. 22 & 27 Var 16° 21' E.	16 31.
18.75	Road in hollow drains N.E.	, marked 1 Mile cor.
31.00	Ridge 100 ft. high bears N & S.	
39.00	Road bears N & S. Enter Flat.	, No Timber
40.00	At Tenaspon Sec. Corner,	do.

Subs. Tp. 11 S., Ra. 8 E.

73.00	Summit of Hollow heads S.W.	23.75
34.50	Mound bears N.E. & S.W.	39.20
77.75	Pine Knee, 30 lks. scribe, 2 pl. deep, bears S.E.,	40.00
78.20	D. & R.G.R.R. (P.V. branch) bears N. & S.	
80.00	Intersect N. & S. limit of Cor. to Sec. 22, 23, 26 & 27	43.00
	Same which Section line bet. Sec. 22 & 27 with same variation.	47.00
40.00	Set limestone 17x8x4 in. deep marked	59.50
	1/4 cor. N. face. with stone mound along	61.00
	scribe for the Sec Cor.	
80.00	The Cor. to Sec. 21, 22, 27 & 28	78.80
	Land falling Beech,	72.00
	Soil 2nd rate	77.00
	No Timber	79.25
	Base Alternate Meridian 80 chs.	80.00
	North bet. Sec. 21 & 22	
	Var. 16° 2' E.	
9.25	Hollow 50 ft. deep drains E.	
10.15	Road bears E. & W.	

BOOK-A-186

837

Lake Sp. T. 2 S., R. 8 E.

23.75	Hollow 5 ft. deep drains E.
39.20	Road runs E & W.
40.00	Set limestone 18x10x6, 12 in. deep, marked 1/4 on W. face with stone mound along side for 1/4 Sec. Cor.
43.00	Hollow 6 ft. deep drains N. E.
47.00	Road runs N. E. & S. W.
59.50	" " E & W.
61.00	Spring Branch 15 lks. wide 10 in. deep, runs E. in hollow 50 ft. deep, width 2 lks. W.
70.80	Telegraph line runs N. W. & S. E.
72.00	S. F. & S. G. R. R. " " "
77.00	Wagon road " " "
79.25	Creek 50 lks. wide, 8 in. deep, runs S. E.
80.00	Set limestone 26x12x3, 18 in. deep, marked 3 notches on S. & E. edges, with stone mound along side for Cor. to Secs. 16, 21 & 22.

Land rolling

Soil 2nd rate Title No Conflict

Timber artificial Undergrowth none

Subs. N. 11 C. Re. & E.

BOO

Dalton Landon Iron Cut Rec'd 15 22 Var 16° 21' E. 80,50

2,10	Rice R. Holk wide, 12in deep runs N.E.	(
3,25	" " " " " " " " " S.E.	40,25
5,15	" " " " " " " " " N.E.	
6,50	" " " " " " " " " S.E.	
8,80	" " " " " " " " " N.E.	80,50
13,25	" " " " " " " " " S.E.	
15,00	" " " " " " " " " N.E.	
16,00	" " " " " " " " " S.E.	
16,80	Top of River bank 12 ft high.	
17,05	Road bears N.W. & S.E. ground.	
27,50	Spring Branch 15 ft wide 2in deep runs S.W.	
40,00	Set Temp. St Decor,	20,95
43,00	Hollow drains R. 15 ft deep	40,00
57,00	" " S.W. 15 " "	
60,50	" " S.W. 40 " "	
66,90	" " S. 15 " "	55,75
72,25	" " S.W. 40 " "	71,00
78,00	Road bears N.E. & S.W.	77,00

BOOK-A-186

BOOK-A-186

Subs. Tp. 1 S. R. 8 E. 339

80.50 Intersection highline at cor to Sec 5 & 8 T. 1 S. R. 2 E. & 3 E. from which Quarter Sec on ~~line~~ line bet Secs 5 & 8 bears West 20 links bet Secs 5 & 8 T. 1 S. R. 2 E. & 3 E. with same variation.

40.25 Set Sand Stone 16 x 10 x 5, 11 in deep marked 1/4 on W. side with stone mound along side for 1/4 Sec. cor.

80.50 Meander to Sec. 5, 6, 7, & 8 T. 1 S. R. 2 E. & 3 E. Land, rolling Mountains, Loam Soil Sandstone, no Timber Mountains on ~~80.50~~ chs. Variation 11° E.

South bet Secs 5 & 6, Va 16° 21' E.

20.95 Road bears N. & S. E. & W.

40.00 Set limestone 16 x 12 x 4, 11 in deep, marked 1/4 on W. face, with stone mound along side for 1/4 Sec. cor.

55.75 Hollow 70 ft deep, drains N.

71.00 " 20 " " " "

77.00 Enter flat bear E. & W.

Subs. Nr. 11 T. 3 N. R. 8 E.

80.00 Set Sandstone 24X6X4, 18 in. deep
marked 4 notches on S. and 3 on E.
edges with stone mound alongside
for Cor. to Sec. 9, 10, 15 & 16

Land heavy rolling
Soil 2nd rate
No Timber

Dense willow & alder swale in the north
on 80 chs. 16.00 37.00 4.00

Easton Traverse bet. Secs. 10 & 15 63.50
Nov. 16th 21' E 67.00

7.00 Leave Stat. Ascend 80.00
40.00 Set Sandstone 11X10X7, 6 in. deep, marked
1/4 on N. face with stone mound
alongside for 1/4 Sec. Cor.

Note. I discontinue line on account
of unavailable Mountains.

Land Mountainous
Soil 2nd rate No Timber

BOOK-A-186

Surs. Tp. 11 S., R. 8 E.

Mountainous on 40 chs.

From the cor to sec. 32 & 33 on S. boundary of Tp. recently set by me & run North bet. Secs 32 & 33.

Va 16° 21' E.

16.00 Hollow (flat) drains N.E.

37.00 Road in hollow drains N.E.

40.00 Set Linn stone 14×14×7, 9 in dep, marked for W. cor with stone mound for 1/4 sec cor.

63.50 Road bears S. & W. in Gulch drains E.

67.00 Road bears N. & W.

80.00 Set Linn stone 18×10×3, 12 in dep, marked Notch on S. & on E. edge, with stone mound alongside for cor to secs 28, 29, 32 & 33.

Land rolling, soil sandy

No Timber;

Alpine & Jack pine undergrowth on 80 chs.

Subs. Tp. 11 S., Rg. 8 E.

Bdy. Commandon's line bet. Secs. 28 & 33
Va. 16° 21' E.

7.25 Road bears N.E. Mer.
8.25 " " N. & S.
21.00 " " N.E. Mer.
33.00 Gulch runs N.E.
40.00 Set limestone & mound.
67.00 Road in gulch bears N.E.
80.45 Intersect stone line set to dec. Secs. 27, 28, 33, & 34
from which Weston Range line bet. Secs. 28 & 33
with Range variation.
40.22½ Set limestone 14×10×5, 9 in deep, marked
Mon. N. Pass, with stone mound & pit on E. side
80.45 Tree cor. to Secs. 28, 29, 32 & 33.
Sandstone, soil and rock. No Timber
Oak sapling, underscored on 80.45 chs.

North bet. Secs. 28 & 29
Va. 16° 21' E.

26.50 Road bears N.E. & S.W.
40.00 Set sandstone 16×8×5 in deep, marked 1/4 Mon

11.50	
40.00	
43.25	
80.08	
40.04	
80.08	

BOOK-A-186

Subs. Sp. 1, T. 3 N., R. 8 E.

W. Jan, with Stone mound, Pos. & Tree cor.

20.00 Rolling stone 18×7×5, 12in dup, marked 2 notches on E. and 4 on S. edges, with Stone mound alongside for corr. Dec. 20, 21, 28 & 29. Set bottom 75 ft dwn, drains South-Easterly.

Land, rolling, soil Subsoil, Hard timber Americia, undergrowth Scrub.

East on random line, bet. Dec. 21 & 28 Pos. 21, E.

14.50 Bottom 75 ft dup drains N.E.

40.00 Pos. Temp. & Tree cor.

43.25 Road bears N.E. & S.W.

88.08 Intersect N. bdy. Sec. 31 Rk. & Pos. for cor. to Secs. 21, 22, 27 & 28. Iron marked C. S. N. 89° W. 87.00 chs. Continue line bet. Secs. 21 & 28 with same variation.

40.04 Set stone Stone 16×10×8, 11in dup, marked S. 21, Jan, with Stone mound for & Tree cor.

80.08 Set corner Dec. 20, 21, 28 & 29.

Hard Timber

Auth: Tp. 11 S., Ra. 8 E.

Sand, rolling; Soil, 3rd rate; No Timber

Artemisia undergrowth on 80.08 chs.

Survey 13/82

Southeast Sec. 20 & 21, Va. 16° 21' E.

19.70 Hollow drains N.E.

25.40 Road bears N.E. & W.

38.50 Same " " NW & S.E.

40.00 Set brass stone 16×14×3, 11 ins dup. marked 1/4 Sec. 20 & 21 with stone mound for 1/4 Sec. cor.

42.00 Flat hollow drains N.E.

46.75 Road bears N.E. & W.

60.20 " " NW & S.E.

54.25 " " N.E. & W.

79.50 Spring branch 15 lks wide, 16 ins deep, runs S.E.

80.00 Set sand stone 16×12×8, 11 ins dup, marked 1/4 Sec. cor. 20 & 21 with stone mound alongside, Pos. corner Sec. 16, 17, 20 & 21

Land, rolling; Soil 2nd rate; No Timber

Sec. 17 underbrush on 80 chs.

BOOK-A-186

Subs. Tps. 11 S., Rs. 8 & 9 E.

Boston random line last Dec. 16 & 21.

T. 16 S., R. 9 E.

6.00 Road bears N.W. & S.E.

7.25 Road bears " " around

36.00 Post hollow drains S.

34.00 S. point of ridge 50 ft. high.

40.00 Set stump 1/4 Reas.

61.00 Mouth of hollow bears N.W.

74.20 Telegraph line bears N. & S.

74.80 Rail-road " " do

and wagon road bears NW & SE.

78.50 Rico R. 50 lks wide, 8 in dep., runs SE.

80.00 Intersect N. & S. line 35 lks N. of cor. to

Secs. 15, 16, 21 & 22 from which Cor.

N. 89° 45' W. on true line last Dec. 16 & 21

with same variation.

40.00 Set stone 16 x 9 x 4, 11 in dep., mar.

Rs N. Jay, with stone mound for 1/4 Sec.

80.00 Quarter Sec. Cor. 16, 17, 20 & 21.

Sand Rolling; Soil 2nd rate, Dark

Asbestos in many parts to 80 chs.

Lots. 7, 11 & 12 Sec. 8 E.

North bnd. Dec. 16 x 17
Va 16° 21' E.

2,00 Road bears Eg W.
5.75 " " N.W., D.H. accnt.
11.50 " " N.E.
21.50 Enter hollow drain E.
22.50 Road bears Eg W. accnt.
40.10 R.R. Lines down 12x9x6, 8in. dupl.
Marked 1/4 on W. Pass with Stone mound for
48.00 Hol. Cor drains N.E. 60 ft duk
60.50 " " E. do.
78.00 Road bears E & N.
80.10 R.R. Lines Stone 22x10x5, 16in duk,
Marked Hotchkiss S.C. Edge with Stone
mound alongside. Sec. 8 Dec. 8. 9. 16 & 17.
Sandpeeling; Pole Cor. oak;
do Pointers
Artemisia undergrowth 80 ch.

Eastern and Western line last bnd. 9 & 16.
Va 16° 21' E.

BOOK-A-186

Subs. Sp. 1 T. 34 N. R. 8 E

13.00	Road bears N.E. & S.W.
23.70	" " N.W. & S.E.
24.20	Telegraph line bears N.W. & S.E.
25.00	D. & R. G. R.R. " do.
40.00	Enter bottoms Set temp. Mon. cor.
45.20	Rico R. 30 lks wide, Bindy. runs N.W.
50.85	Road bears N.W. & S.E. as cond
59.00	Small hollow drains S.W.
64.00	Ridge top & high bears N.E. & S.W.
68.00	Cond flat hollow.
80.00	Intersect S. Line at cor to Secs 9, 10, 15 & 16 from which Bears West on true line but Secs 9 & 16. Spruce Pine var.
40.00	Set Cobble stone 16 x 10 x 4, 11 in dust, 1/4 in cor marks N. on N. face, with Mound of stone for ∧
80.00	The cor to Secs 8, 9, 16 & 17, Can't scribing, Set 2nd Note, Nov. 1882; Artemisia & willow undergrowth

Note: On account of unavailable mountainous ridges abandon further survey in this Township Nov. 11th 1882

80 chs.

General Description

The surveyed part of this Township embraces the bottoms along Fish Creek and Price River, two beautiful mountain streams, and adjoining bench lands.

There is a settlement in Sec. 24, S. 1/4 N. 1/4 one, in Sec 26, and a town of S. 1/4 about 100 inhabitants in Sec 22, called "Fish Creek" or "Pleasant Valley Junction" (Where Gilpin & Towle the applicants for Survey reside) "Post Office" from the Pleasant V. Branch and Main Line of the Denver & Rio Grande R. R. Connect - Besides the above enumerated streams, there are several other beautiful Spring Creeks in this Township

A. D. Pierson

U.S. Dep. Surv.

12.
20.
30.
33.
40.
44.
76.
78.
80.

BOOK-A-186

349

U. S. SURVEYOR GENERAL'S OFFICE,

Salt Lake City, Utah, June 9th 1883.

The foregoing field notes of the survey of the

Fractional Subdivisions

Township No 11 South Range No 8 East

of the Salt Lake Meridian, Utah Territory,

Executed by A. D. Feron

Under his contract No 113.

of the 9th day of October 1882

in the month of November 1882

having been critically examined, the necessary corrections and explanations made, the said field notes, and the surveys they describe are hereby approved.

Jno Salomon

U. S. Surveyor General for Utah.

BOOK-A-186

Township 11 S. R. 9 East

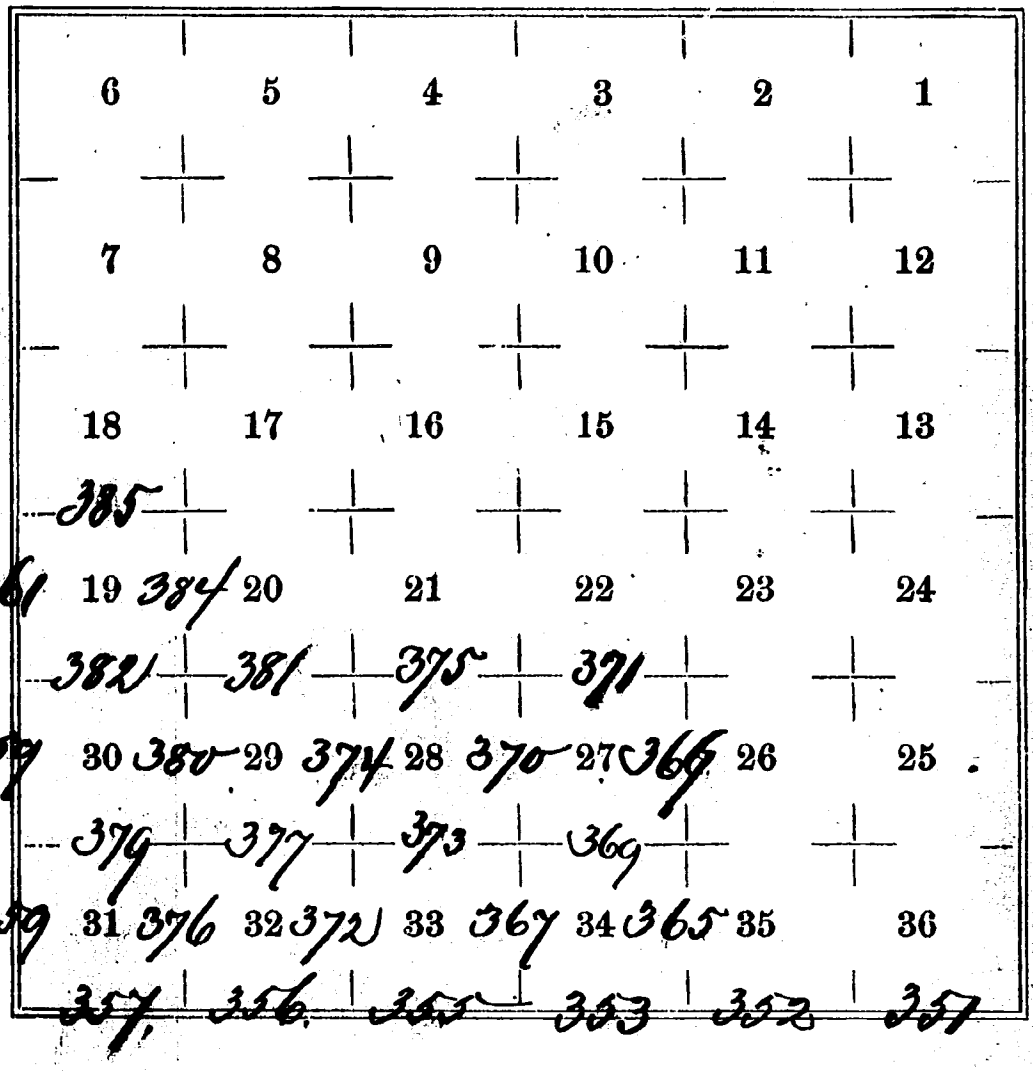

BOOK A-186
R: 1883. 350

Filed 187 .

Examined by John H. Dingee
Transcribed by Mr Chastis
Compared by

FIELD NOTES

OF

THE SURVEY OF THE

South and West fractional Boundaries

of Township No. 11 South, Range No. 9 East

of the Salt Lake Meridian in Utah Territory.

BY

A. L. Perron

U. S. DEPUTY SURVEYOR,

Under his Contract No. 110

dated August 29th 1882.

Survey commenced Nov. 1st 1882.

Survey completed " 2nd " 1882.

186-12

BOOK-A-186

South Boundary Tp. 11 S., R. 9 E.

Survey commenced Nov. 1st 1882
from the established Cor. to Tps.
10 & 11 S. Rs. 9 & 10 E. being a
sandstone 48 x 14 x 3 ins.
permly set with stone mound
alongside Drum
West on true line bet. Secs. 1 & 36
Var. 16° 21' E.

12.75' Ridge bears N. & S.
20.00 Hollow 50 ft. deep drains S.
30.00 Ridge 75 ft. high bears N. E. & S. W.
33.00 Enter heavy sagebrush flat.
40.00 Set sandstone 16 x 6 x 4, 10 in.
deep, marked 1/4 on N. face with
stone mound along side for 1/4 Sec.
Cor.
44.25' Hollow 75 ft. deep drains S. W.
56.00 A spring about 6 chs. S. runs W.
78.50 Wash drains S. W.
80.00 Set sandstone 22 x 14 x 6, 16 in. deep.

South Boundary T. 2 S., R. 7 E.

marked 1 stake on E and 5 on W. edges with stone mound alongside for Cor. to Secs. 1, 2, 35 & 36

Land rolling

Soil 1st rate

No Timber

Venus Artemisia Hudsonia &c.

West on true line bet. Secs. 2 & 35

Var. 16° 21' E.

22.25 Road bears N. W. & S. E.

23.50 Spring Branch 3 lks. wide 6 in. deep runs S.

26.00 Same road bears N. & S.

30.00 Ascend

35.00 Ridge 25 ft. high bears N. & S.

40.00 Set Line stone 18 x 16 x 6, 12 in. deep, marked 1/4 on N. face with stone mound along side for 1/4 Sec. Cor.

43.00

62.00

80.00

16

23.

26.

36

40

BOOK-A-186

B 553

North Boundary T. 11 S., R. 9 E.

43.00	Enter Lage Rock flat
62.10	Same road runs N.W. & S.E. Ground
80.00	Top of slope. Set Sandstone
	36 x 24 x 4, 18 in. deep, ennabed 2
	notches on E. and 4 on W. sides
	with stone mound along side for
	Cor. to Sec. 2. 3. 34 & 35
	Land rolling
	Soil 1st rate
	No Timber
	Dense artemesia Sagebrush on
	80 chs.
	West no true line Sec. Sec. 34 & 34
	Var. 16° 21' E.
16.00	Enter Cove opens S.
23.50	Leave same.
26.00	Enter Cove opens S.
36.00	Leave same
40.00	Set Lime stone 15 x 10 x 6, 10 in. deep

883

the

South Boundary Tp. 11 S., R. 9 E.

	marked 1/4 on N. face with stone mound alongside for 1/4 Sec. Cor.	
62.10	A tone Cedar brs S. 75 lks. dist.	
67.00	Descend	11.00
76.00	Cañon road brs N. & S.	12.00
76.05	Horse Creek 15 lks. wide 4 ft. deep runs S. in bottom of cañon 300 ft. deep.	40.00
80.00	Set Sand stone 36 X 12 X 12, 18 in. deep, marked 3 notches on E. & W. edges with stone mound alongside for Cor. to Sec. 3. 4. 33 & 34.	73.00
		80.00
	Land Mountainous	
	Soil 3rd rate	
	No Timber	
	Mountainous & Undergrowth on 80 chs.	

BOOK-A-186

South Boundary Twp. 11 S., R. 9 E.

West on line bet. Sec's. 4 & 33

Var. 16° 21' E

Ascend

11.00 Top of Slope.

12.00 Bluff Bench bears N. 47° 29' E.

40.00 Set line stone 18 x 12 x 5; 12 ins. deep, marked 1/4 on N. face with stone mound along side for 1/4 Sec. Cor.

73.00 Descend

80.00 Marked Stat. Quarry Sandstone 4 x 2 x 2 ft. above ground, 4 notches on E. and 2 on W. edges, with stone mound on top for cor. to Sec's. 4. 5. 32 & 33.

Land mostly high Bench

Soil 2nd rate

No Timber

Artemisia tridentata on 80 chs.

Nov. 1st 1882.

356.

South Boundary Sec. 1 T. 1 S., R. 9 E.

West on this line bet. Sec. 5 & 32
Var. 16° 21' E.

10.10 Telegraph line bears N.W. & S.E.
11.45 D & R.G.R.R. bears N.W. & S.E.
13.50 Rice Creek 10 lks. wide, 18 in. deep, runs S.E. in cañon 500 ft. deep.
Ascend.
21.00 Trail on open ridge bears N.W. & S.E.
40.00 Set Linn stone 17 x 10 x 4, 11 in. deep, marked 1/4 on N. face with stone mound alongside for 1/4 Sec. Cor.
49.50 Beans ranch bears N. 76° 40' E.
51.00 Top of slope
80.00 Set Linn stone 16 x 10 x 5, 10 in. deep marked 5 notches on E. and 1 on W. edges with stone mound alongside for Cor. to Sec. 5. 6. 31 & 32.
Land high cañon slopes.
Soil & rock stale
No Timber

South Boundary Sp. T. 4 S., R. 9 E.

Mountainous and dense Undergrowth on 80 chs.

West on this line Bet. Sec. 6 & 31
Var. 16° 21' E.

19.25	Hollow 100 ft. deep, drains N.
40.00	Set Limestone 18x18x6, 12 in. deep marked 1/4 on N. face with stone mound along side for 1/4 Sec. Cor.
56.00	Descend.
62.50	Spring Branch 3 chs. wide 6 in. deep runs N. E. in canon 300 ft. deep.
	Ascend.
71.00	Top of slope.
77.72	Allowing for convergency of meridians Set Limestone 26x18x6, 18 in. deep, marked 6 notches on N. E. S. & W. edges with stone mound along side

358

South Boundary Tp. 11 S., Re. 2 E.

for Cor. to Tps. 11 & 12 S., Rs. 8 & 9 E.

Land mostly high Bench.

Soil 2nd rate

No Timber

Mountainous on 15 chs. and

Artemisia Undergrowth on 77.72 chs.

160.

80.0

5.

BOOK-A-186

West Boundary Tp. N.S., Ro. 9 E.

From the Cor. to Tps. 11 & 12 S., Ros 8 & 9 E. Dran

North bet. Secs. 31 & 36.

Var. 16° 21' E.

1.00 Set a mine stone 14 x 12 x 4, 9 in. deep, marked 1/4 on W. face with stone mound along side for 1/4 Sec. Cor.

80.00 Set Lime stone 16 x 9 x 4, 10 in. deep marked 1 notch on S. and 5 on N. edges with stone mound along side for Cor. to Secs. 25, 30, 31 & 36.

Land high rolling Bench

Soil 2d rate

No Timber.

Dense Oak and Aspen Underground on 80 chs.

North bet. Secs. 25 & 30

Var. 16° 21' E.

5.00 Descend

West Boundary Tp. 11 S. R. 9 E.

9.30	Road bears N. E. & S. W.
10.25	Beaver Creek 8 lks. wide, 6 in. deep, runs N. E. in Canyon 50 ft. deep.
11.25	Ascend.
15.50	Top of Bluff.
24.50	Road bears E. & W.
31.50	" " N. W. & S. E.
32.30	Telegraph line bears E & W.
33.00	D & R. G. R. R. bears E & W.
34.50	Cabin bears E. 4 chs. dist.
34.75	Road bears E & W.
35.60	Price R. 60 lks. wide, 2 ft. deep runs S. E. Ascend.
40.00	Set Limestone 16X10X5, 10 in. deep, marked IX on W. face with stone mound along side for 1/4 Sec. Cor.
41.15	Top of Bluff.
58.50	Ascend.
66.00	Top of slope.
72.00	Descend

BOOK-A-186

West Boundary Tp. 11 R. 9 E.

80.00 Set Sandstone 8X16X3, 12 in. deep, marked 2 notches on S. & 4 on N. edges with stone mound alongside for Cor. to Secs. 19. 24. 25 & 30.

Land Mountainous

Soil 3rd rate

No Timber

Some attempt in Hardwood on 80 chs.

North bet. Secs. 19 & 24

Dec. 16° 21' E.

7.00 Spring Branch 4 lks. wide 3 in. deep, in Hollow runs S. W.

26.30 Road runs N. W. & S. E.

33.50 Wash drains S. E.

37.50 Same drains S. W.

40.00 Set Sandstone 24X16X10, 18 in. deep, marked 4 on W. face with stone mound alongside for 1/4 Sec. Cor.

41.50 Same Wash drains S. E.

West Boundary Tp. 1 S. R. 9 E.

59.00	Foot of high Mountains bears N. W. & S. E.
68.00	Ravine 50 ft. deep, bears S. W.
80.00	Set Sandstone 20x16x14, 15 m. deep, marked 3 notches on N. & S. edges with stone mound along said line for Cor. to Sec. 13. 18. 19 & 24. Land rolling & Mountains Soil 2nd rate Generastemisia Undergrowth on 80 chs.

Note: On account of high Mountains I abandon line here.

Nov. 2nd 1882.

Note: For General description see end of sub. divisions of this Township.

A. D. Fesson
U. S. Dep. Surveyor

BOOK-A-186

363

U. S. SURVEYOR GENERAL'S OFFICE,

Salt Lake City, Utah, June 9th 1883

The foregoing field notes of the survey of the fractional *South and West Boundaries*

Township No 11 S. *Range No* 7 E.

of the Salt Lake Meridian, Utah Territory,

Executed by A. D. Ferrol

Under his *contract No* 110

of the 29th *day of* August 1882

in the month of November 1882

having been critically examined, the necessary corrections and explanations made, the said field notes, and the surveys they describe are hereby approved.

Frk Salomon

U. S. Surveyor General for Utah.

BOOK-A-186
R.: 1883

364

Filed 187 .

Examined by Jno. H. Conyers
Transcribed Michaelis
Compared by Benj. R. Stevenson & Michaelis

FIELD NOTES

OF

THE SURVEY OF THE

Fractional Subdivisions

of Township No. 11 S. , Range No. 9 E.

of the Salt Lake Meridian in Utah Territory.

BY

A. Dunn

U. S. DEPUTY SURVEYOR,

Under his Contract No. 113,

dated Oct 9 — 187 2.

Survey commenced Nov. 3rd 187 2.

Survey completed " 7th 187 2.

186-13

BOOK-A-186 365

Subs. Sp. U.S. / Ko. 9 E.

Survey commenced Nov 3rd 1882
From the established Cor. to
Sec's 34 & 35 on S. Boundary of
Sp. 101 by me recently
Bears North bet. Sec's. 34 & 35,
Var. 16° 21' E.

Descend.

17.25 Foot of slope, Enters Brush.
18.00 Road bears N.W. & S. E.
10.00 Set Sandstone 10x10x6, 6 in. deep,
marked 1/4 on W. face with
stone mound along side for
1/4 Sec. Cor.
80.00 Near foot of high mountains
Set Sandstone 14x10x6, 9 in. deep,
marked 1 notch on E. & 2 on E.
edges with stone mound
along side for Cor. to Sec's.
16. 27. 34 & 35.

Land level and mountainous

364 A

366

Subs. Tp. 11 S., Rg. 9 E.

Soil 1st and 2nd rate

Undergrowth artemisia

Mountainous on 17.23' Chs. and

dense undergrowth on 62.73 Chs.

North Bet. Sec. 26 & 27

Var. 16° 21' E.

4.75' Steep ascent E.

40.00 Set sandstone 11x10x6, 7 in. deep,
marked 1/4 on N. face with
stone mound alongside for
1/4 Sec. Cor.

80.00 Set limestone 13x8x7, 8 in. deep
marked 2 notches on E. & E.
edges with stone mound
alongside for Cor. to Sec. 22. 23. 26 & 27

Land mostly steep
mountainous slopes

Soil 3rd rate

BOOK-A-186 367

Subs. Tp. 11 N. R. 9 E.

No Timber

Dense undergrowth and mountainous on 80 chs.

Note: The eastern and Southern parts of this Township consisting of high mountains not available for agricultural purposes. I discontinue lines here and omit the survey of those parts.

From the Cor. to Sec. 33+34 on the South Boundary of the Tp. recently set by me

I run

North bet. Sec. 33 & 34

Var. 16° 21' E.

364 A

364

368

Descr. Tp. 11 S., R. 9 E.

20.00	Road bears N.W. & S.E. in Gulch
	drains S.E. 30 ft. deep.
31.25	Road bears N.E. & S.W. Tops & Slope
35.00	" " E. & W.
40.00	Set Lime stone 18x16x6, 12 in.
	deep marked 1/4 on N. face
	with stone mound along side
	for 1/4 Sec. Cor.
80.00	Set Sandstone 24x14x7, 18 in. deep.
	marked 1 notch on S. and 3 on E.
	edges with stone mound along
	side for Cor. to Sec. 27.28.33 & 34.
	Land North half level Bench,
	Covered with dense undergrowth,
	S. half mountainous.
	Soil 2nd rate. No Timber
	Mountainous and dense
	undergrowth on 80 chs.

Town

6

7

18

19

30

31

BOOK-A-186

069

Subs. Tps. 11 & 12 S. R. 9 E.

Gulch		East on random line bet. Secs. 27 & 34. Var. 16° 21' E.
W. & E. slope	11.00	Set temp. 1/4 Sec. Cor.
	37.00	Descend.
2, 12 in.	63.10	Foot of slope
ee	80.40	Intersect N. & S. line 22 chs.
y side		S. of Cor. to Secs. 26. 27. 34 & 35,
		from which I run S. 89° 51' W.
18 in. diag.		on true line bet. Secs. 27 & 34
3 on E.	80.20	with same variation
		a Line Stone 10 x 10 x 2, 6 in.
nd along		Deep, marked 1/4 on N. face
33 & 34.		with Stone mound alongside for 1/4 Sec.
Bench,		Cor.
growth,	80.40	The Cor. to Secs. 27. 28. 33. & 34
		Land mostly level Bench
		Soil 1st rate
Timber		No Timber
		Dense artemisia undergrowth
chs.		on 80.40 chs.
		Nov. 3rd 1882

Subs. Tp. 11 S., Rg. 9 E.

North bet. Sec. 27 & 28
Dec. 16° 21' E.

30.00 Steep ascent

40.00 Set Sand Stone 11 x 7 x 7, 6 in. deep, 40.
marked 4 on W. face with
stone mound alongside for
1/4 sec. Cor.

80.00 Set Line stone 14 x 7 x 6, 9 in. 40.2
deep, marked 2 notches on S.
and 3 on E. edges with stone
mound alongside for Cor. to
Sec. 21, 22, 27 & 28

Land most by Mountainous 80.2
Soil 2nd rate
Timber a few Cedar & Pine
Mountainous & dense
undergrowth on 8 chs.

BOOK-A-186

37

Lubs. Tp. 11 N. R. 9 E.

East on sandrock line bet.
Sec. 22 & 27.
Var. 16° 21' E.

40.10 Set temp. 1/4 Sec. Cor.
80.25 Intersect N. & S. line 41 lks.
N. of Cor. to Sec. 22. 23. 26 & 27
from which Mound N. 89° 42' W.
on true line bet. Sec. 22 & 27
with Magnetic var.
40.12½ Set limestone 8x8x8, 5 in. deep
marked 1/4 on S. face with
stone mound alongside for
1/4 Sec. Cor.
80.25 Sec. Cor. to Sec. 21. 22. 27 & 28
Land high mountains
Soil 2nd rate
Timber pine Cedar & pine
Some underbrush & mountainous
on 80.25 chs.

372

Subs. Tp. 11 N., Rg. 9 E.

From the Cor. to Sec. 32 & 33
on the E. Boundary of the Tp.
Recently set by me Iron
North bet. Sec. 32 & 33.
Dec. 16 '21 E.

Ascend

10.00	Top of Bluff bears N. W. & S. E.	
40.00	Set Lime stone 18 x 14 x 6, 12 in. deep, marked 1/4 on W. face with stone mound along side for 1/4 Sec. Cor.	8.50
45.00	Broad hollow drains N. W.	14.50
48.00	Small hollow " " W.	18.00
59.00	Road bears N. W. & S. E.	22.00
70.00	Top of low hill	40.00
75.00	Descend from same.	
80.00	Set Lime stone 14 x 14 x 6, 9 in. deep, marked 1 notch on S. & 4 on E. edges with stone mound alongside for Cor. to Sec. 28. 29. 32. & 33.	51.50 80.00

BOOK-A-186

Subs. Tp. 11 N. Ro. 9 E.

Sand mostly high Bench
Soil 3rd rate
No Timber
Fence arlemisia underground
80 chs.

East on random line bet. Sec.
28. & 33
Jan. 16 '21 E.

8.50 Wash drains S.
14.50 " " "
18.00 " " "
22.00 Foot of hill
40.00 Set temp. 1/4 Sec. Cor. on top of
hill 100 ft. high, descend.
51.50 Enter rolling Bench
80.00 Intersect N. & S. line at Cor. to
Sec. 27. 28. 33. & 34 from which
Mum. Bears on true line bet. Sec.

364

36

374

Subs. Tp. 1 S. R. 9 E.

28+33 with ranch variation.

40.00 Set limestone 18X12X6, 12 in. deep, marked 1/4 on N. face with stone mound along side for 1/4 Sec. Cor.

80.00 The Cor. to Sec. 28. 29. 32+33.
Land level & hilly Bench
Soil 1st rate Spring water
Fence undergrowth on 80 chs.
Nov. 4th 1882

North bd. Sec. 28+29
Var. 16° 21' E.

40.00 Set sandstone 18X16X6, 12 in. deep, marked 1/4 on N. face with stone mound along side for 1/4 sec. Cor.

45.00 Steep descent

80.00 Set sandstone 14X7X5, 9 in. deep, marked 2 notches on S. & 4 on E. edges with stone mound

26
35
40
80
40
80

BOOK-A-186

375

Lake Tp. 11 N., Rg. 9 E.

along side for Cor. to Sec. 20.21.28+29
Sand Rock + mound Pioneers
Soil 1st + 3rd rate
No Timber
Dense undergrowth to 80 chs.

East on Land on Line bet. Sec.
21+28.
Var 16° 21' E.

26.00 Gulch 75 ft. deep drains S.
33.00 " 30 " " " S.W.
40.00 Set temp. 1/4 Sec. Cor.
80.20 Intersect N. + S. line at Cor. to
Sec. 21.22.27+28 from which
West on true line bet. Sec 21+28
with same variation
40.10 Set Limestone 10x10x7, bris. deep,
marked 1/4 m. N. face with stone
mound alongside for 1/4 Sec. Cor.
80.20 The Cor. to Sec. 20.21.28+29.

64A

364

Town

Subs. Tp. 1 S. R. 9 E.

Land high mountains
Soil 2d rate
Timber open pine
Mountainous & underbrush on
80 20 chs.

From the Cor. to Sec. 31 & 32 on
S. Boundary of Tp. 2 N. ascend & run
by mag. N. 1 hr. Sec. 31 & 32
Var. 16° 21' E.

40.00 Set Lime Stone 12x12x6, 8 in. deep,
marked 1/4 on W. face with stone
mound along side for 1/4 Sec. Cor.

46.00 Hollow 10 ft. deep, drains N. E.

62.00 Descend

70.50 Spring Branch 3 lks. wide 4 in.
deep runs N. E.

80.00 Set Lime Stone 30x16x6, 18 in. deep,
marked / notches on S. and 6 in

BOOK-A-186

Lubs. Sp. 11 T. 37 N. R. 9 E.

E. edges with stone mound
along side for Cor. to Sec. 29, 30, 31 & 32
Sand High Bench
Sid 2nd gate
No Timber
Dense undergrowth on 80 chs.

East on random line bet. Sec. 29 & 32
Var. 16° 21' E.

0.85'	Price River 60 lks. wide 2 ft. deep runs S. E.
1.75'	D & R. G. R. R. bears N. W. & S. E.
2.50	Telegraph line " " " "
	Ascend
5.00	Top of Bluff or River bank
	thence up Gulch
10.50	Leave Gulch heads N. E.
34.00	Gulch dries S. W.
40.00	Set temp. 1/4 Sec. Cor.

Subs. Tp. 11 S., Rg. 9 E.

378

43.00	Enter high Bench	
55.00	Hollow drains N.W.	
62.50	Road bears N.W. & S.E.	
80.00	Intersect N. & S. line at Cor. to Sec.	8.00
	28.29.32 & 33 from which	13.00
	Gum Wilson tree bears W. dist. 29 &	33.00
	32. with same va.	40.00
40.00	Set limestone 14x12x6, 9 in. deep,	55.00
	marked 1/4 on N. face with stone	78.00
	mound along side for 1/4 Sec. Cor.	
80.00	The Cor. to Sec. 29. 30. 31 & 32.	
	Land broken slopes and	
	high Bench	38.00
	Soil 2nd rate	
	No Timber	
	Dence runs E. & South on 80 chs.	78.00

BOOK-A-186

Subs. Tp. 1 N., R. 9 E.

West on said Base line bet. Sec. 30 & 31
Var. 16° 21' E.
Record

8.00	Top of Bluff bears N.W. & S.E.
8.00	Edge grassy hollow draining N.W.
33.00	Leave same.
40.00	Set temp. 1/4 Sec Cor.
33.00	Hollow draining N.E.
78.00	Intersect West Boundary of Tp. at Cor. to Sec. 30 & 31 Recently set by me from which Grun East on true line bet. Sec. 30 & 31 print Same variation
38.00	Set Limestone 18 X 16 X 6, 12 in. above, marked 1/4 on N. face with stone mound along side for 1/4 Sec. Cor.
78.00	The Cor. to Sec. 29, 30, 31 & 32. Land mostly high Bench Soil 2nd rate No Timber

Done at Nemaha under my hand on 78 chs.
Nov. 6th 1882

Subs. T. 9. N. R. 4 E.

	North bet. Sec. 29 & 30
	Var. 16° 21' E.
0.25'	Rock Knoll 60 lks. wide 2 ft.
	deep, runs S. E.
1.75'	D & K. G. K. R. bears N. W. & S. E.
2.50	Telegraph line " " "
	Recorded
12.50	Point of Bluff bears N. E & S. E.
27.50	White sand stone point bears
	N. E. & S. E. 125 ft. high.
36.50	Gulch drains S. W.
40.00	On top of Bluff bears E & W. set
	sand stone 14 x 14 x 2, 9 in. deep marked
	1/4 on W. face with stone mound
	along side for 1/4 Sec. Cor.
49.40	Road bears N. W. & S. E.
54.00	Enter Hollow bears E & S. W.
77.00	Leave same bears N. W. & S. E.
80.00	Set sand stone 24 x 14 x 3, 18 in. deep
	marked 2 notches on S. end

BOOK-A-186

381

Sub. Yp. T. 2 S., R. 9 E.

For Edges with stone mound
along side for Cor. to Sec. 19. 20. 29 & 30
Land mostly broken
Soil 2nd rate
No Timber
Dense chemisia undergrowth on 80 chs.

East on random line bet. Sec. 20 & 29
Var. 16° 21' E.
4.00 Gulch drains S.
40.00 Set temp. 1/4 Sec. Cor.
80.42 Intersect N. & S. line 34 chs. N. of Cor.
to Sec. 20. 21. 28 & 29. from which
Gum N. 89° 45' W. on true line
bet. Sec. 20 & 29, with same var.
40.21 Set Sandstone 11 x 9 x 9, 7 in. deep
marked 1/4 on N. face with
stone mound alongside for
1/4 Sec. Cor.

Mich. Tp. 11 N. Rg. 9 E.

80.42	The Cor. to Sec's. 19.20.29+30	
	Land high Mountainous Spec	33.00
	Soil 2nd rate	56.50
	Timber scattering scrub Cedar	61.50
	and Pine	70.50
	Mountainous and underg'rowth on	78.50
	80 43/100 chs.	
	West on sandom Line Sec. Cor's.	
	19+30 Var. 16° 21' E.	
5.00	Enter level land and Brush	38.50
10.00	Wash gulch 25 ft. deep, Swans S.	
15.00	Top of hill.	
16.00	Descend	
17.00	Enter Flat	78.50
26.08	Road bears N. W. + S. E.	
39.40	" " N. + S. in gulch	
	100 ft. deep drains S.	
40.00	Set temp. 1/4 Sec. Cor.	
40.15	Cayuse Creek 10 lks. wide, 6 in.	

BOOK-A-186

383

Subs. Tp. 11 S., R. 9 E.

Descends S. across.

33.00 Top of Slope.

36.50 Head of small Hollow drains S.

61.50 Road bears N. W. & S. E.

70.50 Descend

78.50 Intersect W. Boundary of Tp. 10 Rs.
N. of Cor. to Secs. 19 & 30 Recorded by me
from which I run
N. 89° 53' E. on true line bet.
Secs. 19 & 30 with same var.
38.50 Set Sandstone 30x24x18 in.
18 in. deep, marked 1/4 Sec. N.
face with Stone Mound
along side for 1/4 Sec. Cor.,
78.50 The Cor. to Secs. 19, 20, 29 & 30
Land broken Bench & flat
Soil 2nd rate
No Timber
Dense Artemisia Underwood on
78.50 chs.

883

the

20

2.

82

82

ary

aid

are

)

ah.

Subs. Tp. 11 S., R. 9 E.

North Bet. Sec. 19 & 20
Jan. 16 '21 E.

40.00 Set sandstone 14x6x6, 9 in. dep.
marked 1/4 on W. face with
stone mound alongside for
1/4 Sec. Cor. 20.25
23.25

52.00 Gulch drains S. W.

80.00 Set sandstone 12x10x5, 8 in. dep,
marked 3 notches on S. and 3 on 40.00
E edges with stone mound 62.00
alongside per Cor. to Sec. 17, 18, 19 & 20 79.00

Land mountainous
Soil 3rd rate
Tim'br scattering Pine 39.00
Mountainous and dense undergrowth
on 80 chs.

79.00

Note: On account of high mountains I
abandon the line East.

BOOK-A-186

385

Surv. Tp. 11 S., Rs. 9 E.

West on said Some line bet. Sec. 18 + 19

Var. 16° 2' E.

20.25 Road in cañon 250 ft. deep, bears N. + S.

25.25 Coyune Creek 10 lks. wide 4 in. deep runs S. accord.

40.00 Set temp. 1/4 Sec. Cor.

62.00 Gulch dries S.W.

79.00 Intersect W. Boundary of Tp. at Cor. to Sec. 18 + 19 recently set by me from which East on true line bet. Sec. 18 + 19. with same va.

39.00 Set Sandstone 10 x 10 x 7, 6 in. deep, marked 1/4 on N face with stone mound alongside for 1/4 Sec. Cor.

79.00 The cor. to Sec. 17. 18. 19 + 20

Land mountainous

Soil 3rd rate

Timber scattering Pine

Meandarions and dense
under growth on 79.00 chs.
Nov. 7th 1882

Note. On account of high mountains & slender
further survey in this township

Note. The applicant Arthur L. Ford
has his improvements in S.E. ¼ of
Sec. 30. and consist of a good and
substantial Log Cabin and other out-
houses. The cabin was occupied
at time of survey by another
family. Mr. Fords residing at
Fish Creek Station in the Pk adjoin-
ing on the West, which will also
be surveyed under same dispositi
made for this Township, as I find
that the desired lands lie in both.

BOOK-A-186

General Description

The surveyed portion of this Township embraces some good bottom land along Price River and adjacent Branches. The D & R.G.R.R. runs along Price River through Sec. 29. 30 and 32. There are two settlements in Sec. 30 and one in Sec. 34. The unsurveyed part falls in high unavailable Mountains.

A. D. Peirson
U. S. Dep. Surveyor

BOOK-A-186

388

U. S. SURVEYOR GENERAL'S OFFICE,

Salt Lake City, Utah, June 9th 1883

The foregoing field notes of the survey of the

portions Subdivisions w

Township No 11 S Range No 9 E

of the Salt Lake Meridian, Utah Territory,

Executed by C. D. Ferrow

Under his contract No 113

of the 9th day of October 1882

in the month of November 1882

having been critically examined, the necessary corrections and explanations made, the said field notes, and the surveys they describe are hereby approved.

Fred Salsbow

U. S. Surveyor General for Utah.

BOOK-A-186 389

REPORT: 1883.

Filed 188

Examined by John H. Caffey

Transcribed by E. Michaelis

Compared by Benj. R. Stevens & E. Michaelis

FIELD NOTES

OF THE SURVEY OF THE

fractional

Subdivisions

OF

Township No 12 South

Range No 6. East

OF THE

SALT LAKE MERIDIAN

IN

UTAH TERRITORY,

AS SURVEYED BY

A. D. Fenton

U. S. Deputy Surveyor,

Under his Contract No. 110

Dated August 29th 1882

Survey commenced November 17th 1882

Survey completed " 17th 1882

186-14

BOOK-A-186

Township 12 S. R. 6 East

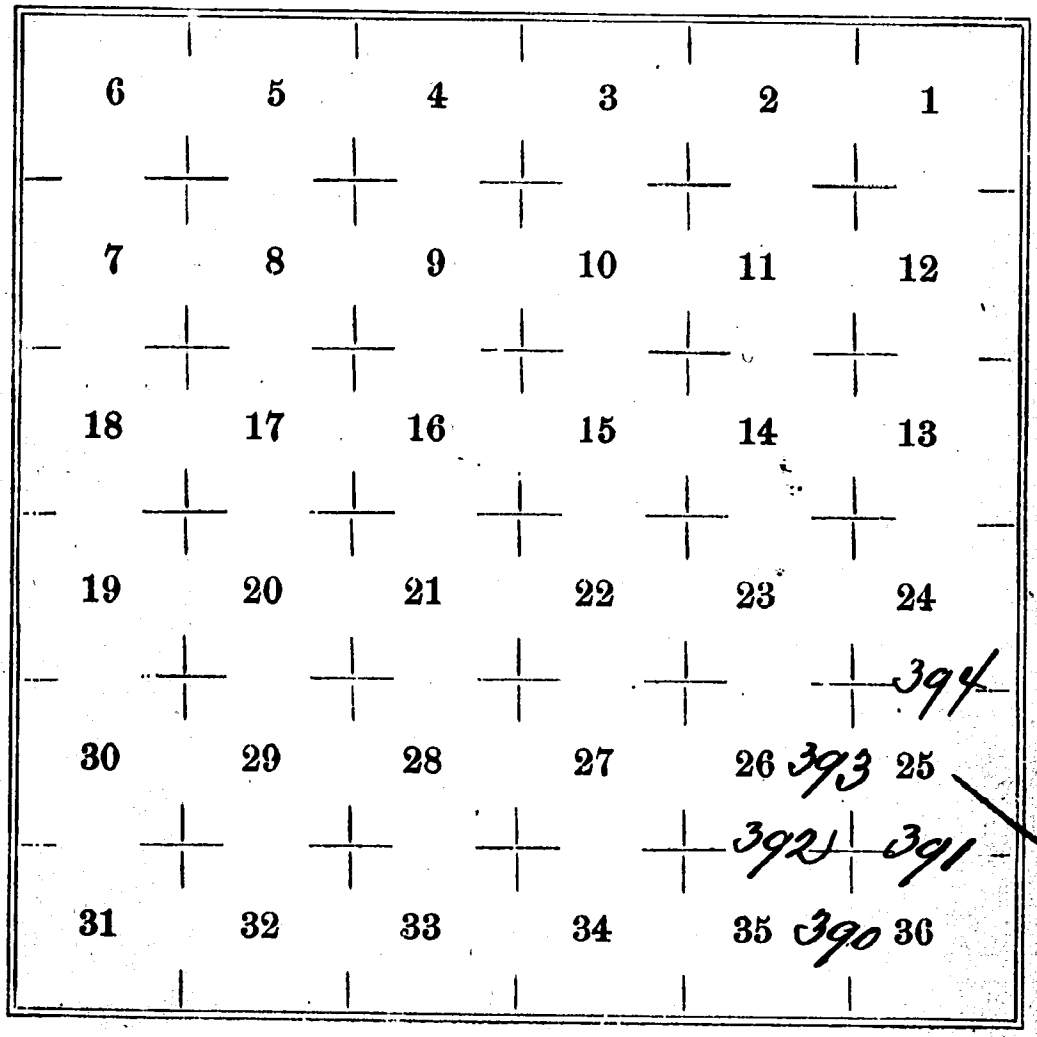

BOOK A-186 390

Field Notes T. 12 S., R. 6 E.

Survey commenced November 17th 1883
from the established Cor. to Sec.
35 & 36 on the S. Boundary of this
T. & run Easterly on said S. line
between Secs. 35 & 36
Var. 16° 25' E.

4.00 Set charred aspen post 3 x 3 in. 4 ft. long,
1.00 for 1/4 sec. cor. 2 ft. deep, marked 1/4 S. 35 W. Pace due
S. 4 links. Set 5 1/2 ft. dist.
stones & mound of earth 4 ft. base
2 ft. high around post. from which
Ju. Pine 4 in. dia. bears S. 40 W. 17 lks.
Pit. marked 1/4 S.B.T.
Quaking Aspen bears N. 62° E. dist. 20 lks. dec.
" " N. 63 30' E. 18 " "

47.20 Ran 20 chs. 50 lks. cross 6 in. deep
runs & in Woods canon
45.00 Road bears E & W. crossed
34.00 Ridge bears N. W. & S. E.
30.00 Set charred aspen post 4 x 4 in.

391

Surv. Tp. 12 S., Ra 6 E

4 M. Dug 2 ft. deep, marked pine
on S. & E. edges and 1.25 N. of 12 C.
on N. & S. 26 on N. W. 35 on E. M.
C. 36 on N. E. edges. Dug 4 pits 24x24x1
N. E, N. W, S. E, & S. W. of Cor. 3½ ft. dist.
and raised a mound of earth 4 ft.
face, and 2 ft. high around pits,
for Cor. to Sec. P. 25: 26 35 & 36.

Land high Mountains
Soil 2 cl. sate
Timber small quaking Aspen
Mountains on S. side.

Centre standard line bet. Sec. 2. 35 & 36.
Var. 16° 25' E.

24.50 Canine drains N.
40.00 Set temp. ¼ Sec. Cor.
80.18 Intersect E. boundary of Tp. at 8. C.
Sec. 25 & 26 being at Sandstone 70 x
x 7 ft. with stone mound

from which Sun
Set bears true line Bet. Sec. 25 & 36
with same variation
20 x 12 x 3, 15 in. deep,
marked 1/4 on N. face with stone
mound along side for 1/4 Sec. Cor.
The Cor. to Sec's. 25, 26, 35 & 36
Land Mountains
Soil 2nd rate
Timber small Mixed Aspen & Pine
Mountains in 80 acres.

Note. As the West Boundary of Sec. 35 will not
be surveyed on account of high
unavailable Mountains therefore
from The Cor. to Sec's. 25. 26. 35 & 36
Sun
West true line Bet. Sec's. 26 & 35.
Var. 16° 25' E.
Ridge bears N. W. & S. E.

393

Subs. Sp. 12 E. Sec. 6 E.

40.00 Set Sandstone 12x7x7, 8 in. deep mar[illegible]
4 on N. face with stone mound
alongside for 1/4 Sec. Cor.
Note: Abandon line West.
No Land Mountains
Soil 2nd Rate
No Timber
Mountains on W Chs.

North bet. Sec. 25 & 26
Var. 16° 25' E
Descend

40.00 Set Sandstone 17x10x19 in. deep,
marked 1/4 on N. face with stone
mound alongside for 1/4 Sec. Cor.
Note: Abandon line West
Land Rough Mountains
Soil 2nd Rate
No Timber
Mountains on 40 chs.

BOOK-A-186

394

Mps. Sp. Pr. C. Co. E.

Sp. Cor. to Sec. 23. 24. 25 & 26 not being established therefore from W. Cor. to Sec. 24 & 25 on the E. Boundary of the Sp. Grant Victor Mining Dist. Cor. Sec. 24 & 25 Var. 16° 25' E.

Set Sandstone 12 X 10 X 7, 8 in. deep, marked 1/4 on N. face with the mound alongside for 1/4 Sec. Cor.

Found Rocky Mountains Soil 2nd rate

Timber small Aspen saplings Mountainous on 40 Acs.

Nov. 17th 1882

Abandon further survey of this township.

395

General Description

The surveyed portion of the Sonoratiqui embraces some coal lands which can be subjected from Hondo canon. The unsurveyed portion are also coal lands but unavailable, being inaccessible.

A. D. Jenson
U. S. Dep. Sur.

396

BOOK-A-186

U. S. SURVEYOR GENERAL'S OFFICE,

Salt Lake City, Utah, June 9th 1883

The foregoing field notes of the survey of the fractional Subdivisions of Township No. 12 S. Range No. 6 East Executed by A. D. Perron No. 110 Under his contract of the 29th day of August 1882, in the month of November 1882, having been critically examined, the necessary corrections and explanations made, the said field notes, and the surveys they describe are hereby approved.

Jno Salmon

U. S. Surveyor General for Utah.

BOOK-A-186
R. 1883. — 397

Filed 187 .

Examined by John M. Campbell.
Transcribed Michaelis
Compared by Benj. Stevenson & Michaelis

FIELD NOTES

OF

THE SURVEY OF THE

fract. North & fract. pes. of East Bd.

of Township No. 13 S. , Range No. 6 E.

of the Salt Lake Meridian in Utah Territory.

BY

A. D. Pearson

U. S. DEPUTY SURVEYOR,

Under his Contract No. 110

dated August 29th 1882.

Survey commenced November 15th 1882.

Survey completed " " 1882.

186-15

BOOK-A-186

Township 13 S. R. 6 East

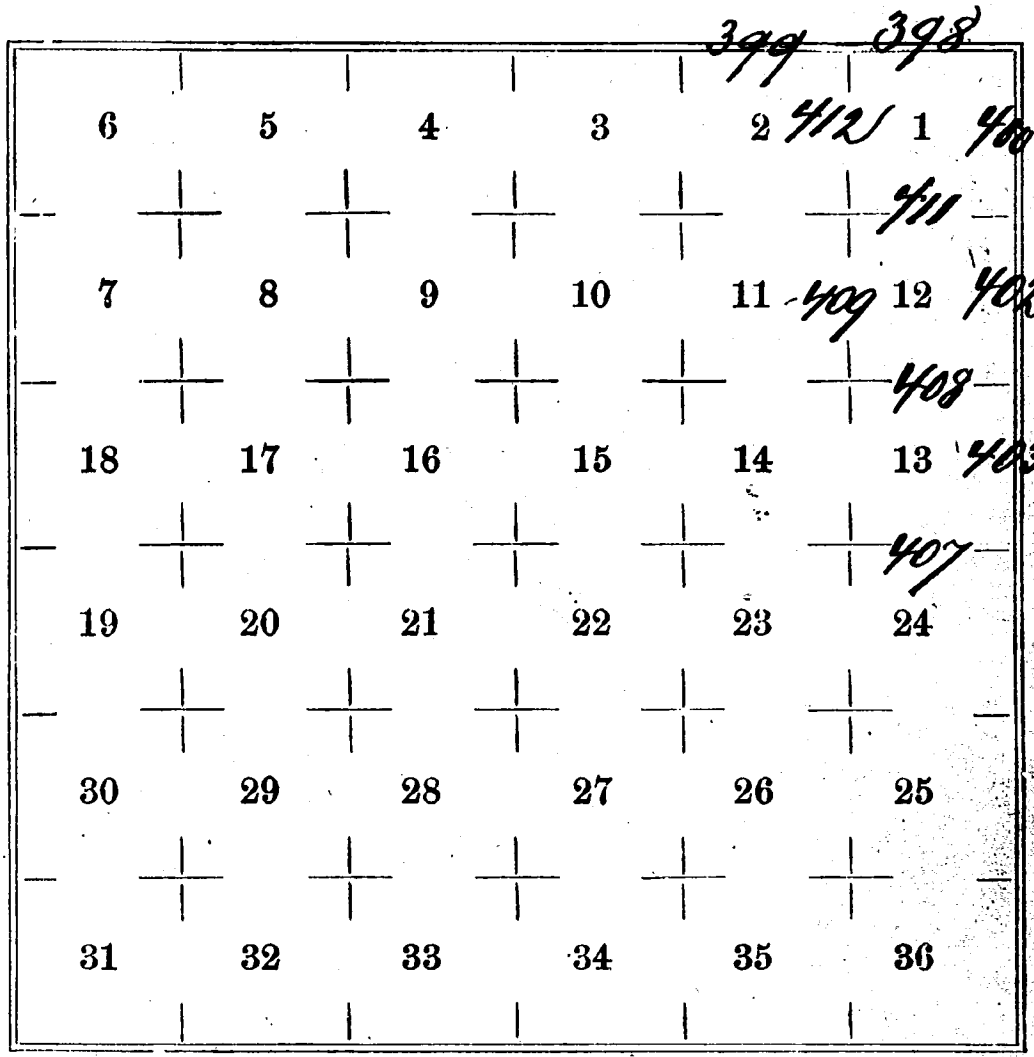

BOOK-A-186

398

S. Boundary Sta. 13 E., Ko. 6 E.

Survey Commenced Nov. 15th 1882.

I commence at the established Co.
Cor. Sec. 12 & 13 T. 1 S., Ko. 6 & 7 E. being a
Sandstone 30 X 15 X 7, with Stone
mound alongside from which Utah
Meridian Bears West Dist. Sec. 1 & 36
Var. 16° 25' E.

32.00 Ridge bears N. E. & S. W.
11.00 Set Sandstone 18 X 8 X 4, 12 in. deep
marked 1 on N. face with Stone
mound alongside for 1/4 Sec. Cor.
32.00 Same Ridge bears N. W. & S. E.
64.50 " " N. E. S. W.
81.00 Set Sandstone 18 X 10 X 4, 12 in. deep,
marked 1 notch on E. & 5 on W.
edges with Stone mound alongside
for Cor. to Sec. 1, 12, 35 & 36
Land high Mountainous
Soil 2nd rate
Timber scattering small Aspen
Mountains on E. Chs.

883

f the

ee
E.

882

882

isary

said

are

Utah.

399

N. Boundary Mk 13 S. Ko. 6 E

West on the line bet. sec. 2 + 35
Var. 16° 25' E.

9.00 Rocky ledge bears N. W. + S. 6° second.
10.00 of Sandstone 13x10x7, 8 in. deep,
marked 1/4 on N. face with two
crossed diagonals for 1/4 sec. cor. 29.10

Note: The land further West being
unsurveyed, I abandon the line. 31.75
32.2

Land high Mountains
Soil 2nd rate
Timber scattering on 1/3 part
Mountains on 40.00 chs.

33.00
40.00

56.00
66.00

79.00

Resurvey

BOOK-A-186. 405

Co. Boundary Tps. 13 S., Rs. 6 E.

From the Cor. to Tps. 12 & 13 S., Rs. 6 & 7 E. being a sandstone 30 x 15 x 7, with stone mound alongside

883

West South Bd. Sec. 1 & 6

Var. 16° 25' E.

2.00 Sugar City & Rexburg road bears E & N.

3.75 D. & R. G. R. Rs. (V. L. Branch) bears E & N.

32.25 Junction Willow creek, 15 lks. wide 10 in. deep, runs E. The town of New Dales is situated on both sides of this line in Junction Willow creek

882

882

sary

said

are

tah.

Set Sec. 1 Record.

33.00 Set one lue 20 in. dia.

40.00 The regular 1/4 Sec. Cor. being a sandstone 19 x 15 x 7, to which is added a stone mound.

56.50 Willow Branch E.

66.25 Spring Branch 20 lks. wide 6 in. deep runs E.

77.25 Spring Branch 2 lks. wide 4 in. deep runs E.

Resurvey

E Boundary T. 35 S., R. 6 E.

in Hollow

80.00 No trace of original Cor. set a
Sandstone 8x12x4, 12 in. alt.
marked 1 notch on N. + 5 lks E. Ridge
with stone mound along side for Cor.
to Sec. 1. 6. 7 + 12.

Land Mountainous
Soil 2nd rate
Timber some pine + Aspen mer. Brush
Mountainous one 80 Chs.

BOOK-A-186

Reserve 402

Co. Boundary Sp. T3 S., R6 E.

South bet. Secs. 7 & 12

Var. 16° 25' E.

28.50 High ridge bears E & W.

40.00 The original ¼ Sec. Cor. being a Sandstone 13x9x5, with X scribed on E. face, & a stone mound alongside

50.00 Spring Branch 10 lks. wide, 6 in. deep, bears E. in deep cañon

8.10 The original stone being broken off a sandstone 20x10x6, 13 in. deep, marked 2 notches on N. & 4 on S. edges with stone mound alongside for Cor. to Secs. 7, 12, 13 & 18

Land high Mountains

Soil & rock

Timber pine & cedar

Mountainous on S. & W.

Treasury

E. Boundary 1903 S. B. & M. 6 E.

South Bet. Secs. 13 & 18
Var. 16° 25' E.

4.00 Ridge trees N. E. & S. W.

22.75 Spring Branch 3 lks. wide 4 m.
Ridge runs N. E. to Creek.

38.00 Ridge bears E & W.

40.00 No trace of original Cor. Set
Sandstone 14×10×8 in. Pits
marked 14 on N. face with stone
mound along side for Sec. Cor.

57.00 Prairie drains S. W.

80.00 Ore original Cor. being Section
Post & Sandstone 20×16×8 in.
Pits marked 3 notches on N. & E.
edges with Stone mound along
side for Cor. to Secs. 13. 18. 19 & 24

Land high Mountains
Soil 2nd rate
Timber Pinon & Pine

BOOK-A-186

Meanderings on 8th Std.

This line was re-run to find
Stirling and connecting points
for the survey of the available
Pub lands in Tps. 13 S., Rs. 6 E.
Many of the Corners having been
destroyed along with the Timber
by fire.

November 15th 1882.

For General description see
Field notes of this Township.

S. D. Peron
U. S. Dep. Surveyor

BOOK-A-186

405

U. S. SURVEYOR GENERAL'S OFFICE,

Salt Lake City, Utah, June 9th 1883

The foregoing field notes of the survey of the

fract North and fract resurvey

of East boundary

Township No 13. S. Range No 6. East

of the Salt Lake Meridian, Utah Territory,

Executed by A. D. Perron

Under his contract No 110

of the 29th day of August 1882,

in the month of November 1882,

having been critically examined, the necessary

corrections and explanations made, the said

field notes, and the surveys they describe are

hereby approved.

Frd Salsbury

U. S. Surveyor General for Utah.

BOOK-A-186

R: 1883. 406

Filed 187 .

Examined by John H. Quigley

Transcribed Michaelis

Compared by E. Michaelis & Benj. K. Stevenson

FIELD NOTES

OF

THE SURVEY OF THE

Fractional

Subdivisions

of Township No. 13 S., Range No. 6 E.

of the Salt Lake Meridian in Utah Territory.

BY

A. D. Pierson

U. S. DEPUTY SURVEYOR,

Under his Contract No. 110

dated Aug 29 1882.

Survey commenced November 16th 1882.

Survey completed " 17th " 1882.

186-16

BOOK-A-186

407

Subs. Tp. 13 S. R. 6 E.

Commenced Nov. 16th 82

Note: The E. Boundary of this Township is
[illegible] established [illegible] only
a small part thereof being
available. Commence Survey

From the Cor. to Sec. 13 + 24 on
the E. Boundary of the Tp. I set a
sandstone 16x20x8 ins
firmly set with stone mound along
side

West on true line bet. Sec. 13 + 24
Var. 16° 33' E.
Gulch & Spurs &c.
16.00 Set Sandstone 12x8x7, 8 ins. deep
40.00 marked 1/4 on N face with stone
mound alongside for 1/4 Sec. Cor.
Note: Adjacent line here.
Land very Broken Mountainous
Soil 2nd rate
Timber Pine

883

the

co

2

82

821

ary

aid

are

)

ah.

Sec. 13 T. 7 S. R. 6 E.

Mountainous on 40 Chs.

From the Cor. to Sec. 12 & 13 on the E. boundary of the T. begin

From West on Sec line Var. 16° 33' E.

39.00 Prairie drains N. E.

40.00 Set Sandstone 18 x 14 x 5, 12 in. deep, marked 1/4 on N. face with stone mound along side for 1/4 Sec. Cor. from which Ln. deposit 18 in. dia. bears N. 45° W. 20 lks. dist. a Pine 10 " " " S. 25° W. 16 " " Both marked 1/4 S. 13. T.

64.75 Prairie drains N.

71.00 Ridge 1000 ft. high bears N. W. & South.

75.50 Steep descend.

80.00 Set Sandstone 16 x 10 x 5, 11 in. deep

5.50

10.00

BOOK-A-186

Sec. Tp. 13 S., Ro. 6 E.

marked 4 notches on E. and on E. edge
with stone mound alongside for Cor.
to Secs. 11. 12. 13 + 14. from which
an Aspen 12 in. dia. bears N. 10° W.
29 lks. dist. marked T. 13 S., R. 6 E.
S. 11 B. T.
an Aspen 6 in. dia. bears S. 45° E. 30 lks.
dist. marked T. 13 S. R. 6 E. S 13 B. T.
Sand Heavy Mountain
Soil 3rd rate
Dense burnt Pine Timber.
Mountainous on 80 chs.

North bet. Secs. 11 + 12.
Var. 16° 33' E.
Top of high peak on N. W. end of ridge
Descend
Set Sandstone 22 X 10 X 5, 15 in. deep
marked 1/4 on W. face with stone mound
alongside for 1/4 Sec. Cor. from which

83
the
82
82
ary
aid
are
ah.
5.50
10.00

Surv. No. 4590 Ks. 6 E.

An aspen 12 in. dia. bears N. 45° E. 17 lks. dist
A Fir 14 " " " N. 70° W. 8 " "
Both marked 14 S.P.S.
59.30 Eagle ridge bears N. W. & S. E. 31.
80.00 Set Sandstone 30 x 20 x 14, 20 in. above G.
marked 5 notches on Sandstone 80.
E. edges with stone mound alongside
for Cor. to Sec. 1. 2. 11 & 12.
And Eagle Mountains
Soil 2nd rate 40
Timber Aspen mostly burned
Heavy Refuse Underbrush
Mountainous 80 chs. 80.
November 16th 1882

BOOK-A-186

Sec. 5 T. 13 S. R. 6 E.

East on random line bet. Sec. 1 & 12
Var. 16° 33' E.
Deep prairie Trees N. E.
" " " N.
Set temp. 1/4 Sec. Cor.
Intersect E. Boundary of Sp. 21 Chs.
N. of Cor. to Sec. 1 & 12 from which
N. 89° 57' W. on true line bet.
Sec. 1 & 12. with rame va.
Set Sandstone 14 x 14 x 6, 9 in. deep
marked 1/4 on N face with stone
mound alongside for 1/4 Sec. Cor.
The Cor. to Sec. 1, 12, 11 & 12
Land high Mountains
Soil 2nd rate
Timber burned Aspen Pond Pine
Mountains on 80.60 chs.

Sec. Sp. 13 T. 2 N. R. 6 E.

North on random line bet. Sec 11 & 12
Var. 16° 33' E.

N. 75° E. 24.00 Eight inch ledge trees N. E. & S. W.
40.00 Set stone Sp. 1/4 Sec. Cor.
N. 85° E. 11.85 Winter quarters cañon Creek
10 lks. wide 6 in. deep runs E.
Record.
N. 45° E. 15.00 Aspen 18 in. dia.
N. 75° E. 15.50 Knoll trees E. & W.
N. 7° E. 17.00 Ledge trees N. W. & N. E.
N. 88° E. 88.00 Intersect N. boundary of Sp. at
Cor. to Sec. 11 & 12, Recently set by
me from which I run
North on true line bet. Sec. 11 & 12
with range variation.
W. 40.00 Set sandstone 18 X 18 X 10, 12 in. deep
marked 1/4 on N. face with stone
mound along side for 1/4 Sec. Cor.
Iron scribed
Bears
One Aspen 8 in. dia. bears S. 81° 30' E. 12 links dist.
One " " " " N. 78 W. 67 " "

BOOK-A-186

413

Sects. Tps. 13 S., Rs. 6 E.

Both marked 1/4 S. B. T.

The Cor. to Sec. 1. 2. 11. & 12.

Land high Mountains

Soil 2nd rate

Some Pine & Aspen

Mineral on 80 chs.

November 17th 1882

360

414

General Description

The surveyed portion of this Township consists of Coal land situated in the heart of the Gunnison Mountains, which has been made available by a completed Branch of the Denver & Rio Grande Rail Road. The unsurveyed parts lying West are not available on account of the coal seams dipping West and are therefore have no natural advantage. A small town of about 50 houses called Anthracite is situated in Sec 1.

A. D. Leeson

U. S. Dep. Surveyor.

361

359

BOOK-A-186

4/5

U. S. SURVEYOR GENERAL'S OFFICE,

Salt Lake City, Utah, June 9th 1883

The foregoing field notes of the survey of the

Fractional Subdivisions

of

Township No 13 S. Range No 6 E.

of the Salt Lake Meridian, Utah Territory,

Executed by A. D. Perron

Under his contract No 110

of the 29th day of August 1882,

in the month of November 1882,

having been critically examined, the necessary corrections and explanations made, the said field notes, and the surveys they describe are hereby approved.

Fred Saldeen

U. S. Surveyor General for Utah.

BOOK-A-186
R: 1883

Filed 187 .

Examined by John H. Caine Jr.
Transcribed by Michaelis
Compared by E. Michaelis & H. K. Stevenson

FIELD NOTES

OF

THE RESURVEY OF THE

fractional East & South boundaries

of Township No. 14 S. , Range No. 9 E.

of the Salt Lake Meridian in Utah Territory.

BY

A. D. Person

U. S. DEPUTY SURVEYOR,

Under his Contract No. 113

dated October 9th 1882.

Survey commenced Nov. 18th 1882.

Survey completed " 20th 1882

186-17

BOOK-A-186

Township 14 S. R. 9 East

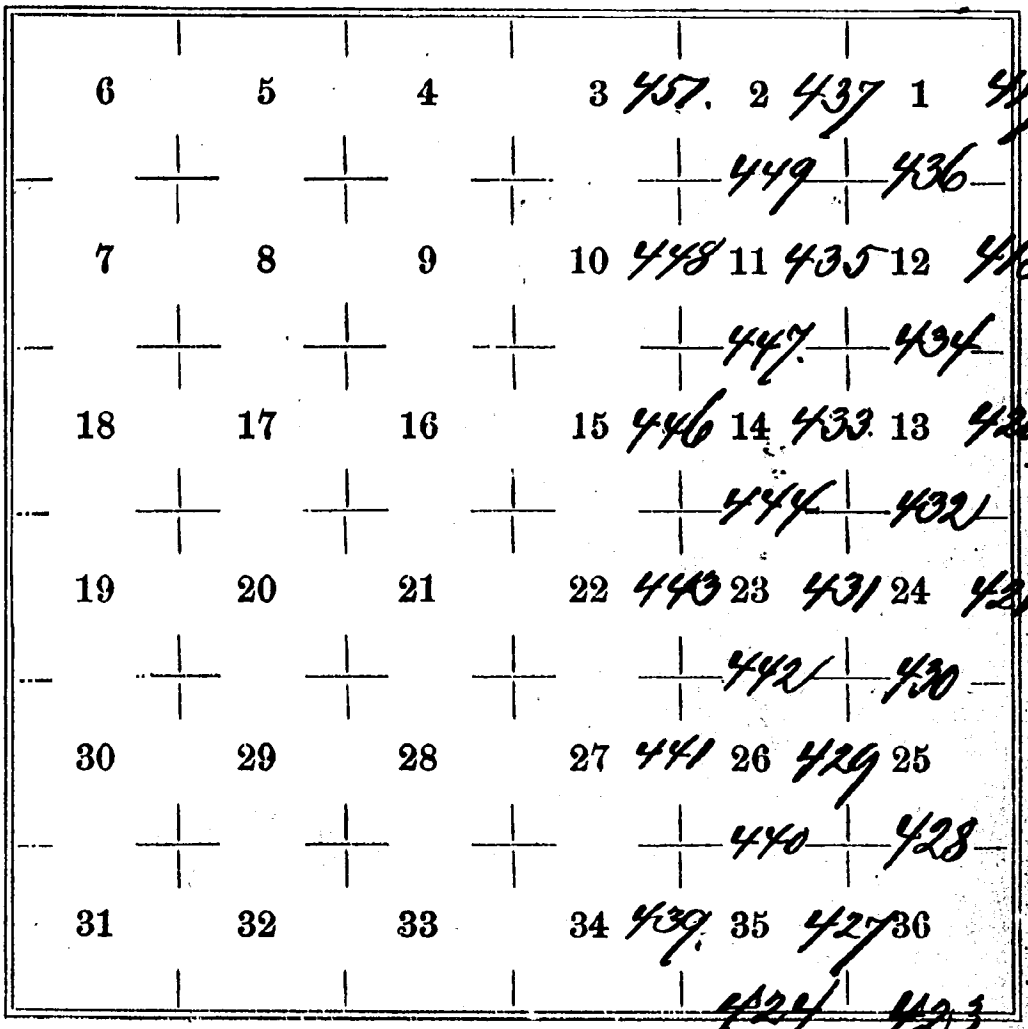

BOOK-A-186

Resurvey 1897

East Boundary Twp. 14 S., Rs. 9 E.

	Survey commenced Nov. 18th, 1882	883
	on Line at the Cor. to Secs. 31 & 6	
	T. 14, Rs 9 & 10 E, between which	f the
✓	I set a Sandstone 24 x 7 x 6	
	feet buried set, with stone mound,	es
	from which I run	2.
	South bet. Secs. 1 & 6	
	Var. 16° 20' E.	
40.00	At post of high Bench Bluff, I find	
	the old 1/4 Sec. Cor. thence over	82
	which I set a Sandstone	82
✓	30 x 15 x 7 ins, with stone mound	ary
	along side.	aid
46.70	New Wagon road bears N. W. & S. E.,	are
47.50	Telegraph Line " N. W. & S. E.,	
48.25	D & Rio G. R. R. " " "	)
49.00	Bank of Bench " " "	ah.
	15 ft. high. Into Slough.	
53.20	Leave slough, on to Bench	
60.40	Ditch bears E.	

Resurvey

East Boundary T. 8 S. R. 6 E.

64.80	Enter cultivated land Grass E & W.
74.25	Old Creek bed Grass N. E.
	Leave cultivated Ranch.
80.00	Original Cor. Stone Buried in sand
	Beta cobble Stone 18 X 10 X 6, marked
	pitch on N. & S. on S. edge with stone
	mound alongside for Cor. to Sec. 16, 7 & 12.
	Road Gothen high Bench
	Mixed land Bottoms
	Soil 3rd & 4th rate
	Timber Cedar & Pine on W. part.
	Meandered Mississippi Channel Hodgson Bar 64.50 ch
	Nov. 18th 1882
	South bet. Sec. 7 & 12
	Var. 16° 20' E.
72.50	White River 80 lks. wide 2 ft.
	deep Mud E. E. enter dense
	Underbrush.
33.00	Ascend.
33.90	S. E. point of ridge.

BOOK-A-186

East Boundary T. 14 S., R. 9 E.

36.25 Gulch drains S. E.

40.00 The original 1/4 Sec. Cor. being a Sandstone 15 X 7 X 6, with stone mound alongside.

42.00 Ridge runs E. & W.

49.00 Gulch drains N. E.

53.00 Ridge runs N. W. & S. E.

66.00 Enter flat and dense grease wood & underbrush

75.85 Road runs N. W. & S. E.

80.00 Set the original classified cottonwood post which I found some distance off in its true place, no mound and pits. Cor. to Sec. 7, 12, 13 & 18

Land level & mountainous

Soil 3rd & 4th rate

No timber

Mountainous and dense

Underbrush on 80 chs.

Resurvey 1920

East Line, July 30. 14 ch. 20 l. S.

South Qr. Sec. 13 & 18.

Var. 16° 20' E.

6.00	Cross Ridge. 8 lks. wide 1 ft. deep runs N. & E.
14.00	Branch of same 5 lks. wide 2 ft. deep runs S. E.
19.50	Road bears N. W. & S. E.
20.00	Ascend.
24.00	Ridge 15 ft. high bears S. & W.
37.00	Edge Wet.
44.00	To Trace of original Cor. set Sandstone 12x8x6, 8 in. deep, marked Cor. on W. face. with stone mound alongside for 4 Sec. Cor.
50.00	Ditch drains S. E.
73.78	" " N. E.
80.00	The original Cor. having been trampled out by cattle & not finding the original mound ordered set post in the Ditch. Pre-set

20.00

74.00

80.00

BOOK-A-186

Resurvey

East Boundary 4 S. 14 E. 6 E.

Set and reset pits and mound.
for Cor. to Sec. 13, 18, 19 & 24.
Land mostly level
Soil 1st rate
Mountainous and Undulating south to 80 chs.

South Et. Sec. 19 & 24
Var. 16° 25' E.
The original Cor. in place.
Within 40 ft. deep drains S. E.
The original Cor. partially destroyed
which I re-set removing pits
& mound for Cor. to Sec. 19 & 24.
25 & 30.
Land rolling & broken hills
& 1st & 3rd rate
No timber
Mountainous and Undulating with
an 80 chs.?

Note: I discontinue resurveying having retraced the balance of the East Boundary of this Township and found the corners all intact.

BOOK A-186

Utah

South Boundary Tp 14 S. R 9 E.

From the cor to Tps 14 & 15 S. R 9 & 10 E.
being a Charred Cottonwood post with
mound and pits & rem
West on true line Let. Rec. p. 436
Var. 16° 20' E.

5.50 Wash drains S. E.

14.50 " " "

40.00 No trace of original Cor. Let Sandstone
16 x 9 x 6, 10 in. deep mar. Qual 1/4 on N. face
with stone mound for 1/4 Sec. Cor.

80.00 The original Cor. Mound was which
I erect. being a Sandstone 18 x 10 x 7,
12 in. deep marked Notch on E & W Sides
Wedges & Raised a stone mound
alongside for Cor. to Sec. 12. 35 & 36
Found Broken
Soil 3rd rate
No Timber
Undergrowth on S & E.

Recovery

4-24

North Boundary Tp. 4 S. Ra. 9 E.

West on this line Sec. Cors. 2 & 35

Var. 16° 20' E.

28.37 Ascend broken Hills

40.00 The original ¼ Sec. Cor. on plain Deing a Sandstone 20 x 10 x 3 with stone Mound

42.00 Gulch drains N. E.

70.00 Foot of Sandstone Bluff 200 ft. high.

80.00 Original Cor. not found. Set Sandstone 18 x 10 x 5, 12 in. deep, marked 2 notches on E. and 4 on W. edges with stone mound alongside for Cor. to Secs. 2. 3. 34 & 35.

Land mostly mountainous

Soil 2nd rate

No Timber

Mountainous & Underbrush on 80 chs.

Nov. 20th 1882

Note: For General Description see subdivisions of this Township.

A. D. Fesson

U. S. Dep. Sur.

BOOK-A-186.

425

U. S. SURVEYOR GENERAL'S OFFICE,

Salt Lake City, Utah, June 9th *1883*

The foregoing field notes of the survey of the

fractional
East & South boundaries

Township No 14 S. *Range No* 9. E.

of the Salt Lake Meridian, Utah Territory,

Executed by W. D. Ferron

Under his *contract No* 113.

of the 9. *day of* October *1882*

in the month of November *1882*,

having been critically examined, the necessary corrections and explanations made, the said field notes, and the surveys they describe are hereby approved.

Fred Salomon

U. S. Surveyor General for Utah.

BOOK-A-186
R: 1883 426 A

Filed 187 .

Examined by
Transcribed
Compared by

FIELD NOTES

OF

THE SURVEY OF THE

fractional subdivisions

of Township No. 14 S. , Range No. 9 E.

of the Salt Lake Meridian in Utah Territory.

BY

U. S. DEPUTY SURVEYOR,

Under his Contract No. 113

dated Oct 9 1882

Survey commenced Nov. 21 1882

Survey completed " 24 1882

186-18

Subs Sp. 14 S., Rg 2 E.

Survey Commenced Nov 21/82
From the cor to Sec 1 35 & 36.
on the S. Bound. of the Sp.
recently set by me I run
North but Sec 35 & 36.
Va 16 20 16.

28.50 Mark 6 ft dup drains S.E.
36.00 " " " "
38.00 " " " "
40.00 Set Sand Stone 16×10×5 11 in
dup, marked 1/4 on W. Face with
Iron mound for 1/4 Sec cor.
43.50 Creek
47.50 Ridge 100 ft high bears Sly W.
61.50 Mark 20 ft dup drains N.E.
65.75 " " " " N.E.
70.00 Set Sand Stone 20×20×18, 15
in dup, marked 1 Notch on E.
& E. edges with Iron mound
for Cor to Sec 25, 26, 35 & 36

Sub. Sp. 428, K. 9 E.

Found broken,
Laid 3rd Date
No Finches.
Mudguards on Doors.

Carlton Sand Lime Brick Co.
Rec? 25 Mch 36,
Via 16 & 20 C.

27.00	Work done	N.E.	
44.00	"	"	S.E.
26.50	Same "	"	S.E.
28.50	" "	"	N.E.
40.00	Ret Temp. 1/4 Recess.		
95.50	Head of Sulch drains	N.	
63.50	Same	"	S.E.
80.80	Interest & Brand. 28 Ch. S. of Ind. being a Strand Stone 12x9x6. Wood Ind. Carts Rec? 25.3.36. From Brand 1.89.04 N. Carlton Sand Lime Brick Co. Rec? 25.3.36.		

BOOK-A-186

Auto. Sp. 14 T. 4 E. 9 E.

40, 40 Set Standard 14×4×7, 9in dub
marked 1/4 cor. Sec with stone
mound 2in 1/4 bearing.

80, 80 The cor. Sec. 25, 26, 35 & 36.
Land very broken
Soil 3rd rate.
Underbrush on 80.8 chs.

North bd. Sec. 25 & 26.
Va 16° 20' E.

5,00 Enter rolling flat.
14.50 Creek bears N.E.
20,50 " " E.
21,50 " " N.E.
25,00 " " N.
27,00 " " E.
33,00 " " "
36,50 " " "
38,25 " " "

480

Subs. Tp 14 S., Ra. 9 E.

40.00 Set stake 18×6×5, 12 in deep marked 1/4 on E. from which bears mound for 1/4 sec. cor.

42.00 Wash drains S.

43.00 " " S. E.

80.00 Set Sandstone 14×10×8, 9 in deep, marked 2 Notches on E. and on E. edge with stone mound for cor to Sec 23. 24 25, and 26.

Land N 1/2 level, S. 1/2 broken,

Soil 1st rate,

No timber

Undergrowth on 80 chs,

East on random line 2nd Sec 1/4

Va 160 20 6.

40.00 Set stump. 1/4 sec cor.

53.00 Small wash drains N.E.

BOOK-A-186

Subs. Tp. 14 S. Ro. 9 E.

80.75 Intersect E. Bound. of T.
60 lks S. of cor. to Secs 24 & 25
being a post Pittsfield. from which
S. 89° 34' W. on true line bet Secs
24 and 25.

40.37 Set porphyry 20 x 20 x 12, 15 in
dug, marked 1/4 Cor N Boone
with iron mound pit 1/4 Cor.

80.75 Thy cor to Secs 23. 24. 25 & 26.
found level,
Pit 12 inch,
Ash 7 inches
Meridional 80.75 chs.

North bet Secs 23 & 24
0 x 16 20 L.

40.00 Set Lime stone 14 x 8 x 6, 9 in dug
Marked 1/4 S. Boone with
Iron mound pit 1/4 Cor

54.25 Small Wash drains E.

4324

Subs. Sec. 14 T. 2 R. 9 E.

80.00 Pat. Sandstone, 4x12x8, 9in. thick
with 3 notches on S. & on E.
edges with stone mound. For
Corb Dec.s 13. 14. 23 & 24.
Land, level,
Soil sandy,
No timber
Unimproved. 80 chs.

Contiguous lines but Dec.s
13 & 24
Cor 160 20 L.

40.00 Pat. stone S. & see cor.
75.50 Wash drains N.E.
80.30 Intersect E. boundary of Sec.
~~Recorded Utility~~ 30 lks. S. of cor
Dec.s 13 & 24 recently set by me
from which Spruce D. 8 0 x 4 9 in.
on line but Dec.s 13 & 24,
40.00
53.00 40.15 Pat. Sandstone 12x10x5, 9in.

BOOK-A-186

Subs. Tp. 14 S., R. 9 E.

Dud, marked 1/4 on N face,
mound for 1/4 sec. cor.
8030 The cor. to secs 13, 14, 23 & 24
Land level, rolling
Soil Adobe
Timber
Hudspeth on 80 chs.
Nov 24th 1882
Meander line Dec. 13 & 14
Dec 16 & 20 '82
450 Wash drains N.E.
2300 foot of Bluff.
2850 Top of "
40,00 Pit Quadrilateral 10 × 8 × 8, 6 in dub,
marked 1/4 on W. face with stone
mound for 1/4 sec cor.
57.00 Descend from Bluff,
56.00 Foot of do. Eg N.
62,48 Jordan Creek 40 links wide runs E.
62.50 Branch of same 8 " " " "
67.00 Jordan Creek 10 " " " "

Subs. Tp. 134 S., Ro. 9 E

68.35 branch of Sams Creek
Sams E.

80.00 Pt Pine Hond. 18×12×3, 12 in
dup, marked 2 notches on S.
and on E. edge with blow
mound Parcorts dec. 11, 12,
13 & 14,
Land level & brush
Dril 1 strike
Timber Cedar, Cedar
Some Mudgmrds on 80 chs,

Cotton woodon bois bed.
Dec. 12 & 13.
On 160 acres

6.50 Sams Creek (applicants for survey) bears S. 30° E.
29.61 " " " S. 30° 02' W.
40.00 Pt Temp. 1/4 Sec cor.
80.00 Intersect. C. bound. of Pt at
Corto Dec. 12 & 13. Quarter Rich

BOOK-A-186

Lots 7 & 14, Blk. 9 E.

Boston runs thru lot Sec. 12 & 13.

40,00 Set stone 18×12×3, 12in deep, marked from N. Jan, with stone mound for 1/4 Sec cor.

80,00 Thy corts Sec. 11, 12, 13 & 14,

Sand Sand;

Oil 1 strata;

No Timber

Some high sandy mesa 80 chs.

Sec. lot Sec. 11 and 12

Dec 16 2016.

23,00 Low sandy mesa & flat, around

40,00 In bottom drains SE. Set stone 10×10×10, 6in deep marked from N. Jan with stone mound for 1/4 sec cor.

40,00 Set of Bluff enter Scatt. Cedar.

80,00 Set Sandstone 9×8×7, 6in deep marked S. Jackson S. and 1 on E. edges with stone mound

Sects. Tp. 14 R. 9 E

For contr. Sec. 1, 2, 11, 12.

Land mostly high table mountain

Soil Sandstone

Timber Dark. Cedar

Mountainous on 57 chs.

Hilly ground 23 "

Easton Random Line Ret.

Sec. 1, 12.

Var 16° 20' E.

35,00 Ascend from Bluff.

40,00 Pit dump. 1/4 Sec cor.

46,00 Head gulch 50 ft deep drains S.E.

49,25 Ridge bears N.E. 150 ft high.

57,00 Enter flat. Base Mountains

59,50 River bank 30 ft high

Rice R. 120 lks wide 18 in deep

Runs S.E.

68,60 Rice R. 50 lks wide 18 in deep runs N. 52 E.

76,50 " " 80 " " " " " " S.E. 62

BOOK-A-186

Subs. Sp. 14 S. R. 9 E.

437

So. 80 Intersect E. Bound. of Sec. at Cor
to Sec. 1 & 12, recently set by me
from which Corn
Victor pine bears Sec. 1 & 12
40.40 Set Sandstone 22 x 20 x 5, 16 in
deep, marked 1/4 on N. Pan, with
Mound, for 1/4 Sec Cor.
So. 80 Run Cor to Sec 1. 2. 11 & 12,
Find mostly Mountains;
Soil Sandstone;
Timber Scatt Cedar.
Mountainous 57. chs.

North on random line
Set Sec. Cor 2.
Va 16° 20' E.
40.00 Descend from Bluff.
Set Temp. 1/4 Sec Cor.
52.00 Bottom of deep Canon heads N.
62.00 Top of Bluff on N. side of Canon

Nos. 59 to 96.

No. 68 Enlargement of Bonnet of Pt. which is a sandstone 16×19×5 feet thick mound of Cort Rec. 1&2, from which Sutton two lines bet. Rec. 1 & 2.

No. 68 Rec Quantum 11×10×7, 6 inch, marker 1/4 on N. face with stone mound for 1/4 cor.

No. 68 The corts Rec 1, 2, 11 & 12, Land level & broken data Mountain;

Soil Sandstone;

Timber, Pratt. cedar.

Measurements on No. 68 ch.

Nov. 22nd 1882

6,
29.
No.
No.

BOOK-A-186

Sec. 2, Tp. 14 S., Ra. 9 E.

On S. Bound. of Sec.
From the Cor. to Secs. 34 & 35
Bearing Set by ens & mon
North but, Secs. 34 & 35
On 16.30 ch.

40.00 Set limestone 16×8×6, 11 in
Dug, marked 1/4 on E. face
with stone mound 1/4 Secor.
45.50 Ravine 75 ft deep drains N.E.
58.25 " " " " " E.
80.00 Set sandstone 24×18×10, in
18 in dug, marked one Notch on
S. & 2 on E. edges, with stone mound
for Cors Secs. 26. 27. 34 & 35.
Land, Rolling Mountains,
Soil Stony.
Cor Timber
Undergrowth on Secs.

Lake Tp. 14 S., Rge 9 E.

Cast on random line
last sec. 26 & 35
Calc 20 ch.

15.50 Low ridge bears N.W. & S.E.
28.50 Leave hill, bear do.
40,00 Set stump. 1/4 sec. cor.
67.00 Brick drain N.E.
76.00 Enter rolling hills
80.10 Intersect N.D. line at cor
to sec. 25, 26, 35 & 36 from which
Meridian line bears sec. 26 & 35
40.05 Set sand stone 14 x 12 x 6,
Pits dug, marked 1/4 sec.
Face with Azimuth for 1/4 sec. cor.
80.10 Ills corts sec. 26, 27, 34 & 35
Land level & broken hill,
Soil 1st & 2d rate,
Timber
Mountains on 32.60 chs.
Judgment = 47.50 "

BOOK-A-186

Subs. Tp. 14 S., Ra. 2 E.

Northast Sec. 26 & 27.
Jan 16. 20. 68.

10,00 Leave Hills
11.75 Track drains ch. E.
13.00 " " C.
40.00 Set Lime stone 20×10×3, 15 in
dirt, mark ✓ from W. Jaworski
Stone mound ✓ bearing
65.00 at foot of high Bluff Set a
lime stone 20×10×8, 15 in dirt, marked
2 Notches on S & E. edges with Stone
Mound S. W. C. for witness Cor to
Sec 22, 23, 26 & 27. Thence S
offset E. 12 chs & N. 15 chs to
a point W. 1.75 chs to a point
10.25 chs E. of
80.00 Set lime stone 14×12×6, 9 in dirt
marked 2 Notches on S. & E. edges
& W.C. with Stone mound for
witness Cor to Sec. 22, 23, 26 & 27.

442

Subs. Tp. 14 S., No. 16 E.

Sandy marshy broken flat
Coal & rate.
Timber
Undergrowth on 80 chs.

Easting random line bet.
Secs. 23 & 26.
Va 160 20' E.

10.25 Victors Cor.,
40.00 Set temp. 1/4 Sec. Cor.
80.40 Intersect N.B. line 2 chs S.
of Cor to Secs. 23. 24. 25 & 26.
from which
S. 89° 30' W. on this line bet
Secs. 23 and 26.
40.20 Set Quad stone 22 x 8 x 3. 15 in.
Dep. marked 1/4 on N face
with stone mound for 1/4 Sec
Corner

BOOK-A-186

Subs. Tp. 14 S., Rs. 9 E.

$0.40 Sh. cor. to Sec. 22. 23. 26 & 27.
Land, mostly broken and
rolling, Soil 3d rate,
N. Timber
Undergrowth m 80. rod chs.

North bet Sec. 22 & 23
Var 16° 20' E,
Offset E. 12 chs, then N. 35 chs;
then W. 12 " ; " N. 300 " to
40.00 On place, Marked stationary
Limestone 5 x 4 x 3½ ft. above ground,
Mon W. face with Stone mound
for 1/4 Sec Cor. Thence:—
S. 5.00 chs. East 28.00
N. 45.00 " W. 28.00 to
8.00 On place Set limestone
22 x 12 x 3. 15 in dark,
mark 3 Notches on S 20.

444

Subs. Tp. 14 S. R. 9 E.

Ledges, with stone mound for cor to Sec. 14, 15, 22 & 23. 72.50 80.35

Sand mountains

Oil Grade

No Timber

Mountainous on Rocks.

40.17½

Easting and Northing Lines Sec. 14 and 23. 80.35

Ca 16 2016.

0.50	Track Marin N.E.
5.00	Foot of Low Hill
9.00	Top of same
12.00	Foot of same
15.00	Track Marin N.E.
25.75	" " N.
33.50	Ends level land and brush
40.00	Set Stone ¼ Sec. cor.
57.00	E. Foot of Low Hill

BOOK-A-186

Sec. 35 T. 14 S., R. 9 E.

74.30 Mark drain N. E.
80.35 Intermit. R. line to Elk R.
Cor. Sec. 13. 14. 23. & 24.
From which Elm
S. 89° 43' W. on sec. line
bet. Sec. 14 and 23.
10.17½ Set Sand Stone 16×12×7, 9
in deep, marked 14 on N. face
with Stone mound for Witness,
80.35 Ore Cor. Sec. 14. 15. 22 & 23.
Land mostly level and heavily
Soil, 1st rate;
Timber
Undergrowth
Surveyed 46.85 chs.
Nov 23rd 1882.

4.36.

Auto. Sp. 14 S. 15 E.

North sub Sec. 14 & 15

Page no. 1.

7.50 Washdrains S.

20.00 Foot of Bluff

25.00 Ore stock slope of same Ref Sand

Stone 14×6+6. 9 in dark marker

4 W.C. with stone mound

for Witness 1/4 Sec. cor.

Stone Offset E. 15 chs. N. 38 chs

W. 15 chs. S

63.00 Adit in plan at foot of Bluff

67.00 Boulder. volts. oxide, 6 in dark

mins. E.

71.00 Band of same 8 ft wide, 1 mins E.

80.00 Ref sand Stone 18×6×4, 9 in dark

marker 4 blazes on E & W

edges with stone mound for

Cor Sec. 10. 11. 14 & 15

Last broken, Sold 5 adits

Workings Underground on Rock

BOOK-A-186

Subs. Pp. 14 E, Ko. 9 E.

Carton Middle Line Dist Dec. 11 & 14

Va 16° 26' E.

33.50 Wash drains S.E.

40.00 Det. Temp. & Bee cor.

80.20 Intermediate high line cor Dec. 11, 12, 13 & 14 from which Line West on a true line Dist Dec. 11 and 14,

40.10 Set a sand stone 16 x 16 x 5 11 in. deep, marked X on N. face, with stone mound 40 1/2 Lks. cor.

80.20 Pk Corte Dec. 10, 11, 14 & 15 Land level; Soil Mixture, Rye under growth and undergrowth on 80.20 Chs.

Sec. 1, Tp. 14 S., R. 9 E.

Mount Diablo Meridian.

10.00 Foot of Bluff 200 ft. high bears S. W.

19.70 Pt. of Dome onto Cedar.

34.00 Cedar.

40.00 Set Sand Stone 16×10×4, 11 in. deep, marked "Mon. W. 40 with Stone mound for pt. Cedar.

56.00 Cedar.

80.00 Set Stone 16×12×6, 11 in. deep, marked 3 notches on E. and W. edges, with Stone mound, for Cor. Secs. 1, 2, 11 & 12.

Land high Table Mountain

Coal Vein,

Timber Scrub Cedar

Mountainous 70 chs.

BOOK-A-186

#49

Subs. Tp. 14 S., Rs. 9 E.

Meas. on random line
Just. Dec. 2 and 11
Var 16° 20' E.

9.50 Top of Bluff 150 ft high descend
11.50 Bottom of dark Gulch drains
North. aband
14.00 Top of Bluff.
26.23 " " " descend.
28.50 Gulch 125 ft dark drains N.
aband
30.90 Top of Bluff.
34.50 Top of Bluff. (Note: This 1/4 sec cor
limit falling in inaccessible brush & clear
a trench 1/4 sec cor @ 34.50 chs)
Thence offset E. 10 chs. S. 11 chs.
W. 10 chs. to
45.50 On line in place, Temp Brass
50.60 Intersect N & S line 43 chs W.
of cor to Secs 1. 2. 11 & 12
from which

Subs. Tp. 14 S., Rg. 9 E.

N. 89° 42' W. on true line
Set Sec. 25 11.

40.30 Sall. in brush not set, at a
point 5.80 chs W. of true cor. from
Set a Sandstone 18×18×4, 12 in
deep, marked 1/4 on N. face, W.C.
with stone mound for Witness
to Sec. cor.

40.60 Pk. on rock Sec. 2. 25. 10 S 11
Sand Hills Mountains
Soil Sandstone
Timber Scatt. cedar.
Mountains run on 60 Chs

BOO

BOOK-A-186

Subs. Tp. 14 S., R. 9 E.

North on random line
bet Secs 2 and 3.
Va 16.20 ch.

4.95 Top of Bluff.
20.00 Bottom of hollow drains E.
200 feet deep, as near
35.00 Top of Bluff,
40.00 Set temp. 1/4 Sec cor.
Ab. 7 E Intersect N. Bound. of T.
at corner Secs 2 & 3. being a
Sand Stone 10 x 10 x 9, 6 in above,
marked according to instructions
with stone Mound. from
which Quartzite
South on true line bet
Secs. 2 and 3.
40.74 Set Quartzite 11 x 8 x 7,
6 in deep, marked 1/4 on N.
face with stone mound
for 1/4 Corner.

452

Subs. Tp. 14 S. R. 9 E.

So. 74 The corner of 2, 3, 10 & 11
Land & Tobb Mountain
Coal Landing,
Timber Cedar
& Mountainous on So. 74
Surv. in 1882

Note: I abandon further survey
of this Township. —

BOOK-A-186

General Description

The principal part of this Township embraces some good bottoms which can be irrigated from Rice River and Gordon Creek. The arable soil is mostly first rate and covered with the various kinds of vegetation which prove very dense growth. The unirrigated lands fall in high mineralized Table Mountains,

There is a settlement in Sec. 13, consisting of a house and a good ditch from the land to the farming lands around the house.

A. Pierson U.S. Dep. Sur.

BOOK-A-186 454

454

U. S. SURVEYOR GENERAL'S OFFICE,

Salt Lake City, Utah, June 9th *1883*

The foregoing field notes of the survey of the

Fractional Subdivisions

Township No 14 S. *Range No* 9 W.

of the Salt Lake Meridian, Utah Territory,

Executed by Augustus D. Perron

Under his *contract No* 113

of the 9th *day of* October *1882,*

in the month of November *1882,*

having been critically examined, the necessary corrections and explanations made, the said field notes, and the surveys they describe are hereby approved.

Fred Salsbury

U. S. Surveyor General for Utah.