Township



BOOK-A-202

1

REPORT: 1885

Filed 188

Examined by John H. Campbell

Transcribed by Henry R. McAtkinson

Compared by Atkinson & Michaelis

FIELD NOTES

OF THE SURVEY OF THE

Fract. N. & E. boundaries

OF

Township No 1 North

Range No 1 East

OF THE

SALT LAKE MERIDIAN

IN

UTAH TERRITORY,

AS SURVEYED BY

Edward W. Kocher

U. S. Deputy Surveyor,

Under his Contract No. 122

Dated December 4th 1885

Survey commenced June 16th 1884

Survey completed June 16th 1884

NAMES AND DUTIES OF ASSISTANTS:

Compassman.

Chainman.

Chainman.

Chainman.

Chainman.

Axeman.

Axeman.

Flagman.

BOOK

12.

We. L

do solemnly
fully execute
we will leve
even ground
sticking or
report the tru
the true len
measuring,
and in accor
in the survey
East bo
sides
of the Salt La
tory of Utah.

Subscribed an
day of Ju

[2. PRELIMINARY OATHS OF CHAINMEN.]

We, L. Kolb

and Richd Evans

do solemnly swear that we will well and faithfully execute the duties of chain carriers; that we will level the chain upon even and uneven ground and plumb the tally pins, either by sticking or dropping the same; that we will report the true distance to all notable objects, and the true length of all lines that we assist in measuring, to the best of our skill and ability, and in accordance with instructions given us, in the survey of the fractional North and East boundaries and subdivisions Tp 1 N, R 1 E.

of the Salt Lake base and meridian in the Territory of Utah.

L. Kolb, Chainman.

Rich. Evans, Chainman.

, Chainman.

, Chainman.

Subscribed and sworn to before me this 16th day of June 1884

Edward W. Koeber
U.S. Dep. Surveyor

Blank

Page

BOOK-A-202

[3 - PRELIMINARY OATH OF AXEMEN.]

We, J Jenkins

and L Schmidt

do solemnly swear that we will well and truly perform the duties of axemen, in the establishment of corners, and other duties, according to instructions given us, and to the best of our skill and ability, in the survey of fractional North and East Boundaries and Subdivisions T 1 S R 1 E

of the Salt Lake base and meridian in the Territory of Utah.

J. Jenkins, Axeman.

L. Schmidt, Axeman.

Subscribed and sworn to before me this 16th day of June 1884

Edward W Koeber

US Dep Surveyor

Blank

Page

East boundary Tp. 1 N. R. 1 E.

Survey commenced: June 16. 84.
From the cor. to Tp. 1 N. R. 1 & 2 E.
on Salt Lake Base line being a
lime stone 18 × 12 × 8. 12. the ground
& properly marked with stone
mound alongside

North betw. secs. 31 & 36
Var. 16° 30' E.

20.00 Ridge bears N. W.
40.00 Set sandstone 13 × 8 × 7 in 8 in the
ground for 1/4 sec. cor. marked 1/4
on W face and raised a stone mound
alongside.
48.00 Gulch drains S. E.
70.00 Ridge bears N. E. & S. W.
80.00 Set sandstone 12 × 8 × 6 in 8 in the ground
for cor. to secs. 25. 30. 31 & 36. marked
with 1 notch on Sand 5 on Nedges &
raised a stone mound alongside.
Land. Mountainous
Soil 2nd rate
No timber
High Mountains on 80 chs.

East boundary

Vote. 1/4 sec. cor. bet secs. 25 & 30 having been previously established I run

North on random line
bet secs. 25 & 30
Var 16° 30' E

40.00 Can not find old cor. set temp 1/4 sec
43.00 No trace of witness mound of stone
80.20 The cor. to secs. 19. 24. 25. 30.
I adjust my drain accordingly and run South on true recurvy line betw secs. 25 & 30
Var. 16° 30' E.

13.00 Enter canyon Red butte creek 10 lks wide 4 in deep runs S. W.
14.25 Fence & road bears N. W. & N. E.
15.60 Ascend
21.00 Gulch drains N. W.
22.00 Ridge bears S. E.
25.00 Gulch drains N. W.
41.00 Set sandstone 18 x 10 x 10 - 12 in the ground for 1/4 sec. cor marked 1/4 on W face and raised a stone mound alongside on ridge bears N. W.
53.00 Gulch drains N. W.

Tp. 1 N. R. 1 E.

80.00 The cor. to secs. 25. 30. 31 & 36
Land. High Mount.
Soil 2nd rate.
No timber
High Mountains on 80 chs.

From the cor. to secs. 13. 18. 19 & 24.
being a sandstone 4×10×6 in. firmly set
in the ground properly marked
with stone mound alongside I
run North on resurvey line
betw. 13 & 18.
Var 16° 30' E.

Ascend
40.00 No trace of old corner, Set limestone
17×10×9 in. 9 in. the ground for 1/4 sec cor
marked 1/4 on W face and raised a
stone mound alongside.
61.00 Ridge bears NE & S.W.
80.00 Set limestone 15×10×10 in. 10 in. the ground
for cor. to secs. 7. 12. 13 & 18 marked
with 2 notches on N & S. edges
and raised a stone mound alongside.
Land High Mountains.

Eastboundary Tp 1 N. R 1

Soil 2nd rate

No timber.

High Mountains on 80 chs.

Note. On account of unavailable ground I abandon survey here.

N. R. 1 Northboundary Tp. 1 N R 1 E.

From the cor. to secs. 5.6. 31 & 32 on N. boundary of tp. which is a sandstone 16×12×8 in firmly set in the ground & properly marked S rem

East on resurvey true line betw. secs. 5 & 32.

Var 16° 30' E.

3.00 Gulch drains N. W.

17.50 Road bears N. W & S. E.

39.50 " " N. E. & S. W

40.00 Old cor. thrown over which I reset being a sandstone 13×12×4 in 8 in the ground for 1/4 sec. cor. marked 1/4 on N face and raised a stone mound alongside.

45.00 Near ascend

65.00 Ridge bears N E & S.

80.00 Set sand stone 12×9×8 in 7 in the ground for cor. to secs. 4.5. 32 & 33 marked with 4 notches on E and 2 on Wedges and raised a stone mound alongside.

Land High Mount.

Soil 2nd rate

No timber.

High Mountains on 80 chs.

North boundary

East on true line
betw. sect. 4 & 33
Var 16° 30' E

21.00 Gulch drains N. W.
40.00 Set sandstone 10×10×7 - 7 - the
ground for 1/4 sec. cor. marked 1/4 on
N face and raised a stone mound
alongside.
45.00 Gulch drains N.
68.00 " " N. W.
80.00 Set sandstone 14×7×4 - 9 - the
ground for cor to secs 3 4. 33 & 34
marked with 3 notches on E &
W edges and raised a stone
mound alongside.
Land High Mount.
Soil 2nd rate.
No timber.
High Mountains on 80 ch

Note. On account of inaccessible
crags, I abandon line here.

June 16th 1884

BOOK-A-202

N. R. 1 E.

For general description
See subdivisions of this township

Edward W. Koeber
U. S. Dep. Surv.

Blank

Page

BOOK A-202

U. S. SURVEYOR GENERAL'S OFFICE,

Salt Lake City, Utah. July 26 1884

The foregoing field notes of the survey of the

frac. N. & E. boundaries

Township No. 1 N. *Range No.* 1 E.

Executed by Edward W. Koeberl

Under his *contract* no. 22 *of the* 4th

day of December 1883, *in the month of*

June 1884, *having been critically examined, the necessary corrections and explanations made, the said field notes, and the surveys they describe are hereby approved.*

Fred Salomon

U. S. Surveyor General for Utah.

Blank

Page

BOOK-A-202

17

REPORT: 1885

Filed 188

Examined by John H. Camp

Transcribed by E. Michaelis

Compared by Atkinson & Michaelis

FIELD NOTES

OF THE SURVEY OF THE

Fract. Subdivisions

OF

Township No 1 N.

Range No 1 E.

OF THE

SALT LAKE MERIDIAN

IN

UTAH TERRITORY,

AS SURVEYED BY

Edward W. Koeber

U. S. Deputy Surveyor,

Under his Contract No. 122

Dated December 4 1883

Survey commenced June 17th 1884

Survey completed June 25th 1884

BOOK-A-202

Township 1 N R. 1 E.

		11		12							
6	63.	5	51	4	39	3		2		1	
		62		49							
7	61	8	48	9	38	10		11		12	
60		59		47		37		30		28.	
18	58	17	46	16	36	15	29.	14	27.	13	9
57		56		45		35		26.			
19	55	20	44.	21	34	22	25.	23		24	
		54		43		32		24			
30	53	29	42	28	32	27	23	26		25	8
		52		41 84		31		21		20	
31		32	40 83	33 88 89 85		34		35	19	36	7

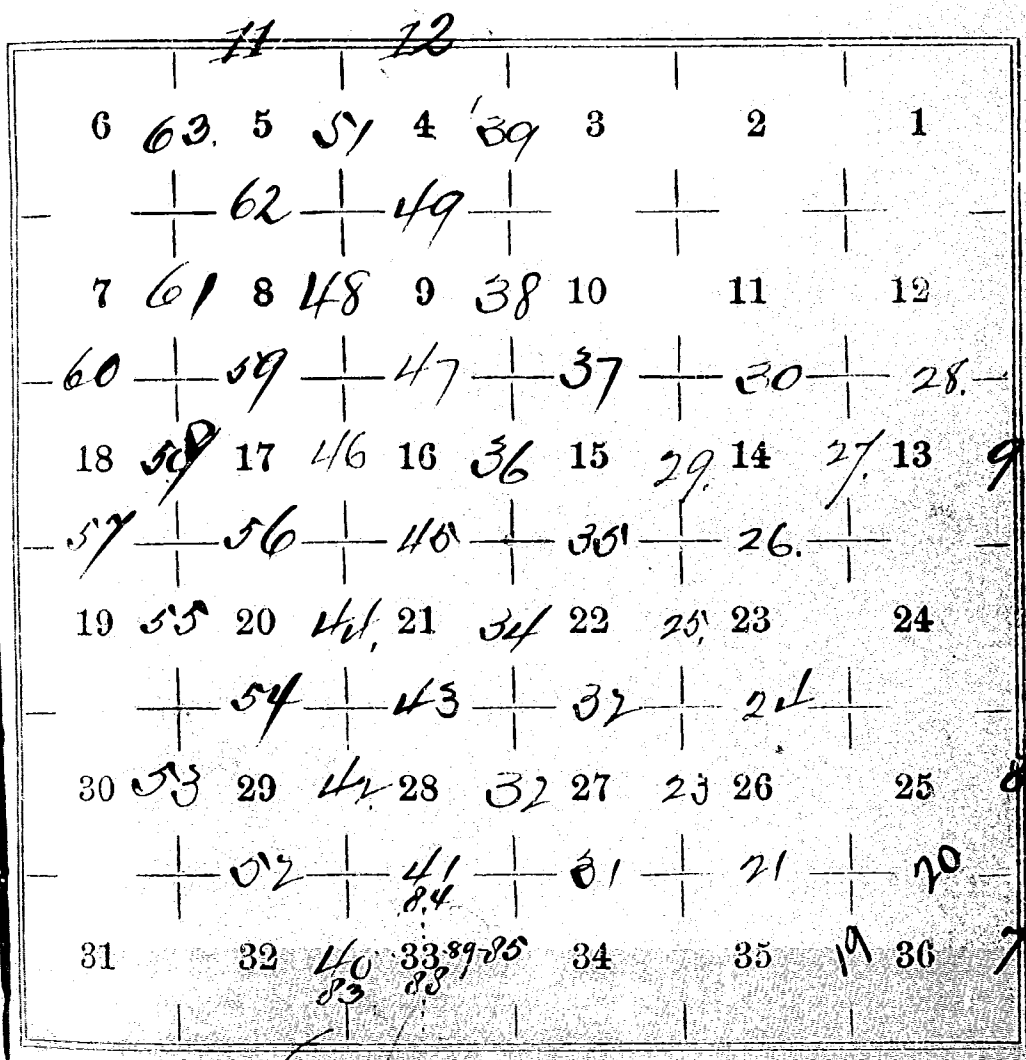

Poppies Reservoir

Subdivision Tp. 1 N. R. 1 E

Survey commenced: June 17 87
From the cor to secs 35 & 36 on
Salt Lake Base line of Tp.
which is a limestone 18×12×8 ins.
firmly set & properly marked
with stone mound alongside Thence
North on random line
betw. Secs. 35 & 36
Var. 16° 30' E.

40.00 No trace of old cor. set temp. 1/4 sec. cor.
40.18 22 lks E. of the cor. to secs. 25, 26, 35 &
36 being a sandstone 14×8×6 ins firmly
set in the ground & properly marked
with stone mound alongside.
I adjust my instrument & chain
accordingly and run
North on true resurvey line
betw. secs. 35 & 36
Var 16° 30' E.

1.50 Ascend
7.50 Ledge bears N W.
8.00 Gulch drain "
10.00 Set limestone 16×10×10 ins in the
ground for 1/4 sec. cor. marked 1/4 on W face &
raised stone mound alongside.

Subdivision

End of resurvey
52.00 Ridge bears N E & S W.
57.00 Gulch drains S W.
65.00 Ridge bears N E & S W.
80.00 The cor. to secs. 35 & 36.
Land Mountainous
Soil 2nd rate.
No timber
High Mountains on 80 ch

East on random line
betw secs. 25 & 36
Var 16° 30' E.

40.00 No trace of old cor. Set temp 1/4 sec cor
80.28 Intersect E. boundary of tp. at
cor. to secs. 25 & 36 set by me, from
which I run
West on true line
betw secs. 25 & 36
with same var.
18.00 Ridge bears N & S.
29.00 Gulch drains N.
40.14 Set sandstone 12×9×7 ft. the ground
for 1/4 sec. cor. marked 1/4 on W face
raised a stone mound alongside.

BOOK-A-202

Tp. 1 N. R 1 E.

53.50 Gulch drains N.
75.00 Road in canyon bears N W & S E.
80.28 The cor. to secs. 25. 26. 35 & 36.
Land High Mount.
Soil Erate.
No timber
High Mountains on 80.28 dm.

From the cor. to secs. 25. 26. 35 & 36
previously identified by me Trun
West on random line
betw secs. 26 & 35
Var. 16° 30' E.

40.20 Old cor. thrown over which I reset
for temp 1/4 sec. cor.
80.40 Intersected N & S line at cor to
secs. 26. 27. 34 & 35 which is a sandst.
25×6×4 firmly set in ground, properly
marked with stone mound along side.
from which Trun
East on true line
betw. secs. 26 & 35
Var 16° 30' E.

[illegible].00 Spoint of ridge.

Subdivisions

40.20 Reset old cor. being a sand stone 20×19×8 in 15 in the ground for 1/4 sec cor. marked 1/4 on N face and raised a stone mound along resurvey commences.

42.00 Gulch drains S.E.

45.00 Ridge bears N & S.

51.00 Find cor. to ten acres lot thrown on which I reset being a sand stone 14×11×9 in 9 in in the ground marked with X and raised a stone mound alongside.

50.30 Gulch drains S.W.

53.00 " " S.

57.00 " " S.

60.30 Find old cor. to ten acres thrown on which I reset being a sand st. 30×6 in 20 in in the ground marked X and raised a stone mound alongside

70.50 Enter canyon

72.00 Red Butte Cr. 15 lks wide 5 in deep runs

76.50 Ascend

79.75 Enter canyon

80.40 The cor. to Sec 25. 26. 35 & 36

Land. High Mountains

Tp. 1 N. R 1 E.

Soil 2nd rate.
No Timber
High Mountains on 80.40 chs.

North betw. secs. 26 & 27
Var 16° 30' E.

31.00 Gulch drains S. W.
40.00 Set a sandstone 10×8×7½ 7 in
the ground for 1/4 sec. cor. marked
1/4 on W face and raised a stone
mound alongside.
57.00 Ridge bears N E & S. W.
50.00 Set a sandstone 12×9×9 in
7 in the ground for cor. to secs. 22 23 —
26 & 27 marked with 2 notches on
S and E edges and raised a stone
mound alongside.
Land High Mountains
Soil 2nd rate
No timber
High Mountains on 86 chs.

Subdivision

East on random line
betw. 23 & 26
Var 16° 30' E.

40.00 No trace of old cor. set temp 1/4 sec
80.60 Intersect N & S. line 35 lks S of
cor. to secs. 23. 24. 25 & 26 from which
I run
S 89° 45' W on true resurvey line
betw secs. 23 & 26
with same var.
2.00 Road bears NE & SW.
2.30 Spring br. 5 lks. wide 3 in deep in cong
runs S. W. ascend
27.00 Ridge bears N & S.
40.30 Set line st. 15 x 8 x 6 in 10 in the gro
for 1/4 sec. cor. marked 1/4 on N. face
and raised a stone mound along
End of resurvey.
46.00 Ridge bears NE & SW.
80.60 The cor. to secs. 22. 23. 26 & 27.
Land High Mts
Soil 2nd rate
No timber
High Mountains on 80.
June 17. 84

BOOK-A-202

T. 15 S. R. 1 E.

North betw secs. 22 & 23.
Var 16° 30' E.

0.75. Dry Creek 5 lks. wide 2 in deep runs S.W.
12.00 Prospect Shaft 10 lks W.
38.00 Black ridge 2500 ft high bears NE & SW trail.
40.00 Set a lime stone 19 x 10 x 10 : 14 in in the ground for 1/4 sec cor. marked 1/4 on W face and raised a stone mound alongside.
55.00 Ravine drains N.W.
80.00 Set quartzite 20 x 10 x 7 : 15 in the ground for cor to secs. 14. 15. 22 & 23. marked with 3 notches on back on edges and raised a stone mound alongside.
Land. High Mountains
Soil 2nd rate.
No timber.
High Mountains on 40 chs.

Subdivisions Tp.

East on random line
betw. secs. 14 & 23
Var 16° 30' E.

40.00 Set temp 1/4 sec. cor.
80.40 Intersect N & line 11 lks S of
cor to secs. 13. 14. 23 & 24 from which I
run S. 89° 55' W on true line
betw secs. 14 & 23
with same var.
22.00 Ridge bears N E & S W.
30.00 Gulch drains S. W.
40.20 Set quartzite 12 × 10 × 6 in 8 ft the ground
for 1/4 sec. cor. marked 1/4 on W face
and raised a stone mound alongside
47.00 Trail on top of black Mountain
bears N 1/2 & S. W.
80.40 The cor to secs. 14. 15. 22 & 23
Land High Mountains
Soil Brate
No timber
High Mountains on 80.40 ch

BOOK-A-202

1 N. R. 1 E.

North betw. secs. 13 & 14
Var 16° 30' E.

From the cor. to secs. 13. 14. 23. & 24 Trans

7.50 Ridge Spur bears N W & S E.
24.00 Ridge bears N E & S W.
37.00 Black Mountain bears N E & S W.
40.00 Set limestone 12×10×10. 8. the ground for 1/4 sec. cor. marked 1/4 on W face and raised a stone mound alongside.
50.00 Set sandstone 15×10×7. 9. the ground for Cor. to secs. 11. 12. 13 & 14 marked with 4 notches on S. and 1 on E edges and raised a stone mound alongside.
Land High Mountains
Soil Fruits
Timber scatt. Pines
High Mountains on Wall.

Subdivision

East on rand on line
betw secs. 12 & 13.
Var. 16°30' E.

40.00 Set temp 1/4 sec cor
80.75 Intersect E. boundary 39 lks S of
cor to secs. 12 & 13 recently set by me
from which S run
S. 89° 43' W on true line
betw secs. 12 & 13
with same var.
22.50 Gulch drains N.E.
40.38 On High ridge set limestone
20×10×10. 15/24: the ground for 1/4 sec
cor. marked 1/4 on N face and
raised a stone mound slough
80.75 The cor. to secs. 13. 14. 23 & 24
Land High Mountains
Soil 3 rate
No timber
High Mountains on 80.75

June 18 84.

BOOK-A

Cp. 1

37.50 Cany
37.98 City C
38.10 Roa
40.00 Set
grou
on W
slough
64.00 Gulch
80.00 Set
grou
15 & 1
Sam
a st
Land
Soi
Tr

BOOK-A-202

Tp. 1 N. R. V E.

North betw secs. 14 & 15
Var. 16° 30' E.

37.50 Canyon drains S.W.
37.98 City Creek 9: deep. 20 lks wide runs S.W.
38.10 Road bears N.E. & S.W. ascend
40.00 Set limestone 9×9×9: 6: the ground for 1/4 sec. cor. marked 1/4 on W face and raised a stone mound alongside.
64.00 Gulch drain S.E. heads N.
80.00 Set limestone 12×12×8: 8: the ground for cor to secs. 10. 11. 15. & 14. marked with 4 notches on Sand 2 on Edges and raised a stone mound alongside.
Land: High Mountains
Soil 3 rate.
Timber scell pines
High Mountains on 80 chs.

Subdivisions

East on random line
betw. secs. 11 & 14
Var 16° 30' E.

40.00 Set temp 1/4 sec. cor.
80.90 Intersect N & S line 25 lks S of
cor to secs. 10.12.13 & 14. from which
S run
S. 89° 49' W on true line
betw secs. 11 & 14
with same var.
11.50 City Creek in canyon 9 deep 14 lks wide
run S.W. Road bears N & S.W.
40.45 Set quartzite 14×9×6 in the
ground for 1/4 sec cor. marked
1/4 on W face and raised a stone mound
alongside.
60.00 Ridge bears N & S.
80.90 In gulch ~~the~~ cor. to secs. 10.11.14 & 15
Land. High Mountain
Soil Grate.
No timber
High Mountains on 80.

BOOK-A-202

Tp. 1 N R 1 E.

West on true resurvey line
betw secs. 27 & 34
Var 16° 30' E.

0.10 Spring br. 5 lks wide 4 in deep runs N.
20.00 Ravine drains S.E.
30.00 Ridge bears N & S.
40.00 No trace of old cor. set sandstone 24 × 8 × 4 in × 8 in the ground for 1/4 sec. cor. marked 1/4 on N face and raised a stone mound alongside
68.00 Spring br. in ravine 5 lks wide 4 in deep runs S.
71.00 Ridge bears N & S.
74.75 Spring br. in ravine 5 lks wide runs S.
80.00 Find old cor. laying down, being a sandstone 24 × 8 × 3, which I reset 18 in deep in the ground for cor. to secs. 27. 28. 33 & 34 marked with 3 notches on E and 1 on S edges and raised a stone mound alongside.
Land. High Mount.
Soil 3 rate
No timber
High Mountains on 80 chs.

BOOK-A

Subdivisions

North betw. secs. 27 & 28
Var 16° 30' E.

8.00 Gulch drains S. E.
40.00 Set sandstone 20×10×4, 15 in the ground for 1/4 sec cor. marked 1/4 on W face and raised a stone mound alongside.
58.00 Gulch drains S. E.
80.00 Set sandstone 14×10×8 in the ground for cor. to secs. 21. 22. 27 & 28 marked with 3 notches on E and 2 on Sedges and raised a stone mound alongside.
Land High Mountainous
Soil 2nd rate
No timber.
High Mountains on 80

East on random line
betw secs. 22 & 27
Var 16° 30' E.

40.00 Set temp 1/4 sec cor.
80.20 Intersect N & S line 21 lks of cor. to secs. 22. 23. 26 & 27 from which Trum S. 89° 57' W on true

Tp.

1.80 Dry
10.00 Spring
29.25 Dry
30.00 Corner
S. W.
38.50 Dry
flum
40.10 Set
grou
W fac
alon
40.30 flum
48.50 Ra
65.00
80.20 The
Land
Soil
Not

BOOK-A-202

Tp. 1 N. R 1 E.

betw secs. 22 & 27
with same var.

1.80 Dry Cr. 5 lks. 2 in deep in canyon runs S.W.
10.00 Spring br. " " 3 " " " " "
29.25 Dry Cr. " " 3 " " " " N.W.
30.00 Corner on flume 60 lks N. heads N. runs S.W.
38.50 Dry Cr. 5 lks. 3 in deep in Canyon runs S.W. flume runs S.W.
40.10 Set sandstone 24×14×10 in 18 in the ground for 1/4 sec. cor. marked 1/4 on W face and raised a stone mound alongside.
40.30 flume in gulch runs S.E.
48.50 Ravine drains S.W.
65.00 " " S.W.
80.20 The cor to secs. 21.22.27 & 28.
Land. High Mount.
Soil 3 rate.
No timber.
High Mountains
on 80. 20 ch.
June 19 84

Subdivisions

North betw secs. 21 & 22
Var 16° 30' E.

17.00 Trail on ch. ridge bears W. &
40.00 Set granite 10×8×6 in. in the gr
for 1/4 sec. cor. marked 1/4 on W.
face and raised a stone mound
alongside.
80.00 Set a sandstone 15×12×8 in.
10 in. the ground for cor. to secs. 15, 1
21 & 22 marked with 3 notches
on S. & E. edges and raised
a stone mound alongside.
Land High Mountains
Soil 2nd rate
No timber
High Mountains
on 80 chs.

BOOK-A

40.00 Set to
80.45 Inter
cor. to
Trun

14.00 Gulch
40.23 Set
ground
W. face
along
58.00 Gulch
80.45 The cor
land
Soil
No

1 N. R. 1 E.

East on random line
betw. secs. 15 & 22
Var. 16° 30' E.

40.00 Set temp 1/4 sec. cor.
80.45 Intersect N & S line 65 lks S. of
cor to secs. 14, 15, 22, 23 from which
Trim S. 89° 32' W on true line
betw secs. 15 & 22
with same var.

14.00 Gulch drains N. W.
40.23 Set limestone 20×10×7: 14: the
ground for 1/4 sec. cor. marked 1/4 on
N face and raised a stone mound
alongside

58.00 Gulch drains N. W.
80.45 The cor to secs. 15. 16. 21 & 22.
Land. High Mts.
Soil 2nd rate
No timber.
High Mountain on 80.45 chs —

Subdivisions

North between secs. 15 & 16
Var. 16°30' E.

9.00 City Creek 20 lks wide 30 in deep runs S.W. in canyon.
11.50 Road bears N.E. & S.W.
12.00 Ascend.
40.00 Set sandstone 24×12×12 18 in the ground for 1/4 sec. cor. marked 1/4 on W face and raised a stone mound alongside
46.50 Ridge bears N.W. & S.E.
62.50 " " do
80.00 In hollow dr. S.E. set cobble 30×14×6 in 20 in the ground for cor to secs. 9.10.15 & 16 marked with 4 notches on Sand 3 on E edges and raised a stone mound alongside
Land Mountainous
Soil 3 rate
No timber
High Mountains on Wed

BOOK-A-202

T. 1 N. R. 1 E.

East on random line
between secs. 10 & 15
Var 16° 30' E

40.00 Set temp. 1/4 sec cor.
80.75 Intersect N & S line 42 lks. N of
cor to secs. 10. 11. 14 & 15 from which I run
N. 89° 42' W. on true line
between secs. 10 & 15.
with same var.

9.00 Gulch drains S.
24.00 " " S.
40.38 Set sandstone 11 x 8 x 8. 7/8 the ground
for 1/4 sec. cor. marked 1/4 on N face &
raised a stone mound alongside.
54.00 Gulch drains S.
62.00 Ridge bears N W & S E.
72.00 Gulch drains S.
80.75 The cor. to secs. 9. 10. 15 & 16.
Land High Mount.
Soil 3 rate.
No timber.
High Mountains on 80.75 ch.

June 20 - 84

Subdivisions

North between secs. 9 & 10
Var 16° 30' E.

10.00 Ridge bears N.W. & S.E.
22.00 " " N.E. & S.W.
40.00 In deep ravine drains N.W.
Set sandstone 10 x 9 x 6 in 7 in the
ground for 1/4 sec. cor marked 1/4
on W face and raised a stone
mound alongside, from which
An aspen 4 in diam. bears W. 45 lk dist
marked 1/4 S. B. T.
78.00 Enter Canyon
79.45 Spr. branch 10 lks. wide 5 in. deep runs
79.80 Road bears N.W. & S.E.
80.00 Set sandstone 14 x 8 x 6 in 9 in the
ground for cor. to secs 3.4.9 & 10. mark
with 5 notches on S and 3 on E edges
& raised a stone mound alongside
Land. High Mountains.
Soil 2nd rate.
No timber.
High Mountains,
on 80 chs.

BOOK-A-202

N. R. E.

North on random line
betw secs. 3 & 4
Var 16° 30' E.

40.00 Set temp 1/4 sec cor.
79.30 Intersect N. boundary of Tp. 45
lks. E of cor. to secs. 3 & 4 previously
set by me from which Tone
S. 0° 19' E. on tow line
betw secs. 3 & 4.
with same var.
25.00 Gulch drains N. W.
79.30 Set sandstone 10×10×7 in 7 in
the ground for 1/4 sec cor. marked
1/4 cor W face and raised stone
mound alongside.
56.00 Ridge bears E & W.
79.30 The cor. to secs. 3. 4. 9 & 10.
Land High Mountains
Soil 3 rate
No timber.
High Mountains
on 79.30 ch.
June 20 '84

Subdivisions

From the cor. to secs. 32 & 33
Salt Lake Base line being a sandst
16×12×12 firmly set in the ground
properly marked with stone mou
alongside, from which I run
North on resurvey line
between secs. 32 & 33
Var 16° 30' E.
On account of buildings on line
I offset W. 2 chs. then N on offs
line and take notes on same.

5.40 E & W. Street.
18.00 Road bears E & W. Enter dense
sagebrush.
24.00 Brick kilns E & W of line
28.00 House 50 chs East
40.00 Offset 2 chs. E. to true line where
I find the old corner thrown over
which I reset being a limestone
18×6×5 in 12 in the ground for 1/4 sec cor.
marked 1/4 on W face and raised a
stone mound alongside.
50.00 Ascend
80.00 No trace of old cor. set a sandst
20×12×8 in 15 in the ground for cor

BOOK-A-202

secs. 28. 29. 32 & 33 marked with 1 notch on S and 4 on E edges and raised a stone mound alongside.
Land. Rolling & level
Soil 1 & 2 rate.
No timber.
Dense undergrowth
on 62 lks.

East on random resurvey line
betw secs. 28 & 33
Var 16° 30' E.

40.00 Cor. knocked over, set temp 1/4 sec cor.
80.20 Intersect N & S line at cor to secs. 27. 28. 33 & 34. I adjust my chain accord. and run West on true line
betw secs. 28 & 33
with same var.
2.00 Deep ravine heads N. dr. S.E.
7.00 Ridge bears N & S.E.
22.50 Gulch drains S.E.
40.00 Reset orig. sandstone 18×6×6 in 12 in in the ground for 1/4 sec. cor. marked 1/4 on N face and raised a stone mound alongside.

Subdivisions Sp.

68.00 Gulch drains S.E.
80.00 The cor. to secs. 28. 29. 32 & 33
Raised. Mountainous
Soil. 2 & 3 rate
No timber.
Dense undergrowth on
8 & 30 chs.

North on reservey line
betw secs. 28 & 29
Var 16° 30' E.

12.35 Trail bears E & W.
20.00 Gulch drains S.W.
40.00 In small ravine dr. W. find the
old cor thrown down which I re-
being a sandstone 20×10×8 in 12 in the
ground for 1/4 sec. cor. marked 1/4
on W face and raised a stone mound
alongside.
47.00 Gulch drains S.W.
80.00 No trace of old cor. set quartzite
20×10×6 in 12 in the ground for cor to
secs. 20. 21. 28 & 29 marked north
2 notches on S and 4 on E edges & raised
a stone mound alongside.

N. N. E.

Rugd. Mountainous
Soil - 3 rate.
No timber
High Mountains on 00 chs.

East on random line
betw. secs. 21 & 28
Var 16° 30' E.

40.00 Set temp 1/4 sec. cor.
80.20 Intersect U & S line 23 lks N of
cor. to secs. 21. 22. 27 & 28 from which Sun
N. 89° 50' W on true line
betw. secs. 21 & 28
Var. 16° 30' E.
6.00 Ravine dr. S.
16.50 Trail on ridge bears W & S.W.
25.00 Ravine drains N.W.
40.10 On ridge bears N W & S.E. set
Granite 12×9×6 in the ground for
1/4 sec. cor. marked 1/4 on W face and
raised a stone mound along side.
from which Twin peaks bear S.E.
20 chs distant.
40.50 Trail bears N W & S.E.
80.20 " " N.W. & N.E.

Subdivisions

60.00 Leave ridge bears E & N.W.
78.00 Ravine drains S.
80.20 The cor. to secs. 20. 21. 28 & 29
Land. High Mountains
Soil 2 rate.
No timber.
High Mountains
on 80.20

North betw. secs. 20 & 21
Var. 16° 30' E.

Ascend.
8.50 Ridge bears W. & S.W., trav
18.00 Ravine drains N.W.
40.00 Set sandstone 14×10×7 in 9 in the ground for 1/4 sec. cor marked 1/4 on W face and raised a stone mound alongside.
53.00 City Cr. 40 lks wide 2 ft deep runs S. in canyon.
54.00 Road in ~~[illegible]~~ canon bears S.W. & N.E. ascend
80.00 Set sandstone 16×10×8 in 12 in the ground for cor to secs. 16. 17 & 21. marked with 3 notches on Sa 4 on E edges and raised a stone

BOOK-A-202

Tp. 1 N. R 1 E.

mound alongside.
Layed. High Mount.
Soil 2nd rate.
No timber.
High Mountains on 80 chs.

Eastern random line
betw secs. 16 & 21
Var 16° 30' E.

40.00 Set temp 1/4 sec. cor.
80.25 Intersect N & S line 24 lks S. of cor.
to secs. 15. 16. 21 & 22 from which I run
S. 89° 50' W on true line
betw. secs. 16 & 21
with same var.
10.50 Enter canyon
11.00 City Creek 20 lks wide 24 in deep runs
W. heads N.E.
14.85 Leave creek
15.00 Road bears N & S.W.
17.00 Ascend
28.50 Gulch drains S. with Spr. branch 4 lks wide
3 ins deep runs S.
37.00 Spr. branch 4 lks. wide 3 in deep in Gulch runs S.

Subdivisions

4.013 Set sandstone 16×12×8: 12: the ground for 1/4 sec cor marked 1/4 on N face and raised a stone mound alongside.

78.25 Gulch dr. S.E.

80.25 Thence to secs. 16. 17. 20 & 21.
Land. High Mount.
Soil Drift.
No timber
High Mountain on 80.25 on June 21. 84

North betw secs. 16 & 17
Var 16° 30' E.

40.00 Set quartzite 20×10×4: 15: the ground for 1/4 sec. cor. marked 1/4 on N face and raised a stone mound alongside.

45.00 Gulch drains S.E.

53.00 " " S.E.

65.00 " " S.E.

80.00 Set quartzite 14×10×6: 9: the ground for cor to secs. 8 & 9. 16 & 17 marked with 4 on S & E edges, raised a stone mound alongside.

BOOK-A-202

S. N. R. 1 E.

Land. High Mountains
Soil 2nd rate.
No timber.
High Mountains on 80 chs.

Easton random line
betw secs. 9 & 16
Var 16° 30' E.

40.00 Set temp 1/4 sec cor
80.65 Intersect N & S line 27 lks S.
of cor. to secs. 9. 10. 15 & 16 from which
Trees S. 89° 48' W on true line
betw secs 9 & 16.
with same var.
4.00 Ridge bears N & S.
13.00 Gulch drains S.
25.00 " " S.
30.00 " " S.
36.00 Ridge bears S & N.
40.33 Set quartzite 22 x 20 x 16: 1/4 th
ground for 1/4 sec. cor. marked
1/4 on N face and raised a stone
mound along side.
62.00 Ravine drains S.E.

Subdivisions

72.00 Ravine drains S.E.
80.65 The cor. to secs. 8.9. 16 & 17.
Land. High Mount.
Soil 1st rate
No timber
High Mountainous
on 80.65 chs

Note. The cor to secs 4.5.8 & 9 [illegible]
set, therefore I run
North on a random line
betw secs. 8 & 9
Var 16° 30' E.

40.00 Set temp 1/4 sec cor.
80.16 12 lks E. of established cor. to secs
4.5.8 & 9 being a lime stone 16×10×
firmly set in the ground & proper
marked. I adjust my instr
& chain accordingly and run
South on a true line betw
secs. 8 & 9
with same var.

22.00 Ridge bears N.W. & S.E.
40.00 Set quartzite 24×10×8 in 15 the
ground for 1/4 sec cor marked

Sp. 1 N. R 1 E.

1/4 on W face and raised a stone mound alongside

59.00 Ravine drains N. W.

65.00 Ridge bears N. & S. W.

80.00 The cor to secs. 8. 9. 16 & 17.

Land High Mountains

Soil 2nd rate.

No timber.

High Mountains on 80 chs.

Exit on a random line betw secs. 4 & 9

Var 16° 30' E.

40.00 Set temp. 1/4 sec. cor.

80.70 Intersect N. & S line 34 lks N of cor to secs. 3. 4. 9 & 10 from which I run

N. 89° 45' W on true line betw secs. 4 & 9 with same var.

3.75 Road bears N W & S E.

5.40 Ditch runs N. W.

9.00 Spr. branch 5 lks wide 7 in deep run N. W.

Subdivisions

10.00 Ascend
15.50 Road in hollow drains N.
40.35 In deep ravine dr N. set granite
24 x 12 x 10 : 18 : the ground for 1/4
sec. cor. marked 1/4 on N face
and raised a stone mound
alongside.
51.00 Ravine drains N.
64.00 " " "
80.70 The cor to secs. 4. 5. 8 & 9.
Land High Mountains
Soil 2nd. rate
No timber
High Mountains
on 80.70

BOOK-A-202

N. R. S. E.

North on random line
betw. secs. 4 & 5.
Var. 16° 30' E.

[illegible]00 Set lemp 1/4 sec. cor.
[illegible]9.45 Intersect N. boundary of Lp
43 lks. E. of cor. to secs. 4 & 5 set
by me from which I run
S. 0° 18' E on true line
betw secs. 4 & 5.
with same var.
[illegible]6.00 Ridge bears N.W. & S.E.
[illegible]9.45 Set sandstone 12×7×7: 8: the
ground for 1/4 sec. cor. marked
1/4 on W face and raised a stone
mound alongside.
[illegible]6.00 Road bears N.W. & S.E.
[illegible]7.20 Spr. branch 5 lks wide. 4 deep runs N.W.
in canyon. Accend.
[illegible]9.45 The cor. to secs. 4. 5. 8 & 9.
Land High Mountains
Soil 3 rate.
No timber.
High Mountains on [illegible]9.45 ch.
June 23. 84

Subdivisions

From the cor. to secs. 28. 29. 32 & 3
previously set by me I run
West on resurvey line
betw secs. 29 & 32
Var 16° 30' E.

4.00 Ravine drains S.
18.00 Ridge bears N & S.
30.00 Ravine drains S.
40.22 found old cor. thrown over, which
reset being a sandstone 16×8×6 in 12
the ground for 114 sec. cor. marked 44 on
N face and raised a stone mound alongside
42.00 Ravine drains S.W.
63.00 Ravine " S.
69.00 Road bears N & S.
80.45 The cor. to secs. 29. 30. 31 & 32 knocked
over which I reset being a sandst 16×
11 in the ground for cor. to secs. 29. 30. 31 & 32
marked with 1 notch on S and 5 on
E edges & raised a stone mound alongside
hand. High Mountains
Soil 2nd rate.
No timber
High Mountains on 80.45 o

BOOK

40.00 No trac
in the g
W face a
57.00 Bottom
80.00 Old cor
being
for cor
with
and ra
hand
Soil

BOOK-A-202

N. R. 1 E.

North on resurvey line
between secs. 29 & 30
Var 16° 30' E.

40.00 No trace of old cor. set sandstone 15×8×6 in
10 in the ground for 1/4 sec. cor. marked 1/4 on
W face and raised a stone mound alongside.

57.00 Bottom of flat hollow heads E.

80.00 Old cor. thrown over, which I reset
being a sandstone 16×10×4 - 11 in ground
for cor. to secs. 19. 20. 29. 30. marked
with 2 notches on land 5 on E edges
and raised a stone mound alongside.

Land. Mountainous
Soil 3 rats
No timber
High Mountains on 80 Lks.

Subdivisions Tp.

East on random line
betw. secs. 20 & 29
Var 16° 30' E.

40.00 Set temp. 1/4 sec. cor.
80.32 Intersect N & S line at cor. to secs.
20. 21. 28 & 29 from which Sun
West on true line
betw. secs. 20 & 29
with same var.
5.00 Trail bears N.W., N.E. & S.E.
40.16 Set quartzite 10×8×7. 7. the ground
for 1/4 sec. cor. marked 1/4 on N face
and raised a stone mound alongside
51.00 Gulch drains S.W.
57.00 Ridge bears N.E. & S.W.
80.32 The cor. to secs. 19. 20. 29 & 30.
Land, High Mountains
Soil 2nd rate.
No timber.
High Mountains on
80.32 ch

BOOK-A-202

S. N. P. 1. E.

North betw. secs. 19 & 20
Var 16½ E.

Descend

13.00 City Cr. in canyon 28 lks wide, 10 in deep runs S.W.

18.00 Conglomerate rock 18 ft diam.

19.00 Road bears N.E. & S.W.

33.75 Gulch drains S.E. heads N.W.

40.00 Set a Cobble stone 14×8×6 in. g. the ground for 1/4 sec. cor. marked 1/4 on W. face and raised a stone mound alongside.

56.00 Hollow drains E.

67.00 Gulch drains S.E.

80.00 Set a Cobble stone 14×9×6 in. g. the ground for cor to secs. 17. 18. 19 & 20 marked with 5 notches on E. & 3 on S. edges and raised a stone mound alongside.

Land: Mountainous

Soil 3 rate

No timber

High Mountains on 8 chs.

Subdivisions

Eastern random line
between secs. 17 & 20
Var 16° 30' E.

40.00 Set temp 1/4 sec. cor.
80.60 Intersect W. Line 42 lks N of
cor. to secs. 16. 17. 20 & 21 from which
Trim N. 89° 42' W. on true line
with same va.
between secs. 17 & 20
16.00 Spr. branch 5 lks wide 3 deep runs S.
39.50 Gulch drains S.
40.30 Set sandstone 14 x 12 x 8 : 9 :
the ground for 1/4 sec cor. marked
1/4 on W face and raised a stone
mound alongside.
43.50 Gulch drains SE.
47.00 " " "
61.50 " " "
80.60 The cor to secs. 17. 18. 19 & 20
Land High Mountains
Soil 2nd rate
No timber
High Mountains on 80.60
June 24 84

BOOK-A-

1 9

W

40.00 Set t
80.90 Inter
N of c
quarty
in the
from

37.50 Gul
40.90 Set
for 1/4
raise
69.00 Gul
80.90 The
Lan
Soi
No

BOOK-A-202

1 N. R. 4 E.

Well on random line
between secs. 18 & 19
Var 16° 30' E.

40.00 Set temp 1/4 sec. cor.
80.90 Intersect W. boundary of tp. 60 lks
No of cor. to secs. 18 & 19 which is a
quartzite 16×10×8 in. firmly set
in the ground & properly marked
from which I run
N. 89° 34 E on true line
between secs. 18 & 19
with same var.
37.50 Gulch drains S. E.
40.90 Set sandstone 15×10×8. 10 in. the ground
for 1/4 sec. cor. marked 1/4 on W face and
raised a stone mound alongside.
69.00 Gulch drains SE.
80.90 The cor. to secs. 17, 18, 19 & 20
Land High Mountains
Soil Dr. rate
No timber.
High Mountains on 80.90 chs.

Subdivisions

The cor. to secs. 7.8.17 & 18 having been esta
before I run

North on a random line
between secs. 17 & 18
Var 16° 30' E.

40.00 Set temp. 1/4 sec cor

80.40 I find traces of old cor. To satisfy myself, that this is the original point, I retrace the line W. the notes of which will be given in their places. The line agrees with previous notes. I reestablish this point by setting a lime stone 15 x 1 in 10 in the ground for cor. to secs. 7.8.17 marked with 4 notches on 1 and 5 on Edges and raised a stone mound alongside.

I adjust my chain accordingly & run South on true line
between secs. 17 & 18
with same var.

6.00 Gulch dr. N. W.

40.00 Set sandstone 19 x 11 x 6 : 13 : the ground for 1/4 sec cor. marked 1/4 on W face and raised a stone mound alongside

45.00 Ridge bears NE & S. W

BOOK-A-2

1 M

80.00 The cor
Land
Soil
No tim
W
Eastw

40.00 Set temp
80.50 Intersec
to secs. 8
on Sa

42.00 Ridge
80.50 Gulch
40.25 Set lime
for 1/4 sec
raised

80.50 The cor
Land
Soil
No
Hig

BOOK-A-202

1 N. R 1 E.

8000 The cor to secs. 17. 18 19 & 20
Land High Mountains
Soil 2nd rate
No timber
High Mountains on 80 chs.

East on random resurvey line
betw secs. 8 & 17
Var 16° 30' E.

4000 Set temp 1/4 sec cor. New survey commences.

8050 Intersect N & S line 39 lks N. of cor
to secs. 8. 9. 16 & 17 marked with 4 notches
on Sand E edges from which Sun
N 89° 43' W on true line
betw secs. 8 & 17
with same var.

1200 Ridge bears E & S W.

30.50 Gulch drains N. W.

40.25 Set Limestone 10×10×8 : 6. the ground
for 1/4 sec. cor. marked 1/4 on N face and
raised stone mound alongside.

40.50 The cor to secs. 7. 8. 17 & 18.
Land Mountainous
Soil 3 rate
No timber
High Mountains on 80.50 ch

Subdivision

West on random resurvey
between secs. 7 & 18
Var 16° 30' E.

40.00 No trace of old cor. at temp 1/4 sec
cor.

80.12 Intersect West boundary of Cp.
10 lks north of cor to secs 7 & 18.
which is a quartzite 18×10×6
firmly set in the ground properly
marked & mound of stones
alongside. I adjust my inst
& chain accordingly and run
East on true line
between secs. 7 & 18
Var 16° 30' E.

10.00 Road bears N & S.
35.00 Ravine drains N. W.
40.00 Set Cabble stone 15×10×10: 10: the
ground for 1/4 sec cor. marked
1/4 on W face and raised a stone
mound alongside.
78.00 Ravine drains N. W.
80.00 The cor. to secs. 7. 8. 17 & 18.
Land. High Mount.
Soil 3 rate

1 N R 1 E.

No timber.
High Mountain on 80 chs.

North on resurvey line
between secs. 7 & 8.
Var 16° 30' E.

28.00 Hollow drain N. W.
40.00 Set sandstone 15 x 10 x 8 in 10 in the ground for 1/4 sec. cor marked 1/4 on W face and raised a stone mound alongside.
60.00 Enter flat hill bears N. W.
68.00 Leave same descend
72.00 fence bears N W & S E.
80.00 Find old corr. knocked over being a flint 14 x 12 x 10 in which I reset 9 in the ground for cor to secs. 5. 6. 7 & 8 marked with 5 notches on S & E edges and raised a stone mound alongside.
Land Mountainous
Soil 3 rate.
No timber
High Mountain on 80 chs

Subdivisions

East on random resurvey
betw secs. 5 & 8
Var 16° 30

40.00 No trace of old cor set temp 1/4 sec
80.00 Intersect N & S line at cor. to secs
4.5.8 & 9 from which Sun
West on true line
betw secs. 5 & 8.
with same var.
40.00 Set sandstone 13×12×7. 8. the
ground for 1/4 sec cor. marked
1/4 cor N face and raised a stone
mound alongside.
51.50 Ridge bears N. W & S.E.
74.25 Spr. branch in canyon 5 lks 3 ft deep
runs N. W.
79.50 fence bears N W & S.E.
80.00 The cor. to secs. 5.6.7 & 8
Land. Mountainous
Soil 2nd rate
No timber
High Mountains on 80 ch.

S. N. R. S. E.

Northern random line
between secs. 5 & 6
Var 16° 30' E.

40.00 No trace of old cor. set temp 1/4 sec cor.
80.30 Intersect N. boundary of Tp. at
cor. to secs. 5 & 6 formerly set by
me adjusting my chain [illegible]
South on true line
between secs. 5 & 6
with same var.
6.25 Creek in Canyon 10 lks wide 6 in deep
runs N W.
15.00 Road bears N W & S E around
22.00 Ridge bears N W & S E.
40.16 Set Cobble stone 14 x 10 x 10 in the ground
for 1/4 sec cor. marked 1/4 on W face
and raised a stone mound alongside.
59.00 Ridge bears N. W & S. E.
68.80 Spr. branch 5 lks. wide 3 in deep
runs N W. in hollow.
79.90 Fence bears N W & S E.
80.16 The g cor. to secs 5. 6. 7 & 8.
Land. High Mountains
Soil 3 rate
No timber
High Mountains on 80.16 lks.

Subdivision Tp. 1

General Descr

The add. land surv
in this township consis
mostly of mountains,
canyon and hollows cove
with dense undergrowth,
in which numerous
claim's are made.
The appl. Claims John Malquist claim is embr
in the W 1/2 of S E 1/4 of secs. 16, and
N W 1/4 of N E 1/4 sec 21. his improve
consist of a hunter cabin, fen
and considerable ditching.
There are desert claims in this Tp
as follows. Thomas McNiel
S E of S. W 1/4 secd. S W 1/4 of S E
sec. 4.
Stanley H. Clawson West half
N E 1/4 & E half of N. W 1/4 secs. 14.
N. V. Jones the S W of N W 1/4 & N W 1/4
sec. 14.

Tp. 1 N. R. 1 E.

Adam Spiers, the S. 1/2 of N.E. 1/4 S.E. of N.W. 1/4. N. 1/2 of S.E. 1/4 & S.W. 1/4 Sec. 20.

B. Y. Hampton W. 1/2 & S.E. 1/4 of N.W. 1/4 Sec. 26.

There is a coal prospect in S.W. 1/4 of sec. 27.

Edward W. Koeber
U. S. dep. surv.

Blank

Page

BOOK-A-202

[4—LIST OF NAMES.]

A list of the names of the individuals employed by Edward N Koeber *United States deputy surveyor, to assist in running, measuring, and marking the lines and corners described in the foregoing field notes of the survey of* fractional North and East Boundaries and subdivisions T1N, R1E *of the Salt Lake base and meridian in the Territory of Utah, showing the respective capacities in which they acted.*

, *Compassman.*

L. Kloty, *Chainman.*

Rich Evans, *Chainman.*

, *Chainman.*

, *Chainman.*

T. Jenkins, *Axeman.*

F Schmidt, *Axeman.*

, *Flagman.*

Blank

Page

[5.—FINAL OATHS OF ASSISTANTS.]

We hereby certify that we assisted Edward W Koeber United States deputy surveyor, in surveying all those parts or portions of the fractional North and East Boundaries and subdivisions T 1 N R 1 E

of the Salt Lake base and meridian in the Territory of Utah, as are represented in the foregoing field notes as having been surveyed by him and under his direction; and that said survey has been in all respects, to the best of our knowledge and belief, well and faithfully surveyed, and the corner monuments established according to the instructions furnished by the United States surveyor-general for Utah.

, Compassman.

L Klotz, Chainman.

R. Evans, Chainman.

, Chainman.

, Chainman.

J. Jenkins, Axeman.

F. Schmidt, Axeman.

, Flagman.

Subscribed and sworn to before me this 25th day of June 1884

Edward W Koeber

U S Deputy Surveyor

Blank

Page

[6.—FINAL OATH OF UNITED STATES DEPUTY SURVEYOR.]

I, Edward N. Koeler United States deputy surveyor, do solemnly swear that in pursuance of instructions received from Ira Salomon United States surveyor-general for Utah, bearing date of the 4th day of December, 1883, I have well, faithfully, and truly, in my own proper person, and in strict conformity with the instructions furnished by the United States surveyor-general for Utah, the surveying manual and the laws of the United States, surveyed all those parts or portions of fractional North and East Boundaries and subdivisions T1 S R1 E

of Salt Lake base and meredian in the Territory of Utah, as are represented in the foregoing field notes as having been surveyed by me and under my directions; and I do further solemnly swear that all the corners of said survey have been established and perpetuated in strict accordance with the surveying manual, printed instructions, the special written instructions of the United States surveyor-general for Utah, and in the specific man-

ner described in the field notes, and that the foregoing are the **TRUE** *field notes of such survey; and, should any fraud be detected, I will suffer the penalty of perjury, under the provisions of an act of Congress, approved August 8, 1846.*

Edward W. Fuller

United States Deputy Surveyor

Subscribed and sworn to before me this 21st *day of* July *1884*

Edward Michael

Notary Public

BOO

U. S. SURVE

Salt Lak

The fore

Township No.

Executed by

Under

day of

amined, the nec

the said field

hereby approve

BOOK-A-202

73

U. S. SURVEYOR GENERAL'S OFFICE,

Salt Lake City, Utah, July 26 1884

The foregoing field notes of the survey of the Fract. Subdivision

Township No. 1 N. Range No. 1 E.

Executed by Edward W. Kocher

Under his contract No. 122 of the 4th

day of December 1883, in the month of June 1884, having been critically examined, the necessary corrections and explanations made, the said field notes, and the surveys they describe are hereby approved.

Fred Salomon

U. S. Surveyor General for Utah.

Blank

Page

BOOK-A-202 OK

REPORT: 1885 75

Filed 188

Examined by .....

Transcribed by Henry R. McAtkinson

Compared by Atkinson & Michaelis

FIELD NOTES

OF THE SURVEY OF THE

the claim of Charles Popper

Subdivisions of Sec. 33

OF

Township No. 1 North

Range No. 1 East

OF THE

SALT LAKE MERIDIAN

IN

UTAH TERRITORY,

AS SURVEYED BY

Edward [illegible] Roeber

U. S. Deputy Surveyor,

Under ~~his Contract No.~~ Special Instructions

Dated May 5 1885

Survey commenced May 22 1885

Survey completed May 23 1885

NAMES AND DUTIES OF ASSISTANTS.

.....	*Compassman.*
.....	*Chainman.*
.....	*Chainman.*
.....	*Chainman.*
.....	*Chainman.*
.....	*Axeman.*
.....	*Axeman.*
.....	*Flagman.*

BOOK-

[2.—Pl

We, S.W

and T.W

do solemnly su
fully execute t
we will level t
ground and p
ing or droppi
the true distan
true length of
ing, to the best
accordance wi
survey of the

Popper

R. E.

of the Salt Lak
tory of Utah.

S.W

S.V

Subscribed and

day of W

[2.—PRELIMINARY OATH OF CHAINMEN.]

We, S M Paucak

and T W Whitely

do solemnly swear that we will well and faithfully execute the duties of chain carriers; that we will level the chain upon even and uneven ground and plum the tally pins, either by sticking or dropping the same; that we will report the true distance to all notable objects, and the true length of all lines that we assist in measuring, to the best of our skill and ability, and in accordance with instructions given us, in the survey of the Claim of Charles Pohfer in Sec 33 T 1 S R 1 E

of the Salt Lake base and meridian in the Territory of Utah.

S M. Paucak, Chainman.

T. W. Whitely, Chainman.

, Chainman.

, Chainman.

Subscribed and sworn to before me this 21

day of May 1885

Edward W. Kirby

U. S. Dep Surv

Blank

Page

BOOK-A-202

[3.—PRELIMINARY OATH OF AXEMEN.]

We, James Wyle

and T. Park

do solemnly swear that we will well and truly perform the duties of axemen, in the establishment of corners and other duties, according to instructions given us, and to the best of our skill and ability, in the survey of the claim of Charles Popper in Sec 33, T 1 S R 1 E

of the Salt Lake base and meridian in the Territory of Utah.

James Wylie, Axeman.

T. Park, Axeman.

Subscribed and sworn to before me this 21 day of May 1885

Edward W. Roeber
U. S. dep surv.

Blank

Page

BOOK-A-202

[4—LIST OF NAMES.]

A list of the names of the individuals employed by Edward W Koeler *United States deputy surveyor, to assist in running, measuring, and marking the lines and corners described in the foregoing field notes of the survey of* the claim of Charles Popper in Sec 33 T 1 S R 1 E

of the Salt Lake base and meridian in the Territory of Utah, showing the respective capacities in which they acted.

—, *Compassman.*

J. H. Pancake, *Chainman.*

J. W. Whitely, *Chainman.*

—, *Chainman.*

—, *Chainman.*

James W. Hir, *Axeman.*

J. Park, *Axeman.*

A. C. Connell, *Flagman.*

Blank

Page

BOOK-A-202

Subdivisional Sec. 33. T. 1 N. R. 1 E.

May 22nd 1883

Surveyor commenced with a Gurley's improved Solar Compass tested by an observation on Polaris. From the cor. to secs. 32 & 33 on Salt Lake Base line through R. 1 E. which is a sandstone 16 x 12 x 12" firmly set in the ground marked with 2 notches on W and 4 on E edges. From North on reserve line between secs. 32 & 33

Var. 16° 30' E.

Nor. It being impossible to chain on this line on account of obstacles I offset West 20 lks.

40.00 Offset East 20 lks. where I find the 1/4 sec. cor. laying down which I find being a limestone 18 x 6 x 5" 12" in the ground marked 1/4 on W face and raised a stone mound alongside.

50.00 Ascend

80.00 I launch the cor. to secs. 28. 29. 32 & 33 being a sandstone 20 x 12 x 8" firmly set in the ground, marked

Subdivisions of Sec

with 1 notch on S and 4 on E edges
and stone mound alongside E.
Land. Valley & rolling hills
Soil 1st 2 rate.
No timber.

East on running line
betw. secs. 28 & 33
Var. 16° 30' E.

12.00 Gulch with rock drain S.E.
40.00 The cor. being a sandstone 18x6
firmly set in the ground marked
with 1/4 on N face and stone
mound alongside.
57.50 Gulch drained S.E.
73.00 Top of ridge bears N W & S.E.
80.00 Intersect the cor. to secs. 27, 28,
33 & 34 which is a sandstone 24x8x3
firmly set in the ground, marked
with 1 notch on S. and 3 on E edges
and with stone mound
alongside E.
Land. Mountains
Soil 2nd rate.

No timber.

Then return to the cor. to secs. 32 & 33 on Salt Lake Baseline and run

East on survey line along South side of Sec 33.

Var. 16° 30' E.

Note. On account of obstacles I offset South 50 lks.

4+00 Offset North 50 lks. where I intersect the 1/4 sec cor. being a conglomerate 20×7×7" firmly set in the ground marked 1/4 on N face. with stone mound alongside.

49.50 Road bears N W & E.

56.50 Shooting range bears N E.

71.00 " " " " N E.

75.00 Offset 75 lks South

80.00 Intersect the cor. to secs. 33 & 34 on Salt Lake Base through R. 1 E. which is a limestone 22×14×4" firmly set in the ground marked with 3 notches on E & W edges mound of stone alongside

Subdivisions sec. 29

Land. Valley & bench
Soil 1 rate.
No timber.

Then I return to the cor. to secs 27.28.33 & run South on random line
betw. secs. 33 & 34
Var. 16° 30' E.

9.50 Top of ridge bears N E & S W. descend into deep cañon. It being impossible to chain across same cañon I cause a flag to be set at this point and one on opposite ridge. I then proceed to that flag and lay off a right angle base of 2 ds and one of 3 ds. and ascertain the distance by triangulating back to the flag.

Base of 2 ds. = ∠ 4° 19'. angle = 26, 48 ds.

Base of 3 ds. = ∠ 6° 28 angle = 26, 46 ds.

I split the difference of two links = 26, 47 ds.

35.00 Across cañon, ridge bears
" NE & S.W. descent.
40.00 Set a temp. 1/4 sec. cor.
Note. On account of very
steep & brushy hills, I leave
a flag at this point and proceed
to the cor. to secs. 33 & 34 on Salt
Lake Baseline lay off a
base West 10 ds and one 15 ds.
and ascertain the distance
between these two corners by
triangulation.
Base of 10 ds. = angle 14°4' = 39.90 ds.
" " 15 " = " 20°35 = 39.93.
I split the difference = 39.92 ds.
79.92 Intersect the cor. to secs. 33 & 34
as above described from which
I run North on true line
betw. secs. 33 & 34
with same var.
39.96 Set a liner stone 20×10×7"/15"
in the ground for 1/4 sec. cor.
marked 1/4 on W face and
raised a stone mound
alongside.

Sub division Sec 22.

79.92 The cor. to secs. 28, 27, 33 & 34
Land. Mountaining & bench
Soil & 2 rate.
No timber.

May 22

From the 1/4 sec. cor. to sec. 33 on the
Salt Lake base line Trun North
through the centre of sec. after
posting a flag on the 1/4 sec.
cor. north.

Var 16° 30' E.

10.00 Set a temporary post 3 ft long
3" square marked 1/32 on W face
10.40 fence bears E & W.
19.00 " " NW & SE
20.00 Set a temporary post 3 ft long 3" square marked
1/16 on W face.
20.35 fence bears NE & SW.
24.10 " " E & SW.
25.25 Road bears E & W.
27.00 Pig pen
27.04 fence bears E & W.
27.48 " "
28.00 Springbranch 2 lks wide 2" deep runs S.

Tp. N R 1 E.

8.25	Flume drains W in hollow, ascend
8.75	Road bears N E & W.
40.00	Set temporary a post 3 ft long 3" square for corner to centre of sec marked with 1/4 on W face and raised a stone mound alongside.
80.00	The 1/4 sec. cor. to secs 28 & 33 as above described.
	Land. Mountains & bench
	Soil 1 & 2 rate.
	No timber.
	From the 1/4 sec. cor. to sec. 32 & 33 Trim East through the centre of sec. after posting a flag on the 1/4 sec. cor. East
	Var. 16° 30' E.
.69	Fence bears S & E.
2.73	Set a post 3 ft long 3" square for the NW corner of C. Popper's claim.
4.00	Set a post 3 ft long 3" square marked 1/16 on N face.
1.10	Wash in gully drains S. W.
40.00	Intermit Stake.

Subdivisions Sec. 33.

60.00 Fence cor. W & S. set a post 3 p long 3" square marked 1/16 on N face for the N E cor. of C. Copp claim.

64.50 Flume trains S.W in cañon

64.61 Road in same.

64.70 Spring branch 4 lbs wide 1" deep runs S.W.

Ascend.

78.00 Ridge bears N E & S.W.

80.00 The 1/4 sec. cor. to secs. 33 & 34 as previously described

Land. Mountains

Soil 2 rate.

No timber.

Note. Finding that the lee stakes of the two centre in agree I leave them perm

Tp 1 N. R 1 E.

From a point 2.73 ds. East of 1/4 sec. cor. to secs. 32 & 33 & run South

Var 16° 30' E.

7.65 Ditch runs W.

12.02 Fence bears NW by N.

20.00 Set a post 3 ft long 3" square marked 1/4 on W face.

25.00 Fence bears E & W.

30.00 To a point 2.73 ds. E of sec. line where I set a stake 3 ft long 3" square marked 1/32 on W face for the S.W. cor. of C. Poppers claim.

From a point 10 ds North and 2.73 ds E of the cor. to secs. 32 & 33 on Salt Lake Base previously described Run East

Var 16° 30' E.

3 Fence bears N & S.

Wash drains S.W.

Road bears NE & SW fence bears SW & NE by E.

Subdivisions Sec 3

17.29 In gully drains S.W. set a post 3 ft long 3" square marked 1/32 on N face and raised a stone mound along side.
31.50 Ditch drains S.W.
30.29 Intersect the post.

From a point 20 dis W of cor. to secs. 33 & 34 on Salt Lake Base line S run North
Var 16° 30' E.
16.50 Ascend
20.00 Set a post 3 ft long 3" square marked 1/16 on W face. descend
36.60 Enter cañon, flume drains S.
36.80 Road bears S.W. & N.E.
37.10 Flume drains S.W.
40.00 Intersect the post.

From a point 20 dis. North of the 1/4 sec. cor. to secs. 33 Salt Lake base line S on East Var 16° 30' E.

Sp. N. R. E.

2.50 Road bears N E & S E.
3.00 Ascend.
20.00 Intersect the post.

From a point 20 ds East of cor. to secs. 32 & 33 on Salt Lake Base line Town North Var. 16° 30' E.

10.00 In gully intersect post
10.25 fence bears E & W.
14.85 Road bears N E & S W.
20.00 Set a post 3 ft long 3" square marked 1/16 on W face.
24.00 Wash & gully drains S W.
36.00 " " " "
40.00 Intersect the post.

From a point 20 ds North of the cor. to secs. 32 & 33 on Salt Lake Base line Town East Var 16° 30' E.

2.73 Set a post 3 ft long 3" square

marked 4/16 on N face for the SW cor. of the fractional NW¼ of SW¼.

2.79.	Fence bears N & S.
16.00	Wash drains S.W.
20.00	Intersect the post
23.50	Road bears NE & SW.
37.00	Gully drains NE & SW.
40.00	Intersect the post.

May 23 - 1885.

Thereby certify that I received payment in full from C. Popper for surveying his claim on the Fort Douglas Reservation and have no claim on the United States.

Edward W. Koebe
U. S. dep. surv.

[5.—FINAL OATHS OF ASSISTANTS.]

We hereby certify that we assisted Edward W Koeber United States deputy surveyor, in surveying all those parts or portions ~~of the~~ embraced in the claim of Charles Popper in Sec 33 T 1 S R 1 E

of the Salt Lake base and meridian in the Territory of Utah, as are represented in the foregoing field notes as having been surveyed by him and under his direction; and that said survey has been in all respects, to the best of our knowledge and belief, well and faithfully surveyed, and the corner monuments established according to the instructions furnished by the United States surveyor-general for Utah.

....., Compassman.

S M Cawcake, Chainman.

S. W. White, Chainman.

....., Chainman.

....., Chainman.

James W Hie, Axeman.

S. Park, Axeman.

A G Conwell, Flagman.

Subscribed and sworn to before me this 25 day of May 1885

Edward W. Koeber
U S deputy surv.

Blank

Page

BOOK-A-202

97

[6.—FINAL OATH OF UNITED STATES DEPUTY SURVEYOR.]

I, Edward W. Roeder

nited States deputy surveyor, do solemnly
wear that in pursuance of instructions received
om Fred Salomon
nited States surveyor-general for Utah, bear-
g date of the 5th day of May,
885, I have well, faithfully, and truly, in my
n proper person, and in strict conformity with
e instructions furnished by the United States
rveyor-general for Utah, the surveying man-
l and the laws of the United States, surveyed
ll those parts or portions of embraced
in the claim of Charles
Popper in Sec 33 Tp 1 N.
R 1 E

of Salt Lake base
d meredian in the Territory of Utah, as are
presented in the foregoing field notes as having
n surveyed by me and under my directions;
d I do further solemnly swear that all the cor-
rs of said survey have been established and
rpetuated in strict accordance with the sur-
ying manual, printed instructions, the special
itten instructions of the United States sur
yor-general for Utah, and in the specific man-

ner described in the field notes, and that the for
going are the **TRUE** *field notes of such survey*
and, should any fraud be detected, I will suff
the penalty of perjury, under the provisions of a
act of Congress, approved August 8, 1846.

Edward W. Toeber

United States Deputy Surveyo

Subscribed and sworn to before me this 25 *d*
day of May *1885*

Edward Michaelis

Notary Public

B

U. S. SUR

Salt

The f

Lubbock

Township N

Executed by

Under ~~*Cont*~~ *Sp*

day of

amined, the

the said fie

hereby appr

BOOK-A-202

U. S. SURVEYOR GENERAL'S OFFICE,

Salt Lake City, Utah, May 28 1885

The foregoing field notes of the survey of the Subdivision Sec. 38.

Township No. 1 N. *Range No.* 1 E.

Executed by Edward T. Rosier

Under ~~*Contract No.*~~ Special Instructions *of the* 5

day of May 1885, *in the month of* Dec. 1885, *having been critically examined, the necessary corrections and explanations made, the said field notes, and the surveys they describe are hereby approved.*

Fred Salomon

U. S. Surveyor General for Utah.

Blank

Page

BOOK-A-202

REPORT:

Filed 101 188

Examined by

Transcribed by E. Michaelis

Compared by E. Michaelis, H. Atkinson

FIELD NOTES

OF THE SURVEY OF THE

East boundary and fractional South boundary

OF

Township No. 21 South

Range No. 4 West

OF THE

SALT LAKE MERIDIAN

IN

UTAH TERRITORY,

AS SURVEYED BY

Shadrach M. Richardson

U. S. Deputy Surveyor,

Under his Contract No. 123.

Dated December 19th 1883.

Survey commenced April 29th 1884

Survey completed April 30th 1884.

NAMES AND DUTIES OF ASSISTANTS.

.....*Compassman.*

.....*Chainman.*

.....*Chainman.*

.....*Chainman.*

.....*Chainman.*

.....*Axeman.*

.....*Axeman.*

.....*Flagman.*

BOOK-A-202

[PRELIMINARY OATH OF COMPASSMAN.]

I, J. S. Giles

do solemnly swear that I will well and truly perform the duties of compassmen, according to instructions given me, and to the best of my skill and ability, in the survey of the Exterior and Subdivision Lines of Township 21 South Range 4 West

of the Salt Lake base and meridian in the Territory of Utah.

J. S. Giles, Compassman.

Subscribed and sworn to before me this 28th day of April 1884

B. J. Stringam
Justice of Peace

Blank

Page

[PRELIMINARY OATHS OF CHAINMEN.]

We, James S. Giles
and Hiram Mace Jr.

do solemnly swear that we will well and faithfully execute the duties of chain carriers; that we will level the chain upon even and uneven ground and plumb the tally pins, either by sticking or dropping the same; that we will report the true distance to all notable objects, and the true length of all lines that we assist in measuring, to the best of our skill and ability, and in accordance with instructions given us, in the survey of the exterior and subdivision lines of township 21 South range 4 West

of the Salt Lake base and meridian in the Territory of Utah.

James S. Giles, Chainman.
Hiram Mace Jr. Chainman.
, Chainman.
, Chainman.

Subscribed and sworn to before me this 28
day of April 1884

J. S. Giles
Notary Public

Blank

Page

BOOK-A-202

[3 PRELIMINARY OATH OF AXEMEN.]

We, Orson B. Warner

and B A Stringam

do solemnly swear that we will well and truly perform the duties of axemen, in the establishment of corners, and other duties, according to instructions given us, and to the best of our skill and ability, in the survey of ~~township 21 South range 4 West~~ the exterior and subdivision lines of township 21 South range 4 West

of the Salt Lake base and meridian in the Territory of Utah.

Orson B. Warner, Axeman.

B. A. Stringam, Axeman.

Subscribed and sworn to before me this 28th day of April 1884

J. Nes

Notary Public

Blank

Page

BOOK-A-202 109

Re-survey E. Boundary T. 21 S. R. 4 W.

On the night of April 28th 1884, I took an observation on the star Polaris, in accordance with instructions contained in the Manual of Surveys and drove pickets on the line thus established. Survey commenced April 29th 1884 with a Burt's improved solar compass.

Before commencing this survey I test my compass on the line established last night and find it correct.

In surveying a portion of the E. and S. boundaries of this township was unable to find permanent corners on either of said lines near the unsurveyed portion. I therefore begin at the Standard cor. to Tps. 20 S. R.s 3 and 4 W. which is a sandstone 18 x 16 x 10 ins. 12 ins. in the

Re-Survey E boundary T. 21 S. R. 4

Chains	ground, in mound of stone with six notches on E. W. W. edges from which A cedar 24 ins. in diam. brs. S. 60° E. 100 lks. dist. marked T. 21 S. R. 3 W. S. 6 B. T. Thence I run. South on a true re-survey line bet. secs. 1 and 6. Va. 16° 00' E.	Chains
10.00	Ridge 30 ft. high decends W.	
13.00	Hollow 30 ft. deep decends S. W.	
15.50	Ridge brs. N. W. and S. E.	
20.00	Creek 30 lks. wide runs N. W.	
29.00	Foot of hill. Ascend.	
40.00	Set granite stone 18 x 16 x 12 ins. 12 ins. in the ground for 1/4 sec. cor. marked 1/4 on N. face, and raised a mound of earth and stone alongside.	13.00
		26.50
60.00	Ridge 75 ft. high brs. brs. N. 10° E. and S. 10° W.	
69.00	Wash drs. S. 70° W.	
80.00	Set white flint stone 18 x 12 x	30.00

BOOK-A-202

Salt Lake Meridian

Chain 12 ins. 12 ins. in the ground for cor. to secs 1, 6, 7 and 12, marked 1 notch on N. and 5 notches on S. edges, and raised a mound of stone alongside.
Land, rolling bench.
Soil, gravel, 2nd rate.
Timber, scattering cedar.
Good grass.
Dense undergrowth sage on 80.00 chs.

South on a true re-survey line bet. secs. 7 and 12.
Va. 16°00' E.

13.00 Goat fence bs. N. E. and S. W.
Enter Edward Partridges meadow.

26.50 Leave meadow which contains about 15 acres, line passes through centre
Goat fence bs. N. W. & No. E.

30.00 Wood road bs. E. and W.

Re-Survey E. boundary T. 21 S. R. 4 W.

Chains	
31.50	Sheep fold 100 lks. across, line passes through centre. A spring 100 lks. west. Good water.
35.00	Road from Fillmore to Hayfield bs. N. 80° E. S. 80° W.
40.00	Set granite stone 18 x 8 x 6 ins. 12 ins. in the ground for 1/4 sec. cor. marked 1/4 on N. face, and raised a mound of earth and stone alongside.
56.00	North Canyon Creek 24 lks. wide runs N. W.
64.00	Ridge 20 ft. high decends W.
65.00	Hollow 20 ft. deep decends W.
67.50	Ridge 40 ft. high bs. W.
71.50	Wash 3 ft. deep. Hollow 80 ft. deep bs. N. W.
80.00	Set sandstone 24 x 12 x 8 ins. 18 ins. in the ground for cor. to secs. 7, 12, 13 and 18. marked 2 notches on N. and 4 notches on S. edges,

BOOK-A-202

Salt Lake Meridian

Chains from which
A cedar 18 ins. in diam. bs. N.
39° E. 142 lks. dist, marked
T. 21 S. R. 4 W. S. 7 B. T.
A cedar 3 ins. in diam bs. No.
66 W. 114 lks dist, marked
T. 21 S. R. 3 W. S. 12 B. T.
A cedar 12 ins. in diam. bs. S.
12° E. 94 lks. dist, marked
T. 21 S. R. 3 W. S. 18 B. T.
A cedar 10 ins. in diam. bs.
S. 15° W. 198 lks. dist, marked
T. 21 S. R. 3 W. S. 13 B. T.
Land, rolling.
Soil, gravel 2nd rate.
Cedar timber. Good grass.
Dense undergrowth oak
brush on 66.50 chs.

South on a true Re-Survey
line bet. secs. 13 and 18.
Var. 16° 00' E.
9.00 Hollow 60 ft. deep drs. W.
12.50 Ridge 50 ft. high drs. No. W.

Re-Survey E. boundary T. 21 S. R. 4 W.

Chains	
16.50	Hollow 50 ft. deep drs. No. W.
25.00	Ridge drs. N. W.
31.50	Hollow 20 ft. deep drs. No. W.
40.00	Set limestone 16 x 10 x 6 ins. 11 ins. in the ground, for 1/4 sec. cor. marked 1/4 on No. face, and raised a mound of earth and stone along side
41.00	Ridge drs.
53.00	Hollow 50 ft. deep drs. S. W.
62.00	Knoll 60 ft. high
79.25	Hollow 40 ft. deep drs. S. W.
80.00	Set white flint stone 16 x 12 x 6 ins. 11 ins. in the ground for cor. to secs. 13, 18, 19 and 24, marked 3 notches on No. and S. edges, from which A cedar 10 ins. in diam. bs. N. 29° E. 1450 lks. dist., marked= T. 21 S. R. 4 W. S. 18 B. T. No other tree within limit. and raised a mound of

Chains
5.00
12.00
15.50
30.00
33.25
40.00

BOOK-A-202

Salt Lake Meridian

Chain earth and stone alongside
Land, rolling bench.
Soil, mixed with gravel 2nd rate.
Cedar timber. Good grass
Dense undergrowth oak brush on 8000 chs.
April 29th 1884"

South on a true Rx survey line bet. secs. 19 and 24.
Va. 16° 00' E.

5.00 Flat ridge decends W.
12.00 Spring branch runs N. W.
15.50 Lime kiln 50 lks W. of line.
Ascend limestone mountain.
30.00 Top of limestone mountain 300 ft. high brs. N. and S.
33.28 A cedar 12 ins. in diam.
40.00 Set blue limestone 24 x 12 x 6 ins. 18 ins. in the ground, for 1/4 sec. cor. marked 1/4 on N. face, from which A cedar 20 ins. in diam. brs. S. 45° E 15 lks. dist., marked

Re-Survey Boundary T. 21 S. R.

Chains	
	1/4 S. B. T.
	A cedar 16 ins. in diam. bs. N. 80° W. 25 lks. dist, marked 1/4 S. B. T.
45.10	Wood road bs. No. E. and S. W.
45.90	Foot of mountain. Wash bs S. W.
55.00	Hill slopes W.
59.00	Hollow descends No. W.
75.00	Ridge 100 ft. high. S W
80.00	Set red sandstone 24 x 12 x 3 ins. 18 ins. in the ground for cor. to secs. 19, 24, 25 and 30, marked 4 notches on N. and 2 notches on S. edges, and raised a mound of earth and stone alongside.
	Land, rolling and rocky.
	Soil, rock and gravel 3rd rate.
	Cedar timber on 80.00 chs.
	Good grass for grazing.
	Dense undergrowth oak bush on 80.00 chs.

Chains	
2.00	C
23.50	
31.50	
40.00	
43.00	
74.00	

Salt Lake Meridian

Chains	South on a true Re Survey line bet. secs. 25 and 30 Va. 16° 30' E.
2.00	Creek 3 lks. wide 3 ins. deep drs. S. W.
23.50	Ridge about 200 ft. high brs. S. W.
31.50	Hollow 150 ft. deep decends S. W.
40.00	No trace of cor. Set sandstone 24 × 8 × 6 ins. 18 ins. in the ground for 1/4 sec. cor. marked 1/4 on N. face, find a Cedar 5 ins. in diam brs. N. 40° W. 25 lks. dist. A cedar 12 ins. in diam brs. S. 61° E. 47 lks. dist, each marked 1/4 S. B. T.
43.00	Spur 1000 ft. above Chalk Crks. brs. S. W.
74.00	North fork of Chalk Creek 15 lks. wide 6 in. deep runs W. Side of steep mountain. Red sandstone ledges.

East boundary T. 21 S. R. 42

Chains	
80.00	Set red sandstone 20 X 12 X 6 ins. 15 ins. in the ground for cor. to secs. 25, 30, 31 and 36, marked 5 notches on N. and 1 notch on Sedges, and raised a mound of earth and stone along side. Land, mountain spurs. Soil, 3rd and 4th rate. Dense undergrowth sage and oak brush on south.
	South bet. secs. 31 and 36. Va. 16° 30' E.
10.00	Ridge decends N.
15.00	Decend through mahogany cedar and oaks.
40.00	Set red sandstone 24 X 12 X 7 ins. 18 ins. in the ground for 1/4 sec. cor. marked 1/4 on N. face, and raised a mound of earth and stone along side

Chains	
65.00	
80.00	

BOOK-A-202

Salt Lake Meridian

Chains.

64.00 Chalk Creek runs No. 60° W.
Road bs. No. W.
Ascend precipitous mountain side over red sandstone cliffs
Elevation of 50°.

80.00 The cor. to Tps. 21 and 22 S. Rs 3 and 4 W. which is a gray sandstone 24 x 12 x 6 ins. firmly set in mound of stone marked 6 notches on No. & W. edges, and raised a mound of earth and stone alongside.

Land, rough mountains.
Soil, rocky, 4th rate.
Dense undergrowth sage oak and mahogany on 80.00 chains.

Re-Survey South boundary T. 21 S. R.

Chains		Chains
	West on a true resurvey line bet. secs. 1 and 36 Va. 16°33' E.	
20.00	Ravine drs. N.	
25.00	Ridge brs. N.	
28.00	Ravine drs. N.	
40.00	Found cor. down. Re-set same which is a red sandstone 16 x 10 x 3 ins. firmly set in ground, for 1/4 sec cor. marked 1/4 on N. face and raised a mound of earth and stone alongside.	5.00
		9.00
		17.50
70.00	Ravine drs. N. 45° W.	
80.00	Set red sandstone 24 x 10 x 8 ins. 18 ins. in the ground for re-establishing cor. to secs. 1, 2, 35 and 36, marked 1 notch on E. and 5 notches on W. edges, dug pits 18 x 18 x 12 ins. N. E. S. and W. of cor. 5 1/2 ft. dist., and raised a mound of earth 2 ft. high, 4 1/2 ft. base alongside. (no trace of old cor.)	18.00
		18.50
		25.00
		40.00

Salt Lake Meridian

Chains. Land high rolling mountains
soil 2nd and 4th rate
Dense undergrowth sage, oak
and mahogany brush on 80.00 chs.

West, on a true line bet. Secs. 2
and 35

Va 16° 30' E.

5.00 Ravine about 50 ft. below ridge
brs. N.

9.00 Ravine brs. N. to chalk creek

17.50 Enter maple grove brs. N. 30° E & S.
30° W.

18.00 Robison's creek 10 lks. wide 6 ins.
deep runs N. 30° E.

18.50 Leave maple grove and enter dense
oak and sage brush

25.00 Ridge about 75 ft. above creek brs.
N. 25° W. and S. 25° E.

40.00 Ridge about 200 ft. above creek
brs. N. 25° W. and S. 25° E. on which I
set a white quartzite stone 16×12
×5 ins. 11 ins. in ground, marked

South, boundary T. 21 S. R. 4 W.

Chains. 4 on N. face and raised a mound of earth and stone along side.

40.50 Descend abruptly

48.50 Ravine drs. N. W. wood road bs. N. W. and S. E.

59.50 Ridge about 200 ft high bs. N. and S. Wood road bs. same

67.00 Ravine drs. W. W.

71.00 Road bs. W. W. and S. E.

80.00 A point on ridge about 150 fs above hollow, bs. N. and S. and 6.50 chs. East of the old cor. to secs. 2, 3, 34 and 35, established Nov. 13th 1879 by Adolph Jessen U. S. Deputy Surveyor which is a gray lime stone 16 x 10 x 6 ins firmly set in the ground and marked 2 notches on E. and 1 notches W. edges.

This connection being more than is allowed by instructions therefore at the 80. chs. I set a gray quartzite stone 14 x 12 x 10 ins 9 ins. in ground for the closing

BOOK-A-202

Salt Lake Meridian.

Chains. Corner to Secs. 2 and 35, marked 2 notches on E. and 4 notches on W. edges and C.C. on S. face. dug pits 18x18x12 ins. in each sec. 3½ ft. dist. and raised a mound of earth 2 ft. high 4½ ft. base along side

Land mountain ridges.

Soil, Clay mixed with gravel and rock 2nd & 3rd rate.

Dense undergrowth sage, and Oak brush on 80.00 chs.

April 30th 1869

For General Description

See Subdivision Notes

Shadrach M. Richardson
U. S. Deputy Surveyor

Blank

Page

BOOK-A-202

U. S. SURVEYOR GENERAL'S OFFICE,

Salt Lake City, Utah, July 21 *1885*

The foregoing field notes of the survey of the East *boundary, fractional South boundary*

Township No. 21 South *Range No.* 4 West

Executed by Shadrach M. Richardson

Under his *contract of the* 19th

day of December *1883., in the month of*

April *1884., having been critically examined, the necessary corrections and explanations made, the said field notes, and the surveys they describe are hereby approved.*

Fred Salomon

U. S. Surveyor General for Utah.

Blank

Page

BOOK-A-202

127

REPORT: 1115

Filed 188

Examined by .....

Transcribed by H R M Atkinson

Compared by Atkinson & Michaels

FIELD NOTES

OF THE SURVEY OF THE

Subdivisions of Fractional

OF

Township No. 21 South

Range No. 4 West

OF THE

SALT LAKE MERIDIAN

IN

UTAH TERRITORY,

AS SURVEYED BY

Shadrach M Richardson

U. S. Deputy Surveyor,

Under his Contract No. 123

Dated December 19th 1883

Survey commenced May 1st 1884

Survey completed May 5th 1884

BOOK A-202

Township 21 S. R. 4 W.

6	5	4	3	2	1
		176	167	158	112
7	8	175 9	166 10	157 11	141 12
		174	165	155	139
18	17	173 16	164 15	154 14	138 13
		172	163	153	137
19	20	170 21	162 22	152 23	135 24
		169	160	151	134
30	29	168 28	159 27	149 26	132 25
	145	146	147	148	131
31	32	33	34	35	129 36
				121	120

NAMES AND DUTIES OF ASSISTANTS.

	Compassman.
	Chainman.
	Chainman.
	Chainman.
	Chainman.
	Axeman.
	Axeman.
	Flagman.

Subdivisions Tp. 21 S. R. 4 W.
Salt Lake Meridian.

Preliminary to commencing this survey I run west on a blank line on the S. B'dy of sec. 36 and at 39.98 chs found the 1/4 sec. cor. and 79°98 chs. found the sec. cor. My compass will therefore run the same line, as the exterior boundaries and the chaining practically agrees.

Survey commenced May 1. 1884. with a Burts improved solar compass.

I commenced at the cor. to secs. 1. 2. 35 & 36. on the South B'dy which is a red sand stone 18x10x4 ins, firmly set in the ground with 1 notch on E. & 5 on W. edges. and pits 18x12x12 ins in each sec. 5 1/2 ft dist with mound of earth 2 ft high 4 1/2 ft base alongside. I run

North on a true resurvey line betw.

secs. 35 & 36.

Va. 16° 33' E

Subdivisions T. 21 S. R. 4

4.70 A cedar 8 ins dia.
15.50 A ravine bears N.W. & S.E.
25.00 Ridge about 150 ft high course N.W.
40.00. Set a flint stone 14x12x12 ins 8 ins in the ground marked 1/4 on W. side for 1/4 sec. cor. from which a cedar 15" dia. bears N. 10° W. 37 lks dist., marked 1/4 S.B. No other trees at hand.
Raised mound of stone along
50.10 Creek bottom bears E. & W.
54.60 Barrow road bears E. & W.
55.00. Chalk creek 25 lks across 6 ins. deep runs W.
61.00. A sandstone ledge 20 ft high
Leave creek bottom and enter cedars
71.00. Leave cedar timber bra E. &
76.00. Hill about 150 ft high bra E. & W.
80.00 Find no trace of old cor., set a brown flint stone 20x8x6 ins 15 ins in ground for reestablishing

Salt Lake Meridian.

cor. to secs. 25, 26, 35, & 36
marked with 1 notch on S. & E.
edges, dug pits 18x18x12 ins in
each sdc. 5½ ft. dist, and
raised a mound of earth
2 ft high 4½ base along order
Land, rolling mountains
Soil, 2d & 3d rate.
Dense undergrowth sage
brush on 80 chs.

East on a random line betw.
secs. 25 & 36.
Va. 16° 20' E.
alongside of mountain, through
oak brush.

40.00 Set temp. ¼ sec. cor.
80.48 Intersect E. Bdy of the Tp. at
50 lks S of cor. to secs 25. 30. 31 & 36.
established by me, thence Prun
S. 89° 39' W. on the line betw secs. 25 & 36.
with same var.
3.00 A mach drs. N.

Subdivisions T. 21 S. R. 4 W.

5.00 A wash drs N.
10.00. A wash 5 ft deep. drs. N.
20.00. A cliff of red sand stone.
40.24. Set a red sand stone 16x12x8 ins 11 ins in the ground for 1/4 sec. cor. marked 1/4 on N. face, and raised a mound of stone alongside.
70.00 A wash 15 ft deep 50 lks. across. drains W.
80.48 The cor. to secs. 25, 26, 35 & 36
Land mountainous
Soil, rocky 3d rate.
Dense undergrowth sage and oaks on 80.48 chs.

North betw. secs. 25 & 26
Va. 16° 20' E.
Over descending ground through oaks.
3.00. A ravine drs. N.W.
13.00 North fork of Chalk Creek runs N.W. 15 lks wide 6 ins deep.

Salt Lake Meridian

17.00. Cañon road to Fillmore brs. N.E. & S.W. Enter oaks.
33.00. Leave creek bottom begin to ascend ridge.
40.00. Set a grey limestone 18x12x[illegible] ins 12 ins in ground for 1/4 sec. cor. marked 1/4 on W. face, dug pits 18x18x12 ins deep, and raised a mound of earth 1 1/2 ft high 3 1/2 ft base alongside.
49.00. A wash 25 lks across dr. S.W.
2.30. A good road brs. N.E. & S.W.
67.50. Road from Cottonwood to Fillmore brs. S.W. & N.E.
69.00. Spring ditch runs W.
78.00 A ravine dr. S.W.
80.00. Set a grey sandstone 18x16x12 ins 18 ins in ground for cor. to secs 23. 24. 25 & 26., marked with 2 notches on S. & E. edges. dug pits 18x18x12 ins in each sec. 5 1/2 ft dist, and raised a mound of earth 2 ft high 4 1/2 ft base alongside.

Subdivisions T. 21 S. R. 4 W.

Land, mountainous.
Soil 2d & 3d rate.
Heavy undergrowth oak and sage on 80.00 ds.

East on a random line betw secs. 24 & 25.
Va. 16° 20' E.

40.00 Set temp. 1/4 sec. cor.
80.70 Intersect E. b'dy of the Tp. 60. lks S. of cor. to secs 19. 24. 25 & 30., reestablished by me thence I run
S. 89° 34' W. on a true line betw secs. 24 & with same var.
5.00. Spur of mountain about 300 ft. hig bg. S.W. & N.E.
10.70 Enter maple grove.
17.10. Spring branch 2 lks across runs S.W. Leave maple grove
40.35. Set a red sandstone 16 x 12 x 6 ins 11 ins in the ground for 1/4 sec cor., marked 1/4 on N. face

and raised a mound of stone alongside.
Pits impracticable.
1/4.20 Hiram creek. 3 lks wide 3 ins deep. runs S.W.
60.50 Ridge about 200 ft high bears N. & S.
60.60 Road bears N. & S.
80.70 The cor. to secs. 23. 24. 25 & 26.
Land, mountain spurs.
Soil, gravel clay & rocky 3d rate.
Timber on 6.40 chs.
Dense undergrowth sage and oaks on 80.70 chs.

North betw secs. 23 & 24.
Va. 16° 30' E

over rolling ground ascends through sage & rubby cedars.
7.50 A ravine drs S.W.
18.30 Ridge about 100 ft high above spring brs N. E. & S.W., commence descending.

Subdivisions T. 21 S. R 4 W.

23.50. A ravine drs W.
35.50 Road to Fillmore brs E & W.
40.00. Set a gray quartzite stone 24x12x
12 ins in mound of stone for
1/4 sec. cor., marked 1/4 on W.
face, and raised a mound
of stone alongside.
Pits impracticable.
44.70 A ravine in hollow drs W.
56.50 Commence ascending.
70.00. Ridge about 50 ft high brs
E & W.
80.00 Set a grey granite stone 18x18
x12 ins 12 ins in the ground
for cor. to secs 13. 14. 23 & 24,
marked with 3 notches on S.
and 1 on E. edges, and raised
a mound of stone alongside
Pits impracticable.
Land, rolling & hilly.
Soil, rocky & gravelly and
mixed with clay 2d & 3d rate
Dense undergrowth sage, oaks
and cedars on 80.00 chs.

Salt Lake Meridian.

East on a random line betw secs 13 & 24.
Va. 16° 20' E
Over broken land, through sage and oak.

40.00 Set temp. 1/4 sec. cor.

80.60 Intersect East B'dy of Tp. 80 lks S. of cor. to secs 13. 18. 19 & 24., reestablished by me, thence
S. 89° 26' W. on a true line betw. secs. 13 & 24.
with same var.

20.50 Road from Fillmore to lime kiln bes. S E & N W.

40.30 Set quartzite stone 16 x 12 x 6 ins 11 ins in the ground for 1/4 sec. cor. marked 1/4 on N. face, dug pits 18 x 18 x 12 ins N. & S. of stone 5 1/2 ft dist, and raised a mound of earth 1 1/2 ft high, 3 1/2 ft base alongside.

80.60. The cor. to secs. 13. 14. 23 & 24.
Land, gently ascending E.

Soil, clay & gravel 2d. rate
Dense undergrowth sage
and oak brush on 80.00 chs.

North betw secs. 13 & 14.
Va. 16° 00' E.

40.00 Set grey quartzite stone 18x20x10 ins
12 ins in the ground for 1/4 sec. cor
marked 1/4 on W. face and raised
a mound of stone alongside
55.00. Ridge bes N.W. & S.E. from which
the N.W. cor. of field bes. N. 79° E.
about 20.00 chs dist and the S.W.
cor. bes. N. 86° E about 20.00 chs dist
78.00. Road bes N.W. & S.E.
80.00 No trace of old cor., set grey
sandstone 18x12x6 ins, 12 ins in
the ground for cor. to secs. 11. 12.
13 & 14., marked 4 notches on S.
and 1. on E. edges, and raised
a mound of earth and stone
alongside.
Land, rolling.
Soil, gravel & clay 2d rate

Salt Lake Meridian.

Dense undergrowth oak and sage on 80.00 chs.

East on a random line betw. secs. 12 & 13.
Va. 16° 00' E.

40.00 Set temp. 1/4 sec. cor.

80.35. Intersect E. b'dy of Tp. 45 lks S. of cor. to secs. 7. 12. 13 & 18 reestablished by me.
thence
S. 89° 41' W. on true line betw. secs. 12 & 13.
with same var.

18.00. Touch branch of North cañon creek 3 lks wide runs N.W.

40.17. Set sandstone 16x12x8 ins 11 ins in ground for 1/4 sec. cor. marked 1/4 on N. face, dug pits 18x18x12 ins N. & S. of stone 5 1/2 ft dist, and raised a mound of earth 1 1/2 ft

high 3½ ft base alongside
48.40 Cedar 3 ins diam.
51.00 Hollow 50 lks wide 10 ft
deep. dis. N W.
71.00 Ridge 50 ft high bis N W
and S E.
80.35 The cor. to secs. 11. 12.
13 & 14.
Land, rolling bench.
Soil, clay sand gravel
2d & 3d rate.
Timber, cedar.
Dense undergrowth
scrubby oak and
sage brush on
80.00 chs.

Chains	
1.50	Re
7.50	Wo
8.50	Sp
18.00	Nor run
23.80	So
24.00	Gree
40.00	Fou -ston 11 in mas a m alon
80.00	Fou -sto grou mar note 18 × and 2 ft Lan Soil

Salt Lake Meridian

Chains	
	North on true resurvey line bet. secs. 11 and 12. Va 16°00' E.
1.50	Ridge 30 ft. high brs. N.W. and S.E.
7.50	Wood road brs. N.W. and S.E.
8.50	Spur of ridge brs. N.W. and S.E.
18.00	North Cañon creek 3 lks. wide runs. S.W.
23.80	Road brs. E and W.
24.00	Creek 3 lks. wide runs. W
40.00	Found the ¼ sec. cor. down a sand-stone 16×8×7 ins. Reset the same 11 ins. in the ground for reestablished ¼ sec. cor. marked ¼ on W. face and raised a mound of earth and stone alongside.
80.00	Found no trace of cor. Set sand-stone 18×14×9 ins. 12 ins. in the ground for reestablished corner cor. to secs. 1, 2, 11 and 12 marked 5 notches on S. and 1 notch on E. edges; dug pits 18×18×12 ins. in each sec. 5½ ft. dist and raised a mound of earth 2 ft. high 4½ ft. base alongside
	Land rolling
	Soil gravel and clay 2d rate.

14 Subdivision T. 27 S. R. 4 W.

Chains	
	Dense undergrowth oak and sage on 80 chs.
	East on a random line bet. Secs. 1 and 12. Va. 16° 25' E
40.00	Set a temporary 1/4 Sec cor.
80.40	Intersect E. boundary of township 28 lks. N. of the cor. to Secs. 1, 12, 6 and 7 reestablished by me. Thence N. 89° 48' West on a true line between Secs. 1 and 12 with Sam.
40.00	This cor. can not be found Set a granite stone 18 x 10 x 8 ins. 12 ins in ground for se=Established 1/4 Sec. cor. marked 1/4 on N. face and raised a mound of earth along side
43.00	Rocky ridge bro. N. and S
43.00	Foot of ridge about 40 ft bro. N. W. and S. E.

Salt Lake Meridian

51.00 Wood road brs N.W. & S.E.
53.50 Hollow draws N.W.
60.00 Ridge about 100 ft high brs. S. 60° and N. 60° W.
80.40 The cor. to secs. 1. 2. 11 & 12.
Land, rolling.
Soil, 2d rate.
Scattering cedar timber.
Dense undergrowth sage and oak brush on 80.40 chs

Note. As the distances very nearly agree on the last mile with original survey, I discontinue this line at this point.
May 1st 1884.

From the reestablished cor. to secs. 25, 26, 35 and 36, I run West on a blank line between secs. 26 & 35. The variation of my compass being 16° 20' E and at 40.00 chs found no trace of 1/4 sec. cor., and at

80.00 chs. the sec. cor. was down and of place I therefore continued the true line West 4 miles and 1 chain to the cor. of secs. 29, 30, 31, & 32, which I found standing and due West of the starting corner and the distance practically agrees with old survey.

As there were no permanent or reliable corners on this line to extend the subdivisions from, I deemed it necessary and resurveyed the same (after correcting my chain to agree with original measurements) as follows, to wit:

Beginning at the cor. to secs. 29. 30. 31. & 32 which is a red sandstone 16x10x5 ins. firmly set in the ground, marked 1, notch on S. and 5 notches on

Chains
13.00
22.90
31.30
37.50
40.00
55.90
80.00

BOOK-A-202

Salt Lake Meridian.

Chains East, Edges, and to perpetuate same raised a mound of earth and stone alongside

Thence

East on a true re-survey line bet. Secs. 29 and 32

Va. 16° 20' E.

15.00 Road brs. N.W. and S.E.

22.90 Dry bed of creek drs. N.W.

31.50 Road brs. N. and S.

37.50 Dry bed of creek drs. N.W.

40.00 Set a red sand stone 16 X 7 X 5 ins. 11 ins. in ground for the re-established Cor. marked ¼ on N. face and raised a mound of earth and stone alongside.

55.90 Road brs. N.W. and S.E.

80.00 Set a red sand stone 18 X 12 X 4 ins. 12 ins. in ground, for the re-established Cor. to Secs. 28, 29 32 and 33, marked with 1 notch on the S. and 4 notches on the East Edges and raised a mound of earth and stone alongside

Subdivision T. 21 S. R. 4 W.

Chains Land rolling
Soil, 2nd rate
Dense undergrowth sage
brush on 80.00 chs.

East on a true re-survey
line bet. Secs. 28 and 33.
Va 16° 25' E.

15.75 Road bs N. E and S. W.

40.00 Set a sand stone 16 x 8 x 5 ins.
11 ins. in ground for re-established 1/4 Sec. Cor. marked 1/4 on N. face and raised a mound of earth and stone along side

55.75 Dry bed of creek 8 lks wide ds N.

80.00 Set a quartzite stone 20 x 7 x 6 ins.
15 ins. in ground for re-established Cor. to Secs. 27, 28, 33 and 34, marked 1 notch on S. and 3 notches on E. edges, and raised a mound of Earth and stone along side
Land rolling

Sall

Chains Soil
Den
brus

East
and

12.00 Rid
17.00 Rav
19.00 Roa
26.50 Rav
33.50 Rid
39.00 Roa
39.50 Rav
40.00 Set
11 ins.
marke
a mo
alon
45.00 Rid
62.50 Rab
64.50 Rid
66.25 Rav
71.00 Rid

Salt Lake Meridian.

Chains Soil 2nd and 3rd rate
Dense undergrowth sage brush and scrub Oak on 80.00 chs.

East, on a true resurvey line bet. Secs. 27 and 34

Va. 16° 20' E.

12.00 Ridge brs. N. W. and S. E.
17.00 Ravine 15 lk. wide drs. N. W.
19.00 Road brs. N. W. and S. E.
26.50 Ravine drs N.
33.50 Ridge about 50 ft above ravine brs N & S.
39.00 Road brs. N. and S.
39.50 Ravine drs. N.
40.00 Set a quartzite stone 16 X 8 X 6 ins. 11 ins. in ground for re established 1/4 Sec. Cor. marked 1/4 on N. face, and raised a mound of earth and stone along side
45.00 Ridge brs. N. and S.
62.50 Ravine drs. N.
64.50 Ridge brs. N. and S.
66.25 Ravine drs. N.
71.00 Ridge brs. N. and S.

Subdivision T. 2 S. R. 4 W.

Chains.

80.00 Set a quartzite stone 14X10X8 ins. 8 ins. in ground, for reestablished cor. to Secs. 26, 27, 34 and 35 marked 1 notch on the S. and 2 notches on E. edges, and raised a mound of earth and stone along side

Land rolling and rotten soil 2nd and 3rd rate

Dense undergrowth scrub oak and sage brush on 80

East, on a true resurvey line, bet. Secs. bet. Secs 26 and 35

Va 16° 20' E.

5.50 Ravine drs N.

9.70 Canon road brs. N. and S.

28.50 " " S 65° E and N 60°

30.50 Chalk Cr. 30 lks. wd 12 ins. deep rapid current rocky bottom mns N.W.

40.00 ~~Set~~ Cor. down reset same a red sand stone, 15X12X8 ins. 10 ins. in ground, for

Salt Lake Meridian

Chains. re-established 1/4 Sec. Cor. marked
1/4 on N. face ~~fd~~ raised a
mound of earth and stone
along side
46.50 Cañon, road brs. N. W. and S. E.
48.50 Branch Chalk Cr. 20 lks. wide
runs S. 20° W.
80.00 The cor. to Secs. 25, 26, 35 and 36
Land rolling ~~soil~~,
soil 2nd rate
Dense undergrowth Oak, Sage
brush and willows on 80 00 chs

From re-established cor to Secs. 26, 27, 34 & 35 Thence
North, bet. Secs. 26 and 27
Va 16° 20' E.
9.50 Bluff about 60 ft above Cr. descend
10.50 Foot of same and across creek bottom
25.00 Chalk Cr. 30 lks. wide 2 ft deep runs N. W.
26.50 Road brs. N. W. and S. E.
27.50 Top of ridge leave cr. bottom
and descend
35.50 Road brs. N. E and S. W.
40.00 Set a gray sand stone 18 X 12 X
6 ins., 12 ins. in ground for

Subdivision T. 21 S. R 4 W.

Chains for 1/4 Sec. Cor. and raised a mound of Earth and Stone along side

50.00 Ridge about 300 ft. above Chalk Cr. brs. N. E and S. W.

73.00 Wood Road brs. N. E and S. W

80.00 Set a blue lime stone, 18X12X6 ins., 12 ins. in the ground for Cor. to Secs. 22, 23, 26 and 27. marked with 2 notches on the S. and E. edges, dug pits 18X18X12 in, in each sec. 5½ ft. dist. and raised a mound of earth 2 ft. high 4½ ft. bas. along side.

Land high and rolling. soil 2nd rate.

Dense undergrowth page Oak, brush and willows, on 80.00 Chs.

BOOK-A-202

Salt Lake Meridian 23

Chains East on a random line
bet secs. 23 and 26
Va. 15° 20' E

40.00 Set temporary ¼ sec. cor.

80.40 Intersected N. and S. line 20 lks.
N. of the corner to secs. 23.24.25
and 26 Run.
N. 89° 51' W. on a true line bet
secs. 23 and 26. with same Va.

11.00 Ravine drs. S. W.

15.00 Ridge bears N. E. and S. W.

26.50 Ravine 100 lks across. drs. S. W.

32.50 Road to Fillmore brs. S. W. and N. E.

40.20 Set a sandstone 16×12×8 ins. 11 ins
in the ground for ¼ sec cor. marked
¼ on N. face: dug pits 18×18×12 ins
N. and S. of stone 5½ ft dist. and
raised a mound of earth 1½ ft
high 3½ ft. base alongside.

44.00 Wash 50 lks. across 10 ft deep drs. S. W.

49.00 Wash 75 lks across. 6 ft deep drs.
S. W.

51.00 Wash 50 lks across 4 ft deep. drs. S. E.

68.50 Ravine drs. S. E.

75.00 Ridge 150 ft. high. brs S E and N. W.

24 Subdivision T. 21 S. R. 4 E.

Chains

80.40 The cor. to secs. 22. 23. 26 and 27.
Land rolling.
Soil loam gravel and clay 1st and 2d rate.
Dense undergrowth oak and sage brush on 80.40 chs.

North bet. secs. 22 and 23.
Va 16° 00' E.

20.00 Ravine drs. W.
30.00 Ridge brs. N.W. and S.E.
40.00 Set a grey limestone 14×12×6 ins. 9 ins. in the ground for ¼ sec. cor. marked ¼ on W. face and raised a mound of stone alongside.
Pits impracticable.
40.10 Road brs. E and W.
54.50 Ravine drs. W.
58.00 Road brs. E and W.
63.50 Ravine drs. N. W.
66.00 Ravine drs. N. W.
67.00 Road brs. N.W. and S.E.
72.40 Road to Fillmore brs. E and W.

Salt

Chains

80.00 Set g
18 ins.
14.15.
S. and
raised
stone
Lava
Soil
Dense
on 80

East
14 and

40.00 Set le
80.80 Inter
of the

N. 89°
14 and
86.50 Road
Kiln b

BOOK-A-202

chains

80.00 Set quartzite stone 24×16×12 ins. 18 ins. in the ground for cor. to secs. 14. 15. 22 and 23. marked 3 notches on S. and 2 notches on E. edges. and raised a mound of earth and stone alongside.

Land rolling.

Soil 2d rate.

Dense undergrowth. sage brush on 80 chs.

East on a random line bet. secs. 14 and 23.

Va. 16° 00' E.

40.00 Set temporary ¼ sec. cor.

80.80 Intersect N and S. line 75 lks N. of the cor. to secs. 13. 14. 23. and 24

Thence

N 89° 28' W. on a true line bet. secs. 14 and 23 with same va.

86.50 Road from Fillmore to lime kiln brs. N.E. and S.W.

26 Subdivision T. 21 S. R. 4 W.

Chains

40.40 Set quartzite stone 16×10×8 ins 11 ins in the ground for ¼ sec. cor. marked ¼ on N. face and raised a mound of earth and stone alongside.

48.00 Road brs. N and S.

51.50 Ridge brs. S.W. and N.E.

56.00 Ravine drs. S.W.

62.00 Ridge 200 ft high brs. S.W. and N.E.

63.00 Enter scattering timber

80.80 The cor. to secs. 14.15.22 and 23.

Land rolling

Soil clay, gravel and rocky 2d and 3rd rate

Timber on 17.80 chs

Dense undergrowth oak & sagebrush on 80.80 chs

May 2nd 1884

North bet. Secs 14 and 15

Va 16°00' E

15.00 Ridge bears E and W

30.00 Road bears N.W. and S.E.

35.00 Wash drs. N.W.

38.50 Ravine drs. N.W.

40.00 Set blue limestone 18×16×12 ins.

BOOK-A-202

Salt Lake Meridian

chains 12 ins. in the ground for ¼ sec. cor. marked ¼ on W. face and raised a mound of earth and stone alongside.

50.00 Ridge brs. E. and W.

63.75 Road brs. N. W. and S. E.

64.00 Ravine brs. N. W.

70.00 Ridge brs. E. and W.

80.00 Set quartzite stone 16×10×3 ins. 11 ins in the ground for cor. to secs. 10. 11. 14 and 15. marked 4 notches on S. and 2 notches on E. edges and raised a mound of earth and stone alongside.

Land broken.

Soil, clay and gravel 3d rate

Dense undergrowth, sage and oak brush on 80 chs.

East on a random line bet. Secs. 11 and 14

Va. 16°20' E

40.00 Set temporary ¼ sec. cor.

80.38 Intersect N. and S. line 40 lks.

28 Subdivision T. 21 S. R. 4 E.

Chains S. of cor. to secs. 11. 12. 13 and 14.

Thence

S. 89° 43' W. on a true line bet secs. 11 and 14 with same Va.

6.00 Road brs. N. W. and S. E.

6.20 North Canon creek runs N. W.

27.20 Road brs N. W. and S. E.

29.50 Ridge brs N and S. E.

40.19 Set grey limestone 16×12×8 ins. 12 ins. in the ground for ¼ sec. cor. marked ¼ on N. face dug pits 18×18×12 ins. N and S. of stone 5½ ft dist. and raised a mound of earth 1½ ft. high 3½ ft. base alongside

40.70 Road brs. N. W. and S. E.

45.00 Ravine drs. N. W.

75.00 Ridge 150 ft. high brs N and S.

80.38 The cor. to secs. 10. 11. 14 and 15

Land hilly

Soil. clay and gravel 2d rate

Undergrowth sage and oaks on 80 chs.

BOOK-A-202

Salt Lake Meridian 29

Chains North bet. secs. 10 and 11.
Va. 16° 15' E.

5.50 Road brs. E and W.

7.50 Ridge 200 ft. high brs. N.W. & S.E.

25.00 Creek bottom

27.50 North Canon creek (3 chs wide) runs N.W.

40.00 Set white quartzite stone 14×10×8 ins. 9 ins. in the ground for ¼ sec. cor. marked ¼ on W. face: dug pits 18×18×12 ins E and W. of stone 5½ ft dist and raised a mound of earth 1½ ft. high 3½ ft. base alongside.

40.15 Road brs. N.W. and S.E.

80.00 Found the stone down which is a grey quartzite 16×10×6 ins. reset the same 11 ins. in the ground for cor. to secs. 2.3.10 and 11. dug pits 18×18×12 ins. in each sec. 5½ ft. dist and raised a mound of earth 2 ft. high 4½ ft base alongside
Land rolling and hilly
Soil gravel and clay 2d rate
Undergrowth Oak, and
Dense sage on 80. chs.

30 Subdivision T. 21 S. R. 4

chains East on a random line bet
Secs. 2 and 11.
Va. 16° 15' E.

40.00 Set temporary ¼ sec. cor.

80.80 Intersect N and S. line 30 lks. N. of the cor. to secs. 1. 2. 11. and 12.

Thence

N 89° 43' W. on a true line bet
Secs. 2 and 11. with same va.

40.40 Set sandstone 16×10×8 ins. 11 ins. in the ground for ¼ sec. cor. marked ¼ on N. face, and raised a mound of earth and stone alongside.

64.00 Leave cedars. Enter thick sage.

80.80 The cor to secs. 2, 3, 10 and 11

Land rolling.

Soil clay and gravel 2d and 3d rate

Timber cedar on 64 chains.

Undergrowth Sage ~~age~~ brush on 80.80 chs.

Salt Lake Meridian.

chains From the cor. to secs. 27. 28. 33 and 34. which is a quartzite stone 20 × 7 × 6 ins set firmly in the ground and marked 1 notch on S. and 3 notches on E. edges, with mound of earth and stone alongside I run.

North bet secs. 27 and 28.
Va 16° 35' E.

5.00 Ridge brs. N.W. and S.E.
13.40 Ravine drs. N.W.
18.35 Road brs. N.W. and S.E.
34.90 Ravine drs N.W.
40.00 set red sandstone 17 × 8 × 5 ins 12. ins in the ground for ¼ sec cor. marked ¼ on W. face and raised a mound of earth and stone alongside.
48.00 Bench brs N.W. and S.E.
58.20 Roads brs. E and W.
60.00 Chalk creek bottom covered with willows
House brs. N 85° E 18.00 chs. dist, Enter cultivated field
63.00 Leave field brs. N 65° E and S 65° W.
71.70 South Fork of Chalk creek runs N.W.

Subdivision T. 38 S. R. 7 W.

Chains

72.30 Chalk creek 75 lks. wide 8 in deep runs N. W.

74.00 Leave creek bottom and willows.

80.00 set white sandstone 22×16×12 ins. 16 ins in the ground for cor. to secs. 21. 22. 27 and 28 marked 2 notches on S and 3 notches on E. edgis and raised a mound of earth and stone alongside.

Land rolling

Soil 1st half mile 1st rate 2d half mile 3d rate. Dense undergrowth Sage brush scrub oak and willows on 77.00 chs.

East on a random line bet secs 22 and 27

Va 16° 35' E.

40.00 set temporary ¼ sec cor

79.80 Intersect N and S. line 30 lks. S. of cor. to secs. 22. 23. 26 and 27

Thence

S. 89° 47' W. on a true line bet secs. 22

BOOK-A-202

Salt Lake Meridian 34

Chains	
	and 27 with same va.
4.00	Ravine drs. N.W.
8.00	Hill brs. N.W. and S.E.
25.00	Hollow drs. N.W.
29.40	Road brs. S.W. and N.E.
31.00	Ridge brs. N.W. and S.E.
39.70	Hollow drs. N.W.
39.90	Set flint stone 14×12×6 ins. 9 ins. in the ground for 1/4 sec. cor. maked 1/4 on N. face and raised a mound of earth and stone alongside
40.10	Road brs. S.E. and N.W.
44.00	Bench brs. N.W. and S.E.
79.80	The cor. to Secs 21, 22, 27 and 28.
	Land hilly on 44 chs. bench on 35.80 chs.
	Soil 2d rate
	Undergrowth sage, oak and cedar on 79.80 chs.

35 Subdivision T 21 S R 4 W

Chains	North bet. secs. 21 and 22. Va. 16° 00' E
12.25	Road brs. E and W.
15.00	Hollow drs. W.
22.00	Ridge brs. N.W. and S.E.
32.00	Wash drs. S.W.
37.00	Ridge brs. N.W. and S.E.
40.00	Set grey lime stone 16×10×8 ins. 11 ins in the ground for ¼ sec. cor. marked ¼ on W. face; dug pits 18×18×12 ins. E and W. of stone 5½ ft dist and raised a mound of earth 1½ ft high. 3½ ft base. alongside
51.00	Road brs. E and W.
80.00	Set grey quartzite stone 14×8×8 ins. 9 ins. in the ground for cor. to secs 15.16.21 and 22. marked 3 notches on S and 3 notches on E. edges dug pits 18×18×12 ins. in each sec. 5½ ft dist. and raised a mound of earth 2 ft high 4½ ft base alongside.
	Land rolling.
	Soil gravel and clay
	Undergrowth sage on 80 chs.

BOOK-A-202

Salt Lake Meridian 36

Chains. East on a random line bet. secs. 15 and 22.

Va 16° 00' E

40.00 Set temporary ¼ sec. cor.

80.50 Intersect N and S. line 10 lks. N. of cor. to secs. 14. 15. 22 and 23.

Thence

N 89° 56' W. on a true line bet secs. 15 and 22 with same Va.

40.25 Set grey flint stone 14×12×5 ins. 10 ins in the ground for ¼ sec. cor. marked ¼ on N. face and raised a mound of earth and stone alongside.

47.50 Road brs. SW. and NE.

80.50 The cor. to secs. 15. 16. 21 and 22.

Land rolling

Soil clay and gravel 2d rate

Undergrowth sage on 80.50 chs.

May 3d 1884

Subdivision T. 21 S. R. 4 W.

Chains	
	North bet secs. 15 and 16 Va 16°00' E
18.25	Wash 25 lks. wide 3 ft deep drs. N.W.
23.00	Wash 50 lks wide 5 ft deep drs. N.W.
40.00	Set grey limestone 24×16×6 ins 18. ins. in the ground for ¼ sec. cor. marked ¼ on W. face; dug pits 18×18×12 ins. E and W of stone 5½ ft. dist. and raised a mound of earth 1½ ft high 3½ ft base alongside.
51.00	Road brs. E and W.
74.00	Ridge 75 ft high brs. E and W.
79.80	Hollow drs. N.W.
80.00	Set grey quartzite stone 18×12×6 ins. 12 ins. in the ground for cor. to secs. 9. 10. 15 and 16, marked 4 notches on S. and 3 notches on E. edges; dug pits 18×18×12 ins. in each sec. 5½ ft dist. and raised a mound of earth 2 ft. high 4½ ft. base alongside.
	Land rolling
	Soil. gravel and clay 2d rate
	Dense undergrowth sage on

BOOK-A-202

Salt Lake Meridian 38

Chains 80 chs.

East on a random line bet.
secs. 10 and 15.
Va 16°00' E

40.00 Set temporary ¼ sec. cor.
79.70 Intersect N and S. line 68 lks.
N. of the cor. to secs. 10. 12. 14 and 15.
Thence.
N 89°31' W. on a true line bet.
secs. 10 and 15 with same Va.
29.00 Ridge brs. N.W. and S.E.
39.85 Set quartzite stone 16×12×8 ins.
11 ins in the ground for ¼ sec cor.
marked ¼ on N. face; dug pits
18×18×12 ins. N and S. of cor. 5½ ft dist
and raised a mound of earth
1½ ft high 3½ ft. base alongside.
42.00 Road brs. N.E. and S.W.
55.00 Hollow drs. N.W.
65.00 Hill 50 ft high.
79.70 The cor to secs. 9. 10. 15 and 16
Land broken
Soil gravel and clay 2d rate

Subdivision T. 21 S. R. 4 W.

Chains	
	Dense underygrowth sage and oak brush on 79. Jocho
	North bet. Secs. 9 and 10 Va 16° 15' E
40.00	Set quartzite stone 16×8×4 ins. 11 ins in the ground for ¼ sec. cor, marked ¼ on W. face; dug pits 18×18×12 ins. E and W. of stone 5½ ft. dist and raised a mound of earth 1½ ft. high 3½ ft base alongside.
45.00	Road from Fillmore to North canon brs. N. E. & S. W.
59.00	North canon creek 4 chs. wide runs W.
80.00	Found the cor. down, which is a quartzite stone 16×8×5 ins. Reset same 11 ins in the ground for cor. to secs. 3. 4. 9 and 10. marked 5 notches on S. and 3 notches on E. edges, and raised a mound of earth and stone alongside.

Chains	
40.00	Se
80.25	E
	of
	O
6.00	Se
15.00	T
40.12	a
	in
	×
	g
	1/4
	m
	a
80.25	c

BOOK-A-202

Salt Lake Meridian 40

chains Land rolling
Soil 2d rate
Undergrowth, sage and greasewood on 80 chs.

East on a random line bet. Secs. 3 and 10.
Va. 16°00'E

40.00 Set temporary ¼ sec cor.
80.25 Intersect N and S. line 15 lks. N. of cor. to secs. 2. 3. 10. and 11.

Thence
N 89°54' W. on a true line bet Secs. 3 and 10 with same Va.

6.00 Road brs. N and S.
15.00 Spur of ridge brs. N and S.
40.12 Found ¼ sec. cor. out of place which is a quartzite stone 16×9×6 ins. Reset same 11 ins. in the ground for ¼ sec cor. marked ¼ on N. face and raised a mound of earth and stone alongside.
80.25 The cor to secs. 3. 4. 9 and 10.

41 Subdivision T. 21. S. R. 7 W.

Chains Land hilly.
Soil clay and gravel 2d rate
Undergrowth Sage and grease
-wood on 80.25 chs.

From reestablished cor. to secs.
28. 29. 32 and 33. which is a red
sandstone 16×12×8 ins. firmly set in
the ground and marked 1 notch
on S. and 4 notches on E. edges, and
mound of earth and stone along
-side

North bet secs. 28 and 29.
Va 16° 30' E

40.00 Found the ¼ sec. cor. down, which
is a sandstone 20×12×6 ins. Reset
same 15 ins. in the ground marked
¼ on W. face dug pits 18×18×12 ins.
E and W. of Stone 5½ ft dist and
raised a mound of earth 1½ ft
high 3½ ft base alongside.

80.00 The stone being gone I set a red
sandstone 16×12×12 ins. 11 ins in the
ground for cor. to secs. 20. 21. 28.

BOOK-A-202

Salt Lake Meridian

Chains and 29. marked 2 notches on the S. and 4 notches on E. edges, and raised a mound of earth and stone along side

Land gently rolling.

Soil 2d rate

Undergrowth Dense sage on 80 chs

East on a random line bet. Secs. 21 and 28.

Va. 16° 35' E.

40.00 Set temporary ¼ sec. cor.

80.02 Intersect N and S. line 4 lks. N. of the cor. to secs. 21. 22. 27 and 28.

Thence

N 89° 58' W. on a true line bet. Secs 21 and 28 with same va.

40.01 Set red sand stone 18×12×6 ins. 12 ins in the ground for ¼ sec. cor. marked ¼ on N. face and raised a mound of earth and stone alongside

45.00 Ridge brs. N and S.

51.30 Road brs. N and S.

43 Subdivision T. 21 S. R. 7 E.

chains

58.50 Chalk creek 40 lks. wide 5 ins. deep runs N. W.

59.00 Orchard fence brs. N. W. and S. E.

61.33. House brs. S 55° W. 2 chs. dist.

65.00 Orchard fence brs. N W and S. E.

66.70 Mill race runs N. W.

80.02 The cor. to secs. 20. 21. 28 and 29.

Land level and rolling.

Soil on cre.k bottom sandy loam. 1st rate. On bench clay and gravel 2d rate

Undergrowth sage on 71 chs.

North bet secs. 20 and 21
Va. 16° 35' E

.60 Orchard fence brs. E and W

1.30 Creek 10 lks. wide runs W.

6.00 Stone wall brs. E and W.

7.30 Mill race 15 lks wide runs N. W.

7.70 Chalk creek 35 lks wide 9 ins. deep runs N. W.

15.80 Creek 5 lks. wide runs N. W.

BOOK-A-202

Salt Lake Meridian 44

Chains

17.20 Road brs. N.W. and S.E. Leave creek bottom

20.00 Ridge brs N.W and S.E. Enter sage

25.40 Ravine and road brs. N.W and S.E.

30.00 Ridge brs. N.W and S.E.

31.75 Road brs. N.W and S.E.

40.00 Set white sand stone 16×12×6 ins. 11 ins. in the ground for ¼ sec. cor. marked ¼ on W. face, and raised a mound of earth and stone alongside

57.50 Road brs. N.E and S.W.

80.00 The cor. stone being down I reset it which is a quartzite stone 15×13×12 ins. marked 3 notches on S and 4 notches on E. edges. Raised a mound of earth and stone alongside.

Land rolling

Soil on 20 chs 1st rate 60 chs. 2d rate

Undergrowth Sage on 60 chs.

445 Subdivision T. 21 S. R. 10 W.

Chains East on a random line bet
Secs. bet 16 and 21.
Va 16° 35' E.

40.00 Set temporary ¼ sec cor.

79.80 Intersect N. and S. line 18 lks. N. of the cor. to secs 15.16.21 and 22.

Thence

N 89° 52' W. on a true line bet. secs. 16 and 21 with same Va.

39.90 Reset ¼ sec cor which I found out of place which is a white sand-stone 18×9×5 ins. marked ¼ on N. face, dug pits 18×18×12 ins. N. and S. of stone 5½ ft dist and raised a mound of earth 1½ ft high 3½ ft base alongside

44.25 Ravine drs. N. W.

55.00 Ridge brs. N W and S. E.

59.00 Road brs. N E and S W

79.80 The cor. to secs 15.16.21 and 22.

Land rolling

Soil clay and gravel 2d rate

Undergrowth sage on 79.80 chs.

Sa

Chains N

.30 Roa

8.00 Roa

34.50 Roa

35.00 Roa

40.00 Fin
stor
grou
W.
earth

55.25 Roa

80.00 Rese
is a
mai
dug
ft d
2 ft
Lan
Soil
Une

Salt Lake Meridian 76

Brains North bet secs. 16 and 17.
Va. 16° 35' E.

.30 Road brs. E and W.
8.00 Road brs. E and W
34.50 Roads fork
35.00 Road brs. S.W. and N.E.
40.00 Finding no corner I set quartzite stone 22×12×10 ins. 16 ins. in the ground for ¼ Sec. cor. marked ¼. on W. face and raised a mound of earth and stone alongside.
55.25 Road brs. N E and S. W.
80.00 Reset cor. to secs. 8. 9. 16 and 17 which is a quartzite stone 28×6×5 ins. marked 4 notches on S and E. edges: dug pits 18×18×12 ins. in each sec. 5½ ft dist and raised a mound of earth 2 ft high 4½ ft base alongside.
Land rolling.
Soil clay and gravel 2d rate
Undergrowth sage brush on 80 chs.

Subdivision T. 21 S. R. 4 E.

chains East on a random line bet. Secs. 9 and 16.

Va 16° 35' E.

40.00 Set temporary ¼ sec cor.

79.90 Intersect N and S. line 15 lks. N. of cor. to secs. 9.10.15 and 16

Thence

N 89° 54' W. on a true line bet secs 9 and 16 with same Va.

39.95 Found no trace of cor. Set a quartzite stone 18×7×6 ins. 12 ins. in the ground for ¼ Sec. cor. marked ¼ on N. face dug pits 18×18×12 ins. N and S. of stone 5½ ft dist and raised a mound of earth 1½ ft high 3½ ft base alongside

54.00 Road brs. N.E. and S.W.

59.25 Road brs. N.E. and S.W.

72.00 Ridge brs. N and S.

79.90 The cor. to secs. 8.9.16 and 17

Land rolling.

Soil gravel and clay 2d and 3d rate

Undergrowth sage and greasewood

on 79.90 chs.

Salt Lake Meridian 48

chains North bet secs. 8 and 9
Va. 16° 35' E.

15.00 Road brs. N.E. and S.W.

25.50 Telegraph line brs. N.E. and S.W.

40.00 No trace of cor. Set a quartzite stone 16×8×5 ins. 11 ins. in the ground for ¼ sec cor. marked ¼ on W. face. and raised a mound of earth and stone alongside.

42.00 Ravine drs. W.

52.00 Old road brs. N.E. and S.W.

63.50 Foot of ridge brs. N.W. and S.E.

67.50 Ridge brs. N.W. and S.E.

80.00 Found no trace of the cor. Set quartzite stone 16×9×6 ins. 11. ins in the ground for cor. to secs. 4. 5. 8 and 9 marked 5 notches on S. and 4 notches on E. edges; dug pits 18×18×12 ins. in each sec. 5½ ft dist. and raised a mound of earth 2 ft. high 4½ ft. base. alongside.

Land 1st 40 chs level. 2d 40 chs. broken

Soil. clay and gravel 2d rate.

Undergrowth Sage on 80 chs.

48 Subdivision T. 21 S. R. 7 W.

chains East on a random line bet chains
Secs. 4 and 9
Va 16° 35' E

40.00 Set temporary ¼ sec. cor.

80.00 Intersect N and S. line 28 lks N. of the cor. to secs. 3. 4. 9 and 10.

Thence

N 89° 48' W. on a true line bet secs. 4 and 9 with same Va.

34.50 Road brs. N and S.

40.00 Set quartzite stone 16×8×5 ins. 11 ins. in the ground for ¼ sec. cor. marked ¼ on N. face; dug pits 18×18×12 ins. N and S. of stone 5½ ft dist; and raised a mound of earth 1½ ft high 3½ ft base along side

53.25 Road brs. N. E. and S. W.

56.50 Telegraph line brs N E and S. W.

62.20 Road brs. N and S.

80.00 The cor. to Secs. 4. 5. 8 and 9.

Land rolling.

Soil clay and gravel 2d rate

Undergrowth Sage and greasewood on 80. chs.

Mar 5th 1882

BOOK-A-202

Salt Lake Meridian 50

General Description

The land in the eastern portion of this Township is hilly and covered with scattering cedars.

That of the western part is level or gently rolling covered with undergrowth of sage and greasewood.

The soil on Chalk creek and Hyrum creek bottoms in the south eastern portion and Cañon creek in the north eastern part is 1st and 2d rate. In the other portions generally 3d rate.

There is grass on the ridges in the eastern portion for grazing purposes.

There are settlers in secs 13 21. & 28.

Dorus B Warner's house and farm is situated in sec 27 and his cultivated field extends into Sec. 28 and embraces about

20 acres enclosed with good fence and al
14 acres cultivated Very highly
Shadrach M. Richardso
U. S. Dep Surveyor

[4. LIST OF NAMES.]

A list of the names of the individuals employed by Shadrach M. Richardson United States deputy surveyor, to assist in running, measuring, and marking the lines and corners described in the foregoing field notes of the survey of Township 21 South range 4 West

of the Salt Lake base and meridian in the Territory of Utah, showing the respective capacities in which they acted.

J. S. Giles, Compassman.

James F. Giles, Chainman.

Hiram Mace Jr, Chainman.

, Chainman.

, Chainman.

Louis B. Warner, Axeman.

B. A. Stringam, Axeman.

, Flagman.

Blank

Page

BOOK-A-202

[5.—FINAL OATHS OF ASSISTANTS.]

We hereby certify that we assisted Shadrach W. Richardson United States deputy surveyor, in surveying all those parts or portions of the Exterior and Subdivision lines of township 21 South range 4 West

of the Salt Lake base and meridian in the Territory of Utah, as are represented in the foregoing field notes as having been surveyed by him and under his direction; and that said survey has been in all respects, to the best of our knowledge and belief, well and faithfully surveyed, and the corner monuments established according to the instructions furnished by the United States surveyor-general for Utah.

J. S. Giles, Compassman.

James F. Giles, Chainman.

Hiram Macy jr, Chainman.

, Chainman.

, Chainman.

Dorus B. Warner, Axeman.

B. A. Stringam, Axeman.

, Flagman.

Subscribed and sworn to before me this 7 day of May 1884

B J Stringam
Justice of Peace

Blank

Page

BOOK-A-202

U. S. SURVEYOR GENERAL'S OFFICE,

Salt Lake City, Utah, Feby 21 1885

The foregoing field notes of the survey of the Subdivisions

Township No. 21 South *Range No.* 4 West

Executed by Shadrach M. Richardson

Under his contract No 123 *contract of the* 19th

day of December 188~~3~~2, *in the month of*

May 1884, *having been critically examined, the necessary corrections and explanations made, the said field notes, and the surveys they describe are hereby approved.*

Fred Salomon

U. S. Surveyor General for Utah.

Blank

Page

BOOK-A-202

REPORT: 1880

Filed 185 188

Examined by

Transcribed by H Atkinson

Compared by O E Salomon & H Atkinson

FIELD NOTES

OF THE SURVEY OF THE

Panguitch & Kanab Guide Meridian

OF

Township No. 37 South

Ranges No. 5 & 6 West

OF THE

SALT LAKE MERIDIAN

IN

UTAH TERRITORY,

AS SURVEYED BY

Shadrach M Richardson

U. S. Deputy Surveyor,

Under his Contract No. 123

Dated December 19th 1883

Survey commenced June 13rd 1884

Survey completed June 13rd 1884

NAMES AND DUTIES OF ASSISTANTS.

..... *Compassman.*

..... *Chainman.*

..... *Chainman.*

..... *Chainman.*

..... *Chainman.*

..... *Axeman.*

..... *Axeman.*

..... *Flagman.*

BOOK-A

[2. 1

We Je

o solemnly s
ully execute
e will level
ven ground
ticking or
eport the tru
he true leng
neasuring, t
nd in accor
n the survey
ion lines
range 6

f the Salt La
ory of Utah.

Je

p

ubscribed a
ay of June

[2.—PRELIMINARY OATHS OF CHAINMEN.]

We Jerome Axay

and John Crofts

o solemnly swear that we will well and faith-
ully execute the duties of chain carriers; that
e will level the chain upon even and un-
ven ground and plumb the tally pins, either by
icking or dropping the same; that we will
eport the true distance to all notable objects, and
he true length of all lines that we assist in
easuring, to the best of our skill and ability,
nd in accordance with instructions given us,
n the survey of the exterior and subdivi
ion lines of township 37 South
range 6 west

f the Salt Lake base and meridian in the Terri-
ory of Utah.

Jerome Axay, Chainman.

John Crofts, Chainman.

, Chainman.

, Chainman.

ubscribed and sworn to before me this 12
ay of June 1884

J. S. Giles
Notary Public

Blank

Page

BOOK-A-202

[3 — PRELIMINARY OATH OF AXEMEN.]

We, Joseph W. Gay

and John E. Cook

do solemnly swear that we will well and truly perform the duties of axemen, in the establishment of corners, and other duties, according to instructions given us, and to the best of our skill and ability, in the survey of the exterior and subdivision lines of township 37 South range 6 West

of the Salt Lake base and meridian in the Territory of Utah.

Jos. W. Gay, Axeman.

John E. Cook, Axeman.

Subscribed and sworn to before me this 12 day of June 1884

J. S. Giles

Notary Public

Blank

Page

Panguitch Guide Meridian 120

BOOK-A-202 191

T. 37 S. R. 5 and 6 W.

Note In subdividing T. 37 S. R. 6 W. I was unable to connect on to the Panguitch Guide Meridian, as many of the corners were thrown down and some could not be found I therefore deemed it necessary to re-survey the same I therefore begin at the cor. to Townships 36 and 37 South Ranges 5 and 6 W. which is a granite stone 17 X 10 X 10 ins. firmly set in the ground marked 6 notches on N. S. E. and W. edges. From which

A Cedar 15 ins. diam. brs. S. 18° W. 60 lks. dist. marked T. 37 S. R. 6 W. S 1 B. T. A Cedar 8 ins. diam. brs N. 25° W. 120 lks. dist. marked S 36 B. T. A Cedar 4 ins. dia. brs. N. 75° E. 20 Chs. dist. marked T. 36 S. R 5 W. S. 31 B. T. A Pine 8 ins. diam. brs. S. 87° E. 2 Chs. dist. marked S. 6 B. T.

Survey commenced June 13. 1884

Resurvey Panguitch Guide Meridian

Chains. Stake on a true re-survey line
bet. Secs. 1 and 6
Va 14° 45' E.

Descend

10.50 Foot of hill. Road from Mam
moth Saw mill to Panguitch bears
N. 80° W. and S. 80° E.

12.70 Fence brs. E. and W.

13.50 Road brs. E and W.

21.25 Edge of precipice about 50 ft
high brs. E. and W. descend

21.50 Enter cultivated field

28.00 Leave cultivated field, mammoth
Creek 75 lks. wide 3 ft deep rock
bottom, rapid current runs E.

32.50 Foot of bench at S. side of
Canon brs. E. and W. Ascend

40.00 Find ¼ Sec cor. Standing. Viz.
a sand stone 14 x 12 x 9 ins lim
ly set in the ground marked
4 on W. face from which
A Pine 4 ins. diam. brs. N. 21° W.
60 lks. dist. marked ¼ S. B. T.
A Pine 15 ins. diam. brs. S. 40° W.
94 lks. dist. marked ¼ S. B. T.

T. 37 S. R. 5 and 6 W.

Chains.

80.00 Cor. down and out of place, reset same
A white flint stone 15 X 13 X 12 ins.
10 ins. in ground marked notch
on the N. 5 on S. and 6 on E
and W. edges for re-established
Cor. to Secs. 1, 6, 7 and 12 and rais-
ed a mound of ~~earth and~~ stone
along side
Land rolling
Soil 2nd rate
Timber scattering Cottonwood
Cedar and pine
Dense undergrowth sage
brush on 73.50 Chs.

South on a true resurvey line
bet Secs. 7 and 12
Va 16° 00' E.

.25 Ravine drains East
9.50 Rocky ravine drains east
40.00 Cor. down and out of place reset same
a sand stone 18 X 12 X 10 ins. 12
ins. in ground for re-established

Re-Survey Panguitch Guide Meridian

Chains	
	1/4 sec. cor. raised a mound of earth and stone along side
62.00	Wash drs. E. and enter sage sid
7.00	Road brs. N. E. and S. W.
	Enter Sevier river bottom
80.00	No trace of cor. Set a sand stone 18 X 15 X 10 ins. 12 ins in ground for re-established cor to secs. 7, 12, 13 and 18, marked 2 notches N. and 4 notches South edges and raised a mound of earth and stone along side
	Land rolling bench
	Soil 2nd rate
	Timber scattering cedars and pine
	Dense undergrowth sage brush on 80.00 chs.
	South, on a true resurvey line bet. secs. 13 and 18.
	Va. 16°00' E.
1.50	Sevier River 75 lks. wide 3 ft deep rapid current rocky

T. 37

Chains	
19.70	S
21.00	
22.00	
24.00	
33.00	Se
40.00	N
	15
	f
	f
	an
	an
	1
	Si
40.50	Se
50.25	
59.00	Po
61.00	S
66.50	Ri
	1/3
67.00	L
	be
80.00	F
	F
	n

T 37 S. R 5 and 6 W.

Chains
19.70 bottom rapid current runs N. E.
Sevier river 50 lks. wide runs N. W.
21.00 " " " " " " N. E
22.00 " " " " " " N. W.
24.00 " " " " " " E
33.00 Sevier River runs W. 50 lks wide
34.00 No trace of Cor. Set a Sand Stone 15 X 10 X 8 ins. 10 ins. in ground for 1/4 Sec. cor. Marked 1/4 on W. face dug pits 18 X 18 X 12 ins N. and S. of Stone 5½ ft. dist N. and raised a mound of Earth 1½ ft. high 3½ ft. at base along side.
40.50 Sevier River 70 lks wide runs N. E.
50.25 " 80 " " " W.
59.00 Point of ridge
60.00 Sevier River 80 lks wide runs E.
66.50 Right bank of of Sevier river 50 lks. E. runs E.
67.00 Leave bottom and ascend bluff bears N. E and S. W.
82.00 Find Cor. down, re set same a Flint Stone 19 X 16 X 14 ins. 12 ins in ground for re-established

Re-Survey Panguitch Guide Meridian T. 37 S.

Chains	
	cor. to secs. 13, 18, 19 and 24 and raised a mound of earth and stone along side
	Land rolling
	Soil 2nd rate
	No timber
	South, on a true resurvey line between secs. 19 and 24
	Va. 16°00' E.
10.00	Ridge bears N. E. and S. W.
20.00	Enter sage flat
40.00	Find sand stone 14 X 12 X 10 ins. firmly set in the ground, for sec. cor. marked 1/4 on W. face from which
	A cedar 13 ins. diam. brs. S. 65° E. 93 lks. dist. marked 1/4 S. B. no other tree convenient to mark raised a mound of stone along side.
41.50	Foot of ridge brs. E. and W.
68.50	Road brs. E. and W.
80.00	Corner has been thrown down and

T 37 S. R. 5 and 6 W.

Chains misplaced re set same, a sand stone 16X16X8 ins. 10 ins. in ground, for re established cor. to secs. 19, 24, 25 and 30 marked 4 notches on N. and 2 notches on S. Edges and raised a mound of earth and stone along side.

Land rolling bench soil 2nd rate

Timber scattering Cedar and Pine

Dense undergrowth sagr brush on 80.00 chains.

South, on a true resurvey line between secs. 25 and 30

Va 15° 30' E.

4000 No trace of old cor. set a gray lime stone 16X12X10 ins. 10 ins. in ground, for re-established 1/4 sec. cor. dug pits 18"X18"X12" N. and S. of stone 5 1/2 ft. dist and raised a mound of earth

Resurvey Paugitch Guide Meridian.

Chains.	
	1½ ft. high 3½ ft. base along side.
55.00	Foot of hill
75.00	Large ravine drains N.W.
80.00	Cor. down re-set same a sand stone 19 X 10 X 5 ins. 12 ins. in in ground for re-established cor. to Secs. 25, 30, 31 and 36, marked 5 notches on N. 1 on S. and 6 on E. and W. edges, and raised a mound of ~~Earth~~ and stone along side
	Land rolling bench
	Soil 2nd rate
	Dense undergrowth sage brush on 80.00 Chains
	South, on a true resurvey line between Secs. 31 and 36
	Va. 15° 30' E.
28.50	Cedar 15 ins. diam. continue along East slope of ravine
40.00	Find Sand stone 15 X 14 X 6

BOOK-A-202

T. 37 S. R. 5 & 6 W.

Chains. ins. firmly set in ground, for 1/4 Sec. cor. marked 4 on W. face, and to perpetuate same raised a mound of ~~earth~~ earth and stone along side

80.00 Find Cor. to Sec. 37 and 38 S. Rs. 5 and 6 W. built a land stone 14X13X10 ins. firmly set in the ground, marked 6 notches on N. S. E and W. edges in a pavine bears N. 10° W. with a mound of earth and stone along side.

Land rolling bench

Soil 2nd rate,

Timber scattering Cedar and Pine

Dense undergrowth sage brush on 80.00 Chains

June 13. 1884

For General Description
see Subdivisional Notes.

Shadrach M. Richardson

U. S. Deputy Surveyor

Blank

Page

Blank

Page

U. S. SURVEYOR GENERAL'S OFFICE,

Salt Lake City, Utah, Feby 21 1884

The foregoing field notes of the survey of the Paunsaugunt & Kanab Second Meridian

Township No. 37 South *Range No.* 5 & 6 W

Executed by Shadrach M. Richardson

Under his *contract* No 723 *of the* 19th

day of December 1883, *in the month of*

June 1884, *having been critically examined, the necessary corrections and explanations made, the said field notes, and the surveys they describe are hereby approved.*

Frd Salomon

U. S. Surveyor General for Utah.

Blank

Page

BOOK-A-202

REPORT: 205

Filed 188

Examined by

Transcribed by E. Michaelis

Compared by E. Michaelis & H. Atkinson.

FIELD NOTES

OF THE SURVEY OF THE

Subdivisions

OF

Township No. 37 South

Range No. 6 West

OF THE

SALT LAKE MERIDIAN

IN

UTAH TERRITORY,

AS SURVEYED BY

Shadrach M. Richardson

U. S. Deputy Surveyor,

Under his Contract No. 123

Dated December 19. 1883.

Survey commenced June 14th 1884

Survey completed June 23rd 1884

BOOK-A-202

Township 37 S. R. 6 W.

6	291	5	267	4	250	3	235	2	220	1
290		288		266		249		234		219
7	286	8	264	9	247	10	232	11	218	12
284		283		263		246		231		217
18	281	17	261	16	245	15	230	14	215	13
280		278		259		243		228		214
19	277	20	258	21	242	22	227	23	212	24
275		274		256		241		226		211
30	272	29	255	28	239	27	225	26	209	25
271		270		253		238		223		208
31	269	32	251	33	237	34	222	35	207	36

Panguitch and Kanab Guide Meridian

NAMES AND DUTIES OF ASSISTANTS.

.....*Compassman.*

.....*Chainman.*

.....*Chainman.*

.....*Chainman.*

.....*Chainman.*

.....*Axeman.*

.....*Axeman.*

.....*Flagman.*

Subdivision T 37 S R 1 W

Chains Preliminary to commencing this survey, I ran north on a blank line on the south boundary of sec. 36 and at 39.93 chs. found the 1/4 sec cor. My compass will therefore run the same line as the exterior boundaries, and the chaining practically agrees.

Survey commenced June 14 1884 with a Burts improved Solar Compass.

I commenced at the cor to secs. 1, 2, 35 and 36, on the south boundary, established by ~~myself~~ me under present contract.

Iran
on a re-survey line
North, bet secs. 35 and 36.

Va. 15°20' E.

1150 Road brs. N. W. and S. E.

2030 Fence brs. E & W. 2 00 chs, thence N. 40° W. South line of J. R. Cuttlers farm.

[illegible] Fence brs. E and W. N. line of J. R. Cuttlers claim, and south line of James Littles farm.

[illegible]00 Found cor. stone down. Re-set same which is a sandstone 15 x 10 x 7 ins

Subdivision T 37 S R 6 W

Chains	
	10 ins. in the ground, for re-established ¼ sec. cor. marked ¼ on W. face, dug pits 18×18×12 ins. N. and S. of stone 5½ ft. dist, and raised a mound of earth and stone 1½ ft. high, 3½ ft. base, alongside
61.95	Fence brs. E. and W.
80.00	Cor. down. Reset same which is a sandstone 14×9×4 ins. 9 ins. in the ground, for re-established cor. to secs. 25, 26, 35 and 36, marked 1 notch on E. and S. edges, and raised a mound of earth and stone alongside.
	Land, nearly level.
	Soil, 1st rate.
	No Timber.
	East on a re-surveyed random line bet. secs. 25 and 36.
	Va. 15° 20' E.
40.00	Set temporary ¼ sec. cor.
80.50	Intersect E. boundary of Tp. 42 N. of the cor. to secs. 25, 30, 31 and 36, re-established under present contr.

Salt Lake Meridian 3 4 1

Thence

N. 89°42' W. on a true line bet. secs. 25 and 36. with same va.

500 Wash drs. N. W.
2000 Ridge brs. N. & S.
3000 Wash in hollow drs. N. W.
[illegible]25 Cor. down. Set sandstone 16 x 10 x 8 ins. 11 ins. in the ground, for re-established 1/4 sec. cor. marked 1/4 on the face, from which

A cedar 8 ins. in diam. brs. N. 35° W. 50 lks. dist., marked 1/4 S. B. T.

No other tree within limit, ~~therefore~~ and raised a mound of stone alongside.

4200 Ridge descends N. W.
[illegible]00 Enter field. Fence brs. N. and S.
Leave brush. ~~Enfoot~~ of bench
[illegible]200 Creek. 10 lks. wide 6 ins. deep runs N.
[illegible]50 The cor. to secs. 25, 26, 35 and 36.
Land, rolling and level.
Soil, 1st rate.
Dense undergrowth sage brush on 6000 chs.

North on a re-survey line bet. secs. 25 and 26.

Va. 15°20' E.

[illegible]50 Enter Cultivated land.
[illegible]25 Fence brs. N. E. and S. W. Leave cultivated

Subdivision T. 37 S. R. 6 W.

Chains		Chains	D.
	land.		
37.00	James Little's house and barn 2.00 ch. E. of line.		
38.40	Fence brs. E. 1.50 chs. thence N. E.		
40.00	No trace of cor. Set blue limestone 20 in. x 12 ins. 15 ins. in the ground, for re-established ¼ sec. cor. marked on W. face, dug pits 18 x 15 x 12 ins. N. E. and S. of stone 2½ ft. dist. and raised a mound of earth 1½ ft. high, 3½ ft. base along side.	40.00	20.36
41.50	Fence brs. N. E. and S. W. N. W. line of James Little's land.		
42.00	Road brs. N. E. and S. W.	38.00	
44.00	Ridge brs. " " " " Enter timber and brush ascend abruptly	40.18	
74.00	Ridge brs. N. E. and S. W. about 1000 ft. above cr. Leave timber		
80.00	This cor. not having been established set sandstone 14 in. x 4 ins. 9 ins. in the ground, for cor. to secs. 23, 24, 25 and 26, marked 2 notches on S. and 1 notch on E. edge and raised a mound of earth and stone along side	42.00	
	Land, rolling and level.	56.00	
	Soil, 1st and 3rd rate.	60.56	

BOOK-A-202

Salt Lake Meridian

chains Dense undergrowth oak brush on 36 chs.
Timber pine on 30.00 chs.
High mountain on 3600 chains

East on a re-survey random line
bet. secs. 24 and 25.
Var. 15° 20' E.

40.00 Set temporary 1/4 sec. cor.
40.36 Intersect E. boundary of Tp. 65 lks. N. of
the cor. to secs. 19, 24, 25 and 30, re-estab-
lished under present contract.
Thence
N. 89° 32' W. on a true line bet. secs.
24 and 25 with same va.
38.00 Foot of bench bs. N.E. & S.W.
40.18 Cor. destroyed. Set cobble stone 16 x 10 x 6 ins.
11 ins. in the ground, for re-established 1/4 sec. cor. marked 1/4 on W. face,
dug pits 18 x 18 x 12 ins. E. and W. of
stone 5 1/2 ft. dist., and raised a
mound of earth 1 1/2 ft. high, 3 1/2 ft.
base alongside.
24.00 Branch of Sevier River 10 lks. wide
2 ft. deep runs N.
56.00 Road N.E. & S.W.
60.00 Find witness cor. thrown down.
Reset same which is a sandstone

Subdivision T 37 S R 6 W.

Chains	
	16 x 10 x 6 ins. 11 ins the ground, for re-established W.C. cor. to secs. 23, 24, 25 & 26 marked 1 notch on E. and 2 notches on S. edges, and W.C. for witness cor. from which
	A pine 24 ins. in diam. brs. N. 80° E. 70 lks. dist., marked W.C. S 24 B.T.
	A pine 20 ins. dia bears S. 60° E. 80 lks. dist marked W.C. S. 25 B.T.
60.00	Foot of abrupt mountain
69.00	Top of mountain, About 1000 ft above cr.
80.35	The cor. to secs. 23, 24, 25 and 26.
	Land, rolling and mountainous
	Soil, 1st and 3rd rate.
	Dense undergrowth sage brush on 80.35 chs.
	North on re survey line bet. secs. 23 and 24.
	Va. 15° 20' E.
3.00	Enter scattering timber.
38.50	Ravine drs. W. Enter dead timber
40.00	Failed to find cor. Set limestone 18 x 10 x 9 ins. 12 ins. in the ground

Adams for re-established ¼ sec. cor. marked ¼ on W. face, and raised a mound of earth and stone alongside.

42.50 Ridge brs. E. and W. Leave timber and brush.

47.00 Ridge brs. W. E. and S. W.

65.25 South bank of Asay Creek 100 lks wide 3 ft. deep runs N. E.

79.00 Road brs N. E. and S. W.

80.00 Found cor. down. Set limestone 15 X 14 X 12 ins. 10 ins. in the ground, cor. to Secs. 13, 14, 23 + 24 for re-established ¼ marked 3 notches on S and 1 notch on E. edges, and raised a mound of stone alongside. X

Land, mountainous.

Soil, 1st and 4th rate.

Dense undergrowth oak brush on 80 chs.

From this cor. Robert H. Vancurs house brs. N. 88° E. about 16 chs. dist. Aaron Asays house brs. S. 85° E. 19 chs. dist.

8 Subdivision T 37 S R 6 W

Chains	
	East on a resurvey random line bet. secs 13 and 24.
	Va. 15°20' E.
40.00	Set temporary 1/4 sec cor
80.45	Intersect E. boundary of Tp. 55 lks N. of the cor. to secs 13, 18, 19 and 24 re-established under present contract.
	Thence
	N. 89°36' W. on a true line bet. secs 13 and 24, with same va.
20.00	Foot of ridge. Enter brush.
25.00	Branch of Sevier River 100 lks. wi 4 ft. deep runs N. E.
35.00	Ridge. Isaac Asays house about 6 chs. N. of line
40.23	Found 1/4 sec. cor. which is a Limestone 16 x 15 x 12 ins firmly set in the ground, for 1/4 sec. cor. marked on N. face, and a mound of earth and stone alongside
42.00	Thomas Asays house bis. S. 6.25 chs. S. of line
44.00	Jerome Asays house is 6 chs south of
46.00	Ridge bis. N. and S.

Salt Lake Meridian 9

Chains	Foot of Ra
48.50	Wash at foot of ridge drs S.
76.00	Log house 2.50 lks. N. of line
11.00	Aaron Asays log house 50 lks. S. of line.
64.00	Robert Moncur's log house 1.00 chs N. of line.
15.00	Road from Asays place to Hammoth Creek brs. N. 85° W. and S. 85° E.
78.50	Road brs. N. E. & S. W.
80.45	The cor. to secs. 13, 14, 23 and 24.
	Land, rolling and broken.
	Soil, 1st & 3rd rate.
	Dense undergrowth sage brush on 6000 chs.

North bet. secs. 13 and 14.

Va. 15° 20' E.

6.10	Mountains brs. E. & S. 72° W.
5.00	Enter timber
14.00	Ridge brs. N. W. and S. E.
26.00	Ravine drs. S. E.
33.00	Ridge brs. S. 70° E.
40.00	Set limestone 14 x 10 x 4 ins. 9 ins. in the ground, for 1/4 sec. cor. marked

10 Subdivisional T. 37 S. R. 6 W.

Chains	14 on W. face, from which
	a pine 30 ins. in diam. bs. S. 45° E.
	70 lks. dist, marked 14. S. B. T.
	No other tree convenient to mark,
	~~because~~ and, raised a mound of
	earth and stone alongside.
49.00	Ridge bs. N. W. and S. E.
60.70	Ravine drs. S. E. Wood road bs.
	S. E. and N. W.
80.00	Set limestone 18 ins.
	x 9 ins. 12 ins. in the ground, for
	cor. to secs. 11, 12, 13 and 14, marked
	4 notches on S. and 1 notch on E.
	edges, from which
	a pine 3 ins. in diam. bs. N. 45° E.
	10 lks. dist., marked
	T. 37 S. R. 6 W. S. 12 B. T.
	No other tree within limits, raised Stone
	Land mountainous.
	Soil 4th rate
	Scattering pine timber on 75.00 chs
	Dense undergrowth sage brush on
	80 chs.
	~~Scattering pine timber.~~
	June 14th 1884

BOOK-A-202

Salt Lake Meridian

Chains East on a random line bet. secs. 12 and 13
Va. 15°20' E.

40.00 Set temporary 1/4 sec. cor.

80.26 Intersect E. boundary of Tp. 40 lks. N. of the cor. to secs. 7, 12, 13 and 18 established under present contract.

Thence

N. 89°50' W. on a true line bet. secs. 12 and 13 with same va.

20.00 Ridge decends S. E.

40.13 Set limestone 16×10×6 ins. 11 ins. in the ground, for 1/4 sec. cor. marked 1/4 on N. face, and raised a mound of earth and stone alongside.

60.00 Ravine drs. S. E.

[illegible].00 Ridge brs. S. E. Leave scattering timber.

80.26 The cor. to secs. 11, 12, 13 and 14.

Land, mountainous and rolling.

Soil, 1st and 4th rate.

Scattering timber on 76.26 chs.

Dense undergrowth sage brush on 80.26 chs.

12. Subdivisional T. 37 S. R. 6 W.

Chains	
	North bet. secs. 11 and 12.
	Va. 15° 20' E.
21.50	Ridge brs. N. W. and S. E.
33.00	Ravine drs. S. E. Enter scattering timber
40.00	Set limestone
	17 x 12 x 7 ins. 11 ins. in the ground
	for 1/4 sec. cor. marked 1/4 on W.
	face, from which
	Cornut pine 11 ins. in diam. brs. N. 80°
	12 lks. dist, marked 1/4 S. B. T.
	Hoother tree within limits, ~~they~~ and
	raised a mound of earth and
	stone alongside.
53.00	Ridge brs. S. W. and N. E.
63.00	Ravine drs. N. E.
80.00	Set limestone 15 x 11 x
	ins. 10 ins. in the ground for c
	to secs. 1, 2, 11 and 12, marked 3 notc
	on S. and 1 notch on E. edges,
	from which
	Cornut pine 14 ins. in diam. brs. S. 42° W.
	60 lks. dist, marked
	T. 37 S. R. 6 W. S. 11 B. T.
	Hoother tree within limits
	raised a mound of earth and s

Chains	
40.00	
40.60	
15.00	
41.30	

BOOK-A-202

Salt Lake Meridian.

along side.
Land mountainous.
Soil rock and gravel
Scattering timber cedar 47.00 chs
Dense undergrowth service-berry
on 80 chs.

East on a random line bet.
secs. 1 and 12.
Va. 15°30' E.

4.00 Set temporary 1/4 sec. cor.
10.60 Intersect E. boundary of Tp. 50 lks
N. of the cor. to secs. 1, 6, 7 and 12
re-established under present
contract.

Thence
N. 89°39' W. on a true line bet.
secs. 1 and 12 with same va.
15.00 Ridge bs. N. E. and S. W.
15.30 Set blue limestone 14 x 10 x 6 ins.
9 ins. in the ground, for 1/4 sec.
cor. marked 1/4 on N. face, and
raised a mound of earth
and stone alongside.

14. Subdivision T 37 S R 6 W

Chains	
50.00	Ravine drs. N. E.
70.00	Ridge brs. N. E.
80.60	The cor. to secs. 1, 2, 11 and 12.
	Land, rolling and mountains.
	Soil, 3rd and 4th rate.
	Scattering Cedar timber on 80.60
	Dense undergrowth service berry
	and sage brush on 80.60 chs.
	North bet. a random line bet.
	secs. 1 and 2.
	Va. 15°20' E.
40.00	Set temporary 1/4 sec. cor.
80.30	Intersect N. boundary of Tp. 70
	lks. W. of the cor. to secs. 1, 2, 35
	and 36. which is a quartzite stone
	16×12×5 ins firmly set in the
	ground marked 1 notch on E and
	5 notches on w. edges from
	which a pine 6 ins. diam. brs. N.
	30° W. 2.63 Chs. dist marked
	T. 36 S. R. 6 W. S. 35 B. T.
	no other tree within

BOOK-A-202

Salt Lake Meridian

Chains limits and raised a stone mound along side

Thence
S. 0°30' W. on a true line bet. secs. 1 and 2 with same va.

20.00 Road bs. E. and W. at ft of bench

28.00 Enter Willows.

39.00 Mammoth Creek 60 lks. wide 3 ft. deep runs E.

40.50 In creek bottom. Set limestone 16 x 12 x 9 ins. 11 ins. in the ground for 1/4 sec. cor. marked 1/4 on W. face and raised a mound of earth and stone along side

42.00 Leave willows ascend through sage

50.00 Ridge descends N. E. Enter timber

59.00 Canyon drs. N. E.

Subdivisional T. 2 S. R. 6 W.

Chains	
72.50	Ridge bet. N. E. and S. W.
80.30	The cor. to secs. 1, 2, 11 and 12.
	Land mountainous and rolling.
	Soil, rock, gravel and sand 2nd and 4th rate.
	Scattering timber on 30.00 chs.
	Dense undergrowth on 42.00 chs.
	June 16th 1884
	From the cor. to secs. 2, 3, 34 and 35 on the South boundary of Tp. established under present contract
	Drawn
	North bet. secs. 34 and 35.
	Va. 15° 20' E.
6.00	Road bet. N. E. and S. W.
13.00	Enter pine timber. Ascend.
25.00	Ridge descends S.
27.00	Foot of ridge. Leave timber.
40.00	Set sandstone 24 x 12 x 3 ins. 18 ins. in the ground for 1/4 sec. cor. uncertified 1/4 on W. face, and raised a mound of earth and stone alongside.

BOOK-A-202

Salt Lake Meridian 17 [illegible]

Chains	
[illegible]50	Ridge brs. N.E. and S.W.
[illegible]00	Enter timber
[illegible]00	Head of ravine drs. E.
[illegible]00	Mountain course N.E. and S.W.
	Enter dead timber. Ravine drs. W.
[illegible]00	Set sandstone 14 x 12 x 4 ins. 9 ins. in the ground, for cor. to secs. 26, 27, 34 and 35, marked 2 notches on E. and 1 notch on S. edges, and raised a mound of stone alongside. Ravine drs. N.
	Land, mountainous and level.
	Soil, 1st and 4th rate.
	Timber, pine on 49 chs.
	High mountains on 80.00 chs.
	East on a random line bet. secs. 26 and 35.
	Va. 15°20' E.
[illegible]00	Set temporary 1/4 sec. cor.
[illegible]30	Intersect N. and S. line 40 lks. N. of the cor. to secs. 25, 26, 35 and 36.

Thence

Subdivision T. 37 S. R. 1 W.

Chains		Chains
	N. 89° 43' W. on a true line bet. secs. 26 and 35, with same ra.	
.90	Fence brs. N. E. and S. W.	20.00
7.50	Road brs. N. and S.	36.30
10.50	" " N. E. and S. W.	39.50
20.00	Ridge course N. E. and S. W. Enter timber	40.00
30.00	Ridge decends S. E.	
35.00	Hollow drs. S. E.	
40.15	Set sandstone 18 x 8 x 8 ins. 12 ins. in the ground, for 1/4 sec cor. marked 1/4 on N. face, from which	
	A pine 18 ins. in diam. brs. N. 20	42.00
	120 lks. dist., marked 1/4 S. B.	40.00
	No other tree within limits,	61.00
	raised a mound earth and	65.00
	stone alongside	75.00
50.00	Ridge decends S. E.	80.00
59.00	Ravine drs. S. E.	
80.30	The cor. to secs. 26, 27, 34 and 35	
	Land, mountainous	
	Soil, 1st and 4th rate.	
	Timber, pine on 60 chs.	
	Mountainous on 80.30 chs.	

Salt Lake Meridian 19[illegible]

Chains	North bet. secs. 26 and 27. Va. 15°20' E.
20.00	Leave dead timber.
36.30	Ridge decends W.
39.50	Ravine drs. N. W.
40.00	Top of steep ridge decends N. W. Set sandstone 18×12×4 ins. 12 ins in the ground, for 1/4 sec. cor. marked 1/4 on W. face, from which A pine 15 ins. in diam. brs. E. 20° W. 55 lks. dist. A pine 6 ins. in diam brs. S. 5° W. 50 lks. dist, each marked 1/4 S. B.T.
42.00	Ravine drs. N. W.
50.00	Ridge decends N. W.
61.00	Leave timber.
65.00	Mouth of ravine drs. N. W.
75.00	Ridge decends W.
80.00	Set sandstone 19×12×10 ins. 12 ins. in the ground for cor. to secs. 22, 23, 26 and 27, marked 2 notches on E. and S. edges, and raised a mound of earth and stone alongside. Land, mountainous.

20 Subdivision T. 27 S. R. 6 W.

Chains Soil, rock and gravel 3rd & 4th rate.

Timber, pine on 61.00 chs.

High mountains on 80.00 chs.

East on a random line bet. secs. 23 and 26

Va. 15°30' E.

40.00 Set temporary 1/4 sec. cor.

80.50 Intersect N. and S. line 70 lks. N. of the cor. to secs. 23, 24, 25 and 26

Thence

N. 89°30' W. on a true line bet. secs. 23 and 26 with same re

.75 Ridge decends N. E.

9.60 Ravine drains " "

31.50 Ridge decends N. E.

40.25 Set sandstone 16 x 10 x 8 ins. 11 ins. in the ground, for 1/4 sec. cor. marked 1/4 on N. face, from wh. a nut pine 20 ins. in diam. bs. S. 85 E. 60 lks. dist., marked 1/4 S. B. No other tree within limits. raised a mound of earth an stone alongside.

Salt Lake Meridian 21

Chains	
5.00	Ranne drs. N.W. Enter brush.
1.50	Ridge decends N.W.
0.00	Ridge course N.E. and S.W.
0.50	The cor. to secs. 22, 23, 26 and 27.
	Land, mountainous.
	Soil, 4th rate.
	Scattering timber on 70.50 chs.
	Underundergrowth on 55. chs.
	High mountains on 80.00 chs.
	North bet secs. 22 and 23.
	V.W. 15°20' E
5.00	Enter creek bottom, brs. N.E. & S.W.
9.00	Asays Creek 100 lks. wide 3 ft. deep runs N.E.
0.00	Ascend
3.65	Road brs. N.E. and S.W.
7.00	Enter timber. Mountain brs. N.E. and S.W.
0.50	Set limestone 18x12x8 ins. 9 ins. in the ground, for 1/4 sec. cor. marked 1/4 on W. face, from which,
	A pine 30 ins. in diam. brs. E. 55° lks. dist, marked 1/4 S.B.T.
	No other tree within limits.

22 Subdivision T. 37 S. R. 1 W.

Chains		Chains
	Chain and raised mound of earth & stone along it.	
42.50	Bridge descends N. E.	
73.50	Hill brs. E. Leave timber. Enter willows and brush.	
75.40	North fork of Asays Creek, 40 lks. wide 3 ft. deep brs. S. E.	5.90
		17.00
78.50	Road brs. S. E. and N. W.	
80.00	Set sandstone 15 x 9 x 4 ins. 10 ins. in the ground, for cor. to secs. 14, 15, 22 and 23, marked 3 notches on S. and 2 notches on E. edge and raised a mound of earth and stone alongside.	24.00
		32.00
		40.00
	Land, mountainous.	
	Soil, 1st and 4th rate.	
	Scattering timber on 52.60 chs.	
	Dense undergrowth sage brush on 6.25 chs.	
	High mountains on 80.00 chs.	44.50
	East on a random line bet. secs. 14 and 23.	55.00
		60.00
	Va. 15° 20' E.	75.50
40.00	Set temporary 1/4 sec. cor.	40.10
80.10	Intersect N. and S. line, 35 lks.	

Salt Lake Meridian 23

Chains	N. of the cor. to, secs. 13, 14, 23 and 24.
	Thence
	N. 89°45' W. on a true line bet. secs. 14 and 23 with same vá.
5.90	Road brs. N. 80° E. and S. 50° W.
17.00	Mountain course N. E. and S. W.
	Enter timber and brush.
24.00	Ridge decends S.
32.00	Ravine drs. S.
40.00	Set limestone 16 × 14 × 3 ins. 11 ins. in the ground, for 1/4 sec. cor. marked 1/4 on N. face, from which
	A nut pine 20 ins. in diam. brs. S. 50° W. 8 lks. dist.
	A nut pine 16 ins. in diam. brs. N. 45° E. 10 lks. dist., each marked 1/4 S. B. T.
	From this cor. North side of field brs. S. 200 lks. dist.,
44.50	Mountain ridge decends S.
	Leave brush.
55.00	Ravine drs. S.
60.00	Ridge decends S.
75.50	Mountain brs. S. E. and N. W.
80.10	The cor. to secs. 14, 15, 22 and 23.
	Land, mountainous.

Chains		Chains
	Soil, 1st and 4th rate.	
	Scattering timber, pine on 65.50 chs.	40.00
	Dense undergrowth oak brush on 36.60 chs.	
	High mountains on 80.00 chs.	
	June 17th 1884	
	North bet. secs. 14 and 15. Va. 15° 20' E.	
8.00	Mountain brs. S. E. and N. W.	
	Center timber.	
13.00	Ridge descends S. W.	
20.00	Ravine drs. S.	
40.00	Set sandstone 16 x 9 x 6 ins. 11 ins. in the ground, for 1/4 sec. cor. marked 1/4 on W. face, from which	
	A nut pine 9 ins. in diam. br. N. 40° W. 25 lks. dist.	
	A nut pine 12 ins. in diam. br. N. 5° E. 10 lks. dist., marked 1/4 S. B. T.	40.00 / 10.20
45.00	Mountain ridge course N. 70° E. and S. 70° W. Leave timber.	
54.00	Wash drs. N. E.	
61.00	Ridge descends N. E.	
72.00	Ravine drains " "	40.00
76.50	Ridge descends N. E.	16.00

Salt Lake Meridian 25

Chains

8000 Set sandstone 14x10x6 ins. 9 ins. in the ground, for cor. to secs. 10, 11, 14 and 15, marked 4 notches on S. and 2 notches on E. edges, and raised a mound of stone alongside.

Land, mountainous.

Soil, 4th rate.

Timber on 37.00 chs.

Dense undergrowth, sage and wild crab apple on 80 chs.

High mountains on 80.00 chains

East on a random line bet. secs. 11 and 14.

Va. 15°20' E.

4000 Set temporary 1/4 sec. cor.

80.20 Intersect N. and S. line 60 lks N. of the cor. to secs. 11, 12, 13 and 14.

Thence

N. 89°34' W. on a true line bet. secs. 11 and 14, with same va

4.00 Ridge decends S. E.

16.00 Ravine drains "

26 Subdivision T. 37 S. R. 6 W.

Chains	
29.00	Ridge bears S. E.
35.00	Wood road in ravine drs. S. E. and N. W.
40.00	Set limestone 16 x 12 x 3 ins. 11 ins. in the ground, for 1/4 sec. cor. marked 1/4 on N. E. face, from which
	Co pine 16 ins. in diam. bs. N. E. 20 lks. dist.
	Co pine 30 ins. in diam. bs. S. 4 lks. dist. each marked 1/4 S. B. T.
75.00	Leave timber
80.20	The cor. to secs. 10, 11, 14 and 15
	Land mountainous and rocky.
	Soil rocky 4th rate.
	Timber, scattering pine on 75.20 chs.
	Dense undergrowth oak brush on 80.20 chs.
	High mountains on 80.20 chs.
	North bet. secs. 10 and 11
	Va. 15° 20' E.
4.00	Enter scattering timber
19.00	Ravine drs. S. E. Wood Road bs. S. E. and N. W.

BOOK-A-202

Salt Lake Meridian 27

Chains	
30.00	Leave timber and brush.
40.00	Set sandstone 14×10×5 ins. 9 ins in the ground, for 1/4 sec. cor. marked 1/4 on W. face, and raised a mound of earth and stone alongside.
45.00	Mountain ridge decends N. E.
50.00	Head of ravine drs. N. E.
70.50	Ridge decends N. E.
71.75	Ravine drs. N. E.
76.00	Ridge decends N. E.
80.00	Set sandstone 14×12×9 ins. 9 ins in the ground, for cor. to secs 2, 3, 10 and 11, marked 5 notches on S. and 2, notches on E. edges, and raised a mound of earth and stone alongside.

Land, mountainous.

Soil, 4th rate

Dense undergrowth serviceberry on 80 chs.

Timber on 26.00 chs.

High mountains on 80.00 chs.

38. Subdivision T 37 S R 6 W

Chains	
	East on a random line bet. secs. 2 and 11.
	Va 15°20' E.
40.00	Set temporary 1/4 sec. cor.
80.38	Intersect N and S line 70 lks North of the cor. to secs. 1, 2, 11 and 12
	Thence
	N. 89° 30' W. on a true line bet. secs. 2 and 11. with same va.
7.00	Ridge decends N. E. enter pine timber
24.00	Ravine drains N. E.
35.00	Ridge decends N. E.
40.19	Set limestone 14 x 10 x 4 ins. 9 ins. in the ground, for 1/4 sec. cor. marked 1/4 on N. face, from which
	A pine 10 ins. in diam. brs. S 45° W. 100 lks. dist,
	A pine 8 ins. in diam. brs. N 45° E 40 lks. dist, each marked 1/4 S. B. T.
55.00	Ravine drs. N. E.
76.00	Ridge decends N. E. Leave timber
80.38	The cor. to secs. 2, 3, 10 and 11 lks.
	Land, mountainous.
	Soil, 4th rate.
	Timber Pine on 69. chs

Chains Dense undergrowth oak and service berry on 69 chs.
High mountains on 80.38 chains

North on a random line bet. secs. 2 and 3.
Va. 15° 20' E.

40-0-0 Set temporary ¼ sec. cor.
40.90 Intersect N. boundary of Tp. 40 lks. W. of the cor. to secs. 2, 3, 34 and 35. which is a quartzite stone 16 x 10 x 8 ins. firmly set in the ground marked with 2 notches on E. and 4 notches on W. edges from which a cedar 4 ins. dia. brs. S. 40° W. 20 lks. dist marked T. 37 S. R. 6 W. S. 3 B. T.
A Nut pine 8 ins. dia. brs. N. 15° W. 25 lks. dist. marked T. 36 S. R. 7 W. S. 34 B. T.
A Nut Pine 28 ins. diam. brs N. 8° E. 183 lks. dist. marked T. 36 S. R. 7 W. S. 35 B. T.
A Nut pine 6 ins. diam. brs.

30. Subdivision T. 37 S. R. 7 W.

Chains		Chains
	S. 40° E. 37 lks. dist. marked T. 37 S. R 7 W. S. 2 B. T.	
	Thence I run S. 17 W. on a true line bet. Secs. 2 & 3 with same Va	
5.00	Ridge course N. E. and S. W. Leave timber	
18.00	Road brs. N. E. and S. W.	
25.00	Water ditch. runs N. E	
31.50	Mammoth Creek 50 lks. wide 3½ ft. deep drs. N. 87° E. Enter brs	16.00
		19.00
34.00	Enter scattering timber	24.00
40.90	Set flint stone 15 x 9 x 7 ins. 10 ins	31.00
	in the ground, for ¼ sec. cor.	31.00
	marked ¼ on W. face, from which	40.00
	Spine 20 ins. in diam. brs. N. 80	
	15 lks. dist, marked ¼ S. B. T.	
	No other tree within limits: raised a mound of earth and stone alongside	
40.50	Mouth of ravine drains N. E.	
65.00	Leave scattering timber brs N. E.	25.80
80.98	The cor. to secs. 2, 3, 10 and 11.	62.50
	Land mountainous	1.50
	Soil, 1st and 4th rate.	12.00

BOOK-A-202

Salt Lake Meridian. 31

Timber scattering Pine on 36 chs.
Chain Dense undergrowth on 49.40 chs
High Mountains on 80.90 chs
June 18th 1884

From the cor. to secs. 3, 4, 33 and 34, on the south boundary of Tps. established under present contract. Run North bet. secs. 33 and 34.
Va. 15° 20' E.

16.00 Ridge decends N.
19.00 Ravine drains N.
24.00 Ridge decends N.
31.00 Ravine drains N.
31.00 Ridge decends N.
40.00 Set limestone 14 x 10 x 8 ins. 9 ins. in the ground, for 1/4 sec. cor. marked 1/4 on N. face, from which
Cpine 20 ins. in diam. brs. N. 40° W. 15 lks. dist.
Cpine 8 ins. in diam. brs. S. 25 E. 10 lks. dist, each marked 1/4 S. B. T.
45.80 Ravine drs N.
52.50 Ridge decends N.
60.00 Ridge bears N. E. and S. W. Leave timber
70.00 Fence brs. S. W. about 15 chs. thence

32 Subdivision T. 27 S. R. 6 W.

Chains		Chains
	W. Enter Asays Bro's land.	
80.00	Set sandstone 15 x 12 x 8 ins. 10 ins. in the ground, for cor. to secs. 27, 28, 33 and 34, marked 3 notches on E. and 1 notch on S. edges, and raised a mound of stone alongside.	62.00
	Land, mountainous.	65.56
	Soil, 1st and 4th rate.	69.00
	Pine timber on 71.00 chs.	75.00
	High mountains on 75 chs.	79.90
	East on a random line bet secs. 27 and 34. Va. 15° 20' E.	
40.00	Set temporary 1/4 Sec Cor	
79.90	Intersect N. and S. line 30 lk S. of the cor. to secs. 26, 27, 34 and 35. Thence	7.00
	S. 89° 47' W. on a true line bet secs. 27 and 34 with same va.	9.80
6.00	Ravine drs. N. W.	25.00
15.00	Ridge decends S. W.	27.50
32.00	Ravine drs. W.	31.00
39.50	Ridge decends N. W.	32.00
39.95	Set sandstone 16 x 12 x 10 ins. 11 ins. in	34.00

Salt Lake Meridian 33

Chains	the ground, for 1/4 sec. cor. marked 1/4 on N. face, from which
	A pine 10 ins. in diam. brs. N. 30 E. 20 lks. dist.
	A pine 18 ins. in diam. brs. N. 35° W. 20 lks. dist. each marked 1/4 S. B. T.
62.00	Head of ravine drs. N. W.
63.56	A pine!
69.00	Ridge decends N. W.
75.00	Ridge course N. E. and S. W.
79.90	The cor. to secs. 27, 28, 33 and 34.
	Land, mountainous
	Soil, 4th rate.
	Scattering scrub timber on 79.40 chs.
	High Mountains on 79.90 chs
	North bet. secs. 27 and 28.
	Va. 15° 20' E.
7.00	Enter Bottom brs N. E. & S. W.
9.80	South Fork of Asays Creek 100 lks wide 3 ft. deep runs N. E.
25.00	Leave bottom brs N. E. & S. W. ascend
27.50	Ridge brs. N. E. and S. W.
31.00	Fence brs. N. E. and S. W.
	West line of Asay Bro's farm.
32.00	Road brs. N. E. and S. W.
34.00	Enter scattering timber.

34 Subdivision T. 37 S. R. 6 W.

Chains		Chains
38.00	Hollow drs. E.	
40.00	Set sandstone 15 x 10 x 7 ins. 10 ins. in the ground, for 1/4 sec. cor. marked 1/4 on W. face, from which A pine 30 ins. in diam. bs. 85° E. 115 lks. dist. marked 1/4 S. B. T. No other tree convenient to mark raised mound stone	
55.00	Foot of ledge course N. E. and S. W.	
55.50	Top of ledge	
62.50	Trail bs. N. E. and S. W.	40.00
70.00	Enter scattering timber	20.10
80.00	Set flint stone 16 x 9 x 6 ins. 11 ins. in the ground, for cor. to secs. 21, 22, 27 and 28, marked 3 notches on E. and 2 notches on S. edges, from which	8.15
	A pine 12 ins. in diam. bs. S. 37° W. 130 lks. dist., marked T. 37 S. R. 6 W. S. 28 B. T.	17.50
	A pine 18 ins. in diam. bs. N. 69° W. 100 lks. dist. marked T. 37 S. R. 6 W. S. 21 B. T.	30.00
	A cedar 8 ins. in diam. bs. N. 87° E. 12 lks. dist., marked	33.50
		37.00
		40.00

Salt Lake Meridian 35 [illegible]

Chains T. 37 S. R. 6 W. S. 22 B. T.

No other tree within limits. raised a mound of stone along side

Land, level and mountainous.

Soil, 1st and 4th rate.

Timber pine on 31. chs.

High mountains on ~~46~~ 00 chains
62.00 "

East on a random line bet. secs. 22 and 27.

Va. 15°20' E.

40.00 Set temporary 1/4 sec. cor.

80.10 Intersect N. and S. line 60 lks. S. of the cor. to secs. 22, 23, 26 and 27.

Thence

S. 89°34' W. on a true line bet. secs. 22 and 27, with same va.

8.15 Asay Creek 90 lks. wide 3 1/2 ft. deep drs. N. E.

17.50 Road brs. N. E. and S. W.

20.00 Ridge brs. N. E. Enter timber.

23.50 Top of round knoll.

27.00 Foot " " "

40.05 Set sandstone 14 x 10 x 6 ins. 9 ins. in the ground, for 1/4 sec. cor. marked 1/4 on N. face, from which

Chains	
	A pine 30 ins. in diam. brs. N. 70° E. 425 lks. dist., marked ¼ S. B. T.
	No other tree within limits.
57.00	Ravine drs. S. E.
80.10	The cor. to secs. 21, 22, 27 and 28.
	Land, mountainous
	Soil, 1st and 4th rate.
	Timber on 60 chs.
	High mountains on 80 to chs
	North bet. secs. 21 and 22. Va. 15° 20' E.
20.00	Leave timber.
25.00	Mountain ridge course N. E. and S. W.
35.00	Enter scattering timber.
40.00	Set limestone 15 x 9 x 7 ins. 10 ins. in the ground, for ¼ sec. cor. marked ¼ on W. face from which
	A pine 24 ins. in diam. brs. N. 25° W. 30 lks. dist., marked ¼ S. B. T.
	No other tree within limits. ~~therefore~~ and raised a mound of earth and stone alongside.
43.00	Ravine drs. N. E. Leave timber.
70.00	Decend mountain. Enter timber.

Salt Lake Meridian 37 [illegible]

Chains

10.00 Set sandstone 19x14x3 ins. 12 ins. in the ground, for cor. to secs. 15, 16 21 and 22, marked 3 notches on E and S. edges, from which

A pine 16 ins. in diam. brs. S. 10° E. 40° lks. dist, marked

T. 37 S. R. 6 W. S. 22 B.T.

A pine 12 ins. in diam. brs. S. 65° W. 20 lks. dist, marked

T. 37 S. R. 6 W. S. 21 B.T.

A pine 13 ins. in diam. brs. N. 70° E. 50 lks. dist, marked

T. 37 S. R. 6 W. S. 15 B.T.

No other tree within limits raised a mound of stone along side

Land, mountainous.

Soil, 4th rate.

Timber on 38 chs.

High mountains on 80.00 chains

East on a random line bet. secs. 15 and 22

Va. 15° 20' E.

40.00 Set temporary ¼ sec. cor.

[illegible].20 Intersect N. and S. line 30 lks.

Subdivision T 37 S. R 6 W.

Chains		Chains
	S. of the cor. to secs. 14, 15, 22 and 23.	
	Thence	
	S. 89° 47' W. on a true line bet. secs.	
5	15 and 22 with same va. Road bro. N W & SE	
6.00	North Fork of Asay Creek 50 lks.	
	wide 3 ft. deep drs. S. E.	4.60
8.00	Foot of hill.	16.50
15.00	Enter timber.	19.25
22.50	Ridge decends N.	
24.00	Ravine drains N.	26.50
32.00	Ridge decends N.	
38.00	Mouth of Canyon drs. N.	31.00
40.50	Set limestone 16 x 10 x 4 ins. 11 ins. in	39.00
	the ground, for 1/4 sec. cor. marked	40.00
	1/4 on N. face, from which	
	A pine 18 ins. in diam. brs. N.	
	10 lks. dist.	
	A pine 14 ins. in diam. brs. S. 85° W.	48.00
	20 lks. dist., each marked 1/4 S. B. T.	60.00
55.00	Ridge decends N. E.	80.00
62.00	Head of ravine drs. N.	
78.50	Ridge brs. N.	
80.20	The cor. to secs. 15, 16, 21 and 22.	
	Land, mountainous.	
	Soil, 1st and 4th rate	

BOOK-A-202

Salt Lake Meridian 39

Chains	
	Timber on 65.00 chs.
	High Mountains on 80.20 chs.
	June 18th 1884
	North bet. secs. 15 and 16.
	Va. 15°20' E.
4.60	A pine 1 1/4 ins dia.
16.50	Corral 100 lks. in diam. Leave timber
19.25	West Fork of Asay Creek 40 lks. wide
	3 1/2 ft. deep. drains E.
26.50	Road brs. E. and W. From this point a
	large spring drains S. E.
31.00	Small ridge brs. S. E.
37.00	Hollow drs. S. E.
40.00	Set sandstone 16 x 10 x 5 ins. 11 ins. in
	the ground, for 1/4 sec. cor. marked 1/4 on W.
	face and raised a mound of stone alongside
	From this cor. a large spring brs. S. E.
48.00	Enter timber. Foot of mountain.
60.00	Ridge decends S. W. Ravine drs. S. W.
80.00	Set sandstone 18 x 10 x 7 ins. 12 ins. in
	the ground, for 1/4 cor. to secs. 9, 10, 15 and 16,
	marked 3 notches on E. and 4 notches on
	Sedges, from which
	A pine 24 ins. in diam. brs. N. 3° W. 12
	lks. dist., marked

40 Subdivision T. 37 S. R. 6 W.

Chains	
	T. 37 S. R. 6 W. S. 9 B. T.
	A pine 18 ins. in diam. brs. S. 35° W. 15 lks. dist. marked—
	T. 37 S. R. 6 W. S. 16 B. T.
	No other tree convenient to mark.
	Land, mountainous and level.
	Soil, 1st and 4th rate.
	Scattering pine timber on 48.50 chs.
	High mountains on 80.00 chs.
	East on a random line bet. secs. 10 and 15.
	Va. 15° 20' E.
40.00	Set temporary 1/4 sec. cor.
80.40	Intersect N. and S. line 60 lks. S. of the cor. to secs. 10, 11, 14 and 15.
	Thence
	S. 89° 34' W. on a true line bet. secs. 10 and 11 with same va.
4.00	Enter timber and dense undergrowth
20.00	Ravine drs. N. E.
30.00	Ridge brs. N. E. and S. W.
40.20	Set sandstone 16 x 10 x 5 ins. 11 ins. in the ground, for 1/4 sec. cor. marked 1/4 on N. face from wh

Salt Lake Meridian. 41

Chains A pine 10 ins. in diam. brs. N. 25° W.
100 lks dist. marked 1/4 S. B. T.
No other tree within limits, ~~therefore~~ and
raised a mound of stone alongside.
47.50 Ravine drs. W. Leave timber.
60.00 Head of ravine drs. N. E.
72.00 Mountain brs. N. W. and S. E.
[illegible].00 Leave undergrowth.
80.40 The cor. to secs. 9, 10, 15 and 16.
Land, mountainous and broken.
Soil, 3rd and 4th rate.
Timber, scattering pine on 76.00 chs
Dense undergrowth service berry
and wild crab apple on 76.00 chs.
High Mountains on 80.40 chs

North bet. secs. 9 and 10.
Va. 15° 20' E.

[illegible].00 Canyon drs. S. E.
[illegible].00 Mountain ridge course N. E. and S. W.
[illegible].00 Set granite stone 14 x 10 x 8 ins. 9
ins. in the ground, for 1/4 sec.
cor. marked 1/4 on W. face, and
raised a mound of stone alongside.

42 Subdivisions T. 37 S. R. 6 W.

Chains	
43.00	Enter timber.
50.00	Ravine drs. N. W.
60.00	Ridge decends N. E.
80.00	Set limestone 16 x 10 x 7 ins. 11 ins. in the ground, for cor. to secs. 3, 4, 9 and 10, marked 5 notches on S. and 3 notches on E. edges, from which
	A pine 10 ins. in diam. brs. N. 45° E. 35 lks. dist. marked, T. 37 S. R. 6 W. S. 3 B. T.
	A pine 36 ins. in diam. brs. S. 10° E. 40 lks. dist. marked T. 37 S. R. 6 W. S. 10 B. T.
	A pine 12 ins. in diam. brs. S. 39° W. 65 lks. dist. marked T. 37 S. R. 6 W. S. 9 B. T.
	A pine 28 ins. in diam. brs. N. 36° W. 50 lks. dist. marked T. 37 S. R. 6 W. S. 4 B. T.
	Land, mountainous.
	Soil, 4th rate.
	Timber, scattering pine on 37.00 ch. High mountains on 80.00 ch.

Chains	
40.00	S
79.80	
	S
	S
20.00	R
24.00	E
31.00	I
39.90	S
	L
	1
	A
	6
	I
	L
	a
60.00	C
78.50	I
79.50	O
	A

Salt Lake Meridian 43 2 11

Chains	
	East on a random line bet. secs. 3 and 10.
	Va. 16° 15° E.
40.00	Set temporary ¼ sec. cor.
79.80	Intersect N. and S. line 30 lks. S. of the cor. to secs. 2, 3, 10 and 11.
	Thence
	S. 89° 47' W. on a true line bet. secs. 3 and 10 with same va.
20.00	Ravine drains N. E. and S. W.
24.00	Enter timber.
31.00	Ridge brs. N.
39.90	Set limestone 14 x 10 x 8 ins. 9 ins. in the ground, for ¼ sec. cor. marked ¼ on N. face, ~~from~~ which
	A pine 7 ins. in diam. brs. N. 45° E. 60 lks. dist., marked ¼ S. B. T.
	No other tree convenient to mark; ~~therefore~~ and raised a mound of earth and stone alongside.
60.00	Canyon drains N.
78.50	Ridge decends N.
79.80	The cor. to secs. 3, 4, 9 and 10.
	Land, mountainous.

44 Subdivisions T. 37 S. R. 6 W.

Chains Soil, 4 rate

Scattering pine timber on 55.80 chs.

Dense undergrowth service berry and wild crab apple on 79.80 chs.

High mountains on 79.80 chs

Moth on a random line bet. secs. 3 and 4.

Va. 15° 20' E.

40.00 Set temporary 1/4 sec. cor.

80.75 Intersect N. boundary of Tp. 60 lks. W. of the cor to secs. 3, 4, 33 and 34 which is a volcanic stone 18 x 10 x 10 in. firmly set in the ground, marked 3 notches on E. and W. edges, from which Amer. pine 12 ins. in diam. br. N. 13 1/2 E. 55 lks. dist, marked

T. 36 S. R. 6 W. S. 34 B. T.

A cedar 8 ins. in diam. br. N. 18° W. 31 lks. dist, marked

T. 36 S. R. 6 W. S. 33 B. T.

A cedar 4 ins. in diam. br. S. 85° E. 5 lks. dist, marked

T. 37 S. R. 6 W. S. 3, B. T.

Chains A pine 10 ins in diam brs. S. 70° W.
27 lks. dist, marked
T. 37 S. R. 6 W. S. 4 B. T.
Thence
S. 0° 26' W. on a true line bet. secs.
3 and 4, with same va.
22.00 Foot of mountain Leave scattering timber.
40.00 Set cobble stone 15 x 12 x 6 ins. 10 ins. in
the ground, for 1/4 sec. cor. marked
1/4 on W. face, and raised a mound
of earth and stone alongside.
51.00 Foot of ridge
52.00 Road brs. E. and W.
60.00 South bank of Mammoth
Creek 50 lks. wide 3 ft. deep drs. E.
80.75 The cor. to secs. 3, 4, 9 and 10.
Land, mountainous.
Soil, 3rd and 4th rate.
Timber, scattering pine on 35.00 chs.
High mountains on 80.75 chs.

From the cor. to secs. 4, 5, 32 and
33. on the south boundary of Tp.
established under present contract.
Irun N. betw. sec. 32 & 33. V. 15.20.

46 Subdivision T 37 S. R 6 W

Chains	
10.00	Ravine drains W.
13.00	Ridge brs. E and W.
25.70	South Fork of Asays Creek 75 lks wide 2½ ft deep drs. N 50° E. Leave timber. Enter willows.
	From this point a large spring br. N.E. 12.00 chs. dist. drs. N. E. Jerome Asays' brs. S. W. about 16 chs. and N. E. about 50 chs.
35.65	Water ditch drs. N. E. W. line of Jerome Asays farm. Leave willows
35.78	Enter timber. mountain brs. N. E. and S. W.
40.00	Set volcanic stone 15 x 14 x 4 ins. 10 ins. in the ground, for ¼ sec. co. marked ¼ on W. face, from which A pine 24 ins. in diam. brs. N. 10° W. 8 lks. dist., marked ¼ S. B. T. A pine 14 ins. in diam. brs. N. 25° E. 60 lks. dist. marked ¼ S. B. T.
45.00	Ridge decends S. E.
65.00	Ravine drains S. E.
69.00	Top of ridge decends E.
80.00	Set volcanic stone 16 x 14 x 10 ins.

Salt Lake Meridian 47 2 1

Chains 11 ins. in the ground, for cor. to secs 27, 28, 33 and 34, marked 3 notches on E. and 1 notch on S. edges, from which

A pine 9 ins. in diam. brs. S. 69° W. 100 lks. dist., marked—

Tp. 37 S. R. 6 W. S. 32 B. T.

A pine 16 ins. in diam. brs. N. 15° W. 75 lks. dist., marked—

T. 37 S. R. 6 W. S. 29 B. T.

A pine 18 ins. in diam. brs. S. 82° E. 125 lks. dist., marked—

T. 37 S. R. 6 W. S. 33 B. T.

A pine 20 ins. in diam. brs. N. 60° E. 200 lks. dist., marked

T. 37 S. R. 6 W. S. 28 B. T.

Land, mountainous.

Soil, 1st and 4th rate.

Timber Pine, 70.00 chs.

Willows on 10.00 chs.

High mountains on 80.00 chs.

East on a random line bet. secs 28 and 33.

Va. 15° 20' E.

Blank

Page

Blank

Page

Blank

Page

Blank

Page

Blank

Page

Blank

Page

Salt Lake Meridian.

lks dist marked T. 38 S. R. 5 W.
S. 36. B. T.
a pine 14 ins dia. brs. S. 80° E. 8 lks
dist marked T. 39 S. R. 4 W. S. 6 B. T.
and a mound of stone alongside
thence
S. 39° 54' W. on a true line betw
secs. 1 & 36
Va. 16° 00 E
Over high mountain through
heavy timber.
27.50 High mountain the rim of the
great basin brs. N W. & S E.
35.00 Ravine drs. S E.
40.00 Set a volcanic stone 14 x 12 x 4 ins
9 ins in ground for 1/4 sec. cor.
marked 1/4 on N. face from which
a pine 30" dia. brs. S. 10 W. 10 lks
dist, marked 1/4 S. B. T.
No other tree convenient to mark
raised a mound of stone alongside
52.00. Spur of ridge descends S E.
80.00. Set a volcanic stone 14 x 10 x 6 ins
8 ins in the ground for the cor.

to secs. 1. 2. 35 & 36, from which
a fir 6 ins diam. brs. N. 20° E. 14
lks dist, marked T. 38 S. R.
5 W. S. 36. B. T.
a fir 5 ins dia. brs S. 10° E
15 lks dist, marked T 39. S.
R. 5. W. S. 1. B. T.
No other tree convenient to mo
raised a mound of stone
alongside.
Land, high mountain
Soil, 3d & 4th rate.
Timber, scattering pine and f
Dense undergrowth bitter brush
on 80.00 chs.

S. 89° 54' W. on a true line betw
secs. 2 & 35.
Va. 16° 00' E.

Descend.
30.00 Top of Sink Cliff brs. N. 2° E
and S. 52° W.
35.00 Foot of Sink Cliff 150. below
top.

Salt Lake Meridian

40.00 Set sandstone 15x6x5 ins, 9 ins in ground for 1/4 sec. cor., marked 1/4 on N. face, from which an aspen 3" dia. bears S. 10° W. 15 lks dist. marked 1/4 S. B.T. No other tree convenient to mark. raised a mound of stone alongside

60.00 Head of cañon drs N.W.

75.00 Leave timber bears N. & S.

80.00 Set sandstone 16x14x4 ins 11 ins in ground for cor. to secs. 2.3.34 & 35. marked with 2 notches E. & 4 W. edges raised a mound of earth & stone alongside.

Land, high mountains.

Soil, rocky 4th rate.

Heavy timber on 75.00 chs

High mountains on 80.00 chs

S. 89° 54' W. on a true line between secs. 3 & 34.

Va. 15° 30' E.

Descend mountains through brush.

South B'dy T. 38. S. R. 5 W.

1.25. Sharp ridge descends N. W. joins Main Mountain about 15 chs. S. E.

40.00 Set a sandstone 14×9×3 ins, 9 ins in ground for 1/4 sec. cor., marked 1/4 on N. face and raised a mound of earth and stone alongside

75.00 Foot of mountain enter Cañon.

80.00. Set a gray sand stone 16×12×6 ins 10 ins in ground, marked 3 notches on E & W. edges for the cor. to secs 3. 4. 33 & 34., and raised a mound of earth and stone alongside

Land, high mountain.

Soil, 2d & 3d rate

Dense undergrowth, choke cherry and cerris berry on 80.00 chs

Mountainous on 80.00 chs.

South 89° 54' W. on a true line betw. secs. 4 & 33.

Va. 15° 45' E

3.00 Ridge descends S.

Salt Lake Meridian

8.00. Hollow drs S.
14.00 Ridge descending S.
20.00. Ravine drs. S
37.00. Hollow drs S.
40.00 Spur of ridge descends S.
set a sandstone 19x10x4 ins.
14 ins in ground for 1/4 sec. cor
marked 1/4 on E. face, and
raised a mound of earth
and stone alongside.
43.00. Hollow drs S.
57.00 Ridge descends S.
60.00 Foot of main ridge leave
broken spurs.
61.50. Cañon run, brs. N W & S E.
71.00 Fence across cañon
brs. N E & S W.
80.00 Find old corner nearly de-
cayed reestablish same
by setting sand stone
14x12x6 ins, 3 ins in
ground for reestablished
cor. to Secs. 4. 5. 32 & 33.
marked 4 notches 6. and 2.

South B'dy T. 38 S. R. 5 W

notches W. edges and raised a mound of earth and sto[illegible] alongside.
Land, high mountain & cañon
Soil, 1st & 3d rate
Dense undergrowth on 80.00
Mountainous on 80.00 chs

S. 89° 54' W. on a true resurvey line betw. secs. 5 & 32.
Va. 15° 45' E.

20.00 Water ditch runs S.W.
24.60 Wood road brs. S.W. & N.
35.50 Upper Kanab Creek runs S.
38.00 Hill about 30 ft high.
40.00 Old cor. down, set a sand sto[illegible] 30x18x6 ins 22 ins in ground for 1/4 sec. cor. reestablished [illegible] Red. 1/4 on N. face and raised [illegible] mound of stone alongside, from which
a house brs S. 57° W. about 10 chs dist
corrals, barn &c. N. E. of hous

BOOK-A-202

Salt Lake Meridian.

47.75. Fence brs. S. E & N.W. about 4 chs., thence N. 5° W.

47.80 Water ditch 10 lks wide runs SW

54.00 Ridge brs N. & S. Enter scrub cedars, ascend.

55.70 Ridge descends S. pasture fence brs N & S.

75.00 Leave scrub cedars brs N & S.

80.00. Old cor. is down and mis placed reset same a sandstone 16x12x10 ins 11 ins in ground for reestablished cor. to secs 5. 6. 31 & 32, marked with 5 notches on E. & 1 on W. edges, dug pits. 18x18x12 ins in each sec. 5½ ft dist. and raised a mound of earth alongside.

Land, gently rolling

Soil 1st & 3d rate.

Timber scrub cedar on 21 chs.

Dense undergrowth, oak, service berry, chokecherry and sage brush on 80.00 chs.

South Bdy T. 38. S. R. 5 W.

S. 89° 54' W. on true meaney line betw. Secs. 6 & 31.
Va. 15° 45' E.

27.50 Ridge about 200 ft above cor. descends N. W.

35.00 Ravine drs. S & E.

40.00 Set trachyte stone 14x12x4 ins 9 in ground for re-established 1/4 sec. cor. marked 1/4 on N. face from which
a pine 30" diam. bears S. 10° W. 10 lks dis
No other tree convenient to mark
raised a mound of stone alongside

52.00 Ridge descends S & E.

80.50 The cor. to Tps. 38 & 39 S. Rs. 5 & 6 W., which is a conglomerate rock 20x10x8 ins firmly set in the ground, marked 6 notches on N. S. and W. edges with a mound of stone alongside.
Land, rolling
Soil, 1st Lite.
Dense undergrowth oak, beech on 80.00
Scattering timber on 80.50 chs
May 13. 1884.

BOOK-A-202

Salt Lake Meridian.

ft. below top brs N. & S.

72.00. Ravine at foot of precipitous descent drs. S.W.

78.00. Ridge descends S.

80.00. Set a sandstone 15x8x8 ins 10 ins in the ground for the cor. to secs. 1. 2. 35 & 36 marked 1 notch E. & 5 on W. edges.

from which

an aspen 4" dia. brs. S. 75° E. 40 lks dist. marked T. 38 S. R. 5 W S. 1. B. T.

There is no other tree convenient to mark, raised a mound of stone alongside.

Land, high mountain.

Soil, rocky 1st & 4th rate.

Dense undergrowth, oak on 80.00 ch.

S. 89° 45' W. on true line betw. secs. 2 & 35.

Va. 15° 40' E.

17.00. Large cañon drs. N. 65° W.

20.00. Ridge descends N.

25.00 Ravine drains N.

North B'dy T. 38 S. R. 5 W

40.00. Ridge about 200 ft. above ravine descends N., set a sandstone 14x10x4 ins, 8 ins ground for 1/4 sec. cor., mark 1/4 on N. face, from which a fir 4" dia. brs. N. 7° E. 7 lks a a " 10" " " S. 7° W. 10 " " each marked 1/4. S. B. T.

50.00 Rocky ravine drs. N.

65.00 Ridge descends N.

66.50 Ravine drs. N.

78.50 Ridge descends N.

80.00 Set a sandstone 30x8x4 ins 24 in in ground for the cor. to secs. 2. 3 34, 35, marked 2 notches on E. and 4. on W. edges, from which a fir 8" dia. brs. S. 85° W. 6 lks dist marked T. 38 S. R. 5 W. Sec. 3. B. T. a fir 10" diam. brs. S. 80° E. 30. lks dist, marked T. 38 S. R. 5. W. S. 2. B. T.

No other tree convenient to mark and raised a mound of stone alongside

Salt Lake Meridian.

Land, high broken mountains
Soil, 4th rate.
Heavy pine timber, and dense
oak and aspen undergrowth
on 80.00 chs.
Mountainous on 80.00 chs.

S. 89° 45' W. on a true line
between secs. 3 & 34.
Va. 15° 40' E.
6.00 Narrow rocky ravine
drs. N.
16.00 Mountain about 300 ft above
ravine descend abruptly.
37.00 Foot of rocky ridge brs N. & S.
40.00 Set a sandstone 16x12x6 ins, 11 ins
in ground for 1/4 sec. cor.
marked 1/4 on N. face, from which
a pine 9" dia. brs S. 45° E 30 lks dist.
marked 1/4 S.B.T.
No other tree convenient to mark,
raised a mound of stone
alongside.

North B'dy T. 38 S. R. 5 W.

57.50. Narrow deep cañon drs. N. 60° W. about 2000 ft below ridge
59.00. Ridge descends N.W.
68.50 Descent not so steep.
80.00. Set a sand stone 14x10x6 ins 8 ins in ground for the cor. to secs. 3. 4. 33 & 34, marked 3 notches on the East and West edges from which
a pine 14" dia. brs. S. 63° W. 70 lks dist, marked T. 38. S. R. 5 W. S. 4. B. T.
a pine 16" dia. brs. N. 58° W. 50. lks dist, marked T. 37. S. R. 5 W. S. 33. B. T.
a pine 26" dia. brs. N. 73° E. 60 lks dist, marked T. 37 S. R. 5 W. S. 34. B. T. and raised a mound of stone alongside
Land, high mountainous & broken
Soil, 1st & 4th rate.
Timber, scattering pine
Dense oak, cerrisberry and aspen
undergrowth on 80. 00 chs.

Salt

S. 89°
le
39.30. Leav
40.00. Set s
in g
mar
a pin
di
a pin
each
A h
abou
50.50 Roa
52.00 Roa
W. &
57.50 Ria
79.40. Tra
80.00 Set
10" in
& 33
2 no
raise
ston

Salt Lake Meridian.

S. 89° 45' W. on a true line
betw. secs. 4 & 33.
Va. 15° 40' W.

39.30. Leave timber brs. N. & S.

40.00. Set sandstone 17x10x8 ins 11 ins
in ground for 1/4 sec. cor.,
marked 1/4 on N. face from which
a pine 14" dia. brs. N. 16° E. 60 lks.
dist.
a pine 20" dia. brs. S. 72° E 100 lks dist
each marked 1/4 S. B. T.
A house and corral brs. N 39° W.
about 35 chs. dist.

50.50 Road brs S. 40° E and N. 40° W.

52.00 Road in bottom of hollow brs N.
W. & S. E. hollow drs N. W.

57.50 Ridge descends N. W.

79.40. Trail brs. N. W. & S. E.

80.00 Set a sandstone 15x12x4 ins
10" in ground for cor. to sec. 4.5.32
& 33, marked 4 notches E. and
2 notches on W. edges, and
raised a mound of earth and
stone alongside.

North Bdy T. 38 S. R. 5 W.

Land rolling high mountain and rough.
Timber pine on 39.00 chs.
Dense undergrowth oak and sage on 80.00 chs.

S. 89° 45' W. on a true line between secs. 5 & 32.
Va. 15° 40' E.

40.00 Set a sandstone 15 x 10 x 4 ins 10 ins in ground for 1/4 sec. c. marked 1/4 on N. face, and raised a mound of earth and stones alongside.

45.00 Top of ridge descends N. 65° W. Enter cedar timber.

52.00 Leave cedar bra. N. W. & S. E.

55.50 Wash 4 ft deep 25 lks wide in hollow drg N. W.

64.75 Spring branch runs N. W., heads about 10 chs. S. E. a spring good water.

80.00 Find original cor. down,

Salt Lake Meridian.

sand stone 16x10x8 ins, re-
established, 11 ins in ground
for the reestablished cor.
to secs. 5.6.31 & 32, raised
a mound of earth and
stone alongside.
Land rolling.
Soil, 1st rate.
Cedar timber on
7.00 chs.
Dense undergrowth oak
and sagebrush on
80.00 chs.

S. 89° 45' W. on a true resurvey
line between secs. 6 & 31
Va. 15° 45' E.

7.00. Ridge about 70 ft high
11.00. Ravine about 60 ft.
below ridge, drs.
N. W.
17.00. Ridge about 125 ft.
above hollow.
40.00. Found old cor. down

North Bdy T. 38 S. R. 5 W.

reset same, a stone 14x10x6 in
gins in ground for reestablish
1/4 sec. cor., marked 1/4 on
N. face, and raised a
mound of earth and stone
alongside.

40.25. Road bears N.W. & S.E.
About one mile to
Harris sheep camp.

40.50 Hollow drs N.W.

50.00. Ridge about 75 ft
above hollow descends
N.W.

78.00 Hollow drs N.W.

80.00 The cor. to Tps. 37 & 38 S.
Rs. 5 & 6 W., which is a
sandstone 15x14x6 ins
10 inches in the ground
marked 6 notches on
N. S. E. & W. edges with
a mound of stone
alongside.
Land, rolling.
Soil, 2d rate.

Dense undergrowth, oak and sagebrush on 80.00 chs.
May 14th 1884

For General Description see subdivision notes.

Shadrach N Richardson
U. S. Dep. Surveyor.

Blank

Page

Blank

Page

BOOK-A-202

Township 38 S R. 5 W.

329	328	327	325	323	322
6 394	5 377	4 363	3 350	2 348	1
393	392	376	362	347	
7 391	8 375	9 362	10 346	11	12
390	389	374	361	346	
18 388	17 373	16 359	15 344	14	13
387	386	371	358	344	
19 385	20 370	21 357	22 343	23	24
384	383	369	356	342	
30 382	29 368	28 355	27 340	26	25
381	379	367	354	339	
31 378	32 364	33 351	34 338	35 337	36
320	318	316	315	314	313

20 Subdivision T. 38 S. R. 5 W.

Chains	
	alongside.
75.00	Perpendicular ledge about 50 ft. high.
80.00	Set sandstone 30 × 15 × 12 ins. 25 ins. in the ground, for cor. to secs. 21, 22, 27 and 28, marked 3 notches on E. and 2 notches on S. edges, and raised a mound of earth and stone alongside. Land, mountainous. Soil, 2nd and 3rd rate. Dense oak and ~~[illegible]~~ cerris berry brush on 80 chs. High mountains on 80 chs.
	East on a random line bet. secs. 22 and 27. Va. 15°20' E.
40.00	Set temporary 1/4 sec. cor.
80.78	Intersect N. and S. line 58 lks. S. of the cor. to secs. 22, 23, 26 and 27. Thence S. 89°35' W. on a true line bet. secs. 22 and 27 with same va.

Salt Lake Meridian 27

Chains	
5.00	Ridge about 1500 ft. above Creek brs. N.W. and S.E.
0.00	Short Cañon brs. N. and S.
0.39	Left hand canyon about 1,000 ft. below ridge. Set sandstone 15 x 15 x 5 ins 10 ins. in the ground, for 1/4 sec. cor. marked 1/4 on N. face, and raised a mound of earth & stone alongside.
8.00	Left hand canyon brs. N.W. and S.E.
0.78	The cor. to secs. 21, 22, 27 and 28.
	Land, rough and mountainous
	Soil, 2nd and 4th rate.
	Scattering timber.
	High mountains on 80.78 chs.
	North bet. secs. 21 and 22.
	Va. 15°20' E.
0.00	Set sandstone 16 x 12 x 14 ins. 11 ins. in the ground, for 1/4 sec. cor. marked 1/4 on W. face, and raised a mound of earth and stone alongside. Short Cañon 2 chs.

22 Subdivision T 30 S R 5 W

Chains	
	E. chs. S.
54.80	Perpendicular cliff about 100 ft high
56.50	Top of high steep ridge east of cliff bs. E. and W.
66.00	Enter pine and quaking asp timber
80.00	Set sandstone 14 x 12 x 4 ins. 9 ins. in the ground, for cor. to secs. 15, 16, 21 and 22, marked 3 notches on E. and S edges, and raised a mound of earth and stone alongside.
	No bearing trees within limits
	Land, rolling and mountainous
	Soil, 1st and 3rd rat.
	Pine and quaking asp on 14 chs.
	Dense oak and ~~scrub~~ cedar berry on 80 chs.
	High mountains on 80 chs.
	East on a random line bet. secs. 15 and 22.
	Va. 15°20' E
40.00	Set temporary 1/4 sec. cor.
79.85	Intersect No. and So. line 60 lks. N. of the cor. to secs. 14, 15, 22 and 23

BOOK-A-202

Chains	Thence
	Hc 89°34' W on a true line bet. secs. 15 and 22 with same va.
6.00	Ravine drs. N. W. heads S. E about 10 chs.
9.92	A quaking asp 3 ins. in diam. for 1/4 sec. cor. marked 1/4 on Hc. face, from which
	A quaking asp 6 ins. in diam. brs. brs. N. 57° W. 80 lks. dist,
	A quaking asp 9 ins. in diam. brs. S. 77° W 68 lks. dist, each marked 1/4 S. B. T.
5.00	Top of high ridge brs. Hc. W. and S. E.
8.50	Perpendicular cliff brs. N. W. and S.
6.50	Trail in Canyon drs. Hc. about 20 lks. dist.
9.85	The cor. to secs. 15, 16, 21 and 22.
	Land, broken and mountainous
	Soil, 3rd rate.
	Timber Scattering Pine & Aspen on 79.85 ch.
	High mountains on 79.85 chs.
	North bet. secs. 15 and 16.
	Va. 15°20' E
1.50	Trail in deep canyon drs. N. W.

24 Subdivision T. 38 S. R. 5 W.

Chains	Leave quaking asp and pine.
25.00	Enter pine.
40.00	Set limestone 20 x 12 x 14 ins. 15 ins. in the ground, for 1/4 sec. cor. marked 1/4 on W. face, and raised a mound of earth and stone along side.
49.50	Ravine dr. S. W.
80.00	Set sandstone 40 x 36 x 20 ins. 30 ins. in the ground for cor. to secs. 9, 10, 15 and 16, marked 4 notches on S. and 3 notches on E. edges, from which
	A balsam 10 ins. in diam. br. S. 54° E. 16.0 lks. dist., marked T. 38 S. R. 5 W. S. 15 B. T.
	A balsam 6 ins. in diam. br. N. 74° E. 40 lks. dist., marked T. 38 S. R. 5 W. S. 10 B. T.
	A balsam 12 ins. in diam. br. N. 45° W. 60 lks. dist., marked T. 38 S. R. 5 W. S. 9 B. T.
	A pine 24 ins. in diam. br. S. 55° W. 72 lks. dist., marked T. 38 S. R. 5 W. S. 16 B. T.

BOOK-A-202

Thence Land, mountainous and broken.
Soil, 1st and 3rd rate.
Pine quaking asp and oak timber
Service berry and grass. ow 75. cls.
High mountains on 80.00 chs.

East bet. secs. 10 and 15.
Va. 15° 20' E.

40.00 Set temporary 1/4 sec. cor.
79.90 Intersect N. and S. line 28 lks. S. of the cor. to secs. 10, 11, 14 and 15.

Thence
S. 89° 48' W. on a true line bet. secs. 10 and 15, with same va.

22.75 Set sandstone 14 x 12 x 6 ins. 9 ins. in the ground, for 1/4 sec. cor. marked 1/4 on N. face, and raised a mound of earth and stone alongside.

79.90 The cor. to secs. 9, 10, 15 and 16.
Land, broken and hilly.
Soil, 3rd and 4th rate.
Scattering timber.
High mountains on 79.90.

26 Subdivision T 38 S R 5 W

Chains	
	North bet. secs. 9 and 10.
	Va. 15°20' E.
10.00	Ridge about 200 ft. high brs. S. E. and W.
25.00	Ravine drs. N. W. and S. E.
40.00	Set sandstone 14 x 14 x 9 ins. 9 ins. in the ground, for 1/4 sec. cor. marked 1/4 on W. face, and raised a mound of earth and stone alongside.
60.00	Top of ridge about 250 ft. high course N. W. and S. E.
80.00	Set gray sandstone 15 x 10 x 5 ins. 10 ins. in the ground, for cor. to secs. 3, 4, 9 and 10, marked 5 notches on S. and 3 notches on E. edges, and raised a mound of earth and stone alongside.
	Land, mountainous.
	Soil, 3rd rate.
	Scattering timber.
	High mountains on 80 chs.
	East on a random line bet. secs. 3 and 10.

BOOK-A-202

Salt Lake Meridian

37

Chains

Va. 15°20' E

40.00 Set temporary 1/4 sec. cor.

10.74 Intersect N. and S. line 35 lks.

N. of the cor. to secs. 2, 3, 10 and 11.

Thence

N. 89°45' W. on a true line bet. secs.

3 and 10 with same va.

40.37 Set sandstone 14 x 10 x 3 ins. 9 ins.

in the ground, for 1/4 sec. cor., marked 1/4 on W. face and

raised a mound of earth and

stone alongside. Ht. o bearing trees

within limits.

10.74 The cor. to secs. 3, 4, 9 and 10.

Land level and rolling.

Soil, 2nd and 3rd rate.

Heavy timber oak, pine and aspen

on 8.00 ~~74~~ chs.

North on a random line bet.

secs. 3 and 4.

Va. 15°20' E.

40.00 Set temporary 1/4 sec. cor.

80.00 Intersect Ht. boundary of Tp. 78 lks.

E. of the cor. to secs. 3, 4, 33 and 34.

2 28 Subdivision T. 38 S. R. 5 W.

Chains	
	re-established by ~~myself~~ me under present contract.
	Thence
	S. 0° 33' E. on a true line bet. secs. 3 and 4, with same va.
40.00	Set sandstone 15 x 12 x 7 ins. 10 ins in the ground, for 1/4 sec. cor. marked 1/4 on W. face, dug pits 18 x 18 x 12 ins. N. and S. of stone 5 1/2 ft. dist., and raised a mound of earth 1 1/2 ft. high, 3 1/2 ft. base alongside.
80.00	The cor. to secs. 3, 4, 33 and 34.
	Land broken Mountain
	Soil, rocky 3rd rate.
	Scattering Timber, Pine & quakingash
	8000 chs
	High mountains on 8000 chs.
	May 17. 1881
	From the cor. to secs. 4, 5, 32 and 33 on the south boundary of Township, established under present contract.
	Irun
	North bet. secs. 32 and 33

BOOK-A-202

Chains

Va. 15° 30' E.

Over meadow lands through willows

From this point Erastus Snows house bs. N. 22° 15' E.

2.18 Road bs. S. E. and N. W.

4.25 Road bs. E. and W. Leave willows

Enter cultivated land.

1.35 Irrigating ditch drs. S.W. Leave cultivated field Enter meadow

3.15 Kanab Cr. 15 lks. wide 3 ins. deep drs. S. W.

4.15 Fence bs. E. and W.

4.75 Ditch 10 lks. wide 6 ins. deep drs. S. W.

5.00 Spring Mineral water.

5.50 Trail bs. N. E. and S. W. Leave meadow and ascend mountain through brush.

15.00 From this point Erastus Snows house bs. N. 52° E. A fence about 10 chs. from this house bs. E. and W. Enter cedars.

15.00 Sandstone ledge about 9 ft. high bs. S. E.

16.25 Ridge decends N. E.

30. Subdivision T. 38 S. R. 5 W.

Chains	
40.00	Set sandstone 14 x 12 x 3 ins. 9 ins. in the ground, for 1/4 sec. cor. marked 1/4 on on W. face, from which A nut pine 16 ins. in diam. br. S. 30° W. E. 100 lks. dist, A cedar 10 ins. in diam. br. N. 20° W. 200 lks. dist, each marked 1/4 S. B. T.
41.00	Bottom of ravine drs. W.
44.70	Sandstone ridge about 20 ft. high. brs. E. and W.
54.50	Ridge about 400 ft. above bot. decends S. E.
62.50	Hollow drs. E.
70.50	Spur of ridge about 40 ft. above bot. decends E. 5 chs. to juncture of hollows.
80.00	Set sandstone boulders, 8 ft. long ft. high, 5 ft. wide for cor. to secs. 28, 29, 32 and 33, marked 4 notches on E and 1 notch on S. edges from which A red pine 18 ins. in diam. br. N. 40° E. 35 lks. dist, marked T. 38 S. R. 5 W. S. 28 B. T.

BOOK-A-202

Salt Lake Meridian

Chains Co red cedar 6 ins. in diam. brs. S. 50°
E. 35 lks. dist, marked
T. 38 S. R. 5 W. S. 33 B.T.
Co cedar 9 ins. in diam. brs. No. 24½° W.
50 lks. dist, marked
T. 38 S. R. 5 W. S. 27 B.T.
Co fir tree 8 ins. in diam. brs. S. 64° W.
72 lks. dist, marked
T. 38 S. R. 5 W. S. 32 B.T.
Land, level valley 1/4 of a mile, mountainous 3/4 of mile.
Soil, 3rd rate.
Timber, cedars & nut pine on 48.50 chs.
Dense undergrowth oak brush on
48.50 chs.
High mountains on 23.50 chs.

East on a random line bet.
secs. 28 and 33.
Va. 15°30' E.
40.00 Set temporary 1/4 sec. cor.
40.70 Intersect No. and S. line 75 lks.
S. of the cor. to secs. 27, 28, 33 and 34.
Thence

2 32 Subdivision T. 38 S. R. 5 W.

Chains	
	S. 89° 28' W. on a true line bet. secs. 31 and 33 with same ra.
5.00	Ridge about 100 ft. high brs. N. E. & S. W.
20.00	Mountain about 2,000 ft. high brs. S. W. & N. E.
40.00	Reservoir Canon brs. N. & S.
40.35	Set sandstone 15x10x8 ins. 10 ins. in the ground, for 1/4 sec. cor. marked 1/4 on N. face, and raised a mound of earth and stone alongside.
46.00	Cattle trail brs. N. and S.
49.00	Wash dry. S.
60.00	Ridge brs. " N. & S.
75.00	Wash dry " " S. E.
80.70	The cor. to secs. 28, 29, 32 & 33.
	Land high and mountainous.
	Soil, 3rd rate.
	High mountains on 80.70 ch.
	North bet. secs. 28 and 29.
	Va. 15° 20' E.
1.50	Head of canon drs. S. E.
20.00	High rocky ridge descends

Salt Lake Meridian 335

Chains S. E.

00.00 Set limestone 18 x 10 x 6 ins. 12 ins. in the ground for 1/4 sec. cor. marked 1/4 on W. face, and raised a mound of earth and stone alongside.

00 Set sandstone 24 x 15 x 4 ins. 18 ins. in the ground for cor. to secs. 20, 21, 28 & 29, marked 4 notches on E. and 2 notches on S. edges, and raised a mound of stone alongside.

Land, high mountain.

Soil 2nd and 3rd rate.

Dense oak and service berry on 80.00 chs.

High Mountains on 80 chs.

East on a random line bet. secs. 21 and 28.

Va. 15° 20' E.

00.00 Set temporary 1/4 sec. cor.

30 Intersect N. and S. line 50 lks. N. of the cor. to secs. 21, 22, 27, & 28.

34. Subdivision T. 38 S. R. 5 W.

Chains	Thence.
	N. 89°39' W. on a true line bet secs. 21 and 28, with same va.
6.00	Ridge brs. N. & S.
32.70	Trail in cañon drs. S. W.
40.15	Set sandstone 16×12×3 ins. 11 ins. in the ground for 1/4 sec. cor. marked 1/4 on N. face, and raised a mound of earth and stone alongside.
40.45	Ridge decends S.
72.00	Canyon drs. S.
80.30	The cor. to secs. 20, 21, 28, & 29. Land, high mountain ridge. Soil, 1st and 3rd rate. Dense undergrowth oak and ~~service~~ cerris-berry on 80.30 chs. High Mountains on 80.30 chs.
	North bet. secs. 20 and 21. Va. 15°20' E.
7.70	Hollow drains S. E.
29.00	Spur of ridge decends E.
38.00	Head of ravine drs. E.

Salt Lake Meridian. 36

Chains.

40.00 Set sandstone 28 × 8 × 4 ins. 19 ins in the ground for 1/4 sec. cor. marked 1/4 on W. face and raised a mound of earth and stone alongside

43.50 Enter pine and quaking asp.

47.50 High divide brs. N. E. & W.

75.50 Leave Timber

77.50 Trail in caynon. drs. N. W.

80.00 Set sandstone 20 × 12 × 4 ins 15 ins. in the ground, for cor. to secs. 16, 17, 20, & 21, marked 3 notches on S. and 4 notches on E. edges and raised a mound of stone alongside.

Land, high mountainous

Soil 1st and 3rd rate.

Dense undergrowth oak & ~~cem~~ cemiceberry

Pine and quaking asp on 32.00 chs.

Mountainous on 80.00 chs.

East on a random line bet. secs. 16 and 21.

Va. 15° 20' E.

40.00 Set temporary 1/4 sec. cor.

36. Subdivision T. 38 S. R. 5 W.

Chains	
80.60	Interest N. and S. line 25 lks. N. of the cor. to secs. 15. 16, 21 & 22
	Thence.
	N. 89° 49' W. on a true line bet secs. 16 and 21, with same va
5.50	Ravine drs N.
16.00	Ridge decends N. about 6 chs to cañon
34.00	Canyon drs. N.
37.50	Leave Timber.
40.30	Set sandstone 14 x 8 x 4 ins. 9 ins in the ground, for 1/4 sec. cor, marked 1/4 on N. face, and raised a mound of earth and stone alongside.
42.50	Ridge brs. N. W. & S. E.
80.60	The cor. to secs. 16, 17, 20 and 21
	Land, mountainous.
	Soil 3rd and 4th rate
	Timber Pine & Quackingasp on 43.10.
	High mountain on 80.60 chs

Salt Lake Meridian

Chains North bet. secs 16 and 17.
Va. 15°20' E.

6.50 Enter pine timber.
19.00 Ridge brs E. and W.
40.00 Set charred stake 4 ft. long 4 ins sq. 24 ins. in the ground for 1/4 secs. cor. marked 1/4 on W. face from which.
A pine 10 ins. in diam. brs. N 80° E. 30 lks. dist.
A pine 10 ins. in diam. brs. N. 32° E. 130 lks. dist. each marked 1/4 S. B. T.
49.00 Ravine drs. W.
80.00 Set limestone 18 x 12 x 6 ins 12" in in the ground, for cor. to secs. 8, 9, 16, and 17 marked with notches on S. and E. edges, from which A pine 20 ins. in diam brs. N. 79 1/2 E. 120 lks. dist. marked
T. 38 S R. 5 W. S. 9 B. T.
A pine 24 ins in diam. brs. S 36 1/2° E 130 lks. dist. marked
T. 38 S. R. 5 W. S. 16 B. T.

38 Subdivision T. 38 R. 5 W.

Chains	A pine 14 ins. in diam. brs.
	S. 30° W. 98 lks. dist. marked
	T. 38 S. R. 5 W. S. 17 B. T.
	a pine 22" diam. bears N. 26½ W. 130 lks. dist. marked
	T. 38 S. R. 5 W. S. 17 B. T.
	Land mountainous.
	Soil, 1st and 3rd rate.
	Timber, scattering pine on 64.00
	chs.
	Dense undergrowth oak,
	cervisebery and aspen. 80.00 chs.
	High Mountains on 80.00 chs.
	East on a random line bet.
	secs. 9 and 16
	Va 15°20 E.
40.00	Set temporary ¼ sec. cor.
80.00	Intersect N. and S. line 57 lks.
	N.
	of the cor. to secs. 9, 10, 15 and 16
	Thence.
	N. 89°36 W. on a true line bet.
	secs.
	9 and 16 with same va.
21.00	Spur of ridge decends S.
40.00	Set sandstone 30×8×8 ins. 26

Salt Lake Meridian 39

Chains in the ground, for 1/4 sec. cor. marked 1/4 on N. face and raised a mound of earth and stone alongside

57.50 Wash in canyon drs. N.W.

~~58.50~~ Lose N & S.

80.00 The cor. to secs. 8, 9, 16, and 17

Land, high mountains.

Soil 2nd and 4th rate

Dense undergrowth oak service berry and aspen on 80 chs.

Timber, scattering pines.

High Mountains on 80.00 chs.

North bet secs. 8 and 9.

Va. 15°30 E.

5.00 Ridge about 500 ft. high. brs. N.W. & S.E.

40.00 Set sandstone 15×10×4 ins 10 ins. in the ground 1/4 sec. cor. marked 1/4 on W. face, and raised a mound of stone alongside.

42.50 Spring hollow drs. N.W. about 200 ft.

40. Subdivision T. 38 S. R. 5 W.

Chains	
55.00	Top of abrupt descent.
80.00	Set sandstone 24 × 12 × 6 ins. for 18 ins in [illegible] cor. to secs. 4, 5, 8, and 9, marked N 5 notches on S. and 4 notches on E. edges, and raised a mound. a of stone alongside.
	Land, North 25 chs. gently rolling bench, south 55 chs mountains.
	Soil 2nd and 3rd rate.
	High Mountains on 55 chs.
	East on a random line bet secs. 4 and 9.
	Va. 15° 30' E.
40.00	Set temporary 1/4 sec. cor.
80.00	Intersect N. & S line 60 lks N. of the cor to secs. 3, 4, 9 and 10.
	Thence.
	N. 89° 34' West on a true line bet secs. 4 and 9, with same va.
15.00	Ridge decends N. W.

Salt Lake Meridian 41

Chains

35.00 Enter timber

40.00 Set sandstone 20×10×10 ins 15 ins in the ground, for 1/4 sec. cor. marked 1/4 on N. face from which a pine 20 ins. in diam. brs. S. 85° W 50 lks. dist. marked 1/4 S.B.T.

No other tree convenient to mark

50.00 Leave scattering timber.

60.00 Foot of mountain.

71.00 Hollow drs. N.W.

80.00 The cor. to secs. 4. 5. 8 and 9

Land mountainous

Soil 3rd rate.

Scattering timber on 15 chs.

High Mountains on 60.00 chs.

North on a random line bet secs. 4 and 5.

Va. 15½° E.

40.00 Set temporary 1/4 sec. cor.

79 Intersect N. boundry of Tp. 80 lks E. of the cor. to secs. 4, 5, 32 and 33 re-established by me under

2 42. Subdivision T. 38 S. R. 5 W.

Chains		Chains
	present contract.	
	Thence.	40.00
	S. 0°34' E. on a true line	
	bet. secs. 4 and 5 with same	
40.79	Set sandstone 14×10×6 ins. 9 ins.	
	in the ground for 1/4 sec. cor.	60.00
	marked 1/4 on W. face and	62.00
	raised a mound of stone	80.00
	alongside.	
75.50	Hollow dos N. W.	
80.79	The cor. to secs. 4, 5, 8, and 9	
	Land rolling bench slopes N.	
	Soil 1st rate	
	Dense undergrowth, rabbit bush	
	and oak on 80.79 chs.	
	May 19. 1884	
	From the cor to secs. 5, 6, 31, and	
	32, on the south boundry of	
	Tp.	
	established under present	
	contract.	
	I run.	
	North bet. secs. 31 and 32	40.00
	Va 15°30' E.	80.34

BOOK-A-202

Salt Lake Meridian 48

Chains

40.00 Set limestone 14×10×10 ins 9 ins. in the ground, for 1/4 sec. cor. marked 1/4 on W. face and raised a mound of stone alongside

60.00 Ridge decends S. 20° E.

62.00 Ravine dra. S. 20° E. Ascend N.

80.00 On point of rocky cliff set sandstone 30×12×4 ins. 22 ins. in the ground for cor. to secs. 29, 30, 31 and 32 marked 1 notch on S. and 5 notches on E. edges. and raised a mound of stone alongside

Land rolling and broken.

Soil 1st and 3rd rate.

Dense undergrowth oak and sage brush on 80 chs.

(2) (1) Scattering pine & cedar timber

East on a random line bet. secs. 29 and 32.

Va 15° 20' E.

40.00 Set temporary 1/4 sec. cor.

80.34 Intersect N. and S. line 54 lks.

44. Subdivision T. 38 S. R. 5 W.

Chains	S. of the cor. to secs. 28, 29, 32 and 33 Thence.	Chains 2	De
	S. 89° 3' W. on a true line bet. sec. 29 and 22 with same va.	1	ser
2.00	Leave pine timber.		F.
11.00	Main ridge brs. N. and S.		We
21.30	Perpendicular ledge about 30 ft. high.		sec
28.00	Wash in cañon drs. S. W.	40.00	Set
33.00	Spur of ridge decends 3 chs. S. to cañon.	39.90	In
35.25	Perpendicular ledge about 75 ft. high bears N. and S.		th
38.00	Trail in left Hand Cañon brs. S.		re-
40.17	Left Hand Cañon set sandstone 30 x 30 x 22 ins. 24 ins. in the ground for 1/4 sec. cor. marked 1/4 on N. face and raised a mound of earth alongside.		co
60.00	Top of ridge brs. N. and S.		S.
70.00	Swale drs. S.		se
80.34	The cor. to secs. 29, 30, 31, and 32	39.90	Set
	Land, high mountains		in
	Soil, 1st and 4th rate		co
			ra
			an
		50.00	R.
			co
		52.00	R.
		60.00	Pa
		79.90	Th
		65.00	Ra

chains 2	Dense undergrowth oak and serviceberry. on 80.34 chs.
1	Pine timber on 2 chs.
	West on a random line bet. secs. 30 and 31.
	Va °15 °30 E.
40.00	Set temporary 1/4 sec. cor.
19.90	Intersect W. boundry 45 lks. S. of the cor. to secs. 29, 30, 31, and 32, re-established under present contract.
	Thence.
	S. 89°40' E. on a true line bet. secs. 30 and 31, with same va.
39.90	Set sandstone 15 × 10 × 3 ins. 10 ins. in the ground for 1/4 sec. cor. marked 1/4 on N. face, and raised a mound of earth and stone alongside.
50.00	Ridge about 50 ft. high course N. and S.
59.00	Ravine drains S.
60.00	Ridge about 50 ft. high course N. and S.
79.90	The cor. to secs. 29, 30, 31, & 32.
65.00	Ravine drns S

46 Subdivision T. 38 S. R. 5 W.

Chains	
	Land level & rolling
	Soil 3rd rate.
	Dense undergrowth oak and serviceberry on 79.90 chs.
	North bet secs. 29. and 30.
	Va. 15° 20' E.
0.20	Ascend perpendicular precipice.
13.00	Spur of ridge decends W.
33.00	Ravine drs. W.
40.00	Set limestone 24 x 12 x 5 ins 18 in in the ground for 1/4 sec. cor marked 1/4 on W. face. and raised a mound of earth and stone alongside
50.00	Ridge about 15.00 ft. above Cr. decends W.
66.50	Ravine drs. W.
80.00	Set limestone 22 x 10 x 7 ins 16 in in the ground for cor to secs 19, 20, 29 and 30. marked 2 notches on S. and 5 notches on E. edges and raised a

Chains	
	a
	L
	So
	D
	&
	W
	b
40.00	S
80.66	I
	N
	C
	p
34.20	I
40.33	S
	n
	n
	c
	e
68.50	

BOOK-A-202

Chain mound of earth and stone alongside.
Land mountainous.
Soil first and third rate
Dense undergrowth oak brush
& serviceberry on 80.00 chs.
Mountains on 80.00 chs.

East on a random line
bet. secs. 20 and 29.
Va. 15° 20' E.

40.00 Set temporary 1/4 sec. cor.

80.66 Intersect N. and S. line 60 lks
N. of the cor. to secs. 20, 21, 28, & 29.
Thence
N. 89° 34' W. on a true line bet
secs. 20 and 29, with azimuth
34.20 Wash in canon chs. S.

40.33 Set sandstone 18 x 12 x 3 ins. 12 ins.
in the ground, for 1/4 sec. cor.
marked 1/4 on N. face.
and raised a mound of
earth and stone alongside.

68.50 High dividing ridges.

48 Subdivision T. 38 S. R. 5 W.

Chains	
	brs. N. and S.
80.66	The cor. to sec. 19, 20, 29, and 30.
	Land mountain ridges.
	Soil 1st and 3rd rate.
	Dense undergrowth oak &
	~~cerrisbury~~ brush on 80.66 chs.
	Mountains on 80.66. chs.
	West on a random line
	bet. secs. 19 and 30.
	Va. 15°20' E.
40.00	Set temporary 1/4 sec. cor.
80.80	Intersect W. boundry of Tp 35 lks
	S. of the cor. to secs. 19, 24, 25
	and 30. re-established under
	present contract.
	Thence.
	S. 89°45' E. on a true line bet.
	secs. 19 and 30 with same va
40.80	Set limestone 20×15×10 ins. 15
	ins. in the ground for 1/4 sec.
	cor. marked 1/4 on N. face and
	raised a mound of earth
	and stone alongside.

BOOK-A-202

Salt Lake Meridian 49

Chains	
62.00	Ravine drs. N.W.
77.00	Dividing ridge brs. N. E & S. W.
80.80	The cor. to secs. 19, 20, 29, and 30
	Land, rolling
	Soil 1st and 2nd rate.
	Dense undergrowth sage & oak brush on 80.80 chs.
	North bet. secs 19 and 20. Var 15° 20' E
18.50	Enter pine timber
40.00	Set red sandstone 20 x 12 x 12 ins 15 ins in the ground for 1/2 sec. cor. marked 1/4 of W face. from which
	A pine 4 ins. diam. brs. N. 63° E W 50 lks. dist.
	A pine 12 ins. in diam. brs. N. 40° E 45 lks. dist., each marked 1/4 S. B. T.
70.00	Leave timber
80.00	Set flint rock 28 x 12 x 12 ins 23 ins in the ground, for cor. to sec. 17, 18, 19, and 20, marked 3

50 Subdivision T. 38 S R. 5 W.

Chains	
	notches on S. and 5 notches on E. edges, and raised a mound of stone alongside.
	Land mountainous.
	Soil first and 3rd rate
2	Dense undergrowth and oak brush on 80.00 chs.
	Scattering timber, pine on 61,80 chs.
1	Mountains on 80.00.
	May 21. 1884
	East on a random line bet. secs. 17 and 20
	Va. 15° 20' E
40.00	Set temporary 1/4 sec. cor.
80.00	Intersect N. and S line ~~bet~~ -5 chs. N. of the cor. to secs. 16, 17, 20 & 21,
	Thence.
	N. 89° 36' W. on a true line bet. secs. 17 & 20 with same va.
1.00	Wash drs. S.
8.00	Spurr of ridge decends S.
21.90	Wash in cañon drs. N.W. Enter aspen brush.
37.50	Enter timber. Leave dense aspen brush.
40.00	Set limestone 18×17×9 ins. 12 ins in the ground, for 1/4 sec. cor.

BOOK-A-202 387

Chains marked 1/4 on N face, from which
A quaking asp 6 ins. in diam. bs.
S. 40° E 80 lks dist.
A pine 30 ins. in diam. bs. N. 75°
E 130 lks. dist. each marked 1/4
S. B. T.
70.00 Leave timber.
80.00 The cor to sec. 17, 18, 19 & 20
Land rolling mountains.
Soil 1st and 2nd rate.
Timber on 32.50 chs.
Dense undergrowth oak brush
& Aspen on 16.60 chs.
Augmented on 48.10 chs.

West on a random line bet.
secs. 18 and 19.
Va. 15° 20 E.
40.00 Set temporary 1/4 sec. cor.
80.25 Intersect W. boundry of Tp. 76
lks. N. of the cor. to sec. 13, 18, 19
and 24. re-established under
present contract.
Thence.

Chains	N. 89° 28' E. on a true line bet. secs. 18 and 19 with same va.
31.50	Hollow dra. N.
40.25	Set blue limestone 26 x 24 x 6 ins. 20 ins. in the ground for 1/4 sec. cor. marked 1/4 on N. face, and raised a mound of stone alongside.
46.30	Hollow dra. N. W.
80.25	The cor. to secs. 17, 18, 19, & 20. Land gently rolling. Soil first and 2nd rate. Dense undergrowth oak & sage brush on 80.25 chs.

North bet. secs. 17 and 18
Va. 16° 30' E.

2.50	Road bears N. W. & S. E.
10.40	Wood road bs. E. & W.
40.00	Set sandstone 14 x 10 x 7 ins. 9 ins. in the ground for 1/4 sec. cor. marked 1/4 on W. face, and raised a mound of stone alongside.

See 388A

388 A

in the ground, for cor to secs.
7, 8, 17 & 18, marked 4 notches
on S. & 5 notches on E. edges,
and raised a mound of
stone alongside.
Land, gently rolling.

BOOK-A-202

Salt Lake Meridian. 53.

chains	~~Land~~, ~~gently~~ ~~rolling~~	
	Soil, sand and gravel. 1st & 2nd rate.	
	Dense undergrowth oak service berry & sage brush on 80 chains.	
	East on a random line bet. secs. 8 and 17.	
	Va. 15°30' E.	
.00	Set temporary 1/4 sec. cor.	
.00	Intersect N. and S. line 50 lks. N. of cor. to secs. 8, 9, 16, & 17.	
	Thence.	
	N. 89° S. 9 W. on a true line bet. secs. 8, and 17, with same va.	
7.00	Cañon drs. N. 60° W.	
	Enter timber.	
.00	Ridge decends N. 60° W.	
	Leave timber.	
.00	Foot of mountain course N. 30° East & S. 40° W.	
.00	Set sandstone 14 x 10 x 4 ins 9 ins. in the ground, for 1/4 sec.	

54. Subdivision T. 38 S., R. 5 W.

Chains	
	cor. marked 1/4 on W. face and raised a mound of earth and stone alongside.
68.80	Hollow drs. W. W.
	Trail in hollow.
76.50	Trail brs. N. W. and S. E.
80.00	The cor. to secs. 7, 8, 17 & 18.
	Land rolling and broken.
	Soil, sand, and gravel 2nd and 3rd rate.
2	Dense undergrowth, sage brush on 80.00 chs.
1	Scattering timber on 11.00 chs.
	West on a random line bet. secs. 7 and 18.
	Va. 15° 30' E.
40.00	Set temporary 1/4 sec. cor.
80.20	Intersect W. boundary of Tp. 46
	Lks. S. of the cor. to secs. 7, 12, 13 and 18, re-established under present contract.
	Thence
	S. 89° 41' E. on a true line bet.

Chains	
3.00	
10.00	
40.20	
80.20	
2	
1	
5.00	
40.00	
80.00	

BOOK-A-202

Salt Lake Meridian. 55

Chains secs. 7. and 18, with same va.

3.00 Enter scattering timber.

10.00 Leave scattering timber.

40.20 Set sandstone 30×20×8 ins. 22 ins. in the ground, for 1/4 sec. cor. marked 1/4 on W. face, and raised a mound of stone alongside.

80.20 The cor. to secs. 7, 8, 17 and 18.

Land, rolling and broken.

Soil, sand and gravel 1st and 2nd rate.

Dense undergrowth sage brush oak and service berry on 80.20 chs.

(2) (1) Scattering timber on 7.00 chs.

North bet. secs. 7 & 8.

Va. 15° 30' E.

5.00 Trail bra. N.W. & S.E.

40.00 Set sandstone 17×12×4 ins. 12 ins. in the ground, for 1/4 sec. cor. marked 1/4 on W. face, and raised a mound of stone alongside.

80.00 Set limestone 14×10×10 ins. 9 ins.

56 Subdivision T. 38 S. R. 5 W.

Chains	
	in the ground, for cor. to secs. 5, 6, 7, and 8, marked 5 notches on E. and S. edges and raised a mound of earth & stone alongside.
	Land nearly level.
	Soil, 2nd rate.
	Dense undergrowth, sage brush on 80
	East on a random line bet. secs. 5 and 8.
	Va. 15° 30' E.
40.00	Set temporary 1/4 sec. cor.
79.95	Intersect N. and S. line 56 lks S. of the cor. to secs. 4, 5, 8, and 9.
	Thence
	S. 89° 36' W. on a true line bet. secs. 5 and 8, with same va.
1.00	Ridge bears N. W. and S. E.
6.00	Hollow drs. N. W.
10.00	Ridge bs. N. W.
26.00	Hollow drs N. W.
30.00	Ridge bs N. W.
39.97	Set sandstone 14 x 10 x 4 ins. 9 ins.

Chains in the ground for 1/4 sec. cor.
marked 1/4 on N. face and
raised a mound of earth,
and stone alongside.
6.00 Top of abrupt descent 100 ft. high
4.00 Leave scrub cedar bs. N.W. &
S.E. 300 lks through.
4.00 Descend abruptly.
2.60 Hollow 3 chs. above
spring dis N.W.
1.95 The cor. to secs. 5, 6, 7 and 8.
Land rolling bunch.
Soil 1st rate.
Dense undergrowth oak & rabbit
brush on 7.9, 9.5 chs.

Thence
West on a random line bet.
secs. 6 and 7.
Va 15°30' E.
0.00 Set temporary 1/4 sec. cor.
0.50 Intersect W. boundy of Tp. 60 lks.
N. of the cor. to sec. 1, 6, 7 & 12 re-
established under present
contract.

58 Subdivision T. 38 S. R. 5 W.

Chains	Thence.	Chains
	N. 89° 34' E. on a true line bet secs 6 & 7 with same va.	
33.00	Ridge descends N. W.	
37.00	Hollow drs. N. W.	
40.50	Set sandstone 14×8×6 ins. 9 ins. in the ground, for 1/4 sec. cor. marked 1/4 on N. face and raised a mound of earth and stone alongside.	5.00 17.50 40.00
43.00	Trail bs. N. & S.	
53.75	Wash in hollow drs. N. W.	
80.50	The cor. to secs. 5, 6, 7 and 8	75.00
	Land rolling.	
	Soil first and second rate	
	Dense undergrowth rabbit	
	bush on 80.50 chs.	80.00
	Some scattering timber.	
	North on a random line bet. secs. 5 and 6.	
	Va. 16° 30' E.	
40.00	Set temporary 1/4 sec. cor.	
80.00	Intersect N. boundry of Tp. 38 lks.	

9
1

2
1

BOOK-A-202 395

Salt Lake Meridian

5-9

Chains. S. of the cor. to secs. 5, 6, 8 & 32, re-established under present contract.

Thence.

S. 0° 33 E. on a true line bet secs. 5 and 6 with same ex.

5.00 Abrupt ascent.

17.50 Swale drs. N. W.

40.00 Set sandstone 16 x 10 x 8 ins. 10 ins. in the ground, for 1/4 sec. Cor. marked 1/4 on W. face, and raised a mound of stone along side

78.00 Mud spring hollow.

There are a number of springs above and below line. This is Silas Harris's sheep ranch.

80.00 The cor. to secs. 5, 6, 7 and 8.

Land rolling.

Soil 2nd rate.

Dense undergrowth oak and rabbit brush on 80 chs.

Some scattering timber.

May 22nd 1884.

(2)
(1)

60 Sub. T. 38 S. R. 6 W.

General Description.

This township contains a variety of land from Valleys to mountains and soil from rich loam to barren rocks.
The E. tier of secs. was not surveyed on account of precipous cliffs of mountains.
The Pink Cliffs extend the entire length of the township and are from 100 to 300 ft. high bearing nearly N. and S.
The entire township is high being on the rim of the Great Basin. The soil is above the average, infact all except the rock could be classed 1st rate
The township ~~is covered~~ is covered with rich grasses and large herds of cattle and horses, flocks of sheep are kept here in summer

BOOK-A-202

There is heavy pine timber on the East part of the township and scattering pines on the mountains.

There is a settler in sec. 32 having a farm and meadow of about 40 acres cultivated and a temporary settler in sec. 6.

The snow in winter falls to a great depth and in the spring melts and forms rushing torrents of water.

The Township is well watered and the soil will produce abundant crops without irrigation.

Shadrach M. Richardson
U.S. Deputy Surveyor.

Blank

Page

BOOK-A-202

[4.—LIST OF NAMES.]

A list of the names of the individuals employed by Shadrach M. Richardson *United States deputy surveyor, to assist in running, measuring, and marking the lines and corners described in the foregoing field notes of the survey of* ~~Township 38 South Range 5 West of the~~ the exterior and subdivision lines of township 38 South Range 5 west

of the Salt Lake base and meridian in the Territory of Utah, showing the respective capacities in which they acted.

, *Compassman.*

Christian Sutter, *Chainman.*

Archie Gardner, *Chainman.*

Charles Jones, *Chainman.*

John Elsook, *Chainman.*

Edwin Q. Woolley, *Axeman.*

Marvin A. Brown, *Axeman.*

, *Flagman.*

Blank

Page

[15.—FINAL OATHS OF ASSISTANTS.]

We hereby certify that we assisted Shadrach W. Richardson United States deputy surveyor, in surveying all those parts or portions of the Exterior and Subdivision lines of Township 38 South Range 5 West

of the Salt Lake base and meridian in the Territory of Utah, as are represented in the foregoing field notes as having been surveyed by him, and under his direction; and that said survey has been in all respects, to the best of our knowledge and belief, well and faithfully surveyed, and the corner monuments established according to the instructions furnished by the United States surveyor-general for Utah.

Christian Sueller, ~~Chainman~~ Compassman.

Archie Gardner, Chainman.

Charles Jones, Chainman.

John E. Cook, Chainman.

Edwin Woolley, ~~Chainman~~ Axeman.

Moroni A. Brown, Axeman.

, Axeman.

, Flagman

Subscribed and sworn to before me this 23rd day of May 1884

Ernst Salomon
Notary Public

Blank

Page

BOOK-A-202

U. S. SURVEYOR GENERAL'S OFFICE,

Salt Lake City, Utah, July 21 *1885.*

The foregoing field notes of the survey of the Subdivisions of Fractional *Township No.* 38 South *Range No.* 5 West. *Executed by* Shadrach M. Richardson *Under* his *contract of the* No. 123. 19th *day of* December *1883., in the month of* May *1884., having been critically examined, the necessary corrections and explanations made, the said field notes, and the surveys they describe are hereby approved.*

Fred Salomon

U. S. Surveyor General for Utah.

Blank

Page

BOOK-A-202

405

REPORT: 1885

Filed 188

Examined by

Transcribed by Edward Michaelis

Compared by O. Salomon & H. Atkinson

FIELD NOTES

OF THE RE SURVEY OF THE

Panguitch Guide Meridian

OF

Township No 38 S.

Range No 5 & 6 W

OF THE

SALT LAKE MERIDIAN

IN

UTAH TERRITORY,

AS SURVEYED BY

S. M. Richardson

U. S. Deputy Surveyor,

Under his Contract No. 123

Dated December 19th 1883

Survey commenced May 20th 1884

Survey completed May 26th 1884

NAMES AND DUTIES OF ASSISTANTS:

	Compassman.
	Chainman.
	Chainman.
	Chainman.
	Chainman.
	Axeman.
	Axeman.
	Flagman.

Resurve
BOOK
T.38 S.
Chains In
R.5
to the
as it
Com
and 3
North
36. i
form
chs. fo
place
line
near
be fou
and 38
ing c
had
no sub
on eith
the sa
Surv
Fro
to to
rang
a

Resurvey Tangent to Guide Meridian

BOOK A-202

T. 38 S. Rs. 5 & 6 W. Salt Lake Meridian

Chains In subdividing township 38 S. R. 5 West, was unable to connect on to the cor. to secs. 25, 30 31 and 36 as it was down and out of place commenced at the cor. to townships 38 and 39 S. Rs. 5 and 6 W., thence I run North on a blank line bet. secs. 35 & 36. with a Va of 16°00' E. and at 40 chs. found the ¼ sec. cor. down, and at 80 chs. found the cor. down and out of place. I therefore continued the true line north, many of the corners were nearly obliterated and some could not be found, But found the cor. to T. 37 and 38 S. Rs. 5 and 6 W. due north of the starting corner, and as T. 38 S. Rs. 5 + 6 W. had not been subdivided and consequently no subdivision lines had been closed on either side of this Meridian. I resurveyed the same as follows.

Survey commenced May 20" 1884 From the established corner to townships 37 and 38 S. of the ranges 5 and 6 W. which is a sand stone

Re-survey Tanquitch Guide Meridian

Chains firmly set in the ground marked with 6 notches on N.S.E. and W. edges with a mound of earth and stone along side. Thence, South, on a true re-survey line bet. Secs. 1 and 6

Va 16°00'E

Ascend

27.00 Ridge about 80. ft. above Tp. cor. brs. N.W. and S.E.

40.00 Found no trace of old corner Set a sand stone 15×12×5 ins. 10 ins. in ground for reestablished ¼ sec. cor., marked ¼ on W. face and raised a mound of earth and stone along side

Thence along E. side of hollow.

80.00 Found cor. down and out of place, set a lime stone 14×7×5 ins 8 ins. in ground for the reestablished cor. to secs. 1, 6, 7 and 12, marked 1 notch on the north and 5 notches on

P. 38 S. R's 5 & 6 West, Salt Lake Meridian

Chains the south edges, and raised a mound of earth and stone along side,

Land rolling hills & ridges

Soil 2nd rate

Timber scattering Cedars

Dense undergrowth sagr brush and scrub oak on 80.00 Chs.

South, on a true re-survey line, between secs. 7 and 12

Va. 16° 00' E.

16.00 Ridge about 100 ft. above last cor. brs. E. and W.

40.00 Find ¼ sec. cor. - to wit a sand stone 15 X 12 X 9 ins. firmly set in ground marked ¼ on W. face and raised a mound of stone along side.

53.20 Gulch drs. N. 5° W. heads about S. 15° E.

80.00 Find cor in good condition to wit. A sand stone 15 X 10 X 5 ins. firmly set in the ground, for cor to secs

Resurvey Tanguitch Guide Meridian

Chains		Chains
	7, 12, 13 and 18 marked 2 notches N. and 4 notches S. edges from which a lone pine on edge of hill brs. S. 7° W. 75 lks. dist., marked S. 13 T. 38 S. R. 6 W. B. T. as there was no other tree, and to perpetuate the cor. raised a mound of earth and stone along side	75.00
	Land Rolling	80.00
	Soil 2nd rate	
	No timber	
	South, on a true re-survey line bet. Secs. 13 and 18	
	Va 16° 00' E.	
	Ascend	
2.00	Enter plateau about 40 ft. above last sec. cor. brs. N. E. and S. W.	
40.00	Corner is down re set same, Viz a sand stone 19 X 11 X 7 ins. 12 ins in ground for re-established 1/4 sec. cor. marked 1/4 on W. face and raised a mound of earth and stone along side	11.00
		33.00
		40.00

T 38 S. Rs 5 & 6 W. Salt Lake Merridian

Chains

75.00 A hollow about 60 ft. below plateau drs. N.W.

80.00 Cor. was thrown down re-set same Viz.- A sand stone 18X12X6 ins. 12 ins. in ground, for re-established cor to Secs 13, 18, 19 & 24, marked 3 notches on the East and W. edges and raised a mound of earth and stones along side.

Land nearly level plateau soil 2nd rate
No timber

South on a true re-survey line bet Secs 19 and 24
Va 16° 00' E.

Over rolling ground

11.00 Gulch drs. N.W.

33.00 Gulch drs. N.W.

40.00 No trace of cor. set a sand stone 14X8X5 ins. 10 ins. in ground for re-established 1/4 Sec. cor. marked 1/4 on W. face and raised

Resurvey Panguitch Guide Meridian T. 38 S.

Chains	
	a mound of earth and stone along side.
46.00	Gulch ~~Drains~~ N.W.
66.00	Hollow drains " "
72.00	Road brs. N.W. and S.E.
80.00	Cor. is thrown down ~~and~~, re-set same a sand stone 16 x 10 x 5 ins. 11 ins. in ground for re-established cor. to secs. 19, 24, 25 and 30, marked 4 notches on N. and 2 notches on S. edges, and raised a mound of earth and stone along side
	Land rolling
	Soil 2nd rate
	No timber
	South, on a true resurvey line bet secs. 25 and 30
	Va 16° 00' E.
	Over mountains
5.00	Leave ~~hollow~~ and enter
	Pine timber brs. N.W. and S.E.
40.00	Cor. thrown down, re-set same, Viz. ~~Set~~ a quartzite stone 14 x 6 x 6

T. 38 S. R. 5½ E. W. Salt Lake Meridian

Chains 9 ins. in ground for re-established 1/4 sec. cor. marked 1/4 on W. side, and raised a mound of earth and stone along side from which found old bearing trees as follows, Viz. A fir 6 ins. dia brs. S. 45° E. 5 lks dist a pine 29 ins. dia brs N. 60° W. 48 lks. dist Each marked 1/4 S. B. T.

47.50 Top of ridge about 300 ft. above ~~last~~ sec. cor., this is the rim of the Great Salt Lake basin, bears E. ¾ N.

51. descend

57.00 Gulch about 100 ft. below ridge bears E. and W. drs. E.

57.75 Gulch drs. S. E.

63.00 Descend

80.00 Old cor. in hollow is thrown down, re-set same, Viz. a sand stone 24 X 10 X 8 ins. 16 ins. in ground, for re-established cor. to secs. 25, 30, 31 and 36, marked 5 notches on N. and 1 notch on S. edges, from which a pine 16 ins. diam brs. N. 50° W.

Re-survey Panguitch Guide Meridian T. 38 S.

Chains.		Chains.
	112 lks. dist. marked S. 25 T. 38 S. R. 5 W. B.T. no other tree convenient to mark, raised a mound of stone alongside	80.00
	Land high rolling mountain	
	Soil 2nd rate	
	Timber pine on 75 chs	
	High mountains on 80.00 chs	
	South, on a true re survey lin bet. Secs. 31 and 36	
	Va. 16°00' E.	
5.00	Ascend, Leave timber and enter oak undergrowth	
20.00	E. point of ridge, about 10 chs E. Descend over rolling ground	
30.00	Hills not so steep enter prairie ~~and~~ rolling foot hills	
40.00	Found corner down and out of place, reset same to wit a sand stone 11X10X5 ins 7 ins. in ground, for re-establishe 1/4 sec. cor. marked 1/4 on W. face, and raised a mound	

T. 38 S. R. 5 & 6 W. Salt Lake Meridian.

Chains. of earth and stone along side
80.00 The cor. to townships 38 and 39 S. R's. 5 and 6 W. which is a conglomerate stone 15 in in ground, marked with 6 notches on N. S. E. and W. Edges with a mound of stone along side

Land rolling
Soil 1st rate,
Timber pine on 5 chs.
Dense undergrowth oak and sage brush on 80.00 chs
May 20th 1884

For General Description see subdivision notes.
Shadrach M. Richardson
US Dep Surveyor

Blank

Page

BOOK·A·202

U. S. SURVEYOR GENERAL'S OFFICE,

Salt Lake City, Utah, Feby 21 1885.

The foregoing field notes of the survey of the Sanguitch Guide Meridian

Township No. 38 S. Range No. 5 & 6 W.

Executed by Shadrach M. Richardson

Under his contract No 123. of the 19. day of December, 1883., in the month of May 1884. having been critically examined, the necessary corrections and explanations made, the said field notes, and the surveys they describe are hereby approved.

Frd Salomon

U. S. Surveyor General for Utah.

Blank

Page

BOOK-A-202 419

REPORT: 1884

Filed 188

Examined by O.E.S.

Transcribed by E. Michaelis

Compared by O.E. Salomon & H. Atkinson

FIELD NOTES

OF THE SURVEY OF THE

North Boundary

Township No 38 S.

Range No 6 W

OF THE

SALT LAKE MERIDIAN

IN

UTAH TERRITORY,

AS SURVEYED BY

C. M. Richardson

U. S. Deputy Surveyor,

Under his Contract No. 123

Dated December 19th 1883

Survey commenced June 2nd 1884

Survey completed June 2nd 1884

NAMES AND DUTIES OF ASSISTANTS:

E. M. Webb	Compassman.
J. M. Allen	Chainman.
J. S. Fackrell	Chainman.
	Chainman.
	Chainman.
R. Norwood	Axeman.
John E. Cook	Axeman.
	Flagman.

BOOK-A
PR

I, E.
do solemnly s
form the dut
instructions g
and ability, in
Subdivis
30 South

of the Salt La
ory of Utah.
4

Subscribed an
day of Jan

BOOK-A-202 421

[PRELIMINARY OATH OF COMPESSMAN.]

I, E. M. Webb

do solemnly swear that I will well and truly perform the duties of compassmen, according to instructions given me, and to the best of my skill and ability, in the survey of the exterior and subdivision lines of township 30 South range 6 West

of the Salt Lake base and meridian in the Territory of Utah.

E. M. Webb, Compassman.

Subscribed and sworn to before me this 2nd day of June 1884

H. C. Fowler
U. P.

Blank

Page

[2.—PRELIMINARY OATH OF CHAINMEN.]

We, J. M. Allen

and Joseph S. Fackrell

do solemnly swear that we will well and faithfully execute the duties of chain carriers; that we will level the chain upon even and uneven ground and plum the tally pins, either by sticking or dropping the same; that we will report the true distance to all notable objects, and the true length of all lines that we assist in measuring, to the best of our skill and ability, and in accordance with instructions given us, in the survey of the Exterior and Subdivision lines of township 38 South range 6 West

of the Salt Lake base and meridian in the Territory of Utah.

J. M. Allen, Chainman.

Joseph S. Fackrell, Chainman.

, Chainman.

, Chainman.

Subscribed and sworn to before me this 2nd day of June 1884

H. A. Fowler

J. P.

Blank

Page

BOOK-A-202

[3.—PRELIMINARY OATH OF AXEMEN.]

We, R. Norwood

and John E. Cook

do solemnly swear that we will well and truly perform the duties of axemen, in the establishment of corners and other duties, according to instructions given us, and to the best of our skill and ability, in the survey of the exterior and subdivision lines of township 3 South range 6 West

of the Salt Lake base and meridian in the Territory of Utah.

R Norwood, Axeman.

John E Cook, Axeman.

Subscribed and sworn to before me this 2nd day of June 1884

H A Jones

J P

Blank

Page

BOOK-A-202

N boundary T. 38 S. R. 6 W. Salt Lake Mer.

On the night May 31st 1884 I took an observation on the star Polaris, in accordance with instructions contained in the Manual of Surveys, and drove pickets on the line thus established.

Survey commenced June 2nd 1884. with a Burts improved solar compass.

Before commencing this survey I test my compass on the line established last night, and find it correct.

From the cor. to Tps. 37 + 38 S. Rs. 6 and 7 W., I run East on a random line, between said townships, the variation of my compass being 16° 00' E. I set temporary half mile and mile corners at each 40 and

North bound T. 38 S. R. 6 W.

Chains	80 chs. and find the township line to be 5 miles 79 chains and 50 lks. long, and the falling to be 210 lks. S. of the cor. to Tps. 37 and 38 S. Rs. 5 and 6 W. The correction for the true line will therefore be 35 lks. North and 70 lks. East per mile, and its course will be S. 89° 45' W.	Chains 11.50 24.65 31.15 40.00	
	From the cor. to Tps. 37 and 38 S., Rs. 5 and 6 W. which is a white sandstone 18 x 12 x 6 ins. firmly set in the ground marked 6 notches N. S. E. and W. edges, with a mound of earth and stone along side. Thence S. 89° 45' W. on a true line bet. secs. 1 and 36 Va. 16° 00' E	13.90 46.60 48.00 60.80 77.00 77.95	

Salt Lake Meridian

Chains	
	Descend
11.50	Descend abruptly,
24.65	Bottom of hollow about 90 ft. below ridge dis. N. 10° W. Enter cedar timber and ascend
31.15	Top of ridge about 60 ft. above hollow brs. N. 10° W. and S. 10° E.
40.00	Sand stone 16X10X6 ins. down reset some 10 ins. in ground for re-established ¼ sec. cor. and raised a mound of stone along side
43.90	Leave scattering cedars
46.60	Road brs. N. W. and S. E.
48.00	Bottom of hollow about 60 ft. below ridge dis. N. W. Ascend.
60.80	Top of ridge about 75 ft. above hollow brs. N. W. and S. E.
77.00	Dry bed of a branch of the Sevier river brs. N. + S. a large spring good water about 6 chs. N.
77.95	Main travelled road from

North boundary T. 38 S. R. 6 W.

Chains	
	Salt Lake City to Arizona brs. N. and S.
80.00	Find cor. down a sandstone 16 x 10 x 8 ins. reset same 11 ins. in ground for re-established cor to secs. 1, 2, 35 and 36 marked 1 notch E. and 5 notches W. edge and raised a mound of earth and stone along side.
	Land high rolling mountains soil 1st and 2nd rate
	Scrub cedar on 18.35 chs
	Dense undergrowth on 80.00 ch
	S. 89° 45' W. on a true line bet. secs. 2 and 35.
	Va. 16° E
5.00	Enter Aspen pine timber brs. N. and S.
12.00	Top of ridge about 80 ft. above cor. bears N. E. & S. W.
27.00	A pine 2.8 ins. diam.

Chains	
40.00	Sc
	10 in
	ma
	wh
	W.
	brs.
	ma
53.65	C
	S. W
	dis
56.00	L
64.00	C
70.52	V
	L
80.00	S
	m
	co
	Ed
	on
	3.2

Salt Lake Meridian

Chains

40.00 Set a sand stone 15-X12X10 ins. 10 ins. in ground for ¼ sec. cor. marked ¼ on N. face. from which a pine 20 ins. dia. brs. N.40° W. 12 lks. dist. A pine 30 ins dia brs. S. 3° E. 105 lks. dist. Each marked ¼ S. B.T.

53.65 Cattle ranch fence brs. N. E. and S. W. the N. E. cor of fence is 20 chs dist.,

56.00 Leave timber brs. N. E. and S. W.

64.00 Cattle creek, 20 lks wide 8" deep W. E.

70.52 Road from Long Valley to Salt Lake City, brs. N. E. + S. W.

80.00 Set a blue lime stone 15-X10X4 ins. 10 ins. in ground, for the cor. to Secs. 2, 3, 34 and 35, marked 2 notches on E. and 4 notches on W. edges, from which a Pine 32 ins. dia. brs. N. 60° W. 5 chs.

North boundary T. 38 S. R. 6 W.

Chains	
	dist. marked T. 37 S. R. 6 W. S. 34, B. T. a Pine 24 ins. dia. brs. S. 72½° W. 385 lks. dist. marked T. 38 S. R. 6 W. S. 3. B. T. No other tree convenient to mark raised a mound of earth and stone along side
	Land rolling and level
	soil 1st and 2nd rate
	Heavy Pine timber on 44 chs.
	Dense undergrowth on 8000 chs.
	S. 89°45' W. on a true line, bet. secs. 3 and 34
	Va. 16°00' E.
	Enter heavy pine timber
5.90	Road from Salt Lake City to Long Valley brs. N. E. & S. W.
37.00	Top of ridge & ledge 5 ft. high brs. N. & S.
40.00	Set a sand stone 14 X 10 X 3 ins. 8 ins. in ground

BOO

Sa

Chains	
	for
	fro
	brs
	ins
	ea
40.10	De
	N.
	is
	30
45.50	W
65.00	A
	or
	brs.
80.00	Se
	18
	to
	3
	fr
	brs
	T.
	ce

Salt Lake Meridian

Chains

for 1/4 sec. cor. marked 1/4 on N. face from which a pine 14 ins. diam. brs. N. 1° E. 5 lks. dist. a Pine 14 ins. dia brs. S. 30° E. [illegible] lks. dist. each marked 1/4 S. B. T.

40.10 Decend ridge 10 ft. high brs. N. + S.; a field of about 4 acres is South of this point about 30 chs. dist.

45.50 Wash in a hollow drs. S.

65.00 A pine 10 ins dia. on top of ridge or Knoll about 800 ft. high brs. N. + S. descend

80.00 Set a sand stone 24 X 15 X 6 ins. 18 ins. in ground for the cor. to secs. 3, 4, 33 and 34 - marked 3 notches on E and W edges. from which a pine 24 ins. dia brs. S. 80° E. 75 lks. dist - marked T. 38 S. R. 6 W. S. 3 B. T. A and Cedar 14 ins. dia. brs. S. 40° W. 42 lks.

North boundary T. 38 S. R. 6 W.

Chains	
	dist. marked T. 38 S. R. 6 W. S. 4 B. T. a pine 12 ins. dia brs. N. 60° W. 78 lks. dist. marked T. 37 S. R. 6 W. S. 33 B. T. a pine 20 ins. dia brs. N. 15° E. 25 lks. dist. marked T. 37 S. R. 6 W. S. 34 B. T.
	Land high mountains
	Soil 1st & 3rd rate
	Heavy Pine timber on 80 ch.
	S. 89° 45' W. on a true line bet. sec. 4 and 33
	Va. 16° 00' E.
13.70	Road from Castle Ranch to Mammoth Cr. brs. N. W. & S. E.
16.00	A spring good Water 100 lks. N. of line brs. N.
30.00	Top of ridge descends N.
33.50	Top of Ledge 10 ft. high brs. N. W.

Sa

Chains	
	and
3.50	Bot
7.00	Ca
10.00	S. 21
	ins.
	ma
	a Pi
	a Pi
	Eac
60.00	Top
	abo
80.00	Set
	ins.
	sec
	4 a
	on/
	Pin
	m
	a P
	lk
	W.

Salt Lake Meridian

Chains	
	and S. E.
35.00	Bottom of Canon drs. N.
37.00	Cave in ledge 5 ft high
40.00	Set a lime stone 14x6x4 ins. 9 ins. in ground for ¼ sec. cor. marked ¼ on N. face from which A Pine 30 ins. dia brs. S. 45° E. 30 lks. dist. A Pine 20 ins. " " N. 88° E 100 " " Each marked ¼ S. B. T.
60.00	Top of mountain about 600 ft. above hollow brs. N. & S.
80.00	Set a lime stone 16x8x3 ins. 11 ins. in ground for the cor. to secs. 4, 5, 32 and 33 marked 4 notches on E. and 2 notches on W. edges from which A Pine 9 ins. dia. brs. N. 15° E. 70 lks. dist. marked T. 37 S. R. 6 W. S. 33 B. T. A Pine 18 ins. dia brs. N. 15° W. 30 lks. dist. marked T. 37 S. R. 6 W. S. 32 B. T. A pine 16 ins. dia

North boundary T. 38 S. R. 6 W.

Chains	
	brs. S. 45° W. 35 lks. dist. marked T. 38 S. R. 6 W. S. 5 B. T.
	A Pine 12 ins. dia. brs. S. 35° E. 100 lks. dist. marked T. 38 S. R. 6 W. S. 4 B. T.
	Land high rolling mountains Soil 1st. rate + 3rd rate
	Heavy Pine Timber on 80 chs.
	S. 89° W. 45' on a true line bet. Secs 5 and 32
	Va 16° 00' E.
20.00	Swain's Creek a branch of Sevier river 2 ft deep 20 lks wide rapid current rocky bottom runs N. E. in a deep cañon
32.50	Point from which center of main Canon brs N. 48° E.
40.00	Set a blk Lava stone 24

Salt Lake Meridian

Chains. 20X 8 and 8 ins. in a mound of stone for 1/4 Sec. cor. marked 1/4 on N. face. from which a red cedar 16 ins. dia brs. N. 40° E. 20 lks. dist. a red cedar 10 ins. dia. brs. S. 40° W. 23 lks. dist, each marked 1/4 S. B. T.

30.00 Top of Lava Cliff 30 ft. high brs. N. E. and S. W.

52.00 Top of mountain about 700 ft above Cr. brs. N. E. and S. W.

80.00 Set a blk Lava stone 14X10X3 ins. 8 ins in ground, for the cor. to Secs. 5. 6. 31 and 32, marked 5 notches E and 1 notch on W. edges. from which a pine 30 ins. dia. brs. N. 60° W. 150 lks. dist., marked T. 37 S. R. 6 W. S. 31 B. T. no other tree convenient to mark, and raised a mound of stone alongside

North boundary T. 38 S. R. 6 W.

Chains.	
	Land high rolling mountain soil 1st and 3rd rate heavy Pine timber on 80 chs
	S. 89° 45' W. on a true line bet. Secs. 6 and 31
	Va. 16° 00' E.
	Over nearly level plateau through Heavy Pine timber
40.00	Set a black lava stone 18X10X 8 ins, 12 ins. in ground for ¼ sec. cor. marked ¼ on N. face from which a Pine 36 ins. dia. brs. S 80° E 100 lks. dist marked ¼ S. B. T. ~~xo~~ other trees convenient to mark and raised a mound of earth and stone along side
79.30	The cor. to Tps. 37 and 38 S. Rs. 6 + 7 W. which is ~~[illegible]~~

BOOK A-202

Salt Lake Meridian

lava stone 16x10x6 ins 11 ins in ground with 4 bearing trees, properly marked.

Land, rolling

Soil, 2d rate.

Dense timber and dense undergrowth on 80.00 chs.

June 2nd 1884.

For General Description see subdivision notes of this township.

Shadrach M. Richardson

U.S. Dep. Surveyor

Blank

Page

BOOK-A-202

U. S. SURVEYOR GENERAL'S OFFICE,

Salt Lake City, Utah, July 21st 1885

The foregoing field notes of the survey of the North Boundary

Township No. 38 South *Range No.* 6 West

Executed by Shadrach M. Richardson

Under his *contract* No 123 *of the* 19th

day of December 1883, *in the month of*

June 1884, *having been critically examined, the necessary corrections and explanations made, the said field notes, and the surveys they describe are hereby approved.*

Fred Pelouze

U. S. Surveyor General for Utah.

Blank

Page

BOOK-A-202

REPORT: 1883 443

Filed 188

Examined by John [illegible]

Transcribed by Philipp D. Schober

Compared by O. Salomon & P. D. Schober

FIELD NOTES

OF THE SURVEY OF THE

Subdivisions

OF

Township No. 38 South

Range No. 6 West

OF THE

SALT LAKE MERIDIAN

IN

UTAH TERRITORY,

AS SURVEYED BY

Shadrach M. Richardson

U. S. Deputy Surveyor,

Under his Contract No. 123

Dated December 19th 1883

Survey commenced June 3rd 1884

Survey completed June 10th 1884

BOOK-A-202

Township 38 S. R. 6 W.

438		436		434		432		430		428
6	516	5	493	4	480	3	467	2	456	1
515		514		493		479		466		455
7	512	8	491	9	478	10	466	11	454	12
510		509		490		477		464		453
18	507	17	489	16	476	15	463	14	452	13
506		505		488		475		462		451
19	503	20	487	21	474	22	462	23	450	24
501		500		485		473		461		449
30	499	29	485	28	472	27	460	26	448	25
498		497		484		471		459		447
31	495	32	482	33	469	34	458	35	445	36

Panguitch Guide Meridian

408 409 410 411 412 413

Subdivisions T. 38 S. R. 6 W. Salt Lake Meridian

Preliminary to commencing this survey I run N. on Panguitch Guide Meridian on the East B'dy of sec. 36. and at 40.03 chs. found 1/4 sec. cor. and at 80.03. chs. found sec. cor. My compass will therefore run the same line as the exterior boundaries and the chaining practically agrees.

Survey commenced June 3. 1884. with a Burts improved solar compass.

I commenced at the cor. to secs 1. 2. 35 & 36. on the South boundary, which is a sandstone 28x10x4 ins firmly set in the ground, with 1 notch on E. and 5 notches on W. edges and pits 18x18x12 ins in each sec. 5 1/2 ft dist. and raised a mound of earth 1 1/2 ft high 3 1/2 ft base alongside.

Thence.

North betw secs. 35 & 36.

Va. 15° 20' E.

through dense oak brush
5.00. Ridge about 300 ft high
Descend into a ravine dis. S W.
11.70. Ravine ascend.
15.00. Spur of ridge descends W.
22.54. Ravine des W.
30.10. Ridge bro E & W.
35.56. Ravi. & trail bro. S. 32° W.
34.50. Ascend.
40.00 Set sandstone 14x10x8 ins 9 ins in ground for 1/4 sec. cor. marked 1/4 on W. face, dug pits 18x18x12 ins N. & S. of stone 5½ ft diat and raised a mound of earth 1½ ft high 3½ ft base along side.
49.12. Hill about 300 ft high E & W
Descend through oak underbrush
59.00 Foot of hill
72.20 Ascend through oak underbrush
80.00 Set sandstone 17x12x9 12" in ground for cor. to secs 25. 26. 35 & 36, marked with 1 notch on S & E. edges, dug pits 18x18x12 ins in each sec. 5½ ft dia and raised a mound of earth 1½ ft hig

3½
Lan
Soil
Den

East

40.00 Set
80.12. Inte
to se
then
S. 89°

9.82 Ra
23.70. Ri
40.06. Set
gro
on
mo
alo
80.12. The
Lan
Sai
Mo

Salt Lake Meridian

3½ ft base alongside.
Land, mountainous.
Soil, rocky 4th rate.
Dense undergrowth oak brush on 80.00 chs.

East on a random line betw secs
25 & 36.
Va. 15° 20' E.

40.00 Set temp. 1/4 sec. cor.
80.12. Intersect E. bdy of Tp. at 16 lks S. of cor.
to secs. 25. 30. 31 & 36. sec established by me
thence
S. 89° 53' W. on a true line betw secs. 25 & 36.
with same var.
9.82 Ravine dry S.
23.70. Ridge about 200 ft high brs. N. & S.
40.06. Set sandstone 15 x 10 x 8 ins, 10 ins in
ground for 1/4 sec. cor. marked 1/4.
on N. face, and raised a
mound of earth and stone
alongside.
80.12. Set cor. to secs. 25. 26. 35 & 36.
Land gently rolling
Soil, 1st rate
Mountainous on 80.12 chs.

Subdivisions T. 38 S. R. 6 W.

North betw secs. 25 & 26
Va. 15° 20' E.
3.00. Spring 1 chain W. of line
5.00. Cattle trail bears N E & S W
14.00. Ridge about 200 ft high
course N E & S W.
32.75 Ravine dro. S. 20° W.
39.00 Ridge course N E & S W
40.00 Set sandstone 16x6x4 ins 11 ins in
ground for 1/4 sec. cor. marked
1/4 on W. face, and raised a
mound of earth and stone alongside
40.76. Ravine course S W. & N E
53.00. Spur ridge bears S W.
59.00. Ravine dro S W.
74.00. Indian trail bes. S W. & N E
80.00 Set sandstone 14x12x9 ins ge
in the ground for cor. to Secs
23. 24. 25 & 26 marked 2 notches
S. & 1 E. edges and raised
a mound of earth & stone alongside
Land broken and
mountainous.
Soil, rocky 4th rate.

Salt Lake Meridian.

Dense undergrowth oak brush
on 80 rocks.
Mountains on 80, rocks.

East on random line betw secs. 24 & 25.
Var. 15° 20' E

40.00 Set temp. 1/4 sec. cor
79.87 Intersect E. b'dy of Tp. 24 lks.
N. of cor. to secs. 19. 24. 25 & 30.
reestablished by me;
thence
N. 89° 50' W. on a true line betw secs. 24 & 25.
with same var.

39.93 Set sandstone 18x12x4 ins 12 ins
in the ground for 1/4 sec. cor.,
marked 1/4 on bt. face and raised
a mound of earth and stone
alongside

48.70. Ascend
50.00. Ridge N.W. & S.E.
64.80 Swale drs N.W.
76.50 Ridge brs N.E. Indian trail brs N.E. & S.W.
79.87 The cor. to secs. 23. 24. 25 & 26
Land, rolling
Soil, 1st & 2d rate.

Subdivisions T. 38. S. R. 6 W.

Dense undergrowth oak brush on 79.87 chs.
Mountainous on 79.87 chs

North betw. secs. 23 & 24.
Va. 15° 20' E.

5.19 Hill about 150 ft high brs. S.E. & N.
40.00 Set sandstone 24x14x8 ins, 18 ins in the ground for 1/4 sec. cor. marked 1/4 on W. face and raised a mound of earth and stone alongside.
41.80 Trail brs N.W. & S.E.
52.85 Ravine brs N. 20° W. Road brs. N.W. & S.E.
61.00 Ascend.
80.00 Set sandstone 14x8x6 ins g[illegible] in ground for cor. to secs. 13, 23, 24, marked 5 notches on S. 1 on E. edges, and raised a mound of earth and stone alongside
Land, hilly and broken.
Soil, mixed with rock and gravel 4th rate

Salt Lake Meridian

Dense undergrowth on 80.00 chs
Mountainous on 80.00 chs.

East on a random line betw.
secs. 13 & 24.
Va. 15° 20' E.

70.00 Set temp. 1/4 sec. cor.
79.88 Intersect E. boundary of Tp. 26 N.
N. of cor. to secs. 13, 18, 19 & 24.
(reestablished) by me, thence
N. 89° 49' W. on a true line betw. secs.
13 & 24.
with same var.
18.50 Ravine drs. N.W.
39.94 Set sandstone 16x14x6 ins, 11 ins
in the ground for 1/4 sec. cor.,
marked 1/4 on N. face and
raised a mound of earth
and stone alongside.
74.10 Ridge about 150 ft high brs N.W. & S.E.
79.88 The cor. to secs. 13, 14, 23 & 24.
Land, rolling mountains
Soil, 1st & 2d rate.
Undergrowth dense oak and sage
brush on 79.88 chs, mountainous on 79.88 chs

Subdivisions T. 38 S. R. 6 W.

North betw secs. 13 & 14.
Va. 15° 20' E

3.58 Mountain about 300 ft high brs. N.W. & S.E.
Spring brs. N. 20° W. about 10 chs dis
10.00 Foot of hill. Leave brush, swale drs N.
18.58 Ascend.
31.50 Ridge about 180 ft high brs S.E. &
40.00 Set sandstone 14x6x6 ins 9 ins in ground for 1/4 sec. cor., marked 1/4 on W. face, and raised a mound of earth and stone alongside
49.50 Foot of hill brs N.W. & S.E.
50.50 Ravine drs. N.W.
53.25 Road bears. N.W. & S.E.
62.50 Ridge about 180 ft high brs S.E. &
80.00 Set sandstone 18x13x8 ins 13 in in the ground for cor. to sec 11. 12. 13 & 14, marked with 4 notches on S. and 1 notch on E. edges, and raised a mound of stone alongside.
Land, mountains & broken.
Soil mixed sand, gravel an

Lake Lake Meridian.

work 4th rate.
Mountains on 80.00 chs.

East on a random line betw.
secs. 12 & 13.
Va. 15°20' E.

40.00 Set temp. 1/4 sec. cor.
40.20 Intersect E. B'dy of Tp. 34 lks.
N. of cor. to secs. 7. 12. 13 & 18.
(re established) by me.,
thence
N. 89° 45' W. on a true line betw secs
12 & 13 with same var.
40.10 Set sandstone 19x11x8 ins 14 ins in the
ground for 1/4 sec. cor. marked 1/4
on N. face and raised a mound
of earth and stone alongside.
45.00 Mountain about 300 ft high
brs. N. W. & S. E.
50.90 Foot of ridge brs. N. 35° W.
55.00 Ascend.
58.85 Foot of ridge brs. N. 40° W.
60.20 The cor. to secs. 11. 12. 13 & 14.
Land, hilly and broken.

Subdivisions Tp. 38 S. R. 6

Soil, 2d & 3d rate
Dense undergrowth oak and sag brush on 80. 20 chs.
June 3d 1884

North betw secs. 11 & 12.
Va. 15° 20' E.

5.25 Foot of hill brs N E.
30.50 Ridge about 150 ft high brs N W.
40.00 Set sandstone 14x6x2 ins 9 ins in ground for 1/4 sec. cor. mark 1/4 on W. face and raised mound of earth and stone alongside.
43.00 Ascend.
57.25 Hill about 100 ft high brs. N. 30° W.
62.00 Foot of hill brs. N. 30° W.
80.00 Set sandstone 18x8x4", 13" in ground for cor. to secs 1. 2. 11 & 12, marked 5 notches on S. & 1 on E. edges and raised a mound of earth and stone alongside.

BOOK

Salt

Lan
Soil
Den
oa

Eaa

40.00 Set
80.00 In
N. of
rec
the
N. 8

10.00 Fo
37.84 Mo
b
40.00 Set
in
1/4 b
mou
alo
63.41 Foo

Salt Lake Meridian.

Land, broken & hilly.
Soil, rocky & gravel 4th rate.
Dense underygrowth sage and oak brush on 80.00 lks.

East on a random line betw. secs. 1 & 12.
Va. 15°20' E

40.00 Set temp. 1/4 sec. cor.
80.00 Intersect E. boundary of Tp 8 lks N. of the cor. to secs. 1. 6. 7 & 12. reestablished by me; thence
N. 89°57' W. on a true line betw. secs 1 & 12. with same var.
10.00 Foot of hill
37.84 Mountain about 400 ft high. bcs. N E.
40.00 Set sandstone 18 x 7 x 5 ins, 13 ins in ground for 1/4 sec. cor. marked 1/4 on N. face, and raised a mound of earth and stone alongside.
63.41 Foot of ridge.

Subdivisions T. 38 S. R. 6 W. Salt

71.50 Ridge N.W. & S.E.
74.00 Small spring branch
80.00 The cor. to secs. 1. 2. 11 & 12
Land, hilly & broken.
Soil, rocky 3d & 4th rate.
Dense undergrowth oak bush
on 80. 00 chs

North on a random line betw. secs. 1 & 2.
Va. 13° 20' E.
40.00 Set temp. 1/4 sec. cor.
80.05. Intersect S. b'dy of Tp. 36
lks W. of the cor. to secs 1. 2. 35. 36, which is a sandstone 18x14x8 firmly set in the ground with 0 pits 18x18x12 ins in each sec. 5½ ft dist and mound of earth 2 ft high 4½ ft base alongside
thence
S. 0° 16' W. on a true line betw. secs 1 & 2
with same var.
18.00 Road from Kanab to Salt Lake City

N. E.
30.00 Road
City
40.05. Set
for 1/4
and
stone
47.76. Road
bis N.
64.80 Road
bis N.
80.05. The
Land
Soil
Dense
brush
grass

From
S. B'dy
15x16x3
with
5½ ft
earth

Salt Lake Meridian.

N.E.

30.00. Road from Kanab to Salt Lake City bis. N.

40.05. Set sandstone 16x11x6ins 10ins in ground for 1/4 sec. cor., marked 1/4 on W. face and raised a mound of earth and stone alongside.

47.76. Road from Kanab to Salt Lake City bis N. 1° W. Creek bed N. E. & S. W.

64.80 Road from Kanab to Salt Lake City bis N. 1° E.

80.05. The cor. to secs. 1. 2. 35 & 36.
Land, broken.
Soil, 2d & 3d rate
Dense undergrowth sage & oak brush on 80.05. chs.
Grass good for grazing

From the cor. to secs. 2. 3. 34 & 35 on the S. Bdy of the Tp. which is a sandstone 15x10x5" firmly set in the ground with flits 18x18x12ins in each sec. 5½ ft dist, and a mound of earth 2 ft high 4½ ft base.

along side, thence S. run
North betw. secs. 34 & 35.
Va. 15° 20' E.

39.50 Foot of hill.

40.00 Set sandstone 12x8x3 ins, 7 ins in ground for 1/4 sec. cor. marked 1/4 on W. face, raised a mound of earth and stones alongside.

47.60 Road from Upper Kanab to Salt Lake City bra N. 60° E.

49.50 Ravine dbs. SW.

52.00 Ascend.

75.00 Hill about 100 ft high bra N. E.

80.00 Set sandstone 18x9x8 ins 13 ins in the ground for cor. to secs. 26, 27, 34 & 35, marked 1 notch on S. & 2 on E. edges, and raised a mound of earth and stones alongside.

Land, hilly & broken.
Soil, rocky & gravelly 4th rate
Mountainous on 80.00 chs

Salt Lake Meridian.

East on random line betw secs
26 & 35.
Va. 15° 20' E

40.00 Set temp. 1/4 sec. cor.

79.20 Intersect N. & S. line 42 lks
N. of cor. to secs. 25. 26. 35
& 36.

Thence.
N. 89° 42' W. on a true line betw secs.
26. & 35
with same var.

39.60 Set sandstone 16x10x6 ins, 11 ins in
ground for 1/4 sec cor., marked
1/4 on N. face and raised
a mound of earth and
stone alongside.

66.00 Descend.

71.00. Ravine drs. S. 5° W.
Road from Upper Kanab
to Salt Lake City brs N. & S.

73.50. Ascend.

79.20. The cor. to secs 26. 27. 34 & 35.
Spring brs. N. W.
Land rolling and broken
Soil, 2d & 3d rate.

Land, rolling & broken.
Dense undergrowth oak and
sagebrush on 79.20 chs.

North betw. secs. 26 & 27.
Va. 15° 20' E.

20.00 Hill about 100 ft high brs. E & W.
40.00 Set sandstone 20 x 9 x 2 ins 15 ins
in the ground for 1/4 sec. cor.
marked 1/4 on W. face, and raised
a mound of stone alongside
51.00 Cañon & road from Longvalley
to Salt Lake City brs N E & S W.
53.50 Ascend.
66.00 Hill about 100 ft high brs N E
72.45 Ravine drs S E.
79.45 Hill about 100 ft high brs E & W
80.00 Set sandstone 18 x 7 x 3 ins 13
in the ground for cor. to secs
22. 23. 26 & 27, marked 2 notches
on E & S. edges, and raised
a mound of stone alongside
Land, hilly & broken
Soil, mixed rock & gravel 4 ch rat

Salt Lake Meridian.

Dense undergrowth oak brush on 80.00 chs.

East on a random line between secs. 23 & 26. Va. 15° 20' E.

40.00 Set temp. 1/4 sec. cor.

39.78 Intersect N. & S. line 18 lks N. of the cor. to secs. 23. 24 & 25 & 26 thence N. 89° 52' W. on a true line betw. secs. 23 & 26. with same var.

39.89 Set sandstone 12x10x10 ins 7 ins in ground for 1/4 sec. cor, marked 1/4 on W. face and raised a mound of earth and stone alongside.

57.50 Hill about 100 ft high bes N. 10° E.

63.58 Road from Long valley to Salt Lake City in ravine bes. N. E & S. W.

79.78 The cor. to secs. 22. 23. 26 & 27. Land hilly and broken. Soil, 2d 3d rate. Dense undergrowth oak and sage brush on 79.78 chs.

18 Subdivisions Tp. 38 S. R 6

North betw. secs. 22 & 23
Va. 15° 20' E.

10.00 Ravine drains E.
13.00 Hill about 150 ft high brs E.
40.00 Set sandstone 20 x 14 x 8 ins, 15 ins in ground for 1/4 sec. cor. marked 1/4 on W. face, and raised a mound earth and stone alongside.
45.00 Canon drains S.E.
80.00 Set sandstone 16 x 14 x 12 ins 11 in in the ground for cor. to secs. 14, 22 & 23, marked 3 notches on S. and 2 on E. edges, and raised a mound of earth & stone alongside.
Land, almost level.
Soil 1st & 2d. rate.
Dense undergrowth oak and sagebrush on 80.00 chs.

East on a random line betw. secs. 14 & 23.
Va. 15° 20' E.

Salt Lake Meridian

40.00 Set temp. 1/4 sec. cor.
80.22. Intersect N. & S. line 20 lks. S. of cor.
to secs. 13. 14. 23 & 24.
thence.
S. 89° 51' W. on a true line betw secs.
14. & 23
with same var.
40.11 Set sandstone 14x8x4" 9 ins in ground.
for 1/4 sec. cor, marked 1/4 on N. face and
raised a mound of stone alongside.
61.60. Dry creek 20 lks wide 2 ft deep.
Drains N.
62.20 Road from Kanab to Salt Lake City
bro N. & S.
78.50 Ridge bears N.W. & S.E.
80.22. The cor. to secs. 14. 15. 22 & 23
Land, nearly level.
Soil, 2d rate.
Dense undergrowth oak and sage
brush on 80.22 chs

June 4. 1884

North betw. secs. 14 & 15.
Va. 15° 20' E.

Subdivisions T. 38 S. R. 6 W.

11.45. Hill about 60 ft high brs S E & N
40.00 Ravine 15 ins wide 10 ins deep
drs. E. Set sandstone 14 x 8 x 4 ins
9 ins in ground for 1/4 sec. cor.
marked 1/4 on W. face, and raised
a mound of earth and stone
alongside.
45.50 Hill about 100 ft high brs.
N. 85° E.
57.25. Gulch drs. E & SW.
80.00. Set sandstone 19 x 8 x 8 ins 14 ins
in the ground for cor. to secs. 10.
11. 14 & 15, marked 4 notches
on S. & 2 notches on E. edges
and raised a mound of earth
and stone alongside.
Land, nearly level.
Soil, 2d & 3d rate.
Dense undergrowth oak and
sage brush on 80.00 chs.

East on a random line betw
secs. 11 & 14.
Va. 15° 20' E.

BOOK

Sales

40.00 Set
80.28 Inte
of th
then
N. 89°
21.00. Ente
high
37.00 Leave
40.14. Set s
in th
mar
raise
stone
45.70 Roa
47.00 Dry
49.05 Roa
brs
55.00 Foot
80.28 The
Land
Soil,
Timb
Dense

BOOK-A-202

Salt Lake Meridian.

40.00 Set temp. 1/4 sec. cor.

80.28 Intersect N. & S. line 41 lks N. of the cor. to secs. 11, 12, 13 & 14.

Thence

N. 89° 42' W. on a true line betw secs 11 & 14 with same var.

21.00. Enter timber. Hill about 100 ft high brs. N W. & S E.

37.00. Leave scattering timber brs N. & S.

40.14. Set sandstone 19 x 5 x 4 ins 12 ins in the ground for 1/4 sec. cor. marked 1/4 on N. face and raised a mound of earth and stone alongside.

45.70 Road into hills brs. S E & N W.

47.00 Dry creek 30 lks wide 3 ft deep runs N.

49.05 Road from Salt Lake City to Kanab brs S. and N.

55.00 Foot of hill brs N. & S. ascend.

80.28 The cor. to secs. 10, 11, 14 & 15.

Land, level and rolling.

Soil, 1st rate.

Timber scattering pine on 16.00 chs

Dense undergrowth oak brush on 80.28 chs

22. Subdivisions T. 38. S.R. 6W.

North betw. secs. 10 & 11.
Va. 15° 20' E.

38.00 Ridge brs. N.E. & S.W.
40.00 Set sandstone 14 x 9 x 6 ins, 9
in ground for 1/4 sec. cor., mark
1/4 on W. face and raised a
mound of earth & stone along
48.50 Enter scattering timber.
65.00. Hill about 150 ft below cor
brs E. & W. Leave timber
80.00 Set sandstone 18 x 12 x 9 ins, 12
in ground for cor. to secs. 2
10. & 11., marked 5 notches
and 2 on E. edges, and raised
a mound of stone alongside
Land, hilly & broken
Soil, 2d rate.
Undergrowth sage brush on 80.00 chs
Scattering timber on 16.50 chs.
mountainous on 80.00 chs

East on a random line betw. secs. 2 & 1
Va. 15° 20' E.

40.00 Set temp. 1/4 sec. cor.
80.00 Intersect N. & S. line 25

4 Rs. N. of cor. to secs. 1. 2. 11 & 12.
Thence
N. 89° 49' W. on a true line betw secs
2 & 11. with same var.
9.15 Road from Kanab to Salt Lake
City brs S. W & N E.
9.20 Dry creek drs. N.
9.58 Hill about 100 ft. below ridge
brs. N E & S W.
40.00 Set sandstone 19x8x8 ins 12 ins in
ground for 1/4 sec. cor. marked 1/4 on N. face
and raised a mound of earth & stone alongside.
54.30 Top of hill brs N E & S W.
65.00 Foot " " " " "
80.00 The cor. to secs. 2. 3. 10 & 11.
Land hilly & broken
Soil, rocky 3d rate.
Dense undergrowth sage and
oak brush on 80.00 chs.

North on a random line betw
secs. 2 & 3.
Va. 15° 20' E.

24.

Subdivisions T. 38 S. R. 6 W.

40.00 Set temp. 1/4 sec. cor.
79.62. Intersect N. bdy of Tp. 8 lks E. of cor. to secs. 2, 3, 34 & 35, m is a sandstone 14x12x4 ins firmly set in the ground, marked 4 notches on W. & 2 on E. edges and dug pits 18x18x12 ins in each sec. 5 1/2 ft. dist and raised a mound of earth 2 ft high 4 1/2 ft base alongside, thence S 0° 3' E on true line betw. secs. 2 & 3. with same var.
8.50 Road from Kanab to Salt Lake City bears N E & S W.
12.88 Castle Creek 20 lks wide 6' deep runs N Spring 40 lks W. of line good water
15.00. Enter timber.
39.62. Set sandstone 23x18x13 ins 18 ins in ground 1/4 sec. cor., marked 1/4 on W. face from which a pine tree 19" dia brs. N. 2° E. 48 lks dist, marked 1/4 S. No other tree convenient to mark, raised a mound of stone alongside.
44.30 Ridge about 152 ft high bcs N E & S W.

Salt Lake Meridian.

62.00. Leave timber bro. N E & S W.
79.62. The cor. to secs. 2. 3. 10 & 11.
Land, nearly level.
Soil, 2d rate.
Dense undergrowth sage and oak brush on 79.62 chs.
Timber on 64. 62 chains.

From the cor. to secs. 3. 4. 33 and 34. on the S. b'dy of the Tp. which is a sandstone 14 x 12 x 4 ins firmly set in the ground marked with 3 notches on E. & W. edges, and raised a mound of stone alongside.
I run.
North betw. secs. 33 & 34.
Va. 15° 20' E.
7.20. Leave timber.
13.00 Road from Long Valley to Salt Lake City bro N E & S W. Log cabin bro S. 81° W. about 10 chs dist
25.00. Enter timber bro E & W.
30.40 Ridge about 100 ft high

26. Subdivisions T. 38 S. R. 6 W.

bes N E. & S W.

35.00 Ravine 15 lks wide 33 ins deep drs

40.00 Set sandstone 13x6x4 ins 8 ins in ground for 1/4 sec. cor. marked 1/4 on W. face, from which a pine 18" dia. bes. N. 18° W. 20 lks dist marked 1/4. S B. T.

No other tree,

raised a mound of stone alongside

51.50 Hill about 80 ft high bes on W.

80.00 Set sandstone 13x6x5 ins, 8 ins in ground for cor. to secs. 27. 28. 33 & 34, marked 3 notches on E. & 1 on S. edges, from which a pine 4" dia bes. S. 84° E. 50 lks dist. marked. T. 38. S. R. 6 W. S. 34. B. T.

a pine 23" diam. bes. S. 26° W. 48 lks dist. marked T. 38 S. R. 6. W. S. 33. B. T.

a pine 30" diam. bes. N. 53° W. 40 lks. dist. marked T. 38. S. R. 6 W. S. 28 B. T.

a pine 6 ins diam. bes. N. 88° E.

East Lake Meridian

74 lks dist, marked T. 38 S.
R. 6 W. S. 27. B. T.
Land, mountainous.
Soil 2d rate.
Dense undergrowth oak brush
on 80.00 chs
Timber on 62. 20 chs

East on a random line betw
secs. 27, 34.
Va. 15° 20' E.

40.00. Set temp 1/4 sec. cor
79.93 Intersect N. & S. line 13 lks S.
of the cor. to secs. 26. 27. 34.
and 35.
Thence
S. 89° 54' W. on a true line betw.
secs. 27, 34. with same var.
20.10 Top of hill
39.96. Set sandstone 19 x 7 x 5 ins 13 ins
in ground for 1/4 sec. cor. marked
1/4 on N. face, and raised a
mound of earth and stone
alongside.

Subdivisions T. 38 S. R 6 W.

41.20 Road from Long Valley to Sa
Lake City brs N.W. & S.E. in ravin
50.00 Ascend.
79.93 The cor. to secs. 27. 28. 33 & 34
Land, mountainous.
Soil, 2d & 3d rate.
Dense undergrowth oak brush
on 79.93 chs.

North betw. secs. 27 & 28
Va. 15° 20' E.
30.00 Leave pine timber.
40.00 Set sandstone 13x8x6ins 7in
in ground for 1/4 sec. corner
marked 1/4 on W. face, and
raised a mound of stone
alongside.
71.00 Indian trail brs N.W.
80.00 Set sandstone 21x13x6ins 16in
in the ground for cor. to secs.
21. 22. 27 & 28, marked 2
notches on S. & 3 on E. edge
and raised a mound

Salt Lake Meridian.

of stone alongside.
Land, hilly and broken.
Soil, 2d & 3d rate.
Timber on 30.50 chs.
Dense undergrowth sage and
oak brush on 80.00 chs.
June 5, 1884.

East on a random line betw.
secs. 22 & 27.
Va. 15° 20' E.

40.00 Set temp. 1/4 sec. cor.
79.80 Intersect N. & S. line 28 chs
S of the cor. to secs. 22, 23, 26 and
27.
thence
S. 89° 48' W. on a true line betw.
secs. 22 & 27 with same var.
39.90 Set sandstone 14x4x3 ins 9* ins
in ground for 1/4 sec. cor. marked
1/4 on N. face, and raised a
mound of stone alongside.
73.70 Hill about 100 ft high bro N & S.
79.80 The cor. to secs. 21, 22, 27 & 28.

30.

Subdivisions T. 38. S. R. 6.

Land, rolling.
Soil, 2d & 3d rate.
Dense undergrowth oak brush on 79.80 chs.

North betw secs. 21 & 22.
Va. 15° 20' E

10.50 Descend through oak underbrush
35.50 Ravine 15 lks wide 4 ins deep drs. S. 60° E.
40.00 Set sandstone 17 x 5 x 4 ins 12 in ground for 1/4 sec. cor marked 1/4 on W. face raised a mound of stone alongside.
70.00 Ridge drs. N E & S W.
80.00 Set sandstone 15 x 9 x 8 ins, in ground for cor to secs 15. 16. 21 & 22 marked 3 notches on S. & E. edges. and raised a mound of stone alongside.
Land, rolling & hilly
Soil, 4th rate.
Dense undergrowth oak brush on 69.

BOOK-

Sect

East on
S

40.00 Set
.08 Inter
S. of c
thenc
S. 89° 5

.00 Hill
.56 Foot
.04 Set s
the grou
on N. y
of ear
41.80 Top
4.10 Hill
0.08 The
Land
Soil
Dens
bru

R. 6. Salt Lake Meridian.

East on a random line between
secs. 15 & 22.
Va. 15°20' E.

.00 Set temp. 1/4 sec. cor.
.08 Intersect N. & S. line 22 lks.
S. of cor. to secs. 14. 15. 22 & 23.
Thence
S. 89°51' W. on a true line between secs.
15 & 22.
with same var.

6.00 Hill about 60 ft. high. brs N. & S.
.56 Foot hill.
.04 Set sandstone 14 x 9 x 8 ins 9 ins in
the ground for 1/4 sec. cor., marked 1/4
on N. face and raised a mound
of earth and stone alongside.
14.80 Top of hill
17.10 Hill about 100 ft high brs N. & S.
20.08 The cor. to secs. 15. 16. 21 & 22.
Land, mountainous.
Soil, 3d rate.
Dense undergrowth oak
brush on 80.08 ch.

Subdivisions T. 38 S. R. 6 W.

North betw. secs. 15 & 16
Va. 15° 20' E

36.00. Hill about 150 ft high brs E.
40.00 Set sandstone 14 x 5 x 4 ins 9 ins in the ground for 1/4 sec. cor. marked 1/4 on W. face and raised a mound of earth and stone alongside.
65.30. Enter scattering timber.
80.00. Set sandstone 20 x 12 x 3 ins 15 ins in ground for cor. to secs. 9, 15 & 16, marked 4 notches on S. and 3 on E. edges from which
a pine 25" dia. brs. S. 71° E. 100 lks dist. marked T. 38 S. R. 6 W. S. 15. B. T.
a pine 12" dia brs. N. 30° E. 75 lks dist. marked T. 38 S. R. 6 W. S. 10. B. T.
a pine 36" dia. brs. N. 30° W. 72 lks dist. marked T. 38. S. R 6 W. S. 9 B. T.
a pine 30" dia. brs. S. 45° W. 98 lks dist. marked T. 38 S. R 6 W. S. 16. B. T.
Land, rolling
Soil, 2d & 3d rate.

BOOK-A-202

Tacs Lake Meridian.

Scattering timber on 14.70 chs.
Dense undergrowth, oak brush
and mountains on 80.00 chs.

East on a random line betw secs
10 & 15.
Va. 15° 20' E.

40.00 Set temp. 1/4 sec. cor.
79.60 Intersect N. & S. line 12 lks S.
of cor. to secs. 10. 11. 14 & 15. thence
S. 89° 55' W. on a true line betw secs.
10 & 15 with same var.
27.30 Top of hill
39.80 Set sandstone 17x11x8 ins 12 ins
in the ground for 1/4 sec. cor.
marked 1/4 on N. face and
raised a mound of earth
and stone alongside.
60.00. Spring N. of line.
63.00. Entered timber Top of hill
bes. N. W. & S. E.
79.60 The cor. to secs. 9. 10. 15 & 16.
Land, rolling and level

Subdivisions T. 38 S. R. 6 W.

Soil 1st rate.
Timber pine and quaking asp
on 14.60 chs
Dense undergrowth oak brush
on 79.60 chs.

North betw secs. 9 & 10.
Va. 15° 20' E

9.00. Foot of hill, leave timber corral.
10.12 Leave corral. Enter loamy bottom
40.00 Set sandstone 14x10x6 ins 8 ins in ground
for 1/4 sec. cor. marked 1/4 on W. face
and raised a mound of stone alongside
80.00. Set sandstone 27x8x4 ins 21 ins in
ground for cor. to secs. 3. 4. 9 & 10., marked
5 notches on S. & 3 on E. edges from which
a pine 33 ins dia. brs. S. 80° W. 210 lks dist
marked T. 38 S. R. 6 W. S. 9. B. T.
a pine 28 ins dia. brs. N. 25° W.
155 lks dist, marked
T. 38 S. R 6 W. S. 4. B. T.
a pine 18 ins dia. brs. N. 30° E.
250 lks dist. marked
T. 38. S. R. 6 W. S. 3 B. T.

East Lake Meridian.

No other tree convenient to mark.
Spring No. S. 74 E 58 lks dist.
Log house belonging to Clarissa
Hoyt bears N. 25° W. 180 lks dist.
Corrals & other improvements
br. N. 30° W.
Land, level and rolling.
Soil, 2d rate.
Fine timber on 9. rocks.
Dense undergrowth oak brush
on 80. rocks.

East on a random line
betw. secs. 3 & 10.
Va. 15° 20' E.
40.00 Set temp. 1/4 sec. cor.
39.70 Intersect N. & S. line 22 lks S.
of cor. to secs. 2. 3. 10 & 11.
Thence
S. 89° 51' W. on a true line betw
secs. 3 & 10.
with same var.
39.85 Set sandstone 24 x 24 x 12 ins.

36. Subdivisions T. 38 S. R. 6 W.

18 ins in ground for 1/4 sec. cor. marked 1/4 on N. face, and raised a mound of stone alongside

41.00 Precipice about 12 ft high.

48.70 Foot of ridge about 40 ft high. bro. N E.

60.00 Leave timber

65.00 Fence N E & S W. enter large field

73.75 Fence leave the large field bro. S E

79.78 The cor. to secs. 3. 4. 9 & 10.
Land, level and rolling
Soil, 1st & 2d rate.
The cor. to secs. 3. 4. 9 & 10.
Land, level & rolling.
Soil 1st & 2d. rate.
Timber on 60.00 chs.
Dense undergrowth oak and sage brush on 66.95 chs.

North on a random line betw. secs 3 & 4
Va. 15° 25' E.

40.00 Set temp. 1/4 sec. cor.

BOOK-

Salt

80.70 Inte
E. of
sand
grou
and
a pin
dist
a red
ma
a pin
ma
a pin
ma
the
S 00°
3
31.65 Foo
40.70 Set
in
ma
a m
alon
42.60. Ro
63.88 Ro

Salt Lake Meridian.

80.70 Intersect N. Bdy of Tp. 6. 1 lks. E. of cor. to secs. 3. 4. 33 & 34, which is a sandstone 24 x 15 x 6 ins 11 ins in ground, marked 3 notches on E. and W. edges from which
a pine 24" dia. brs. S. 80° E. 75 lks. dist, marked T. 38 S. R. 6 W. S. 3. B. T.
a red cedar 14" dia. brs. S. 40° W. 42 lks dist marked T. 38 S. R. 6 W. S. 4 B. T.
a pine 12" dia. brs. N. 60° W. 78 lks dist. marked T. 37 S. R. 6 W. S. 33. B. T.
a pine 20" dia. brs. N. 15° E 25 lks dist marked T. 37 S. R. 6 W. S. 34. B. T.
thence
S. 0° 3' E. on a true line betw secs 3 & 4. with same var.

31.65 Foot of hill brs. N. 3° E & S. 3° W.

40.70 Set sandstone 18 x 8 x 4 ins 9 ins in the ground for 1/4 sec. cor. marked 1/4 on W. face, and raised a mound of earth and stone alongside.

42.60. Road to Levier brs. N. & S. 2° E.

63.88 Road from Longvalley to Salt

Subdivisions T. 38. S. R. 6 W.

lity bes. N. 30½° E.
65.80 Fence bes N. E. & S. W. Enter field
75.50 Fence bes. N. W. & S. E. leave field
80.70 The cor. to secs. 3. 4. 9 & 10.
Land, rolling.
Soil, 2d rate.
Dense undergrowth oak brush
on 71.00 chs.

June 6. 1884

From the cor. to secs. 4. 5. 32 &
33. on the S. b'dy of the Tp.
which is a sandstone 18x17x10
firmly set in the ground
marked 4 notches E. & 2 notches
W. edges and raised a mound
of earth and stone alongside
Prun.
North betw. secs. 32 & 33.
Va. 15° 20' E.
14.00 Road from Long Valley to Salt Lake
lity bes. N. 6° E. and S. 6° W.
40.00 Set sandstone 14x6x3 ins 9 ins in

the ground, for 1/4 sec. cor. marked 1/4 on W. face, and raised a mound of earth and stone alongside.

Road from Longvalley to Salt Lake City, N. 5° W. and S. 5° E.

Set sandstone 26 x 8 x 6 ins. 20 ins. in the ground, for cor. to secs. 28, 29, 32 and 33, marked 4 notches on E. and 1 notch on S. edges, from which

A pine 28 ins. in diam. brs. N. 12° W. 52 lks. dist., marked

T. 38 S. R. 6 W. S. 29 B. T.

A pine 16 ins. in diam. brs. N. 9° E. 58 lks. dist. marked

T. 38 S. R. 6 W. S. 28 B. T.

A pine 20 ins. in diam. brs. S. 34° E. 93 lks. dist., marked

T. 38 S. R. 6 W. S. 33 B. T.

A pine 30 ins. in diam. brs. S. 57° W. 84 lks. dist., marked

T. 38 S. R. 6 W. S. 32 B. T.

Land, rolling.

Soil, 2nd and 3rd rate.

Undergrowth, dense sage and oak brush on 80 chs.

40. Subdivision T. 38 S. R. 6 W.

Chains	East on a random line bet. secs. 28 and 33.
	Va. 15° 28' E.
40.00	Set temporary 1/4 sec. cor.
79.40	Intersect N. and S. line 40 lks. N. of the cor. to secs. 27, 28, 33 and 34.
	Thence
	N. 89° 43' W. on a true line bet. secs. 28 and 33 with same va.
39.70	Set sandstone 14 x 12 x 8 ins. 9 ins. in the ground, for 1/4 sec. cor. marked 1/4 on N. face, from which
	A pine 19 ins. in diam. brs. S. 22° E. 22 lks. dist., marked 1/4 S. B. T., and raised a mound of stone alongside.
44.00	Foot of ridge about 258 ft. high brs. N. 18° E. and S. 18° W.
79.40	The cor. to secs. 28, 29, 32 and 33.
	Land, level and rolling.
	Soil, 2nd and 3rd rate.
	Undergrowth, dense sage and oak brush on 79.40 chs.

Salt Lake Meridian.

North betw secs. 28 & 29.
Va. 15° 20' E.

40.00 Set sandstone 14x8x6 ins 9 ins in ground for 1/4 sec. cor. marked 1/4 on W. face, from which a pine 18" dia. bears S. 16° W. 28 lks dist, marked 1/4 S. B. T.
No other tree convenient to mark. and raised a mound of stone alongside.

65.00 Leave cañon, descend.

74.00 Leave timber.

80.00 Set sandstone 14x6x5 ins, 9 ins in the ground for cor. to secs 20. 21. 28 & 29. marked 2 notches on S. & 4 on E. edges, and raised a mound of stone alongside.
Land, rolling.
Soil 3d rate.
Pine timber on 74 chs.
Dense undergrowth oak and sage brush on 80. chs.

East on a random line betw. secs. 21 & 28.

Subdivisions T. 38 S. R. 6 E.

Va. 15° 20' E

40.00. Set temp. 1/4 sec. cor.

79.78 Intersect N. & S. line 4 lk S. of the cor. to secs. 21. 22. 27 & thence

N. 89° 58' W. on a true line bet secs. 21 & 28.

with same var.

14.30 Foot of ridge about 125 ft hg brs. N. & S.

30.20 Swale drs N.

39.89 Set sandstone 14 x 9 x 9 ins, 9 in ground for 1/4 sec. cor. marked 1/4 on N. face, and raised a mound of stone alongside.

57.00. Foot of ridge about 200 ft hg brs N. & S.

79.78 The cor. to secs. 20. 21. 28 & 29

Land, nearly level.

Soil, 2d & 4th rate.

Dense undergrowth oak brush on 79. 78 chs.

BOOK-A

Salt

Nor

11.00 Mou
cañon

40.00 Set
in gr
1/4 on
mou

77.00 Bot
and

78.85. Roa
Lake

80.00. Set
in gr
16. 17.
on S.
and
alon
Lak
Soil
Den
brus

BOOK-A-202 487

R. 6 E. Salt Lake Meridian.

North betw. secs. 20 & 21.
Va. 15° 20' E.

11.00 Mountain about 1500 ft above cañon brs. N. 20° E. & S. 20° W.

40.00 Set sandstone 16x14x12 ins 11 ins in ground for 1/4 sec. cor. marked 1/4 on W. face, and raised a mound of earth and stone alongside.

77.00 Bottom of cañon brs. N. 40° E. and S. 40° W.

78.85. Road from Long Valley to Salt Lake City brs E.

80.00. Set sandstone 20x12x6 ins 15 ins in ground for cor. to secs. 16, 17, 20 & 21, marked 3 notches on S. & 5 notches on E. edges. and raised a mound of stone alongside.

Land, level & rolling.
Soil, 2d & 3d rate.
Dense undergrowth oak brush on 80.00 chs.

Subdivisions T. 38. S. R 6

East on a random line betw
secs. 16 & 21.
Va. 15° 20' E.

40.00 Set temp. 1/4 sec. cor.

79.64 Intersect N. & S. line 29 lks
S. of the cor. to secs. 15. 16. 21.
and 22.,
thence
S. 89° 48' W. on a true line betw
secs. 16 & 21., with same var

16.00 Foot of ridge. Swale dscd. 20°

39.82 Set sandstone 14x9x8 ins 9 in
in the ground for 1/4 sec. cor.
marked 1/4 on N. face and
raised a mound of stone
alongside.

59.70 Hill about 80. ft high bet
N. E. & S.

78.50 Road from Long valley to
Salt Lake City bears N. 70° W.
and N. 70° E.

79.64 The cor. to secs. 16, 17, 20 & 21.
Land, nearly level
Soil, 2d rate.

Subdivisions T. 38. S. R. 6 W

a pine 8" dia. brs. S. 89° W. 300 lks
dist. marked T. 38 S. R 6 W S. 17 B
Land, nearly level.
Soil, 3d rate.
Timber pine on 67. 40. chs.
Dense undergrowth oak
brush on 70. 00 chs.

East on a random line betw
secs. 9 & 16.
Va. 15° 20' E
40.00. Set temp. 1/4 sec. cor.
80.12 Intersect N. & S. line 12 lks. S
of the cor. to secs. 9. 10. 15 & 16.
thence
S. 89° 55' W. on a true line betw
secs. 9 & 16.
with same var.
8.00 Leave pine timber
13.80 Road from Longvalley to Salt Lake
City brs. N. 38° E
20.00 Foot of mountain. Swale drs
40.06. Set sandstone 14 x 6 x 6 ins 9 ins

Subdivisions T. 38. S. R. 6 W

a pine 8" dia. brs. S. 89° W. 300 lks
dist. marked T. 38 S. R 6 W S. 17 B
Land, nearly level.
Soil, 3d rate.
Timber pine on 67. 40. chs.
Dense undergrowth oak
brush on 70. 00 chs.

East on a random line betw
secs. 9 & 16.
Va. 15° 20' E
40.00. Set temp. 1/4 sec. cor.
80.12 Intersect N. & S. line 12 lks. S
of the cor. to secs. 9. 10. 15 & 16.
thence
S. 89° 55' W. on a true line betw
secs. 9 & 16.
with same var.
8.00 Leave pine timber
13.80 Road from Longvalley to Salt Lake
City brs. N. 38° E
20.00 Foot of mountain. Swale drs
40.06. Set sandstone 14 x 6 x 6 ins 9 ins

the ground for 1/4 sec. cor. marked 1/4 on N. face, and raised a mound of earth and stone alongside.

49.40 Mountain about 300 ft high brs. N. E. & S. W.

59.80 Enter timber.

64.40 Ravine drs. N. 68° E.

80.12 The cor. to secs. 8. 9. 16 & 17.

Land, rolling & broken.

Soil, rocky 4th rate.

Timber pine on 28. 32 chs.

Dense undergrowth, oak brush on 80.12 chs.

North betw secs. 8 & 9.
Va. 15° 20' E.

26.50 Ridge about 80 ft high brs N. & S.

40.00 Set sandstone 14 x 11 x 6 ins 9 ins in the ground for 1/4 sec. cor. marked 1/4 on W. face, from which a pine 12" dia. brs. S. 42° W. 29 lks dist marked 1/4. S. B. T.

No other tree convenient to mark. raised a mound of earth

Subdivisions T. 38 S. R 6 W.

and stone) alongside.

46.00 Scale dis. N. 60° E.

80.00 Set sandstone 30 x 30 x 24 ins 25 ins in the ground for cor. to secs. 4, 5, 8 & 9, marked 5 notches on S. & 4 on E. edges, from which a pine 18" dia. bears S. 25° E. 30 lks dist. marked T. 38 S. R. 6 W. S. 9 B. T.

a pine 20" dia. bears N. 54° E. 64 lks dist. marked T. 38 S. R. 6 W. S. 4. B. T.

a pine 13" dia. bears N. 83° W. 72 lks dist. marked T. 38 S. R. 6 W. S. 5 B. T.

a pine 15" dia. bears S. 44° W. 40 lks dist. marked T. 38 S. R. 6 W. S. 8 B. T.

Land, rolling.

Soil 2d rate.

Timber pine on 80.00 chs.

Dense undergrowth oak brush on 80.00 chs.

June 7th, 1884.

Salt Lake Meridian.

East on a random line betw.
secs 4 & 9.
Va. 15° 20' E.

40.00 Set temp. 1/4 sec. cor.
79.90 Intersect N. & S. line 28 lks S.
of cor. to secs. 3. 4. 9 & 10., thence
W. 89° 48' W. on a true line betw.
secs. 4 & 9. with same var.
17.50 Road from Longvalley to Salt Lake
City bears N. & S.
39.95 Set sandstone 14 x 9 x 7 ins 9 ins in
ground for 1/4 sec. cor. marked
1/4 on N. face, and raised
a mound of stone alongside.
79.90 The cor. to secs. 4. 5. 8 & 9.
Land, gently rolling
Soil, 2d & 3d rate.
Dense undergrowth oak and
sagebrush on 79.90 chs.
Timber on 79.90 chs.

North on a random line
betw secs. 4 & 5.
Va. 15° 20' E.

Subdivisions T. 38 S. R. 6 W.

40.00 Set temp. 1/4 sec. cor.

79.69. Intersect N. bdy of Tp. 38 S. lks W. of the cor. to secs. 4, 5, 32 & 33., which is a sandstone 18x14x12 ins firmly set in the ground, marked 1/4 notches on E. & 2 notches on W. edges, and raised a mound of stone alongside., thence W. 0° 26' N. on a true line betw. secs. 4 & 5.

with same var.

39.69. Set sandstone 16x6x6 ins 11 ins in ground for 1/4 sec. cor., marked 1/4 on W. face, and raised a mound of stone alongside.

79.69 The cor. to secs. 4. 5. 8 & 9.

Land, level and rolling. Soil, 2d & 3d qute.

Pine timber on 79.69 chs. Dense undergrowth oak and sagebrush on 79.69 chs.

Salt Lake Meridian.

From the cor. to secs. 5, 6, 31 and 32, on the S. bdy of the township, which is a sand stone 15x9x8 ins, firmly set in the ground, marked 5 notches on E & 1 on W. edges and raised a mound of earth and stone alongside, I run

North betw secs. 31 & 32.

Va. 15° 20' E

10.25 Cañon dro. W.

20.30 Ridge about 100 ft. high bro. S.E. & W. descend into cañon.

26.18 Cañon bro. N. 5° W.

40.00 Set sandstone 14x9x9 ins 9 ins in ground for 1/4 sec. cor. marked 1/4 on W. face from which a pine 20" in dia bro. N. 80° E. 22 lks dist marked 1/4. S. B. T.

No other tree convenient to mark, and raised a mound of stone alongside.

70.40 Leave cañon and ascend hill.

Subdivisions T. 38 S. R. 6 W.

80.00 Set sandstone 16 x 10 x 5 ins 11 ins in ground for cor. to secs 29, 30, 31 & 32, marked 5 notches on E & 1 notch on S. edges, from which a pine 8" dia. brs. N. 8° E. 30 lks dist., marked T. 38 S. R. 6 W. S. 29 B. T.
a pine 11" dia. brs. S. 73° E. 20 lks dist., marked T. 38 S. R. 6 W. S. 32 B. T.
a pine 5" dia. brs. S. 8° W. 55 lks dist., marked T. 38 S. R. 6 W. S. 31 B. T.
a pine 18" dia. brs. N. 13° W. 50 lks dist., marked T. 38 S. R. 6 W. S. 30. B. T.
Land, level & rolling.
Soil, 3d & 4th rate.
Pine timber on 80.00 chs.
Dense undergrowth oak brush on 80.00 chs

East on a random line betw

BOOK-A-202

secs. 29 & 32.

Va. 15° 20' E.

40.00 Set temp. 1/4 sec. cor.

80.00 Intersect N. & S. line 45 lks.

N. of cor. to secs. 28. 29. 32 & 33

thence

N. 89° 41 W. on a true line betw

secs. 29 & 32, with same va.

3.85 Road from Saw Mill to Sanguitch

brs. N. & S.

27.00 Foot of ridge in cañon brs S.

40.00 Set sandstone 19x9x8 ins, 13 ins

in the ground for 1/4 sec. cor.

marked 1/4 on N. face, from

which

a pine 22" dia. brs. S. 6° E. 18 lks.

dist. marked 1/4 S. B. T.

49.30 Ridge about 80 ft high brs.

N. & S.

80.00 Corner to secs 29. 30. 31 & 32.

Land, hilly & broken.

Soil, 3° rate.

Pine timber on 30.00 chs

Dense undergrowth oak & sage

brush on 80.00 chs.

Subdivisions T. 38 S. R. 6 W.

West on a random line betw secs. 30 & 31.
Va. 15° 20' E.

40.00 Set temp. 1/4 sec. cor.

80.04 Intersect W. b'dy of Tp. 22 lks N. of the cor. to secs 25. 30. 31 & 36 which is a sandstone 18 x 15 x 6 ins firmly set in ground, marked 1 not on S & 5 on N. edges & raised a mound of stone alongside.

Thence
N. 89° 51' E. on a true line betw secs 30 & 31. with same var.

35.00. Ridge about 50 ft high brs N E. & S.

40.04 Set sandstone 15 x 12 x 5 ins, 10 ins in ground for 1/4 sec. cor. marked 1/4 on N face from which a pine 36" dia. brs N. 10° E. 19 lks dis marked 1/4 S. B. T.

No other tree convenient to mark & raised a mound of stone alongside

51.45 Descend through pine

54.80. Road from Longvalley to Salt Lake City in cañon brs N & S.

Salt Lake Meridian.

65.50 Ridge brs. N. 1° W.
75.00 Cañon brs. N. 2° W.
80.04 The cor. to secs. 29, 30, 31 & 32.
Land, hilly.
Soil, 4th rate.
Timber pine on 80.04 chs
Dense undergrowth, oak
brush on 80.04 chs

North betw. secs. 29 & 30.
Va. 15° 20' E.

30.00 Mountain about 500 ft. above
cañon brs S. E. & N. W.
40.00 Ravine brs. N. E. & S. W., set sandstone
15x10x10 ins 10 ins in the ground
for 1/4 sec. cor., marked 1/4 on
W. face from which
a pine 20" dia. brs. S. 2° W. 20 lks
dist. marked 1/4 S. B. T.
No other tree convenient to mark,
raised a mound of stone alongside.
55.00 Mountain brs. N. E. & S. W.
70.00 Foot of ridge brs N. E. & S. W.

BOOK-A-202

Subdivisions T. 33 S. R. 6 W. Sec 2

Leave timber.

80.00 Set sandstone 18x17x10 ins, 13 in ground for cor. to sec. 19, 20, 29 & 30., marked 2 notches on N. and S. on E. edge, and raised a mound of stone along side

Land, level & rolling

Soil, 3d & 4th rate

Pine timber on 70.00 chs.

Dense undergrowth oak brush on 80.00 chs.

East on a random line betw secs. 20 & 29.

Va. 15° 20' E.

40.00 Set temp. 1/4 sec. cor.

79.65. Intersect N. & S. line 29 chs S. of the cor. to secs. 20, 21, 28 & 29., thence

S. 89° 48' W. on a true line betw secs. 20 & 29. with same var.

17.00 Road from Saw Mill to Sanguitch bears N. 40 W.

39.82 Set sandstone 14x11x8 ins, 9 ins

in the
1/4 on
mour
51.50 Inte
70.00 Leav
79.65 Set
Land
Soil,
Pine
Dens
on

West

40.00 Set
79.88 Inte
N. of
which
from
notche
a pin
Ok
R

Saes Lake Meridian.

in the ground for 1/4 sec. cor. marked 1/4 on N. face, and raised a mound of stone alongside.

51.50 Enter timber.

70.00 Leave timber.

79.65 The cor. to secs. 19. 20. 29 & 30.
Land, level & rolling.
Soil, 2d rate.
Pine timber on 18.50 chs.
Dense undergrowth oak brush on 79.65 chs.

West on a random line betw. secs. 19 & 30.
Va. 15° 20' E.

40.00 Set temp. 1/4 sec. cor.

79.88 Intersect W. b'dy of Tp. 16 lks. N. of cor. to secs. 19. 24. 25 & 30. which is a sandstone 18 x 10 x 6 ins firmly set in the ground, marked 2 notches on S. & 4 on N. edges, from which a pine 24" dia. brs S. 44° E 99 lks dist, marked T. 38. S. R. 6 W. S. 30 B. T.

Subdivisions T. 38 S. R. 6 W.

a pine 36" dia. brs. N. 66° E. 85 lks dist. marked T. 38 S. R. 6 W. S. 19. B.T.

a pine 26" dia. brs. N. 29° W. 30 lks dist. marked T. 38 S. R. 7 W. S. 24. B.T.

a pine 18" dia. brs. S. 68½° W. 23 lks dist., marked T. 38 S. R. 7 W. S. 25 B.T.

thence

N. 89° 53' E on a true line betw secs. 19 & 30 with same var.

17.00 Hill brs N. & S.

24.50 Ravine drs S.

28.00 Ravine drs S.

39.88 Set sandstone 14 x 8 x 3 ins 9 ins in ground for 1/4 sec. cor., marked 1/4 on N. face, from which

a pine 18" dia. brs S. 19° W. 16 lks dist, marked 1/4 S. B.T.

No other tree convenient to mark & raised a mound of stone alongside

42.00 Hill brs N. & S.

54.70 Road from Longvalley to Salt Lake City brs N. & S. in Señon, which

Salt Lake Meridian.

drs. S.

68.00 Spur ridge brs. S & N. 80 ft above ravine

69.50 Ravine drs S.

70.00 Enter brush, leave pine

75.50 Knoll about 50 ft high.

79.88 The cor. to secs. 19. 20. 29 & 30.

Land rolling.

Soil, 4th rate.

Dense undergrowth oak brush on 9.88 chs

Heavy timber pine on 70.00 chs.

Augmented on 79.88 chs

North betw secs 19 & 20.

Va. 15° 20' E

36.50 Ravine drs W.

40.00. Mountain, rim of Great Basin.

Set sandstone 14x11x3 ins 9 ins in ground for 1/4 sec. cor., marked 1/4 on W. face and raised a mound of stone alongside.

56.50 Road from Longvalley to Salt Lake City brs. N. 60° E.

Subdivisions T. 38 S. R. 6 W.

73.00 Descend abruptly into cañon
bz N. Enter pine.
80.00 Set sandstone 14x6x8 ins 9 ins in
ground for cor. to secs. 17. 18. 19
& 20., marked 3 notches on S.
and 5. on E. edges, from which
a pine 40" dia. bs. S. 45° W. 5 lks
dist. marked T. 38 S. R 6 W.
S. 19. B. T.
a pine 19" diam. bs. N. 86° W. 35 lks
dist, marked T. 38 S. R 6. W.
S. 18. B. T.
a pine 12" dia. bs N. 4° E. 28 lks
dist, marked T. 38 S. R. 6 W.
S. 17. B. T.
a pine 10" dia. bs S. 85° E. 20 lks
dist, marked T. 38 S. R 6 W.
S. 20. B. T.
Land, hilly & broken
Soil, 2d & 4th rate.
Pine timber on 7.00 chs.
Dense undergrowth oak brush
on 80.00 chs

June 9. 1884.

BOOK-A-202

Salt Lake Meridian.

East on a random line betw. secs. 17 & 20
Va. 15° 20' E.

40.00 Set temp. 1/4 sec. cor.
79.84 Intersect N. & S. line 9 lks W. of cor. to secs. 16, 17, 20 & 21.
thence
N. 89° 57' W. on a true line betw. secs 17 & 20. with same var.
26.00. Enter timber.
39.92. Set sandstone 14x6x6 ins 9 ins in ground for 1/4 sec. cor., marked 1/4 on N. face, from which a pine 20" dia. bears N. 3° E. 22 lks. dist, marked 1/4 S. B. T.
No other tree convenient to mark, raised a mound of stone alongside.
76.50. Abrupt descent.
79.84 The cor. to secs. 17, 18, 19 & 20.
Land, rolling.
Soil, 2d rate.
Pine timber on 53.84 chs.
Dense undergrowth oak brush on 79.84 chs.

Subdivisions T. 38 S. R. 6 W.

West on a random line betw
secs. 18 & 19.
Va. 15° 20' E.
40.00 Set temp. 1/4 sec. cor.
80.10. Intersect W. b'dy of Tp. 24 lks
N. of the cor. to secs 13. 18. 19 & 24
which is a white limestone 16 x 10 x 5
firmly set in the ground
marked 3 notches on N. & S.
edges, from which
a pine 30" dia. brs. S. 17° E.
75 lks dist, marked T. 38 S.
R. 6 W. S. 19 B. T.
a white pine 14" dia. brs. S. 10° W.
83 lks dist, marked T. 38 S.
R. 7 W. S. 24 B. T.
a pine 7 ins dia. brs. N. 47 1/2° W.
180 lks dist, marked T. 38 S.
R. 7 W. S. 13 B. T.
a pine 10 ins dia. brs. N. 52° E
98 lks dist, marked T. 38 S.
R. 6 W. S. 18 B. T.
thence
N. 89. 50' E on a true line betw.
secs. 18 & 19 with same var.

Salt Lake Meridian

40.10 Set sandstone 14x9x3ins 9ins in ground for 1/4 sec. cor. marked 1/4 on W. face, from which a pine 19" dia. bears N. 6° E 63. Also dist, marked 1/4 S.B.I. No other tree convenient to mark and raised a mound of stone alongside.

71.50 Abrupt ascent.

77.50 Cañon bs. N.

80.10. The cor. to secs. 13. 18. 19 & 24.
Land, rolling & broken
Soil, 2d & 3d rate.
Pine timber on 80.10 chs.
Dense undergrowth oak brush on 80.10 chs.

North betw secs. 17 & 18
Va. 15° 20' E.

10.00 Cañon bs N. 22° E.

18.40 Leave cañon.

40.00 Set sandstone 14x6x2ins 6ins in the ground for 1/4 sec. cor. marked.

Subdivisions T. 38 S. R 6 W.

1/4 on W. face, from which
a pine 27" dia. brs. N. 30° E.
30 lks dist, marked 1/4 S. B. T.
No other tree convenient to mark
& raised a mound of stone alongside

60.13. Ridge betw 2 cañons brs.
N. 45° E.

80.00 Set sandstone 16x13x5 ins 11 ins in
the ground for cor. to secs. 7. 8. 17
& 18, marked 5 notches on E.
& 4 notches on S. edges from which
a pine 15" dia. brs. N. 78° E. 60 lks
dist, marked T. 38. S. R. 6 W.
S. 8. B. T.
a pine 20" dia. brs. S. 39° E. 35 lks
dist, marked T. 38 S. R 6 W.
S. 17 B. T.
a pine 24" dia. brs S. 45 1/2° W.
93 lks dist, marked T. 38 S.
R. 6 W. S. 18 B. T.
a pine 24" dia. brs N. 5° W. 54
lks dist, marked T. 38 S.
R. 6 W. S. 7 B. T.

Salt Lake Meridian.

Land, hilly & broken.
Soil, 2d & 3d rate.
Timber pine on 80.00 chs.
Dense undergrowth oak brush on 80.00 chs.

East on a random line betw secs. 8 & 17.
Va. 15° 20' E.

40.00 Set temp. 1/4 sec. cor.
80.07 Intersect N. & S. line 18 lks S. of cor. to secs. 8.9.16 & 17 thence S. 89° 52' W. on a true line betw secs. 8 & 17. with same var. with same var.
26.48 Ridge about 400 ft high bcs N. 45° E.
31.70 Enter cañon.
40.03. Set sandstone 15 x 8 x 8 ins 10 ins in ground for 1/4 sec. cor., marked 1/4 on N. face from which a pine 13" dia. bcs. S. 8° W. 15 lks dist, marked 1/4 S. B. T.

Subdivisions T. 38 S. R. 6 W.

No other tree convenient to m

52.20 Cañon brs. N. 47° E

68.20 Ridge about 800 ft hig
brs N E & S W.

80.07 The cor. to secs. 7. 8. 17 & 18
Land, gently rolling.
Soil, 3d & 4th rate.
Timber on 80.07 chs
Dense undergrowth oak
brush on 80.07 chs.

West on a random line betw
secs. 7 & 18.

Va 15° 20' E

40.00 Set temp. 1/4 sec. cor.

79.76. Intersect W. bdy of Tp. 29
lks. S. of cor. to secs. 7. 12. 13
18. which is a sandstone
18 x 6 x 5 ins firmly set in
ground, marked 4 notches
on S. & 2 notches on N. edge
from which
a white pine 8 ins in dia. bra

East Lake Meridian.

S. 5½° E. 175 lks. dist. marked
T. 38 S. R. 6 W. S. 18 B. T.
a pine 8" diam. brs. N. 59° E.
160 lks. dist. marked T. 38 S.
R. 6 W. S. 7 B. T.
a red cedar 10" dia. brs S.
77° W. 25 lks dist., marked
T. 38 S. R. 7 W. S. 13. B. T.
a red cedar 5" dia. brs N. 55°
W. 180 lks dist. marked
T. 38 S. R. 7 W. S. 12. B. T.
thence
S. 89° 48' E. on a true line betw.
secs. 7 & 18.
with same var.
24.00 Descend gradually.
39.76 Set sandstone 16x10x4 ins 11 ins
in ground for ¼ sec. cor., marked
¼ on N. face, and raised
a mound of earth alongside.
51.80 Mountain about 600 ft
above cañon.
77.10 Cañon brs. N. 45° E.
79.76 The cor. to secs. 7, 8, 17 & 18

Subdivisions T. 38 S. R. 6

Land, level & rolling.
Soil 2d or 3d rate.
Timber pine & cedars on 79.76
Dense undergrowth, oak brush
on 79.76 chs.

North betw. secs. 7 & 8
Va. 15° 20' E.

2.40 Cañon brs N. 45° E.
12.30 Leave same.
19.58 Ridge about 600 ft above
cañon brs N E & S.W.
23.58 Descend cañon.
26.00 Cañon drs N.
40.00 Set sandstone 16x12x9 ins lying
in ground for 1/4 sec. cor. marked
1/4 on W. face, from which
a pine 18" dia. brs S. 30° W. 38 lks
dist, marked 1/4 S. B. T.
No other tree convenient to
mark.
46.48 Leave cañon and ascend
Ridge brs N E & S.W.

Sact Lake Meridian

55.00 Ridge, descends Swan's Creek.

65.00 Swans creek 20 lks wide 2 ft deep. runs N. 36° E.

80.00 Set sandstone 18 x 16 x 10 ins 12 ins in ground for cor. to secs. 5. 6 7 & 8. marked 5 notches on E & S. edges, from which

a pine 13" dia. brs. N. 6° W. 52 lks dist, marked T. 38 S. R 6 W. S. 6. B T.

a pine 12" dia. brs. N. 19° E. 69 lks dist, marked T. 38 S. R. 6 W. S. 5 B T.

No other tree convenient to mark.

Land, mountainous

Soil, 3d & 4th rate.

Timber pine on 80.00 chs.

Dense undergrowth oak brush on 80.00 chs.

No. Subdivisions T. 38 S. R. 6 W.

East on random line betw
secs. 5 & 8
Va. 15° 20' E.

40.00 Set temp 1/4 sec. cor.

80.02 Intersect N. & S. line 16 lks. S.
of cor. to secs. 4, 5, 8 & 9, thence
S. 89° 53' W. on a trued line betw
secs. 5 & 8 with same va.

9.80. Hill.

21.40. Enter lava rock

40.01 Set sandstone 18x16x9 ins 13 ins
in ground for 1/4 sec. cor. mark
1/4 on N. face, from which
a cottonwood 30" dia. bears S.
19° E. 26 lks. dist, marked 1/4 S.B.
No other tree convenient
to mark.

49.52 Spring Creek 20 lks wide 12 ins
deep runs N 30° E.

80.02. The cor. to secs. 5, 6, 7 & 8.
Land, rolling.
Soil, 2d rate.
Dense undergrowth oak brush
on 80.02 chs.

Saes Lake Meridian.

West on a random line betw secs. 6 & 7.

Va. 15° 20' E.

40.00 Set temp. 1/4 sec. cor.

79.63. Intersect W. bdy 14 lks. S. of cor. to secs. 1. 6. 7. & 12; which is a sandstone 24 x 10 x 6 ins firmly set in the ground; marked 5 notches on S. & 1 on N. edge, from which

a white pine 18" dia. brs S. 68° W. 112 lks dist. marked T. 38 S. R. 7 W. S. 12. B. T.

a red pine 10" dia. brs S. 17° E. 181 lks dist. marked T. 38 S. R. 6 W. S. 7 B. T.

a white pine 17" dia. brs N. 85° E. 172° lks dist. marked T. 38 S. R. 6 W. S. 6. B. T.

No other tree convenient to mark.

thence

S. 89° 54' E. on a true line betw sec. 6 & 7. with same var.

Subdivisions T. 38 S. R. 6 W.

39.63 Set sandstone 15x11x5 ins. 10 ins in ground for 1/4 sec. cor. marked 1/4 on N. face, and raised a mound of earth alongside.

57.50 Enter scattering timber

59.70 Plateau about 1000 ft above creek bra N E & S W.

79.63. The cor. to secs. 5. 6. 7 & 8
Land, mountainous
Soil, 4th rate
Timber, scattering pine on 22.13 chs
Dense undergrowth oak brush on 79.63 chs.

North on a random line betw secs. 5 & 6.
Va. 15° 20' E.

40.00 Set temp 1/4 sec. cor.

79.85. Intersect N. b'dy of Tp. 12 lks W. of cor. to secs 5. 6. 31 & 32 which is a volcanic rock 32x8x6 ins firmly set in the ground

Salt Lake Meridian.

with 1 notch W. & 5 on E. edges & raised a mound of stone alongside.
thence
S. 00° 55' W. on a true line betw secs. 5 & 6. with same var.

26.00 Enter timber.

39.85 Set lavastone 14x6x6 ins, 9 ins in ground for 1/4 sec. cor., marked 1/4 on W. face from which a pine 28" dia. brs. N. 28° E 19 lks dist, marked 1/4 S. B. T.
No other tree convenient to mark.

51.30 Plateau about 800 ft high brs. N E & S W.

79.85. The cor. to secs. 5. 6. 7 & 8.
Land, level & rolling.
Soil 2d rate.
Timber pine on 53.85 chs.
Dense undergrowth oak brush on 79.85 chs.

June 10. 1884.

Subdivisions T. 38 S. R. 6 W.

General Description.

This Tp. contains a variety of land consisting of valleys, ridges and mountains, the soil ranging from barren lava rock to rich loam. The soil is rich loam in the valley and along the streams capable of producing good crops without irrigation.

The mountain lands can except the lava beds along each side of Swans creek be classed as 1st & 2d rate soil, and is covered with an abundant growth of rich and nutritious grasses, and with fall plowing would produce crops without irrigation.

The mountains in many places are covered with pine & cedar timber, some being very large.

BOOK-A-202

Salt Lake Meridian.

dense undergrowth of oak sage brush and service berry cover the ridges.

This Tp. is very high being on the rim of the Great Salt Lake basin. Branches of the Rio Virgin and Sevier rivers, heading in this Tp. It is a splendid summer range, there being large herds of cattle, horses and flocks of sheep grazing every summer.

The applicant for survey Clarissa Hoyt's improvements consisting of a log house and corrals and a 4 acre field are located in S½ S.4. with a large fenced pasture extending into adjoining secs. 3 & 10.

Theodrach H. Richardson
U. S. Dep. Surveyor.

Blank

Page

BOOK-A-202

[4—LIST OF NAMES.]

A list of the names of the individuals employed by Shadrach M. Richardson *United States deputy surveyor, to assist in running, measuring, and marking the lines and corners described in the foregoing field notes of the survey of* the exterior and subdivision lines of township 38 south range 6 West *of the Salt Lake base and meridian in the Territory of Utah, showing the respective capacities in which they acted.*

Edward W. Webb, *Compassman.*
J. W. Allen, *Chainman.*
Joseph S. Tackett, *Chainman.*
, *Chainman.*
, *Chainman.*
R. Norwood, *Axeman.*
John E. Booth, *Axeman.*
, *Flagman.*

Blank

Page

[5.—FINAL OATHS OF ASSISTANTS.]

We hereby certify that we assisted Shadrach M Richardson United States deputy surveyor, in surveying all those parts or portions of the exterior and subdivision lines of township 38 South range 6 west

of the Salt Lake base and meridian in the Territory of Utah, as are represented in the foregoing field notes as having been surveyed by him and under his direction; and that said survey has been in all respects, to the best of our knowledge and belief, well and faithfully surveyed, and the corner monuments established according to the instructions furnished by the United States surveyor-general for Utah.

J. W. Webb, Compassman.

J. M. Allen, Chainman.

Joseph S. Tucker, Chainman.

, Chainman.

, Chainman.

, Axeman.

R Norwood, Axeman.

John E Cook, Flagman.

Subscribed and sworn to before me this 11 day of June 1884

H. A. Fowler
J. P.

Blank

Page

BOOK-A-202 325

U. S. SURVEYOR GENERAL'S OFFICE,

Salt Lake City, Utah, February 21st 1885

The foregoing field notes of the survey of the Subdivisions

Township No. 38 South *Range No.* 6 West

Executed by Shadrach M. Richardson

Under his *contract* No. 123 *of the* 19th

day of December 1883, *in the month of*

June 1884, *having been critically examined, the necessary corrections and explanations made, the said field notes, and the surveys they describe are hereby approved.*

Frd Salomon

U. S. Surveyor General for Utah.