

**Volume**

**#**

**R0481**

BOOK A-431

4-679 b

INDEX DIAGRAM.

Township 21 South, Range 14 West

	19	20	21	22	23	24					
30	6	87	5	71	4	59	8	48	2	38	1
	86		85		70		58		48		37
28	7	84	8	69	9	58	10	47	11	37	12
	83		82		69		56		46		36
27	18	81	17	68	16	55	15	45	14	35	13
	81		80		67		55		44		34
26	19	79	20	65	21	54	22	43	23	34	24
	78		76		64		53		42		33
26	20	75	20	63	28	52	27	41	26	32	25
	74		73		62		51		40		31
25	21	72	22	60	29	49	34	39	25	31	26

**Blank**

**Page**

BOOK A-481

4-679 b

INDEX DIAGRAM.

Township 21 South, Range 15 West  
 99                      100                      101                      102                      104                      105

101	6	185	5	165	4	152	3	138	2	123	1
	183		182		163		151		137		122
110	7	181	8	162	9	149	10	136	11	121	12
	179		178		161		148		134		120
109	18	177	17	160	16	147	15	132	14	118	13
	176		175		159		146		131		117
108	19	173	20	157	21	144	22	129	23	116	24
	172		171		157		143		128		115
107	20	170	29	155	28	142	27	127	26	114	25
	169		168		154		141		126		113
106	31	166	32	153	33	140	34	125	35	111	36

**Blank**

**Page**

3004 A-481

4-679 b

# INDEX DIAGRAM.

Township 22 South, Range 3 West

208	207	206	205	204	203						
0	262	5	247	4	237	3	290	2	216	1	202
201	260	247	236	225	216						
7	259	8	246	9	235	10	224	11	215	12	202
258	257	245	234	223	214						
13	256	17	244	16	233	15	222	14	214	13	20
255	254	243	232	221	213						
19	253	20	242	21	231	22	220	23	212	24	200
253	252	241	230	220	211						
25	251	25	240	26	229	27	219	26	210	25	199
250	249	239	228	218	209						
31	248	30	238	32	227	34	217	35	208	36	198

**Blank**

**Page**

BOOK A-481

4-679 b

INDEX DIAGRAM.

Township 23 South, Range 13 West

284	283	282	281	280	279						
6	339	5	323	4	313	3	302	2	293	1	278
338		337		322		312		301		292	
7	336	8	321	9	311	10	300	11	292	12	277
335		334		320		310		299		291	
18	333	17	319	16	309	15	299	14	290	13	277
332		331		318		308		298		289	
19	330	20	318	21	307	22	297	23	289	24	276
329		328		317		306		296		288	
20	327	29	316	28	305	27	295	26	287	25	275
326		325		315		304		295		286	
21	324	28	314	28	303	24	294	25	285	26	274

**Blank**

**Page**

BOOK A-481

4-679 b

INDEX DIAGRAM.

Township 24 South, Range 13 West  
 363      362      361      360      359      358

6	409	5	397	4	389	3	380	2	372	1	357
409		408		396		388		380		371	
7	407	8	395	9	387	10	379	11	370	12	356
406		406		395		386		378		370	
13	405	17	394	16	386	15	377	14	369	13	355
404		403		393		385		377		368	
19	403	20	392	21	384	22	376	23	367	24	354
401		401		392		383		375		367	
20	400	29	391	28	383	27	374	26	366	25	353
399		398		390		382		374		365	
21	398	22	389	23	381	24	373	25	364	26	352

BOOK A-481

4-879 b

INDEX DIAGRAM.

Township 21 South, Range 13 West

	422	423	424	425	426	427						
438	0	487	5	474	4	464	3	455	2	446	1	432
	487		486		473		463		454		446	
437	7	485	8	472	9	462	10	454	11	445	12	432
	484		483		471		462		453		444	
436	13	482	17	470	16	461	15	452	14	443	13	431
	482		481		470		460		451		443	
436	23	480	20	469	21	459	22	451	23	442	24	430
	479		478		468		459		450		441	
435	29	477	29	467	28	458	27	449	28	440	25	429
	477		476		466		457		448		440	
434	31	475	28	465	28	456	24	447	25	439	26	428

**Blank**

**Page**

BOOK A-481

RECEIVED

March 6, 1928

Department of the Interior

Public Survey Office

Salt Lake City, Utah

# FIELD NOTES

OF THE SURVEY OF THE

INDEPENDENT RESURVEY OF THE FOURTH STANDARD PARALLEL SOUTH THROUGH

RANGE 14 WEST; SURVEY OF THE WEST BOUNDARY AND SUBDIVISION OF

T. 21 S., R. 14 W.

Of the Salt Lake Base And Meridian,

In the State of Utah

EXECUTED BY

Willis W. Bandy

In the capacity of U. S. Surveyor, under instructions dated March 18, 1921,

issued by the United States Surveyor General to govern surveys included in

Group No. 100, which were approved by the Commissioner of the General Land

Office, March 25, 1921. Supplemental assignment instructions dated May 5, 1925.

Survey commenced August 3, 1925, XXXX

Survey completed October 11, 1925, 19

# INDEX DIAGRAM.

	Township 21 South					Range 14 West					
	5	6	7	8	9	10	11	12	13	14	
16	6	73	5	57	4	45	3	34	2	24	1
	72		71		56		44		34		23
14	7	70	8	55	9	44	10	33	11	23	12
	69		68		55		42		32		22
13	15	67	17	54	16	41	15	31	14	21	18
	67		66		53		41		30		20
12	19	65	20	51	21	40	22	29	23	20	24
	64		62		50		39		28		19
12	30	61	29	49	28	38	27	27	26	18	25
	60		59		48		37		26		17
11	31	58	32	46	33	35	34	25	35	17	36

DATE DIAGRAM

	10-2-25	10-2-25	10-3-25	10-3-25	10-3-25	10-3-25
10-1-25	10-2-25 6	10-10-25 5	10-10-25 4	10-10-25 3	10-10-25 2	10-10-25 1
8-4-25	8-18-25 7	8-18-25 8	8-19-25 9	10-8-25 10	10-8-25 11	10-9-25 12
8-4-25	8-13-25 18	8-13-25 17	8-13-25 16	8-7-25 15	10-8-25 14	10-9-25 13
8-3-25	8-11-25 19	8-11-25 20	8-17-25 21	10-7-25 22	10-7-25 23	10-6-25 24
8-3-25	8-11-25 30	8-11-25 29	8-15-25 28	8-15-25 27	9-26-25 26	10-6-25 25
8-3-25	8-10-25 31	8-10-25 32	8-12-25 33	8-12-25 34	8-25-25 35	9-26-25 36

All lines surveyed by Willis W. Bandy, U.S. Surveyor.

DESCRIPTION AND TESTS OF INSTRUMENTS.

Survey commenced August 3, 1925, and executed with Young and Sons solar transit No. 8513. The instrument is equipped with Smith solar attachment and full vertical circle. The horizontal limb has two verniers placed opposite to each other and reading to single minutes of arc, which is also the least count of the verniers of the latitude and declination arcs and vertical circle.

The instrument was approved for use on this survey by the Assistant Supervisor of Surveys, conditional upon satisfactory field tests in supplemental assignment

instructions dated May 5, 1925.

I examine the adjustments of the instrument and correct all errors. I then test the solar apparatus by comparing its indications resulting from solar observations made during a.m. and p.m. hours with a meridian determined by observations made on Polaris as follows.

Aug. 2, 1925: At my camp located near the SW. corner sec. 30, T. 21 S., R. 14 W., S.L.B. & Mer., Utah, in approximate latitude  $38^{\circ}57'$  N., longitude  $113^{\circ}27'$  W., at 10h 53.1mp.m. local mean time, I observe Polaris at eastern elongation, making four observations, two each with the telescope in direct and reversed positions, and mark the mean point in the line thus determined by a tack in a stake driven firmly in the ground, about 10 chains to the N. of my station.

Azimuth of Polaris at eastern elongation =  $1^{\circ}25'$ .

Aug. 3, 1925: I lay off the azimuth of Polaris,  $1^{\circ}25'$  to the west and mark the meridian thus determined by a tack in a stake, driven firmly in the ground, about 10 chains N. of my station.

At 9h 0m a.m. apparent time, with the instrument in the meridian, I set off  $17^{\circ}32\frac{1}{2}'$  N., on the declination arc;  $38^{\circ}57'$  N., on the latitude arc, and determine a meridian with the solar, which I find to agree with the true meridian.

At apparent noon, with the instrument in the meridian, I make a meridian observation of the sun for time and latitude, observing simultaneously the altitude of the sun's upper limb and the transit of the sun's west limb, reversing the telescope and observing simultaneously, the altitude of the sun's lower limb and the transit of the sun's east limb.

T. 21 S., R. 14 W.

Mean observed altitude= 68°33'30"  
 Reduced latitude= 38°57' N.  
 Mean watch time of observation= 12h 7m 3s  
 Watch fast of local mean time= 0h 1m 0.3s

At apparent noon, with the instrument in the meridian and the latitude arc unchanged, I find the reading of the declination arc to be 17°30' N., which agrees with the computed declination of the sun.

At 3h 0m p.m. apparent time, with the instrument in the meridian and the latitude arc unchanged, I set off 17°28' N., on the declination arc, and determine a meridian with the solar, which I find to agree with the true meridian.

As all the solar observations made during the usual hours of solar work, come within 1' of the true meridian, I conclude that the instrument is in satisfactory adjustment.

The instrument was kept in good adjustment throughout the progress of this survey, frequent tests being made on the meridian determined by observations made on Polaris as heretofore described.

Near the completion of the survey of this township, I make a final test of the instrument as follows.

Oct. 10, 1925: With the instrument in the meridian established by observations made on Polaris as heretofore described, at 11:30 a.m. apparent time, I set off 38°57' N., on the latitude arc; 6°36' S., on the declination arc; and determine a meridian with the solar which I find to agree with the true meridian.

At apparent noon, with the instrument in the meridian and the latitude arc unchanged, I find the reading of the declination arc to be 6°39' S., which agrees with the computed declination of the sun.

At 3h 30m p.m. apparent time, with the instrument in the meridian and the latitude arc unchanged, I set off 6°41' S., on the declination arc; and determine a meridian with the solar, which I find to agree with the true meridian.

As all the solar observations made during the usual hours of solar work, come within 1' of the true meridian, I conclude that the instrument is still in satisfactory adjustment.

#### MEASUREMENTS.

Unless otherwise specified all measurements are made with Lallie steel tapes 5 chains in length, compared with a Lufkin standard steel tape 1 chain in length and found correct. The measurements are made on the slope, the vertical angles determined, and the slope measurements properly reduced to true horizontal distances.

#### METHOD AND ORDER OF PROCEDURE.

The fourth standard parallel south, forms the north boundary of this township and was reported as having been surveyed by Andrew J. Stewart Jr. in year 1882. No trace of this survey was found, therefore an independent resurvey was made of this parallel.

The south boundary was surveyed by Elliot Bird, U.S. Transitman in year 1918 under group 74, Utah, the course being S.  $89^{\circ}56'$  W., and the distance 477.84 chs., which agrees with the record course and distance of this boundary.

The east boundary was surveyed under group 101, Ut., and run north from the corner Ts. 21 and 22 S., Rs. 13 and 14 W., to an intersection with the standard parallel.

The west boundary of the township was run in the same manner as the east boundary.

The township was subdivided in the regular manner, from the south to the north and east to the west.

INDEPENDENT RESURVEY FOURTH STANDARD PARALLEL SOUTH  
THROUGH E. 14 W.

Chains

From the standard cor. T. 20 S., Rs. 14 and 15 W., which is an iron post, 3 ins. diam., set 27 ins. in the ground, with brass cap marked.

SC  
T20S  
R15W R14W  
S36 S31

1925

From which,

A juniper, 8 ins. diam., bears N. 61°30' W., 200 lks. dist., marked T20S R15W S36 SC BT.

No other bearing tree available.

Thence,

East, along S. bdy. sec. 31, on independent resurvey line.

Descend gradually over rolling bench land through scattered undergrowth.

10.02 Point for the closing cor. T. 21 S., Rs. 14 and 15 W., hereinafter described.

37.80 Road, bears N. 20° W. and S. 20° E.

40.00 On rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 6 ins. in the ground to solid rock and 24 ins. in a mound of stone, for standard  $\frac{1}{4}$  sec. cor., with brass cap marked.

SC  
 $\frac{1}{4}$  S31

1925

Deposit a limestone, 6 x 4 x 2 ins., at base of post, marked with a cross (X).

48.00 Ravine, 120 ft. below the standard township cor., drains N. 20° W., head 8 chains to the S.

50.00 Base of abrupt ascent over W. slope of spur, bears N. 20° W. and S. 20° E.

80.00 On abrupt W. slope of spur near top, 470 ft. above ravine.

Set an iron post, 3 ft. long, 2 ins. diam., 12 ins. in the ground to solid rock and 18 ins. in a mound of stone, for standard cor. secs. 31 and 32, with brass cap

marked

INDEPENDENT RESURVEY FOURTH STANDARD PARALLEL SOUTH THROUGH R. 14 W.

Chains

S	C
T20S	R14W
S32	S33

1925

Deposit a limestone; 6 x 4 x 2 ins., at base of post, marked with a cross (X).

Land, broken, with a general northerly exposure and drainage.

Soil, shallow rocky clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

East, along the S. bdy. sec. 33.

Over rolling hills through scattered undergrowth.

7.15 Point for the closing cor. secs. 4 and 5, T. 21 S., R. 14 W., hereinafter described.

32.90 Ravine, 240 ft. below cor., drains SE.; ascend gradual SW. slope.

40.00 At base of spur, bears W. and SE.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for standard sec. cor., with brass cap marked.

SC
<u>1</u> S33

1925

Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor.

56.50 Rocky spur, 120 ft. above ravine, projects S., 6.00 chs. dist.

69.00 Ravine, 160 ft. below spur, drains S.

75.20 The S. point of rocky spur, 20 ft. high.

80.00 On W. side of ravine.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for standard cor. secs. 33 and 34, with brass cap marked.

INDEPENDENT RESURVEY FOURTH STANDARD PARALLEL SOUTH  
THROUGH R. 14 W.

Chains

	S	C
T20S	R14W	
<u>S33</u>	<u>S34</u>	

1925

Raise a mound of stone, 2 ft. base, 1 1/2 ft. high N. of cor.  
Land, rolling and broken, with a general southeasterly  
exposure and drainage.

Soil, shallow rocky clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain  
rush and yellow top.

No timber.

Fair grazing.

East, along the S. bdy. sec. 34.

Over broken hills through scattered undergrowth.

.20 Ravine, drains S. 10° E.

6.92 Point for the closing cor. secs. 3 and 4, T. 21 S.,  
R. 14 W., hereinafter described.

14.80 Low spur, projects S., 8.00 chs. dist.

22.00 Base of spur, bears N. and S.

27.40 Wash, 40 lks. wide, 2 ft. deep, course N.

40.00 On rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the  
ground, for standard 1/4 sec. cor., with brass cap marked.

	SC
<u>1/4</u>	<u>S34</u>

1925

Raise a mound of stone, 2 ft. base, 1 1/2 ft. high N. of cor.

76.30 Road, bears N. 10° W. and S. 10° E. Tule Valley to Blackrock

78.00 Wash, 35 lks. wide, 2 ft. deep, course N. 30° E.

80.00 On rolling land.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in  
the ground, for standard cor. secs. 34 and 35, with  
brass cap marked.

	S	C
T20S	R14W	
<u>S34</u>	<u>S35</u>	

1925

INDEPENDENT RESURVEY FOURTH STANDARD PARALLEL SOUTH  
THROUGH R. 14 W.

Claims

Land, broken and rolling, with a general southeasterly and northeasterly exposure and drainage.

Soil, shallow and deep clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

East, along the S. bdy. sec. 35.

Over rolling bench land through scattered undergrowth.

7.30 Point for the closing cor. secs. 2 and 3, T. 21 S., R. 14 W., hereinafter described.

40.00 On rolling land.

Set an iron post, 3 ft. long, 1 ins diam., 27 ins. in the ground, for standard 1/4 sec. cor., with brass cap marked.

SC  
1/4 S35

1925

Raise a mound of stone, 2 ft. base, 1 1/2 ft. high N. of cor.

63.00 Bottom of swale, drains N. 20° W.

80.00 On rolling land.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for standard cor. secs. 35 and 36, with brass cap marked.

S | C  
T20S | R14W  
S35 | S36

1925

Raise a mound of stone, 2 ft. base, 1 1/2 ft. high N. of cor.

Land, rolling, with a general northerly exposure and drainage.

Soil, deep clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

INDEPENDENT RESURVEY SOURCE STANDARD  
THROUGH R. 14 W.

Chains

East, along the S. bdy. sec. 36.

Over rolling land through scattered undergrowth.

7.80 Point for the closing cor. secs. 1 and 2, T. 21 S.,

R. 14 W., hereinafter described.

37.15 Road, bears  $60^{\circ}$  E. and S.  $60^{\circ}$  W. Clear Lake to base.

49.00 On rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for standard 1 sec. cor., with brass cap marked

SC  
1/4 S36

1925

Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor

Also, dig pits, 18 x 18 x 12 ins., E. and W. of post,

3 ft. dist.

67.15 Draw, chains 37.

1.00 The standard cor. T. 20 S., Rs. 13 and 14 W., which is an

iron post, 3 ins. diam., with brass cap, set, marked

and witnessed as described in the official records

of the survey T. 21 S., R. 13 W.

3.15 The closing cor. T. 21 S., Rs. 13 and 14 W., which is an

iron post, 3 ins. diam., with brass cap, set, marked

and witnessed as described in the official records of

the survey T. 21 S., R. 13 W.

Land, rolling, with a general southwesterly exposure

and drainage.

Soil, deep clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain

rush and yellow top.

No timber.

Fair grazing.

## SURVEY WEST BOUNDARY T. 21 S., R. 14 W.

## Chains

From the cor. Ts. 21 and 22 S., Rs. 14 and 15 W., which is an iron post, 3 ins. diam., with brass cap, set, marked and witnessed as described in the official records of the survey T. 22 S., R. 14 W.

North, bet. secs. 31 and 36, along the W. bdy. of the township.

Over rolling SE. slope of bench land through scattered undergrowth.

40.00 On rolling land.

Set an iron post, 4 ft. long, 1 in. diam., 12 ins. in the ground to solid rock and 10 ins. in a mound of stone, for sec. cor., with brass cap armed.

	3	
S36		S31
1915		

Deposit a limestone, 6 x 6 x 1 in., at base of post, marked with a cross (X).

80.00 On rolling land.

Set an iron post, 4 ft. long, 1 in. diam., 12 ins. in the ground, for cor. secs. 25, 30, 31 and 36, with brass cap armed.

	T21S		
	R15W		R14W
	S25		S30
S36		S31	
1915			

Raise a mound of stone, 2 ft. base, 1½ ft. high W. of cor. Land, rolling, with a general southeasterly exposure and drainage.

Soil, shallow rocky clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

SURVEY, WEST BOUNDARY T. 21 S., R. 14 W.


Chains

on 14, 15

North, bet. secs. 25 and 30.  
Over rolling land through scattered undergrowth.

40.00 On rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked




Raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$  ft. high, W. of cor.

42.50 Low divide which forms the divide between the N. and S. drainage, bears E. and W.

53.00 Shallow draw, drains E.

80.00 On rolling land.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. secs. 19, 24, 25 and 30, with brass cap marked.



Raise a mound of stone, 3 ft. base, 1 $\frac{1}{2}$  ft. high W. of cor. Land, rolling with a general southerly and northerly exposure and drainage.

Soil, shallow rocky clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

North, bet. secs. 19 and 24.

Over rolling bench land through scattered undergrowth.


15.00 Wash, 30 lks. wide, 2 ft. deep, course N. 70° E.

40.00 On rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

## SURVEY WEST BOUNDARY T. 21 S., R. 14 W.

Chains




Raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high W. of cor.

58.00 Shallow draw, drains E.

80.00 On rolling land.

Set an iron post, 3 ft. long, 2 ins. diam., 18 ins. in the ground to solid rock and 12 ins. in a mound of stone for cor. secs. 13, 18, 19 and 24, with brass cap marked.



From which,

A juniper, 10 ins. diam., bears N.  $33^{\circ}$  E., 230 lks. dist., marked T21S R14W S18 BT.

A juniper, 8 ins. diam., bears S.  $6^{\circ}30'$  E., 170 lks. dist., marked T21S R14W S19 BT.

A juniper, 8 ins. diam., bears S.  $50^{\circ}$  W., 248 lks. dist., marked T21S R15W S24 BT.

No NW. bearing tree available.

Deposit a limestone, 4x 4 x 2 ins., at base of post, marked with a cross (X).

Land, rolling, with a general easterly exposure and drainage.

Soil, shallow rocky clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

Timber, a few scattered scrub juniper on N. portion of mile.

Fair grazing.

North, bet. secs. 13 and 18.

Over rolling hills through scattered undergrowth.


40.00 On rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 16 ins. in the

SURVEY WEST BOUNDARY T. 21 S., R. 14 W.

Chains


ground to solid rock and 14 ins. in a mound of stone,  
for  $\frac{1}{4}$  sec. cor., with brass cap marked.



Deposit a limestone, 6 x 4 x 2 ins., at base of post,  
marked with a cross (X).

- 46.00 Ravine at base of spur, drains NE.
- 58.00 Low spur, 30 ft. high, projects E.
- 65.00 Base of spur, bears E. and W.
- 80.00 On rolling land.

Set an iron post, 3 ft. long, 2 ins. diam., 18 ins. in  
the ground to solid rock and 12 ins. in a mound of stone  
for cor. secs. 7, 12, 13 and 18, with brass cap marked.



Deposit a limestone, 5 x 3 x 2 ins., at base of post,  
marked with a cross (X).

Land, rolling, with a general easterly exposure and  
drainage.

Soil, shallow rocky clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain  
rush and yellow top.

No timber.

Fair grazing.

North, bet. secs. 7 and 12.


Over rolling hills through scattered undergrowth, and  
timber.

- 40.00 On rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the  
ground to solid rock and 18 ins. in a mound of stone,  
for  $\frac{1}{4}$  sec. cor., with brass cap marked.

SURVEY WEST BOUNDARY T. 21 S., R. 14 W.

Chains



From which,


A juniper, 6 ins. diam., bears S. 88° E., 107 lks.  
dist., marked  $\frac{1}{4}$  S7 BT.

A juniper, 4 ins. diam., bears N. 59°30' W., 310 lks.  
dist., marked  $\frac{1}{4}$  S12 BT.

67.00 Shallow draw, drains SE.

80.00 On rolling land.

Set an iron post, 3 ft. long, 2 ins. diam., 20 ins. in the ground to solid rock and 10 ins. in a mound of stone for cor. secs. 1, 6, 7 and 12, with brass cap marked.



From which,

A juniper, 4 ins. diam., bears N. 46° E., 288 lks.  
dist., marked T21S R14W S6 BT.

A juniper, 6 ins. diam., bears S. 60°15' E., 289 lks.  
dist., marked T21S R14W S7 BT.

A juniper, 10 ins. diam., bears N. 39°30' W., 503 lks.  
dist., marked BT. Tree too scrubby for other marks.

No SW. bearing tree available.

Deposit a limestone, 8 x 6 x 4 ins., at base of post, marked with a cross (X).

Land, rolling, with a general easterly exposure and drainage.

Soil, shallow rocky clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

Timber, scattered scrub juniper and pinon.

Fair grazing.

SURVEY WEST BOUNDARY T. 21 S., R. 14 W.

Chains


North, bet. secs. 1 and 6.

Over rolling bench land through scattered undergrowth and timber.

35.00 Low ridge, bears E. and W.

40.00 On rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.




Raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high W. of cor. No suitable bearing trees available.

57.00 Intersect the fourth standard parallel south, East, 10.02 chs. dist. from the standard cor. T. 20 S., Rs. 14 and 15 W., heretofore described.

at point of intersection.

Set an iron post, 3 ft. long, 3 ins. diam., 27 ins. in the ground, for closing cor. T. 21 S., R<sub>s</sub>. 14 and 15 W., with brass cap marked



From which,

A juniper, 8 ins. diam., bears S. 7° W., 491 lks.

dist., marked BT. Tree too scrubby for other marks.

Raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high S. of cor. Land, rolling, with a general easterly exposure and drainage.

Soil, shallow rocky clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

Timber, scattered scrub juniper.

Fair grazing.

SUBDIVISION T. 21 S., R. 14 W.


Chains

From the cor. secs. 1, 2, 35 and 36, on the S. bdy. of the township, which is an iron post, 2 ins. diam., with brass cap, set, marked and witnessed as described in the official records of the survey T. 22 S., R. 14 W. N. 0°01' W., bet. secs. 35 and 36.

Over rolling land through scattered undergrowth.

40.00 On rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for ¼ sec. cor., with brass cap marked.




Dig pits, 18 x 18 x 12 ins., N. and S. of post, 3 ft. dist.

55.00 Road, bears N. 20° W. and S. 20° E.

80.00 On clay flat.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for cor. secs. 25, 26, 35 and 36, with brass cap marked.



Dig pits, 18 x 18 x 12 ins., in each sec., 3 ft. dist. from post.

Land, rolling and level clay flat with a general easterly and westerly exposure and drainage.

Soil, shallow and deep clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

N. 89°56' E., on random line bet. secs. 25 and 36.

40.00 Set temp. ¼ sec. cor.

80.20 Intersect the E. bdy. of the township, 9 lks. N. of the cor. secs. 25, 30, 31 and 36, which is an iron post,

SUBDIVISION T. 21 S., R. 14 W.

Chains

2 ins. diam., with brass cap, set, marked and witnessed as described in the finished notes of the survey T. 21 S., R. 13 W.


Thence,

West, on true line bet. secs. 25 and 36.

Over rolling land through scattered undergrowth.

40.10 On rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.



1925

Raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, N. of cor.

48.70 Enter clay flat, bears N. and S.

80.20 The cor. secs. 25, 26, 35 and 36.

Land, rolling and level.

Soil, deep sand and clay loam on E. portion of mile; deep clay on W. portion; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.


Fair grazing.

N. 0°01' W., bet. secs. 25 and 26.

Over level clay flat or hard pan.

40.00 On level clay flat.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.



Raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high W. of cor.

80.00 On level clay flat.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. secs. 23, 24, 25 and 26, with brass cap marked.

SUBDIVISION T. 21 S., R. 14 W.

Chains

T21S	R14W
S23	S24
S26	S25

1925

Raise a mound of stone, 2 ft. base, 1½ ft. high W. of cor.  
Land, level clay flat.

Soil, deep clay; 3rd rate.

Undergrowth, a few scattered shadscale.

No timber.

Poor grazing.

East, on random line bet. secs. 24 and 25.

40.00 Set temp. ¼ sec. cor.

80.20 Intersect the E. bdy. of the township at the cor. secs.

19, 24, 25 and 30, which is an iron post, 1 in. diam.,  
with brass cap, set, marked and witnessed as described  
in the finished notes of the survey T. 21 S., R. 13 W.

Thence,

West, on true line bet. secs. 24 and 25.

Descend gradual W. slope of rolling land through scattered  
undergrowth.

28.20 Enter clay flat, bears N. and W. 20° W.

40.10 On clay flat.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the  
ground, for ¼ sec. cor., with brass cap marked.

¼	S24
	S25

1925

Raise a mound of stone, 2 ft. base, 1½ ft. high W. of cor.

80.20 The cor. secs. 23, 24, 25 and 26.

Land, rolling W. slope and level clay flat.

Soil, deep clay and deep sand and clay; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain  
rush and yellow top.

No timber.

Fair grazing.

SUBDIVISION T. 21 S., R. 14 W.


Chains

N. 0°01' W., bet. secs. 23 and 24.

Over level clay flat through scattered undergrowth.

40.00 On level land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.




Raise a mound of stone, 3 ft. base,  $1\frac{1}{2}$  ft. high W. of cor.

58.00 Leave level clay flat and enter rolling land, bears N. 20° E. and S. 20° W.

60.00 On rolling land.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. secs. 13, 14, 23 and 24, with brass cap marked.



Raise a mound of stone, 3 ft. base,  $1\frac{1}{2}$  ft. high W. of cor. Land, level and rolling.

Soil, deep clay and sand; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

East, on random line bet. secs. 13 and 24.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

80.18 Intersect the E. bdy. of the township, 16 lks. S. of the cor. secs. 13, 18, 19 and 24, which is an iron post, 2 ins. diam., with brass cap, set, marked and witnessed as described in the official records of the survey T. 21 S., R. 13 W.

Thence,

S. 89°53' W., on true line bet. secs. 13 and 24.

W SUBDIVISION T. 21 S., R. 14 W.


20.00

Over rolling land through scattered undergrowth.

20.00 Enter clay flat, bears N. and S.

40.09 On clay flat.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.



1925

Raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high N. of cor.

71.00 Leave clay flat and enter rolling land, bears N. and S. 20° W.

80.18 The cor. secs. 13, 14, 23 and 24.

Land, level and rolling.

Soil, deep sand and clay loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.


Fair grazing.

N. 0°01' W., bet. secs. 13 and 14.

Over rolling land through scattered undergrowth.

40.00 On rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.



1925

Dig pits, 18 x 18 x 12 ins., N. and S. of post, 3 ft. dist.

41.00 Enter clay flat, bears NW. and SE.

45.00 Road, bears N. 70° E. and W.

80.00 On clay flat.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. secs. 11, 12, 13 and 14, with brass cap marked.

SUBDIVISION T. 21 S., R. 14 W.

Chains

T21S	R14W
S11	S12
S14	S13

1925

Raise a mound of stone, 2 ft. base, 1½ ft. high W. of cor.

Land, level and rolling.

Soil, deep sand and clay loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain  
rush and yellow top.

No timber.

Fair grazing.

89°53' E., on random line bet. secs. 12 and 13.

40.00 Set temp. sec. cor.

80.36 Intersect the N. E. cor. of the township, 9 lbs. S. of the  
cor. secs. 11, 12, 13 and 14, which is an iron post,  
2 ins. diam., with brass cap, set, marked and witnessed  
as described in the official records of the survey  
T. 21 S., R. 14 W.

Thence,

89°49' W., on true line bet. secs. 12 and 13.

Over rolling land through scattered undergrowth.

40.13 On rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the  
ground, for a sec. cor., with brass cap marked.

S12
¼
S13

1925

Raise a mound of stone, 2 ft. base, 1½ ft. high N. of cor.

49.00 Enter clay flat, bears NW. and SE.

80.36 The cor. secs. 11, 12, 13 and 14.

Land, rolling and level.

Soil, deep clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain  
rush and yellow top.

No timber.

SUBDIVISION T. 21 S., R. 14 W.

Chains


N. 0°01' W., bet. secs. 11 and 12.

Over level clay flat through scattered undergrowth.

15.00 Leave clay flat and enter rolling land, bears E. and W.

40.00 On rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/4 sec. cor., with brass cap marked.




Dig pits, 18 x 18 x 12 ins., N. and S. of post, 3 ft. dist.

60.00 Bottom of swale, drains N. 20° W.

80.00 On rolling land.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. secs. 1, 2, 11 and 12, with brass cap marked.



Raise a mound of stone, 2 ft. base, 1 1/2 ft. high W. of cor. Land, rolling and level.

Soil, deep clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

N. 89°49' E., on random line bet. secs. 1 and 12.

40.00 Set temp. 1/4 sec. cor.

80.40 Intersect the E. bdy. of the township, 16 lks. S. of the cor. secs. 1, 6, 7 and 12, which is an iron post, 2 ins. diam., with brass cap, set, marked and witnessed as described in the official records of the survey T. 21 S., R. 13 W.

Thence,

S. 89°42' W., on true line bet. secs. 1 and 12.

SUBDIVISION T. 21 S., R. 14 W.

Chains

Over rolling land through scattered undergrowth.

40.20 On rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for sec. cor., with brass cap marked.



1925

Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor.

80.40 The cor. secs. 1, 2, 11 and 12.

Land, rolling, with a general westerly exposure and drainage.

Soil, deep clay and sand loam; 3rd rate.

Undergrowth, scattered barebrush, shadscale, mountain

rush and yellow top.

No timber.


No grazing.

N. 0°01' W., bet. secs. 1 and 2 on true line.

Over rolling land through scattered undergrowth.

40.00 On rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for sec. cor., with brass cap marked.



1925

Dig pits, 18 x 18 x 12 ins., N. and S. of post 3 ft. dist.

40.61 Road, bears N. 60° E. and S. 60° W.

56.14 Intersect the fourth standard parallel south, East, 7.80

chs. dist. from the standard cor. secs. 35 and 36,

T. 20 S., R. 14 W.

At point of intersection.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for closing cor. secs. 1 and 2, with brass cap marked

SUBDIVISION T. 21 S., R. 14 W.

Chains

T20S R14W  
 836  
 S2 | S1  
 T21S | R14W  
 C C

1925

Raise a mound of stone, 2 ft. base, 1½ ft. high S. of cor. Land, rolling with a general southwesterly exposure and drainage.

Soil, deep clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadycane, mountain rush and yellow top.

No timber.

Fair grazing.

From the cor. secs. 2, 3, 34 and 35, on the S. bdy. of the township, which is an iron post, 2 ins. diam., with brass cap, set, marked and witnessed as described in the official records of the survey T. 22 S., R. 14 W. N. 0°01' 4., bet. secs. 34 and 35.

Ascend gradually over broken mountainous land through scattered undergrowth and timber.

4.00 Rocky spur, projects S. 30° E.; continue ascent along broken E. slope.

17.60 Head of ravine, drains E.

40.00 On broken E. slope.

Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground to solid rock and 10 ins. in a mound of stone, for ¼ sec. cor., with brass cap marked.

4  
 S34 | S35  
 1925

Deposit a limestone, 8 x 6 x 4 ins., at base of post, marked with a cross (X).

No suitable bearing trees available.

40.90 Spur, projects N. 80° E.; continue ascent.

70.10 Ravine, drains E.

1/2 SUBDIVISION T. 21-S., R. 14 W.

- 17.00 Base of abrupt ascent over broken SE. slope of rocky spur, bears N. and S.
- 30.43 The rock sacs. 26, 27, 34 and 35, 880 ft. above the  $\frac{1}{4}$  sec. cor.
- Land, level, rolling, and broken, with a general easterly exposure and drainage.
- Soil, deep and shallow clay and sand loam; 3rd rate.
- Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.
- No timber.
- Fair grazing.
- 
- N. 0°01' W., bet. secs. 26 and 27.
- Descend abrupt, broken W. slope of spur through scattered undergrowth.
- 22.30 Ravine, 600 ft. below spur or sec. cor., drains N. 80° E.; ascend abrupt S. slope of spur.
- 38.80 Spur, 400 ft. above ravine, projects E.; descend abrupt N. slope of spur.
- 40.00 On broken N. slope of surfacerock, 40 ft. below top of spur; mark a cross (X), over which.
- Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in a mound of stone, for  $\frac{1}{4}$  sec. cor., with brass cap marked
- $\frac{1}{4}$   
 S27 | S26  
 1925
- 52.00 Ravine, 100 ft. below the  $\frac{1}{4}$  sec. cor., drains E., heads about 5.00 chs. to the W.; ascend abrupt S. slope of spur.
- 63.60 Rocky spur, 160 ft. above ravine, projects E.; descend gradual broken N. slope,
- 64.00 Head of ravine, drains N. 70° E.; ascend abrupt S. slope.
- 70.00 Rocky spur, 60 ft. above head of ravine, projects NE.; descend abrupt NW. slope.
- 80.00 On abrupt NW. slope, of surfacerock, 200 ft. below spur;

SUBDIVISION T: 21 S., R. 14 W.

Chains

mark a cross (X), over which:

Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in a mound of stone, for cor. secs. 22, 23, 26 and 27, with brass cap marked.

T21S	R14W
S22	S23
S27	S26

1925

Land, broken and mountainous with a general easterly exposure and drainage.

Soil, shallow rocky clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

N. 89°51' E., on random line bet. secs. 23 and 26.

40.00 Set temp. sec. cor.

80.50 Intersect the cor. secs. 23, 24, 25 and 26.

Thence,

S. 89°51' W., on true line bet. secs. 23 and 26.

Over level clay flat through scattered undergrowth.

6.10 Road, bears N. and S.

20.30 Leave clay flat and enter rolling bench land, bears N. 20° E. and S.

30.00 Base of abrupt ascent over SE. slope of spur, bears N. 20° E. and S.

40.25 On broken SE. slope of spur.

Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground, to solid rock and 20 ins. in a mound of stone, for 1/4 sec. cor., with brass cap marked.

S23
1/4
S26

1925

Deposit a limestone, 6 x 4 x 2 ins., at base of post, marked with a cross (X).

SUBDIVISION T. 21 S., R. 14 W.

- 54.40 Rocky spur, 710 ft. above clay flat, projects NE.; descend abrupt NW. slope.
- 62.20 Ravine, 120 ft. below spur, drains NE., heads about 17.00 chs. to the SW.; ascend abrupt SE. slope.
- 77.50 Spur, 270 ft. above ravine, projects NE.; descend abrupt NW. slope.
- 80.50 The cor. secs. 22, 23, 26 and 27, 100 ft. below spur. Land, E. 20.30 chs., level clay flat; remainder of mile broken and mountainous with a general easterly exposure and drainage.  
Soil, shallow and deep rocky clay and sand loam; ord. rate. Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.  
No timber.  
Fair grazing.

N. 0°01' W., bet. secs. 22 and 23.


Descend abrupt NW. slope of mountainous land through scattered undergrowth.

- 35.00 Base of abrupt descent, bears NE. and SW.; thence over rolling land.

- 36.90 Wash, 20 lks. wide, 1 ft. deep, 540 ft. below cor., course NE.

- 40.00 On rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground to solid rock and 10 ins. in a mound of stone, for  $\frac{1}{4}$  sec. cor., with brass cap marked.



Deposit a limestone, 8 x 6 x 4 ins., at base of post, marked with a cross (X).

- 64.00 Road, bears NE. and SW.
- 74.00 Wash, 30 lks. wide, 4 ft. deep, course NE.
- 80.00 On rolling land.  
Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in

SUBDIVISION 7. 12 1/2 S. 14 W.

Chains

the ground for cor. secs. 14, 15, 22 and 23, with  
brass cap marked.

T21S	R14W
S15	S14
S22	S23

1925

Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.  
land, broken and rolling, with a general northeasterly  
exposure and drainage.

Soil, shallow rocky clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain  
rush and yellow top.

Water.

Wear grazing.

20.51' E., on random line bet. secs. 14 and 23.

at temp. sec. cor.

25.5 Intersect the . and S. line, 12 lks. S. of the cor. sec.  
14, 15, 23 and 24.

thence,

31.40' W., on true line bet. secs. 14 and 23.

over rolling land through scattered undergrowth.

34.10 Road, bears S. 20° W. and S. 20° E.

40.25 rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the  
ground, for 1/4 sec. cor., with brass cap marked.

314
1/4
323

1925

Raise a mound of stone, 2 ft. base, 1 1/2 ft. high N. of cor

51.30 Wash, 30 lks. wide, 1 ft. deep, course N. 85° E.

64.00 Road, bears E. and SW:

74.40 Wash, 40 lks. wide, 2 ft. deep, course NE.

80.50 The cor. secs. 14, 15, 22 and 23.

land, rolling, with a general northeasterly exposure

Drainage.

SUBDIVISION T. 21 S., R. 14 W.


Chains

Soil, deep clay and sand loam; 3rd rate.  
 Undergrowth, scattered sagebrush, shadscale, mountain  
 rush and yellow top.  
 No timber.  
 Fair grazing.

N. 0°01' W., bet. secs. 10 and 15.

Over broken mountainous land through scattered undergrowth.

- 3.50 Base of spur, bears S. and SE.
- 27.40 Spur, 570 ft. above cor., projects S. 20° E.; descend  
 gradually over broken NE. slope.
- 37.20 Head of ravine, 60 ft. below spur, drains SE.; ascend  
 abrupt SW. slope.
- 40.00 On abrupt SW. slope.  
 Set an iron post, 3 ft. long, 1 in. diam., 6 ins. in the  
 ground to solid rock and 24 ins. in a mound of stone,  
 for a sec. cor., with brass cap marked.



Deposit a limestone, 8 x 6 x 6 ins., at base of post,  
 marked with a cross (X).

- 44.10 Spur, 130 ft. above ravine, projects S. 70° E.; descend  
 abrupt NE. slope.
- 50.50 Ravine, 130 ft. below spur, drains S. 70° E.; ascend  
 abrupt SW. slope.
- 56.60 Rocky spur, 30 ft. above ravine, projects E.; descend  
 abrupt N. slope.
- 69.70 Ravine, 410 ft. below spur, drains N. 70° E., ascend  
 abrupt SE. slope.
- 80.00 On top of rocky spur, 110 ft. above ravine, projects  
 N. 70° E.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in  
 the ground, for cor. secs. 10, 11, 14 and 15, with  
 brass cap marked.

SUBDIVISION; T. 21 S., R. 14 W.

Chains

T21S	R14W
S10	S11
S15	S14

1925

Raise a mound of stone, 3 ft. base, 2 ft. high W. of cor. Land, broken and mountainous with a general southeasterly exposure and drainage.

Soil, shallow rocky clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

N. 89°45' E., on random line bet. secs. 11 and 14.

40.00 Set temp. 1/4 sec. cor.

30.50 Intersect the N. and S. line, 12 lks. N. of the cor. secs. 11, 12, 13 and 14.

Thence,

S. 39°51' W., on true line bet. secs. 11 and 14.

Over level clay flat.

35.00 Dim road, bears N. 20° W. and S. 20° E.

37.30 Leave level clay flat and ascend gradual E. slope, bears N. 20° W. and S. 20° E.

40.25 At base of sour, bears N. and S.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/4 sec. cor., with brass cap marked.

1/4	S11
	S14

1925

Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor. Thence ascend abruptly over broken E. face of brown quartzite ledges.

46.35 Top of ledges and sour, 360 ft. above clay flat, projects N.; descend abrupt W. slope.

63.70 Ravine, 200 ft. below sour, drains N. 30° E.; ascend abrupt SE. slope.

30.50 The cor. secs. 10, 11, 14 and 15, 300 ft. above ravine.  
 Land, level clay flat and broken ledges, with a general  
 northeasterly exposure and drainage.  
 Soil, deep and shallow clay and sand loam; 3rd rate.  
 Undergrowth, scattered sagebrush, shadscale, mountain  
 brush and yellow top on W. portion of mile.  
 No timber.  
 Fair grazing.

N. 0°01' W., bet. secs. 10 and 11.


Descend abrupt NW. slope from top of spur, through  
 scattered undergrowth.

13.50 Base of spur, bears NE. and SW.; thence descend gradual  
 NW. slope.

17.90 Ravine, 370 ft. below cor., drains NE.; thence over  
 rolling bench land.

40.00 On rolling bench land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in  
 the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.




Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

46.80 Draw, drains E.

80.00 On rolling bench land.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in  
 the ground, for cor. secs. 2, 3, 10 and 11, with brass  
 cap marked.



Raise a mound of stone, 3 ft. base, 2 ft. high W. of cor.

Land, broken and rolling, with a general northeasterly  
 exposure and drainage.


Soil, shallow and deep clay and sand loam; 3rd rate.

## SUBDIVISION, T. 21 S., R. 14 W.

Chains	DISTANCE
	Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top. No timber. Fair grazing.
40.00	N. 39°51' E., on random line bet. secs. 2 and 11. Set temp. $\frac{1}{4}$ sec. cor.
30.50	Intersect the N. and S. line, 12 lks. S. of the cor. secs. 1, 2, 11 and 12. Thence, S. 39°46' W., on true line bet. secs. 2 and 11. Over rolling bench land through scattered undergrowth.
8.50	Bottom of wide swale, drains N.
40.25	On rolling bench land. Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked. $\begin{array}{r} \text{S2} \\ \frac{1}{4} \text{---} \\ \text{S11} \end{array}$ 1925
62.00	Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor. Dim road, bears N. 20° W. and S. 20° E.
80.50	The cor. secs. 2, 3, 10 and 11. Land, rolling, with a general northerly exposure and drainage. Soil, deep clay and sand loam; 3rd rate. Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top. No timber. Fair grazing.
.78	N. 0°01' W., on true line bet. secs. 2 and 3. Over rolling bench land through scattered undergrowth. Wagon road, bears N. 70° E. to Clear Lake and S. 70° W. to Ibex.
38.50	Road, bears N. 20° W. to Tule Valley and S. 20° E. to Blackrock, Utah.

56.00 Rolling bench land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.




Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

56.51 Intersect the Fourth Standard Parallel South, East, 7.30 chs. dist. from the standard cor. secs. 34 and 35, heretofore described.

At point of intersection.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for closing cor. secs. 2 and 3, with brass cap marked.



Raise a mound of stone, 3 ft. base, 2 ft. high S. of cor. Land, rolling, with a general northerly exposure and drainage.

Soil, deep clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, mountain rush, yellow top and shadscale.

No timber.

Fair grazing.

From the cor. secs. 3, 4, 33 and 34, on the S. bdy. of the township, which is an iron post, 2 ins. diam., with brass cap, set, marked and witnessed as described in the finished notes of the survey T. 22 S., R. 14 W. N. 0°02' W., bet. secs. 33 and 34.

Ascend gradual S. slope of broken mountainous land through scattered timber and undergrowth.

10.00 Base of abrupt ascent over broken S. slope of spur, bears

## SUBDIVISION, T. 21 S., R. 14 W.

## Chains

Soil, shallow, rocky, clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain  
rush and yellow top.

Timber, scattered scrub juniper.

Fair grazing.

N. 89°56' E., on random line bet. secs. 27 and 34.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

80.36 Intersect the N. and S. line, 37 lks. S. of the cor.  
secs. 26, 27, 34 and 35.

Thence,

S. 89°40' W., on true line bet. secs. 27 and 34.

Descend abrupt NW. slope of broken mountainous land  
through scattered undergrowth and timber.

17.60 Ravine, 240 ft. below cor., drains NE.; ascend abrupt  
SE. slope of spur.

30.00 Spur, 290 ft. above ravine, projects N. 30° E.; descend  
abrupt NW. slope of spur.

38.00 Ravine, 140 ft. below spur, drains N. 30° E.; ascend  
abrupt SE. slope of spur.

40.18 On abrupt SE. slope, 20 ft. above ravine.

Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in  
the ground to bedrock and 10 ins. in a mound of stone,  
for  $\frac{1}{4}$  sec. cor., with brass cap marked.

$$\frac{1}{4} \frac{S27}{S34}$$

1925

From which,

A juniper, 12 ins. diam., bears S. 12° E., 26 lks.  
dist., marked  $\frac{1}{4}$  S34 BT.

A juniper, 10 ins. diam., bears N. 25° W., 175 lks.  
dist., marked  $\frac{1}{4}$  S27 BT.

63.10 Spur, 960 ft. above the  $\frac{1}{4}$  sec. cor., projects N.;  
descend abrupt W. slope of spur.

80.36 The cor. secs. 27, 28, 33 and 34, 570 ft. below spur.

Land, broken and mountainous, with a general northeasterly

SUBDIVISION, T. 21 S., R. 14 W.

Chains

exposure and drainage.

Soil, shallow, rock, clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain  
rush and yellow top.

Timber, scattered scrub juniper.

Fair grazing.


N. 0°02' W., bet. secs. 27 and 28.

Descend abrupt N. slope of broken mountainous land  
through scattered undergrowth and timber.

1.00 Ravine, 30 ft. below cor., heads 5 chains to the E. and  
drains NW; thence descend gradually along broken W.  
slope of high sour.

49.00 On surfacerock, 270 ft. below ravine, mark a cross (X),  
over which:

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in a  
mound of stone, for  $\frac{1}{4}$  sec. cor., with brass cap marked.




1925

No other suitable accessories available.

77.30 Base of descent from W. slope of sour, bears NE. and SW.

80.00 On rolling land, 510 ft. below the  $\frac{1}{4}$  sec. cor.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the  
ground, for cor. secs. 21, 22, 27 and 28, with brass  
cap marked.



1925

Raise a mound of stone, 3 ft. base, 2 ft. high W. of cor.

No suitable bearing trees available.

Land, broken and mountainous with a general westerly  
exposure and drainage.

Soil, shallow, rocky, clay and sand loam; 3rd rate.

SUBDIVISION, T. 21 S., R. 14 W.

Undergrowth, scattered sagebrush, shadscale, mountain  
rush and yellow top.

Timber, scattered scrub juniper.

Fair grazing.

N. 89°40' E., on random line bet. secs. 22 and 27.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

80.42 Intersect the N. and S. line, 23 lks. N. of the cor.  
secs. 22, 23, 26 and 27.

Thence,

S. 89°50' W., on true line bet. secs. 22 and 27.

Descend abrupt NW. slope of broken mountainous land  
through scattered undergrowth.

7.60 Ravine, 190 ft. below cor., heads 10 chains to the S.  
and drains N.; ascend abrupt E. slope of spur.

15.30 Spur, 170 ft. above ravine, projects N.; descend abrupt  
W. slope of spur.

34.90 Ravine, 420 ft. below spur, heads about 20.00 chs. to  
S., and drains N.; ascend gradual E. slope.

40.21 At base of abrupt ascent over E. slope of spur.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in  
the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

$$\begin{array}{r} S22 \\ \frac{1}{4} \\ \hline S27 \\ 1925 \end{array}$$

Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.

55.00 Rocky spur, 260 ft. above ravine, projects N.; descend  
abrupt W. slope of spur.

80.42 The cor. secs. 21, 22, 27 and 28, 400 ft. below spur.

Land, broken and mountainous, with a general easterly  
and westerly exposure and northerly drainage.

Soil, shallow, loose, rocky, clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain  
rush and yellow top.


No timber.

Fair grazing.

SUBDIVISION, T. 21 S., R. 14 W.

Chains


N. 0°02' W., bet. secs. 21 and 22.  
 Over rolling bench land through scattered undergrowth.  
 1.00 Old wagon road, bears NE. and SW.  
 1.40 Wash, 10 lks. wide, 2 ft. deep, drains NE.  
 12.50 Wash, 30 lks. wide, 3 ft. deep, drains NE.  
 13.60 Base of abrupt ascent over SE. slope of spur, bears NE.  
 and S. 70° W.  
 40.00 On broken E. slope of spur.  
 Set an iron post, 3 ft. long, 1 in. diam.; 6 ins. in the  
 ground to bedrock and 24 ins. in a mound of stone,  
 for  $\frac{1}{4}$  sec. cor.; with brass cap marked.



Deposit a sandstone, 4 x 4 x 4 ins., at base of post,  
 marked with a cross (X).

57.70 Top of rocky spur, 530 ft. above sec. cor., projects E.;  
 descend abrupt N. slope of spur.

80.00 On abrupt N. slope of spur, 350 ft. below top.  
 Set an iron post; 3 ft. long, 2 ins. diam., 27 ins. in  
 the ground, for cor. secs. 15, 16, 21 and 22, with  
 brass cap marked.



Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.  
 Land, broken and mountainous with a general northeasterly  
 exposure and drainage.

Soil, shallow, rocky, clay and sand loam; 3rd rate.  
 Undergrowth, scattered sagebrush, shadscale, mountain  
 rush and yellow top.

No timber.

Fair grazing.

SUBDIVISION, T. 21 S., R. 14 W.

(X) 89°50' E., on random line bet. secs. 15 and 22.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

80.38 Intersect the N. and S. line, 7 lks. S. of the cor.

base sec. 14, 15, 22 and 23.

Thence,

S. 89°47' W., on true line bet. secs. 15 and 22.

Over rolling land through scattered undergrowth.

10.00 Base of gradual ascent over broken S. slope of spur,  
bears NE. and SW.

40.19 On broken SE. slope of surfacerock, 300 ft. above sec.  
cor.; mark a cross (X), over which:

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in a  
mound of stone, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

S15  
 $\frac{1}{4}$  —————  
S22

1925

No other suitable accessories available.

76.20 Ravine, 40 ft. deep, drains SE.

80.38 The cor. secs. 15, 16, 21 and 22, 210 ft. above the  $\frac{1}{4}$   
sec. cor.

Land, rolling and broken, with a general southerly  
exposure and drainage.

Soil, shallow, loose, rocky, clay and sand loam; 3rd  
rate.

Undergrowth, scattered sagebrush, shadscale, mountain  
rush and yellow top.

No timber.

Fair grazing.

N. 0°02' W., bet. secs. 15 and 16.

Descend abrupt NE. slope of broken mountainous land  
through scattered undergrowth.


3.80 Ravine, 80 ft. below cor., drains S. 60° E.; ascend  
abrupt SE. slope of spur.

16.30 Rocky spur, 330 ft. above ravine, projects E.; descend  
abruptly over broken W. slope.

SUBDIVISION, T. 21 S., R. 14 W.

Chains

40.00 On surfacerock, 80 ft. below spur, mark a cross (X),  
over which:  
Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in a  
mound of stone, for  $\frac{1}{4}$  sec. cor., with brass cap marked.




No other suitable accessories available.

52.00 Draw, 270 ft. below the  $\frac{1}{4}$  sec. cor., drains NW.; ascend  
abrupt SW. slope of spur.

73.00 Spur, 420 ft. above ravine, projects W.; descend abrupt  
NW. slope.

80.00 On broken W. slope of surfacerock, 200 ft. below spur,  
mark a cross (X), over which:  
Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in a  
mound of stone, for cor. secs. 9, 10, 14 and 15, with  
brass cap marked.



No other suitable accessories available.

Land, broken and mountainous with a general westerly  
exposure and drainage.

Soil, shallow loose sand and rock; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain  
rush and yellow top.

No timber.

Fair grazing.

N. 89°47' E., on random line bet. secs. 10 and 15.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

80.50 Intersect the N. and S. line, 7 lks. N. of the cor. secs.  
10, 11, 14 and 15.

Thence,

S. 89°50' W., on true line bet. secs. 10 and 15.

.7 MI SUBDIVISION, T. 21 S., R. 14 W.

Descend gradually over broken NW. slope of mountainous  
land through scattered undergrowth.

32.70 Ravine, 220 ft. below cor., heads 15 chains to the SW.,  
drains NE.; ascend abrupt SE. slope of spur.

37.60 Spur, 110 ft. above ravine, projects NE.; descend abrupt  
NW. slope of spur.

40.25 On broken NW. slope of spur, 20 ft. below top.  
Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in  
the ground to bedrock and 10 ins. in a mound of stone,  
for  $\frac{1}{4}$  sec. cor., with brass cap marked.

S10  

---

S15  
1925

Deposit a blue limestone, 3 x 6 x 4 ins., at base of  
post, marked with a cross (X).

No other suitable accessories available.

41.00 Base of descent from spur, 50 ft. below the  $\frac{1}{4}$  sec. cor.,  
bears N. 30° E. and S. 30° W.

49.00 Draw, 30 ft. deep, drains N. 30° E.

54.00 Base of abrupt ascent over E. slope of spur, bears  
N. and S.

63.00 Top of spur, 370 ft. above ravine, projects N.; descend  
abrupt W. slope.

67.70 Ravine, 100 ft. below spur, drains N.; ascend abrupt  
E. slope.

75.80 Spur, 220 ft. above ravine, projects N.; descend abrupt  
W. slope.

80.50 The cor. secs. 9, 10, 15 and 16, 70 ft. below spur.  
Land, broken and mountainous with a general northeasterly  
exposure and drainage.

Soil, shallow, rocky, clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain  
rush and yellow top.

No timber.


Fair grazing.

SUBDIVISION, T. 21 S., R. 14 W.


DAIRY

Chains

N. 0°02' W., bet. secs. 9 and 10.  
 Descend gradual W. slope of broken mountainous land  
 through scattered undergrowth.  
 23.00 Base of descent, 400 ft. below cor.; bears NE. and SW.;  
 thence over rolling land.  
 25.00 Wash, 30 lks. wide, 2 ft. deep, drains NE.  
 33.70 Road, bears NE. to Clear Lake and SW. to Ibex.  
 40.00 On rolling land.  
 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the  
 ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.



Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.  
 79.00 Wash, 40 lks. wide, 3 ft. deep, drains N. 80° E.  
 80.00 On rolling land.  
 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the  
 ground, for cor. secs. 3, 4, 9 and 10, with brass cap  
 marked.



Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.  
 Land, rolling and broken, with a general westerly and  
 northeasterly exposure and drainage.  
 Soil, shallow and deep clay and sand-loam; 3rd rate.  
 Undergrowth, scattered sagebrush, shadscale, mountain  
 rush and yellow top.  
 No timber.  
 Fair grazing.

N. 89°50' E., on random line bet. secs. 3 and 10.  
 40.00 Set temp.  $\frac{1}{4}$  sec. cor.,  
 80.48 Intersect the N. and S. line, 3 lks. S. of the cor. secs.  
 2, 3, 10 and 11.  
 Thence,

SUBDIVISION, T. 21 S., R. 14 W.

chains

- 2.50 Over rolling bench land through scattered undergrowth. Road, bears N. 70° E. to Clear Lake and S. 70° W. to Ibex.
- 40.24 On rolling land. Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

$$\frac{93}{\frac{1}{4}} = 310$$

1925

- 42.20 Wash, 40 lks. wide, 4 ft. deep, drains N., 4 chains to junction with wash from S. 30° W.
- 49.50 Wash, 40 lks. wide, 2 ft. deep, drains N. 30° E.
- 80.48 The cor. secs. 3, 4, 9 and 10. Land, rolling, with a general northeasterly exposure and drainage. Soil, deep clay and sand loam; 3rd rate. Undergrowth, scattered sa ebrush, shadscale, mountain rush and yellow top. No timber. Fair grazing.

---

N. 0°02' W., on true line bet. secs. 3 and 4. Ascend gradual S. slope of broken mountainous land through scattered undergrowth.

- 11.00 Base of spur, bears E. and W.
- 17.40 Spur, 290 ft. above cor., projects E., 20 chains dist.; descend abrupt N. slope of spur.
- 35.00 Base of N. side of spur, bears E. and W.
- 40.00 On rolling land, 370 ft. below spur. Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

$$\frac{94}{\frac{1}{4}} = 33$$

1925

.W 41 .SUBDIVISION, TUGUEHEAD, R. 14 W.

Set an iron post, 3 ft. long, 1 in. diam., 15 ins. in the ground, to bedrock and 15 ins. in a mound of stone, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

S32 | S33

1925

From which,

A juniper, 8 ins. diam., bears N. 10° E., 167 lks. dist., marked  $\frac{1}{4}$  S33 BT.

A juniper, 10 ins. diam., bears N. 46°30' W., 101 lks. dist., marked  $\frac{1}{4}$  S32 BT.

54.00 Spur, 450 ft. above ravine, projects S. 20° E.; descend abruptly along broken E. slope of spur.

80.00 On broken E. slope of spur, 540 ft. below top.

Set an iron post, 3 ft. long, 2 ins. diam., 18 ins. in the ground to bedrock and 12 ins. in a mound of stone, for cor. secs. 28, 29, 32 and 33, with brass cap marked.

T21S | R14W

S29 | S28

S32 | S33

1925

From which,

A juniper, 4 ins. diam., bears N. 48° E., 69 lks. dist., marked BT.

A juniper, 8 ins. diam., bears S. 25° E., 100 lks. dist., marked BT.

A juniper, 10 ins. diam., bears S. 85° W., 73 lks. dist., marked BT.

A juniper, 10 ins. diam., bears N. 12°30' W., 32 lks. dist., marked BT.

Trees too scrubby for other marks.

Land, broken and mountainous with a general easterly and westerly exposure and drainage.

Soil, shallow, rocky, clay and sand loam; 3rd rate

Undergrowth, scattered sagebrush, shadeleaf, mountain rush and yellow top.

SUBDIVISION, T. 21 S., R. 14 W.

BRISKO

Chains

Timber, scattered scrub juniper and pinon. Fair grazing.

N. 89°55' E., on random line bet. secs. 28 and 33.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

79.72 Intersect the N. and S. line, 5 lks. S. of the cor. secs. 27, 28, 33 and 34.

Thence,

S. 89°55' W., on true line bet. secs. 28 and 33.

Over broken mountainous land through scattered undergrowth. Descend gradually along broken NE. slope.

83.30 Spur, projects NW.; thence descend abrupt SW. slope.

84.45 On broken W. slope of surface rock, mark a cross (X), over which:

Set an iron post, 7 ft. long, 1 in. diam., 30 ins. in a mound of stone, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

$$\begin{array}{r} S28 \\ \frac{1}{4} \\ \hline S33 \\ 1925 \end{array}$$

No other suitable accessories available.

87.77 Draw, 740 ft. below sec. cor., drains N. 15° W.; ascend abrupt E. slope.

88.07 Wagon road, bears N. and S.

88.72 The cor. secs. 28, 29, 32 and 33, 680 ft. above draw. Land, broken and mountainous with a general easterly and westerly exposure and drainage.

Soil, shallow, rocky, clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

Timber, a few scattered scrub juniper.

Fair grazing.

SUBDIVISION T. 21 S., R. 14 W.


various

N. 0°03' W., bet. secs. 28 and 29.

Over broken E. slope of spur through scattered undergrowth and timber.

39.10 As the true point for the  $\frac{1}{4}$  sec. cor. falls on ledge where it is impracticable to set cor., therefore at this point, on surface rock, mark a cross (X), over which:

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in a mound of stone, for witness cor. to the  $\frac{1}{4}$  sec. cor., with brass cap marked.



From which,


A point on ledge, marked WC X 30 S29, bears E. 30° E., 3 lks. dist.

A juniper, 6 ins. diam., bears N. 59° W., 30 lks. dist., marked WC  $\frac{1}{4}$  S29 BT.

40.00 True point for the  $\frac{1}{4}$  sec. cor. falls on E. face of ledge where it is impracticable to set cor.

76.00 As the true point for the cor. secs. 20, 21, 28 and 29, falls on ledge where it is impracticable to set cor., therefore at this point;

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for witness cor. to the cor. secs. 20, 21, 28 and 29, with brass cap marked.



1925

From which,

A juniper, 6 ins. diam., bears N. 31°30' E., 107 lks. dist., marked ~~BT~~

A juniper, 8 ins. diam., bears S. 54° E., 64 lks. dist., marked BT.

A juniper, 8 ins. diam., bears S. 76°30' W., 79 lks.

dist., marked ST. ...  
2 yds. S. The. ...  
dist., marked ST.

Trace the scrubby for other marks.

50.00 Point for the cor. secs. 20, 21, 23 and 29, falls on  
SE. face of ledge where it is impracticable to set  
land, broken by ledges with a general easterly exposure  
and drainage.  
Soil, shallow, loose, rocky, clay and sand loam; 3rd rate  
Undergrowth, scattered sagebrush, shrubs, mountain  
ash and yellow top.  
Flora, scattered scrub juniper.  
Fair grazing.

N. 89°45' E., on random line bet. secs. 21 and 28.

The broken SE. face of ledge makes it impracticable to  
chain E. from the true point for the cor. secs. 20, 21,  
23 and 29, I therefore commence at the witness cor. to  
said secs., which is S. 0°03' E., 4.00 chs. dist. from  
the true cor. point.

Thence,

N. 89°54' E., on offset line.

6.75 Offset W. 0°03' W., 4.00 chs. dist. to true random line,  
thence on true random line.

40.00 Set temp. 1/2 sec. cor.

13.75 Intersect the N. and S. line, 21 lks. S. of the cor.  
secs. 21, 23, 27 and 28.

Thence,

S. 89°45' W., on true line bet. secs. 21 and 28.

Over rolling land through scattered undergrowth.

1.50 Wash, 40 lks. wide, 3 ft. deep, drains W. ...

3.00 Large road, bears NE. and SW. ...

25.00 Wash, 45 lks. wide, 2 ft. deep, ...

75.00 Base of abrupt ...  
N. 80° E. and S. 80° W. ...

W. H. S. ...  
SUBDIVISION, T. 21 S., R. 14 W.

39.86 At base of abrupt ascent over ledges, bears NE. and SW.  
Set an iron post, 3 ft. long, 1 in. diam., 14 ins. in the  
ground to bedrock and 16 ins. in a mound of stone, for  
sec. cor., with brass cap marked.

821  
828  
1925

Deposit a limestone, 7 x 5 x 4 ins., at base of post,  
marked with a cross (X).

No other suitable accessories available.

73.72 To point of offset at base of impassable ledges, bears NE  
and SW.; thence by offset as follows:  
S. 0°03' E., 4.00 chs. dist.  
S. 89°45' W., 6.00 chs. dist.  
N. 0°03' W., 4.00 chs. dist. to:

79.72 The true point for the cor. secs. 20, 21, 28 and 29,  
660 ft. above base of abrupt ascent.  
Land, rolling and broken, with a general southeasterly  
and northeasterly exposure and drainage.  
Soil, shallow and deep, rocky, clay and sand loam; 3rd  
rate,  
Undergrowth, scattered sawbrush, shadscale, mountain  
rush and yellow top.  
No timber.  
Fair grazing.

---

N. 0°03' W., bet. secs. 20 and 21.  
As the true point for the cor. secs. 20, 21, 28 and 29,  
is on SE. face of ledge where it is impracticable to  
reach cor., point, I commence at the witness cor. to  
said secs., which is S. 0°03' E., 4.00 chs. dist. from  
the true cor. point and run on offset over broken  
mountainous land through scattered timber and under-  
growth as follows:  
East, 6.00 chs. dist.,  
N. 0°03' W., 44.00 chs. dist.

Subdivision, T. 21 S., R. 14 W.


Chains

West, 6.00 chs. dist to true line.

6.50 Approximate distance counted from true point for cor. secs. 20, 21, 23 and 29; spur, 200 ft. above cor., point, projects NE.; descend abruptly over broken E. slope of spur to the W.

40.00 To point of offset on true line, on broken E. slope, 320 ft. below spur.

Set an iron post, 3 ft. long, 1 in. diam., 4 ins. in the ground to bedrock and 25 ins. in a mound of stone, for 1/4 sec. cor., with brass cap marked.



From which,

A juniper, 10 ins. diam., bears N. 32°45' E., 302 lks. dist., marked 1/4 S21 BT.


A juniper, 8 ins. diam., bears N. 30°30' W., 43 lks. dist., marked 1/4 S20 BT.

Hence on true line over broken E. slope of spur.

54.00 Leave timber, bears NE. and SW.

80.00 On broken E. slope of surfacerock, 200 ft. below the 1/4 sec. cor.; mark a cross (X), over which.

Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in a mound of stone, for cor. secs. 16, 17, 20 and 21, with brass cap marked.



No other suitable accessories available.

Land, broken and mountainous with a general easterly exposure and drainage.

Soil, shallow rocky, clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

Timber, scattered scrub juniper on S. portion of mile.

Subdivision, T. 21 S., R. 14 W.

MARKS

N. 89°45' E., on random line bet. secs. 16 and 21.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

79.70 Intersect the N. and S. line, 23 lks. N. of the cor.  
secs. 15, 16, 21 and 22.

Thence,

S. 89°55' W., on true line bet. secs. 16 and 21.

Ascend abruptly over broken SE. slope of spur through  
scattered undergrowth.

11.50 Spur, 290 ft. above cor., projects NE.; descend abrupt  
NW. slope of spur.

31.00 Base of abrupt descent, bears N. and SW.; thence over rolling  
land.

39.85 On rolling land, 430 ft. below spur.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in  
the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

$\frac{310}{\frac{1}{4}}$   
321

1925

Raise a mound of stone, 3 ft. base, 2 ft. high N. of cor.

72.00 Base of abrupt ascent over E. slope of spur, bears N.  
and S.

79.70 The cor. secs. 15, 17, 20 and 21, 210 ft. above the  $\frac{1}{4}$   
sec. cor.

Land, rolling and broken, with a general northeasterly  
exposure and drainage.

Soil, shallow loose, rocky, clay and sand loam; 3rd rate.

Undergrowth, scattered sarsbrush, shadscale, mountain  
rush and yellow top.

No timber.

Fair grazing.

Chains

N. 9°03' W., bet. secs. 16 and 17.

Descend abrupt SE. slope of spur, through scattered undergrowth.

15.00 Base of descent from spur, 150 ft. below sec. cor., bears W. and SE.; thence over rolling land.

40.00 On rolling land.  
Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.



Raise a mound of stone, 3 ft. base, 2 ft. high W. of cor.


53.70 Wash, 20 lks. wide, 2 ft. deep, drains NE.

59.30 Road, bears NE. to Clear Lake and SW. to Ibex.

70.00 Road, bears E. and W. 70° W.

80.00 On rolling land.

Set an iron post, 3 ft. long, 2 ins. diam., 20 ins. in the ground to bedrock and 10 ins. in a mound of stone, for cor. secs. 8, 9, 16 and 17, with brass cap marked.



Deposit a limestone, 7 x 6 x 4 ins., at base of post, marked with a cross (X).

No other suitable accessories available.

Land, rolling and broken with a general northeasterly exposure and drainage.

Soil, deep clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

Subdivision of T. 21 S., R. 14 W.

N. 89°55' E., on random line bet. secs. 9 and 16.

40.00 Set temp. 1/4 sec. cor.

79.80 Intersect the N. and S. line, 12 lks. S. of the cor. secs. 9, 10, 15 and 16.

Thence,

N. 89°50' W., on true line bet. secs. 9 and 16.

Descend abruptly over broken NW. slope of spur through scattered undergrowth.

18.90 Base of descent from spur, 320 ft. below top, bears NE. and SW.; thence over rolling land.

19.10 Wash, 40 lks. wide, 3 ft. deep, drains NE.

37.60 Road, bears NE. to Clear Lake and SW. to Ibex.

39.90 On rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/4 sec. cor., with brass cap marked.

S9  
-----  
S16  
1925

79.80 Raise a mound of stone, 3 ft. base, 2 ft. high N. of cor. The cor. secs. 3, 9, 16 and 17.

Land, rolling with a general northeasterly exposure and drainage.

Soil, deep clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

N. 0°03' W., bet. secs. 8 and 9.


Over rolling land through scattered undergrowth.

22.30 Wash, 40 lks. wide, 4 ft. deep, drains NE.

40.00 On rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/4 sec. cor., with brass cap marked.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.



1925

79.82 Raise a mound of stone, 3 ft. base, 2 ft. high N. of cor. The cor. secs. 4, 5, 8 and 9.

Land, rolling, with a general southerly exposure and drainage.

Soil, deep clay and sand; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

N. 0°03' W., on true line bet. secs. 4 and 5.


Over rolling land through scattered undergrowth.

12.00 Base of abrupt ascent over S. slope of ridge, bears E. and W.

29.20 Top of ridge, 300 ft. above cor., bears E. and NW.; descend abrupt NE. slope.

40.00 On broken NE. slope, 90 ft. below ridge.

Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground, to bedrock, and 20 ins. in a mound of stone, for  $\frac{1}{4}$  sec. cor., with brass cap marked.



Deposit a limestone, 8 x 6 x 3 ins., at base of post, marked with a cross (X).

No other suitable accessories available.

42.00 Ravine, 60 ft. below the  $\frac{1}{4}$  sec. cor., drains N. 60° E.; heads about 10 chains to the W.

50.00 Spur, 60 ft. above ravine, projects N. 80° E.; descend abrupt N. slope of spur.

56.80 On broken N. slope of spur, 130 ft. below top; intersect

## Subdivision, T. 21 S., R. 14 W.

Chains

the Fourth Standard Parallel South, East, 7.15 chs.  
dist. from the standard cor. secs. 32 and 33, heretofore described.

At point of intersection:

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for closing cor. secs. 4 and 5, with brass cap marked.

T20S R14W

S33

S5

S4

T21S

R14W

C

C

1925

Raise a mound of stone, 3 ft. base, 2 ft. high, S. of cor. Land, broken and rolling, with a general southeasterly and northeasterly exposure and drainage.

Soil, shallow loose sand, clay and rock; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

From the cor. secs. 5, 6, 31 and 32, on the S. bdy. of the township, which is an iron post, 2 ins. diam., with brass cap, set, marked and witnessed as described in the finished notes of the survey T. 22 S., R. 14 W. N. 0°03' W., bet. secs. 31 and 32.

Ascend gradually over rolling mountainous land through scattered undergrowth and timber.

7.00 Leave timber, bears NW. and E.

8.00 On broken W. slope, 130 ft. above sec. cor.

Set an iron post, 3 ft. long, 1 in. diam., 9 ins. in the ground to bedrock and 21 ins. in a mound of stone, for  $\frac{1}{2}$  sec. cor., with brass cap marked.

S31

S32

1925

## Subdivision, T. 21 S., R. 14 W.

## Chains

Deposit a limestone, 9x 5 x 4 ins., at base of post, marked with a cross (X).

No other suitable accessories available.

46.80 Top of gradual descent over rolling W. slope, bears E. and W.

80.00 On broken W. slope, 110 ft. below the  $\frac{1}{4}$  sec. cor.  
Set an iron post, 3 ft. long, 2 ins. diam., 15 ins. in the ground to bedrock and 15 ins. in a mound of stone, for cor. secs. 29, 30, 31 and 32, with brass cap marked.

T21S	R14W
S30	S29
S31	S32

1925

Deposit a limestone, 3 x 5 x 4 ins., at base of post, marked with a cross (X).

Land, rolling and broken, with a general westerly exposure and drainage.

Soil, shallow, loose, rocky, clay and sand; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

Timber, scattered scrub juniper on S. portion of mile.

Fair grazing.

N.  $89^{\circ}56'$  E., on random line bet. secs. 29 and 32.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

79.82 Intersect the N. and S. line, 19 lks. W. of the cor.  
secs. 28, 29, 32 and 33.

N.  $89^{\circ}56'$  W., on true line bet. secs. 29 and 32.

Ascend abruptly over broken E. slope of ridge through scattered undergrowth and timber.

10.00 Top of rocky ridge, 390 ft. above cor., bears N.  $12^{\circ}$  W. and S.  $12^{\circ}$  E.; descend abrupt W. slope of ridge.

39.91 On broken W. slope, 370 ft. below ridge.

Set an iron post, 3 ft. long, 1 in. diam., 6 ins. in the ground to bedrock and 24 ins. in a mound of stone, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

Subdivision, T. 21 S., R. 14 W.

anladd

Chains

S29

$\frac{1}{4}$

S32

1925

From which,

A juniper, 6 ins. diam., bears S. 22° W., 104 lks. dist., marked BT. Tree too scrubby for other marks.

A juniper, 10 ins. diam., bears N. 56°45' W., 54 lks. dist., marked  $\frac{1}{4}$  S29 BT.

79.82 The cor. secs. 29, 30, 31 and 32, 640 ft. below the  $\frac{1}{4}$  sec. cor.

Land, broken and mountainous with a general easterly and westerly exposure and drainage.

Soil, shallow, rocky, clay and sand; 3rd rate.

Undergrowth, scattered sagebrush, shadescale, mountain rush and yellow top.

Timber, scattered scrub juniper.

Fair grazing.

S. 89°56' W., on random line bet. secs. 30 and 31.

40.00 Set temo.  $\frac{1}{4}$  sec. cor.

77.61 Intersect the W. bdy. of the township, 3 lks. N. of the cor. secs. 29, 30, 31 and 32, heretofore described.

Thence,

N. 89°55' E., on true line bet. secs. 30 and 31.

Over rolling land through scattered undergrowth.

37.61 On rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

S30

$\frac{1}{4}$

S31

1925

Raise a mound of stone, 3 ft. base, 2 ft. high N. of cor.

41.60 Road, bears N. 10° E. to Clear Lake and S. 10° W. to IbeX.

52.00 Enter dense grove of juniper, bears N. and S.

67.00 Leave grove of juniper, bears N. and S. 30° E.

- Chains
- 65.00 Base of gradual ascent over rolling W. slope, bears N. and S.
- 77.61 The cor. secs. 29, 30, 31 and 32, 40 ft. above cor. on on the W. bdy. of the township.  
 Land, rolling and broken, with a general westerly exposure and drainage.  
 Soil, deep, clay and sand loam; 3rd rate.  
 Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.  
 Timber, dense grove of juniper on E. portion of mile.  
 Fair grazing.
- 
- N. 0°03' W., bet. secs. 29 and 30.  
 Ascend abruptly over broken S. slope of spur, through scattered undergrowth and timber.
- 26.10 Spur, 200 ft. above cor., projects N. 80° W.; descend gradual N. slope of spur.
- 40.00 In bottom of draw which has no water channel, 120 ft. below spur, drains N. 70° W.  
 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.
- $\frac{1}{4}$   
 S30 | S29  
 1925
- From which,  
 A juniper, 8 ins. diam., bears N. 85° W., 100 lks. dist., marked  $\frac{1}{4}$  S30 BT.  
 No other suitable bearing trees available.  
 Deposit a limestone, 6 x 4 x 2 ins., at base of post, marked with a cross (X).  
 Thence ascend gradual S. slope of spur.
- 49.60 Top of spur, 130 ft. above the  $\frac{1}{4}$  sec. cor., projects W.; descend gradual N. slope of spur.
- 80.00 On broken W. slope, 280 ft. below spur.  
 Set an iron post, 3 ft. long, 2 ins. diam., 15 ins. in the

Subdivision, T. 21 S., R. 14 W.

Chains

ground to bedrock and 15 ins. in a mound of stone for cor. secs. 19, 20, 29 and 30, with brass cap marked

T21S	R14W
S19	S20
S30	S29

1925

Deposit a limestone, 3 x 4 x 4 ins., at base of post, marked with a cross (X).

No other suitable accessories available.

Land, broken and rolling, with a general northerly and southerly exposure and drainage.

Soil, shallow, rocky, clay and sand; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

Timber, a few scattered scrub juniper.


Fair grazing.

S. 89°56' E., on random line bet. secs. 20 and 29.

40.00 Set temp. 1/4 sec. cor.

67.20 Ledges make chaining to the E. of this point impracticable I therefore offset S. 0°03' E., 4.00 chs. dist., thence S. 89° 56' E. on offset line.


70.78 From this point on offset line, I triangulate over inaccessible ledge to the witness cor. to the cor. secs. 20, 21, 28 and 29, as follows. Erect flag "A" at this point and flag "B" at the witness cor. to the cor. secs. 20, 21, 28 and 29. From "B", measure base line "BC", S. 0°04' W., 9.04 chs. dist., from which point flags "AB" subtend an angle of 45°03'. From flag "A" "B", bears S. 89°56' E.

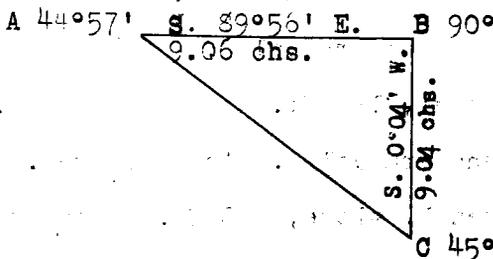

Distance on line 70.78 chs.  
Distance by triangulation 9.06 chs.

Subdivision of T. 21 S. R. 14 W.

- 79.84 To point "B" of triangulation at the witness cor. to the cor. secs. 20, 21, 28 and 29, which is S. 0°03' E., 4.00 chs. dist. from the true point for cor. The course of the line bet. the true point for cor. secs. 20, 21, 28 and 29, to the cor. secs. 19, 20, 29 and 30, therefore is N. 89°56' W., and the distance is 79.84 chs.
- As a high limestone ledge makes it impracticable to project a line W. from the true point for the cor. secs. 20, 21, 28 and 29, I commence at the witness cor. to the cor. said secs. and run N. 89°56' W., on offset line, by triangulation over broken E. slope of ridge through scattered undergrowth and timber.
- 9.06 To point "A" of triangulation; thence by chaining.
- 12.64 To point of offset, at top of ridge, 630 ft. above true point for the cor. secs. 20, 21, 28 and 29; bears N. 20° E. and S. 20° W.; thence offset N. 0°03' W., 4.00 chs. dist. to true line; thence N. 89°56' W. on true line; descend abrupt W. slope of ridge.
- 39.92 On surface rock, mark a cross (X), over which:  
Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in a mound of stone, for  $\frac{1}{4}$  sec. cor., with brass cap marked.



1925

From which,

- A juniper, 8 ins. diam.; bears N. 50° E., 124 lks. dist., marked  $\frac{1}{4}$  S20 BT.
- A juniper, 10 ins. diam., bears S. 67°45' W., 215 lks. dist., marked  $\frac{1}{4}$  S29 BT.

79.84 The cor. secs. 19, 20, 29 and 30, 900 ft. below ridge. Land, broken and mountainous with a general easterly and westerly exposure and drainage.

Soil, shallow, rocky, clay and sand; 3rd rate.

Undergrowth, scattered sagebrush, shade scale, mountain rush and yellow top.

Timber, scattered scrub juniper.

Subdivision, T. 21 S., R. 14 W.

ENR180

Chains

S. 89°55' W., on random line bet. secs. 19 and 30. 45.97

40.00 Set temp. 1/4 sec. cor.

77.53 Intersect the W. bdy. of the township, at the cor. secs. 19, 24, 25 and 30, heretofore described.


Thence,

N. 89°55' E., on true line bet. secs. 19 and 30.

Over rolling land through scattered undergrowth and timber.

37.53 On rolling land, 130 ft. below the sec. cor.

Set an iron post, 3 ft. long, 1 in. diam., 14 ins. in the ground to bedrock and 16 ins. in a mound of stone, for 1/4 sec. cor., with brass cap marked.



From which,

A juniper, 3 ins. diam., bears N. 24° E., 291 lks. dist., marked 1/4 S19 BT.

A juniper, 4 ins. diam., bears S. 88°44' E., 316 lks. dist., marked 1/4 S30 BT.

46.60 Road, bears NE. to Clear Lake and S. to Ibex.

63.00 Wash, 30 lks. wide, 3 ft. deep, at base of spur, bears NE. and SW., wash drains NE.; ascend gradual NW. slope of spur.

77.53 The cor. secs. 19, 20, 29 and 30, 130 ft. above the 1/4 sec. cor.

Land, rolling and broken, with a general northeasterly exposure and drainage.

Soil, shallow and deep clay and sand; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

Timber, scattered scrub juniper.

Fair grazing.

Subdivision, T. 21 S., R. 14 W.

Chains

N. 0°03' W., bet. secs. 19 and 20.


Descend gradual NW. slope of rolling land through scattered undergrowth.

15.00 Base of descent from spur, bears N. 30° E. and S. 30° W.; thence over rolling bench land.

37.50 Wash, 30 lks. wide, 2 ft. deep, drains NE.

40.00 On rolling land, 170 ft. below the sec. cor.

Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground to bedrock and 20 ins. in a mound of stone, for  $\frac{1}{4}$  sec. cor., with brass cap marked.



Deposit a limestone, 5 x 4 x 2 ins., at base of post, marked with a cross (X).


No other suitable accessories available.

40.50 Road, bears NE. to Clear Lake and SW. to Ibex.

55.50 Wash, 30 lks. wide, 2 ft. deep, drains N. 70° E.

80.00 On rolling land, 50 ft. below the  $\frac{1}{4}$  sec. cor.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. secs. 17, 18, 19 and 20, with brass cap marked,



Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor. Land, rolling, with a general northeasterly exposure and drainage.

Soil, deep clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

SUBDIVISION, T. 21 S., R. 14 W.

BR1180

Chains	<p>S. 89°56' E., on random line bet. secs. 17 and 20.</p>
40.00	<p>Set temp. <math>\frac{1}{4}</math> sec. cor.</p>
79.62	<p>Intersect the N. and S. line, 12 lks. S. of the cor. secs. 16, 17, 20 and 21.</p> <p>Thence,</p> <p>S. 89°59' W., on true line bet. secs. 17 and 20.</p> <p>Ascend abrupt SE. slope of spur through scattered undergrowth.</p>
24.00	<p>Spur, 330 ft. above cor., projects N.; enter scattered timber, bears N. and S.; descend abrupt NW. slope of spur.</p>
39.81	<p>On surfacerock, mark a cross (X), over which:</p> <p>Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in a mound of stone, for <math>\frac{1}{4}</math> sec. cor., with brass cap marked.</p> <div style="text-align: center;"> <math display="block">\begin{array}{r} S17 \\ \frac{1}{4} \\ \hline S20 \end{array}</math> <p>1925</p> </div> <p>From which,</p> <p>A juniper, 8 ins. diam.; bears S. 23° E., 20 lks. dist., marked <math>\frac{1}{4}</math> S20 BT.</p> <p>A juniper, 10 ins. diam., bears N. 87° W., 120 lks. dist., marked <math>\frac{1}{4}</math> S17 BT.</p>
49.00	<p>Base of spur, 530 ft. below top, bears NE. and SW.; thence over rolling land.</p>
53.00	<p>Wash, 40 lks. wide, 2 ft. deep, drains NE.</p>
56.20	<p>Road, bears NE. to Clear Lake and SW. to Ibex; leave timber bears N. and S.</p>
79.62	<p>The cor. secs. 17, 18, 19 and 20.</p> <p>Land, rolling, with a general northeasterly exposure and drainage.</p> <p>Soil, deep, clay and sand; 3rd rate.</p> <p>Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.</p> <p>Timber, scattered scrub juniper on center portion of mile.</p> <p>Fair grazing.</p>

Chains

S. 89°55' W., on random line bet. secs. 18 and 19.

40.00 Set temporary 1/4 sec. cor.

77.49 Intersect the W. bdy. of the township, 3 lks. S. of the  
cor. secs. 13, 18, 19 and 24, heretofore described.

Thence,

N. 89°56' E., on true line bet. secs. 18 and 19.

Over rolling land through scattered undergrowth.

37.49 On rolling land, 130 ft. below cor.

Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in  
the ground to bedrock and 14 ins. in a mound of stone,  
for 1/4 sec. cor., with brass cap marked.
$$\frac{1}{4} \begin{array}{l} S18 \\ \hline S19 \end{array}$$

1925

Deposit a limestone, 4 x 4 x 4 ins., at base of post,  
marked with a cross (X).

No other suitable accessories available.

77.49 The cor. secs. 17, 18, 19 and 20, 240 ft. below the 1/4  
sec. cor.Land, rolling, with a general northeasterly exposure  
and drainage.

Soil, deep clay and sand; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain  
rush and yellow top.

No timber.

Fair grazing.

N. 0°03' W., bet. secs. 17 and 18.

Over rolling land through scattered undergrowth.

40.00 On rolling land, 80 ft. above sec. cor.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in  
the ground, for 1/4 sec. cor., with brass cap marked.
$$\frac{1}{4} \begin{array}{l} S18 \\ | \\ S17 \end{array}$$

1925

Raise a mound of stone, 3 ft. base, 2 ft. high W. of cor.

## Subdivision, T. 21 S., R. 24 W.

## Chains

anisho

30.00 On rolling land, 40 ft. below the  $\frac{1}{4}$  sec. cor. .  
Set an iron post, 3 ft. long, 2 ins. diam., 15 ins. in the  
ground to solid rock and 12 ins. in a mound of stone, for  
cor. secs. 7, 8, 17 and 18, with brass cap marked.

T21S	R14W
S7	S8
S18	S17

1925

Deposit a limestone, 7 x 5 x 3 ins., at base of post,  
marked with a cross (X).

No other suitable accessories available.

Land, rolling, with a general northeasterly exposure and  
drainage.

Soil, deep, rocky, clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain  
rush and yellow top.

No timber.

Fair grazing.

N.  $39^{\circ}59'$  E., on random line bet. secs. 8 and 17.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

79.70 Intersect the N. and S. line, 16 lks. S. of the cor. secs.  
8, 9, 16 and 17.

Thence,

S.  $39^{\circ}52'$  W., on true line bet. secs. 8 and 17.

Over rolling land through scattered undergrowth.

12.10 Wash, 40 lks. wide, 4 ft. deep, drains NE. at base of  
sour, bears NE. and SW.

30.00 The SE. point of rocky sour, 50 ft. high.

37.90 Recross same wash as last at base of sour, drains SE.,  
base of sour, bears NW. and SE.

39.85 On rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in  
the ground to bedrock and 20 ins. in a mound of stone,  
for  $\frac{1}{4}$  sec. cor., with brass cap marked:

Subdivisión, T. 21 S., R. 14 W.

Chains

Deposit a sandstone, 10 x 5 x 3 ins., at base of post, marked with a cross (X).

No other suitable accessories available.

41.00 Road, bears NW. and S. 80° E.

79.70 The cor. secs. 7, 8, 17 and 18.

Land, rolling, with a general southerly exposure and drainage.

Soil, deep, rocky, clay and sand; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

S. 89°56' W., on random line bet. secs. 7 and 18.

40.00 Set temp. 1/4 sec. cor.

77.47 Intersect the W. bdy. of the township, at the cor. secs. 7, 12, 13 and 18, heretofore described.

Thence,

N. 39°50' E., on true line bet. secs. 7 and 18.

Over rolling land through scattered undergrowth.

21.50 Wash, 40 lks. wide, 2 ft. deep, drains S. 60° E.

37.47 On rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground to bedrock and 10 ins. in a mound of stone, for 1/4 sec. cor., with brass cap marked.

$$\frac{1}{4} \frac{87}{813}$$

1925

Deposit a limestone, 6 x 5 x 4 ins., at base of post, marked with a cross (X).

No other suitable accessories available.

77.47 The cor. sec. 7, 8, 17 and 18, 240 ft. below cor. on the W. bdy. of the township.

Land, rolling, with a general northeasterly exposure and drainage.

0.00

Soil, deep, rocky; clay soil; scattered  
Undergrowth, scattered sagebrush,   
rush and yellow top.  
No timber.  
Fair grazing.

E. 0°31' W., bet. secs. 7 and 8.

Over rolling bench land through scattered undergrowth.

20.50 Wash, 40 lks. wide, 3 ft. deep, drains E., 15.00 chs. then

S. 40° E.

26.30 Road, bears SE. and N. 20° W.

32.50 Wash, 50 lks. wide, 2 ft. deep, at base of spur; wash  
drains SE., base of spur, bears SE. and N. 20° W.

40.00 On gradual SW. slope of spur, 30 ft. above base.

Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the  
ground to solid rock and 20 ins. in a mound of stone,  
for  $\frac{1}{2}$  sec. cor., with brass cap marked.

87 | 98

1925

Deposit a limestone, 10 x 4 x 4 ins., at base of post,  
marked with a cross (E).

No other suitable accessories available.

47.00 Top of spur, 130 ft. above the  $\frac{1}{2}$  sec. cor., projects  
W., 10 chains dist.

51.30 Ravine, 100 ft. below spur, drains W.; heads E. 15 chains  
dist.; ascend abrupt SW. slope of spur.

50.00 On SW. slope of surface rock, 250 ft. above ravine; mark  
a cross (X), over which:

Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in a  
mound of stone, for cor. secs. 5, 6, 7 and 8, with brass  
cap marked.

7216 1117

87 | 100

1925

Subdivision, T. 21 S., R. 14 W.

chains

From which,  
 A juniper, 10 ins. diam., bears N. 13° E., 274 lks.  
 dist., marked BT.  
 Tree too scrubby for other marks and no other suitable  
 bearing trees available.  
 Land, rolling and broken, with a general westerly exposure  
 and drainage.  
 Soil, shallow and deep, rocky, clay and sand; 3rd rate.  
 Undergrowth, scattered sagebrush, shadscale, mountain  
 rush and yellow top.  
 Timber, a few scattered scrub juniper.  
 Fair grazing.

N. 89°52' E., on random line bet. secs. 5 and 3.  
 40.00 Set temp.  $\frac{1}{4}$  sec. cor.  
 79.60 Intersect the N. and S. line, 3 lks. S. of the cor. secs.  
 4, 5, 8 and 9.  
 Thence,  
 S. 89°51' W., on true line bet. secs. 5 and 8.  
 Over rolling land through scattered undergrowth and timber.  
 35.00 Base of gradual ascent over broken NE. slope of sour,  
 bears S. 10° E. and N. 10° W.  
 39.80 On broken NE. slope, 60 ft. above base of sour.  
 Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the  
 ground to bedrock and 18 ins. in a mound of stone, for  
 $\frac{1}{4}$  sec. cor., with brass cap marked.  
 $\frac{1}{4}$   $\frac{S5}{S8}$   
 1925

From which,  
 A juniper, 6 ins. diam., bears S. 50° W., 131 lks.  
 dist., marked  $\frac{1}{4}$  S8 BT.  
 A juniper, 6 ins. diam., bears N. 86°30' W., 187 lks.  
 dist., marked BT. Tree too scrubby for other marks.  
 58.30 Top of spur, 320 ft. above the  $\frac{1}{4}$  sec. cor., projects  
 SE.; descend broken SW. slope of spur.

## Subdivision, T. 21 S., R. 14 W.

## Chains

79.60 The cor. secs. 5, 6, 7 and 8, 180 ft. below sour.  
 Land, broken and rolling with a general northeasterly and  
 southwesterly exposure and drainage.  
 Soil, shallow, rocky, clay and sand; 3rd rate.  
 Undergrowth, scattered sagebrush, shadscale, mountain  
 rush and yellow top.  
 Timber, scattered scrub juniper.  
 Fair grazing.

S.  $89^{\circ} 56'$  W., on random line bet. secs. 6 and 7.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

77.47 Intersect the W. bdy. of the township, 9 lks. S. of the  
 cor. secs. 1, 6, 7 and 12, heretofore described.

Thence,

East, on true line bet. secs. 6 and 7.

Over rolling land through scattered undergrowth and  
 timber.

33.30 Road, bears N. and S.  $30^{\circ}$  E.

37.47 On rolling land, 200 ft. below sec. cor.

Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in  
 the ground to bedrock and 18 ins. in a mound of stone,  
 for  $\frac{1}{4}$  sec. cor., with brass cap marked.

$$\frac{1}{4} \begin{array}{l} S6 \\ \hline S7 \end{array}$$

1925

From which,

A juniper, 12 ins. diam., bears N.  $14^{\circ}$  W., 250 lks.  
 dist., marked  $\frac{1}{4}$  S6 BT.

No other suitable bearing trees available.

56.30 Wash, 40 lks. wide, 3 ft. deep, 40 ft. below  $\frac{1}{4}$  sec. cor.,  
 drains S.  $20^{\circ}$  E.; also base of gradual ascent over  
 rolling SW. slope of spur, bears S.  $20^{\circ}$  E. and N.  $20^{\circ}$  W.

77.47 The cor. secs. 5, 6, 7 and 8, 250 ft. above wash.

Land, rolling, with a general southeasterly exposure and  
 drainage.

Subdivision, T. 21 S., R. 14 W.

Chains

Soil, shallow, rocky, clay and sand; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain  
rush and yellow top.

Timber, scattered scrub juniper.

Fair grazing.

N. 0°03' W., on true line bet. secs. 5 and 6.

Ascend broken SW. slope of spur, through scattered  
undergrowth and timber.

38.80 Top of spur, 400 ft. above cor., projects S. 20° E.;  
descend gradually along broken NE. slope of spur.

40.00 On NE. slope of surfacerock, 20 ft. below top of spur;  
mark a cross (X), over which:

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in a  
mound of stone, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

$\frac{1}{4}$   
 S6 | S5  
 1925

No other suitable accessories available.

57.03 On broken NE. slope, 270 ft. below the  $\frac{1}{4}$  sec. cor.

Intersect the Fourth Standard Parallel South, East, 7.52  
chs. dist. from the standard cor. secs. 31 and 32,  
heretofore described.

At point of intersection.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in  
the ground, for closing cor. secs. 5 and 6, with brass  
cap marked.

T20S R14W  
S32

S6 | S5  
 T21S | R14W  
 C C

1925

Raise a mound of stone, 3 ft. base, 2 ft. high, S. of cor.

No other suitable accessories available.

Subdivision, T. 21 S., R. 14 W.

Chains

enclav

Land, broken, with a general southwesterly and northeasterly exposure and drainage.  
 Soil, shallow, rocky, clay and sand; 3rd rate.  
 Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.  
 Timber, scattered scrub juniper.  
 Fair grazing.

LATITUDES, DEPARTURES  
 AND CLOSING ERRORS, T. 21 S., R. 14 W.

Lines designated	True bearings.	Dist-ances: Chs.	N. Latitudes. Chs.	S. Chs.	E. Departures. Chs.	W. Chs.
4th St. P. S. R13W	West	8.25	.....	.....	.....	8.25
4th St. P. S. R14W	West	469.98	.....	.....	.....	469.98
W. Bdy. T21S R14W	South	457.00	.....	457.00	.....	.....
S. Bdy. T21S R14W	N. 89° 56' E.	477.84	.....	.....	477.84	.....
E. Bdy. T21S R14W	North	455.67	455.67	.....	.....	.....
Convergency		.59	.....	.....	.....	.59
			<u>456.22</u>	<u>457.00</u>	<u>477.84</u>	<u>478.82</u>
				<u>456.22</u>		<u>477.84</u>
Errors in latitudes and departures				0.78		0.98

GENERAL DESCRIPTION, T. 21 S., R. 14 W.

The land within the boundaries of this township, in general, consists of a rolling desert, broken in places by rugged limestone spurs and ridges and has a general northeasterly exposure and drainage.  
 The soil in the flats, consists of a deep white clay, while that on the slopes of the benches, spurs, and ridges, consists of a shallow, gravelly, clay and sand loam, and is classified as third rate.  
 The only timber found in the township was a scattered growth of scrub juniper on the sheltered slopes of the benches, spurs, and ridges, and has no commercial value except for fire wood.  
 The entire township is covered with a scattered undergrowth of sagebrush, shadscale, mountain rush, yellow top, and bunch grass, which affords fair grazing for sheep during the winter months, it being impossible to

## General Description, T. 21 S., R. 14 W.

graze the township during the summer months as no water was found.

No portion of the township is suitable for farming and no settlers, improvements, indications of mineral, coal, oil, or oil shale were found on the township.

The township can be reached by auto over an unimproved road from Blackrock, Utah, which is a small town on Los Angeles and Salt Lake Railroad, which is located approximately 40 miles to the east of the township.

Most of the water supply for camp use for the stockmen used while grazing the township, is obtained from Ibex which is located in the SW. portion of the adjoining township to the south. This water is collected in large tanks made in the surfacerock.

Most portions of the township can be reached by wagon and auto over unimproved roads which pass over the flats and benches between the high ridges and spurs.

The township is suitable for a winter grazing range only, and at the time of the survey, was being used for this purpose.

The magnetic declination was not taken on account of a defective needle.

**Blank**

**Page**



CERTIFICATE OF UNITED STATES SURVEYOR.

I, Willis W. Bandy, U. S. Surveyor, hereby certify upon honor that, in pursuance of special instructions received from the District Cadastral Engineer for Utah bearing date of the 18th day of March, 1921, I have well, faithfully, and in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, surveyed all those parts or portions of the independent resurvey of the fourth standard parallel south through range 14 west and the survey of the west boundary and subdivision of T. 21 S., R. 14 W.

of the Salt Lake Base and Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by me, and under my direction; and that all the corners of said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the District Cadastral Engineer for Utah and in the specific manner described in the field notes, and that the foregoing are the original field notes of such survey.

Certified to at: Umatilla, Fla. Feb. 29, 1928. Willis W. Bandy U. S. Surveyor

APPROVAL.

OFFICE OF U. S. SUPERVISOR OF SURVEYS, Denver, Colorado, MAR 12 1929

The foregoing field notes of the ~~survey of~~ independent resurvey of the fourth Standard Parallel south, through Range No. 14 West; and survey of the west boundary and subdivisional lines of Township No. 21 South, Range No. 14 West of the Salt Lake Base and Meridian, Utah,

executed by Willis W. Bandy under his special instructions dated March 18, 1921 having been critically examined, and the necessary corrections and explanations made, the said field notes, and the survey they describe, are hereby approved.

Samuel H. Johnson U. S. Supervisor of Surveys

I certify that the foregoing transcript of the field notes of the above described surveys in has been correctly copied from the original notes on file in this office.

**Blank**

**Page**

**Blank**

**Page**

"C"

4-473

RECEIVED

MAY 21 1928

Department Of The Interior

Public Survey Office

Salt Lake City, Utah

BOOK A-481

# FIELD NOTES

OF THE SURVEY OF THE

INDEPENDENT RESURVEY OF THE FOURTH STANDARD PARALLEL SOUTH THROUGH  
RANGE 15 WEST; ESTABLISHMENT OF ONE QUARTER SECTION CORNERS ON WEST  
BOUNDARY, AND SUBDIVISION OF T. 21 S., R. 15 W.

Of the Salt Lake Base And Meridian,

In the State of Utah

EXECUTED BY

Willis W. Bandy

In the capacity of U. S. Surveyor, under instructions dated March 18, 1921,  
issued by the United States Surveyor General to govern surveys included in  
Group No. 100, which were approved by the Commissioner of the General Land  
Office, March 25, 1921. Supplemental assignment instructions  
dated May 5, 1925.

Survey commenced August 3, 1925.

Survey completed October 1, 1925.

BOOK A-481

INDEX DIAGRAM.

		Township 21 South			Range 15 West						
		3	4	5	6	7	8	9	10		
15	6	89	5	69	4	56	3	42	2	27	1
	87		86		67		55		41		26
14	7	85	8	66	9	53	10	40	11	25	13
	83		82		65		52		38		24
13	18	81	17	64	16	51	15	36	14	22	18
	80		79		63		50		35		21
12	19	77	20	61	21	48	22	33	23	20	24
	76		75		60		47		32		19
11	30	74	29	59	28	46	27	31	26	18	25
	73		72		58		45		30		17
10	31	70	32	57	33	44	34	29	35	15	36

T. 21 S., R. 15 W.

Date Diagram.

	9-10-25	9-11-25	9-15-25	9-20-25	9-30-25	9-30-25	9-28-25
6	5	4	3	2	1		
9-9-25	9-11-25	9-15-25	9-20-25	9-29-25	8-8-25		
7	8	9	10	11	12		
9-4-25	9-4-25	9-14-25	9-19-25	9-19-25	8-8-25		8-8-25
18	17	16	15	14	13		
9-1-25	9-1-25	9-3-25	9-18-25	9-17-25	8-7-25		8-7-25
19	20	21	22	23	24		
8-25-25	8-27-25	8-28-25	9-2-25	9-17-25	8-6-25		8-6-25
30	29	28	27	26	25		
8-22-25	8-24-25	8-26-25	8-26-25	8-17-25	8-5-25		8-5-25
31	32	33	34	35	36		
8-22-25	8-24-25	8-26-25	8-17-25	8-5-25			

All lines surveyed by Willis W. Bandy, U.S. Surveyor.

Survey commenced August 3, 1925, and executed with Young and Son's solar transit No. 8513.

This township was surveyed in conjunction with the survey of T. 21 S., R. 14 W., of this group, and for full description and tests of the instrument, and the method of measurements, see finished notes of the survey of this township.

## Method And Order of Procedure

The Fourth Standard Parallel South, forms the north boundary of this township, and an independent resurvey was made of this boundary, superseding the survey made by Andrew J. Stewart Jr., in year 1882. No trace of the original survey of this boundary was found. The west boundary was surveyed by Collier and Gentry in 1909. A retracement was made of this boundary, and the marks on the original cors. changed so as to refer to T. 21 S., R. 16 W., and new cors. set to refer to T. 21 S., R. 15 W.

The south boundary of the township was surveyed west from the cor. Ts. 21 and 22 S., Rs. 14 and 15 W., to an intersection with the E. boundary of T. 22 S., R. 16 W., or at a point, South, 22.53 chs. dist. from the cor. Ts. 21 and 22 S., R. 16 W. This boundary was surveyed under group 99, Utah, and the official final returns of this boundary will be found in the notes of T. 22 S., R. 16 W.

The east boundary of the township was run north from the cor. Ts. 21 and 22 S., Rs. 14 and 15 W., to an intersection with the Fourth Standard Parallel South. The survey of this boundary will be found in the official final returns of T. 21 S., R. 14 W.

The township was subdivided from the south to the north, and from the east to the west.

The fractional distances were placed against the north and west boundaries of the township.

#### Independent Resurvey of The Fourth Standard Parallel South, Through Range 15 West, Superseding Survey Made by Andrew J. Stewart Jr., in Year 1882

From the standard cor. T. 20 S., Rs. 15 and 16, W., which is an iron post, 3 ins. diam., with brass cap, set, marked and witnessed as described in the final returns of the survey T. 21 S., R. 16 W.

Independent Resurvey Fourth Standard Parallel South,  
Through Range 15 West

East, on an independent resurvey line along the S. bdy.  
sec. 31

Over rolling mountainous land through scattered timber  
and undergrowth.

9.46 The closing cor. T. 21 S., Rs. 15 and 16 W., hereinafter  
described.

18.00 Low ridge, 80 ft. high, bears NW. and SE.

40.00 On rolling N. slope.

Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in  
the ground to bedrock and 10 ins. in a mound of stone,  
for standard  $\frac{1}{4}$  sec. cor., with brass cap marked.

SC  
 $\frac{1}{4}$  S31

1925

From which,

A pinon, 10 ins. diam., bears N. 69° E., 19 lks.  
dist., marked  $\frac{1}{4}$  S31 SC BT.

A juniper, 18 ins. diam., bears N. 54° W., 29 lks.  
dist., marked  $\frac{1}{4}$  S31 SC BT.

45.60 Spur, 30 ft. high, projects N.

56.60 Ravine, 200 ft. below spur, drains N.

58.40 Spur, 30 ft. high, projects N.

62.30 Ravine, 80 ft. below spur, drains N., heads 7.00 chs.  
to the S.

80.00 On rolling N. slope.

Set an iron post, 3 ft. long, 2 ins. diam., 20 ins. in  
the ground to bedrock and 10 ins. in a mound of stone,  
for standard cor. secs. 31 and 32, with brass cap  
marked.

S C  
T208 | R15W  
S31 | S32

1925

From which,

A pinon, 6 ins. diam., bears N. 26° 30' E., 17 lks.

dist., marked T208 R15W S32 SC BT.

Independent Resurvey of The Fourth Standard Parallel South, Through Range 15 West of the Meridian

CHAINS

1887 2008

A pinon, 8 ins. diam., bears N. 72°15' E., 192 lks. dist., marked T208 R15W S31 SC BT.

Land, rolling and mountainous with a general northerly exposure and drainage.

Soil, shallow, rocky, clay and sand loam; 3rd. rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush, and scrub mahogany.

Timber, scattered pinon and juniper.

Fair grazing.

East, along the S. bdy. of sec. 32.

Over broken mountainous land through scattered undergrowth and timber.

3.70 Spur, 20 ft. high, projects N. 30° E.

18.49 Point for the closing cor. secs. 5 and 6, hereinafter described.

40.00 On surfacerock, mark a cross (X), over which:

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in a mound of stone, for standard 1/4 sec. cor., with brass cap marked.

SC  
1/4 S32

1925

From which,

A juniper, 4 ins. diam., bears N. 85° W., 87 lks. dist., marked 1/4 S32 SC BT.

A juniper, 3 ins. diam., bears N. 10° W., 24 lks. dist., marked BT.

No suitable NE. bearing tree available.

53.00 Ravine, 30 ft. deep, drains E.; thence along bottom of ravine.

79.00 Leave bottom of ravine, drains N. 10° E.

80.00 On broken land.

Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the mound to bedrock and 10 ins. in a mound of stone, for standard cor. sec. 32 and 33.

Independent Resurvey of The Fourth Standard Parallel  
South, Through Range 15 West.

S	C
T20S	R15W
S32	S33

1925

From which,

A juniper, 8 ins. diam., bears N.  $31^{\circ}$  E., 382 lks.  
dist., marked T20S R15W S33 SC BT.

A juniper, 10 ins. diam., bears N.  $31^{\circ}30'$  W., 421 lks.  
dist., marked T20S R15W S32 SC BT.

Land, broken and mountainous with a general northerly  
exposure and drainage.

Soil, shallow, rocky, clay and sand loam; 3rd rate.

Undergrowth, scattered snagscale, mountain rush, scrub  
mahogany, buck and sage brush.

Timber, scattered juniper and pinon.

Fair grazing.

East, along the S. bdy. sec. 33.

Over broken mountainous land through scattered timber  
and undergrowth.

- 1.00 Ravine, 20 ft. deep, drains N., 4.00 chs. dist. to  
junction with ravine from the SW.
- 9.00 Spur, 100 ft. above cor., projects N.
- 10.58 Point for the closing cor. secs. 4 and 5, hereinafter  
described.
- 14.50 Ravine, 40 ft. deep, drains N., 4.00 chs. dist. to  
junction with main ravine from SE.
- 34.60 Main ravine, 110 ft. below spur, drains N.  $70^{\circ}$  W.
- 40.00 At the SE. point of spur.
- Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the  
ground, for standard  $\frac{1}{4}$  sec. cor., with brass cap marked.

SC
$\frac{1}{4}$ S33

1925

From which,

A juniper, 8 ins. diam., bears N.  $61^{\circ}$  E., 192 lks.

Independent Resurvey Fourth Standard Parallel South  
Through Range 15 West.

211220

Chains

dist., marked  $\frac{1}{4}$  S33 SC BT.

A juniper, 12 ins. diam., bears N.  $1^{\circ}$  W., 286 lks.

dist., marked  $\frac{1}{4}$  S33 SC BT.

62.10 Ravine, 40 ft. deep, drains S.  $20^{\circ}$  W.; thence along N. slope of spur.

80.00 On broken N. slope, 50 lks. S. of head of ravine and 520 ft. above point of crossing ravine.

Set an iron post, 3 ft. long, 2 ins. diam., 15 ins. in the ground to bedrock and 15 ins. in a mound of stone, for standard cor. secs. 33 and 34, with brass cap marked

S	C
T20S	R15W
S33	S34

1925

From which,

A pinon, 18 ins. diam., bears N.  $70^{\circ}$  E., 48 lks.

dist., marked T20S R15W S34 SC BT.

A pinon, 18 ins. diam., bears N.  $29^{\circ}$  W., 35 lks.

dist., marked T20S R15W S33 SC BT.

Land, broken and mountainous with a general northerly exposure and drainage.

Soil, shallow, rocky, clay and sand loam; 3rd rate.

Undergrowth, scattered shadscale, mountain rush, yellow top, buck and sage brush.

Timber, scattered juniper and pinon.

Fair grazing.

East, along the S. bdy. sec. 34.

Ascend abrupt N. slope of broken mountainous land through scattered undergrowth and timber.

.40 Draw which forms head of ravine, drains NW., heads 3.00 chs. to the SE.

4.30 Spur, 70 ft. above cor., projects N.

10.58 Point for the closing cor. secs. 3 and 4, hereinafter described:

24.00 Ravine, 40 ft. deep, drains S.  $20^{\circ}$  W.; thence along N. slope of spur.

Independent Resurvey of The Fourth Standard Parallel South Through Range 15 West.

Ravine

- 6.00 chs. dist., thence SE.
- 29.50 Rocky spur, 40 ft. above ravine, projects N., 5.00 chs. dist.
- 35.20 Recross same ravine as last, 40 ft. below spur, drains SE., 8.00 chs., thence S. 70° E.
- 37.10 Rocky spur, 40 ft. high, projects S., 8.00 chs. dist.
- 40.00 On SE. slope of surface rock, mark a cross (X), over which: Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in a mound of stone, for standard  $\frac{1}{4}$  sec. cor., with brass cap marked.

SC  
 $\frac{1}{4}$  S34

1925

From which,

- A pinon, 10 ins. diam., bears N. 26°30' E., 117 lks. dist., marked  $\frac{1}{4}$  S34 SC BT.
- A point on face of ledge, marked X B0 S34. SC, bears N. 33° W., 33 lks. dist.

- 47.60 Ravine, 320 ft. below spur, drains S. 20° E., 2.00 chs. dist. to junction with last ravine.
- 62.50 Spur, 210 ft. above ravine, projects S., 5.00 chs. dist.
- 80.00 On broken E. slope, 230 ft. below spur. Set an iron post, 3 ft. long, 2 ins. diam., 15 ins. in the ground to bedrock and 15 ins. in a mound of stone, for standard cor. secs. 34 and 35, with brass cap marked.

S C  
T208 | R15W  
S34 | S35

1925

From which,

- A pinon, 12 ins. diam., bears N. 72°15' E., 49 lks. dist., marked T208 R15W S35 SC BT.
- A pinon, 14 ins. diam., bears N. 57°30' W., 100 lks. dist., marked T208 R15W S34 SC BT.

Land, broken and mountainous with a general easterly exposure and drainage.

Independent Resurvey of the Fourth Standard Meridian  
South Through Range 15 East. National 1898

Chains

Bridges

Soil, shallow, rocky; clay and sand loam; 3rd rate.

Undergrowth, scattered shadscale, mountain rush, yellow  
top, scrub mahogany, buck and sage brush..

Timber, scattered juniper and pinon. 08.25

Fair grazing. 01.75

East, along the S. bdy. sec. 35. 00.04

Over broken mountainous land through scattered timber  
and undergrowth.

10.34 Point for the closing cor. secs. 2 and 3, hereinafter  
described.

22.00 Ravine, 230 ft. below standard cor. secs. 34 and 35,  
drains S., 13.50 chs. to main ravine.

40.00 On surfacerock, mark a cross (X), over which:  
Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the  
mound of stone, for standard  $\frac{1}{4}$  sec. cor., with brass  
cap marked.

SC  
 $\frac{1}{4}$  S35

1925

From which,

A point on face of ledge, marked X B0 S35 SC, bears  
N. 45° E., 3 lks. dist.

A juniper, 12 ins. diam., bears N. 55° W., 45 lks.  
dist., marked  $\frac{1}{4}$  S35 SC BT.

47.10 Spur, 640 ft. above ravine, projects S.

57.20 Ravine, 270 ft. below spur, drains S. 20° E., heads  
4.00 chs. to the N. 20° W.

55.00 Rocky spur, 110 ft. above ravine, projects SE.

80.00 On broken SE. slope, 400 ft. below spur.  
Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in  
the ground, for standard cor. secs. 35 and 36, with  
brass cap marked.

Independent Resurvey of the Fourth Standard Parallel South  
Through Range 15 West

## Chains.

	S	C
T208	R15W	
S35	S36	

1925

from which

A juniper, 10 ins.diam., bears N. 39° E. 74 lks.  
dist., marked BT. Tree too scrubby for other  
marks.

A juniper, 10 ins.diam. Bears N. 86° W. 32 lks.  
dist., marked T208 R15W S35 SC BT

Land, broken and mountainous with a general southerly  
exposure and drainage.

Soil, shallow, rocky, clay and sand loam; 3d rate.

Undergrowth, scattered shadscale, mountain rush, yellow  
top, buck and sage brush.

Timber, scattered juniper and pinon. Fair grazing.

East along the S. bdy. Sec.36

Over broken mountainous land; through scattered timber  
and undergrowth.

10.03 Point for the closing cor. secs.1 and 2. Hereinafter  
described.

32.00 Ravine, 600 ft. below the standard cor. secs.35 and 36,  
drains NE. Continue descent.

40.00 On broken land, 100 ft. below ravine,  
Set an iron post, 3 ft.long, 1 in.diam., 20 ins.in the  
ground to bed-rock, and 10 ins.in a mound of stone,  
for standard  $\frac{1}{4}$  sec.cor., with brass cap marked

	SO
	$\frac{1}{4}$ S36

1925

From which

A juniper, 4 ins.diam., bears N. 3° E. 151 lks.  
dist., marked BT

A juniper, 6 ins.diam. bears N. 32° 45' W. 135  
lks.dist., marked BT

Independent Resurvey of the Fourth Standard Meridian South Through Range 15 West.

Chains.  
61.00

Ravine at base of spur, 80 ft. below the  $\frac{1}{4}$  sec. cor., drains N. 30° E.

80.00

At the E. edge of timber, bears N. and S. Set an iron post, 3 ft. long, 3 ins. diam., 27 ins. in the ground, for standard cor. T. 20 S. Rs. 14 and 15 W., with brass cap marked

SC  
T20S  
R15W | R14W  
S36 | S31

1925

From which

A juniper, 8 ins. diam., bears N. 61° 30' W. 200 lks. dist., marked T20S R15W S36 SC BT

No other suitable bearing trees available.

From this cor. the closing cor. T. 21 S. Rs. 14 and 15 W. bears East 10.02 chs. dist., a 3-in. iron post marked and witnessed as described in the finished notes of the survey of T. 21 S. R. 14 W. of this group.

Land, broken and mountainous with a general northeasterly exposure and drainage.

Soil, shallow, rocky, clay and sand loam; 3d rate.

Undergrowth, scattered shadscale, mountain rush, yellow top, buck, and sage brush.

Timber, scattered juniper and pinon. Fair grazing.

Retracement of the East Boundary of Township 21 South Range 16 West and Establishment of One-quarter Section Corners for Range 15 West.

From the corner of Tps. 21 and 22 S. R. 16 W., which is North 22.53 chs. from the closing cor. of Tps. 21 and 22 S. R. 15 W., both corners being iron posts, 3 ins. diam., with brass caps, set, marked, and witnessed as described in the finished field notes of the survey of T. 22 S. R. 15 W.

-191-

Retracement of the East Boundary of Township 21 South Range 16 West  
and Establishment of One-quarter Section Corners for  
Range 15 West

## Chains.

North, on retracement line along the E. bdy. sec.36,

Note: For the topography of this boundary see finished notes of the survey of T. 21 S. R. 16 W.

17.475 Point midway between the closing cor. of Tps. 21 and 22

S. R. 15 W. and the closing cor. of secs.30 and 31,

Set an iron post 3 ft. long, 1 in. diam., 27 ins. in the ground for  $\frac{1}{4}$  sec. cor. sec.31 only, with brass cap marked

$\frac{1}{4}$  S31

1925

From which

A juniper, 10 ins. diam., bears N. 67° E. 140 lks. dist., marked  $\frac{1}{4}$  S31 BT.

A juniper, 6 ins. diam., bears S. 45° E. 43 lks. dist., marked  $\frac{1}{4}$  S31 BT.

40.10 The original  $\frac{1}{4}$  sec. cor. secs.31 and 36, which is an iron post, 1 in. diam., with brass cap, set, marked and witnessed as described in the finished notes of the survey of T. 21 S. R. 15 W.

I efface the marks on corner that pertain to sec.31.

57.48 The closing cor. secs.30 and 31, hereinafter described.

80.28 The original cor. of secs.25, 30, 31, and 36, which is an iron post, 3 ins. diam., with brass cap, set, marked and witnessed as described in the finished notes of the survey of T. 21 S. R. 16 W.

I efface the marks on corner and bearing trees that pertain to R. 15 W.

North, along the E. bdy. sec.25,

17.095 Point midway between the closing corner of Secs.19 and 30 and the closing corner secs.30 and 31.

Mark a cross (X) on the surface rock, over which

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in a mound of stone, for  $\frac{1}{4}$  sec. cor. sec.30 only, with

~~121~~  
Retracement of the East Boundary of Township 21 South, Range 15 West  
and Establishment of One-quarter Section Corners for  
Range 15 West.

- Chains.
- brass cap marked
- |  
‡ S30  
1925
- From which
- A juniper, 6 ins. diam., bears S. 47° E. 51 lks. dist., marked ‡ S30 BT
- No other suitable bearing tree available.
- 39.82 The original  $\frac{1}{4}$  sec. cor. secs. 25 and 30, which is an iron post, 1 in. diam., with brass cap, set, marked, and witnessed as described in the finished notes of the survey of T. 21 S. R. 16 W.
- I efface the marks on this cor. and bearing trees that pertain to R. 15 W.
- 56.99 The closing cor. secs. 19 and 30, hereinafter described.
- 80.00 The original cor. secs. 19, 24, 25, and 30, which is an iron post, 3 ins. diam., with brass cap, set, marked, and witnessed as described in the finished notes of the survey of T. 21 S. R. 16 W.
- I efface the marks on corner that pertain to R. 15 W.
- 
- North along the E. bdy. sec. 24,
- 16.91 Point midway between the closing corner secs. 18 and 19 and the closing cor. secs. 19 and 30,
- Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground to bed-rock, and 10 ins. in a mound of stone, for  $\frac{1}{4}$  sec. cor. sec. 19 only, with brass cap marked
- |  
‡ S19  
1925
- From which
- A juniper, 12 ins. diam., bears S. 71° 30' E. 95 lks. dist., marked ‡ S19 BT
- No other suitable bearing tree available.
- Deposit a gray limestone 6 x 4 x 4 ins. at base of post, marked with a cross (X).
- 40.16 The original  $\frac{1}{4}$  sec. cor. secs. 19 and 24, which is an

Reestablishment of the East Boundary of Township 21 South, Range 16 West  
and Establishment of One-quarter Section Corners for  
Range 15 West

Chains.

- 56.83 The closing cor. of secs. 18 and 19, hereinafter described.
- 59.16 The original cor. of secs. 13, 18, 19, and 24, which is an iron post, 3 ins. diam., with brass cap, set, marked, and witnessed, as described in the finished notes of the survey of T. 21 S. R. 16 W.
- I efface the marks on corner and bearing tree that pertain to R. 15 W.

- 16.66 Point midway between the closing corner of secs. 7 and 18 and the closing cor. of secs. 18 and 19.
- On surface rock mark a cross (X), over which Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in a mound of stone, for  $\frac{1}{4}$  sec. cor. sec. 18 only, with brass cap marked

|  $\frac{1}{4}$  S18  
1925

From which

- A juniper, 10 ins. diam., bears N. 7° E. 124 lks. dist., marked  $\frac{1}{4}$  S18 BT
- A juniper, 6 ins. diam., bears S. 8° E. 111 lks. dist., marked  $\frac{1}{4}$  S18 BT

- 40.27 The original  $\frac{1}{4}$  sec. cor. secs. 13 and 18, which is an iron post, with brass cap, set, marked, and witnessed as described in the finished notes of the survey of T. 21 S. R. 16 W.
- I efface the marks on post and bearing tree that pertain to R. 15 W.
- 56.65 The closing cor. secs. 7 and 18, hereinafter described.

Retracement of the East Boundary of Township 21 S. R. 16 W.  
and Establishment of Corner Markers for  
Range 15 West

.aniaso

Chains.  
79.57

The witness corner to the original corner of secs. 7, 12, 13 and 18, which is an iron post, 3 ins. diam., with brass cap, set, marked, and witnessed as described in the finished notes of the survey of T. 21 S. R. 16 W. I efface the marks on corner and bearing trees that pertain to R. 15 W.

80.37

The true point for the corner of secs. 7, 12, 13, and 18 which is a cross (X) on the surface rock, witnessed by a mound of stone, 2 ft. base, 1½ ft. high W. of corner point.

North, along the E. bdy. sec. 12, from the true point for the original corner of secs. 7, 12, 13, and 18.

16.41

Point midway between the closing corner of secs. 6 and 7 and the closing corner of secs. 7 and 18.

On surface rock mark a cross (X) over which

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in a mound of stone, for ¼ sec. cor. sec. 7 only, with brass cap marked

¼ S7  
1925

From which

A juniper, 6 ins. diam. bears N. 13° 15' E. 74 lks. dist., marked ¼ S7 BT

A pinon, 6 ins. diam., bears S. 35° 45' E. 240 lks. dist., marked ¼ S7 BT

40.36

The original ¼ sec. cor. of secs. 7 and 12, which is an iron post, 1 in. diam., with brass cap, set, marked, and witnessed as described in the finished notes of the survey of T. 21 S. R. 16 W.

I efface the marks on this cor. that pertain to R. 15 W.

56.54

The closing cor. of secs. 6 and 7, hereinafter described.

80.31

The original corner of secs. 1, 6, 7, and 12, which is an iron post, 3 ins. diam., with brass cap, set, marked, and witnessed as described in the finished notes of the survey of T. 21 S. R. 16 W.

.noo

Retracement of the East Boundary of Township 21 South, Range 16 West,  
and Establishment of One-quarter Section Corners for  
Range 15 West.

Chains I. efface the marks on this cor. and bearing tree that pertain to R. 15 W.

North along the E. bdy. sec.1

16.23 Northing of 40.00 chs. from the closing corner of secs. 6 and 7.

Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground to bed-rock, and 12 ins. in a mound of stone, for  $\frac{1}{4}$  sec. cor. sec. 6 only, with brass cap marked

$\frac{1}{4}$  S6

1925

From which

A pinon 18 ins. diam. bears N.  $60^{\circ} 30'$  E. 221 lks. dist., marked  $\frac{1}{4}$  S 6 BT

A pinon 20 ins. diam. bears S.  $79^{\circ} 15'$  E. 118 lks. dist., marked  $\frac{1}{4}$  S6 BT

32.75 The closing corner of T. 21 S. Rs. 15 and 16 W., which is an iron post, 3 ins. diam., with brass cap, set, marked and witnessed as described in the finished notes of the survey of T. 21 S. R. 16 W.

Subdivision T. 21 S. R. 15 W.

From the corner of secs. 1, 2, 35, and 36, on the S. bdy. of the township, which is an iron post, 2 ins. diam., with brass cap, set, marked and witnessed as described in the finished notes of the survey of T. 22 S. R. 15 W.

N.  $0^{\circ} 01'$  W. between secs. 35 and 36,

The line to the north of this corner passes over broken ledges, and through a scattered growth of timber and undergrowth. To pass ledges I offset as follows, along

the E. base of ledges.

East 9.77 chs.

N.  $0^{\circ} 01'$  W. 40.00 chs.

West 9.77 chs. to

40.00 Point on true line in bottom of ravine, drains S.  $30^{\circ}$  E.

Subdivision T<sub>21</sub> S. R. 15 W.

Chains. As there is no water course in bottom of ravine, at this point

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked

$\frac{1}{4}$  S35 | S36  
1925

from which

A pinon, 8 ins. diam., bears S. 64° 30' E. 416 lks. dist. marked  $\frac{1}{4}$  S36 BT

A juniper, 6 ins. diam., bears N. 61° W. 110 lks. dist., marked  $\frac{1}{4}$  S35 BT

As broken ledges make it impracticable to continue on true line north from this cor. I offset along the east base of ledges as follows:

S. 89° 59' E. 12.11 chs.

N. 0° 01' W. 40.00 chs.

N. 89° 59' W. 6.61 chs. to

80.00 Point on line between secs. 25 and 36, 5.50 chs. S. 89° 59' E. from true point for cor. of secs. 25, 26, 35, and 36.

As the true point for the corner of said sections falls on the East point of rocky spur in ledges, where it is impracticable to set corner; therefore at this point, on broken east slope of ledges,

Set an iron post, 3 ft. long, 2 ins. diam. 27 ins. in the ground, for witness corner to the corner of secs. 25, 26, 35, and 36; with brass cap marked

WC T21S R15W  
 $\frac{1}{4}$  S26 | S25  
 $\frac{1}{4}$  S35 | S36  
1925

from which

A point on face of ledge, marked X B0 S36 bears S. 16° E. 9 lks. dist.

A juniper, 10 ins. diam., bears N. 49° W. 17 lks. dist., marked T21S R15W S26 BT

No other suitable accessories available.

Land, broken by ledges, with a general easterly exposure and drainage.

Subdivision T. 21 S. R. 15 W.

Chains

Soil, shallow, rocky, clay, and sand loam; 3d rate.

Undergrowth, scattered shadscale, mountain rush, yellow top, and sagebrush.

Timber, scattered scrub juniper and pinon. Fair grazing.

East on random line bet. secs. 25 and 36, counting distance from the true point for corner of secs. 25, 26, 35, and 36, which is N. 89° 59' W. 5.50 chs. dist. from the witness cor. to said secs.

40.00 Set temp. 1/4 sec. cor.

79.92 Intersect the E. bdy. of the township 3 lks. N. of the corner of secs. 25, 30, 31, and 36, which is an iron post 2 ins. diam., with brass cap, set, marked, and witnessed as described in the finished notes of the survey of T. 21 S. R. 14 W. Thence

N. 89° 59' W. on true line between secs. 25 and 36 Ascend gradually over rolling land; through scattered timber and undergrowth.

23.00 Land becomes broken, bears N. and S.

39.96 On gradual E. slope, 190 ft. above sec. cor. Set an iron post, 3 ft. long, 1 in. diam., 14 ins. in the ground to bed-rock, and 16 ins. in a mound of stone, for 1/4 sec. cor., with brass cap marked

1/4      S25  
          -----  
          S36  
          1925

from which

A juniper, 4 ins. diam. bears S. 88° 30' E. 220 lks. dist., marked 1/4 S36 BT

A juniper, 3 ins. diam., bears N. 70° 45' W. 160 lks. dist., marked BT

55.00 Base of abrupt ascent over broken E. point of spur, bears N. and S.

74.42 The witness cor. to the cor. of secs. 25, 26, 35, and 36.

79.92 The true point for corner of secs. 25, 26, 35, and 36, 430 ft. above the 1/4 sec. cor.

## Subdivision T-121-S-15 W.

Chains. Land, broken and mountainous with general easterly exposure and drainage.  
 Soil, shallow, rocky, clay, and sand loam; 3d rate.  
 Undergrowth, scattered shadscale, mountain rush, yellow top, and sagebrush.  
 Timber, scattered scrub juniper and pinon. Fair grazing.

N.  $0^{\circ} 01' W.$  between secs. 25 and 26 from the true point for corner of secs. 25, 26, 35, and 36, which is N.  $89^{\circ} 59' W.$  5.50 chs. from the witness cor. to said secs.

The line to the north of this corner point passes over broken ledges, through scattered timber and undergrowth. To avoid ledges I offset as follows:

East 12.10 chs.

N.  $0^{\circ} 01' W.$  40.00 chs. At 30.00 chs. on this course, ravine drains N.  $70^{\circ} E.$

West 12.10 chs. to

40.00 Point on true line, on broken E. slope.

Set an iron post, 3 ft. long, 1 in. diam., 15 ins. in the ground to bed-rock, and 15 ins. in a mound of stone, for  $\frac{1}{4}$  sec. cor., with brass cap marked

$\frac{1}{4}$   
 S26 | S25  
 1925

from which

A juniper, 3 ins. diam., bears N.  $28^{\circ} W.$  55 lks. dist., marked BT

No other suitable accessories available.

49.00 Spur, 130 ft. above the  $\frac{1}{4}$  sec. cor., projects E.; descend abrupt N. slope of spur.

77.40 Ravine, 670 ft. below spur, drains S.  $60^{\circ} E.$ ; ascend abrupt SW. slope.

80.00 On abrupt SW. slope, 20 ft. above ravine  
 Set an iron post, 3 ft. long, 2 ins. diam., 15 ins. in the ground to bed-rock, and 15 ins. in a mound of stone, for cor. of secs. 23, 24, 25, and 26, with brass cap marked

Subdivision, T. 21 S., R. 15 W.

Onains

T21S	R15W
S23	S24
S26	S25

Deposit a limestone, 10 x 7 x 4 ins., at base of post, marked with a cross (X).

No other suitable accessories available.

Land, broken and mountainous with a general easterly exposure and drainage.

Soil, shallow, loose, sand and clay loam; 3rd rate.

Undergrowth, scattered shadscale, mountain rush, yellow top and sagebrush.

Timber, scattered scrub juniper and pinon.

Fair grazing.

S. 89°59' E., on random line bet. secs. 24 and 25.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

79.92 Intersect the E. bdy. of the township, at the cor. secs. 19, 24, 25 and 30, which is an iron post, 2 ins. diam., with brass cap, set, marked and witnessed as described in the finished notes of the survey T. 21 S., R. 14 W.

Thence, N. 89°59' W., on true line bet. secs. 24 and 25.

Over rolling and broken land through scattered undergrowth.

39.96 On gradual E. slope.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

S24
$\frac{1}{4}$
S25

1925

Raise a mound of stone, 3 ft. base, 2 ft. high N. of cor.

42.00 Wash, 30 lks. wide, 3 ft. deep, drains N. 70° E.

45.00 Base of gradual ascent over broken NE. slope of spur; bears N. and S.

74.00 Top of rocky spur, 370 ft. above sec. cor., projects SE.; descend gradual SW. slope of spur.

Subdivision, T. 21 S., R. 15 W.

entire

Chains

79.92 The cor. secs. 23, 24, 25 and 36, 50 ft. below top of spur.

Land, rolling and broken, with a general easterly exposure and drainage.

Soil, shallow, rocky, clay and sand loam; 3rd rate.

Undergrowth, scattered shadscale, mountain rush, yellow top and blackbrush.

No timber.

Fair grazing.

N. 0°01' W., bet. secs. 23 and 24,

Ascend abruptly over broken SW. slope of rocky spur, through scattered undergrowth and timber.


9.80 Rocky spur, projects SE., 460 ft. above cor.; descend abrupt NE. slope of spur.

26.00 Ravine, 120 ft. below spur, drains E.; ascend abrupt S. slope of spur.

33.10 Spur, 160 ft. above ravine, projects E.; descend gradual N. slope of spur.

40.00 On broken N. slope of spur, 70 ft. below top.

Set an iron post, 3 ft. long, 1 in. diam., 15 ins. in the ground to bedrock and 15 ins. in a mound of stone, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

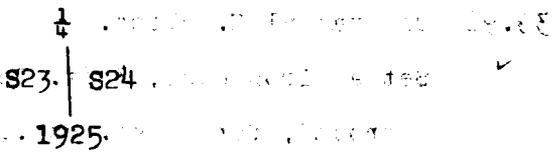

From which,

A pinon, 10 ins. diam., bears N. 59°30' E., 132 lks. dist., marked  $\frac{1}{4}$  S24 BT.

A pinon, 10 ins. diam., bears N. 70°45' W., 113 lks. dist., marked  $\frac{1}{4}$  S23 BT.

44.00 Ravine, 80 ft. below the  $\frac{1}{4}$  sec. cor., drains E.; ascend gradual S. slope.

52.60 Spur, 90 ft. above ravine; projects E.; descend gradual N. slope.

Subdivision, T21S R15W, R. 15 W.

chain

63.50 Ravine, 80 ft. below spur, drains S. 60° E.; ascend abrupt S. slope.

74.60 Spur, 350 ft. above ravine, projects E.; descend gradual N. slope.

80.00 On gradual N. slope of spur near bottom of ravine, 80 ft. below top of spur.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. secs. 13, 14, 23 and 24, with brass cap marked.

T21S	R15W
S14	S13
S23	S24

1925

From which,

A juniper, 8 ins. diam., bears N. 22°15' E., 60 lks. dist., marked T21S R15W S13 BT.

A pinon, 10 ins. diam., bears S. 8°30' E., 60 lks. dist., marked T21S R15W S24 BT,

A pinon, 11 ins. diam., bears S. 34° W., 172 lks. dist., marked T21S R15W S23 BT.

A pinon, 13 ins. diam., bears N. 39° W., 150 lks. dist., marked T21S R15W S14 BT.

Land, broken and mountainous with a general north and southerly exposure and drainage.

Soil, shallow, rocky, clay and sand loam; 3rd rate.

Undergrowth, scattered shadscale, mountain rush, yellow to and sagebrush.

Timber, scattered scrub juniper and pinon.

Fair grazing.

S. 89°59' E., on random line bet. secs. 13 and 24.

40.00 Set temp. 1/4 sec. cor.

80.00 Intersect the E. bdy. of the township, 9 lks. N. of the cor. secs. 13, 18, 19 and 24, which is an iron post, 2 ins. diam., with brass cap, set, marked and witnessed

as described in the finished notes of the survey

Subdivision, T. 21 S., R. 15 W.

Onains	T. 21 S., R. 14 W.
	Thence,
	N. 89°55' W., on true line bet. secs. 13 and 24.
	Ascend gradually over broken E. slope of mountainous land through scattered undergrowth and timber.
15.00	Base of spur, bears NW. and SW.
40.00	On broken N. slope of spur.
	Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked.
	$\frac{S13}{\frac{1}{4} S24}$ 1925
	From which,
	A pinon, 8 ins. diam., bears S. 57° W., 195 lks. dist., marked $\frac{1}{4}$ S24 RT.
	No other suitable accessories available.
54.80	Rocky spur, 1320 ft. above cor. on E. bdy. of the township projects S. 60° E.; descend abrupt SW. slope of spur.
78.80	Ravine, 150 ft. below spur, drains SE.
80.00	The cor. secs. 13, 14, 23 and 24.
	Land, broken and mountainous with a general northerly and southerly exposure and drainage.
	Soil, shallow, rocky, clay, and sand loam; 3rd rate.
	Undergrowth, scattered shadscale, mountain rush, yellow to, black and sage brush.
	Timber, scattered scrub juniper and pinon.
	-----
	N. 0°01' W., bet. secs. 13 and 14.
	Over broken mountainous land through scattered timber and undergrowth.
.80	Ravine, 20 ft. deep, drains S. 60° E., heads 10.00 obs. to the W.; ascend abrupt S. slope of spur.
6.80	Rocky spur, 150 ft. above sec. cor., projects E.; descend abrupt N. slope of spur.
40.00	On abrupt N. slope:

Subdivision, T. 21 S., R. 15 W.

Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground to bedrock and 10 ins. in a mound of stone, for cor. sec. 11, 12, 13 and 14, with brass cap marked.

S14 | S13

1925

From which,

A pinon, 10 ins. diam., bears S. 10° E., 40 lks.

dist., marked  $\frac{1}{4}$  S13 BT.

A pinon, 8 ins. diam., bears S. 60°30' W., 65 lks.

dist., marked  $\frac{1}{4}$  S14 BT.

48.00 Ravine, 330 ft. below spur, drains E., ascend abrupt S. slope.

80.00 On abrupt S. slope, 620 ft. above ravine.

Set an iron post, 3 ft. long, 2 ins. diam., 12 ins. in the ground to bedrock and 18 ins. in a mound of stone, for cor. secs. 11, 12, 13 and 14, with brass cap marked.

T21S | R15W  
S11 | S12  
S14 | S13

1925

From which,

A pinon, 14 ins. diam., bears N. 62°45' E., 79 lks.

dist., marked T21S R15W S12 BT.

A pinon, 8 ins. diam., bears S. 85° E., 95 lks.

dist., marked T21S R15W S13 BT.

A pinon, 10 ins. diam., bears S. 35° W., 44 lks.

dist., marked T21S R15W S14 BT.

A pinon, 8 ins. diam., bears N. 25° W., 12 lks.

dist., marked T21S R15W S11 BT.

Land, broken, and mountainous with a general northerly and southerly exposure and drainage.

Soil, shallow, rocky, clay and sand loam; 3rd rate.

Undergrowth, scattered shadscale, mountain rush, yellow top and sagebrush.

Timber, scattered scrub juniper and pinon.

Subdivision T. 21 S. R. 15 W.

Chains

S. 89°55' E., on random line bet. secs. 12 and 13.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

80.14 Intersect the E. bdy. of the township, at the cor. of secs. 7, 12, 13 and 18, with is an iron post, 2 ins. dia with brass cap; set, marked and witnessed as described in the finished notes of the survey T. 21 S., R. 14 W.

Thence,

N. 89°55' W., on true line bet. secs. 12 and 13.

Over rolling land through scattered undergrowth and timber.

10.00 Base of broken mountainous land, bears N. and SE.

39.00 Spur, 850 ft. above cor., projects S. 60° E.; descend abrupt SW. slope of spur.

40.07 On broken SW. slope.

Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground to bedrock and 20 ins. in a mound of stone, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

$$\frac{S12}{S13}$$
 1925

From which,

A pinon, 14 ins. diam., bears N. 75°30' E., 83 lks. dist., marked  $\frac{1}{4}$  S12 BT.

No other suitable bearing tree available.

57.20 Ravine, 240 ft. below spur, drains SE.; ascend abrupt NE. slope of spur.

72.00 Rocky spur, 490 ft. above ravine, projects SE.; descend abrupt SW. slope.

80.14 The cor. secs. 11, 12, 13 and 14, 30 ft. below spur.

Land, rolling and broken, with a general southeasterly exposure and drainage.

Soil, shallow, rocky, clay and sand loam; 3rd rate.

Undergrowth, scattered shadscale, mountain rush, yellow top, sage, and black brush.

Timber, scattered scrub juniper and pinon.

Fair grazing.

Subdivision, T. 21 S., R. 15 W.

Chains

N. 0°01' W., bet. secs. 11 and 12.

Ascend abruptly over broken SW. slope of mountainous land through scattered timber and undergrowth.

10.00 Spur, 150 ft. above cor., projects SE.; descend gradually along broken E. slope.


16.00 Head of ravine, 50 ft. below spur, drains S. 60° E.; continue descent.

21.00 Low spur, projects E.

30.50 Ravine, 320 ft. below spur at the 10.00 chs. point, drains N. 70° E.

40.00 On low spur, 60 ft. above ravine, projects E.

Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground to bedrock and 10 ins. in a mound of stone, for  $\frac{1}{4}$  sec. cor., with brass cap marked.



From which,

A juniper, 10 ins. diam., bears S. 70° E., 30 lks. dist., marked  $\frac{1}{4}$  S12 BT.

A pinon, 12 ins. diam., bears S. 77° W., 154 lks. dist.; marked  $\frac{1}{4}$  S11 BT.

49.10 Ravine, 60 ft. below  $\frac{1}{4}$  sec. cor.; drains E.; ascend abrupt S. slope of spur.

59.20 Rocky spur, 210 ft. above ravine, projects E.; descend abrupt N. slope of spur.

69.00 Ravine, 300 ft. below spur, drains E.; heads 10.00 chs. to the W.; ascend gradual S. slope of spur.

77.60 Spur, 20 ft. above ravine, projects N. 70° E.; descend gradual N. slope of spur.

80.00 On gradual N. slope of spur, 20 ft. below top.

Set an iron post, 3 ft. long, 2 in. diam., 27 ins. in the ground, for cor. secs. 1, 2, 11 and 12, with brass cap marked.

Subdivision, T. 21 S., R. 15 W.

Chains

T21S	R15W
S2	S1
S11	S12

1925

From which,

A pinon, 8 ins. diam., bears N. 85° E., 25 lks. dist., marked T21S R15W S1 BT.

A pinon, 6 ins. diam., bears S. 36° E., 107 lks. dist., marked T21S R15W S12 BT.

A pinon, 12 ins. diam., bears S. 80°30' W., 74 lks. dist., marked T21S R15W S11 BT.

A pinon, 12 ins. diam., bears N. 44° W., 94 lks. dist., marked T21S R15W S2 BT.

Land, broken and mountainous with a general easterly drainage, and a southerly and northerly exposure.

Soil, shallow, rocky, clay and sand loam; 3rd rate.

Undergrowth, scattered shadscale, mountain rush, yellow top and blackbrush.

Timber, scattered scrub juniper and pinon.

Fair grazing.

S. 89°55' E., on random line bet. secs. 1 and 12.

40.00 Set temp. 1/4 sec. cor.

80.00 Intersect the E. bdy. of the township, 14 lks. S. of the cor. secs. 1, 6, 7 and 12, which is an iron post, 2 ins. diam., with brass cap, set, marked and witnessed as described in the finished notes of the survey

Thence,

S. 89°59' W., on true line bet. secs. 1 and 12.

Over rolling land through scattered undergrowth and timber.

34.00 Base of broken mountainous land, bears N. and S.

40.00 On broken E. slope: Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/4 sec. cor., with brass cap marked.

Subdivision, T. 21 S., R. 15 W.

Chains

S1

S12

1925

From which,

A juniper, 6 ins. diam., bears N. 67° E., 230 lks. dist., marked  $\frac{1}{4}$  S1 BT.

A juniper, 8 ins. diam., bears S. 68° W., 340 lks. dist., marked  $\frac{1}{4}$  S12 BT.

76.80 Spur, 900 ft. above base of mountains, projects NE.; descend gradual NW. slope.

80.00 The cor. secs. 1, 2, 11 and 12, 30 ft. below spur. Land, rolling, broken, and mountainous with a general easterly exposure and drainage. Soil, shallow, rocky, clay, and sand loam; 3rd rate. Undergrowth, scattered shadscale, mountain rush, yellow top and sagebrush.

Timber, scattered scrub juniper and pinon.

Fair grazing.

N. 0°01' W., on true line bet. secs. 1 and 2.


Descend abruptly over broken N. slope of mountainous land through scattered undergrowth and timber.

26.10 Bottom of large draw, 580 ft. below cor., drains E.; ascend abrupt S. slope.

39.00 Spur, 340 ft. above draw, projects E.; descend gradual N. slope.

40.00 On broken N. slope, 20 ft. below spur.

Set an iron post, 3 ft. long, 1 in. diam., 8 ins. in the ground to bedrock and 22 ins. in a mound of stone, for  $\frac{1}{4}$  sec. cor., with brass cap marked.



From which,

A pinon, 12 ins. diam., bears S. 81° E., 16 lks. dist., marked  $\frac{1}{4}$  S1 BT.

Subdivision, T. 21 N. R. 35 W.

Chains

enisd0

A pinon, 6 ins. diam., bears N. 58° W., 50 lks. dist., marked  $\frac{1}{4}$  S2 BT.

52.00 Ravine, 300 ft. below the  $\frac{1}{4}$  sec. cor., drains E., heads 15.00 chs. to the W.; ascend abrupt S. slope.

57.03 Intersect the Fourth Standard Parallel South, East, 10.0 chs. dist., from the standard cor. secs. 35 and 36, heretofore described.

At point of intersection, on abrupt S. slope, 20 ft. above ravine.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for closing cor. secs. 1 and 2, with brass cap marked.

T20S R15W  
S36

S2 | S1  
T21S | R15W  
C C

1925

From which,

A juniper, 6 ins. diam., bears S. 52° E., 69 lks. dist., marked BT.

A juniper, 10 ins. diam., bears S. 65° 15' W., 165 lks. dist., marked BT.

Trees too scrubby for other marks.

Land, broken and mountainous with a general easterly exposure and drainage.

Soil, shallow, loose, rocky, sand, and clay loam; 3rd rate.

Undergrowth, scattered shadscale, mountain rush, yellow top, sage and black brush.

Timber, scattered scrub juniper and pinon.

Fair grazing.

18 38

1891

from which

A corner of sec. 35 and 36

marked with

Subdivision, T. 21 S., R. 15 W.

Chains

From the cor. secs. 2, 3, 34 and 35, on the S. bdy. of the township, which is an iron post, 2 ins. diam., with brass cap, set, marked and witnessed as described in the finished notes of the survey T. 22 S., R. 15 W.


N. 0° 01' W., bet. secs. 34 and 35.

Ascend abrupt S. slope of broken mountainous land through scattered timber and undergrowth.

22.70 Spur, 320 ft. above cor., projects E.; descend abrupt N. slope of spur.

39.90 Wash in bottom of ravine, 320 ft. below spur, drains N. 60° E.; ascend abrupt S. slope of spur.

40.00 On surfacerock, mark a cross (X), over which:  
Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in a mound of stone, for  $\frac{1}{4}$  sec. cor., with brass cap marked:



From which,

A pinon, 20 ins. diam., bears S. 52° E., 43 lks. dist., marked  $\frac{1}{4}$  S35 BT.

A point on face of ledge, marked X BO S34, bears N. 45° W., 3 lks. dist.

47.00 Rocky spur, 110 ft. above ravine, projects E; 20.00 chs. dist.; descend abrupt N. slope of spur.

53.30 Ravine, 130 ft. below spur, drains S. 60° E.; ascend abrupt S. slope of spur.

75.00 Spur, 200 ft. above ravine, projects SE.; continue ascent.

80.00 On surfacerock, 30 ft. above spur, mark a cross (X), over which.

Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in a mound of stone, for cor. secs. 26, 27, 34 and 35, with brass cap marked.

Subdivision of T. 21 S. R. 15 W.

Chains

ended

T21S	R15W
S27	S26

S34	S35
-----	-----

1925

From which,

A juniper, 12 ins. diam., bears N.  $89^{\circ}30'$  E., 105 lks. dist., marked T21S R15W S26 BT.

A juniper, 8 ins. diam., bears S.  $83^{\circ}$  E., 44 lks. dist., marked T21S R15W S35 BT.

A pinon, 8 ins. diam., bears S.  $80^{\circ}$  W., 197 lks. dist., marked T21S R15W S34 BT.

A juniper, 10 ins. diam., bears N.  $73^{\circ}30'$  W., 82 lks. dist., marked T21S R15W S27 BT.

Land, broken and mountainous with a general northerly and southerly exposure and drainage.

Soil, shallow, rocky, clay and sand loam; 3rd rate.

Undergrowth, scattered shadscale, mountain rush, yellow top, scrub mahogany, black and sage brush.

Timber, scattered scrub juniper and pinon.

Fair grazing.

East, on random line bet. secs. 26 and 35.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

79.58 Intersect the N. and S. line, 9 lks. S. of the true point for the cor. secs. 25, 26, 35 and 36, which is N.  $89^{\circ}59'$  W., 5.50 chs. dist. from the witness cor. to said secs.

Thence,

From the true point for sec. cor.

S.  $89^{\circ}56'$  W., on true line bet. secs. 26 and 35.

Ascend abruptly over broken E. slope of top of spur, through scattered timber and undergrowth.

39.79 On surfacerock on top of spur, mark a cross (X), over which:

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in a

Subdivision, T. 21 S., R. 15 W.

Chains

mound of stone, for 1/4 sec. cor., with brass cap marked

826

1/4  
835

1925

No other suitable accessories available.

48.00 Leave top of spur, 1070 ft. above the true point for  
cor. secs. 25, 26, 35 and 36, projects E. from the NW.;  
descend abruptly over broken SW. slope.

72.00 Ravine, 340 ft. below spur, drains SE.; ascend abrupt  
NE. slope.

79.58 The cor. secs. 26, 27, 34 and 35, 120 ft. above ravine.  
Land, broken and mountainous with a general easterly  
exposure and drainage.

Soil, shallow, rocky, clay and sand loam; 3rd rate.

Undergrowth, scattered shadscale, mountain rush, yellow  
top, scrub mahogany, sage and black brush.

Timber, scattered scrub juniper and pinin.

Fair grazing.

N. 0°01' W., bet. secs. 26 and 27.

Ascend abrupt SW. slope of broken mountainous land  
through scattered timber and undergrowth.

17.20 Rocky spur, 360 ft. above cor., projects SE.; descend  
abrupt NE. slope of spur.

32.00 Ravine, 220 ft. below spur, drains E.; ascend abrupt S.  
slope of spur.

40.00 On abrupt S. slope of surfacerock, mark a cross (X),  
over which:

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in  
amount of stone, for 1/4 sec. cor., with brass cap  
marked.

1/4

827 | 826

1925

From which,

Subdivision, T. 21 S., R. 15 W.

A juniper, 10 ins. diam., bears S. 58°30' E., 64 lks. dist., marked  $\frac{1}{4}$  S26 BT.

A pinon, 8 ins. diam., bears N. 46°30' W., 84 lks. dist., marked  $\frac{1}{4}$  S27 BT.

45.20 Rocky spur, 340 ft. above ravine, projects E.; descend about N. slope over ledges.

40.00 True point for the cor. secs. 22, 23, 26 and 27, falls in bottom of ravine, 1260 ft. below spur, drains S. 80° E., where it is impossible to set a permanent cor.

30.43 On N. side of bottom of ravine. Set an iron post, 3 ft. long, 2 ins. diam., 6 ins. in the ground to bedrock and 24 ins. in a mound of stone, for witness cor. to the cor. secs. 22, 23, 26 and 27, with brass cap marked.

T21S	R15W
S22	S23
S27	S26
WC	
1925	

From which,  
 A point on face of ledge, marked WC X 80 S23; bears S. 10° E., 7 lks. dist.


No other suitable accessories available.  
 Land, broken and mountainous with a general southerly and northerly exposure and drainage.  
 Soil, shallow, rocky, clay, sand, and loam; 3rd rate.  
 Undergrowth, scattered shadescale; mountain rish, yellow top, sanovany, sage, and buck brush.  
 Timber, scattered scrub juniper and pinin.  
 Fair grazing.

From the true point for the cor. secs. 22, 23, 26 and 27, which is S. 0°01' E., 48 lks. dist. from the witness cor. to said secs.

S. 89°50' E., on random line bet. secs. 23 and 26.

Subdivision, T. 21 S., R. 15 W.

- 40.00 Set temp.  $\frac{1}{4}$  sec. cor.
- 79.60 Intersect the N. and S. line, 19 lks. N. of the cor.  
secs. 23, 24, 25 and 26.  
Thence, N.  $89^{\circ}56' W.$ , on true line bet. secs. 23 and 26.  
Ascend gradually over broken S. slope of spur through scattered timber and undergrowth.
- 39.80 On broken S. slope, 250 ft. above sec. cor.  
Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground to bedrock and 12 ins. in a mound of stone, for  $\frac{1}{4}$  sec. cor., with brass cap marked.



1925

From which,

- A juniper, 6 ins. diam., bears S.  $68^{\circ}30' W.$ , 54 lks. dist., marked  $\frac{1}{4}$  S26 BT.
- A juniper, 6 ins. diam., bears N.  $81^{\circ} W.$ , 87 lks. dist., marked  $\frac{1}{4}$  S23 BT.


- 65.80 Ravine, drains S.  $80^{\circ} E.$ , continue ascent.
- 70.00 Point of spur, projects N.  $20^{\circ} E.$ , .5.00 chs. dist.
- 78.80 Same ravine as last, drains N.  $60^{\circ} E.$
- 79.60 The true point for the cor. secs. 22, 23, 26 and 27, 500 ft. above the  $\frac{1}{4}$  sec. cor.  
Land, broken and mountainous with a general easterly exposure and drainage.  
Soil, shallow, loose, sand, clay, and rock; 3rd rate.  
Undergrowth, scattered shadscale, mountain rush, yellow top, mahogany, black, and sage brush.  
Timber, scattered scrub juniper and pinon.

---

N.  $0^{\circ}01' W.$ , bet. secs. 22 and 23, from the true point for the cor. secs. 22, 23, 26 and 27 which is S.  $0^{\circ}01' E.$ , 48 lks. dist. from the witness cor. to said secs.  
Ascend abruptly over broken W. slope of spur through


Observations on the ...

scattered undergrowth and ...  
 The witness ... to the cor. ...  
 31.40 Spur, 320 ft. above the true point for section ...  
 projects SE.; descend abrupt NE. slope.  
 40.00 On broken NE. slope, 150 ft. below spur ...  
 Set an iron post, .3 ft. long, 1 in. diam., 10 in. in  
 ground to bedrock and 20 in. in a mound of stone, for  
 1<sup>st</sup> sec. cor., with brass cap marked ... 08.25



From which,  
 A pinon, 10 ins. diam., bears N. 65° E., 72 lks.  
 dist., marked † 823 BT.  
 A pinon, 12 ins. diam., bears N. 32° W., 50 lks.  
 dist., marked † 822 BT.

44.20 Ravine, 120 ft. below the 1<sup>st</sup> sec. cor., drains SE.;  
 ascend abrupt SW. slope.  
 47.50 Spur, 320 ft. above ravine, projects SE.; descend  
 gradual NE. slope.  
 78.00 Ravine, 80 ft. below spur, drains SE.; ascend abrupt  
 W. slope.  
 80.00 On abrupt W. slope, 120 ft. above ravine:  
 Set an iron post, .3 ft. long, 2 in. diam., 27 in. in  
 the ground, for cor. sec. 14, 15, 22 and 23, with  
 brass cap marked.

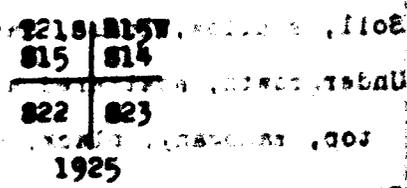

From which,  
 A juniper, 8 ins. diam., bears N. 55° E., 110 lks.  
 dist., marked BT. free tree scrubby for other  
 A juniper, 8 ins. diam., bears S. 55° E., 107 lks.  
 dist., marked BT. free tree scrubby for other  
 A pinon, 8 ins. diam., bears S. 77° E., 107 lks.

Subdivision T. 21 S. R. 15 W.

Chains.

A juniper, 10 ins. diam., bears N. 32° W. 380 lks. dist., marked BT. Tree too scrubby for other marks.

Land, broken and mountainous, with a general southeasterly exposure and drainage.

Soil, shallow, loose, sand, clay, and rock; 3d rate.


Undergrowth, scattered shadscale, mountain rush, yellow top, mahogany, black, and sage brush.

Timber, scattered scrub juniper and pinon.

Fair grazing.

27.11

S. 89° 56' E. on random line bet. secs. 14 and 23, Inaccessible face of ledges makes chaining impracticable. I therefore triangulate as follows: Erect flag "A" at this point and flag "B" on line to the E. From flag "A" measure base line AC N. 29° 49' W. 3.00 chs. from which point flags "A" "B" subtend an angle of 49°

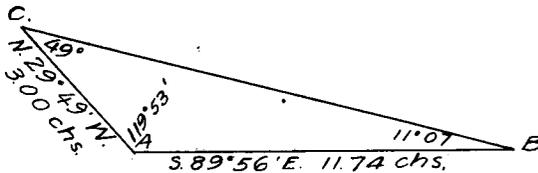

Distance on line	27.11 chs.
Distance by triangulation	11.74 chs.
	<hr/>
	38.85 chs.

38.85

To point "B" of triangulation. Set temp. witness cor. to the  $\frac{1}{4}$  sec. cor.

79.56

Intersect the N. and S. line, 12 lks. S. of the cor. of secs. 13, 14, 23, and 24. Thence

S. 89° 59' W. on true line bet. secs. 14 and 23,

Ascend abruptly over broken S. slope of mountainous land; through scattered undergrowth and timber.

39.78

True point for the  $\frac{1}{4}$  sec. cor. falls on sloping face of ledge, where it is impracticable to set a permanent corner.

## Subdivision T, 21 S. R. 15 W.

Chains.  
40.71

On E. slope, 700 ft. above section corner,  
Set an iron post 3 ft. long, 1 in. diam., 10 ins. in the  
ground to bed-rock and 20 ins. in a mound of stone,  
for witness corner to the  $\frac{1}{4}$  sec. cor., with brass cap  
marked

$\frac{1}{4}$  S14 WC  
S23  
1925

Deposit a limestone 6 x 6 x 4 ins. at base of post  
marked with a cross (X).

No other suitable accessories available.

Thence by triangulation over broken E. face of ledges.

52.45 Top of spur, 440 ft. above the witness corner to the  $\frac{1}{4}$   
section corner, projects S. 30° E.; descend abruptly  
over broken SW. slope.

65.40 Ravine, 300 ft. below spur, drains S. 20° E.; ascend  
abrupt NE. slope.

71.00 Spur, 60 ft. above ravine, projects S. 10° E.; descend  
abrupt W. slope.

79.55 The cor. of secs. 14, 15, 22, and 23.

Land, broken and mountainous, with general southeasterly  
exposure and drainage.

Soil, shallow, rocky, clay, sand, and rock; 3d rate.

Undergrowth, scattered shadscale, mountain rush, yellow  
top, mahogany, black, and sage brush.

Timber, scattered scrub juniper and pinon.

Fair grazing.

N. 9° 01' W. bet. secs. 14 and 15,

Ascend abrupt S. slope of broken mountainous land;  
through scattered undergrowth and timber.

15.00 Ridge, 380 ft. above corner, bears E. and W.; descend  
abrupt N. slope of ridge.


27.90 Ravine, 240 ft. below ridge, drains N. 30° E.; thence  
over broken E. slope.

Subdivision, T. 21 S., R. 15 W.

66. The true point for the  $\frac{1}{4}$  sec. cor. will fall on the inaccessible S. breaks of deep canyon, therefore at this point on surface rock at top of S. breaks of canyon, mark a cross (X), over which:

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in a mound of stone, for witness cor. to the  $\frac{1}{4}$  sec. cor.

secs. 14 and 15, with brass cap marked.



From which,


A juniper, 18 ins. diam., bears S. 50° E., 84 lks.

dist., marked WC  $\frac{1}{4}$  S14 BT.

A pinon, 12 ins. diam., bears S. 5° W., 84 lks.

dist., marked WC  $\frac{1}{4}$  S15 BT.

The line to the N. of this point, passes over the inaccessible breaks of canyon over which I am unable to chain, I therefore triangulate as follows. Erect flag "A" at this point and flag "B" on line to the N. From flag "B", measure base line "BC", West, 30.10 chs. dist., from which point, flags "AB" subtend an angle of 55°05'.

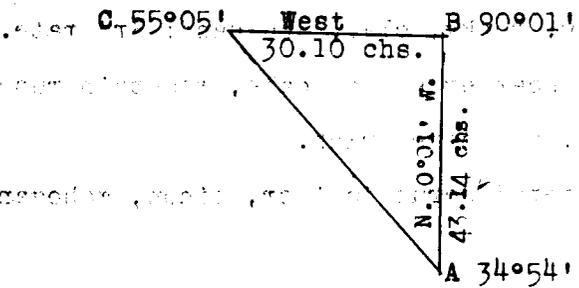

Distance on line	36.86 chs.
Distance by triangulation	43.14 chs.
	30.00 chs.

59.00 Approximate distance; bottom of canyon, 750 ft. deep,

essentially drains E.; ascend abruptly over inaccessible N. breaks of canyon.

72.00 Approximate distance; spur, 800 ft. above bottom of

canyon, projects S. 30° E.

80.00 To point "B" of triangulation; As the true point for the

Subdivision, T. 21 S., R. 15 W.

Chains

cor. secs. 10, 11, 14 and 15 falls on broken face of ledge where it is impracticable to set a permanent cor. therefore, at a point N. 89°58' E., 30 lks. dist. from true cor. point, which is on line bet. secs. 11 and 14. Set an iron post, 3 ft. long, 2 ins. diam., 1 1/2 ins. in the ground to bedrock and 16 ins. in a mound of stone, for witness cor. to the cor. secs. 10, 11, 14 and 15, with brass cap marked.

T21S	R15W
S10	S11
S15	S14

1925

From which,

- A pinon, 10 ins. diam., bears N. 3° E., 109 lks. dist., marked WC T21S R15W S11 BT.
- A pinon, 14 ins. diam., bears S. 17°45' W., 46 lks. dist., marked WC T21S R15W S14 BT.
- A pinon, 16 ins. diam., bears S. 32°30' W., 57 lks. dist., marked WC T21S R15W S15 BT.
- A pinon, 20 ins. diam., bears E. 55° W., 38 lks. dist., marked WC T21S R15W S10 BT.

Land, broken and mountainous with a general easterly exposure and drainage.

Soil, shallow, rocky, clay, and sand; 3rd rate.

Undergrowth, scattered shadscale, mountain rush, yellow top, black, and sage brush.

Timber, scattered scrub juniper, pinon, mahogany, and balsam.


Fair grazing.

N. 89°59' E., on random line bet. secs. 11 and 14, from the true point for the cor. secs. 10, 11, 14, and 15, which is S. 89°58' W., 30 lks. dist. from the witness cor. to said secs.

30.10 Set temp. witness cor. to the 4 sec. cor. from this point ledges make chaining impracticable, I therefore triangulate as follows.

Subdivision, T. 21, S., R. 15 W.

Erect flag "A" at this point and flag "B" on line to the  
 From flag "B", measure base line "BC", S. 0°01' E.,  
 40.00 chs. dist., from which point, flags "AB" subtend  
 an angle of 51°03'.

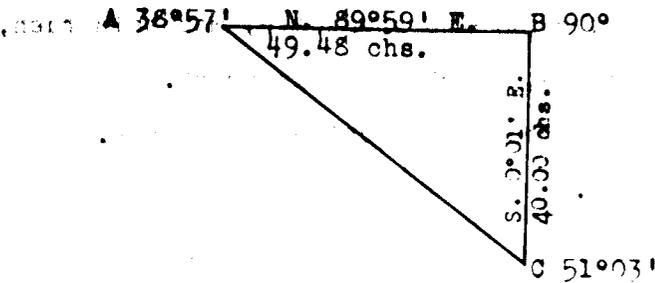

Distance on line	30.10 chs.
Distance by triangulation	49.48 chs.
	<u>79.58 chs.</u>

79.58 To point "B" of triangulation at a point 3 lks. S. of the  
 cor. sec. 11, 12, 13 and 14.


Thence,

S. 89°58' W., on true line bet. secs. 11 and 14, by  
 triangulation over inaccessible S. breaks of ledges  
 through scattered timber and undergrowth.

39.79 True point for the  $\frac{1}{4}$  sec. cor. falls in inaccessible  
 ledges.

49.48 To point "A" of triangulation point, on surface rock mark  
 a cross (X), over which:

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in  
 a mound of stone, for witness cor. to the  $\frac{1}{4}$  sec. cor.  
 secs. 11 and 14, with brass cap maked.



1925.

No other suitable accessories available.

Thence by chaining.

57.30 Spur, 650 ft. above cor. secs. 11, 12, 13 and 14,  
 projects S. 20° E.; descend abrupt SW. slope of spur.

77.40 Ravine, 170 ft. below spur, drains S. 30° E.; ascend.  
 abrupt NE. slope.

79.25 The witness cor. to the cor. secs. 10, 11, 14 and 15.

79.58 The true point for the cor. secs. 10, 11, 14 and 15,

Subdivision, T. 21. S., R. 25 W.

Chains

65 ft. above ravine

Land, broken and mountainous with a general southeasterly exposure and drainage.

Soil, shallow, rocky, clay, and sand; 3rd rate.

Undergrowth, scattered shadscale, mountain rush, yellow top, mahogany, black and sage brush.

Timber, scattered scrub juniper and pinon.

Fair grazing.

From the true point for the cor. secs. 10, 11, 14 and 15 which is S. 89° 58' W., 30 lks. dist. from the witness cor. to said secs.

N. 0° 01' W., bet. secs. 10 and 11.


Ascend gradually over broken SE. slope of mountainous land through scattered timber and undergrowth.

16.00 Head of ravine, drains S. 10° E.

19.50 Spur, 250 ft. above cor., point, projects SE.; descend abrupt W. slope of spur projecting N.

40.00 On abrupt W. slope.

Set an iron post, 3 ft. long, 1 in. diam., 15 ins. in the ground, to bedrock and 15 ins. in a mound of stone, for 1/4 sec. cor., with brass cap marked.



From which,

A pinon, 8 ins. diam., bears N. 54° E., 29 lks. dist., marked 1/4 S11 BT.

A juniper, 6 ins. diam., bears N. 82° 30' W., 33 lks. dist., marked 1/4 S10 BT.

46.00 Rocky spur, projects N. 30° W.; continue descent.

66.00 Ravine, 1050 below spur, at 19.50 chs. point, drains NE ascend gradual SE. slope.

80.00 On broken SE. slope, 100 ft. above ravine

Set an iron post, 3 ft. long, 2 ins. diam., 10 ins. in

## Subdivision, T. 21 S., R. 15 W.

Chains

ground to bedrock and 20 ins. in a mound of stone,  
for cor. secs. 2, 3, 10 and 11, with brass cap marked.

T21S	R15W
S3	S2
S10	S11

1925

From which,

A pinon, 10 ins. diam., bears N. 89° E., 26 lks.  
dist., marked T21S R15W S2 BT.

A pinon, 12 ins. diam., bears S. 25° E., 13 lks.  
dist., marked T21S R15W S11 BT.

A point on face of ledge, marked X 30 S10, bears  
S. 68°30' W., 14 lks. dist.

A pinon, 12 ins. diam., bears N. 25° W., 14 lks.  
dist., marked BT. Tree too scrubby for other marks.

Land, broken and mountainous with a general westerly and  
northeasterly exposure and drainage.

Soil, shallow, rocky, clay, and sand loam; 3rd rate.

Undergrowth, scattered snagscale, mountain rush, yellow  
top, black, and sage brush.

Timber, scattered juniper, pinon, and spruce.

Fair grazing.

N. 89°58' E., on random line bet. secs. 2 and 11.

33.92 Set temp. witness cor. to the  $\frac{1}{4}$  sec. cor.

79.61 Intersect the N. and S. line, 30 lks. N. of the cor.  
secs. 1, 2, 11 and 12.

Thence,

N. 89°49' W., on true line, bet. secs. 2 and 11.

Ascend abruptly over broken NE. slope of mountainous  
land through scattered undergrowth and timber.

27.60 Spur, 880 ft. above cor., projects N. 20° E.; descend  
abrupt W. slope over ledges.

39.805 True point for the  $\frac{1}{4}$  sec. cor. falls on inaccessible  
face of ledge.

45.67 In broken ledges.

## Subdivision, T. 21 S., R. 15 W.

## Chains

Set an iron post, 3 ft. long, 1 in. diam., 15 ins. in the ground to bedrock and 15 ins. in a mound of stone, for witness cor. to the  $\frac{1}{4}$  sec. cor., secs. 2 and 11, with brass cap marked.

$\frac{1}{4}$   $\frac{S2}{S11}$  WC

1925

From which,

A pinon, 12 ins. diam., bears S.  $45^{\circ}$  E., 67 lks. dist., marked WC  $\frac{1}{4}$  S11 BT.

No other suitable bearing trees available.

67.30 Ravine; 1070 ft. below spur, drains N.  $30^{\circ}$  E.; ascend abrupt SE. slope.

79.61 The cor. secs. 2, 3, 10 and 11, 740 ft. above ravine. Land, broken and mountainous with a general northeasterly exposure and drainage.

Soil, shallow, rocky, clay, and sand loam; 3rd rate.

Undergrowth, scattered shadscale, mountain rush, yellow top, sage, and black brush.

Timber, scattered pinon, juniper, and balsam.

Fair grazing.

N.  $0^{\circ}01'$  W., on true line bet. secs. 2 and 3.

Ascend gradually over broken S. slope of mountainous land through scattered timber and undergrowth.

2.80 Sour, 40 ft. above cor., projects E., 12.00 chs. dist.; descend abrupt N. slope.

13.30 Ravine, 160 ft. below spur, drains E.; ascend abrupt S. slope of sour.

29.20 Spur, 410 ft. above ravine, projects N.  $50^{\circ}$  E.; descend abrupt NW. slope of spur.

40.00 On rocky N. slope of surfacerock, mark a cross (X), over which:

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in a mound of stone, for  $\frac{1}{4}$  sec. cor., with brass cap marked.



Subdivision, T. 21 S., R. 15 W.

Chains


From the cor. secs. 3, 4, 33 and 34, on the S. bdy. of the township, which is an iron post, 2 ins. diam., with brass cap, set, marked and witnessed as described in the finished notes of the survey T. 22 S., R. 15 W. N. 0°02' W., bet. secs. 33 and 34.

Ascend gradually along broken E. slope of spur through scattered undergrowth and timber.

25.00 Spur, 70 ft. above cor., projects S. 30° W.; continue ascent along broken W. slope of spur.

40.00 On broken W. slope of spur.

Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground to bedrock and 10 ins. in a mound of stone, for S. sec. cor., with brass cap marked.



From which,

A pinon, 3 ins. diam., bears S. 62° E., 39 lks. dist., marked  $\frac{1}{2}$  S34 BT.

A pinon, 3 ins. diam., bears N. 88° W., 32 lks. dist., marked  $\frac{1}{2}$  S33 BT.


41.00 Top of same spur as last, 400 ft. above sec. cor., projects SE.; descend abrupt NE. slope.

54.00 Ravine, 100 ft. below spur, drains S. 60° E.; heads about 5.00 chs. S. 60° W.; ascend gradual SE. slope.

60.50 Same spur as last, projects SW.; 50 ft. above ravine; descend gradual NW. slope.

69.00 On broken NW. slope, 220 ft. below spur.

Set an iron post, 3 ft. long, 2 ins. diam., 20 ins. in the ground to bedrock and 10 ins. in a mound of stone, for cor. secs. 27, 28, 33 and 34, with brass cap marked



From which,

Subdivision, T. 21 S., R. 15 W.

A pinon, 20 ins. diam., bears N. 41° E., 45 lks.

dist., marked T21S R15W S27 BT.

A pinon, 16, ins. diam., bears S. 34°15' E., 58 lks.

dist., marked T21S R15W S34 BT.

A pinon, 10 ins. diam., bears S. 40°30' W., 67 lks.

dist., marked T21S R15W S33 BT.

A pinon, 10 ins. diam., bears N. 28° W., 98 lks.

dist., marked T21S R15W S28 BT.

Land, broken and mountainous with a general easterly and westerly exposure and drainage.

Soil, shallow, rocky, sand, clay and loam; 3rd rate.

Undergrowth, scattered shadscale, mountain rush, yellow top, sage and black brush.

Timber, scattered juniper and pinon.

Fair grazing.

East, on random line bet. secs. 27 and 34.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

79.98 Intersect the N. and S. line, 5 lks. S. of the cor. secs. 26, 27, 34 and 35.

Thence,

S. 89°58' W., on true line bet. secs. 27 and 34.

Descend gradually over broken SW. slope of mountainous land through scattered timber and undergrowth.

4.00 Spur, projects S. 60° E.; continue descent.

27.70 Ravine, 160 ft. below cor., drains SE.; ascend abrupt NE. slope.

39.99 On abrupt N. slope.

Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground to bedrock and 10 ins. in a mound of stone, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

$\frac{1}{4}$   $\frac{S27}{S34}$

1925

## Subdivision, T. 21, S., R. 15 W.

## Chains

From which,

A pinon, 6 ins. diam., bears S.  $41^{\circ}30'$  E., 27 lks.  
dist., marked  $\frac{1}{2}$  834 BT.

A pinon, 12 ins. diam., bears N.  $71^{\circ}30'$  W., 28 lks.  
dist., marked  $\frac{1}{2}$  827 BT.

51.50 Spur, 350 ft. above ravine, projects SE.; descend  
gradual SW. slope of spur.

52.50 Ravine, 50 ft. below spur, drains SE.; ascend gradual  
NE. slope of ridge.

53.10 Ridge, 30 ft. above ravine, bears N.  $10^{\circ}$  W. and S.  $20^{\circ}$  E.  
descend abrupt W. slope of ridge.

54.00 The cor. secs. 22, 23, 33 and 34, 290 ft. below ridge.

Land, broken and mountainous with a general southeasterly  
exposure and drainage.

Soil, shallow, rocky, rock, clay, and sand; 3rd rate.

Undergrowth, scattered shedscale, mountain rush, yellow  
top, sage, and black brush.

Timber, scattered juniper and pinon.

Fair grazing.

N.  $2^{\circ}30'$  W., bet. secs. 27 and 28.

Ascend gradually over broken SW. slope of mountainous  
land through scattered timber and undergrowth.

55.00 Ridge, 240 ft. above cor., bears NW. and E.; descend  
gradual NE. slope of ridge.

56.00 In draw, 240 ft. below ridge, drains N.  $20^{\circ}$  E.

Set an iron post, 3 ft. long, 1 in. diam., 15 ins. in the  
ground to bedrock and 15 ins. in a mound of stone,  
for  $\frac{1}{2}$  sec. cor., with brass cap marked.

$\frac{1}{2}$   
828 | 827

1925

From which,

A pinon, 6 ins. diam., bears S.  $22^{\circ}15'$  E., 32 lks.  
dist., marked  $\frac{1}{2}$  827 BT.

## Subdivision, T. 21 S., R. 15 W.

A pinon, 12 ins. diam., bears N.  $32^{\circ}15'$  W., 127 lks. dist., marked  $\frac{1}{4}$  S28 BT.

50.00 On broken land.

Set an iron post, 3 ft. long, 2 ins. diam., 12 ins. in the ground to bedrock and 18 ins. in a mound of stone, for cor. secs. 21, 22, 27 and 28, with brass cap marked.

T21S	R15W
S21	S22
S23	S27

1924

From which,

A pinon, 6 ins. diam., bears N.  $1^{\circ}45'$  E., 137 lks. dist., marked T21S R15W S22 BT.

A pinon, 5 ins. diam., bears S.  $56^{\circ}45'$  E., 17 lks. dist., marked BT. Tree too scrubby for other marks.

A pinon, 10 ins. diam., bears S.  $2^{\circ}30'$  W., 180 lks. dist., marked T21S R15W S23 BT.

A juniper, 6 ins. diam., bears N.  $39^{\circ}45'$  W., 90 lks. dist., marked BT. Tree too scrubby for other marks.

Land, broken and mountainous with a general northeasterly exposure and drainage.

Soil, shallow, rocky, clay, and sand; 3rd ran.

Undergrowth, scattered shrubscare, mountain rush, yellow top, black and sage brush.

Timber, scattered juniper and pinon.

Fair grazing:

N.  $89^{\circ}58'$  E., on random line bet. secs. 22 and 27.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

50.00 Intersect the N. and S. line, 9 lks. S. of the true point for the cor. secs. 22, 23, 26 and 27, which is S.  $0^{\circ}01'$  E., 48 lks. dist.; from the witness cor. to said secs.

Thence, from the true point for cor.

S.  $89^{\circ}54'$  W., on true line bet. secs. 22 and 27.

Ascend abruptly over broken SE. slope of point of spur

## Subdivision, T. 21 S., R. 15 W.

## Chains

- 2.40 The S. point of rocky ledge; continue ascent.<sup>A</sup>
- 3.40 Ravine, 130 ft. deep, drains SE.
- 40.00 On broken N. slope, 570 ft. above the true point for  
sec. cor.  
Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the  
ground to bedrock and 10 ins. in a mound of stone, for  
 $\frac{1}{4}$  sec. cor., with brass cap marked.
- $\frac{1}{4}$   $\frac{S22}{S27}$   
1925
- From which,
- A juniper, 6 ins. diam., bears S. 80° W., 353 lks.  
dist., marked  $\frac{1}{4}$  S27 BT.
- A pinon, 6 ins. diam., bears N. 71° W., 210 lks.  
dist., marked  $\frac{1}{4}$  S22 BT.
- 70.50 Ravine, 120 ft. deep, drains N. 30° E., 4.30 chs. dist.  
to junction with ravine from the W.
- 80.00 The cor. secs. 21, 22, 27 and 28, 50 ft. above the  $\frac{1}{4}$  sec.  
cor.  
Land, broken and mountainous with a general northerly  
exposure and drainage.  
Soil, shallow, loose, rock, sand, and clay; 3rd rate.  
Undergrowth, scattered shadscale, mountain rush, yellow  
top, black and sage brush.  
Timber, scattered pinon and juniper.  
Fair grazing.
- 
- N. 0°02' W., bet. secs. 21 and 22.  
Descend gradually over broken N. slope of mountainous  
land through scattered timber and undergrowth.
- 6.00 Ravine, 50 ft. below cor., drains E.; ascend gradual  
S. slope.
- 15.80 Spur, 60 ft. above ravine, projects E., 15.00 chs. dist.;  
descend gradual N. slope.
- 31.60 Ravine, 100 ft. below spur, drains Southeastern  
to junction with ravine from the W.


Subdivision, T. 21 S., R. 15 W.

Chains

wolfe ascend gradual S. slope.

40.00 On gradual S. slope, 50 ft. above ravine.

Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground to bedrock and 20 ins. in a mound of stone, for  $\frac{1}{4}$  sec. cor., with brass cap marked.




From which,

A pinon, 10 ins. diam., bears N. 73° E., 80 lks. dist., marked  $\frac{1}{4}$  S22 BT.

A pinon, 10 ins. diam., bears N. 72°30' W., 59 lks. dist., marked  $\frac{1}{4}$  S21 BT.

80.00 At head of ravine, 500 ft. above the  $\frac{1}{4}$  sec. cor., drains S. 20° W.

Set an iron post, 3 ft. long, 2 ins. diam., 15 ins. in the ground to bedrock and 15 ins. in a mound of stone, for cor. secs. 15, 16, 21 and 22, with brass cap marked.



From which,

A pinon, 8 ins. diam., bears S. 40°45' E., 150 lks. dist., marked T21S R15W S22 BT.

A pinon, 6 ins. diam., bears S. 16°30' W., 421 lks. dist., marked T21S R15W S21 BT.

A juniper, 3 ins. diam., bears N. 78°45' W., 547 lks. dist., marked BT.

No NE. bearing tree available.

Deposit a limestone, 5 x 3 x 2 ins., at base of post, marked with a cross (X).

Land, broken and mountainous with a general southeasterly exposure and drainage.

Soil, shallow, rocky, clay and sand loam; 3rd rate.

Subdivision, T. 21 S., R. 15 W.

Chains

anisho

Undergrowth, scattered shadscale, mountain rush, yellow top, black and sage brush.

Timber, scattered juniper and pinon.

Fair grazing.

N. 89°54' E., on random line bet. secs. 15 and 22.

40.00 Set tempo. 1/4 sec. cor.

79.88 Intersect the N. and S. line, 5 lks. N. of the cor. secs 14, 15, 22 and 23.

Thence,

S. 89°56' W., on true line bet. secs. 15 and 22.

Descend abruptly over broken SW. slope of mountainous land through scattered undergrowth and timber.

3.10 Ravine, 80 ft. below cor., drains S. for 6.00 chs. dist. thence SE.; ascend abrupt NE. slope.

36.50 Spur, 350 ft. above ravine, projects S. 20° E.; descend gradual SW. slope.

39.94 On broken SW. slope.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/4 sec. cor., with brass cap marked.

1/4 S15  
S22

1925

From which,

A pinon, 10 ins. diam., bears N. 55° E., 87 lks. dist., marked 1/4 S15 BT.

A pinon, 8 ins. diam., bears S. 48° W., 53 lks. dist., marked 1/4 S22 BT.

42.70 Head of ravine, 40 ft. below spur, drains S.; ascend gradual E. slope.

62.50 Spur, 90 ft. above ravine, projects S.; descend gradual W. slope.

79.88 The cor. secs. 15, 16, 21 and 22, 180 ft. below spur. Land, broken and mountainous with a general southeasterly exposure and drainage.

Subdivision, T. 21<sup>st</sup> S., R. 15 W.

Chain

Soil, shallow, rocky, clay and sand loam; 3rd rate.

Undergrowth, scattered shadscale, mountain rush, yellow top and sagebrush.

Timber, scattered juniper and pinon.

Fair grazing.

N. 0°02' W., bet. secs. 15 and 16.

Ascend abruptly over broken S. slope of mountainous land through scattered undergrowth and timber.

9.90 Spur, 180 ft. above cor., projects E.; descend abrupt N. slope of spur.

39.00 Ravine, 370 ft. below spur, drains NE.; ascend gradual S. slope.

40.00 On gradual S. slope.

Set an iron post, 3 ft. long, 1 in. diam., 15 ins. in the ground to bedrock and 15 ins. in a mound of stone, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

$\frac{1}{4}$   
 S16 | S15  
 1925

From which,

A pinon, 18 ins. diam., bears S. 55° E., 39 lks. dist., marked  $\frac{1}{4}$  S15 BT.

A juniper, 12 ins. diam., bears N. 72° W., 86 lks. dist., marked  $\frac{1}{4}$  S16 BT.

50.00 Spur, 60 ft. above ravine, projects NE.; descend gradual NW. slope.

70.50 Ravine, 150 ft. below spur, drains E.; ascend gradual S. slope.

80.00 On broken S. slope, 110 ft. above ravine.

Set an iron post, 3 ft. long, 2 ins. diam., 12 ins. in the ground to bedrock and 18 ins. in a mound of stone, for cor. secs. 9, 10, 15 and 16, with brass cap marked

## Subdivision, T. 21 S., R. 15 W.

Chains

511500

T21S	R15W
S9	S10
S16	S15

1925

From which,

A pinon, 12 ins. diam., bears N.  $32^{\circ}30'$  E., 98 lks. dist., marked T21S R15W S10 BT.

A juniper, 12 ins. diam., bears S.  $75^{\circ}$  E., 100 lks. dist., marked T21S R15W S15 BT.

A juniper, 18 ins. diam., bears S.  $63^{\circ}15'$  W., 137 lks. dist., marked T21S R15W S16 BT.

A pinon, 12 ins. diam., bears N.  $74^{\circ}30'$  W., 93 lks. dist., marked T21S R15W S9 BT.

Land, broken and mountainous with a general easterly exposure and drainage.

Soil, shallow, loose, rocky, clay and sand loam; 3rd rate

Undergrowth, scattered shadscale, mountain rush, yellow top, sage, and black brush.

Timber, scattered juniper and pinion.

Fair grazing.

N.  $89^{\circ}56'$  E., on random line bet. secs. 10 and 15.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

79.80 Intersect the N. and S. line, 5 lks. N. of the true point for the cor. secs. 10, 11, 14 and 15, which is S.  $89^{\circ}53'$  W., 30 lks. dist. from the witness cor. to the cor. said secs.

hence from the true point for cor.

S.  $89^{\circ}53'$  W., on true line bet. secs. 10 and 15.

Ascend abrupt S. slope of broken mountainous land through scattered undergrowth and timber.

4.50 Spur, 170 ft. above cor. point, projects S.  $20^{\circ}$  E.; descend abrupt W. slope of spur.

19.60 Ravine, 280 ft. below spur, drains S. and heads about 10.00 chs. to the W.

30.10 Spur, 180 ft. above ravine, projects S.; descend abrupt

## Subdivision, T. 21 S., R. 15 W.

## Chains

39.90

On broken N. slope

Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground to bedrock and 18 ins. in a mound of stone, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

S10

S15

1925

From which,

A pinon, 8 ins. diam., bears N.  $34^{\circ}$  E., 24 lks.

dist., marked  $\frac{1}{4}$  S10 BT.

A pinon, 6 ins. diam., bears S.  $39^{\circ}$  W., 90 lks.

dist., marked  $\frac{1}{4}$  S15 BT.

40.50

Ravine, 240 ft. below spur, drains S.  $20^{\circ}$  W.; ascend

gradual E. slope.

44.40

Rocky spur, 150 ft. above ravine, projects S., 5.00 chs.

dist.; descend gradual W. slope.

51.20

Ravine, 100 ft. below spur, drains S.; heads 10.00 chs.

to the N.; ascend gradual E. slope.

79.80

The cor. secs. 9, 10, 15 and 16, 170 ft. above ravine.

Land, broken and mountainous, with a general southerly exposure and drainage.

Soil, shallow, rocky, clay, and sand; 3rd rate.

Undergrowth, scattered shadscale, mountain rush, yellow top, sage, and black brush.

Timber, scattered juniper and pinon.

Fair grazing.

N.  $0^{\circ}02'$  W., bet. secs. 9 and 10.

Ascend gradual S. slope of broken mountainous land through scattered timber and undergrowth.

21.10

Ridge, 100 ft. above cor., bears E. and W.; descend

abrupt N. slope of ridge.

40.00

On abrupt, broken N. slope of ridge.

Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in


the ground to bedrock and 18 ins. in a mound of stone,

Subdivision, T. 21 S., R. 15 W.

BR15W

Chains

for  $\frac{1}{4}$  sec. cor., with brass cap marked.



From which,

A pinon, 10 ins. diam., bears S. 43° E., 10 lks. dist. marked  $\frac{1}{4}$  S10 BT.

A red cedar, 8 ins. diam., bears N. 59° W., 15 lks. dist., marked  $\frac{1}{4}$  S9 BT.

40.60 Ravine, 250 ft. below ridge, drains E.; ascend abrupt S. slope.

51.00 Sour, 100 ft. above ravine, projects N. 80° E., descend abrupt N. slope.

30.00 In bottom of ravine, 450 ft. below sour, drains N. 30° W. Set an iron post, 3 ft. long, .2 ins. diam., 27 ins. in the ground, for cor. secs. 3, 4, 9 and 10, with brass cap marked.

T21S	R15W
S4	S3
S9	S10

1925

From which,

A pinon, 8 ins. diam., bears N. 45° 30' E., 310 lks. dist., marked T21S R15W S3 BT.

A pinon, 8 ins. diam., bears S. 55° 45' E., 290 lks. dist., marked T21S R15W S10 BT.

A pinon, 10 ins. diam., bears S. 11° 30' W., 199 lks. dist., marked T21S R15W S9 BT.

A pinon, 8 ins. diam., bears N. 87° 15' W., 242 lks. dist., marked T21S R15W S4 BT.

Land, broken and mountainous with a general easterly exposure and drainage.

Soil, shallow, rocky, clay and sand; 3rd rate.

Undergrowth, scattered shadeless mountain brush, yellow top and black brush.

Timber, scattered juniper, pinon, and red cedar.

Subdivision, T. 21. S., R. 15. W.

79.78 Intersect the N. and S. line, 2 1/2 blks. S. of the cor. secs. 2, 3, 10 and 11.

Thence,

S. 89°49' W., on true line bet. secs. 3 and 10.

Ascend abruptly over broken E. slope of mountainous land through scattered timber and undergrowth.

10.00 Enter broken top of spur which projects N. 80° E. from the W.; thence along top of spur.

39.00 Short spur from main spur, 840 ft. above sec. cor., projects N.; leave top of main spur, projects E. from the SW.; descend gradually over broken NW. slope.

39.89 On broken W. slope of surfacerock, mark a cross (X), over which:

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in a mound of stone, for 1/4 sec. cor., with brass cap marked:

S3
—
S10

1925

From which,

A pinon, 6 ins. diam., bears N. 26°45' E., 69 lks. dist., marked 1/4 S3 BT.

A pinon, 12 ins. diam., bears S. 48°30' W., 109 lks. dist., marked 1/4 S10 BT.

45.20 Head of ravine, 80 ft. below spur, drains N. 30° E.; ascend gradual S<sup>4</sup>. slope.

55.30 Spur, 30 ft. above head of ravine, projects N. 20° W.; descend abrupt SW. slope.

79.78 The cor. secs. 3, 4, 9 and 10, 580 ft. below spur.

Land, broken and mountainous with a general northeasterly and northwesterly exposure and drainage.

Soil, shallow, rocky, clay, and sand; 3rd rate.

Undergrowth, scattered shadscale, mountain rush, yellow top and sagebrush.

Timber, scattered juniper and pinon. Fair grazing.


Subdivision, T. 21. S., R. 15. W.

Chains

N. 0°02' W., on true line bet. secs. 3 and 4.  
Ascend abruptly over broken SW. slope of mountainous land through scattered timber and undergrowth.

40.00

On broken SW. slope.  
Set an iron post, 3 ft. long, 1 in. diam., 15 ins. in the ground to bedrock and 15 ins. in a mound of stone, for 1/4 sec. cor., with brass cap marked.



From which,  
A juniper, 6 ins. diam., bears S. 12°30' E., 158 lks. dist., marked 1/4 S3 BT.  
A pinon, 8 ins. diam., bears S. 12°45' W., 137 lks. dist., marked 1/4 S4 BT.

45.40

Spur, 710 ft. above sec. cor., projects N. 30° W.; descend abrupt NE. slope.

55.50

Ravine, drains E., heads 5.00 chs. to the W., 110 ft. below spur, ascend gradual S. slope.


57.00

Intersect the Fourth Standard Parallel South, East, 10.58 chs. dist. from the standard cor. secs. 33 and 34, heretofore described.

At point of intersection, on gradual S. slope, 30 ft. above ravine.

Set an iron post, 3 ft. long, 2 ins. diam., 13 ins. in the ground to bedrock and 17 ins. in a mound of stone, for closing cor. secs. 3 and 4, with brass cap marked.

T20S R15W  
S33



1925

From which,  
A juniper, 12 ins. diam., bears S. 42° E., 76 lks. dist., marked T21S R15W S3 CC BT.  
A pinon, 12 ins. diam., bears S. 34° W., 67 lks.

Subdivision, T. 21 S., R. 15 W.

Land, broken and mountainous with a general southwesterly and northeasterly exposure and drainage.

Soil, shallow, rocky, clay and sand; 3rd rate.

Undergrowth, scattered shadscale, mountain rush, yellow top, sage, and black brush.

Timber, scattered juniper and pinnon.


Fair grazing.

From the cor. secs. 4, 5, 32 and 33, on the S. bdy. of the township, which is an iron post, 2 ins. diam., with brass cap, set, marked and witnessed as described in the finished notes of the survey T. 22 S., R. 15 W. N. 0°03' W., bet. secs. 32 and 33.

Ascend gradually over broken SE. slope of mountainous land through scattered timber and undergrowth.

40.00 On broken E. slope, 270 ft. above sec. cor.

Set an iron post, 3 ft. long, 1 in. diam., 16 ins. in the ground to bedrock and 14 ins. in a mound of stone, for  $\frac{1}{4}$  sec. cor., with brass cap marked.




From which,

A juniper, 8 ins. diam., bears East, 188 lks. dist., marked  $\frac{1}{4}$  S33 BT.

A juniper, 6 ins. diam., bears N. 36° W., 94 lks. dist., marked  $\frac{1}{4}$  S32 BT.

80.00 On broken E. slope, 620 ft. above the  $\frac{1}{4}$  sec. cor.

Set an iron post, 3 ft. long, 2 ins. diam., 20 ins. in the ground to bedrock and 10 ins. in a mound of stone, for cor. secs. 28, 29, 32 and 33, with brass cap marked:



From which:

## Subdivision, T. 21 S., R. 15 W.

## Chains

A juniper, 3 ins. diam., bears N. 77° E., 42 lks. dist., marked BT.

A pinon, 6 ins. diam., bears S. 6° E., 151 lks. dist., marked T21S R15W S33 BT.

A pinon, 10 ins. diam., bears S. 79° W., 138 lks. dist., marked T21S R15W S32 BT.

A pinon, 10 ins. diam., bears N. 89° W., 270 lks. dist., marked T21S R15W S29 BT.

Land, broken and mountainous with a general southeasterly exposure and drainage.

Soil, shallow, rocky, clay and sand loam; 3rd rate.

Undergrowth, scattered shadscale, mountain rush, yellow top, sage, and black brush.

Timber, scattered juniper, and pinon.

Fair grazing.

East, on random line bet. secs. 28 and 33.

40.00 Set temp.  $\frac{1}{4}$  sec. corl

80.00 Intersect the N. and S. line, 16 lks. N. of the cor. secs. 27, 28, 33 and 34.

Hence,

N. 89°53' W., on true line bet. secs. 28 and 33.

Descend abrupt SW. slope of broken mountainous land through scattered undergrowth and timber.

9.20 Ravine, drains SW.; continue descent.

24.80 Spur, 50 ft. high, projects S.; 7.00 chs. dist.; continue descent.

37.00 Ravine, 550 ft. below sec. cor.; drains S. 10° W., 8.00 chs. dist. to junction with ravine at the 9.20 chs. point; ascend abruptly over broken SE. slope.

40.00 On broken SE. slope.

Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground to bedrock and 20 ins. in a mound of stone, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

Subdivision, T. 21 S., R. 15 W.

S28  
 $\frac{1}{4}$   
 S33

1925

From which,

A juniper, 10 ins. diam., bears N. 33° E., 34 lks.  
 dist., marked  $\frac{1}{4}$  S28 BT.

A juniper, 8 ins. diam., bears S. 25°45' E., 34 lks.  
 dist., marked  $\frac{1}{4}$  S33 BT.

80.00 The cor. secs. 28, 29, 32 and 33, 240 ft. above ravine.  
 Band, broken and mountainous with a general southerly  
 exposure and drainage.

Soil, shallow, rocky, clay, and sand loam; 3rd rate.  
 Undergrowth, scattered shadscale, mountain rush, yellow  
 top, sage, and black brush.

Timber, scattered juniper and pinon.

Fair grazing.

N. 0°03' W., bet. secs. 28 and 29.

Ascend abrupt SE. slope of broken mountainous land through  
 scattered undergrowth and timber.

4.20 Spur, 70 ft. above sec. cor., projects S. 30° W.; descend  
 gradual NW. slope of spur.

34.00 Ravine, 110 ft. below spur, drains W., heads 10.00 chs.  
 to the E.; ascend gradual S. slope.

40.00 On top of spur, 50 ft. above ravine, projects W.  
 Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the  
 ground to bedrock and 18 ins. in a mound of stone, for  
 $\frac{1}{4}$  sec. cor., with brass cap marked,

$\frac{1}{4}$   
 S29 | S28  
 1925

From which,

A pinon, 8 ins. diam., bears S. 17° E., 175 lks.  
 dist., marked  $\frac{1}{4}$  S29 BT.

Subdivision, T. 21 N., R. 15 W.

- A pinon, 8 ins. diam., bears S. 25° W., 112 lks. dist., marked S29 BT.
- 50.90 Ravine, 250 ft. below the  $\frac{1}{4}$  sec. cor., drains S. 60° W. 15.00 chs. dist. to the junction with draw crossed at the 34.00 chs. point; ascend abrupt S. slope.
- 77.10 Ridge, 680 ft. above ravine, bears NW. and S. 30° E.; descend abrupt N. slope of ridge.
- 80.00 On abrupt N. slope of ridge, 20 ft. below top. Set an iron post, 3 ft. long, 2 ins. diam., 20 ins. in ground to bedrock and 10 ins. in a mound of stone, for cor. secs. 20, 21, 28 and 29, with brass cap marked.

T21S	R15W
S20	S21
S29	S28
1925	

- From which,
- A pinon, 12 ins. diam., bears N. 31°30' E., 68 lks. dist., marked T21S R15W S21 BT.
  - A pinon, 12 ins. diam., bears S. 36°30' E., 36 lks. dist., marked T21S R15W S28 BT.
  - A pinon, 12 ins. diam., bears S. 49°45' W., 108 lks. dist., marked T21S R15W S29 BT.
  - A pinon, 10 ins. diam., bears N. 81°45' W., 65 lks. dist., marked T21S R15W S20 BT.

Land, broken and mountainous with a general westerly exposure and drainage.

Soil, shallow, rocky, clay, and sand loam; 3rd rate.

Undergrowth, scattered shadscale, mountain marsh, yellow top, sage, and black brush.

Timber, scattered juniper and pinon.

Fair grazing.

- S. 89°53' E., on random line bet. secs. 21 and 25.
- 40.00 Set temp.  $\frac{1}{4}$  sec. cor.
- 80.10 Intersect the N. and S. lines, 14 lks. S. of the cor. secs. 21, 22, 27 and 28.

Subdivision, T. 21 S., R. 15 W.

Chains

- On line N. 89°59' W., on true line bet. secs. 21 and 28.

Over rolling mountainous land through scattered undergrowth and timber.

40.05 On broken NW. slope.

Set an iron post, 3 ft. long, 1 in. diam., 13 ins. in the ground to bedrock and 17 ins. in a mound of stone, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

S21

---

S28

1925

From which,

A pinon, 10 ins. diam., bears N. 74°30' E., 163 lks. dist., marked  $\frac{1}{4}$  S21 BT.

A pinon, 10 ins. diam., bears S. 75° E., 126 lks. dist., marked  $\frac{1}{4}$  S28 BT.

43.00 Ravine, 40 ft. deep, drains N. 70° E.

76.00 Small spur, projects N. 70° E.

80.10 The cor. secs. 20, 21, 28 and 29, 490 ft. above cor. secs. 21, 22, 27 and 28.

Land, broken and mountainous with a general northeasterly exposure and drainage.

Soil, shallow, rocky, loose, sand and clay; 3rd rate.

Undergrowth, scattered shadscale, mountain rush, yellow top, sage, and black brush.

Timber, scattered juniper and pinon.

Fair grazing.

---

N. 0°03' W., bet. secs. 20 and 21.

Descend abruptly over broken NE. slope of mountainous land through scattered undergrowth and timber.

11.70 Ravine, 190 ft. below cor., drains S. 80° E.; ascend abrupt SE. slope.

35.10 Ridge, 260 ft. above ravine, bears N. 20° E. and S. 20° W.; descend gradually over broken W. slope.


40.00 On broken W. slope, of surface rock, mark a cross (X),

Subdivision, T. 21 S., R. 15 W., S. 16

Chains

entire

Set an iron post, 3 ft. long, 1 in diam., 30 ins. in a mound of stone, for 1/4 sec. cor., with brass cap marked



From which,

A pinon, 8 ins. diam., bears S. 5° E., 31 lks. dist., marked 1/4 S21 BT.

A pinon, 8 ins. diam., bears N. 23° W., 97 lks. dist., marked 1/4 S20 BT.

42.40 Head of ravine, 60 ft. below ridge, drains W.; ascend abrupt SW. slope.


50.50 Ridge, 180 ft. above head of ravine, bears N. 20° W. and S. 20° E.; descend gradual SE. slope.

67.20 Small spur, projects NE.

78.60 Ravine, 420 ft. below ridge, drains NE.; ascend gradual SE. slope.

80.00 On gradual SE. slope of surface rock, 20 ft. above ravine mark a cross (X), over which:

Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in a mound of stone, for cor. secs. 16, 17, 20 and 21, with brass cap marked.



From which,

A pinon, 12 ins. diam., bears N. 72° E., 44 lks. dist., marked T21S R15W S16 BT.

A pinon, 12 ins. diam., bears S. 35° E., 79 lks. dist., marked T21S R15W S21 BT.

A pinon, 10 ins. diam., bears S. 31° W., 48 lks. dist., marked T21S R15W S20 BT.

A pinon, 10 ins. diam., bears N. 53° 30' W., 114 lks. dist., marked T21S R15W S17 BT.

Subdivision, T. 21 S., R. 15 W.

Land, broken and mountainous with a general northeasterly exposure and drainage.  
 Soil, shallow, rocky, clay, and sand; 3rd rate.  
 Undergrowth, scattered shadscale, mountain rush, yellow top, black, and sage brush.  
 Timber, scattered juniper and pinon.  
 Fair grazing.

S. 89°59' E., on random line bet. secs. 16 and 21.  
 40.00 Set temp.  $\frac{1}{4}$  sec. cor.  
 80.24 Intersect the N. and S. line, 9 lks. N. of the cor. secs. 15, 16, 21 and 22.

Thence,  
 N. 89°55' W., on true line bet. secs. 16 and 21.  
 Ascend gradually over broken mountainous land through scattered undergrowth and timber.

14.00 Spur, 190 ft. above cor., projects S.; 30.00 chs. dist.; descend abrupt W. slope of spur.

40.12 On broken S. slope.  
 Set an iron post, 3 ft. long, 1 in. diam., 27 in. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

$\frac{1}{4}$  S16  
 S21  
 1925

From which,  
 A juniper, 24 ins. diam., bears N. 74°30' E., 160 lks. dist., marked  $\frac{1}{4}$  S16 BT.  
 A juniper, 18 ins. diam., bears S. 84°30' E., 184 lks. dist., marked  $\frac{1}{4}$  S21 BT.

49.00 Ravine, 520 ft. below spur, drains SE.; ascend abrupt NE. slope.

65.10 Spur, 120 ft. above ravine, projects N. 20° E.; descend gradually along broken W. slope.

78.00 Ravine, 50 ft. below spur, drains N. 20° E.; ascend abrupt E. slope.

## Subdivision, T. 21 S., R. 15 W.

Chains	
80.24	<p>The cor. secs. 16, 17, 20 and 21, 40 ft. above ravine. Land, broken and mountainous with a general southerly exposure and drainage.</p> <p>Soil, shallow, rocky, clay, and sand; 3rd rate.</p> <p>Undergrowth, scattered shadeless, mountain rush, yellow top, sage, and black brush.</p> <p>Timber, scattered juniper and pinon:</p> <p>Fair grazing.</p>
	<p>N. 0°03' W., bet. secs. 16 and 17.</p> <p>Ascend gradually over broken SE. slope of mountainous land through scattered undergrowth and timber.</p>
6.40	<p>Spur, 60 ft. above cor., projects NE.; descend gradual NW. slope.</p>
13.90	<p>Ravine, 90 ft. below spur, drains E.; ascend gradual S. slope.</p>
20.80	<p>Spur, 60 ft. above ravine, projects E., 10.00 chs. dist. descend gradual W. slope.</p>
27.70	<p>Ravine, 70 ft. below spur, drains S. 70° E.; ascend gradual S. slope.</p>
40.00	<p>On gradual S. slope.</p> <p>Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground to bedrock and 12 ins. in a mound of stone, for <math>\frac{1}{4}</math> sec. cor., with brass cap marked.</p>
	<div style="text-align: center;"> <math>\frac{1}{4}</math>            S17   S16            1925         </div>
	<p>From which,</p> <p>A pinon, 8 ins. diam., bears S. 6°30' E., 302 lks. dist., marked <math>\frac{1}{4}</math> S16 BT.</p> <p>A juniper, 6 ins. diam., bears N. 51°15' W., 98 lks. dist., marked <math>\frac{1}{4}</math> S17 BT.</p>
57.50	<p>Spur, 340 ft. above ravine, projects S. 70° E.; descend abrupt N. slope.</p>

## Subdivision, T. 21, S. 2, R. 15 W.

## Chains

80.00 In small open flat, 270 ft. below spur.  
Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. secs. 8, 9, 16, and 17, with brass cap marked.

T21S	R15W
S8	S9

S17	S16
-----	-----

1925

From which:

A juniper, 12 ins. diam., bears S.  $18^{\circ}30'$  W., 110 lks. dist., marked T21S R15W S17 BT.

No other suitable bearing trees available.

Deposit a limestone, 4 x 4 x 4 ins., at base of post, marked with a cross (X).

Land, broken and mountainous with a general easterly exposure and drainage.

Soil, shallow, loose, sand, clay, and rock; 3rd rate.

Undergrowth, scattered shadscale, mountain rush, yellow top, sage, and black brush.

Timber, scattered juniper and pinon.

Fair grazing.

S.  $89^{\circ}55'$  E., on random line bet. secs. 9 and 16.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

80.34 Intersect the N. and S. line, 3 lks. N. of the cor. secs. 9, 10, 15, and 16.

Thence,

N.  $89^{\circ}54'$  W., on true line bet. secs. 9 and 16.

Descend gradually over broken S. slope of mountainous land through scattered undergrowth and timber.

28.40 Ravine, 40 ft. below cor., drains S.  $80^{\circ}$  E.; ascend gradual NE. slope,

40.17 In sagebrush flat.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

Subdivision, T. 21 S., R. 15 W.

Chains

S9

↑

S16

1925

From which,

A juniper, 30 ins. diam., bears S. 24° W., 300 lks. dist., marked  $\frac{1}{4}$  S16 BT.

A juniper, 24 ins. diam., bears N. 80° W., 381 lks. dist., marked  $\frac{1}{4}$  S9 BT.

52.20 Spur, 30 ft. above ravine, projects SE.; descend gradual SW. slope.

72.50 Ravine, 20 ft. below spur, drains S. 70° E.; ascend gradual NE. slope.

80.34 The cor. secs. 8, 9, 16 and 17, 10 ft. above ravine. Land, rolling and broken, with a general southeasterly exposure and drainage. Soil, shallow, rocky, clay and sand loam; 3rd rate; Undergrowth, scattered shadscale, mountain rush, yellow top, and blackrush. Timber, scattered juniper and pinon. Fair grazing.

N. 0°03' W., bet. secs. 8 and 9.

Descend gradually over broken mountainous land through scattered undergrowth and timber.

7.80 Ravine, 40 ft. below cor., drains S. 80° E., ascend gradual S. slope.

32.20 Spur, 20 ft. above ravine, projects E.; thence along W. slope of spur which projects N.

40.00 On W. slope of spur.

Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground; for  $\frac{1}{4}$  sec. cor., with brass cap marked.

S8

↑

S9

1925

From which,

Subdivision, T. 21. S., R. 15 W.

A pinon, 10 ins. diam., bears S. 36°30' E., 43 lks.  
dist., marked  $\frac{1}{4}$  S9 BT.

A pinon, 12 ins. diam., bears N. 58° W., 46 lks.  
dist., marked  $\frac{1}{4}$  S8 BT.

47.80 Top of spur, projects N. 30° W.; thence along broken E.  
slope of spur.

50.00 On broken E. slope of spur.

Set an iron post, 3 ft. long, 2 ins. diam., 10 ins. in  
the ground to bedrock and 20 ins. in a mound of stone,  
for cor. sec. 4, 5, 8 and 9, with brass cap marked:

T21S	R15W
S5	S4
S8	S9
1925	

From which,

A pinon, 10 ins. diam., bears N. 51° E., 45 lks.  
dist., marked T21S R15W S4 BT.

A pinon, 13 ins. diam., bears S. 50° E., 55 lks.  
dist., marked T21S R15W S9 BT.

A pinon, 15 ins. diam., bears S. 47°30' W., 30 lks.  
dist., marked T21S R15W S3 BT.

A pinon, 6 ins. diam., bears N. 35° W., 68 lks.  
dist., marked T21S R15W S5 BT.

Land, broken and mountainous with a general easterly  
and westerly exposure and drainage.

Soil, shallow, rocky, clay, and sand loam; 3rd rate.

Undergrowth, scattered shadscale, mountain rush, yellow  
top, sage, and black brush.

Timber, scattered juniper and pinon.

Fair grazing.

S. 89°54' E., on random line bet. sec. 4 and 9.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

50.10 Intersect the N. and S. line, 12 lks. N. of the cor.  
sec. 3, 4, 9 and 10.

Thence,

Subdivision, T. 21, S. 12, R. 15, W.

Chains

- N. 89°49' W., on true line, bet. sec. 4 and 9a  
 Ascend gradually over broken mountainous land through scattered undergrowth and timber. (cont'd A)
- 8.00 Spur, 70 ft. above cor., projects N. 20° E.; descend abrupt NW. slope.
- 11.70 Ravine, 60 ft. below spur, drains N. 20° E.; ascend abrupt SE. slope.
- 20.40 Spur, 220 ft. above ravine, projects N. 10° E.; descend abrupt W. slope.
- 33.00 Ravine, 130 ft. below spur, drains N. 10° E.; heads 10.00 chs. to the S.; ascend abrupt E. slope.
- 40.05 On abrupt E. slope of spur.  
 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.
- 84  
 $\frac{1}{4}$   
 89  
 1925
- From which,  
 A pinon, 3 ins. diam., bears N. 84° E., 71 lks. dist., marked BT.  
 A pinon, 3 ins. diam., bears S. 9° W., 357 lks. dist., marked BT.  
 No larger bearing trees available.
- 44.50 Spur, 140 ft. above ravine, projects N. 10° E.; descend abrupt W. slope.
- 51.30 Ravine, 140 ft. below spur, drains W., heads 15.00 chs. to the S.; ascend abrupt E. slope.
- 55.20 Spur, 100 ft. above ravine, projects N., 8.00 chs. dist.; descend gradual W. slope.
- 62.10 Ravine, 60 ft. below spur, drains N. 20° E., 9.00 chs. dist. to junction with the ravine at the 51.30 chs. point; ascend gradual E. slope.
- 68.30 Spur, 30 ft. above ravine, projects N.; descend gradual W. slope.
- 75.10 Head of ravine, 30 ft. below spur, drains N.

Subdivision, T. 21 S., R. 15 W.

Chains

75.50 Spur, 30 ft. above head of ravine, projects N.; descend gradually W. slope.

50.00 The cor. secs. 4, 5, 6 and 9, 30 ft. below spur.

Land, broken and mountainous with a general northerly exposure and drainage.

Soil, shallow, loose, sand, clay, and rock; 3rd rate.

Undergrowth, scattered shadscale, mountain rush, yellow top, sage, and black brush.

Timber, scattered juniper and pinon.

Fair grazing.

N. 0°03' W., on true line bet. secs. 4 and 5.


Ascend gradually over broken W. slope of mountainous land through scattered undergrowth and timber.

13.00 Spur, 30 ft. above cor., projects N. 10° W.; descend gradually along broken E. slope of spur.

31.20 Spur, 70 ft. below last spur, projects N. 10° E.; descend gradually along broken W. slope of spur.

40.00 On broken W. slope of spur, 40 ft. below top.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/4 sec. cor., with brass cap marked.



From which,

A pinon, 18 ins. diam., bears N. 42°30' E., 43 lks. dist., marked 1/4 S4 BT.

A pinon, 24 ins. diam., bears N. 45° W., 107 lks. dist., marked 1/4 S5 BT.

49.00 Ravine, 50 ft. below the 1/4 sec. cor., drains N. 20° E., then heads 10.00 chs. to the S. 20° W.

56.70 Intersect the Fourth Standard Parallel South, East, 10.58 chs. dist. from the standard cor. secs. 32 and

33, heretofore described.

At point of intersection, on broken E. slope, 20 ft.

Subdivision, T. 21 S., R. 15 W.

Chains

above ravine. Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for closing cor. secs. 4 and 5, with brass cap marked.

T208 R15W

S33

S5

S4

T21S R15W

O C

From which, A pinon, 8 ins. diam., bears S. 54° E., 138 lks. dist., marked T21S R15W S4 CC BT. A pinon, 12 ins. diam., bears S. 86° 30' W., 119 lks. dist., marked T21S R15W S5 CC BT.

Land, broken and mountainous with a general northeaster exposure and drainage.

Soil, shallow, loose sand, clay, and rock; 3rd rate.

Undergrowth, scattered shadscale, mountain rush, yellow top, sage, and black brush.

Timber, scattered juniper and pinon.

Fair grazing.

From the cor. secs. 5, 6, 31 and 32, on the S. bdy. of the township, which is an iron post, 2 ins. diam., with brass cap, set, marked, and witnessed as described in the finished notes of the survey T. 22 S., R. 15 W. N. 0° 03' W., bet. secs. 31 and 32.

Ascend gradually over broken SE. slope of mountainous land through scattered undergrowth and timber.

14.00 Spur, 140 ft. above cor., projects SW. 1/4 above sec. 42.; Descend gradual NW. slope.


36.40 Ravine, 120 ft. below spur, drains SW.; ascend gradual SE. slope.

40.00 On broken SE. slope. Set an iron post, 3 ft. long, 1 1/2 in. diam., 12 ins. in ground to bedrock and 18 ins. in a mound of stone, for

Subdivision, T. 21 S., R. 15 W.

Chains

1/4 sec. cor., with brass cap marked.



From which,

A pinon, 14 ins. diam., bears N. 17° E., 289 lks. dist., marked 1/4 S32 BT.


A pinon, 8 ins. diam., bears N. 12°45' W., 297 lks. dist., marked 1/4 S31 BT.

57.00 Spur, 250 ft. above ravine, projects S. 60° W.; descend gradual NW. slope.

68.00 Ravine, 150 ft. below spur, drains S. 60° W.; ascend gradual SE. slope.

80.00 On gradual SE. slope.

Set an iron post, 3 ft. long, 2 ins. diam., 22 ins. in the ground to bedrock and 8 ins. in a mound of stone, for cor. secs. 29, 30, 31 and 32, with brass cap marked.



From which,

A juniper, 3 ins. diam., bears N. 50° E., 207 lks. dist., marked BT.

A pinon, 10 ins. diam., bears S. 52°45' E., 367 lks. dist., marked T21S R15W S32 BT.

A juniper, 8 ins. diam., bears N. 25°30' W., 298 lks. dist., marked T21S R15W S30 BT.

No suitable SW. bearing tree available.

Land, broken and mountainous, with a general southwesterly exposure and drainage.

Soil, shallow, rocky, clay and sand; 3rd rate.

Undergrowth, scattered shadscale, mountain rush, yellow top, sage, and black brush.

Timber, scattered juniper and pinon.

Fair grazing.

Subdivision, T. 21 S., R. 15 E.

Chains

anladd

- East, on random line bet. secs. 29 and 32
- 40.00 Set temp.  $\frac{1}{4}$  sec. cor.
- 80.02 Intersect the N. and S. line, 28 lks. N. of the cor. secs. 28, 29, 32 and 33.
- Thence,
- N.  $89^{\circ}43'$  W., on true line bet. secs. 29 and 32.
- Ascend gradually over broken NE. slope of mountainous land through scattered undergrowth and timber.
- 5.60 Rocky spur, 120 ft. above cor., projects SW.; descend gradually over broken NW. slope.
- 40.01 On broken NW. slope.
- Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in th ground to bedrock and 20 ins. in a mound of stone, for  $\frac{1}{4}$  sec. cor., with brass cap marked
- $\frac{1}{4}$  S29
- $\frac{1}{4}$  S32
- 1925
- From which,
- A pinon, 8 ins. diam., bears N.  $17^{\circ}30'$  E., 200 lks. dist., marked  $\frac{1}{4}$  S29 BT.
- No other suitable bearing tree available.
- Deposit a limestone, 6 x 4 x 3 ins., at base of post, marked with a cross (X).
- 56.20 Ravine, drains S.  $60^{\circ}$  W.; continue gradual descent along broken SW. slope.
- 80.02 The cor. secs. 29, 30, 31 and 32, 100 ft. below spur. Land, broken and mountainous with a general southwesterly exposure and drainage.
- Soil, shallow, loose sand, clay, and rock; 3rd rate.
- Undergrowth, scattered shadscale, mountain rush, yellow top, sage, and black brush.
- Timber, scattered juniper and pinon.
- Fair grazing.

... ..

... ..

Subdivision, T. 21 S., R. 15 W.

Chains

West, on true line bet. secs. 30 and 31.

Descend gradually over rolling and broken mountainous land through scattered timber and undergrowth.

7.00 The SW. point of spur; continue gradual descent.

19.60 Ravine, 90 ft. below cor., drains S. 60° W.; ascend gradual E. slope.

40.00 On gradual E. slope of spur.

Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground to bedrock and 12 ins. in a mound of stone, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

$$\frac{S30}{\frac{1}{4}} \\ S31 \\ 1925$$

From which,

A juniper, 16 ins. diam., bears S. 55°30' W., 94 lks. dist., marked  $\frac{1}{4}$  S31 BT.

A juniper, 6 ins. diam., bears N. 63°45' W., 290 lks. dist., marked  $\frac{1}{4}$  S30 BT.

44.60 Spur, 160 ft. above ravine, projects S.; descend gradual W. slope of spur.

61.70 Ravine, 140 ft. below spur, drains S. 20° E., heads 5.00 chs. to the N. 20° W.; ascend gradual E. slope.

72.00 Rocky spur, 200 ft. above ravine, projects S. 10° W.; descend gradual W. slope of spur.

81.19 Intersect the W. boundary of the township, South, 22.80 chs. dist. from the cor. secs. 25 and 36, T. 21 S., R. 16 W., heretofore described.

At point of intersection, on broken W. slope, 140 ft. below spur.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for closing cor. secs. 30 and 31, T. 21 S.,

R. 15 W., with brass cap marked.

T21S	T21S	
R16W	S30	CC
936	S31	
	R15W	

Subdivision, T. 21 S., R. 15 W.

Chains

From which,  
 A juniper, 8 ins. diam., bears N. 55°45' E., 103 lks. dist., marked T21S R15W S30 QC BT.  
 A juniper, 10 ins. diam., bears S. 74° E., 84 lks. dist., marked BT. Tree too scrubby for other marks.  
 Land, rolling and broken, with a general southerly exposure and drainage.  
 Soil, shallow, loose, sand, clay, and rock; 3rd rate.  
 Undergrowth, scattered shadscale, mountain rush, yellow top, sage, and black brush.  
 Timber, scattered juniper and pinon.  
 Fair grazing.

N. 0°03' W., bet. secs. 29 and 30, from cor. secs. 29, 31 and 32.

Ascend gradually over rolling and broken mountainous land through scattered timber and undergrowth.

15.60 Spur, 280 ft. above cor., projects S. 60° W.; descend gradual NW. slope.

38.00 Ravine, 120 ft. below spur, drains SW.; ascend gradual SE. slope.

40.00 On gradual SE. slope.

Set an iron post, 3 ft. long, 1 in. diam., 16 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

S30 | S29  
 1925

From which,

A juniper; 12 ins. diam., bears N. 57°15' E., 46 lks. dist., marked T21S R15W S29 BT.

A juniper, 8 ins. diam., bears S. 30°30' W., 91 lks. dist., marked T21S R15W S30 BT.

60.20 Rocky spur, 690 ft. above ravine, projects S. 60° W.; thence along broken W. slope

80.00 On broken W. slope of surface rock, 100 ft. below spur, mark a cross (X), over which:

## Subdivision, T. 21 S., R. 15 W.

Chain  
 Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in a mound of stone, for cor. secs. 19, 20, 29 and 30, with brass cap marked.

T21S	R15W
S19	S20
S30	S29

1925

From which,

A juniper, 6 ins. diam., bears N.  $38^{\circ}$  E., 59 lks. dist., marked BT. Tree too scrubby for other marks.

A pinon, 8 ins. diam., bears S.  $56^{\circ}15'$  E., 85 lks. dist., marked T21S R15W S29 BT.

A pinon, 8 ins. diam., bears S.  $74^{\circ}30'$  W., 69 lks. dist., marked T21S R15W S30 BT.

A pinon, 10 ins. diam., bears N.  $62^{\circ}45'$  W., 136 lks. dist., marked T21S R15W S19 BT.

Land, broken and rolling, with a general southwesterly exposure and drainage.

Soil, shallow, loose, sand, clay, and rock; 3rd rate.

Undergrowth, scattered shadscale, mountain rush, yellow top, sage, and black brush.

Timber, scattered juniper and pinon.

Fair grazing.

S.  $89^{\circ}48'$  E., on random line bet. secs. 20 and 29.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

80.02 Intersect the cor. secs. 20, 21, 28 and 29.

Thence,

N.  $89^{\circ}48'$  W., on true line bet. secs. 20 and 29.

Ascend gradually over broken mountainous land through scattered undergrowth and timber.

8.00 Ridge, 40 ft. above cor., bears SE., and NW. for 7.00 chs. thence NE.; descend gradual SW. slope.

26.30 Spur, projects S.  $70^{\circ}$  W.; continue descent.

40.01 On broken N. slope.

Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the

Subdivision, St. Stanislaus, Michigan.

Chains

ground, to bedrock and 12 ins. in a mound of stone.  
¼ sec. cor., with brass cap marked.

820  
829  
1925

From which,

A pinon, 10 ins. diam., bears N. 60° W., 55 lks.  
dist., marked ¼ 820 BT.

A pinon, 6 ins. diam., bears S. 79°45' W., 152 lks.  
dist., marked ¼ 829 BT.

80.02 The cor. secs. 19, 20, 29 and 30, 550 ft. below ridge.  
Land, broken and rolling, with a general southeasterly  
exposure and drainage.

Soil, shallow, loose, sand, clay, and rock; 3rd rate.

Undergrowth, scattered shadscale, mountain rush, yellow  
top, sage, and black brush.

Timber, scattered juniper and pinon.

Fair grazing.

West, on true line bet. secs. 19 and 30.

Descend gradually over rolling mountainous land through  
scattered timber and undergrowth.

40.00 On rolling N. slope.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the  
ground, for ¼ sec. cor., with brass cap marked.

819  
830  
1925

From which,

A pinon, 8 ins. diam., bears S. 31° E., 22 lks.  
dist., marked ¼ 830 BT.

A pinon, 12 ins. diam., bears N. 71°45' W., 117 lks.  
dist., marked ¼ 819 BT.

59.10 Ravine; drains SW.; continue descent.

81.02 Intersect the W. bdy. of the township, South, 23.01 chs.

Subdivision, T. 21 S., R. 15 W.

Chains

101 dist. from the cor. secs. 24 and 25, T. 21 S., R. 16 W., heretofore described.

At point of intersection, 720 ft. below the cor. secs. 19, 20, 29 and 30.

Set an iron post, 3 ft. long, 2 ins. diam., 12 ins. in the ground to bedrock and 18 ins. in a mound of stone, for closing cor. secs. 19 and 30, T. 21 S., R. 15 W., with brass cap marked.

T21S	T21S	
	S19	
R16W	CC	
	S30	
S25	R15W	

1925

From which,

A pinon, 10 ins. diam., bears N. 26°30' E., 301 lks. dist., marked T21S R15W S19 CC BT.

No other suitable bearing trees available.

Deposit a limestone, 12 x 7 x 3 ins., at base of post, marked with a cross (X).

Land, rolling and mountainous with a general southwesterly exposure and drainage.

Soil, shallow, loose, sand, clay, and rock; 3rd rate.

Undergrowth, scattered shadscale, mountain rush, yellow top, sage, and black brush.

Timber, scattered juniper and pinon.

Fair grazing.

---

N. 0°03' W., bet. secs. 19 and 20, from the cor. secs. 19, 20, 29 and 30.

Descend abrupt W. slope of broken mountainous land through scattered timber and undergrowth.

17.10 Ravine, 540 ft. below cor., drains W.; ascend abrupt S. slope.

31.00 Spur, 330 ft. above ravine, projects W.; descend abrupt N. slope of spur.

40.00 On abrupt N. slope of spur.


Set an iron post, 3 ft. long, 1 in. diam., 17 ins. in the

Subdivision, T. 21 S., R. 15 W.

Chains

enishu

ground to bedrock and 13 ins. in a mound of stone, for  $\frac{1}{4}$  sec. cor., with brass cap marked.



From which,

A pinon, 8 ins. diam., bears S. 21°30' E., 47 lks. dist., marked  $\frac{1}{4}$  S20 BT.

A pinon, 8 ins. diam., bears N. 35° W., 38 lks. dist., marked  $\frac{1}{4}$  S19 BT.


43.50 Ravine, 300 ft. below spur, drains W.; ascend abrupt S. slope.

50.20 Spur, 160 ft. above ravine, projects W.; 20.00 chs. dist.; descend abrupt N. slope of spur.

63.60 Ravine, 280 ft. below spur, drains S. 60° W.; ascend gradual SE. slope.

80.00 On gradual SE. slope, 140 ft. above ravine.

Set an iron post, 3 ft. long, 2 ins. diam., 18 ins. in the ground to bedrock and 12 ins. in a mound of stone, for cor. secs. 17, 18, 19 and 20, with brass cap marked.



From which,

A pinon, 12 ins. diam., bears N. 59°30' E., 161 lks. dist., marked T21S R15W S17 BT.

A pinon, 12 ins. diam., bears S. 7° E., 104 lks. dist., marked T21S R15W S20 BT.

A pinon, 12 ins. diam., bears S. 7° W., 73 lks. dist., marked T21S R15W S19 BT.

A juniper, 12 ins. diam., bears N. 31°30' W., 55 lks. dist., marked T21S R15W S18 BT.

Land, broken and mountainous with a general southwesterly exposure and drainage.

Soil, shallow, loose, sand, clay, and rock; 3rd rate.

Subdivision, T. 21 S., R. 15 W.

Undergrowth, scattered shadscale, mountain rush, yellow top, sage, and black brush.  
Timber, scattered juniper and pinon.  
Fair grazing.

40.00 S. 89°48' E., on random line bet. secs. 17 and 20.  
Set temp.  $\frac{1}{4}$  sec. cor.  
80.08 Intersect the N. and S. line, 3 lks. N. of the cor. secs. 16, 17, 20 and 21.

Thence,  
N. 59°47' W., on true line bet. secs. 17 and 20.  
Ascend abrupt E. slope of broken mountainous land through scattered timber and undergrowth.

11.80 Ridge, 200 ft. above cor., bears S. and N. 20° W.; descend abrupt W. slope of ridge.

26.00 Head of ravine, drains SW.; continue descent.

40.04 On top of spur, projects S. 50° W., mark a cross (X) on the surfacerock, over which:

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in a mound of stone, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

S17  
 $\frac{1}{4}$   
S20  
1925

From which,  
A juniper, 8 ins. diam., bears N. 69°45' E., 67 lks. dist., marked  $\frac{1}{4}$  S17 BT.

A pinon, 12 ins. diam., bears S. 15°30' W., 130 lks. dist., marked  $\frac{1}{4}$  S20 BT.

76.00 Ravine, 860 ft. below the ridge, drains SW.; ascend abrupt SE. slope.

80.08 The cor. secs. 17, 18, 19 and 20, 50 ft. above ravine. Land, broken and mountainous with a general southwesterly exposure and drainage.

Soil, shallow, loose, sand, clay, and rock; 3rd rate.

Undergrowth, scattered shadscale, mountain rush, yellow

Subdivision, T. 21 S., R. 16 W.

Chains

measured

top, sage, and black brush. Timber, scattered juniper and pinon. Fair grazing.

West, on true line bet. secs. 18 and 19.

Ascend gradually over broken S. slope of mountainous land through scattered undergrowth and timber.

40.00 On surfacerock, mark a cross (X), over which set an iron post, 3 ft. long, 1 in. diam., 30 ins. in a mound of stone, for 1/4 sec. cor., with brass cap marked

S18  
1/4  
S19  
1925

From which,

A juniper, 8 ins. diam., bears N. 22°15' E., 136 lks. dist., marked 1/4 S13 BT.

A juniper, 10 ins. diam., bears S. 45°30' W., 186 lks. dist., marked 1/4 S19 BT.

59.00 Spur, 300 ft. above sec. cor., projects SW.; thence along broken N. slope.

61.01 On broken surfacerock, 210 ft. below spur; intersect the W. bdy. of the township, South, 23.33 chs. dist. from the cor. secs. 13 and 24, T. 21 S., R. 16 W., heretofore described.

At point of intersection, mark a cross (X), on the surfacerock, over which:

Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in a mound of stone, for closing cor. secs. 18 and 19, with brass cap marked.

T21S | T21S  
R16W | S18  
824 | S19  
R15W

1925

From which,

Subdivision, T. 21 S., R. 15 W.

CORNER

A juniper, 8 ins. diam., bears N. 52° E., 51 lks.

dist., marked T21S R15W S18 CC BT.

A pinon, 12 ins. diam., bears S. 46° E., 91 lks.

dist., marked T21S R15W S19 CC BT.

Land, broken and mountainous with a general southwesterly exposure and drainage.

Soil, shallow, loose, sand, clay, and rock; 3rd rate.

Undergrowth, scattered shadscale, mountain rush, yellow top, sage, and black brush.

Timber, scattered juniper and pinon.

Fair grazing.

From the cor. secs. 17, 18, 19 and 20.


N. 0°03' W., bet. secs. 17 and 18.

Ascend abruptly over broken SE. slope of mountainous land through scattered timber and undergrowth.

33.50 Spur, 430 ft. above cor., projects SW; descend gradual N. slope.

40.00 On abrupt N. slope of surfacerock, mark a cross (X), over which:

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in a mound of stone, for  $\frac{1}{4}$  sec. cor., with brass cap marked.



From which,

A pinon, 10 ins. diam., bears S. 32° E., 60 lks. dist., marked  $\frac{1}{4}$  S17 BT.

A pinon, 18 ins. diam., bears S. 60° W., 28 lks. dist., marked  $\frac{1}{4}$  S18 BT.

51.20 Ravine, 120 ft. below spur, drains W., heads 12.00 chs. to the E.; ascend gradual S. slope.

63.70 Spur, 90 ft. above ravine, projects W.; descend gradual N. slope.

## Subdivision, T. 21 S., R. 15 W.

Chains

181300

80.00 On gradual N. slope, 180 ft. below spur.  
Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. secs. 7, 8, 17 and 18, with bra cap marked.

T21S	R15W
S7	S8
S18	S17

1925

From which,

A pinon, 6 ins. diam., bears N. 20° E., 44 lks. dist., marked T21S R15W S8 BT.

A pinon, 10 ins. diam., bears S. 25° E., 81 lks. dist., marked T21S R15W S17 BT.

A juniper, 12 ins. diam., bears S. 46° 30' W., 36 lks. dist., marked T21S R15W S18 BT.

A pinon, 8 ins. diam., marked T21S R15W S7 BT. bears N. 56° 30' W. 92 lks. dist.

Land, broken and mountainous with a general westerly exposure and drainage.

Soil, shallow, loose, sand, clay, and rock; 3rd rate.

Undergrowth, scattered shadscale, mountain rush, yellow top, sage, and black brush.

Timber, scattered juniper and pinon.

Fair grazing.

S. 89° 47' E., on random line bet. secs. 8 and 17.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

80.08 Intersect the N. and S. line, 19 lks. S. of the cor. sec. 8, 9, 16, and 17.

Thence,

N. 89° 55' W., on true line bet. secs. 8 and 17.

Ascend gradually over broken NE. slope of mountainous land through scattered timber and undergrowth.

39.50 Ridge, 250 ft. above cor., bears N. 20° W. and S. 20° E. descend abrupt SW. slope of ridge.

40.04 On broken SW. slope of ridge.

Subdivision, T. 21. S., R. 15. W.

Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground to bedrock and 20 ins. in a mound of stone, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

$\frac{1}{4}$  SS  
S17

1925.

From which,

A pinon, 8 ins. diam., bears N. 47°30' E., 83 lks. dist., marked  $\frac{1}{4}$  SS BT.

A juniper, 12 ins. diam., bears S. 89° E., 92 lks. dist., marked  $\frac{1}{4}$  S17 BT.

68.60 Ravine, 660 ft. below ridge, drains N. 70° W.; thence along broken N. slope.

80.08 The cor. secs. 7, 8, 17 and 18, 30 ft. above ravine.

Land, broken and mountainous with a general northeasterly and westerly exposure and drainage.

Soil, shallow, loose, sand, clay, and rock; 3rd rate.

Undergrowth, scattered shadscale, mountain rush, yellow top, sage, and black brush.

Timber, scattered juniper and pinon.

Fair grazing.

West, on true line bet. secs. 7 and 18.

Descend gradually along broken N. slope of mountainous land through scattered undergrowth and timber.

33.80 Ravine, 240 ft. below cor., drains S. 70° W.; thence along broken S. slope.

40.00 On surfacerock, mark a cross (X), over which:

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in a mound of stone, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

$\frac{1}{4}$  S7  
S18

1925

From which,

A juniper, 10 ins. diam., bears S. 55°45' W., 99 lks.

Subdivision, T. 21 S., R. 15 W.

Chains

501280

dist., marked  $\frac{1}{4}$  S18 BT.

A juniper, 10 ins. diam., bears N. 86° W., 135 lks.

dist., marked  $\frac{1}{4}$  S7 BT.

65.00 Spur, 140 ft. above ravine, projects S. 70° W.; descends gradually along broken N. slope of spur.

73.60 Ravine, 260 ft. below spur, drains SW.; ascend gradual SE. slope.

81.22 Intersect the W. bdy. of the township, South, 23.72 ch dist. from the cor. secs. 12 and 13, T. 21 S., R. 16 heretofore described.

At point of intersection, on gradual SE. slope, 60 ft. above ravine.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for closing cor. secs. 7 and 18, T. 21 S. R. 15 W., with brass cap marked.

T21S	T21S	
	S7	
R16W		CC
	S18	
S13	R15W	

1925

From which,

A pinon, 14 ins. diam., bears N. 21°30' E., 43 lks. dist., marked T21S R15W S7 CC BT.

A pinon, 10 ins. diam., bears S. 87°30' E., 170 lks. dist., marked T21S R15W S18 CC BT.

Land, broken and mountainous with a general southwest exposure and drainage.

Soil, shallow, loose, sand, clay, and rock; 3rd rate.

Undergrowth, scattered shadscale, mountain rush, yellow top, sage, and black brush.

Timber, scattered juniper and pinon.

Fair grazing.

Subdivision, T. 21 S., R. 15 W.

From the cor. secs. 7, 8, 17 and 18.

N. 0°03' W., bet. secs. 7 and 8.

Descend gradually over broken NE. slope of mountainous land through scattered undergrowth and timber.

2.40 Ravine, 20 ft. below cor., drains N. 70° W.; ascend gradual SW. slope of sour.

7.50 Sour, 40 ft. above ravine, projects N. 70° W., 10.00 chs. dist.; descend gradual N. slope.


12.10 Ravine, 100 ft. below sour, drains W., 10.00 chs. dist.

to junction with ravine crossed at the 2.40 chs. point; ascend abrupt S. slope.

37.00 Ridge, 540 ft. above ravine, bears NW. and SE.; descend abrupt N. slope.

40.00 On abrupt N. slope.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.



From which,


A pinon, 8 ins. diam., bears N. 6° E., 22 1/2 dist., marked  $\frac{1}{4}$  S8 BT.

A pinon, 10 ins. diam., bears N. 73° W., 37 lks. dist., marked  $\frac{1}{4}$  S7 BT.

67.50 Ravine, 380 ft. below ridge, drains NE.; ascend gradual SE. slope.

80.00 On gradual E. slope, 70 ft. above ravine.

Set an iron post, 3 ft. long, 2 ins. diam., 20 ins. in the ground to bedrock and 10 ins. in a mound of stone, for cor. secs. 5, 6, 7 and 8, with brass cap marked.



1925

## Subdivision, T. 21 S., R. 15 W.

Chains

REIACO

From which, . . . . .

A pinon, 18 ins. diam., bears N. 86° E., 22 lks.  
dist., marked T21S R15W S5 BT.

A pinon, 18 ins. diam., bears S. 31° E., 48 lks.  
dist., marked T21S R15W S8 BT.

A pinon, 16 ins. diam., bears S. 76° 30' W., 31 lks.  
dist., marked T21S R15W S7 BT.

A pinon, 10 ins. diam., bears N. 57° W., 108 lks.  
dist., marked T21S R15W S6 BT.

Land, broken and mountainous with a general northeaster  
and southwesterly exposure and drainage.

Soil, shallow, loose, sand, clay, and rock; 3rd rate.

Undergrowth, scattered shadscale, mountain-rush, yellow  
top, sage, and black brush.

Timber, scattered juniper and pinon.

Fair grazing.

S. 89°55' E., on random line bet. secs. 5 and 8.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

80.00 Intersect the N. and S. line, 16 lks. S. of the cor.  
secs. 4, 5, 8 and 9.

Thence,

S. 89°58' W., on true line bet. secs. 5 and 8.

Descend abrupt W. slope of broken mountainous land thro  
scattered undergrowth and timber.

5.40 Ravine, 450 ft. below sec. cor., drains N. 10° W.;  
ascend abrupt E. slope.

10.90 Spur, 80 ft. above ravine, projects N. 20° W.; 8.00 chs.  
dist., descend abrupt SW. slope.

22.50 Ravine, 330 ft. below spur, drains N. 30° E.; 9.00 chs.  
dist. to junction with the ravine at 5.40 chs. point;  
ascend abrupt E. slope.

37.00 Spur, 160 ft. above ravine, projects N. 20° W.; descend  
abrupt SW. slope.

40.00 On broken SW. slope of surfacerock, mark a cross (X),

Subdivision, T. 21 S., R. 15 W.

main  
DETAILS

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in a mound of stone, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

S5

$\frac{1}{4}$  S8

1925

From which,

A juniper, 6 ins. diam., bears S. 31°15' E., 105 lks.

dist., marked  $\frac{1}{4}$  S8 BT.

A pinon, 6 ins. diam., bears N. 55°15' W., 45 lks.

dist., marked  $\frac{1}{4}$  S5 BT.

47.20 Ravine, 120 ft. below sour, drains N. 30° W.; ascend gradual NE. slope.

54.60 Spur, 40 ft. above ravine, projects N.; descend abrupt W. slope.

62.30 Ravine, 100 ft. below sour, drains N.; ascend gradual E. slope.

80.00 The cor. secs. 5, 6, 7 and 8, 100 ft. above ravine. Land, broken and mountainous with a general northerly exposure and drainage. Soil, shallow, loose, sand, clay, and rock; 3rd rate. Undergrowth, scattered shadscale, mountain rush, yellow top, sage, and black brush. Timber scattered juniper and pinon. Fair grazing.

West, on true line bet. secs. 6 and 7.

Ascend gradually along broken S. slope of mountainous land through scattered timber and undergrowth.

40.00 On broken E. slope.

Set an iron post, 3 ft. long, 1 in. diam., 6 ins. in the ground to bedrock and 24 ins. in a mound of stone, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

S6

$\frac{1}{4}$  S7

1925

Chains

From which,

A pinon, 8 ins. diam., bears S. 69° W., 38 lks. dist., marked  $\frac{1}{4}$  87 BT.

A pinon, 8 ins. diam., bears N. 18° W., 73 lks. dist., marked  $\frac{1}{4}$  86 BT.

42.80 Ridge, 200 ft. above sec. cor., bears SE. and NW.; descend gradual SW. slope.

52.30 Head of ravine, 50 ft. below ridge, drains SW.; ascend gradual SE. slope.

57.50 Spur, 40 ft. above ravine, projects SW.; descend gradual NW. slope.

68.80 Head of ravine, 120 ft. below spur, drains S. 70° W.; ascend gradual SE. slope.

77.60 Spur, 40 ft. above ravine, projects S. 70° W.; descend gradual NW. slope.

81.41 Intersect the W. bdy. of the township, South, 23.77 chs. dist., from the cor. secs. 1 and 12, T. 21 S., R. 16 W. heretofore described.

At point of intersection, on broken NW. slope, 40 ft. below spur.

Set an iron post, 3 ft. long, 2 ins. diam., 20 ins. in the ground to bedrock and 10 ins. in a mound of stone, for closing cor. secs. 6 and 7, T. 21 S., R. 15 W., with brass cap marked.

T21S	T21S	
	86	
R16W		CC
	87	
S12	R15W	

1925

From which,

A pinon, 10 ins. diam., bears N. 55°30' E., 163 lks. dist., marked T21S R15W S6 CC BT.

A pinon, 18 ins. diam., bears S. 59°30' E., 152 lks. dist., marked T21S R15W S7 CC BT.

Land, broken and mountainous with a general northeasterly and southwesterly exposure and drainage.

## Subdivision, T. 21 S., R. 15 W.

- Chain
- Soil; shallow, loose, sand, clay, and rock; 3rd rate.
- Undergrowth, scattered shadscale, mountain-rush, yellow top, sage, and black brush.
- Timber, scattered juniper and pinon.
- Fair grazing.
- 
- From the cor. secs. 5, 6, 7 and 8.
- N. 0°03' W., on true line bet. secs. 5 and 6.
- Ascend gradually over broken S. slope of mountainous land through scattered undergrowth and timber.
- 7.00 Spur, 20 ft. above cor., projects E.; descend gradual N. slope.
- 29.30 Ravine, 210 ft. below spur, drains N. 80° E.; ascend abrupt SE. slope.
- 33.00 The E. point of spur, 50 ft. above ravine; descend gradual NE. slope.
- 35.60 Ravine, 60 ft. below point of spur, drains S. 80° E., 5.00 chs. dist. to junction with the ravine at the 29.30 chs. point; ascend gradual S. slope.
- 40.00 On gradual S. slope of surfacerock, mark a cross (X), over which:
- Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in a mound of stone, for  $\frac{1}{4}$  sec. cor., with brass cap marked
- $\frac{1}{4}$   
 S6 | S5  
 1925
- From which,
- A pinon, 8 ins. diam., bears N. 37° E., 14 lks. dist., marked  $\frac{1}{4}$  S5 BT.
- A juniper, 6 ins. diam., bears S. 16° W., 7 $\frac{1}{2}$  lks. dist., marked  $\frac{1}{4}$  S6 BT.
- 44.20 Spur, 90 ft. above ravine, projects E., 7.00 chs. dist.; descend gradual N. slope.
- 50.15 Ravine, 30 ft. below spur, drains S. 60° E.; heads 10.00 chs. to the W.; ascend gradual S. slope.

Subdivision, T. 21 S., R. 15 W.

Chains

201540

56.78 Intersect the Fourth Standard Parallel South, East, 10.89 chs. dist. from the standard cor. sec. 31 and 32, heretofore described.

At point of intersection, on surface rock, 40 ft. above ravine, mark a cross (X), over which Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in mound of stone, for closing cor. secs. 5 and 6, with brass cap marked.

T20S R15W S32

S6 | S5 T21S R15W C C

1925

From which, A juniper, 1 1/2 ins. diam., bears S. 49° E., 146 lks. dist., marked T21S R15W S5 CC BT. A pinon, 3 ins. diam., bears S. 15° 15' W., 348 lks. dist., marked T21S R15W S6 CC BT.

Land, broken and mountainous with a general easterly exposure and drainage. Soil, shallow, loose, sand, clay, and rock; 3rd rate. Undergrowth, scattered shadscale, mountain rush, yellow top, sage, and black brush. Timber, scattered juniper and pinon. Fair grazing.

Closing Errors, T. 21 S., R. 15 W.

Line designated	True bearings	Distances Chs.	Latitudes		Departures	
			N. Chs.	S. Chs.	E. Chs.	W. Chs.
4th St. P. S. R14W	West	10.02				10.02
4th St. P. S. R15W	West	470.54				470.54
W. Bdy. T21S R15W	South	456.40		456.40		
S. Bdy. T21S R15W	East	481.42			481.42	
E. Bdy. T21S R15W	North	457.00	457.00			
Convergency	West	59				59
			457.00	456.40	481.42	481.15
			456.40		481.35	
Errors in latitudes and departures			0.60		0.27	

Errors in latitudes and departures 0.60 0.27

Errors in latitudes and departures 0.60 0.27

## General Description, T. 21 S., R. 15 W.

The land within the boundaries of this township, is exceedingly rough and broken, being cut by deep canyons, rimmed with broken limestone ledges.

The soil consists of a shallow, loose, rocky, clay, and sand loam, and may be classified as third rate.

The entire township is covered with a scattered growth of juniper and pinon timber, which has no commercial value except for fire wood and fencing. In some places on the sheltered north slopes of the high ridges and spurs, a few scattered spruce are found.

A scattered undergrowth of shadscale, scrub mahogany, mountain rush, yellow top, sage, and black brush and native grasses, are found throughout the township, and which affords fair grazing for stock.

No water was found in this township and no portions of it are suitable for farming. The township in general, is suitable for a winter grazing range for stock and was being used for that purpose at the time of the survey.

No roads, improvements, indications of mineral, oil, or oil shale were found in the township.

No settlers were living on the township at the time of the survey.

The magnetic declination was not taken on account of a defective needle.

**Blank**

**Page**



CERTIFICATE OF UNITED STATES SURVEYOR.

I, Willis W. Bandy, U. S. Surveyor, hereby certify upon honor that, in pursuance of special instructions received from the District Cadastral Engineer for Utah bearing date of the 18th day of March, 1921, I have well, faithfully, and in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, surveyed all those parts or portions of Independent resurvey of the Fourth Standard Parallel South through Range 15 West establishment of one-quarter section corners on west boundary, and subdivision of, T. 21 S., R. 15 W.

of the Salt Lake Base and Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by me, and under my direction; and that all the corners of said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the District Cadastral Engineer for District No. 1 and in the specific manner described in the field notes, and that the foregoing are the original field notes of such survey.

Place: De Land, Florida

Willis W. Bandy

U. S. Surveyor

Date: May 12, 1928

APPROVAL.

OFFICE OF U. S. SUPERVISOR OF SURVEYS,  
Denver, Colorado

APR 2 1929

The foregoing field notes of the ~~survey~~ independent resurvey of the fourth standard parallel south through range 15 west; establishment of one-quarter section corners on the west boundary; and the subdivision of Township No. 21 South, Range No. 15 West of the Salt Lake Base and Meridian, Utah

executed by Willis W. Bandy, U. S. Surveyor

under ~~his~~ special instructions dated March 18, 1921, having critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

W. H. Denson  
U. S. Supervisor of Surveys

I certify that the foregoing transcript of the field notes of the above described surveys in Utah, has been correctly copied from the original notes on file in this office.

U. S. Supervisor of Surveys

**Blank**

**Page**

**Blank**

**Page**

Surveyor, G.L.O.

"A"

4-573

RECEIVED

MAY 28 1927

District Cadastral Engineer  
Salt Lake City, Utah

BOOK A-481

# FIELD NOTES

OF THE SURVEY OF THE

INDEPENDENT RESURVEY OF THE NORTH AND EAST BOUNDARIES AND SURVEY  
OF THE SUBDIVISION OF, T. 22 S., R. 13 W.

Of the Salt Lake Base and Meridian,

In the State of Utah

EXECUTED BY

Willis W. Bandy

In the capacity of U. S. Surveyor, under instructions dated March 19, 1921,  
issued by the United States Surveyor General to govern surveys included in  
Group No. 101, which were approved by the Commissioner of the General Land  
Office, March 25, 1921. Supplemental Assignment Instructions  
dated May 5, 1925.

Survey commenced June 20, 1925

Survey completed July 20, 1925

BOOK A-481

INDEX DIAGRAM.

Township		22 South					Range					13 West	
14	13	12	11	10	9	8	7	6	5	4	3	2	1
6	68	5	53	4	43	3	32	2	22	1			8
67		66		53		42		31		22			
7	65	8	52	9	41	10	30	11	21	12			8
64		63		51		40		29		20			
18	62	17	50	16	39	15	28	14	20	13			7
61		60		49		38		27		19			
19	59	20	48	21	37	22	26	23	18	24			6
59		58		47		36		26		17			
30	57	29	46	28	35	27	25	26	16	25			5
56		55		45		34		24		15			
31	54	32	44	33	33	34	23	35	14	36			4

T. 22 S., R. 13 W.

DATE DIAGRAM

7-1-25	7-1-25	7-1-25	7-1-25	7-1-25	7-1-25
6	5	4	3	2	1
7-20-25	7-18-25	7-17-25	7-17-25	7-6-25	6-21-25
7	8	9	10	11	12
7-9-25	7-18-25	7-8-25	7-6-25	6-30-25	6-20-25
18	17	16	15	14	13
7-9-25	7-8-25	7-2-25	6-30-25	6-26-25	6-26-25
19	20	21	22	23	24
7-3-25	7-2-25	6-29-25	6-26-25	6-24-25	6-22-25
30	29	28	27	26	25
7-3-25	6-29-25	6-25-25	6-25-25	6-24-25	6-22-25
31	32	33	34	35	36
6-29-25	6-25-25	6-25-25	6-24-25	6-22-25	6-20-25

All lines surveyed by Willis W. Bandy, U.S. Surveyor.

DESCRIPTION AND TESTS OF INSTRUMENTS.

Survey commenced June 20, 1925, and executed with Young and Sons solar transit No. 8513. The instrument is equipped with Smith solar attachment and full vertical circle. The horizontal limb has two verniers placed opposite to each other and reading to single minutes of arc, which is also the least count of the verniers of the latitude and declination arcs, and vertical circle.

The instrument was approved for use on this survey by the

T. 22 S., R. 13 W.

Assistant Supervisor of Surveys for District No. 6, conditional upon satisfactory field tests, in supplemental assignment instructions dated May 5, 1925.

I examine the adjustments of the instrument and correct all errors. I then test the solar apparatus by comparing its indications resulting from solar observations made during a.m. and p.m. hours, with a meridian determined by observations made on Polaris as follows

June 24, 1925: At my camp located in NW. 1/4 sec. 33, T. 22 S., R. 13 W., in approximate latitude 38°51' N. longitude 113°18' W.; at 1h 29.8m a.m. local mean time. I observe Polaris at eastern elongation, making four observations, two each with the telescope in direct and reversed positions, and mark the mean point in the line thus determined by a tack in a stake driven firmly in the ground 10 chains to the N. of my station. Azimuth of Polaris at eastern elongation= 1°25' E.

I lay off the azimuth of Polaris, 1°25' to the W. and mark the meridian by a tack in a stake driven firmly in the ground, 10 chains N. of my station.

At 9h 00m a.m. apparent time, with the instrument in the meridian, I set off 38°51' N., on the latitude arc, 1°25'30" N., on the declination arc, and determine a meridian with the solar which I find to agree with the true meridian.

At apparent noon, with the instrument in the meridian, I make an altitude observation of the sun for time and latitude, observing simultaneously the altitude of the sun's upper limb and the transit of the sun's west limb, reversing the telescope and observing simultaneously the altitude of the sun's lower limb and the transit of the sun's east limb.

Mean observed altitude =	74° 34' 30"
Reduced latitude=	38° 51' N.
Mean watch time of observation=	12h 29m 53s
Watch fast of local mean time=	0h 37m 43s

At apparent noon, with the instrument in the meridian

T. 22 S., R. 13 W.

and  $38^{\circ}51'$  N., set off on the latitude arc, I find the reading of the declination arc to be  $23^{\circ}25'30''$  N., which agrees with the computed declination of the sun. At 3h 00m p.m. apparent time, with the instrument in the meridian and the latitude arc unchanged, I set off  $23^{\circ}25'30''$  N., on the declination arc, and determine a meridian with the solar which I find to agree with the true meridian.

As all the solar observations made during the usual hours of solar work come within  $1'$  of the true meridian, I conclude that the instrument is in satisfactory adjustment.

The instrument was kept in good adjustment throughout the progress of this survey, frequent tests being made on the meridian determined by observations made of Polaris as heretofore described.

For test of instrument near the completion of the survey of this township, see test given at the commencement of the survey T. 21 S., R. 13 W. of this group.

---

#### MEASUREMENTS

Unless otherwise specified, all measurements are made with a Lallie steel tape 5 chains in length compared with a Lufkin standard steel tape 1 chain in length and found correct. The measurements are made on the slope, the vertical angle determined and the slope measurements properly reduced to true horizontal distances.

---

#### METHOD AND ORDER OF PROCEDURE

The south boundary of this township was surveyed under this same group. The course of this boundary is N.  $89^{\circ}50'$  W., and the distance 477.70 cha., the fractional distance being placed in the western half mile.

The west boundary was surveyed by Elliot Bird, U.S.

## METHOD AND ORDER OF PROCEDURE

## Chains

Transitman under group 74, Utah in year 1918. The course of this boundary is North, and the distance 480 chains.

The north and east boundaries have been reported as surveyed by Andrew J. Stewart in year 1882, but no trace of this survey was found; therefore an independent resurvey was made of both these boundaries. The east boundary is the Sevier Lake Guide Meridian and is run north from the cor. T<sub>s</sub>. 22 and 23 S., R<sub>s</sub>. 12 and 13 W. a distance of 480 chains where the cor. T<sub>s</sub>. 21 and 22 S., R<sub>s</sub>. 12 and 13 W. is set.

The north boundary was run random and true from the cor. T<sub>s</sub>. 21 and 22 S., R<sub>s</sub>. 12 and 13 W. to the cor. T<sub>s</sub>. 21 and 22 S., R<sub>s</sub>. 13 and 14 W. The course of this boundary is N. 89°46' W., and the distance 477.29 chains. The fractional distance of this boundary was placed in the western half mile.

The township was subdivided in the regular manner, from south to the north and east to the west and the fractional distances were placed against the north and west boundaries.

INDEPENDENT RESURVEY SEVIER LAKE GUIDE MERIDIAN THROUGH T. 22 S., BETWEEN R<sub>s</sub>. 12 and 13 W., SUPERSEDING SURVEY MADE BY ANDREW J. STEWART IN YEAR 1882.

From the cor. T<sub>s</sub>. 22 and 23 S., R<sub>s</sub>. 12 and 13 W., which is an iron post, 3 ins. diam., with brass cap, set, marked and witnessed as described in the official records of the survey T. 23 S., R. 13 W.

North, bet. secs. 31 and 36, along the E. bdy. of the township.

Over rolling bench land through scattered undergrowth.

40.00

On gradual E. slope of rolling bench land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

INDEPENDENT RESURVEY SEVIER LAKE GUIDE MERIDIAN THROUGH  
T. 22 S., BETWEEN R6. 12 and 13 W.

†  
836 | 831

1925

- Raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.
- 48.00 Wash, 30 lks. wide, 2 ft. deep, course E.
- 80.00 On broken E. slope.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. secs. 25, 30, 31 and 36, with brass cap marked.

T22S	
R12W	R12W
S25	S30
S30	S31

1925

Raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor. Land, broken and rolling, with a general easterly exposure and drainage.

Soil, shallow sandy clay loam; rd. etc.

Undergrowth, scattered sprucebrush, black-cedar, mountain rush and yellow top.

No timber.

Fair grazing.

North, bet. secs. 25 and 30.

Ascend gradual E. slope of rolling and broken land through scattered undergrowth.

- 40.00 On broken E. slope.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 2 sec. cor., with brass cap marked.

†  
825 | 830

1925

- Raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.
- 63.40 Top of ascent at E. point of rocky spur, 120 ft. above ½ sec. cor.; descend gradual E. slope.

- 80.00 On gradual E. slope, 40 ft. below top of rocky point.

Set an iron post, 3 ft. long, 2 ins. diam., 12 ins. in the ground to bedrock and 24 ins. in a mound of stone.

INDEPENDENT RESURVEY SEVIER LAKE QUADRANGLE  
T. 22 S., BETWEEN R. 12 and 13 W.

Chains

for cor. secs. 19, 24, 25 and 30, with brass cap marked.

T22S	
R13W	R12W
S24	S19
S25	S30

1925

Deposit a limestone, 8 x 7 x 2 ins., at base of post, marked with a cross (X).

Land, rolling and broken, with a general easterly exposure and drainage.

Soil, shallow clay, sand, and rock loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

North, bet. secs. 19 and 24.

Descend gradually over broken NE. slope through scattered undergrowth.

26.10 Wash, 20 lks. wide, 2 ft. deep, course E.

40.00 On broken NE. slope.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

$\frac{1}{4}$	
S24	S19
1925	

Raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, W. of cor.

80.00 On rolling NE. slope.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. secs. 13, 18, 19 and 24, with brass cap marked.

T22S	
R13W	R12W
S13	S18
S24	S19

1925

Raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, W. of cor.

Land, broken and rolling with a general northeast slope.

INDEPENDENT RESURVEY SEVIER LAKE GUIDE MERIDIAN THROUGH T. 22 S., BETWEEN RS. 12 and 13 W.

Basins

exposure and drainage.

Soil, shallow rocky clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.


North, bet. secs. 13 and 18.

Over rolling bench land through scattered undergrowth.

15.50 Wash, 30 lks. wide, 3 ft. deep, course S. 70° E.

40.00 On rolling bench land.


Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.



Dig pits, 18 x 18 x 12 ins., N. and S. of post, 3 ft. dist.

80.00 On rolling land.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. secs. 7, 12, 13 and 18, with brass cap marked.



Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Land, rolling benches.

Soil, deep clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

INDEPENDENT RESURVEY SEVIER LAKE GUIDE MERIDIAN FROM  
T. 22 S., BETWEEN RS. 12 and 13 W.

Chains

North, bet. secs. 7 and 12.

Over rolling bench land through scattered undergrowth.

40.00 On rolling bench land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 4 sec. cor., with brass cap marked.

	†	
S12		S7
1925		

Dig pits, 16 x 16 x 12 ins., N. and S. of post, 3 ft.

dist. Also, deposit a limestone, 6 x 4 x 4 ins., at base of post, marked with a cross (X).

40.00 On rolling bench land.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. secs. 1, 6, 7 and 12, with brass cap marked.

T22S		
R13W		R12W
S1		S6
S12		S7
1925		

Dig pits, 16 x 16 x 12 ins., in each sec., 3 ft. dist.

from post. Also, deposit a limestone, 6 x 4 x 4 ins., base of post, marked with a cross (X).

Land, rolling benches.

Soil, deep clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

North, bet. secs. 1 and 6.

Over rolling land through scattered undergrowth.

40.00 On rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 4 sec. cor., with brass cap marked.

	†	
S1		S6

INDEPENDENT RESURVEY BEVIER LAKE GUIDE MERIDIAN THROUGH  
Ts. 22 S., BETWEEN RS. 12 and 13 W.

Chains

52.70 Raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.  
Wash, 75 lks. wide, 3 ft. deep, course N. 70° E.  
80.00 On rolling land.  
Set an iron post, 3 ft. long, 3 ins. diam., 27 ins. in  
the ground, for cor. Ts. 21 and 22 S., Rs. 12 and 13 W.,  
with brass cap marked.

T21S	
R13W	R12W
S36	S31
S1	S6
T22S	
1925	

Raise a mound of stone, 2 ft. base, 2 ft. high, S. of cor.  
Land, rolling, with a general northeasterly exposure and  
drainage.  
Soil, deep clay and sand loam; 3rd rate.  
Undergrowth, scattered br. cbrush, shadscale, mountain  
rush and yellow top.  
No timber.  
Fair grazing.

INDEPENDENT RESURVEY NORTH BOUNDARY T. 22 S., R. 14 W.  
SUPERSEDING SURVEY EXECUTED BY ANDREW J. STEWART IN 1882.

From the cor. Ts. 21 and 22 S., Rs. 12 and 13 W.,  
N. 89°50' W., on random line along the N. bdy. of the  
township, setting temp. 3 sec. and sec. cors. at  
intervals of 40 and 80 chains, and at:

477.29 Intersect the W. bdy. of the township, 8. 28 lks. dist. of  
the cor. Ts. 21 and 22 S., Rs. 13 and 14 W., which is  
an iron post, 3 ins. diam., with brass cap, set, marked,  
and witnessed as described in the official records of  
the survey T. 22 S., R. 14 W.

The bearing of this boundary therefore is, N. 89°48' W.,  
and the distance is 477.29 chs.

Thence,

From the cor. Ts. 21 and 22 S., Rs. 12 and 13 W.,  
N. 89°48' W., on true line bet. secs. 1 and 36, along the  
N. bdy. of the township.

## INDEPENDENT RESURVEY NORTH BOUNDARY T. 22 S., R. 13 W.

## Chains

Over rolling bench land through scattered undergrowth.

40.00 On rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

S36
+-----
S1

1925

Raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$  ft. high, N. of cor.

80.00 On rolling land.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. secs. 1, 2, 35 and 36, with brass cap marked.

T21S	R13W
S35	S36
-----	-----
S2	S1
T22S	

1925

Raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$  ft. high, W. of cor. Land, rolling.

Soil, deep clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

1. 89°48' W., on true line bet. secs. 2 and 35.

Over rolling land through scattered undergrowth.

11.20 Wash, 40 lks. wide, 3 ft. deep, course NE.

28.75 Road, bears N. 20° W. and S.; thence ascend gradually over rocky S. slope of spur

40.00 On rocky S. slope of spur.

Set an iron post, 3 ft. long, 1 in. diam., 6 ins. in the ground to solid rock and 30 ins. in a mound of stone, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

S35
+-----
S2

1925

## INDEPENDENT RESURVEY NORTH BOUNDARY T. 22 S., R. 13 W.

Chains

Deposit a lava stone, 12 x 10 x 8 ins., at base of post, marked with a cross (X).

74.60 Top of ascent, 360 ft. above sec. cor., bears N. and S.; descend gradually along rocky S. slope.

79.70 Ravine, 40 ft. below top of ascent, course SE.; heads 4.00 chs. N.; ascend broken SE. slope.

80.00 On broken SE. slope, 5 ft. above ravine.

Set an iron post, 3 ft. long, 2 ins. diam., 14 ins. in the ground to solid rock and 22 ins. in a mound of stone, for cor. secs. 2, 3, 34 and 35, with brass cap marked

T21S	R13W
S34	S35
S3	S2
T22S	

1925

Deposit a lava stone, 8 x 6 x 6 ins., at base of post, marked with a cross (X).

Land, rolling and broken, with a general southerly exposure and drainage.

Soil, shallow rocky clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

N. 89°42' W., bet. secs. 3 and 34.

Ascend abrupt rocky SE. slope through scattered undergrowth.

9.30 Spur, 190 ft. above cor., projects SE. from ridge which bears NW. and N. 80° E.; descend gradually over broken SW. slope.

40.00 At base of descent, bearing NW and SE., 220 ft. below spur.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

$\frac{1}{4}$	S34
	S3

INDEPENDENT RESURVEY NORTH BOUNDARY T. 22 S., R. 15 W.

Chaining

- Raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.
- 49.40 Wash, 30 lks. wide, 1 ft. deep, course S. 70° E.
- 51.60 Same wash, course N. 80° E.
- 61.00 Same wash, course SE.
- 80.00 On gradual E. slope.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. secs. 3, 4, 33 and 34, with brass cap marked.

T21S	R13W
S33	S34
S4	S3
T22S	

1925

Raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor. Land, rolling and broken, with a general southerly exposure and drainage.

Soil, shallow and deep clay and sand loam; 3rd rate. Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

N. 89°48' W., bet. secs. 4 and 33.

Over rolling land through scattered undergrowth.

- 40.00 On rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for ¼ sec. cor., with brass cap marked.

S33
¼
S4

1925

Raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.

- 67.10 Road, bears N. and S.

- 80.00 On rolling land.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. secs. 4, 5, 32 and 33, with brass cap marked.

INDEPENDENT RESURVEY NORTH BOUNDARY T. 22 S., R. 13 W.

Chains.

T21S	R13W
S 32	S 33
S 5	S 4
T22S	
1925	

Raise a mound of stone, 2 ft. base, 1½ ft. high W. of cor.

Land, rolling.

Soil, deep clay and sandy loam, 3rd. rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

N. 89° 48' W. bet. secs. 5 and 32.

Over rolling land through scattered undergrowth.

8.40 Wash, 40 lks. wide, 1 ft. deep, course S. 70°E.

33.40 Spur, 90 ft. above sec.cor., projects N. 15 chs. dist.

40.00 Set an iron post, 3 ft. long, 1 in.diam., 27 ins. in the ground, for sec.cor., with brass cap marked:

S 32
S 5
1925

Raise a mound of stone, 2 ft. base, 1½ ft.high,N. of cor.

43.60 Wash, 30 lks. wide, 1 ft. deep, 60 ft. below spur, course NE.; same wash as last, ascend gradual E slope.

80.00 On gradual E. slope of ridge, 210 ft. above wash, Set an iron post, 3 ft. long, 2 ins.diam., 12 ins.in the ground to solid rock and 24 ins. in mound of stone, for cor. secs. 5,6,31 and 32, with brass cap marked:

T21S	R13W
S 31	S 32
S 6	s 5
T22 S	
1925	

Deposit a limestone, 8x6x4 ins., at base of post, marked with a cross (X).

Land, rolling.

Soil, deep and shallow clay and sandy loam, 3rd.rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.


## INDEPENDENT RESURVEY NORTH BOUNDARY T. 22 S., R. 13 W.

Chains	N. 89° 48' W., bet. secs. 6 and 31. Ascend abrupt E. slope of ridge through scattered undergrowth.
1.10	Top of ridge, 10 ft. above cor., bears N. and S.; descend abrupt W. slope of ridge.
40.00	At base of hills, 460 ft., below top of ridge, bearing N. and S. Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground to solid rock and 16 ins. in mound of stone for $\frac{1}{4}$ sec. cor., with brass cap marked; $\begin{array}{r} S\ 31 \\ \frac{1}{4} \\ \hline S\ 6 \\ 1925 \end{array}$
	Deposit a limestone, 8x6x4 ins., at base of post, marked with a cross (X) Thence descend gradually over broken W. slope.
58.00	Base of descent, bears N. and S., thence over level land
77.29	The cor. Ts. 21 and 22 S., Rs. 13 and 14 W. Land, rolling and broken with a general westerly exposure and drainage W. 76.19 chs. Exposure and drainage E., E. 1.10 chs. Soil, shallow and deep clay and sand loam; 3rd. rate. Undergrowth, scattered sagebrush, shadscale, mountain rush, and yellow top. No timber. <u>Fair grazing.</u>
SUBDIVISION, T. 22 S., R. 13 W.	
	From the cor. secs. 1, 2, 35, and 36, on the S. bdy. of the township, which is an iron post, 2 ins. diam., with brass cap, set, marked, and witnessed as described in the finished notes of the survey T. 23 S., R. 13 W., N. 0° 01' W. bet. secs. 35 and 36. Over rolling and broken hills through scattered undergrowth.
27.00	Rocky spur, 310 ft. above cor., projects NE.; descend gradual NW. slope of spur.

SUBDIVISION T. 22 S., R. 13 W.

Chains

40.00 On gradual NW. slope, near base of spur.  
 Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground to solid rock and 24 ins. in a mound of stone, for  $\frac{1}{4}$  sec. cor., with brass cap marked.



Deposit a limestone, 12 x 6 x 6 ins., at base of post, marked with a cross (X).


41.50 Base of descent from spur, 320 ft. below top, bears E. and S. 30° W.

43.90 Wash, 10 lks. wide, 1 ft. deep, course S. 80° E.

48.00 Base of spur, bears N. 20° E. and W.; thence ascend E. slope of spur.

75.00 Top of spur, 130 ft. above wash, projects NE.; descend gradual N. slope.

80.00 On gradual N. slope, 20 ft. below spur.  
 Set an iron post, 3 ft. long, 2 ins. diam., 12 ins. in the ground to solid rock and 24 ins. in a mound of stone, for cor. secs. 25, 26, 35 and 36, with brass cap marked.



Deposit a limestone, 7 x 3 x 2 ins., at base of post, marked with a cross (X).

Land, broken and rolling.

Soil, shallow rocky clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

S. 89°50' E., on random line bet. secs. 25 and 36.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

80.03 Intersect the E. bdy. of the township, 5 lks. N. of the

SUBDIVISION T. 22 S., R. 13 W.

Chains

Thence,

N. 89°48' W., on true line bet. secs. 25 and 36.

Over rolling and broken land through scattered undergrowth

- 15.00 Base of rocky spur, bears N. 20° E. and S. 20° W.
- 27.80 Top of rocky spur, 340 ft. above cor., projects S.;  
descend abrupt W. slope.
- 35.00 Ravine, 110 ft. below spur, drains S.; head 5 chains to  
the N.
- 40.015 On limestone surface rock, mark a cross (X), over which.  
Set an iron post, 3 ft. long, 1 in. diam., 36 ins. in  
a mound of stone, for  $\frac{1}{4}$  sec. cor., with brass cap  
marked.

S25  
 $\frac{1}{4}$  —————  
S36  
1925

- 45.10 Top of rocky spur, 120 ft. above ravine, projects S. 20°  
W.; descend gradual NW. slope.
- 59.00 Base of spur, bears N. and S.
- 66.80 Road at base of descent, 180 ft. below spur, bears S.  
and NW.
- 74.00 Base of spur, bears S. and NW.
- 80.03 The cor. secs. 25, 26, 35 and 36, 60 ft. above road.  
Land, rolling and broken, with a general southerly  
exposure and drainage.  
Soil, deep and shallow clay and sand loam; 3rd rate.  
Undergrowth, scattered sagebrush, shadscale, and mountain  
rush.  
No timber.  
Fair grazing.

N. 0°01' W., bet. secs. 25 and 26.


Descend gradually over broken N. slope of spur through  
scattered undergrowth.

- 5.00 Base of spur, 40 ft. below cor., bears E. and W.; thence  
over rolling land.
- 32.00 Road; bears NE. and S. 20° W.

SUBDIVISION T. 22 S., R. 13 W.

Chains

40.00 On rolling land.  
Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.




Raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, W. of cor.

59.50 Small rocky point, projects SE., 120 ft. above the  $\frac{1}{4}$  sec. cor.

80.00 On rocky NE. slope, 60 ft. below rocky point.

Set an iron post, 3 ft. long, 2 ins. diam., 16 ins. in the ground to solid rock and 20 ins. in a mound of stone, for cor. secs. 23, 24, 25 and 26, with brass cap marked.



Deposit a limestone, 6 x 5 x 2 ins., at base of post, marked with a cross (X).

Land, rolling and broken.

Soil, shallow and deep clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

S. 89°48' E, on random line bet. secs. 24 and 25.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

80.12 Intersect the E. bdy. of the township, 5 lks. S. of the cor. secs. 19, 24, 25 and 30.

Thence,

N. 89°50' W., on true line bet. secs. 24 and 25.

Over rolling bench land through scattered undergrowth.

40.06 On rolling E. slope, of surfacerock, mark a cross (X), over which.

Set an iron post, 3 ft. long, 1 in. diam., 36 ins. in a

## SUBDIVISION T. 22 S., R. 13 W.

## Chains

mound of stone, for  $\frac{1}{4}$  sec. cor., with brass cap marked

$$\begin{array}{r} S24 \\ \frac{1}{4} \\ \hline S25 \\ 1925 \end{array}$$

47.00 Road, bears N. and S.

89.12 The cor. secs. 23, 24, 25 and 26, 20 ft. above cor. on the E. bdy.

Land, rolling benches.

Soil, deep clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain-rush and yellow top.

No timber.

Fair grazing.

N. 0°01' W., bet. secs. 23 and 24.

Over rolling and broken land through scattered undergrowth

27.00 Base of spur, bears NE. and SW.

40.00 On gradual SE. slope of spur.

Set an iron post, 3 ft. long, 1 in. diam., 6 ins. in the ground to solid rock and 30 ins. in a mound of stone, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

$$\begin{array}{r} \frac{1}{4} \\ S23 \quad | \quad S24 \\ 1925 \end{array}$$

Deposit a limestone, 7 x 4 x 3 ins., at base of post, marked with a cross (X).

43.00 Top of rocky spur, 280 ft. above sec. cor., projects NE.; descend gradual NW. slope of spur.

57.30 Base of spur, bears NE. and S. 70° W.

79.60 Wash, 20 lks. wide, 1 ft. deep, course NE.

80.00 On rolling land, 160 ft. below spur.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. secs. 13, 14, 23 and 24, with brass cap marked.

SUBDIVISION T. 22 S., R. 13 W.

Chains

T22S	R13W
S14	S13
S23	S24
1925	

Raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.  
Land, rolling and broken.

Soil, deep and shallow clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain  
rush and yellow top.

No timber.

Fair grazing.

S. 89°50' E., on random line bet. secs. 13 and 24.

40.00 Set temp. ¼ sec. cor.

80.19 Intersect the E. bdy. of the township, 14 lks. S. of the  
cor. secs. 13, 18, 19 and 24.

Thence,

N. 89°56' W., on true line bet. secs. 13 and 24.

Over level land through scattered undergrowth.

40.095 On level land.

Set an iron post, 3 ft. long, 1 in. diam., 17 ins. in the  
ground, for ¼ sec. cor., with brass cap marked.

S13
¼ ———
S24

1925

Deposit a limestone, 4 x 3 x 2 ins., at base of post,  
marked with a cross (X).

42.70 Road, bears N. 30° W. and S. 30° E.

43.20 Wash, 30 lks. wide, 2 ft. deep, course S. 70° E.

58.70 Rocky spur, 50 ft. high, projects N. 30° E.

79.90 Same wash as last, course N. 80° E.

80.19 The cor. secs. 13, 14, 23 and 24.

Land, level and rolling.

Soil, deep clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain  
rush and yellow top.

No timber. Fair grazing.

## SUBDIVISION, T. 22 S., R. 13 W.

## Chains

N. 0°01' W., bet. secs. 13 and 14.

Over rolling bench land through scattered undergrowth.

18.20 Road, bears N. 70° W. and SE.

40.00 On rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

	$\frac{1}{4}$	
S14		S13

1925

Raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, W. of c

40.40 Wash, 30 lks. wide, 2 ft. deep, course E.

80.00 On rolling land.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. secs. 11, 12, 13 and 14, with brass cap marked.

T22S		R13W
S11		S12
S14		S13

1925

Raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, W. of c

Land, rolling.

Soil, deep clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

S. 89°56' E., on random line bet. secs. 12 and 13.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

80.16 Intersect the E. bdy. of the township, 3 lks. S. of the cor. secs. 7, 12, 13 and 18.

Thence,

N. 89°57' W., on true line bet. secs. 12 and 13.

Over rolling bench land through scattered undergrowth.

40.08 On rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the

SUBDIVISION, T. 22 S., R. 13 W.

Chains

$\frac{1}{4}$ 

S12
—
S13
1925

Raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.

80.16 The cor. secs. 11, 12, 13 and 14.

Land, rolling.

Soil, deep clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain  
rush and yellow top.

No timber.

Fair grazing.

N. 0°01' W., bet. secs. 11 and 12.

Over rolling land through scattered undergrowth.

40.00 On rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the  
ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

$\frac{1}{4}$ 

S11		S12
1925		

71.50 Raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.  
Wash drains NE.

80.00 On rolling land.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in  
the ground, for cor. secs. 1, 2, 11 and 12, with brass  
cap marked.

T22S	R13W
S2	S1
—	
S11	S12
1925	

Raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

Land, rolling.

Soil, deep clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain  
rush and yellow top.

No timber.

Fair grazing.

SUBDIVISION T. 22 S., R. 13 W.

Chains

S. 89°57' E., on random line bet. secs. 1 and 12.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

80.08 Intersect the E. bdy. of the township, 19 lks. N. of the  
cor. secs. 1, 6, 7 and 12.

Thence,

N. 39°49' W., on true line bet. secs. 1 and 12.

Over rolling land through scattered undergrowth.

40.04 On rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the  
ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

S1  
 $\frac{1}{4}$  ———  
S12

1925

Raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$  ft. high, N. of cor.

71.70 Wash, 40 lks. wide, 3 ft. deep, course NE.

80.08 The cor. secs. 1, 2, 11 and 12.

Land, rolling.

Soil, shallow and deep clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain  
rush and yellow top.

No timber.

Fair grazing.

N. 0°01' W., on random line bet. secs. 1 and 2.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

80.04 Intersect the E. bdy. of the township, 5 lks. W. of the  
cor. secs. 1, 2, 35 and 36.

Thence,

S. 0°01' W., bet. secs. 1 and 2 on true line.

Over rolling land through scattered undergrowth.

40.04 On rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the  
ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

$\frac{1}{4}$   
|  
S2 | S1

1925

SUBDIVISION, T. 22 S., R. 13 W.

Chains

Raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

80.04 The cor. secs. 1, 2, 11 and 12.

Land, rolling.

Soil, deep clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain  
rush and yellow top.

No timber

Fair grazing.


From the cor. secs. 2, 3, 34 and 35, on the S. bdy. of  
the township, which is an iron post, 2 ins. diam.,  
with brass cap, set, marked and witnessed as described  
in the official records of the survey T. 23 S., R. 13 W.  
N. 0°01' W., bet. secs. 34 and 35.

Ascend gradually over broken E. slope through scattered  
undergrowth.

27.00 Ravine, 100 ft. deep, drains E.

40.00 On broken E. slope.

Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the  
ground to solid rock and 26 ins. in a mound of stone,  
for ¼ sec. cor., with brass cap marked.



Deposit a limestone, 6 x 6 x 2 ins., at base of post,  
marked with a cross (X)

44.00 Limestone ledge, 200 ft. high, 610 ft. above sec. cor.,  
bears N. 20° E. and S. 20° W.; descend abrupt NW. slope.

68.00 Ravine, 280 ft. below ledge, heads 5.00 chs. W., drains  
E.; ascend abrupt S. slope.

78.60 Rocky spur, 80 ft. above ravine, projects N. 80° E.;  
descend abrupt NE. slope.

80.00 On abrupt NE. slope, 30 ft. below spur.

Set an iron post, 3 ft. long, 2 ins. diam., 10 ins. in  
the ground to solid rock and 26 ins. in a mound of  
stone, for cor. secs. 26, 27, 34 and 35, with brass

## SUBDIVISION T. 22 S., R. 13 W.

Chains

T22S	R13W
S27	S26
S34	S35

1925

Deposit a limestone, 12 x 10 x 10 ins., at base of post marked with a cross (X).

Land, broken, with a general southeasterly exposure and drainage.

Soil, shallow rocky clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

S. 89°50' E., on random line bet. secs. 26 and 35.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

80.17 Intersect the N. and S. line, 5 lks. N. of the cor. secs. 25, 26, 35 and 36.

Thence,

N. 89°48' W., on true line bet. secs. 26 and 35.

Over broken land through scattered undergrowth.

28.20 Road, bears N. 30° E. and S. 30° W.; thence ascend gradual SE. slope.

36.00 Base of rocky spur, bears N. 20° E. and S. 20° W.

40.085 On broken E. slope.

Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground to solid rock and 24 ins. in a mound of stone, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

S26
$\frac{1}{4}$
S35

1925

Deposit a limestone, 7 x 4 x 3 ins., at base of post, marked with a cross (X).

52.70 Top of rocky spur, projects SE.; continue ascent.

80.17 The cor. secs. 26, 27, 34 and 35, 570 ft. above base of ascent.

Land, broken, with a general easterly exposure and drainage.

SUBDIVISION T. 22 S., R. 13 W.

Soil, shallow rocky clay and sand loam; 3rd rate.  
 Undergrowth, scattered sagebrush, shadscale, mountain  
 rush and yellow top.  
 No timber..  
 Fair grazing.


N, 0°01' W., bet. secs. 26 and 27.

Ascend gradual E. slope of broken land through scattered  
 undergrowth.

17.80 Ridge, 100 ft. above cor., bears NE. and SW.; descend  
 gradual NW. slope.

40.00 On broken NW. slope.


Set an iron post, 3 ft. long, 1 in. diam., 6 ins. in the  
 ground to solid rock and 30 ins. in a mound of stone,  
 for  $\frac{1}{4}$  sec. cor., with brass cap marked.



Deposit a limestone, 6 x 6 x 2 ins., at base of post,  
 marked with a cross (X).

80.00 True point for the sec. cor. falls on edge of red ledge,  
 250 ft. below ridge, where it is impracticable to set  
 cor.; therefore at a point, S. 89°49' E., 12 lks.  
 dist., on true line bet. secs. 23 and 26.

Set an iron post, 3 ft. long, 2 ins. diam., 36 ins. in a  
 mound of stone, over a cross (X), marked on the  
 surfacerock, for witness cor. to the cor. secs. 22, 23,  
 26 and 27, with brass cap marked.



Land, broken, with a general northwesterly exposure and  
 drainage.

Soil, shallow rocky clay and sand loam; 3rd rate.  
 Undergrowth, scattered sagebrush, shadscale, mountain  
 rush and yellow top. No timber. Fair grazing.

SUBDIVISION T. 22 S., R. 13 W.

Chains

S. 89°48' E., on random line bet. secs. 23 and 26, from the true point for the cor. secs. 22, 23, 26 and 27.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

79.95 Intersect the N. and S. line, 3 lks. S. of the cor. sec. 23, 24, 25 and 26.

Thence,

N. 89°49' W., on true line bet. secs. 23 and 26.

Ascend abrupt E. slope of broken land through scattered undergrowth.

33.00 Ridge, 500 ft. above cor., bears N. 20° E. and S. 20° W.

39.975 On broken NW. slope.

Set an iron post, 3 ft. long, 1 in. diam., 14 ins. in the ground to solid rock and 22 ins. in a mound of stone, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

$$\begin{array}{r} S23 \\ \frac{1}{4} \text{ ---} \\ S26 \\ 1925 \end{array}$$

Deposit a limestone, 6 x 4 x 2 ins., at base of post, marked with a cross (X).

79.83 The witness cor. to the cor. secs. 22, 23, 26 and 27.

79.95 The true point for the cor. secs. 22, 23, 26 and 27, 140 ft. below ridge.

Land, broken, with a general southeasterly and northwest exposure and drainage.

Soil, shallow rocky clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

N. 0°01' W., bet. secs. 22 and 23, from the true point for the cor. secs. 22, 23, 26 and 27, which is N. 89°49' W. 12 lks. dist. from the witness cor. to said secs.

Descend abruptly over broken land through scattered undergrowth.

9.00 Base of ridge, 200 ft. below true point for cor., bears


SUBDIVISION T. 22 S. R. 13 W.

Chains

28.90 Wash, 40 lks. wide, 1 ft. deep, course NE.

38.90 Road, bears NE. and SW.

40.00 On rolling land, 190 ft. below true point for sec. cor.  
Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.




Raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$  ft. high, W. of cor.

50.60 Wash, 30 lks. wide, 2 ft. deep, course E.

76.00 base of spur, bears N. 20° E. and SW.

80.00 On gradual SE. slope, 40 ft. above the  $\frac{1}{4}$  sec. cor.

Set an iron post, 3 ft. long, 2 ins. diam., 10 ins. in the ground to solid rock and 26 ins. in a mound of stone, for cor. secs. 14, 15, 22 and 23, with brass cap marked



Deposit a limestone, 8 x 6 x 4 ins., at base of post, marked with a cross (X).

Land, rolling with a general easterly exposure and drainage.

Soil, deep and shallow clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, chadscale, mountain rush and yellow top.

No timber.

Fair grazing.

S. 89°49' E., on random line bet. sec. 14 and 23.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

79.89 Intersect the N. and S. line, 3 lks. S. of the cor. secs. 13, 14, 23 and 24.

Thence,

N. 89°50' W., on true line bet. secs. 14 and 23.

Over rolling land through scattered undergrowth.

## SUBDIVISION T. 22 S., R. 13 W.

## Chains

22.70 Base of spur, bears NE. and SW.

27.80 Rocky spur, 240 ft. above cor., projects N. 30° E.

39.945 On broken W. slope.

Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground to solid rock and 24 ins. in a mound of stone, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

$$\frac{1}{4} \frac{S14}{S23}$$

1925

Deposit a limestone, 12 x 8 x 7 ins., at base of post, marked with a cross (X).

43.00 Base of spur, bears NE. and S.

50.00 Wash, 40 lks. wide, 3 ft. deep, 170 ft. below spur, course NE.; ascend gradual SE. slope.

64.00 Road, bears N. 20° E. and SW.

73.00 Base of spur, bears NE. and SW.

79.89 The cor. secs. 14, 15, 22 and 23, 30 ft. above wash.

Land, rolling, with a general northeasterly exposure and drainage.

Soil, deep clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

N. 0°01' W., bet. secs. 14 and 15.

Ascend gradually over broken SE. slope of spur through scattered undergrowth.

15.00 Top of spur, 140 ft. above cor., projects NE.; descend abrupt NW. slope.

30.00 Ravine, 120 ft. below spur, drains E.; ascend abrupt S. slope.

36.60 Rocky spur, 180 ft. above ravine, projects S. 80° E.; descend abrupt N. slope.

40.00 On abrupt N. slope,

Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the

## SUBDIVISION T. 22 S., R. 13 W.

Stations

for  $\frac{1}{4}$  sec. cor., with brass cap marked.

$\frac{1}{4}$   
 S15 | S14  
 1925

Deposit a limestone, 6 x 6 x 2 ins., at base of post, marked with a cross (X).

- 50.00 Base of rocky spur, bears N. 70° W. and S. 70° E.
- 68.70 Wash, 35 lks. wide, 2 ft. deep, 160 ft. below spur, course E.; ascend gradual S. slope.
- 75.00 Base of spur, bears E. and W.
- 80.00 On gradual S. slope, 70 ft. above wash.

Set an iron post, 3 ft. long, 2 ins. diam., 12 ins. in the ground to solid rock and 24 ins. in a mound of stone, for cor. secs. 10, 11, 14 and 15, with brass cap marked.

T22S	R13W
S10	S11
S15	S14

  
 1925

Deposit a limestone, 6 x 5 x 2 ins., at base of post, marked with a cross (X).

Land, rolling and broken, with a general easterly exposure and drainage.

Soil, deep and shallow clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, mountain rush, shadscale and yellow top.

No timber.

Fair grazing.

S. 89°50' E., on random line bet. secs. 11 and 14.

- 40.00 Set temp.  $\frac{1}{4}$  sec. cor.
- 79.81 Intersect the N. and S. line, 16 lks. S. of the cor. secs. 11, 12, 13 and 14.

Thence,

N. 89°57' W., on true line bet. secs. 11 and 14.

Over rolling land through scattered undergrowth.

Chains

39.905 On rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

$\frac{1}{4}$   $\frac{S11}{S14}$

1925

51.50 Raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$  ft. high, N. of Road, bears N. 20° W. and S. 20° E.

54.80 Base of spur, bears N. and S.; thence along S. slope of spur near top.

79.81 The cor. secs. 10, 11, 14 and 15.

Land, rolling.

Soil, deep clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

N. 0°01' W., bet. secs. 10 and 11.

Ascend abrupt S. slope of spur through scattered undergrowth.

1.10 Top of spur, 10 ft. above cor., projects E.; descend gradual N. slope.

39.70 Road, 60 ft. below spur, bears N. 70° W. and S. 70° E.

40.00 On rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

$\frac{1}{4}$   $\frac{S10}{S11}$

1925

Deposit a limestone, 6 x 6 x 4 ins., at base of post, marked with a cross (X). No other suitable accessories available and soil too loose for pits.

49.00 Wash, 40 lbs. wide, 3 ft. deep, course E.

50.00 On rocky NE. slope.

Set an iron post, 3 ft. long, 2 ins. diam., 12 ins. in the ground to solid rock and set iron...

## SUBDIVISION T. 22 S., R. 13 W.

for cor. secs. 2, 3, 10 and 11, with brass cap marked.

T22S	R13W
S3	S2
S10	S11

1925

Deposit a limestone, 5 x 4 x 4 ins., at base of post, marked with a cross (X).

Land, rolling and broken, with a general easterly exposure and drainage.

Soil, shallow and deep rocky clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

S.  $89^{\circ}57'$  E., on random line bet. secs. 2 and 11.

40.00 Set temp. & sec. cor.

79.89 Intersect the cor. secs. 1, 2, 11 and 12.

Thence,

N.  $89^{\circ}57'$  W., on true line bet. secs. 2 and 11.

Over rolling land through scattered undergrowth.

39.945 On rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

$\frac{1}{4}$	S2
	S11

1925

Raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, N. of cor.

56.00 Road, bears N. and S.

79.89 The cor. secs. 2, 3, 10 and 11.

Land, rolling.

Soil, deep clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

## SUBDIVISION T. 22 S., R. 13 W.

Chains	
	N. 0°01' E., on random line bet. secs. 2 and 3.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
80.15	Intersect the N. bdy. of the township, 14 lks. E. of the cor. secs. 2, 3, 34 and 35.
	Thence,
	S. 0°05' E., on true line bet. secs. 2 and 3.
	Ascend broken N. slope of spur through scattered undergrowth.
12.00	Spur, 100 ft. above cor., projects E.; descend abrupt S. slope.
25.00	Base of spur, bears E. and W.
33.20	Wash, 40 lks. wide, 3 ft. deep, 250 ft. below spur, course E.
40.15	On rolling land.
	Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked.
	$\frac{1}{4}$
	S3   S2
	1925
	Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
77.40	Rocky spur, 60 ft. high, projects E., 5.00 chs. dist.
80.15	The cor. secs. 2, 3, 10 and 11,
	Land, broken and rolling, with a general easterly exposure and drainage.
	Soil, deep clay and sand loam; 3rd rate.
	Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.
	No timber.
	Fair grazing.

-33-  
 SUBDIVISION T. 22 S., R. 13 W.

chains


From the cor. secs. 3, 4, 33 and 34, on the S. bdy. of the township, which is an iron post, 2 ins. diam., with brass cap, set, marked, and witnessed as described in the official records of the survey of T. 23 S., R. 13 W. N. 0° 02' W., bet. secs. 33 and 34.

Ascend gradual broken S. slope through scattered undergrowth.

4.00 Ridge, 60 ft. above cor. bears E. and S, 70° W.; descend along gradual broken N.E. slope.

34.60 Wash, 30 lks. wide, 3 ft. deep, 60 ft. below ridge, course NE.; ascend gradual S.E. slope.

40.00 On surface rock, at the top of spur, projecting N. 20° E., 40 ft. above wash, mark a cross (A), and over which set an iron post, 3 ft. long, 1 in. diam., 36 ins. in a mound of stone, for a sec. cor., with brass cap marked




Thence descend gradually along broken E. slope.

77.00 Rocky spur, 180 ft. below the a sec. cor., project N. 30° E.; descend abrupt NW. slope.

80.00 True point for the cor. secs. 27, 28, 33 and 34, falls on broken face of ledge, 60 ft. below spur, where it is impracticable to set cor.; therefore at a point, S. 89° 49' E., 10 lks. dist. from true cor. point, on true line bet. secs. 27 and 34, on surface rock, mark a cross (X), and over which

Set an iron post, 3 ft. long, 2 ins. diam., 36 ins. in a mound of stone, for witness cor. to the cor. secs. 27, 28, 33 and 34, with brass cap marked

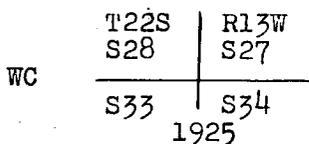

Land, broken, with a general easterly exposure and drainage.

Soil, shallow rocky clay and sandy loam; 3rd rate.

- 34  
SUBDIVISION T. 22 S. R. 13 W.

chains	<p>Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.</p> <p>No timber.</p> <p>Fair grazing.</p>
	<p>From the true point for the cor. secs. 27, 28, 33 and 34, S. 89° 50' E., on random line bet. secs. 27 and 34.</p>
40.00	Set temp. $\frac{1}{4}$ sec. cor.
80.19	Intersect the N. and S. line, 3 lks. N. of the cor. Secs. 26, 27, 34 and 35.
	<p>Thence</p> <p>N. 89° 49' W. on true line bet. secs. 27 and 34.</p> <p>Ascend abruptly over broken SE. slope of ridge through scattered undergrowth.</p>
8.10	Ridge, 30 ft. above cor., bears N. 30° E. and S. 30° W.; descend abrupt broken W. slope.
40.095	<p>On broken NW slope</p> <p>Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground to solid rock and 24 ins. in a mound of stone for <math>\frac{1}{4}</math> sec. cor., with brass cap marked,</p> $\frac{1}{4} \begin{array}{r} \text{S } 27 \\ \hline \text{S } 34 \\ 1925 \end{array}$ <p>Deposit a limestone, 5x4x3 ins., at base of post, marked with a cross (X).</p>
75.00	Ravine, 290 ft. below ridge, drains N., 5.00 chs. dist. to junction with main ravine; ascend abrupt E. slope.
79.00	Spur, 40 ft. above ravine, projects N. 20° E.
80.09	The witness cor. to the cor. secs. 27, 28, 33 and 34.
80.19	<p>The true point for the cor. secs. 27, 28, 33 and 34, 60 ft. below spur.</p> <p>Land, broken, with a general northwesterly exposure and drainage.</p> <p>Soil, shallow rocky clay and sandy loam; 3rd. rate.</p> <p>Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.</p> <p>No timber. Fair grazing.</p>


SUBDIVISION T. 22 S. R. 13 W.

From the true point for the cor. secs. 27, 28, 33 and 34, which is N. 89°49' W., 10 lks. dist. from the witness cor. to said secs.,

N. 0°02' W., bet. secs. 27 and 28.

Descend abruptly over broken NW. slope of spur, through scattered undergrowth.

- 2.50 Road in ravine, 30 ft. below cor. point, Ravine drains NE.; road, bears NE. and SW.; ascend gradually over broken E. slope.
- 15.80 Rocky spur, 70 ft. above ravine, projects E.; descend abrupt N. slope.
- 22.00 Ravine, 140 ft. below spur, drains E., 6.00 chs. to main ravine; ascend abruptly over broken ledges.
- 26.50 Top of limestone ledges, 150 ft. above ravine, bears N. 80° E. and S. 80° W.; thence over broken top of mesa.
- 40.00 On broken top of mesa, 80 ft. above top of ledges. Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground to solid rock and 24 ins. in a mound of stone, for  $\frac{1}{4}$  sec. cor., with brass cap marked.



Deposit a red sandstone, 8 x 3 x 2 ins., at base of post, marked with a cross (X).

- 50.00 Descend abruptly over ledges from top of mesa, bears E. and W.
- 55.60 Bottom of rocky gulch, 130 ft. deep, drains E.; ascend abrupt S. slope over ledges to top of mesa.
- 62.50 Enter top of mesa, bears E. and W.
- 68.00 Leave top of mesa, bears E. and W.; descend abrupt N. slope.
- 71.10 Bottom of gulch, 130 ft. below mesa, drains N. 20° E.; ascend abrupt S. slope.
- 76.80 Rocky point, projects E., 210 ft. above gulch.
- 79.30 Small ravine, 70 ft. below point, drains S. 80° E.
- 80.00 On abrupt S. slope, 50 ft. above ravine.

## SUBDIVISION T. 22 S., R. 13 W.

## Chains

Set an iron post, 3 ft. long, 2 ins. diam., 10 ins. in the ground to solid rock and 26 ins. in a mound of stone, for cor. secs. 21, 22, 27 and 28, with brass cap marks.

T22S	R13W
S21	S22
S28	S27

1925

Deposit a limestone, 6 x 4 x 2 ins., at base of post, marked with a cross (X).

Land, broken, with a general easterly exposure and drainage.

Soil, shallow rocky clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

S. 89°49' E., on random line bet. secs. 22 and 27.

40.00 Set temp. 4 sec. cor.

80.20 Intersect the N. and S. line, 3 lks. N. of the true point for the cor. secs. 22, 23, 26 and 27, which is N. 89°49' W., 12 lks. dist. from the witness cor. to said secs.

Thence,

From the true point for sec. cor.,

N. 89°48' W., on true line bet. secs. 22 and 27.

Descend gradually over broken NW. slope through scattered undergrowth.

10.00 Base of ridge, bears NE. and SW.

19.00 Wash, 30 lks. wide, 3 ft. deep, 220 ft. below cor. point, course N. 70° E.; ascend abrupt SE. slope of mesa.

23.90 Road, bears NE. and SW.

35.00 Base of abrupt ascent over ledges, bears NE. and SW.

39.20 Top of ledge, bears NE. and SW.; thence over broken top of mesa.

40.10 On broken top of mesa on surface rock, 330 ft. above wash

SUBDIVISION T. 22 S., R. 13 W.

Chains

mark a cross (X), and over which

Set an iron post, 3 ft. long, 1 in. diam., 36 ins. in a mound of stone, for  $\frac{1}{4}$  sec. cor., with brass cap marked

S22  
 $\frac{1}{4}$  ———  
 S27

1925

51.20 Leave top of mesa, bears NE. and SW.; descend abrupt NW. slope.

63.50 Gulch, 210 ft. below mesa, drains S. 70° W.; high limestone ledges on each side of gulch; ascend gradually over broken S. slope.

80.20 The cor. secs. 21, 22, 27 and 28, 150 ft. above gulch. Land, broken, with a general southeasterly exposure and drainage.

Soil, shallow rocky clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

N. 0°02' W., bet. secs. 21 and 22.

Ascend abrupt S. slope of broken land through scattered undergrowth.

8.00 Top of rocky point, 140 ft. above cor., projects N. 70° E.; descend abrupt N. slope.

17.60 Bottom of gulch, 260 ft. below point, drains S. 60° E.; broken ledges on each side of gulch; ascend abrupt SW. slope.

40.00 On surfacerock of spur, 220 ft. above gulch, projects SE.; mark a cross (X), over which.

Set an iron post, 3 ft. long, 1 in. diam., 36 ins. in a mound of stone, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

$\frac{1}{4}$   
 S21 | S22

1925

Thence descend abrupt NE. slope.

## SUBDIVISION T. 22 S., R. 13 W.

Chains

69.00 Ravine, 180 ft. below spur, drains S. 60° E.; ascend abrupt SW. slope.

80.00 On top of spur, projecting S. 80° E., 120 ft. above ravine  
Set an iron post, 3 ft. long, 2 ins. diam., 3 ins. in the ground to solid rock and 28 ins. in a mound of stone, for cor. secs. 15, 16, 21 and 22, with brass cap marked

T22S	R13W
S16	S15
S21	S22

1925

Deposit a limestone, 7 x 5 x 3 ins., at base of post, marked with a cross (X).

Land, broken, with a general southeasterly exposure and drainage.

Soil, shallow rocky clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

S. 89°48' E., on random line bet. secs. 15 and 22.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

80.29 Intersect the cor. secs. 14, 15, 22 and 23.

Thence,

N. 89°48' W., on true line bet. secs. 15 and 22.

ascend abruptly over broken SE. slope through scattered undergrowth.

10.90 Top of broken ledges, 290 ft. above cor., bears NE. and SW.; thence descend gradually over broken SW. slope of mesa.

40.145 On rolling mesa land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

S15

 $\frac{1}{4}$ 

S22

1925


## SUBDIVISION T. 22 S., R. 13 W.

Chains	
60.00	Ravine, 60 ft. below top of ledge, drains SE.; ascend gradual NE. slope.
80.29	<p>The cor. secs. 15, 16, 21 and 22, 60 ft. above ravine. Land, broken, with a general southeasterly exposure and drainage.</p> <p>Soil, shallow rocky clay and sand loam; 3rd rate.</p> <p>Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.</p> <p>No timber.</p> <p>Fair grazing.</p>
	<p>N. 0°02' W., bet. secs. 15 and 16.</p> <p>Ascend gradually over broken E. slope through scattered undergrowth.</p>
25.00	Spur, 60 ft. above cor., projects N. 70° E.; descend abrupt NW. slope.
40.00	<p>On broken abrupt NW. slope.</p> <p>Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground to solid rock and 24 ins. in a mound of stone, for <math>\frac{1}{4}</math> sec. cor., with brass cap marked.</p>
	<p style="text-align: center;"> <math>\frac{1}{4}</math>            S16   S15            1925         </p>
	Deposit a lava stone, 10 x 5 x 2 ins., at base of post, marked with a cross (X).
48.00	Ravine, 250 ft. below spur, drains E.; ascend abrupt S. slope.
54.80	Spur, 190 ft. above ravine, projects N. 70° E.; descend abrupt N. slope.
66.20	Ravine, 180 ft. below spur, heads 3.00 chs. W.; drains E.; ascend abrupt S. slope.
78.80	Spur, 90 ft. above ravine, projects N. 70° E.; descend abrupt N. slope.
80.00	<p>On broken N. slope, 30 ft. below spur.</p> <p>Set an iron post, 3 ft. long, 2 ins. diam., 12 ins. in the ground, for cor. secs. 9, 10, 15 and 16, with brass</p>

SUBDIVISION T. 22 S., R. 13 W.

Chains

cap marked.



Deposit a lava stone, 8 x 6 x 4 ins., at base of post, marked with a cross (X).

Land, broken, with a general easterly exposure and drainage.

Soil, shallow rocky clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

S. 89°48' E., on random line bet. secs. 10 and 15.

48.00 Set tem. & sec. cor.

52.15 Intersect the N. and S. line, 3 lks. S. of the cor. secs. 10, 11, 14 and 15.

Thence,


N. 89°49' W., on true line bet. secs. 10 and 15.

Ascend gradually along broken top of spur through scattered undergrowth.

22.80 Leave top of spur, 110 ft. above cor.; descend abruptly over broken NW. slope of spur.

40.125 On broken NW. slope,

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/4 sec. cor., with brass cap marked.



Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor.

43.00 Ravine, 140 ft. below spur, drains NE.; ascend abrupt broken SE. slope.

62.50 Rocky spur, 250 ft. above ravine, projects NE.; descend abrupt NW. slope.

SUBDIVISION T. 22 S. R. 13 W.

Chains

80.25 The cor. secs. 9, 10, 15 and 16, 40 ft. below spur.  
 Land, broken, with a general northeasterly exposure and drainage.  
 Soil, shallow rocky clay and sand loam; 3rd rate.  
 Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.  
 No timber.  
 Fair grazing.

N. 0°02' W., bet. secs. 9 and 10.


Descend gradually over broken NW. slope of spur through scattered undergrowth.

22.20 Base of spur, bears N. 80° E. and S. 80° W.

31.10 Road, bears N. 80° E. and S. 80° W. also wash, drains NE.

40.00 On rolling land, 350 ft. below sec. cor.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.



Raise a mound of stone, 3 ft. base, 1 ft. high, W. of cor.

51.40 Road, bears W. and S. 60° E.


52.90 Wash, 15 lks. wide, 2 ft. deep, course E.

60.00 Base of spur, bears E. and W.

78.00 Top of spur, 200 ft. above the sec. cor., projects E.; descend abrupt N. slope.

80.00 On abrupt N. slope of spur, 30 ft. below top.

Set an iron post, 3 ft. long, 2 ins. diam., 12 ins. in the ground to solid rock and 24 ins. in a mound of stone, for cor. secs. 3, 4, 9 and 10, with brass cap marked.



Deposit a lava stone, 6 x 6 x 6 ins., at base of post, marked with a cross (X).

SUBDIVISION T. 22 S., R. 13 W.

Chains

Land, rolling and broken, with a general easterly exposure and drainage.

Soil, shallow and deep clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

- 3. 89°49' E., on random line bet. secs. 3 and 10.
- 40.00 Set temp. & sec. cor.
- 70.28 Intersect the N. and S. line, 3 lks. N. of the cor. secs. 2, 3, 10 and 11.
- Thence,
- 1. 89°49' W., on true line bet. secs. 3 and 10.
- Ascend abruptly over broken S. slope of spur through scattered undergrowth.
- 15.30 Top of spur, 80 ft. above cor., projects N. 80° E.; continue gradual ascent on broken N. slope of spur near top.
- 40.14 On broken N. slope of spur.
- Set an iron post, 3 ft. long, 1 in. diam., 16 ins. in the ground to solid rock and 20 ins. in a mound of stone, for a sec. cor., with brass cap marked.

S3  
 1/4 —————  
 S10  
 1925

- Deposit a lava stone, 8 x 6 x 4 ins., at base of post, marked with a cross (X).
- 65.80 Top of same spur, 300 ft. above 15.30 chs. point, projects S. 80° E. from the W.; thence along top of spur.
- 77.80 Leave top of spur, projects E. from S. 80° W.
- 80.28 The cor. secs. 3, 4, 9 and 10, 180 ft. below spur.
- Land, broken with a general northerly and southerly exposure and drainage.
- Soil, shallow rocky clay and sand loam; 3rd rate.
- Undergrowth, scattered sagebrush, shadscale, mountain

## SUBDIVISION T. 22 S., R. 13 W.

Chains

rush and yellow top.

No timber.

Fair grazing.

N. 0°06' W., on random line bet. secs. 3 and 4.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

80.03 Intersect the N. bdy. of the township, 30 lks. W. of the  
cor. secs. 3, 4, 33 and 34.

Thence,

S. 0°07' W., on true line bet. secs. 3 and 4.

Ascend gradual N. slope of rolling land through scattered  
undergrowth.

5.80 Wash, 40 lks. wide, 2 ft. deep, course S. 80° E.

8.00 Base of spur, bears E. and W.

15.50 The E. point of spur, 120 ft. above cor.; descend abrupt  
SE. slope.

22.60 Base of spur, bears E. and W.

40.03 On rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the  
ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

$\frac{1}{4}$   
S4 | S3  
1925

Raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$  ft. high, W. of cor.

51.00 Base of descent and base of ascent over N. slope of spur,  
100 ft. below point of spur, bears E. and W.

80.03 The cor. secs. 3, 4, 9 and 10, 70 ft. above base of spur.  
Land, rolling and broken, with a general northeasterly  
exposure and drainage.

Soil, shallow and deep clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain  
rush and yellow top.

No timber.

Fair grazing.

SUBDIVISION T. 22 S., R. 13 W.

Chains


From the cor. secs. 4, 5, 32 and 33, on the S. bdy. of township, which is an iron post, 2 ins. diam., with brass cap, set, marked and witnessed as described in the official records of the survey T. 23 S., R. 13 W. N. 0°03' W., bet. secs. 32 and 33. Over rolling land.

17.50 Road in bottom of ravine, 150 ft. below cor.; road bears NE. and S. 70° W.; ravine drains S. 70° W.; ascend gradual SW. slope.

2.0 Ridge, 100 ft. above ravine, bears E. 70° W. and SE.; descend gradual NE. slope.

40.00 n r lling land.

at an iron post, 3 ft. long, 1 in. diam., 24 ins. in the ground to solid rock and 12 ins. in a mound of stone, for 4 sec. cor., with brass cap marked.




Deposit a limestone, 10 x 6 x 4 ins., at base of post, marked with a cross (X).

20.0 Road, bears N. 28° W. and SE.

4.0 n r lling land, 150 ft. above the 4 sec. cor.

at an iron post, 3 ft. long, 2 ins. diam., 12 ins. in the ground to solid rock and 24 ins. in a mound of stone, for cor. secs. 28, 29, 32 and 33, with brass cap marked.



Deposit a limestone, 6 x 6 x 2 ins., at base of post, marked with a cross (X).

land, rolling, with a general northeasterly and southwest exposure and drainage.

soil, shallow rocky clay and sand loam; 3rd rate.

intergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

SUBDIVISION T. 22 S., R. 13 W.

Chains

S. 89°50' E., on random line bet. secs. 28 and 33.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

79.92 Intersect the N. and S. line, 14 lks. S. of the true point for the cor. secs. 27, 28, 33 and 34, which is N. 89°49' W., 10 lks. dist. from the witness cor. to said secs.

Thence.

From the true point for sec. cor.,

N. 89°56' W., on true line bet. secs. 28 and 33.

Ascend abrupt E. slope of broken land through scattered undergrowth.

11.30 Rocky spur, 150 ft. above cor., projects N. from main ridge 10 chs.; descend abrupt W. slope.

16.10 Road, bears NE. and SW.

16.73 Ravine, 110 ft. below spur, drains NE.

18.20 Same ravine, drains SE.; road in ravine bears SE. and NW.

21.80 Same ravine, drains NE.; road in ravine bears NE. and SW.

39.96 On rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 14 ins. in the ground to solid rock and 22 ins. in a mound of stone, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

S28  
 $\frac{1}{4}$  ———  
S33

1925

Deposit a lava stone, 12 x 8 x 5 ins., at base of post, marked with a cross (X)

79.92 The cor. secs. 28, 29, 32 and 33, 230 ft. above ravine. Land, rolling and broken with a general easterly exposure and drainage.

Soil, shallow rocky clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

## SUBDIVISION T. 22 S., R. 13 W.

## Chains

N. 0°03' W.; bet. secs. 28 and 29.

Ascend gradually over rolling land through scattered undergrowth.

21.20 Road, bears NE. and S. 20° W:

26.00 Spur, 100 ft. above cor., projects NE.; descend gradual NW. slope.

40.00 On gradual NW. slope.

Set an iron post; 3 ft. long, 1 in. diam., 8 ins. in the ground to solid rock and 28 ins. in a mound of stone, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

	↑	
S29		S28
	↓	
	1925	

Deposit a limestone, 5 x 4 x 2 ins., at base of post, marked with a cross (X).

46.10 Ravine, 140 ft. below spur; drains NE.; heads about 10.00 chains SW.; ascend abrupt SE. slope.

51.90 Rocky spur, 120 ft. above ravine, projects E., 7.00 chs. dist.; descend abrupt N. slope.

63.60 Ravine, 140 ft. below spur, drains N. 60° E.; ascend abrupt SE. slope.

68.00 Rocky spur, 60 ft. above ravine, projects E.; descend gradual N. slope.

80.00 On gradual N. slope, 40 ft. below spur.

Set an iron post, 3 ft. long, 2 ins. diam., 10 ins. in the ground to solid rock and 26 ins. in a mound of stone, for cor. secs. 20, 21, 28 and 29, with brass cap marked.

T22S		R13W
S20		S21
-----		
S29		S28

1925

Deposit a limestone, 4 x 4 x 2 ins., at base of post, marked with a cross (X).

Land, broken, with a general northeasterly exposure and drainage.

Soil, shallow rocky clay and sand loam; 3rd rate.

## SUBDIVISION, T. 22 S., R. 13 W.

## Chains

Undergrowth, scattered sagebrush, shadscale, mountain  
rush and yellow top.

No timber.

Fair grazing.

S. 89°56' E., on random line bet. secs. 21 and 28.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

79.97 Intersect the N. and S. line, 5 lks. N. of the cor. secs.  
21, 22, 27 and 28.

Thence,

N. 89°54' W., on true line bet. secs. 21 and 28.

Descend abrupt SW. slope of mesa through scattered  
undergrowth.

3.80 Ravine, 40 ft. below cor., drains S. 70° E.; ascend  
gradually along S. slope of mesa.

20.80 Top of descent from mesa, 130 ft. above ravine, bears  
N. and S.; descend abrupt W. slope.

30.00 Ravine, 110 ft. below mesa, drains S. 20° E.; ascend  
abrupt E. slope.

39.985 On abrupt E. slope.

Set an iron post, 3 ft. long, 1 in. diam., 16 ins. in the  
ground to solid rock and 20 ins. in a mound of stone,  
for  $\frac{1}{4}$  sec. cor., with brass cap marked.

$$\begin{array}{r} S21 \\ \frac{1}{4} \\ \hline S28 \\ 1925 \end{array}$$

Deposit a limestone, 7 x 4 x 3 ins., at base of post,  
marked with a cross (X).

42.00 Rocky spur, 200 ft. above ravine, projects S.; descend  
abrupt W. slope.

64.00 Ravine, 170 ft. below spur, drains SE.; ascend gradual  
NE. slope.

65.50 Road, bears N. 70° W. and S. 50° E.

79.97 The cor. secs. 20, 21, 28 and 29, 40 ft. above ravine.  
Land, broken, with a general southeasterly exposure and  
drainage.

SUBDIVISION T. 22 S., R. 13 W.

Chains


Soil, shallow rocky clay and sand loam; 3rd rate.  
 Undergrowth, scattered sagebrush, shadscale, mountain  
 rush and yellow top.  
 No timber.  
 Fair grazing.

N. 0°03' W., bet. secs. 20 and 21.

Over rolling land through scattered undergrowth.

- 2.30 Road, bears S. 60° E. and N. 60° W.
- 3.40 Ravine, 30 ft. below cor., drains S. 60° E.; ascend  
 gradual SW. slope.
- 30.00 Spur, 180 ft. above ravine, projects E.; thence over  
 rolling land.
- 49.00 On rolling land.


Set an iron post, 3 ft. long, 1 in. diam., 16 ins. in the  
 ground to bedrock and 20 ins. in a mound of stone,  
 for  $\frac{1}{4}$  sec. cor., with brass cap marked.



Deposit a limestone, 7 x 4 x 3 ins., at base of post,  
 marked with a cross (X).

- 50.00 Wash, 15 lks. wide, 1 ft. deep, drains E.
- 57.80 Road, bears NE. and SW.
- 61.90 Rocky spur, 40 ft. high, projects N. 60° E.
- 65.90 Road, bears SE. and N. 70° W.
- 80.00 On rolling land, 100 ft. below spur.

Set an iron post, 3 ft. long, 2 ins. diam., 16 ins. in  
 the ground to solid rock and 20 ins. in a mound of  
 stone, for cor. secs. 16, 17, 20 and 21, with brass  
 cap marked.



From which,

## SUBDIVISION, T. 22 S., R. 13 W.

Chains

A juniper, 6 ins. diam., bears S. 7°30' E., 322 lks. dist., marked BT.

A juniper, 4 ins. diam., bears N. 37° W., 143 lks. dist., marked BT.

Trees too scrubby for other marks and no other bearing trees available.

Land, rolling, with a general easterly exposure and drainage.

Soil, shallow and deep clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

Timber, a few scattered scrub juniper on E. portion of mile.

Fair grazing.

S. 89°54' E., on random line bet. secs. 16 and 21.

40.00 Set temp. & sec. cor.

80.06 Intersect the N. and S. line, 12 lks. S. of the cor. secs. 15, 16, 21 and 22.

Thence,

N. 89°59' W., on true line bet. secs. 16 and 21.

Descend gradual SW. slope of rolling land through scattered undergrowth.

15.00 Draw, 50 ft. below cor., drains S. 30° E.; ascend gradual NE. slope.

25.50 The NE. point of rocky spur, 100 ft. above draw; descend gradual NW. slope.

32.20 Same draw as last, 90 ft. below point of spur; course NE.; ascend gradual NE. slope.

40.03 On N. point of spur, 80 ft. above draw.

Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground to bedrock and 26 ins. in a mound of stone, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

S16  
+-----  
S21

## SUBDIVISION T. 22 S., R. 13 W.

## Chains

Deposit a limestone, 6 x 4 x 2 ins., at base of post,  
marked with a cross (X).

Thence descend gradual NW. slope.

30.06 The cor. secs. 16, 17, 20 and 21, 140 ft. below the  $\frac{1}{4}$  s  
cor.

Land, rolling and broken, with a general northerly  
exposure and drainage.

Soil, shallow rocky clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain  
rush and yellow top.

No timber.

Fair grazing.

N. 0°03' W., bet. secs. 16 and 17.

Descend gradually over rolling land through scattered  
undergrowth.

27.00 Ravine, 30 ft. deep, drains NE.

33.80 The E. point of spur, 40 ft. high.

36.80 Ravine, 210 ft. below cor., drains NE.; road in bottom  
of ravine, bears NE. and SW.; ascend abrupt S. slope.

40.00 On abrupt S. slope.

Set an iron post, 3 ft. long, 1 in. diam., 16 ins. in the  
ground to solid rock and 20 ins. in a mound of stone,  
for  $\frac{1}{4}$  sec. cor., with brass cap marked.

$\frac{1}{4}$   
 S17 | S16  
 1925


Deposit a limestone, 6 x 4 x 2 ins., at base of post,  
marked with a cross (X).

44.60 Top of spur, 220 ft. above ravine, projects NE.; descend  
gradually over broken E. slope.

50.00 On broken E. slope, 180 ft. below spur.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the  
ground, for cor. secs. 8, 9, 16 and 17, with brass  
cap marked.

SUBDIVISION T. 22 S., R. 13 W.



Raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.  
 Land, broken and rolling with a general northeasterly  
 exposure and drainage.

Soil, shallow rocky clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shade oak, mountain  
 rush and yellow top.

No timber.

Fair grazing.

S. 89°59' E., on random line bet. secs. 9 and 16.

40.00 Set temp. 4 sec. cor.

80.15 Intersect the N. and S. line, 7 lbs. S. of the cor. secs.  
 9, 10, 15 and 16.

Thence,


N. 89°56' W., on true line bet. secs. 9 and 16.

Over rolling land through scattered undergrowth.

36.50 Road, bears NE. and SW.

40.075 True point for the 4 sec. cor. falls in bottom of wash,  
 300 ft. below sec. cor., draining NE., where it is  
 impracticable to set a permanent cor.

40.625 Set an iron post, 3 ft. long, 1 in. diam., 37 ins. in the  
 ground, for witness cor. to the sec. cor., with brass  
 cap marked.



Raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.

80.15 The cor. secs. 8, 9, 16 and 17, 160 ft. above wash.

Land, rolling, with a general northeasterly exposure and  
 drainage.

Soil, deep and shallow clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shade oak, mountain  
 rush and yellow top.

## SUBDIVISION T. 22 S., R. 13 W.

## Chains

N. 0°03' W., bet. secs. 8 and 9.

Ascend gradual S. slope of broken spur through scattered undergrowth.

7.00 Rocky spur, 30 ft. above cor., projects E.; descend abrupt N. slope.

22.00 Ravine, 120 ft. below spur, drains E.; heads about 10.00 chs. to the W.; ascend gradual S. slope.

35.00 Spur, 60 ft. above ravine, projects E.; descend gradual N. slope.

40.00 On gradual N. slope.

Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground to solid rock and 16 ins. in a mound of stone, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

	$\frac{1}{4}$	
S8		S9
1925		

Deposit a limestone, 6 x 6 x 4 ins., at base of post, marked with a cross (X).

80.00 On gradual N. slope, 50 ft. below spur.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. secs. 4, 5, 8 and 9, with brass cap marked.

T22S		R13W
S5		S4
-----		
S8		S9

1925

Raise a mound of stone 3 ft. base  $1\frac{1}{2}$  ft. high W. of cor. Land, rolling, with a general easterly exposure and drainage.

Soil, deep clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

SUBDIVISION T. 22 S., R. 13 W.

Chains

S. 89°56' E., on random line bet. secs. 4 and 9.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

80.18 Intersect the N. and S. line, 3 lks. N. of the cor. secs. 3, 4, 9 and 10.

Thence,

N. 89°55' W., on true line bet. secs. 4 and 9.

Ascend gradually over broken land through scattered undergrowth.

2.20 Spur, 20 ft. above cor., projects SE.; descend gradual SW. slope.

39.00 Ravine at base of broken land, 110 ft. below spur, drains SE.; ascend gradual NE. slope, over rolling land.

39.50 Road, bears NW. and SE.

40.09 On rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

S4  
 $\frac{1}{4}$  ———  
S9

1925

Raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.

80.18 The cor. secs. 4, 5, 8 and 9, 60 ft. above ravine.

Land, rolling and broken, with a general southeasterly exposure and drainage.

Soil, deep and shallow clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

N. 0°06' E., on random line bet. secs. 4 and 5.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

80.00 Intersect the N. bdy. of the township, 9 lks. W. of the cor. secs. 4, 5, 32 and 33.

Thence,

S. 0°10' W., on true line bet. secs. 4 and 5.

Over rolling land through scattered undergrowth.

SUBDIVISION T. 22 S., R. 13 W.

Chains	
3.00	Wash, 40 lks. wide, 3 ft. deep, course E.
40.00	On rolling land.
	Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in ground, for $\frac{1}{4}$ sec. cor., with brass cap marked.
	$\frac{1}{4}$ 85   84 1925
	Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of c
45.00	Wash, 15 lks. wide, 1 ft. deep, course N. 60° E.
57.00	Spur, 40 ft. above sec. cor., projects S. 70° E.
63.00	Base of spur, bears SW. and E.
80.00	The cor. secs. 4, 5, 8 and 9, 30 ft. below spur.
	Land, rolling, with a general northeasterly exposure and drainage.
	Soil, shallow and deep clay and sand loam; 3rd rate.
	Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.
	No timber.
	Fair grazing.
	From the cor. secs. 5, 6, 31 and 32; on the S. bdy. of the township, which is an iron post, 2 ins. diam., with brass cap, set, marked, and witnessed as described in the finished notes of the survey T. 23 S., R. 13 W. N. 0°03' W., bet. secs. 31 and 32.
	Ascend gradually over broken S. slope of ridge through scattered undergrowth,
7.00	Rocky ridge, 30 ft. above cor., bears N. 30° E. and S. 30° descend gradually over broken W. slope.
25.00	Ravine, 120 ft. below ridge, drains SW.; head about 10.00 chains to the E.; ascend gradual S. slope.
40.00	On gradual S. slope.
	Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground to solid rock and 26 ins. in a mound of stone, for $\frac{1}{4}$ sec. cor., with brass cap marked.

## SUBDIVISION T. 22 S., R. 13 W.

$\frac{1}{4}$   
 S31 | S32  
 1925

Deposit a limestone, 8 x 8 x 2 ins., at base of post, marked with a cross (X).

80.00 On abrupt S. slope of spur, 400 ft. above ravine.

Set an iron post, 3 ft. long, 2 ins. diam., 20 ins. in the ground to solid rock and 16 ins. in a mound of stone, for cor. secs. 29, 30, 31 and 32, with brass cap marked.

T22S R13W  
 S30 | S29  
 S31 | S32  
 1925

Deposit a limestone, 8 x 6 x 2 ins., at base of post, marked with a cross (X).

Land, broken, with a general southwesterly exposure and drainage.

Soil, shallow rocky clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, chadscale, mountain rush and yellow top.

No timber.

Fair grazing.

S. 89°50' E., on random line bet. secs. 29 and 32.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

80.04 Intersect the N. and S. line, 3 lks. N. of the cor. secs. 28, 29, 32 and 33.

Thence,

N. 89°49' W., on true line bet. secs. 29 and 32.

Ascend gradually over broken SE. slope through scattered undergrowth.

1.90 Road, bears N. and S. 20° E.

23.00 Spur, 190 ft. above cor., projects NE.; thence along gradual N. slope.

40.02 On gradual N. slope.

Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the

## SUBDIVISION T. 22 S., R. 13 W.

Chains

ground, to solid rock and 26 ins. in a mound of stone  
for  $\frac{1}{4}$  sec. cor., with brass cap marked.

$$\frac{1}{4} \frac{S29}{S32}$$

1925

Deposit a limestone, 6 x 4 x 4 ins., at base of post,  
marked with a cross (X).

48.70 Ridge, same level as spur, bears S. and N. 70° W.; thence  
ascend gradually along S. slope of spur from ridge.

74.00 Top of ascent, bears NE. and SW.

80.04 The cor. secs. 29, 30, 31 and 32, 100 ft. above ridge.  
Land, broken, with a general northeasterly and south-  
easterly exposure and drainage.

Soil, shallow rocky clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, chadscale, mountain  
rush and yellow top.

No timber.

Fair grazing.

N. 89°50' W., on random line bet. secs. 30 and 31.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

77.25 Intersect the W. bdy. of the township, at the cor. secs.  
25, 30, 31 and 36, which is an iron post, 2 ins. diam.  
with brass cap, set, marked and witnessed as described  
in the official records of the survey T. 22 S., R. 14

Thence,

S. 89°50' E., on true line bet. secs. 30 and 31.

Over level land through scattered undergrowth.

12.30 Base of abrupt ascent over broken W. slope of ridge.

37.25 On broken W. slope of ridge, 80 ft. above sec. cor.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the  
ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

$$\frac{1}{4} \frac{S30}{S31}$$

1925

Raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor

SUBDIVISION T. 22 S., R. 13 W.

**Chains**

71.00 Ridge, 670 ft. above the  $\frac{1}{4}$  sec. cor., bears NE. and SW.; descend abrupt SE. slope.

77.25 The cor. secs. 29, 30, 31 and 32, 40 ft. below ridge. Land, level and broken, with a general westerly exposure and drainage.

Soil, deep and shallow sand and clay loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.


N. 0°03' W., bet. secs. 29 and 30.

Ascend abrupt SE. slope of broken land through scattered undergrowth.

2.10 Top of rocky ridge, 60 ft. above cor., bears N. 60° E. and S. 60° W.; descend gradually along broken W. slope.

40.00 On broken W. slope, 230 ft. below ridge.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.




Raise a mound of stone, 2 ft. base, 1 ft. high, W. of cor.

44.20 Ravine, 40 ft. deep, drains SW.; thence along broken E. slope at W. side of ravine.

72.60 Head of ravine, drains S. 10° E.; thence along broken W. slope.

80.00 On broken W. slope, 230 ft. above the  $\frac{1}{4}$  sec. cor.

Set an iron post, 3 ft. long, .2 ins. diam., 12 ins. in the ground to solid rock and 24 ins. in a mound of stone, for cor. secs. 19, 20, 29 and 30, with brass cap marked.



Deposit a lava stone, 8 x 6 x 4 ins., at base of post,

SUBDIVISION T. 22 S., R. 13 W.

Chains

Land, broken, with a general westerly exposure and drainage.

Soil, shallow rocky clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

S. 89°49' E., on random line bet. secs. 20 and 29.

40.00 Set temp. 1/4 sec. cor.

79.91 Intersect the N. and S. line, 3 lks. S. of the cor. secs 20, 21, 28 and 29.

Thence,

N. 89°50' W., on true line bet. secs. 20 and 29.

Ascend gradually over broken N. slope through scattered undergrowth.

39.955 On broken N. slope.

Set an iron post, 3 ft. long, 1 in. diam., 14 ins. in the ground to solid rock and 22 ins. in a mound of stone, for 1/4 sec. cor., with brass cap marked.

1/4 S20  
-----  
S29  
1925

Deposit a limestone, 7 x 5 x 4 ins.; at base of post, marked with a cross (X).

70.20 Top of ridge, 190 ft. above sec. cor., bears N. and S. 30° E.; descend abrupt W. slope of ridge.

79.91 The cor. secs. 19, 20, 29 and 30, 100 ft. below top of ridge  
Land, broken, with a general easterly exposure and drainage.

Soil, shallow rocky sand and clay loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

## SUBDIVISION T. 22 S., R. 13 W.

chains

N. 89°50' W., on random line bet. secs. 19 and 30.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

77.24 Intersect the W. bdy. of the township, 5 lks. N. of the cor. secs. 19, 24, 25 and 30, which is an iron post, 2 ins. diam., with brass cap, set, marked, and witness as described in the finished notes of the survey T. 22 S., R. 14 W.

Thence,

S. 89°52' E., on true line bet. secs. 19 and 30.

Over level land through scattered undergrowth.

37.24 On level land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

$$\begin{array}{r} 319 \\ \frac{1}{4} \\ \hline 330 \end{array}$$

1925

Raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$  ft. high, N. of cor.

40.00 Base of abrupt ascent over broken W. slope of ridge, bears N. and S.

77.24 The cor. secs. 19, 20, 29 and 30, 740 ft. above sec. cor. Land, level and broken, with a general westerly exposure and drainage.

Soil, deep and shallow clay and sand loam; 3rd rate.

Undergrowth, scattered logbrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

N. 0°03' W., bet. secs. 19 and 20.

Descend gradually over broken W. slope of ridge through scattered undergrowth.

40.00 On broken W. slope at base of descent, 360 ft. below sec. cor.

Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground to solid rock and 24 ins. in a mound of stone, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

## SUBDIVISION T. 22 S., R. 13 W.

Chains

$$\begin{array}{c} \frac{1}{4} \\ \uparrow \\ S19 \mid S20 \\ \downarrow \\ 1925 \end{array}$$

Deposit a lava stone, 4 x 4 x 2 ins., at base of post, marked with a cross (X).

Thence, ascend gradually over broken W. slope.

80.00 On broken W. slope, 190 ft. above the  $\frac{1}{4}$  sec. cor.

Set an iron post, 3 ft. long, 2 ins. diam., 12 ins. in the ground to solid rock and 24 ins. in a mound of stone, for cor. secs. 17, 18, 19 and 20, with brass cap marked.

$$\begin{array}{c} T22S \mid R13W \\ S18 \mid S17 \\ \hline S19 \mid S20 \\ 1925 \end{array}$$

Deposit a lava stone, 8 x 6 x 4 ins., at base of post, marked with a cross (X).

Land, broken, with a general westerly exposure and drainage.

Soil, shallow rocky clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

S. 89°50' E., on random line bet. secs. 17 and 20.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

79.90 Intersect the N. and S. line, 5 lks. S. of the cor. secs. 16, 17, 20 and 21.

Thence,

N. 89°52' W., on true line bet. secs. 17 and 20.

Descend gradual W. slope of broken land through scattered undergrowth.

33.00 Ravine, 80 ft. below cor., drains NE.; ascend gradual  $\frac{1}{4}$  slope of ridge.

38.20 Road, bears NW. and S. 70° E.

SUBDIVISION T. 22 S., R. 13 W.

Chains

39.95 On top of spur, projects NE.  
 Set an iron post, 3 ft. long, 1 in. diam., 16 ins. in the ground to solid rock and 20 ins. in a mound of stone, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

$$\frac{1}{4} \frac{S17}{S20}$$
 1925

From which,  
 A juniper, 6 ins. diam., bears N. 78°30' E., 30 lks. dist., marked BT.  
 A juniper, 4 ins. diam., bears S. 70° W., 39 lks. dist., marked BT.

Trees too scrubby for other marks.

73.60 Ridge, 270 ft. above ravine, bears N. 20° W. and S.; descend abrupt W. slope of ridge.

79.90 The cor. secs. 17, 18, 19 and 20, 250 ft. below ridge.  
 Land, broken, with a general easterly and westerly exposure and drainage.

Soil, shallow rocky clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain-rush and yellow top.

No timber.

Fair grazing.

N. 89°52' W., on random line bet. secs. 18 and 19.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

77.15 Intersect the W. bdy. of the township, 21 lks. S. of the cor. secs. 13, 18, 19 and 24, which is an iron post, 2 ins. diam., with brass cap, set, marked and witnessed as described in the finished notes of the survey T. 22 S., R. 14 W.

Thence,

S. 89°43' E., on true line bet. secs. 18 and 19.

Over level land through scattered undergrowth.

37.15 On level land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the

SUBDIVISION T. 22 S. R. 13 W.

Chains

S18

1/4  
-----  
S19

1925

42.00 Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of  
Base of abrupt ascent over broken W. slope of ridge, bearing  
N. and S.

77.15 The cor. secs. 17, 18, 19 and 20, 450 ft. above sec. cor.  
Land, level and broken, with a general westerly exposure  
and drainage.  
Soil, deep and shallow clay and sand loam; 3rd rate.  
Undergrowth, scattered sagebrush, shadscale, mountain  
rush and yellow top.  
No timber.  
Fair grazing.

N. 0°03' W., bet. secs. 17 and 18.

Ascend abruptly over broken SW. slope through scattered  
undergrowth.

14.20 Ridge, 140 ft. above cor., bears N. 20° W. and S. 20° E.  
thence along broken E. slope of ridge near top.

37.70 Recross top of same ridge, bears N. 20° E. and S. 20° W.

40.00 On broken W. slope of ridge near top.

Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the  
ground to solid rock and 24 ins. in a mound of stone,  
for a sec. cor., with brass cap marked.

1/4  
S18 | S17  
1925

Deposit a lava stone, 9 x 6 x 3 ins., at base of post,  
marked with a cross (X).

43.10 Recross same ridge, at bend in top, bears N. 20° E.  
and S. 20° E.; descend gradually along broken W. slope  
of ridge.

80.00 On broken W. slope, 330 ft. below top of ridge.

Set an iron post, 3 ft. long, 2 ins. diam., 14 ins. in

SUBDIVISION T. 22 S., R. 13 W.

Chains

the ground to solid rock and 22 ins. in a mound of stone, for cor. secs. 7, 8, 17 and 18, with brass cap marked.

T22S	R13W
S7	S8
S18	S17

1925

Deposit a limestone, 10 x 8 x 4 ins., at base of post, marked with a cross (X).

Land, broken, with a general westerly exposure and drainage.

Soil, shallow rocky clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

S. 89°52' E., on random line bet. secs. 8 and 17.

40.00 Set temp. sec. cor.

79.93 Intersect the N. and S. line, 5 lks. N. of the cor. secs. 8, 9, 16 and 17.

Thence,

N. 89°50' W., on true line bet. secs. 8 and 17.

Ascend gradually along broken S. slope of spur, through scattered undergrowth.

39.965 On broken S. slope,

Set an iron post, 3 ft. long, 1 in. diam., 14 ins. in the ground to solid rock and 22 ins. in a mound of stone, for 1/4 sec. cor., with brass cap marked.

S8
1/4
S17

1925

Deposit a limestone, 5 x 5 x 3 ins., at base of post, marked with a cross (X).

66.40 Ridge, 370 ft. above sec. cor., bears N. 20° W. and S.; descend abrupt W. slope of ridge.

79.93 The cor. secs. 7, 8, 17 and 18, 350 ft. below ridge.

Land, broken, with a general southerly and westerly

## SUBDIVISION T. 22 S., R. 13 W.

## Chains

exposure and drainage.

Soil, shallow rocky clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain  
rush and yellow top.

No timber.

Fair grazing.

N. 89°43' W., on random line bet. secs. 7 and 18.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

77.00 Intersect the cor. secs. 7, 12, 13 and 18, on the W. bdy  
of the township, which is an iron post, 2 ins. diam.,  
with brass cap, set, marked and witnessed as describe  
in the official records of the survey T. 22 S., R. 13 W.

Thence,

S. 89°43' E., on true line bet. secs. 7 and 18.

Over level land through scattered undergrowth.

37.00 On level land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in th  
ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

$$\begin{array}{r} S7 \\ \frac{1}{4} \\ \hline S18 \end{array}$$

1925

Large mound of stone, 2 ft. base, 1 $\frac{1}{2}$  ft. high, N. of c

30.00 Base of abrupt ascent over broken W. slope of ridge, bear  
N. and S.

27.00 The cor. secs. 7, 8, 17 and 18, 450 ft. above sec. cor.  
Land, level and broken, with a general westerly exposure  
and drainage.

Soil, deep and shallow clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain  
rush and yellow top.

No timber.

Fair grazing.

SUBDIVISION T. 22 S., R. 13 W.

STRIKES


N. 0°03' W., bet. secs. 7 and 8.

Ascend abruptly over broken W. slope through scattered undergrowth.

32.40 Rocky spur, 300 ft. above cor., projects W.; descend gradually along broken W. slope.

40.00 On broken W. slope.

Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground to solid rock and 26 ins. in a mound of stone, for sec. cor., with brass cap marked.




Deposit a lava stone, 6 x 6 x 2 ins., at base of post, marked with a cross (X).

77.50 Spur, projects NW.

80.00 on broken NE slope, 290 ft. below first spur.

Set an iron post, 3 ft. long, 2 ins. diam., 16 ins. in the ground to solid rock and 20 ins. in a mound of stone, for cor. secs. 5, 6, 7 and 8, with brass cap marked.



Deposit a limestone, 8 x 6 x 4 ins., at base of post, marked with a cross (X).

Land, broken, with a general westerly exposure and drainage.

Soil, shallow rocky clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shade-cale, mountain rush and yellow top.

No timber.

Fair grazing.

SUBDIVISION T. 22 S., R. 13 W.

Chains	S. 89°50' E., on random line bet: secs: 5 and 8.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
80.00	Intersect the N. and S. line, 9 lks. N. of the cor. sec 4, 5, 8 and 9.
	Thence,
	N. 89°46' W., on true line bet: secs. 5 and 8.
	Ascend gradually over broken SE. slope of spur through scattered undergrowth.
30.00	Spur, 400 ft. above cor., projects NE.; descend abrupt N slope.
40.00	On broken NW . slope.
	Set an iron post, 3 ft. long, 1 in. diam., 6 ins. in the ground to solid rock and 30 ins. in a mound of stone, for $\frac{1}{4}$ sec. cor., with brass cap marked.
	$\frac{1}{4} \frac{S5}{S8}$ 1925
	Deposit a limestone, 8 x 8 x 6 ins., at base of post, marked with a cross (X).
55.00	Ravine, 300 ft. below spur, drains NE.; ascend gradual SE. slope of ridge.
65.00	Ridge, 70 ft. above ravine, bears N. 10° W. and S. 10° E descend abrupt SW. slope of ridge.
75.00	Ravine, 270 ft. below ridge, drains NW.; heads about 10.0 chs. to the SE.; ascend gradual NE. slope.
80.00	The cor. secs. 5, 6, 7 and 8, 10 ft. above ravine.
	Land, broken, with a general northeasterly and northwest exposure and drainage.
	Soil, shallow rocky clay and sand loam; 3rd rate.
	Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.
	No timber.
	Fair grazing.

## SUBDIVISION T. 22 S., R. 13 W.

Chains

N. 89°43' W., on random line bet. secs. 6 and 7.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

76.90 Intersect the W. bdy. of the township, 9 lks. N. of the cor. secs. 1, 6, 7 and 12, which is an iron post, 2 ins. diam., with brass cap, set, marked and witnessed as described in the official records of the survey T. 22 S., R. 14 W.

Thence,

S. 89°47' E., on true line bet. secs. 6 and 7.

Over level land through scattered undergrowth.

22.00 Base of gradual ascent over broken W. slope, bears N. and S.

36.90 On gradual W. slope.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

$$\frac{36}{\frac{1}{4}} = 57$$

1925

Deposit a limestone, 6 x 4 x 2 ins., at base of post, marked with a cross (X).

No other suitable accessories available and soil too loose for pits.

75.00 Spur, 220 ft. above sec. cor., projects NW.; descend gradual NE. slope.

76.90 The cor. secs. 5, 6, 7 and 8, 20 ft. below spur.

Land, level and broken, with a general westerly exposure and drainage.

Soil, shallow and deep clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

## SUBDIVISION T. 22 S., R. 13 W.

## Chains

- E.  $0^{\circ}10'$  E., on random line bet. secs. 5 and 6.
- 40.00 Set temp.  $\frac{7}{8}$  sec. cor.
- 80.16 Intersect the N. bdy. of the township, 5 lks. W. of the  
cor. secs. 5, 6, 31 and 32. .
- Thence,
- S.  $0^{\circ}12'$  W., on true line bet. secs. 5 and 6.
- Descend gradually along broken E. slope of ridge near to  
through scattered undergrowth,
- 22.00 Ridge, bears N.  $20^{\circ}$  W. and S.  $20^{\circ}$  E., 80 ft. below cor.  
descend abrupt SW. slope of ridge.
- 40.16 On broken SW. slope.
- Set an iron post, 3 ft. long, 1 in. diam., 24 ins. in the  
ground to solid rock and 12 ins. in a mound of stone,  
for  $\frac{1}{4}$  sec. cor., with brass cap marked.
- $\frac{1}{4}$   
 S6 | S5  
 1925
- Deposit a lava stone, 7 x 6 x 1 ins., at base of post,  
marked with a cross (X).
- 57.40 Ravine, 300 ft. below ridge, drains S.  $70^{\circ}$  W.; ascend  
abrupt N. slope.
- 63.20 Spur, 70 ft. above ravine, projects W., 10.00 chs. dist.  
descend abrupt S. slope.
- 75.40 Ravine, 80 ft. below spur, drains NW.; ascend abrupt NE.  
slope.
- 80.16 The cor. secs. 5, 6, 7 and 8, 90 ft. above ravine.
- Land, broken, with a general westerly exposure and drain-  
age.
- Soil, shallow loose rocky clay and sand loam; 3rd rate.
- Undergrowth, scattered sagebrush, shadscale, mountain  
rush and yellow top.
- No timber.
- Fair grazing.

CLOSING ERRORS, T. 22 S., R. 13 W.

Lines designated	True Bearings	Dist-ances. Chs.	Latitudes		Departures	
			N. Chs.	S. Chs.	E. Chs.	W. Chs.
W. Bdy. T22S R13W	South	480.00	.....	480.00	.....	.....
S. Bdy. T22S R13W	S.89°50'E.	477.70	.....	1.39	477.70	.....
E. Bdy. T22S R13W	North	480.00	.....	.....	.....	.....
N. Bdy. T22S R13W	N.89°48'W.	477.29	1.67	.....	.....	477.29
Convergency	West	.58	.....	.....	.....	.58
			<u>481.67</u>	<u>481.39</u>	<u>477.70</u>	<u>477.87</u>
			<u>481.39</u>			<u>477.70</u>
Errors in latitudes and departures			0.28			0.17

GENERAL DESCRIPTION, T. 22 S., R. 13 W.

The lands within the boundaries of this township, in most places consists of low rolling hills and benches, broken by deep ravines and outcroppings of limestone and lava formations.

Except the west range of sections, the township has a general easterly exposure and drainage, and is drained by numerous washes and ravines leading into Sevier Lake, which is located about one and a half miles to the east of the township. The west range of sections has a general westerly exposure and drainage, and is drained by washes and ravines which lead to large clay flats along the west boundary of the township.

The soil consists of a deep and shallow rocky clay and sand loam, and may be classified as third rate.

The only timber found in the township, were a few scattered scrub junipers located in sections 17, 18, 19 and 20.

The entire township is covered with a scattered undergrowth of sagebrush, shade-scale, mountain rush, yellow top, and native grasses, which affords fair grazing for stock during the winter months, it being impossible to graze the township during the summer months on account of there being no water found on the township.

No portions of the township are suitable for farming, and no settlers, improvements or indications of mineral

264  
BLANK A-481  
187 A 100000  
GENERAL DESCRIPTION, T. 22 S., R. 13 W.

were found.

Dim wagon roads were found throughout the township,

making most places accessible by wagon.

The township can be reached by auto by a road which is

in poor condition which bears in a westerly direction  
from Blackrock, Ut.

The township in general is suitable for a winter grazing

range for sheep and at the time of the survey, it was

being used for this purpose.



CERTIFICATE OF UNITED STATES SURVEYOR.

I, Willis W. Bandy, U. S. Surveyor, hereby certify upon honor that, in pursuance of special instructions received from the U. S. Surveyor General for Utah bearing date of the 19th day of March, 1921, I have well, faithfully, and in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Regulations, and the laws of the United States, surveyed all those parts or portions of independent resurvey of the north and east boundaries and survey of the subdivision of, T. 22 S., R. 13 W.

of the Salt Lake Meridian, in the State of Utah, which are represented on dates shown on said diagram and date diagram the foregoing field notes as having been executed by me, and under my direction, and that all the corners of said survey have been established and perpetuated in strict accordance with the Manual of Surveying Regulations, and the special written instructions of the U. S. Surveyor General for Utah and in the specific manner described in the field notes, and that the foregoing are the original field notes of such survey.

Place: T. 22 S., R. 13 W.

Willis W. Bandy U.S. Surveyor

Date: May 24, 1927

APPROVAL.

Office of the United States Supervisor of Surveys

Denver, Colorado, DEC 10

The foregoing field notes of the independent resurvey of the north and east boundaries and survey of the subdivisional lines of Township 22 South, Range No. 13 West of the Salt Lake Base and Meridian, U

executed by Willis W. Bandy, U. S. Surveyor

under his special instructions dated March 19, 1921, having critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

Supervisor of Surveys

I certify that the foregoing transcript of the field notes of the above described surveys in has been correctly copied from the original notes on file in this office

Blank

Page

**Blank**

**Page**

"B"

4-678

BOOK A-481

RECEIVED

MAY 28 1927

District Cadastral Engineer,  
Salt Lake City, Utah

# FIELD NOTES

~~CONFIDENTIAL~~

AN INDEPENDENT RESURVEY OF THE EAST BOUNDARY OR SEVIER LAKE GUIDE  
MERIDIAN, INDEPENDENT RESURVEY OF THE NORTH BOUNDARY, AND SURVEY OF  
SUBDIVISION OF TOWNSHIP NO. 23 SOUTH, RANGE NO. 13 WEST.

Of the Salt Lake Base and Meridian,

in the State of Utah.

EXECUTED BY

Willis W. Bandy

in the capacity of U. S. Surveyor, under instructions dated March 19, 1921, 191...  
issued by the United States Surveyor General to govern surveys included in  
Group No. 101, which were approved by the Commissioner of the General Land  
Office, March 25, 1921, 191, pursuant to authority contained in the Act of  
Supplemental Assignment Instructions dated May 5, 1925.  
Congress dated, 191...

Survey commenced June 3, 1925, 191...

Survey completed June 19, 1925, 191...

270  
2000 A 481

# INDEX DIAGRAM.

Township 14	No. 23 13	South 12	Range 11	No. 13 10	West. 9
69	53	43	32	23	1
68	67	52	42	31	22
66	51	41	30	22	19
65	64	50	40	29	21
63	49	39	29	20	18
62	61	48	38	28	19
60	48	37	27	19	24
59	58	47	36	26	18
57	46	35	25	17	25
56	55	45	34	25	16
54	44	33	24	15	24

1.

Test of Instrument.

Township 23 South, Range 13 West.

DATE DIAGRAM

OF

T. 23 S., R. 13 W.

6/10/25	6/10/25	6/10/25	6/10/25	6/10/25	6/10/25
6	5	4	3	2	1
6/19/25	6/18/25	6/18/25	6/16/25	6/12/25	6/9/25
7	8	9	10	11	12
6/17/25	6/19/25	6/15/25	6/16/25	6/12/25	6/9/25
18	17	16	15	14	13
6/17/25	6/15/25	6/13/25	6/11/25	6/9/25	6/6/25
19	20	21	22	23	24
6/15/25	6/13/25	6/11/25	6/8/25	6/6/25	6/5/25
30	29	28	27	26	25
6/13/25	6/11/25	6/8/25	6/6/25	6/5/25	6/5/25
31	32	33	34	35	36
6/11/25	6/8/25	6/6/25	6/5/25	6/5/25	6/3/25

Survey commenced June 3, 1925, and executed by Willis W. Bandy, U. S. Surveyor, with a Young and Sons transit No. 8513. The instrument is equipped with a Smith solar attachment and full vertical circle, the horizontal limb being provided with two double verniers placed opposite to each other and reading to single minutes of arc, which is also the least count of the verniers of the latitude and declination arcs, and vertical circle.

## Test of Instrument.

## Township 23 South, Range 13 West.

The instrument was approved for use on this survey by the Assistant Supervisor of Surveys for District No. 6, in Supplemental Assignment Instructions dated May 5, 1925, conditional upon satisfactory field tests. June 2, 1925, at camp, in sec. 21, T. 23 S., R. 13 W., in approximate latitude  $38^{\circ}48'N.$ , approximate longitude  $113^{\circ}17' W.$ , I examine the adjustments of the instrument and correct the errors in the plate levels and the line of collimation of the main telescope. Then, to test the solar apparatus by comparing its indications, resulting from solar observations made during a. m. and p. m. hours with a meridian established by observations on Polaris, I proceed as follows:

June 3, 1925, at 2h 51.9m a. m., l. m. t., I observe Polaris at eastern elongation, making four observations, two each with the telescope in direct and reversed positions, and mark the mean point in the line thus determined with a pencil, on a stake driven firmly in the ground approximately eight chains N. of my station.

At 7 a. m., apparent time, I lay off the azimuth of Polaris  $1^{\circ} 25'$  to the west, and mark the meridian with a nail in a stake set firmly in the ground about eight chains N. of my station.

At 8h 0m a. m., apparent time, I set off  $38^{\circ}48' N.$ , on the lat. arc;  $22^{\circ}19' N.$ , on the decl. arc; and determine a meridian with the solar which agrees within 30 seconds of the true meridian.

At apparent noon, with the lat. arc unchanged, I observe the sun on the meridian; the resulting reading of the decl. arc is  $22^{\circ}19'30'' N.$ , which agrees within one half minute of the computed decl. of the sun.

At 4h 0m p. m., apparent time, with the lat. arc unchanged, I set off  $22^{\circ}21' N.$ , on the decl. arc; and

## Test of Instrument.

Township 23 South, Range 13 West.

determine a meridian with the solar which practically coincides with the meridian obtained by observations on Polaris.

All of the tests during the hours suitable for solar work practically coincide with the true meridian; therefore, I conclude that the adjustments of the instrument are satisfactory.

The instrument was tested every week on the Polaris meridian, and observations for latitude and declination were taken frequently. All measurements were determined with a five chain Lallie steel tape, which was compared at the beginning and close of the survey of this township with a Lufkin standard one chain steel tape kept for this purpose only; and the distances measured on the slope were reduced to the horizontal by using clinometers.

The test of this instrument given at the beginning of the finished field notes of T. 22 S., R. 13 W., serves as the final test for the survey of T. 23 S., R. 13 W.

## Method and Order of Procedure.

The south boundary of this township was surveyed under this group, and the bearing is N.89°48'W., the distance 478.02 chs., and the fractional measurement is placed in the western half mile.

The west boundary was established in 1909 by R. E. L. Collier and Ralph Gentry, U. S. Deputy Surveyors, and the bearing is north, and the distance 480.00 chs.

The north and east boundaries were surveyed in 1882 by Andrew J. Stewart, Jr., U. S. Deputy Surveyor, but no trace of this survey could be found, and as there are no subdivisions dependent thereon, I make an independent resurvey of both of these boundaries. The east boundary is the Sevier Lake Guide Meridian, and is run north from the corner of Tps. 23 and 24 S., Rs. 12 and

Method and Order of Procedure.

Chains.

13 W. a distance of 480.00 chs. to a point where I establish the corner of Tps. 22 and 23 S., Rs. 12 and 13 W.

The north boundary is run random and true from the corner of Tps. 22 and 23 S., Rs. 12 and 13 W. to the corner of Tps. 22 and 23 S., Rs. 13 and 14 W. The bearing of this boundary is N.89°50'W., the distance 477.70 chs., and the fractional measurement is placed in the western half mile.

The township is subdivided in the regular manner, from the south to the north, and from the east to the west, placing the fractional distances against the north and west boundaries.

Independent Resurvey of the Sevier Lake Guide Meridian through Township 23 South, between Ranges 12 and 13 West, superseding the Original Survey executed in 1882, by Andrew J. Stewart, Jr., U. S. Deputy Surveyor.


Commence at the cor. of Tps. 23 and 24 S., Rs. 12 and 13 W., which is an iron post, 3 ins. in diam., established marked and witnessed as described in the official field notes of the survey of T. 24 S., R. 13 W., in this group.

North, on a true line on an independent resurvey, along the E. bdy. of T. 23 S., R. 13 W., bet. secs. 31 and 36.

Over rolling bench land, through dense short undergrowth.

27.50 Top of ascent, bears N. and SW.; desc. along gradual E. slope.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for 1/4 sec. cor., with brass cap marked:




Sevier Lake Guide Meridian.

Independent Resurvey of the East Edy. of T. 23 S., R. 13 W.

Chains.

and dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 27 ins. in the ground, for cor. of secs. 25, 30, 31 and 36, with brass cap marked:



At the base of the monument, I deposit a lava rock, 6x4x3 ins., marked with a cross (X).; and dig pits, 18x18x12 ins., NE., SE., SW. and NW. of post, 3 ft. dist.

Land, rolling bench; draining generally to the E. Soil, sandy clay loam.

Undergrowth, sagebrush, shadscale, mountain rush and yellow top.

Fair growth of bunch grass.


No timber.

North, bet. secs. 25 and 30.

Over rolling bench land, through dense short undergrowth.

30.20 Dry wash, 30 lks. wide, 3 ft. deep, drains E.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 8 ins. in the ground to solid rock, and in a mound of stone, for 1/4 sec. cor., with brass cap marked:



At the base of the monument, I deposit a limestone, 8x4x3 ins., marked with a cross (X).

45.00 Road bears N.70°W. and S.70°E.

80.00 On the N. edge of bench, bearing NW. and SE., set an iron post, 3 ft. long, 2 ins. in diam., 27 ins. in the ground, for cor. of secs. 19, 24, 25 and 30, with brass cap marked:

## Sevier Lake Guide Meridian.

## Independent Resurvey of the East Bdy. of T. 23 S., R. 13 W.

Chains.

T23S	
R13W	R12W
S24	S19
S25	S30
1925	

and raise a mound of stone, 2 ft. base, 1½ ft. high,

W. of cor.

Land, rolling bench, draining generally to the E.

Soil, sandy clay loam.

Undergrowth, sagebrush, shadscale, mountain rush and  
yellow top.


Fair growth of bunch grass.

No timber.

North, bet. secs. 19 and 24.

Over nearly level land, through dense short undergrowth.

- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in  
the ground, for ¼ sec. cor., with brass cap marked:



and dig pits, 18x18x12 ins., N. and S. of post, 3 ft.  
dist.

- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 27 ins.  
in the ground, for cor. of secs. 13, 18, 19 and 24.,  
with brass cap marked:

T23S	
R13W	R12W
S13	S18
S24	S19
1925	

At the base of the monument, I deposit a limestone,  
4x3x2 ins., marked with a cross(X); and dig pits,  
18x18x12 ins., NE., SE., SW. and NW. of post, 3 ft.  
dist.

Land, nearly level, draining generally to the E.

Soil, sandy clay loam.

Undergrowth, sagebrush, shadscale, mountain rush and  
yellow top.

Sevier Lake Guide Meridian.

Independent Resurvey of the East Bdy. of T. 23 S., R. 13 W.

chains.


Fair growth of bunch grass.  
No timber.

North, bet. sees. 13 and 18.

Over nearly level land, through dense short undergrowth.

40.00

On the S. edge of bench, bearing NE. and SW., set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked:




and raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, W. of cor.

From this cor., over rolling bench to

80.00

Set an iron post, 3 ft. long, 2 ins. in diam., 27 ins. in the ground, for cor. of secs. 7, 12, 13 and 18, with brass cap marked:



and raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, W. of cor.

Land, nearly level, S. 40.00 chs.; rolling bench, N.

40.00 chs.; general drainage E.

Soil, sandy clay loam.

Undergrowth, sagebrush, shadscale, mountain rush and yellow top.

Timber, a scattering growth of scrubby cedar.


Fair growth of bunch grass.

North, bet. secs. 7 and 12.

Over rolling bench land, through dense short undergrowth.

40.00

Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked:



Sevier Lake State Meridian.

Independent Resurvey of the East Side of T. 22 S., R. 12 W.

Chains.

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

52.00 Dry wash, 12 lks. wide, 2 ft. deep, drains E.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 27 ins. in the ground, for cor. of secs. 1, 6, 7 and 12, with brass cap marked:

T23S	
R13W	R12W
S1	S6
S12	S7
1925	

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Land, rolling bench, draining generally to the E.

Soil, sandy clay loam.

Undergrowth, sagebrush, shadscale, mountain rush and yellow top.

Fair grazing of bunch grass.

No timber.

North, bet. secs. 1 and 6.

Over rolling bench land, through dense short undergrowth.

34.60 Dry wash, 10 lks. wide, 3 ft. deep, drains E.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for 1/4 sec. cor., with brass cap marked:

1/4	
S 1	S 6
1925	

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

80.00 Set an iron post, 3 ft. long, 3 ins. in diam., 28 ins. in the ground, for cor. of Tps. 22 and 23 S., Rs. 12 and 13 W., with brass cap marked:

T22S	
R13W	R12W
S36	S31
S1	S6
T23S	
1925	

and raise a mound of stone, 3 ft. base, 2 ft. high, S. of cor.

Sevier Lake Guide Meridian.

61. Independent Resurvey of the East Bdy. of T. 23 S., R. 13 W.

Chains.

Land, rolling bench, draining generally to the E.  
Soil, sandy clay loam.

Undergrowth, sagebrush, shadscale, mountain rush and  
yellow top.

Fair grazing of bunch grass.

No timber.

Independent Resurvey of the North Boundary of T. 23 S.,  
R. 13 W., superseding the Original Survey executed in  
1882 by Andrew J. Stewart, Jr., U. S. Deputy Surveyor.

Commence at the cor. of Tps. 22 and 23 S., Rs. 12 and 13  
W.

N.89°48'W., on a random line for alinement only, along  
the N. bdy. of T. 23 S., R. 13 W.

This line intersects the E. bdy. of T. 22 S., R. 14 W.,  
north 28 lks. dist. from the cor. of Tps. 22 and 23 S.,  
Rs. 13 and 14 W., hereinafter described. Therefore,  
the falling answers to a correction of 0°02'.

Thence, from the cor. of Tps. 22 and 23 S., Rs. 12 and  
13 W.,

N.89°50'W., on a true line on an independent resurvey  
along the N. bdy. of T. 23 S., R. 13 W., bet. secs. 1  
and 36.

Over rolling bench land, through dense short undergrowth.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in  
the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked:

S 36  
-----  
S 1  
1925

and raise a mound of stone, 2 ft. base, 1½ ft. high,  
N. of cor.

68.30 Road bears N.10°E. and S.10°W.

74.00 Begin ascent of 120 ft. over E. slope to

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 6 ins. in  
the ground to solid rock, and in a mound of stone, for

Independent Resurvey of the North Edge of T. 23. S. 23. E. 12.

Chains

cor. of secs. 1, 2, 35 and 36, with brass cap marked

T23S	R13W
S35	S36
32	31
T23S	
1925	

At the base of the monument, I deposit a limestone, 6x6x2 ins., marked with a cross (X).

Land, rolling bench, broken with spurs, and draining generally to the E.

Soil, sandy clay loam.

Undergrowth, sagebrush, shadscale, mountain rush and yellow top.

Fair grazing land.

No timber.

N.89°50'W., bet. secs. 2 and 35.

Over rough, broken and rolling land, through dense short undergrowth; asc. general E. slope 210 ft.

9.50 Rocky spur, projects S.10°E.; asc. 100 ft. to the top of spur.

12.70 Head of ravine, drains S.10°E.

20.60 Rocky spur, projects S; desc. abrupt W. slope 180 ft.

32.40 Base of descent, bears N. and S.; leave rough and broken land, and enter nearly level or gently rolling valley.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked:

S 35
$\frac{1}{4}$
S 2
1925

and raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, N. of cor.

54.80 Old road bears N.20°E. and S.20°W.

80.00 On the W. edge of the valley, bearing N.20°E. and S.20°W. 145 ft. above the  $\frac{1}{4}$  sec. cor., set an iron post, 3 ft. long, 2 ins. in diam., 20 ins. in the ground to solid rock, and in a mound of stone; for cor. of secs. 2, 3, 34 and 35, with brass cap marked:

Independent Resurvey of the North Edy. of T. 25 S., R. 13 W.

T22S	R13W
S34	S35
S3	S2
T23S	
1925	

At the base of the monument, I deposit a limestone, 6x6x6 ins., marked with a cross (X).

Land, rough, broken and rolling, E. 32.40 chs.; nearly level and rolling valley, W. 47.60 chs.; drainage SE. and E.; limestone formation.

Soil, sandy clay loam; gravelly in valley, rocky and shallow on the rough, broken and rolling land.

Undergrowth, sagebrush, shadscale, mountain rush and yellow top.

Fair growth of bunch grass.

No timber.

N.89°50'W., bet. secs. 3 and 34.

Over rough broken land or hills, through dense short undergrowth; asc. general E. slope 690 ft. to the top of spur.

5.00 Dry wash, 20 lks. wide, 3 ft. deep, drains SE.

36.00 Rocky spur, projects SE.; continue ascent of 20 ft. along general S. slope to

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 10 ins. in the ground to solid rock, and in a mound of stone, for 1/4 sec. cor., with brass cap marked:

1/4	S 34
	S 3
	1925

At the base of the monument, I deposit a limestone, 8x8x6 ins., marked with a cross (X).


42.00 Ridge, 15 ft. above 1/4 sec. cor., bears N.80°E. and S.80°W.; desc. 30 ft. across the head of draw, draining N.

49.00 Same ridge as noted at 42.00 chs., bears N.80°W. and S.80°E.; desc. abrupt SW. slope 305 ft. to the bottom of ravine.

Independent Resurvey of the North Edy. of T. 23 S., R. 1

Chains.

- 72.00 Top of broken ledges, 100 ft. high, bears N. and S.
- 74.00 Ravine, drains S.30°E.; asc. SE. slope 85 ft. to
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., over a cross (X) chiseled into surface rock, and in a mound of stone, for cor. of secs. 3, 4, 33 and 34, with brass cap marked:



Land, rough, broken and rolling hills; limestone exposed in the form of broken ledges and outcreppings; E. 42.00 chs. and W. 31.00 chs. drain S. and SE.; remainder of mile drains N.

Soil, gravelly and rocky, sandy clay loam.

Undergrowth, sagebrush, shadscale, mountain rush and yellow top.


Fair grazing land.

No timber.

N.89°50'W., bet. secs. 4 and 33.

Over rough rolling land or hills, through dense short undergrowth; asc. SE. slope 260 ft.

- 15.00 Ridge, bears N.80°E. and SW.; desc. 35 ft.
- 31.00 Ravine, drains N.; asc. NE. slope 15 ft.
- 34.00 Spur, projects N.30°W.; desc. SW. slope 25 ft. to
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 16 ins. in the ground to solid rock, and in a mound of stone, for  $\frac{1}{4}$  sec. cor., with brass cap marked:



At the base of the monument, I deposit a limestone, 8x6x4 ins., marked with a cross (X).

- 45.00 Old road bears NW. and S.30°E.
- 45.30 Dry wash, 20 lks. wide, 3 ft. deep, in the bottom of draw, 50 ft. below  $\frac{1}{4}$  sec. cor., drains NW.; asc. 145

## Independent Resurvey of the North Bdy. of T. 23 S., R. 13 W.

Chains.

ft. along general N. slope.

74.00 Ridge, bears NE. and S.70°E.; desc. 35 ft. to sec. cor.,  
along top of spur, projecting W.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., over a  
cross (X) chiseled into surface rock, and in a mound  
of stone, for cor. of secs. 4, 5, 32 and 33, with  
brass cap marked:

T22S	R13W
S32	S33
S5	S4
T23S	
1925	

Land, rough, broken and rolling land and hills; limestone  
exposed in the form of broken ledges and outcroppings;  
general drainage to the S., E. 15.00 chs. and W. 6.00  
chs.; remainder of mile drains N.

Soil, gravelly and rocky, sandy clay loam.

Undergrowth, sagebrush, shadscale, mountain rush and  
yellow top.

Fair growth of bunch grass.

No timber.

N.89°50'W., bet. secs. 5 and 32.

Desc. abrupt rough general NW. slope 230 ft., through  
dense short undergrowth.

10.30 Road bears NE. and SW.

10.50 Draw, drains SW.; asc. 45 ft. over broken SE. slope.

23.00 Spur, projects S.20°W.; desc. 70 ft. to the bottom of  
draw.

28.00 Road bears N.20°E. and S.20°W.

28.30 Dry wash, 12 lks. wide, 1 ft. deep, in the bottom of  
draw, drains S.20°W.; asc. E. slope 70 ft.

33.50 Spur, projects S. about 6.00 chs. dist.; desc. broken W.  
slope 35 ft. to

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in  
the ground to solid rock, and in a mound of stone, for  
½ sec. cor., with brass cap marked:

Independent Resurvey of the North Bdy. of T. 23 S., R. 15

Chains.

S 32
$\frac{1}{4}$
S 5.
1925

At the base of the monument, I deposit a limestone, 6x6x1 ins., marked with a cross (X).

59.10 Dry wash, 15 lks. wide, 1 ft. deep, in the bottom of draw, 20 ft. below  $\frac{1}{4}$  sec. cor., drains S.; asc. 80 ft

70.00 Spur, projects S.; desc. 70 ft.

76.00 Dry wash, 10 lks. wide, 2 ft. deep, in the bottom of draw, drains S.; asc. E. slope 25 ft. to

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 8 ins. in the ground to solid rock, and in a mound of stone, for cor. of secs. 5, 6, 31 and 32, with brass cap marked:

T22S	R13W
S31	S32
S6	S5
T23S	
1925	

At the base of the monument, I deposit a limestone, 14x12x8 ins., marked with a cross (X).

Land, rough and rolling land or hills, draining generally to the S.; broken ledges and outcroppings of limestone formation.

Soil, gravelly and rocky, sandy clay loam.

Undergrowth, sagebrush, shadscale, mountain rush and yellow top.

Fair grazing land.

No timber.

N.89°50'W., bet. secs. 6 and 31.

Asc. rough general E. slope 40 ft., through dense short undergrowth.

2.30 Main ridge, bears N.20°E. and S.20°W.; desc. 450 ft.

18.20 Ravine, drains S.20°W.; asc. E. slope 300 ft.

27.00 Spur, projects S.; desc. abruptly 300 ft., over general SW. slope to

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in

## Independent Resurvey of the North Bdy. of T. 23 S., R. 13 W.

Chains.

the ground to solid rock, and in a mound of stone,  
for  $\frac{1}{4}$  sec. cor., with brass cap marked:

$$\begin{array}{r} \frac{1}{4} \text{ S } 31 \\ \hline \text{S } 6 \\ 1925 \end{array}$$

At the base of the monument, I deposit a limestone,  
4x4x2 ins., marked with a cross (X).

49.00 Foot of spur or base of descent, 70 ft. below  $\frac{1}{4}$  sec.  
cor., bears NW. and SE.; over rolling top of bench to

77.70 Intersect the cor. of Tps. 22 and 23 S., Rs. 13 and 14  
W., which is an iron post, 3 ins. in diam., extending  
12 ins. above ground, firmly set, correctly marked,  
and witnessed by a trace of a pit in each sec., and  
by a mound of earth on the W. This cor. is located  
130 ft. below the  $\frac{1}{4}$  sec. cor.

Land, rolling land or hills with outcroppings and  
broken ledges of limestone formation, E. 49.00 chs.;  
rolling bench, W. 28.70 chs.; general drainage S., E.  
2.30 chs.; W. 75.40 chs. drain SW.

Soil, sandy clay loam; more shallow, gravelly and rocky  
on the E. 49.00 chs.

Undergrowth, sagebrush, shadscale, mountain rush and  
yellow top.

Fair growth of bunch grass.

No timber.

Survey of the Subdivision of T. 23 S., R. 13 W.


Commence at the cor. of secs. 1, 2, 35 and 36, on the  
S. bdy. of the Tp., which is an iron post, 2 ins. in  
diam., established, marked and witnessed as described  
in the official field notes of the survey of T. 24 S.,  
R. 13 W., in this group.

N.0°01'W., bet. secs. 35 and 36.

Over rolling bench land, through dense short undergrowth.


## Subdivision of T. 23 S., R. 13 W.

- Chains.  
 16.00 Road bears NE. and SW.  
 20.00 Begin ascent of 85 ft., over SE. slope.  
 31.30 Rocky spur, projects N.70°E. approximately 20.00 chs. dist.; desc. NW. slope 110 ft. to  
 40.00 At the base of descent, bearing NE. and SW., set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked:



and raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, W. of cor.

- From this cor., continue over nearly level bench to  
 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 27 ins. in the ground, for cor. of secs. 25, 26, 35 and 36, with brass cap marked:



and raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, W. of cor.

Land, rolling bench, draining generally to the E.; outcroppings of limestone and lava formation.

Soil, sandy clay loam.

Undergrowth, sagebrush, shadscale, mountain rush and yellow top.

Fair growth of bunch grass.

No timber.

- S.89°48'E., on a random line bet. secs. 25 and 36.  
 40.00 Set temp.  $\frac{1}{4}$  sec. cor.  
 80.11 Intersect the E. bdy. of the Tp., 2 lks. S. of the cor. of secs. 25, 30, 31. and 36, hereinbefore described.  
 Thence,  
 N.89°49'W., on a true line bet. secs. 25 and 36.  
 Over rolling bench land, through dense short undergrowth.

## Subdivision of T. 23 S., R. 13 W.

## Chains.

40.055 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked:

$$\begin{array}{r} S\ 25 \\ \frac{1}{4} \text{---} \\ S\ 36 \\ 1925 \end{array}$$

and raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, N. of cor.

52.20 Road bears N. and S.

80.11 The cor. of secs. 25, 26, 35 and 36.

Land, rolling bench, draining generally to the E.

Soil, sandy clay loam.

Undergrowth, sagebrush, shadscale, mountain rush and yellow top.

Fair growth of bunch grass.

No timber.

N.0°01'W., bet. secs. 25 and 26.

Over rolling bench land, through dense short undergrowth.

23.00 Dry wash, 20 lks. wide, 4 ft. deep, drains E.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked:

$$\begin{array}{ccc} & \uparrow & \\ S\ 26 & | & S\ 25 \\ & \downarrow & \\ & 1925 & \end{array}$$

and raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, W. of cor.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 27 ins. in the ground, for cor. of secs. 23, 24, 25 and 26, with brass cap marked:

$$\begin{array}{cc|cc} T23S & R13W & & \\ S23 & S24 & & \\ \hline S26 & S25 & & \\ 1925 & & & \end{array}$$

and raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, W. of cor.

Land, rolling bench, draining generally to the E.

Soil, sandy clay loam.

## Subdivision of T. 23 S., R. 13 W.

## Chains.

Undergrowth, sagebrush, shadscale, mountain rush and yellow top.

Fair growth of bunch grass.

No timber.

---

S.89°49'E., on a random line bet. secs. 24 and 25.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

80.18 Intersect the E. bdy. of the Tp., 2 lks. N. of the cor. of secs. 19, 24, 25 and 30, hereinbefore described.

Thence,

N.89°48'W., on a true line bet. secs. 24 and 25.

Over nearly level land, through dense short undergrowth.

7.20 Leave nearly level land, bears N.30°W. and S.30°E.; over rolling bench.

21.90 Road bears N. and SE.

23.40 Road bears NE. and SW.; this road joins the road noted at 21.90 chs., NE. about 3.00 chs. dist.

40.09 At the base of knoll, bearing N. and S., set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked:

$$\begin{array}{r} \text{S } 24 \\ \frac{1}{4} \text{ ---} \\ \text{S } 25 \\ 1925 \end{array}$$

and raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, N. of cor.

47.70 Top of knoll, 75 ft. above  $\frac{1}{4}$  sec. cor., bears N. and S.; desc. abruptly 60 ft.

51.20 Base of knoll, bears N. and S.; over nearly level bench to

80.18 The cor. of secs. 23, 24, 25 and 26.

Land, nearly level, rolling bench with knolls; outcroppings of limestone and lava formation; general drainage E.

Soil, sandy clay loam; more shallow, gravelly and rocky on knolls.

Undergrowth, sagebrush, shadscale, mountain rush and

## Subdivision of T. 23 S., R. 13 W.

chains

yellow top.

Fair grazing of bunch grass.

No timber.

N.0°01'W., bet. secs. 23 and 24.

Over rolling bench land, through dense short undergrowth.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in  
the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked:

$$\begin{array}{c} \frac{1}{4} \\ \text{S 23} \quad | \quad \text{S 24} \\ \hline 1925 \end{array}$$

and dig pits, 18x18x12 ins., N. and S. of post, 3 ft.  
dist.

67.70 Enter a sparse growth of cedar timber.

68.00 Dry wash, 20 lks. wide, 2 ft. deep, drains E.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 27 ins.  
in the ground, for cor. of secs. 13, 14, 23 and 24,  
with brass cap marked:

$$\begin{array}{c} \text{T23S} \quad | \quad \text{R13W} \\ \hline \text{S14} \quad | \quad \text{S13} \\ \hline \text{S23} \quad | \quad \text{S24} \\ \hline 1925 \end{array}$$

from which,

A cedar, 10 ins. diam., bears S.84°30'E., 255

lks. dist., marked T 23 S R 13 W S 24 B T.

There are no other trees available; therefore, I raise  
a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, W. of cor.  
Land, rolling bench, draining generally to the E.  
Soil, sandy clay loam.

Undergrowth, sagebrush, shadscale, mountain rush and  
yellow top.

Fair grazing land.

Timber, cedar.

S.89°48'E., on a random line bet. secs. 13 and 24.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

80.12 Intersect the E. bdy. of the Tp., 3 lks. N. of the cor.

## Subdivision of T. 23 S., R. 13 W.

Chains.

of secs. 13, 18, 19 and 24, hereinbefore described.

Thence,

N.89°47'W., on a true line bet. secs. 13 and 24.

Over nearly level land, through dense short undergrowth

20.30 Road bears N. and S.

35.10 Leave nearly level land, bears N.30°E. and S.30°W.; over rolling bench.

40.06 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked:

$$\begin{array}{c} \text{S 13} \\ \frac{1}{4} \\ \hline \text{S 24} \\ 1925 \end{array}$$

At the base of the monument, I deposit a limestone, 8x4x3 ins., marked with a cross (X); and dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist.

80.12 The cor. of secs. 13, 14, 23 and 24.

Land, nearly level, and rolling bench, draining generally to the E.

Soil, sandy clay loam.

Undergrowth, sagebrush, shadscale, mountain rush and yellow top.

Fair growth of bunch grass.

No timber.

N.0°01'W., bet. secs. 13 and 14.

Over rolling bench land; through dense short undergrowth.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked:

$$\begin{array}{c} \frac{1}{4} \\ \uparrow \\ \text{S 14} \quad | \quad \text{S 13} \\ \downarrow \\ 1925 \end{array}$$

and raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, W. of cor.

45.50 Line passes through saddle on low spur, projecting E.

76.90 Road bears NW. and SE.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 27 ins.

## Subdivision of T. 23 S., R. 13 W.

Remains.

in the ground, for cor. of secs. 11, 12, 13 and 14,  
with brass cap marked:

T23S	R13W
S11	S12
S14	S13
1925	

and raise a mound of stone, 2 ft. base, 1½ ft. high,  
W. of cor.

Land, rolling bench with general drainage to the E.

Soil, sandy clay loam.

Undergrowth, sagebrush, shadscale, mountain rush and  
yellow top.

Fair grazing land.

No timber.

S.89°47'E., on a random line bet. secs. 12 and 13.

40.00 Set temp. ¼ sec. cor.

80.14 Intersect the E. bdy. of the Tp., 9 lks. S. of the cor.  
of secs. 7, 12, 13 and 18, hereinbefore described.

Thence,

N.89°51'W., on a true line bet. secs. 12 and 13.

Over rolling bench land, through dense short undergrowth.

40.07 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in  
the ground, for ¼ sec. cor., with brass cap marked:

S 12
¼
S 13
1925

At the base of the monument, I deposit a limestone,  
10x8x2 ins., marked with a cross (X); and dig pits,  
18x18x12 ins., E. and W. of post, 3 ft. dist.

80.14 The cor. of secs. 11, 12, 13 and 14.

Land, rolling bench, draining generally to the E.

Soil, sandy clay loam.

Undergrowth, sagebrush, shadscale, mountain rush and  
yellow top.

Fair grazing of bunch grass.

No timber.

## Subdivision of T. 23 S., R. 13 W.

Chains.

N.0°01'W., bet. secs. 11 and 12.

Over rolling bench land, through dense short undergrowth

18.00 Dry wash, 30 lks. wide, 2 ft. deep, drains NE.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in  
the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked:
$$\begin{array}{c} \frac{1}{4} \\ \text{S 11} \quad | \quad \text{S 12} \\ \hline 1925 \end{array}$$
and raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high,  
W. of cor.80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 27 ins.  
in the ground, for cor. of secs. 1, 2, 11 and 12, with  
brass cap marked:
$$\begin{array}{c} \text{T23S} \quad | \quad \text{R13W} \\ \hline \text{S2} \quad | \quad \text{S1} \\ \hline \text{S11} \quad | \quad \text{S12} \\ \hline 1925 \end{array}$$
and raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high,  
W. of cor.

Land, rolling bench, draining easterly.

Soil, sandy clay loam.

Undergrowth, sagebrush, shadscale, mountain rush and  
yellow top.

Fair growth of bunch grass.

No timber.

S.89°51'E., on a random line bet. secs. 1 and 12.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.80.11 Intersect the E. bdy. of the Tp., at the cor. of secs.  
1, 6, 7 and 12, hereinbefore described.

Thence,

N.89°51'W., on a true line bet. secs. 1 and 12.

Over rolling bench land, through dense short undergrowth.

40.055 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in  
the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked:
$$\begin{array}{c} \text{S 1} \\ \hline \frac{1}{4} \\ \hline \text{S 12} \\ \hline 1925 \end{array}$$

Subdivision of T. 23 S., R. 13 W.

Chains.

At the base of the monument, I deposit a limestone, 6x4x2 ins., marked with a cross (X); and dig pits, 18x18x12 ins., E. and W. of post, 3 ft. dist.

80.11 The cor. of secs. 1, 2, 11 and 12.

Land, rolling bench, draining generally to the E. Soil, sandy clay loam.

Undergrowth, sagebrush, shadscale, mountain rush and yellow top.

Fair grazing of bunch grass. No timber.

N.0°01'W., on a random line bet. secs. 1 and 2.

40.00 Set temp. 1/4 sec. cor.

80.14 Intersect the N. bdy. of the Tp., 18 lks. W. of the cor. of secs. 1, 2, 35 and 36, hereinbefore described.

Thence,


S.0°07'W., on a true line bet. secs. 1 and 2.

Over rough, broken and rolling land, through dense short undergrowth; asc. general E. slope 15 ft.

2.20 Rocky spur, projects S.20°E.; desc. SW. slope 135 ft.

13.10 Base of descent or foot of spur, bears NE. and SW.; over rolling bench.

40.14 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for 1/4 sec. cor., with brass cap marked:



and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

42.10 Road bears N.20°E. and S.20°W.

64.10 Dry wash, 15 lks. wide, 2 ft. deep, drains N.60°E.

80.14 The cor. of secs. 1, 2, 11 and 12.

Land, rough, broken, rolling land, and rolling bench, draining easterly; outcroppings and broken ledges of limestone formation.

Subdivision of T. 23 S., R. 13 W.

Chains.

Soil, sandy clay loam; more shallow, gravelly and rocky on the N. 13.10 chs.

Undergrowth, sagebrush, shadscale, mountain rush and yellow top.

Fair growth of bunch grass.

No timber.

From the cor. of secs. 2, 3, 34 and 35, on the S. bdy. of the Tp., which is an iron post, 2 ins. in diam., established, marked and witnessed as described in the official field notes of the survey of T. 24 S., R. 13 W., in this group,

N.0°01'W., bet. secs. 34 and 35.


Over nearly level bench land, through dense short undergrowth.

12.10 Leave bench, bears E. and W.; begin ascent of 180 ft., over S. slope.

22.40 Rocky ridge, bears E. and W.; desc. NE. slope 120 ft.

30.00 Base of descent or foot of ridge, bears NW. and SE.; over nearly level and rolling land to

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins, in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked:




and raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, W. of cor.

Continue over rolling bench to sec. cor.

67.00 Rocky spur, 50 ft. above  $\frac{1}{4}$  sec. cor., projects N.20°W.; desc. 60 ft. to

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 27 ins, in the ground, for cor. of secs. 26, 27, 34 and 35, with brass cap marked:



## Subdivision of T. 23 S., R. 13 W.

- and raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high,  
W. of cor.
- Land, level and rolling benches; rocky ridges and spurs;  
limestone and lava formation; general drainage E.
- Soil, sandy clay loam; more shallow, gravelly and rocky  
on ridges and spurs.
- Undergrowth, sagebrush, shadscale, mountain rush and  
yellow top.
- Fair grazing land.
- No timber.
- 
- S.  $89^{\circ}48'E.$ , on a random line bet. secs. 26 and 35.
- 40.00 Set temp.  $\frac{1}{4}$  sec. cor.
- 79.92 Intersect N. and S. line, 2 lks. N. of the cor. of secs.  
25, 26, 35 and 36.
- Thence,
- N.  $89^{\circ}47'W.$ , on a true line bet. secs. 26 and 35.
- Over rolling bench land, through dense short undergrowth
- 39.96 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in  
the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked:
- |                   |
|-------------------|
| S 26              |
| $\frac{1}{4}$ ——— |
| S 35              |
| 1925              |
- and raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high,  
N. of cor.
- 79.92 The cor. of secs. 26, 27, 34 and 35.
- Land, rolling bench, draining generally to the E.
- Soil, sandy clay loam.
- Undergrowth, sagebrush, shadscale, mountain rush and  
yellow top.
- Fair growth of grass.
- No timber.
- 
- N.  $0^{\circ}01'W.$ , bet. secs. 26 and 27.
- Over rolling bench land, through dense short undergrowth.
- 14.00 Dry wash, 20 lks. wide, 3 ft. deep, drains N.  $70^{\circ}E.$

## Subdivision of T. 23 S., R. 13 W.

Chains.	
40.00	Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked: $\begin{array}{c} \frac{1}{4} \\ \text{S } 27 \quad   \quad \text{S } 26 \\ \hline 1925 \end{array}$ and dig pits, 18x18x12 ins., N. and S. of post, 3 ft. dist.
80.00	Set an iron post, 3 ft. long, 2 ins. in diam., 27 ins. in the ground, for cor. of secs. 22, 23, 26 and 27, with brass cap marked: $\begin{array}{c c} \text{T23S} & \text{R13W} \\ \hline \text{S22} & \text{S23} \\ \hline \text{S27} & \text{S26} \\ \hline .1925 & \end{array}$ and dig pits, 18x18x12 ins., NE., SE., SW. and NW. of post, 3 ft. dist. Land, rolling bench, with general drainage to the E. Soil, sandy clay loam. Undergrowth, sagebrush, shadscale, mountain rush and yellow top. Fair grazing of bunch grass. No timber.
	S.89°47'E., on a random line bet. secs. 23 and 26.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
80.02	Intersect N. and S. line, at the cor. of secs. 23, 24, 25 and 26. Thence, N.89°47'W., on a true line bet. secs. 23 and 26. Over rolling bench land, through dense short undergrowth.
10.00	Base of rocky knoll, bears N. and S.; begin ascent of 210 ft.
22.00	Top of the knoll, bears N. and S.; desc. 110 ft.
30.00	Base of the knoll, bears N. and S.; continue over rolling bench to
40.01	Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in

## Subdivision of T. 23 S., R. 13 W.

## Chains.

the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked:

$$\begin{array}{r} S\ 23 \\ \frac{1}{4} \\ \hline S\ 26 \\ 1925 \end{array}$$

and raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high,  
N. of cor.

From this  $\frac{1}{4}$  sec. cor., begin ascent of 265 ft., over E.  
slope of rocky knoll.

50.60 Top of the knoll, bears N. and S.; desc. abrupt W. slope  
280 ft.

62.00 Base of knoll, bears N. and S.; over rolling bench to

80.02 The cor. of secs. 22, 23, 26 and 27.

Land, rolling bench with rocky knolls; limestone and  
lava formation; general drainage E.

Soil, sandy clay loam; more shallow, gravelly and rocky  
on knolls.

Undergrowth, sagebrush, shadscale, mountain rush and  
yellow top.

Fair growth of bunch grass.

No timber.

N.0°01'W., bet. secs. 22 and 23.

Over rolling bench land, through dense short undergrowth.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins.

in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked:

$$\begin{array}{r} \frac{1}{4} \\ S\ 22 \quad | \quad S\ 23 \\ \hline 1925 \end{array}$$

and dig pits, 18x18x12 ins., N. and S. of post, 3 ft.  
dist.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 27 ins.

in the ground, for cor. of secs. 14, 15, 22 and 23,  
with brass cap marked:

$$\begin{array}{r} T23S \quad | \quad R13W \\ S15 \quad | \quad S14 \\ \hline S22 \quad | \quad S23 \\ 1925 \end{array}$$

## Subdivision of T. 23 S., R. 13 W.

Chains

and raise a mound of stone, 2 ft. base, 1½ ft. high,  
W. of cor.

Land, rolling bench, draining easterly.

Soil, sandy clay loam.

Undergrowth, sagebrush, shadscale, mountain rush and  
yellow top.

Fair grazing land.

No timber.

S.89°47'E., on a random line bet. secs. 14 and 23.

40.00 Set temp. ¼ sec. cor.

79.96 Intersect N. and S. line, 2 lks. S. of the cor. of secs  
13, 14, 23 and 24.

Thence,

N.89°48'W., on a true line bet. secs. 14 and 23.

Over rolling bench land, through dense short undergrowth

39.98 On top of a small knoll, set an iron post, 3 ft. long,  
1 in. in diam., 8 ins. in the ground to solid rock,  
and in a mound of stone, for ¼ sec. cor., with brass  
cap marked:

$$\begin{array}{r} S\ 14 \\ \frac{1}{4} \\ S\ 23 \\ 1925 \end{array}$$

At the base of the monument, I deposit a limestone,

6x6x3 ins., marked with a cross (X).

79.96 The cor. of secs. 14, 15, 22 and 23.

Land, rolling bench with knolls, draining generally to  
the E.

Soil, sandy clay loam; more shallow, gravelly and rocky  
on knolls.

Undergrowth, sagebrush, shadscale, mountain rush and  
yellow top.

Fair growth of grass.

No timber.

## Subdivision of T. 23 S., R. 13 W.

Mains.

N.0°01'W., bet. secs. 14 and 15.

Over rolling bench land, through dense short undergrowth.

49.00

At the base of spur, bearing NE. and SW., set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked:

$$\begin{array}{c} \frac{1}{4} \\ \text{S. 15} \quad | \quad \text{S 14} \\ \hline 1925 \end{array}$$

and raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, W. of cor.

49.30

Low rocky spur, 60 ft. above  $\frac{1}{4}$  sec. cor., projects S.60°W. approximately 10.00 chs. dist.; desc. NW. slope 125 ft.

67.00

Dry wash, 20 lks. wide, 1 ft. deep, in the bottom of swale, drains NE.; asc. gradual SE. slope 60 ft. to

80.00

Set an iron post, 3 ft. long, 2 ins. in diam., 15 ins. in the ground to solid rock, and in a mound of stone, for cor. of secs. 10, 11, 14 and 15, with brass cap marked:

$$\begin{array}{c} \text{T23S} \quad | \quad \text{R13W} \\ \text{S10} \quad | \quad \text{S11} \\ \hline \text{S15} \quad | \quad \text{S14} \\ 1925 \end{array}$$

At the base of the monument, I deposit a limestone, 8x4x4 ins., marked with a cross (X).

Land, rolling bench, draining generally to the NE.; limestone formation.

Soil, sandy clay loam; more shallow, gravelly and rocky on spur.

Undergrowth, sagebrush, shadscale, mountain rush and yellow top.

Fair grazing land.

No timber.

S.89°48'E., on a random line bet. secs. 11 and 14.

40.00

Set temp.  $\frac{1}{4}$  sec. cor.

79.94

Intersect N. and S. line, 7 lks. N. of the cor. of secs.

## Subdivision of T. 23 S., R. 13 W.

Chains.

11, 12, 13 and 14.

Thence,

N.89°45'W., on a true line bet. secs. 11 and 14.

Over rolling bench land, through dense short undergrowth

1.90 Road bears NW. and SE.

39.97 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in  
the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked:
$$\begin{array}{r} \frac{1}{4} \text{ S } 11 \\ \hline \text{S } 14 \\ 1925 \end{array}$$
and raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high,  
N. of cor.67.90 Dry wash, 30 lks. wide, 1 ft. deep, in the bottom of  
swale, 15 ft. below  $\frac{1}{4}$  sec. cor., drains NE.; asc.  
gradual general E. slope 85 ft. to

79.94 The cor. of secs. 10, 11, 14 and 15.

Land, rolling bench with hills and rocky spurs; lime-  
stone formation; general drainage NE.Soil, sandy clay loam; more shallow, gravelly and rocky  
on hills and spurs.Undergrowth, sagebrush, shadscale, mountain rush and  
yellow top.

Fair grazing of bunch grass.

No timber.

N.0°01'W., bet. secs. 10 and 11.

Over rough rolling hills, through dense short under-  
growth; asc. 130 ft. along general E. slope.

16.00 Top of ascent, bears NW. and S.; desc. NE. slope 130 ft.

31.30 Leave rolling hills at the base of descent, bearing NW.  
and SE.; over rolling bench to sec. cor.40.00 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in  
the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked:
$$\begin{array}{r} \frac{1}{4} \\ \text{S } 10 \quad | \quad \text{S } 11 \\ 1925 \end{array}$$

Subdivision of T. 23 S., R. 13 W.

Chains.

and raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, W. of cor.

66.00 Dry wash, 15 lks. wide, 1 ft. deep, drains E.

72.00 Old road bears N.80°W. and S.80°E.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 12 ins. in the ground to solid rock, and in a mound of stone, for cor. of secs. 2, 3, 10 and 11, with brass cap marked:

T23S	R13W
S3	S2
S10	S11
1925	

At the base of the monument, I deposit a limestone, 8x4x2 ins., marked with a cross (X).

Land, rocky rolling hills, and rolling bench, draining generally to the NE.; limestone formation.

Soil, sandy clay loam; more shallow, gravelly and rocky on rolling hills.

Undergrowth, sagebrush, shadscale, mountain rush and yellow top.

Fair growth of bunch grass.

No timber.

S.89°45'E., on a random line bet. secs. 2 and 11.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

79.99 Intersect N. and S. line, 5 lks. N. of the cor. of secs. 1, 2, 11 and 12.

Thence,

N.89°43'W., on a true line bet. secs. 2 and 11.

Over rolling bench land, through dense short undergrowth.

13.00 Road bears N.20°E. and S.30°E.

19.00 Dry wash, 30 lks. wide, 2 ft. deep, drains NE.

33.70 Begin ascent of 90 ft. over general E. slope to

39.995 Set an iron post, 3 ft. long, 1 in. in diam., 9 ins. in the ground to solid rock, and in a mound of stone, for  $\frac{1}{4}$  sec. cor., with brass cap marked:

S 2
$\frac{1}{4}$

## Subdivision of T. 23 S., R. 13 W.

Chains.	
	At the base of the monument, I deposit a limestone, 5x3x2 ins., marked with a cross (X).
56.10	Rocky spur, 165 ft. above $\frac{1}{4}$ sec. cor., projects S.20°W. desc. NW. slope 135 ft.
60.00	Base of descent, bears N.20°E. and S.20°W.; continue over rolling bench to sec. cor.
61.90	Road bears N. and S.
69.00	Dry wash, 15 lks. wide, 1 ft. deep, in the bottom of swale, 15 ft. below foot of spur, drains SE.; asc. 65 ft. to
79.99	The cor. of secs. 2, 3, 10 and 11. Land, rolling bench with hills and rocky spurs; limestone formation; drainage easterly. Soil, sandy clay loam; more shallow, gravelly and rocky on hills and spurs. Undergrowth, sagebrush, shadscale, mountain rush and yellow top. Fair grazing land. No timber.
	N.0°07'E., on a random line bet. secs. 2 and 3.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
79.81	Intersect the N. bdy. of the Tp., 28 lks. E. of the cor. of secs. 2, 3, 34 and 35, hereinbefore described. Thence, S.0°05'E., on a true line bet. secs. 2 and 3. Over rough broken bench land or hills, through dense short undergrowth; desc. 80 ft. along general E. slope
13.80	Dry wash, 15 lks. wide, 1 ft. deep, in the bottom of draw, drains S.20°E.; asc. gradual NE. slope 55 ft. to
39.81	Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in the ground to solid rock, and in a mound of stone, for $\frac{1}{4}$ sec. cor., with brass cap marked:

$\frac{1}{4}$   
 S 3 | S 2

## Subdivision of T. 23 S., R. 13 W.

ains.

At the base of the monument, I deposit a limestone,  
8x6x4 ins., marked with a cross (X).

40.80 Rocky spur, 10 ft. above  $\frac{1}{2}$  sec. cor., projects S.30°E.;  
desc. SW. slope 175 ft.

75.40 Dry wash, 30 lks. wide, 2 ft. deep, in the bottom of  
swale, drains S.80°E.; asc. gradual NE. slope 20 ft.  
to

79.81 The cor. of secs. 2, 3, 10 and 11.

Land, rolling bench; broken with hills and spurs;  
outcroppings of limestone formation; drainage S.,  
thence easterly.

Soil, sandy clay loam; deep in the bottoms of draws and  
swales, but shallow, gravelly and rocky on hills and  
spurs.

Undergrowth, sagebrush, shadscale, mountain rush and  
yellow top.

Fair grazing of bunch grass.

No timber.

---

From the cor. of secs. 3, 4, 33 and 34, on the S. bdy.  
of the Tp., which is an iron post, 2 ins. in diam.,  
established, marked and witnessed as described in the  
official field notes of the survey of T. 24 S., R. 13  
W., in this group,

N.0°02'W., bet. secs. 33 and 34.

Over rolling hills and bench land, through dense short  
undergrowth; asc. gradual SE. slope 75 ft.

21.00 Spur, projects S.10°W.; asc. 25 ft. across the head of  
draw, draining SW.

27.50 Low ridge, bears E. and W.; desc. N. slope 25 ft. to

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 6 ins. in  
the ground to solid rock, and in a mound of stone,  
for  $\frac{1}{2}$  sec. cor., with brass cap marked:

†  
S 33 | S 34

Subdivision of T. 23 S., R. 13 W.

Chains.

At the base of the monument, I deposit a limestone, 6x4x2 ins., marked with a cross (X).

51.30 Road bears NW. and SE.

59.90 Dry wash, 15 lks. wide, 3 ft. deep, in the bottom of swale, 35 ft. below 1/4 sec. cor., drains SE. about 15. chs. dist., thence N.70°E.; asc. gradual SW. slope 22 ft. to

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., over a cross (X) chiseled into surface rock, and in a mound of stone, for cor. of secs. 27, 28, 33 and 34, with brass cap marked:

T23S	R13W
S28	S27
S33	S34
1925	

Land, rolling bench with rocky hills, low spurs and ridges; outcroppings of limestone formation; general drainage easterly.

Soil, sandy clay loam; deep in the bottoms of draws and swales, but shallow, gravelly and rocky on hills, spurs and ridges.

Undergrowth, sagebrush, shadscale and mountain rush. Fair growth of bunch grass.

No timber.

S.89°48'E., on a random line bet. secs. 27 and 34.

40.00 Set temp. 1/4 sec. cor.

80.05 Intersect N. and S. line, 6 lks. S. of the cor. of secs. 26, 27, 34 and 35.

Thence,

N.89°51'W., on a true line bet. secs. 27 and 34.

Over rolling bench land, through dense short undergrowth.

29.00 Dry wash, 20 lks. wide, 3 ft. deep, drains N.70°E.

40.025 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for 1/4 sec. cor., with brass cap marked:

S 27
1/4
S 34
1925

## Subdivision of T. 23 S., R. 13 W.

- and raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high,  
N. of cor.
- 52.90 Road bears N.30°E. and S.30°W.
- 64.00 Begin abrupt ascent of 375 ft. over E. slope.
- 75.10 Rocky spur, projects S.10°E. approximately 20.00 chs.  
dist.; desc. SW. slope 120 ft. to
- 80.05 The cor. of secs. 27, 28, 33 and 34.  
Land, rolling bench with rocky knolls and spurs; drain-  
age easterly; limestone formation.  
Soil, sandy clay loam; more shallow, gravelly and rocky  
on knolls and spurs.  
Undergrowth, sagebrush, shadscale, mountain rush and  
yellow top.  
Fair grazing of bunch grass.  
No timber.
- 
- N.0°02'W., bet. secs. 27 and 28.  
Asc. rough SW. slope 60 ft., through dense short under-  
growth.
- 13.60 Ridge, bears N.20°W. and S.20°E.; asc. 250 ft. along  
general E. slope.
- 36.60 Same ridge, bears N.20°E. and S.20°W.; desc. NW. slope  
25 ft. to
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 20 ins. in  
the ground to solid rock, and in a mound of stone, for  
 $\frac{1}{4}$  sec. cor., with brass cap marked:
- $$\begin{array}{c} \frac{1}{4} \\ | \\ \text{S } 28 \quad | \quad \text{S } 27 \\ | \\ 1925 \end{array}$$
- At the base of the monument, I deposit a limestone,  
8x4x4 ins., marked with a cross (X).
- 56.80 Draw, 195 ft. below  $\frac{1}{4}$  sec. cor., drains W.; asc. S.  
slope 260 ft.
- 75.50 Spur, projects W.; desc. N. slope 15 ft. to
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 10 ins.

Subdivision of T. 23 S., R. 13 W.

Chains.

in the ground to solid rock, and in a mound of stone for cor. of secs. 21, 22, 27 and 28, with brass cap marked:

T23S	R13W
S21	S22
S28	S27
1925	

At the base of the monument, I deposit a limestone, 7x6x5 ins., marked with a cross (X).

Land, low rough mountains; broken ledges and outcroppings of limestone formation; general drainage SE., thence easterly.

Soil, shallow, gravelly and rocky, sandy clay loam.

Undergrowth, sagebrush, shadscale, mountain rush and yellow top.

Fair growth of grass.

No timber.

S.89°51'E., on a random line bet. secs. 22 and 27.

40.00 Set temp. 1/4 sec. cor.

79.96 Intersect N. and S. line, at the cor. of secs. 22, 23, 26 and 27.

Thence,

N.89°51'W., on a true line bet. secs. 22 and 27.

Over rolling bench land, through dense short undergrowth.

19.00 Road bears N.20°W. and S.

39.98 At the base of ridge, bearing N. and S., set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in the ground to solid rock, and in a mound of stone, for 1/4 sec. cor., with brass cap marked:

S 22
1/4
S 27
1925

At the base of the monument, I deposit a limestone, 6x4x2 ins., marked with a cross (X).

From this cor., leave bench, enter rough mountainous land; begin abrupt ascent of 680 ft., over E. slope,

## Subdivision of T. 23 S., R. 13 W.

## Chains.

- 61.00 Ridge, bears N.20°W. and S.20°E.; desc. 250 ft. along N. slope of spur to
- 79.96 The cor. of secs. 21, 22, 27 and 28.  
Land, rolling bench, E.  $\frac{1}{2}$  mile; mountainous and rough with outcroppings and broken ledges of limestone formation, W.  $\frac{1}{2}$  mile; general drainage to the E., E. 61.00 chs.; W. 18.96 chs. drain NW.  
Soil, sandy clay loam; more shallow, gravelly and rocky, on the W.  $\frac{1}{2}$  mile.  
Undergrowth, sagebrush, shadscale, mountain rush and yellow top.  
Fair grazing land.  
No timber.

N.0°02'W., bet. secs. 21 and 22.

Desc. 190 ft. along rough general W. slope, through dense short undergrowth.

- 39.00 Ravine, drains NW.; asc. S. slope 10 ft. to
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 8 ins. in the ground to solid rock, and in a mound of stone, for  $\frac{1}{4}$  sec. cor., with brass cap marked:

$$\begin{array}{c} \frac{1}{4} \\ | \\ \text{S } 21 \quad | \quad \text{S } 22 \\ | \\ 1925 \end{array}$$

At the base of the monument, I deposit a limestone, 10x6x3 ins., marked with a cross (X).

- 44.30 Rocky spur, 45 ft. above  $\frac{1}{4}$  sec. cor., slopes W. about 5.00 chs. dist.; desc. 60 ft.
- 46.10 Ravine, drains W.; asc. 100 ft.
- 50.90 Rocky spur, projects northwesterly; desc. NE. slope 160 ft. to
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 10 ins. in the ground to solid rock, and in a mound of stone, for cor. of secs. 15, 16, 21 and 22, with brass cap marked:

## Subdivision of T. 25 S., R. 13 E.

Chains.

T23S.	R13W
S16	S15
S21	S22
1925	

At the base of the monument, I deposit a limestone,  
6x4x3 ins., marked with a cross (X).

Land, rolling mountainous, draining NW.; rough with out-  
croppings and broken ledges of limestone formation.

Soil, shallow, gravelly and rocky, sandy clay loam.

Undergrowth, sagebrush, shadscale, mountain rush and  
yellow top.

Fair grazing of bunch grass.

No timber.

S.89°51'E., on a random line bet. secs. 15 and 22.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

80.04 Intersect N. and S. line, 9 lks. N. of the cor. of secs.  
14, 15, 22 and 23.

Thence,

N.89°47'W., on a true line bet. secs. 15 and 22.

Over rolling bench land, through dense short undergrowth.

40.02 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in  
the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked:

S 15
$\frac{1}{4}$
S 22
1925

and raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high,  
N. of cor.

51.40 Road bears N.20°W. and S.20°E.

56.40 Leave bench, bears N. and S., and enter mountainous  
land; begin abrupt ascent of 240 ft., over E. slope.

61.40 Ridge, bears S., and N. about 15.00 chs. dist.; desc..  
150 ft. to sec. cor.

67.70 Foot of ridge or base of abrupt descent, bears N. and  
S.; continue more gradual descent over rolling land to

80.04 The cor. of secs. 15, 16, 21 and 22.  
Land, rolling bench, E. 56.40 chs.; rolling and rolling

Subdivision of T. 23 S., R. 13 W.

mins.

mountainous, and rough with outcroppings and broken ledges of limestone formation, W. 23.64 chs.; general drainage E. and NE.

Soil, sandy clay loam; more shallow, gravelly and rocky, on the W. 23.64 chs.

Undergrowth, sagebrush, shadscale, mountain rush and yellow top.

Fair growth of bunch grass.

No timber.


N.0°02'W., bet. secs. 15 and 16.

Desc. general NW. slope 285 ft., through dense short undergrowth.

.19.30 Road bears E. and W.

26.00 Dry wash, 30 lks. wide, 2 ft. deep, in the bottom of swale, drains N.70°E.; asc. gradual S. slope 285 ft. to

40.00 At the base of abrupt ascent, bearing E. and W., set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked:



and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$  ft. high, W. of cor.


51.80 Rocky spur, 290 ft. above  $\frac{1}{4}$  sec. cor., projects easterly; desc. N. slope 285 ft.

65.00 Bottom of descent, bears NE. and SW.; asc. 60 ft.

68.00 Road bears N.70°E. and S. 70°W.

75.40 Rocky spur, projects N.70°E.; desc. NW. slope 60 ft. to

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 27 ins. in the ground, for cor. of secs. 9, 10, 15 and 16, with brass cap marked:



and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$  ft. high,

Subdivision of T. 23 S., R. 13 W.

Chains.

W. of cor.

Land, rolling and rolling mountainous with outcroppings and broken ledges of limestone formation; general drainage NE.

Soil, sandy clay loam; more shallow, gravelly and rocky on the mountainous portions.

Undergrowth, sagebrush, shadscale, mountain rush and yellow top.

Fair grazing land.

No timber.

S.89°47'E., on a random line bet. secs. 10 and 15.

40.00 Set temp. 1/4 sec. cor.

79.92 Intersect N. and S. line, 5 lks. N. of the cor. of secs. 10, 11, 14 and 15.

Thence,

N.89°45'W., on a true line bet. secs. 10 and 15.

Over rough rolling land or hills, through dense short undergrowth; asc. broken E. slope 335 ft.

16.40 Rocky spur, projects S.30°W.; desc. NW. slope 250 ft. to

39.96 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for 1/4 sec. cor., with brass cap marked:

	S 10
1/4	-----
	S 15
	1925

and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor.

69.40 Dry wash, 15 lks. wide, 1 ft. deep, in the bottom of swale, 20 ft. below 1/4 sec. cor., drains SE.; asc. SE. slope 25 ft.

72.50 Road bears NW. and SE.

77.50 Rocky spur, projects N.30°E. about 3.00 chs. dist.; desc. NW. slope 35 ft. to

79.92 The cor. of secs. 9, 10, 15 and 16.

Land, rolling, hills or rolling mountainous with outcroppings of limestone formation; drainage SE., thence

## Subdivision of T. 23 S., R. 13 W.

Stains.

NE.

Soil, sandy clay loam; more shallow, gravelly and rocky,  
on spurs and hills.

Undergrowth, sagebrush, shadscale, mountain rush and  
yellow top.

Fair grazing of bunch grass.

No timber.

N.0°02'W., bet. secs. 9 and 10.

Desc. NW. slope 15 ft., through dense short undergrowth.

1.20 Road bears N.80°E. and W.

4.00 Dry wash, 15 lks. wide, 1 ft. deep, in the bottom of  
swale, drains SE.; asc. gradual SW. slope 40 ft. to

13.00 Begin more abrupt ascent of 100 ft. over S. slope.

25.40 Spur, projects easterly approximately 15.00 chs. dist.;  
desc. N. slope 50 ft. to

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in  
the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked:

$$\begin{array}{c} \frac{1}{4} \\ \text{S. 9} \quad | \quad \text{S 10} \\ \hline 1925 \end{array}$$

and raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high,  
W. of cor.

50.00 Bottom of descent, 80 ft. below  $\frac{1}{4}$  sec. cor., bears E. and  
W.; asc. SW. slope 480 ft.

70.50 Rocky spur, projects SE. about 20.00 chs. dist.; desc.  
steep NE. slope 170 ft. to

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 14 ins.  
in the ground to solid rock, and in a mound of stone,  
for cor. of secs. 3, 4, 9 and 10, with brass cap  
marked:

$$\begin{array}{c} \text{T23S} \quad | \quad \text{R13W} \\ \hline \text{S4} \quad | \quad \text{S3} \\ \hline \text{S9} \quad | \quad \text{S10} \\ \hline 1925 \end{array}$$

At the base of the monument, I deposit a limestone,  
8x6x6 ins., marked with a cross (X).

## Subdivision of T. 23 S., R. 13 W.

## Chains.

Land, rolling and rolling mountainous with outcroppings of limestone formation; drainage SE.

Soil, sandy clay loam; deep in draws and swales, but shallow, gravelly and rocky, on the mountainous portions.

Undergrowth, sagebrush, shadscale, mountain rush and yellow top.

Fair growth of bunch grass.

No timber.

S.89°45'E., on a random line bet. secs. 3 and 10.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

79.94 Intersect N. and S. line; 7 lks. S. of the cor. of secs 2, 3, 10 and 11.

Thence,

N.89°48'W., on a true line bet. secs. 3 and 10.

Over rolling land, through dense short undergrowth; asc. gradual NE. slope 60 ft. to

17.00 Begin more abrupt ascent of 225 ft., over NE. slope to

39.97 Set an iron post, 3 ft. long, 1 in. in diam., 8 ins. in the ground to solid rock, and in a mound of stone, for  $\frac{1}{4}$  sec. cor., with brass cap marked:

$$\begin{array}{r} S 3 \\ \hline S 10 \\ 1925 \end{array}$$

At the base of the monument, I deposit a limestone, 4x4x3 ins., marked with a cross (X).

62.00 Rocky spur, 350 ft. above  $\frac{1}{4}$  sec. cor., projects southeasterly; desc. SW. slope 100 ft.

76.00 Ravine, drains SE.; asc. NE. slope 120 ft. to

79.94 The cor. of secs. 3, 4, 9 and 10.

Land, rolling and rolling mountainous, draining SE.; rough with outcroppings and broken ledges of limestone formation.

Soil, sandy clay loam; more shallow, gravelly and rocky, on the mountainous portions.

Subdivision of T. 23 S., R. 13 W.

ains.

Undergrowth, sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing of bunch grass.

N.0°06'W., on a random line bet. secs. 3 and 4.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

79.86 Intersect the N. bdy. of the Tp., 14 lks. E. of the cor. of secs. 3, 4, 33 and 34, hereinbefore described.

Thence,


S.0°12'E., on a true line bet. secs. 3 and 4.

Over rough rolling mountains, through dense short undergrowth; asc. general E. slope 180 ft.

17.60 Rocky spur from NW., projects E. about 7.00 chs. dist.; desc. steep S. slope 250 ft.

32.50 Ravine, drains E.; asc. N. slope 50 ft. to

39.86 Set an iron post, 3 ft. long, 1 in. in diam., over a cross (X) chiseled into surface rock, and in a mound of stone, for  $\frac{1}{4}$  sec. cor., with brass cap marked:



50.50 Rocky spur from NW., 210 ft. above  $\frac{1}{4}$  sec. cor., projects E. approximately 10.00 chs. dist., thence southeasterly; desc. SW. slope 350 ft.

72.40 Ravine, drains SE.; asc. NE. slope 30 ft. to

79.86 The cor. of secs. 3, 4, 9 and 10.

Land, rolling and rolling mountainous, draining SE.; outcroppings and broken ledges of limestone formation. Soil, sandy clay loam; shallow, gravelly and rocky on spurs.

Undergrowth, sagebrush, shadscale, mountain rush and yellow top.

Fair grazing land.

No timber.

## Subdivision of T. 23 S., R. 13 W.

## Chains.

From the cor. of secs. 4, 5, 32 and 33, on the S. bdy. of the Tp., which is an iron post, 2 ins. in diam., established, marked and witnessed as described in the official field notes of the survey of T. 24 S., R. 13 W., in this group,

N.0°03'W., bet. secs. 32 and 33.

Over rolling land, through dense short undergrowth,

2.50 Base of ascent or foot of spur, bears E. and W.; asc. 240 ft. over SE. slope.

38.00 Spur, projects SW.; desc. NW. slope 15 ft. to.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 8 ins. in the ground to solid rock, and in a mound of stone, for  $\frac{1}{4}$  sec. cor., with brass cap marked:

	$\frac{1}{4}$	
S. 32		S 33
	1925	

At the base of the monument, I deposit a blue limestone, 18x8x6 ins., marked with a cross (X).

From this cor., desc. 140 ft. along rough broken general W. slope to

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 8 ins. in the ground to solid rock, and in a mound of stone, for cor. of secs. 28, 29, 32 and 33, with brass cap marked:

T23S		R13W
S29		S28
S32		S33
	1925	

At the base of the monument, I deposit a limestone, 7x5x4 ins., marked with a cross (X).

Land, rolling and rolling mountainous, draining generally to the SE.; limestone exposed in the form of outcroppings and broken ledges.

Soil, sandy clay loam; more shallow, gravelly and rocky, on the mountainous portions.

Undergrowth, sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair growth of bunch grass.

## Subdivision of T. 28 S., R. 13 W.

8 ins.

S. 89°48'E., on a random line bet. secs. 28 and 33.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.79.91 Intersect N. and S. line, 2 lks. S. of the cor. of secs.  
27, 28, 33 and 34.

Thence,

N. 89°49'W., on a true line bet. secs. 28 and 33.

Desc. rough SW. slope 250 ft., through dense short under-  
growth.

8.70 Descent becomes more gradual.

17.30 Dry wash, 15 lks. wide, 3 ft. deep; in the bottom of  
swale, drains SE.; asc. general E. slope 60 ft. to  $\frac{1}{4}$   
sec. cor.

24.90 Road bears NW. and SE.

39.955 Set an iron post, 3 ft. long, 1 in. in diam., 8 ins. in  
the ground to solid rock, and in a mound of stone, for  
 $\frac{1}{4}$  sec. cor., with brass cap marked:

S 28
<hr style="width: 50%; margin: 0 auto;"/>
S 33
1925

At the base of the monument, I deposit a limestone,  
8x8x6 ins., marked with a cross (X).42.60 Spur, 15 ft. above  $\frac{1}{4}$  sec. cor., projects N. about 6.00  
chs. dist.; desc. 75 ft.

47.40 Draw, drains N.; asc. 100 ft.

53.90 Rocky spur, projects N. approximately 8.00 chs. dist.;  
desc. 80 ft.

62.10 Draw, drains N.; asc. 40 ft.

67.10 Ridge, bears N. 70°W. and S. 70°E.; desc. SW. slope 40 ft.  
to

79.91 The cor. of secs. 28, 29, 32 and 33.

Land, rolling and low rolling mountainous, draining gener-  
ally to the SE.; limestone exposed in the form of  
outcroppings and broken ledges.Soil, sandy clay loam; deep in the bottoms of draws and  
swales, but shallow, gravelly and rocky, on spurs and  
ridges.

Subdivision of T. 23 S., R. 13 W.

Chains.

Undergrowth, sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair growth of grass.


N.0°03'W., bet. secs. 28 and 29.

Over rolling land or hills, through dense short undergrowth; desc. 70 ft. along SW. slope.

23.00 Base of descent, bears NE. and SW.; over rolling bench land to sec. cor.

24.00 Road bears N,40°E. and S,20°W.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for 1/4 sec. cor., with brass cap marked;




and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

40.20 Road bears NW. and SE.

52.00 Dry wash, 15 lks. wide, 2 ft. deep, in the bottom of swale, drains SE.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 27 ins. in the ground, for cor. of secs. 20, 21, 28 and 29, with brasscap marked:



and raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Land, rolling or hills, S. 23.00 chs.; rolling bench, N. 57.00 chs.; general drainage SE.; limestone formation. Soil, sandy clay loam; more shallow, gravelly and rocky, on the S. 23.00 chs.

Undergrowth, sagebrush, shadscale, mountain rush and yellow top.

Fair grazing land.

## Subdivision of T. 23 S., R. 13 W.

chains.

No timber.

S. 89° 49' E., on a random line bet. secs. 21 and 28.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

80.00 Intersect N. and S. line, 5 lks. S. of the cor. of secs. 21, 22, 27 and 28.

Thence,

N. 89° 51' W., on a true line bet. secs. 21 and 28.

Over rough low rolling mountains, through dense short undergrowth; desc. 60. ft. along N. slope of spur.

28.80 Top of the spur, projects NW. approximately 30.00 chs. dist.; desc. abrupt SW. slope 290 ft. to

38.00 Base of descent or foot of spur, bears N. 20° W. and S. 20° E.; over rolling bench land to sec. cor.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked:
$$\frac{1}{4} \frac{S \ 21}{S \ 28}$$

1925

and raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$  ft. high, N. of cor.

60.30 Road bears N. and S.

80.00 The cor. of secs. 20, 21, 28 and 29.

Land, low rolling mountains and rough with outcroppings and broken ledges of limestone formation, E. 38.00 chs.; rolling bench, W. 42.00 chs.; drainage NW., thence northeasterly, E. 28.80 chs.; W. 51.20 chs. drain generally to the SE.

Soil, sandy clay loam; more shallow, gravelly and rocky, on the mountainous portion.

Undergrowth, sagebrush, shadscale, mountain rush and yellow top.

Fair grazing of bunch grass.

No timber.

## Subdivision of T. 23 S., R. 13 W.

Chains.

N.0°03'W., bet. secs. 20 and 21.

Over rolling bench land, through dense short undergrowth

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in  
the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked:

$$\begin{array}{c} \frac{1}{4} \\ \text{S } 20 \text{ | S } 21 \\ \hline 1925 \end{array}$$

and raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high,  
W. of cor.

55.70 Road bears N.70°E. and S.70°W.

76.40 Road bears N.30°W. and S.30°E.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 27 ins.  
in the ground, for cor. of secs. 16, 17, 20 and 21,  
with brass cap marked:

$$\begin{array}{c} \text{T23S | R13W} \\ \text{S17 | S16} \\ \hline \text{S20 | S21} \\ 1925 \end{array}$$

and raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high,  
W. of cor.

Land, rolling bench, draining S.

Soil, sandy clay loam.

Undergrowth, sagebrush, shadscale, mountain rush and  
yellow top.

Fair growth of grass.

No timber.

S.89°51'E., on a random line bet. secs. 16 and 21.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

79.86 Intersect N. and S. line, 5 lks. S. of the cor. of secs.  
15, 16, 21 and 22.

Thence,

N.89°53'W., on a true line bet. secs. 16 and 21.

Over low rolling mountains, through dense short under-  
growth; asc. E. slope 90 ft.

17.90 Rocky spur, projects N. about 5.00 chs. dist.; desc. W.  
slope 70 ft.

Subdivision of T. 23 S., R. 13 W.

Chains.

- 29.90 Dry wash, 30 lks. wide, 3 ft. deep, in the bottom of swale, drains N.30°E.; asc. SE. slope 155 ft.
- 23.90 Road bears N.80°E. and S.80°W.
- 27.60 Spur, slopes S. about 3.00 chs. dist.; desc. W. slope 60 ft. to
- 30.60 Leave mountainous land at the base of descent or foot of spur, bearing NW. and SE.; over rolling land to sec. cor.
- 39.93 Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in the ground to solid rock, and in a mound of stone, for  $\frac{1}{4}$  sec. cor., with brass cap marked:

$\frac{1}{4}$   $\frac{S\ 16}{S\ 21}$   
 1925

At the base of the monument, I deposit a sandstone, 8x6x6 ins., marked with a cross (X).

50.40 Dry wash, 45 lks. wide, 2 ft. deep, drains S.70°E.

79.86 The cor. of secs. 16, 17, 20 and 21.

Land, low rolling mountains, E. 30.60 chs.; rolling, remainder of mile; sandstone and limestone formation; general drainage NE.

Soil, sandy clay loam; shallow, gravelly and rocky, on spurs.

Undergrowth, sagebrush, shadscale, mountain rush and yellow top.

Fair grazing land.

No timber.

N.0°03'W., bet. secs. 16 and 17.

Over rolling bench land, through dense short undergrowth.

20.00 Base of ascent or foot of low ridge, bears N.20°W. and S.20°E.; asc. 175 ft, along general W. slope to

40.00 Set an iron post, 3 ft. long, 1 in. in diam., over a cross (X) chiseled into surface rock, and in a large mound of stone, for  $\frac{1}{4}$  sec. cor., with brass cap marked:

$\frac{1}{4}$   
 S17 | S16

Subdivision of T. 23 S., R. 13 W.

Chains.

- 44.50 Low ridge, 15 ft. above  $\frac{1}{2}$  sec. cor., bears NW. and SE.; desc. NE. slope 155 ft.
- 45.00 Base of descent or foot of ridge, bears E. and W.; continue over rolling bench land to sec. cor.
- 45.00 Road bears E. and W.
- 70.00 Dry wash, 15 lks. wide, 1 ft. deep, drains S.30°E.
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 27 ins. in the ground, for cor. of secs. 8, 9, 16 and 17, with brass cap marked:

T23S	R13W
S8	S9
S17	S16
1925	

and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

Land, rolling bench with low ridge which is rough with outcroppings and broken ledges of limestone formation; general drainage SE.

Soil, sandy clay loam; shallow, gravelly and rocky, on low ridge.

Undergrowth, sagebrush, shadscale, mountain rush and yellow top.

Fair growth of bunch grass.

No timber.

S.89°53'E., on a random line bet. secs. 9 and 16.

- 40.00 Set temp.  $\frac{1}{2}$  sec. cor.
- 40.00 Intersect N. and S. line, 2 lks. S. of the cor. of secs. 9, 10, 15 and 16.

Thence,

N.89°54'W., on a true line bet. secs. 9 and 16.

Over gently rolling or nearly level bench land, through dense short undergrowth.

- 9.00 Road bears N.70°E. and S.70°W.
- 25.00 Leave gently rolling or nearly level land, bears N. and S.60°W.; begin ascent of 155 ft., over general S. slope of spur to

Subdivision of T. 23 S., R. 13 W.

Chains.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 8 ins. in the ground to solid rock, and in a mound of stone, for  $\frac{1}{4}$  sec. cor., with brass cap marked:

$\frac{1}{4}$   $\frac{S\ 9}{S\ 16}$   
 1925

At the base of the monument, I deposit a limestone, 10x8x8 ins., marked with a cross (X).

45.00 Top of ascent on S. slope, 15 ft. above  $\frac{1}{4}$  sec. cor.; desc. 110 ft. along broken S. slope of the spur to

65.00 Base of descent, bears N.30°W. and S.30°E.; over rolling bench land to

80.00 The cor. of secs. 8, 9, 16 and 17.

Land, nearly level and rolling bench, and S. slope of spur with outcroppings and broken ledges of limestone formation; drainage to the SE.

Soil, sandy clay loam; more shallow, gravelly and rocky, on the S. slope of spur.

Undergrowth, sagebrush, shadscale, mountain rush and yellow top.

Fair grazing land.

No timber.

N.0°03'W., bet. secs. 8 and 9.

Over rolling bench land, through dense short undergrowth.

10.00 Leave bench, bears NW. and SE.; begin ascent of 230 ft., over broken SW. slope to

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 6 ins. in the ground to solid rock, and in a mound of stone, for  $\frac{1}{4}$  sec. cor., with brass cap marked:

$\frac{1}{4}$   
 S 8 | S 9  
 1925

At the base of the monument, I deposit a limestone, 8x8x3 ins., marked with a cross (X).

54.90 Spur, 60 ft. above  $\frac{1}{4}$  sec. cor., projects E. about 10.00

## Subdivision of T. 23 S., R. 13 W.

Chains.

chs. dist., thence southeasterly; desc. N. slope 80 ft

77.30 Road bears N.30°W. and SE.

77.50 Ravine, drains SE.; asc. SW. slope 50 ft. to

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 6 ins. in  
the ground to solid rock, and in a mound of stone,  
for cor. of secs. 4, 5, 8 and 9, with brass cap  
marked:

T23S	R13W
S5	S4
S8	S9
1925	

At the base of the monument, I deposit a limestone,  
8x7x3 ins., marked with a cross (X).

Land, rolling bench, S. 10.00 chs.; rolling hills or  
low rolling mountains with outcroppings and broken  
ledges of limestone formation, N. 70.00 chs.; drainage  
to the SE.

Soil, sandy clay loam; deep on bench and in the bottom  
of ravine, but shallow, gravelly and rocky, on the  
hills and mountainous portion.

Undergrowth, sagebrush, shadscale, mountain rush and  
yellow top.

Fair grazing of bunch grass.

No timber.

S.89°54'E., on a random line bet. secs. 4 and 9.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.80.07 Intersect N. and S. line, 9 lks. N. of the cor. of secs.  
3, 4, 9 and 10.

Thence,

N.89°50'W., on a true line bet. secs. 4 and 9.

Over rolling or low rolling mountainous land, through  
dense short undergrowth; asc. NE. slope 200 ft.

10.60 Rocky spur, projects S.30°E.; desc. SW. slope 430 ft. to

40.035 Set an iron post, 3 ft. long, 1 in. in diam., 16 ins. in  
the ground to solid rock, and in a mound of stone, for  
 $\frac{1}{4}$  sec. cor., with brass cap marked:

Subdivision of T. 23 S., R. 13 W.

Chains.

S 4
¼
S 9
1925

At the base of the monument, I deposit a limestone, 6x4x3 ins., marked with a cross (X).

42.70 Ravine, 15 ft. below ¼ sec. cor., drains S.; asc. broken general E. slope 100 ft.

70.10 Spur, projects S. approximately 7.00 chs. dist.; desc. general SW. slope 160 ft. to

80.07 The cor. of secs. 4, 5, 8 and 9.  
Land, rolling and low rolling mountains, draining SE.; limestone exposed in the form of outcroppings and broken ledges.

Soil, sandy clay loam; more shallow, gravelly and rocky, on spurs.

Undergrowth, sagebrush, shadscale, mountain rush and yellow top.

Fair growth of grass.

No timber.

N.0°13'W., on a random line bet. secs. 4 and 5.

40.00 Set temp. ¼ sec. cor.

79.74 Intersect the N. bdy. of the Tp., 4 lks. W. of the cor. of secs. 4, 5, 32 and 33, hereinbefore described.

Thence,

S.0°11'E., on a true line bet. secs. 4 and 5.

Over rough low rolling mountainous land, through dense short undergrowth; desc. S. slope 160 ft.

6.90 Ravine, from SE., drains W.; asc. abrupt NW. slope 155 ft.

14.50 Rocky spur, projects southwesterly; desc. SE. slope 310 ft. to


39.74 Set an iron post, 3 ft. long, 1 in. in diam., 16 ins. in the ground to solid rock, and in a mound of stone, for ¼ sec. cor., with brass cap marked:

¼
S 5
S 4
1925

## Subdivision of T. 23 S., R. 13 W.

## Chains.

- At the base of the monument, I deposit a limestone, 10x4x4 ins., marked with a cross (X).
- 61.70 Ravine, 80 ft. below  $\frac{1}{4}$  sec. cor., drains SE. about 5.00 chs. dist., thence SW.; asc. 40 ft.
- 69.40 Rocky spur, projects SE. about 5.00 chs. dist.; desc. 165 ft.
- 77.70 Ravine, drains SW.; asc. W. slope 25 ft. to
- 79.74 The cor. of secs. 4, 5, 8 and 9.
- Land, low rolling mountains with outcroppings and broken ledges of limestone formation; general drainage SE.
- Soil, sandy clay loam; shallow, gravelly and rocky, on spurs.
- Undergrowth, sagebrush, shadscale, mountain rush and yellow top.
- Fair grazing land.
- No timber.
- 
- From the cor. of secs. 5, 6, 31 and 32, on the S. bdy. of the Tp., which is an iron post, 2 ins. in diam., established, marked and witnessed as described in the official field notes of the survey of T. 24 S., R. 13 W., in this group,
- N.0°03'W., bet. secs. 31 and 32.
- Over rough broken mountainous land, through a scattering growth of timber and dense short undergrowth; desc. NE. slope 100 ft.
- 11.00 Dry wash, 20 lks. wide, 2 ft. deep, in the bottom of ravine, drains S.30°E.; asc. 205 ft.
- 25.40 Spur, projects SE.; desc. 200 ft.
- 38.40 Ravine, drains SE.; asc. abrupt SW. slope 35 ft. to
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 8 ins. in the ground to solid rock, and in a mound of stone, for  $\frac{1}{4}$  sec. cor., with brass cap marked:



## Subdivision of T. 23 S., R. 13 W.

## Chains.

At the base of the monument, I deposit a limestone,  
6x4x4 ins., marked with a cross (X).

- 44.00 Rocky spur, 145 ft. above  $\frac{1}{4}$  sec. cor., projects SE.  
approximately 12.00 chs. dist.; desc. gradually 50 ft.
- 53.00 Ravine, drains SE.; asc. abrupt. rough general S. slope  
410 ft.
- 70.00 Rocky spur, projects E. approximately 15.00 chs. dist.;  
desc. 45 ft. over N. slope to
- 80.00 Set an iron post, 3 ft. long, 2 ins. in diam., over a  
cross (X) chiseled into surface rock, and in a large  
mound of stone, for cor. of secs. 29, 30, 31 and 32,  
with brass cap marked:

T23S	R13W
S30	S29
S31	S32
1925	

from which,

A cedar, 3 ins. diam., bears S.16°W., 118  
lks. dist., marked B T.

A cedar, 3 ins. diam., bears N.73°W., 86  
lks. dist., marked B T.

There are no other trees available suitable for marking.

Land, rough broken and rolling mountains, draining gen-  
erally to the SE.; outcroppings and broken ledges of  
limestone formation.

Soil, sandy clay loam; shallow, gravelly and rocky, on  
spurs.

Undergrowth, sagebrush, shadscale, mountain rush and  
yellow top.

Fair grazing of bunch grass.

Timber, scattering growth of scrubby cedar.

S.89°48'E., on a random line bet. secs. 29 and 32.

- 40.00 Set temp.  $\frac{1}{4}$  sec. cor.
- 80.10 Intersect N. and S. line, 12 lks. S. of the cor. of secs.  
28, 29, 32 and 33.

Thence,

## Subdivision of T. 23 S., R. 13 W.

## Chains.

N.89°53'W., on a true line bet. secs. 29 and 32.

Over nearly level and gently rolling land, through dense short undergrowth.

14.00 Road bears N.20°E. and S.20°W.

40.05 Set an iron post, 3 ft. long, 1 in. in diam., 8 ins. in the ground to solid rock, and in a mound of stone, for  $\frac{1}{4}$  sec. cor., with brass cap marked:

$\frac{1}{4}$	S 29
$\frac{1}{4}$	S 32
	1925

At the base of the monument, I deposit a limestone, 5x5x3 ins., marked with a cross (X).

From this cor., begin abrupt ascent of 650 ft., over rough E. slope.

61.10 Ledgy rim or top of abrupt ascent, bears N. and S.; desc. NW. slope 80 ft.

71.10 Head of draw, drains NE.; asc. abruptly 180 ft., along rough N. slope to

80.10 The cor. of secs. 29, 30, 31 and 32.

Land, nearly level and rolling, E.  $\frac{1}{2}$  mile; abrupt and mountainous with outcroppings and broken ledges of limestone formation, W.  $\frac{1}{2}$  mile; drainage NE., thence SE. Soil, sandy clay loam; deep on the E.  $\frac{1}{2}$  mile, but more shallow, gravelly and rocky, on the W.  $\frac{1}{2}$  mile.

Undergrowth, sagebrush, shadscale, mountain rush and yellow top.

Fair growth of bunch grass.

Timber, a few scrubby cedar on the mountainous portion.

N.89°48'W., on a random line bet. secs. 30 and 31.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

77.73 Intersect the W. bdy. of the Tp., 13 lks. S. of the cor. of secs. 25, 30, 31 and 36, which is an iron post, 3 ins. in diam., extending 24 ins. above ground, firmly set in a mound of earth and stone, 5 ft. base,  $1\frac{1}{2}$  ft. high, correctly marked, and witnessed on the W. by a

## Subdivision of T. 23 S., R. 13 W.

Chains.

mound of stone,  $2\frac{1}{2}$  ft. base,  $1\frac{1}{2}$  ft. high.

Thence,

S.  $89^{\circ}42'E.$ , on a true line bet. secs. 30 and 31.

Asc. rough SW. slope 700 ft., through dense short undergrowth.

31.30 Main ridge or divide, bears N.  $20^{\circ}W.$  and S.  $20^{\circ}E.$ ; desc. steep general N. slope 45 ft. to

37.73 True point for  $\frac{1}{4}$  sec. cor. falls on a broken ledge, where it is impracticable to set an iron post or mark a cross (X).

37.91 Set an iron post, 3 ft. long, 1 in. in diam., over a cross (X) chiseled into surface rock, and in a mound of stone, for witness  $\frac{1}{4}$  sec. cor., with brass cap marked:

$$\begin{array}{r} \text{WC } \frac{1}{4} \frac{\text{S } 30}{\text{S } 31} \\ 1925 \end{array}$$

52.30 Head of ravine, 245 ft. below the true point for the  $\frac{1}{4}$  sec. cor., drains N.  $30^{\circ}W.$ ; asc. 200 ft., over NW. slope

62.50 Spur, projects N.  $10^{\circ}E.$ ; desc. 60 ft.

65.80 Head of ravine, drains NE.; asc. 20 ft.

76.00 Rocky spur, projects N.  $30^{\circ}E.$ ; desc. 15 ft. along general N. slope to

77.73 The cor. of secs. 29, 30, 31 and 32.

Land, rough mountains with limestone outcroppings and broken ledges; drainage SW., W. 31.30 chs.; remainder of mile drains NE.

Soil, shallow, gravelly and rocky, sandy clay loam.

Undergrowth, sagebrush, shadscale, mountain rush and yellow top.

Fair to good grazing land.


Timber, a scattering growth of scrubby cedar.

N.  $0^{\circ}03'W.$ , bet. secs. 29 and 30.


Over rough mountainous land, through dense short undergrowth; asc. 15 ft. across the head of draw, draining NE.

## Subdivision of T. 23 S., R. 13 W.

- Chains.
- 2.00 Rocky spur; projects N.30°E.; desc. 245 ft.
- 17.20 Ravine, drains NE.; asc. 120 ft.
- 27.70 Spur, projects NE.; desc. 100 ft. along general E. slope  
to
- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., over a  
cross (X) chiseled into surface rock, and in a mound  
of stone, for  $\frac{1}{4}$  sec. cor., with brass cap marked:



- 69.00 Ravine, 350 ft. below  $\frac{1}{4}$  sec. cor., drains NE.; asc. 60  
ft.
- 73.40 Spur, slopes NE. about 3.00 chs. dist.; desc. 80 ft. to
- 80.00 On a N. slope, set an iron post, 3 ft. long, 2 ins. in  
diam., 8 ins. in the ground to solid rock, and in a  
mound of stone, for cor. of secs. 19, 20, 29 and 30,  
with brass cap marked:



At the base of the monument, I deposit a limestone,  
6x4x4 ins., marked with a cross (X).

Land, mountainous with outcroppings and broken ledges of  
limestone formation; drainage NE. to swale, thence SE.  
Soil; sandy clay loam; deep in the bottoms of draws and  
ravines, but more shallow, gravelly and rocky, on spurs  
Undergrowth, sagebrush, shadscale, mountain rush and  
yellow top.

Fair grazing land.

Timber, sparse growth of scrubby cedar.

- S.89°53'E., on a random line bet. secs. 20 and 29.
- 40.00 Set temp.  $\frac{1}{4}$  sec. cor.
- 80.11 Intersect N. and S. line, 14 lks. N. of the cor. of secs.  
20, 21, 28 and 29.
- Thence,

## Subdivision of T. 23 S., R. 13 W.

## Chains.

N.89°47'W., on a true line bet. secs. 20 and 29.

Over rolling bench land, through dense short undergrowth.

20.10 Dry wash, 20 lks. wide, 1 ft. deep, drains S.

40.055 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked:

$$\frac{1}{4} \frac{S 20}{S 29} \\ 1925$$

and raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, N. of cor.

56.20 Road bears N. and S.

61.40 Dry wash, 15 lks. wide, 3 ft. deep, in the bottom of swale, drains SE.; asc. gradually 60 ft., along general N. slope to sec. cor.

66.60 Road bears N.80°W. and SE.

80.11 The cor. of secs. 19, 20, 29 and 30.

Land, rolling bench, draining SE.

Soil, sandy clay loam.

Undergrowth, sagebrush, shadscale, mountain rush and yellow top.

Fair grazing of bunch grass.

No timber.

N.89°42'W., on a random line bet. secs. 19 and 30.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

77.80 Intersect the W. bdy. of the Tp., at the cor. of secs. 19, 24, 25 and 30, which is an iron post, 3 ins. in diam., extending 24 ins. above ground, firmly set in a mound of earth and stone, 5 ft. base, 1 ft. high, correctly marked, and witnessed on the W. by a mound of stone,  $2\frac{1}{2}$  ft. base, 2 ft. high.

Thence,

S.89°42'E., on a true line bet. secs. 19 and 30.

Over mountainous land, through dense short undergrowth; asc. broken SW. slope 255 ft.

## Subdivision of T. 23 S., R. 13 W.

## Chains.

- 32.00 Main ridge or divide, bears N.20°W. and S.20°E.; desc. general E. slope 115 ft. to
- 37.80 At the foot of ridge or base of abrupt descent, bearing N. and S., set an iron post, 3 ft. long, 1 in. in diam., 14 ins. in the ground to solid rock, and in a mound of stone, for  $\frac{1}{4}$  sec. cor., with brass cap marked:

$$\frac{1}{4} \frac{S 19}{S 30} \\ 1925$$

At the base of the monument, I deposit a limestone, 6x4x2 ins., marked with a cross (X).

- 42.90 Dry wash, 15 lks. wide, 2 ft. deep, in the bottom of ravine from S., 25 ft. below  $\frac{1}{4}$  sec. cor., drains NE.; asc. gradually 50 ft., along general N. slope to

- 77.80 The cor. of secs. 19, 20, 29 and 30.

Land, rolling, and rolling and broken mountains with outcroppings of limestone formation; drainage SW., W. 32.00 chs.; remainder of mile drains NE. into swale, thence SE.

Soil, sandy clay loam; more shallow, gravelly and rocky, on the W. 37.80 chs.

Undergrowth, sagebrush, shadscale, mountain rush and yellow top.

Fair to good growth of bunch grass.

Timber, a scattering growth of scrubby cedar.

N.0°03'W., bet. secs. 19 and 20.

Over rolling land, through dense short undergrowth.

- 2.40 Road bears N.80°W. and S.80°E.

- 7.10 Dry wash, 15 lks. wide, 2 ft. deep, in the bottom of swale, 30 ft. below sec. cor., drains S.70°E.; asc. gradually 25 ft. to  $\frac{1}{4}$  sec. cor., over SW. slope.


- 22.40 Road bears N.70°E. and S.70°W.

- 40.00 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in

## Subdivision of T. 23 S., R. 13 W.

Chains.

the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked:




and raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, W. of cor.

54.90 Low spur, projects SE. about 10.00 chs. dist.

78.00 Rocky spur, 440 ft. above  $\frac{1}{4}$  sec. cor., projects SE. approximately 20.00 chs. dist.; desc. NE. slope 15 ft. to

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 10 ins. in the ground to solid rock, and in a mound of stone, for cor. of secs. 17, 18, 19 and 20, with brass cap marked:



At the base of the monument, I deposit a limestone, 6x6x4 ins., marked with a cross (X).

Land, rolling, draining SE.; outcroppings of limestone formation on spurs.

Soil, sandy clay loam; more shallow, gravelly and rocky, on spurs.

Undergrowth, sagebrush, shadscale, mountain rush and yellow top.

Fair grazing land.

No timber.

S.89°47'E., on a random line bet. secs. 17 and 20.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

80.16 Intersect N. and S. line, 12 lks. N. of the cor. of secs. 16, 17, 20 and 21.

Thence,

N.89°42'W., on a true line bet. secs. 17 and 20.

Over rolling bench land, through dense short undergrowth.

## Subdivision of T. 23 S., R. 13 W.

Chains.	
1.20	Road bears N.20°W. and S.20°E.
25.60	Road bears NE. and SW.
40.08	Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked
	$\begin{array}{r} S\ 17 \\ \frac{1}{4} \\ \hline S\ 20 \\ 1925 \end{array}$
	and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.
45.20	Dry wash; 15 lks. wide, 1 ft. deep, drains S.30°E.
52.20	Leave nearly level and rolling bench, bears NE. and S.; begin ascent of 370 ft., over rough NE. slope to
80.16	The cor. of secs. 17, 18, 19 and 20.
	Land, nearly level and rolling bench, E. 52.20 chs.; rough NE. slope of spur, W. 27.96 chs.; limestone formation; general drainage SE.
	Soil, sandy clay loam; more shallow, gravelly and rocky, on the NE. slope of spur.
	Undergrowth, sagebrush, shadscale, mountain rush and yellow top.
	Fair to good growth of grass.
	No timber.
	N.89°42'W., on a random line bet. secs. 18 and 19.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
77.73	Intersect the W. bdy. of the Tp., 11 lks. N. of the cor. of secs. 13, 18, 19 and 24, which is an iron post, 3 ins. in diam., extending 24 ins. above ground, firmly set in a mound of stone, 5 ft. base, 1 ft. high, correctly marked, and witnessed on the W. by a mound of stone, $2\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high.
	Thence,
	S.89°47'E., on a true line bet. secs. 18 and 19.
	Asc. rough general W. slope 60 ft., through dense short undergrowth.
7.00	Main ridge or divide, bears N. and S.; desc. broken E.

## Subdivision of T. 23 S., R. 13 W.

Chains.

slope 690 ft.

25.70 Ravine, drains S.10°W.; asc. W. slope 300 ft. to

37.73 Set an iron post, 3 ft. long, 1 in. in diam., 10 ins. in the ground to solid rock, and in a mound of stone, for  $\frac{1}{4}$  sec. cor., with brass cap marked:
$$\begin{array}{r} S\ 18 \\ \frac{1}{4} \\ \hline S\ 19 \\ 1925 \end{array}$$

At the base of the monument, I deposit a limestone, 12x8x6 ins., marked with a cross (X).

47.10 Rocky spur, 75 ft. above  $\frac{1}{4}$  sec. cor., projects S. about 25.00 chs. dist.; desc. 330 ft. to the top of spur, across the head of draw, draining S.

75.70 Rocky spur forks N. and S.70°E.; desc. NE. slope 55 ft. to

77.73 The cor. of secs. 17, 18, 19 and 20.

Land, mountainous with outcroppings and broken ledges of limestone formation; drainage SW., W. 7.00 chs.; E. 70.73 chs. drain generally to the SE.

Soil, sandy clay loam; deep in the bottoms of draws and ravines, but more shallow, gravelly and rocky on spurs and main ridge.

Undergrowth, sagebrush, shadscale, mountain rush and yellow top; scattering growth of buck brush.

Fair growth of bunch grass.

No timber.

N.0°03'W., bet. secs. 17 and 18.

Over rough mountainous land, through dense short undergrowth; desc. NE. slope 15 ft.

2.50 Bottom of descent, bears NE. and SE.; asc. SE. slope 40 ft.

5.00 Spur, projects N.80°E. about 10.00 chs. dist.; desc. broken N. slope 180 ft.

20.50 Dry wash, 10 lks. wide, 1 ft. deep, in the bottom of draw, drains E.; asc. SW. slope 190 ft. to

## Subdivision of T. 23 S., R. 13 W.

Chains.	
40.00	Set an iron post, 3 ft. long, 1 in. in diam., over a cross (X) chiseled into surface rock, and in a mound of stone, for $\frac{1}{4}$ sec. cor., with brass cap marked:
	$\begin{array}{c} \frac{1}{4} \\ \text{S 18} \quad   \quad \text{S 17} \\ \hline 1925 \end{array}$
40.50	Spur, 10 ft. above $\frac{1}{4}$ sec. cor., projects S.60°E. approximately 15.00 chs. dist.; desc. 95 ft.
58.00	Dry wash, 30 lks. wide, 1 ft. deep, in the bottom of swale, drains SE.; asc. SW. slope 105 ft. to
80.00	Set an iron post, 3 ft. long, 2 ins. in diam., 6 ins. in the ground to solid rock, and in a mound of stone, for cor. of secs. 7, 8, 17 and 18, with brass cap marked:
	$\begin{array}{c c} \text{T23S} & \text{R13W} \\ \hline \text{S7} & \text{S8} \\ \hline \text{S18} & \text{S17} \\ \hline 1925 \end{array}$
	At the base of the monument, I deposit a limestone, 6x6x2 ins., marked with a cross (X).
	Land, mountainous with outcroppings and broken ledges of limestone formation; general drainage SE.
	Soil, sandy clay loam; more shallow, gravelly and rocky, on spurs.
	Undergrowth, sagebrush, shadscale, mountain rush and yellow top; a scattering growth of buck brush.
	Fair grazing of bunch grass.
	No timber.
	S.89°42'E., on a random line bet. secs. 8 and 17.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
80.15	Intersect N. and S. line, 2 lks. S. of the cor. of secs. 8, 9, 16 and 17.
	Thence,
	N.89°43'W., on a true line bet. secs. 8 and 17.
	Over rolling bench land, through dense short undergrowth.
12.50	Dry wash, 15 lks. wide, 1 ft. deep, drains S.30°E.
24.10	Road bears NW. and S.

## Subdivision of T. 23 S., R. 13 W.

Chains.

- 39.00 Leave bench, bears N. and S., and enter low rolling mountains; asc. 65 ft. over general E. slope to
- 40.075 Set an iron post, 3 ft. long, 1 in. in diam., 6 ins. in the ground to solid rock, and in a mound of stone, for  $\frac{1}{4}$  sec. cor., with brass cap marked:

$$\begin{array}{r} S\ 8 \\ \frac{1}{4} \\ \hline S\ 17 \\ 1925 \end{array}$$

At the base of the monument, I deposit a limestone, 6x6x6 ins., marked with a cross (X).

- 52.30 Spur, 160 ft. above  $\frac{1}{4}$  sec. cor., projects S. about 10.00 chs. dist., thence southeasterly; desc. 25 ft. across the head of draw, draining S., to

- 65.00 Rocky spur, projects S. about 5.00 chs. dist.; desc. general SW. slope 65 ft. to

73.00 Draw, drains S.

- 80.15 The cor. of secs. 7, 8, 17 and 18.

Land, rolling bench, E. 32.00 chs.; low rolling mountains with outcroppings of limestone formation, W. 48.15 chs.; general drainage to the SE.

Soil, sandy clay loam; more shallow, gravelly and rocky, on the mountainous portion.

Undergrowth, sagebrush, shadscale, mountain rush and yellow top.

Fair to good grazing land.

No timber.

---

N.89°47'W., on a random line bet. secs. 7 and 18.

- 40.00 Set temp.  $\frac{1}{4}$  sec. cor.
- 77.66 Intersect the W. bdy. of the Tp., 2 lks. S. of the cor. of secs. 7, 12, 13 and 18, which is an iron post, 3 ins. in diam., extending 24 ins. above ground, firmly set in a mound of earth and stone, 6 ft. base, 1 $\frac{1}{2}$  ft. high, correctly marked, and witnessed on the W. by a mound of stone, 2 $\frac{1}{2}$  ft. base, 2 ft. high.

Thence,

S.89°46'E., on a true line bet. secs. 7 and 18.

## Subdivision of T. 23 S., R. 13 W.

Chains.	Asc. rough W. slope 620 ft., through dense short undergrowth.
22.60	Main ridge or divide, bears N. and S.; desc. E. slope 105 ft. to
37.66	Set an iron post, 3 ft. long, 1 in. in diam., over a cross (X) chiseled into surface rock, and in a mound of stone, for $\frac{1}{4}$ sec. cor., with brass cap marked:
	$\begin{array}{r} S\ 7 \\ \frac{1}{4} \\ \hline S\ 18 \\ 1925 \end{array}$
55.00	Ravine, 295 ft. below $\frac{1}{4}$ sec. cor., drains SE.; asc. abrupt SW. slope 135 ft.
65.20	Spur, projects S.30°E. approximately 7.00 chs. dist.; desc. 345 ft. to sec. cor., across draw, draining SE.
77.66	<p>The cor. of secs. 7, 8, 17 and 18.</p> <p>Land, mountainous with outcroppings and broken ledges of limestone formation; drainage W., W. 22.60 chs.; E. 55.06 chs. drain SE.</p> <p>Soil, sandy clay loam; shallow, gravelly and rocky, on spurs and on main ridge, but deeper in the bottoms of draws and ravines.</p> <p>Undergrowth, sagebrush, shadscale, mountain rush and yellow top; a scattering growth of buck brush.</p> <p>Fair growth of bunch grass.</p> <p>No timber.</p>
	N.0°03'W., bet. secs. 7 and 8.
	Asc. rough SW. slope 25 ft., through dense short undergrowth.
3.00	Spur, slopes SE. about 4.00 chs. dist.; continue ascent of 145 ft. to the top of spur, across the head of draw, draining E.
18.30	Spur, projects easterly; desc. 230 ft. along a broken general NE. slope to
40.00	Set an iron post, 3 ft. long, 1 in. in diam., over a cross (X) chiseled into surface rock, and in a mound

## Subdivision of T. 23 S., R. 13 W.

Chains.

of stone, for  $\frac{1}{4}$  sec. cor., with brass cap marked:

	$\frac{1}{4}$	
S 7		S 8
1925		

From this cor., descent becomes more gradual over NE. slope.

72.00 Road bears N.20°W. and SE.

72.20 Dry wash, 15 lks. wide, 1 ft. deep, in the bottom of swale, 170 ft. below  $\frac{1}{4}$  sec. cor., drains SE.; asc. 60 ft. along W. slope to

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., over a cross (X) chiseled into surface rock, and in a mound of stone, for cor. of secs. 5, 6, 7 and 8, with brass cap marked:

T23S	R13W
S6	S5
S7	S8
1925	

Land, rolling, and low rolling mountains with outcroppings of limestone formation; drainage to the SE.

Soil, sandy clay loam; more shallow, gravelly and rocky, on the mountainous portions.

Undergrowth, sagebrush, shadscale, mountain rush and yellow top.

Fair grazing land.

No timber.

S.89°43'E., on a random line bet. secs. 5 and 8.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

80.11 Intersect N. and S. line, 2 lks. S. of the cor. of secs. 4, 5, 8 and 9.

Thence,

N.89°44'W., on a true line bet. secs. 5 and 8.

Over rolling hills or low rolling mountains, through dense short undergrowth; desc. W. slope 15 ft.

1.00 Ravine, drains S.; asc. 15 ft.

4.70 Top of ascent on S. slope; desc. 15 ft.

## Subdivision of T. 23 S., R. 13 W.

Chains.	
9.60	Ravine, drains SE.; asc. E. slope 180 ft.
9.80	Road bears NW. and SE.
25.90	Spur, projects S. about 15.00 chs. dist., thence south-easterly; desc. W. slope 85 ft. to
40.055	Set an iron post, 3 ft. long, 1 in. in diam., 16 ins. in the ground to solid rock, and in a mound of stone, for $\frac{1}{4}$ sec. cor., with brass cap marked: $\frac{1}{4} \begin{array}{r} S 5 \\ \hline S 8 \\ 1925 \end{array}$
	At the base of the monument, I deposit a limestone, 4x4x3 ins., marked with a cross (X).
	From this cor., asc. 65 ft. across draw, draining S., to
79.00	Rough red spur, slopes S. about 4.00 chs. dist.; desc. W. slope 30 ft. to
80.11	The cor. of secs. 5, 6, 7 and 8. Land, rolling, rolling hills or low mountains, draining to the SE.; outcroppings of limestone formation. Soil, sandy clay loam; shallow, gravelly and rocky, on spurs. Undergrowth, sagebrush, shadscale, mountain rush and yellow top. Fair grazing of bunch grass. No timber.
	N.89°46'W., on a random line bet. secs. 6 and 7.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
77.68	Intersect the W. bdy. of the Tp., at the cor. of secs. 1, 6, 7 and 12, which is an iron post, 3 ins. in diam., extending 24 ins. above ground, firmly set in a mound of earth and stone, 7 ft. base, 1 ft. high, correctly marked, and witnessed on the W. by a mound of stone, 2 $\frac{1}{2}$ ft. base, 2 ft. high. Thence, S.89°46'E., on a true line bet. secs. 6 and 7. Over rolling bench land, through dense short under-

## Subdivision of T. 23 S., R. 13 W.

## Chains.

growth; asc. gradually 190 ft. to

- 37.68 Set an iron post, 3 ft. long, 1 in. in diam., over a cross (X) chiseled into surface rock, and in a mound of stone, for  $\frac{1}{4}$  sec. cor., with brass cap marked:

$$\begin{array}{r} S 6 \\ \frac{1}{4} \text{---} \\ S 7 \\ 1925 \end{array}$$

From this cor., leave bench, bears NE. and SW., and enter mountainous land; asc. abruptly 180 ft., over rough broken general W. slope.

- 57.70 Main ridge or divide, bears N. and S.20°W.; desc. E. slope 80 ft.

- 75.00 Road bears N.20°W. and SE., in dry wash, 30 lks. wide, 2 ft. deep, in the bottom of swale, draining SE.; asc. steep W. slope 35 ft. to

- 77.68 The cor. of secs. 5, 6, 7 and 8.

Land, rolling bench, W. 37.68 chs.; mountainous, broken and rough with outcroppings and ledges of limestone formation, E. 40.00 chs.; drainage SW., W..57.70 chs.; remainder of mile drains to the SE.

Soil, sandy clay loam; more shallow, gravelly and rocky, on spurs and on main ridge.

Undergrowth, sagebrush, shadscale, mountain rush and yellow top; a scattering growth of buck brush.

Fair to good grazing land.

No timber.

---

N.0°11'W., on a random line bet. secs. 5 and 6.

- 40.00 Set temp.  $\frac{1}{4}$  sec. cor.

- 79.68 Intersect the N. bdy. of the Tp., 21 lks. W. of the cor. of secs. 5, 6, 31 and 32, hereinbefore described.

Thence,

S.0°02'E., on a true line bet. secs. 5 and 6.

Desc. rough general E. slope 140 ft., through dense short undergrowth.

- 26.70 Dry wash, 12 lks. wide, 1 ft. deep, in the bottom of

Subdivision of T. 23 S., R. 13 W.

Chains. draw, drains SW.; asc. NW. slope 30 ft.

34.70 Spur, projects SW. approximately 15.00 chs. dist.; desc. SE. slope 45 ft. to

39.68 Set an iron post, 3 ft. long, 1 in. in diam., over a cross (X) chiseled into surface rock, and in a mound of stone, for  $\frac{1}{4}$  sec. cor., with brass cap marked:

$\frac{1}{4}$   
 S 6 | S 5  
 1925

47.70 Road bears NE. and SW.

49.70 Dry wash, 30 lks. wide, 1 ft. deep, in the bottom of draw, 80 ft. below  $\frac{1}{4}$  sec. cor., drains SW.; asc. 50 ft. along broken general W. slope.

66.50 Top of ascent on W. slope; desc. 140 ft. to

79.68 The cor. of secs. 5, 6, 7 and 8.

Land, rolling hills or low rolling mountains with outcroppings of limestone formation; drainage to the S., thence SE.

Soil, sandy clay loam; shallow, gravelly and rocky, on spurs and on the main ridge.

Undergrowth, sagebrush, shadscale, mountain rush and yellow top.

Fair growth of bunch grass.

No timber.

Latitudes, Departures and Closing Errors.

Line Designated.	True Bearing.	Distance.	Latitudes.		Departures.	
			N.	S.	E.	W.
West Bdy. of Tp.	North	Chs. 480.00	Chs. 480.00			
North Bdy. of Tp.	S. 89° 50' E.	477.70		1.39	477.70	
East Bdy. of Tp.	South	480.00		480.00		
South Bdy. of Tp.	N. 89° 48' W.	478.02	1.67			478.02
Convergency					.059	
Totals			481.67	481.39	478.29	478.02
Errors in lat. and dep.			481.39		478.02	
			0.28		0.27	

General Description.

The western part or a little more than one half of the land in this township may be classed as rolling mountains, rough mountains and rolling hills, while the eastern portion or more than one third of the township is level and rolling land or benches. Although, in the mountains, some of the sections contain nearly level and rolling land or benches. A main ridge or divide bears generally north and south through the western range of sections, separating the drainage of the township generally to the east and west.

Limestone, lava rock and sandstone is the formation, being exposed in the form of outcroppings and broken ledges. There are no indications of oil, coal or other mineral.

The soil is a sandy clay loam, which is deep in the bottoms of draws, ravines, swales and on the level and rolling land, but shallow, gravelly and rocky on the hills, and on the ridges and spurs of the mountainous portions; 2nd. and 3rd. rates.

A scattering growth of scrubby cedar timber is found in sections thirteen, twenty-three, twenty-four, thirty, thirty-one and thirty-two; and a sparse to a dense growth of sagebrush, shadscale, mountain rush and yellow top covers the entire township. Also, buck brush grows on parts of the mountainous sections.

There are no settlers or water in the township.

The land is more suitable for grazing stock during the winter months, for there is a fair growth of bunch grass on all of the sections, and snow serves as water. At present the land is used as a winter range for sheep.

There are no main roads, but many sheep wagon roads are found within the township.

The west edge of the dry bed of Sevier Lake lies about one to two miles east of the east boundary of this township.

**Blank**

**Page**



CERTIFICATE OF UNITED STATES SURVEYOR.

I, Willis W. Bandy, U. S. Surveyor, hereby certify upon honor that, in pursuance of special instructions received from the U. S. Surveyor General for Utah bearing date of the 19th day of March, 1921, I have well, faithfully, and in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, surveyed all those parts or portions of an Independent Resurvey of the East Boundary or Sevier Lake Guide Meridian, Independent Resurvey of the North Boundary, and Survey of the Subdivision of Township No. 23 South, Range No. 13 West of the Salt Lake Base and Meridian, in the State of Utah, which are represented and date diagram on page 1 of same on the dates shown on said the foregoing field notes as having been executed by me, and under my direction, and that all the corners of said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the U. S. Surveyor General for Utah and in the specific manner described in the field notes, and that the foregoing are the original field notes of such survey. Certified to at Cedarick, Mo. May 24, 1927

Willis W. Bandy U. S. Surveyor

APPROVAL.

Office of the United States Supervisor of Surveys

Denver, Colorado, DEC 10 1928

The foregoing field notes of the independent resurvey of the east boundary or Sevier Lake Guide Meridian and of the north boundary; and of the subdivision of Township No. 23 South, Range No. 13 West of Salt Lake Base and Meridian, Utah,

executed by Willis W. Bandy, U. S. Surveyor

under special instructions dated March 19, 1921, having critically examined, and the necessary corrections and explanations made, the said field notes, and the same as they describe, are hereby approved.

U. S. Supervisor of Surveys

I certify that the foregoing transcript of the field notes of the above described surveys in has been correctly copied from the original notes on file in this office

**Blank**

**Page**

**Blank**

**Page**

by  
Mayor, G.L.O.

Original

347

'C'

4-679

RECEIVED

MAY 13 1927  
District Cadastral Engineer,  
Salt Lake City, Utah

BOOK A-481

# FIELD NOTES

OF THE SURVEY OF THE

INDEPENDENT RESURVEY OF THE NORTH AND EAST BOUNDARIES AND SURVEY OF  
THE SUBDIVISION OF, T. 24 S., R. 13 W.

Of the Salt Lake Base and Meridian,

In the State of Utah

EXECUTED BY

Ralph Gentry

Cadastral Engineer

in the capacity of U.S. Surveyor, under instructions dated March 19, 1921,

issued by the United States Surveyor General to govern surveys included in

Group No. 101, which were approved by the Commissioner of the General Land

Office, March 25, 1921. Supplemental Assignment instructions dated May 5, 1925.

Survey commenced May 18, 1925

Survey completed June 2, 1925.

BOOK A-481

# INDEX DIAGRAM.

Township 24 South ..... Range 13 West .....

15	14	13	12	11	10	
6 61	5 49	4 41	3 32	2 24	1 23	9
7 59	8 47	9 39	10 31	11 22	12 22	8
18 57	17 46	16 38	15 29	14 21	13 20	7
19 54	20 44	21 36	22 28	23 19	24 19	6
30 52	29 43	28 35	27 26	26 18	25 17	5
31 50	32 41	33 33	34 25	35 16	36 16	4

T. 24 S., R. 13 W.

DATE DIAGRAM

6-1-25	6-1-25	5-20-25	5-20-25	5-20-25	5-20-25
5-20-25	5-20-25				
6	5	4	3	2	1
6-1-25	6-1-25	5-29-25	5-29-25	5-28-25	5-28-25
7	8	9	10	11	12
5-29-25	5-29-25	5-27-25	5-26-25	5-28-25	5-23-25
18	17	16	15	14	13
5-27-25	5-27-25	5-26-25	5-25-25	5-23-25	5-22-25
19	20	21	22	23	24
5-26-25	5-26-25	5-25-25	5-23-25	5-22-25	5-21-25
30	29	28	27	26	25
5-25-25	5-25-25	5-23-25	5-22-25	5-21-25	5-21-25
31	32	33	34	35	36
5-23-25	5-23-25	5-22-25	5-21-25	5-21-25	5-19-25

All lines surveyed by Ralph Gentry, U.S. Cadastral Engineer.

DESCRIPTION AND TESTS OF INSTRUMENTS

Survey commenced May 18, 1925, and executed with Buff and Buff solar transit No. 16725. The instrument is equipped with Smith solar attachment and full vertical circle. The horizontal limb has two verniers placed opposite to each other and reading to single minutes of arc, which is also the least count of the verniers of the latitude and declination arcs and vertical circle.

The instrument was approved for use on this survey by

T. 24 S., R. 13 W.

the District Cadastral Engineer for district No. 6, conditional upon satisfactory field tests, in supplemental assignment instructions dated May 5, 1925.

I examine the adjustments of the instrument and correct all errors. I then test the solar apparatus by comparing its indications resulting from solar observations made during a.m. and p.m. hours, with a meridian determined by observations made on Polaris as follows:

May 17, 1925: At my camp located in sec. 22, T. 24 S., R. 13 W., Salt Lake Base and Meridian, Utah, in approximate latitude  $38^{\circ}43'$  N., longitude  $113^{\circ}16'$  W.; I make an hour angle observation of Polaris west of the meridian, making four observations, two each with the telescope in direct and reversed positions, reading the horizontal deflection angle from flag set about 10-chains northerly from my station, in direction NW. to Polaris.

Mean watch time of observation = 7h 26m p.m.

Watch fast of local mean time = 0h 33m

Watch compared with Western Union clock at Milford, Utah, May 16, 1925.

Mean horizontal angle from flag to Polaris =  $1^{\circ}02'$  W

Azimuth of Polaris =  $0^{\circ}59'$  W.

True bearing of flag = N.  $0^{\circ}03'$  E.

May 18, 1925: At 8h 00m a.m. apparent time, with the instrument in the meridian, I set off  $38^{\circ}43'$  N. on the latitude arc;  $19^{\circ}32'$  N., on the declination arc; and determine a meridian with the solar which I find to agree with the true meridian.

At apparent noon, with the instrument in the meridian, I make an altitude observation of the sun for latitude making four observations, two each with the telescope in direct and reversed positions on both the lower and upper limbs of the sun.

Mean observed altitude =  $70^{\circ}51'$ .

Reduced latitude =  $38^{\circ}43'$  N.

## T. 24 S., R. 13 W.

At apparent noon, with the instrument in the meridian and the latitude arc unchanged, I find the reading of the declination arc to be  $19^{\circ}34'$  N., which agrees with the computed declination of the sun.

At 4h 00m p.m. apparent time, with the instrument in the meridian and the latitude arc unchanged, I set off  $19^{\circ}37'$  N., on the declination arc, and determine a meridian with the solar which I find to agree with the true meridian.

As all the solar observations made during the usual hours of solar work, come within 1' of the true meridian, I conclude that the instrument is in satisfactory adjustment.

The instrument was kept in good adjustment throughout the progress of this survey, frequent tests being made on the meridian determined by observations made on Polaris heretofore described. At the completion of the survey of this township, the instrument was again tested on said meridian and found still to be in satisfactory adjustment.

---

MEASUREMENTS.

Unless otherwise specified, all measurements are made with a Lallie steel tape 5 chains in length, compared with a Lufkin standard steel tape 1 chain in length and found correct. The measurements are made on the slope, the vertical angle determined, and the slope measurements properly reduced to true horizontal distances.

---

METHOD AND ORDER OF PROCEDURE

The south boundary of this township was surveyed by Howard W. Miller, U.S. Surveyor, in year 1924, under group 93, Utah. The course of this boundary is N.  $89^{\circ}47'$  W., and the distance 477.73 chs., the fractional

## METHOD AND ORDER OF PROCEDURE.

distance being placed in the western half mile. The west boundary of the township was surveyed by Collier and Gentry in year 1909. The course of this boundary is north, and the distance 480 chains. The north and east boundaries have been reported as surveyed, but no indication of the survey was found and an independent resurvey of both these boundaries was made. The east boundary is the Sevier Lake Guide Meridian and is run north from the cor. T<sub>s</sub>. 24 and 25 S., R<sub>s</sub>. 12 and 13 W., a distance of 480 chains to a point where the cor. T<sub>s</sub>. 23 and 24 S., R<sub>s</sub>. 12 and 13 W. was set.

The north boundary was run random and true from the cor. T<sub>s</sub>. 23 and 24 S., R<sub>s</sub>. 12 and 13 W. to the cor. T<sub>s</sub>. 23 and 24 S., R<sub>s</sub>. 13 and 14 W. The course of this boundary is N. 89°48' W., the distance 478.02 chs. and the fractional distance placed in the western half mile.

The township was subdivided from the east to the west and south to the north. The fractional distances were placed against the north and west boundaries of the township.

INDEPENDENT RESURVEY SEVIER LAKE GUIDE MERIDIAN THROUGH T. 24 S., BETWEEN R<sub>s</sub>. 12 and 13 W., SUPERSEDING SURVEY MADE BY ANDREW J. STEWART IN YEAR 1882.

From the cor. T<sub>s</sub>. 24 and 25 S., R<sub>s</sub>. 12 and 13 W., which is an iron post, 3 ins. diam., extending 10 ins. above ground, with brass cap, properly marked, witnessed by a mound of stone, 3 ft. base, 2 ft. high, S. of cor. North, bet. secs. 31 and 36, along the E. bdy. of the township.

Over rolling bench land through scattered undergrowth.


- 16.30 Wash, 50 lks. wide, 10 ft. deep, drains NW.
- 36.00 Top of descent from bench, bears NE. and SW,
- 38.70 Base of descent from bench, 40 ft. below top, bears NE. and SW.; thence over rolling land.

INDEPENDENT RESURVEY SEVIER LAKE GUIDE MERIDIAN THROUGH  
T. 24 S., BET. Rs. 12 and 13 W.

Chains

40.60 On rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.




Raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, W. of cor.

58.30 Road, bears NE. and SW.

80.00 On rolling land.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. secs. 25, 30, 31 and 36, with brass cap marked.



Raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, W. of cor.

Land, rolling, with a general northwesterly exposure and drainage.

Soil, deep clay loam; 3rd rate.

Undergrowth, scattered shadscale, mountain rush and yellow top.

No timber.


Fair grazing.

North, bet. secs. 25 and 30.

Over rolling land through scattered undergrowth.

40.00 On rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked



INDEPENDENT RESURVEY SEVIER LAKE GUIDE MERIDIAN THROUGH  
T. 24 S., BET. Rs. 12 and 13 W.

Chains

Deposit a quartzite, 6 x 4 x 4 ins., at base of post,  
marked with a cross (X),

No other suitable accessories available and soil too  
loose for pits.

47.10 Road, bears E. and W.

80.00 On rolling land.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in  
the ground, for cor. secs. 19, 24, 25 and 30, with brass  
cap marked:

T24S	
R13W	R12W
S24	S19
-----	
S25	S30

1925

Deposit a quartzite, 8 x 6 x 3 ins., at base of post,  
marked with a cross (X).

No other suitable accessories available and soil too  
loose for pits.

Land, rolling.

Soil, deep sand and clay loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain  
rush and yellow top.

No timber.

Fair grazing.

North, bet. secs. 19 and 24.

Over rolling bench land through scattered undergrowth.

40.00 On rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the  
ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

$\frac{1}{4}$	
S24	S19
-----	
1925	

Deposit a quartzite, 4 x 3 x 3 ins., at base of post,  
marked with a cross (X).

No other suitable accessories available and soil too  
loose for pits.

INDEPENDENT RESURVEY SEVIER LAKE GUIDE MERIDIAN THROUGH T. 24 S., BET. Rs. 12 and 13 W.

Chains

72.30 Road, bears SE. and NW.

80.00 On rolling land.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. secs. 13, 18, 19 and 24, with brass cap marked.

T24S	
R13W	R12W
S13	S18
-----	
S24	S19

1925

Deposit a quartzite, 4 x 4 x 2 ins., at base of post, marked with a cross (X).

No other suitable accessories available and soil too loose for pits.

Land, rolling benches.

Soil, deep loose sand and clay loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

North, bet. secs. 13 and 18.

Over rolling bench land through scattered undergrowth.

40.00 On rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/4 sec. cor., with brass cap marked.

S13	S18
-----	
1925	

Deposit a quartzite, 6 x 4 x 4 ins., at base of post, marked with a cross (X).

No other suitable accessories available and soil too loose for pits.

42.70 Road, bears NW. and SE.

62.40 Draw, 20 ft. deep, drains N. 30° E.

80.00 On rolling land.

INDEPENDENT RESURVEY SEVIER LAKE GUIDE MERIDIAN THROUGH  
T. 24 S., BET. Rs. 12 and 13..W.

## Chains

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. secs. 7, 12, 13 and 18, with brass cap marked.

T24S	
R13W	R12W
S12	S7
-----	
S13	S18
1925	

Deposit a quartzite, 4 x 4 x 3 ins., at base of post, marked with a cross (X).

Land, rolling.

Soil, shallow sand and clay loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

North, bet. secs. 7 and 12.

Over rolling land through scattered undergrowth.

40.00 On rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

$\frac{1}{4}$	
S12	S7
-----	
1925	

Deposit a lava stone, 4 x 3 x 3 ins., at base of post, marked with a cross (X).

No other suitable accessories available and soil too loose for pits.

80.00 On rolling land.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. secs. 1, 6, 7 and 12, with brass cap marked.

T24S	
R13W	R12W
S1	S6
-----	
S12	S7
1925	

INDEPENDENT RESURVEY SEVIER LAKE GUIDE MERIDIAN THROUGH  
HOUCHENS T. 24 S., R. 12 and 13 W.

chains.

Deposit a limestone, 4 x 3 x 2 ins. at base of post  
marked with a cross (x)

Also, dig pits, 18 x 18 x 12 ins. in each sec., 3 ft.  
dist. from post.

Land, rolling.

Soil, sand and clay loam, 3rd. rate.

Undergrowth, scattered sagebrush, shadscale, mountain  
rush and yellow top.

No timber.

Fair grazing.


North, bet. Secs. 1 and 6.

Over rolling bench land through scattered undergrowth.

10.50 Road, bears N. 30° E. and S. 30° W.

40.00 On rolling bench land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in  
the ground for 4 sec. cor., with brass cap marked




Deposit a quartzite, 5 x 3 x 2 ins. at base of post.  
marked with a cross (x)

No other suitable accessories available and soil too  
loose for pits.

60.00 Base of rolling bench, bears E. and W., thence across  
flat.

80.00 On S. slope of bench land

Set an iron post, 3 ft. long, 3 ins. diam., 27 ins. in  
the ground for cor. Ts. 23 and 24, Rs. 12 and 13 W.  
with brass cap marked.



-10-

INDEPENDENT RESURVEY SEVIER LAKE GUIDE MERIDIAN THROUGH  
T. 24 S., BET. Rs. 12 and 13 W.

chains

Dig pits, 18 x 18 x 12 ins., one each on N., S., E., and W. of post, 3 ft. dist.

Land, flat and rolling.

Soil, deep clay and sandy loam, 3rd rate.

Undergrowth, scattered sagebrush and shadscale.

No timber.

Fair grazing.

INDEPENDENT RESURVEY NORTH BOUNDARY, T. 24 S., R. 13 W. superseding the survey made by Andrew J. Stewart in 188

From the cor. Ts. 23 and 24 S. Rs. 12 and 13 W.,

West, on random line along the N. bdy. of the township, setting temp.  $\frac{1}{2}$  sec. and sec. cors. at intervals of 40.00 chs. and 80.00 chs., and at

478.02 Intersect the W. bdy. of the township, 167 lks. S. of the established point for the cor. Ts. 23 and 24 S., Rs. 13 and 14 W. Cor. point falls in wash which drains S. 20° W. Cor. is an iron post, 3 ft. long, 3 ins. diam., with brass cap properly marked, found in bottom of wash alongside a dim mound of stone. From this point, a cedar, 14 ins. diam., bears S. 18° 04' E., 5.40 chs. dist., marked T. 24 S. R. 13 W. S6 BT, which is also the course and distance given to the bearing tree in the original records. As it is impracticable to set the cor. permanently at its true position, therefore at a point, 20 lks. S. of the true cor. point, reset the original cor., 27 ins. in the ground and mark WC on the N. half of the brass cap, for witness cor. to the cor. Ts. 23 and 24 S. Rs. 13 and 14 W.

From which,

The original bearing tree to cor. and upon which I add marks WC, bears S. 18° 45' E., 5.20 chs. dist.

No other bearing trees available.

The course of this bdy. therefore is N. 89° 48' W., and the distance is 478.02 chs.

Thence,

From the cor. T<sub>25</sub> and 24 S., R<sub>2</sub> 12 and 13 W.,  
 N. 89°48' W., on true line, bet. secs. 1 and 36, along  
 the N. bdy. of the township.

Over rolling bench land through scattered undergrowth.

40.00 On rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the  
 ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

$\frac{836}{81}$   
 1926

Raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$  ft. high, N. of  
 cor.

46.00 Road, bears N. and S.

80.00 On rolling land.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in  
 the ground, for cor. secs. 1, 2, 35 and 36, with brass  
 cap marked.

T <sub>25</sub> S	R <sub>13</sub> W
S <sub>35</sub>	S <sub>36</sub>
32	31
1926	

Raise a mound of stone, 2 ft. base, 1 ft. high, N. of  
 cor.

Land, rolling benches and hills.

Soil, deep sand and clay loam; 2nd rate.

Undergrowth, scattered sagebrush, shadscale, mountain  
 rush and yellow top.

No timber.

Fair grazing.

N. 89°48' W., bet. secs. 2 and 35.

Over rolling bench land and hills through scattered  
 undergrowth.

84.50 Old road and trail, bears N. and S.

89.00 at base of gradual ascent, bears N. and S.

INDEPENDENT RESURVEY NORTH BOUNDARY T. 24 S., R. 15 E.

Chains

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in ground, for 1/4 sec. cor., with brass cap marked.

S35  
1/4  
S2

1925

Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor.

- 57.50 Base of spur, bears N. and S.
- 63.60 Top of spur, 230 ft. above the 1/4 sec. cor., projects S. 3.00 chs. dist.; descend gradual W. slope.
- 70.80 Draw, 150 ft. below spur, drains S. 20° E.; draw heads about 15.00 chs. dist. to the N
- 80.00 On gradual E. slope of spur, 20 ft. above draw.

Set an iron post, 3 ft. long, 2 ins. diam., 6 ins. in the ground to solid rock and 30 ins. in a mound of stone for cor. secs. 2, 3, 34 and 35, with brass cap marked

T23S	R13W
S34	S35
S3	S2
T24S	

1925

Deposit a limestone, 8 x 7 x 6 ins. at base of post, marked with a cross (X).

Land, rolling, with a general southerly exposure and drainage.

Soil, shallow clay and sandy loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

N. 89°48' W., bet. secs. 3 and 34.

Ascend gradual E. slope of rolling land through scattered undergrowth.

- 3.20 Rocky spur, 60 ft. above cor.; projects SW., 20.00 chs. dist.

INDEPENDENT RESURVEY NORTH BOUNDARY T. 24 S., R. 13 W.

Wash, 80 lks. wide, 3 ft. deep, drains SW.

On rolling SW. slope.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

S34  
 $\frac{1}{4}$   
S3  
1925

Raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, N. of cor.

51.70 Road, bears N. 20° W. and S. 35° E.

50.00 On gradual E. slope at base of low spur, bears N. and S.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. secs. 3, 4, 33 and 34, with brass cap marked.

T23S | R13W  
S33 | S34  
S4 | S3  
T24E  
1925

Raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, W. of cor.

Land, rolling with a general southerly exposure and drainage.

Soil, deep sand and clay loam; 3rd rate.

Undergrowth, sagebrush, shedscale, mountain rush and yellow top.

No timber.

Fair grazing.

N. 89°48' W.. bet. secs. 4 and 33.

Over broken and rolling benches through scattered undergrowth.

3.00 Low spur, projects S., 150 lks. dist.

5.00 Base of gradual descent from top of spur, 20 ft. below top, bears N. and S.

25.00 Base of gradual ascent over N. slope of knoll, bears N. and S.

## INDEPENDENT RESURVEY NORTH BOUNDARY T.24 S., R. 13 W.

## Chains

38.40 Top of ascent on N. slope of knoll, 40 ft. high, bears  
N. and S.

40.00 On gradual NW. slope of knoll.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the  
ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

S33
$\frac{1}{4}$
S4

1925

Raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, N. of  
cor.

45.00 Base of descent from knoll, 40 ft. below top, bears  
NW. and SW.

80.00 On rolling land.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in  
the ground, for cor. secs. 4, 5, 32 and 33, with brass  
cap marked.

T23S	R13W
S32	S33
S5	S4
T24S	

1925

Raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, W. of  
cor.

Land, rolling and broken.

Soil, shallow rocky clay and sandy loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain  
rush and yellow top.

No timber.

Fair grazing.

N.  $89^{\circ}48'$  W., bet. secs. 5 and 32.

Over rolling and broken hills through scattered under-  
growth.

40.00 On rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the  
ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked

## INDEPENDENT RESURVEY NORTH BOUNDARY T. 24 S., R. 13 W.

Chains

S32
$\frac{1}{4}$
S5

1925

Raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, N. of cor.

- 46.00 Old road, bears NE. and SW. in draw draining SE.
- 60.00 Base of rocky spur, bears N.  $30^{\circ}$  E. and S.; ascend abrupt SE. slope of spur.
- 80.00 On abrupt SE. slope of spur, 480 ft. above the  $\frac{1}{4}$  sec. cor., on limestone surfacerock, mark a cross (X), over which: Set an iron post, 3 ft. long, 2 ins. diam., 36 ins. in a mound of stone, for cor. secs. 5, 6, 31 and 32, with brass cap marked.

T23S	R13W
S31	S32
S6	S5
T24S	

1925

Land, rolling and broken.

Soil, shallow rocky sand and clay loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

N.  $89^{\circ}48'$  W., bet. secs. 6 and 31.

Ascend abruptly over broken SE. slope of rocky spur through scattered undergrowth.

- 3.30 Top of rocky spur, 60 ft. above cor., projects S.; descend abrupt W. slope.
- 18.00 Ravine, 220 ft. below spur, drains S.  $30^{\circ}$  E.; thence ascend gradually over broken N. slope of rocky spur.
- 40.00 On top of rocky spur, 220 ft. above ravine, projects S.  $20^{\circ}$  E.
- Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground to solid rock and 24 ins. in a mound of stone, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

## INDEPENDENT RESURVEY NORTH BOUNDARY T. 24 S., R. 13 W.

Chains

$$\frac{S31}{\frac{1}{4} S6}$$

1925

Deposit a limestone, 6 x 5 x 3 ins., at base of post, marked with a cross (X).

52.00 Ravine, 70 ft. below the  $\frac{1}{4}$  sec. cor., drains S. 30° E.; ravine heads 7.00 chs. N.; ascend abrupt NE. slope.

61.90 Rocky spur, 200 ft. above ravine, projects S. 20° E.; descend gradual SW. slope.

78.00 The true point for the cor. Ts. 23 and 24 S., Rs. 13 and 14 W., which is N., 20 lks. dist. from the witness cor. to said townships, 290 ft. below spur and heretofore described.

Land, broken and rolling with a general southeasterly exposure and drainage.

Soil, shallow rocky clay and sandy loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

Timber, a few scattered scrub juniper.

Fair grazing.

## SUBDIVISION T. 24 S., R. 13 W.

From the cor. secs. 1, 2, 35 and 36, on the S. bdy. of the township, which is an iron post, 2 ins. diam., with brass cap, set, marked and witnessed as described in the finished notes of the survey T. 25 S., R. 13 W. 0'01" W., bet. secs. 35 and 36.

Over rolling bench land through scattered undergrowth.

0.0 Road, bears NE. and SW.

00.00 00 rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

$$\frac{1}{4}$$

$$S35 \quad | \quad S36$$

1925

SUBDIVISION, T. 24 S., R. 13 W.


Chains

Deposit a quartzite, 10 x 6 x 2 ins., at base of post, marked with a cross (X).

No other suitable accessories available and soil too loose for pits.

80.00 On rolling land.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. secs. 25, 26, 35 and 36, with brass cap marked.



Deposit a quartzite, 6 x 4 x 2 ins., at base of post, marked with a cross (X).

No other suitable accessories available and soil too loose for pits.

Land, rolling.

Soil, deep clay and sandy loam; 3rd rate.

Undergrowth, scattered shadscale and yellow top.

No timber.

Fair grazing.

S. 89°47' E., on random line bet. secs. 25 and 36.

40.00 Set temp. sec. cor.

80.00 Intersect the E. bdy. of the township, 16 lks. S. of the cor. secs. 25, 30, 31 and 36.


Thence,

N. 89°54' W., on true line bet. secs. 25 and 36.

Over rolling sand hills through scattered undergrowth.

40.00 On rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.



Deposit a quartzite, 10 x 4 x 2 ins., at base of post, marked with a cross (X).

## SUBDIVISION T. 24 S., R. 13 W.

## Chains

No other suitable accessories available and soil too loose for pits.

80.00 The cor. secs. 25, 26, 35 and 36.

Land, rolling sand hills.

Soil, deep sand and clay loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

N. 0°01' E., bet. secs. 25 and 26.

Over rolling top of bench through scattered undergrowth.

30.00 Base of bench, bears E. and W.

40.00 On rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for sec. cor., with brass cap marked.

$$\frac{1}{4}$$

S26	S25
1925	

Deposit a quartzite, 6 x 6 x 2 ins., at base of post, marked with a cross (X).

No other suitable accessories available and soil too loose for pits.

69.20 Road, bears E. and W.

80.00 On rolling land.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. secs. 23, 24, 25 and 26, with brass cap marked.

T24S	R13W
S23	S24
S26	S25
1925	

Deposit a quartzite, 4 x 3 x 2 ins., at base of post, marked with a cross (X).

No other suitable accessories available and soil too loose for pits.

SUBDIVISION T. 24 S., R. 13 W.

Chains

Land, rolling sand hills and flats.

Soil, deep clay and sandy loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

S. 89°54' E., on random line bet. secs. 24 and 25.

40.00 Set temp. sec. cor.

79.96 Intersect the E. bdy. of the township, 3 lks. W. of the cor. secs. 19, 24, 25 and 30.

Thence,

N. 89°55' W., on true line bet. secs. 24 and 25.

Over rolling land through scattered undergrowth.

39.98 On rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for sec. cor., with brass cap marked.

824

825

1925

Deposit a quartite, 4 x 4 x 2 1/2 in., at base of post, marked with a cross (X).

No other suitable accessories available and soil too loose for pits.

79.96 The cor. secs. 23, 24, 25 and 26.

Land, rolling benches and flats.

Soil, deep sand and clay loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

N. 0°01' W., bet. secs. 23 and 24.

Over level flat through scattered undergrowth.

40.00 On level flat.

## SUBDIVISION T. 24 S., R. 13 W.

Chains

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

$$\begin{array}{c} \frac{1}{4} \\ \hline \text{S23} \quad | \quad \text{S24} \\ \hline 1925 \end{array}$$

Dig pits, 18 x 18 x 12 ins., on line N. and S. from post 3 ft. dist.

80.00 On level flat.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. secs. 13, 14, 23 and 24, with brass cap marked.

$$\begin{array}{c} \text{T24S} \quad | \quad \text{R13W} \\ \hline \text{S14} \quad | \quad \text{S13} \\ \hline \text{S23} \quad | \quad \text{S24} \\ \hline 1925 \end{array}$$

Dig pits, 18 x 18 x 12 ins., in each sec., 3 ft. dist. from post.

Land, level flat.

Soil, deep clay and sandy loam; 3rd rate.

Undergrowth, scattered shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

S. 89°55' E., on random line bet. secs. 13 and 24.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

79.94 Intersect the E. bdy. of the township, 14 lks. S. of the cor. secs. 13, 18, 19 and 24.

Thence,

S. 89°59' E., on true line bet. secs. 13 and 24.

Over level land through scattered undergrowth.

9.50 Road, bears NW. and SE.

39.97 On level land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

SUBDIVISION T. 24 S., R. 13 W.

Chains

S13  
 $\frac{1}{4}$  ———  
 S24

1925

Dig pits, 18 x 18 x 12 ins., on line, E. and W. of post,  
 3 ft. dist.

79.94 The cor. secs. 13, 14, 23 and 24.

Land, level.

Soil, deep clay and sandy loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain  
 rush and yellow top.

No timber.

Fair grazing.

N. 0°01' W., bet. secs. 13 and 14.

Over level land through scattered undergrowth.

40.00 On level land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the  
 ground, for sec. cor., with brass cap marked

S14 | S13  
 1925

Raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

70.30 Road, bears NW. and SE.

80.00 On level land.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the  
 ground, for cor. secs. 11, 12, 13 and 14, with brass  
 cap marked.

T24S | R13W  
 S11 | S12  
 ———  
 S14 | S13  
 1925

Dig pits, 18 x 18 x 12 ins., in each sec., 3 ft. dist.  
 from post.

Land, level.

Soil, deep clay and sandy loam.

Undergrowth, scattered sagebrush, shadscale, mountain  
 rush and yellow top.

## SUBDIVISION T. 24 S., R. 13 W.

## Chains

No timber.

Fair grazing.

N. 89°59' E., on random line bet. secs. 12 and 13.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

79.92 Intersect the E. bdy. of the township, 5 lks. N. of the  
cor. secs. 7, 12, 13 and 18.

Thence,

N. 89°59' W., on true line bet. secs. 12 and 13.

Over level land through scattered undergrowth.

20.00 Road, bears N. and S. 20° E.

39.96 On level land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in  
the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

$$\begin{array}{r} S12 \\ \frac{1}{4} \\ \hline S13 \end{array}$$

1925

Raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, N. of c

79.92 The cor. secs. 11, 12, 13 and 14.

Land, level.

Soil, deep clay and sandy loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain  
rush and yellow top.

No timber.

Fair grazing.

N. 0°01' W., bet. secs. 11 and 12.

Over rolling land through scattered undergrowth.

40.00 On rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the  
ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

$$\begin{array}{r} \frac{1}{4} \\ S11 \mid S12 \\ \hline 1925 \end{array}$$

Raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, W. of c

SUBDIVISION T. 24 S., R. 13 W.

25.00

On rolling land. .  
Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. secs. 1, 2, 11 and 12, with brass cap marked.

T24S	R13W
S2	S1
S11	S12

1925

Deposit a limestone, 6 x 6 x 4 ins., at base of post, marked with a cross (X).

No other suitable accessories available and soil too loose for pits.

Land, rolling.

Soil, deep clay and sandy loam; red rats.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow loc.

No timber.

Fair grazing.

. 89°57' E., on random line bet. sec. 1 and 12.

40.00

Set temp. sec. cor.

80.00

Intersect the E. bdy. of the township, 9 lns. N. of the cor. secs. 1, 7 and 12.

Thence,

S. 89°57' W., on true line bet. secs. 1 and 12.

Over rolling land through scattered undergrowth.

2.50

Road, bears S. 20° E. and ...

40.00

On rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for sec. cor., with brass cap marked.

1	S1
4	S12

1925

Deposit a limestone, 6 x 4 x 2 ins., at base of post, marked with a cross (X).

No other suitable accessories available and soil too loose for pits.

## SUBDIVISION T. 24 S., R. 13 W.

## Chains

- 80.00 The cor. secs. 1, 2, 11 and 12.  
 Land, rolling.  
 Soil, deep clay and sandy loam; 3rd rate.  
 Undergrowth, scattered sagebrush, shadscale, mountain  
 rush and yellow top.  
 No timber.  
 Fair grazing.
- 
- N. 0°01' W., on random line bet. secs. 1 and 2.
- 40.00 Set temp.  $\frac{1}{2}$  sec. cor.
- 80.20 Intersect the N. bdy. of the township, 5 lks. W. of the  
 cor. secs. 1, 2, 35 and 36.  
 Thence,  
 S. 0°01' W., on true line bet. secs. 1 and 2.  
 Over level land through scattered undergrowth.
- 40.20 On rolling land, at base of bench, bears NE. and SW.  
 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the  
 ground, for  $\frac{1}{2}$  sec. cor., with brass cap marked.
- $$\frac{1}{2}$$

S2	S1
1925	
- Deposit a limestone, 4 x 4 x 2 ins., at base of post,  
 marked with a cross (X).
- No other suitable accessories available and soil too  
 loose for pits.
- 80.20 The cor. secs. 1, 2, 11 and 12.  
 Land, rolling and level.  
 Soil, deep clay and sandy loam; 3rd rate.  
 Undergrowth, scattered sagebrush, shadscale, mountain  
 rush and yellow top.  
 No timber.  
 Fair grazing.
-

## SUBDIVISION T. 24 S., R. 13 W.

Chains

From the cor. secs. 2, 3, 34 and 35, on the S. bdy. of the township, which is an iron post, 2 ins. diam., with brass cap, set, marked and witnessed as described in the finished notes of the survey T. 25 S., R. 13 W. N. 0°01' W., bet. secs. 34 and 35.

Over level land through scattered undergrowth.

40.00 On level land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for sec. cor., with brass cap marked.

34	35
1925	

Deposit a quartzite, 6 x 4 x 2 ins., at base of post, marked with a cross (X).

No other suitable accessories available and soil too loose for pits.

80.00 On level land.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. secs. 26, 27, 34 and 35, with brass cap marked.

T24S	R13W
S27	S26
34	35
1925	

Deposit a quartzite, 4 x 4 x 2 ins., at base of post, marked with a cross (X).

No other suitable accessories available and soil too loose for pits.

Land, level and rolling.

Soil, deep sand and clay loam; 3rd rate.

Undergrowth, scattered sagebrush, shedscale, mountain rush and yellow top.

No timber.

Fair grazing.

## SUBDIVISION T. 24 S., R. 13 W.

Chains

S. 89°47' E., on random line bet. secs. 26 and 35.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.80.08 Intersect the N. and S. line, 3 lks. N. of the cor. sec.  
25, 26, 35 and 36.

Thence,

N. 89°46' W., on true line bet. secs. 26 and 35.

Over rolling sand hills through scattered undergrowth.

40.04 On rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the  
ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked:
$$\begin{array}{r} \text{S26} \\ \frac{1}{4} \\ \hline \text{S35} \\ 1925 \end{array}$$
Raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, N. of cor.

53.00 Enter rolling top of bench, bears NW. and SE.

58.00 Leave bench, bears N. 30° W. and S. 30° E.

80.08 The cor. secs. 26, 27, 34 and 35.

Land, rolling.

Soil, deep sand and clay loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain  
rush and yellow top.

No timber.

Fair grazing.

N. 0°01' W., bet. secs. 26 and 27.

Over rolling hills through scattered undergrowth.

40.00 On gradual NE. slope of bench.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the  
ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.
$$\begin{array}{r} \frac{1}{4} \\ \text{S27} \mid \text{S26} \\ 1925 \end{array}$$
Deposit a limestone, 6 x 6 x 4 ins., at base of post,  
marked with a cross (X).No other suitable accessories available and soil too  
loose for pits.

SUBDIVISION T. 24 S., R. 13 W.

chains

47.60

Base of bench land, bears E. and W., thence over flat.


78.90

Road, bears N. 80° W. and S. 80° E

80.00

On level land.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. secs. 22, 23, 26 and 27, with brass cap marked



Deposit a quartzite, 8x3x3 ins., at base of post, marked with a cross (X)

No other suitable accessories available and soil too loose for pits.

Land, rolling and level.

Soil, deep sand and clay loam; 3rd rate.

Undergrowth, scattered sagebrush, chamisa, mountain rush and yellow top.

No timber.

Fair grazing.

S. 89° 46' E., on random line bet. secs. 23 and 26.

40.00

Set temp. 1/4 sec. cor.

80.10

Intersect the N. and S. line, 14 lks. S. of the cor. secs. 23, 24, 25 and 26,

Thence


N. 89° 52' W. on true line bet. secs. 23 and 26.

Over level land through scattered undergrowth.

40.05

On level land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/4 sec. cor., with brass cap marked



Dig pits, 18x18x12 ins. E. and W. of post, 3 ft. dist.

80.10

The cor. secs. 22, 23, 26 and 27.



SUBDIVISION T. 24 S., R. 13 W.

Chains

S. 89°52' E., on random line bet. secs. 14 and 23.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

80.08 Intersect the N. and S. line, 3 lks. N. of the cor. secs. 13, 14, 23 and 24.

Thence,

N. 89°51' W., on true line bet. secs. 14 and 23.

Over level land through scattered undergrowth.

40.04 On level land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

$$\begin{array}{r} S14 \\ \frac{1}{4} \\ \hline S23 \\ 1925 \end{array}$$

Dig pits, 18 x 18 x 12 ins., E. and W. of post, 3 ft. dist.

80.08 The cor. secs. 14, 15, 22 and 23.

Land, level.

Soil, deep clay and sandy loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

N. 0°01' W., bet. secs. 14 and 15.

Over rolling land through scattered undergrowth.

30.00 Enter bench land, bears NE. and SW.

40.00 On rolling bench land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

$$\begin{array}{r} \frac{1}{4} \\ S15 \quad | \quad S14 \\ 1925 \end{array}$$

Raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, W. of cor.

60.00 Leave bench land, 60 ft. high, bears NE. and SW.; thence over level land.

## SUBDIVISION T. 24 S., R. 13 W.

Chains

80.00 On level land.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. secs. 10, 11, 14 and 15, with brass cap marked.

T24S	R13W
S10	S11
S15	S14

1925

Dig pits, 18 x 18 x 12 ins., in each sec., 3 ft. dist. from post. Also, deposit a limestone, 4 x 3 x 2 ins., at base of post, marked with a cross (X).

Land, level and rolling.

Soil, deep clay and sandy loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

S. 89°51' E., on random line bet. secs. 11 and 14.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

80.12 Intersect the N. and S. line, 7 lks. N. of the cor. secs. 11, 12, 13 and 14.

Thence,

N. 89°48' W., on true line bet. secs. 11 and 14.

Over rolling land through scattered undergrowth.

10.40 Old road, bears NW. and SE.

40.06 On rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked

$\frac{1}{4}$	S11
	S14

1925

Raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, N. of c

68.00 Enter rolling bench, bears NE. and S., 40 ft. high.

80.12 The cor. secs. 10, 11, 14 and 15, at W. edge of bench.

Land, level and rolling.

SUBDIVISION T. 24 S., R. 13 W.

Chains

Soil, deep sand and clay loam; 3rd rate.  
 Undergrowth, scattered sagebrush, shadscale, mountain  
 rush and yellow top.  
 No timber.  
 Fair grazing.


N. 0°01' W., bet. secs. 10 and 11.

Over level land through scattered undergrowth.

40.00

On level land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the  
 ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.



Dig pits, 18 x 18 x 12 ins., N. and S. of post, 3 ft.  
 dist. Also, deposit a lava stone, 7 x 3 x 2 ins., at  
 base of post, marked with a cross (X).

60.00

Wash, 4 lks. wide,  $1\frac{1}{2}$  ft. deep, drains E.


75.25

Road, bears NW. and SE.

80.00

On level land.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in  
 the ground, for cor. secs. 2, 3, 10 and 11, with brass  
 cap marked.



Deposit a lava stone, 10 x 8 x 5 ins., at base of post,  
 marked with a cross (X).

No other suitable accessories available and soil too  
 loose for pits.

Land, level and rolling.

Soil, deep clay and sandy loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain  
 rush and yellow top.

No timber.

Fair grazing.

## SUBDIVISION T. 24 S., R. 13 W.

Chains	S. 89°48' E., on random line bet. secs. 2 and 11.	
40.00	Set temp. $\frac{1}{2}$ sec. cor.	
80.10	Intersect the N. and S. line, 16 lks. S. of the cor. sec. 1, 2, 11 and 12.	
	Thence,	
	. 89°55' W., on true line bet. secs. 2 and 11.	
	Over rolling land through scattered undergrowth.	
25.00	Base of gradual ascent over bench land, bears NE. and SW	
40.05	At W. edge of top of bench, bears NE. and SW.	
	Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in th ground to solid rock and 18 ins. in a mound of stone, for $\frac{1}{2}$ sec. cor., with brass cap marked.	
	$\begin{array}{r} S2 \\ \frac{1}{2} \hline S11 \\ 1925 \end{array}$	
	Deposit a limestone, 6 x 4 x 4 ins., at base of post, marked with a cross (X).	
80.10	The cor. sec. s. 2, 3, 10 and 11.	
	Land, rolling and broken.	
	Soil, deep and shallow clay and sandy loam; 3rd rate.	
	Undergrowth, scattered sagebrush, shedscale, mountain rush and yellow top.	
	No timber.	
	Fair grazing.	
	<hr/>	
	N. 0°01' E., on random line bet. secs. 2 and 3.	
40.00	Set temp. $\frac{1}{2}$ sec. cor.	
80.27	Intersect the N. bdy. of the township, 19 lks. W. of the cor. secs. 2, 3, 34 and 35.	
	Thence,	
	S. 0°09' W., on true line bet. secs. 2 and 3.	
	Over rolling land through scattered undergrowth.	
40.27	On rolling land.	
	Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{2}$ sec. cor., with brass cap marked.	

-33-

## SUBDIVISIONS T. 24 S., R. 13 W.

S3    ↑    S2  
       |    1925

Deposit a limestone, 6x4x4 ins., at base of post marked with a cross (X).

No other suitable accessories available and soil too loose for pits.

45.00 Old road bears NE. and SW.

80.27 The cor. secs. 2, 3, 10 and 11.

Land, rolling.

Soil, deep sand and clay loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

From the cor. secs. 3, 4, 33 and 34, on the S. bdy. of the township, which is an iron post, 2 ins. diam., with brass cap, set, marked, and witnessed as described in the finished notes of the survey T. 25 S., R. 13 W.

N. 0° 02' W., bet. secs. 33 and 34

Over level land through scattered undergrowth.

40.00 On level land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor.; with brass cap marked

S33    ↑    S34  
       |    1925

Deposit a lava stone, 6x6x3 ins. at base of post marked with a cross (X).

No other suitable accessories available and soil too loose for pits.

80.00 On level land.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. secs. 27, 28, 33 and 34, with brass cap marked

## SUBDIVISION, T. 24 S., R. 13 W.

chains

T24S	R13W
S28	S27
S33	S34
1925	

Raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, W. of  
Cor.

Land, level.

Soil, deep sand and clay loam; 3rd. rate.

Undergrowth, scattered sagebrush, shadscale, mountain  
rush, and yellow top.

No timber.

Fair grazing.

S.  $89^{\circ} 47' E.$  on random line bet. secs. 27 and 34.

40.00 Set temp.  $\frac{1}{4}$  sec.cor.

80.04 Intersect the N. and S. line, 3 lks. S. of the cor.  
secs. 26, 27, 34 and 35.

Thence

N.  $89^{\circ} 48' W.$  on true line bet. secs. 27 and 34.

Over level and rolling land through scattered undergrowth

40.02 On rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the  
ground, for  $\frac{1}{4}$  sec.cor., with brass cap marked

$\frac{1}{4}$	S 27
	-----
	S 34
	1925

Deposit a quartzite,  $4 \times 3 \times 2$  ins., at base of post, marked  
with a cross (X).

No other suitable accessories available and soil too  
loose for pits.

80.04 The cor. secs. 27, 28, 33 and 34.

Land, level and rolling.

Soil, deep clay and sandy loam; 3rd. rate.

Undergrowth, scattered sagebrush, shadscale, mountain  
rush and yellow top.

No timber.

Fair grazing.

SUBDIVISION T. 24 S., R. 13 W.

Chains


N. 0°02' W., bet. secs. 27 and 28.

Over level and rolling land through scattered undergrowth.

10.00 Enter rolling top of bench, bears E. and W.

40.00 On rolling bench land.


Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.



Dig pits, 18 x 18 x 12 ins., N. and S. of post, 3 ft. dist. also, deposit a quartzite, 5 x 5 x 1 ins., at base of post, marked with a cross (X).

80.00 On rolling bench land.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. secs. 21, 22, 27 and 28, with brass cap marked.



Dig pits, 18 x 18 x 12 ins., in each sec., 3 ft. dist. from post.

Land, level and rolling.

Soil, deep clay and sandy loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

S. 89°48' E., on random line bet. secs. 22 and 27.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

80.04 Intersect the N. and S. line, 5 lks. N. of the cor. secs. 22, 23, 26 and 27.

Thence,

N. 89°46' W., on true line bet. secs. 22 and 27.

Over rolling land through scattered undergrowth.

4.50 Road, bears N. 80° W. and S. 80° E.

## SUBDIVISION, T. 24 S., R. 13 W.

Chains

40.02 On rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

$$\begin{array}{c} \text{S22} \\ \frac{1}{4} \text{ ---} \\ \text{S27} \end{array}$$

1925

Dig pits, 18 x 18 x 12 ins., E. and W. of post, 3 ft. dist. Also, deposit a lava stone, 6 x 6 x 3 ins., at base of post, marked with cross (X).

60.00 Base of gradual ascent on E. slope of bench, bears NE. and S.

75.00 Top of bench, 40 ft. high, bears N. and S.

80.04 The cor. secs. 21, 22, 27 and 28.

Land, rolling.

Soil, deep clay and sandy loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

N. 0°02' W., bet. secs. 21 and 22.

Over rolling bench land through scattered undergrowth.

23.00 Road, bears N. 70° W. and S. 70° E.

40.00 On rolling bench land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

$$\begin{array}{c} \frac{1}{4} \\ \text{S21} \text{ --- } \text{S22} \\ \text{1925} \end{array}$$

Deposit a quartzite, 6 x 6 x 4 ins., at base of post, marked with a cross (X).

No other suitable accessories available and soil too loose for pits.

80.00 On rolling bench land.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. secs. 15, 16, 21 and 22, with

SUBDIVISION, T. 24 S., R. 13 W.

chains

brass cap marked.

T24S	R13W
S16	S18
S21	S22

1925

Dig pits, 18 x 18 x 12 ins., in each sec., 3 ft. dist. from post.

Land, rolling.

Soil, deep clay and sandyloam; rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

S. 89°46' E., on random line bet. secs. 15 and 22.

40.00 Set temp. ¼ sec. cor.

80.02 Intersect the N. and S. line, 3 lbs. S. of the cor. secs. 14, 15, 22 and 23.

Thence,

N. 89°45' W., on true line bet. secs. 15 and 22.

Over rolling bench land through scattered undergrowth.

40.01 At base of bench, bears NE. and SW.

Set an iron post, 3 ft. long, 1 in. diam., 17 ins. in the ground, for ¼ sec. cor., with brass cap marked.

S15
¼
S22

1925

Dig pits, 18 x 18 x 12 ins., on line, E. and W. of post, 3 ft. dist.

50.00 Top of bench, 40 ft. high, bears NE. and SW.

80.02 The cor. secs. 15, 16, 21 and 22.

Land, rolling.

Soil, deep clay and sandyloam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

SUBDIVISION, T. 24 S., R. 13 W.


Chains

N. 0°02' W., bet. secs. 15 and 16.

Over rolling land through scattered undergrowth.

40.00 On rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/4 sec. cor., with brass cap marked.




Deposit a lava stone, 6 x 3 x 3 ins., at base of post, marked with a cross (X).

No other suitable accessories available and soil too loose for pits.

80.00 On rolling land.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. secs. 9, 10, 15 and 16, with brass cap marked.



Deposit a lava stone, 4 x 4 x 3 ins., at base of post, marked with a cross (X).

No other suitable accessories available and soil too loose for pits.

Land, rolling.

Soil, deep clay and sandyloam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

S. 89°45' E., on random line bet. secs. 10 and 15.

40.00 Set temp. 1/4 sec. cor.

80.02 Intersect the N. and S. line, 5 lks. N. of the cor. secs. 10, 11, 14 and 15,

Thence,

N. 89°43' W.


SUBDIVISION, T. 24 S., R. 13 W.

Chains

Over rolling bench land through scattered undergrowth.

40.01 On rolling bench land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.



Dig pits, 18 x 18 x 12 ins., E. and W. of post, 3 ft. dist. Also, deposit a lava stone, 6 x 3 x 2 ins., at base of post, marked with a cross (X).

80.02 The cor. secs. 9, 10, 15 and 16.

Land, rolling benches.

Soil, deep clay and sandy loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.


Fair grazing.

N. 0°02' W., bet. secs. 9 and 10.

Over rolling bench land through scattered undergrowth.

40.00 On rolling bench land.


Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.



Dig pits; 18 x 18 x 12 ins., N. and S. of post, 3 ft. dist. Also, deposit a limestone, 6 x 4 x 4 ins., at base of post, marked with a cross (X).

80.00 On rolling bench land.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. secs. 3, 4, 9 and 10, with brass cap marked.



## SUBDIVISION, T. 24 S., R. 13 W.

Chains

Dig pits, 18 x 18 x 12 ins., in each sec., 3 ft. dist. from post. Also, deposit a limestone, 5 x 4 x 2 ins. at base of post, marked with a cross (X).

Land, rolling benches.

Soil, deep clay and sandy loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

S. 89°43' E., on random line bet. secs. 3 and 10.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

80.02 Intersedt the N. and S. line, 5 lks. S. of the cor. secs. 2, 3, 10 and 11.

Thence,

N. 89°45' W., on true line bet. secs. 3 and 10.

Over level bench land through scattered undergrowth.

4.10 Road, bears NW. and SE.

40.01 On level bench land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

$$\frac{S3}{\frac{1}{4} \text{ --- } S10}$$

1925

Dig pits, 18 x 18 x 12 ins., E. and W. of post, 3 ft. dist. Also, deposit a limestone, 6 x 5 x 2 ins., at base of post, marked with a cross (X).

80.02 The cor. secs. 3, 4, 9 and 10.

Land, level benches.

Soil, deep clay and sandy loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

## SUBDIVISION, T. 24 S., R. 13 W.

## Chains

N. 0°08' E., on random line bet. secs. 3 and 4.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

80.13 Intersect the N. bdy. of the township, 5 lks. E. of the cor. secs. 3, 4, 33 and 34.

Thence,

S. 0°06' W., on true line bet. secs. 3 and 4.

Over rolling land through scattered undergrowth.

12.60 Wash, 15 lks. wide, 2 ft. deep, drains SE.

40.13 On rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

$\frac{1}{4}$   
 S4 | S3  
 1925

Dig pits, 18 x 18 x 12 ins., N. and S. of post, 3 ft. dist. Also, deposit a limestone, 4 x 3 x 2 ins., at base of post, marked with a cross (X).

59.00 Wash, 20 lks. wide, 3 ft. deep, drains SW.

69.50 Recross same wash, drains S. 40° E.

80.13 The cor. secs. 3, 4, 9 and 10.

Land, rolling.

Soil, deep clay and sandy loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

From the cor. secs. 4, 5, 32 and 33, on the S. bdy. of the township, which is an iron post, 2 ins. diam., with brass cap, set, marked and witnessed as described in the finished notes of the survey T. 25 S., R. 13 W. N. 0°03' W., bet. secs. 32 and 33.

Over level land through scattered undergrowth.

40.00 On level land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

## SUBDIVISION, T. 24 S., R. 13 W.

Chains

$\frac{1}{4}$   
 S32 | S33  
 1925

Dig pits, 18 x 18 x 12 ins., N. and S. of post, 3 ft. dist. Also, deposit a trachyte, 6 x 6 x 5 ins., at base of post, marked with a cross (X).

80.00 On level land.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. secs. 28, 29, 32 and 33, with brass cap marked.

T24S	R13W
S29	S28
S32	S33

  
 1925

Dig pits, 18 x 18 x 12 ins., in each sec., 3 ft. dist. from post. Also, deposit a limestone, 6 x 5 x 2 ins., at base of post, marked with a cross (X).

Land, level.

Soil, deep clay and sandy loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

S. 89°47' E., on random line bet. secs. 28 and 33.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

80.06 Intersect the N. and S. line, 3 lks. S. of the cor. secs. 27, 28, 33 and 34.

Thence,

N. 89°48' W., on true line bet. secs. 28 and 33.

Over level land through scattered undergrowth.

40.03 On level land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

S28
$\frac{1}{4}$
S33

  
 1925

SUBDIVISION, T. 24 S., R. 13 W.

Raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.

80.06 The cor. secs. 28, 29, 32 and 33.

Land, rolling, with a general southerly exposure.

Soil, deep clay and sandy loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.


Fair grazing.

N. 0°03' W., bet. secs. 28 and 29.

Over level and rolling land through scattered undergrowth.

40.00 On rolling land.


Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for ¼ sec. cor., with brass cap marked.



Dig pits, 18 x 18 x 12 ins., N. and S. of post, 3 ft. dist. Also, deposit a lava stone, 6 x 4 x 3 ins., at base of post, marked with a cross (X).

80.00 On rolling land.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. secs. 20, 21, 28 and 29, with brass cap marked



Dig pits, 18 x 18 x 12 ins., in each sec., 3 ft. dist. from post. Also, deposit a limestone, 6 x 3 x 2 ins., at base of post, marked with a cross (X).

Land, level and rolling.

Soil, deep clay and sandy loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

## SUBDIVISION, T. 24 S., R. 13 W.

## Chains

S. 89°48' E., on random line bet. secs. 21 and 28.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

80.04 Intersect the N. and S. line, 5' lks. N. of the cor. secs.  
21, 22, 27 and 28.

Thence,

N. 89°46' W., on true line bet. secs. 21 and 28.

Over level and rolling land through scattered undergrowth

40.02 On rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the  
ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

$$\begin{array}{r} \text{S21} \\ \frac{1}{4} \text{---} \\ \text{S28} \end{array}$$

1925

Deposit a lava stone, 4 x 4 x 2 ins., at base of post,  
marked with a cross (X).

No other suitable accessories available and soil too  
loose for pits.

80.04 The cor. secs. 20, 21, 28 and 29.

Land, rolling and level.

Soil, deep clay and sandy loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain  
rush and yellow top.

No timber.

Fair grazing.

N. 0°03' W., bet. secs. 20 and 21.

Over level and rolling land through scattered undergrowth.

40.00 On rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the  
ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

$$\begin{array}{r} \frac{1}{4} \\ \text{S20} \mid \text{S21} \\ 1925 \end{array}$$

Deposit a lava stone, 8 x 5 x 2 ins., at base of post,  
marked with a cross (X).

No other suitable accessories available and soil too

SUBDIVISION, T. 24 S., R. 13 W.

Chains

45.50 Road, bears W. and S. 70 ° E.

80.00 On rolling land.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. secs. 16, 17, 20 and 21, with brass cap marked.

T24S	R13W
S17	S16
S20	S21

1925

Dig pits, 18 x 18 x 12 ins., in each sec., 3 ft. dist. from post. Also, deposit a lava stone, 6 x 6 x 6 ins., at base of post, marked with a cross (X).

Land, rolling and level.

Soil, deep clay and sandy loam; 3rd rate.

Undergrowth, scattered sagebrush, shadescale, mountain rush and yellow top.

No timber.

Fair grazing.

S. 89°46' E., on random line bet. secs. 16 and 21.

40.00 Set temp. ¼ sec. cor.

80.08 Intersect the cor. secs. 15, 16, 21 and 22.

Thence,

N. 89°46' W., on true line bet. secs. 16 and 21.

Over rolling and level land through scattered undergrowth.

40.04 On rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for ¼ sec. cor., with brass cap marked.

¼	S16
	S21

1925

Dig pits, 18 x 18 x 12 ins., E. and W. of post, 3 ft. dist. Also, deposit a lava stone, 6 x 3 x 3 ins., at base of post, marked with a cross (X).

69.00 Old road, bears NW. and SE.

80.08 The cor. secs. 16, 17, 20 and 21.

Land, rolling and level.

## SUBDIVISION, T. 24 S., R. 13 W.

Chains

Soil, deep clay and sandyloam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain-rush and yellow top.

No timber.

Fair grazing.

N. 0°03' W., bet. secs. 16 and 17.

Over level and rolling land, through scattered undergrowth

9.00 Old road, bears NW. and SE.

40.00 On rolling land,

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.
$$\begin{array}{c} \uparrow \\ \frac{1}{4} \\ \text{S17} \downarrow \text{S16} \\ \text{1925} \end{array}$$

Dig pits, 18 x 18 x 12 ins., N. and S. of post, 3 ft. dist. Also deposit a lava stone, 4 x 3 x 2 ins., at base of post, marked with a cross (X).

80.00 On gradual W. slope of rocky knoll.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. secs. 8, 9, 16 and 17, with brass cap marked.

T24S	R13W
S8	S9
S17	S16
1925	

Deposit a limestone, 10 x 10 x 8 ins., at base of post, marked with a cross (X).

No other suitable accessories available and soil too loose for pits.

Land, rolling and broken.

Soil, deep clay and sandyloam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain-rush and yellow top.

No timber.

Fair grazing.

SUBDIVISION, T. 24 S., R. 13 W.

Chains

S. 89°46' E., on random line bet. secs. 9 and 16.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

80.08 Intersect the N. and S. line, 3 lks. N. of the cor. secs. 9, 10, 15 and 16.

Thence,

N. 89°45' W., on true line bet. secs. 9 and 16.

Over level and rolling land through scattered undergrowth.

40.04 On rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

$$\begin{array}{r} S9 \\ \frac{1}{4} \text{---} \\ S16 \\ 1925 \end{array}$$

Dig pits, 18 x 18 x 12 ins., E. and W. of post, 3 ft. dist. Also, deposit a limestone, 4 x 3 x 1 ins., at base of post, marked with a cross (X).

79.00 Top of rocky spur on S. slope of knoll, projects S., 2.00 chs. dist.

80.08 The cor. secs. 8, 9, 16 and 17.

Land, rolling and level.

soil, deep clay and sandy loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

N. 0°03' W., bet. secs. 8 and 9.

Over rolling land through scattered undergrowth.

40.00 On rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

$$\begin{array}{r} \frac{1}{4} \\ S8 \mid S9 \\ 1925 \end{array}$$

Raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

60.00 The E. point of small rocky knoll, 40 ft. above the  $\frac{1}{4}$

## SUBDIVISION, T. 24 S., R. 13 W.

Chains

sec. cor.

70.20 Swale, drains E., 6.00 chs. dist., thence S.

80.00 On ~~surface rock~~ at base of rocky knoll, bears E. and W.  
mark a cross (X), over which.Set an iron post, 3 ft. long, 2 ins. diam., 36 ins. in a  
mound of stone, for cor. secs. 4, 5, 8 and 9, with  
brass cap marked.

T24S	R13W
S5	S4
S8	S9
1925	

Land, rolling.

Soil, shallow clay and sandy loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain  
rush and yellow top.

No timber.

Fair grazing.

S. 89°45' E., on random line bet. secs. 4 and 9.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.80.08 Intersect the N. and S. line, 19 lks. S. of the cor. secs.  
3, 4, 9 and 10.

Thence,

N. 89°49' W., on true line bet. secs. 4 and 9.

Over rolling bench land through scattered undergrowth.

40.04 At base of knoll, bears NW. and SE.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the  
ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

$\frac{1}{4}$	S4
	S9
1925	

Raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$  ft. high, N. of cor.57.00 The S. point of limestone outcropping at top of knoll,  
50 ft. high.

68.00 Swale, 60 ft. below knoll, drains S.

80.08 The cor. secs. 4, 5, 8 and 9.

SUBDIVISION, T. 24 S., R. 13 W.

Chains

Land, rolling.

Soil, deep and shallow clay and sandy loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain  
rush and yellow top.

No timber.

Fair grazing.

N. 0°05' E., on random line bet. secs. 4 and 5.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

80.04 Intersect the N. bdy. of the township, 9 lks. W. of the  
cor. secs. 4, 5, 32 and 33.

Thence,


S. 0°09' W., on true line bet. secs. 4 and 5.

Over rolling land through scattered undergrowth.

4.00 Wash, 20 lks. wide, 3 ft. deep, drains S. 60° E.

40.04 On rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the  
ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.



Deposit a limestone, 4 x 3 x 2 ins., at base of post,  
marked with a cross (X).

No other suitable accessories available and soil too  
loose for pits.

58.00 Base of rocky knoll, bears E. and W.; thence ascend  
gradually along W. slope of knoll.

68.00 Top of rocky knoll on spur, 60 ft. above base; spur  
projects E.

80.04 The cor. secs. 4, 5, 8 and 9, 100 ft. below top of knoll.

Land, rolling.

Soil, shallow clay and sandy loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain  
rush and yellow top.

No timber..

Fair grazing.

SUBDIVISION, T. 24 S., R. 13 W.


Chains

From the cor. secs. 5, 6, 31 and 32, on the S. bdy. of the township, which is an iron post, 2 ins. diam., with brass cap, set, marked and witnessed as described in the finished notes of the survey T. 25 S., R. 13 W. N. 0°03' W., bet. secs. 31 and 32.

Over level land through scattered undergrowth.

40.00 On level land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.




Dig pits, 18 x 18 x 12 ins., N. and S. of post, 3 ft. dist. Also, deposit a lava stone, 4 x 4 x 4 ins., at base of post, marked with a cross (X).

55.00 Wash, 20 lks. wide, 2 ft. deep, drains S. 30° E.

80.00 On level land.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. secs. 29, 30, 31 and 32, with brass cap marked.



Deposit a lava stone, 7 x 6 x 4 ins., at base of post, marked with a cross (X).

No other suitable accessories available and soil too loose for pits.

Land, level.

Soil, deep clay and sandy loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

S. 89°47' E., on random line bet. secs. 29 and 32.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

## SUBDIVISION, T. 24 S., R. 13 W.

## Chains

80.04 Intersect the N. and S. line, 5 lks. N. of the cor. secs.  
28, 29, 32 and 33.

Thence,

N. 89°45' W., on true line bet. secs. 29 and 32.

Over level land through scattered undergrowth.

40.02 On level land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the  
ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

$$\begin{array}{r} \frac{1}{4} \text{ } \\ \hline \text{S29} \\ \text{S32} \\ 1925 \end{array}$$

Deposit a lava stone, 12 x 6 x 4 ins., at base of post,  
marked with a cross (X).

No other suitable accessories available and soil too  
loose for pits.

80.04 The cor. secs. 29, 30, 31 and 32.

Land, level.

Soil, deep clay and sandy loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain  
rush and yellow top.

No timber.

Fair grazing.

N. 89°47' W., on random line bet. secs. 30 and 31.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

77.74 Intersect the W. bdy. of the township, 5 lks. S. of the  
cor. secs. 25, 30, 31 and 36, which is an iron post,  
3 ins. diam., with brass cap, set, marked and witnessed  
as described in the finished notes of the survey  
T. 24 S., R. 14 W.

Thence,

S. 89°45' E., on true line bet. secs. 30 and 31.

Over level land through scattered undergrowth.

37.74 On level land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the  
ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

SUBDIVISION, T. 24 S., R. 13 W.

Chains

$\frac{1}{4}$ 

S30
—
S31

  
 1925

Dig pits, 18 x 18 x 12 ins., E. and W. of post, 3 ft. dist. Also, deposit a lava stone, 6 x 5 x 4 ins., at base of post, marked with a cross (X).

60.80 Wash, 30 lks. wide, 10 ft. deep, drains S. 30° E.

77.74 The cor. secs. 29, 30, 31 and 32.

Land, level.

Soil, deep clay and sandy loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

N. 0°03' W., bet. secs. 29 and 30.

Over level bench land through scattered undergrowth.

40.00 On level land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

$\frac{1}{4}$ 

S30		S29
-----	--	-----

  
 1925

Deposit a limestone, 6 x 4 x 2 ins., at base of post, marked with a cross (X).

No other suitable accessories available and soil too loose for pits.

80.00 On level land.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. secs. 19, 20, 29 and 30, with brass cap marked.

.T24S R13W		
S19		S20
—		
S30		S29

  
 1925

Deposit a limestone, 8 x 3 x 2 ins., at base of post, marked with a cross (X).

SUBDIVISION, T. 24 S., R. 13 W.

Chains

No other suitable accessories available and soil too loose for pits.

Land, level benches.

Soil, deep clay and sandy loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

S. 89°45' E., on random line bet. secs. 20 and 29.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

80.02 Intersect the N. and S. line, at the cor. secs. 20, 21, 28 and 29.


Thence,

N. 89°45' W., on true line bet. secs. 20 and 29.

Over rolling land through scattered undergrowth.

40.01 At base of spur, bears N. 30° E. and S. 30° W.

Set an iron post, 5 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.



Deposit a lava stone, 8 x 6 x 2 ins., at base of post, marked with a cross (X).

No other suitable accessories available and soil too loose for pits.

47.40 Top of spur, 30 ft. high, projects S. 30° W.

80.02 The cor. secs. 19, 20, 29 and 30.

Land, rolling.

Soil, deep clay and sandy loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

N. 89°45' W., on random line bet. secs. 19 and 30.

## SUBDIVISION, T. 24 S., R. 13 W.

- Chairs
- 40.00 Set temp.  $\frac{1}{4}$  sec. cor.
- 77.73 Intersect the W. bdy. of the township, 9 lks. N. of  
 cor. secs. 19, 24, 25 and 30, which is an iron post  
 3 ins. diam., with brass cap, set, marked and witness  
 as described in the finished notes of the survey  
 T. 24 S., R. 14 W.
- Thence,  
 S. 89°49' E., on true line bet. secs. 19 and 30.  
 Over level land through scattered undergrowth.
- 5.20 Wash, 40 lks. wide, 6 ft. deep, drains S. 30° E.
- 37.73 On level land.  
 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the  
 ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.
- $$\begin{array}{r} S19 \\ \frac{1}{4} \\ S30 \\ 1925 \end{array}$$
- Deposit a limestone, 4 x 4 x 2 ins., at base of post,  
 marked with a cross (X).
- No other suitable accessories available and soil too  
 loose for pits.
- 77.73 The cor. secs. 19, 20, 29 and 30.  
 Land, level.  
 Soil, deep clay and sandy loam; 3rd rate.  
 Undergrowth, scattered sagebrush, shadscale, mountain  
 rush and yellow top.  
 No timber.  
 Fair grazing.
- 
- N. 0°03' W., bet. secs. 19 and 20.  
 Over rolling land through scattered undergrowth.
- 40.00 On rolling land.  
 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the  
 ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

$$\begin{array}{r} \frac{1}{4} \\ S19 | S20 \end{array}$$

1925

SUBDIVISION, T. 24 S., R. 13 W.

Chains

Deposit a limestone, 5 x 4 x 2 ins., at base of post, marked with a cross (X).

No other suitable accessories available and soil too loose for pits.

54.20 Road, bears E. and W.

60.00 Base of rocky spur, bears S. 70° W. and N. 70° E. for 15.00 chs., thence S.

80.00 On gradual S. slope of rocky spur, 40 ft. above the  $\frac{1}{4}$  sec. cor.

Set an iron post, 3 ft. long, 2 ins. diam., 6 ins. in the ground to solid rock and 30 ins. in a mound of stone, for cor. secs. 17, 18, 19 and 20, with brass cap marked.

T24S	R13W
S18	S17
S19	S20

1925

Deposit a limestone, 10 x 8 x 6 ins., at base of post, marked with a cross (X).

Land, rolling.

Soil, deep and shallow clay and sandy loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

S. 89°45' E., on random line bet. secs. 17 and 20.

40.00 Set temp. sec. cor.

80.02 Intersect the N. and S. line, 3 lks. S. of the cor. secs. 16, 17, 20 and 21.

Thence,

N. 89°46' W., on true line bet. secs. 17 and 20.

Over rolling land through scattered undergrowth.

30.00 Base of spur, bears N. and S.

40.01 On rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 8 ins. in the ground to solid rock and 28 ins. in a mound of stone, for  $\frac{1}{4}$  sec. cor. with brass cap marked.

Chains

S17  
 $\frac{1}{4}$  —————  
 S20

1925

Deposit a lava stone, 4 x 3 x 2 ins., at base of post, marked with a cross (X).

42.70 Spur, 40 ft. high, projects S.

55.00 Swale, 40 ft. below spur, drains S.

80.02 The cor. secs. 17, 18, 19 and 20, 90 ft. above swale.

Land, rolling.

Soil, shallow clay, sand, and rock; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

N. 89°49' W., on random line bet. secs. 18 and 19.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

77.75 Intersect the W. bdy. of the township, 3 lks. N. of the cor. secs. 13, 18, 19 and 24, which is an iron post, 3 ins. diam., with brass cap, set, marked and witnessed as described in the finished notes of the survey T. 24 S., R. 14 W.

Thence,

S. 89°50' E., on true line bet. secs. 18 and 19.

Over rolling land through scattered undergrowth.

5.60 Wash, 15 lks. wide, 2 ft. deep, drains S. 20° E.

23.50 Road, bears NW. and SE.

37.75 On rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

S18  
 $\frac{1}{4}$  —————  
 S19

1925

Deposit a limestone, 5 x 5 x 2 ins., at base of post, marked with a cross (X).

No other suitable accessories available, and soil too loose for pits.

SUBDIVISION, T. 24 S., R. 13 W.


Chains  
 66.20 Base of gradual ascent over W. slope of rocky spur, bears N. and S.  
 77.75 The cor. secs. 17, 18, 19 and 20, 110 ft. above base of spur.  
 Land, rolling.  
 Soil, shallow clay and sandy loam; 3rd rate.  
 Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.  
 No timber.  
 Fair grazing.

N. 0°03' W., bet. secs. 17 and 18.

Over rolling land through scattered undergrowth.

23.00 Top of rocky spur, 50 ft. above cor., projects W.; descend abrupt N. slope.


40.00 At base of spur, 120 ft. below top, bears E. and W.  
 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.



Raise a mound of stone, 3 ft. base, 1 $\frac{1}{2}$  ft. high, W. of cor.

54.20 Old road, bears NW. and SE

80.00 On rolling land.  
 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. secs. 7, 8, 17 and 18, with brass cap marked.



Dig pits, 18 x 18 x 12 ins., in each sec., 3 ft. dist. from post. Also, deposit a limestone, 8 x 6 x 3 ins., at base of post, marked with a cross (X).

Land, rolling.  
 Soil, shallow clay and sandy loam; 3rd rate.  
 Undergrowth, scattered sagebrush, shadscale, mountain

## SUBDIVISION, T. 24 S., R. 13 W.

## Chains

rush and yellow top.

No timber.

Fair grazing.

S. 89°46' E., on random line bet. secs. 8 and 17.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

80.00 Intersect the cor. secs. 8, 9, 16 and 17.

Thence,

N. 89°46' W., on true line bet. secs. 8 and 17.

Over level land through scattered undergrowth.

40.00 On level land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

$$\begin{array}{r} S8 \\ \frac{1}{4} \\ \hline S17 \\ 1925 \end{array}$$

Dig pits; 18 x 18 x 12 ins., E. and W. of post, 3 ft.

dist. Also, deposit a limestone, 6 x 5 x 5 ins., at base of post, marked with a cross (X).

80.00 The cor. secs. 7, 8, 17 and 18.

Land, level.

Soil, deep clay and sandy loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

N. 89°50' W., on random line bet. secs. 7 and 18.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

77.72 Intersect the W. bdy. of the township, 5 lks. S. of the cor. secs. 7, 12, 13 and 18, which is an iron post, 3 ins. diam., with brass cap, set, marked and witnessed as described in the finished notes of the survey T. 24 S., R. 14 W.

Thence,

S. 89°48' E., on true line bet. secs. 7 and 18.


SUBDIVISION, T. 24 S., R. 13 W.

ains

Over rolling land through scattered undergrowth.

67.72 On rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.



1925

Deposit a limestone, 8 x 6 x 2 ins., at base of post, marked with a cross (X).

No other suitable accessories available and soil too loose for pits.

77.72 The cor. secs. 7, 8, 17 and 18.

Land, rolling.

Soil, deep clay and sandy loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.


Fair grazing.

N. 0°03' W., bet. secs. 7 and 8.

Over rolling land through scattered undergrowth.

40.00 On rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.



1925

Dig pits, 18 x 18 x 12 ins., N. and S. of post, 3 ft. dist. Also, deposit a limestone, 6 x 5 x 1 ins. at base of post, marked with a cross (X).

53.00 Wash, 15 lks. wide, 2 ft. deep, drains S. 30° E.

80.00 On rolling land.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. secs. 5, 6, 7 and 8, with brass cap marked.

## SUBDIVISION, T. 24 S., R. 13 W.

Chains

T24S	R13W
S6	S5
S7	S8

1925

Raise a mound of stone, 2 ft. base, 1½ ft. high, W. of e  
Land, rolling.

Soil, deep clay and sandy loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain  
rush and yellow top.

No timber.

Fair grazing.

S. 89°46' E., on random line bet. secs. 5 and 8.

40.00 Set temp. ¼ sec. cor.

80.02 Intersect the N. and S. line, at the cor. secs. 4, 5,  
8 and 9.

Thence,

N. 89°46' W., on true line bet. secs. 5 and 8.

Over rolling bench land through scattered undergrowth.

40.01 On rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the  
ground, for ¼ sec. cor., with brass cap marked.

S5
¼
S8

1925

Deposit a limestone, 8 x 4 x 3 ins., at base of post,  
marked with a cross (X).

No other suitable accessories available and soil too  
loose for pits.

43.80 Top of ascent on broken S. slope of spur, 110 ft. high,  
bears N. and S.

80.02 The cor. secs. 5, 6, 7 and 8.

Land, rolling.

Soil, shallow clay, sand and rock; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain  
rush and yellow top.

No timber. Fair grazing.

SUBDIVISION, T. 24 S., R. 13 W.

Chains

N. 89°48' W., on random line bet. secs. 6 and 7.

40.00 Set temp. 4 sec. cor.

77.74 Intersect the W. bdy. of the township, 3 lks. N. of the cor. secs. 1, 6, 7 and 12, which is an iron post, 3 ins. diam., with brass cap, set, marked and witnessed as describe in the finished notes of the survey T. 24 S., R. 14 W.

Thence,

S. 89°49' E., on true line bet. secs. 6 and 7.

Over broken land through scattered undergrowth.

4.40 Rocky spur, 40 ft. above cor., projects S.

22.70 Road in wash, 200 ft. below spur; wash drains S., 15 lks. wide, 3 ft. deep; road, bears N. and S.

37.74 On gradual W. slope of spur, 80 ft. above wash.

Set an iron post, 2 ft. long, 1 in. diam., 6 in. in the ground to solid rock and 20 ins. in a mound of stone, for sec. cor., with brass cap turned.

$$\frac{SC}{S7}$$

1915

Deposit of limestone, 8 x 8 x 6 ins., at base of post, marked with a cross (X).

41.50 Spur, 30 ft. above the 4 sec. cor., projects S.

55.70 Base of spur, 130 ft. below top, bears N. and S.

64.70 Old road, bears NE. and SW.

65.40 Wash, 15 lks. wide, 2 ft. deep, drains S. 30° E.

77.74 The cor. secs. 5, 6, 7 and 8.

Land, rolling.

Soil, shallow clay and sandy loam; rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

N. 0°09' E., on random line bet. secs. 5 and 6.

## SUBDIVISION T. 24 S., R. 13 W.

## Chains

43.50 Set temp.  $\frac{1}{4}$  sec. cor.

79.97 Intersect the N. bdy. of the township, 7 lks. E. of the  
cor. secs. 5, 6, 31 and 32.

Thence,

S.  $0^{\circ}06'$  W., on true line bet. secs. 5 and 6.

Over broken land through scattered undergrowth.

14.50 Ravine, 330 ft. below cor., drains S.  $20^{\circ}$  E.

84.50 Rocky spur, 60 ft. above ravine, projects SE.

39.97 On gradual SW. slope of spur, 60 ft. below top.

Set an iron post, 3 ft. long, 1 in. diam., 6 ins. in the  
ground to bedrock and 30 ins. in a mound of stone,  
for  $\frac{1}{4}$  sec. cor., with brass cap marked.

$\frac{1}{4}$   
 S6 | S5  
 1925

Deposit a limestone, 6 x 6 x 4 ins., at base of post,  
marked with a cross (X).

57.99 Road, bears NE. and SW.

79.97 The cor. secs. 5, 6, 7 and 8, 170 ft. below the  $\frac{1}{4}$  sec.  
cor.

Land, broken.

Soil, shallow rocky clay and sandy loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain  
rush and yellow top.

No timber.

Fair grazing.

CLOSING ERRORS, T. 24 S., R. 13 W.

Lines designated	True bearings.	Dist-ances. Chs.	Latitudes		Departures	
			N. Chs.	S. Chs.	E. Chs.	W. Chs.
S. Bdy.	T24S R13W S. 89°47' E.	477.73	.....	1.82	477.73	.....
E. Bdy.	T24S R13W North	480.00	480.00	.....	.....	.....
N. Bdy.	T24S R13W N. 89°48' W.	478.02	1.67	.....	.....	478.02
W. Bdy.	T24S R13W South	480.00	.....	480.00	.....	.....
Convergency	West	.58	.....	.....	.....	.58
			<u>481.67</u>	<u>481.82</u>	<u>477.73</u>	<u>478.60</u>
Errors in latitudes and departures				<u>481.67</u>		<u>477.73</u>
				0.15		0.87

GENERAL DESCRIPTION.

All of the lands within the boundaries of this township except the NW. portion, consist of level and rolling benches. The SW. portion is broken by limestone hills.

The west portion has a general south-asterly exposure and drainage, while the east portion has a northerly exposure and drainage.

The soil of the east portion of the township, consists of a deep heavy clay, while that of the west portion consists of a deep gravelly sand and clay loam and may be classified as 3rd rate.

The entire township is covered with a scattered undergrowth of sagebrush, shadscale, mountain rush, yellow top and grass, which affords fair grazing for stock during the winter months.

No timber, water, mineral, nor settlers were found on the township.

The township in general is suitable for stock grazing during the winter months when it is covered with snow, it being impracticable to graze the township during the summer months on account of there being no water.

No portion of the township is suitable for farming.

Numerous wagon roads were found throughout the township, making it practicable to reach all portions by wagon.

**Blank**

**Page**



CADASTRAL ENGINEER  
CERTIFICATE OF UNITED STATES/SURVEYORXXX

Cadastral Engineer

I, Ralph Gentry, U. S. Surveyor, hereby certify upon honor that, in pursuance of special instructions received from the U. S. Surveyor General for Utah bearing date of the 19th day of March, 19 21, I have well, faithfully, and in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, surveyed all those parts or portions of independent resurvey of the north and east boundaries and survey of the subdivision of T. 24 S., R. 13 W.

of the Salt Lake Base and and Meridian, in the State of Utah, which are represented and date diagram on dates shown on said diagram the foregoing field notes, as having been executed by me, and under my direction, and that all the corners said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the U. S. Surveyor General for Utah and in the specific manner described in the field notes, and that the foregoing are the original field notes of such survey.

Signed April 28, 1927  
at Salt Lake City, Utah.

*Ralph Gentry*  
U.S. Cadastral Engineer

APPROVAL.

Office of the United States Supervisor of Surveys  
~~OFFICE OF THE UNITED STATES SURVEYOR GENERAL~~

Denver, Colorado, DEC 10 1928, 19

The foregoing field notes of the ~~survey~~ independent resurvey of the north and east boundaries and survey of the subdivision of Township No. 24 South, Range No. 13 West of the Salt Lake Base and Meridian, Utah

executed by Ralph Gentry, U.S. Cadastral Engineer

under his special instructions dated March 19, 1921, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

*Samuel Johnson*  
U. S. Supervisor of Surveys.

I certify that the foregoing transcript of the field notes of the above described surveys in has been correctly copied from the original notes on file in this office.

**Blank**

**Page**

**Blank**

**Page**

Bird,  
Surveyor, G.L.O.

"D"

1-070

BOOK A-481

**RECEIVED**

MAY 28 1927

District Cadastral Engineer,  
Salt Lake City, Utah

# FIELD NOTES

OF THE ~~SURVEY OF THE~~

~~INDEPENDENT~~ RESURVEY OF THE FOURTH STANDARD PARALLEL SOUTH THROUGH

RANGE 13 WEST; EAST BOUNDARY, OR SEVIER LAKE GUIDE MERIDIAN;

WEST BOUNDARY, AND SURVEY OF SUBDIVISION OF T. 21 S., R. 13 W.

Of the Salt Lake Base and Meridian,

In the State of Utah

EXECUTED BY

William W. Bandy

In the capacity of U. S. Surveyor, under instructions dated March 19, 1921,

issued by the United States Surveyor General to govern surveys included in

Group No. 101, which were approved by the Commissioner of the General Land

Office, March 25, 1921, pursuant to authority contained in the Act of

Congress dated \_\_\_\_\_, 19\_\_\_\_ Supplemental Assignment Instructions  
dated May 5, 1925.

Survey commenced July 11, 1925.

Survey completed October 14, 1925.

Book 481

# INDEX DIAGRAM.

Township 21 South, Range 13 West

	4	5	6	7	8	9	
20	69	56	46	37	28	1	14
	68	55	45	36	28		
19	67	54	44	36	27	12	14
	66	53	44	35	26		
18	64	52	43	34	25	13	13
	64	52	42	33	25		
18	62	51	41	33	24	24	12
	61	50	41	32	23		
17	59	49	40	31	22	25	11
	59	48	39	30	22		
16	57	47	38	29	21	26	10

T. 21 S., R. 13 W.

DATE DIAGRAM

	10-5-25	10-5-25	10-5-25	10-5-25	10-5-25	10-5-25
7-21-25	10-5-25	7-27-25	7-25-25	7-13-25	7-14-25	7-24-25
	6	5	4	3	2	1
7-29-25	7-29-25	7-29-25	7-29-25	7-17-25	7-17-25	7-17-25
7-21-25	7-27-25	7-25-25	7-17-25	7-17-25	7-24-25	7-11-25
	7	8	9	10	11	12
7-28-25	7-27-25	7-25-25	7-17-25	7-17-25	7-24-25	7-11-25
	18	17	16	15	14	13
7-21-25	7-27-25	7-25-25	7-17-25	7-17-25	7-16-25	7-11-25
	19	20	21	22	23	24
7-23-25	7-23-25	7-15-25	7-17-25	7-14-25	7-16-25	7-11-25
	30	29	28	27	26	25
7-23-25	7-23-25	7-23-25	7-22-25	7-22-25	7-22-25	7-22-25
	31	32	33	34	35	36
7-21-25	7-20-25	7-15-25	7-17-25	7-14-25	7-16-25	7-11-25
	7-23-25	7-23-25	7-23-25	7-22-25	7-22-25	7-22-25
	7-21-25	7-21-25	7-21-25	7-21-25	7-21-25	7-21-25

All lines surveyed by Willis W. Dandy, U.S. Surveyor.

DESCRIPTION AND TESTS OF INSTRUMENTS.

Survey commenced July 11, 1925, and executed with Young and Son's solar transit No. 8513. The instrument is equipped with Smith solar attachment and full vertical circle. The horizontal limb has two verniers placed opposite to each other and reading to single minutes of arc, which is also the least count of the verniers of the latitude and declination arcs and vertical circle.

The instrument was approved for use on this survey,

T. 21 S., R. 13 W.

conditional upon satisfactory field tests by the Assistant Supervisor of Surveys for District No. 6, in supplemental assignment instructions dated May 5, 1925.

I examine the adjustments of the instrument and correct all errors. I then test the solar apparatus by comparing its indications resulting from solar observations made during a.m. and p.m. hours, with a meridian determined by observations made on Polaris as follows.

July 11, 1925: At my camp situated in the NE.  $\frac{1}{4}$  sec. 21, T. 21 S., R. 13 W., in approximated latitude  $38^{\circ}58'$  N. longitude  $113^{\circ}17'$  W.; at 0h 24m a.m. local mean time, I observe Polaris at eastern elongation, making four observations, two each with the telescope in direct and reversed positions, and mark the mean point in the line thus determined by a tack in a stake driven firmly in the ground about 10 chains to the N. of my station.

Azimuth of Polaris at eastern elongation =  $1^{\circ}25'$ .

I lay off the azimuth of Polaris,  $1^{\circ}25'$  to the W. and mark the meridian thus determined by a tack in a stake firmly driven in the ground about 10 chains N. of my station.

At 9h 00m a.m. apparent time, with the instrument in the meridian, I set off  $38^{\circ}58'$  N., on the latitude arc;  $22^{\circ}08'$  N., on the declination arc, and determine a meridian with the solar which I find to agree with the true meridian.

At apparent noon, with the instrument in the meridian, I make an altitude observation of the sun for time and latitude, observing simultaneously the altitude of the sun's upper limb and the transit of the sun's W. limb, reversing the telescope and observing simultaneously the altitude of the sun's lower limb and the transit of the sun's E. limb.

T. 21 S., R. 13 W.

Chains

Mean observed altitude=	73°09'
Reduced latitude=	38°58' N.
Mean watch time of observation=	12h 6m 20.0s
Watch fast of local mean time=	0h 1m 6.5s

At apparent noon, with the instrument in the meridian, and the latitude arc unchanged, I find the reading of the declination arc to be 22°07' N., which agrees with the computed declination of the sun.

At 3h 00m p.m. apparent time, with the instrument in the meridian and the latitude arc unchanged, I set off 22°06' N., on the declination arc, and determine a meridian with the solar, which I find to agree with the true meridian.

As all the solar observations made during the usual hours of solar work, come within 2' of the true meridian, I conclude that the instrument is in satisfactory adjustment.

The instrument was kept in good adjustment throughout the progress of this survey, frequent tests being made on the meridian established by observations made on Polaris as heretofore described.

For final test of the instrument near the completion of the survey of this township, see test given in the official records of the survey T. 21 S., R. 14 W.

MEASUREMENTS.

Unless otherwise specified, all measurements are made with Lallie steel tapes 5 chains in length, compared with a Lufkin standard steel tape 1 chain in length and found correct. The measurements are made on the slope, the vertical angle determined and the slope measurements properly reduced to true horizontal distances.

METHOD AND ORDER OF PROCEDURE

The S. bdy. of the township was surveyed under this group, the course being N. 89°48' W., the distance 477.29 chs. and the fractional distance placed in the western half

## METHOD AND ORDER OF PROCEDURE, T. 21 S., R. 13 W.

## Chains

mile.

An independent resurvey was made of the E. and W. boundaries and of the 4th Standard Parallel South which forms the N. bdy. of the township. The only cors. found on these boundaries were the standard cor. T. 20 S., R<sub>s</sub>. 12 and 13 W. and the closing cor. T. 21 S., R<sub>s</sub>. 12 and 13 W. The E. and W. boundaries were run N. to an intersection with the 4th standard parallel south where the closing cors. of T. 21 S., Rs. 12 and 13 W. and T. 21 S., Rs. 13 and 14 W. were set.

The township was subdivided in the regular manner, from the south to the north and east to the west. Fractional distances were placed against the west boundary and the standard parallel.

INDEPENDENT RESURVEY OF THE FOURTH STANDARD PARALLEL  
SOUTH THROUGH R. 13 W.

From the standard cor. of T. 20 S., R<sub>s</sub>. 13 and 14 W., which is an iron post, 3 ft. long, 3 ins. diam., set 27 ins. in the ground, with brass cap marked:

SC	
T20S	
R14W	R13W
S36	S31

1925

Witnessed by a mound of stone, 2 ft. base, 1½ ft. high,  
N. of cor.

Thence,

East, on the 4th standard parallel south through R. 13 W.,  
along the S. bdy. sec. 31.

Over rolling hills through scattered undergrowth.

8.25 Point for the closing cor. T. 21 S., Rs. 13 and 14 W.,  
hereinafter described.

13.50 Base of spur, bears N. and S. 20° E.; ascend gradual N.  
slope of spur.

40.00 On gradual N. slope of spur.

INDEPENDENT RESURVEY OF THE FOURTH STANDARD PARALLEL  
SOUTH THROUGH R. 13 W.

chains

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for standard  $\frac{1}{4}$  sec. cor., with brass cap marked:

SC  
 $\frac{1}{4}$  S31

1925

Deposit a quartzite, 6 x 4 x 2 ins., at base of post, marked with a cross (X).

No other suitable accessories available and soil too loose for pits.

66.00 Spur, 360 ft. above the township cor., projects S. 80° W.; descend gradual S. slope of spur.

80.00 On gradual S. slope of spur, 20 ft. below top.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for standard cor. secs. 31 and 32, with brass cap marked:

SC  
T20S | R13W  
S31 | S32

1925

Raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor. Land, rolling hills with a general northerly and southerly exposure and drainage.

Soil, shallow rocky clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

East, along the S. bdy. sec. 32.

Descend gradually over rolling hills through scattered undergrowth.

4.82 Point for the closing cor. secs. 5 and 6, T. 21 S., R. 13 W., hereinafter described.

5.20 Ravine, 20 ft. below cor., drains S. 20° W.; heads 5.00 chs. N.; ascend abrupt W. slope of ridge.

17.70 Ridge, 190 ft. above ravine, bears N. and S.; descend gradually over broken SE. slope.

INDEPENDENT RESURVEY FOURTH STANDARD PARALLEL 13  
THROUGH R. 13 W.

Chains

40.00 On broken SE. slope.

Set an iron post, 3 ft. long, 1 in. diam., 15 ins. in ground to solid rock and 15 ins. in a mound of stone for standard sec. cor., with brass cap marked.

S C  
+ S32

1925

Deposit a limestone, 6 x 4 x 2 ins., at base of post, marked with a cross (X).

80.00 On gradual S. slope, 120 ft. below ridge.

Set an iron post, 3 ft. long, 2 ins. diam., 15 ins. in the ground to solid rock and 15 ins. in a mound of stone, for standard cor. secs. 32 and 33, with brass cap marked.

S C  
T20S | R13W  
S32 | S33

1925

Deposit a limestone, 8 x 8 x 4 ins., at base of post, marked with a cross (X).

Land, rolling hills with a general southerly exposure and drainage.

Soil, shallow rocky clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

East, along the S. bdy. sec. 33.

Ascend gradual SW. slope of spur through scattered undergrowth.

1.80 Spur, 20 ft. above cor., projects SE; descend gradual NE. slope.

5.22 Point for the closing cor. secs. 4 and 5, T. 21 S., R. 13 W., hereinafter described.

7.60 Ravine, 100 ft. below spur, drains SE., heads 5.00 chs. NW.; ascend gradually over broken SW. slope.

INDEPENDENT RESURVEY FOURTH STANDARD PARALLEL SOUTH  
THROUGH R. 13 W.

## Chains

29.00 Spur, 90 ft. above ravine, projects SE.; descend gradual NE. slope.

40.00 At base of spur, bears NW. and SE.

Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground to solid rock and 18 ins. in a mound of stone, for standard sec. cor., with brass cap marked.

SC  
‡ S33

1925

Deposit a limestone, 4 x 4 x 1 ins., at base of post, marked with a cross (X).

45.25 Road at base of descent, bears NW. and SE., 160 ft. below spur; thence over shadscale flat.

80.00 On shadscale flat.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for standard cor. secs. 33 and 34, with brass cap marked.

S C	
T203	R13W
S33	S34

1925

Raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor. land, rolling hills with a general easterly exposure and drainage.

Soil, shallow and deep clay and sand loam; 3rd rat.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

East, along the S. bdy. sec. 34.

Over rolling bench land through scattered undergrowth.

5.23 Point for the closing cor. secs. 3 and 4, T. 21 S., R. 13W. hereinafter described.

14.50 Road, bears N. 20° E. and S. 20° W.

40.00 On rolling bench land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the

INDEPENDENT RESURVEY FOURTH STANDARD PARALLEL SOUTH  
THROUGH R. 13 W.

Chains	
	ground, for standard $\frac{1}{4}$ sec. cor., with brass cap marked
	<p style="text-align: center;">S C <u><math>\frac{1}{4}</math> S34</u></p>
	1925
70.00	Raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high N. of cor. Base of low spur, bears N. 60° E. and S. 60° W.; thence along gradual N. slope of spur.
80.00	On gradual N. slope of spur.
	Set an iron post, 3 ft. long, 2 ins. diam., 16 ins. in the ground to solid rock and 14 ins. in a mound of stone, for standard cor. secs. 34 and 35, with brass cap marked.
	<p style="text-align: center;">S C T20S   R13W <u>S34 <math>\frac{1}{4}</math> S35</u></p>
	1925
	Deposit a limestone, 8 x 6 x 3 ins., at base of post, marked with a cross (X).
	Land, rolling, with a general easterly exposure and drainage.
	Soil, shallow and deep clay and sand loam; 3rd rate.
	Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.
	No timber.
	Fair grazing.
5.51	East, along the S. bdy. sec. 35. Over rolling hills through scattered undergrowth. Point for the closing cor. secs. 2 and 3, T. 21 S., R. 13 W., hereinafter described.
33.00	Leave rolling N. slope of spur, bears N. 60° W. and SE.; thence over rolling bench land.
40.00	On rolling bench land.
	Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for standard $\frac{1}{4}$ sec. cor., with brass cap marked.

INDEPENDENT RESURVEY FOURTH STANDARD PARALLEL SOUTH  
THROUGH R. 13 W.

Chains

SC  
 $\frac{1}{4}$  S35

1925

Raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high N. of cor.

42.80 Road, bears N.  $20^{\circ}$  E. and S.  $20^{\circ}$  W.

80.00 On rolling bench land.

Set an iron post, 3 ft. long, .2 ins. diam., 27 ins. in  
the ground, for standard cor. secs. 35 and 36, with  
brass cap marked.

S	C
T20S	R13W
S35	S36

1925

Raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high N. of cor.

Land, rolling with a general easterly exposure and  
drainage.

Soil, shallow and deep clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain  
rush and yellow top.

No timber.

Fair grazing.

East, along the S. bdy. sec. 36.

Over rolling hills and bench land through scattered  
undergrowth.

4.30 Base of spur, bears N.  $20^{\circ}$  E. and SW.

5.61 Point for the closing cor. secs. 1 and 2, T. 21 S., R. 13  
W., hereinafter described.

11.50 Top of spur, 40 ft. high, projects N.

21.30 Base of spur, 80 ft. below top, bears N.  $30^{\circ}$  W. and S.  $20^{\circ}$   
E.; thence over rolling bench land.

34.40 Wash, 60 lks! wide, 6 ft. deep, course S.  $20^{\circ}$  E.

40.00 On rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the  
ground, for standard  $\frac{1}{4}$  sec. cor., with brass cap marked

INDEPENDENT RESURVEY OF THE SEVIER LAKE GUIDE MERIDIAN THROUGH T. 21 S., BETWEEN R. 12 AND 13 W.

Chains

S36

1925

44.70 Raise a mound of stone, 2 ft. base, 1 1/2 ft. high N. of Broken ledge, bears N. and S. 20° W.; thence over shaded flat

85.83 Intersect the Sevier Lake Guide Meridian or the W. bdy. T. 21 S., R. 12 W., South, 10.44' chs. dist. from the closing cor. T. 20 S., R. 13 W. and T. 21 S., R. 12 W. hereinafter described.

At point of intersection:

Set an iron post, 3 ft. long, 3 ins. diam., 27 ins. in the ground, for closing standard cor. Ts. 20 and 21 S., R. 13 W., with brass cap marked.

T20S	T21S
R13W	R12W
C S36	S6
C T21S	S1
R13W	
S1	

1925

Raise a mound of stone, 2 ft. base, 1 1/2 ft. high W. of cor. Land, level and broken with a general easterly exposure and drainage.

Soil, deep clay and sand loam; 2% rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

INDEPENDENT RESURVEY OF THE SEVIER LAKE GUIDE MERIDIAN THROUGH T. 21 S., BETWEEN R. 12 and 13 W.

From the cor. Ts. 21 and 22 S., Rs. 12 and 13 W., which is an iron post, 3 ins. diam., with brass cap, set,


marked and witnessed as described in the official records of the survey T. 22 S., R. 13 W.

North, bet. secs. 31 and 36, along the N. bdy. of the

INDEPENDENT RESURVEY SEVIER LAKE GUIDE MERIDIAN THROUGH  
T. 21 S., BETWEEN Rs. 12 and 13 W.


Chains

Over rolling bench land through scattered undergrowth.  
40.00 On rolling bench land.  
Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/4 sec. cor., with brass cap marked.



Raise a mound of stone, 3 ft. base, 1 1/2 ft. high W. of cor.  
43.00 Wash, 40 lks. wide, 3 ft. deep, course E.  
76.00 Wash, 30 lks. wide, 1 ft. deep, course E.  
80.00 On rolling bench land.

Set an iron post, 3 ft. long, 2 ins. diam., 16 ins. in the ground to solid rock and 16 ins. in a mound of stone, for c.r. secs. 25, 30, 31 and 36, with brass cap marked.



Deposit a limestone, 6 x 4 x 2 ins., at base of post, marked with a cross (X).

Land, rolling, with a general easterly exposure and drainage.

Soil, deep rocky clay and sand loam; ard rate.


Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

North, bet. secs. 25 and 30.

Over rolling bench land through scattered undergrowth.  
40.00 On rolling bench land.  
Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/4 sec. cor., with brass cap marked.



INDEPENDENT RESURVEY OF THE SEVEN LAKE COIN-SETTLEMENT  
 TRACT UGH T. 21 S., BETWEEN Rs. 12 and 13 W.

Chains

62.80 Raise a mound of stone, 2 ft. base, 1½ ft. high W. of  
 Wash, 30 lks. wide, 2 ft. deep, course E. 00.00  
 80.00 On rolling bench land.

Set an iron post, 3 ft. long, 2 ins. diam., 14 ins. in  
 the ground to solid rock and 16 ins. in a mound of  
 stone, for cor. secs. 19, 24, 25 and 30, with brass  
 cap marked .

T21S	
R13W	R12W
S24	S19
S25	S30

1925

Deposit a lava stone, 4 x 4 x 4 ins., at base of post,  
 marked with a cross (X).

Land, rolling, with a general easterly exposure and  
 drainage.

Soil, deep gravelly sand and clay loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain  
 rush and yellow top.

No timber.

Fair grazing.

North, bet. secs. 19 and 24.

Over rolling bench land through scattered undergrowth.

37.40 Wash, 20 lks. wide, 2 ft. deep, course E.

40.00 On rolling bench land.

Set an iron post, 3 ft. long, 1 in. diam., 6 ins. in the  
 ground to solid rock and 24 ins. in a mound of stone,  
 for 4 sec. cor., with brass cap marked.

¼	
S24	S19

1925

Deposit a lava stone, 6 x 6 x 4 ins., at base of post,  
 marked with a cross (X).

80.00 On rolling bench land.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in

INDEPENDENT RESURVEY SEVIER LAKE GUIDE MERIDIAN THROUGH  
T. 21 S., BETWEEN Rs. 12 and 13 W.

Chains

the ground, for cor. secs. 13, 18, 19 and 24, with brass cap marked.

T21S	
R13W	R12W
S13	S18
S24	S19

1925

Raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor. Land, rolling, with a general easterly exposure and drainage.

Soil, deep rocky clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

North, bet. secs. 13 and 18.

Over rolling bench land through scattered undergrowth.

5.40 Wash, 20 lks. wide, 3 ft. deep, course E.

40.00 On rolling bench land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for sec. cor., with brass cap marked.

T21S	
S13	S18
1925	

Raise a mound of stone, 2 ft. base, 1½ ft. high W. of cor.

80.00 On rolling bench land.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. secs. 7, 12, 13 and 18, with brass cap marked.

T21S	
R13W	R12W
S12	S7
S13	S18

1925

Raise a mound of stone, 2 ft. base, 1½ ft. high W. of cor. Land, rolling, with a general easterly exposure and drainage.

INDEPENDENT RESURVEY OF THE SEVIER LAKE GUIDE MERIDIAN  
T. 21 S., BETWEEN RS. 12 and 13W.

Chains

Soil, shallow and deep gravelly sand and clay loam; 3rd  
Undergrowth, scattered sagebrush, shadscale, mountain  
rush and yellow top.

No timber.


Fair grazing.

North, bet. secs. 7 and 12.

Over rolling bench land through scattered undergrowth.

40.00 On rolling bench land.


Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the  
ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.



Raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, W. of cor

80.00 On rolling bench land.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in  
the ground, for cor. secs. 1, 6, 7 and 12, with brass  
cap marked.



Raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high W. of cor.  
Land, rolling, with a general easterly exposure and drain-  
age.

Soil, shallow and deep clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain  
rush and yellow top.

No timber.

Fair grazing.

North, bet. secs. 1 and 6.

Over rolling land through scattered undergrowth.

39.60 Shallow ravine, drains E.

40.00 On rolling land.

INDEPENDENT RESURVEY SEVIER LAKE GUIDE MERIDIAN THROUGH T. 21 S., BETWEEN RS. 12 and 13 W.

Chains

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1 sec. cor., with brass cap marked.

1  
S1 | S6  
1925

58.15 Raise a mound of stone, 2 ft. base, 1 1/2 ft. high W. of cor. closing The standard cor. T. 20 S., R. 13 W. and T. 21 S., R. 13W., heretofore described.

68.59 Intersect the 4th standard parallel south, at the S. bdy. sec. 31, T. 20 S., R. 12 W., S. 89°56' E., 1.01 chs. dist. from the old original closing cor. T. 21 S., Rs. 12 and 13 W., and S. 89°56' E., 7.93 chs. dist. from the old standard cor. T. 20 S., R. 12 and 13 W.

At point of intersection:

Set an iron post, 3 ft. long, 3 ins. diam., 27 ins. in the ground, for closing cor. T. 21 S., R. 12W. and T. 20 S., R. 13W., with brass cap marked.

T20S R12W  
S31  
-----  
T20S | T21S  
R13W | R12W  
S36 | S6  
CC  
1925

Raise a mound of stone, 2 ft. base, 1 1/2 ft. high S. of cor. at base of post, deposit the original closing cor., which is a blue limestone, 26 x 10 x 10 ins., firmly set and properly marked

Alongside the original standard cor., which is a blue limestone, 16 x 10 x 10 ins. above ground, marked SC on N. face and 6 grooves on N., E. and W. faces :

Set an iron post, 3 ft. long, 3 ins. diam., 27 ins. in the ground, for standard cor. T. 20 S., R. 12W. only., with brass cap marked.

T20S | SC  
R13W | T20S  
S36 | R12W  
S31

1925

Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, NE. of cor.

INDEPENDENT RESURVEY SEVIER LAKE GUIDE MERIDIAN TRO  
T. 21 S., BETWEEN R.s E3 and 13 W.13

Chains

Land, rolling, with a general easterly exposure and drainage.

Soil, shallow and deep gravelly clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

INDEPENDENT RESURVEY OF WEST BOUNDARY T. 21 S., R. 13 W.

From the cor. Ts. 21 and 22 S., Rs. 13 and 14 W., which is an iron post, 3 ins. diam., with brass cap, set, marked and witnessed as described in the finished notes of the survey T. 22 S., R. 14 W.

North, on resurvey line along the W. bdy. of the township bet. secs. 31 and 36.

Over rolling bench land through scattered undergrowth.

40.00 At base of knoll, bears NE. and SW.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for a sec. cor., with brass cap marked.

	¼	
S36		S31
	1925	

Raise a mound of stone, 2 ft. base, 1½ ft. high W. of cor.

46.80 Top of elongated knoll, 120 ft. high, bears NE. and SW.

51.90 Base of knoll, bears E. and NW.

80.00 On rolling land.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. secs. 25, 30, 31 and 36, with brass cap marked.

T21S	
R14W	R13W
S25	S30
S36	S31
1925	

Deposit a limestone, 7 x 5 x 3 ins., at base of post,

INDEPENDENT RESURVEY WEST BOUNDARY T. 21 S., R. 13 W.

Chains

marked with a cross (X).

No other suitable accessories available and soil too loose for pits.

Land, rolling, with a general westerly exposure and drainage.

Soil, deep and shallow rocky clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber,

Fair grazing.


North, bet. secs. 25 and 30.

Over rolling bench land through scattered undergrowth.

17.50 Wash, 40 lks. wide, 2 ft. deep, drains W.

40.00 On rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/4 sec. cor., with brass cap marked.




Deposit a limestone, 6 x 4 x 2 ins., at base of post, marked with a cross (X).

No other suitable accessories available and soil too loose for pits.

80.00 On rolling bench land.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. secs. 19, 24, 25 and 30, with brass cap marked.



Raise a mound of stone, 2 ft. base, 1 1/2 ft. high W. of cor.

Land, rolling, with a general westerly exposure and drainage.

Soil, shallow and deep clay and sand loam; 3rd rate.

INDEPENDENT RESURVEY WEST BOUNDARY T. 21 S., R. 13 W.

Chains

Undergrowth, scattered sagebrush, shadscale, mountain  
rush and yellow top.

No timber.


Fair grazing.

North, bet. secs. 19 and 24.

Over level land through scattered undergrowth.

40.00 On level land.


Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the  
ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.



Dig pits, 18 x 18 x 12 ins., N. and S. of post, 3 ft. dist.  
Also, deposit a limestone, 7 x 4 x 2 ins., at base of post  
marked with a cross (X).

80.00 On level land.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in  
the ground, for cor. secs. 13, 18, 19 and 24, with brass  
cap marked.



Raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high W. of cor.  
land, level and rolling, with a general westerly exposure  
and drainage.

Soil, deep clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain  
rush and yellow top.

No timber.

Fair grazing.

North, bet. secs. 13 and 18.


Over rolling and level land through scattered undergrowth.

40.00 On rolling land.

INDEPENDENT RESURVEY WEST BOUNDARY T. 21 S., R. 13 W.

Chains

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.




Dig pits, 18 x 18 x 12 ins., N. and S. of post, 3 ft. dist. Also, deposit a limestone, 7 x 4 x 2 ins., at base of post, marked with a cross (X).

74.50 Road, bears E. and W.

80.00 On rolling land.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. secs. 7, 12, 13 and 18, with brass cap marked.



1925

Raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high W. of cor. land, rolling and level with a general westerly exposure and drainage.

Soil, deep clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.


Fair grazing.

North, bet. secs. 7 and 12.

Over rolling land through scattered undergrowth.

40.00 On rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.



Raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high W. of cor.

80.00 On rolling land.



INDEPENDENT RESURVEY WEST BOUNDARY T. 21 S., R. 13 W.

Chains

Land, rolling, with a general westerly exposure and drainage.

Soil, shallow and deep clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

SUBDIVISION T. 21 S., R. 13 W.

From the cor. secs. 1, 2, 35 and 36, on the S. bdy. of the township, which is an iron post, 2 ins. diam., with brass cap, set, marked and witnessed as described in the official records of the survey T. 22 S., R. 13 W.


N. 0°01' W., bet. secs. 35 and 36.

Over rolling bench land through scattered undergrowth.

9.80 Wash, 40 lks. wide, 2 ft. deep, drains N. 70° E.

40.00 On rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground to solid rock and 18 ins. in a mound of stone, for  $\frac{1}{4}$  sec. cor., with brass cap marked.




Deposit a lava stone, 6 x 4 x 2 ins., at base of post, marked with a cross (X).

72.50 Wash, 30 lks. wide, 2 ft. deep, course E.

80.00 On rolling land.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. secs. 25, 26, 35 and 36, with brass cap marked.



Raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$  ft. high, W. of cor.

SUBDIVISION T, 21<sup>st</sup> S., R. 15<sup>th</sup> W., T. 11<sup>th</sup> N.

Chains

Land, rolling, with a general easterly exposure and drainage.

Soil, shallow and deep clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

S. 89°48' E., on random line bet. secs. 25 and 36.

40.00 Set temp. ¼ sec. cor.

40.04 Intersect the E. bdy. of the township, 3 lks. S. of the cor. secs. 25, 30, 31 and 36.

thence,

N. 89°49' W., on true line bet. secs. 25 and 36.

Over rolling land through scattered undergrowth.

40.00 On rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for ¼ sec. cor., with brass cap marked.

S25
¼
—
S36
1925

Raise a mound of stone, 2 ft. base, 1½ ft. high N. of cor.

80.04 the cor. secs. 25, 26, 35 and 36.

Land, rolling, with a general easterly exposure and drainage.

Soil, deep clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

N. 0°01' W., bet. secs. 25 and 26.

Over rolling land through scattered undergrowth.


24.80 Wash, 20 lks. wide, 2 ft. deep, course E.

40.00 On rolling land.

SUBDIVISION T. 21 S., R. 13 W.

Chains

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.




Deposit a limestone, 5 x 3 x 2 ins., at base of post, marked with a cross (X).

No other suitable accessories available and soil too loose for pits.

80.00 On rolling land.

Set an iron post, 3 ft. long, 2 ins. diam., 20 ins. in the ground to solid rock and 10 ins. in a mound of stone for cor. secs. 23, 24, 25 and 26, with brass cap marked.



Deposit a limestone, 6 x 4 x 2 ins., at base of post, marked with a cross (X).

Land, rolling, with a general easterly exposure and drainage.

Soil, shallow and deep clay and sand loam; 1rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

S. 89°49' E., on random line bet. secs. 24 and 25.

40.00 Set temp. sec. cor.

80.04 Intersect the E. bdy. of the township, 3 lks. N. of the cor. secs. 19, 24, 25 and 30.

Thence,

N. 89°48' W., on true line bet. secs. 24 and 25.

Over rolling land through scattered undergrowth.

40.02 On rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the

## SUBDIVISION, T. 21 S., R. 13 W.

Chains

ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.
$$\begin{array}{c} \frac{1}{4} \\ \hline \text{S24} \\ \hline \text{S25} \\ 1925 \end{array}$$

80.04 Raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high N. of cor. The cor. secs. 23, 24, 25 and 26.

Land, rolling, with a general easterly exposure and drainage.

Soil, deep clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

N.  $0^{\circ}01'$  W., bet. secs. 23 and 24.

Over rolling land through scattered undergrowth.

40.00 On rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

$$\begin{array}{c} \frac{1}{4} \\ \hline \text{S23} \quad \text{S24} \\ \hline 1925 \end{array}$$

40.30 Raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high W. of cor. Wash, 30 lks. wide, 2 ft. deep, course E.

80.00 On rolling land.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. secs. 13, 14, 23 and 24, with brass cap marked.

$$\begin{array}{c|c} \text{T21S} & \text{R13W} \\ \hline \text{S14} & \text{S13} \\ \hline \text{S23} & \text{S24} \\ \hline 1925 \end{array}$$

Raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high W. of cor. Land, rolling, with a general easterly exposure and drainage.

Soil, deep clay and sand loam; 3rd rate.

... 51 SURVEY VISION T. 21 S., R. 13 W.

Chains

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

S. 89°48' E., on random line bet. secs. 13 and 24.

40.00 Set temp. 1/4 sec. cor.

80.10 Intersect the E. bdy. of the township, 5 lks. S. of the cor. secs. 13, 18, 19 and 24.


Thence,

N. 89°50' W., on true line bet. secs. 13 and 24.

Over rolling land through scattered undergrowth

40.05 On rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/4 sec. cor., with brass cap marked.



Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor.

80.10 The cor. secs. 13, 14, 23 and 24,

Land, rolling, with a general easterly exposure and drainage.

Soil, deep clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.


N. 0°01' W., bet. secs. 13 and 14.

Over rolling land through scattered undergrowth.

6.30 Wash, 20 lks. wide, 3 ft. deep, course E.

40.00 On rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/4 sec. cor., with brass cap marked.



SUBDIVISION TOWNSHIP 13 N. 13 W.

Chains

80.00 Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor. sec. 11, 12, 13 and 14.  
 On rolling land.  
 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in ground, for cor. secs. 11, 12, 13 and 14, with brass cap marked

T213	R13W
S11	S12
S14	S13

1925

Raise a mound of stone, 2 ft. base, 1 1/2 ft. high W of cor. sec. 11, 12, 13 and 14.  
 Land, rolling, with a general easterly exposure and drainage.

Soil, deep clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

40.00 S. 89°50' E., on random line bet. secs. 12 and 13.  
 Set temp. 1/4 sec. cor.

40.02 Intersect the E. bdy. of the township, 5 lks. N. of the cor. secs. 7, 12, 13 and 18.

thence,

N. 89°48' W., on true line bet. secs. 12 and 13.

Over rolling land through scattered undergrowth.

40.01 On rolling land.  
 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/4 sec. cor., with brass cap marked.

S12
1/4
S13

1925

80.02 Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor. sec. 11, 12, 13 and 14.  
 Land, rolling, with a general easterly exposure and drainage.

Soil, deep clay and sand loam; 3rd rate.

SUBDIVISION T. 21 S., R. 13 W.

Chains

Undergrowth, scattered sagebrush, shadscale, mountain  
rush and yellow top.

No timber.


Fair grazing.

N. 0°01' W., bet. secs. 11 and 12.

Over rolling land through scattered undergrowth.

40.00 On rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the  
ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.




Raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$  ft. high W. of cor.

48.00 Base of gradual ascent over S. slope of spur, bears NE.  
and W.

80.00 On gradual S. slope of spur, 110 ft. above base.

Set an iron post, 3 ft. long, 2 ins. diam., 12 ins. in  
the ground to solid rock and 18 ins. in a mound of stone  
for cor. secs. 1, 2, 11 and 12, with brass cap marked



Deposit a limestone, 6 x 6 x 4 ins., at base of post,  
marked with a cross (X).

Land, rolling, with a general southeasterly exposure and  
drainage.

Soil, shallow and deep clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain  
rush and yellow top.

No timber.

Fair grazing.

## SUBDIVISION T. 21 S., R. 13 W.

Chains

S. 89°48' E., on random line bet. secs. 1 and 12.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.80.02 Intersect the E. bdy. of the township, 3 lks. N. of the  
cor. secs. 1, 6, 7 and 12.

Thence,

N. 89°47' W., on true line bet. secs. 1 and 12.

Over rolling land through scattered undergrowth.

40.01 On rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the  
ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.
$$\begin{array}{r} S1 \\ \hline \frac{1}{4} \\ S12 \\ 1925 \end{array}$$
Raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high N. of cor.59.00 Base of gradual ascent over rolling E. slope of spur,  
bears N. and S.

80.02 The cor. secs. 1, 2, 11 and 12, 260 ft. above base.

Land, rolling, with a general easterly exposure and  
drainage.

Soil, deep and shallow clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain  
rush and yellow top.

No timber.

Fair grazing.

N. 0°01' W., on true line bet. secs. 1 and 2.

Ascend gradual S. slope of spur through scattered under-  
growth.

13.50 Spur, projects SE.; continue ascent.


39.50 Spur, 130 ft. above sec. cor., projects NE.; descend  
gradual NW. slope.

40.00 On limestone surfacerock, mark a cross (X), over which:


Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in a  
mound of stone, for  $\frac{1}{4}$  sec. cor., with brass cap marked

SUBDIVISION T. 21 S., R. 13 W.

Chains



57.62 On gradual NW. slope, 160 ft. below spur.  
 Intersect the 4th standard parallel S., east, 5.61 chs.  
 dist. from the standard cor. secs. 35 and 36.  
 At point of intersection; on limestone surfacereck, mark  
 cross (X), over which:  
 Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in a  
 mound of stone, for closing cor. secs. 1 and 2, with  
 brass cap marked.




Land, rolling, with a general southeasterly and north-  
 westerly exposure and drainage.  
 Soil, shallow rocky clay and sand loam; 3rd rate.  
 Undergrowth, scattered sagebrush, shadscale, mountain  
 rush and yellow top.  
 No timber.  
 Fair grazing.

From the cor. secs. 2, 3, 34 and 35, on the S. bdy. of the  
 township, which is an iron post, 2 ins. diam., with  
 brass cap, set, marked and witnessed as described in  
 the official records of the survey T. 22 S., R. 13 W.  
 N. 0°01' W., bet. secs. 34 and 35.

Over rolling land through scattered undergrowth.

5.50 Spur, 60 ft. high, projects E.  
 19.00 Base of spur, bears E. and W.  
 40.00 On rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the  
 ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.



SUBDIVISION T. 21 S., R. 13 W.

Chains

52.50 Raise a mound of stone, 2 ft. base, 1½ ft. high W. of Wash, 15 lks. wide, 2 ft. deep, 250 ft. below spur, on E.

80.00 On rolling land. Set an iron post, 3 ft. long, 2 ins. diam., 16 ins. in the ground to solid rock and 14 ins. in a mound of stone, for cor. secs: 26, 27, 34 and 35, with brass cap marked.

T21S	R13W
S27	S26
S34	S35

1925

Deposit a limestone, 8 x 4 x 2 ins., at base of post, marked with a cross (X).

Land, rolling, with a general northeasterly exposure and drainage.

Soil, shallow rocky clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

S. 89°48' E., on random line bet. secs. 26 and 35.

40.00 Set temp. ¼ sec. cor.

80.04 Intersect the N. and S. line, 3 lks. N. of the cor. secs. 25, 26, 35 and 36.

Thence,

N. 89°47' W., on true line bet. secs. 26 and 35.

Over rolling land through scattered undergrowth.

40.02 On rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for ¼ sec. cor., with brass cap marked.

S26
¼
S35

1925

47.00 Raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor. Road, bears N. and S.

SUBDIVISION T. 21 S., R. 13 W.

Chains

80.04 The cor. secs. 26, 27, 34 and 35.

Land, rolling, with a general easterly exposure and drainage.

Soil, deep clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.


N. 0°01' W., bet. secs. 26 and 27.

Over rolling land through scattered undergrowth.

21.30 Wash, 30 lks. wide, 2 ft. deep, course S. 80° E.

40.00 On rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.




Raise a mound of stone, 2 ft. base, 1½ ft. high W. of cor.

45.00 Base of gradual ascent over S. slope of spur, bears E. and W.

73.00 Top of spur, 170 ft. above base, projects W. 60° E.; descend gradual N. slope of spur.

80.00 On gradual N. slope of spur, 40 ft. below top.

Set an iron post, 3 ft. long, 2 ins. diam., 6 ins. in the ground to solid rock and 24 ins. in a mound of stone, for cor. secs. 22, 23, 26 and 27, with brass cap marked



Deposit a limestone, 8 x 6 x 4 ins., at base of post, marked with a cross (E).

Land, rolling, with a general southeasterly exposure and drainage.

Soil, shallow rocky clay and sand loam; 3rd rate.

## SUBDIVISION, T. 21 S., R. 13 W.

Chains

Undergrowth, scattered sagebrush, shadscale, mountain  
rush and yellow top.

No timber.

Fair grazing.

S. 89°47' E., on random line bet. secs. 23 and 26.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

80.02 Intersect the N. and S. line, 3 lks. S. of the cor. secs.  
23, 24, 25 and 26.

Thence,

N. 89°48' W., on true line bet. secs. 23 and 26.

Over rolling land through scattered undergrowth.

40.01 On rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the  
ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

$$\begin{array}{r} S23 \\ \frac{1}{4} \\ \hline S26 \\ 1925 \end{array}$$

Dig pits, 18 x 18 x 12 ins., E. and W. of post, 3 ft. dist.

Also, deposit a limestone, 6 x 4 x 2 ins., at base of post,  
marked with a cross (X).

48.40 Road, bears N. 30° W. and S. 30° E.

65.00 Base of gradual ascent over NE. slope of spur, bears  
NW. and SE.

80.02 The cor: secs: 22, 23, 26 and 27; 80 ft. above base of spur  
Land, rolling, with a general easterly exposure and drain-  
age.

Soil, shallow and deep clay and sandyloam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain  
rush and yellow top.

No timber.

Fair grazing.

SUBDIVISION T. 21 S. R. 13 W.


Chains

N. 0801' W., bet. secs. 22 and 23.

Descend gradual NE. slope of spur through scattered undergrowth.

9.90 Base of spur, 70 ft. below cor., bears N. 80° W. and S. 70° E.


40.00 On rolling land.  
Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.



Raise a mound of stone, 2 ft. base, 1½ ft. high W. of cor.

41.20 Wash, 30 lks. wide, 3 ft. deep, course E.

80.00 On rolling land.  
Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. secs. 14, 15, 22 and 23, with brass cap marked.



Raise a mound of stone, 2 ft. base, 1½ ft. high W. of cor.  
Land, rolling, with a general easterly exposure and drainage.

Soil, deep clay and sand loam; 3rd rate.  
Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.  
No timber.  
Fair grazing.

S. 89°48' E., on random line bet. secs. 14 and 23.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

80.02 Intersect the N. and S. line, 9 lks. N. of the cor. secs. 13, 14, 23 and 24.

Thence,

N. 89°44' W., on true line bet. secs. 14 and 23.

SUBDIVISION T. 21 S., R. 13 W.


Chains

Over rolling land through scattered undergrowth.

18.00 Wash, 20 lks. wide, 2 ft. deep, course N. 80° E.

40.01 On rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked



1925

Raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high, N. of cor.

50.00 Same wash as last, drains S. 80° E.

73.40 Road, bears N. and S.

80.02 The cor. secs. 14, 15, 22 and 23.

Land, rolling, with a general easterly exposure and drainage.

Soil, shallow and deep clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.


N. 0°01' W., bet. secs. 14 and 15.

Over rolling land through scattered undergrowth.

15.50 Wash, 20 lks. wide, 2 ft. deep, course E.

40.00 On rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.



1925

Deposit a limestone, 4 x 3 x 1 ins., at base of post, marked with a cross (X).

No other suitable accessories available and soil too loose for pits.

52.70 Road, bears N. 20° W. and S. 20° E.

59.70 Wash, 10 lks. wide, 3 ft. deep, course SE.

SUBDIVISION T. 21 S., R. 13 W.

Chains	<p>80.00 On rolling land.</p> <p>Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. secs. 10, 11, 14 and 15, with brass cap marked.</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td style="border-right: 1px solid black; padding: 2px;">T21S</td> <td style="padding: 2px;">R13W</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 2px;">S10</td> <td style="padding: 2px;">S11</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 2px;">S15</td> <td style="padding: 2px;">S14</td> </tr> </table> <p style="text-align: center;">1925</p> <p>Raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor. Land, rolling, with a general easterly exposure and drainage.</p> <p>Soil, deep clay and sand loam; 3rd rate.</p> <p>Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.</p> <p>No timber.</p> <p>Fair grazing.</p>	T21S	R13W	S10	S11	S15	S14
T21S	R13W						
S10	S11						
S15	S14						
40.00	<p>S. 89°44' E., on random line bet. secs. 11 and 14.</p> <p>Set temp. ¼ sec. cor.</p>						
80.02	<p>Intersect the N. and S. line, 5 lks. N. of the cor. secs. 11, 12, 13 and 14:</p> <p>Thence,</p> <p>N. 89°42' W., on true line bet. secs. 11 and 14.</p> <p>Over rolling land through scattered undergrowth.</p>						
40.01	<p>On rolling land.</p> <p>Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for ¼ sec. cor., with brass cap marked.</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td style="padding: 2px;">¼</td> <td style="border-top: 1px solid black; padding: 2px;">S11</td> </tr> <tr> <td style="padding: 2px;"></td> <td style="padding: 2px;">S14</td> </tr> </table> <p style="text-align: center;">1925</p> <p>Raise a mound of stone, 2 ft. base, 1½ ft. high N. of cor.</p>	¼	S11		S14		
¼	S11						
	S14						
80.02	<p>The cor. secs. 10, 11, 14 and 15.</p> <p>Land, rolling, with a general easterly exposure and drainage.</p> <p>Soil, deep clay and sand loam; 3rd rate.</p> <p>Undergrowth, scattered sagebrush, shadscale, mountain</p>						


SUBDIVISION 2.32

Chains

N. 0°01' W., bet. secs. 10 and 11. Over rolling land through scattered undergrowth.

40.00 On rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in ground to solid rock and 12 ins. in a mound of stone for 1/4 sec. cor., with brass cap marked.




Deposit a limestone, 6 x 4 x 2 ins., at base of post, marked with a cross (X).

52.50 Road, bears N. 20 E. and S. 20° W.

50.00 On rolling land.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. secs. 2, 3, 10 and 11, with brass cap marked



Raise a mound of stone, 2 ft. base, 1 1/2 ft. high W. of cor. Land, rolling with a general southeasterly exposure and drainage.

Soil, shallow and deep clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

S. 89°42' E., on random line bet. secs. 2 and 11.

40.00 Set temp. 1/4 sec. cor.

60.00 Intersect the N. and S. line, 7 lks. S. of the cor. 1, 2, 11 and 12.

Thence,

N. 69°45' W. on true line bet. secs. 2 and 11.

Over rolling land through scattered undergrowth.

SUBDIVISION T. 21 S., R. 13 W.

Chains

1.80 Spur, 20 ft. above cor., projects SE.; descend gradual SW. slope of spur.

30.00 Base of spur, 70 ft. below top, bears NW. and SE.

40.00 On rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

$\frac{1}{4}$   $\frac{S2}{S11}$   
 1925

Raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$  ft. high N. of cor.

61.70 Road, bears N. 30° E. and S. 20° W.

80.00 The cor. secs. 2, 3, 10 and 11.

Land, rolling, with a general southwesterly exposure and drainage.

Soil, shallow and deep clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

N. 0°01' W., bet. secs. 2 and 3, on true line.

Over rolling land through scattered undergrowth.

30.00 Base of ascent over gradual W. slope of spur, bears E. and W.

40.00 On gradual W. slope of spur.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

$\frac{1}{4}$   
 S3 | S2  
 1925

Raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$  ft. high N. of cor.

57.23 Intersect the 4th standard parallel S., east, 5.51 chs. dist. from the standard cor. secs. 34 and 35.

At point of intersection.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in

SUBDIVISION T. 21 S., R. 13 W.

Chains

the ground, for closing cor. secs. 2 and 3, with brass cap marked.

S C  
T20S R13W  
S35

33 | S2  
T21S | R13W  
C C  
1925

Raise a mound of stone, 2 ft. base, 1½ ft. high, S. of cor. Land, rolling, with a general southerly exposure and drainage.

Soil, shallow and deep clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

From the cor. secs. 3, 4, 33 and 34, on the S. bdy. of the township, which is an iron post, 2 ins. diam., with brass cap, set, marked and witnessed as described in the official records of the survey T. 22 S., R. 13 W. 1. 0°02' W., bet. secs. 33 and 34.

Over rolling bench land through scattered undergrowth.

11.00 Wash, 15 lks. wide, 1 ft. deep, course S. 60° E.

15.00 Base of gradual ascent over SW. slope of spur, bears S. 70° E. and W.

40.00 On gradual SW. slope of spur.

Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground, to solid rock and 20 ins. in a mound of stone, for ¼ sec. cor., with brass cap marked.

¼  
S33 | S34  
1925

Deposit a lava stone, 6 x 6 x 3 ins., at base of post, marked with a cross (X).

48.00 Spur, 140 ft. above sec. cor., projects NW. from main spur which projects NE. from the SE.; thence along broken W. slope of spur.

## SUBDIVISION T. 21 S., R. 13 W.

## Chains

80.00 On broken W. slope.

Set an iron post, 3 ft. long, 2 ins. diam., 12 ins. in the ground to solid rock and 18 ins. in a mound of stone, for cor. secs. 27, 28, 33 and 34, with brass cap marked.

T21S	R13W
S28	S27
S33	S34

1925

Deposit a limestone, 8 x 4 x 2 ins., at base of post, marked with a cross (X).

Land, rolling and broken, with a general westerly exposure and drainage.

Soil, shallow rocky clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

S. 89°48' E., on random line bet. secs. 27 and 34.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

80.14 Intersect the N. and S. line, 3 lks. N. of the cor. secs. 26, 27, 34 and 35.

Thence,

N. 89°47' W., on true line bet. secs. 27 and 34.

Over rolling land through scattered undergrowth.

40.07 On rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

$\frac{1}{4}$	S27
	S34

1925

Raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$  ft. high N. of cor.

52.00 Base of gradual ascent over E. slope of spur, bears N. and S.

68.00 Spur, 220 ft. above base, projects N.; descend gradual W. slope.

SUBDIVISION T. 21 S., R. 13 W.

Chains

20.14 The cor. secs. 27, 28, 33 and 34, 50 ft. below spur.

Land, rolling, with a general easterly and westerly exposure and drainage.

Soil, shallow and deep clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.


Fair grazing.

0°02' W., bet. secs. 27 and 28.

Descend gradually over broken W. slope through scattered undergrowth.

40.00 On broken W. slope.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for sec. cor., with brass cap marked.




Raise a mound of stone, 2 ft. base, 1½ ft. high W. of cor.

50.00 Wash, 15 lks. wide, 2 ft. deep, 100 ft. below sec. cor., course E.

20.00 On broken W. slope, 60 ft. above wash.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. secs. 21, 22, 27 and 28; with brass cap marked.



Raise a mound of stone, 2 ft. base, 1½ ft. high W. of cor. Land, broken and rolling, with a general westerly exposure and drainage.

Soil, shallow rocky clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

## SUBDIVISION T. 21 S., R. 13 W.

Chains

S. 89°47' E., on random line bet. secs. 22 and 27.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

80.20 Intersect the N. and S. line, 7 lks. S. of the cor. secs.  
22, 23, 26 and 27.

Thence,

N. 89°50' W., on true line bet. secs. 22 and 27.

Ascend gradually over broken NE. slope of spur through  
scattered undergrowth.

17.80 Spur, 340 ft. above cor., projects N., 5.00 chs. dist.;  
descend gradually along broken N. slope.

40.05 On broken N. slope, 270 ft. below spur.

Set an iron post, 3 ft. long, 1 in. diam., 14 ins. in the  
ground to solid rock and 16 ins. in a mound of stone,  
for  $\frac{1}{4}$  sec. cor., with brass cap marked.

$$\begin{array}{r} S22 \\ \frac{1}{4} \\ \hline S27 \\ 1925 \end{array}$$

Deposit a limestone, 8 x 8 x 6 ins., at base of post,  
marked with a cross (X):

70.00 Spur, 210 ft. above the  $\frac{1}{4}$  sec. cor., projects N., 5.00  
chs. dist.; descend abrupt W. slope.

80.10 The cor. secs. 21, 22, 27 and 28, 110 ft. below spur.

Land, broken, with a general westerly exposure and  
drainage.

Soil, shallow rocky clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain  
rush and yellow top.

No timber.

Fair grazing.

N. 0°02' W., bet. secs. 21 and 22.

Along broken W. slope of spur through scattered undergrowth.

32.40 Wash, 30 lks. wide, 1 ft. deep, course E.

40.00 On broken W. slope.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the  
ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

## SUBDIVISION T. 21 S., R. 13 W.

Chains

$$\frac{1}{4}$$

S21	S22
-----	-----

1925

80.00 Raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high W. of cor. on broken W. slope.

Set an iron post, 3 ft. long, 2 ins. diam., 18 ins. in the ground to solid rock and 12 ins. in a mound of stone, for cor. secs. 15, 16, 21 and 22, with brass cap marked.

T21S	R13W
S16	S15
S21	S22

1925

Deposit a limestone, 1 x 8 x 4 ins., at base of post, marked with a cross (X).

Land, broken and rolling, with a general easterly exposure and drainage.

Soil, shallow rocky clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

40.00 S.  $89^{\circ}50'$  E., on random line bet. secs. 15 and 22.

Set temp.  $\frac{1}{4}$  sec. cor.

80.16 Intersect the cor. secs. 14, 15, 22 and 23.

Thence,

N.  $89^{\circ}50'$  W., on true line bet. secs. 15 and 22.

Over rolling land through scattered undergrowth.

40.08 On rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

$\frac{1}{4}$	S15
	S22

1925

47.00 Dig pits, 18 x 18 x 12 ins., E. and W. of post, 3 ft. dist. Base of abrupt ascent over E. slope of spur, bears N. and

SUBDIVISION T. 21 S., R. 13 W.

Chains

61.00 Top of spur, 220 ft. above sec. cor., projects S. 10° E.  
descend abrupt W. slope.

76.00 Ravine, 140 ft. below spur, drains SE.

80.16 The cor. secs. 15, 16, 21 and 22, 10 ft. above ravine.  
Land, broken and rolling, with a general easterly and  
westerly exposure and drainage.

Soil, shallow rocky clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain  
rush and yellow top.

No timber.

Fair grazing.

N. 0°02' W., bet. secs. 15 and 16.


Over broken W. slope through scattered undergrowth.

5.00 Ravine, 10 ft. deep, drains SE.

15.00 Spur, 40 ft. high, projects W.

40.00 On rolling W. slope.


Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the  
ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.



54.40 Wash, 20 lks. wide, 1 ft. deep, course E.

80.00 On gradual NW. slope.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in  
the ground, for cor. secs. 9, 10, 15 and 16, with  
brass cap marked.



Raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.  
Land, rolling and broken, with a general westerly exposure  
and drainage.

Soil, shallow and deep clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain

SUBDIVISION T. 21 S., R. 13 W.

Chains

No timber.

Fair grazing.

S. 89°50' E., on random line bet. secs. 10 and 15.

42.00 Set temp. ¼ sec. cor.

80.20 Intersect the N. and S. line, 3 lks. S. of the cor. secs. 10, 11, 14 and 15.

Thence,

N. 89°51' W., on true line bet. secs. 10 and 15.

Over rolling land through scattered undergrowth.

0.00 Road, bears N. and S.

40.10 On rolling land.

Set an iron post, 3 ft. long, 1 in. diam.; 27 ins. in the ground, for ¼ sec. cor., with brass cap marked

S10
¼
S15
1925

Raise a mound of stone, 2 ft. base, 1½ ft. high N. of cor.

46.50 Wash, 40 lks. wide, 2 ft. deep, course SE.

80.20 The cor. secs. 9, 10, 15 and 16.

Land, rolling, with a general southeasterly exposure and drainage.

Soil, deep clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain.

rush and yellow top.

No timber.

Fair grazing.

N. 0°02' W., bet. secs. 9 and 10.

Over rolling land through scattered undergrowth.

5.30 Wash, 30 lks. wide, 2 ft. deep, course E.


26.00 Road, bears N. 20° E. and S. 20° W.

40.00 On gradual E. slope.

Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground to solid rock and 10 ins. in a mound of stone, for ¼ sec. cor., with brass cap marked.

SUBDIVISION T. 21 S., R. 13 W.

Chains




Deposit a lava stone, 6 x 6 x 4 ins., at base of post, marked with a cross (X).

43.30 The E. point of low spur.

80.00 On rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for cor. secs. 3, 4, 9 and 10, with brass cap marked.



Raise a mound of stone, 2 ft. base, 1½ ft. high N. of cor. land, rolling, with a general easterly exposure and drainage. Soil, shallow and deep clay and sand loam; 3rd rate. Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top. No timber. Fair grazing.

S. 89°51' E., on random line bet. secs. 3 and 10.

40.00 Set temp. ¼ sec. cor.

80.20 Intersect the N. and S. line, 14 lks. N. of the cor. secs. 2, 3, 10 and 11.


Thence,

N. 89°45' W., on true line bet. secs. 3 and 10.

Over rolling land through scattered undergrowth.

40.10 On rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for ¼ sec. cor., with brass cap marked.



Raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.

73.30 Road, bears N. and S.

SUBDIVISION T. 21 S., R. 13 W.

Chains

79.70 Road, bears N. 30° W. and S. 30° E.

80.20 The cor. secs. 3, 4, 9 and 10.

Land, rolling, with a general northwesterly exposure and drainage.

Soil, deep clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

N. 0°02' W., bet. secs. 3 and 4 on true line.

Over rolling land through scattered undergrowth.

.80 Road, bears N. 30° W. and S. 30° E.

29.00 Wash, 30 lks. wide, 2 ft. deep, course S. 80° E.

40.00 On rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/4 sec. cor., with brass cap marked.

$\frac{1}{4}$   
 S4 | S3  
 1925

Raise a mound of stone, 2 ft. base, 1½ ft. high W. of cor.

56.90 Intersect the 4th standard parallel S., East, 5.23 chs. dist. from the standard cor. secs. 33 and 34.

At point of intersection:

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for closing cor. secs. 3 and 4, with brass cap marked.

S C  
 T20S R13W  
 S34  
 S4 | S3  
 T21S R13W  
 C C  
 1925

Raise a mound of stone, 2 ft. base, 1½ ft. high, S. of cor.

Land, rolling, with a general westerly exposure and drainage.

Soil, deep clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber. Fair grazing.

Chains

From the cor. secs. 4, 5, 32 and 33, on the S. bdy. of the township, which is an iron post, 3 ft. long, 2 ins. diam., with brass cap, set, marked and witnessed as described in the finished notes of the survey T. 22 S., R. 13 W.

N. 0°03' W., bet. secs. 32 and 33.


Ascend gradually over broken S. slope of spur through scattered undergrowth.

13.20 Base of abrupt ascent over S. slope of spur, bears NE. and W.

26.00 Top of rocky spur, 340 ft. above cor., projects N. 70° E.; descend abrupt N. slope.

40.00 On broken N. slope of spur.

Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground to solid rock and 20 ins. in a mound of stone, for 2 sec. cor., with brass cap marked.




Deposit a limestone, 10 x 10 x 2 ins., at base of post, marked with a cross (X).

41.70 Ravine, 200 ft. below spur, drains S: 60° E., heads about 10.00 chs. SW.; ascend abrupt S. slope of spur.

55.00 Rocky spur, 240 ft. above ravine, projects N. 70° E.; descend abrupt N. slope of spur.

80.00 In bottom of ravine, 220 ft. below spur, drains NE.

Set an iron post, 3 ft. long, 2 ins. diam., 18 ins. in the ground, to solid rock and 12 ins. in a mound of stone, for cor. secs. 28, 29, 32 and 33, with brass cap marked.



Deposit a limestone, 6 x 5 x 4 ins., at base of post, marked with a cross (X).

SUBDIVISION T., 21 S., R. 13 W.

Chains

Land, broken, with a general easterly exposure and drainage.

Soil, shallow rocky clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

S. 89°48' E., on random line bet. secs. 28 and 33.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

79.84 Intersect the N. and S. line, 3 lks. S. of the cor. secs. 27, 28, 33 and 34.

Thence,

S. 89°49' W., on true line bet. secs. 28 and 33.

Descend gradual W. slope of rolling land through scattered undergrowth.

15.00 Base of spur, bears N. and S.; thence across rolling valley.

32.10 Road, bears N. and S., 40 ft. below cor.

35.60 Base of gradual ascent over E. slope of spur, bears N. and S.

39.92 On gradual E. slope.

Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground to solid rock and 18 ins. in a mound of stone, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

S28

$\frac{1}{4}$  S33

1925

Deposit a limestone, 8 x 8 x 4 ins., at base of post, marked with a cross (X).

58.60 Rocky spur, 360 ft. above road, projects NE.; descend abrupt NW. slope.

79.84 The cor. secs. 28, 29, 32 and 33, 180 ft. below spur.

Land, rolling and broken with a general northeasterly exposure and drainage.

Soil, shallow rocky clay and sand loam; 3rd rate.

SUBDIVISION T. 21 S., R. 13 W.

Chains

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber

Fair grazing.

N. 0°03' W., bet. secs. 28 and 29.

Ascend gradually over broken SE. slope of spur through scattered undergrowth.


15.60 Rocky spur, 60 ft. above cor., projects E.; descend gradual N. slope of spur.

19.00 Ravine, 30 ft. below spur, drains N. 70° E.; ascend abrupt S. slope of spur.

38.00 Spur, 220 ft. above ravine, projects E.; descend abrupt N. slope of spur.

40.00 On broken N. slope of spur.

Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground to solid rock and 18 ins. in a mound of stone, for a sec. cor., with brass cap marked.




Deposit a limestone, 12 x 8 x 4 ins., at base of post, marked with a cross (X).

65.60 Ravine, 200 ft. below spur, drains E.; ascend abrupt S. slope.

80.00 On abrupt SW. slope, 160 ft. above ravine.

Set an iron post, 3 ft. long, 2 ins. diam., 15 ins. in the ground to solid rock and 15 ins. in a mound of stone, for cor. secs. 20, 21, 28 and 29, with brass cap marked



Deposit a limestone, 15 x 5 x 3 ins., at base of post, marked with a cross (X).

Land, broken, with a general easterly exposure and drainage.

C. ains

Soil, shallow rocky clay and sand loam; 3rd rate.  
 Undergrowth, scattered sagebrush, shadscale, mountain  
 rush and yellow top.  
 No timber.  
 Fair grazing.

S. 89°49' E., on random line bet. secs. 21 and 28.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.  
 79.94 Intersect the N. and S. line, 5 lks. N. of the cor. secs.  
 21, 22, 27 and 28.

Thence,

S. 89°47' W., on true line bet. secs. 21 and 28.

Over rolling land through scattered undergrowth.

19.00 Road, bears N. and S.  
 20.00 Base of abrupt ascent over E. point of spur, bears NE and S  
 39.97 On top of spur, projects E. from the W., 360 ft. above  
 the sec. cor.  
 Set an iron post, 3 ft. long, 1 in. diam., 8 ins. in the  
 ground to solid rock and 22 ins. in a mound of stone,  
 for  $\frac{1}{4}$  sec. cor., with brass cap marked.

S21  
 $\frac{1}{4}$  —————  
 S28  
 1925

Deposit a limestone, 8 x 5 x 2 ins., at base of post,  
 marked with a cross (X)

64.00 Leave top of spur, projects E. from S. 70° W.  
 79.10 Recross top of spur, projects SE. from the NW.  
 79.94 The cor. secs. 20, 21, 28 and 29, 190 ft. below the  $\frac{1}{4}$   
 sec. cor.

Land, broken, with a general easterly exposure and  
 drainage.

Soil, shallow rocky clay an, sand loam; 3rd rate.  
 Undergrowth, scattered sagebrush, shadscale, mountain  
 rush and yellow top.  
 No timber.  
 Fair grazing.

SUBDIVISION T. 21 S., R. 13 W.

Chains

N. 0°03' W., bet. secs. 20 and 21.

Ascend abrupt S. slope of spur through scattered undergrowth.


4.00 Top of spur, 50 ft. above sec. cor., projects E.; descend abrupt N. slope.

8.70 Ravine, 230 ft. below spur, drains E.; ascend abrupt S. slope.

30.30 Spur, 220 ft. above ravine, projects E.; descend abrupt N. slope.

40.00 On abrupt N. slope.

Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground to solid rock and 20 ins. in a mound of stone, for  $\frac{1}{4}$  sec. cor., with brass cap marked.




Deposit a limestone, 6 x 4 x 3 ins., at base of post, marked with a cross (X).

49.90 Draw, 270 ft. below spur, course E.; ascend abrupt S. slope.

76.00 Spur, 280 ft. above draw, projects S. 20° E., 5.00 chs. dist.; descend abrupt NE. slope.

80.00 On abrupt E. slope of spur, 30 ft. below top.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. secs. 16, 17, 20 and 21, with brass cap marked.



Raise a mound of stone, 2 ft. base, 1 ft. high, W. of cor.

Land, broken, with a general easterly exposure and drainage.

Soil, shallow rocky clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber. Fair grazing.

SUBDIVISION T. 21 S., R. 13 W.

Chains

S. 89°47' E., on random line bet. secs. 16 and 21.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

79.96 Intersect the N. and S. line, 3 lks. N. of the cor. secs. 15, 16, 21 and 22.

Thence,

N. 89°46' W., on true line bet. secs. 16 and 21.

Over rolling land through scattered undergrowth.

16.70 Road, bears N. and S.; ascend gradual E. slope.

39.98 On top of spur, 40 ft. above road, projects S. 70° E.

Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground to solid rock and 20 ins. in a mound of stone, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

$$\begin{array}{r} S16. \\ \frac{1}{4} \\ \hline S21 \\ 1925 \end{array}$$

Deposit a limestone, 10 x 8 x 2 ins., at base of post, marked with a cross (X).

Continue gradual ascent.

79.96 The cor. secs. 16, 17, 20 and 21, 300 ft. above the  $\frac{1}{4}$  sec. cor.

Land, rolling, with a general easterly exposure and drainage.

Soil, shallow rocky clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

N. 0°03' W., bet. secs. 16 and 17.

Ascend gradually along broken E. slope through scattered undergrowth.


15.00 Spur, 20 ft. above cor., projects N. 70° E.; descend abrupt N. slope.

29.00 Draw, 180 ft. below spur, drains N. 80° E.; ascend abrupt S. slope.

SUBDIVISION T. 21 S., R. 13 W.

Chains

40.00 On abrupt S. slope of spur.  
Set an iron post, 3 ft. long, 1 in. diam., 6 ins. in the ground to solid rock and 24 ins. in a mound of stone, for  $\frac{1}{4}$  sec. cor., with brass cap marked.




Deposit a limestone, 7 x 5 x 4 ins., at base of post, marked with a cross (X).

42.00 Rocky spur, 210 ft. above draw, projects SE.; descend abrupt NE. slope.

70.00 Base of spur, bears N. 60° W. and S. 60° E.

80.00 On rolling land, 210 ft. below spur.  
Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. secs. 8, 9, 16 and 17, with brass cap marked.



Land, rolling and broken, with a general easterly exposure and drainage.

Soil, shallow rocky clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

S. 89°46' E., on random line bet. secs. 9 and 16.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

79.90 Intersect the N. and S. line, 7 lks. S. of the cor. secs. 9, 10, 15 and 16.

Thence,

N. 89°49' W., on true line bet. secs. 9 and 16.

Over rolling bench land through scattered undergrowth.

10.85 Road, bears N. 20° E. and S. 20° W.

SUBDIVISION T. 21 S., R. 13 W.

Chains

39.95 On rolling bench land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

$\frac{1}{4}$ 

S9
—
S16

  
 1925

Deposit a limestone, 6 x 3 x 2 ins., at base of post, marked with a cross (X).

No other suitable accessories available and soil too loose for pits.

56.90 Road, bears NW. and SE.

79.90 The cor. secs. 8, 9, 16 and 17.

Land, rolling, with a general easterly exposure and drainage.

Soil, deep clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

N. 0°03' W., bet. secs. 8 and 9.

Over rolling land through scattered undergrowth.

6.20 Wash, 15 lks. wide, 1 ft. deep, course NE.

20.00 Wash, 30 lks. wide, 2 ft. deep, course E.

22.50 Road, bears N. 75° W. and S. 75° E.

40.00 On rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

$\frac{1}{4}$ 

S8		S9
	—	

  
 1925

Raise a mound of stone, 2 ft. base,  $1\frac{1}{2}$  ft. high W. of cor.

50.00 Base of abrupt ascent over S. slope of spur, bears E. and

61.30 Rocky spur, 170 ft. above base, projects W.; descend abrupt N. slope.

SUBDIVISION T. 21 S., R. 13 W.

Chains

73.00 Ravine, 80 ft. below spur, drains W.; ascend abrupt S. slope.

80.00 On abrupt S. slope, 30 ft. above ravine.

Set an iron post, 3 ft. long, 2 ins. diam., 8 ins. in the ground to solid rock and 22 ins. in a mound of stone, for cor. secs. 4, 5, 8 and 9; with brass cap marked.

T21S	R13W
S5	S4
S8	S9

1925

Deposit a lava stone, 10 x 8 x 4 ins., at base of post, marked with a cross (X).

Land, rolling, with a general easterly exposure and drainage.

Soil, deep and shallow clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

S. 89°49' E., on random line bet. secs. 4 and 9.

40.00 Set temp. 4 sec. cor.

79.90 Intersect the N. and S. line, 9 lks. S. of the cor. secs. 3, 4, 9 and 10.

Thence,

N. 89°53' W., on true line bet. secs. 4 and 9.

Over rolling land through scattered undergrowth.

20.00 Base of gradual ascent over SW. slope of spur, bears N. and SW.

39.95 On rocky S. slope of spur.

Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground to solid rock and 12 ins. in a mound of stone, for 4 sec. cor., with brass cap marked.

S4
4
S9

1925

SUBDIVISION T. 21 S., R. 13 W.

Chains

Deposit a quartzite, 12 x 6 x 4 ins., at base of post, marked with a cross (X).

50.00 Spur, 280 ft. above sec. cor., projects S. 60° W.; descend gradually along NW. slope of spur,

74.00 Ravine, 150 ft. below spur, drains S. 60° W., heads 4.00 chs. to the NE.; ascend gradual SE. slope.

79.90 The cor. secs. 4, 5, 8 and 9, 60 ft. above ravine. Land, rolling and broken, with a general southeasterly and southwesterly exposure and drainage. Soil, shallow and deep clay and sand loam; 3rd rate. Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top. No timber. Fair grazing.

---

N. 0°03' W., bet. secs. 4 and 5 on true line. Ascend gradual S. slope of spur through scattered undergrowth.

15.40 Spur, 40 ft. above cor., projects E.; descend gradual N. slope.

25.00 Base of spur, bears E. and W.

36.00 Ravine, 160 ft. below spur, drains E.; ascend gradual S. slope.

40.00 On gradual S. slope. Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

$$\begin{array}{c} \frac{1}{4} \\ \text{S5} \quad | \quad \text{S4} \\ 1925 \end{array}$$

Raise a mound of stone, 2 ft. base, 1½ ft. high W. of cor.

53.00 Spur, 120 ft. above ravine, projects SE.; descend gradual NE. slope.

56.52 Intersect the 4th standard parallel S., East, 5.22 chs. dist. from the standard cor. secs. 32 and 33. At point of intersection, on gradual NE. slope, 40 ft. below spur.

SUBDIVISION T. 21 S., R. 13 W.

Chains

Set an iron post, 3 ft. long, 2 ins. diam., 12 ins. in the ground to solid rock and 18 ins. in a mound of stone, for closing cor. secs. 4 and 5, with brass cap marked.

S C  
T20S R13W  
S33

S5	S4
T21S	R13W
C	C

1925

Deposit a limestone, 6 x 4 x 2 ins., at base of post, marked with a cross (X).

Land, rolling and broken, with a general easterly exposure and drainage.

Soil, shallow and deep clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

From the cor. secs. 5, 6, 31 and 32, on the S. bdy. of the township, which is an iron post, 2 ins. diam., with brass cap, set, marked and witnessed as described in the official records of the survey T. 22 S., R. 13W. N. 0°03' W., bet. secs. 31 and 32.

Ascend gradually along broken E. slope of ridge through scattered undergrowth.

28.70 Ridge, 70 ft. above cor., bears NE. and S. 20° W.; descend gradually along broken NW. slope of ridge.

40.00 On abrupt N. slope of ridge, 260 ft. below top.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

$\frac{1}{4}$   
S31 | S32  
1925

Raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

80.00 On gradual NW. slope, 200 ft. below the  $\frac{1}{4}$  sec. cor.

Chains

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. secs. 29, 30, 31 and 32, with brass cap marked.

T21S	R13W
S30	S29
S31	S32

1925

Raise a mound of stone, 2 ft. base, 1½ ft. high W. of cor. Land, broken; with a general easterly and westerly exposure and drainage.

Soil, shallow rocky clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

S. 89°48' E., on random line bet. secs. 29 and 32.

40.00 Set temp. ¼ sec. cor.

80.08 Intersect the cor. secs. 28, 29, 32 and 33.

Thence,

N. 89°48' W., on true line bet. secs. 29 and 32.

Ascend gradual SE. slope of spur through scattered undergrowth.

14.00 Rocky spur, projects NE.; continue gradual ascent.

37.20 Ridge, 220 ft. above sec. cor., bears N. and S.; descend abrupt W. slope of ridge.

40.04 On abrupt W. slope of surfacerock, mark a cross (X), over which.

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in a mound of stone, for ¼ sec. cor., with brass cap marked

S29
¼
S32

1925

78.20 Wash, 30 lks. wide, 2 ft. deep, course NW.

80.08 The cor. secs. 29, 30, 31 and 32, 350 ft. below ridge. Land, broken and rolling, with a general easterly and

SUBDIVISION T. 21 S., R. 13 W.

Chains

westerly exposure and drainage.

Soil, shallow rocky clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain  
rush and yellow top.

No timber.

Fair grazing.

N. 89°48' W., on random line bet. secs. 30 and 31.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

77.20 Intersect the W. bdy. of the township, S. line of the  
cor. secs. 25, 30, 31 and 36.

Thence,

S. 89°52' E., on true line bet. secs. 30 and 31.

Over level land through scattered undergrowth.

37.20 On level land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the  
ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

$$\begin{array}{r} \frac{1}{4} \frac{S30}{S31} \\ 1925 \end{array}$$

47.20 Raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$  ft. high N. of cor.  
base of rolling hills, bears N. and S.

77.20 The cor. secs. 29, 30, 31 and 32.

Land, level and rolling, with a general westerly exposure  
and drainage.

Soil, deep clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain  
rush and yellow top.

No timber.

Fair grazing.

N. 0°03' W., bet. secs. 29 and 30.

Over rolling land through scattered undergrowth.

2.50 Wash, 30 lks. wide, 2 ft. deep, course W.

40.00 On broken W. slope.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the

Chains

ground, for 1/4 sec. cor., with brass cap marked  
 S30 S29  
 1925

30.00 Raise a mound of stone, 2 ft. base, 1 1/2 ft. high, of  
 On broken W. slope.

Set an iron post, 3 ft. long, 2 ins. diam., 8 ins. in  
 ground to solid rock and 22 ins. in a mound of stone  
 for cor. secs. 19, 20, 29 and 30, with brass cap marked

T21S	R13W
S19	S20
S30	S29

1925

Deposit a limestone, 7 x 7 x 3 ins., at base of post,  
 marked with a cross (X).

Land, rolling and broken, with a general westerly exposure  
 and drainage.

Soil, shallow and deep clay and sand loam; 3rd rate.  
 Undergrowth, scattered sagebrush, shadscale, mountain  
 rush and yellow top.

No timber.

Fair grazing.

3. 89°48' E., on random line bet. secs. 20 and 29.  
 40.00 Set temp. 1/4 sec. cor.

80.06 Intersect the cor. secs. 20, 21, 28 and 29.  
 Thence,

N. 89°48' W., on true line bet. secs. 20 and 29.

Ascend gradually over broken S. slope of spur through  
 scattered undergrowth.

22.20 Spur, 100 ft. above cor., projects N. 70° E.; descend  
 gradual NW. slope of spur.

40.03 On broken NW. slope of spur.

Set an iron post, 3 ft. long, 1 in. diam., 15 ins.  
 ground to solid rock and 15 ins. in a mound of  
 for 1/4 sec. cor., with brass cap marked

SUBDIVISION T. 21 S., R. 13 W.

Chains

S20  
 $\frac{1}{4}$   
 S29

1925

Deposit a limestone, 10 x 8 x 4 ins., at base of post, marked with a cross (X).

48.00 Ravine, 60 ft. below spur, drains N. 70° E., heads 8.00 chs. to the W.; ascend gradual NE. slope.

63.00 Ridge, 150 ft. above ravine, bears N. 20° E. and S. 20° W.; descend abrupt W. slope of ridge.

80.06 The cor. secs. 19, 20, 29 and 30, 210 ft. below ridge. Land, broken, with a general easterly and westerly exposure and drainage.

Soil, shallow rocky clay and sand loam; ard rate.

Undergrowth, scattered bluebrush, whedscale, mountain rush and yellow top.

No timber.

Fair grading.

N. 89° 52' W., on random line bet. secs. 19 and 30.

40.00 Set temp. sec. cor.

77.10 Intersect the S. bdy. of the township, 3 lbs. S. of the cor. secs. 19, 24, 25 and 30.

Thence,

S. 89° 51' E., on true line bet. secs. 19 and 30.

Over level land through scattered undergrowth.

30.00 Base of gradual ascent over broken W. slope of ridge, bears N. and S.

37.10 on W. slope of ridge.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for a sec. cor., with brass cap marked.

S19  
 $\frac{1}{4}$   
 S30

1925

Raise a mound of stone, 2 ft. base, 1½ ft. high N. of cor.

77.10 The cor. secs. 19, 20, 29 and 30, 170 ft. above sec. cor. Land, level and broken, with a general westerly exposure and drainage.

SUBDIVISION T. 21 S. R. 13 W.

Chains


Soil, shallow and deep clay and sand loam; 3rd rate.  
 Undergrowth, scattered sagebrush, shadscale, mountain  
 rush and yellow top.  
 No timber.  
 Fair grazing.

N. 0°03' W., bet. secs. 19 and 20.

Along broken and rolling W. slope of ridge through  
 scattered undergrowth.

40.00 On rolling W. slope.


Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the  
 ground, for sec. cor., with brass cap marked.



Raise a mound of stone, 2 ft. base, 1½ ft. high W. of cor.

80.00 On broken W. slope.

Set an iron post, 3 ft. long, 2 ins. diam., 13 ins. in the  
 ground to solid rock and 17 ins. in a mound of stone,  
 for cor. secs. 17, 18, 19 and 20, with brass cap marked.



1925

Deposit a limestone, 8 x 6 x 4 ins., at base of post,  
 marked with a cross (X).

Land, rolling and broken, with a general westerly exposure  
 and drainage.

Soil, shallow rocky clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale; mountain  
 rush and yellow top.

No timber.

Fair grazing.

Chains

S. 89°48' E., on random line bet. secs. 17 and 20.

40.00 Set temp. & sec. cor.

80.02 Intersect the N. and S. line, 5 lks. N. of the cor. secs, 16, 17, 20 and 21.

Thence,

N, 89°46' W., on true line bet. secs. 17 and 20.

Ascend abrupt NE. slope of spur through scattered undergrowth.

3.40 Spur, 30 ft. above cor., projects S. 20° E.; descend abrupt SW. slope.

20.00 Ravine, 290 ft. below spur, drains SE.; ascend abrupt NE. slope.

40.01 On abrupt NE. slope.

Set an iron post, 3 ft. long, 1 in. diam., 14 ins. in the ground to solid rock and 16 ins. in a mound of stone, for & sec. cor., with brass cap marked.

S17  
+-----+  
S20

1925

Deposit a limestone, 8 x 6 x 4 ins., at base of post, marked with a cross (X).

45.00 Ridge, 110 ft. above ravine, bears N. and S.; descend abrupt W. slope of ridge.

80.02 The cor. secs. 17, 18, 19 and 20, 300 ft. below ridge. Land, broken, with a general easterly and westerly exposure and drainage.

Soil, shallow rocky clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

SUBDIVISION T. 21 S., R. 13 W.

Chains

N. 89°51' W., on random line bet. secs. 18 and 19.

40.00 Met temp. 4 sec. cor.

76.98 Intersect the W. bdy. of the township, 3 lks. N. of the cor. secs. 13, 18, 19 and 24.

Thence,

S. 89°52' E., on true line bet. secs. 18 and 19.

Over level land through scattered undergrowth.

36.98 On level land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 4 sec. cor., with brass cap marked.

S18  
+-----+  
S19

1925

Raise a mound of stone, 3 ft. base, 1 1/2 ft. high, N. of cor.

60.00 Base of gradual ascent over broken W. slope of ridge, bears N. and S.

76.98 The cor. secs. 17, 18, 19 and 20.

Land, level and broken, with a general westerly exposure and drainage.

Soil, deep clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

N. 0°03' W., bet. secs. 17 and 18.

Along broken W. slope of ridge through scattered undergrowth.

40.00 On broken W. slope.

Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground to solid rock and 20 ins. in a mound of stone, for 1/4 sec. cor., with brass cap marked.

+  
S18 | S17

1925

Deposit a limestone, 7 x 5 x 3 ins., at base of post,

30.00 On Nelson W. slope.  
Set an iron post, 3 ft. long, 2 ins. diam., 12 ins. in the ground to solid rock and 18 ins. in a mound of stone, for sec. cor. 7, 8, 17 and 18, with brass cap marked.

T21s	R13W
S7	S8
S18	S17

1925

Deposit a limestone, 8 x 6 x 2 ins., at base of post, marked with a cross (X).

Land, broken, with a general westerly exposure and drainage.

Soil, shallow rocky clay and sand loam, 3rd rate.

Undergrowth, scattered brush, black cherry, mountain rush and yellow top.

No timber.

Fair grazing.

8. 89° 46' E., on random line bet. secs. 8 and 17.

40.00 Set top; sec. cor.

80.10 Intersect the cor. secs. 8, 9, 16 and 17. Thence,

N. 89° 46' W., on true line bet. secs. 8 and 17.

over rolling land through scattered undergrowth.

6.00 ash, 30 lbs. wide, 2 ft. deep, course NE.

12.00 Base of gradual ascent over E. slope of spur, bears N. and SE.

28.60 Top of spur, 200 ft. above sec. cor., projects NE.; descend gradual NW. slope.

40.05 On gradual NW. slope.

Set an iron post, 3 ft. long, 1 in. diam., 6 ins. in the the ground to solid rock and 24 ins. in a mound of stone for sec. cor., with brass cap marked.

88

817

1925

SUBDIVISION T. 21 S., R. 11 E., T. 21 S., R. 11 E., T. 21 S., R. 11 E.

Chains

Deposit a limestone, 10 x 7 x 3 ins. at base of post, marked with a cross (X).

40.80 Ravine, 120 ft. below spur, drains NE., heads 15.00 chs. to the S.

47.40 Ridge, 60 ft. above ravine, bears N. 10° W. and S. 10° E. descend abrupt W. slope of ridge.

80.10 The cor. secs. 7, 8, 17 and 18, 260 ft. below ridge. Land, broken, with a general easterly exposure and drainage. Soil, shallow rocky clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

N. 89°52' W., on random line bet. secs. 7 and 18.

40.00 Set temp.  $\frac{1}{4}$  sec. cor.

76.80 Intersect the W. bdy. of the township, 9 lks. S. of the cor. secs. 7, 12, 13 and 18.

thence,

S. 89°48' E., on true line bet. secs. 7 and 18.

Over level land through scattered undergrowth.

18.00 Road, bears NE. and SW.

31.80 Base of gradual ascent over broken W. slope of ridge, bears N. and S.

36.80 On gradual W. slope.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

89  
 $\frac{1}{4}$   
 S18  
 1925

Raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.

76.80 The cor. secs. 7, 8, 17 and 18.

Land, level and broken, with a general westerly exposure and drainage.

Soil, shallow and deep clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain

SUBDIVISION T. 21 S., R. 13 W.

Chains

0.00 To ~~rusty~~ and yellow top.

No timber.

Fair grazing.

N. 0°03' W., bet. secs. 7 and 8.

Along broken W. slope of ridge through scattered undergrowth.

6.00 Enter scattered timber, bears E. and W.

40.00 On broken W. slope.

Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground to solid rock and 20 ins. in a mound of stone, for a sec. cor., with brass cap marked.

	†	
S7		S8
1925		

From which,

A juniper, 10 ins. diam., bears S. 37°45' E., 300 lks. dist., marked † S8 BT.

A juniper, 10 ins. diam., bears S. 57° W., 110 lks. dist., marked † S7 BT.

45.00 Road, bears NE. and SW.

70.00 Leave timber at base of gradual ascent over S. slope of spur, bears E. and W.

80.00 On top of spur, 120 ft. above base, projects S. 80° W.

Set an iron post, 3 ft. long, 2 ins. diam., 12 ins. in the ground to solid rock and 18 ins. in a mound of stone for cor. secs. 5, 6, 7 and 8, with brass cap marked

T21S		R13W
S6		S5
-----		
S7		S8
1925		

Deposit a limestone, 8 x 6 x 4 ins., at base of post, marked with a cross (X).

Land, broken, with a general westerly exposure and drainage.

Soil, shallow rocky clay and sand loam; 3rd rate.

SUBDIVISION T. 21 S., R. 13 W.

Chains

Timber, scattered juniper and pinon on portion of mile.  
Fair grazing.

S. 89°46' E., on random line bet. secs. 5 and 8.

40.00 Set temp. & sec. cor.

80.10 Intersect the N. and S. line, 7 lks. N. of the cor. secs.  
4, 5, 8 and 9.

Thence,

N. 89°43' W., on true line bet. secs. 5 and 8.

Along broken S. slope of spur through scattered undergrowth

40.05 On broken S. slope of spur.

Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the  
ground to solid rock and 18 ins. a mound of stone, for  
¼ sec. cor., with brass cap marked.

$$\begin{array}{r} S5 \\ \frac{1}{4} \hline S8 \end{array}$$

1925

Deposit a limestone, 5 x 5 x 4 ins., at base of post,  
marked with a cross (X).

58.00 Ridge, 40 ft. above sec. cor., bears N. and S. 20° E.;  
descend abrupt W. slope of ridge.

80.10 The cor. secs. 5, 6, 7 and 8, 230 ft. below ridge.

Land, broken, with a general westerly and southerly  
exposure and drainage.

Soil, shallow rocky clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain  
rush and yellow top.

No timber.

Fair grazing.

N. 89°48' W., on random line bet. secs. 6 and 7.

40.00 Set temp. & sec. cor.

76.70 Intersect the W. bdy. of the township at the cor. secs.  
1, 6, 7 and 12.

Thence,

SUBDIVISION T. 21 S., R. 13 W.

Chains

S. 89°48' E., on true line bet. secs. 6 and 7.

Over rolling land through scattered undergrowth.

20.00 Base of gradual ascent over broken N. slope of spur,  
bears N. and S.

36.70 On broken N. slope of spur.

Set an iron post, 3 ft. long, 1 in. diam., 6 ins. in the ground to solid rock and 24 ins. in a mound of stone, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

S6  
 $\frac{1}{4}$   
 S7  
 1925

Deposit a quartzite, 6 x 5 x 3 ins., at base of post, marked with a cross (+).

71.00 Ascent becomes abrupt, bears NE. and SW.

76.70 The cor. secs. 5, 6, 7 and 8, 220 ft. above sec. cor. on the W. bdy.

Land, broken and rolling, with a general westerly exposure and drainage.

Soil, shallow rocky sand and clay loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

No timber.

Fair grazing.

N. 0°03' W., on true line bet. secs. 5 and 6.

Descend gradually along broken W. slope through scattered undergrowth.

20.00 Ravine, 40 ft. below cor., drains S. 50° W.; heads 10.00 chains to the NE.; ascend gradual S. slope.

40.00 On top of spur, 40 ft. above ravine, projects S. 60° W.

Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground to solid rock and 12 ins. in a mound of stone, for  $\frac{1}{4}$  sec. cor., with brass cap marked.

$\frac{1}{4}$   
 S6 | S5  
 1925

**SUBDIVISION 1. 21 S. 31 E.**

**Chains**

Deposit a limestone, 3 x 3 x 3 ins., at base of post, marked with a cross (X).

53.00 Ravine, 40 ft. below spur, drains SW. 00.00

56.97 Intersect the 4th standard parallel 6., East, 4.82 chs. dist. from the standard cor. secs. 31 and 32. 00.00

At point of intersection

Set an iron post, 3 ft. long, 2 ins. diam., 12 ins. in the ground to solid rock and 18 ins. in a mound of stone, for closing cor. secs. 5 and 6, with brass cap marked.

S C  
T20S R13W  
S32

S6	S5
T21S	R13W
C	C

1925

Deposit a limestone, 10 x 6 x 2 ins., at base of post, marked with a cross (X).

land, broken, with a general southwesterly exposure and drainage.

soil, shallow rocky clay and sand loam; 3rd rate.

Undergrowth, scattered sagebrush, shadscale, mountain rush and yellow top.

no timber.

fair grazing.

**LATITUDES, DEPARTURES AND CLOSING ERRORS.**

Lines designated	True bearings	Dist-ances. Chs.	Latitudes		Departures	
			N. Chs.	S. Chs.	E. Chs.	W. Chs.
4th S. 31 E. R13W	West	477.58	.....	.....	.....	477.58
1st Sdy. T21S R13W	South	455.67	.....	455.67	.....	.....
2nd Sdy. T21S R13W	1.89°48'E	477.29	.....	.....	1.67	477.29
3rd Sdy. T21S R13W	North	458.15	458.15	.....	.....	.....
Convergency	West	.59	.....	.....	.....	.....
			<u>458.15</u>	<u>457.34</u>	<u>477.29</u>	<u>478.17</u>
			<u>457.34</u>			<u>477.29</u>
Errors in latitudes and departures			0.81			0.81

GENERAL DESCRIPTION, T. 21 S., R. 13 W.

The lands within the boundaries of this township, consist of low rolling hills, broken in places by outcroppings of limestone.

The township is drained by numerous small washes and ravines and has a general easterly and westerly exposure and drainage.

The soil consists of a shallow and deep rocky clay and sand loam, and may be classified as 3rd rate.

The only timber found, were a few scattered scrub juniper in secs. 7 and 8, which have no commercial value..

The entire township is covered with a scattered undergrowth of sagebrush, shadscale, mountain rush, yellow top, and native grass, which affords fair grazing for stock during the winter months,

No settlers, improvements, water, or indications of mineral were found on the township.

Most parts of the township are accessible by wagon over unimproved roads found throughout the township.

No portions of the township are suitable for farming.

The township in general is suitable for a winter grazing range for sheep, it being impracticable to graze the township during the summer months on account of there being no water.

Reference

Blank Page

**Blank**

**Page**



CERTIFICATE OF UNITED STATES SURVEYOR.

I, Willis W. Bandy, U. S. Surveyor, hereby certify upon honor that, in pursuance of special instructions received from the U. S. Surveyor General for Utah bearing date of the 19th day of March, 1921, I have well, faithfully, and in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, surveyed all those parts or portions of independent resurvey of the fourth standard parallel south through range 13 west, east boundary or Sevier Lake Guide Meridian; west boundary, and survey of subdivision of T. 21 S., R. 13 W.

of the Salt Lake Base and Meridian, in the State of Utah, which are represented in and date diagram on dates shown on said diagram the foregoing field notes as having been executed by me, and under my direction; and that all the corners of said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the U. S. Surveyor General for Utah and in the specific manner described in the field notes, and that the foregoing are the original field notes of such survey.

Place: Dedrick, 710

Willis W. Bandy  
U. S. Surveyor

Date: May 24, 1927

APPROVAL.

OFFICE OF THE UNITED STATES SURVEYOR GENERAL,

Denver, Colorado JAN 7 - 1927

The foregoing field notes of the ~~survey of~~ independent resurvey of the fourth standard parallel south through range 13 west, east boundary or Sevier Lake Guide Meridian; west boundary, and survey of subdivision of T. 21 S., R. 13 W.

executed by Willis W. Bandy, U.S. Surveyor under his special instructions dated March 19, 1921, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

Wm. H. Patten  
U. S. Surveyor General  
U.S. Supervisor of Surveys.

I certify that the foregoing transcript of the field notes of the above described surveys in \_\_\_\_\_, has been correctly copied from the original notes on file in this office.