
Volume

#

R0506

BOOK A-506

4-679 b

INDEX DIAGRAM.

Township 17 South, Range 10 West
 41 40 38 37 36 35

50	6	101	5	86	4	77	3	68	2	59	1	27 34
	100		99		85		76		67		58	
48	7	99	8	84	9	75	10	66	11	58	12	27 32
	97		97		84		74		66		57	
47	13	96	17	83	16	74	15	65	14	56	13	27 31
	95		94		82		73		64		55	
46	19	93	20	81	21	72	22	63	23	54	24	27 30
	92		91		81		71		63		54	
45	30	90	29	80	28	71	27	62	26	53	25	26 28
	89		88		79		70		61		52	
43	31	87	32	78	33	69	34	60	35	51	36	26 27
	18		18		18		19		19		19	
	25		24		23		22		21		20	1817

Blank

Page

BOOK A-506

4-879b

INDEX DIAGRAM.

Township 15 South, Range 10 West

188	6	192	5	175	4	164	3	154	2	146	1	115 182
	190		189		174		163		153		145	
187	7	188	8	173	9	162	10	152	11	144	12	115 181
	187		186		172		161		152		144	
186	13	185	17	171	16	160	15	151	14	143	12	114 180
	184		183		170		159		150		142	
185	19	182	20	169	21	158	22	149	23	142	24	114 178
	181		180		167		157		149		141	
184	29	179	29	166	28	156	27	148	28	141	26	114 177
	178		177		166		155		147		140	
183	31	176	22	165	23	155	24	146	25	139	26	114 176
	130		129		128		126		125		124	

Blank

Page

BOOK A-506

4-679 b

INDEX DIAGRAM.

Township 18 South, Range 11 West

	<u>239</u>	<u>237</u>	<u>236</u>	<u>235</u>	<u>234</u>	<u>232</u>	
<u>224</u> <u>231</u>	6 <u>288</u>	5 <u>287</u>	4 <u>276</u>	3 <u>266</u>	2 <u>256</u>	1 <u>247</u>	<u>203</u> <u>212</u>
<u>224</u> <u>229</u>	7 <u>286</u>	8 <u>284</u>	9 <u>274</u>	10 <u>265</u>	11 <u>254</u>	12 <u>246</u>	<u>204</u> <u>211</u>
<u>223</u> <u>228</u>	16 <u>284</u>	17 <u>282</u>	18 <u>272</u>	15 <u>263</u>	14 <u>253</u>	13 <u>244</u>	<u>204</u> <u>209</u>
<u>223</u> <u>227</u>	19 <u>281</u>	20 <u>280</u>	21 <u>270</u>	22 <u>261</u>	23 <u>251</u>	24 <u>243</u>	<u>204</u> <u>208</u>
<u>203</u> <u>225</u>	28 <u>279</u>	29 <u>278</u>	28 <u>269</u>	27 <u>259</u>	26 <u>250</u>	25 <u>242</u>	<u>205</u> <u>207</u>
<u>222</u> <u>224</u>	31 <u>277</u>	32 <u>275</u>	33 <u>267</u>	34 <u>256</u>	35 <u>248</u>	36 <u>240</u>	<u>205</u> <u>206</u>
	<u>215</u> <u>221</u>	<u>215</u> <u>220</u>	<u>214</u> <u>219</u>	<u>214</u> <u>217</u>	<u>214</u> <u>216</u>	<u>213</u> <u>215</u>	

Blank

Page

BOOK A-506

4-879 b

INDEX DIAGRAM.

Township 20 South Range 9 West
307 305 304 303 301 300

318	6	370	5	356	4	345	3	335	2	320 326	1
	369		368		355		345		334		
318	7	368	8	354	9	344	10	333	11	320 324	12
	367		366		353		343		333		
317	13	365	14	352	15	342	16	332	17	320 324	18
	364		363		351		341		331		
316	19	362	20	350	21	340	22	330	23	319 323	24
	361		360		349		339		329		
315	25	359	26	348	27	338	28	328	29	319 321	30
	359		358		347		337		327		
314	31	357	32	346	33	336	34	326	35	319 321	36
	313		311		310		309		308		

Blank

Page

4-679 b

INDEX DIAGRAM.

Township 20 South, Range 5 West
380

380	389	3	4	5	6	7
381	390	8	9	10	11	12
382	388	13	14	15	16	17
383	386	18	19	20	21	22
384	384	23	24	25	26	27
385	382	28	29	30	31	32

379

Blank

Page

4-679 b

INDEX DIAGRAM.

Township 20 South, Range 6 West
 430 429 427 426 426 424

436	6	485	5	473	4	464	3	454	2	445	1	438
	485		484		472		463		453		444	
435	7	483	8	471	9	462	10	453	11	443	12	431
	483		482		470		461		452		443	
434	13	481	17	469	16	460	15	451	14	442	18	430
	480		480		469		460		451		441	
433	19	479	20	468	21	459	22	449	23	441	24	419
	478		477		467		458		449		440	
432	20	476	29	466	28	457	27	448	26	439	25	418
	476		475		466		456		447		438	
431	31	474	32	465	33	455	34	446	35	437	36	416
	407		407		406		406		406		406	
	414		413		411		410		409		407	

Blank

Page

BOOK A-506

"B"

FIELD NOTES

~~DEPENDING~~ SURVEY OF THE

DEPENDENT RESURVEY OF THE EAST AND SOUTH BOUNDARIES;

SURVEY OF THE NORTH AND WEST BOUNDARIES AND

SUBDIVISION, COMPLETING THE SURVEY OF

T. 17 S., R. 10 W.

Of the SALT LAKE Meridian,

In the State of UTAH

EXECUTED BY

ANDREW NELSON, U.S. CADASTRAL ENGINEER

SIDNEY R. RIESE, TRANSITMAN (TEMPORARY) CIVIL WORKS.

DON MADSEN, TRANSITMAN (TEMPORARY) CIVIL WORKS.

WALTER BYERGO, TRANSITMAN (TEMPORARY) CIVIL WORKS.

ELMO SAGER, TRANSITMAN (TEMPORARY) CIVIL WORKS.

JOHN C. STEWART, TRANSITMAN (TEMPORARY) CIVIL WORKS.

Under special instructions dated DECEMBER 13, 1933, which provided

for the surveys included under Group No. 253, bearing the approval of the

Commissioner of the General Land Office under date of JANUARY 18, 1934.

and assignment instructions dated DECEMBER 15, 1933.

Survey commenced DECEMBER 21, 1933.

Survey completed JANUARY 26, 1934.

INDEX DIAGRAM.

Township 17 SOUTH, Range 10 WEST

	25	24	22	21	20	19	
34	6 35 24	5 70 83	4 61 69	3 52 60	2 43 51	1 18 42	11
32	7 33 31	6 68 81	5 59 68	10 50 58	11 42 50	12 16 41	11
31	18 30 79	17 67 78	16 58 60	15 49 57	14 40 48	13 15 39	11
30	19 77 76	20 65 75	21 56 65	22 47 55	23 38 47	24 14 38	11
29	20 74 73	20 64 72	23 55 63	27 46 54	26 37 45	25 12 36	10
27	21 71 9	22 62 8	23 53 7	24 44 6	25 35 5	26 11 4	10
	2	2	2	3	3	3	

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Lines colored black were surveyed by Andrew Nelson,
 U.S. Cadastral Engineer.
 Lines colored orange were surveyed by Sidney R. Reese,
 Transitman (temporary).
 Lines colored blue were surveyed by Don Madsen,
 Transitman (temporary).
 Lines colored blue and orange were surveyed by Sidney
 R. Reese and Don Madsen, Transitmen (temporary).
 Lines colored violet were surveyed by Walter Byergo,
 Transitman (temporary).
 Lines colored red were surveyed by, John C. Stewart,
 Transitman (temporary).
 Lines colored brown were surveyed by Elmo Sager,
 Transitman (temporary).

Blank

Page

T. 17 S., R. 10 W.

The survey of township 17 south, range 10 west, was commenced December 21, 1933, and executed with Buff and Buff light mountain transit No. 9978, used by Andrew Nelson, U.S. Cadastral Engineer, Buff and Buff light mountain transit, No. 8028, used by Sidney R. Reese and Don Madsen, and Young and Sons light mountain transits Nos. 8492, 8517, and 8580, used by Walter Byergo, Elmo Sager, and John C. Stewart, Transitmen (temporary) CWA, respectively. Each instrument is equipped with a built solar attachment and full vertical circle. The horizontal limb of each transit is provided with two double verniers placed opposite to each other and reading to single minutes of arc, which is also the least count of the verniers of the latitude and declination arcs, and the vertical circle. These instruments were approved for use on this survey by the district cadastral engineer for Utah, conditional upon satisfactory field tests as stated in assignment instructions, dated December 15, 1933. The instruments were in good condition at the time of this survey and all adjustments were in good order. The country over which the lines of the survey are to be extended is all open desert, and the solar attachments were not used. All azimuths in this record are referred to true meridians determined by observations made upon Polaris during the progress of the survey. The lines were carried forward by double fore and back sights and the bearings determined by deflection angles.

Measurements were made with Lallie steel ribbon tapes, 5 and 8 chains in length, graduated every link for the first 100 links, and thereafter at intervals of 10 links. The tapes were tested by comparison with a Infilin standard steel tape, 1-chain long, and found correct. Measurements were made on the slope, and the vertical angle of each interval was determined by two clinometers in good adjustment; the horizontal equivalents only are entered in the field note record.

The approximate latitude of the southeast corner of the township, is $39^{\circ}17' N.$ and longitude $112^{\circ}55' W.$, as computed from data furnished in special instructions.

December 28, 1933, at the cor. of Tps. 17 and 18 S., Rs. 10 and 11 W., in approximate latitude $39^{\circ}17' N.$ and longitude $113^{\circ}02' W.$, at 11h 39m 13s a.m. by watch time, which carries correct 105th meridian standard time as compared with a Western Union clock at Delta, Utah, December 27, 1933; we make an hour angle observation on Polaris, east of the meridian, two each with the telescope in direct and reversed positions; reading the horizontal deflection angle from Polaris west to reference point, which is a well defined point on the sky line, approximately 8 miles North.

Watch fast of l.m.t. -----	32.14
Local mean time of observation -----	11h 07.14 a.m.
Mean horizontal angle, Polaris to reference point -----	$1^{\circ} 08.5' W.$
Azimuth of Polaris -----	$1^{\circ} 08.5' N.$
True bearing of reference point -----	North

At the same station we make a meridian observation of the sun for latitude, observing the altitude of the sun's lower limb with the telescope in direct position, reversing the transit and observing the sun's upper limb:

Apparent time of observation, noon -----	12h 00m 00s
Mean observed altitude -----	$27^{\circ} 27' 20''$
Reduced latitude -----	$39^{\circ} 17' 17''$

DEPENDENT RESURVEY OF THE SOUTH BOUNDARY, T.17 S., R.10 W.

Chains

Reestablishment of surveys executed
by George O. Chaney, U. S.
Deputy Surveyor, in
1891.

Random lines.

From the cor. of Tps. 17 and 18 S., Rs. 10 and 11 W., which is an iron post, 3 ins. diam., set, marked, and witnessed as described in the official record of the survey of T.18 S., R.11 W., Group 255, Utah.

East, bet. secs. 6 and 31.

56.58 Fall 41 lks. S. of $\frac{1}{4}$ sec. cor. secs. 6 and 31, hereinafter described.

The course of this half mile therefore is S.89°35'W., and the distance is 56.58 chs.

From the $\frac{1}{4}$ sec. cor.

East, with continuous measurement.

96.65 Fall 2.68 chs. S. of cor. of secs. 5, 6, 31, and 32, hereinafter described.

The course of this half mile therefore is S.86°10'W., and the distance is 40.16 chs.

East, bet. secs. 5 and 32.

39.98 Fall 1.14 chs. S. of $\frac{1}{4}$ sec. cor. secs. 5 and 32, hereinafter described.

The course of this half mile therefore is S.88°22'W., and the distance is 40.00 chs.

From the $\frac{1}{4}$ sec. cor.

East, with continuous measurement.

80.00 Fall 1.30 chs. S. of cor. of secs. 4, 5, 32, and 33, hereinafter described.

The course of this half mile therefore is S.88°08'W., and the distance is 40.04 chs.

East, bet. secs. 4 and 33.

39.95 Fall 1.24 chs. S. of $\frac{1}{4}$ sec. cor. secs. 4 and 33, hereinafter described.

The course of this half mile therefore is S.88°13'W., and the distance is 39.97 chs.

Chains

From the $\frac{1}{4}$ sec. cor. of secs. 3, 4, 33, and 34, hereinafter described.
 East, with continuous measurement.

80.02 Fall 1.13 chs. S. of cor. of secs. 3, 4, 33, and 34, hereinafter described.

The course of this half mile therefore is S. 88° 23' W., and the distance is 40.09 chs.

East, bet. secs. 3 and 34.

40.01 Fall 1.19 chs. S. of $\frac{1}{4}$ sec. cor. secs. 3 and 34, hereinafter described.

The course of this half mile therefore is S. 88° 18' W., and the distance is 40.03 chs.

From the $\frac{1}{4}$ sec. cor.

East, with continuous measurement.

80.08 Fall 1.24 chs. S. of cor. of secs. 2, 3, 34, and 35, hereinafter described.

The course of this half mile therefore is S. 88° 14' W., and the distance is 40.09 chs.

East, bet. secs. 2 and 35.

40.01 Fall 1.16 chs. S. of $\frac{1}{4}$ sec. cor. secs. 2 and 35, hereinafter described.

The course of this half mile therefore is S. 88° 20' W., and the distance is 40.03 chs.

From the $\frac{1}{4}$ sec. cor.

East, with continuous measurement.

80.07 Fall 1.33 chs. S. of cor. of secs. 1, 2, 35, and 36, hereinafter described.

The course of this half mile therefore is S. 88° 06' W., and the distance is 40.08 chs.

East, bet. secs. 1 and 36.

40.04 Fall 1.19 chs. S. of $\frac{1}{4}$ sec. cor. secs. 1 and 36, hereinafter described.

The course of this half mile therefore is S. 88° 18' W., and the distance is 40.06 chs.

From the $\frac{1}{4}$ sec. cor.


East, with continuous measurement.

80.07 Fall 1.19 chs. S. of cor. of Tps. 17 and 18 S., Rs. 9 and 10 W., hereinafter described.

DEPENDENT RESURVEY OF THE SOUTH BOUNDARY, T. 17 S., R. 9 W.

Chains

The course of this half mile therefore is S. 88° 18' W., and the distance is 40.05/chs.




True Lines.

The cor. of Tps. 17 and 18 S., Rs. 9 and 10 W., a juniper post 5 ins. sq., 4 ft. long, lying on the ground, with dim markings not legible, and witnessed by a lava stone, 6x4x3 ins., 12 ins. under the surface of the ground, plainly marked with a cross (X) on one face.

At the cor. point:

Set an iron post, 3 ft. long, 3 ins. diam., 30 ins. in the ground, with the original cor. post set alongside and the original lava stone accessory deposited at base, for cor. of Tps. 17 and 18 S., Rs. 9 and 10 W., with brass cap marked



18x18x12 ins., N., S., E., and W. of post, 3 ft. dist. dig pits,

Thence:

S. 88° 18' W., bet. secs. 1 and 36.


Over nearly level land, through medium dense shadscale and greasewood undergrowth.

4.80 Old road, bears N. and S.

40.05 The 1/4 sec. cor. secs. 1 and 36, which is a lava stone, 12x10x10 ins., firmly set, plainly marked 1/4 on N. face, and unwitnessed.

At the cor. point:

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, with the original cor. stone deposited alongside, for 1/4 sec. cor., with brass cap marked




of stone, 2 ft. base, 1 1/2 ft. high, N. of cor. /raise a mound

Cor. stands on nearly level land.

80.11 The cor. of secs. 1, 2, 35, and 36, which is a lava stone, 14x12x9 ins., lying on the ground, dimly marked with 5 notches on one edge, and unwitnessed.

Chains

At the cor. point:
 Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, with the original cor. stone deposited alongside, for cor. of secs. 1, 2, 35, and 36, with brass cap marked



1933

raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

Cor. stands on slightly rolling land.

Land, slightly rolling, with gentle southeasterly exposure and drainage.

Soil, deep heavy clay; 2nd rate.

Undergrowth, shadscale and greasewood.

No timber.

Poor grazing land.


S.88°06'W., bet. secs. 2 and 35.

Over gently rolling land, through medium dense shadscale and greasewood undergrowth.

40.08 The ¼ sec. cor. secs. 2 and 35, which is a quartzite, 10x9x4 ins., firmly set, plainly marked ¼ on N. face, and unwitnessed.

At the cor. point:

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, with the original cor. stone deposited alongside, for the ¼ sec. cor., with brass cap marked



1934

raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.

Cor. stands on gently rolling land.

Thence:


S.88°20'W., with continuous measurement.

80.11 The cor. of secs. 2, 3, 34, and 35, which is a quartzite 14x6x6 ins. above ground, firmly set, plainly marked 4 grooves on W. and 2 grooves on E. faces, and unwitnessed.

At the cor. point:

Chains

Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, with the original cor. stone deposited alongside, for cor. of secs. 2, 3, 34, and 35, with brass cap marked



1933

raise a mound

of stone, 2 ft. base, 1½ ft. high, W. of cor.

Cor. stands on gently rolling land.

Land, gently rolling, with slight southeasterly exposure and drainage.

Soil, deep heavy clay; 2nd rate.

Undergrowth, shadscale and greasewood.

No timber.

Poor grazing land.

S.88°14'W., bet. secs. 3 and 34.


Over gently rolling land, through medium dense shadscale and greasewood undergrowth.

18.40 Old road, bears S.80°W. and N.80°E.

40.09 The ¼ sec. cor. secs. 3 and 34, which is a lava stone, 14x9x6 ins., firmly set, plainly marked ¼ on N. face, and unwitnessed.

At the cor. point:

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, with the original cor. stone deposited alongside, for ¼ sec. cor., with brass cap marked



1934

raise a mound

of stone, 2 ft. base, 1½ ft. high, N. of cor.

Cor. stands on nearly level land.


Thence:

S.88°18'W., with continuous measurement.

80.12 The cor. of secs. 3, 4, 33, and 34, which is a quartzite 12x10x6 ins. above ground, firmly set, plainly marked 3 notches each on E. and W. edges, and unwitnessed.

At the cor. point:

Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, with the original cor. stone deposited alongside, for cor. of secs. 3, 4, 33, and 34, with brass cap marked

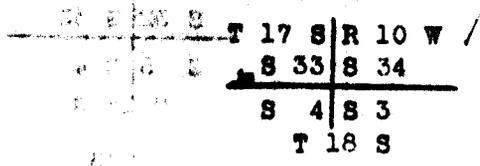

1933

raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Cor. stands on nearly level land.

Land, gently rolling, with gentle southeasterly exposure and drainage.

Soil, deep heavy clay; 2nd rate.

Undergrowth, shadscale and greasewood.

No timber.

Poor grazing land.

S. 88° 23' W., bet. secs. 4 and 33.

Over gently rolling land, through medium dense shadscale and greasewood undergrowth.


3.50
40.09

Old road, bears SE. and NW.

The 1/4 sec. cor. secs. 4 and 33, which is a lava stone, 14x6x4 ins. above ground, firmly set, plainly marked on N. face, and unwitnessed.

At the cor. point:

Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, with the original cor. stone deposited alongside, for 1/4 sec. cor., with brass cap marked



1934

raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor.

Cor. stands on nearly level land.

Thence:

S. 88° 13' W., with continuous measurement.

80.06

The cor. of secs. 4, 5, 32, and 33, which is a quartzite 14x10x7 ins. above ground, firmly set, plainly marked 4 grooves on E. and 2 grooves on W. faces, and unwitnessed.

At the cor. point:

Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, with the original cor. stone deposited

DEPENDENT RESURVEY OF THE SOUTH BOUNDARY, T. 17 S., R. 10 W.

Chains

alongside, for cor. of secs. 4, 5, 32, and 33, with brass cap marked

T 17 S	R 10 W
S 32	S 33
S 5	S 4
T 18 S	

1933

raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

Cor. stands on nearly level land.

Land, gently rolling, with gentle southeasterly exposure and drainage.

Soil; deep heavy clay; 2nd rate.

Undergrowth, shadscale and greasewood.

No timber.

Poor grazing land.

S.88°08'W., bet. secs. 5 and 32.

Over gently rolling land, through shadscale and greasewood undergrowth.

40.04 The ¼ sec. cor. secs. 5 and 32, which is a lava stone, 14x10x8 ins. above ground, firmly set, plainly marked ¼ on N. face, and unwitnessed.

At the cor. point:

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, with the original cor. stone deposited alongside, for ¼ sec. cor. secs. 5 and 32, with brass cap marked

¼	S 32
¼	S 5

1934

raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.

Cor. stands on nearly level land.

Thence:

S.88°22'W., with continuous measurement.

80.04 The cor. of secs. 5, 6, 31, and 32, which is lava stone, 10x9x6 ins. above ground, firmly set, plainly marked 5 notches on E. edge and 1 notch on W. edge, and unwitnessed.

At the cor. point:

Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in

Chains
brass

the ground, with the original cor. stone deposited alongside, for the cor of secs. 5, 6, 31, and 32, with brass cap marked

T 17 S | R 10 W
S 31 | S 32
S 6 | S 5
T 18 S

1933

raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Cor. stands on nearly level land.

Land, gently rolling, with gentle southeasterly exposure and drainage.

Soil, deep heavy clay; 2nd rate.

Undergrowth, shadscale and greasewood.

No timber.

Poor grazing land.

S.86°10'W., bet. secs. 6 and 31.

Over gently rolling land, through medium dense shadscale and greasewood undergrowth

16.90 Swasey Wash, 20 lbs. wide, 6 ft. deep, drains SE.

40.16 The 1/4 sec. cor. secs. 6 and 31, which is a lava stone, 12x10x10 ins., firmly set, plainly marked 1/4 on N. face, and unwitnessed.

At the cor. point:

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, with the original cor. stone deposited alongside, for 1/4 sec. cor. sec. 6 and 31, with brass cap marked

1/4 S 31
S 6

1934

raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor.

Cor. stands on gently rolling land.

Thence:

S.89°35'W., with continuous measurement.

80.16 Set an iron post, 3ft. long, 1 in. diam., 30 ins. in the ground, for cor. of lots 15 and 16, sec. 31, with brass cap marked

S 31
16 | 15

1934

DEPENDENT RESURVEY OF THE SOUTH BOUNDARY, T. 17 S., R. 10 W.

Chains

of stone, 2 ft. base, 1½ ft. high, N. of cor. ^{raise a mound}

Cor. stands on gently rolling land.

96.74 The cor. of Tps. 17 and 18 S., Rs. 10 and 11 W., which is a 3 in. iron post, heretofore described.

Land, gently rolling, with general southeasterly exposure and drainage.

Soil, deep heavy clay; 2nd rate.

Undergrowth, shadscale and greasewood.

No timber.

Poor grazing land.

DEPENDENT RESURVEY OF THE EAST BOUNDARY, T. 17 S., R. 10 W.

Reestablishment of surveys executed by

Jos. Gorlinski, U.S. Deputy

Surveyor, in 1874.

Random Lines.

From the cor. of Tps. 17 and 18 S., Rs. 9 and 10 W., heretofore described.

North, bet. secs. 31 and 36, making diligent searches at intervals of 40.00 chains for the ¼ sec. and sec. cors. of which I find no evidence; and at:

120.66 Fall 4 lks. W. of ¼ sec. cor. secs. 25 and 30, hereinafter described.

The course of the line bet. the cor. of Tps. 17 and 18 S., Rs. 9 and 10 W., and the ¼ sec. cor. secs. 25 and 30, therefore is N.0°01'E., and the proportionate distance of each half mile is 40.22 chs.

From a point 4 lks. W. of ¼ sec. cor. secs. 25 and 30.

North, bet. secs. 25 and 30.

40.00 Find no evidence of cor. of secs. 19, 24, 25, and 30.

Continue North, with continuous measurement.

80.44 Fall 3 lks. E. of ¼ sec. cor. secs. 19 and 24, hereinafter described.

The course of the line bet. the ¼ sec. cor. secs. 25 and 30, and the ¼ sec. cor. secs. 19 and 24, therefore is N.0°03'W., and the proportionate distance for each half mile is 40.22 chs.

Chains.

From a point 3 lks. E. of $\frac{1}{4}$ sec. cor. secs. 19 and 24. North, bet. secs. 19 and 24.

40.16 Fall 3 lks. W., of cor. of secs. 13, 18, 19, and 24, hereinafter described.

The course of this half mile therefore is N.0°05'E., and the distance is 40.16 chs.

For the N. three miles of random lines along the E. boundary of T.17 S., R.10 W., see the official record of the survey of T.16 S., R.9 W. of this group. No cors. were found on these three miles and the course of this line is N.0°48'E., and the distance for each half mile is 40.24 chs.

True Lines.


From the cor. of Tps. 17 and 18 S., Rs. 9 and 10 W., heretofore described.

N.0°01'E., along the W. boundary of sec. 31.

Over gently rolling land, through medium dense shedscale and greasewood undergrowth.

40.00 On gently rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ sec. cor. sec. 36, with brass cap marked




dig pits

18x18x12 ins., N. and S., of post, 3 ft. dist.

40.22 Proportionate point:

Set an iron post, 3 ft. long, 1 in diam., 30 ins. in the ground, for $\frac{1}{4}$ sec. cor. sec. 31, with brass cap marked



dig pits

18x18x12 ins., N. and S. of post, 3 ft. dist.

Cor. stands on gently rolling land.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, for cor. of secs. 25 and 36, T.17 S., R.10 W., with brass cap marked

DEPENDENT RESURVEY OF THE EAST BOUNDARY, T.17 S., R.10 W.

Chains

T 17 S	T 17 S
S 25	R 9 W
S 36	S 31
R 10 W	S 31

1933

raise a mound
of stone, 2 ft. base, 1½ ft. high, W. of cor.

Cor. stands on gently rolling land.

40.44 Proportionate point:

Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, for cor. of secs. 30 and 31, T.17 S., R.9 W., with brass cap marked

T 17 S	T 17 S
R 10 W	S 30
S 25	S 31
	R 9 W

1933

raise a mound
of stone, 2 ft. base, 1½ ft. high, E. of cor.

Cor. stands on gently rolling land.

Land gently rolling, with slight southeasterly exposure and drainage.

Soil, deep clay; 2nd rate.

Undergrowth, shadscale and greasewood.

No timber.

Poor grazing land.

N.0°01'E., along the W. boundary of sec. 30.

Over gently rolling land, through medium dense shadscale and greasewood undergrowth.

5.15 Old road, bears N.30°E. and S.30°W.

39.56 Northing of 40.00 chs. from cor. of secs. 25 and 36, T.17 S., R.10 W.

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for ¼ sec. cor. sec. 25, with brass cap marked

¼ S 25

1934

dig pits,
18x18x12 ins., N. and S. of post, 3 ft. dist.

40.23 The original ¼ sec. cor. secs. 25 and 30, which is a

DEPENDENT RESURVEY OF THE EAST BOUNDARY, ...

311/4110

Chains

No timber.

Poor grazing land.

N.0°03'W., along the W. boundary of sec. 19.


Over gently rolling land, through medium dense shadscale and greasewood undergrowth.

0.25 Center of improved State Highway, bears East to Delta, Utah, and West to Ely, Nevada.

8.90 Old road, bears E. and W.

39.12 Northing of 40.00 chs. from the cor. of secs. 24 and 25, T.17 S., R.10 W.

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for 1/4 sec. cor. sec. 24, with brass cap marked




18x18x12 ins., N. and S. of post, 3 ft. dist. dig pits,

Cor. stands on gently rolling land.

40.22 The original 1/4 sec. cor. secs. 19 and 24, which is a juniper post, 3 ins. sq., 2 1/2 ft. above ground, firmly set, plainly marked 1/4 on W. face, and unwitnessed.

At the cor. point:

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, with the original cor. monument set alongside, for 1/4 sec. cor. sec. 19, with brass cap marked



18x18x12 ins., N. and S. of post, 3 ft. dist. dig pits,


Cor. stands on gently rolling land.

Thence:

N.0°05'E., with continuous measurement.

79.12 Northing of 80.00 chs. from the cor. of secs. 24 and 25, T.17 S., R.10 W.

Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, for cor. of secs. 13 and 24, with brass cap marked



1934

V O L . 1 4 S U B S E Q U E N T R E C O U R S E S O F T H E E A S T B O U N D A R Y , T . 1 7 S . , R . 1 0 W .

Chains


raise a mound of
stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Cor stands on gently rolling land.

80.38 The original cor. of secs. 13, 18, 19, and 24, which is a juniper post, 4 ins. sq., 2 ft. above ground, firmly set, plainly marked 3 notches each on N. and S. faces, and unwitnessed.

At the cor. point:

Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, with the original cor. monument set alongside, for cor. of secs. 18 and 19, T.17 S., R.9 W., with brass cap marked

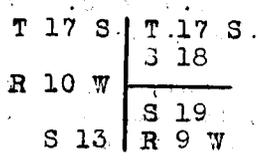

1934

18x18x12, ins., .NE. and SE. of post, 3 ft. dist. dig pits,

Cor. stands on gently rolling land.

Land, gently rolling, with general southeasterly exposure and drainage.

Soil, deep clay loam; 2nd rate.

Undergrowth, shadscale and greasewood.

No timber.

Poor grazing land.


N.0°48'E., along the W. boundary of sec. 18.

Over gently rolling land, through medium dense shadscale and greasewood undergrowth.

38.50 Old road, bears N.20°E. and S.20°W., at S. edge of a circular clay flat, bears with road; thence over clay flat.

38.74 Northing of 40.00 chs. from the cor. of secs. 13 and 24, T.17 S., R.10 W.

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for 1/4 sec. cor. sec. 13, with brass cap marked



1934

raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Cor. stands on level clay flat.


40.24 Proportionate point:

DEPENDENT RESURVEY OF THE EAST BOUNDARY, T.17 S., R.10 W.

Chains

511540

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for 1/4 sec. cor. sec. 18, with brass cap marked



1934


raise a mound of stone, 2 ft. base, 1 1/2 ft. high, E. of cor.

Cor. stands on level clay flat.

44.40 Leave clay flat and enter medium dense shadscale and greasewood undergrowth, bears E. and W.

76.74 Northing of 80.00 chs. from the cor. of secs. 13 and 24, T.17 S., R.10 W.

Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, for cor of secs. 12 and 13, T.17 S., R.10 W., with brass cap marked




1934

raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Cor. stands on gently rolling land.

10.48 Proportionate point:

Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, for cor of secs. 7 and 18, T.17 S., R.9 W., with brass cap marked



1934

raise a mound of stone, 2 ft. base, 1 1/2 ft. high, E. of cor.

Cor. stands on gently rolling land.

land, gently rolling, with general southeasterly exposure and drainage.

Soil, deep clay loam; 2nd rate.

Undergrowth, shadscale and greasewood.

No timber.

Poor grazing land:

N.0°48'E., along the W. boundary of sec. 7.

Chains

Over gently rolling land, through medium dense shadscale and greasewood undergrowth.

38.26 Northing of 40.00 chs. from the cor. of secs. 12 and 13, T. 17 S., R. 10 W.

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for 1/4 sec. cor. sec. 12, with brass cap marked

1/4 S 12

1934

raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Cor. stands on gently rolling land.

39.90 Old road, bears E. and W.

40.24 Proportionate point:

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground; for 1/4 sec. cor. sec. 7, with brass cap marked

1/4 S 7

1934

raise a mound of stone, 2 ft. base, 1 1/2 ft. high, E. of cor.

Cor. stands on gently rolling land.

78.26 Northing of 80.00 chs. from the cor. of secs. 12 and 13, T. 17 S., R. 10 W.

Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, for cor. of secs. 1 and 12, T. 17 S., R. 10 W., with brass cap marked

T 17 S | T 17 S
S 1 |
----- R 9 W
S 12 |
R 10 W | S 7

1934

raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Cor. stands on gently rolling land.

80.48 Proportionate point:

Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, for cor. of secs. 6 and 7, T. 17 S., R. 9 W., with brass cap marked

T 17 S | T 17 S
S 6 |
----- R 9 W
S 7 |
S 1 | R 9 W

1934

DEPENDENT RESURVEY OF THE EAST BOUNDARY OF T. 17 S., R. 10 W.

Chains

of stone, 2 ft. base, 1 1/2 ft. high, E. of cor. raise a mound

Cor. stands on gently rolling land.

Land, gently rolling, with general southeasterly exposure and drainage.

Soil, deep clay loam; 2nd rate.

Undergrowth, shadscale and greasewood.

No timber.

Poor grazing land.

N.0°48'E., along the W. boundary of sec. 6.

Over gently rolling land, through medium dense shadscale and greasewood undergrowth.

37.72 Northing of 40.00 chs. from the cor. of secs. 1 and 12, T.17 S., R.10 W.

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for 1/4 sec. cor. sec. 1, with brass cap marked.

1/4 S 1
1934

of stone, 2 ft. base, 1 1/2 ft. high, W. of cor. raise a mound

Cor. stands on gently rolling land.

40.24 Proportionate point:

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for 1/4 sec. cor. sec. 6, with brass cap marked

1/4 S 6
1934

of stone, 2 ft. base, 1 1/2 ft. high, E. of cor. raise a mound

Cor. stands on gently rolling land.

40.48 Intersect the cor. of Tps. 16 and 17 S., Rs. 9 and 10 W., which is an iron post, 3 ins. diam., set, marked, and witnessed as described in the official record of the survey of T.16 S., R.9 W. of this group.

Land, gently rolling, with general southeasterly exposure and drainage.

Soil, deep clay loam; 2nd rate.

Undergrowth, shadscale and greasewood.

No timber.

Poor grazing land.

Chains

W O R 1 2 S 1 T

January 4, 1934, at the cor. of Tps. 16 and 17 S.,
 Rs. 9 and 10 W., heretofore described, in approximate
 latitude 39°23' N. and longitude 112°55' W., at 4h 03m
 12s p.m. by watch time, which reads correct 105th
 meridian time as compared with a Western Union clock
 at Delta, Utah, January 3, 1934, we make an hour angle
 observation on Polaris, east of the meridian, two each
 with the telescope in direct and reversed positions,
 reading the horizontal deflection angle from Polaris,
 in the direction west to a flag pole about 20 chs. North.

Watch fast of 1.m.t.-----	31.6m
Local mean time of observation-----	3h 31.6m p.m.
Mean horizontal angle from Polaris to flag pole-----	1°00.9'W.
Azimuth of Polaris-----	1°00.9'E.
True bearing of flag pole-----	North.

I deflect an angle of 90° to the left from this true
 meridian, and run

West, along the S. boundary of sec. 36, T.16 S., R.10 W.,
 on a transit line describing the tangent, which bears W.

Over gently rolling land, through medium dense shadscale
 and greasewood undergrowth.

25.90 Old road, bears N.60°E. and S.60°W.

37.00 Begin gradual ascent over slight SE. slope of rolling bench
 land, bears N. and S.30°W.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in
 the ground, for $\frac{1}{4}$ sec. cor. sec. 36, with brass cap
 marked

$\frac{1}{4}$ S 36

1933

raise a mound
 of stone, 3 ft. base, 3 ft. high, N. of cor.

Cor. stands on gently rolling bench land, 40 ft. above
 township cor.

43.51 Point 40.00 chs. E. of the closing cor. of secs. 1 and
 2, T.17 S., R.10 W.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in
 the ground, for $\frac{1}{4}$ sec. cor. sec. 1, with brass cap
 marked

$\frac{1}{4}$ S 1

1934

raise a mound
 of stone, 3 ft. base, 2 ft. high, S. of cor.

80.00 North 1 lk. from the tangent:

Set an iron post, 3 ft. long, 2 ins. diam., 33 ins. in
 the ground, for cor. of secs. 35 and 36, T.16 S., R.10 W.,
 with brass cap marked

SURVEY OF THE NORTH BOUNDARY T.17 S., R.10 W.

Chains

T 16 S | R 10 W
S 35 | S 36

S 1

T 17 S R 10 W

1933

raise a mound
of stone, 4 ft. base, 3 ft. high, N. of cor.
Cor. stands on gently rolling bench land, 40 ft. above
the $\frac{1}{4}$ sec. cor. sec. 36

Land, gently rolling, with general southeasterly exposure
and drainage.

Soil, deep sandy clay, with small pebbles on surface;
2nd rate.

Undergrowth, shadscale and greasewood.

No timber.

Poor grazing land.

From point on tangent 1 lk. S. of cor.

West, along the S. boundary of sec. 35, on a transit
line describing the tangent, which bears S.89°59.3'W.

Over grad. SE. slope of gently rolling land, through
medium dense shadscale and greasewood undergrowth.

3.51 North 1 lk. from the tangent:

Point for the closing cor. of secs. 1 and 2, T.17 S.,
R.10 W., hereinafter described.

28.70 Wash, 18" wide, 2 ft. deep, drains S.80°E.

40.00 North 2 lks. from the tangent:

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in
the ground, for $\frac{1}{4}$ sec. cor. sec. 35, with brass cap
marked

$\frac{1}{4}$ S 35

1933

raise a mound
of stone, 3 ft. base, 3 ft. high, N. of cor.

Cor. stands on gently rolling land, 55 ft. above sec. cor.

43.345 North 2 lks. from the tangent:

Point midway bet. the closing cors. of secs. 1 and 2
and secs. 2 and 3, T.17 S., R.10 W.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in
the ground, for $\frac{1}{4}$ sec. cor. sec. 2, with brass cap marked

$\frac{1}{4}$ S 2

1934

W. C. R. & V. SURVEY OF THE NORTH BOUNDARY T.17 S., R.10 W.

Chains

raise a mound of stone, 3 ft. base, 2 ft. high, S. of cor.

80.00 North 3 lks. from the tangent:

Set an iron post, 3 ft. long, 2 ins. diam., 33 ins. in the ground, for cor. of secs. 34 and 35, T.16 S., R.10 W. with brass cap marked

T 16 S | R 10 W

S 34 | S 35

S 2

T 17 S | R 10 W

1933

raise a mound of stone, 4 ft. base, 3 ft. high, N. of cor.

Cor. stands on gradual SE. slope, nearly level with $\frac{1}{4}$ sec. cor. sec. 35.

Land, gently rolling, with general southeasterly exposure and drainage.

Soil, deep sandy clay loam, with scattered patches of rock and gravel; 2nd and 3rd rate.

Undergrowth, shadscale and greasewood.

No timber.

Poor grazing land.

From point on tangent 3 lks. S. of sec. cor.

West, along the S. boundary of sec. 34, on a transit line describing the tangent, which bears S.89°58.6'W.

Ascend gradually over general E. slope of rolling land, through medium dense shadscale and greasewood undergrowth.

3.18 North 3 lks. from the tangent:

Point for the closing cor. of secs. 2 and 3, T.17 S., R.10 W., hereinafter described.

20.30 Wash, 15 lks. wide, 3 ft. deep, drains S.60°E.

32.10 Old road at base of hills, bears N.10°E. and S.10°W.; ascend gradual E. slope of low rolling hills.

40.00 North 5 lks. from the tangent:

Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground to solid rock and in a mound of stone to top, for $\frac{1}{4}$ sec. cor. sec. 34, with brass cap marked

$\frac{1}{4}$ S 34

1934

raise a mound of stone, 4 ft. base, 2 ft. high, N. of cor.

Chains

Cor. stands on E. edge of a flat top of spur, 100 ft. above the cor. of secs. 34 and 35, projects S.15°E.; thence over flat top of spur.

43.26

North 5 lks. from the tangent:

00.08

Point midway bet. the closing cor. of secs. 2 and 3, and secs. 3 and 4, T.17 S., R.10 W.

Set an iron post, 3 ft. long, 1 in. diam., 16 ins. in the ground to solid rock, with a volcanic stone, 10x8x8 ins., marked X, deposited at base, and in a mound of stone to top, for 1/4 sec. cor. sec. 3, with brass cap marked

1/4 S 3

1934

Cor. stands on W. edge of flat top of spur; projects S.15°E.; thence over rolling hilly land.

44.20

Draw, 40 ft. deep, drs. S.30°E.

56.90

Wash, 30 lks. wide, 2 ft. deep, drains S.75°E.

67.70

Spur, 75 ft. above 1/4 sec. cor. sec. 34, projects S.80°E.; descend gradual SW. slope.

71.00

Draw, 20 ft. below spur, drains S.70°E.; ascend gradual E. slope.

80.00

North 7 lks. from the tangent:

Set an iron post, 3 ft. long, 2 ins. diam., 10 ins. in the ground to solid rock, with a limestone, 6x6x4 ins., marked X, deposited at base, and in a mound of stone to top, for cor. of secs. 33 and 34, T.16 S., R.10 W., with brass cap marked

T 16 S | R 10 W

S 33 | S 34

S 3

T 17 S

1934

Cor. stands on gradual E. slope, 75 ft. above draw.

Land, rolling, with general southeasterly exposure and drainage.

Soil, E. portion, deep sandy clay, with scattered patches of rock and gravel, 2nd rate; W. portion, shallow sandy loam, mixed with rock and gravel, 4th rate.

Undergrowth, shadscale and greasewood.

No timber.

Poor grazing land.

From point on tangent 7 lks. S. of sec. cor.

West, along the S. boundary of sec. 33, on a transit line describing the tangent, which bears S:89°57.9'W.

SURVEY OF THE AREA BOUNDARY T.17 S., R.10 W.

- Chains Ascend gradual E. slope of rolling hilly land, through medium dense shadeless and greasewood undergrowth.
- 3.34 North 7 lks. from the tangent:
 Point for the closing cor. of secs. 3 and 4, T.17 S., R.10 W., hereinafter described.
- 4.40 Wash, near head, 20 lks. wide, 6 ft. deep, drains S.75°E.
- 9.75 Spur, 35 ft. above sec. cor., projects S.65°E.; this point is 485 ft. above the cor. of Tps. 16 and 17 S., Rs. 9 and 10 W.; descend gradual SW. slope.
- 14.00 Draw, 50 ft. below spur, drains S.70°E.; ascend gradual E. slope.
- 29.40 Head of draw, 10 ft. deep, drains SE. about 3 chains dist., thence S.20°E.
- 35.50 Spur, 75 ft. above draw at 14.00 chains., projects S.15°W.; thence along general S. slope.
- 36.00 Wash, 10 lks. wide, 2 ft. deep, drains SW.
- 40.00 North 10 lks. from the tangent:
 Set an iron post, 3 ft. long, 1 in. diam., 8 ins. in the ground to solid rock, with a volcanic stone, 10x8x8 ins., marked X, deposited at base, and in a mound of stone to top, for $\frac{1}{2}$ sec. cor. sec. 33, with brass cap marked
- 1 S 33
- 1934
- Cor. stands on general S. slope, 5 ft. above spur.
- 43.45 North 10 lks. from the tangent:
 Point midway bet. the closing cor. of secs. 3 and 4, and secs. 4 and 5, T.17 S., R.10 W.
 Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground to solid rock and in a mound of stone to top, for $\frac{1}{2}$ sec. cor. sec. 4, with brass cap marked
- 1 S 4
- 1934
- of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, S. of cor. raise a mound
- 46.70 Small draw, 20 ft. deep, drains S.20°E.
- 51.40 Draw, 20 ft. below $\frac{1}{2}$ sec. cor. sec. 33, drains SW.; ascend gradual E. slope.
- 66.40 Spur, 60 ft. above draw, projects S.; thence along general S. slope.
- 80.00 North 13 lks. from the tangent:
 Set an iron post, 3 ft. long, 2 ins. diam., 10 ins. in the ground to solid rock, with a volcanic stone, 10x6x6 ins., marked X, deposited at base, and in a mound of stone to top, for cor. of secs. 32 and 33, T.16 S., R.10 W., with brass cap marked

SURVEY OF THE NORTH BOUNDARY T.17 S., R.10 W.

Chains

T 16 S	R 10 W
S 32	S 33

S 4
T 17 S

1934

Cor. stands on general S. slope, 10 ft. above spur.

Land, rolling hills, with general southerly exposure and drainage.

Soil, shallow sandy loam, mixed with rock and gravel; 4th rate.

Undergrowth, shadscale and greasewood.

No timber.

Poor grazing land.

From point on tangent 13 lks. S. of sec, cor.

West, along the S. boundary of sec. 32, on a transit line describing the tangent, which bears S.89°57.2'W.

Ascend gradually over general S. slope of rolling hilly land, through medium dense shadscale and greasewood undergrowth

3.35 North 13 lks. from the tangent:

Point for the closing cor. of secs. 4 and 5, T.17 S., R.10 W., hereinafter described.

13.70 Small draw, 10 ft. deep, drains SW. from N.20°W.; thence ascend abrupt E. slope.

20.20 Spur, 155 ft. above sec. cor., projects S.; descend over W. slope.

40.00 North 17 lks. from the tangent:

Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground to solid rock, with a volcanic stone, 10x6x6 ins., deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor. sec. 32, with brass cap marked

$\frac{1}{4}$ S 32

1934

Cor. stands on gentle W. slope at base of rolling hilly land, 150 ft. below spur, bears NW. and SE.; thence descend gradual SW. slope of rolling bench land.

43.445 North 17 lks. from the tangent:

Point midway bet. the closing cors. of secs. 4 and 5, and secs. 5 and 6, T.17 S., R.10 W.

Set an iron post, 3 ft. long, 1 in. diam., 6 ins. in the ground to solid rock, with a volcanic stone 10x6x4 ins., marked X, deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor. sec. 5, with brass cap marked

SURVEY OF THE NORTH BOUNDARY T. 17 S., R. 10 W.

Chains

4 S 5

1934

58.70 Wash, 15 lks. wide, 1 ft. deep, drains S.15°E.

62.10 Wash, 25 lks. wide, 3 ft. deep, drains S.15°E.

80.00 North 20 lks. from the tangent:

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 31 and 32, T.16 S., R.10 W., with brass cap marked

T 16 S	R 10 W
S 31	S 32

S 5
T 17 S

1934

raise a mound of stone, 2½ ft. high, 2 ft. base, N. of cor.

Cor. stands on gradual SW. slope, 40 ft. below sec. cor. sec. 32.

Land, E. half mile, rolling hilly land; W. half mile, rolling bench land. Entire mile with general southerly exposure and drainage.

Soil, shallow sandy loam, mixed with rock and gravel; 4th rate.

Undergrowth, shadscale and greasewood.

No timber.

Poor grazing land.

From point on tangent 20 lks. S. of sec. cor.

West, along the S. boundary of sec. 31, on a transit line describing the tangent, which bears S.89°56.5'W.

Over gradual S. slope of rolling bench land, through medium dense shadscale and greasewood undergrowth.

3.54 North 20 lks. from the tangent:

Point for the closing cor. of sec. 5 and 6, T.17 S., R.10 W., hereinafter described.

11.00 East edge of wash, bears N. and S.

13.50 Center of wash, 5.00 chs. wide, 3 ft. deep, drains S.

16.00 West edge of wash, bears N. and S.

28.00 Wash, 30 lks. wide, 1 ft. deep, drains SW.

40.00 North 25½ lks. from the tangent:

Set an iron post, 3 ft. long, 1 in. diam., 8 ins. in

SURVEY OF THE NORTH HOUNDANT T.17 S., R.10 W.

Chains

the ground to solid rock, with a volcanic stone, 12x12 ins., marked X, deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor. sec. 31, with brass cap marked

$\frac{1}{4}$ S 31

1934

Cor. stands on gradual S. slope, 10 ft. below sec. cor. in edge of old road, bears NE. and SW.

43.54 North 25 $\frac{1}{2}$ lks. from the tangent:

Point which is West 40.00 chs. from the closing cor. of secs. 5 and 6, T.17 S., R.10 W.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor. sec. 6, with brass cap marked

$\frac{1}{4}$ S 6

1934

of stone, 3 ft. base, 2 ft. high, S. of cor. raise a mound

54.20 Wash, 15 lks. wide, 2 ft. deep, drains S.15°E.

68.20 Wash, 10 lks. wide, 1 ft. deep, drains S.30°E.

78.70 Wash, 10 lks. wide, 1 ft. deep, drains S.20°W.

80.00 North 29 $\frac{1}{2}$ lks from the tangent:

Set an iron post, 3 ft. long, 1 in. diam., 8 ins. in the ground to solid rock, with a volcanic stone, 8x6x6 ins., marked X, deposited at base, and in a mound of stone to top, for the cor. of lots 7 and 8, sec. 31, T.16 S., R.10 W., with brass cap marked

S 31

7 | 8

1934

Cor. stands on gradual S. slope, nearly level with $\frac{1}{4}$ sec. cor. sec. 31.

83.54 North 29 $\frac{1}{2}$ lks. from the tangent:

Point which is West 80.00 chs. from the closing cor. of secs. 5 and 6, T.17 S., R.10 W.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, or cor. of lots 4 and 5, sec. 6, T.17 S., R.10 W., with brass cap marked

5 | 4

S 6

1934

of stone, 3 ft. base, 2 ft. high, S. of cor. raise a mound


99.51 North 31 $\frac{1}{2}$ lks. from the tangent:

SURVEY OF THE NORTH BOUNDARY, T.17 S., R.10 W.

Chains

Point of intersection with a line projected North from the cor. of Tps. 17 and 18 S., Rs. 10 and 11 W.

Set an iron post, 3 ft. long, 3 ins. diam., 28 ins. in the ground; for cor. of Tps. 16 and 17 S., Rs. 10 and 11 W., with brass cap marked



1934

raise a mound of stone, 6 ft. base, 5 ft. high, S. of cor.

Cor. stands on gently rolling land, nearly level with lot cor.

Land, gently rolling bench, with general southerly exposure and drainage.

Soil, deep and shallow sandy loam, mixed with rock and gravel; 3rd and 4th rate.

Undergrowth, shadscale and greasewood.

No timber.

Poor grazing land.

From this cor. Tatow Knob, bears N.71°51'W., about 18 miles dist.

Swasey Peak, bears N.7°09'W., about 15 1/2 miles dist.

Sawtooth or Notch Peak, bears S.51°53'W., about 26 miles dist.

A large mound of stone on top of hill, bears N.36°01'E., about 1/2 mile dist.

SURVEY OF THE WEST BOUNDARY T.17 S., R.10 W.


From the cor. of Tps. 17 and 18 S., Rs. 10 and 11 W., heretofore described.

North, along the E. boundary of sec. 36.

Over gently rolling land, through medium dense shadscale and greasewood undergrowth.

15.17

S. 80.00 chs. from the closing cor. of secs. 30 and 31. Set an iron post, 3 ft. long, 1 1/2 in. diam., 28 ins. in the ground, cor. of lots 7 and 16, sec. 31, T.17 S., R.10 W., with brass cap marked



1934

raise a mound of stone, 2 1/2 ft. base, 2 ft. high, E. of cor.


SURVEY OF THE WEST BOUNDARY T. 17 S., R. 11 W.

Chains

Cor. stands on nearly level land, nearly level with township cor.

40.00

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor. sec. 36, with brass cap marked



Deposit a volcanic stone, 10x6x6 ins., alongside of post, marked with a cross (X). No other accessories available.

Cor. stands on gently rolling land, nearly level with lot cor.

45.50

Center of improved State Highway, bears N.35°E. to Delta, Utah, and S.35°W. to Ely, Nevada.


51.70

Wash, 10 lks. wide, 3 ft. deep, drains S.80°E.

55.17

S. 40.00 chs. from the closing cor. of secs. 30 and 31.

Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. cor. sec. 31, with brass cap marked




of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, E. of cor. raise a mound

Cor. stands on gently rolling land, nearly level with $\frac{1}{4}$ sec. cor. sec. 36.

80.00

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 25 and 36, T.17 S., R.11 W. with brass cap marked



of stone, 2 $\frac{1}{2}$ ft. base, 2 ft. high, W. of cor. raise a mound

Cor. stands on gently rolling land, nearly level with $\frac{1}{4}$ sec. cor. sec. 31.

Land, gently rolling, with general southeasterly exposure and drainage.

Soil, deep sandy loam and light clay, mixed with small rock and gravel; 2nd and 3rd rate.

Undergrowth shadscale and greasewood.

No timber.

Poor grazing land.


North, along the E. boundary of sec: 25.
Over gently rolling land, through medium dense shadscale
and greasewood undergrowth.

4.10 Wash, 5 lks. wide, 1 ft. deep, drains S.70°E.

15.17 Point for the closing cor. of secs. 30 and 31, T.17 S.,
R.10 W., hereinafter described.

35.60 Wash, 12 lks. wide; 1 ft. deep, drains N.60°E.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in
the ground, for 1/4 sec. cor. sec: 25, with brass cap
marked



1934


raise a mound
of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Cor. stands on gently rolling land.

50.20 Wash, 10 lks. wide, 1 1/2 ft. deep, drains E.

55.17 Northing of 40.00 chs. from the closing cor. of secs.
30 and 31, T.17 S., R.10 W.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in
the ground, for 1/4 sec. cor. sec. 30, with brass cap
marked




1934

raise a mound
of stone, 3 ft. base, 2 ft. high, E. of cor.

Cor. stands on gently rolling land, nearly level with
1/4 sec. cor. sec. 25.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in
the ground; for cor. of secs: 24 and 25, T.17 S., R.11 W.,
with brass cap marked



1934

raise a mound
of stone, 3 ft. base, 2 ft. high, W. of cor.

Cor. stands on gently rolling land, nearly level with
1/4 sec. cor. sec. 30.

Land, gently rolling, with general southeasterly
exposure and drainage.

Soil, sandy loam and light clay, with small rocks on
surface; 3rd rate.

Undergrowth, shadscale and greasewood.

SURVEY OF THE WEST BOUNDARY T.17 S., R.10 W.

Chains

No timber.

Poor grazing land.

North, along the E. boundary of sec. 24.

Over gently rolling land, through medium dense shadscale and greasewood undergrowth.

9.70 Wash, 20 lks. wide, 1 ft. deep, in draw, 20 ft. deep, drains N.80°E.

15.17 Northing of 80.00 chs. from the closing cor. of secs. 30 and 31, T.17 S., R.10 W.

Set an iron post, 3 ft. long, 2 ins. diam., 16 ins. in the ground to solid rock, with a volcanic stone, 8x6x4 ins., deposited at base, and in a mound of stone to top, for cor. of secs. 19 and 30, with brass cap marked

	T 17 S
S 24	S 19
R 11 W	S 30
	R 10 W
1934	

Cor. stands on gentle E. slope, nearly level with cor. of secs. 24 and 25.

21.40 Same wash as noted at 9.70 chs., 15 lks. wide, 1 1/2 ft. deep, drains N.30°W.

24.30 Base of E. point of hill, bears N.30°W. and S.30°W.

25.30 Same wash as noted at 21.40 chs., drains NE.

28.20 Swasey wash, 50 lks. wide, 4 ft. deep, in wide draw, 20 ft. deep, drains N.85°E.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, and in a small mound of stone to top, for 1/4 sec. cor. sec. 24, with brass cap marked

1/4 S 24
1934

No rock available for an additional mound.

Cor. stands in general bottom of wide draw, 30 ft. below cor. of sec. 24 and 25.

43.60 Leave bottom of draw and enter rolling bench land, bears N.75°E. and S.75°W.

55.17 Northing of 40.00 chs. from the cor. of secs. 19 and 30.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for 1/4 sec. cor. sec. 19, with brass cap marked

1/4 S 19
1934

51
SURVEY OF THE WEST BOUNDARY T.17 S., R.10 W.

Chains

of stone, 2½ ft. base, 2 ft. high, ^{raise a mound} E. of cor.
Cor. stands on gently rolling land, 35 ft. above ¼ sec. cor. sec. 24.

61.50 Old road, bears S.60°E. and N.60°W.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 18 and 24, with brass cap marked.

T 17 S	
S 13	R 10 W
S 24	S 19
R 11 W	
1934	

of stone, 2½ ft. base, 2 ft. high, ^{raise a mound} W. of cor.

Cor. stands on gently rolling land, 15 ft. above ¼ sec. cor. sec. 19.

Land, gently rolling, with general southeasterly exposure and drainage.

Soil, deep and shallow sandy loam, mixed with small rock and gravel; 2nd and 3rd rate.

Undergrowth, shadscale and greasewood.

No timber.

Poor grazing land.

North, along the E. boundary of sec. 13.

Over gently rolling bench land, through medium dense shadscale and greasewood undergrowth.

4.80 Draw, 20 ft. deep, drains SW.

12.90 Draw, 10 ft. deep, drains S.60°W.

15.17 Northing of 80.00 chs. from the cor. of secs. 19 and 30.

Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 18 and 19, T.17 S., R.10 W., with brass cap marked

R 11 W	T 17 S
	S 18
S 13	S 19
	R 10 W
1934	

of stone, 2½ ft. base, 2 ft. high, ^{raise a mound} E. of cor.

Cor. stands on gently rolling land, 15 ft. above sec. cor.

38.50 Old road, bears S.80°E. and N.80°W.

SURVEY OF THE WEST BOUNDARY T. 17 S., R. 11 W.

Chains
40.00

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor. sec. 13, with brass cap marked

$\frac{1}{4}$ S 13

1934

raise a mound of stone, 2 $\frac{1}{2}$ ft. base, 2 ft. high, W. of cor.

Cor. stands on gently rolling land, 30 ft. above cor. of secs. 13 and 24.

55.17

Northing of 40.00 chs. from the cor. of secs. 18 and 19.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor. sec. 18, with brass cap marked

$\frac{1}{4}$ S 18

1934

raise a mound of stone, 3 ft. base, 2 ft. high, E. of cor.

Cor. stands on gently rolling land, 15 ft. above $\frac{1}{4}$ sec. cor. sec. 13.

60.00

Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 12 and 13, T. 17 S., R. 11 W. with brass cap marked

T 17 S	
S 12	R 10 W
S 13	S 18
R 11 W	

1934

raise a mound of stone, 2 $\frac{1}{2}$ ft. high, 2 ft. base, W. of cor.

Cor. stands on gently rolling land, 20 ft. above $\frac{1}{4}$ sec. cor. sec. 18.

Land, gently rolling bench, with general southerly exposure and drainage.

Soil, deep sandy loam, with small rocks on surface; 3rd rate.

Undergrowth, shadscale and greasewood.

No timber.

Good grazing land.

North, along the E. boundary of sec. 12.

Ascend gradually over gentle SE. slope of rolling bench land, through medium dense shadscale and greasewood.

13.30

Old road, bears N. 60° E. and S. 60° W

Chains


enlarged

Soil, deep sandy loam, with small rocks on surface, 3rd rate.
 Undergrowth, shadscale and greasewood.
 No timber.
 Poor grazing land.

North, along the E. boundary of sec. 1.

Ascend gradually over general S. slope of rolling bench land, through medium dense shadscale and greasewood undergrowth.

15.17 Northing of 80.00 chs. from the cor. of secs. 7 and 18.
 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 6 and 7, T.17 S., R.10 W., with brass cap marked




raise a mound

of stone, 3 ft. base, 2 ft. high, E. of cor.

Cor. stands on gentle S. slope, 20 ft. above cor. of secs 1 and 12.

31.60 Wash, 6 lbs. wide, 1 ft. deep, dr ins S.35°E.; thence over rocky land, bears S.35°E. and N.35°W.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for 1/4 sec. cor. sec. 1, with brass cap marked




raise a mound

of stone, 3 ft. base, 2 ft. high, W. of cor.

Cor. stands on gentle S. slope, 35 ft. above the cor. of secs. 6 and 7.

44.20 Old road, bears N.70°E. and S.70°W.

55.17 Northing of 40.00 chs. from the cor. of secs. 6 and 7.
 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for 1/4 sec. cor. sec. 6, with brass cap marked



raise a mound

of stone, 2 1/2 ft. base, 2 ft. high, E. of cor.

33


SURVEY OF THE WEST BOUNDARY T.17 S., R.10 W.

Chains

Cor. stands on gentle S. slope, 20 ft. above $\frac{1}{4}$ sec. cor. sec. 1.

80.00

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for cor. of lots 1 and 8, sec. 1, with brass cap marked



1934

raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Cor. stands on gentle S. slope, 35 ft. above $\frac{1}{4}$ sec. cor. sec. 6.

97.38

The cor. of Tps. 16 and 17 S., Rs. 10 and 11 W., heretofore described, 25 ft. above lot cor.

Land, gently rolling bench, with general southerly exposure and drainage.

Soil, S. portion, deep sandy loam, with small rock on surface, 3rd rate; N. portion shallow sandy loam, mixed with rock and gravel; 4th rate.

Shadscale and greasewood undergrowth.

No timber.

Poor grazing land.

SUBDIVISION OF T.17 S., R.10 W.

From the cor. of secs. 25 and 36, on the E. boundary of the township, heretofore described.

West, on random line bet. secs. 25 and 36.

40.00

Set temp. $\frac{1}{4}$ sec. cor.

80.00

Set temp. cor. of secs. 25, 26, 35, and 36.

Thence:

S.0°01'E., on random line bet. secs. 35 and 36.

40.00

Set temp. $\frac{1}{4}$ sec. cor.

82.33

Intersect the S. boundary of the township, 8 lks. E. of cor. of secs. 1, 2, 35, and 36, heretofore described.

Thence:

From the cor. of secs. 1, 2, 35, and 36.

N.0°01'W., on true line bet. secs. 35 and 36.

Over gently rolling land, through medium dense shadscale and greasewood undergrowth.

23.40

Old road, bears E. and W.


24.20

Old road, bears N.60°E. and S.60°W.

Chains
42.33

Southing of 40.00 chs. from the cor. of secs. 25, 26, 35, and 36.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor. secs. 35 and 36, with brass cap marked




dig pits,

18x18x12 ins., N. and S. of post, 3 ft. dist.

Cor. stands on gently rolling land, nearly level with sec. cor.

82.33

Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 25, 26, 35, and 36, with brass cap marked



1933

of stone, 2 $\frac{1}{2}$ ft. base, 2 ft. high, W. of cor. raise a mound

Land, gently rolling, with slight southeasterly exposure and drainage.

Soil, deep sandy loam, mixed with small gravel, and light clay; 2nd rate.

Undergrowth, shadscale and greasewood.

No timber.

Poor grazing land.

From the cor. of secs. 25 and 36, on the E. boundary of the township, heretofore described.

West, on a sectional correction line bet. secs. 25 and 36.


Over slightly rolling land, through medium dense shadscale and greasewood undergrowth.

1.45

Old road, bears N. and SW.

40.04

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked



dig pits.

40.00

18x18x12 ins., N. and S. of post, 3 ft. dist.
Cor. stands on slightly rolling land, nearly level with sec. cor.

60.08

The cor. of secs. 25, 26, 35, and 36, nearly level with 1/4 sec. cor.

Land, slightly rolling, with general southerly exposure and drainage.

Soil, deep heavy clay; 2nd rate.

Undergrowth, shadscale and greasewood.

No timber.


Poor grazing land.

N. 0° 01' W., bet. secs. 25 and 26.

Over gently rolling land, through medium dense shadscale and greasewood undergrowth.

40.00

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for 1/4 sec. cor., with brass cap marked



18x18x12 ins., N. and S. of post, 3 ft. dist. dig pits,

Cor. stands on gently rolling land, nearly level with sec. cor.

74.10


Old ditch, to divert water from highway, 5 lks. wide, 12 ins. deep, from W., drains E.

77.80

Center of improved State Highway, bears N. 79° E. to Delta, Utah, and S. 79° W. to Ely, Nevada.

80.00

Set an iron post, 3 ft. long, 2 in. diam., 28 ins. in the ground, for cor. of secs. 23, 24, 25, and 26, with brass cap marked

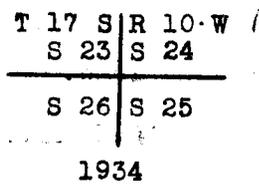

raise a mound of stone, 3 ft. base, 2 1/2 ft. high, W. of cor.

Cor. stands on gently rolling land, nearly level with 1/4 sec. cor.


Land, gently rolling, with slight southeasterly exposure and drainage.

Soil, deep sandy loam, with scattered patches of gravel; 2nd rate.

Chains		Dist. in Chains
	Undergrowth, shadscale and greasewood.	
	No timber.	
	Poor grazing land.	80.03
	East, on random line bet. secs. 24 and 25.	
40.00	Set temp. $\frac{1}{4}$ sec. cor.	
80.08	Intersect the E. boundary of the township, 2 lks. N. of cor. of secs. 24 and 25, heretofore described.	
	Thence:	
	N.89°59'W., on true line bet. secs. 24 and 25.	
	Over gently rolling land through medium dense shadscale and greasewood undergrowth.	
40.04	Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked	
	$\frac{1}{4} \frac{S\ 24}{S\ 25}$	
	1934	
	of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor. raise a mound	
	Cor. stands on nearly level land.	
68.70	Center of improved State Highway, bears S.85°W. to Ely, Nevada, and N.85°E. about 3.60 chs. dist., thence E. to Delta, Utah.	
80.08	The cor. of secs. 23, 24, 25, and 26, nearly level with $\frac{1}{4}$ sec. cor.	
	Land, slightly rolling, with general southeasterly exposure and drainage.	
	Soil, deep light clay; 2nd rate.	
	Undergrowth, shadscale and greasewood.	
	No timber.	
	Poor grazing land.	
	N.0°01'W., bet. secs. 23 and 24.	
	Over nearly level land, through medium dense shadscale, greasewood, and bud sage undergrowth.	
21.30	Old road, bears E. and W.; a junction of a cross road, bearing northerly and southerly, bears E. about 2.00 chs. dist.	
39.10	Old road, bears NW. about 45 lks. dist., thence N., and SE. about 2.00 chs. dist., thence S.15°E.	

Chains
40.00

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked



1934

raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

Cor. stands on nearly level land, nearly level with sec. cor.

52.50


Wash, 10 lks. wide, 2 ft. deep, drains E.

77.90

Wash, 8 lks. wide, 1 ft. deep, from NW., drains S.80°E.

80.00

Set a iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor of secs. 13, 14, 23, and 24, with brass cap marked



1934

raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

Cor. stands on nearly level land, nearly level with $\frac{1}{4}$ sec. cor.

Land, nearly level, with slight southeasterly exposure and drainage.

Soil, deep light clay, with scattered areas of sand and gravel; 2nd and 3rd rate.

Undergrowth, shadscale, greasewood, and bud sage.

No timber.

Poor grazing land.

S.89°59'E., on random line bet. secs. 13 and 24.

40.00

Set temp. $\frac{1}{4}$ sec. cor.

80.12

Intersect the E. boundary of the township, 7 lks. N. of cor. of secs. 13 and 24, Meretofore described.

Thence:

N.89°56'W., on true line bet. secs. 13 and 24.

Over nearly level land, through medium dense shadscale and greasewood undergrowth.

6.40

Old road, bears N. and S.

40.06

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked

Chains

00.00

S 13
S 24

1934

raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.

Cor. stands on nearly level land, nearly level with sec. cor.

80.12 The cor. of secs. 13, 14, 23, and 24, nearly level with ¼ sec. cor.

Land, nearly level, with slight southeasterly exposure and drainage.

Soil, deep light clay and scattered patches of sandy loam, mixed with gravel; 2nd and 3rd rate.

Undergrowth, shadscale and greasewood.

No timber.

Poor grazing land.

N.0°01'W., bet. secs. 13 and 14, on a sectional guide meridian
Over gently rolling land, through scattered shadscale and greasewood undergrowth.

34.40 Old road, bears N.40°E. and S.40°W.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for ¼ sec. cor., with brass cap marked

S 14 | S 13
1934

raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

Cor. stands on gently rolling land, nearly level with sec. cor.

71.50 Wash, 10 lks. wide, 1 ft. deep, drains SE.

74.70 Wash, 10 lks. wide, 1 ft. deep, drains SE.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 11, 12, 13, and 14, with brass cap marked

T 17 S | R-10 W
S 11 | S 12
S 14 | S 13
1934

of stone, 2 ft. base, 1½ ft. high, W. of cor. raise a mound

Chains

1.2002 Cor. stands on gently rolling land, nearly level with $\frac{1}{4}$ sec. cor.

Land, gently rolling, with general southeasterly exposure and drainage.

Soil, deep light clay, with scattered patches of sandy loam, mixed with small rock and gravel; 2nd and 3rd rate.

Undergrowth, shadscale and greasewood.

No timber.

Poor grazing land.

S.89°56'E., on random line bet. secs. 12 and 13.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

81.32 Intersect the E. boundary of the township, 2 lks. N. of cor. of secs. 12 and 13. heretofore described.

Thence:

N.89°55'W., on true line bet. secs. 12 and 13.

Over gently rolling land, through medium dense shadscale greasewood, and yellow top brush.

22.00 Wash, 8 lks. wide, 1 ft. deep, drains SE.

33.50 Top of low rise, projects N. 1.50 chs. dist. to end and bears S.

41.32 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked

	S 12
$\frac{1}{4}$	<hr style="width: 50px; margin: 0 auto;"/>
	S 13

1934

raise a mound of

stone 2 ft. base, 1 $\frac{1}{2}$ ft. high, N. of cor.

Cor. stands on gently rolling land, nearly level with sec. cor.

66.20 Old road, bears N.20°E. and S.20°W.

71.70 Old road, bears N.15°E. and S.15°W.

81.32 The cor. of secs. 11, 12, 13, and 14, nearly level with $\frac{1}{4}$ sec. cor.

Land, gently rolling, with general southeasterly exposure and drainage.

Soil, deep light clay and patches of sandy loam, mixed with small rock and gravel; 2nd and 3rd rate.

Undergrowth, shadscale, greasewood, and yellow top.

No timber.

Poor grazing land.

SUBDIVISION OF T.17 S., R.10 W.

Chains

N.0°01'W., on a sectional guide meridian, bet. secs. 11 and 12.

Over gently rolling land, through medium dense shadscale, greasewood, and yellow top undergrowth.

11.80 Top of a low rise, projects E. about 2.50 chs. dist. to end and bears W.

20.60 Top of a low rise, projects E. about 4.00 chs. to end and bears W.

23.40 Wash, 30 lbs. wide, 2 ft. deep, drains SE.

34.50 Old road, bears E. and W.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$
 S 11 | S 12
 1934

of stone, 2 ft. base, 1 $\frac{1}{4}$ ft. high, W. of cor. raise a mound

Cor stands on gently rolling land, nearly level with $\frac{1}{4}$ sec. cor.

75.90 Old road, bears S.20°E. and N.20°W.

80.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for cor. of secs. 1, 2, 11, and 12, with brass cap marked

T.17 S. | R.10 W.
 S 2 | S 1
 S 11 | S 12
 1934

of stone, 2 ft. base, 1 $\frac{1}{4}$ ft. high, W. of cor. raise a mound

Cor. stands on gently rolling land, nearly level with $\frac{1}{4}$ sec. cor.

Land, gently rolling, with general southeasterly exposure and drainage.

Soil, deep light clay and sandy loam with scattered patches of small rock and gravel; 2nd and 3rd rate.

Undergrowth, shadscale and greasewood and yellow top.

No timber.

Poor grazing land.

S.89°55'E., on random line bet. secs. 1 and 12.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

82.42 Intersect the cor. of secs. 1 and 12 on the E. boundary of the township, heretofore described.

...SUBDIVISION OF T.17 S., R.10 W.


Chains

Thence;

N.89°55'W., on true line bet. secs. 1 and 12.

Over gently rolling land, through medium dense shadscale, greasewood, and mountain rush undergrowth,

42.42 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked



1934

raise a mound of stone, 3 $\frac{1}{2}$ ft. base, 2 $\frac{1}{2}$ ft. high, N. of cor.

Cor. stands on gently rolling land, nearly level with sec. cor.

45.50 Wash, 30 lks. wide, 1 ft. deep, drains SE.

82.42 The cor. of secs. 1, 2, 11, and 12, nearly level with $\frac{1}{4}$ sec. cor.

Land, gently rolling with general southeasterly exposure and drainage.

Soil, deep light clay and sandy loam, mixed with fine gravel; 2nd and 3rd rate.

Undergrowth, shadscale, greasewood, and mountain rush..

No timber.

Poor grazing land.


N.0°01'W., on a sectional guide meridian, bet. secs. 1 and 2.

Over gently rolling land, through medium dense shadscale, greasewood, bud sage, and mountain rush undergrowth.

12.40 Wash, 15 lks. wide, 4 ft. deep, drains SE.

38.40 Wash, 30 lks. wide, 1 ft. deep, drains E.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked



1934

raise a mound of stone, 3 ft. base, 3 ft. high, W. of cor.

Cor. stands on gently rolling land, nearly level with sec. cor.

47.70 Old road, bears NE. and SW.

75.00 Wash, 10 lks. wide, 1 ft. deep, drains E.

82.55 Intersect the N. boundary of the township.

Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for the closing cor. of secs. 1 and 2, T.17 S., R.10 W., with brass cap marked

SUBDIVISION OF T.17 S., R.10 W.

Chains

T 16 S R 10 W	
S 35	
S 2	S 1
T 17 S	R 10 W
C	C

1934

raise a mound
of stone, 3 ft. base, 2 ft. high, S. of cor.
Cor. stands on gently rolling land, nearly level with
 $\frac{1}{4}$ sec. cor.

From point of intersection the cor. of secs. 35 and 36,
T.16 S., R.10 W., heretofore described, bears East,
3.51 chs. dist.

Land, gently rolling, with general southeasterly exposure
and drainage.

Soil, deep light clay and sandy loam, mixed with small
rock and fine gravel; 3rd rate.

Undergrowth, shadscale, greasewood, bud sage, and
mountain rush.

No timber.

Poor grazing land.

From the cor. of secs. 25, 26, 35, and 36.

West, on random line bet. secs. 26 and 35.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.00 Set temp. cor. of secs. 26, 27, 34, and 35.

Thence:

S.0°01'E., on random line bet. secs. 24 and 35.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.00 Set temp. lot cor.

84.74 Intersect the S. boundary of the township, at the cor.
of secs. 2, 3, 34, and 35, heretofore described.

Thence:

From the cor. of secs. 2, 3, 34, and 35.

N.0°01'W., on true bet. secs. 34 and 35

Over gently rolling land, through medium dense shadscale
and greasewood undergrowth.

4.74 Southing of 80.00 chs. from the cor. of secs. 26, 27, 34,
and 35.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in
the ground, for cor. of lots 4 and 5, sec. 34, with
brass cap marked

S34 $\frac{4}{5}$ 1 S35

1934

of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, raise a mound
W. of cor.

8.00 Old road, bears N.60°E. and S.60°W.

8.60 Old road, bears N.60°E. and S.60°W.


3A 45

SUBDIVISION OF T.17 S., R.10 W.

Chains
44.74

Southing of 40.00 chs. from the cor. of secs. 26, 27, 34, and 35.

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked




raise a mound

of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.

Cor. stands on gently rolling land, nearly level with sec. cor.

84.74

Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 26, 27, 34, and 35, with brass cap marked



raise a mound

of stone, 2 $\frac{1}{2}$ ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.

Cor. stands on gently rolling land, nearly level with $\frac{1}{4}$ sec. cor.

Land, gently rolling; with slight southerly exposure and drainage.

Soil, deep sandy loam and light clay, with patches of small rock and gravel; 2nd and 3rd rate.

Undergrowth, shadscale and greasewood.

No timber.

Poor grazing land.


From the cor. of secs. 25, 26, 35, and 36.

West, on a sectional correction line bet. secs. 26 and 35.

Over nearly level land, through medium dense shadscale and yellow top undergrowth.

40.00

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked



dig pits,

18x18x12 ins., E. and W. of post, 3 ft. dist.

SUBDIVISION OF T. 17 S., R. 10 W.

Chains

Cor. stands on nearly level land.

80.00

The cor. of secs. 26, 27, 34, and 35, nearly level with $\frac{1}{4}$ sec. cor.

Land, nearly level, with slight southeasterly exposure and drainage.

Soil, deep light clay and sandy loam, with patches of small rock and gravel; 2nd and 3rd rate.

Undergrowth, shadscale and yellow top.

No timber.


Poor grazing land.

N.0°01'W., bet. secs. 26 and 27.

Over gently rolling land, through medium dense shadscale and greasewood undergrowth.

45.00

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked



of stone, 2 $\frac{1}{2}$ ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor. raise a mound


Cor. stands on gently rolling land, nearly level with sec. cor.

65.50

Center of improved State Highway, bears N.79°E. to Delta, Utah, and S.79°W. to Ely, Nevada.

0.00

Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, for cor. of secs. 22, 23, 26, and 27, with brass cap marked



of stone, 2 $\frac{1}{2}$ ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor. raise a mound

Cor. stands on gently rolling land, nearly level with $\frac{1}{4}$ sec. cor.

Land, gently rolling, with slight southeasterly exposure and drainage.

Soil, deep clay, and sandy loam, with patches of small rock and gravel; 2nd and 3rd rate.

Undergrowth, shadscale and greasewood.

No timber.

Poor grazing land.

W. SUBDIVISION OF T217 S10R210 W.

Chains
40.00

East, on random line bet. secs. 23 and 26.

Set temp. 1/4 sec. cor.

79.96

Intersect N. and S. line, 5 lks. S. of cor. of secs. 23, 24, 25, and 26.

Thence;

S.89°58'W., on true line bet. secs. 23 and 26.

Over gently rolling land, through medium dense shadscale, greasewood, and yellow top undergrowth.

39.98

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for 1/4 sec. cor., with brass cap marked

S 23

S 26

1934

raise a mound of stone, 2 1/2 ft. base, 1 1/2 ft. high, N. of cor.

Cor. stands on gently rolling land, nearly level with sec. cor.

79.96

The cor. of secs. 22, 23, 26, and 27, nearly level with 1/4 sec. cor.

Land, gently rolling, with slight southeasterly exposure and drainage.

Soil, deep clay and sandy loam, with patches of small rock and gravel; 2nd and 3rd rate.

Undergrowth, shadscale, greasewood, and yellow top.

No timber.

Poor grazing land.

N.0°01'W., bet. secs. 22 and 23.

Over nearly level land, through medium dense shadscale and yellow top undergrowth.

33.60

Old road, bears S.70°E. and N.70°W.

40.00

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for 1/4 sec. cor., with brass cap marked

S 22 S 23

1934

raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Cor. stands on nearly level land.

41.70


Wash, 12 lks. wide, 3 ft. deep, from N., drains S.60°E.; thence along general bottom of wash.

SUBDIVISION OF T. 17 S. 14 N. 10 W.

Chains

50.00 Leave bottom of wash, which drains from N. 10° E., across over nearly level land.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 14, 15, 22, and 23, with brass cap marked

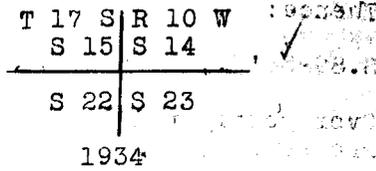

raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

Land, nearly level, with slight southeasterly exposure and drainage.

Soil, deep clay and sandy loam, with patches of rock and gravel; 2nd and 3rd rate.

Undergrowth, shadscale and yellow top.

No timber.

Good grazing land.

N. 89° 58' E., on random line bet. secs. 14 and 23.

40.00 Set temp. ¼ sec. cor.

79.84 Intersect N. and S. line, 5 lks. N. of cor. of secs. 13, 14, 23, and 24.

Thence:


West, on true line bet. secs. 14 and 23.

Over nearly level land, through medium dense shadscale and yellow top undergrowth.

6.40 Old road, bears S. 10° E. and N. 10° W.

12.30 Wash, 10 lks. wide, 1½ ft. deep, drains SE.

39.92 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for ¼ sec. cor., with brass cap marked



1934

of stone, 2 ft. base, 1½ ft. high, N. of cor. raise a mound

Cor. stands on nearly level land.

54.40 Wash, 10 lks. wide, 1 ft. deep, drains SE.

70.00 East base of a rocky knoll, bears N. and S., about 15 ft high.

71.60 Wash, 10 lks. wide, 1 ft. deep, drains S. 40° E., at SW.

Chains

base of knoll, about 15 ft. high, bears N.40°W. and S.40°E.

76.40 Wash, 16 lks. wide, 3 ft. deep, drains SE.

79.84 The cor. of secs. 14, 15, 22, and 23, nearly level with 1/4 sec. cor.

Land, nearly level, with slight southeasterly exposure and drainage.

Soil, deep sandy loam, with numerous patches of small rock and gravel; 3rd rate.

Undergrowth, shadscale and yellow top.

No timber.

Poor grazing land.

N.0°01'W., bet. secs. 14 and 15.

Over gently rolling land, through medium dense shadscale and scattered mountain rush undergrowth.


1.80 Wash, 20 lks. wide, 3 ft. deep, drains SE.

10.00 Wash, 10 lks. wide, 3 ft. deep, drains SE.

17.80 Wash, 20 lks. wide, 2 ft. deep, drains SE.

20.30 Wash, 20 lks. wide, 2 ft. deep, drains SE.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for 1/4 sec. cor., with brass cap marked




raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Cor. stands on gently rolling land, nearly level with sec. cor.

51.90 Head of a wash, 8 lks. wide, 1 ft. deep, drains SE.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 10, 11, 14, and 15, with brass cap marked



raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Cor. stands on gently rolling land, nearly level with 1/4 sec. cor.

Land, gently rolling, with general southeasterly exposure

SUBDIVISION OF T.17 S., R.10 W.

Chains

and drainage.

Soil, deep light clay and sandy loam, mixed with gravel and patches of rock; 3rd rate.

Undergrowth, shadscale and mountain rush.

No timber.

Poor grazing land.

East, on random line bet. secs. 11 and 14.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

79.78 Intersect N. and S. line, 7 lks. S. of cor. of secs. 11, 12, 13, and 14.

Thence:


S.89°57'W., on true line bet. secs. 11 and 14.

Over gently rolling land, through medium dense shadscale and mountain rush undergrowth.

7.50 Wash, 60 lks. wide, 1 ft. deep, drains SE.

29.80 Top of low rise, projects S. about 15.00 chs. dist., and bears N.

39.89 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked



1934

of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, N. of cor. raise a mound

Cor. stands on gently rolling land, nearly level with sec. cor.

57.60 Top of low rise, bears N. and S.

79.78 The cor. of secs. 10, 11, 14, and 15, nearly level with $\frac{1}{4}$ sec. cor.

Land; gently rolling, with general southeasterly exposure and drainage.

Soil, light clay and sandy loam, mixed with gravel and patches of rock; 3rd rate.

Undergrowth, shadscale and mountain rush.

No timber.

Poor grazing land.


N.0°01'W., bet. secs. 10 and 11.

Chains

37.70 Over gently rolling land, through medium dense shadscale and mountain rush, undergrowth.

37.70 Old road, bears E. and W.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked




of stone, 3 ft. base, 2 ft. high, W. of cor. / raise a mound

Cor. stands on gently rolling land, nearly level with sec. cor.

78.70 Old road, bears N.65°E. and S.65°W.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, for cor. of secs. 2, 3, 10, and 11, with brass cap marked



of stone, 2½ ft. base, 1½ ft. high, W. of cor. / raise a mound

Cor. stands on gently rolling land, nearly level with $\frac{1}{4}$ sec. cor.

Land, gently rolling, with general southeasterly exposure and drainage.

Soil, light clay and sandy loam, mixed with rock and gravel; 3rd rate.

Undergrowth, shadscale and mountain rush.

No timber.

Poor grazing land.

N.89°57'E., on random line bet secs. 2 and 11.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

79.74 Intersect N. and S. line, at the cor. of secs. 1, 2, 11, and 12.

Thence:

S.89°57'W., on true line bet. secs. 2 and 11.

Over gently rolling land, through medium dense shadscale and scattered mountain rush undergrowth.

1.20 Old road, bears N. and S.

Chains
39.87

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, with a volcanic stone, 8x6x6 in. marked & deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked

S 2. 00.00

$\frac{1}{4}$
S 11

1934

Cor. stands on gently rolling land, nearly level with sec. cor.

67.40 Wash, 20 lks. wide, 1 ft. deep, drains SE.

76.90 Old road, bears N.65°E. and S.65°W.

79.74 The cor. of secs. 2, 3, 10, and 11, nearly level with $\frac{1}{4}$ sec. cor.

Land, gently rolling, with general southeasterly exposure and drainage.

Soil, sandy loam, mixed with gravel and scattered patches of rock; 3rd rate.

Undergrowth, shadscale and mountain rush.

No timber.

Poor grazing land.

N.0°01'W., on true line bet. secs. 2 and 3.

Over gently rolling land, through medium dense shadscale, greasewood, bud sage, and mountain rush undergrowth.

19.00 Wash, 5 lks. wide, 3 ft. deep, drains SE.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$
S 3 | S 2

1934

of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor. raise a mound

Cor. stands on gently rolling land, nearly level with sec. cor.

48.30 Wash, 16 lks. wide, 3 ft. deep, drains S.80°E.

57.80 Wash, 15 lks. wide, 2 ft. deep, drains E.

68.80 Wash, 12 lks. wide, 2 ft. deep, drains E.

69.70 Wash, 12 lks. wide, 4 ft. deep, drains SE.

71.20 Wash, 37 lks. wide, 3 ft. deep, drains SE.

82.53 Intersect the N. boundary of the township.

T.17 S., R.10 W.

33.03 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for the closing cor. of secs. 2 and 3, T.17 S., R.10 W., with brass cap marked.

T.16 S R 10 W
S 34

S 3 | S 2
T 17 S R 10 W
C C

1934

raise a mound of stone, 3 ft. base, 2 ft. high, S. of cor.

Cor. stands on gently rolling land, nearly level with 1/4 sec. cor.

From point of intersection the cor. of secs. 34 and 35, T.16 S., R.10 W., heretofore described, bears East, 3.18 chs. dist.

Land, gently rolling, with general easterly exposure and drainage.

Soil, deep light clay and sandy loam, mixed with fine gravel and scattered patches of rock; 2nd and 3rd rate.

Undergrowth, shadscale, greasewood, bud sage, and mountain rush.

No timber.

Poor grazing land.

From the cor. of secs. 26, 27, 34, and 35.

West, on random line bet. secs. 27 and 34.

40.00 Set temp. 1/4 sec. cor.

80.00 Set temp. cor. of secs. 27, 28, 33, and 34.

Thence:

S.0°02'E., on random line bet. secs. 33 and 34.

40.00 Set temp. 1/4 sec. cor.

80.00 Set temp. lot cor.

87.19 Intersect the S. boundary of the township, 10 lks. E. of cor. of secs. 3, 4, 33, and 34, heretofore described.

Thence:

From the cor. of secs. 3, 4, 33, and 34.

N.0°02'W., on true line bet. secs. 33 and 34.

Over gently rolling land, through medium dense shadscale and greasewood undergrowth.

7.19 Southing of 80.00 chs. from the cor. of secs. 27, 28, 33, and 34.

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for cor. of lots 4 and 5, sec. 33, and lots 1 and 8, sec. 34, with brass cap marked

S 33 4 | 1 S 34
5 | 8

1934

raise a mound of stone, 3 ft. base, 1 1/2 ft. high, W. of cor.

SUBDIVISION OF T.17 S., R.10 W.

Chains
47.19

Southing of 40.00 chs. from the cor. of secs. 27, 28, 33, and 34.

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked

S 33 | S 34

1933

raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Cor. stands on gently rolling land, nearly level with cor. of secs. 3, 4, 33, and 34.

87.19

Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, for cor. of secs. 27, 28, 33, and 34, with brass cap marked

T 17 S | R 10 W
S 28 | S 27
S 33 | S 34

1933

raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Cor. stands on gently rolling land, nearly level with $\frac{1}{4}$ sec. cor.

Land, gently rolling, with slight southeasterly exposure and drainage.

Soil, deep light clay and sandy loam, mixed with fine gravel; and and 3rd rate.

Undergrowth, shadscale and greasewood.

No timber.

Poor grazing land.

From the cor. of secs. 26, 27, 34, and 35.

West, on a sectional correction line bet. secs. 27 and 34.

Over nearly level land, through medium dense shadscale and greasewood undergrowth.

40.05

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked

S 27
 $\frac{1}{4}$ ———
S 34

1933

raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, N. of cor.

Cor. stands on nearly level land.

80.10

The cor. of secs. 27, 28, 33, and 34, nearly level with $\frac{1}{4}$ sec. cor.

Notes

Land, nearly level, with slight southeasterly exposure and drainage.

Soil, deep clay, with patches of sandy loam, mixed with small gravel; 2nd and 3rd rate.

Undergrowth, shadscale and greasewood.

No timber.


Poor grazing land.

N.0°02'W., bet. secs. 27 and 28.

Over nearly level land, through medium dense shadscale and yellow top undergrowth.

25.00 Top of low rise, bears E. and W.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for 1/4 sec. cor., with brass cap marked




of stone, 2 ft. base, 1 1/2 ft. high, W. of cor. / raise a mound

Cor. stands on nearly level land.

47.00 Center of improved State Highway, bears N.79°E. to Delta, Utah, and S.79°W. to Ely, Nevada.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 21, 22, 27, and 28, with brass cap marked



of stone, 3 ft. base, 2 ft. high, W. of cor. / raise a mound

Cor. stands on nearly level land.

Land, nearly level, with slight southerly exposure and drainage.

Soil, light clay, mixed with fine gravel; 2nd rate.

Undergrowth, shadscale and yellow top.

No timber.

Poor grazing land.

Beats on random line bet. secs. 22 and 27.


SUBDIVISION OF T.17 S.1. R.10 W.

Chains

40.00 Set temp. $\frac{1}{4}$ sec. cor. S 22
 80.08 Intersect N. and S. line, 2 lks N. of cor. of secs. 22,
 23, 26, and 27.

Thence:
 N.89°59'W., on true line bet. secs. 22 and 27.
 Over nearly level land, through medium dense shadscale
 and yellow top undergrowth.

40.04 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in
 the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked



1934

raise a mound
 of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.
 Cor. stands on nearly level land.

60.02 The cor. of secs. 21, 22, 27, and 28, nearly level with
 $\frac{1}{4}$ sec. cor.

land, nearly level, with slight southeasterly exposure
 and drainage.

Soil, deep clay, with scattered patches of fine gravel;
 2nd rate.

Undergrowth, shadscale and yellow top.

No timber.


Poor grazing land.

N.0°02'W., bet. secs. 21 and 22.

Over gently rolling land, through medium dense shadscale
 and scattered mountain rush.

35.20 Old road, bears N.85°E. and S.85°W.

40.08 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in
 the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked



raise a mound
 of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

Cor. stands on gently rolling land, nearly level with
 sec. cor.

60.00 Top of low rise, bears E. and W.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in
 the ground, for cor. of secs. 15, 16, 21, and 22, with
 brass cap marked

Chains

T 17 S	R 10 W
S 16	S 15
S 21	S 22

1934

raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

Cor. stands on gently rolling land, nearly level with ¼ sec. cor.

Land, gently rolling, with slight southeasterly exposure and drainage.

Soil, shallow light clay, with scattered patches of rock and gravel; 2nd rate.

Undergrowth, shadscale and mountain rush.

No timber.

Poor grazing land.

S. 89°59' E., on random line bet. secs. 15 and 22.

40.00 Set temp. ¼ sec. cor.

80.12 Intersect N. and S line, 2 lks. S. of cor. of secs. 14, 15, 22, and 23.

Thence:

West, on true line bet. secs. 15 and 22.

Over gently rolling land, through medium dense shadscale and scattered mountain rush undergrowth.

40.06 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for ¼ sec. cor., with brass cap marked

¼	S 15
	S 22

1934

raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.

Cor. stands on gently rolling land, nearly level with sec. cor.

80.12 The cor. of secs. 15, 16, 21 and 22, nearly level with ¼ sec. cor.

Land, gently rolling, with slight southeasterly exposure and drainage.

Soil, shallow clay, with scattered patches of rock and gravel; 2nd rate.

Undergrowth, shadscale and mountain rush.

No timber.

Chains


Poor grazing land.

N.0°02'W., bet. secs. 15 and 16.

Over gently rolling land, through medium dense shadscale scattered yellow top and mountain rush undergrowth.

36.00 Wash, 12 lks. wide, 2 ft. deep, drains S.S.


40.00 Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked



of stone, 3 $\frac{1}{2}$ ft. base, 2 ft. high, W. of cor. raise a mound

Cor. stands on gently rolling land, nearly level with sec. cor.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, for cor. of secs. 9, 10, 15, and 16, with brass cap marked



of stone, 2 $\frac{1}{2}$ ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor. raise a mound

Cor. stands on gently rolling land, nearly level with $\frac{1}{4}$ sec. cor.

Land, gently rolling, with slight southeasterly exposure and drainage.

Soil, shallow clay, with scattered patches of sandy loam, mixed with rock and gravel; 2nd and 3rd rate.

Undergrowth, shadscale, yellow top, and mountain rush.

No timber.

Poor grazing land.

East, on random line bet. secs. 10 and 15.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.12 Intersect N. and S. line, at the cor. of secs. 10, 11, 14, and 15.

Thence:

West, on true line bet. secs. 10 and 15.

W. 02. SURVEYS OF T. 17 S., R. 10 W.

Chains

Over gently rolling land, through medium dense shadscale, yellow top, and mountain rush.

40.06 Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked

S 10
 $\frac{1}{4}$
 S 15

1934

raise a mound of stone, 3 $\frac{1}{2}$ ft. base, 2 $\frac{1}{2}$ ft. high, W. of cor.

Cor. stands on gently rolling land, nearly level with sec. cor.

80.12 The cor. of secs. 9, 10, 15, and 16, nearly level with $\frac{1}{4}$ sec. cor.

Land, gently rolling, with general southeasterly exposure and drainage.

Soil, shallow clay, with scattered patches of sandy loam mixed with rock and gravel; 2nd and 3rd rate.

Undergrowth, shadscale, yellow top, and mountain rush.

No timber.

Poor grazing land.

N. 0° 02' W., bet. secs. 9 and 10.

Over gently rolling land, through medium dense shadscale and scattered bud sage and mountain rush.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$
 S 9 | S 10
 1934

raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.

Cor. stands on gently rolling land, nearly level with sec. cor.

40.90 Old road, bears E. and W.

63.20 Old road, bears NE. and SW.

75.00 Wash, 20 lks. wide, 2 ft. deep, drains SE.

77.50 Wash, 10 lks. wide, 1 ft. deep, drains SE.

80.00 Set an iron post, 5 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 3, 4, 9, and 10, with brass cap marked

T 17 S | R 10 W
 S 4 | S 3

1934

SUBDIVISION OF T.17 S., R.10 W.

Chains

of stone, 3 ft. base, 2 ft. high, ^{raise mound} W. of ~~sec.~~

Cor., stands on gently rolling land, nearly level with $\frac{1}{4}$ sec. cor.

Land, gently rolling, with general southeasterly exposure and drainage.

Soil, shallow clay and sandy loam, with patches of rock and gravel; 3rd rate.

Undergrowth, shadscale, bud sage, and mountain rush.

No timber.

Poor grazing land.

East, on random line bet. secs. 3 and 10.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.10 Intersect N. and S. line, at the cor of secs. 2, 3, 10, and 11.

Thence:

West, on true line bet. secs. 3 and 10.

Over gently rolling land, through medium dense shadscale, bud sage, mountain rush, and yellow top undergrowth.

34.30 Wash, 60 lks. wide, 5 ft. deep, drains SE.

40.05 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked

S 3

$\frac{1}{4}$ S 10

1934

of stone, 3 ft. base, 2 ft. high, ^{raise a mound} N. of cor.

Cor. stands on gently rolling land, nearly level with sec. cor.

57.80 Wash, 15 lks. wide, $1\frac{1}{2}$ ft. deep, drains SE.

65.80 Old road, bears NE. and SW.

80.10 The cor. of secs. 3, 4, 9, and 10, nearly level with $\frac{1}{4}$ sec. cor.

Land, gently rolling, with general southeasterly exposure and drainage.

Soil, sandy loam, mixed with rock and gravel; 3rd rate.

Undergrowth, shadscale, bud sage, mountain rush, and yellow top.

No timber.

Poor grazing land.

W. D. R. SUBDIVISION OF T.17 S., R.10 W.

Chains


N. 90° 27' W., on true line bet. secs. 3 and 4.

Over gently rolling land, through scattered shadscale, bud sage, and mountain rush undergrowth.

2.70 Wash, 8 lks. wide, 1 ft. deep, from NW., and drains S. 75° E.

30.00 Wash, 28 lks. wide, 4 ft. deep, drains SE.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 24 ins. in the ground and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked



raise a mound of stone, 4 ft. base, 3 ft. high, W. of cor.

Cor. stands on gently rolling land, nearly level with sec. cor.

48.00 Wash, 20 lks. wide, 2 ft. deep, drains SE.

50.00 Spur, 10 ft. high, projects SE.

51.40 Wash, 20 lks. wide, 6 ft. deep, drains SW.

55.60 Wash, 26 lks. wide, 6 ft. deep, drains SW.; thence ascend gradual S. slope of rolling hilly land.

64.90 Spur, 20 ft. above last wash, projects SW.; descend gradual NE. slope.


74.30 Wash, 30 lks. wide, 4 ft. deep, in draw, 45 ft. below spur, drains SW.; ascend gradual SW. slope.

80.00 Spur, 30 ft. above draw, projects S. 80° E.; thence along general E. slope.

81.60 Wash, 20 lks. wide, 6 ft. deep, drains SW.

82.40 Intersect the N boundary of the township.

Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for the closing cor. of secs. 3 and 4, T.17 S., R.10 W., with brass cap marked



raise a mound of stone, 4 ft. base, 3 ft. high, S. of cor.

From point of intersection the cor. of secs. 33 and 34, T.16 S., R.10 W., heretofore described, bears East; 3.34 chs. dist.

Land, S. 55.60 chs., gently rolling; remainder of mile

.SUBDIVISION OF T.17 S., R.10 W.

Chains

rolling hilly land: General southeasterly exposure and drainage on entire mile.

Soil, shallow clay and sandy loam, mixed with rock and gravel; 3rd and 4th rate.

Undergrowth, shadscale, bud sage, and mountain rush.

No timber.

Poor grazing land.

From the cor. of secs. 27, 28, 32, and 34.

West, on random line, bet. secs. 28 and 33.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

40.00 Set temp. cor. of secs. 28, 29, 32, and 33.

Thence:

S.0°03'E., on random line bet. secs. 32 and 33.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

30.00 Set temp. lot cor.

39.68 Intersect the S. boundary of the township, 6 lks. E. of cor. of secs. 4, 5, 32, and 33, heretofore described.

Thence:


From the cor. of secs 4, 5, 32, and 33.

N.0°03'W., on true line bet. secs. 32 and 33.

Over nearly level land, through medium dense shadscale and yellow top undergrowth.

9.68 Southing of 80.00 chs. from the cor. of secs. 28, 29, 32, and 33.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground for cor. of lots 1 and 8, sec. 33 and lots 4 and 5, sec. 32, with brass cap marked



1954

of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor. raise a mound

Cor. stands on nearly level land.

21.70 Begin gradual ascent over S. slope of bench, bears SE. and NW.

32.00 Top of SW. edge of nearly level bench, 25 ft. high, thence over nearly level bench land.


46.50 N. edge of bench, bears S.60°E. and N.60°W.; descend gradual N. slope.

7. SURVEYOR'S CORRECTION TO THE 10 W.

Chains
49.68

Southing of 40.00 chs. from the cor. of secs. 28, 29, 32, and 33.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor. secs. 32 and 33, with brass cap marked




raise a mound of stone, 3 $\frac{1}{2}$ ft. base, 2 $\frac{1}{2}$ ft. high, W. of cor.

Cor. stands at base of descent, 20 ft. below bench, bears S.60°E. and N.60°W.; thence over nearly level land.

74.60 Old road, bears SE. and NW.

89.68 Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for cor. of secs. 27, 29, 32, and 34, with brass cap marked



raise a mound of stone, 2 ft. base, 1 ft. high, W. of cor.

Cor. stands on nearly level land.

Land, nearly level on N. and S. portions; nearly level bench on central portion.

Soil, deep clay and sandy loam, lined with fine gravel; 2nd rate.

Undergrowth, shadscale and yellow top.

No timber.


Poor grazing land.

From the cor. of secs. 27, 28, 33, and 34.

West, on a sectional correction line bet. secs. 28 and 33.

Over nearly level land, through medium dense shadscale and yellow top undergrowth.

40.03 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked



raise a mound

SUBDIVISION OF T.17 S1, R10 W.

Chains

of stone, 2 ft. base, 1½ ft. high, N. of sec. 28, and
 Cor. stands on nearly level land.

80.06

The cor. of secs. 28, 29, 32, and 33, nearly level with ¼ sec. cor.
 Land, nearly level, with slight southeasterly exposure and drainage.
 Soil, deep clay, with patches of fine gravel and rock; 3rd rate.
 Undergrowth, shadscale and yellow top.
 No timber.
 Poor grazing land.


N.0°03'W., bet. secs. 28 and 29.
 Over gently rolling land, through scattered shadscale undergrowth.

31.70

Center of improved State Highway, bears N.79°E. to Delta, Utah, and S.79°W. to Ely, Nevada.

40.00

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for ¼ sec. cor., with brass cap marked




raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.
 Cor. stands on gently rolling land, nearly level with sec. cor.

46.00

Wash, 10 ft. wide, 1½ ft. deep, drains SE.

40.00

Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 20, 21, 28, and 29, with brass cap marked



raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.
 Cor. stands on gently rolling land, nearly level with ¼ sec. cor.
 Land, gently rolling, with general southeasterly exposure and drainage.
 Soil, deep clay, with scattered patches of volcanic rock and gravel; 2nd and 3rd rate.

Chains

Undergrowth, medium dense shadscale.

No timber.

Poor grazing land.

East, on random line bet. secs. 21 and 28.

40.00 Set temp. $\frac{1}{4}$ sec. cor.


80.04 Intersect N. and S. line, 4 lks. N. of cor. of secs. 21, 22, 27, and 28.

Thence:

N. 89° 58' W., on true line bet. secs. 21 and 28.

Over gently rolling land, through medium dense shadscale undergrowth.

40.02 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked



1934

raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor.

Cor. stands on gently rolling land, nearly level with sec. cor.

80.04 The cor. of secs. 20, 21, 28, and 29, nearly level with $\frac{1}{4}$ sec. cor.

Land, gently rolling, with slight southeasterly exposure and drainage.

Soil, deep clay and sandy loam, fixed with patches of rock and gravel; 2nd and 3rd rate.

Undergrowth, medium dense shadscale.

No timber.

Poor grazing land.

N. 0° 03' W., bet. secs. 20 and 21.

Over gently rolling land, through medium dense shadscale and yellow top undergrowth.

18.20 Old road, bears E. and W.

32.00 Begin gradual ascent over gentle S. slope, bears E. and W.

36.40 Top of low bench, bears E. and W.; descend gradual N. slope.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked

SUBDIVISION OF SECTION 21

Chains

S 20 | S 21

1934

raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Cor. stands at base of descent, bears E. and W.; thence over gently rolling land.

0.00

Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, for cor. of secs. 16, 17, 20, and 21, with brass cap marked

T 17 S	R 10 W
S 17	S 16
S 20	S 21

1934

raise a mound of stone, 3 1/2 ft. base, 2 1/2 ft. high, W. of cor.

Cor. stands on gently rolling land, nearly level with 1/4 sec. cor.

Land, nearly level, with slight southerly and easterly exposure and drainage.

Soil, deep sandy loam, mixed with fine gravel; 2nd rate.

Undergrowth, shadscale and yellow top.

no timber.

poor grazing land.

S. 89° 58' E., on random line bet. secs. 16 and 21.

40.00 Set temp. 1/4 sec. cor.

40.00 Intersect N. and S. line, 5 lns. S. of cor. of secs. 15, 16, 21, and 22.

Thence:

West, on true line bet. secs. 16 and 21.

Over gently rolling land, through medium dense shadscale and yellow top undergrowth.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for 1/4 sec. cor., with brass cap marked

S 16

S 21

1934

raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.

Cor. stands on gently rolling land, nearly level with sec. cor.

SUBDIVISION OF T.17 S., R.10 W.

Chains

80.06

The cor. of secs. 16, 17, 20, and 21, nearly level with $\frac{1}{4}$ sec. cor.

Land, nearly level, with slight southeasterly exposure and drainage.

Soil, deep sandy loam, mixed with fine gravel; 3rd rate.

Undergrowth, shadscale and yellow top.

No timber.

Poor grazing land.

N.0°03'W., bet. secs. 16 and 17.

Over gently rolling land, through medium dense shrubs, greasewood, yellow top, bud sage, and mountain rush undergrowth.

40.00

Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$
 S 17 | S 16
 1934

raise a mound

of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.

Cor. stands on gently rolling land, nearly level with sec. cor.

80.00

Set an iron post, 3 ft. long, 2 ins. diam., 20 ins. in the ground, for cor. of secs. 8, 9, 16, and 17, with brass cap marked

T 17 S | R 10 W
 S 8 | S 9

 S 17 | S 16
 1934

/ raise a mound

of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.

Cor. stands on gently rolling land, nearly level with $\frac{1}{4}$ sec. cor.

Land, nearly level, with slight southeasterly exposure and drainage.

Soil, sand and clay, mixed with rock and gravel; 3rd rate.

Undergrowth, shadscale, greasewood, yellow top, bud sage, and mountain rush.

No timber.

Poor grazing land.

SUBDIVISION OF T.17S., R.10 W.

Chains

East, on random line bet. secs. 9 and 16, 40.00

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.04 Intersect N. and S. line, at the cor. of secs. 9, 10, 16 and 16.


Thence:

West, on true line bet. secs. 9 and 16.

Over gently rolling land, through medium dense bud sage, shadscale, and mountain rush undergrowth.

26.60 Wash, 20 lbs. wide, 3 ft. deep, drains SE.

40.02 Set an iron post, 3 ft. long, 1 in diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked



1934

raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, N. of cor.

Cor. stands on gently rolling land, nearly level with sec. cor.

15.10 Wash, 20 lbs. wide, 2 ft. deep, drains SE.

80.04 The cor. of secs. 8, 9, 16, and 17, nearly level with $\frac{1}{4}$ sec. cor.

Land, gently rolling, with general southeasterly exposure and drainage.

Soil, deep sand and clay, mixed with small rock and gravel, 3rd rate.

Undergrowth, bud sage, shadscale, and mountain rush.

No timber.


Poor grazing land.

N.0°00'W., bet. secs. 8 and 9.

Over gently rolling land, through medium dense shadscale, creosewood, yellow top, and mountain rush undergrowth.

11.00 Wash, 20 lbs. wide, 3 ft. deep, drains S.25°E.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked



1934

of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor. / raise a mound

SUBDIVISION OF T. 17 S., R. 10 W.

Chains

Cor. stands on gently rolling land, nearly level with sep. cor.


40.50 Old road, bears E. and W.

46.20 Wash, 15 lks. wide, 3 ft. deep, drains SE.

50.60 Wash, 20 lks. wide, 4 ft. deep, drains SE.

54.60 Wash, 10 lks. wide, 2 ft. deep, drains SE.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 4, 5, 8, and 9, with brass cap marked



of stone, 2 ft. base, 1½ ft. high, raise a mound W. of cor.

Cor. stands on gently rolling land, nearly level with ¼ sec. cor.

Land, gently rolling, with general southeasterly exposure and drainage.

Soil, deep sand and clay, mixed with small rock and gravel; 3rd rate.

Undergrowth, shadscale, greasewood, yellow top, and mountain rush.

No timber.

Poor grazing land.

East, on random line bet. secs. 4 and 9.

40.00 Set temp. ¼ sec. cor.

80.02 Intersect N. and S. line, 12 lks. S. of cor. of secs. 3, 4, 9, and 10.

Thence:

S. 89°55' W., on true line bet. secs. 4 and 9.


Over gently rolling land, through medium dense shadscale, greasewood, and mountain rush undergrowth.

3.10 Wash, 15 lks. wide, 3 ft. deep, drains SE.

10.90 Wash, 20 lks. wide, 2 ft. deep, drains SE.

15.45 Wash, 50 lks. wide, 2 ft. deep, drains SE.

40.01 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for ¼ sec. cor., with brass cap marked



1934

SUBDIVISION OF T.17 S., R.10 W.

Chains

of stone, 2 ft. base, 1½ ft. high, N. of cor. raise a mound

Cor. stands on gently rolling land, nearly level with sec. cor.

50.60 Wash, 10 lks. wide, 2 ft. deep, drains SE.

55.90 Low rise, bears N. and projects S. about 4.00 chs. dist. to end.

65.30 Wash, 30 lks. wide, 2 ft. deep, drains SE.

80.02 The cor. of secs. 4, 5, 8, and 9, nearly level with ¼ sec. cor.

Land, gently rolling, with general southeasterly exposure and drainage.

Soil, deep sand and clay, mixed with rock and gravel; 3rd rate.

Undergrowth, shadscale, greasewood, and mountain rush.

No timber.

Poor grazing land.

N.0°03'W., on true line bet. secs. 4 and 5.

Over gently rolling land, through medium dense shadscale, greasewood, and mountain rush undergrowth.

11.60 Wash, 50 lks. wide, 5 ft. deep, drains SE., from N.; thence along bottom of wash.

15.30 Leave bottom of wash, which drains from NW.; thence ascend gradual S. slope.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for ¼ sec. cor., with brass cap marked

¼
S 5 | S 4
1934

of stone, 2 ft. base, 1½ ft. high, W. of cor. raise a mound

Cor. stands on gently rolling land on general S. slope, 15 ft. above sec. cor.

45.00 Begin gradual ascent over SE. slope of rolling hilly land, bears NE. and SW.


74.00 Spur, 35 ft. above ¼ sec. cor., projects NE. about 4.00 chs. dist.; descend general N. slope.

82.00 Head of wash, 10 lks. wide, 3 ft. deep, in draw, 45 ft. below spur, drains SE.; ascend gradual S. slope.

82.60 Intersect the N. boundary of the township.

Chains

Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for the closing cor. of secs. 4 and 5, T.17 S., R.10 W., with brass cap marked



1934

raise a mound of stone, 3 ft. base, 2 ft. high, S. of cor.

Cor. stands on gentle S. slope, 5 ft. above draw.

From point of intersection the cor. of secs. 32 and 33, T.16 S., R.10 W., heretofore described, bears East, 3.35 chs. dist.

Land, S. portion, gently rolling; N. portion low rolling hills. General southeasterly exposure and drainage on entire mile.

Soil, S. portion, sand and clay, mixed with fine gravel and patches of rock, 3rd rate; N. portion, shallow sand and clay, mixed with rock and gravel, 4th rate.

Undergrowth, shadscale, greasewood, and mountain rush.

No timber.

Poor grazing land.

From the cor. of secs. 28, 29, 32, and 33, heretofore described.

West, on random line bet. secs. 29 and 32.

40.00 Set temp. 1/4 sec. cor.

80.00 Set temp. cor. of secs. 29, 30, 31, and 32.

Thence:

S.0°03'E., on random line bet. secs. 31 and 32.

40.00 Set temp. 1/4 sec. cor..

80.00 Set temp. lot cor.

92.12 Intersect the S boundary of the township, at the cor. of secs. 5, 6, 31, and 32, heretofore described.

Thence:

From the cor. of secs. 5, 6, 31, and 32.


N.0°03'W., on true line bet. secs. 31 and 32.

Over gently rolling land, through medium dense shadscale and yellow top undergrowth.

12.12 Southing of 80.00 chs. from the cor. of secs. 29, 30, 31, and 32.

Chains

Set an iron post, 3 ft. long, 1 in diam., 30 ins. in the ground, for cor. of lots 11 and 12, sec. 31, and lots 1 and 8, sec. 32, with brass cap marked.




1934

raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Cor. stands on gently rolling land, nearly level with sec. cor.

52.12 Southing of 40.00 chs. from the cor. of secs. 29, 30, 31, and 32.

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for 1/4 sec. cor., with brass cap marked




1934

raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Cor. stands on gently rolling land, nearly level with lot cor.

92.12 Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, for cor. of secs. 29, 30, 31, and 32, with brass cap marked



1934

raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Land, gently rolling, with slight slight southerly exposure and drainage.

Soil, sand and clay, mixed with fine gravel and patches of rock; 2nd and 3rd rate.

Undergrowth, shadscale and yellow top.

No timber.

Poor grazing land.

From the cor. of secs. 28, 29, 32, and 33, heretofore described.

West, on a sectional correction line bet. secs. 29 and 32.

Over nearly level land, through medium dense shadscale

W. 1/4 SUBDIVISION OF T. 12 N., R. 10 W.

Chains

- 15.50 Old road, bears NW. and SE.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked
- $\frac{1}{4}$ S 29

 S 32
 1934
- 80.00 The cor. of secs. 29, 30, 31, and 32, nearly level with $\frac{1}{4}$ sec. cor.
- Land, nearly level, with slight southeasterly exposure and drainage.
- Soil, deep sand and clay, mixed with fine gravel and patches of rock; 2nd and 3rd rates.
- Undergrowth, shadscale and yellow top.
- No timber.
- Poor grazing land.
-
- West, on a sectional correction line bet. secs. 30 and 31.
- Over gently rolling land, through medium dense shadscale and yellow top undergrowth.
- 14.30 Swasey Wash, 35 lks. wide, 6 ft. deep, drains S.30°W., from N.40°W.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked
- $\frac{1}{4}$ S 30

 S 31
 1934
- 64.20 Center of improved State Highway, bears N.35°E. to Delta, Utah, and S.35°W. to Ely, Nevada.
- 71.00 Old road, bears N. and S.
- 80.00 Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for cor. of lots 7 and 8, sec. 30, and lots 1 and 2, sec. 31, with brass cap marked
- S30

 7 | 8

 2 | 1
 S31
 1934

SUBDIVISION OF T.17 S., R.10 W.


Chains

balance

of stone, 2 ft. base, 1½ ft. high, N. of cor. ^{raise a mound}

96.51 Intersect the W. boundary of the township.

Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for closing cor. of secs. 30 and 31, T.17 S., R.10 W., with brass cap marked

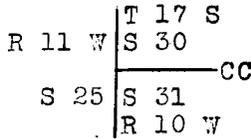

1934

of stone, 3 ft. base, 2 ft. high, E. of cor. ^{raise a mound}

From this point, the cor. of secs. 25 and 36, T.17 S., R.11 W., heretofore described, bears South, 15.17 chs. dist.

Land, gently rolling, with general southerly exposure and drainage.

Soil, deep sand and clay, mixed with fine gravel and scattered patches of rock; 2nd and 3rd rates.

Undergrowth, shadscale, and yellow top.

No timber.

Poor grazing land.

From the cor. of secs. 29, 30, 31, and 32,

N.0°03'W., bet. secs. 29 and 30.

Over gently rolling land, through medium dense shadscale and yellow top undergrowth.

10.00 Center of improved State Highway, bears N.79°E. to Delta, Utah, and S.79°W. to Ely Nevada.

30.00 Begin gradual ascent over gentle S. slope of bench, bears E. and W.


35.50 Top of S. rim of bench, 20 ft. high, bears E. and W.; thence over gently rolling land on top of bench.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for ¼ secs. cor., with brass cap marked

W. O. SUBDIVISION ON T. 17 S. R. 10 W.

Chains

68.50
 80.00
 1934
 raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor.
 Cor. stands on gently rolling top of bench, 20 ft. above sec. cor.



raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor.

Cor. stands on gently rolling land, nearly level with ¼ sec. cor.

Land, S. 35.50 chs., gently rolling; remainder of mile, gently rolling bench land. General southerly exposure and drainage.

Soil, S. portion, deep clay, 2nd rate; N. portion, sandy loam, mixed with fine gravel; 3rd rate.

Undergrowth, shadscale and yellow top.

No timber.

Poor grazing land.

East, on random line bet. secs. 20 and 29.

40.00 Set temp. ¼ sec. cor.


80.08 Intersect N. and S. line, 5 lks. N. of cor. of secs. 20, 21, 28, and 29.

Thence:

N. 89° 58' W., on true line bet. secs. 20 and 29.

Over gently rolling land, through medium dense shadscale and yellow top undergrowth.

40.04 Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for ¼ sec. cor., with brass cap marked



raise a mound

SUBDIVISION OF T.17 S.7 R.10 W.

Chains

of stone, 2½ ft. base, 1½ ft. high, N. of sec. 19 and 30.
 Cor. stands on gently rolling land, at base of ascent, bears N. and S.; ascend gradual E. slope of bench.

64.10 Top of E. rim of bench, 20 ft. above ¼ sec. cor., bears S.10°E. and N.10°W.; thence over rolling top of bench.

80.08 The cor. of secs. 19, 20, 29, and 30, 20 ft. above ¼ sec. cor.

Land, E. portion gently rolling; W. portion gently rolling top of bench.

Soil, deep clay and sandy loam, mixed with fine gravel; 2nd and 3rd rate.

Undergrowth, shadscale and yellow top.

No timber.

Poor grazing land.

West, on random-line bet. secs. 19 and 30.

40.00 Set temp. ¼ sec. cor.

80.00 Set temp. lot cor.

86.44 Intersect the W. boundary of the township, 6 lks. S. of cor. of secs. 19 and 30, T.17 S., R.10 W., heretofore described.

Thence:

S.89°58'W., on true line bet. secs. 19 and 30.

Over gently rolling land, through medium dense shadscale, yellow top, and mountain rush undergrowth.

1. 0 Small draw, 10 ft. deep, drains N.

3.00 Descend over gentle E. slope.

16.44 Point which is a westing of 80.00 chs. from the cor. of secs. 19, 20, 29, and 30.

Set an iron post, 3 ft. long, 1 in. diam., 24 ins. in the ground, with a volcanic stone, 8x6x6 ins., marked X, deposited at base, and in a mound of stone to top, far cor. of lots 7 and 8, sec. 19 and lots 1 and 2, sec. 30, with brass cap marked

S19
7 8
2 1
S30

1934'

Cor. stands on gently rolling land, nearly level with cor. of secs. 19 and 30.

24.40 Old road, bears N. and S.


Chains

51.30 Enter nearly level bottom of a wide draw, bears N.20°W. and S.20°E.

53.20 Swaley Wash, 70 lks. wide, 5 ft. deep, in wide draw, 20 ft. deep, drains S. 1.00 ch. dist., thence SE.

56.44 Point which is a westing of 40.00 chs. from the cor. of secs. 19, 20, 29, and 30.

Set an iron post, 3 ft. long; 1 in. diam.; 30 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked.



1934

raise a mound of stone, 2 $\frac{1}{2}$ ft. base, 1 $\frac{1}{2}$ ft. high, N. of cor.

Cor. stands at E. edge of bottom of draw, bears S.20°E. and N.20°W.; ascend gradual W. slope.

60.70 Top of W. rim of bench, 20 ft. above $\frac{1}{4}$ sec. cor., bears S.20°E. and N.20°W.; thence over gently rolling top of bench.

72.40 Wash, 50 lks. wide, 3 ft. deep, drains SE.

78.10 Old road, bears SE. and NW.

96.44 The cor. of secs. 19, 20, 29, and 30, 20 ft. above $\frac{1}{4}$ sec. cor.

Land, gently rolling bench land, with general southeasterly exposure and drainage.

Soil, sandy loam, mixed with fine gravel, with scattered patches of rock on surface; 2nd and 3rd rates.

Undergrowth, shadscale, yellow top, and mountain rush.

No timber.

Poor grazing land.

N.0°03'W., bet. secs. 19 and 20.

Over gently rolling land, through medium dense shadscale, greasewood, yellow top, and mountain rush undergrowth.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked



1934

SUBDIVISION OF T.17 S., R.10 W.

Chains

of stone, 2 ft. base, 1½ ft. high, W. of cor. raise a mound

Cor. stands on gently rolling land, nearly level with sec. cor.

45.30 Top of low rise, bears NW. and projects SE. about 2.00 chs. dist.

48.30 Old road, bears N.60°E. and S.60°W.

75.50 Wash, 8 lks. wide, 1½ ft. deep, drains SE.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 17, 18, 19, and 20, with brass cap marked

T 17 S	R 10 W
S 18	S 17
S 19	S 20

1934

of stone, 2 ft. base, 1½ ft. high, W. of cor. raise a mound

Cor. stands on gently rolling land, nearly level with ¼ sec. cor.

Land, gently rolling bench, with general southeasterly exposure and drainage.

Soil, deep clay and sand, mixed with fine gravel, with scattered patches of rock on surface; 2nd and 3rd rates.

Undergrowth, shadscale, greasewood, yellow top, and mountain rush.

No timber.

Poor grazing land.

S.89°58'E., on random line bet. secs. 17 and 20.

40.00 Set temp. ¼ sec. cor.

60.08 Intersect N. and S. line, 5 lks. S. of cor. of secs. 16, 17, 20, and 21.

Thence:

West, on true line bet. secs. 17 and 20.

Over gently rolling land, through medium dense shadscale, yellow top, mountain rush, and greasewood undergrowth.

32.40 Wash, 15 lks. wide, 2 ft. deep, drains SE.

40.04 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for ¼ sec. cor., with brass cap marked

¼	S 17
	S 20

1934

of stone, 2 ft. base, 1½ ft. high, N. of cor. raise a mound

SUBDIVISION OF T.17 S., R.10 W.

Chains

Cor. stands on gently rolling land, nearly level with sec. cor.

80.08

The cor. of secs. 17, 18, 19, and 20, nearly level with $\frac{1}{4}$ sec. cor.

Land, gently rolling, with general southeasterly exposure and drainage.

Soil, deep clay and sand, mixed with fine gravel; 2nd rate.

Undergrowth, shadscale, yellow top, mountain rush, and greasewood.

No timber.

Poor grazing land.

N.89°58'W., on random line bet. secs. 18 and 19.

40.00

Set temp. $\frac{1}{4}$ sec. cor.

80.00

Set temp. lot cor.

96.32

Intersect the W. boundary of the township, 2 lbs. N. of cor. of secs. 18 and 19, T.17 S., R.10 W., heretofore described.

Thence:


S.89°59'E., on true line bet. secs. 18 and 19.

Over gently rolling land, through medium dense shadscale, yellow top, and mountain rush undergrowth.

16.32

Point which is a westing of 80.00 chs. from the cor. of secs. 17, 18, 19, and 20.

Set an iron post, 3 ft. long, 1 in. diam., 24 ins. in the ground to solid rock, with a volcanic stone 2 1/2 ins., marked X, deposited at base, and in a mound of stone to top, for cor. of lots 7 and 8, sec. 18, and lots 1 and 2, sec. 19, with brass cap marked



Cor. stands on gently rolling land, nearly level with cor. of secs. 18 and 19.


41.70

Old road, bears SE. and NW.

56.32

Point which is a westing of 40.00 chs. from the cor. of secs. 17, 18, 19, and 20.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked



1934

SUBDIVISION OF T.17 S., R.10 W.

Chains

enland

of stone, 2½ ft. base, 1½ ft. high, N. of cor. raise a mound

Cor. stands on gently rolling land, nearly level with lot cor.

56.70 Old road, bears S.20°E. and N.20°W.

85.70 Wash, 20 lks. wide, 1 ft. deep, drains SE.

96.32 The cor. of secs. 17, 18, 19, and 20, nearly level with ¼ sec. cor.

Land, gently rolling, with general southeasterly exposure and drainage.

Soil, deep sand and clay, mixed with fine gravel, with scattered patches of rock on surface; 2nd and 3rd rate.

Undergrowth, shadscale, yellow top, and mountain rush.

No timber.


Poor grazing land.

N.0°03'W., bet. secs. 17 and 18.

Over gently rolling land, through medium dense shadscale, mountain rush, and greasewood undergrowth.

22.50 Top of low rise, bears W. and projects E. about 4.00 chs. dist.


40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for ¼ sec. cor., with brass cap marked



of stone, 2 ft. base, 1½ ft. high, W. of cor. raise a mound

Cor. stands on gently rolling land, nearly level with sec. cor.

30.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 7, 8, 17, and 18, with brass cap marked



of stone, 2 ft. base, 1½ ft. high, W. of cor. raise a mound

Cor. stands on gently rolling land, nearly level with ¼ sec. cor.

Land, gently rolling, with general southeasterly exposure and drainage.

SUBDIVISION OF T.17 S., R.10 W.

Chains

Soil, deep sand and clay, mixed with patches of rock and gravel; 2nd and 3rd rate.

Undergrowth, shadscale, mountain rush, and greasewood.

No timber.

Poor grazing land.

East, on random line bet. secs. 8 and 17.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.08 Intersect N. and S. line, 7 lks. S. of cor. of secs. 8, 9, 16, and 17.

Thence:

S.89°57'W., on true line bet. secs. 8 and 17.

Over gently rolling land, through medium dense shadscale, yellow top, and mountain rush undergrowth.

10.50 Top of flood plain about 16.00 chs. wide, slopes S.

40.04 Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked

$$\frac{1}{4} \frac{S 8^{\circ}}{S 17}$$

1934

raise a mound of stone, 2 $\frac{1}{2}$ ft. base, 1 $\frac{1}{2}$ ft. high, N. of cor.

Cor stands on gently rolling land, nearly level with sec. cor.

67.00 Wash, 20 lks. wide, 2 ft. deep, drains S.

80.08 The cor. of secs. 7, 8, 17, and 18, nearly level with $\frac{1}{4}$ sec. cor.

Land gently rolling, with general southerly exposure and drainage.

Soil, deep sand and clay, with patches of rock and gravel; 2nd and 3rd rate.

Undergrowth, shadscale, yellow top, and mountain rush.

No timber.

Poor grazing land.

N.89°59'W., on random line bet. secs. 7 and 18.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.00 Set temp. lot cor.

96.21 Intersect the W. boundary of the township, 6 lks. S. of

SUBDIVISION OF T.17 S., R.10 W.

Chains

cor. of secs. 7 and 18, T.17 S., R.10 W., hereafter described.

Thence:

S.89°57'E., on true line bet. secs. 7 and 18.


Over gently rolling land, through medium dense shadscale, yellow top, and mountain rush undergrowth.

5.00 Old road, bears NE. and SW.

8.20 Old road, bears S.60°E. and N.60°W.

16.21 Point which is a westing of 80.00 chs. from the cor. of secs. 7, 8, 17, and 18.

Set an iron post, 3 ft. long, 1 in diam., 28 ins. in the ground, for cor. of lots 7 and 8, sec. 7, and lots 1 and 2, sec. 18, with brass cap marked



1934

raise a mound of stone, 2½ ft. base, 1½ ft. high, N. of cor.

Cor. stands on gently rolling land, nearly level with cor. of secs. 7 and 18.

19.60 Wash, 30 lks. wide, 2 ft. deep, drains SE.


35.80 Old road, bears NE. and SW.

42.10 Wash, 70 lks. wide, 5 ft. deep, drains S.

47.90 Wash, 40 lks. wide, 3 ft. deep, drains S.

56.21 Point which is a westing of 40.00 chs. from the cor. of secs. 7, 8, 17, and 18.

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for ¼ sec. cor., with brass cap marked



1934

raise a mound of stone, 2½ ft. base, 1½ ft. high, N. of cor.

Cor. stands on gently rolling land, nearly level with lot cor.

96.21 The cor. of secs. 7, 8, 17, and 18, nearly level with ¼ sec. cor.

Land, gently rolling, with general southerly exposure and drainage.

Soil, deep sand and clay, mixed with patches of rock and gravel; 2nd and 3rd rate.

.W. OF R. SUBDIVISION OF T.17 S., R.10 W.

Chains

Undergrowth, shadscale, yellow top, and mountain rush.

No timber.


Poor grazing land.

N.0°03'W., bet. secs. 7 and 8.

Over gently rolling land, through medium dense shadscale, yellow top, and mountain rush undergrowth.

13.80 Wash, 25 lks. wide, 2 ft. deep, drains SE.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for 1/4 sec. cor., with brass cap marked




raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Cor. stands on gently rolling land, nearly level with sec. cor.

42.80 Old road, bears E. and W.

49.50 Wash, 40 lks. wide, 2 ft. deep, drains SE.

80.00 Set an iron post, 3 ft. long, 2 ins diam., 14 ins. in the ground to solid rock, with a volcanic stone 8x6x6 ins. marked X, deposited at base, and in a mound of stone to top, for cor. of secs. 5, 6, 7, and 8, with brass cap marked



Cor. stands on gently rolling land, nearly level with 1/4 sec. cor.

Land, gently rolling, with general southeasterly exposure and drainage.

Soil, shallow sand and clay, mixed with rock and gravel; 3rd rate.

Undergrowth, shadscale, yellow top, and mountain rush.

No timber.

Poor grazing land.

N.89°57'E., on random line bet. secs. 5 and 8.

40.00 Set temp. 1/4 sec. cor.

80.14 Intersect N. and S. line, 5 lks. N. of cor. of secs.


SUBDIVISION OF T.17 S., R.10 W.

Chains	
4, 5, 8, and 9.	<p>Thence: S.89°59'W., on true line bet. secs. 5 and 8. Over gently rolling land, through medium dense shadscale, yellow top, and mountain rush undergrowth.</p>
22.90	Wash, 1.00 ch. wide, 4 ft. deep, drains SE.
40.07	Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for 1/4 sec. cor., with brass cap marked
	$\begin{array}{r} 35 \\ \hline 8 \\ \hline 1934 \end{array}$
	<p>raise a mound of stone, 2 1/2 ft. base, 1 1/2 ft. high, N. of cor.</p>
	Cor. stands on gently rolling land, nearly level with sec. cor.
58.10	Wash, 30 lks. wide, 1 ft. deep, drains S.
68.10	Wash, 60 lks. wide, 2 ft. deep, drains SE.
80.14	The cor. of secs. 5, 6, 7, and 8, nearly level with 1/4 sec. cor.
	Land, gently rolling, with general southeasterly exposure and drainage.
	Soil, shallow and deep sand and clay, mixed with rock and gravel; 3rd rate.
	Undergrowth, shadscale, yellow top, and mountain rush.
	No timber.
	Poor grazing land.
	N.89°57'W., on random line bet. secs. 6 and 7.
40.00	Set temp. 1/4 sec. cor.
60.00	Set temp. lot cor.
96.12	Intersect the W. boundary of the township, 3 lks. S. of cor. of secs. 6 and 7, T.17 S., R.10 W., heretofore described.
	<p>Thence: S.89°56'E., on true line bet. secs. 6 and 7.</p>
	Over gently rolling land, through medium dense shadscale, yellow top, and mountain rush undergrowth.
0.60	Bend in wash, 20 lks. wide, 1 ft. deep, drains SE, from N.20°E.
16.12	Point which is a westing of 80.00 chs. from the cor. of secs. 5, 6, 7, and 8.

SUBDIVISION OF T.17 S., R.10 W.

Chains

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for cor. of lots 10 and 11 sec. 6, and lots 1 and 2, sec. 7, with brass cap marked



1924

raise a mound of stone, 2½ ft. base, 1½ ft. high, N. of cor.

Cor. stands on gently rolling land, nearly level with cor. of secs. 6 and 7.


21.10 Wash, 30 lks. wide, 2 ft. deep, drains SE,

32.10 Spur, 20 ft. high, projects S.

50.00 Wash, 30 lks. wide, 2 ft. deep, drains S.

56.12 Point which is a westing of 40 chs. from the cor. of secs. 5, 6, 7, and 8.

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for ¼ sec. cor., with brass cap marked



1934

raise a mound of stone, 2½ ft. base, 1½ ft. high, N. of cor.

Cor. stands on gently rolling land, nearly level with lot cor.

59.90 Wash, 90 lks. wide, 6 ft. deep, drains S.

64.10 Spur, 20 ft. high, projects S.

75.70 Wash, 20 lks. wide, 2 ft. deep, drains SE.

96.12 The cor. of sec. 5, 6, 7, and 8, nearly level with ¼ sec. cor.

Land, gently rolling, with general southerly exposure and drainage.

Soil, shallow and deep sand and clay, mixed with rock and gravel; 3rd rate.

Undergrowth, shadscale, yellow top, and mountain rush.

No timber.

Four grazing land.

N.0°03'W., on true line bet. secs. 5 and 6.

Over gently rolling land, through medium dense shadscale, yellow top, greasewood, and mountain rush.


SUBDIVISION OF T.17 S., R.10 W.

Chains
17.00

Wash, 60 lks. wide, 2 ft. deep, drains East

40.00

Set an iron post, 3 ft. long, 1 in. diam. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked




raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Cor. stands on gently rolling land, nearly level with sec. cor.

2.48 Intersect the N. boundary of the township.

Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for closing cor. of secs. 5 and 6, T.17 S., R.10 W., with brass cap marked

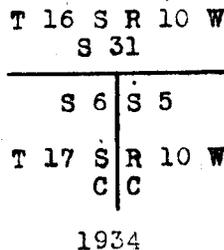

raise a mound of stone, 3 ft. base, 2 ft. high, S. of cor.

Cor. stands on gently rolling land, nearly level with sec. cor.

From point of intersection the cor. of secs. 31 and 32, T.16 S., R.10 W., heretofore described, bears East, 3.54 chs. dist.

land, gently rolling, with general southerly exposure and drainage.

Soil, shallow and deep sand and clay, mixed with rock and gravel; 3rd rate.

Undergrowth, shadeside, yellow top, greasewood, and brush.

No timber.

Poor grazing land.

GENERAL DESCRIPTION

The land within the boundaries of Township 17 South, Range 10 West, consists of gently rolling bench land in the northeasterly and westerly portions, nearly level land in central and southeasterly portions, and low rolling hilly land in the extreme north central portion, which is the south foothills of the Little Bear Mountains. The elevation above sea level ranges from about 4000 ft. in the southeast portion, to about 4500 ft. in the north central portion. The general appearance

07
GENERAL DESCRIPTION

throughout the township is southeasterly, and the slope is very gradual. The hilly land is rocky and of volcanic formation, with shallow surface soil, which is a sandy loam, mixed with rock and gravel, and may be classified as 4th rate. The soil in general on the northeasterly and westerly portions is deep sandy loam and clay, mixed with fine gravel and patches of volcanic rock, and may be classified as 2nd and 3rd rates. The soil in general on the central and southeasterly portions is a deep light clay, mixed with fine gravel and scattered patches of volcanic rock on surface, and may be classified as 2nd rate.

The vegetation throughout the township consists of a medium dense undergrowth of shadscale, greasewood, yellow top, bud sage, weeds, and grass, which affords from poor to fair grazing for stock during the winter months of the year.

The $\frac{1}{4}$ sec. cor. sec. 13, on the east boundary of the township, is located in a small clay flat.

Swasey Wash enters the west boundary of the township near the SW. cor. of sec. 13, and drains in an easterly and southerly direction through secs. 13, 30, and 31, leaving the township on the south boundary of sec. 31, near the cor. of secs. 5, 6, 31 and 32.

An improved State Highway, which bears in an easterly direction to Delta, Utah, enters the township near the SE. corner of sec. 24, and bears in a southwesterly direction to Ely, Nevada, leaving the township near the $\frac{1}{4}$ sec. cor. sec. 31, on the west boundary of sec. 31.

This is the only improved road in the township. Numerous other old roads, which are passable to automobiles, are found throughout the township.

There were no settlers living on the township at the time of the survey, and no land was under cultivation.

Parts of the easterly, central, and southerly portions of the township are suitable for farming, with the aid of irrigation, but no water is available for this land at the present time. No water was found on the township.

The township in general is suitable for the grazing of stock during the winter months of the year, and was being used for this purpose at the time of the survey. No trace of oil, oil shale, coal, or mineral was noted during the survey.

The mean magnetic declination throughout the township was found to be 16°15'E.

Blank

Page

FIELD ASSISTANTS.

NAMES.	CAPACITY.
W. Powelson; Fred L. Gadd Frank Kincaid; Kenneth Adams	Chainmen
Crosby; Rudolph Olsen E. Olsen; John Campbell	"
James G. Albertson; Brooks Anderson Ovid Austin; Jess Alger	Cornermen
Loyal Bennet; Leslie Blackburn Wills Brunson; Elroy Barnes	Flagmen
Evan Bringham; Jesse Bailey Ert Madsen	"
Andro Jeffery; Reuben W. Jones Aine Spendlove; Herbert Melville	Axmen
Eld Fox; T. A. Henrie Lalie Robinson; Leland Greenhalgh	"
t Stringham; Rex Iverson ughn Moody; Floyed Utley	"
ohn Towers; Ray Hall rwin Larsen; S. K. Memmott	"
rlin Hansen; Anker Peterson ed Hore; Rebello Schena	"
yle Newton; Melvin Shepard rl T. Harris; Owen Johnson	"
mer Kay; Douglas Cowan odore Howard; Bert Schneider	"
win Stratton; Donald Weierman y Lunt; Lawrence Earl	"
k Root; Thorin Holladay old Allen; Ernest Erickson	"
Grand Law; Robert E. Chappell y R. Morgan; J. Kenneth Flygare	"
liam A. Stanley; Paul R. Strebelt lace Young; Val Hicks	"

CERTIFICATE OF UNITED STATES

Andrew Nelson, U.S. Cadastral Engineer; and

We Sidney R. Reese, Don Madsen, Walter Byergo, Elmo Sager,

John C. Stewart, Transitmen (temporary) CWA, hereby certify upon notice that we have

of special instructions received from the District Cadastral Engineer for Utah

bearing date of the 13th day of December, 1933, we have well, faithfully, and truly

in our own proper person, and in strict conformity with said instructions, the Manual of Surveying Instruc-

tions, and the laws of the United States, surveyed all those parts or portions of dependent resurvey

of the east and south boundaries; survey of the north and west

boundaries and subdivision, completing the survey of T.17 S., R.10 W.

of the Salt Lake Meridian, in the State of Utah, which are represented in

the foregoing field notes as having been executed by us, and under our direction; and that all the corners of

said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instruc-

tions, and the special written instructions of the District Cadastral Engineer for Utah

and in the specific manner described in the field notes, and that the foregoing are the original field notes of such survey.

Certified to at Salt Lake City, Utah, February 21, 1935.

Andrew Nelson U.S. Cadastral Engineer

John C. Stewart

Don Madsen

Walter Byergo

Sidney R. Reese

Elmo Sager

APPROVAL

Transitmen (temporary) CWA. OFFICE OF U. S. SUPERVISOR OF SURVEYS,

Denver, Colorado, MAR 19, 1935.

The foregoing field notes of the survey of dependent resurvey of the east and south

boundaries; survey of the north and west boundaries and subdivision,

completing the survey of T.17 S., R.10 W.

Executed by Andrew Nelson, U.S. Cadastral Engineer.

Sidney R. Reese, Don Madsen, Walter Byergo, Elmo Sager

John C. Stewart, Transitmen (temporary) CWA.

Executed by their special instructions dated December 13, 1933,

under their special instructions dated December 13, 1933, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

Walter Byergo U. S. Supervisor of Surveys.

I certify that the foregoing transcript of the field notes of the above-described surveys in

has been correctly copied from the original notes on file in this office.

Blank

Page

Blank

Page

FIELD NOTES

OF THE SURVEY OF THE

INDEPENDENT RESURVEY OF THE THIRD STANDARD PARALLEL SOUTH,

ALONG THE SOUTH BOUNDARY OF TOWNSHIP 15 SOUTH, RANGE 10 WEST;

DEPENDENT RESURVEY OF THE EAST BOUNDARY

AND

SURVEY OF THE WEST BOUNDARY,

AND

SUBDIVISION OF

TOWNSHIP 15 SOUTH, RANGE 10 WEST.

Of the SALT LAKE Meridian,

In the State of UTAH

EXECUTED BY

Andrew Nelson, U.S. Cadastral Engineer

Sidney R. Reese, Transitman, (temporary) C.W.A.

Don Madsen, Transitman, (temporary) C.W.A.

Elmo Sager, Transitman, (temporary) C.W.A.

Under special instructions dated December 13, 1933, which provided

for the surveys included under Group No. 253, bearing the approval of the

Commissioner of the General Land Office under date of January 18, 1934

and assignment instructions dated December 15, 1933

Survey commenced January 18, 1934

Survey completed February 16, 1934

BOOK A-506

INDEX DIAGRAM.

Township 15 SOUTH, Range 10 WEST

26	80	79	65	64	52	51	42	41	34	33	3	10
	78		77		62		51		41		33	
25	76	75	61	60	50	49	40	39	32	31	3	9
	75		74		60		49		40		32	
24	73	72	59	58	48	47	39	38	31	30	2	8
	72		71		58		47		38		30	
23	70	69	57	55	46	45	37	36	30	29	2	6
	69		68		55		45		36		29	
22	67	66	54	54	44	43	36	35	29	28	2	5
	66		65		54		43		35		28	
20	64	63	53	53	43	43	34	34	27	26	2	3
20	18	17	16	16	14	14	13	13	12	12		

T. 15 S., R. 10 W., GROUP 253, UTAH

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

All lines in black were surveyed by Andrew Nelson,
U.S. Cadastral Engineer.

All lines in red were surveyed by Don Madsen,
Transitman, (temporary) C.W.A.

All lines in violet blue were surveyed by Elmo Sager,
Transitman, (temporary) C.W.A.

All lines in brown were surveyed by Sidney R. Reese,
Transitman, (temporary) C.W.A.

Blank

Page

W. OF R. DESCRIPTION AND TEST OF INSTRUMENTS, T. 15 S., R. 10 W.

Chains

DESCRIPTION AND TEST OF INSTRUMENTS

For Survey commenced January 18th, 1934, and executed with Buff and Buff light mountain transits Nos. 16725, 8028 and 9978, and Young and Sons light mountain transit No. 8517, used by Andrew Nelson, U.S. Cadastral Engineer, Sidney R. Reese, Don Madsen and Elmo Sager, Transitmen, (Temporary) respectively. Each instrument is equipped with Smith solar attachment and full vertical circle; the horizontal limb of each transit is provided with two double verniers, placed opposite to each other and reading to single minutes of arc, which is also the least count of the verniers of the latitude and declination arcs, and vertical circles. These instruments were approved for use on this survey by the district cadastral engineer for Utah, conditional upon satisfactory field tests as stated in assignment instructions dated Dec. 15, 1933. The instruments were in good condition at the time of this survey and all adjustments were in good order. All azimuths in this record are referred to true meridians determined by observations made upon Polaris during the progress of the survey, and the bearings are determined by deflection angles; the lines were carried forward by double fore and back sights.

The measurements were made with Lallie steel ribbon tapes, 5 chains and 8 chains in length; each tape is graduated every link for the first 100 links and thereafter at intervals of 10 links. The tapes were tested by comparison with a Lufkin steel standard tape and found correct. The measurements were made on the slope; the vertical angles were determined by clinometers in good adjustment, two to each tape; the field notes show the horizontal equivalents.

The data furnished with the special instructions gives the approximate geographic position of the southeast corner of T. 15 S., R. 10 W. as latitude 39° 28' N., longitude 112° 54' W.

December 21st, 1933, at the standard corner of T. 15 S., Rs. 9 and 10 W., in approximate latitude 39° 28' N., longitude 112° 54' W., at 3h 24m p.m. by my watch, which reads correct 105th meridian time as compared by a Western Union clock at Delta, Utah, December 20th 1933, I make an hour angle observation on Polaris, east of the meridian, two each with the telescope in direct and reversed positions, reading the horizontal deflection angle from Polaris, west to reference point, which is a well defined point on the sky line, about 20 miles distance to the north:

Watch fast of l.m.t. -----	31.6m
Local mean time of observation-----	2h 52.4m p.m.
Mean horizontal angle, Polaris to reference point-----	1° 16.2' W.
Azimuth of Polaris-----	1° 17.4' E.
True Bearing of reference point-----	N. 0° 01.2' E.

DEPENDENT RESURVEY OF THE EAST BOUNDARY OF TOWNSHIP 15 SOUTH, RANGE 10 WEST.

Reestablishment of the survey executed by Joseph Gorkinski, U.S. Deputy Surveyor, in 1874.

Random Lines

DEPENDENT RESURVEY OF THE EAST BDY. T. 15 S. R. 10 W.

Chains

From the standard cor. of T. 15 S., Rs. 9 and 10 W., hereinafter described. I turn $0^{\circ}01.2'$ to the left from reference point established by Polaris observation. Thence North, bet. secs. 31 and 36, along the E. bdy. of T. 15 S. R. 10 W.

39.98 Fall 7 lks. W. of the $\frac{1}{4}$ sec. cor. of secs. 31 and 36, hereinafter described.

The course of this half mile, therefore, is N. $0^{\circ}06'$ E., and the distance is 39.98 chs.

Continue on same line, with continuous measurement.

80.44 Fall 15 lks. W. of the cor. of secs. 25, 30, 31 and 36, hereinafter described.

The course of this half mile, therefore, is N. $0^{\circ}07'$ E., and the distance is 40.46 chs.

From a point 15 lks. W. of the cor. of secs. 25, 30, 31 and 36.

North, bet. secs. 25 and 30.

40.02 Fall 21 lks. W. of the $\frac{1}{4}$ sec. cor. of secs. 25 and 30, hereinafter described.

The course of this half mile, therefore, is N. $0^{\circ}05'$ E., and the distance is 40.02 chs.

Continue on same line, with continuous measurement.

80.16 Fall 24 lks. W. of the cor. of secs. 19, 24, 25 and 30, hereinafter described.

The course of this half mile, therefore, is N. $0^{\circ}03'$ E., and the distance is 40.14 chs.

From a point 24 lks. W. of the cor. of secs. 19, 24, 25 and 30.

North, bet. secs. 19 and 24.

40.16 Fall 36 lks. W. of the $\frac{1}{4}$ sec. cor. of secs. 19 and 24, hereinafter described.

The course of this half mile, therefore, is N. $0^{\circ}10'$ E., and the distance is 40.16 chs.

Continue on same line, with continuous measurement.

80.28 Fall 46 lks. W. of the cor. of secs. 13, 18, 19 and 24, hereinafter described.

The course of this half mile, therefore, is N. $0^{\circ}09'$ E., and the distance is 40.12 chs.

From a point 46 lks. W. of the cor. of secs. 13, 18, 19 and 24.

Chains

North, bet. secs. 13 and 18.

40.11 Fall 54 lks. W. of the $\frac{1}{4}$ sec. cor. of secs. 13 and 18, hereinafter described.

The course of this half mile, therefore, is N. 0°07' E., and the distance is 40.11 chs.

Continue on same line, with continuous measurement.

80.28 Fall 64 lks. W. of the cor. of secs. 7, 12, 13 and 18, hereinafter described.

The course of this half mile, therefore, is N. 0°09' E., and the distance is 40.17 chs.

From a point 64 lks. W. of the cor. of secs. 7, 12, 13 and 18.

North, bet. secs. 7 and 12.

40.19 Fall 71 lks. W. of the $\frac{1}{4}$ sec. cor. of secs. 7 and 12, hereinafter described.

The course of this half mile, therefore, is N. 0°06' E., and the distance is 40.19 chs.

Continue on same line, with continuous measurement.

80.43 Fall 78 lks. W. of the cor. of secs. 1, 6, 7 and 12, hereinafter described.

The course of this half mile, therefore, is N. 0°06' E., and the distance is 40.24 chs.

From a point 78 lks. W. of the cor. of secs. 1, 6, 7 and 12.

North, bet. secs. 1 and 6.

40.30 Fall 87 lks. W. of the $\frac{1}{4}$ sec. cor. of secs. 1 and 6, hereinafter described,

The course of this half mile, therefore, is N. 0°08' E., and the distance is 40.30 chs.

Continue on same line, with continuous measurement.

80.43 Fall 96 lks. W. of the cor. of Tps. 14 and 15 S., Rs. 9 and 10 W., hereinafter described.

The course of this half mile, therefore, is N. 0°08' E., and the distance is 40.13 chs.

True Lines

From the standard cor. of T. 15 S., Rs. 9 and 10 W., which is an iron post, 3 ins. diam., set, marked and witnessed as described in the official record of T. 16 S., R. 9 W., group No. 253.

DEPENDENT RESURVEY OF THE EAST BDY. T. 15 S., R. 10 W.

Chains

N. 0°06' E., on true line bet. secs. 31 and 36, along the E. bdy. T. 15 S., R. 10 W.

Over gently rolling land, through medium dense undergrowth

29.20 Ungraded road, bears N. 70° W. and S. 70° E.

35.00 Wash, 20 lks. wide, 3 ft. deep, drains N. 70° E.

39.98 The $\frac{1}{4}$ sec. cor. of secs. 31 and 36, which is a volcanic stone, 13x8x3 ins., lying on the ground, marked on one face; unwitnessed.

At point for cor.

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, with the original cor. monument deposited alongside, for $\frac{1}{4}$ sec. cor., with brass cap marked.

$\frac{1}{4}$
 S36 | S31

1934

of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor. raise a mound

Thence

N. 0°07' E., with continuous measurement.

43.50 Wash, 5 lks. wide, 2 ft. deep, drains N. 80° E.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, for cor. of secs. 25 and 36 only, with brass cap marked.

T15S | T15S
 S25 | R9W
 S36 | S31
 R10W

1934

of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor. raise a mound

80.44 The cor. of secs. 25, 30, 31 and 36, which is a juniper post, 3 ins. square, 40 ins. long, lying on the ground, marked 5 notches on one edge and 1 notch on the opposite edge; unwitnessed. This cor. is changed to refer to secs. 30 and 31 only.

At point for cor.

Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, with the original cor. monument deposited alongside for cor. of secs. 30 and 31 only, with brass cap marked.

T15S | T15S
 R10W | S30
 S25 | S31
 R9W

1934

of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, E. of cor. raise a mound

Land, gently rolling, with a general easterly exposure and drainage.

INDEPENDENT RESURVEY OF THE EAST BDY. T. 15 S., R. 10 W.

Chains

Soil, sly and gravel, with small pebbles on the surface, 3rd rate.

No timber.

Undergrowth, medium dense shadscale and greasewood.

Fair grazing land.

N. 0°05' E., along the W. bdy. of sec. 30.

Over gently rolling land, through medium dense undergrowth

37.40 Wash, 280 lks. wide, 1 ft. deep, drains S. 70° E.

39.56 Northing of 40.00 chs. from the cor. of secs. 25 and 36.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor. of sec. 25 only, with brass cap marked.

$\frac{1}{4}$
S25
1934

of stone, 3 ft. base, 3 ft. high, W. of cor. raise a mound

40.02 The $\frac{1}{4}$ sec. cor. of secs. 25 and 30, which is a quartzite stone, 18x6x4 ins., loosely set in the ground, marked $\frac{1}{4}$ on W. face; unwitnessed. This cor. is changed to refer to sec. 30 only.

At point for cor.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, with the original cor. monument deposited alongside, for $\frac{1}{4}$ sec. cor. of sec. 30 only, with brass cap marked.

$\frac{1}{4}$
S30
1934

of stone, 3 ft. base, 2 ft. high, E. of cor. raise a mound

Thence

N. 0°03' E., with continuous measurement.

43.50 Wash, 100 lks. wide, 1 ft. deep, drains E.

54.00 Wash, 25 lks. wide, 15 ft. deep, drains W. 75° E., approximately 2.00 chs. dist., thence SE.

79.56 Northing of 80.00 chs. from the cor. of secs. 25 and 36.

Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 24 and 25 only, with brass cap marked.

Chains

T15S	T15S	1103
S24	R9W	1103
S25	S30	
R10W		
	1934	

raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

80.16 The cor. of secs. 19, 24, 25 and 30, which is a volcanic stone, 16x8x4 ins., lying on the ground, marked 4 notches on one edge and 2 notches on the opposite edge; unwitnessed. This cor is changed to refer to secs. 19 and 30 only.

At point for cor.

Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, with the original cor. monument deposited alongside, for cor. of secs. 19 and 30 only, with brass cap marked.

T15S	T15S
R10W	S19
S24	S30
	R9W
	1934

raise a mound of stone, 3 ft. base, 2 ft. high, E. of cor.

Land, gently rolling, with a general easterly exposure, and drainage.

Soil, clay and gravel, with small pebbles on the surface, 3rd rate.

No timber.

Undergrowth, medium dense shadscale and greasewood.

Fair grazing land.

N. 0°10' E., along the W. bdy. of sec. 19.

Over very gently rolling land, through medium dense undergrowth.

39.40 Northing of 40.00 chs. from the cor. of secs. 24 and 25.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor. of sec. 24 only, with brass cap marked.

$\frac{1}{4}$		
S24		
	1934	

raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

40.16 The $\frac{1}{4}$ sec. cor. of secs. 19 and 24, which is a volcanic stone, 14x8x6 ins., firmly set in the ground, marked on W. face; unwitnessed. This cor. is changed to refer to sec. 19 only.

Chains

At point for cor.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, with the original cor. monument deposited alongside, for 1/4 sec. cor. of sec. 19 only, with brass cap marked.



raise a mound of stone, 3 ft. base, 2 ft. high, E. of cor.

Thence

N. 0°09' E., with continuous measurement.

52.40 Ungraded road, bears N. 60°E. and S. 60° W.

65.80 Wash, 10 lks. wide, 1 ft. deep, drains NW.

79.40 Northing of 80.00 chs. from the cor. of secs. 24 and 25.

Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 13 and 24 only, with brass cap marked.




raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

80.28 The cor. of secs. 13, 18, 19 and 24, which is a volcanic stone, 13x10x4 ins., firmly set in the ground, marked 3 notches on N. and S. edges; unwit. used. This cor. is changed to refer to secs. 18 and 19 only.

At point for cor.

Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, with the original cor. monument deposited alongside, for cor. of secs. 18 and 19 only, with brass cap marked.



raise a mound of stone, 2 ft. base, 1 1/2 ft. high, E. of cor.

Land, very gently rolling, with a general easterly exposure; drainage, northeasterly.

Soil, clay and gravel, with small pebbles on the surface, 3rd rate.

No timber.

Undergrowth, medium dense shadeleaf and greasewood.

Chains

Fair grazing land.

oriented

N. 0°07' E., along the W. bdy. of sec. 13

Over very gently rolling land, through medium dense undergrowth.

39.12 Northing of 40.00 chs. from the cor. of secs. 13 and 24.
Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor. of sec. 13 only, with brass cap marked.

$\frac{1}{4}$

S13

1934

raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

40.11 The $\frac{1}{4}$ sec. cor. of secs. 13 and 18, which is a volcanic stone, 12x10x6 ins., marked $\frac{1}{4}$ on one face, lying on the ground; unwitnessed. This cor. is changed to refer to sec. 18 only.

At point for cor.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with the original cor. monument deposited alongside, for $\frac{1}{4}$ sec. cor. of sec. 18 only, with brass cap marked.

$\frac{1}{4}$

S18

1934

raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, E. of cor.

Thence

N. 0°09' E., with continuous measurement.

79.12 Northing of 80.00 chs. from the cor. of secs. 13 and 24.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 12 and 13 only, with brass cap marked.

T15S	T15S
S12	R9W
S13	S18
R10W	


1934

raise a mound of stone and earth, 4 ft. base, 2 ft. high, W. of cor.

80.28 The cor. of secs. 7, 12, 13 and 18, which is a volcanic stone, 14x8x6 ins., marked 2 notches on the N. and 4 notches on the S. edges, loosely set in the ground, etc. unwitnessed. This cor. is changed to refer to secs. 7 and 18 only.

31.84

At point for cor.
Set an iron post, 3 ft. long, 2 in. diam., 27 ins. in the ground, with the original cor. monument deposited alongside, for cor. of secs. 7 and 18 only, with brass cap marked.



raise a mound of stone, 2 ft. base, 1 1/2 ft. high, E. of cor.

Land, very gently rolling.

Soil, clay loam, with the surface covered with gravel, 3rd rate.

No timber.

Undergrowth, medium dense shadscale and greasewood.


Fair grazing land.

N. 0°06' E., along the W. bdy of sec. 7.

Over gently rolling land, through medium dense undergrowth.

38.84 Northing of 40.00 chs. from the cor. of secs. 12 and 13.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/4 sec. cor. of sec. 12 only, with brass cap marked.




raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

40.19 The 1/4 sec. cor. of secs. 7 and 12, which is a volcanic stone, 13x8x5 ins., marked 1/4 on the W. face, loosely set in the ground; unwitnessed. This cor. is changed to refer to sec. 7 only.

At point for cor.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with the original cor. monument deposited alongside, for 1/4 sec. cor. of sec. 7 only, with brass cap marked.



raise a mound of stone, 2 ft. base, 1 1/2 ft. high, E. of cor.

DEPENDENT RESURVEY OF THE EAST BDY. T. 15 S., R. 10 W.

Chains

Thence

N. 0°08' E., with continuous measurement

78.84 Northing of 80.00 chs. from the cor. of secs. 12 and 13.

Set an iron post, 3 ft. long, 2 1/2 ins. diam., 27 ins. in the ground, with a volcanic stone, 6x5x4 ins., marked X, deposited at the base, for cor. of secs. 1 and 12 only, with brass cap marked.

T15S	T15S
S 1	R9W
S12	S 7
R10W	
1934	

raise a mound of stone and earth, 4 ft. base, 2 ft. high, W. of cor.

80.43 The cor. of secs. 1, 6, 7 and 12, which is a volcanic stone, 13x8x6 ins., marked 5 notches on S. and 1 notch on N. edges, loosely set in the ground; unwitnessed. This cor. is changed to refer to secs. 6 and 7 only.

At point for cor.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, with the original cor. monument deposited alongside, for cor. of secs. 6 and 7 only, with brass cap marked.

T15S	T15S
R10W	S 6
S 1	S 7
	R9W
1934	

raise a mound of stone and earth, 4 ft. base, 2 ft. high, E. of cor.

Land, gently rolling.

Soil, clay loam, with the surface covered with gravel, 3rd rate.

No timber.

Undergrowth, medium dense shadscale and greasewood.

Fair grazing land.

N. 0°08' E., along the W. bdy. of sec. 6.

Over gently rolling land, through medium dense undergrowth

30.10 Wash, 15 lks. wide, 8 ft. deep, drains S. 70° E.

38.41 Northing of 40.00 chs. from the cor. of secs. 1 and 12.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, with a volcanic stone, 7x5x4 ins., marked X, deposited at the base, for 1/4 sec. cor. of sec. 1 only, with brass cap marked.

DEPENDENT RESERVE OF THE EAST BDT. T. 15 S., R. 10 W.

Chains

W. of cor. raise a mound
 of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

80.50. The cor. of Tps. 14 and 15 S., Rs. 9 and 10 W., which is a juniper post, 3 ins. square, 4 ft. long, very dim scribe marks on one face, lying on the ground; unwitnessed. This cor. is changed to refer to sec. 6 only.

At point for cor.
 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, with the original cor. monument set alongside, for 1/2 sec. cor. of sec. 6 only, with brass cap marked.

S 6

1934

raise a mound of stone, 2 ft. base, 1 1/2 ft. high, E. of cor.

Thence

Continue on same line, with continuous measurement.

80.43 The cor. of Tps. 14 and 15 S., Rs. 9 and 10 W., which is a rotted juniper post, very dim scribe marks on two edges, lying on the ground; unwitnessed.

At point for cor.

Set an iron post, 3 ft. long, 3 ins. diam., 28 ins. in the ground, with the original cor. monument set alongside, for cor. of Tps. 14 and 15 S., Rs. 9 and 10 W., with brass cap marked.

T14S
 R10W | R9W
 S36 | S31

 S 1 | S 6
 T15S
 1934

raise a mound of stone, 3 ft. base, 3 ft. high, S. of cor.

Land, gently rolling.

Soil, heavy, gray clay, with a gravelly surface, 3rd rate.

No timber.

Undergrowth, medium dense shadscale and greasewood.

Fair grazing land.

From this Tps. cor. the Juab and Millard County line post, bears E., 1 1/2 in. dist., which is an iron post, 2 ins. diam., 18 ins. above ground, firmly set, with brass cap marked.

Juab
 Millard

was to

INDEPENDENT RESURVEY

3RD STAN. PAR. S., S. BDX. T. 15 S., R. 10 W.

Chains

INDEPENDENT RESURVEY OF THE THIRD STANDARD PARALLEL SOUTH, ALONG THE SOUTH BOUNDARY OF T. 15 S., R. 10 W. Independent resurvey Superseding the survey executed by Joseph Gorlinski, U.S. Deputy Surveyor, in 1880.

From the standard cor. of T. 15 S., Rs. 9 and 10 W., as described in the field notes of the survey of T. 16 S., R. 9 West, with the establishment of the third standard parallel south, along the S. bdy. of sec. 36, T. 15 S., R. 10 W., on transit-line describing the tangent.

Over gently rolling land, with a gravelly surface, through medium dense undergrowth; ascend a gradual E. slope.

12.20 The closing corner of T. 16 S. Rs. 9 and 10 W., described in the field notes of the survey of T. 16 S., R. 9 W.

32.00 Enter rocky surface, bears N. and S.

40.00 On a gradual E. slope, 50 ft. above sec. cor.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for standard $\frac{1}{4}$ sec. cor., with brass cap marked.

SC
 $\frac{1}{4}$ S36

1934

of stone, 2 $\frac{1}{2}$ ft. base, 2 ft. high, N. of cor. raise a mound

From this $\frac{1}{4}$ sec. cor. the original standard $\frac{1}{4}$ sec. cor. of sec. 36, bears S. 6°45' W., 48 lks. dist., which is a volcanic stone, 16x9x4 ins., marked $\frac{1}{4}$ on the N. face, firmly set in the ground; unwitnessed. I mark this cor. W.P. on the S. face for witness point.

52.11 Midpoint bet. the closing corners of secs. 1 and 6. and 1 and 2, T. 16 S., R. 10 W.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor. of sec. 1 only, with brass cap marked.

$\frac{1}{2}$ S 1

1934

of stone, 3 ft. base, 3 ft. high, S. of cor. raise a mound

70.10 Old road, bears NE. and SW.

80.00 North 1 lk. from the tangent.

On a gradual E. slope, 70 ft. above $\frac{1}{4}$ sec. cor.

Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for standard cor. of secs. 35 and 36, with brass cap marked.

S C

T15S. R10W
S35 S36

1934

of stone, 2 $\frac{1}{2}$ ft. base, 2 ft. high, N. of cor. raise a mound

W. OF 3RD STAN. PAR. S., S. BDY. T. 15 S., R. 10 W.

Chains

Land, gently rolling.
Soil, sandy clay loam, with a gravelly surface, and with rocks on the surface on the W. 48.00 chs., 3rd rate.

No timber.

Undergrowth, medium dense shadscale and greasewood.

Fair grazing land.

From this standard sec. cor. the original standard sec. cor. of secs. 35 and 36, brs. S. 9° W. 80 lks. dist., which is a volcanic stone, 13x9x5 ins., marked 1 notch on the E. and 5 notches on the W. edges, firmly set in the ground; unwitnessed. I mark this cor. W.P. on the S. face for witness point.

From a point 1 lk. S. of the stan. cor. of secs. 35 and 36. West, along the S. bdy. of sec. 35, on transit line describing the tangent, which bears S. 89° 59.3' W.

Over gently rolling land, with a gravelly and rocky surface, through medium dense undergrowth; ascend a gradual E. slope.

4.60 Wash, 200 lks. wide, 8 ft. deep, drains NE.

12.02 North 1 lk. from the tangent.

The closing corner of secs. 1 and 2, described in the field notes of the survey of T. 16 S., R. 10 W.

40.00 North 2 lks. from the tangent.

On a gradual E. slope, 50 ft. above standard sec. cor.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for standard $\frac{1}{2}$ sec. cor., with brass cap marked.

SC
1835

.1934

raise a mound of stone, 3 ft. base, 2 $\frac{1}{2}$ ft. high, N. of cor.

From this standard $\frac{1}{2}$ sec. cor. the original standard $\frac{1}{2}$ sec. cor. of sec. 35, bears S. 4° 20' W., 85 lks. dist., which is a volcanic stone, 20x12x3 ins., marked $\frac{1}{2}$ on one face, lying on the ground; unwitnessed. This cor. monument is moved and deposited alongside of the iron post.

44.50 Ungraded road, bet. Joy and Delta, Utah, bears N. 60° W. and S. 60° E.

48.50 Bend in wash, 20 lks. wide, 4 ft. deep, drains S. 70° E. from S. 80° W.

52.065 Mid-point bet. the closing corners of secs. 1 and 2, and 2 and 3, T. 16 S., R. 10 W., point for $\frac{1}{2}$ sec. cor. of sec. 2, falls in bend in wash, 70 lks. wide, 4 ft. deep, which drains S. 80° E. from S. 70° W., it is impracticable to set cor. at this point.

58.06 North 2.5 lks. from the tangent.

INDEPENDENT RESURVEY

3RD STAN. PAR. S., S.BDY. T. 15 S., R. 10 W.

Chains

Set an iron post, 3 ft. long, 1 in. diam., 30 lbs. in the ground, for witness $\frac{1}{2}$ sec. cor. of sec. 2, with brass cap marked.

$\frac{1}{2}$ S 2 W.C
1934

of stone, 3 ft. base, 2 ft. high, S. of cor. raise a mound

77.50 Small wash, drains SE.

80.00 North 3 lks. from the tangent.

On a gradual E. slope, 60 ft. above standard $\frac{1}{2}$ sec. cor.

Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for standard cor. of secs. 34 and 35, with brass cap marked.

SC
T15S | R10W
S34 | S35

1934

of stone, 3 ft. base, 2 ft. high, N. of cor. raise a mound

Land, gently rolling; drainage, easterly.

Soil, sandy clay loam, with a gravelly and rocky surface, 3rd rate.

No timber.

Undergrowth, medium dense shadscale and greasewood.

Fair grazing land.

From this standard sec. cor. the original standard sec. cor. of secs. 34 and 35, bears S. 11° W., 105 lks. dist., which is a volcanic stone, 12x8x8 ins., marked 2 notches on the E. and 4 notches on the W. edges, loosely set in the ground; unwitnessed. This cor. monument is moved and deposited alongside of the iron post.

From a point 3 lks. S. of the stan. cor. of secs. 34 and 35. West, along the S. bdy. of sec. 34, on transit line describing the tangent, which bears S. $89^{\circ}58.6'$ W.

Over gently rolling land, with a gravelly and rocky surface, through medium dense undergrowth; ascend a gradual E. slope.

12.11 North 3 lks. from the tangent.

The closing corner of secs. 2 and 3, described in the field notes of the survey of T. 16 S., R. 10 W.

27.60 Wash, 25 lks. wide, .3 ft. deep, drains S. 85° E.

39.50 Ungraded road, bears N. 90° W. and S. 80° E.

40.00 North 5 lks. from the tangent.

On a gradual E. slope, 50 ft. above standard sec. cor.

INDEPENDENT RESURVEY

3RD STAN. PAR. S., S: BDY. T: 15 S., R. 10 W.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for standard $\frac{1}{4}$ sec. cor., with brass cap marked.

1934

raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.

From this standard $\frac{1}{4}$ sec. cor. the original standard $\frac{1}{4}$ sec. cor. of sec. 34, bears S. 12° W., 122 lks. dist., which is a volcanic stone, 12x12x5 ins., marked $\frac{1}{4}$ on the N. face, loosely set in the ground; unwitnessed. This cor. monument is moved and deposited alongside of the iron post.

52.105 North 6 lks. from the tangent.

Mid-point bet. the closing corners of secs. 2 and 3, and 3 and 4, T. 16 S., R. 10 W.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor. of sec. 3, with brass cap marked.

$\frac{1}{4}$ S 3

1934

raise a mound of stone, 3 ft. base, 3 ft. high, S. of cor.

80.00 North 7 lks. from the tangent.

On a gradual E. slope, 60 ft. above standard $\frac{1}{4}$ sec. cor.

Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for standard cor. of secs. 33 and 34, with brass cap marked.

SC

T15S R10W
S33 | S34

1934

raise a mound of stone, 2 $\frac{1}{2}$ ft. base, 2 ft. high, N. of cor.

Land, gently rolling; drainage, easterly.

Soil, sandy clay loam, with a gravelly and rocky surface, 3rd rate.

No timber.

Undergrowth, medium dense shadscale and greasewood.

Fair grazing land.

From this standard sec. cor. the original standard sec. cor. of secs. 33 and 34, bears S. 13° W., 152 lks. dist., which is a volcanic stone, 16x10x9 ins., marked 3 notches on two edges, lying on the ground; unwitnessed. This cor. monument is moved and deposited alongside of the iron post.

INDEPENDENT RESURVEY

3RD STAN. PAR. S., S. EDY. T. 16 S., R. 10 W.

Chains From a point 7 lks. S. of the stan. cor. of secs. 3 and 4 West, along the S. edy. of sec. 33, on tangent line describing the tangent, which bears S. 89° 30' W.

Over rolling land, with a gravelly and rocky surface, through medium dense undergrowth; ascend a gradual E. slope.

12.10 North 8 lks. from the tangent.

The closing corner of secs. 3 and 4, described in the field notes of the survey of T. 16 S., R. 10 W.

30.10 Junction of two small draws, one from N. 30° W. and one from N. 85° W., 20 ft. deep, drains S. 30° E.

40.00 North 10 lks. from the tangent.

On a gradual E. slope, 50 ft. above standard sec. cor.

Set an iron post, 3 ft. long, 1 in. diam., 8 ins. in the ground, to solid rock, with a volcanic stone, 4x3x3 ins., marked X, deposited at the base, and in a mound of stone, 5 ft. base, to top, for standard 1/2 sec. cor., with brass cap marked.

SC
1/2 S33

1934

From this standard 1/2 sec. cor. the original standard 1/4 sec. cor. of sec. 33, bears S. 14° 30' W., 196 lks. dist., which is a volcanic stone, 16x10x7 ins., marked 1/4 on one face, lying on the ground; witnessed by a small mound of stone N. This cor. monument is moved and deposited alongside of the iron post.

52.03 North 12 lks. from the tangent.

Mid-point bet. the closing corners of secs. 3 and 4, and 4 and 5, T. 16 S., R. 10 W.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for 1/4 sec. cor. of sec. 4, with brass cap marked.

1/4 S 4
1934

of stone, .3 ft. base, 2 ft. high, S. of cor. raise a mound

54.20 Wash, 20 lks. wide, 4 ft. deep, drains S. 75° E.

61.50 Wash, 200 lks. wide, 15 ft. deep, drains S. 70° E.

80.00 North 13 lks. from the tangent.

On a gradual E. slope, 50 ft. above standard 1/2 sec. cor.

Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for standard cor. of secs. 32 and 33, with brass cap marked.

SC
T158 R10W
S32 S33

1934

of stone, 4 ft. base, 2 ft. high, N. of cor. raise a mound

INDEPENDENT RESURVEY

3RD STAN. PAR. S., S. BDY. T. 15 S., R. 10 W.

Chains

Land, rolling; drainage, southeasterly.

Soil, sandy clay loam, with a gravelly and rocky surface, 3rd rate.

No timber.

Undergrowth, medium dense shadscale and greasewood.

Fair grazing land.

From this standard sec. cor. the original standard sec. cor. of secs. 32 and 33, bears S. 15°30' W., 245 lks. dist., which is a volcanic stone, 14x11x8 ins., marked 4 notches on the E. and 2 notches on the W. edges, loosely set in the ground; unwitnessed. This cor. monument is moved and deposited alongside of the iron post.

From a point 13 lks. S. of the stan. cor. of secs. 32 and 33. West, along the S. bdy. of sec. 32, on transit line describing the tangent, which bears S. 89°57.2' W.

Over rolling land, with a gravelly and rocky surface, through medium dense undergrowth; ascend

5.40 Ungraded road, bears NW. and SE.

11.96 North 14 lks. from the tangent.

The closing corner of secs. 4 and 5, described in the field notes of the survey of T. 16 S., R. 10 W.

40.00 North 17 lks. from the tangent.

60 ft. above standard sec. cor.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for standard $\frac{1}{4}$ sec. cor., with brass cap marked.

SC
 $\frac{1}{4}$ S32

1934

raise a mound of stone, 3 ft. base, 2 $\frac{1}{2}$ ft. high, N. of cor.

From this standard $\frac{1}{4}$ sec. cor. the original standard $\frac{1}{2}$ sec. cor. of sec. 32, bears S. 17° W., 290 lks. dist., which is a volcanic stone, 12x10x3 ins., marked $\frac{1}{2}$ on one face, lying on the ground; unwitnessed. This cor. monument is moved and deposited alongside of the iron post.

51.94 North 18 lks. from the tangent.

Mid-point bet. the closing corners of secs. 4 and 5, and 5 and 6. T. 16 S., R. 10 W.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor. of sec. 5, with brass cap marked.

$\frac{1}{4}$ S 5

1934

raise a mound of stone, 3 ft. base, 3 ft. high, S. of cor.

INDEPENDENT RESURVEY

3RD STAN. PAR. S., S. BDY. T. 15 E., R. 10 W.

Chains
80.00

North 20 lks. from the tangent.

40 ft. above standard $\frac{1}{4}$ sec. cor.

Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for standard cor. of secs. 31 and 32, with brass cap marked.

SC	
T15S	R10W
S31	S32

1934

of stone, 4 ft. base, 3 ft. high, N. of cor. raise a mound

Land, rolling.

Soil, sandy clay loam, with a gravelly and rocky surface, 3rd rate.

No timber.

Undergrowth, medium dense shadscale, greasewood and mountainrush.

Fair grazing land.

From this standard sec. cor. the original standard sec. cor. of secs. 31 and 32, bears S. 16° W., 338 lks. dist., which is a volcanic stone, 14x12x8 ins., marked 5 notches on E. and 1 notch on W. edges, loosely set in a small mound of stone; unwitnessed. This cor. monument is moved and deposited alongside of the iron post.

From a point 20 lks. S. of the stan. cor. of secs. 31 and 32. West. along the S. bdy. of sec. 31, on transit line describing the tangent, which bears S. 89°56.5' W.

Over rolling land, with a gravelly and rocky surface, through medium dense undergrowth; ascend

11.92 North 21 lks. from the tangent.

The closing corner. of secs. 5 and 6, described in the field notes of the survey of T. 16 S., R. 10 W.

40.00 North 25 lks. from the tangent.

70 ft. above standard sec. cor.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for standard $\frac{1}{4}$ sec. cor., with brass cap marked.

SC	
$\frac{1}{4}$ S31	

1934

of stone, 3 ft. base, 2 ft. high, N. of cor. raise a mound

From this standard $\frac{1}{4}$ sec. cor. the original standard $\frac{1}{4}$ sec. cor. of sec. 31, bears S. 19°19' W., 239 lks. dist., which is a volcanic stone, 12x8x3 ins., marked $\frac{1}{4}$ on N. face, loosely set in the ground; unwitnessed. This cor. monument is moved and deposited alongside of the iron post

INDEPENDENT RESURVEY

OF 3RD STAN. PAR. S., S BDY. T. 15 S., R. 10 W.

Chains
81.00

North 26 lks. from the tangent.

Westing of 40.00 chs. from the closing corner of secs. 5 and 6.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor. of sec. 6 only, with brass cap marked.

$\frac{1}{2}$ S 6

1934

raise a mound of stone, 3 ft. base, 3 ft. high, S. of cor.

57.10 Wash, 15 lks. wide, 1 ft. deep, drains N.

62.10 Base of broken land, bears N. and S.; ascend along a N. slope.

66.50 Top of ascent on N. slope, 50 ft. above standard $\frac{1}{4}$ sec. cor., slopes N.; descend along a N. slope.

74.00 Old road, bears N. 30° E. and S. 30° W.

76.20 Wash, 15 lks. wide, 2 ft. deep, drains N. 20° E.

78.80 Old road, bears N. 20° W. and S. 20° E.

80.00 North 29 lks. from the tangent.

10 ft. below top of ascent.

Set an iron post, 3 ft. long, 3 ins. diam., 30 ins. in the ground, for standard cor. of Tp. 15 S., Rs. 10 and 11 W., with brass cap marked.

SC
T15S

R11W R10W
S36 S31

1934

raise a mound of stone, 4 ft. base, 2 $\frac{1}{2}$ ft. high, S. of cor.

Land, rolling; drainage, northerly.

Soil, sandy clay loam, with a gravelly and rocky surface, 3rd rate.

No timber.

Undergrowth, medium dense shadscale, greasewood and mountainrush.

Fair grazing land.

From this standard Tp. cor. the original standard Tp. cor. of Tp. 15 S., Rs. 10 and 11 W., bears S. 19°10' W., 408 lks. dist., which is a volcanic stone, 20x8x6 ins., marked 6 notches on the N., S., E. and W. edges, firmly set in the ground; unwitnessed. This cor. monument is moved and deposited alongside of the iron post.

From this standard Tp. cor., north point of high ridge, bears S. 2°40' W., approximately $\frac{1}{2}$ mile distance.

INDEPENDENT RESURVEY

3RD STAN. PAR. S., S. BDY. T. 15 S., R. 10 W.

Chains

A mound of stone on high point of ridge, bears S. 30° 58' W. approximately 1 mile distance.
 Peak in Little Drum Mountains, bears N. 56° 21' W., approximately 3 miles distance.
 High sharp peak, in the SW. $\frac{1}{4}$ of the SW. $\frac{1}{4}$ of sec. 9, T. 15 S., R. 10 W., bears N. 28° 15' E.

ESTABLISHMENT OF LOT CORNER OF SECTION 6, T. 16 S., R. 10 W.

At a point 11.92 chs. W. of the standard cor. of T. 15 S. Rs. 10 and 11 W., which is a westing of 80.00 chs. from the closing corner of secs. 5 and 6, T. 16 S., R. 10 W.

Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground to solid rock, with a volcanic stone, 18x16x16 ins. marked X, deposited at the base, and in a mound of stone, 6 ft. base, to top, for lot cor. of sec. 6, lots 4 and 5, with brass cap marked.

5 | 4
 S6
 1934

WEST BOUNDARY OF T. 15 S., R. 10 W.

From the standard cor. of T. 15 S., Rs. 10 and 11 W., heretofore described.

North, bet. secs. 31 and 36, along the W. bdy. of T. 15 S., R. 10 W.

Over rolling land, with a gravelly and rocky surface, through medium dense undergrowth;

- 2.50 Old road, bears N. 80° W. and S. 80° E.
- 3.50 Wash, 15 lks. wide, 1 ft. deep, drains E.
- 7.60 Wash, 20 lks. wide, 2 ft. deep, drains E.
- 9.80 Wash, 10 lks. wide, 1 ft. deep, drains S. 85° E.
- 10.60 Base of ascent, bears E. and W.; ascend a gradual S. slope
- 14.10 Top of low spur, 40 ft. above standard Tp. cor.; projects N. 80° E.; descend a gentle N. slope.
- 19.40 Wash, 10 lks. wide, 2 ft. deep, drains NE.; also old road, bears NE. and SW.
- 30.30 Small wash, drains S. 60° E.; also old road, bears N. 60° W. and S. 60° E.
- 31.30 Wash, 20 lks. wide, 2 ft. deep, drains S. 60° E.
- 36.45 Old road, bears N. 20° E. and S. 20° W.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked.


S36 | S31
 1934

WEST BOUNDARY OF T. 18 S., R. 10 W.

Chains

- 40.70 Old road, bears N. 20° W. and S. 20° E.
- 43.50 Wash, 30 lks. wide, 2 ft. deep, drains S. 80° E.
- 50.00 Small swale near head, drains S. 85° E.
- 60.90 Old road, bears NE. and SW.
- 64.40 Wash, 5 lks. wide, 1 ft. deep, drains S. 60° E.
- 73.90 Old road, bears NW. and SE.
- 76.80 Wash, 20 lks. wide, 1 ft. deep, drains S. 60° E.; ascend a gradual SW. slope.
- 80.00 On a gradual SW. slope, 40 ft. above 1/2 sec. cor.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 25, 30, 31 and 36, with brass cap marked



of stone, 4 ft. base, 3 ft. high, W. of cor. raise a mound

Land, rolling, with the surface broken by draws and spurs; drainage, easterly.

Soil, sandy clay loam, with a gravelly and rocky surface, 3rd rate.

No timber.

Undergrowth, medium dense shadscale and greasewood.

Fair grazing land.

January 22, 1934, at this sec. cor., in approximate latitude 39°29'N., longitude 113°01'W.: at 12h 18m53s p.m. by my watch, which is 2m 40s fast of local mean time, I make an hour angle observation on Polaris, east of the meridian, two each with the telescope in direct and reversed positions, reading the horizontal deflection angle from Polaris, west to a flag on line to the south, bet. secs. 31 and 36; about 60.00 chs. distance.

Watch fast of l.m.t.-----	34m 44s'
Local mean time of observation-----	11h 44m 09s a.m.
Mean horizontal angle, Polaris to reference point-----	181° 21'
Azimuth of Polaris-----	1° 21' E.
True bearing of reference flag-----	South

I make a meridian observation of the sun for time and latitude, observing simultaneously the altitude of the sun's lower limb and the transit of the sun's west limb, reversing the telescope and observing simultaneously the altitude of the sun's upper limb and the transit of the sun's east limb:

Mean observed altitude-----	39° 50' 30"
Reduced latitude-----	39° 29' 15" N.
Mean watch time of observation-----	12h 46m 26s p.m.
Watch fast of local mean time-----	34m 44s'

WEST BOUNDARY OF T. 15 S., R. 10 W.

Chains	North, bet. secs 25 and 30	section 1934
	Over rolling land, with a gravelly and rocky surface, through medium dense undergrowth; ascend a gradual SW. slope.	
12.80	Top of rise, 70 ft. above sec. cor., bears NW. and SE.; descend a gentle NE. slope.	
20.80	Wash, 5 lks. wide, 2 ft. deep, 10 ft. below rise, drains SE.; ascend a gentle E. slope.	
33.30	Top of ascent, 60 ft. above wash, slopes E.; descend a gentle E. slope.	
40.00	Small swale, 40 ft. below top of ascent, drains E. Set an iron post, 3 ft. long, 1 in. diam., 22 ins. in the ground to solid rock, and in a mound of stone to top, for $\frac{1}{2}$ sec. cor., with brass cap marked	
	S25 S30 1934	
	of stone, 4 ft. base, 3 ft. high, W. of cor. raise a mound	
44.50	Old road, bears N. 25° W. and S. 25° E.	
45.50	Old road, bears NW. and SE.	
48.50	Wash, 10 lks. wide, 2 ft. deep, drains S. 65° E.; ascend a gentle S. slope.	
53.90	Top of low rocky rise, 15 ft. above $\frac{1}{2}$ sec. cor., bears NE and S.; descend along a gentle E. slope.	
71.00	Small draw, 20 ft. below rise, drains NE; ascend a gentle S. slope. two lone junipers, bears E., about 2.00 chs. dist.	
74.70	Top of spur, 10 ft. above draw, projects N. 70° E.; descend W. slope.	
78.00	A main wash, 40 lks. wide, 1 ft. deep, in draw, 50 ft. below spur, drains N. 75° E. Road along bottom of draw, bears N. 75° E. and S. 75° W.; ascend 50 ft. to sec. cor.	
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 2 ins. in the ground to bedrock, with a volcanic stone, 4x3x3 ins., marked N, deposited at the base, and in a mound of stone, 6 ft. base, to top, for cor. of secs. 19, 24, 25 and 30, with brass cap marked	
	T15S R11W R10W S24 S19 S25 S30 1934	
	Land, rolling, with the surface broken by spurs and draws drainage, southeasterly on the S. portion of the mile, and easterly on the N. portion of the mile.	
	Soil, rocky, with sandy clay loam and gravel, 3rd rate.	
	No timber.	
	Undergrowth, medium dense shadscale and greasewood.	
	Fair grazing land.	

WEST BOUNDARY OF T. 15 S., R. 10 W.

Chains

North, bet. secs. 19 and 24.

Over rolling land, with a gravelly and rocky surface, through medium dense undergrowth; ascend.

2.40 Top of ascent, 15 ft. above sec. cor., slopes E.; descend.

11.10 Wash, 100 lks. wide, 2 ft. deep, in the bottom of a wide draw, 40 ft. below top of ascent, drains S. 75° E.; ascend a gentle S. slope.

17.00 Top of spur, 35 ft. above wash, projects S. 70° E.; descend a gentle NE. slope.

20.60 Small wash, 10 lks. wide, 1 ft. deep, 30 ft. below spur, drains E.

25.20 Leave rocky surface; enter small pebbles, bears E. and W.

36.70 Bottom of small swale, drains SE.; ascend a gentle SE. slope.

40.00 On a gentle SE. slope, 40 ft. above wash.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked.

$\frac{1}{4}$
S24 S19
1934

raise a mound of stone, 4 ft. base, 3 ft. high, W. of cor.

71.90 Ungraded road, bet. Joy and Delta, Utah, bears N. 40° W. and S. 40° E.

75.70 Bend in wash, 20 lks. wide, 2 ft. deep, drains S. 35° E. from N. 10° E.; base of mountains, bears NW. and SE.; ascend a steep SE. slope.

80.00 On a steep SE. slope, 90 ft. above $\frac{1}{4}$ sec. cor.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 13, 18, 19, and 24, with brass cap marked.

T15S
R11W R10W
S13 S18
S24 S19
1934

raise a mound of stone, 5 ft. base, 4 $\frac{1}{2}$ ft. high, W. of cor.

Land, rolling, broken by draws and spurs; drainage, easterly.

Soil, shallow sandy clay and gravel, with a rocky surface on the S. 25.00 chs., sandy loam and gravel, with small pebbles on the surface on the remainder of the mile, 3rd rate.

No timber.

Undergrowth, medium dense shadscale and greasewood.

Fair grazing land.

WEST BOUNDARY OF T. 15 S. R. 10 W.

Chains

North, bet. secs. 15 and 18.

Over mountainous land, through medium dense undergrowth, ascend gradually along a steep E. slope.

1.05 Ledge outcrops, bears W., 1.00 ch. dist.

20.90 Rocky spur, 130 ft. above sec. cor., projects E., descend a steep rocky NE. slope.

24.50 Small draw, 60 ft. below rocky spur, drains SE.; ascend a steep SE. slope.

32.80 Spur, 110 ft. above draw, projects S. 10° W. from N. 20° W., continue ascent along a SE. slope.

40.00 On a steep rocky SE. slope, 180 ft. above draw.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with a limestone, 6x6x4 ins., marked X, deposited alongside, for 1/2 sec. cor., with brass cap marked.

S13 | S18

1934

of stone, 2 1/2 ft. base, 2 1/2 ft. high, W. of cor., raise a mound

48.00 Small draw, 20 ft. deep, drains S. 35° E.; ascend along a gradual E. slope.

54.10 Enter scattered junipers, bears E. and W.

66.60 Spur, 110 ft. above 1/2 sec. cor., projects N. 30° W., descend a gradual NE. slope. A cabin bears N. 83° 41' E.

71.00 Old road in saddle, 40 ft. below spur, bears NW. and SE.; ascend a gradual SW. slope.

80.00 On a gradual SW. slope, 40 ft. above saddle.

Set an iron post, 3 ft. long, 2 ins. diam., 8 ins. in the ground to solid rock, with a limestone, 6x4x4 ins., marked X, deposited at the base, and in a mound of stone, 6 ft. base, to top, for cor. of secs. 7, 12, 15 and 18, with brass cap marked.

T15S

R11W R10W

S12 | S 7

S13 | S18

1934

from which

A scrub juniper, 10 ins. diam., bears N. 0° 50' E., 375 yds. dist., marked T 15 S R 10 W S 7 B.

A scrub juniper, 12 ins. diam., bears N. 0° 30' W., 150 yds. dist., marked T 15 S R 11 W S 12 B.

No other bearing trees available.

Land, mountainous; drainage, southeasterly.

Soil, shallow sandy loam, with a rocky surface.

WEST BOUNDARY OF T. 15 S., R. 10 W.

Chains

Timber, no timber on the S. 54.00 chs., scattered juniper on the balance of the mile.

Undergrowth, medium dense shadscale and greasewood.

Fair grazing land.

North, bet. secs. 7 and 12.

Over rolling mountainous land, through scattered timber, and medium dense undergrowth; ascend a gradual SW. slope, 130 ft. to $\frac{1}{4}$ sec. cor.

5.50 Low spur, projects SW.

14.10 Small draw, drains S. 80° W.

40.00 On a gradual SW. slope.

Set an iron post, 3 ft. long, 1 in. diam., 9 ins. in the ground to solid rock; and in a mound of stone, 5 ft. base, to top, for $\frac{1}{4}$ sec. cor., with brass cap marked.

S 12 | S 7

1934

from which
A scrub juniper, 6 ins. diam., bears S. 89°30' E., 182 lks. dist., marked $\frac{1}{4}$ S 7 B T.

A scrub juniper, 12 ins. diam., bears N. 44°45' W., 60 lks. dist., marked $\frac{1}{4}$ S 12 P T.

51.70 Small draw, drains N. 80° W.; also old road, bears N. 80° W. and S. 80° E.

59.00 Dim old road, bears NW. and SE.

70.00 Small draw, drains S. 60° W.

77.00 Low spur, projects SW.

80.00 On a gradual SW. slope, 110 ft. above $\frac{1}{4}$ sec. cor.

Set an iron post, 3 ft. long, 2 ins. diam., over X cut in solid rock, and in a mound of stone, 7 ft. base, to top, for cor. of secs. 1, 6, 7 and 12, with brass cap marked.

T15S
R11W R10W

S 1 | S 6

S 12 | S 7

1934

from which
A scrub juniper, 6 ins. diam., bears S. 24°30' E., 227 lks. dist., marked T 15 S R. 10 W S 7 B T.

No trees available in secs. 1, 6 and 12.

Land, rolling mountainous, drainage, northwesterly.

Soil, shallow sandy loam, with a rocky surface, 4th rate.

WEST BOUNDARY OF T. 15 S., R. 10 W.

Chains

Timber, scattered juniper.
Undergrowth, medium dense shadscale and grasses.
Fair grazing land.

North, bet. secs. 1 and 6.

Over rolling mountainous land, through scattered timber, and medium dense undergrowth; descend along a gradual W. slope.

- 5.40 Old mine shaft, bears W., 1.00 ch. dist.
- 7.40 Small draw, drains S. 40° W.
- 8.80 Wash, 15 lks. wide, 3 ft. deep, 60 ft. below sec. cor., drains SE.; ascend a steep rocky SW. slope.
- 12.20 Top of rocky outcrop, 100 ft. above wash, bears E. and W.; descend along a gradual W. slope.
- 18.70 Draw, 10 ft. below rocky outcrop, drains S. 20° W.; ascend a gradual W. slope.
- 26.70 Ungraded road, bears N. 15° E. and S. 15° W.
- 29.70 Bend in same road, bears NE. and SE.
- 40.00 On a gradual W. slope, 90 ft. above draw.

Set an iron post, 3 ft. long, 1 in. diam., 2 ins. in the ground to solid rock, and in a mound of stone, 5 ft. base, to top, for 1/2 sec. cor., with brass cap marked.

1/2
S 1 | S 6
1934

A juniper, 12 ins. diam., bears S. 7°15' E., 44 lks. dist. from which marked 1/2 S 6 B T.

A juniper, 7 ins. diam., bears S. 67°30' W., 126 lks. dist., marked 1/2 S 1 B T.

- 42.44 Intersect line 2-3, Survey No. 5901, Wounded Wolf Lode, at a point from which cor. No. 3, bears E. 55°07' E., 7.80 chs. dist., which is a pine post, 4 ins. square, 2 1/2 ft. above the ground, firmly set, marked and witnessed as described in the official record.
- 45.40 Ridge, 50 ft. above 1/2 sec. cor., bears S. 70° E. and W.; descend a gradual W. slope 95 ft. to Tp. cor.
- 51.25 Mine Hoist at the Copperhead Mine, bears N. 26°54' W.
- 52.30 Enter sagebrush, bears E. and W.
- 57.47 Intersect line 4-5, Survey No. 5901, Good Tender Lode, at a point from which cor. No. 4, bears S. 39°30' E., 2.24 chs. dist., which is a pine post, 4 ins. square, 2 ft. above the ground, firmly set, marked and witnessed as described in the official record.

WEST BOUNDARY OF T. 15 S., R. 10 W.

- Chains
 60.28 Intersect line 1-2, Survey No. 5901, Monte Cristo Lode, at a point from which cor. No. 2, bears N. 55°07' E., 1.266 chs. dist., which is a pine post, 4 ins. square, 2 ft. above the ground, firmly set, marked and witnessed as described in the official records.
- 62.55 Intersect line 2-3, Survey No. 5901, Monte Cristo Lode, at a point from which cor. No. 2, bears S. 33°51' E., 1.866 chs. dist., heretofore described.
- 67.30 Ungraded road, bears N. 60° W. and SE.
- 72.00 Old road, bears N. 30° W. and S. 30° E.
- 75.00 Wash, 5 lks. wide, 2 ft. deep, drains N. 10° E.
- 82.15 Intersect a line projected west from the cor. of Tps. 14 and 15 S., Rs. 9 and 10 W.
- Set an iron post, 3 ft. long, 3 ins. diam., 28 ins. in the ground, for cor. of Tps. 14 and 15 S., Rs. 10 and 11 W., with brass cap marked.

T14S
 R11W R10W
 S36 S31
 S 1 S 6
 T15S
 1934

of stone, 4 ft. base, 4 ft. high, S. of cor. raise a mound

Land, rolling mountainous; drainage, southwesterly on the S. portion, and northeasterly on the N. part of the mile.

Soil, sandy loam, with a rocky surface, 3rd rate.

Timber, scattered juniper.

Undergrowth, medium dense shadscale and greasewood throughout the mile, with scattered sagebrush on the N. portion of the mile.

Fair grazing land.

Note: For tie to U.S. Mineral Monument No. 2 see the field notes of the survey of T. 14 S., R. 11 W.

SUBDIVISION OF T. 15 S., R. 10 W.

From the standard cor. of secs. 35 and 36, on the S. bdy. of the Tp., heretofore described.

N. 0°06' E., bet. secs. 35 and 36, parallel to the mean course of the east boundary.

Over rolling land, through medium dense undergrowth.

4.30 Wash, 20 lks. wide, 2 ft. deep, drains E.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{2}$ sec. cor., with brass cap marked.

S35 S36
 1934

of stone, 3 ft. base, 3 ft. high, W. of cor. raise a mound

43.60 Small wash, drains E.

SUBDIVISION OF T. 15 S., R. 10 W.

Chains 52.80	Small wash, drains E.	89.00						
56.70	Small wash, drains E.							
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 25 ins. in the ground, for cor. of secs. 25, 26, 35 and 36, with brass cap marked.	83.38						
	<table border="1"> <tr> <td>T15S</td> <td>R10W</td> </tr> <tr> <td>S26</td> <td>S25</td> </tr> <tr> <td>S35</td> <td>S36</td> </tr> </table> 1934	T15S	R10W	S26	S25	S35	S36	83.70
T15S	R10W							
S26	S25							
S35	S36							
	of stone, 5 ft. base, 3 ft. high, W. of cor.	80.50						
	Land, rolling; drainage, easterly, surface broken by washes							
	Soil, sandy clay loam, 3rd rate.	81.38						
	No timber.							
	Undergrowth, medium dense shadscale and greasewood.							
	Fair grazing land.							
	East, on a random line bet. secs. 25 and 36.							
40.00	Set temp. $\frac{1}{4}$ sec. cor.							
79.98	Intersect E. bdy. of the Tp., 2 lks. N. of the cor. of secs. 25 and 36, heretofore described.							
	Thence							
	N. 89°59' W., on true line bet. secs. 25 and 36.							
	Over gently rolling land, through medium dense undergrowth.							
39.99	Set an iron post, 3 ft. long, 1 in. diam., 50 ins. in the ground, for $\frac{1}{2}$ sec. cor., with brass cap marked.							
	<table border="1"> <tr> <td>$\frac{1}{2}$ S25</td> </tr> <tr> <td>S36</td> </tr> </table> 1934	$\frac{1}{2}$ S25	S36					
$\frac{1}{2}$ S25								
S36								
	of stone, 3 ft. base, 3 ft. high, N. of cor.	80.50						
55.00	Wash, 30 lks. wide, 3 ft. deep, drains SE., thence along wash.							
65.00	Leave wash, drains E. from NW.							
79.98	The cor. of secs. 25, 26, 35 and 36.							
	Land, gently rolling; drainage, southeasterly.	85.4						
	Soil, sandy clay loam, 3rd rate.	86.08						
	No timber.							
	Undergrowth, medium dense shadscale and greasewood.							
	Fair grazing land.							

OF SUBDIVISION OF T. 15 S., R. 10 W.

Chains

N. 6°06' E., bet. secs. 25 and 26.
 Over gently rolling land, through medium dense undergrowth.

4.00 Wash, 50 lks. wide 3 ft. deep, drains E.

35.70 Head of small wash, drains N. 80° E.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked.

S26 | S25

1934

raise a mound of stone, 4 ft. base, 3 ft. high, W. of cor.

67.10 Wash, 2.00 chs. wide, 3 ft. deep, drains S. 70° E.

80.00 Set an iron post, 3 ft. long, 2 in. diam., 27 ins. in the ground, for cor. of secs. 23, 24, 25 and 26, with brass cap marked.

T15S	R10W
S23	S24
S26	S25

1934

raise a mound of stone, 4 ft. base, 3 ft. high, W. of cor.

Land, gently rolling; drainage, easterly.

Soil, sandy clay loam, 3 rd rate.

No timber.

Undergrowth, medium dense shadscale and greasewood.

Fair grazing land.

S. 89°59' E., on a random line bet. secs. 24 and 25.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

79.96 Intersect E. bdy. of the Tp., 2 lks. S. of the cor. of secs. 24 and 25, heretofore described.

Thence

West, on true line bet. secs. 24 and 25.

Over gently rolling land, through medium dense undergrowth.

39.98 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked.

S24

S25

1934


raise a mound of stone, 4 ft. base, 3 ft. high, W. of cor.

Chains
79.96

The cor. of secs. 23, 24, 25 and 26. N. 0°06' E.
Land, gently rolling. Soil, sandy clay loam, 3rd rate.
No timber. Undergrowth, medium dense shade and grasswood.
Fair grazing land.


N. 0°06' E., bet. secs. 23 and 24.

- 5.00 Wash, 30 lks. wide, 2 ft. deep, drains N. 70° E.
- 7.40 Wash, 30 lks. wide, 2 ft. deep, drains N. 80° E.; also old road, bears N. 80° E. and S. 80° W.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked.



of stone, 4 ft. base, 3 ft. high, W. of cor. raise a mound

- 53.80 Wash, 30 lks. wide, 2 ft. deep, drains N. 70° E.
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam.; 27 ins. in the ground, for cor. of secs. 13, 14, 23 and 24, with brass cap marked.



1934

of stone, 4 ft. base, 3 ft. high, W. of cor. raise a mound

Land, gently rolling; drainage, northeasterly.
Soil, sandy clay loam, 3rd rate.
No timber.
Undergrowth, medium dense shade and grasswood.
Fair grazing land.

- 40.00 Set an iron post, 3 ft. long, 2 ins. diam.; 27 ins. in the ground, for cor. of secs. 13 and 24.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.00 Intersect E. bdy. of ~~the~~ sp. at the cor. of secs. 13 and 24 heretofore described.

Chains

Thence, west, bearing 180° 00' 00", distance 100.00

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the

ground, for 1/4 sec. cor., with brass cap marked.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/4 sec. cor., with brass cap marked.

1/4 S13
S24

1934

raise a mound of stone, 3 ft. base, 3 ft. high, N. of cor.

56.10 Wash, 50 lks. wide, 4 ft. deep, drains N. 75° E.

80.00 The cor. of secs. 13, 14, 23 and 24.

Land, gently rolling; drainage, northeasterly.

Soil, sandy clay loam, with scattered rock on the surface, 3rd rate.

No timber.

Undergrowth, medium dense shadscale and greasewood.

Fair grazing land.

N. 0°06' E., bet. secs. 13 and 14.

Over gently rolling land, through medium dense undergrowth.

9.20 Wash, 20 lks. wide, 2 ft. deep, drains N. 80° E.

28.40 Wash, 20 lks. wide, 3 ft. deep, drains E.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for 1/4 sec. cor., with brass cap marked.

1/4
S14 | S13

1934

raise a mound of stone, 4 ft. base, 3 ft. high, W. of cor.

76.90 Wash, 30 lks. wide, 3 ft. deep, drains E.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, with a limestone, 12x12x6 ins., marked 4 notches on the S. and 1 notch on the E. edges, deposited alongside, for cor. of secs. 11, 12, 13 and 14, with brass cap marked.

T15S | R10W
S11 | S12
S14 | S13

1934

raise a mound of stone, 3 ft. base, 3 ft. high, W. of cor.

1934

SUBDIVISION OF T. 15 S., R. 10 W.

Chains

Land, gently rolling; drainage, easterly.

Soil, sandy clay loam, with scattered rocks on the surface, 3rd rate.

No timber.

Undergrowth, medium dense shadscale and greasewood.

Fair grazing land.

East, on a random line bet. secs. 12 and 13.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.08 Intersect E. bdy. of the Tp., 2 lks. S. of the cor. of secs. 12 and 13, heretofore described.

Thence

S. 89°59' W., on true line bet. secs. 12 and 13.

Over gently rolling land, through medium dense undergrowth

40.04 Set an iron post, 3 ft. long, 1 in. diam., 16 ins. in the ground to solid rock, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked.

$\frac{1}{4}$ S12

S13

1934

of stone, 3 ft. base, 2 ft. high, N. of cor. raise a mound

71.40 Small wash, drains NE.

80.08 The cor. of secs. 11, 12, 13 and 14.

Land, gently rolling; drainage, northeasterly.

Soil, sandy clay loam, 3rd rate.

No timber.

Undergrowth, medium dense shadscale and greasewood.

Fair grazing land.

N. 0°06' E., bet. secs. 11 and 12.

Over gently rolling land, with a gravelly surface, through medium dense undergrowth.

24.00 Wash, 20 lks. wide, 2 ft. deep, drains E., approximately 8.00 chs. dist., thence NE.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked.

$\frac{1}{4}$ S11

S12

1934

OF SUBDIVISION OF TOWNSHIP. 10 W.

Chains

37.40 Wash, 20 lks. wide, 10 ft. deep, drains N. raise a mound of stone, 3 ft. base, 2½ ft. high, W. of cor.

40.10 Small wash, drains E.

80.00 Set an iron post, 5 ft. long, 2 ins. diam., 30 ins. in the ground, with a quartzite stone, 14x10x8 ins., marked 5 notches on the S. and 1 notch on the E. edges, deposited alongside, for cor. of secs. 1, 2, 11 and 12, with brass cap marked.

T15S	R10W
S 2	S 1
S11	S12

1934

raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Land, gently rolling; drainage, easterly.

Soil, sandy clay loam, with a gravelly surface, 3rd rate.

No timber.

Undergrowth, medium dense shadscale and greasewood.

Fair grazing land.

N. 89°59' E., on a random line bet. secs. 1 and 12.

40.00 Set temp. ¼ sec. cor.

80.02 Intersect E. bdy. of the Tp., 5 lks. S. of the cor. of secs. 1 and 12, heretofore described.

Thence

S. 89°57' W., on true line bet. secs. 1 and 12.

Over gently rolling land, through medium dense undergrowth.

40.01 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for ¼ sec. cor., with brass cap marked.

¼ S 1
S12

1934

raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.

72.10 Wash, 20 lks. wide, 10 ft. deep, drains N.

80.02 The cor. of secs. 1, 2, 11 and 12, 10 ft. above ¼ sec. cor.

Land, gently rolling; drainage, northerly.

Soil, sandy clay loam, 3rd rate.

No timber.

Undergrowth, medium dense shadscale and greasewood.

SUBDIVISION OF T. 15 S., R. 10 W.

Chains

and 10

Fair grazing land.

N. 0°06' E., on a random line bet. secs. 1 and 20.

40.00 Set temp. 1/4 sec. cor.

82.09 Intersect N. bdy. of the Tp., 5 lks. W. of the cor. of secs. 1, 2, 35 and 36, described in the field notes of the survey of T. 14 S., R. 10 W.

Thence

S. 0°08' W., on true line bet. secs, 1 and 2.

Over gently rolling land, with a gravelly surface, through medium dense undergrowth.

9.60 Wash, 40 lks. wide, 4 ft. deep, drains S. 60° E.

10.50 Old road, bears N. 60° W. and S. 60° E.

42.09 Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, with a quartzite stone, 12x12x5 ins., marked 1/4 on one face, deposited alongside, for 1/4 sec. cor., with brass cap marked.

1/4
S 2 | S 1
1934

of stone, 3 ft. base, 2 1/2 ft. high, W. of cor. raise a mound

57:10 Wash, 20 lks. wide; 3 ft. deep, drains S. 75° E.

68.70 Wash, 30 lks. wide, 3 ft. deep, drains N. 60° E.

82.09 The cor. of secs. 1, 2, 11 and 12.

Land, gently rolling; drainage, easterly.

Soil, sandy clay loam, with a gravelly surface, 3rd rate.

No timber.

Undergrowth, medium dense shadscale and greasewood.

Fair grazing land.

From the standard cor. of secs. 34 and 35, on the S. bdy. of the Tp., heretefore described.

N. 0°06' E., bet. secs. 34, and 35.

Over gently rolling land, with scattered rock on the surface, through medium dense undergrowth.

8.40 Ungraded road, bet. Joy and Delta, Utah, bears NW. and SE.

23.80 Wash, 20 lks. wide, 2 ft. deep, drains East

35.00 Wash, 10 lks. wide, 1 ft. deep, drains NE

SUBDIVISION OF T. 15 S., R. 10 W.

Chains

37.40 Wash, 10 lks. wide, 2 ft. deep, drains SE.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/4 sec. cor., with brass cap marked.

1/4

S34 | S35

1934

raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

49.50 Wash, 10 lks. wide, 1 ft. deep, drains SE.

74.80 Wash, 25 lks. wide, 1 ft. deep, drains E.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 26, 27, 34 and 35, with brass cap marked.

T15S R10W

S27 | S26

S34 | S35

1934

raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Land, gently rolling; drainage, easterly.

Soil, sandy clay loam and gravel, with scattered rock on the surface, 3rd rate.

No timber.

Undergrowth, medium dense shadscale and greasewood.

Fair grazing land:

East, on a random line bet. secs. 26 and 35.

40.00 Set temp. 1/4 sec. cor.

79.98 Intersect the cor. of secs. 25, 26, 35 and 36.

Thence

West, on true line bet. secs. 26 and 35.

Over gently rolling land, with scattered rock on the surface, through medium dense undergrowth.

39.99 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/4 sec. cor., with brass cap marked.

1/4 S26

S35

1934

raise a mound of stone, 3 ft. base, 2 1/2 ft. high, N. of cor.

54.20 Wash, 30 lks. wide, 3 ft. deep, drains S. 70° E.

SUBDIVISION OF T. 15 S., R. 10 W.


Chains
 79.98 The cor. of secs. 26, 27, 34 and 35. 01.78
 Land, gently rolling; drainage, southeasterly. 00.04
 Soil, sandy clay, with scattered rock on the surface, 3rd rate.
 No timber.
 Undergrowth, medium dense shadscale and greasewood.
 Fair grazing land.

N. 0°06' E., bet. secs. 26 and 27.

Over gently rolling land, with scattered rock on the surface, through medium dense undergrowth.

4.10 Wash, 10 lks. wide, 1 ft. deep, drains E.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked.




of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor. raise a mound

56.00 Wash, (main drainage) 70 lks. wide, 2 ft. deep, drains NE. road in bottom of wash, bears NE. and SW.

61.50 Wash, 60 lks. wide, 2 ft. deep, drains SE.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 22, 23, 26 and 27, with brass cap marked.



1934

of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor. raise a mound

Land, gently rolling; drainage, northeasterly.

Soil, sandy clay loam and gravel, with scattered rock on the surface, 3rd rate.

No timber.

Undergrowth, medium dense shadscale and greasewood.

Fair grazing land.

East, on a random line bet. secs. 23 and 26.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

SUBDIVISION OF T. 15 S., R. 10 W.

Chains

79.94 Intersect the cor. of secs. 23, 24, 25 and 26.

Thence

West, on true line bet. secs. 23 and 26.

Over gently rolling land, with scattered rock on the surface, through medium dense undergrowth.

7.30 Wash, 40 lks. wide, 2 ft. deep, drains N. 60° E.

15.00 Wash, 30 lks. wide, 2 ft. deep, drains N. 70° E.

20.30 Old road, bears N. 70° E. and S. 70° W.

21.90 Small wash, drains N. 50° E.

39.97 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked.

$\frac{1}{4}$ S23
S26

1934

raise a mound of stone, 4 ft. base, 3 ft. high, N. of cor.

79.94 The cor. of secs. 22, 23, 26 and 27.

Land, gently rolling; drainage, northeasterly.

Soil, sandy clay loam and gravel, with scattered rock on the surface, 3rd rate.

No timber.

Undergrowth, medium dense shadscale and greasewood.

Fair grazing land.

N. 0°06' E., bet. secs. 22 and 23.

Over gently rolling land, with scattered rock on the surface, through medium dense undergrowth.

18.10 Wash, 30 lks. wide, 2 ft. deep, drains NE.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked.

$\frac{1}{4}$
S22 | S23

1934

raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor.

62.00 Old road, bears NE. and SW.

80.00 Set an iron post, 3 ft. long, 2 in. diam., 27 ins. in the ground, for cor. of secs. 14, 15, 22 and 23, with brass cap marked.

SUBDIVISION OF T. 15 S., R. 10 W.

Chains

T15S.	R10W.
S15	S14
S22	S23

1934

of stone, 3 ft. base, 3 ft. high, W. of cor.

Land, gently rolling; drainage, northeasterly.

Soil, sandy clay loam, with a gravelly and rocky surface 3rd rate.

No timber.

Undergrowth, medium dense shadscale and greasewood.

Fair grazing land.

East, on a random line bet. secs. 14 and 23.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

79.92 Intersect N. and S. line, 2 lks. S. of the cor. of secs. 13, 14, 23 and 24.

Thence

S. 89°59' W., on true line bet. secs. 14 and 23.

Over gently rolling land, with a gravelly surface, through medium dense undergrowth.

4.20 Wash, 10 lks. wide, 1 ft. deep, drains N. 20° E.

14.90 Wash, 10 lks. wide, 2 ft. deep, drains N. 40° E.

39.96 Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked.

$\frac{1}{4}$ S14
S23

1934

of stone, 3 ft. base, 2 ft. high, N. of cor. raise a mound

Ascend a gentle E. slope.

52.10 Wash, 20 lks. wide, 2 ft. deep, drains NE.

57.40 Wash, 30 lks. wide, 2 ft. deep, drains NE.

66.20 Old road, bears N. 40° E. and S. 40° W.

79.92 The cor. of secs. 14, 15, 22 and 23, 60 ft. above $\frac{1}{4}$ sec. cor.

Land, gently rolling; drainage, northeasterly.

Soil, sandy clay loam and gravel, with scattered rock on the surface, 3rd rate.

No timber.

SUBDIVISION OF T. 15 S., R. 10 W.

Chains

Undergrowth, medium dense shadscale and greasewood.

Fair grazing land.

N. 0°06' E., bet. secs. 14 and 15.

Over rolling land, with a gravelly and rocky surface, through medium dense undergrowth; ascend a gentle SE. slope.

8.00 Saddle on low spur, 20 ft. above, sec. cor., projects NE.; descend a gradual NW. slope.

23.30 Wash, 10 lks. wide, 2 ft. deep, 50 ft. below spur, drains E.; ascend a gradual S. slope.

28.90 Low spur, 30 ft. above wash, projects E.; descend a gentle N. slope.

31.40 Wash, 25 lks. wide, 2 ft. deep, 5 ft. below spur, drains E.; ascend a gradual S. slope.

40.00 On a gradual S. slope, 10 ft. above wash.

Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground to solid rock, with a quartzite stone, 4x3x3 ins., marked X, deposited at the base, and in a mound of stone, 4 ft. base, to top, for $\frac{1}{2}$ sec. cor., with brass cap marked

S15 | S14

1934

57.00 Top of knoll, approximately 8.00 chs. long, and 4.00 chs. wide, 60 ft. above $\frac{1}{2}$ sec. cor.; descend a steep N. slope.

62.00 Wash, 20 lks. wide, 2 ft. deep, 90 ft. below top of knoll, drains N. 75° E.; thence over rolling land.

69.00 Wash, 15 lks. wide, 2 ft. deep, 100 ft. below top of knoll, drains E.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 10, 11, 14 and 15, with brass cap marked.

T15S | R10W

S10 | S11

S15 | S14

1934

of stone, 3 ft. base, 2 ft. high, W. of cor. raise a mound

Land, rolling and low hills; drainage, easterly.

Soil, sandy clay loam and gravel, with a rocky surface, 3rd rate.

No timber.

Undergrowth, medium dense shadscale and greasewood.

Fair grazing land.

SUBDIVISION OF T. 15 S., R. 10 W.

- Chains N. 89°59' E., on a random line bet, secs. 11 and 14.
- 40.00 Set temp. $\frac{1}{2}$ sec. cor.
- 70.82 Intersect N. and S. line, 5 lks. N. of the cor. of secs. 11, 12, 13 and 14.

Thence

N. 89°59' W., on true line bet. secs. 11 and 14.

Over gently rolling land, with scattered rock on the surface, through medium dense undergrowth; ascend a gentle E. slope, 10 ft. to $\frac{1}{2}$ sec. cor.

- 23.20 Wash. 20 lks. wide, 2 ft. deep, drains NE.
- 36.80 Old road, bears N. and S.
- 39.91 Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground to solid rock, and in a mound of stone, 3 ft. base to top, for $\frac{1}{2}$ sec. cor., with brass cap marked.

$\frac{1}{2}$ S11
S14

1934

of stone, 3 ft. base, 2 ft. high, N. of cor. raise a mound

Ascend a gradual E. slope.

- 47.50 Old road, bears N. 20° E. and S. 20° W.
- 70.82 The cor. of secs. 10, 11, 14 and 15, 150 ft. above $\frac{1}{2}$ sec. cor.

Land, gently rolling; drainage, northeasterly.

Soil, sandy clay loam and gravel, with a rocky surface, 3rd rate.

No timber.

Undergrowth, medium dense shadscale and greasewood.

Fair grazing land.

N. 0°06' E., bet. secs. 10 and 11.

Over rolling land, with a gravelly and rocky surface, through medium dense undergrowth; ascend a gradual S. slope.

- 10.00 Top of ascent, 130 ft. above sec. cor., bears E. and W.; descend along a rolling E. slope.
 - 18.00 Wash, 40 lks. wide, 3 ft. deep, drains E.
 - 40.00 On a gentle E. slope, 60 ft. below step of ascent.
- Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{2}$ sec. cor., with brass cap marked.

SUBDIVISION OF T. 15 S., R. 10 W.

Chains

$\frac{1}{4}$ ✓
 S10 | S11
 1934

raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

- 51.10 Old road, bears N. 60° E. and S. 60° W.
- 59.10 Wash, 30 lks. wide, 3 ft. deep, 50 ft. below $\frac{1}{4}$ sec. cor., drains E.; ascend along a rolling E. slope.
- 62.60 Wash, 40 lks. wide, 3 ft. deep, drains S. 70° E.
- 66.10 Old road, bears E. and W.
- 80.00 On a gradual E. slope, 80 ft. above wash at 59.10 ch. point.

Set an iron post, 3 ft. long, 2 ins. diam., 12 ins. in the ground to solid rock, with a quartzite stone, 4x3x2 ins., marked X, deposited at the base, and in a mound of stone, 6 ft. base, to top, for cor. of secs. 2, 3, 10 and 11, with brass cap marked.

T15S R10W
 S 3 | S 2
 S10 | S11

1934

Land, rolling; drainage, easterly.

Soil, sandy clay loam and gravel, with a rocky surface, 3rd rate.

No timber.

Undergrowth, medium dense shadscale and greasewood.

Fair grazing land.

S. 89°59'E., on a random line bet. secs. 2 and 11.

- 40.00 Set temp. $\frac{1}{4}$ sec. cor.
- 79.80 Intersect N. and S. line, 2 lks. S. of the cor. of secs. 1, 2, 11 and 12.

Thence

West, on true line bet. secs. 2 and 11.

Over gently rolling land, with a gravelly and rocky surface, through medium dense undergrowth; ascend a gradual E. slope.

- 11.80 Old road, bears N. and S.
 - 16.60 Wash, 20 lks. wide, 5 ft. deep, drains N. 60° E.
 - 35.50 Old road, bears N. 60° E. and S. 60° W.
 - 39.90 On a gradual E. slope, 100 ft. above sec. cor.
- Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked.

SUBDIVISION OF T. 15 S., R. 10 W.

Chains

$\frac{1}{4}$ S 2
S 11
1934

017310

79.80 raise a mound of stone, 4 ft. base, 3 ft. high, N. of cor.
The cor. of secs. 2, 3, 10 and 11, 160 ft. above $\frac{1}{4}$ sec. cor.
Land, gently rolling; drainage, northeasterly.
Soil, sandy clay loam and gravel, with a rocky surface, 3rd rate.
No timber.
Undergrowth, medium dense shadscale and greasewood.
Fair grazing land.

40.00 N. 0°08' E., on a random line bet. secs. 2 and 3.
Set temp. $\frac{1}{4}$ sec. cor.
82.05 Intersect N. bdy. of the Tp., 23 lks. E. of the cor. of secs. 2, 3, 34 and 35, described in the field notes of the survey of T. 14 S., R. 10 W.
Thence
S. 0°02' E., on true line bet. secs. 2 and 3.
Over gently rolling land, with a rocky surface, through medium dense undergrowth, along a rolling E. slope.
2.05 Old road, bears E. and W.
21.40 Wash, 20 lks. wide, 8 ft. deep, drains N. 75° E.
26.90 Wash, 30 lks. wide, 7 ft. deep, drains N. 75° E.
37.20 Wash, 20 lks. wide, 2 ft. deep, drains E.
42.05 Set an iron post, 3 ft. long, 1 in. diam., 24 ins. in the ground, to solid rock, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked.

$\frac{1}{4}$
S 3 | S 2
1934

43.00 of stone, 4 ft. base, 3 ft. high, W. of cor. raise a mound
43.00 Wash, 35 lks. wide, 5 ft. deep, drains E.
53.50 Wash, 40 lks. wide, 4 ft. deep, drains S. 70° E.
82.05 The cor. of secs. 2, 3, 10 and 11.
Land, gently rolling; drainage, easterly.
Soil, sandy clay loam and gravel, with a rocky surface, 3rd rate.

SUBDIVISION OF T. 15 S., R. 10 W.

Chains

No timber.
Undergrowth, medium dense shadscale and greasewood.
Fair grazing land.

From the standard cor. of secs. 33 and 34, on the S. bdy. of the Tp., heretofore described.


N. 0°05' E., bet. secs. 33 and 34.

Over rolling land, with scattered rocks on the surface, through medium dense undergrowth.

30.00 Wash, 30 lks. wide, 2-ft. deep, drains E.

30.80 Ungraded road, bet. Joy and Delta, Utah, bears NW. and E.


40.00 Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for 1/4 sec. cor., with brass cap marked.



raise a mound of stone, 3 ft. base, 3 ft. high, W. of cor.

80.00 Near S. edge of wash, 20 ft. below 1/4 sec. cor.

Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, for cor. of secs. 27, 28, 33 and 34, with brass cap marked.



raise a mound of stone, 3 ft. base, 2 1/2 ft. high, W. of cor.

Land, rolling; drainage, easterly.

Soil, sandy clay loam mixed with gravel, with scattered rocks on the surface, 3rd rate.

No timber.

Undergrowth, medium dense shadscale and greasewood.

Fair grazing land.

East, on a random line bet. secs. 27 and 34.

40.00 Set temp. 1/4 sec. cor.

80.06 Intersect N. and S. line, 5 lks. S. of the cor. of secs. 26, 27, 34 and 35.

Thence

SUBDIVISION OF T. 15 S., R. 10 W.

Chains

S. 89°58' W., on true line bet. secs. 27 and 34.

Over rolling land, with scattered rocks on the surface, through medium dense undergrowth.

40.03 Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked.

$\frac{1}{4}$ S27
S34

1934

of stone, 3 ft. base, 2 ft. high, N. of cor. raise a mound

49.69 Old road, bears N. 10° W. and S. 10° E.

79.50 Wash, 20 lks. wide, 2 ft. deep, drains SE.

80.06 The cor. of secs. 27, 28, 33 and 34, 20 ft. above $\frac{1}{4}$ sec. cor.

Land rolling; drainage, southeasterly.

Soil, sandy clay loam mixed with gravel, with scattered rocks on the surface, 3rd rate.

No timber.

Undergrowth, medium dense shadscale and greasewood.

Fair grazing land.

N. 0°05' E., bet. secs. 27 and 28.

Over rolling land, with scattered rocks on the surface, through medium dense undergrowth.

.90 Wash, 20 lks. wide, 2 ft. deep, drains SE.

38.80 South rim of wash, bears N. 75° E. and S. 75° W.; descend an abrupt N. slope.

40.00 At base of abrupt descent, 20 ft. below rim.

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked.

$\frac{1}{4}$
S28 | S27

1934

of stone, 3 ft. base, 3 ft. high, W. of cor. raise a mound

43.00 Bottom of wash, drains N. 75° E.

45.00 Old road, bears N. 75° E. and S. 75° W.

48.50 North rim of wash, 20 ft. above $\frac{1}{4}$ sec. cor., bears N. 75° E. and S. 75° W.

58.90 Old, road, bears N. 75° E. and S. 75° W.

SUBDIVISION OF T. 15 S., R. 10 W.

Chains

- 71.70 Wash, 20 lks. wide, 2 ft. deep, drains SE.
- 80.00 At the head of small draw, 60 ft. above $\frac{1}{4}$ sec. cor., drains SE.
Set an iron post, 3 ft. long, 2 ins. in diam., 30 ins. in the ground, for cor. of secs. 21, 22, 27 and 28, with brass cap marked.

T15S	R10W
S21	S22
S28	S27

1934

raise a mound of stone, 3 ft. base, 2 $\frac{1}{2}$ ft. high, W. of cor.

Land, rolling; drainage, easterly.

Soil, sandy clay loam and gravel, with scattered rocks on the surface, 3rd rate.

No timber.

Undergrowth, medium dense shadscale and greasewood.

Fair grazing land.

N. 89°58' E., on a random line bet. secs. 22 and 27.

- 40.00 Set temp. $\frac{1}{4}$ sec. cor.
- 80.10 Intersect N. and S. line, 2 lks. S. of the cor. of secs. 22, 23, 26 and 27.

Thence

S. 89°57' W., on true line bet. secs. 22 and 27.

Over rolling land, with scattered rocks on the surface, through medium dense undergrowth.

- 15.70 Old road, bears NE. and SW.
- 17.00 Wash, 10 lks. wide, 2 ft. deep, drains NE.
- 36.50 Old road, bears N. 30° E. and S. 30° W.
- 40.05 Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked.

$\frac{1}{4}$ S22
S27

1934

raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.

- 50.60 Old road, bears NE. and SW.; ascend a gradual E. slope.
- 64.40 Base of steep ascent bears N. and S.; ascend a steep E. slope.
- 70.60 Spur, 100 ft. above $\frac{1}{4}$ sec. cor., projects S. 15° W.; descend a gradual SW. slope.


SUBDIVISION OF T. 15 S., R. 10 W.

Chains 80.10 The cor. of secs. 21, 22, 27. and 28, 70 ft. below spur.
 Land, rolling; drainage, northeasterly.
 Soil, sandy clay loam and gravel, with scattered rocks on the surface, 3rd rate.
 No timber.
 Undergrowth, medium dense shadscale and greasewood.
 Fair grazing land.

N. 0°05' E., bet. secs. 21 and 22.


Over rolling land, with scattered rocks on the surface, through medium dense undergrowth; ascend a gradual SW. slope.

- 4.40 Spur, 30 ft. above sec. cor., projects S. 60° E.; descend a gradual N. slope.
- 11.40 Draw, 20 ft. below spur, drains S. 80° E.; base of mountain bears E. and SW.; ascend a gradual S. slope.
- 40.00 On south slope, 200 ft. above draw,
 Set an iron post, 3 ft. long, 1 in. diam., over X cut in solid rock, and in a mound of stone, 6 ft. base, to top, for $\frac{1}{2}$ sec. cor., with brass cap marked.



- 40.60 Top of rocky spur, 20 ft. above $\frac{1}{2}$ sec. cor., projects SW.; descend a steep NW. slope, broken by ledges.
- 45.40 Saddle on spur, bears E., 10 lks. dist.
- 46.40 Draw, 50 ft. below spur, drains S. 35° W.; ascend a steep SE. slope, broken by limestone ledges.
- 57.70 Spur, 90 ft. above draw, projects SW.; descend a steep NW. slope.
- 60.00 Draw, 30 ft. below spur, drains SW.; ascend an abrupt SE. slope; enter scattered juniper, bears E. and SW.
- 80.00 On an abrupt SE. slope, 520 ft. above draw.

Set an iron post, 3 ft. long, 2 ins. diam., 8 ins. in the ground, to solid rock, with a limestone, 8x6x6 ins., marked X, deposited at the base, and in a mound of stone, 8 ft. base, to top, for cor. of secs. 15, 16, 21 and 22, with brass cap marked.



1934

Land, rolling on the S. 11.00 chs., and rough mountainous on the balance of the mile; drainage, easterly on the S. portion, and southwesterly on the N. portion of the mile.

SUBDIVISION OF T. 15 S., R. 10 W.

Chains

Soil, shallow sandy loam, with scattered rocks on the S. portion, and broken limestone ledges on the N. portion, 4th rate.

Timber; no timber on the S. 60.00 chs., scattered juniper on the balance of the mile.

Undergrowth, medium dense shadscale and greasewood.

Fair grazing land.

N. 89°57' E., on a random line bet. secs. 15 and 22.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.14 Intersect N. and S. line, 7 lks. S. of the cor. of secs. 14, 15, 22 and 23.

Thence

S. 89°54' W., on true line bet. secs. 15 and 22.

Over rolling land, with scattered rocks on the surface, through medium dense undergrowth; ascend a gradual E. slope.

14.00 Low spur, 70 ft. above sec. cor., projects S.; descend a gradual SW. slope.

22.20 Old road, bears NE. and SW.

32.30 Wash, 25 lks. wide, 2 ft. deep, 20 ft. below spur, drains SE.; ascend a gradual SE. slope.

40.07 On a gradual SE. slope, 40 ft. above wash.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked.

$\frac{1}{2}$ S15
S22

1934

of stone, 3 ft. base, 3 ft. high, N. of cor. raise a mound

48.00 Wash, 40 lks. wide, 3 ft. deep, drains S. 70° E.; base of mountain, bears N. 10° E. and S. 10° W.; ascend an abrupt NE. slope, over high limestone ledges.

71.00 Top of high ledges, bears NW. and SE.

77.60 Spur, 880 ft. above $\frac{1}{4}$ sec. cor., projects S. 20° E.; ascend along a SE. slope.

80.14 The cor. of secs. 15, 16, 21 and 22, 890 ft. above $\frac{1}{4}$ sec. cor.

Land, rolling on the E. 48.00 chs., and rough mountainous on the balance of the mile; drainage, southeasterly.

Soil, sandy clay loam and gravel, with scattered rocks on the surface, on the E. portion of the mile, 3rd rate, shallow sandy loam, with high broken limestone ledges on the W. portion of the mile, 4th rate.

SUBDIVISION OF T. 15 S., R. 10 W.

Chains

No timber.

Undergrowth, medium dense shadscale and greasewood.

Fair grazing land.

N. 0°05' E., bet. secs. 15 and 16.

Over rough mountainous land, broken by limestone and quartzite ledges, through medium dense undergrowth; ascend a SE. slope.

1.80 Spur, 10 ft. above sec. cor., projects SE.; descend along a steep E. slope.

6.80 Head of draw, 10 ft. below spur, drains E.; ascend a steep SE. slope.

16.10 Spur, 110 ft. above head of draw, projects N. 80° E.; descend an abrupt NE. slope, over broken quartzite ledges.

32.00 Draw, 400 ft. below spur, drains NE.; ascend a steep broken SE. slope.

37.40 Spur, 30 ft. above draw, projects NE.; descend an abrupt NW. slope.

40.00 On an abrupt NW. slope, 40 ft. below spur.

Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground, to solid rock, and in a mound of stone, 5 ft. base, to top, for $\frac{1}{2}$ sec. cor., with brass cap marked.

S16 | S15

1934

of stone, 4 ft. base, 3 ft. high, W. of cor. raise a mound

41.10 Draw, 30 ft. below $\frac{1}{2}$ sec. cor., drains N. 80° E.; ascend a steep SE. slope.

46.00 Spur, 60 ft. above draw, projects N. 80° E.; descend a gradual N. slope.

49.60 Draw, 40 ft. below spur, drains E.; ascend an abrupt S. slope.

58.00 Spur, 320 ft. above draw, projects E., approximately 6.00 chs. dist., thence N. 15° E.; ascend along an abrupt NE. slope.

63.30 Top of ascent, 370 ft. above draw, slopes E.; descend an abrupt N. slope.

70.80 Draw, 210 ft. below top of ascent, drains N. 80° E.; ascend an abrupt SE. slope.

76.00 Ascend along an abrupt E. slope.

80.00 On an abrupt SE. slope, 290 ft. above draw.

Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, for cor. of secs. 9, 10, 15 and 16, with brass cap marked.

SUBDIVISION OF T. 15 S., R. 10 W.

Chains

T15S	R10W
S9	S10
S16	S15

1934

raise a mound
of stone, 4 ft. base, 3 ft. high, W. of cor.

Land, rough mountainous; drainage, northeasterly.

Soil, shallow sandy loam, with broken limestone and quartzite ledges, 4th rate.

No timber.

Undergrowth, medium dense shadscale and greasewood.

Fair grazing land.

N. 89°54' E., on a random line bet. secs. 10 and 15.

40.00 Set temp. $\frac{1}{2}$ sec. cor.

80.28 Intersect N. and S. line, 2 lks. N. of the cor. of secs. 10, 11, 14 and 15.

Thence

S. 89°55' W., on true line bet. secs. 10 and 15.

Over rolling land, through medium dense undergrowth; ascend a gradual SE. slope.

3.60 Base of mountains, bears N. and S60° W.; enter rocky land; ascend along a steep S. slope.

32.10 Top of ascent, 400 ft. above sec. cor., slopes S.; descend along a steep S. slope.

40.14 On a steep S. slope, 50 ft. below top of ascent.

Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground, to solid rock, and in a mound of stone, 5 ft. base, to top, for $\frac{1}{2}$ sec. cor., with brass cap marked.

$\frac{1}{2}$ S10
S15

1934

raise a mound
of stone, 3 ft. base, 3 ft. high, N. of cor.

42.80 Head of draw, drains S., approximately 10.00 chs. dist., thence E.; ascend an abrupt E. slope; enter quartzite slide rock, bears N. and S.

53.10 Rocky spur, 410 ft. above $\frac{1}{2}$ sec. cor., projects N.; descend an abrupt rocky W. slope.

64.00 Draw, 250 ft. below spur, drains N. 15° E.; ascend an abrupt SE. slope, over quartzite ledges.

80.28 The cor. of secs. 9, 10, 15 and 16, 620 ft. above draw.

SUBDIVISION OF T. 15 S., R. 10 W.

Chains	<p style="text-align: right;">POLYAKO</p> <p>Land, rolling on the E. 4.00 chs., and rough mountainous on the balance of the mile; drainage, southerly on the E. portion of mile, and northeasterly on the W. portion of the mile.</p> <p>Soil, shallow sandy loam, with a rocky surface on the E. portion of the mile, and quartzite ledges and slide rock on the W. portion of the mile, 4th rate.</p> <p>No timber.</p> <p>Undergrowth, medium dense shadscale and greasewood.</p> <p>Fair grazing land.</p>
	<p>N. 0°05' E., bet. secs. 9 and 10.</p> <p>Over rough mountainous land, broken by ledges, through medium dense undergrowth; ascend a steep SE. slope.</p>
.70	Spur, 10 ft. above sec. cor., projects N. 85° E.; descend an abrupt N. slope.
13.40	Draw, 600 ft. below spur, drains N. 85° E.; ascend an abrupt S. slope.
26.40	Spur, 270 ft. above draw, projects SE.; descend a gentle NE. slope.
30.90	Draw, 5 ft. below spur, drains SE.; ascend an abrupt S. slope.
40.00	<p>On an abrupt S. slope, 540 ft. above draw at 26.40 ch. point.</p> <p>Set an iron post, 3 ft. long, 1 in. diam., 14 ins. in the ground, to solid rock, and in a mound of stone, 5 ft. base to top, for $\frac{1}{2}$ sec. cor., with brass cap marked.</p> <p style="text-align: center;">$\frac{1}{2}$</p> <p style="text-align: center;">S 9 S10</p> <p style="text-align: center;">1934</p>
	<p style="text-align: right;">raise a mound</p> <p>of stone, 4 ft. base, 3 ft. high, W. of cor.</p>
50.70	Spur, 410 ft. above $\frac{1}{2}$ sec. cor., projects SE.; descend along an abrupt E. slope.
56.20	Head of draw, 100 ft. below spur, drains SE.; ascend an abrupt S. slope.
69.30	Spur, 170 ft. above head of draw, projects N. 70° E.; descend abruptly over broken ledges, along a NW. slope.
77.10	Head of draw, drains N. 20° E.; descend along an abrupt E. slope.
80.00	<p>On an abrupt E. slope, 490 ft. below spur.</p> <p>Set an iron post, 3 ft. long, 2 in. diam., 6 ins. in the ground, to solid rock, and in a mound of stone, 6 ft. base, to top, for cor. of secs. 3, 4, 9 and 10, with brass cap marked.</p>

SUBDIVISION OF T. 15 S., R. 10 W.

Chains

T15S R10W
 S 4 | S 3
 S 9 | S 10

1934

raise a mound of stone, 4 ft. base, 3 ft. high, W. of cor.

Land, rough mountainous; drainage, southeasterly on the S. 70.00 chs., and northeasterly on the balance of the mile.

Soil, shallow sandy loam, with slide rock on the surface, and outcroppings of quartzite ledges, 4th rate.

No timber.

Undergrowth, medium dense shadscale, greasewood and sagebrush.

Fair grazing land.

N. 89°55' E., on a random line bet. secs. 3 and 10.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.24 Intersect N. and S. line, 23 lks. S. of the cor. of secs. 2, 3, 10 and 11.

Thence

S. 89°45' W., on true line bet. secs. 3 and 10.

Over rolling land, with a rocky surface, through medium dense undergrowth; ascend a gradual E. slope.

35.00 Base of mountains, bears N. 20° E. and S. 20° W.; ascend an abrupt NE. slope.

40.12 On an abrupt NE. slope, 230 ft. above sec. cor.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked.

$\frac{1}{2}$ S 3
 S 10

1934

raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.

51.00 Spur, 400 ft. above $\frac{1}{4}$ sec. cor., projects NE.; continue ascent along NE. slope.

70.00 Rocky spur, 890 ft. above $\frac{1}{4}$ sec. cor., projects N.; descend a steep NW. slope.

74.00 Draw, 60 ft. below rocky spur, drains N. 20° E.; ascend a steep E. slope.

80.24 The cor. of secs. 3, 4, 9 and 10, 50 ft. above draw.

Land, rolling on the E. 35.00 chs., and rough mountainous on the balance of the mile; drainage, northeasterly.

Soil, sandy clay loam and gravel, with a rocky surface,

SUBDIVISION OF T. 15 S., R. 10 W.

Chains

on the E. portion of the mile, 3rd rate, shallow sandy loam, with quartzite slide rock on the surface, and quartzite ledges, on the W. portion of the mile, 4th rate.

No timber.

Undergrowth, medium dense shadscale and greasewood.

Fair grazing land.

N. 0°02' W., on a random line bet. secs. 3 and 4.

40.00 Set temp. 1/2 sec. cor.

82.28 Intersect N. bdy. of the Tp., 12 lks. W. of the cor. of secs. 3, 4, 33 and 34, described in the field notes of the survey of T. 14 S., R. 10 W.

Thence

S. 0°03' W., on true line bet. secs. 3 and 4.

Over rough mountainous land, with slide rock on the surface, through medium dense undergrowth; descend an abrupt SW. slope.

9.60 Draw, 200 ft. below sec. cor., drains SE.; ascend a gentle NE. slope.

13.30 Spur, 10 ft. above draw, projects SE.; descend a gentle SW. slope.

15.80 Draw, 50 ft. below spur, drains SE.; ascend a gradual NE. slope.


18.30 Spur, 15 ft. above draw, projects SE.; descend an abrupt SW. slope.

28.60 Draw, 180 ft. below spur, drains S. 75° E.; ascend a gradual NE. slope.

34.80 Spur, 40 ft. above draw, projects SE.; descend a gradual S. slope.

42.28 On a gradual S. slope, 20 ft. below spur.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/2 sec. cor., with brass cap marked.



of stone, 4 ft. base, 3 ft. high, W. of cor. raise a mound

46.10 Old road, bears NE. and W.

51.40 Draw, 10 ft. below 1/2 sec. cor., drains E.; ascend an abrupt NW. slope.

74.30 Spur, 530 ft. above draw, projects N. 15° E., continue ascent along a steep E. slope.

82.28 The cor. of secs. 3, 4, 9 and 10, 630 ft. above draw.

. SUBDIVISION OF T. 15 S., R. 10 W.

Chains

Land, rough mountainous; drainage, southeasterly on the N. portion of the mile, and northeasterly on the S. portion of the mile.

Soil, shallow sandy loam, with a rocky surface, and outcroppings of quartzite ledges, 4th rate.

No timber.

Undergrowth, medium dense shadscale, sagebrush and greasewood.

Fair grazing land.

From the standard cor. of secs. 32 and 33, on the S. bdy. of the Tp., heretofere described.

N. 0°04' E., bet. secs. 32 and 33.

Over rolling land, with scattered rocks on the surface, through medium dense undergrowth; descend a gradual NE. slope.

11.10 Wash, 60 lks. wide, 2 ft. deep, 20 ft. below sec. cor., drains S. 70° E.; ascend along a rolling SE. slope;

17.70 Wash, 20 lks. wide, 2 ft. deep, drains S. 60° E.

40.00 On a gradual SE. slope, 50 ft. above wash at 11.10 ch. point.

Set an iron post, 3-ft. long, 1 in. diam., 16 ins. in the ground, to solid rock, with a limestone, 4x4x3 ins., marked X, deposited at the base, and in a mound of stone, 4 ft. base, to top, for $\frac{1}{4}$ sec. cor., with brass cap marked.

$\frac{1}{4}$
 S32 | S33
 1934

of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor. raise a mound

45.00 Low rise, 10 ft. above $\frac{1}{4}$ sec. cor., bears N. 70° W. and S. 70° E.

74.70 Rise, 30 ft. above $\frac{1}{4}$ sec. cor., bears N. 70° W. and S. 70° E.; descend a gentle N. slope.

80.00 In bottom of swale, 15 ft. below rise, drains SE.

Set an iron post, 3 ft. long, 2 ins. diam., 15 ins. in the ground, to solid rock, and in a mound of stone, 3 ft. base, to top, for cor. of secs. 28, 29, 32 and 33, with brass cap marked.

T15S | R10W
 S29 | S28
 S32 | S33

1934

of stone, 3 ft. base, 2 ft. high, W. of cor. raise a mound

SUBDIVISION OF T. 15 S., R. 10 W.

Chains

Land, rolling; drainage, southeasterly, surface broken by washes.

Soil, sandy clay loam, with scattered rocks on the surface, 3rd rate.

No timber.

Undergrowth, medium dense shadscale and greasewood.

Fair grazing land.

East, on a random line bet. secs. 28 and 33.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.08 Intersect the cor. of secs. 27, 28, 33 and 34.

Thence

West, on true line bet. secs. 28 and 33.

Over rolling land, with scattered rocks on the surface, through medium dense undergrowth.

4.00 Wash, 20 lks. wide, 2 ft. deep, drains N. 80° E.

10.00 Same wash, drains S. 85° E.

27.10 Same wash, drains N. 80° E.

39.90 Same wash, drains S. 70° E.

40.04 Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked.

$\frac{1}{4}$ S28

S33

1934

of stone, 4 ft. base, 3 ft. high, N. of cor. raise a mound

54.00 Top of rise, 30 ft. above $\frac{1}{4}$ sec. cor., bears S. 60° E. and N. 60° W.; descend a gentle SW. slope.

69.70 Wash, 30 lks. wide, 1 ft. deep, drains SE.; also ungraded road, bet. Joy and Delta, Utah, bears NW. and SE.

80.08 The cor. of secs. 28, 29, 32 and 33.

Land, rolling; drainage, easterly on the E. portion of the mile, and southeasterly on the W. portion of the mile. surface broken by draws.

Soil, sandy clay loam, and gravel, with scattered rocks on the surface, 3rd rate.

No timber.

Undergrowth, medium dense shadscale and greasewood.


Fair grazing land.

N. 0°04' E., bet. secs. 28 and 29.

SUBDIVISION OF T. 15 S., R. 10 W.


Chains

- Over rolling land, with scattered rocks on the surface, through medium dense undergrowth; ascend along a rolling SE. slope.
- 10.20 Ungraded road, bet. Joy and Delta, Utah, bears N. 80° W. and S. 80° E.
- 29.00 Top of rise, 50 ft. above sec. cor., bears E. and W.; descend a gradual NE. slope.
- 37.00 Wash, 100 lks. wide, 50 ft. below rise, drains E.; ascend a gradual S. slope. Old road in wash, bears E. and W.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked.



- of stone, 4 ft. base, 3 ft. high, W. of cor. raise a mound
- 5.80 Small wash, drains SE.; ascend a gradual SW. slope.
- 4.50 Top of ascent, 100 ft. above $\frac{1}{4}$ sec. cor., slopes S.; thence over a gradual SE. slope.
- 9.50 Spur, 110 ft. above $\frac{1}{4}$ sec. cor., projects S. 60° E.; descend a gentle NE. slope.
- 3.70 Small wash, 10 ft. below spur at 69.50 ch. point, drains S. 60° E.; ascend a gradual SW. slope.
- 6.70 Spur, 30 ft. above wash, projects S. 60° E.; descend gradually along a NE. slope.
- 0.00 On a gradual NE. slope.

Set an iron post, 3 ft. long, 2 ins. diam., 20 ins. in the ground, to solid rock, and in a mound of stone to top, for cor. of secs. 20, 21, 28 and 29, with brass cap marked.



1934

of stone, 4 ft. base, 4 ft. high, W. of cor. raise a mound

Land, rolling; drainage, southeasterly, surface broken by draws and spurs.

Soil, sandy clay loam and gravel, with scattered rocks on the surface, 3rd rate.

No timber.

Undergrowth, medium dense shadscale and greasewood.

Fair grazing land.

East, on a random line bet. secs. 21 and 28.

SUBDIVISION OF T. 15 S., R. 10 W.

Chains

- 40.00 Set temp. $\frac{1}{2}$ sec. cor.
- 80.12 Intersect N. and S. line, 7 lks. N. of the cor. of secs. 21, 22, 27 and 28.
- Thence
- N. $89^{\circ}57'$ W., on true line bet. secs. 21 and 28.
- Over rolling land, with scattered rocks on the surface, through medium dense undergrowth; ascend a gradual NE. slope.
- 3.20 Spur, 20 ft. above sec. cor., projects SE.; ascend along a gradual SE. slope.
- 9.10 Head of small draw, drains SE.
- 14.80 Spur, 30 ft. above sec. cor., projects SE.; descend a gradual SW. slope.
- 19.80 Draw, 10 ft. below spur at 14.80 ch. ^{point} /, drains SE.; ascend a gradual NE. slope.
- 23.40 Spur, 30 ft. above draw, projects SE.; ascend along a gradual SE. slope.
- 28.40 Head of small draw, drains SE.
- 31.40 Spur, 80 ft. above draw at 19.80 ch. ^{point} /, projects SE.; descend a gradual SW. slope, 20 ft. to $\frac{1}{2}$ sec. cor..
- 40.06 Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{2}$ sec. cor., with brass cap marked.
- $\frac{1}{2}$ S21

S28
- 1934
- of stone, 4 ft. base, 3 ft. high, N. of cor. ^{raise a mound}
- 41.40 Wash, 40 lks. wide, 3 ft. deep, drains S. 60° E.; old road, bears S. 60° E. and NW.; ascend a gradual NE. slope.
- 46.20 Spur, 30 ft. above $\frac{1}{2}$ sec. cor., projects SE.; descend a gradual SW. slope.
- 56.20 Draw, 30 ft. below spur, drains SE.; ascend a gradual NE. slope.
- 74.00 Spur, 80 ft. above draw, projects SE.; descend a gradual SW. slope.
- 78.20 Draw, 20 ft. below spur, drains SE.; ascend a gradual NE. slope.
- 80.12 The cor. of secs. 20, 21, 28 and 29, 30 ft. above draw.
- Land, rolling; drainage, southeasterly, surface broken by draws and spurs.
- Soil, sandy clay loam and gravel, with scattered rocks on the surface, 3rd rate.
- No timber.
- Undergrowth, medium dense shadscale, greasewood and grass.
- Fair grazing land.

SUBDIVISION OF T. 15 S., R. 10 W.

Chains

N. 0°04' E., bet. sec. 20 and 21.

Over rolling land, with scattered rocks on the surface, through medium dense undergrowth; descend a gradual NE. slope.

- 3.90 Draw, 30 ft. below sec. cor., drains SE.; base of mountain bears N. 80° E. and N. 80° W.; ascend a steep SW. slope.
- 14.00 Spur, 70 ft. above draw, projects SE.; ascend along a rolling SE. slope; enter rocky land, bears E. and W.
- 21.50 Head of draw, drains E.
- 40.00 On a gradual SE. slope, 240 ft. above draw at 3.90 ch. point.
Set an iron post, 3 ft. long, 1 in. diam., 8 ins. in the ground, to solid rock, with a limestone 4x3x3 ins., marked X, deposited at the base, and in a mound of stone, 4 ft. base, to top, for $\frac{1}{2}$ sec. cor., with brass cap marked

S20	S21
-----	-----

1934

- 41.10 Spur, 10 ft. above $\frac{1}{2}$ sec. cor., projects SE.; descend a steep NE. slope.
- 46.40 Draw, 100 ft. below spur, drains SE.; ascend along a SE. slope.
- 54.20 Spur, projects S. 70° W.; ascend a gradual SW. slope.
- 57.80 Spur, 70 ft. above draw, projects S. 70° W.; descend a steep NW. slope.
- 60.30 Draw, 50 ft. below spur, drains S. 70° W.; ascend a gradual S. slope.
- 64.20 Spur, 90 ft. above draw, projects E.; descend a steep N. slope; enter scattered juniper; bears E. and W.
- 66.60 Draw, 30 ft. below spur, drains SE.; ascend a steep S. slope.
- 71.70 Spur, 70 ft. above draw, projects SE., thence along a gradual NE. slope.
- 80.00 On a gradual NE. slope.

Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, and in a mound of stone, 3 ft. base, to top, for cor. of secs. 16, 17, 20 and 21, with brass cap marked.

T15S	R10W
S17	S16
S20	S21

1934

raise a mound of stone, 5 ft. base, 3 ft. high, W. of cor.

Land, rolling mountainous; drainage, southeasterly.

Soil, sandy and gravel, with a rocky surface, 4th rate.

SUBDIVISION OF T. 15 S., R. 10 W.

Chains	<p>No timber on S. 64.00 chs., scattered juniper on balance of the mile. Undergrowth, medium dense shadeless and greasewood. Fair grazing land.</p>
40.00	<p>S. 89°57' E., on a random line bet. secs. 16 and 21. Set temp. $\frac{1}{4}$ sec. cor.</p>
80.14	<p>Intersect N. and S. line, 2 lks. S. of the cor. of secs. 15, 16, 21 and 22.</p>
	<p>Thence</p>
	<p>N. 89°58' W., on true line bet. secs. 16 and 21.</p>
	<p>Over rough mountainous land, broken by limestone ledges, through scattered timber and undergrowth; ascend an abrupt SE. slope.</p>
.30	<p>Spur, 10 ft. above sec. cor., projects SW.; descend along an abrupt W. slope, broken by ledges.</p>
13.40	<p>Draw, 230 ft. below spur, drains SW.; ascend an abrupt SE. slope.</p>
15.10	<p>Spur, 40 ft. above draw, projects SW.; descend along an abrupt rolling W. slope.</p>
33.10	<p>Gulch, 500 lks. wide, 70 ft. deep, drains S. 15° W.; ascend.</p>
33.70	<p>Top of ledge, 70 ft. high, projects S.; descend.</p>
36.70	<p>Draw, 150 ft. below ledge, drains S.; ascend a steep E. slope.</p>
40.07	<p>On a steep E. slope, 60 ft. above draw. Set an iron post, 3 ft. long, 1 in. diam.; 12 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base, to top, for $\frac{1}{4}$ sec. cor., with brass cap marked.</p>
	<p style="text-align: center;"> $\frac{1}{4}$ S16 $\frac{1}{4}$ S21 1934 </p>
	<p>of stone, 3 ft. base, 3 ft. high, N. of cor. raise a mound</p>
41.30	<p>Spur, 10 ft. above $\frac{1}{4}$ sec. cor.; projects S. 20° E.; descend an abrupt SW. slope.</p>
45.30	<p>Draw, 20 ft. below spur, drains S.; ascend an abrupt E. slope.</p>
48.10	<p>Spur, 70 ft. above draw, projects SE.; descend an abrupt W. slope.</p>
51.80	<p>Draw, 110 ft. below spur, drains S. 20° W.; ascend an abrupt E. slope.</p>
56.10	<p>Spur, 70 ft. above draw, projects S.; descend an abrupt W. slope.</p>
59.30	<p>Draw, 40 ft. below spur, drains S.; ascend an abrupt E. slope.</p>

SUBDIVISION OF T. 15 S., R. 10 W.

- Chains
61.10 Spur, 20 ft. above draw, projects S.; descend an abrupt SW. slope.
- 71.10 Draw, 50 ft. below spur, drains SE.; ascend an abrupt E. slope.
- 73.10 Spur, 20 ft. above draw, projects S. 15° E.; descend an abrupt SW. slope.
- 75.30 Draw, 20 ft. below spur, drains SE.; ascend an abrupt NE. slope.
- 80.14 The cor. of secs. 16, 17, 20 and 21, 90 ft. above draw.
Land, rough mountainous; drainage, southerly.
Soil, shallow sandy loam, with broken limestone ledges and surface rock, 4th rate.
Timber, scattered scrub juniper.
Undergrowth, scattered shadscale and greasewood.
Fair grazing land.
-
- N. 0°04' E., bet. secs. 16 and 17.
Over rough mountainous land, broken by limestone ledges, through scattered timber and undergrowth; ascend an abrupt NE. slope.
- 3.10 Spur, projects S. 10° W.; ascend a steep SW. slope.
- 9.50 Spur, 70 ft. above sec. cor., projects W.; descend an abrupt N. slope.
- 11.80 Draw, 30 ft. below spur, drains W.; ascend an abrupt S. slope.
- 16.30 Spur, 100 ft. above draw, projects W.; descend an abrupt N. slope.
- 18.30 Draw, 60 ft. below spur, drains W.; ascend an abrupt S. slope.
- 22.60 Spur, 140 ft. above draw, projects S. 80° W.; descend an abrupt N. slope.
- 24.70 Draw, 130 ft. below spur, drains W.; ascend an abrupt S. slope.
- 27.30 Point of spur, 20 ft. above draw, slopes W.; descend.
- 29.30 Draw, 25 ft. below point of spur, drains S. 20° W.; ascend an abrupt S. slope.
- 40.00 On top of rocky spur, 210 ft. above draw, projects SW.
Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in a crevice in limestone ledge, for $\frac{1}{2}$ sec. cor., with brass cap marked.

S17 | S16

1934

SUBDIVISION OF T. 15 S., R. 10 W.

Chains

raise a mound
of stone, 6 ft. base, 3 ft. high, W. of cor.

Descend an abrupt NW. slope.

45.30 Draw, 50 ft. below $\frac{1}{2}$ sec. cor., drains SW.; ascend an abrupt S. slope.

52.70 Spur, projects SW.; ascend a gradual SW. slope.

58.50 Spur, 160 ft. above draw, projects W.; descend an abrupt N. slope.

64.60 Draw, 100 ft. below spur, drains SW.; ascend an abrupt SE. slope.

72.50 Spur, 170 ft. above draw, projects SW.; descend an abrupt NW. slope.

77.20 Draw, 100 ft. below spur, drains SW.; ascend an abrupt SE. slope.

80.00 On an abrupt SE. slope, 30 ft. above draw.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 8, 9, 16 and 17, with brass cap marked.

T15S	R10W
S 8	S 9
S17	S16

1934.

raise a mound
of stone, 6 ft. base, 4 ft. high, W. of cor.

Land, rough mountainous; drainage, southwesterly.

Soil, shallow sandy loam, broken by limestone ledges, 4th rate.

Timber, scattered scrub juniper.

Undergrowth, scattered shadscale and greasewood.

Fair grazing land.

S. 89°58' E., on a random line bet. secs. 9 and 16.

40.00 Set temp. $\frac{1}{2}$ sec. cor.

80.14 Intersect N. and S. line 16 lks. S. of the cor. of secs. 9, 10, 15 and 16.

Thence

S. 89°55' W., on true line bet. secs. 9 and 16.

Over rough mountainous land, broken by limestone ledges, through scattered undergrowth; ascend an abrupt E. slope.

3.00 Spur, 20 ft. above sec. cor., projects N. 70° E.; ascend over broken N. slope.

17.00 Top of ascent, 100 ft. above sec. cor., slopes N.; descend an abrupt NW. slope.


SUBDIVISION OF T. 15 S., R. 10 W.

Chains

- 25.80 Draw, 110 below top of ascent, drains N. 20° E.; enter scattered juniper, bears N. and S.; ascend an abrupt SE. slope.
- 28.30 Spur, 130 ft. above draw, projects N. 20° E.; ascend along a broken N. slope.
- 40.07 On a broken N. slope, 250 ft. above draw.
- Set an iron post, 3 ft. long, 1 in. diam., over X cut in solid rock, and in a mound of stone, 6 ft. base, to top, for $\frac{1}{4}$ sec. cor., with brass cap marked.
- $\frac{1}{4}$ S 9
S16
- 1934
- 45.30 Ridge, 120 ft. above $\frac{1}{4}$ sec. cor., bears N. 20° W. and S. 20° E.; descend an abrupt W. slope.
- 52.50 Draw, 220 ft. below ridge, drains SW.; ascend an abrupt SE. slope.
- 65.30 Spur, 150 ft. above draw, projects SW.; descend an abrupt W. slope.
- 79.80 Draw, 220 ft. below spur, drains SW.; ascend a gradual SE. slope.
- 80.14 The cor. of secs. 8, 9, 16 and 17, 10 ft. above draw.
- Land, rough mountainous; drainage, northeasterly on the E. portion of the mile, and southwesterly on the W. portion of the mile.
- Soil, shallow sandy loam, with broken limestone ledges, 4th rate.
- Timber, no timber on the E. 24.00 chs., scattered juniper on the balance of the mile.
- Undergrowth, scattered shadscale and greasewood.
- Fair grazing land.
-
- N. 0°04' E., bet. secs. 8 and 9.
- Over rough mountainous land, broken by limestone ledges, through scattered timber and undergrowth; ascend an abrupt SE. slope.
- 22.30 Ridge, 550 ft. above sec. cor., bears E. and W.; leave timber; descend an abrupt N. slope.
- 30.10 Head of draw, 230 ft. below ridge, drains W.; ascend a gradual S. slope.
- 34.70 Spur, 20 ft. above draw, projects W.; descend an abrupt N. slope.
- 40.00 On an abrupt N. slope, 190 ft. below spur.
- Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked.

SUBDIVISION OF T. 15 S., R. 10 W.

Chains

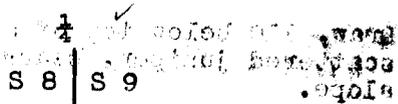


1934

of stone, 4 ft. base, 3 ft. high, W. of cor., raise a mound

- 42.80 Head of draw, 100 ft. below $\frac{1}{4}$ sec. cor., drains NW.; descend along an abrupt W. slope.
- 62.70 Draw, 370 ft. below $\frac{1}{4}$ sec. cor., drains E.; ascend an abrupt S. slope.
- 70.60 Spur, 230 ft. above draw, projects E.; descend an abrupt N. slope.
- 79.40 Draw, 210 ft. below spur, drains N. 85° E.; ascend an abrupt S. slope.
- 80.00 On an abrupt S. slope, 20 ft. above draw.

Set an iron post, 3 ft. long, 2 ins. diam., 20 ins. in the ground, to solid rock, and in a mound of stone, 3 ft. base, to top, for cor. of secs. 4, 5, 8 and 9, with brass cap marked.



1934

of stone, 6 ft. base, 4 ft. high, W. of cor., raise a mound

Land, rough mountainous; drainage, westerly on the S. portion of the mile, and easterly on the N. portion of the mile.

Soil, shallow sandy loam, with broken limestone ledges, 4th rate.

Timber, scattered juniper on the S. 22.00 chs., no timber on the balance of the mile.

Undergrowth, scattered shadscale and sagebrush.

Fair grazing land.

N. 89°55' E., on a random line bet. secs. 4 and 9.

- 40.00 Set temp. $\frac{1}{4}$ sec. cor.

- 80.10 Intersect N. and S. line, 23 lks. N. of the cor. of secs. 3, 4, 9 and 10.

Thence

N. 89°55' W., on true line bet. secs. 4 and 9.

Over rough mountainous land, broken by quartzite ledges, and boulders, through scattered undergrowth; ascend an abrupt E. slope.

- 3.30 Spur, 100 ft. above sec. cor., projects N. 10° E.; descend an abrupt NW. slope.

SUBDIVISION OF T. 15 S., R. 10 W.

- Chains
 12.00 Draw, 240 ft. below spur, drains N.; ascend a gradual E. slope.
 16.90 Spur, 10 ft. above draw, projects N.; descend an abrupt W. slope.
 22.50 Draw, 80 ft. below spur, drains N.; ascend an abrupt E. slope.
 24.40 Spur, 30 ft. above draw, projects N.; descend a steep W. slope.
 35.90 Draw, 160 ft. below spur, drains N.; ascend an abrupt E. slope.
 37.80 Spur, 60 ft. above draw, projects N.; descend a steep W. slope.
 40.05 On a steep W. slope, 30 ft. below spur.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked.

$$\frac{\frac{1}{4} S 4}{S 9}$$

1934

raise a mound
 of stone, 4 ft. base, 3 ft. high, N. of cor.

- 50.10 Draw, 100 ft. below $\frac{1}{4}$ sec. cor., drains N. 60° E.; ascend a steep SE. slope.
 57.80 Spur, 110 ft. above draw, projects NE.; descend a gradual NW. slope.
 71.50 Draw, drains NW.; thence along a N. slope.
 79.30 Draw, drains N. 85° E.; ascend a steep S. slope.
 80.10 The cor. of secs. 4, 5, 8 and 9, 60 ft. above spur.
 Land, rough mountainous; drainage, northeasterly.

Soil, shallow sandy loam, with quartzite slide rock on the surface, and outcroppings of quartzite ledges, 4th rate.

No timber.

Undergrowth, scattered shadscale and sagebrush.

Fair grazing land.

N. 0°03' E., on a random line bet. secs. 4 and 5.

- 40.00 Set temp. $\frac{1}{4}$ sec. cor.

- 82.15 Intersect N. bdy. of the Tp., 14 lks. W. of the cor. of secs. 4, 5, 32 and 33, described in the field notes of survey of T. 14 S., R. 10 W.

Thence

S. 0°09' W., on true line bet. secs. 4 and 5.

SUBDIVISION OF T. 15 S., R. 10 W.

Chains

Over rough mountainous land, broken by outcroppings of quartzite ledges, through medium dense undergrowth; descend an abrupt SE. slope.

23.20 Draw, 470 ft. below sec. cor., drains E.; ascend an abrupt NW. slope.

38.50 Spur, 370 ft. above draw, projects N. 55° E.; descend a gradual SE. slope.

42.15 On a gradual SE. slope.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked.

$\frac{1}{4}$
 S 5 | S 4
 1934

of stone, 4 ft. base, 3 ft. high, W. of cor. raise a mound

43.80 Draw, 30 ft. below spur, drains N. 55° E.; ascend an abrupt NW. slope; enter scattered juniper, bears E. and W.

53.40 Spur, 380 ft. above draw, projects E.; descend an abrupt S. slope; leave junipers, bears E. and W.

82.15 The cor. of secs. 4, 5, 8 and 9, 710 ft. below spur.

Land, rough mountainous; drainage, northeasterly.

Soil, shallow sandy loam, with the surface covered with quartzite rock, and with outcroppings of quartzite ledges, 4th rate.

Timber, scattered juniper on the S. central portion, no timber on the remainder of the mile.

Undergrowth, medium dense shadscale and sagebrush.

Fair grazing land.

From the standard cor. of secs. 31 and 32; on the S. bdy. of the Tp., heretofore described.

N. 0°04' E., bet. secs. 31 and 32.

Over rolling land, with scattered rocks on the surface, through medium dense undergrowth.

16.00 Wash, 10 lks. wide, 1 ft. deep, drains NE.; ascend gently.

21.80 Old road, bears NE. and SW.

34.70 Top of low rise, 25 ft. above sec. cor., bears NW. and SE. descend a gentle NE. slope.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked.

$\frac{1}{4}$
 S31 | S32
 1934

... OF SUBDIVISION OF T. 16 S., R. 10 W.

Chains

... raise a mound
of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

52.10 Wash, 20 lks. wide, 2 ft. deep, drains SE.; ascend a gentle SW. slope.

59.60 Top of low rise, 30 ft. above wash, bears NW. and SE.; descend a gentle NE. slope, 20 ft. to wash.

74.30 Wash, 10 lks. wide, 1 ft. deep, drains SE.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 29, 30, 31 and 32, with brass cap marked.

T15S	R10W
S30	S29
S31	S32

1934

... raise a mound
of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

Land, rolling; drainage, southeasterly, surface broken by washes.

Soil, sandy clay loam, with scattered rocks on the surface, 3rd rate.

No timber.

Undergrowth, medium dense shadscale, greasewood and budsage.

Fair grazing land.

East, on a random line bet. secs. 29 and 32.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.04 Intersect N. and S. line, 7 lks. S. of the cor. of secs. 28, 29, 32 and 33.

Thence

S. $89^{\circ}57'$ W., on true line bet. secs. 29 and 32.

Over rolling land, with a rocky surface, through medium dense undergrowth.

39.50 Old road, bears N. 10° W. and S. 10° E.

40.02 Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked.

$\frac{1}{4}$	S29
	S32

1934

... raise a mound
of stone, 3 ft. base, 2 ft. high, N. of cor.

63.50 Wash, 20 lks. wide, 2 ft. deep, drains SE.; ascend a gradual NE. slope.

73.60 Low rise, 60 ft. above wash, bears NW. and SE.; descend

SUBDIVISION OF T. 15 S., R. 10 W.

Chains

a gentle SW. slope.

80.04 The cor. of secs. 29, 30, 31 and 32, 20 ft. below rise.

Land, rolling; drainage, southeasterly.

Soil, sandy loam and gravel, with a rocky surface, 3rd rate.

No timber.

Undergrowth, medium dense shadscale, greasewood and budsage.

Fair grazing land.

West, on a random line bet. secs. 30 and 31.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.10 Intersect W. bdy. of the Tp., 5 lks. N. of the cor. of secs. 25, 30, 31 and 36, heretofore described.

Thence

N. 89°58' E., on true line bet. secs. 30 and 31.

Over rolling land, with a rocky surface, through medium dense undergrowth; ascend a gentle SW. slope.

5.70 Old road, bears N. and S.

8.60 Top of rise, 10 ft. above sec. cor., bears NW. and SE.; descend a gradual NE. slope.

15.90 Wash, 20 lks. wide, 2 ft. deep, 30 ft. below rise, drains SE.; ascend a gentle SW. slope.

19.60 Low rise, 10 ft. above wash, bears NW. and SE.; descend a gentle NE. slope.

25.70 Wash, 20 lks. wide, 2 ft. deep, 10 ft. below rise, drains SE.; ascend a gentle SW. slope.

40.10 On top of low rise, 30 ft. above wash, bears NW. and SE. Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked.

$\frac{1}{4}$ S30

S31

1934

of stone, 3 ft. base, 2 ft. high, N. of cor. raise a mound

Descend a gradual NE. slope.

47.40 Wash, 20 lks. wide, 2 ft. deep, 70 ft. below $\frac{1}{4}$ sec. cor., drains SE.; ascend a gradual SW. slope.

58.10 Rise, 50 ft. above wash, bears NW. and SE.; descend a gradual NE. slope.

68.00 Wash, 25 lks. wide, 2 ft. deep, 80 ft. below rise, drains SE.

67
SUBDIVISION OF T. 15 S., R. 10 W.

Chains
80.10

The cor. of secs. 29, 30, 31 and 32, 110 ft. below rise.
Land, rolling; drainage, southeasterly, surface broken by washes.
Soil, sandy loam and gravel, with a rocky surface, 3rd rate.
No timber.
Undergrowth, medium dense shadscale and greasewood.
Fair grazing land.

N. 0°04' E., bet. secs. 29 and 30.

Over rolling land, with a rocky surface, through medium dense undergrowth; ascend a gradual SW. slope.

- 5.00 Rise, 40 ft. above sec. cor., bears NW. and SE.; descend a gradual NE. slope.
- 13.30 Wash, 10 lks. wide, 1 ft. deep, 40 ft. below rise, drains SE.; ascend a gradual SW. slope.
- 18.30 Top of ascent, 40 ft. above wash, slopes SE.; descend a gradual NE. slope.
- 23.30 Wash, 20 lks. wide, 2 ft. deep, drains SE.
- 31.90 Outcropping of volcanic stone, bears E. and W.
- 38.30 Wash, 20 lks. wide, 1 ft. deep, 40 ft. below top of ascent, drains SE.; ascend a gentle S. slope.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked.

$\frac{1}{4}$
S30 | S29

1934

raise a mound
of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

- 48.00 Top of rise, 30 ft. above $\frac{1}{4}$ sec. cor., bears N. 55° W. and S. 55° E.; descend a gradual NE. slope.
- 61.00 Ungraded road, bet. Joy and Delta, Utah, bears NW. and SE.
- 62.60 Wash, 250 lks. wide, 2 ft. deep, 30 ft. below rise, drains S. 60° E.; ascend a gradual S. slope.
- 71.00 Outcroppings of volcanic rock; enter scattered juniper, bears E. and W.
- 80.00 On a gradual S. slope, 20 ft. above wash.

Set an iron post, 3 ft. long, 2 ins. diam., 6 ins. in the ground, to solid rock, and in a mound of stone, 6 ft. base, to top, for cor. of secs. 19, 20, 29 and 30, with brass cap marked.

T15S R10W
S19 | S20
S30 | S29
1934

SUBDIVISION OF T. 15 S., R. 10 W.

Chains

A juniper, 10 ins. diam., bears S. 6°30' W., 220 lks. dist., marked T 15 S R 10 W S 30 B T. from which

A juniper 13 ins. diam., bears N. 22°45' W., 209 lks. dist., marked T 15 S R 10 W S 19 B T.

No trees available in secs. 20 and 29.

Land, rolling; drainage, southeasterly, surface broken by washes.

Soil, sandy loam and gravel, with a rocky surface, 3rd rate.

Timber, no timber on the S. 71.00 chs., scattered juniper on the N. 9.00 chs.

Undergrowth, medium dense shadscale and greasewood.

Fair grazing land.

N. 89°57' E., on a random line bet. secs. 20 and 29.

40.00 Set temp. 1/4 sec. cor.

80.08 Intersect N. and S. line, 5 lks. S. of the cor. of secs. 20, 21, 28 and 29.

Thence

S. 89°55' W., on true line bet. secs. 20 and 29.

Over rolling land, with a rocky surface, through medium dense undergrowth; ascend a gradual NE. slope.

2.00 Spur, 20 ft. above sec. cor., projects SE.; descend a rolling S. slope.

19.40 Draw, 50 ft. below spur, drains S.; old road, bears N. and S.; ascend a gradual E. slope.

24.10 Spur, 50 ft. above draw, projects S.; descend a gradual W. slope.

40.04 On a gradual W. slope, 60 ft. below spur.

Set an iron post, 3 ft. long, 1 in. diam., 16 ins. in the ground, to solid rock, and in a mound of stone, 3 ft. base, to top, for 1/4 sec. cor., with brass cap marked.

1/4 S20

S29

1934

of stone, 3 ft. base, 2 1/2 ft. high, N. of cor. raise a mound

42.10 Draw, drains S. 10° E.; ascend over a rolling S. slope.

49.00 Wash, 20 lks. wide, 2 ft. deep, drains SE.; enter scattered juniper, bears N. and S.

56.00 Wash, 30 lks. wide 2 ft. deep, drains SE.; ascend a gradual NE. slope.

64.10 Spur, 40 ft. above wash at 42.10 ch. point, projects SE.; descend a gradual W. slope.

SUBDIVISION OF T. 15 S., R. 10 W.

Chains 71.50	Wash, 30 lks. wide, 2 ft. deep, 30 ft. below spur, drains SE.
80.08	The cor. of secs. 19, 20, 29 and 30. Land, rolling; drainage, southeasterly, surface broken by draws and spurs. Soil, sandy loam and gravel, with a rocky surface, 3rd rate. Timber; no timber on the E. 49.00 chs., scattered juniper on the balance of the mile. Undergrowth, medium dense shadscale and greasewood. Fair grazing land.
<hr/>	
	S. 89°58' W., on a random line bet. secs. 19 and 30.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
80.26	Intersect W. bdy. of the Tp., 12 lks. S. of the cor. of secs. 19, 24, 25 and 30, heretofore described. Thence S. 89°57' E., on true line bet. secs. 19 and 30. Over rolling land, with outcroppings of volcanic rock, through medium dense undergrowth; ascend along a gentle S. slope.
5.60	Spur, 10 ft. above sec. cor., projects S. 75° E.; descend a gradual NE. slope.
25.60	Wash, 30 lks. wide, 2 ft. deep, 60 ft. below spur, drains S 75° E.; ascend a gradual SW. slope.
32.20	Spur, 15 ft. above wash, projects SE.; descend along a gentle N. slope.
40.26	On a gentle N. slope, 30 ft. below spur. Set an iron post, 3ft. long, 1 in. diam., over X cut in solid rock, and in a mound of stone, 6 ft. base, to top, for $\frac{1}{4}$ sec. cor., with brass cap marked. $\frac{1}{4} \frac{S19}{S30}$ 1934
50.30	Wash, 40 lks. wide, 1 ft. deep, drains SE.; ungraded road, bet. Joy and Delta, Utah, bears NW. and SE.; ascend.
54.70	Spur, 10 ft. above wash, projects S.; descend a gentle E. slope.
56.70	Wash, 20 lks. wide, 2 ft. deep, 10 ft. below spur, drains SE.; ascend a gradual SW. slope.
62.80	Spur, 30 ft. above wash, projects S. 60° E.; descend a gradual NE. slope; enter scattered juniper, bears N. and S.
80.26	The cor. of secs. 19, 20, 29 and 30, 30 ft. below spur. Land, rolling; drainage, southeasterly, surface broken by washes.

SUBDIVISION OF T. 15 S., R. 10 W.

Chains

Soil, shallow sandy loam, with outcroppings of ^{granite} rock, 4th rate.

Timber; no timber on the W. 63.00 cha., scattered juniper on the balance of the mile.

Undergrowth, medium dense shadscale and grasswood.

Fair grazing land.

N. 0°04' E., bet. secs. 19 and 20.

Over rolling land, with a rocky surface, through scattered timber and undergrowth; ascend a gradual S. slope.

10.00 Wash, 35 lks. wide, drains SE. ; base of mountain, bears NW. and S. 80° E.; ascend S. slope.

16.50 Spur, 60 ft. above sec. cor., projects S. 70° E.; descend a gradual W. slope.

23.70 Draw, 50 ft. below spur, drains E.; ascend a steep S. slope.

39.00 Spur, 160 ft. above draw, projects E.; descend a steep W. slope.

40.00 On a steep W. slope, 10 ft. below spur.

Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground, to solid rock, with a limestone, 4x3x3 ins., marked X, deposited at the base, and in a mound of stone, 3 ft. base, to top, for $\frac{1}{2}$ sec. cor., with brass cap marked.

$\frac{1}{2}$
 S19 | S20
 1934

No trees available.

45.30 Draw, 80 ft. below $\frac{1}{2}$ sec. cor., drains S. 70° E.; ascend an abrupt SE. slope.

67.40 Spur, 370 ft. above draw, projects S. 70° W.; descend a gradual NW. slope.

73.50 Draw, 30 ft. below spur, drains S. 65° W.; ascend an abrupt SW. slope.

80.00 On an abrupt SW. slope, 130 ft. above draw.

Set an iron post, 3 ft. long, 2 ins. diam.; over X cut in solid rock, and in a mound of stone, 4 ft. base, to top, for cor. of secs. 17, 18, 19 and 20, with brass cap marked.

T15S R10W
 S18 | S17
 S19 | S20
 1934

No suitable bearing trees available.

SUBDIVISION OF T. 15 S., R. 10 W.

Chains

Land, rolling on the S. 10.00 chs., and rough mountainous on the remainder of the mile; drainage, southeasterly on the S. 67.00 chs., and southwesterly on the remainder of the mile.

Soil, shallow sandy loam in places, with outcroppings of limestone surface rock and ledges, 4th rate.

Timber, scattered scrub juniper.

Undergrowth, scattered shadscale, greasewood and budsage.

Fair grazing land.

N. 89°55' E., on a random line bet. secs. 17 and 20.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

79.90 Intersect N. and S. line, 9 lks. S. of the cor. of secs. 16, 17, 20 and 21.

Thence

S. 89°51' W., on true line bet. secs. 17 and 20.

Over rough mountainous land, broken by limestone ledges, through scattered timber and undergrowth; ascend an abrupt E. slope.

.90 Spur, 15 ft. above sec. cor., projects S.; descend an abrupt W. slope.

13.50 Draw, 90 ft. below spur, drains S. 15° W.; ascend an abrupt E. slope.

18.90 Spur, 100 ft. above draw, projects SW.; descend an abrupt NW. slope.

24.70 Draw, 40 ft. below spur, drains S. 20° W.; ascend a gradual SE. slope.

27.90 Spur, 10 ft. above draw, projects S. 15° W.; descend a gradual W. slope.

28.80 Draw, 15 ft. below spur, drains S. 15° W.; ascend a gradual E. slope.

33.90 Spur, 5 ft. above draw, projects S.; descend a steep W. slope.

39.95 On a steep W. slope, 20 ft. below spur.

Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground, to solid rock, and in a mound of stone, 4 ft. base, to top, for $\frac{1}{4}$ sec. cor., with brass cap marked.

S17 ✓

S20

1934

A juniper limb, 6 ins. diam., bears S. 73°30' E., 127 lks. dist., marked $\frac{1}{4}$ S 20 B T.

A juniper, 13 ins. diam., bears N. 58°00' W., 117 lks. dist., marked $\frac{1}{4}$ S 17 B T. ✓

SUBDIVISION OF T. 15 S., R. 10 W.

Chains	
44.80	Old road, bears NW. and SE.
49.10	Draw, 80 ft. below $\frac{1}{4}$ sec. cor., drains S.; ascend an abrupt E. slope.
70.40	Spur, 540 ft. above draw, projects S.; descend along an abrupt SW. slope.
79.90	The cor. of secs. 17, 18, 19 and 20, 120 ft. below spur. Land, rough mountainous; drainage, southwesterly. Soil, shallow sandy loam, with limestone surface rock and ledges, 4th rate. Timber, scattered juniper. Undergrowth, scattered shadscale, hudsage and grass. Fair grazing land.
<hr/>	
	N. $89^{\circ}57'$ W., on a random line bet. secs. 18 and 19.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
80.45	Intersect W. bdy. of the Tp., 16 lks. S. of the cor. of secs. 13, 18, 19 and 24, heretofore described. Thence S. $89^{\circ}50'$ E., on true line bet. secs. 18 and 19. Over rough mountainous land, broken by limestone surface rock and ledges, through scattered undergrowth; descend a steep SE. slope.
.40	Wash, 10 ft. below sec. cor., drains S.; ascend an abrupt W. slope.
8.00	Spur, 100 ft. above wash, projects S.; descend a steep E. slope.
10.00	Draw, 10 ft. below spur, drains S. 15° W.; ascend an abrupt W. slope.
13.00	Spur, 50 ft. above draw, projects S. 15° W.; descend an abrupt E. slope.
16.30	Draw, 70 ft. below spur, drains S. 15° W.; ascend an abrupt W. slope.
19.00	Spur, 50 ft. above draw, projects S.; descend an abrupt E. slope.
22.30	Draw, 40 ft. below spur, drains S.; ascend an abrupt W. slope.
28.30	Spur, 50 ft. above draw, projects S. 70° E.; descend an abrupt NE. slope.
38.80	Draw, 170 ft. below spur, drains S. 70° E.; old road, bears N. 70° W. and S. 70° E.;
40.45	Set an iron post, .3 ft. long, 1 in. diam., 20 ins. in the ground, and in a mound of stone, 3 ft. base, to top, for $\frac{1}{4}$ sec. cor., with brass cap marked.

SUBDIVISION OF T. 15 S., R. 10 W.

Chains

$\frac{1}{4}$ $\frac{S18}{S19}$

1934

of stone, 4 ft. base, 3 ft. high, N. of cor. raise a mound

Ascend a gradual W. slope.

- 47.40 Spur, 15 ft. above $\frac{1}{4}$ sec. cor., projects SE.; descend a gradual NE. slope.
- 52.40 Draw, 40 ft. below spur, drains S.; enter scattered juniper, bears NW. and SE.; ascend a steep W. slope.
- 53.70 Old road, bears N. and S.
- 57.20 Spur, 80 ft. above draw, projects S.; descend an abrupt E. slope.
- 61.00 Draw, 70 ft. below spur, drains S.; ascend an abrupt W. slope.
- 64.80 Spur, 100 ft. above draw, projects S. 15° W.; descend an abrupt E. slope.
- 68.10 Draw, 60 ft. below spur, drains SW.; ascend an abrupt SW. slope
- 80.45 The cor. of secs. 17, 18, 19 and 20, 420 ft. above draw.
Land, rough mountainous; drainage, southwesterly.
Soil, shallow sandy loam, with outcroppings of limestone ledges and surface rock, 4th rate.
Timber, no timber on the W. 52.00 chs., scattered juniper on the remainder of the mile.
Undergrowth, scattered shadscale, greasewood and grass.
Fair grazing land.

N. 0°04' E., bet. secs. 17 and 18.

Over rough mountainous land, broken by limestone ledges and surface rock, through scattered timber and undergrowth; ascend a steep SW. slope.

- 2.00 Top/, 10 ft. above sec. cor.; slopes SW.; descend an abrupt NW. slope, over broken limestone ledges.
of ascent
- 17.70 Draw, 150 ft. below top/, drains SW.; ascend a steep SE. slope.
- 23.30 Spur, 70 ft. above draw, projects SW.; descend a gradual NW. slope.
- 25.50 Draw, 10 ft. below spur, drains SW.; ascend an abrupt SE. slope.
- 33.80 Spur, 180 ft. above draw, projects W.; descend an abrupt N. slope.
- 40.00 On an abrupt N. slope, 230 ft. below spur.

SUBDIVISION OF T. 15 S., R. 10 W.

Chains

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{2}$ sec. cor., with brass cap marked.

$\frac{1}{2}$
 S18 | S17
 1934

of stone, 4 ft. base, 3 ft. high, W. of cor. raise a mound

No suitable bearing trees available:

- 56.40 Draw, 70 ft. below $\frac{1}{2}$ sec. cor., drains SW.; ascend a gradual S. slope; old road, bears NE. and SW.
- 70.10 Spur, 90 ft. above draw, projects W.; descend a gradual N. slope.
- 73.70 Old road, bears N. 75° W. and S. 10° E.
- 75.90 Draw, 30 ft. below spur, drains W.; ascend a gradual SE. slope.
- 77.20 Vertical shaft, bears E., 20 lks. dist.
- 80.00 On a gradual SE. slope, 10 ft. above draw.

Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, for cor. of secs. 7, 8, 17 and 18, with brass cap marked.

T15S R10W
 S 7 | S 8
 S18 | S17

1934

of stone, 4 ft. base, 3 ft. high, W. of cor. raise a mound

Land, rough mountainous; drainage, southwesterly.

Soil, shallow sandy loam, with outcroppings of limestone and quartzite ledges, 4th rate.

Timber, scattered juniper.

Undergrowth, scattered shadscale and greasewood.

Fair grazing land.

From this sec. cor. a frame cabin, 12x12 ft., bears S. 19°30' W., 4.67 chs. dist.

N. 89°51' E., on a random line bet, secs. 8 and 17.

40.00 Set temp. sec. cor.

70.74 Intersect N. and S. line, 9 lks. N. of the cor. of secs. 8, 9, 16 and 17.

Thence

S. 80°55' W., on true line bet. secs. 8 and 17.

SUBDIVISION OF T. 15 S., R. 10 W.

Chains

- Over rough mountainous land, broken by limestone and quartzite ledges and rock, through scattered timber and undergrowth; ascend an abrupt SE. slope.
- 5.00 Spur, .70 ft. above sec. cor., projects S.; descend an abrupt W. slope.
- 7.00 Draw, 50 ft. below spur, drains S.; ascend an abrupt E. slope.
- 9.90 Spur, 100 ft. above draw, projects S.; descend a steep SW. slope.
- 21.70 Head of draw, drains SW.
- 22.70 Spur, projects SW.
- 33.60 Draw, 270 ft. below spur at 9.90 ch. ^{point} /, drains SW.; ascend a gradual SE. slope.
- 39.87 On top of spur, 60 ft. above draw: projects SW.
 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{2}$ sec. cor., with brass cap marked.
- $$\begin{array}{r} \frac{1}{2} S 8 \\ - S 17 \\ \hline 1934 \end{array}$$
- of stone, 3 ft. base, 2 ft. high, N. of cor. ^{raise a mound}
- Descend an abrupt " slope.
- 46.10 Draw, 60 ft. below $\frac{1}{2}$ sec. cor., drains S.; ascend an abrupt E. slope.
- 54.10 Spur, 130 ft. above draw, projects SW.; descend abruptly along a rolling W. slope.
- 68.40 Draw, 200 ft. below spur, drains S.; ascend a gradual SE. slope.
- 79.74 The cor. of secs. 7, 8, 17 and 18, 20 ft. above draw.
 Land, rough mountainous; drainage, southwesterly.
 Soil, shallow sandy loam, broken by limestone and quartzite ledges, and rock on the surface, 4th rate.
 Timber, scattered juniper.
 Undergrowth, scattered shadscale, sagebrush and greasewood.
 Fair grazing land.
-
- N. 89°50' W., on a random line bet. secs. 7 and 18.
- 40.00 Set temp. $\frac{1}{2}$ sec. cor.
- 80.48 Intersect W. bdy. of the Tp., 2 lks. N. of the cor. of secs. 7, 12, 13 and 18, heretofore described.
 Thence
 S. 89°51' E., on true line bet. secs. 7 and 18.

SUBDIVISION OF T. 15 S., R. 10 W.

Chains	Over rolling mountainous land, broken by limestone and quartzite outcroppings, through scattered timber and medium dense undergrowth; ascend a gradual SW. slope.
9.10	Spur, 80 ft. above sec. cor., projects S.; descend a gradual SE. slope.
26.60	Draw, 100 ft. below spur, drains S.; ascend along a rolling S. slope.
38.80	Head of wash, drains S.
40.48	On a gradual S. slope, 40 ft. above draw.
	Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground, to solid rock, and in a mound of stone, 3ft. base, to top, for $\frac{1}{2}$ sec. cor., with brass cap marked.
	$\frac{1}{2}$ S 7
	S18
	1934
	of stone, 3 ft. base, 2 ft. high, N. of cor. raise a mound
47.80	Wash, 10 lks. wide, 2 ft. deep, drains S. 20° W.
51.10	Spur, 50 ft. above $\frac{1}{2}$ sec. cor., projects SW.; descend a gradual E. slope.
54.60	Draw, 50 ft. below spur, drains S.; ascend along a rolling S. slope.
59.50	Frame cabin, 12x12 ft., bears N., approximately 10.00 chs. dist..
61.00	Small wash, drains S.
62.20	Old road, bears N. 20° W. and S. 20° E.
67.60	Small draw, drains S.
74.10	Spur, 120 ft. above draw at 54.60 ch. ^{point} /, projects S.; descend a steep SE. slope.
80.48	The cor. of secs. 7, 8, 17 and 18, 60 ft. below spur.
	Land, rolling mountainous; drainage, southwesterly.
	Soil, shallow sandy loam, with outcroppings of limestone and quartzite ledges, 4th rate.
	Timber, scattered juniper.
	Undergrowth, medium dense shadscale, sagebrush and greasewood.
	Fair grazing land.
	N. 0°04' E., bet. secs. 7 and 8.
	Over rough mountainous land, broken by outcroppings of quartzite ledges, through scattered timber and undergrowth; ascend a gradual SE. slope.
15.90	Spur, projects SW.; ascend along a gradual W. slope.

SUBDIVISION OF T. 15 S., R. 10 W.

Chains

19.00 Top of ascent, 110 ft. above sec. cor., slopes W.; descend a steep N. slope.

23.70 Draw, 40 ft. below top of ascent, drains SW.; ascend a steep SE. slope.

40.00 Head of draw, 110 ft. above draw, drains SE.

Set an iron post, 3 ft. long, 1 in. diam., over X cut in solid rock, and in a mound of stone, 5 ft. base, to top, for $\frac{1}{2}$ sec. cor., with brass cap marked.

S 7	S 8
1934	

48.20 Spur, 110 ft. above $\frac{1}{2}$ sec. cor., projects W.; descend a steep N. slope.

58.50 Draw, 110 ft. below spur, drains W.; ascend a steep SW. slope.

80.00 Head of draw, 150 ft. above draw, drains S. 10° W.

Set an iron post, 3 ft. long, 2 ins. diam., 14 ins. in the ground to solid rock, and in a mound of stone, 5 ft. base, to top, for cor. of secs. 5, 6, 7, and 8, with brass cap marked.

T15S	R10W
6	S 5
7	S 8
1934	

raise a mound of stone, 5 ft. base, 3 ft. high, W. of cor.

Land, rough mountainous; drainage, southwesterly.

Soil, shallow sandy loam, broken by outcroppings of quartzite ledges, 4th rate.

Timber, scattered juniper.

Undergrowth, scattered shadscale, greasewood and sagebrush.

Fair grazing land.

N. 89°55' E., on a random line bet. secs. 5 and 8.

40.00 Set temp. $\frac{1}{2}$ sec. cor.

79.78 Intersect N. and S. line, 5 lks. S. of the cor. of secs. 4, 5, 8 and 9.

Thence

S. 89°53' W., on true line bet. secs. 5 and 8.

Over rough mountainous land, broken by outcroppings of quartzite ledges, through scattered undergrowth; ascend an abrupt SE. slope.

2.50 Top of ascent, 40 ft. above sec. cor., slopes S.; thence along a S. slope.

6.50 Draw near head, drains S. 75° E.; ascend an abrupt E. slope.

. SUBDIVISION OF T. 15 S., R. 10 W.

Chains 18.30	Spur, 210 ft. above sec. cor., projects S. 60° E.; descend an abrupt SW. slope.
23.30	Head of draw, 10 ft. below spur, drains SE.; ascend an abrupt E. slope.
36.90	Ridge, 630 ft. above sec. cor., bears N. and S.; descend an abrupt SW. slope.
39.89	On an abrupt SW. slope, 10 ft. below ridge. Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground to solid rock, with a quartzite stone, 4x3x2 ins., marked X, deposited at the base, and in a large mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked
	$\frac{1}{4} \begin{array}{l} S 5 \\ S 8 \\ 1934 \end{array}$
59.70	Head of draw, 290 ft. below $\frac{1}{4}$ sec. cor., drains S. 20° E.; ascend an abrupt E. slope. Enter scattered juniper and mahogany, bears N. and S.
65.30	Spur, 100 ft. above head of draw, projects S.; descend a steep W. slope.
73.70	Draw, 100 ft. below spur, drains S.; ascend a gradual E. slope.
76.80	Spur, 10 ft. above draw, projects S.; descend an abrupt SW. slope.
79.78	The cor. of secs. 5, 6, 7 and 8, 80 ft. below spur. Land, rough mountainous; drainage, southeasterly. Soil, rocky, shallow sandy loam, with outcroppings of quartzite ledges, and with the surface covered with rocks, 4th rate. Timber, scattered juniper on the W. portion of the mile. Undergrowth, scattered shadscale, sagebrush, greasewood and mahogany. Fair grazing land.
	N. 89°51' W., on a random line bet. secs. 6 and 7.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
80.58	Intersect W. bdy. of the Tp., 5 lks. N. of the cor. of secs. 1, 6, 7 and 12, heretofore described. Thence S. 89°53' E., on true line bet. secs. 6 and 7. Over rolling mountainous land, broken by outcroppings of limestone and quartzite ledges, through scattered timber and undergrowth; ascend a gradual NW. slope.
2.40	Spur, 15 ft. above sec. cor., projects S. 15° W.; descend an abrupt SE. slope.
4.50	Draw, 30 ft. below spur, drains S. 20° W.; ascend an abrupt W. slope.

SUBDIVISION OF T. 15 S., R. 10 W.

- Chains
- 5.20 Vertical shaft, bears S., 64 lks. dist.
- 6.10 Incline shaft, bears N., 10 lks. dist.
- 8.00 Top of ascent, slopes SW./; ascend along a steep N. slope.
- 16.00 Saddle on spur, 130 ft. above draw, projects S. 10° E.; descend an abrupt E. slope.
- 21.30 Draw, 110 ft. below spur, drains S. 15° E.; ascend an abrupt W. slope.
- 32.50 Spur, 80 ft. above draw, projects S.; descend an abrupt E. slope.
- 35.80 Draw, 60 ft. below spur, drains S. 15° W.; ascend a gradual W. slope.
- 40.58 On top of spur, 50 ft. above draw, projects S. 15° W.
 Set an iron post, 3 ft. long, 1 in diam., 24 ins. in the ground, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked.
- $\frac{1}{4}$ $\frac{S}{S}$ $\frac{6}{7}$
- 1934
- raise a mound
- of stone, 3 ft. base, 2 ft. high, N. of cor.
- 42.40 Draw, 15 ft. below spur, drains S.; ascend a gradual W. slope.
- 45.00 Spur, 15 ft. above draw, projects SW.; descend a gradual E. slope.
- 46.50 Draw, 10 ft. below spur, drains SW.; ascend a steep W. slope; enter rough mountainous land.
- 50.00 Spur, 50 ft. above draw, projects S.; descend a steep E. slope.
- 54.00 Draw, 50 ft. below spur, drains SW.; ascend an abrupt W. slope.
- 74.80 Spur, 160 ft. above draw, projects S.; descend an abrupt E. slope.
- 80.40 Draw, 70 ft. below spur, drains S. 10° W.; ascend an abrupt W. slope.
- 80.58 The cor. of secs. 5, 6, 7, and 8, 10 ft. above draw.
- Land, rolling mountainous on the W. portion of the mile, and rough mountainous on the E. portion of the mile; drainage, southwesterly.
- Soil, shallow sandy loam, with outcroppings of limestone and quartzite ledges, 4th rate.
- Timber, scattered juniper.
- Undergrowth, scattered shadscale, sagebrush and greasewood.
- Fair grazing land.

SUBDIVISION OF T. 15 S., R. 10 W.

Chains	N. 0°09' E., on a random line bet. secs. 5 and 6.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
82.29	Intersect N. bdy. of the Tp, 26 lks. E. of the cor. of secs. 5, 6, 31 and 32, described in the field notes of the survey of T. 14 S., R. 10 W.
	Thence
	S. 0°02' E., on true line bet. secs. 5 and 6.
	Over rough mountainous land, broken by quartzite ledges, through scattered timber and undergrowth; ascend along an abrupt E. slope.
22.30	Head of draw, drains N. 15° E.; ascend an abrupt N. slope.
28.30	Ridge, 530 ft. above sec. cor., bears NW. and E.; descend an abrupt S. slope.
42.29	On an abrupt S. slope, 260 ft. below ridge.
	Set an iron post, 3 ft. long, 1 in. diam., over X cut in solid rock, and in a mound of stone, 6 ft. base, to top, for $\frac{1}{4}$ sec. cor., with brass cap marked.
	$\frac{1}{4}$ S 6 S 5 1934
	of stone, 4 ft. base, 3 ft. high, W. of cor. raise a mound
75.40	Draw, 540 ft. below $\frac{1}{4}$ sec. cor., drains S. 80° W.; ascend a steep N. slope.
78.00	Spur, 70 ft. above draw, slopes W.; descend a steep SW. slope.
82.29	The cor. of secs. 5, 6, 7 and 8, 70 ft. below top of ascent.
	Land, rough mountainous; drainage, northeasterly on the N. 28.00 chs., and southwesterly on the remainder of the mile.
	Soil, shallow sandy loam, with outcroppings of quartzite ledges, and with slide rock on the surface, 4th rate.
	Timber, scattered juniper.
	Undergrowth, scattered shadscale, sagebrush and greasewood.
	Fair grazing land.

GENERAL DESCRIPTION OF T. 15 S., R. 10 W.

The eastern and southern portion of the township is rolling desert land, with an approximate elevation of 5000 feet above sea level; the northwestern portion, known as Drum Mountains, comprising about one third of the township is rough mountainous, and attains an approximate maximum elevation of 7000 feet above sea level. The general drainage of the township is easterly in the eastern and northern portion, and southeasterly in the

GENERAL DESCRIPTION OF T. 15 S., R. 10 W.

Chains

southern portion. The soil in the valley or lower lands in the eastern and southern portions of the township is a sandy clay and gravelly loam, with some scattered rock of volcanic, quartzite and limestone formation on the surface and may be classed as 3rd rate. This soil, while it supports a medium growth of shadscale, greasewood, budsage, mountain rush and desert grass, is not suitable for cultivation by reason of its rocky character and the surface being broken by many washes and draws. The soil of the northwestern portion, or Drum Mountains, is a shallow sandy and gravelly loam, with large areas covered with sliderock and many limestone and quartzite outcroppings and may be classed as 4th rate. A scattered growth of shadscale, sagebrush, mountain rush and grass, with some scrub juniper, which has no commercial value except for fuel, is found upon these mountains.

There are several patented mining claims, in the Detroit Mining District, along the west boundary of section 6. There are also mining claim locations, shafts, and small prospects in this area, indicating that there has been considerable activity looking to the development of ore. At the time of this survey, 15 to 30 men were employed in this district on the townships immediately to the west and north, and indications were that mining operations had or were about to be resumed.

located
There is a frame cabin, 12x12 feet, in the SW $\frac{1}{4}$ of the SE $\frac{1}{4}$ of sec. 7, and a frame cabin, 12x12 feet in the NE $\frac{1}{4}$ of the NE $\frac{1}{4}$ of sec. 18. These cabins have been built and occupied by mining interests in the development of ore.

No water was noted in the township, neither were there any settlers living in the township at the time of this survey.

In general the township is suited for the grazing of sheep and cattle during the winter months and early spring months, or in the seasons when snow is available for watering purposes.

With the exception of the mining prospects already noted, no indications of coal, oil, or oilshale were observed in the township.

A main ungraded road, between Delta, Utah, and Joy situated in section 26, T. 14 S., R. 11 W., passes through the southwest portion of the township; entering the township on the south boundary near the $\frac{1}{4}$ section corner of section 35, and bearing northwesterly, leaving the township on the west boundary near the corner of sections 13, 18, 19 and 24. There are numerous old roads passable to automobiles, and used by sheepmen and miners, throughout the township.

The nearest town is Delta, Utah, which lies southeasterly approximately 25 miles distant..

The mean magnetic declination is 16°15' E.

Blank page with faint mirrored text from the reverse side of the paper.

Blank

Page

FIELD ASSISTANTS.

NAMES.	CAPACITY.
Kenneth Adams	Principal assistant
Frank Kincaid	Principal assistant
John C. Campbell	Principal assistant
Rudolph Olsen	Chairman
Max W. Powelson	Chairman
Fred L. Gadd	Chairman
Bert Madsen	Flagman
Elroy Barnes	Flagman
Jesse Bailey	Flagman
Wells Brunson	Flagman
Jess Alger	Cornerman
Harold Allen	Cornerman
David Austin	Cornerman
Robert E. Chappell	Axman
J. Kenneth Flygare	Axman
Ray R. Morgan	Axman
Paul R. Strebelt	Axman
William A. Stanley	Axman
Wallace Young	Axman
Elmer Kay	Axman
Douglas Cowan	Axman
Theodore Howard	Axman
Erwin Stratton	Axman
Donald Weirman	Axman
Ray Lunt	Axman
John Towers	Axman
Rex Iverson	Axman
Ray Hall	Axman
Darwin Larsen	Axman
Nat Stringham	Axman
Leland Greenhalgh	Axman
Floyd Utley	Axman
Lawrence Earl	Axman
Max Root	Axman
Thoren Holladay	Axman
Ernest Erickson	Axman
LeGrand Law	Axman
Ivan Bringhamst	Flagman

CERTIFICATE OF UNITED STATES SURVEYOR

Andrew Nelson, U.S. Cadastral Engineer,
Sidney R. Reese, Don Madsen and Elmo Sager,
Transitman, (temporary) C.W.A.

we, ~~his~~ Surveyor hereby certify upon honor that, in pursuance
of special instructions received from the District Cadastral Engineer for Utah

bearing date of the 13 day of December, 1933, ~~I~~ ^{we} have well, faithfully, and truly

~~our~~ ^{our} in ~~my~~ ^s own proper person, and in strict conformity with said instructions, the Manual of Surveying Instruc-
tions, and the laws of the United States, surveyed all those parts or portions of Independent resurvey
of the Third Standard Parallel South, along the south boundary of T. 15
R. 10 W.; dependent resurvey of the east boundary, and survey of the
west boundary, and subdivision of T. 15 S., R. 10 W.

of the Salt Lake
Meridian, in the State of Utah, which are represented in

the foregoing field notes as having been executed by ~~me~~ ^{US} and under ~~my~~ ^{our} direction; and that all the corners of
said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instruc-
tions, and the special written instructions of the District Cadastral Engineer for Utah

and in the specific manner described in the field notes, and that the foregoing are the original field notes of

such survey.
Certified to at
Salt Lake City, Utah
March 14, 1935

Andrew Nelson U.S. Cadastral Engineer.
Sidney R. Reese Transitman, (temporary) C.
Don Madsen ~~his~~ ^{our} Surveyor.
Elmo Sager Transitman, (temporary) C.

APPROVAL

OFFICE OF U. S. SUPERVISOR OF SURVEYS,
Denver, Colorado APR 26, 1935

The foregoing field notes of the survey of Independent resurvey of the Third
Standard Parallel South, along the south boundary of T. 15 S., R. 10 W.;
dependent resurvey of the east boundary, and survey of the west
boundary, and subdivision of T. 15 S., R. 10 W.

Andrew Nelson, U.S. Cadastral Engineer, Sidney R. Reese, Don Madsen and Elmo Sager, Transitman, (temporary) C.W.A.

executed by ~~me~~ ^{their} special instructions dated December 13, 1933, having been
critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys
they describe, are hereby approved.

Donald H. Johnson
U. S. Supervisor of Surveys.

I certify that the foregoing transcript of the field notes of the above described survey is the 35 C.W.A.
30 W. Utah, has been correctly copied from the original notes on file in this office.

Blank

Page

Blank

Page

BOOK A-506

"A"

FIELD NOTES

OF THE ~~SURVEY OF THE~~

~~DEPENDENT RESURVEY OF THE SOUTH, EAST AND WEST BOUNDARIES,~~

~~INDEPENDENT RESURVEY OF THE NORTH BOUNDARY~~

~~AND SURVEY OF THE SUBDIVISION OF~~

~~T. 18 S., R. 11 W.~~

Of the SALT LAKE Meridian,

In the State of UTAH

EXECUTED BY

Sidney R. Reese, Don Madsen and Elmo Sager, Transitmen (Temporary) CWA

Under special instructions dated December 15th, 19 33, which provided
for the surveys included under Group No. 255, bearing the approval of the
Commissioner of the General Land Office under date of February 2nd, 1934
and assignment instructions dated December 20th, 19 33

Survey commenced December 28th, 19 33

Survey completed January 26th, 19 34

INDEX DIAGRAM.

		Township 18 SOUTH			Range 11 WEST				
		37	35	34	33	32	30		
22	29	86	85	74	64	54	45	10	1
		86	85	73	63	53	44		
22	27	84	82	72	63	52	44	9	2
		83	82	71	62	52	43		
21	26	82	80	70	61	51	42	7	2
		81	80	69	60	50	42		
21	25	79	78	68	59	49	41	6	2
		79	78	68	58	49	40		
21	23	77	76	67	57	48	40	5	3
		76	76	66	56	47	39		
20	22	74	74	65	54	46	38	3	3
		19	18	17	15	14	13		
		13	13	12	12	12	11		

T. 18 S., R. 11 W., Salt Lake Meridian, Utah

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

All lines colored in black were surveyed by Sidney R. Reese, Temporary Transitman.

All lines colored in red were surveyed by Don Madsen, Temporary Transitman.

All lines colored in green were surveyed by Elmo Sager, Temporary Transitman.

Blank

Page

TOWNSHIP 18 SOUTH, RANGE 11 WEST.

Chains

Survey commenced December 28, 1933, and executed with Buff and Buff light mountain transits Nos. 8028 and 9978, and Young and Sons light mountain transit No. 8517, used by Sidney R. Reese, Don Madsen, and Elmo Sager, Temporary Transitmen, C.W.A., respectively. Each instrument is equipped with Smith solar attachment and full vertical circle; the horizontal limb of each transit is provided with two double verniers, placed opposite to each other and reading to single minutes of arc, which is also the least count of the verniers of the latitude and declination arcs and vertical circles. These instruments were approved for use on this survey by the district cadastral engineer for Utah, conditional upon satisfactory field tests as stated in assignment instructions dated December 20, 1933.

The instruments were in good condition at the time of this survey, and all adjustments were in good order. The country over which the lines are to be extended is all open desert, therefore, the solar attachments are not used, and all azimuths in this record are referred to true meridians determined by observations made upon Polaris during the progress of the survey, by the method of deflection angles and calculated courses, and the lines were carried forward by double fore and back sights.

The measurements were made with Lallie steel ribbon tapes, 5 chains and 8 chains in length; each tape is graduated every link for the first 100 links, and thereafter at intervals of 10 links. The tapes were tested by comparison with a Lufkin steel standard tape and found correct. The measurements were made on the slope; the vertical angles were determined by clinometers in good adjustment, two to each tape; the field notes show the horizontal equivalents.

December 28, 1933, at the cor. of Tps. 17 and 18 S., Rs. 10 and 11 W., in approximate latitude 39°17'N., longitude 113°02'W., at 11h 39m 12s a.m. by my watch, which reads correct 105th meridian time as compared by a Western Union clock, at Delta, Utah, December 27, 1933, we make an hour angle observation on Polaris east of the meridian, two each with the telescope in direct and reversed positions, reading the horizontal deflection angle from Polaris west to reference point, which is a well defined point on the sky line, approximately 8 miles distant to the north.

Watch fast of l.m.t. -----	32.1m
Local mean time of observation-----	11h 07.1m a.m.
Mean horizontal angle, Polaris to reference point -----	1° 08.5'
Azimuth of Polaris -----	1° 08.5' E
True bearing of reference point -----	North.

DEPENDENT RESURVEY OF EAST BDY. T. 18 S., R. 11 W.

Reestablishment of the surveys executed by Joseph Gorlinski, U.S. Deputy Surveyor, in 1879, and subsequently resurveyed by G.O. Chaney, U.S. Deputy Surveyor, in 1891.

Random Lines

From the corner of Tps. 17 and 18 S., Rs. 10 and 11 W., hereinafter described.

S.0°42'E., bet. sec. 1 and 6.

40.22

Fall 2 lks. W. of the $\frac{1}{4}$ sec. cor. of secs. 1 and 6, hereinafter described.

DEPENDENT RESURVEY OF EAST BDY. T. 18 S., R. 11 W.

Chains

The course of this half mile therefore is S.0°44'E., and the distance is 40.22 chs.

S.0°42'E., on same line, with continuous measurement.

- 80.52 Fall 3 lks. W. of the cor. of secs. 1, 6, 7, and 12, hereinafter described.

The course of this half mile therefore is S.0°45'E., and the distance is 40.30 chs.

From a point 3 lks. W. of the cor. of secs. 1, 6, 7, and 12.

S.0°42'E., bet. secs. 7 and 12.

- 40.21 Fall 1 lk. W. of the $\frac{1}{4}$ sec. cor. of secs. 7 and 12, hereinafter described.

The course of this half mile therefore is S.0°40'E., and the distance is 40.21 chs.

Continue on same line, with continuous measurement.

- 80.47 Fall 6 lks. W. of the cor. of secs. 7, 12, 13, and 18, hereinafter described.

The course of this half mile therefore is S.0°46'E., and the distance is 40.26 chs.

From a point 6 lks. W. of the cor. of secs. 7, 12, 13, and 18.

S.0°42'E., bet. secs. 13 and 18.

- 40.33 Fall 6 lks. W. of the $\frac{1}{4}$ sec. cor. of secs. 13 and 18, hereinafter described.

The course of this half mile therefore is S.0°42'E., and the distance is 40.33 chs.

Continue on same line, with continuous measurement.

- 80.65 Fall 6 lks. W. of the cor. of secs. 13, 18, 19, and 24, hereinafter described.

The course of this half mile therefore is S.0°42'E., and the distance is 40.32 chs.

From a point 6 lks. W. of the cor. of secs. 13, 18, 19, and 24.

S.0°42'E., bet. secs. 19 and 24.

- 40.00 No evidence of the $\frac{1}{4}$ sec. cor. of secs. 19 and 24 could be found.

Chains

Continue on same line, with continuous measurement..

80.50 Intersect the cor. of secs. 19, 24, 25, and 30, hereinafter described.

The course of this mile therefore is S. 0°40' E., and the proportional dist. of each half mile is 40.15' chs.

From the cor. of secs. 19, 24, 25, and 30.

S. 0°42' E., bet. secs. 25 and 30.

40.45 Fall $\frac{1}{2}$ lks. E. of the $\frac{1}{4}$ sec. cor. of secs. 25 and 30, hereinafter described.

The course of this half mile therefore is S. 0°40' E., and the distance is 40.45 chs.

Continue on same line, with continuous measurement..

80.66 Intersect the cor. of secs. 25, 30, 31, and 36, hereinafter described.

The course of this half mile therefore is S. 0°44' E., and the distance is 40.21 chs.

From the cor. of secs. 25, 30, 31, and 36.

S. 0°42' E., bet. secs. 31 and 36.

40.17 Fall 7 lks. E. of the $\frac{1}{4}$ sec. cor. of secs. 31 and 36, hereinafter described.

The course of this half mile, therefore is S. 0°36' E., and the distance is 40.17 chs.

Continue on same line, with continuous measurement..

80.31 Fall 6 lks. E. of the cor. of Tps. 18 and 19 S., Rs. 10 and 11 W., hereinafter described.

The course of this half mile, therefore is S. 0°41' E., and the distance is 40.14 chs.

True Lines.

From the cor. of Tps. 18 and 19 S., Rs. 10 and 11 W., which is a limestone, 12x9x5 ins. above ground, firmly set in the ground, marked 6 notches on N., S., E., and W. edges, unwitnessed.

At point for cor.

Set an iron post, 3 ft. long, 3 ins. diam., 30 ins. in the ground, with original cor. monument deposited alongside, for the cor. of Tps. 18 and 19 S., Rs. 10 and 11 W., with brass cap marked

Chains

T188	
R11W	R10W
S36	S31
S1	S6
T193	

1933

raise a

mound of stone, 3 ft. base, 3 ft. high, S. of cor.

Thence

N. 0°41' W., bet. secs. 31 and 36.

Over gently rolling land, through medium dense undergrowth.

29.00 N. edge of rise, bears NW. and SE.; descend gentle NE. slope, 20 ft. to $\frac{1}{4}$ sec. cor.

40.14 On gently rolling land.

The original $\frac{1}{4}$ sec. cor. of secs. 31 and 36, which is a quartzite stone, 16x10x8 ins., firmly set in the ground, and marked $\frac{1}{4}$ on W. face. Cor. has no accessories.

At point for cor.

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, with the original cor. monument deposited alongside, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$	
S36	S31
1933	

raise a

mound of stone, 2 ft. base, 18 ins. high, W. of cor.

Thence N. 0°36' W., with continuous measurement.

80.31 On gently rolling land.

The original cor. of secs. 25, 30, 31, and 36, which is a limestone, 14x8x6 ins., firmly set in the ground, and marked with 5 notches on N. edge, and 1 notch on S. edge. Corner has no accessories.

At point for cor.

Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, with the original cor. monument deposited alongside, for cor. of secs. 25, 30, 31, and 36, with brass cap marked

T188	
R11W	R10W
S25	S30
S36	S31

1933

raise a

mound of stone, 2 ft. base, 18 ins. high, W. of cor.

Chains

Land, gently rolling, with a general easterly exposure, and drainage.

Soil, heavy clay, 3rd rate.

No timber.

Undergrowth, medium dense shadscale, and scattered greasewood.

Fair growth of browse for grazing.

N. 0°44' W., along the W. bdy. of sec. 30.

Over gently rolling land, through medium dense undergrowth.

38.80 Dry wash, 30 lks. wide, 4 ft. deep, drains N. 80° E.,

40.00 On gently rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ sec. cor., sec. 25 only, with brass cap mkd.

$\frac{1}{4}$
S25
1934

raise a mound of stone, 2 ft. base, 18 ins. high, W. of cor.

40.21 The original $\frac{1}{4}$ sec. cor. of secs. 25 and 30, which is a quartzite stone, 12x12x5 ins., firmly set in the ground, mkd $\frac{1}{4}$ on W. face. Corner has no accessories.

At point for cor.

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, with the original cor. deposited alongside, for $\frac{1}{4}$ sec. cor., sec. 30 only, with brass cap mkd.

$\frac{1}{4}$
S30
1933

raise a mound of stone, 2 ft. base, 18 ins. high, E. of cor.

Thence

N. 0°40' W., with continuous measurement.

80.00 On gently rolling land.

Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, for cor. of secs. 24 and 25 only, with brass cap mkd.

T18S | T18S
R10W | R10W
S24 | S30
S25
R11W

1934

raise a mound of stone, 2 ft. base, 18 ins. high, W. of cor.

Chains

and 210

80.66 The original cor. of secs. 19, 24, 25, and 30, which is a limestone, 14x10x8 ins., firmly set in the ground, mkd. 4 notches on N. edge, and 2 notches on S. edge. Corner has no accessories.

At point for cor.

Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, with the original cor. deposited alongside, for cor. of secs. 19 and 30 only, with brass cap mkd.

T18S	T18S
R11W	S19
S24	S30
	R10W

1933

raise a

mound of stone, 2 ft. base, 18 ins. high, E. of cor.

Land, gently rolling, with a general easterly exposure, and drainage.

Soil, heavy clay, 3rd rate.

No timber.

Undergrowth, medium dense shadscale and greasewood.

Fair growth of browse for grazing.

N. 0°40' W., along the W. bdy. of sec. 19.

Over gently rolling land, through medium dense undergrowth.

39.34 Near S. bank of wash, and a northing of 40.00 chs., from the cor. of secs. 24 and 25.

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{2}$ sec. cor., sec. 24 only, with brass cap mkd.

$\frac{1}{4}$
S24

1934

raise a

mound of stone, 2 ft. base, 18 ins. high, W. of cor.

39.80 Soap Wash, 20 lks. wide, 5 ft. deep, drains S. 42° E.

40.15 Proportionate point, on north bank of wash.

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for restored $\frac{1}{2}$ sec. cor., sec. 19 only, with brass cap mkd.

$\frac{1}{4}$
S19

1934

raise a

mound of stone, 2 ft. base, 18 ins. high, E. of cor.


Chains

Continue

On same line, with continuous measurement.

79.34 On gently rolling land, with a northing of 80.00 chs. from the cor. of secs. 24 and 25.

Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, for the cor. of secs. 13 and 24 only, with brass cap mkd.




raise a mound of stone, 2 ft. base, 18 ins. high, W. of cor.

80.30 The original cor. of secs. 13, 18, 19, and 24, which is a limestone, 16x10x4 ins., firmly set in the ground, mkd. 3 notches on N. and S. edges. Corner has no accessories.

At point for cor.

Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, with the original cor. monument deposited alongside, for cor. of secs. 18 and 19 only, with brass cap mkd.



raise a mound of stone, 2 ft. base, 18 ins. high, E. of cor.

Land, gently rolling, with a general easterly exposure and drainage.

Soil, heavy clay, 3rd rate.

No timber.

Undergrowth, medium dense shadscale, and scattered greasewood.

Fair growth of browse for grazing.

N. 0°42' W., along the W. bdy. of sec. 18.

Over gently rolling land, through medium dense undergrowth.

39.04 On gently rolling land, with a northing of 40.00 chs. from the cor. of secs. 13 and 24.

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ sec. cor., sec. 13 only, with brass cap mkd.

Chains

and on

↑	S18
S13	
1934	

raise a

mound of stone, 2 ft. base, 18 ins. high, W. of cor.

40.32 The original $\frac{1}{2}$ sec. cor. of secs. 13 and 18, which is a quartzite stone, 12x12x6 ins., firmly set in the ground, mkd. on W. face. Corner has no accessories.

At point for cor.

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, with the original cor. monument deposited alongside, for $\frac{1}{2}$ sec. cor., sec. 18 only, with brass cap mkd.

↑
S18
1933

raise a

mound of stone, 2 ft. base, 18 ins. high, E. of cor.

Continue

On same line, continuous measurement.

79.04 On gently rolling land, with a northing of 80.00 chs. from the cor. of secs. 13 and 24.

Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, for the corner of secs. 12 and 13 only, with brass cap mkd

T18S	T18S
S12	R10W
S13	S18
R11W	
1934	

raise a

mound of stone, 2 ft. base, 18 ins. high, W. of cor.

80.85 The original cor. of secs. 7, 12, 13, and 18, which is a limestone, 14x10x6 ins., firmly set in the ground, mkd. 4 notches on S. edge, and 2 notches on N. edge. Corner has no accessories.

At point for cor.

Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, with the original cor. monument deposited alongside, for cor. of secs. 7 and 18 only, with brass cap mkd.

T18S	T18S
R11W	S7
S12	S18
	R10W
1934	

raise a

Chains


mound of stone, 2 ft. base, 18 ins. high, E. of cor.
 Land, gently rolling, with a general easterly exposure and drainage.
 Soil, heavy clay, 3rd rate.
 No timber.
 Undergrowth, medium dense shadscale and greasewood.
 Fair growth of browse for grazing.

N. 0°46' W., along the W. bdy. of sec. 7.

Over gently rolling land, through medium dense undergrowth.

38.39 On gently rolling land, with a northing of 40.00 chs. from the cor. of secs. 12 and 13.

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ sec. cor., sec. 12 only, with brass cap mkd.




raise a

mound of stone, 2 ft. base, 18 ins. high, W. of cor.

40.26 The original $\frac{1}{4}$ sec. cor. of secs. 7 and 12, which is a quartzite stone, 12x12x5 ins., firmly set in the ground, mkd. $\frac{1}{4}$ on W. face. Corner has no accessories.

At point for cor.

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, with the original cor. monument deposited alongside, for $\frac{1}{4}$ sec. cor., sec. 7 only, with brass cap mkd.



raise a

mound of stone, 2 ft. base, 18 ins. high, E. of cor.

Thence

N. 0°40' W., with continuous measurement.

74.50 Dry wash, 2 chs. wide, drains S. 80° E.

78.39 On gently rolling land, with a northing of 80.00 chs. from the cor. of secs. 12 and 13.

Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, for the cor. of secs. 1 and 12 only, with brass cap mkd.

Chains

T18S	T18S
S1	R10W
S12	S7
R11W	

1934

Raise a

mound of stone, 2 ft. base, 18 ins. high, W. of cor.

80.47 The original cor. of secs. 1, 6, 7, and 12, which is a limestone, 12x10x6 ins., firmly set in the ground, mkd. 5 notches on S. edge, and 1 notch on N. edge. Corner has no accessories.

At point for cor.

Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, with the original cor. monument deposited alongside, for cor. of secs. 6 and 7 only, with brass cap mkd.

T18S	T18S
R11W	S6
S1	S7
	R10W

1934

raise a

mound of stone, 2 ft. base, 18 ins. high, E. of cor.

Land, gently rolling, with a general easterly exposure and drainage.

Soil, heavy clay, 3rd rate.

No timber.

Undergrowth, medium dense shadscale and greasewood.

Fair growth of browse for grazing.

N. 0°43' W., along the W. bdy. of sec. 6.

Over gently rolling land, through medium dense undergrowth

37.92 On gently rolling land, with a northing of 40.00 chs. from the cor. of secs. 1 and 12.

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ sec. cor., sec. 1 only, with brass cap mkd.

$\frac{1}{4}$

S1

1934

raise a


mound of stone, 2 ft. base, 18 ins. high, W. of cor.

40.30 The original $\frac{1}{4}$ sec. cor. of secs. 1 and 6, which is a quartzite stone, 12x6x4 ins., firmly set in the ground, mkd. $\frac{1}{4}$ on W. face. Corner has no accessories.

Chains

At point for cor.

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, with the original cor. monument deposited alongside, for $\frac{1}{4}$ sec. cor., sec 6 only, with brass cap mkd.



raise a mound of stone, 2 ft. base, 18 ins. high, E. of cor.

Thence

N. 0°44' W., with continuous measurement.

53.40


Old road bet. Delta, Utah, and Ely, Nevada, bears N. 75° W., and S. 75° E.

80.52

The original cor. of Tps. 17 and 18 S., Rs. 10 and 11 W., which is a quartzite stone, 14x10x6 ins., firmly set in the ground, mkd 6 notches on N., S., E., and W. edges. Corner has no accessories.

At point for cor.

Set an iron post, 3 ft. long, 3 ins. diam., 30 ins. in the ground, with the original cor. monument deposited alongside, for the cor. of Tps. 17 and 18 S., Rs. 10 and 11 W., with brass cap mkd.



raise a mound of stone, 3 ft. base, 2 ft. high, S. of cor.

Land, gently rolling, with a general easterly exposure and drainage.

Soil, heavy clay, 3rd rate.

No timber.

Undergrowth, medium dense shadscale and greasewood.

Fair growth of browse for grazing.

DEPENDENT RESURVEY OF THE SOUTH BDY. T. 18 S., R. 11 W.

"Reestablishment of the surveys executed by Joseph Gorlinski, U.S. Deputy Surveyor, in 1880."

Random Lines.

From the cor. of Tps. 18 and 19 S., Rs. 10 and 11 W., heretofore described.

West, bet. secs. 1 and 36.

DEPENDENT RESURVEY OF THE SOUTH BDY. T. 16 S., R. 11 W.

Chains	
40.18	<p>Fall 64 lks. N. of the original $\frac{1}{4}$ sec. cor. of secs. 1 and 36, hereinafter described.</p> <p>The course of this half mile, therefore, is S. 89° 05' W. and the distance is 40.19 chs.</p> <p>Continue on same line with continuous measurement.</p>
80.38	<p>Fall 101 lks. N. of the cor. of secs. 1, 2, 35, and 36, hereinafter described.</p> <p>The course of this half mile, therefore, is S. 89° 28' W. and the distance is 40.20 chs.</p>
<p>From the cor. of secs. 1, 2, 35, and 36, West, bet. secs. 2 and 35.</p>	
40.17	<p>Fall 46 lks. N. of the $\frac{1}{4}$ sec. cor. of secs. 2 and 35, hereinafter described.</p> <p>The course of this half mile, therefore, is S. 89° 20' W., and the distance is 40.17 chs.</p> <p>Continue on same line with continuous measurement.</p>
80.39	<p>Fall 106 lks. N. of the cor. of secs. 2, 3, 34, and 35, hereinafter described.</p> <p>The course of this half mile, therefore, is S. 89° 08' W. and the distance is 40.22 chs.</p>
<p>From the cor. of secs. 2, 3, 34, and 35. West, bet. secs. 3 and 34.</p>	
39.99	<p>Fall 55 lks. N. of the $\frac{1}{4}$ sec. cor. of secs. 3 and 34, hereinafter described.</p> <p>The course of this half mile, therefore, is S. 89° 13' W. and the distance is 39.99 chs.</p> <p>Continue on same line with continuous measurement.</p>
80.12	<p>Fall 77 lks. N. of the cor. of secs. 3, 4, 33, and 34, hereinafter described.</p> <p>The course of this half mile, therefore, is S. 89° 41' W., and the distance is 40.13 chs.</p>
<p>From the cor. of secs. 3, 4, 33, and 34. West, bet. secs. 4 and 33.</p>	
40.14	<p>Fall 34 lks. N. of the $\frac{1}{4}$ sec. cor. of secs. 4 and 33, hereinafter described.</p> <p>The course of this half mile, therefore, is S. 89° 31' W., and the distance is 40.14 chs.</p> <p>Continue on same line with continuous measurement.</p>
80.15	<p>Fall 133 lks. N. of the cor. of secs. 4, 5, 32, and 33,</p>

Chains

hereinafter described.

The course of this half mile, therefore is S. 88° 35' W., and the distance is 40.02 chs.

From the cor. of secs. 4, 5, 32, and 33.

West, bet. secs. 5 and 32.

40.09 Fall 50 lks. N. of the $\frac{1}{4}$ sec. cor. of secs. 5 and 32, hereinafter described.

The course of this half mile, therefore is S. 89° 17' W., and the distance is 40.09 chs.

Continue on same line with continuous measurement.

80.31 Fall 96 lks. N. of the cor. of secs. 5, 6, 31 and 32, hereinafter described.

The course of this half mile, therefore is S. 89° 20' W., and the distance is 40.22 chs.

From the cor. of secs. 5, 6, 31, and 32.

West, bet. secs. 6 and 31.

40.08 Fall 56 lks. N. of the $\frac{1}{4}$ sec. cor. of secs. 6 and 31, hereinafter described.

The course of this half mile therefore is S. 89° 12' W., and the distance is 40.08 chs.

Continue on same line with continuous measurement.

80.33 Fall 106 lks. N. of the cor. of Tps. 18 and 19 S., Rs. 11 and 12 W., hereinafter described.

The course of this half mile therefore is S. 89° 17' W., and the distance is 40.25 chs.

True Lines

From the cor. of Tps. 18 and 19 S., Rs. 10 and 11 W., heretofore described.

S. 89° 05' W., bet. secs. 1 and 36.

Over gently rolling land, through medium dense undergrowth.

40.19 On gently rolling land.


The original $\frac{1}{4}$ sec. cor. of secs. 1 and 36, which is a limestone, 10x8x2 ins., firmly set in the ground, mkd. $\frac{1}{4}$ on N. face. Corner has no accessories.

At point for cor.

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, with the original cor. monument deposited alongside, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

Chains

antiaft



1933

raise a

mound of stone, 2 ft. base, 2 ft. high, N. of cor.

Thence

S. 89° 28' W., with continuous measurement.

79.59 Road, bears N. 71° W., and S. 71° E.

80.39 On gently rolling land.

The original cor. of secs. 1, 2, 35, and 36, which is a quartzite stone, 10x7x4 ins., firmly set in the ground, mkd. 5 notches on W. edge, and 1 notch on E. edge. Cor. has no accessories.

At point for cor.

Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, with the original cor. monument deposited alongside, for cor. of secs. 1, 2, 35, and 36, with brass cap mkd.

T18S	R11W
S35	S36
S2	S1
T19S	
1933	

raise a

mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Land, gently rolling, with a general easterly exposure and drainage.

Soil, clay, 3rd rate.

No timber.

Undergrowth, medium dense shadscale and greasewood.

Fair browse for grazing.

S. 89°20' W., bet. secs. 2 and 35.

Over gently rolling land, through medium dense undergrowth.

29.10 Wash, 10 lks. wide, 3 ft. deep, drains N. 75° E.

37.00 Same wash, drains S. 60° E.

40.17 On gently rolling land.

The original $\frac{1}{2}$ sec. cor. of secs. 2 and 35, which is a limestone, 10x10x10 ins., firmly set in the ground, mkd. $\frac{1}{2}$ on N. face. Corner has no accessories.

At point for cor.

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in

Chains

the ground, with the original cor. monument, deposited alongside, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$\frac{1}{4}$ S35
S2
1933

raise a

mound of stone, 3 ft. base, 2 ft. high, N. of cor.

Thence

S. 89°08' W., with continuous measurement.

Ascend a gradual E. slope.

80.39 On a gradual E. slope, 80 ft. above $\frac{1}{4}$ sec. cor.

The original cor. of secs. 2, 3, 34, and 35, which is a limestone, 14x8x4 ins., firmly set in the ground, mkd. 4 notches on W. edge, and 2 notches on E. edge, witnessed by a small mound of stone W.

At point for cor.

Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, with the original cor. monument deposited alongside, for the cor. of secs. 2, 3, 34, and 35, with brass cap mkd.

T18S | R11W
S34 | S35
S3 | S2
T19S
1934

raise a

mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Land, gently rolling, with a general easterly exposure and drainage.

Soil, sandy and clay loam, 3rd rate.

No timber.

Undergrowth, medium dense shadscale and greasewood.

Fair growth of browse for grazing.

S. 89°13' W., bet. secs. 3 and 34.

Over rolling land, through medium dense undergrowth; ascend a gradual E. slope.

20.00 Base of low rolling hills, bears N. and S.

39.60 Spur, 290 ft. above sec. cor., projects N. 17° E., from SW.

39.99 On spur.

The original $\frac{1}{4}$ sec. cor. of secs. 3 and 34, which is a limestone, 16x10x4 ins., firmly set in a mound of stone, mkd. $\frac{1}{4}$ on N. face.

DEPENDENT RESURVEY OF THE SOUTH BDY. T. 18 S., R. 11 W.

Chains

211240

At point for cor.

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, with the original cor. monument deposited alongside, for sec. cor., with brass cap mkd

S34
 $\frac{1}{2}$ —————
 S3
 1933

raise a

mound of stone, 3 ft. base, 2½ ft. high, N. of cor.

Thence

S. 89°41'W., with continuous measurement.

Descend a gradual NW. slope.

- 40.50 Draw near head, 90 ft. below spur, drains N. 10° E., approximately 20.00 chs. dist., thence N. 70° E.; ascend a steep E. slope.
- 57.00 Spur, 70 ft. above draw, projects N., approximately 10.00 chs. dist.; descend a gradual SW. slope.
- 60.60 Draw, 40 ft. below spur, drains N., approximately 15.00 chs. dist., thence E.; ascend a gradual E. slope.
- 65.00 Ridge, 50 ft. above draw, bears NW. and SE.; also road along ridge; descend a rolling SW. slope.
- 74.20 Draw near head, drains S. 10° W.
- 75.90 Spur, projects S. 10° W.
- 78.20 Draw, drains S. 10° W.
- 80.12 On gradual SE. slope, 130 ft. below ridge.

The original cor. of secs. 3, 4, 33, and 34, which is a limestone, 14x6x4 ins., firmly set in the ground, mkd. 3 notches on E. and W. edges. Corner has no accessories.

At point for cor.

Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, with the original cor. monument deposited alongside, for the cor. of secs. 3, 4, 33, and 34, with brass cap marked

T18S | R11W
 S33 | S34
 S4 | S3
 T19S
 1934

raise a

mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Land, rolling on the E, 20.00 chs., low rolling hills on the W. 60.00 chs., with a general easterly exposure and drainage on the E. half mile, northerly on the next 25.00 chs., and southwesterly on the W, 15.00 chs.

Soil, gravelly, 3rd rate.

No timber.

Chains

Undergrowth, medium dense shadscale and greasewood.
Fair browse for grazing.

S. 89°31' W., bet. secs. 4 and 33.

Over low rolling hills, through medium dense undergrowth; ascend a gradual SE. slope.

- 1.00 Low spur, 20 ft. above sec. cor., projects S. 15° W.; also road along spur, bears N. 15° E., and S. 15° W.; descend a gradual W. slope.
- 12.10 Small draw, 70 ft. below spur, drains S. 15° W.; ascend a gradual E. slope.
- 17.60 Low spur, 70 ft. above draw, projects S. 15° W.; descend a gradual W. slope.
- 22.60 Small draw, 10 ft. below spur, drains S. 15° W.; ascend a gradual E. slope.
- 30.00 Point of spur, 80 ft. above draw, projects S.; descend a gradual W. slope.
- 35.00 Base of low hills, bears N. and S., thence over gently rolling land.
- 40.14 On-gently rolling land, 30 ft. below point of spur.

The original $\frac{1}{4}$ sec. cor. of secs. 4 and 33, which is a limestone, 14x8x7 ins., firmly set in the ground, mkd $\frac{1}{4}$ on N. face. Corner has no accessories.

At point for cor.

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, with the original cor. monument deposited alongside, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

333
+ —————
S4
1934

raise a

mound of stone, 2 ft. base, 2 ft. high, N. of cor.

Thence

S. 88°35' W., with continuous measurement.

- 80.16 On gently rolling land.

The original cor. of secs. 4, 5, 32, and 33, which is a limestone, 14x8x6 ins., mkd. 4 notches on E. edge, and 2 notches on W. edge. Corner has no accessories.

At point for cor.

Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, with the original cor. monument deposited alongside, for cor. of secs. 4, 5, 32, and 33, with brass cap mkd.

Chains

T19S	R11W
S32	S33
S35	S34
T19S	
1934	

antim00

raise a

mound of stone, 2½ ft. base, 2 ft. high, W. of cor.

Land, low rolling hills on the E. half mile, and gently rolling on the W. half mile, with a southwesterly exposure and drainage.

Soil, gravelly and clay loam, 3rd rate.

No timber.

Undergrowth, medium dense shadscale and greasewood.

Fair growth of browse for grazing.

S. 89°17' W., bet. secs. 5 and 32.

Over gently rolling land, through medium dense undergrowth.

2.00 Road, bears N. 80° W. and S. 80° E.

40.09 On gently rolling land.

The original ¼ sec. cor. of secs. 5 and 32, which is a basalt rock, 12x5x5 ins., firmly set in the ground, mkd. ¼ on N. face. Corner has no accessories.

At point for cor.

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, with the original cor. monument deposited alongside, for ¼ sec. cor., with brass cap mkd.

S32

¼ —————

S5

1934

raise a

mound of stone, 2 ft. base, 2 ft. high, N. of cor.

Thence

S. 89°20' W., with continuous measurement.

59.90 Wash, 10 lks. wide, 3 ft. deep, drains S. 60° W.

80.31 On gently rolling land.

The original cor. of secs. 5, 6, 31, and 32, which is a limestone, 10x5x4 ins., firmly set in the ground, mkd. 5 notches on E. edge, and 1 notch on W. edge. Corner has no accessories.

At point for cor.

Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in

DEPENDENT RESURVEY OF SOUTH BDY. T. 18 S., R. 11 W.

Chains

the ground; with the original cor. monument deposited alongside, for cor. of secs. 5, 6, 31, and 32, with brass cap marked

T18S	R11W
S31	S32
S6	S5
T19S	
1934	

raise a mound of stone, 2½ ft. base, 2 ft. high, W. of cor.

Land, gently rolling, with a general northwesterly exposure, and drainage on E. half mile, and southwesterly on W. half mile.

Soil, gravel and clay loam; 3rd rate.

No timber.

Undergrowth, medium dense shadscale and greasewood.

Fair growth of browse for grazing.

S.89°12'W., bet. secs. 6 and 31.

Over rolling land, through medium dense undergrowth; ascend a gentle E. slope.

20.80 Top of rise, bears N. and S., 30 ft. above sec. cor.; descend a gentle W. slope.

40.08 On gentle W. slope, 10 ft. below rise.

The original ¼ sec. cor. of secs. 6 and 31, which is a limestone, 10x10x6 ins., firmly set in the ground, mkd. ¼ on N. face. Corner has no accessories.

At point for cor.

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, with the original cor. monument deposited alongside, for ¼ sec. cor., with brass cap marked

S 31
S 6

raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.

Thence

S.89°17'W., with continuous measurement.

46.00 Road, bears N. 60°E., and S.60°W.

80.33 On rolling land.

The original cor. of Tps. 18 and 19 S., Rs. 11 and 12 W., which is a limestone, 14x8x6 ins., firmly set in the ground, marked 6 nothces on N., S., E., and W. edges; witnessed by a small mound of stone south.

At point for cor.

DEPENDENT RESURVEY OF SOUTH BDY. T. 18 S., R. 11 W.

Chains

Set an iron post, 3 ft. long, 3 ins. diam., 30 ins. in the ground, with the original cor. monument deposited alongside, for the cor. of Tps. 18 and 19 S., Rs. 11 and 12 W., with brass cap marked

T18S	
R12W	R11W
S36	S31
S1	S6
T19S	
1934	

raise a mound of stone, 4 ft. base, 3 ft. high, S. of cor.

Land, rolling, with a southwesterly exposure and drainage

Soil, gravel and clay loam; 3rd rate.

No timber.

Undergrowth, medium dense shadscale and greasewood.

Fair growth of browse for grazing.

January 4, 1934, at the cor. of Tps. 18 and 19 S., Rs. 11 and 12 W., in approximate latitude 39°12'N., longitude 113°08'30"W., at 12h 26m 48s p.m. by my watch, which reads correct 105th meridian time as compared by a Western Union clock, at Delta, Utah, January 3, 1934, I make an hour angle observation on Polaris east of the meridian, two each with the telescope in direct and reversed positions, reading the horizontal deflection angle from Polaris west to a flag north approximately half mile distant.

Watch fast of l.m.t. -----	32.6m
Local mean time of observation -----	11h 54.2m a.m.
Mean horizontal angle, Polaris to flag-----	1° 19.0'
Azimuth of Polaris -----	1° 18.5' E.
True bearing of flag -----	N.0° 00.5'W.

From the above reference flag, I deflect an angle of 89°17' to the right, to a flag left at the 1/4 sec. cor. of secs. 6 and 31, therefore, the bearing is N.89°17'E., which checks the true bearing of the line just run.

DEPENDENT RESURVEY OF THE SECOND GUIDE MERIDIAN WEST, THROUGH T. 18 S., BET. RS. 11 AND 12 WEST.

Reestablishment of the surveys executed by Joseph Gorinski, U.S. Deputy Surveyor, in 1880, and subsequently resurveyed by A.J. Stewart, Jr., U.S. Deputy Surveyor, in 1885.

Random Lines

From the corner of Tps. 18 and 19 S., Rs. 11 and 12 W., heretofore described.

North, bet. secs. 31 and 36.

40.06

Fall 43 lks. E. of the 1/4 sec. cor. of secs. 31 and 36, hereinafter described.

The course of this half mile therefore is N.0°37'W., and the distance is 40.06 chs.

DEPENDENT RESURVEY OF THE SECOND GUIDE MERIDIAN WEST,
THROUGH T. 18 S., BET. RS. 11 AND 12 W.

Chains

Continue on same line with continuous measurement.

80.06 No evidence of the original cor. of secs. 25, 30, 31, and 36 could be found.

Set temp. point.

From the temp. point for secs. 25, 30, 31, and 36.

North, on the same line, bet. secs. 25 and 30.

39.78 Fall 45 lks. E. of the cor. of secs. 25 and 30, hereinafter described.

The course of this mile therefore is N. 0°01' W., and the proportionate distance for each half mile is 39.89 chs.

Continue on same line with continuous measurement.

79.78 No evidence of the original cor. of secs. 19, 24, 25, and 30, could be found.

Set temp. point.

From the temp. point for secs. 19, 24, 25, and 30.

North on same line, bet. secs. 19 and 24.

40.00 No evidence of the sec. cor. of secs. 19 and 24, could be found.

Continue on same line with continuous measurement.

80.60 Fall 223 lks. E. of the cor. of secs. 13, 18, 19, and 24, hereinafter described.

The course of line bet. cor. secs. 15 and 30, and above sec. cor., therefore, is N. 0°51' W., and the proportionate distance for each half mile is 40.20 chs.

From the cor. of secs. 13, 18, 19, and 24.

North, bet. secs. 13 and 18.

40.08 Fall 67 lks. E. of the sec. cor. of secs. 13 and 18, hereinafter described.

The course of this half mile therefore is N. 0°58' W., and the distance is 40.09 chs.

Continue on same line with continuous measurement.

80.12 Fall 109 lks. E. of cor. of secs. 7, 12, 13, and 18, hereinafter described.

The course of this half mile therefore is N. 0°36' W., and the distance is 40.04 chs.

DEPENDENT RESURVEY OF THE SECOND GUIDE MERIDIAN WEST,
THROUGH T. 18 S., BET. RS. 11 AND 12 W.

Chains		miamD
	From the cor. of secs. 7, 12, 13, and 18.	
	North, bet. secs. 7 and 12.	80.00
40.27	Fall 43 lks. E. of the $\frac{1}{4}$ sec. cor. of secs. 7 and 12, hereinafter described.	
	The course of this half mile, therefore, is N. $0^{\circ}37'$ W., and the distance is 40.27 chs.	
	Continue on same line with continuous measurement.	
80.50	Fall 103 lks. E. of the cor. of secs. 1, 6, 7, and 12, hereinafter described.	
	The course of this half mile, therefore, is N. $0^{\circ}52'$ W., and the distance is 40.23 chs.	
	From the cor. of secs. 1, 6, 7, and 12.	
	North, bet. secs. 1 and 6.	
40.01	Fall 76 lks. E. of the $\frac{1}{4}$ sec. cor. of secs. 1 and 6, hereinafter described.	
	The course of this half mile therefore is N. $1^{\circ}05'$ W., and the distance is 40.02 chs.	
	Continue on same line with continuous measurement.	
82.53	Fall 92 lks. E. of the cor. of Tps. 17 and 18 S., Rs. 11 and 12 W., hereinafter described.	
	The course of this half mile, therefore, is N. $0^{\circ}14'$ W., and the distance is 42.52 chs.	

TRUE LINES.

From the cor. of Tps. 18 and 19 S., Rs. 11 and 12 W., heretofore described.

N. $0^{\circ}37'$ W, bet. secs. 31 and 36.

Over rolling land, along W. slope of hills, through medium dense undergrowth; ascend a gentle S. slope.

27.90 Low spur, projects W.; descend a gentle N. slope.

40.06 In a small draw, draining W., 20 ft. below spur.

The original $\frac{1}{4}$ sec. cor. of secs. 31 and 36, which is a limestone, $14 \times 10 \times 4$ ins., firmly set in the ground, and in a small mound of stone, mkd. $\frac{1}{4}$ on W. face.

At point for cor.

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, with the original cor. monument deposited alongside, for $\frac{1}{4}$ sec. cor. of sec. 36 only, with brass cap mkd.

$\frac{1}{4}$

S36

1934

raise a

DEPENDENT RESURVEY OF THE SECOND GUIDE MERIDIAN WEST,
THROUGH T. 18 S., BET. RS. 11 and 12 W.

Chains

mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Thence

N. 0°01' W., with continuous measurement.

Ascend a gentle S. slope.

46.38 Southing of 40.00 chs. from the closing cor. of secs. 30 and 31, hereinafter described.

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for the $\frac{1}{2}$ sec. cor. of sec. 31 only, with brass cap mkd.

|
331
1934

raise a

mound of stone, 3 ft. base, 2 ft. high, E. of cor.

55.10 Low spur, 20 ft. above wash, projects W.; descend a gentle N. slope.

65.00 Wash, 10 lks. wide, 1 ft. deep, 30 ft. below spur, drains W.; ascend a gentle S. slope.

79.95 Proportionate point 40 ft. above wash.

Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, for the cor. of secs. 25 and 30 only, with brass cap mkd.

T183 | T183
R117
321 | 331
335 |
R127

1934

raise a

mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Land, low hills, with a general westerly exposure and drainage.

Soil, gravel and clay loam, 3rd rate.

No timber.

Undergrowth, medium dense shadscale and greasewood.

Fair growth of browse for grazing.

N. 0°01' W., along the E. bdy. sec. 25.

Over low rolling hills, through medium dense undergrowth; ascend a gentle S. slope.

6.43 Point for closing cor. of secs. 30 and 31, hereinafter described.

DEPENDENT RESURVEY OF THE SECOND QUINCE MERIDIAN WEST,
THROUGH T. 18 S., BET. R. 25, 11 AND 12 W.

Chains

- 15.30 Spur, 10 ft. above sec cor., projects W.; descend a gentle N. slope.
- 23.80 Wash, 30 lks. wide, 6 ft. deep, 30 ft., below spur, drains W.; ascend a gentle S. slope.
- 36.20 Spur, 20 ft. above wash, projects W.; descend a gentle N. slope.
- 39.89 On gentle N. slope.

The original $\frac{1}{4}$ sec. cor. of secs. 25 and 30, which is a conglomerate stone, 14x5x6 ins., lying loose on the ground, mkd. $\frac{1}{4}$ on one face, unwitnessed.

At point for cor.

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, with the original cor. monument deposited alongside, for $\frac{1}{4}$ sec. cor. of sec. 25 only, with brass cap mkd.

$\frac{1}{4}$
 S25
 1934

raise a

mound of stone, 2 ft. base, 2 ft. high, W. of cor.

Thence N. 0°51' W., with continuous measurement.

- 46.445 At midpoint bet. the closing cors. of secs. 19 and 30, and secs. 30 and 31, hereinafter described.

On a gentle S. slope.

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ sec. cor. of sec. 30 only, with brass cap mkd.

$\frac{1}{4}$
 S30
 1934

raise a

mound of stone, 2 ft. base, 2 ft. high, E. of cor.

- 51.20 Wash, 20 lks. wide, 3 ft. deep, 30 ft. below spur, drains W.; ascend a gentle S. slope.

- 64.80 Spur, 30 ft. above wash, projects W.; descend a gentle N. slope.

- 80.09 Proportionate point on a gentle N. slope.

Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, for the cor. of secs. 24 and 25 only, with brass cap mkd.

T18S | T18S ✓
 | R11W
S24
S30
 S25 |
 R12W |

1934

raise a

ground of stone, 3 ft. base, 2 ft. high, W. of cor.
 Land, low rolling hills, with a general westerly exposure
 and drainage.
 Soil, clay loam, 3rd rate.
 No timber.
 Undergrowth, medium dense shadscale and greasewood.
 Fair growth of browse for grazing.


N. 0°51' W., along the E. bdy. of sec. 24.

Over gently rolling land, through medium dense under-
 growth; descend a gentle N. slope.

- 6.37 Point for closing cor. of secs. 19 and 30, hereinafter described.
- 23.70 Wash at base of descent drains N.60°W. from S.60°E.
- 40.20 On nearly level land, 40 ft. below sec. cor.

Proportionate point:

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in
 the ground, for the $\frac{1}{4}$ sec. cor. of sec. 24 only, with
 brass cap mkd




raise a mound of stone, 4 ft. base, 3 ft. high, W. of cor.

Continue

On same line, with continuous measurement.

- 46.365 At midpoint bet. the closing cors. of secs. 18 and 19,
 and secs. 19 and 30, hereinafter described.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in
 the ground, for $\frac{1}{4}$ sec. cor. of sec. 19 only, with brass
 cap mkd.



raise a mound of stone, 4 ft. base, 3 ft. high, E. of cor.

- 65.80 Leave shadscale and greasewood, and enter clay flat,
 bears E. and W.

- 71.80 Water holes, approximately 1.00 ch. wide, 3.00 chs. long.

- 80.40 On clay flat.

DEPENDENT RESURVEY OF THE SECOND QUINCE MERIDIAN WEST,
THROUGH T. 18 S., BET. RB. 11 AND 12 W.

Chains

The original cor. of secs. 13, 18, 19, and 24, which is a limestone, 8x8x8 ins., firmly set in the ground, mkd. 3 notches on N. and S. edges; unwitnessed.

At point for cor.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, with the original cor. monument deposited alongside, for the cor. of secs. 13 and 24 only, with brass cap mkd.

T18S	T18S
S13	R11W
S24	S19
R12W	
	1934

raise a

mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Land, gently rolling on S. 66.00 chs., and level on N. 14.00 chs., with a general westerly exposure and drainage.

Soil, heavy clay, 3rd rate.

No timber.

Undergrowth, medium dense shadscale and greasewood on the S. 66.00 chs., no vegetation on the N. 14.00 chs.

Fair growth of browse for grazing.

N.0°58'W., along the E. bdy. of sec. 13.

Over clay flat.

- 5.96 Point for closing cor. of secs. 18 and 19, hereinafter described.
- 18.30 Leave clay flat, bears E. and W.; enter undergrowth.
- 34.10 Enter clay flat, bears E. and W.; leave undergrowth.
- 40.09 On clay flat.

The original $\frac{1}{4}$ sec. cor. of secs. 13 and 18, which is a hewed pine post, 4 ins. square, 10 ins. above ground, evidence of scribe marks on W. face; unwitnessed.

At point for cor.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with the original cor. monument deposited alongside, for $\frac{1}{4}$ sec. cor. of sec. 13 only, with brass cap mkd

$\frac{1}{4}$	
S13	
	1934

raise a

mound of stone, 2 ft. base, 2 ft. high, W. of cor.

Thence

DEPENDENT RESURVEY OF THE SECOND GUIDE MERIDIAN WEST,
THROUGH T. 18 S., RRT. RS. 11 and 12 W.


Chains

N. 0°36' W., with continuous measurement.

45.965

At midpoint bet. the closing cors. of secs. 7 and 18, and secs. 18 and 19, hereinafter described.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor. of sec. 18 only, with brass cap mkd.



raise a

mound of stone, 2 ft. base, 2 ft. high, E. of cor.

52.30

Leave clay flat, bears E. and W.; enter undergrowth.

58.30

Top of rise, 20 ft. above sec. cor., bears E. and W.

69.60

Enter clay flat, leave undergrowth, bears E. and W.


80.13

On clay flat, 20 ft. below rise.

The original cor. of secs. 7, 12, 13, and 18, which is a sandstone, 8x8x4 ins., lying loose on the ground, mkd. 4 notches on one edge, and 2 notches on the opposite edge; unwitnessed.

At point for cor.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, with the original cor. monument deposited alongside, for cor. of secs. 12 and 13 only, with brass cap mkd.



1934

raise a

mound of stone, 2 ft. base, 2 ft. high, W. of cor.

Land, very gently rolling, with a general westerly exposure and drainage.

Soil, heavy clay, 3rd rate.

No timber.

Undergrowth, scattered shadscale and greasewood.

Fair growth of browse for grazing.

N. 0°37' W., along the E. bdy. of sec. 12.

Over clay flat, through very scattered undergrowth.

DEPENDENT RESURVEY OF THE SECOND GUIDE MERIDIAN WEST,
THROUGH T. 18 S., BET. RS. 11 and 12 W.

Chains

5.84 Point for closing cor. of secs. 7 and 12, hereinafter described.

39.00 Leave clay flat, bears E. and W.

40.27 On nearly level land.

The original $\frac{1}{4}$ sec. cor. of secs. 7 and 12, which is a sandstone, 9x8x5 ins., firmly set in the ground, mkd. $\frac{1}{4}$ on W. face; unwitnessed.

At point for cor.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with the original cor. monument deposited alongside, for $\frac{1}{4}$ sec. cor. of sec. 12 only, with brass cap mkd.

$\frac{1}{4}$
 S12
 1934

raise a

mound of stone, 2 ft. base, 2 ft. high, W. of cor.

Thence

N. 0°52' W., with continuous measurement.

45.825 At midpoint bet. the closing cors. of secs. 6 and 7, and 7 and 18, hereinafter described.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor. of sec. 7 only, with brass cap mkd.

$\frac{1}{4}$
 S 7
 1934

raise a

mound of stone, 2 ft. base, 2 ft. high, E. of cor.

57.00 Top of low rise, 20 ft. above sec. cor., bears E. and W.

80.50 On nearly level land.

The original cor. of secs. 1, 6, 7, and 12, which is a limestone, 12x6x4 ins., firmly set in the ground, mkd. 5 notches on S. edge, and 1 notch on N. edge; unwitnessed.

At point for cor.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, with the original cor. monument deposited alongside, for cor. of secs. 1 and 12 only, with brass cap mkd.

T18S | T18S
 | R11W
 S 1 |
 -----| S 7
 S12 |
 R12W |
 1934

raise a

DEPENDENT RESURVEY OF THE SECOND QUARTER MERIDIAN WEST,
 THROUGH T. 18 S., BET. R. 11 AND 12 W.

Chains

ound of stone, 2½ ft. base, 3 ft. high, W. of cor.
 Land, nearly level, with a westerly exposure and drainage.
 Soil, heavy clay; 3rd rate.
 No timber.
 Undergrowth, very scattered shadscale and greasewood.
 Fair growth of browse for grazing.

N.1°05'W., along the E. bdy. of sec. 1.

Over nearly level land, through scattered undergrowth.

5.31 Point for closing cor. of secs. 6 and 7, hereinafter described.

16.52 Improved road, bet. Delta, Utah, and Ely, Nevada, bears N.76°E., and S.76°W.

23.90 Wash, 30 lks. wide, 2 ft. deep, drains S.70°E.

31.30 Top of rise, bears E. and W.

40.02 On nearly level land.

The original ¼ sec. cor. of secs. 1 and 6, which is a limestone, 8x6x3 ins., firmly set in the ground, marked ¼ on W. face; unwitnessed.

At point for cor.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with the original cor. monument deposited alongside, for ¼ sec. cor. of sec. 1 only, with brass cap marked

¼
 S1
 1934

raise a

mound of stone, 2 ft. base, 2 ft. high, W. of cor.

Thence

N.0°14'W., along the E. bdy. of sec. 1.

45.32 Northing of 40.00 chs. from the closing cor. of secs. 6 and 7.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for the ¼ sec. cor. of sec. 6 only, with brass cap marked

¼
 S6
 1934

raise a

DEPENDENT RESURVEY OF THE SECOND QUINCE MERIDIAN WEST,
THROUGH T. 18 S., R. 11 AND 12 W.

Chains

- mound of stone, 2 ft. base, 2 ft. high, E. of cor.
- 56.10 Wash, 10 lks. wide, 1 ft. deep, drains N. 70° E.
- 62.44 Old road, bears N. 30° E. and S. 30° W.
- 63.50 Wash, 10 lks. wide, 1 ft. deep, drains E.
- 82.54 On nearly level land.

The original cor. of Tps. 17 and 18 S., Rs. 11 and 12 W. which is a juniper post, 3 ft. long, 2 ins. wide, and $\frac{1}{2}$ in. thick, lying loose on the ground, marked 6 notches on one face, and very dim scribe marks on the other three faces; unwitnessed.

At point for cor.

Set an iron post, 3 ft. long, 3 ins. diam., 30 ins. in the ground, with the original cor. monument deposited alongside, and with a limestone, 6x6x2 ins., marked X, deposited at the base, for cor. of Tps. 17 and 18 S., R. 12 W.; with brass cap marked

T17S	T18S
R12W	R11W
S36	
<hr/>	
S1	S6
T18S	

1934

of stone, 2 ft. base, 2 ft. high, W. of cor. raise a mound

Land, nearly level, with a general easterly exposure and drainage.

Soil, heavy clay; 3rd rate.

No timber.

Undergrowth, scattered shadscale and greasewood.

Fair growth of browse for grazing.

INDEPENDENT RESURVEY OF THE NORTH BDY. T. 18 S., R. 11 W

Independent resurvey of the north boundary of township 18 south, range 11 west, S. L. Meridian, superseding the survey executed by Joseph Gorkinski, U.S. Deputy Surveyor, in 1880.

Knowing from previous retracements that a line connecting the cor. of Tps. 17 and 18 S., Rs. 10 and 11 W., and the cor. of Tps. 17 and 18 S., Rs. 11 and 12 W., will deviate more than 14' of arc from the true cardinal course, I begin at the cor. of Tps. 17 and 18 S., Rs. 10 and 11 W., heretofore described.

Thence

West, along the S. bdy. of sec. 36 on a transit line describing the tangent.

Over gently rolling land, through medium dense undergrowth; ascend a gentle SE. slope.

U. S. G. S. INDEPENDENT RESURVEY OF THE NORTH BDY. T. 18 S., R. 11 W.

Chains

35.00 Top of ascent, 40 ft. above Tp. cor., slopes S. 20°E.; thence along a gently rolling SE. slope.

34.46 Easting of 40.00 chs. from the closing cor. of secs. 1 and 2, hereinafter described.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor. of sec. 1 only, with brass cap marked

$\frac{1}{4}$ S 1
1934

raise a mound of stone, 2 ft. base, 2 ft. high, S. of cor.

40.00 On a gentle S. slope.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor. of sec. 36 only, with brass cap marked

$\frac{1}{4}$ S 36
1933

raise a mound of stone, 4 ft. base, 4 ft. high, N. of cor.

From the above $\frac{1}{4}$ sec. cor., S.20°53'W., 56 lks. dist., is the original $\frac{1}{4}$ sec. cor. of secs. 1 and 36, which is a limestone, 10x7x6 ins., firmly set in the ground, mkd. $\frac{1}{4}$ on N. face. I destroy all evidence of this corner.

45.70 Improved road, bet. Delta, Utah, and Ely, Nevada, bears N.55°E., and S.55°W.

74.46 North 1 lk. from the tangent is the point for closing corner of secs. 1 and 2, hereinafter described.

80.00 On gentle SE. slope.

North 1 lk. from the tangent.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for corner of secs. 35 and 36 only, with brass cap marked

T17S | R11W
S35 | S36
S2
T18S
1933

raise a mound of stone, 4 ft. base, 3 ft. high, N. of cor.

From this sec. cor., S.31°30'W., 1.17 chs. dist. is the original corner of secs: 1, 2, 35, and 36, which is a limestone, 10x8x6 ins., firmly set in the ground, marked 5 notches on W. edge, and 1 notch on E. edge, witnessed by a small mound of stone N. I destroy all evidence of this corner.

Land, gently rolling, with a southerly exposure and drainage.

Soil, sandy and clay loam, with scattered rocks on the surface; 3rd rate.

No timber.

Chains

adlen5

Undergrowth medium dense shade and greasewood.
Fair growth of browse for grazing.

West, along the S. bdy. of sec. 35, on a transit line describing the tangent, which starts at a point 1 lk. S. of the cor. of secs. 35 and 36, and bears S.89°59'W.

34.59 Midpoint bet. the closing cors. of secs. 1 and 2, and 2 and 3, hereinafter described.

On a gradual S. slope.

North 2 lks. from the tangent.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor. of sec. 2 only, with brass cap marked

$\frac{1}{4}$ S 2
1934

raise a mound

of stone, 3 ft. base, 2 ft. high, S. of cor.

40.00 On gradual S. slope.

North 2 lks. from the tangent.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for the $\frac{1}{4}$ sec. cor. of sec. 35 only, with brass cap marked

$\frac{1}{4}$ S 35
1935

raise a mound

of stone, 2 ft. base, 2 ft. high, N. of cor.

From this $\frac{1}{4}$ sec. cor. S.34°30'W., 1.94 chs. dist., is the original $\frac{1}{4}$ sec. cor. of secs. 2 and 35, which is a limestone, 10x6x2 ins., lying on the ground, marked $\frac{1}{4}$ on one face. I destroy all evidence of this corner.

49.40 Old road, bears N.80°W., and S.80°E.

74.72 North 3 lks. from the tangent is the point for closing cor. of secs. 2 and 3, hereinafter described.

80.00 On nearly level land.

North 3 lks. from the tangent.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 34 and 35 only, with brass cap marked

T17S | R11W
S34 | S35

S3

T18S

1933

raise a mound

of stone, 3 ft. base, 2 ft. high, N. of cor.

Chains

Land, gently rolling, with a general southerly exposure and drainage.

Soil, sandy and clay loam, with scattered rocks on the surface; 3rd rate.

No timber.

Undergrowth, medium dense shadscale and greasewood.

Fair growth of browse for grazing.

From this sec. cor., S.50°49'W., 1.89 chs. distant is the original cor. of secs. 2, 3, 34, and 35, which is a limestone, 6x6x4 ins., lying on the ground, marked 4 notches on one edge, and 2 notches on the opposite edge. I destroy all evidence of this corner.

West, along the bdy. of sec. 34, on a transit line describing the tangent, which starts at a point 3 lks. S. of the cor. of secs. 34 and 35, and bears S.89°58'W.

Over gently rolling land, through medium dense undergrowth.

31.10 Wash, 20 lks. wide, 2 ft. deep, drains S.30°E.

34.83 Midpoint bet. the closing cors. of secs. 2 and 3, and 3 and 4, hereinafter described.

North 5 lks. from the tangent.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor. of sec. 3 only, with brass cap marked

$\frac{1}{4}$ S 3
1934

of stone, 3 ft. base, 2 $\frac{1}{2}$ ft. high, S. of cor. raise a mound

40.00 North 5 lks. from the tangent.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for the $\frac{1}{4}$ cor. of sec. 34 only, with brass cap marked

$\frac{1}{4}$ S 34

1933

of stone, 3 ft. base, 2 ft. high, N. of cor. raise a mound

From this $\frac{1}{4}$ sec cor, S.33°W., 3,40 chs. distant is the original $\frac{1}{4}$ sec. cor. of secs. 3 and 34, which is a limestone, 12x7x3 ins., lying on the ground marked $\frac{1}{4}$ on one face. I destroy all evidence of this corner.

40.10 Old road, bears S.85°W., and N.85°E.

74.94 North 7 lks. from the tangent is the point for the closing cor. of secs. 3 and 4, hereinafter described.

80.00 North 7 lks. from the tangent.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in

Chains

the ground, for the cor. of secs. 33 and 34 only, with brass cap marked

T17S	R11W
S33	S34

S4

T18S

1933

raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.

From this sec. cor. S.23°33'W., 3.15 chs. distant is the original cor. of secs. 3, 4, 33, and 34, which is a limestone, 9x6x4 ins., firmly set in the ground, marked 3 notches on E. and W. edges. I destroy all evidence of this corner.

~~Land, gently rolling, with a southeasterly exposure and drainage.~~

Soil, sandy and clay loam, with scattered rocks on the surface; 3rd rate.

No timber.

Undergrowth, medium dense shadscale and greasewood.

Fair growth of browse for grazing.

West, along the S. bdy. of sec. 33, on a transit line describing the tangent, which starts at a point 7 lks. S. of the cor. of secs. 33 and 34, and bears S.89°57'W.

Over gently rolling land, through medium dense undergrowth

20.00 Base of ascent, bears N. and S.; ascend a gentle E. slope

34.90 On a gentle E. slope.

Midpoint bet. the closing cors. of secs. 3 and 4, and 4 and 5, hereinafter described.

North 10 lks. from the tangent.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for the $\frac{1}{4}$ sec. cor. of sec. 4 only, with brass cap marked

$\frac{1}{4}$ S 4

1934

of stone, 2 ft. base, 2 ft. high, S. of cor. raise a mound

40.00 On a gentle E. slope, 30 ft. above sec. cor.

North 10 lks. from the tangent.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor. of sec. 33 only, with brass cap marked

$\frac{1}{4}$ S 33

1934

INDEPENDENT RESURVEY OF THE NORTH BDY. T. 18 S., R. 11 W.

Chains

raise a mound of stone, 2 ft. base, 2 ft. high, N. of cor.

From this $\frac{1}{4}$ sec. cor., S.23°49'W., 3.62 chs. distant is the original $\frac{1}{4}$ sec. cor. of secs. 4 and 33, which is a limestone, 10x8x5 ins., firmly set in the ground, marked $\frac{1}{4}$ on N. face. I destroy all evidence of this corner.

60.00 Ascend a gentle rolling S. slope.

74.86 On top of rise, 60 ft. above $\frac{1}{4}$ sec. cor., slopes S.

North 13 lks. from the tangent is the point for the closing cor. of secs. 4 and 5, hereinafter described.

80.00 On rise.

North 13 lks. from the tangent.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for the cor. of secs. 32 and 33 only, with brass cap marked

T17S	R11W
S32	S33

S5

T18S

1934

raise a mound of stone, 4 ft. base, 3 ft. high, N. of cor.

From this sec. cor., S.18°30'W., 4.00 chs. distant is the original cor. of secs. 4, 5, 32, and 33, which is a granite stone, 11x8x6 ins., lying on the ground, marked 4 notches on one edge, and 2 notches on the opposite edge. I destroy all evidence of this corner.

Land, gently rolling, with a general southeasterly exposure and drainage.

Soil, sandy and clay loam, with scattered rocks on the surface; 3rd rate.

No timber.

Undergrowth, medium dense shadscale and greasewood.

Fair growth of browse for grazing.

West, along the S. bdy. of sec. 32, on a transit line describing the tangent, which starts at a point 13 lks. S. of the cor. of secs. 32 and 33, and bears S.89°57'W.

Over gently rolling land, through medium dense undergrowth; descend a gradual SW. slope.

35.02 On a gradual SW. slope, at midpoint bet. the closing corners of secs. 4 and 5, and 5 and 6, hereinafter described.

North 17 lks. from the tangent.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for the $\frac{1}{4}$ sec. cor. of sec. 5 only, with brass cap marked

$\frac{1}{4}$ S 5
1934

Chains

raise a mound

of stone, 3 ft. base, 2 ft. high, S. of cor.

40.00 On a gradual SW. slope, 50 ft. below sec. cor.

North 17 lks. from the tangent.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for the $\frac{1}{4}$ sec. cor. of sec. 32 only, with brass cap marked

$\frac{1}{4}$ S 32

1933

raise a mound

of stone, 3 ft. base, 2 ft. high, N. of cor.

From this $\frac{1}{4}$ sec. cor., S.18°25'W., 4.59 chs. distant is the original $\frac{1}{4}$ sec cor. of secs. 5 and 32, which is a flint rock, 6x5x4 ins., firmly set in the ground, marked $\frac{1}{4}$ on N. face. I destroy all evidence of this corner.

75.18 North 20 lks. from the tangent is the point for the closing corner of secs. 5 and 6, hereinafter described.

79.50 Road, bet. Delta, Utah, and Swasey Spring, bears N.35°W. and S.35°E.

80.00 On gently rolling land, 20 ft. below $\frac{1}{4}$ sec. cor.

North 20 lks. from the tangent.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for the cor. of secs. 31 and 32 only, with brass cap marked

T17S	R11W
------	------

S31	S32
-----	-----

S6.

T18S

1933

raise a mound

of stone, 3 ft. base, 2 ft. high, N. of cor.

From this sec. corner, S.13°58'W., 5.02 chs. dist., is the original corner of secs. 5, 6, 31, and 32, which is a granite stone, 8x7x4 ins., firmly set in the ground, marked 5 notches on E. edge, and 1 notch on W. edge. I destroy all evidence of this corner.

Land, gently rolling, with a southeasterly exposure and drainage.

Soil, sandy and clay loam, with scattered rocks on the surface; 3rd rate.

No timber.

Undergrowth, medium dense shadscale and greasewood.

Fair growth of browse for grazing.

Chains

West, along the S. bdy. of sec. 31, on a transit line, describing the tangent, which starts at a point 20 lks. S. of the cor. of secs. 31 and 32, and bears S.89°56'W.

Over gently rolling land, through medium dense undergrowth.

1.30 Soap Wash, 60 lks. wide, 4 ft. deep, drains S.15°E.

35.18 Westing of 40.00 chs. from the closing cor. of secs. 5, and 6, hereinafter described.

North 25 lks. from the tangent.

Set an iron post, 3 ft. long, 1 in. diam., 16 ins. in the ground, to solid rock, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor. of sec. 6 only, with brass cap marked

$\frac{1}{4}$ S 6
1934

raise a small mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, S. of cor.

40.00 On gently rolling land.

North 25 lks. from the tangent.

Set an iron post, 3 ft. long, 1 in. diam., 22 ins. in the ground, and in a mound of stone, 18 ins. base, to top, for $\frac{1}{4}$ sec. cor. of sec. 31 only, with brass cap marked

$\frac{1}{4}$ S 31
1933

raise a small mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

Note: No trace of the original $\frac{1}{4}$ sec. corner could be found.

67.50 Old road, bears N.15°E., and S.15°W.

80.43 The parallel intersects a N. and S. line on the E. bdy. of Tp. 17 S., R. 12 W., which is also the Second Guide Meridian West, 5.47 chs. N. of the cor. of Tps. 17 and 18 S., R. 12 W., heretofore described.

On nearly level land at point of intersection.

Set an iron post, 3 ft. long, 3 ins. diam., 30 ins. in the ground, for closing cor. of Tps. 17 and 18 S., R. 11 W., with brass cap marked

T17S	T17S
R12W	R11W
	S31
	CC
S36	
	S 6
	T18S
	1934

raise a mound of stone, 4 ft. base, 2 ft. high, E. of cor.

Chains

CHAINS

Land, gently rolling, with a general southeasterly exposure and drainage.

Soil, gravel, and clay loam; 3rd rate.

No timber.

Undergrowth, medium dense shadscale and greasewood.

Fair growth of browse for grazing.

SUBDIVISION OF T. 18 S., R. 11 W.

From the cor. of secs. 25, 30, 31, and 36, on the E. bdy. of Tp., heretofore described.

West, on a random line bet. secs. 25 and 36.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.00 Set temp. cor. of secs. 25, 26, 35, and 36.

From the temp. cor. of secs. 25, 26, 35, and 36.

South, on a random line bet. secs. 35 and 36.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

81.26 Intersect the S. bdy. of Tp. 52 lks. W. of the cor. of secs. 1, 2, 35, and 36, heretofore described.

Thence from the cor. of secs. 1, 2, 35, and 36.

North, on sectional guide meridian, bet. secs. 35 and 36.

Over gently rolling land, through medium dense undergrowth.

1.20 Old road, bears N.77°W., and S.77°E.

31.00 Wash, 30 lks. wide, 3 ft. deep, drains S.60°E.

40.14 Fall 45 lks. E. of a limestone, 10x10x2 ins. above the ground, firmly set, and marked $\frac{1}{4}$ on W. face. I destroy all evidence of this stone.

41.26 On gently rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with broken glass deposited around post for $\frac{1}{4}$ sec. corner with brass cap marked

S35 | S36

1934

of stone, 3 ft. base, 2 ft. high, W. of cor. raise a mound

56.00 Wash, 20 lks. wide, 2 ft. deep, drains S.75°E.

81.26 On gently rolling land.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in

the ground, with broken glass deposited around corner for corner of secs. 25, 26, 35, and 36, with brass cap marked

T18S R11W

S26 S25

S35 S36

1934

raise a mound

of stone, 4 ft. base, 3 ft. high, W. of cor.

Land, gently rolling, with a general easterly exposure and drainage.

Soil, gravelly and clay loam; 3rd rate.

No timber.

Undergrowth, medium dense shadscale and greasewood.

Fair growth of browse for grazing.

From the above sec. corner, S. 42° 07' W., 1.29 chs. distant, is a limestone, 20x12x5 ins., firmly set in the ground, marked 1 notch on S. edge. I destroy this stone.

From the corner of secs. 25, 30, 31, and 36, on E. bdy. of Tp.

West, on sectional correction line, bet. secs. 25 and 36.

Over gently rolling land, through medium dense undergrowth.

39.48 On gently rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$ S 25

S 36

1934

raise a mound

of stone, 3 ft. base, 2 ft. high, N. of cor.

40.00 Base of ascent, bears NW. and SE.; ascend a gradual NE. slope.

46.60 Top of rise, bears NW. and SE.

79.48 The cor. of secs. 25, 26, 35, and 36, 20 ft. above $\frac{1}{4}$ sec. cor.

Land, gently rolling, with a general easterly exposure and drainage.

Chains


Soil, gravelly and clay loam; 3rd rate.
 No timber.
 Undergrowth, medium dense shadscale and greasewood.
 Fair growth of browse for grazing.

North, on sectional guide meridian, bet. secs. 25 and 26
 Over gently rolling land, through medium dense under-
 growth.

11.60 Wash, 40 lks. wide, 2 ft. deep, drains NE.

40.00 On gently rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in
 the ground, to solid rock, with a limestone, 4x3x2 ins.,
 marked X, deposited at base, and in a mound of stone to
 top, for $\frac{1}{4}$ sec. cor., with brass cap marked




raise a mound

of stone, 3 ft. base, 2 ft. high, W. of cor.

80.00 On gently rolling land.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in
 the ground, with broken glass deposited around post, for
 cor. of secs. 23, 24, 25, and 26, with brass cap marked



raise a mound

of stone, 2 ft. base, 2 ft. high, W. of cor.

Land, gently rolling, with a general easterly exposure
 and drainage.

Soil, sandy and clay loam; 3rd rate.

No timber.

Undergrowth, medium dense shadscale and greasewood.

Fair growth of browse for grazing.

East, on a random line bet. secs. 24 and 25.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

78.43 Intersect E. bdy. of Tp. at the cor. of secs. 24 and
 25, heretofore described.

SUBDIVISION OF T. 18 S., R. 11 W.

Chains

Thence

West, on true line bet. secs. 24 and 25.

Over gently rolling land, through medium dense undergrowth.

38.43 On gently rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$ S 24

S 25

1934

of stone, 3 ft. base, 2 ft. high, N. of cor. raise a mound,

From this $\frac{1}{4}$ sec. cor., N. 12 lks. distant is a sandstone, 8x4x2 ins., lying on the ground, marked $\frac{1}{4}$ on one face. I destroy this stone.

78.43 The cor. of secs. 23, 24, 25, and 26.

Land, gently rolling, with a general easterly exposure and drainage.

Soil, heavy clay; 3rd rate.

No timber.

Undergrowth, medium dense shadscale and greasewood.

Fair growth of browse for grazing.

North, on sectional guide meridian, bet. secs. 23 and 24.

Over gently rolling land, through medium dense undergrowth.

40.00 On gently rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked.

$\frac{1}{4}$
S23 | S24
1934

raise a mound

of stone, 3 ft. base, 2 ft. high, W. of cor.

80.00 On gently rolling land.

Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, for cor. of secs. 13, 14, 23, and 24, with brass cap marked

T18S | R11W
S14 | S13
S23 | S24
1934

raise a mound

SUBDIVISION OF T. 18 S., R. 11 W.

Chains

of stone, 3 ft. base, 2 ft. high, W. of cor.
 Land, gently rolling, with a general easterly exposure and drainage.
 Soil, heavy clay; 3rd rate.
 No timber.
 Undergrowth, medium dense shadscale and greasewood.
 Fair growth of browse for grazing.

East, on a random line bet. secs. 13 and 24.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

77.49 Intersect E. bdy. of Tp. at the cor. of secs. 13 and 24, heretofore described.

Thence

West, on true line, bet. secs. 13 and 24.

Over gently rolling land, through medium dense undergrowth.

19.40 Soap Wash, 50 lks. wide, 5 ft. deep, drains SE.

37.49 On gently rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$ S 13

S 24

1934

raise a mound

of stone, 3 ft. base, 2 ft. high, N. of cor.

77.49 The cor. of secs. 13, 14, 23, and 24.

Land, gently rolling, with a general SE. exposure and drainage.

Soil, heavy clay; 3rd rate.

No timber.

Undergrowth, medium dense shadscale and greasewood.

Fair growth of browse for grazing.

North, on sectional guide meridian, bet. secs. 13 and 14.

Over gently rolling land, through medium dense undergrowth.

40.00 On gently rolling land.

SUBDIVISION OF T. 18 S., R. 11 W.

Chains

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$
 S14 | S13
 1934

of stone, 3 ft. base, 2 ft. high, W. of cor. raise a mound

55.00 Soap Wash, 50 lks. wide, 5 ft. deep, drains SE.

80.00 On gently rolling land.

Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, for cor. of secs. 11, 12, 13, and 14, with brass cap marked

T18S | R11W
 S11 | S12
 S14 | S13
 1934

of stone, 3 ft. base, 2 ft. high, W. of cor. raise a mound

Land, gently rolling, with a general easterly exposure and drainage.

Soil, heavy clay; 3rd rate.

No timber.

Undergrowth, medium dense shadscale and greasewood.

Fair growth of browse for grazing.

East, on a random line bet. secs. 12 and 13.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

76.52 Intersect E. bdy. of Tp. 4 lks. S. of the cor. of secs. 12 and 13 only, heretofore described.

Thence

S.89°58'W., on true line bet. secs. 12 and 13.

Over gently rolling land, through medium dense undergrowth.

36.52 On gently rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked

S 12
 —————
 S 13

of stone, 3 ft. base, 2 ft. high, N. of cor. raise a mound

39.92 A limestone, 10x4x3 ins., marked $\frac{1}{4}$ on one face, bears N. 50 lks. dist. I destroy this stone.

76.52 The cor. of secs. 11, 12, 13, and 14.

Land, gently rolling, with a general SE. exposure and drainage.

SUBDIVISION OF T. 18 S., R. 11 W.

Chains

ext. 110

Soil, heavy clay; 3rd rate.

No timber.

Undergrowth, medium dense shadscale and greasewood.

Fair growth of browse for grazing.

North, on section guide meridian, bet. secs. 11 and 12.

Over gently rolling land, through medium dense undergrowth.

40.00 On gently rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked

$$\begin{array}{c} \frac{1}{4} \\ \uparrow \\ \text{S11} | \text{S12} \\ \hline 1934 \end{array}$$

of stone, 3 ft. base, 2 ft. high, W. of cor. raise a mound

75.00 Wash, 100 lks. wide, drains E.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, for cor. of secs. 1, 2, 11, and 12^m with brass cap marked.

$$\begin{array}{c} \text{T18S} | \text{R11W} \\ \hline \text{S2} | \text{S1} \\ \hline \text{S11} | \text{S12} \\ \hline 1934 \end{array}$$

of stone, 3 ft. base, 2 ft. high, W. of cor. raise a mound

Land, gently rolling, with a general southeasterly exposure and drainage.

Soil, heavy clay; 3rd rate.

No timber.

Undergrowth, medium dense shadscale and greasewood.

Fair growth of browse for grazing.

N. 89° 58' E., on a random line, bet. secs. 1 and 12.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

75.52 Intersect E. bdy. of Tp. 4 lks. N. of the cor. of secs. 1 and 12, heretofore described.

Thence

West, on true line bet. secs. 1 and 12.


Over gently rolling land, through medium dense undergrowth.

SUBDIVISION OF T. 18 S., R. 11 W.

Chains

65.52 On gently rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked



of stone, 3 ft. base, 2 ft. high, N. of cor. raise a mound

75.52 The cor. of secs. 1, 2, 11, and 12.

Land, gently rolling, with a general southeasterly exposure and drainage.

Soil, heavy clay; 3rd rate.

No timber.

Undergrowth, medium dense shadscale and greasewood.


Fair growth of browse for grazing.

North, on sectional guide meridian, between sections 1 and 2.

Over gently rolling land, through medium dense undergrowth.

40.00 On gently rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked



of stone, 2 ft. base, 18 ins. high, W. of cor. raise a mound


70.00 State Highway, bet. Delta, Utah, and Ely, Nevada, bears E. and W.

71.20 Old road, bears S.75°E., and N.75°W., 1.00 ch. distant to State Highway.

82.62 Intersect N. bdy. of Tp. 5.54 chs. distant, E. of the cor. of secs. 35 and 36, heretofore described.

On gentle SE. slope.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for closing cor. of secs. 1 and 2, with brass cap marked




SUBDIVISION OF T. 18 S., R. 11 W.

Chains	
	marked
	raise a mound of
	stone, 2 ft. base, 18 ins. high, S. of corner.
	Land, gently rolling, with a general southeasterly exposure and drainage.
	Soil, volcanic ash and clay; 3rd rate.
	No timber.
	Undergrowth, medium dense shadscale and greasewood.
	Fair growth of browse for grazing.
	From the cor. of secs. 25, 26, 35, and 36.
	West, on a random line bet. secs. 26, and 35.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
80.00	Set temp. cor. of secs. 26, 27, 34, and 35.
	From the temp. cor. of secs. 26, 27, 34, and 35.
	S.0°01 E. on a random line bet. secs. 34 and 35.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
82.34	Intersect S. bdy. of Tp. 42 lks. E. of the corner of secs. 2, 3, 34, and 35, heretofore described.
	Thence
	From the cor. of secs. 2, 3, 34, and 35.
	N.0°01'W., on true line bet. secs. 34 and 35.
	Over rolling land, along a gentle E. slope, through medium dense undergrowth.
4.00	Wash, drains E.
21.50	Old road, bears N.20°W., and S.20°E.
29.80	Old road, bears N.60°W., and S.60°E.
31.85	Wash, drains E.
39.98	A limestone, 12x8x3 ins., firmly set in the ground, marked $\frac{1}{4}$ on W. face, bears W. of line 43 lks. distant. I destroy this stone.
42.34	On a gentle E. slope. Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with broken glass deposited around post.

Chains

exist

for $\frac{1}{4}$ sec. cor., with brass cap mkd.



raise a

mound of stone, 2 ft. base, 18 ins. high, W. of cor.


46.90 Wash, 50 lks. wide, drains E.

67.90 Wash, 100 lks. wide, drains E.

79.00 Old road, bears N. 30° W., and S. 30° E.

82.34 On a gentle E. slope.

Set an iron post, 3 ft. long, 2 ins. diam., 15 ins. in the ground, in a mound of stone to top for cor. of secs. 26, 27, 34, and 35, with brass cap mkd.



raise a

mound of stone, 3 ft. base, 3 ft. high, W. of cor.

Land, gently rolling, with a general easterly exposure and drainage.

Soil, gravelly, and clay loam, 3rd rate.

No timber.

Undergrowth, medium dense shadscale and greasewood.

Fair growth of browse for grazing.

From the above sec. cor., S. 26°02' W., 2.42 chs. dist., is a limestone, 15x8x3 ins., firmly set in the ground, mkd. 1 notch on S. edge, and 2 notches on E. edge. I destroy all evidence of this cor.

From the cor. of secs. 25, 26, 35, and 36.

West, on sectional correction line, bet. secs. 26 and 35.

Over rolling land, through medium dense undergrowth; ascend a gradual E. slope.


15.00 Wash, 50 lks. wide, 2 ft. deep, drains NE.

25.00 Low spur, projects NE.

28.60 Wash, 40 lks. wide, 3 ft. deep, drains N. 70° E.

40.21 On rolling land, 50 ft. above sec. cor.

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.



exist

Chains

raise a

mound of stone, 3 ft. base, 2 ft. high, N. of cor.

80.42 The cor. of secs. 26, 27, 34, and 35.

Land, rolling, with a general easterly exposure and drainage.

Soil, gravelly, and clay loam, 3rd rate.

No timber.

Undergrowth, medium dense shadscale and greasewood.

Fair growth of browse for grazing.

N. 0°01' W., bet. secs. 26 and 27.

Over rolling land, along a SE. slope, through medium dense undergrowth.

2.00 Wash, 20 lks. wide, drains E.

13.00 Wash, 15 lks. wide, drains E.

29.60 Wash, 20 lks. wide, drains S. 70° E.

36.40 Wash, 20 lks. wide, drains S. 80° E.

40.00 On rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

S27 | S26
 1934

raise a

mound of stone, 3 ft. base, 2 ft. high, W. of cor.

From the above $\frac{1}{4}$ sec. cor., S. 43°28' W., 2.60 chs. dist. is a limestone, 12x8x6 ins., firmly set in the ground, mkd. $\frac{1}{4}$ on W. face. I destroy all evidence of this stone.

53.70 Wash, drains E.

57.50 Wash, drains E.

59.70 Wash, drains E.

78.15 A limestone, 7x7x6 ins., firmly set in the ground, mkd. 2 notches on S. and E. edges, bears W. 2.55 chs. dist., I destroy all evidence of this stone.

80.00 On rolling land.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 22, 23, 26, and 27, with brass cap mkd.

T189 | R11W
 S22 | S23
 S27 | S26
 1934

raise a

Chains

mi. en. mound of stone, 4 ft. base, 3 ft. high, W. of cor.
 through . . . land, rolling, with a general easterly exposure and drainage.

Soil, gravelly, and clay loam, 3rd rate.

No timber.

Undergrowth, medium dense shadscale and greasewood.

Fair growth of browse for grazing.

East, on a random line bet. secs. 23 and 26.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.48 Intersect a N. and S. line, 5' lks. S. of the cor. of secs. 23, 24, 25, and 26.

Thence

S. 89°58' W., on true line bet. secs. 23 and 26.

Over gently rolling land, through medium dense undergrowth.

40.24 On gently rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

S 23
S 26
1934

raise a

mound of stone, 3 ft. base, 2 $\frac{1}{2}$ ft. high, N. of cor.

55.00 Ascend a gradual E. slope.

80.48 The cor. of secs. 22, 23, 26, and 27, 100 ft. above $\frac{1}{4}$ sec. cor.

Land, gently rolling, with a general southeasterly exposure and drainage.

Soil, sandy and clay loam, 3rd rate.

No timber.

Undergrowth, medium dense shadscale and greasewood.

Fair growth of browse for grazing.

N. 0°01' W., bet. secs. 22 and 23.

Over gently rolling land, along a gradual E. slope, through medium dense undergrowth.

28.50 Wash, drains E.

40.00 On a gradual E. slope.

Chains

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with a limestone, 6x4x3 ins., mkd. X, deposited at base, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

S22 | S23
1934

raise a

mound of stone, 3 ft. base, 2 ft. high, W. of cor.

52.20 Wash, drains N. 75° E.

78.55 A limestone, 15x10x4 ins., mkd. 3 notches on S. edge, and 2 notches on E. edge, firmly set in the ground, bears W. 2.53 chs. dist., I destroy all evidence of this stone

80.00 On a gradual E. slope.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, with broken glass deposited around post, for cor. of secs. 14, 15, 22, and 23, with brass cap mkd.

T18S | R11W
S15 | S14
S22 | S23
1934

raise a

mound of stone, 4 ft. base, 3 $\frac{1}{2}$ ft. high, W. of cor.

Land, gently rolling, with a general easterly exposure and drainage.

Soil, sandy and clay loam, 3rd rate.

No timber.

Undergrowth, medium dense shadscale.

Fair growth of browse for grazing.

N. 89°58' E., on a random line bet. secs. 14 and 23.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.48 Intersect N. and S. line, 2 lks. N. of the cor. of secs. 13, 14, 23, and 24.

Thence

S. 89°59' W., on true line bet. secs. 14 and 23.

Over gently rolling land, through medium undergrowth.

31.60 Wash, 10 lks. wide, 1 ft. deep, drains NE.

40.24 On gently rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

S 14
S 23
1934

raise a

SUBDIVISION OF T. 18 S., R. 11 W.

Chains

mound of stone, 2 ft. base, 18 ins. high, N. of cor.

44.00 Rim of a small shallow basin, bears NE. and SW.

80.48 The cor. of secs. 14, 15, 22, and 23, 20 ft. above 1/4 sec. cor..

Land, gently rolling, with a general northeasterly exposure and drainage.

Soil, volcanic ash, and clay loam, 3rd rate.

No timber.

Undergrowth, medium shadscale, match-brush and budsage.

Fair growth of browse for grazing.

N. 0°01' W., bet. secs. 14 and 15.

Over gently rolling land, through medium dense undergrowth.

11.20 Wash, 30 lks. wide, 4 ft. deep, drains NE.

29.90 Wash, 50 lks. wide, 4 ft. deep, drains NE.

40.00 On gently rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/4 sec. cor., with brass cap mkd.

S15|S14
1934

raise a

mound of stone, 2 ft. base, 18 ins. high, W. of cor.

45.90 Wash, 10 lks. wide, 2 ft. deep, drains NE.

54.00 Wash, 20 lks. wide, 2 ft. deep, drains SE.

58.80 Wash, 20 lks. wide, 2 ft. deep, drains NE.

80.00 On gently rolling land.

Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 10, 11, 14, and 15, with brass cap mkd.

T18S|R11W
S10|S11
S15|S14
1934

raise a

mound of stone, 2 ft. base, 18 ins. high, W. of cor.

Land, gently rolling, with a general northeasterly exposure and drainage.

Soil, volcanic ash and clay loam, with scattered rocks on the surface, 3rd rate.

No timber.

Undergrowth, medium shadscale, mountain rush, match-brush and sagebrush.

SUBDIVISION OF T. 18 S., R. 11 W.

Chains	antio			
	Fair growth of browse for grazing.			
	N. 89°59' E., on a random line bet. secs. 11 and 14.			
40.00	Set temp. $\frac{1}{4}$ sec. cor.			
80.44	Intersect N. and S. line, 5 lks. S. of the cor. of secs. 11, 12, 13, and 14.			
	Thence			
	S. 89°57' W., on true line bet. secs. 11 and 14.			
	Over gently rolling land, through medium undergrowth.			
39.70	Soap Wash, 70 lks. wide, 6 ft. deep, drains SE.			
40.22	On gently rolling land.			
	Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap mkd.			
	$\frac{1}{4}$ <table style="margin-left: auto; margin-right: auto;"> <tr><td>S 11</td></tr> <tr><td>S 14</td></tr> <tr><td>1934</td></tr> </table>	S 11	S 14	1934
S 11				
S 14				
1934				
	raise a			
	mound of stone, 2 ft. base, 18 ins. high, N. of cor.			
80.44	The cor. of secs. 10, 11, 14, and 15.			
	Land, gently rolling, with a general southeasterly exposure and drainage.			
	Soil, volcanic ash and clay loam, with scattered rocks on the surface, 3rd rate.			
	No timber.			
	Undergrowth, medium shadscale, match-brush and budsage.			
	Fair growth of browse for grazing.			
	N. 0°01' W., bet. secs. 10 and 11.			
	Over gently rolling land, through medium undergrowth.			
33.60	Soap Wash, 20 lks. wide, 5 ft. deep, drains SE.			
40.00	Set an iron post, 3 ft. long 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.			
	$\frac{1}{4}$ <table style="margin-left: auto; margin-right: auto;"> <tr><td>S10 S11</td></tr> <tr><td>1934</td></tr> </table>	S10 S11	1934	
S10 S11				
1934				
	raise a			
	mound of stone, 2 ft. base, 18 ins. high, W. of cor.			
80.00	On gently rolling land.			
	Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in			

Chains

the ground, for cor. of secs. 2, 3, 10 and 11, with brass cap mkd.

T18S R11W
 S3 S2
 S10 S11
 1934

raise a

mound of stone, 2 ft. base, 18 ins. high, W. of cor.

Land, gently rolling, with a general southeasterly exposure and drainage.

Soil, volcanic ash and clay loam, 3rd rate.

No timber.

Undergrowth, medium dense shadscale, budsage, mountain-rush and match-brush.

Fair growth of browse for grazing.

N. 89°57' E., on a random line, bet. secs. 2 and 11.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.38 Intersect N. and S. line, 7 lks. N. of the cor. of secs. 1, 2, 11, and 12.

Thence

West, on true line bet. secs. 2 and 11.

Over gently rolling land, through medium undergrowth.

15.10 Wash, drains S. 75° E.

40.19 On gently rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

S 2
 S 11
 1934

raise a

mound of stone, 2 ft. base, 18 ins. high, N. of cor.

80.38 The cor. of secs. 2, 3, 10, and 11.

Land, gently rolling, with a general easterly exposure and drainage.

Soil, volcanic ash and clay loam, 3rd rate.

No timber.

Undergrowth, medium dense shadscale, match-brush, budsage and mountain-rush.

Fair growth of browse for grazing.

Chains													
	N. 0°01' W., on true line bet. secs. 2 and 3. Over gently rolling land, through medium undergrowth.												
28.80	Wash, 15 lks. wide, 2 ft. deep, drains SE.												
40.00	On gently rolling land. Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.												
	$\frac{1}{4}$ <table style="margin: auto; border-collapse: collapse;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S3</td> <td style="padding: 0 5px;">S2</td> </tr> <tr> <td colspan="2" style="text-align: center;">1934</td> </tr> </table>	S3	S2	1934									
S3	S2												
1934													
	raise a												
62.90	mound of stone, 2 ft. base, 18 ins. high, W. of cor. State Highway between Delta, Utah, and Ely, Nevada, bears N. 75° E., and S. 75° W.												
82.63	Intersect N. bdy. of Tp., 5.28 chs. dist., E. of the cor. of secs. 34 and 35, heretofore described, On gently rolling land. Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for closing cor. of secs. 2 and 3, with brass cap mkd.												
	<table style="margin: auto; border-collapse: collapse;"> <tr> <td colspan="2" style="text-align: center;">T17S R11W</td> </tr> <tr> <td colspan="2" style="text-align: center;">S35</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S3</td> <td style="padding: 0 5px;">S2</td> </tr> <tr> <td colspan="2" style="text-align: center;">T18S R11W</td> </tr> <tr> <td colspan="2" style="text-align: center;">CC</td> </tr> <tr> <td colspan="2" style="text-align: center;">1934</td> </tr> </table>	T17S R11W		S35		S3	S2	T18S R11W		CC		1934	
T17S R11W													
S35													
S3	S2												
T18S R11W													
CC													
1934													
	raise a												
	mound of stone, 2 ft. base, 18 ins. high, S. of cor. Land, gently rolling, with a general southeasterly exposure and drainage. Soil, volcanic ash and clay, 3rd rate. No timber. Undergrowth, medium shadscale, budsage and mountain-rush. Fair growth of browse for grazing.												
	From the cor. of secs. 26, 27, 34, and 35. West, on a random line bet. secs. 27 and 34.												
40.00	Set temp. $\frac{1}{4}$ sec. cor.												
80.00	Set temp. cor. of secs. 27, 28, 33, and 34. From the temp. cor. of secs. 27, 28, 33, and 34.												
	S. 0°01' E., on a random line bet. secs. 33 and 34.												
40.00	Set temp. $\frac{1}{4}$ sec. cor.												
83.08	Intersect S. bdy. of Tp. 10 lks. E. of the cor. of												

SUBDIVISION OF T. 18 S., R. 11 W.

Chains

secs. 3, 4, 33, and 34, heretofore described.

Thence


From the cor. of secs. 3, 4, 33, and 34.

N.0°01'W., on true line bet. secs. 33 and 34.

Over rolling hills, through medium undergrowth; ascend a gradual SE. slope.

- 4.10 Spur, projects S.25°W.; also a road along spur, bears N.25°E., and S.25°W.; descend a gradual NW. slope.
- 8.45 Wash, drains SW.; ascend a gradual S. slope.
- 16.10 Ridge, 70 ft. above sec. cor.; also road along ridge, bears N.80°W., and S.80°E.; descend a gradual north slope.
- 16.90 Head of draw, drains N.80°E., approximately 5.00 dhs. dist., thence N.
- 36.00 Wash, 20 lks. wide, 3 ft. deep, drains N., thence along wash.
- 39.20 Leave wash, 120 ft. below ridge, drains N.60°E.; ascend a gradual S. slope.
- 43.08 On a gradual S. slope, 10 ft. above wash.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked




raise a mound

of stone, 4 ft. base, 3 ft. high, W. of cor.

- 59.20 Head of draw, drains S.50°E.
- 67.40 Spur, 130 ft. above $\frac{1}{4}$ sec. cor., projects SE.; descend a gradual N. slope..
- 78.30 Draw, 120 ft. below spur, drains E. from NW.; ascend a gentle S. slope.
- 83.08 On a gentle S. slope, 10 ft. above draw.

Set an iron post, 3 ft. long, 2 ins. diam., 20 ins. in the ground to solid rock, and in a mound of stone to top, for cor. of secs. 27, 28, 33, and 34, with brass cap marked



SUBDIVISION OF T. 18 S., R. 11 W.

Chains

aligned

raise a mound
of stone, 4 ft. base, 3 ft. high, W. of cor.

Land, rolling hills, with a general southerly exposure, and drainage, on the S. 16.00 chs., and easterly on the balance of the mile.

Soil, gravelly and clay loam; 3rd rate.

No timber.

Undergrowth, medium growth of shadscale and greasewood.

Fair growth of browse for grazing.

From the above sec. cor., S.18°30'W., 3.52 chs. dist., is a quartzite stone, 6x6x4 ins., firmly set in the ground, marked 3 notches on E. edge, and 1 notch on S. edge. I destroy all evidence of this stone.

From the cor. of secs. 26, 27, 34, and 35.

West, on sectional correction line, between secs. 27 and 34.

Over, low, rolling hills, through medium undergrowth; ascend a gradual E. slope.

- 1.70 Road, bears N.25°W., and S.25°E.
- 20.00 Point of spur, 100 ft. above sec. cor., projects S., approximately 6.00 chs. dist.; ascend a gradual W. slope
- 24.80 Wash, 20 lks. wide, 2 ft. deep, drains S.30°E., 10 ft. below point of spur; ascend a gradual E. slope.
- 35.60 Spur, 80 ft. above wash, projects S.10°E., approximately 3 chs. dist.; descend a gradual W. slope.
- 40.05 On a gradual W. slope, 40 ft. below spur.
- Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked
- S 27

S 34

1934
- raise a mound
of stone, 3 ft. base, 2 ft. high, N. of cor.
- 43.50 Wash, drains S.60°E.; ascend a gradual SE. slope.
- 48.30 Wash, drains S.50°E.
- 55.00 Low spur, 60 ft. above $\frac{1}{4}$ sec. cor., projects S.; thence along rolling S. slope.

SUBDIVISION OF T. 18 S., R. 11 W.

Chains

- 59.10 Wash, drains S.
- 64.80 Wash, drains S.
- 74.10 Wash, drains S.10°E.
- 77.50 Wash, drains S.20°E.; ascend a gradual SE. slope.
- 80.10 The cor. of secs. 27, 28, 33, and 34, 20 ft. above spur.

Land, low, rolling hills, with a general easterly exposure, and drainage on the E. 20.00 chs., and southerly on the balance of the mile.

Soil, gravelly and clay loam, with scattered rocks on the surface; 3rd rate.

No timber.

Undergrowth, medium shadscale and greasewood.


Fair growth of browse for grazing.

N. 0°01'W., bet. secs. 27 and 28.

Over high, rolling hills, through medium dense undergrowth; ascend a gradual SE. slope.

- 6.30 Head of wash, drains E., 2.00 chs. thence S.
- 17.30 Long Ridge, 150 ft. above sec. cor., bears E. and W.; also old road along ridge; descend a gradual NW. slope.
- 24.00 Head of draw, drains N.50°W.
- 30.70 Low spur, projects W.
- 33.10 Draw, 40 ft. below ridge, drains W.; ascend a gradual S. slope.
- 36.02 A limestone, 16x12x4 ins., marked $\frac{1}{4}$ on W. face, firmly set in the ground, bears W., 1.48 chs. dist. I destroy all evidence of this stone.
- 40.00 On gradual S. slope, 30 ft. above draw.

Set an iron post, 3 ft. long, 1 in. diam., 24 ins. in the ground, to solid rock, and in a mound of stone, to top, for $\frac{1}{4}$ sec. cor., with brass cap marked



raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

- 43.40 Spur, 20 ft. above $\frac{1}{4}$ sec. cor., projects N.60°W.; descend a gradual N. slope.

SUBDIVISION OF T. 18 S., R. 11 W.

Chains

- 54.70 Draw, 50 ft. below spur, drains W.; ascend a gradual S. slope.
- 60.20 Spur, 10 ft. above draw, projects N.60°W.; descend a gradual NE. slope.
- 74.70 Draw, 50 ft. below spur, drains N.60°W.; ascend a gradual SW. slope.
- 77.20 A limestone, 15x14x6 ins., marked 3 notches on E. edge, and 2 notches on S. edge, firmly set in the ground, bears W. 1.63 chs. distant. I destroy all evidence of this stone.
- 80.00 On a gradual SW. slope, 10 ft. above draw.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, with broken glass deposited around post, for corner of secs. 21, 22, 27, and 28, with brass cap marked

T18S	R11W
S21	S22
S28	S27
1934	

raise a mound

of stone, 3 ft. base, 2 ft. high, W. of cor.

Land, high, rolling hills, with a southerly exposure, and drainage on S. 17.00 chs., and westerly on the balance of the mile.

Soil, sandy and clay loam, with scattered rocks on the surface; 3rd rate.

No timber.

Undergrowth, medium dense shadscale and desert grass.

Fair growth of browse for grazing.

East, on a random line, bet. secs. 22 and 27.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.13 Intersect the cor. of secs. 22, 23, 26, and 27.

Thence

West, on true line bet. secs. 22 and 27.

Over high, rolling hills, through medium dense undergrowth; ascend an abrupt E. slope.

6.30 Old road, bears N. and S.

22.90 Long Ridge, 315 ft. above sec. cor., bears N. and S.; descend a gradual W. slope.


SUBDIVISION OF T. 18 S., R. 11 W.

Chains

38.70 Draw, 50 ft. below ridge, drains N.50°W.; ascend a gradual NE. slope.

40.065 On a gradual NE. slope.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked



raise a mound

of stone, 4 ft. base, 4 ft. high, N. of cor.

41.74 A limestone, 7x6x5 ins., marked $\frac{1}{4}$ on N. face, firmly set in the ground, bears S. 2.33 chs. distant. I destroy all evidence of this stone.

51.30 Spur, 10 ft. above $\frac{1}{4}$ sec. cor., projects N.40°W.; descend a gradual W. slope.

62.40 Head of draw, drains N.50°W.; descend a rolling NW. slope.

70.80 Low spur, projects N.50°W.; descend a gradual SW. slope.

80.13 The cor. of secs. 21, 22, 27, and 28, 80 ft. below spur at 51.30 chs.

Land, high, rolling hills, with a general easterly exposure, and drainage on E. 23.00 chs., and northwesterly on the balance of the mile.

Soil, sandy and clay loam, with scattered rocks on the surface; 3rd rate.

No timber.

Undergrowth, medium dense shadscale.

Fair growth of browse for grazing.

N.0°01'W., bet. secs. 21 and 22.

Over high, rolling hills, through medium undergrowth; ascend a gradual SW. slope.

.10 Spur, projects N.75°W.; descend a gradual NE. slope.

10.70 Draw, 30 ft. below sec. cor., drains N.70°W.; ascend a gentle SW. slope.

15.00 Spur, 40 ft. above draw, projects W.; descend a gradual rolling NE. slope.

20.30 Small draw, drains N.65°W.

26.00 Low spur, projects N.65°W.

36.20 A limestone, 12x6x6 ins., marked $\frac{1}{4}$ on W. face, firmly set in the ground, bears W. 1.80 chs. distant. I destroy all

SUBDIVISION OF T. 18 S., R. 11 W.

Chains

entire

evidence of this stone.

39.20 Wash, drains NW.

40.00 On a gentle SW. slope, 70 ft. below spur at 15.00 chs.

Set an iron post, 3 ft. long, 1 in. diam., 9 ins. in the ground, to solid rock, and in a mound of stone, to top, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$
 S21 | S22
 1934

raise a mound
of stone, 4 ft. base, 3 ft. high, W. of cor.

43.90 Small draw, drains N.70°W.; ascend a gradual SW. slope.

57.00 Low spur, projects N.65°W.

62.10 Small draw, drains N.65°W.

65.00 Long Ridge, 40 ft. above $\frac{1}{4}$ sec. cor., bears NW. and SE.; descend a gradual NE. slope.

80.00 On a gradual NE. slope, 100 ft. below ridge.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, with broken glass deposited around post, for cor. of secs. 15, 16, 21, and 22, with brass cap marked

T18S | R11W
 S16 | S15
 S21 | S22
 1934

raise a mound
of stone, 3 ft. base, 3 ft. high, W. of cor.

Land, high, rolling hills, with a general westerly exposure and drainage.

Soil, gravelly, and clay loam, with scattered rocks on the surface; 3rd rate.

No timber.

Undergrowth, medium dense shadscale.

Fair growth of browse for grazing.

East, on a random line bet. secs. 15 and 22.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

30.08 Intersect N. and S. line, 2 lks. S. of the cor. of secs. 14, 15, 22, and 23.

Thence

S.89°59'W., on true line bet. secs. 15 and 22.

Over rolling land, through medium dense undergrowth; ascend a gradual E. slope.

24.50 Wash; 130 lks: wide, drains N.60°E.

SUBDIVISION OF T. 18 S., R. 11 W.

Chains

- 34.10 Wash, drains N. 15° E.
- 36.70 Wash, drains N. 20° E.
- 40.04 On a gradual NE. slope, 20 ft. above sec. cor.
Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground to solid rock, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$ S 15
 S 22
 1934

raise a

mound of stone, 3 ft. base, 3 ft. high, N. of cor.

- 43.30 Wash, drains N.
- 57.20 Wash, drains N.
- 70.10 East base of hills, bears NW. and SE.
- 73.44 Old road, bears NW. and SE.
- 80.08 The cor. of secs. 15, 16, 21, and 22, 140 ft. above $\frac{1}{4}$ sec. cor.
Land, rolling, with a general easterly exposure and drainage.
Soil, sandy and clay loam, 3rd rate.
No timber.
Undergrowth, medium growth of shadscale and greasewood.
Fair growth of browse for grazing.

N. 0° 01' W., bet. secs. 15 and 16.

Over rolling, hilly land, through medium undergrowth; descend gradually along a steep E. slope.

- 19.30 Old road at base of hills, bears N. 35° W. and S. 35° E., thence over rolling land, along gradual E. slope.
- 40.00 On a gradual E. slope, 230 ft. below sec. cor.
Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$\frac{1}{4}$ S16 | S15
 1934

raise a

mound of stone, 4 ft. base, 3 ft. high, W. of cor.

- 77.50 A limestone, 15x9x6 ins., mkd. 4 notches on S. edge, and 3 notches on E. edge, firmly set in the ground, bears W. of line 3.89 chs. dist. I destroy all evidence of this stone.
- 80.00 On a gradual E. slope, 70 ft. below $\frac{1}{4}$ sec. cor.

SUBDIVISION OF T. 18 S., R. 11 W.

Chains

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, with broken glass deposited around post, for cor. of secs. 9, 10, 15, and 16, with brass cap mkd.

T18S | R11 W.

S9 | S10

S16 | S15

1934

raise a

mound of stone, 4 ft. base, 4 ft. high, W. of cor.

Land, rolling, with a general easterly exposure and drainage.

Soil, sandy and clay loam, 3rd rate.

No timber.

Undergrowth, medium growth of shadscale.

Fair growth of browse for grazing.

N. 89°59' E., on a random line bet. secs. 10 and 15.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.06 Intersect the cor. of secs. 10, 11, 14, and 15.

Thence

S. 89°59' W., on true line bet. secs. 10 and 15.

Over gently rolling land, through medium dense undergrowth; ascend a gentle NE. slope.

15.10 Bottom of swale, drains N. 10° E.

40.03 On a gentle NE. slope, 40 ft. above sec. cor.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with a brass cap mkd.

S 10

S 15

1934

raise a

mound of stone, 4 ft. base, 3 ft. high, N. of cor.

43.90 A limestone, 12x5x4 ins., mkd. $\frac{1}{4}$ on N. face, firmly set in the ground, bears S. 2.20 chs. dist. I destroy all evidence of this stone.

64.10 Head of wash, drains N. 30° W.

80.06 The cor. of secs. 9, 10, 15, and 16.

Land, gently rolling, with a general northeasterly exposure and drainage.

Soil, sandy and clay loam, 3rd rate.

No timber.

SUBDIVISION OF T. 18 S., R. 11 W.

Chains

Undergrowth, medium dense shadscale.

Fair growth of browse for grazing.

N. 0° 01' W., bet. secs. 9 and 10.

Over gently rolling land, along a gradual NE. slope, through medium dense undergrowth.

13.00 Small wash, drains N. 30° E.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$\frac{1}{4}$
 S9 | S10
 1934

raise a

mound of stone, 4 ft. base, 2 $\frac{1}{2}$ ft. high, W. of cor.

57.40 Soap Wash, 20 lks. wide, 8 ft. deep, drains S. 70° E.; ascend a gradual S. slope.

75.00 Top of rise, 40 ft. above $\frac{1}{4}$ sec. cor., bears E. and W., thence over gently rolling land.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, with broken glass deposited around post, for cor. of secs. 3, 4, 9, and 10, with brass cap mkd.

T18S | R11W
 S4 | S3
 S9 | S10
 1934

raise a

mound of stone, 4 ft. base, 3 ft. high, W. of cor.

Land, gently rolling, with a general northeasterly exposure, and drainage on the S. half mile, and southeasterly on the N. half mile.

Soil, sandy and clay loam, 3rd rate.

No timber.

Undergrowth, medium growth of shadscale.

Fair growth of browse for grazing.

N. 89° 59' E., on a random line bet. secs. 3 and 10.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.10 Intersect N. and S. line, 7 lks. N. of the cor. of secs. 2, 3, 10, and 11.

Thence

N. 89° 58' W., on true line bet. secs. 3 and 10.

SUBDIVISION OF T. 18 S., R. 11 W.

Chains

Over gently rolling land, through medium dense undergrowth

- 4.30 A limestone, 6x4x4 ins., mkd. 5 notches on S. edge, and 2 notches on E. edge, firmly set in the ground, bears S. 30 lks. dist. I destroy all evidence of this stone.
- 40.05 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

S 3
 ———
 S 10
 1934

raise a

mound of stone, 4 ft. base, 3 $\frac{1}{2}$ ft. high, N. of cor.

- 80.10 The cor. of secs. 3, 4, 9, and 10.

Land, gently rolling, with a general southeasterly exposure and drainage.

Soil, sandy and clay loam, 3rd rate.

No timber.

Undergrowth, medium dense shadscale and greasewood.

Fair growth of browse for grazing.

N. 0°01' W., on true line bet. secs. 3 and 4.

Over gently rolling land, through medium dense undergrowth

- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

S4 | S3
 1934

raise a

mound of stone, 4 ft. base, 3 ft. high, W. of cor.

- 55.90 State Highway between Delta, Utah, and Ely, Nevada, bears E. and W.

- 79.80 Old road, bears E. and W.

- 82.63 Intersect N. bdy. of Tp., 5.06 chs., dist., E. of cor. of secs. 33 and 34, heretofore described.

At point of intersection.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for closing cor. of secs. 3 and 4, with brass cap mkd.

T17S R11W
 S34
 ———
 S4 | S3
 T18S R11W
 CC
 1934

raise a

SUBDIVISION OF T.18 S.11 R.11 W.

Chains

mound of stone, 3 ft. base, 2½ ft. high, S. of cor.

Land, gently rolling, with a general southeasterly exposure and drainage.

Soil, sandy and clay loam 3rd rate.

No timber.

Undergrowth, medium dense shadscale and greasewood.

Fair growth of browse for grazing.

From the cor. of secs. 27, 28, 32, and 34.

West, on a random line bet. secs. 28 and 33.

40.00 Set temp. ¼ sec. cor.

80.00 Set temp. cor. for secs. 28, 29, 32, and 33,

Thence

S. 0°02'E., on a random line bet. secs. 32 and 33.

40.00 Set temp. ¼ sec. cor.

84.39 Intersect S. bdy. of Twp., 14 lks. E. of the cor. of secs. 4, 5, 32, and 33, heretofore described.

Thence, from the cor. of secs. 4, 5, 32, and 33.

N. 0°02' W., on true line bet. secs. 32 and 33.

Over gently rolling land, through medium dense undergrowth.

3.50 Old road, bears E. and W.

44.39 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with broken glass deposited around post, for ¼ sec. cor., with brass cap mkd.



raise a

mound of stone, 2 ft. base, 2 ft. high, W. of cor.

84.30 Small wash, drains S. 50° W.

84.39 On N. edge of small wash.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground; with broken glass deposited around post, for the cor. of secs. 28, 29, 32, and 33; with brass cap mkd.



raise a

mound of stone, 4 ft. base, 3½ ft. high, W. of cor.

SUBDIVISION OF T.1B S.11 W.

SHEETS

Chains

Land, gently rolling, with a general southwesterly exposure and drainage.

Soil, sandy and clay loam, 3rd rate.

No timber.

Undergrowth, medium dense shadscale and greasewood.

Fair growth of browse for grazing.

From the cor. of secs. 27, 28, 33, and 34.

West, on sectional correction line, bet. secs. 28 and 33.

Over rolling hills, through medium dense undergrowth; ascend a gradual E. slope.

14.70 Long ridge, 100 ft. above sec. cor., bears N. and S.; also road along top of ridge; descend a gradual rolling SW. slope.

15.30 Wash, drains S., approximately 3.00 chs. dist. to main drainage.

34.60 Wash, 20 lks. wide, 2 ft. deep, 70 ft. below ridge, drains N. 80° W., thence along a gentle NE. slope.

40.07 On a gentle NE. slope.

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$\frac{1}{4}$ S 28
 S 33
 1934

raise a

mound of stone, 3 ft. base, 2 $\frac{1}{2}$ ft. high, N. of cor.

55.00 Low, wide spur, projects N.

56.20 W. edge of spur, bears N. and SE.; descend a gradual W. slope.

64.80 Wash, drains S. 10° W., approximately 3.00 chs., thence W.; also base of hills, bears N. 10° E. and SE.; thence over gently rolling land.

79.70 Wash, drains S. 45° W.

80.14 The cor. of secs. 28, 29, 32, and 33, 70 ft. below $\frac{1}{4}$ sec. cor.

Land, rolling hills, on E. 65.00 chs., and gently rolling land on balance of mile, with a general southerly exposure, and drainage on E. half mile, and westerly on W. half.

Soil, gravelly, sandy and clay loam, 3rd rate.

No timber.

Undergrowth, medium dense shadscale and greasewood.

SUBDIVISION OF T.18 S., R.11 W.

Chains

Fair growth of browse for grazing.

N. 0° 02' W., bet. secs. 28 and 29.

Over rolling land, through medium dense undergrowth; ascend a gradual SW. slope.

5.00 Base of low hills, bears E. and N. 60° W.

38.00 Top of rise, 60 ft. above sec. cor., bears E. and W.; descend a gradual N. slope.

40.00 On a gradual N. slope, 10 ft. below rise.

Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground, to solid rock, with limestone, 4x4x2 ins., mkd. X, deposited at base, and broken glass deposited around post, and in a mound of stone to top, for 1/2 sec. cor., with a brass cap mkd.



raise a

mound of stone, 2 ft. base, 2 ft. high, W. of cor.


52.80 Small draw, 30 ft. below rise, drains N. 70° W.; ascend a gradual SW. slope.

68.00 Top of rise, 70 ft. above draw; bears N. 50° W. and S. 50° E.; descend a gradual NE. slope.

76.01 A limestone, 7x6x4 ins., firmly set in the ground, mkd. 4 notches on E. edge, and 2 notches on S. edge, bears W. 2.28 chs. distant. I destroy all evidence of this stone.

80.00 on a gradual NE. slope, 30 ft. below rise:

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, with broken glass deposited around post, for cor. of secs. 20, 21, 28, and 29, with brass cap mkd.



raise a

mound of stone, 4 ft. base, 3 ft. high, W. of cor.

Land, low rolling hills, with a general westerly exposure and drainage.

Soil, gravelly, sandy and clay loam, with scattered rocks on the surface, 3rd rate.

No timber.

Undergrowth, medium dense shadscale and greasewood.

Fair growth of browse for grazing.

SUBDIVISION OF T.18 S., R.11 W.

Chains	
	East, on a random line bet. secs. 21 and 28.
40.00	Set temp. $\frac{1}{4}$ sec. cor.
80.10	Intersect the cor. of secs. 21, 22, 27, and 28.
	Thence
	West, on true line bet. secs. 21 and 28.
	Over rolling hills, through medium dense undergrowth; descend a gradual SW. slope.
6.60	Draw, drains N. 50° W.; thence over general N. exposure.
38.50	Wash, drains N. 40° W.
40.05	On gently rolling land, 65 ft. below sec. cor.
	Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
	$\begin{array}{r} S\ 21 \\ \frac{1}{4} \\ \hline S\ 28 \\ 1934 \end{array}$
	raise a
	mound of stone, 3 ft. base, 2 ft. high, N. of cor.
	Thence along rolling NW. slope.
49.00	Low spur, projects N. 20° W.
54.10	Wash, drains N. 20° W.
62.40	Wash, drains N. 10° W.
69.00	Low spur, projects N. 10° W.
79.60	Wash, drains N. 60° W.
80.10	The cor. of secs. 20, 21, 28, and 29, 20 ft. below $\frac{1}{4}$ sec. cor.
	Land, rolling hills, with a general northwesterly exposure and drainage.
	Soil, sandy and clay loam, 3rd rate.
	No timber.
	Undergrowth, shadscale and greasewood.
	Fair growth of browse for grazing.
	N. 0°02' W., bet. secs. 20 and 21.
	Over low hills, along rolling W. slope, through medium dense undergrowth.
.90	Wash, drains W.
9.00	Wash, drains W.
18.00	Top of rise, 20 ft. above sec. cor.; bears E. and W.; descend a gradual N. slope.

Chains

30.70 Wash, 40 ft. below rise, drains N. 70° W.; ascend a gradual SW. slope.

36.10 A limestone, 12x6x5 ins., mkd $\frac{1}{4}$ on W. face, firmly set in the ground, bears W. 2.75 chs. dist. I destroy all evidence of this stone.

37.00 Low spur, 20 ft. above draw, projects W.; descend a gradual N. slope.

40.00 On a gradual N. slope.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with broken glass deposited around post, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

	$\frac{1}{4}$	
S20	S21	V
	1934	

raise a

mound of stone, 2 ft. base, 2 ft. high, W. of cor..

47.90 Draw, 30 ft. below spur, drains W.; ascend a gradual S. slope.

59.00 Low spur, 20 ft. above draw, projects W.; descend a gradual N. Slope.

65.00 Head of draw, drains S. 70° W.

76.43 A limestone, 16x9x6 ins., firmly set in ground, marked 4 notches on E. edge, and 2 on S. edge, bears W. 3.20 chs. dist. I destroy all evidence of this stone.

80.00 On gentle W. slope, 10 ft. below spur.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, with broken glass deposited around post, for the cor. of secs. 16, 17, 20, and 21, with brass cap marked

T18S	R11W	
S17	S16	
S20	S21	
	1934	

raise a

mound of stone, 4 ft. base, 3 ft. high, W. of cor.

Land, low rolling hills, with a general westerly exposure and drainage.

Soil, sandy and clay loam, 3rd rate.

No timber.

Undergrowth, medium dense shadscale.

Fair growth of browse for grazing.

East, on a random line bet. secs. 16 and 21.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.06 Intersect N. and S. line, 12 lks. S. of the cor. of secs. 15, 16, 21, and 22.

SUBDIVISION OF T. 18 S., R. 11 W.

Chains

Thence

S. 89° 55' W., on true line bet. secs. 16 and 21.

Over high rolling hills, through medium dense undergrowth; ascend an abrupt E. slope.

- 4.20 Top of abrupt ascent, bears N. 15° W. and S. 20° E.; ascend a gentle E. slope.
- 8.50 Long ridge 110 ft. above sec. cor., bears NW. and SE.; descend a gradual SW. slope.
- 29.00 Junction of draws, from NE. and SE., 90 ft. below ridge, drain NW.; ascend a gradual NE. slope.
- 33.00 Spur, 10 ft. above draw, projects NW.; descend a gradual SW. slope.
- 37.80 Draw, 30 ft. below spur, drains NW.; ascend a gradual E. slope.
- 40.03 On a gradual E. slope, 40 ft. above draw.
Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with a brass cap mkd.

$\frac{1}{4}$ S 16

 S 21
 1934

raise a

mound of stone, 2 ft. base, 18 ins. high, N. of cor.

- 48.00 Spur, 40 ft. above $\frac{1}{4}$ sec. cor., projects N.; descend a gradual W. slope.
- 56.20 Head of draw, 50 ft. below spur, drains NW.; ascend a gradual NE. slope.
- 60.70 Spur, 30 ft. above head of draw, projects N. 20° W.; descend a gradual W. slope.
- 64.30 Draw, 30 ft. below spur, drains N. 20° W.; ascend a gradual NE. slope.
- 71.60 Spur, 40 ft. above draw, projects NW.; descend a gradual SW. slope.
- 80.06 The cor. of secs. 16, 17, 20, and 21, 50 ft. below spur.

Land, high rolling hills, with a general northwesterly exposure and drainage.

Soil, sandy and clay loam, with the scattered rocks on the surface, 3rd rate.

No timber.

Undergrowth, medium dense shadscale, mountain-rush and desert grass.

Fair growth of browse for grazing.

N. 0° 02' W., bet. secs. 16 and 17.

Chains

Over high rolling hills, through medium dense undergrowth; ascend a gradual SW. slope.

10.00 Spur, 30 ft. above sec. cor., projects N. 40° W.; descend a gradual NE. slope.

30.70 Draw, 150 ft. below spur, drains N. 40° W.; ascend a gradual S. slope.

39.00 S. rim of spur, bears NW. and SE.

40.00 On top of spur, 90 ft. above draw, projects W.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$\begin{array}{c} \uparrow \\ \text{S17} | \text{S16} \\ \hline 1934 \end{array}$

raise a

mound of stone, 2 ft. base, 18 ins. high, W. of cor.

45.00 N. rim of spur; descend a gradual N. slope.

55.40 Draw, 100 ft. below $\frac{1}{4}$ sec. cor., drains W.; ascend a gradual SW. slope.

61.50 W. edge of saddle on spur, 70 ft. above draw, projects NW.; descend a steep NE. slope.

65.10 Base of hills, bear NW. and SE., thence over rolling land, sloping NE.

80.00 On rolling land, 150 ft. below spur.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 8, 9, 16, and 17, with brass cap mkd.

$\begin{array}{c} \text{T18S} | \text{R11 W} \\ \hline \text{S8} | \text{S9} \\ \hline \text{S17} | \text{S16} \\ \hline 1934 \end{array}$

raise a

mound of stone, 2 ft. base, 18 ins. high, W. of cor.

Land, high rolling hills on S. 65.10 chs., and rolling on the balance of the mile, with a general northwesterly exposure, and drainage on the S. 61.00 chs., and north-easterly on the balance of the mile.

Soil, gravelly, sandy and clay loam, with scattered rocks on the surface, 3rd rate.

No timber.

Undergrowth, medium dense shadscale and mountain-rush.

Fair growth of browse for grazing.

N. 89°55' E., on a random line bet. secs. 9 and 16.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

72
SUBDIVISION OF T. 18 S., R. 11 W.

Chains

80.04 Intersect N. and S. line, 12 lks. N. of the cor. of secs. 9, 10, 15, and 16.

Thence

West, on true line bet. secs. 9 and 16.

Over gently rolling land, through medium dense undergrowth.

40.02 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

S 9

S 16
1934

raise a

mound of stone, 4 ft. base, 4 ft. high, N. of cor.

43.80 Old road, bears N. 40° W. and S. 40° E.

44.60 Wash, drains N. 50° E.

80.04 The cor. of secs. 8, 9, 16, and 17.

Land, gently rolling, with a general northeasterly exposure and drainage.

Soil, sandy and clay loam, 3rd rate.

No timber.

Undergrowth, medium dense shadscale and greasewood.

Fair growth of browse for grazing.

N. 0°02' W., bet. secs. 8 and 9.

Over gently rolling land, through medium dense undergrowth.

16.60 Wash, 15 lks. wide, 3 ft. deep, drains NE.; ascend a gentle S. slope.

25.00 Top of rise, 10 ft. above sec. cor., bears E. and W.; descend a gentle N. slope 20 ft. to

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

S 8 | S 9
1934

raise a

mound of stone, 2 ft. base, 18 ins. high, W. of cor.

49.10 Old road, bears N. 40° W., and S. 40° E.

56.40 Wash, 15 lks. wide, 1 ft. deep, drains NE.

57.60 Same wash, drains SW.

71.40 Same wash, drains NE.

SUBDIVISION OF T. 18 S., R. 11 W.

Chains

80.00 On a gradual E. slope, 20 ft. below $\frac{1}{4}$ sec. cor.
 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. to secs. 4, 5, 8, and 9. with brass cap mkd.

T18S	R11 W
S5	S4
S8	S9
1934	

raise a mound of stone, 2 ft. base, 18 ins. high, W. of cor.

Land, gently rolling, with a general northeasterly exposure and drainage.

Soil, sandy and clay loam, 3rd rate.

No timber.

Undergrowth, medium dense shadscale and mountain-rush.

Fair growth of browse for grazing.

East, on a random line bet. secs. 4 and 9.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.00 Intersect N. and S. line, 3 lks. S. of the cor. of secs. 3, 4, 9, and 10.

Thence

S. 89°59' W., on true line bet. secs. 4 and 9.

Over gently rolling land, through medium dense undergrowth; descend a gradual SW. slope.

40.00 On a gradual SW. slope, 70 ft. below sec. cor.

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

S 4
S 9
1934

raise a mound of stone, 4 ft. base, 3 ft. high, N. of cor.

57.10 Soap Wash, 40 lks. wide, 5 ft. deep, drains S. 60° E.; ascend a gradual E. slope.

73.90 Top of rise, 10 ft. above $\frac{1}{4}$ sec. cor., projects N.

77.70 Wash, drains N. 10° E.

80.00 The cor. of secs. 4, 5, 8, and 9, 10 ft. below rise.

Land, rolling, with a southeasterly exposure, and drainage on the E. 57.00 chs., and northerly on the balance of the mile.

Soil, sandy and clay loam, 3rd rate.

Chains

No timber.
 Undergrowth, medium dense shadscale and greasewood.
 Fair growth of browse for grazing.


N. 0°02' W., on true line bet. secs. 4 and 5.

Over gently rolling land, through medium dense undergrowth

7.00 Soap Wash, 40 lks. wide, 5 ft. deep, drains S. 60° E.

11.90 Old road, bears E. and W.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground; for $\frac{1}{4}$ sec. cor., with brass cap mkd.



raise a mound of stone, 2 ft. base, 18 ins. high, W. of cor.


49.00 State Highway, bet. Delta, Utah, and Ely, Nevada, bears N. 85° E. and S. 85° W.

75.90 Old road, bears E. and W.

82.69 Intersect N. bdy. of Tp., 5.14 chs. dist., E. of the cor. of secs. 32 and 33, heretofore described.

On top of rise.

Set an iron post, 3 ft. long, 2 ins. diam., 6 ins. in the ground, to bedrock, with a limestone, 4x4x3 ins., mkd. X, deposited at base, and in a mound of stone, 5 $\frac{1}{2}$ ft. base, to top, for closing cor. of secs. 4 and 5, with brass cap mkd.



Land, gently rolling, with a general southeasterly exposure and drainage.

Soil, sandy and clay loam, 3rd rate.

No timber.

Undergrowth, medium dense shadscale, budsage and mountain-rush.

Fair growth of browse for grazing.

From the cor. of secs. 28, 29, 32, and 33.

Chains

- West, on a random line bet. secs. 29 and 32.
- 40.00 Set temp. $\frac{1}{4}$ sec. cor.
- 80.00 Set temp. cor. of secs. 29, 30, 31, and 32.
- From the temp. cor. of secs. 29, 30, 31, and 32.
- S. $0^{\circ}03'$ E., on a random line bet. secs. 31 and 32.
- 40.00 Set temp. $\frac{1}{4}$ sec. cor.
- 85.33 Intersect S. bdy. of Tp. 30 lks. E. of the cor. of secs. 5, 6, 31, and 32, heretofore described.
- Thence from the cor. of secs. 5, 6, 31, and 32.
- N. $0^{\circ}03'$ W., on true line bet. secs. 31 and 32.
- Over rolling land, through medium dense undergrowth.
- 15.70 Road, bears E. and W.
- 20.00 South base of low rolling hills, bears NE. and SW.; ascend a gradual S. slope.
- 39.85 A sandstone, 8x7x4 ins., above ground, mkd. $\frac{1}{4}$ on W. face, firmly set in the ground, bears W., 44 lks. dist., I destroy all evidence of this stone.
- 45.33 On top of rise and in old road, 70 ft. above sec. cor., bears N. 70° E and S. 70° W.
- Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground to solid rock, with broken glass deposited around post, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
- | | |
|-------|-----|
| S31 | S32 |
| 1934. | |
- raise a
- mound of stone, 2 $\frac{1}{2}$ ft. base, 2 ft. high, W. of cor.
- Descend a gradual NW. slope.
- 54.60 Head of small draw, 20 ft. below $\frac{1}{4}$ sec. cor., drains W.;
- 75.50 Top of rise, 10 ft. above draw, bears E. and W.; descend a gradual NW. slope.
- 85.33 On a gradual NW. slope.
- Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 29, 30, 31, and 32, with brass cap mkd.
- | | |
|------|------|
| T18S | R11W |
| S30 | S29 |
| S31 | S32 |
| 1934 | |
- raise a
- mound of stone, 4 ft. base, 3 ft. high, W. of cor.
- Land, low rolling hills, with a general westerly exposure and drainage.

Chains

Soil, sandy and clay loam, 3rd rate.

No timber.

Undergrowth, medium dense shadscale and greasewood;

Fair growth of browse for grazing.

From the cor. of secs. 28, 29, 32, and 33.

West, on sectional correction line bet. secs. 29 and 32.

Over rolling land; through medium dense undergrowth.

30.75 Old road, bears NW. and SE.

40.15 On rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$\frac{1}{4}$ S 29

S 32

1934

raise a

mound of stone, 3 ft. base, 2 ft. high, N. of cor.

50.00 Base of low hills, bears NE. and SW.; ascend a gentle SE. slope.

55.10 Top of low rise, 20 ft. above sec. cor., bears NE. and SW.; descend a gentle NW. slope.

80.30 The cor. of secs. 29, 30, 31, and 32, 20 ft. below rise.

Land, rolling on E. 50.00 chs., and low rolling hills on the balance of the mile, with a general southwesterly exposure and drainage.

Soil, sandy and clay loam, 3rd rate.

Undergrowth, medium dense shadscale and greasewood.

Fair growth of browse for grazing.

West, on sectional correction line bet. secs. 30 and 31.

Over low rolling hills, through medium dense undergrowth.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground, to solid rock, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

S 30

$\frac{1}{4}$ S 31

1934

raise a

mound of stone, 3 ft. base, 2 $\frac{1}{2}$ ft. high, N. of cor.

Descend a gradual W. slope.

Chains

80.69 Intersect W. bdy. of Tp. 6.43 chs. dist., N. 0°01' W., of the cor. of secs. 25 and 36, heretofore described.

On a gradual SW. slope, 60 ft. below $\frac{1}{4}$ sec. cor.

Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, for closing cor. of secs. 30 and 31, with brass cap mkd.

T18S	T18S'
R12W	S30 C
S25	C
	S31
	R11W'

1934

raise a

mound of stone, 3 ft. base, 2 $\frac{1}{2}$ ft. high, E. of cor.

Land, low rolling hills, with a general westerly exposure and drainage.

Soil, gravelly and clay loam, 3rd rate.

No timber.

Undergrowth, medium dense shadscale and greasewood.

Fair growth of browse for grazing.

From the cor. of secs. 29, 30, 31, and 32.

N. 0°03' W., bet. secs. 29 and 30.

Over low rolling hills, through medium dense undergrowth; descend a gradual N. slope.

17.70 Wash, 30 ft. below sec. cor., drains W.; ascend a gentle S. slope.

38.59 Road, bears NW. and SE.

40.00 On rise, 30 ft. above wash.

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

S30	⁴	S29
		1934

raise a

mound of stone, 3 ft. base, 2 $\frac{1}{2}$ ft. high, W. of cor.

Descend a gradual N. slope.

56.20 Wash, 20 ft. below $\frac{1}{4}$ sec. cor., drains W.; ascend a gradual S. slope.

80.00 On gentle S. slope.

Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, for cor. of secs. 19, 20, 29, and 30, with

SUBDIVISION OF TOWNS., R. 11 W.

Chains

brass cap mkd.

T185	R11W
S19	S20
S30	S29

1934

raise a

mound of stone, 3 ft. base, 3 ft. high, W. of cor.

Land, low rolling hills, with a general westerly exposure and drainage.

Soil, gravelly, and clay loam, 3rd rate.

No timber.

Undergrowth, medium dense shadscale and greasewood.

Fair growth of browse for grazing.

East, on a random line bet. secs. 20 and 29.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.26 Intersect N. and S. line, 7 lks. S. of the cor. of secs. 20, 21, 28, and 29.

Thence

S. 89°57' W., on true line bet. secs. 20 and 29.

Over low rolling hills, through medium dense undergrowth;

5.00 Wash, drains N. 20° E.; ascend a gradual NE. slope.

15.00 Top of rise, 20 ft. above sec. cor., bears N. 35° W. and S. 35° E.; descend a gradual SW. slope.

39.90 Wash, 20 lks. wide, 90 ft. below rise, drains N. 60° W.; ascend a gradual NE. slope.

40.13 On a gradual NE. slope.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$\frac{1}{4}$	S 20
	S 29

1934

raise a

mound of stone, 4 ft. base, 3 ft. high, N. of cor.

45.00 Top of ascent, projects N.; descend a gentle W. slope.

54.90 Wash, 20 lks. wide, drains S. 50° W.

80.26 The cor. of secs. 19, 20, 29, and 30.

Land, low rolling hills, with a general northwesterly exposure and drainage.

Soil, sandy and clay loam, 3rd rate.

79
SUBDIVISION OF T. 18 S., R. 11 W.

Chains

No timber.
Undergrowth, medium dense shadscale and greasewood.
Fair growth of browse for grazing.

West, on true line bet. secs. 19 and 30.

Over rolling land, through medium dense undergrowth.

36.40 Road, bears NW. and SE.

40.00 On rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{2}$ sec. cor., with brass cap mkd.

3 19
—
3 30
1934

raise a

mound of stone, 3 ft. base, 3 ft. high, N. of cor.

53.70 Wash, drains NW., approximately 5.00 chs. dist., thence W.

81.33 Intersect W. bdy. of Tp. 6.37 chs. dist., N. 0°51' W. of the cor. of secs. 24 and 25, heretofore described.

Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, for closing cor. of secs. 19 and 30, with brass cap mkd.

T18S	T18S
R12W	R12W
324	319 C
	330 C
	R11W

1934

raise a

mound of stone, 3 ft. base, 3 ft. high, E. of cor.

Land, rolling, with a general northwesterly exposure and drainage.

Soil, gravelly and clay loam, 3rd rate.

No timber.

Undergrowth, medium dense shadscale and greasewood.

Fair growth of browse for grazing.

From the cor. of secs. 19, 20, 29, and 30.

N. 0°03' W., bet. secs. 19 and 20.

Over low rolling hills, through medium dense undergrowth; descend a gentle N. slope.

34.10 Wash, drains SW., 20 ft. below sec. cor.

SUBDIVISION OF T. 18 S., R. 11 W.

Chains

40.00 Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$\frac{1}{4}$
 S19 | S20
 1934

raise a

mound of stone, 3 ft. base, 2 $\frac{1}{2}$ ft. high, W. of cor.

Ascend a gradual S. slope.

56.00 Top of rise, 30 ft. above wash, bears E. and W.; descend a gradual N. slope.

70.00 Bottom of swale, 20 ft. below rise, drains W.; ascend a gradual S. slope.

80.00 On gradual S. slope.

Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, for cor. of secs. 17, 18, 19, and 20, with brass cap mkd.

T18S | R11W
S18 | S17
 S19 | S20
 1934

raise a

mound of stone, 3 ft. base, 3 ft. high, W. of cor.

Land, low rolling hills, with a general westerly exposure and drainage.

Soil, gravelly, and clay loam, 3rd rate.

No timber.

Undergrowth, medium dense shadscale and greasewood.

Fair growth of browse for grazing.

N. 89°57' E., on a random line bet. secs. 17 and 20.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.27 Intersect the cor. of secs. 16, 17, 20, and 21.

Thence

S. 89°57' W., on true line, bet. secs. 17 and 20.

Over low rolling hills, through medium dense undergrowth; ascend a gradual E. slope.

7.70 Low spur, 10 ft. above sec. cor., projects N. 80° W.; descend a gradual S. slope.

31.70 Wash, drains N. 80° W., approximately 5.00 chs. dist., thence SW.

39.00 Wash, drains SW.

40.135 On gradual S. slope, 130 ft. below spur.

Chains
a set

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{2}$ sec. cor., with brass cap mkd.

S 17
—
S 20
1934

raise a

mound of stone, 3 ft. base, 3 ft. high, N. of cor.

61.90 Wash, 40 ft. below $\frac{1}{2}$ sec. cor., drains N. 50° W.; ascend a gradual NE. slope.

75.30 Ridge, 60 ft. above wash, bears NW. and SE.; descend a gradual SW. slope.

80.27 The cor. of secs. 17, 18, 19, and 20, 10 ft. below spur, at W. base hills bears NW. and SE.

Land, low rolling hills, with a general northwesterly exposure and drainage.

Soil, gravelly, and clay loam, 3rd rate.

No timber.

Undergrowth, medium dense shadscale and greasewood.

Fair growth of browse for grazing.

West, on true line bet. secs. 18 and 19.

Over rolling land, through medium dense undergrowth.

40.00 On a gentle W. slope.

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{2}$ sec. cor., with brass cap mkd.

S 18
—
S 19
1934

raise a

mound of stone, 3 ft. base, 3 ft. high, N. of cor.

77.50 E. edge of clay flat, bears N. and S.

77.60 Old road, bears N. and S.

82.43 Intersect W. bdy. of Tp. 5.96 chs. dist., N. 0° 55' W., of the cor. of secs. 13 and 24, heretofore described.

On clay flat.

Set an iron post, 3 ft. long, 2 ins. in diam., 30 ins. in the ground, for closing cor. of secs. 18 and 19, with brass cap mkd.

T18S	T18S
R12W	S18 C
	—
S13	C
	S19
	R11W
	1934

Chains

and to
raise a

mound of stone, 3 ft. base, 2 ft. high, E. of cor.

Land, rolling, with a general westerly exposure and drainage.

Soil, sandy and clay loam, 3rd rate.

No timber,

Undergrowth, medium dense shadscale and greasewood.

Fair growth of browse for grazing.

From the cor. of secs. 17, 18, 19, and 20.


N. 0°03' W., bet. secs. 17 and 18.

Over low rolling hills, through medium dense undergrowth.

9.40 Ridge, bears SE. and NW.; approximately 3.00 chs. dist., thence N.; thence along rolling E. slope.

40.00 On E. slope.

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.




raise a

mound of stone, 4 ft. base, 3 ft. high, W. of cor.

80.00 On E. slope, 40 ft. above $\frac{1}{4}$ sec. cor.,

Set an iron post, 3 ft. long, 2 ins. diam., 15 ins. in the ground, to solid rock, and in a mound of stone to top, for cor. of secs. 7, 8, 17, and 18, with brass cap mkd.



raise a

mound of stone, 4 ft. base, 3 ft. high, W. of cor.

Land, low rolling hills, with a general easterly exposure and drainage.

Soil, sandy and clay loam, with scattered rocks on the surface, 3rd rate.

No timber.

Undergrowth, medium dense shadscale and greasewood.

Fair growth of browse for grazing.

N. 89°57' E., on a random line bet. secs. 8 and 17.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

Drains

00.00 Intersect N. and S. line, 5 lks. N. of the cor. of secs. 8, 9, 16, and 17.

Thence

S. 89°50' W., on true line bet. secs. 8 and 17.

Over low rolling hills, through medium dense undergrowth; ascend a gentle E. slope.

10.00 Low spur, projects N., thence over rolling N. slope.

20.00 Slope changes to NW.

40.12 On gradual NW. slope.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{2}$ sec. cor., with brass cap mkd.

S 8
—
S 17
1934

raise a

mound of stone, 4 ft. base, 4 ft. high, N. of cor.

43.70 Wash, drains N.; ascend a gradual NE. slope.

60.00 Ascend a gradual E. slope.

80.24 The cor. of secs. 7, 8, 17, and 18, 150 ft. above $\frac{1}{2}$ sec. cor.

Land, low rolling hills, with a general northerly exposure and drainage.

Soil, sandy and clay loam, with scattered rocks on the surface, 3rd rate.

No timber.

Undergrowth, medium dense shade scale greenwood.

Fair growth of browse for grazing.

West, on true line bet. secs. 7 and 18.

Over low rolling hills, through medium dense undergrowth.

2.50 Ridge, bears NW. and S.; descend a gradual W. slope.

10.20 Base of hills, bears NW. and SE., thence over gently rolling land.

40.00 On gently rolling land, 80 ft. below sec. cor.

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{2}$ sec. cor., with brass cap mkd.

S 7
—
S 18
1934

raise a

SUBDIVISION OF T. 18 S., R. 11 W.

Chains

mound of stone, 3 ft. base, 3 ft. high, N. of cor.

60.00 E. edge of clay flat, bears N. and S.

61.90 Old road, bears N. and S.

83.45 Intersect W. bdy. of Tp. 5.84 chs. dist., N. 0°37' W., of the cor. of secs. 12 and 13, heretofore described.

On clay flat.

Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, for closing cor. of secs. 7 and 18, with brass cap mkd.

T18S	T18S
R12W	
	S7 C
S12	C
	S18
	R11W
	1934

raise a

mound of stone, 3 ft. base, 2 ft. high, E. of cor.

Land, low rolling hills on the E. 10.00 chs., and gently rolling on the balance of the mile, with a general westerly exposure and drainage.

Soil, sandy and clay loam, 3rd rate.

No timber.

Undergrowth, medium dense shadscale and greasewood.

Fair growth of browse for grazing.

From the cor. of secs. 7, 8, 17, and 18.

N. 0°03' W., bet. secs. 7 and 8.

Over low rolling hills, through medium dense undergrowth; descend a gradual NE. slope.

9.30 Base of hills, bears NW. and SE., thence over gently rolling land, along a gentle E. slope.

40.00 On a gentle E. slope, 110 ft. below sec. cor.

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

	$\frac{1}{4}$
	S7 S8
	1934

raise a

mound of stone, 3 ft. base, 2 ft. high, W. of cor.

80.00 On a gentle E. slope.

Set an iron post, 3 ft. long, 2 ins. diam., 20 ins. in the ground to solid rock, and in a mound of stone to top, for cor. of secs. 5, 6, 7, and 8, with brass cap marked

T168 | R11W
 36 | 35
 37 | 38
 1934

raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Land, low rolling hills on the S. 10.00 chs., and gently rolling on the balance of the mile, with a general easterly exposure and drainage.

Soil, sandy and clay loam, 3rd rate.

Undergrowth, medium dense shadscale and greasewood.

Fair growth of browse for grazing.

N. 89°59' E., on a random line bet. secs. 5 and 8.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.28 Intersect N. and S. line, 7 lks. S. of the cor. of secs. 4, 5, 6, and 9.

Thence

S. 89°36' W., on true line bet. secs. 5 and 8.

Over gently rolling land, through medium dense undergrowth; ascend a gentle E. slope.


2.30 Top of rise, 10 ft. above sec. cor., projects N.; descend a gradual W. slope.

16.70 Wash, 30 lks. 3 ft. deep, drains N. 40° E.

20.70 Old road, bears N. 20° W. and S. 20° E.

40.14 On gently rolling land, 30 ft. below rise.

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.



raise a

mound of stone, 3 ft. base, 2 ft. high, N. of cor.

80.28 The cor. of secs. 5, 6, 7, and 8.

Land, gently rolling, with a general northeasterly exposure and drainage.

Soil, sandy and clay loam, 3rd rate.

No timber.

Undergrowth, medium dense shadscale and greasewood.

Fair growth of browse for grazing.

85
SUBDIVISION OF T. 18 S., R. 11 W.

Chains

West, on true line, bet. secs. 6 and 7.

Over gently rolling land, through medium dense undergrowth; ascend a gentle E. slope.

36.30 East base of low rolling hills, bears NW. and SE.

40.00 On a gradual E. slope, 30 ft. above sec. cor.

Set an iron post, 3 ft. long, 1 in. diam., 14 ins. in the ground to solid rock, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$\frac{1}{4}$ $\frac{S\ 6}{S\ 7}$
1934

raise a

mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

42.10 Ridge, 10 ft. above $\frac{1}{4}$ sec. cor., bears NW. and SE.; descend a gradual W. slope.

47.10 Base of hills, bears NW. and SE., thence over gently rolling land.

62.34 Old road, bears N. 20° E., and S. 20° W.

63.60 Wash, 30 lks. wide, 3 ft. deep, drains N. 20° E.

84.49 Intersect W. bdy. of Tp. 5.31 chs. dist., N. 1°05' W., of the cor. of secs. 1 and 12, 50 ft. below spur, heretofore described.

Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, for closing cor. of secs. 6 and 7, with brass cap mkd.

T18S | T18S
R12W |
S6 |
S1 |-----C
S7 |
R11W |
1934

raise a

mound of stone, 2 ft. base, 2 ft. high, E. of cor.

Land, gently rolling on the E. and W. portions; the central portion is low rolling hills, with a general easterly exposure and drainage on the E. portion, and westerly on the W. portion.

Soil, sandy and clay loam, with scattered rocks on the surface in the central portion, 3rd rate.

No timber.

Undergrowth, medium dense shadscale and greasewood.

Fair growth of browse for grasing.

From the cor. of secs. 5, 6, 7, and 8.

N. 0°03' W., on true line bet. secs. 5 and 6, growth.

SUBDIVISION OF T. 18 S., R. 11 W.

Chains

Over rolling land, through medium dense undergrowth.

36.40 State Highway bet. Delta, Utah, and Ely, Nevada, bears N.68°E., and S.68°W.

40.00 On a gentle S. slope.

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$
 36 | S5
 1934

of stone, 3 ft. base, 2 ft. high, W. of cor. raise a mound

57.10 Wash, 25 lks. wide, 5 ft. deep, drains S.80°E.

65.00 Soap Wash, 30 lks. wide, 4 ft. deep, drains S.25°E.

76.00 Old road, bears N.35°W., and S.25°E.

82.75 Intersect N. bdy. of Tp. 4.82 chs. dist., E. of the cor. of secs. 31 and 32, heretofore described.

On a gentle SW. slope.

Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, for closing cor. of secs. 5 and 6, with brass cap marked

T17S R11W
 S32

 36 | S5
 T18S R11W
 C | C
 1934

of stone, 3 ft. base, 2 $\frac{1}{2}$ ft. high, S. of cor. raise a mound

Land, rolling, with a general northeasterly exposure, and drainage on the S. half mile, and southeasterly on the N. half mile.

Soil, sandy and clay loam; 3rd rate.

No timber.

Undergrowth, medium dense shadscale and greasewood.

Fair growth of browse for grazing.

GENERAL DESCRIPTION.

The land embraced in township 18 south, range 11 west, is desert in character, with high rolling hills in the south central portion, and extending in a northwesterly direction into sec. 8, known as Long Ridge; from this ridge the land slopes to the east and west to rolling and gently rolling land. The general elevation of the township ranges from about 4700 feet to 5000 feet above sea level.

The southwest portion of the township drains westerly into clay flats; the extreme northeast portion drains

SUBDIVISION OF T. 18 S., R. 11 W.

easterly into clay flats; Soap Wash forms the main drainage of the balance of the township, entering on the north boundary near the corner of sections 31 and 32, and draining in a southeasterly direction, and leaving the township near the $\frac{1}{4}$ section corner of section 24, on the east boundary. The southeasterly portion, and extending northwesterly into sections 4 and 5, drains easterly and northeasterly. The central portion, west of the long ridge, drains westerly and northerly into Soap Wash. The northwest portion drains southeasterly.

The soil in the hilly region is a gravelly and sandy clay, with scattered limestone and volcanic rocks on the surface, and grades to heavy clay in the lowlands; there are several patches with a pebbly surface in the eastern and northern portions of the township. There are three clay flats along the west boundary of sections 7, 18 and 19. The soil in the township, in general, may be classed as third rate.

There is no timber within the township. The undergrowth is a medium dense growth of shadscale and greasewood, with a very scattered growth of desert grass, budsage and mountain rush in various portions of the township, making a fair growth of browse for grazing. There are many sheep grazed in this section during the winter months.

A State Highway, between Delta, Utah, and Ely, Nevada, passes through the extreme north portion of the township, bearing easterly and westerly. Hinckley, Utah, is the nearest postoffice, and is east about thirty miles distant. There are other roads, ungraded, through the township, passable to automobiles; these roads are used by sheepmen during the winter grazing months.

The only value of this township at the present time is for grazing during the winter months.

There were numerous stones marked for quarter-section and section corners found in the township, of which there is no official record. Ties were made to these stones, and all evidence of the stones destroyed, as described in the field notes.

There was no water found in the township. At the time of this survey, no settlers were located in the township.

There was no evidence of mineral, coal, oil or oilshale noted within the township:

The magnetic variation is 16°15'E.

FIELD ASSISTANTS.

NAMES.	CAPACITY.
Kenneth Adams	Principal Assistant
Frank Kincaid	Principal Assistant
John C. Campbell	Principal Assistant
Rudolph Olsen	Chairman
Jess Alger	Cornerman
Harold Allen	Cornerman
David Austin	Cornerman
Jesse Bailey	Flagman
Elroy Barnes	Flagman
Theodore Howard	Axman
Ray Lunt	Axman
Donald Weierman	Axman
Erwin Stratton	Axman
Elmer Kay	Axman
Douglas Cowan	Axman
Lawrence Earl	Axman
Thoren Holladay	Axman
Ernest Erickson	Axman
Le Grand Law	Axman
Eldra Jeffery	Axman
Ivan Bringham	Axman
Max Root	Axman
John Towers	Axman
Nat Stringham	Axman
Rex Iverson	Axman
Ray Hall	Axman
Darwin Larsen	Axman
Leland Greenhalgh	Axman
Floyd Utley	Axman
Wells Brunson	Flagman
James Twitchell	Axman

CERTIFICATE OF UNITED STATES SURVEYOR

Sidney R. Reese, Don Madsen and Elmo Sager, Transitmen (Temporary We I, ~~W. S. Swain~~, hereby certify upon honor that, in pursuance

of special instructions received from the District Cadastral Engineer for Utah

bearing date of the 15th day of December, 1933, we have well, faithfully, and true

our in my own proper persons and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, surveyed all those parts or portions of Dependent resurvey of the south, east and west boundaries, independent resurvey of the north boundary and survey of the subdivision of T. 18 S., R. 11 W.

of the Salt Lake Meridian, in the State of Utah, which are represented in

the foregoing field notes as having been executed by us and under our direction; and that all the corners of said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the District Cadastral Engineer for Utah

and in the specific manner described in the field notes, and that the foregoing are the original field notes of such survey.

Certified to at: Salt Lake City, Utah December 15, 1934

Sidney R. Reese
Don Madsen
Elmo Sager

Transitmen (Temporary ~~W. S. Swain~~)

APPROVAL

OFFICE OF U. S. SUPERVISOR OF SURVEYS,

Denver, Colo. MAR 7 - 1935

The foregoing field notes of the survey of Dependent resurvey of the south, east and west boundaries, independent resurvey of the north boundary and survey of the subdivision of T. 18 S., R. 11 W.

executed by Sidney R. Reese, Don Madsen and Elmo Sager, Transitmen (Temporary under his special instructions dated December 15th, 1933, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

W. S. Swain
U. S. Supervisor of Surveys.

I certify that the foregoing transcript of the field notes of the above-described surveys in ~~has been correctly copied from the original notes on file in this office.~~

U. S. Supervisor of Surveys.

Blank

Page

Blank

Page

BOOK A-506

"B"

FIELD NOTES

OF THE SURVEY OF THE

DEPENDENT RESURVEY OF A PORTION OF THE NORTH BOUNDARY

AND SUBDIVISION: INDEPENDENT RESURVEY OF THE FOURTH

STANDARD PARALLEL SOUTH, THROUGH R. 9 W.;

SURVEY OF THE WEST BOUNDARY AND A

PORTION OF THE SUBDIVISION,

COMPLETING THE SURVEY

OF T. 20 S., R. 9 W.

Of the SALT LAKE Meridian,

In the State of UTAH

EXECUTED BY

ANDREW NELSON, U. S. CADASTRAL ENGINEER

HARRY DEMAREST)
KENNETH VINCENT) TRANSITMEN, (TEMPORARY) CIVIL WORKS)
EDWARD ELIASON)

Under special instructions dated December 15, 1933, which provided for the surveys included under Group No. 255, bearing the approval of the Commissioner of the General Land Office under date of February 2, 1934 and assignment instructions dated December 20, 1933.

Survey commenced January 23, 1934

Survey completed February 15, 1934

INDEX DIAGRAM.

Township 20 SOUTH, Range 9 WEST
 9 7 6 5 3

20 6 71	72 5 70	58 4 57	47 3 47	37 2 36	28 1
20 7 69	70 8 68	56 9 55	46 10 45	35 11 35	26 12
19 16 66	67 17 65	54 16 53	44 15 43	34 14 33	26 13
18 18 63	64 20 62	52 21 51	42 22 41	32 23 31	25 24
17 20 61	61 20 60	50 23 49	40 27 39	30 26 29	23 25
16 31 15	59 33 13	48 33 12	38 34 11	28 35 10	23 36

T.20 S., R.9 W.

6	5	4	3	2
7	8	9	10	11
18	17	16	15	14
19	20	21	22	23
30	29	28	27	26
31	32	33	34	35

Lines colored red were surveyed by Andrew Nelson,

U.S. Cadastral Engineer.

Lines colored orange were surveyed by Harry Demarest,

Transitman. (Temporary)

Lines colored black were surveyed by Kenneth Vincent,

Transitman. (Temporary)

Lines colored blue were surveyed by Edward Eliason,

Transitman. (Temporary)

Blank

Page

DESCRIPTION AND TEST OF INSTRUMENTS.

Survey commenced January 23, 1934; the boundaries were executed with Buff and Buff light mountain transit No. 16725, used by Andrew Nelson, U.S. Cadastral Engineer, and the subdivisional lines with Young and Sons light mountain transits Nos. 8539, 8589, and 8515, used by Harry Demarest, Kenneth Vincent, and Edward Eliason, temporary transitmen, C.W.A., respectively. Each instrument is equipped with Smith solar attachment and full vertical circle; the horizontal limb of each transit is provided with two double verniers, placed opposite to each other and reading to single minutes of arc, which is also the least count of the verniers of the latitude and declination arcs and vertical circles. These instruments were approved for use on this survey by the district cadastral engineer for Utah, conditional upon satisfactory field tests as stated in assignment instructions dated December 20, 1933.

The instruments were in good condition and adjustment at the time of this survey. The country over which the lines were extended being all open desert, the solar attachments were not used, and all azimuths in this record are referred to true meridians determined by observations made upon Polaris during the progress of the survey, by the method of deflection angles and calculated courses, and the lines were carried forward by double fore and back sights.

The data furnished with the special instructions gives the geographic position of the standard corner of T. 20 S., Rs. 8 and 9 W., approximate latitude $39^{\circ}01'5''N.$, and latitude $112^{\circ}48'W.$

January 24, 1934, at the corner of sections 23, 24, 25, and 26, T. 20 S., R. 9 W., in approximate latitude $39^{\circ}03'N.$, longitude $112^{\circ}49'W.$, at 9h 58m 08s a.m. by my watch, carries correct 105th meridian standard time as compared by a Western Union clock at Delta, Utah, December 23, 1934, and checked within three seconds by a meridian observation of the sun for apparent noon, this date, at the standard corner of sections 35 and 36, T. 20 S., R. 9 W., I make an hour angle observation on Polaris, east of the meridian, two each with the telescope in direct and reversed positions, reading the horizontal deflection angle from Polaris west to a flag pole about 40.00 chs. North, on line between sections 23 and 24.

Watch fast of local mean time - - - - -	31m 16s
Local mean time of observation - - - - -	9h 26.9m a.m.
Mean horizontal angle from Polaris to flag pole - - - - -	$1^{\circ}08.2'W.$
Azimuth of Polaris - - - - -	$1^{\circ}09.5'E.$
True bearing of flag pole - - - - -	$N.0^{\circ}01;3'E..$

January 24, 1934, at the standard corner of sections 35 and 36, T. 20 S., R. 9 W., in approximate latitude $39^{\circ}01.5'N.$, and longitude $112^{\circ}49'W.$, I make a meridian observation of the sun for time and latitude, observing simultaneously the altitude of the sun's lower limb and the transit of the sun's west limb, reversing the telescope and observing simultaneously the altitude of the sun's upper limb and the transit of the sun's east limb:

Mean observed altitude - - - - -	$31^{\circ}46'$
Reduced latitude - - - - -	$39^{\circ}02'N.$
Mean watch time of observation - - - - -	12h 43m 25s
Watch fast of local mean time - - - - -	31m 13s

Measurements

The measurements were made with Lallie steel ribbon tapes 5 and 8 chains in length; each tape is graduated

TOWNSHIP 20 S., R. 9 W.

Chains

every link for the first 100 links, and thereafter at intervals of 10 links. The tapes were tested by comparison with a Lufkin standard steel tape, 1 chain long, and found to be correct. The measurements were made on the slope, the vertical angles determined by large improved type clinometers in good adjustment; the field notes show the horizontal equivalents.

DEPENDENT RESURVEY OF NORTH BOUNDARY, T. 20 S., R. 9 W.

Reestablishment of surveys executed by G. O. Chaney,

U. S. Deputy Surveyor, in 1891.

Random lines.

From the corner of sections 1, 2, 35, and 36, on the north boundary of T. 20 S., R. 9 W., hereinafter described.

West, between secs. 2 and 35.

40.13 Fall 2 lks. S. of the $\frac{1}{4}$ sec. corner, hereinafter described

The course of this half mile therefore is N.89°58'W., and the distance is 40.13 chs.

From the $\frac{1}{4}$ sec. corner W., with continuous measurement.

80.26 Fall 7 lks. S. of the corner of secs. 2, 3, 34, and 35, hereinafter described.

The course of this half mile therefore is N.89°54'W. and the distance is 40.13 chs.

West, between secs. 3 and 34.

40.08 Fall 2 lks. S. of the $\frac{1}{4}$ sec. corner, hereinafter described

The course of this half mile therefore is N.89°58'W., and the distance is 40.08 chs.

From the $\frac{1}{4}$ sec. corner

West, with continuous measurement.

80.22 Fall 12 lks. S. of the corner of secs. 3, 4, 33, and 34, hereinafter described.

The course of this half mile therefore is N.89°50'W., and the distance is 40.14 chs.

West, between secs. 4 and 33.

40.04 Fall 6 lks. S. of the $\frac{1}{4}$ sec. corner, hereinafter described

The course of this half mile therefore is N.89°55'W., and the distance is 40.04 chs.

From the $\frac{1}{4}$ sec. corner

West, with continuous measurement.

80.11 Fall 5 lks. S. of the corner of secs. 4, 5, 32, and 33,

DEPENDENT RESURVEY OF NORTH BOUNDARY, T. 20 S., R. 9 W.

Chains

hereinafter described.

The course of this half mile therefore is N.89°56'W., and the distance is 40.07 chs.,

West, between secs. 5 and 32.

40.00 Find no trace of the $\frac{1}{4}$ sec. corner.

Continue W. on same line, with continuous measurement.

80.28 Fall 12 lks. S. of the corner of secs. 5, 6, 31, and 32, hereinafter described.

The course of this half mile therefore is N.89°55'W., and the proportionate distance for each half mile is 40.14 chs.,

West, between secs. 6 and 31.

40.13 Intersect the $\frac{1}{4}$ sec. corner, hereinafter described.

The course of this half mile therefore is west, and the distance is 40.13 chs.

From the $\frac{1}{4}$ sec. corner..

West, with continuous measurement.

83.27 Fall 2 lks. S. of the corner of Tps. 19 and 20 S., Rs. 9 and 10 W., hereinafter described.

The course of this half mile therefore is N.89°58'W., and the distance is 43.14 chs.

True lines.

The corner of secs. 1, 2, 35, and 36, Tps. 19 and 20 S., R. 9 W., is a quartzite stone, 18x8x4 ins., lying on the ground, marked with 6 notches on N. and S. edges, 5 notches on W. edge, and 1 notch on E. edge, and unwitnessed.

At corner point.

Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, with the original corner monument alongside, for corner of secs. 1, 2, 35, and 36, with brass cap mkd.

T19S	R9W
S35	S36
S2	S1
T20S	
1934	

dig pits

18x18x12 ins., in each section, 3 feet distant.

Thence

N.89°58'W., along the S. boundary of sec. 35.

DEPENDENT RESURVEY OF NORTH BOUNDARY, T. 20 S., R. 9 W.

Chains

Over nearly level land, through medium dense shadscale, undergrowth.

3.20 Old road bears S.20°W., and N.20°E.

40.13 On nearly level ground.

The $\frac{1}{4}$ sec. corner, which is a quartzite stone, 22x9x5 in. above ground, firmly set, dimly marked $\frac{1}{4}$ on N. face and unwitnessed.

At corner point.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, with the original corner monument alongside, for $\frac{1}{4}$ sec. corner, sec. 35 only, with brass cap marked

$\frac{1}{4}$ S 35

1934

of stone, 2 ft. base, $1\frac{1}{2}$ ft. high N. of cor. raise a mound

Thence

N.89°54'W., with continuous measurement.

43.20 Easting of 40.00 chs. from the closing corner of secs. 2 and 3, T. 20 S., R. 9 W.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. corner of sec. 2 only, with brass cap marked

$\frac{1}{4}$ S 2

1934

of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, S. of corner. raise a mound

80.26 On gentle NE. slope, 20 feet above $\frac{1}{4}$ sec. corner of sec. 35.

The corner of secs. 2, 3, 34, and 35, which is a quartzite stone, 18x8x5 ins., above ground, firmly set, marked with 6 grooves on N. and S. edges, 4 grooves on W. edge, and 2 grooves on E. edge, and unwitnessed.

At corner point.

Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, with the original corner monument alongside, for corner of secs. 34 and 35, only, with brass cap mkd.

T19S | R9W

S34 | S35

S2

T20S

1934

of stone, 3 ft. base, 2 ft. high, N. of corner. raise a mound

Land, nearly level, with gentle northeasterly exposure and drainage.

Soil, sandy gray clay, mixed with few small rocks; 2nd rate.

Undergrowth, medium dense shadscale.

DEPENDENT RESURVEY OF NORTH BOUNDARY, T. 20 S., R. 9 W.

Chains

Timber, none.

Fair winter grazing land.

N.89°58'W., along the S. boundary of sec. 34.

Ascend gradually over gentle NE. slope of slightly rolling land, through medium dense shadscale and scattered white sagebrush.

2.94 The closing corner of secs. 2 and 3, T. 20 S., R. 9 W., subsequently established at this point.

40.08 On nearly level land, the $\frac{1}{4}$ sec. corner, which is a quartzite stone, 10x8x8 ins., above ground, firmly set, marked $\frac{1}{4}$ on N. face, and unwitnessed.

At corner point.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, with the original corner monument alongside, for $\frac{1}{4}$ sec. corner, for sec. 34 only, with brass cap marked

$\frac{1}{4}$ S 34

1934

of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, N. of corner. raise a mound

Thence

N.89°50'W., with continuous measurement.

42.88 Midpoint between the closing corners of secs. 2 and 3, and 3 and 4, T. 20 S., R. 9 W.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. corner, for sec. 3 only, with brass cap marked

$\frac{1}{4}$ S 3

1934

of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, S. of corner. raise a mound

44.60 Wash, 10 lks. wide, 5 ft. deep, drains N.30°E.

47.90 Wash, 20 lks. wide, 3 ft. deep, drains N.20°E.

62.60 Wash, 20 lks. wide, 2 ft. deep, drains NE.

80.22 On gentle NE. slope, 23 ft. above $\frac{1}{4}$ sec. corner of sec. 34,

The corner of secs. 3, 4, 33, and 34, which is a quartzite stone, 20x16x6 ins., above the ground, firmly set, marked 3 notches on E, and 3 notches on W. edges, and unwitnessed.

At the corner point.

Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, with the original corner monument alongside, for corner of secs. 33 and 34, only, with brass cap mkd.

DEPENDENT RESURVEY OF NORTH BOUNDARY, T. 20 S., R. 9 W.

Chains

T19S | R9W
S33 | S34
 S3
 T20S
 1934

raise a mound
 of stone, 2 ft. base, 1½ ft. high, N. of corner.

Land, slightly rolling, with northeasterly exposure
 and drainage.

Soil, sandy clay, with scattered cobble rocks on surface;
 2nd rate.

Undergrowth, medium dense shadscale and white sagebrush.

Timber, none.

Fair winter grazing land.

N.89°55'W., along the S. boundary of sec. 33.

Ascend gradual NE. slope of gently rolling land, through
 medium dense shadscale and scattered white sagebrush.

2.60 The closing corner of secs. 3 and 4, T. 20 S., R. 9 W.,
 subsequently established at this point.

9.00 Old road, bears N.20°E. and S.20°W.

15.50 Wash, 5 lks. wide, 2 ft. deep, drains NE.

37.40 Old road, bears, S.50°E and N.50°W.

40.04 On gentle NE. slope, 46 ft. above corner of secs. 33
 and 34.

The ¼ sec. corner, which is a quartzite stone, 13x13x8
 ins., above ground, firmly set, marked ¼ on N. face, and
 unwitnessed.

At the corner point.

Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in
 the ground, with the original corner monument alongside,
 for ¼ sec. corner, for sec. 33, only. with brass cap mkd.

¼ S 33

1934

raise a mound
 of stone, 3½ ft. base, 2 ft. high, N. of corner.

Thence

N.89°56'W., with continuous measurement.

42.60 Midpoint between the closing corners of secs. 3 and 4,
 and 4 and 5, T. 20 S., R. 9 W.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in
 the ground, for ¼ sec. corner, for sec. 4 only, with
 brass cap marked

¼ S 4

1934

DEPENDENT RESURVEY OF NORTH BOUNDARY, T. 20 S., R. 9 W.

Chains

raise a mound of stone, 3 ft. base, 2 ft. high, S. of corner.

61.90 Old road, bears N.30°E. and S.30°W.

75.70 Old road at base of rolling hilly land, bears N.30°E., and S.30°W.; ascend abrupt SE. slope.

80.11 On steep rocky SE. slope, 170 feet above $\frac{1}{4}$ sec. corner, for sec. 33 only.

The corner of secs. 4, 5, 32, and 33, which is a quartzite stone, 18x9x7 ins., firmly set, marked 6 notches each on N. and S. edges, 4 notches on E. edge, and 2 notches on W. edges, and unwitnessed.

At the corner point.

Set an iron post, 3 ft. long, 2 ins. diam., 12 ins. in the ground, to solid rock, and in a mound of stone to top, with the original corner monument alongside, for cor. of secs. 32 and 33, only, with brass cap marked

T19S | R9W

S32 | S33

S4

T20S

1934

Land, E. 75.70 chs. is slightly rolling, with general northeasterly exposure and drainage; remainder of mile rolling hills, with general easterly exposure and drainage.

Soil, east 75.70 chs. is a deep, sandy clay, mixed with gravel; 2nd rate; remainder of mile shallow, sandy clay, mixed with rock and gravel; 4th rate.

Undergrowth, shadscale and white sagebrush.

Timber, none.

Fair winter grazing land.

N.89°55'W., along the S. boundary of sec. 32.

Ascend abrupt rocky SE. slope of rolling hilly land, through scattered shadscale undergrowth.

2.49 The closing corner of secs. 4 and 5, T. 20 S., R. 9 W., subsequently established at this point.

13.80 High ridge, 215 feet above sec. corner, bears N.20°E. and S.20°W., about 4 chs. distant; thence S.80°W. in low saddle for about 10 chs. thence southerly; descend gradual W. slope.

21.75 Slope changes from W. to NW.

33.40 Slope changes from NW. to SW.

40.14 Proportionate point on gradual SW. slope, 210 feet below ridge.

Set an iron post, 3 ft. long, 1 in. diam., over chiseled

DEPENDENT RESURVEY OF NORTH BOUNDARY, T19S., R. 9 W.

Chains

X on solid exposed surface rock, and in a mound of stone, 6 feet base to top of post, for restored $\frac{1}{4}$ section corner for sec. 32, only, with brass cap marked

$\frac{1}{4}$ S 32

1934

42.50 Midpoint between the closing corner of secs. 4 and 5, and secs. 5 and 6.

Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground to solid rock, and in a mound of stone to top, for $\frac{1}{4}$ sec. corner, for sec. 5, only, with brass cap marked

$\frac{1}{4}$ S 5

1934

Deposit a quartzite stone, 10x8x8 ins., at base of post, marked with a X

45.80 Top of a conglomerate ledge facing W., 20 feet high, bears N. and S.20°E.

51.00 Base of rolling hills, bears S. and N.20°E., thence descend gentle W. slope.

56.86 Old road, bears N. and S. along base of hills.

75.65 Wash, 10 lks. wide, 1 ft. deep, drains NW.

80.28 On gentle W. slope, 280 feet below $\frac{1}{4}$ sec. corner, for sec. 32, only.

The corner of secs. 5, 6, 31, and 32, which is a quartzite stone, 18x12x4 ins., firmly set, marked with 5 notches on E., and 1 notch on W. edge, and unwitnessed.

At corner point.

Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, with the original corner monument alongside, for corner of secs. 31 and 32, only, with brass cap mkd.

T19S | R9W

S31 | S32

S5

T20S

1934

of stone, 3 ft. base, 2 ft. high, N. of corner. raise a mound

Land, east 51.00 chains, rolling hills, with easterly and westerly exposure and drainage; remainder of mile, slightly rolling, with general westerly exposure and drainage.

Soil, hilly land, shallow sandy clay, mixed with rock and gravel, 4th rate; remainder of mile, deep sandy clay, with scattered small rock on surface, 2nd rate.

Undergrowth, scattered shadscale.

Timber, none.

Fair winter grazing land.

DEPENDENT RESURVEY OF NORTH BOUNDARY, T. 20 S., R. 9 W.

Chains

West, along the S. boundary of sec. 31.

Over slightly rolling land, through medium dense shade and scattered white sagebrush.

2.23 The closing corner of secs. 5 and 6, T. 20 S., R. 9 W., subsequently established at this point.

40.13 On nearly level land.

The $\frac{1}{4}$ sec. corner, which is a quartzite stone, 20x10x9 ins., firmly set, marked $\frac{1}{4}$ on N. face, and unwitnessed.

At the corner point.

Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, with the original corner monument alongside, for $\frac{1}{4}$ sec. corner, for section 31 only, with brass cap marked

$\frac{1}{4}$ S 31

1934

of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, N. of corner. raise a mound

Thence

N.89°58'W., with continuous measurement.

42.23 Westing of 40.00 chs. from the closing corner of secs. 5 and 6, T. 20 S., R. 9 W.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. corner, for sec. 6 only, with brass cap marked

$\frac{1}{4}$ S 6

1934

of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, S. of corner. raise a mound

47.50 Wash, 4 lks. wide, 1 ft. deep, drains NE. about 2 chains distant, thence NW.

64.15 Wash, 5 lks. wide, 2 ft. deep, drains NW.

76.00 Enter sandy flat, bears NE. and SW.

83.27 On nearly level sandy land.

The original corner of Tps. 19 and 20 S., Rs. 9 and 10 W., which is a quartzite stone, 18x8x8 ins., firmly set, marked 6 notches on north, south, east and west edges, and unwitnessed.

At the corner point.

Set an iron post, 3 ft. long, 3 ins. diam., 30 ins. in the ground, with the original corner monument alongside, for the corner of Tps. 19 and 20 S., Rs. 9 and 10 W., with brass cap marked

T19S

R10W | R9W

S36 | S31

S1 | S6

R10W | R9W

T20S

1934

DEPENDENT RESURVEY OF NORTH BOUNDARY, T. 20 S., R. 9 W.

Chains

of stone, 4-ft. base, 2½ ft. high, S. of corner. raise a mound

Land, nearly level, with general northwesterly exposure and drainage.

Soil, deep sandy clay, with scattered small rock on surface; 2nd rate.

Undergrowth, shadscale and white sagebrush.

Timber, none.

Fair winter grazing land.

INDEPENDENT RESURVEY OF PORTION OF THE 4TH STANDARD
PARALLEL SOUTH, THROUGH RANGE 9 WEST.

Independent resurvey, superseding the survey
executed by G. O. Chaney, U. S. Deputy
Surveyor, in 1891.

True lines

The standard corner of secs. 35 and 36, on the S. boundary of T. 20 S., R. 9 W., is a quartzite stone, 12x8x6 ins., firmly set, marked 5 notches on W. edge, and 1 notch on E. edge, and unwitnessed.

At corner point.

Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, with the original corner monument alongside, for standard corner of secs. 35 and 36, with brass cap marked

S C
T20S R9W
S35 S36

1934

of stone, 2 ft. base, 1½ ft. high, N. of corner. raise a mound

Thence

West, along the S. boundary of sec. 35, T. 20 S., R. 9 W. on a transit line describing a tangent to the parallel.

Over nearly level land, through undergrowth of medium dense shadscale.

34.20 Old road, bears N.15°E. and S.15°W.

38.20 Old road, bears N.35°E. and SW.

40.00 On nearly level land.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for standard ¼ sec. corner, with brass cap marked

SC
¼ S35

1934

18x18x12 ins., E. and W. of post, 3 ft. distant. dig pits

INDEPENDENT RESURVEY OF PORTION OF THE FOURTH STANDARD
PARALLEL SOUTH, THROUGH RANGE 9 WEST.

Chains

From this corner the original standard $\frac{1}{4}$ sec. corner of sec. 35, which is a quartzite stone, 16x9x8 ins., firmly set, marked $\frac{1}{4}$ on N. face, and unwitnessed, bears S.45°W., 4 lks. distant, I deposit this corner monument alongside of iron post.

80.00 North 1 link from the tangent.

On gently rolling E. slope, 55 feet above $\frac{1}{4}$ sec. cor.

Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, for standard corner of secs. 34 and 35, with brass cap marked

S C
T20S | R9W
S34 | S35
1934

raise a mound of stone, 3 feet base, 2 feet high, N. of corner.

From this corner the original standard corner of secs. 34 and 35, which is a quartzite stone, 18x7x7 ins., firmly set, marked SC on SW. face, 4 notches on W. edge, and 2 notches on E. edge, and unwitnessed, bears S.45°W., 7 links distant, I deposit this corner monument alongside of the iron post.

Land, slightly rolling, with general easterly exposure and drainage.

Soil, sandy loam, with scattered patches of small pebbles on surface; 2nd rate.

Undergrowth, medium dense shadscale.

Timber, none.

Fair winter grazing land.

West, along the S. boundary of sec. 34, on a transit line describing the tangent, which starts at a point 1 link S. of the standard corner of secs. 34 and 35, and bears S. 89°58.6'W.

Over gently rolling land, through medium dense shadscale undergrowth.

21.00 Wash, 10 links wide, 3 feet deep, drains NE. about 2 chs. distant, thence E.

30.70 Old road, bears NE. and SW.

40.00 N. 2 links from the tangent, on gentle E. slope, 25 feet above standard corner of secs. 34 and 35.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for standard $\frac{1}{4}$ sec. corner, with brass cap marked

SC
 $\frac{1}{4}$ S34

1934

raise a mound of stone, 3 foot base, 2 $\frac{1}{2}$ feet high, N. of corner.

From this corner the original standard $\frac{1}{4}$ sec. corner,

INDEPENDENT RESURVEY OF PORTION OF THE FOURTH STANDARD
 AND PARALLEL SOUTH, THROUGH RANGE 9 WEST.

Chains

which is a quartzite stone, 15x12x3 ins., firmly set, marked $\frac{1}{2}$ on N. face, and unwitnessed, bears S.45°W., 10 links distant, I remove this corner monument and deposit same alongside of iron post.

- 52.60 Old road, bears N.20°E., and S.20°W.
- 54.70 Base of hills, bears N. and S.; ascend abrupt rocky E. slope.
- 73.75 Top of rocky ridge, 420 feet above $\frac{1}{2}$ sec. corner, bears S.20°W. and N.; descend abrupt rocky W. slope.
- 80.00 North 3 links from the tangent, on steep W. slope, 130 feet below ridge.

Set an iron post, 3 feet long, 2 ins. diam., 2 ins. in the ground, to bed rock, and in a mound of stone, 6 feet base, to top of post, for standard corner of secs. 33 and 34, with brass cap marked

S C
 T20S | R9W
S33 | S34
 1934

Deposit quartzite stone, 10x9x3 ins., at base of post, marked with a X.

No trace of the original standard corner of secs. 33 and 34 could be found.

Land, E. 54.70 chs. is slightly rolling, with general easterly exposure and drainage; remainder of mile is broken hilly land, with general easterly and westerly exposure and drainage.

Soil, east 54.70 chs. is deep, sandy loam, mixed with scattered small rock; 2nd rate; remainder of mile is shallow, sandy loam, mixed with rock and gravel; 4th rate.

Undergrowth, medium dense shadscale.

No timber.

Fair winter grazing land.

West, along the S. boundary of sec. 53, on a transit line describing the tangent, which starts at a point $\frac{3}{4}$ links S. of the standard corner of secs. 33 and 34, and bears S.89°57.9'W.

Descend abrupt W. slope of rolling hilly land, through medium dense shadscale and sagebrush.

- 6.65 Wash, 30 links wide, 3 feet deep; in draw, 120 feet below sec. corner, drains SE.; road in bottom of draw, bears SE. and NW.; ascend gradual rolling E. slope.
- 25.50 Slope changes from E. to rolling general N. slope.
- 31.50 Small draw, 20 feet deep, drains N.60°E.
- 38.50 Low spur, 100 feet above draw, projects NE.; descend gradual W. slope.

INDEPENDENT RESURVEY OF PORTION OF THE FOURTH STANDARD
PARALLEL SOUTH, THROUGH RANGE 9 WEST.

Chains

40.00 North 5 links from the tangent.

In bottom of small draw, 15 feet below spur, drains NE.

Set an iron post, 3 ft. long, 1 in. diam., 4 ins. in the ground, to solid rock, and in a mound of stone to top, for standard $\frac{1}{4}$ sec. corner, with brass cap marked.

SC
 $\frac{1}{4}$ S33

1934

From this corner the original standard $\frac{1}{4}$ sec. corner, which is a quartzite stone, 13x10x9 ins., firmly set, in a small mound of stone, marked $\frac{1}{4}$ on N. face, and unwitnessed, bears S.82°32'W. 85 links distant. I remove this corner and deposit same alongside of iron post.

Ascend gradual rolling NE. slope.

49.05 Small draw, 20 feet deep, drains N.70°E.; thence ascend gradual rocky SE. slope.

67.80 Main ridge, 245 feet above standard $\frac{1}{4}$ sec. corner, bears N. and S. about 5 chains distant to bottom of saddle; descend abrupt SW. slope.

77.65 Small draw, 30 feet deep, drains S.60°W.

80.00 North 7 lks. from the tangent.

On steep SW. slope, 100 feet below ridge.

Set an iron post, 3 ft. long, 2 ins. diam., 8 ins. in the ground, to solid rock, and in a mound of stone, 6 ft. base to top, for the standard corner of secs. 32 and 33, with brass cap marked

S C
T20S | R9W
S32 | S33

1934

From this corner the original standard corner of secs. 32 and 33, which is a quartzite stone, 17x8x6 ins., loosely set, marked with 4 notches on E. edge, and 2 notches on W. edge, and unwitnessed, bears S.86°35'W., 222 links distant. I remove this corner and deposit same alongside of iron post.

Land, rolling hills; east 67.80 chains with northeasterly exposure and drainage; remainder of mile with general southwesterly exposure and drainage.

Soil, shallow sandy clay, mixed with rock and gravel; 4th rate.

Undergrowth, medium dense shadscale and sagebrush.

Timber, none.

Fair winter grazing land.

West, along the S. boundary of sec. 32, on a transit line describing the tangent, which starts at a point 7 links

INDEPENDENT RESURVEY OF PORTION OF THE FOURTH STANDARD
PARALLEL SOUTH, THROUGH RANGE 9 WEST.

Chains

S. of the standard corner of secs. 32 and 33, and which bears S.89°57.2'W.

Descend abrupt SW. slope of rolling hilly land, through medium dense shadscale undergrowth.

16.00 Base of hills, bears N.20°W. and S.20°E.; thence descend gradual W. slope of rolling valley land.

40.00 North, 10 links from the tangent, on gradual W. slope, 155 feet below standard corner of secs. 32 and 33.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for standard $\frac{1}{4}$ sec. corner, with brass cap marked.

SC
 $\frac{1}{4}$ S 32

1934

18x18x12 ins., E. and W. of post, 3 feet distant. dig pits

From this corner the original standard $\frac{1}{4}$ sec. corner, which is a quartzite stone, 16x12x4 ins., lying on the ground, marked $\frac{1}{4}$ on one face, and unwitnessed, bears S. 86°W. 221 links distant. I remove this corner and deposit same alongside of iron post.

57.00 Enter medium dense sagebrush, bears N. and S.

61.00 Leave sagebrush, bears N. and S.; thence through medium dense shadscale.

71.50 Old road, bears N.15°W. and S.15°E.

75.10 Wash, 5 links wide, 2 feet deep, drains SE. in general bottom of wide valley, 15 feet below standard $\frac{1}{4}$ sec. cor.

80.00 North 13 links from the tangent; on nearly level land.

Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for standard corner of secs. 31 and 32, with brass cap marked

SC
T20S | R9W
S31 | S32
1934

of stone, 3 feet base, 2 feet high, N. of corner. raise a mound

From this corner the original standard corner of secs. 31 and 32, which is a quartzite stone, 16x12x8 ins., firmly set, marked with 1 notch on W. and 5 notches on E. edge, and unwitnessed, bears S.86°W, 226 links distant. I remove this corner and deposit same alongside of the iron post.

Land, E. 16.00 chains, rolling hills, with general south-westerly exposure and drainage; remainder of mile gently rolling.

Soil, shallow sandy loam, with rock on surface; 4th rate; and deep sandy loam, 2nd rate.

Undergrowth, shadscale and sagebrush.

No timber.

Fair winter grazing land.

INDEPENDENT RESURVEY OF PORTION OF THE FOURTH STANDARD
PARALLEL SOUTH, THROUGH RANGE 9 WEST.

Chains

West, along the S. boundary of sec. 31, on a transit line describing the tangent, which starts at a point 13 links S. of the standard corner of secs. 31 and 32, and bears S. 89° 56.5' W.

Gradually ascend over gentle E. slope of wide valley, through medium dense shadscale undergrowth.

16.50 Old road, bears N. 20° W. and S. 20° E.

40.00 North 17 links from the tangent; on gentle E. slope, 85 feet above the standard corner of secs. 31 and 32.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for standard $\frac{1}{4}$ sec. corner, with brass cap marked

SC
 $\frac{1}{4}$ S31

1934

raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, N. of corner.

From this corner the original standard $\frac{1}{4}$ sec. corner, which is a quartzite stone, 10x6x6 ins., firmly set, in a small mound of stone, dimly marked $\frac{1}{4}$ on N. face, and unwitnessed, bears S. 86° 30' W., 223 links distant. I remove this corner and deposit same alongside of the iron post.

45.30 Wash, 5 links wide, 1 ft. deep, drains N. 60° E.

64.00 Wash, 10 links wide, 5 ft. deep, drains N. 40° E.; gradually ascend over gently rolling NE. slope through medium dense sagebrush undergrowth.

80.00 North 20 $\frac{1}{2}$ links from the tangent; on gentle NE. slope, 140 feet above the standard $\frac{1}{4}$ sec. corner, and at base of a high mountain bearing N. 20° E. and S. 20° W.

Set an iron post, 3 ft. long, 3 ins. diam., 28 ins. in the ground, for standard corner of township 20 south, ranges 9 and 10 west, with brass cap marked

SC
T20S
R10W | R9W
S36 | S31

1934

raise a mound of stone, 5 ft. base, 3 $\frac{1}{2}$ ft. high, N. of corner.

From this corner, the original corner of Tp. 20 S., Rs. 9 and 10 W., which is a quartzite stone, 32x8x7 ins., firmly set in a small mound of stone, marked with 6 notches on N., E., and W., edges, and unwitnessed, bears S. 86° 30' W., 226 links distant. I remove this corner and place same alongside the iron post.

Land, slightly rolling with general northeasterly exposure and drainage.

Soil, deep sandy loam, mixed with scattered rock; 2nd rate.

Undergrowth, shadscale and sagebrush.

No timber.

Fair winter grazing land.

SURVEY OF THE WEST BOUNDARY, T. 20 S., R. 9 W.

Chains

From the standard corner of T. 20 S., Rs. 9 and 10 W., heretofore described.

North, on a random line, setting temp. $\frac{1}{4}$ sec. and sec. corners along the line between Tp. 20 S., Rs. 9 and 10 W. At 484.56 chains fall 1.55 chains E. of the corner of Tps. 19 and 20 S., Rs. 9 and 10 W., heretofore described. Therefore, the correction is 25.6 links W. per mile counting from the point of beginning.

Thence

From the standard corner of Tp. 20 S., Rs. 9 and 10 W., N.0°11'W., on true line, between secs. 31 and 36.

Gradually ascend steep rocky general E. slope over mountainous land, through scattered shadscale and sagebrush.

- 0.20 Old road, bears NE. and SW.
- 29.90 Enter rough broken land, bears N.20°E. and S.20°W.; thence over quartzite outcroppings and small ledges.
- 40.00 On steep east slope, 245 feet above Tp. corner.

Set an iron post, 3 ft. long, 1 in. diam., 8 ins. in the ground, to solid rock, and in a mound of stone, to top, for $\frac{1}{4}$ sec. corner, with brass cap marked

	$\frac{1}{4}$	
S36	S31	
	1934	

Deposit quartzite stone, 12x10x8 ins., at base of post, marked with a X.

- 55.60 Small draw, 20 feet deep, drains E.; ascend gradually along steep E. slope.
- 69.80 Small draw, 30 feet deep, drains E.
- 80.00 On steep broken general E. slope, 230 feet above $\frac{1}{4}$ sec. corner, at top of ascent bears E. and W.

Set an iron post, 3 feet long, 2 ins. diam., 10 ins. in the ground to solid rock, and in a mound of stone to top, for corner of secs. 25, 30, 31, and 36, with brass cap marked

	T20S		
R10W	R9W		
S25	S30		
S36	S31		
	1934		

Deposit quartzite stone, 10x8x8 ins.; at base of post, marked with a X.

Land, broken and rocky and mountainous, with general easterly exposure and drainage.

Soil, shallow sandy loam, mixed with rock and gravel; 4th rate.

Undergrowth, shadscale and sagebrush.

Timber, none.

Fair grazing land.

SURVEY OF WEST BOUNDARY, T. 20 S., R. 9 W.

Chains

N.0°11'W., between secs. 25 and 30.

Descend abrupt rocky NE. slope of broken mountainous land of quartzite outcroppings and small ledges, through scattered sagebrush undergrowth.

4.00 Steep draw, 130 feet below section corner, drains E.; ascend steep broken SE. slope.

22.40 Top of steep ridge, 320 feet above draw, bears E. and W.; descend abrupt broken NE. slope.

31.40 Draw, 190 feet below ridge, heads N.80°W., about 4 chains distant, and drains S.80°E.; ascend rocky steep SW, slope.

40.00 On steep broken SW. slope, 235 feet, above draw.

Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground to solid rock, and in a mound of stone to top, for $\frac{1}{4}$ sec. corner, with brass cap marked

S25 | S30

1934

raise a mound of stone, 3 ft. base, 2 ft. high, W. of corner.

47.30 Spur, 115 feet above $\frac{1}{4}$ sec. corner, projects SE., and bears NW. about 3 chains to divide ridge; descend gradual broken N. slope.

58.80 Divide ridge, 35 feet below spur, bears northerly about 3.50 chains distant, thence N.30°E., and S.20°W.; descend gradually along steep W. slope, near top of ridge.

74.10 Bend in same divide ridge, 10 feet below last crossing, bears N.20°E. and S.20°E.; descend gradually along steep broken W. slope, near top of ridge.

80.00 On steep broken rocky W. slope, 65 feet below bend in ridge.

Set an iron post, 3 feet long, 2 ins. diam., 20 ins. in the ground to solid rock, and in a mound of stone to top, for corner of secs. 19, 24, 25, and 30, with brass cap marked

T20S

R10W	R9W
S24	S19
S25	S30

1934

raise a mound of stone, 3 ft. base, 2 ft. high, W. of corner.

Land, broken and mountainous, with general easterly and westerly exposure and drainage.

Soil, shallow sandy loam, mixed with rock and gravel; 4th rate.

Undergrowth, sagebrush and grass.

Timber, none.

Fair winter grazing land.

SURVEY OF THE WEST BOUNDARY, T. 20 S., R. 9 W.

Chains

N.0°11'W., between secs. 19 and 24.

Ascend gradually over steep broken rocky W. slope of broken mountainous land, through scattered shadscale and sagebrush.

- 7.10 Bend in divide ridge, 15 feet above sec. corner, bears N.20°E and S.20°E.; descend abrupt broken NW. slope.
- 19.60 Draw, 175 feet below divide, heads E. about 2.50 chains distant, and drains W.; ascend gradually over steep SW. slope.
- 25.00 Top of same divide ridge, 20 feet above draw, bears SE. and N.15°E. about 8 chains distant, thence NW.; also spur, projects N.80°W.; descend gradually along broken W. slope.
- 35.50 Bend in same divide ridge, 70 feet below last crossing, bears SE. and N.20°E.; descend abrupt broken NW. slope.
- 40.00 On steep NW. slope, 105 feet below divide, near bottom of head of draw.
Set an iron post, 3 ft. long, 1 in. diam., 8 ins. in the ground, to solid rock, and in a mound of stone to top, for $\frac{1}{4}$ sec. corner, with brass cap marked

\uparrow
 S24 | S19
 1934

Deposit quartzite stone, 8x8x6 ins., at base of post, marked X.

- 40.20 Head of draw, drains N.70°W.; ascend gradually over broken W. slope.
- 44.60 Spur, 15 feet above $\frac{1}{4}$ sec. corner, projects N.60°W., and bears S.60°E., about 3 chains distant to N. point of divide ridge. From N. point of divide ridge a deep saddle bears N.70°E., about 8 chains distant, connecting a high ridge about 25 chains E.; descend abrupt rocky N. slope.
- 52.30 Draw, near head, 260 feet below spur, drains N.80°W.; ascend abrupt rocky S. slope.
- 62.50 Spur, 50 feet above draw, projects S.85°W.; descend abrupt NW. slope.
- 70.60 Spur, projects and descends NW.; continue abrupt descent over NE. slope.
- 80.00 On steep NE. slope, 440 feet below spur.

Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground to solid rock, and in a mound of stone to top, for corner of secs. 13, 18, 19, and 24, with brass cap marked

T20S
 R10W | R9W
313 | 318
 S24 | S19
 1934

of stone, 4 ft. base, 3 ft. high, W. of corner. raise a mound

SURVEY OF WEST BOUNDARY, T. 20 S., R. 9 W.

Chains

Land, broken and mountainous, with general westerly exposure and drainage.

Soil, shallow sandy loam, mixed with rock and gravel; 4th rate.

Undergrowth, shadscale and sagebrush.

Timber, none.

Fair grazing land.

N.0°11'W., between secs. 13 and 18.

Descend gradually over rolling NE. slope of rolling mountainous land, through medium dense shadscale and sagebrush.

2.90 Bend, in bottom of draw, 35 feet deep, from SE. drains NE.; descend along general E. slope.

13.30 Bottom of same draw, 45 feet below sec. corner, drains NW.; descend gradually along rolling NW. slope.

27.50 Old road, at base of mountains, bears N.30°E. and S.30°W.; continue descent over rolling NW. slope.

40.00 On gradual NW. slope, 225 feet below sec. corner.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{2}$ sec. corner, with brass cap marked

↑
S13 | S18
1934

raise a mound
of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of corner.

66.60 Wash, 10 links wide, 3 feet deep, drains NW.

77.40 Old road, bears N.30°E. and S.30°W.

80.00 On gradual NW. slope, 125 feet below $\frac{1}{2}$ sec. corner.

Set an iron post, 3 ft. long, 2 ins. diam., 26 ins. in the ground, for corner of secs. 7, 12, 13, and 18, with brass cap marked

T20S
R10W | R9W
S12 | S7

S13 | S18
1934

raise a mound
of stone, 3 ft. base, 2 ft. high, W. of corner.

Land, S.27.50 chains rolling and mountainous; remainder of mile, rolling desert land, general northwesterly exposure and drainage.

Soil, shallow sandy loam mixed with rock and gravel; 4th rate, on S. 27.50 chains; remainder of mile, deep sandy loam, mixed with rock and gravel; 3rd rate.

Undergrowth, shadscale and sagebrush.

SURVEY OF THE WEST BOUNDARY, T. 80 S., R. 9 W.

Chains

chains

Timber, none.
Fair grazing land.

N.0°11'W., between secs. 7 and 12.

Descend gradual rolling NW. slope of rolling land, through medium dense shadscale and sagebrush.

37.50 Main wash, 12 links wide, 5 feet deep, in small draw, 20 feet deep, drains N.30°W.

40.00 On gradual NW. slope, 100 feet below sec. corner.

Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground, to solid rock, and in a mound of stone, to top, for $\frac{1}{4}$ sec. corner, with brass cap marked

$\frac{1}{4}$
 S12 | S7
 1934

of stone, 3 ft. base, 2 $\frac{1}{2}$ ft. high, W. of corner. raise a mound

50.60 Wash, 20 links wide, 8 feet deep, drains NW.

80.00 On gentle NW. slope, 55 feet below $\frac{1}{4}$ sec. corner.

Set an iron post, 3 ft. long, 2 ins. diam., 26 ins. in the ground, for corner of secs. 1, 6, 7, and 12, with brass cap marked

T20S
 R10W | R9W
 S1 | S6
 S12 | S7
 1934

of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of corner. raise a mound

From this corner a quartzite stone, 18x9x8 ins., firmly set, marked 6 notches on W., and 5 notches on S. edge, and unwitnessed, bears N.62 links distant. I remove this stone and deposit same alongside of the iron post. This stone is an unofficial corner monument, of which there is no record.

Land, rolling desert, with general northwesterly exposure and drainage.

Soil, deep sandy loam, mixed with gravel; 3rd rate.

Undergrowth, shadscale and sagebrush.

No timber.

Fair winter grazing land.

N.0°11'W., between secs. 1 and 6.

Descend gradual NW. slope of rolling desert land, through medium dense shadscale and scattered white sagebrush.

28.30 Wash, 4 links wide, 2 feet deep, drains N.85°W.

SURVEY OF THE WEST BOUNDARY, T. 20 S., R. 9 W.

Chains
40.00

On nearly level land, 50 feet below sec. corner.
Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. corner, with brass cap marked

$\frac{1}{4}$
S1/S6
1934

raise a mound of stone, $2\frac{1}{2}$ ft. base, 2 ft. high, W. of corner.

From this corner a quartzite stone, 24x14x2 ins., firmly set, plainly marked $\frac{1}{4}$ on W. face, and unwitnessed, bears N. 60 links distant, I remove this stone and deposit same alongside of the iron post. This stone is an unofficial corner monument of which there is no record.

72.00

Enter sandy flat, bears NE. and SW.

84.56

The corner of Tps. 19 and 20 S., Rs. 9 and 10 W., heretofore described, 30 feet below $\frac{1}{4}$ sec. corner.

Land, rolling desert.

Soil, sandy loam and gravelly, 2nd rate.

Undergrowth, shadscale and sagebrush.

No timber.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISION OF
T. 20 S., R. 9 W.

Reestablishment of survey executed by G. O. Chaney,
U. S. Deputy Surveyor, in 1891.

Random Lines

From the standard corner of secs. 35 and 36, on the S. boundary of T. 20 S., R. 9 W., heretofore described.

North, between secs. 35 and 36.

40.01

Fall $3\frac{1}{2}$ lks. E. of the $\frac{1}{4}$ sec. cor., hereinafter described.

The course of this half mile therefore is N.0°03'W., and the distance is 40.01 chains.

From the $\frac{1}{4}$ sec. cor., north, with continuous measurement.

80.01

Fall $3\frac{1}{2}$ lks. E. of the cor. of secs. 25, 26, 35, and 36, hereinafter described.

The course of this half mile therefore is N.0°03'W., and the distance is 40.00 chains.

North, between secs. 25 and 26.

40.02

Fall 1 lk. E. of the $\frac{1}{4}$ sec. cor., hereinafter described.

The course of this half mile therefore is N.0°01'W., and the distance is 40.02 chains.

From the $\frac{1}{4}$ sec. cor., north, with continuous measurement.

80.04

Fall 1 lk. E. of the cor. of secs. 23, 24, 25, and 26, hereinafter described.

The course of this half mile therefore is N.0°01'W., and the distance is 40.02 chains.

North, between secs. 23 and 24.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISION OF
T. 20 S., R. 9 W.

Chains	<p>40.01 Fall 1 lk. W. of $\frac{1}{2}$ sec. cor. hereinafter described. The course of this half mile therefore is N.0°01'E., and the distance is 40.01 chains. From the $\frac{1}{2}$ sec. cor., north, with continuous measurement.</p> <p>80.01 Fall 2 lks. W. of the cor. of secs. 13, 14, 23, and 24, hereinafter described. The course of this half mile therefore is N.0°02'E., and the distance is 40.00 chains.</p> <hr/> <p>40.01 Fall 2 lks. W. of the $\frac{1}{2}$ sec. cor. hereinafter described. The course of this half mile therefore is N.0°02'E., and the distance is 40.01 chains. From the $\frac{1}{2}$ sec. cor., north, with continuous measurement.</p> <p>80.02 Fall 1 lk. W. of the corner of secs. 11, 12, 13, and 14, hereinafter described. The course of this half mile therefore is N.0°01'E., and the distance is 40.01 chains.</p> <hr/> <p>40.00 Fall 1 lk. W. of the $\frac{1}{2}$ sec. cor. hereinafter described. The course of this half mile therefore is N.0°01'E.; and the distance is 40.00 chains. From the $\frac{1}{2}$ sec. cor., north, with continuous measurement.</p> <p>80.04 Fall 2 lks. W. of the cor. of secs. 1, 2, 11, and 12, hereinafter described. The course of this half mile therefore is N.0°02'E., and the distance is 40.04 chains.</p> <hr/> <p>40.12 N.2°15'E., between secs. 1 and 2, for signal at the $\frac{1}{2}$ sec. corner. The $\frac{1}{2}$ sec. corner hereinafter described. The course of this half mile therefore is N.2°15'E., and the distance is 40.12 chains. From the $\frac{1}{2}$ sec. cor., N.2°05'E., with continuous measurement for signal at the cor. of secs. 1, 2, 35, and 36.</p> <p>84.15 The corner of secs. 1, 2, 35, and 36, on the N. boundary of T. 20 S., R. 9 W., heretofore described. The course of this half mile therefore is N.2°05'E., and the distance is 44.03 chains.</p>
--------	---

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISION OF
T. 20 S., R. 9 W.

Chains

True Lines

From the standard corner of secs. 35 and 36, on the S. boundary of T. 20 S., R. 9 W., heretofore described.

N0°03'W., between secs. 35 and 36.

Over nearly level land, through medium dense shadscale undergrowth.

40.01 Intersect the $\frac{1}{4}$ sec. corner, which is a quartzite stone, 16x12x8 ins., firmly set, marked $\frac{1}{4}$ on W. face, and unwitnessed.

At the corner point.

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, with the original corner monument alongside, for $\frac{1}{4}$ sec. corner, with brass cap marked

$\frac{1}{4}$
S35 | S36
1934

of stone, 2 ft. base, 2 $\frac{1}{2}$ ft. high, W. of corner. raise a mound

47.50 Old road, bears N.60°E., and S.60°W.

53.10 Old road, bears NW. and SE., about 3 chains distant, thence S.

71.00 Top of sandy rise, about 10 feet high, bears N.35°E., and S.20°W.

80.01 On nearly level land, 25 feet above $\frac{1}{4}$ sec. corner, the corner of secs. 25, 26, 35, and 36, which is a quartzite stone, 19x10x5 ins., firmly set, marked with 1 notch on E., and 1 notch on S. edge, and unwitnessed.

At the corner point.

Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, with the original corner monument alongside, for corner of secs. 25, 26, 35, and 36, with brass cap marked

T20S | R9W
S26 | S25
S35 | S36
1934

of stone, 3 ft. base, 2 ft. high, W. of corner. raise a mound

Land, slightly rolling, with general southeasterly exposure and drainage.

Soil, deep sandy loam, with scattered patches of small rocks on surface; 2nd rate.

Undergrowth, medium dense shadscale.

No timber.

Fair winter grazing land.

N.0°01'W., between secs. 25 and 26.

**DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISION OF
T. 20 S.; R. 9 W.**

Chains

Ascend gradual SE. slope, of slightly rolling land, through medium dense shadscale undergrowth.

- 22.60 Old road, at base of rolling hills, bears N.50°E. and S.50°W.; ascend gradual SE. slope.
- 32.60 Top of S. rim of hill, 120 feet above sec. corner, bears S.60°W. and N.60°E.; descend gradually along gentle E. slope of hill.
- 40.02 On gentle E. slope, level with rim of hill.

The $\frac{1}{4}$ sec. corner, which is a quartzite stone, 15x8x5 ins., firmly set and deeply embedded in a mound of stone, unmarked and unwitnessed. I take this stone to be the original corner monument.

At the corner point.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with the original corner monument alongside for $\frac{1}{4}$ sec. corner, with brass cap marked

$\frac{1}{4}$
S26 | S25
1934

of stone, 3 $\frac{1}{2}$ ft. base, 3 ft. high, W. of corner. raise a mound.

- 46.90 North rim of hill, bears E. and W; descend gradual N. slope.
- 80.04 On gradual N. slope, 120 feet below $\frac{1}{4}$ sec. corner.

The corner of secs. 23, 24, 25, and 26, which is a quartzite stone, 15x10x9 ins., loosely set, marked 2 notches on S., and 1 notch on E. edge, and unwitnessed.

At the corner point.

Set an iron post, 3 ft. long, 2 ins. diam., 18 ins. in the ground, to solid rock, and in a mound of stone to top, with the original corner monument alongside, for corner of secs. 23, 24, 25, and 26, with brass cap marked

T20S | R9W
S23 | S24

S26 | S25
1934

of stone, 3 ft. base, 3 ft. high, W. of corner. raise a mound

Land, S. 22.60 chs. slightly rolling; remainder of mile, rolling hilly land, with general easterly exposure and drainage.

Soil, deep sandy loam, 2nd rate; also shallow sandy loam, with small rocks on surface on hilly land; 3rd rate.

Undergrowth, shadscale and grass.

No timber.

Fair winter grazing land.

TO RECONSTRUCT AN INDEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISION OF
T. 20 S., R. 9 W.

Chains

N.0°01'E., between secs. 23 and 24.

Descend gradual N. slope of rolling hilly land, through medium dense shadscale and grass.

8.00 Base of hills, bears S.80°E. and N.80°W.; thence descend slightly rolling NE. slope.

25.00 Old road, bears N.60°W. and S.60°E.

40.01 On gentle NE. slope, 55 feet below sec. corner.

The $\frac{1}{4}$ sec. corner, which is a quartzite stone, 20x9x6 ins., firmly set, dimly marked $\frac{1}{4}$ on W. face, and unwitnessed.

At the corner point.

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, with the original corner monument alongside, for $\frac{1}{4}$ sec. corner, with brass cap marked

$\frac{1}{4}$
 S23 | S24
 1934

18x18x12 ins., N. and S. of post, 3 ft. dist. dig pits,

Thence

N.0°02'E., with continuous measurement.

48.50 Wash, 8 links wide, 5 feet deep, drains N.80°W.

70.40 Wash, 10 links wide, 4 feet deep, heads S.80°W., 2 chains distant, drains N.65°E.

80.01 On gentle rolling NE. slope, 20 feet below $\frac{1}{4}$ sec. cor.

The corner of sec. 13, 14, 23, and 24, which is a quartzite stone, 14x9x6 ins., loosely set, marked 3 notches on S., and 1 notch on E. edge, and unwitnessed.

At the corner point.

Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, with the original corner monument alongside, for corner of secs. 13, 14, 23, and 24, with brass cap marked

T20S | R9W
 S14 | S13
 S23 | S24
 1934

of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of corner. raise a mound

Land, slightly rolling with general northeasterly exposure and drainage.

Soil, deep sandy loam, with small rocks on surface; 2nd rate.

Undergrowth, shadscale and grass.

No timber.

Fair grazing land.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISION OF
T. 20 S., R. 9 W.

Chains

N.0°02'E., between secs. 13 and 14.

Over slightly rolling land, through medium dense shade scale

11.00 Wash, 4 links wide, 2 feet deep, drains N.60°E.

16.00 Wash, 5 links wide, .1 ft. deep, drains N.70°E.

40.01 On slightly rolling land, 15 feet below sec. corner

The $\frac{1}{4}$ sec. corner, which is a quartzite stone, 16x12x3 ins., loosely set, marked $\frac{1}{4}$ on W. face, and unwitnessed.

At the corner point.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, with the original corner monument alongside, for $\frac{1}{4}$ sec. corner, with brass cap marked

$\frac{1}{4}$
S14 | S13
1934

raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of corner.

Thence

N.0°01'E., with continuous measurement.

72.50 Old road, bears N.40°E. and S.40°W.

80.02 On slightly rolling land, nearly level with $\frac{1}{4}$ sec. cor.

The corner of secs. 11, 12, 13, and 14, which is a quartzite stone, 16x10x5 ins., firmly set, marked 4 notches on S. and 1 notch on E. edge, and unwitnessed.

At the corner point 5 ft. long, 2 ins. diam., 28 ins. in the ground,

Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, with the original corner monument alongside, for corner of secs. 11, 12, 13, and 14, with brass cap marked

T20S | R9W
S11 | S12
S14 | S15
1934

raise a mound, of stone, 3 ft. base, 2 ft. high, W. of corner.

Land, slightly rolling, with general northeasterly exposure and drainage.

Soil, deep sandy loam, with scattered patches of pebbles on surface; 2nd rate.

Undergrowth, medium dense shade scale.

No timber.

Fair grazing land.

N.0°01'E., between secs. 11 and 12.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISION OF
T. 20 S., R. 9 W.

Chains

- 18.00 Over slightly rolling land, through medium dense shade-scale undergrowth.
- 18.00 Old, road, bears N.35°E. and S.35°W.
- 20.60 Enter rolling hilly land, bears N.30°E. and S.30°W.; ascend gradually over general E. slope.
- 24.70 Top of ascent on E. slope, 20 feet above sec. corner, bears E. and W.; descend gradually along general NE. slope.
- 36.00 Base of descent, 15 feet below top of ascent, bears E. and W.; ascend gradual S. slope.
- 40.00 On gradual S. slope, 40 feet above base of descent.

The $\frac{1}{4}$ sec. corner, which is a quartzite stone, 18x16x8 ins., loosely set, marked $\frac{1}{4}$ on W. face, and unwitnessed.

At the corner point.

Set an iron post, 3 ft. long, 1 ins. diam., 28 ins. in the ground, with the original corner monument alongside, for the $\frac{1}{4}$ sec. corner, with brass cap marked



raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of corner.

Thence


N.0°02'E., with continuous measurement.

- 44.20 Slope changes from S. to E.; thence along general E. slope of hill.
- 48.00 Top of ascent on E. slope of hill, 45 feet above $\frac{1}{4}$ sec. corner, bears E. and W.; descend gradual N. slope.
- 61.10 Base of hills, bears W. and S.70°E.; thence over nearly level land.
- 76.00 Old road, bears W. and S.85°E.
- 80.04 On nearly level land, 100 feet below top of descent.

The corner of secs. 1, 2, 11, and 12, which is a quartzite stone, 18x8x7 ins., loosely set, marked 5 notches on S. and 1 notch on E. edge, and unwitnessed.

At the corner point.

Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, with the original corner monument alongside, for corner of secs. 1, 2, 11, and 12, with brass cap mkd.



raise a mound of stone, 3 ft. base, 2 ft. high, W. of corner.

Land, nearly level desert, and low rolling hills with general easterly exposure and drainage.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISION OF

T. 20 S., R. 9 W.

Chains

Soil, sandy loam on hills, 3rd rate; deep clay loam on desert, 2nd rate.

Undergrowth, medium dense shadscale.

No timber.

Fair grazing land.

N.2°15'E., between secs. 1 and 2.

Over nearly level valley land, through medium dense shadscale undergrowth.

40.12 On nearly level valley land.

The $\frac{1}{4}$ sec. corner, which is a quartzite stone, 18x12x5 ins., firmly set, marked $\frac{1}{4}$ on W. face, and unwitnessed.

At the corner point.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, with the original corner monument alongside, for $\frac{1}{4}$ sec. corner, with brass cap marked

$\frac{1}{4}$
S2|S1
1934

of stone, 3 ft. base, 2 ft. high, W. of corner. raise a mound

Thence .

N.2°05'E., with continuous measurement.

84.15 The corner of secs. 1, 2, 35, and 36, on the N. boundary of the township, heretofore described.

Land, nearly level, with northeasterly drainage.

Soil, deep clay loam; 2nd rate.

Undergrowth, medium dense shadscale.

No timber.

Fair grazing land.

SUBDIVISION OF T. 20 S., R. 9 W.

From the standard corner of secs. 34 and 35, on the S. boundary of the township, heretofore described.

N.0°01'W., between secs. 34 and 35, parallel to the mean course of the S. 5 miles of the 1st Meridional sec. line.

Over nearly level land, through medium dense shadscale, and short desert grass.

9.90 Wash, 10 links wide, 4 feet deep, drains E.

13.50 Old road, bears W. and S.80°E.

SUBDIVISION OF T. 20 S., R. 9 W.

Chains

40.00

On nearly level land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. corner, with brass cap marked

↑
S34 | S35
1934

of stone, 3 ft. base, 2 ft. high, W. of corner. raise a mound

67.90

Old road, bears S.80°E. and N.80°W.

79.00

Base of low bench, bears SW. and N.

80.00

On gentle SE. slope, 30 feet above $\frac{1}{4}$ sec. corner.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for corner of secs. 26, 27, 34, and 35, with brass cap marked

T20S | R9W
S27 | S26

S34 | S35
1934

of stone, 4 ft. base, 3 ft. high, W. of corner. raise a mound

Land, nearly level, with general southeasterly exposure and drainage.

Soil, deep sandy loam, with scattered patches of rock on surface; 2nd rate.

Undergrowth, medium dense shadscale and grass.

No timber.

Fair grazing land.

East, on a random line between secs. 26 and 35.

40.00

Set temp. $\frac{1}{4}$ sec. corner.

79.92

Intersect N. and S. line, 3 links S. of corner of secs. 25, 26, 35, and 36.

Thence

S.89°59'W., on true line between secs. 26 and 35.

Ascend gradually over slightly rolling land, through medium dense shadscale and grass.

8.70

Old road, bears N.20°E. and S.20°W.

12.50

Top of spur, 40 feet above corner, projects S. about 5 chains to end; descend gradual W. slope.

33.90

Base of descent, 15 feet below spur, bears N. and S.; ascend gradual SE. slope of spur.

39.96

On gradual SE. slope, 85 feet above base of ascent.

SUBDIVISION OF T. 20 S., R. 9 W.

Chains

Set an iron post, 3 ft. long, 1 in. diam., over a chiseled X, on exposed surface rock, and in a mound of stone, 6 feet base, to top of post, for $\frac{1}{4}$ sec. corner, with brass cap marked.

$\frac{1}{4}$ S 26

S 35

1934

- 46.70 Spur, 30 feet above $\frac{1}{4}$ sec. corner, projects S. about 10 chains distant to end; descend gradual W. slope.
- 56.90 Base of spur, bears N. and S.; continue gradual descent over W. slope.
- 58.90 Wash, 10 links wide, 1 ft. deep, drains S.10°E., at base of descent, 70 feet below spur, bears N.10°W., and S.10°E.; ascend gradual rolling E. slope.
- 72.00 Wash, 15 links wide, 3 feet deep, in draw, 20 feet deep, drains S.60°E.
- 79.92 The corner of secs. 26, 27, 34, and 35, 60 feet above base of descent.

Land, gently rolling, and rolling low hills, with general southeasterly exposure and drainage.

Soil, deep sandy loam, mixed with rock and gravel; 2nd rate; and shallow rocky sandy loam on hills.

Undergrowth, shadscale and grass.

No timber.

Fair grazing land.

N.0°01'W., between secs. 26 and 27.

Over slightly rolling land and general E. slope, through medium dense shadscale, white sagebrush, and short grass.

- 3.60 Wash, 10 links wide, 1 ft. deep, in draw, 15 feet deep, drains S.60°E.
- 28.50 Rocky wash, 10 links wide, 4 feet deep, drains S.70°E.
- 40.00 On gentle E. slope, nearly level with sec. corner.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. corner, with brass cap marked

$\frac{1}{4}$
S27 | S26

1934.

of stone, 3 ft. base, 3 ft. high, W. of corner. raise a mound

- 45.00 Begin gradual ascent over gentle SE. slope, bears NE. and SW.
- 56.20 Old road, bears NE. and S.60°W.
- 69.10 Draw, 20 feet deep, drains S.30°E. about 5 chains distant, thence E.; ascend over S. slope of rolling

SUBDIVISION OF T. 20 S., R. 9 W.

Chains

hilly land, bears E. and W.

72.80 Spur, 110 feet above $\frac{1}{4}$ sec. corner, projects E.; ascend gradual SE. slope.

80.00 On gradual SE. slope, 15 feet above spur.

Set an iron post, 3 ft. long, 2 ins. diam., 18 ins. in the ground, to solid rock, and in a mound of stone to top, for corner of secs. 22, 23, 26, and 27, with brass cap marked

T20S	R9W
S22	S23
S27	S26
1934	

Deposit quartzite stone, 10x8x8 ins., at base of post, marked with a X.

Land, slightly rolling, and rolling hills, with general southeasterly exposure and drainage.

Soil, deep sandy loam, with scattered rocks on surface; 2nd rate.

Undergrowth, shadscale, white sagebrush and grass.

No timber.

Fair grazing land.

N.89°59'E., on a random line between secs. 23 and 26.

40.00 Set temp. $\frac{1}{4}$ sec. corner.

79.90 Intersect N. and S. line, 2 links S. of corner of secs. 23, 24, 25, and 26.

Thence

S.89°58'W., on true line between secs. 23 and 26.

Over gentle rolling N. slope, through medium dense shadscale, sagebrush and grass.

34.90 Wash, 10 links wide, 1 ft. deep, from SW., through depression in low rise, drains NE.

39.95 On gentle rolling NE. slope, 25 feet above sec. corner.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. corner, with brass cap marked

$\frac{1}{4}$	S 23
	S 26
1934	

raise a mound of stone, 4 ft. base, 4 ft. high, N. of corner.

42.00 Low rise, about 10 feet high, bears N.60°W. and S.60°E.

58.20 Old road, bears N.20°E. and S.20°W.

SUBDIVISION OF T. 20 S., R. 9 W.

Chains

- 62.90 Ascend abrupt E. slope of hills, bears N.30°E. and S.30°W.
- 69.90 Ascent becomes more gradual, bears N. and S., thence over rolling E. slope.
- 77.80 Top of ascent, 290 feet above $\frac{1}{4}$ sec. corner, bears N.10°E. and S.10°W.; descend gradually.
- 79.90 The corner of secs. 22, 23, 26, and 27, 5 ft. below top of ascent.

Land, gently rolling on the E. 62.90 chains, with general northeasterly exposure and drainage; remainder of mile, rolling hills, with general easterly exposure and drainage.

Soil, deep sandy loam, mixed with rock and gravel; 3rd rate.

Undergrowth, shadscale, sagebrush and grass.

No timber.

Fair grazing land.

N.0°01'W., between secs. 22 and 23.

Ascend gradual SE. slope of rolling hilly land, through medium dense shadscale, sagebrush and grass.

- 18.00 Top of ascent, 45 feet above sec. corner, bears N.70°E. and S.70°W.; descend gradual N. slope.
- 31.20 Base of rolling hills, bears E. and W.; descend gradual N. slope of gently rolling land.
- 37.60 Wash, 10 links wide, 2 ft. deep, drains N.60°E.
- 40.00 On gentle N. slope, 190 feet below top of ascent.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. corner, with brass cap marked

$\frac{1}{4}$
 S22 | S23
 1934

raise a mound


of stone, 4 ft. base, 4 ft. high, W. of corner.

- 45.60 Wash, 20 links wide, 4 feet deep, drains N.80°E.
 - 49.20 Old road, bears E. and W.
 - 50.00 Begin ascent over SE. slope of rolling hilly land, bears E. and W.
 - 60.30 Spur, 65 feet above $\frac{1}{4}$ sec. corner, projects E.; descend gradual NE. slope.
 - 65.20 Draw, 25 feet; below spur, drains S.60°E.; ascend gradual, rocky SE. slope.
 - 80.00 On gradual, rocky SE. slope, 55 feet above draw.
- Set an iron post, 3 ft. long, 2 ins. diam., 12 ins. in

SUBDIVISION OF T. 20 S., R. 9 W.

Chains

the ground to solid rock, with a quartzite stone, 10x6x6 ins., marked X, deposited at the base, and in a mound of stone, to top, for corner of secs. 14, 15, 22, and 23, with brass cap marked



Land, rolling hills, with general easterly exposure and drainage.

Soil, deep sandy loam, mixed with rock and gravel; 3rd rate.

Undergrowth, shadscale, sagebrush and grass.

No timber.

Fair grazing land.

N.89°58'E., on a random line between secs. 14 and 23.

40.00 Set temp. $\frac{1}{4}$ sec. corner.

79.94 Intersect N. and S. line, 2 links S. of corner of secs. 13, 14, 23, and 24.

Thence

S.89°57'W., on true line between secs. 14 and 23.

Ascend gradually over gently rolling land and general NE. slope, through medium dense shadscale, sagebrush and grass.

9.00 Wash, 10 links wide, 3 feet deep, drains NE.

31.40 Old road, bears N.30°E. and S.30°W.

39.97 On gentle rolling NE. slope, 110 feet above sec. corner.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. corner, with brass cap marked

S 14

S 23

raise a mound

of stone, 4 ft. base, 3 ft. high, N. of corner.

65.80 Base of hills, bears N. and S.; ascend gradually over steep SE. slope.

79.94 The corner of secs. 14, 15, 22, and 23, 300 feet above $\frac{1}{4}$ sec. corner.

Land, E. 65.80 chains, gently rolling with general north-easterly exposure and drainage; remainder of mile rolling hilly land, with southeasterly exposure and drainage.

Soil, deep sandy loam, 2nd rate, on E. portion; remainder of mile, deep sandy loam, mixed with rock and gravel; 3rd rate.

SUBDIVISION OF T. 40 S., R. 9 W.

Chains

and 810

Undergrowth, shadscale, sagebrush and grass.
 No timber.
 Fair grazing land.

N.0°01'W., between secs. 14 and 15.

Ascend abrupt SE. slope, of broken hilly land, through medium dense shadscale, sagebrush and grass.

19.00 Spur, 270 feet above corner, slopes easterly; thence ascend over steep, broken general E. slope of broken hills.

38.00 Spur, 60 feet above last spur, projects S.80°E.; descend abrupt broken NE. slope.

40.00 On steep broken NE. slope, 30 feet below spur.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. corner, with brass cap marked

$\frac{1}{4}$
 S15 | S14
 1934

of stone, 4 ft. base, 3 ft. high, W. of corner. raise a mound

45.60 Draw, 145 feet below $\frac{1}{4}$ sec. corner, heads S.60°W., about 6 chains distant, and drains N.60°E.; ascend abrupt broken, general SE. slope.

68.30 Rocky spur, 145 feet above draw, projects N.70°E.; descend abrupt rocky NE. slope.

72.50 Draw, near head, 105 feet below spur, drains E.; ascend steep SE. slope.

76.60 Top of ascent, 80 feet above draw, bears E. and W.; descend abrupt NE. slope.

80.00 On steep NE. slope, 95 feet below top of ascent.

Set an iron post, 3 ft. long, 2 ins. diam., 8 ins. in the ground, to solid rock, and in a mound of stone to top, for corner of secs. 10, 11, 14, and 15, with brass cap marked

T20S | R9W
 S10 | S11
 S15 | S14
 1934

Deposit quartzite stone, 10x6x8 ins., at base of post marked X.

Land, broken rocky hills, with general easterly exposure and drainage.

Soil, sandy loam, mixed with rock and gravel; 3rd rate.

Undergrowth, shadscale, sagebrush and grass.

No timber.

Fair grazing land.

SUBDIVISION OF T. 20 S., R. 9 W.

Chains

N.89°57'E., on random line between secs. 11 and 14.

40.00 Set temp. $\frac{1}{4}$ sec. corner.

79.88 Intersect N. and S. line, 7 links S. of corner of secs. 11, 12, 13, and 14.

Thence

S.89°54'W., on true line between secs. 11 and 14.

Ascend gradual E. slope of slightly rolling land, through shadscale, sagebrush and grass undergrowth.

8.20 Old road, bears N.10°E. and S.10°W.

21.60 Road, bears N.30°W. and S.30°E.

39.94 On gently rolling E. slope, 125 feet above sec. corner.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. corner, with brass cap marked

S 11

S 14

1934

raise a mound of stone, 4 ft. base, 4 ft. high, N. of corner.

55.40 East base of hills, bears N.20°W. and S.20°E.; ascend abrupt broken E. slope.

66.80 Slope changes from E. to NE., bears N.60°E. and S.60°W.; ascend abrupt NE. slope.

79.88 The corner of secs. 10, 11, 14, and 15, 540 feet above $\frac{1}{4}$ sec. corner.

Land, gently rolling on E. 55.40 chains, with general easterly exposure and drainage; remainder of mile is broken hilly land, with general northeasterly exposure and drainage.

Soil, E. 55.40 chains, deep sandy loam; with patches of rock, 2nd rate; remainder of mile, loose sandy loam, mixed with rock and gravel, 3rd rate; quartzite formation.

Undergrowth, shadscale, sagebrush and grass.

No timber.

Fair grazing land.

N.0°01'W., between secs. 10 and 11.

Descend over steep broken NE. slope of broken hills, through medium dense sagebrush, shadscale and grass.

15.50 Steep rocky draw, 60 feet deep, drains N.80°E.; continue descent.

40.00 On steep broken NE. slope, 400 feet below sec. corner.

Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in

SUBDIVISION OF T. 20 S., R. 9 W.

Chains.

the ground, to solid rock, and in a mound of stone, to top, for $\frac{1}{4}$ sec. corner, with brass cap marked

$\frac{1}{4}$
 S10 | S11
 1934

Deposit a quartzite stone, 10x6x6 ins., at base of post, marked X.

- 63.00 Base of broken hills, bears N.30°W. and S.30°E.; descend gradual rolling NE. slope.
- 74.10 Junction of roads from S.60°E, and S.30°E. and N.60°W.
- 80.00 On gradual NE. slope, 250 feet below $\frac{1}{4}$ sec. corner.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for corner of secs. 2, 3, 10, and 11, with brass cap marked

T20S | R9W
 S3 | S2

 S10 | S11
 1934

of stone, 3 ft. base, 3 ft. high, W. of corner. raise a mound

Land, south 63.00 chains, broken rocky hills; remainder of mile, slightly rolling.

Soil, south 63.00 chains, shallow, loose, sandy loam; 3rd rate; remainder of mile, deep sandy loam, 2nd rate.

Undergrowth, sagebrush, shadscale and grass.

No timber.

Fair grazing land.

N.89°54'E., on random line between secs. 2 and 11.

40.00 Set temp. $\frac{1}{4}$ sec. corner.

80.00 Intersect the N. and S. line, 2 links N. of the corner of secs. 1, 2, 11, and 12.

Thence

S.89°55'W., on true line, between secs. 2 and 11.

Over nearly level land, through medium dense short sagebrush and shadscale.

40.00 On nearly level land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with a quartzite stone, 10x8x8 ins., marked $\frac{1}{4}$ on one face, buried alongside, for $\frac{1}{4}$ sec. corner, with brass cap marked

S 2

 S 11
 1934

raise a mound

SUBDIVISION OF T. 20 S., R. 9 W.

Chains

of stone, 4 ft. base, 3 ft. high, N. of corner.
 Ascend gradually over slightly rolling NE. slope.
 80.00 The corner of secs. 2, 3, 10, and 11, 60 feet above $\frac{1}{4}$ sec. corner.
 Land, nearly level, with general northeasterly exposure and drainage.
 Soil, deep sandy loam; 2nd rate.
 Undergrowth, sagebrush and shadscale.
 No timber.
 Fair grazing land.

N.0°01'W., on true line. between secs. 2 and 3.
 Over nearly level land, through medium dense sagebrush, scattered shadscale and grass.

8.50 Old road, N.60°E. and S.60°W.

40.00 On nearly level land.


Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. corner, with brass cap marked



raise a mound of stone, 3 ft. base, 2 ft. high, W. of corner.

84.23 Intersect the N. boundary of the township.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, with a quartzite stone, 18x5x5 ins., marked C C and 6 grooves on S. face, deposited alongside of post, for closing corner of secs. 2 and 3, with brass cap mkd.



raise a mound of stone, 3 ft. base, 2 ft. high, S. of corner.

From point of intersection, the corner of secs. 34 and 35, T. 19 S., R. 9 W., heretofore described, bears S.89° 58'E., 2.94 chains distant.

Land, nearly level.
 Soil, deep sandy loam; 2nd rate.
 Undergrowth, sagebrush, shadscale and grass.
 No timber.
 Fair grazing land.

SUBDIVISION OF T. 20 S., R. 9 W.

Chains

From the standard corner of secs. 33 and 34, on the S. boundary of the township heretofore described.

N.0°01'W., between secs. 33 and 34.

Descend gradually over steep rocky NW. slope of rolling mountainous land, through medium dense sagebrush undergrowth.

10.70 Head of draw, 20 feet below corner, drains S.40°W.; ascend gradual S. slope.

14.00 Ridge, 50 feet above head of draw, bears NW. and SE.; thence over general broken E. slope.

30.70 Draw near head, 65 feet below ridge, drains E.; ascend gradual SE. slope.

37.90 Low spur, 20 feet above head of draw, projects east; descend gradual N. slope.

40.00 On gradual N. slope, 10 feet below spur.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. corner, with brass cap marked

$\frac{1}{4}$
 S33 | S34
 1934

of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, W. of corner. raise a mound

42.30 Draw, 25 feet below $\frac{1}{4}$ sec. corner, drains S.80°E.; ascend gradual S. slope.

44.40 Spur, 10 feet above draw, projects SE.; descend abrupt NE. slope.

45.10 Main draw from NW., 25 feet below spur, drains S.70°E.; ascend gradual SW. slope.

56.60 Spur, 80 feet above draw, projects SE.; descend gradual NE. slope.

61.60 Head of draw, 30 feet below spur, drains SE.; ascend abrupt S. slope.

67.60 Spur, 110 feet above head of draw, projects S.70°E.; descend abrupt N. slope.

76.60 Draw, from west, 165 feet below spur, drains SE.; ascend gradual S. slope.

80.00 On general top of low spur, 30 feet above draw, projects S.80°E.

Set an iron post, 3 ft. long, 2 ins. diam., 18 ins. in the ground to solid rock, and in a mound of stone to top, with a quartzite stone, 8x6x6 ins., marked X, at base of post, for corner of secs. 27, 28, 33, and 34, with brass cap marked

T20S | R9W
 S28 | S27
 S33 | S34
 1934

Land, rolling mountainous, with general easterly expo-

SUBDIVISION OF T. 20 S., R. 9 W.

Chains

sure and drainage; quartzite formation.

Soil, shallow loose sandy loam, mixed with rock and gravel; 3rd rate.

Undergrowth, sagebrush and grass.

No timber.

Fair grazing land.

East, on random line, bet. secs. 27 and 34.

40.00 Set temp. $\frac{1}{4}$ sec. corner.

79.92 Intersect N. and S. line, 2 links S. of corner of secs. 26, 27, 34, and 35.

Thence

S.89°59'W., on true line, between secs. 27 and 34.

Ascend gradual SE. slope, of rolling land, through medium dense shadscale and scattered sagebrush.

1.00 Enter bench land, gently sloping E., bears N. and S. 30°W.; ascend gradually over top of bench.

28.60 Old road, bears N.10°E. and S.10°W.

33.30 Leave bench and enter rolling hills, bears N. and S.; ascend gradual NE. slope.

39.96 At top of ascent, on N. slope, 170 feet above corner, bears NE. and SW.

Set an iron post, 3 ft. long, 1 in. diam., over a chiseled X, on quartzite surface rock, in a mound of stone, 5 ft. base to top of iron post, for $\frac{1}{4}$ sec. corner, with brass cap marked.

$\frac{1}{4}$ S 27

 S 34
 1934

Descend gradual NW. slope.

43.50 Draw, 35 feet below $\frac{1}{4}$ sec. corner, drains NE.; ascend abrupt SE. slope.

46.70 South point of spur, from N.30°W., 55 feet above draw; descend gradual SW. slope.

52.00 Recross same draw, 20 feet below point of spur, drains S.70°E.; ascend gradually along general S. slope.

63.30 Bend, in same draw, 50 feet above last crossing, from N.30°W., drains NE.; ascend gradual NE. slope.

71.20 Low spur, 30 feet above draw, projects SE.; thence along general S. slope.

76.10 Draw, nearly level with spur, drains S.75°E.; ascend gradual NE. slope.

79.92 The corner of secs. 27, 28, 33, and 34, 30 feet above

SUBDIVISION OF T. 20 S., R. 9 W.

Chains

draw.

Land, rolling bench and foothills, with general easterly exposure and drainage.

Soil, shallow sandy loam, mixed with rock and gravel; 3rd rate.

Undergrowth, sagebrush and shadscale.

No timber.

Fair grazing land.

N.0°01'W., between secs. 27 and 28.

Descend gradually along general E. slope of rolling mountainous land, through undergrowth of medium dense sagebrush.

- 4.30 Draw, 5 ft. below corner, drains S.30°E.; ascend abrupt rocky S. slope.
- 8.30 Spur, 100 feet above draw, projects SE.; descend gradually over general E. slope.
- 15.00 Head of draw, 10 feet below spur, drains SE.; ascend gradual SE. slope.
- 18.10 Spur, 20 feet above head of draw, projects E.; descend abrupt N. slope.
- 21.90 Head of draw, 65 feet below spur, drains N.80°E.; ascend gradually along general E. slope.
- 40.00 On general top of spur, 80 feet above head of draw, projects E..
- Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, for $\frac{1}{4}$ sec. corner, with brass cap marked
- $\frac{1}{4}$
 S28 | S27
 1934
- raise a mound
- of stone, 4 ft. base, $1\frac{1}{2}$ ft. high, W. of corner.
- Descend gradual N. slope.
- 44.50 Draw from N.60°W., 20 feet below $\frac{1}{4}$ sec. corner, drains E. about 5 chains distant, thence SE.; ascend abrupt rocky S. slope.
- 57.30 Spur, 310 feet above draw, projects S.80°E.; descend gradual E. slope.
- 61.90 Descent becomes abrupt over steep NE. slope, bears E. and W.
- 70.50 Draw, heads about 12 chains W., 155 feet below spur, drains E. about 15 chains distant, thence SE.; gradually ascend over steep SE. slope.
- 74.40 Spur, 65 feet above draw, projects S.80°E.; descend abrupt N. slope.

Chains

72.70 Draw, 100 feet below spur, drains S.80°E.; ascend abrupt S. slope.

80.00 On steep rocky S. slope, 40 feet above draw.

Set an iron post, 3 ft. long, 2 ins. diam., 18 ins. in the ground to solid rock, with a quartzite stone, 10x6x4 ins., marked X, deposited at the base, and in a mound of stone to top, for corner of secs. 21, 22, 27, and 28, with brass cap marked

T20S	R9W
S21	S22
S28	S27
1934	

Land, rolling and mountainous, with general easterly exposure and drainage.

Soil, shallow sandy loam, mixed with rock and gravel; 4th rate.

Undergrowth, medium dense sagebrush and grass.

No timber.

Fair grazing land.

N.89°59'E., on a random line, between secs. 22 and 27.

40.00 Set temp. $\frac{1}{4}$ sec. corner.

79.96 Intersect N. and S. line, 2 links S. of the corner of secs. 22, 23, 26, and 27.

Thence

S.89°58'W., on true line, between secs. 22 and 27.

Ascend gradual E. slope, of rolling hills; through medium dense sagebrush, shadscale and grass.

15.00 Spur, 40 feet above sec. corner, projects S.70°E.; descend gradual W. slope.

18.40 Draw, 25 feet below spur, drains S.70°E.; ascend gradual E. slope.

39.98 On gradual E. slope, 100 feet above draw.

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ sec. corner, with brass cap marked

$\frac{1}{4}$	S 22
	S 27
1934	

raise a mound of stone, 3 ft. base, 1 $\frac{1}{2}$ ft. high, N. of corner.

40.90 Draw, 10 feet deep, drains NE. about 2 chains distant, thence easterly; ascend

55.00 Spur, 85 feet above $\frac{1}{4}$ sec. corner, projects S.75°E.; ascend gradually over steep SE. slope.

SUBDIVISION OF T. 20 S., R. 9 W.

Chains

- 65.80 Top of ascent, 190 feet above spur, bears N.60°W., and S.60°E.; descend gradually over steep SW. slope.
- 70.20 Same draw as at 40.90 chains, 40 feet below top of ascent drains SE., about 4 chains distant, thence easterly; ascend rocky E. slope.
- 73.80 Spur, 60 feet, above draw, projects S.70°E.; ascend gradually over steep SE. slope.
- 79.96 The corner of secs. 21, 22, 27, and 28, 65 feet above spur.
- Land, rolling hills, with general easterly exposure, and drainage.
- Soil, shallow loose sandy loam, mixed with rock and gravel; 4th rate; quartzite formation.
- Undergrowth, sagebrush, shadscale and grass.
- No timber.
- Fair grazing land.

N.0°01'W., between secs. 21 and 22.

Ascend abrupt S. slope, of rocky, rolling mountainous land, through medium dense sagebrush undergrowth.

- 2.90 Spur, 55 feet above sec. corner, projects S.80°E.; descend abrupt rocky NE. slope.
- 6.60 Draw, 50 feet below spur, drains SE.; ascend abrupt SE. slope.
- 11.40 Spur, 85 feet above draw, projects S.70°E.; descend gradually over general E. slope.
- 15.60 Draw, 5 feet below spur, drains S.80°E.; ascend gradual SE. slope.
- 19.80 Spur, 30 feet above draw, projects S.85°E.; descend gradually over steep general NE. slope.
- 23.20 Draw, 25 feet below spur, drains E.; ascend gradual SE. slope.
- 30.60 Spur, 35 feet above draw, projects E.; descend steep broken NE. slope.
- 33.40 Draw, 3 chains wide, 40 feet deep, drains N.70°E.; continue descent over NE. slope.
- 40.00 On steep broken NE. slope, 40 feet below spur.

Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground to solid rock, and in a mound of stone to top, for $\frac{1}{4}$ sec. corner, with brass cap marked

S21 | S22

1934

of stone, 5 ft. base, 4 ft. high, W. of corner.

SUBDIVISION OF T. 20 S., R. 9 W.

Chains

- 43.10 Ridge, bears N.70°E. and S.70°W.; descend over steep broken NE. slope.
- 54.80 Descent becomes abrupt over steep broken N. slope, bears E. and W.
- 58.40 Draw, 195 feet below ridge, drains N.80°E.; ascend abrupt SE. slope.
- 63.50 Ridge, 80 feet above draw, bears N.75°E. and S.75°W.; descend abrupt NE. slope.
- 80.00 On steep broken NE. slope, 170 feet below ridge.

Set an iron post, 3 ft. long, 2 ins. diam., 20 ins. in the ground, to solid rock, and in a mound of stone to top, for corner of secs. 15, 16, 21, and 22, with brass cap marked

T20S	R9W
S16	S15
S21	S22
1934	

raise a mound of stone, 4 ft. base, 3 ft. high, W. of corner.

Land, rolling and broken mountainous, with general easterly and northeasterly exposure and drainage.

Soil, shallow loose sandy loam, mixed with rock and gravel; 4th rate; quartzite formation.

Undergrowth, sagebrush and grass.

No timber.

Fair grazing land.

N.89°58'E., on a random line, between secs. 15 and 22.

- 40.00 Set temp. $\frac{1}{4}$ sec. corner.
- 79.88 Intersect N. and S. line, 5 links N. of corner of secs. 14, 15, 22, and 23.
- Thence
- West, on true line, between secs. 15 and 22.
- Ascend gradual SE. slope of rolling mountainous land, through medium dense sagebrush and grass.
- 9.70 Draw, 75 feet above corner, drains SE.; ascend abrupt E. slope.
- 19.40 Ridge, 265 feet above draw, bears N.10°E. and S.10°W.; descend abrupt rocky W. slope.
- 28.80 Base of abrupt descent, bears N. and S.; descend gradual W. slope.
- 32.70 Enter dry circular bottom of a basin, bears N. and S.
- 39.94 In dry bottom of basin, 310 feet below ridge.
- Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in

SUBDIVISION OF T. 20 S., R. 9 W.

Chains

the ground, for $\frac{1}{4}$ sec. corner, with brass cap marked

$\frac{1}{4}$ S 15
 S 22
 1934

of stone, 3 ft. base, 2 ft. high, N. of corner. raise a mound

North edge of basin, bears N. about 6.00 chains distant, and S. edge bears S. about 7 chains distant.

A low saddle in ridge, bears S. about 20 chains distant.

45.80 Leave basin, bears N. and S.; ascend gradual SE. slope.

60.70 Old road, bears N.15°E. and S.20°E., on top of sandy ridge, bears N.60°E., and S.60°W., 65 feet above basin; ascend gradual rolling E. slope.

75.30 Ascent becomes abrupt over steep NE. slope, bears N. and S.

79.88 The corner of secs. 15, 16, 21, and 22, 115 feet above ridge.

Land, rolling mountainous, with general easterly exposure and drainage.

Soil, shallow loose sandy loam, mixed with rock and gravel; 3rd rate; quartzite formation.

Undergrowth, sagebrush and grass.

No timber.

Fair grazing land.

N.0°01'W., between secs. 15 and 16.

Descend abrupt NE. slope of rolling mountainous land, through medium dense sagebrush, scattered shadscale and grass.

3.50 Draw, 55 feet below the section corner, drains NE. about 10 chains distant, thence northerly; descend gradual rolling NE. slope of wide valley.

40.00 On gentle NE. slope, of wide valley, 240 feet below sec. corner.

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ sec. corner, with brass cap marked

$\frac{1}{4}$
 S16 | S15
 1934


of stone, 3 ft. base, 3 ft. high, W. of corner. raise a mound

80.00 On gradual NE. slope, 145 feet below $\frac{1}{4}$ sec. corner.

Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for corner of secs. 9, 10, 15, and 16, with brass cap marked

SUBDIVISION OF T. 20 S., R. 9 W.

Chains



raise a mound of stone, 4 ft. base, 3 ft. high, W. of corner.

Land, gently rolling valley, with general northeasterly exposure and drainage.

Soil, deep sandy loam, mixed with gravel and scattered rock; 3rd rate.

Undergrowth, medium dense sagebrush, shadscale and grass.

No timber.

Fair grazing land.

East, on a random line, between secs. 10 and 15.

40.00 Set temp. $\frac{1}{4}$ sec. corner.

79.90 Intersect N. and S. line, 5 links N. of corner of secs. 10, 11, 14, and 15.

Thence

N.89°58'W., on true line between secs. 10 and 15.


Ascend abrupt rocky NE. slope of broken mountainous land, through medium dense sagebrush, scattered shadscale and Brigham tea undergrowth.

10.90 Ridge, 200 feet, above sec. corner, bears N. and S.10°E.; descend abrupt rocky W. slope.

35.00 Base of abrupt W. slope; bears N. and S.; descend gradual W. slope of wide valley.

39.95 On gentle W. slope, 640 feet below ridge.

Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, with a quartzite stone, 18x10x6 ins., marked $\frac{1}{4}$ on one face, buried alongside, for $\frac{1}{4}$ sec. corner, with brass cap marked



raise a mound of stone, 5 ft. base, 4 ft. high, N. of corner.

56.70 Wash, 20 links wide, 3 ft. deep, in bottom of valley, 35 feet below $\frac{1}{4}$ sec. corner, drains N.10°W.; ascend gradual E. slope.

72.30 Old road, bears N.20°W. and S.20°E.

79.90 The corner of secs. 9, 10, 15, and 16, 15 feet above wash.

Land, east 35.00 chains, broken and mountainous; remainder of mile, rolling valley; east 11 chains, easterly exposure and drainage; remainder of mile, general northwesterly exposure and drainage.

SUBDIVISION OF T. 20 S., R. 9 W.

Chains

Soil, east 35.00 chains, shallow sandy loam, mixed with rock and gravel, 4th rate; remainder of mile, deep sandy loam, mixed with small rock and gravel, 3rd rate.

Undergrowth, sagebrush, shadscale and Brigham tea.

No timber.

Fair grazing land.

N.0°01'W., between secs. 9 and 10.

Descend gradually over gentle E. slope of valley, through medium dense shadscale, sagebrush and grass.

36.90 Old road, bears N.10°W. and S.10°E.

40.00 On gentle east slope, 45 feet below sec. corner.

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ sec. corner, with brass cap marked

↑
S9 | S10
1934

raise a mound of stone, 4 ft. base, 4 ft. high, W. of corner.

Deposit quartzite, 10x7x4 ins., marked $\frac{1}{4}$ on W. face, alongside of iron post.

42.50 Road, bears E. and W. about 1.50 chains to junction with road from S.20°E., thence NW.; leave hills and enter open rolling land, bears NW. and N.60°E.

50.00 On nearly level land, 55 feet below $\frac{1}{4}$ sec. corner.

Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, with a quartzite stone, 14x6x6 ins., with 5 grooves on S. and 3 grooves on E. face, alongside of iron post, for corner of secs. 3, 4, 9, and 10, with brass cap marked

T20S | R9W
S4 | S3

S9 | S10
1934

raise a mound of stone, 3 ft. base, 3 ft. high, W. of corner.

Land, gentle W. slope of valley and slightly rolling desert, with general northeasterly exposure and drainage.

Soil, deep sandy loam, with scattered rock on surface; 3rd rate.

Undergrowth, shadscale, sagebrush and grass.

No timber.

Fair grazing land.

SUBDIVISION OF T. 20 S., R. 9 W.

Chains

S.89°58'E., on a random line, between secs. 3 and 10.

40.00 Set temp. $\frac{1}{4}$ sec. corner.

79.88 Intersect N. and S. line, 2 links S. of corner of secs. 2, 3, 10, and 11.

Thence

N.89°59'W., on true line between secs. 3 and 10.

Over nearly level land, through medium sage and shadscale.

6.50 Road, bears N.20°W. and S.30°E.

7.90 Base of N. point of rocky ridge, from S., bears S. about 50 links distant.

16.40 Road, bears N.80°E. and S.80°W.

39.94 On nearly level land, 40 feet above sec. corner.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. corner, with brass cap marked

S 3

S 10
1934

raise a mound
of stone, 3 ft. base, 3 ft. high, N. of corner.

52.40 Main wash, 14 links wide, 4 ft. deep, drains N. about 5 chains distant, thence NE.

79.88 The corner of secs. 3, 4, 9, and 10, about level with $\frac{1}{4}$ sec. corner.

Land, slightly rolling, with general northeasterly exposure and drainage.

Soil, deep sandy loam, with scattered patches of rock on surface; 2nd rate.

Undergrowth, sagebrush and shadscale.

No timber.

Fair grazing land.

N.0°01'W., on true line, between secs. 3 and 4.

Over slightly rolling land, through medium dense sagebrush, shadscale and grass.

40.00 On nearly level land.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, with a quartzite stone, 20x8x4 ins., marked $\frac{1}{4}$ on one face, alongside of iron post, for $\frac{1}{4}$ sec. corner, with brass cap marked

↑
S4 | S3
1934

raise a mound

SUBDIVISION OF T. 20 S., R. 9 W.

Chains

of stone, 3 ft. base, 3 ft. high, W. of corner.

46.60 Wash, 85 links wide, 4 feet deep, drains NE.

59.30 Road, bears N.40°W. and S.40°E.

68.70 Wash, 20 links wide, 4 feet deep, drains NE.

84.43 Intersect the N. boundary of the township.

On slightly rolling land.

Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, for closing corner of secs. 3 and 4, with brass cap marked

T19S R9W

S33

S4 | S3

T20S | R9W

C C

1934

raise a mound
of stone, 3 ft. base, 2 ft. high, S. of corner.

From point of intersection the corner of secs. 33 and 34, T. 19 S., R. 9 W., heretofore described, bears S.89°55'E. 2.60 chains distant.

Land, slightly rolling, with general northeasterly exposure and drainage.

Soil, deep sandy loam, with scattered rock on surface; 2nd rate.

Undergrowth, sagebrush, shadscale and grass.

No timber.

Fair grazing land.

From the standard corner of secs. 32 and 33, on the S. boundary of the township, heretofore described.

N.0°02'W., between secs. 32 and 33.

Ascend gradually over steep SW. slope of rolling mountainous land, through medium dense sagebrush and shadscale undergrowth.

29.70 Top of ascent, on steep W. slope, 245 feet above standard corner, bears E. and W.; descend gradually over steep NW. slope.

40.00 On steep NW. slope, 65 feet below top of ascent.

Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground to solid rock, and in a mound of stone to top, for $\frac{1}{4}$ sec. corner, with brass cap marked

$\frac{1}{4}$
S32 | S33

1934


raise a mound,

SUBDIVISION OF T. 20 S., R. 9 W.

Chains

- of stone, 3½ ft. base, 3 ft. high, W. of corner.
- 53.70 Draw, 135 feet below ¼ sec. corner, drains SW.; ascend gradual S. slope.
- 56.00 Spur, 20 feet above draw, projects S.60°W.; descend gradual NW. slope.
- 57.70 Draw, 15 feet, below spur, drains S.60°W.; ascend gradual SW. slope.
- 66.60 Top of main ridge, 110 feet, above draw, bears NW. and SE., about 10 chains distant, thence S.; descend gradually over steep NE. slope.
- 80.00 On steep NE. slope, 125 feet below ridge.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for corner of secs. 28, 29, 32, and 33, with brass cap marked



raise a mound

of stone, 3ft. base, 3 ft. high, W. of corner.

Land, rolling mountainous; S. 66.60 chains with general southwesterly exposure and drainage; remainder of mile, northeasterly exposure and drainage.

Soil, shallow loose sandy loam, mixed with rock and gravel; 4th rate.

Undergrowth, sagebrush and shadscale.

No timber.

Fair grazing land.

East, on a random line, between secs. 28 and 33.

40.00 Set temp. ¼ sec. corner.

80.04 Intersect N. and S. line, 2 links N. of corner of secs. 27, 28, 33, and 34.

Thence

N.89°59'W., on true line, between secs. 28 and 33.

Ascend gradual E. slope of rolling mountainous land, through medium dense sagebrush and shadscale undergrowth.

11.80 Ascent becomes abrupt over steep NE. slope, bears N. and S.

23.10 Top of steep spur, 230 feet above corner, projects SE.; descend gradually along steep, rocky S. slope.

37.20 Draw, 85 feet below spur, drains S. 2 chains distant, thence S.60°E.; ascend abrupt E. slope.

40.02 On steep E. slope, 75 feet above draw.

SUBDIVISION OF T. 20 S., R. 9 W.

Chains

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. corner, with brass cap marked

$\frac{1}{4}$ S 28 ✓

S 33

1934

raise a mound of stone, 3 ft. base, 2 ft. high, N. of corner.

- 45.20 Ridge, 120 feet above $\frac{1}{4}$ sec. corner, bears S.30°E., and NW.; descend gradually SW. slope.
- 50.80 Draw, 30 feet below ridge, heads NW. about 5 chains distant, drains SE.; ascend gradual E. slope.
- 55.40 Spur, 55 feet above draw, projects SE.; descend abrupt SW. slope.
- 68.60 Draw, 250 feet below spur, drains S.20°E.; ascend gradual SE. slope.
- 71.60 Spur, 5 feet above draw, projects S.; descend gradually over steep SW. slope.
- 78.50 Draw, 30 feet below spur, drains S.40°E.; ascend gradual NE. slope.
- 78.90 Road, bears SE. and NW.
- 80.04 The corner of secs. 28, 29, 32, and 33, 10 feet above draw.

Land, rolling mountainous, with general southeasterly exposure and drainage.

Soil, shallow loose sandy loam, mixed with rock and gravel; 4th rate. Quartzite formation.

Undergrowth, sagebrush, shadscale and grass.

No timber.

Fair grazing land.

N.0°02'W., between secs. 28 and 29.

Over rolling mountainous land, through medium dense sagebrush and shadscale undergrowth.

- 2.10 Road, bears N.30°W. and S.30°E.
- 2.60 Draw, nearly level with corner, heads N.30°W., about 7.50 chains distant, drains S.30°E.; ascend gradual rolling SW. slope.
- 8.70 Ridge, 15 feet above draw, bears W. and N.60°E.; ascend gradually along steep W. slope.
- 25.00 Top of ascent, 55 feet above ridge, bears W. and E.; descend gradually along steep NW. slope.
- 40.00 At base of abrupt descent, bears N.25°E. and S.25°W., 50 feet below top of ascent.

Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in

SUBDIVISION OF T. 20 S., R. 9 W.

Chains

the ground, to solid rock, with a quartzite stone, 10x6x6 ins., marked X, deposited at the base, and in a mound of stone to top, for $\frac{1}{4}$ sec. corner, with brass cap marked

$\frac{1}{4}$
S29 | S28
1934

Descend gradual rolling NW. slope.

- 44.40 Wash, 15 links wide, 1 $\frac{1}{2}$ feet deep, drains W.
- 68.00 Wash, 10 links wide, 2 feet deep, drains S.80°W.
- 78.00 Wash, 10 links wide, 2 feet deep, drains N.80°W.
- 80.00 On gentle NW. slope, 130 feet below $\frac{1}{4}$ sec. corner.

Set an iron post, 3 ft. long, 2' ins. diam., 24 ins. in the ground to solid rock, and in a mound of stone to top, for corner of secs. 20, 21, 28, and 29, with brass cap marked

T20S | R9W
S20 | S21

S29 | S28
1934

of stone, 3 ft. base, 3 ft. high, W. of corner. raise a mound

Land, rolling and mountainous, with general north-westerly exposure and drainage.

Soil, shallow loose sandy loam, mixed with rock and gravel; 3rd rate. Quartzite formation.

Undergrowth, sagebrush, shadscale and grass.

No timber.

Fair grazing land.

S.89°59'E., on random line, between secs. 21 and 28.

- 40.00 Set temp. $\frac{1}{4}$ sec. corner.
- 79.98 Intersect N. and S. line, 5 links N. of the corner of secs. 21, 22, 27 and 28.

Thence

N.89°57'W., on true line, between secs. 21 and 28.

Ascend gradually along steep S. slope of rolling mountainous land, through medium dense shadscale and sagebrush.

- 3.90 Head of draw, 25 feet above corner, drains S. about 2 chains distant, thence easterly; ascend abrupt rocky E. slope.
- 14.40 Main ridge, 220 feet above corner, bears N. and S.; descend abrupt broken W. slope.

SUBDIVISION OF T. 33 S., R. 9 W.

Chains

cont and

- 30.45 Draw, 385 feet below ridge, drains N.60°W.; ascend gradually over steep NE. slope.
- 35.70 Spur, 40 feet above draw, projects N.60°W.; descend abrupt W. slope.
- 39.99 On steep W. slope, 85 feet below spur.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. corner, with brass cap marked

S 21

 S 28
 1934

raise a mound of stone, 2 $\frac{1}{2}$ ft. base, 2 ft. high, N. of corner.

- 43.90 Draw, 60 feet below $\frac{1}{4}$ sec. corner, drains NW.; ascend gradual NW. slope.
- 50.60 Spur, 20 feet above draw, projects NW.; descend gradual SW. slope.
- 57.90 Draw, 95 feet below spur, drains NW.; ascend gradual NE. slope.
- 61.70 Spur, 75 feet above draw, projects N.30°W.; descend gradual NW. slope.
- 79.98 The corner of secs. 20, 21, 28, and 29, 95 feet below spur.

Land, rolling and mountainous; E. 14.40 chains, general easterly exposure and drainage; remainder of mile, general northwesterly exposure and drainage.

Soil, shallow loose sandy loam, mixed with rocks and gravel; 4th rate.

Undergrowth, sagebrush, shadscale and grass.

No timber.

Fair grazing land.

N.0°02'W., between secs. 20 and 21.

Descend gradual NW. slope of rolling valley land, through medium dense shadscale, white sage, yellow top and sagebrush.

- 15.80 Main wash, 20 links wide, 2 feet deep, in bottom of a small valley, drains N.15°E., thence along gentle E. slope.
- 16.10 Road, bears N.15°E. and S.15°W.
- 25.40 Same wash as at 15.80 chains, 10 links wide, 5 feet deep, drains N.15°W., thence along gentle W. slope.
- 26.00 Wash, 10 links wide, 3 feet deep, drains W., about 50 links distant to main wash.
- 32.90 Main wash, 20 links wide, 3 feet deep, drains N.30°E.; ascend gradual SE. slope.

SUBDIVISION OF T. 20 S., R. 9 W.

Chains

39.20 Top of spur, 20 feet high, projects E. about 2.50 chains to end; descend gradual NE. slope.

40.00 On gradual NE. slope, 5 feet below top of spur.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. corner, with brass cap marked



raise a mound of stone, 3 ft. base, 3 ft. high, W. of corner.

41.80 Bend in road, bears N.10°E. and S.10°E.


50.60 Same road, bears N.10°W. and S.10°E.

74.90 Main wash, 1.00 chain wide, 10 feet deep, in draw, 95 feet below $\frac{1}{4}$ sec. corner, drains N.15°W., thence over gentle W. slope.

78.60 Recross same wash, drains N.15°E., thence over E. slope.

80.00 On gentle E. slope, 85 feet below $\frac{1}{4}$ sec. corner.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for corner of secs. 16, 17, 20, and 21, with brass cap marked



raise a mound of stone, 3 ft. base, 3 ft. high, W. of corner.

Land, rolling valley, with general northerly exposure and drainage.

Soil, deep sandy loam, mixed with rocks and gravel; 3rd rate. Quartzite formation.

Undergrowth, shadscale, white sage, yellow top and sagebrush.

No timber.

Fair grazing land.

S.89°57'E., on a random line, between secs. 16 and 21.

40.00 Set temp. $\frac{1}{4}$ sec. corner.

80.02 Intersect N. and S. line, 5 links S. of corner of secs. 15, 16, 21, and 22.

Thence

N.89°59'W., on true line, between secs. 16 and 21.

Ascend gradually along steep N. slope, of rolling mountainous land, through medium dense shadscale, yellow top and sagebrush.

SUBDIVISION OF T. 35 S., R. 9 W.

Chains

angle

- 9.70 Draw, 45 feet above corner, chains NW; descend abrupt E. slope.
- 16.60 Ascent becomes gradual over steep SE. slope, bears NW. and SE.
- 20.80 Main ridge, 260 feet above draw, bears S. 30° E., and N. 30° E., about 7 chains distant, thence NW.; descend gradually over steep NW. slope.
- 37.10 Descent becomes more abrupt over steep NW. slope, bears N. 30° W., and S. 30° E.
- 40.01 On steep NW. slope, 95 feet below ridge.

Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground to solid rock, with a quartzite stone, 8x6x6 ins., marked X, deposited at base, and in a mound of stone to top, for $\frac{1}{4}$ sec. corner, with brass cap marked

$\frac{1}{4}$ — S 16
 S 21
 1934

- 50.60 Base of abrupt descent, bears N. and S.; descend gradual NW. slope of valley.
- 79.30 Main wash, 30 links wide, 20 feet deep, in draw, 325 feet below $\frac{1}{4}$ sec. corner, drains N. 15° E.; ascend gradual E. slope.
- 80.02 The corner of secs. 16, 17, 20, and 21, 35 feet above bottom of wash.

Land, broken and mountainous on E. 50.60 chains.; remainder of mile, rolling valley land; east 20.80 chains, has general northeasterly exposure and drainage; remainder of mile, general northwesterly exposure and drainage.

Soil, E. 50.60 chains, shallow sandy loam, mixed with rock and gravel, 4th rate; remainder of mile, deep sandy loam, mixed with rock and gravel, 3rd rate.

Undergrowth, shadscale, yellow top and sagebrush.

No timber.

Fair grazing ground.

N. 0° 02' W., between secs. 16 and 17.

Descend gradual N. slope of rolling land, through dense shadscale, scattered yellow top, bud, white sage, and sagebrush undergrowth.

- 40.00 On gentle rolling N. slope, 85 feet below sec. corner.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. corner, with brass cap marked

$\frac{1}{4}$
 S 17 S 16
 1934

raise a mound

SUBDIVISION OF T. 20 S., R. 9 W.

Chains


of stone, 3 ft. base, 3 ft. high, W. of corner.

63.20 Road, bears NE. and SW.

75.00 Low rise, 10 feet high, bears NW. and SE.

80.00 On gradual N. slope, 15 feet below $\frac{1}{4}$ sec. corner.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, with a quartzite stone, 16x10x8 ins., marked with 4 grooves each on E. and S. faces, deposited at the base, and in a mound of stone, for corner of secs. 8, 9, 16, and 17, with brass cap marked



of stone, 2 $\frac{1}{2}$ ft. base, 2 ft. high, W. of corner. raise a mound

Land, gently rolling valley, with general northerly exposure and drainage.

Soil, deep sandy loam, with scattered patches of rocks and gravel; 3rd rate. Quartzite formation.

Undergrowth, shadscale, yellow top, bud, and white sage, and sagebrush.

No timber.

Good grazing land.

S.89°59'E., on a random line, between secs. 9 and 16.

40.00 Set temp. $\frac{1}{4}$ sec. corner.

79.98 Intersect the corner of secs. 9, 10, 15, and 16.

Thence

N.89°59'W., on true line, between secs. 9 and 16.


Ascend gradual E. slope, through dense shadscale, scattered yellow top and sagebrush.

3.70 Ascend abrupt E. slope of rocky ridge, bears N.10°E. and S.10°W.

28.90 Ridge, 360 feet above corner, bears S.10°W. and N.15°E. about 50.00 chains to N. end.; descend abrupt NW. slope.

39.99 On steep rocky NW. slope, 100 ft. below ridge.

Set an iron post, 3 ft. long, 1 in. diam.; 20 ins. in the ground, to solid rock, with a quartzite stone, 10x6x6 ins., marked $\frac{1}{4}$ on one face, deposited alongside of the iron post, and in a mound of stone to top, for $\frac{1}{4}$ sec. corner, with brass cap marked




SUBDIVISION OF T. 20 S., R. 9 W.

Chains	
51.90	Descent becomes more gradual over rolling W. slope, bears S. and N.25°E.
62.60	Base of ridge, bears S. and N.25°E.; descend gradual W. slope of wide valley.
70.70	Main wash, 30 links wide, 5 feet deep, 245 feet below ridge, drains N.10°W.; ascend gradually over general N. slope.
73.80	Road, bears N.30°E. and S.30°W.
79.98	The corner of secs. 8, 9, 16, and 17, 15 feet above wash.
Land, rolling hills on E. 62.60 chains; remainder of mile, rolling valley; east 28.90 chains has general easterly exposure and drainage; remainder of mile, northwesterly exposure and drainage.	
Soil, shallow sandy loam, mixed with rock and gravel on E. 62.60 chains, 4th rate; remainder of mile, deep sandy loam, with scattered patches of rock and gravel; 3rd rate. Quartzite formation.	
Undergrowth, shadscale, yellow top and sagebrush.	
No timber.	
Fair grazing land.	
N.0°02'W., between secs. 8 and 9.	
Descend gradual N. slope of slightly rolling land, through medium dense shadscale and white sage undergrowth.	
40.00	On gentle N. slope, 50 feet below sec. corner.
Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. corner, with brass cap marked	
<p style="text-align: center;"> ↑ S8 S9 1934 </p>	
of stone, 3 ft. base, 3 ft. high, W. of corner.. raise a mound	
Deposit a quartzite stone, 16x10x8 ins., alongside of iron post, marked $\frac{1}{4}$ on one face.	
40.80	Wash, 80 links wide, 4 feet. deep, drains NE.; thence ascend gradual SE: slope over rolling land.
57.90	Wash, 15 links wide, 3 feet deep, in draw, 15 feet deep, drains N.60°E.
61.70	Road, bears N.20°E. and S.20°W.
74.80	Old road, bears W. and S.80°E., about 1.20 chains distant to junction with road, bearing N. and S.
80.00	On gentle E. slope, 20 feet above $\frac{1}{4}$ sec. corner.
Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in	

SUBDIVISION OF T. 20 S., R. 9 W.

Chains

the ground, with a quartzite stone, 16x12x10 ins., marked with 5 grooves on S. face, and 4 grooves on E. face, deposited alongside of iron post, for corner of secs. 4, 5, 8, and 9, with brass cap marked



raise a mound of stone, 4 ft. base, 3 ft. high, W. of corner.

Land, slightly rolling, with northerly and southeasterly exposure; drainage NE.

Soil, deep sandy loam, with scattered patches of rock and gravel; 3rd rate; quartzite formation.

Undergrowth, shadscale, yellow top and sagebrush.

No timber.

Good grazing land.

S.89°59'E., on a random line, between secs. 4 and 9.

40.00 Set temp. $\frac{1}{4}$ sec. corner.

79.94 Intersect N. and S. line, 2 links N. of the corner of secs. 3, 4, 9, and 10.

Thence


N.89°58'W., on true line, between secs. 4 and 9.

Over slightly rolling land, through medium dense shad-scale and sagebrush undergrowth.

30.70 Wash, 50 links wide, 3 feet deep, drains N.

39.97 On nearly level land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with a quartzite stone, 12x10x8 ins., marked $\frac{1}{4}$ on N. face, deposited alongside of the iron post, for $\frac{1}{4}$ sec. corner, with brass cap marked



raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of corner.

Ascend gradual E. slope.

44.50 Wash, 30 links wide, 3 ft. deep, drains N.20°E.

50.50 Road, bears N.10°E. and S.10°W.

76.60 Junction of roads, from S.20°E. and S.30°W., bears N.10°W.

79.94 The corner of secs. 4, 5, 8, and 9, 45 feet above $\frac{1}{4}$ sec. corner.

SUBDIVISION OF T. 20 S., R. 9 W.

Chains

201205

Land, slightly rolling, with general northeasterly exposure and drainage.

Soil, deep sandy loam, with scattered patches of rock, and gravel; 3rd rate. Quartzite formation.

Undergrowth, shadscale and sagebrush.

No timber.

Fair grazing land.

N.0°02'W., on true line, between secs. 4 and 5.

On gentle E. slope of rolling land, through medium dense shadscale and sagebrush.

8.70 Road, bears N.30°E. and S.30°W.

22.40 Road, bears N.20°W. and S.20°E.; slope changes from E. to NE., bears E. and W.

35.60 Wash, 20 links wide, 3 feet deep, drains N.70°E.

40.00 On gentle NE. slope, 10 feet below corner.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with a quartzite stone, 16x18x5 ins., marked $\frac{1}{4}$ on one face, deposited alongside of iron post, for $\frac{1}{4}$ sec. corner, with brass cap marked

S5 | S4
1934

of stones, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of corner. raise a mound

51.50 Wash, 20 links wide, 2 feet deep, drains E.; ascend gradual SE. slope.

54.50 Road, bears N.20°E. and S.10°W., at base of hills; ascend gradually over steep SE. slope.

84.43 Intersect the N. boundary of the township.

On steep SE. slope, 80 feet above wash.

Set an iron post, 3 ft. long, 2 ins. diam., 15 ins. in the ground to solid rock, with a quartzite stone, 10x10x8 ins., marked X, deposited at the base, and in a mound of stone to top, for closing corner of secs. 4 and 5, with brass cap marked

T19S R9W
S32
S5 | S4
T20S R9W
C C
1934

From this corner the corner of secs. 32 and 33, T. 19 S., R. 9 W., heretofore described, bears S.89°55'E., 2.49 chains distant.

Land, S. 54.50 chains slightly rolling, with general easterly exposure and drainage, remainder of mile,

SUBDIVISION OF T. 20 S., R. 9 W.

Chains

rolling hills, with general southeasterly exposure and drainage.

Soil, deep sandy loam, with scattered patches of rock and gravel, on S. 54.50 chains, 3rd rate; remainder of mile, shallow sandy loam, mixed with rock and gravel, 4th rate.

Undergrowth, shadscale and sagebrush.

No timber.

Fair grazing land.

From the standard corner of secs. 31 and 32, on the S. boundary of the township, heretofore described.

N.0°03'W., between secs. 31 and 32.

Over nearly level valley land, through medium dense shadscale and scattered white sage undergrowth.

35.50 Road, bears N.15°W., and S.15°E., in wash, 15 links wide, 2 feet deep, drains S.15°E.

40.00 On nearly level land.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with a quartzite stone, 8x6x4 ins., marked $\frac{1}{4}$ on one face, deposited alongside, for $\frac{1}{4}$ sec. corner, with brass cap marked




of stone, 2 $\frac{1}{2}$ ft. base, 2 ft. high, W. of corner.

67.60 Enter rolling hilly land, bears NW. and SE.; ascend gradual SW. slope.

74.40 A limestone outcrop, at top of ascent, 65 feet above $\frac{1}{4}$ sec. corner, bears SE. and N.30°W., about 3.50 chains distant; descend gradual NW. slope.

80.00 On gentle NW. slope, 20 feet below top of ascent.

Set an iron post, 3 ft. long, 2 ins. diam., over a chiseled X, on limestone surface rock, with a limestone, 12x 8x6 ins., marked with 5 grooves on E., and 1 groove on S. face, deposited alongside of iron post, in a mound of stone, 5 ft. base to top of post, for corner of secs. 29, 30, 31, and 32, with brass cap marked



Land, S. 67.60 chains, nearly level, with southerly drainage; remainder of mile, rolling hills, with general south-westerly exposure and drainage.

Soil, S. 67.60 chains, deep sandy loam, 2nd rate; remainder of mile, shallow sandy loam, mixed with rock and

SUBDIVISION OF T. 120 N. R. 9 W.

Chains

ant 510

gravel; 4th rate. Quartzite and limestone formation.
 Undergrowth, shadscale and white sage.
 No timber.
 Fair grazing land.

East, on random line, between secs. 29 and 32.

40.00 Set temp. $\frac{1}{4}$ sec. corner.

80.00 Intersect N. and S. line, 2 links N. of the corner of secs. 28, 29, 32, and 33.

Thence

N.89°59'W., on true line, between secs. 29 and 32.

Ascend over NE. slope of rolling hills, through medium dense shadscale and sagebrush.

16.00 Junction of ridges, 130 feet above corner, bears N.70°E. and S.60°E., and north about 8 chains distant, thence N.75°W.; also spur projects S.20°W.; descend abrupt W. slope.

27.60 Draw, 140 feet below ridge, heads N.15°E. about 10 chains distant, and drains S.15°W.; descend gradually over rolling S. slope.

27.70 Road, bears N.15°E. and S.25°W.

40.00 On gentle S. slope, 10 feet below draw.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with a limestone, 12x10x6 ins., marked $\frac{1}{4}$ on one face, deposited alongside of iron post, for $\frac{1}{4}$ sec. corner, with brass cap marked

S 29

S 32

1934

of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, N. of corner. raise a mound

63.80 Draw, 10 feet, deep, heads N. about 2 chains distant, drains SE.

70.00 Slope changes from S. to NW., bears S. and N.30°E.; descend gradual NW. slope.

80.00 The corner of secs. 29, 30, 31, and 32, 55 feet below $\frac{1}{4}$ sec. corner.

Land, rolling hills; E. 16 chains with northeasterly exposure and drainage; remainder of mile, southerly exposure and drainage.

Soil, shallow sandy loam, mixed with rocks and gravel; 3rd rate. Quartzite and limestone formation.

Undergrowth, shadscale, sagebrush and grass.

No timber.

Fair grazing land.

SUBDIVISION OF T. 20 S., R. 9 W.

Chains

- West, on random line, between secs. 30 and 31.
- 40.00 Set temp. $\frac{1}{4}$ sec. corner.
- 80.16 Intersect the W. boundary of the township, 5 links N. of the corner of secs. 25, 30, 31, and 36, heretofore described.
- Thence
- N.89°58'E., on true line, between secs. 30 and 31.
- Descend abrupt E. slope, of broken mountainous land, through medium dense shadscale and sagebrush.
- 11.40 Base of mountains, bears S.20°W. and N.20°E.; descend gradual rolling SE. slope.
- 27.90 Wash, 10 links wide, 8 feet deep, drains SE.
- 40.16 On gradual SE. slope, 575 feet below the section corner.
- Set an iron post, 3 ft. long, 1 in. diam., 15 ins. in the ground, to solid rock, with a quartzite stone, 14x12x10 ins., marked $\frac{1}{4}$ on one face, deposited alongside of the iron post, and in a mound of stone to top, for $\frac{1}{4}$ sec. corner, with brass cap marked,
- S 30

S 31

1934
- 65.30 Road, bears N.30°E. and S.30°W.
- 75.20 Wash, 10 links wide, 2 ft. deep, in draw, 120 feet below $\frac{1}{4}$ sec. corner, drains S.; ascend gradual NW. slope.
- 80.16 The corner of secs. 29, 30, 31, and 32, 45 feet above draw
- Land, broken and mountainous, with easterly exposure and drainage on W. 11.40 chains; remainder of mile, rolling land, with general southeasterly exposure and drainage.
- Soil, shallow sandy loam, mixed with rocks and gravel; 4 th. rate. Quartzite and limestone formation.
- Undergrowth, shadscale and sagebrush.
- No timber.
- Fair grazing land.
-
- N.0°03'W., between secs. 29 and 30.
- Descend gradual NW. slope of rolling hilly land, through medium dense shadscale and sagebrush.
- 3.30 Draw, 15 feet below corner, drains S.80°W.; ascend gradual SW. slope.
- 4.10 Road, bears S.70°E. and N.70°W.
- 7.70 Road, bears SE. and NW.

SUBDIVISION OF T. 20 S., R. 9 W.

Chains

13.60 Ridge, 20 feet above draw, bears S.70°E., and N.70°W., about 5 chains distant, thence N.20°W.; descend gradual NE. slope.

20.30 Main road, bears N.30°E. and S.30°W., at head of draw, 20 feet below ridge, drains N.35°E.; descend gradually over rolling E. slope.

40.00 On gentle rolling E. slope, 20 feet below head of draw.
Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with a quartzite stone, 8x6x4 ins., marked $\frac{1}{4}$ on N. face, deposited at the base, for $\frac{1}{4}$ sec. corner, with brass cap marked

$\frac{1}{4}$
 S30 | S29
 1934

raise a mound
of stone, 3 ft. base, 3 ft. high, W. of corner.

41.70 Old road, bears SW. and NE. about 5 chains distant to old road bearing N. and S.

68.50 Wash, 20 links wide, 3 ft. deep, drains N. 70°E.

80.00 On slightly rolling land, 20 feet below $\frac{1}{4}$ sec. corner.

Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, with a quartzite stone, 12x8x4 ins., marked with 5 grooves on E. and 2 grooves on S. faces, deposited alongside of iron post, for corner of secs. 19, 20, 29, and 30, with brass cap marked

T20S | R9W
 S19 | S20
 S30 | S29
 1934

raise a mound
of stone, 3 ft. base, 2 $\frac{1}{2}$ ft. high, W. of corner.

Land, slightly rolling; S. 13.60 chains, general south-westerly exposure and drainage; remainder of mile, general northeasterly exposure and drainage.

Soil, deep sandy loam, mixed with rocks and gravel; 3rd rate. Quartzite formation.

Undergrowth, shadscale and sagebrush.

No timber.

Fair grazing land.

S.89°59'E., on a random line, between secs. 20 and 29.

40.00 Set temp. $\frac{1}{4}$ sec. corner.

80.02 Intersect N. and S. line, 5 links S. of the corner of secs. 20, 21, 28, and 29.

Thence

S.89°59'W., on true line, between secs. 20 and 29.


SUBDIVISION OF T. 20 S., R. 9 W.

Chains

Descend gradual NW. slope of rolling land; through medium dense shadscale and sagebrush.

- 7.70 Road, bears N.30°E. and S.30°W., in bottom of draw, 20 feet below corner, drains N.30°E.; ascend gradual E. slope.
- 9.00 Base of hills, bears N.20°E. and S.20°W.; ascend gradual SE. slope.
- 19.80 Spur, 140 feet above draw, projects N.; descend gradual W. slope.
- 26.10 Draw, 100 feet below spur, drains S.30°W.; descend gradually over gently rolling land.
- 38.40 Wash, 15 links wide, 2 ft. deep, in draw, 35 feet below last draw, drains N.30°W., about 10 chains to junction with main draw, thence N.30°W.; descend gradual rolling general NW. slope.
- 39.50 Road, bears N.70°W. and S.70°E.
- 40.01 On gentle NW. slope, 15 feet below draw.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with a limestone, 12x6x6 ins., marked $\frac{1}{4}$ on one face, deposited alongside of iron post, for $\frac{1}{4}$ sec. corner, with brass cap marked



of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, N. of corner. raise a mound

- 57.40 Main wash, 80 links wide, 3 feet deep, drains N.30°E.
- 60.60 Road, bears N.25°E. and S.25°W.
- 76.90 Old road, bears north and south.
- 80.02 The corner of secs. 19, 20, 29, and 30, 20 feet above $\frac{1}{4}$ sec. corner.

Land, rolling hills, with general northeasterly exposure and drainage on E. 19.80 chains; remainder of mile, rolling land, with general northerly exposure and drainage.

Soil, shallow sandy loam, mixed with rocks and gravel, 3rd rate. Quartzite and limestone formation.

Undergrowth, shadscale and sagebrush.

No timber.

Fair grazing land.

S.89°58'W., on a random line, between secs. 19 and 30.

- 40.00 Set temp. $\frac{1}{4}$ sec. corner.
 - 80.34 Intersect the W. boundary of the township, 5 links N. of corner of secs. 19, 24, 25, and 30, heretofore described.
- Thence

SUBDIVISION OF T. 20 S., R. 9 W.

Chains

111810

N.89°56'E., on true line, between secs. 19 and 30.

Ascend abrupt broken W. slope of mountainous land, through medium dense shadscale and sagebrush.

1.40 Top of ridge, 30 feet above corner, bears N.20°E. and S.20°W.; descend abrupt SE. slope.

14.70 Draw, 305 feet below ridge, drains S.80°E.; ascend gradually along steep S. slope.

17.70 Top of ascent, 20 feet above draw, bears N.80°W. and S.80°E.; descend abrupt SE. slope.

35.50 Descent becomes more gradual, over rolling NE. slope, bears N. and S.

40.34 On gentle NE. slope, 315 feet below top of ascent.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with a quartzite stone, 30x10x8 ins., marked $\frac{1}{4}$ on one face, deposited alongside of iron post, for $\frac{1}{4}$ sec. corner, with brass cap marked

S 19

S 30
1934

raise a mound
of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, N. of corner.

80.34 The corner of secs. 19, 20, 29, and 30, 280 feet below $\frac{1}{4}$ sec. corner.

Land, broken, and mountainous on W. 35.50 chains; remainder of mile, rolling, general easterly exposure and drainage.

Soil, shallow sandy loam, mixed with rocks and gravel; 4th rate. Quartzite formation.

Undergrowth, shadscale and sagebrush.

No timber.

Fair grazing land.

N.0°03'W., between secs. 19 and 20.

Over gently rolling land, through medium dense shadscale and sagebrush undergrowth.

15.40 Wash, 20 links wide, 4 feet deep, drains N.70°E.

40.00 On gently rolling land, nearly level with sec. corner.

Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground, to solid rock, with a quartzite stone, 12x6x3 ins., marked $\frac{1}{4}$ on one face, deposited alongside of iron post, and in a mound of stone to top, for $\frac{1}{4}$ sec. corner, with brass cap marked

$\frac{1}{4}$
S19 | S30
1934

raise a mound

SUBDIVISION OF T. 20 S., R. 9 W.

Chains

of stone, 3 ft. base, 3 ft. high, W. of corner.

45.50 Road, bears SE. and N.70°W. about 4 chains distant, thence N.10°W.

47.60 Wash, 20 links wide, 6 feet deep, drains E. about 1½ chains, thence NE.

70.20 Road, bears W. and E. about 50 links to junction of roads from S.80°E. and NE.

71.80 Ascent becomes abrupt over steep SW. slope, bears E. and W.

80.00 On steep SW. slope, 85 feet above ¼ sec. corner.

Set an iron post, 3 ft. long, 2 ins. diam., 8 ins. in the ground to solid rock, with a quartzite stone, 12x8x4 in. ins., marked 5 grooves on E. and 3 grooves on S. face, deposited alongside of iron post, and in a mound of stone to top, for corner of secs. 17, 18, 19 and 20, with brass cap marked

T20S	R9W
S18	S17
S19	S20
1934	

Land, rolling, with general easterly exposure and drainage.

Soil, shallow sandy loam, mixed with rocks and gravel; 3rd rate. Quartzite formation.

Undergrowth, shadscale and sagebrush.

No timber.

Fair grazing land.

N.89°59'E., on a random line, between secs. 17 and 20.

40.00 Set temp. ¼ sec. corner.

80.04 Intersect N. and S. line, 2 links N. of corner of secs. 16, 17, 20, and 21.

Thence

West, on true line, between secs. 17 and 20.

Over rolling land, through medium dense shadscale and scattered sagebrush.

4.10 Road, bears N. and S.

8.90 Rise, 50 feet above corner, bears N. and S.; descend gradual W. slope.

25.35 Road, bears N.30°E. and S.30°W.

40.02 On gently rolling land, 80 feet below rise.


Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for ¼ sec. corner, with brass cap marked,

SUBDIVISION OF T. 20 S., R. 9 W.

Chains	
	<p>S 17 S 20 1954 raise a mound of stone, 2½ ft. base, 2 ft. high, N. of corner.</p>
41.00	Main wash, 40 links wide, 3 ft. deep, drains N.40°E.; ascend gradual rolling E. slope.
67.20	Road, bears NE. and SW.
68.70	Ascend abrupt E. slope, bears N. and S.
78.40	Top of ascent on S. slope of hill, 200 feet above main wash, bears N. and S.; descend gradually over steep SW. slope.
80.04	The corner of secs. 17, 18, 19, and 20, 10 feet below top of ascent.
	<p>Land, rolling hills, with general northeasterly exposure and drainage.</p> <p>Soil, shallow sandy loam, mixed with rock and gravel; 3rd. rate. Quartzite formation.</p> <p>Undergrowth, sagebrush and shadscale.</p> <p>No timber.</p> <p>Fair grazing land.</p>
	S.89°56'W., on a random line, between secs. 18 and 19.
40.00	Set temp. ½ sec. corner.
30.50	Intersect the W. boundary of the township, 2 links S. of the corner of secs. 13, 18, 19, and 24. heretofore described.
	Thence
	N.89°57'E., on true line, between secs. 18 and 19.
	Ascend gradual NW. slope of rolling land, through scattered shadscale and sagebrush.
0.80	Draw, 30 feet deep, drains N.10°W.; gradually ascend.
9.40	Draw, 20 feet deep, drains NW.
31.80	Ascent becomes abrupt, over steep rocky NW. slope of rolling mountainous land, bears N.20°E. and S.20°W.
29.20	Slope changes from steep NW. to steep N. slope, bears NW. and SE.; ascend along steep N. slope.
34.90	Top of ascent, 505 feet above sec. corner, bears N. and S.; descend gradually along steep N. slope.
40.50	At base of descent, 30 feet below top of ascent.
	Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground to solid rock, and in a mound of stone to top, with a quartzite stone, 10x8x6 ins., marked X, deposited at base of post, for 2 sec. corner, with brass cap marked

SUBDIVISION OF T. 20 S., R. 9 W.

Chains



Ascend abrupt broken N. slope.

48.10 Rocky spur, 140 feet above $\frac{1}{4}$ sec. corner, projects N.15°E.; descend abrupt rocky E. slope.

66.80 Descent becomes more gradual, bears N. and S.

73.45 Road, bears N.10°E. and S.10°W., at base of descent, 490 feet below spur; bottom of a pass in ridge, bears N. about 2.50 chains distant; ascend gradual SW. slope.

80.50 The corner of secs. 17, 18, 19, and 20, 30 feet above base of descent.

Land, rolling and mountainous; W. 48.10 chains, north-westerly exposure and drainage; remainder of mile, easterly exposure and drainage.

Soil, shallow sandy loam, mixed with rocks and gravel; 4th rate. Quartzite formation.

Undergrowth, shadscale and sagebrush.

No timber.

Fair grazing land.


N.0°03'W., between sec. 17 and 18.

Ascend steep SW. slope of rolling hilly land, through medium dense sagebrush and shadscale undergrowth.

2.50 Ridge, 25 feet above corner, bears N.20°E. and W.; descend gradually along steep broken W. slope of ridge.

40.00 On steep broken W. slope, 70 feet below ridge.

Set an iron post, 3 ft. long, 1 in. diam., 24 ins. in the ground, to solid rock and in a mound of stone to top, with a quartzite stone, 12x9x4 ins., marked $\frac{1}{4}$ on one face, deposited alongside of iron post, for $\frac{1}{4}$ sec. corner, with brass cap marked



of stone, 4 ft. base, 4 ft. high, W. of cor. raise a mound

47.80 Draw, 60 feet below $\frac{1}{4}$ sec. corner, drains N.80°W.; ascend gradually along broken W. slope.

67.40 Spur, 100 feet, above draw, projects W.; descend steep NW. slope.

76.70 Draw, 90 feet below spur, drains S.80°W.; ascend abrupt rocky SW. slope.


80.00 On steep rocky SW. slope, 55 feet above draw.

Set an iron post, 3 ft. long, 2 ins. diam., 6 ins. in the ground to solid rock, and in a mound of stone, 5 feet base to top, with a quartzite stone, 8x6x4 ins.,

SUBDIVISION OF T. 20 S., R. 9 W.

Chains

marked X, deposited at the base of post, for corner of secs. 7, 8, 17, and 18, with brass cap marked



Land, rocky hills, with general westerly exposure and drainage.

Soil, shallow sandy loam, mixed with rocks and gravel, 4th rate. Quartzite formation.

Undergrowth, sagebrush and shadscale.

No timber.

Fair grazing land.

East, on random line, between secs. 8 and 17.

40.00 Set temp. $\frac{1}{4}$ sec. corner.

80.02 Intersect N. and S. line, 2 links N. of corner of secs. 8, 9, 16, and 17.

Thence

N.89°59'W., on true line, between secs. 8 and 17.

Over slightly rolling land, through medium dense shad-scale and sagebrush.


8.60 Wash, 10 links wide, 2 feet deep, drains N.30°E.

21.00 Wash, 20 links wide, 1 ft. deep, drains N., from S.70°W., thence ascend gradual rolling E. slope.

35.00 Road, bears N.80°E. and S.80°W.

40.01 On gentle E. slope, 60 feet above sec. corner.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. corner, with brass cap marked



of stone, 4 ft. base, 3 ft. high, N. of corner. raise a mound

45.00 Base of rolling hills, bears N.10°E. and S.10°W.; ascend abrupt rocky E. slope.

55.80 Spur, 385 feet above $\frac{1}{4}$ sec. corner, projects S.80°E.; ascend along steep SE. slope.

66.50 Ridge, 135 feet above spur, bears N. and S.; descend abrupt W. slope.

73.00 Steep rocky draw, drains S.30°W. about 4.00 chains distant, thence S.70°W. descend along steep SW. slope.

SUBDIVISION OF T. 20 S., R. 9 W.

Chains

80.02 The corner of secs. 7, 8, 17, and 18, 210 feet below ridge.

Land, gently rolling on E. 45.00 chains; remainder of mile, rolling hills; east 66.50 chains has general NE. exposure and drainage; remainder of mile, westerly exposure and drainage.

Soil, E. 45 chains, deep sandy loam, mixed with gravel, 3rd rate; remainder of mile, shallow sandy loam, mixed with rocks and gravel, 4th rate. Quartzite formation.

Undergrowth, shadscale and sagebrush.

No timber.

Fair grazing land.

S.89°57'W., on a random line, between secs. 7 and 18.

40.00 Set temp. $\frac{1}{4}$ sec. corner.

80.68 Intersect the W. boundary of the township, 7 links S. of corner of secs. 7, 12, 13, and 18, heretofore described.

Thence

East, on true line, between secs. 7 and 18.

Ascend gradually over rolling land, through medium dense shadscale, sagebrush and grass.

1.30 Road, bears NE. and SW.

30.70 Spur, 165 feet above corner, projects N. about 10 chains distant to end; descend gradual E. slope.

38.80 Wash, 30 links wide, 3 feet deep, in draw, 50 feet below spur, drains N.15°W.; ascend gradual rolling NW. slope.

40.68 On gentle NW. slope, 5 ft. above draw.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. corner, with brass cap marked

S 7
—
S 18
1934

raise a mound of stone, 3 ft. base, 3 ft. high, N. of corner.

45.50 Road, bears N.15°W. and S.20°E.

48.40 Wash, 50 links wide, 3 $\frac{1}{2}$ ft. deep, drains N.

52.10 Wash, 20 links wide, 5 feet deep, drains N.15°W.; thence ascend gradual W. slope.

70.70 Base of hills, bears N. and S.; ascend abrupt SW. slope.

80.68 The corner of secs. 7, 8, 17, and 18, 295 feet above $\frac{1}{4}$ sec. corner.

Land, rolling, with general northwesterly exposure and drainage.

SUBDIVISION OF T. 20 S., R. 9 W.

Chains

Soil, shallow sandy loam, mixed with rocks and gravel; 3rd rate. Quartzite formation.

Undergrowth, shadscale, sagebrush and grass.

No timber.

Fair grazing land.

N.0°03'W., between secs. 7 and 8.

Ascend abrupt SW. slope of rolling hilly land, through medium dense shadscale and sagebrush undergrowth.

7.10 Steep rocky spur, 130 feet above corner, projects S.70°W.; descend abrupt NW. slope.

31.20 Draw, 290 feet below spur, drains N.80°W.; ascend gradually along steep broken W. slope.

40.00 On steep W. slope, 20 feet above draw.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. corner, with brass cap marked

$\frac{1}{4}$
 S7 | S8
 1934

of stone, 2 ft. base, 2 ft. high, W. of corner. raise a mound

Descend gradually along general W. slope.

80.00 On steep rocky W. slope, 75 feet below $\frac{1}{4}$ sec. corner.

Set an iron post, 3 ft. long, 2 ins. in diam., over a chiseled X, on conglomerate outcrop, in mound of stone, 6 feet base to top of post, for corner of secs. 5, 6, 7, and 8, with brass cap marked

T20S | R9W
 S6 | S5

 S7 | S8
 1934

Land, rolling hills, with general westerly exposure and drainage.

Soil, shallow sandy loam, mixed with rocks and gravel; 4th rate.

Undergrowth, shadscale and sagebrush.

No timber.

Fair grazing land.

S.89°59'E., on a random line, between secs. 5 and 8.

40.00 Set temp. $\frac{1}{4}$ sec. corner.

80.10 Intersect N. and S. line, 5 links S. of corner of secs. 4, 5, 8, and 9.

SUBDIVISION OF T. 20 S., R. 9 W.

Chains

Thence

S.89°59'W., on true line, bet. secs. 5 and 8.

Ascend gradual E. slope of rolling land, through medium dense shadscale and sagebrush undergrowth.

4.40 Road, at base of rolling hills, bears N.30°E. and S.30°W., ascend gradual E. slope.

19.00 Spur, 60 feet above corner, projects S. about 5 chains distant to end; descend gradual W. slope.

28.00 Draw, 10 feet below spur, drains S.20°E.; ascend gradual E. slope.

40.05 On gradual E. slope, 35 feet above draw.

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ sec. corner, with brass cap marked

S 5

S 8

1934

raise a mound of stone, $2\frac{1}{2}$ ft. base, 2 ft. high, N. of corner.

52.70 Ascent becomes abrupt over steep E. slope of conglomerate outcrops and small ledges.

56.50 Spur, 225 feet above $\frac{1}{4}$ sec. corner, projects S. about 8 chains distant to end; descend abrupt W. slope.

60.30 Draw, 95 feet below spur, heads N. about 6 chains distant, drains S.80°E.; ascend gradual E. slope.

71.00 Ridge, 80 feet above draw, bears S.10°W. and NE.; descend abrupt W. slope.

80.10 The corner of secs. 5, 6, 7, and 8, 160 feet below ridge.

Land, rolling hills; east 71.00 chains, general southeasterly exposure and drainage; remainder of mile, westerly exposure and drainage.

Soil, shallow sandy loam, mixed with rock and gravel, 4th rate. Quartzite and conglomerate formation.

Undergrowth, sagebrush and shadscale.

No timber.

Fair grazing land.

West, on random line, between secs. 6 and 7.

40.00 Set temp. $\frac{1}{4}$ sec. corner.

80.87 Intersect the W. boundary of the township, 2 links N. of corner of secs. 1, 6, 7, and 12, heretofore described.

Thence

N.89°59'E., on true line, between secs. 6 and 7.

Over slightly rolling land, through medium dense shad-

SUBDIVISION OF T. 20 S., R. 9 W.

Chains

scale and sagebrush undergrowth.

34.20 Wash, 10 links wide, 2 ft. deep, drains N.10°W.

40.00 Wash, 10 links wide, 2 ft. deep, drains NW.

40.87 On gently rolling land, nearly level with sec. corner.

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ sec. corner, with brass cap marked

$\frac{1}{4}$ ——— S 6
 S 7
 1934

of stone, 2 $\frac{1}{2}$ ft. base, 2 ft. high, N. of corner. raise a mound

53.65 Road, at base of hills, bears N.20°E. and SW.; ascend gradual W. slope.

74.90 Ascent becomes abrupt over steep rocky W. slope, bears N. and S.

80.87 The corner of secs. 5, 6, 7, and 8, 235 feet above $\frac{1}{4}$ sec. corner.

Land, W. 53.65 chains, slightly rolling, with general northwesterly exposure and drainage; remainder of mile, rolling hilly land, with general westerly exposure and drainage.

Soil, deep sandy loam, mixed with scattering patches of rocks and gravel, on W. 53.65 chains, 3rd rate; remainder of mile, shallow sandy loam, mixed with rocks and gravel; 4th rate. Quartzite and conglomerate formation.

Undergrowth, sagebrush and shadscale.

No timber.

Fair grazing land.

N.0°03'W., on true line, between secs. 5 and 6.

Descend gradually along steep rocky W. slope of rolling hills, through medium dense shadscale and scattered sagebrush.

25.00 Top of quartzite ledge, facing NW., 35 feet high, bears NE. and SW.

33.30 Draw, 220 feet below sec. corner, heads E. about 3.50 chains distant, drains W.; ascend gradual SW. slope.

37.40 Spur, 35 feet above draw, projects W.; descend abrupt NW. slope.

40.00 On steep NW. slope, 40 feet below spur.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. corner, with brass cap marked

$\frac{1}{4}$
 S6 | S5
 1934

Chains

raise a mound of stone, 2½ ft. base, 2 ft. high, W. of corner.

43.60

Road, at base of hills, bears N.60°E. and SW.; descend gradual rolling N. slope.

84.52

Intersect the N. boundary of the township.

On gentle NW. slope, 60 feet below ¼ sec. corner.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for closing corner of secs. 5 and 6, with brass cap marked

T19S R9W

S31

S6 | S5

T20S | R9W

C C

1934

raise a mound of stone, 2 ft. base, 1½ ft. high, S. of corner.

From this corner the corner of secs. 31 and 32, T. 19 S., R. 9 W., heretofore described, bears E., 2.23 chains distant.

Land, S. 43.60 chains, rolling hills, with general westerly exposure and drainage; remainder of mile slightly rolling, with general northwesterly exposure and drainage.

Soil, S. 43.60 chains, shallow sandy loam, mixed with rocks and gravel, 4th rate; remainder of mile, deep sandy loam, mixed with scattered patches of small rocks and gravel; 2nd rate.

Undergrowth, shadscale, sagebrush and grass.

No timber.

Fair grazing land.

GENERAL DESCRIPTION.

This fractional township is situated in the N. end of the Beaver or Cricket Mountains. The elevation ranges from about 4,700 ft. in the north portions of secs. 2 and 3, to 5,900 feet above sea level on the west boundaries of secs. 19 and 30. The township is mostly rolling mountainous and hilly land, with two main ridges extending in a northerly direction, between which is a rolling valley and bench land. The east portion of the township has a general easterly exposure and drainage, and is rolling hilly and bench land on the west side of a wide valley. The central portion of the township between the two main ridges has a general northerly exposure and drainage. Sections 31 and 32 have a general southerly exposure and drainage at the head of a wide valley. The northwest portion of the township has a northwesterly exposure and drainage into a wide valley to the west.

The formation is generally quartzite, with a small outcrop of limestone at the cor. of secs. 29, 30, 31, and

GENERAL DESCRIPTION OF T. 20 S., R. 9 W.

32. The soil in general on the mountainous and hilly areas consists of a shallow sandy loam, mixed with rock and gravel, lying on quartzite bedrock, and may be classified as 4th rate. The soil in general on the benches and in the valleys consists of a deep sandy loam, mixed with fine gravel and patches of rock, lying on a rocky subsoil and may be classified as 3rd rate. On portions of secs. 2, 3, 4, and 6, the soil is a deep sandy loam and light clay, lying on a gravelly subsoil, and may be classified as 2nd rate. The soil in general throughout the township contains little humus and supports an undergrowth of medium dense short shadscale, sagebrush, white and bud sage, weeds, and a variety of grasses. This undergrowth affords fair grazing for stock.

No timber or water was found on the township. The nearest water is located about 4 miles easterly from the NE. cor. of sec. 2 at Clear Lake, Utah.

No settlers were living on the township at the time of this survey and no land was under cultivation. Due to the arid dry character of the country it is not feasible to cultivate any of this land without the aid of irrigation. Portions of secs. 2, 3, 4, and 6, could be farmed by irrigation, but no water is available for this purpose.

The township in general is suitable for a grazing range for stock, and is being used for this purpose at the present time. The land is grazed mainly by sheep during the fall, winter, and spring months of the year when snow is available. A few head of cattle are ranged on this land all year by the settlers of Clear Lake, Utah.

Numerous unimproved roads were found throughout the township, over which stockmen haul camp equipment and supplies.

No indications of oil, oil shale, coal, or mineral were found, and no evidence of mining or prospecting was noted.

The nearest Post Office to the township is at Clear Lake, Utah, which is located about 4 miles in an easterly direction from the NE. cor. of sec. 2.

The mean magnetic declination throughout the township was found to be 16°15'E.

FIELD ASSISTANTS.

NAMES.	CAPACITY.
Diran Broun	Principal Assistant
James P. Smith	"
Gordon Britton	Chainman
George T. Holman	"
Howard Dorius	"
Leslie Blackburn	Flagman
Perris Broadhead	"
Clive Black	"
Harrison Anderson	Cornerman
Cliff Ashman	"
W. C. Allen	"
Bert Pewtrees	Axman
Murray Sturzenegger	"
Lee Carver	"
T. W. Hoka	"
Owen Humphries	"
Vesloy Vest	"
Kenneth Jack	"
Alfred Robinson	"
Stanley Cook	"
Howard Engles	"
Percy Robertshaw	"
George Irons	"
Bernerd Logan	"
Albert Miller	"
Arthur R. Palmer	"
Albert Carlison	"
Lester Neilson	"
Esra Walker	"
D. W. Duffin	"
Charles McCulley	"
Max W. Powelson	Chainman
Fred L. Gadd	"
Bert Matsen	Flagman
Robert E. Chappell	Axman
Ray R. Morgan	"
J. Kenneth Flygare	"
William A. Stanley	"
Paul R. Strehel	"
Wallace Young	"

CERTIFICATE OF UNITED STATES SURVEYOR

Andrew Nelson, U. S. Cadastral Engineer, and Harry Demarest, Edward Eliason and

We / Kenneth Vincent, Transitmen (Temporary) CWA, hereby certify upon honor that, in pursuance of special instructions received from the District Cadastral Engineer for Utah

bearing date of the 15th day of December, 1933, / have well, faithfully, and truly our

in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, surveyed all those parts or portions of Dependent resurvey of a portion of the north boundary and subdivision; independent resurvey of the fourth standard parallel south, through R. 9 W.; survey of the west boundary and a portion of the subdivision, completing the survey of T. 20 S., R. 9 W.

of the Salt Lake Meridian, in the State of Utah, which are represented in

the foregoing field notes as having been executed by us, and under our direction; and that all the corners of said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the District Cadastral Engineer for Utah

and in the specific manner described in the field notes, and that the foregoing are the original field notes of such survey.

Andrew Nelson U.S. Cadastral Engineer
Harry Demarest
Edward Eliason Transitmen (Temporary)
Kenneth Vincent U. S. Surveyor.

Certified to at Salt Lake City, Utah March 11, 1935

APPROVAL

OFFICE OF U. S. SUPERVISOR OF SURVEYS, Denver, Colo. APR 15, 19 35

The foregoing field notes of the survey of dependent resurvey of a portion of the north boundary and subdivison; independent resurvey of the fourth standard parallel south, through R. 9 W.; survey of the west boundary and a portion of the subdivison, completing the survey of T. 20 S., R. 9 W.

Andrew Nelson, U. S. Cadastral Engineer, and Harry Demarest, executed by Kenneth Vincent, and Edward Eliason, Transitmen (Temporary) CWA under his special instructions dated December 15, 19 33, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

Signature of U. S. Supervisor of Surveys

I certify that the foregoing transcript of the field notes of the above-described surveys in has been correctly copied from the original notes on file in this office.

U. S. Supervisor of Surveys

Blank

Page

Blank

Page

BOOK A-506

"C"

FIELD NOTES

OF THE SURVEY OF THE

DEPENDENT RESURVEY OF PORTION OF THE FOURTH STANDARD PARALLEL SOUTH
ALONG THE SOUTH BOUNDARY OF T. 20 S., R. 5 W., PORTION OF THE NORTH
BOUNDARY AND PORTION OF THE SUBDIVISION, AND SURVEY OF PORTION OF
THE SUBDIVISION COMPLETING THE SURVEY OF T. 20 S., R. 5 W.

Of the _____ Meridian,

In the State of _____

EXECUTED BY

Andrew Nelson, D., Cadastral Engineer

In the capacity of U. S. Surveyor, under Special Instructions dated December 15,
19 33, issued by the District Cadastral Engineer to govern surveys included in Group
No. 255, which were approved by the Commissioner of the General Land
Office, February 2, 19 34, and Assignment Instructions dated Dec. 20, 19 33.

Survey commenced February 25, 19 34

Survey completed March 15, 19 34

INDEX DIAGRAM.

Township 20 south, Range 5 west

2						
6	15	5	4	3	2	1
14						
7	13	8	9	10	11	12
12						
18	10	17	16	15	14	13
10						
19	8	20	21	22	23	24
7						
20	6	29	28	27	26	25
5						
21	4	32	33	34	35	36
1						

Copyright 1900 by the United States Government

Chains

This fractional township was surveyed in conjunction with T. 20 S., R. 6 W., and executed with Buff and Buff light mountain transit No. 16725. For complete description, tests and approval of instrument see the field notes of T. 20 S., R. 6 W., this group.

The measurements were made with a Lallie steel ribbon tape, 8 chains in length; the tape is graduated every link for the first 100 links and thereafter at intervals of 10 links. The tape was tested by comparison with a Lufkin steel standard tape, 1.00 chain in length and found correct. The measurements were made on the slope; the vertical angles were determined by clinometers in good adjustment; the horizontal equivalents are recorded in the field notes of this survey.

DEPENDENT RESURVEY OF THE FOURTH STANDARD PARALLEL SOUTH,
ALONG THE SOUTH BOUNDARY OF T. 20 S., R. 5 W.

Reestablishment of the survey executed by
Julien Bausman, Deputy U. S. Surveyor, in 1869.

From the standard cor. of Tps. 20 and 21 S., Rs. 5 and 6 W., described in the field notes of the survey of T. 20 S., R. 6 W., in approximate latitude $39^{\circ}01'$ N., longitude $112^{\circ}28'$ W. I deflect an angle of $90^{\circ}00'$ to the right from a point on the east bdy. of T. 20 S., R. 6 W.; thence

East, on a random line along the S. bdy. of sec. 31, T. 20 S., R. 5 W.

40.00 No trace of the standard $\frac{1}{4}$ sec. cor. could be found.

82.17 Fall 31 lks. N. of the standard cor. of secs. 31 and 32, hereinafter described.

The course of this mile therefore is $S. 89^{\circ}47' E.$, and the proportionate distance of each half mile is 41.085 chs.

Thence

From the standard cor. of Tps. 20 and 21 S., Rs. 5 and 6 W.

$S. 89^{\circ}47' E.$, on true line along the S. bdy. of sec. 31.

Over nearly level land, through medium dense undergrowth.

3.90 Old road, bears $N. 15^{\circ} W.$ and $S. 15^{\circ} E.$ Leave shadscale; enter barren clay flat, bears N. and S.

10.00 Three strand barbed wire fence, bears $N. 52^{\circ}15' W.$ and $S. 52^{\circ}15' E.$, about 3.50 chs. dist. to cor. of fence from S. and E.

16.30 Old road, bears NE. and SW.

41.085 Proportionate point.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, with a volcanic stone, $4 \times 4 \times 3$ ins., marked X, deposited at the base, and in a small mound of stone to top, for standard $\frac{1}{4}$ sec. cor., with brass cap marked

SC
 $\frac{1}{4}$ S31

1934

Fence bearing E. and W., bears S., 15 lks. distant.

4TH STAN. PAR. S. ALONG THE S. BDY. OF T. 20 S., R. 5 W.

Chains

- 42.25 Corner of barbed wire fence, bearing E., W., and S., bearing S. 10 lks. distant.
- 42.35 Ditch, 10 lks. wide, 4 ft. deep, drains S. 65° W., about 2.00 chs. dist. to small pond, comes from N., about 50 lks. dist. thence easterly to flowing well.
- 58.80 Four strand barbed wire fence, bears N. 85° E. and S. 85° W.
- 59.90 North edge of small pond; flowing well, bears N. about 200 chs. distant.
- 62.00 Barbed wire fence, bears S. and N. about 30 lks. dist. to corner of fence bearing E., W. and S.
- 82.17 The standard cor. of secs. 31 and 32, which is a volcanic stone, 14x10x9 ins., firmly set in the ground, marked X on top of stone, no other marks visible; unwitnessed. This stone is in the corner of a barbed wire fence bearing N. and E.

At point for cor.

Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, with the original cor. monument deposited alongside, and in a small mound of stone, for standard cor. of secs. 31 and 32, with brass cap marked

SC	
T20S	R5W
S31	S32
1934	

From this standard sec. cor. the closing cor. of secs. 5 and 6, T. 21 S., R. 5 W., bears E., 25 lks. dist., which is a volcanic stone, 18x12x2 ins., firmly set in the ground, marked C on the S. face; unwitnessed.

Land, nearly level; barren clay flat on the E. 78.30 chs.

Soil, clay loam on the W. 3.90 chs., 2nd rate; heavy, gray clay on the remainder of the mile, 2nd rate.

No timber.

Undergrowth, medium dense shadscale on the W. 3.90 chs.

Poor grazing land.

DEPENDENT RESURVEY OF THE NORTH BOUNDARY OF
T. 20 S., R. 5 W.

Reestablishment of the survey executed by
Ferdinand Dickert, Deputy U. S. Surveyor, in 1869.

From the cor. of Tps. 19 and 20 S., Rs. 5 and 6 W., described in the field notes of the survey of T. 20 S., R. 6 W., I deflect an angle of 90°00' to the left from a point on the E. bdy. of T. 20 S., R. 6 W.,

Thence

East, on a random line bet. secs. 6 and 31 along the N. bdy. of T. 20 S., R. 5 W.

DEPENDENT RESURVEY OF THE NORTH BOUNDARY OF T. 20 S., R. 5 W.

Chains

41.68 Fall 39 lks. N. of the $\frac{1}{4}$ sec. cor., hereinafter described.

The course of this half mile therefore is S. 89°28' E., and the distance is 41.68 chs.

Continue on same line, with continuous measurement.

82.16 Fall 77 lks. N. of the original cor. of secs. 5, 6, 31 and 32, hereinafter described.

The course of this half mile therefore is S. 89°28' E., and the distance is 40.48 chs.

The original cor. of secs. 5, 6, 31 and 32, is a sandstone, 14x8x4 ins., loosely set in the ground, marked 5 notches on the E. edge and 1 notch on the W. edge; unwitnessed.

At point for cor.

Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, with the original cor. monument deposited alongside, for cor. of secs. 5, 6, 31 and 32, with brass cap marked

T19S	R5W
S31	S32
S 6	S 5
T20S	
1934	

raise a mound

of stone, 4 ft. base, 3 ft. high, W. of cor.

Thence

N. 89°28' W., on true line between secs. 6 and 31.

Over nearly level land, through medium dense undergrowth.

27.70 Old road, bears N. 35° E. and S. 35° W.

40.48 The original $\frac{1}{4}$ sec. cor., which is a sandstone, 11x6x2 ins., firmly set in the ground, very dim chisel marks on the N. face; unwitnessed.

At point for cor.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, with the original cor. monument deposited alongside, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$	S31
	S 6
	1934

raise a mound

of stone, 2 $\frac{1}{2}$ ft. base, 2 ft. high, N. of cor.

Continue on same line, with continuous measurement.

44.60 Leave clay soil; enter sandy clay soil, bears N. and S.

82.16 The cor. of Tps. 19 and 20 S., Rs. 5 and 6 W.

Land, nearly level.

Soil, sandy clay loam on the E. portion of the mile, 2nd rate; sandy clay loam on the W. portion of the mile, 3rd rate.

DEPENDENT RESURVEY OF THE NORTH BOUNDARY OF T. 20 S., R. 5

Chains

No timber.
Undergrowth, medium dense shadscale and greasewood.
Fair grazing land.

DEPENDENT RESURVEY OF PORTION OF THE SUBDIVISION
OF T. 20 S., R. 5 W.

Reestablishment of the survey executed by
Ferdinand Dickert, Deputy U.S. Surveyor, in 1870.

From the standard cor. of secs. 31 and 32, on the S. bdy.
of the Tp., heretofore described.

North, on a random line between secs. 31 and 32.

40.00 No trace of the original $\frac{1}{4}$ sec. cor. could be found.

78.70 Fall 85 lks. W. of the original cor. of secs. 29, 30, 31
and 32, hereinafter described.

The course of this mile therefore is N. $0^{\circ}37'$ E., and the
proportionate distance of each half mile is 39.35 chs.

Thence

From the standard cor. of secs. 31 and 32 on S. bdy. of
the Tp.

N. $0^{\circ}37'$ E., on true line between secs. 31 and 32.

Over nearly level barren clay flat.

.25 Old fence line, bears E. and W.

.40 Ditch, 6 lks. wide, 2 ft. deep, drains W.


22.40 Barbed wire fence, bears E. and W., about 5 chs. dist.,
thence south. Leave barren land; enter medium dense shad-
scale and greasewood, bears E. and W.

28.85 Old road, bears N. 60° E. and S. 60° W.

32.00 Leave clay soil; enter sandy clay soil, and outcroppings
of volcanic rock, bears E. and W.

39.35 Proportionate point.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the
ground, for $\frac{1}{4}$ sec. cor., with brass cap marked



raise a mound

of stone, 3 ft. base, 2 ft. high, W. of cor.

45.50 Barbed wire fence, bears E. and W., about 3.00 chs. dist.,
thence NW.

61.15 Old road, bears N. 60° E. and S. 60° W.

SURVEY AND

DEPENDENT RESURVEY OF PORTION OF SUBDIVISION OF T. 20 S., R. 5 W.

Chains
70.30

Volcanic outcroppings, bears N. 60° E. and S. 60° W.; enter sagebrush.

78.70

The original cor. of secs. 29, 30, 31 and 32, which is a broken juniper post, 28 ins. long, 2 ins. square, lying on the ground, with very dim scribe marks on one side; unWitnessed.

At point for cor.

Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, with the original cor. monument set alongside, for cor. of secs. 29, 30, 31 and 32, with brass cap marked

T20S R5W	
S30	S29
S31	S32
1934	

raise a mound

of stone, 4 ft. base, 3 ft. high, W. of cor.

Land, nearly level, with numerous small sand dunes.

Soil, heavy, gray clay on the S. portion of the mile, 2nd rate; sandy clay loam, with outcroppings of volcanic rock in places on the N. portion of the mile, 3rd rate.

No timber.

Undergrowth, medium dense shadscale and greasewood on the central portion of the mile, with sagebrush on the N. 8.40 chs.

Fair grazing land.

West, between secs. 30 and 31.

Over nearly level land, through medium dense undergrowth.

17.80 Leave greasewood, bears N. and S.

30.80 Old road, bears N. 30° W. and S. 30° E.

34.90 Leave shadscale, bears N. and S.

40.00 (Record) No trace of the $\frac{1}{4}$ sec. cor. could be found.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$	S30
	S31
	1934

raise a mound

of stone, 3 ft. base, 2 ft. high, N. of cor.

ORIGINAL SURVEY

Thence from the $\frac{1}{4}$ sec. cor.

West, with continuous measurement.

DEPARTMENT OF THE INTERIOR
 SURVEY AND

DEPENDENT RESURVEY OF PORTION OF SUBDIVISION

- Chains Over gently rolling land.
- 60.00 Volcanic rock outcroppings, bears N. and S.
- 71.50 Top of rocky rise, 20 ft. above $\frac{1}{4}$ sec. cor., bears N. and S.
- 82.63 Intersect the W. bdy. of the Tp.
- Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for closing cor. of secs. 30 and 31, with brass cap marked

T20S	T20S
S36	S30 C
R6W	S31 C
	R5W

1934

raise a mound

of stone, 3 ft. base, 2 ft. high, E. of cor.

From this closing cor. the cor. of secs. 25 and 36, T. 20 S., R. 6 W., described in the field notes of the survey of T. 20 S., R. 6 W., this group, bears N. $0^{\circ}22'$ E., 1.60 chs. dist.

Land, nearly level on the E. portion of the mile, and gently rolling on the W. portion of the mile.

Soil, sandy clay loam, with outcroppings of volcanic rock on the W. portion of the mile, and with a heavy, gray clay subsoil, 3rd rate.

No timber.

Undergrowth, medium dense shadscale, greasewood and sagebrush on the E. 17.80 chs., shadscale and sagebrush on the next 17.10 chs. and medium dense sagebrush on the remainder of the mile.

Fair grazing land.

DEPENDENT RESURVEY

Reestablishment of the survey executed by Ferdinand Dickert, Deputy U. S. Surveyor, in 1870.

From the cor. of secs. 29, 30, 31 and 32.

North, between secs. 29 and 30.

40.00 No trace of the original $\frac{1}{4}$ sec. cor. could be found.

80.24 Fall 65 lks. E. of the cor. of secs. 19, 20, 29, and 30, hereinafter described.

The course of this mile therefore is N. $0^{\circ}28'$ W., and the proportionate distance of each half mile is 40.12 chs.

Thence

From the cor. of secs. 29, 30, 31 and 32.

N. $0^{\circ}28'$ W., on true line between secs. 29 and 30.

SURVEY AND

INDEPENDENT RESURVEY OF PORTION OF SUBDIVISION OF T. 20 S., R. 5 W.

Chains

Over gently rolling land, through medium dense undergrowth.
 Leave greasewood; enter medium dense shadscale, bears E. and W.

7.00


38.70

Old road, bears N. 60° E. and S. 60° W.

40.12

Proportionate point

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked



raise a mound

of stone, 3 ft. base, 2 ft. high, W. of cor.

41.60

Old road, bears NW. and SE. Leave sandy clay soil; enter sand, bears E. and W.

62.70

Top of rocky rise, 10 ft. above $\frac{1}{4}$ sec. cor., bears E. and W.

67.95


Old road, bears N. 65° E. and S. 65° W.

80.24

The cor. of secs. 19, 20, 29 and 30, which is a broken juniper post, 12 ins. long, 2 ins. square, lying on the ground, with very dim scribe marks on one side; unwitnessed.

At point for cor.

Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, with the original cor. post set alongside, and with a volcanic stone, 30x22x5 ins., marked 5 notches on the E. edge and 2 notches on the S. edge, deposited alongside, for cor. of secs. 19, 20, 29 and 30, with brass cap marked



raise a mound

of stone, 4 ft. base, 3 ft. high, W. of cor.

Land, gently rolling, with numerous small sand dunes.

Soil, sandy clay loam, with a heavy, gray clay subsoil, on the S. portion of the mile, 3rd rate; loose, coarse, shifting sand, with outcroppings of volcanic rock, with a heavy, gray clay subsoil, 3rd rate.

No timber.

Undergrowth, medium dense greasewood on the S. 7.00 chs., medium dense shadscale on the next 27.00 chs. and medium dense, tall sagebrush on the remainder of the mile.

Fair grazing land.

West, between secs. 19 and 30.

SURVEY AND

DEPENDENT RESURVEY OF PORTION OF SUBDIVISION OF T. 20 S., R. 6 W.

Chains Over gently rolling land, through medium dense undergrowth
 40.00 (Record) No trace of the $\frac{1}{4}$ sec. cor. could be found.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$ S19
 S30
 1934

raise a mound

of stone, 3 ft. base, 2 ft. high, N. of cor.

ORIGINAL SURVEY

Thence, from the $\frac{1}{4}$ sec. cor.

West, with continuous measurement.

81.48 Intersect the W. bdy. of the Tp.

Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for closing cor. of secs. 19 and 30, with brass cap marked

T20S T20S
 S25 | S19 C
 R6W | S30 C
 1934 R6W

raise a mound

of stone, 4 ft. base, 3 ft. high, E. of cor.

From this closing cor. the cor. of secs. 24 and 25, T. 20 S., R. 6 W., described in the field notes of the survey of T. 20 S., R. 6 W., this group, bears N. 0°22' E., 1.37 chs. dist.

Land, gently rolling with numerous small sand dunes.

Soil, loose, coarse, shifting sand, with a heavy, gray clay subsoil, 3rd rate.

No timber.

Undergrowth, medium dense, tall sagebrush.

Fair grazing land.

DEPENDENT RESURVEY

Reestablishment of the survey executed by Ferdinand Dickert, Deputy U. S. Surveyor, in 1870.

From the cor. of secs. 19, 20, 29 and 30.

North, between secs. 19 and 20.

40.00 No trace of the $\frac{1}{4}$ sec. cor. could be found.

SURVEY AND

DEPENDENT RESURVEY OF PORTION OF SUBDIVISION OF T. 20 S., R. 5 W.

Chains

80.18 Fall 75 lks. E. of the cor. of secs. 17, 18, 19 and 20, hereinafter described.

The course of this mile therefore is N. 0°32' W., and the proportionate distance of each half mile is 40.09 chs.

Thence

From the cor. of secs. 19, 20, 29 and 30.

N. 0°32' W., on true line between secs. 19 and 20.


Over gently rolling land, through medium dense undergrowth.

21.40 Outcroppings of volcanic rock; leave sand; enter sandy clay soil, bears E. and W.

24.90 Old road, bears N. 70° W. and S. 70° E.

40.09 Proportionate point.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked.



raise a mound

of stone, 3 ft. base, 2 ft. high, W. of cor.


48.00 Leave sandy clay soil; enter sand, bears E. and W.

80.18 On low rocky rise, bears N. 10° E. and S 20° E.

The cor. of secs. 17, 18, 19 and 20, which is a volcanic stone, 16x9x8 ins., loosely set in a small mound of stone, marked 5 notches on the E. edge and 3 notches on the S. edge; unwitnessed.

At point for cor.

Set an iron post, 3 ft. long, 2 ins. diam., 15 ins. in the ground to solid rock, with the original cor. monument deposited alongside, and in a mound of stone, 6 ft. base, to top, for cor. of secs. 17, 18, 19 and 20, with brass cap marked



Land, gently rolling.

Soil, loose, coarse, shifting sand, with a heavy, gray clay subsoil on the S. and N. portions, 3rd rate; sandy clay loam, with outcroppings of volcanic rock in places, and with a heavy, gray clay subsoil on the central portion, 3rd rate.

No timber.

Undergrowth, medium dense sagebrush, 3 to 5 ft. high.

Fair grazing land.

SURVEY AND
RECORDS

DEPENDENT RESURVEY OF PORTION OF SUBDIVISION OF T. 20 S., R. 6 W., T. 20 S., R. 6 W.

Chains

ORIGINAL SURVEY

antico
2100

West, between secs. 18 and 19.

Over gently rolling land, through medium dense, tall undergrowth; descend 20 ft. to $\frac{1}{4}$ sec. cor.

1.80 West base of rocky rise, bears N. and S.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$ $\frac{S18}{S19}$
1934

raise a mound

of stone, 4 ft. base, 3 ft. high, N. of cor.

41.80 Outcroppings of volcanic rock, bears N. and S.

49.80 Top of low sandy rise, 15 ft. above $\frac{1}{4}$ sec. cor., bears N. and S. 10° W.; descend 15 ft. to closing cor.

80.18 Intersect the W. bdy. of the Tp.

Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, with a volcanic stone, 13x9x5 ins., marked 3 notches on the N. and S. edges, deposited alongside, for closing cor. of secs. 18 and 19, with brass cap marked

T20S T20S
S24 | S18 C
R6W | S19 C
R5W

1934

raise a mound

of stone, 4 ft. base, 3 ft. high, E. of cor.

From this closing cor. the cor. of secs. 13 and 24, T. 20 S. R. 6 W., described in the field notes of the survey of T. 20 S., R. 6 W., this group, bears N. $0^\circ 22'$ E., 1.21 chs. dist.

Land, gently rolling.

Soil, loose, coarse, shifting sand, with outcroppings of volcanic rock in places, and with a heavy, gray clay subsoil, 3rd rate.

No timber.

Undergrowth, medium dense sagebrush, 2 to 5 ft. high.

Fair grazing land.

DEPENDENT RESURVEY

Reestablishment of the survey executed by Ferdinand Dickert, Deputy U. S. Surveyor, in 1870.

From the cor. of secs. 17, 18, 19 and 20.

SURVEY AND

RESURVEY OF PORTION OF SUBDIVISION OF T. 20S. R. 5 W.

Chains

North, between secs. 17 and 18.

40.00

No trace of the $\frac{1}{4}$ sec. cor. could be found.

81.00

Fall 12 lks. W. of the cor. of secs. 7, 8, 17, and 18, hereinafter described.

The course of this mile therefore is N. 0°05' E., and the proportionate distance of each half mile is 40.50 chs.

Thence

From the cor. of secs. 17, 18, 19 and 20.

N. 0°05' E., on true line between secs. 17 and 18.

Over gently rolling land, through medium dense, tall undergrowth; descend 20 ft. to $\frac{1}{4}$ sec. cor.

8.60

Outcroppings of volcanic rock, bears NW. and S. 15° E.

35.90

Outcroppings of volcanic rock, bears E. and W.


38.15

Old road, bears N. 60° W. and S. 60° E.

40.50

Proportionate point.

Set an iron post, 3 ft. long, 1 in. diam., 6 ins. in the ground to bedrock, with a volcanic stone, 4x4x3 ins., marked X, deposited at the base, and in a mound of stone, 5 ft. base, to top, for $\frac{1}{4}$ sec. cor., with brass cap marked



57.00

Outcroppings of volcanic rock, bears E. and W.

74.50


Enter greasewood, bears E. and W.

81.00

The cor. of secs. 7, 8, 17 and 18, which is a juniper post 2 ft. long, 3 ins. square, lying on the ground, marked 5 notches on the E. edge and 4 notches on the S. edge, S 7 on the NW. face, S 8 on the NE. face, S 17 on the SE. face, and S 18 on the SW. face; unwitnessed.

At point for cor.

Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, with the original cor. post, and a volcanic rock, 20x19x18 ins., marked with 5 notches on E. and 4 notches on S. edge, deposited alongside, for cor. of secs. 7, 8, 17 and 18 with brass cap marked



raise a mound

of stone, 4 ft. base, 3 ft. high, W. of cor.

Cor. located at SW. cor. of old fence lines bearing N. and E.

Land, gently rolling.

Soil, loose, coarse, shifting sand, with outcroppings of volcanic rock in places, and with a heavy, gray clay sub-soil, 3rd rate.

SURVEY AND

DEPENDANT RESURVEY OF PORTION OF SUBDIVISION OF T. 20 S., R. 6 W.

Chains

No timber.

Undergrowth, medium dense, tall sagebrush, with medium dense greasewood on the N. 5.50 chs.

Fair grazing land.

West, between secs. 7 and 18.

Over gently rolling land through medium dense, tall undergrowth.

33.50 Enter dense greasewood and rabbit brush, bears N. and S.

40.00 (Record) No trace of the $\frac{1}{4}$ sec. cor. could be found.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$ $\frac{S\ 7}{S18}$
1934

raise a mound

of stone, 3 ft. base, 2 ft. high, N. of cor.

ORIGINAL SURVEY

Thence from $\frac{1}{4}$ sec. cor.

West with continuous measurement.

42.00 Leave sandy loam; enter sand, bears N. and S.

66.10 Leave sand; enter sandy loam, bears N. and S.

75.30 Top of low rise, 25 ft. above $\frac{1}{4}$ sec. cor., bears N. 60° W. and S. 30° W.

79.76 Intersect the W. bdy. of the Tp.

Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for closing cor. of secs. 7 and 18, with brass cap marked

T20S T20S
S13 | S 7 C
R6W | S18 C
R5W
1934

raise a mound

of stone, 3 ft. base, 2 ft. high, E. of cor.

From this closing cor. the cor. of secs. 12 and 13, T. 20 S., R. 6 W., described in the field notes of the survey of T. 20 S., R. 6 W., this group, bears N. 0°22' E., 23 lks. dist.

Land, gently rolling.

Soil sandy loam, with a heavy, gray clay subsoil on the E. and W. portions of the mile, 3rd rate; loose, coarse, shifting sand, with a heavy, gray clay subsoil on the west central portion of the mile, 3rd rate.

SURVEY AND

DEPENDENT RESURVEY OF PORTION OF SUBDIVISION OF T. 20 S., R. 5 W.

Chains

No timber.
 Undergrowth, medium dense sagebrush, 3 to 5 ft. high, on the E. portion of the mile, dense greasewood, rabbit brush and sagebrush on the W. portion of the mile.
 Fair grazing land.

DEPENDENT RESURVEY

Reestablishment of the survey executed by Ferdinand Dickert, Deputy U.S. Surveyor, in 1870.

From the cor. of secs. 7, 8, 17 and 18.

North, between secs. 7 and 8.

40.00 No trace of the $\frac{1}{4}$ sec. cor. could be found.

81.98 Fall 43 lks. W. of the cor. of secs. 5, 6, 7 and 8, hereinafter described.

The course of this mile therefore is N. 0°18' E., and the proportionate distance of each half mile is 40.99 chs.

Thence

From the cor. of secs. 7, 8, 17, and 18.

N. 0°18' E., on true line between secs. 7 and 8.


Over gently rolling land, through medium dense, tall undergrowth.

37.20 Old road, bears NW. and SE.

38.40 Low rise, 10 ft. above sec. cor., bears NE. and SW.

40.99 Proportionate point.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked



raise a mound

of stone, 2 ft. base, 2 ft. high, W. of cor.

46.00 Leave sand and sagebrush; enter medium dense greasewood and sandy clay soil, bears E. and W.

72.00 Leave sandy clay soil and greasewood; enter sand and tall sagebrush, bears E. and W.

81.98 The cor. of secs. 5, 6, 7 and 8, which is a juniper post, 20 ins. long, 2 ins. square, lying on the ground, with very dim scribe marks on one side; unwitnessed.

At point for cor.

SURVEY AND

DEPENDENT RESURVEY OF PORTION OF SUBDIVISION OF T. 20 S., R. 5 W.

Chains

Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, with a volcanic stone 17x17x6 ins., marked 5 notches on the E. edge and 5 notches on the S. edge, with the original cor. monument deposited alongside, for cor. of secs. 5, 6, 7 and 8, with brass cap marked

T20S	R5W
S 6	S 5
S 7	S 8
1934	

raise a mound

of stone, 2 ft. base, 2 ft. high, W. of cor.

Land, gently rolling.

Soil, loose, coarse, shifting sand, with a heavy, gray clay subsoil on the S. and N. portions of the mile, 3rd rate; sandy clay loam, with a heavy, gray clay subsoil on the N. central portion of the mile, 3rd rate.

No timber.

Undergrowth, medium dense sagebrush, 2 to 5 ft. high, on the S. and N. portions of the mile, and medium dense greasewood on the north central portion of the mile.

Fair grazing land.

West, between secs. 6 and 7.

Over gently rolling land, through medium dense undergrowth

11.60 Low rise, 10 ft. above sec. cor., bears N. and S.

24.60 Leave sandy clay soil and greasewood and shadscale; enter sand and medium dense, tall sagebrush, bears N. and S.

34.80 Old road, bears N. 30° W. and S. 30° E.; leave sand and sagebrush; enter sandy clay soil and greasewood, bears N. and S.

39.80 Leave sandy clay soil and greasewood; enter sand and medium dense, tall sagebrush, bears N. and S.

40.00 (Record) No trace of the 1/4 sec. cor. could be found.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for 1/4 sec. cor., with brass cap marked

1/4	S 6
	S 7
1934	

raise a mound

of stone, 3 ft. base, 2 ft. high, N. of cor.

ORIGINAL SURVEYS

Thence from 1/4 sec. cor.

West, with continuous measurement.

46.60 Low rise, 5 ft. above 1/4 sec. cor., bears NE. and SW.


SURVEY AND

DEPENDENT RESURVEY OF PORTION OF SUBDIVISION OF T. 20 S., R. 5 W.

Chains

- 70.60 Leave sand and sagebrush; enter sandy clay loam and grease-wood and rabbit brush, bears N. and S. Old road, bears NW. and SE.
- 78.50 Old road, bears NE. and SW.
- 79.65 Intersect the W. bdy. of the Tp.

Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, with a volcanic stone, 14x10x6 ins., marked 5 notches on the S. edge and 1 notch on the N. edge, deposited alongside, and in a small mound of stone, for closing cor. of secs. 6 and 7, with brass cap marked



raise a mound

of stone, 4 ft. base, 3 ft. high, E. of cor.

From this closing cor. the cor. of secs. 1 and 12, T. 20 S., R. 6 W., described in the field notes of the survey of T. 20 S., R. 6 W., this group, bears N. 0°22' E., 1.75 chs. dist.

Land, gently rolling, with numerous sand dunes on the W. portion of the mile.

Soil, sandy clay loam, with a heavy, gray clay subsoil on portions of the mile, 3rd rate; loose, coarse, shifting sand, with a heavy, gray clay subsoil on portions of the mile, 3rd rate.

No timber.

Undergrowth, medium dense shadscale and greasewood on portions of the mile, and medium dense sagebrush, 2 to 5 ft. high, on portions of the mile.

Fair grazing land.

DEPENDENT RESURVEY

Reestablishment of the survey executed by Ferdinand Dickert, Deputy U. S. Surveyor, in 1870.

From the cor. of secs. 5, 6, 7 and 8.

North, between secs. 5 and 6.

- 41.58 Fall 37.5 lks. W. of the $\frac{1}{4}$ sec. cor., hereinafter described.

The course of this half mile therefore is N. 0°31' E., and the distance is 41.58 chs.

From the $\frac{1}{4}$ sec. cor., north with continuous measurement.

- 84.34 Fall 256.5 lks. W. of the cor. of secs. 5, 6, 31 and 32 on the N. bdy. of the Tp., heretofore described.

SURVEY AND

DEPENDENT RESURVEY OF PORTION OF SUBDIVISION INVOLVED

Chains

The course of this half mile therefore is N. 3°26' E. and the distance is 42.84 chs.

Thence

From the cor. of secs. 5, 6, 7 and 8, N. 0°31' E., on true line between secs. 5 and 6.

Over gently rolling land, through medium dense undergrowth


14.50 Low rise, 10 ft. above sec. cor., bears N. 60° E. and S. 60° W.

41.20 Leave sandy soil and sagebrush; enter clay flat and very scattered shadscale and greasewood, bears E. and W.

41.58 The 1/4 sec. cor., which is a juniper post, 24 ins. long, 2 ins. square, lying on the ground, with very dim scribe marks on one face; unwitnessed.

At point for cor.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, with the original cor. post, set alongside, for 1/4 sec. cor., with brass cap marked.



raise a mound

of stone, 3 ft. base, 2 ft. high, W. of cor.

Thence

N. 3°26' E., with continuous measurement.

55.90 Leave clay flat and shadscale and greasewood; enter sand and tall sagebrush, bears E. and W.

81.00 Leave sand; enter sandy clay soil, medium dense shadscale, greasewood, and scattered sagebrush.

84.42 The cor. of secs. 5, 6, 31 and 32, on the bdy. of the tp., heretofore described.

Land, gently rolling on the S. and N. portions of the mile nearly level clay flat on the central portion of the mile.

Soil, sandy loam, with a heavy gray clay subsoil, on the S. portion of the mile, 3rd rate; heavy, gray clay on the central portion of the mile, 2nd rate; sand and sandy clay loam, with a heavy, gray clay subsoil on the N. portion of the mile, 3rd rate.

No timber.

Undergrowth, medium dense tall sagebrush on the S. portion of the mile, very scattered shadscale and greasewood on the central portion of the mile and medium dense shadscale and greasewood, and scattered sagebrush on the N. portion of the mile.

Fair grazing land.

GENERAL DESCRIPTION

The land in fractional township 20 south, range 5 west, comprising the west range of sections, is mostly gently rolling, with the surface broken by numerous low sand dunes and volcanic outcrops; there is a barren clay flat located in the southern portion of section 31. This fractional township has an approximate elevation of 5000 ft. above sea level, and is generally exposed to the east. No definite drainage systems are in evidence in the fractional township.

The soil in the southern portion of section 31, and the east central portion of section 6 is a heavy, gray clay and may be classed as 2nd rate; the soil in the remaining portion of the fractional township is sandy clay loam and loose, coarse, shifting sand, with outcroppings of volcanic rock in places, and with a heavy, gray, clay subsoil and may be classed as 3rd rate. The soil through the township supports a medium dense growth of sagebrush, greasewood, and shadscale, with a medium dense growth of rabbit brush in places.

The fractional township in general is suitable for grazing sheep and cattle during the winter and early spring months.

There is a flowing well located near the south boundary of section 31, about 60 chs. east of the standard corner of Tps. 20 and 21 S., Rs. 5 and 6 W. There are numerous flowing wells to the east and south of this fractional township. This indicates that flowing wells may be developed in portions of this fractional township.

There is no timber in this fractional township.

No settlers were living in the township at the time of the survey.

There are numerous old roads through the fractional township, used by settlers to haul wood.

No mineral, coal, oil or oil shale was noted in the fractional township.

The mean magnetic declination is 16°15' E.

SECRET	CLASSIFICATION	This document contains information that is classified as SECRET. It is intended for the eyes of authorized personnel only. The information contained herein is the property of the United States Government and is not to be distributed, copied, or used in any manner without the express written permission of the appropriate authority. If you are not an authorized recipient, you should not disseminate this information and should report the unauthorized disclosure to the nearest security office.
--------	----------------	--

Blank

Page

FIELD ASSISTANTS.

NAMES.	CAPACITY.
Max W. Powelson	Chainman
Fred L. Gadd	Chainman
Bert Madsen	Flagman
Richard E. Severns	Flagman
Robert E Chappell	Axman
Ray R. Morgan	Axman
J. Kenneth Flygere	Axman
Paul R. Strebek	Axman
William A. Stanley	Axman
Wallace Young	Axman

CERTIFICATE OF UNITED STATES SURVEYOR

I, Andrew Nelson, U.S. Cadastral Engineer, Surveyor hereby certify upon honor that, in pursuance

of special instructions received from the District Cadastral Engineer for Utah

bearing date of the 15th day of December, 1933, I have well, faithfully, and

in my own proper person, and in strict conformity with said instructions, the Manual of Surveying In-

tions, and the laws of the United States, surveyed all those parts or portions of Dependent resurvey

of portion of the Fourth Standard Parallel South along the south

boundary of T. 20 S., R. 5 W., portion of the north boundary and

portion of the subdivision, and survey of portion of the subdivision

of T. 20 S., R. 5 W.

of the Salt Lake

Meridian, in the State of Utah, which are represented

the foregoing field notes as having been executed by me, and under my direction; and that all the corners

said survey have been established and perpetuated in strict accordance with the Manual of Surveying In-

tions, and the special written instructions of the District Cadastral Engineer for Utah

and in the specific manner described in the field notes, and that the foregoing are the original field notes

of such survey.

Certified to at

Salt Lake City, Utah

May 4, 1935

Andrew Nelson

U.S. Cadastral Engineer

U.S. Cadastral Engineer

APPROVAL

OFFICE OF U. S. SUPERVISOR OF SURVEYS,

Denver, Colorado MAY 25 1935

The foregoing field notes of the survey of Dependent resurvey of portion of the

Fourth Standard Parallel South along the south boundary of T. 20 S.

R. 5 W., portion of the north boundary and portion of the subdivision

and survey of portion of the subdivision of T. 20 S., R. 5 W., Salt

Lake Meridian,

executed by Andrew Nelson, U.S. Cadastral Engineer

under his special instructions dated December 15, 1933, having

critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys

they describe, are hereby approved.

Quentin Durbin U.S. Supervisor of Surveys

I certify that the foregoing transcript of the field notes of the above described surveys is

has been correctly copied from the original notes on file in this office.

Quentin Durbin U.S. Supervisor of Surveys

Blank

Page

Blank

Page

BOOK A-506

"D"

FIELD NOTES

OF THE SURVEY OF THE

DEPENDENT RESURVEY OF THE FOURTH STANDARD PARALLEL SOUTH,

ALONG THE SOUTH BOUNDARY OF T. 20 S., R. 6 W.,

NORTH BOUNDARY AND

PORTIONS OF THE EAST BOUNDARY OR FIRST GUIDE MERIDIAN WEST,

INDEPENDENT RESURVEY OF PORTION OF THE EAST BOUNDARY OR

FIRST GUIDE MERIDIAN WEST

AND

SURVEY OF THE WEST BOUNDARY,

AND

SUBDIVISION OF

T. 20 S., R. 6 W.

Of the SALT LAKE Meridian,

In the State of UTAH

EXECUTED BY

Andrew Nelson, U.S. Cadastral Engineer,

Sidney R. Reese, Transitman, (temporary) C.M.A.

Harry Demarest, Transitman, (temporary) C.M.A.

Under special instructions dated December 15, 1933, which provided for the surveys included under Group No. 255, bearing the approval of the Commissioner of the General Land Office under date of February 2, 1934 and assignment instructions dated December 20, 1933

Survey commenced February 23, 1934

Survey completed March 27, 1934

INDEX DIAGRAM.

Township 20 south, Range 6 west

	26	25	23	22	22	20						
32	6	81	5	69	4	60	3	50	2	41	1	18
	81	80		68		59		49				40
31	7	79	8	67	9	58	10	49	11	39	12	17
	79	78		66		57		48				39
30	18	77	17	65	16	56	15	47	14	38	18	16
	76	76		65		56		47				37
29	19	75	20	64	21	55	22	45	23	37	24	15
	74	73		63		54		45				36
28	30	72	29	62	30	53	37	44	36	35	35	14
	72	71		62		52		43				34
27	31	70	32	61	33	51	34	42	35	33	36	12
	3	3		2		2		2				2
	10	9		7		6 ⁶⁻¹⁵¹		5				3

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

All lines in black were surveyed by Andrew Nelson,
U.S. Cadastral engineer.

All lines in red were surveyed by Sidney R. Reese,
Transitman, (temporary) C.W.A.

All lines in brown were surveyed by Harry Demarest,
Transitman, (temporary) C.W.A.

Blank

Page

DESCRIPTION AND TEST OF INSTRUMENTS, T. 20 S., R. 6 W.

IS 500

DESCRIPTION AND TEST OF INSTRUMENTS

Survey commenced February 23, 1934, and executed with Buff and Buff light mountain transits Nos. 16725, 8028 and 9979, used by Andrew Nelson, U.S. Cadastral Engineer, Sidney R. Reese, and Harry Demarest, Transitmen, (temporary C.W.A. respectively. Each instrument is equipped with Smith solar attachment and full vertical circle; the horizontal limb of each transit is provided with two double verniers, placed opposite to each other and reading to single minutes of arc, which is also the least count of the verniers of the latitude and declination arcs, and vertical circles. These instruments were approved for use on this survey by the district cadastral engineer for Utah, conditional upon satisfactory field tests as stated in the assignment instructions dated December 20, 1933. The instruments were in good condition at the time of this survey and all adjustments were in good order. All azimuths in this record are referred to true meridians determined by observations made upon Polaris during the progress of the survey, and all bearings are determined by deflection angles, and the lines were carried forward by double fore and back sights.

The measurements were made with Lallie steel ribbon tapes, 5 and 8 chains in length; each tape is graduated every link for the first 100 links and thereafter at intervals of 10 links. The tapes were tested by comparison with a Lufkin steel standard tape, 1.00 chain in length, and found correct. The measurements were made on the slope; the vertical angles were determined by clinometers in good adjustment, the horizontal equivalents are recorded in the field notes of this survey.

The data furnished with the special instructions gives the approximate geographic position of the southeast corner of T. 20 S., R. 6 W. as latitude 39°01' N., longitude 112°28' W.

February 23, 1934, at the standard corner of Tps. 20/S., Rs. 5 and 6 W., in approximate latitude 39°01' N., longitude 112°28' W., at 9h 42.3m a.m. by my watch, which reads correct 105th meridian time as determined by comparison with a Western Union clock at Delta, Utah, February 22, 1934, I make an hour angle observation on Polaris, east of the meridian, two each with the telescope in direct and reversed positions, reading the horizontal deflection angle from Polaris, west to reference flag, which is a flag 1/2 mile to the west.

Watch fast of l.m.t.-----	29.8m
Local mean time of observation-----	9h 12.5m a.m.
Mean horizontal angle,-----	
Polaris to reference flag-----	91°14.2'
Azimuth of Polaris-----	1°20.4" E.
True bearing of reference flag-----	N. 89°53.8' W.

DEPENDENT RESURVEY OF THE
FOURTH STANDARD PARALLEL SOUTH, ALONG THE SOUTH BOUNDARY
OF T. 20 S., R. 6 W.

Reestablishment of the surveys executed by
Julien Bausman, Deputy U.S. Surveyor, in 1869,
and subsequently resurveyed by John W. Dougall,
U.S. Surveyor, in 1916.

Random lines

DEPENDENT RESURVEY

4TH STAN. PAR. S. ALONG THE S. BDY. OF T. 20 S., R. 6

Chains

and 21

From the standard corner of Tps. 20/S., Rs. 5 and 6 W. hereinafter described. I turn an angle of $0^{\circ}05.2'$ to the left from a flag west established by Polaris; thence

N. $89^{\circ}59'$ W., along the S. bdy. of sec. 36, T. 20 S., R. 6 W.

40.30 Fall 6 lks. S. of the standard $\frac{1}{4}$ sec. cor. of sec. 36, hereinafter described.
The course of this half mile, therefore, is N. $89^{\circ}54'$ W. and the distance is 40.30 chs.

Continue on same line, with continuous measurement.

80.60 Fall 11 lks. S. of the standard cor. of secs. 35 and 36 hereinafter described.

The course of this half mile, therefore, is N. $89^{\circ}55'$ W., and the distance is 40.30 chs.

From the standard cor. of secs. 35 and 36.

N. $89^{\circ}50'$ W., along the S. bdy. of sec. 35.

40.30 Fall 2 lks. S. of the standard $\frac{1}{4}$ sec. cor. of sec. 35, hereinafter described.

The course of this half mile, therefore, is N. $89^{\circ}57'$ W. and the distance is 40.30 chs.

Continue on same line, with continuous measurement.

80.60 Fall 3 lks. S. of the standard cor. of secs. 34 and 35, hereinafter described.

The course of this half mile, therefore, is N. $89^{\circ}54'$ W. and the distance is 40.30 chs.

From the standard cor. of secs. 34 and 35.

N. $89^{\circ}55'$ W., along the S. bdy. of sec. 34.

40.28 Fall 1 lk. N. of the standard $\frac{1}{4}$ sec. cor. of sec. 34, hereinafter described.

The course of this half mile, therefore, is N. $89^{\circ}56'$ W. and the distance is 40.28 chs.

N. $89^{\circ}50'$ W., from the standard $\frac{1}{4}$ sec. cor. of sec. 34, with continuous measurement.

80.56 Fall 9 lks. S. of the standard cor. of secs. 33 and 34, hereinafter described.

The course of this half mile, therefore, is N. $89^{\circ}42'$ W. and the distance is 40.28 chs.

From the standard cor. of secs. 33 and 34.

N. $89^{\circ}56'$ W., along the S. bdy. of sec. 33.

DEPENDENT RESURVEY

4TH STAN. PAR. S. ALONG THE S. BDY. OF T.20 S., R. 6 W.

Chains
40.28

Fall 5 lks. N. of the standard $\frac{1}{4}$ sec. cor. of sec. 33, hereinafter described.

The course of this half mile, therefore, is west, and the distance is 40.26 chs.

From the standard $\frac{1}{4}$ sec. cor. of sec. 33, N. 89°51' W., with continuous measurement.

80.48

Fall 2 lks. S. of the standard cor. of secs. 32 and 33, hereinafter described.

The course of this half mile, therefore, is N. 89°49' W., and the distance is 40.22 chs.

From the standard cor. of secs. 32 and 33.

N. 89°49' W., along the S. bdy. of sec. 32.

40.32

Intersect the standard $\frac{1}{4}$ sec. cor. of sec. 32, hereinafter described.

The course of this half mile, therefore, is N. 89°49' W., and the distance is 40.32 chs.

From the standard $\frac{1}{4}$ sec. cor. of sec. 32, N. 89°54' W., with continuous measurement.

80.60

Fall 4 lks. S. of the standard cor. of secs. 31 and 32, hereinafter described.

The course of this half mile, therefore, is N. 89°51' W., and the distance is 40.28 chs.

From the standard cor. of secs. 31 and 32.

N. 89°51' W., along the S. bdy. of sec. 31.

40.20

Fall 1 lk. S. of the standard $\frac{1}{4}$ sec. cor. of sec. 31, hereinafter described.

The course of this half mile, therefore, is N. 89°50' W., and the distance is 40.20 chs.

From the standard $\frac{1}{4}$ sec. cor. of sec. 31, N. 89°52' W., with continuous measurement.

80.51

Fall 1 lk. S. of the standard corner of Tps. 20 S., Rs. 6 and 7 W., hereinafter described.

The course of this half mile, therefore, is N. 89°51' W., and the distance is 40.31 chs.

True lines

From the standard corner of Tps. 20 and 21 S., Rs. 5 and 6 W., which is a volcanic stone, 24x10x8 ins., marked 6 notches on the N., S., and W. edges, loosely set in the ground, with a few stones around cor.

At point for cor.

Set an iron post, 3 ft. long, 3 ins. diam., 30 ins. in the ground, with the original cor. monument deposited along-

DEPENDENT RESURVEY

4TH STAN. PAR. S. ALONG THE S. BDY. OF T. 20 S. R. 6 W

Chains

side, for the standard cor. of Tps. 20 and 21 S., R. 5 and 6 W., with brass cap marked.

SC
T20S
R6W R5W
S36 | S31
S 1 | S 6
R6W R5W
T21S
1934

raise a mound of stone, 4 ft. base, 3 ft. high, S. of cor.

Thence

N. 89°54' W., along the S. bdy. of sec. 36, T. 20 S., R. 6 W.

Over nearly level land, through medium dense undergrowth.

10.00 Leave shadscale, bears N. and S.; enter medium dense tall sagebrush; ascend a gently rolling E. slope.

30.50 Ungraded road, bears N. 30° W. and S. 30° E.

40.00 On a gentle E. slope, 15 ft. above Tp. cor.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for standard $\frac{1}{4}$ sec. cor., with brass cap marked

SC
 $\frac{1}{4}$ S36
1934

raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, N. of cor.

40.30 The standard $\frac{1}{4}$ sec. cor. of sec. 36, which is an iron post 1 in. diam., 20 ins. above the ground, firmly set in the ground, and unwitnessed, with brass cap marked

SC
 $\frac{1}{4}$ S36
1916

I destroy the marks on this post and remark same A P for angle point.

Thence

N. 89° 55' W., with continuous measurement.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for standard cor. of secs. 35 and 36, with brass cap marked.

SC
T20S R6W
S35 | S36
1934

raise a mound of stone, 3 ft. base, 2 $\frac{1}{2}$ ft. high, N. of cor.

Land, nearly level on the E. 10.00 chs., and gently rolling on the remainder of the mile.

Soil, loose, dark clay loam on the E. 10.00 chs., 2nd rate; loose, coarse, shifting sand, 3rd rate. on remainder of mile

No timber.

Undergrowth, medium dense shadscale on the E. 10.00 chs., and medium dense tall sagebrush on the remainder of the mile

Fair grazing land.

DEPENDENT RESURVEY

4TH STAN. PAR. S. ALONG THE S. BDY. OF T. 20 S., R. 6 W.

Chains

N. 89°55' W., along the S. bdy. of sec. 35.
Over gently rolling land, through medium dense undergrowth.

.60 The standard cor. of secs. 35 and 36, which is an iron post, 3 ins. diam., 12 ins. above the ground, firmly set in the ground, unwitnessed, with brass cap marked

SC
T20S. R6W
S35 | S36

1934

I destroy the marks on this post and remark same A P for angle point.

Thence

N. 89°57' W., with continuous measurement.

3.86 The closing corner of secs. 1 and 2, T. 21 S., R. 6 W., which is an iron post, 2 ins. diam., 12 ins. above the ground, firmly set in the ground, unwitnessed, with brass cap marked

T20S R6W
S35

S 2 | S 1

CC

T21S

1916

21.30 East edge of basin, bears N. about 3.00 chs. distance, and S. about 3.00 chs. distance.

24.80 West edge of basin, bears N. and S.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for standard 1/4 sec. cor., with brass cap marked

SC
1/4 S35

1934

from which
A juniper, 14 ins. diam., bears N. 49°45' W., 171 lks. distance, marked S C 1/4 S 35 B T.

No other tree available.

raise a mound
of stone, 3 ft. base, 2 ft. high, N. of cor.

40.90 The standard 1/4 sec. cor. of sec. 35, which is an iron post, 1 in. diam., 12 ins. above the ground, firmly set in the ground; unwitnessed, with brass cap marked

SC
1/4 S35

1916

I destroy the marks on this post and remark same A P for angle point.

Thence

N. 89°54' W., with continuous measurement.

51.90 Top of volcanic rock outcroppings, bears N. and S.

DEPENDENT RESURVEY

4TH STAN. PAR. S. ALONG THE S. BDY. OF T. 20 S., R. 6 W.

- Chains
 54.70 Ungraded road, between Fillmore, Utah and Clear Lake, Utah, bears NW. and SE.
- 74.80 Top of black volcanic outcrop; east rim of Devils Kitchen bears NE. and SW.; descend a gradual NW. slope, 35 ft. to standard sec. cor.
- 80.00 In bottom of Devils Kitchen.
- Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for standard cor. of secs. 34 and 35, with brass cap marked

SC	
T20S	R6W
S34	S35

1934

of stone, 3 ft. base, 3 ft. high, N. of cor. raise a mound

Land, gently rolling.

Soil, loose, coarse, shifting sand, with a gray clay subsoil, and with outcroppings of black volcanic rock, 3rd rate.

Timber, a few widely scattered junipers.

Undergrowth, medium dense tall sagebrush, 4 to 5 ft. high.

Fair grazing land.

N. 89°54' W., along the S. bdy. of sec. 34.

Over gently rolling land, through medium dense tall undergrowth.

- 1.20 The original standard cor. monument of secs. 34 and 35, which is a black volcanic stone, 16x10x3 ins., marked 2 notches on the E. edge and 4 notches on the W. edge, loosely set in the ground; witnessed by a small mound of stone N. I destroy the marks on this stone and mark A P for angle point, on the N. face.

Thence

N. 89°56' W., with continuous measurement.

- 3.82 The closing cor. of secs. 2 and 3. T. 21 S., R. 6 W., which is an iron post, 2 ins. diam., 12 ins. above the ground, firmly set in the ground, and witnessed by a small mound of stone S., with brass cap marked

T20S	R6W
S34	
S 3	S 2
T21S	R6W
CC	
1916	

- 5.20 Enter tall rabbit brush; ascend 20 ft. to
- 16.00 West rim of Devils Kitchen, bears N. 60° W. and SE.; thence over gently rolling land; leave rabbit brush.

DEPENDENT RESURVEY

4TH STAN. PAR. S. ALONG THE S. BDY. OF T. 20 S., R. 6 W.

Chains
40.00

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for standard $\frac{1}{4}$ sec. cor., with brass cap marked

SC
1/4 S34
1934

raise a mound of stone, 5 ft. base, 2 ft. high, N. of cor.

41.48 The original standard $\frac{1}{4}$ sec. cor. monument of sec. 34, which is a black volcanic stone, 16x9x3 ins., marked $\frac{1}{4}$ on the N. face, loosely set in the ground; unwitnessed. I destroy the marks on this stone and mark A P on the N. face for angle point.

Thence

N. 89°42' W., with continuous measurement.

42.80 Top of low ascent, bears N. and S.; descend 30 ft. to standard sec. cor.

53.80 Old road, bears NE. and SW.; leave sagebrush and sand; enter shadscale and clay flat, bears NE. and SW.

57.50 Old road, bears N. 20° E. and S.

65.50 Top of volcanic outcrop, bears N. and S.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for standard cor. of secs. 33 and 34, with brass cap marked

SC
220 S R6 W
333 | 334

1934

raise a mound of stone, 4 ft. base, 3 ft. high, N. of cor.

Land, gently rolling on the E. 53.80 chs., and nearly level clay flat on the remainder of the mile.

Soil, loose, coarse, shifting sand, with outcrops of volcanic rock, with a heavy, gray clay subsoil, on the E. 53.80 chs., 3rd rate; heavy, gray clay, with outcrops of volcanic rock on the remainder of the mile, 2nd rate.

No timber.

Undergrowth, medium dense sagebrush, 4 to 5 ft. high on the E. 53.80 chs., with a wide patch of rabbit brush in the eastern portion, and medium dense short shadscale on the remainder of the mile.

Fair grazing Land.

N. 89°42' W., along the S. bdy. of sec. 33.

Over nearly level clay flat, through medium dense undergrowth.

1.76 The original standard cor. monument of secs. 33 and 34, which is a volcanic stone, 19x12x2 ins., marked 3 notches on the E. and W. edges, firmly set in the ground;

DEPENDENT RESURVEY

4TH STAN. PAR. S. ALONG THE S. BDY. OF T. 20 S., R. 6 W.

Chains	unwitnessed. I destroy the marks on this stone and mark AP on the N. face for angle point.																
	Thence																
	West, with continuous measurement.																
3.70	The closing corner of secs. 3 and 4, T. 21 S., R. 6 W., which is an iron post, 2 ins. diam., 10 ins. above the ground, firmly set, and witnessed by a small mound of stone S., with brass cap marked																
	<table border="0"> <tr><td>T203</td><td>R6W</td></tr> <tr><td colspan="2"><hr/></td></tr> <tr><td colspan="2">S33</td></tr> <tr><td colspan="2"><hr/></td></tr> <tr><td>S 4</td><td>S 3</td></tr> <tr><td colspan="2">CC</td></tr> <tr><td colspan="2">T213</td></tr> <tr><td colspan="2">1916</td></tr> </table>	T203	R6W	<hr/>		S33		<hr/>		S 4	S 3	CC		T213		1916	
T203	R6W																
<hr/>																	
S33																	
<hr/>																	
S 4	S 3																
CC																	
T213																	
1916																	
10.80	Leave clay flat, bears NE. and SW.; ascend a gently rolling E. slope. Enter scattered junipers, bears NE. and SW.																
25.80	Enter outcrops of volcanic surface rock, bears N. and S.																
32.30	Leave outcrops of volcanic surface rock, bears N. and S.; enter small basin.																
36.50	Leave small basin; enter volcanic surface rock, bears N. and S.																
40.00	Set an iron post, 3 ft. long, 1 in. diam., over X cut in solid rock, and in a mound of stone, 6 ft. base, to top, for standard 1/2 sec. cor., with brass cap marked																
	<table border="0"> <tr><td>SC</td></tr> <tr><td><hr/></td></tr> <tr><td>1/2 S33</td></tr> <tr><td><hr/></td></tr> <tr><td>1934</td></tr> </table>	SC	<hr/>	1/2 S33	<hr/>	1934											
SC																	
<hr/>																	
1/2 S33																	
<hr/>																	
1934																	
	A juniper, 12 ins. diam., bears N. 64°30' E., 77 lks. dist., marked S C 1/2 S 33 B T. from which																
	A juniper, 12 ins. diam., bears N. 65° W., 245 lks. dist., marked S C 1/2 S 33 B T.																
42.02	The original standard 1/2 sec. cor. monument of sec. 33, which is a volcanic stone, 20x14x11 ins., marked 1/2 on one face, lying on surface rock; unwitnessed. I destroy the marks on this stone and mark AP on one face, for angle point.																
	Thence																
	N. 89°49' W., with continuous measurement.																
48.60	Leave volcanic surface rock; enter clay soil, bears N. and S.																
57.20	Top of low ascent, 15 ft. above 1/2 sec. cor., bears N. and S.; leave clay soil; enter sand. Enter medium dense sagebrush, bears N. and S.																
76.20	Outcrop of volcanic rock, bears N. and S.																
80.00	Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for standard cor. of secs. 32 and 33, with brass cap marked																

DEPARTMENT RESURVEY

SEC. 32, PAR. 8, ALONG THE S. BDY. OF T. 20 S., R. 6 W.

SC
T20S R6W
332 | 333

1934

raise a mound of stone, 4 ft. base, 3 ft. high, N. of cor.

Land, nearly level clay flat on the E. 10.80 chs., and gently rolling on the remainder of the mile.

Soil, heavy, gray clay on the E. 10.80 chs., 2nd rate; very shallow loose, coarse sand, with outcrops of volcanic surface rock on the next 37.50 chs., 4th rate; sandy and clay loam, with outcrops of volcanic rock in places on the remainder of the mile, 3rd rate.

Timber, very scattered juniper on the E. 69.00 chs.

Undergrowth, medium dense short shadeleaf on the E. 57.20 chs., and medium dense tall sawbrush on the remainder of the mile.

Pair grazing land.

W. 80°40' E., along the S. bdy. of sec. 32.

Over gently rolling land, through scattered timber and medium dense undergrowth.

2.24 The original standard cor. monument of sec. 32 and 33, which is a volcanic stone, 20x11x5 ins., marked with notches on the E. edge and 2 notches on the N. edge loosely set in the ground; witnessed by a small mound of stone. Destroy the marks on this stone and mark AP on the N. face for angle point. Ascend 20 ft. to standard sec. cor.

3.76 The closing corner of sec. 4 and 5, T. 21 S., R. 6 W., which is an iron post, 2 ins. diam., 8 ins. above the ground, firmly set in the ground, and witnessed by a small mound of stone S., with brass cap marked

T20S R6W
332
S 5 | S 4
CC
T21S
1916

15.20 Old road, bears N. and S. 10° E.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for standard 1/4 sec. cor., with brass cap marked

80
332
1934

raise a mound of stone, 3 ft. base, 2 1/2 ft. high, N. of cor.

42.56 The original standard 1/4 sec. cor. monument of sec. 32, which is a volcanic stone, 24x8x6 ins., marked 1/4 on the N. face, loosely set in the ground; unwitnessed. Destroy the marks on this stone and mark AP on the N. face, for angle point.

DEPENDENT RESURVEY

4TH STAN. PAR. S: ALONG THE S. BDY. OF T. 20 S., R. 6 W.

Chains

Thence

N. 89°51' W., with continuous measurement.

59.60 Outcrop of volcanic rock, bears N. 60° E. and S. 60° W.

69.00 Old road, bears N. 60° E. and S. 60° W.

77.40 Old road, bears N. 60° W. and S. 70° E., approximately 2.00 chs. distance to junction with old road bearing N. 60° E. and S. 60° W.; leave sagebrush; enter shadscale bears N. and S.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for standard cor. of secs. 31 and 32, with brass cap marked

SC	
T20S	R6W
S31	S32

1934

of stone, 3 ft. base, 2 ft. high, N. of cor. raise a mound

Land, gently rolling.

Soil, sandy and clay loam, with heavy, gray clay in places, and with outcrops of volcanic rock in places, 3rd rate.

Timber, very scattered juniper.

Undergrowth, medium dense sagebrush on the E. 77.40 chs. and short shadscale on the remainder of the mile.

Fair grazing land.

N. 89°51' W., along the S. bdy. of sec. 31.

Over gently rolling land, through very scattered timber, and medium dense undergrowth.

2.84 The original standard cor. monument of secs. 31 and 32, which is a volcanic stone, 16x10x3 ins., marked 1 notch on the W. edge and 5 notches on the E. edge, loosely set in the ground and in a small mound of stone. I destroy the marks on this stone and mark AP on the N. face, for angle point.

Thence

N. 89°50' W., with continuous measurement.

3.61 The closing corner of secs. 5 and 6, T. 21 S., R. 6 W., which is an iron post, 2 ins. diam., 10 ins. above the ground, and witnessed by a small mound of stone S., with brass cap marked

T20S	R6W
S31	

S 6	S5
-----	----

CC

T21S

1916

DEPENDENT RESURVEY

4TH STAN. PAR. S. ALONG THE S. BDY. OF T. 20 S., R. 6 W.

Chains

- 16.80 Leave clay soil and shadscale; enter sand and sagebrush, bears N. and S.
- 38.20 Leave sand and sagebrush; enter clay soil and shadscale, bears N. and S.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for standard $\frac{1}{2}$ sec. cor., with brass cap marked

SC
 $\frac{1}{2}$ S31

1934

raise a mound
of stone, 2 $\frac{1}{2}$ ft. base, 2 ft. high, N. of cor.

- 43.04 The original standard $\frac{1}{2}$ sec. cor. monument of sec. 31, which is a volcanic stone, 20x14x7 ins., marked $\frac{1}{2}$ on the N. face, loosely set in the ground; unwitnessed. I destroy the marks on this stone and mark AP on the N. face for angle point.

Thence

N. 89°51' W., with continuous measurement.

- 46.50 Leave clay soil and shadscale; enter sand and sagebrush, bears N. and S.

- 83.35 The original standard corner monument of Tp. 20 S., Rs. 6 and 7 W., which is a volcanic stone, 22x9x4 ins., marked 6 notches on the E. edge, loosely set in the ground; unwitnessed.

At point for cor.

Set an iron post, 3 ft. long, 3 ins. diam., 15 ins. in the ground to solid rock, and in a mound of stone, 6 ft. base, to top, for standard corner of Tp. 20 S., Rs. 6 and 7 W., with brass cap marked.

SC
T20S
R7W | R6W
336 | S31

1934

raise a mound
of stone, 3 ft. base, 3 ft. high, N. of cor.

Land, gently rolling.

Soil, heavy, gray clay on the eastern and central portions of the mile, 2nd rate; loose, coarse, shifting sand, with a heavy, gray clay subsoil, and with outcrops of volcanic rock in places on the remaining portions of the mile, 3rd rate.

Timber, very scattered juniper.

Undergrowth, medium dense shadscale on the eastern and central portions of the mile, and short sagebrush on the remaining portions of the mile.

Fair grazing land.

RESURVEY OF THE EAST BOUNDARY OF T. 20 S., R. 6 W
OR

FIRST GUIDE MERIDIAN WEST

Chains

Random Lines

- From the standard corner of Tps. 20 and 21 S., Rs. 5 and 6 heretofore described.
- North, between secs. 31 and 36.
- 40.53 Fall 15 lks. W. of $\frac{1}{2}$ sec. cor., hereinafter described.
- The bearing of this half mile, therefore, is N. $0^{\circ}13'$ E. and the distance is 40.53 chs.
- Continue on same line, with continuous measurement.
- 80.53 No trace of the cor. of secs. 25, 30, 31 and 36 can be found; therefore, I continue my line north with continuous measurement, making searches at intervals of 40.00 chs. for $\frac{1}{2}$ sec. and sec. cors., and at
- 446.11 Fall 274 lks. W. of the $\frac{1}{2}$ sec. cor. between secs. 1 and 6, hereinafter described.
- The bearing of the line connecting the $\frac{1}{2}$ sec. cor. between secs. 31 and 36, and the $\frac{1}{2}$ sec. cor. between secs. 1 and 6, therefore, is N. $0^{\circ}22'$ E., and the distance is 405.58 chs.
- From the $\frac{1}{2}$ sec. cor. between secs. 1 and 6.
- North.
- 40.71 Fall 15 lks. W. of the cor. of Tps. 19 and 20 S., Rs. 5 and 6 W., hereinafter described.
- The bearing of this half mile, therefore, is N. $0^{\circ}11'$ E. and the distance is 40.71 chs.

True Lines

- Subdivisions in T. 20 S., R. 5 W. are dependent upon the S. half mile between secs. 31 and 36, and the W. half mile, between secs. 1 and 6, therefore, a dependent resurvey is made of these half miles. No subdivisions are dependent upon the remaining portions of the boundary, and it is superseded by an independent resurvey.
- Dependent resurvey of a portion of the east boundary of T. 20 S., R. 6 W., or First Guide Meridian West.
- Reestablishment of the survey executed by Julien Bausman, Deputy U.S. Surveyor, in 1869.
- From the standard corner of Tps. 20 and 21 S., Rs. 5 and 6 W.
- N. $0^{\circ}13'$ E., along the E. bdy. of sec. 36, T. 20 S., R. 6 W.
- Over nearly level land, through medium dense undergrowth.
- 7.70 Old road, bears N. 30° W. and S. 40° E.
- 8.00 A three strand barbed wire fence, bears S. $52^{\circ}15'$ E. and N. $52^{\circ}15'$ W., 55 lks. distant, thence N. $5^{\circ}30'$ W. Leave clay soil and shadscale; enter tall sagebrush and sand, bears E. and W.
- 14.00 Leave undergrowth; enter barren clay flat, bears E. and W.

RESURVEY OF THE EAST BOUNDARY OF T. 20 S., R. 6 W.
OR
FIRST GUIDE MERIDIAN WEST

- Chains
28.00 Leave barren clay flat; enter sand and sagebrush, bears E. and W.
34.00 A three-strand-barbed wire fence, bears N. 51°15' E. and S. 51°15' W., approximately 3.00 chs. distant to fence from S. 5°30' E.
34.20 Old road, bears N. 51°15' E. and S. 51°15' W.
40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for sec. cor. of sec. 36 only, with brass cap marked

S36

1934

raise a mound of stone, 2½ ft. base, 2 ft. high, W. of cor.

- 40.53 The original ¼ sec. cor. monument of secs. 31 and 36, which is a black volcanic stone, 13x10x6 ins., marked ¼ on the W. face, loosely set in the ground; unwitnessed. This cor. now refers to sec. 31 only.

At point for cor.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, with the original cor. monument deposited alongside, for ¼ sec. cor. of sec. 31 only, with brass cap marked

S31

1934

raise a mound of stone, 2½ ft. base, 2 ft. high, E. of cor.

INDEPENDENT RESURVEY OF PORTION OF THE EAST BOUNDARY, SUPERSADING THE SURVEY EXECUTED BY Julian Pausman, Deputy U.S. Surveyor, in 1869.

N. 0°22' E., with continuous measurement.

- 57.50 Outcropping of volcanic rock, bears N. 60° W., 2.00 chs. distant and S. 60° E., about 3.00 chs. distant, thence southerly.
78.40 The closing corner of secs. 30 and 31, T. 20 S., R. 5 W., which is an iron post, 2 ins. diam., properly marked, set and witnessed as described in the field notes of the survey of T. 20 S., R. 5 W.
80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, with a volcanic stone, 13x8x6 ins., marked 5 notches on the N. edge and 1 notch on the S. edge, deposited alongside, for cor. of secs. 25 and 36, with brass cap marked

T20S T20S
S25 S30
S36 R5W
R6W

1934

RESURVEY OF THE EAST BOUNDARY OF T. 20 S., R. 6 W.
OR

FIRST GUIDE MERIDIAN WEST

Chains

of stone, 5 ft. base, 4 ft. high, W. of cor. raise a mound

Land, nearly level on the S. 28.00 chs., and gently rolling on the remainder of the mile.

Soil, dark clay loam on the S. 28.00 chs., with a narrow strip of sand on the South central portion, 2nd rate; loose, coarse, shifting sand, with a heavy, gray clay subsoil, and outcroppings of volcanic stone in places, 3rd rate.

No timber.

Undergrowth, medium dense shadscale on the S. 8.00 chs., and medium dense tall sagebrush on the next 6.00 chs., and on the N. 52.00 chs.

Fair grazing land.

N. 0°22' E., along the E. bdy. of sec. 25.

Over gently rolling land, through medium dense undergrowth; ascend 20 ft. to $\frac{1}{4}$ sec. cor.

12.00 Outcropping of volcanic rock, bears E. and W.

14.00 Enter sagebrush 4 to 5 ft. high.

38.515 Mid-point between the closing cors. of secs. 19 and 30, and secs. 30 and 31, T. 20 S., R. 5 W.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor. of sec. 30 only, with brass cap marked

S30

1934

of stone, 3 ft. base, 2 ft. high, E. of cor. raise a mound

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor. of sec. 25 only, with brass cap marked

S25

1934

of stone, 3 ft. base, 2 ft. high, W. of cor. raise a mound

43.10 Old road, bears N. 80° E. and W.

45.60 West edge of volcanic outcropping, bears N. 80° E.

78.63 The closing corner of secs. 19 and 30, T. 20 S., R. 5 W., which is an iron post, 2 ins. diam., properly set, marked and witnessed as described in the field notes of the survey of T. 20 S., R. 5 W.

RESURVEY OF THE EAST BOUNDARY OF T. 20 S., R. 6 W.
OR
FIRST GUIDE MERIDIAN WEST

Chains
80.00
27.00
33.00
38.71
40.00
50.70

Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, with a volcanic stone, 16x13x8 ins., marked 4 notches on the N. edge and 2 notches on the S. edge, deposited alongside, for cor. of secs. 24. and 25 only, with brass cap marked

T20S	T20S
S24	S19
S25	R5W
R6W	
1934	

raise a mound of stone, 5 ft. base, 4 ft. high, W. of cor.

Land, gently rolling, with numerous sand dunes.

Soil, loose, coarse, shifting sand, with outcroppings of volcanic rock in places, and with a heavy, gray clay subsoil, 3rd rate.

Timber, a few widely scattered juniper.

Undergrowth, medium dense sagebrush, 2 to 5 ft. high.

Fair grazing land.

N. 0°22' E., along the E. bdy. of sec. 24.

Over gently rolling land, through medium dense undergrowth.

Enter small rocks on the surface, bears E. and W.

Leave small rocks, bears E. and W.

Mid-point between the closing cors. of secs. 18 and 19, and 19 and 30, T. 20 S., R. 5 W.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{2}$ sec. cor. of sec. 19 only, with brass cap marked

S19
1934

raise a mound of stone, 3 ft. base, 2 ft. high, E. of cor.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{2}$ sec. cor. of sec. 24 only, with brass cap marked

S24
1934

raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Enter scattered volcanic rock, bears E. and W.

RESURVEY OF THE EAST BOUNDARY OF T. 20 S., R. 5 W.
OR

FIRST GUIDE MERIDIAN WEST

Chains
78.79

The closing corner of secs. 18 and 19, T. 20 S., R. 5 W., which is an iron post, 2 ins. diam., properly marked, set and witnessed as described in the field notes of the survey of T. 20 S., R. 5 W.

80.00

Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, with a volcanic stone, 20x12x12 ins., marked 3 notches on the N. and S. edges, deposited alongside, for cor. of secs. 13 and 24 only, with brass cap marked

T20S	T20S
S13	S18
S24	R5W
R6W	
1934	

of stone, 3 ft. base, 2 ft. high, W. of cor. raise a mound

Land, gently rolling, with numerous sand dunes.

Soil, loose, coarse, shifting sand, with volcanic rock on the surface in places, and with a heavy, gray clay subsoil 3rd rate.

No timber.

Undergrowth, medium dense sagebrush, 2 to 5 ft. high.

Fair grazing land.

N. 0°22' E., along the E. bdy. of sec. 13.

Over gently rolling land, through medium dense undergrowth

33.40

Old road, bears N. 60° W. and S. 60° E.

39.77

Southing of 40.00 chs. from the closing cor. of secs 7 and 18, T. 20 S., R. 5 W.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, with a volcanic stone, 17x7x7 ins., marked 1 on one face, deposited alongside, and in a small mound of stone to top, for 1/4 sec. cor. of sec. 18 only, with brass cap marked

1
S18
1934

of stone, 3 ft. base, 2 ft. high, E. of cor. raise a mound

40.00

Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground to bedrock, with a volcanic stone, 9x7x4 ins., marked X, deposited alongside, and in a large mound of stone to top, for 1/4 sec. cor. of sec. 13 only, with brass cap marked

1
S13
1934

RESURVEY OF THE EAST BOUNDARY OF T. 20 S., R. 6 W.
OR
FIRST GUIDE MERIDIAN WEST

Chains

- 43.50 Old road, bears E. and W. Enter scattered volcanic rock.
54.00 Leave rocks, bears E. and W.
79.77 The closing corner of secs. 7 and 18, T. 20 S., R. 5 W., which is an iron post, 2 ins. diam., properly marked, set and witnessed as described in the field notes of the survey of T. 20 S., R. 5 W.
80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 12 and 13 only, with brass cap marked

T20S	T20S
S12	S 7
S13	R5"
R6"	
1934	

raise a mound
of stone, 3 ft. base, 2 ft. high, " of cor.

Land, gently rolling, with numerous small sand dunes.

Soil, loose, coarse, shifting sand, with a heavy, gray clay subsoil, and with volcanic rock on the surface in places, 3rd rate.

No timber.

Undergrowth, medium dense sagebrush, 3 to 5 ft. high.

Fair grazing land.

N. 0°22' E., along the E. bdy. of sec. 18.

Over gently rolling land, through medium dense undergrowth; descend 15 ft. to sec. cor.

- 32.00 Enter greasewood, bears E. and W.
40.00 Set an iron post, 3 ft. long, 1 in. diam., 8 ins. in the ground, for sec. cor. of sec. 12 only, with brass cap marked

E	
S12	

1934

raise a mound
of stone, 3 ft. base, 2 ft. high, " of cor.

- 40.76 Mid-point between the closing cors. of secs. 6 and 7, and 7 and 18, T. 20 S., R. 5 W.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for sec. cor. of sec. 7 only, with brass cap marked

S 7	
1934	

raise a mound
of stone, 2 ft. base, 2 ft. high, E. of cor.

Enter tall, dense sagebrush and rabbit brush; leave greasewood, bears E. and W.

- 50.70 Leave sagebrush, bears E. and W.; continue through medium dense rabbit brush.

RESURVEY OF THE EAST BOUNDARY OF T. 20 S., R. 6 W.

OR

FIRST GUIDE MERIDIAN WEST

- Chains
62.70 Leave rabbit brush; enter medium dense sagebrush, 4 to 5 ft. high, bears E. and W.
- 74.50 Bottom of clay basin, about 150 lks. diam.,
- 77.50 Leave sagebrush; enter medium dense greasewood, bears E. and W.; thence over nearly level land.
- 80.00 Set an iron post, 3 ft. long, 2 1/2 ins. diam., 28 ins. in the ground, with a volcanic stone, 14x10x6 ins., marked 1 notch on the N. edge and 5 notches on the S. edge, deposited alongside, for cor. of secs. 1 and 12 only, with brass cap marked

T20S	T20E
S 1	S 7
S12	R5W
R6W	
1934	

of stone, 4 ft. base, 3 ft. high, raise a mound of cor.

Land, gently rolling on the S. 77.50 chs., and nearly level on the remainder of the mile, with numerous sand dunes throughout the mile.

Soil, loose, coarse, shifting sand, with a few small clay flats, and with a heavy, gray clay subsoil, 3rd rate.

No timber.

Undergrowth, medium dense sagebrush, 2 to 6 ft. high, with a patch of greasewood in the central portion of the mile, and a patch of rabbit brush in the north central portion of the mile.

Fair grazing land.

From this sec. cor. the original cor. monument of secs. 1, 6, 7 and 12, bears N. 7°30' E., 550 lks. dist., which is a volcanic stone, 14x10x6 ins., marked 1 notch on the N. edge and 5 notches on the S. edge, loosely set in the ground; unwitnessed. I destroy all evidence of this stone. No trace of other original cors. along this bdy. S. to the 1/4 sec. cor. bet. secs. 31 and 36 could be found.

N. 0°22' E., along the E. bdy. of sec. 1.

Over gently rolling land, through medium dense undergrowth.

.40 Old road, bears N. 60° E. and S. 60° W.

1.75 The closing corner of secs. 6 and 7, T. 20 S., R. 5 W., which is an iron post, 2 ins. diam., properly marked, set and witnessed as described in the field notes of the survey of T. 20 S., R. 5 W.

13.70 Outcroppings of volcanic rock, bears E. and W.

29.70 Top of sandy hummock; leave shadscale, bears E. and W.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for 1/4 sec. cor. of sec. 1 only, with brass cap marked

1/4	
S 1	

1934

RESURVEY OF THE EAST BOUNDARY OF T. 20 S., R. 6 W.
OR
FIRST GUIDE MERIDIAN WEST

Chains

raise a mound
of stone, $2\frac{1}{2}$ ft. base, 2 ft. high, W. of cor.

46.11 The original $\frac{1}{2}$ sec. cor. monument of secs. 1 and 6, which is a volcanic stone, 14x6x4 ins., marked $\frac{1}{2}$ on the W. face, loosely set in the ground; unwitnessed. This cor. now refers to sec. 6 only.

At point for cor.

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, with the original cor. monument deposited alongside, for $\frac{1}{2}$ sec. cor. of sec. 6 only, with brass cap marked

$\frac{1}{2}$
S 6

1934

raise a mound
of stone, $2\frac{1}{2}$ ft. base, 2 ft. high, E. of cor.

Thence

DEPENDENT RESURVEY OF PORTION OF THE EAST
BOUNDARY OF T. 20 S., R. 6 W.

Reestablishment of the survey executed by
Julien Bausman, Deputy U.S. Surveyor, in 1869.

N. 0°11' E., with continuous measurement.

48.00 Enter low sand hummocks; leave greasewood, bears N. and W.

54.00 Leave sand hummocks and sagebrush; enter clay soil, and greasewood and shadscale, bears E. and W.

69.80 Old road, bears NW. and SE.

80.00 Set an iron post, 3 ft. long, 1 ins. diam., 30 ins. in the ground, for cor. of lots 1 and 8 of sec. 1, with brass cap marked

S 1 $\frac{1}{8}$

1934

raise a mound
of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

86.82 The original cor. monument of Tps. 19 and 20 S., Rs. 5 and 6 W., which is a volcanic stone, 18x8x5 ins., marked 6 notches on the S. and W. edges, loosely set in the ground; unwitnessed.

At point for cor.

Set an iron post, 3 ft. long, 3 ins. diam., 30 ins. in the ground, with the original cor. monument deposited alongside, for cor. of Tps. 19 and 20 S., Rs. 5 and 6 W., with brass cap marked

T19S
R6W R5W
S36 S31
S 1 S 6
R6W R5W

T20S
1934

RESURVEY OF THE EAST BOUNDARY OF T. 20 S., R. 6 W.

OR

FIRST GUIDE MERIDIAN WEST

Chains

of stone, 4 ft. base, 3 ft. high, S. of cor. raise a mound

Land, gently rolling, with numerous sand hummocks.

Soil, clay, with loose, coarse, shifting sand in places, 2nd rate.

No timber.

Undergrowth, medium dense shadscale and greasewood, and scattered sagebrush.

Fair grazing land.

March 1, 1934, at this Tp. cor., in approximate latitude 39°07' N., longitude 112°28' W., at 5h 49m p.m. by my watch, which reads correct 105th meridian time as determined by radio signals, I make an hour angle observation on Polaris, west of the meridian, two each with the telescope in direct and reversed positions, reading the horizontal deflection angle from Polaris west to reference flag, which is a flag about 60.00 chs. to the west:

Watch fast of l.m.t.-----	29.8m
Local mean time of observation-----	5h 19.2m p.m.
Mean horizontal angle, Polaris to reference flag-----	89°13.5'
Azimuth of Polaris-----	0°46.2' W.
True bearing of reference flag-----	N. 89°59.7' W.

DEPENDENT RESURVEY OF THE NORTH BOUNDARY OF T. 20 S., R. 6 W.

Reestablishment of the survey executed by Charles Mogo, Deputy U.S. Surveyor, in 1857.

Random Lines

From the cor. of Tps. 19 and 20 S., Rs. 5 and 6 W., heretofore described.

West, on a random line, describing the tangent, along the north boundary, making proper offsets to the north, and searches at intervals of 40.00 chs. for $\frac{1}{2}$ sec. and sec. cors., but none could be found, until at

485.18 North 156 lks. from the parallel, is the cor. of Tps. 19 and 20 S., Rs. 6 and 7 W., hereinafter described.

This falling answers to a correction of 26 lks. north per mile, counting from point of beginning, and the proportionate distance for each mile is 80.53 chs.

TRUE LINES

From the cor. of Tps. 19 and 20 S., Rs. 5 and 6 W.

N. 89°49' W., between secs. 1 and 36.

Over nearly level land, and clay soil, through medium dense undergrowth of shadscale and greasewood.

11.40 Old road, bears N. 30° W. and S. 20° E.

17.70 Leave clay soil and shadscale and greasewood; enter sand/medium dense, tall, sagebrush, bears N. and S. and

DEPENDENT RESURVEY OF THE NORTH BDY. OF T. 20 S., R. 6 W.

Chains

19.20 Leave sand and sagebrush; enter clay soil and medium dense greasewood and shadscale, bears N. and S.

38.00 Old road, bears N. 30° E. and S. 30° W.

40.265 Proportionate point.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{2}$ sec. cor. of sec. 36 only, with brass cap marked

$\frac{1}{2}$ S36
1934

of stone, 3 ft. base, 2 ft. high, N. of cor. raise a mound

42.80 Easting of 40.00 chs. from the closing cor. of secs. 1 and 2, T. 20 S., R. 6 W.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{2}$ sec. cor. of sec. 1 only, with brass cap marked

$\frac{1}{2}$ S 1
1934

of stone, 3 ft. base, 2 ft. high, S. of cor. raise a mound

45.60 Base of ascent, bears N. and SW.; thence over rolling land, broken by volcanic rock outcrops; ascend a gentle E. slope. Enter sagebrush.

66.50 Top of rocky rise, 40 ft. above base of ascent, bears NE. and SW.; descend a gentle NW. slope, 20 ft. to

80.53 Proportionate point.

Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 35 and 36 only, with brass cap marked

T19S R6W
S35 S36
S 1
T20S R6W
1934

of stone, 4 ft. base, 3 ft. high, N. of cor. raise a mound

Land, nearly level on the E. 45.60 chs., and rolling on the remainder of the mile.

Soil, clay loam, with a narrow strip of sand on the E. portion of the mile, 2nd rate; loose, coarse, shifting sand, with volcanic rock outcroppings, on the W. part of the mile, 3rd rate.
No timber.

Undergrowth, medium dense greasewood and shadscale, with a narrow strip of sagebrush on the E. portion of the mile; medium dense sagebrush, greasewood and shadscale on the W. portion of the mile.

Fair grazing land.

DEPENDENT RESURVEY OF THE NORTH BDY. OF T. 20 S., R. 6

Chains

N. 89°49' W., along the S. bdy. of sec. 35.
 Over rolling land, with volcanic outcrops, through medium dense, tall, undergrowth; ascend.

- 2.27 Point for the closing cor. of secs. 1 and 2, hereinafter described.
- 4.20 Top of ascent, 15 ft. above sec. cor., bears N. and S.; thence over gently rolling land.
- 40.265 Proportionate point.
 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor. of sec. 35 only, with brass cap marked

$\frac{1}{4}$ S35
 1934

of stone, 3 ft. base, 2 ft. high, N. of cor. raise a mound

- 42.295 Mid-point between the closing cors. of secs. 1 and 2, and 2 and 3
 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor. of sec. 2 only, with brass cap marked

$\frac{1}{4}$ S 2
 1934

of stone, 3 ft. base, 2 ft. high, S. of cor. raise a mound

- 48.20 Outcrop of volcanic rock, bears N. and S.
- 63.50 Old road, bears NE. and SW.
- 80.53 Proportionate point.
 Set an iron post, 3 ft. long, 2 ins. diam., 10 ins. in the ground to bedrock, with a volcanic stone, 4x3x3 ins., marked X, deposited at the base, and in a mound of stone, 6 ft. base, to top, for cor. of secs. 34 and 35, with brass cap marked

T19S	R6W
S34	S35
S 2	
T20S	R6W
1934	

Land, rolling and gently rolling.
 Soil, sandy and clay loam, with numerous outcroppings of volcanic rock, 3rd rate.
 No timber.
 Undergrowth, medium dense sagebrush, 2 to 3 ft. high.
 Fair grazing land.

N. 89°49' W., along the S. bdy. of sec. 34.
 Over gently rolling land, through medium dense undergrowth.

Chains

- 1.79 Point for closing con. of secs. 2 and 3, hereinafter described.
- 19.60 Outcrop of volcanic rock, bears N. and S.
- 25.60 Leave sandy soil; enter sandy clay loam, bears N. and S.
- 40.265 Proportionate point.
Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor. of sec. 34 only, with brass cap marked

1 S 34
 1934

raise a mound
of stone, 3 ft. base, 2 ft. high, N. of cor.

- 41.815 Mid-point between the closing cors. of secs. 2 and 3, and 3 and 4.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor. of sec. 3 only, with brass cap marked

1 S 3
 1934

raise a mound
of stone, 3 ft. base, 2 ft. high, S. of cor.

Leave sandy clay loam; enter sand, bears N. and S.; ascend 45 ft. to sec. cor.

- 80.53 Proportionate point.
Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 33 and 34 only, with brass cap marked

T19S	R6W
S33	S34
S 3	
T20S	R6W

 1934

raise a mound
of stone, 3 ft. base, 2 ft. high, N. of cor.

Land, gently rolling.

Soil, loose, coarse, shifting sand, with a heavy, gray clay subsoil on the eastern and western portions, 3rd rate; sandy clay loam in the east central portion, with outcroppings of volcanic rock in places throughout the mile, 3rd rate.

No timber.

Undergrowth, medium dense sagebrush.

Fair grazing land.

N. 89°49' W., along the S. bdy. of sec. 33.

Over gently rolling land, through medium dense, tall, undergrowth.

DEPENDENT RESURVEY OF THE NORTH BDY. OF T. 20 S., R. 6 W.

Chains

1.31 Point for the closing cor. of secs. 3 and 4, hereinafter described.

40.265 Proportionate point.
Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor. of sec. 33 only, with brass cap marked.

$\frac{1}{4}$ S33

1934

of stone, 3 ft. base, 2 ft. high, N. of cor. raise a mound

41.39 Mid-point between the closing cors. of secs. 3 and 4, and 4 and 5.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor. of sec. 4 only, with brass cap marked.

$\frac{1}{4}$ S 4

1934

of stone, 3 ft. base, 3 ft. high, S. of cor. raise a mound

50.70 Old road, bears W. and S.

65.60 Enter scattered junipers, bears N. and S.

69.50 Old road, bears N. 20° W. and S. 10° E.

80.53 Proportionate point.
Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 32 and 33 only, with brass cap marked.

T19S R6W
S32 | S33

S 4

T20S R6W
1934

A juniper, 6 ins. diam., bears N. 68°30' W., 220 lks. dist., marked T 19. S R 6 W S 32 B T. from which

No trees available in sec. 33

of stone, 4 ft. base, 3 ft. high, N. of cor. raise a mound

Center of windmill base, bears N. 29°45' W. on top of volcanic peak locally known as "Sugar Loaf Hill." Land, gently rolling.

Soil, loose, coarse, shifting sand, with a heavy, gray clay subsoil, 3rd rate.

Timber, scattered juniper on the W. portion of the mile.

Undergrowth, medium dense sagebrush, 2 to 4 ft. high.

Fair grazing land.

DEPENDENT RESURVEY OF THE NORTH BDY. OF T. 20 S., R. 6 W.

Chains

N. 89°49' W., along the S. bdy. of sec. 32.

Over gently rolling land, through very scattered timber, and medium dense undergrowth.

Point for the closing cor. of secs. 4 and 5, hereinafter described.

1.10 Old road, bears NW. and SE.

14.10 Top of rise, 10 ft. above sec. cor., bears NW. and SE.

21.00

31.90 Old road, bears N. 50° E. and S. 50° W. Enter scattered greasewood.

40.265 Proportionate point.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for sec. cor. of sec. 32 only, with brass cap marked

1 S32

1934

from which
A juniper, 18 ins. diam., bears N. 2°15' W., 134 lks. dist., marked 1 S 32 B T.

raise a mound
of stone, 3 ft. base, 2 ft. high, W. of cor.

Center of windmill base, bears N. 2° E., on "Sugar Loaf Hill."

40.735 Mid-point between the closing cor. of secs. 4 and 5, and the cor. of secs. 5, 6, 31 and 32.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for sec. cor. of sec. 5 only, with brass cap marked

1 S 5

1934

from which
A juniper, 6 ins. diam., bears S. 7°15' E., 169 lks. dist., marked 1 S 5 B T.

A juniper, 7 ins. diam., bears S. 22°15' W., 128 lks. dist., marked 1 S 5 B T.

raise a mound
of stone, 3 ft. base, 2 ft. high, S. of cor.

Descend gently, 35 ft. to sec. cor.

80.53 Proportionate point.

Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 5, 6, 31 and 32, with brass cap marked.

T19S R6W
S31 | S32

S 6 | S 5

T20E

1934

from which
A juniper, 10 ins. diam., bears N. 21°30' E., 238 lks. dist., marked T 19 S R 6 W S 32 B T.

Chains

No other trees available.

raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Center of windmill base, bears N. 32° 30' E., on Sugar L Hill.

Land, gently rolling.

Soil, loose, coarse, shifting sand, with a heavy, gray clay subsoil, 3rd rate.

Timber, very scattered juniper.

Undergrowth, medium dense shedscale and match brush on the E. 36.00 chs, and with scattered greasewood on the remainder of the mile.

Fair grazing land.

N. 89°49' W., bet. secs. 6 and 31.

Over gently rolling land, through scattered timber, and medium dense undergrowth.

18.70 Leave greasewood, bears N. and S.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for 1/4 sec. cor. of sec. 6 only, with brass cap marked

1/4 S 6

1934

of stone, 3 ft. base, 2 ft. high, S. of cor. raise a mound

40.265 Proportionate point.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for 1/4 sec. cor. of sec. 31 only, with brass cap marked

1/4 S 31

1934

of stone, 3 ft. base, 2 ft. high, N. of cor. raise a mound

Descend 30 ft. to Tp. cor.

80.53 The original cor. monument of Tps. 19 and 20 S., Rs. 6 and 7 W., which is a juniper post, 5 ft. long, 3 ins. square, marked 6 notches on two edges, lying on the ground; unwitnessed. This cor. now refers to Tp. 19 S., Rs. 6 and 7 W. only.

At point for cor.

Set an iron post, 3 ft. long, 3 ins. diam., 28 ins. in the ground, for cor. of Tp. 19 S., Rs. 6 and 7 W., with brass cap marked

Chains

T19S
 R7W R6W
 S38 S31
 S 6
 T20S R6W
 1934

from which
 A juniper, 8 ins. diam., bears N. 59°30' E., 259 lks.
 dist., marked T 19 S R 6 W S 31 B T.
 A juniper, 8 ins. diam., bears N. 71°30' W., 127 lks.
 dist., marked T 19 S R 7 W S 36 B T.

raise a mound
 of stone, 3 ft. base, 2 ft. high, N. of cor.

Land, gently rolling.

Soil, loose, coarse, shifting sand, with a heavy, gray
 clay subsoil, 3rd rate.

Timber, very scattered juniper.

Undergrowth, medium dense shadscale, match brush and
 greasewood on the E. 16.00 chs., and shadscale and match
 brush on the remainder of the mile.

Fair grazing land.

WEST BOUNDARY OF T. 20 S., R. 6 W.

March 5, 1934, at the standard cor. of Tp. 20 S., Rs. 6
 and 7 W., in approximate latitude 39°01' N., longitude
 112°34' W., at 9h 26.7m a.m. by my watch, which reads
 correct 105th meridian time as determined by radio
 signals, March 4, 1934, I make an hour angle observation
 on Polaris east of the meridian, two each with the
 telescope in direct and reversed positions, reading the
 horizontal deflection angle from Polaris east to reference
 point, which is a well defined point on the skyline,
 approximately 25 miles to the east:

Watch fast of l.m.t.----- 30.3m
 Local mean time of observation----- 8h 56.4m a.m.
 Mean horizontal angle, Polaris to
 reference point----- 88° 39'
 Azimuth of Polaris----- 1° 21'.
 True bearing of reference point----- East.

From the standard cor. of Tp. 20 S., Rs. 6 and 7 W., I
 turn an angle of 90°00' to the left from reference point
 east, heretofore described.

Thence
 North, between secs. 31 and 36.

Over gently rolling land, through scattered timber, and
 medium dense undergrowth.

32.80 Old road, bears S. 80° E. and W.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the
 ground, and in small mound of stone, for 1/4 sec. cor., with
 brass cap marked

Chains

S36 | S31

1934

A juniper, 5 ins. diam., bears N. 67°15' E., 150 lks. from which
dist., marked $\frac{1}{2}$ S 31 B T.

A juniper, 12 ins. diam., bears S. 70° W., 59 lks.
dist., marked $\frac{1}{2}$ S 36 B T.

48.00 Leave sagebrush; enter medium dense shadscale, bears E. and

53.70 Old road, bears N. 80° W. and S. 80° E.

54.00 Enter small volcanic rock on the surface, bears E. and W.

59.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 25, 30, 31 and 36, with brass cap marked

T203
R77 | R67
S25 | S30
S36 | S31
1934

A juniper, 5 ins. diam., bears S. 7°15' E., 91 lks. from which
dist., marked T 20 S R 6 W S 31 B T.

A juniper, 8 ins. diam., bears S. 24° W., 279 lks.
dist., marked T 20 S R 7 W S 36 B T.

of stone, 3 ft. base, 2 ft. high, W. of cor. raise a mound

land, gently rolling.

Soil, loose, coarse, shifting sand, with a heavy, gray clay on the S. portion of the mile, 3rd rate; sandy clay loam, with scattered rock on the surface on the W. portion of the mile, 3rd rate.

Timber, scattered juniper.

Undergrowth, medium dense short sagebrush on the south portion of the mile, medium dense shadscale on the north portion of the mile.

Fair grazing land.

North, between secs. 25 and 30.

Over gently rolling land, through scattered timber, and medium dense undergrowth.

61.00 Leave shadscale; enter sagebrush, bears E. and W.

67.00 Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground to bedrock, and in a mound of stone, 7 ft. base, to top, for sec. cor., with brass cap marked

S25 | S30
1934

WEST BOUNDARY OF T. 20 S., R. 6 W.

Chains

from which
A juniper, 14 ins. diam., bears S. 6°45' W., 252 lks.
dist., marked $\frac{1}{2}$ S 25 B T.

70.75 Old road, bears E. and W.

71.70 Top of low rise, 30 ft. above $\frac{1}{2}$ sec. cor., bears E. and W.;
descend gentle N. slope, 10 ft. to sec. cor.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in
the ground, for cor. of secs. 19, 24, 25 and 30, with
brass cap marked

T20S	
R7W	R6W
S24	S19
1934	

from which
A juniper, 7 ins. diam., bears N. 60° E., 215 lks.
dist., marked T 20 S R 6 W S 19 B T.

No other trees available.

raise a mound
of stone, 5 ft. base, 4 ft. high, $\frac{1}{2}$ of cor.

Land, gently rolling.

Soil, sandy clay loam on the S. portion of the mile, and
loose, coarse, shifting sand on the N. portion of the
mile, 3rd rate.

Timber, scattered juniper.

Undergrowth, medium dense shadeless on the S. portion of
the mile, and medium dense sagebrush on the N. portion of
the mile.

Fair grazing land.

North, between secs. 19 and 24.

Over gently rolling land, through scattered timber, and
medium dense undergrowth; ascend a gentle S. slope.

21.90 Leave sand; enter clay soil, bears E. and W.

34.30 Top of low rise, 30 ft. above sec. cor., bears N. and W.
Leave clay soil; enter sand, bears E. and W.

40.00 set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the
ground, and in a small mound of stone, for $\frac{1}{2}$ sec. cor.,
with brass cap marked


$\frac{1}{2}$	
S24	S19
1934	

from which
A juniper, 18 ins. diam., bears S. 66° E., 80 lks.
dist., marked $\frac{1}{2}$ S 19 B T.

A juniper, 15 ins. diam., bears N. 72°30' W., 135 lks.
dist., marked $\frac{1}{2}$ S 24 B T.

WEST BOUNDARY OF T. 20 S., R. 6 W.

Chains
 46.40 Outcropping of volcanic rock, bears E. and W.
 73.10 Leave sand; and sagebrush; enter clay soil and shadscale, and volcanic rocks, bears E. and W.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 13, 18, 19 and 24, with brass cap marked




raise a mound of stone, 4 ft. base, 3 ft. high, W. of cor.

Land, gently rolling.
 Soil, loose, coarse, shifting sand on the S. and central portions of the mile; loose, clay loam on the remainder of the mile, 3rd rate.
 Timber, scattered juniper.
 Undergrowth, medium dense sagebrush and greasewood on the S. 73.10 chs., and medium dense shadscale on the remainder of the mile.
 Fair grazing land.

North, between secs. 13 and 18.

Over gently rolling land, through scattered timber, and medium dense undergrowth.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked



from which
 A juniper, 10 ins. diam., bears N. 25° W., 244 lks. dist., marked $\frac{1}{4}$ S 13 B T.

raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

48.00 Leave sandy clay soil; enter sand, bears E. and W.
 61.00 Leave sand; enter sandy clay loam, bears E. and W.
 70.70 Old road, between Clear Lake, Utah and Fillmore, Utah, bears N. 70° W. and S. 70° E.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 7, 12, 13 and 18, with brass cap marked

WEST BOUNDARY OF T. 20 S., R. 6 W.

T20S
R7W R6W
S12 S 7
S13 S18
1934

from which

A juniper, 16 ins. diam., bears N. 21°15'E., 383 lks. dist., marked T 20 S R 6 W S 7 B T.

A juniper, 10 ins. diam., bears S. 86°30' E., 23 lks. dist., marked T 20 S R 6 W S 18 B T.

A juniper, 12 ins. diam., bears N. 25°30' W., 334 lks. dist., marked T 20 S R 7 W S 12 B T.

No tree available in sec. 13.

raise a mound

of stone, 3 ft. base, 2 ft. high, W. of cor.

Land, gently rolling.

Soil, sandy clay loam, with scattered rock on the surface, on the south and north portions of the mile, loose, coarse, shifting sand on the north central portion, 3rd rate.

Timber, scattered juniper.

Undergrowth, medium dense shadscale.

Fair grazing land.

North, between secs. 7 and 12.

Over gently rolling land, through scattered timber, and medium dense undergrowth; ascend 20 ft. to $\frac{1}{4}$ sec. cor.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$
S12 | S 7
1934

from which

A juniper, 15 ins. diam., bears N. 34° E., 268 lks. dist., marked $\frac{1}{4}$ S 7 B T.

A juniper, 12 ins. diam., bears N. 25° W., 263 lks. dist., marked $\frac{1}{4}$ S 12 B T.

45.20 Old road, bears N. 80° E. and S. 80° W.

56.00 Leave sandy clay soil and shadscale; enter sand and sagebrush and greasewood, bears E. and W.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for cor. of secs. 1, 6, 7 and 12, with brass cap marked.

T20S
R7W R6W
S 1 | S 6
S 12 | S 7
1934

WEST BOUNDARY OF T. 20 S. R. 6 W.

Chains

A juniper, 10 ins. diam., bears S. 3°22'E., 538 lks. from which
 dist., marked T 20 S R 6 W S 7 B T.

A juniper, 8 ins. diam., bears N. 68°W., 372 lks.
 dist., marked T 20 S R 7 W S 1 B T.

raise a mound
 of stone, 3 ft. base, 2 ft. high, W. of cor.

Land, gently rolling.

Soil, sandy clay loam on the S. 56.00 chs., and loose, coarse, shifting sand on the remainder of the mile, 3rd rate.

Timber, scattered juniper.


Undergrowth, medium dense shadscale on the S. 56.00 chs., and medium dense sagebrush and greasewood on the remainder of the mile.

Fair grazing land.

North, bet. secs. 1 and 6.

Over gently rolling land, through scattered timber, and medium dense undergrowth.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, and in a small mound of stone, for $\frac{1}{4}$ sec. cor., with brass cap marked.



from which

A juniper, 20 ins. in diam., bears S. 22°45' E., 36 lks. dist., marked $\frac{1}{4}$ S 6 B T.


A juniper, 8 ins. in diam., bears S. 9°45' W., 174 lks. dist., marked $\frac{1}{4}$ S 1 B T.

48.00 Trench, 50 ft. long 5 ft. wide and 3 ft. deep, uncovering a white chalky substance, bears E. 1.90 chs. distant. Leave sand; enter sandy loam.

48.90 Old road, to Clear Lake, Utah, bears N. 70° E. and S. 70° W.

52.80 Old road, bears NW. and SE.

80.00 Set an iron post, 3 ft. long 1 in. diam., 28 ins. in the ground, for cor. of lots 4 and 5 of sec. 6 only, with brass cap marked



from which

A juniper, 10 ins. diam., bears N. 66° E., 427 lks. dist., marked S 6 L 4 B T.

WEST BOUNDARY OF T. 20 S., R. 6 W.

Chains

A juniper, 12 ins. diam., bears S. 69° E., 182 lks. dist., marked S 6 L 5 B T.

87.37 Intersect the S. bdy. of the Tp., 19 S., R. 7 W.

Set an iron post, 3 ft. long, 3 ins. diam., 30 ins. in the ground, for closing cor. of Tp. 20 S., Rs. 6 and 7 W., with brass cap marked

T19S R7W
S36
S 1 | S 6
R7W R6W
T20S
CC
1934

from which
A juniper, 8 ins. diam., bears S. 86°45' E., 240 lks. dist., marked T 20 S R 6 W S 6 C C B T.

A juniper, 7 ins. diam., bears S. 34°15' W., 150 lks. dist., marked T 20 S R 7 W S 1 C C B T.

raise a mound of stone, 3 ft. base, 2 ft. high, S. of cor.

From this Tp. closing cor., the cor. of Tp. 19 S., Rs. 6 and 7 W., bears N. 89°54' E., 2.65 chs. distant, and the cor. bet. secs. 1 and 36 N. bdy. T. 20 S. R. 7 W. bears S. 89° 54' W.

Land, gently rolling.

Soil, loose, coarse, shifting sand, with a white clay subsoil on the S. portion of the mile, 3rd rate; sandy loam, with a white clay subsoil, on the W. portion of the mile, 3rd rate.

Timber, scattered juniper.

Undergrowth, medium dense shadscale, match brush and greasewood.

Fair grazing land.

SUBDIVISION OF T. 20 S., R. 6 W.

From the standard cor. of secs. 35 and 36, on the S. bdy. of the Tp., heretofore described.

North on sectional guide meridian, between secs. 35 and 36.

Over gently rolling land, through medium dense undergrowth.

37.70 Old road, bears E. and W.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for sec. cor., with brass cap marked

S35 | S36
1934

SUBDIVISION OF T. 20 S., R. 6 W.

Chains

A juniper, 8 ins. diam., bears N. 12°30' E., 902 lks. from which dist., marked $\frac{1}{2}$ S 36 B T.

A juniper, 12 ins. diam., bears N. 63°30' W., 362 lks. dist., marked $\frac{1}{2}$ S 35 B T.

Enter very scattered juniper.

30.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, with a volcanic stone, 16x12x6 ins., marked 1 notch on the S. edge and 1 notch on the E. edge, deposited alongside, for cor. of secs. 25, 26, 35 and 36, with brass cap marked

T20S	R6W
S26	S25
335	336
1934	

A juniper, 14 ins. diam., bears N. 28° E., 672 lks. from which dist., marked T 20 S R 6 W S 25 B T.

A juniper, 12 ins. diam., bears S. 74°45' E., 364 lks. dist., marked T 20 S R 6 W S 36 B T.

A juniper, 20 ins. diam., bears S. 60° W., 720 lks. dist., marked T 20 S R 6 W S 35 B T.

A juniper, 12 ins. diam., bears W. 54°45' W., 312 lks. dist., marked T 20 S R 6 W S 26 B T.

Land, gently rolling sand dunes.

Soil, loose, coarse, shifting sand, with outcroppings of volcanic rock in places, 3rd rate.

Timber, very scattered juniper on the W. portion of the mile.

Undergrowth, medium dense, tall, sagebrush

Fair grazing land.

S. 89°54' E., on a random line between secs. 25 and 36.

30.00 Set temp. 1 sec. cor.

30.40 Intersect the E. bdy. of the Tp., at the cor. of secs. 25 and 36, heretofore described.

Hence

N. 89°54' W., on true line between secs. 25 and 36.

Over gently rolling land, through very scattered timber, and medium dense undergrowth.

30.20 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1 sec. cor., with brass cap marked

325
336
1934

SUBDIVISION OF T. 20 S., R. 6 W.

Chains

from which
A juniper, 6 ins. diam., bears S. 47°15' E., 25 lks.
dist., marked $\frac{1}{4}$ S 36 B T.

A juniper, 6 ins. diam., bears N. 41°15' W., 121 lks.
dist., marked $\frac{1}{4}$ S 25 B T.

63.40 Old road, bears N. 40° W. and S. 40° E.

80.46 The cor. of secs. 25, 26, 35 and 36.

Land, gently rolling sand dunes.

Soil, loose, coarse, shifting sand, with a heavy clay
subsoil, 3rd rate.

Timber, very scattered juniper.

Undergrowth, medium dense sagebrush, 2 to 5 ft. high, and
scattered yellow top.

Fair grazing land.

North on sectional guide meridian, between secs. 25 and
26.

Over rolling sand dunes, through scattered timber, and
medium dense undergrowth.

14.90 Old road, bears E. and W.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the
ground, with a volcanic stone, 9x6x5 ins., marked N,
deposited at the base, for $\frac{1}{4}$ sec. cor., with brass cap
marked

S26 | S25

1934

from which
A juniper, 20 ins. diam., bears N. 37° E., 67 lks.
dist., marked $\frac{1}{4}$ S 25 E T.

A juniper, 8 ins. diam., bears S. 14°45' W., 54 lks.
dist., marked $\frac{1}{4}$ S 26 B T.

64.80 Old road, bears E. and W.

80.00 Set an iron post, 3 ft. long, 2 in. diam., 27 ins. in
the ground, with a volcanic stone, 14x12x8 ins., marked
2 notches on the S. edge and 1 notch on the E. edge,
deposited alongside, for cor. of secs. 23, 24, 25 and 26,
with brass cap marked

T20S R6W
S23 | S24

S26 | S25

1934

from which
A juniper, 20 ins. diam., bears N. 70°30' E., 421 lks.
dist., marked T 20 S R 6 W S 24 B T.

A juniper, 6 ins. diam., bears S. 49° E., 630 lks.
dist., marked T 20 S R 6 W S 25 B T.

SUBDIVISION OF T. 20 S., R. 6 W.

Chains

A juniper, 6 ins. diam., bears S. 70° 45' W., 636 lks. dist., marked T 20. S R 6 W S 26 B T.

A juniper, 20 ins. diam., bears N. 82° W., 575 lks. dist., marked T 20. S R 6 W S 23 B T.

Land, rolling sand dunes.

Soil, loose, coarse, shifting sand, with a heavy, gray clay subsoil, and with volcanic rock outcroppings in places, 3rd rate.

Timber, very scattered juniper.

Undergrowth, medium dense sagebrush, 2 to 5 ft. high, and scattered yellow top.

Fair grazing land.

S. 89° 54' E., on a random line between secs. 24 and 25.

40.00 Set temp. & sec. cor.

80.95 Intersect the E. bdy. of the Tp., at the cor. of secs. 24 and 25, heretofore described.

Thence

N. 89° 54' E., on true line between secs. 24 and 25.

Over rolling sand dunes, through very scattered timber, and medium dense undergrowth; ascend a gentle E. slope.

12.20 Top of volcanic outcropping, 20 ft. above sec. cor., bears N., about 3.00 chs. dist. and S., about 5.00 chs. dist.

40.95 Easting of 40.00 chs. from the cor. of secs. 23, 24, 25 and 26.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for sec. cor., with brass cap marked

S24
S25
1034

A juniper, 6 ins. diam., bears N. 67° E., 439 lks. dist., marked S 24 B T. from which

A juniper, 7 ins. diam., bears S. 68° E., 251 lks. dist., marked S 25 B T.

80.95 The cor. of secs. 23, 24, 25 and 26.

Land, rolling sand dunes.

Soil, loose, coarse, shifting sand, with a heavy, gray clay subsoil, and with outcroppings of volcanic rock in places, 3rd rate.

Timber, very scattered juniper.

Undergrowth, medium dense sagebrush, 2 to 5 ft. high, and scattered yellow top.

SUBDIVISION OF T. 20 S., R. 6 W.


Chains

Fair grazing land.

North on sectional guide meridian, between secs. 23 and 24.
 Over rolling sand dunes, through very scattered timber,
 and medium dense undergrowth.


80.00 Leave timber, bears E. and W.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the
 ground, for sec. cor., with brass cap marked



of stone, 3 ft. base, 2 ft. high, . of cor. raise a mound

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the
 ground, for cor. of secs. 13, 14, 23 and 24, with brass
 cap marked



of stone, 4 ft. base, 3 ft. high, . of cor. raise a mound

Land; rolling sand dunes.

Soil, loose, coarse, shifting sand, with a heavy, gray
 clay subsoil, and with outcroppings of volcanic rock in
 places, 3rd rate.

Timber, very scattered juniper on the E. portion of the
 mile.

Undergrowth, medium dense sagebrush, 2 to 5 ft. high, and
 scattered yellow top.

Fair grazing land.

S. 89°54' E., on a random line between secs. 13 and 24.

40.00 Set temp. sec. cor.

81.43 Intersect the E. bdy. of the Tp., at the cor. of secs. 13
 and 24, heretofore described.

Thence

N. 89°54' W., on true line between secs. 13 and 24.

Over rolling sand dunes, through medium dense undergrowth.

41.43 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the
 ground, for sec. cor., with brass cap marked

SUBDIVISION OF T. 20 S., R. 6 W.

Chains

S13
S24
1934

from which
A juniper, 10 ins. diam., bears S. 58° 30' E., 580 lks.
dist., marked S 24 R T.

raise a mound
of stone, 4 ft. base, 3 ft. high, W. of cor.

81.43 The cor. of secs. 13, 14, 23 and 24.

Land, rolling sand dunes.

Soil, loose, coarse, shifting sand, with a heavy, gray
clay subsoil, with volcanic outcroppings in places, 3rd
rate.

No timber.

Undergrowth, medium dense scrubbrush, 2 to 5 ft. high, and
scattered yellow top.

Fair grazing land.

North on section 14 guide meridian, between secs. 13 and
14.

Over rolling sand dunes, through medium dense undergrowth

40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the
ground, for sec. cor., with brass cap marked

S14 | S13
1934

raise a mound
of stone, 3 ft. base, 3 ft. high, W. of cor.

41.10 Old road, bears E. and W.

30.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in
the ground, with a volcanic stone, 24x16x9 ins., marked
4 notches on the S. edge and 1 notch on the E. edge,
deposited alongside, for cor. of secs. 11, 12, 13 and 14,
with brass cap marked

T20S R6W
S11 | S12
S14 | S13
1934

from which
A juniper, 10 ins. diam., bears N. 19° E., 195 lks.
dist., marked T 20 S R 6 W S 12 P T.

A juniper, 8 ins. diam., bears N. 15° 30' W., 750 lks.
dist., marked T 20 S R 6 W S 11 P T.

raise a mound
of stone, 4 ft. base, 3 ft. high, W. of cor.

-SUBDIVISION OF T. 20 S., R. 6 W.

Chains

Land, rolling small sand dunes.

Soil, loose, coarse, shifting sand, with a heavy, gray clay subsoil, 3rd rate.

Timber, a few widely scattered juniper in the W. portion of the mile.

Undergrowth, medium dense sagebrush, and scattered rabbit brush and yellow top.

Fair grazing land.

S. 89°54' E., on a random line between secs. 12 and 13.

40.00 Set temp. sec. cor.

81.92 Intersect the E. bdy. of the Tp., at the cor. of secs. 12 and 13, heretofore described.

Thence

N. 89°54' W., on true line between secs. 12 and 13.

Over rolling sand dunes, through medium dense undergrowth.

41.92 Easting of 40.00 chs. from the cor. of secs. 11, 12, 13 and 14.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for sec. cor., with brass cap marked

312
313
1034

from which
A juniper, 18 ins. diam., bears N. 37°50' E., 811 lks. dist., marked S. 12 E. T.

raise a mound
of stone, 3 ft. base, 5 ft. high, N. of cor.

61.00 Enter scattered juniper, bears W. and E.

81.92 The cor. of secs. 11, 12, 13 and 14.

Land, rolling small sand dunes.

Soil, loose, coarse, shifting sand, with a heavy, gray clay subsoil, 3rd rate.

Timber, a few widely scattered juniper on the W. portion of the mile.

Undergrowth, medium dense sagebrush, 3 to 5 ft. high, and scattered yellow top and rabbit brush.

Fair grazing land.

North on sectional guide meridian, between secs. 11 and 12.

Over rolling sand dunes, through widely scattered timber.

SUBDIVISION OF T. 20S R. 6W S. 12

Chains

and medium dense undergrowth
 28.50 Old road, bears N. 70° E. and S. 70° W. of
 35.60 Head of wash, 10 lks. wide, 2 ft. deep, drains E.
 40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the
 ground, for $\frac{1}{2}$ sec. cor., with brass cap marked.

S11 | S12
 1934

from which
 A juniper, 6 ins. diam., bears S. 85° E., 284 lks.
 dist., marked $\frac{1}{2}$ S 12 E T.

of stone, 3 ft. base, 2 ft. high, W. of cor. raise a mound

62.50 Enter volcanic outcroppings, bears E. and W.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in
 the ground, with a volcanic stone, 14x9x6 ins., marked 5
 notches on the S. edge and 1 notch on the E. edge,
 deposited alongside, for cor. of secs. 1, 2, 11 and 12,
 with brass cap marked

T20S R6W
 S 2 | S 1
 S11 | S12
 1934

from which
 A juniper, 14 ins. diam., bears N. 24° 30' E., 736 lks.
 dist., marked T 20 S R 6 W S 1 P T.

A juniper, 4 ins. diam., bears S. 85° E., 408 lks.
 dist., marked T 20 S R 6 W S 12 B T.

A juniper, 8 ins. diam., bears S. 6° W., 436 lks.
 dist., marked T 20 S R 6 W S 11 B T.

A juniper, 6 ins. diam., bears N. 60° 30' W., 363 lks.
 dist., marked T 20 S R 6 W S 2 B T.

land, rolling small sand dunes.
 soil, loose, coarse, shifting sand, with a heavy gray
 clay subsoil, and with outcroppings of volcanic rock on
 the N. portion of the mile, 3rd rate.
 Timber, scattered juniper:
 Undergrowth, sage, yellow top and rabbit brush.
 Fair grazing land.

S. 20° 24' E., on a random line between secs. 1 and 12.
 40.00 Set temp. $\frac{1}{2}$ sec. cor.
 50.00 Intersect the E. bdy. of the Tp., 2 lks. N. of the cor. of
 secs. 1 and 12, heretofore described.
 Thence
 N. 89° 53' E., on true line between secs. 1 and 12.

SUBDIVISION OF T. 20 S., R. 6 W.

Chains

0.40 Over rolling sand dunes, through medium dense undergrowth.

42.40 Old road, bears NE. and SW.
Easting of .40.00 chs. from the cor. of secs. 1, 2, 11 and 12.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$ S 1
S12

1934

raise a mound of stone, 4 ft. base, 3 ft. high, W. of cor.

64.50 Enter outcroppings of volcanic rock, bears W. and S.

82.40 The cor. of secs. 1, 2, 11 and 12.

Land, rolling small sand dunes.

Soil, loose, coarse, shifting sand, with a heavy, gray clay subsoil, with outcroppings of volcanic rock on the W. portion of the mile, 3rd rate.

Timber, a few widely scattered juniper on the W. portion of the mile.

Undergrowth, medium dense sagebrush, 2 to 5 ft. high, and scattered yellow top and rabbit brush.

Fair grazing land.

North on sectional guide meridian, between secs. 1 and 2.

Over a rolling E. slope, with outcroppings of volcanic rock, through widely scattered timber, and medium dense undergrowth.

34.80 Old road, bears E. and W.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 24 ins. in the ground to solid rock, and in a large mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$
S 2 | S 1

1934

raise a mound of stone, 5 ft. base, 4 ft. high, W. of cor.

80.00 Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground to solid rock, and in a mound of stone, 5 ft. base to top, for cor. of lots 4 and 5 of sec. 1, and lots 1 and 8 of sec. 2, with brass cap marked

S 2 $\frac{1}{8}$ + $\frac{4}{5}$ S 1

1934

raise a mound of stone, 4 ft. base, 3 ft. high, W. of cor.

SUBDIVISION OF T. 20 S., R. 6 W.

Chains
86.89

Intersect the N. bdy. of the Tp.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in ground, for closing cor. of secs. 1 and 2, with brass cap marked

T20S R6W
S35

S 2 | S 1
T20S R6W

CC
1934

of stone, 4 ft. base, 3 ft. high, S. of cor. raise a mound

From this closing cor. the cor. of secs. 35 and 36, T. 20 S., R. 6 W., bears S. 89°49' E., 2.27 chs. dist.

Land, rolling sand dunes,

Soil, loose, coarse, shifting sand, with a heavy, gray clay subsoil, and with numerous outcroppings of volcanic rock, 3rd rate.

Timber, a few widely scattered juniper on the S. portion of the mile.

Undergrowth, medium dense sagebrush, 2 to 4 ft. high, and scattered yellow top and rabbit brush.

Fair grazing land.

From the standard cor. of secs. 34 and 35, on the S. bdy. of the Tp., heretofore described,

N. 0°01' W., between secs. 34 and 35.

Over gently rolling land, through medium dense undergrowth in Devils Kitchen.

11.40 Old road, bears W. and E., about 2.00 chs. to junction of road between Clear Lake, Utah and Fillmore, Utah.

13.60 Ungraded road, between Clear Lake, Utah and Fillmore, Utah, bears N. 70° W. and SE.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with a volcanic stone, 6x4x4 ins., marked $\frac{1}{2}$ on one face, deposited alongside, for $\frac{1}{2}$ sec. cor., with brass cap marked

S34 | S35

1934

of stone, 3 ft. base, 2 ft. high, W. of cor. raise a mound

54.00 Old road, bears N. 20° W. and S. 20° E.

65.00 Enter scattered juniper, bears E. and W.

71.20 Old road, bears N. 30° E. and S. 30° W.

SUBDIVISION OF T. 20 S., R. 6 W.

80.00

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, with a volcanic stone, 12x6x6 ins., marked 2 notches on the E. edge and 1 notch on the S. edge, deposited alongside, for cor. of secs. 26, 27, 34 and 35, with brass cap marked

T20S	R6W
S27	S26
S34	S35
1934	

A juniper, 16 ins. diam., bears N. 46° 30' E., 56 lks. dist., marked T 20 S R 6 W S 26 B T. from which

A juniper, 20 ins. diam., bears S. 75° 15' E., 120 lks. dist., marked T 20 S R 6 W S 35 B T.

A juniper, 16 ins. diam., bears S. 35° 30' W., 37 lks. dist., marked T 20 S R 6 W S 34 B T.

A juniper, 16 ins. diam., bears W. 20° 15' W., 125 lks. dist., marked T 20 S R 6 W S 27 B T.

Land, gently rolling.

Soil, sandy clay loam, with a heavy, gray clay subsoil, 3rd rate.

Timber, scattered juniper on the N. portion of the mile.

Undergrowth, medium dense sagebrush, 2 to 4 ft. high, russian thistle and yellow top.

Fair grazing land.

S. 89° 56' E., on a random line between secs. 26 and 35.

40.00 Set temp. sec. cor.

80.00 Intersect N. and S. line, 5 lks. S. of the cor. of secs. 25, 26, 35 and 36.

Thence

N. 89° 58' W., on true line between secs. 26 and 35.

Over rolling sand dunes, through scattered timber, and medium dense undergrowth.

30.50 Old road, bears N. 10° W. and S. 10° E.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for sec. cor., with brass cap marked

S26
S35
1934

of stone, 3 ft. base, 3 ft. high, W. of cor. raise a mound

62.90 East rim of Devils Kitchen; also volcanic ledges, bears NW. and S. 20° E.; descend a steep W. slope.

75.00 Foot of volcanic ledge, bears N. and S., 60 ft. below top.

SUBDIVISION OF T. 20 S., R. 6 W.

Chains

- 78.10 Old road, bears N. and S.
- 80.00 The cor. of secs. 26, 27, 34 and 35, 60 ft. below top of rim.
Land, gently rolling on the E. 62.00 chs., and rolling on the remainder of the mile.
Soil, loose, coarse, shifting sand, with a heavy, gray clay subsoil, and with outcroppings of volcanic rock in places, 3rd rate.
Timber, scattered juniper.
Undergrowth, medium dense sagebrush and rabbit brush.
Fair grazing land.

N. 0°01' E., between secs. 26 and 27.

Over rolling broken land, with outcroppings of volcanic rock, through scattered timber, and medium dense undergrowth.

- 14.50 Old road, bears N. 20° W. and S. 20° E.; ascend a steep SW. slope, leaving Devils Kitchen.
- 22.60 Rim of Devils Kitchen; also broken volcanic ledges, 70 ft. above road, bears NW. and SE.
- 32.20 Rim of Devils Kitchen and broken volcanic ledges, bears W. 10° E. and S. 10° W.; descend a NW. slope.
- 37.20 Base of ledges, 40 ft. below rim, bears N. 10° E. and S. 10° W.; thence over gently rolling land.
- 40.00 Set an iron post, 5 ft. long, 1 in. diam., 27 ins. in the ground, for sec. cor., with brass cap marked

S27 | S26

1934

of stone, 3 ft. base, 3 ft. high, W. of cor. raise a mound

- 42.70 Ascend a steep SW. slope.
- 46.70 Rim of Devils Kitchen, and broken volcanic ledges, 40 ft. above base of ascent, bears W. 10° W. and S. 10° E.; thence over rolling land.
- 72.50 Old road, bears W. 60° E. and S. 30° W.
- 80.00 Set an iron post, 3 ft. long, 2 1/2 ins. diam., 27 ins. in the ground, for cor. of secs. 22, 23, 26 and 27, with brass cap marked

T20S R6W
S22 | S23

S27 | S26
1934

of stone, 3 ft. base, 3 ft. high, W. of cor. raise a mound

Chains

Land, rolling and broken.
 Soil, sandy clay loam, with numerous outcroppings of volcanic rock and ledges, 3rd rate.
 Timber, scattered juniper.
 Undergrowth, medium dense sagebrush and yellow top.
 Fair grazing land.

S. 89° 58' E., on a random line bet. secs. 23 and 26.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.02 Intersect the cor. of secs. 23, 24, 25 and 26.

Thence

N. 89°58' W., on true line bet. secs. 23 and 26.

Over gently rolling sand dunes, through scattered timber, and medium dense undergrowth.

40.01 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with broken glass deposited around post, for $\frac{1}{4}$ sec. cor., with brass cap marked

$$\frac{\frac{1}{4} \text{ S23}}{\text{S26}} \\ 1934$$

from which

A juniper, 12 ins. diam., bears north, 128 lks. dist., marked $\frac{1}{4}$ S 23 B T.

A juniper, 10 ins. diam., bears south, 266 lks. dist., marked $\frac{1}{4}$ S 26 B T.

Ascend a rolling E. slope.

41.10 Old road, bears N. 80° W. and SE.

44.70 Junction of two roads, one bears N. 10° E. and S. 30° W., and one N. 80° W. and S. 80° E.

77.50 Old road, bears N. and S., about 3.00 chs. to junction of road from SE. and SW.

80.02 The cor. of secs. 22, 23, 26, and 27, 30 ft. above $\frac{1}{4}$ sec. cor.

Land, gently rolling sand dunes.

Soil, loose, coarse, shifting sand, with a heavy, gray clay subsoil, 3rd rate.

Timber, scattered juniper.

Undergrowth, medium dense sagebrush.

Fair grazing land.

N. 0°01' W., bet. secs. 22 and 23.

Over rolling sand dunes, through scattered timber, and medium dense undergrowth; gradually ascend

SUBDIVISION OF T. 20 S., R. 6 W.

Chains

- 5.60 Old road, bears NW. and SE.
- 10.00 Old road, bears NE. and SW.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked.




1934

from which

- A juniper, 24 ins. diam., bears N. 25° E., 38 lks. dist., marked $\frac{1}{4}$ S 23 B T.
- A juniper, 14 ins. diam., bears N. 40° 30' W., 130 lks. dist., marked $\frac{1}{4}$ S 22 B T.
- Ascend a gradual S. slope.
- 57.80 Top of ascent, 80 ft. above $\frac{1}{4}$ sec. cor., bears E. and W.; descend a gradual N. slope.
- 72.60 Draw, 20 ft. below top of ascent, drains SE.; ascend a gradual S. slope.
- 80.00 On a gentle SE. slope, 40 ft. above draw.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, with a volcanic stone, 12x6x6 ins., marked 3 notches on the S. edge and 2 notches on the E. edge, deposited alongside for cor. of secs. 14, 15, 22 and 23, with brass cap marked



from which

- A juniper, 20 ins. diam., bears N. 71° 30' E., 170 lks. dist., marked T 20 S R 6 W S 14 B T.
- A juniper, 14 ins. diam., bears S. 18° W., 200 lks. dist., marked T 20 S R 6 W S 22 B T.
- A juniper, 14 ins. diam., bears N. 40° W., 86 lks. dist., marked T 20 S R 6 W S 15 B T.
- No tree available in sec. 23.
- Land, rolling sand dunes.
- Soil, loose, coarse, shifting sand, with a heavy, gray clay subsoil, 3rd rate.
- Timber, scattered juniper.
- Undergrowth, medium dense sagebrush.
- Fair grazing land.

SUBDIVISION OF T. 20 S., R. 6 W.

Quins

S. 89°58' E., on a random line between secs. 14 and 23.

06000

Set temp. 1/2 sec. cor.

79.98

Intersect N. and S. line, 2 lks. N. of the cor. of secs. 13, 14, 23 and 24.

80000

Thence

N. 89°57' W., on true line between secs. 14 and 23.

Over rolling sand dunes, through scattered timber, and medium dense undergrowth; ascend a gentle E. slope, 50 ft. to 1/2 sec. cor.

39.99

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/2 sec. cor., with brass cap marked

1 S14
S23
1934

raise a mound of stone, 3 ft. base, 3 ft. high, N. of cor.

63.00

Old road, bears N. 10° E. and S. 10° W.

65.10

Base of ascent, bears N. 20° E. and S. 20° W.; ascend a gradual E. slope.

79.98

The cor. of secs. 14, 15, 22 and 23, 105 ft. above base of ascent.

Land, rolling sand dunes.

Soil, loose, coarse, shifting sand, with a heavy, gray clay subsoil, 3rd rate.

Timber, scattered juniper.

Undergrowth, medium dense sagebrush, 2 to 5 ft. high.

Fair grazing land.

N. 0°01' W., between secs. 14 and 15.

Over rolling sand dunes, through scattered timber, and medium dense undergrowth; ascend gradually along a SE. slope.

25.70

Top of ascent, 60 ft. above sec. cor., slopes N. 80° E.; descend a gradual N. slope.

40.00

On a gradual N. slope, 65 ft. below top of ascent.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/2 sec. cor., with brass cap marked

S15 | S14
1934

from which
A juniper, 12 ins. diam., bears S.44°30' E., 177 lks. dist., marked 1/2 S 14 B T.
A juniper, 14 ins. diam., bears N.48°30' W., 144 lks. dist., marked 1/2 S 15 B T.

SUBDIVISION OF T. 20 S., R. 6 W.

Chains
 51.20 Old road, bears N. 70° E. and S. 50° E.
 78.00 Base of descent, 100 ft. below $\frac{1}{2}$ sec. cor., bears N. 30° E. and S. 50° E.
 80.00 Set an iron post, 5 ft. long, 2 1/2 ins. diam., 27 ins. in the ground, with a volcanic stone, 12x6x6 ins., marked 4 notches on the S. edge and 2 notches on the E. edge, for cor. of secs. 10, 11, 14 and 15, with brass cap marked

T20S	R6W
S10	S11
S15	S14
1934	

raise a mound of stone, 5 ft. base, 3 ft. high, N. of cor.
 Land, rolling sand dunes.
 Soil, loose, coarse, shifting sand, with a heavy, gray clay subsoil, 3rd rate.
 Timber, very scattered juniper.
 Undergrowth, medium dense sagebrush, 2 to 5 ft. high.
 Fair grazing land.

S. 22° 57' E., on a random line between secs. 11 and 14.
 40.00 Set temp. $\frac{1}{2}$ sec. cor.
 70.00 Intersect the cor. of secs. 11, 12, 13 and 14.
 Thence
 N. 80° 57' E., on true line between secs. 11 and 14.
 Over rolling sand dunes, through medium dense undergrowth
 20.00 Old road, bears N. 30° E. and S. 30° W.
 40.00 Set an iron post, 5 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{2}$ sec. cor., with brass cap marked

S11
S14
1934

raise a mound of stone, 2 ft. base, 2 ft. high, N. of cor.
 Ascend a very gentle E. slope.
 51.00 Old road, bears N. and S.
 70.00 The cor. of secs. 10, 11, 14 and 15, 35 ft. above $\frac{1}{2}$ sec. cor.
 Land, rolling sand dunes.
 Soil, loose, coarse, shifting sand, with a heavy, gray clay subsoil, 3rd rate.
 Timber, scattered juniper.

SUBDIVISION OF T. 20 S., R. 6 W.

Chains

Undergrowth, medium dense sagebrush, 2 to 5 ft. high.
Fair grazing land.

N. 0°01' W., between secs. 10 and 11.

Over rolling sand dunes, through medium dense undergrowth.

40.00

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with a volcanic stone, 4x4x3 ins., marked X, deposited at the base, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$
S10 | S11

1934

No other suitable accessories available.

80.00

Set an iron post, 3 ft. long, 2 ins. diam., 14 ins. in the ground to solid rock, with a volcanic stone, 12x10x8 ins., marked 5 notches on the S. edge and 2 notches on the E. edge, deposited alongside, and in a mound of stone, 3 ft. base, to top, for cor. of secs. 2, 3, 10 and 11, with brass cap marked

T20S R6W
S 3 | S 2

S10 | S11
1934

Land, rolling sand dunes.

Soil, loose, coarse, shifting sand, with heavy, gray clay subsoil, 3rd rate.

Timber, a few widely scattered juniper.

Undergrowth, medium dense sagebrush, 2 to 5 ft. high.

Fair grazing land.

S. 89°57' E., on a random line between secs. 2 and 11.

40.00

Set temp. $\frac{1}{4}$ sec. cor.

79.94

Intersect N. and S. line, 12 lks. N. of the cor. of secs. 1, 2, 11 and 12.

Thence

N. 89°52' W., on true line between secs. 2 and 11.

Over rolling sand dunes, through a few widely scattered junipers, and medium dense undergrowth.

33.70

Old road, bears NE. and SW.

39.97

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked

SUBDIVISION OF T. 20 S. 11 E. R. 15

Chains

511

S11
1934

A juniper, 14 ins. diam., bears N. 50°45' E., 166 lks. dist., marked $\frac{1}{4}$ S 2 B T. ✓

A juniper, 20 ins. diam., bears S. 42°15' W., 210 lks. dist., marked $\frac{1}{4}$ S 11 B T. ✓

79.94 The cor. of secs. 2, 3, 10 and 11.
Land, rolling sand dunes.
Soil, loose, coarse, shifting sand, with a heavy, gray clay subsoil, 3rd rate.
Timber, a few widely scattered juniper.
Undergrowth, medium dense sagebrush, 2 to 5 ft. high.
Fair grazing land.

N. 0°01' W., on true line between secs. 2 and 3.

Over rolling sand dunes, through medium dense undergrowth.

35.90 Old road, bears N. 60° E. and S. 60° W.

40.00 Set an iron post, 3 ft. long, 1 in. diam., over X cut in solid rock, and in a mound of stone, 5 ft. base, to top, for $\frac{1}{4}$ sec. cor., with brass cap marked

S 3 | S 2

1934

42.00 Old road, bears W. and S. 75° E.

80.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for cor. of lots 4 and 5 of sec. 2, and lots 1 and 8 of sec. 3, with brass cap marked

S3 $\frac{1}{8}$ | $\frac{4}{5}$ S2

1934

of stone, 3 ft. base, 3 ft. high, W. of cor. & mound

86.83 Intersect the N. bdy. of the Tp.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for closing cor. of secs. 2 and 3, with brass cap marked

T19S R6W

S34

S 3 | S 2

T20S R6W

CC

1934

SUBDIVISION OF T. 20 S., R. 6 W.

Chains

raise a mound of stone, 3 ft. base, 3 ft. high, S. of cor.

From this closing cor. the cor. of secs. 34 and 35, T. 19 S., R. 6 W., bears S. 89°49' E., 1.79 chs. distant.

Land, rolling sand dunes.

Soil, loose, coarse, shifting sand, with outcroppings of volcanic rock in places, and with a heavy, gray clay subsoil, 3rd rate.

Timber, a few scattered juniper.

Undergrowth, medium dense sagebrush, 2 to 5 ft. high.

Fair grazing land.

From the standard cor. of secs. 33 and 34, on the S. bdy. of the Tp., heretofore described.

N. 0°01' W., between secs. 33 and 34.


Over gently rolling land, through medium dense undergrowth.

22.30 Old road, bears E. and W.; enter rolling sand dunes.

24.00 Enter scattered juniper, and rabbit brush, bears E. and W.

40.00 On a gentle SE. slope.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for a sec. cor., with brass cap marked



A juniper, 8 ins. diam., bears S. 8°45' E., 127 lks. dist., marked ± S 34 B T. from which


A juniper, 12 ins. diam., bears N. 20°30' W., 128 lks. dist., marked ± S 33 B T.

Ascend a gentle SE. slope, 60 ft. to sec. cor.

54.60 Ungraded road, between Fillmore, Utah and Clear Lake, Utah; bears N. 60° W. and S. 60° E.

72.80 Old road, bears NW. and S. 70° E.; small wash, drains SE.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, with a volcanic stone, 20x16x10 ins., marked 3 notches on the E. edge and 1 notch on the S. edge, deposited alongside, for cor. of secs. 27, 28, 33 and 34, with brass cap marked



SUBDIVISION OF T. 20 S., R. 6 W.

Chains

A juniper, 20 ins. diam., bears N. 87° E., 158 lks. from which
dist., marked T 20 S R 6 W S 27 B T.

A juniper, 24 ins. diam., bears S. 21° E., 203 lks.
dist., marked T 20 S R 6 W S 34 B T.

A juniper, 12 ins. diam., bears S. 52° 30' W., 151 lks.
dist., marked T 20 S R 6 W S 33 P T.

A juniper, 20 ins. diam., bears N. 70° 15' W., 360 lks.
dist., marked T 20 S R 6 W S 28 B T.

of stone, 3 ft. base, 3 ft. high, raise a mound
". of cor.

Land, gently rolling and rolling; drainage, southeasterly

Soil, sandy clay loam, with outcroppings of volcanic rock
in places, 3rd rate.

Timber, scattered juniper on the N. 56.00 chs.

Undergrowth, medium dense sagebrush on the S. 24.00 chs.
and sagebrush and rabbit brush on the remainder of the
mile.

Fair grazing land.

S. 89° 49' E., on a random line between secs. 27 and 34.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

30.04 Intersect W. and S. line, 2 lks. N. of the cor. of secs.
26, 27, 34 and 35.

Thence

N. 89° 48' W., on true line between secs. 27 and 34.

Over gently rolling land, through scattered timber, and
medium dense undergrowth.

21.60 Wash, 10 lks. wide, 2 ft. deep, drains S.; thence along
a gentle S. slope.

27.50 Old road, bears NE. and SW.; thence over a gentle SE.
slope.

34.00 Old road, bears N. 20° W. and S. 20° E.

40.02 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the
ground, for $\frac{1}{4}$ sec. cor., with brass cap marked

S27

S34

1934

A juniper, 16 ins. diam., bears S. 53° 15' W., 154 lks. from which
dist., marked $\frac{1}{4}$ S 34 B T.

A juniper, 20 ins. diam., bears N. 39° 45' W., 562 lks.
dist., marked $\frac{1}{4}$ S 27 B T.

42.50 Old road, bears NW. and SE.

SUBMISSION OF T. 20 S., R. 6 W.

the cor. of secs. 27, 28, 33 and 34, 30 ft. above $\frac{1}{2}$ sec. cor.

Land, gently rolling and rolling; drainage, southerly.

Soil, sandy clay loam, with numerous small sand dunes, and with a heavy, gray clay subsoil, 3rd rate.

Timber, scattered juniper.

Undergrowth, medium dense sagebrush, yellow top and rabbit brush.

Fair grazing land.

N. 0°01' W., between secs. 27 and 28.

Over rolling land, through scattered timber, and medium dense undergrowth; ascend a gentle SE. slope.

5.00 Top of ascent, 30 ft. above sec. cor., bears E. and W.; descend a gentle W. slope.

15.00 Base of descent, 30 ft. below top of ascent, bears E. and W.; ascend a gradual S. slope.

29.50 Rise, 105 ft. above base of descent, bears E. and W.; thence along a gentle SW. slope.

40.00 On a gentle SW. slope.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{2}$ sec. cor., with brass cap marked

S28	S27
-----	-----

1934

from which
A juniper, 5 ins. diam., bears S. 59° E., 275 lks. dist., marked $\frac{1}{2}$ S 27 B T.

A juniper, 6 ins. diam., bears N. 22° 15' W., 90 lks. dist., marked $\frac{1}{2}$ S 28 B T.

Ascend a gentle SW. slope, 90 ft. to sec. cor.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 21, 22, 27 and 28, with brass cap marked

T20S	R6W
S21	S22

S28	S27
-----	-----

1934

from which
A juniper, 22 ins., bears N. 84° 45' E., 209 lks. dist., marked T20SR6WS22BT.

A juniper, 16 ins., bears S. 60° 45' E., 234 lks. dist., marked T 20 S R 6 W S 27 B T.

A juniper, 24 ins. diam., bears S. 71° W., 83 lks. dist., marked T 20 S R 6 W-S 28 B T.

SUBDIVISION OF T. 20 S. R. 6 W.

Chains

A juniper, 12 ins. diam., bears N. 75° 45' W., 159.0 lbs. dist., marked T 20 S R 6 W S 21 B T.

Land, rolling sand dunes.
Soil, loose, coarse, shifting sand, with outcroppings of volcanic rock in places, and with a heavy, gray clay subsoil, 3rd rate.

Timber, scattered juniper.

Undergrowth, medium dense sagebrush, yellow top, and rabbit brush.

Fair grazing land.

S. 89° 48' E., on a random line between secs. 22 and 27.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.08 Intersect N. and S. line, 5 lks. S. of the cor. of secs. 22, 23, 26 and 27.

Thence

N. 69° 50' W., on true line between secs. 22 and 27.

Over rolling sand dunes, through scattered timber, and medium dense undergrowth: ascend a gradual E. slope.

7.60 Top of ascent, 20 ft. above sec. cor., slopes S.; descend a gradual W. slope.

13.60 Base of descent, 30 ft. below top of ascent, bears N. and S. Old road, bears N. 20° W. and S. 20° E.; ascend a gradual SE. slope.

40.04 On a gradual SE. slope, 95 ft. above base of descent.

Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground to solid rock, and in a mound of stone, 3 ft. base, to top, for $\frac{1}{4}$ sec. cor., with brass cap marked

S22

S27

1934

A juniper, 10 ins. diam., bears S. 72° 45' W., 173 lks. dist., marked $\frac{1}{4}$ S 27 B T. from which

A juniper, 20 ins. diam., bears N. 7° 15' W., 29 lks. dist., marked $\frac{1}{4}$ S 22 B T.

53.10 Low ridge, 60 ft. above $\frac{1}{4}$ sec. cor., bears N. and S.; descend a gradual SW. slope.

59.60 Old road, bears N. and S.

80.08 The cor. of secs. 21, 22, 27 and 28, 55 ft. below top of ridge.

Land, rolling sand dunes.

Soil, loose, coarse, shifting sand, with volcanic outcroppings in places, and with a heavy, gray clay subsoil, 3rd rate.

Timber, scattered juniper. Undergrowth, medium dense sagebrush and yellow top.

Fair grazing land.

N. 0°01' W., between secs. 21 and 22.

Over rolling land, through scattered timber; and medium dense undergrowth; ascend a gradual SW. slope.

28.00 Top of ascent, 60 ft. above sec. cor., bears E. and W.; descend a gentle NW. slope.

40.00 On a gentle NW. slope, 10 ft. below top of ascent.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{2}$ sec. cor., with brass cap marked

S21 | S22

1934

A juniper, 8 ins. diam., bears N. 22°15' W., 160 lks. dist., marked S 22 E T.

A juniper, 14 ins. diam., bears S. 67°30' W., 118 lks. dist., marked S 21 P T.

51.10 Old road, bears E. and W.

69.60 Small draw near head, 40 ft. below $\frac{1}{2}$ sec. cor., drains W.; ascend a gradual SW. slope, 30 ft. to sec. cor.

80.00 Set an iron post, 3 ft. long, 2 in. diam., 27 ins. in the ground, for cor. of secs. 15, 16, 21 and 22, with brass cap marked

T20 S R 6 W /

S16 | S15

S21 | S22

1934

A juniper, 24 ins. diam., bears N. 59°30' E., 128 lks. dist., marked T 20 S R 6 W S 15 B T.

A juniper, 20 ins. diam., bears S. 87° E., 308 lks. dist., marked T 20 S R 6 W S 22 B T.

A juniper, 8 ins. diam., bears S. 19°30' W., 398 lks. dist., marked T 20 S R 6 W S 21 P T.

A juniper, 12 ins. diam., bears N. 31°45' W., 377 lks. dist., marked T 20 S R 6 W S 16 B T.

Land, rolling sand dunes; drainage, westerly.

Soil, loose, coarse, shifting sand, with a heavy, gray clay subsoil, 3rd rate.

Timber, scattered juniper.

Undergrowth, medium dense sagebrush, 2 to 5 ft. high, yellow top and rabbit brush.

SUBDIVISION OF T. 20 S., R. 6 W.

Chains

Fair grazing land.

S. 89°50' E., on a random line between secs. 15 and 22.

40.00 Set temp. $\frac{1}{2}$ sec. cor.

80.08 Intersect W. and S. line, 12 lks. S. of the cor. of secs. 14, 15, 22 and 23.

Thence

N. 89°55' W., on true line between secs. 15 and 22.

13.30 Over rolling land through scattered timber and undergrowth

Old road, bears NW. and SE.

10.04 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{2}$ sec. cor., with brass cap marked

S15

S22

1934

A juniper, 8 ins. diam., bears S. 20° W., 25 lks. dist., marked S 22 P.T., from which

A juniper, 12 ins. diam., bears N. 12° 30' W., 87 lks. dist., marked S 15 B.T.

Ascend a gentle SE. slope.

40.00 Low ridge, 25 ft. above $\frac{1}{2}$ sec. cor., bears N. and S.; descend a gradual SW. slope.

62.60 Old road, bears N. and S.

20.08 The cor. of secs. 15, 16, 21 and 22, 115 ft. below top of ridge.

Land, rolling sand dunes.

Soil, loose, coarse, shifting sand, with volcanic outcroppings in places, and with a heavy, gray clay subsoil, 3rd rate.

Timber, scattered juniper.

Undergrowth, medium dense sagebrush, 2 to 5 ft. high, and yellow top.

Fair grazing land.

N. 09° 01' W., between secs. 15 and 16.

Over rolling sand dunes, through scattered timber, and medium dense undergrowth; ascend a gentle SW. slope.


40.00 On a gentle SW. slope, 30 ft. above sec. cor.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{2}$ sec. cor., with brass cap marked

SUBDIVISION OF T. 20 S., R. 6 W.

Chains

30.81 One of four rods of steel bears S. 40° 30' E., 250 lks. from which
 dist., marked $\frac{1}{2}$ S 15 B T.




53.00 Low ridge, 45 ft. above $\frac{1}{4}$ sec. cor., bears NW. and SE.;
 descend a gentle NE. slope.

66.10 Old road, bears E. and W.

76.50 Enter timber, bears E. and W.

80.00 On a gentle NE. slope, 20 ft. below top of ridge.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs: 9, 10, 15 and 16, with brass cap marked



from which
 A juniper, 14 ins. diam., bears N. 17° E., 113 lks. dist., marked T 20 S R 6 W S 10 P T.

A juniper, 12 ins. diam., bears S. 71° 30' E., 506 lks. dist., marked T 20 S R 6 W S 15 B T.

A juniper, 20 ins. diam., bears S. 20° 15' W., 233 lks. dist., marked T 20 S R 6 W S 16 B T.

A juniper, 10 ins. diam., bears N. 0° 30' E., 650 lks. dist., marked T 20 S R 6 W S 9 B T.

Land, rolling sand dunes.

Soil, loose, coarse, shifting sand, with outcroppings of volcanic rock in places, and with a heavy, gray clay subsoil, 3rd rate.

Timber, scattered juniper on the S. and N. portions of the mile.

Undergrowth, medium dense sagebrush, 2 to 5 ft. high, rabbit brush and yellow top.

Fair grazing land.

40.00 S. 89° 55' E., on a random line between secs. 10 and 15.
 Set temp. $\frac{1}{4}$ sec. cor.

80.14 Intersect the cpr. of secs. 10, 11, 14, and 15.

Thence

SUBDIVISION OF T. 20 S., R. 6 W.

Chains

N. 89°55' W., on true line between secs. 10 and 15.
Over rolling sand dunes, through scattered timber, and medium dense undergrowth; ascend a gradual E. slope.

14.40 Old road, bears N. and S.

31.40 Top of ascent, 95 ft. above sec. cor., bears N. and S.; descend 30 ft. to $\frac{1}{4}$ sec. cor.

40.07 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked

S10.

S15

1934

A juniper, 22 ins. diam., bears N. 89° E., 227 lks. dist., marked S 10 E T. from which

A juniper, 20 ins. diam., bears S. 28° 15' W., 274 lks. dist., marked S 15 E T.

48.60 Old road, bears N. 20° W. and S.

50.14 The cor. of secs. 9, 10, 15 and 16.

Land, rolling sand dunes.

Soil, loose, coarse, shifting sand, with outcroppings of volcanic rock in places, and with a heavy, gray clay subsoil, 3rd rate.

Timber, scattered juniper.

Undergrowth, medium dense sagebrush, rabbit brush and yellow top.

Fair grazing land.

N. 0° 01' W., between secs. 9 and 10.

Over rolling sandy land, through scattered timber, and medium dense undergrowth; descend a gradual NW. slope.

50.00 on a gradual NW. slope, 90 ft. below sec. cor.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked

S 9 | S10

1934

A juniper, 7 ins. diam., bears S. 28° 15' E., 335 lks. dist., marked S 10 E T. from which

A juniper, 6 ins. diam., bears S. 20° W., 280 lks. dist., marked S 9 E T.

51.10 Old road, bears N. 70° W. and S. 70° E.

SUBDIVISION OF T. 20 S., R. 6 W.

Chains
80.00

Set an iron post, 3 ft. long, 2 ins. diam., 6 ins. in the ground to solid rock, with a volcanic stone, 14x12x4 ins., marked X, deposited alongside, and in a mound of stone, 5 ft. base, to top, for cor. of secs. 3, 4, 9 and 10, with brass cap marked

T20S	R6W
S 4	S 3
S 9	S10
1934	

from which
A juniper, 14 ins. diam., bears N.32°45'E., 661 lks. dist., marked T 20 S R 6 W S 3 B T.

A juniper, 16 ins. diam., bears S.62°15'E., 482 lks. dist., marked T 20 S R 6 W S 10 B T.

A juniper, 26 ins. diam., bears S.80°15'W., 340 lks. dist., marked T 20 S R 6 W S 9 B T.

A juniper, 12 ins. diam., bears N.43°45'W., 266 lks. dist., marked T 20 S R 6 W S 4 B T.

Land, rolling.

Soil, loose, coarse, shifting sand, with outcroppings of volcanic rock in places, and with a heavy, gray clay subsoil, 3rd rate.

Timber, scattered juniper.

Undergrowth, medium dense sagebrush, 2 to 5 ft. high, rabbit brush and yellow top.

Fair grazing land.

S. 89°55' E., on a random line between secs. 3 and 10.

40.00 Set temp. 1/2 sec. cor.

80.14 Intersect N. and S. line, 2 lks. E. of the cor. of secs. 2, 3, 10 and 11.

Thence

N. 89°56' W., on true line between secs. 3 and 10.

Over rolling sandy land, through medium dense undergrowth.

35.00 Enter junipers, bears N. and S.

40.07 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/2 sec. cor., with brass cap marked

1/2 S 3
S10
1934

from which
A juniper, 24 ins. diam., bears S.37°15'E., 658 lks. dist., marked 1/2 S 10 B T.

A juniper, 20 ins. diam., bears N.77°W., 450 lks. dist., marked 1/2 S 3 B T.

55.20 Old road, bears N. 20° E. and S. 20° W.

SUBDIVISION OF T. 20 S., R. 6 W.

Chains

raise a mound of stone, 4 ft. base, 3 ft. high, S. of cor.

From this closing cor. the cor. of secs. 33 and 34, T. 19 S., R. 6 W., bears S. 89°49' E., 1.31 chs. distant.

Land, rolling.

Soil, loose, coarse, shifting sand, with outcroppings of volcanic rock in places, with a heavy, gray clay subsoil, 3rd rate.

Timber, scattered juniper on the S. portion of the mile.

Undergrowth, medium dense sagebrush, 2 to 5 ft. high, and yellow top.

Fair grazing land.

From the standard cor. of secs. 32 and 33, on the E. bdy. of the Tp., heretofore described.

N. 0°02' W., between secs. 32 and 33.

Over rolling land, through scattered timber, and medium dense undergrowth.

25.00 Old road, bears E. and W.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for sec. 60r., with brass cap marked

S32	S33
1934	

from which:
A juniper, 14 ins. diam., bears S. 77°50' W., 108 lbs. dist., marked S 33 E T.

A juniper, 12 ins. diam., bears S. 50°50' W., 115 lbs. dist., marked S 32 E T.

70.80 Ungraded road, between Fillmore, Utah and Clear Lake, Utah, bears N. and SE.

80.00 Set an iron post, 3 ft. long, 2 in. diam., 18 ins. in the ground to bedrock, with a volcanic stone, 14x8x4 ins., marked 4 notches on the E. edge and 1 notch on the S. edge, deposited alongside, and in a large mound of stone to top, for cor. of secs. 28, 29, 32 and 33, with brass cap marked

T20S	R6W
S29	S28
S32	S33
1934	

raise a mound of stone, 4 ft. base, 3 ft. high, N. of cor.

Land, rolling,

Soil, sandy clay loam, with outcroppings of volcanic rock in places, and with a heavy, gray clay subsoil, 3rd rate.

SUBDIVISION OF T. 29 S. 23 E. R. 2

Chains

Timber, scattered juniper, and ...
 Undergrowth, medium dense sagebrush, and yellow top.
 Fair grazing land.

40.00 S. 89°55' E., on a random line between secs. 28 and 33.
 Set temp. 1 sec. cor.

79.26 Intersect N. and S. line, 2 lks. N. of the cor. of secs. 27, 28, 33 and 34.

Thence

N. 89°54' W., on true line between secs. 28 and 33.

Over rolling sand dunes, through scattered timber, and medium dense undergrowth.

2.60 Old road, bears NW. and SE, in draw draining SE.

39.98 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1 sec. cor., with brass cap marked

328
 S33
 1934

A juniper, 10 ins. diam., bears N. 13°45' E., 74 lks. dist., marked 1/2 S 28 B T.

A juniper, 14 ins. diam., bears S. 17° W., 280 lks. dist., marked 1/2 S 33 B T.

71.00 Old road, bears N. 10° E. and S. 10° W.

79.26 The cor. of secs. 28, 29, 32 and 33.

Land, rolling sand dunes.

Soil, loose, coarse, shifting sand, with a heavy, gray clay subsoil, 3rd rate.

Timber, scattered juniper.

Undergrowth, medium dense sagebrush.

Fair grazing land.

N. 0°02' W., between secs. 28 and 29.

Over rolling sand dunes, through scattered timber, and medium dense undergrowth.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1 sec. cor., with brass cap marked

329 | 328
 1934

SUBDIVISION OF T. 20 S., R. 6 W.

79.00 A juniper, 20 ins. diam., bears N. 12° 15' E., 164 lks. from which dist., marked $\frac{1}{2}$ S 28 R T.

79.00 A juniper, 16 ins. diam., bears N. 56° E., 230 lks. dist., marked $\frac{1}{2}$ S 29 R T.

79.10 Old road, bears NW. and S. 70° E.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 20 ins. in the ground to solid rock, and in a large mound of stone to top, for cor. of secs. 20, 21, 28 and 29, with brass cap marked

T20S	R6W
S20	S21
S29	S28
1934	

A juniper, 14 ins. diam., bears N. 40° 30' E., 307 lks. dist., marked T 20 S R 6 W S 21 R T. from which

A juniper, 18 ins. diam., bears S. 52° 45' E., 247 lks. dist., marked T 20 S R 6 W S 28 R T.

A juniper, 14 ins. diam., bears S. 73° 30' E., 126 lks. dist., marked T 20 S R 6 W S 29 R T.

A juniper, 12 ins. diam., bears N. 11° 30' E., 182 lks. dist., marked T 20 S R 6 W S 20 R T.

Land, rolling sand dunes.

Soil, loose, coarse, shifting sand, with a heavy, gray clay subsoil, 3rd rate.

Timber, scattered juniper.

Undergrowth, medium dense sagebrush, 2 to 4 ft high.

Fair grazing land.

S. 89° 54' E., on a random line between secs. 21 and 28.

40.00 Set temp. sec. cor.

79.96 Intersect N. and S. line, 9 lks. N. of the cor. of secs. 21, 22, 27 and 28.

Thence

N. 89° 50' W., on true line between secs. 21 and 28.

Over rolling sand dunes, through scattered timber, and medium dense undergrowth; descend 50 ft. to sec. cor.

31.10 Old road, bears N. 30° E. and S. 20° E.

39.98 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for sec. cor., with brass cap marked

S21
S28
1934

SUBDIVISION OF T. 20 S., R. 6 W.

Chains

A juniper, 14 ins. diam., bears N. 76° E., 21 lks. from which
dist., marked S 21 B T.

A juniper, 24 ins. diam., bears S. 60° E., 50 lks.
dist., marked S 28 B T.

72.96 The cor. of secs. 20, 21, 28 and 29, 90 ft. below 1/2 sec. cor.

Land, rolling sand dunes.

Soil, loose, coarse, shifting sand, with a heavy, gray clay subsoil, 3rd rate.

Timber, scattered juniper.

Undergrowth, medium dense sagebrush, 2 to 4 ft. high.

Fair grazing land.

10000' W., between secs. 20 and 21.

Over rolling land, through scattered timber, and medium dense undergrowth; ascend 35 ft. to 1/2 sec. cor.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/2 sec. cor., with brass cap marked

S20	S21
-----	-----

1934

A juniper, 12 ins. diam., bears N. 34° 30' E., 280 lks. from which
dist., marked S 21 B T.

A juniper, 16 ins. diam., bears S. 1° 30' W., 410 lks.
dist., marked S 20 B T.

74.10 Black volcanic rock point, 60 ft. high; leave junipers, bears T. and W.

42.00 Set an iron post, 3 ft. long, 2 1/2 ins. diam., 27 ins. in the ground, for cor. of secs. 16, 17, 20 and 21, with brass cap marked

T208	RGW
317	316
S20	S21

1934

of stone, 3 ft. base, 3 ft. high, W. of cor. raise a mound

Land, rolling.

Soil, loose, coarse, shifting sand, with outcroppings of volcanic rock, and with a heavy, gray clay subsoil, 3rd rate.

Timber, scattered juniper on the S. portion of the mile.

Undergrowth, medium dense sagebrush, 2 to 4 ft. high.

Fair grazing land.

SUBDIVISION OF T. 20 S., R. 6 W.

Chains

- S. 89°50' E., on a random line between secs. 16 and 21.
 40.00 Set temp. $\frac{1}{2}$ sec. cor.
 79.98 Intersect N. and S. line, 12 lks. N. of the cor. of secs. 15, 16, 21 and 22.

Thence

N. 89°45' W., on true line between secs. 16 and 21.

Over gently rolling land, through scattered timber, and medium dense undergrowth.

- 35.00 Leave junipers, bears NE. and SW.

- 39.99 Set an iron post, 5 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{2}$ sec. cor., with brass cap marked

S16
 S21
 1934

of stone, 3 ft. base, 3 ft. high, W. of cor. raise a mound

- 44.90 Old road, bears NW. and SE.

- 79.98 The cor. of secs. 16, 17, 20 and 21.

Land, gently rolling.

Soil, loose, coarse, shifting sand, with a heavy, gray clay subsoil, 3rd rate.

Timber, scattered juniper on the E. portion of the mile.

Undergrowth, medium dense sagebrush, witch brush and shadeleaf.

Fair grazing land.

N. 0°02' W., between secs. 16 and 17.

Over gently rolling land, through medium dense undergrowth.

- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 17 ins. in the ground to bedrock, and in a mound of stone, 5 ft. base, to top, for $\frac{1}{2}$ sec. cor., with brass cap marked

S17 | S16
 1934

of stone, 3 ft. base, 3 ft. high, W. of cor. raise a mound

- 73.00 South base of ascent, bears E. and W.; ascend a steep S. slope.

- 75.00 Top of ascent, 30 ft. above base of ascent, bears E. and W.; descend a steep N. slope.

- 77.60 North base of descent, 20 ft. below top of ascent, bears E. and W.; enter scattered juniper, bears E. and W.

SUBDIVISION OF T. 20 S. R. 6 W.

Chains
80.00

Set an iron post, 3 ft. long, 2 1/2 ins. diam., 2 ins. in the ground, for cor. of secs. 8, 9, 16 and 17, with brass cap marked

T20S, R6W
S 8 | S 9
S17 | S16
1934

A juniper, 24 ins. diam., bears N. 74° E., 299 lks. dist., marked T 20 S R 6 W S 9 B T. from which

A juniper, 24 ins. diam., bears S. 71° 30' E., 325 lks. dist., marked T 20 S R 6 W S 16 B T.

A juniper, 20 ins. diam., bears S. 84° 30' W., 302 lks. dist., marked T 20 S R 6 W S 17 B T.

A juniper, 18 ins. diam., bears N. 24° 30' W., 302 lks. dist., marked T 20 S R 6 W S 8 B T.

of stone, 2 ft. base, 2 ft. high, W. of cor. raise a mound

Land, gently rolling.

Soil, sandy clay loam, with volcanic rock on the surface in places, 3rd rate.

Timber, scattered juniper on the extreme N. portion of the mile.

Undergrowth, medium dense sagebrush and shadscale.

Fair grazing land.

S. 89° 45' E., on a random line between secs. 9 and 16.

40.00 Set temp. 1 sec. cor.

60.08 Intersect N. and S. line, 2 lks. N. of the cor. of secs. 9, 10, 15 and 16.

Thence

N. 89° 44' W., on true line between secs. 9 and 16.

Over rolling land, through scattered timber, and medium dense undergrowth; ascend a gradual E. slope.

6.20 Top of ascent, 40 ft. above sec. cor., bears N. and S. 20° E.; descend a gradual W. slope.

19.10 Base of descent, 60 ft. below top of ascent, bears N. and S. 20° E.; continue over rolling land.

40.04 Set an iron post, 3 ft. long, 1 in. diam., 2 ins. in the ground to bedrock, and in a mound of stone, 8 ft. base, to top, for 1/2 sec. cor., with brass cap marked

1/2 S 9
S16
1934

A juniper, 14 ins. diam., bears N. 77° E., 673 lks. dist., marked 1/2 S 9 B T. from which

SUBDIVISION OF T. 20 S., R. 6 W.

Chains

Ascend a gentle E. slope.

57.60 Top of ascent, 30 ft. above $\frac{1}{2}$ sec. cor., bears N. 20° W. and S. 20° E.; descend a gradual W. slope.

62.20 Base of descent, 45 ft. below top of ascent, bears N. 20° W. and S. 20° E.

75.10 Old road, bears N. 10° W. and SE.

80.08 The cor. of secs. 8, 9, 16, and 17.

Land, rolling.

Soil, sandy clay loam, with outcroppings of volcanic rock in places, 3rd rate.

Timber, scattered juniper.

Undergrowth, medium dense sagebrush.

Fair grazing land.

N. 0°02' W., between secs. 8 and 9.

Over rolling land, through scattered timber, and medium dense undergrowth; ascend a gradual W. slope.

.20 Old road, bears N. 20° W. and E.

15.00 Top of ascent, 30 ft. above sec. cor., bears E. and W.; descend a gradual W. slope.

23.10 Small draw, 30 ft. below top of ascent, drains W.; ascend a gradual S. slope.

30.50 Top of ascent, 30 ft. above draw, bears N. 40° W. and SE.; descend a gradual W. slope.

40.00 On a gradual W. slope, 40 ft. below top of ascent.

Set an iron post, 3 ft. long, 1 in. dia., 12 ins. in the ground to solid rock, and in a mound of stone, 6 ft. base to top, for sec. cor., with brass cap marked

S 8 | S 9

1074

A juniper, 24 ins. diam., bears N. 60° E., 102 lks. dist., marked S 9 R T.

A juniper, 30 ins. diam., bears S. 21° E., 410 lks. dist., marked S 8 R T.

Thence, over rolling land.

51.60 Old road, bears N. 60° E. and SE.

20.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 4, 5, 8 and 9, with brass cap marked

SUBDIVISION OF T. 20 S., R. 6 W.

Chains

T20S	R6W
S 5	S 4
S 8	S 9
1934	

of stone, 3 ft. base, 3 ft. high, raise a mound of cor.

Land, rolling; drainage, westerly.

Soil, loose, coarse, sand, with outcroppings of volcanic rock in places, 3rd rate.

Timber, very scattered juniper.

Undergrowth, medium dense sagebrush.

Fair grazing land.

S. 89°44' E., on a random line between secs. 4 and 9.

40.00 Set temp. 1 sec. cor.

80.06 Intersect N. and S. line, 5 lks. S. of the cor. of secs. 3, 4, 8 and 10.

Thence

N. 89°46' W., on true line between secs. 4 and 9.

Over rolling land, through very scattered timber, and medium dense undergrowth; ascend 20 ft. to 1 sec. cor.

40.05 Set an iron post, 3 ft. long, 1 in. diam., 8 ins. in the ground to solid rock, and in a mound of stone, 3 ft. base, to top, for 1 sec. cor., with brass cap marked

S 4
S 9
1934

from which
A juniper, 16 ins. diam., bears N. 21° 30' E., 286 lks. dist., marked 1/2 S 4 B T.

A juniper, 16 ins. diam., bears S. 69° 30' E., 424 lks. dist., marked 1/2 S 9 B T.

56.30 Old road, bears N. 30° E. and S. 50° W.

30.06 The cor. of secs. 4, 5, 8 and 9, 20 ft. below 1/2 sec. cor.

Land, rolling.

Soil, loose, coarse, shifting sand, with outcroppings of volcanic rock in places, 3rd rate.

Timber, scattered juniper.

Undergrowth, medium dense sagebrush.

Fair grazing land.

SUBDIVISION OF T. 20 S., R. 6 W.

117°02' W., on true line between secs. 4 and 5.
 over rolling land, through scattered timber, and medium
 dense undergrowth.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$

S 5 | S 4

1934

raise a mound
 of stone, 3 ft. base, 3 ft. high, W. of cor.

80.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the
 ground, for cor. of lots 4 and 5 of sec. 4, and lots 1
 and 8 of sec. 5, with brass cap marked

S 5 - 1 + 4 S 4
 8 5

1934

from which
 A juniper, 12 ins. diam., bears N.49°E., 245 lks.
 dist., marked 4 S 4 B T.

A juniper, 10 ins. diam., bears S.27°E., 404 lks.
 dist., marked 5 S 4 B T.

A juniper, 8 ins. diam., bears S.40°30'W., 202 lks.
 dist., marked 8 S 5 B T.

A juniper, 12 ins. diam., bears N.35°30'W., 356 lks.
 dist., marked 1 S 5 B T.

85.40 Old road, bears NW. and SE.

86.93 Intersect the N. bdy. of the Tp.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in
 the ground, for closing cor. of secs. 4 and 5, with brass
 cap marked

T19S R6W
 S32

S 5 | S 4
 T20S R6W

CC

1934

from which
 A juniper, 14 ins. diam., bears S.45°E., 210 lks.
 dist., marked T 20 S R 6 W S 4 C C B T.

A juniper, 18 ins. diam., bears S.20°W., 204 lks.
 dist., marked T 20 S R 6 W S 5 C C B T.

raise a mound
 of stone, 3 ft. base, 3 ft. high, S. of cor.

From this closing cor. the cor. of secs. 32 and 33, T. 19
 S., R. 6 W., bears S. 89°49' E., 94 lks. distant.

Land, rolling.

Soil, loose, coarse, sand, with volcanic rock on the
 surface in places, 3rd rate.

SUBDIVISION OF T. 20 S. R. 6 W. S. 29

Chains

Timber, scattered juniper, ~~and~~ ~~no~~ ~~...~~ ~~...~~ ~~...~~
 Undergrowth, medium dense, sagebrush, rabbit brush
 Fair grazing land.

From the standard cor. of secs. 31 and 32, on the S. bdy. of the Tp., heretofore described.

N. 0°03' W., between secs. 31 and 32.


Over gently rolling land, through medium dense shadscale.

.60 Old road, bears N. 70° W. and S. 70° E.

23.40 Leave shadscale; enter scattered juniper, and sagebrush, rabbit brush and yellow top, bears E. and W.

30.60 Old road, bears E. and W.

40.00 Set an iron post, 5 ft. long, 1 in. diam., 4 ins. in the ground to bedrock, and in a mound of stone, 6 ft. base, to top, for a sec. cor., with brass cap marked




A juniper, 6 ins. diam., bears N. 44° E., 234 lks. from which dist., marked S 32 R T.

A juniper, 7 ins. diam., bears N. 36° 50' W., 60 lks. dist., marked S 31 R T.

Thence, over rolling SE. slope.

56.20 Old road, bears E. and W.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 29, 30, 31 and 32, with brass cap marked



A juniper, 16 ins. diam., bears N. 21° 15' E., 117 lks. from which dist., marked T 20 S R 6 W S 29 B T.

A juniper, 22 ins. diam., bears S. 15° 45' W., 341 lks. dist., marked T 20 S R 6 W S 32 B T.

A juniper, 18 ins. diam., bears S. 32° 30' W., 490 lks. dist., marked T 20 S R 6 W S 31 B T.

A juniper, 14 ins. diam., bears N. 85° W., 495 lks. dist., marked T 20 S R 6 W S 30 B T.

of stone, 3 ft. base, 3 ft. high, W. of cor.
 Land, gently rolling, with small sand dunes on the N. portion of the mile.

SUBDIVISION OF T. 20 S., R. 6 W.

Chains

Soil, sandy clay loam, with outcroppings of volcanic rock on the S. portion of the mile, 3rd rate; loose, coarse, shifting sand, with outcroppings of volcanic rock in places, on the N. portion of the mile, 3rd rate.

Timber, scattered juniper.

Undergrowth, medium dense shadscale on the S. 23.40 chs., and medium dense sagebrush, 2 to 5 ft. high, rabbit brush and yellow top on the remainder of the mile.

Fair grazing land.

S. 89°50' E., on a random line between secs. 29 and 32.

40.00 Set temp. 1 sec. cor.

80.02 Intersect N. and S. line, 2 lks. N. of the cor. of secs. 28, 29, 32 and 33.

Thence

N. 89°49' W., on true line between secs. 29 and 32.

Over gently rolling land, through scattered timber, and medium dense undergrowth.

28.00 Ungraded road, between Fillmore, Utah and Clear Lake, Utah, bears N. and S. 70° E.

40.01 Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground to solid rock, and in a mound of stone, 6 ft. base to top, for 1 sec. cor., with brass cap marked

$$\begin{array}{r} 1.332 \\ 332 \\ \hline 1064 \end{array}$$

Juniper, 20 ins. diam., bears N. 68° E., 43 lks. dist., marked 1332 S. W., from which

Juniper, 20 ins. diam., bears S. 17° E., 35 lks. dist., marked 1332 S. W.,

raise a mound of stone, 3 ft. base, 3 ft. high, N. of cor.,

80.02 The cor. of secs. 29, 30, 31 and 32,

Land, gently rolling.

Soil, loose, coarse, shifting sand, with outcroppings of volcanic rock in places, with a white clay subsoil, 3rd rate.

Timber, scattered juniper.

Undergrowth, medium dense sagebrush, 2 to 4 ft. high, and yellow top.

Fair grazing land.

SUBDIVISION OF T. 20 S., R. 6 W.

Chains

N. 89°50' W., on a random line between secs. 30 and 31.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

83.29 Intersect the W. bdy. of the Tp., 2 lks. N. of the cor. of secs. 25, 30, 31 and 36, heretofore described.

Thence

S. 89°51' E., on true line between secs. 30 and 31.

Over rolling sand dunes, through scattered timber, and medium dense undergrowth.

43.29 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$ S30

S31

1934

A juniper, 3 ins. diam., bears N. 23°30' E., 360 lks. dist., marked B T. from which

A juniper, 18 ins. diam., bears S. 44°30' E., 490 lks. dist., marked $\frac{1}{4}$ S 31 B T.

of stone, 3 ft. base, 3 ft. high, N. of cor. raise a mound

83.29 The cor. of secs. 29, 30, 31 and 32.

land, rolling sand dunes.

Soil, loose, coarse, shifting sand, with outcroppings of volcanic rock in places, and with a white clay subsoil, 3rd rate.

Timber, scattered juniper.

Undergrowth, medium dense sagebrush, 2 to 5 ft. high, and yellow top.

Fair grazing land.

N. 0°03' W., between secs. 29 and 30.

Over rolling sand dunes, through scattered timber, and medium dense undergrowth.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$

S30 | S29

1934

A juniper, 20 ins. diam., bears S. 87°30' E., 149 lks. dist., marked $\frac{1}{4}$ S 29 B T. from which

A juniper, 16 ins. diam., bears N. 88°15' W., 17 lks. dist., marked $\frac{1}{4}$ S 30 B T.

SUBDIVISION OF T. 20 S., R. 6 W.

Chains

Leave junipers and sagebrush; enter shadscale, bears E. and W.

73.00 Old road, bears E. and W.

74.00 Old road, bears N. 60° W. and S. 60° E.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 12 ins. in the ground to solid rock, with a volcanic stone, 12x9x5 ins., marked X, deposited alongside, and in a mound of stone 5 ft. base, to top, for cor. of secs. 19, 20, 29 and 30, with brass cap marked

T20S	R6W
S19	S20
S30	S29
1934	

A juniper, 6 ins. diam., bears S. 72° W., 460 lks. dist., marked T 20 S R 6 W S 30 E T. from which

A juniper, 12 ins. diam., bears N. 82° 30' W., 853 lks. dist., marked T 20 S R 6 W S 19 E T.

Land, rolling sand dunes on the S. portion of the mile, and rolling land on the remainder of the mile.

Soil, loose; coarse, shifting sand, with outcroppings of volcanic rock in places, and with a white clay subsoil, on the S. portion of the mile, 3rd rate; sandy clay loam with outcroppings of volcanic rock, with a white clay subsoil, on the remainder of the mile, 3rd rate.

Timber, scattered juniper on the S. portion of the mile.

Undergrowth, medium dense sagebrush, 2 to 5 ft. high, rabbit brush and yellow top on the S. portion of the mile; medium dense shadscale on the N. portion of the mile.

Fair grazing land.

S. 82° 42' E., on a random line between secs. 20 and 29.

40.00 Set temp. S. sec. cor.

80.04 Intersect N. and S. line, 7 lks. S. of the cor. of secs. 20, 21, 28 and 29.

Thence

N. 89° 52' W., on true line between secs. 20 and 29.

Over rolling sand dunes, through scattered timber, and medium dense undergrowth.

.80 Old road, bears N. 30° W. and S. 30° E.

40.02 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for S. sec. cor., with brass cap marked

S20
S29
1934

SUBDIVISION OF T. 20 S., R. 6 W.

Chains

from which
A juniper, 24 ins. diam., bears N.2°15'E., 168 lks.
dist., marked S 20 B T.

A juniper, 20 ins. diam., bears S. 10°30' W., 455 lks.
dist., marked S 29 B T.

raise a mound
of stone, 2 ft. base, 2 ft. high, W. of cor.

45.00 Leave sand dunes, junipers and sagebrush; enter shadscale
and sandy clay soil, bears W. and S.

61.80 Ungraded road, between Fillmore, Utah and Clear Lake,
Utah, bears W. and S.

67.00 Old road, bears N. 40° W. and S. 40° E.

70.04 The cor. of secs. 19, 20, 29 and 30.

Land, rolling sand dunes on the E. portion of the mile,
and rolling land on the W. portion of the mile.

Soil, loose, coarse, shifting sand, with a white clay
subsoil, on the E. portion of the mile, 3rd rate; sandy
clay loam, with a white clay subsoil, on the W. portion
of the mile, 3rd rate.

Timber, scattered juniper on the E. portion of the mile.

Undergrowth, medium dense sagebrush, 2 to 5 ft. high,
on the E. portion of the mile, medium dense shadscale on
the W. portion of the mile.

Fair grazing land.

N. 80°51' E., on a random line between secs. 19 and 30.

10.00 Set temp. sec. cor.

17.30 Intersect the W. bdy. of the Tp., 2 lks. S. of the cor.
of secs. 19, 24, 29 and 30, heretofore described.

Thence

N. 80°50' E., on true line between secs. 19 and 30.

Over rolling sandy land, through scattered timber, and
medium dense undergrowth.

17.30 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the
ground, for sec. cor., with brass cap marked

S19
330
1934

from which
A juniper, 8 ins. diam., bears N.14°30'E., 700 lks.
dist., marked S 19 B T.

A juniper, 10 ins. diam., bears S.61°E., 660 lks.
dist., marked S 30 B T.

raise a mound
of stone, 2 ft. base, 2 ft. high, W. of cor.

7.6 SUBDIVISION OF T. 20 S., R. 6 W.

Chain
14.60 Old road, bears N. 20° W. and S. 20° E. Leave junipers
bears N. and S.

83.20 The cor. of secs. 19, 20, 29 and 30.

Land, rolling.

Soil, loose, coarse, shifting sand, with a white clay
subsoil, on the W. 75.00 chs., 4th rate, sandy clay loam
on the remainder of the mile, with a white clay subsoil,
3rd rate.

Timber, scattered juniper on the W. 74.60 chs.

Undergrowth, medium dense sagebrush and shadscale.

Fair grazing land.

N. 0°03' W., between secs. 19 and 20.

Over rolling land, through medium dense undergrowth.

14.70 Old road, bears N. 50° W. and S. 50° E. Enter junipers,
bears E. and W.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the
ground, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$
S19 | S20

1934

from which
A juniper, 14 ins. diam., bears S. 5°45' E., 404 lks.
dist., marked $\frac{1}{4}$ S 20 B T.

A juniper, 16 ins. diam., bears N. 62° W., 347 lks.
dist., marked $\frac{1}{4}$ S 19 B T.

raise a mound
of stone, 3 ft. base, 2 ft. high, W. of cor.

53.00 Ungraded road, between Fillmore, Utah and Clear Lake,
Utah, bears N. 40° W. and S. 40° E.

66.20 Old road, bears W. and S. 80° E.

79.00 Old road, bears E. and S. 60° W.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in
the ground, for cor. of secs. 17, 18, 19 and 20, with
brass cap marked

T20S | R6W
S18 | S17
S19 | S20
1934

from which
A juniper, 10 ins. diam., bears N. 10°45' E., 11.05 chs.
dist., marked T 20 S R 6 W S 17 B T.

A juniper, 8 ins. diam., bears N. 8° W., 805 lks.
dist., marked T 20 S R 6 W S 18 B T.

Chain

of stone, 4 ft. base, 5 ft. high, N. of cor.
 Land, rolling.
 Soil, sandy clay loam, with outcroppings of shale in places, and with a white clay subsoil, 3rd rate.
 Timber, scattered juniper on the N. 25.30 side
 Undergrowth, medium dense sagebrush, shrubs and yellow top.
 Fair grazing land.

S. 89°52' E., on a random line between secs. 17 and 20.

40.00 Set temp. 1 sec. cor.
 60.00 Intersect N. and S. line, 5 lks. S. of the cor. of secs. 15, 17, 20 and 21.

Thence
 N. 89°54' E., on true line between secs. 17 and 20.

Over rolling land, through scattered timber, and medium dense undergrowth.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1 sec. cor., with brass cap marked

S17
 S20
 1234

raise a mound of stone, 3 ft. base, 7 ft. high, N. of cor.

40.50 Old road, bears N. 50° E. and S. 30° W.
 70.00 Old road, bears N. 60° E. and S. 60° W.
 80.00 The cor. of secs. 17, 18, 19 and 20.

Land, rolling.
 Soil, sandy clay, with a white clay subsoil, 3rd rate.
 Timber, scattered juniper.
 Undergrowth, medium dense sagebrush and shrubs.
 Fair grazing land.

N. 89°50' E., on a random line between secs. 18 and 19.

40.00 Set temp. 1 sec. cor.
 61.20 Intersect the N. bdy. of the tp., 2 lks. N. of the cor. of secs. 15, 18, 19 and 24, heretofore described.
 Thence

SUBDIVISION OF T. 20 S., R. 6 W.

Chains

S. 89°51' E., on true line between secs. 18 and 19.

Over rolling sandy land, through scattered timber, and medium dense undergrowth.

43.20

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{2}$ sec. cor., with brass cap marked

S18

S19

1934

A juniper, 8 ins. diam., bears S. 24° W., 334 lks. dist., marked $\frac{1}{2}$ S 19 P T. from which

A juniper, 10 ins. diam., bears N. 35° 15' W., 102 lks. dist., marked $\frac{1}{2}$ S 18 P T.

raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

61.00

Ungraded road, between Fillmore, Utah and Clear Lake, Utah, bears N. 30° W. and S. 30° E.

68.10

Top of ascent, 30 ft. above $\frac{1}{2}$ sec. cor., bears N. and E.; descend 10 ft. to sec. cor.

73.40

Old road, bears N. 30° W. and S. 30° E.

83.20

The cor. of secs. 17, 18, 19 and 20.

Land, rolling.

Soil, loose, coarse, shifting sand, with a white clay subsoil, 3rd rate.

Timber, scattered juniper.

Undergrowth, medium dense sagebrush, 2 to 5 ft. high, shadscale and yellow top.

Fair grazing land.

N. 0°03' W., between secs. 17 and 18.

Over rolling land, through very scattered timber, and medium dense undergrowth.

40.00

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{2}$ sec. cor., with brass cap marked

S18 | S17

1934

A juniper, 20 ins. diam., bears N. 4° E., 690 lks. dist., marked $\frac{1}{2}$ S 17 P T. from which

A juniper, 16 ins. diam., bears S. 81° 45' W., 943 lks. dist., marked $\frac{1}{2}$ S 18 P T.

raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

SUBDIVISION OF T. 20 S. R. 6 W.

Chains
20.00

Set an iron post, 3 ft. long, 2 ins. diam., in the ground, for cor. of secs. 7, 8, 17 and 18, with brass cap marked

T20S R6W

S 7 | S 8

S 18 | S 17

1934

A juniper, 7 ins. diam., bears N. 45° E., 205 lks. from which dist., marked T 20 S R 6 W S 8 B T.

A juniper, 10 ins. diam., bears N. 85° 15' W., 886 lks. dist., marked T 20 S R 6 W S 7 B T.

of stone, 4 ft. base, 3 1/2 ft. high, W. of cor. raise a mound

land, rolling.

Soil, sandy clay loam, with a white clay subsoil, 3rd rate.

Timber, very scattered juniper.

Undergrowth, medium dense shadscale, yellow top and rabbit brush.

Fair grazing land.

S. 29° 54' E., on a random line between secs. 8 and 17.

40.00 Set temp. 1 sec. cor.

60.00 Intersect N. and S. line, 5 lks. S. of the cor. of secs. 8, 9, 16 and 17.

Thence

N. 20° 56' W., on true line between secs. 8 and 17.

Over rolling sand dunes, through scattered timber, and medium dense undergrowth.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1 sec. cor., with brass cap marked

S 8

S 17

1934

A juniper, 20 ins. diam., bears N. 83° 15' E., 201 lks. from which dist., marked T 20 S R 6 W S 8 B T.

A juniper, 20 ins. diam., bears S. 85° 30' E., 140 lks. dist., marked T 20 S R 6 W S 17 B T.

54.20 Old road, bears N. 30° E. and S. 60° W.

60.30 Old road, bears N. 20° W. and S. 20° E.

80.00 The cor. of secs. 7, 8, 17 and 18.

Land, rolling sand dunes.

SUBDIVISION OF T. 20 S., R. 6 W.

Chains

Soil, loose, coarse, shifting sand, with a white clay subsoil, 3rd rate.

Timber, scattered juniper.

Undergrowth, medium dense sagebrush and yellow top.

Fair grazing land.

N. 89°51' W., on a random line between secs. 7 and 18.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

83.12 Intersect the W. bdy. of the Tp., 5 lks. W. of the cor. of secs. 7, 12, 13 and 18, heretofore described.

Thence

S. 89°53' E., on true line between secs. 7 and 18.

Over rolling land, through scattered timber, and medium dense undergrowth.

43.12 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked

S 7
—
S 18
1934

A juniper, 24 ins. diam., bears N. 9° E., 23 lks. dist., marked $\frac{1}{4}$ S 7 B T. from which

A juniper, 12 ins. diam., bears S. 47° 45' W., 451 lks. dist., marked $\frac{1}{4}$ S 18 B T.

raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

83.12 The cor. of secs. 7, 8, 17 and 18.

Land, rolling.

Soil, sandy clay loam, with a white clay subsoil, 3rd rate.

Timber, scattered juniper.

Undergrowth, medium dense sagebrush, shadscale and yellow top.

Fair grazing land.

N. 0°03' W., between secs. 7 and 8.

Over rollig land, through very scattered timber, and medium dense undergrowth.

31.50 Old road, bears N. 40° W. and S. 40° E.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked

-SUBDIVISION OF T. 20 S., R. 6 W.

Chains

S 7 | S 8
1934

A juniper, 16 ins. diam., bears S.12°15'E., 485 lks. from which
dist., marked $\frac{1}{2}$ S 8 B T.

A juniper, 8 ins. diam., bears S.36°W., 614 lks.
dist., marked $\frac{1}{2}$ S 7 B T.

of stone, 2 ft. base, 2 ft. high, W. of cor. raise a mound

45.00 Leave timber, bears E. and W.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the
ground, for cor. of secs. 5, 6, 7 and 8, with brass cap
marked

T20S R6W
S 6 | S 5
S 7 | S 8
1934

A juniper, 6 ins. diam., bears N.20°30'E., 994 lks. from which
dist., marked B T.

A juniper, 12 ins. diam., bears S.5°30'W., 931 lks.
dist., marked T 20 S R 6 " S 7 B T.

of stone, 3 ft. base, 3 ft. high, W. of cor. raise a mound

Land, rolling.

Soil, sandy clay loam, with a white clay subsoil, 3rd
rate.

Timber, very scattered juniper on the S. portion of the
mile.

Undergrowth, medium dense sagebrush, shadscale and yellow
top.

Fair grazing land.

S. 89°56' E., on a random line between secs. 5 and 8.

40.00 Set temp. $\frac{1}{2}$ sec. cor.

80.00 Intersect N. and S. line, 5 lks. S. of the cor. of secs.
4, 5, 8 and 9.

Thence

N. 89°58' W., on true line between secs. 5 and 8.

Over rolling land, through scattered timber, and medium
dense undergrowth.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the
ground, for $\frac{1}{2}$ sec. cor., with brass cap marked

SUBDIVISION OF T. 20 S., R. 6 W.

Chains

S 5

S 8

1934

A juniper, 18 ins. diam., bears N. 44° 30' E., 232 lks. from which dist. marked $\frac{1}{2}$ S 5 B T.

A juniper, 24 ins. diam., bears S. 39° 30' W., 562 lks. dist. marked $\frac{1}{2}$ S 8 B T.

50.00

The cor. of secs. 5, 6, 7 and 8.

Land, rolling.

Soil, sandy clay loam, with a white clay subsoil, 3rd rate.

Timber, scattered juniper.

Undergrowth, medium dense sagebrush and yellow top.

Fair grazing land.

40.00

N. 89° 53' W., on a random line between secs. 6 and 7.

Set temp. sec. cor.

83.00

Intersect the W. bdy. of the Tp., 5 lks. S. of the cor. of secs. 1, 6, 7 and 12, heretofore described.

Thence

S. 89° 51' E., on true line between secs. 6 and 7.

Over rolling land, through scattered timber, and medium dense undergrowth.

43.00

Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground to bedrock, with a volcanic stone, 4x4x3 ins., marked X, deposited at the base, and in a mound of stone, 10 ft. base, to top, for $\frac{1}{2}$ sec. cor., with brass cap marked

S 6

S 7

1934

73.00

Road, bears N. 30° W. and S. 20° E.

83.00

The cor. of secs. 5, 6, 7 and 8, 30 ft. above $\frac{1}{2}$ sec. cor.

Land, rolling.

Soil, sandy clay loam, with a white clay subsoil, 3rd rate.

Timber, scattered juniper.

Undergrowth, medium dense sagebrush and yellow top.

Fair grazing land.

45.00

N. 0° 00' W., on a random line between secs. 5 and 6.

Set temp. $\frac{1}{2}$ sec. cor.

SUBDIVISION OF T. 20 S., R. 6 W.

Chains

87.20 Intersect the N. bdy. of the Tp., 38 lks. W. of the cor. of secs. 5, 6, 31 and 32, heretofore described.

Thence

S. 0°13' W., on true line between secs. 5 and 6.

Over rolling sandy land, through very scattered timber, and medium dense undergrowth.

7.20 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for cor. of lots 4 and 5 of sec. 5, and lots 1 and 8 of sec. 6, with brass cap marked

S6 1 4
8 5
1934

A juniper, 4 ins. diam., bears S. 60°30' W., 440 lks. dist., marked B T.

raise a mound of stone, 4 ft. base, 3 ft. high, W. of cor.

13.20 Old road to Clear Lake, Utah, bears N. 75° E. and S. 75° W.

47.20 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/4 sec. cor., with brass cap marked

S 6 | S 5
1934

A juniper, 10 ins. diam., bears N. 50°45' E., 516 lks. dist., marked S 5 B T.

A juniper, 20 ins. diam., bears N. 14°30' W., 679 lks. dist., marked S 6 B T.

87.20 The cor. of secs. 5, 6, 7 and 8.

Land, rolling.

Soil, sandy clay loam, with a white clay subsoil, 3rd rate.

Timber, very scattered juniper.

Undergrowth, medium dense sagebrush, and yellow top.

Fair grazing land.

GENERAL DESCRIPTION OF T. 20 S., R. 6 W.

The extreme eastern and southern portions of this township are gently rolling land, the remainder of the township is rolling sand dunes. The township has an approximate elevation of 5500 feet above sea level, and is generally exposed to the south. No definite drainage systems are in evidence in the township. There is a clay basin, Devils Kitchen, located along the south boundary in the eastern portion of section 34 and the western

GENERAL DESCRIPTION OF T. 20 S., R. 6 W.

portion of section 35, and extends into the southeastern portion of section 27, this basin is surrounded by a volcanic rim on the eastern and southern rims, and by rolling land on the north and west.

The soils of the extreme eastern and southern portions of the township are a sandy clay loam, with outcroppings of volcanic rock in places, and with a heavy, gray clay subsoil; there is a strip of volcanic surface rock along the south boundary of section 33. The western and northwestern portions is a sandy clay loam, with outcroppings of volcanic rock in places, and with a white clay subsoil, the remainder of the township is loose, coarse, shifting sand, with outcroppings of volcanic rock in places, and with a heavy, gray clay subsoil. The township is probably underlain with lava flow; and the soil in general may be classed as 3rd rate.

The soil throughout the township supports a medium dense growth of sagebrush, 2 to 5 ft. high, yellow top and rabbit brush, with shadscale in the southern, northeastern and northwestern portions, and with scattered patches of greasewood along parts of the eastern and northern portions, affording fair grazing for stock during the winter months.

There is a scattered growth of juniper throughout most of the township, this timber has ~~no~~ commercial value only as fuel.

An ungraded road, between Fillmore, Utah and Clear Lake, Utah; entering the township on the south boundary about 15.00 chs. west of the standard $\frac{1}{4}$ section corner of section 35, and bearing northwesterly, leaving the township on the west boundary near the corner of sections 7, 12, 13, and 18. There are numerous other old roads throughout the township, used by settlers to gather the juniper timber for fuel.

This township is not suitable for cultivation by reason of the absence of water and the continuously shifting sand dunes.

No water was noted in the township, neither were there any settlers living in the township at the time of the survey. There are numerous flowing wells to the east and southeast of this township.

In general the township is suited for grazing sheep and cattle during the winter months or in the seasons when snow is available for water.

There is a trench, 50 ft. long, 5 ft. wide, and 3 ft. deep, located near the $\frac{1}{4}$ section corner of section 6, on the west boundary of the township, and a white chalky substance has been uncovered.

No indications of mineral, coal, oil or oil shale was observed in the township.

The mean magnetic declination was found to be 16°15' E.

... into the ...
... at hand ...

Blank

Page

CERTIFICATE OF UNITED STATES SURVEYOR

Andrew Nelson, U.S. Cadastral Engineer,
We, Sidney R. Reese, and Harry Demarest, Transitmen,
(temporary) C.W.A., U.S. Surveyor, hereby certify upon honor that, in pursuance

of special instructions received from the District Cadastral Engineer for Utah

bearing date of the 15 day of December, 1933, we have well, faithfully, and truly

in our own proper person, and in strict conformity with said instructions, the Manual of Surveying Instruc-
tions, and the laws of the United States, surveyed all those parts or portions of Dependent resurvey
of the Fourth Standard Parallel South, along the south boundary of T. 20
S., R. 6 W., north boundary and portions of the east boundary or First
Guide Meridian West, independent resurvey of portion of the east
boundary or First Guide Meridian West, and survey of the west boundary
and subdivision of T. 20 S., R. 6 W. of the Salt Lake

Meridian, in the State of Utah, which are represented in

the foregoing field notes as having been executed by US and under OUR direction; and that all the corners of
said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instruc-
tions, and the special written instructions of the District Cadastral Engineer for Utah

and in the specific manner described in the field notes, and that the foregoing are the original field notes of
such survey.

Certified to at
Salt Lake City, Utah
April 27, 1935

Andrew Nelson, U.S. Cadastral Engineer
Sidney R. Reese
Harry Demarest, U.S. Surveyor.
Transitmen, (temporary) C.W.A.

APPROVAL

OFFICE OF U. S. SUPERVISOR OF SURVEYS,
Denver, Colorado MAY 25 1935

The foregoing field notes of the survey of Dependent resurvey of the Fourth Standard
Parallel South, along the south boundary of T. 20 S., R. 6 W., north
boundary and portions of the east boundary or First Guide Meridian West,
independent resurvey of portion of the east boundary or First Guide
Meridian West, and survey of the west boundary and subdivision of
T. 20 S., R. 6 W., Salt Lake Meridian,

Andrew Nelson, U.S. Cadastral Engineer, Sidney R. Reese and
executed by Harry Demarest, Transitmen, (temporary) C.W.A.
under their special instructions dated December 15, 1933, having been
critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys
they describe, are hereby approved.

U. S. Supervisor of Surveys.

I certify that the foregoing transcript of the field notes of the above described surveys in
has been correctly copied from the original notes on file in this office.