

Volume

#

R0522

BOOK A-522

4-879 b

INDEX DIAGRAM.

Township 28 South, Range 14 West

| | | | | | | | | | | | | |
|----|-----|-----|-----|----|----|----|----|----|----|----|----|----|
| | 40 | 44 | 43 | 44 | 40 | 39 | | | | | | |
| 56 | 6 | 107 | 8 | 93 | 4 | 83 | 8 | 74 | 2 | 65 | 1 | 35 |
| | 106 | | 105 | | 92 | | 82 | | 72 | | 64 | |
| 54 | 7 | 105 | 8 | 91 | 9 | 81 | 10 | 71 | 11 | 63 | 12 | 34 |
| | 104 | | 103 | | 90 | | 80 | | 70 | | 62 | |
| 53 | 18 | 102 | 17 | 89 | 16 | 80 | 15 | 70 | 14 | 62 | 13 | 32 |
| | 101 | | 100 | | 88 | | 79 | | 79 | | 61 | |
| 52 | 19 | 99 | 20 | 87 | 21 | 78 | 22 | 69 | 23 | 60 | 24 | 30 |
| | 98 | | 97 | | 86 | | 77 | | 68 | | 59 | |
| 50 | 20 | 96 | 29 | 85 | 28 | 77 | 27 | 67 | 26 | 58 | 25 | 27 |
| | 95 | | 95 | | 85 | | 76 | | 66 | | 58 | |
| 49 | 21 | 94 | 28 | 84 | 28 | 75 | 24 | 65 | 25 | 57 | 26 | 26 |
| | 24 | | 83 | | 83 | | 81 | | 80 | | 19 | |

Blank

Page

BOOK A-522

4-879 b

INDEX DIAGRAM.

Township 30 South, Range 14 West

| | 123 | 122 | 121 | 120 | 119 | 118 | 117 |
|-----|-----|-----|-----|-----|-----|-----|-----|
| 131 | 6 | 96 | 5 | 179 | 4 | 166 | 3 |
| | 195 | 94 | | 178 | | 166 | 154 |
| 129 | 7 | 193 | 8 | 177 | 9 | 165 | 10 |
| | 192 | 191 | | 175 | | 164 | 152 |
| 128 | 10 | 190 | 17 | 174 | 16 | 162 | 15 |
| | 181 | 87 | | 173 | | 161 | 150 |
| 127 | 19 | 186 | 20 | 172 | 21 | 160 | 20 |
| | 185 | 184 | | 171 | | 159 | 148 |
| 125 | 20 | 183 | 29 | 170 | 28 | 157 | 27 |
| | 182 | 181 | | 169 | | 156 | 146 |
| 124 | 31 | 180 | 33 | 167 | 32 | 156 | 34 |

Blank

Page

BOOK A-522

4-679 b

INDEX DIAGRAM.

Township 29 South, Range 14 West

| | 271 | 271 | 270 | 270 | 269 | 269 |
|-----|-----------|---------------|---------------|---------------|---------------|---------------|
| 211 | 6 266 | 267 5 266 | 251 4 250 | 240 8 239 | 23 9 230 | 228 1 221 |
| 210 | 7 265 | 265 8 263 | 249 9 248 | 239 10 239 | 229 11 229 | 219 12 218 |
| 209 | 18 261 | 262 17 260 | 247 16 246 | 237 15 236 | 228 14 227 | 218 18 217 |
| 208 | 19 258 | 259 20 257 | 245 21 244 | 235 22 235 | 227 23 226 | 216 24 215 |
| 207 | 20 255 | 256 29 254 | 243 28 242 | 234 27 233 | 225 26 224 | 215 25 214 |
| 206 | 21 253 | 253 28 252 | 241 28 240 | 232 24 231 | 223 25 222 | 213 26 212 |

Blank

Page

522

4-879 b

INDEX DIAGRAM.

Township 6 South, Range 24 East

| | | | | | | |
|-----|-----|-----|-----|-----|-----|-----|
| | 6 | 5 | 4 | 3 | 2 | 1 |
| | 7 | 8 | 9 | 10 | 11 | 12 |
| | 13 | 14 | 15 | 16 | 17 | 18 |
| | 19 | 20 | 21 | 22 | 23 | 24 |
| | 303 | 301 | 300 | 299 | 297 | 295 |
| 292 | 290 | 292 | 291 | 289 | 288 | 287 |
| | 322 | 321 | 320 | 319 | 318 | 317 |
| 291 | 289 | 288 | 287 | 285 | 284 | 283 |
| | 289 | 288 | 287 | 285 | 284 | 283 |

Blank

Page

4-679 b

INDEX DIAGRAM.

Township 7 South, Range 24 East

| | 418 | 418 | 418 | 419 | 419 | 419 |
|-----|-----------|---------------|---------------|---------------|---------------|---------------|
| 342 | 6 414 | 415 5 412 | 395 4 393 | 381 8 379 | 368 2 367 | 355 1 354 |
| 341 | 7 410 | 411 8 409 | 392 9 391 | 377 10 376 | 365 11 364 | 353 12 351 |
| 339 | 18 406 | 417 17 405 | 390 16 389 | 375 15 374 | 363 14 362 | 350 18 349 |
| 338 | 19 403 | 404 20 402 | 388 21 387 | 374 22 373 | 361 23 361 | 348 24 347 |
| 336 | 20 399 | 400 29 398 | 385 28 384 | 372 27 371 | 359 26 358 | 346 25 346 |
| 335 | 21 397 | 397 22 396 | 383 28 382 | 370 24 369 | 357 25 356 | 344 26 343 |

Blank

Page

BOOK A-522

4-679 b

INDEX DIAGRAM.

Township 5 South, Range 20 East

| | | | | | | |
|-----|-----------|-----------|-----------|-----------|-----------|-----------|
| | 442 | 441 | 440 | 440 | 439 | 438 |
| 444 | 6 504 | 5 503 | 4 487 | 8 478 | 2 469 | 1 459 |
| 445 | 7 500 | 8 499 | 9 485 | 10 476 | 11 467 | 12 457 |
| 446 | 18 497 | 17 496 | 16 484 | 15 475 | 14 466 | 13 455 |
| 447 | 19 494 | 20 493 | 21 482 | 22 473 | 23 464 | 24 453 |
| 448 | 80 491 | 29 490 | 28 480 | 27 472 | 26 462 | 25 451 |
| 449 | 81 | 32 489 | 83 479 | 84 471 | 85 461 | 86 450 |
| | 436 | 435 | 434 | 433 | 432 | 432 |

Blank

Page

BOOK A-522

BOOK "A"

FIELD NOTES

OF THE

RESURVEY OF THE NORTH, SOUTH, EAST, AND WEST BOUNDARIES, AND

SURVEY OF THE SUBDIVISION OF T. 28 S., R. 14 W.

Of the SALT LAKE Meridian,

In the State of UTAH

EXECUTED BY

Elliot Bird, U. S. Surveyor

Edward Eliason, Transitman

Hoffman C. Hughes, Transitman

Under special instructions dated July 29, 1936, which provided for the surveys included under Group No. 270, bearing the approval of the Commissioner of the General Land Office under date of Sept. 12, 1936 and assignment instructions dated Oct. 30, 1936

Survey commenced Nov. 19, 1936

Survey completed Dec. 22, 1936

INDEX DIAGRAM.

Township 28 South, Range 14 West

| | | | | | | | | | | | | |
|----|----|----|----|----|----|----|----|----|----|----|----|----|
| | 30 | | 28 | | 27 | | 25 | | 24 | | 23 | |
| 40 | 6 | 91 | 5 | 77 | 4 | 67 | 3 | 58 | 2 | 49 | 1 | 19 |
| | 90 | | 89 | | 76 | | 66 | | 57 | | 48 | |
| 38 | 7 | 89 | 8 | 75 | 9 | 65 | 10 | 56 | 11 | 47 | 12 | 18 |
| | 88 | | 87 | | 74 | | 64 | | 55 | | 46 | |
| 37 | 13 | 86 | 17 | 73 | 16 | 64 | 15 | 55 | 14 | 46 | 13 | 16 |
| | 85 | | 84 | | 72 | | 63 | | 54 | | 45 | |
| 36 | 19 | 83 | 20 | 71 | 21 | 62 | 22 | 53 | 23 | 44 | 24 | 14 |
| | 82 | | 81 | | 70 | | 61 | | 52 | | 43 | |
| 34 | 30 | 80 | 29 | 69 | 28 | 61 | 27 | 51 | 26 | 42 | 25 | 11 |
| | 79 | | 79 | | 69 | | 60 | | 50 | | 42 | |
| 33 | 31 | 78 | 32 | 68 | 33 | 59 | 34 | 49 | 35 | 41 | 36 | 10 |
| | 8 | | 7 | | 6 | | 5 | | 4 | | 3 | |

T. 28 S., R. 14 W.

| | | | | | |
|----|----|----|----|----|----|
| 6 | 5 | 4 | 3 | 2 | 1 |
| 7 | 8 | 9 | 10 | 11 | 12 |
| 18 | 17 | 16 | 15 | 14 | 13 |
| 19 | 20 | 21 | 22 | 23 | 24 |
| 30 | 29 | 28 | 27 | 26 | 25 |
| 31 | 32 | 33 | 34 | 35 | 36 |

Lines colored red were surveyed by Edward Eliason,
Transitman. (Temporary)

Lines colored black were surveyed by Elliot Bird,
U.S. Surveyor, and
Hoffman C. Hughes,
Transitman. (Temporary)

| | | | |
|--|--|--|--|
| | | | |
|--|--|--|--|

TOWNSHIP 28 SOUTH, RANGE 14 WEST

Chains

The survey of T.28 S., R.14 W., Salt Lake Meridian, Utah, was commenced November 19, 1936, and executed with a Buff and Buff transit No. 18003, used by Elliot Bird, U. S. Surveyor, and Hoffman C. Hughes, Temporary Transitman, and a Buff and Buff transit No. 16725, used by Edward Eliason, Temporary Transitman. The instruments are equipped with Smith solar attachments and full vertical circles. The horizontal limbs are provided with two double verniers placed opposite to each other and reading to single minutes of arc, which is also the least count of the verniers of the latitude and declination arcs and vertical circles.

The instruments were approved for use on this survey, conditional upon satisfactory field tests, by the district cadastral engineer for Utah, in assignment instructions dated October 30, 1936. During the progress of this survey, the solar attachments were not used, and all azimuths in this record are referred to true meridians determined by observations on Polaris made during the progress of the survey, by the method of deflection angles on a number of courses, and the lines of the survey were deflected by fore and back sights. The instruments were in good condition and adjusted at the time of the survey, and an arcus hori angle observation was made on Polaris to determine true meridian from which the lines of the survey were deflected, both of which are given as follows.

December 7, 1936: Stationed at the cor. of sps. 27 and 28 S., R. 14 and 15 W., Salt Lake Meridian, Utah, in approximate latitude 39°24'N., longitude 111°20'W., with transit No. 18003, at 10h 30.2m a.m. by my watch which carries correct 105th meridian time, comparison being made with Naval Observatory time signals over radio station T.S.L., on December 9, I make an hour angle observation on Polaris east of the meridian, making four observations, two each with the telescope in direct and reversed positions reading the horizontal deflection angle from a point on the horizon about 6 miles distant to the N., in the

| | |
|---|--------------|
| Local hour angle of Polaris | 111° 20' 00" |
| Hour angle of Polaris | 111° 20' 00" |
| True horizontal deflection angle from the pole to Polaris | 0° 00' 00" |
| Azimuth of Polaris | 8° 00' 00" |
| True meridian of the pole | North |

In order to verify the local hour angle observation, I take an hour angle observation on the sun near latitude 36° observing the altitude of the sun's lower limb of the transit in direct position, reverse the telescope and observe the sun's upper limb.

| | |
|------------------------------------|-------------|
| Apparent time of observation, noon | 12h 00m 00s |
| Hour observed altitude | 36° 3' |
| Reduced latitude | 36° 18' N. |

December 10, 1936: Stationed at the cor. of sps. 27 and 28 S., R. 14 and 15 W., Salt Lake Meridian, Utah, in approximate latitude 39°24'N., longitude 111°20'W., with transit No. 18003, at 10h 30.0m a.m. by my watch which carries correct 105th meridian time, comparison being made with Naval Observatory time signals over radio station T.S.L., on December 9, I make an hour angle observation on Polaris east of the meridian, making four observations, two each with the telescope in direct and reversed positions reading the horizontal deflection angle from a point on the horizon about 6 miles distant to the N., in the

TOWNSHIP 28 SOUTH, RANGE 14 WEST

Chains

direction E. to Polaris.

| | |
|---|----------------|
| Watch fast of l.m.t. ----- | 00h 33.8m |
| Local mean time of observation ----- | 10h 14.8m A.M. |
| Hour angle of Polaris ----- | 10h 8.3m |
| Mean horizontal deflection angle from reference point to Polaris ----- | 0° 36'E. |
| Azimuth of Polaris ----- | 0° 36'E. |
| True bearing of reference point ----- | North |

Unless otherwise specified, all measurements were made with Lallie steel tapes 5 and 8 chains in length compared with a Lufkin standard steel tape 1 chain in length and found to be correct. The measurements were made on the slope, the vertical angle determined with clinometers and the slope measurements reduced to true horizontal distances which only appear in these notes.

INDEPENDENT RESURVEY OF SOUTH BDY. OF T.28 S., R.14 W.

Independent resurvey, superseding the surveys executed by E. L. Ericzon, U. S. Deputy Surveyor, in 1875, and resurveyed by T. C. Bailey, U. S. Deputy Surveyor, in 1882.


From the cor. of Tps. 28 and 29 S., Rs. 14 and 15 W., hereinafter described, I deflect an angle of 90°00' to the east of the true meridian established by observation on Polaris, heretofore described:

Thence

East, on a random line, setting temp. $\frac{1}{2}$ sec. and sec.cors on the parallel at intervals of 40.00 chs., on line bet. Tps. 28 and 29 S., R.14 W. At 478.86 chs., the parallel intersects the E. bdy. of T. 28 S., R.14 W., 6.46 chs. N. of the SW. cor. T. 28 S., R.13 W., which is an iron post 3 ins. diam., firmly set, mkd. and witnessed as described in the official record of the survey of T. 29 S., R.13 W. Group 271, Utah, which is established at the intersection of a line projected S. from the cor. of secs. 19 and 30, T.28 S., R.13 W., with a line projected W. from the cor. of Tps. 28 and 29 S., Rs. 12 and 13 W.

At point of intersection

Set an iron post, 3 ft. long, 3 ins. diam., 27 ins. in the ground, for closing cor. of Tps. 28 and 29 S., R.14 W. with brass cap marked

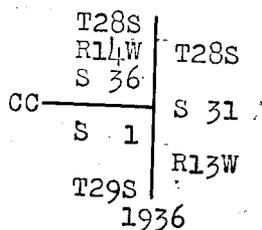

raise a mound

INDEPENDENT RESURVEY OF SOUTH BDY. OF T. 28 S., R. 14 W.

Chains

of stone 3½ ft. base, 3 ft. high, W. of cor.

Thence

From the closing cor. of Tps. 28 and 29 S., R. 14 W.

West, on true line along the S. bdy. sec. 36, T. 28 S., R. 14 W.

Over low, rolling hills, through very scattering timber and dense short undergrowth; desc. gradual W. slope.

3.90 Dim road, bears NW. and SE.

8.10 Wash, 50 lks. wide, 4 ft. deep, drains N. 30°W.; leave timber, bears N. and S.; asc. gradual NE. slope.

35.00 Spur, 60 ft. above wash, slopes N., about 10.00 chs. dist. to end; desc. gradual NW. slope.

40.00 On gradual NW. slope, 10 ft. below spur.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for ¼ sec. cor. sec. 36, with brass cap mkd.

¼ S36

1936

raise a mound

of stone; 3 ft. base, 2½ ft. high, N. of cor.

From this cor. the original ¼ sec. cor. bears S. 8°W., 5.42 chs. dist.

Cor. is a volcanic stone, 15x10x10 ins., firmly set and properly mkd.

I deposit this cor. alongside iron post.

74.00 Shallow draw, 10 ft. below ¼ sec. cor., drains NW.

80.00 On gentle W. slope.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 35 and 36, with brass cap mkd.

T28S R14W

S35|S36

S2

T29S R14W

1936

raise a mound

of stone, 3 ft. base, 2½ ft. high, N. of cor.

No trace of the original sec. cor. could be found.

Land, gently rolling and hilly, with general northwesterly exposure and drainage.

Soil, light colored sandy clay loam, from 1 to 4 ft. deep, mixed with rock and gravel; 3rd rate. Volcanic and quartzite formation.

Undergrowth, sagebrush, yellowtop, shadscale, Russian thistle, weeds and grass.

INDEPENDENT RESURVEY OF SOUTH BDY. OF T. 28 S., R. 14 W.

Chains'

arino

Timber, juniper on E. portion of mile.

Fair winter grazing land.

West, along the S. bdy. sec. 35, T. 28 S., R. 14 W.

Over gently rolling land, through dense short undergrowth.

4.50 Traveled road, bears N. 10°W. and S. 10°E.

25.00 Wash, 150 lks. wide, 5 ft. deep, drains N. 10°W.; asc. gradually across wide valley; locally known as Wah Wah Valley.

40.00 On gentle E. slope

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor. sec. 35, with brass cap mkd.
$$\frac{1}{4} \text{ S35}$$

$$\underline{\quad\quad\quad}$$
 1936

raise a mound

of stone, 4 ft. base, 3 ft. high, N. of cor.

From this cor. the original $\frac{1}{4}$ sec. cor. bears S. 15°15'W., 5.70 chs. dist.

Cor. is a volcanic stone, 18x12x10 ins., firmly set and properly mkd.

I deposit this cor. alongside iron post.

63.50 Draw, 10 ft. deep, drains NE.

80.00 On gentle NE. slope.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for the cor. of secs. 34 and 35, with brass cap mkd.

T28S R14W

$$\frac{\text{S34} | \text{S35}}{\text{S3}}$$

T29S R14W

1936

raise a mound

of stone, 4 ft. base, 3 ft. high, N. of cor.

From this cor. the original sec. cor. bears S. 17°W., 5.80 chs. dist.

Cor. is a volcanic stone 12x10x6 ins., firmly set and properly mkd.

I deposit this cor. alongside iron post.

Land, gently rolling valley, with general northerly exposure and drainage.

Soil, light colored sandy clay, from 1 to 4 ft. deep, mixed with rock and gravel, with a rocky surface; 3rd rate. Volcanic formation.

INDEPENDENT RESURVEY OF SOUTH BDY. OF T. 28 S., R. 14 W.

Chains

Undergrowth, sage and blackbrush, shadscale, yellowtop, Russian thistle, grass and weeds.

No timber.

Fair winter grazing land.

West, along the S. bdy. sec. 34, T. 28 S., R. 14 W.

Over gently rolling bottom of wide valley, through dense short undergrowth.

16.00 Base of gradual ascent over NE. slope, bears NE. and SW.

38.00 Top of ascent on hill, 20 ft. high, slopes N., 3.00 chs. dist. to end; desc. gradual NW. slope.

40.00 On gradual NW. slope, 10 ft. below top of ascent.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$\frac{1}{4}$ S34
1936

raise a mound

of stone, 4 ft. base, 3 $\frac{1}{2}$ ft. high, N. of cor.

From this cor. the original $\frac{1}{4}$ sec. cor., bears S. 18°W., 6.10 chs. dist.

Cor. is a volcanic stone, 16x10x8 ins., firmly set and properly mkd.

I deposit this cor. alongside iron post.

Continue gradual descent over NW. slope.

43.00 Draw, 20 ft. below $\frac{1}{4}$ sec. cor., drains NE.

67.50 Wash, 20 lks. wide, 3 ft. deep, drains NE.

80.00 On nearly level land.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 33 and 34, with brass cap mkd.

T28S R14W
S33 | S34
34
T29S R14W
1936

raise a mound

of stone, 5 ft. base; 4 ft. high, N. of cor.

From this cor. the original sec. cor. bears S. 19°W., 6.25 chs. dist.

Cor. is a volcanic stone, 18x12x10 ins. firmly set and properly mkd.

I deposit this cor. alongside iron post.

INDEPENDENT RESURVEY OF SOUTH BDY. OF T. 28 S., R. 14 W.

Chains

Land, gently rolling valley, with general northwesterly exposure and drainage.

Soil, light colored sandy clay mixed with rock and gravel, with a rocky surface; 3rd rate. Volcanic formation.

Undergrowth, shadscale, sage and black brush, yellowtop, Russian thistle, grass and weeds.

No timber.

Fair winter grazing land.

West, along the S. bdy. sec. 33, T. 28 S., R. 14 W.

Over gently rolling bottom of wide valley; through dense short undergrowth.

2.40 Wash, 30 lks. wide, 5 ft. deep, drains N., 2.00 chs. dist.; thence NE.

13.20 Dim road, bears N. 20°W. and S. 20°E.

30.00 Base of mountainous land, bears S. 20°W. and N. 20°E.,; asc. steep SE. slope.

40.00 On steep SE. slope, 150 ft. above base.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$\frac{1}{4}$ S33
1936

raise a mound

of stone, 5 ft. base, 3 ft. high, N. of cor.

From this cor. the original $\frac{1}{4}$ sec. cor. bears S. 8°W., 7.20 chs. dist.

Cor. is a volcanic stone, 18x12x10 ins., firmly set and properly mkd.

I deposit this cor. alongside iron post.

41.70 Spur, 150 ft. above $\frac{1}{4}$ sec. cor., projects NE., about 20.00 chs. dist. to end; desc. NW. slope.

60.00 Head of draw, 50 ft. below spur, drains NE.; asc. steep E. slope.

70.00 Ridge, 500 ft. above $\frac{1}{4}$ sec. cor., bears N. and S.; desc. steep NW. slope.

80.00 On steep NW. slope, 75 ft. below ridge.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 32 and 33, with brass cap mkd.

T28S R14W
S32 | S33
S5
T29S R14W
1936

W. A. .7 INDEPENDENT RESURVEY OF SOUTH BDY. OF T. 28 S., R. 14 W.

Chains

raise a mound

of stone, 4 ft. base, 3 ft. high, N. of cor.

No trace of the original cor. could be found.

Land, gentle and rolling on east portion of mile, and rough and mountainous on westerly portion, with general north-easterly exposure and drainage.

Soil, shallow, light colored clay, from 1 to 4 ft. deep, lying on volcanic bedrock, mixed with rock and gravel, with a rocky surface; 4th rate. Volcanic formation.

Undergrowth, black and sage brush, shadscale, yellowtop, Russian thistle, grass and weeds.

No timber.

Fair winter grazing land.

West, along the S. bdy. sec. 32, T. 28 S., R. 14 W.

Over rolling mountainous land, through scattering timber and dense short undergrowth; desc. steep NW. slope.

24.00 Draw, 100 ft. below sec. cor., drains N. 10°E; asc. steep rocky NE. slope.

40.00 On steep rocky NE. slope, 580 ft. above draw.

Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground to solid rock, and in a large mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap mkd. $\frac{1}{4}$ S32
1936

from which

A juniper, 10 ins. diam., bears N. 27°E., 582 lks. dist., mkd. $\frac{1}{4}$ S 32 B T.A juniper, 6 ins. diam., bears N. 69°W., 19 lks. dist., mkd. $\frac{1}{4}$ S 32 B T.No trace of the original $\frac{1}{4}$ sec. cor. could be found.48.00 Ridge, 76 ft. above $\frac{1}{4}$ sec. cor., bears NE. and SW.; desc. steep NW. slope.

55.50 Head of draw, 75 ft. below ridge, drains N.; asc. steep NE. slope.

60.70 Spur, 25 ft. above head of draw, projects NW; asc. gradual E. slope.

74.00 Ridge, 50 ft. above spur, bears N. 80°W. and S. 80°E.; desc. gradually along SW. slope.

80.00 On gradual SW. slope, 60 ft. below ridge.

Set an iron post, 3 ft. long, 2 ins. diam., 14 ins. in the ground, to solid rock, and in a mound of stone to top, for cor. of sects. 31 and 32, with brass cap mkd.

INDEPENDENT RESURVEY OF SOUTH BDY. OF T. 28 S., R. 14 W.

Chains

T28S R14W
S31 S32
 S6
 T29S R14W
 1936

from which

A pinon, 14 ins. diam., bears N. 2°E., 357 lks. dist.,
 mkd. T 28 S R 14 W S 32 B T.

A pinon, 10 ins. diam., bears N. 10°30'W., 358 lks. dist.,
 mkd. T 28 S R 14 W S 31 B T.

No trace of the original sec. cor. could be found.

Land, rolling and mountainous, with general northeasterly exposure and drainage.

Soil, shallow light colored clay, from 1 to 2 ft. deep, mixed with rock and gravel, with a rocky surface, lying on volcanic bedrock;; 4th rate. Volcanic formation.

Undergrowth, sage and black brush, shadscale, yellowtop, grass, and weeds.

Timber, juniper and pinon.

Fair winter grazing land.

West, along the S. bdy. sec. 31, T. 28 S., R. 14 W.

Over rolling mountainous land, through scattering timber and dense undergrowth; desc. gradual SW. slope.

33.80 Draw, 410 ft. below sec. cor., drains N.; asc. steep E. slope.

38.70 Spur, 100 ft. above draw, projects NW. about 15.00 chs. dist. to end; desc. gradual NW. slope.

40.00 On gradual NW. slope, 10 ft. below spur.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$\frac{1}{4}$ S 31

1936

from which

A juniper, 8 ins. diam., bears N. 63°15'E., 40 lks. dist., mkd. $\frac{1}{4}$ S 31 B T.

A juniper, 12 ins. diam., bears N. 16°45'W., 14 lks. dist., mkd. $\frac{1}{4}$ S 31 B T.

44.60 Draw, 80 ft. below $\frac{1}{4}$ sec. cor., drains N. 10°W.; asc. gradual NE. slope.

47.00 Spur, 40 ft. above draw, projects N. 10°W.; desc. steep NW. slope.

INDEPENDENT RESURVEY OF SOUTH BDY. OF T. 28 S., R. 14 W.

Chains


- 55.80 Large main draw, 100 ft. below spur, drains N; asc. steep SE. slope.
- 68.00 Ascent becomes gradual, bears N. 10°E. and S. 10°W.
- 78.86 On gradual SE. slope, 100 ft. above draw.

The cor. of Tps. 28 and 29 S., Rs. 14 and 15 W., a volcanic stone 18x16x8 ins., firmly set in the ground mkd. 6 notches on N. and S. edges, witnessed by 3 bearing trees as follows:

- A juniper, 24 ins. diam., bears N. 89°E., 10 lks. dist., mkd. S 31 T. 28 S R 14 W.
- A juniper, 10 ins. diam., bears S. 9°E., 48 lks. dist., mkd. T 28 S.
- A juniper, 6 ins. diam., bears N. 77°W., 10 lks. dist., mkd. S R 15 W.

At the cor. point.

Set an iron post, 3 ft. long, 3 ins. diam., 27 ins. in the ground, with the original cor. monument alongside, for the cor. of Tps. 28 and 29 S., Rs. 14 and 15 W., with brass cap mkd.



I mark each of the original bearing trees B T., and mark a bearing tree in sec. 1, as follows:

- A juniper, 10 ins. diam., bears S. 63°15'W., 43 lks. dist., mkd. T 29 S R 15 W SI B T.

The original bearing trees are too scrubby for other marks.

Land, rolling and mountainous, with general northerly exposure and drainage.

Soil, shallow light colored clay, from 1 to 2 ft. deep, mixed with rock and gravel, lying on volcanic bedrock; 4th rate. Volcanic and sandstone formation,

Undergrowth, sage and black brush, yellowtop, shadscale, Russian thistle, grass and weeds.

Timber, juniper and pinon.

Fair winter grazing land.

INDEPENDENT RESURVEY, PORTION OF SECOND GUIDE MERIDIAN WEST, THROUGH T. 28 S., BET. Rs. 13 and 14 W:

Independent Resurvey, superseding the survey executed by C. L. Ericzon, U. S. Deputy Surveyor, in 1875, and resurveyed by T.C. Bailey, U.S. Deputy Surveyor in 1882.

INDEPENDENT RESURVEY, PORTION OF SECOND GUIDE MERIDIAN WEST, THROUGH T. 28 S., BET. Rs. 13 and 14 W.

acres

Chains

From the SW. cor. T. 28 S., R. 13 W., which is described in the official record of the survey T. 29 S.; R. 13 W., Group 271, Utah.

North, on true line, along the W. bdy. of sec. 31, T. 28 S., R. 13 W.

Over rolling hilly land, through scattering timber and dense short undergrowth; asc. gradual SW. slope.

6.46 The closing cor. of T. 28 S., R. 14 W., heretofore described

14.40 Spur, 10 ft. above closing cor.; projects NW.; leave timber bears E. and W.; desc. gradual NE. slope.

35.40 Wash, 1.50 chs. wide, 5 ft. deep in main draw, 50 ft. below spur, drains NW.; asc. gradual SW. slope.

40.00 On gradual SW. slope.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor. sec. 31, T. 28 S., R. 13 W., with brass cap mkd.

$\frac{1}{4}$ S31

1936

from which

A juniper, 12 ins. diam., bears N. 81°15'E., 62 lks. dist., mkd. $\frac{1}{4}$ S 31 B T.

A juniper, 8 ins. diam., bears S. 54°E., 212 lks. dist., mkd. $\frac{1}{4}$ S 31 B T.

From this cor. the original $\frac{1}{4}$ sec. cor. bears N. 17°W., 120 lks. dist.

Cor. is a volcanic stone; 10x10x10 ins., firmly set and properly mkd.

I deposit this cor. alongside the iron post.

42.50 Low spur, 15 ft. above $\frac{1}{4}$ sec. cor., projects N. 70°W.; desc. gradual NE. slope.

46.46 On gradual NE. slope; northing of 40.00 chs. from the closing cor. of Tps. 28 and 29 S., R. 14 W.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor. sec. 36, T. 28 S., R. 14 W., with brass cap mkd.

$\frac{1}{4}$ S36

1936

raise a mound

of stone, 4 ft. base, 3 ft. high, W. of cor.

64.40 Top of elongated knoll, 50 ft. above spur, bears NE. and SW.

77.90 Shallow draw, 70 ft. below knoll, drains NW.

80.00 On gently rolling land.

INDEPENDENT RESURVEY, PORTION OF SECOND GUIDE MERIDIAN WEST,
THROUGH T. 28 S., BET. Rs. 13 and 14 W.

Chains

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground; for cor. of secs. 30 and 31, T. 28 S., R. 13 W. with brass cap mkd.

| | |
|------|------|
| T28S | T28S |
| R14W | S30 |
| S36 | S31 |
| | R13W |

1936

raise a mound

of stone, 3 ft. base, 2 ft. high, E. of cor.

From this cor. the original sec. cor. bears N. 11°45'W., 88 lks. dist.

Cor. is a quartzite stone, 14x10x8 ins., firmly set and properly mkd.

I. deposit this cor. alongside the iron post.

Land, gently rolling hills, with general northwesterly exposure and drainage.

Soil, light colored sandy clay loam, from 1 to 4 ft. deep, mixed with rock and gravel, with a rocky surface; 3rd rate Volcanic formation.

Undergrowth, sagebrush, shadscale, yellowtop, Russian thistle, grass and weeds.

Fair winter grazing land.

Timber, Juniper

North, along the W. bdy. of sec. 30, T. 28 S., R. 13 W.

Over rolling hilly land, through scattering timber, dense short undergrowth; asc. gradual SW. slope.

3.80 Wash, 40 lks. wide, 4 ft. deep, in the bottom of wide draw, drains W; asc. gradual SE. slope.

6.46 On gradual SE. slope; point which is N. 80.00 chs. dist. from the closing cor. of Tps. 28 and 29 S., R. 14 W.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 25 and 36, T. 28 S., R. 14 W., with brass cap mkd.

| | |
|------|------|
| T28S | |
| S25 | T28S |
| S36 | R13W |
| R14W | S30 |

1936

raise a mound

of stone, 4 ft. base, 3 ft. high, W. of cor.

22.70 Top of knoll, on spur, 85 ft. above wash, projects SW.; desc. gradual N. slope.

32.50 Draw, 60 ft. below knoll, drains NW.

INDEPENDENT RESURVEY, PORTION OF SECOND GUIDE MERIDIAN WEST, THROUGH T. 28 S., BET. RS. 13 and 14 W.

Chains

40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor. sec. 30, T. 28 S., R. 13 W., with brass cap mkd.

$\frac{1}{4}$ S30
1936

raise a mound

of stone, 4 ft. base, 3 ft. high, E. of cor.

From this cor. the original $\frac{1}{4}$ sec. cor. bears N. 45°W., 11 lks. dist.

Cor. is a quartzite stone, 12x10x10 ins. firmly set and properly mkd.

I deposit this cor. alongside the iron post.

46.46 On gradual SE. slope; point which is N. 40.00 chs. dist. from the cor. of secs. 25 and 36, T. 28 S., R. 14 W.

Set an iron post, 3 ft. long, 1 in. diam., 14 ins. in the ground, to solid rock, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor. sec. 25, T. 28 S., R. 14 W., with brass cap mkd.

$\frac{1}{4}$ S25
1936

deposit a

volcanic stone 10x10x3 ins. at base of iron post, mkd. X.

57.40 Spur, 140 ft. above draw, projects NW.; desc. NW. slope.

65.40 Draw, 20 ft. deep, drains N. 80°W.

75.90 Wash, 20 lks. wide, 3 ft. deep, drains W.; enter scattering timber, bears E. and W.

80.00 Wash, 50 lks. wide, 4 ft. deep, drains W.

81.42 The cor. originally for secs. 19, 24, 25 and 30, a volcanic stone 12x8x8 ins., mkd. 2 notches on the N. edge and 4 notches on S. edge; from which

A juniper, 12 ins. diam., bears S. 6°W.; 106 lks. dist., markings not legible.

At the cor. point.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground with the original cor. monument alongside, for cor. of secs. 19 and 30, T. 28 S., R. 13 W., with brass cap mkd.

T28S
T28S | S19
R14W | S30
S25 | R13W

1936

07.00

08.25

INDEPENDENT RESURVEY, PORTION OF SECOND GUIDE MERIDIAN WEST,
THROUGH T. 28 S., BET. RS. 13 and 14 W.

Chains

from which

A juniper, 8 ins. diam., bears S.13°E., 200 lks.
dist., mkd. T 28 S R 13 W S 30 B T.

No bearing tree in sec. 19 available.

Raise a mound of stone, 4 ft. base, 3 ft. high, E. of cor.

Land, rolling and hilly, with general northwesterly exposure and drainage.

Soil, shallow light colored clay from 1 to 4 ft. deep, mixed with rock and gravel; 4th rate. Volcanic formation.

Undergrowth, sagebrush, yellow top, shadscale, Russian thistle, grass and weeds.

Timber, scattered juniper on extreme N. portion of mile

Fair winter grazing land.

INDEPENDENT RESURVEY, PORTION OF SECOND GUIDE MERIDIAN WEST,
THROUGH T. 28 S., BET. RS. 13 and 14 WEST

Reestablishment of the surveys executed by C. L.
Ericson, U. S. Deputy Surveyor, in 1875,
and resurveyed by T. C. Bailey,
U. S. Deputy Surveyor,
in 1902.

RANDOM LINES

From the cor. secs. 19 and 30, T. 28 S., R. 13 W.

North, along the N. bdy. sec. 19, T. 28 S., R. 13 W.

40.26 Fall 12 lks. W. of the $\frac{1}{4}$ sec. cor. secs. 19 and 24, hereinafter described.

The course of this half mile, therefore, is N.0°10'E., and the dist. is 40.26 chs.

From the $\frac{1}{4}$ sec. cor.

North, with continuous measurement.

30.54 Fall 11 lks. W. of the cor. secs. 13, 18, 19 and 24, hereinafter described.

The course of this half mile therefore is N.0°09'E., and the distance is 40.28 chs.

From the cor. secs. 13, 18, 19 and 24.

North, bet. secs. 13 and 18.

40.26 Fall 13 lks. W. of the $\frac{1}{4}$ sec. cor. secs. 13 and 18, hereinafter described.

The course of this half mile therefore is N.0°11'E., and the dist. is 40.26 chs.

DEPENDENT RESURVEY, PORTION OF SECOND GUIDE MERIDIAN WEST,
 THROUGH T.28 S.; BET. RS. 13 and 14 W.

| Chains | |
|--------|---|
| | From the $\frac{1}{4}$ sec. cor. North, with continuous measurement. |
| 80.57 | Fall 15 lks. W. of the cor. secs. 7, 12, 13 and 18, hereinafter described. The course of this half mile therefore is N.0°13'E., and the distance is 40.31 chs. |
| | From the cor. secs. 7, 12, 13 and 18. North, bet. secs. 7 and 12. |
| 40.16 | Fall 6 lks. W. of the $\frac{1}{4}$ sec. cor. secs. 7 and 12, hereinafter described. The course of this half mile, therefore, is N.0°5'E. and the dist. is 40.16 chs. |
| | From the $\frac{1}{4}$ sec. cor. North, with continuous measurement. |
| 80.34 | Fall 8 lks. W. of the cor. secs. 1, 6, 7 and 12, hereinafter described. The course of this half mile therefore is N.0°07'E., and the dist. is 40.18 chs. |
| | From the cor. secs. 1, 6, 7 and 12. North, bet. secs. 1 and 6. |
| 40.18 | Fall 11 lks. W. of the $\frac{1}{4}$ sec. cor. secs. 1 and 6, hereinafter described. The course of this half mile therefore is N.0°09'E., and the dist. is 40.18 chs. |
| | From the $\frac{1}{4}$ sec. cor. North, with continuous measurement. |
| 80.26 | Falls 6 lks. W. of the cor. of Tps. 27 & 28 S., Rs. 13 and 14 W., hereinafter described. The course of this half mile therefore is N.0°05'E., and the distance is 40.00 chs. |

TRUE LINES

| | |
|------|---|
| | From the cor. secs. 19 and 30, T. 28 S., R.13 W. N.0°10'E., on true line along the W. bdy. sec. 19, T.28 S., R.13 W. |
| | Over rolling bench land of Wah Wah Valley, through dense short undergrowth. |
| 5.04 | Northing of 80.00 chs. from cor. of secs. 25 and 36, T.28 S., R. 14 W. |

DEPENDENT RESURVEY, PORTION OF SECOND GUIDE MERIDIAN WEST,
THROUGH T. 28 S., BET. RS. 13 and 14 W.

Chains

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. secs. 24 and 25, T. 28 S., R. 14 W., with brass cap mkd.

| | |
|------|------|
| T28S | |
| S24 | T28S |
| S25 | R13W |
| R14W | S19 |

1936

raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

9.30 Draw, 15 ft. deep, drains NW.

20.00 Draw, 10 ft. deep, drains NW.

40.26 The $\frac{1}{4}$ sec. cor. originally for secs. 19 and 24, a volcanic stone 14x12x10 ins., mkd. $\frac{1}{4}$ on W. face. Cor. has no accessories.

At the cor. point.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with the original cor. monument deposited alongside, for $\frac{1}{4}$ sec. cor. sec. 19, T. 28 S., R. 13 W., with brass cap mkd.

$\frac{1}{4}$ S19

1936

raise a mound of stone, 4 ft. base, 3 ft. high, E. of cor.

Thence

N. $0^{\circ}09'E.$, with continuous measurement.

45.04 Point which is a morthing of 40.00 chs. from the cor. secs. 24 and 25, T. 28 S., R. 14 W.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor. sec. 24, T. 28 S., R. 14 W., with brass cap mkd.

$\frac{1}{4}$ S24

1936

raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

50.80 Old road, bears NE. and SW.

72.50 Wash, 80 lks. wide, 6 ft. deep, drains NW.

80.54 The cor. originally for secs. 13, 18, 19 and 24, a volcanic stone 18x12x12 ins., mkd. 3 notches on the S. and N. edges.

Cor. has no accessories.

At the cor. point.

DEPENDENT RESURVEY, PORTION OF SECOND GUIDE MERIDIAN WEST,
THROUGH T. 28 S., BET. RS. 13 and 14 W.

Chains

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, with original cor. monument deposited alongside, for cor. secs. 18 and 19, T. 28 S., R. 13 W., with brass cap mkd.

| | |
|------|------|
| T28S | T28S |
| R14W | S18 |
| S24 | S19 |
| | R13W |

1936

raise a mound of stone, 4 ft. base, 3 ft. high, E. of cor.

Land, level bottom of Wah Wah Valley, with general north-westerly exposure and drainage.

Soil, light colored sandy clay loam, from 2 to 4 ft. deep, mixed with rock and gravel; 4th rate.

Undergrowth, sagebrush, shadscale, yellowtop, Russian thistle, grass and weeds.

No timber.

Fair winter grazing land.

N. 0°11'E., along the W. bdy. sec. 18, T. 28 S., R. 13 W.

Over level bottom of Wah Wah Valley, through dense short undergrowth.

.30 Wash, 10 lks. wide, 2 ft. deep, drains N. 80°W.

4.50 Point which is a northing of 80.00 chs. from the cor. secs. 24 and 25, T. 28 S., R. 14 W.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. secs. 13 and 24, T. 28 S., R. 14 W., with brass cap mkd.

| | |
|------|------|
| T28S | T28S |
| S13 | R13W |
| S24 | S18 |
| R14W | |

1936

raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

14.20 Wash; 10 lks. wide, 2 ft. deep, drains W.

26.50 Road, bears SW. and NE.

40.26 The 1/4 sec. cor. originally for secs. 13 and 18, a volcanic stone, 12x10x8 ins., mkd. 1/4 on W. face, Cor. has no accessories.

At the cor. point.

INDEPENDENT RESURVEY, PORTION OF SECOND GUIDE MERIDIAN WEST,
THROUGH T. 28 S., BET. RS. 13 and 14 W.

Chains

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with the original cor. monument deposited alongside, for $\frac{1}{4}$ sec. cor. sec. 18, T. 28 S., R. 13 W., with brass cap mkd.

$\frac{1}{4}$ S18

1936

raise a mound

of stone, 4 ft. base, 3 ft. high, E. of cor.

Thence

N. 0°13'E., with continuous measurement.

44.10 Enter flood plain, drains NW.

44.50 Point which is northing of 40.00 chs. from the cor. secs. 13 and 24, T. 28 S., R. 14 W.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor. sec. 13, T. 28 S., R. 14 W., with brass cap mkd.

S13

1936

raise a mound

of stone, 3 ft. base, 2 ft. high, W. of cor.

60.60 Leave flood plain, drains NW.

80.57 The cor. originally for secs. 7, 12, 13 and 18, a volcanic stone, 10x10x8 ins., mkd. 4 notches on the S. edge and 2 notches on the N. edge. Cor. has no accessories.

At the cor. point.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, with the original cor. monument deposited alongside, for cor. of secs. 7 and 18, T. 28 S., R. 13 W., with brass cap mkd.

T28 S
R14 W
S13

| |
|-------|
| T28 S |
| S7 |
| S18 |
| R13 W |

1936

raise a mound

of stone, 4 ft. base, 3 ft. high, E. of cor.

Land, level bottom of Wah Wah Valley, with general norther-westerly exposure and drainage.

Soil, light colored sandy clay loam, from 2 to 4 ft. deep, mixed with rock and gravel; 3rd rate.

Undergrowth, sagebrush, yellowtop, shadscale, Russian thistle, grass and weeds.

No timber.

DEPENDENT RESURVEY, PORTION OF SECOND QUAD MERIDIAN WEST, THROUGH T. 28 S., BEF. RS. 13 and 14 W.

Chains

arlanG

Fair winter grazing land.

N. 0°05'E., along the W. bdy. of sec. 7, T. 28 S., R. 13 W. Over level bottom of Wah Wah Valley, through dense short undergrowth.

3.93 Point which is a northing of 80.00 chs. from the cor. secs. 13 and 24, T. 28 S., R. 14 W.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. secs. 12 and 13, T. 28 S., R. 14 W., with brass cap mkd.

| | |
|------|------|
| T28S | T28S |
| S12 | R13W |
| S13 | S7 |
| R14W | |

1936

raise a mound

of stone, 4 ft. base, 3 ft. high, W. of cor.

15.00 Wash, 100 lks. wide, 4 ft. deep, drains N. 70°W.

26.20 Wash, 20 lks. wide, 3 ft. deep, drains N. 60°W.

28.00 Dim road, bears S. 60°E. and N. 60°W.

40.16 The 1/4 sec. cor. originally for secs. 7 and 12, a volcanic stone, 10x10x10 ins. mkd. 1/4 on W. face. Cor. witnessed by a small mound of stone to the E.

At the cor. point.

Set an iron post, 3 ft. long; 1 in. diam., 27 ins. in the ground, with the original cor. monument deposited alongside; for the 1/4 sec. cor. sec. 7, T. 28 S., R. 13 W., with brass cap mkd.

1/4 S7

1936

raise a mound

of stone, 4 ft. base, 3 ft. high, E. of cor.

Thence

N. 0°07'E., with continuous measurement.

43.93 Point which is a northing of 40.00 chs. from the cor. secs. 12 and 13, T. 28 S., R. 14 W.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/4 sec. cor. sec. 12, T. 28 S., R. 14 W., with brass cap mkd.

1/4 S12

1936

INDEPENDENT RESURVEY, PORTION OF SECOND GUIDE MERIDIAN WEST.
THROUGH T. 28 S., BET. RS. 13 and 14 W.

Chains

raise a mound

of stone, 4 ft. base, 3 ft. high, W. of cor.

51.10 Wash, 20 lks. wide, 3 ft. deep, drains NW.

54.60 Wash, 50 lks. wide, 4 ft. deep, drains NW.

64.30 Wash, 80 lks. wide, 3 ft. deep, drains N. 60°W.

66.80 Wash, 50 lks. wide, 3 ft. deep, drains N. 60°W.

80.34 Cor. originally for secs. 1, 6, 7, and 12, a volcanic stone, 12x10x6 ins., mkd. 5 notches on S. edge and 1 notch on N. edge. Cor. has no accessories.

At the cor. point.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. secs. 6 and 7, T. 28 S., R. 13 W., with brass cap mkd.

| | |
|------|------|
| T28S | T28S |
| R14W | S6 |
| S12 | S7 |
| | R13W |

1936

raise a mound

of stone, 4 ft. base, 3 ft. high, E. of cor.

Land, level bottom of Wah Wah Valley, with general north-westerly exposure and drainage.

Soil, light colored clay, from 2 to 4 ft. deep, mixed with rock and gravel; 3rd rate.

Undergrowth, sagebrush, shadscale, yellowtop, Russian thistle, grass and weeds.

No timber.

Fair winter grazing land.

N. 0°09'E., along the W. bdy. sec. 6, T. 28 S., R. 13 W.

Over level bottom of Wah Wah Valley, through dense short undergrowth.

3.59 Point which is a northing of 80.00 chs. from the cor. secs. 12 and 13, T. 28 S., R. 14 W.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground for cor. secs. 1 and 12, T. 28 S., R. 14 W., with brass cap mkd.

| | |
|------|------|
| T28S | |
| S1 | T28S |
| S12 | R13W |
| | S6 |
| R14W | |

1936

DEPENDENT RESURVEY, PORTION OF SECOND GUIDE MERIDIAN WEST,
THROUGH T. 28 S., BET. RS. 13 and 14 W.

Chains

raise a mound

of stone, 4 ft. base, 3 ft. high, W. of cor.

10.90 Wash, 5 lks. wide, 2 ft. deep, drains NW.

37.80 Dim road, bears NW. and SE.

40.18 The 1/4 sec. cor. originally for secs. 1 and 6, a volcanic stone 10x8x6 ins., mkd. 1/4 on the W. face. Cor. has no accessories.

At the cor. point.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with the original cor. monument deposited alongside, for 1/4 sec. cor. sec. 6, T. 28 S., R. 13 W., with brass cap mkd.

1/4 S 6

1936.

raise a mound

of stone, 3 ft. base, 2 ft. high, E. of cor.

Thence

N. 0°05'E., with continuous measurement.

42.50 Wash, 10 lks. wide, 2 1/2 ft. deep, drains NW.

43.59 Point which is a northing of 40.00 chs. from the cor. secs. 1 and 12, T. 28 S., R. 14 W.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/4 sec. cor. sec. 1, T. 28 S., R. 14 W., with brass cap mkd.

1/4 S 1

1936

raise a mound

of stone, 4 ft. base, 3 ft. high, W. of cor.

69.80 Old Salt Lake City to Pioche, Nevada, wagon road, bears NE. and SW.

80.26 The cor. Tps. 27 and 28 S., Rs. 13 and 14 W, a volcanic stone, 16x10x8 ins., mkd. 6 notches on all edges. Cor. has no accessories.

At the cor. point.

Set an iron post, 3 ft. long 3 ins. diam., 27 ins. in the ground, with the original cor. monument deposited alongside, for cor. Tps. 27 and 28 S., Rs. 13 and 14 W., with brass cap mkd.

T27S

R14W R13W

S36 S31

S1 S6

T28S

1936

DEPENDENT RESURVEY, PORTION OF SECOND GUIDE MERIDIAN WEST,
THROUGH T. 28 S., BET. RS. 13 and 14 W.

Chains

raise a mound.

of stone, 4 ft. base, 3 ft. high, S. of cor.

Land, level bottom of Wah Wah Valley, with general north-westerly exposure and drainage.

Soil, light colored sandy clay loam, from 2 to 4 ft. deep, mixed with rock and gravel; 3rd rate. Volcanic formation.

Undergrowth, sagebrush, shadscale, yellowtop, Russian thistle, grass and weeds.

No timber.

Fair winter grazing land.

DEPENDENT RESURVEY OF THE NORTH BOUNDARY, T. 28 S., R. 14W.

Reestablishment of the survey executed by
Henry Fitzhugh, U.S. Deputy Surveyor,
in 1882.

RANDOM LINES

From the cor. of Tps. 27 and 28 S., Rs. 13 and 14 W., heretofore described.

West, bet. secs. 1 and 36.

40.14 Fall, 2 lks. N. of the $\frac{1}{4}$ sec. cor. of secs. 1 and 36, hereinafter described.

The course of this half mile therefore is S.89°58'W., and the dist. is 40.14 chs.

From the $\frac{1}{4}$ sec. cor.

West, with continuous measurement.

80.32 Fall, 9 lks. S. of the cor. secs. 1, 2, 35 and 36, hereinafter described.

The course of this half mile, therefore, is N.89°52'W., and the dist. is 40.18 chs.

From the cor. secs. 1, 2, 35 and 36.

West, bet. secs. 2 and 35.

40.26 Intersect the $\frac{1}{4}$ sec. cor. of secs. 2 and 35, hereinafter described.

The course of this half mile therefore is West, and the distance 40.26 chs.

From the $\frac{1}{4}$ sec. cor.

West, with continuous measurement.

DEPENDENT RESURVEY OF THE NORTH BOUNDARY, T₁ 89 S. R. 14 W.

| Chains | | and 10 |
|--------|--|-----------|
| 80.26 | Find no trace of the cor. secs. 2, 3, 34 and 35. cor. | Set temp. |
| | <p>From the temp. cor. secs. 2, 3, 34 and 35. West, bet. secs. 3 and 34.</p> | |
| 40.40 | Fall 19 lks. S. of the $\frac{1}{4}$ sec. cor. secs. 3 and 34, hereinafter described. | |
| | <p>The course of the line from the $\frac{1}{4}$ sec. cor. secs. 2 and 35 and the $\frac{1}{4}$ sec. cor. secs. 3 and 34, therefore, is N.89° 52'W., and the proportionate distance for each half mile is 40.20 chs.</p> | |
| | <p>From the $\frac{1}{4}$ sec. cor. West, with continuous measurement.</p> | |
| 80.55 | Fall 11 lks. S. of the cor. of secs. 3, 4, 33, and 34, hereinafter described. | |
| | <p>The course of this half mile therefore is N.89°51'W., and the dist. is 40.15 chs.</p> | |
| | <p>From the cor. secs. 3, 4, 33 and 34. West, bet. secs. 4 and 33.</p> | |
| 40.08 | Fall 6 lks. S. of the $\frac{1}{4}$ sec. cor. of secs. 4, and 33, hereinafter described. | |
| | <p>The course of this half mile therefore is N.89°55'W., and the dist. is 40.08 chs.</p> | |
| | <p>From the $\frac{1}{4}$ sec. cor. West, with continuous measurement.</p> | |
| 80.18 | Fall 15 lks. S. of the cor. of secs. 4, 5, 32 and 33, hereinafter described. | |
| | <p>The course of this half mile therefore is N.89°47'W., and the dist. is 40.10 chs.</p> | |
| | <p>From the cor. secs. 4, 5, 32 and 33. West, bet. secs. 5 and 32.</p> | |
| 40.05 | Fall 6 lks. S. of the $\frac{1}{4}$ sec. cor. of secs. 5 and 32; hereinafter described. | |
| | <p>The course of this half mile therefore is N.89°55'W., and the dist. is 40.05 chs.</p> | |
| | <p>From the $\frac{1}{4}$ sec. cor. West, with continuous measurement.</p> | |

DEPENDENT RESURVEY OF THE NORTH BOUNDARY, T. 28 S., R. 14 W.

Chains

80.11 Fall 9 lks. S. of the cor. of secs. 5, 6, 31 and 32, hereinafter described.

The course of this half mile therefore is N.89°52'W., and the dist. is 40.06 chs.

From the cor. secs. 5, 6, 31, and 32.

West, bet. secs. 6 and 31.

40.14 Fall 12 lks. N. of the $\frac{1}{4}$ sec. cor. secs. 6 and 31, hereinafter described.

The course of this half mile therefore is S.89°50'W., and the dist. is 40.14 chs.

From the $\frac{1}{4}$ sec. cor.

West, with continuous measurement.

78.50 Fall 23 lks. N. of the cor. of Tps. 27 and 28 S., Rs. 14 and 15 W., hereinafter described.

The course of this half mile therefore is S.89°40'W., and the dist. is 38.36 chs.

At a point 23 lks. N. of the tp. cor. I deflect an angle of 90° to the east of the true meridian established at this cor. on December 10, 1936, as heretofore described, and find that my line bet. secs. 6 and 31 bears East.

 TRUE LINES

From the cor. of tps. 27 and 28 S., Rs. 13 and 14 W., heretofore described.

S.89°58'W., on true line bet. secs. 1 and 36.

Over gently rolling land of Wah Wah Valley, through dense short undergrowth.

15.62 Wash, 20 lks. wide, 3 ft. deep, drains NW.

40.14 The $\frac{1}{4}$ sec. cor. of secs. 1 and 36, a volcanic stone 10x8x6 ins. mkd. $\frac{1}{4}$ on N. face. Cor. has no accessories.

At the cor. point.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with the cor. monument deposited alongside, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

S 36

$\frac{1}{4}$

S 1

1936

raise a mound

of stone, 4 ft. base, 3 ft. high, N. of cor.

Thence

N.89°52'W., with continuous measurement.

DEPENDENT RESURVEY OF THE NORTH BOUNDARY, T. 28 S., R. 14 W.

Chains

11.03

69.32


Shallow wash, 100 lks. wide, drains N.30°E.

80.32

The cor. of secs. 1, 2, 35 and 36, a volcanic stone, 10x8x5 ins., mkd. 5 notches on W. edge and 1 notch on E. edge. Cor. has no accessories.

At the cor. point.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, with the cor. monument alongside, for cor. secs. 1, 2, 35, and 36, with brass cap mkd.



1936

raise a mound

of stone, 4 ft. base, 3 ft. high, W. of cor.

Land, gently rolling, with general northerly exposure and drainage.

Soil, light colored sand and clay, from 1 to 4 ft. deep, mixed with rock and gravel; 3rd rate.

Undergrowth, sagebrush, yellowtop, Russian thistle, grass and weeds.

No timber.

Fair winter grazing land.

West, along the S. bdy. sec. 35, T. 27 S., R. 14 W.

Over level land of Wah Wah Valley, through dense short undergrowth.

12.00

Dim road, bears N.10°W. and S.10°E.

30.60

The E. bank of wash, bears N.10°W., and S. 10°E.

31.80

Bottom of main wash, 20 ft. deep, drains N.10°W.

32.90

The W. bank of wash, bears N.10°W. and S.10°E.

35.60

Wash, 40 lks. wide, 10 ft. deep, drains N. about 7.00 chs. dist. to junction with main wash.

40.00

Point midway bet. cor. secs. 1, 2, 35 and 36, and closing cor. of secs. 2 and 3.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground for $\frac{1}{4}$ sec. cor. sec. 2, with brass cap mkd.

$\frac{1}{4}$

S 2

1936

DEPENDENT RESURVEY OF THE NORTH BOUNDARY, T. 28 S., R. 14 W.

Chains

raise a mound
of stone, 4 ft. base, 3 ft. high, S. of cor.

40.26 The $\frac{1}{4}$ sec. cor. originally for secs. 2 and 35, a volcanic stone 10x10x8 ins., mkd. $\frac{1}{4}$ on N. face. Cor. has no access-
ories.

At the cor. point.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with the original cor. monument deposited along-
side, for $\frac{1}{4}$ sec. cor. sec. 35, with brass cap mkd.

$\frac{1}{4}$ S35

1936

raise a mound
of stone, 4 ft. base, 3 ft. high, N. of cor.

Thence
N.89°52'W., with continuous measurement.

46.20 Swale, 10 ft. deep, drains N.

80.00 The closing cor. secs. 2 and 3, T. 28 S., R. 14 W.
subsequently set at this point.

80.46 Proportionate point:

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for the restored cor. secs. 34 and 35, T. 27 S.,
R. 14 W., with brass cap mkd.

| | |
|------|------|
| T29S | R14W |
| S34 | S35 |

S3
T28S R14W

1936

raise a mound
of stone, 4 ft. base, 3 ft. high, N. of cor.

Land, level bottom of Wah Wah Valley, with general north-
erly exposure and drainage.

Soil, light colored clay, from 2 to 4 ft. deep, mixed
with rock and gravel; 4th rate.

Undergrowth, sagebrush, yellowtop, Russian thistle, grass
and weeds.

No timber.

Fair winter grazing land.

N.89°52'W., along the S. bdy. sec. 34, T. 27 S., R. 14 W.

DEPENDENT RESURVEY OF THE NORTH BOUNDARY, T. 28 S., R. 14 W.

| | | | | | |
|--------|---|------|------|-----|-----|
| Chains | Over level land of Wah Wah Valley, through dense short undergrowth. | | | | |
| .20 | Enter flood plain, drains N.20°E. | | | | |
| 8.30 | Leave flood plain, drains N.20°E. | | | | |
| 19.70 | Old road, bears NE. and SW. | | | | |
| 39.54 | Point midway bet. closing cor. of secs. 2 and 3, and secs. 3 and 4. | | | | |
| | Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor. of sec. 3, with brass cap mkd. | | | | |
| | $\frac{1}{4}$ ————— S 3 | | | | |
| | 1936 | | | | |
| | raise a mound | | | | |
| | of stone, 4 ft. base, 3 ft. high, S. of cor. | | | | |
| 40.20 | The $\frac{1}{4}$ sec. cor. originally of secs. 3 and 34, a quartzite stone, 10x10x10 ins., mkd. $\frac{1}{4}$ on N. face. Cor. has no accessories. | | | | |
| | At the cor. point. | | | | |
| | Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with the original cor. monument deposited alongside, for $\frac{1}{4}$ sec. cor. sec. 34, with brass cap mkd. | | | | |
| | $\frac{1}{4}$ S 34 ————— | | | | |
| | 1936 | | | | |
| | raise a mound | | | | |
| | of stone, 4 ft. base, 3 ft. high, N. of cor. | | | | |
| | Thence | | | | |
| | N.89°51'W., with continuous measurement. | | | | |
| 70.75 | Wash, 5 lks. wide, 2 ft. deep, drains N. | | | | |
| 79.54 | The closing cor. secs. 3, and 4, T. 28 S., R. 14 W., subsequently set at this point. | | | | |
| 80.35 | The cor., originally for secs. 3, 4, 33 and 34, a volcanic stone, 12x12x10 ins., mkd. 3 notches on W. edge, and 3 notches on E. edge. Cor. has no accessories. | | | | |
| | At the cor. point. | | | | |
| | Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, with the original cor. monument alongside, for cor. secs. 33 and 34, T. 27 S., R. 14 W., with brass cap mkd. | | | | |
| | <table border="1"> <tr> <td>T27S</td> <td>R14W</td> </tr> <tr> <td>S33</td> <td>S34</td> </tr> </table> | T27S | R14W | S33 | S34 |
| T27S | R14W | | | | |
| S33 | S34 | | | | |
| | S4 | | | | |
| | T28S R14W | | | | |
| | 1936 | | | | |

DEPENDENT RESURVEY OF THE NORTH BOUNDARY, T. 28 S., R. 14 W.

39.08

raise a mound of stone, 2 1/2 ft. base, 3 ft. high, N. of cor.

40.00

Land, level bottom of Wah Wah Valley, with general northerly exposure and drainage.

40.05

Soil, sandy light colored clay, from 2 to 4 ft. deep, mixed with rock and gravel; 3rd rate.

Undergrowth, sagebrush, yellowtop, shadscale, grass and weeds.

No timber.

Pair winter grazing land.

N. 89° 55' W., along the S. bdy. of sec. 33, T. 27 S., R. 14 W.

Over level land of Wah Wah Valley, through dense short undergrowth.

1.70

Old road, bears NW. and SE.

7.70

Enter flood plain, drains north.

20.20

Leave flood plain, drains N.

39.21 1/2

Point midway bet. closing cor. of secs. 3 and 4, and secs. 4 and 5.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/2 sec. cor. of sec. 4, with brass cap mkd.

1/2 S 4

1936

raise a mound

of stone, 4 ft. base, 3 ft. high, S. of cor.

40.08

The 1/2 sec. cor. originally for secs. 4 and 33. A volcanic stone, 12x10x10 ins., mkd. 1/2 on N. face. Cor. has no accessories.

At the cor. point.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with the original cor. monument deposited alongside, for 1/2 sec. cor. sec. 33, with brass cap mkd.

1/2 333

1936

raise a mound

of stone, 4 ft. base, 3 ft. high, N. of cor.

Thence

N. 89° 47' W., with continuous measurement.

DEPENDENT RESURVEY OF THE NORTH BOUNDARY OF T. 28 S., R. 14 W.

| Chains | | | | | | | | | |
|------------------|---|------------------|------|-----|-----|----|--|-----------|--|
| 63.20 | Old road, bears NE. and SW. | | | | | | | | |
| 68.70 | Wash, 30 lks. wide, 4 ft. deep, drains N. | | | | | | | | |
| 79.24 | The closing cor. secs. 4 and 5, T. 28 S., R. 14 W., subsequently set at this point. | | | | | | | | |
| 80.18 | <p>The cor. originally for secs. 4, 5, 32 and 33, a volcanic stone 12x10x10 ins., mkd. 4 notches on E. edge and 2 notches on W. edge. Cor. has no accessories.</p> <p>At the cor. point.</p> <p>Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, with the original cor. monument deposited alongside, for cor. of secs. 32 and 33, T. 27 S., R. 14 W., with brass cap mkd.</p> <table border="1" data-bbox="541 742 746 906" style="margin-left: auto; margin-right: auto;"> <tr> <td>T27S</td> <td>R14W</td> </tr> <tr> <td>S32</td> <td>S33</td> </tr> <tr> <td colspan="2" style="text-align: center;">S5</td> </tr> <tr> <td colspan="2" style="text-align: center;">T28S R14W</td> </tr> </table> <p style="text-align: center;">1936</p> <p style="text-align: right;">raise a mound</p> <p>of stone, 4 ft. base, 3 ft. high, N. of cor.</p> <p>Land, level bottom of Wah Wah Valley, with general northerly exposure and drainage.</p> <p>Soil, light colored sandy clay loam; from 2 to 4 ft. deep, mixed with rock and gravel; 3rd rate.</p> <p>Undergrowth, sagebrush, yellowtop, shadscale, Russian thistle, grass and weeds.</p> <p>No timber.</p> <p>Fair winter grazing land.</p> <hr style="width: 20%; margin: 20px auto;"/> <p>N. 89°55' W., along the S. bdy. of sec. 32, T. 27 S., R. 14 W.</p> <p>Over level land of Wah Wah Valley, through dense short undergrowth.</p> | T27S | R14W | S32 | S33 | S5 | | T28S R14W | |
| T27S | R14W | | | | | | | | |
| S32 | S33 | | | | | | | | |
| S5 | | | | | | | | | |
| T28S R14W | | | | | | | | | |
| 9.10 | Old road, bears N. and S. | | | | | | | | |
| 39.05 | <p>Point midway bet. the closing cor. of secs. 4 and 5, and secs. 5 and 6.</p> <p>Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ sec. cor. of sec. 5, with brass cap mkd.</p> <table border="1" data-bbox="517 1921 674 1976" style="margin-left: auto; margin-right: auto;"> <tr> <td>$\frac{1}{4}$ S5</td> </tr> </table> <p style="text-align: center;">1936</p> <p style="text-align: right;">raise a mound</p> <p>of stone, 4 ft. base, 3 ft. high, S. of cor.</p> | $\frac{1}{4}$ S5 | | | | | | | |
| $\frac{1}{4}$ S5 | | | | | | | | | |

DEPENDENT RESURVEY OF THE NORTH BOUNDARY OF T. 28 S., R. 14 W.

Chains

40.05 The 1/4 sec. cor., originally for secs, 5 and 32, a volcanic stone, 12x10x8 ins., mkd. 1/4 on N. face. Cor. has no accessories,

At the cor. point.

Set an iron post, 3 ft. long, 1 in. diam., .27 ins. in the ground, with the original cor. monument deposited alongside, for 1/4 sec. cor. of sec. 32, with brass cap mkd.

1/4 S 32

1936

raise a mound

of stone, 4 ft. base, 3 ft. high, N. of cor.

Thence

N.89°52'W., with continuous measurement.

44.90 Draw, 10 ft. deep, drains N.10°E.

60.40 Wash, 60 lks. wide, 5 ft. deep, drains N.20°E.

62.60 Wash, 30 lks. wide, 5 ft. deep, drains N.20°E.

68.70 Small draw, 10 ft. deep, drains N.

79.04 The closing cor. secs. 5 and 6, T. 28 S., R. 14 W., subsequently set at this point.

80.11 The cor. originally for secs. 5, 6, 31 and 32, a volcanic stone, 12x12x12 ins., mkd. 5 notches on E. edge and 1 notch on the W. edge. Cor. has no accessories.

At the cor. point.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, with the original cor. monument deposited alongside, for cor. secs. 31 and 32, T. 27 S., R. 14 W., with brass cap mkd.

T27S | R14W
S31 | S32

S6
T28S R14W

1936

raise a mound

of stone, 4 ft. base, 3 ft. high, N. of cor.

Land, level bottom of Wah Wah Valley, with a general northerly exposure and drainage.

Soil, light colored sandy clay loam, from 2 to 4 ft. deep, mixed with rock and gravel; 3rd rate.

Undergrowth, sagebrush, yellowtop, shadscale, Russian thistle, grass and weeds,

No timber.

Fair winter grazing land.

DEPENDENT RESURVEY OF THE NORTH BOUNDARY OF T. 28 S., R. 14 W.

enladO

Chains

S.89°50'W.; along the S. bdy. sec. 31, T. 27 S., R. 14 W.
Over level land, of Wah Wah Valley; through dense short undergrowth.

38.93

Point which is a westing of 40.00 chs. from the closing cor. secs. 5 and 6, T. 28 S., R. 14 W.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor. sec. 6, with brass cap mkd.

$\frac{1}{4}$ ——— S 6

1936

raise a mound

of stone, 4 ft. base, 3 ft. high, S. of cor.

40.14

The $\frac{1}{4}$ sec. cor., originally for secs. 6 and 31, a volcanic stone, 12x12x12 ins., mkd. $\frac{1}{4}$ on N. face. Cor. has no accessories.

At the cor. point.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with the original cor. monument deposited alongside, for $\frac{1}{4}$ sec. cor., sec. 31, with brass cap mkd.

$\frac{1}{4}$ S31

1936

raise a mound

of stone, 4 $\frac{1}{2}$ ft. base, 3 ft. high, N. of cor.

Thence

S.89°40'W.; with continuous measurement.

47.00

Wash, 40 lks. wide, 5 ft. deep, drains N.20°E.

63.00

Dim road, bears N.80°E. and S.80°W.

78.50

The cor. of Tps. 27 and 28 S., Rs. 14 and 15 W., a volcanic stone 18x12x12 ins., mkd. 6 notches on all edges. Cor. has no accessories.

At the cor. point.

Set an iron post, 3 ft. long, 3 ins. diam., 27 ins. in the ground, with the original cor. monument deposited alongside, for cor. of Tps. 27 and 28, Rs. 14 and 15 W., with brass cap mkd.

| | |
|------|------|
| T27S | |
| R15W | R14W |
| S36 | S31 |
| — | |
| S1 | S6 |
| T28S | |

1936

raise a mound

DEPENDENT RESURVEY OF THE WEST BOUNDARY, T. 28 S., R. 14 W.

Chains

of stone, $4\frac{1}{2}$ ft. base, 3 ft. high, S. of cor.

Land, level bottom of Wah Wah Valley, with general northerly exposure and drainage.

Soil, light colored sand and clay, from 2 to 4 ft. deep, mixed with rock and gravel, lying on a heavy clay subsoil; 3rd rate.

Undergrowth, sagebrush, yellowtop, shadscale, Russian thistle, grass and weeds.

No timber.

Fair winter grazing land.

DEPENDENT RESURVEY OF THE W. BDY., T. 28 S., R. 14 W.

Reestablishment of the survey executed by
Henry Fitzhugh, U.S. Deputy Surveyor
in 1882.

RANDOM LINES

From the cor. tps. 28 and 29 S., Rs. 14 and 15 W., heretofore described.

North, bet. secs. 31 and 36.

40.00 Fall 96 lks. W. of the $\frac{1}{4}$ sec. cor. secs. 31 and 36, hereinafter described.

The course of this half mile, therefore, is N. $1^{\circ}22'E.$, and the dist. is 40.01 chs.

From the $\frac{1}{4}$ sec. cor.

North, with continuous measurement.

79.77 Fall 7 lks. E. of the cor. secs. 25, 30, 31 and 36, hereinafter described.

The course of this half mile, therefore, is N. $0^{\circ}06'W.$ and the dist. is 39.77 chs.

North, bet. secs. 25 and 30.

40.20 Fall, 5 lks. W. of the $\frac{1}{4}$ sec. cor. secs. 25 and 30, hereinafter described.

The course of this half mile, therefore, is N. $0^{\circ}04'E.$, and the dist. is 40.20 chs.

From the $\frac{1}{4}$ sec. cor.

North, with continuous measurement.

80.25 Fall 11 lks. W. of the cor. secs. 19, 24, 25, and 30, hereinafter described.

The course of this half mile, therefore, is N. $0^{\circ}09'E.$, and the dist. is 40.05 chs.

DEPENDENT RESURVEY OF THE WEST BOUNDARY, T. 28 S. R. 14 W.

| Chains | Miles |
|--------|--|
| 40.04 | <p>North, bet. secs. 19 and 24.</p> <p>Fall 8 lks. W. of the $\frac{1}{4}$ sec. cor. secs. 19 and 24, hereinafter described.</p> <p>The course of this half mile, therefore, is N.0°07'E. and the dist. is 40.04 chs.</p> <p>From the $\frac{1}{4}$ sec. cor.</p> <p>North, with continuous measurement.</p> |
| 80.00 | <p>Fall 8 lks. W. of the cor. secs. 13, 18, 19 and 24, hereinafter described.</p> <p>The course of this half mile, therefore, is N.0°07'E., and the distance is 80.00 chs.</p> |
| 40.00 | <p>North, bet. secs. 13 and 18.</p> <p>Intersect the $\frac{1}{4}$ sec. cor. secs. 13 and 18, hereinafter described.</p> <p>The course of this half mile, therefore, is North, and the dist. is 40.00 chs.</p> <p>From the $\frac{1}{4}$ sec. cor.</p> <p>North, with continuous measurement.</p> |
| 78.35 | <p>Fall 169 lks. E. of the cor. secs. 7, 12, 13, and 18, hereinafter described.</p> <p>The course of this half mile, therefore, is N.2°31'W., and the dist. is 78.35 chs.</p> |
| 39.55 | <p>North, bet. secs. 7 and 12.</p> <p>Fall 22 lks. E. of the $\frac{1}{4}$ sec. cor. secs. 7 and 12, hereinafter described.</p> <p>The course of this half mile, therefore, is N.0°19'W., and the dist. is 39.55 chs.</p> <p>From the $\frac{1}{4}$ sec. cor.</p> <p>North, with continuous measurement.</p> |
| 79.27 | <p>Fall 20 lks. E. of the cor. secs. 1, 6, 7, and 12, hereinafter described.</p> <p>The course of this half mile, therefore, is N.0°17'W., and the dist. is 79.27 chs.</p> |
| 39.75 | <p>North, bet. secs. 1 and 6.</p> <p>Fall 22 lks. E. of the $\frac{1}{4}$ sec. cor. secs. 1 and 6, hereinafter described.</p> <p>The course of this half mile, therefore, is N.0°19'W., and the dist. is 39.75 chs.</p> |

DEPENDENT RESURVEY OF THE WEST BOUNDARY, T. 28 S., R. 14 W.

Chains


From the $\frac{1}{4}$ sec. cor. ...
 North, with continuous measurement.
 Fall 6 lks. E. of the cor. Tps. 27 and 28 S., Rs. 14 and 15 W., heretofore described.
 The course of this half mile, therefore, is N. $0^{\circ}5'W.$, and the dist. is 40.09 chs.

TRUE LINES

From the cor. Tps. 28 and 29 S., Rs. 14 and 15 W., heretofore described.
 N. $1^{\circ}22'E.$, on true line bet. secs. 31 and 36.
 Over rolling mountainous land, through dense timber and undergrowth; asc. gradual SE. slope.
 5.00 Top of spur, 20 ft. above tp. cor., projects N., from S. $20^{\circ}W.$; desc. gradually along top of spur.
 11.00 Base of descent from spur, 50 ft. below top, bears E. and W.
 18.80 Wide draw, 10 ft. below base of descent, drains NW.; asc. gradual SW. slope.
 30.00 Spur, 30 ft. above draw, projects SW; desc. gradual NW. slope.
 40.01 On gradual NW. slope, 60 ft. below spur; the $\frac{1}{4}$ sec. cor. secs. 31 and 36; a sandstone 10x10x8 ins., mkd. $\frac{1}{4}$ on W. face, from which

- A juniper, 10 ins. diam., bears S. $38^{\circ}30'W.$, 53 lks. dist., mkd. $\frac{1}{4}$ S 36 B T.
- A juniper, 6 ins. diam., bears S. $75^{\circ}30'E.$, 50 lks. dist., mkd. $\frac{1}{4}$ S 31 B T.

At the cor. point.
 Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground, to solid rock, and in a mound of stone to top, with the original corner monument deposited alongside, for $\frac{1}{4}$ sec. cor., with brass cap mkd.



Thence
 N. $0^{\circ}06'W.$, with continuous measurement.
 43.30 Wash, 50 lks. wide, 4 ft. deep, in bottom of wide draw, 10 ft. below the $\frac{1}{4}$ sec. cor., drains NE.
 51.00 Base of steep ascent over S. slope, bears E. and W.
 60.20 Spur, 150 ft. above base, projects N. $80^{\circ}E.$; desc. steep N. slope.

DEPENDENT RESURVEY OF THE WEST BOUNDARY, T. 28 S. R. 14 W.

| Chains | Remarks | | | | | | | | | | | | |
|--------|--|------|--|------|------|-----|-----|-------|--|-----|-----|------|--|
| 73.50 | Small draw, 70 ft. below spur, drains S. 85° E.; asc. gradual S. slope. | | | | | | | | | | | | |
| 79.78 | The cor. secs. 25, 30, 31 and 36, a volcanic stone, 15x12 1/2 ins., mkd. 5 notches on N. edge and 1 notch on the S. edge; cor. is witnessed by three bearing trees as follows: A juniper, 6 ins. diam., bears N. 17° 15' E., 21 lks. dist., mkd. S 30 B T. I. remark. this tree T 28 S R 14 W S 30 B T. A juniper, 12 ins. diam., bears S. 73° 30' E., 22 lks. dist., mkd. T 28 S R 14 W S 31 B T. A juniper, 10 ins. diam., bears N. 56° W., 19 lks. dist., mkd. T 28 S R 15 W S 25 B T. | | | | | | | | | | | | |
| | At the cor. point. | | | | | | | | | | | | |
| | Set an iron post, 3 ft. long, 2 ins. diam., .27 ins. in the ground, with the original cor. monument deposited alongside, for cor. secs. 25, 30, 31 and 36, with brass cap mkd. | | | | | | | | | | | | |
| | <table border="1" style="margin-left: auto; margin-right: auto;"> <tr><td colspan="2" style="text-align: center;">T28S</td></tr> <tr><td style="text-align: center;">R15W</td><td style="text-align: center;">R14W</td></tr> <tr><td style="text-align: center;">S25</td><td style="text-align: center;">S30</td></tr> <tr><td colspan="2" style="text-align: center;">-----</td></tr> <tr><td style="text-align: center;">S36</td><td style="text-align: center;">S31</td></tr> <tr><td colspan="2" style="text-align: center;">1936</td></tr> </table> | T28S | | R15W | R14W | S25 | S30 | ----- | | S36 | S31 | 1936 | |
| T28S | | | | | | | | | | | | | |
| R15W | R14W | | | | | | | | | | | | |
| S25 | S30 | | | | | | | | | | | | |
| ----- | | | | | | | | | | | | | |
| S36 | S31 | | | | | | | | | | | | |
| 1936 | | | | | | | | | | | | | |
| | I mark an additional bearing tree to cor. as follows: | | | | | | | | | | | | |
| | A juniper, 12 ins. diam., bears S. 49° 30' W., 39 lks. dist., mkd. T28SR15WS36BT. | | | | | | | | | | | | |
| | Land; rolling and mountainous, with general northwesterly exposure and drainage on the south portion of mile and a general northeasterly exposure and drainage on the north portion of the mile. | | | | | | | | | | | | |
| | Soil, shallow light colored clay and sand, from 1 to 3 ft. deep, mixed with rock and gravel, lying on volcanic bed-rock; 4th rate. Volcanic formation. | | | | | | | | | | | | |
| | Undergrowth, shadscale, yellowtop, sagebrush, Russian thistle, grass and weeds. | | | | | | | | | | | | |
| | Timber, juniper and pinon. | | | | | | | | | | | | |
| | Fair winter grazing land. | | | | | | | | | | | | |
| | N. 0° 04' E., bet. secs. 25 and 30. | | | | | | | | | | | | |
| | Over rolling mountainous land, through scattering timber and dense undergrowth; asc. gradual S. slope. | | | | | | | | | | | | |
| 5.00 | Low ridge, 20 ft. above sec. cor., bears E. and W., desc. gradual NW. slope. | | | | | | | | | | | | |
| 32.40 | Draw, 50 ft. below ridge, drains NE. | | | | | | | | | | | | |
| 33.70 | Low spur, 20 ft. above draw, projects NE., 50 lks. dist. to land. | | | | | | | | | | | | |

DEPENDENT RESURVEY OF THE WEST BOUNDARY, T. 28 S., R. 14 W.

Chains

34.00 Old Salt Lake City to Pioche, Nevada, wagon road, bears NE. and SW.


34.80 Draw, 20 ft. below spur, drains E., 100 lks. dist., to junction with last draw draining NE.; asc. gradual S. slope.

40.20 The 1/4 sec. cor. secs. 25 and 30, a volcanic stone, 18x12x12 ins., mkd. 1/4 on W. face; cor. is witnessed by one bearing tree as follows:

A juniper, 18 ins. diam., bears S. 8°45'E., 19 lks. dist., mkd. 1/4 S 30 B T.

At the cor. point.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with the original cor. monument deposited alongside, for 1/4 sec. cor., with brass cap mkd.



No other bearing trees available.

Thence

N. 0°09'E., with continuous measurement.

52.00 Spur, 80 ft. above the 1/4 sec. cor., projects NE.; desc. gradual NW. slope.

63.60 Draw, 90 ft. below spur, drains E.; asc. gradual S. slope.


72.30 Spur, 130 ft. above draw, projects N. 80°E.; desc. gradual N. slope.

79.00 Draw, 90 ft. below spur, drains N. 80°E.

80.25 On gradual SE. slope; the cor. secs. 19, 24, 25, and 30, a volcanic stone 12x10x10 ins., mkd. 4 notches on N. edge and 2 notches on the S. edge. Cor. has no accessories.

At the cor. point.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, with the original cor. monument deposited alongside, for cor. secs. 19, 24, 25, and 30, with brass cap mkd.



1936

from which

A juniper, 12 ins. diam., bears N. 19°45'E., 222 lks. dist., mkd. T 28 S R 14 W S 19 B T.

A juniper, 10 ins. diam., bears S. 11°15'E., 156 lks. dist., mkd. T 28 S R 14 W S 30 B T.

A juniper, 15 ins. diam., bears S. 52°45'W., 148 lks. dist., mkd. T 28 S R 15 W S 25 B T.

DEPENDENT RESURVEY OF THE WEST BOUNDARY, T. 28 S., R. 14 W.

Chains

adlanO

A juniper, 12 ins. diam., bears N. 41°15'W., 199 lks. dist., mkd. T 28 S R 15 W S 24 B T.

Land, rolling, and mountainous with general northeasterly exposure and drainage.

Soil, shallow light colored clay and sand, from 1 to 3 ft. deep, mixed with rock and gravel, lying on volcanic bedrock 4th rate. Volcanic formation.

Undergrowth, sagebrush, shadscale, yellowtop, grass and weeds.

Timber, juniper and pinon.

Fair winter grazing land.

N. 0°07'E., bet. secs. 19 and 24.

Over rolling mountainous land, through scattering timber and undergrowth; asc. gradual SE. slope.

- 4.20 Spur, 50 ft. above sec. cor. projects N. 80°E.; desc. gradual NW. slope.
- 9.40 Draw, 80 ft. below spur, drains E.; asc. gradual SE. slope.
- 14.50 Spur, 80 ft. above draw, projects N. 80°E.; desc. gradual NW. slope.
- 20.50 Draw, 90 ft. below spur, drains N. 80°E.; asc. gradual SE. slope.
- 40.04 The $\frac{1}{4}$ sec. cor. secs. 19 and 24, a volcanic stone 12x12x4 ins., mkd. $\frac{1}{4}$ on W. face. Cor. has no accessories.
At the cor. point.
Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground, to solid rock and in a mound of stone to top, with the original cor. monument deposited alongside, for $\frac{1}{4}$ sec. cor., with brass cap mkd.



No suitable bearing trees available.

Thence

N. 0°07'E., with continuous measurement.

- 43.50 Spur, 20 ft. above the $\frac{1}{4}$ sec. cor., projects NE.; leave scattering timber, bears NE. and SW; desc. gradual NW. slope.
- 52.50 Rocky gulch, 120 ft. below spur, drains S. 80°E.; asc. steep, rocky SE. slope.
- 62.50 Rocky spur, 200 ft. above gulch, projects NE.; desc. gradual NW. slope.
- 77.00 Draw, 190 ft. below spur, drains NE.; asc. gradual SE. slope.

DEPENDENT RESURVEY OF THE WEST BOUNDARY, T. 28 S., R. 14 W.


Chains

80.00

On SE. slope, 60 ft. above draw; the cor. secs. 13, 18, 19 and 24, a volcanic stone 18x10x10 ins., mkd. 3 notches on the N. and S. edges. Cor. has no accessories.

At the cor. point.

Set an iron post, 3 ft. long, 2 ins. diam., 18 ins. in the ground, to solid rock, and in a mound of stone to top, with the original cor. monument deposited alongside for cor. secs. 13, 18, 19 and 24, with brass cap mkd.



Land, rolling and mountainous with general northeasterly exposure and drainage.

Soil, shallow light colored clay, from 1 to 2 ft. deep, lying on volcanic bedrock; volcanic formation.

Undergrowth, sagebrush, yellowtop, shadscale, Russian thistle, grass and weeds.

Timber, juniper and pinon on S. portion of mile.

Fair winter grazing land.

North, bet. secs. 13 and 18.

Over rolling mountainous land, through scattering short undergrowth; asc. steep SE. slope.

22.00


Ridge, 470 ft. above sec. cor. bears NE. and SW.; desc. steep NW. slope.

40.00

On steep, rocky NW. slope, 240 ft. below ridge; the $\frac{1}{4}$ sec. cor. secs. 13 and 18, a volcanic stone 18x12x12 ins., mkd. $\frac{1}{4}$ on W. face. Cor. has no accessories.

At the cor. point.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with the original cor. monument deposited alongside, for $\frac{1}{4}$ sec. cor., with brass cap mkd.



raise a mound

of stone, 3 ft. base, 2 ft. high, W. of cor.

Thence

N. 2°31'W., with continuous measurement.

67.00

Large draw, 260 ft. below $\frac{1}{4}$ sec. cor., drains NE.; asc. gradually over rolling NE. slope.

DEPENDENT RESURVEY OF THE WEST BOUNDARY, T. 28 S., R. 14 W.

Chains

69.10 Old road, bears NE. and SW.

78.39 The cor. originally for secs. 7, 12, 13 and 18, a volcanic stone 24x15x12 ins., mkd. 4 notches on the S. edge and 2 notches on the N. edge. Cor. has no accessories.

At the cor. point.

Set an iron post, 3 ft. long; 2 ins. diam., 27 ins. in the ground, with the cor. monument alongside; for cor. secs. 12 and 13, T. 28 S., R. 15 W., with brass cap mkd.

| | |
|------|------|
| T28S | T28S |
| S12 | R14W |
| S13 | S18 |
| R15W | |

1936

raise a mound of stone, 4 ft. base, 3 ft. high, W. of cor.

Land, rolling and mountainous, with general northeasterly and northwesterly exposure and drainage.

Soil, shallow light colored clay, from 1 to 3 ft. deep, mixed with rock and gravel, lying on volcanic bedrock; 4th rate. Volcanic formation.

Undergrowth, sagebrush, shadscale, yellowtop, Russian thistle, grass and weeds.

No timber.

Fair winter grazing land.

N.0°19'W., along the E. bdy. of sec. 12, T. 28 S., R. 15 W.

Over rolling mountainous land, through dense short undergrowth.

1.70 The closing cor. secs. 7 and 18, T. 28 S., R. 14 W., subsequently set at this point.

5.50 Draw, 10 ft. below sec. cor., drains E., asc. gradual SE. slope.

12.50 Low spur, 60 ft. above draw, projects E. about 5.00 chs. dist. to end; desc. gradual NE. slope.

19.30 Draw, 60 ft. below spur, drains E., asc. steep, rocky SE. slope.

34.50 Top of high volcanic spur, 300 ft. above draw, projects N. 80°E.; desc. gradual NE. slope.

39.55 The $\frac{1}{4}$ sec. cor. originally for secs. 7 and 12, a volcanic stone, 18x12x12 ins., mkd. $\frac{1}{4}$ on W. face. Cor. has no accessories.

At the cor. point.

Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground, to solid rock, and in a mound of stone to top, with

DEPENDENT RESURVEY OF THE WEST BOUNDARY, T. 28 S., R. 14 W.

Chains

the original cor. monument deposited alongside for 1/4 sec. cor. sec. 12, with brass cap mkd.

1/4 S12
1936

Thence

N.0°17'W., with continuous measurement.

41.73 1/2

Point midway bet. closing cor. of secs. 7 and 18, and secs. 6 and 7.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/4 sec. cor. of sec. 7, with brass cap mkd.

1/4 S 7
1936

raise a mound of stone, 4 ft. base, 3 ft. high, E. of cor.

56.50

Draw, 200 ft. below volcanic spur, drains NE.; asc. steep SE. slope.

68.50

Spur, 100 ft. above draw, projects NE.; desc. steep NW. slope.

79.27

On steep NW. slope, 150 ft. below spur; the cor. originally for secs. 1, 6, 7, and 12, a volcanic stone 12x10x10 ins., mkd. 5 notches on the S. edge, and 1 notch on the N. edge. Cor. has no accessories.

At the cor. point.

Set an iron post, 3 ft. long, 2 ins. diam., 18 ins. in the ground, to solid rock, and in a mound of stone, to top, with the original cor. monument deposited alongside, for cor. secs. 1 and 12, T. 28 S., R. 15 W., with brass cap mkd.

T28S
S1 | T28S
R14W
S7
S12 |
R16W
1936

Land, rolling and mountainous, with general northeasterly exposure and drainage.

Soil, shallow light colored clay; from 1 to 2 ft. deep, mixed with rock and gravel lying on volcanic bedrock; 4th rate. Volcanic formation.

Undergrowth, sagebrush, yellowtop, shadscale, Russian thistle, grass and weeds.

No timber.

Fair winter grazing land.

DEPENDENT RESURVEY OF THE WEST BOUNDARY, T. 28 S., R. 14 W.

Chains

N. 0°19'W., along the E. bdy. sec. 1, T. 28 S., R. 15 W.
Over rolling mountainous land, through dense short undergrowth; desc. steep NW. slope.

2.50 The closing cor. secs. 6 and 7, T. 28 S., R. 14 W., subsequently set at this point.

22.00 Base of mountainous land, 320 ft. below sec. cor., bears NE. and SW.; thence over rolling land, at the W. side of Wah Wah Valley.

28.50 Old road, bears E. and W.

39.75 The $\frac{1}{4}$ sec. cor. originally for secs. 1 and 6, a volcanic stone 24x24x24 ins., mkd. $\frac{1}{4}$ on W. face. Cor. has no accessories.

At the cor. point.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with the original cor. monument deposited alongside, for $\frac{1}{4}$ sec. cor. sec. 1, with brass cap mkd.

$\frac{1}{4}$ S 1
 |
 1936

raise a mound
of stone, 4 ft. base, 3 ft. high, W. of cor.

Thence

N. 0°05'W., with continuous measurement.

40.00 Point which is a northing of 40.00 chs. from the closing cor. secs. 6 and 7, T. 28 S., R. 14 W.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for the $\frac{1}{4}$ sec. cor. sec. 6, with brass cap mkd.

$\frac{1}{4}$ S 6
 |
 1936

raise a mound
of stone, 3 ft. base, 2 ft. high, E. of cor.

71.40 Rush, 40 lks. wide, 8 ft. deep, drains E.

76.00 Dirt road, bears N. 30°E., and S. 30°W.

79.14 The cor. tps. 27 and 28 S., Rs. 14 and 15 W., heretofore described.

Land, S. 22.00 chs. is rolling and mountainous; balance of mile is gently rolling bottom of Wah Wah Valley, with general northeasterly exposure and drainage.

Soil, shallow light colored clay, from 1 to 3 ft. deep, mixed with rock and gravel; 4th rate, Volcanic formation.

Undergrowth, sagebrush, yellowtop, shadescale, Russian thistle, grass and weeds.

No timber.

SUBDIVISION OF T. 28 S., R. 14 W.

Chains


Fair winter grazing land.

SUBDIVISION OF T. 28 S., R. 14 W.

From the cor. secs. 35 and 36, on the S. bdy. of the tp., heretofore described.

N. 0°05'E., bet. secs. 35 and 36, parallel to the mean course of the E. bdy. of the tp.

- 00.00 Over gently rolling bottom of Wah Wah Valley, through dense short undergrowth.
- .50 Wash, 10 lks. wide, 3 ft. deep, in bottom of shallow draw, drains N. 60°W.
- 11.00 Low rise, 15 ft. above draw, bears NW. and SE.
- 26.80 Traveled road, bears N. 35°E. and S. 35°W.
- 30.00 Wash, 20 lks. wide, 1 ft. deep, in bottom of wide draw, 40 ft. below rise, drains NW.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.




raise a mound

of stone, 3 ft. base, 2 ft. high, W. of cor.

- 56.70 Rise, 20 ft. high, bears E. and W.
- 66.20 Wash, 50 lks. wide, 4 ft. deep, in bottom of large draw, 30 ft. below rise, drains SW.
- 74.60 Old road, bears N. 80°E. and S. 80°W.
- 80.00 On nearly level land.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. secs. 25, 26, 35 and 36, with brass cap mkd.



raise a mound

of stone, 3 1/2 ft. base, 2 1/2 ft. high, W. of cor.

Land, gently rolling bottom of Wah Wah Valley, with general northwesterly exposure and drainage.

Soil, light colored sand and clay, from 1 to 4 ft. deep, mixed with rock and gravel, with rocky surface; 4th rate.

SUBDIVISION OF T. 28 S., R. 14 W.

Chains

AM18.00

Undergrowth, sagebrush, shadscale, yellowtop, Russian thistle, grass and weeds.

No timber.

Fair winter grazing land.

East, on a random line, bet. secs. 25 and 36.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

79.80 Intersect E. bdy. of tp., 5 lks. S. of cor. secs. 25 and 36, heretofore described.

Thence

S. $89^{\circ}58'W.$, on true line bet. secs. 25 and 36.

Over gently rolling bottom of Wah Wah Valley, through dense short undergrowth.

2.00 Wash, 30 lks. wide, 4 ft. deep, drains NW.

6.70 Same wash, 30 lks. wide, 4 ft. deep, drains S. $60^{\circ}W.$

30.80 Wash, 50 lks. wide, 4 ft. deep, in bottom of wide draw, drains N. $60^{\circ}W.$

33.90 Road, bears N. $60^{\circ}W.$ and S. $60^{\circ}E.$

39.90 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$\frac{1}{4}$ S25
S36

1936

of stone, 3 ft. base, 2 ft. high, N. of cor. raise a mound

51.90 Road, bears N. $20^{\circ}W.$ and S. $20^{\circ}E.$

56.00 Traveled road, bears NE. and SW.

79.80 The cor. secs. 25, 26, 35 and 36.

Land, gently rolling bottom of Wah Wah Valley, with general northwesterly exposure and drainage.

Soil, light colored sand and clay, from 2 to 4 ft. deep, mixed with rock and gravel; 4th rate.

Undergrowth, sagebrush, yellowtop, shadscale, Russian thistle, grass and weeds.

No timber.

Fair winter grazing land.

N. $0^{\circ}05'E.$, bet. secs. 25 and 26.


Over level bottom of Wah Wah Valley, through dense short

SUBDIVISION OF T. 28 S., R. 14 W.

Chains

40.00

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.



raise a mound


of stone, 3 ft. base, 2 ft. high, W. of cor.

72.50

Swale, 3 ft. deep, drains NW.

80.00

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground for cor. secs. 23, 24, 25, and 26, with brass cap mkd.



raise a mound

of stone, 3 ft. base, 2 ft. high, W. of cor.

Land, level bottom of Wah Wah Valley, with general north-westerly exposure and drainage.

Soil, light colored sand and clay, from 1 to 4 ft. deep, mixed with rock and gravel; 4th rate.

Undergrowth, sagebrush, shadscale, yellowtop, Russian thistle, grass and weeds.

No timber.

Fair winter grazing land.

N. 89°58'E., on a random line bet. secs. 24 and 25.

40.00

Set temp. $\frac{1}{4}$ sec. cor.

79.64

Intersect the E. bdy. of Tp., 3 lks. S. of cor. secs. 24 and 25, heretofore described.

Thence

S. 89°57'W., on true line bet. secs. 24 and 25.

Over gently rolling bottom of Wah Wah Valley, through dense short undergrowth.

12.10

Rise, 10 ft. high, bears NW. and SE.

21.10

Traveled road, bears NE. and SW.

31.10

Volcanic outcropping 10 ft. high, bears N. 30 lks. dist. to end and S. 70 lks. dist. to end.

SUBDIVISION OF T. 28 S., R. 14 W.

Chains

39.82 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/4 sec. cor., with brass cap mkd.



1936

raise a mound

of stone, 4 ft. base, 3 ft. high, N. of cor.

60.00 Wash, 60 lks. wide, 5 ft. deep, in bottom of wide shallow draw, drains NW.

79.64 The cor. secs. 23, 24, 25 and 26.

Land, gently rolling, with general northwesterly exposure and drainage.

Soil, light colored sand and clay, from 2 to 4 ft. deep, mixed with rock and gravel, lying on a heavy clay subsoil, 4th rate.

Undergrowth, sagebrush, shadscale, yellowtop, Russian thistle, grass and weeds.


No timber.

Fair winter grazing land.

N. 0°05'E., bet. secs. 23 and 24.

Over rocky level bottom of Wah Wah Valley, through dense short undergrowth.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/4 sec. cor. with brass cap mkd.



raise a mound


of stone, 3 ft. base, 2 ft. high, W. of cor.

45.10 Wash, 60 lks. wide, 4 ft. deep, drains N. 30°W.

68.90 Dim road, bears NE. and SW.

79.60 Dim road, bears N. 60°E. and S. 60°W.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. secs. 13, 14, 23, and 24, with brass cap mkd.



1936

SUBDIVISION OF T. 28 S., R. 14 W.

Chains

raise a mound

of stone, 3 ft. base, 2 ft. high, W. of cor.

Land, nearly level, with general northwesterly exposure and drainage.

Soil, light colored sand and clay, from 2 to 4 ft. deep, mixed with rock and gravel, lying on a heavy clay subsoil; 4th rate.

Undergrowth; sagebrush, yellowtop, shadscale, Russian thistle, grass and weeds.

No timber.

Fair winter grazing land.

N. 89°57'E., on a random line, bet. secs. 13 and 24.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

79.78 Intersect E. bdy. of Tp., 5 lks. N. of cor. secs. 13 and 24, heretofore described.

Thence

S. 89°59'W., on true line bet. secs. 13 and 24.

Over level bottom of Wah Wah Valley, through dense short undergrowth.

12.10 Wash, 60 lks. wide, 5 ft. deep, drains NW.

32.90 Swale, 5 ft. deep, drains NW.

39.89 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$\frac{1}{4}$ $\frac{S\ 13}{S\ 24}$

1936

raise a mound

of stone, 4 ft. base, 3 ft. high, N. of cor.

43.10 Swale, 10 ft. deep, drains N.30°W.

65.60 Road, bears NE. and SW.

78.90 Road, bears N. 60°E. and S. 60°W.

79.78 The cor. secs. 13, 14, 23 and 24.

Land, level bottom of Wah Wah Valley, with general northwesterly exposure and drainage:

Soil, light colored sand and clay, from 2 to 4 ft. deep, mixed with rock and gravel; 3rd rate. Volcanic formation.

Undergrowth, sagebrush, yellowtop, shadscale, Russian thistle, grass and weeds.

No timber.

SUBDIVISION OF T. 28 S., R. 14 W.


Chains

Fair winter grazing land.

N. 0°05'E., bet. secs. 13 and 14.

Over level bottom of Wah Wah Valley, through dense short undergrowth.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/4 sec. cor., with brass cap mkd.




raise a mound

of stone, 4 ft. base, 3 ft. high, W. of cor.

65.00 Swale, 5 ft. deep, drains NW.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. secs. 11, 12, 13 and 14, with brass cap mkd.



raise a mound

of stone, 3 ft. base, 2 ft. high, W. of cor.

Land, level bottom of Wah Wah Valley, with general north-westerly exposure and drainage.

Soil, light colored sand and clay, from 2 to 4 ft. deep, mixed with rock and gravel, lying on a heavy clay sub-soil; 4th rate.

Undergrowth, sagebrush, yellowtop, shadscale, Russian thistle, grass and weeds.

No timber.

Fair winter grazing land.

N. 89°59'E., on a random line bet. secs. 12 and 13:

40.00 Set temp. 1/4 sec. cor.

79.88 Intersect E. bdy. of tp., 3 lks. N. of the cor. secs. 12 and 13, heretofore described.

Thence

West, on true line bet. secs. 12 and 13.

SUBDIVISION OF T. 28 S., R. 14 W.


Chains

Over rolling bottom of Wah Wah Valley, through dense short undergrowth.

15.50 Wash, 30 lks. wide, 2 ft. deep, drains NW.

22.00 Swale, 10 ft. deep, drains NW.

39.94 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/4 sec. cor., with brass cap mkd.



1936

raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.

51.10 Wash, 10 lks. wide, 5 ft. deep, drains NW.

54.40 Wash, 20 lks. wide, 3 ft. deep, drains NW.

66.60 Wash, 15 lks. wide, 5 ft. deep, drains N.30°W.

73.30 Swale, 10 ft. deep, drains N.30°W.

79.88 The cor. secs. 11, 12, 13 and 14.

Land, rolling bottom of Wah Wah Valley, with general northwesterly exposure and drainage.

Soil, light colored sand and clay, from 2 to 4 ft. deep, mixed with rock and gravel; 3rd rate.

Undergrowth, sagebrush, shadscale, yellowtop, Russian thistle, grass and weeds.

No timber.

Fair winter grazing land.


N.0°05'E., bet. secs. 11 and 12.

Over nearly level land, of Wah Wah Valley, through dense short undergrowth.

9.20 Wash, 30 lks. wide, 6 ft. deep, drains N.30°W.

29.60 Wash, 40 lks. wide, 5 ft. deep, in bottom of wide shallow draw, 10 ft. deep, drains NW.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/4 sec. cor., with brass cap mkd.



1936

raise a mound of stone, 4 ft. base, 3 ft. high, W. of cor.


60.20 Dim road, bears N.60°W. and S. 60°E.

SUBDIVISION OF T. 28 S., R. 14 W., SE

Chains

eried0

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. secs. 1, 2, 11, and 12, with brass cap mkd.



raise a mound

of stone, 4 ft. base, 3 ft. high, W. of cor.

Land, rolling bottom of Wah Wah Valley, with general north-westerly exposure and drainage.

Soil, light colored sand and clay, from 2 to 4 ft. deep, mixed with rock and gravel; 3rd rate.

Undergrowth, sagebrush, yellowtop, Russian thistle, grass and weeds.

No timber.

Fair winter grazing land.

East, on a random line, bet. secs. 1 and 12.

40.00 Set temp. 1/4 sec. cor.


79.90 Intersect the E. bdy. of tp., at the cor. secs. 1 and 12, heretofore described.

Thence

West, on true line, bet. secs. 1 and 12.

Over rolling bottom of Wah Wah Valley, through dense short undergrowth.

39.95 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/4 sec. cor., with brass cap mkd.



raise a mound

of stone, 4 ft. base, 3 ft. high, N. of cor.

49.70 Wash, 40 lks. wide, 1 ft. deep, drains N.60°W.

77.40 Wash, 10 lks. wide, 1 ft. deep, drains N.

79.90 The cor. secs. 1, 2, 11, and 12.

Land, rolling bottom of Wah Wah Valley, with general north-westerly exposure and drainage.

Soil, light colored sand and clay, from 2 to 4 ft. deep,

SUBDIVISION OF T. 28 S., R. 14 W.

Chains

mixed with rock and gravel, lying on a heavy clay subsoil; 3rd rate.

Undergrowth, sagebrush, shadscale, yellowtop, Russian thistle, grass and weeds.

No timber.

Fair winter grazing land.

N. 0°05'E., on a random line, bet. secs. 1 and 2.

40.00 Set temp. 1/4 sec. cor.

76.76 Intersect the N. bdy. of tp., 42 lks. E. of the cor. secs. 1, 2, 35 and 36, heretofore described.


Thence:

S. 0°14'E., on true line bet. secs. 1 and 2.

Over rolling bottom of Wah Wah Valley, through dense short undergrowth.

35.60 Dim road, bears NW. and SE.

36.76 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/4 sec. cor., with brass cap mkd.



raise a mound

of stone, 4 ft. base, 3 ft. high, W. of cor.

64.20 Old Salt Lake City to Pioche, Nevada, wagon road, bears NE. and SW.

76.76 The cor. secs. 1, 2, 11 and 12.

Land, nearly level, with general northerly exposure and drainage.

Soil, light colored sand and clay; from 2 to 4 ft. deep, mixed with rock and gravel, lying on a heavy clay subsoil; 3rd rate.

Undergrowth, sagebrush, yellowtop, shadscale, Russian thistle, grass and weeds.

No timber.

Fair winter grazing land.

From the cor. secs. 34, and 35, on the S. bdy. of the tp., heretofore described.

N. 0°05'E., bet. secs. 34 and 35.

SUBDIVISION OF T. 28 S., R. 14 W.

Chains

Over nearly level bottom of Wah Wah Valley, through dense short undergrowth.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground for $\frac{1}{4}$ sec. cor., with brass cap mkd.




raise a mound

of stone, 4 ft. base, 3 ft. high, W. of cor.

44.00 Small draw, 6 ft. deep, drains NE.

50.00 Small draw, 8 ft. deep, drains NE.

50.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. secs. 26, 27, 34 and 35, with brass cap mkd.



raise a mound

of stone, 3 ft. base, 2 ft. high, W. of cor.

Land, nearly level, with general northwesterly exposure and drainage.

Soil, light colored sand and clay, from 2 to 4 ft. deep, mixed with rock and gravel; 4th rate.

Undergrowth, sagebrush, shadscale, yellowtop, Russian thistle, grass and weeds.

No timber.

Fair winter grazing land.

East, on a random line, bet. secs. 26 and 35.

41.00 Set temp. $\frac{1}{4}$ sec. cor.

79.98 Intersect N. and S. line, at the cor. of secs. 25, 26, 35, and 36.

Hence

West, on true line bet. secs. 26 and 35.

Over nearly level bottom of Wah Wah Valley, through dense short undergrowth.


37.60 Large wash, 160 lks. wide, 5 ft. deep, drains NW.

39.40 Wash, 70 lks. wide, 6 ft. deep, heads S. about 1.50 chs. dist., drains N. 30°E. to junction with last wash.

SUBDIVISION OF T. 28 S., R. 14 W.

Chains

39.99 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/4 sec. cor., with brass cap mkd.



raise a mound

of stone, 4 ft. base, 3 ft. high, N. of cor.

41.60 Old road, bears N. and S.

70.00 Draw, 8 ft. deep, drains N. 30°E.

79.98 The cor. secs. 26, 27, 34, and 35.

Land, nearly level, with general northerly exposure and drainage.

Soil, light colored sand and clay; from 2 to 4 ft. deep, mixed with rock and gravel; 3rd rate.

Undergrowth, sagebrush, shadscale, yellowtop, Russian thistle, grass and weeds.

No timber.


Fair winter grazing land.

N. 0°05'E., bet. secs. 26 and 27.

Over rolling bottom of Wah Wah Valley, through dense short undergrowth.

30.00 Wide swale, 3 ft. deep, drains NE.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground, to solid rock, and in a mound of stone to top, for 1/4 sec. cor., with brass cap mkd.



deposit a volcanic

stone, 6x6x4 ins. at base of iron post, mkd. X.

54.20 Draw, 10 ft. deep, drains NE.

59.00 Old road, bears NE. and SW.

60.00 Rise, 10 ft. high, bears NE. and SW.


69.00 Wide draw, 10 ft. deep, drains NE.

75.00 Rise, 10 ft. high, bears NE. and SW.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. secs. 22, 23, 26, and 27, with brass cap mkd.

SUBDIVISION OF T. 28 S., R. 14 W.

Chains



raise a mound

of stone, 4 ft. base, 3 ft. high, W. of cor.

Land, rolling, with general northeasterly exposure and drainage.

Soil, light colored sand and clay, from 1 to 4 ft. deep, mixed with rock and gravel; 3rd rate.

Undergrowth, sagebrush, yellowtop, shadscale, Russian thistle, grass and weeds.

No timber.

Fair winter grazing land.

East, on a random line, bet. secs. 23 and 26.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

79.96 Intersect N. and S. line, 3 lks. S. of the cor. secs. 23, 24, 25 and 26.

Thence


S. $89^{\circ}59'W.$, on true line bet. secs. 23 and 26.

Over nearly level bottom of Wah Wah Valley, through dense short undergrowth.

2.80 Swale, 10 ft. deep, drains N. $30^{\circ}W.$

16.80 Swale, 10 ft. deep, drains N. $30^{\circ}W.$

39.98 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.



1936

raise a mound

of stone, 4 ft. base, 3 ft. high, N. of cor.

42.90 Swale, 10 ft. deep, drains NW.

55.30 Wash 100 lks. wide, 4 ft. deep, drains N.

58.90 Old road, bears N. $30^{\circ}E.$ and S. $30^{\circ}W.$

79.96 The cor. secs. 22, 23, 26, and 27.

Land, nearly level, with general northwesterly exposure and drainage.

SUBDIVISION OF T. 28 S., R. 14 W.

Chains

Soil, light colored sand and clay, from 2 to 4 ft. deep, mixed with rock and gravel; 3rd rate.

Undergrowth, sagebrush, shadscale, yellowtop, Russian thistle, grass and weeds.

No timber.

Fair winter grazing land.

N. 0°05'E., bet. secs. 22 and 23.

Over nearly level bottom of Wah Wah Valley, through dense short undergrowth.


12.00 Low, rolling rise, 10 ft. high, bears N.60°E. and S.60°W.

20.00 Swale, 10 ft. deep, drains N.70°E.

26.50 Low, rolling rise, 10 ft. high, bears NE. and S.60°W.

37.40 Low, rolling rise, 10 ft. high, bears NE. and SW.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/4 sec. cor., with brass cap mkd.



raise a mound

of stone, 4 ft. base, 3 ft. high, W. of cor.

44.60 Dim road, bears NE. and SW.


45.00 Swale, 10 ft. deep, drains NE.

51.50 Low, rolling rise, 10 ft. high, bears NE. and SW.

60.00 Swale, 10 ft. deep, drains NE.

75.00 Low, rolling rise, 20 ft. high, bears NE. and SW.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. secs. 14, 15, 22, and 23, with brass cap mkd.



raise a mound

of stone, 4 ft. base, 3 ft. high, W. of cor.

Land, nearly level, with general northeasterly exposure and drainage.

Soil, light colored sand and clay, from 2 to 4 ft. deep, mixed with rock and gravel; 3rd rate.

SUBDIVISION OF T. 28 S., R. 14 W.

| | |
|--------|--|
| Chains | |
| | Undergrowth, sagebrush, shadscale, yellowtop, Russian thistle, grass and weeds. |
| | No timber. |
| | Fair winter grazing land. |
| | N.89°59'E., on a random line bet. secs. 14 and 23. |
| 40.00 | Set temp. $\frac{1}{4}$ sec. cor. |
| 79.96 | Intersect N. and S. line, 3 lks: N. of the cor. secs. 13, 14, 23 and 24. |
| | Thence |
| | West, on true line bet. secs. 14 and 23. |
| | Over nearly level bottom of Wah Wah Valley, through medium dense short undergrowth. |
| 18.40 | Old road, bears NW. and SE. |
| 20.80 | Wash, 80 lks. wide, 5 ft. deep, drains NW. |
| 39.98 | Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd. |
| | $\frac{1}{4}$ <u>S14</u> S23 1936 |
| | raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor. |
| 41.60 | Draw, 10 ft. deep, drains N.30°W. |
| 45.00 | Low, rolling rise, 10 ft. high, bears N.30°W. and S.30°E. |
| 52.50 | Wash, 2.70 chs. wide, 10 ft. deep, drains N.20°E. |
| 54.00 | Old road, bears N.10°E. and S.30°E. |
| 60.00 | Swale, 10 ft. deep, drains NE. |
| 74.00 | Low, rolling rise, 10 ft. high, bears NE. and SW. |
| 79.96 | The cor. secs. 14, 15, 22, and 23. |
| | Land, nearly level, with general northerly exposure and drainage. |
| | Soil, light colored sand and clay, from 2 to 4 ft. deep, mixed with rock and gravel; 3rd rate. |
| | Undergrowth, sagebrush, shadscale, yellowtop, Russian thistle, grass and weeds. |
| | No timber. |
| | Fair winter grazing land. |

SUBDIVISION OF T. 28 S., R. 14 W.

Chains


N. 0°05'E., bet. secs. 14 and 15.
Over nearly level bottom of Wah Wah Valley, through medium dense undergrowth.

4.10 Swale, 10 ft. deep, drains NE.

14.00 Wide rolling rise, 10 ft. high, bears NE. and SW.


19.50 Swale, 10 ft. deep, drains N.60°E.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/4 sec. cor., with brass cap mkd.



raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. secs. 10, 11, 14, and 15, with brass cap mkd.



raise a mound of stone, 4 ft. base, 3 ft. high, W. of cor.

Land, nearly level with general northeasterly exposure and drainage.

Soil, light colored sand and clay, from 2 to 4 ft. deep, mixed with rock and gravel; 3rd rate.

Undergrowth, sagebrush, shadscale, yellowtop, Russian thistle, grass and weeds.

No timber.

Fair winter grazing land.

East, on a random line, bet. secs. 11 and 14.

40.00 Set temp. 1/4 sec. cor.

79.96 Intersect N. and S. line, at the cor. secs. 11, 12, 13, and 14.

Thence

West, on true line bet. secs. 11 and 14.

Over nearly level bottom of Wah Wah Valley, through medium dense undergrowth.

5.00 Swale, 10 ft. deep, drains NW.

SUBDIVISION OF T. 28 S., R. 14 W.

Chains

- 15.00 Swale, 10 ft. deep, drains N.30°W.
- 27.00 Wash, 2.10 chs. wide, 5 ft. deep, in bottom of wide draw, 20 ft. deep, drains NE.
- 32.50 Old road, bears N.30°E. and S.30°W.
- 39.98 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$\frac{1}{4}$ S11
 S14

1936

raise a mound

of stone, 3 ft. base, 2 ft. high, N. of cor.

- 42.10 Swale, 10 ft. deep, drains N.30°E.
- 42.20 Old road, bears N.20°E. and S.20°W.
- 79.96 The cor. secs. 10, 11, 14, and 15.

Land, nearly level, with general northeasterly exposure and drainage.

Soil, light colored sand and clay, from 2 to 4 ft. deep, mixed with rock and gravel; 3rd rate.

Undergrowth, sagebrush, shadscale, yellowtop, Russian thistle, grass and weeds.

No timber.

Fair winter grazing land.

N.0°05'E., bet. secs. 10 and 11.

Over nearly level bottom of Wah Wah Valley, through medium dense short undergrowth.

- 19.20 Old road, bears NE. and SW.
- 34.60 Old Salt Lake City to Pioche, Nevada, wagon road, bears N.55°E. and S.55°W.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$\frac{1}{4}$
 S10 | S11

1936

raise a mound


of stone, 3 ft. base, 2 ft. high, W. of cor.

- 53.80 Swale, 10 ft. deep, drains NE.
- 64.40 Old road, bears N.75°E. and S.75°W.
- 75.70 Old road, bears NW. and SE.

SUBDIVISION OF T. 28 S., R. 14 W.

Chains

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. secs. 2, 3, 10 and 11, with brass cap mkd.

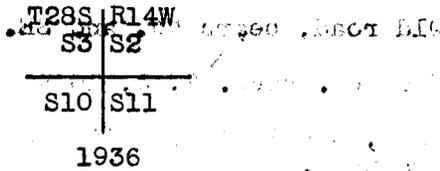

raise a mound of stone, 4 ft. base, 3 ft. high, W. of cor.

Land, nearly level, with general northeasterly exposure and drainage.

Soil, light colored sandy clay and sand from 2 to 4 ft. deep, mixed with rock and gravel; 3rd rate.

Undergrowth, sagebrush, shadscale, yellowtop, Russian thistle, grass and weeds.

No timber.

Fair winter grazing land.

East, on a random line, bet. secs. 2 and 11.

40.00 Set temp. 1/4 sec. cor.

79.98 Intersect N. and S. line, 3 lks. S. of cor. secs. 1, 2, 11, and 12.

Thence

S. 89°59'W., on true line bet. secs. 2 and 11.

Over nearly level bench land, through medium dense short undergrowth.


16.50 Old road, bears N.30°W. and S.30°E.

17.40 Junction of wash, 40 lks. wide, 4 ft. deep, drains from SW, with main wash, 80 lks. wide, 4 ft. deep, draining N. 30°W.

17.90 Old Salt Lake City to Pioche, Nevada, wagon road, bears NE. and S60°W.

30.60 Head of swale, 10 ft. deep, drains N.20°E.

39.99 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/4 sec. cor., with brass cap mkd.



raise a mound

of stone, 4 ft. base, 3 ft. high, N. of cor.

SUBDIVISION OF T. 28 S., R. 14 W.

Chains

51.40 Swale, 15 ft. deep, drains N.25°E.

59.30 Swale, 10 ft. deep, drains N.30°E.

62.40 Old road, bears NW. and SE.

79.98 The cor. secs. 2, 3, 10 and 11.

Land, nearly level with general northeasterly exposure and drainage.

Soil, light colored sand and clay, from 2 to 4 ft. deep, mixed with rock and gravel; 3rd rate.

Undergrowth, sagebrush, shadscale, yellowtop, Russian thistle, grass and weeds.

No timber.

Fair winter grazing land.


N.0°15'W., on true line bet. secs. 2 and 3.

Over nearly level bottom of Wah Wah Valley, through dense short undergrowth.

10.50 Road, bears NW. and SE.

39.00 Swale, 10 ft. deep, drains N.30°E.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.





raise a mound

of stone, 4 ft. base, 3 ft. high, W. of cor.

77.05 Intersect the S. bdy. of sec. 35, T. 27 S., R. 14 W., S. 89°52'E., 46 lks. dist. from the cor. of secs. 34 and 35, heretofore described.

At point of intersection.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for closing cor. secs. 2 and 3, T. 28 S., R. 14 W. with brass cap mkd.



1936

raise a mound

of stone, 4 ft. base; 3 ft. high; S. of cor.

SUBDIVISION OF T.28 S., R.14 W.

Chains

Land, nearly level, with general northerly exposure and drainage.

Soil, light colored sand and clay, from 2 to 4 ft. deep, mixed with rock and gravel; 3rd rate.

Undergrowth, sagebrush, shadscale, yellow top, Russian thistle, grass and weeds.

No timber.

Fair winter grazing land.

From the cor. secs. 33 and 34, on the S. bdy. of the tp., heretofore described.

N.0°04'E., bet. secs. 33 and 34.

Over nearly level bottom of Wah Wah Valley, through medium dense short undergrowth.

2.30 Swale, 10 ft. deep, drains N.60°E.


24.00 Swale, 10 ft. deep, drains N.60°E. about 15.00 chs. dist., thence N.

27.70 Dim road, bears N.5°E. and S.20°W.

37.80 Same road, bears north from S.5°E.; thence along road.

40.00 On W. edge of road.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked




of stone, 3 ft. base, 2 ft. high, W. of cor. raise a mound

60.00 Junction of road, from NW. with road bearing N. and S.

65.00 Same road as at the 37.80 ch. point, bears N.5°W. from the south.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. secs. 27, 28, 33 and 34, with brass cap marked



of stone, 4 ft. base, 3 ft. high, W. of cor. raise a mound

Land, rolling and broken, with general northeasterly exposure and drainage.

SUBDIVISION OF T.28 S., R.14 W.

| Chains | | ascend |
|--------|--|--------|
| | Soil, light colored sand and clay, from 2 to 4 ft. deep, with a rocky surface; 3rd rate. | |
| | Undergrowth, sagebrush, shadscale, yellow top, Russian thistle, grass and weeds. | |
| | Fair winter grazing land. | |
| | East, on a random line, bet. secs. 27 and 34. | |
| 40.00 | Set temp. $\frac{1}{4}$ sec. cor. | |
| 80.04 | Intersect N. and S. line, 5 lks. S. of the cor. secs. 26, 27, 34 and 35. | |
| | Thence | |
| | S.89°58'W., on true line bet. secs. 27 and 34. | |
| | Over rolling bottom of Wah Wah Valley, through medium dense short undergrowth. | |
| 36.00 | Base of low hill, bears NW. and SE.; asc. gradually over gentle NE. slope. | |
| 40.02 | On gentle NE. slope of hill. | |
| | Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground, to solid rock and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked | |
| | $\frac{1}{4} \frac{S 27}{S 34}$ 1936 | |
| | stone, 18x12x10 ins., at base of post, mkd. X. deposit a volcanic | |
| 49.00 | Top of ascent on N. slope of low hill, 50 ft. high, slopes N., about 10.00 chs. dist. to base, and bears S. about 20.00 chs. dist. to top; desc. gentle NW. slope. | |
| 57.00 | Base of hill, bears NE. and SW., thence over level bottom of Wah Wah Valley. | |
| 66.50 | Draw, 20 ft. deep, drains N. | |
| 80.04 | The cor. secs. 27, 28, 33 and 34. | |
| | Land, rolling with general northerly exposure and drainage | |
| | Soil, light colored sand and clay, from 2 to 4 ft. deep, mixed with rock and gravel; 3rd rate. | |
| | Undergrowth, sagebrush, yellow top, shadscale, Russian thistle, grass and weeds. | |
| | No timber. | |
| | Fair grazing land. | |

SUBDIVISION OF T. 28 S., R. 14 W.

Chains

N. 0°04'E., bet. secs. 27 and 28.

Over level bottom of Wah Wah Valley, through medium dense short undergrowth.


4.00 Road, bears N.5°E. and S.5°W.

26.00 Swale, 20 ft. deep, drains E.

32.00 Recross same road, bears N.20°W. and S.20°E.

36.60 Dim road, bears E. and W.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground, to solid rock, and in a mound of stone to top, for 1/4 sec. cor., with brass cap mkd.



deposit a volcanic


stone, 18x12x8 ins., at base of post, mkd. X.

50.00 Swale, 10 ft. deep, drains E.

60.00 Swale, 10 ft. deep, drains N.70°E.

67.50 Swale, 10 ft. deep, drains N.75°E.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. secs. 21, 22, 27, and 28, with brass cap mkd.



raise a mound

of stone, 4 ft. base, 3 ft. high, W. of cor.

Land, nearly level, with general northeasterly exposure and drainage.

Soil, light colored sand and clay, from 1 to 4 ft. deep, mixed with rock and gravel; 3rd rate.

Undergrowth, sagebrush, shadscale, yellowtop, Russian thistle, grass and weeds.

No timber.

Fair winter grazing land.

N.89°58'E., on a random line bet. secs. 22 and 27.

40.00 Set temp. 1/4 sec. cor.

80.04 Intersect N. and S. line, 3 lks. N. of the cor. secs. 22, 23, 36, and 27.

SUBDIVISION OF T. 28 S., R. 14 W.

Chains

| | |
|------|------|
| T28S | R14W |
| S16 | S15 |
| S21 | S22 |

1936

deposit a volcanic

stone, 10x10x10 ins., at base of post mkd. X.

Land, nearly level with general northeasterly exposure and drainage.

Soil, shallow light colored clay, from 1 to 2 ft. deep, mixed with rock and gravel; 3rd rate.

Undergrowth, sagebrush, shadscale, yellowtop, Russian thistle, grass and weeds.

No timber.

Fair winter grazing land.

N.89°59'E., on a random line bet. secs. 15 and 22.

40.00 Set temp. 1/4 sec. cor.

80.04 Intersect N. and S. line, 3 lks. S. of the cor. secs. 14, 15, 22, and 23.

Thence

S.89°58'W., on true line bet. secs. 15 and 22.

Over nearly level bottom of Wah.Wah Valley, through medium dense short undergrowth.

6.00 Swale, 25 ft. deep, drains NE.

40.02 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/4 sec. cor., with brass cap mkd.

| | |
|-----|------|
| 1/4 | S 15 |
| | S22 |

1936

deposit a volcanic

stone, 8x4x3 ins., at base of post, mkd. X.

80.04 The cor. secs, 15, 16, 21, and 22.

Land, nearly level, with general northeasterly exposure and drainage.

Soil, light colored sand and clay, from .2 to 4 ft. deep, mixed with rock and gravel; 3rd rate.

Undergrowth, sagebrush, yellowtop, shadscale, Russian thistle, grass and weeds.

No timber.

Fair winter grazing land.

SUBDIVISION OF T. 28 S., R. 14 W.

Chains

am1280


N.0°04'E., bet. secs. 15 and 16.

Over nearly level bottom of Wah Wah Valley, through medium dense short undergrowth.

7.60 Road, bears NE. and SW.

25.00 Small swale, drains N.30°E.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/4 sec. cor., with brass cap mkd.




raise a mound

of stone, 4 ft. base, 3 ft. high, W. of cor.

60.00 Old Salt Lake City to Pioche, Nevada, wagon road, bears N.60°E. and S.60°W.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. secs. 9, 10, 15, and 16, with brass cap mkd.



raise a mound

of stone, 4 ft. base, 3 ft. high, W. of cor.

Land, nearly level, with general northeasterly exposure and drainage.

Soil, light colored sand and clay, from 2 to 4 ft. deep, mixed with rock and gravel; 3rd rate.

Undergrowth, sagebrush, shadscale, yellowtop, Russian thistle, grass and weeds.

No timber.

Fair winter grazing land.

N.89°58'E., on a random line bet. secs. 10 and 15.

40.00 Set temp. 1/4 sec. cor.

80.04 Intersect N. and S. line, at the cor. secs. 10, 11, 14, and 15.

Thence

S.89°58'W., on true line bet. secs. 10 and 15.

Over nearly level bottom of Wah Wah Valley, through medium dense short undergrowth.

. SUBDIVISION OF T. 28 S., R. 14 W.

| Chains | |
|--------|--|
| 17.10 | Old road, bears NE. and SW. |
| 24.50 | Small swale, 10 ft. deep, drains NE. |
| 40.02 | Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd. |
| | $\frac{1}{4} \frac{S 10}{S 15}$ |
| | 1936 |
| | <p style="text-align: right;">raise a mound</p> <p>of stone, 3 ft. base, 2 ft. high, N. of cor.</p> |
| 51.20 | Old Salt Lake City to Pioche, Nevada, wagon road, bears N. 60°E. and S. 60°W. |
| 80.04 | The cor. secs. 9, 10, 15, and 16. |
| | Land, nearly level with general northeasterly exposure and drainage. |
| | Soil, light colored sand and clay, from 2 to 4 ft. deep, mixed with rock and gravel; 3rd rate. |
| | Undergrowth, sagebrush, shadscale, yellowtop, Russian thistle, grass and weeds. |
| | No timber. |
| | Fair winter grazing land. |
| | N. 0° 04' E., bet. secs. 9 and 10. |
| | Over nearly level bottom of Wah Wah Valley, through medium dense short undergrowth. |
| 40.00 | On rolling land, 55 ft. below sec. cor. |
| | Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd. |
| | $\frac{1}{4} \frac{S 9}{S 10}$ |
| | 1936 |
| | <p style="text-align: right;">raise a mound</p> <p>of stone, 3 ft. base, 2 ft. high, W. of cor.</p> |
| 42.00 | Wash, 20 lks. wide, 4 ft. deep, drains NE. |
| 49.00 | Road, bears N. 80°E. and S. 80°W. |
| 50.50 | Wash, 20 lks. wide, 2 ft. deep, drains NE. |
| 65.00 | Road, bears NE. and SW. |
| 80.00 | On rolling land, 50 ft. below $\frac{1}{4}$ sec. cor. |
| | Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. secs. 3, 4, 9, and 10, with brass cap mkd. |

SUBDIVISION OF T. 28 S., R. 14 W.

Chains

T28S, R14W
S4 | S3

—+—
S9 | S10

1936

raise a mound

of stone, 4 ft. base, 3 ft. high, W. of cor.

Land, nearly level, with general northeasterly exposure and drainage.

Soil, light colored sand and clay, from 2 to 4 ft. deep, mixed with rock and gravel; 3rd rate. Volcanic formation.

Undergrowth, sagebrush, shadscale, yellowtop, Russian thistle, grass and weeds.

No timber.

Fair winter grazing land.

N. 89° 58' E., on a random line bet. secs. 3 and 10.

40.00 Set temp. 1/4 sec. cor.

40.04 Intersect N. and S. line, at the cor. secs. 2, 3, 10, and 11.

thence

S. 89° 58' W., on true line bet. secs. 3, and 10.

Over nearly level bottom of Wah Wah Valley, through medium dense short undergrowth.

4.80 Road, bears NW. and SE.

40.02 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/4 sec. cor., with brass cap mkd.

1/4 —+—
S 3
—+—
S 10

1936

raise a mound

of stone, 3 ft. base, 2 ft. high, N. of cor.

59.00 Enter wide flood plain, drains N. 35° E.

69.00 Leave flood plain, drains N. 35° E.

70.50 Old road, bears NE. and SW.

80.04 The cor. secs. 3, 4, 9, and 10.

Land, nearly level, with general northeasterly exposure and drainage.

Soil, light colored sand and clay, from 2 to 4 ft. deep, mixed with rock and gravel; 3rd rate.

SUBDIVISION OF T. 28 S., R. 14 W.

Chains

Undergrowth, sagebrush, shadscale, yellowtop, Russian thistle, grass and weeds.

No timber.


Fair winter grazing land.

N.0°15'W. on true line bet. secs. 3 and 4.

Over nearly level bottom of Wah Wah Valley, through medium dense short undergrowth.

24.30 Head of wash, 5 lks. wide, 1 ft. deep, drains N.35°W.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/4 sec. cor., with brass cap mkd.



raise a mound


of stone, 4 ft. base, 3 ft. high, W. of cor.

75.20 Old road, bears NW. and SE.

77.34 Intersect the S. bdy. of sec. 34, T.27 S., R. 14 W., S.89° 51'E., 81 lks. dist. from the cor. secs. 33, and 34, heretofore described.

At point of intersection

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for closing cor. secs. 3 and 4, T. 28 S., R.14 W., with brass cap mkd.



1936

raise a mound

of stone, 3 ft. base, 2 ft. high, S. of cor.

Land, nearly level, with general northerly exposure and drainage.

Soil, light colored sand and clay, from 2 to 4 ft. deep, mixed with rock and gravel; 3rd rate.

Undergrowth, sagebrush; yellowtop, shadscale, Russian thistle, grass and weeds.

No timber.

Fair winter grazing land.

SUBDIVISION OF T. 28 N., R. 33 E., S. 34

Chains

From the cor. secs. 28, and 29, on the E. line of the T. heretofore described.

N.0°03'E., bet. secs. 32 and 33.

Over rolling mountainous land, through scattering timber and dense short undergrowth; desc. gradually over steep, rocky W. slope.

23.90 Wash, 20 lks. wide, 6 ft. deep, in bottom of draw, 265 ft. below sec. cor., drains N.20°E.; asc. gradually along E. slope.

40.00 On gradual E. slope, 265 ft. below sec. cor. Set an iron post, 3 ft. long, 1 in. diam., in the ground, for 1/2 sec. cor., with brass cap and.



raise a mound

of stone, 4 ft. base, 3 ft. high, W. of cor.


55.60 Spur, 20 ft. above 1/2 sec. cor., projects NE. about 5.00 chs. dist. to end.

67.80 Old road, bears NE. and SW.

71.00 Wash, 10 lks. wide, 1 ft. deep, in bottom of wide draw, 90 ft. below spur, drains NE.; asc. gradual rolling SE. slope.

80.00 On gradual SE. slope, 20 ft. above draw.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. secs. 28, 29, 32, and 33, with brass cap and.



raise a mound

of stone, 4 ft. base, 3 ft. high, W. of cor.

Land, rolling and mountainous, with general northeasterly exposure and drainage.

Soil, shallow, light colored clay, from 1 to 3 ft. deep, mixed with rock and gravel, lying on volcanic bedrock; 4th rate. Volcanic formation.

Undergrowth, sagebrush, shadescale, yellowtop, Russian thistle, grass and weeds.

Timber, juniper and piñon.

Fair winter grazing land.

SUBDIVISION OF T. 28 S., R. 14 W.

Chains

East, on a random line, bet. secs. 28 and 33.

40.00 Set temp. 1/4 sec. cor.

80.10 Intersect N. and S. line, 3 lks. N. of cor. secs. 27, 28, 33, and 34.

Thence

N.89°59'W., on true line bet. secs. 28 and 33.


Over rolling, hilly land, through medium dense short undergrowth.

2.30 Old road, bears NE. and SW.

15.00 Old road, bears NW. and SE.

40.05 On general NE. slope, 60 ft. above sec. cor.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/4 sec. cor., with brass cap mkd.



1936

raise a mound

of stone, 4 ft. base, 3 ft. high, N. of cor.

56.30 Swale, 10 ft. deep, drains NE.

66.00 Draw, 20 ft. below 1/4 sec. cor., drains N.60°E.

80.10 The cor. secs. 28, 29, 32 and 33.

Land, rolling and hilly, with general northeasterly exposure and drainage.

Soil, shallow, light colored clay, from 2 to 4 ft. deep, mixed with rock and gravel, lying on volcanic bedrock. 3rd rate. Volcanic formation.

Undergrowth, sagebrush, yellowtop, Russian thistle, grass and weeds.

No timber.

Fair winter grazing land.

N.0°03'E., bet. secs. 28 and 29.

Over rolling hilly land, through medium dense short undergrowth.

4.80 Spur, 20 ft. above sec. cor., projects S.70°E. about 4.00 chs. dist., thence N.10°E. about 10.00 chs. dist. to end; desc. gradual NE. slope.

23.80 Old road, bears NE. and SW.

29.60 Old road bears NE. and SW.

SUBDIVISION OF T. 28 S., R. 14 W.

Chains

- 29.70 Draw, 130 ft. below spur, drains NE.; asc. steep SE. slope
 - 40.00 On spur, 65 ft. above draw, projects NE.
- Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground, to solid rock, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap mkd.




deposit a volcanic

stone, 8x6x6 ins., at base of post, mkd. X.

Desc. steep NW. slope.

- 59.90 Leave hilly land, bears N.30°E. and S.30°W.; thence over gently rolling bottom of Wah Wah Valley.
- 64.80 Draw, 115 ft. below $\frac{1}{4}$ sec. cor., drains NE.
- 65.30 Road, bears NE. and SW.
- 73.00 Swale, 10 ft. deep, drains N.70°E.
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. secs. 20, 21, 28, and 29, with brass cap mkd.



raise a mound

of stone, 4 ft. base, 3 ft. high, W. of cor.

Land, rolling and hilly on S. 60.00 chs., balance of mile nearly level bottom of Wah Wah Valley, with general north-easterly exposure and drainage.

Soil, light colored sand and clay from 1 to 4 ft. deep, mixed with rock and gravel; 4th rate. Volcanic formation.

Undergrowth, sagebrush, yellowtop, shadscale, Russian thistle, grass and weeds.

No timber.

Fair winter grazing land.

S.89°59'E., on a random line bet. secs. 21 and 28.

- 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 - 80.06 Intersect N. and S. line, at the cor. secs. 21, 22, 27, and 28.
- Thence

SUBDIVISION OF T. 28 S., R. 14 W.

Chains

N. 89°59'W., on true line bet. secs. 21 and 28.

Over gently rolling bottom of Wah Wah Valley, through medium dense short undergrowth.

1.50 Dim. road, bears NE. and SW.

5.10 Low rolling rise, bears NE. and SW.

12.60 Swale, 10 ft. deep, drains NE.

19.10 Low rolling rise, bears NE. and SW.

29.90 Dim road; bears N.30°E. and S.30°W.

30.10 Draw, 40 ft. deep, drains NE.

40.05 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor.; with brass cap mkd.

| | |
|---------------|--|
| . | S 21 |
| $\frac{1}{4}$ | <hr style="width: 50px; margin: 0 auto;"/> |
| . | S 28 |

1936

raise a mound

of stone, 3 ft. base, 2 ft. high, N. of cor.; asc. gradual SE. slope.

53.10 Spur, 140 ft. above $\frac{1}{4}$ sec. cor., projects N.60°E. about 15.00 chs. dist. to end; desc. steep NW. slope.

70.10 Wash, 20 lks. wide, 4 ft. deep, in bottom of draw, 140 ft. below spur, drains NE.

70.50 Old road, bears NE. and SW.

80.06 The cor. secs. 20, 21, 28, and 29.

Land, gantly rolling, with general northeasterly exposure and drainage.

Soil, light colored sand, and clay, from 2 to 4 ft. deep, mixed with rock and gravel; 3rd rate.

Undergrowth, sagebrush, shadscale, yellowtop, Russian thistle, grass and weeds.

No timber.

Fair winter grazing land.

N.0°03'E., bet. secs. 20 and 21.

Over nearly level bottom of Wah Wah Valley, through medium dense short undergrowth.


40.00 On general NE. slope, 65 ft. below sec. cor.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.


SUBDIVISION OF T. 28 S., R. 14 W.

Chains

arland



- 55.00 Wash, 3.50 chs. wide, 2 ft. deep, in bottom of wide draw, 30 ft. deep, drains N.35°E.
- 60.00 Low spur, 25 ft. high, projects N.35°E.
- 62.00 Draw, 20 ft. deep, drains N.35°E.
- 68.80 Draw, 15 ft. deep, drains N.70°E., 3.00 chs. dist. to junction with last draw.
- 72.50 Dim road, bears S.60°E. and N.60°W.
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. secs. 16, 17, 20, and 21, with brass cap mkd.



raise a mound

of stone, 4 ft. base, 3 ft. high, W. of cor.

Land, gently rolling, with general northeasterly exposure and drainage.

Soil, light colored sand and clay, from 2 to 4 ft. deep, mixed with rock and gravel; 4th rate.

Undergrowth, sagebrush, shadscale, yellowtop, Russian thistle, grass and weeds.

No timber.

Fair winter grazing land.

- S.89°59'E., on a random line bet. secs. 16 and 21.
- 40.00 Set temp. 1/4 sec. cor.
- 80.08 Intersect N. and S. line, 3 lks. N. of the cor. secs. 15, 16, 21, and 22.
- Thence
- N.89°58'W., on true line bet. secs. 16 and 21.
- Over nearly level bottom of Wah Wah Valley, through medium dense short undergrowth.
- 6.80 Old road, bears NE. and SW.

SUBDIVISION OF T.28 S., R.14 W.

| Chains | |
|--------|--|
| 15.10 | Swale, 10 ft. deep, drains NE. |
| 40.04 | On general NE. slope, 45 ft. above sec. cor. |
| | Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked |
| | $\frac{1}{4} \frac{S 16}{S 21}$ 1936 |
| | raise a mound |
| | of stone, 4 ft. base, 3 ft. high, N. of cor. |
| 57.60 | Old road, bears N.30°E. and S.20°W. |
| 58.70 | The E. edge of wide draw, bears N.30°E. and S.30°W. |
| 60.70 | Wash, 70 lks. wide, 4 ft. deep, in bottom of wide draw, 30 ft. deep, drains N.30°E. |
| 65.00 | The W. edge of draw, bears N.30°E. and S.30°W. |
| 66.70 | Low rolling rise, bears S.30°W. and N.30°E. |
| 70.10 | Wash, 50 lks. wide, 3 ft. deep, in bottom of swale, 20 ft. deep, drains N.30°E. |
| 80.08 | The cor. secs. 16, 17, 20 and 21. |
| | Land, nearly level, with general northeasterly exposure and drainage. |
| | Soil, light colored sand and clay, from 2 to 4 ft. deep, mixed with rock and gravel; 3rd rate. |
| | Undergrowth, sagebrush, shadscale, yellow top, Russian thistle, grass and weeds. |
| | No timber. |
| | Fair winter grazing land. |
| | N.0°03'E., bet. secs. 16 and 17. |
| | Over nearly level bottom of Wah Wah Valley, through medium dense short undergrowth. |
| 1.10 | Old road, bears NE. and SW. |
| 5.60 | Old Salt Lake City to Pioche, Nevada, wagon road bears N.60°E. and S.60°W. |
| 24.50 | Swale, 10 ft. deep, drains N.60°E. |
| 28.40 | Old road, bears NE. and SW. |
| 33.70 | Old road, bears NE. and SW. |
| 40.00 | Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd. |

SUBDIVISION OF T.28 S., R.14 W.

Chains

51.60 Wash, 80 lks. wide, 3 ft. deep, drains NE.
 53.80 Wash, 60 lks. wide, 3 ft. deep, drains NE.
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. secs. 8, 9, 16 and 17, with brass cap mkd.

| | |
|------|------|
| T28S | R14W |
| S 8 | S 9 |
| S 17 | S 16 |
| 1936 | |

 of stone, 4 ft. base, 3 ft. high, W. of cor. raise a mound
 Land, nearly level, with general northeasterly exposure and drainage.
 Soil, light colored sand and clay, from 2 to 4 ft. deep, mixed with rock and gravel; 3rd rate. Volcanic formation
 Undergrowth, sagebrush, shadscale, yellow top, Russian thistle, grass and weeds.
 No timber.
 Fair winter grazing land.

 S.89°58'E., on a random line bet. secs. 9 and 16.
 40.00 Set temp. 1/4 sec. cor.
 80.10 Intersect N. and S. line, at the cor. secs. 9, 10, 15 and 16.
 Thence
 N.89°58'W., on true line bet. secs. 9 and 16.
 Over nearly level bottom of Wah Wah Valley, through medium dense short undergrowth.
 20.10 Bottom of wide draw, 20 ft. deep, drains N.20°E.
 23.20 Wash, 40 lks. wide, 3 ft. deep, in W. edge of wide draw, drains N.30°E.
 40.05 In swale, drains NE.
 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/4 sec. cor., with brass cap mkd.

| |
|------|
| S. 9 |
| S 16 |
| 1936 |

SUBDIVISION OF T. 28 S., R. 14 W.

Chains

Bottom of

raise mound

of stone, 3 ft. base, 2 ft. high, N. of cor.

42.70 Old road, bears NE. and SW.

54.40 Wash, 40 lks. wide, 5 ft. deep, drains N.

57.50 Wash, 80 lks. wide, 5 ft. deep, drains N.35°E.

64.70 Old road, bears N. and S.

80.10 The cor. secs. 8, 9, 16, and 17.

Land, nearly level, with general northeasterly exposure and drainage.

Soil, light colored sand and clay, from 2 to 4 ft. deep, mixed with rock and gravel; 3rd rate.

Undergrowth, sagebrush, shadscale, yellowtop, Russian thistle, grass and weeds.

No timber.

Fair winter grazing land.

N.0°03'E., bet. secs. 8 and 9.


Over nearly level bottom of Wah Wah Valley, through medium dense short undergrowth.

8.10 Head of swale, 5 ft. deep, drains N.30°E.

24.00 Wash, 20 lks. wide, 1 ft. deep, drains NW.

33.10 Old road, bears N.60°E. and S.60°W.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/4 sec. cor., with brass cap mkd.




raise a mound

of stone, 3 ft. base, 2 ft. high, W. of cor.

56.90 Swale, 10 ft. deep, drains N.10°E.

63.60 Old road, bears E. and SW.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. 4, 5, 8, and 9, with brass cap mkd.



SUBDIVISION OF T. 28 S., R. 14 W.

Chains

exists

raise a mound

of stone, 4 ft. base, 3 ft. high, W. of cor.

Land, nearly level with general northeasterly exposure and drainage.

Soil, light colored sand and clay, from 2 to 4 ft. deep, mixed with rock and gravel; 3rd rate.

Undergrowth, sagebrush, yellowtop, Russian thistle; grass and weeds.

No timber.

Fair winter grazing land.

S. 89°58'E., on a random line, bet. secs. 4 and 9.

40.00 Set temp. 1/4 sec. cor.

80.08 Intersect N. and S. line, 3 lks. S. of the cor. secs. 3, 4, 9, and 10.

Thence

N. 89°59'W., on true line bet. secs. 4 and 9.

Over nearly level bottom of Wah Wah Valley, through dense undergrowth.

10.10 Wash, 15 lks. wide, 4 ft. deep, drains N. 10°E.

22.80 Wash, 60 lks. wide, 4 ft. deep, drains N. 30°E.

40.04 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/4 sec. cor., with brass cap mkd.

1/4 S 4 / S 9

1936

raise a mound

of stone, 3 ft. base, 2 ft. high, N. of cor.

75.80 Old road, bears N. 20°W. and S. 10°E.

79.80 Swale, 10 ft. deep, drains NW.

30.08 The cor. secs. 4, 5, 8, and 9.

Land, nearly level, with general northeasterly exposure and drainage.

Soil, light colored sand and clay, from 2 to 4 ft. deep, mixed with rock and gravel; 3rd rate.

Undergrowth, Russian thistle, sagebrush, yellowtop, grass and weeds.

No timber.

Fair winter grazing land.

SUBDIVISION OF T. 28 S., R. 14 W.


Chains

N.0°16'W., on true line, bet. secs. 4 and 5.

Over nearly level bottom of Wah Wah Valley, through dense short undergrowth.

- .80 Swale, 10 ft. deep, drains NW.
- 19.30 Swale, 10 ft. deep, drains N.30°E.
- 33.00 Wide swale, 10 ft. deep, drains N.; thence along swale.
- 37.70 Old road, bears N.30°W. and S.30°E.; continue along swale.
- 40.00 On bottom of swale, 45 ft. below sec. cor.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.




raise a mound

of stone, 4 ft. base, 3 ft. high, W. of cor.

- 45.00 Leave swale, 10 ft. deep, drains N.30°E..
- 62.50 Old road, bears NE. and SW.
- 77.54 Intersect the S. bdy. of sec. 33, T. 27 S., R. 14 W., S. 89°47'E., 94 lks. dist. from the cor. secs. 32 and 33, heretofore described.

At point of intersection.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for closing cor. secs. 4 and 5, T. 28 S., R. 14 W., with brass cap mkd.



raise a mound

of stone, 4 ft. base, 3 ft. high, S. of cor.

Land, nearly level with general northerly exposure and drainage.

Soil, light colored sand and clay, from 2 to 4 ft. deep, mixed with rock and gravel; 3rd rate.

Undergrowth, Russian thistle, sagebrush, yellowtop, grass and weeds.

No timber.

Fair winter grazing land.

SUBDIVISION OF T. 28 S., R. 14 W.

Chains

chains

From the cor. secs. 31 and 32, on the S. ldy. of the tp., heretofore described.

N. 0° 03' E., bet. secs. 31 and 32.

Over rolling mountainous land, through medium dense timber and short undergrowth; desc. steep NW. slope.

40.00 On steep NW. slope, 480 ft. below sec. cor.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/4 sec. cor., with brass cap mkd.

S31 | S32

1936

from which

A pinon, 5 ins. diam., bears N. 1° 45' E., 158 lks. dist mkd. 1/4 S 32 B T.

A juniper, 6 ins. diam., bears N. 25° W., 110 lks. dist mkd. 1/4 S 31 B T.

Continue steep descent over NW. slope.

51.50 Old road, at base of steep descent, bears NE. and SW.

61.10 The SE. rim of large draw, bears NE. and SW.; desc. steep NW. slope.

71.00 Wash, 1.00 chs. wide, 5 ft. deep, in bottom of large draw, 80 ft. deep, drains NE.; asc. steep SE. slope.

80.00 On steep SE. slope, 75 ft. above wash.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. secs. 29, 30, 31, and 32, with brass cap mkd.

T28S | R14W

S30 | S29

S31 | S32

1936

from which

A juniper, 14 ins. diam., bears S. 80° W., 90 lks. dist. mkd. T 28 S R 14 W S 31 B T.

No other bearing trees available.

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Land, rolling and mountainous, with general northeasterly exposure and drainage.

Soil, shallow light colored sand, and clay, from 1 to 2 ft. deep, mixed with rock and gravel; 4th rate. Volcanic formation

Undergrowth, sagebrush, yellowtop, shadscale, Russian thistle, grass and weeds.

No timber.

Fair winter grazing land.

SUBDIVISION OF T. 28 S., R. 14 W.

Chains

East, on a random line bet. 29 and 32.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

79.92 Intersect N. and S. line, 7 lks. S. of the cor. secs. 28, 29, 32, and 33.

Thence


S.89°57'W., on true line, bet. secs. 29 and 32.

Over rolling, mountainous land, through dense short undergrowth; asc. gradual SE. slope.

9.90 Spur, 60 ft. above sec. cor., projects NE., about 15.00 chs. dist. to end; desc. NW. slope.

39.96 On gradual NW. slope, 75 ft. below spur.

Set an iron post, 3 ft. long, 1 in. diam., 15 ins. in the ground, to solid rock, and in a mound to top, for $\frac{1}{4}$ sec. cor. with brass cap mkd.



deposit a volcanic

stone, 10x8x8 ins. at base of post, mkd. X.

54.90 Old road, bears NE. and SW.; enter scattering timber, bears with road.

70.90 The SE. rim of large draw, bears NE. and SW; desc. steep NW. slope.

76.70 Wash, 1.00 chs. wide, 5 ft. deep, in bottom of large draw, 80 ft. deep, drains NE.; asc. steep SE. slope.

79.92 The cor. sets. 29, 30, 31, and 32, 75 ft. above draw.

Land, rolling and mountainous, with general northeasterly exposure and drainage.

Soil, light colored sand and clay, from 1 to 2 ft. deep, with a rocky surface; 3rd rate. Volcanic formation.

Undergrowth, sagebrush, yellowtop, shadscale, Russian thistle, grass and weeds.

Timber, a few scrub juniper on W. portion of mile.

Fair winter grazing land.

West, on a random line, bet. secs. 30 and 31.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

78.01 Intersect W. bdy. of tp., 26 lks. N. of the cor. secs. 25, 30, 31, and 36, heretofore described.

Thence

SUBDIVISION OF T. 28 S., R. 14 W.

Chains

38.84

N.89°49'E., on true line, bet. secs. 30 and 31.

Over rolling, hilly land, through scattering timber and dense short undergrowth.

4.30 Spur, 30 ft. above sec. cor., projects S.30°E. about 12.00 chs. dist. to end; desc. along S. slope.

11.70 Draw, 60 ft. below spur, drains S.30°E.

31.60 Draw, 100 ft. below spur, drains S. about 5.00 chs. dist. to junction with draw draining N.75°E; asc. gradual W. slope.

38.01 On low spur, 60 ft. above last draw, projects S. 01. Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground to solid rock, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$\frac{1}{4}$ $\frac{S\ 30}{S\ 31}$

1936

from which

A juniper, 12 ins. diam., bears S.85°E., 40 lks. dist mkd. $\frac{1}{4}$ S 31 B T.

No other bearing trees available.

Deposit a volcanic stone, 10x8x8 ins. at base of post, mkd. X.

Desc. east slope.

58.70 Draw, 80 ft. below $\frac{1}{4}$ sec. cor., drains NE.; asc. NW. slope.

73.00 Spur, 50 ft. above draw, projects N.20°E.

77.00 The NW. rim of large draw, bears NE. and SW.

78.01 The cor. secs. 29, 30, 31, and 32, 80 ft. below spur.

Land, rolling and hilly, with general southeasterly exposure and drainage.

Soil, shallow, light colored clay, from 1 to 2 ft. deep, mixed with rock and gravel; lying on volcanic bedrock; 4th rate. Volcanic and sandstone formation.

Undergrowth, sagebrush, shadscale, yellowtop, Russian thistle, grass and weeds.

Timber, juniper and pihon.

Fair winter grazing land.

N.0°03'E., bet. secs. 29 and 30.

Over rolling hills, through scattering timber and dense short undergrowth; asc. SE. slope.

2.00 The NW. rim of large draw, bears NE. and SW.

SUBDIVISION OF T. 28 S., R. 14 W.

Chains

11.00 Spur, 15 ft. above sec. cor., projects N.30°E., about 15.00 chs. dist. to end.

21.02 Draw, 50 ft. deep, drains NE.; leave timber bears NE. and SW: asc. broken SE. slope.

40.00 On spur, 110 ft. above draw, projects NE.

Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground, to solid rock, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

| | |
|-----|-----|
| S30 | S29 |
|-----|-----|

1936

deposit a volcanic

stone, 10x10x10 ins. at base of iron post, mkd. X.

Desc. NW. slope.

52.00 Bend in draw, 85 ft. below $\frac{1}{4}$ sec. cor., heads S.20°E. about 5.00 chs. dist., drains NE; asc. gradual SE. slope.

61.30 Spur, 70 ft. above draw, projects NE.; desc. steep NW. slope.

75.80 Draw, 80 ft. below spur, drains NE.; asc. gradual SE. slope.

80.00 On gradual SE. slope, 50 ft. above draw.

Set an iron post, 3 ft. long, 2 ins. diam., 12 ins. in the ground, to solid rock, and in a mound of stone to top, for cor. secs. 19, 20, 29, and 30, with brass cap mkd.

| | |
|------|------|
| T28S | R14W |
| S19 | S20 |
| S30 | S29 |

1936

deposit a volcanic

stone 10x10x8 ins., at base of post, mkd. X.

Land, rolling and hilly, with general northeasterly exposure and drainage.

Soil, shallow, light colored sand and clay, from 1 to 2 ft. deep, mixed with rock and gravel; 4th rate. Volcanic formation.

Undergrowth, sagebrush, shadscale, yellowtop, Russian thistle, grass and weeds.

Timber, juniper and pinon.

Fair winter grazing land.

N.89°57'E., on a random line, bet. secs. 20 and 29.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

SUBDIVISION OF T. 28 S., R. 14 W.

Chains

series 0

79.94 Intersect N. and S. line; 7 lks. N. of the cor. secs. 120, 21, 28, and 29.

Thence

West, on true line, bet. secs. 20 and 29.

Over gently rolling land, through dense short undergrowth.

25.40 The SE. rim of large draw; bears NE. and SW.; desc. NW. slope.

29.50 Wash, 1.00 chs. wide, 5 ft. deep, in bottom of large draw, 60 ft. deep, drains NE.; asc. SE. slope.

36.30 The NW. rim of large draw, bears NE. and SW.

39.97 Set an iron post, 3 ft. long, 1 in. diam., 16 ins. in the ground, to solid rock, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$\frac{1}{4}$ S 20
 S 29
 1936

deposit a volcanic

stone, 10x8x8 ins., alongside iron post, mkd. X.

59.90 Spur, 20 ft. above $\frac{1}{4}$ sec. cor., slopes N., 3.00 chs. dist. to end.

70.90 Draw, 40 ft. below spur, drains NE.

79.94 The cor. secs. 19, 20, 29, and 30.

Land, gently rolling, with general northeasterly exposure and drainage.

Soil, shallow light colored clay, from 1 to 2 ft. deep, mixed with rock and gravel, lying on volcanic bedrock; 4th rate. Volcanic formation.

Undergrowth, sagebrush, shadscale, yellowtop, Russian thistle, grass and weeds.

No timber.

Fair winter grazing land.

S. 89°49'W., on a random line, bet. secs. 19 and 30.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

77.83 Intersect the W. bdy. of the tp., 12 lks. S. of cor. secs. 19, 24, 25, and 30, heretofore described.

Thence

N. 89°54'E., on true line, bet. secs. 19 and 30.

Over rolling hills, through dense short undergrowth; desc. gradual SE. slope.

SUBDIVISION OF T. 28 S., R. 14 W.

Chains

- 5.00 Draw, 20 ft. below sec. cor. drains N.60°E; asc. steep NW. slope.
- 20.80 Spur, 60 ft. above draw, projects N.75°E.; desc. SE. slope.
- 37.83 On gradual SE. slope, 150 ft. below spur.

Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground, to solid rock, and in a mound of stone to top, for ¼ sec. cor.; with brass cap mkd.

S 19

S 30

1936

deposit a volcanic

stone, 10x10x8 ins., at base of post, mkd. X.

- 49.00 Old road, bears NE. and SW.
- 53.80 Draw, 25 ft. below ¼ sec. cor., drains NE.; asc. steep NW. slope.
- 67.80 Spur, 40 ft. above draw, projects NE.; desc. gradual SE. slope.
- 77.83 The cor. secs. 19, 20, 29, and 30.

Land, rolling and hilly, with general northeasterly exposure and drainage.

Soil, shallow light colored clay, from 1 to 2 ft. deep, mixed with rock and gravel, lying on volcanic bedrock; 4th rate. Volcanic formation.

Undergrowth, sagebrush, shadscale, yellowtop, Russian thistle, grass and weeds.

No timber.

Fair winter grazing land.

N.0°03'E., bet. secs. 19 and 20.

Over rolling mountainous land, through dense short undergrowth; asc. gradual SE. slope.

- 7.75 Spur, 40 ft. above sec. cor., projects NE.; desc. gradual NW. slope.
- 17.00 Base of mountainous land, bears NE. and SW.; thence over rolling bottom of Wah Wah Valley.
- 28.00 Old Salt Lake City to Pioche, Nevada, wagon road, bears NE. and SW.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for ¼ sec. cor., with brass cap mkd.

S 19 | S 20

1936

SUBDIVISION OF T. 28 S., R. 14 W.

Chains

aniam

raise a mound

of stone, 4 ft. base, 3 ft. high, W. of cor.

48.50 Wash, 1.00 ch. wide, 10 ft. deep, drains NE.

64.30 Wash, 15 lks. wide, 3 ft. deep, drains N.60°E.

75.50 Draw, 30 ft. deep, drains E., about 7.00 chs. dist., thence NE; base of rolling hills, bears NE. and SW; asc. gentle rocky SE. slope.

80.00 On gentle, rocky SE. slope, 25 ft. above draw.

Set an iron post, 3 ft. long, 2 ins. diam., 12 ins. in the ground, to solid rock, and in a mound of stone to top, for cor. secs. 17, 18, 19, and 20, with brass cap mkd.

T28S | R14W
S18 | S17

S19 | S20

1936

deposit a volcanic

stone, 10x8x8 ins., at base of post, mkd. X.

Land, S. 17.00 chs. is rolling and mountainous; balance of mile is gently rolling, with general northeasterly exposure and drainage.

Soil, shallow, light colored clay, from 1 to 2 ft. deep, mixed with rock and gravel; 3rd rate. Volcanic formation.

Undergrowth, sagebrush, shadscale, yellowtop, Russian thistle, grass and weeds.

No timber.

Fair winter grazing land.

East, on a random line bet. secs. 17 and 20.

40.00 Set temp. 1/4 sec. cor.

79.94 Intersect N. and S. line, 3 lks. S. of the cor. secs. 16, 17, 20, and 21.

thence

S.89°59'W., on true line bet. secs. 17 and 20.

Over nearly level bottom of Wah Wah Valley, through dense short undergrowth.

1.30 Dim road, bears NE. and SW.

6.40 Old Salt Lake City to Pioche, Nevada, wagon road, bears NE. and SW.

28.90 Old road, bears NE. and SW.

32.30 Dim road, bears NE. and SW.

SUBDIVISION OF T. 28 S., R. 14 W.

Chains

35.80 Dim. road, bears NW. and SE.

39.97 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

S 17

S 20

1936

raise a mound

of stone, 4 ft. base, 3 ft. high, N. of cor.

41.60 Wash, 1.00 chs. wide, 5 ft. deep, drains NE.

69.90 Base of mountainous land, bears NE. and SW.

79.94 The cor. secs. 17, 18, 19, and 20.

Land, rolling, with general northeasterly exposure and drainage.

Soil, light colored sandy clay loam, from 2 to 4 ft. deep, mixed with rock and gravel; 3rd rate.

Undergrowth, sagebrush, shadscale, yellowtop, Russian thistle, grass and weeds.

No timber.

Fair winter grazing land.

S. 89°54'W., on a random line bet. secs. 18 and 19.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

77.70 Intersect W. bdy. of the tp., 12 lks. S. of the cor. secs. 13, 18, 19, and 24, heretofore described.

Thence

N. 89°59'E., on true line bet. secs. 18 and 19,

Over rolling mountainous land, through dense short undergrowth; desc. gradual SW. slope.

16.60 Draw, 85 ft. below sec. cor., drains NE.; asc. steep NW. slope.

22.70 Spur, 130 above draw, projects NE.; desc. steep SE. slope.

37.70 On gradual N. slope, 35 ft. below spur.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

S 18

S 19

1936

raise a mound

SUBDIVISION OF T. 28 S., R. 14 W.

Chains

chains

of stone, 4 ft. base, 3 ft. high, N. of cor.

Desc. gentle N. slope.

47.70 Spur, 10 ft. below 1/4 sec. cor., projects NE.; desc. gradual SE. slope.

77.70 The cor. secs. 17, 18, 19, and 20.

Land, rolling, and mountainous, with general northeasterly exposure and drainage.

Soil, light colored sand and clay, from 2 to 4 ft. deep, mixed with rock and gravel, lying on volcanic bedrock; 4th rate. Volcanic formation.

Undergrowth, sagebrush, shadscale, yellowtop, Russian thistle, grass and weeds.

No timber.

Fair winter grazing land.

N.0°03'E., bet. secs. 17 and 18.

Over rolling mountainous land, through dense short undergrowth; asc. gradual SE. slope.


10.00 Head of draw, 10 ft. deep, drains NE.; asc. SE. slope.

20.00 Spur, 25 ft. above head of draw, projects NE.; desc. steep NW. slope.

28.00 Leave mountainous land, bears NE. and SW.; thence continue over nearly level bottom of Wah Wah Valley.

29.00 Wash, 1.00 chs. wide, 5 ft. deep, 80 ft. below spur, drains NE.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/4 sec. cor, with brass cap mkd.




raise a mound

of stone, 3 ft. base, 2 ft. high, W. of cor.

80.00 In dim road, bears S.30°E. and N.60°W., near E. bank of wash, draining N.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. secs. 7, 8, 17, and 18, with brass cap mkd.



SUBDIVISION OF T. 28 S., R. 14 W.

Chains

... raise a mound of stone, 4 ft. base, 3 ft. high, W. of cor.

Land, S. 28.00 chs. is rolling and mountainous, balance of mile is nearly level, with general northeasterly exposure and drainage.

Soil, light colored sand and clay, from 1 to 4 ft. deep, mixed with rock and gravel; 3rd rate. Volcanic formation.

Undergrowth, sagebrush, yellowtop, shadscale, Russian thistle, grass and weeds.

No timber.

Fair winter grazing land.

N. 89°59'E., on a random line bet. secs. 8 and 17.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

79.94 Intersect N. and S. line, at the cor. secs. 8, 9, 16, and 17.

hence

S. 89°59'W., on true line bet. secs. 8 and 17.

Over nearly level bottom of Wah Wah Valley, through dense short undergrowth.

17.60 Wash, 10 lks. wide, 2 ft. deep, drains N. 35°E.

37.60 Wash, 40 lks. wide, 10 ft. deep, drains N. 30°E.

39.97 Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground, to solid rock, and in a mound of stone, to top, for $\frac{1}{4}$ sec. cor, with brass cap mkd.

S 8.

 $\frac{1}{4}$
S17
1936

... deposit a volcanic stone, 12x12x10 ins., at base of post, mkd. X.

79.94 The cor. secs. 7, 8, 17, and 18.

Land, nearly level, with general northeasterly exposure and drainage.

Soil, light colored sand and clay, from 1 to 4 ft. deep, mixed with rock and gravel; 3rd rate.

Undergrowth, sagebrush, yellowtop, shadscale, Russian thistle, grass and weeds.

No timber.

Fair winter grazing land.

SUBDIVISION OF T. 28 S., R. 14 W.

Chains

enlaid

S. 89°59'W., on true line, bet. secs. 7 and 18.

Over rolling mountainous land, through dense short undergrowth.

.20 Wash, 20 lks. wide, 4 ft. deep, drains N., about 9.00 chs. dist., thence NE.; base of mountainous land, bears NW. and SE.; asc. gradual NE. slope.

10.00 Spur, slopes N. about 6.00 chs. dist. to base; thence asc. gradually along N. slope.

27.00 Spur, 100 ft. above sec. cor., slopes N. 20°W. about 6.00 chs. dist. to end; desc. steep rocky W. slope.

30.90 Wash, 30 lks. wide, 6 ft. deep, at base of spur, drains N. about 15.00 chs. dist.; thence N. 85°E.; asc. steep NE. slope.

40.00 On steep NE. slope, 90 ft. above wash.

Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground, to solid rock, and in a mound of stone to top, for 1/4 sec. cor., with brass cap mkd.

S 7
1/4 ---
S18
1936

deposit a volcanic

stone, 10x8x8 ins., at base of post, mkd. X.

50.00 Spur, 40 ft. above 1/4 sec. cor, slopes N. about 10.00 chs. dist. to end; desc. gradual NW. slope.

68.20 Wash, 1.00 chs. wide, .5 ft. deep, drains N. 20°E.; asc. gradually over nearly level bench land.

69.60 Old road, bears N. 75°E. and SW.

79.38 Intersect the E. bdy. of sec. 12, T. 28 S., R. 15 W., N. 0° 19'W., 1.70 chs. dist., from the cor. of secs. 12, and 13, heretofore described.

At point of intersection.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for closing cor. secs. 7 and 18, T. 28 S., R. 14 W. with brass cap mkd.

T28S T28S
R15W S7 . CC.
S12 S18
R14W
1936

raise a mound

of stone, 4 ft. base, 3 ft. high, E. of cor.

Land, rolling and mountainous, with general northeasterly exposure and drainage.

Soil, shallow light colored clay, from 1 to 4 ft. deep, mixed with rock and gravel; 4th rate. Volcanic formation.

SUBDIVISION OF T. 28 S., R. 14 W.

Chains

Undergrowth, sagebrush, yellowtop, shadscale, Russian thistle, grass and weeds.

No timber.


Fair winter grazing land.

N.0°03'E., bet. secs. 7 and 8.

Over nearly level bottom of Wah Wah Valley, through dense short undergrowth.

9.00 Junction of wash, 30 lks. wide, 4 ft. deep, drains NE., from W. and S.5°W.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.




raise a mound

of stone, 3 ft. base, 2 ft. high, W. of cor.

65.60 Old road, bears NE. and SW.

80.00 In dim road, bearing N.75°W. and S.75°E.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. secs. 5, 6, 7, and 8, with brass cap mkd.



raise a mound

of stone, 4 ft. base, 3 ft. high, W. of cor.

Land, nearly level, with general northeasterly exposure and drainage.

Soil, light colored sand and clay, from 2 to 4 ft. deep, mixed with rock and gravel; 3rd rate.

Undergrowth, sagebrush, shadscale, yellowtop, Russian thistle, grass and weeds.

No timber.

Fair winter grazing land.

N.89°59'E., on a random line bet. secs. 5 and 8.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

SUBDIVISION OF T. 28 S., R. 14 W.

Chains

BR1470

79.94 Intersect N. and S. line, 3 lks. N. of the cor. secs. 4, 5, 8, and 9.

Thence

West, on true line, bet. secs. 5 and 8.

Over nearly level bottom of Wah Wah Valley, through dense short undergrowth.

15.50 Wash, 1.00 ch. wide, 10 ft. deep, drains N.60°E. from S. 30°W.

39.97 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/4 sec. cor., with brass cap mkd.

1/4 S 5
S 8

1936

raise a mound

of stone, 3 ft. base, 2 ft. high, N. of cor.

65.40 Wash, 10 lks. wide, 2 ft. deep, in bottom of shallow swale, drains NE.

65.70 Old road, bears NE. and SW.

79.94 The cor. sets. 5, 6, 7, and 8.

Land, nearly level, with general northeasterly exposure and drainage.

Soil, light colored sand and clay, from 2 to 4 ft. deep, mixed with rock and gravel; 3rd rate.

Undergrowth, sagebrush, yellowtop, shadscale, Russian thistle, grass and weeds.

No timber.

Fair winter grazing land.

S.89°59'W., on true line bet. secs. 6 and 7.

Over nearly level bottom of Wah Wah Valley, through dense short undergrowth.

34.20 Wash, 2.00 chs. wide, 4 ft. deep, drains N.10°E.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/4 sec. cor., with brass cap mkd.

S 6
1/4 S 7

1936

raise a mound

of stone, 3 ft. base, 2 ft. high, N. of cor.

42.50 Road, bears N.20°W. and S.20°E.

SUBDIVISION OF T. 28 S., R. 14 W.

Chains

45.00 Base of mountainous land, bears NE. and SW; asc. steep rocky E. slope.

53.40 Spur, 150 ft. above 1/4 sec. cor., slopes N. about 10.00 chs. dist. to end; asc. gradually along NE. slope.


73.00 Spur, 130 ft. above last spur, slopes N. about 12.00 chs. dist. to end; desc. steep rocky NW. slope.

79.78 On steep rocky NW. slope, 70 ft. below spur.

Intersect the E. bdy. of sec. 1, T. 28 S., R. 15 W., N.0° 19'W., 2.50 chs. dist., from the cor. of secs. 1 and 12, heretofore described.

At point of intersection.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for closing cor. secs. 6 and 7, T. 28 S., R. 14 W. with brass cap mkd.

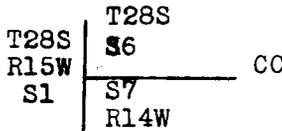

1936

raise a mound

of stone, 4 ft. base, 3 ft. high, E. of cor.

Land, E. 45.00 chs. is nearly level, balance of mile is rolling and mountainous, with general northeasterly exposure and drainage.

Soil, light colored sand and clay, from 2 to 4 ft. deep, mixed with rock and gravel; 3rd rate. Volcanic formation.

Undergrowth, sagebrush, shadscale, yellowtop, Russian thistle, grass and weeds.


No timber.

Fair winter grazing land.

N.0°17'W.; on true line bet. secs. 5 and 6.

Over nearly level bottom of Wah Wah Valley, through dense short undergrowth.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground, to solid rock, and in a mound of stone to top, for 1/4 sec. cor., with brass cap mkd.



deposit a volcanic

stone, 8x6x4 ins., at base of post, mkd. X.

SUBDIVISION OF T. 28 S., R. 14 W.

Chains

entire

- 57.90 Swale, 3 ft. deep, drains NE.
- 61.90 Wash, 1.00 ch. wide, 2 ft. deep, drains NE.
- 70.60 Swale, 6 ft. deep, drains N.30°E.
- 77.73 Intersect the S. bdy. of sec. 32, T.27 S., R. 14 W., S. 89° 52'E., 1.07 chs. dist. from the cor. of secs. 31 and 32, heretofore described.

At the point of intersection.

Set an iron post, 3 ft. long, 2 ins. diam., .27 ins. in the ground, for closing cor. secs. 5 and 6, T. 28 S., R. 14 W. with brass cap mkd.

T27S R14W
S32

| | |
|------|------|
| S6 | S5. |
| T28S | R14W |
| CC | |

1936

raise a mound

of stone, $3\frac{1}{2}$ ft. base, $2\frac{1}{2}$ ft. high, S. of cor.

Land, nearly level, with general northeasterly exposure and drainage.

Soil, light colored sand and clay, from 2 to 4 ft. deep, mixed with rock and gravel; 3rd rate.

Undergrowth, sagebrush, shadscale, yellowtop, Russian thistle, grass and weeds.

No timber.

Fair winter grazing land.

GENERAL DESCRIPTION

The land embraced in T.28S., R. 14 W., is desert in character, consisting of rolling mountainous land in the extreme southwestern and western portions, and nearly level land throughout the balance of the tp., which is situated in the southern portion of Wahi Wah Valley.

The elevation above sea level ranges from about 5,000 ft. in the valley bottom to about 5,600 ft. in the extreme west and southwest portions. The general drainage of the tp. is northwesterly in the extreme eastern portion of the tp., and northeasterly in the remainder of the tp. The soil in the valley or lower lands in the north, east, and central portion of the tp. is a light colored sand and clay, from 2 to 4 ft. deep, mixed with rock and gravel, lying on a heavy clay subsoil and may be classed as 3rd rate. This soil, while it supports a medium dense growth of shadscale, sagebrush, yellowtop, Russian thistle, grass and weeds, is not suitable for cultivation by reason of its rocky character and the surface being broken by many washes and draw

GENERAL DESCRIPTION, T. 28 S., R. 14 W.

The soil of the west and southwest portion, is a shallow light colored clay, from 1 to 2 ft. deep, mixed with rock and gravel, with a rock surface, lying on volcanic bedrock and may be classed as 4th rate. A scattering growth of short sagebrush, shadscale, yellowtop, grass and weeds, with scattering scrub juniper and pinon timber, which has no commercial value, except for fuel, is found on the mountainous portion of the tp.

No water was found in the tp. At the time of this survey, no settlers were located in the tp., and no improvements were found.

In general, the tp. is suited for the grazing of sheep and cattle during the winter and early spring months, or in the season when snow is available for watering purposes.

No indications of mineral, coal, oil, or oil shale were observed in the tp.

An old ungraded road, between Salt Lake City, Utah, and Pioche, Nevada, passes through the tp; entering the tp. on the E. bdy. near the tp. cor. of Tps. 27 and 28 S., Rs. 13 and 14 W., and bearing southwesterly, leaving the tp. on the W. bdy. near the $\frac{1}{4}$ sec. cor. secs. 25 and 30. An old ungraded road, between Lund and Newhouse, passes through the southeastern portion of the tp.; entering the tp. on the S. bdy. of sec. 35, near the cor. secs. 35 and 36, and bearing northeasterly, leaving the tp. on the E. bdy., near the $\frac{1}{4}$ sec. cor. of sec. 24. There are numerous old roads, passable to automobiles, and used by stockmen, throughout the tp.

The nearest town is Milford, Utah, which lies easterly approximately 30 miles distant.

The mean magnetic declination is $16^{\circ}45'E$.

GENERAL INSTRUCTIONS, T. B. ...

The first of the ... and ...
 light colored ... and ...
 and ... and ...
 short ... and ...
 with ... and ...
 no ... and ...
 mountain ... and ...

... and ...
 ... and ...
 ... and ...
 ... and ...
 ... and ...

... and ...
 ... and ...
 ... and ...
 ... and ...
 ... and ...

... and ...
 ... and ...
 ... and ...
 ... and ...
 ... and ...

... and ...
 ... and ...
 ... and ...
 ... and ...
 ... and ...

... and ...
 ... and ...
 ... and ...
 ... and ...
 ... and ...

... and ...
 ... and ...
 ... and ...
 ... and ...
 ... and ...

... and ...
 ... and ...
 ... and ...
 ... and ...
 ... and ...

... and ...
 ... and ...
 ... and ...
 ... and ...
 ... and ...

CERTIFICATE OF UNITED STATES SURVEYOR

Elliot Bird, U.S. Surveyor, and Edward Eliason, and Hoffman C. Hughes, Transitmen (temp. PWA), HEREBY CERTIFY upon honor that,

pursuance of special instructions bearing date of the 29th day of July, 1936, received from the district cadastral engineer for Utah, with assignment instructions dated Oct. 30, 1936, I have ~~resurveyed~~ Resurveyed the north, south, east, and west boundaries, and surveyed the subdivision of T. 28 S., R. 14 W.

of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in the specific manner described in the foregoing field notes.

Certified to at Salt Lake City, Utah

April 12, 1937

Signatures of Elliot Bird (U.S. Surveyor), Edward Eliason (Transitman), and Hoffman C. Hughes (Transitman).

CERTIFICATE OF APPROVAL

OFFICE OF U.S. SUPERVISOR OF SURVEYS,

Denver, Colorado APR 15 1937, 19

The foregoing field notes of the ~~survey~~ Resurvey of the north, south, east, and west boundaries, and the survey of the subdivision of T. 28 S., R. 14

executed by Elliot Bird, U.S. Surveyor, Edward Eliason and Hoffman C. Hughes, Transitmen (Temporary PWA) under special instructions dated July 29, 1936, and assignment instructions dated Oct. 30, 1936, having been critically examined, and the necessary corrections made prior to their certification by the engineer, the said field notes, and the survey therein described, are hereby approved.

Signature of U.S. Supervisor of Surveys.

CERTIFICATE OF TRANSCRIPT

I certify that the foregoing transcript of the field notes of the above-described surveys in is a true copy of the original field notes on file in the public survey office.

U.S. Supervisor of Surveys.

Blank

Page

Blank

Page

4-679
(April 1933)

BOOK A-522

"B"

FIELD NOTES

INDEPENDENT RESURVEY OF THE NORTH AND WEST BOUNDARIES,

AND SURVEY OF THE SUBDIVISION OF

T. 30 S., R. 14 W.

Of the Salt Lake Meridian,

in the State of Utah

EXECUTED BY

Elliot Bird, Surveyor, Kenneth C. Vincent, Public Land Surveyor,

Edward Eliason, Molen Roper, and Kelvin Winwood, Transitmen.

Under special instructions dated July 29, 1936, which provided

for the surveys included under Group No. 270, bearing the approval of the

Commissioner of the General Land Office under date of September 12, 1936

and assignment instructions dated _____, 19 and supplemental
assignment instructions dated April 1, 1937.

Survey commenced April 9, 1937

Survey completed May 1, 1937

Map A-522

INDEX DIAGRAM.

Township 30 South, Range 14 West,
 7 6 5 4 3 2 1

| | | | | | |
|----|----|----|----|----|----|
| 15 | 80 | 63 | 50 | 39 | 27 |
| 79 | 78 | 62 | 50 | 38 | 27 |
| 13 | 77 | 61 | 49 | 37 | 26 |
| 76 | 75 | 59 | 48 | 36 | 25 |
| 12 | 74 | 58 | 46 | 35 | 23 |
| 72 | 71 | 57 | 45 | 34 | 22 |
| 11 | 70 | 56 | 44 | 32 | 21 |
| 69 | 68 | 55 | 43 | 32 | 20 |
| 9 | 67 | 54 | 41 | 30 | 19 |
| 66 | 65 | 53 | 40 | 30 | 18 |
| 8 | 64 | 51 | 40 | 28 | 16 |
| | | | | | |

T. 30 S., R. 14 W.

The survey of T. 30 S., R. 14 W., Salt Lake Meridian, Utah, was commenced April 9, 1937, and executed with Buff and Buff transits Nos. 18003, 16725, 9978, Young and Sons transit No. 8581, and K. and E. transit No. 20576. The survey was executed by Elliot Bird, U. S. Surveyor, Kenneth C. Vincent, Public Land Surveyor, and Transitman Edward Eliason, Molen Roper, and Kelvin Winwood. Except the K. and E. transit, the instruments are equipped with Smith Solar attachments. They all have full vertical circles, and the horizontal limbs are provided with two double verniers placed opposite to each other and reading to single minutes of arc, which is also the least count of the verniers of the vertical circles. The instruments were approved for use on this survey, conditional upon satisfactory field tests, by the district cadastral engineer for Utah, in supplemental assignment instructions dated April 1, 1937.

During the progress of this survey the solar attachments were not used, and all azimuths in this record are referred to true meridians determined by observations on Polaris, made during the progress of the survey, by the method of deflection angles and calculated courses, and the lines of the survey were projected by fore and back sights.

The instruments were in good condition and adjustment at the commencement of the survey, and in order to obtain a true meridian for the commencement of the survey, we proceed as follows:

April 10, 1937: Stationed at the standard corner of sections 35 and 36, T. 30 S., R. 14 W., Salt Lake Meridian, Utah, in approximate latitude $38^{\circ}09'N.$, longitude $113^{\circ}22'W.$, with Buff and Buff transit No. 18003, at 7h 04.6m a.m. 105th meridian time, we make an hour angle observation on Polaris east of the meridian, making four observations, two each with the telescope in direct and reversed positions, reading the horizontal deflection angle from a flag pole about 40 chains N., in the direction east to Polaris.

| | |
|---|-------------------|
| Watch fast of local mean time - - - - | 00h 33.5m |
| Local mean time of observation - - - - | 6h 31.1m a.m. |
| Mean horizontal deflection angle from flag pole to Polaris - - - - - | $0^{\circ} 79'E.$ |
| Azimuth of Polaris - - - - - | $0^{\circ} 79'E.$ |
| True bearing to flag pole - - - - - | North. |

The watches carry correct 105th meridian standard time, comparison being made daily with naval observatory time signals over radio station K S L. In order to verify the latitude of the above station, we make a meridian altitude observation of the sun for latitude, observing the altitude of the sun's lower limb with the transit in direct position, reversing the telescope and observing the sun's upper limb.

| | |
|------------------------------------|--------------------|
| Apparent time of observation, noon | 12h 00m 00s |
| Mean observed altitude - - - - - | $59^{\circ} 52'$ |
| Reduced latitude - - - - - | $38^{\circ} 09'N.$ |

The instruments were kept in good adjustment throughout the progress of this survey, and numerous hour angle observations were made upon Polaris to determine true meridians from which the lines of the survey were deflected.

All measurements were made with Lallie steel tapes 5 chains in length, compared with a Lufkin standard steel tape, one chain in length, and found correct. The measurements were made on the slope, the vertical angle determined with clinometers, and the slope measurements reduced to true horizontal distances which only appear in these notes.

INDEPENDENT RESURVEY NORTH BOUNDARY T. 30 S., R. 14 W.

Chains

Independent resurvey of the North Boundary
T. 30 S., R. 14 W., executed by T. C. Bailey, U.S. Deputy
Surveyor, in 1937.

Note: None of the corners of the original survey of
this boundary were found.

From the corner of Ts. 29 and 30 S., Rs. 13 and 14 W.,
an iron post, 3 ins. diam., extending 18 ins. above
the ground, set, marked, and witnessed as described in
the official record of the survey of T. 30 S., R. 13 W.,
Group 22, Utah.

West, between sections 1 and 36.

Ascend gradual E. slope of rolling bench land, through
medium dense short undergrowth.

21.50 Old road, bears S.10°E. and N.5°W.

40.00 On gradual E. slope, 70 ft. above the township corner.

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in
the ground, for $\frac{1}{4}$ section corner, with brass cap marked

S 36
 $\frac{1}{4}$ ———
S 1
1937

raise a mound

of stone, 3 ft. base, 2 ft. high, N. of corner.

Continue gradual ascent over general E. slope of
rolling bench land.

80.00 On gradual E. slope, 75 ft. above the $\frac{1}{4}$ section corner.

Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in
the ground, for the corner of sections 1, 2, 35, and 36,
with brass cap marked

T 29 S R 14 W
S 35 S 36
S $\frac{1}{4}$ S 1
T30S
1937

of stone, 3 ft. base, 2 ft. high, W. of corner. raise a mound

Land, rolling bench, with a general easterly exposure
and drainage.

Soil, deep light colored clay, lying on a heavy clay
subsoil; 3rd rate.

Undergrowth, dense short sagebrush, yellowtop, Russian
thistle and weeds.

No timber.

Fair grazing land.

West, between sections 2 and 35,

Ascend gradual E. slope of rolling bench land, through
dense short undergrowth.

INDEPENDENT RESURVEY NORTH BOUNDARY T. 30 S., R. 14 W.

Chains

38.00 Enter scattered scrub juniper and pinon timber, bears N. and S.

39.30 Old road, bears S.15°E. and N.15°W.

40.00 At base of rolling mountainous land, 70 ft. above section corner, bears N. and S.

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked

S 35
—
S 2
1937

from which

A juniper, 5 ins. diam., bears S.69°E., 149 links distant, marked $\frac{1}{4}$ S 2 B T

A juniper, 6 ins. diam., bears N.75°45'W., 292 links distant, marked $\frac{1}{4}$ S 35 B T

Thence ascend gradual NE. slope.

54.90 Spur, 130 ft. above the $\frac{1}{4}$ section corner, slopes N.15°E.; descend abrupt NW. slope.

59.70 Bend in draw, 80 ft. below spur, drains N.60°E. from N.70°W.; ascend along N. slope at S. edge of draw.

76.20 Same draw, drains N.75°E.; ascend gradual SE. slope.

80.00 On gradual SE. slope, 30 ft. above bend in draw.

Set an iron post, 3 ft. long, 2 ins. diam., 6 ins. in the ground, to solid rock, and in a mound of stone to top, for corner of sections 2, 3, 34, and 35, with brass cap marked

T 29 S R 14 W
S 34 | S 35
S. 3 | S 2
T30S
1937

from which

A juniper, 6 ins. diam., bears N.47°15'E., 102 links distant, marked T29S R14W S35 BT

A juniper, 6 ins. diam., bears S.38°30'E., 55 links distant, marked T30S R14W S2 BT

A juniper, 4 ins. diam., bears S.35°W., 20 links distant, marked T30S R14W S3 BT

A juniper, 10 ins. diam., bears N.16°15'W., 60 links distant, marked T29S R14W S34 BT

Land, E. portion of mile, is rolling bench land, and W. portion is rolling and mountainous; general easterly exposure and drainage. Limestone, volcanic, and quartzite formations.

Soil, shallow light colored clay with a rocky surface, lying on limestone bedrock; 4th rate.

Undergrowth, short sagebrush, yellowtop and weeds.

INDEPENDENT RESURVEY NORTH BOUNDARY T. 55S R. 14 W.

Chains

anishD

Timber, scrub juniper and piñon on W. portion of mile
Fair grazing land.

West, between sections 3 and 34.

Ascend gradual SE. slope of rolling mountainous land,
through medium dense scrub timber and short undergrowth.

6.40 Wash, 25 links wide, 1 1/2 ft. deep, in shallow draw, drains
S. 60° E.

26.70 Recross wash in draw, drains NE.

39.00 Wood road, bears N. 20° E. and S. 20° W.

40.00 On rolling land, 40 ft. above section corner.

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in
the ground, for 1/4 section corner, with brass cap marked

S 34

1/4

S 3

1937

from which

A juniper, 6 ins. diam., bears N. 9° 15' E., 46 links
distant, marked 1/4 S34 BT

A juniper, 10 ins. diam., bears S. 38° 45' W., 131
links distant, marked 1/4 S3 BT.

42.00 Recross wash in draw, drains S. 85° E.

80.00 On gradual NE. slope of rolling mountainous land,
50 ft. above the 1/4 section corner.

Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in
the ground, for corner of sections 3, 4, 33, and 34,
with brass cap marked,

T29S R14W

S33 S34

S 4 S 3

T30S

1937

from which

A piñon, 9 ins. diam., bears N. 44° 15' E., 188
links distant, marked B T

A juniper, 20 ins. diam., bears S. 76° 30' E., 124
links distant, marked S3 BT

A piñon, 4 ins. diam., bears S. 56° 30' W., 126
links distant, marked BT

A juniper, 7 ins. diam., bears N. 39° E., 135
links distant, marked BT

Trees too scrubby for other marks.

Land, rolling and mountainous, with a general easterly
exposure and drainage. Limestone, volcanic, and quartz-
ite formations.

AL .R . . ~~INDEPENDENT~~ RESURVEY OF NORTH BOUNDARY T. 30 S., R. 14 W.

Chains

Soil, rocky shallow light colored clay and sand, lying on bedrock; 4th rate.

Undergrowth, short sage and bitter brush, yellowtop and weeds.

Timber, scrub juniper and pinon.

Fair grazing land.

West, between sections 4 and 33.

Ascend gradual NE. slope of rolling mountainous land, through dense scrub timber and short undergrowth.

38.50 Draw, 150 ft. above section corner, drains N.80°E.; thence ascend gradual SE. slope.

40.00 On gradual SE. slope, 190 ft. above section corner.

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked

S 33

$\frac{1}{4}$ —

S 4

1937

from which

A juniper, 6 ins. diam., bears N.6°E., 94 links distant, marked $\frac{1}{4}$ S33 BT

A juniper, 6 ins. diam., bears S.12°E., 10 links distant, marked $\frac{1}{4}$ S4 BT

Continue gradual ascent over SE. slope.

53.30 Spur, 110 ft. above the $\frac{1}{4}$ section corner, slopes N.; descend along a gradual N. slope.

77.00 Wash, 20 links wide, 2 ft. deep, in draw, 90 ft. below spur, drains N.50°E.; wood road in wash, bears N.50°E. and S.70°W.; ascend gradual SE. slope.

80.00 On gradual SE. slope, 10 ft. above draw.

Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, for corner of sections 4, 5, 32, and 33, with brass cap marked

T29S R14W

S 32 | S 33

S 5 | S 4

T30S

1937

from which

A pinon, 6 ins. diam., bears N.70°15'E., 123 lks. dist., marked S53 BT

A pinon, 4 ins. diam., bears S.32°30'E., 81 links distant, marked S4 BT

A juniper, 30 ins. diam., bears S.72°15'W., 16 links distant, marked T30S R14W S5 BT

INDEPENDENT RESURVEY OF NORTH BOUNDARY T. 30 S., R. 14 W

Chains

CHAINS

A juniper, 12 ins. diam., bears N.34°W., 56 links distant, marked S32 BT

The bearing trees in sections 4, 32, and 33, are too scrubby for other marks.

Land, rolling and mountainous, with a general northeasterly exposure and drainage. Limestone, volcanic, and quartzite formations.

Soil, shallow light colored clay with a rocky surface, lying on bedrock; 4th rate.

Undergrowth, short sage, bitter brush, yellowtop and weeds.

Timber, scrub juniper and pinon.

Fair grazing land.

West, between sections 5. and 32.

Ascend gradual SE. slope of rolling mountainous land, through dense scrub timber and short undergrowth.

39.20 Spur, 210 ft. above corner, slopes N.; descend gradual W. slope.

40.00 On rocky W. slope, at base of descent, 10 ft. below spur, bears N. and S.

Set an iron post, 3 ft. long, 1 in. diam., 15 ins. in the ground to solid rock, and in a mound of stone to top, for $\frac{1}{4}$ section corner, with brass cap marked

S 32
 $\frac{1}{4}$ ———
 S 5
 1937

from which

A juniper, 7 ins. diam., bears S.61°45'E., 52 links distant, marked $\frac{1}{4}$ S5 BT

A pinon, 16 ins. diam., bears N.24°W., 144 links distant, marked $\frac{1}{4}$ S32 BT

Thence ascend gradually over rocky E. slope.

45.00 Timber becomes scattered, and enter red volcanic formation, bears N. and S.

72.40 Top of divide ridge, 360 ft. above the $\frac{1}{4}$ section corner, bears N.20°E. and S.; descend gradually over W. slope.

80.00 On gradual rocky W. slope, 40 ft. below ridge.

Set an iron post, 3 ft. long, 2 ins. diam., 20 ins. in the ground to solid rock, and in a large mound of stone to top, for corner of sections 5, 6, 31 and 32, with brass cap marked

T29S, R14W
 S 31 S 32
 S 4 S 5
 T30S
 1937

from which

INDEPENDENT RESURVEY NORTH BOUNDARY T. 50 S., R. 14 W.

Chains

A pinon, 6 ins. diam., bears N. 61° E., 94 links distant, marked BT. Tree too scrubby for other marks.

A pinon, 3 ins. diam., bears S. 33° E., 50 links distant, marked BT

A pinon, 10 ins. diam., bears S. 28° W., 60 links distant, marked T30S R14W S6 BT

A juniper, 30 ins. diam., bears N. 7° 30' W., 25 links distant, marked T29S R14W S31 BT

Land, rolling and mountainous, with a general easterly and westerly exposure and drainage. Volcanic formation.

Soil, shallow clay and sand, with rocky surface; 4th rate.

Undergrowth, sagebrush, yellowtop and weeds.

Timber, scrub juniper and pinon.

Fair grazing land.

West, between sections 6 and 31.

Descend gradual W. slope of rolling mountainous land, through medium dense timber and short undergrowth.

32.00 Leave timber and enter wide open sagebrush swale, draining S.

40.00 In bottom of swale, 320 ft. below section corner, drains S.

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked

S 31
 $\frac{1}{4}$ ———
 S 6
 1937

from which

A juniper, 15 ins. diam., bears S. 73° W., 190 links distant, marked $\frac{1}{4}$ S6 BT

A juniper, 7 ins. diam., bears N. 30° 30' W., 75 links distant, marked $\frac{1}{4}$ S31 BT

41.00 Leave open sagebrush swale and enter dense scrub timber, bears N. and S.; thence over rolling land.

55.00 Begin gradual ascent over rocky E. slope, bears N. and S.

68.00 Spur, 100 ft. above the $\frac{1}{4}$ section corner, projects S. 30° W.; descend gradual W. slope.

74.00 Wash, 40 links wide, 2 ft. deep, in draw, 110 ft. below spur, drains S. 30° E.; ascend gradual E. slope.

79.96 The corner of Ts. 29 and 30 S., Rs. 14 and 15 W., subsequently set at this point.

INDEPENDENT RESURVEY NORTH BOUNDARY T. 30 S., R. 14 W.

Chains

80.00 Set temporary corner of T. 29 and 30 S., Rs. 14 and 15 W.
 Land, broken and mountainous, with general southerly exposure and drainage. Volcanic formation.
 Soil, shallow loose sand and clay, lying on a heavy clay subsoil; 4th rate.
 Undergrowth, sage and bitter brush, mountain rush, yellowtop and weeds.
 Timber, scrub juniper and pinon.
 Fair grazing land.

INDEPENDENT RESURVEY WEST BOUNDARY T. 30 S., R. 14 W.

Independent resurvey superseding survey executed by T.C.Bailey, U. S. Deputy Surveyor, in 1882.

From the standard corner of T. 30 S., Rs. 14 and 15 W., an iron post, 3 ins. diam., set, marked, and witnessed, as described in the official record of the survey of T. 31 S., R. 14 W., Group 2, Utah.

North, between sections 31 and 36.

Ascend gradual S. slope of rolling mountainous land, through scattered timber and dense short undergrowth.

- 2.80 Dim road, bears N.70°W. and S.70°E.
 - 3.50 Timber becomes dense, bears E. and W.
 - 9.70 Spur, 40 ft. above corner, projects SE.; descend gradual N. slope.
 - 33.10 Draw, 50 ft. below spur, drains S.35°E.; ascend gradual S. slope.
 - 40.00 On gradual S. slope, 50 ft. above draw.
- Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked



from which

- A juniper, 26 ins. diam., bears S.44°E., 60 links distant, marked $\frac{1}{4}$ S31 BT
- A juniper, 9 ins. diam., bears N.11°45'W., 45 links distant, marked $\frac{1}{4}$ S36 BT

No trace of the original $\frac{1}{4}$ section corner found.


- 56.60 Top of ascent, 50 ft. above the $\frac{1}{4}$ section corner, bears E. and W.; descend gradual N. slope.
- 73.50 Fisher's Wash, 80 links wide, 4 ft. deep, 40 ft. below top of ascent, drains S.80°E.; ascend gradual S. slope.
- 77.20 Old road, bears N.70°W. and S.80°E.

INDEPENDENT RESURVEY WEST BOUNDARY T. 30 S., R. 14 W.

Chains

80.00 On gradual S. slope, 150 ft. above wash

Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, for corner of sections 25, 30, 31, and 36, with brass cap marked



from which

A juniper, 12 ins. diam., bears N. 32° E., 190 links distant, marked T30S R14W S30 BT

A juniper, 3 ins. diam., bears S. 59° E., 239 links distant, marked S31 BT

A juniper, 11 ins. diam., bears N. 16° 45' W., 369 links distant, marked T30S R15W S25 BT

No southwest bearing tree available.

From this corner the original corner of sections 25, 30, 31, and 36, bears N. 62° 30' W., 10.83 chains distant. Corner is a volcanic stone 24x12x8 ins., marked 1 notch on S. edge and 5 notches on N. edge, and witnessed by two bearing trees. I efface the marks on the corner monument and bearing trees.

Land, rolling and mountainous, with a general southeasterly exposure and drainage.

Soil, shallow and deep loose sand and clay, lying on a heavy clay subsoil; 4th rate.

Undergrowth, sage and bitter brush, mountain rush, yellowtop, weeds and grass.

Timber, scrub juniper and pinon.

Fair grazing land.

North, between sections 25 and 30.

Ascend gradual S. slope of rolling mountainous land, through scattered scrub timber and medium dense short undergrowth.

4.00 Top of ascent 45 ft. above corner, bears N. 80° W. and S. 70° E.; descend gradual NE. slope.

12.80 Enter bottom lands of wide draw, bears N. 20° W. and S. 20° E.

17.80 Wash, 150 links wide, 5 ft. deep, in wide draw, 40 ft. below top of ascent, drains S. 30° E.; continue across bottom lands of draw.

23.00 Leave bottom lands of draw and enter dense timber, bears N. 30° W. and S. 20° E.; thence over rolling land.

25.80 Low spur, 10 ft. high, projects W.

28.80 Draw, 20 ft. deep, drains S. 10° W.; ascend gradual SE. slope.

INDEPENDENT RESURVEY WEST BOUNDARY T. 30 S., R. 14 W.

Chains

40.00 On gradual SE. slope, 40 ft. above draw.

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked

↑
S 25 | S 30
1937

from which

A juniper, 12 ins. diam., bears S.4°30'E., 19 links distant, marked $\frac{1}{4}$ S30 BT

A pinon, 7 ins. diam., bears S.44°15'W., 46 links distant, marked $\frac{1}{4}$ S25 BT

From this corner the original $\frac{1}{4}$ section corner of sections 25 and 30, bears N.58°27'W., 11.22 chains distant. The corner is a granite 18x13x6 ins., firmly set, marked $\frac{1}{4}$ on W. face, and witnessed by 2 bearing trees. I efface the marks on the corner monument and bearing trees.

62.70 Spur, 65 ft. above the $\frac{1}{4}$ section corner, projects W.; descend gradual N. slope.

72.70 Draw, 10 ft. below spur, drains W.; ascend gradual S. slope.

80.00 On gradual S. slope, 30 ft. above draw.

Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, for corner of sections 19, 24, 25, and 30, with brass cap marked

T30S
R15W R 14W
S 24 | S 19
S 25 | S 30
1937

from which

A juniper, 21 ins. diam., bears N.27°E., 55 links distant, marked T30S R14 W S19 BT

A juniper, 9 ins. diam., bears S.49°E., 31 links distant, marked BT. Tree too scrubby for other marks.

A pinon, 6 ins. diam., bears S.53°30'W., 19 links distant, marked T30S R15W S25 BT

A pinon, 16 ins. diam., bears N.51°30'W., 156 links distant, marked T30S R15W S24 BT

From this corner the original corner of sections 19, 24, 25, and 30, bears N.58°40'W., 10.30 chains distant. The corner is a quartzite, 17x8x5 ins., firmly set, marked 4 notches on N. edge, and 2 notches on S. edge, and witnessed by three bearing trees. I efface the marks on the corner monument and bearing trees.

Land, rolling and mountainous, with a general southerly exposure and drainage.

Soil, deep and shallow loose sand and clay, lying on a heavy clay subsoil; 4th rate.

Undergrowth, sage and bitter brush, mountain rush, yellowtop and weeds.

W. AL. INDEPENDENT RESURVEY WEST BOUNDARY T. 30. S. R. 14 W.

| Chains | | | | | | | | | |
|--------|--|------|------|------|------|------|------|------|--|
| | <p>Timber, scrub juniper and pinon.</p> <p>Fair grazing land.</p> | | | | | | | | |
| | <p>North, between sections 19 and 24.</p> <p>Ascend gradual S. slope of rolling mountainous land, through dense timber and scattered short undergrowth.</p> | | | | | | | | |
| 7.70 | Spur, 15 ft. high, projects W. | | | | | | | | |
| 19.60 | Wash, 15 links wide, 2 ft. deep, drains SE. | | | | | | | | |
| 25.20 | Wash, 35 links wide, 2 ft. deep, drains S.30°E.; ascend gradual S. slope. | | | | | | | | |
| 40.00 | On gradual S. slope, 55 ft. above wash. | | | | | | | | |
| | <p>Set an iron post, 3 ft. long, 1 in. diam., 24 ins. in the ground to solid rock, and in a large mound of stone to top, for $\frac{1}{4}$ section corner, with brass cap marked</p> | | | | | | | | |
| | <p>†</p> <table border="1" style="margin: auto;"> <tr> <td>S24</td> <td>S19</td> </tr> <tr> <td colspan="2">1937</td> </tr> </table> | S24 | S19 | 1937 | | | | | |
| S24 | S19 | | | | | | | | |
| 1937 | | | | | | | | | |
| | from which | | | | | | | | |
| | <p>A pinon, 6 ins. diam., bears N.20°E., 31 links distant, marked $\frac{1}{4}$ S19 BT.</p> <p>A pinon, 5 ins. diam., bears W. 12 links distant, marked $\frac{1}{4}$ S24 BT.</p> | | | | | | | | |
| | <p>From this corner the original $\frac{1}{4}$ section corner of secs. 19 and 24, bears N.53°21'W., 11.24 chains distant. The corner is a granite, 19x10x7 ins., firmly set, marked $\frac{1}{4}$ on W. face, and witnessed by 2 bearing trees. I efface the marks on the corner monument and bearing trees.</p> | | | | | | | | |
| 41.00 | Top of divide ridge, 10 ft. above the $\frac{1}{4}$ section corner, bears N.80°E. and W.; descend gradual N. slope. | | | | | | | | |
| 42.70 | Wash, 10 links wide, 2 ft. deep, in draw, 35 ft. below ridge, drains NE.; descend gradually along E. slope. | | | | | | | | |
| 52.40 | Wash, 15 links wide, 2 ft. deep, in draw, 70 ft. below ridge, drains E.; ascend steep S. slope. | | | | | | | | |
| 60.50 | Spur, 50 ft. above draw, projects N.50°E.; descend steep N. slope. | | | | | | | | |
| 80.00 | On S. rim of draw, 110 ft. below spur, bears S.85°E. and W. | | | | | | | | |
| | <p>Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, for corner of sections 13, 18, 19, and 24, with brass cap marked</p> | | | | | | | | |
| | <p>T303</p> <table border="1" style="margin: auto;"> <tr> <td>R15W</td> <td>R14W</td> </tr> <tr> <td>S 13</td> <td>S 18</td> </tr> <tr> <td>S 24</td> <td>S 19</td> </tr> <tr> <td colspan="2">1937</td> </tr> </table> | R15W | R14W | S 13 | S 18 | S 24 | S 19 | 1937 | |
| R15W | R14W | | | | | | | | |
| S 13 | S 18 | | | | | | | | |
| S 24 | S 19 | | | | | | | | |
| 1937 | | | | | | | | | |
| | from which | | | | | | | | |
| | <p>A juniper, 20 ins. diam., bears N.65°E., 140 links distant, marked S18 BT. Tree too scrubby for other marks.</p> | | | | | | | | |

INDEPENDENT RESURVEY WEST BOUNDARY T. 30 S. R. 14 W.

Chains

A pinon, 3 ins. diam., bears S. 9°30'E., 41 links distant, marked BT

A juniper, 14 ins. diam., bears S. 30°W., 112 links distant, marked T30S R15W S24 BT

A juniper, 9 ins. diam., bears N. 77°W., 117 links distant, marked S13 BT

Unable to find any trace of the original corner of sections 13, 18, 19, and 24.

Land, rolling and mountainous, with a general southerly and northeasterly exposure and drainage.

Soil, shallow light colored clay and sand, lying on bedrock or a heavy clay subsoil; 4th rate.

Undergrowth, sage and bitter brush, mountain rush, yellowtop and weeds.

Timber, scrub juniper and pinon.

Fair grazing land.

North, between sections 13 and 18.

Over rolling mountainous land, through scattered timber and dense short undergrowth.

.60 Enter bottom of wash, draining S. 85°E.

6.00 Dim road in wash, bears S. 85°E. and N. 85°W.

6.40 Leave wash, draining S. 85°E.; in bottom of wide draw; ascend steep N. rim of draw.

13.10 Top of N. rim of draw, 90 ft. above bottom, bears S. 70°E. and N. 85°W.; descend gradual N. slope.

30.00 Wash, 50 links wide, 4 ft. deep, in draw, 75 ft. below rim, drains S. 75°E.; ascend steep S. slope.

40.00 On spur, 90 ft. above draw, projects S. 70°E.

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked

$\frac{1}{4}$
 S13 | S18
 1937

from which

A juniper, 4 ins. diam., bears N. 11°30'E., 104 links distant, marked $\frac{1}{4}$ S18 BT

A pinon, 10 ins. diam., bears N. 82°15'W., 112 links distant, marked $\frac{1}{4}$ S13 BT

From this corner the original $\frac{1}{4}$ section corner of sections 13 and 18, bears N. 58°W., 12.78 chains distant. The corner is a granite, 20x18x5 ins., firmly set, marked on W. face and witnessed by 2 bearing trees. I efface the marks on the corner monument and bearing trees.

Descend gradual NE. slope.

INDEPENDENT RESURVEY WEST BOUNDARY T. 30 S., R. 14 W.

Chains

- 46.80 Draw, 30 ft. deep, drains S. 85° E.
 48.70 Low spur, 30 ft. high, projects E.
 59.90 Draw, 30 ft. deep, drains S. 70° E.; ascend steep S. slope.
 60.20 Dim road, bears N. 80° E. and N. 85° W.
 66.50 Rocky spur, 90 ft. above draw, projects N. 30° W.; descend steep rocky NE. slope.
 66.56 From this point, the open cut of a small mine, bears N. 16° 20' E. For additional bearing, see that given at the corner of sections 7, 12, 13, and 18.
 80.00 At base of NE. slope, 110 ft. below spur, bears SE. and NW.

Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, for corner of sections 7, 12, 13, and 18, with brass cap marked

T306

R15W R14W
 S 12 S 7
 S 13 S 18
 1937

From which

A juniper, 6 ins. diam., bears S. 58° 50' W., 60 links distant, marked T306 R15W S13 BT

A juniper, 7 ins. diam., bears N. 65° 15' W., 178 links distant, marked S12 BT. Tree too scrubby for other marks.

No suitable bearing trees available in sections 7 and 18.

From this corner, an open cut to a small mine, bears N. 31° E.

From same corner the original corner of sections 7, 12, 13, and 18, bears N. 55° 35' W. 13.09 chains distant. The corner is a granite, 18x18x5 ins., firmly set, marked 2 notches on N. edge and 4 notches on S. edge, and witnessed by 2 bearing trees. I efface the marks on the corner monument and bearing trees.

Land, rolling and mountainous, with a general southeasterly exposure and drainage. Volcanic formation.

Soil, shallow and deep loose sand and clay, lying on bedrock or a heavy clay subsoil; 4th rate.

Undergrowth, sage and bitter brush, mountain rush, yellowtop and weeds.

Timber, scrub juniper and pinon.

Fair grazing land.

North, between sections 7 and 12.

Over rolling mountainous land, through medium dense timber and short undergrowth.

- 7.10 Main wash, 50 links wide, 8 ft. deep, in draw, drains S. 10° E.

INDEPENDENT RESURVEY WEST BOUNDARY T. 30 S., R. 14 W.

- Chains
 - 14.10 Recross wash, drains S.10°W.; road, bears west, 68.00 N.10°W. and S.10°E.
 - 17.20 Prospect hole, bears E. 4.00 chains distant.
 - 21.90 Recross road, bears NE. and SW.
 - 40.00 On rolling land, 110 ft. above section corner.
Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked
- | |
|------------|
| ↑ |
| S 12 S 7 |
| 1937 |

from which
- A juniper, 9 ins. diam., bears N.49°15'E., 117 links distant, marked $\frac{1}{4}$ S7 BT
 - A juniper, 7 ins. diam., bears S.57°45'W., 13 links distant, marked $\frac{1}{4}$ S12 BT
- From this corner the original $\frac{1}{4}$ section corner of sections 7 and 12, bears N.53°59'W., 13.36 chains distant. The corner is a volcanic stone, 18x16x10 ins., firmly set, marked $\frac{1}{4}$ on W. face, and witnessed by 2 bearing trees. I efface the marks on the corner monument and bearing trees.
- From same corner a small spring of good water, bears N.85°03'E. 5.68 chains distant.
- A concrete watering tank, 60 links in diam., bears S.84°45'E. 6.15 chains distant.
- A small spring of good water, bears N.55°08'E. 10.22 chains distant.
- The SW. corner of an old cabin, bears S.82°04'E. 29.89 chains distant.
- 64.90 Fork of spur, 150 ft. above the $\frac{1}{4}$ section corner, projects NE.; descend rocky N. slope.
- 80.00 In bottom lands of draw, 85 ft. below spur.
Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, for the corner of sections 1, 5, 7, and 12, with brass cap marked
- | | |
|------|------|
| T30S | |
| R15W | R14W |
| S 1 | S 6 |
| S 12 | S 7 |
| 1937 | |

from which
- A juniper, 5 ins. diam., bears N.8°15'E., 464 links distant, marked BT. Tree too scrubby for other marks.
 - A juniper, 3 ins. diam., bears S.34°E., 128 links distant, marked S7 BT
 - A pinon, 8 ins. diam., bears S.74°45'W., 187 links distant, marked T30S R15W S12 BT

INDEPENDENT RESURVEY WEST BOUNDARY T. 30 S., R. 14 W.

Chains

A pinon, 18 ins. diam., bears N.50°W., 532 links distant, marked T30S, R15W S1 BT

From this corner the original corner of sections 1, 6, 7, and 12, bears N.51°W. 13.11 chains distant. The corner is a volcanic stone, 18x13x5 ins., firmly set, marked 1 notch on N. edge and 5 notches on S. edge, and witnessed by 1 bearing tree. I efface the marks on the corner monument and bearing tree.

Land, rolling and mountainous, with a general southerly exposure and drainage. Limestone and volcanic formations.

Soil, shallow and deep loose sand and clay, lying on bedrock and in a heavy clay subsoil; 4th rate.

Undergrowth, sage and bitter brush, mountain rush, yellowtop and weeds.

Timber, scrub juniper and pinon.

Fair grazing land.

North, between sections 1 and 6.

Over rolling mountainous land, through medium dense timber and short undergrowth.


6.10 Wash, 35 links wide, 1 ft. deep, in draw, drains S.15°E.; ascend gradual S. slope.

23.60 Rocky spur, 125 ft. above corner, projects S.30°W., about 4 chains distant to end; descend rocky NW. slope.

28.30 Recross draw, 530 ft. below spur, drains SW.; ascend steep SE. slope.

40.00 On steep SE. slope, 85 ft. above draw.

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked



from which

A juniper, 6 ins. diam., bears N.79°15'E., 36 links distant, marked $\frac{1}{4}$ S6 BT

A juniper, 30 ins. diam., bears S.26°W., 13 links distant, marked $\frac{1}{4}$ S1 BT

From this corner the original $\frac{1}{4}$ section corner of sections 1 and 6, bears N.48°30'W. 14.90 chains distant. The corner is a limestone 12x8x4 ins., firmly set, marked $\frac{1}{4}$ on W. face and witnessed by 2 bearing trees. I efface the marks on the corner monument and bearing trees.

62.70 Top of ascent, 25 ft. above the $\frac{1}{4}$ section corner, bears E. and W.; descend gradual NW. slope.

75.30 Draw, 80 ft. below top of ascent, drains S.60°W.; ascend gradual S. slope.

83.79 Fall 4 links E. of the temporary corner of Ts. 29 and 30 S., Rs. 14 and 15 W., heretofore described.

INDEPENDENT RESURVEY WEST BOUNDARY T. 30 S., R. 14 W.

Chains

On gradual S. slope, 40 ft. above draw.

Set an iron post, 3 ft. long, 3 ins. diam., 30 ins. in the ground, for corner of Ts. 29 and 30 S., Rs. 14 and 15 W., with brass cap marked.

| | | | |
|------|------|--|--|
| T29S | | | |
| R15W | R14W | | |
| S 36 | S 31 | | |
| S 1 | S 6 | | |
| T30S | | | |
| 1937 | | | |

from which

- A pinon, 10 ins. diam., bears N.37°E., 16 links distant, marked T29S R14W S31 BT
- A juniper, 8 ins. diam., bears S.67°E., 98 links distant, marked T30S R14W S6 BT
- A pinon, 7 ins. diam., bears S.21°45'W., 210 links distant, marked T30S R15W S1 BT
- A pinon, 18 ins. diam., bears N.71°W., 32 links distant, marked T29S R15W S36 BT

From this corner the original corner of Ts. 29 and 30 S., Rs. 14 and 15 W. bears N.59°07'W. 10.45 chains distant. The corner is a granite, 27x16x7 ins., firmly set, marked 6 notches on N., S., and E. edges, and witnessed by 4 bearing trees. I efface the marks on corner monument and bearing trees.

Land, rolling and mountainous, with a general southerly exposure and drainage. Limestone and volcanic formations.

Soil, shallow and deep clay and sand, lying on bedrock; 4th rate.

Undergrowth, sage and bitter brush, mountain rush, yellowtop and weeds.

Timber, scrub juniper and pinon.

Fair grazing land.

SUBDIVISION OF T. 30 S., R. 14 W.

From the standard corner of sections 35 and 36, on the S. boundary of the township, which is an iron post, 3 ins. diam., set, marked, and witnessed as described in the official record of the survey of T. 31 S., R. 14 W., Group 2, Utah.

N.0°01'W., between sections 35 and 36.

Ascend gradually along bottom of draw, draining S. from the N. on the broken E. slope of Blue Mountain, through scattered scrub timber and short undergrowth.

7.50 Leave bottom of draw, drains S. from N.30°W.; ascend abrupt SW. slope.

13.70 Limestone spur, 260 ft. above corner, projects S.30°E.; thence ascend gradually along broken general E. slope.

30.20 Steep rocky draw, 20 ft. deep, drains E.; ascend abrupt SE. slope.

SUBDIVISION OF T. 30 S., R. 14 W.

Chains

40.00 On steep rocky SE. slope, 600 ft. above section corner.

Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground, to solid rock, and in a large mound of stone to top, for $\frac{1}{2}$ section corner, with brass cap marked

$\frac{1}{2}$
 S 35 | S 36

1937

from which

A pinon, 8 ins. diam., bears N.29°30'W., 125 links distant, marked $\frac{1}{2}$ S35 BT

No other bearing tree available.

43.00 Top of rocky point on steep spur, 30 ft. above the $\frac{1}{2}$ section corner; slopes E.; descend abrupt NE. slope over limestone ledges.

64.60 Draw, 300 ft. below spur, drains S.70°E., and heads N.70°W., about 8.00 chains distant; ascend steep S. slope.

72.20 Sandstone spur, 130 ft. above draw, projects E. 3.00 chains distant; thence N.; descend broken NW. slope.

80.00 On steep NW. slope, 190 ft. below spur.

Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, to solid rock, and in a large mound of stone to top, for corner of sections 25, 26, 35, and 36, with brass cap marked

T30S R14W

S 26 | S 25

S 35 | S 36

1937

from which

A juniper, 6 ins. diam., bears N.55°E., 204 links distant, marked T30S R14W S25 BT

A juniper, 6 ins. diam., bears S.36°30'E., 222 links distant, marked T30S R14W S36 BT

A juniper, 4 ins. diam., bears S.9°30'W., 117 links distant, marked T30S R14W S35 BT

A pinon, 5 ins. diam., bears N.37°30'W., 246 links distant, marked T30S R14W S26 BT

Land, broken E. slope of Blue Mountain, with a general easterly exposure and drainage. Limestone and sandstone formations.

Soil, shallow light colored clay and sand with a rocky surface, lying on limestone and sandstone bedrock; 4th rate.

Undergrowth, sage, black and bitter brush, grass and weeds.

Timber, scrub juniper and pinon.

Fair grazing land.

SUBDIVISION OF T. 30 S., R. 14 W.

Chains

East, on random line, between sections 25 and 36.

60.00 Set temporary $\frac{1}{2}$ section corner.

60.08 Intersect the E. boundary of the township, 18 links N. of the corner of sections 25, 30, 31, and 36, an iron post, 3 ins. diam., set, marked, and witnessed in the official records of the survey of T. 30 S., R. 14 W., Group 22, Utah.

Thence

N. 69° 55' E., on true line, between sections 25 and 36.

Ascend gradually over E. slope of rolling land, through scattered short undergrowth.

5.00 Wash, 30 links wide, 4 ft. deep, drains S. 60° E.; thence ascend gradual NE. slope.

15.00 Enter scattered juniper and piñon timber, bears N. and S.

40.04 On rocky NE. slope, 220 ft. above section corner.

Set an iron post, 3 ft. long, 1 in. diam., 24 ins. in the ground, to solid rock, and in a large mound of stone to top, for $\frac{1}{2}$ section corner, with brass cap marked

S 25
 $\frac{1}{2}$ ———
 S 36
 1937

alongside

of post, deposit a sandstone, 10x10x6 ins., marked X.

No suitable bearing trees available.

45.70 Mouth of large draw from the NW., 75 ft. above the $\frac{1}{2}$ section corner, at base of Blue Mountain, bears S. and N. 30° E., drains southeasterly in the form of a flood plain; ascend steep NE. slope of Blue Mountain.

64.10 Slope changes from an abrupt NE. slope to a gradual SE. slope.

67.00 Sandstone spur, 400 ft. above mouth of large draw, projects SE.; descend gradual SW. slope.

73.00 Head of draw, 50 ft. below spur, drains S. 30° E.; ascend gradual NE. slope.

76.70 Recross same spur, 30 ft. above head of draw, projects S. 60° E. from the S.; descend steep NW. slope.

81.00 The corner of sections 25, 26, 35, and 36, 10 ft. below spur.

Land, broken general E. slope of rolling foothills of Blue Mountain. Limestone and sandstone formations on mountainous land.

Soil, shallow light colored clay and sand, with a rocky surface, lying on limestone and sandstone bedrock, and a heavy clay subsoil; 4th rate.

Undergrowth, sage, black, and bitter brush, mountain root, yellowtop, weeds and grass.

SUBDIVISION OF T. 30 S., R. 14 W.

Chains

Timber, scrub juniper and pinon.
Fair grazing land.

N.0°01'W.; between sections 25 and 26.

Descend abrupt NW. slope of rough broken mountain land and descend general E. face of Blue Mountain, through medium dense scrub timber and short undergrowth.

7.40 Junction of draws, 70 ft. below corner, drains E. from S.60°W. and N.75°W.; ascend steep rocky S. slope.

17.20 Spur, 250 ft. above junction of draws, projects S.60°E.; descend steep NE. slope.

27.70 Large draw, 170 ft. below spur, drains S.70°E.; ascend steep S. slope.

38.50 Slope changes from an abrupt S. slope to an abrupt SE. slope.

40.00 On an abrupt rocky SE. slope, 470 ft. above draw.

Set an iron post, 3 ft. long, 1 in. diam., 6 ins. in the ground, to solid rock, and in a large mound of stone to top, for $\frac{1}{4}$ section corner, with brass cap marked

S 26 S 25
1937

from which

A pinon, 5 ins. diam., bears N.40°15'E., 99 links distant, marked $\frac{1}{4}$ S25 BT

A pinon, 10 ins. diam., bears S.71°W., 45 links distant, marked $\frac{1}{4}$ S26 BT

43.60 Rocky spur, 50 ft. above the $\frac{1}{4}$ section corner, projects S.70°E.; descend steep NE. slope.

54.30 Large draw, 300 ft. below spur, drains S.50°E.; ascend steep rocky SW. slope.

80.00 On steep rocky SW. slope, 630 ft. above bottom of large draw,

Set an iron post, 3 ft. long, 2 ins. diam., 12 ins. in the ground, to solid rock, and in a large mound of stone, to top, for corner of sections 23, 24, 25, and 26, with brass cap marked

T30S R14W
S 23 S 24
S 26 S 25
1937

from which

A pinon, 8 ins. diam., bears N.12°E., 76 links distant, marked T30S R14W S24 BT

A pinon, 10 ins. diam., bears S.49°30'E., 47 links distant, marked T30S R14 W S25 BT

A pinon, 6 ins. diam., bears S.71°30'W., 55 links distant, marked T30S R14W S26 BT

U.S. DEPARTMENT OF THE INTERIOR

| Chains | | Station |
|--------|--|---------|
| | A pinon, 6 ins. diam., bears N. 47° W. 50 links distant, marked T30S R14W S25 BT | |
| | Land, broken general E. slope of Blue Mountain. Limestone, sandstone and quartzite formations. | |
| | Soil, shallow light colored clay and sand with a rocky surface, lying on bedrock; 4th rate. | |
| | Undergrowth, sage, black and bitter brush, mountain rush yellowtop and weeds. | |
| | Timber, scrub juniper and pinon. | |
| | Fair grazing land. | |
| | S. 89° 55' E., on random line, between sections 24 and 25. | |
| 40.00 | Set temporary $\frac{1}{4}$ section corner. | |
| 80.04 | Intersect the E. boundary of the township, 50 links N. of the corner of sections 19, 24, 25, and 30, an iron post, 3 ins. diam., set marked and witnessed as described in the official record of the survey of T. 30 S., R. 13 W., Group 28, Utah. Thence | |
| | N. 89° 53' W., on true line, between sections 24 and 25. | |
| | Ascend gradual E. slope of rolling bench land, through dense short undergrowth. | |
| 30.20 | Base of abrupt ascent over steep E. face of Blue Mountain, bears N. and S.; enter medium dense timber, bears with base of mountain. | |
| 40.02 | On steep E. slope, 410 ft. above section corner. | |
| | Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked | |
| | $\begin{array}{r} S\ 24 \\ \frac{1}{4} \\ \hline S\ 25 \\ 1957 \end{array}$ | |
| | raise a mound | |
| | of stone, 3 ft. base, 2 ft. high, N. of corner. | |
| | No suitable bearing trees available. | |
| | Thence ascend abrupt NE. slope. | |
| 70.70 | Rocky spur, 980 ft. above the $\frac{1}{4}$ section corner, projects SE.; ascend along steep rocky S. slope. | |
| 76.30 | Head of draw, 50 ft. deep, drains S.; continue along S. slope. | |
| 78.60 | Rocky spur, 1050 ft. above the $\frac{1}{4}$ section corner, projects S.; descend steep SW. slope. | |
| 80.04 | The corner of sections 25, 24, 25, and 26, 70 ft. below spur. | |

SUBDIVISION OF T. 30 S., R. 14 W.

Chains

Land, broken general E. slope of Blue Mountain, and rolling bench land, with a general easterly exposure and drainage. Limestone, quartzite and sandstone formations.

Soil, shallow light colored clay and sand, lying on bedrock; 4th rate on mountains; deep, sandy loam mixed with rock and gravel, 3rd rate on valley land.

Undergrowth, short sage, black and bitter brush, mountain rush, yellowtop and weeds.

Timber, scrub juniper and pinon on W. portion of mile.

Fair grazing land.

N.0°01'W., between sections 23 and 24.

Ascend steep SW. slope of rough mountainous land, through medium dense scrub timber and short undergrowth.

8.80 Rocky spur, 275 ft. above corner, projects S.30°E.; descend steep NE. slope.

13.20 Head of draw, 40 ft. deep, drains NE.; continue descent over NE. slope.

18.10 Steep rocky spur, 130 ft. below last spur, slopes N.15°E.; descend steep NW. slope.

31.20 Draw, 440 ft. below spur, drains N.20°E.; descend along general E. slope.

37.00 Rocky spur, 40 ft. below draw, projects NE.; descend steep N. slope.

40.00 On steep N. slope, 60 ft. below spur.

Set an iron post, 3 ft. long, 1 in. diam., 24 ins. in the ground to solid rock, and in a large mound of stone to top, for $\frac{1}{4}$ section corner, with brass cap marked

$\frac{1}{4}$
 S 23 | S 24
 1937

from which

A pinon, 4 ins. diam., bears N.53°45'E., 80 links distant, marked $\frac{1}{4}$ S24 BT

A pinon, 6 ins. diam., bears N.70°30'W., 30 links distant, marked $\frac{1}{4}$ S23 BT

42.00 Draw, 60 ft. below the $\frac{1}{4}$ section corner, drains E.; ascend abrupt SE. slope.

51.50 Rocky spur, 140 ft. above draw, projects E.; descend steep N. slope.

51.80 An old prospect tunnel, bears N.29°E., about 12.50 chains distant.

59.70 Large main draw, 270 ft. below spur, drains NE.; thence along general E. slope.

62.50 Draw, 10 ft. below last draw, drains E.; ascend steep S. slope.

SUBDIVISION OF T. 30 S., R. 14 W.

Chains

72.50 Spur, 120 ft. above draw, projects N.60°E., and bears S.80°W.; descend steep NE. slope.

77.00 Head of draw, 20 ft. deep, drains NE.; continue descent over NE. slope.

80.00 On gradual NE. slope, 110 ft. below spur.
Set an iron post, 3 ft. long, 2 ins. diam., 10 ins. in the ground, to solid rock, and in a large mound of stone to top, for corner of sections 13, 14, 23, and 24, with brass cap marked

| | |
|------|------|
| T30S | R14W |
| S 14 | S 13 |
| S 23 | S 24 |

1937

A pinon, 5 ins. diam., bears N.68°E., 161 links distant, marked T30S R14W S13 BT from which

A pinon, 8 ins. diam., bears S.72°30'E., 85 links distant, marked T30S R14W S24 BT

A pinon, 3 ins. diam., bears S.26°W., 110 links distant, marked S23 BT

A pinon, 3 ins. diam., bears N.12°45'W., 107 links distant, marked S14 BT

Land, broken general E. slope of blue Mountain. Limestone, quartzite and sandstone formations.

Soil, shallow light colored clay and sand, lying on bedrock; 4th rate.

Undergrowth, sage, black and bitter brush, mountain rush, yellowtop and weeds.

Timber, scrub juniper and pinon.

Fair grazing land.

S.89°53'E., on random line, between sections 13 and 24.

40.00 Set temporary $\frac{1}{4}$ section corner.

80.08 Intersect the E. boundary of the township, 16 links N. of the corner of sections 13, 18, 19, and 24, an iron post, 3 ins. diam., set marked and witnessed as described in the official record of the survey of T. 30 S., R. 13 W., Group 22, Utah.

Thence

N.89°46'W., on true line, between sections 13 and 24.

Ascend gradually over NE. slope of flood plain, through medium dense short undergrowth.

22.00 Top of ascent on flood plain, 130 ft. above corner, bears NE. and SW.; descend gradual NW. slope of flood plain.

24.00 Draw, 15 ft. below top of flood plain, drains NE. at base of blue Mountain, bears N. and S.; enter scattered

SUBDIVISION OF T. 30 S., R. 14 W.

Chains

150.00 Scrub timber, bears with base of mountain; ascend abrupt SE. slope.

39.00 Slope changes from a SE. to a NE. slope.

40.04 On NE. slope, 280 ft. above draw.

Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground to solid rock, and in a large mound of stone to top, for $\frac{1}{4}$ section corner, with brass cap marked

S 13

$\frac{1}{4}$
S 24

1937

alongside

of post, deposit a quartzite, 10x8x6 ins., marked X.

No suitable bearing trees available.

43.30 Enter top of spur, projects SE. and bears W.; thence ascend gradually along top of spur.

47.00 Leave top of spur, projects E. and bears S.80°W.; ascend along NE. slope near top of spur.

66.30 Spur, 340 ft. above the $\frac{1}{4}$ section corner, projects N.; descend abrupt NW. slope.

76.50 Draw, 150 ft. below spur, drains NE.; ascend gradual NE. slope.

80.08 The corner of sections 13, 14, 23, and 24, 90 ft. above draw.

Land, broken E. slope of Blue Mountain. Limestone, quartzite and sandstone formations.

Soil, shallow loose sand and light colored clay, lying on bedrock; 4th rate.

Undergrowth, short sage, black and bitter brush, mountain rush, yellowtop and weeds.

Timber, scrub juniper and pinon.

Fair grazing land.

N.0°01'W., between sections 13 and 14.

Descend NE. slope of general E. face of Blue Mountain, through scattered scrub timber and medium dense short undergrowth.

7.60 Draw, 220 ft. below corner, drains N.60°E.; ascend gradual SE. slope.

12.60 Spur, 60 ft. above draw, projects E.; descend gradual NE. slope.

15.50 Draw, 70 ft. below spur, drains S.60°E.; ascend steep rocky SE. slope.

25.00 Ascent changes from a steep SE. slope to a gradual ascent over broken E. slope.

SUBDIVISION OF T. 30 S. R. 14 W.

Chains

34.00 Spur, 250 ft. above draw, projects E.; descend gradual NE. slope.

40.00 On gradual NE. slope, 50 ft. below spur

Set an iron post, 3 ft. long, 2 in. diam., 30 ins. in the ground, for 1/4 section corner, with brass cap marked

S 14 S 13

1937

from which

A pinon, 6 ins. diam., bears S.48°45'E., 32 links distant, marked 1/4 S13 BT

A juniper, 4 ins. diam., bears N.85°W., 16 links distant, marked 1/4 S14 BT

Thence descend gradually over NE. slope.

52.70 Spur, 80 ft. below the 1/4 section corner, projects N. 30°E., and bears S.15°W.; descend steep NW. slope.

64.50 Draw, 250 ft. below spur, drains N.40°E.; ascend gradual SE. slope.

73.50 Spur, 40 ft. above draw, projects N.60°E.; descend gradual NW. slope.

75.50 Draw, 20 ft. below spur, drains N.80°E., and heads S.70°W., about 8 chains distant; ascend gradual SE. slope.

80.00 On gradual SE. slope, 20 ft. above draw.

Set an iron post, 3 ft. long, 2 in. diam., 30 ins. in the ground, for corner of sections 11, 12, 13, and 14, with brass cap marked

T30S R14W

S 11 S 12

S 14 S 13

1937

from which

A juniper, 6 ins. diam., bears N.82°30'E., 313 links distant, marked T30S R14W S12 BT

A juniper, 6 ins. diam., bears S.58°E., 265 links distant, marked T30S R14W S13 BT

A juniper, 9 ins. diam., bears S.8°30'W., 490 links distant, marked T30S R14W S14 BT

No suitable bearing tree available in section 11.

Land; broken NE. slope of Blue Mountain. Eimestens, quartzite and sandstone formation.

Soil, shallow light colored clay and sand, lying on bedrock; 4th rate.

Undergrowth; short sage, black and bitter brush, mountain rush, yellow top and weeds.

Timber, scrub juniper and pinon.

Fair grazing land.

SUBDIVISION OF T. 30 S., R. 14 W.

Chains

S.89° 46'E., on random line, between sections 12 and 13.

40.00 Set temporary $\frac{1}{4}$ section corner.

80.12 Intersect the E. boundary of the township 7 links N. of the corner of sections 7, 12, 13, and 18, an iron post, 3 ins. diam., set, marked and witnessed as described in the official record of the survey of T. 30 S., R. 13 W., Group 22, Utah.

Corner set at the NW. corner of fences bearing E. and S.
Thence

N.89°45'W., on true line, between sections 12 and 13.

Ascend gradual E. slope of rolling foothills of Blue Mountain, through medium dense short undergrowth.

0.50 Wash, 30 links wide, 3 ft. deep, drains S.10°E.

6.00 Enter flood plain, drains SE. and bears NW. and SE.; thence ascend gradual NE. slope of flood plain.

25.00 Enter medium dense timber, bears NW. and S.

40.06 On gradual NE. slope of flood plain, 180 ft. above section corner.

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked

✓ $\frac{1}{4}$ $\frac{S\ 12}{S\ 13}$
 1937

from which

A juniper, 8 ins. diam., bears S.37°15'E., 369 links distant, marked $\frac{1}{4}$ S13 BT✓

A juniper, 12 ins. diam., bears N.82°30'W., 331 links distant, marked $\frac{1}{4}$ S12 BT✓

63.80 Leave flood plain, and slope changes from a gradual NE. slope to a gradual N. slope, bears N.30°E. and S.30°W.

68.60 Draw, 90 ft. above the $\frac{1}{4}$ section corner, drains NE. at base of Blue Mountain, bears N. and S.; ascend gradual E. slope.

80.12 The corner of sections 11, 12, 13, and 14, 120 ft. above draw.

Land, rolling and mountainous, with a general northeasterly exposure and drainage. Limestone, quartzite, and sandstone formation.

Soil, shallow light colored clay and sand, lying on bedrock; 4th rate.

Undergrowth, sage and bitter brush, mountain rush, yellowtop and weeds.

Timber, scrub juniper and pinon.

Fair grazing land.

SUBDIVISION OF T. 30 S., R. 14 W.

Chains

N.0°01'W., between sections 11 and 12.

Ascend gradual SE. slope of rolling mountainous land, through scattered timber and dense short undergrowth.

5.00 Spur, 25 ft. above corner, projects E.; descend gradually along E. slope.

30.00 Draw, 130 ft. below spur, drains S.70°E.; ascend gradual SE. slope.

32.00 Spur, 60 ft. above draw, projects E. 2 chains distant to end; descend gradual NE. slope.

40.00 At base of Blue Mountain, 55 ft. below spur, bears SE. and NW.

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked

✓
S 11 | S 12
1937

from which

A juniper, 4 ins. diam., bears S.42°W., 91 links distant, marked $\frac{1}{4}$ S11 BT ✓

No other bearing tree available.

Thence descend gradual NE. slope of rolling bench land.

53.20 Wash, 30 lks. wide, 3 ft. deep, in draw, 20 ft. deep, drains N.80°E.

80.00 On rolling NE. slope of bench land, 80 ft. below the $\frac{1}{4}$ section corner, at edge of timber, bears NW. and SE.

Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, for corner of sections 1, 2, 11, and 12, with brass cap marked

✓
T30S R14W
S 2 | S 1
S 11 | S 12
1937

from which

A juniper, 12 ins. diam., bears N.83°45'E., 541 links distant, marked T30S R14W S1 BT ✓

A juniper, 6 ins. diam., bears S.37°50'W., 470 links distant, marked T30S R14W S11 BT ✓

A juniper, 4 ins. diam., bears N.9°30'W., 497 links distant, marked T30S R14W S2 BT ✓

No bearing tree in section 12 available.

Land, rolling NE. slope of Blue Mountain on S. half of mile and rolling bench land on N. half. Limestone, quartzite and sandstone formations.

Soil, shallow light colored clay and sand, lying on bedrock and a heavy clay subsoil; 4th rate.

Undergrowth, sagebrush, mountain rush, yellowtop and weeds.

SUBDIVISION OF T. 30 S., R. 14 W.

Chains

Timber, scrub juniper on S. half mile.

Fair grazing land.

S.89°43'E., on random line, between sections 1 and 12.

40.00 Set temporary $\frac{1}{4}$ section corner.

80.14 Intersect the E. boundary of the township, 3 links N. of the corner of sections 1, 6, 7, and 12, an iron post, 3 ins.diam., set, marked and witnessed as described in the official record of the survey of T. 30 S., R. 13 W., Group 22, Utah.

N.89°42'W., on true line, between sections 1 and 12.

Ascend gradual SE. slope of rolling bench land, through medium dense short undergrowth.

15.00 Old road, bears N. and S.

40.07 On gradual SE. slope of rolling bench land, 60 ft. above section corner.

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked

S 1

$\frac{1}{4}$ ———

S 12

1937

raise a mound of stone, 3 ft. base, 2 ft. high, N. of corner.

Continue gradual ascent over SE. slope of rolling bench.

52.10 Old road, bears NW. and SE.

65.00 Wash, 60 links wide, 3 ft. deep, in draw, 15 feet deep, drains S.55°E.; thence ascend gradual NE. slope.

73.30 Wash, 10 links wide, 3 ft. deep, drains S.60°E.

80.14 The corner of sections 1, 2, 11, and 12, 60 ft. above the $\frac{1}{4}$ section corner.

Land, rolling bench land, with a general southeasterly and northeasterly exposure and drainage.

Soil, deep light colored clay and sand, lying on a heavy clay subsoil; 3rd rate.

Undergrowth, short sagebrush, yellowtop and weeds.

No timber.

Fair grazing land.

N.0°01'W., on a random line, between sections 1 and 2.

40.00 Set temporary $\frac{1}{4}$ section corner.

84.12 Intersect the N. boundary of the township, 20 links W. of the corner of sections 1, 2, 35, and 36, here-

SUBDIVISION OF T. 30 S., R. 14 W.

Chains

tofore described.

Thence

S.0°07'W., on true line, between sections 1 and 2,

Ascend gradual NE. slope of rolling bench land, through dense short undergrowth.

24.00 Swale, 10 ft. deep, drains E.

30.70 Old road, bears N.70°E. and S.70°W.

44.12 On gradual NE. slope, 40 ft. above section corner.

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked

$\frac{1}{4}$
S 2 S 1
1937

raise a

mound of stone, 3 ft. base, 2 ft. high, W. of corner.

64.10 Old road, bears NW. and SE.

76.30 Wash, 100 links wide, 3 ft. deep, in draw, 15 ft. deep, drains S.55°E.; thence ascend gradual N. slope.

81.40 Wash, 30 links wide, 3 ft. deep, drains S.60°E.

84.12 The corner of sections 1, 2, 11, and 12, 30 ft. above the $\frac{1}{4}$ section corner.

Land, rolling bench land, with a general northerly and northeasterly exposure and drainage.

Soil, deep light colored clay and sand, lying on a heavy clay subsoil; 3rd rate.

Undergrowth, short sagebrush, yellowtop and weeds.

No timber.

Fair grazing land.

From the standard corner of sections 34 and 35, on the S. boundary of the township, an iron post, 3 ins. diam., set, marked, and witnessed as described in the official record of the survey of T. 31 S., R. 14 W., Group 2, Utah.

N.0°01'W., between sections 34 and 35.

Ascend gradual SE. slope of rolling foothills of Blue Mountain, through medium dense timber and short undergrowth.

11.80 Spur, 100 ft. above the corner, projects S.70°W., 3 chains distant to end; thence ascend gradually along broken W. slope.

25.70 Head of draw, 70 ft. above spur, drains W.; continue ascent over general W. slope.

SUBDIVISION OF T. 30 S., R. 14 W.

Chains

30.80 Top of ascent, 70 ft. above head of draw, bears E. and W.; descend gradual NW. slope.

40.00 On gradual NW. slope, 40 ft. below top of ascent.

Set an iron post, 3 ft. long, 1 in. diam., 8 ins. in the ground to solid rock, and in a large mound of stone to top, for $\frac{1}{4}$ section corner, with brass cap marked

S 34 | S 35

1937

from which

A cedar, 12 ins. diam., bears N.79°15'E., 41 links distant, marked $\frac{1}{4}$ S 35 BT

A juniper, 8 ins. diam., bears N.63°15'W., 38 links distant, marked $\frac{1}{4}$ S34 BT

41.60 Head of draw, 10 ft. below the $\frac{1}{4}$ section corner, drains SW.; ascend gradual SE. slope.

46.40 Spur, 40 ft. above head of draw, slopes W.; descend gradual NW. slope.

53.50 Base of descent, 40 ft. below spur, bears E. and W.; ascend gradual SW. slope.

59.20 Spur, 70 ft. above base of descent, projects S.80°W.; descend abrupt NW. slope.

65.00 Draw, 160 ft. below spur, drains S.85°W.; ascend abrupt S. slope.

76.70 Rocky spur, 140 ft. above draw, projects S.80°W.; descend gradual NW. slope.

80.00 On gradual NW. slope, 40 ft. below spur.

Set an iron post, 3 ft. long, 2 ins. diam., 20 ins. in the ground to solid rock, and in a large mound of stone to top, for corner of sections 26, 27, 34, and 35, with brass cap marked

T30S R14W

S 27 | S 26

S 34 | S 35

1937

from which

A pinon, 3 ins. diam., bears N.40°30'W., 105 links distant, marked BT

No other bearing trees available.

Land, broken general W. slope of Blue Mountain, with a general southwesterly exposure and drainage. Limestone, quartzite and sandstone formations.

Soil, shallow light colored clay and sand, lying on bedrock; 4th rate.

Undergrowth, sagebrush, mountain rush, yellowtop, and weeds.

Timber, scrub juniper and pinon. Fair grazing land.

SUBDIVISION OF T. 30 S., R. 14 W.

Chains

East, on random line, between sections 26 and 35.

40.00 Set temporary $\frac{1}{4}$ section corner.

79.96 Intersect the N. and S. line, 9 links N. of the corner of sections 25, 26, 35, and 36.

Thence

N.89°56'W., on true line, between sections 26 and 35.

Ascend abrupt broken E. slope of Blue Mountain, through medium dense timber and short undergrowth.

33.70 Head of draw, drains N.80°E.; continue ascent over broken E. slope.

39.98 On abrupt E. slope of Blue Mountain, 540 ft. above section corner.

Set an iron post, 3 ft. long, 1 in. diam., 6 ins. in the ground, to solid rock, and in a large mound of stone to top, for $\frac{1}{4}$ section corner, with brass cap marked

S 26

$\frac{1}{4}$ S 35

1937

from which

A pinon, 15 ins. diam., bears S.34°15'E., 17 links distant, marked $\frac{1}{4}$ S 35 ET

No other suitable bearing tree available.

50.70 Summit of Blue Mountain, 530 ft. above the $\frac{1}{4}$ section corner, bears N.10°W. and S. 10°E.; descend abrupt W. face of mountain.

72.40 Draw, 555 ft. below summit of mountain, drains S.75°W.; ascend abrupt SE. slope.

77.00 Rocky spur, 90 ft. above draw, projects SW. 15 chains distant, thence westerly; descend abrupt ledgy NW. slope.

79.96 The corner of sections 26, 27, 34, and 35, 90 ft. below spur.

Land, broken E. and W. slope of Blue Mountain. Limestone and quartzite formations.

Soil, shallow light colored clay and sand, lying on bedrock; 4th rate.

Undergrowth, sagebrush, mountain rush, yellowtop and grass.

Timber, scrub juniper and pinon.

Fair grazing land.

N.0°01'W., between sections 26 and 27.

Descend abrupt NW. slope of general W. face of Blue Mountain, through scattered timber and short undergrowth.

5.00 Wash, 25 links wide, 10 ft. deep, in draw, 30 ft. below

SUBDIVISION OF T. 30 S., R. 14 W.

Chains

- corner, drains S.70°W.; ascend abrupt SW. slope.
- 40.00 On abrupt SW. slope, 380 ft. above draw.
- Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked
- $\begin{array}{c} \frac{1}{4} \\ \checkmark \text{ S } 27 \text{ S } 26 \\ 1937 \end{array}$
- raise a mound of stone, 3 ft. base, 2 ft. high, W. of corner.
- No suitable bearing trees available.
- 41.50 Small rocky spur, 20 ft. above the $\frac{1}{4}$ section corner, projects S.35°W. about 15 chains distant to base of Blue Mountain; thence along steep W. slope.
- 44.60 Small draw, 10 ft. deep, drains S.30°W.; ascend steep SW. slope.
- 54.80 Spur, 100 ft. above the $\frac{1}{4}$ section corner, slopes W.; descend gradually along W. slope.
- 58.80 Wash, 50 links wide, 10 ft. deep, in draw, 50 ft. below spur, drains S.70°W.; ascend along steep W. slope.
- 71.00 Timber, becomes dense, bears E. and SW.
- 75.00 Spur, 130 ft. above draw, projects S.85°W.; descend gradually along W. slope.
- 80.00 On W. slope, 30 ft. below spur.
- Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, for corner of sections 22, 23, 26, and 27, with brass cap marked

T30S R14W
 $\checkmark \begin{array}{c} \text{S } 22 \text{ S } 23 \\ \text{S } 27 \text{ S } 26 \\ 1937 \end{array}$

from which

A pinon, 3 ins. diam., bears N.30°30'E., 36 links distant, marked BT

A pinon, 3 ins. diam., bears S.45°45'E., 31 links distant, marked BT

A pinon, 6 ins. diam., bears S.79°W., 30 links distant, marked T30S R14W S27 BT ✓

A pinon, 9 ins. diam., bears N.35°W., 19 links distant, marked T30S R14W S22 BT ✓

Land, broken W. face of Blue Mountain. Limestone and quartzite formations.

Soil, shallow light colored clay and sand, lying on bedrock; 4th rate.

Undergrowth, sage and bitter brush, mountain rush, yellowtop and weeds.

Timber, scrub juniper and pinon.

Fair grazing land.

SUBDIVISION OF T. 30 S., R. 14 W.

Chains

S.89°56'E., on random line, between sections 25 and 26.

40.00 Set temporary $\frac{1}{4}$ section corner.

79.92 Intersect the corner of sections 23, 24, 25, and 26.

Thence

N.89°56'W., on true line, between sections 23 and 26.

Descend steep rocky SW. slope of rough mountainous land, on E. face of Blue Mountain, through medium dense timber and undergrowth.

9.80 Draw, 160 ft. below corner, drains S.20°E.; ascend steep broken E. slope.

18.60 Spur, 210 ft. above draw, projects SE.; descend steep W. slope.

29.60 Wash, 20 links wide, 4 ft. deep, in draw, 140 ft. below spur, drains S.60°E.; ascend steep rocky E. slope.

39.96 On abrupt rocky E. slope, 110 ft. above draw.

Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground, to solid rock, and in a large mound of stone to top, for $\frac{1}{4}$ section corner, with brass cap marked

S 23

$\frac{1}{4}$ ———
S 26

1937

from which

A pinon, 15 ins. diam., bears S.30°W., 51 links distant, marked $\frac{1}{4}$ S26 BT ✓

A pinon, 12 ins. diam., bears N.22°30'W., 26 links distant, marked $\frac{1}{4}$ S23 BT ✓

53.00 Summit of Blue Mountain, 300 ft. above the $\frac{1}{4}$ section corner, bears N. and S.; descend abrupt W. face of mountain.

79.92 The corner of sections 22, 23, 26, and 27, 760 ft. below summit of Blue Mountain.

Land, broken E. and W. slopes of Blue Mountain. Limestone, quartzite and sandstone formations.

Soil, shallow light colored clay and sand, lying on bedrock; 4th rate.

Undergrowth, sage and bitter brush, mountain rush, yellowtop and weeds.

Timber, scrub juniper and pinon.

Fair grazing land.

N.0°01'W., between sections 22 and 23.

Descend gradually along steep W. face of Blue Mountain, through medium dense timber and short undergrowth.

8.60 Draw, 50 ft. below corner, drains S.85°W.; ascend

SUBDIVISION OF T. 30 S., R. 14 W.

Chains

gradual SW. slope.

20.20 Top of ridge which forms the divide between the drainage to the NW. and SW., 130 ft. above draw, bears N.80°E. and S.80°W.; descend steep N. slope.

25.80 Wash, 40 links wide, 4 ft. deep, in draw, 170 ft. below ridge, drains W.; ascend gradually along W. slope.


29.40 Top of ascent, 50 ft. above draw, bears E. and W.; descend abrupt N. slope.

33.00 Wash, 30 links wide, 3 ft. deep, in draw, 70 ft. below top of ascent, drains W.; ascend abrupt S. slope.

37.50 Spur, 50 ft. above draw, projects S.70°W.; descend steep N. slope.

40.00 On rocky abrupt N. slope, 80 ft. below spur.

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked



from which

A pinon, 7 ins. diam., bears N.48°15'E., 71 links distant, marked $\frac{1}{4}$ S23 BT

A pinon, 4 ins. diam., bears N.70°W., 47 links distant, marked $\frac{1}{4}$ S22 BT

47.30 Wash, 20 links wide, 5 ft. deep, in draw, 110 ft. below the $\frac{1}{4}$ section corner, drains S.80°W.; ascend steep S. slope.


63.30 Rocky spur, 90 ft. above draw, projects S.80°W.; descend abrupt N. slope.

65.30 Wash, 25 links wide, 5 ft. deep, in draw, 50 ft. below spur, drains W.; ascend steep SW. slope.

72.50 Spur, 70 ft. above draw, projects W.; descend abrupt NW. slope.

80.00 On abrupt densely timbered NW. slope, 200 ft. below spur.

Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, for corner of sections 14, 15, 22, and 23, with brass cap marked



from which

A pinon, 3 ins. diam., bears N.52°E., 45 links distant, marked BT

A pinon, 6 ins. diam., bears S.69°45'E., 18 links distant, marked T30S R14W S23 BT

A juniper, 25 ins. diam., bears S.42°W., 30 links distant, marked T30S R14W S22 BT

A pinon, 3 ins. diam., bears N.20°W., 79 links distant, marked BT

SUBDIVISION OF T. 30 S., R. 14 W.

| Chains | |
|--------|--|
| | Land, broken W. slope of Blue Mountain. Limestone, quartzite and sandstone formation. |
| | Soil, shallow light light colored clay and sand, lying on bedrock; 4th rate. |
| | Undergrowth, sage and bitter brush, mountain rush, yellowtop and weeds. |
| | Timber, scrub juniper and pinon. |
| | Fair grazing land. |
| | S.89°56'E., on random line, between sections 14 and 23. |
| 40.00 | Set temporary $\frac{1}{4}$ section corner. |
| 79.86 | Intersect the N. and S. line, 7 links N. of the corner of sections 13, 14, 23, and 24. |
| | Thence |
| | N.89°53'W., on true line, between sections 14 and 23. |
| | Ascend gradual NE. slope of broken mountainous land, on general E. face of Blue Mountain, through dense timber and short undergrowth. |
| 3.00 | Spur, 20 ft. above corner, projects N.15°E.; descend rocky NW. slope. |
| 7.60 | Wash, 15 links wide, 2 ft. deep, in draw, 80 ft. below spur, drains N.20°E.; ascend rocky N. slope. |
| 16.80 | Wash, 50 links wide, 10 ft. deep, in draw, 65 ft. above last draw, drains N80°E.; ascend steep SE. slope. |
| 38.20 | Rocky spur, 525 ft. above draw, projects NE.; descend steep NW. slope. |
| 39.93 | On NW. slope, 20 ft. below spur. |
| | Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground, to solid rock, and in a large mound of stone to top, for $\frac{1}{4}$ section corner, with brass cap marked |
| | S 14 $\frac{1}{4}$ ————— S 23 1937 |
| | from which |
| | A pinon, 8 ins. diam., bears N.22°E., 18 links distant, marked $\frac{1}{4}$ S14 BT |
| | A juniper, 6 ins. diam., bears S.13°E., 7 links distant, marked BT. Tree too scrubby for other marks. |
| 54.90 | Draw, 160 ft. below the $\frac{1}{4}$ section corner, drains NE.; ascend steep E. slope. |
| 63.80 | Summit of Blue Mountain, 250 ft. above draw, bears S.20°W. and N.10°E. about 10 chains distant to low saddle; descend steep W. slope. |

SUBDIVISION OF T. 30 S., R. 14 W.

Chains

00.00 The corner of sections 14, 15, 22, and 23, 250 ft. below summit of Blue Mountain.
 Land, broken general E. and W. slopes of Blue Mountain, with a general northeasterly and westerly exposure and drainage. Limestone, quartzite and sandstone formations.
 Soil, shallow light colored clay and sand, lying on bedrock; 4th rate.
 Undergrowth, sage and bitter brush, mountain rush, yellowtop and weeds.
 Timber, scrub juniper and pinon.
 Fair grazing land.

N.0°01'W., between sections 14 and 15.

Ascend along steep W. slope of Blue Mountain, through medium dense timber and scattered short undergrowth.

- 2.80 Spur, 10 ft. above corner, projects N.70°W.; descend steep N. slope.
- 11.90 Wash, 35 links wide, 4 ft. deep, in draw, 180 ft. below spur, drains W.; ascend gradually along steep W. slope;
- 24.80 Top of ascent on W. slope, 75 ft. above draw, bears E. and W.; descend gradually along W. slope.
- 40.00 On steep W. slope of Blue Mountain, 135 ft. below top of ascent.

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked



from which

A juniper, 15 ins. diam., bears S57°30'W., 20 links distant, marked $\frac{1}{4}$ S15 BT

A juniper, 28 ins. diam., bears N.77°15'E., 13 links distant, marked $\frac{1}{4}$ S14 BT

- 45.00 Base of descent, 80 ft. below the $\frac{1}{4}$ section corner, bears E. and W.; ascend gradually along steep W. slope.
- 52.40 Spur, 40 ft. above base of descent, slopes W.; descend gradually along W. slope.
- 65.70 Wash, 35 links wide, 2 ft. deep, in draw, 150 ft. below spur, drains N.80°W.; ascent steep SW. slope.
- 71.80 Spur, 115 ft. above draw, projects N.65°W., about 8 chains distant to end; descend gradually along W. slope.
- 80.00 On steep W. slope of Blue Mountain, 40 ft. below spur,

SUBDIVISION OF T. 30 S., R. 14 W.

Chains

Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground to solid rock, and in a large mound of stone to top, for corner of sections 10, 11, 14, and 15, with brass cap marked

T30S R14W

S 10 | S 11

S 15 | S 14

1937.

from which

A pinon, 14 ins. diam., bears N.26°E., 175 links distant, marked T30S R14W S11 BT

A pinon, 13 ins. diam., bears S.37°30'E., 32 links distant, marked T30S R14W S14 BT

A juniper, 12 ins. diam., bears S.33°15'W., 108 links distant, marked T30S R14W S15 BT

A juniper, 15 ins. diam., bears N.5°15'W., 183 links distant, marked T30S R14W S10 BT

Land, rough and mountainous, with a general northwesterly exposure and drainage. Limestone, quartzite and sandstone formations.

Soil, shallow loose sand and clay, lying on bedrock; 4th rate.

Undergrowth, sage and bitter brush, mountain rush, yellowtop and weeds.

Timber, scrub, juniper and pinon.

Fair grazing land.

S.89°53'E., on random line, between sections 11 and 14.

40.00 Set temporary 1/4 section corner.

79.84 Intersect the N. and S. line, 2 links N. of the corner of sections 11, 12, 13, and 14.

Thence

N.89°52'W., on true line, between sections 11 and 14.

Ascend steep SE. slope of broken mountainous land, through dense timber and medium dense short undergrowth.

17.60 Rocky spur, 385 ft. above corner, projects N.40°E.; about 10 chains distant to high rocky point; descend steep NW. slope.

29.30 Base of descent, 140 ft. below spur, bears N. and S.; ascend steep rocky NE. slope.

37.90 Small rocky spur, 120 ft. above base of descent, projects N.20°E.; descend steep rocky NW. slope.

39.92 On steep rocky NW. slope, 50 ft. below spur.

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for 1/4 section corner, with brass cap marked

S 11

SUBDIVISION OF T. 50 S., R. 14 W.

Chains

$$\frac{1}{2} \frac{S 11}{S 14}$$
 1937

from which

A pinon, 3 ins. diam., bears N.59°E., 176 links distant, marked BT

A pinon, 3 ins. diam., bears S.14°E., 95 links distant, marked BT

42.70 Draw, 80 ft. below the $\frac{1}{2}$ section corner, drains N. 2 chains distant, thence NE.; ascend steep E. slope.

52.20 Rocky spur, 140 ft. above draw, projects NE., about 15 chains distant to end; descend steep NW. slope.

59.30 Draw, 40 ft. below spur, drains NE.; ascend steep rocky NE. slope.

68.50 The E. rim of summit of Blue Mountain, 800 ft. above draw, bears N.10°W. and S.30°W., about 10 chains distant, thence S.; thence across rolling top of Blue Mountain.

74.50 The W. rim of summit of Blue Mountain, bears N.10°W., and S.30°W. 10 chains distant, thence S.; descend abrupt rocky W. slope.

79.84 The corner of sections 10, 11, 14, and 15, 200 ft. below summit of Blue Mountain.

Land, broken E. and W. slopes of Blue Mountain. Limestone, quartzite and sandstone formations.

Soil, shallow loose sand and clay, lying on bedrock; 4th rate.

Undergrowth, sage and bitter brush, mountain rush, yellowtop and weeds.

Timber, scrub juniper and pinon.

Fair grazing land.

N.0°01'W., between sections 10 and 11.

Descend gradually along steep W. slope of Blue Mountain, through scattered timber and dense short undergrowth.

19.70 Timber becomes dense, bears E. and SW.

37.70 Wash, 10 links wide, 3 ft. deep, in draw, 250 ft. below corner, drains W.; timber becomes scattered, bears NW. and SE.; ascend gradually along steep rocky W. slope.

40.00 On steep rocky W. slope, 20 ft. above draw.

Set an iron post, 3 ft. long, 1 in. diam., 15 ins. in the ground to solid rock, and in a large mound of stone to top, for $\frac{1}{2}$ section corner, with brass cap marked

$$\frac{1}{2} \frac{S10|S11}{1937}$$

from which

A pinon, 8 ins. diam., bears N.50°45'E., 126 links distant, marked $\frac{1}{2}$ S11 BT

A juniper, 4 ins. diam., bears N.16°W., 101 links distant, marked $\frac{1}{2}$ S10 BT

55.60 Wash, 20 links wide, 3 ft. deep, in draw, 80 ft. below the $\frac{1}{2}$ section corner, drains N.85°W.; ascend along W. slope.

SUBDIVISION OF T. 30 S., R. 14 W.

Chains

- 59.60 Small spur, 110 ft. above draw, projects W. about 6 chains distant, thence N.; descend gradually along W. slope.
- 80.00 On gradual W. slope, 110 ft. below spur.
Set an iron post, 3 ft. long, 2 in. diam., 10 ins. in the ground to solid rock, and in a large mound of stone to top, for corner of sections 2, 3, 10 and 11, with brass cap marked

T30S R14W
 S 3 | S 2
 S10 | S11
 1937

from which

- A pinon, 8 ins. diam., bears N.72°15'E., 50 links distant, marked T30S R14W S2 BT
- A juniper, 6 ins. diam., bears S.35°45'E., 81 links distant, marked BT. Tree too scrubby for other marks.
- A pinon, 6 ins. diam., bears S.35°45'W., 99 links distant, marked S10 BT. Tree too scrubby for other marks.
- A pinon, 7 ins. diam., bears N.65°30'W., 91 links distant, marked T30S R14W S3 BT

Land, broken W. Slope of Blue Mountains. Limestone, volcanic and quartzite formations.

Soil, shallow loose sand and clay, lying on bedrock; 4th rate.

Undergrowth, sage and bitter brush, mountain rush, yellowtop and weeds.

Timber, scrub juniper and pinon.

Fair grazing land.

S.89°52'E., on random line, between sections 2 and 11.

40.00 Set temporary 1/4 section corner.

79.82 Intersect the N. and S. line, 7 links N. of the corner of sections 1, 2, 11, and 12.

Thence

N.89°49'W., on true line between sections 2 and 11.

Over low rolling hills, through scattered scrub timber and dense short undergrowth.

30.00 Wash, 30 links wide, 7 feet deep, drains N.30°E., 1 chain distant to junction with draw draining S.70°E.

35.00 Begin gradual ascent over E. slope, bears N. and S.

39.01 On gradual E. slope, 30 ft. above section corner.

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for 1/4 section corner, with brass cap marked

1/4 $\frac{S 2}{S 11}$
 1937

from which

A juniper, 7 ins. diam., bears N.64°30'E., 1.86 chs. distant, marked 1/4 S 2 BT

A juniper, 4 ins. diam., bears S.28°15'W., 2.88 chs. distant, marked 1/4 S11 BT

SUBDIVISION OF T. 30 S., R. 14 W.

Chains

- 47.80 Small rocky spur, 100 ft. above the $\frac{1}{4}$ section corner, projects N.; descend abrupt W. slope.
- 51.00 Wash, 10 links wide, 2 ft. deep, in draw, 40 ft. below spur, drains N.30°E.; ascend gradual NE. slope.
- 67.70 Spur, 120 ft. above draw, projects N.10°E., about 15 chains distant to end; thence across gradual N. slope.
- 77.70 Summit of Blue Mountain, 5 ft. above spur, bears S. and N. about 30 chains distant to the N. end of mountain; descend gradual rocky W. slope.
- 79.82 The corner of sections 2, 3, 10, and 11, 10 ft. below summit of Blue Mountain.
- Land, low rolling hills, with a general easterly exposure and drainage. Limestone and volcanic formations.
- Soil, shallow loose sand and clay, lying on bedrock; 4th rate.
- Undergrowth, sage and bitter brush, mountain rush, yellowtop and weeds.
- Timber, scrub juniper and pinon.
- Fair grazing land.
-
- N.0°07'E., on random line, bet. secs. 2 and 3.
- 40.00 Set temp. $\frac{1}{4}$ sec. corner.
- 85.82 Intersect the N. bdy. of the township, 3 links E. of the corner of secs. 2, 3, 34, and 35, heretofore described.
- Thence
- S.0°06'W., on true line, between sections 2 and 3.
- Descend gradual S. slope of rolling mountainous land, through medium dense timber and short undergrowth.
- 1.00 Wash, 30 links wide, 3 ft. deep, in draw, 15 ft. below corner, drains N.80°E.; ascend steep rocky N. slope.
- 13.10 Spur, 150 ft. above draw, projects W.; descend steep S. slope.
- 18.40 Wash, 15 links wide, 2 ft. deep, in draw, 80 ft. below spur, drains S.15°W.; descend gradually along W. slope.
- 31.20 Spur, 55 ft. below draw, projects SW.; descend steep S. slope.
- 43.82 On steep rocky S. slope, 100 ft. below spur.
- Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ sec. corner, with brass cap marked
- $\frac{1}{4}$
S3|S2
1937
- from which
- A juniper, 6 ins. diam., bears N85°30'E., 164 links distant, marked $\frac{1}{4}$ S2 BT
- A juniper, 17 ins. diam., bears S.36°W., 43 links distant, marked $\frac{1}{4}$ S3 BT
- 44.50 Wash, 15 links wide, 2 ft. deep, in draw, 10 ft. below the $\frac{1}{4}$ sec. cor. cor., drains E.; ascend steep NE. slope.
- 44.70 Dim road, bears N.85°E., and S.85°W.
- 48.00 Low spur, 35 ft. above draw, projects N.80°E.; descend steep SE. slope.
- 50.90 Wash, 30 links wide, 3 ft. deep, in draw, 40 ft. below spur, drains N.75°E.; ascend gradually along W. slope.
- 52.60 Dim road, bears N.75°E. and S.25°W.
- 83.82 The cor. of secs. 2, 3, 10, and 11, 170 ft. above wash.
- Land, low rolling hills, with a general northeasterly exposure and drainage. Limestone and volcanic formation.

SUBDIVISION OF T. 30 S., R. 14 W.

Chains

Soil, shallow loose sand and clay, lying on bedrock or a heavy clay subsoil; 4th rate.
 Undergrowth, sage and bitter brush, mountain rush, yellow top and weeds.
 Timber, scrub juniper and pinon.
 Fair grazing land.

From the standard corner, of secs. 33 and 34, on the S. bdy. of the township, an iron post, 3 ins. diam., set, marked and witnessed as described in the official record of the survey of T. 31 S., R. 14 W., Group 2, Utah.

N.0°02'W., between sections 33 and 34.

Over rolling bench land, through scattered timber and short undergrowth.

7.30 Dim road, bears NE. and SW.

22.80 Dim road, bears N.50°E. and S.30°W.

40.00 On gradual SW. slope, 40 ft. above section corner.

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked

$\frac{1}{4}$
 S33|S34
 1937

from which

A pinon, 6 ins. diam., bears S.75°E., 55 links dist., mkd BT. Tree too scrubby for other marks.

A pinon, 12 ins. diam., bears N.89°W., 37 links dist., Mkd $\frac{1}{4}$ S33 BT

52.00 Low spur, 30 ft. above the $\frac{1}{4}$ sec. corner, projects SW.; ascend gradually along rolling W. slope.

80.00 On gradual W. slope, 20 ft. above spur.

Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for corner of sections 27, 28, 33, and 34, with brass cap marked

T30S R14W
 S28|S27

S33|S34
 1937

from which

A pinon, 6 ins. diam., bears N.22°15'E., 55 links dist., mkd BT. Tree too scrubby for other marks.

A pinon, 14 ins. diam., bears S.2°45'E., 127 links dist., marked T30S R14W S34 BT

A juniper, 15 ins. diam., bears S.69°45'W., 37 links dist., marked T30S R14W S33 BT

A pinon, 11 ins. diam., bears N.27°W., 52 links dist., marked T30S R14W S28 BT.

Land, rolling, with a general southwesterly exposure and drainage.

Soil, deep loose sand and light colored clay, lying on a heavy clay subsoil; 3rd rate.

Undergrowth, sagebrush, yellowtop and weeds.

Timber, scrub juniper and pinon.

Fair grazing land.

East, on random line, between sections 27 and 34.

40.00 Set temp. $\frac{1}{4}$ sec. corner.

79.96 Intersect the N. and S. line, 7 lks. S. of the corner of sections 26, 27, 34 and 35.

Thence N.89°57'W., on true line, between sections 27 and 34.

SUBDIVISION OF T. 30 S. R. 14 W.

Chains

Descend gradual NW. slope of rolling mountainous land, through medium dense scrub timber and short undergrowth.

5.00 Draw, 80 ft. below corner, drains W. from N.60°E.; thence along bottom of draw.

28.00 Leave bottom of draw, 140 ft. below section corner, drains SW. from the E.; ascend gradual SE. slope of rolling hills.

35.00 Spur, 50 ft. above draw, projects SW.; descend gradual NW. slope.

39.80 Draw, 40 ft. below spur, drains SW.; thence over rolling bench land.

39.98 On NW. edge of draw.

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked

$\frac{1}{4}$ $\frac{\$ 27}{S 34}$
 1937

from which

A pinon, 18 ins. diam., bears N.37°E., 37 links distant, marked $\frac{1}{4}$ S 27 BT

A pinon, 10 ins. diam., bears S.62° 30'E., 22 links distant, marked $\frac{1}{4}$ S 34 BT

52.00 Draw, 40 ft. deep, drains SW.

55.00 Spur, 40 ft. high, projects SW.; descend gradual W. slope.

62.80 Draw, 80 ft. below spur, drains S.; ascend gradual E. slope.

68.00 Spur, 50 ft. above draw, projects S.20°W.; descend gradual W. slope.

79.96 The corner of sections 27, 28, 33, and 34, 80 ft. below spur.

Land, low rolling hills, with a general southwesterly exposure and drainage.

Soil, shallow loose sand and clay, lying on a heavy clay subsoil; 4th rate.

Undergrowth, sagebrush, mountain rush, yellowtop, and weeds.

Timber, scrub juniper and pinon.

Fair grazing land.

N.0° 02'W., between sections 27 and 28.

Ascend gradually along W. slope of rolling mountainous land, through medium dense timber and short undergrowth.

22.00 Top of ascent on W. slope, 50 ft. above corner, bears

SUBDIVISION OF T. 30 S., R. 14 W.

Chains

E. and slopes W. 10 chains distant, to draw draining SW.; descend gradually along W. slope.

28.70 Dim road, bears NE. and SW.

29.70 Draw, 20 feet below top of ascent, drains SW.; ascend gradually along E. slope.

40.00 In bottom of shallow sandy swale, drains S. 15° E. 50 feet above draw.

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked

\uparrow
 S 28 | S 27
 1937

from which

A pinon, 6 ins. diam., bears N. 80° 45' E., 83 links distant, marked $\frac{1}{4}$ S 27 BT

A pinon, 6 ins. diam., bears S. 61° 45' W., 80 links distant, marked $\frac{1}{4}$ S 28 BT

Thence ascend gradual SW. slope.

59.00 Timber becomes scattered, bears E. and W.

67.00 Spur, 240 feet above the $\frac{1}{4}$ section corner, projects SW. about 25 chains distant, thence S.; descend gradual NW. slope, through medium dense timber.

80.00 In bottom of same swale as at the $\frac{1}{4}$ section corner, 70 feet below spur, drains SW., about 20 chains distant, thence SE.

Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, for corner of sections 21, 22, 27, and 28, with brass cap marked

T30S R14W
 S 21 | S 22
 S 28 | S 27
 1937

from which

A pinon, 5 ins. diam., bears N. 67° 45' E., 31 links distant, marked T30S R14W S22 BT

A juniper, 6 ins. diam., bears S. 55° 30' E., 113 links distant, marked T30S R14W S27 BT

A pinon, 12 ins. diam., bears S. 8° 30' W., 131 links distant, marked T30S R14W S28 BT

A pinon, 8 ins. diam., bears N. 59° 15' W., 191 links distant, marked BT. Tree too scrubby for other marks.

Land, rolling and mountainous, with a general southerly exposure and drainage.

Soil, shallow loose sand and clay, lying on a heavy clay subsoil; 4th rate.

Undergrowth, sage and bitter brush, mountain rush, yellowtop and weeds.

SUBDIVISION OF T. 30 S., R. 14 W.

Chains

Timber, scrub juniper and pinon.
Fair grazing land.

S. 89° 57' E., on a random line, between sections 22 and 27.

40.00 Set temporary $\frac{1}{4}$ section corner.

79.88 Intersect the N. and S. line, 3 links S. of the corner of sections 22, 23, 26, and 27.

Thence

N. 89° 58' W., on a true line, between sections 22 and 27.

Descend abrupt W. slope of general W. face of Blue Mountain, through scattered scrub timber and medium dense undergrowth.

2.20 Descent becomes gradual, bears N. and S.

7.70 Descent changes from a gradual W. slope to an abrupt NW. slope.

14.10 Draw, 220 feet below corner, drains SW.; ascend gradual SE. slope.

18.40 Spur, 30 feet above draw, projects SW.; descend abrupt NW. slope.

31.40 Swale, 120 feet below spur, drains SW.; ascend gradual SE. slope.

39.94 On gradual SE. slope, 30 feet above swale.

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked

S 22
 $\frac{1}{4}$ ———
S 27
1937

from which

A juniper, 6 ins. diam., bears S. 35 links distant, marked $\frac{1}{4}$ S 27 B T

A pinon, 6 ins. diam., bears N. 18° W., 36 links distant, marked $\frac{1}{4}$ S 22 B T

42.00 Small draw, 15 feet deep, drains SW.

52.50 Spur, 40 feet above the $\frac{1}{4}$ section corner, slopes S.; descend along gradual S. slope.

56.50 Slope changes from a gradual S. slope to a steep NW. slope.

63.50 Draw, 140 feet below spur, drains S. 30° W.; ascend gradual SE. slope.

76.00 Spur, 120 feet, above draw, projects S. 20° W.; descend gradual NW. slope.

79.88 The corner of sections 21, 22, 27, and 28, 60 feet below spur.

SUBDIVISION OF T. 30 S., R. 14 W.

Chains

Land, broken and mountainous, with a general southwesterly exposure and drainage. Limestone and quartzite formations.

Soil, shallow light colored clay and sand, lying on bedrock; 4th rate.

Undergrowth, sage and bitter brush, mountain rush, yellowtop and weeds.

Timber, scrub juniper and pinon.

Fair grazing land.

N.0°02'W., between sections 21 and 22.

Descend abrupt NW. slope of broken mountainous land, through medium dense timber and short undergrowth.

1.40 Small depression, 10 feet below corner, drains SE.; ascend gradual SE. slope.


7.10 Top of ascent on E. slope, 75 feet above depression, bears NW. and SE.; descend gradual NE. slope.

9.90 Bottom of same swale as at the section corner, 30 feet below top of ascent, drains SE.; ascend steep SW. slope over slide rock and through scattered timber, bears NE. and SW.

29.10 Top of divide ridge, 360 feet above swale, bears E. and W.; low pass in ridge, bears E. about 40 chains distant; descend abrupt N. slope.

40.00 On abrupt N. slope, 260 feet below ridge.

Set an iron post, 3 feet long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked



from which

A pinon, 8 ins. diam., bears S.77°E., 30 links distant, marked $\frac{1}{4}$ S 22 BT

A pinon, 8 ins. diam., bears N.63°30'W., 14 links distant, marked $\frac{1}{4}$ S 21 BT

50.00 Base of abrupt descent over N. slope, and enter dense timber, bears N.80°W. and S.80°E.; thence descend gradual N. slope.

65.00 Wash, 50 links wide, 3 feet deep, in large wide draw, 230 feet below the $\frac{1}{4}$ section corner, drains N.75°W.; ascend gradual SW. slope.

67.90 Top of ascent, on W. slope of knoll, 30 feet above draw, bears E. and W.; descend gradual NW. slope.

72.30 Recross wash in draw, 50 feet below top of ascent, drains NE.; ascend gradual SE. slope.

76.40 Top of ascent on E. slope of knoll, 40 feet above wash, bears E. and W.; descend along steep E. slope.

SUBDIVISION OF T. 30 S., R. 14 W.

Chains

80.00 On steep E. slope, 60 feet below top of ascent.

Set an iron post, 3 feet long, 2 ins. diam., 25 ins. in the ground, to solid rock, and in a large mound of stone to top, for corner of sections 15, 16, 21, and 22, with brass cap marked

| | |
|-----------|------|
| T30S R14W | |
| S 16 | S 15 |
| S 21 | S 22 |
| 1937 | |

from which

A pinon, 15 ins. diam., bears N.22°E., 57 links distant, marked T30S R14W S15 BT

A juniper, 8 ins. diam., bears S.29°30'E., 92 links distant, marked T30S R14W S22 BT

A pinon, 12 ins. diam., bears S.33°W., 66 links distant, marked T30S R14W S21 BT

A juniper, 18 ins. diam., bears N.43°15'W., 34 links distant, marked T30S R14W S16 BT

Land, broken and mountainous, with a general southerly and northerly exposure and drainage. Limestone and volcanic formations.

Soil, shallow light colored clay, with a rocky surface, lying on bedrock; 4th rate.

Undergrowth, sage and bitter brush, mountain rush, yellowtop, and weeds.

Timber, scrub juniper and pinon.

Fair grazing land.

S.89° 58'E., on a random line, between sections 15 and 22.

40.00 Set temporary $\frac{1}{2}$ section corner.

79.98 Intersect the N. and S. line, 2 links N. of the corner of sections 14, 15, 22, and 23.

Thence

N.89° 57'W., on a true line, between sections 15 and 22.

Descend gradual NW. slope of broken mountainous land, through medium dense timber and undergrowth.

2.30 Small gulch near head, 40 feet below corner, drains N.; ascend gradual NE. slope.

8.40 Top of ascent, 30 feet above gulch, bears N. and S.; descend gradually along N. slope.

22.00 Bottom of swale, 200 feet below top of ascent, drains N.20°W.; ascend gradual NE. slope, through dense timber.

32.50 Enter top of spur, projects W. from the SE; thence ascend gradually along top of spur.

39.98 On top of spur, projects W. from the E., 70 feet above swale.

SUBDIVISION OF T. 30 S., R. 14 W.

Chains

Set an iron post, 3 feet long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked

S 15

$\frac{1}{4}$ ——— /

S 22

1937

from which

A pinon, 5 ins. diam., bears N.37° 15'E., 38 links distant, marked $\frac{1}{4}$ S 15 BT

A pinon, 6 ins. diam., bears S.17° 30'E., 13 links distant, marked $\frac{1}{4}$ S 22 BT

- 43.30 Leave top of spur, 45 feet above the $\frac{1}{4}$ section corner, projects N. from the E.; descend steep SW. slope.
- 58.00 Draw, 200 feet below spur, drains N.20°W.; ascend gradual E. slope.
- 63.00 Small swale near head, drains N.70°E.
- 70.60 Top of rise, 240 feet above draw, bears N. and SE. about 12 chains distant to top of knoll; descend steep rocky W. slope.
- 77.10 Limestone ledge, 15 feet high, bears N. and S. and faces W.
- 79.60 Draw, 100 feet below top of rise, drains N.; ascend steep E. slope.
- 79.96 The corner of sections 15, 16, 21, and 22, 20 feet above draw.

Land, broken and mountainous, with a general northwesterly exposure and drainage. Limestone and volcanic formations.

Soil, shallow light colored clay, with a rocky surface, lying on bedrock; 4th rate.

Undergrowth, sage and bitter brush, mountain rush, yellowtop and weeds.

Timber, scrub juniper and pinon.

Fair grazing land.

N.0° 02'W., between sections 15 and 16.

Descend abrupt E. slope of broken mountainous land, through dense timber and short undergrowth.

- 2.60 Small swale, 20 feet below corner, drains E. 50 links distant, to junction with draw draining northerly; ascend gradual S. slope.
- 7.90 Spur, 30 feet above swale, projects SE.; descend gradual NE. slope.
- 13.40 Small draw, 40 feet below spur, drains NE.; ascend gradual SE. slope.
- 17.30 Rocky spur, 30 feet above draw, projects NE. about 80 chains distant to end; descend gradual NE. slope.

SUBDIVISION OF T. 30 S., R. 14 W.

Chains

- 22.50 Draw, 40 feet below spur, drains NE.; ascend gradual rocky SE. slope.
- 28.50 Rocky spur, 50 feet above draw, projects N. from the SW.; thence along top of spur.
- 34.90 Leave top of spur, projects NE. from the S.; descend gradual NW. slope.
- 40.00 On gradual NW. slope, 60 feet below spur.
- Set an iron post, 3 feet long, 1 in. diam., 30 ins in the ground, for $\frac{1}{4}$ section corner, with brass cap marked

$$\begin{array}{c} \frac{1}{4} \\ \text{S } 16 \frac{1}{4} \text{ S } 15 \\ 1937 \end{array}$$

from which

A juniper, 9 ins. diam., bears S.48°E., 15 links distant, marked $\frac{1}{4}$ S 15 BT.

A juniper, 7 ins. diam., bears N.75°W., 35 links distant, marked $\frac{1}{4}$ S 16 BT.

- 48.60 Dim road, bears NE. and SW.; thence over nearly level land.
- 50.90 Wash, 30 links wide, 2 feet deep, drains NE.
- 79.20 Bend in wash, 15 links wide, 5 feet deep, drains SE. from the SW.
- 80.00 On rolling land,
- Set an iron post, 3 feet long, 2 ins. diam., 30 ins. in the ground, for corner of sections 9, 10, 15, and 16, with brass cap marked

$$\begin{array}{c} \text{T30S R14W} \\ \text{S } 9 \frac{1}{2} \text{ S } 10 \\ \text{S } 16 \frac{1}{4} \text{ S } 15 \\ 1937 \end{array}$$

from which

A pinon, 18 ins. diam., bears N.50° 30'E. 383 links distant, marked T30S R14W S10 BT.

A juniper, 12 ins. diam., bears S.50° 15'E. 107 links distant, marked T30S R14W S15 BT.

A juniper, 12 ins. diam., bears S.75°30'W. 179 links distant, marked T30S R14W S16 BT.

No suitable bearing tree available in section 9.

Land, low rolling hills, with a general northeasterly exposure and drainage. Limestone and volcanic formations.

Soil, shallow loose sand and clay, with a rocky surface, lying on bedrock; 4th rate.

Undergrowth, sage and bitter brush, mountain rush, yellowtop and weeds.

Timber, scrub juniper and pinon.

Fair grazing land.

SUBDIVISION OF T. 30 S., R. 14 W.

| Chains | |
|--------|--|
| | S.89° 57'E., on a random line, between sections 10 and 15. |
| 40.00 | Set temporary $\frac{1}{4}$ section corner. |
| 79.96 | Intersect the N. and S. line, 14 links S. of the corner of sections 10, 11, 14, and 15. |
| | Thence |
| | S.89° 57'W., on a true line, between sections 10 and 15. |
| | Descend gradual W. slope of rolling mountainous land, through medium dense timber and short undergrowth. |
| 26.00 | Sandy wash, 40 links wide, 3 feet deep, drains N. |
| 34.40 | Sandy wash, 30 links wide, 3 feet deep, drains N. |
| 39.98 | On rolling W. slope, 260 feet below section corner. |
| | Set an iron post, 3 feet long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked |
| | $\begin{array}{r} S\ 10 \\ \frac{1}{4} \text{ ---} \\ S\ 15 \\ 1937 \end{array}$ |
| | from which |
| | A juniper, 7 ins. diam., bears N.10° 30'E. 16 links distant, marked $\frac{1}{4}$ S 10 BT |
| | A juniper, 7 ins. diam., bears S.49° 30'W., 106 links distant, marked $\frac{1}{4}$ S 15 BT |
| 40.80 | Low spur, 30 feet high, projects N. from SE.; descend gradual SW. slope. |
| 44.00 | Base of descent, 30 feet below top of spur, bears N. and S.; ascend gradual E. slope. |
| 49.00 | Top of rocky knoll, 50 feet high; descend gradual W. slope of knoll. |
| 56.80 | Sandy wash, 50 links wide, 4 feet deep, in draw, 75 feet below top of knoll, drains N.30°E.; ascend gradual E. slope over nearly level land. |
| 61.30 | Dim road, bears N.30°E. and S.30°W. |
| 79.96 | The corner of sections 9, 10, 15, and 16, 75 feet above draw. |
| | Land, rolling and mountainous, with a general northerly exposure and drainage. Limestone and volcanic formations. |
| | Soil, shallow loose sand and clay, lying on bedrock; 4th rate. |
| | Undergrowth, sage and bitter brush, mountain rush, yellowtop and weeds. |
| | Timber, scrub juniper and pinon. |
| | Fair grazing land. |

SUBDIVISION OF T. 30 S., R. 14 W.

Chains

N.0° 02'W., between sections 9 and 10.

Ascend gradually along general E. slope of rolling mountainous land, through medium dense timber and short undergrowth.

8.70 Small draw, drains E.

13.30 Top of ascent on low wide rise, 30 feet above corner, slopes E. and bears W.; descend gradually along E. slope.

24.30 Swale, 30 feet deep, drains E.

40.00 On general E. slope, 70 feet below top of rise.

Set an iron post, 3 feet long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked

$$\begin{array}{c} \uparrow \\ S \ 9 \ | \ S \ 10 \\ 1937 \end{array}$$

from which

A juniper, 5 ins. diam., bears S.52°E., 16 links distant, marked BT. Tree too scrubby for other marks.

A pinon, 5 ins. diam., bears S.78° 30'W., 76 links distant, marked $\frac{1}{4}$ S 9 BT

Continue over rolling land.

76.60 Small swale, drains E.

80.00 On gradual E. slope, 40 feet below the $\frac{1}{4}$ section corner.

Set an iron post, 3 feet long, 2 ins. diam., 30 ins. in the ground, for corner of sections 3, 4, 9, and 10, with brass cap marked

$$\begin{array}{c} T30S \ R14W \\ S \ 4 \ | \ S \ 3 \\ S \ 9 \ | \ S \ 10 \\ 1937 \end{array}$$

from which

A pinon, 7 ins. diam., bears N.31° 45'E., 70 links distant, marked T30S R14W S3 BT

A pinon, 8 ins. diam., bears S.32° 30'E., 90 links distant, marked T30S R14W S10 BT

A pinon, 10 ins. diam., bears S.68° 15'W., 117 links distant, marked T30S R14W S9 BT

A juniper, 6 ins. diam., bears N.31°W. 31 links distant, marked T30S R14W S4 BT

Land, rolling low hills, with a general northeasterly exposure and drainage. Limestone and volcanic formation.

Soil, shallow loose sand and clay, lying on bedrock; 4th rate

Undergrowth, sage and bitter brush, mountain rush, yellowtop and weeds.

SUBDIVISION OF T. 30 S., R. 14 W.

Chains

Timber, scrub juniper and pinon.

Fair grazing land.

N. 89° 57' E., on a random line, between sections 3 and 10.

40.00 Set temporary 1/4 section corner.

79.82 Intersect the N. and S. line 19 links N. of the corner of sections 2, 3, 10, and 11.

Thence

N. 89° 55' W., on a true line, between sections 3 and 10.

Descend gradually over W. slope of Blue Mountain, through medium dense timber and short undergrowth.

2.80 Spur, 15 feet above corner, projects N.; descend gradual NW. slope of Blue Mountain.

7.00 Wash at base of Blue Mountain, 120 feet below top, 50 links wide, 4 feet deep, drains N.; thence ascend gradual E. slope of rolling bench land.

11.00 Dim road, bears N. and S. 30° W.

39.91 On general E. slope, 90 feet above wash.

Set an iron post, 3 feet long, 1 in. diam., 30 ins. in the ground, for 1/4 section corner, with brass cap marked

S 3
1/4 ———
S 10
1937

from which

A juniper, 10 ins. diam., bears N. 60° 30' E. 60 links distant, marked 1/4 S 3 B T

A pinon, 10 ins. diam., bears S. 5° W. 82 links distant, marked 1/4 S 10 B T

Continue gradual ascent over rolling E. slope.

79.82 The corner of sections 3, 4, 9, and 10, 130 feet above the 1/4 section corner.

Land, rolling low hills, with a general easterly and northwesterly exposure and drainage. Limestone and volcanic formation.

Soil, shallow loose sand and light colored clay, lying on bedrock; 4th rate.

Undergrowth, short sage and bitter brush, mountain rush, yellowtop and weeds.

Timber, scrub juniper and pinon.

Fair grazing land.

N. 0° 06' E., on a random line, between sections 3 and 4.

SUBDIVISION OF T. 30 S., R. 14 W.

Chains

- 40.00 Set temporary $\frac{1}{4}$ section corner.
- 83.93 Intersect the N. boundary of the township, 23 links E. of the corner of sections 3, 4, 33, and 34, heretofore described.
- Thence
- S.0° 04'E., on a true line, between sections 3 and 4.
- Ascend gradual NE. slope of rolling mountainous land, through medium dense timber and short undergrowth.
- 28.90 Top of ascent, 70 feet above corner, bears NE. and SW.; thence over rolling land.
- 43.93 On rolling land, 25 feet below top of ascent.
- Set an iron post, 3 feet long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked

\uparrow
 S 4 | S 3
 1937

from which

A pinon, 12 ins. diam., bears S.84°E. 202 links distant, marked $\frac{1}{4}$ S 3 B T

A pinon, 8 ins. diam., bears S.89°W., 57 links distant, marked $\frac{1}{4}$ S 4 B T

Continue over series of very small spurs and swales draining easterly.

- 83,93 The corner of sections 3, 4, 9, and 10, 50 feet below the $\frac{1}{4}$ section corner.

Land, low rolling hills, with a general northeasterly and easterly exposure and drainage. Limestone and volcanic formations.

Soil, shallow light colored clay and sand, lying on bedrock; 4th rate.

Undergrowth, sage and bitter brush, mountain rush, yellowtop and weeds.

Timber, scrub and juniper pinon.

Fair grazing land.

From the standard corner of sections 32 and 33, on the S. boundary of the township, an iron post, 3 ins. diam. set, marked and witnessed as described in the official record of the survey of T. 31 S., R. 14 W., Group 2, Utah.

N.0° 03'W., between sections 32 and 33.

Ascend gradually over general SW. slope of rolling mountainous land, through medium dense timber and short undergrowth.

- 4.50 Draw, drains SE. 1 chain distant, thence S.
- 7.70 Recross draw, drains SW. 1 chain distant, thence S.15°E.

SUBDIVISION OF T. 30 S., R. 14 W.

- Chains
- 11.70 Recross draw, SE. 1 chain distant, thence southerly.
 - 15.00 Low spur, 30 feet above corner, projects S.30°E.; descend gradual NE. slope.
 - 34.80 Wash, 100 links wide, 2 feet deep, in main draw, 50 feet below spur, drains S.30°E.
 - 39.20 Dim road, bears NW. and SE.
 - 40.00 On rolling land, 15 feet above draw.
- Set an iron post, 3 feet long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked

$\frac{1}{4}$
 S 32 | S 33
 1937

raise a mound
of stone, 3 feet base, 2 feet high, W. of corner.
No suitable bearing trees available.

- 61.30 Spur, 100 feet above the $\frac{1}{4}$ section corner, projects SW.; descend gradual NW. slope.
- 64.00 Draw, 20 feet below spur, drains SW.; ascend gradual SW. slope.
- 76.60 Spur, 90 feet above draw, projects SW.; continue gradual ascent over SW. slope.
- 80.00 On gradual SW. slope, 10 feet above spur.

Set an iron post, 3 feet long, 2 ins. diam., 30 ins. in the ground, for corner of sections 28, 29, 32, and 33, with brass cap marked

T30S R14W
 S 29 | S 28
 S 32 | S 33
 1937

from which

- A pinon, 6 ins. diam., bears N.16°E. 109 links distant, marked T30S R14W S28 BT
- A pinon, 8 ins. diam., bears S.67° 30'E., 119 links distant, marked T30S R14W S33 BT
- A pinon, 14 ins. diam., bears S.53° 30'W., 196 links distant, marked T30S R14W S32 BT
- A juniper, 6 ins. diam., bears N.55° 30'W. 62 links distant, marked T30S R14W S29 BT

Land, rolling and mountainous with a general southwesterly exposure and drainage.

Soil, deep clay and sand lying on a hard clay subsoil and bedrock; 4th rate.

Undergrowth, sage and bitter brush, mountain rush, yellowtop and weeds.

Timber, scrub juniper and pinon.

Fair grazing land.

SUBDIVISION OF T. 30 S., R. 14 W.

Chains

East, on a random line, between sections 28 and 33..

40.00 Set temporary $\frac{1}{4}$ section corner.

80.06 Intersect the N. and S. line, 7 links S. of the corner of sections 27, 28, 33, and 34.

Thence

S.89° 57' W., on a true line, between sections 28 and 33.

Descend gradually over rolling mountainous land, through medium dense scrub timber and scattered undergrowth.

1.70 Wash, 20 links wide, 1 ft. deep, in draw, 20 feet below corner; drains S.15°E.; ascend gradual SE. slope.

3.60 Dim road, bears S.15°E. and N.15°W.

9.60 Spur, 55 feet above draw, projects S.; descend gradual SW. slope.

14.20 Draw, 30 feet below spur, drains S.15°E.; ascend gradual E. slope.

15.60 Spur, 20 feet high, projects S.15°E.

19.00 Draw, 40 feet deep, drains S.20°E.; ascend gradual SE. slope.

23.30 Spur, 90 feet above draw, projects S.20°E.; descend gradual SW. slope.

29.40 Head of draw, 30 feet below spur, drains S.30°E.; ascend gradual E. slope.

32.10 Spur, 50 feet above head of draw, projects S.; descend gradual NW. slope.

40.03 On gradual NW. slope, 110 feet below spur.

Set an iron post, 3 feet long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked

S 28

$\frac{1}{4}$ S 33
1937

from which

A juniper, 15 ins. diam., bears S.63°W. 157 links distant, marked $\frac{1}{4}$ S 33 BT

A pinon, 12 ins. diam., bears N.20° 15' W. 28 links distant, marked $\frac{1}{4}$ S 28 BT

40.90 Draw, 10 feet below corner, drains S.; ascend gradual SE. slope.

46.20 Spur, 40 feet above draw, projects S.; descend gradual SW. slope.

49.40 Draw, 40 feet below spur, drains S.; ascend gradual E. slope.

55.10 Spur, 60 feet above draw, projects SW.; descend gradual NW. slope.

63.10 Draw, 125 feet below spur, drains SW.; ascend gradual SE. slope.

SUBDIVISION OF T. 30 S., R. 14 W.

Chains

- 69.70 Spur, 60 feet above draw, projects S.; descend gradual E. slope.
- 73.60 Draw, 70 feet below spur, drains S.; ascend gradual E. slope.
- 78.00 Spur, 90 feet above draw, projects S. 2 chains distant, thence SW.; descend gradual SW. slope.
- 80.06 The corner of sections 28, 29, 32, and 33, 25 feet below spur.

Land, rolling and mountainous, with a general southerly exposure and drainage.

Soil, loose sand and clay lying on bedrock or a heavy clay subsoil; 4th rate.

Undergrowth, sage and bitter brush, mountain rush, yellowtop and weeds.

Timber, scrub juniper and pinon.

Fair grazing land.

N.0° 03'W., between sections 28 and 29.

Ascend gradual SW. slope of rolling mountainous land, through medium dense timber and scattered short undergrowth.

- 1.30 Spur, 10 feet above corner, projects W.; descend gradual NW. slope.
- 12.20 Draw, 65 feet below spur, drains SW.; ascend gradual SE. slope.
- 28.00 Bend in spur, 160 feet above draw, projects S.10°W. and bears N.20°W.; descend gradual NE. slope.
- 40.00 On gradual NE. slope, 30 feet below spur.

Set an iron post, 3 feet long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{2}$ section corner, with brass cap marked

$\frac{1}{2}$
 S 29 S 28
 1937

from which

A juniper, 8 ins. diam., bears S.24°30'E. 16 links distant, marked $\frac{1}{2}$ S 28 B T

A pinon, 14 ins. diam., bears N.87° 30'W. 50 links distant, marked $\frac{1}{2}$ S 29 B T

- 68.80 Draw, 20 feet below the $\frac{1}{2}$ section corner, drains S.30°E.; ascend gradual SW. slope.
- 64.50 Recross draw, drains S.20°W.; ascend gradual SE. slope.
- 71.50 Spur, 120 feet above draw, projects S.20°W.; thence ascend gradually along broken SW. slope.
- 78.00 Spur, 30 feet above last spur, projects SW. 2 chains distant to end; descend gradual N. slope.

SUBDIVISION OF T. 30 S., R.14 W.

Chains

80.00 At head of draw, 10 feet below spur, drains SW.

Set an iron post, 3 feet long, 2 ins. diam., 12 ins. in the ground to solid rock, and in a mound of stone to top, for corner of sections 20, 21, 28, and 29, with brass cap marked

| | |
|-----------|------|
| T30S R14W | |
| S 20 | S 21 |
| S 29 | S 28 |
| 1937 | |

from which

A juniper, 8 ins. diam., bears N.50° 45'E., 81 links distant, marked T30S R14W S21 BT

A juniper, 10 ins. diam., bears S.72°E. 77 links distant, marked T30S R14W S28 BT

A juniper, 12 ins. diam., bears S.67° 30'W., 51 links distant, marked T30S R14W S 29 BT

A juniper, 12 ins. diam., bears N.74° 45'W. 65 links distant, marked T30S R14W S 20 BT

Land, rolling and mountainous, with a general southerly exposure and drainage.

Soil, deep clay and sand lying on a heavy clay subsoil; 4th rate.

Undergrowth, sage and bitter brush, mountain rush, yellowtop, and weeds.

Timber, scrub juniper and pinon.

Fair grazing land.

N.89° 57'E., on a random line, between sections 21 and 28.

40.00 Set temporary $\frac{1}{4}$ section corner.

80.14 Intersect the N. and S. line, 12 links N. of the corner of sections 21, 22, 27, and 28.

Thence

N.89° 58'W., on a true line, between sections 21 and 28.

Ascend gradual SE. slope of rolling mountainous land, through dense timber and scattered undergrowth.

21.10 Spur, 160 feet above corner, projects S.; descend rocky SW. slope.

31.00 Draw, 120 feet below spur, drains S.20°E.; ascend gradual NE. slope.

40.07 On gradual NE. slope, 180 feet above draw.

Set an iron post, 3 feet long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked

| |
|-------------------|
| S 21 |
| $\frac{1}{4}$ ——— |
| S 28 |
| 1937 |

from which

SUBDIVISION OF T. 30 S., R. 14 W.

Chains

entire

A pinon, 10 ins. diam., bears S. 26° 15' W. 183 links distant, marked $\frac{1}{4}$ S 28 BT

A juniper, 8 ins. diam., bears N. 57° W. 49 links distant, marked $\frac{1}{4}$ S 21 BT

43.40 Spur, 50 feet above the $\frac{1}{4}$ section corner, projects S. 30° descend steep rocky SW. slope.

59.50 Timber becomes more dense, bears NE. and SW.

65.00 Draw, 350 feet below spur, drains S. 30° W.; ascend gradual SE. slope.

68.80 Spur, 15 feet above draw, projects SW.; descend gradual NW. slope.

73.30 Draw, 40 feet below spur, drains S.; descend gradually along S. slope.

77.50 Spur, 30 feet above draw, projects S. 30° W.; descend gradual NW. slope.

80.14 The corner of sections 20, 21, 28, and 29, 10 feet below spur.

Land, rolling and mountainous, with a general southerly exposure and drainage. Volcanic formation.

Soil, deep and shallow loose sand and clay, lying on a heavy clay subsoil; 4th rate.

Undergrowth, sage and bitter brush, mountain rush, yellowtop and weeds.

Timber, scrub juniper and pinon.

Fair grazing land.

N. 0° 03' W., between sections 20 and 21.

Ascend gradual SW. slope of rolling mountainous land, through dense timber and scattered short undergrowth.

7.70 Spur, 50 feet above corner, projects SW.; descend gradual NW. slope.

11.90 Draw, 30 feet below spur, drains S. 30° W.; ascend gradual SW. slope.

28.60 Head of draw, 20 feet deep, drains SW.

34.30 Spur, 150 feet above draw, projects W.; descend gradually along W. slope.

40.00 On gradual W. slope, 20 feet below spur.

Set an iron post, 3 feet long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked

$\frac{1}{4}$
S 20 | S 21
1937

from which

A pinon, 8 ins. diam., bears N. 59° 45' E., 55 links distant, marked $\frac{1}{4}$ S 21 BT

SUBDIVISION OF T. 30 S., R. 14 W.

Chains

A juniper, 6 ins. diam., bears N.82° 30'W. 36 links distant, marked $\frac{1}{4}$ S 20 BT

50.00 Head of draw, 20 feet below the $\frac{1}{4}$ section corner, drains SW.; ascend steep SW. slope.

53.00 Spur, 40 feet above head of draw, projects SW. about 5 chains distant to end; descend gradual NW. slope.

58.20 Draw near head, 70 feet below spur, drains W.; ascend steep SW. slope.

60.40 Spur, 50 feet above draw, projects N.75°W.; descend gradual NW. slope.

80.00 On gradual NW. slope, 90 feet below spur.

Set an iron post, 3 feet long, 2 ins. diam., 30 ins. in the ground, for corner of sections 16, 17, 20, and 21, with brass cap marked

| | |
|-----------|------|
| T30S R14W | |
| S 17 | S 16 |
| S 20 | S 21 |
| 1937 | |

from which

A pinon, 6 ins. diam., bears N.47° 30'E., 58 links distant, marked T30S R14W S16 BT

A juniper, 12 ins. diam., bears S.25°E. 55 links distant, marked T30S R14W S21 BT

A pinon, 14 ins. diam., bears S.4° 30'W. 54 links distant, marked T30S R14W S 20 BT

A juniper, 10 ins. diam., bears N.22° 30'W., 25 links distant, marked T30S R14W S 17 BT

Land, rolling and mountainous, with a general southwesterly exposure and drainage. Volcanic formation.

Soil, deep and shallow loose sand and clay, mixed with gravel, lying on a heavy clay subsoil; 4th rate.

Undergrowth, sage and bitter brush, mountain rush, yellowtop and weeds.

Timber, scrub juniper and pinon.

Fair grazing land.

S.89° 58'E., on a random line, between sections 16 and 21.

40.00 Set temporary $\frac{1}{4}$ section corner.

80.16 Intersect the N. and S. line, 7 links S. of the corner of sections 15, 16, 21, and 22.

Thence

S.89° 59'W., on a true line, between sections 16 and 21.

Ascend steep NE. slope of broken mountainous land, through dense timber and scattered short undergrowth.

SUBDIVISION OF T. 30 S., R. 14 W.

| Chains | |
|--------|--|
| 3.20 | Spur, 110 feet above corner, projects N.; ascend gradually along N. slope. |
| 12.60 | Spur, 160 feet above corner, projects SE.; thence ascend gradually along S. slope. |
| 15.70 | Top of ascent on S. slope of peak, 10 feet above spur, slopes S. and bears N. about 10 chains distant to top of peak; descend gradual NW. slope. |
| 20.30 | Head of draw, 80 feet below top of ascent, drains N.40°; continue gradual descent over NW. slope. |
| 33.50 | Large main draw, 100 feet below top of ascent, drains N. ascend gradual NE. slope. |
| 40.08 | On gradual NE. slope, 30 feet above draw. |
| | Set an iron post, 3 feet long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked |
| | $\begin{array}{r} S\ 16 \\ \frac{1}{4} \text{ ---} \\ S\ 21 \\ 1937 \end{array}$ |
| | from which |
| | A pinon, 6 ins. diam., bears N. 46 links distant, marked $\frac{1}{4}$ S 16 BT |
| | A pinon, 8 ins. diam., bears S.35° 30'W. 45 links distant, marked $\frac{1}{4}$ S 21 BT |
| 49.40 | Top of divide ridge, 70 feet above the $\frac{1}{4}$ section corner, bears N.20°W. and S.20°E.; descend gradual NW. slope. |
| 80.16 | The corner of sections 16, 17, 20, and 21, 70 feet below ridge. |
| | Land, rolling and mountainous, with a general northeasterly and northwesterly exposure and drainage. Limestone and volcanic formations. |
| | Soil, shallow and deep sand and gravel, lying on bedrock and a heavy clay subsoil; 4th rate. |
| | Undergrowth, sage and bitter brush, mountain rush, yellowtop and weeds. |
| | Timber, scrub juniper and pinon. |
| | Fair grazing land. |
| | N.0° 03'W., between sections 16 and 17. |
| | Descend gradual NW. slope of rolling mountainous land, through dense timber and scattered short undergrowth. |
| 19.90 | Old road in draw, 60 feet below section corner, drains W.; road bears E. and W.; ascend gradual SW. slope. |
| 40.00 | On gradual SW. slope, 105 feet above draw. |
| | Set an iron post, 3 feet long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked |

SUBDIVISION OF T. 30 S., R. 14 W.

Chains

$\frac{1}{4}$
 S 17 | S 16 ✓
 1937

from which

A juniper, 4 ins. diam., bears S.70°E. 33 links distant, marked $\frac{1}{4}$ S 16 BT ✓

A juniper, 16 ins. diam., bears S.88°W. 17 links distant, marked $\frac{1}{4}$ S 17 BT ✓

47.20 Ridge, 30 feet above the $\frac{1}{4}$ section corner, bears NW. and S.30°E.; descend gradual NE. slope.

53.20 Head of draw, 30 feet below ridge, drains SE.; ascend gradual SE. slope.

63.20 Recross top of ridge, 20 feet above draw, bears N.30°E. and S.30°W.; descend gradual NW. slope.

68.20 Draw, 20 feet below ridge, drains SW.; ascend gradual broken S. slope.

80.00 On top of low spur, 30 feet above draw, projects S.30°E.

Set an iron post, 3 feet long, 2 ins. diam., 30 ins. in the ground, for corner of sections 8, 9, 16, and 17, with brass cap marked

T30S R14W
 S 8 | S 9
 S 17 | S 16
 1937

from which

A pinon, 8 ins. diam., bears N.24° 30'E. 83 links distant, marked T30S R14W S 9 BT

A pinon, 8 ins. diam., bears S.46°E. 88 links distant, marked T30S R14W S 16 BT

A pinon, 12 ins. diam., bears S.30° 30'W. 31 links distant, marked T30S R14W S 17 BT

A pinon, 10 ins. diam., bears N.52°W. 34 links distant, marked T30S R14W S 8 BT

Land, rolling and mountainous, with a general southerly exposure and drainage. Limestone and volcanic formations.

Soil, shallow and deep, clay and sand, lying on bedrock and a heavy clay subsoil; 4th rate.

Undergrowth, sage and bitter brush, mountain rush, yellowtop and weeds.

Timber, scrub juniper and pinon.

Fair grazing land.

N.89°59'E., on a random line, between sections 9 and 16.

40.00 Set temporary $\frac{1}{4}$ section corner.

80.18 Intersect the N. and S. line, 3 links S. of the corner of sections 9, 10, 15, and 16.

SUBDIVISION OF T. 50 S., R. 14 W.

| Chains | Thence |
|--------|--|
| | S. 89° 58' W., on a true line, between sections 9 and 16. |
| | Ascend gradual SE. slope of rolling mountainous land, through scattered timber and dense short undergrowth. |
| 5.40 | Timber becomes dense and ascent abrupt, bears NE. and S. |
| 15.20 | Spur, 180 feet above corner, projects SE.; continue ascent over SE. slope. |
| 32.60 | Head of draw, 20 feet deep, drains S. 30° E.; continue ascent over SE. slope. |
| 36.20 | Spur, 500 feet above corner, projects S. 30° E.; thence ascend gradually over SE. slope. |
| 40.09 | On gradual SE. slope, 30 feet above spur. |
| | Set an iron post, 3 feet long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked |
| | $\begin{array}{r} S\ 9 \\ \frac{1}{4} \\ \hline S\ 16 \\ 1937 \end{array}$ |
| | from which |
| | A pinon, 10 ins. diam., bears S. 45° W. 148 links distant, marked $\frac{1}{4}$ S 16. BT |
| | A pinon, 6 ins. diam., bears N. 50° W. 74 links distant, marked $\frac{1}{4}$ S 9 BT |
| 45.70 | Head of draw, 20 feet deep, drains S. 20° E.; continue ascent over SE. slope. |
| 50.10 | Limestone spur, 90 feet above the $\frac{1}{4}$ section corner, projects S.; descend steep broken SW. slope. |
| 50.40 | Limestone ledge, faces W. and bears N. and S. |
| 64.20 | Small draw, 10 feet deep, drains S. 15° E. |
| 71.20 | Ridge, 305 feet below spur, bears N. 20° E. and S. 20° W.; continue descent over SW. slope. |
| 77.20 | Draw, 10 feet below ridge, drains S. 30° E.; ascend gradual SE. slope. |
| 80.18 | The corner of sections 8, 9, 16, and 17, 30 feet above draw. |
| | Land, rolling and mountainous, with a general southerly exposure and drainage. Limestone and volcanic formations. |
| | Soil, shallow and deep loam sand and clay, lying on bedrock and a heavy clay subsoil; with |
| | Undergrowth, sage and hit brush, main rush, yellowtop and weeds. |
| | Timber, scrub juniper and pinon. |
| | Fair grazing land. |

SUBDIVISION OF T. 30 S., R. 14 W.

Chains

- 0.00 $N.0^{\circ} 05' W.$, between sections 8 and 9.
- Descend gradual NE. slope of rolling mountainous land, through dense timber and medium dense short undergrowth.
- 6.00 Draw, 20 feet below spur, drains SE.; ascend gradual SW. slope.
- 16.70 Spur, 80 feet above draw, projects SW. about 8 chains distant, thence SE.; descend gradual NW. slope.
- 25.70 Draw, 30 feet below spur, drains $S.20^{\circ} W.$; ascend gradual SE. slope.
- 40.00 On gradual SE. slope, 80 feet above draw.

Set an iron post, 3 feet long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked

$\frac{1}{4}$
 S 8 | S 9
 1937

from which

A juniper, 8 ins. diam., bears $S.83^{\circ} E.$ 28 links distant, marked $\frac{1}{4}$ S 9 BT

A juniper, 10 ins. diam., bears $N.84^{\circ} 30' W.$ 29 links distant, marked $\frac{1}{4}$ S 8 BT

- 53.10 Spur, 130 feet above the $\frac{1}{4}$ section corner, projects $S.30^{\circ} W.$; thence ascend gradual SW. slope.
- 58.10 Recross top of spur, 150 feet above the $\frac{1}{4}$ section corner, projects $S.15^{\circ} E.$; descend gradual NE. slope.
- 70.50 Draw, 30 feet below spur, drains SE.; ascend steep SE. slope.
- 77.20 Spur, 110 feet above draw, projects $S.20^{\circ} E.$; continue abrupt ascent over SE. slope.
- 80.00 On steep SE. slope, 20 feet above spur.

Set an iron post, 3 feet long, 2 ins. diam., 18 ins. in the ground to solid rock, and in a large mound of stone to top, for corner of sections 4, 5, 8, and 9, with brass cap marked

T30S R14 W
 S 5 | S 4
 S 8 | S 9
 1937

from which

A pinon, 6 ins. diam., bears $N.41^{\circ} E.$ 52 links distant, marked T30S R14W S4 BT

A juniper, 12 ins. diam., bears $S.16^{\circ} 30' E.$ 106 links distant, marked T30S R14W S9 BT

A pinon, 8 ins. diam., bears $S.52^{\circ} 30' W.$ 73 links distant, marked T30S R14W S8 BT

A juniper, 10 ins. diam., bears $N.27^{\circ} 30' W.$ 21 links distant, marked T30S R14W S5 BT

Land, rolling and mountainous, with a general southerly exposure and drainage. Limestone and volcanic formations.

SUBDIVISION OF T. 30 S. R. 14 W.

| Chains | |
|--------|--|
| | <p>Soil, shallow and deep clay and sand, lying on bedrock and a heavy clay subsoil; 4th rate.</p> <p>Undergrowth, sage and bitter brush, mountain wash, yellowtop and weeds.</p> <p>Timber, scrub juniper and pinon.</p> <p>Fair grazing land.</p> |
| | <p>N.89° 58'E., on a random line, between sections 4 and 9.</p> |
| 40.00 | Set temporary $\frac{1}{2}$ section corner. |
| 80.20 | Intersect the N. and S. line, 7 links N. of the corner of sections 3, 4, 9, and 10. |
| | Thence |
| | N.89° 59'W., on a true line, between sections 4 and 9. |
| | Ascend gradual E. slope of rolling mountainous land, through dense timber and scattered short undergrowth. |
| 10.20 | Base of abrupt ascent over NE. slope, bears N. and S. |
| 28.70 | Rocky spur, 530 feet above corner, projects S.25°E.; descend steep SW. slope. |
| 40.10 | In bottom of draw, 110 feet below spur, drains S.30°E. |
| | Set an iron post, 3 feet long, 1 in. diam., 6 ins. in the ground, to solid rock, and in a large mound of stone to top, for $\frac{1}{2}$ section corner, with brass cap marked |
| | <p>S 4</p> <p>$\frac{1}{2}$ —</p> <p>S 9</p> <p>1937</p> |
| | from which |
| | A pinon, 6 ins. diam., bears S.31°E. 293 links distant, marked $\frac{1}{2}$ S 9 BT |
| | A juniper, 8 ins. diam., bears N.82°W. 147 links distant, marked $\frac{1}{2}$ S 4 BT |
| 57.40 | Top of divide ridge, 360 feet above the $\frac{1}{2}$ section corner, bears N. and S.; descend gradual SW. slope. |
| 59.50 | Small prospect tunnel, bears S. 60 links distant. |
| 66.40 | Draw, 150 feet below ridge, drains SW.; ascend gradual SE. slope. |
| 70.80 | Spur, 20 feet above draw, projects S.20°W.; ascend SW. slope. |
| 74.40 | Draw, 60 feet below spur, drains S.20°W.; ascend SE. slope. |
| 80.20 | The corner of sections 4, 5, 8, and 9, 45 feet above draw. |
| | Land, rolling and mountainous, with a general southeasterly and southwesterly exposure and drainage. |

SUBDIVISION OF T. 30 S., R. 14 W.

Chains

Soil, shallow clay and sand, lying on bedrock; 4th rate.

Undergrowth, sage and bitter brush, mountain rush, yellowtop and weeds.

Timber, scrub juniper and pinon.

Fair grazing land.

N.0° 05'W., on a random line, between sections 4 and 5.

40.00 Set temporary $\frac{1}{4}$ section corner.

83.75 Intersect the N. boundary of the township, 17 links W. of the corner of sections 4, 5, 32, and 33, heretofore described.

Thence

S.0° 02'W., on a true line, between sections 4 and 5.

Descend gradual E. slope of rolling mountainous land, through dense timber and scattered short undergrowth.

3.65 Wash, 25 links wide, 5 feet deep, in draw, 20 feet below corner, drains NE.; road in wash, bears NE. and SW.; ascend gradual NW. slope.

21.60 Ascent becomes abrupt, bears NE. and SW.

43.75 On abrupt NW. slope, 820 feet above draw.

Set an iron post, 3 feet long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked

↑
S 5 | S 4
1937

from which

A pinon, 6 ins. diam., bears N.34°E. 68 links distant, marked $\frac{1}{4}$ S 4 BT

A pinon, 14 ins. diam., bears S.85°W. 33 links distant, marked $\frac{1}{4}$ S 5 BT

51.30 Ascent becomes more gradual, bears N.30°E. and S.30°W.

53.10 The top of a high densely timbered peak, bears E. about 8.50 chains distant.

63.40 Divide ridge, 190 feet above the $\frac{1}{4}$ section corner, bears E. and W. about 8 chains distant to a low saddle in ridge; descend gradually along broken W. slope.

76.00 Spur, 80 feet below ridge, projects S.30°W.; descend gradual E. slope.

83.75 The corner of sections 4, 5, 8, and 9, 185 feet below spur.

Land, rolling and mountainous, with a general north-westerly and southwesterly exposure and drainage. Limestone and volcanic formations.

Soil, shallow and deep loose clay and sand, with a rocky surface; 4th rate.

SUBDIVISION OF T. 30 S., R. 14 W.

Chains

Undergrowth, sage and bitter brush, mountain rush, yellowtop and weeds.

Timber, scrub juniper and pinon.

Fair grazing land.

From the standard corner of sections 31 and 32 on the S. boundary of the township, an iron post, 3 ins. diam. set, marked, and witnessed as described in the official record of the survey of T. 31 S., R. 14 W., Group 2, Utah.

N.0° 03'W., between sections 31 and 32.

Over rolling mountainous land, through medium dense timber and undergrowth.

- 18.70 Draw, 25 feet deep, drains S.30°E.
- 30.10 Old road, bears N.15°W. and S.15°E.
- 38.70 Sandy wash, 30 links wide, 3 feet deep, drains S.15°E.
- 40.00 On SW. slope, 80 feet above section corner.

Set an iron post, 3 feet long, 1 in. diam. 20 ins. in the ground, to solid rock, and in a mound of stone to top, for section corner, with brass cap marked



from which

A pinon, 6 ins. diam., bears N.79° 15'E. 97 links distant, marked † S 32 BT

A juniper, 6 ins. diam., bears S.67° 15'W., 32 links distant, marked † S 31 BT

- 42.60 Small draw, 15 feet deep, drains S.70°W.
- 49.70 Low spur, 30 feet high, projects SE.
- 52.60 Begin gradual descent over NE. slope, bears NW. and SE.
- 57.60 Wash, 20 links wide, 3 feet deep, 40 feet below spur, drains SE.; ascend gradual SW. slope.
- 70.00 Spur, 70 feet above wash, projects SE.; descend gradual NE. slope.
- 80.00 On gradual NE. slope, near bottom of swale, draining SE. 20 feet below spur.

Set an iron post, 3 feet long, 2 ins. diam., 30 ins. in the ground, for corner to sections 29, 30, 31, and 32, with brass cap marked



from which

SUBDIVISION OF T. 30 S., R. 14 W.

Chains

- A juniper, 12 ins. diam., bears N.26°E., 96 links distant, marked T30S R14W S. 29 BT
- A juniper, 10 ins. diam., bears S.36°E., 25 links distant, marked T30S R14W S 32 BT
- A juniper, 10 ins. diam., bears S.18°W., 41 links distant, marked T30S R14W S 31 BT
- A juniper, 10 ins. diam., bears N.16°W., 119 links distant, marked T30S R14W S 30 BT

Land, low rolling hills with a general southerly exposure and drainage.

Soil, deep and shallow loose sand and clay, lying on a heavy clay subsoil; 4th rate.

Undergrowth, sage and bitter brush, mountain rush, yellowtop, Russian thistle and weeds.

Timber, scrub juniper and pinon.

Fair grazing land.

East, on a random line, between sections 29 and 32.

40.00 Set temporary $\frac{1}{2}$ section corner.

80.00 Intersect the N. and S. line, 5 links N. of the corner of sections 28, 29, 32, and 33.

Thence

N.89° 58'W., on a true line, between sections 29 and 32.

Descend gradual SW. slope of rolling mountainous land, through medium dense timber and short undergrowth.

10.00 Draw, 110 feet below corner, drains SW.; ascend gradual SE. slope.

14.70 Spur, 40 feet above draw, projects SW. 2 chains distant to end; descend steep W. slope.

19.00 Dlm road, bears N.15°W. and S.15°E.

26.00 Draw, 50 feet below spur, drains S.; ascend gradual E. slope.

40.00 On top of spur, 200 feet above draw, projects S.30°E.

Set an iron post, 3 feet long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{2}$ section corner, with brass cap marked

S 29
 $\frac{1}{2}$ —————
 S 32
 1937

from which

A juniper, 10 ins. diam., bears S.17°W., 6 links distant, marked $\frac{1}{2}$ S 32 BT

A juniper, 12 ins. diam., bears N.55° 45'W., 94 links distant, marked $\frac{1}{2}$ S 29 BT

SUBDIVISION OF T. 30 S., R. 14 W.

Chains

- 48.20 Swale, drains S. about 5 chains distant to junction with next swale.
- 56.00 Swale, drains S. 60° E.; ascend gradual NE. slope.
- 71.00 Low spur, 40 feet above swale, projects SE.; descend gradual SW. slope.
- 79.00 Sandy wash, 20 links wide, 3 feet deep, drains SE.
- 80.00 The corner of sections 29, 30, 31, and 32.

Land, low rolling hills, with a general southeasterly exposure and drainage.

Soil, deep and shallow loose sand and clay, lying on a heavy clay subsoil; 4th rate.

Timber, scrub juniper and pinon.

Fair grazing land.

West, on a random line, between sections 30 and 31.

- 40.00 Set temporary $\frac{1}{4}$ section corner.

- 80.02 Intersect the W. boundary of the township, 7 links S. of the corner of sections 25, 30, 31, and 36, heretofore described.

Thence

S. 89° 57' E., on a true line, between sections 30 and 31.

Ascend gradually along rolling S. slope of mountainous land, through medium dense timber and short undergrowth.

- 3.50 Spur, 15 feet above corner, slopes S.; descend gradual E. slope.

- 25.60 Old wood road, bears N. and SE.

- 27.80 Wash, 50 links wide, 4 feet deep, in draw, 85 feet below spur, drains S. 30° E.; ascend gradual W. slope.

- 40.02 On top of spur, 70 feet above draw, slopes S. 10° E.

Set an iron post, 3 feet long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked

S. 30
 $\frac{1}{4}$ ———
 S 31
 1937

from which

A pinon, 24 ins. diam., bears S. 26° W. 120 links distant, marked $\frac{1}{4}$ S 31 BT

A pinon, 15 ins. diam., bears N. 3° W. 38 links distant, marked $\frac{1}{4}$ S 30 BT

Thence descend gradual E. slope.

- 47.10 Old road, bears N. 10° W. and S. 10° E.

- 50.30 Wash, 10 links wide, 3 feet deep, drains S. 70° E.,

SUBDIVISION OF T. 30 S., R. 14 W.

Chains

- 2 chains distant, thence S.35°E.
- 54.70 Wash, 8 links wide, 2 feet deep, 35 feet below the $\frac{1}{4}$ section corner, drains S.35°E.; ascend gradual SW. slope.
- 65.10 Top of ascent, 70 feet above wash, bears N. and S.; descend gradual SE. slope.
- 80.02 The corner of sections 29, 30, 31, and 32, 60 feet below top of ascent.
- Land; rolling and mountainous; with a general southeasterly exposure and drainage.
- Soil, shallow and deep loose sand and clay, lying on a heavy clay subsoil; 4th rate.
- Undergrowth; sage and bitter brush, mountain rush, yellowtop, Russian thistle and weeds.
- Timber, scrub juniper and pinon.
- Fair grazing land.
-
- N.0° 03'W., between sections 29 and 30.
- Over low rolling mountainous land, through medium dense scrub timber and short undergrowth.
- 0.90 Sandy wash, 30 links wide, 2 feet deep, drains SE.
- 5.30 Low spur, 30 feet high, projects SE.
- 10.30 Swale, 30 feet deep, drains SE.
- 20.80 Low spur, 40 feet high, projects SE.; descend gradual NE. slope.
- 35.70 Swale, 75 feet below spur, drains SE. from the west.
- 40.00 On rolling land.
- Set an iron post, 3 feet long, 1 in. diam., 20 ins. in the ground to solid rock, and in a large mound of stone to top, for $\frac{1}{4}$ section corner, with brass cap marked
- $\frac{1}{4}$
 S 30 | S 29
 1937
- from which
- A pinon, 14 ins. diam., bears N.85° 15'W. 61 links distant, marked $\frac{1}{4}$ S 29 BT.
- A juniper, 12 ins. diam., bears S.30° 15'W. 15 links distant, marked $\frac{1}{4}$ S 30 B T.
- 41.50 Spur, 40 feet high, projects S.60°E.
- 68.30 Wash, 30 links wide, 4 feet deep, drains SE.; ascend steep rocky SE. slope.
- 72.60 Spur, 80 feet above wash, projects E.; from this point a windmill, at an old well, bears N.29°W. about 40 chains distant; descend gradual NE. slope.
- 80.00 On gradual NE. slope, 60 feet below spur.

SUBDIVISION OF T. 30 S., R. 14 W.

Chains

Set an iron post, 3 feet long, 2 ins. diam., 30 ins. in the ground, for corner of sections 19, 20, 29, and 30, with brass cap marked

T30S R14W
 S 19 | S 20
 S 30 | S 29
 1937

from which

A pinon, 8 ins. diam., bears N.56° 15'E., 71 links distant, marked T30S R14W S 20 BT.

A juniper, 18 ins. diam., bears S.51°E. 63 links distant, marked T30S R14W S 29 BT.

A juniper, 10 ins. diam., bears S.23° 15'W. 42 links distant, marked T30S R14W S30 BT.

A juniper, 20 ins. diam., bears N.36° 45'W. 21 links distant, marked T30S R14W S 19 BT.

Land, low rolling hills, with a general southeasterly exposure and drainage.

Soil, shallow loose sand and clay, lying on a heavy clay subsoil; 4th rate.

Undergrowth, sage and bitter brush, mountain rush, yellowtop, Russian thistle and weeds.

Timber, scrub juniper and pinon.

Fair grazing land.

S.89° 58'E., on a random line, between sections 20 and 29.

40.00 Set temporary $\frac{1}{4}$ section corner.

80.10 Intersect the N. and S. line, 19 links S. of the corner of sections 20, 21, 28, and 29.

Thence

S.89° 54'W., on a true line, between sections 20 and 29.

Over low rolling mountainous land, through medium dense timber and short undergrowth.

2.90 Wash, 30 links wide, 2 feet deep, drains SE.; ascend gradual SE. slope.

12.50 Top of rocky peak on spur, 60 feet above wash, projects SW.; descend gradual NW. slope.

30.00 Draw, 220 feet below spur, drains SW.; ascend gradual SE. slope.

38.70 Spur, 110 feet above draw, projects SW.; descend gradual NW. slope.

40.05 On gradual NW. slope, 10 feet below spur.

Set an iron post, 3 feet long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked

SUBDIVISION OF T. 30 S., R. 14 W.

Chains

$$\frac{S\ 20}{S\ 29}$$

1937

from which

A pinon, 10 ins. diam., bears S.22°W. 117 links distant, marked $\frac{1}{4}$ S 29 BT.

A pinon, 10 ins. diam., bears N.49°W. 82 links distant, marked $\frac{1}{4}$ S 20 BT.

53.80 Junction of draws, 170 feet below the $\frac{1}{4}$ section corner, drains S.60°E. from the NW. and NE.; also forks of dim road, bears NW. and NE. from S.60°E.; ascend gradual NE. slope.

73.50 Spur, 60 feet above junction of draws, projects N. about 8 chains distant to end; descend steep W. slope.

76.00 Swale, 30 feet below spur, drains N.; ascend gradual NE. slope.

80.10 The corner of sections 19, 20, 29, and 30, 40 feet above swale,

Land, rolling and mountainous, with a general southeasterly exposure and drainage. Limestone and volcanic formations.

Soil, shallow and deep loose sand and clay, lying on a heavy clay subsoil; 4th rate.

Undergrowth, sage and bitter brush, mountain rush, yellowtop, Russian thistle and weeds.

Timber, scrub juniper and pinon.

Fair grazing land.

N.89° 57'W., on a random line, between sections 19 and 30.

40.00 Set temporary $\frac{1}{4}$ section corner.

80.00 Intersect the W. boundary of the township, 7 links N. of the corner of sections 19, 24, 25, and 30, heretofore described.

Thence

East, on a true line, between sections 19 and 30.

Over low rolling hills, through dense timber and scattered short undergrowth.

4.30 Low ridge, 50 feet high, bears NW. and SE.

10.70 Wash, 30 links wide, 4 feet deep, drains SE.

20.00 Spur, 40 feet high, projects SE.; descend gradual NE. slope.

38.90 Draw, 130 feet below spur, drains SE.

40.00 At base of gradual ascent over SW. slope, bears NW. and SE.

SUBDIVISION OF T. 30 S., R. 14 W.

Chains

1937

Set an iron post, 3 feet long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked

S 19

$\frac{1}{4}$ ———
S 30

1937

A juniper, 14 ins. diam., bears N.41° 45'E. 74 links distant, marked $\frac{1}{4}$ S 19 BT from which

A juniper, 12 ins. diam., bears S.53° 45'W. 45 links distant, marked $\frac{1}{4}$ S 30 BT

50.70 Spur, 70 feet above the $\frac{1}{4}$ section corner, projects SE.; descend gradual NE. slope.

30.00 The corner of sections 19, 20, 29, and 30, 140 feet below spur.

Land, rolling and mountainous, with a general south-easterly exposure and drainage. Limestone and volcanic formations.

Soil, shallow loose sand and clay, lying on a heavy clay subsoil; 4th rate.

Undergrowth, sage and bitter brush, mountain rush, Russian thistle, yellowtop and weeds.

Timber, scrub juniper and pinon.

Fair grazing land.

N.0° 03'W., between sections 19 and 20.

Descend gradual NE. slope of rolling mountainous land, through dense timber and short undergrowth.

9.80 Draw, 80 feet below corner, drains SE.; dim road, bears NW. and SE.; thence over rolling bottom lands of draw.

14.10 Begin gradual ascent over SE. slope of knoll, bears E. and W.

13.50 Top of ascent on knoll, 30 feet above draw; descend gradual NE. slope.

19.10 Wash, 30 links wide, 4 feet deep, in draw, 20 feet below top of knoll, drains SE.; ascend gradual SW. slope.

38.30 Spur, 140 feet above draw, projects S.15°W. from the N.; thence along top of spur.

40.00 On top of spur, projects S.

Set an iron post, 3 feet long, 1 in. diam., 6 ins. in the ground, to solid rock, and in a large mound of stone to top, for $\frac{1}{4}$ section corner, with brass cap marked

$\frac{1}{4}$
S 19 | S 20
1937

from which

SUBDIVISION OF T. 30 S., R. 14 W.

Chains

- A juniper, 12 ins. diam., bears S.23° 30'E. 76 links distant, marked $\frac{1}{4}$ S 20 BT
- A juniper, 16 ins. diam., bears N.61° 15'W., 116 links distant, marked $\frac{1}{4}$ S 19 BT
- 45.00 Leave top of spur, projects S. from the NE.; thence over rolling land.
- 52.20 Swale near head, 50 feet deep, drains SW.; ascend gradual S. slope.
- 69.70 Spur, 180 feet above swale, projects S.; descend gradual NE. slope.
- 74.20 Small draw, 20 feet below spur, drains SE.; ascend gradual SW. slope.
- 80.00 On gradual SW. slope, 90 feet above draw.

Set an iron post, 3 feet long, 2 ins. diam., 30 ins. in the ground, for corner of sections 17, 18, 19, and 20, with brass cap marked

T30S R14W

S 18 | S 17

S 19 | S 20

1937

from which

A pinon, 8 ins. diam., bears N.20° 30'E., 77 links distant, marked T30S R14W S 17 BT

A pinon, 6 ins. diam., bears S.33° 15'E., 67 links distant, marked T30S R14W S 20 BT

A pinon, 12 ins. diam., bears S.45° 30'W., 59 links distant, marked T30S R14W S 19 BT

A pinon, 12 ins. diam., bears N.24° 15'W., 120 links distant, marked T30S R14W S18 BT

Land, rolling and mountainous, with a general southeasterly and southwesterly exposure and drainage. Limestone and volcanic formations.

Soil, shallow loose sand and clay, lying on a heavy clay subsoil, 4th rate.

Undergrowth, sage and bitter brush, mountain rush, yellowtop, Russian thistle and weeds.

Timber, scrub juniper and pinon.

Fair grazing land.

N.89° 54'E., on a random line, between sections 17 and 20.

40.00 Set temporary $\frac{1}{4}$ section corner.

80.10 Intersect the N. and S. line, 3 links N. of the corner of sections 16, 17, 20, and 21.

Thence

S.89° 55'W., on a true line, between sections 17 and 20.

SUBDIVISION OF T. 30 S., R. 14 W.

Chains

entire

Descend gradual NW. slope of rolling mountainous land, through medium dense timber and short undergrowth.

8.20 Small swale; 40 feet below corner, drains NW.; continue gradual descent.

16.00 Wash; 30 links wide, 4 feet deep, in draw, 50 feet below corner, drains NW.; ascend gradual NE. slope.

40.05 On gradual NE. slope, 170 feet above swale.

Set an iron post, 3 feet long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked

S 17
 $\frac{1}{4}$ —
S 20
1937

from which

A pinon, 8 ins. diam., bears N.40°E. 60 links distant, marked $\frac{1}{4}$ S 17 B T

A pinon, 8 ins. diam., bears S.67° 45'E. 52 links distant, marked $\frac{1}{4}$ S 20 BT

Thence descend gradual SW. slope.

58.30 Wash, 30 links wide, 3 feet deep, in draw, 310 feet below the $\frac{1}{4}$ section corner, drains S.; road in draw, bears S. and NE.; ascend steep SE. slope.

64.30 Spur, 155 feet above draw, projects S.; descend gradual SW. slope.

68.30 Head of draw, 40 feet below spur, drains S.15°E.; ascend gradual SE. slope.

72.40 Spur, 60 feet above head of draw, projects S.3°W.; descend gradual NW. slope.

75.20 Swale, 40 feet below spur, drains S.15°W.; ascend gradual SE. slope.

80.10 The corner of sections 17, 18, 19, and 20, 70 feet above swale.

Land, rolling and mountainous, with a general north-westerly and southerly exposure and drainage. Limestone and volcanic formations.

Soil, shallow sand and clay with a rocky surface; 4th rate.

Undergrowth, sage and bitter brush, mountain rush, yellowtop, Russian thistle and weeds.

Timber, scrub juniper and pinon.

Fair graaint land.

West, on a random line, between sections 18 and 19.

40.00 Set temporary $\frac{1}{4}$ section corner.

79.80 Intersect the W. boundary of the township, 12 links S. of the corner of sections 13, 18, 19, and 24,

SUBDIVISION OF T. 30 S., R. 14 W.

Chains

heretofore described.

Thence

S.89° 55'E., on a true line between sections 18 and 19.

Over rolling mountainous land, through dense timber and scattered short undergrowth.

1.60 Wash, 120 links wide, 4 feet deep, in draw, drains SE.; thence over bottom lands of draw.

7.60 Old road, bears NW. and SE.

14.70 Spur, 50 feet above draw, projects SE.; descend gradual E. slope. From this point a windmill at an old well, bears S.40° 56'E. about 68 chains distant.

19.00 The W. edge of a large draw, bears N.30°W. and S.30°E.

22.60 Wash, 100 links wide, 3 feet deep, in draw, 90 feet below spur, drains S.30°E.

23.30 Old road, bears N.30°W. and S.30°E.

29.60 The E. edge of draw, bears N.30°W. and S.30°E.; ascend steep broken SW. slope.

39.80 On steep broken SW. slope, 110 feet above draw.

Set an iron post, 3 feet long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked

S 18

$\frac{1}{4}$ ———

S 19

1937

from which

A pinon, 6 ins. diam., bears S.45°E. 34 links distant, marked $\frac{1}{4}$ S 19 BT

A pinon, 10 ins. diam., bears N.36° 15'E. 70 links distant, marked $\frac{1}{4}$ S 18 BT

42.20 Small draw, 30 feet deep, drains SW.

55.40 Rocky limestone spur, 340 feet above the $\frac{1}{4}$ section corner, projects S.; descend steep E. slope.

70.00 Draw, 190 feet below spur, drains S.; ascend SW. slope.

74.30 Spur, 70 feet above draw, projects S.20°E.; descend gradual SE. slope.

77.00 Head of draw, 15 feet deep, drains S.20°E.; continue descent.

78.40 Spur, 20 feet below last spur, projects S.10°E.; descend gradual E. slope.

79.80 The corner of sections 17, 18, 19; and 20, 10 feet below spur.

Land, broken and mountainous, with a general southerly exposure and drainage. Limestone and volcanic formations.

SUBDIVISION OF T. 30 S., R. 14 W.

Chains

Soil, shallow sand, clay and gravel, with a rocky surface; 4th rate.

Undergrowth, sage and bitter brush, mountain rush, yellowtop and weeds.

Timber, juniper and pinon.

Fair grazing land.

N.0° 03'W., between sections 17 and 18.

Ascend steep rocky SE. slope of rolling mountainous land, through dense timber and scattered short undergrowth.

10.80 Spur, 120 feet above corner, projects E.; descend gradual N. slope.

20.10 Draw, 50 feet below spur, drains S.80°E.; ascend gradual S. slope.

32.80 Spur, 140 feet above draw, projects E.; descend gradual NE. slope.

37.80 Draw, 60 feet below spur, drains E.; ascend gradual SE. slope.

40.00 On gradual SE. slope, 30 feet above draw.

Set an iron post, 3 feet long, 1 in. diam., 15 ins. in the ground to solid rock, and in a mound of stone to top, for $\frac{1}{4}$ section corner, with brass cap marked

$\frac{1}{4}$
S 18 | S 17
1937

from which

A pinon, 10 ins. diam. bears N.71°E. 14 links distant, marked $\frac{1}{4}$ S 17 BT

A pinon, 10 ins. diam., bears N.49° 45'E. 127 links distant, marked $\frac{1}{4}$ S 18 BT

41.30 Rocky spur, 20 feet above the $\frac{1}{4}$ section corner, projects E.; descend gradual NE. slope.

48.10 Draw, 100 feet below spur, drains E.; ascend gradual S. slope.

50.30 Small spur, 30 feet high, projects SE.; descend gradual NE. slope.

59.10 Small draw, 20 feet deep, drains SE.; continue descent over NE. slope.

67.20 Large main draw, 40 feet below spur, drains SE.; dim road, in draw, bears NW. and SE.; thence over rolling land.

80.00 On rolling land.

Set an iron post, 3 feet long, 2 ins. diam., 30 ins. in the ground, for corner of sections 7, 8, 17, and 18, with brass cap marked

SUBDIVISION OF T. 30 S., R. 14 W.

Chains

T30S R14W
 S 7 | S 8
 S 18 | S 17
 1937

from which

A pinon, 12 ins. diam., bears N.47° 30'E. 94 links distant, marked T30S R14W S8 BT

A juniper, 24 ins. diam., bears S.49°45'E. 50 links distant, marked T30S R14W S17 BT

A pinon, 20 ins. diam., bears S.27° 45'W. 123 links distant, marked T30S R14W S18 BT

A pinon, 18 ins. diam., bears N.78°W. 44 links distant, marked T30S R14W S 7 BT

Land, rolling and mountainous with a general south-easterly exposure and drainage. Limestone and volcanic formations.

Soil, shallow loose sand and clay with a rocky surface; 4th rate.

Undergrowth, sage and bitter brush, mountain rush, yellowtop and weeds.

Timber, juniper and pinon.

Fair grazing land.

N.89° 55'E., on a random line, between sections 8 and 17.

40.00 Set temporary section corner.

80.06 Intersect the N. and S. line, 7 links S. of the corner of sections 8, 9, 16, and 17.

Thence

S.89° 52'W., on a true line, between sections 8 and 17.

Along gradual S. slope of broken mountainous land, through dense timber and scattered short undergrowth.

16.50 Draw, 30 feet below corner, drains S.; ascend gradual NE. slope.

29.20 Top of ascent on N. slope of small timbered knoll, 180 feet above draw, bears N.30°E: and S.30°W. 4 chains distant to top of knoll; descend gradual NW. slope.

40.03 On gradual NW. slope, 210 feet below top of ascent.

Set an iron post, 3 feet long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked

S 8
 $\frac{1}{4}$ ———
 S 17
 1937

from which

A pinon, 10 ins. diam., bears N.33°E. 144 links distant, marked $\frac{1}{4}$ S 8 BT

SUBDIVISION OF T. 50 S., R. 14 W.

| Chains | chains |
|--------|--|
| | A pinon, 6 ins. diam., bears S.3°E. 82 links distant, marked $\frac{1}{4}$ S. 17 BT |
| 46.60 | Draw, 70 feet below the $\frac{1}{4}$ section corner, drains S.20°W.; ascend gradual SE. slope. |
| 49.90 | Spur, 30 feet above draw, projects S.30°W.; descend gradual W. slope. |
| 54.40 | Draw, 30 feet deep, drains S.30°W. |
| 61.00 | Draw, 30 feet below spur, drains S.20°E.; ascend gradual E. slope. |
| 71.80 | Spur, 60 feet above draw, projects S.15°E.; descend general W. slope. |
| 79.70 | Draw, 60 feet below spur, drains S.; ascend gradual SE. slope. |
| 80.06 | The corner of sections 7, 8, 17, and 18, 10 feet above draw. |
| | Land, broken, and mountainous, with a general southerly exposure and drainage. Limestone and volcanic formations. |
| | Soil, shallow clay, gravel and sand, with a rocky surface; 4th rate. |
| | Undergrowth, sage and bitter brush, mountain rush, yellowtop and weeds. |
| | Timber, scrub juniper and pinon. |
| | Fair grazing land. |
| | N.89° 55'W., on a random line, between sections 7 and 18. |
| 40.00 | Set temporary $\frac{1}{4}$ section corner. |
| 79.70 | Intersect the W. boundary of the township, 9 links N. of the corner of sections 7, 12, 13, and 18 heretofore described. |
| | Thence |
| | S.89° 59'E., on a true line, between sections 7 and 18. |
| | Over rolling mountainous land, through dense timber and scattered short undergrowth. |
| 0.30 | Old road, bears S.30°E. and N. |
| 3.80 | Wash, 100 links wide, 3 feet deep, in bottom of main draw, drains S.30°E.; ascend broken SW. slope. |
| 20.40 | Draw, 40 feet deep, drains SW. and heads NE. about 8 chains distant; continue ascent. |
| 28.80 | Rocky limestone spur, 420 feet above draw, projects S.; descend gradual SE. slope. |
| 39.70 | On gradual SE. slope, 140 feet below spur. |
| | Set an iron post, 3 feet long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked |

SUBDIVISION OF T. 30 S., R. 14 W.

Chains


- $$\frac{S\ 7}{4}$$
 S 18
 1937
- from which
- A pinon, 6 ins. diam., bears S.81°W. 230 links distant, marked $\frac{1}{4}$ S 18 BT
- A pinon, 8 ins. diam., bears N.53°W. 198 links distant, marked $\frac{1}{4}$ S 7 BT
- From this corner, a shaft to a mine, bears N.12° 55'E., 22.95 chains distant.
- The SW. corner of an old frame house, bears N.18° 54'E., 23.71 chains.
- 44.40 Head of draw, 60 feet below the $\frac{1}{4}$ section corner, drains S.30°E.; old road bears N. and S.30°E.; ascend gradual SW. slope.
- 53.10 From this point, the mouth of a tunnel at a small mine, bears N.51°W. For intersecting bearing, see that given at the 59.30 chains point.
- 58.30 Spur, 50 feet above head of draw, projects SE.; descend gradual SE. slope.
- 59.30 From this point, the mouth of a tunnel at a small mine, bears N.58°W.
- 71.10 Draw, 150 feet below spur, drains SE.; thence over rolling land.
- 79.70 The corner of sections 7, 8, 17, and 18.
- Land, rolling and mountainous, with a general southeasterly exposure and drainage. Limestone and volcanic formations.
- Soil, shallow gravel, clay and sand, with a rocky surface; 4th rate.
- Undergrowth, sage and bitter brush, mountain rush, yellowtop and weeds.
- Timber, juniper and pinon.
- Fair grazing land.
-
- N.0° 03'W., between sections 7 and 8.
- Over rolling mountainous land, through dense timber, and scattered short undergrowth.
- 17.90 Low spur, 40 feet high, projects SE.
- 24.20 Wash, 40 links wide, 4 feet deep, drains SE.; ascend general SW. slope.
- 27.80 Slope changes from a gradual SW. slope to a gradual S. slope.
- 32.70 Slope changes from a gradual S. slope to a gradual SE. slope.

SUBDIVISION OF T. 30 S., R. 14 W.

Chains

40.00 On gradual SE. slope, 150 feet above section corner.

Set an iron post, 3 feet long, 1 in. diam., 10 ins. in the ground, to solid rock, and in a large mound of stone to top, for $\frac{1}{4}$ section corner, with brass cap marked



from which


A pinon, 10 ins. diam., bears N.44° 15'E. 41 links distant, marked $\frac{1}{4}$ S 8 B T

A pinon, 10 ins. diam., bears N.39° 15'W. 29 links distant, marked $\frac{1}{4}$ S 7 B T

43.60 Spur, 50 feet above the $\frac{1}{4}$ section corner, projects SW.; descend gradual NW. slope.

80.00 On gradual NW. slope, 120 feet below spur.

Set an iron post, 3 feet long, 2 ins. diam., 30 ins. in the ground, for corner of sections 5, 6, 7, and 8, with brass cap marked



from which

A pinon, 16 ins. diam., bears N.14°E. 77 links distant, marked T30S R14W S 5 B T

A pinon, 8 ins. diam., bears S.43° 45'E. 168 links distant, marked T30S R14W S 8 B T

A pinon, 16 ins. diam., bears S.57° 15'W. 114 links distant, marked T30S R14W S 7 B T

A pinon, 8 ins. diam., bears N.37° 30'W., 67 links distant, marked T30S R14W S 6 B T

Land, rolling and mountainous with a general southeasterly exposure and drainage. Limestone and volcanic formations.

Soil, shallow clay and sand with a rocky surface; 4th rate.

Undergrowth, sage and bitter brush, mountain rush, yellowtop, Russian thistle and weeds.

Timber, juniper and pinon.

Fair grazing land.

00.00

N.89° 52'E., on a random line, between sections 5 and 8.

40.00 Set temporary $\frac{1}{4}$ section corner.

80.16 Intersect the N. and S. line, 7 links N. of the corner of sections 4, 5, 8, and 9.

Thence

SUBDIVISION OF T. 30 S., R. 14 W.

Chains

S.89° 55'W., on a true line, between sections 5 and 8.

Ascend rocky steep E. slope of broken mountainous land, through dense timber and scattered short undergrowth.

4.70 Spur, 110 feet above corner, projects S.30°W.; descend abrupt W. slope.

14.90 Swale, 180 feet below spur, drains S.; ascend gradual SE. slope.

23.10 Spur, 40 feet above swale, projects SW.; descend gradually along S. slope.

29.50 Swale, 120 feet below spur, drains S.; ascend gradual SE. slope.

36.00 Ridge, 100 feet above swale, bears NE. and SW.; thence ascend gradual NE. slope.

40.08 On gradual NE. slope, 20 feet above ridge.

Set an iron post, 3 feet long, 1 in. diam., 5 ins. in the ground, to solid rock, and in a large mound of stone to top, for $\frac{1}{4}$ section corner, with brass cap marked

S 5
 $\frac{1}{4}$ ———
 S 8
 1937

from which

A pinon, 8 ins. diam., bears N.60° 45'E. 12 links distant, marked $\frac{1}{4}$ S 5 BT.

A pinon, 8 ins. diam., bears S.34° 15'E. 27 links distant, marked $\frac{1}{4}$ S 8 BT.

54.90 Recross top of ridge, .90 feet above the $\frac{1}{4}$ section corner, bears NW. and SE.; descend rocky SW. slope.

80.16 The corner of sections 5, 6, 7, and 8, 400 feet below the top of ridge.

Land, broken and mountainous, with a general southerly and southwesterly exposure and drainage. Limestone and volcanic formations.

Soil, shallow gravelly clay and sand, lying on bedrock; 4th rate.

Undergrowth, sage and bitter brush, mountain rush, yellowtop and weeds.

Timber, juniper and pinon.

Fair grazing land.

N.89° 59'W., on a random line, between sections 6 and 7.

40.00 Set temporary $\frac{1}{4}$ section corner.

79.70 Intersect the W. boundary of the township, 3 links N. of the corner of sections 1, 6, 7, and 12, heretofore described.

Thence


SUBDIVISION OF T. 30 S., R. 14 W.

Chains

East, on a true line, between sections 6 and 7.
Over rolling mountainous land, through dense timber and scattered short undergrowth.

- 6.20 Large main wash, 35 links wide, 4 feet deep, in draw, drains S.40°E.
- 12.70 Low spur, 20 feet high, projects SE.
- 17.10 Wash, 25 links wide, 3 feet deep, in draw, 30 feet deep, drains S.20°E.; ascend gradual NW. slope.
- 18.00 Old road, bears N.30°W. and S20°E.
- 24.80 Timber becomes more dense, bears NW. and SE.
- 39.70 On gradual NW. slope, 100 feet above draw.

Set an iron post, 3 feet long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap. marked



from which

A juniper, 6 ins. diam., bears N.66° 30'E. 71 links distant, marked $\frac{1}{4}$ S 6 BT

A juniper, 5 ins. diam., bears S.9°W. 47 links distant, marked $\frac{1}{4}$ S 7 BT

- 42.30 Spur, 50 feet above the $\frac{1}{4}$ section corner, projects S.30°W. descend gradual E. slope.
- 64.50 Wash, 15 links wide, 1 ft. deep, in draw, 60 feet below spur, drains S.10°W.; ascend gradual W. slope.
- 73.70 Old road, bears N.40°E. and S.75°W.
- 79.70 The corner of sections 5, 6, 7, and 8, 35 feet above draw.
Land, rolling and mountainous, with a general southerly exposure and drainage.
Soil, shallow loose sand and clay, lying on a heavy clay subsoil; 4th rate.
Undergrowth, sage and bitter brush, mountain rush, yellowtop, Russian thistle and weeds.
Timber, scrub juniper and pinon.
Fair grazing land.

N.0° 02'E., on a random line, between sections 5 and 6.

- 40.00 Set temporary $\frac{1}{4}$ section corner.
- 83.93 Intersect the N. boundary of the township 26 links W. of the corner of sections 5, 6, 31, and 32, heretofore described.
- Thence

SUBDIVISION OF T. 30 S., R. 14 W.

Chains

S.0° 13'W., on a true line, between sections 5 and 6.

Ascend gradual NW. slope of broken and rolling mountainous land, through dense timber and scattered short undergrowth.

8.00 Ridge, 10 feet above corner, bears NE. and SW.; descend gradual SE. slope.

10.70 Draw, 30 feet below ridge, drains SE.; ascend gradual NE. slope.

22.50 Recross top of ridge, 80 feet above draw, bears N.15°W. and S.15°E.; descend gradual SW. slope.

42.40 Small draw, 50 feet below ridge, drains SW.; ascend gradual NW. slope.

43.93 On gradual NW. slope, 20 feet above draw.

Set an iron post, 3 feet long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked

$\frac{1}{4}$
 S 6 | S 5
 1937

from which

A juniper, 14 ins. diam., bears S.33°E. 63 links distant, marked $\frac{1}{4}$ S 5 BT

A pinon, 12 ins. diam., bears N.30°W. 51 links distant, marked $\frac{1}{4}$ S 3 BT

45.90 Bend in top of ridge, 20 feet above the $\frac{1}{4}$ section corner, bears S.15°E. and N.15°E.; descend gradual SW. slope.

75.20 Draw, 120 feet below bend in ridge, drains SW.; thence over rolling land.

78.60 Old road, bears N.70°E. and S.70°W.

83.93 The corner of sections 5, 6, 7, and 8.

Land, rolling and mountainous, with a general southerly exposure and drainage. Limestone and volcanic formation.

Soil, shallow light colored clay and sand, with a rocky surface, lying on bedrock; 4th rate.

Undergrowth, sage and bitter brush, mountain rush, yellowtop, Russian thistle and weeds.

Timber, juniper and pinon.

Fair grazing land.

SUBDIVISION OF T. 30 S., R. 14 W.

GENERAL DESCRIPTION.

The lands within the boundaries of T. 30 S., R. 14 W., Salt Lake Meridian, Utah, consists of low rolling and broken mountains at the southeast end of the Wah Wah Mountains. Blue Mountain which is the highest portion of the township, extends in a northerly direction through the eastern portion of the township. The north end of this mountain is located in the SW $\frac{1}{4}$ of section 2. It is of a limestone, quartzite, volcanic and sandstone formation, and has very abrupt east and west slopes with numerous ledgy outcroppings. The remainder of the township consists of low rolling hills, with numerous volcanic peaks, from which project spurs and ridges.

The summit of Blue Mountain is at an elevation of about 7000 feet above sea level, while the remainder of the township is at an elevation of about 5500 feet above sea level.

The soil in the washes and wide draws consists of a deep loose sand and light colored clay, lying on a heavy clay subsoil, while that on the slopes of the spurs, ridges and Blue Mountain consists of a shallow light colored clay, with a rocky surface, lying on limestone and volcanic bedrock. The soil throughout the township may be classified as 4th rate.

The township in general has a northeasterly and southwesterly drainage and exposure, and in nearly all places it is covered with a very dense growth of juniper and pinon timber. This timber has no commercial value except for fencing and firewood.

Throughout the township a scattered and dense short undergrowth of sage and bitter brush, mountain rush, yellowtop, Russian thistle and weeds is found, which affords fair grazing for stock during both winter and summer.

No improved roads are in the township, but throughout the north and west portions, numerous dim roads are found which have been made by the stockmen and woodhaulers.

The only water in the township is two small springs located in the central portion of the Lot 2, section 7, and an old well located in the NW $\frac{1}{4}$ SE $\frac{1}{4}$, section 19. At the well is an old windmill, and at the springs is a concrete water tank, which is 60 links in diameter, and about 6 feet deep. An old frame cabin is located in the NE $\frac{1}{4}$ SW $\frac{1}{4}$, section 7, and a shaft of an old mine and a cabin are located in the NW $\frac{1}{4}$ SE $\frac{1}{4}$, section 7. Several prospect tunnels and open cuts are located in the northwest portion of the township, and the above named improvements are all that are located in the township.

BOOK A 522

4-680
(Revised May 1964)

FIELD ASSISTANTS

| NAMES | CAPACITY |
|------------------------|-----------|
| Ulysses S. Gardner | Chainman |
| William C. White | Chainman |
| Donald B. Stringfellow | Chainman |
| Joe Atkin | Chainman |
| Loren E. Bell | Chainman |
| John B. Van Den Akker | Chainman |
| Robert Burgess | Flagman |
| Fred Stevens | Flagman |
| Jack Buttrey | Flagman |
| George Snook | Flagman |
| LeRoy Pullman | Cornerman |
| Vernon Raymond Maberry | Cornerman |
| Vernon Morgan | Cornerman |
| Richard M. Hales | Cornerman |
| Robert Anderson | Axman |
| Bernarr Langston | Axman |
| Max Ford | Axman |
| Raed Smith | Axman |

CERTIFICATE OF ~~UNITED STATES~~ SURVEYOR

Elliot Bird, Surveyor,
Kenneth C. Vincent, Public Land Surveyor,
Edward Eliason, Transitman,
Molen Roper, Transitman,
Kelvin Winwood, Transitman,

HEREBY CERTIFY upon honor that

presence of special instructions bearing date of the 29th day of July, 1936,

received from the district cadastral engineer for Utah, with assignment supplemental assignment instructions dated April 1, 1937, instructions stated We have surveyed the subdivision and an

independent resurvey of the north and west boundaries of T. 30 S., R. 14 W.,

of the Salt Lake Meridian, in the State of Utah, which

represented in the foregoing field notes as having been executed by us and under our direction and that a survey has been made in strict conformity with said instructions, the Manual of Instructions for the Survey

of the Public Lands of the United States, and in the specific manner described in the foregoing field notes.

Milford, Utah,

May 1, 1937

Elliot Bird U.S. Surveyor
Kenneth C. Vincent Public Land Surveyor
Edward Eliason Transitman
Molen Roper Transitman
Kelvin Winwood Transitman

CERTIFICATE OF APPROVAL

OFFICE OF U.S. SUPERVISOR OF SURVEYS,

Denver, Colorado, MAR 2 - 1937

The foregoing field notes of the survey of the subdivision and independent resurvey of the north and west boundaries of T. 30 S., R. 14 W., Salt Lake Meridian, Utah,

executed by Elliot Bird, Kenneth C. Vincent, Edward Eliason, Molen Roper and Kelvin Winwood

under special instructions dated July 29, 1936, and supplemental instructions dated April 1, 1937

having been critically examined, and the necessary corrections made prior to their certification by the engineer, the said field notes, and the survey thereon described, are hereby approved.

Wm. H. Johnson
U.S. Supervisor of Surveys

CERTIFICATE OF TRANSCRIPT

I declare that the foregoing transcript of the field notes of the above described surveys is

a true copy of the original field notes on file in the public survey office

U.S. Supervisor of Surveys

Blank

Page

Blank

Page

original

UNITED STATES
DEPARTMENT OF THE INTERIOR
GENERAL LAND OFFICE

MAY 19 1937
U.S. DEPARTMENT OF THE INTERIOR
GENERAL LAND OFFICE

BOOK A-522

"C"

FIELD NOTES

Independent Resurvey of the West Boundary, Survey of the Subdivision and
Establishment of one-quarter section corners between closing corners on

North Boundary of T. 29 S., R. 14 W.

Of the Salt Lake Meridian,

in the State of Utah

EXECUTED BY

Elliot Bird, Surveyor,

Edward Eliason, Transitman,

Molen Roper, Transitman,

Kelvin Winwood, Transitman,

Under special instructions dated July 29, 1936, which provided

for the surveys included under Group No. 270, bearing the approval of the

Commissioner of the General Land Office under date of September 12, 1936,

supplemental
and/assignment instructions dated April 1, 1937.

Survey commenced May 3, 1937.

Survey completed May 19, 1937.

INDEX DIAGRAM.

Township 29 South, Range 14 West.
67 67 66 66 65 65

| | | | | | | | | | | |
|---|----|----|----|----|----|----|----|----|----|----|
| 7 | 63 | 5 | 47 | 4 | 36 | 3 | 27 | 2 | 18 | 1 |
| | 62 | 62 | | 46 | | 35 | | 26 | | 17 |
| 6 | 61 | 8 | 45 | 9 | 35 | 10 | 25 | 11 | 15 | 12 |
| | 60 | 59 | | 44 | | 34 | | 25 | | 15 |
| 5 | 58 | 17 | 43 | 16 | 33 | 15 | 24 | 14 | 14 | 13 |
| | 57 | 56 | | 42 | | 32 | | 23 | | 13 |
| 4 | 55 | 20 | 41 | 21 | 31 | 22 | 23 | 23 | 12 | 24 |
| | 54 | 53 | | 40 | | 31 | | 22 | | 11 |
| 3 | 52 | 29 | 39 | 28 | 30 | 27 | 21 | 26 | 11 | 25 |
| | 51 | 50 | | 38 | | 29 | | 20 | | 10 |
| 2 | 49 | 32 | 37 | 33 | 28 | 34 | 19 | 35 | 9 | 36 |

T. 29 S., R. 14 W.

The survey of T. 29 S., R. 14 W., Salt Lake Meridian, Utah, was commenced May 3, 1937, and executed with Buff and Buff transit No. 18003, used by Elliot Bird, Surveyor, Buff and Buff transit No. 16725, used by Edward Eliason, Transitman, Young and Sons transit No. 8581, used by Molen Roper, Transitman, and Keuffel and Esser transit No. 20576, used by Kelvin Winwood, Transitman. Except the Keuffel and Esser transit, the instruments are equipped with Smith solar attachments. The instruments have full vertical circles and the horizontal limbs are provided with two double verniers placed opposite to each other and reading to single minutes of arc, which is also the least count of the verniers of the latitude and declination arcs and vertical circles.

The instruments were approved for use on this survey conditional upon satisfactory field tests, by the district cadastral engineer for Utah, in supplemental assignment instructions dated April 1, 1937.

During the progress of this survey the solar attachments were not used, and all azimuths in this record are referred to true meridian determined by observations made on Polaris during the progress of the survey by the method of deflection angles and calculated courses, and the lines of the survey were carried forward by fore and backsights.

The instruments were in good adjustment at the commencement of this survey, and in order to determine a true meridian for the commencement of the survey we proceed as follows, using instrument No. 18003.

May 3, 1937: Stationed at the corner of Ts. 29 and 30 S., Rs. 14 and 15 W., Salt Lake Meridian, Utah, in approximate latitude $38^{\circ} 14' N.$, longitude $113^{\circ} 28' W.$, at 4h 8.4m p.m., correct 105th Meridian time, we observe Polaris west of the meridian, making four observations, two each with the telescope in direct and reversed positions, reading the horizontal deflection angle from Polaris in the direction E. to a flag pole about 20 chains to the N. of our station.

| | | |
|----------------------------------|---------|----------------------|
| Watch fast of local mean time | - - - | 0h 33.9m |
| Local mean time of observation | - - - | 3h 34.5m p.m. |
| Mean horizontal deflection angle | | |
| from Polaris to flag pole | - - - - | $1^{\circ} 15' E.$ |
| Azimuth of Polaris | - - - - | $1^{\circ} 14.7' E.$ |
| True bearing to flag pole | - - - - | North |

The instruments were kept in good adjustment throughout the progress of this survey, and numerous hour angle observations were made upon Polaris to determine true meridians from which the lines of the survey were deflected. Correct 105th Meridian time was kept during this survey and our watches were checked daily, comparison being made with time signals broadcast over radio station K S L.

Measurements.

Unless otherwise specified all measurements were made with Lallie steel tapes, 5 chains in length, compared with a Lufkin standard steel tape, 1 chain in length and found correct. The measurements were made on the slope, the vertical angle determined with clinometers and the slope measurements properly reduced to true horizontal distances which only appear in these notes.

2

INDEPENDENT RESURVEY OF WEST BOUNDARY
T. 29 S., R. 14 W.

Chains

Independent resurvey superseding survey executed by
T. C. Bailey, U. S. Deputy Surveyor in 1882.

From the corner of Ts. 29 and 30 S., Rs. 14 and 15 W., an iron post, 3 ins. diam., set, marked and witnessed as described in the official record of the survey of T. 30 R. 14 W. of this group.

North, between sections 31 and 36.

Note: None of the corners of the original survey of this boundary could be found.

Descend gradual NE. slope of rolling mountainous land, through dense timber and scattered short undergrowth.

- 1.80 Wash, 70 links wide, 4 ft. deep, in draw, 20 ft. below corner, drains S.65°E.; ascend gradual SW. slope.
- 26.90 Spur, 50 ft. above draw, projects SW.; descend gradual NW. slope.
- 31.40 Draw, 30 ft. below spur, drains SW.; ascend gradual SE. slope.
- 40.00 On gradual SE. slope, 50 ft. above draw.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked

$\frac{1}{4}$
S 36 | S 31
1937

from which

A pinon, 5 ins. diam., bears N.49°E., 13 links dist., marked $\frac{1}{4}$ S 31 B T

A pinon, 4 ins. diam., bears S.28°30'W., 27 links dist., marked $\frac{1}{4}$ S 36 B T

- 54.00 Spur, 80 ft. above the $\frac{1}{4}$ section corner, projects SW.; descend steep NW. slope.
- 62.00 Draw, 30 ft. below spur, drains S.65°W.; ascend gradual SE. slope.
- 70.00 Spur, 65 ft. above draw, projects S.70°W.; descend gradual NW. slope.
- 75.60 Draw, 30 ft. below spur, drains S.75°W.; ascend gradual SE. slope.
- 80.00 On gradual SE. slope.

Set an iron post, 3 ft. long, 2 ins. diam., 10 ins. in the ground to solid rock, and in a large mound of stone to top, for corner to sections 25, 30, 31 and 36, with brass cap marked

T29S
R15W R14W
S 25 | S 30
S 36 | S 31
1937

from which

A pinon, 9 ins. diam., bears N.67°15'E., 28 links

INDEPENDENT RESURVEY OF WEST BOUNDARY

T. 29 S., R. 14 W.

Chains

- 1st., marked T29S R14W S30 BT
- A pinon, 6 ins. diam., bears S.75°30'E., 30 links dist., marked T29S R14W S31 BT
- A pinon, 5 ins. diam., bears S.65°30'W., 29 links dist., marked T29S R15W S36 BT
- A pinon, 5 ins. diam., bears N.76°W., 40 links dist., marked T29S R15W S25 BT


Land, rolling and mountainous, with a general south-westerly exposure and drainage. Limestone and volcanic formation.
 Soil, shallow light colored clay and sand, with a rocky surface; 4th rate.
 Undergrowth, sage and bitter brush, mountain rush, yellowtop and weeds.
 Timber, juniper and pinon.
 Fair grazing land.

North, between sections 25 and 30.

Ascend gradual SE. slope of rolling mountainous land, through dense timber and scattered short undergrowth.

- 8.70 Long flat spur, 30 ft. above corner, projects S.70°W.; descend gradual NW. slope.
- 19.00 Draw, 30 ft. below spur, drains S.30°W.; ascend gradual SE. slope.
- 38.00 Top of ascent, on gradual SE. slope, bears SW. and E. about 5 chains distant to top of knoll; thence ascend gradually along W. slope.
- 40.00 On gradual W. slope, 160 ft. above draw.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked



from which

- A pinon, 8 ins. diam., bears S.81°30'E., 116 links dist., marked $\frac{1}{4}$ S 30 B T
- A pinon, 12 ins. diam., bears N.59° 45'W., 70 links dist., marked $\frac{1}{4}$ S 25 B T
- 42.50 Small spur, projects W.; descend gradual NW. slope.
- 47.40 Draw, 50 ft. below spur, drains W.; ascend rocky SE. slope.
- 62.40 Ridge, 230 ft. above draw, bears NE. and SW.; descend gradually along W. slope.
- 76.00 Draw, 80 ft. below ridge, drains W.; ascend gradually along W. slope.
- 80.00 On gradual W. slope, 30 ft. above draw.

Set an iron post, 3 ft. long, 2 ins. diam., 15 ins.

INDEPENDENT RESURVEY OF WEST BOUNDARY

T. 29 S., R. 14 W.

Chains

in the ground, to solid rock, and in a large mound of stone to top, for corner of sections 19, 24, 25 and 30, with brass cap marked

| | |
|------|------|
| T29S | |
| R15W | R14W |
| S 24 | S 19 |
| S 25 | S 30 |
| 1937 | |

from which

A juniper, 10 ins. diam., bears N.73°E., 58 links dist., marked T29S R14W S19 BT

A juniper, 10 ins. diam., bears S.35°45'E., 46 links dist., marked T29S R14W S30 BT

A pinon, 8 ins. diam., bears S.7°W., 54 links dist., marked T29S R15W S25 BT

A pinon, 10 ins. diam., bears N.33°30'W., 25 links dist., marked T29S R15W S24 BT

Land, broken and mountainous, with a general westerly exposure and drainage. Volcanic formation.

Soil, shallow light colored clay and sand, with a rocky surface; 4th rate.

Undergrowth, sage and bitter brush, mountain rush, yellowtop and weeds.

Timber, scrub juniper and pinon.

Fair grazing land.

North, between sections 19 and 24:

Ascend steep SW. slope of broken mountainous land, through dense timber and scattered short undergrowth.

7.70 Rocky spur, 40 ft. above corner, projects W.; descend steep rocky N. slope.

15.40 Wash, 30 links wide, 2 ft. deep, in draw, 10 ft. below spur, drains S.80°W.; ascend steep rocky S. slope.

26.50 Top of ridge, which forms the divide between the drainage to the N. into Wah Wah Valley, and the drainage to the S. into the Escalante Desert, 170 ft. above draw, bears N.75°W. and S.75°E.; descend gradual NW. slope.

40.00 On gradual NW. slope, 70 ft. below ridge.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked

| | |
|---------------|------|
| $\frac{1}{4}$ | |
| S 24 | S 19 |
| 1937 | |

from which

A pinon, 8 ins. diam., bears S.65°15'W., 408 links dist., marked $\frac{1}{4}$ S 24 B T

No bearing tree available in section 19.

INDEPENDENT RESURVEY OF WEST BOUNDARY

T. 29 S., R. 14 W.

Chains

- Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.
- 50.20 Wash, 20 links wide, 2 ft. deep, in draw, 70 ft. below the $\frac{1}{2}$ sec. corner, drains N.70°W.; ascend steep rocky S. slope.
- 62.00 Rocky spur, 80 ft. above draw, projects S.85°W.; descend gradual NW. slope.
- 80.00 On gradual NW. slope, 45 ft. below spur.

Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for corner of sections 13, 18, 19 and 24, with brass cap marked

| | |
|--------|------|
| T 29 S | |
| R15W | R14W |
| S 13 | S 18 |
| S 24 | S 19 |
| 1937 | |

from which

- A pinon, 5 ins. diam., bears N.35°15'E., 42 links dist., marked S18 BT. Tree too scrubby for other marks.
- A pinon, 15 ins. diam., bears S.44°15'E., 49 links dist., marked T29S R14W S19 BT.
- A pinon, 5 ins. diam., bears S.24°15'W., 27 links dist., marked T29S R15W S24 BT
- A juniper, 5 ins. diam., bears N.34°W., 76 links dist., marked S13 BT. Tree too scrubby for other marks.

Land, broken and mountainous, with a general westerly exposure and drainage. Volcanic and limestone formation.

Soil, shallow light colored clay with a rocky surface, lying on bedrock; 4th rate.

Undergrowth, sage and bitter brush, mountain rush, yellowtop and weeds.

Timber, juniper and pinon.

Fair grazing land.

North between sections 13 and 18.

Descend gradual NW. slope of broken mountainous land

through dense timber and scattered short undergrowth.

- 10.60 Draw, 120 ft. below corner, drains N.40°W.; ascend along steep rocky W. slope.
- 23.30 Ledge spur, 40 ft. above draw, projects N.80°W.; descend steep rocky NE. slope.
- 32.30 Bottom of bend in large gulch, 80 ft. below spur, drains N.20°W. from S.30°W.; ascend along steep W. slope.
- 40.00 On steep rocky W. slope, 90 ft. above bend in draw.

Set an iron post, 3 ft. long, 1 in. diam., 6 ins. in the ground to solid rock and in a large mound of stone to top, for $\frac{1}{2}$ section corner, with brass cap marked

INDEPENDENT RESURVEY OF WEST BOUNDARY
T. 29 S., R. 14 W.

Chains

$\frac{1}{4}$
S 13 | S 18
1937

from which

A pinon, 7 ins. diam., bears N.37°15'E., 85 links
dist., marked $\frac{1}{4}$ S18 BT.

A pinon, 4 ins. diam., bears S.44°W., 42 links
dist., marked $\frac{1}{4}$ S13 BT.

Thence descend along steep rocky W. slope.

80.00 On steep rocky W. slope, 240 ft. below the $\frac{1}{4}$ sec. cor.
Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in
the ground, for corner of sections 7, 12, 13 and 18,
with brass cap marked

T29S
R15W R14W
S 12 | S 7
S 13 | S 18
1937

from which

A pinon, 5 ins. diam., bears N.25°E., 54 links
dist., marked T29S R14W S7 BT.

A pinon, 16 ins. diam., bears S.14°30'E., 62 links
dist., marked T29S R14W S18 BT.

A pinon, 9 ins. diam., bears S.62°W., 63 links
dist., marked T29S R15W S13 BT.

A juniper, 3 ins. diam., bears N.58°W., 29 links
dist., marked BT.

Land, broken and mountainous, with a general westerly
exposure and drainage. Volcanic formation.
Soil, shallow light colored clay, with a rocky surface,
lying on bedrock; 4th rate.
Undergrowth, sage and bitter brush, yellowtop,
mountain rush and weeds.
Timber, juniper and pinon.
Fair grazing land.

North, between sections 7 and 12.

Descend steep rocky W. slope of broken mountainous land,
through dense timber and medium dense undergrowth.

10.00 Slope changes from a steep rocky W. slope to a steep
rocky NW. slope.

22.70 Base of descent, 100 ft. below section corner, bears
NE. and W.; ascend gradual SW. slope.

27.70 Slope changes from a SW. slope to a W. slope.

39.00 Top of ascent on W. slope, 30 ft. above base, bears
E. and W.; descend steep NW. slope.

40.00 On rocky steep NW. slope, 10 ft. below top of ascent.

Set an iron post, 3 ft. long, 1 in. diam., 6 ins. in
the ground to solid rock and in a mound of stone to top,

INDEPENDENT RESURVEY OF WEST BOUNDARY

T. 29.S., R. 14 W.

Chains

for $\frac{1}{4}$ section corner, with brass cap marked,

$\frac{1}{4}$
S 12 | S 7.
1937

from which

A pinon, 4 ins. diam., bears N.40°E., 18 links
dist., marked $\frac{1}{4}$ S 7 BT

A juniper, 10 ins. diam., bears S.85°W., 72 links
dist., marked $\frac{1}{4}$ S 12 BT

46.10 Draw, 120 ft. below the $\frac{1}{4}$ section corner, drains N.15°E.;
descend along E. slope.

51.30 Recross draw, drains N.15°W.; descend gradually along
W. slope.

63.50 Small draw, 190 ft. below the $\frac{1}{4}$ sec. corner, drains NW.;
ascend gradual SW. slope.

73.00 Slope changes from a SW. slope to a W. slope.

80.00 On steep W. slope, 90 ft. above draw.

Set an iron post, 3 ft. long, 2 ins. diam., 28 ins.
in the ground, for corner of sections 1, 6, 7 and 12,
with brass cap marked

T29S
R15W R14W
S 1 | S 6
S12 | S 7
1937

from which

A pinon, 10 ins. diam., bears N.71°E., 198 links
dist., marked T29S R14W S6 BT.

A juniper, 5 ins. diam., bears S.75°30'E., 168 links
dist., marked B T. Tree too scrubby for other
marks.

A juniper, 12 ins. diam., bears S.45°W., 453 links
dist., marked T29S R15W S12 BT.

A juniper, 4 ins. diam., bears N.69°30'W., 236 links
dist., marked T29S R15W S1 BT.

Land, broken and mountainous, with a general northwest-
erly exposure and drainage. Volcanic formation.
Soil, shallow light colored clay, with a rocky surface,
lying on bedrock; 4th rate.
Undergrowth, sage and bitter brush, yellowtop, mountain
rush and woods.
Timber, juniper and pinon.
Fair grazing land.

North, between sections 1 and 6.

Descend gradually along steep W. slope of broken
mountainous land, through scattered timber and dense
undergrowth.

11.40 Top of rocky spur, 90 ft. above section corner, projects
S.80°W.; descend along steep rocky W. slope.

INDEPENDENT RESURVEY OF WEST BOUNDARY
T. 29 S., R. 14 W.

Chains

30.00 Saddle in spur, projects W., about 15.00 chains distant to high knoll; continue descent along W. slope.

40.00 On steep rocky W. slope, 170 ft. below spur at the 11.40 chains point.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked



from which

A pinon, 7 ins. diam., bears S.49° 15' E., 68 links dist., marked $\frac{1}{4}$ S 6 BT

A juniper, 8 ins. diam., bears N.55° 45' W., .35 links dist., marked $\frac{1}{4}$ S 1 BT

43.70 Bend in wash, 10 links wide, 2 ft. deep, in draw, 30 ft. below the $\frac{1}{4}$ section corner, drains N.15° W. from S.20° W.; continue descent along steep W. slope.

62.60 Bend in same wash, 160 ft. below the $\frac{1}{4}$ section corner, drains NW. from S.5° W.; ascend gradual SW. slope.


67.00 Small spur, 20 ft. above bend in wash, projects W. 2.00 chains distant to end; descend abrupt NW. slope.

70.60 Bottom of main draw, 90 ft. below spur, drains N.40° E.; ascend steep SE. slope.

78.50 Small spur, 70 ft. above draw, projects N.75° E. 2.00 chains distant to end; descend steep N. slope.

80.00 On steep N. slope, 40 ft. below spur.

Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground to solid rock and in a large mound of stone to top, for corner of lots 1 and 8, section 1, and lots 4 and 5, section 6, with brass cap marked



from which

A pinon, 10 ins. diam., bears N.80° 15' E., 48 links distant, marked L4 S6 BT.

A pinon, 12 ins. diam., bears S.72° E., 90 links distant, marked L5 S6 BT.

A pinon, 7 ins. diam., bears S.40° W., 51 links distant, marked L8 S1 BT.

A pinon, 9 ins. diam., bears N.73° 15' W., 61 links distant, marked L1 S1 BT.

87.00 Draw, 30 ft. below lot corner, drains S.50° E.; ascend steep S. slope of sandstone formation.

91550 Intersect the N. boundary of the township.

Set an iron post, 3 ft. long, 3 ins. diam., 28 ins. in the ground, for closing corner of T. 29 S., R. 14 W. and

INDEPENDENT RESURVEY OF WEST BOUNDARY
T. 29 S., R. 14 W.

Chains

15 W., with brass cap marked

T28S R14W
S31
S 1 | S 6
R15W R14W
T29S
CC
1937

from which

A juniper, 15 ins. diam., bears S.55°45'E., 29 links dist., marked T29S R14W S6 CC BT.

A pinon, 3 ins. diam., bears S.24°W., 25 links dist., marked BT

From this corner the corner of T. 28 S., Rs. 14 and 15 W. bears West, 7.27 chains distant, an iron post, 3 ins. diam., set, marked and witnessed as described in the official record of the survey of T. 28 S., R. 14 W. of this group.

Land, broken and mountainous, with a general westerly exposure and drainage. Volcanic and sandstone formation. Soil, shallow light colored clay and sand, with a rocky surface, lying on bedrock; 4th rate. Undergrowth, sage and bitter brush, mountain rush, yellowtop and weeds. Timber, juniper and pinon. Fair grazing land.

SUBDIVISION OF T. 29 S., R. 14 W.

From the corner of sections 1, 2, 35 and 36 on the S. boundary of the township, an iron post, 2 ins. diam., set, marked and witnessed as described in the official record of the survey of T. 30 S., R. 14 W. of this group.

N.0°01'W., between sections 35 and 36.

Over rolling land through dense short undergrowth.

37.00 Swale, 15 ft. deep, drains E.

40.00 On rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked

$\frac{1}{4}$
S 35 | S 36
1937

raise a

mound of stone, 3 ft. base, 2 ft. high, W. of cor.

55.00 Unimproved road, bears E. and W.

76.00 Wash, 20 links wide, 5 ft. deep, drains SE.

80.00 On gradual E. slope, 35 ft. above the $\frac{1}{4}$ section corner.

Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for corner of sections 25, 26, 35 and 36, with

SUBDIVISION OF T. 29 S., R. 14 W.

Chains

brass cap marked

T29S R14W
 S26 | S25
 S35 | S36
 1937

raise a mound

of stone, 3 ft. base, 2 ft. high, W. of cor.

Land, rolling, with a general easterly exposure and drainage.

Soil, deep, light colored clay, lying on a heavy clay subsoil; 4th rate.

Undergrowth, dense sage and black brush, yellowtop, Russian thistle and weeds.

No timber.

Fair grazing land.

East on a random line between sections 25 and 36.

40.00 Set temporary $\frac{1}{4}$ section corner.

80.04 Intersect the E. boundary of the township, 5 links S. of the corner of sections 25, 30, 31 and 36, an iron post, 2 ins. diam., set, marked and witnessed, as described in the official record of the survey of T. 29 S., R. 13 W., Group 271, Utah.

Thence

S. 89° 58' W., on a true line, between sections 25 and 36.

Descend gradual W. slope of rolling land, through dense short undergrowth.

5.40 Wash, 30 links wide, 5 ft. deep, drains S. 30° E.

32.80 Wash, 30 links wide, 6 ft. deep, drains SE.

40.02 On rolling land.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked

S 25
 $\frac{1}{4}$ ———
 S 36
 1937

raise a

mound of stone, 3 ft. base, 2 ft. high, N. of corner.

56.10 Unimproved road, bears NW. and SE.

80.04 The corner of sections 25, 26, 35 and 36.

Land, rolling, with a general easterly exposure and drainage.

Soil, deep, light colored clay, lying on a heavy clay subsoil; 4th rate.

Undergrowth, short sage and black brush, yellowtop, Russian thistle and weeds.

No timber.

Fair grazing land.

SUBDIVISION OF T. 29 S., R. 14 W.

Chains

N.0°01'W., between sections 25 and 26.

Over gradual E. slope of rolling land, through dense short undergrowth.

40.00 On gradual E. slope.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked

$\frac{1}{4}$
S 26 | S 25

1937

raise a mound

of stone, 3 ft. base, 2 ft. high, W. of cor.

48.80 Unimproved road, bears NW. and SE.

65.00 Swale, 15 ft. below the $\frac{1}{4}$ section corner, drains SE.; ascend gradual S. slope.

80.00 On gradual S. slope, 35 ft. above swale.

Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for corner of sections 23, 24, 25 and 26, with brass cap marked

T29S R14W
S 23 | S 24
S 26 | S 25

1937

from which

A lone juniper, 3 ins. diam., bears S.87°30'W., 202 links dist., marked S 26 BT.

No other bearing trees available.

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of corner.

Land, rolling, with a general easterly exposure and drainage.

Soil, deep, light colored clay, lying on a heavy clay subsoil; 4th rate.

Undergrowth, sage and black brush, yellowtop, Russian thistle and weeds.

No timber.

Fair grazing land.

N.89°58'E., on a random line, between sections 24 and 25.

40.00 Set temporary $\frac{1}{4}$ section corner.

80.10 Intersect the E. boundary of the township, 3 links N. of the corner of sections 19, 24, 25 and 30, an iron post, 2 ins. diam., set, marked and witnessed as shown in the official record of the survey of T. 29 S., R. 14 W., Group 271, Utah.

Thence

S.89°59'W., on a true line, between sections 24 and 25.

Descend gradual NW. slope of rolling land, through

SUBDIVISION OF T. 29 S., R. 14 W.

| Chains | | Station |
|--------|--|---------|
| | dense short undergrowth. | |
| 7.70 | Draw, 15 ft. deep, drains S.20°W.; ascend gradual E. slope. | |
| 13.00 | Low spur, 45 ft. above draw, projects S.20°W.; descend gradual NW. slope. | |
| 22.80 | Swale, 45 ft. below spur, drains S.20°E.; ascend gradual SE. slope. | |
| 40.05 | On gradual SE. slope, 40 ft. above swale. Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked S24 $\frac{1}{4}$ — S25 1937 raise a mound of stone, 3 ft. base, 2 ft. high, N. of corner. | |
| 46.00 | Spur, 10 ft. above the $\frac{1}{4}$ section corner, projects SE.; descend gradually along S. slope. | |
| 80.10 | The corner of sections 23, 24, 25, and 26, 20 ft. below spur. Land, rolling with a general southeasterly exposure and drainage. Soil, deep light colored clay, lying on a heavy clay subsoil; 4th rate. Undergrowth, sage and black brush, yellow top, Russian thistle and weeds. No timber. Fair grazing land. | |
| | N.0° 01'W., between sections 23 and 24. Over rolling land, through medium dense short undergrowth. | |
| 5.00 | Base of low rolling hills, bears E. and W.; ascend gradual S. slope. | |
| 29.20 | Limestone spur, 290 ft. above corner; projects SW., also rolling top of divide between Wah Wah and Escalante valleys, bears NE. and westerly; descend gradual NW. slope. | |
| 40.00 | On limestone surface rock, 50 ft. below divide, mark a X, over which Set an iron post, 3 ft. long, 1 in. diam., in a large mound of stone to top, for $\frac{1}{4}$ section corner, with brass cap marked S23 S24 1937 Continue gradual descent over NW. slope. | |
| 50.70 | The N. base of rolling hills, bears N.30°E., and S.30°W., thence descend gradually along W. slope. | |

SUBDIVISION OF T. 29 S., R. 14 W.

| Chains | | | | | |
|--------|---|------|------|------|------|
| 80.00 | <p>On gradual W. slope, 150 ft. below the $\frac{1}{4}$ section corner.</p> <p>Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for corner of sections 13, 14, 23 and 24, with brass cap marked.</p> <div style="text-align: center;"> <p>T29S R14W</p> <table border="1"> <tr> <td>S 14</td> <td>S 13</td> </tr> <tr> <td>S 23</td> <td>S 24</td> </tr> </table> <p>1937</p> </div> <p style="text-align: right;">raise a mound</p> <p>of stone, 3 ft. base, 2 ft. high, W. of corner.</p> <p>Land, rolling, with a general southerly and north-westerly exposure and drainage. Soil, shallow light colored clay and sand mixed with rock and gravel, lying on bedrock; 4th rate. Undergrowth, sage and black brush, yellowtop, Russian thistle and weeds. No timber. Fair grazing land.</p> | S 14 | S 13 | S 23 | S 24 |
| S 14 | S 13 | | | | |
| S 23 | S 24 | | | | |
| 40.00 | <p>N.89°59'E., on a random line, between sections 13 and 24.</p> <p>Set temporary $\frac{1}{4}$ section corner.</p> <p>80.16 Intersect the E. boundary of the township, 5 links N. of the corner of sections 13, 18, 19 and 24, an iron post, 2 ins. diam., set, marked and witnessed as described in the official record of the survey of T. 29 S., R. 14 W., Group 271, Utah.</p> <p>Thence</p> <p>N.89°59'W., on true line, between sections 13 and 24.</p> <p>Ascend gradual E. slope of rolling land, through dense short undergrowth.</p> <p>12.50 Spur, 70 ft. above corner, projects S.15°W.; descend gradual NW. slope.</p> <p>29.40 Wash, 30 links wide, 3 ft. deep, in draw, 90 ft. below spur, drains S.; ascend gradual E. slope.</p> <p>40.08 On gradual E. slope, 20 ft. above draw.</p> <p>Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked</p> <div style="text-align: center;"> <p>S13</p> <p>$\frac{1}{4}$ —</p> <p>S24</p> <p>1937</p> </div> <p style="text-align: right;">raise a mound</p> <p>of stone, 3 ft. base, 2 ft. high, N. of corner.</p> <p>58.56 Top of rocky limestone ridge, which forms the divide between Wah Wah and Escalante Valleys, 230 ft. above the $\frac{1}{4}$ section corner, bears N.20°E. and S.20°W.; descend gradual W. slope.</p> <p>70.14 Base of rolling hills and ridge, bears N.30°E. and S.30°W.; thence over rolling valley land.</p> | | | | |

SUBDIVISION OF T. 29 S., R. 14 W.

Chains

021210

80.16 The corner of sections 13, 14, 23 and 24, 190 ft. below top of ridge.

Land, rolling, with a general southeasterly and north-westerly exposure and drainage. Soil, shallow light colored clay and sand with a rocky surface; 4th rate. Undergrowth, sage and black brush, yellowtop, Russian thistle and weeds. No timber. Fair grazing lands.

N.0°01'W., between sections 13 and 14.

Over rolling valley land, through dense short undergrowth

24.80 Unimproved road, bears NE. and SW.

40.00 On gradual W. slope.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for 1/4 section corner, with brass cap marked

1/4
S14 | S13
1937

raise a mound

of stone, 3 ft. base, 2 ft. high, W. of corner.

41.30 Unimproved road, bears E. and W.

80.00 On gradual W. slope, 40 ft. above the 1/4 section corner.

Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for corner of sections 11, 12, 13 and 14, with brass cap marked

T29S R14W
S 11 | S 12
S 14 | S 13
1937

raise a mound

of stone, 3 ft. base, 2 ft. high, W. of corner.

Land, rolling, with a general westerly exposure and drainage. Soil, deep clay and sand, mixed with gravel and rock, lying on a heavy clay subsoil; 4th rate. Undergrowth, sage and black brush, yellowtop, Russian thistle and weeds. No timber. Fair grazing land.

S.89° 59'E., on a random line, between sections 12 and 13.

40.00 Set temporary 1/4 section corner.

80.20 Intersect the E. boundary of the township, 3 links N. of the corner of sections 7, 12, 13 and 18, an iron post, 2 ins. diam., set, marked and witnessed as described in the official record of the survey of T. 29 S., R. 14 W., Group 271, Utah.

SUBDIVISION OF T. 29 S., R. 14 W.

Chains

Thence

N.89° 58'W., on a true line, between sections 12 and 13.

Descend gradual SW. slope of rolling hills through dense short undergrowth and scattered timber.

7.70 Draw, 30 ft. below corner, drains SW.; ascend gradual SE. slope.

8.40 Unimproved road, bears NE. and SW.

29.20 Rocky spur, 120 ft. above draw, projects S.30°E.; descend gradual W. slope.

37.30 Unimproved road, bears N. and S.

37.90 Draw, 110 ft. below spur, drains S.; ascend gradual E. slope.

40.10 On gradual E. slope, 20 ft. above draw.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked

S12

 $\frac{1}{4}$ —

S13

1937

from which

A juniper, 8 ins. diam., bears N.17°E., 81 links dist., marked $\frac{1}{4}$ S 12 B T.

A juniper, 4 ins. diam., bears S.17°W., 77 links dist., marked $\frac{1}{4}$ S 13 B T

51.70 Top of volcanic peak, on divide ridge, between Wah Wah and Escalante valleys, 200 ft. above the $\frac{1}{4}$ section cor., bears N.30°E. and S.30°W.; descend gradual W. slope.

65.20 Base of rolling hills, bears N.20°E. and S.20°W.; thence over rolling valley land.

75.00 Leave timber, bears N. and SE.

80.20 The corner of sections 11, 12, 13 and 14, 250 ft. below ridge.

Land, rolling with a general easterly and westerly exposure and drainage.

Soil, shallow and deep light colored clay, lying on a heavy clay subsoil and bedrock; 4th rate.

Undergrowth, sage and black brush, yellowtop, Russian thistle and weeds.

Timber, scrub juniper and pinon.

Fair grazing land.

N.0°01'W., between sections 11 and 12.

Along gradual W. slope of rolling valley land, through dense short undergrowth.

5.00 Low rise, 10 ft. high, bears E. and W.; descend gradual NW. slope.

18.47 Intersect line 2-3, Brim Stone Mine lode (patented)

SUBDIVISION OF T. 29 S., R. 14 W.

Chains

Survey No. 5446, S.86°02'W., 15.57 chains distant from corner No. 2, a pine post, 4 ins. square, extending 1 ft. above the ground, scribed 2-5446 on NW. face. No trace of corner No. 3 could be found.

19.00 Small draw, 15 ft. deep, drains W.

19.44 Mouth of tunnel, about 70 ft. deep, bears N.43°W., 1.50 chains distant.

The SW. corner of a 2 room frame house, 35 ft. long, 12 ft. wide, bears N.50°25'E., 3.57 chains distant.

The SW. corner of a one room frame house, 16 ft. long, 12 ft. wide, bears N.50°28'E., 4.40 chains distant.

19.50 Unimproved road, E. and W. 1.00 ch. distant to forks of road bearing SW. and N.70°W.

23.47 An incline shaft, bears S.54°E., 46 links distant.

An incline shaft, bears N.82°W., 1.20 chains distant.

An incline shaft, bears S.61°W., 118 links distant.

An incline shaft, bears N.81°W., 3.42 chains distant.

A rocky mound, 4 ft. base, 3 ft. high, on top of a rocky knoll, which I take to be the true position of U. S. Mineral Monument No. 1, Sulphur Mining District, bears N.37°06'E. 25.28 chains distant. No trace of the marked corner monument could be found.

24.00 Top of ascent on E. slope knoll, 65 ft. above draw, bears E., and W. 2.00 chains distant to top of knoll; descend gradual NE. slope.

27.58 Intersect line 1-4, Brim Stone Mine lode, survey No. 5446, S.86°02'W., 14.94 chains distant from corner No. 1, a pine post, 4 ins. square, extending 1 ft. above the ground, scribed 1-5446 on SW. face. No trace of corner No. 4 could be found.

28.00 Slope changes from a gradual NE. slope to a gradual W. slope.

40.00 On gradual W. slope, 50 ft. below top of ascent.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked

$\frac{1}{4}$
S11|S12
1937

raise a mound

of stone, 3 ft. base, 2 ft. high, W. of corner.

52.50 Shallow draw, drains W.; ascent gradual SW. slope.

67.46 The rock mound, which I take to be at the true position of U. S. Mineral Monument No. 1, bears S.32°38'E.

67.50 Rocky spur, 80 ft. above draw, projects S.70°W.

79.80 Draw, 15 ft. deep, drains S.70°W.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for corner of sections 1, 2, 11 and 12,

SUBDIVISION OF T. 29 S., R. 14 W.

Chains

with brass cap marked.

T29S R14W

S 2 | S 1

S11 | S12

1937

raise a mound

of stone, 3 ft. base, 2 ft. high, W. of corner.

Land, rolling with a general westerly exposure and drainage.

Soil, shallow and deep light colored clay and sand, with a rocky surface; 4th rate.

Undergrowth, sage and black brush, yellowtop, Russian thistle and weeds.

No timber.

Fair grazing land.

S.89°58'E., on a random line, between sections 1 and 12.

40.00 Set temporary $\frac{1}{4}$ section corner.

80.22 Intersect the E.-boundary of the township, 3 links S. of the corner of sections 1, 6, 7 and 12, an iron post, 2 ins. diam., set, marked and witnessed, as described in the official record of the survey of T. 29 S., R. 13 W., Group 271, Utah.

Thence

N.89°59'W., on a true line, between sections 1 and 12.

Ascend gradual NE. slope of rolling mountainous land, through scattered timber and medium dense short undergrowth.

13.70 Spur, 110 ft. above corner, projects N.; ascend gradually along N. slope.

19.80 Spur, 120 ft. above corner, projects N.; descend gradual NW. slope.

28.60 Unimproved road, bears N.30°E. and S.30°W.

31.40 Head of draw, 85 ft. below spur, drains N.; leave timber, bears N. and S.; ascend gradual E. slope.

37.40 Ridge, 30 ft. above head of draw, bears NW. and S.60°E.; descend gradually along general S. slope.

40.11 On gradual S. slope, 10 ft. below ridge.

Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground to solid rock, and in a large mound of stone to top, for $\frac{1}{4}$ section corner, with brass cap marked

S1

$\frac{1}{4}$ —

S12

1937

Alongside of post, deposit a limestone, 10x10x8 ins., marked X.

45.10 Head of draw, 20 ft. below the $\frac{1}{4}$ section corner, drains S.; ascend gradual E. slope.

SUBDIVISION OF T. 29 S., R. 14 W.

| Chains | | en1200 | | | | | | | | |
|--------|---|--------|---|----|----|---|---|------|--|--|
| 50.00 | Recross top of ridge, 50 ft. above head of draw, bears NE. and SW.; continue ascent over E. slope. | | | | | | | | | |
| 61.70 | Top of volcanic elongated knoll, 130 ft. above ridge, bears N. and S.; descend abrupt W. slope. | | | | | | | | | |
| 71.30 | Descent becomes gradual, bears N.20°W. and S. | | | | | | | | | |
| 80.22 | The corner of sections 1, 2, 11 and 12, 270 ft. below top of knoll. | | | | | | | | | |
| | Land, rolling and mountainous, with a general southerly and northerly exposure and drainage. Limestone, quartzite and volcanic formation. | | | | | | | | | |
| | Soil, shallow light colored clay and sand, lying on bedrock; 4th rate. | | | | | | | | | |
| | Undergrowth, sage and black brush, mountain rush, yellowtop, Russian thistle and weeds. | | | | | | | | | |
| | Timber, scrub juniper on E. portion of mile. | | | | | | | | | |
| | Fair grazing land. | | | | | | | | | |
| | N.0°01'W., on a true line, between sections 1 and 2. | | | | | | | | | |
| | Ascend general SW. slope of rolling hills, through dense short undergrowth. | | | | | | | | | |
| 21.30 | Top of ascent on W. slope of volcanic elongated knoll, 160 ft. above corner, bears E. and W.; descend abrupt NW. slope. | | | | | | | | | |
| 40.00 | On abrupt NW. slope, 125 ft. below top of ascent. | | | | | | | | | |
| | Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked | | | | | | | | | |
| | $\frac{1}{4}$ S2 S1 1937 | | | | | | | | | |
| | raise a mound | | | | | | | | | |
| | of stone, 3 ft. base, 2 ft. high, W. of corner. | | | | | | | | | |
| 40.30 | Small draw, 20 ft. deep, drains W.; continue descent. | | | | | | | | | |
| 54.90 | Spur, 110 ft. below the $\frac{1}{4}$ section corner, projects N. 30°W. 3.00 chains distant to low knoll; descend gradual NE. slope. | | | | | | | | | |
| 80.00 | On gradual NE. slope, 100 ft. below spur. | | | | | | | | | |
| | Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for corner of lots 4 and 5, section 1, and lots 1 and 8, section 2, with brass cap marked | | | | | | | | | |
| | <table border="1"> <tr><td>1</td><td>4</td></tr> <tr><td>S2</td><td>S1</td></tr> <tr><td>8</td><td>5</td></tr> <tr><td colspan="2">1937</td></tr> </table> | 1 | 4 | S2 | S1 | 8 | 5 | 1937 | | |
| 1 | 4 | | | | | | | | | |
| S2 | S1 | | | | | | | | | |
| 8 | 5 | | | | | | | | | |
| 1937 | | | | | | | | | | |
| | raise a mound | | | | | | | | | |
| | of stone, 3 ft. base, 2 ft. high, W. of corner. | | | | | | | | | |
| 85.00 | Draw, 10 ft. below lot corner, drains N.70°W.; ascend gradual SW. slope. | | | | | | | | | |

SUBDIVISION OF T. 29 S., R. 14 W.

Chains

90.00

Intersect the N. boundary of the township.

Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for closing corner of sections 1 and 2; T. 29 S., R. 14 W., with brass cap marked

T29S R14W

S34

S 2 S 1

T29S R14W

C C

1937

raise a mound

of stone, 3 ft. base, 2 ft. high, S. of corner.

From this corner the corner of sections 35 and 36, T. 29 S., R. 14 W., bears West 7.70 chains distant; an iron post, 2 ins. diam., set, marked and witnessed as described in the official record of the survey of T. 29 S., R. 14 W., of this group.

Land, rolling and mountainous, with a general westerly and northwesterly exposure and drainage. Limestone and volcanic formation.

Soil, shallow light colored clay and sand with a rocky surface; 4th rate.

Undergrowth, sage and black brush, yellowtop, Russian thistle and weeds.

No timber.

Past grazing land.

From the corner of sections 2, 3, 34 and 35 on the S. boundary of the township, an iron post, 2 1/2 ins. diam., set, marked and witnessed as described in the official record of the survey of T. 30 S., R. 14 W. of this group.

N.0° 01' E., between sections 34 and 35.

Ascend gradual S. slope of rolling mountainous land, through scattered timber and dense short undergrowth.

18.80 Spur, 210 ft. above corner, projects SW.; continue gradual ascent along E. slope of quartzite peak.

23.60 Top of ascent on E. slope of peak, 210 ft. above corner, bears E. and W. about 7.00 chains distant to top of peak; descend gradually along broken NE. slope.

40.00 On broken NE. slope, 140 ft. below top of ascent.

Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground, for section corner, with brass cap marked

†

S34|S35

1937

from which

A juniper, 6 ins. diam., bears N.50°15'E., 42 links dist., marked † S 35 BT

SUBDIVISION OF T. 29 S., R. 14 W.

Chains

A pinon, 6 ins. diam., bears S.80°45'W., 33 links dist., marked $\frac{1}{4}$ S 34 B T

45.00 Base of descent and enter rolling land, bears NW. and SE.

60.00 Unimproved road, bears E. and W.

72.00 Sandy wash, 30 links wide, 2 ft. deep, drains N.80°E.

80.00 On rolling land, 80 ft. below the $\frac{1}{4}$ section corner.

Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for corner of sections 26, 27, 34 and 35, with brass cap marked

| | |
|------|------|
| T29S | R14W |
| S27 | S26 |
| S34 | S35 |
| 1937 | |

from which

A juniper, 6 ins. diam., bears N.23° 45'E., 167 links dist., marked T29S R14W S26 BT.

A juniper, 8 ins. diam., bears S.25°45'E., 59 links dist., marked T29S R14W S35 BT.

A juniper, 6 ins. diam., bears S.13°15'W., 81 links dist., marked BT. Tree too scrubby for other marks.

A juniper, 6 ins., diam., bears N.52°30'W., 185 links dist., marked T29S R14W S27 BT.

Land, rolling and mountainous with a general easterly exposure and drainage.

Soil, shallow light colored clay and sand with a rocky surface; 4th rate.

Undergrowth, sage and bitter brush, mountain rush, yellowtop, Russian thistle and weeds.

Timber, scrub juniper and pinon.

Fair grazing land.

East, on a random line, between sections 26 and 35.

40.00 Set temporary $\frac{1}{4}$ section corner.

80.00 Intersect the N. and S. line, 12 links S. of the corner of sections 25, 26, 35 and 36.

Thence

S.89°55'W., on a true line between sections 26 and 35.

Descend gradual SW. slope of rolling land, through dense short undergrowth.

10.00 Wide swale, 70 ft. below corner, drains SE.; ascend gradual NE. slope.

37.00 Wash, 8 links wide, 4 ft. deep, drains NE. from the W.; thence along bottom of wash.

40.00 True point for the $\frac{1}{4}$ section corner falls in bottom of wash draining E. from the SW., where it is impracticable to set a corner.

SUBDIVISION OF T. 29 S., R. 14 W.

Chains

41.00 On rolling land, 70 ft. above section corner.
 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for witness corner to the $\frac{1}{4}$ section corner of sections 26 and 35, with brass cap marked

26
 $\frac{1}{4}$ — WC
 35
 1937

raise a mound
 of stone, 3 ft. base, 2 ft. high, N. of corner.

42.00 Unimproved road, bears N. and S.

80.00 The corner of sections 26, 27, 34 and 35, 70 ft. above the witness corner to the $\frac{1}{4}$ section corner.

Land, rolling with a general easterly exposure and drainage.
 Soil, deep light colored clay and sand, with a rocky surface, lying on a heavy clay subsoil; 4th rate.
 Undergrowth, sage brush, yellowtop, Russian thistle and weeds.
 No timber.
 Fair grazing land.

N.0° 01'W., between sections 26 and 27.

Over rolling land, through very scattered timber and dense short undergrowth.

5.00 Top of small rise, 10 ft. high, bears E. and W.

10.00 Shallow swale, 10 ft. deep, drains E.

27.80 Wash, 10 links wide, 4 ft. deep, drains NE.; unimproved road in wash, bears NE. and SW.

40.00 On rolling land, 40 ft. below section corner.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked

$\frac{1}{4}$
 S27 | S26
 1937

from which

A juniper, 8 ins. diam., bears N42°35'E., 320 links dist., marked $\frac{1}{4}$ S 26 BT

No other trees available.

61.30 Small shallow swale, drains E.

64.80 Wash, 8 links wide, 4 ft. deep, drains E.

71.80 Sandy wash, 30 links wide, 3 ft. deep, drains E.

80.00 On rolling land, 20 ft. below the $\frac{1}{4}$ section corner.

Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for corner of sections 22, 23, 26 and 27, with brass cap marked

SUBDIVISION OF T. 29 S., R. 14 W.

Chains

| | |
|-----------|------|
| T29S R14W | |
| S 22 | S 23 |
| S 27 | S 26 |
| 1937 | |

cont'd

50.15

raise a mound

of stone, 3 ft. base, 2 ft. high, W. of corner.

Land, rolling, with general easterly exposure and drainage.
 Soil, deep light colored clay and sand, lying on a heavy clay subsoil; 4th rate.
 Undergrowth, sagebrush, yellowtop, Russian thistle and weeds.
 Timber, a few scattered scrub juniper and pinon.
 Fair grazing land.

N. 89° 55' E., on a random line, between sections 23 and 26

40.00 Set temporary 1/4 section corner.

80.00 Intersect the N. and S. line, 7 links S. of the corner of sections 23, 24, 25 and 26.

Thence

S. 89° 52' W. on a true line, between sections 23 and 26.

Along gradual S. slope of rolling land, through dense short undergrowth.

14.30 Small draw, drains S.

16.00 Low spur, 20 ft. high, projects S., 3.00 chains distant to end.

20.00 Wash, 30 links wide, 3 ft. deep, drains SE.

21.00 Unimproved road, bears NW. and SE.

37.30 Unimproved road, bears N. and S.

40.00 On rolling land, 20 ft. above section corner.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for 1/4 section corner, with brass cap marked

| |
|------|
| S 23 |
| 1/4 |
| S 26 |
| 1937 |

raise a mound

of stone, 3 ft. base, 2 ft. high, N. of corner.

Thence ascend gradual E. slope.

80.00 The corner of sections 22, 23, 26 and 27, 80 ft. above the 1/4 section corner.

Land, rolling, with a general southerly and easterly exposure and drainage.

Soil, deep light colored clay and sand, with rocky surface, lying on a heavy clay subsoil; 4th rate.

Undergrowth, sagebrush, mountain rush, yellowtop,

SUBDIVISION OF T. 29 S., R. 14 W.

Chains

Russian thistle and weeds.
No timber.
Fair grazing land.

N.0° 01'W., between sections 22 and 23.

Ascend gradual SE. slope of rolling land which forms the divide between the drainage to the Escalante Desert to the S. and the Wah Wah Valley to the N., through dense short undergrowth.

25.00 Rolling top of divide, 20 ft. above the $\frac{1}{4}$ section corner, bears E. and W.; descend gradual NE. slope.

32.80 Small wash, 10 links wide, 3 ft. deep, drains NE.

40.00 On rolling NE. slope.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked

| |
|---------------|
| $\frac{1}{4}$ |
| S22 S23 |
| 1937 |

raise a mound

of stone, 3 ft. base, 2 ft. high, W. of corner.

51.10 Wash, 6 links wide, 2 ft. deep, drains NE.

80.00 On rolling land, 40 ft. below the $\frac{1}{4}$ section corner.

Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for corner of sections 14, 15, 22 and 23, with brass cap marked

| |
|-------------|
| T29S R14W |
| S15 S14 |
| S22 S23 |
| 1937 |

raise a mound

of stone, 3 ft. base, 2 ft. high, W. of corner.

Land, rolling, with a general southeasterly and north-easterly exposure and drainage.

Soil, deep light colored clay and sand with a rocky surface, lying on a heavy clay subsoil; 4th rate.

Undergrowth, sagebrush, yellowtop, Russian thistle and weeds.

No timber.

Fair grazing land.

N.89°52'E., on a random line, between sections 14 and 23.

40.00 Set temporary $\frac{1}{4}$ section corner.

79.96 Intersect the N. and S. line, 5 links S. of the corner of sections 13, 14, 23 and 24.

Thence

S.89° 50'W., on a true line, between sections 14 and 23.

Over rolling land, through dense short undergrowth.

SUBDIVISION OF T. 29 S., R. 14 W.

| Chains | |
|--------|--|
| 25.00 | Unimproved road, bears N. and S. |
| 27.90 | Wash, 20 links wide, 4 ft. deep, drains S. |
| 30.30 | Unimproved road, bears NW. and SE. about 7.00 chains distant to junction with last road. |
| 39.98 | On rolling land, 65 ft. above section corner. Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked |
| | S14 |
| | $\frac{1}{4}$ ----- S23 |
| | 1937 |
| | raise a mound |
| | of stone, 3 ft. base, 2 ft. high, N. of corner. |
| 79.96 | The corner of sections 14, 15, 22 and 23, 20 ft. above the $\frac{1}{4}$ section corner. |
| | Land, rolling, with a general northeasterly exposure and drainage. Soil, deep light colored clay and sand, with a rocky surface, lying on a heavy clay subsoil; 4th rate. Undergrowth, sagebrush, mountain rush, yellowtop, Russian thistle and weeds. No timber. Fair grazing land. |
| | N.0° 01' W., between sections 14 and 15. |
| | Over rolling land, through dense short undergrowth. |
| 10.60 | Small sandy swale, drains NE. |
| 40.00 | On rolling land, 30 ft. below section corner. |
| | Set an iron post, 3 ft. long, 1 1/2 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ section corner with brass cap marked |
| | $\frac{1}{4}$ S15 S14 |
| | 1937 |
| | raise a mound |
| | of stone, 3 ft. base, 2 ft. high, W. of corner. |
| 80.00 | On rolling land, 30 ft. below the $\frac{1}{4}$ section corner. |
| | Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for corner of sections 10, 11, 14 and 15, with brass cap marked |
| | T29S R14W |
| | S10 S11 |
| | S15 S14 |
| | 1937 |
| | raise a mound |
| | of stone, 3 ft. base, 2 ft. high, W. of corner. |
| | Land, rolling, with a general northeasterly exposure |

SUBDIVISION OF T. 29 S., R. 14 W.

Chains

Soil, deep light colored clay and sand, lying on a heavy clay subsoil; 4th rate.

Undergrowth, dense sagebrush, yellowtop, Russian thistle and weeds.

No timber.

Fair grazing land.

N.89°50'E., on a random line, between sections 11 and 14.

40.00 Set temporary $\frac{1}{4}$ section corner.

79.98 Intersect the N. and S. line, 9 links S. of the corner of sections 11, 12, 13 and 14.

Thence

S.89°46'W., on a true line, between sections 11 and 14.

Over rolling land, through dense short undergrowth.

9.50 Unimproved road, bears NE. and SW.

28.80 Unimproved road, bears N. and S.

39.99 On rolling land, 75 ft. below section corner.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked

S11
 $\frac{1}{4}$ —
 S14
 1937

raise a mound

of stone, 3 ft. base, 2 ft. high, N. of corner.

50.60 Unimproved road, bears NW. and SE.

50.80 Wide swale, 20 ft. below the $\frac{1}{4}$ section corner, drains N.; ascend gradual NE. slope.

79.98 The corner of sections 10, 11, 14 and 15, 10 ft. above swale.

Land, rolling, with a general northerly exposure and drainage.

Soil, deep light colored clay and sand lying on a heavy clay subsoil; 4th rate.

Undergrowth, dense sagebrush, yellowtop, Russian thistle and weeds.

No timber.

Fair grazing land.

N.0°01'W., between sections 10 and 11.

Over rolling land, through dense short undergrowth.

23.60 Swale, drains E.

40.00 On rolling land.

SUBDIVISION OF T. 29 S., R. 14 W.

Chains

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked

$\frac{1}{4}$
 S10 | S11
 1937

raise a mound

of stone, 3 ft. base, 2 ft. high, W. of corner.

57.10 Shallow swale, drains E.

80.00 On rolling land.

Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for corner of sections 2, 3, 10 and 11, with brass cap marked

T29S R14W
 S 3 | S 2
 S10 | S11
 1937

raise a mound

of stone, 3 ft. base, 2 ft. high, W. of corner.

Land, rolling, with a general easterly exposure and drainage.

Soil, deep clay and sand, with a rocky surface, lying on a heavy clay subsoil; 4th rate.

Undergrowth, sagebrush, yellowtop, Russian thistle and weeds.

No timber.

Fair grazing land.

N. 89° 46' E., on a random line, between sections 2 and 11.

40.00 Set temporary $\frac{1}{4}$ section corner.

79.96 Intersect the N. and S. line, 9 links N. of the corner of sections 1, 2, 11 and 12.

Thence

S. 89° 50' W., on a true line, between sections 2 and 11.

Descend gradual W. slope of rolling land through dense short undergrowth.

20.00 Slope changes from a gradual W. slope to a gradual NW. slope.

27.00 Shallow swale, drains NW.

35.90 Unimproved road, bears N. and S.

39.98 On rolling land, 140 ft. below section corner.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked

$\frac{1}{4}$
 S 2
 S11
 1937

raise a mound.

SUBDIVISION OF T. 29 S., R. 14 W.

Chains

of stone, 3 ft. base, 2 ft. high, N. of corner.

62.80 Small wash, in swale, 40 ft. below the $\frac{1}{4}$ section corner, drains N.; ascend gradual E. slope.

63.80 Unimproved road, bears N. and S.

79.96 The corner of sections 2, 3, 10 and 11; 50 ft. above swale.

Land, rolling, with a general northwesterly and easterly exposure and drainage.
Soil, deep light colored clay and sand, with a rocky surface, lying on a heavy clay subsoil; 4th rate.
Undergrowth, sagebrush, yellowtop, Russian thistle and weeds.
No timber.
Fair grazing land.

N.0° 01'W., on a true line, between sections 2 and 3.

Ascend gradually along E. slope of rolling land, through dense short undergrowth.

40.00 On gradual E. slope, 40 ft. above section corner.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked

$\frac{1}{4}$
S3 | S2
1937

raise a mound

of stone, 3 ft. base, 2 ft. high, W. of corner.

63.00 Rocky wash, 20 links wide, 4 ft. deep, drains E.

74.80 Small swale, drains NE.

80.00 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for corner of lots 4 and 5, section 2, and lots 1 and 8, section 3, with brass cap marked

1 | 4
S3 — S2
8 | 5
1937

raise a mound

of stone, 3 ft. base, 2 ft. high, W. of corner.

91.04 Intersect the N. boundary of the township.

Set an iron post, 3 ft. long, 2 ins. diam., 18 ins. in the ground to solid rock, and in a large mound of stone to top, for closing corner of sections 2 and 3, T. 29 S., R. 14 W., with brass cap marked

T28S R14W
S35

S3 | S2
T29S R14W
C C
1937

SUBDIVISION OF T. 29 S., R. 14 W.

Chains

alongside of

post, deposit a volcanic stone, 12x12x8 ins., marked X.
 From this corner, the corner of section 27, R. 14
 this Group, bears West, 7.80 chains distant; an iron
 post, 2 ins. diam., set, marked and witnessed, as des-
 cribed in the official record of the survey of T. 28 S.,
 R. 14 W.

Land, rolling, with a general northeasterly exposure
 and drainage.
 Soil, deep light colored clay and sand, with a rocky
 surface, lying on a heavy clay subsoil; 4th rate.
 Undergrowth, dense sagebrush, yellowtop, Russian
 thistle and weeds.
 No timber.
 Fair grazing land.


From the corner of sections 3, 4, 33 and 34, on the S.
 boundary of the township, an iron post, 2 ins. diam.,
 set, marked and witnessed as described in the official
 record of the survey of T. 30 S., R. 14 W., of this
 group.

N.0° 02'W., between sections 33 and 34.

Over rolling bench land, through medium dense timber
 and scattered short undergrowth.

- 3.60 Wash, 20 links wide, 5 ft. deep, drains S.85°E.
- 15.60 Wash, 30 links wide, 2 ft. deep, drains S.80°E.
- 38.70 Top of low rise, 30 ft. high, bears E. and W.
- 39.80 Wash, 20 links wide, 4 ft. deep, drains N.80°E.
- 40.00 On gradual S. slope.

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in
 the ground, for $\frac{1}{4}$ section corner, with brass cap marked



from which

- A juniper, 8 ins. diam., bears S.66°E., 34 links
 dist., marked $\frac{1}{4}$ S34 BT
- A juniper, 5 ins. diam., bears N.16°W., 82 links
 dist., marked $\frac{1}{4}$ S33 BT

- 40.10 Unimproved road, bears N.85°E. and S.85°W.
- 53.40 Wash, 40 links wide, 5 ft. deep, drains E.; unimproved
 road in wash, bears E. and W.
- 66.20 Wash, 35 links wide, 2 ft. deep, drains E.
- 72.30 Wash, 50 links wide, 2 ft. deep, drains S.85°E.
- 80.00 In wash, 30 links wide, 1 ft. deep, drains E.

Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in
 the ground, for corner of sections 27, 28, 33 and 34,
 with brass cap marked

SUBDIVISION OF T. 29 S., R. 14 W.

Chains

T29S R14W

S 28 | S 27

S 33 | S 34

1937

from which

A juniper, 7 ins. diam., bears N.27°30'E., 17 links dist., marked BT. Tree too scrubby for other marks.

A juniper, 13 ins. diam., bears S.42°15'E., 11 links dist., marked T29S R14W S34 BT.

A pinon, 15 ins. diam., bears S.77°30'W., 66 links dist., marked T29S R14W S33 BT.

A juniper, 11 ins. diam., bears N.49°30'W., 27 links dist., marked T29S R14W S28 BT.

Land, rolling with a general easterly exposure and drainage.

Soil, deep clay and gravel, with a rocky surface, lying on a heavy clay subsoil; 4th rate.

Undergrowth, sage and bitter brush, mountain rush, yellowtop, Russian thistle and weeds.

Timber, juniper and pinon.

Fair grazing land.

East, on a random line, between sections 27 and 34.

40.00 Set temp. $\frac{1}{4}$ section corner.

79.98 Intersect the corner of sections 26, 27, 34 and 35.

Thence

West, on a true line, between sections 27 and 34.

Ascend gradual E. slope of rolling land, through scattered timber and dense short undergrowth.

19.90 Timber becomes dense, bears N.15°E. and S.15°W.

21.30 Wash, 25 links wide, 4 ft. deep, in draw, 50 ft. above section corner, drains N.65°E.; continue ascent over E. slope.

39.99 On gradual E. slope, 100 ft. above section corner.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked

S 27

 $\frac{1}{4}$

S 34

1937

from which

A juniper, 14 ins. diam., bears N.75°E., 78 links dist., marked $\frac{1}{4}$ S27 BT

A juniper, 8 ins. diam., bears S.43°W., 58 links dist., marked $\frac{1}{4}$ S34 BT

70.70 Wash, 40 links wide, 1 ft. deep, drains N.80°E.

74.10 Recross wash, drains S.85°E. from the W.; thence along bottom of wash.

SUBDIVISION OF T. 22 S., R. 14 W.

Chains

79.98 The corner of sections 27, 28, 33 and 34, 55 ft. above the $\frac{1}{4}$ section corner.

Land, rolling with a general easterly exposure and drainage.

Soil, deep light colored clay with a rocky surface, lying on a heavy clay subsoil; 4th rate.

Undergrowth, sage and bitter brush, mountain rush, yellowtop, Russian thistle and weeds.

Timber, juniper and pinon.

Fair grazing land.

N.0°02'W., between sections 27 and 28.

Over general E. slope of rolling bench land, through scattered timber and dense short undergrowth.

21.80 Wash, 15 links wide, 1 ft. deep, drains S.85°E.

39.60 Wash, 20 links wide, 1 ft. deep, drains E.

40.00 On rolling E. slope.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked

$\frac{1}{4}$
S28 | S27
1937

from which

A juniper, 13 ins. diam., bears N.76°45'E., 83 links dist., marked $\frac{1}{4}$ S27 BT

A juniper, 6 ins. diam., bears S.63°30'W., 78 links dist., marked $\frac{1}{4}$ S28 BT

50.10 Wash, 35 links wide, 3 ft. deep, drains N.85°E.

55.90 Timber becomes scattered, bears W. and SE.

69.70 Deep wash, 100 links wide, 20 ft. deep, drains S.85°E.

80.00 On rolling land.

Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for corner of sections 21, 22, 27 and 28, with brass cap marked

T29S R14W
S 21 | S 22

S 28 | S 27
1937

from which

A juniper, 3 ins. diam., bears N.57°30'E., 108 links dist., marked S22 BT. Tree too scrubby for other mark

A juniper, 12 ins. diam., bears S.22°30'E., 204 links dist., marked T29S R14W S27 BT

A juniper, 5 ins. diam., bears S.30°W., 54 links dist., marked T29S R14W S28 BT

A juniper, 15 ins. diam., bears N.74°W., 119 links dist., marked S21 BT. Tree too scrubby for other mark

SUBDIVISION OF T. 29 S., R. 14 W.

Chains

Land, rolling with a general easterly exposure and drainage. Volcanic formation.
Soil, shallow and deep light colored clay with a rocky surface, lying on a heavy clay subsoil; 4th rate.
Undergrowth, sage and bitter brush, mountain rush yellowtop and grass.
Timber, juniper and pinon.
Fair grazing land.

East, on random line, between sections 22 and 27.

40.00 Set temporary $\frac{1}{4}$ section corner.

80.00 Intersect the N. and S. line, 3 links S. of the corner of sections 22, 23, 26 and 27.

Thence

S.89°59'W., on a true line, between sections 22 and 27.

Ascend gradual E. slope of rolling land, through dense short undergrowth.

40.00 On rolling E. slope, 100 ft. above the section corner.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked

$$\frac{1}{4} \frac{S \ 22}{S \ 27}$$

1937

raise a mound

of stone, 3 ft. base, 2 ft. high, N. of corner.

80.00 The corner of sections 21, 22, 27 and 28, 120 ft. above the $\frac{1}{4}$ section corner.

Land, rolling, with a general easterly exposure and drainage. Volcanic formation.
Soil, deep and shallow light colored clay, with a rocky surface, lying on a heavy clay subsoil; 4th rate.
Undergrowth, sage and bitter brush, mountain rush, yellowtop, Russian thistle and weeds.
No timber.
Fair grazing land.

N.0°02'W., between sections 21 and 22.

Over rolling mountainous land through dense timber and short undergrowth.

3.00 Small rise, which forms the divide between the drainage into Wah Wah Valley to the N. and the Escalante Desert to the S., bears E. and W.

6.50 Wash, 35 links wide, 6 ft. deep, drains N.85°E.

27.70 Wash, 15 links wide, 6 ft. deep, drains E.

40.00 On gradual E. slope.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked

SUBDIVISION OF T. 29 S., R. 14 W.

Chains

$\frac{1}{4}$
S21 | S22
1937

from which

A juniper, 9 ins. diam., bears S.83°E., 29 links
dist., marked $\frac{1}{4}$ S22 BT

A juniper, 9 ins. diam., bears N.74°W., 82 links
dist., marked $\frac{1}{4}$ S21 BT

80.00 On rolling land, 50 ft. below the $\frac{1}{4}$ section corner.

Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in
the ground, for corner of sections 15, 16, 21 and 22,
with brass cap marked

T29S R14W
S 16 | S 15
S 21 | S 22

1937

from which

A juniper, 8 ins. diam., bears N.49°30'E., 285 links
dist., marked T29S R14W S15 BT

A juniper, 10 ins. diam., bears S.33°30'E., 9 links
dist., marked T29S R14W S22 BT

A juniper, 10 ins. diam., bears N71°30'W., 21 links
dist., marked T29S R14W S16 BT

No suitable bearing tree available in section 21.

Land, rolling, with a general northeasterly exposure
and drainage. Volcanic formation.

Soil, shallow and deep light colored clay, with a rocky
surface, lying on a heavy clay subsoil; 4th rate.

Undergrowth, sage and bitter brush, mountain rush,
yellowtop, Russian thistle and weeds.

Timber, juniper and pinon.

Fair grazing land.

N.89°59'E., on a random line, between sections 15 and 22.

40.00 Set temporary $\frac{1}{4}$ section corner.

80.00 Intersect the N. and S. line, 2 links N. of the corner
of sections 14, 15, 22 and 23.

Thence

West, on a true line, between sections 15 and 22.

Ascend gradual E. slope of rolling land, through
scattered timber and dense short undergrowth.

40.00 On gradual E. slope.

Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in
the ground, to solid rock, and in a large mound of
stone to top, for $\frac{1}{4}$ section corner, with brass cap
marked

SUBDIVISION OF T. 29 S., R. 14 W.

Chains

S 15
 $\frac{1}{4}$ S 22
 1937

from which

A juniper, 18 ins. diam., bears S.35°15'E., 164 links dist., marked $\frac{1}{4}$ S 22 BT

A juniper, 12 ins. diam., bears S.8°15'W., 178 links dist., marked $\frac{1}{4}$ S22 BT

No suitable bearing tree available in section 15.

76.70 Top of ascent, 50 ft. above section corner, bears N. and S.; descend gradual NW. slope.

80.00 The corner of sections 15, 16, 21 and 22, 10 ft. below top of ascent.

Land, rolling, with a general easterly exposure and drainage; volcanic formation.
 Soil, deep and shallow light colored clay with a rocky surface, lying on a heavy clay subsoil; 4th rate.
 Undergrowth, sage and bitter brush, mountain rush, yellowtop, Russian thistle and weeds.
 Timber, juniper and pinon.
 Fair grazing land.

N.0°02'W., between sections 15 and 16.

20.00 Descend gradual NE. slope of rolling mountainous land, through scattered timber and dense short undergrowth. Wash, 10 links wide, 2 ft. deep, in draw, 30 ft. below corner, drains N.80°E.; ascend gradual S. slope.

35.00 Begin abrupt ascent over broken S. slope covered with large volcanic boulders, bears E. and W.

40.00 On steep S. slope, 120 ft. above draw.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked

$\frac{1}{4}$
 S16|S15
 1937

raise a mound

of stone, 3 ft. base, 2 ft. high, W. of corner.

No suitable bearing trees available.

54.00 Top of rocky volcanic spur, 270 ft. above the $\frac{1}{4}$ section corner, projects N.85°E.; descend gradual N. slope.

62.40 Descent becomes abrupt, bears E. and W.

74.00 Draw, 320 ft. below spur, drains N.80°E.; ascend steep SE. slope.

80.00 On steep SE. slope, 110 ft. above draw.

Set an iron post, 3 ft. long, 2 ins. diam., 10 ins. in the ground, to solid rock, and in a large mound of stone to top, for corner of sections 9, 10, 15 and 16, with brass cap marked

SUBDIVISION OF T. 29 S., R. 14 W.

Chains

T29S R14W
S 9 | S10
S16 | S15
 1937

Alongside of post deposit a volcanic stone, 6x4x3 ins. marked X.

No suitable bearing trees available.

Land, rolling and mountainous with a general easterly exposure and drainage; volcanic formation.

Soil, shallow light colored clay, lying on volcanic bedrock; 4th rate.

Undergrowth, sagebrush, mountain rush, yellowtop and weeds.

Timber, a few scattered scrub juniper and pinon.

Fair grazing land.

East, on a random line, between sections 10 and 15.

40.00 Set temporary $\frac{1}{4}$ section corner.

80.00 Intersect the N. and S. line, 3 links N. of the corner of sections 10, 11, 14 and 15.

Thence

N. 89° 59' W., on a true line, between sections 10 and 15.

Ascend gradual E. slope of rolling land, through dense short undergrowth.

40.00 On gradual E. slope, 40 ft. above section corner.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked

$\frac{1}{4}$ $\frac{S10}{S15}$

1937

raise a mound

of stone, 3 ft. base, 2 ft. high, N. of corner.

46.00 Wash, 15 links wide, 2 ft. deep, drains SE.

61.80 Low spur, 90 ft. above the $\frac{1}{4}$ section corner, slopes NE.; descend gradually along N. slope.

68.50 Recross wash, 40 ft. below spur; drains N. 70° E.; ascend steep rocky SE. slope.

80.00 The corner of sections 9, 10, 15 and 16, 160 ft. above wash.

Land, rolling, with a general easterly exposure and drainage; volcanic formation.

Soil, shallow light colored clay, with a rocky surface, lying on volcanic bedrock; 4th rate.

Undergrowth, sagebrush, yellowtop, Russian thistle, and weeds.

No timber.

Fair grazing land.

SUBDIVISION OF T. 29 S., R. 14 W.

Chains

N.0°02'W., between sections 9 and 10.

Ascend steep rocky SE. slope of rolling mountainous land, through dense short undergrowth.

5.10 Top of ascent on SE. slope, 25 ft. above corner, bears E. and W.; descend steep rocky NE. slope.

36.10 Wash, 15 links wide, 2 ft. deep, in draw, 250 ft. below top of ascent, drains S.80°E.; ascend steep S. slope.

40.00 On steep S. slope, 30 ft. above draw.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked
$$\begin{array}{c} \frac{1}{4} \\ S9|S10 \\ 1937 \end{array}$$

raise a mound

of stone, 3 ft. base, 2 ft. high, W. of corner.

62.00 The top of S. edge of rocky spur, 250 ft. above the $\frac{1}{4}$ section corner, bears NE. and SW.; thence over level top of spur, projecting NE.

70.00 The top of N. edge of spur, bears NE. and SW.; descend steep NW. slope.

80.00 On steep NW. slope, 110 ft. below spur.

Set an iron post, 3 ft. long, 2 ins. diam., 6 ins. in the ground, to solid rock, and in a large mound of stone to top, for corner of sections 3, 4, 9 and 10, with brass cap marked

$$\begin{array}{c} T29S R14W \\ S 4 | S 3 \\ \hline S 9 | S10 \\ 1937 \end{array}$$

alongside of

post, deposit a volcanic stone, 8x6x4 ins., marked X.

Land, rolling, with a general northeasterly exposure and drainage.

Soil, shallow light colored clay with a rocky surface, lying on volcanic bedrock; 4th rate.

Undergrowth, sagebrush, yellowtop, Russian thistle and weeds.

No timber.

Fair grazing land.

S.89°59'E., on a random line, between sections 3 and 10.

40.00 Set temporary $\frac{1}{4}$ section corner.

80.00 Intersect the N. and S. line, 8 links S. of the corner of sections 2, 3, 10 and 11.

Thence

S.89°57'W., on a true line, between sections 3 and 10.

Ascend gradual E. slope of rolling mountainous land, through dense short undergrowth.

36

SUBDIVISION OF T. 29 S., R. 14 W.

Chains

40.00 At base of abrupt ascent over ~~SE~~ slope of spur, 80 feet above section corner, bears NE. and SW.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked

$\frac{1}{4}$ $\frac{S3}{S19}$
1937

raise a mound

of stone, 3 ft. base, 2 ft. high, N. of corner.

62.20 Rocky spur, 320 ft. above the $\frac{1}{4}$ section corner, projects N.10°E.; descend steep NW. slope.

80.00 The corner of sections 3, 4, 9 and 10, 140 ft. below spur

Land, rolling, with a general northeasterly exposure and drainage; volcanic formation.
Soil, shallow light colored clay with a rocky surface, lying on volcanic bedrock; 4th rate.
Undergrowth, sagebrush, yellowtop, Russian thistle and weeds.
No timber.
Fair grazing land.

N.0°02'W., on a true line, between sections 3 and 4.

Descend steep rocky NW. slope of rolling mountainous land; through dense short undergrowth.

16.80 Wash; 20 links wide, 3 ft. deep, in draw, 130 ft. below corner, drains N.55°E.; ascend gradual rocky SE. slope.

28.30 Spur, 40 ft. above draw, projects E.; descend gradual NE. slope.

40.00 On gradual NE. slope, 40 ft. below spur.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked

$\frac{1}{4}$
S4 | S3
1937

raise a mound

of stone, 3 ft. base, 2 ft. high, W. of corner.

80.00 On general NE. slope, 50 ft. below the $\frac{1}{4}$ section corner.

Set an iron post, 3 ft. long, 1 in. diam., 24 ins. in the ground to solid rock, and in a large mound of stone to top, for corner of lots 4 and 5, section 3, and lots 1 and 8, section 4, with brass cap marked

1 | 4
S4 — S3
8 | 5
1937

alongside of

post, deposit a volcanic stone, 6x4x2 ins., marked X.

SUBDIVISION OF T. 29 S., R. 14 W.

Chains

391.16 Intersect the N. boundary of the township.

Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for closing corner of sections 3 and 4, T. 29 S., R. 14 W., with brass cap marked

T28S R14W
S 34

S 4 | S 3
T29S R14W
C C
1937

raise a mound
of stone, 3 ft. base, 2 ft. high, S. of corner.

From this corner the corner of sections 33 and 34, T. 28 S., R. 14 W., bears West, 7.86 chains distant, an iron post, 2 ins. diam., set, marked and witnessed, as described in the official record of the survey of T. 28 S., R. 14 W., of this group.

Land, rolling, with a general northeasterly exposure and drainage; volcanic formation.

Soil, shallow light colored clay, lying on bedrock; 4th rate.

Undergrowth, sagebrush, yellowtop, Russian thistle and weeds.

No timber.

Fair grazing land.

From the corner of sections 4, 5, 32 and 33, on the S. boundary of the township, an iron post, 2 ins. diam., set, marked and witnessed as described in the official record of the survey of T. 30 S., R. 14 W., of this group.

N.0°03'W., between sections 32 and 33.

Ascend gradual SE. slope of low rolling mountainous land, through dense timber and scattered short undergrowth.

10.20 Low spur, 20 ft. above corner, projects N.75°E.; continue ascent over SE. slope.

12.20 Draw, 20 ft. deep, drains N.75°E.; continue ascent.

37.50 Spur, 50 ft. above corner, projects SE.; descend gradual NE. slope.

40.00 On gradual NE. slope, 10 ft. below spur.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked

$\frac{1}{4}$
S32 | S33
1937

from which

A juniper, 4 ins. diam., bears S.82°45'E., 56 links dist., marked $\frac{1}{4}$ S33 BT.


A juniper, 10 ins. diam., bears S.71°15'W., 31 links dist., marked $\frac{1}{4}$ S32 BT

SUBDIVISION OF T. 29 S., R.14 W.

Chains

ant/10

- 41.90 Draw, 12 ft. below the $\frac{1}{4}$ section corner, drains S.30°E.; ascend broken SW. slope.
- 52.50 Bumble Bee Spring, a small spring of good water which flows easterly 1.50 chains distant into two concrete tanks, bears N.72°W. For direct tie see that given at the 47.15 chains point, on line between sections 29 and 32.
- 52.60 Top of volcanic spur, 170 ft. above draw, projects NE.; descend broken NW. slope.
- 70.50 Wash, 30 links wide, 3 ft. deep, in draw, 180 ft. below spur, drains N.70°E.; unimproved road in draw, bears SW. and N.70°E.; ascend broken SE. slope.
- 80.00 On broken SE. slope, 80 ft. above draw.
Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for corner of sections 28, 29, 32 and 33, with brass cap marked



from which

- A pinon, 10 ins. diam., bears N.72°E., 119 links dist., marked T29S R14W S28 BT
- A pinon, 6 ins. diam., bears S.32°E., 41 links dist., marked T29S R14W S33 BT
- A pinon, 4 ins. diam., bears S.76°45'W., 89 links dist., marked T29S R14W S32 BT
- A pinon, 6 ins. diam., bears N.57°15'W., 112 links dist., marked T29S R14W S29 BT

Land, rolling and mountainous, with a general easterly exposure and drainage; volcanic and limestone formation. Soil, shallow light colored clay and sand, with a rocky surface, lying on bedrock; 4th rate. Undergrowth, sage and bitter brush, mountain rush, yellowtop and weeds. Timber, juniper and pinon. Fair grazing land.

East, on a random line, between sections 28 and 33.

- 40.00 Set temporary $\frac{1}{4}$ section corner.
- 80.02 Intersect the N. and S. line, 3 links N. of the corner of sections 27, 28, 33 and 34.

Thence

N.89°59'W., on a true line, between sections 28 and 33.

Ascend along general bottom of wash draining E. from the W., through dense timber and scattered short undergrowth.

- 2.30 Leave bottom of wash, drains E. from the NW.; ascend gradually over general E. slope.

SUBDIVISION OF T. 29 S., R. 14 W.

Chains

- 34.70 Draw, 15 ft. deep, drains S.75°E.
 40.01 On general E. slope, 80 ft. above section corner.
 Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked

$$\frac{S\ 28}{\frac{1}{4}S\ 33}$$

$$\frac{1}{4}S\ 33$$

1937

from which

A pinon, 12 ins. diam., bears S.23°E., 60 links dist., marked $\frac{1}{4}$ S33 BT

A juniper, 4 ins. diam., bears N.35°W., 64 links dist., marked $\frac{1}{4}$ S28 BT

- 65.40 Slope changes from a gradual E. slope to a gradual SE. slope.
 73.70 Draw, 10 ft. deep, drains SE.
 80.02 The corner of sections 28, 29, 32 and 33, 220 ft. above the $\frac{1}{4}$ section corner.

Land, rolling and mountainous, with a general easterly exposure and drainage.

Soil, shallow light colored clay and sand, lying on a heavy clay subsoil; 4th rate.

Undergrowth, sage and bitter brush, mountain rush, yellowtop, Russian thistle and weeds.

Timber, juniper and pinon.

Fair grazing land.

N.0°03'W., between sections 28 and 29.

Ascend gradual SE. slope of rolling mountainous land, through dense timber and scattered short undergrowth.

- 12.80 Rocky spur, 190 ft. above corner, projects E.; descend abrupt broken NE. slope.
 27.80 Wash, 40 links wide, 5 ft. deep, in draw, 255 ft. below spur, drains E.; ascend steep SE. slope.
 30.20 Small draw, 10 ft. deep, drains SE.; thence ascend steep SW. slope.
 40.00 On steep SW. slope, 190 ft. above wash.
 Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground to solid rock, and in a large mound of stone to top, for $\frac{1}{4}$ section corner, with brass cap marked

$$\frac{1}{4}$$

$$S29\ | \ S28$$

1937

from which

A juniper, 12 ins. diam., bears S.87°45'E., 63 links dist., marked $\frac{1}{4}$ S28 BT

A pinon, 10 ins. diam., bears N.88°45'W., 126 links dist., marked $\frac{1}{4}$ S29 BT

SUBDIVISION OF T. 29 S., R. 14 W.

- Chains
 - 44.70 Rocky spur, 50 ft. above the $\frac{1}{4}$ section corner, projects W.; descend NW. slope.
 - 48.60 Head of draw, 40 ft. below spur, drains W.; ascend SW. slope.
 - 56.00 Spur, 30 ft. above head of draw, projects SE., and bears W.; thence along top of branch spur, projecting N.
 - 61.20 Leave top of spur, projects N.25°E.; descend steep NW. slope.
 - 71.60 Draw, 210 ft. below spur, drains NE.; ascend SE. slope.
 - 74.50 Low spur, 30 ft. above draw, projects E. about 5.00 chs. distant to end; descend gradual NE. slope.
 - 77.60 Junction of draws, 10 ft. below spur, drains E. from the W. and NW.; ascend SW. slope.
 - 80.00 On gradual SW. slope, 30 ft. above junction of draws.
- Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for corner of sections 20, 21, 28 and 29, with brass cap marked

T29S R14W
 S 20 | S 21

 S 29 | S 28
 1937

from which

- A pinon, 10 ins. diam., bears N.54°45'E., 146 links dist., marked T29S R14W S21 BT
- A juniper, 8 ins. diam., bears S.28°15'E., 194 links dist., marked T29S R14W S28 BT
- A juniper, 8 ins. diam., bears S.47°W., 68 links dist., marked T29S R14W S29 BT
- A pinon, 10 ins. diam., bears N.59°15'W., 158 links dist., marked T29S R14W S20 BT

Land, rolling and mountainous, with a general easterly exposure and drainage; volcanic formation. Soil, shallow light colored clay with a rocky surface, lying on bedrock; 4th rate. Undergrowth, sage and bitter brush, mountain rush, yellowtop and weeds. Timber, juniper and pinon. Fair grazing land.

- S.89°59'E., on a random line, between sections 21 and 28,
- 40.00 Set temporary $\frac{1}{4}$ section corner.
- 80.00 Intersect the corner of sections 21, 22, 27 and 28.
- thence
- N.89°59'W., on a true line; between sections 21 and 28.
- Ascend gradual SE. slope of rolling mountainous land, through dense timber and scattered short undergrowth.

SUBDIVISION OF T. 29 S., R. 14 W.

Chains

- 28.20 Small draw, 10 ft. deep, drains SE.; ascend gradual NE. slope.
- 40.00 On general NE. slope, 75 ft. above section corner.
Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked
- $\frac{1}{4}$ $\frac{S\ 21}{S\ 28}$
 1937
- from which
- A juniper, 12 ins. diam., bears N.18°E., 11 links dist., marked $\frac{1}{4}$ S21 BT
- A pinon, 10 ins. diam., bears S.7°W., 22 links dist., marked $\frac{1}{4}$ S28 BT
- 44.10 Enter top of spur, projects SE. from the W.; thence along top of spur.
- 54.00 Forks of spur, 20 ft. above spur, projects E. and SE. from N.80°W.; ascend gradually along S. slope.
- 65.00 Head of draw, 15 ft. deep, drains SE.; ascend gradual SE. slope.
- 74.00 Spur, 130 ft. above the $\frac{1}{4}$ section corner, projects S. about 10 chains distant to end; descend gradual SW. slope.
- 80.00 The corner of sections 20, 21, 28, and 29, 40 ft. below spur.
- Land, rolling and mountainous, with a general easterly and southeasterly exposure and drainage; volcanic formation.
Soil, shallow, light colored clay, with a rocky surface; 4th rate.
Undergrowth, sage and bitter brush, mountain rush, yellow top and weeds.
Timber, juniper and pinon.
Fair grazing land.
-
- N.0°03'W., between sections 20 and 21.
- Ascend gradual SW. slope of broken mountainous land, through dense timber and scattered short undergrowth.
- 8.00 Spur, 70 ft. above corner, projects S.70°E.; descend gradual N. slope.
- 13.00 Draw, 15 ft. below spur, drains NE.; ascend gradual SE. slope.
- 16.70 Spur, which forms the divide between Wah Wah Valley and the Escalante Desert, 35 ft. above draw, projects E. about 5.00 chains distant to end; descend gradual N. slope.
- 27.60 Draw, 50 ft. below spur, drains S.70°E.; ascend gradual SE. slope.
- 40.00 On top of spur, 70 ft. above draw, projects SE.

SUBDIVISION OF T. 29 S., R. 14 W.

Chains

Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground to solid rock, and in a large mound of stone to top, for $\frac{1}{4}$ section corner, with brass cap marked

↑
S20|S21
1937

from which

A pinon, 10 ins. diam., bears N.81°45'E., 215 links dist., marked $\frac{1}{4}$ S21 BT

A juniper, 6 ins. diam., bears N.10°15'W., 302 links dist., marked $\frac{1}{4}$ S20 BT

44.80 Draw, 20 ft. deep, drains SE.; ascend broken SW. slope.

68.40 Rocky volcanic spur, 390 ft. above draw, projects S.20°E.; thence along broken E. slope.

72.60 Spur, 470 ft. above draw, projects S.60°E.; timber becomes more dense, bears NE. and SW.; thence ascend gradually along E. slope.

80.00 On steep E. slope, 25 ft. above spur.

Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for corner of sections 16, 17, 20 and 21, with brass cap marked

T29S R14W
S17|S16
—|—
S20|S21
1937

from which

A pinon, 14 ins. diam., bears N.42°30'E., 80 links dist., marked T29S R14E S16 BT

A pinon, 6 ins. diam., bears S.50°30'E., 126 links dist., marked T29S R14E S21 BT

A pinon, 4 ins. diam., bears S.42°W., 17 links dist., marked T29S R14W S20 BT

A pinon, 14 ins. diam., bears N.40°W., 54 links dist., marked T29S R14W S17 BT

Land, broken and mountainous, with a general easterly exposure and drainage; volcanic formation.

Soil, shallow, light colored clay, with a rocky surface, lying on bedrock; 4th rate.

Undergrowth, sage and bitter brush, yellowtop, mountain rush and weeds.

Timber, juniper and pinon.

Fair grazing land.

S.89°59'E., on a random line, between sections 16 and 21.

40.00 Set temporary $\frac{1}{4}$ section corner.

SUBDIVISION OF T. 29 S., R. 14 W.

Chains

79.94 Intersect the ^{N. and S. line, 2 links S. of the} corner of sections 15, 16, 21 and 22.

Thence

West, on a true line, between sections 16 and 21.

Ascend gradual NE. slope of broken mountainous land, through scattered timber and dense short undergrowth.

32.30 Rocky spur, 580 ft. above corner, projects N.; descend gradual NW. slope.

39.97 On rocky NW. slope, 70 ft. below spur.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked

S 16
 $\frac{1}{4}$ ———
 S 21
 1937

raise a mound

of stone, 3 ft. base, 2 ft. high, N. of corner.

No suitable bearing trees available.

40.60 Draw, 10 ft. below the $\frac{1}{4}$ section corner, drains N.20°W.; ascend gradual NE. slope.

47.40 Spur, 65 ft. above draw, projects N. about 8.00 chains distant to end; descend gradual NW. slope.

54.20 Draw, 40 ft. below spur, drains N.30°E.; ascend abrupt E. slope.

75.40 Timber becomes dense, bears NE. and SW.

79.94 The corner of sections 16, 17, 20 and 21, 470 ft. above draw.

Land, broken and mountainous; with a general easterly and northerly exposure and drainage; volcanic formation. Soil, shallow light colored clay, lying on bedrock; 4th rate.

Undergrowth, sage and black brush, yellowtop, mountain rush and weeds.

Timber, juniper and pinon.

Fair grazing land.

N.0°03'W., between sections 16 and 17.

Ascend gradually along steep E. slope of broken mountainous land, through dense timber and undergrowth.

11.50 Top of ascent, 40 ft. above corner, bears E. and W.; descend gradually along E. slope.

32.20 Rocky spur, 50 ft. below top of ascent, projects N.75°E.; descend abrupt N. slope.

40.00 On steep N. slope, 230 ft. below top of spur.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked

SUBDIVISION OF T. 29 S., R. 14 W.

Chains

1/2
S17/S16
1937

angle 10

from which

- A juniper, 8 ins. diam., bears S.69°30'E., 54 links dist., marked 1/2 S16 BT
- A pinon, 8 ins. diam., bears S.83°W., 54 links dist., marked 1/2 S17 BT

- 43.80 Draw, 110 ft. below the 1/2 section corner, drains NE.; ascend steep rocky SE. slope.
- 53.00 Rocky volcanic spur, 320 ft. above draw, projects N.75°E descend along steep NE. slope.
- 57.30 Draw, 40 ft. deep, drains N.70°E.; continue descent over steep NE. slope.
- 80.00 On steep NE. slope. 370 ft. below spur.

Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for corner of sections 8, 9, 16 and 17, with brass cap marked

T29S R14W
S 8 | S 9
S 17 | S 16
1937

from which

- A pinon, 6 ins. diam., bears N.56°E., 29 links dist., marked T29S R14W S9 BT
- A juniper, 6 ins. diam., bears S.26°E., 51 links dist., marked T29S R14W S16 BT
- A pinon, 8 ins. diam., bears S.74°W., 28 links dist., marked T29S R14W S17 BT
- A pinon, 10 ins. diam., bears N51°30'W., 72 links dist., marked T29S R14W S8 BT

Land, broken and mountainous, with a general easterly and northeasterly exposure and drainage. Soil, shallow light colored clay with a rocky surface, lying on bedrock; 4th rate. Undergrowth, sage, black and bitter brush, mountain rush, yellowtop and weeds. Timber, scrub juniper and pinon. Fair grazing land.

- 40.00 East, on a random line, between sections 9 and 16. Set temporary 1/2 section corner.
- 79.96 Intersect the N. and S. line, 10 links N. of the corner of sections 9, 10, 15 and 16. Thence N.89°56'W., on a true line, between sections 9 and 16. Ascend steep rocky SE. slope of broken mountainous land, through scattered timber and undergrowth.

SUBDIVISION OF T. 29 S., R. 14 W.

Chains

- 5.70 Rocky spur, 140 ft. above corner, projects S.; descend abrupt SW. slope.
- 11.70 Draw, 155 ft. below spur, drains S.20°E., about 10.00 chains distant, thence easterly; ascend steep E. slope.
- 19.00 Ascent becomes gradual, bears N. and S.
- 31.60 Spur, 225 ft. above draw, projects N.20°W.; descend steep SW. slope.
- 39.98 In bottom of draw, 110 ft. below spur, drains N.30°W.

Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground to solid rock, and in a large mound of stone to top, for $\frac{1}{4}$ section corner, with brass cap marked

S 9

$\frac{1}{4}$ —

S16

1937

Alongside of post deposit a volcanic stone, 10x8x6 ins. marked X.

No suitable bearing trees available.

Ascend rocky NE. slope.

- 58.80 Rocky spur, 270 ft. above the $\frac{1}{4}$ section corner, projects N.; descend steep NW. slope.
- 65.20 Enter dense timber, bears N.20°E. and S.20°W.
- 67.70 Draw, 100 ft. below spur, drains N.20°E.; ascend steep NE. slope.
- 79.96 The corner of sections 8, 9, 16 and 17, 150 ft. above draw.

Land, broken and mountainous, with a general northerly and easterly exposure and drainage; volcanic formation. Soil, shallow sand and gravel with rocky surface, lying on bedrock; 4th rate.

Undergrowth, sage, black, and bitter brush, yellowtop and weeds.

Timber, juniper and pinon.

Fair grazing land.

N.0°03'W., between sections 8 and 9.

Descend steep NE. slope of broken mountainous land, through dense timber and scattered short undergrowth.

- 8.00 Draw, 30 ft. below corner, drains E.; ascend steep SE. slope.
- 24.50 Head of draw, 40 ft. deep, drains E.
- 30.00 Rocky volcanic spur, 310 ft. above draw, projects N.70°E.; descend abrupt N. slope.
- 40.00 On steep N. slope, 330 ft. below spur.

Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground to solid rock, and in a large mound of stone to top, for $\frac{1}{4}$ section corner, with brass cap marked

SUBDIVISION OF T. 22 S., R. 14 W.

Chains

$\frac{1}{4}$
S 8 | S 9
1937

from which

A juniper, 6 ins. diam., bears S. 84° E., 8 links dist., marked $\frac{1}{4}$ S 9 BT

A pinon, 10 ins. diam., bears S. 42° W., 17 links dist., marked $\frac{1}{4}$ S 8 BT

- 41.50 Slope changes from a steep N. slope to steep NE. slope.
 - 50.00 Draw, 110 ft. below the $\frac{1}{4}$ section corner, drains N. 70° E. ascend steep SE. slope.
 - 63.80 Top of abrupt ascent, bears S. 60° W. and N. 25° E.; ascend gradually along general E. slope, through scattered timber, bearing E. and W.
 - 80.00 On top of spur, 365 ft. above draw, projects E. and bears SW.
- Set an iron post, 3 ft. long, 2 ins. diam., 10 ins. in the ground to solid rock, and in a large mound of stone to top, for the corner of sections 4, 5, 8 and 9, with brass cap marked

T29S R14W
S 5 | S 4
S 8 | S 9
1937

Alongside of post deposit a volcanic stone 10x8x8 ins. marked X.

No suitable bearing trees available.

Land, broken and mountainous, with a general easterly exposure and drainage; volcanic formation.
Soil, shallow sand mixed with rock and gravel, lying on bedrock; 4th rate.
Undergrowth, sage, black and bitter brush, mountain rush, yellowtop and weeds.
Timber, juniper and pinon.
Fair grazing land.

- 40.00 S. 89° 56' E., on a random line, between sections 4 and 9. Set temporary $\frac{1}{4}$ section corner.
- 79.96 Intersect the N. and S. line, 2 links N. of the corner of sections 3, 4, 9 and 10.
Thence
N. 89° 55' W., on a true line, between sections 4 and 9.
Descend gradual NW. slope of broken mountainous land, through very scattered timber and medium dense short undergrowth.
- 6.00 Swale, 25 ft. below corner, drains N.; ascend gradual NE. slope.
- 11.00 Low spur, 10 ft. above swale, projects N. 20° E.; descend gradual NW. slope.

SUBDIVISION OF T. 29 S., R. 14 W.

Chains

28.80 Draw, 15 ft. below spur, drains N.20°E.; ascend gradual SE. slope.

31.00 Ascent becomes more abrupt, bears N. and S.

59.98 On steep SE. slope, 110 ft. above draw.

Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground to solid rock, and in a large mound of stone to top, for $\frac{1}{4}$ section corner, with brass cap marked

S 4
 $\frac{1}{4}$ —
S 9
1937

Alongside of post deposit a volcanic stone, 10x10x6 ins. marked X.

No suitable bearing trees available.

52.40 Spur, projects N.60°E. and bears W.; thence ascend abruptly along general top of spur.

78.50 Ascent along top of spur becomes gradual, bears N. and S.

79.96 The corner of sections 4, 5, 8 and 9, 550 ft. above the $\frac{1}{4}$ section corner.

Land, broken and mountainous, with a general easterly and northeasterly exposure and drainage; volcanic formation.

Soil, shallow clay and sand mixed with rock and gravel, lying on bedrock; 4th rate.

Undergrowth, sage, black and bitter brush, yellowtop, mountain rush and weeds.

Timber, juniper and pinon.

Fair grazing land.

N.0°03'W., on a true line, between sections 4 and 5.

Descend gradual N. slope of broken mountainous land, through scattered timber and dense short undergrowth.

2.30 Descent becomes abrupt, bears E. and W.

31.10 Wash, 30 links wide, 4 ft. deep, in draw, 665 ft. below section corner, drains N.70°E.; ascend gradual S. slope.

40.00 On gradual S. slope, 50 ft. above draw.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked

$\frac{1}{4}$
S5 | S4
1937

raise a mound

of stone, 3 ft. base, 2 ft. high, W. of corner.

No suitable bearing trees available.

41.90 Spur, 10 ft. above the $\frac{1}{4}$ section corner, projects N.80°E.; descend gradual N. slope.


50.00 Draw, 80 ft. below spur, drains NE.; ascend gradual S. slope.

SUBDIVISION OF T. 29 S., R. 14 W.

Chains

59.90 Ascent becomes abrupt, bears NE. and SW. 03.33
80.00 On top of spur, 500 ft. above draw, projects NE.

Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground to solid rock, and in a large mound of stone to top, for corner of lots 4 and 5, section 4, and lots 1 and 8, section 5, with brass cap marked




from which

- A juniper, 6 ins. diam., bears N.65°15'E., 61 links dist., marked L4 S4 BT
- A juniper, 4 ins. diam., bears S.61°45'W., 100 links dist., marked L8 S5 BT
- A juniper, 4 ins. diam., bears N.70°W., 32 links dist., marked L1 S5 BT

No suitable bearing trees available to the SE.
Thence descend steep NW. slope.

91.06 On steep NW. slope, 110 ft. below spur.

Intersect the N. boundary of the township.
Set an iron post, 3 ft. long, 2 ins. diam., 15 ins. in the ground, to solid rock and in a large mound of stone to top, for closing corner of sections 4 and 5, T. 29 S. R. 14 W., with brass cap marked



from which

- A juniper, 12 ins. diam., bears S.52°45'E., 66 links dist., marked T28S R14W S4 CC BT
- A juniper, 8 ins. diam., bears S.34°30'W., 135 links dist., marked T29S R14W S5 CC BT

From this corner the corner of sections 32 and 33, T. 28 S., R. 14 W., bears West, 7.96 chains distant, and iron post, 2 ins. diam., set, marked and witnessed as described in the official record of the survey of T. 28 S., R. 14 W., of this group.

Land, broken and mountainous, with a general northeasterly and southeasterly exposure and drainage; volcanic formation.
Soil, shallow light colored clay and sand, mixed with rock and gravel, lying on bedrock; 4th rate.
Undergrowth, sage, black and bitter brush, mountain rush, yellowtop, mountain mahogany and weeds.
Timber, juniper and pines.
Fair grazing land.

SUBDIVISION OF T. 29 S., R. 14 W.

Chains

From the corner of sections 5, 6, 31 and 32, on the S. boundary of the township, an iron post, 2 ins. diam., set, marked and witnessed as described in the official record of the survey of T. 30 S., R. 14 W., of this group.

N.0°03'W., between sections 31 and 32.

Descend along NW. slope of broken mountainous land, through dense timber and scattered short undergrowth.


8.80 Draw, 100 ft. below corner, drains W.; ascend gradual S. slope.

12.30 Spur, 30 ft. above draw, projects W.; descend gradual N. slope.

13.20 Small sandy draw, 15 ft. below spur, drains NW. from the E.; continue gradual descent over NW. slope.

40.00 On rolling NW. slope, 180 ft. below section corner.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for 1/4 section corner, with brass cap marked



from which

A pinon, 8 ins. diam., bears N.76°15'E., 76 links distant, marked 1/4 S32 BT

A juniper, 10 ins. diam., bears S.64°15'W., 74 links distant, marked 1/4 S31 BT


53.50 Bottom of wide draw, 10 ft. below the 1/4 section corner, drains SW.; ascend gradual SE. slope.

71.30 Top of rise, 50 ft. above draw, bears NW. and SE.; descend gradual NE. slope.

74.60 Small draw, 20 ft. below rise, drains SE.; ascend gradual SE. slope.

80.00 On gradual SE. slope, 40 ft. above draw.

Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for corner of sections 29, 30, 31 and 32, with brass cap marked



from which

A pinon, 10 ins. diam., bears N.37°30'E., 120 links dist., marked T29S R14W S29 BT

A pinon, 10 ins. diam., bears S.71°45'E., 92 links dist., marked T29S R14W S32 BT

A juniper, 10 ins. diam., bears S.29°30'W., 223 links dist., marked T29S R14W S31 BT

A pinon, 10 ins. diam., bears N.61°15'W., 92 links dist., marked T29S R14W S30 BT

SUBDIVISION OF T. 29 S., R. 14 W.

Chains

Land, broken and mountainous, with a general southwest-
erly exposure and drainage; limestone and volcanic for-
mation.

Soil, shallow light colored sand and clay, lying on
bedrock; 4th rate.

Undergrowth, sage and bitter brush, mountain rush,
yellowtop and weeds.

Timber, juniper and pinon.

Fair grazing land.

East, on a random line, between sections 29 and 32.

40.00 Set temporary $\frac{1}{4}$ section corner.

79.90 Intersect the N. and S. line, 9 links S. of the
corner of sections 28, 29, 32 and 33.

Thence

S. 89° 56' W., on a true line, between sections 29 and 32.

Ascend gradual SE. slope of broken mountainous land,
through dense timber and medium dense short undergrowth.

16.70 Spur, 100 ft. above corner, projects S.; descend gradual
SW. slope.

20.70 Draw, 20 ft. below spur, drains SE. from the N.;
ascend gradual SE. slope.

39.95 On gradual SE. slope, 200 ft. above draw.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in
the ground, for $\frac{1}{4}$ section corner, with brass cap marked

S 29

$\frac{1}{4}$ ———

S 32

1937

from which.

A juniper, 6 ins. diam., bears N. 47° 15' E., 131 links
dist., marked $\frac{1}{4}$ S29 BT

A pinon, 8 ins. diam., bears S. 1° 45' W., 118 links
dist., marked $\frac{1}{4}$ S32 BT

47.15 Top of red rocky ridge, 110 ft. above the $\frac{1}{4}$ section
corner, bears NE. and SW. From this point Bumble Bee
Spring bears S. 49° 51' E., 27.04 chains dist.,
For description of spring, see that given on line
between sections 32 and 33; descend gradual NW. slope.

59.50 Sandy wash, 10 links wide, 1 ft. deep, in draw, 225 ft.
below ridge, drains N.; ascend gradual broken SE. slope.

79.90 The corner of sections 29, 30, 31 and 32, 170 ft. above
draw.

Land, broken and mountainous, with a general southeast-
erly and northeasterly exposure and drainage; sandstone
and volcanic formation.

SUBDIVISION OF T. 29 S., R. 14 W.

Chains

Soil, shallow light colored sand and clay with a rocky surface; 4th rate.
 Undergrowth, sage and bitter brush, yellowtop, mountain rush, weeds and grass.
 Timber, juniper and pinon.
 Fair grazing land.

West, on a random line, between sections 30 and 31.

40.00 Set temporary $\frac{1}{4}$ section corner.

80.03 Intersect the corner of sections 25, 30, 31 and 36, on the W. boundary of the township, heretofore described.

Thence

East, on a true line, between sections 30 and 31.

Descend gradual SE. slope of broken mountainous land, through dense timber and short undergrowth.

17.60 Swale, 80 ft. below corner, drains SW.; ascend gradual SW. slope.

28.40 Slope changes from a SW. slope to a broken S. slope.

37.00 Spur, 80 ft. above swale, slopes SW.; descend gradual SE. slope.

40.03 On SE. slope of surface rock, 35 ft. below spur, mark a cross (X) over which

Set an iron post, 3 ft. long, 1 in. diam., in a large mound of stone to top, for $\frac{1}{4}$ section corner, with brass cap marked

S 30
 $\frac{1}{4}$ ———
 S 31
 1937

from which

A pinon, 10 ins. diam., bears S.7°45'E., 143 links dist., marked $\frac{1}{4}$ S31 BT

A pinon, 10 ins. diam., bears N.15°30'W., 150 links dist., marked $\frac{1}{4}$ S30 BT

42.00 Draw, 10 ft. below corner, drains SW.; ascend rocky NW. slope.

47.40 Spur, 80 ft. above draw, projects S.60°W.; thence ascend broken W. slope.

58.80 Ridge, 120 ft. above draw, bears NE. and SW.; descend gradual NE. slope.

68.00 Draw, 170 ft. below ridge, drains S.10°E.; ascend gradual SW. slope.

74.60 Rise, 15 ft. above draw, bears N. and SE.; descend gradual SE. slope.

80.03 The corner of sections 29, 30, 31, and 32, 70 ft. below top of rise.

Land, broken and mountainous, with a general southwest-

SUBDIVISION OF T. 29 S., R. 14 W.

Chains

enied9

erly exposure and drainage; sandstone and volcanic formation.
 Soil, shallow loose sand and clay, with a rocky surface; 4th rate.
 Undergrowth, sage and bitter brush, mountain brush, yellowtop and grass.
 Timber, juniper and pinon.
 Fair grazing land.

N.0°03'W., between sections 29 and 30.

Ascend gradual SE. slope of broken mountainous land, through medium dense timber and undergrowth.

16.80 Spur, 120 ft. above corner, projects E. and bears W. about 10.00 chains distant to rocky knoll; descend gradual N. slope.

22.30 Draw, 120 ft. below spur, drains E.; and heads W. about 15.00 chains distant, at base of twin knolls; ascend rocky S. slope.

27.10 Rocky spur, 60 ft. above draw, projects S.80°E.; descend N. slope.

40.00 On gradual N. slope, 100 ft. below spur.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked

$\frac{1}{4}$
 S30 | S29
 1937

from which

A juniper, 10 ins. diam., bears N.87°E., 35 links dist., marked $\frac{1}{4}$ S29 BT

A pinon, 8 ins. diam., bears N.61°W., 30 links dist., marked $\frac{1}{4}$ S30 BT

44.10 Swale, 30 ft. below the $\frac{1}{4}$ section corner, drains E.; ascend broken S. slope.

57.00 Spur, 90 ft. above swale, projects SE. from the N.; ascend along top of spur.

70.80 Junction of spur projecting S. with rocky knoll on top of divide ridge, between the drainage to the N. into Wah Wah Valley, and the drainage to the S. into the Escalante Desert, 400 ft. above swale, bears E. and NW.; descend rocky NE. slope.

80.00 On rocky NE. slope, 40 ft. below knoll.

Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for corner of sections 19, 20, 29 and 30, with brass cap marked

T29S R14W
 S 19 | S 20
 S 30 | S 29
 1937

from which

SUBDIVISION OF T. 29 S., R. 14 W.

Chains

A pinon, 10 ins. diam., bears N.40°E., 26 links
dist., marked T29S R14W S20 BT

A pinon, 6 ins. diam., bears S.32°45'E., 23 links
dist., marked T29S R14W S29 BT

A pinon, 8 ins. diam., bears S.71°45'W., 32 links
dist., marked T29S R14W S30 BT

A pinon, 6 ins. diam., bears N.56°W., 57 links
dist., marked T29S R14W S19 BT

Land, broken and mountainous, with a general easterly exposure and drainage; volcanic formation.

Soil, shallow light colored clay and sand, with a rocky surface; 4th rate.

Undergrowth, sage and bitter brush, mountain rush, yellow top and weeds.

Timber, juniper and pinon.

Fair grazing land.

N.89°56'E., on a random line, between sections 20 and 29.

40.00 Set temporary $\frac{1}{4}$ section corner.

79.88 Intersect the corner of sections 20, 21, 28 and 29.

Thence

S.89°56'W., on a true line, between sections 20 and 29.

Descend gradual SW. slope of broken mountainous land, through dense timber and medium dense undergrowth.

1.10 Small draw, 15 ft. below corner, drains S.30°E.; ascend gradual NE. slope.

9.40 Small spur, 130 ft. above draw, projects SE.; descend gradual SW. slope.

18.80 Draw, 40 ft. below spur, drains SE.; ascend NE. slope.

35.00 Enter top of spur, projects SE. from the W.; thence along top of spur.

39.94 On top of spur, projecting E., 190 ft. above draw.

Set an iron post, 3 ft. long, 1 in. diam., 15 ins. in the ground, to solid rock, and in a large mound of stone to top, for $\frac{1}{4}$ section corner, with brass cap marked

S 20
 $\frac{1}{4}$ S 29
1937

from which

A pinon, 6 ins. diam., bears N.49°45'E., 105 links
dist., marked $\frac{1}{4}$ S20 BT

A pinon, 5 ins. diam., bears S.40°E., 58 links
dist., marked $\frac{1}{4}$ S29 BT

45.30 Junction of spur projecting E. with the top of divide ridge between the drainage to the N. into Wah Wah Valley and the drainage to the S. into the Escalante Desert, 30 ft. above the $\frac{1}{4}$ section corner, bears NE. and SW.; descend gradual NW. slope.

SUBDIVISION OF T. 29 S., R. 14 W.

| Chains | Description |
|--|--|
| 54.20 | Junction of draws, 50 ft. below ridge, drains N. 80° E. from the W. and S. 80° W.; thence along bottom of draw. |
| 60.30 | Leave draw, drains E. from N. 80° W.; ascend NE. slope. |
| 71.30 | Top of ascent, 125 ft. above junction of draws, slopes descend gradual SW. slope. |
| 74.80 | Small draw, 20 ft. below top of ascent, drains S. 60° E.; ascend steep NE. slope. |
| 79.88 | The corner of sections 19, 20, 29 and 30, 110 ft. above draw. |
| <p>Land, broken and mountainous, with a general easterly exposure and drainage; volcanic formation. Soil, shallow loose sand and clay, with a rocky surface; 4th rate. Undergrowth, sage and bitter brush, mountain rush, weeds and grass. Timber, juniper and pinon. Fair grazing land.</p> | |
| <p>West, on a random line, between sections 19 and 30.</p> | |
| 40.00 | Set temporary $\frac{1}{4}$ section corner. |
| 79.90 | Intersect the W. boundary of the township, 3 links N. of the corner of sections 19, 24, 25 and 30, heretofore described. |
| <p>Thence</p> | |
| <p>N. 89° 59' E., on a true line, between sections 19 and 30.</p> | |
| <p>Ascend gradual SW. slope of broken mountain land, through dense timber and scattered undergrowth.</p> | |
| 7.60 | Spur, 60 ft. above corner, projects SE.; descend gradual NE. slope. |
| 15.30 | Draw, 80 ft. below spur, drains SE.; ascend gradual SW. slope. |
| 39.90 | On gradual SW. slope, 290 ft. above draw. |
| <p>Set an iron post, 3 ft. long, 1 in. diam., 15 ins. in the ground to solid rock, and in a mound of stone to top, for $\frac{1}{4}$ section corner, with brass cap marked</p> | |
| <p style="text-align: center;">S 19 $\frac{1}{4}$ ——— S 30 1937</p> | |
| <p style="text-align: right;">from which</p> | |
| <p>A pinon, 8 ins. diam., bears S. 10° 30' E., 112 links dist., marked $\frac{1}{4}$ S30 BT</p> | |
| <p>A pinon, 6 ins. diam., bears N. 4° 15' W., 13 links dist., marked $\frac{1}{4}$ S19 BT</p> | |
| 46.00 | Ridge, 40 ft. above the $\frac{1}{4}$ section corner, bears N. and S. descend gradually along S. slope of high ridge to the N. |
| 73.80 | Top of divide ridge between the drainage to the N. into the Wah Wah Valley, and the drainage to the S. into the |

SUBDIVISION OF T. 29 S., R. 14 W.

Chains

Escalante Desert, 235 ft. below last ridge, bears N. and S.; descend NE. slope.

79.90 The corner of sections 19, 20, 29 and 30, 110 ft. below divide.

Land, broken and mountainous, with a general southerly exposure and drainage; volcanic formation.

Soil, shallow loose sand and clay, lying on bedrock; 4th rate.

Undergrowth, sage and bitter brush, mountain rush, yellowtop and weeds.

Timber, juniper and pinon.

Fair grazing land.

N.0°03'W., between sections 19 and 20.

Along NE. slope of broken mountainous land, through dense timber and scattered short undergrowth.

5.00 Slope changes from a NE. to a SE. slope.

40.00 On SE. slope, near top of high ridge, 550 ft. above corner.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked

$\frac{1}{4}$
S19 | S20
1937

from which

A pinon, 4 ins. diam., bears N.30°45'E., 27 links dist., marked $\frac{1}{4}$ S20 BT

A pinon, 4 ins. diam., bears N.49°30'W., 56 links dist., marked $\frac{1}{4}$ S19 BT

41.00 Enter rolling top of high volcanic ridge, 20 ft. above the $\frac{1}{4}$ section corner, bears NE. and SW.; thence over rolling top of ridge.

47.00 Leave rolling top of ridge, bears NE. and SW.; descend abrupt NE. slope.

80.00 On broken NE. slope, 360 ft. below ridge.

Set an iron post, 3 ft. long, 2 ins. diam., 15 ins. in the ground, to solid rock, and in a large mound of stone to top, for corner of sections 17, 18, 19 and 20, with brass cap marked

T29S R14W
S 18 | S 17
S 19 | S 20

1937

from which

A pinon limb, 6 ins. diam., bears N.31°45'E., 107 links distant, marked T29S R14W S17 BT

A pinon, 8 ins. diam., bears S44°15'E., 120 links distant, marked T29S R14W S20 BT

SUBDIVISION OF T. 293S., R. 14 W.

Chains

A pinon, 8 ins. diam., bears S.49°15'W., 42 links dist., marked T29S R14W S19 BT

A pinon, 10 ins. diam., bears N.10°45'W., 109 links dist., marked T29S R14W S18 BT

Land, broken and mountainous, with a general northeasterly and southeasterly exposure and drainage; volcanic formation.

Soil, shallow light colored clay and sand with rocky surface; 4th rate.

Undergrowth, sage and bitter brush, mountain rush, yellowtop and weeds.

Timber, juniper and pinon.

Fair grazing land.

N.89°56'E., on a random line, between sections 17 and 20

40.00 Set temporary $\frac{1}{4}$ section corner.

79.94 Intersect the N. and S. line, 2 links N. of the corner of sections 16, 17, 20 and 21.

Thence

S.89°57'W., on a true line, between sections 17 and 20.

Ascend abrupt E. slope of broken mountainous land, through dense timber and scattered short undergrowth.

8.50 Spur, 150 ft. above corner, projects SE. from the SE. point of a wide rolling top of ridge; descend gradually along broken SW. slope near rim of ridge.

24.20 Head of draw, 60 ft. below spur, drains SE.; ascend gradual SE. slope.

32.30 Enter top of high ridge, 60 ft. above head of draw, bears N.80°E. and SW.; thence over rolling top of ridge.

39.97 On W. rim of ridge, bears NE. and SW.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked

S 17

$\frac{1}{4}$ ———

S 20

1937

from which

A pinon, 10 ins. diam., bears N.79°30'E., 30 links dist., marked $\frac{1}{4}$ S17 BT

A pinon, 14 ins. diam., bears S.45°W., 26 links dist., marked $\frac{1}{4}$ S20 BT

Descend gradual NW. slope.

44.00 Head of draw, 30 ft. below the $\frac{1}{4}$ section corner, drains NW.; ascend gradual NE. slope.

55.80 Rocky spur, 200 ft. above head of draw, projects NW.; descend abrupt NW. slope.

73.60 Draw, 210 ft. below spur, drains NW.; ascend gradual rocky NE. slope.

SUBDIVISION OF T. 29 S. R. 14 W.

| Chains | |
|--------|---|
| 79.94 | <p>The corner of sections 17, 18, 19 and 20, 70 ft. above draw.</p> <p>Land, broken and mountainous, with a general southeasterly and northwesterly exposure and drainage; volcanic formation.</p> <p>Soil, shallow light colored clay and sand with a rocky surface; 4th rate.</p> <p>Undergrowth, sage and bitter brush, mountain rush, yellowtop and weeds.</p> <p>Timber, juniper and pinon.</p> <p>Fair grazing land.</p> |
| 40.00 | <p>S.89°55'W., on a random line, between sections 18 and 19.</p> <p>Set temporary $\frac{1}{4}$ section corner.</p> |
| 79.75 | <p>Intersect the W. boundary of the township, 3 links S. of the corner of sections 13, 18, 19 and 24, heretofore described.</p> <p>Thence</p> |
| 5.00 | <p>N.89°56'E., on true line, between sections 18 and 19.</p> <p>Descend gradual NE. slope of broken mountainous land, through dense timber and scattered short undergrowth.</p> <p>Draw, 50 ft. below corner, drains N.5°W.; ascend gradual W. slope.</p> |
| 19.70 | <p>Rocky spur, 210 ft. above draw, projects N.20°W.; descend steep SE. slope.</p> |
| 32.50 | <p>Draw, 140 ft. below spur, drains N.10°W.; ascend steep rocky W. slope.</p> |
| 39.75 | <p>On steep rocky W. slope, 170 ft. above draw.</p> <p>Set an iron post, 3 ft. long, 1 in. diam., 24 ins. in the ground, to solid rock, and in a large mound of stone to top, for $\frac{1}{4}$ section corner, with brass cap marked</p> <div style="text-align: center;"> <p>S 18</p> <p>$\frac{1}{4}$ ———</p> <p>S 19</p> <p>1937</p> </div> <p style="text-align: right;">from which</p> <p>A pinon, 7 ins. diam., bears N.39°15'E., 28 links dist., marked $\frac{1}{4}$ S 18 BT</p> <p>A pinon, 6 ins. diam., bears S.40°E., 25 links dist., marked $\frac{1}{4}$ S 19 BT</p> |
| 64.00 | <p>Top of high rocky spur, 510 ft. above the $\frac{1}{4}$ section corner, projects N.; descend abrupt NE. slope.</p> |
| 79.75 | <p>The corner of sections 17, 18, 19 and 20, 340 ft. below spur.</p> <p>Land, broken and mountainous, with a general northerly exposure and drainage; volcanic formation.</p> <p>Soil, shallow light colored clay and sand, with a rocky surface; 4th rate.</p> <p>Undergrowth, sage, black, and bitter brush, mountain rush, yellowtop and weeds.</p> |

SUBDIVISION OF T. 29 S., R. 14 W.

Chains

Timber, juniper and pinon.
Fair grazing land.

N.0°03'W., between sections 17 and 18.

Descend NE. slope of broken mountainous land, through medium dense timber and short undergrowth.

13.90 Draw, 160 ft. below corner, drains NW.; continue descent along NW. slope.

35.80 Recross draw, drains N.10°E.; descend along gradual NE. slope.

40.00 On gradual NE. slope, near bottom of draw, 350 ft. below section corner.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked

$\frac{1}{4}$
 S18 | S17
 1937

from which

A juniper, 8 ins. diam., bears S.76°45'E., 90 links dist., marked $\frac{1}{4}$ S17 BT

A pinon, 14 ins. diam., bears S.46°15'W., 51 links dist., marked $\frac{1}{4}$ S18 BT

41.10 Recross draw, 20 ft. below the $\frac{1}{4}$ section corner, drains NW.; ascend gradually over broken SW. slope.

50.90 Spur, 100 ft. above draw, projects NW.; descend steep rocky NE. slope.

57.80 Draw, 160 ft. below spur, drains NW.; ascend steep rocky SW. slope.

73.50 Rim of draw, 30 ft. high, bears NW. and E.

75.00 Spur, 180 ft. above draw, slopes NW.; descend gradually along NW. slope near top of spur.

80.00 On gradual NW. slope, 30 ft. below top of spur.

Set an iron post, 3 ft. long, 2 ins. diam., 20 ins. in the ground to solid rock, and in a large mound of stone to top, for corner of sections 7, 8, 17 and 18, with brass cap marked

T29S R14W
 S 7 | S 8
 S 18 | S 17
 1937

from which

A pinon, 4 ins. diam., bears N.47°30'E., 29 links dist., marked T29S R14W S8 BT

A pinon, 10 ins. diam., bears S.49°E., 38 links dist., marked T29S R14W S17 BT

A juniper, 10 ins. diam., bears S.37°15'W., 33 links dist., marked T29S R14W S18 BT

SUBDIVISION OF T. 29 S., R. 14 W.

Chains

A juniper, 5 ins. diam., bears N.37°15'W., 20 links dist., marked T29S R14W S7 BT

Land, broken and mountainous, with a general northwesterly exposure and drainage; volcanic formation. Soil, shallow light colored clay and sand, lying on bedrock; 4th rate. Undergrowth, sage, black, and bitter brush, mountain rush, yellowtop and weeds. Timber, juniper and pinon. Fair grazing land.

N.89°57'E., on a random line, between sections 8 and 17.

40.00 Set temporary $\frac{1}{4}$ section corner.

79.86 Intersect the N. and S. line, 9 links S. of the corner of sections 8, 9, 16 and 17.

Thence

S.89°53'W., on a true line, between sections 8 and 17.

Ascend steep NE. slope of broken mountainous land, through dense timber and scattered short undergrowth.

14.30 Ascent becomes more gradual, bears N. and S.; thence ascend gradual E. slope.

30.30 Ridge, 480 ft. above corner, bears N.29°E. and S.20°W.; descend gradual W. slope.

38.00 Descent becomes abrupt, bears N. and S.

39.93 On abrupt W. slope, 120 ft. below ridge.

Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground to solid rock, and in a large mound of stone to top, for $\frac{1}{4}$ section corner, with brass cap marked

S 8

$\frac{1}{4}$ —

S17

1937

from which

A pinon, 12 ins. diam., bears N.22°E., 7 links dist., marked $\frac{1}{4}$ S8 BT

A pinon, 10 ins. diam., bears S13°E., 46 links dist., marked $\frac{1}{4}$ S17 BT

46.00 Draw, 200 ft. below the $\frac{1}{4}$ section corner, drains N.30°W.; ascend steep NE. slope.

53.00 Spur, 140 ft. above draw, projects N.; descend steep NW. slope.

61.50 Draw, 220 ft. below spur, drains N.20°E.; ascend steep NE. slope.

77.80 Spur, 450 ft. above draw, projects N.20°E.; descend gradual NW. slope.

79.86 The corner of sections 7, 8, 17 and 18, 10 ft. below spur.

Land, broken and mountainous, with a general northerly and northeasterly exposure and drainage; volcanic formation.

SUBDIVISION OF T. 29 S., R. 14 W.

Chains

Soil, shallow light colored clay and sand, with a rocky surface; 4th rate.
 Undergrowth, sage, black, and bitter brush, mountain rush, yellowtop and weeds.
 Timber, juniper and pinon.
 Fair grazing land.

S.89°56'W., on a random line, between sections 7 and 18.

40.00 Set temporary $\frac{1}{4}$ section corner.

79.76 Intersect the W. boundary of the township, 5 links S. of the corner of sections 7, 12, 15 and 18, heretofore described.

Thence

N.89°58'E., on a true line, between sections 7 and 18.

Ascend steep rocky W. slope of rough mountainous land, through dense timber and scattered short undergrowth.

6.10 Rocky spur, 140 ft. above corner, projects N.5°E.; descend steep NE. slope.

11.00 Draw, 140 ft. below spur, drains N.15°E.; ascend steep rocky NW. slope.

14.80 Rocky spur, 90 ft. above draw, projects N.10°E., about 6.00 chains distant to end; descend steep NE. slope.

22.00 Wash, 20 links wide, 2 ft. deep, in draw, 160 ft. below spur, drains N.10°W.; ascend steep NW. slope.

39.76 On steep NW. slope, 190 ft. above draw.

Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground to solid rock, and in a large mound of stone to top, for $\frac{1}{4}$ section corner, with brass cap marked

S 7

$\frac{1}{4}$ ———
 S18

1937

from which

A pinon, 11 ins. diam., bears N.50°E., 34 links dist., marked $\frac{1}{4}$ S S7 BT

A juniper, 5 ins. diam., bears S.6°E., 26 links dist., marked $\frac{1}{4}$ S18 BT

50.60 Rocky spur, 300 ft. above the $\frac{1}{4}$ section corner, projects N.15°W.; descend steep rocky NE. slope.

62.30 Draw, 250 ft. below spur, drains N.15°W.; ascend steep W. slope.

77.00 Spur, 370 ft. above draw, slopes NW.; continue along NW. slope, near top of spur.

79.76 The corner of sections 7, 8, 17 and 18.

Land, broken and mountainous, with a general northwesterly exposure and drainage; volcanic formation.
 Soil, shallow light colored clay and sand, with a rocky surface; 4th rate.

SUBDIVISION OF T. 29 S., R. 14 W.

Chains

Undergrowth, sage, black and bitter brush, mountain rush, yellowtop and weeds.
 Timber, juniper and pinon.
 Fair grazing land.

N.0°03'W., between sections 7 and 8.

Descend gradual NW. slope of broken mountainous land, through dense timber and scattered short undergrowth.

19.20 Descent becomes abrupt, bears NE. and SW.

39.00 Slope changes from an abrupt NW. slope to an abrupt N. slope.

40.00 On an abrupt N. slope, 640 ft. below section corner.

Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground, to solid rock, and in a large mound of stone to top, for $\frac{1}{4}$ section corner, with brass cap marked

| |
|---------------|
| $\frac{1}{4}$ |
| S7 S8 |
| 1937 |

from which.

A pinon, 6 ins. diam., bears N.59°30'E., 14 links dist., marked $\frac{1}{4}$ S8 BT

A pinon, 12 ins. diam., bears S.69°30'W., 23 links dist., marked $\frac{1}{4}$ S7 BT

65.60 Draw, 200 ft. below the $\frac{1}{4}$ section corner, drains N.60°E.; ascend steep SE. slope.

80.00 On steep SE. slope, 230 ft. above draw.

Set an iron post, 3 ft. long, 2 ins. diam., 16 ins. in the ground, to solid rock, and in a large mound of stone to top, for corner of sections 5, 6, 7 and 8, with brass cap marked

| |
|-----------|
| T29S R14W |
| S 6 S 5 |
| S 7 S 8 |
| 1937 |

from which

A juniper, 8 ins. diam., bears N.15°15'E., 104 links dist., marked T29S R14W S5 BT

A juniper, 10 ins. diam., bears S.52°15'E., 103 links dist., marked T29S R14W S8 BT

A juniper, 6 ins. diam., bears S.21°W., 154 links dist., marked T29S R14W S7 BT

A juniper, 4 ins. diam., bears N.40°30'W., 68 links dist., marked T29S R14W S6 BT

Land, broken and mountainous, with a general northwesterly and northeasterly exposure and drainage; volcanic formation.

Soil, shallow light colored clay and sand, with a rocky surface; 4th rate.

SUBDIVISION OF T. 29 S., R. 14 W.

Chains

Undergrowth, sage, black and bitter brush, mountain rush, yellowtop and weeds.
Timber, juniper and pinon.
Fair grazing land.

N. 89° 53' E., on a random line, between sections 5 and 8.

- 40.00 Set temporary $\frac{1}{4}$ section corner.
- 79.90 Intersect the N. and S. line, 7 links N. of the corner of sections 4, 5, 8 and 9.

Thence

S. 89° 56' W., on a true line, between sections 5 and 8.

Ascend gradual NE. slope of broken mountainous land, through scattered timber and dense short undergrowth.

- 4.30 Top of ascent, 20 ft. above corner, slopes N.; descend gradual NW. slope.
 - 7.50 Descent becomes more abrupt and timber dense, bears NE. and SW.
 - 26.80 Descent becomes gradual, bears NE. and SW.
 - 39.95 On gradual NW. slope, 490 ft. below top of ascent.
- Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground to solid rock, and in a large mound of stone to top, for $\frac{1}{4}$ section corner, with brass cap marked

S 5
 $\frac{1}{4}$ —
S 8
1937

from which

A juniper, 10 ins. diam., bears S. 31° 15' W., 91 links dist., marked $\frac{1}{4}$ S 8 BT

A pinon, 14 ins. diam., bears N. 30° 30' W., 155 links dist., marked $\frac{1}{4}$ S 5 BT

- 63.20 Draw, 30 ft. below the $\frac{1}{4}$ section corner, drains NE.; ascend steep SE. slope.
 - 79.90 The corner of sections 5, 6, 7 and 8, 270 ft. above draw.
- Land, broken and mountainous, with a general northeasterly exposure and drainage; volcanic formation.
- Soil, shallow light colored clay and sand, with a rocky surface; 4th rate.
- Undergrowth, sage, black and bitter brush, mountain rush, yellowtop and weeds.
- Timber, juniper and pinon.
- Fair grazing land.

S. 89° 58' W., on a random line, between sections 6 and 7.

SUBDIVISION OF T. 29 S., R. 14 W.

Chains

- 40.00 Set temporary $\frac{1}{4}$ section corner.
- 79.78 Intersect the W. boundary of the township, 5 links N. of the corner of sections 1, 6, 7 and 12, heretofore described.
Thence
N.89°56'E., on a true line, between sections 6 and 7.
Ascend abrupt rocky W. slope of broken mountainous land, through scattered timber and dense short undergrowth.
- 2.50 Rocky spur, 40 ft. above corner, projects N.15°E., about 10.00 chains distant, thence N.25°W.; descend gradual E. slope.
- 39.78 On gradual E. slope, 110 ft. below spur.
Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked

S 6
—
 $\frac{1}{4}$ S 7
1937

from which

A juniper, 9 ins. diam., bears N.31°E., 99 links dist., marked $\frac{1}{4}$ S6 BT

A juniper, 5 ins. diam., bears S.26°E., 32 links dist., marked $\frac{1}{4}$ S7 BT
- 44.70 Draw, 10 ft. below the $\frac{1}{4}$ section corner, drains SE.; ascend steep rocky SW. slope.
- 71.00 Rocky spur, 230 ft. above draw, projects S.30°E.; descend gradual SE. slope.
- 79.78 The corner of sections 5, 6, 7 and 8, 85 ft. below spur.
Land, broken and mountainous, with a general southerly exposure and drainage; volcanic formation.
Soil, shallow light colored clay and sand with a rocky surface; 4th rate.
Undergrowth, sage, black and bitter brush, yellowtop, mountain rush and weeds.
Timber, juniper and pinon.
Fair grazing land.

- N.0°03'W., on a true line, between sections 5 and 6.
Ascend gradual SE. slope of broken mountainous land, through medium dense timber and short undergrowth.
- 10.00 Ascent becomes gradual, bears NE. and SW.
- 15.00 Spur, 120 ft. above section corner, projects SW.; ascend gradually along general SW. slope.
- 35.00 Top of ascent, 20 ft. above spur, bears E. and W.; descend gradual N. slope.
- 40.00 On gradual N. slope, 10 ft. below top of ascent.
Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in

SUBDIVISION OF T. 29 S., R. 14 W.

Chains

the ground, to solid rock, and in a large mound of stone to top, for 1/4 section corner, with brass cap marked

S 6 | S 5
1937.

from which

A pinon, 4 ins. diam., bears N.81°E., 89 links dist., marked 1/4 S5 BT

A pinon, 4 ins. diam., bears N.63°W., 150 links dist., marked 1/4 S6 BT

44.30 Descent becomes abrupt, bears E. and N.75°W.

51.40 Draw, 170 ft. below the 1/4 section corner, drains NW.; ascend steep SW. slope.

59.80 Spur, 100 ft. above draw, projects N.75°W.; descend steep N. slope.

65.90 Draw, 150 ft. below spur, drains N.70°W.; ascend steep SW. slope.

77.40 Ascent becomes gradual, bears E. and W.

80.00 On gradual SW. slope, 190 ft. above draw.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for corner of lots 4 and 5, section 5, and lots 1 and 8, section 6, with brass cap marked

1 | 4
S6 | S5
8 | 5
1937

from which

A juniper, 12 ins. diam., bears S.20°45'E., 270 links dist., marked L5 S5 BT

A pinon, 4 ins. diam., bears S.11°W., 180 links dist., marked L8 S6 BT

A pinon, 10 ins. diam., bears N.54°45'W., 368 links dist., marked L1 S6 BT

No suitable bearing tree available to the NE.

82.50 Spur, 200 ft. above draw, projects N.60°W.; descend steep NE. slope.

91.14 On steep NE. slope, 130 ft. below spur.

Intersect the N. boundary of the township.

Set an iron post, 3 ft. long, 2 ins. diam., 28 ins. in the ground, for closing corner of sections 5 and 6, T.29 S., R.14 W., with brass cap marked

T28S R14W
S32
S 6 | S 5
T29S R14W
C C

1937 from which

SUBDIVISION OF T. 29 S., R. 14 W.

Chains

A juniper, 12 ins. diam., bears S.77°15'E., 158 links dist., marked T29S R14W S5 CC BT

A pinon, 8 ins. diam., bears S.16°W., 64 links dist., marked T29S R14W S6 CC BT

From this corner the corner of sections 31 and 32, T. 28 S., R. 14 W., bears West, 8.06 chains distant, an iron post, 2 ins. diam., set, marked and witnessed as described in the official record of the survey of T. 28 S., R. 14 W., of this group.

Land, broken and mountainous, with a general westerly exposure and drainage; volcanic formation.

Soil, shallow light colored clay and sand, with a rocky surface, lying on bedrock; 4th rate.

Undergrowth, sage and black brush, mountain rush, yellow-top and weeds.

Timber, juniper and pinon.

Fair grazing land.

ESTABLISHMENT OF ONE-QUARTER SECTION CORNERS BETWEEN CLOSING CORNERS ON NORTH BOUNDARY OF T. 29 S., R. 14 W.

From the closing corner of Ts. 28 and 29 S., R. 14 W., an iron post, 3 ins. diam., set, marked and witnessed, as described in the official record of the survey of T. 28 S., R. 14 W., of this group.

West, along the S. boundary of section 36, T. 28 S., R. 14 W.

32.16 Point which is a westing of 40.14 chains, from the corner of T. 29 S., Rs. 13 and 14 W., an iron post, 3 ins. diam., set, marked and witnessed, as described in the official record of the survey of T. 29 S., R. 13 W., of this group.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ section corner of section 1, T. 29 S., R. 14 W., with brass cap marked

$\frac{1}{4}$ S 1

1937

raise a mound

of stone, 3 ft. base, 2 ft. high, S. of corner.

40.00 The $\frac{1}{4}$ section corner of section 36, T. 28 S., R. 14 W., an iron post, 1 in. diam., set, marked and witnessed, as described in the official record of the survey of T. 28 S., R. 14 W., of this group.

72.30 The closing corner of sections 1 and 2, T. 29 S., R. 14 W., heretofore described.

80.00 The corner of sections 35 and 36, T. 28 S., R. 14 W., an iron post, 2 ins. diam., set, marked and witnessed, as described in the official record of the survey of T. 28 S., R. 14 W. of this group.

West, along the S. boundary of section 35.

32.25 Point midway between the closing corners of sections 1 and 2, and sections 2 and 3, T. 29 S., R. 14 W.

SUBDIVISION OF T. 29 S., R. 14 W.

Chains

enishd0

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ section corner of section 2, T. 29 S., R. 14 W., with brass cap marked

$\frac{1}{4}$ S 2
1937

raise a mound

of stone, 3 ft. base, 2 ft. high, S. of corner.

40.00 The $\frac{1}{4}$ section corner of section 35, T. 28 S., R. 14 W., an iron post, 1 in. diam., set, marked and witnessed, as described in the official record of the survey of T. 28 S., R. 14 W., of this group.

72.20 The closing corner of sections 2 and 3, T. 29 S., R. 14 W., heretofore described.

80.00 The corner of sections 34 and 35, T. 28 S., R. 14 W., an iron post, 2 ins. diam., set, marked and witnessed, as described in the official record of the survey of T. 28 S., R. 14 W. of this group.

West, along the S. boundary of section 34.

32.17 Point midway between the closing corners of sections 2 and 3, and sections 3 and 4, T. 29 S., R. 14 W.

Set an iron post, 3 ft. long, 1 in. diam., 25 ins. in the ground to solid rock, and in a large mound of stone to top, for $\frac{1}{4}$ section corner of section 3, T. 29 S., R. 14 W., with brass cap marked

$\frac{1}{4}$ S 3
1937

Alongside of post, deposit a volcanic stone, 8x6x3 ins., marked X.

40.00 The $\frac{1}{4}$ section corner of section 34, T. 28 S., R. 14 W., an iron post, 1 in. diam., set, marked and witnessed, as described in the official record of the survey of T. 28 S., R. 14 W. of this group.

72.14 The closing corner of sections 3 and 4, T. 29 S., R. 14 W., heretofore described.

80.00 The corner of sections 33 and 34, T. 28 S., R. 14 W., an iron post, 2 ins. diam., set, marked and witnessed, as described in the official record of the survey of T. 28 S., R. 14 W., of this group.

West, along the S. boundary of section 33.

32.09 Point which is midway between the closing corners of sections 3 and 4, and sections 4 and 5, T. 29 S., R. 14 W.

Set an iron post, 3 ft. long, 1 in. diam., 15 ins. in the ground to solid rock, and in a large mound of stone to top, for $\frac{1}{4}$ section corner of section 4, T. 29 S., R. 14 W., with brass cap marked

SUBDIVISION OF T. 29 S., R. 14 W.

Chains

 $\frac{1}{4}$ S4

1937

along the S. boundary of section 32.

Alongside of post deposited a volcanic stone, 10x10x5 ins. marked X.

- 40.00 The $\frac{1}{4}$ section corner of section 33, T. 28 S., R. 14 W., an iron post, 1 in. diam., set, marked and witnessed as described in the official record of the survey of T. 28 S., R. 14 W., of this group.
- 72.04 The closing corner of sections 4 and 5, T. 29 S., R. 14 W., heretofore described.
- 80.00 The corner of sections 32 and 33, T. 28 S., R. 14 W., an iron post, 2 ins. diam., set, marked and witnessed, as described in the official record of the survey of T. 28 S., R. 14 W. of this group.

West, along the S. boundary of section 32.

- 31.99 Point midway between the closing corners of sections 4 and 5, and sections 5 and 6, T. 29 S., R. 14 W.
- Set an iron post, 3 ft. long, 1 in. diam., 25 ins. in the ground to solid rock, and in a large mound of stone to top, for $\frac{1}{4}$ section corner of section 5, T. 29 S., R. 14 W., with brass cap marked

 $\frac{1}{4}$ S5

1937

from which

A pinon, 3 ins. diam., bears S.48°15'E., 7 links dist., marked BT

A pinon, 5 ins. diam., bears S.65°W., 42 links dist., marked $\frac{1}{4}$ S5 BT

- 40.00 The $\frac{1}{4}$ section corner of section 32, T. 28 S., R. 14 W., an iron post, 1 in. diam., set, marked and witnessed, as described in the official record of the survey of T. 28 S., R. 14 W., of this group.
- 71.94 The closing corner of sections 5 and 6, T. 29 S., R. 14 W., heretofore described.
- 80.00 The corner of sections 31 and 32, T. 28 S., R. 14 W., an iron post, 2 ins. diam., set, marked and witnessed, as described in the official record of the survey of T. 28 S., R. 14 W., of this group.

West, along the S. boundary of section 31.

- 31.94 Point which is West, 40.00 chains distant, from the closing corner of sections 5 and 6, T. 29 S., R. 14 W.
- Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for $\frac{1}{4}$ section corner, of section 6, T. 29 S., R. 14 W., with brass cap marked

ESTABLISHMENT OF ONE-QUARTER SECTION CORNERS BETWEEN
CLOSING CORNERS ON NORTH BOUNDARY OF T. 29 S., R. 14 W.

Chains

 $\frac{1}{4}$ S 6

1937

from which

A juniper, 5 ins. diam., bears S.12°15'E., 60 links
dist., marked $\frac{1}{4}$ S BT

A juniper, 10 ins. diam., bears S.38°15'W., 59 links
dist., marked $\frac{1}{4}$ S6 BT

- 40.00 The $\frac{1}{4}$ section corner of section 31, T. 28 S., R. 14 W.,
an iron post, 1 in. diam., set, marked and witnessed,
as described in the official record of the survey of
T. 28 S., R. 14 W., of this group.
- 71.59 The closing corner of Tps. 29 S., Rs. 14 and 15 W.,
heretofore described.
- 78.86 The corner of Tps. 28 S., Rs. 14 and 15 W., an iron post,
3 ins. diam., set, marked and witnessed, as described in
the official record of the survey of T. 28 S., R. 14 W.,
of this group.

GENERAL DESCRIPTION

The eastern portion of T. 29 S., R. 14 W. consists of a low pass in the divide between the drainage into the Wah Wah Valley to the north, and the Escalante Desert to the south. This portion of the township consists of low rolling hills and benches and separates the main range of the south end of the San Francisco Mountains to the northeast and the main range of the Wah Wah Mountains to the west. This portion of the township is at an elevation of about 5500 feet above sea level, and is of a limestone and volcanic formation. The west portion of the township is rough and mountainous, and is at an elevation of about 6500 feet above sea level and is a volcanic formation.

A low divide ridge bears in an easterly and westerly direction through the south portion of the township, which forms the divide between the drainage to the north into Wah Wah Valley, and the drainage to the south into the Escalante Desert.

The soil throughout the eastern portion of the township consists of a light colored clay and sand from 1 to 10 feet deep, lying on a heavy light colored clay subsoil, while that in the western portion consists of a shallow light colored clay and sand, with a rocky surface, lying on volcanic bedrock. None of the soil is suitable for farming purposes and may be classified as 4th rate.

The western portion of the township is covered with a dense growth of juniper and pinon timber, which has no commercial value except for firewood and fencing.

Through most portions of the township a dense short undergrowth of sage, black and bitter brush, mountain rush, yellowtop and weeds is found.

The only water in the township is Bumble Bee Spring, located in the NW $\frac{1}{4}$ NE $\frac{1}{4}$ of section 32. This is a small spring of good clear water, which flows about 40 gallons per hour. Near the spring are two large concrete water tanks used to store the water for the watering of stock.

An unimproved road bears in a northerly and southerly direction through sections 2, 11, 14, 23, 26, and 35. From this road other unimproved wood roads bear to the east and west.

GENERAL DESCRIPTION

Chains

Patented mineral survey No. 5446 is located in the SW $\frac{1}{4}$ of section 12, and the SE $\frac{1}{4}$ of section 11. This claim is known as the Brim Stone Mine lode, and appears to contain sulphur. Within the boundaries of this claim are two cabins, four incline shafts and a tunnel. In the SW $\frac{1}{4}$ NW $\frac{1}{4}$, section 12 is a mound of stone, which I take to be the true position for U. S. Mineral Monument No. 1, of the Sulphur Mining District.

The workings at this mineral claim and the water storage tanks at Bumble Bee Spring are the only improvements found in the township.

No settlers were living on the township at the time of the survey, and no portion of it is suitable for farming. The township is suitable for a-year-around grazing range for stock, and is being used for this purpose.

Milford, Utah, is located about 30 miles to the northeast of the township, and Lund, Utah, is located about 20 miles to the south. Nearly all portions of the eastern part of the township can be reached by automobile from these towns.

The only indications of mineral, oil, oil shale, or coal, that were found, were small quantities of sulphur in the workings located within the boundaries of the patented mineral claim. This claim was not being worked at the time of the survey.

The mean magnetic declination was found to be 16°45'E.

BOOK A-522

4-680
(Revised May 1964)

FIELD ASSISTANTS

| NAMES | CAPACITY |
|------------------------|-----------|
| Ulysses S. Gardner | Chairman |
| William C. White | Chairman |
| Donald B. Stringfellow | Chairman |
| John B. Van Den Akker | Chairman |
| Joe Atkin | Chairman |
| Loren E. Bell | Chairman |
| Robert Burgess | Flagman |
| Fred Stevens | Flagman |
| Jack Buttrey | Flagman |
| George Snook | Flagman |
| LeRoy Pullman | Cornerman |
| Vernon Raymond Maberry | Cornerman |
| Vernon Morgan | Cornerman |
| Richard M. Hales | Cornerman |
| Robert Anderson | Axman |
| Bernarr Langston | Axman |
| Richard G. Callaway | Axman |
| Max Ford | Axman |
| Reed Smith | Axman |

CERTIFICATE OF UNITED STATES SURVEYOR

Elliot Bird, Surveyor
Edward Eliason, Transitman
Molen Roper, Transitman
Kelvin Winwood, Transitman

We, Kelvin Winwood, Transitman, HEREBY CERTIFY upon honor the

pursuance of special instructions bearing date of the 29th day of July, 1936

received from the district cadastral engineer for Utah supplemental with assignm

instructions dated April 1, 1937 We have surveyed Independent resurvey of th

west boundary; survey of the subdivision, and establishment of one-

quarter section corners between closing corners on north boundary of

T. 29 S., R. 14 W.

of the Salt Lake Meridian, in the State of Utah, which

represented in the foregoing field notes as having been executed by US and under OUR direction; and that a

survey has been made in strict conformity with said instructions, the Manual of Instructions for the Sur

of the Public Lands of the United States, and in the specific manner described in the foregoing field notes

Lund, Utah.

May 19, 1937

Handwritten signatures of Elliot Bird, Edward Eliason, Molen Roper, and Kelvin Winwood with their titles: U.S. Surveyor, Transitman, Transitman, Transitman

CERTIFICATE OF APPROVAL

OFFICE OF U.S. SUPERVISOR OF SURVEYS,

Denver, Colorado JUN 19, 1941

The foregoing field notes of the survey of Independent resurvey of the west bounda

survey of the subdivision, and establishment of one-quarter section

corners between closing corners on north boundary, of T. 29 S.,

R. 14 W., Salt Lake Meridian, Utah

executed by Elliot Bird, Edward Eliason, Molen Roper, and Kelvin Winwood.

under special instructions dated July 29, 1936 supplemental and assignmen

instructions dated April 1, 1937, having been critically examined, and

the necessary corrections made prior to their certification by the engineer, the said field notes, and the survey

therein described, are hereby approved.

Handwritten signature of U.S. Supervisor of Surveys

CERTIFICATE OF TRANSCRIPT

I certify that the foregoing transcript of the field notes of the above described surveys in

is a true copy of the original field notes on file in the public survey office.

U.S. Supervisor of Surveys

Blank

Page

Blank

Page

279
279

BOOK A-522

4-979
(April 1933)

Book " A "

FIELD NOTES

OF THE

SURVEY OF THE SOUTH BOUNDARY AND A PORTION OF THE WEST BOUNDARY
AND A DEPENDENT RESURVEY AND SURVEY OF PORTIONS OF THE SUBDIVISION,
COMPLETING THE SURVEY OF
TOWNSHIP 6 SOUTH, RANGE 24 EAST

Of the Salt Lake Meridian,

In the State of Utah

EXECUTED BY

J. C. CLARK, U. S. SURVEYOR

AND

ERVINE F. SMITH, TRANSITMAN

Under special instructions dated August 1, 1936, which provided
for the surveys included under Group No. 274, bearing the approval of the
Commissioner of the General Land Office under date of September 16, 1936
and assignment instructions dated September 26, 1936.
supplemental " " " November 18, 1936.

Survey commenced October 10, 1936.

Survey completed December 12, 1936.

TOWNSHIP 6 SOUTH, RANGE 24 EAST

| | | | | | |
|----|----|----|----|----|----|
| 30 | 29 | 28 | 27 | 26 | 25 |
| 31 | 32 | 33 | 34 | 35 | 36 |

Lines ruled in black were surveyed by J. C. Clark, U. S. Surveyor.

Lines ruled in red were surveyed by Ervine F. Smith, Transitman.

Survey commenced October 10, 1936, and executed by J. C. Clark, U. S. Surveyor and Ervine F. Smith, Transitman with Young and Sons transits Nos. 8520 and 8395, respectively. The instruments are equipped with Smith solar attachments and full vertical circles, the horizontal limbs being provided with two double verniers placed opposite to each other and reading to single minutes of arc, which is also the least count of the verniers of the latitude and declination arcs, and vertical circles.

The instruments were in good condition, and having been placed in satisfactory adjustment prior to beginning the survey, and tested and found free from appreciable error, were approved by the district cadastral engineer for district No. 6, in assignment instructions dated September 26, 1936 and November 18, 1936, conditional upon satisfactory field tests. I also examined all the instrumental adjustments and corrected all errors before making the field tests hereinafter described.

The directions of the lines were determined by the solar transit method, except the line obtained by observations upon Polaris at elongation upon which to test the solar apparatuses as stated in the field notes. This special meridian established to test the solar attachments, was checked by Polaris observations at elongation, and when the weather permitted, a. m. and p. m. solar observations were taken every week upon this Polaris meridian. Determinations for latitude and declination were taken on line whenever practicable, and in computing the declinations of the sun, the refractions were corrected for altitudes, varying from 5000 to 5500 feet above sea level. During the progress of the survey of this township, the bearings of the boundaries and subdivisional lines were frequently checked by day light observations upon Polaris at elongation.

The measurements were made with Lallie steel tapes, 5 chains in length, graduated every link for the first 100 links, and the balance at intervals of 10 links. The tapes were tested by comparison with a Lufkin standard and found correct. All measurements were made on the slope, and the vertical angle of each interval was ascertained by clinometers in good adjustment; and the horizontal equivalents are entered in the field note record.

The data furnished with the special instructions gives the geographic position for the SE. cor. of the Tp., as follows: latitude $40^{\circ}15'N.$, and longitude $109^{\circ}09'W.$

The observed general average magnetic declination is $15^{\circ}44'$ east, which gives the magnetic bearing of the true meridian, $N.15^{\circ}44'W.$

INITIAL TEST OF INSTRUMENTS

October 10, 1936, at the cor. of Tps. 6 S., Rs. 24 and 25 E., at 6h 27.5m p. m., l. m. t., or 6h 44:1m p. m. by my watch which reads correct 105th. meridian time as determined by the Western Union telegraph office at Vern Utah, I observe Polaris at eastern elongation, making two sights each with the telescope in direct and reversed positions, and place a nail at the mean point, on a peg driven firmly in the ground 8 chains N.

October 11, after sunrise, I lay off the azimuth of Polaris $1^{\circ}21'30''$, and make a meridian mark on a second peg 18.96 lks. (12.51 ft.) to the west of the mean point in a line determined by the observation; I verify the angle by a vernier reading of the instrument.

During the tests on the meridian just described, transits No. 8520 on October 11, 1936 and instrument No. 8395 on November 29, 1936, by hourly a. m. and p. m. solar observations from 7:30 to 10:30 a. m. and from 1:30 to 4:30 p. m., define positions for meridians that differ no more than one and one half minutes from the meridian established by observations upon Polaris. At apparent noon, I make the proper settings on the declination arcs, and observe the sun on the meridian; the resulting readings of the latitude arcs agree within one half minute of the calculated latitude.

FINAL TEST OF INSTRUMENTS

December 13, 1936, on the same meridian which was established by observations upon Polaris, for the purpose of making the initial test of the instruments, I test the solar attachments every hour from 7:30 to 10:30 a. m. and from 1:30 to 4:30 p. m., making the proper settings on the arcs of the instruments; and ascertain that the lines determined with the solar attachments, when compared with the meridians established by Polaris observations, have a maximum error of less than one and one half minutes. At apparent noon, I set the calculated latitude on the latitude arcs, and observe the sun on the meridian; the resulting readings of the declination arcs agree within one half minute of the computed declination of the sun.

The latitudes obtained by the solar attachments on the Polaris meridian and the calculated latitude practically agree, and as the instruments using the solar apparatuses give positions for meridians that differ no more than one and one half minutes from the meridian established from Polaris observations, I conclude that the transits have been in adjustment during the progress of the survey of this township.

METHOD AND ORDER OF PROCEDURE

The north and east boundaries, the northern four miles of the west boundary, and the northern four tiers of sections in T. 6 S., R. 24 E. have been previously surveyed and established.

From the corner of Tps. 6 S., Rs. 24 and 25 E., the south boundary is run west with quarter section and section corners established for T. 6 S., alternately at regular intervals of 40.00 chains, counting from the east, and the fractional measurement placed in the west half mile; and the corner of Tps. 6 S., Rs. 23 and 24 E. is established at the point of intersection of the south boundary of the township with a line projected south from the reestablished corner of sections 19, 24, 25, and 30, on the west boundary of the township.

From the corner of Tps. 6 S., Rs. 23 and 24 E., the west boundary of the township is run north to the corner of

TOWNSHIP 6 SOUTH, RANGE 24 EAST

Chains

sections 19, 24, 25, and 30 with quarter section and section corners established alternately at regular intervals of 40.00 chains, counting from the south, and the fractional distance placed in the northern half mile.

A dependent resurvey was made of the subdivisional lines adjacent to the new work, along the south boundaries of sections 19, 20, 21, 22, 23, and 24. All dilapidated corner monuments were reconstructed and missing corners were restored by proportionate measurement.

The survey of the subdivisional lines were completed in the regular manner, from south to north and from east to west, and the fractional measurements were placed against the old subdivisional work to the north and against the west boundary of the township. With the exception of the line between sections 26 and 27, closing corners were necessary against the old work in the subdivision to the north; and quarter section corners were established at the proper positions between the closing corners or between a closing corner and a section corner on the opposite side of a section, along the north boundaries of sections 25, 26, 27, 28, 29, and 30.

SOUTH BOUNDARY OF T. 6 S., R. 24 E.

Commence at the cor. of Tps. 6 S., Rs. 24 and 25 E., which is an iron post, 3 ins. diam., extending 10 ins. above ground, firmly set and surrounded by a small mound of stone, and marked as follows:

T6S.
R24E R25E
S36|S31

1922

and witnessed by two bearing trees as described in the official record of the survey of T. 6 S., R. 25 E.

West, on a true line along the S. bdy. of T. 6 S., R. 24 E., on S. bdy. of sec. 36.

Over rolling, rough, and broken land, through a medium heavy growth of timber and scattering undergrowth; asc. general NE. slope 15 ft.

- 13.10 Spur, slopes N.15°W. about 10 chs. dist.; desc. 20 ft.
- 15.20 Draw, heads southeasterly approximately 3 chs. dist., drains northeasterly; asc. general NE. slope 30 ft.
- 19.60 Spur from SE., projects N.10°W. about 30 chs. dist.; gradual descent of 5 ft.
- 24.40 Draw, heads SE. 6 chs. dist., drains N.30°W.; asc. 15 ft.
- 27.80 Spur from SE., projects N.20°W. approximately 40 chs. dist.; desc. general SW. slope 40 ft. to $\frac{1}{4}$ sec. cor.
- 34.20 Leave timber, bears N. and S.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor. of sec. 36, with brass cap mkd.

$\frac{1}{4}$ S 36

1936

SOUTH BOUNDARY OF T. 6 S., R. 24 E.

- Chains
- of stone, 2 ft. base, 1 1/2 ft. high, N. of cor. raise a mound
- 42.90 A well traveled automobile and wagon road, bears N.14°15' to U. S. Highway No. 40 and S.14°15'E. about 5 chs. dist. thence southwesterly to Watson, Utah.
- 44.00 Leave rolling, rough, and broken land, bears N. and S.; enter nearly level and gently rolling land.
- 44.20 Wash, 40 lks. wide, 12 ft. deep, drains N.15°W. about 4 chs. dist. into a main wash.
- 47.80 A main wash, 100. lks. wide, 20 ft. deep, drains N.10°W.
- 54.40 An old wagon road, bears N.13°15'W. to U. S. Highway No. 40 and S.9°30'E. to Watson, Utah.
- 70.60 Wash, 25 lks. wide, 10 ft. deep, drains N.15°W.
- 80.00 On nearly level land, 10 ft. below 1/4 sec. cor. or 5 ft. below rolling, rough, and broken land, set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, with a sandstone, 5x4x3 ins., mkd. X, deposited at the base, for cor. of secs. 35 and 36, T. 6 S., with brass cap mkd.

T6S R24E
 S35|S36
 S 2
 T7SR24E
 1936

Land, rolling, broken, and rough with outcroppings of gray and light colored sandstone, E. 44.00 chs.; nearly level and gently rolling, W. 36.00 chs.; general drainage to the NE.

Soil, red sand and red sandy loam, varying in depth from surface rock to about 3 ft. on tops and slopes and to about 25 ft. in bottoms and on nearly level and gently rolling land, lying on a white chalky clay or gilsonite subsoil or on bedrock, 1st. to 4th. rate.

Timber, scattering to a medium growth of cedar.

Undergrowth, scattering to a medium dense growth of black sagebrush, shadscale, cotton brush, and greasewood; sparse growth of gramma grass.

Grazing, poor to fair of mostly brush.

West, along S. bdy. of sec. 35.

Over nearly level land, through scattering undergrowth; asc. gentle SE. slope 20 ft.

- 1.20 An old wagon road, bears N.15°E. and S.15°W.
- 8.30 Wash, 15 lks. wide, 6 ft. deep, drains NE.
- 13.10 Spur, projects NE. about 8 chs. dist.; gradual descent of 20 ft.
- 32.70 Wagon road, bears NE. to U. S. Highway No. 40 and SW. to Dead Man's Bench, thence southwesterly to Watson, Utah.
- 39.90 Wash, 10 lks. wide, 2 ft. deep, in the bottom of swale,

SOUTH BOUNDARY OF T. 6 S., R. 24 E.

Chains

- drains NE.; gradual ascent of 5 ft. over general SE. slope to
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with a sandstone, 8x6x1 ins., mkd. X, deposited at the base, for $\frac{1}{4}$ sec. cor. of sec. 35, with brass cap mkd.
- $\frac{1}{4}$ S 35
- 1936
- 55.90 Spur, 35 ft. above $\frac{1}{4}$ sec. cor., slopes S.15°E. about 2 chs. dist.; desc. SW. slope 10 ft.
- 60.70 Wash from N.15°W.; 10 lks. wide, 3 ft. deep, drains S.80°E.
- 68.10 Wash, 10 lks. wide, 7 ft. deep, in the bottom of draw, drains SE.; asc. general SE. slope 45 ft. to
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 34 and 35, T. 6 S., with brass cap mkd.
- T6S R24E
S34|S35
S 3
T7SR24E
1936
- from which
- A cedar, 5 ins. diam., bears N.4°45'E., 415 lks. dist., mkd. T 6 S R 24 E S 35 B T.
- A cedar, 6 ins. diam., bears N.69°09'W., 155 lks. dist., mkd. T 6 S R 24 E S 34 B T.
- Land, nearly level, rolling, and gently rolling, draining generally to the NE.; light colored and gray sandstone formation.
- Soil, red sand, sandy loam, and red sandy clay, about 6 ins. to 10 ft. deep, lying on a white chalky clay subsoil, or on varied colored clays or on sandstone bedrock, 1st. to 3rd. rate.
- Undergrowth, scattering to medium dense growth of shade-scale, cotton brush, black sagebrush, and greasewood; sparse to scattering growth of gramma grass.
- Fair fall and winter grazing of grass, weeds, and brush. No timber, except a few N. of cor. of secs. 34 and 35.
-
- West, along S. bdy. of sec. 34.
- Asc. rolling and broken general SE. slope 45 ft., through scattering timber and undergrowth.
- 3.50 Enter a medium heavy growth of timber, bears NE. and SW.
- 9.80 An old wagon road, bears N.15°E. and S.15°W.
- 9.90 Ridge, bears N.15°E. and S.15°W.; desc. NW. slope 50 ft.
- 20.70 Draw, drains NW.; asc. E. slope 20 ft.
- 24.40 Spur, slopes N. about 1 ch. dist.; desc. 25 ft.

SOUTH BOUNDARY OF T. 6 S., R. 24 E.

Chains

- 27.90 Wash, 30 lks. wide, 8 ft. deep, in the bottom of hollow, drains N.15°E.; asc. E. slope 50 ft.
- 38.30 Spur, projects N. approximately 8 chs. dist.; desc. W. slope 10 ft. to
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor. of sec. 34, with brass cap mkd.
- $\frac{1}{4}$ S 34
1936
- from which
- A cedar limb, 4 ins. diam., bears N.3°45'E., 61 lks. dist.; mkd. $\frac{1}{4}$ S 34 B T.
- A cedar, 4 ins. diam., bears N.70°45'W., 80 lks. dist.; mkd. $\frac{1}{4}$ S 34 B T.
- 46.90 Wash, 12 lks. wide, 8 ft. deep, in the head of draw, 10 ft. below $\frac{1}{4}$ sec. cor., drains N.10°E.; gradual ascent of 5 ft., over E. slope, through a sparse growth of timber.
- 50.60 Flat topped spur, projects N.; desc. general W. slope 45 ft., over small draws and spurs, putting to the SW.
- 74.20 A main wash, 100 lks. wide, 20 ft. deep, in the bottom of hollow, drains N.; asc. abrupt SE. slope 45 ft.
- 77.80 Rough spur, projects NE. about 5 chs. dist.; desc. NW. slope 15 ft. to
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 33 and 34, T. 6 S., with brass cap mkd.

T6S R24E

S33 S34

S 4

T7SR24E

1936

of stone, 4 ft. base, 2 $\frac{1}{2}$ ft. high, N. of cor. raise a mound

Land, rolling, rough, and broken; with narrow benches; light colored, yellow, and gray sandstone formation; surface rock exposed on portions of mile; general drainage NE., E. 9.90 chs.; W. 70.10 chs. drain generally N.

Soil, red sand and sandy loam, varying in depth from surface rock to about 3 ft. on tops and slopes and to several ft. in bottoms, lying on a yellow, brown, or white chalky clay subsoil or on sandstone bedrock, 1st. to 3rd. rate. Alternate layers of varied colored clays on some of the tops and slopes, 4th. rate.

Timber, cedar.

Undergrowth, scattering to a dense growth of black sagebrush, shadscale, cotton brush, and greasewood; sparse to a dense growth of gramma grass.

Poor to fair fall and winter grazing of gramma grass and brush.

SOUTH BOUNDARY OF T. 6 S., R. 24 E.

Chains

West, along S. bdy. of sec. 33,

Over rolling, rough, and broken land, through a medium heavy growth of timber and scattering undergrowth; desc. NW. slope 15 ft.

0.50 Draw, heads SW. about 6 chs. dist., drains NE.; asc. abruptly 60 ft.

4.30 Spur, projects N.15°E.; desc. 45 ft.

14.10 Wash, 50 lks. wide, 15 ft. deep, in the bottom of draw, from SW. about 40 chs. dist., drains N.10°E.; asc. NE. slope 50 ft.

19.40 Spur, projects NW. approximately 20 chs. dist., thence N.15°W.; desc. 30 ft.

26.30 Wash, 60 lks. wide, 10 ft. deep, in the bottom of draw, drains N.15°W.; asc. E. slope 25 ft.

28.80 Spur, slopes N. about 5 chs. dist.; desc. 45 ft.

31.60 Wash, 100 lks. wide, 15 ft. deep, in the bottom of draw, drains N.10°W.; asc. 50 ft. to $\frac{1}{4}$ sec. cor., on SE. slope.

34.10 Wash, 60 lks. wide, 15 ft. deep, drains N.10°E.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor. of sec. 33, with brass cap mkd.

$\frac{1}{4}$ S 33

1936

raise a mound of stone, 3 $\frac{1}{2}$ ft. base, 1 $\frac{1}{2}$ ft. high, N. of cor.

All trees within a reasonable distance are too scrubby for marking to witness cor.

46.10 Spur, 35 ft. above $\frac{1}{4}$ sec. cor., projects NE. approximately 15 chs. dist.; desc. 25 ft.

57.30 Draw, drains NE.; asc. general NE. slope 70 ft. to

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 32 and 33, T. 6 S., with brass cap mkd.

T6S R24E

S32 | S33

S 5

T7SR24E

1936

from which

A cedar, 11 ins. diam., bears N.56°15'E., 131 lks. dist., mkd. T 6 S R 24 E S 33 B T.

A cedar, 8 ins. diam., bears N.43°30'W., 156 lks. dist., mkd. T 6 S R 24 E S 32 B T.

Land, rolling, rough, and broken of mostly bad lands, draining generally to the NE.; light colored, yellow, and gray sandstone in the form of surface rock, outcroppings, and ledges.

Soil, red sand, sandy loam, and red sandy clay, varying in depth from surface rock to about 3 ft. on tops and

SOUTH BOUNDARY OF T. 6 S., R. 24 E.

Chains

slopes and to about 4 to 20 ft. in bottoms, lying on a yellow, brown, or white chalky clay subsoil or on sandstone bedrock, 1st. and 2nd. rate. Alternate layers of varied colored clays on the tops and slopes of some of the spurs, 4th. rate.

Timber, scattering to a medium heavy growth of cedar.

Undergrowth, scattering to a medium dense growth of shade, cotton brush, and black sagebrush; scattering to dense gramma grass.

Poor to fair fall and winter grazing of gramma grass and brush.

West, along S. bdy. of sec. 32.

Asc. gradual general NE. slope 25 ft., through a heavy growth of timber and scattering undergrowth.

3.80 Leave timber, bears NE. and S.

4.00 Leave rolling, rough, and broken land, bears NW. and SE.; asc. gradually 10 ft., over gently rolling top of bench.

6.60 Wagon road, bears N.15°30'W. to U. S. Highway No. 40 and S.22°30'E. about 4 chs. dist., thence southeasterly to Dead Man's Bench, and thence to Watson, Utah.

7.90 Top of ascent, bears N. and S.20°E.; gradual descent of 25 ft.

17.30 Wash, 10 lks. wide, 1 ft. deep, in the bottom of draw, drains NW.; gradual ascent of 5 ft.

18.50 Fork off road noted at 6.60 chs., bears NW. about 2 chs. dist., thence westerly, and SE.

20.70 Spur, slopes N. about 2 chs. dist.; gradual descent of 5 ft. to $\frac{1}{4}$ sec. cor.

23.20 Same road as noted at 18.50 chs., bears N.80°E. and NW.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with a sandstone, 7x5x2 ins., mkd. X, deposited at the base, for $\frac{1}{4}$ sec. cor. of sec. 32, with brass cap mkd.

$\frac{1}{4}$ S 32

1936

from which

A cedar, 7 ins. diam., bears N.46°15'E., 574 lks. dist., mkd. $\frac{1}{4}$ S 32 B T.

There are no other trees available for marking in sec. 32.

This cor. stands at the base of descent, bearing N. and S.

43.00 Spur, 5 ft. above $\frac{1}{4}$ sec. cor., slopes N. approximately 10 chs. dist.; desc. gradually 15 ft.

52.60 Draw, drains N.; gradual ascent of 5 ft.

57.40 Leave gently rolling top of bench, bears NW. and SE.;

SOUTH BOUNDARY OF T. 6 S., R. 24 E.

Chains

desc. abruptly 140 ft., over rolling, rough, and broken bad lands, on general SW. slope.

57.60 Enter a scattering growth of timber.

78.60 Draw, heads SE. about 4 chs. dist., drains NW. approximately 3 chs. dist., thence southwesterly; asc. NE. slope 15 ft. to

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 31 and 32, T. 6 S., with brass cap mkd.

T6S | R24E
 S31 | S32
 S6
 T7SR24E
 1936

raise a mound of stone, 4 ft. base, 2 ft. high; N. of cor.; no suitable bearing trees available.

Land, rolling and broken by washes and draws, on NE. slope, draining to the NE., E. 4.00 chs.; rolling, rough, and broken bad lands, draining SW., W. 22.60 chs.; gently rolling top of bench, draining NW., remainder of mile; light colored, yellow, and gray sandstone formation.

Soil, red sand, sandy loam, or red sandy clay, about 6 ins. to 3 ft. deep, lying on a brown, yellow, or white chalky clay subsoil or on bedrock of sandstone or shale, 1st. to 4th. rate. Mostly alternate layers of varied colored clays, sandstone, and shale on rolling, rough, and broken bad lands, 4th. rate.

Timber, cedar.

Undergrowth, shadscale, white sagebrush, cotton brush, black sagebrush, and greasewood, medium dense on top of bench, sparse to scattering on rolling, rough, and broken bad lands; good growth of gramma grass on top of bench, but scattering on other portions.

Good fall and winter grazing on top of bench, poor on other parts.

West, along S. bdy. of sec. 31.

Over rolling, rough, and broken bad lands, through scattering timber and undergrowth; asc. NE. slope 15 ft.

1.60 Spur, slopes N. about 2 chs. dist.; desc. 40 ft.

5.90 Draw, drains S.70°W.; asc. 60 ft.

13.80 Spur, slopes S.15°W. about 8 chs. dist.; desc. abruptly 35 ft.

16.90 Draw; heads N; approximately 6 chs. dist., drains S.15°W.; asc. 25 ft.

23.10 Spur, projects SW. about 15 chs. dist.; desc. abruptly 75 ft.

34.10 Draw, drains S.; asc. steep SE. slope 115 ft. to

SOUTH BOUNDARY OF T. 6 S., R. 24 E.

Chains

40.00 On top of spur, projecting SW. about 12 chs. dist., set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor. of sec. 31, with brass cap mkd.

$\frac{1}{4}$ S 31

1936

raise a mound of stone, 3 ft. base, 3 ft. high, N. of cor.

No suitable bearing trees are within a reasonable distance of this cor.

46.10 Wash, 15 lks. wide, 3 ft. deep, in the bottom of draw, 80 ft. below $\frac{1}{4}$ sec. cor., drains S.10°W.; asc. abruptly 105 ft.

50.40 Spur, projects S.10°W. about 12 chs. dist.; desc. 80 ft.

56.80 Draw, drains N.80°W.; asc. NE. slope 10 ft.

59.70 Spur, slopes N.60°W. about 2 chs. dist.; desc. 45 ft.

67.30 Wash, 150 lks. wide, 6 ft. deep, in the bottom of hollow, drains NW.; asc. E. slope 90 ft.

73.40 Wash, 40 lks. wide, 6 ft. deep, drains N.80°E.

82.60 Spur, projects N. about 8 chs. dist.; desc. W. slope 5 ft.

82.70 Set temp. cor. of Tps. 6 S., Rs. 23 and 24 E.

82.77 Cor. of Tps. 6 S., Rs. 23 and 24 E. subsequently established at this point; see notes of line bet. secs. 31 and 36, on W. bdy. of Tp.

Land, rolling, rough, and broken bad lands, draining SW. into a main hollow, thence northwesterly and westerly; outcroppings of gypsum, and yellow and light colored sandstone formation.

Soil, red sand, sandy loam, or red sandy clay, about 6 ins. to several ft. deep, lying on varied colored clays, gypsum, or on sandstone bedrock, 1st. to 4th. rate, in the bottoms of draws and hollows. Mostly alternate layers of varied colored clays, gypsum, and sandstone on tops and slopes, 4th. rate.

Timber, a few scattering cedar.

Undergrowth, scattering to medium dense shadscale, cotton brush, black sagebrush, salt brush, greasewood, white sagebrush, and mountain rush; sparse gramma grass.

Poor to fair winter grazing of gramma grass and brush.

PORTION OF THE WEST BOUNDARY OF T. 6 S., R. 24 E.

Commence at the reconstructed cor. of secs. 19, 24, 25, and 30, on the W. bdy. of the Tp.; hereinafter described.

South, on a random line for alignment only.

152.30 Intersect the S. bdy. of T. 6 S., R. 24 E.; west 7 lks. dist. from the temp. cor. of Tps. 6 S., Rs. 23 and 24 E., and at the point of intersection; set an iron post, 3 ft. long, 3 ins. diam., 27 ins. in the ground, for cor. of Tps. 6 S., Rs. 23 and 24 E., with brass cap mkd.

PORTION OF THE WEST BOUNDARY OF T. 6 S., R. 24 E.

Chains

T6S
R23E R24E
S36 | S31
S1
T7SR23E
1936

raise a mound of stone, 3½ ft. base, 2½ ft. high, N. of cor.

Thence,

North, on a true line along the W. bdy. of T. 6 S., R 24 E., bet. secs. 31 and 36.

Over rolling, rough, and broken bad lands, through a medium dense undergrowth; desc. NW. slope 70 ft.

- 5.60 Draw, drains N.80°E.; asc. abruptly 55 ft.
- 9.10 Spur, projects NE. about 6 chs. dist.; desc. 90 ft.
- 15.80 A main wash, 120 lks. wide, 10 ft. deep, in the bottom of hollow, drains N.70°W. approximately 2 chs. dist., thence northerly; over nearly level land.
- 20.60 Same wash as noted at 15.80 chs., drains N.15°E. about 2 chs. dist., thence northwesterly.
- 23.20 Same wash as noted at 15.80 chs., drains N.80°W.; begin ascent of 175 ft., over SE. slope.
- 26.20 Wash, 12 lks. wide, 6 ft. deep, drains SW.
- 35.00 Spur, projects S.25°W. approximately 10 chs. dist.; desc. 55 ft.
- 37.70 Draw, from NE. about 6 chs. dist., drains SW.; asc. SE. slope 50 ft. to
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for ¼ sec. cor., with brass cap mkd.

¼
S 36 | S 31
1936

raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor.

- 41.40 Spur, 10 ft. above ¼ sec. cor., slopes SW. about 3 chs. dist.; desc. 60 ft.
- 48.40 Wash, 160 lks. wide, 20 ft. deep, in the bottom of draw, drains S.70°W.; asc. 70 ft.
- 56.20 Spur, projects S.15°W. approximately 25 chs. dist.; desc. 15 ft.
- 59.90 Draw, heads N.80°E. about 10 chs. dist., drains S.25°W.; asc. 90 ft.
- 65.20 Top of ascent or S. edge of bench, bears NE. and SW.; desc. NW. slope 30 ft., over rolling top.
- 69.00 Draw, heads NE. about 6 chs. dist., drains SW.; asc. SW. slope 25 ft.
- 72.40 Top of ascent, bears N.60°W. and S.60°E.; desc. NE. slope 25 ft. to

PORTION OF THE WEST BOUNDARY OF T. 6 S., R. 24 E.

Chains

80.00

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 25, 30, 31, and 36, with brass cap mkd.

T6S
R23E R24E
S25|S30
S36|S31
1936

raise a mound of stone, 3 1/2 ft. base, 2 ft. high, W. of cor.

Land, rolling and gently rolling tops of benches and rolling, rough, and broken bad lands, draining generally to the W.; outcroppings of gypsum, and yellow and light colored sandstone formation.

Soil; red sand, sandy loam, and red sandy clay, about 6 ins. to 3 ft. deep on tops and slopes and several ft. deep in bottoms; lying on varied colored clay subsoils or on sandstone or gypsum bedrock, 1st. to 3rd. rate. Alternate layers of varied colored clays, sandstone, and gypsum on greater portion of bad lands, 4th. rate.

Undergrowth, scattering to medium dense growth of shadscale, cotton brush, salt brush, black sagebrush, greasewood, and mountain rush. Fair growth of gramma grass on benches, sparse on other portions.

Poor to fair winter grazing of gramma grass and brush.

No timber.

North, bet. secs. 25 and 30.

Over rolling top of bench, through medium dense undergrowth; desc. gradual NE. slope 5 ft.

0.20

Wash, 5 lks. wide, 2 ft. deep, in the bottom of draw, from SE. about 4 chs. dist.; drains NW.; asc. gradually 5 ft.

0.40

Spur, slopes N.70°W. about 3 chs. dist.; desc. 10 ft.

2.50

Draw, drains NW.; asc. gradually 15 ft.

11.00

Spur, projects N.80°W. approximately 20 chs. dist.; gradual descent of 35 ft.

11.10

Wagon road, bears NW. about 4 chs. dist., thence westerly and S.70°E.

19.60

Draw, drains NW.; gradual ascent of 5 ft.

24.80

Enter a medium heavy growth of timber, bears N.60°W. and S.60°E.

29.60

Spur, projects NW. approximately 20 chs. dist.; desc. gradual NE. slope 15 ft. to

40.00

On N. edge of bench, bearing NW. and SE., set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/4 sec. cor., with brass cap mkd.

1/4
S 25 | S 30

1936

PORTION OF THE WEST BOUNDARY OF T. 6 S., R. 24 E.

Chains

from which

A cedar limb, 5 ins. diam.; bears N.58°30'E., 16½ lks. dist., mka. B T.

A cedar, 9 ins. diam., bears S.58°15'W., 67 lks. dist., mka. ¼ S 25° B.T.

The bearing tree in sec. 30 is too scrubby for full marking.

From this ¼ sec. cor., desc. NE. slope 85 ft., over rolling and broken bad lands.

48.60 Leave timber, bears E. and W.

50.00 Wash, 15 lks. wide; 5 ft. deep, in the bottom of draw, drains W.; asc. SW. slope 65 ft.

70.90 Top of ascent or S. edge of bench, bears NW. about 2 chs. dist., thence N.15°W., and S.70°E.; desc. gradually 5 ft., over nearly level top to

72.30 Intersect the original cor. of secs. 19, 24, 25, and 30, which is a light colored sandstone, 14x7x4 ins., mka. with 4 notches on N. and 2 notches on S. edges, and lying on top of ground and surrounded by a few scattered stone, but no evidence of other accessories. I reset the stone at the same point, 10 ins. in the ground, and alongside of the rock cor., set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 19, 24, 25, and 30, with brass cap mka.

T6S
R23E R24E
S24|S19
S25|S30
1936

of stone, 2½ ft. base, 2 ft. high, W. of cor. raise a mound

Land, nearly level, gently rolling, and rolling tops of benches, and rolling and broken bad lands, draining generally to the SW.; outcroppings of gypsum, and yellow and light colored sandstone formation.

Soil, red sand, sandy loam, and red sandy clay, about 6 ins. to 3 ft. deep on tops and slopes and several ft. deep in bottoms, lying on varied colored clay subsoils or on sandstone or gypsum bedrock, 1st. to 3rd. rate. Alternate layers of varied colored clays, sandstone, and gypsum on greater portion of bad lands, 4th. rate.

Timber, cedar.

Undergrowth, scattering to medium dense shadscale, cotton brush, salt brush; black sagebrush, greasewood, and mountain rush; fair growth of gramma grass on benches, sparse on other portions.

Poor to fair winter grazing of gramma grass and brush.

DEPENDENT RESURVEY OF A PORTION OF THE
SUBDIVISION OF T. 6 S., R. 24 E.

Random Lines

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISION OF T. 6 S., R. 24

Chains

- Commence at the cor. of secs. 19, 24, 25, and 30, on the E. bay. of the Tp., hereinafter described.

West, on retracement line bet. secs. 24 and 25.

38.76 Fall 2.09 chs. N. of the $\frac{1}{4}$ sec. cor., hereinafter described.

Therefore, the bearing of this line is S.86°55'W., and the distance is 38.82 chs.

From the $\frac{1}{4}$ sec. cor.,

West, with continuous measurement.
- 79.17 Fall 10 $\frac{1}{2}$ lks. N. of the cor. of secs. 23, 24, 25, and 26, hereinafter described.

Therefore, the bearing of this line is S.89°51'W., and the distance 49.41 chs.

From the cor. of secs. 23, 24, 25, and 26,

West, on retracement line bet. secs. 23 and 26.
- 40.46 Fall 32 $\frac{1}{2}$ lks. N. of the $\frac{1}{4}$ sec. cor., hereinafter described.

Therefore, the bearing of this line is S.89°32'W., and the distance 40.46 chs.

From the $\frac{1}{4}$ sec. cor.,

West, with continuous measurement.
- 81.16 Fall 16 lks. N. of the cor. of secs. 22, 23, 26, and 27, hereinafter described.

Therefore, the bearing of this line is S.89°46'W., and the distance 40.70 chs.

From the cor. of secs. 22, 23, 26, and 27,

West, on retracement line bet. secs. 22 and 27.
- 42.29 Fall 1.25 chs. S. of the $\frac{1}{4}$ sec. cor., hereinafter described.

Therefore, the bearing of this line is N.88°18'W., and the distance 42.31 chs.

From the $\frac{1}{4}$ sec. cor.,

West, with continuous measurement.
- 82.18 Fall 26 $\frac{1}{2}$ lks. N. of the cor. of secs. 21, 22, 27, and 28, hereinafter described.

Therefore, the bearing of this line is S.89°37'W., and the distance 39.89 chs.

From the cor. of secs. 21, 22, 27, and 28,

West, on retracement line bet. secs. 21 and 28.
- 40.14 Fall 29 lks. N. of the $\frac{1}{4}$ sec. cor., hereinafter described.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISION OF T. 6 S., R. 24 E.

Chains

Therefore, the bearing of this line is S.89°35'W., and the distance 40.14 chs.

From the $\frac{1}{4}$ sec. cor.,

West, with continuous measurement.

79.93 Fall 42 lks. N. of the cor. of secs. 20, 21, 28, and 29, hereinafter described.

Therefore, the bearing of this line is S.89°24'W., and the distance 39.79 chs.

From the cor. of secs. 20, 21, 28, and 29,

West, on retracement line bet. secs. 20 and 29.

40.00 Unable to find any evidence of the $\frac{1}{4}$ sec. cor., after diligent search.

80.00 Unable to find any trace of the cor. of secs. 19, 20, 29, and 30, after diligent search.

West, on retracement on same line with continuous measurement, bet. secs. 19 and 30.

120.00 Unable to find any evidence of the $\frac{1}{4}$ sec. cor., after diligent search.

160.48 Fall 101 lks. N. of the cor. of secs. 19, 24, 25, and 30, on the W. bdy. of the Tp., hereinbefore described.

Therefore, the bearing of the line bet. the cor. of secs. 20, 21, 28, and 29, and the cor. of secs. 19, 24, 25, and 30, on the W. bdy. of the Tp., is S.89°38'W., and by proportionate measurement, the length of each of the three E. half miles is 40.78 chs., and the length of the W. half mile 38.14 chs.

REESTABLISHMENT OF THE SURVEYS EXECUTED BY A. D.
FERRON, U. S. DEPUTY SURVEYOR, IN 1879

True Lines

Commence at the cor. of secs. 19, 24, 25, and 30, on the E. bdy. of the Tp., which is an iron post, 2 ins. diam., extending 9 ins. above ground, firmly set, correctly marked, and witnessed on the W. by a mound of stone, $1\frac{1}{2}$ ft. base, 1 ft. high.

S.86°55'W., on a true line on a dependent resurvey bet. secs. 24 and 25.

Over nearly level land, through scattering undergrowth; desc. gentle W. slope 15 ft.

10.40 A well traveled automobile and wagon road, bears N.15°W. to U. S. Highway No. 40 and south about 40 chs. dist., thence southwesterly to Watson, Utah.

12.20 E. bank of wash, 30 ft. high, bears N. and S.; wash in bottom of swale, drains N.

14.50 W. bank of the wash, 30 ft. high, bears N. and S.; a four strand barbed wire fence, bears N. and S. along bank of the wash; asc. gradually 55 ft. to $\frac{1}{4}$ sec. cor. of sec. 24, over gentle E. slope, through medium dense undergrowth.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISION OF T. 6 S., R. 24 E.

- Chains
24.40 Wagon road, bears N.15°W. to U. S. Highway No. 40 and S.15°E. to Dead Man's Bench, thence southwesterly to Watson, Utah.
- 28.70 Wash, 20 lks. wide, 8 ft. deep, drains N.15°W.
- 38.82 The original $\frac{1}{4}$ sec. cor., which is a sandstone, 11x7x5 ins., loosely set 8 ins. in the ground, marked $\frac{1}{4}$ on N. face, and witnessed on the N. by a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high. I reset the stone at the same point, 8 ins. in the ground. This cor. now pertains to sec. 24, only.

Alongside of the original cor., set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor. of sec. 24, with brass cap mkd.

 $\frac{1}{4}$ S 24 /
1936

raise a mound of stone, 3 ft. base, 3 ft. high, N. of cor.

Thence,

S.89°51'W., with continuous measurement.
- 40.17 On E. slope, 10 ft. above $\frac{1}{4}$ sec. cor. of sec. 24, midway in departure bet. the cor. of secs. 19, 24, 25, and 30, on the E. bdy. of the Tp. and the closing cor. of secs. 25 and 26, hereinafter established and described, subsequently set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor. of sec. 25, with brass cap mkd.

 $\frac{1}{4}$ S 25 /
1936

raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, S. of cor.
- 40.50 Spur, 5 ft. above $\frac{1}{4}$ sec. cor. of sec. 25, projects N. approximately 10 chs. dist.; desc. 35 ft.
- 42.60 Draw, heads SW. about 5 chs. dist., drains N.15°E.; asc. E. slope 30 ft.
- 45.30 Spur, projects N. approximately 20 chs. dist.; desc. 25 ft.
- 52.20 Draw, heads S. about 3 chs. dist., drains N.; asc. 15 ft.
- 63.10 Spur, projects N. approximately 12 chs. dist.; desc. 25 ft.
- 74.00 Wash, 15 lks. wide, 3 ft. deep, in the bottom of draw, drains N.60°E.; asc. gentle SE. slope 5 ft. to
- 79.23 The original cor. of secs. 23, 24, 25, and 26, which is a gray sandstone, 6x6x4 ins. above ground, firmly set, and marked with 2 notches on S. and 1 notch on E. edges, but no evidence of accessories. This cor. now pertains to secs. 23 and 24, only.

Alongside of the original cor., set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 23 and 24, with brass cap mkd.

T6S R24E
S23 S24
S25
1936

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISION OF T. 6 S., R. 24 E.

Chains

raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.

Land, rolling and gently rolling, and nearly level across bottoms of hollows and swales; light colored, gray, and yellow sandstone formation; drainage N. and NE., thence generally to the N.

Soil; red sand and red sandy loam, varying in depth from about 1 to 3 ft. on tops and slopes to about 30 ft. in the bottoms, lying on a yellow or white chalky subsoil or on sandstone bedrock, 1st. to 4th. rate. Alternate layers of varied colored clays on portions of mile, 4th. rate.

Undergrowth, scattering to dense black sagebrush, shade-scale, cotton brush, greasewood, and salt brush; a sparse to a fair growth of gramma grass.

Fair fall and winter grazing of gramma grass and brush.

No timber.

S.89°32'W., on a true line along S. bdy. of sec. 23.

Over nearly level and gently rolling land, through medium dense undergrowth; asc. gradual SE. slope 75 ft.

1.05 Point, for closing cor. of secs. 25 and 26, hereinafter described.

3.20 Wash, 6 lks. wide, 2 ft. deep, drains NE.

28.80 Leave nearly level and gently rolling land, bears NW. and SE.; begin abrupt ascent of 105 ft. to ¼ sec. cor. of sec. 23, on NE. slope.

29.00 Enter scattering timber.

40.46 The original ¼ sec. cor., which is a sandstone, 20x11x2 ins., loosely set 10 ins. in the ground, marked ¼ on N. face, and witnessed on the N. by a small mound of stone. This cor. now pertains to sec. 23, only, and I reset the stone monument at the same point, 15 ins. in the ground.

Alongside of the original cor., set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for ¼ sec. cor. of sec. 23, with brass cap mkd.

¼ S 23

1936

raise a mound of stone, 3½ ft. base, 2 ft. high, N. of cor.

Thence,

S.89°46'W., with continuous measurement.

41.105 Point midway bet. the closing cor. of secs. 25 and 26, and the reestablished cor. of secs. 22, 23, 26, and 27, hereinafter described, subsequently set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground to solid rock, with a sandstone, 8x6x2 ins., mkd. X, deposited at the base, and in a mound of stone, 5½ ft. base, 2 ft. high, for ¼ sec. cor. of sec. 26, with brass cap mkd.

¼ S 26

1936

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISION OF T. 6 S., R. 2

Chains

This cor. stands on a NE. slope, 10 ft. above the $\frac{1}{2}$ sec. cor. of sec. 23.

41.20 Rocky ridge, 10 ft. above $\frac{1}{2}$ sec. cor. of sec. 26, bears NW. and SE.; desc. SW. slope 60 ft. to

51.20 Foot of ridge, bears NW. and SE.; desc. more gradually 6 ft., over rolling and gently rolling land.

51.40 Leave scattering timber.

67.90 Wash, 15 lks. wide, 3 ft. deep, drains SW. about 6 chs. dist. into a main wash, draining from SE. to the NW.

76.60 Wash, 12 lks. wide, 8 ft. deep, in the bottom of draw, drains NW.; gradual ascent of 5 ft.

80.00 Low spur, slopes NW. approximately 8 chs. dist.; desc. gentle SW. slope 5 ft. to

81.16 The original cor. of secs. 22, 23, 26, and 27, which is a sandstone, 10x6x4 ins., lying on top of ground, and marked with 2 grooves on one face and 2 notches on one edge, but no evidence of accessories. This cor. still pertains to secs. 22, 23, 26, and 27, and I reset the stone monument at the same point, 7 ins. in the ground.

Alongside of the original cor., set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, with a sandstone, 8x4x3 ins., mkd. X, deposited at the base, for cor. of secs. 22, 23, 26, and 27, with brass cap mkd.

T6S R24E

S22 S23

S27 S26

1936

Land, nearly level, rolling and gently rolling, and rolling mountainous, with outcroppings of yellow and light colored sandstone formation; drainage NE., E. 41.60 chs.; remainder of mile drains NW.

Soil, red sand, red sandy loam, or sandy clay, varying in depth from about 6 ins. to 3 ft. on tops and slopes to several ft. in bottoms, and lying on varied colored clay subsoils or on a white chalky formation or on sandstone bedrock, 1st. to 4th. rate.

Timber, cedar.

Undergrowth, medium dense to dense black sagebrush, shade-scale, cotton brush, greasewood, and salt brush; poor to fair growth of gramma grass.

Fair fall and winter grazing of gramma grass and brush.

N.88°18'W., on a true line bet. secs. 22 and 27.

Over gently rolling land, through medium dense undergrowth; desc. gradual SW. slope 5 ft.

1.30 Wash, 10 lks. wide, 3 ft. deep, in the bottom of draw, drains N.15°W.; gradual ascent of 15 ft.

17.00 Top of ascent, bears N. and S.; desc. gradually 10 ft.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISION OF T. 6 S., R. 24 E.

Chains

- 21.80 Draw, heads S. about 10 chs. dist., drains NW.; gradual ascent of 5 ft.
- 25.30 Spur, slopes NW. about 6 chs. dist.; desc. gradual SW. slope 30 ft. to
- 39.91 Point midway in departure of 79.78 chs., bet. the cor. of secs. 22, 23, 26, and 27 and the closing cor. of secs. 27 and 28, hereinafter established and described, subsequently set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with a sandstone, $4 \times 2 \frac{1}{2} \times 2$ ins., mkd. X, deposited at the base, for $\frac{1}{4}$ sec. cor. of sec. 27, with brass cap mkd.
- $\frac{1}{4}$ S 27
- 1936
- 40.20 Wash, 20 lks. wide, 7 ft. deep, in the bottom of draw, 10 ft. below $\frac{1}{4}$ sec. cor. of sec. 27, drains N.70°W.; asc. gradual general E. slope 10 ft. to
- 42.31 The original $\frac{1}{4}$ sec. cor., which is a yellow sandstone, $12 \times 11 \times 3$ ins. above ground, firmly set, and marked $\frac{1}{4}$ on N. face, but no evidence of accessories. This cor. now pertains to sec. 22, only.
- Alongside of the original cor., set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with a sandstone, $5 \times 4 \times 1 \frac{1}{2}$ ins., mkd. X, deposited at the base, for $\frac{1}{4}$ sec. cor. of sec. 22, with brass cap mkd.
- $\frac{1}{4}$ S 22
- 1936
- Thence,
- S.89°37'W., with continuous measurement.
- 47.10 Spur, 15 ft. above $\frac{1}{4}$ sec. cor. of sec. 22, projects N. approximately 6 chs. dist., thence northwesterly; desc. 85 ft., over general W. slope.
- 58.80 Wash, 20 lks. wide, 6 ft. deep, drains SW.
- 64.70 A main wash, 120 lks. wide, 15 ft. deep, in the bottom of swale, drains N.10°W.; over nearly level land to cor. of secs. 21 and 22:
- 70.70 E. edge of wash; 100 lks. wide, 20 ft. deep, drains N.10°W.
- 79.80 Point for closing cor. of secs. 27 and 28, hereinafter described.
- 82.20 The original cor. of secs. 21, 22, 27, and 28, which is a gray sandstone, $9 \times 6 \times 4 \frac{1}{2}$ ins., loosely set 4 ins. in the ground, marked 2 grooves on S. face and 3 grooves on E. face, but no evidence of accessories. This cor. now pertains to secs. 21 and 22, only, and I reset the stone monument at the same point, 6 ins. in the ground.
- Alongside of the original cor., set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, with a sandstone, $10 \times 2 \times 2 \frac{1}{2}$ ins., mkd. X, deposited at the base, for cor. of secs. 21 and 22, with brass cap mkd.

T6S R24E

S21 | S22

S 28

1936

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISION OF T. 6 S., R. 2

Chains

Land, nearly level, rolling, and gently rolling, draining generally to the NW.; outcroppings of gray, yellow, and light colored sandstone formation.

Soil, red sand, sandy loam, or red sandy clay, varying in depth from about 6 ins. to 3 ft. on tops and slopes to 30 ft. in bottoms, and lying on varied colored clay subsoils or on a white chalky formation or on sandstone bedrock, 1st. to 4th. rate.

Undergrowth, medium dense to dense black sagebrush, shade scale, cotton brush, greasewood, and salt brush; poor to fair growth of gramma grass.

Fair fall and winter grazing of gramma grass and brush.

No timber.

S.89°35'W., on a true line bet. secs. 21 and 28.

Over nearly level bottom of swale, through dense short undergrowth.

- 3.40 Wash, 60 lks. wide, 20 ft. deep, in the bottom of the swale, 25 ft. below cor. of secs. 21 and 22, drains N.; a dam of a small reservoir, extending across the wash, bears S. 2.50 chs. dist.; asc. gradually 25 ft.
- 11.50 Top of ascent on S. slope of knoll; gradual descent of 5 ft., over general W. slope.
- 18.90 Head of draw, drains N.; asc. 15 ft.
- 20.70 Low ridge, bears N. about 1.50 chs. dist., then slopes northeasterly, and S. approximately 8 chs. dist., thence easterly and southwesterly; desc. general NW. slope 30 ft.
- 27.50 Draw, heads SW. about 12 chs. dist., drains NE.; asc. 20 ft.
- 35.50 Spur, slopes N. about 3 chs. dist.; desc. gradual NW. slope 5 ft. to
- 37.67 Point midway bet. the closing cors. of secs. 27 and 28, and 28 and 29, hereinafter established and described, subsequently set an iron post; 3 ft. long, 1 in. diam., 27 ins. in the ground, with a basalt stone, 5x4x2½ ins., mkd. X, deposited at the base, for ¼ sec. cor. of sec. 28, with brass cap mkd.

¼ S 28

1936

- 39.80 Wash, 15 lks. wide, 6 ft. deep, in the bottom of draw, 5 ft. below ¼ sec. cor. of sec. 28, drains NE.; asc. gradual general NE. slope 10 ft. to

- 40.14 The original ¼ sec. cor., which is a light colored sandstone, 17x10x8 ins., loosely set 8 ins. in the ground, and marked ¼ on N. face, but no evidence of accessories. This cor. now pertains to sec. 21, only, and I reset the stone monument at the same point, 12 ins. in the ground.

Alongside of the original cor., set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with a sand-

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISION OF T. 6 S., R. 24 E.

Chains

stone, 8x5x3 ins., mkd. X, deposited at the base, for $\frac{1}{2}$ sec. cor. of sec. 21, with brass cap mkd.

$\frac{1}{2}$ S 21

1936

Thence,

S.89°24'W., with continuous measurement.

From the $\frac{1}{2}$ sec. cor. of sec. 21, continue gradual ascent of 130 ft., over numerous small washes, draws, and spurs, putting to the NE., on general NE. slope.

- 75.60 E. edge of bench, bears NW. and SE.; desc. gradual SW. slope 5 ft., over gently rolling top of bench to
 77.74 Point for clearing cor. of secs. 20 and 21, hereinafter described.
 79.93 The original cor. of secs. 20, 21, 28, and 29, which is a sandstone, 16x12x6 ins., lying on top of ground, and marked with 2 grooves on one face and 4 notches on one edge, but no evidence of accessories. This cor. now pertains to secs. 20 and 21, only, and I reset the stone monument at the same point, 12 ins. in the ground.

Alongside of the original cor., set an iron post, 3 ft. long, 2 in. diam., 27 in. in the ground, with a basalt stone, 5x4x1 ins., mkd. X, deposited at the base, for cor. of secs. 20 and 21, with brass cap mkd.

TGS R245

2201521

579

1936

Land, nearly level, rolling, and gently rolling, and broken by deep washes, draining generally to the N.; light colored and yellow sandstone and gypsum formation.

Soil, red sand, sandy loam, or red sandy clay, varying in depth from about 6 ins. to 3 ft. on tops and slopes to 30 ft. in bottoms, and lying on varied colored clay subsoils or on a yellow clay or white chalky formation or on sandstone or gypsum, lat. to 4th. rate.

Undergrowth, medium dense to dense salt brush, cotton brush, shadscale, black sagebrush, greasewood, and white sagebrush; sparse to a fair growth of gramma grass.

Fair fall and winter grazing of gramma grass and brush.

No timber.

S.89°38'W., on a true line bet. secs. 20 and 29.

Over nearly level and gently rolling top of bench, through medium dense undergrowth; desc. gradual SW. slope 20 ft.

- 6.30 Tagon road, bears N.4°45'E. about 1 ch. dist., thence northwesterly to U. S. Highway No. 40 and S.1°15'W. about 2 chs. dist., thence southwesterly to Dead Man's Bench, and thence to Watson, Utah.

- 11.80 Draw, heads SE. approximately 12 chs. dist., drains NW.; gradual ascent of 25 ft.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISION OF T. 6 S., R. 2

Chains

29.70 W. edge of bench, bears NW. and SE.; desc. SW. slope 35 ft., over rolling and broken land to 1/4 sec. cor. of sec. 29.

36.50 Wash, 15 lks. wide, 6 ft. deep, drains SW.

37.86 Point midway bet. the closing cors. of secs. 28 and 29, and 29 and 30, hereinafter established and described, subsequently set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with a gypsum stone, 5x4x2 ins., mkd. X, deposited at the base, for 1/4 sec. cor. of sec. with brass cap mkd.

1/4 S 29
1936

39.20 E. bank of wash, 150 lks. wide, 30 ft. deep, in the bottom of draw, 20 ft. below 1/4 sec. cor. of sec. 29, drains NW asc. 5 ft. to

40.78 Proportionate point for 1/4 sec. cor. of sec. 20, falls on W. bank of the wash noted at 39.20 chs., making it impracticable to establish a cor. monument.

43.78 On a general NE. slope, 15 ft. above proportionate point for 1/4 sec. cor. of sec. 20, set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with a sandstone, 5x4x3 ins., mkd. X, deposited at the base, for witness 1/4 sec. cor. of sec. 20, with brass cap mkd.

1/4 S 20
WC
1936

57.40 Top of ascent, 30 ft. above witness 1/4 sec. cor. of sec. 20, bears N. and S.; desc. gradual W. slope 10 ft.

62.20 Wash, 60 lks. wide, 20 ft. deep, in the bottom of draw, drains N.15°E.; asc. 30 ft.

65.40 Enter a medium heavy growth of timber, bears N.15°W. and S.15°E.

67.60 Spur, projects N.20°W. approximately 15 chs. dist.; desc. 15 ft.

71.30 Draw, heads SE. about 6 chs. dist., drains NW.; asc. E. slope 20 ft.

76.30 Top of ascent, bears N. and S.; desc. W. slope 25 ft. to

77.91 Point for closing cor. of secs. 29 and 30, hereinafter described

81.56 Proportionate point.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 19 and 20, with brass cap mkd.

T6S R24E
S19 | S20
S30
1936

from which

A cedar, 3 ins. diam., bears N.75°15'E., 107 lks. dist., mkd. B T.

raise a mound of stone; 3 ft. base, 3 ft. high, N. of cor., as there are no suitable trees available in sec. 19.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISION OF T. 6 S., R. 24 E.

Chains

Land, rolling and gently rolling, draining NW.; yellow and light colored sandstone, basalt, quartzite, and gypsum formation.

Soil, red sand, sandy loam, and red sandy clay, varying in depth from about 1 to 3 ft. on tops and slopes to several ft. in bottoms, and lying on a yellow or white chalky formation or on varied colored clay subsoils, sandstone, or gypsum, 1st. to 4th. rate. Alternate layers of varied colored clays on portions of mile, 4th. rate.

Timber, a few scattering and patches of cedar.

Undergrowth, medium dense to dense cotton brush, shad-scale, salt brush, white sagebrush, greasewood, and black sagebrush; scattering to a fair growth of gramma grass.

Fair to good winter grazing of gramma grass and brush.

S.89°38'W., on a true line bet. secs. 19 and 30.

Over-rolling and broken land, through scattering timber and medium dense undergrowth; desc. W. slope 15 ft.

2.00 Wash, 120 lks. wide, 25 ft. deep, in the bottom of draw, drains N.10°E.; asc. E. slope 20 ft.

10.50 Spur, projects N. about 6 chs. dist., thence northwesterly; desc. 25 ft.

18.60 Wash, 200 lks. wide, 15 ft. deep, in the bottom of swale, drains N.; asc. 10 ft.

23.00 Spur, projects N.15°W. approximately 40 chs. dist.; desc. 10 ft.

26.40 Wash, 20 lks. wide, 6 ft. deep, in the bottom of draw, drains N.15°W.; gradual ascent of 5 ft.

33.10 Top of ascent, bears N.15°W. and S.15°E.; desc. 15 ft.

36.00 Wash, 25 lks. wide, 7 ft. deep, in the bottom of draw, drains N.10°E.; asc. gradual E. slope 5 ft. to

36.35 Westing of 40.00 chs. from the closing cor. of secs. 29 and 30, hereinafter established and described, subsequently set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor. of sec. 30, with brass cap mkd.

$\frac{1}{4}$ S 30

1936

from which

A cedar, 24 ins. diam., bears S.18°00'E., 151 lks. dist., mkd. $\frac{1}{4}$ S 30 B T.

A cedar, 6 ins. diam., bears S.54°30'W., 291 lks. dist., mkd. $\frac{1}{4}$ S 30 B T.

40.78 Proportionate point.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor. of sec. 19, with brass cap mkd.

$\frac{1}{4}$ S 19

1936

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISION OF T. 6 S., R. 24 E.

Chains

- from which
- A cedar, 8 ins. diam., bears N.3°00'E., 126 lks. dist., mkd. B T.
- A cedar, 6 ins. diam., bears N.60°15'W., 178 lks. dist., mkd. $\frac{1}{4}$ S 19 B T.
- The bearing tree in the NE. quadrant is too scrubby to permit the full marking.
- This cor. is located 15 ft. above the $\frac{1}{4}$ sec. cor. of sec. 30.
- 44.40 Spur, 10 ft. above $\frac{1}{4}$ sec. cor. of sec. 19, slopes N. about 4 chs. dist.; desc. 15 ft.
- 47.30 Draw, drains N.15°E.; asc. 25 ft.
- 49.20 Top of ascent, bears N. and S.; desc. 25 ft.
- 57.70 Wash, 70 lks. wide, 10 ft. deep, in the bottom of draw, drains N.15°W.; asc. 15 ft.
- 60.90 Spur, slopes N. approximately 8 chs. dist.; desc. 20 ft.
- 64.40 Draw, drains N.15°E.; asc. 10 ft.
- 64.60 Leave medium heavy growth of timber, bears N.15°E. and S.15°W.
- 70.50 E. edge of bench, bears N.10°E. about 6 chs. dist., thence northwesterly, and S.15°E. approximately 4 chs. dist., thence S.70°E.; over level top to
- 78.92 The reconstructed original cor. of secs. 19, 24, 25, and 30, on the W. bdy. of the Tp., hereinbefore described.
- Land, gently rolling, rolling, and broken, draining NW.; yellow and light colored sandstone, basalt, quartzite, and gypsum formation.
- Soil, red sand, sandy loam, or red sandy clay, varying in depth from about 1 to 3 ft. on tops and slopes to several ft. in bottoms, lying on a yellow or white chalky formation, or on varied colored clay subsoils, gypsum or sandstone bedrock, 1st. to 4th. rate. Alternate layers of varied colored clays, gypsum, and sandstone on portions of mile, 4th. rate.
- Timber, scattering to a medium dense growth of cedar.
- Undergrowth, medium dense to dense cotton brush, shade-scale, salt brush, white sagebrush, greasewood, and black sagebrush; scattering to a fair growth of gramma grass.
- Fair to good winter grazing of gramma grass and brush.

PORTION OF THE SUBDIVISION OF T. 6 S., R. 24 E.

Commence the subdivisional survey at the cor. of secs. 35 and 36, on the S. bdy. of the Tp., hereinbefore described.


N.0°01'W., bet. secs. 35 and 36.

PORTION OF THE SUBDIVISION OF T. 6 S., R. 24 E.

Chains


Over nearly level bottom of swale, through scattering undergrowth.

- 2.20 An old wagon road, bears N.15°E. and S.15°W.
- 6.10 Wash, 12 lks. wide, 3 ft. deep, drains N.15°E.
- 14.80 Wagon road, bears NE. to U. S. Highway No. 40 and S.70°W. to Dead Man's Bench, thence southwesterly to Watson, Utah.
- 18.00 Same wash as noted at 6.10 chs., drains N.15°W. about 4 chs. dist. into a wash from the SW.
- 25.00 Wash, 12 lks. wide, 2 ft. deep, in the bottom of the swale, 10 ft. below cor. of secs. 35 and 36, drains NE.; asc. gradual SE. slope 40 ft.
- 35.00 Wash, 6 lks. wide, 2 ft. deep, drains SE.
- 37.30 A dirt dam about 5 chs. in length in a N. and S. direction, across swale and forming a small reservoir for stock watering purposes, bears east 10.20 chs. dist.
- 39.50 Spur, slopes SW. about 2 chs. dist.; desc. NW. slope 10 ft. to
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.



raise a mound of stone, $2\frac{1}{2}$ ft. base, 2 ft. high, W. of cor.

- 44.60 Same wash as noted at 35.00 chs., 12 lks. wide, 4 ft. deep, in the bottom of draw, 15 ft. below $\frac{1}{4}$ sec. cor., drains SW.; asc. 55 ft., along SE. slope.
- 55.70 Spur, projects N.70°E. approximately 30 chs. dist.; desc. gradually 10 ft.
- 56.00 Enter scattering timber.
- 57.30 Head of draw, drains E.; gradual ascent of 15 ft.
- 60.50 Spur, projects N.60°E. about 30 chs. dist.; desc. gradually 10 ft. to
- 67.00 Head of draw, drains NW.; continue gradual descent of 15 ft. to sec. cor., over general NW. slope.
- 74.80 Wash, 10 lks. wide, 2 ft. deep, drains NE.
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 25, 26, 35, and 36, with brass cap mkd.



raise a mound of stone, 4 ft. base, $2\frac{1}{2}$ ft. high, W. of cor.

Land, nearly level bottom of swale, S. 38.00 chs.; gently

PORTION OF THE SUBDIVISION OF T. 6 S., R. 24 E.

Chains

rolling and rolling, N. 42.00 chs.; light colored and yellow sandstone formation; drainage E. and NE., thence generally to the N.

Soil, red sand, sandy loam, or red sandy clay, about 6 ins. to 2 ft. deep on tops and slopes and several ft. deep in bottoms, lying on a yellow or white chalky formation, or on varied colored clay subsoils or on sandstone bedrock, 1st. to 4th. rate. Alternate layers of varied colored clays and sandstone on portions of mile, 4th. rate.

Timber, a few scattering cedar.

Undergrowth, medium dense to dense black sagebrush, shade-scale, cotton brush, greasewood, and salt brush; sparse to a dense growth of gramma grass.

Fair fall and winter grazing land.

East, on a random line bet. secs. 25 and 36.

40.00 Set temp. 1/4 sec. cor.

80.14 Intersect the E. bdy. of the Tp., 5 lks. S. of the cor. of secs. 25, 30, 31, and 36, which is an iron post, 2 ins. diam., extending 9 ins. above ground, firmly set, correctly marked, and witnessed on the W. by a mound of stone, 3 ft. base, 1 ft. high.

Thence,

S.89°58'W., on a true line bet. secs. 25 and 36.

Desc. gentle W. slope 30 ft., across bottom of swale, through medium dense undergrowth.

6.60 Wash, 15 lks. wide, 4 ft. deep, drains N.60°W.

8.90 Wash, 20 lks. wide, 5 ft. deep, drains NW.

20.10 An old wagon road, bears NW. and SE.

22.50 A well traveled automobile and wagon road, bears N.15°W. to U. S. Highway No. 40 and S.15°E. to Watson, Utah.

27.70 Branch of the same road as noted at 22.50 chs., bears N.30°E. and S.10°W.

31.60 E. bank of a main wash, 20 ft. high, bears N.20°E. and S.20°W.; wash drains N.20°E. in the bottom of the swale.

34.90 W. bank of the wash, 20 ft. high, bears N.20°E. and S.20°W.; over level land to

40.07 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with a sandstone, 8x6x2 ins., mkd. X, deposited at the base, for 1/4 sec. cor., with brass cap mkd.

S 25
1/4
S 36
1936

41.00 Wagon road, bears N.25°E. to U. S. Highway No. 40 and S.25°W. to Dead Man's Bench, thence southwesterly to Watson, Utah.

PORTION OF THE SUBDIVISION OF T. 6 S., R. 24 E.

Chains

52.60 Wash, 4 lks. wide, 2 ft. deep, drains N.60°E.; leave level bottom of swale, bears NE. and SW.; begin ascent of 45 ft., over SE. slope.

67.00 Spur, slopes N.25°E. approximately 20 chs. dist.; gradual descent of 10 ft.

73.10 Draw, heads SW. about 8 chs. dist., drains NE.; asc. 20 ft.

78.00 Top of ascent, bears NE. and SW.; desc. gradual NW. slope 5 ft. to

80.14 The cor. of secs. 25, 26, 35, and 36.

Land, nearly level and gently rolling bottom of swale, E. 52.60 chs.; rolling and broken, W. 27.54 chs.; light colored and yellow sandstone formation; drainage NW. and NE., thence northerly.

Soil, red sand, sandy loam, or red sandy clay, varying in depth from about 6 ins. to 2 ft. on tops and slopes to 30 ft. in the bottom of swale, and lying on a yellow or white chalky formation, or on varied colored clay subsoils or on sandstone bedrock, 1st. to 4th. rate. Alternate layers of varied colored clays and sandstone on portions of mile, 4th. rate.

Timber, a few scattering scrubby cedar on W. 1/2 mile.

Undergrowth, medium dense to dense black sagebrush, shadscale, cotton brush, greasewood, and salt brush; sparse to a fair growth of gramma grass.

Fair fall and winter grazing land.

N.0°01'W., on a true line bet. secs. 25 and 26.

Over rolling and broken land, through scattering timber and medium dense undergrowth; desc. NW. slope 15 ft.


11.30 Wash, 12 lks. wide, 3 ft. deep, in the bottom of hollow, drains NE.; asc. gradual SE. slope 20 ft.

19.80 An old wagon road, bears N.70°E. and W.

23.10 Ridge, bears N.25°E. and S.25°W.; gradual descent of 25 ft., over NW. slope.

38.50 Wash, 6 lks. wide, 4 ft. deep, in the bottom of draw, which heads E. about 6 chs. dist. and drains W.; asc. S. slope 10 ft. to

40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/4 sec. cor., with brass cap mkd.



from which

A cedar limb, 4 ins. diam., bears N.70°30'E., 135 1/2 lks. dist., mkd. 1/4 S 25 B T.


PORTION OF THE SUBDIVISION OF T. 6 S., R. 24 E.

Chains

- ..A cedar limb, 4 ins. diam., bears N.46°30'W., 149 lks. dist., mkd. $\frac{1}{4}$ S. 26 B. T.
- 44.80 Rocky spur, 15 ft. above $\frac{1}{4}$ sec. cor., slopes W. about 2 chs. dist.; desc. general NW. slope 60 ft.
- 59.60 Wash, 12 lks. wide, 5 ft. deep, drains N.15°E.
- 62.00 Wash, 10 lks. wide, 3 ft. deep, in the bottom of draw, drains NE.; asc. gentle SE. slope 15 ft. to
- 73.60 Intersect the S. bdy. of sec. 23, S.89°32'W. 1.05 chs. dist. from the cbr. of secs. 23 and 24, hereinbefore described, and at the point of intersection, set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for closing cor. of secs. 25 and 26, with brass cap mkd.
- | | |
|----------|-----|
| S23 | |
| S26 | S25 |
| T6S R24E | |
| CC | |
| 1936 | |
- of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, S. of cor. raise a mound
- Land, rolling and gently rolling, draining to the NE.; outcroppings of blue limestone and light colored and yellow sandstone formation.
- Soil, red sand, sandy loam, or red sandy clay, about 6 ins. to 2 ft. deep on tops and slopes and several ft. deep in bottoms, and lying on a yellow or white chalky formation, or on varied colored clay subsoils or on sandstone bedrock, 1st. to 4th. rate. Alternate layers of varied colored clays and sandstone on portions of mile, 4th. rate.
- Timber, a few scattering cedar.
- Undergrowth, medium dense to dense black sagebrush, shade-scale, cotton brush, greasewood, and salt brush; sparse to a dense growth of gramma grass.
- Fair fall and winter grazing land.
-
- From the cor. of secs. 34 and 35, on the S. bdy. of the Tp., hereinbefore described,
- N.0°02'W., bet. secs. 34 and 35.
- Asc. rolling and broken general SE. slope 35 ft., through scattering timber and undergrowth.
- 20.80 An old wagon road, bears N.70°E. and S.25°W., on top of ridge, bearing same as road; desc. gradual NW. slope 45 ft. to witness $\frac{1}{4}$ sec. cor.
- 21.00 Enter medium dense undergrowth, bears NW. and SE.
- 26.20 An old wagon road, bears NW. and SE.
- 39.00 Set an iron post, 3 ft. long, 1 in. diam., 22 ins. in the ground to solid rock, and in a mound of stone, 4 ft. base, 1 ft. high, for witness $\frac{1}{4}$ sec. cor., with brass cap mkd.

PORTION OF THE SUBDIVISION OF T. 6 S., R. 24 E.

Chains



1936

from which

A cedar, 10 ins. diam., bears S.30°30'E., 118 lks. dist., mkd. W C $\frac{1}{4}$ S 35 B T.

A cedar, 20 ins. diam., bears N.80°00'W., 105 lks. dist., mkd. W C $\frac{1}{4}$ S 34 B T.

- 40.00 True point for $\frac{1}{4}$ sec. cor., falls in wash, 20 lks. wide, 5 ft. deep, in the bottom of draw, 10 ft. below witness $\frac{1}{4}$ sec. cor., draining NE., and making it impracticable to establish a cor. monument.
- 43.00 Spur, 5 ft. above true point for $\frac{1}{4}$ sec. cor., slopes E. about 2 chs. dist.; desc. N. slope 30 ft.
- 44.60 Wash, 15 lks. wide, 1 ft. deep, in the bottom of draw, drains N.60°E.; asc. SE. slope 25 ft.
- 53.60 Spur, from SW., projects N.10°W. approximately 8 chs. dist.; desc. 65 ft., along NE. slope.
- 58.60 Leave timber, at the base of spur, bearing NW. and SE.; desc. gradually 70 ft., over nearly level land.
- 66.80 Wash, 10 lks. wide, 2 ft. deep, drains NE.
- 78.40 Wash, 15 lks. wide, 5 ft. deep, in the bottom of swale, drains NW.; asc. gradual SW. slope 5 ft. to
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 26, 27, 34, and 35, with brass cap mkd.

T6S R24E
 S27|S26
 S34|S35
 1936

raise a mound of stone, 2 $\frac{1}{2}$ ft. base, 2 ft. high, W. of cor.

Land, rolling and broken, gently rolling, and nearly level, and draining generally to the NE. and NW.; outcroppings of light colored, yellow, and gray sandstone formation.

Soil, red sand, sandy loam, or red sandy clay, varying in depth from a few ins. to about 3 ft. on tops and slopes and to several ft. in bottoms, and lying on a yellow, brown, or white chalky clay subsoil or on sandstone bed-rock, 1st. to 4th. rate. Alternate layers of varied colored clays and sandstone on some of the tops and slopes, 4th. rate.

Timber, cedar.

Undergrowth, scattering to medium dense growth of black sagebrush, shadscale, cotton brush, greasewood, and salt brush; sparse to a dense growth of gramma grass.

Poor to fair fall and winter grazing land.

PORTION OF THE SUBDIVISION OF T. 6 S., R. 24 E.

Chains

East, on a random line bet. secs. 26 and 35.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

30.02 Intersect N. and S. line, 7 lks. S. of the cor. of secs. 25, 26, 35, and 36.

Thence,

S. $89^{\circ}57'W.$, on a true line bet. secs. 26 and 35.

Over rolling and broken land, through medium dense undergrowth; desc. gradual NW. slope 30 ft.

14.20 Wash, 10 lks. wide, 2 ft. deep, in the bottom of draw, drains NE.; gradual ascent of 100 ft., over NE. slope.

32.30 Ridge, bears N. $20^{\circ}W.$ and S. $20^{\circ}E.$; enter a medium heavy growth of timber, bears same as ridge; desc. SW. slope 35 ft. to

40.01 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

S. 26

$\frac{1}{4}$ ———

S 35

1936

from which

A cedar, 12 ins. diam., bears N. $87^{\circ}30'E.$, 152 lks. dist., mkd. $\frac{1}{4}$ S 26 B T.

A cedar, 9 ins. diam., bears S. $42^{\circ}15'E.$, 55 lks. dist., mkd. $\frac{1}{4}$ S 35 B T.

51.80 Wash, 6 lks. wide, 1 ft. deep, in the bottom of draw, 20 ft. below $\frac{1}{4}$ sec. cor., drains N. $20^{\circ}W.$; asc. gradual NE. slope 10 ft.

56.30 Spur, projects N. $20^{\circ}W.$ approximately 20 chs. dist., thence northwesterly; desc. SW. slope 65 ft.

69.80 Wash, 8 lks. wide, 1 ft. deep, in the bottom of draw, drains NW.; gradual ascent of 5 ft.

75.10 Spur, slopes NW. about 8 chs. dist.; leave timber, bears NW. and SE.; desc. gradual SW. slope 35 ft. to

30.02 The cor. of secs. 26, 27, 34, and 35.

Land, gently rolling, rolling, and broken, with outcroppings of light colored, yellow, and gray sandstone, and blue limestone formation; drainage generally to the NE., E. 56.80 chs.; W. 23.22 chs. drain to the NW.

Soil, red sand, sandy loam, or red sandy clay, about 6 ins. to 3 ft. deep on tops and slopes and several ft. deep in bottoms, and lying on a yellow or white chalky formation, or on varied colored clay subsoils or on bedrock, 1st. to 4th. rate.

Timber, cedar.

Undergrowth, medium dense black sagebrush, shadscale, cotton brush, greasewood, and salt brush; sparse to a fair growth of gramma grass.

Fair fall and winter grazing land.

PORTION OF THE SUBDIVISION OF T. 6 S., R. 24 E.

| Chains | |
|--------|---|
| | N.0°02'W., on a random line bet. secs. 26 and 27. |
| 40.00 | Set temp. $\frac{1}{4}$ sec. cor. |
| 73.23 | Fall 23 $\frac{1}{2}$ lks. E. of the cor. of secs. 22, 23, 26, and 27, hereinbefore described. |
| | Thence, |
| | S.0°13'E., on a true line bet. secs. 26 and 27. |
| | Over gently rolling land, through medium dense undergrowth; asc. gradually 80 ft. |
| 14.60 | Enter a medium heavy growth of timber, bears E. and NW. |
| 24.10 | Top of ascent, bears NW. and SE.; desc. SW. slope 55 ft. |
| 30.50 | Wash, 10 lks. wide, 1 ft. deep, in the bottom of draw, from NE., drains W. about 10 chs. dist., thence N.60°W.; asc. N. slope 20 ft. to |
| 33.23 | Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd. |
| | $\frac{1}{4}$ S 27 S 26 1936 |
| | from which |
| | <ul style="list-style-type: none"> • A cedar, 12 ins. diam., bears N.53°00'E., 85 lks. dist., mkd. $\frac{1}{4}$ S 26 B T. • A cedar, 4 ins. diam., bears N.70°00'W., 129 lks. dist., mkd. $\frac{1}{4}$ S 27 B T. |
| 33.90 | Top of ascent, 20 ft. above $\frac{1}{4}$ sec. cor., bears N.80°W. and S.80°E.; desc. SW. slope 75 ft. |
| 47.00 | Wash, 10 lks. wide, 1 ft. deep, in the bottom of draw, drains NW.; asc. 35 ft. |
| 49.70 | Spur, projects NW. approximately 15 chs. dist.; desc. 15 ft., across the head of draw, draining NW. to |
| 54.80 | Spur, from S.70°E., projects N.70°W. about 10 chs. dist., thence northwesterly; desc. SW. slope 65 ft. |
| 66.60 | Wash, 8 lks. wide, 1 ft. deep, in the bottom of draw, drains N.70°W.; asc. gradually 5 ft., over nearly level land to |
| 73.23 | The cor. of secs. 26, 27, 34, and 35. |
| | Land, nearly level, rolling, and gently rolling, draining to the NW.; outcroppings of light colored, yellow, and gray sandstone formation. |
| | Soil, red sand, sandy loam, or red sandy clay, varying in depth from a few ins. to about 3 ft. on tops and slopes and to several ft. in bottoms, and lying on a yellow, brown, or a white chalky clay subsoil or on sandstone bed rock, 1st. to 4th. rate. Alternate layers of varied colored clays and sandstone on portions of mile, 4th. rate. |

PORTION OF THE SUBDIVISION OF T. 6 S., R. 24 E.

Chains

Timber, cedar.

Undergrowth, scattering to medium dense black sagebrush, shadscale, cotton brush, greasewood, and salt brush; sparse to a scattering growth of gramma grass.

Poor to fair fall and winter grazing land.

From the cor. of secs. 33 and 34, on the S. bdy. of the Tp., hereinbefore described,

N.0°02'W., bet. secs. 33 and 34.

Over rolling, rough, and broken land, through a medium heavy growth of timber and scattering undergrowth; desc. NW. slope 25 ft.

1.40 Wash, 6 lks. wide, 1 ft. deep, in the bottom of draw, drains NE.; asc. SE. slope 30 ft.


10.50 Spur, slopes N.70°E. about 3 chs. dist.; desc. abrupt general NE. slope 45 ft.

23.50 Base of abrupt descent, bears N.20°W. approximately 15 chs. dist., thence N.20°E., and S.20°E. about 5 chs. dist., thence S.; leave timber, bears same as base of steep descent; desc. gradually 50 ft., over nearly level bottom of swale to

38.80 Wash, 50 lks. wide, 10ft. deep, drains N.10°E.; asc. 10 ft. to

40.00 True point for $\frac{1}{4}$ sec. cor., falls in wash, 6 lks. wide, 1 ft. deep, draining N.10°E., making the establishment of a cor. monument impracticable.

41.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for witness $\frac{1}{4}$ sec. cor., with brass cap mkd.



of stone, $2\frac{1}{2}$ ft. base, $2\frac{1}{2}$ ft. high, W. of cor. raise a mound

This cor. stands 10 ft. above the true point for $\frac{1}{4}$ sec. cor.

54.50 Wash, 10 lks. wide, 2 ft. deep, drains NE.

61.70 Wash, from E., 200 lks. wide, 20ft. deep, drains NE. about 2 chs. dist., thence northerly.

80.00 True point for cor. of secs. 27, 28, 33, and 34, falls in wash, 200 lks. wide, 25 ft. deep, draining N.15°E., where the establishment of a cor. monument is impracticable. The true point for this sec. cor. is located 25 ft. below the witness $\frac{1}{4}$ sec. cor.

N.0°02'W., on line bet. secs. 27 and 28, 3.00 chs. dist. from the true point for cor. of secs. 27, 28, 33, and 34, a witness cor. to the cor. of said secs. is hereinafter established and described.

PORTION OF THE SUBDIVISION OF T. 6 S., R. 24 E.

Chains

Land, rolling, rough, and broken, S. 23.50 chs.; nearly level bottom of swale, N. 56.50 chs.; outcroppings of light colored, yellow, and gray sandstone formation; general drainage to the N.

Soil, red sand, sandy loam, or red sandy clay, varying in depth from a few ins. to about 3 ft. on tops and slopes and from about 5 to 25 ft. in bottoms, and lying on a yellow, brown, or white chalky clay subsoil or on sandstone bedrock, 1st. to 4th. rate. Alternate layers of varied colored clays and sandstone on portions of mile, 4th. rate.

Timber, cedar.

Undergrowth, scattering to medium dense black sagebrush, shadscale, cotton brush, greasewood, white sagebrush, and salt brush; sparse to a dense growth of gramma grass.

Poor to good fall and winter grazing land.

From the true point for cor. of secs. 27, 28, 33, and 34, East, on a random line bet. secs. 27 and 34.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.04 Intersect N. and S. line, at the cor. of secs. 26, 27, 34, and 35.

Thence,

West, on a true line bet. secs. 27 and 34.

Desc. gradually 15 ft., over nearly level land, through medium dense undergrowth.

1.80 Wash, 100 lks. wide, 15 ft. deep, in the bottom of swale, drains N. about 2 chs. dist., thence N.20°W.; asc. gradual E. slope 75 ft.

6.80 Wash, 70 lks. wide, 15 ft. deep, drains N.10°E.

10.00 Wash, 60 lks. wide, 15 ft. deep, drains NE.

16.80 Spur, projects NW. about 3 chs. dist., thence northeasterly; desc. 55 ft., through scattering timber.

21.20 Wash, 50 lks. wide, 15 ft. deep, in the bottom of draw, drains N.20°W.; asc. E. slope 30 ft.

26.10 Spur, projects N. approximately 15 chs. dist.; desc. general W. slope 45 ft. to

40.02 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

S 27
 $\frac{1}{4}$ —————
 S 34
 1936

from which

. A cedar, 7 ins. diam., bears S.23°30'W., 92 lks. dist., mkd. $\frac{1}{4}$ S 34 B T.

PORTION OF THE SUBDIVISION OF T. 6 S., R. 24 E.

Chains

- A cedar, 3 ins. diam., bears N.34°15'W., 84 lks. dist., mkd. B. T.
- 48.90 Wash, 100 lks. wide, 20 ft. deep, in the bottom of swale, 50 ft. below $\frac{1}{2}$ sec. cor., drains N.20°W.; asc. E. slope 40 ft.
- 57.80 Spur, projects N.25°W. approximately 10 chs. dist., thence northeasterly; leave timber; desc. SW. slope 85 ft.
- 77.20 E. edge of wash, 200 lks. wide, 25 ft. deep, drains N.20°W.; over level bottom of swale.
- 79.90 E. bank of wash, 25 ft. high, bears N.15°E. and S.15°W.
- 80.04 The true point for cor. of secs. 27, 28, 33, and 34, which falls in wash.

Land, nearly level, gently rolling, and rolling and broken, draining generally to the N.; outcroppings of light colored, yellow, and gray sandstone formation.

Soil, red sand, sandy loam, or red sandy clay, varying in depth from a few ins. to about 3 ft. on tops and slopes and from about 3 to 30 ft. in bottoms, and lying on a yellow, brown, or white chalky clay subsoil or on sandstone bedrock, 1st. to 4th. rate. Alternate layers of varied colored clays and sandstone on some of the tops and slopes, 4th. rate.

Timber, varies from a scattering to a medium heavy growth of cedar.

Undergrowth, scattering to medium dense growth of black sagebrush, shadscale, cotton brush, greasewood, and salt brush; sparse to a fair growth of gramma grass.

Fair to good fall and winter grazing land.

From the true point for cor. of secs. 27, 28, 33, and 34, N.0°02'W., on a true line bet. secs. 27 and 28.

Desc. abruptly 20 ft. to

- 9.30 Bottom of the wash, drains N.15°E.; steep ascent of 25 ft. to
- 1.90 W. bank of the wash, bears N.15°E. and S.15°W.; over nearly level bottom of swale, through scattering undergrowth.
- 3.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for witness cor. of secs. 27, 28, 33, and 34, with brass cap mkd.

T6S R24E

S28|S27

S33|S34

BC

1936


of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor. raise a mound

- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the

PORTION OF THE SUBDIVISION OF T. 6 S., R. 24 E.

Chains

ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.



raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

This $\frac{1}{4}$ sec. cor. is located 20 ft. below the witness cor. of secs. 27, 28, 33, and 34.

59.20 Wash, 210 lks. wide, 25 ft. deep, drains N.20°W.

74.18 Intersect the S. bdy. of sec. 22, N.89°37'E. 2.40 chs. dist. from the cor. of secs. 21 and 22, hereinbefore described, and at the point of intersection, set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, with a sandstone, 4x4x2 ins., mkd. X, deposited at the base, for closing cor. of secs. 27 and 28, with brass cap mkd.



This cor. is located 20 ft. below the $\frac{1}{4}$ sec. cor.

Land, nearly level bottom of swale, draining to the N.; light colored, yellow, and gray sandstone formation.

Soil, red sandy loam or red sandy clay, about 3 to 30 ft. deep, lying on varied colored clay subsoils or on sandstone bedrock, 1st. to 4th. rate.

Undergrowth, scattering to medium dense black sagebrush, shadscale, cotton brush, white sagebrush, salt brush, and greasewood; sparse to medium dense growth of gramma grass.

Fair fall and winter grazing land. No timber.

From the cor. of secs. 32 and 33, on the S. bdy. of the Tp., hereinbefore described,

N.0°03'W., bet. secs. 32 and 33.

Desc. gradually 10 ft., along general NE. slope, through a medium heavy growth of timber and scattering undergrowth.

0.50 Draw, heads W. about 4 chs. dist., drains N.70°E.; asc. gradual SE. slope 25 ft.

13.20 S. edge of bench, bears N.15°E. and S.15°W.; leave timber, bears same as edge of bench, and enter medium dense undergrowth; desc. gradually 10 ft., over gently rolling top.

23.40 Wash, 6 lks. wide, 2 ft. deep, in the bottom of draw, drains W. about 3 chs. dist., thence northwesterly; gradual ascent of 5 ft.

PORTION OF THE SUBDIVISION OF T. 6 S., R. 24 E.

Chains

- 27.00 Spur, slopes N.60°W. about 6 chs. dist.; desc. gradually 20 ft.
- 33.30 Wash, 8 lks. wide, 2 ft. deep, in the bottom of draw, drains N.80°W.; asc. gradual SW. slope 15 ft. to
- 40.00 On top of ascent, bearing NW. and SE., set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with a sandstone, 7x4x3 ins., mkd. X, deposited at the base, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$\frac{1}{4}$
 S 32 | S 33

1936

from which

A cedar, 8 ins. diam., bears S.87°40'E., 626 $\frac{1}{2}$ lks. dist., mkd. $\frac{1}{4}$ S 33 B T.

There are no trees available for marking in sec. 32.

- 54.60 Wash, 10 lks. wide, 2 ft. deep, in the bottom of draw, 30 ft. below $\frac{1}{4}$ sec. cor., drains NW.; asc. gradual SW. slope 15 ft.
- 63.60 Spur, slopes N.80°W. about 6 chs. dist.; gradual descent of 25 ft.
- 71.30 Wash, 8 lks. wide, 1 ft. deep, in the bottom of draw, drains N.70°W.; asc. gradual SW. slope 10 ft. to
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 28, 29, 32, and 33, with brass cap mkd.

T6S R24E

S29 | S28
 S32 | S33

1936

from which

A cedar, 4 ins. diam., bears N.63°41'E., 90 lks. dist., mkd. T 6 S R 24 E S 28 B T.

A cedar, 6 ins. diam., bears S.54°51'E., 83 $\frac{1}{2}$ lks. dist., mkd. T 6 S R 24 E S 33 B T.

A cedar, 3 ins. diam., bears S.36°33'W., 82 lks. dist., mkd. B T.

A cedar, 7 ins. diam., bears N.30°05'W., 103 lks. dist., mkd. T 6 S R 24 E S 29 B T.

Land, rolling and broken bad lands, draining generally NE., S. 13.20 chs.; gently rolling and rolling top of bench, draining NW., N. 66.80 chs.; yellow and light colored sandstone formation.

Soil, shallow red sand or red sandy clay, lying on varied colored clay subsoils or on sandstone bedrock, 3rd. and 4th. rate, on S. 13.20 chs.; red sand or red sandy loam, about 1 to 4 ft. deep, lying on a yellow, brown, or white chalky clay subsoil, 1st. to 3rd. rate, on N. 66.80 chs.

Timber, cedar.

PORTION OF THE SUBDIVISION OF T. 6 S., R. 24 E.

Chains

Undergrowth, black sagebrush, shadscale, cotton brush, white sagebrush, salt brush, and greasewood, scattering on S. 13.20 chs., medium dense to dense on N. 66.80 chs.; fair growth of gramma grass on top of bench.

Fall and winter grazing land, poor to fair on S. 13.20 chs.; good on N. 66.80 chs.

East, on a random line bet. secs. 28 and 33.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.06 Intersect N. and S. line, 3 lks. N. of the true point for cor. of secs. 27, 28, 33, and 34.

Thence,

N.89°59'W.; on a true line bet. secs. 28 and 33.

Desc. abruptly 20 ft. to

0.30 Bottom of the wash, drains N.15°E.; steep ascent of 25 ft. to

1.70 W. bank of the wash, bears N.15°E. and S.15°W.; asc. gentle E. slope 10 ft., over nearly level bottom of swale, through scattering undergrowth.

17.80 Enter a medium heavy growth of timber and undergrowth, bears NW. and SE.

18.00 Leave nearly level bottom of swale, bears N. and S., begin more abrupt ascent of 55 ft., over E. slope.

20.70 Spur, from SW., projects N. approximately 6 chs. dist., thence N.10°E. about 4 chs. dist.; desc. 25 ft.

24.40 Wash, 12 lks. wide, 2 ft. deep, in the bottom of draw, heads SE. about 4 chs. dist., drains NW. approximately 6 chs. dist., thence northeasterly; asc. E. slope 40 ft.

32.10 Narrow spur, slopes N. about 8 chs. dist.; desc. 50 ft.

37.70 Draw, drains N.; asc. 30 ft.

39.60 Low spur, slopes N. about 2 chs. dist.; desc. W. slope 5 ft. to

40.03 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

S 28

$\frac{1}{4}$

S 33

1936

from which

A cedar, 6 ins. diam., bears S.65°15'W., 32 lks. dist., mkd. $\frac{1}{4}$ S 33 B T.

A cedar, 8 ins. diam., bears N.53°30'W., 43 lks. dist., mkd. $\frac{1}{4}$ S 28 B T.

41.30 Draw, 15 ft. below $\frac{1}{4}$ sec. cor., drains NE.; asc. NE. slope 55 ft.

PORTION OF THE SUBDIVISION OF T. 8 S., R. 24 E.

Chains

- 51.50 Spur, from SE., projects N.10°W. approximately 8 chs. dist., thence northeasterly; desc. SW. slope 30 ft.
- 57.40 Draw, drains N.15°W. about 3 chs. dist., thence northeasterly; asc. NE. slope 65 ft.
- 75.00 An old wood road, bears N.60°W. and S.60°E.
- 77.40 E. edge of bench, bears N.20°W. and S.60°E.; timber becomes scattering, bearing NW. and SE.; desc. gradually 5 ft. to sec. cor., over gently rolling SW. slope.
- 80.06 The cor. of secs. 28, 29, 32, and 33.
- Land, rolling and broken bad lands, draining generally NE., E. 77.40 chs.; gently rolling top of bench, draining NW., W. 2.66 chs.; outcroppings of yellow and light colored sandstone formation.
- Soil, red sand, sandy loam, or red sandy clay, varying in depth from a few ins. to about 3 ft. on tops and slopes and from about 3 to 30 ft. in bottoms, and lying on a yellow, brown, or white chalky clay subsoil or on sandstone bedrock, 1st. to 4th. rate. Alternate layers of varied colored clays and sandstone on some of the tops and slopes, 4th. rate.
- Timber, cedar.
- Undergrowth, black sagebrush, shadscale, cotton brush, white sagebrush, salt brush, and greasewood; scattering gramma grass on bad lands, and a fair growth on top of bench.
- Fall and winter grazing land, poor to fair on E. 77.40 chs., good on W. 2.66 chs.
-
- N.0°03'W., on a true line bet. secs. 28 and 29.
- Over gently rolling top of bench, through scattering timber and dense undergrowth; asc. gradual SW. slope 5 ft.
- 8.60 An old wood road, bears N.60°W. and S.60°E., on top of ascent, bearing same as road; desc. gradual NE. slope 5 ft.
- 13.80 N. edge of bench, bears N.70°W. and S.70°E.; desc. NE. slope 70 ft.
- 22.00 Draw, drains NE.; asc. SE. slope 25 ft.
- 29.00 S. edge of bench, bears NE. and SW.; desc. gradually 10 ft., over gently rolling top.
- 33.80 N. edge of bench, bears NW. about 6 chs. dist., thence northerly, and S.80°E.; desc. gradual NE. slope 25 ft. to
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

S 29 | S 28

1936

from which

. . . PORTION OF THE SUBDIVISION OF T. 6 S., R. 24 E.

Chains

A cedar, 3 ins. diam., bears N.31°12'E., 386 lks. dist., mkd. B T.

A cedar, 12 ins. diam., bears N.22°56'W., 483 lks. dist., mkd. $\frac{1}{4}$ S. 29 B. T.

44.80 Draw, heads S.15°E. about 6 chs. dist., 25 ft. below $\frac{1}{4}$ sec. cor., drains N.15°W. approximately 6 chs. dist., thence northeasterly; gradual ascent of 5 ft.

48.20 Spur, slopes W. about 1.50 chs. dist.; desc. 25 ft.

54.60 Draw, drains NE.; asc. SE. slope 40 ft.

69.90 S. edge of bench, bears N.70°E. and S.15°W.; gradual descent of 10 ft., over nearly level top to

73.40 Intersect the S. bdy. of sec. 21, N.89°24'E. 2.19 chs. dist. from the cor. of secs. 20 and 21, hereinbefore described, and at the point of intersection, set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, with a basalt stone, 6x4x2 ins., mkd. X, deposited at the base, for closing cor. of secs. 28 and 29, with brass cap mkd.

S21
S29|S28
T6S R24E
CC
1936

There are no bearing trees available.

Land, nearly level and gently rolling top of bench, draining generally to the NW., and broken by rolling bad lands, which drain to the NE.; yellow and light colored sandstone, and basalt formation.

Soil, shallow red sand or red sandy clay, lying on varied colored clay subsoils or on sandstone bedrock, 3rd. and 4th. rate, on rolling and broken bad lands; red sand or red sandy loam, about 1 to 4 ft. deep, lying on a yellow, brown, or white chalky clay subsoil, 1st. to 3rd. rate, on top of bench.

Timber, cedar.

Undergrowth, black sagebrush, shadscale, cotton brush, white sagebrush, salt brush, and greasewood, scattering on rolling and broken bad lands, medium dense to dense on top of bench; fair growth of gramma grass on top of bench.

Fall and winter grazing land, poor to fair on rolling and broken bad lands, good on top of bench.

From the cor. of secs. 31 and 32, on the S. bdy. of the Tp., hereinbefore described,


N.0°04'W., bet. secs. 31 and 32.

Over rolling, rough, and broken bad lands, through scattering timber and undergrowth; desc. NE. slope 15 ft.

2.00 Draw, drains N.70°W.; asc. 50 ft.

... PORTION OF THE SUBDIVISION OF T. 6 S., R. 24 E.

- Chains
- 4.20 SW. extremity of spur, from NE.; desc. 20 ft.
- 7.20 Draw, drains S.15°W.; asc. 50 ft.
- 17.10 Spur, projects S.30°W. approximately 10 chs. dist.; desc. 25 ft.
- 19.90 Draw, drains S.30°W.; asc. general SW. slope 55 ft.
- 24.90 Leave rolling, rough, and broken bad lands, bears S.70°E. and S.70°W., on S. edge of bench; desc. gradually 40 ft., over rolling and gently rolling top.
- 28.20 Wagon road, bears E. and W. about 4 chs. dist., thence N.80°W.
- 39.30 Wash, 30 lks. wide, 5 ft. deep, in the bottom of draw, drains NE. about 2 chs. dist., thence N.15°W.; asc. SE. slope 5 ft. to
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.




from which

A cedar limb, 3 ins. diam., bears S.65°13'E., 68 $\frac{1}{2}$ lks. dist., mkd. B T.

A cedar, 4 ins. diam., bears N.66°51'W., 433 lks. dist., mkd. $\frac{1}{4}$ S 31 B T.

- 49.60 Low spur, 5 ft. above $\frac{1}{4}$ sec. cor., slopes N.70°E. about 4 chs. dist.; gradual descent of 30 ft.
- 59.20 Same wash as noted at 39.30 chs., 50 lks. wide, 10 ft. deep, in the bottom of draw, drains NW.; asc. gradual general E. slope 20 ft.
- 61.90 Wash, 70 lks. wide, 5 ft. deep, drains W. about 5 chs. dist., thence northwesterly.
- 66.50 Top of ascent or N. edge of bench, bears E. and W.; desc. 20 ft.
- 68.90 Draw, drains W.; asc. 25 ft.
- 74.40 Spur, slopes S.80°W. about 3 chs. dist.; desc. 20 ft.
- 75.60 Draw, drains S.60°W.; asc. abrupt general S. slope 50 ft. to.
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 29, 30, 31, and 32, with brass cap mkd.



from which

A cedar, 3 ins. diam., bears N.27°00'E., 159 lks. dist., mkd. B T.

PORTION OF THE SUBDIVISION OF T. 6 S., R. 24 E.

Chains

A cedar, 3 ins. diam., bears S.42°00'E., 58½
lks. dist., mkd. B T.

A cedar, 5 ins. diam., bears S.39°47'W., 119½
lks. dist., mkd. T 6 S R 24 E S 31 B T.

A cedar limb, 5 ins. diam., bears N.54°21'W., 170½
lks. dist., mkd. T 6 S R 24 E S 30 B T.

Land, abrupt, rolling, rough, and broken bad lands, S. 24.90 chs. and N. 13.50 chs.; gently rolling and rolling top of bench, remainder of mile; drainage SW., S. 24.90 chs.; N. 55.10 chs. drain generally to the NW.; light colored sandstone, shale, and gypsum formation.

Soil; alternate layers of varied colored clays, sandstone, shale, and gypsum, 4th. rate, on bad lands; red sandy loam or red sandy clay, about 2 to 3 ft. deep, lying on a brown, yellow, or white chalky clay subsoil, or on bedrock, 2nd. and 3rd. rate, on top of bench.

Timber, sparse to scattering cedar.

Undergrowth, shadscale, cotton brush, black sagebrush, salt brush, white sagebrush, and greasewood, sparse to scattering on bad lands, scattering to medium dense on top of bench; fair to good growth of gramma grass on top of bench.

Fall and winter grazing land, poor on bad lands, fair to good on top of bench.

East, on a random line bet. secs. 29 and 32.

40.00 Set temp. ¼ sec. cor.

80.08 Intersect N. and S. line, 2 lks. N. of the cor. of secs. 28, 29, 32., and 33.

Thence,

N.89°59'W., on a true line bet. secs. 29 and 32.

Over gently rolling top of bench, through scattering timber and dense undergrowth; desc. gradual SW. slope 40 ft.

2.10 Wagon road, bears north to U.S. Highway No. 40 and south to Dead Man's Bench, and thence to Watson, Utah.

16.90 Wash, 15 lks. wide, 3 ft. deep, in the bottom of draw, drains N.15°W.; asc. gradual E. slope 15 ft.

22.00 Spur, slopes N. about 4 chs. dist.; gradual descent of 10 ft.

23.10 Wash, 8 lks. wide, 2 ft. deep, in the bottom of draw, drains N.10°E.; asc. gradually 15 ft.

29.20 Spur, slopes N.10°E. approximately 10 chs. dist.; gradual descent of 15 ft.

31.50 Draw, drains N.20°E.; asc. gradual E. slope 20 ft.

34.00 Spur, slopes N. about 6 chs. dist.; gradual descent of 10 ft.

PORTION OF THE SUBDIVISION OF T. 6 S., R. 24 E.

Chains

- 38.80 Wash, 15 lks. wide, 2 ft. deep, in the bottom of draw, drains N.20°E.; asc. gradual NE. slope 5 ft. to
- 40.04 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor.; with brass cap mkd.
- S 29
 $\frac{1}{4}$ —————
S 32
1936
- from which
- A cedar, 8 ins. diam., bears S.23°15'W., 312 lks. dist., mkd. $\frac{1}{4}$ S 32 B T.
- A cedar, 5 ins. diam., bears N.87°30'W., 1054 lks. dist., mkd. $\frac{1}{4}$ S 29 B T.
- 48.90 An old wagon road, bears N.60°W. and SE.
- 49.00 Enter a medium heavy growth of timber, bears NW. and SE.
- 52.20 W. edge of bench, bears NW. and SE., enter rolling, rough, and broken bad lands, 20 ft. above $\frac{1}{4}$ sec. cor.; desc. 75 ft., over SW. slope.
- 70.90 Rugged draw, drains S.70°W.; asc. 30 ft.
- 74.80 Rocky spur, slopes SW. about 1 ch. dist.; desc. 25 ft.
- 76.80 Draw, drains S.; asc. 25 ft., along general S. slope to
- 80.08 The cor. of secs. 29, 30, 31, and 32.
- Land, gently rolling and rolling top of bench, draining NW., E. 52.20 chs.; rolling, rough, and broken bad lands, draining SW., W. 27.98 chs.; yellow and light colored sandstone, shale, and gypsum formation.
- Soil, red sand or red sandy loam, about 1 to 4 ft. deep, lying on a yellow, brown, or white chalky clay subsoil, 1st. to 3rd. rate, on E. 52.20 chs.; shallow red sand, red sandy clay, or alternate layers of varied colored clays, sandstone, shale, and gypsum, 4th. rate, on W. 27.98 chs.
- Timber, cedar.
- Undergrowth, shadscale, cotton brush, black sagebrush, salt brush, white sagebrush, and greasewood; medium dense to dense on top of bench, scattering on bad lands; fair growth of gramma grass on top of bench.
- Fall and winter grazing land, fair to good on top of bench, poor to fair on bad lands.
-
- West, on a random line bet. secs. 30 and 31.
- 40.00 Set temp. $\frac{1}{4}$ sec. cor.
- 92.72 Intersect the W. bdy. of the Tp., 3 lks. S. of the cor. of secs. 25, 30, 31, and 36, hereinbefore described.
- Thence,
- S.89°59'E., on a true line bet. secs. 30 and 31.

. . . PORTION OF THE SUBDIVISION OF T. 6 S., R. 24 E.

Chains

Over rolling top of bench, through medium dense undergrowth; desc. gradual NE. slope 5 ft.

0.10 Wash, 5 lks. wide, 2 ft. deep, in the bottom of draw, from SE. about 4 chs. dist., drains NW.; asc. gradual general SW. slope 55 ft.

26.80 Enter a medium heavy growth of timber, bears NW. and SW.; undergrowth becomes more scattering.

32.80 Wagon road, bears N.60°W. and S.60°E., at the top of ascent, bearing N.60°W. and S.60°E.; desc. gradual NE. slope 15 ft. to

35.20 E. edge of bench, bears NW. and SE.; desc. 10 ft. to $\frac{1}{4}$ sec. cor., over rolling, rough, and broken bad lands.

42.72 On NE. slope, set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

S 30

$\frac{1}{4}$ S 31

1936

from which

A cedar, 4 ins. diam., bears N.30°45'E., 12 lks. dist., mkd. S 30 B T.

A cedar, 12 ins. diam., bears S.26°45'E., 89 lks. dist., mkd. B T.

The bearing tree in sec. 31 is too scrubby for full marking.

46.80 Wash, 8 lks. wide, 1 ft. deep, in the bottom of draw, 10 ft. below $\frac{1}{4}$ sec. cor., drains NW.; asc. 20 ft.

52.80 Top of ascent; bears NW. and SE.; desc. 55 ft.

56.70 Wash, 50 lks. wide, 5 ft. deep, in the bottom of draw, drains N.20°W.; asc. NW. slope 80 ft.

66.90 Spur, projects SW. about 8 chs. dist.; gradual descent of 5 ft.

74.70 Wash; 10 lks. wide, 1 ft. deep, in the bottom of draw, drains SW.; asc. 35 ft.

78.70 Spur, slopes S.20°W. approximately 6 chs. dist.; desc. 10 ft., along general S. slope to

82.72 The cor. of secs. 29, 30, 31, and 32:

Land, rolling top of bench, W. 35.20 chs.; rolling, rough, and broken bad lands, E. 47.52 chs.; light colored sandstone, shale, and gypsum formation; general drainage to the NW.

Soil, red sand, sandy loam; or red sandy clay, about 1 to 3 ft. deep, lying on a brown, yellow, or white chalky clay subsoil, or on bedrock, 2nd. to 4th. rate, on top of bench; alternate layers of red sand, varied colored clays, sandstone, shale, and gypsum, 4th. rate, on bad lands.

Timber, cedar.

... PORTION OF THE SUBDIVISION OF T. 8 S., R. 24 E.


Chains

Undergrowth, shadscale, cotton brush, black sagebrush, salt brush, white sagebrush, and greasewood, medium dense on top of bench, sparse to scattering on bad lands; fair growth of gramma grass on top of bench.
Fall and winter grazing land, Fair on top of bench, poor on bad lands.

N.0°04'W., on a true line bet. secs. 29 and 30.

Over rolling and broken bad lands, through a medium heavy growth of timber and scattering undergrowth; asc. gradual general S. slope 15 ft.

- 5.00 Spur, projects W. approximately 12 chs. dist., thence southwesterly; desc. gradually 35 ft., over N. slope.
- 17.00 Draw, drains W. about 2 chs. dist., thence N.60°W.; asc. gradual SW. slope 30 ft.
- 27.80 Top of ascent, bears N.60°W. and S.60°E.; an old wagon road, bears same as top of ascent; gradual descent of 30 ft., over NE. slope to
- 40.00 Set an iron post, 3 ft. long; 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.



from which

A cedar, 6 ins. diam., bears N.78°15'E., 37 lks. dist., mkd. $\frac{1}{4}$ S 29 B T.

A cedar, 6 ins. diam., bears N.8°30'W., 159 lks. dist., mkd. $\frac{1}{4}$ S 30 B T.

- 46.80 Draw, 20 ft. below $\frac{1}{4}$ sec. cor., drains NW.; gradual ascent of 15 ft., over SW. slope.
- 50.40 Wash, 20 lks. wide, 5 ft. deep, drains W.
- 53.40 Spur, off bench to the SE. about 20 chs. dist., projects N.25°W.; desc. NE. slope 20 ft.
- 63.00 Wash, 12 lks. wide, 4 ft. deep, in the bottom of draw, heads SE. about 8 chs. dist., drains N.15°W.; gradual ascent of 10 ft.
- 64.50 Spur, slopes W. about 1 ch. dist.; desc. gradually 15 ft. along general W. slope to
- 72.91 Intersect the S. bdy. of sec. 20, N:89°38'E. 3.65 chs. dist. from the cor. of secs. 19 and 20, hereinbefore described, and at the point of intersection, set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for closing cor. of secs. 29 and 30, with brass cap mkd.

S20
 S30 | S29
 T6S R24E
 CC
 1936

PORTION OF THE SUBDIVISION OF T. 6 S., R. 24 E.

Chains

from which

A cedar, 6 ins. diam., bears S.47°24'E., 146
lks. dist., mkd. T 6 S R 24 E S 29 C C B T.

A cedar, 6 ins. diam., bears S.15°25'W., 40½
lks. dist., mkd. B T.

The bearing tree in sec. 30 is too scrubby for full marking.

Land, rolling and broken bad lands, draining generally to the NW.; light colored sandstone, gypsum, and shale formation.

Soil, red sand, sandy loam, or red sandy clay, about 1 to 4 ft. deep, lying on a brown, yellow, or white chalky clay subsoil or on bedrock, 1st. to 4th. rate, on portions of mile; alternate layers of red sand, varied colored clays, sandstone, gypsum, and shale, 4th. rate, on other parts.

Timber, scattering to a medium heavy growth of cedar.

Undergrowth, scattering to a medium dense growth of shadscale, cotton brush, black sagebrush, salt brush, white sagebrush, and greasewood; sparse to a fair growth of gramma grass.

Poor to fair fall and winter grazing land.

GENERAL DESCRIPTION

All the land in this fractional township lies on a general north slope from Dead Man's Bench, which is located in Township 7 South, Range 24 East, and has an elevation above sea level of approximately five thousand to five thousand five hundred feet. Nearly every variety of land is found on all of the sections, from level, gently rolling, and rolling draws, hollows, swales, and benches to rolling, rough, and broken bad lands.

Light colored, yellow, red, and gray sandstone is the principal formation, appearing on the surface mostly as outcroppings, although gypsum, shale, quartzite, and basalt are found on some of the sections. Surface indications of gilsonite are shown in section 36, but no evidence of oil, coal, or mineral was seen in this fractional township.

The entire area drains to the north, northeast, and northwest into the sections on the north and west of this fractional township, thence northwesterly.

The soil is a red sand or sandy loam or red sandy clay, varying in depth from about six inches to three feet, on tops and slopes, to approximately three to thirty feet in the bottoms of draws, hollows, and swales, and lying on a brown, yellow, or white chalky clay subsoil, or on varied colored clays, or on sandstone, shale, or gypsum bedrock, first to fourth rate. Alternate layers of varied colored clays, sandstone, shale, and gypsum compose the greater portion of the bad lands.

Cedar is the only timber found on these newly surveyed sections, and it varies from a scattering to a heavy growth on nearly all of the tops and slopes of spurs, ridges, and benches. The undergrowth consists of black sagebrush, shadscale, cotton brush, salt brush, white sagebrush, and greasewood, being medium dense to dense in

GENERAL DESCRIPTION

nearly all the draws, hollows, and swales, and on the top of benches, but mostly scattering on the tops and slopes. Medium dense to dense gramma grass grows on the tops of benches, but only sparse to scattering on other portions.

There are no streams, springs, nor seeps of water in this fractional township, and the only water available is stored in two reservoirs, one in the NE. $\frac{1}{4}$ NE. $\frac{1}{4}$ of section 28, and the other in the NW. $\frac{1}{4}$ SW. $\frac{1}{4}$ of section 36. The water in these reservoirs in sections 28 and 36, cover areas of approximately one half acre and ten acres, respectively. The reservoirs are fed from flood water or from melting snow, and the water is only suitable for stock.

In many of the broad draws, hollows, and swales, and on the tops of benches, on nearly all of the sections, the soil is adapted for raising crops, but owing to the scarcity of water for irrigation, farming is impracticable.

The fractional township is only suitable for grazing, and the gramma grass and brush make the land a fair to a good fall and winter range for stock. Approximately three hundred head of cattle and ten thousand sheep graze on these sections and in the adjoining townships during the spring, fall, and winter months. The stock depend upon snow for water during the winter, but trail to the reservoirs mentioned above and to water holes and reservoirs in the adjacent townships, in the spring and fall.

A well traveled automobile and wagon road from U. S. Highway No. 40 to Watson, Utah, enters section 25, west about ten chains distant from the corner of sections 19, 24, 25, and 30, bears in a southwesterly direction, and crosses the south boundary of section 36, west approximately five chains distant from the quarter section corner of section 36. Two wagon roads from U. S. Highway No. 40 to Watson, Utah, cross this fractional township, one comes into section 25, east about fifteen chains distant from the quarter section corners between sections 24 and 25, takes a southwesterly course, and leaves the south boundary of section 35, near the quarter section corner of section 35. The other road passes just west of the corner of sections 20 and 21, bears generally to the south and leaves the south boundary of section 32 near the corner of sections 32 and 33. There are several sheep wagon roads, but no other improvements, except the two reservoirs previously described.

No settlers have located in this fractional township.

BOOK A-522

4-680
(Revised May 1934)

FIELD ASSISTANTS

| NAMES | CAPACITY |
|-------------------|---------------------|
| LeGrand Fowlke | Principal Assistant |
| James B. Ollerton | Chainman |
| Robert Sumner | " |
| Robert Miller | " |
| Ernest H. Layton | Flagman |
| T. Neil McCormick | " |
| George H. Schramm | Cornerman |
| Vernon Morgan | " |
| George Snook | " |
| Wayne M. Erickson | " |
| Clarence Palmer | Axman |
| Paul Shaw | " |
| Vaughn Wonnacott | " |
| Alton Vernon | " |
| Ted Tuttle | " |
| Ronald Ashby | " |
| | |
| | |
| | |
| | |

CERTIFICATE OF UNITED STATES SURVEYOR

We, J. C. Clark and Ervine F. Smith, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 1st. day of August, 1936, received from the district cadastral engineer for Utah, with assignment and supplemental assignment instructions dated November 18, 1936 and instructions dated September 26, 1936, we have surveyed the South Boundary and a portion of the West Boundary and a Dependent Resurvey and Survey of portions of the Subdivision, completing the Survey of Township 6 South Range 24 East of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by us and under our direction; and that said survey has been made in strict conformity with said instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in the specific manner described in the foregoing field notes. Salt Lake City, Utah. February 1, 1937.

J. C. Clark
U. S. Surveyor.
Ervine F. Smith
Transitman.

CERTIFICATE OF APPROVAL

OFFICE OF U.S. SUPERVISOR OF SURVEYS,
DENVER, COLORADO MAY 5 - 1937

The foregoing field notes of the survey of the South Boundary and a portion of the West Boundary and a Dependent Resurvey and Survey of portions of the Subdivision, completing the Survey of Township 6 South, Range 24 East executed by J. C. Clark and Ervine F. Smith under special instructions dated August 1, 1936 and assignment instructions dated Nov. 18, 1936 and supplemental instructions dated Sept. 26, 1936 and supplemental, having been critically examined, and the necessary corrections made prior to their certification by the engineer, the said field notes, and the survey therein described, are hereby approved.

[Signature]
U.S. Supervisor of Surveys.

CERTIFICATE OF TRANSCRIPT

I certify that the foregoing transcript of the field notes of the above described surveys in is a true copy of the original field notes on file in the public survey office.

U.S. Supervisor of Surveys.

Blank

Page

Blank

Page

4-678
(April 1933)

BOOK A-522

BOOK NO. "B"

FIELD NOTES

OF THE

SURVEY OF THE WEST BOUNDARY AND THE SUBDIVISION,

AND THE ESTABLISHMENT OF QUARTER SECTION CORNERS

BETWEEN CLOSING CORNERS ON NORTH BOUNDARY OF

TOWNSHIP 7 SOUTH, RANGE 24 EAST.

Of the Salt Lake Meridian,

In the State of Utah.

EXECUTED BY

J. C. CLARK, U. S. SURVLYOR

AND

DIRAN T. BROUN, JR., TRANSITMAN

Under special instructions dated August 1, 1936, which provided for the surveys included under Group No. 274, bearing the approval of the Commissioner of the General Land Office under date of September 16, 1936 and assignment instructions dated September 26, 1936. supplemental assignment instructions dated October 7, 1936.

Survey commenced October 1, 1936.

Survey completed November 17, 1936.

INDEX DIAGRAM.

Township No. 7 South, Range No. 24 East.

| | | | | | | |
|----|-------------------|-------------------|-------------------|-------------------|-------------------|---------------|
| 10 | 86 6 8 3 82 | 86 5 6 3 80 | 86 4 4 9 61 | 87 3 3 6 47 | 87 2 2 3 35 | 87 1 22 |
| 9 | 7 7 9 78 | 8 6 0 77 | 9 4 5 59 | 10 3 3 44 | 11 2 1 32 | 12 19 |
| 7 | 16 7 5 74 | 17 5 8 73 | 16 4 3 57 | 15 3 1 42 | 14 1 8 30 | 13 17 |
| 6 | 19 7 2 71 | 20 5 6 70 | 21 4 2 55 | 22 2 9 41 | 23 1 6 29 | 24 15 |
| 4 | 30 6 8 67 | 29 5 3 66 | 28 4 0 52 | 27 2 7 39 | 26 1 4 26 | 25 14 |
| 3 | 31 6 5 21 | 32 5 1 22 | 33 3 8 23 | 34 2 5 24 | 35 1 2 25 | 36 |

TOWNSHIP 7 SOUTH, RANGE 24 EAST

| | | | | | |
|----|----|----|----|----|----|
| 6 | 5 | 4 | 3 | 2 | 1 |
| 7 | 8 | 9 | 10 | 11 | 12 |
| 18 | 17 | 16 | 15 | 14 | 13 |
| 19 | 20 | 21 | 22 | 23 | 24 |
| 30 | 29 | 28 | 27 | 26 | 25 |
| 31 | 32 | 33 | 34 | 35 | 36 |

Lines ruled in black were surveyed by J. C. Clark, U. S. Surveyor.

Lines ruled in red were surveyed by Diran T. Broun, Jr., Transitman.

Survey commenced October 1, 1936, and executed by J. C. Clark, U. S. Surveyor and Diran T. Broun, Jr., Transitman with Young and Sons transit No. 8520 and W. and L. E. Gurley transit No. 262684, respectively. The instruments are equipped with Smith solar attachments and full vertical circles, the horizontal limbs being provided with two double verniers placed opposite to each other and reading to single minutes of arc, which is also the least count of the verniers of the latitude and declination arcs, and vertical circles.

The instruments were in good condition, and having been placed in satisfactory adjustment prior to beginning the survey, and tested and found free from appreciable error, were approved by the district cadastral engineer for district No. 6, in assignment instructions dated September 26, 1936 and October 7, 1936, conditional upon satisfactory field tests. I also examined all the instrumental adjustments and corrected all errors before commencing the survey of this township.

The directions of the lines were not determined by the solar transit method, for the greater part of this township is open, and only portions are covered with a scattering to a heavy growth of timber. Therefore, it was practicable to run transit lines; and all azimuth deter-

TOWNSHIP 7 SOUTH, RANGE 24 EAST

minations were accomplished by observations upon Polaris, the bearings computed from deflection angles, and the transit lines carried forward, taking the mean of direct and reversed sights at each instrument station. Polaris was observed at elongation for meridian at the corner of Tps. 7 & 8 S., Rs. 23 and 24 E. and at each of the section corners on the S. bdy. of the township; and during the progress of the survey, the bearings of the W. bdy. of the township and the subdivisional lines were frequently checked by day light observations upon Polaris at elongation.

The measurements were made with Lallie steel tapes, 5 chains in length, graduated every link for the first 100 links, and the balance at intervals of 10 links. The tapes were tested by comparison with a Lufkin standard and found correct. All measurements were made on the slope, and the vertical angle of each interval was ascertained by clinometers in good adjustment; and the horizontal equivalents are entered in the field note record.

The data furnished with the special instructions gives the approximate geographic position for the SE. corner of the Tp., as follows: latitude $40^{\circ}10'$ N., and longitude $109^{\circ}09'$ W.

The observed general average magnetic declination is $15^{\circ}40'$ east, which gives the magnetic bearing of the true meridian, N. $15^{\circ}40'$ W.

October 1, 1936, at the cor. of Tps. 7 & 8 S., Rs. 23 and 24 E., at 7h 2.9m p. m., 1. m. t., or 7h 19.6m p. m. by my watch which reads correct 105th. meridian time as determined by the Western Union telegraph office at Vernal, Utah, I observe Polaris at eastern elongation, making two sights each with the telescope in direct and reversed positions, and place a nail at the mean point, on a peg driven firmly in the ground 8 chains N.

October 2, after sunrise, I lay off the azimuth of Polaris $1^{\circ}21'30''$, and make a meridian mark on a second peg, 18.96 lks. (12.51 ft.) to the west of the mean point in the line determined by the observation; I verify the angle by a vernier reading of the instrument.

Prior to beginning the survey of each range of sections, the meridian established at each of the section corners on the S. bdy. of the township, was determined in the same manner as the meridian at the corner of Tps. 7 & 8 S., Rs. 23 and 24 E.; and the instruments were tested frequently and kept in adjustment during the progress of the survey of this township.

METHOD AND ORDER OF PROCEDURE

The north, south, and east boundaries have been previously surveyed and established.

From the corner of Tps. 7 & 8 S., Rs. 23 and 24 E., the west boundary is run north with quarter section and section corners established alternately at regular intervals of 40.00 chains, counting from the south, and at the point of intersection with the north boundary, a closing corner for T. 7 S., Rs. 23 and 24 E. is established, and the fractional measurement placed against the north exterior.

The survey of the subdivisional lines were run in the regular manner, from south to north and from east to west, and the fractional measurements were placed against the north and west boundaries of the township. Also, in the subdivision, closing corners are established against the

TOWNSHIP 7 SOUTH, RANGE 24 EAST

Chains

north exterior, and quarter section corners pertaining to T. 7 S., are set midway between the closing corners, except on the north boundary of section 6, where the quarter section corner of section 6 is established west 40.00 chains distant from the closing corner of sections 5 and 6.

The west boundary of section 1 and the east and west boundaries of sections 2, 3, 4, 5, and 6 exceed 85.00 chains in length; therefore, lot corners are established on these section lines at 80.00 chains, counting from the southwest corners of the respective sections.


WEST BOUNDARY OF T. 7 S., R. 24 E.

Commence at the cor. of Tps. 7 and 8 S., Rs. 23 and 24 E., which is an iron post, 3 ins. diam., extending 9 ins. above ground, firmly set, correctly marked, and witnessed on the S. by a mound of stone, 2 ft. base, 1 1/2 ft. high.

North, on a true line along the W. bdy. of T. 7 S., R. 24 E., bet. secs. 31 and 36.

Over rolling, rough, and broken land, through a medium heavy growth of timber and scattering undergrowth; desc. general N. slope 30 ft.

- 1.40 Rocky draw, from S.70°W., drains S.70°E.; abrupt ascent of 50 ft.
- 6.90 Spur, slopes S.70°E. approximately 10 chs. dist.; steep descent of 65 ft.
- 8.70 Draw, drains NE. about 5 chs. dist., thence southeasterly; asc. 205 ft. to
- 26.50 S. edge of bench, bears NW. and S.80°E.; asc. gradual S. slope 35 ft.; over gently rolling top.
- 38.20 Top of ascent, bears E. and W.; desc. gentle N. slope 10 ft. to
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/4 sec. cor., with brass cap mkd.



from which

A cedar, 8 ins. diam., bears S.89°00'E., 150 1/2 lks. dist., mkd. 1/4 S 31 B T.

A cedar, 15 ins. diam., bears N.45°30'W., 349 lks. dist., mkd. 1/4 S 36 B T.)

- 51.20 N. edge of bench, 15 ft. below 1/4 sec. cor., bears NW. and SE.; desc. 10 ft.
- 52.30 Draw, drains N.80°E.; asc. 25 ft.
- 58.50 Spur, projects N.80°E. approximately 40 chs. dist.; desc. 40 ft.

WEST BOUNDARY OF T. 7 S., R. 24 E.

Chains

- 66.90 Wash, 30 lks. wide, 12 ft. deep, in the bottom of draw, drains N.80°E. about 20 chs. dist., thence southeasterly; asc. 55 ft.
- 73.70 Spur, slopes SE. about 4 chs. dist.; desc. 25 ft.
- 74.50 Draw, drains SE.; asc. 25 ft. to
- 80.00 On a gentle SW. slope, set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 25, 30, 31, and 36, with brass cap mkd.

| | |
|------|------|
| T7S | |
| R23E | R24E |
| S25 | S30 |
| S36 | S31 |
| 1936 | |

from which

- A cedar, 6 ins. diam., bears N.73°15'E., 294 lks. dist., mkd. T 7 S R 24 E S 30 B T.
- A cedar, 4 ins. diam., bears S.51°30'E., 153 lks. dist., mkd. T 7 S R 24 E S 31 B T.
- A cedar, 5 ins. diam., bears S.62°30'W., 196 lks. dist., mkd. T 7 S R 23 E S 36 B T.
- A cedar, 6 ins. diam., bears N.81°30'W., 139 lks. dist., mkd. T 7 S R 23 E S 25 B T.

Land, rolling, rough, and broken bad lands, draining generally SE. into a main wash in hollow which drains southwesterly; light colored and yellow sandstone formation.

Soil, red sand and sandy loam, or red sandy clay, about 6 ins. to 3 ft. deep on tops and slopes and several ft. deep in bottoms, and lying on varied colored clay subsoils or on sandstone bedrock, 1st. to 4th. rate. Alternate layers of varied colored clays and sandstone on portions of mile, 4th. rate.

Timber, scattering to a medium growth of scrubby cedar.

Undergrowth, scattering to medium dense black sagebrush, cotton brush, and shadscale; a sparse growth of gramma and bunch grass.

Poor to fair fall and winter grazing land.

North, bet. secs. 25 and 30.


Asc. gentle SW. slope 10 ft., through scattering timber and dense undergrowth.

- 4.80 Top of ascent, bears N.70°E. and N.70°W.; gradual descent of 30 ft.
- 23.70 Draw, drains S.70°E.; asc. gradually 30 ft.
- 33.40 Spur, projects SE. about 10 chs. dist.; desc. 15 ft.
- 36.40 Wash, 30 lks. wide, 6 ft. deep, in the bottom of draw, drains SE.; asc. SW. slope 30 ft. to

WEST BOUNDARY OF T. 7 S., R. 24 E.

Chains

40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.



from which

A cedar, 3 ins. diam., bears N.60°45'E., 228 lks. dist., mkd. B T.

A cedar, 4 ins. diam., bears N.27°30'W., 87 lks. dist., mkd. $\frac{1}{4}$ S 25 B T.

43.90 Spur, 10 ft. above $\frac{1}{4}$ sec. cor., projects S.70°E. approximately 30 chs. dist.; gradual descent of 5 ft.

47.30 Wash, 40 lks. wide, 10 ft. deep, in the bottom of draw, drains SE.; asc. gradual SW. slope 45 ft.


53.30 Enter a medium heavy growth of timber, bears NW. and SE.

63.00 Wash, 25 lks. wide, 3 ft. deep, drains SE.

66.10 Spur, from S.70°W., projects S.70°E. about 40 chs. dist.; desc. gentle N. slope 25 ft., through scattering timber, bearing same as spur.

77.00 Wash, 12 lks. wide, 3 ft. deep, in the bottom of swale, heads S.70°W. about 15 chs. dist., drains N.80°E.; gradual ascent of 5 ft. to

80.00 At the top of ascent on gentle SE. slope, set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for the cor. of secs. 19, 24, 25, and 30, with brass cap marked



from which

A cedar, 10 ins. diam., bears N.14°15'E., 317 lks. dist., mkd. T 7 S R 24 E S 19 B T.

A cedar, 8 ins. diam., bears N.10°30'W., 490 lks. dist., mkd. T 7 S R 23 E S 24 B T.

There are no suitable bearing trees available in secs. 25 and 30; therefore, I raise a mound of stone, 5 ft. base, 4 ft. high, W. of cor.

Land, rolling and broken bad lands, draining easterly and southeasterly into a main wash in hollow, thence southwesterly; light colored and yellow sandstone formation.

Soil, red sand and sandy loam, or red sandy clay, about 6 ins. to 3 ft. deep on tops and slopes and several ft. deep in bottoms, and lying on varied colored clay subsoils or on sandstone bedrock, 1st. to 4th. rate. Alternate layers of varied colored clays and sandstone on portions of mile, 4th. rate.

Timber, cedar.

Undergrowth, scattering to dense black sagebrush, cotton

WEST BOUNDARY OF T. 7 S., R. 24 E.

Chains


brush, and shadscale; scattering and patches of gramma grass.

Poor to fair fall and winter grazing land.

North, bet. secs. 19 and 24.

Desc. gradual NE. slope 5 ft., through scattering timber and dense undergrowth.

- 3.20 Wash, 30 lks. wide, 3 ft. deep, in the bottom of draw, drains SE.; asc. gentle S. slope 30 ft.
- 9.60 A sheep wagon road, bears N.80°E. about 1 ch. dist., then forks N.80°E. and SE., and N.80°W. approximately 5 chs. dist., thence southwesterly.
- 14.40 Spur, projects S.80°E. about 12 chs. dist.; gradual descent of 20 ft.
- 22.50 Wash, 15 lks. wide, 3 ft. deep, in the bottom of draw, drains S.80°E.; asc. gradual S. slope 20 ft.
- 28.10 Spur, projects E. approximately 15 chs. dist.; desc. 10 ft.
- 32.90 Wash, 20 lks. wide, 4 ft. deep, drains E.
- 35.20 Wash, 40 lks. wide, 8 ft. deep, in the bottom of draw, drains SE.; asc. gradual SW. slope 15 ft. to
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/4 sec. cor., with brass cap mkd.



from which

A cedar, 6 ins. diam., bears N.83°06'E., 180 1/2 lks. dist., mkd. 1/4 S 19 B T.

A cedar, 8 ins. diam., bears N.54°05'W., 152 lks. dist., mkd. 1/4 S 24 B T.

- 43.20 Wash, 30 lks. wide, 6 ft. deep, drains SE.
- 53.40 Spur, 50 ft. above 1/4 sec. cor., projects S.70°E. about 10 chs. dist.; desc. gradual N. slope 5 ft.
- 55.10 An old sheep wagon road, bears NW. and SE.
- 58.20 Draw, drains E.; gradual ascent of 5 ft.
- 61.20 Spur, slopes E. about 2 chs. dist.; gradual descent of 5 ft.
- 62.50 Wash, 30 lks. wide, 3 ft. deep, in the bottom of draw, drains SE.; asc. 15 ft.
- 65.10 Spur, projects S.70°E. approximately 20 chs. dist.; desc. 25 ft.
- 73.40 Draw, drains SE.; asc. general SW. slope 50 ft. to

WEST BOUNDARY OF T. 7 S., R. 24 E.

Chains

80.00

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 13, 18, 19, and 24, with brass cap mkd.

| | |
|------|------|
| T7S | |
| R23E | R24E |
| S13 | S18 |
| S24 | S19 |
| 1936 | |

from which

A cedar, 5 ins. diam., bears N.41°45'E., 166 lks. dist., mkd. B T.

A cedar, 5 ins. diam., bears S.9°45'E., 107 lks. dist., mkd. B T.

A cedar, 7 ins. diam., bears S.37°30'W., 88 lks. dist., mkd. T 7 S R 23 E S 24 B T.

A cedar limb, 7 ins. diam., bears N.26°45'W., 217 lks. dist., mkd. T 7 S R 23 E S 13 B T.

The bearing trees in secs. 18 and 19 are too scrubby to permit the full marking.

Land, rolling and broken bad lands, draining easterly and southeasterly into a main wash in hollow, thence southwesterly; light colored and yellow sandstone formation.

Soil, red sand and sandy loam, or red sandy clay, varying in depth from 6 ins. to 3 ft. on tops and slopes and several ft. in bottoms, and lying on varied colored clay subsoils or on sandstone bedrock, 1st. to 4th. rate. Alternate layers of varied colored clays and sandstone on portions of mile, 4th. rate.

Timber, scattering to a medium heavy growth of cedar.

Undergrowth, scattering to dense black sagebrush, cotton brush, and shadscale; scattering and patches of gramma grass.

Poor to fair fall and winter grazing land.

North; bet. secs. 13 and 18:

Asc. gradual general SW; slope 25 ft.; through medium heavy timber and scattering undergrowth:

13.70 Spur, projects SE.; desc: 10 ft.

16.40 Draw, drains SE.; asc. 35 ft.

21.00 Spur; projects SE. approximately 12 chs: dist.; desc. 20 ft.

24.30 Wash, 10 lks. wide, 2 ft. deep, in the bottom of draw, drains SE.; asc. 35 ft.

30.20 Spur, projects S.80°E. about 15 chs. dist.; desc. 10 ft.


31.90 Draw; drains S.80°E.; gradual ascent of 15 ft.

38.30 Spur, projects N.80°E. approximately 20 chs. dist.; desc. gentle N. slope 10 ft. to

WEST BOUNDARY OF T. 7 S., R. 24 E.

Chains

40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.



from which

A cedar, 7 ins. diam., bears S.28°15'E., 108 lks. dist., mkd. $\frac{1}{4}$ S 18 B T.

A cedar, 8 ins. diam., bears N.86°00'W., 147 lks. dist., mkd. $\frac{1}{4}$ S 13 B T.

43.10 Draw, 10 ft. below $\frac{1}{4}$ sec. cor., drains E.; asc. gradual S. slope 5 ft.

45.80 Wagon road, bears N.70°E. to Dead Man's Bench, thence to U. S. Highway No. 40, and W. to Watson, Utah.

49.60 Spur, projects E. about 10 chs. dist.; gradual descent of 15 ft.


52.10 Draw, drains S.30°E.; asc. gradually 25 ft.

56.70 Spur, projects S.80°E. approximately 15 chs. dist.; gradual descent of 10 ft.

60.20 Wash, 50 lks. wide, 10 ft. deep, in the bottom of draw, drains S.70°E.; asc. general S. slope 55 ft.

79.50 Ridge, bears N.80°E. and S.80°W.; desc. gentle NW. slope 5 ft. to

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 7, 12, 13, and 18, with brass cap mkd.



from which

A cedar, 8 ins. diam., bears N.66°30'E., 20 lks. dist., mkd. T 7 S R 24 E S 7 B T.

A cedar, 5 ins. diam., bears S.61°45'E., 92 lks. dist., mkd. B T.

A cedar, 6 ins. diam., bears S.83°00'W., 48 lks. dist., mkd. T 7 S R 23 E S 13 B T.

A cedar, 8 ins. diam., bears N.28°45'W., 221 lks. dist., mkd. T 7 S R 23 E S 12 B T.

The bearing tree in sec. 18 is too scrubby to permit the full marking.

Land, rolling and broken; with outcroppings of light colored and yellow sandstone formation; drainage SE. into a main wash in hollow, thence generally to the S. through the W. range of secs., S. 79.50 chs.; N. 0.50 chs. drain NE.

Soil, red sand and sandy loam, or red sandy clay, varying

WEST BOUNDARY OF T. 7 S., R. 24 E.

Chains

In depth from about 6 ins. to 3 ft. on tops and slopes and several ft. in bottoms, and lying on varied colored clay subsoils or on sandstone bedrock, 1st. to 4th. rate. Alternate layers of varied colored clays and sandstone on portions of mile, 4th. rate.

Timber, scattering to a medium heavy growth of cedar.


Undergrowth, scattering to medium dense black sagebrush, cotton brush, and shadscale; scattering and patches of gramma grass.

Poor to fair fall and winter grazing land.

North, bet. secs. 7 and 12.

Over rolling, rough, and broken bad lands, through scattering timber and undergrowth; desc. abrupt general NE. slope 120 ft.

- 13.80 Draw, heads SE. about 8 chs. dist., drains NW. approximately 6 chs. dist., thence northeasterly; gradual ascent of 10 ft.
- 17.00 Spur, slopes NW. about 5 chs. dist.; desc. 120 ft.
- 25.20 Same draw as noted at 13.80 chs., drains NE.; asc. 50 ft.
- 32.60 Spur, projects N.25°E. approximately 30 chs. dist.; desc. NW. slope 65 ft. to
- 39.70 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for witness $\frac{1}{4}$ sec. cor., with brass cap mkd.



from which

A cedar, 8 ins. diam., bears S.5°45'E., 118 lks. dist., mkd. W C B T.

A cedar, 6 ins. diam., bears N.19°15'W., 94 lks. dist., mkd. W C $\frac{1}{4}$ S 12 E T. /

The bearing tree in sec. 7 is too scrubby to permit the full marking.

From this cor. desc. 10 ft. to


- 40.00 True point for $\frac{1}{4}$ sec. cor. falls in the bottom of a wash, 10 lks. wide, 2 ft. deep, draining NW., where the establishment of a cor. monument is impracticable.
- 43.80 Draw, 15 ft. below the true point for $\frac{1}{4}$ sec. cor., drains NE.; asc. 40 ft.
- 50.30 Spur, projects northeasterly about 30 chs. dist.; desc. abruptly 105 ft.
- 57.10 Draw, drains N.30°E.; asc. 95 ft.
- 69.50 Spur, projects N.10°E.; steep descent of 130 ft., over NW. slope to

WEST BOUNDARY OF T. 7 S., R. 24 E.

Chains

80.00

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 1, 6, 7, and 12, with brass cap mkd.



from which

A cedar limb, 3 ins. diam., bears S.12°00'E., 40 lks. dist., mkd. B T.

A cedar, 3 ins. diam., bears S.84°30'W., 72 lks. dist., mkd. B T.

A cedar limb, 3 ins. diam., bears N.70°00'W., 70 lks. dist., mkd. B T.

There is no suitable bearing tree available in sec. 6; therefore, I raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Land, rolling, rough, and broken bad lands, draining NE. about 20 chs. dist., thence generally to the N.; outcroppings of light colored and yellow sandstone formation.

Soil, red sandy clay about 6 ins. to 4 ft. deep, lying on varied colored clay subsoils or on sandstone bedrock, 4th. rate. Alternate layers of varied colored clays and sandstone on portions of mile, 4th. rate.

Timber, cedar.

Undergrowth, black sagebrush, shadscale, and cotton brush; a sparse growth of gramma grass.

Poor to fair winter grazing land.

North, on a true line bet. secs. 1 and 6.

Over rolling, rough, and broken bad lands, through scattering timber and undergrowth; desc. NW. slope 30 ft.

3.00 Draw, heads E. about 4 chs. dist., drains W. approximately 1 ch. dist., thence northwesterly; asc. abrupt S. slope 45 ft.

7.90 Spur, slopes W. about 6 chs. dist.; desc. 65 ft., along general NW. slope.

14.10 Wash, 50 lks. wide, 8 ft. deep, in the bottom of draw, from S.10°W., drains N.; line follows nearly level bottom to

18.80 Leave wash, drains N.20°E.; begin gradual ascent of 65 ft. over general SE. slope.

32.80 Spur, from S.10°W., projects N.; over nearly level top to


39.60 Leave top of spur, projects N.15°W. about 4 chs. dist., thence northeasterly; desc. NE. slope 10 ft. to

40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the

WEST BOUNDARY OF T. 7 S., R. 24 E.

Chains

ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.




from which

A cedar, 4 ins. diam., bears N.84°00'E., 43 $\frac{1}{2}$ lks. dist., mkd. $\frac{1}{4}$ S 6 B T.

A cedar limb, 4 ins. diam., bears N.9°30'W., 121 lks. dist., mkd. $\frac{1}{4}$ S 1 E T.

- 44.60 Head of draw, 30 ft. below $\frac{1}{4}$ sec. cor., drains NE.; asc. gradual SE. slope 10 ft.
- 49.20 Spur, projects N.15°E. approximately 20 chs. dist.; desc. 45 ft.
- 55.80 Wash, 60 lks. wide, 15 ft. deep, in the bottom of draw, drains NE.; asc. S. slope 35 ft.
- 61.00 Spur, slopes E. about 4 chs. dist.; desc. 45 ft.
- 62.70 Draw, heads S.70°W. approximately 6 chs. dist., drains E.; asc. SE. slope 50 ft.
- 64.60 Spur, projects N.30°E. about 20 chs. dist.; desc. 40 ft.
- 70.20 Draw, heads S.15°E. approximately 6 chs. dist., drains N.15°E.; asc. 35 ft.
- 73.20 Spur, projects N.20°E. about 30 chs. dist.; desc. 90 ft.
- 75.60 Draw, heads W. about 3 chs. dist., drains N.20°E.; asc. SE. slope 70 ft. to
- 80.00 Set an iron post, 3 ft. long, 1 in. diam., over a cross (X) chiseled into surface rock, and in a mound of stone, 5 ft. base, 2 $\frac{3}{4}$ ft. high, for cor. of lots 8 and 9, sec. 1, and lots 5 and 12, sec. 6, with brass cap mkd.



1936

There are no trees within a reasonable distance suitable for marking.

- 84.00 Spur, 5 ft. above lot cor., projects N.60°E. approximately 15 chs. dist.; desc. abruptly 50 ft. to
- 88.70 Base of steep descent, bears NE. and SW.; leave timber; desc. gradually 30 ft., over nearly level and gently rolling land.
- 103.40 Wash, 15 lks. wide, 5 ft. deep, in the bottom of draw, drains E. about 2 chs. dist. into a main wash, thence northerly; gradual ascent of 10 ft., over nearly level and gently rolling land to
- 110.18 Intersect the S. bdy. of sec. 31, T. 6 S., R. 24 E., east 14.03 chs. dist. from the cor. of Tps. 6 S., Rs. 23 and 24 E., which is an iron post, 3 ins. diam., extending 9

WEST BOUNDARY OF T. 7 S., R. 24 E.

Chains

ins. above ground, firmly set, marked, and witnessed as described in the official record of the survey of T. 6 S. R. 24 E.; and at the point of intersection, set an iron post, 3 ft. long, 3 ins. diam., 27 ins. in the ground, for closing cor. of Tps. 7 S., Rs. 23 and 24 E., with brass cap mkd.

T6SR24E
 S31
 S1 | S6
 R23E | R24E
 T7S
 CQ
 1936

of stone, 3 ft. base, 2 ft. high, S. of cor. raise a mound

Land, rolling, rough, and broken bad lands, draining NE. into a main wash in hollow in sec. 6, thence northwesterly; outcroppings of light colored and yellow sandstone formation.

Soil, red sandy clay about 6 ins. to 4 ft. deep, lying on varied colored clay subsoils or on sandstone bedrock, 4th. rate. Alternate layers of varied colored clays and sandstone on portions of mile, 4th. rate.

Timber, scattering to medium heavy growth of cedar.

Undergrowth, black sagebrush, shadscale, and cotton brush; a sparse growth of gramma grass.

Poor to fair winter grazing land.

SUBDIVISION OF T. 7 S., R. 24 E.

Commence the subdivisional survey at the cor. of secs. 1, 2, 35, and 36, on the S. bdy. of the Tp., which is an iron post, 2 ins. diam., extending 12 ins. above ground, firmly set, marked, and witnessed as described in the official record of the survey of T. 8 S., R. 24 E.


N.0°01'W., bet. secs. 35 and 36.

Over rolling top of bench, through dense undergrowth; desc. gentle NW. slope 5 ft.

- 4.80 Draw, drains SW.; gradual ascent of 50 ft.
- 28.80 Top of ascent, bears NE. and SW.; desc. gradually 5 ft.
- 31.20 Sheep wagon road, bears E. about 1 ch. dist., thence northeasterly, and W. approximately 1 ch. dist., thence southwesterly.
- 33.00 Leave top of bench, bears N.60°E. and S.60°W., enter rolling, rough, and broken bad lands; desc. NW. slope 25 ft.
- 33.60 Enter a scattering growth of timber; undergrowth becomes scattering; bearing NE. and SW.
- 36.30 Draw, drains S.70°W.; asc. SE. slope 15 ft. to
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/2 sec. cor., with brass cap mkd.

..SUBDIVISION OF T. 7 S., R. 24 E.

Chains




from which

A cedar limb, 6 ins. diam., bears N.12°30'E., 84½ lks. dist., mkd. ¼ S 36 B T.

A cedar, 10 ins. diam., bears N.44°15'W., 63 lks. dist., mkd. ¼ S 35 B T.

- 42.20 Spur, 5 ft. above ¼ sec. cor., projects S.70°W. about 15 chs. dist.; desc. 15 ft.
- 53.30 Draw, heads E. approximately 12 chs. dist., drains SW.; asc. 30 ft.
- 59.40 Spur, projects SW.; gradual descent of 5 ft..
- 67.50 Draw, drains SW.; asc. gradual SW. slope 5 ft. to
- 71.40 Leave rolling, rough, and broken bad lands, bears NW. and SE., enter bench; leave timber; asc. gradual general S. slope 30 ft., over gently rolling top.
- 71.50 Wagon road, bears N.75°W. to U. S. Highway No. 40 and S.75°E. to Watson, Utah.
- 71.60 Enter dense undergrowth, bears NW. and SE.
- 78.60 Top of ascent, bears E. and W.; desc. gentle N. slope 5 ft. to
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, with a white sandstone, 7x5x1½ ins., mkd. X, deposited at the base, for cor. of secs. 25, 26, 35, and 36, with brass cap mkd.



There are no other suitable accessories available.

Land, rolling and gently rolling top of bench, S. 33.00 chs. and N. 8.60 chs.; rolling, rough, and broken bad lands, remainder of mile; outcroppings of yellow and light colored sandstone formation; general drainage SW.

Soil, red sand and red sandy loam, about 1 to 3 ft. deep, lying on a brown, yellow, or on a white chalky clay subsoil, 1st. to 3rd. rate, on bench; red sand and red sandy clay, about 6 ins. to 3 ft. deep, lying on varied colored clay subsoils or on bedrock, 3rd. and 4th. rate, on bad lands.

Timber, cedar.

Undergrowth, black sagebrush and shadscale; scattering growth of gamma grass.

Fair fall and winter grazing land on bench, poor on bad lands.

SUBDIVISION OF T. 7 S., R. 24 E.

Chains

S.89°58'E., on a random line bet. secs. 25 and 36.

40.00 Set temp. 1/4 sec. cor.

80.04 Intersect the E. bdy. of the Tp., 19 lks. S. of the cor. of secs. 25, 30, 31, and 36, which is an iron post, 2 ins. diam., extending 9 ins. above ground, firmly set, marked, and witnessed as described in the official record of the survey of T. 7 S., R. 25 E.

Thence,

S.89°54'W., on a true line bet. secs. 25 and 36.

Over gently rolling top of bench, through dense undergrowth; asc. gradual SE. slope 5 ft.

11.20 Top of ascent, bears NE. and SW.; gradual descent of 35 ft., over NW. slope to

40.02 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with a sandstone, 7x4x2 ins., mkd. X, deposited at the base, for 1/4 sec. cor., with brass cap mkd.

S25

1/4

S36

1936

There are no other suitable accessories available.

From this cor., continue gradual descent of 45 ft., over NW. slope.

50.00 Wagon road, bears N.46°15'E. about 2 chs. dist., thence northeasterly to Watson, Utah, and S.45°30'W. approximately 3 chs. dist., thence southwesterly to U. S. Highway No. 40.

58.70 Wash, 20 lks. wide, 7 ft. deep, in the bottom of draw, drains S.60°W.; asc. gradual general SE. slope 25 ft. to

80.04 The cor. of secs. 25, 26, 35, and 36.

Land, rolling and gently rolling top of bench, draining generally to the SW.; yellow and light colored sandstone formation.

Soil, red sand and red sandy loam, varying in depth from about 2 to 3 ft. on tops and slopes and to about 6 ft. in bottoms, and lying on yellow sand, or on a brown, yellow, or white chalky clay subsoil, or on bedrock, 1st. and 2nd. rate.

No timber.

Undergrowth, dense black sagebrush and scattering shadscale; a sparse growth of gramma grass.

Fair fall and winter grazing land.

N.0°01'W., bet. secs. 25 and 26.


Over gently rolling top of bench, through dense undergrowth; desc. gradual general NW. slope 10 ft.

SUBDIVISION OF T. 7 S., R. 24 E.

Chains

32.10 Wash, 15 lks. wide, 1 ft. deep, in the bottom of swale, drains S.70°W.; asc. gradual SE. slope 20 ft. to

40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with a sandstone, 4x4x1 ins., mkd. X, deposited at the base, for $\frac{1}{4}$ sec. cor., with brass cap mkd.




There are no other suitable accessories available.

44.80 Top of ascent, 10 ft. above $\frac{1}{4}$ sec. cor., bears N.70°E. and S.70°W.; gradual descent of 5 ft., over NW. slope.

68.80 Wash, 60 lks. wide, 6 ft. deep, in the bottom of hollow, drains SW.; asc. gentle SE. slope 25 ft. to

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, with a white sandstone, 5x4x1 ins., mkd. X, deposited at the base, for cor. of secs. 23, 24, 25, and 26, with brass cap mkd.



There are no other suitable accessories available.

Land, rolling and gently rolling top of bench, draining to the SW.; yellow and light colored sandstone formation.

Soil, red sand and red sandy loam, varying in depth from about $1\frac{1}{2}$ to 3 ft. on tops and slopes and to about 6 ft. in bottoms, and lying on yellow sand, or on a brown, yellow, or white chalky clay subsoil, or on bedrock, 1st. and 2nd. rate.

No timber.

Undergrowth, dense black sagebrush and scattering shadscale; a sparse growth of gramma grass.

Fair fall and winter grazing land.

N.89°54'E., on a random line bet. secs. 24 and 25.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.12 Intersect the E. bdy. of the Tp., at the cor. of secs. 19, 24, 25, and 30, which is an iron post, 2 ins. diam., extending 9 ins. above ground, firmly set, marked, and witnessed as described in the official record of the survey of T. 7 S., R. 25 E.

Thence,

S.89°54'W., on a true line bet. secs. 24 and 25.

Over gently rolling top of bench, through dense undergrowth; desc. gradual general W. slope 75 ft. to $\frac{1}{4}$ sec. cor.

SUBDIVISION OF T. 7 S., R. 24 E.

| | |
|--------|--|
| Chains | |
| 25.00 | At this point, line descends along the S. side and near the bottom of a draw, draining from the NE. to W. |
| 40.06 | <p>Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with a sandstone, 4x3x1 ins., mkd. X, deposited at the base, for $\frac{1}{4}$ sec. cor., with brass cap mkd.</p> <div style="text-align: center;"> $\frac{1}{4} \frac{S24}{S25}$ 1936 </div> |
| | <p>There are no other suitable accessories available.</p> <p>This cor. stands at the base of descent, bearing NW. and SE.; leave draw, drains NW.; begin gradual ascent of 5 ft. over NE. slope.</p> |
| 46.50 | Spur, slopes NW. about 4 chs. dist.; desc. gradual SW. slope 50 ft. |
| 72.40 | Wash, 20 lks. wide, 6 ft. deep, in the bottom of hollow, drains SW.; asc. gentle SE. slope 15 ft. to |
| 80.12 | <p>The cor. of secs. 23, 24, 25, and 26.</p> <p>Land, rolling and gently rolling top of bench, draining generally to the SW.; yellow and light colored sandstone formation.</p> <p>Soil, red sand and red sandy loam, varying in depth from about 2 to 3 ft. on tops and slopes and to about 6 ft. in bottoms, and lying on yellow sand, or on a brown, yellow, or white chalky clay subsoil, or on bedrock, 1st. and 2nd. rate.</p> <p>No timber.</p> <p>Undergrowth, dense black sagebrush and scattering shade-scale; sparse to medium dense growth of gramma grass.</p> <p>Fair fall and winter grazing land.</p> |
| 40.00 | <p>N.0°01'W., bet. secs. 23 and 24.</p> <p>Asc. gradually 80 ft. to $\frac{1}{4}$ sec. cor., over gently rolling top of bench, through dense undergrowth.</p> <p>On a gentle SE. slope, set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with a sandstone, 4x4x1 ins., mkd. X, deposited at the base, for $\frac{1}{4}$ sec. cor., with brass cap mkd.</p> <div style="text-align: center;"> $\frac{1}{4} \frac{S23}{S24}$ 1936 </div> <p>There are no other suitable accessories available.</p> <p>41.00 Top of ascent, 5 ft. above $\frac{1}{4}$ sec. cor., bears NE. and SW.; gradual descent of 15 ft., over NW. slope.</p> <p>71.70 Draw, drains SW.; asc. gradual SE. slope 15 ft. to</p> |

.. SUBDIVISION OF T. 7 S., R. 24 E.

Chains

80.00

At the top of ascent, bearing NE. and SW., set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, with a sandstone, 2½x2x1 ins., mkd. X, deposited at the base, for cor. of secs. 13, 14, 23, and 24, with brass cap mkd.

T7S | R24E
 S14 | S13 ✓
 S23 | S24
 1936

There are no other suitable accessories available.

Land, rolling and gently rolling top of bench, draining to the SW.; yellow and light colored sandstone formation.

Soil, red sand and red sandy loam, varying in depth from about 1½ to 3 ft. on tops and slopes and to about 6 ft. in bottoms, and lying on yellow sand, or on a brown, yellow, or white chalky clay subsoil, or on bedrock, 1st. and 2nd. rate.

No timber.

Undergrowth, dense black sagebrush and scattering shade-scale; sparse to medium dense growth of gramma grass.

Fair fall and winter grazing land.

N.89°54'E., on a random line bet. secs. 13 and 24.

40.00 Set temp. ¼ sec. cor.

80.28 Intersect the E. bdy. of the Tp., 9 lks. S. of the cor. of secs. 13, 18, 19, and 24, which is an iron post, 2 ins. diam., extending 9 ins. above ground, firmly set, marked, and witnessed as described in the official record of the survey of T. 7 S., R. 25 E.

Thence,

S.89°50'W., on a true line bet. secs. 13 and 24.

Desc. gradual general SW. slope 55 ft., over gently rolling top of bench, through dense undergrowth.

29.50 Hollow, drains S.15°E. about 10 chs. dist., thence S.15°W.; asc. gentle SE. slope 10 ft. to

40.14 On the top of ascent, bearing N.15°E. and S.15°W., set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with a sandstone, 5x4x1 ins., mkd. X, deposited at the base, for ¼ sec. cor., with brass cap mkd.

S13
 ¼
 S24
 1936

There are no other suitable accessories available.

From this cor., desc. gradually 50 ft. to sec. cor., across the head of draw.

59.00 Wagon road, bears N.48°05'W. about 2 chs. dist., thence

SUBDIVISION OF T. 7 S., R. 24 E.

Chains

northwesterly to U. S. Highway No. 40, and S. 43° 04' E. about 3 chs. dist., thence southeasterly to Watson, Utah.

68.00 Head of draw, drains SW.

80.28 The cor. of secs. 13, 14, 23, and 24.

Land, rolling and gently rolling top of bench, draining generally to the SW.; yellow and light colored sandstone formation.

Soil, red sand and red sandy loam, varying in depth from about 1 1/2 to 2 1/2 ft. on tops and slopes and to about 6 ft. or more in bottoms, and lying on yellow sand, or on a brown, yellow, or white sandy clay subsoil or on bedrock, 1st. and 2nd. rate.

No timber.

Undergrowth, dense black sagebrush and scattering shadscale; sparse to medium dense growth of gramma grass.

Fair fall and winter grazing land.

N. 0° 01' W., bet. secs. 13 and 14.

Over gently rolling top of bench, through dense undergrowth; desc. gradual NW. slope 10 ft.

3.30 Draw, drains SW.; gradual ascent of 40 ft.

24.00 Top of ascent, bears E. and W.; desc. gentle N. slope 10 ft. to N. edge of bench.

25.00 Wagon road, bears N. 46° 45' W. to U. S. Highway No. 40 and S. 55° 30' E. about 1 ch. dist., thence southeasterly to Watson, Utah.


26.20 Branch of the same road as noted at 25.00 chs., bears N. 81° 45' W. about 1.50 chs. dist. to junction of the roads, thence northwesterly, and S. 73° 45' E.

27.40 Branch of the same road as noted at 26.20 chs., bears N. 76° 30' W. and S. 76° 30' E.

33.60 Leave top of bench, bears S. 70° E. about 10 chs. dist., thence easterly, and W. approximately 15 chs. dist., thence northwesterly, enter rolling, rough, and broken bad lands; desc. gradually 20 ft. to 1/4 sec. cor., over general NE. slope.

33.80 Enter a medium heavy growth of timber, bears E. and W.; undergrowth becomes scattering.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/4 sec. cor., with brass cap mkd.



from which

A cedar limb, 6 ins. diam., bears S. 56° 45' E., 144 lks. dist., mkd. 1/4 S 13 B T.

SUBDIVISION OF T. 7 S., R. 24 E.

Chains

A cedar, 10 ins. diam., bears S.75°45'W., 94 lks. dist., mkd. $\frac{1}{4}$ S 14 B T.

- 41.00 Draw, 25 ft. below $\frac{1}{4}$ sec. cor.; drains NE.; asc. 35 ft.
- 47.60 Spur, slopes NE. about 10 chs. dist.; desc. 40 ft.
- 59.10 Draw, drains N.60°E. approximately 15 chs. dist. into a main draw, thence N.; gradual ascent of 15 ft.
- 74.50 Spur, projects NE.; desc. NW. slope 35 ft. to
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 11, 12, 13, and 14, with brass cap mkd.

| | |
|------|------|
| T7S | R24E |
| S11 | S12 |
| S14 | S13 |
| 1936 | |

from which

- A cedar limb, 6 ins. diam., bears N.70°15'E., 47 lks. dist., mkd. T 7 S R 24 E S 12 B T.
- A cedar, 15 ins. diam., bears S.47°45'E., 117 lks. dist., mkd. T 7 S R 24 E S 13 B T.
- A cedar, 7 ins. diam., bears S.29°30'W., 177 lks. dist., mkd. T 7 S R 24 E S 14 B T.
- A cedar limb, 8 ins. diam., bears N.57°45'W., 23 lks. dist., mkd. T 7 S R 24 E S 11 B T.

This cor. is located in the bottom of a shallow draw, draining NE.

Land, rolling and gently rolling top of bench, draining generally to the SW., S. 33.60 chs.; rolling, rough, and broken bad lands, draining NE., N. 46.40 chs.; outcroppings and surface rock of red, yellow, and light colored sandstone formation.

Soil, red sand and red sandy loam, about 1 to 6 ft. deep, lying on yellow sand, or on a brown, yellow, or white sandy clay subsoil or on bedrock, 1st. and 2nd. rate, on bench; red sand, sandy loam, and red sandy clay, shallow or sandstone exposed on tops and slopes, and about 6 ins. to 2 ft. deep in bottoms, lying on bedrock, 1st. to 4th. rate, on bad lands.

Timber, cedar.

Undergrowth, black sagebrush and shadscale; gramma grass, scattering to medium dense on bench, sparse to scattering on bad lands.

Fall and winter grazing land, fair on bench, poor on bad lands.

N.89°50'E., on a random line bet. secs. 12 and 13.

- 40.00 Set temp. $\frac{1}{4}$ sec. cor.
- 80.28 Intersect the E. bdy. of the Tp., 5 lks. S. of the cor. of secs. 7, 12, 13, and 18, which is an iron post, 2 ins.

SUBDIVISION OF T. 7 S., R. 24 E.

Chains

diam., extending 9 ins. above ground, firmly set, marked, and witnessed as described in the official record of the survey of T. 7 S., R. 25 E.

Thence,

S.89°48'W., on a true line bet. secs. 12 and 13.

Over rolling, rough, and broken bad lands, through medium heavy timber and scattering undergrowth; asc. E. slope 60 ft.

- 6.40 Top of ascent, bears N. and S.; gradual descent of 15 ft.
 19.60 Draw, from SE., drains N.15°E.; asc. 15 ft.
 24.40 Spur, projects N.15°E. approximately 40 chs. dist.; desc. 55 ft.
 27.10 Draw, from SE., drains N.; asc. NE. slope 65 ft.
 36.70 Spur, projects NW. about 30 chs. dist.; desc. gradual SW. slope 25 ft. to
 40.14 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

S12

S13

1936

from which

A cedar, 12 ins. diam., bears S.3°45'W., 65 lks. dist., mkd. $\frac{1}{4}$ S 13 B T.

A cedar, 9 ins. diam., bears N.18°30'W., 119 lks. dist., mkd. $\frac{1}{4}$ S 12 B T.

- 40.30 Draw, from SE. approximately 20 chs. dist., 5 ft. below $\frac{1}{4}$ sec. cor., drains NW.; begin gradual ascent of 10 ft., over NE. slope.
 51.40 Spur, slopes NW. about 8 chs. dist.; desc. SW. slope 70 ft.
 61.20 A main draw, drains N.10°E.; asc. SE. slope 110 ft.
 74.30 Spur, slopes NE. approximately 10 chs. dist.; desc. gradual NW. slope 5 ft. to
 80.28 The cor. of secs. 11, 12, 13, and 14.

Land, rolling, rough, and broken bad lands, draining generally to the N.; broken ledges and outcroppings of red, yellow, and light colored sandstone formation.

Soil, red sand, sandy loam, or red sandy clay, shallow to about $2\frac{1}{2}$ ft. deep on tops and slopes, and several ft. deep in bottoms, and lying on varied colored clay subsoils or on bedrock, 1st. to 4th. rate. Alternate layers of varied colored clays and sandstone on some of the tops and slopes, 4th. rate.

Timber, scattering to a heavy growth of cedar.

Undergrowth, shadscale, sagebrush, and cotton brush; scattering growth of gramma grass.

Poor winter grazing land.


SUBDIVISION OF T. 7 S., R. 24 E.

Chains

N.0°01'W., bet. sees. 11 and 12.

Over rolling, rough, and broken bad lands, through a heavy growth of timber and scattering undergrowth; asc. gentle SE. slope 5 ft.

- 2.90 Spur, slopes NE. about 10 chs. dist.; desc. 55 ft.
- 16.20 Draw, drains NE.; gradual ascent of 5 ft.
- 18.40 Top of ascent, bears NE. and SW.; desc. NW. slope 75 ft.
- 38.90 Draw, from W., drains SE. about 3 chs. dist., thence northeasterly; asc. SE. slope 40 ft. to
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.




from which

A cedar, 3 ins. diam., bears N.45°15'E., 72 lks. dist., mkd. B T.

A cedar, 6 ins. diam., bears N.66°15'W., 56 lks. dist., mkd. $\frac{1}{4}$ S 11 B T.

- 47.90 Spur, 15 ft. above $\frac{1}{4}$ sec. cor., projects NE. approximately 30 chs. dist.; desc. NW. slope 55 ft.
- 59.80 Draw, heads SE. about 3 chs. dist., drains N.70°W. about 6 chs. dist., thence NW.; asc. gradual SW. slope 5 ft.
- 64.20 Spur, projects N.60°W.; desc. NE. slope 45 ft.
- 76.90 Draw, heads E. about 2 chs. dist., drains W. approximately 6 chs. dist., thence NW.; asc. S. slope 10 ft. to
- 80.00 On top of spur, projecting NW., set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 1, 2, 11, and 12, with brass cap mkd.



from which

A cedar, 7 ins. diam., bears N.39°30'E., 137 lks. dist., mkd. T 7 S R 24 E S 1 B T.

A cedar limb, 4 ins. diam., bears S.63°15'E., 48 lks. dist., mkd. B T.

A cedar limb, 5 ins. diam., bears S.79°45'W., 56 lks. dist., mkd. B T.

A cedar limb, 8 ins. diam., bears N.12°30'W., 104 lks. dist., mkd. B T.

Land, rolling, rough, and broken bad lands, draining generally to the N. and NE.; outcroppings of yellow and light colored sandstone formation.

Soil, red sand, sandy loam, or red sandy clay, about 1 to

SUBDIVISION OF T. 7 S., R. 24 E.

Chains

3 ft. deep on tops and slopes and approximately 3 to 6 ft. deep in bottoms, and lying on a brown, yellow, or light colored clay subsoil or on bedrock, 1st. to 4th. rate. Alternate layers of varied colored clays on some of the tops and slopes, 4th. rate.

Timber, medium to heavy growth of cedar.

Undergrowth, black sagebrush and shadscale; a sparse to scattering growth of gramma grass.

Poor winter grazing land.

N.89°48'E., on a random line bet. secs. 1 and 12.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.28 Intersect the E. bdy. of the Tp., 10 lks. S. of the cor. of secs. 1, 6, 7, and 12, which is an iron post, 2 ins. diam., extending 9 ins. above ground, firmly set, marked, and witnessed as described in the official record of the survey of T. 7 S., R. 25 E.

Thence,

S.89°44'W., on a true line bet. secs. 1 and 12.

Over nearly level bottom of swale, through undergrowth of dense short white sagebrush and scattering cotton brush.

3.60 E. bank of wash, 12 ft. high, bears NW. and SE.; wash, drains NW.

5.60 W. bank of the wash, 15 ft. high, bears NW. and SE.

21.20 Wash, 50 lks. wide, 12 ft. deep, drains N.

26.20 Wash, 100 lks. wide, 20 ft. deep, drains NE.

32.70 Leave nearly level bottom of swale, 15 ft. above cor. of secs. 1, 6, 7, and 12, bears NE. and SW., and enter rolling, rough, and broken bad lands; leave undergrowth of white sagebrush and cotton brush, bears NE. and SW., enter scattering black sagebrush and shadscale; begin ascent of 40 ft., over SE. slope.

33.20 Enter a medium heavy growth of timber, bears NE. and SW.

33.70 Spur, projects N.25°E. approximately 20 chs. dist.; desc. NW. slope 30 ft. to

40.14 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

S1

$\frac{1}{4}$

S12.

1936

from which

A cedar, 4 ins. diam., bears N.28°15'E., 249 $\frac{1}{2}$ lks. dist., mkd. $\frac{1}{4}$ S 1 B T.

A cedar, 5 ins. diam., bears S.84°45'E., 269 lks. dist., mkd. $\frac{1}{4}$ S 12 B T.

SUBDIVISION OF T. 7 S., R. 24 E.

Chains

- 41.40 Wash, 90 lks. wide, 20 ft. deep, in the bottom of hollow, 25 ft. below $\frac{1}{4}$ sec. cor., drains N.15°E.; asc. NE. slope 80 ft.
- 60.60 Top of ascent, bears NE. and SW.; desc. NW. slope 35 ft.
- 72.90 Draw, drains NW.; asc. NE. slope 45 ft. to
- 80.28 The cor. of secs. 1, 2, 11, and 12.
- Land, nearly level bottom of swale, E. 32.70 chs.; rolling, rough, and broken bad lands, remainder of mile; outcroppings of yellow and light colored sandstone formation; general drainage to the N.
- Soil, red sand and sandy loam, about 20 ft. deep across bottom of swale on E. 32.70 chs., 1st. rate; red sand, sandy loam, or red sandy clay, about 1 to 6 ft. deep, lying on a brown, yellow, or light colored clay subsoil or on bedrock, 1st. to 4th. rate, on bad lands on W. 47.58 chs.
- Timber, cedar.
- Undergrowth, white sagebrush, cotton brush, black sagebrush, and shadscale; gramma grass, fair growth in swale, sparse to scattering on bad lands.
- Fall and winter grazing land, fair to good in swale, poor to fair on bad lands.
-
- N.0°01'W., on a true line bet. secs. 1 and 2.
- Over rolling, rough, and broken bad lands, through medium heavy growth of timber and scattering undergrowth; desc. abrupt NE. slope 55 ft.
- 10.00 Leave timber, bears NW. and SE.
- 12.60 Base of steep descent, bears NW. and SE.; enter medium dense undergrowth, bears NW. and SE.; desc. gradual NE. slope 5 ft.
- 14.00 Wash, 100 lks. wide, 7 ft. deep, in the bottom of draw, drains NW.; gradual ascent of 5 ft.
- 23.30 Top of ascent on W. slope of spur, from SE.; desc. N. slope 15 ft. to
- 28.00 Leave rolling, rough, and broken bad lands, bears E. and W.; continue gradual descent of 15 ft. to the true point for $\frac{1}{4}$ sec. cor., over nearly level bottom of swale.
- 40.00 True point for $\frac{1}{4}$ sec. cor. falls on N. edge of wash, 20 lks. wide, 12 ft. deep, draining N.15°E., where the establishment of a cor. monument is impracticable.
- 40.30 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with a sandstone, 7x6x1 ins., mkd. X, deposited at the base for witness $\frac{1}{4}$ sec. cor., with brass cap mkd.

S2 | S1

WC

1936

SUBDIVISION OF T. 7 S., R. 24 E.


Chains

There are no other suitable accessories available.

From this cor., continue gradual descent of 25 ft. to lot cor., over nearly level bottom of swale.

76.20 Wash, 10 lks. wide, 1 ft. deep, drains NE.

80.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with a sandstone, 6x4x1 ins., mkd. X, deposited at the base, for cor. of lots 5 and 12, sec. 1, and lots 8 and 9, sec. 2, with brass cap mkd.



1936

There are no other suitable accessories available.

91.20 Same wash as noted at 40.00 chs., 20 lks. wide, 1 ft. deep, drains NW.


93.60 Leave bottom of swale, 5 ft. below lot cor., begin gradual ascent of 5 ft., over S. slope.

94.40 Spur, from S. 70° E., slopes W. about 1 ch. dist.; desc. gentle N. slope 10 ft. to

97.70 Same wash as noted at 40.00 chs., 20 lks. wide, 1 ft. deep, drains NE.; over level bottom of swale to closing sec. cor.

106.00 Wash, 30 lks. wide, 6 ft. deep, drains NE.

110.40 Intersect the S. bdy. of sec. 36, T. 6 S., R. 24 E., east 8.36 chs. dist. from the cor. of secs. 35 and 36, which is an iron post, 2 ins. diam., extending 9 ins. above ground, firmly set, marked, and witnessed as described in the official record of the survey of T. 6 S., R. 24 E.; and at the point of intersection, set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, with a sandstone, 3x6x2 ins., mkd. X, deposited at the base, for closing cor. of secs. 1 and 2, T. 7 S., with brass cap mkd.



There are no other suitable accessories available.

Land, rolling, rough, and broken bad lands, S. 28.00 chs.; nearly level, gently rolling, and rolling bottom of swale, N. 82.40 chs.; light colored and yellow sandstone formation; general drainage to the N.

Soil, red sand, sandy loam, or red sandy clay, about 1 to 3 ft. deep on tops and slopes and approximately 3 to 12 ft. deep in bottoms, and lying on a brown, yellow, or light colored clay subsoil or on bedrock, 1st. to 4th. rate, on bad lands; red sand, sandy loam, and red sandy clay, several ft. deep in swale on N. 82.40 chs., 1st. to 3rd. rate.

SUBDIVISION OF T. 7 S., R. 24 E.

Chains

Timber, cedar.

Undergrowth, black sagebrush, shadscale, cotton brush, greasewood, and salt brush; poor to fair growth of gramma grass.

Fair to good fall and winter grazing land.

From the cor. of secs. 2, 3, 34, and 35, on the S. bdy. of the Tp., which is an iron post, 2 ins. diam., extending 12 ins. above ground, firmly set, marked, and witnessed as described in the official record of the survey of T. 8 S., R. 24 E.,

N.0°02'W., bet. secs. 34 and 35.

Over rolling, rough, and broken bad lands, through scattering timber and undergrowth; desc. NW. slope 50 ft.

- 1.30 Wash, 10 lks. wide, 1 ft. deep, in the bottom of draw, drains W.; asc. SW. slope 90 ft.
- 4.90 Spur, slopes N.80°W. about 6 chs. dist.; desc. N. slope 125 ft.
- 10.20 Wash, 10 lks. wide, 8 ft. deep, in the bottom of draw, drains W.; asc. SW. slope 70 ft.
- 14.00 Spur, slopes NW. about 4 chs. dist.; desc. NE. slope 80 ft.
- 27.00 Wash, 40 lks. wide, 10ft. deep, in the bottom of draw, drains SW.; asc. S. slope 45 ft.
- 33.50 Spur, from NE., projects W. about 1 ch. dist., then slopes S. approximately 4 chs. dist.; desc. NW. slope 30 ft.
- 39.80 Wash, 10 lks. wide, 1 ft. deep, in the bottom of draw, drains S.60°W.; asc. general SW. slope 5 ft. to
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 8 ins. in the ground to bedrock, with a sandstone, 6x4x1 ins., mkd. X, deposited at the base, and in a mound of stone, 5 ft. base, 2 ft. high, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

S34 | S35

1936

There are no trees within a reasonable distance suitable for marking.

From this $\frac{1}{4}$ sec. cor., continue ascent of 120 ft., over SW. slope to

- 43.80 Leave rolling, rough, and broken bad lands, bears NW. and S.60°E., enter bench; asc. gradual SW. slope 35 ft., over gently rolling top.
- 52.20 Top of ascent, bears NE. and SE.; desc. gradual NW. slope 10 ft. through a medium heavy growth of timber and undergrowth, bearing NE. and SW.
- 73.10 Leave top of bench, bears N.70°E. and S.70°W., enter

SUBDIVISION OF T. 7 S., R. 24 E.

Chains

rolling, rough, and broken bad lands; desc. NW. slope 85 ft.

78.00 Wash, 200 lks. wide, 40 ft. deep, in the bottom of draw, drains S.70°W.; asc. general SW. slope 65 ft. to

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 4 ins. in the ground to bedrock, and in a mound of stone, 5½ ft. base, 2½ ft. high, for cor. of secs. 26, 27, 34, and 35, with brass cap mkd.

T7S | R24E
S27 | S26
S34 | S35
1936

from which

A cedar, 9 ins. diam., bears N.46°30'E., 25 lks. dist., mkd. S 26 B T.

A cedar, 7 ins. diam., bears S.52°45'E., 225 lks. dist., mkd. T 7 S R 24 E S 35 B T.

A cedar, 12 ins. diam., bears S.27°00'W., 22 lks. dist., mkd. T 7 S R 24 E S 34 B T.

A cedar, 10 ins. diam., bears N.25°30'W., 167 lks. dist., mkd. T 7 S R 24 E S 27 B T.

The bearing tree in sec. 26 is too scrubby to permit the full marking.

Land, rolling, rough, and broken bad lands, S. 43.80 chs. and N. 6.90 chs.; rolling and gently rolling top of bench, remainder of mile; outcroppings of yellow and light colored sandstone formation; general drainage to the SW.

Soil, red sand and red sandy clay, about 6 ins. to 3 ft. deep, lying on varied colored clay subsoils or on bedrock, 3rd. and 4th. rate, on bad lands; red sand and red sandy loam, about 1 to 3 ft. deep, lying on a brown, yellow, or on a white chalky clay subsoil, 1st. to 3rd. rate, on bench.

Timber, cedar.

Undergrowth, black sagebrush and shadscale; gramma grass, sparse growth on bad lands, fair on top of bench.

Poor fall and winter grazing land on bad lands, fair on bench.

S.89°58'E., on a random line bet. secs. 26 and 35.

40.00 Set temp. ¼ sec. cor.

79.98 Intersect N. and S. line, 7 lks. S. of the cor. of secs. 25, 26, 35, and 36.

Thence,

S.89°59'W., on a true line bet. secs. 26 and 35.

Over gently rolling top of bench, through dense undergrowth; desc. gradually 55 ft. to ¼ sec. cor., over general NW. slope.

SUBDIVISION OF T. 7 S., R. 24 E.

Chains

- 13.50 Wagon road, bears N.30°W. to U. S. Highway No. 40 and S.30°E. to Watson, Utah.
- 39.99 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with a sandstone, 7x5x2 ins., mkd. X, deposited at the base, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
- S26
—
S35
1936
- There are no other suitable accessories available.
- 44.00 Wash, 200 lks. wide, 3 ft. deep, in the bottom of swale, 5 ft. below $\frac{1}{4}$ sec. cor., drains S.20°W. about 10 chs. dist., thence southwesterly; asc. gentle SE. slope 5 ft. to
- 58.00 Leave top of bench, bears northwesterly and southwesterly, enter rolling, rough, and broken bad lands; undergrowth becomes scattering, bearing NW. and SW.; desc. general SW. slope 25 ft.
- 66.00 Enter a medium heavy growth of timber, bears NE. and SW.
- 66.20 Wash, 20 lks. wide, 3 ft. deep, in the bottom of draw, from NE., drains S.70°W.; asc. general SW. slope 5 ft. to
- 79.98 The cor. of secs. 26, 27, 34, and 35.
- Land, rolling and gently rolling top of bench, E. 58.00 chs.; rolling, rough, and broken bad lands, W. 21.98 chs.; yellow and light colored sandstone formation; general drainage to the SW.
- Soil, red sand and red sandy loam, about 1 to 3 ft. deep, lying on yellow sand, or on a brown, yellow, or white chalky clay subsoil, or on bedrock, 1st. to 3rd. rate, on bench; red sand and red sandy clay, about 6 ins. to 3 ft. deep, lying on varied colored clay subsoils or on bedrock, 3rd. and 4th. rate, on bad lands.
- Timber, cedar.
- Undergrowth, black sagebrush and shadscale; gramma grass, scattering on top of bench, sparse growth on bad lands.
- Fair fall and winter grazing land on bench, poor on bad lands.
-
- N.0°02'W., bet. secs. 26 and 27.
- Over rolling, rough, and broken bad lands, through a medium heavy growth of timber and scattering undergrowth; asc. SW. slope 55 ft.
- 18.30 Leave timber, bears NW. and SE.
- 18.50 Leave rolling, rough, and broken bad lands, bears NW. and SE., enter bench; asc. gradually 35 ft., over nearly level top; through medium dense undergrowth.
- 34.30 Leave top of bench, bears NE. and SW., enter rolling, rough, and broken bad lands; undergrowth becomes scattering, bearing NE. and SW.; desc. NW., slope 15 ft.

SUBDIVISION OF T. 7 S., R. 24 E.

Chains

- 36.50 Wash, 10 lks. wide, 1 ft. deep, in the bottom of draw, drains S.60°W.; asc. SW, slope 20 ft. to $\frac{1}{4}$ sec. cor.
- 36.80 Enter a medium heavy growth of timber, bears NE. and SW.
- 40.00 On top of ascent, bearing NE. and SW., set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$\frac{1}{4}$
 S27 | S26 /
 1936

from which

A cedar, 8 ins. diam., bears S.67°00'E., 15 lks. dist., mkd. $\frac{1}{4}$ S 26 B T.

A cedar, 8 ins. diam., bears S.29°45'W., 49 lks. dist., mkd. $\frac{1}{4}$ S 27 B T.

- 44.70 Wash, 15 lks. wide, 5 ft. deep, in the bottom of draw, 70 ft. below $\frac{1}{4}$ sec. cor., drains S.70°W.; asc. 80 ft. along general SW. slope.
- 67.30 Wash, 15 lks. wide, 6 ft. deep, drains S.60°W.
- 75.70 Leave rolling, rough, and broken bad lands, bears NW. and SE., enter bench; leave timber, bears NW. and SE.; asc. gradual SE. slope 25 ft. to sec. cor., over gently rolling top.
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 22, 23, 26, and 27, with brass cap mkd.

T7S | R24E
 S22 | S23
 S27 | S26 /
 1936

from which

A cedar, 7 ins. diam., bears S.32°45'W., 398 lks. dist., mkd. S 27 B T.

This tree is too scrubby to permit the full marking, and there are no suitable bearing trees available in secs. 22, 23, and 26; therefore, I raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

Land, nearly level, gently rolling, and rolling top of bench, broken by bad lands, draining SW., thence generally S.; outcroppings of yellow and light colored sandstone formation.

Soil, red sand and red sandy clay, about 6 ins. to 3 ft. deep, lying on varied colored clay subsoils or on bedrock, 3rd. and 4th. rate, on bad lands; red sand and red sandy loam, about 1 to 3 ft. deep, lying on a brown, yellow, or white chalky clay subsoil, 1st. to 3rd. rate, on bench.

Timber, cedar.

Undergrowth, black sagebrush and shadscale; gramma grass, sparse growth on bad lands, fair on top of bench.

Poor fall and winter grazing land on bad lands, fair on bench.

SUBDIVISION OF T. 7 S., R. 24 E.

Chains

N.89°59'E., on a random line bet. secs. 23 and 26.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

79.98 Intersect N. and S. line, 9 lks. N. of the cor. of secs. 23, 24, 25, and 26.

Thence,

N.89°57'W., on a true line bet. secs. 23 and 26.

Over gently rolling top of bench, through dense undergrowth; gradual descent of 20 ft.

25.10 Wash, 10 lks. wide, 1 ft. deep, in the bottom of draw, drains S.20°E.; asc. gradually 5 ft. to $\frac{1}{4}$ sec. cor., over nearly level land.

39.99 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with a sandstone, 8x4x2 ins., mkd. X, deposited at the base, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

S23
 $\frac{1}{4}$ ———
 S26
 1936

No other suitable accessories are available.

This cor. stands at the top of ascent, bearing N.20°E. and S.20°W.; begin gradual descent of 55 ft., over NW. slope.

70.30 Wash, 10 lks. wide, 2 ft. deep, in the bottom of draw, drains S.20°W.; asc. gradual SE. slope 60 ft. to sec. cor.

76.00 Wagon road, bears N.80°W. to U. S. Highway No. 40 and S.80°E. to Watson, Utah.

77.00 Wash, 6 lks. wide, 1 ft. deep, heads NE. about 1 ch. dist., drains S.10°W.

79.98 The cor. of secs. 22, 23, 26, and 27.

Land, rolling, gently rolling, and nearly level top of bench, draining to the SW.; yellow and light colored sandstone formation.

Soil, red sand and red sandy loam, varying in depth from about $1\frac{1}{2}$ to 3 ft. on tops and slopes and to about 6 ft. in bottoms, and lying on a yellow sand, or on a brown, yellow, or white chalky clay subsoil, or on bedrock, 1st. and 2nd. rate.

No timber.

Undergrowth, dense black sagebrush and scattering shadscale; a scattering growth of gramma grass.

Fair fall and winter grazing land.

N.0°02'W., bet. secs. 22 and 23.


Over gently rolling top of bench, through dense undergrowth; asc. gradual SE. slope 60 ft. to $\frac{1}{4}$ sec. cor.

SUBDIVISION OF T. 7 S., R. 24 E.

Chains

1.30 Wagon road, bears N.80°W. to U. S. Highway No. 40 and S.80°E. to Watson, Utah.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with a sandstone, 8x6x2 ins., mkd. X, deposited at the base, for 1/4 sec. cor., with brass cap mkd.




No other suitable accessories are available.

From this cor., continue gradual ascent of 35 ft. to sec. cor., over gentle S. and SE. slope.

73.60 Wash, 10 lks. wide, 1 ft. deep, drains S.60°E.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, with a sandstone, 7x4x2 ins., mkd. X, deposited at the base, for cor. of secs. 14, 15, 22, and 23, with brass cap mkd.



No other suitable accessories are available.

Land, rolling and gently rolling top of bench, draining generally to the S.; yellow and light colored sandstone formation.

Soil, red sand and red sandy clay loam, varying in depth from about 1 1/2 to 6 ft.; and lying on yellow sand, or on a brown, yellow, or white chalky clay subsoil, or on bedrock, 1st. and 2nd. rate.

No timber.

Undergrowth, dense black sagebrush and scattering shadscale; sparse to medium dense growth of gramma grass.

Fair fall and winter grazing land.

S.89°57'E., on a random line bet. secs. 14 and 23.

40.00 Set temp. 1/4 sec. cor.

80.00 Intersect N. and S. line, 9 lks. S. of the cor. of secs. 13, 14, 23, and 24.

Thence,

S.89°59'W., on a true line bet. secs. 14 and 23.

Over gently rolling top of bench, through dense undergrowth; desc. gradual NW. slope 10 ft.


6.10 Wash, 10 lks. wide, 1 ft. deep, in the bottom of draw, drains S.20°W.; asc. gentle SE. slope 20 ft. to

40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the

SUBDIVISION OF T. 7 S., R. 24 E.

Chains

ground, with a sandstone, 6x4x2 ins., mkd. X, deposited at the base, for $\frac{1}{4}$ sec. cor., with brass cap mkd.



No other suitable accessories are available.

From this cor., continue over gently rolling land to sec. cor.

- 46.50 Wash, 10 lks. wide, 1 ft. deep, drains S.20°W.
- 73.20 Wash, 10 lks. wide, 4 ft. deep, drains S.10°W.
- 80.00 The cor. of secs. 14, 15, 22, and 23, 20 ft. below $\frac{1}{4}$ sec. cor.

Land, rolling and gently rolling top of bench, draining generally to the S.; yellow and light colored sandstone formation.

Soil, red sand and red sandy clay loam, about $1\frac{1}{2}$ to 6 ft. deep, and lying on yellow sand, or on a brown, yellow, or white chalky clay subsoil, or on bedrock, 1st. and 2nd. rate.

No timber.


Undergrowth, dense black sagebrush and scattering shade-scale; sparse to medium dense growth of gramma grass.

Fair fall and winter grazing land.

N.0°02'W., bet. secs. 14 and 15.

Over gently rolling top of bench, through dense undergrowth; asc. gradual general S. slope 70 ft. to $\frac{1}{4}$ sec. cor.

- 32.80 Wash, 10 lks. wide, 1 ft. deep, drains S.10°E.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with a sandstone, 5x4x2 ins., mkd. X, deposited at the base, for $\frac{1}{4}$ sec. cor., with brass cap mkd.



No other suitable accessories are available.

- 57.30 Wagon road, bears N.80°W. to U. S. Highway No. 40 and S.80°E. to Watson, Utah.
- 66.40 Wash, 10 lks. wide, 3 ft. deep, drains NE.
- 70.60 Leave top of bench, bears N.70°W. and S.70°E., 5 ft. above $\frac{1}{4}$ sec. cor.; enter rolling, rough, and broken bad lands; desc. general NW. slope 70 ft. to sec. cor.

.SUBDIVISION OF T. 7 S., R. 24 E.

Chains

71.00 Enter a medium heavy growth of timber, bears N.70°W. and S.70°E.; undergrowth becomes scattering.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 10, 11, 14, and 15, with brass cap mkd.

T7S | R24E
S10 | S11
S15 | S14
1936

from which

A cedar, 10 ins. diam., bears N.8°30'E., 152 lks. dist., mkd. S 11 B T.

A cedar, 12 ins. diam., bears S.79°30'E., 63 lks. dist., mkd. S 14 B T.

A cedar, 7 ins. diam., bears S.69°15'W., 127 lks. dist., mkd. S 15 B T.

A cedar, 8 ins. diam., bears N.34°00'W., 233 lks. dist., mkd. S 10 B T.

The bearing trees are too scrubby to permit the full marking.

Land, rolling and gently rolling top of bench, draining generally to the S. and SW., S. 70.60 chs.; rolling, rough, and broken bad lands, draining NE., N. 9.40 chs.; outcroppings of red, yellow, and light colored sandstone formation.

Soil, red sand, and red sandy clay loam, about 1 to 6 ft. deep, lying on a yellow sand, or on a brown, yellow, or white sandy clay subsoil or on bedrock, 1st. and 2nd. rate, on bench; red sand, sandy loam, or red sandy clay, shallow to about 2½ ft. deep on tops and slopes, and several ft. deep in bottoms, and lying on varied colored clay subsoils or on bedrock, 1st. to 4th. rate, on bad lands.

Timber, cedar.

Undergrowth, black sagebrush and shadscale; gramma grass, scattering to medium dense on bench, sparse to scattering on bad lands.

Fall and winter grazing land, fair on bench, poor on bad lands.

N.89°59'E., on a random line bet. secs. 11 and 14.

40.00 Set temp. ¼ sec. cor.

80.06 Intersect N. and S. line, 9 lks. S. of the cor. of secs. 11, 12, 13, and 14.

Thence,

S.89°55'W., on a true line bet. secs. 11 and 14.

Over rolling, rough, and broken bad lands, through a heavy growth of timber and scattering undergrowth; asc. E. slope 20 ft.

SUBDIVISION OF T. 7 S., R. 24 E.

Chains

- 2.40 Spur, projects N. about 1.50 chs. dist., thence northeasterly; desc. 25 ft., over small draws and spurs, putting to the N. and NE.
- 33.80 Wash, 15 lks. wide, 10 ft. deep, in the bottom of draw, drains NE.; asc. gradual E. slope 15 ft.
- 37.40 Spur, from S., projects N.20°E. approximately 25 chs. dist.; desc. W. slope 15 ft. to
- 40.03 Set an iron post, 3 ft. long, 1 in. diam., 16 ins. in the ground to bedrock, and in a mound of stone, 5½ ft. base, 1½ ft. high, for ¼ sec. cor., with brass cap mkd.

S11

¼

S14

1936

from which

A cedar, 10 ins. diam., bears N.56°00'E., 21 lks. dist., mkd. ¼ S 11' B T.

A cedar, 12 ins. diam., bears S.9°00'E., 68 lks. dist., mkd. ¼ S 14' B T.

- 40.60 Wash, 15 lks. wide, 6 ft. deep, in the bottom of draw, 5 ft. below ¼ sec. cor., drains NW.; asc. NE. slope 25 ft.
- 51.50 Spur, projects N.25°W. about 20 chs. dist.; desc. gradual SW. slope 15 ft.
- 59.60 Wash, 10 lks. wide, 3 ft. deep, drains N.25°W.
- 67.70 Wash, 30 lks. wide, 5 ft. deep, in the bottom of draw, drains N.20°E.; asc. SE. slope 65 ft.
- 74.10 Spur, projects N.10°E. approximately 25 chs. dist.; desc. NW. slope 40 ft. to
- 80.06 The cor. of secs. 10, 11, 14, and 15.

Land, rolling, rough, and broken bad lands, draining to the NE.; outcroppings of yellow and light colored sandstone formation.

Soil, red sand, sandy loam, or red sandy clay, shallow to about 2½ ft. deep on tops and slopes, and several ft. deep in bottoms, and lying on varied colored clay subsoils or on bedrock, 1st. to 4th. rate. Alternate layers of varied colored clays and sandstone on some of the tops and slopes, 4th. rate.

Timber, varies from a scattering to a heavy growth of cedar.

Undergrowth, black sagebrush, shadscale, and cotton brush; scattering growth of gramma grass.

Poor to fair winter grazing land.

N.0°02'W., bet. secs. 10 and 11.

Over rolling, rough, and broken bad lands; through a medium heavy growth of timber and scattering undergrowth; desc. gradual NW. slope 5 ft.

SUBDIVISION OF T. 7 S., R. 24 E.

Chains

- 0.80 Wash, 10 lks. wide, 3 ft. deep, in the bottom of draw, drains N.10°E.; asc. 25 ft., along SE. slope.
- 17.00 Spur, projects N.15°E. approximately 30 chs. dist.; desc. NW. slope 70 ft. to
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$\frac{1}{4}$
 S10 | S11
 1936

from which

A cedar, 12 ins. diam., bears N.56°00'E., 62 lks. dist., mkd. $\frac{1}{4}$ S 11 B T.

A cedar, 18 ins. diam., bears S.30°00'W., 102 lks. dist., mkd. $\frac{1}{4}$ S 10 B T.

- 54.50 Wash, 15 lks. wide, 5 ft. deep, in the bottom of draw, 60 ft. below $\frac{1}{4}$ sec. cor., drains N.60°E.; asc. SE. slope 35 ft.
- 57.60 Spur, projects N.60°E. about 25 chs. dist.; desc. NW. slope 40 ft.
- 61.60 Wash, 20 lks. wide, 3 ft. deep, drains N.60°E.
- 64.90 Wash, 20 lks. wide, 3 ft. deep, in the bottom of draw, drains N.60°E.; asc. SE. slope 45 ft.
- 76.20 Spur, projects NE.; desc. NW. slope 15 ft. to
- 79.00 Bearing of slope changes from NE. and SW. to N. and S.; desc. gradually 5 ft. to
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 2, 3, 10, and 11, with brass cap mkd.

T7S | R24E
 S3 | S2
 S10 | S11
 1936

from which

A cedar, 8 ins. diam., bears N.62°30'E., 235 lks. dist., mkd. S 2 B T.

A cedar, 12 ins. diam., bears S.23°00'E., 150 lks. dist., mkd. S 11 B T.

A cedar, 4 ins. diam., bears S.45°30'W., 86 $\frac{1}{2}$ lks. dist., mkd. T 7 S R 24 E S 10 B T.

A cedar, 10 ins. diam., bears N.49°30'W., 58 lks. dist., mkd. S 3 B T.

Land, rolling, rough, and broken bad lands, draining to the NE.; outcroppings of red, yellow, and light colored sandstone formation.

Soil, red sand, sandy loam, or red sandy clay, about 1 to 3 ft. deep on tops and slopes and approximately 3 to 6 ft. deep in bottoms, and lying on a brown, yellow, or light colored clay subsoil or on bedrock, 1st. to 4th. rate.

SUBDIVISION OF T. 7 S., R. 24 E.

Chains

Alternate layers of varied colored clays and sandstone on portions of mile, 4th. rate.

Timber, cedar.

Undergrowth, black sagebrush, shadscale, and cotton brush; scattering growth of gramma grass.

Poor to fair winter grazing land.

N.89°55'E., on a random line bet. secs. 2 and 11.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.02 Intersect N. and S. line, 7 lks. S. of the cor. of secs. 1, 2, 11, and 12.

Thence,

S.89°52'W., on a true line bet. secs. 2 and 11.

Over rolling, rough, and broken bad lands, through scattering timber and undergrowth; desc. SW. slope 40 ft.

6.90 Ease of descent, bears NW. and SE.; over level bottom of hollow.

9.30 Wash, 15 lks. wide, 10 ft. deep, drains NW.

14.00 Wash, 15 lks. wide, 6 ft. deep, drains N.

17.00 Leave bottom of hollow, bears NE. and SW.; asc. SE. slope 30 ft.

22.00 Spur, projects N.20°E. approximately 60 chs. dist.; desc. NW. slope 50 ft.

35.10 Wash, 10 lks. wide, 6 ft. deep, in the bottom of draw, drains N.; gradual ascent of 15 ft.

38.60 Spur, slopes N.10°E. about 1 ch. dist.; desc. W. slope 15 ft. to

40.01 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground; for $\frac{1}{4}$ sec. cor., with brass cap mkd.

S2

S11

1936

from which

A cedar, 3 ins. diam., bears N.1°00'E., 32 lks. dist., mkd. B T.

A cedar, 6 ins. diam., bears S.42°30'W., 60 lks. dist., mkd. $\frac{1}{4}$ S 11 B T.

43.00 Base of descent, 5 ft. below $\frac{1}{4}$ sec. cor., bears N.60°E. and S.60°W.; over level bottom of hollow.

49.50 E. edge of wash, 200 lks. wide, 15 ft. deep, drains N.20°E.

53.00 Wash, 100 lks. wide, 12 ft. deep, drains NE.

SUBDIVISION OF T. 7 S., R. 24 E.

Chains

- 62.50 Leave bottom of hollow, bears NE. and SE.; enter a medium heavy growth of timber, bears NE. and SW.; asc. SE. slope 70 ft.
- 66.90 Wash, 10 lks. wide, 1 ft. deep, heads N.80°W. about 3 chs. dist., drains S.80°E.
- 75.00 Spur, projects N.30°E. approximately 30 chs. dist.; desc. NW. slope 10 ft.
- 78.40 Wash, 10 lks. wide, 1 ft. deep, in the bottom of draw, heads S. about 4 chs. dist., drains N.; asc. gradual E. slope 5 ft. to
- 80.02 The cor. of secs. 2, 3, 10, and 11.

Land, rolling, rough, and broken bad lands, draining to the NE.; red, yellow, and light colored sandstone formation.

Soil, red sand, sandy loam, or red sandy clay, about 1 to 3 ft. deep on tops and slopes and about 3 to 15 ft. deep in bottoms, and lying on a brown, yellow, or light colored clay subsoil or on bedrock, 1st. to 4th. rate.

Timber, varies from a scattering to a medium heavy growth of cedar.

Undergrowth, black sagebrush, shadscale, and cotton brush; gramma grass, sparse to scattering on tops and slopes, a fair growth on level bottoms of hollows.

Poor to fair fall and winter grazing land.

N.0°02'W., on a true line bet. secs. 2 and 3.

Over rolling, rough, and broken bad lands, through a medium heavy growth of timber and scattering undergrowth; desc. gradually 5 ft., along E. slope.

- 2.20 Wash, 10 lks. wide, 1 ft. deep, in the bottom of draw, drains N.10°E. about 4 chs. dist., thence NE.; asc. SE. slope 15 ft.
- 6.80 Spur, projects NE. approximately 10 chs. dist.; desc. 30 ft.
- 16.00 Wash, 10 lks. wide, 1 ft. deep, in the bottom of draw, heads S.20°W. about 3 chs. dist., drains N.20°E.; asc. 20 ft.
- 21.80 Spur, projects NE. approximately 8 chs. dist.; desc. 35 ft.
- 25.10 Wash, 25 lks. wide, 4 ft. deep, drains N.80°E. about 6 chs. dist., thence NE.
- 32.60 Wash, 15 lks. wide, 2 ft. deep, in the bottom of draw, drains N.60°E.; asc. SE. slope 50 ft. to
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

SUBDIVISION OF T. 7 S., R. 24 E.

Chains

from which

A cedar, 6 ins. diam., bears S. 78° 30' E., 42 lks. dist., mkd. $\frac{1}{4}$ S 2 B T.

A cedar, 8 ins. diam., bears west, 14 lks. dist., mkd. $\frac{1}{4}$ S 3 B T.

- 44.30 Spur, 5 ft. above $\frac{1}{4}$ sec. cor., projects N. 70° E. approximately 40 chs. dist.; desc. NW. slope 65 ft.
- 56.40 Wash, 50 lks. wide, 10 ft. deep, in the bottom of draw, drains N. 80° E.; gradual ascent of 20 ft.
- 58.20 Leave medium heavy growth of timber, bears E. and W., and enter scattering.
- 62.90 Spur, projects N. 80° E. about 10 chs. dist.; desc. gradual N. slope 5 ft.
- 65.60 Wash, 10 lks. wide, 4 ft. deep, in the bottom of draw, drains N. 80° E.; gradual ascent of 5 ft.
- 68.00 Spur, projects N. 70° E.; desc. NW. slope 25 ft. to lot cor.
- 75.30 Wagon road, bears NE. to U. S. Highway No. 40 and SW. to Watson, Utah.
- 80.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with a sandstone, 6x5x1 ins., mkd. X, deposited at the base, for cor. of lots 5 and 12, sec. 2, and lots 8 and 9, sec. 3, with brass cap mkd.

| | |
|----|----|
| 8 | 5 |
| S3 | S2 |
| 9 | 12 |

1936

from which

A cedar, 6 ins. diam., bears S. 89° 00' W., 301 lks. dist., mkd. Lot 9 S 3 B T.

There are no other trees suitable for marking, in lots 5, 12, and 8.

- 84.50 Wash, 10 lks. wide, 2 ft. deep, drains NE.
- 96.00 Wash, 10 lks. wide, 1 ft. deep, in the bottom of draw, 35 ft. below lot cor., drains E. about 10 chs. dist., thence northeasterly; asc. gradual SE. slope 5 ft. to closing sec. cor.
- 109.20 Wash, 10 lks. wide, 8 ft. deep, drains N. 70° E.
- 110.70 Intersect the S. bdy. of sec. 35, T. 6 S., R. 24 E., east 8.86 chs. dist. from the cor. of secs. 34 and 35, which is an iron post, 2 ins. diam., extending 9 ins. above ground, firmly set, marked, and witnessed as described in the official record of the survey of T. 6 S., R. 24 E.; and at the point of intersection, set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, with a sandstone, 7x4 $\frac{1}{2}$ x2 $\frac{1}{2}$ ins., mkd. X, deposited at the base, for closing cor. of secs. 2 and 3, T. 7 S., with brass cap mkd.

T6SR24E
 S35
 S3 | S2
 T7S | R24E
 CC
 1936

SUBDIVISION OF T. 7 S., R. 24 E.

Chains

No trees are available within a reasonable distance suitable for marking.

Land, rolling, rough, and broken bad lands, draining to the NE.; red, yellow, and light colored sandstone formation.

Soil, red sand, sandy loam, or red sandy clay, about 1 to 3 ft. deep on tops and slopes and about 3 to 15 ft. deep in bottoms, and lying on a brown, yellow, or light colored clay subsoil or on bedrock, 1st. to 4th. rate.

Timber, cedar.

Undergrowth, black sagebrush, shadscale, cotton brush, and salt brush; a sparse to medium dense growth of gramma grass.

Poor to fair fall and winter grazing land.


From the cor. of secs. 3, 4, 33, and 34, on the S. bdy. of the Tp., which is an iron post, 2 ins. diam., extending 12 ins. above ground, firmly set, marked, and witnessed as described in the official record of the survey of T. 8 S., R. 24 E.,

N.0°02'W., bet. secs. 33 and 34.

Over nearly level and gently rolling top of bench, through medium dense undergrowth; asc. gradual SE. slope 45 ft. to 1/4 sec. cor.

21.40 Wash, 15 lks. wide, 3 ft. deep, drains SE.


40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with a sandstone, 8x5x2 ins., mkd. X, deposited at the base, for 1/4 sec. cor., with brass cap mkd.



There are no other suitable accessories available.

From this cor., continue gradual ascent of 45 ft., over SE. slope to

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, with a sandstone, 8x6x3 ins., mkd. X, deposited at the base, for cor. of secs. 27, 28, 33, and 34, with brass cap mkd.



There are no other suitable accessories available.

Land, nearly level and gently rolling top of bench, draining to the SE.; yellow and light colored sandstone formation.

Soil, red sand and red sandy clay loam, varying in depth

... SUBDIVISION OF T. 7 S., R. 24 E.

Chains

from about 1½ to 6 ft., and lying on yellow sand, or on a brown, yellow, or white chalky clay subsoil, or on bed-rock, 1st. and 2nd. rate.

No timber.

Undergrowth, medium dense black sagebrush and scattering shadscale; sparse to medium dense growth of gramma grass.

Fair fall and winter grazing land.

S.89°58'E., on a random line bet. secs. 27 and 34.

40.00 Set temp. ¼ sec. cor.

79.96 Intersect N. and S. line, 2 lks. S. of the cor. of secs. 26, 27, 34, and 35.

Thence,

N.89°59'W., on a true line bet. secs. 27 and 34.

Over rolling, rough, and broken bad lands, through a medium heavy growth of timber and scattering undergrowth; asc. 20 ft., along general SW. slope.

5.00 Top of ascent, bears NW. and SE.; desc. abrupt general SW. slope 155 ft.

15.20 Wash, 50 lks. wide, 10 ft. deep, in the bottom of draw, drains S.10°W.; asc. general E. slope 110 ft.

22.10 Spur, projects S. approximately 10 chs. dist.; desc. steep W. slope 105 ft.

29.70 Wash, 50 lks. wide, 15 ft. deep, in the bottom of draw, from NW., drains S.80°E.; asc. NE. slope 115 ft. to

39.98 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for ¼ sec. cor., with brass cap mkd.

S27
¼
S34
1936

from which

A cedar, 8 ins. diam., bears N.47°30'E., 99 lks. dist., mkd. ¼ S 27 B T.

A cedar, 12 ins. diam., bears S.29°15'W., 260 lks. dist., mkd. ¼ S 34 B T.

43.40 Wash, 10 lks. wide, 2 ft. deep, drains N.20°E.

52.00 Leave rolling, rough, and broken bad lands, 30 ft. above ¼ sec. cor., bears N.60°E. and S.15°E.; enter bench; leave timber, bears NE. and SE.; asc. gradual SE. slope 25 ft. to sec. cor., over nearly level and gently rolling top, through medium dense undergrowth.

79.96 The cor. of secs. 27, 28, 33, and 34.

Land, rolling, rough, and broken bad lands, E. 52.00 chs.; nearly level and gently rolling top of bench, W. 27.96 chs.; yellow and light colored sandstone formation; general

SUBDIVISION OF T. 7 S., R. 24 E.

Chains

drainage to the S.

Soil, red sand and red sandy clay, about 6 ins. to 3 ft. deep, lying on varied colored clay subsoils or on bedrock 3rd. and 4th. rate, on bad lands; red sand and red sandy loam, about 1 to 3 ft. deep, lying on yellow sand, or on a brown, yellow, or white chalky clay subsoil, or on bedrock, 1st. to 3rd. rate, on bench.

Timber, cedar.

Undergrowth, black sagebrush, shadscale, cotton brush, and salt brush; gramma grass, sparse growth on bad lands, scattering to medium dense on top of bench.

Fall and winter grazing land, poor on bad lands, fair on bench.


N.0°02'W., bet. secs. 27 and 28.

Over nearly level and gently rolling top of bench, through medium dense undergrowth; asc. gradual SE. slope 25 ft.

10.00 Wagon road, across Dead Man's Bench, bears N.20°E. and S.20°W.

23.40 Top of ascent, bears N.30°E. and S.30°W.; desc. gradual NW. slope 10 ft. to

40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with a sandstone, 6x5x2 ins., mkd. X, deposited at the base, for $\frac{1}{4}$ sec. cor., with brass cap mkd.




There are no other suitable accessories available.

From this cor., over nearly level and gently rolling land to sec. cor.

59.20 Wash, 15 lks. wide, 5 ft. deep, drains S.60°W.

30.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, with a sandstone, 10x7x3 ins., mkd. X, deposited at the base, for cor. of secs. 21, 22, 27, and 28, with brass cap mkd.



There are no other suitable accessories available.

This sec. cor. is located 15 ft. above the $\frac{1}{4}$ sec. cor.

Land, nearly level and gently rolling top of bench; yellow and light colored sandstone formation; drainage SE., S. 23.40 chs.; N. 51.60 chs. drain southwesterly.

Soil, red sand and red sandy clay loam, varying in depth

SUBDIVISION OF T. 7 S., R. 24 E.

Chains

from about $1\frac{1}{2}$ to 6 ft., and lying on yellow sand, or on a brown, yellow, or white chalky clay subsoil, or on bedrock, 1st. and 2nd. rate.

No timber.

Undergrowth, medium dense black sagebrush and scattering shadscale; sparse to medium dense growth of gramma grass.

Fair fall and winter grazing land.

S.89°59'E., on a random line bet. secs. 22 and 27.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

79.92 Intersect N. and S. line, 12 lks. S. of the cor. of secs. 22, 23, 26, and 27.

Thence,

S.89°56'W., on a true line bet. secs. 22 and 27.

Over gently rolling top of bench, through dense undergrowth; asc. gradual general SE. slope 45 ft. to $\frac{1}{4}$ sec. cor.

5.50 Wash, 20 lks. wide, 5 ft. deep, drains S.10°E.

23.90 Wash, 10 lks. wide, 2 ft. deep, drains S.10°E.

39.90 Wash, 10 lks. wide, 1 ft. deep, drains S.10°E.

39.96 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

S22

S27

1936

from which

A cedar, 9 ins. diam., bears S.17°30'E., 152 lks. dist., mkd. $\frac{1}{4}$ S 27 B T.

A cedar, 9 ins. diam., bears N.72°30'W., 215 lks. dist., mkd. $\frac{1}{4}$ S 22 B T.

From this cor., continue gradual ascent of 25 ft., over general SE. slope to

53.90 Wagon road, across Dead Man's Bench, bears N.30°E. and S.30°W., on top of ascent, bearing same as road; desc. gradual NW. slope 45 ft. to

79.92 The cor. of secs. 21, 22, 27, and 28.

Land, rolling and gently rolling top of bench, draining generally to the S.; yellow and light colored sandstone formation.

Soil, red sand and red sandy clay loam, varying in depth from about $1\frac{1}{2}$ to 6 ft., and lying on yellow sand, or on a brown, yellow, or white chalky clay subsoil, or on bedrock, 1st. and 2nd. rate.

Timber, a few scattering cedar.

SUBDIVISION OF T. 7 S., R. 24 E.

Chains


Undergrowth, dense black sagebrush and scattering shade-scale; sparse to medium dense growth of gramma grass.
Fair fall and winter grazing land.

N.0°02'W., bet. secs. 21 and 22.

Over gently rolling top of bench, through medium dense undergrowth; gradual ascent of 25 ft.

10.00 Top of ascent, bears NE. and SW.; desc. gradual NW. slope 5 ft. to

40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with a sandstone, 7x5x3 ins., mkd. X, deposited at the base; for 1/4 sec. cor.; with brass cap mkd.




There are no other accessories available.

From this cor., desc. gentle NW. slope 20 ft. to sec. cor.

62.00 Wash, 10 lks. wide, 1 ft. deep, drains S.60°W. about 2 chs. dist., thence westerly.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, with a sandstone, 10x6x2 ins., mkd. X, deposited at the base, for cor. of secs. 15, 16, 21, and 22, with brass cap mkd.



There are no other accessories available.

Land, gently rolling top of bench; draining southwesterly; yellow and light colored sandstone formation.

Soil, red sand and red sandy clay loam, varying in depth from about 1 to 4 ft., and lying on yellow sand, or on a brown, yellow, or white chalky clay subsoil, or on bed-rock, 1st. and 2nd. rate.

No timber.

Undergrowth, dense black sagebrush and scattering shade-scale; sparse to medium dense growth of gramma grass.

Fair fall and winter grazing land.

N.89°56'E., on a random line bet. secs. 15 and 22.

40.00 Set temp. 1/4 sec. cor.

79.88 Intersect N. and S. line, 5 lks. N. of the cor. of secs.

SUBDIVISION OF T. 7 S., R. 24 E.

Chains

14, 15, 22, and 23.

Thence;

S.89°58'W., on a true line bet. secs. 15 and 22.

Over gently rolling top of bench, through dense undergrowth; asc. gradual SE. slope 25 ft.

19.90 Top of ascent, bears N.20°E. and S.20°W.; desc. gradual NW. slope 20 ft. to $\frac{1}{4}$ sec. cor.

24.70 Wagon road, across Dead Man's Bench, bears N.20°E. to U. S. Highway No. 40 and S.20°W. to Watson, Utah.

39.94 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with a sandstone, 9x4x3 ins., mkd. X, deposited at the base, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

S15

$\frac{1}{4}$

S22

1936

There are no other accessories available.

From this cor., continue gradual descent of 55 ft. to sec. cor., over general SW. slope.

51.60 Wash, 10 lks. wide, 1 ft. deep, drains S.60°W.

79.88 The cor. of secs. 15, 16, 21, and 22.

Land, gently rolling top of bench; yellow and light colored sandstone formation; general drainage S., E. 19.90 chs.; remainder of mile drains generally to the SW.

Soil, red sand and red sandy clay loam, varying in depth from about 1 to 4 ft., and lying on yellow sand, or on a brown, yellow, or white chalky clay subsoil, or on bedrock, 1st. and 2nd. rate.

No timber.

Undergrowth, dense black sagebrush and scattering shade-scale; sparse to medium dense growth of gramma grass.

Fair fall and winter grazing land.

N.0°02'W., bet. secs. 15 and 16.

Over gently rolling top of bench, through medium dense undergrowth; asc. gradual S. slope 10 ft.

5.00 Top of ascent, bears E. and S.70°W.; desc. gradual N. slope 15 ft.

5.40 Wash; 10 lks. wide, 3 ft. deep, drains S.70°W.

15.00 Wash; 10 lks. wide, 4 ft. deep, drains S.70°W.

21.60 Wash, 15 lks. wide, 5 ft. deep, in the bottom of draw, drains S.10°W.; asc. gradual general S. slope 40 ft. to $\frac{1}{4}$ sec. cor.

25.10 Same wash as noted at 21.60 chs., 15 lks. wide, 5 ft.


SUBDIVISION OF T. 7 S., R. 24 E.

Chains

deep, drains S.10°E.


37.40 Same wash as noted at 21.60 chs., 10 lks. wide, 3 ft. deep, drains S.10°W.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground to bedrock, with a sandstone, 6x4x1 ins., mkd. X, deposited at the base, and in a mound of stone, 5½ ft. base, 1¼ ft. high, for ¼ sec. cor., with brass cap mkd.



From this cor., continue gradual ascent of 80 ft., over general S. slope to

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, with a sandstone, 6x5x4 ins., mkd. X, deposited at the base, for cor. of secs. 9, 10, 15, and 16, with brass cap mkd.



There are no other accessories available.

Land, rolling and gently rolling top of bench, draining generally to the SW.; yellow and light colored sandstone formation.

Soil, red sand and red sandy clay loam, varying in depth from about 1 to 6 ft., and lying on yellow sand, or on a brown, yellow, or white chalky clay subsoil, or on bedrock, 1st. and 2nd. rate.

No timber.

Undergrowth, medium dense to dense black sagebrush and scattering shadscale; sparse to medium dense growth of gramma grass.

Fair fall and winter grazing land.

N.89°58'E., on a random line bet. secs. 10 and 15.

40.00 Set temp. ¼ sec. cor.

79.88 Intersect N. and S. line, 5 lks. N. of the cor. of secs. 10, 11, 14, and 15.

Thence,

West, on a true line bet. secs. 10 and 15.

Over rolling, rough, and broken bad lands, through medium heavy timber and scattering undergrowth; desc. NW. slope 5 ft.

0.50 Wash, 10 lks. wide, 3 ft. deep, in the bottom of draw, drains N.10°E.; asc. SE. slope 45 ft.

..SUBDIVISION OF T. 7 S., R. 24 E.

Chains

- 3.10 Spur, projects N.15°E.; desc. 25 ft.
- 11.10 Wash, 20 lks. wide, 4 ft. deep, in the bottom of draw, drains N.15°E.; asc. E. slope 25 ft.
- 14.00 Spur, projects N. approximately 20 chs. dist.; gradual descent of 5 ft.
- 23.60 Wash, 10 lks. wide, 2 ft. deep, in the bottom of draw, drains N.10°E.; asc. 80 ft.
- 30.70 Spur, slopes N.10°E. about 1 ch. dist.; desc. 15 ft.
- 31.20 Wash, 10 lks. wide, 5 ft. deep, in the bottom of draw, drains NE.; asc. general NE. slope 15 ft. to
- 39.94 Set an iron post, 3 ft. long, 1 in. diam., 16 ins. in the ground to bedrock, and in a mound of stone, 5 ft. base, 1 1/2 ft. high, for 1/4 sec. cor., with brass cap mkd.

S10

S15

1936

from which

A cedar, 7 ins. diam., bears S.64°30'E., 78 lks. dist., mkd. 1/4 S 15 B T.

A cedar, 7 ins. diam., bears N.68°15'W., 81 lks. dist., mkd. 1/4 S 10 B T.

- 52.20 Leave timber, bears NW. and SE.; undergrowth becomes medium dense.
- 52.30 Leave rolling, rough, and broken bad lands, bears N.60°W. and S.80°E., 10 ft. above 1/4 sec. cor.; enter bench; asc. gradually 5 ft. to sec. cor., over nearly level top.
- 55.10 Wagon road, bears N.70°W. to U. S. Highway No. 40 and S.70°E. to Watson, Utah.
- 79.88 The cor. of secs. 9, 10, 15, and 16.

Land, rolling, rough, and broken bad lands, draining to the NE., E. 52.30 chs.; nearly level top of bench, draining generally to the SW., W. 27.58 chs.; outcroppings of red, yellow, and light colored sandstone formation on bad lands.

Soil, red sand, sandy loam, or red sandy clay, about 1 to 3 ft. deep on tops and slopes and approximately 3 to 6 ft. deep in bottoms, and lying on a brown, yellow, or light colored clay subsoil or on bedrock, 1st. to 4th. rate. Alternate layers of varied colored clays and sandstone on portions of bad lands, 4th. rate.

Timber, cedar.

Undergrowth, black sagebrush, shadscale, and cotton brush; scattering growth of gramma grass.

Fall and winter grazing land, poor on bad lands, fair on top of bench.

N.0°02'W., bet. secs. 9 and 10.

Over nearly level and gently rolling top of bench,

SUBDIVISION OF T. 7 S., R. 24 E.

Chains

- through medium dense undergrowth; asc. gradual general S. slope 30 ft.
- 3.60 Wagon road, bears N.90°W. to U. S. Highway No. 40 and S.80°E. to Watson, Utah.
- 10.00 Wash, 10 lks. wide, 1 ft. deep, drains NE.
- 10.50 Enter scattering timber.
- 20.50 Leave top of bench, bears SE. about 12 chs. dist., thence S.60°E., and W.; enter rolling, rough, and broken bad lands; desc. N. slope 15 ft. to
- 21.30 Wagon road, bears N.10°E. to U. S. Highway No. 40 and S.10°W. to Watson, Utah, on top of spur, projecting N.10°E.; desc. NW. slope 70 ft.
- 24.60 Descent becomes more abrupt; timber becomes medium dense, bearing NE. and SW.
- 31.60 Wash, 10 lks. wide, 2 ft. deep, in the bottom of draw, drains N.70°W.; asc. SW. slope 15 ft.
- 34.50 Spur, projects N.60°W. about 8 chs. dist.; desc. NE. slope 25 ft. to
- 39.50 Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground to bedrock, and in a mound of stone, 5½ ft. base, 1½ ft. high, for witness; sec. cor., with brass cap mkd.
- W C

↑

S9 | S10

1936
- from which
- * A cedar limb, 3 ins. diam., bears N.33°15'E., 29 lks. dist., mkd. W C B T.
- A cedar, 10 ins. diam., bears N.5°15'W., 111 lks. dist., mkd. W C S 9 B T.
- 40.00 True point for ¼ sec. cor. falls in wash, 15 lks. wide, 5 ft. deep, in the bottom of draw, 10 ft. below witness ¼ sec. cor., draining NW. about 5 chs. dist., thence westerly, making the establishment of a cor. monument impracticable.
- 40.50 Leave medium heavy growth of timber, bears NW. and SE., and enter scattering.
- 47.40 Base road as noted at 21.30 chs., bears N.70°W. to U. S. Highway No. 40 and S.20°E. to Watson, Utah, on top of spur, from S.20°E., projecting N.70°W., 15 ft. above true point for ¼ sec. cor.; desc. NE. slope 55 ft.
- 59.30 Wash, 20 lks. wide, 4 ft. deep, in the bottom of draw, drains E. about 10 chs. dist., thence northeasterly; asc. SE. slope 20 ft.
- 61.40 Spur, projects N.70°E. approximately 80 chs. dist.; desc. 10 ft.
- 63.90 Draw, drains NE.; asc. S. slope 10 ft.
- 65.90 S. edge of bench, bears E. about 1 ch. dist., thence north

SUBDIVISION OF T. 7 S., R. 24 E.

Chains

- 60.00 easterly, and W. approximately 10 chs. dist., thence southwesterly; leave timber; over nearly level top, through dense undergrowth.
- 71.10 Fork of the same road as noted at 21.30 chs., bears NE. to U. S. Highway No. 40 and SW. to Watson, Utah.
- 73.60 N. edge of bench, bears N.80°E. and S.80°W.; enter a medium heavy growth of timber, bears same as edge of bench; undergrowth becomes scattering; desc. NW. slope 15 ft.
- 78.10 Wash, 20 lks. wide, 4 ft. deep, in the bottom of draw, drains N.80°W.; asc. SW. slope 10 ft.
- 79.20 Spur, projects N.30°W. approximately 15 chs. dist., thence northerly; desc. gradual NE. slope 5 ft. to
- 80.00 Set an iron post, .3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 3, 4, 9, and 10, with brass cap mkd.

| | |
|------|------|
| T7S | R24E |
| S4 | S3 |
| S9 | S10 |
| 1936 | |

from which

- A cedar, 10 ins. diam., bears N.36°00'E., 71 lks. dist., mkd. B T.
- A cedar, 10 ins. diam., bears S.31°30'E., 36 lks. dist., mkd. S 10 B T.
- A cedar limb, 6 ins. diam., bears S.13°00'W., 46 lks. dist., mkd. S 9 B T.
- A cedar, 12 ins. diam., bears N.36°30'W., 127 lks. dist., mkd. S 4 B T.

The bearing trees are too scrubby to permit the full marking.

Land, nearly level and gently rolling top of bench, draining generally to the SW., S. 20.50 chs.; rolling, rough, and broken bad lands, draining to the N., NE., and NW., N. 59.50 chs.; outcroppings of red, yellow, and light colored sandstone formation on bad lands.

Soil, red sand, sandy loam, or red sandy clay, about 1 to 3 ft. deep on tops and slopes and approximately 3 to 6 ft. deep in bottoms, and lying on a brown, yellow, or light colored clay subsoil or on bedrock, 1st. to 4th. rate. Alternate layers of varied colored clays and sandstone on portions of bad lands, 4th. rate.

Timber, cedar.

Undergrowth, black sagebrush, shadscale, and cotton brush; scattering growth of gramma grass.

Fall and winter grazing land, fair on tops of benches, poor on bad lands.

East, on a random line bet. secs. 3 and 10.

- 40.00 Set temp. $\frac{1}{4}$ sec. cor.

SUBDIVISION OF T. 7 S., R. 24 E.

| Chains | |
|--------|--|
| 79.88 | Intersect N. and S. line, at the cor. of secs. 2, 3, 10, and 11. |
| | Thence, |
| | West, on a true line bet. secs. 3 and 10. |
| | Over rolling, rough, and broken bad lands, through a medium heavy growth of timber and scattering undergrowth; asc. gradual E. slope 20 ft. to E. edge of bench. |
| 2.40 | Wash, 15 lks. wide, 2 ft. deep, in the head of draw, drains NE. |
| 7.40 | E. edge of bench, bears N. and S.; asc. gradually 5 ft., over nearly level top. |
| 3.50 | Top of ascent, bears N. and S.; desc. gradually 5 ft. to |
| 10.30 | W. edge of bench, bears N. and S.; desc. W. slope 10 ft. |
| 13.80 | Wash, 10 lks. wide, 1 ft. deep, in the bottom of draw, drains N.; asc. SE. slope 15 ft. |
| 17.90 | E. edge of bench, bears N.10°E. and S.10°W.; asc. gradually 5 ft., over nearly level top. |
| 19.70 | Top of ascent, bears N.10°E. and S.10°W.; gradual descent of 5 ft. to |
| 25.70 | W. edge of bench, bears N.20°E. and S.10°E.; desc. NW. slope 15 ft. |
| 32.20 | Wash, 20 lks. wide, 3 ft. deep, in the bottom of draw, drains N.20°E. about 6 chs. dist., thence N.70°E.; asc. SE. slope 45 ft. to $\frac{1}{4}$ sec. cor. |
| 36.90 | Wash, 10 lks. wide, 1 ft. deep, drains NE. |
| 39.94 | Set an iron post, 3 ft. long, 1 in. diam., 15 ins. in the ground to bedrock, and in a mound of stone, 5 $\frac{1}{2}$ ft. base, 1 $\frac{1}{2}$ ft. high, for $\frac{1}{4}$ sec. cor., with brass cap mkd. |
| | S3 $\frac{1}{4}$ ----- S10 1936 |
| | from which |
| | A cedar, 6 ins. diam., bears S.44°00'W., 46 lks. dist., mkd. $\frac{1}{4}$ S 10 B T. |
| | A cedar, 24 ins. diam., bears N.80°00'W., 26 lks. dist., mkd. $\frac{1}{4}$ S 3 B T. |
| 41.60 | Spur, 15 ft. above $\frac{1}{4}$ sec. cor., projects N.60°E. approximately 15 chs. dist.; desc. 15 ft. |
| 48.20 | Wash, 12 lks. wide, 3 ft. deep, in the bottom of draw, drains NE.; asc. SE. slope 100 ft. |
| 69.00 | Wagon road, bears N.15°E. to U. S. Highway No. 40 and SW. to Watson, Utah, on top of spur, from SW., projecting N.15°E.; desc. gradually 5 ft. to sec. cor., across the head of draw, draining N. |
| 79.88 | The cor. of secs. 3, 4, 9, and 10. |
| | Land, rolling, rough, and broken bad lands, draining to |

SUBDIVISION OF T. 7 S., R. 24 E.

Chains

the N. and NE.; red, yellow, and light colored sandstone formation.

Soil, red sand, sandy loam, or red sandy clay, about 1 to 3 ft. deep on tops and slopes and about 3 to 10 ft. deep in bottoms, and lying on a brown, yellow, or light colored clay subsoil or on bedrock, 1st. to 4th. rate. Alternate layers of varied colored clays and sandstone on portions of mile, 4th. rate.

Timber, varies from a medium to a heavy growth of cedar.


Undergrowth, black sagebrush, shadscale, and cotton brush; scattering to a medium dense growth of gramma grass.

Poor to fair fall and winter grazing land.

N.0°02'W., on a true line bet. secs. 3 and 4.

Desc. rough NE. slope 55 ft., through a medium heavy growth of timber and scattering undergrowth.

- 5.20 Wash, 10 lks. wide, 1 ft. deep, in the bottom of draw, drains N. about 2 chs. dist., thence NE.; asc. SE. slope 50 ft.
- 9.50 Spur, slopes NE. approximately 5 chs. dist.; desc. 25 ft.
- 15.60 Wash, 10 lks. wide, 1 ft. deep, in the bottom of draw, drains NE. about 5 chs. dist., thence northerly; asc. SE. slope 15 ft.
- 16.90 Spur, projects N.20°E. approximately 10 chs. dist.; desc. NW. slope 35 ft.
- 22.90 Wash, 100 lks. wide, 30 ft. deep, in the bottom of draw, drains NE. about 5 chs. dist., thence northerly; asc. gradual SE. slope 10 ft.
- 35.50 Spur, slopes N.60°E. about 1 ch. dist.; desc. NW. slope 15 ft. to
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.



from which

A cedar, 7 ins. diam., bears N.53°45'E., 302 lks. dist., mkd. $\frac{1}{4}$ S 3 B T.

A cedar, 8 ins. diam., bears S.6°45'W., 286 lks. dist., mkd. $\frac{1}{4}$ S 4 B T.

- 44.50 Wash, 10 lks. wide, 4 ft. deep, drains E. about 1 ch. dist., thence northeasterly.
- 49.20 Wash, 10 lks. wide, 3 ft. deep, in the bottom of draw, 15 ft. below $\frac{1}{4}$ sec. cor., drains N.20°E.; asc. gradual SE. slope 15 ft.
- 55.10 Spur, from SW., projects N.20°W. about 8 chs. dist.,

SUBDIVISION OF T. 7 S., R. 24 E.

Chains

thence northeasterly; desc. gradually 60 ft. across the head of draw, draining N.60°E.

66.90 Same spur as noted at 55.10 chs.; projects N.10°E. approximately 15 chs. dist.; desc. gradual general NW. slope 65 ft. to

80.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for cor. of lots 6 and 12, sec. 3, and lots 8 and 9, sec. 4, with brass cap mkd.

$$\begin{array}{c} 8 \mid 5 \\ S4 \mid S3 \\ 9 \mid 12 \end{array}$$

1936

from which

A cedar, 6 ins. diam., bears N.53°00'E., 262 lks. dist., mkd. B T.

A cedar, 8 ins. diam., bears S.26°30'E., 117 lks. dist., mkd. L 12 S 3 B T.

A cedar, 15 ins. diam., bears S.21°00'W., 377 lks. dist., mkd. L 9 S 4 B T.

A cedar, 6 ins. diam., bears N.78°00'W., 305 lks. dist., mkd. L 8 S 4 B T.

The bearing trees are too scrubby to permit the full marking.

81.20 Wash, 40 lks. wide, 20 ft. deep, in the bottom of draw, 15 ft. below lot cor., drains NE.; asc. SE. slope 45 ft.

85.30 Spur, from SW., at forks, one prong projects N.70°E. about 5 chs. dist., and one prong N.15°W. approximately 15 chs. dist.; desc. abrupt general NE. slope 80 ft. to

93.40 Base of steep descent, bears N.20°W. about 1 ch. dist., thence northerly, and S.20°E.; leave timber, bears same as base of descent; desc. gradually 5 ft., over nearly level bottom of hollow.

106.70 Wash, 50 lks. wide, 20 ft. deep, drains N.20°W.; over level land to

110.63 Intersect the S. bdy. of sec. 34, T. 6 S., R. 24 E., east 9.00 chs. dist. from the cor. of secs. 33 and 34, which is an iron post, 2 ins. diam., extending 9 ins. above ground, firmly set, marked, and witnessed as described in the official record of the survey of T. 6 S., R. 24 E.; and at the point of intersection, set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for closing cor. of secs. 3 and 4, T. 7 S., with brass cap mkd.

T6SR24E

S34

S4|63

T7SR24E

CC

1936

of stone, 2½ ft. base, 1½ ft. high, S. of cor. raise a mound

Land, rolling, rough, and broken bad lands, draining generally to the N.; red, yellow, and light colored sandstone formation.

-SUBDIVISION OF T. 7 S., R. 24 E.

Chains

Soil, red sand, sandy loam, or red sandy clay, about 1 to 3 ft. deep on tops and slopes and approximately 3 to 20 ft. deep in bottoms, and lying on a brown, yellow, or light colored clay subsoil or on bedrock, 1st. to 4th. rate. Alternate layers of varied colored clays and sandstone, on some of the tops and slopes, 4th. rate.

Timber, cedar.

Undergrowth, black sagebrush, shadscale, cotton brush, and salt brush; sparse to a medium dense growth of gramma grass.

Poor to fair fall and winter grazing land.

From the cor. of secs. 4, 5, 32, and 33; on the S. bdy. of the Tp., which is an iron post, 2 ins. diam., extending 12 ins. above ground, firmly set, marked, and witnessed as described in the official record of the survey of T. 7 S., R. 24 E.,

N.0°03'W., bet. secs. 32 and 33.

Over nearly level and gently rolling top of bench, through medium dense undergrowth; desc. gradual general N. slope 45 ft.

- 23.80 Wash, 10 lks. wide, 2 ft. deep, drains S.70°W. about 4 chs. dist., thence northwesterly.
- 32.70 Wash, 10 lks. wide, 4 ft. deep, in the bottom of draw, drains W. approximately 4 chs. dist., thence northwesterly; asc. gradual SW. slope 15 ft. to
- 40.00 On top of ascent, bearing N.80°W. and S.80°E., set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with a sandstone, 8x5x3 ins., mkd. X, deposited at the base, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

S32 | S33

1936

There are no other suitable accessories available.

- 44.90 Wash, 10 lks. wide, 1 ft. deep, in the bottom of draw, 20 ft. below $\frac{1}{4}$ sec. cor., drains S.80°W. about 10 chs. dist., thence northwesterly; asc. gradual SE. slope 15 ft.
- 50.50 Spur, projects S.70°W. approximately 20 chs. dist.; gradual descent of 20 ft.
- 53.20 Wash, 10 lks. wide, 2 ft. deep, in the bottom of draw, drains S.70°W. about 10 chs. dist., thence northwesterly; asc. gentle SE. slope 10 ft.
- 72.50 Wash, 10 lks. wide, 2 ft. deep, drains S.60°W.
- 75.00 Leave top of bench, bears N.70°E. and S.70°W.; enter rolling, rough, and broken bad lands; undergrowth becomes scattering, bearing N.70°E. and S.70°W.; asc. gradually 15 ft., across the head of draw, draining W.

SUBDIVISION OF T. 7 S., R. 24 E.

Chains

75.20 Enter scattering timber.

79.30 Spur, projects S.70°W.; desc. NW. slope 10 ft. to

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 28, 29, 32, and 33, with brass cap mkd.

| | |
|-----|------|
| T7S | R24E |
| S29 | S28 |
| S32 | S33 |

1936

from which

A cedar, 8 ins. diam., bears N.61°45'E., 89 lks. dist., mkd. S 28 B T.

A cedar, 12 ins. diam., bears S.71°30'E., 110 lks. dist., mkd. S 33 B T.

A cedar, 12 ins. diam., bears S.55°15'W., 65 lks. dist.; mkd. S 32 B T.

A cedar, 10 ins. diam., bears N.16°15'W., 36 lks. dist., mkd. S 29 B T.

The bearing trees are too scrubby to permit the full marking.

Land, nearly level and gently rolling top of bench, S. 75.00 chs.; rolling, rough, and broken bad lands, N. 5.00 chs.; yellow and light colored sandstone formation; drainage generally to the SW.

Soil, red sand and red sandy loam, about 1 to 3 ft. deep, lying on yellow sand, or on a brown, yellow, or white chalky clay subsoil, or on bedrock, 1st. to 3rd. rate, on bench; red sand and red sandy clay, about 6 ins. to 3 ft. deep, lying on varied colored clay subsoils or on bedrock, 3rd. and 4th. rate; on bad lands.

Timber, cedar.

Undergrowth, black sagebrush, shadscale, and cotton brush; gramma grass, scattering to medium dense on top of bench, sparse growth on bad lands.

Fall and winter grazing land, fair on bench, poor on bad lands.

S.89°58'E., on a random line bet. secs. 28 and 33.

40.00 Set temp. 1/4 sec. cor.

80.06 Intersect N. and S. line, at the cor. of secs. 27, 28, 33, and 34.

Thence,

N.89°58'W., on a true line bet. secs. 28 and 33.

Over nearly level and gently rolling top of bench, through medium dense undergrowth; asc. gradual SE. slope 10 ft.

9.20 Wagon road, across Dead Man's Bench, bears N.60°E. and

SUBDIVISION OF T. 7 S., R. 24 E.

Chains

S.60°W., on top of ascent, bearing NE. and SW.; desc. gently rolling NW. slope 55 ft. to

- 40.03 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with a sandstone, 5x5x3 ins., mkd. X, deposited at the base, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

S28

S33

1936

There are no other accessories available.

From this cor., continue gradual descent of 55 ft., over gently rolling NW. slope.

- 54.00 Leave medium dense undergrowth, bears NE. and SW., and enter scattering.
- 54.50 Enter a scattering growth of timber.
- 60.50 Wash, 6 lks. wide, 1 ft. deep, in the bottom of draw, drains S.70°W.; asc. gentle SE. slope 15 ft. to
- 73.10 Leave top of bench, bears NE. and S.70°W.; enter rolling, rough, and broken bad lands; desc. general NW. slope 20 ft. to
- 80.06 The cor. of secs. 28, 29, 32, and 33.
- Land, nearly level and gently rolling top of bench, E. 73.10 chs.; rolling, rough, and broken bad lands, W. 6.96 chs.; outcroppings of yellow and light colored sandstone formation; E. 9.20 chs. drain to the SE., and remainder of mile drains generally to the SW.
- Soil, red sand and red sandy loam, about 1 to 3 ft. deep, lying on yellow sand, or on a brown, yellow, or white chalky clay subsoil, or on bedrock, 1st. to 3rd. rate, on bench; red sand and red sandy clay, about 6 ins. to 3 ft. deep, lying on varied colored clay subsoils or on bedrock, 3rd. and 4th. rate, on bad lands.
- Timber, cedar.
- Undergrowth, black sagebrush, shadscale, and cotton brush; gramma grass, scattering to medium dense on top of bench, sparse growth on bad lands.
- Fall and winter grazing land, fair on bench, poor on bad lands.

N.0°03'W., bet. secs. 28 and 29.


Desc. general NW. slope 60 ft., through scattering timber and undergrowth.

- 8.80 Wash, 50 lks. wide, 10 ft. deep, in the bottom of draw, drains S.80°W. about 5 chs. dist., thence northwesterly; asc. abrupt S. slope 50 ft.
- 12.20 Spur, projects N.80°W. approximately 15 chs. dist.; desc. NE. slope 65 ft.

SUBDIVISION OF T. 7 S., R. 24 E.

Chains

- 23.20 Wash, 10 lks. wide, 2 ft. deep, in the bottom of draw, drains NW.; asc. 40 ft.
- 25.00 Spur, slopes N.80°W. about 6 chs. dist.; desc. 15 ft. to
- 31.50 Wash, 20 lks. wide, 4 ft. deep, in the bottom of draw, drains SW.; asc. 30 ft. to $\frac{1}{4}$ sec. cor., along bottom of the wash.
- 33.20 Leave wash, from NW.; asc. along E. side of the draw to
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.




from which

A cedar, 12 ins. diam., bears S.89°00'E., 48 lks. dist., mkd. $\frac{1}{4}$ S 28 B T.

A cedar, 4 ins. diam., bears S.76°45'W., 56 lks. dist., mkd. $\frac{1}{4}$ S 29 B T.

From this cor., continue ascent of 85 ft. to the top of spur, along and near the bottom of the draw.

- 40.80 Same wash as noted at 33.20 chs., 30 lks. wide, 4 ft. deep, drains from NW. to SW.
- 43.50 Same wash as noted at 33.20 chs., 30 lks. wide, 4 ft. deep, drains from NE. to SW.
- 60.60 Spur, slopes N.80°E. about 5 chs. dist.; desc. general NW. slope 10 ft.
- 62.60 Wash, 10 lks. wide, 1 ft. deep, in the bottom of draw, drains S.70°E.; asc. S. slope 15 ft.
- 66.30 Spur, from NW., projects E. approximately 10 chs. dist.; desc. general N. slope 10 ft.
- 72.00 Wash, 10 lks. wide, 1 ft. deep, in the bottom of draw, drains SE.; asc. general SE. slope 25 ft.
- 73.00 Leave rolling, rough, and broken bad lands, bears N.70°E. and S.70°W.; enter bench; undergrowth becomes medium dense, bearing N.70°E. and S.70°W.; desc. gradual NW. slope 5 ft., over gently rolling top to
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 20, 21, 28, and 29, with brass cap mkd.



from which

A cedar, 20 ins. diam., bears N.12°30'E., 38 lks. dist., mkd. S 21 B T.

A cedar, 6 ins. diam., bears S.56°15'E., 54 lks. dist., mkd. B T.

SUBDIVISION OF T. 7 S., R. 24 E.

Chains

A cedar, 6 ins. diam., bears S.8°15'W., 138
lks. dist., mkd. S 29 B T.

A cedar, 8 ins. diam., bears N.50°30'W., 172
lks. dist., mkd. T 7 S R 24 E S 20 B T.

The bearing trees in secs. 21, 28, and 29 are too scrubby
to permit the full marking.

Land, rolling, rough, and broken bad lands, S. 78.00 chs.;
gently rolling top of bench, N. 2.00 chs.; outcroppings
of yellow and light colored sandstone formation; general
drainage to the SW.

Soil, red sand and red sandy clay, about 6 ins. to 4 ft.
deep, lying on varied colored clay subsoils or on bedrock,
3rd. and 4th. rate, on bad lands; red sand and red sandy
loam, about 1 to 3 ft. deep, lying on yellow sand, or on
a brown, yellow, or white chalky clay subsoil, or on bed-
rock, 1st. to 3rd. rate, on bench.

Timber, cedar.

Undergrowth, black sagebrush, shadscale, and cotton brush;
gramma grass, sparse growth on bad lands, scattering to
medium dense on top of bench.

Fall and winter grazing land, poor on bad lands, fair on
bench.

S.89°58'E., on a random line bet. secs. 21 and 28.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.06 Intersect N. and S. line, 2 lks. N. of the cor. of secs.
21, 22, 27, and 28.

Thence,

N.89°57'W., on a true line bet. secs. 21 and 28.

Over gently rolling top of bench, through medium dense
undergrowth; gradual descent of 55 ft.

18.10 Enter a scattering growth of timber.

26.80 Wash, 10 lks. wide, 1 ft. deep, in the bottom of draw,
drains SW. about 10 chs. dist., thence S.70°W.; asc. grad-
ual SE. slope 5 ft. to $\frac{1}{4}$ sec. cor.

31.10 Wash, 10 lks. wide, 1 ft. deep, drains S.20°W.

40.03 Set an iron post, 3 ft. long, 1 in. diam., 15 ins. in the
ground to bedrock, and in a mound of stone, 5 $\frac{1}{2}$ ft. base,
1 $\frac{1}{2}$ ft. high, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

S21 /

$\frac{1}{4}$

S28

1936

from which

A cedar, 12 ins. diam., bears N.27°00'E., 385
lks. dist., mkd. $\frac{1}{4}$ S 21 B T.

A cedar, 8 ins. diam., bears S.60°30'W., 146
lks. dist., mkd. $\frac{1}{4}$ S 28 B T.

SUBDIVISION OF T. 7 S., R. 24 E.

Chains

40.60 Top of ascent, 5 ft. above $\frac{1}{4}$ sec. cor., bears NE. and SW.; leave timber; gradual descent of 35 ft.

62.10 Enter a scattering growth of timber.

65.90 Wash, 50 lks. wide, 4 ft. deep, in the bottom of draw, drains S.10°W.; asc. gradual SE. slope 60 ft.

78.40 Top of ascent, bears NE. and SW.; desc. gradual NW. slope 10 ft. to

80.06 The cor. of secs. 20, 21, 28, and 29.

Land, gently rolling top of bench, draining southwesterly; yellow and light colored sandstone formation.

Soil, red sand and red sandy clay loam, varying in depth from about 1 to 4 ft., and lying on yellow sand, or on a brown, yellow, or white chalky clay subsoil, or on bed-rock, 1st. and 2nd. rate.

Timber, cedar.

Undergrowth, dense black sagebrush and scattering shad-scale; sparse to medium dense growth of gramma grass.

Fair fall and winter grazing land.

N.0°03'W., bet. secs. 20 and 21.

Over rolling top of bench, through medium dense timber and undergrowth; desc. gradual NW. slope 5 ft.

2.60 Wash, 15 lks. wide, 6 ft. deep, in the bottom of draw, heads W. approximately 10 chs. dist., and drains E. about 1 ch. dist., thence northeasterly; asc. gradually 50 ft. to $\frac{1}{4}$ sec. cor., over general SE. slope.


8.20 Wash, 20 lks. wide, 4 ft. deep, drains S.70°E.

28.00 Leave timber, bears E. and NW.

39.80 Wash, 10 lks. wide, 1 ft. deep, heads NW. approximately 8 chs. dist., drains SE.

39.90 Enter a scattering to a medium heavy growth of timber.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.



from which

A cedar, 20 ins. diam., bears N.21°45'E., 27 lks. dist., mkd. $\frac{1}{4}$ S 21 B T.

A cedar, 4 ins. diam., bears N.74°30'W., 58 lks. dist., mkd. $\frac{1}{4}$ S 20 B T.

56.70 Wagon road, across Dead Mar's Bench, bears N.60°E. and S.30°W.

SUBDIVISION OF T. 7 S., R. 24 E.

Chains

57.50

Top of ascent, 60 ft. above $\frac{1}{2}$ sec. cor., bears N.60°E. and S.30°W.; leave timber; desc. gentle NW. slope 5 ft. to

80.00

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 16, 17, 20, and 21, with brass cap mkd.

| | |
|------|------|
| T7S | R24E |
| S17 | S16 |
| S20 | S21 |
| 1936 | |

raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Land, rolling and gently rolling top of bench, draining E. and SE., thence southwesterly; yellow and light colored sandstone formation.

Soil, red sand and red sandy clay loam, varying in depth from about 1 to 4 ft., and lying on yellow sand, or on a brown, yellow, or white chalky clay subsoil, or on bedrock, 1st. and 2nd. rate.

Timber, cedar.

Undergrowth, dense black sagebrush and scattering shade-scale; sparse to medium dense growth of gramma grass.

Pair fall and winter grazing land.

S.89°57'E., on a random line bet. secs. 16 and 21.

40.00

Set temp. $\frac{1}{2}$ sec. cor.

80.00

Intersect N. and S. line, at the cor. of secs. 15, 16, 21, and 22.

Thence,

N.89°57'W., on a true line bet. secs. 16 and 21.

Over gently rolling top of bench, through medium dense undergrowth; desc. gradually 15 ft., along S. slope.

11.40

Wash, 40 lks. wide, 6 ft. deep, in the bottom of draw, drains S.30°W.; asc. gradual SE. slope 20 ft. to $\frac{1}{2}$ sec. cor.

20.30

Wash, 20 lks. wide, 4 ft. deep, drains S.30°E.

40.04

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{2}$ sec. cor., with brass cap mkd.

| |
|------|
| S16 |
| S21 |
| 1936 |

raise a mound of stone, 3 ft. base, 3 ft. high, N. of cor.

61.60

Top of ascent, 25 ft. above $\frac{1}{2}$ sec. cor., bears N. and SW.; desc. gentle NW. slope 5 ft. to sec. cor.

70.50

Wagon road, across Dead Man's Bench, bears N.30°E. and S.10°W.

80.08

The cor. of secs. 16, 17, 20, and 21.

SUBDIVISION OF T. 7 S., R. 24 E.

Chains

Land, nearly level and gently rolling top of bench, draining generally to the SW.; yellow and light colored sandstone formation.

Soil, red sand and red sandy clay loam, varying in depth from about 1 to 6 ft., and lying on yellow sand, or on a brown, yellow, or white chalky clay subsoil, or on bedrock, 1st. and 2nd. rate.

No timber.

Undergrowth, medium dense to dense black sagebrush and scattering shadscale; sparse to medium dense growth of gramma grass.

Fair fall and winter grazing land.


N.0°03'W., bet. secs. 16 and 17.

Over gently rolling top of bench, through medium dense undergrowth; desc. gradual NW. slope 10 ft.

12.50 Wash, 15 lks. wide, 3 ft. deep, in the bottom of draw, drains N.70°W. about 15 chs. dist., thence westerly; asc. gentle SE. slope 15 ft.

36.60 Low ridge or top of ascent, bears N.60°E. and S.60°W.; desc. gradual NW. slope 10 ft. to

40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.



of stone, 3 ft. base, 2 ft. high, W. of cor. raise a mound


42.80 Wash, 10 lks. wide, 1 ft. deep, in the bottom of draw, 5 ft. below $\frac{1}{4}$ sec. cor., drains S.80°W.; asc. gradual SE. slope 35 ft.

67.00 Top of ascent, bears E. and S.60°W.; desc. gradual NW. slope 20 ft.

73.20 Wash, 10 lks. wide, 1 ft. deep, drains N.80°W. about 5 chs. dist., thence southwesterly.

77.00 Wash, 15 lks. wide, 2 ft. deep, in the bottom of draw, drains S.70°W.; asc. gradual SE. slope 5 ft. to

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 8, 9, 16, and 17, with brass cap mkd.



of stone, 3 ft. base, 2 ft. high, W. of cor. raise a mound

Land, rolling and gently rolling top of bench, draining

SUBDIVISION OF T. 7 S., R. 24 E.

Chains

generally to the SW.; yellow and light colored sandstone formation.

Soil, red sand and red sandy clay loam, varying in depth from about 1 to 6 ft., and lying on yellow sand, or on a brown, yellow, or white chalky clay subsoil, or on bed-rock, 1st. and 2nd. rate.

No timber.

Undergrowth, medium dense to dense black sagebrush and scattering shadscale; sparse to medium dense growth of gramma grass.

Fair fall and winter grazing land.

S.89°57'E., on a random line bet. secs. 9 and 16.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.08 Intersect N. and S. line, 2 lks. N. of the cor. of secs. 9, 10, 15, and 16.

Thence,

N.89°56'W., on a true line bet. secs. 9 and 16.

Over nearly level and gently rolling top of bench, through medium dense undergrowth; asc. gradual SE. slope 20 ft.

7.10 Wagon road, across Dead Man's Bench, bears N.10°E. and S.30°W.

20.10 Top of ascent, bears N.70°E. and S.70°W.; desc. gradual NW. slope 40 ft. to

40.04 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

S9

S16

1936

raise a mound of stone, 3 ft. base, 3 ft. high, N. of cor.

From this cor., continue gradual descent of 60 ft. to sec. cor., over general NW. slope.

73.20 Wash, 10 lks. wide, 1 ft. deep, drains S.70°W.

80.08 The cor. of secs. 8, 9, 16, and 17.

Land, nearly level, rolling, and gently rolling top of bench, draining generally to the SW.; yellow and light colored sandstone formation.

Soil, red sand and red sandy clay loam, varying in depth from about 1 to 6 ft., and lying on yellow sand, or on a brown, yellow, or white chalky clay subsoil, or on bed-rock, 1st. and 2nd. rate.

No timber.

Undergrowth, medium dense to dense black sagebrush and

SUBDIVISION OF T. 7 S., R. 24 E.

Chains

shadscale; sparse to medium dense growth of gramma grass. Fair fall and winter grazing land.

N.0°03'W., bet. secs. 8 and 9.

Over gently rolling top of bench, through medium dense undergrowth; asc. gradual SE. slope 30 ft.

13.00 Bill Redman's grave, bears west 1.10 chs. dist.

13.30 Wagon road, bears N.80°E. to U. S. Highway No. 40 and S.80°W. to Watson, Utah, on top of ascent, bearing same as road; desc. gradual NW. slope 25 ft. to


20.90 Leave top of bench, bears E. and W.; enter rolling, rough, and broken bad lands; undergrowth becomes scattering, enter a medium heavy growth of timber, bears E. and W.; desc. abrupt N. slope 65 ft.

27.20 Wash, 15 lks. wide, 2 ft. deep, drains NW. approximately 15 chs. dist., thence northerly.

36.30 Wash, 20 lks. wide, 5 ft. deep, in the bottom of draw, drains NW. about 6 chs. dist., thence northerly; asc. SW. slope 25 ft.

38.10 Spur, slopes N.60°W. about 4 chs. dist.; desc. NE. slope 10 ft. to

40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.



from which

A cedar, 15 ins. diam., bears N.65°30'E., 166 lks. dist., mkd. $\frac{1}{4}$ S 9 B T.

A cedar, 5 ins. diam., bears N.63°15'W., 89 lks. dist., mkd. $\frac{1}{4}$ S 8 B T.

46.70 Wash, 10 lks. wide, 1 ft. deep, in the bottom of draw, 15 ft. below $\frac{1}{4}$ sec. cor., drains N.60°W. approximately 6 chs. dist., thence northerly; asc. SW. slope 10 ft.

48.00 S. edge of bench, bears N.60°W. and S.60°E. about 10 chs. dist., thence northeasterly; over level top to

51.20 N. edge of bench, bears S.10°E. about 1 ch. dist., thence southeasterly, and S.70°W. approximately 4 chs. dist., thence S.; desc. NE. slope 40 ft.

57.80 Wash, 20 lks. wide, 5 ft. deep, in the bottom of draw, drains N.70°W.; asc. SW. slope 30 ft.

63.40 Spur, projects N.70°W. about 10 chs. dist.; desc. NE. slope 80 ft.

79.00 Wash, 10 lks. wide, 1 ft. deep, in the bottom of draw, drains N.10°W. about 2 chs. dist., thence N.70°W.; asc. SW. slope 5 ft. to

.SUBDIVISION OF T. 7 S., R. 24 E.

Chains

80.00

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 4, 5, 8, and 9, with brass cap mkd.

| | |
|------|------|
| T7S | R24E |
| S5 | S4 |
| S8 | S9 |
| 1936 | |

from which

A cedar, 5 ins. diam., bears S.10°30'E., 137 lks. dist., mkd. S 9 B T.

A cedar, 12 ins. diam., bears S.81°30'W., 134 lks. dist., mkd. S 8 B T.

These trees are too scrubby to permit the full marking, and there are no suitable bearing trees available in secs. 4 and 5; therefore, I raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

Land, gently rolling top of bench, S. 20.90 chs.; rolling, rough, and broken bad lands, N, 59.10 chs.; drainage generally to the SW., S. 13.30 chs.; remainder of mile drains to the NW.; outcroppings of red, yellow, and light colored sandstone formation on bad lands.

Soil, red sand, sandy loam, or red sandy clay, about 1 to 3 ft. deep on tops and slopes and approximately 3 to 6 ft. deep in bottoms, and lying on a brown, yellow, or light colored clay subsoil or on bedrock, 1st. to 4th. rate. Alternate layers of varied colored clays and sandstone on portions of bad lands, 4th. rate.

Timber, cedar.

Undergrowth, black sagebrush, shadscale, and cotton brush; scattering growth of gramma grass.

Fall and winter grazing land, fair on top of bench, poor on bad lands.

S.89°56'E., on a random line bet. secs. 4 and 9.

40.00 Set temp. ¼ sec. cor.

80.06 Intersect N. and S. line, at the cor. of secs. 3, 4, 9, and 10.

Thence,

N.89°56'W., on a true line bet. secs. 4 and 9.

Asc. gradual NE. slope 5 ft., through a medium heavy growth of timber and scattering undergrowth.

0.70 Spur, projects N.30°W. approximately 15 chs. dist., thence northerly; desc. abrupt SW. slope 55 ft.

3.00 Wash, 20 lks. wide, 5 ft. deep, in the bottom of draw, drains N.30°W.; asc. NE. slope 45 ft.

9.70 Spur, projects N.10°W. approximately 10 chs. dist.; desc. 45 ft.

15.90 Wash, 20 lks. wide, 4 ft. deep, in the bottom of draw,

SUBDIVISION OF T. 7 S., R. 24 E.

Chains

drains NE.; asc. SE. slope 35 ft.

22.20 Wagon road, bears N.20°E. to U. S. Highway No. 40 and S.10°E. to Watson, Utah, on top of spur, projecting N.20°E.; desc. NW. slope 55 ft.

29.50 Wash, 10 lks. wide, 1 ft. deep, in the bottom of draw, drains N.70°W. about 5 chs. dist., thence northerly; gradual ascent of 10 ft.

33.70 Spur, projects N.70°W. approximately 10 chs. dist.; desc. gradual SW. slope 25 ft. to

40.03 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

S4
 $\frac{1}{4}$ /
S9
1936

from which

A cedar, 6 ins. diam., bears S.38°45'W., 195 lks. dist., mkd. $\frac{1}{4}$ S 9 E T.

A cedar, 8 ins. diam., bears N.66°30'W., 27 lks. dist., mkd. $\frac{1}{4}$ S 4 B T.

42.50 Base of gradual descent, 10 ft. below $\frac{1}{4}$ sec. cor., bears N. and S.; steep descent of 115 ft., over W. slope.

44.20 Wash, 50 lks. wide, 4 ft. deep, in the bottom of gulch, drains N.10°E. approximately 10 chs. dist., thence northwesterly; asc. abrupt E. slope 115 ft. to

46.40 Top of steep ascent, bears N. and S.; asc. gradual E. slope 20 ft.

50.40 E. edge of bench, bears N. about 1 ch., thence northwesterly, and S.10°W. approximately 5 chs. dist., thence S.10°E.; desc. gradually 15 ft., over nearly level top to

68.30 W. edge of bench, bears N. about 1 ch. dist., thence southeasterly, and S.30°W. approximately 1 ch. dist., thence southeasterly; desc. SW. slope 25 ft.

72.00 Wash, 15 lks. wide, 2 ft. deep, in the bottom of draw, drains N.70°W. about 2 chs. dist., thence northeasterly; asc. gradual NE. slope 5 ft.

75.50 Top of ascent, bears N.20°W. and S.20°E.; desc. SW. slope 25 ft. to

80.06 The cor. of secs. 4, 5, 8, and 9.

Land, rolling, rough, and broken bad lands, draining to the N., NE., and NW.; outcroppings of red, yellow, and light colored sandstone formation.

Soil, red sand, sandy loam, or red sandy clay, about 1 to 3 ft. deep on tops and slopes and about 3 to 10 ft. deep in bottoms, and lying on a brown, yellow, or light colored clay subsoil or on bedrock, 1st. to 4th. rate. Alternate layers of varied colored clays and sandstone on portions of mile, 4th. rate.

Timber, varies from a scattering to a medium heavy growth of cedar.

SUBDIVISION OF T. 7 S., R. 24 E.

Chains

Undergrowth, black sagebrush, shadscale, and cotton brush; scattering to a medium dense growth of gramma grass.

Poor to fair fall and winter grazing land.

N.0°03'W., on a true line bet. secs. 4 and 5.

Asc. SW. slope 15 ft., through scattering timber and undergrowth.

- 0.90 Top of ascent, bears E. and W.; continue to ascend 30 ft., across the head of draw, draining SW.
- 7.00 Spur, projects S.60°W. about 7 chs. dist.; desc. NW. slope 80 ft.
- 21.10 Wash, 10 lks. wide, 1 ft. deep, in the bottom of draw, heads SE. about 5 chs. dist., drains N.20°W. about 1 ch. dist., thence northwesterly; asc. SW. slope 15 ft.
- 23.60 Spur, projects N.70°W. approximately 10 chs. dist.; desc. abruptly 80 ft.
- 27.80 Wash, 15 lks. wide, 2 ft. deep, in the bottom of draw, drains W. about 1 ch. dist., thence northwesterly; steep ascent of 40 ft.
- 30.20 Spur, slopes NW. about 1 ch. dist.; desc. 75 ft.
- 35.80 Wash, 50 lks. wide, 3 ft. deep, in the bottom of draw, drains N.10°W. about 3 chs. dist., thence S.70°W.; asc. abrupt SE. slope 105 ft.
- 38.50 Spur, projects S.70°W. approximately 10 chs. dist.; desc. NW. slope 25 ft. to
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for sec. cor., with brass cap mkd.

S5 | S4

1936

from which

A cedar, 7 ins. diam., bears S.74°00'E., 49 lks. dist., mkd. S 4 B T.

A cedar, 7 ins. diam., bears S.27°30'W., 112 lks. dist., mkd. B T.

The bearing tree in sec. 5 is too scrubby to permit the full marking.

From this cor., continue descent of 25 ft., over NW. slope.

- 41.40 Wash, 15 lks. wide, 4 ft. deep, in the bottom of draw, drains SW.; asc. abrupt general SW. slope 145 ft.
- 50.00 Top of steep ascent, bears southeasterly and westerly; asc. gentle SW. slope 10 ft. to
- 69.80 Wagon road, bears N.30°W. to U. S. Highway No. 40 and S.20°E. to Watson, Utah, on top of gradual ascent, bearing same as road; desc. gradual NE. slope 45 ft. to

SUBDIVISION OF T. 7 S., R. 24 E.

Chains

80.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for cor. of lots 5 and 12, sec. 4, and lots 8 and 9, sec. 5, with brass cap mkd.

| | | |
|----|------|----|
| | 8 5 | |
| S5 | | S4 |
| | 9 12 | |

1936

from which

A cedar, 4 ins. diam., bears N.82°00'E., 123 lks. dist., mkd. L 5, B T.

A cedar, 6 ins. diam., bears S.62°15'E., 208 lks. dist., mkd. L 12 S 4 B T.

A cedar, 6 ins. diam., bears N.42°00'W., 166 lks. dist., mkd. L 8 S 5 B T.

These trees are too scrubby to permit the full marking, and there is no suitable bearing tree available in lot 9, sec. 5.

From this cor., continue gradual descent of 10 ft., over NE. slope.

83.30 Wash, 8 lks. wide, 1 ft. deep, in the bottom of draw, drains E. about 1 ch. dist., thence northeasterly; asc. gradual SE. slope 15 ft.

92.30 Top of ascent, bears NW. and SE.; desc. gradual NE. slope 35 ft.

104.30 Wash, 10 lks. wide, 1 ft. deep, in the bottom of draw, drains N.80°E. about 1 ch. dist., thence northeasterly; asc. gradual SE. slope 5 ft.

108.00 Top of ascent, bears NE. and SW.; desc. gradual NW. slope 10 ft. to

110.60 Intersect the S. bdy. of sec. 33, T. 6 S., R. 24 E., east 9.06 chs. dist. from the cor. of secs. 32 and 33, which is an iron post, 2 ins. diam., extending 9 ins. above ground, firmly set, marked, and witnessed as described in the official record of the survey of T. 6 S., R. 24 E.; and at the point of intersection, set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for closing cor. of secs. 4 and 5, T. 7 S., with brass cap mkd.

T6SR24E

S33

S5|S4

T7SR24E

CC

1936

from which

A cedar, 16 ins. diam., bears S.85°55'E., 174½ lks. dist., mkd. T 7 S R 24 E S 4 C C B T.

A cedar limb, 6 ins. diam., bears S.66°15'W., 316 lks. dist., mkd. T 7 S R 24 E S 5 C C B T.

Land, rolling, rough, and broken bad lands, with outcroppings of red, yellow, and light colored sandstone formation; general drainage to the NW., S. 69.80 chs.; N. 40.80 chs. drain to the NE.

SUBDIVISION OF T. 7 S., R. 24 E.

Chains

Soil, red sand, sandy loam, or red sandy clay, about 1 to 3 ft. deep on tops and slopes and about 3 to 10 ft. deep in bottoms, and lying on a brown, yellow, or light colored clay subsoil or on bedrock, 1st. to 4th. rate. Alternate layers of varied colored clays and sandstone on portions of mile, 4th. rate.

Timber, varies from a scattering to a medium heavy growth of cedar.

Undergrowth, black sagebrush, shadscale, and cotton brush; scattering to a medium dense growth of gramma grass.

Poor to fair fall and winter grazing land.

From the cor. of secs. 5, 6, 31, and 32, on the S. bdy. of the Tp., which is an iron post, 2 ins. diam., extending 9 ins. above ground, firmly set, marked, and witnessed as described in the official record of the survey of T. 8 S., R. 24 E.,

N.0°04'W., bet. secs. 31 and 32.

Over gently rolling top of bench, through dense short undergrowth; desc. gradual general NW. slope 30 ft. to

14.40 Draw, heads SE. about 6 chs. dist., drains NW.; gradual ascent of 10 ft.

15.00 Enter a scattering growth of timber.

19.10 Spur, from E., projects NW. approximately 20 chs. dist.; desc. gradual general NW. slope 40 ft. to

40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

S31 | S32

1936

from which

A cedar limb, 7 ins. diam., bears S.24°30'E., 59 $\frac{1}{2}$ lks. dist., mkd. $\frac{1}{4}$ S 32 E T.

A cedar, 9 ins. diam., bears S.84°30'W., 46 lks. dist., mkd. $\frac{1}{4}$ S 31 E T.

41.00 Leave dense undergrowth, bears NE. and SW., and enter scattering.

41.10 Leave top of bench, bears N.60°E. and S.60°W.; enter rolling, rough, and broken bad lands; 10 ft. below $\frac{1}{4}$ sec. cor.; desc. NW. slope 85 ft.

49.30 Gulch, drains SW.; asc. general SE. slope 165 ft., across the head of draw.

58.10 Head of the draw, drains southwesterly.

66.60 Spur, slopes S.70°W. approximately 20 chs. dist.; desc. 15 ft.

71.40 Draw, drains S.70°W.; asc. SE. slope 35 ft.

SUBDIVISION OF T. 7 S., R. 24 E.

Chains

- 79.80 Spur, from NE., projects NW.; desc. N. slope 5 ft. to
 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the
 ground, for cor. of secs. 29, 30, 31, and 32, with brass
 cap and.

| | |
|------|------|
| T7S | R24E |
| S30 | S29 |
| S31 | S32 |
| 1936 | |

raise a mound
 of stone, 3 ft. base, 2 ft. high, W. of cor.

Land, gently rolling top of bench, S.41.10 chs.; rolling,
 rough, and broken bad lands, N. 38.90 chs.; outcroppings
 and large boulders of gray, yellow, and light colored
 sandstone and shale; general drainage SW.

Soil, red sand, sandy loam, or red sandy clay, about 1 to
 3 ft. deep on tops and slopes and about 3 to 10 ft. deep
 in bottoms, and lying on a brown, yellow, or white chalky
 clay subsoil or on bedrock, 1st. to 4th. rate. Alternate
 layers of red sand, varied colored clays, sandstone, and
 shale on portions of bad lands, 4th. rate.

Timber, cedar.

Undergrowth, black sagebrush and shadscale; sparse to
 scattering growth of gramma and bunch grass.

Fall and winter grazing land, fair on top of bench, poor
 on bad lands.

S.29°58'E., on a random line bet. secs. 29 and 32.

- 40.00 Set temp. 1/4 sec. cor.
 50.10 Intersect N. and S. line, at the cor. of secs. 28, 29, 32,
 and 33.

Thence,

N.39°58'W., on a true line bet. secs. 29 and 32.

Asc. gradual general NW. slope 5 ft., through scattering
 timber and undergrowth.

- 1.70 Top of ascent on NW. slope; desc. 15 ft.
 3.00 Wash, 10 lks. wide, 1 ft. deep, in the bottom of draw,
 drains NW.; asc. 20 ft.
 1.70 Spur, from S.30°E., projects N.30°W. about 5 chs. dist.,
 thence southwesterly; continue gradual ascent of 10 ft.,
 along general S. slope.
 10.80 Same spur as noted at 10.70 chs., slopes SW. approximately
 5 chs. dist.; desc. NW. slope 80 ft.
 13.50 Wash, 50 lks. wide, 10 ft. deep, in the bottom of draw,
 drains SW.; asc. general E. slope 55 ft.
 25.00 Spur, slopes S. about 3 chs. dist.; gradual descent of 10
 ft.
 23.00 Wash, 15 lks. wide, 3 ft. deep, in the bottom of draw,

SUBDIVISION OF T. 7 S., R. 24 E.

Chains

- drains S.10°E.; asc. gradual general E. slope 25 ft. to $\frac{1}{4}$ sec. cor.
 - 34.90 Wash, 10 lks. wide, 1 ft. deep, drains S.20°E.
 - 40.05 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.
- $$\frac{S29}{\frac{1}{4}} = \frac{S32}{1936}$$
- from which
- A cedar, 6 ins. diam., bears N.1°00'E., 236 lks. dist., mkd. B T.
 - A cedar, 12 ins. diam., bears S.13°45'E., 143 lks. dist., mkd. $\frac{1}{4}$ S 32 B T: /
 - The bearing tree in sec. 29 is too scrubby to permit the full marking.
 - 42.40 Spur, 5 ft. above $\frac{1}{4}$ sec. cor., slopes S.30°W. approximately 8 chs. dist.; gradual descent of 10 ft.
 - 47.40 Wash, 10 lks. wide, 1 ft. deep, in the bottom of draw, drains S.; asc. gradual E. slope 10 ft. to
 - 52.30 E. edge of bench, bears NE: about 2 chs. dist., thence westerly, and SW. approximately 5 chs. dist., thence westerly; leave timber; over level top to
 - 60:00 W. edge of bench, bears N.60°E. about 2 chs. dist., thence easterly, and SW. approximately 5 chs. dist., thence easterly; enter scattering timber; desc. gradually 20 ft., along top of spur, projecting W. from bench, to
 - 76.60 Leave top of spur, projects S.80°W.; gradual descent of 15 ft., along N. slope to
 - 80.10 The cor. of secs. 29, 30, 31, and 32.
- Land, rolling, rough, and broken bad lands; draining generally to the SW.; outcroppings of shale and gray, yellow, and light colored sandstone formation.
- Soil, red sand and red sandy clay, about 6 ins. to 3 ft. deep on tops and slopes and about 3 to 10 ft. deep in bottoms, and lying on varied colored clay subsoils or on bedrock, 2nd. to 4th. rate. Alternate layers of red sand, varied colored clays, sandstone, and shale on portions of mile, 4th. rate.
- Timber; cedar.
- Undergrowth, black sagebrush, shadscale, cotton brush, salt brush, and greasewood; sparse to scattering growth of gramma grass and bunch grass.
- Poor to fair fall and winter grazing land.
-
- N.89°58'W., on a random line bet. secs. 30 and 31.
- 40.00 Set temp. $\frac{1}{4}$ sec, cor.

SUBDIVISION OF T. 7 S., R. 24 E.

Chains

- 77.95 Intersect the W. bdy. of the Tp., 4 lks. S. of the cor. of secs. 25, 30, 31, and 36, hereinbefore described.
- Thence;
- S.89°56'E., on a true line bet. secs. 30 and 31.
- Desc. general SE. slope 220 ft., over small draws and spurs, putting to the NE. and SE., through scattering timber and dense undergrowth.
- 3.00 Enter a medium heavy growth of timber, bears N. and S.; undergrowth becomes scattering.
- 28.90 Leave medium heavy growth of timber, bears NW. and SE., and enter scattering.
- 31.00 Draw, drains NE.; asc. NW. slope 25 ft. to
- 32.79 On top of spur, projecting NE. about 3 chs. dist., set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for witness $\frac{1}{4}$ sec. cor., with brass cap mkd.
- $$\frac{S30.W}{\frac{1}{4}} = \frac{S31.C}{1936}$$
- raise a mound
- of stone, 4 ft. base, $2\frac{1}{2}$ ft. high, N. of cor.
- From this cor., desc. SE. slope 50 ft. to
- 37.95 True point for $\frac{1}{4}$ sec. cor. falls on W. bank of wash, making the establishment of a cor. monument impracticable; the wash, which is 60 lks. wide, 10 ft. deep, lies in the bottom of a gulch, draining from N.10°E. to S.30°E. about 15 chs. dist., thence S.15°W.
- From the E. bank of the wash, asc. general W. slope 150 ft., over small draws and spurs, putting W., SW., and NW.
- 75.00 Spur, from SE., projects S.70°W. approximately 30 chs. dist.; desc. gradually 5 ft., along general N. slope to
- 77.95 The cor. of secs. 29, 30, 31, and 32.
- Land, rolling, rough, and broken bad lands, draining generally to the SW.; outcroppings of shale and red, gray, yellow, and light colored sandstone formation.
- Soil, red sand and sandy loam, or red sandy clay, varying in depth from about 6 ins. to 3 ft. on tops and slopes and about 3 to 15 ft. in bottoms, and lying on varied colored clay subsoils or on bedrock, 1st. to 4th. rate. Alternate layers of red sand, varied colored clays, shale, and sandstone on portions of mile, 4th. rate.
- Timber, cedar.
- Undergrowth, black sagebrush, shadscale, and cotton brush; a sparse to a fair growth of gramma and bunch grass.
- Poor to fair fall and winter grazing land.

N.0°04'W., bet. secs. 29 and 30.


Desc. abrupt general N. slope, through scattering timber

SUBDIVISION OF T. 7 S., R. 24 E.

Chains

and undergrowth.

- 9.00 Draw, 85 ft. below sec. cor., drains S.80°W.; asc. SE. slope 65 ft.
- 14.10 Spur, projects S.70°W. approximately 20 chs. dist.; desc. 30 ft.
- 15.50 Wash, 15 lks. wide, 5 ft. deep, in the bottom of draw, drains S.60°W.; abrupt ascent of 70 ft.
- 18.70 Spur, projects S.70°W. about 15 chs. dist.; desc. 70 ft.
- 26.80 Wash, 20 lks. wide, 4 ft. deep, in the bottom of draw, drains S.80°W. about 2 chs. dist., thence southwesterly; asc. abrupt SW, slope 115 ft. to
- 33.50 S. edge of bench, bears NW. and SE.; asc. gradually 15 ft. over nearly level top to
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.




from which

A cedar, 8 ins. diam., bears N.50°45'E., 270 lks. dist., mkd. $\frac{1}{4}$ S 29 B T.

A cedar, 8 ins. diam., bears N.16°00'W., 260 lks. dist., mkd. $\frac{1}{4}$ S 30 B T.

- 42.50 N. edge of bench, 5 ft. above $\frac{1}{4}$ sec. cor., bears E. about 4 chs. dist., thence northeasterly, and W. approximately 2 chs. dist., thence southwesterly; desc. gradual NW. slope 10 ft.
- 46.50 Wash, 10 lks. wide, 1 ft. deep, in the bottom of draw, near head, drains S.60°W.; asc. gradual S. slope 15 ft.
- 52.20 Top of ascent, bears E. and W.; enter medium dense undergrowth, bears same as top of ascent; desc. gradual NW. slope 20 ft.
- 62.70 Wash, 20 lks. wide, 2 ft. deep, in the bottom of draw, drains S.60°W.; asc. gradual SE. slope 35 ft. to sec. cor.
- 71.50 Wash, 10 lks. wide, 2 ft. deep, drains S.60°W.
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 19, 20, 29, and 30, with brass cap mkd.



from which

A cedar, 9 ins. diam., bears N.8°00'E., 227 lks. dist., mkd. S 20 B T.

A cedar, 7 ins. diam., bears S.54°45'E., 296 lks. dist., mkd. S 29 B T.

SUBDIVISION OF T. 7 S., R. 24 E.

Chains

chain

A cedar, 12 ins. diam., bears N.26°00'W., 197 lks. dist., mkd. T 7 S R 24 E S 19 B T.

The bearing trees in secs. 20 and 29 are too scrubby to permit the full marking, and there is no suitable tree available in sec. 30.

Land, rolling, rough, and broken bad lands, S. 33.50 chs. and N.37.50 chs.; nearly level top of bench, remainder of mile; outcroppings of shale and red, gray, yellow, and light colored sandstone formation; general drainage to the SW.

Soil, red sand and sandy loam, or red sandy clay, varying in depth from about 6 ins. to 3 ft. on tops and slopes and about 3 to 10 ft. in bottoms, and lying on varied colored clay subsoils or on bedrock, 1st. to 4th. rate. Alternate layers of red sand, varied colored clays, shale, and sandstone on portions of mile, 4th. rate.

Timber, cedar.

Undergrowth, black sagebrush, shadscale, and cotton brush; a sparse to a fair growth of gramma and bunch grass.

Poor to fair fall and winter grazing land.

S.89°58'E., on a random line bet. secs. 20 and 29.

40.00 Set temp. 1/4 sec. cor.

80.12 Intersect N. and S. line, at the cor. of secs. 20, 21, 28, and 29.

Thence,


N.89°58'W., on a true line bet. secs. 20 and 29.

Over rolling top of bench, through medium dense timber and undergrowth; asc. gradually 20 ft.

16.10 Top of ascent, bears N.10°W. and S.10°E.; desc. gradually 30 ft. to 1/4 sec. cor., over general W. slope.

28.30 Wash, 10 lks. wide, 2 ft. deep, drains S.20°W. about 5 chs. dist., thence southwesterly.

40.06 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/4 sec. cor., with brass cap mkd.



from which

A cedar, 12 ins. diam., bears N.60°15'E., 345 lks. dist., mkd. 1/4 S 20 B T.

A cedar, 14 ins. diam., bears S.87°30'E., 385 lks. dist., mkd. 1/4 S 29 B T.

From this cor., continue gradual descent of 35 ft., over general W. slope to

SUBDIVISION OF T. 7 S., R. 24 E.

Chains

60.30 Leave top of bench, bears N.10°E. and S.10°W.; enter rolling, rough, and broken bad lands; desc. gradual NW. slope 15 ft.

63.50 Wash, 10 lks. wide, 3 ft. deep, in the bottom of draw, drains S. about 3 chs. dist., thence southwesterly; asc. gradual SE. slope 10 ft. to sec. cor.

77.30 Wash, 10 lks. wide, 1 ft. deep, drains SW.

80.12 The cor. of secs. 19, 20, 29, and 30.

Land, rolling and gently rolling top of bench, E. 60.30 chs.; rolling, rough, and broken bad lands, W. 19.82 chs.; outcroppings of shale and red, yellow, and light colored sandstone formation; general drainage to the SW.

Soil, red sand and red sandy clay loam, about 1 to 3 ft. deep, lying on yellow sand, or on a brown, yellow, or white chalky clay subsoil, or on bedrock, 1st. to 3rd. rate, on bench; red sand and red sandy clay, about 6 ins. to 3 ft. deep, lying on varied colored clay subsoils or on bedrock, 3rd. and 4th. rate, on bad lands.

Timber, cedar.

Undergrowth, black sagebrush, shadscale, and cotton brush; gramma grass, scattering to medium dense on top of bench, sparse growth on bad lands.

Fall and winter grazing land, fair on bench, poor on bad lands.

N.39°56'W., on a random line bet. secs. 19 and 30.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

77.38 Intersect the W. bdy. of the Tp., at the cor. of secs. 19, 24, 25, and 30, hereinbefore described.

Thence,

S.39°56'E., on a true line bet. secs. 19 and 30.

Desc. gradual NE. slope 25 ft., through scattering timber and medium dense undergrowth.

17.00 Wash, 10 lks. wide, 1 ft. deep, in the bottom of draw, drains S. about 1 ch. dist., thence southeasterly; asc. gradual W. slope 10 ft.

31.60 Top of ascent, bears N. and S.; desc. gentle E. slope 15 ft. to

37.88 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

S19

S30

1936

from which

A cedar, 6 ins. diam., bears S.50°45'W., 104 lks. dist., mkd. $\frac{1}{4}$ S 30 B T.

SUBDIVISION OF T. 7 S., R. 24 E.

Chains

A cedar, 8 ins. diam., bears N.53°15'W., 22
lks. dist., mkd. $\frac{1}{4}$ S 19 B T.

From this cor., desc. more abruptly 95 ft., over E. slope.

46.50 Wash, 25 lks. wide, 2 ft. deep, in the bottom of hollow,
drains S. about 1 ch. dist., thence southeasterly; asc.
general SW. slope 180 ft.

73.90 Top of ascent on SW. slope; desc. gradually 5 ft. to

77.88 The cor. of secs. 19, 20, 29, and 30.

Land, rolling, rough, and broken bad lands, draining
generally to the SW.; outcroppings of shale and red, gray,
yellow, and light colored sandstone formation.

Soil, red sand and sandy loam, or red sandy clay, varying
in depth from about 6 ins. to 3 ft. on tops and slopes
and about 3 to 15 ft. in bottoms, and lying on varied
colored clay subsoils or on bedrock, 1st. to 4th. rate.
Alternate layers of red sand, varied colored clays, shale,
and sandstone on portions of mile, 4th. rate.

Timber, cedar.

Undergrowth, scattering to medium dense black sagebrush,
shadscale, cotton brush, salt brush, and greasewood; a
sparse to a fair growth of gramma and bunch grass.

Poor to fair fall and winter grazing land.

N.0°04'W., bet. secs. 19 and 20.

Asc. gradual SE. slope 25 ft., through medium dense timber
and scattering undergrowth:

9.30 Top of ascent, bears NE. and SW.; desc. gradual NW. slope
15 ft.

13.30 Wash, 10 lks. wide, 1 ft. deep, in the bottom of draw,
drains S.60°W.; asc. gradual SE. slope 25 ft.

23.00 S. edge of bench, bears E. about 5 chs. dist., thence
southeasterly, and W. approximately 1 ch. dist., thence
northeasterly; leave timber, bears E. and W.; over nearly
level top to

27.60 N. edge of bench, bears E. about 10 chs. dist., thence
southeasterly, and SW.; desc. NW. slope 70 ft.

28.00 Enter a medium heavy growth of timber, bears E. and SW.

39.60 Wash, 20 lks. wide, 1 ft. deep, in the bottom of draw,
drains S.20°W.; about 3 chs. dist., thence westerly; asc.
SE. slope 10 ft. to

40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the
ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

S19 | S20

1936

from which

SUBDIVISION OF T. 7 S., R. 24 E.

Chains

- A cedar, 3 ins. diam., bears N.89°30'E., 63 lks. dist., mkd. B T.
- A cedar, 5 ins. diam., bears S.8°30'W., 72 lks. dist., mkd. $\frac{1}{4}$ S 19 B T.
- 45.00 Spur, 75 ft. above $\frac{1}{4}$ sec. cor., projects S.70°W. approximately 20 chs. dist.; gradual descent of 10 ft.
- 48.20 Wash, 10 lks. wide, 1 ft. deep, in the bottom of draw, drains S.70°W.; asc. gradual S. slope 10 ft.
- 50.10 Spur, slopes W. about 1 ch. dist., thence northerly; gradual descent of 10 ft.
- 55.30 Wash, 10 lks. wide, 1 ft. deep, in the bottom of draw, drains W.; asc. gradually 10 ft.
- 59.00 Spur, slopes W. approximately 4 chs. dist.; gradual descent of 45 ft.
- 72.60 Wash, 15 lks. wide, 3 ft. deep, in the bottom of draw, drains N.70°W. about 2 chs. dist., thence westerly; asc. gradually 10 ft.
- 76.20 Top of ascent, bears NE. and S^W.; desc. gradual NW. slope 10 ft. to
- 80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 17, 18, 19, and 20, with brass cap mkd.

| | |
|------|------|
| T7S | R24E |
| S18 | S17 |
| S19 | S20 |
| 1936 | |

from which

A cedar, 10 ins. diam., bears N.62°30'E., 358 lks. dist., mkd. T 7 S R 24 E S 17 B T.

There are no suitable bearing trees available in secs. 18, 19, and 20; therefore, I raise a mound of stone, 4 ft. base, 3 ft. high, W. of cor.

Land, rolling, rough, and broken bad lands, draining generally to the S^W.; shale and red, gray, yellow, and light colored sandstone formation.

Soil, red sand and sandy loam, or red sandy clay, varying in depth from about 6 ins. to 3 ft. on tops and slopes and about 3 to 15 ft. in bottoms, and lying on varied colored clay subsoils or on bedrock, 1st. to 4th. rate.

Timber, cedar.

Undergrowth, scattering to medium dense black sagebrush, shadscale, cotton brush, salt brush, and greasewood; a sparse to a fair growth of gramma and bunch grass.

Poor to fair fall and winter grazing land.

S.89°58'E.; on a random line bet. secs. 17 and 20.

- 40.00 Set temp. $\frac{1}{4}$ sec. cor.

SUBDIVISION OF T. 7 S., R. 24 E.

Chains

80.18 Intersect N. and S. line, at the cor. of secs. 16, 17, 20, and 21.

Thence,

N.89°58'W., on a true line bet. secs. 17 and 20.

Over gently rolling top of bench, through medium dense undergrowth; desc. gradually 50 ft. to $\frac{1}{4}$ sec. cor., along NW. slope.

40.09 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

S17
S20
1936

raise a mound of stone, 4 ft. base, 3 ft. high, N. of cor.

52.10 Leave top of bench, 15 ft. below $\frac{1}{4}$ sec. cor., bears N.30°W. and S.30°E.; enter rolling and broken bad lands; desc. gradual general NW. slope 90 ft. to sec. cor., through scattering timber.

73.80 Wash, 15 lks. wide, 1 ft. deep, heads SE. about 5 chs. dist., drains N.60°W.

80.18 The cor. of secs. 17, 18, 19, and 20.

Land, gently rolling top of bench, E. 52.10 chs.; rolling and broken bad lands, W. 28.08 chs.; shale, and red, yellow, and light colored sandstone formation; drainage NW., thence generally to the SW.

Soil, red sand and red sandy clay loam, about 1 to 3 ft. deep, lying on yellow sand, or on a brown, yellow, or white chalky clay subsoil, or on bedrock, 1st. to 3rd. rate, on bench; red sand and red sandy clay, about 6 ins. to 3 ft. deep, lying on varied colored clay subsoils or on bedrock, 3rd. and 4th. rate, on bad lands.

Timber, cedar.

Undergrowth, black sagebrush, shadscale, and cotton brush; gramma grass, scattering to medium dense on top of bench, sparse growth on bad lands.

Fall and winter grazing land, fair on bench, poor on bad lands.

N.89°56'W., on a random line bet. secs. 18 and 19.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

77.80 Intersect the W. bdy. of the Tp., 11 lks. S. of the cor. of secs. 13, 18, 19, and 24, hereinbefore described.

Thence,

S.89°51'E., on a true line bet. secs. 18 and 19.

Desc. gradual NE. slope 45 ft., through medium heavy

SUBDIVISION OF T. 7 S., R. 24 E.

Chains

timber and scattering undergrowth.

15.00 Draw, drains S.10°E. about 6 chs. dist., thence southeasterly; asc. gradual SW. slope 30 ft.

28.60 Spur, projects S.70°E. approximately 10 chs. dist., thence N.80°E.; desc. gradual NE, slope 35 ft. to

37.80 In the bottom of a shallow draw, which heads SW. about 4 chs. dist. and drains N.10°E. approximately 7 chs. dist., thence N.70°E., set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

S18

$\frac{1}{4}$ S19.

1936

from which

A cedar, 3 ins. diam., bears N.39°30'E., $71\frac{1}{2}$ lks. dist., mkd. B.T.

A cedar, 3 ins. diam., bears S.12°00'E., 190 lks. dist., mkd. B T.

48.10 Spur, 15 ft. above $\frac{1}{4}$ sec. cor., slopes N. about 6 chs. dist.; desc. abruptly 60 ft.

59.80 Wash, 120 lks. wide, 5 ft. deep, drains S.80°E.

61.70 Wash, 70 lks. wide, 10 ft. deep, in the bottom of hollow, drains S.30°E. approximately 10 chs. dist., thence southwesterly; asc. general W. slope 50 ft.

70.20 Spur, slopes S. about 8 chs. dist.; desc. 35 ft.

76.70 Wash, 150 lks. wide, 15 ft. deep, in the bottom of draw, drains SW.; asc. gradual NW. slope 5 ft. to

77.80 The cor. of secs. 17, 18, 19, and 20.

Land, rolling and broken bad lands, draining SE., S., and SW. into a main wash, thence generally to the S.; yellow and light colored sandstone formation.

Soil, red sand and sandy loam, or red sandy clay, varying in depth from about 6 ins. to 3 ft. on tops and slopes and about 3 to 10 ft. in bottoms, and lying on varied colored clay subsoils or on bedrock, 1st. to 4th. rate.

Timber, scattering to a medium heavy growth of cedar.

Undergrowth, scattering to medium dense black sagebrush, shadscale, cotton brush, white sagebrush, greasewood, and salt brush; sparse to medium dense growth of gramma grass.

Poor to fair fall and winter grazing land.

N.0°04'W., bet. secs. 17 and 18.

Desc. NW. slope 15 ft., through scattering timber and undergrowth.

0.60 Wash, 120 lks. wide, 10 ft. deep, in the bottom of draw,


SUBDIVISION OF T. 7 S., R. 24 E.

Chains

drains SW.; asc. gradually 110 ft., along SE. slope.

28.00 Spur, projects SW. approximately 10 chs. dist., thence S.; asc. gradually 10 ft. to $\frac{1}{4}$ sec. cor., across the head of draw, draining SW.

40.00 On a SE. slope, set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.



from which

A cedar, 7 ins. diam., bears N.45°00'E., 105 lks. dist., mkd. $\frac{1}{4}$ S 17 B T.

A cedar, 7 ins. diam., bears N.47°30'W., 85 lks. dist., mkd. $\frac{1}{4}$ S 18 B T.

43.20 Spur, 20 ft. above $\frac{1}{4}$ sec. cor., projects S.80°W. about 6 chs. dist.; asc. gradually 45 ft., across the head of draw...

52.00 Head of the draw, drains SW.; leave timber.

58.70 Enter a medium heavy growth of timber, bears E. and W.


61.70 Leave rolling and broken bad lands, bears N.30°E. and S.80°W.; enter bench; desc. gradual NW. slope 5 ft., over gently rolling top.

67.20 Wash, 10 lks. wide, 1 ft. deep, in the bottom of draw, drains S.70°W. about 5 chs. dist., thence S.10°W.; asc. gradual general S. slope 20 ft.

72.50 Wagon road, bears N.30°E. to U. S. Highway No. 40 and S.85°W. to Watson, Utah.

77.90 Leave top of bench, bears N.80°E. and N.80°W.; enter rolling and broken bad lands; leave medium heavy growth of timber, bears E. and W., and enter scattering; desc. gradual NW. slope 15 ft. to

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 7, 8, 17, and 18, with brass cap mkd.



from which

A cedar, 5 ins. diam., bears N.57°00'E., 356 lks. dist., mkd. B T.

A cedar, 12 ins. diam., bears S.86°15'E., 465 lks. dist., mkd. S 17 B T.

A cedar, 5 ins. diam., bears N.51°45'W., 232 lks. dist., mkd. S 7 B.T.

These trees are too scrubby to permit the full marking, and there is no suitable bearing tree available in sec. 18; therefore, I raise a mound of stone, 4 ft. base, 3 ft. high, W. of cor.

SUBDIVISION OF T. 7 S., R. 24 E.

Chains

Land, rolling and broken bad lands, S. 61.70 chs. and N. 2.10 chs.; gently rolling top of bench, remainder of mile; red, yellow, and light colored sandstone formation; drainage SW., S. 77.90 chs.; N. 2.10 chs. drain NE., thence generally to the N.

Soil, red sand and red sandy clay, about 6 ins. to 3 ft. deep, lying on varied colored clay subsoils, or on bedrock, 3rd. and 4th. rate, on bad lands; red sand and red sandy clay loam, about 1 to 3 ft. deep, lying on yellow sand, or on a brown, yellow, or white chalky clay subsoil, or on bedrock, 1st. to 3rd. rate, on bench.

Timber, cedar.

Undergrowth, black sagebrush, shadscale, cotton brush, salt brush, and greasewood; gramma grass, scattering to medium dense on top of bench, sparse growth on bad lands.

Fall and winter grazing land, fair on bench, poor on bad lands.

S. 89° 58' E., on a random line bet. secs. 8 and 17.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.20 Intersect N. and S. line, 5 lks. N. of the cor. of secs. 8, 9, 16, and 17.

Thence,

N. 89° 56' W., on a true line bet. secs. 8 and 17.

Over gently rolling top of bench, through medium dense undergrowth; desc. gradually 15 ft. to $\frac{1}{4}$ sec. cor., along S. slope.

40.10 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

S8

$\frac{1}{4}$

S17

1936

from which

A cedar, 14 ins. diam., bears S. 87° 30' E., 503 lks. dist., mkd. $\frac{1}{4}$ S 17 B T.

There are no trees available in sec. 8; therefore, I raise a mound of stone, 4 ft. base, 4 ft. high, N. of cor.

58.30 Wagon road, bears N. 70° E. to U. S. Highway No. 40 and S. 50° W. to Watson, Utah.

61.60 Leave top of bench, 10 ft. below $\frac{1}{4}$ sec. cor., bears N. 30° E. and S. 30° W.; enter rolling and broken bad lands; leave medium dense undergrowth, bears NE. and SW., and enter scattering; desc. gradual general NW. slope 35 ft. to sec. cor., through a sparse growth of timber.

80.20 The cor. of secs. 7, 8, 17, and 18.

Land, gently rolling top of bench, draining generally to the SW., E. 61.60 chs.; rolling and broken bad lands,

SUBDIVISION OF T. 7 S., R. 24 E.

Chains

draining generally to the N., N. 18.60 chs.; red, yellow, and light colored sandstone formation.

Soil, red sand and red sandy clay loam, about 1 to 3 ft. deep, lying on yellow sand, or on a brown, yellow, or white chalky clay subsoil, or on bedrock, 1st. to 3rd. rate, on bench; red sand and red sandy clay, about 6 ins. to 3 ft. deep, lying on varied colored clay subsoils or on bedrock, 3rd. and 4th. rate, on bad lands.

Timber, cedar.

Undergrowth, black sagebrush, shadscale, cotton brush, and salt brush; gramma grass, scattering to medium dense on top of bench, sparse growth on bad lands.

Fall and winter grazing land, fair on bench, poor on bad lands.

N.89°51'W., on a random line bet. secs. 7 and 18.

40.00 Set temp. 1/4 sec. cor.

77.78 Intersect the W. bdy. of the Tp., 7 lks. S. of the cor. of secs. 7, 12, 13, and 18; hereinbefore described.

Thence,

S.89°48'E., on a true line bet. secs. 7 and 18.

Over rolling, rough, and broken bad lands, through scattering timber and undergrowth; desc. 30 ft. across the head of draw, draining northwesterly.

13.50 Spur, projects N.25°W.; desc. NE. slope 25 ft.

18.50 Enter a heavy growth of timber, bears NW. and SE.

26.80 Wash, 10 lks. wide, 1 ft. deep, in the bottom of draw, heads N.60°E. about 10 chs. dist., drains S. approximately 1 ch. dist., thence southeasterly; asc. NW. slope 30 ft.

31.10 Top of ascent, bears N.10°E. and S.10°W.; desc. SE. slope 20 ft. to

37.48 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for witness 1/4 sec. cor., with brass cap mkd.

S7
1/4 WC
S18
1936

from which

A cedar, 8 ins. diam., bears S.21°30'E., 99 lks. dist., mkd. W C 1/4 S 18 B T.

A cedar, 10 ins. diam., bears N.28°15'W., 143 lks. dist., mkd. W C B T.

The bearing tree in sec. 7 is too scrubby to permit the full marking.

37.78 True point for 1/4 sec. cor. falls in the bottom of wash, making the establishment of a cor. monument impracticable;

SUBDIVISION OF T. 7 S., R. 24 E.

Chains

the wash, which is 15 lks. wide, 1 ft. deep, lies in the bottom of a draw, 5 ft. below witness $\frac{1}{4}$ sec. cor., and heads N. about 5 chs. dist. and drains southeasterly.

41.60 Spur, 15 ft. above true point for $\frac{1}{4}$ sec. cor., slopes SE. about 1 ch. dist.; desc. NE: slope 35 ft.

46.90 Wash, 15 lks. wide, 1 ft. deep, in the bottom of draw, heads N.20°E. approximately 5 chs. dist. and drains S.20°W.; gradual ascent of 20 ft.

63.10 Top of ascent; bears N.10°E. and S.10°W.; desc. gradually 40 ft.; along general NW. slope to

77.78 The cor. of secs. 7, 8, 17, and 18.

Land, rolling, rough, and broken bad lands; outcroppings of red, yellow, and light colored sandstone formation; drainage to the SE., W. 63.10 chs.; E. 14.68 chs. drain NE.

Soil, red sand, sandy loam, or red sandy clay, about 1 to 3 ft. deep on tops and slopes and about 3 to 10 ft. deep in bottoms, and lying on a brown, yellow, or light colored clay subsoil or on bedrock, 1st. to 4th. rate. Alternate layers of red sand, varied colored clays, and sandstone on portions of mile, 4th. rate.

Timber, cedar.

Undergrowth, black sagebrush, shadscale, cotton brush, salt brush, and greasewood; sparse to scattering growth of gramma and bunch grass.

Poor to fair fall and winter grazing land.

N.0°04'W., bet. secs. 7 and 8.

Desc. abrupt rough NW. slope 80 ft., through scattering timber and undergrowth.

8.60 Wash, 15 lks. wide, 2 ft. deep, in the bottom of draw, heads S.10°W. about 5 chs. dist. and drains N.10°E. approximately 5 chs. dist., thence northeasterly; asc. SE. slope 20 ft.

17.70 Spur, slopes N.70°E. about 6 chs. dist.; desc. NW. slope 55 ft.

24.60 Wash, 10 lks. wide, 1 ft. deep, in the bottom of draw, drains N.60°E. approximately 10 chs. dist., thence northerly; gradual ascent of 35 ft.

32.60 Top of ascent, bears NE. and SW.; desc. gradual NW. slope 20 ft. to

40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$\frac{1}{4}$
S7 | S8

1936

from which

SUBDIVISION OF T. 7 S., R. 24 E.

Chains

A cedar, 6 ins. diam., bears N.65°30'E., 128 lks. dist., mkd. $\frac{1}{4}$ S 8 B T. ✓

A cedar, 8 ins. diam., bears N.49°45'W., 75 lks. dist., mkd. B T.

The bearing tree in sec. 7 is too scrubby to permit the full marking.

49.20 Wash, 10 lks. wide, 2 ft. deep, in the bottom of draw, 60 ft. below $\frac{1}{4}$ sec. cor., heads S.70°W. approximately 10 chs. dist., drains E. about 5 chs. dist., thence northerly; asc. SE. slope 25 ft.

51.40 Spur, from S.60°W., at forks, one prong slopes N.60°E. approximately 8 chs. dist., and one prong projects N.; gradual descent of 75 ft., along top to

69.40 Leave top of spur, projects N.15°E.; desc. 50 ft., along NW. slope to

80.00 Set an iron post, 3 ft. long, 2 ins. diam.; 27 ins. in the ground, for cor. of secs. 5, 6, 7, and 8, with brass cap mkd.

| | |
|------|------|
| T7S | R24E |
| S6 | S5 |
| S7 | S8 |
| 1936 | |

from which

A cedar, 10 ins. diam., bears S.27°00'E., 173 lks. dist., mkd. B T.

A cedar, 12 ins. diam., bears N.57°15'W., 149 lks. dist., mkd. B T.

These trees are too scrubby to permit the full marking, and there are no suitable bearing trees available in secs. 5 and 7; therefore, I raised a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

Land, rolling, rough, and broken bad lands, draining generally to the N.; outcroppings of shale and red, yellow, and light colored sandstone formation.

Soil, red sand, sandy loam; or red sandy clay, about 1 to 3 ft. deep on tops and slopes and approximately 3 to 6 ft. deep in bottoms, and lying on a brown, yellow, or light colored clay subsoil or on bedrock, 1st. to 4th. rate. Alternate layers of red sand, varied colored clays, shale, and sandstone on portions of mile, 4th. rate.

Timber, cedar.

Undergrowth, black sagebrush, shadscale, cotton brush, salt brush, and greasewood; a sparse to scattering growth of gramma and bunch grass.

Poor to fair winter grazing land.

S.89°56'E., on a random line bet. secs. 5 and 8.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

SUBDIVISION OF T. 7 S., R. 24 E.

Chains

89.28 Intersect N. and S. line, 5 lks. S. of the cor. of secs. 4, 5, 8, and 9.

Thence,

N.89°58'W., on a true line bet. secs. 5 and 8.

Over rolling, rough, and broken bad lands, through scattering timber and undergrowth; desc. SW. slope 55 ft.

1.30 Wash, 15 lks. wide, 2 ft. deep, drains from N.80°E. to N.70°W.

11.90 Wash, 100 lks. wide, 3 ft. deep, in the bottom of draw, drains N.10°E. about 5 chs. dist., thence N.70°W.; asc. SE. slope 55 ft.

18.30 Spur, projects N.70°E. approximately 10 chs. dist.; desc. NW. slope 60 ft.

28.50 Wash, 10. lks. wide, 1 ft. deep, in the bottom of draw, heads S. about 10 chs. dist., drains N.; asc. SE. slope 50 ft.

32.90 Spur, projects N.30°E. about 5 chs. dist., thence NW. approximately 10 chs. dist.; desc. NW. slope 35 ft. to

39.11 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for witness $\frac{1}{4}$ sec. cor., with brass cap mkd.

S5
WC $\frac{1}{4}$

 S8
1936

from which

A cedar, 7 ins. diam., bears S.66°00'E., 131 lks. dist., mkd. W C $\frac{1}{4}$ S 8 B T.

A cedar, 5 ins. diam., bears N.11°00'W., 196 lks. dist., mkd. W C B T.

The bearing tree in sec. 5 is too scrubby to permit the full marking.

40.11 True point for $\frac{1}{4}$ sec. cor. falls in the bottom of wash, making the establishment of a cor. monument impracticable; the wash, which is 10 lks. wide, 1 ft. deep, lies in the bottom of a draw, 5 ft. below witness $\frac{1}{4}$ sec. cor., and drains N.10°W. about 2 chs. dist., thence NW.; asc. NE. slope 40 ft.

44.40 Top of ascent, bears N.25°W. and S.25°E.; desc. SW. slope 170 ft.

52.20 Wash, 10 lks. wide, 1 ft. deep, heads SE. about 5 chs. dist., drains NW.

58.60 Same wash as noted at 52.20 chs., 20 lks. wide, 10 ft. deep, from NE., drains N.80°W.

63.50 Same wash as noted at 58.60 chs., 30 lks. wide, 12 ft. deep, in the bottom of draw, draining from NE. to N.80°W.; asc. NE. slope 60 ft.

68.90 Spur, slopes N.20°W. about 2 chs. dist.; desc. 60 ft.

72.10 Wash, 40 lks. wide, 10 ft. deep, in the bottom of draw, drains N.; asc. abruptly 130 ft.

SUBDIVISION OF T. 7 S., R. 24 E.

Chains

- 76.30 Spur, projects N. approximately 10 chs. dist., thence northwesterly; desc. 25 ft.
- 78.20 Wash, 10 lks. wide, 1 ft. deep, in the bottom of draw, heads S.10°E. about 1 ch. dist. and drains N.10°W.; asc. 25 ft.
- 79.20 Spur, projects N.; desc. W. slope 25 ft. to
- 80.22 The cor. of secs. 5, 6, 7, and 8.

Land, rolling, rough, and broken bad lands, draining to the N. and NW.; outcroppings of shale and red, yellow, and light colored sandstone formation.

Soil, red sand, sandy loam, or red sandy clay, about 1 to 3 ft. deep on tops and slopes and approximately 3 to 10 ft. deep in bottoms, and lying on a brown, yellow, or light colored clay subsoil or on bedrock, 1st. to 4th. rate. Alternate layers of red sand, varied colored clays, shale, and sandstone on portions of mile, 4th. rate.

Timber, cedar.

Undergrowth, black sagebrush, shadscale, cotton brush, salt brush, and greasewood; a sparse to scattering growth of gramma and bunch grass.

Poor to fair winter grazing land.

N.39°43'W., on a random line bet. secs. 6 and 7.

40.20 Set temp. sec. cor.

77.75 Intersect the W. bdy. of the Tp., 2 lks. S. of the cor. of secs. 1, 6, 7, and 12, hereinbefore described.

Thence,

S.39°47'E., on a true line bet. secs. 6 and 7.

Over rolling, rough, and broken bad lands, through scattering timber and undergrowth; asc. abrupt general W. slope 110 ft..

5.40 Spur, from SW., projects N. about 20 chs. dist., thence northeasterly; desc. steep E. slope 155 ft.

11.50 Wash, 25 lks. wide, 1 ft. deep, in the bottom of draw, drains N.20°E.; asc. W. slope 40 ft.

14.10 Spur, slopes N. about 1 ch. dist.; desc. 35 ft.

18.50 Wash, 25 lks. wide, 2 ft. deep, in the bottom of draw, drains N.20°E. approximately 5 chs. dist., thence northwesterly; asc. general W. slope 200 ft.

20.40 Wash, 10 lks. wide, 1 ft. deep, drains SW.

34.50 Top of ascent, bears N.10°E. and S.10°E.; desc. gradual E. slope 10 ft.

38.80 Wash, 10 lks. wide, 1 ft. deep, in the bottom of draw, drains N. about 5 chs. dist., thence N.70°W.; asc. gradual general W. slope 5 ft. to

SUBDIVISION OF T. 7 S., R. 24 E.

Chains

37.75 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

S6
 $\frac{1}{4}$ ——— /
 S7
 1936

from which

A cedar, 6 ins. diam., bears S.3°15'E., 80 lks. dist., mkd. $\frac{1}{4}$ S 7 B T.

A cedar, 16 ins. diam., bears N.25°45'W., 62 lks. dist., mkd. B T.

The bearing tree in sec. 6 is too scrubby to permit the full marking.

42.20 Top of ascent, 20 ft. above $\frac{1}{4}$ sec. cor., bears N.10°E. and S.10°W.; desc. 60 ft.

51.20 Wash, 10 lks. wide, 1 ft. deep, in the bottom of draw, drains NE.; asc. 50 ft.

55.50 Spur, projects N.60°E. about 3 chs. dist., thence N.10°E.; desc. SE. slope 90 ft.

64.10 Wash, 15 lks. wide, 1 ft. deep, in the bottom of draw, drains N.60°E.; asc. 30 ft.

70.00 Spur, slopes NE. approximately 8 chs. dist.; desc. abruptly 85 ft.

73.90 Wash, 20 lks. wide, 2 ft. deep, in the bottom of draw, drains N.10°E.; asc. W. slope 70 ft. to

77.75 The cor. of secs. 5, 6, 7, and 8.

Land, rolling, rough, and broken bad lands, draining generally to the N.; outcroppings of shale and red, yellow, and light colored sandstone formation.

Soil, red sandy clay about 6 ins. to 4 ft. deep, lying on varied colored clay subsoils or on bedrock, 4th. rate. Alternate layers of red sand, varied colored clays, shale, and sandstone on portions of mile, 4th. rate.

Timber, cedar.

Undergrowth, black sagebrush, shadscale, cotton brush, salt brush, and greasewood; a sparse growth of gramma and bunch grass.

Poor to fair winter grazing land.

N.0°04'W., on a true line bet. secs. 5 and 6.

Over rolling, rough, and broken bad lands, through scattering timber and undergrowth; asc. 20 ft., along W. slope.


1.10 Top of ascent, bears N.10°W. and S.10°E.; desc. 10 ft.

1.30 Wash, 10 lks. wide, 1 ft. deep, in the bottom of draw, drains N.10°W.; asc. SW. slope 15 ft.

SUBDIVISION OF T. 7 S., R. 24 E.

Chains

- 4.60 Spur, slopes N.60°W. about 8 chs. dist.; desc. 110 ft.
- 25.10 Wash, 40 lks. wide, 5 ft. deep, in the bottom of draw, drains N.80°E.; asc. SW. slope 60 ft. to
- 40.00 On top of spur, projecting S.60°E. approximately 10 chs. dist., set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.




from which

- A cedar, 3 ins. diam., bears N.77°45'E., 209 lks. dist., mkd. B T.
- A cedar, 3 ins. diam., bears S.38°15'W., 7 lks. dist., mkd. B T.

From this cor., asc. gradually 5 ft. across the head of draw, draining NE.

- 43.70 Spur, projects NE. about 10 chs. dist.; desc. NW. slope 135 ft.
- 63.50 Wash, 15 lks. wide, 1 ft. deep, drains N.60°E.
- 61.20 Wash, 20 lks. wide, 3 ft. deep, in the bottom of hollow, drains W. about 1 ch. dist., thence northeasterly; over level land.
- 65.20 Same wash as noted at 61.20 chs., 30 lks. wide, 3 ft. deep, drains from S.60°W. to N.60°E. approximately 5 chs. dist., thence northwesterly.
- 66.90 Same wash as noted at 65.20 chs., 30 lks. wide, 4 ft. deep, drains from S.80°E. to N.60°W.
- 67.20 Leave level land, bears NW. and SE.; begin ascent of 55 ft. over SW. slope.
- 71.10 Top of ascent, bears N.80°W. and S.80°E.; desc. NE. slope 40 ft.
- 77.40 Wash, 20 lks. wide, 2 ft. deep, in the bottom of draw, drains SW.; asc. abrupt SE. slope 65 ft. to
- 80.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for cor. of lots 5 and 12, sec. 5, and lots 8 and 9, sec. 6, with brass cap mkd.



1936

from which

- A cedar, 6 ins. diam., bears N.86°00'E., 153 lks. dist., mkd. L 5 S 5 B T.
- A cedar, 6 ins. diam., bears S.61°15'E., 110 lks. dist., mkd. L 12 S 5 B T.
- A cedar, 6 ins. diam., bears S.20°00'W., 137 lks. dist., mkd. L 9 S 6 B T.

SUBDIVISION OF T. 7 S., R. 24 E.

Chains

These trees are too scrubby to permit the full marking, and there is no suitable bearing tree available in lot 8, sec. 6; therefore, I raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

- 82.20 Spur, 50 ft. above lot cor., projects S.80°W. about 10 chs. dist.; desc. NW. slope 45 ft.
- 88.70 Wash, 15 lks. wide, 1 ft. deep, in the bottom of draw, drains SW.; asc. abrupt. SE. slope 85 ft.
- 93.60 Spur, projects S.60°W. approximately 20 chs. dist.; desc. steep NW. slope 100 ft.
- 98.80 Wash, 15 lks. wide, 1 ft. deep, in the bottom of draw, drains N.80°W. about.5 chs. dist., thence southwesterly; asc. S. slope 40 ft.
- 100.30 Spur, slopes W. about 5 chs. dist.; desc. 40 ft.
- 102.00 Wash, 40 lks. wide, 2 ft. deep, in the bottom of draw, drains S.60°W.; asc. abrupt SE. slope 105 ft.
- 105.40 Spur, from N.70°E., projects N.70°W. approximately 8 chs. dist.; desc. NE. slope 25 ft.
- 107.50 Draw, drains NW.; asc. SW. slope 25 ft. to
- 110.53 On top of spur, projecting NW., intersect the S. bdy. of sec. 32, T. 6 S., R. 24 E., east.8.94 chs. dist. from the cor. of secs. 31 and 32, which is an iron post, 2 ins. diam., extending 9 ins. above ground, firmly set, marked, and witnessed as described in the official record of the survey of T. 6 S., R. 24 E.; and at the point of intersection, set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for closing cor. of secs. 5 and 6, T. 7 S., with brass cap mkd.

T6SR24E
 S32

 S6|S5 /
 T7SR24E
 CC
 1936

from which

A cedar, 6 ins. diam., bears S.34°30'E., 95 lks. dist., mkd. S 5 C C B T.'

A cedar, 6 ins. diam., bears S.87°15'W., 238 lks. dist., mkd. C C B T.

The bearing trees are too scrubby to permit the full marking.

Land, rolling, rough, and broken bad lands, draining generally to the NW.; outcroppings of shale and red, yellow, and light colored sandstone formation.

Soil, red sandy clay about 6 ins. to 10 ft. deep, lying on varied colored clay subsoils or on bedrock, 4th. rate. Alternate layers of red sand, varied colored clays, shale, and sandstone on portions of mile, 4th. rate.

Timber, cedar.

Undergrowth, black sagebrush, shadscale, cotton brush,

SUBDIVISION OF T. 7 S., R. 24 E.

Chains

salt brush, and greasewood; a sparse to scattering growth of gramma and bunch grass.

Poor to fair winter grazing land.

ESTABLISHMENT OF QUARTER SEC. CORS. BETWEEN CLOSING CORS.
ON NORTH BOUNDARY OF T. 7 S., R. 24 E.

Note: Each of the $\frac{1}{4}$ sec. cors. bet. the closing cors. on the N. bdy. of T. 7 S., R. 24 E., are established from the nearest $\frac{1}{4}$ sec. cors. on the S. bdy. of T. 6 S., R. 24 E., heretofore described in the official record as surveyed by me in Group No. 274.

Commence at the $\frac{1}{4}$ sec. cor. of sec. 31, on the S. bdy. of T. 6 S., R. 24 E.

East, on a true line along N. bdy. of sec. 6.

- 8.94 Westing of 40.00 chs. from the closing cor. of secs. 5 and 6, T. 7 S., set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor. of sec. 6, with brass cap mkd.

$\frac{1}{4}$ S6

1936

of stone, 4 ft. base, $2\frac{1}{2}$ ft. high, S. of cor. raise a mound

From the $\frac{1}{4}$ sec. cor. of sec. 32, on the S. bdy. of T. 6 S., R. 24 E.,

East, on a true line along N. bdy. of sec. 5.

- 9.00 Point midway bet. the closing cors. of secs. 4 and 5, and 5 and 6, T. 7 S., set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor. of sec. 5, with brass cap mkd.

$\frac{1}{4}$ S5

1936

from which

A cedar, 8 ins. diam., bears S. $3^{\circ}00'E.$, 577 lks. dist., mkd. $\frac{1}{4}$ S 5 B T.

There are no other trees available; therefore, I raise a mound of stone, 4 ft. base, 3 ft. high, S. of cor.

From the $\frac{1}{4}$ sec. cor. of sec. 33, on the S. bdy. of T. 6 S., R. 24 E.,

East, on a true line along N. bdy. of sec. 4.

- 7.03 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for witness $\frac{1}{4}$ sec. cor. of sec. 4, with brass cap mkd.

$\frac{1}{4}$ S4 W C

1936

ESTABLISHMENT OF QUARTER SEC. CORS. BETWEEN CLOSING CORS.
ON NORTH BOUNDARY OF T. 7 S., R. 24 E.

Chains

raise a mound
of stone, $2\frac{1}{2}$ ft. base, 2 ft. high, S. of cor.

- 9.03 True point for $\frac{1}{4}$ sec. cor. of sec. 4 or point midway bet. the closing cors. of secs. 3 and 4, and 4 and 5, T. 7 S., falls in the bottom of a wash, making the establishment of a cor. monument impracticable. The wash is 100 lks. wide, 15 ft. deep, draining N.10°W.

From the $\frac{1}{4}$ sec. cor. of sec. 34, on the S. bdy. of T. 6 S., R. 24 E.,

East, on a true line along N. bdy. of sec. 3.

- 8.93 Point midway bet. the closing cors. of secs. 2 and 3, and 3 and 4, T. 7 S., set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor. of sec. 3, with brass cap mkd.

$\frac{1}{4}$ S3

1936

from which

A cedar limb, 4 ins. diam., bears S.18°57'E., 279 lks. dist., mkd. $\frac{1}{4}$ S 3 B T.

A cedar, 8 ins. diam., bears S.10°00'W., 260 lks. dist., mkd. $\frac{1}{4}$ S 3 B T.

From the $\frac{1}{4}$ sec. cor. of sec. 35, on the S. bdy. of T. 6 S., R. 24 E.,

East, on a true line along N. bdy. of sec. 2.

- 8.86 Point midway bet. the closing cors. of secs. 1 and 2, and 2 and 3, T. 7 S., set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor. of sec. 2, with brass cap mkd.

$\frac{1}{4}$ S2

1936

raise a mound
of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, S. of cor.

From the $\frac{1}{4}$ sec. cor. of sec. 36, on the S. bdy. of T. 6 S., R. 24 E.,

East, on a true line along N. bdy. of sec. 1.

- 8.94 Point midway bet. the closing cor. of secs. 1 and 2, and the closing cor. of Tps. 7 S., Rs. 24 and 25 E., which is an iron post, 3 ins. diam., extending 9 ins. above ground, firmly set, marked, and witnessed as described in the official record of the survey of T. 7 S., R. 25 E., set an iron post, 3 ft. long, 1 in. diam., 22 ins. in the ground to solid rock, and in a mound of stone, 4 ft. base, 1 ft. high, for $\frac{1}{4}$ sec. cor. of sec. 1, with brass cap mkd.

ESTABLISHMENT OF QUARTER SEC. CORRS. BETWEEN CLOSING CORRS.
ON NORTH BOUNDARY OF T. 7 S., R. 24 E.

Chains

$\frac{1}{4}$ S 1

1936

from which

A cedar, 3 ins. diam., bears S.44°15'E., 33 lks. dist., mkd. B T.

A cedar, 9 ins. diam., bears S.27°00'W., 52 lks. dist., mkd. $\frac{1}{4}$ S 1 B T.

GENERAL DESCRIPTION

Rolling, rough, and broken bad lands comprise the greater part of this township, although a nearly level, gently rolling, and rolling bench, which is known as Dead Man's Bench, covers the larger portion of the four south tiers of sections and small tracts in sections 8, 9, and 10. The bad lands consist mainly of deep draws, separated by sharp and narrow spurs and ridges, some of which being nearly barren; and several small benches and large nearly level, gently rolling, and rolling draws, hollows, and swales are found in the two northern tiers of sections, and more so in sections 1, 2, 3, 4, 5, and 6. The elevation above sea level varies from approximately four thousand eight hundred feet on the lower bad lands to about five thousand seven hundred feet on top of Dead Man's Bench. The north rim of Dead Man's Bench crosses the east boundary of section 13, north about ten chains distant from the corner of sections 13, 18, 19, and 24, and bears northwesterly through sections 13, 14, 15, and 10, thence westerly across section 9, and thence southwesterly through sections 8, 17, and 18. All of the land to the north of this rim and all of section 6, and the greater part of section 7 have a general northern exposure and drainage; while all of the township that lies to the south of the north rim of the bench, and the extreme southern part of section 7 have a southern exposure and drains generally to the southwest. Dead Man's Bench extends easterly and southeasterly from Township 7 South, Range 24 East into Townships 7 and 8 South, Range 25 East. A man by the name of Bill Redman was killed on this bench, and buried in the SE. $\frac{1}{4}$ SE. $\frac{1}{4}$ of section 8; Township 7 South, Range 24 East; and since that time the bench has been known as Dead Man's Bench.

Light colored, gray, yellow, and red sandstone is the principal formation, appearing on the surface mostly as outcroppings, although shale, gypsum, and quartzite are found on some of the sections. Surface indications of gilsonite are shown in section 1, but no evidence of oil, coal, or mineral was seen in this township.

The soil is a red sand or sandy loam or red sandy clay, varying in depth from about six inches to three feet, on tops and slopes and on benches, to approximately three to thirty feet in the bottoms of draws, hollows, and swales, and lying on yellow sand, or on a brown, yellow, or white chalky clay subsoil, or on varied colored clays, or on sandstone, shale, or gypsum bedrock, first to fourth rate. Alternate layers of varied colored clays, red sand, sandstone, shale, and gypsum compose portions of the bad lands.

Cedar is the only timber found in this township, and it varies from a scattering to a heavy growth on nearly all of the tops and slopes of spurs, ridges, and small benches. A very few cedar grow on top of Dead Man's Bench.

The undergrowth consists of black sagebrush, shadscale, cotton brush, salt brush, white sagebrush, and greasewood.

GENERAL DESCRIPTION

being medium dense to dense on the tops of all the benches and in nearly all the larger draws, hollows, and swales, but mostly scattering on the greater portion of the bad lands. Scattering to dense gramma grass grows on the tops of all the benches, but only sparse to scattering gramma and bunch grass is found on the tops and slopes and on the bad lands.

There are no streams, springs, nor seeps of water, nor any developed water holes or reservoirs in this township.

In many of the broad draws, hollows, and swales in the northeastern part of the township and on the tops of all benches, the soil is adapted for raising crops, but owing to the scarcity of water for irrigation, farming is impracticable.

On the surface the land is only suitable for grazing purposes, for the grass and brush make the township a fair to a good fall and winter range for stock. Approximately three hundred head of cattle and ten thousand sheep graze on these sections and in the adjoining townships during the spring, fall, and winter months. The stock depend upon snow for water during the winter, but trail to water holes and reservoirs in the adjacent townships, in the spring and fall.

A well traveled automobile and wagon road from U. S. Highway No. 40 to Watson, Utah crosses the north boundary of section 1, west approximately twelve chains distant from the quarter section corner of section 1, bears in a southeasterly direction, and leaves the east boundary of the township just north of the corner of sections 1, 6, 7, and 12. Two wagon roads from U. S. Highway No. 40 to Watson, Utah enter the township; one crosses the north boundary near the quarter section corner of section 2 and bears southwesterly, and the other passes west about fifteen chains distant from the closing corner of sections 4 and 5 on the north boundary of the township, and takes a southeasterly course. These roads meet in the SE. $\frac{1}{4}$ NE. $\frac{1}{4}$ of section 9 and form one road which bears generally to the south to the SE. $\frac{1}{4}$ SE. $\frac{1}{4}$ of section 9. At this point the roads fork, one branch has a southwesterly bearing, and leaves the west boundary of section 18, just north of the quarter section corner between sections 13 and 18, thence to Watson, Utah. The other fork has a southeasterly course, and crosses the east boundary of section 24, north a few chains distant from the corner of sections 19, 24, 25, and 30, thence to Watson, Utah. From the latter branch, two sheep wagon roads take off across Dead Man's Bench, one to Watson, Utah. There are no other improvements and no settlers have located in this township.

| | | |
|--|---|--|
| | <p>1. The first part of the document discusses the general principles of the proposed system. It outlines the objectives and the scope of the project, emphasizing the need for a comprehensive and integrated approach to the problem at hand.</p> <p>2. The second part of the document provides a detailed description of the system's architecture. It details the various components and their interactions, highlighting the modular and scalable nature of the design.</p> <p>3. The third part of the document describes the implementation process. It outlines the key milestones, the resources required, and the timeline for the project. It also discusses the challenges encountered and the strategies used to overcome them.</p> <p>4. The fourth part of the document presents the results of the implementation. It includes a comparison of the system's performance against the initial requirements and the industry standards. It also discusses the user feedback and the overall satisfaction with the system.</p> <p>5. The fifth part of the document discusses the future work and the potential for further improvements. It identifies the areas where the system can be enhanced and the steps that need to be taken to achieve these goals.</p> | |
|--|---|--|

BOOK A 522

4-680
(Revised May 1934)

FIELD ASSISTANTS

| NAMES | CAPACITY |
|-------------------|---------------------|
| LeGrand Fowlke | Principal Assistant |
| James B. Ollerton | Chainman |
| Robert Sumner | Chainman |
| Robert Miller | Chainman |
| Ernest H. Layton | Flagman |
| T. Neil McCormick | Flagman |
| George H. Schramm | Cornerman |
| Vernon Morgan | Cornerman |
| George Snook | Cornerman |
| Wayne M. Erickson | Cornerman |
| Clarence Palmer | Axman |
| Paul Shaw | Axman |
| Robert Miller | Axman |
| Vaughn Wonnacott | Axman |
| Alton Vernon | Axman |
| Ted Tuttle | Axman |
| Ronald Ashby | Axman |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |

CERTIFICATE OF UNITED STATES SURVEYOR

We, J. C. Clark and Diran T. Broun, Jr., HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 1st. day of August, 1937, received from the district cadastral engineer for Utah, with assignment instructions dated Sept. 26, 1936 and supplemental assignment instructions dated Oct. 7, 1936 we have surveyed the West Boundary and the Subdivision, and established Quarter Section Corners between Closing Corners on the North Boundary of Township 7 South, Range 24 East of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by us and under our direction; and that said survey has been made in strict conformity with said instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in the specific manner described in the foregoing field notes. Salt Lake City, Utah.
March 27, 1937.

J. C. Clark U. S. Surveyor
Diran T. Broun Jr. Transitman.

CERTIFICATE OF APPROVAL

OFFICE OF U.S. SUPERVISOR OF SURVEYS,
 DENVER, COLORADO MAY 5 - 1937, 1937

The foregoing field notes of the survey of the West boundary and the Subdivision, and the establishment of Quarter Section Corners between Closing Corners on North Boundary of Township 7 South, Range 24 East

executed by J. C. Clark and Diran T. Broun, Jr. under special instructions dated August 1, 1936 and assignment instructions dated Sept. 26, 1936 and supplemental/assignment instructions dated Oct. 7, 1936, having been critically examined, and the necessary corrections made prior to their certification by the engineer^S, the said field notes, and the survey therein described, are hereby approved.

Diran T. Broun Jr.
 U.S. Supervisor of Surveys.

CERTIFICATE OF TRANSCRIPT

~~I certify that the foregoing transcript of the field notes of the above-described surveys in Utah~~, is a true copy of the original field notes on file in the public survey office.

Diran T. Broun Jr.
 U.S. Supervisor of Surveys.

Blank

Page

Blank

Page

BOOK A-522

4-579
(April 1933)

BOOK "C"

FIELD NOTES

A DEPENDENT RESURVEY OF THE THIRD STANDARD PARALLEL SOUTH

THROUGH RANGE 20 EAST

AND OF THE

NORTH AND WEST BOUNDARIES

AND THE

SURVEY OF THE SUBDIVISION OF TOWNSHIP 5 SOUTH, RANGE 20 EAST.

Of the SALT LAKE Meridian,

In the State of UTAH

EXECUTED BY

Robert C. Yundt, Surveyor,

James W. Hardison, Public Land Surveyor, and

Ervine F. Smith, Transitman.

Under special instructions dated August 1, 19 36, which provided

for the surveys included under Group No. 274, bearing the approval of the

Commissioner of the General Land Office under date of September 16, 1936
supplemental

and assignment instructions dated April 12, 1937, April 19, 1937.

Survey commenced April 20, 19 37

Survey completed May 10, 19 37

BOOK A-522

INDEX DIAGRAM.

Township 5 SOUTH., Range 20 EAST.

| 12 | 11 | 10 | 10 | 9 | 8 | |
|----------|----------|----------|----------|----------|----------|----------|
| 6 74 | 75 73 | 5 58 | 4 57 | 4 49 | 3 48 | 2 39 |
| 7 70 | 72 69 | 8 56 | 9 55 | 4 47 | 10 38 | 11 28 |
| 18 67 | 68 66 | 17 54 | 4 54 | 16 45 | 15 37 | 14 26 |
| 19 64 | 65 63 | 20 53 | 21 52 | 4 44 | 22 35 | 23 24 |
| 20 61 | 62 59 | 29 51 | 28 49 | 4 42 | 27 33 | 26 22 |
| 21 6 | 60 5 | 50 49 | 50 4 | 4 41 | 34 31 | 35 20 |
| 19 6 | 59 5 | 49 4 | 48 4 | 4 41 | 34 31 | 35 20 |

T. 5 S., R. 20 E.

| | | | | | |
|----|----|----|----|----|----|
| 6 | 5 | 4 | 3 | 2 | 1 |
| 7 | 8 | 9 | 10 | 11 | 12 |
| 18 | 17 | 16 | 15 | 14 | 13 |
| 19 | 20 | 21 | 22 | 23 | 24 |
| 30 | 29 | 28 | 27 | 26 | 25 |
| 31 | 32 | 33 | 34 | 35 | 36 |

Lines surveyed by Robert C. Yundt

- " " " James W. Hardison - _____
- " " " Ervine F. Smith _____

| | | | | | | |
|-----|-----|-----|-----|-----|-----|-----|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 |
| 11 | 12 | 13 | 14 | 15 | 16 | 17 |
| 21 | 22 | 23 | 24 | 25 | 26 | 27 |
| 31 | 32 | 33 | 34 | 35 | 36 | 37 |
| 41 | 42 | 43 | 44 | 45 | 46 | 47 |
| 51 | 52 | 53 | 54 | 55 | 56 | 57 |
| 61 | 62 | 63 | 64 | 65 | 66 | 67 |
| 71 | 72 | 73 | 74 | 75 | 76 | 77 |
| 81 | 82 | 83 | 84 | 85 | 86 | 87 |
| 91 | 92 | 93 | 94 | 95 | 96 | 97 |
| 101 | 102 | 103 | 104 | 105 | 106 | 107 |
| 111 | 112 | 113 | 114 | 115 | 116 | 117 |
| 121 | 122 | 123 | 124 | 125 | 126 | 127 |
| 131 | 132 | 133 | 134 | 135 | 136 | 137 |
| 141 | 142 | 143 | 144 | 145 | 146 | 147 |
| 151 | 152 | 153 | 154 | 155 | 156 | 157 |
| 161 | 162 | 163 | 164 | 165 | 166 | 167 |
| 171 | 172 | 173 | 174 | 175 | 176 | 177 |
| 181 | 182 | 183 | 184 | 185 | 186 | 187 |
| 191 | 192 | 193 | 194 | 195 | 196 | 197 |
| 201 | 202 | 203 | 204 | 205 | 206 | 207 |
| 211 | 212 | 213 | 214 | 215 | 216 | 217 |
| 221 | 222 | 223 | 224 | 225 | 226 | 227 |
| 231 | 232 | 233 | 234 | 235 | 236 | 237 |
| 241 | 242 | 243 | 244 | 245 | 246 | 247 |
| 251 | 252 | 253 | 254 | 255 | 256 | 257 |
| 261 | 262 | 263 | 264 | 265 | 266 | 267 |
| 271 | 272 | 273 | 274 | 275 | 276 | 277 |
| 281 | 282 | 283 | 284 | 285 | 286 | 287 |
| 291 | 292 | 293 | 294 | 295 | 296 | 297 |
| 301 | 302 | 303 | 304 | 305 | 306 | 307 |
| 311 | 312 | 313 | 314 | 315 | 316 | 317 |
| 321 | 322 | 323 | 324 | 325 | 326 | 327 |
| 331 | 332 | 333 | 334 | 335 | 336 | 337 |
| 341 | 342 | 343 | 344 | 345 | 346 | 347 |
| 351 | 352 | 353 | 354 | 355 | 356 | 357 |
| 361 | 362 | 363 | 364 | 365 | 366 | 367 |
| 371 | 372 | 373 | 374 | 375 | 376 | 377 |
| 381 | 382 | 383 | 384 | 385 | 386 | 387 |
| 391 | 392 | 393 | 394 | 395 | 396 | 397 |
| 401 | 402 | 403 | 404 | 405 | 406 | 407 |
| 411 | 412 | 413 | 414 | 415 | 416 | 417 |
| 421 | 422 | 423 | 424 | 425 | 426 | 427 |
| 431 | 432 | 433 | 434 | 435 | 436 | 437 |
| 441 | 442 | 443 | 444 | 445 | 446 | 447 |
| 451 | 452 | 453 | 454 | 455 | 456 | 457 |
| 461 | 462 | 463 | 464 | 465 | 466 | 467 |
| 471 | 472 | 473 | 474 | 475 | 476 | 477 |
| 481 | 482 | 483 | 484 | 485 | 486 | 487 |
| 491 | 492 | 493 | 494 | 495 | 496 | 497 |
| 501 | 502 | 503 | 504 | 505 | 506 | 507 |

T. 5 S., R. 20 E.

Chains

The survey of township 5 South, range 20 East was executed with Young and Sons solar transit No. 8395 used by Robert C. Yundt, U. S. Surveyor, and Ervine F. Smith, Transitman; and W. and L. E. Gurley solar transit No. 262684 used by James W. Hardison, Public Land Surveyor. Each instrument is equipped with a Smith solar attachment and full vertical circle. The horizontal circle has two double opposite verniers reading to single minutes which is also the least count of the verniers of the vertical circle and the latitude and declination arcs. The instruments were in good condition, having been placed in satisfactory adjustment prior to beginning the survey and tested and found free from appreciable error, were approved by the district cadastral engineer April 12, 1937.

As this township is all open country transit lines were carried by taking the mean of direct and reversed sights at each instrument station. The bearing of the lines were deflected from a meridian established by an observation upon Polaris at elongation.

The measurements were made with two Lallie steel tapes, 5 chs. in length; each tape is graduated every link for the first 100 links and thereafter at intervals of 10 lks. The tapes were tested by comparison with a Luffkin standard steel tape and found correct. The measurements were made on the slope; the vertical angles determined by clinometers in good adjustment; the field notes show the horizontal equivalents.

The data furnished with the special instructions gives the geographic position of the standard cor. of Tp. 5 S., Rs. 20 and 21 E. as follows: latitude $40^{\circ}20'N.$, and longitude $109^{\circ}37'W.$ April 19, 1937 at the standard cor. of T. 5 S., Rs. 20 and 21 E., at 5h 57.1 m a. m. l. m. t. or 6h 15.6m a. m. by my watch which reads correct 105th meridian time as determined by radio signals I observe ^{Polaris} at eastern elongation, making three sights each with the telescope in direct and reversed positions, deflecting an angle west to a flag about 30 chs. North.

Azimuth of Polaris----- $1^{\circ}21.5'E.$

Mean angle from Polaris west to flag $1^{\circ}21.$

Bearing of flag ----- North

The bearing of the lines were checked by altitude observations on the sun for azimuth, during the progress of the survey.

DEPENDENT RESURVEY OF THE FIRST STANDARD PARALLEL SOUTH
THROUGH RANGE 20 EAST

Reestablishment of surveys executed by
D. G. Major, U. S. Deputy Surveyor,
in 1882.

Random Lines.

From the standard cor. of T. 5 S., Rs. 20 and 21 E. an iron post, 3 ins. diam., set, marked and witnessed as described in the official record.

S. $89^{\circ}39'W.$, on a random line, making proper offsets to the north from the tangent to the parallel at intervals of 40.00 chs., setting temp. $\frac{1}{4}$ sec. and sec. corners, along the first standard parallel south,

467 44 Intersect the original standard cor. of T. 5 S., Rs. 19 and 20 E., now an angle point, a sandstone 14x9x6 ins. set

DEPENDENT RESURVEY OF THE FIRST STANDARD PARALLEL SOUTH, THROUGH RANGE 20.EAST

Chains

marked and witnessed as described in the official record.

A thorough search disclosed no evidence of the original standard or closing corners along this line.

True Lines.

From the standard cor. of T. 5 S., Rs. 20 and 21 E.

S. 89°39'W., along south boundary of sec. 36.

Desc. 25 feet over rocky SW. slope.

3.20 Dry wash, 16 lks. wide, 7 ft. deep, drains SE., ^{thence} over rolling land draining SE.

14.70 Dry wash in swale, 12 lks. wide, 3 ft. deep, drains S. 60° E.; asc. 18 ft. over rolling northerly slope.

21.90 Over rolling land.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for standard $\frac{1}{4}$ sec. cor., with brass cap mkd.

SC
 $\frac{1}{4}$ S 36

1937

of stone, 2 ft. base, $1\frac{1}{2}$ ft. high. N. of cor. ^{raise a mound}

41.90 Dim road, bears NW. and SE.

51.33 Telephone line bears N.68°E. and S. 68°W., generally along crest of ridge, over rolling land draining generally NW.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for standard cor. of secs. 35 and 36, with brass cap mkd.

SC
T5S | R20E
S35 | S36

1937

of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor. ^{raise a mound}

Land rolling.

Soil, sandy clay, loose sand and generally 3rd rate.

No timber.

Undergrowth, sagebrush and shadacale.

Fair grazing land.

S.89°39'W., along south boundary of section 35.

Over rolling land.

1.00 Desc. 150 ft. over steep broken westerly slope.

DEPENDENT RESURVEY OF THE FIRST STANDARD PARALLEL SOUTH,
THROUGH RANGE 20 EAST

Chains

12.00 Dry creek, 140 lks. wide, 12 ft. deep, from NW., drains S. 70°W. for 8 chains, thence generally south; asc. 35 ft. over east slope.

15.30 Over crest of small spur.

18.90 Desc. 15 ft. over SW. slope.

19.90 Along steep general S. slope, along N. side of wash, drains generally S. from W.

31.70 Asc. 70 ft. over steep E. slope.

36.90 Over rolling desert land draining generally E.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground for standard $\frac{1}{4}$ sec. cor., with brass cap mkd.

SC
 $\frac{1}{4}$ S 35

1937

raise a mound

of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, N. of cor.

Over rolling land draining generally SE.

54.80 Dim road, bears S. 20°E. and N. 20°W.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground for standard cor. of secs. 34 and 35, with brass cap mkd.

SC
T5S R20E
S34 | S35

1937

raise a mound

of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, N. of cor.

Land, rolling and rough broken

Soil, sandy clay, loose sand and rocky; 3rd and 4th rate.

No timber.

Undergrowth, sagebrush and shadscale.

Fair grazing land.

S. 89°39'W. along south boundary of sec. 34.

Over nearly level land.

7.90 Abandoned highway, bears N. 70°E. and S. 70°W.

25.97 U. S. Highway No. 40 bears N. 71 $\frac{1}{4}$ °E. to Vernal, Utah and S. 71 $\frac{1}{4}$ °W. to Gusher, Utah.

40.00 Set iron post, 1 in. diam., 3 ft. long, 27 ins. in the

DEPENDENT RESURVEY OF THE FIRST STANDARD PARALLEL SOUTH,
THROUGH RANGE 20 EAST

Chains

ground for standard $\frac{1}{4}$ sec. cor., with brass cap mkd.

SC
 $\frac{1}{4}$ S 34

1937

raise a mound

of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

Asc. 30 ft. over slightly rolling land draining generally SE. to sec. cor.

44.40 Dim road, bears N. and S.

64.90 Abandoned road, bears NE. and SW.

80.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for standard cor. of secs. 33 and 34, with brass cap mkd.

SC
T5S | R20E
S33 | S34

1937

raise a mound

of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

Land, nearly level and slightly rolling.

Soil, sandy loam; 3rd rate.

No timber.

Undergrowth, Russian thistle, sagebrush, shadscale and cottonbrush.

Fair grazing land.

S. $89^{\circ}39'W.$, along south boundary of sec. 33.

Over rolling land draining generally E.

6.30 Small spur, 15 ft. above sec. cor., extends SE; desc. 40 ft. over slightly broken general SW. slope.

12.30 Dry draw, near head, drains SW.

23.90 Asc. 65 ft. over broken southeasterly slope.

29.20 Over rolling land draining SE.

33.00 Desc. 30 ft. over rolling land draining generally west.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground for standard $\frac{1}{4}$ sec. cor., with brass cap mkd.

SC
 $\frac{1}{4}$ S33

1937

raise a mound

DEPENDENT RESERVE OF THE FIRST STANDARD PARALLEL SOUTH,
THROUGH RANGE 20 EAST

Chains

of stone, 2 ft. base, 1½ ft. high, N. of cor. Cor. stands at base of cut earth bank 3 ft. high, faces W.

42.00

Desc. steep broken westerly slope.

61.70

Dry wash, 100 ft. below ¼ sec. cor., 10 lks. wide, 4 ft. deep, from N.30°E. drains SW., 7 chains to Halfway Hollow, over rough rolling land draining generally S.

68.60

Halfway Hollow, dry, 3 chains wide, and 11 ft. deep, drains S.20°E.; asc. 80 ft.

78.90

Narrow spur, projects S.10°E. 5 chains; desc. 30 ft. to sec. cor.

80.00

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for standard cor. of secs. 32 and 33, with brass cap mkd.

SC

| | |
|-----|------|
| T5S | R20E |
| S32 | S33 |

1937

raise a mound

of stone, 2 ft. base, 1½ ft. high, N. of cor.

Land, rolling, rough and broken.

Soil, sandy loam and rocky; 4th rate.

No timber.

Undergrowth, shadescale, sagebrush, greasewood and Russian thistle.

Poor grazing land.

S.89°39'W., along south boundary of sec. 32.

Desc. 25 ft. over W. slope.

0.80

Draw, 15 lks. S. of line, from N.80°W., drains SE; along S. slope.

3.60

Junction of draws from SW. and NW., drains S.80°E.; asc. 55 ft. over steep E. slope.

5.20

Asc. 35 ft. over rolling land draining generally SE.

40.00

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for standard ¼ sec. cor., with brass cap mkd.

SC

| |
|--------|
| ¼ S 32 |
|--------|

1937

raise a mound.

of stone, 2 ft. base, 1½ ft. high, N. of cor.

Asc. 40 ft. over rolling land draining generally E.


60.20

Asc. 145 ft. over steep rocky general E. slope.

DEPENDENT RESURVEY OF THE FIRST STANDARD PARALLEL SOUTH,
THROUGH RANGE 20 EAST.

Chains

69.90 Asc. 10 ft. over rolling mesa land.
80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground for standard cor. of secs. 31 and 32, with brass cap mkd.



Land, rolling and rough.
Soil, sandy loam and rocky; 4th rate.
No timber.
Undergrowth, shadscale, sagebrush and Russian thistle.
Poor grazing land.


S.89°39'W., along south boundary of sec. 31.

Desc. 30 ft. over rolling land.

16.60 Desc. 145 ft. over broken sandstone ledges, bearing generally NW. and SE.

24.60 Over rough rolling land draining generally S.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 24 ins. in the ground, and rock for standard $\frac{1}{4}$ sec. cor., with brass cap marked



1937

raise a mound

of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

A triangulation station and bench mark of the U. S. Geological Survey, a brass tablet, set in surface rock, marked with a cross (X) within a triangle, and the figures 5543 feet above sea level, bears N.20°06'E. 34.14 chains.

47.70 Old road, bears N.15°E. and S.

54.10 Dry wash, 20 lks. wide, 3 ft. deep, drains S.10°W.; over rolling land draining generally E.

58.18 The closing cor. of T. 6 S., Rs. 19 and 20 E.

An iron post, 3 ins. in diam., set, mkd. and witnessed as described in the official record.

67.44 The original cor. of T. 5 S., Rs. 19 and 20 E., now an angle point, heretofore described.

At point for corner.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the

DEPENDENT RESURVEY OF THE FIRST STANDARD PARALLEL SOUTH,
THROUGH RANGE 20 EAST

Chains

ground, with the original stone alongside, for angle point along the south bdy. of sec. 31, with brass cap mkd.

AP
T5S R20E
S31

1937

raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.

Thence

S. 89°49'W., continue measurement.

Over rolling land.

80.00 Set an iron post, 3 ft. long, .1 in. diam., 27 ins. in the ground for cor. of lots 7 and 8, sec. 31, with brass cap mkd.

T5S R20E
S31
7 | 8

1937

raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.

88.76 The standard cor. of T. 5 S., Rs. 19 and 20 E., a sandstone, 18x16x12 ins., set, mkd. and witnessed as described in the official record.

At point for corner

Set an iron post, 3 ft. long, 3 ins. diam., 27 ins. in the ground, with the original cor. deposited alongside, for standard cor. of T. 5 S., Rs. 19 and 20 E., with brass cap mkd.

SC
T5S
R19E R20E
S36 | S31

1937

raise a mound of stone, 4 ft. base, 2 ft. high, N. of cor. and Land, rolling to rough/broken.

Soil, sandy, clay and rocky; 3rd and 4th rate.

No timber.

Undergrowth, sagebrush and shadscale.

Poor grazing land.

DEPENDENT RESURVEY OF THE NORTH BOUNDARY OF T. 5 S., R. 20 E.

DEPENDENT RESURVEY OF THE N. BDY. OF T. 5 S., R. 20 E.

Reestablishment of surveys executed by S. P. and J. R. Stewart, U. S. Deputy Surveyors, in 1906.

This bdy. was retraced between the original corners, all of which were recovered and only minor differences with the original corners and distances were noted. The original course and distances and topographic calls are retained. On the retracement proper account was made for the effect of the tangency of the transit line.

From the corner of Tps. 4 and 5 S., Rs. 20 and 21 E., an iron post, 3 ins. diam., set, mkd. and witnessed as described in the official record.

West, along the N. bdy. of the Tp., bet. secs. 1 and 36.

40.00 The 1/4 sec. cor.

A quartzite stone 16x12x5 ins. firmly set and mkd. 1/4 on N. face.

At point for corner.

Set an iron post, 3 ft. long, 1 in. diam., 2 ins. in the ground to underlying rock, with the mkd. stone alongside, and in a mound of stone to top, for 1/4 sec. cor., with brass cap mkd.

1/4 S 36
S 1
1937

from which

A juniper, 6 ins. diam., bears N. 9 1/2° W., 96 lks. dist., mkd. 1/4 S36BT.

A juniper, 6 ins. diam., S. 2 3/4° W., 52 lks. dist., mkd. 1/4 S1BT.

80.00 The cor. of secs. 1, 2, 35 and 36

A quartzite stone 18x9x6 ins. firmly set, mkd. with 1 notch on E. edge and 5 notches on W. edge, with a mound of stone W. of cor.

At point for cor.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, with the mkd. stone alongside, for cor. of secs. 1, 2, 35 and 36, with brass cap mkd.

T4S R20E
S35 | S36
S2 | S1
T5S
1937

renew the

mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Land, rolling to rough broken.

DEPENDENT RESURVEY OF THE NORTH BOUNDARY OF T. 5 S., R. 20 E.

Chains

Soil, sandy and sandy loam; 3rd rate.

Timber, scattering scrub juniper.

Undergrowth, sagebrush, shadscale.

Good grazing land.

West, along the N. bdy. of the Tp. bet. secs. 2 and 35.

40.00 The $\frac{1}{4}$ sec. cor., a sandstone 19x13x5 ins. firmly set and mkd. $\frac{1}{4}$ on N. face, with a mound of stone N. of cor.

At point for cor..

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with the mkd. stone alongside, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

| | |
|---------------|------|
| $\frac{1}{4}$ | S 35 |
| ----- | |
| S 2 | |

1937

renew mound

of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

80.00 The cor. of secs. 2, 3, 34 and 35, a quartzite stone 14x9 x6 ins., firmly set and mkd. with 2 notches on E. edge and 4 notches on W. edge, with mound of stone W. of cor.

At point for cor.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, with the mkd. stone alongside, for cor. of secs. 2, 3, 34 and 35, with brass cap mkd.

| | |
|-------|------|
| T4S | R20E |
| S34 | S35 |
| ----- | |
| S 3 | S 2 |
| T 5S | |

1937

raise a mound

of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

Land, rolling and nearly level.

Soil, sandy loam and rocky; 3rd and 4th rate.

No timber.

Undergrowth, sagebrush.

Good grazing land.

DEPENDENT RESURVEY OF THE NORTH BOUNDARY OF T. 5. S. R. 20. E.

Chains

West, along the N. bdy. of the Tp. bet. secs. 3 and 34.

40.00

The $\frac{1}{4}$ sec. cor. a sandstone 16x7x5 ins. firmly set in a mound of stone, marks illegible.

At point for corner.

Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground to underlying rock, with the marked stone alongside and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap mkd. $\frac{1}{4}$ S 34

S 3

1937

8.00

The cor. of secs. 3, 4, 33 and 34, a sandstone 17x9x7 ins., mkd. with 3 notches on E. and 3 notches on W. faces, firmly set, with mound of stone W. of cor.

At point for corner.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground with mkd. stone alongside, for cor. of secs. 3, 4, 33 and 34, with brass cap mkd.

T4S R20E
S33 | S34

S4 | S3

T5S

1937

from which

The original bearing trees, all healthy well marked trees.

A juniper, 5 ins. diam., bears N. 43° E., 35 lks. dist., mkd. T4SR20ES34BT.

A juniper, 6 ins. diam., bears S. 65 $\frac{1}{2}$ °E, 106 lks. dist., mkd. T5SR20ES3BT.A juniper, 6 ins. diam., bears S. 32 $\frac{1}{2}$ °W., 17 lks. dist., mkd. T5SR20ES4BT.

A juniper, 7 ins. diam., bears N. 69°W. 23 lks. dist., mkd. T4SR20ES33BT.

Hence the mound of stone 3 ft. base, 2 ft. high, W. of cor.

Land, nearly level, rolling and steep broken.

Soil, sandy, loam, clay, and rocky; 3rd and 4th rate.

Timber, scattering juniper.

Undergrowth, sagebrush.

Fair grazing land.

West, along the N. bdy. of the Tp., bet. secs. 4 and 33.

24.00

Graded road, bears irregularly NE. to Vernal, Utah and irregularly SW to La Point, Utah.

DEPENDENT RESERVE OF THE NORTH BOUNDARY OF T.5 S., R.20E.

Chains

entire

40.00 The 1/2 sec. cor., a sandstone, 16x12x5 ins., mkd. 1/2 on N. face, firmly set, and mound of stone N. of cor.

At point for corner.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with the mkd. stone alongside for 1/2 sec. cor., with brass cap mkd.

S 33

S 4

1937

from which

A juniper, 6 ins. diam., bears N.43°E., 23 lks. dist., mkd. 1/2 S33 BT

A juniper, 3 ins. diam., bears S.24°W., 52 lks. dist., mkd BT

Renew the mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor.

80.00 The cor. of secs. 4, 5, 32 and 33, a sandstone, 15x8x5 ins. mkd. with 4 notches on E. edge and 2 notches on W. edge, firmly set.

At point for corner.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground with the mkd. stone alongside, for cor. of secs. 4, 5, 32 and 33, with brass cap mkd.

T5S R20E

S32 | S33

S 5 | S 4

T5S

1937

raise a mound

of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Land, rolling to rough.
Soil, sandy loam and clay; 3rd and 4th rate.
Timber, scattering juniper.
Undergrowth, sagebrush.
Poor grazing land.

West, along the N. bdy. of the Tp. between sections 5 and 32.

40.00 The 1/2 sec. cor., a sandstone, 8x8x12 ins. mkd., 1/2 on N. face, firmly set with mound of stone, N. of cor.

At point for corner.

Set an iron post, 3 ft. long, 1. in. diam., 27 ins. in the ground, with the mkd. stone alongside for 1/2 sec. cor., with brass cap mkd.

DEPENDENT RESURVEY OF THE NORTH BOUNDARY OF T.P. 5, SECTIONS 30 E.

| Chains | anlar0 |
|--|--------------|
| <p>S 32 S 5 1937</p> | <p>00.04</p> |
| <p>renew mound of stone, 2 ft. base, 1½ ft. high, N. of cor.</p> | |
| <p>80.00</p> | |
| <p>The cor. of secs. 5, 6, 31 and 32, a sandstone, 4x8x16 ins., mkd. with 1 notch on E. edge and 5 notches on W. edge, with mound of stone West of cor.</p> | |
| <p>At point for corner. Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, with the mkd. stone alongside for cor. of secs. 5, 6, 31 and 32, with brass cap mkd.</p> | |
| <p>T4S R20E S31 S32</p> | |
| <p>S 6 S 5 T5S</p> | |
| <p>1937 from which</p> | <p>00.08</p> |
| <p>An original bearing tree. A juniper, 7 ins. diam., bears N. 71½° W., 184 lks. dist., mkd. T4SR20ES31BT A new bearing tree. A juniper, 4 ins. diam., bears S. 84° W., 224 lks. dist., mkd. T5SR20ES4BT</p> | |
| <p>Renew the mound of stone, 2 ft. base, 1½ ft. high, W. of cor. Land, rolling.</p> | |
| <p>Soil, sandy, rocky; 4th rate.</p> | |
| <p>Timber, juniper.</p> | |
| <p>Undergrowth, sagebrush.</p> | |
| <p>Fair grazing land.</p> | |
| <p>West, along the N. bdy. of the Tp. bet. secs. 6 and 31.</p> | |
| <p>40.00</p> | |
| <p>The ¼ sec. cor., a sandstone, 5x10x18 ins., mkd. ¼ on N. face, firmly set.</p> | |
| <p>At point for corner.</p> | <p>00.04</p> |
| <p>Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground with the mkd. stone alongside, for ¼ sec. cor., with brass cap mkd.</p> | |
| <p>S 31</p> | |
| <p>of stone, 2 ft. base, 1½ ft. high, N. of cor. From this point, a bench mark of the U. S. Geological Survey, elevation 5701 ft. above sea level, bears S. 57° 24' E. 17.85 chs. dist., a brass tablet seated in a red sandstone ledge, conforming to the record.</p> | |

DEPENDENT RESURVEY OF THE NORTH BOUNDARY OF T.5 N., R.20 E.

Chains

60.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for cor. of lots 4 and 5, Sec. 6, with brass cap mkd.

T4S R20E

S 31

S 4

S 6

T5S

1937

raise a mound

of stone, 2 ft. base, 1 1/2 ft. high, N. of cor.

87.79 The cor. of Tps. 4 and 5 S., Rs. 19 and 20 E., a sandstone, 6x8x18 ins., mkd. 4 S R 20 E on NE. face, 20 E on SE. face, 5 S on SW. face, and 6 notches on the N., S., E., and W. edges with mound of stone W. of cor.

At point for cor.

Set an iron post, 3 ft. long, 3 ins. diam., 27 ins. in the ground, with the mkd. stone alongside, for corner of Tps. 4 and 5 S., Rs. 19 and 20 E., with brass cap mkd.

T 4 S

R19E | R20E

S 36 | S 31

S 1 | S 6

T 5 S

1937

from which

A juniper, 4 ins. diam., bears N.9 3/4°E., 80 lks. dist., mkd. T4SR20ES31BT

A juniper, 4 ins. diam., bears S.16 1/2°E., 75 lks. dist., mkd. T5SR20ES6BT

A juniper, 5 ins. diam., bears S.55°W., 6 lks. dist., mkd. T5SR19ES1BT

A juniper, 5 ins. diam., bears N.24°W., 179 lks. dist., mkd. T4SR19ES31BT

Restore the mound of stone, 3 ft. base, 2 ft. high, W. of corner. The orig. mound was found W. of cor. and restored in orig. position

Land, rolling to rough.

Soil, sandy, clayey and sandy loam, and rocky; 3rd and 4th rate.

Timber, scattering juniper.

Undergrowth, sagebrush.

Fair grazing land.

Chains

enlaro

DEPENDENT RESURVEY OF THE EAST BOUNDARY OF T. 5 S., R. 19 E.

Reestablishment of the surveys executed by S. P. and J. R. Stewart, U. S. Deputy Surveyors, in 1906.

This boundary was retraced between the original corners, all of which were found in good alignment. With the exception of the abandoning of the roads noted in the original survey, the position of two roads noted and the wall on the E. bdy. of sec. 13, noted in the following records the original topographic calls are essentially correct for which refer to the field notes of the original survey.

This bdy. was retraced and dependently resurveyed south in conformity with the original manner of survey.

From the corner of Tps. 4 and 5 S., Rs. 19 and 20 E. South, along the E. bdy. of sec. 11.

25.40 Graded road, Vernal to La Point, bears S. 80° E. and N. 80° W.

38.23 At a point .40 chains N. of the closing corner of secs. 6 and 7, T. 5 S., R. 20 E. Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground to underlying rock, with a sandstone, 4x2x1 ins. mkd. X, deposited at base and in a mound of stone to top, for $\frac{1}{4}$ sec. cor. of sec. 6 with brass cap mkd.

$\frac{1}{4}$
S 6
1937

41.12 The $\frac{1}{4}$ sec. cor., a sandstone, 13x8x5 ins., firmly set and mkd. $\frac{1}{4}$ on W. face.

At point for corner.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with the original mkd. stone alongside, for $\frac{1}{4}$ sec. cor. of sec. 1, with brass cap mkd.

$\frac{1}{4}$
S 1 and 2
1937

raise a mound of stone, 2ft. base, 1 1/2 ft. high, W. of cor.

78.23 The closing cor. of secs. 6 and 7, hereinafter described.

81.12 The cor. of secs. 1 and 12, a sandstone, 15x9x6 ins., firmly set and mkd. 1 notch on N. edge and 5 notches on S. edge, with mound of stone W. of cor.

At point for cor.

Set an iron post, 3 ft. long, 2 inches diameter, 27 ins. in the ground, with the original mkd. stone alongside for cor. of secs. 1 and 12, with brass cap mkd.

U. S. DEPARTMENT OF THE INTERIOR, BUREAU OF LAND MANAGEMENT, RESURVEY OF THE EAST BOUNDARY OF T. 5 S., R. 19 E.

Chains

01131

| | |
|------|------|
| TCS | |
| 119E | R20E |
| S1 | S7 |
| S1E | |
| 1937 | |

raise a mound

of stone, 2 ft. base, 1½ ft. high, W. of cor.

Land, rolling and nearly level.

Soil, sandy; 3rd rate.

No timber.

Undergrowth, sagebrush, greasewood and grass.

Fair grazing land.

South, along the E. bdy. of sec. 12.

27.10 At midpoint between the closing cor. of secs. 6 and 7, and the closing cor. of secs. 7 and 18.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for ½ sec. cor. of sec 7, with brass cap mkd.

| |
|------|
| ½ |
| S 7 |
| 1937 |

raise a mound

of stone, 2 ft. base, 1½ ft. high, E. of cor.

39.94 The ½ sec. cor., a sandstone, 18x12x6 ins., firmly set, mkd. ½ on W. face.

At point for cor.

Set an iron post, 3 ft. long, 1 in. diam., 16 ins. in the ground to underlying rock and in a mound of stone to top with the original marked stone alongside, for ½ sec. cor., sec. 12, with brass cap mkd.

| |
|------|
| ½ |
| S 12 |
| 1937 |

77.09 The closing cor. of secs. 7 and 18 hereinafter described.

79.79 The cor. of secs. 12 and 13. A sandstone, 18x12x5 ins. firmly set and mkd. 2 notches on N. edge and 4 notches on S. edge.

At point for cor.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground with the original stone alongside, for cor. of secs. 12 and 13, with brass cap mkd.

DEPENDENT RESURVEY OF THE EAST BOUNDARY OF T. 18 S. 18 E.

Chains

enisho

| | |
|------|------|
| TSS | TSS |
| R18E | R20E |
| S12 | S14 |
| S12 | S14 |
| S13 | |

1937

raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor. Land, rolling and broken. Soil, rocky, sandy; 4th rate. No timber. Undergrowth, sagebrush, greasewood, and shadeleaf. Poor grazing land.

South along the E. bdy. of sec. 13.

37.32 Midpoint bet. the closing cor. of secs. 7 and 18, and the closing cor. of secs. 18 and 19.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/4 sec. cor., of sec. 18, with brass cap mkd.

| |
|------|
| 1/4 |
| S 18 |

1937

raise a mound

of stone, 2 ft. base, 1 1/2 ft. high, E. of cor.

40.09 The 1/4 sec. cor., a sandstone, 12x8x3 ins., set firmly and mkd. 1/4 on W. face.

At point for cor.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground with original marked stone alongside for 1/4 sec. cor. of sec. 13, with brass cap mkd.

| |
|------|
| 1/4 |
| S 13 |

1937

raise a mound

of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

77.34 The closing cor. of secs. 18 and 19, hereinafter described.


78.10 A branch of Halfway Hollow, 30 lks. wide, 6 ft. deep, drains SE.

80.12 The cor. of secs. 13 and 24, a sandstone, 12x12x9 ins. firmly set and mkd. with 3 notches on S edge and 3 notches on N edge.

DEPENDENT RESERVE OF THE EAST BOUNDARY OF T. 5 S., R. 19 E.

Chains

At point for cor. of the E. bdy. of sec. 13 and 24, set an iron post, 3 ft. long, 2 in. diam., 27 ins. in the ground with the original marked stone alongside for cor. of secs. 13 and 24, with brass cap mkd.



1937

raise a mound

of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Land, rolling and broken.

Soil, rocky and sandy; 3rd and 4th rate.

No timber.


Undergrowth, shadscale and sagebrush.

Poor grazing land.

South, along E. bdy. of sec. 24.

37.21 At midpoint bet. the closing cor. of secs. 18 and 19, and the closing cor. of secs. 19 and 30.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/4 sec. cor. for sec. 19, with brass cap mkd.




raise a mound

of stone, 2 ft. base, 1 1/2 ft. high, E. of cor.

39.96 The 1/4 sec. cor., a sandstone, 16x9x4 ins., firmly set, and mkd. 1/4 on W. face.

At point for cor.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground with the original mkd. stone alongside, for 1/4 sec. cor. of sec. 24, with brass cap mkd.



raise a mound

of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

77.20 The closing cor. of secs. 19 and 30, hereinafter described.

DEPENDENT RESURVEY OF THE EAST BOUNDARY OF T. 5 S. R. 19 E.

Chains

enind

80.16

The cor. of secs. 24 and 25, a sandstone, 6x8x6 ins., firmly set and mkd. 2 notches on S. and 4 notches on N. and in a mound of stone W. of cor. At point for cor.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground with the original marked sandstone alongside for cor. of secs. 24 and 25, with brass cap mkd.

1935

R19E R20E

S24

S30

S25

1937

renew mound

of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Land, rolling and broken.

Soil, sandy and rocky; 4th rate.

No timber.

Undergrowth, sagebrush, shadscale and grass.

Fair grazing land.

South, along E. bdy. of sec. 25.

9.50

An ungraded road, bears NW. and SE.

37.03

At midpoint between closing cor. of secs. 19 and 30, and the closing cor. of secs. 30 and 31.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground for 1/2 sec. cor. for sec. 30, with brass cap mkd.

S 30

1937

raise a mound

of stone, 2 ft. base, 1 1/2 ft. high, E. of cor.

39.88

The 1/2 sec. cor., a sandstone, 25x9x5 ins., firmly set and mkd. 1/2 on W. face, with mound of stone W. of cor.

At point for cor.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with the original marked stone alongside for 1/2 sec. cor. of sec. 25, with brass cap mkd.

S25

1937

DEPENDENT RESURVEY OF THE EAST BOUNDARY OF T. 5 S., R. 19 E.

Chains

renew mound

of stone, 2 ft. base, 1 1/2 ft. high, west of cor.

77.02 The closing cor. of secs. 30 and 31, T. 5 S., R. 20 E.

79.90 The original cor. of secs. 25, 30, 31 and 36, which is a sandstone, 10x6x4 ins., firmly set, mkd. 1 notch on S. and 5 notches on N. edges, witnessed by a mound of stone W. of cor.

At cor. point.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, with the original cor. monument deposited alongside, for the cor. of secs. 25 and 36, with brass cap mkd.

| | |
|-------|------|
| T5S | T5S |
| R19E | R20E |
| S25 | |
| ----- | |
| | S31 |
| S36 | |

1937

renew mound

of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Land, rolling.

Soil, sandy and rocky; 4th rate.

Undergrowth, sagebrush and shadscale.

No timber.

Fair grazing land.

South, on the E. bdy. of sec. 36.

37.12 At a point 40.00 chains south of the closing cor. of secs. 30 and 31.

Set an iron post, 3 ft. long, 1 1/2 in. diam., 27 ins. in the ground, for 1/4 sec. cor. of sec. 31, with brass cap mkd.

S 31

1937

raise a mound

of stone, 2 ft. base, 1 1/2 ft. high, E. of cor.

39.95 The 1/4 sec. cor., a sandstone, 8x8x8 ins., firmly set, and mkd. 1/4 on the W. face.

Chains

Chains

At point for cor.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground with the original mkd. stone alongside for $\frac{1}{4}$ sec. cor. with brass cap mkd.

$\frac{1}{4}$

S36

1937

raise a mound

of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

80.25

The standard cor. of T. 5 S., Rs. 19 and 20 E., heretofore described.

Land, rocky, broken and rolling.

Soil, red clay and sandy; 3rd and 4th rate.

No timber.

Undergrowth, sagebrush, shadscale and cotton brush.

Poor grazing land.

SUBDIVISION OF T. 5 S., R. 20 E.

From the cor. of secs. 25, 30, 31 and 36, on the E. bdy. of the Tp. hereinafter described.

West bet. secs. 25 and 36.

40.00

Set temp. $\frac{1}{4}$ sec. cor.

80.00

Set temp. cor. of secs. 25, 26, 35 and 36.

From the temp. cor. of secs. 25, 26, 35 and 36.

S. $0^{\circ}01'E.$, on random line, bet. secs. 35 and 36.

40.00

Set temp. $\frac{1}{4}$ sec. cor.

80.44

Intersect S. bdy. of Tp. 6 lks. E. of the standard cor. of sections 25 and 36, heretofore described.

Thence from the standard cor. of secs. 35 and 36.

N. $0^{\circ}01'W.$, bet. secs. 35 and 36

Over rolling and broken desert, through medium dense undergrowth; desc. gentle N. slope 50 ft.

SUBDIVISION OF TOWNSHIP 5 SOUTH, RANGE 20 EAST

Chains

- 11.10 Wash, 20 lks. wide, 3 ft. deep, in draw, drains W.; asc. S. slope.
- 14.10 Spur, 30 ft. above wash, projects W.; descend NW. slope.
- 25.90 Wash, 20 lks. wide and 4 ft. deep, drains S.70°W. about 3 chs. distant to junction with wash draining S.50°W.
- 28.30 Wash, 30 lks. wide, 7 ft. deep, in draw, 45 ft. below spur, drains S.50°W.
- 29.40 U. S. Highway No. 40 bears N.48-3/4°E. to Vernal, Utah, and S.55°30'W. to Gusher, Utah; asc. abrupt SE. slope.
- 35.20 Edge of bench bears N.50°E. and S.50°W.; thence asc. over rolling top of bench.
- 40.44 63 ft. above wash.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/4 sec. cor., with brass cap mkd.

1/4
S35 | S36
1937

raise a mound

of stone, 4 ft. base, 2 1/2 ft. high, W. of cor.

- 78.10 Spur, 115 ft. above 1/4 sec. cor., projects S.60°W.
- 80.44 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 25, 26, 35 and 36, with brass cap mkd.

T5S R20E
S26 | S25

S35 | S36
1937

raise a mound

of stone, 4 ft. base, 2 1/2 ft. high, W. of cor.

Land, broken and rolling desert, general SW. exposure and drainage.

Soil, coarse sandy clay and sandstone surface rock; 3rd and 4th rate.

Undergrowth, scattered cotton brush, sagebrush and shadscale.

No timber.

Fair grazing land.

From the cor. of secs. 25, 30, 31 and 36 on the E. bdy. of the township, which is an iron post, 2 ins. diam., set, mkd. and witnessed as described in official record.

West, on a sectional correction line, bet. secs. 25 and 36.

SUBDIVISION OF TOWNSHIP 5 SOUTH, RANGE 20 EAST.

Chains

chains

- Over rolling and broken desert through medium dense undergrowth; asc. abrupt E. slope 200 ft.
- 13.90 East edge of mesa, bears N.30°W. and S.30°E.
- 22.00 West edge of mesa bears North and South; desc. W. slope.
- 40.03 235 feet below West edge of mesa.
Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground for $\frac{1}{4}$ sec. cor., with brass cap marked
- S 25
- S 36
- 1937
- raise a mound
- of stone, 4 ft. base, 2 $\frac{1}{2}$ ft. high, N. of cor.
- 51.80 Wash, 20 lks. wide, 4 ft. deep, drains S.20°W., in draw, 80 ft. below $\frac{1}{4}$ sec. cor.
- 52.30 U. S. Highway No. 40 bears N.21 $\frac{1}{2}$ °E. to Vernal, Utah, and S.21 $\frac{1}{2}$ °W. to Gusher, Utah; asc. E. slope.
- 75.10 Spur, 115 ft. above wash, projects S.60°W.; desc. gentle W. slope, 15 ft.
- 80.06 The cor. of secs. 25, 26, 35 and 36.
Land, broken and rolling desert; general S. exposure and drainage.
Soil, coarse sandy clay, with sandstone surface rock; 3rd and 4th rate.
No timber.
Undergrowth, scattered cotton brush, shadscale and sagebrush.
Poor grazing land.
- N.0°01°W., bet. secs. 25 and 26.
- Over rolling and broken desert; through medium dense undergrowth; desc. NW. slope.
- 4.20 Wash, 15 lks. wide, 3 ft. deep, in draw, 95 feet below sec. cor., drains S.30°W.; asc. southerly slope.
- 39.10 Spur, 105 ft. above wash, projects S.60°W.; desc. northerly slope.
- 40.00 10 ft. below spur.
Set an iron post, 5 ft. long, 1 in. diam., 10 ins. in the ground to bedrock, with a limestone, 8x6x2 ins., mkt. X, deposited at the base, and in a mound of stone, 4 ft. base to top, for $\frac{1}{4}$ sec. cor., with brass cap mkt.

SUBDIVISION OF TOWNSHIP 5 SOUTH, RANGE 20 EAST

Chains

- 50.00 Old road bears NE. and SW.
- 51.00 Wash, 10 lks. wide and 2 ft. deep, in draw, 50 ft. below $\frac{1}{4}$ sec. cor., drains SW.; asc. S. slope.
- 57.40 Spur, 70 ft. above wash, projects S. 70°W.; desc. NW. slope
- 65.20 Wash, 30 lks. wide, 4 ft. deep, in draw, 65 ft. below spur, drains SW.; asc. slight S. slope.
- 80.00 20 ft. above wash.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 23, 24, 25, and 26, with brass cap mkd.

| | |
|-----|------|
| T5S | R20E |
| S23 | S24 |
| S26 | S25 |

1937

raise a mound

of stone, 4 ft. base, 2 $\frac{1}{2}$ ft. high, W. of cor.

Land, broken and rolling desert, general SW. exposure and drainage.

Soil, coarse sandy clay and sandstone surface rock; 3rd and 4th rate.

No timber.

Undergrowth, medium dense to scattered sagebrush, shadscale and cotton brush.

Fair to poor grazing land.

East on a random line bet: secs. 24 and 25.

- 40.00 Set temp. $\frac{1}{4}$ sec. cor:
- 79.98 Intersect E. bdy. of township 5 lks. N. of cor. of secs. 19, 24, 25, and 30, which is an iron post, 2 ins. diam., set, mkd., and witnessed as described in the official record.
- Thence
- N. 89°58'W., on true line bet. secs. 24 and 25.
- Over rolling and broken desert through medium dense undergrowth; desc. W. slope 110 ft.
- 12.80 Wash, 30 lks. wide, 7 ft. deep, drains S. 10°W.
- 14.60 U. S. Highway No. 40 bears N. 9 $\frac{1}{4}$ °E. to Vernal, Utah, and S. 9 $\frac{1}{4}$ °W. to Gusher, Utah; asc. E. slope.
- 30.10 Wash, 10 lks. wide, 1 ft. deep, drains S. 60°E., 40 ft. above previous wash. Continue to asc. E. slope..
- 30.90 Old road, bears N. 60°W., and S. 60°E.

SUBDIVISION OF TOWNSHIP 5 SOUTH, RANGE 20 EAST

Chains

39.99 77 ft. above wash on N. end of spur sloping North.
Set an iron post, 3 ft. long, 1 in. diam., on cross mkd. on exposed sandstone bedrock and in a mound of stone 6 ft. base, to top, for 1/4 sec. cor., with brass cap mkd.

1/4 S24
S25

1937

Desc. W. slope.

50.50 Old road, bears N. 60°E. and SW.,

57.80 Wash, 75 ft. below 1/4 sec. cor., 10 lks. wide, 4 ft. deep, drains SW.

60.20 Spur, 5 ft. above wash, projects S. 70°W.; desc. westerly slope 55 ft.

79.98 The cor. of secs. 23, 24, 25, and 26.

Land, rolling and broken desert; general SW. exposure and drainage.

Soil, coarse sandy clay; 3rd rate with sandstone surface rock.

Undergrowth, scattered shadscale, cotton brush, and sage brush.

No timber.

Poor to fair grazing land.

N. 0°01'W., bet. secs. 23 and 24.

Over rolling and broken desert, through medium dense undergrowth; asc. SW. slope.

10.60 Spur, 15 ft. above sec. cor., projects West; desc. NW. slope.

23.00 Main wash, 50 ft. below spur, 60 lks. wide, 6 ft. deep, drains S. 80°W.; asc. southerly slope.

26.80 Spur, 45 ft. above wash, projects SW.; over broken westerly slope.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 16 ins. in the ground to bedrock, with a sandstone 6x4x3 ins.; mkd. X, deposited at the base, and in a mound of stone 4 ft. base to top, for 1/4 sec. cor., with brass cap mkd.

S23 | S24

1937

43.00 Wash, 15 ft. below 1/4 sec. cor., 25 lks. wide, 3 ft. deep, drains SW.; asc. steep SW. slope.

43.10 Asc. becomes gradual.

80.00 80 ft. above wash.

SUBDIVISION OF TOWNSHIP 5 SOUTH, RANGE 20 EAST

Chains

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 13, 14, 23, and 24, with brass cap mkd.

| | |
|-----|------|
| T5S | R20E |
| S14 | S13 |
| S23 | S24 |

1937

raise a mound

of stone, 4 ft. base, 2½ ft. high, W. of cor.

Land, broken and rolling desert; general SW. exposure and drainage.

Soil, coarse sandy clay; 3rd rate, and sandstone surface rock.

No timber.

Undergrowth, medium dense to scattered sagebrush, cotton brush, and shadscale.

Fair to poor grazing land.

S. 89°58'W. on random line bet. secs. 13 and 24.

40.00 Set temp. sec. cor.

79.00 Intersect E. bdy. of township 23 lks. N. of cor. of secs. 13, 14, 19, and 24, which is an iron post 2 ins. diam., set, mkd., and witnessed as described in the official record.

Thence

N. 89°48'W., on true line bet. secs. 13 and 24.

Over rolling and broken desert, through medium dense undergrowth; asc. abrupt E. slope.

5.80 Wide spur, 115 ft. above sec. cor., projects South; desc. SW. slope.

15.20 Wash, 10 lks. wide, 3 ft. deep, in draw, 145 ft. below spur, drains S. 30°W.; asc. SE. slope.

20.90 Spur, 70 ft. above wash, projects SW.; desc. westerly slope.

34.70 Wash, 225 ft. below spur, 20 lks. wide, 4 ft. deep, drains SW.; asc. E. slope.

39.20 Top of ascent, 45 ft. above wash, bears N. and S.; desc. West slope.

39.98 15 ft. below top of asc.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for sec. cor., with brass cap mkd.

SUBDIVISION OF TOWNSHIP 5 SOUTH, RANGE 20 EAST

| Chains | |
|--------|---|
| | <p style="text-align: center;"> $\frac{1}{4}$ $\frac{S13}{S24}$ ✓ 1937 </p> <p style="text-align: right;">raise a mound</p> <p>of stone, 4 ft. base, 2½ ft. high, N. of cor. Desc. SW. slope, 25 ft.</p> |
| 52.90 | Main wash, 1.10 chs. wide, 4 ft. deep, drains SE; asc. southeasterly slope. |
| 55.10 | Old road, bears N. 70°E. and S. 60°W. |
| 62.30 | Spur, 100 ft. above wash, projects S. 60°W.; desc. westerly slope. |
| 79.96 | 75 ft. below spur. The cor. of secs. 13, 14, 23, and 24. Land, broken and rolling desert; general south exposure and drainage. Soil, coarse sandy clay; 3rd rate with sandstone surface rock. Undergrowth, medium dense to scattered sagebrush, cotton brush and shadscale. No timber. Fair to poor grazing land. |
| | _____ |
| | N. 0°01'W., bet. secs. 13 and 14. Over rolling and broken desert, through medium dense undergrowth; asc. gentle SW. slope. |
| 34.10 | Asc. steep SW. slope. |
| 40.00 | 200 ft. above sec. cor. Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground to bedrock with a sandstone 12x5x3 ins. mkd. X deposited at the base, and in a mound of stone 5 ft. base to top for ¼ sec. cor. with brass cap mkd. $\frac{1}{4}$ S14 S13 1937 |
| | Asc. abrupt SW. slope. |
| 44.00 | Spur, 70 ft. above ¼ sec. cor., projects SE.; desc. NE. slope. |
| 80.00 | 190 ft. below spur. Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground for cor. of secs. 11, 12, 13, and 14, with brass cap mkd. |

SUBDIVISION OF TOWNSHIP 5 SOUTH, RANGE 20 EAST

Chains

| | |
|------|------|
| T5S | R20E |
| S11 | S12 |
| S14 | S13 |
| 1937 | |

raise a mound

of stone, 4 ft. base, 2½ ft. high, W. of cor.

Land, rough, broken and rolling desert.

Soil, coarse sandy clay; 3rd rate, with sandstone surface rock.

Undergrowth, medium dense to scattered sagebrush, cotton brush, shadscale, and very scattered greasewood.

No timber.

Fair to poor grazing land.

S. 89°40'E. on random line bet. secs. 12 and 13.

40.00 Met temp. ¼ sec. cor.

79.90 Intersect E. bdy. of township 5 lks. N. of cor. of secs. 7, 12, 13, and 14 which is an iron post, 2 ins. diam., set, mkd., and witnessed as described in the official record.

Thence

N. 89°40'W. on true line bet. secs. 12 and 13.

Over broken and rolling desert through medium dense undergrowth; asc. easterly slope 25 ft.

12.00 Spur projects S. 30°W.; desc. westerly slope.

30.90 Wash, 20 lks. wide, 4 ft. deep, 95 ft. below spur, drains E. 30°W.; asc. E. slope.

39.95 35 ft. above wash.

3 ft. long
Set an iron post, 1 in. diam., 27 ins. in the ground, for ¼ sec. cor., with brass cap mkd.

| | |
|---|-----|
| ¼ | S12 |
| ¼ | S13 |

1937

raise a mound

of stone, 3 ft. base, 3 ft. high, N. of cor.

Note! From this point, a reservoir, 2½ chs. diam., bears S. 20°50'E.

Continue to asc. E. slope.

50.50 Spur, 170 ft. above ¼ sec. cor., projects South; desc.

SUBDIVISION OF TOWNSHIP 5 SOUTH, RANGE 30 EAST

| Chains | | 501430 |
|--------|--|--------|
| | NW. slope | |
| 50.71 | Reservoir bears S. 48°30'E. | |
| 59.60 | Wash, 20 lks. wide, 2 ft. deep, in draw 135 ft. below spur drains S. 70°W.; asc. SE. slope. | |
| 64.20 | Spur, 65 ft. above wash, projects S.30°W.; desc. W. slope. | |
| 78.20 | Wash, 50 lks. wide, 5 ft. deep, 205 ft. below spur, drains S. 30°E. | |
| 79.90 | The cor. of secs. 11, 12, 13, and 14. | |
| | Land, broken and rolling desert general south exposure and drainage. | |
| | Soil, coarse sandy clay; 3rd rate, with sandstone surface rock. | |
| | Timber, scattered juniper. | |
| | Undergrowth, medium to scattered cotton brush, sagebrush, and shadscale. | |
| | Fair to poor grazing land. | |
| | _____ | |
| | N. 0°01'W. bet. secs. 11 and 12. | |
| | Over rolling and broken desert, through medium dense to scattered undergrowth. | |
| 3.10 | Main wash, 50 lks. wide, 5 ft. deep, drains S. 30°E.; asc. southerly slope. | |
| 29.10 | Spur, 210 ft. above wash, projects SW., desc. NW. slope. | |
| 33.50 | Wash, 20 lks. wide, 3 ft. deep, in draw, 65 ft. below spur drains S. 60°W.; asc. abrupt SE. slope. | |
| 40.00 | 85 ft. above wash on wide spur projecting S. 40°W. | |
| | Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd. | |
| | | |
| | 1937 | |
| | raise a mound | |
| | of stone, 3 ft. base, 3 ft. high, W. of cor.; desc. NW. slope. | |
| 57.50 | Wash, 20 lks. wide, 2 ft. deep, in draw, 150 ft. below $\frac{1}{4}$ sec. cor., drains S, 30°W.; asc. SE. slope. | |
| 66.90 | Spur, 185 ft. above wash, projects S. 30°W.; desc. NW. slope. | |
| 80.00 | 35 ft. below spur on abrupt NW. slope. | |
| | Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 1, 2, 11, and 12, with brass cap mkd. | |

SUBDIVISION OF TOWNSHIP 5 SOUTH, RANGE 20 EAST

Chains

| | |
|------|------|
| T5S | R20E |
| S2 | S1 |
| .S11 | S12 |

.1937

raise a mound

of stone, 2 ft. base, 1½ ft. high W. of cor.

Land, rough broken desert; general SW. exposure and drainage.

Soil, coarse sandy clay; 3rd rate, with sandstone surface rock.

Timber, scattered juniper.

Undergrowth, shadscale, sagebrush, and cotton brush.

Fair to poor grazing land.

S. 89°46' E. on random line bet. secs. 1 and 12.

40.00 Set temp. ¼ sec. cor.

79.94 Intersect E. bdy. of township at the cor. of secs. 1, 6, 7, and 12. which is an iron post, 2 ins. diam., set, mkd. and witnessed as described in the official record.

Thence

N. 89°46' W. on true line bet. secs. 1 and 12.

Over broken and rolling desert through medium dense to scattered shadscale, sagebrush, and cotton brush, and scattered juniper; desc. westerly slope 40 ft.

6.00 Wash, 10 lks. wide, 2 ft. deep, drains SW. asc. SE. slope

8.60 Low spur, 20 ft. above wash, projects SW.; desc. NW. slope

11.60 Wash, 10 lks. wide, 2 ft. deep, in draw 20 ft. below spur, drains SW.; asc. SE. slope.

24.40 Spur, 160 ft. above wash, projects S. 40°W.; desc. NW. slope.

35.00 Wash, 10 lks. wide, 1 ft. deep, in draw, 105 ft. below spur drains S. 50°W.; asc. SE. slope.

39.97 65 ft. above wash on spur projecting S. 30°W.

Set an iron post, 3 ft. long, 1 in. diam., 14 ins. in the ground to bed rock with a sandstone 8x6x4 ins. mkd. X deposited at the base and in a mound of stone 4 ft. to top, for ¼ sec. cor., with brass cap mkd.

S1

S12

1937

Descend NW. slope.

SUBDIVISION OF TOWNSHIP 5 SOUTH, RANGE 90 EAST

Chains

- 46.10 Head of draw, 75 ft. below spur, drains SW.; asc. SE. slope about 8 chains,
- 52.50 Spur, 60 ft. above head of draw, projects SW./thence southerly; desc. NW. slope.
- 60.70 Wash, 20 lks. wide, 3 ft. deep, in draw, 205 ft. below spur, drains SW.; asc. SE. slope.
- 73.80 Spur, 105 ft. above wash, projects SW.; desc. NW. slope.
- 79.94 75 ft. below spur

The cor. of secs. 1, 2, 11, and 12.

Land, broken and rolling desert, general SW. exposure and drainage.

Soil, coarse sandy clay; 3rd rate.

Timber, scattered juniper;

Undergrowth, scattered shadscale, sagebrush, and cotton brush.

Fair to poor grazing land.

N. 0°01'W., on a random line bet. secs. 1 and 2.

- 40.00 Set temp. $\frac{1}{4}$ sec. cor.

- 78.05 Intersect N. bdy. of the township at the cor. of secs. 1, 2, 35, and 36, heretofore described.

Thence

S. 0°01'E., on true line bet. secs. 1 and 2.

Over rolling and broken desert, through medium dense to scattered undergrowth and scattered juniper.

Desc. S. slope 35 ft.

- 9.10 Wash, 10 lks. wide, 1 ft. deep, in draw, drains S. 30°W.; asc. NW. slope.

- 12.00 Spur, 10 ft. above wash, projects S. 30°W. 4 chains distant; desc. SE. slope.

- 15.30 Wash, 10 lks. wide, 2 ft. deep, in draw 15 ft. below spur, drains S. 70°W. 2 chains to junction of washes, thence S. 30°W.; asc. NW. slope.

- 19.50 Spur, 15 ft. above wash, projects S. 50°W.; desc. SE. slope

- 30.50 Wash, 10 lks. wide, 3 ft. deep, in draw 65 ft. below spur, drains S. 60°W.; asc. slight NW. slope.

- 38.05 35 ft. above wash.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$\frac{1}{4}$ sec. cor.
S2 | S1

SUBDIVISION OF TOWNSHIP 5 SOUTH, RANGE 20 EAST.

Chains

- raise a mound
of stone, 4 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
Continue to asc. slight NW. slope.
- 41.40 Spur, 40 ft. above wash, projects SW.; desc. SE. slope.
- 47.30 Wash, 10 lks. wide, 2 ft. deep, in draw, 50 ft. below spur, drains S. 30° W.; asc. NW. slope.
- 50.20 Spur, 30 ft. above wash, projects SW.; desc. SE. slope.
- 59.30 Wash, 10 lks. wide, 1 ft. deep, in draw, 45 ft. below spur, drains SW.; asc. NW. slope.
- 69.10 Spur, 45 ft. above wash, projects SW.; desc. SE. slope.
- 75.40 Wash, 20 lks. wide, 3 ft. deep, in draw, 195 ft. below spur, drains SW.; asc. S. slope.
- 78.05 60 ft. above wash, on abrupt NW. slope.
- The cor. of secs. 1, 2, 11 and 12.
- Land, broken, and rolling desert; general SW. exposure and drainage.
- Soil, coarse sandy clay; 3rd rate.
- Timber, scattered juniper.
- Undergrowth, scattered shadscale, sagebrush and cotton brush.
- Fair grazing land.
-
- From the cor. of secs. 25, 26, 35 and 36.
- West, bet. secs. 26 and 35.
- 40.00 Set temp. $\frac{1}{4}$ sec. cor.
- 80.00 Set temp. cor. of secs. 26, 27, 34 and 35.
- Thence from the cor. of secs. 26, 27, 34 and 35.
- S. $0^{\circ}02'E$. on a random line bet. secs. 34 and 35.
- 40.00 Set temp. $\frac{1}{4}$ sec. cor.
- 81.01 Intersect S. bdy. of Tp. 2 lks, W. of the standard cor. of secs. 34 and 35, heretofore described.
- Thence from the standard sec. cor.
- N. $0^{\circ}02'W$., bet. secs. 34 and 35.
- Over nearly level desert land.
- 3.80 Abandoned highway bears N. $70^{\circ}E$. and S. $70^{\circ}W$.
- 8.50 U. S. Highway No. 40 bears N. $71\frac{1}{2}^{\circ}E$. to Vernal, Utah, and S. $71\frac{1}{2}^{\circ}W$. to Gusher, Utah.
- 17.20 An ungraded road bears N. $60^{\circ}W$. and S. $60^{\circ}E$.
- 41.01 Set an iron post, 3 ft. long, 1 in. diam., 25 ins. in the ground and underlying rock, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

S34|S35

1937

raise a mound

SUBDIVISION OF TOWNSHIP 5 SOUTH, RANGE 20 EAST.

- Chains
- of stone, 2 ft. base, 1½ ft. high, W. of cor.
 - The ¼ sec. cor. is 50 ft. above sec. cor.
 - Thence
 - 41.20 Over rolling to rough desert land draining generally E.
 - 49.30 Dry wash, 13 lks. wide, 2 ft. deep, 10 ft. below ¼ sec. cor., drains generally E.
 - 57.50 Over rolling to rough land draining generally SE.
 - 60.90 Abandoned road bears irregularly E. and SW.
 - 71.60 Over point of bench, 65 ft. above wash, land extends 1 chain E.
 - 75.80 Desc. 50 ft. over steep N. slope.
 - 78.20 Desc. 15 ft. over gradual N. slope, to sec. cor.
 - 81.01 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 26, 27, 34 and 35, with brass cap mkd.

| | |
|----------|-----|
| T5S R20E | |
| S27 | S26 |
| S34 | S35 |

1937

raise a mound

of stone, 3 ft. base, 2 ft. high, W. of cor.

Land, rolling and rough.

Soil, sandy loam and clay loam; 2nd to 4th rate.

No timber.

Undergrowth, very scattered cotton brush, shadscale and sagebrush.

Fair grazing land.

From the cor. of secs. 25, 26, 35 and 36.

West on the sectional correction line, bet. secs. 26 and 35.

Over rolling desert through medium dense undergrowth; descend gentle W. slope.

- 5.00 Desc. steep W. slope
- 11.80 Wash, 12 lks. wide, 4 ft. deep, in draw, 90 ft. below sec. cor. drains S.30°W.; asc. SE. slope.
- 17.10 Spur, 35 ft. above wash, projects S.30°E.; desc. SW. slope.
- 27.10 Descent becomes abrupt.
- 35.90 Main wash, 130 lks. wide, 6 ft. deep, 85 ft. below spur, drains S.; asc. SE. slope.
- 39.20 Abandoned road, bears N.15°E., and irregularly SW.

SUBDIVISION OF TOWNSHIP 5 SOUTH, RANGE 20 EAST

Chains
39.99

10 ft. above main wash.
Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground for $\frac{1}{4}$ sec. cor. with brass cap. mkd.

$\frac{1}{4}$ S26

S35

1937

raise a mound
of stone, 3 ft. base, 3 ft. high, N. of cor.

Continue to asc. SE. slope.

42.20 Spur, 20 ft. above $\frac{1}{4}$ sec. cor., slopes S. 30° E. 1 chain distant; desc. SW. slope.

48.00 Wash, 40 lks. wide, 7 ft. deep, 15 ft. below spur, drains S. 60° E.; gentle asc. over rolling land.

79.98 The cor. of secs. 26, 27, 34, and 35.

Land, broken and rolling desert, general S^w. exposure and drainage.

Soil, coarse sandy clay; 3rd rate, with sandstone surface rock.

No timber.

Undergrowth, medium to scattered sagebrush, cotton brush and shadscale.

Fair to poor grazing land.

N. 0°02' W., bet. secs. 26 and 27.

Over nearly level land.

5.00 Dry wash, 12 lks. wide, 3 ft. deep, drains SE.

12.80 Dry wash, 16 ft. below sec. cor., 20 lks. wide, 3 $\frac{1}{2}$ ft. deep drains SE.

20.40 Base of steep slope, bears irregularly SE. and W.; asc. S. slope.

21.70 Edge of bench land, 40 ft. above wash; asc. ^{over} rolling bench land.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$\frac{1}{4}$
S27 | S26

1937

raise a mound
of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.

45.00 Land, drains generally E.

70.00 Land, becomes slightly broken.

SUBDIVISION OF TOWNSHIP 5 SOUTH, RANGE 20 EAST

Chains

74.60 Top of asc. 12 ft. above $\frac{1}{4}$ sec. cor., bears NW. and SE.; desc. N. slope.

77.00 Base of steep slope, 60 ft. below top of asc.; desc. 10 ft. over NE. slope.

80.00 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 22, 23, 26, and 27, with brass cap mkd.

| | |
|-----|------|
| T5S | R20E |
| S22 | S23 |
| S27 | S26 |

1937

raise a mound

of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

Land, rolling bench broken and rocky.

Soil, deep coarse sand and rocky; 3rd and 4th rate.

No timber.

Undergrowth, sagebrush and shadscale.

Fair grazing land.

East on a random line bet. secs. 23 and 26,

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.04 Intersect the cor. of secs. 23, 24, 25, and 26.

Thence

on true line,

West, bet. secs. 23, and 26.

Over rolling southwesterly slope.

5.70 Desc. steep W. slope.

10.00 Dry wash, 70 ft. below sec. cor., 60 lks. wide, $2\frac{1}{2}$ ft. deep, drains S.; asc. steep E. slope.

12.80 Top of steep slope, 60 ft. above wash, over rolling bench land.

40.02 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

| | |
|---------------|-----|
| $\frac{1}{4}$ | S23 |
| | S26 |

1937

raise a mound

of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

45.60 Edge of bench land, bears NE. and SW.; desc. steep W. slope.

SUBDIVISION OF TOWNSHIP 5 SOUTH, RANGE 20 EAST

| Chains | Canyon, 50 ft. below $\frac{1}{4}$ sec. cor. drains SW. 8 chains to creek bed; asc. steep E. slope. |
|--------|--|
| 50.60 | Spur, 50 ft. above canyon, projects SW.; desc. W. slope. |
| 60.00 | Dry wash, 70 ft. below spur, 150 lks. wide, 2 ft. deep, drains S. 15°E.; over nearly level land. |
| 61.90 | Base of steep E. slope. |
| 64.30 | Top of steep slope, 60 ft. above wash; over rough rocky land, draining irregularly N. |
| 80.04 | The cor. of secs. 22, 23, 26, and 27. |
| | Land, rough broken and gently rolling. |
| | Soil, rocky, and coarse loose sand; 3rd and 4th rate. |
| | No timber. |
| | Undergrowth, sagebrush and shadscale. |
| | Poor grazing land. |
| | N. 0°02'W., bet. secs. 22 and 23. |
| | Desc. 25 ft. over northwesterly slope. |
| 4.10 | Draw, 80 lks. wide, 2 ft. deep, drains SE., over nearly level land. |
| 9.60 | Asc. 50 ft. over SW. slope to |
| 11.70 | Asc. 30 ft. over rolling and broken land, draining generally SW. |
| 33.20 | Asc. 30ft. over rolling land draining generally SE. |
| 40.00 | Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground for $\frac{1}{4}$ sec. cor., with brass cap mkd. |
| | $\begin{array}{c} \frac{1}{4} \\ S22 \quad \quad S23 \end{array}$ |
| | 1937 |
| | raise a mound |
| | of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor. |
| 41.00 | Over rolling desert land, draining generally W. |
| 80.00 | Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 14, 15, 22, and 23, with brass cap mkd. |
| | $\begin{array}{cc} T5S & R20E \\ S15 & & S14 / \\ \hline S22 & & S23 \end{array}$ |
| | 1937 |
| | raise a mound |

SUBDIVISION OF TOWNSHIP 5 SOUTH, RANGE 20 EAST

Chains

of stone, 2 ft. base, 1½ ft. high, W. of cor.
 Land, gently rolling. Soil, loose, coarse sand; 3rd rate.
 No timber.
 Undergrowth; sagebrush, shadscale, and Russian thistle.
 Fair grazing land.

East, on random line bet. secs. 14 and 23.

40.00 Set temp. ¼ sec. cor.

80.06 Intersect N. and S. line, 5 lks. S. of the cor. of secs. 13, 14, 23, and 24.

Thence

S. 89°58'W.; on true line bet. secs. 14 and 23.


Desc. over gentle southwesterly slope.

20.00 Dry wash, 30 ft. below sec. cor., 12 lks. wide, 3 ft. deep, drains S. 15°E.; asc. rolling easterly slope.

30.00 Spur, 40 ft. above wash, projects S. 15°E. 15 chains; desc. SW. slope.

36.30 Dry wash, 50 ft. below spur, 15 lks. wide, 2 ft. deep, drains South 30°E.; asc. 20 ft. over E. slope to ¼ sec. cor.

40.03 Set an iron post, 3 ft. long, 1 in. diam. 27 ins. in the ground for ¼ sec. cor., with brass cap mkd.



raise a mound

of stone, 2 ft. base, 1½ ft. high, N. of cor.

75.00 Top of asc. 70 ft. above ¼ sec. cor., bears NW. and SE., desc. 20 ft. over SW. slope.

80.06 The cor. of secs. 14, 15, 22, and 23.

Land, rolling desert,

Soil, loose, coarse sand; 3rd rate.

No timber.

Undergrowth, sagebrush, and shadscale.

Fair to poor grazing land.

SUBDIVISION OF TOWNSHIP 5 SOUTH, RANGE 20 EAST

Chains


N. 0°08'W. bet. secs. 14 and 15.

Over rolling land, draining generally SW.

25.00 Top of asc. 40 ft. above sec. cor; desc. 20 ft. over rolling land, draining generally E.

35.00 Over nearly level land.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground for $\frac{1}{4}$ sec. cor., with brass cap mkd.




raise a mound

of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

75.00 Over rolling land; draining SW.

80.00 20 ft. above $\frac{1}{4}$ sec. cor.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 10, 11, 14, and 15, with brass cap mkd.



raise a mound

of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

Land, rolling.

Soil, sandy and sandy loam; 3rd rate.

No timber.

Undergrowth, sagebrush and shadscale.

Fair to good grazing land.

N. 89°58'E., on random line, bet. secs. 11 and 14.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.02 Intersect the cor. of secs. 11, 12, 13, and 14.

Thence

S. 89°58'W. on true line bet. secs. 11 and 14.

Asc. 90 ft. over broken irregular northeasterly slope.

9.70 Over rough broken upland.

22.70 Desc. 70 ft. over rough broken southwesterly slope.

SUBDIVISION OF TOWNSHIP 5 SOUTH, RANGE 20 EAST

| | |
|--------|--|
| Chains | Thence |
| 32.00 | Over rolling land draining generally south. |
| 40.01 | Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground for $\frac{1}{4}$ sec. cor., with brass cap mkd. |
| | $\frac{1}{4}$ S11 <hr style="width: 50px; margin: auto;"/> S14 1937 |
| | raise a mound |
| | of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor. |
| 58.00 | Desc. 50 ft. over rolling land draining generally south. |
| | Thence |
| 77.50 | Over rolling land draining southwest. |
| 80.0 | The cor. of secs. 10, 11, 14 and 15. |
| | Land, rolling and rough broken. |
| | Soil, clay, sandy, and rocky; 4th rate. |
| | No timber. |
| | Undergrowth, sagebrush and shadscale. |
| | Poor grazing land. |
| | <hr style="width: 100px; margin: auto;"/> |
| | N. $0^{\circ}02'W.$, bet. secs. 10 and 11. |
| | Asc. 50 ft. over rolling southerly slope. |
| 11.20 | Desc. 40 ft. over north slope. |
| | thence |
| 22.00 | Draw, drains W./over rolling land, draining generally SW. |
| 33.40 | Asc. S. slope of knoll. |
| 35.10 | Crest of conical knoll, 75 ft. above draw; desc. 45 ft. over northerly slope. |
| 39.00 | Over rolling land. |
| 40.00 | Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd. |
| | S10 $\frac{1}{4}$ S11 1937 |
| | raise a mound |
| | of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor. |
| 71.60 | Asc. rough broken southwesterly slope. |
| 80.00 | On rough, rocky southwest slope, 140 ft. above $\frac{1}{4}$ sec. cor. |
| | Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground for cor. of secs. 2, 3, 10 and 11, with brass cap mkd. |

SUBDIVISION OF TOWNSHIP 5 SOUTH, RANGE 20 EAST

Chains

| | |
|-----|------|
| T5S | R20E |
| S3 | S2 |
| S10 | S11 |

1937

raise a mound

of stone, 5 ft. base, 2½ ft. high, W. of cor.

Land, rolling and rough broken.

Soil, sandy clay, sandy and rocky; 3rd rate to 4th rate.

No timber.

Undergrowth, shadscale and sagebrush.

Fair grazing land.

N. 89°58'E., bet. secs. 2 and 11, on a random line.

40.00 Set temp. ¼ sec. cor.

80.04 Intersect a N. and S. line 2 lks. N. of the cor. of secs. 1, 2, 11, and 12.

Thence

S. 89°58'W., on true line bet. secs. 2 and 11.

Desc. NW. slope.

3.10 Draw, 60 ft. below sec. cor., drains S. 30°W. 6 chains to junction of wash; asc. SE. slope.

8.60 Spur, 50 ft. above draw, projects S. 5 chains; desc. W. slope.

14.50 Wash, 40 ft. below spur, 20 lks. wide, 2 ft. deep, drains S. 30°E.; asc. steep E. slope.

21.50 Top of steep Easterly slope, 140 ft. above wash; asc. gentle E. slope.

33.40 Desc. 70 ft. over steep westerly slope.

40.02 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for ¼ sec. cor., with brass cap mkd.

S2

S11

1937

A forked juniper, 6 ins. diam., bears N. 76°E., .38 lks. dist., mkd. ¼S2BT,

Raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.

Cor. stands in a low saddle, at head of drainage to the S.

SUBDIVISION OF TOWNSHIP 5 SOUTH, RANGE 20 EAST

| Chains | |
|--------|---|
| 42.20 | Desc. irregular northwesterly slope. |
| 53.10 | Dry wash, 12 lks. wide, 1½ ft. deep, 50 ft. below ¼ sec. cor., drains irregularly S. |
| 58.60 | Center of reservoir dike, 20 lks. N. of line, extends E. 1 chain, and W. 1 chain, ; reservoir extends 2½ chains N.; asc. rolling irregular NE. slope. |
| 75.50 | Spur, 50 ft. above reservoir, projects SE.; desc. steep broken rocky, southwesterly slope. |
| 80.04 | 60 ft. below spur, the cor. of secs. 2, 3, 10, and 11. |
| | Land, rolling and rough. |
| | Soil, sandy clay and rocky; 3rd and 4th rate. |
| | Timber, scattering juniper. |
| | Undergrowth, sagebrush and shadscale. |
| | Fair to poor grazing land. |
| | N. 0°02'W. on random line bet. secs. 2 and 3. |
| 40.00 | Set temp. ¼ sec. cor. |
| 78.05 | Intersect N. bdy. of the township at the cor. of secs. 2, 3, 34 and 35, heretofore described. |
| | Thence |
| | S. 0°02'E. on true line bet. secs. 2 and 3. |
| | Over nearly level land. |
| 33.20 | Desc. 100 ft. over S. slope. |
| 38.05 | Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for ¼ sec. cor. with brass cap mkd. |
| | $ \begin{array}{c} \frac{1}{4} \\ S3 \quad \quad S2 \end{array} $ |
| | 1937 |
| | A juniper, 4 ins. in diam, bears N. 81¼°E., 100 lks. dist., mkd. ¼S2BT. |
| | A juniper, 4 ins. diam., bears N. 29½°W., 56 lks. dist., mkd. ¼S3BT. |
| 42.40 | Dry wash, 10 ft. below ¼ sec. cor., 10 lks. wide, 1½ ft. deep, drains SE.; over rolling land draining generally SE. |
| 67.70 | Asc. steep northeasterly slope. |
| 71.80 | Spur, 90 ft. above base of steep slope, projects SE., desc. 130 ft. over steep southwesterly slope. |
| 78.05 | The cor. of secs. 2, 3, 10, and 11. |
| | Land, rolling and broken. |
| | Soil, sandy clay and rocky; 3rd and 4th rate. |

SUBDIVISION OF TOWNSHIP 5 SOUTH, RANGE 20 EAST.

Chains

Timber, scattering juniper.
Undergrowth, sagebrush and shadscale.
Fair grazing land.

From the cor. of secs. 26, 27, 34 and 35.

West, bet. secs. 27 and 34.

40.00 Set temporary 1/2 sec. cor.

80.00 Set temp. cor. of secs. 27, 28, 33 and 34.

Thence from the temp. cor. of secs. 27, 28, 33 and 34, S.0°02'E., on a random line, bet. secs. 33 and 34.

40.00 Set temp. 1/2 sec. cor.

81.55 Intersect the standard cor. of secs. 33 and 34 on the S. bdy. of the Tp. heretofore described. Thence N.0°02'W., bet. secs. 33 and 34.

Asc. 10 ft. over rocky rolling land draining generally SE.

10.70 Base of steep asc., bears SW. and irregularly N.

37.20 Top of asc. 100 ft. above sec. cor. extends E. and irregularly S.; thence over bench land.

37.40 Draw, near head, 20 lks. wide, 2 ft. deep, 30 ft. below top of asc.; drains S.75°W.; asc. 10 ft.

39.25 Thence over gently rolling land, draining generally N.60°E.

41.55 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/2 sec. cor. with brass cap mkd.

1/2
S33|S34
1937

raise a mound

of stone, 4 ft. base, 2 1/2 ft. high, W. of cor.

70.50 An ungraded road, bears N.70°W. and S.70°E.

77.20 Desc. 15 ft. over northerly slope to sec. cor.

81.55 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 27, 28, 33 and 34, with brass cap mkd.

TSS R20E
S28|S27
S33|S34
1937

raise a mound

of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Land, south half, broken, rough, rocky; north half, slightly rolling.

Soil, south half, rocky, sandy and exposed rock; 4th rate; north half, coarse red sand; 3rd rate.

No timber.

SUBDIVISION OF TOWNSHIP 5 SOUTH, RANGE 20 EAST.

Chains

enish40

Undergrowth, scattered sagebrush, shadscale and Russian thistle.

Fair grazing land.

From the cor. of secs. 26, 27, 34 and 35.

West, on the sectional correction line, bet. secs. 27 and 34.

Asc. gentle northeasterly slope.

11.60 Dry wash in rocky swale, 20 ft. above sec. cor., 9 lks. wide, and 3 ft. deep, from SW., drains N.60°E.

13.10 Base of a steep E. slope.

17.20 Top of steep asc., 50 ft. above wash, thence over bench land.

40.00 120 ft. above sec. cor.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/4 sec. cor., with brass cap mkd.

S 27

S 34

1937

raise a mound

of stone, 2 ft. base, 1 1/2 ft. high; N. of cor.

49.60 25 ft. above 1/4 sec. cor., thence over rolling land; draining generally N.

80.00 65 feet above 1/4 sec. cor.

The cor. of secs. 27, 28, 33 and 34.

Land, rolling, desert.

Soil, red sand, and exposed surface rock; 3rd and 4th rate.

No timber.

Undergrowth, sagebrush, shadscale and cotton brush.

Poor and fair grazing land.

N.0°02'W., bet secs. 27 and 28.

Over rolling and broken desert through medium dense undergrowth; desc. gentle NE. slope.

19.20 Wash, 20 lks. wide, 3 ft. deep, from S.70°W., drains SE.; asc. southerly slope.

26.70 Top of asc., 50 ft. above wash, bears S.60°E. and N.50°W.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/4 sec. cor., with brass cap mkd.

SUBDIVISION OF TOWNSHIP 5 SOUTH, RANGE 20 EAST

Chains

$\frac{1}{4}$
 S28 | S27
 1937

raise a mound

of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

Asc. gentle SE. slope.

72.20 Top of asc. 40 ft. above $\frac{1}{4}$ sec. cor., bears N. 70°E. and S. 70°W.; desc. NW. slope.

80.00 10 ft. below top of asc.

Set an iron post, 3 ft. long, 2 ins. diam., 12 ins. in the ground, to bedrock with 1 qt. charcoal deposited at base, and in a mound of stone, 5 ft. base to top for cor. of secs. 21, 22, 27, and 28, with brass cap mkd.

| | |
|-----|------|
| T5S | R20E |
| S21 | S22 |
| S28 | S27 |

1937

Land, rolling desert, general E. exposure and drainage.

Soil, coarse sandy clay; 3rd rate.

Undergrowth, medium dense shadscale, sagebrush, scattered cotton brush and rabbit brush.

No timber.

Fair grazing land.

East on random line bet. secs. 22 and 27.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

79.96 Intersect cor. of secs. 22, 23, 26, and 27.

Thence, West on true line bet. secs. 22 and 27.

Over broken and rolling desert through scattered underbrush; desc. NW. slope.

15.70 Wash, 10 lks. wide, 1 ft. deep, drains N. 60°E.; asc. abrupt NE. slope.

20.60 East edge of bench land, 70 ft. above wash, bears N. 60° E. and S. 60°W.


39.98 On general SE. slope.

Set on iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with 1 qt. charcoal deposited at the base, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

| | |
|---------------|-----|
| $\frac{1}{4}$ | S22 |
| . | S27 |

1937

SUBDIVISION OF TOWNSHIP 5 SOUTH, RANGE 20 EAST

| | | | | | | | |
|--------|---|-----|------|-----|-----|-----|------|
| Chains | | | | | | | |
| | Asc. SE. slope. | | | | | | |
| 52.70 | Top of asc., 40 ft. above $\frac{1}{4}$ sec. cor.; ^{thence} over rolling land draining NW. | | | | | | |
| 79.96 | The cor. of secs. 21, 22, 27, and 28. | | | | | | |
| | Land, broken and rolling desert; general east exposure and drainage. | | | | | | |
| | Soil, coarse sandy clay; 3rd rate. | | | | | | |
| | No timber. | | | | | | |
| | Undergrowth, scattered shadscale, sagebrush, and cotton brush. | | | | | | |
| | Poor grazing land. | | | | | | |
| | N. 0°02'W., bet. secs. 21 and 22. | | | | | | |
| | Over rolling and broken desert, through scattered undergrowth; desc. NW. slope. | | | | | | |
| 3.50 | Wash, 6 lks. wide, 1 ft. deep, 40 ft. below sec. cor. drains N. 60°E. ; asc. rolling SE. slope 38 ft. | | | | | | |
| 20.00 | Desc. 15 ft. over gentle northerly slope. | | | | | | |
| 29.20 | Wash, 6 lks. wide, 2 ft. deep, drains North 60°E. | | | | | | |
| 40.00 | Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground with 1 qt. charcoal deposited at base, for $\frac{1}{4}$ sec. cor. with brass cap mkd. | | | | | | |
| | <div style="text-align: center;">  </div> | | | | | | |
| | Thence 1937 | | | | | | |
| | Over gentle rolling desert | | | | | | |
| 30.00 | Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground for cor. of secs. 15, 16, 21, and 22; with brass cap mkd. | | | | | | |
| | <div style="text-align: center;"> <table border="1" data-bbox="572 1583 757 1703"> <tr> <td>T5S</td> <td>R20E</td> </tr> <tr> <td>S16</td> <td>S15</td> </tr> <tr> <td>S21</td> <td>S 22</td> </tr> </table> </div> | T5S | R20E | S16 | S15 | S21 | S 22 |
| T5S | R20E | | | | | | |
| S16 | S15 | | | | | | |
| S21 | S 22 | | | | | | |
| | 1937 | | | | | | |
| | of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor. | | | | | | |
| | Land, broken and rolling desert; general easterly exposure and drainage. | | | | | | |
| | Soil, coarse sandy clay; 3rd rate, with sandstone surface rock. | | | | | | |
| | Undergrowth, medium dense to scattered sagebrush, shadscale, and cotton brush. | | | | | | |
| | No timber. | | | | | | |

SUBDIVISION OF TOWNSHIP 5 SOUTH, RANGE 20 EAST.

Chains

Fair to poor, grazing land.

East on random line bet. secs. 15 and 22.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

79.94 Intersect cor. of secs. 14, 15, 22 and 23.

Thence

West on the true line bet. secs. 15 and 22.

Over rolling and broken desert, through scattered underbrush; descend general SW. slope 70 ft.

20.60 Wash, 20 lks. wide, 6 ft. deep, drains SW.; over rolling land.

39.97 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with 1 qt. charcoal deposited at base for $\frac{1}{4}$ sec. cor. with brass cap mkd.

S 15
 $\frac{1}{4}$ —————
 S 22
 1937

41.00 Desc. steep westerly slope.

47.40 Main wash, 10 lks. wide, 4 ft. deep, 60 ft. below $\frac{1}{4}$ sec. cor., drains S.; ascend northeasterly slope 50 ft. to

51.00 Asc. 60 ft. over rolling bench land.

79.94 The cor. of secs. 15, 16, 21 and 22.

Land, rolling desert, general south exposure and drainage.

Soil, coarse sandy clay; 3rd rate.

No timber.

Undergrowth, scattered shadscale, sagebrush and cotton brush.

Poor grazing land.

N.0°02'W., bet. secs. 15 and 16.

Over rolling and broken desert through medium dense undergrowth.

5.70 Desc. abrupt northerly slope.

10.60 Wash, 20 lks. wide, 7 ft. deep, in draw, 60 ft. below sec. cor., drains N.60°E.; asc. southerly slope, 40 ft.

13.60 Thence over rolling desert land.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor. with brass cap mkd.

$\frac{1}{4}$
 S16|S15
 1937

raise a mound

SUBDIVISION OF TOWNSHIP 5 SOUTH, RANGE 20 EAST.

Chains

enlace

of stone, 2 ft. base, 1½ ft. high, West of cor.

Asc. SE. slope.

45.90 Desc. northerly slope 15 ft.

52.80 Wash, 10 lks. wide, 1 ft. deep, drains N.75°E.; asc. SE. slope.

73.60 Spur, 80 ft. above wash, projects N.60°E.; desc. NW. slope.

80.00 95 ft. below spur on northerly slope.

Set an iron post, 3 ft. long, 2 ins. diam., 6 ins. in the ground, to bedrock, with sandstone, 15x18x8 ins., mkd. X, deposited at the base, and in a mound of stone, 5 ft. base to top, for cor. of secs. 9, 10, 15 and 16, with brass cap mkd.

T5S R20E

S9 | S10

S14 | S15

1937

Land, broken and rolling desert; general east exposure, and drainage.

Soil, coarse, sandy clay; 3rd rate.

No timber.

Undergrowth, scattered shadscale and sagebrush.

Fair to poor grazing land.

East on a random line bet. secs. 10 and 15.

40.00 Set temp. ¼ sec. cor.

79.92 Intersect N. and S. line, at cor. of secs. 10, 11, 14 and 15.

Thence

West, on true line, bet. secs. 10 and 15.

Over broken and rolling desert, through scattered undergrowth.

Descend slight SW. slope 35 ft.

16.50 Wash, 6 lks. wide, 1 ft. deep, drains S. Asc. E. slope.

19.00 Low spur, 50 ft. above wash, projects S.; desc. W. slope.

28.00 Wash, 30 lks. wide, 4 ft. deep, 55 ft. below spur, drains S.30°W.; asc. E. slope 45 ft.

34.00 Over rolling bench land.

39.96 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for ¼ sec. cor. of secs. 15 and 22, with brass cap mkd.

S 10

S 15

1937

raise a mound

of stone, 2 ft. base, 1½ ft. high, N. of cor.

SUBDIVISION OF TOWNSHIP 5 SOUTH, RANGE 20 EAST

Chains

47.80 Wash, 10 lks. wide, 1 ft. deep, 40 ft. below $\frac{1}{4}$ sec. cor., drains S.30°E.

51.90 Descend southwesterly slope.

70.20 Wash, 20 lks. wide, 2 ft. deep, 100 ft. below $\frac{1}{4}$ sec. cor., drains S.30°E.; asc. along northerly slope.

79.92 35 ft. above wash.

The cor. of secs. 9, 10, 15 and 16.

Land, broken and rolling desert; general S. exposure and drainage.

Soil, coarse, sandy clay; 3rd rate, with sandstone surface rock.

No timber.

Undergrowth, scattered shadscale, sagebrush and cotton brush.

Fair grazing.

N.0°02'W., bet. secs. 9 and 10.

Over rolling and broken desert, through medium dense undergrowth; desc. N. slope.

6.60 Wash, 20 lks. wide, 2 ft. deep, in draw, 40 ft. below sec. cor., drains SE.; asc. southerly slope.

20.90 Spur, 85 ft. above wash, projects S.60°E.; desc. northerly slope.

30.10 Wash, 10 lks. wide, 1 ft. deep, 50 ft. below spur, drains S.20°E.; asc. S. slope.

40.00 30 ft. above wash.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$\frac{1}{4}$
 S9 | S10
 1937

raise a mound

of stone, 3 ft. base, 3 ft. high, W. of cor.

40.10 Same wash, 10 lks. wide, 1 ft. deep, drains SW.

43.10 Same wash, drains SE.

46.00 Low spur, 25 ft. above wash, projects S:70°W., 2 chains dist.; desc. N. slope.

49.30 Same wash, 10 ft. below spur, 20 lks. wide, 3 ft. deep, drains SW.

80.00 85 ft. above wash on southerly slope.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 3, 4, 9 and 10, with brass cap mkd.

T5S R20E
 S4 | S3
 S9 | S10
 1937

raise a mound

of stone, 4 ft. base, 2 $\frac{1}{2}$ ft. high, W. of cor.

SUBDIVISION OF TOWNSHIP 5 SOUTH, RANGE 20 EAST.

Chains

and 10

Land, broken and rolling desert; general southerly exposure and drainage.

Soil, coarse sandy clay; 3rd rate, with sandstone surface rock.

Timber, scattered juniper.

Undergrowth, scattered shadscale and sagebrush.

Poor grazing land.

East on a random line bet. secs. 3 and 10.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

79.90 Intersect N. and S. line, 5 lks. S. of cor. of secs. 2, 3, 10 and 11.

Thence

S.89°58'W., on true line bet. secs. 3 and 10.

Over broken and rolling desert, through medium dense to scattered undergrowth; desc. SW. slope 65 ft.

18.00 Asc. easterly slope 25 ft.

23.00 Spur, projects S.20°W., about 8 chains; desc. W. slope.

30.70 Wash, 30 lks. wide, 4 ft. deep, 70 ft. below spur, drains S.10°W.; asc. E. slope.

39.95 30 ft. above wash on E. edge of bench bearing N.30°W. and S.30°E.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

S 3

$\frac{1}{4}$
S 10

1937

raise a mound

of stone, 4 ft. base, 2 $\frac{1}{2}$ ft. high, N. of cor.

Thence over gently rolling bench land.

62.60 West edge of bench, 14 ft. below E. edge, bears N.30°E. and S.20°W.; desc. westerly slope.

66.90 Wash, 20 lks. wide, 2 ft. deep, 50 ft. below bench, drains S.20°W.; asc. slight SE. slope.

79.90 20 ft. above wash.

The cor. of secs. 3, 4, 9 and 10.

Land, broken and rolling desert; general S. exposure and drainage.

Soil, coarse sandy clay; 3rd rate with sandstone surface rock.

No timber.

Undergrowth, medium dense to scattered shadscale, sagebrush and cotton brush.

Fair to poor grazing land.

SUBDIVISION OF TOWNSHIP 5 SOUTH, RANGE 20 EAST.

| Chains | |
|--------|--|
| | N.0°02'W., on a random line bet. secs. 3 and 4. |
| 40.00 | Set temp. $\frac{1}{4}$ sec. cor. |
| 77.95 | Intersect N. bdy. of Tp. 5 lks. E. of cor. of secs. 3, 4, 33 and 34, heretofore described. |
| | Thence |
| | S.0°04'E., on true line bet. secs. 3 and 4. |
| | Over rolling and broken desert, through medium dense to scattered juniper and undergrowth. |
| | Desc. over general southerly drainage. |
| .10 | Wash, 10 lks. wide, 1 ft. deep, drains generally SE. |
| 1.40 | Small spur, 5 ft. above sec. cor., projects E.; desc. southerly slope. |
| 9.50 | Wash, 10 lks. wide, 2 ft. deep, 75 ft. below spur, drains SW. |
| 37.95 | On southerly slope. |
| | Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd. |
| | $\frac{1}{4}$ S4 S3 1937 |
| | raise a mound |
| | of stone, 4 ft. base, 2 $\frac{1}{2}$ ft. high, W. of cor. |
| 50.20 | Same wash, 10 lks. wide, 2 ft. deep, 80 ft. below $\frac{1}{4}$ sec. cor., drains S.30°W. from N.30°W. |
| 51.70 | Same wash, 40 lks. wide, 2 ft. deep, 40 ft. below previous intersection, drains SE.; asc. northerly slope. |
| 60.70 | Divided spur, 45 ft. above wash, projects SW. and S.30°E. |
| 77.95 | 140 ft. below spur on southerly slope. |
| | The cor. of secs. 3, 4, 9 and 10. |
| | Land, broken and rolling desert; general south exposure and drainage. |
| | Soil, coarse sandy clay; 3rd rate. |
| | Timber, scattered juniper. |
| | Undergrowth, medium dense to scattered shadscale, sagebrush and cotton brush. |
| | Fair grazing land. |
| | From the cor. of secs. 27, 28, 33 and 34. |
| | West, bet. secs. 28 and 33. |
| 40.00 | Set temp. $\frac{1}{4}$ sec. cor. |
| 80.00 | Set temp. cor. of secs. 28, 29, 32 and 33. |
| | From the temp. cor. of secs. 28, 29, 32 and 33. 8.0 |
| | S.0°03'E., on a random line bet. secs. 32 and 33. |
| 40.00 | Set temp. $\frac{1}{4}$ sec. cor. |
| 82.09 | Intersect S. bdy. of the Tp. 6 lks. W. of the standard cor. of secs. 32 and 33, heretofore described. |

SUBDIVISION OF TOWNSHIP 5 SOUTH, RANGE 20 EAST.

Chains

enlist

Thence from the standard sec. cor. ...
N.0°03'W., bet. secs. 32 and 33.
Asc. rocky southwesterly slope.

1.30 Thence over nearly level bench land, 30 ft. above sec. cor.

9.50 Desc. 60 ft. over rocky broken northeasterly slope.

12.90 Over nearly level land.

14.20 Halfway Hollow, 1.50 chs. wide, 2 ft. deep, drains SE.

20.00 Halfway Hollow, drains SW.

27.60 Halfway Hollow, drains SE.; asc. 110 ft. over rocky SW. slope.

35.00 Desc. 40 ft. over rocky northerly slope.

39.20 Draw, drains S.70°W.; asc. 60 ft. over steep S. slope.

42.09 Set an iron post, 3 ft. long, 1 in. diam., over a cross (X) cut in surface rock, in a mound of stone, 7 ft. base to top, for 1/2 sec. cor., with brass cap mkd.

1/2
S32|S33
.1937

Along the top of cliff, faces generally W.

42.10 South edge of canyon, 80 ft. deep, drains S.60°W.

45.00 North edge of canyon; asc. 30 ft. over rolling to rough land; drains generally SW.

67.30 Desc. 50 ft. over N. slope.

76.90 Dry wash, 30 lks. wide, 3 ft. deep, drains S.80°W. 7 chs., thence SW.; asc. 25 ft. over steep rocky south slope.

80.00 Thence over rolling land.

82.09 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 28, 29, 32 and 33, with brass cap mkd.

T5S R20E
S29|S28
S32|S33
1937

raise a mound of stone, 2 ft. base, 1 1/2 ft. high. W. of cor.

Land, rolling and rough broken.

Soil, loose coarse sandy and rocky; 3rd and 4th rate.

No timber.

Undergrowth, sagebrush, shadscale and cotton brush.

Poor grazing land.

From the cor. of secs. 27, 28, 32 and 34.

8.50 West on the sectional correctional line, bet. secs. 28 and 33.

Asc. 25 ft. over rolling northerly to northeasterly slope.

10.80 Rocky knoll, 100 ft. above sec. cor.; extends N. 1 chain and S. 1 chain; desc. 35 ft. over steep W. slope.

12.80 Over slightly rolling bench land.

20.10 An ungraded road, bears generally N. and SE.

25.20 Over broken bad-land, drains generally SW.

37.30 Over rough to rolling land, drains generally SE.

39.97 40 ft. below top of knoll.

SUBDIVISION OF TOWNSHIP 5 SOUTH, RANGE 20 EAST

Chains

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground for 1/4 sec. cor., with brass cap mkd.

S 28

S 33

1937

raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of cor.

Asc. 30 ft. over southeasterly slope.

60.90 Desc. 90 ft. over broken sandstone ledges, facing irregularly NE. and SW.

75.50 Dry wash, 20 lks. wide, 3 ft. deep, bears 15 chains NE. of line; drains S.60°W.

76.50 Dry wash, 25 lks. wide, 3 1/2 ft. deep, drains SE.; asc. 24 ft. over rocky easterly slope.

79.00 Over rolling land.

79.94 The cor. of secs. 28, 29, 32 and 33.

Land, rolling and rough rocky.

Soil, shallow, loose, red sand and rocky; 4th rate.

No timber.

Undergrowth, scattering sagebrush, cotton brush, shadscale and Russian thistle.

Poor grazing land.

N.0°03'W., bet. secs. 28 and 29.

Over rolling land.

13.50 Rocky spur, 25 ft. above sec. cor., projects SW.; desc. rocky northerly slope.

20.30 Draw, 40 ft. below spur, drains S.80°W.; asc. steep S. slope.

31.10 Spur, 100 ft. above draw, projects W.; desc. 30 ft. over broken land, draining generally W.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/4 sec. cor., with brass cap mkd.

1/4

S29 | S28

1937

raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Asc. broken S. slope.

SUBDIVISION OF TOWNSHIP 3 SOUTH, RANGE 20 EAST

Chains

anls30

- 45.70 Spur, 25 ft. above $\frac{1}{4}$ sec. cor., projects W.; base. broken northwesterly slope.
- 55.00 Over broken land draining generally W. to SW.
- 80.00 25 ft. below spur.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 20, 21, 28 and 29, with brass cap mkd.

| | |
|------|------|
| T3S | R20E |
| S20 | S21 |
| S29 | S28 |
| 1937 | |

raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
 Land, rolling and rough broken.
 Soil, red clay and sandy; 3rd and 4th rate.
 No timber.
 Undergrowth, cotton brush, shadscale and sagebrush.
 Poor grazing land.

East on a random line bet. secs. 21 and 28.

- 40.00 Set temp. $\frac{1}{4}$ sec. cor.
- 79.92 Intersect a N. and S. line, 5 lks. N. of the cor. of secs. 21, 22, 27 and 28.
- Thence
 N.89°58'W., on a true line, bet secs. 21 and 28.
- Over rolling land.
- 5.10 Desc. rocky W. slope.
- 9.90 Wash, 15 lks. wide, 2 $\frac{1}{2}$ ft. deep, drains NE., 35 ft. below sec. cor.; asc. 100 ft. over NE. slope.
- 39.98 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

| |
|---------------|
| S21 |
| $\frac{1}{4}$ |
| S28 |
| 1937 |

raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.
 44.60 Top of asc.; desc. 80 ft. over generally southwesterly slope.

SUBDIVISION OF TOWNSHIP 5 SOUTH, RANGE 20 EAST.

Chains

- 69.50 Desc. 50 ft. over rocky W. slope.
- 70.50 Over broken land, draining generally SW.
- 79.92 The cor. of secs. 20, 21, 28 and 29.
Land, rolling and slightly broken.
Soil, sandy and rocky; 3rd and 4th rate.
No timber.
Undergrowth, sagebrush, shadscale and cotton brush.
Poor grazing land.
-
- N.0°03'W., bet. secs. 20 and 21.
Asc. 70 ft. over broken southwesterly slope.
- 22.20 Thence over nearly level land.
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with a sandstone, 7x3x2 ins., mkd. X, deposited at base, for $\frac{1}{4}$ sec. cor., with brass cap marked
- $\frac{1}{4}$
S20|S21
1937
- 66.00 Over rolling land
- 80.00 50 ft. above $\frac{1}{4}$ sec. cor.
Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 16, 17, 20 and 21, with brass cap mkd.
- T5S R20E
S17|S16
S20|S21
1937
- raise a mound
- of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
Land, nearly level rolling and broken.
Soil, clay, sandy and rocky; 3rd and 4th rate.
No timber.
Undergrowth, sagebrush, shadscale and grass.
Fair grazing land.

SUBDIVISION OF TOWNSHIP 5 SOUTH, RANGE 20 EAST.

| Chains | |
|--------|--|
| | S.89°57'E., on a random line between sections 16 and 21, for distance only, a flag on the objective sec. cor. being visible. |
| 40.00 | Set temp. $\frac{1}{4}$ sec. cor. |
| 79.94 | Intersect the cor. of secs. 15, 16, 21 and 22. Thence N.89°57'W., on true line between secs. 16 and 21. |
| 6.00 | Desc. 40 ft. over steep westerly slope. |
| 9.50 | Asc. 30 ft. over easterly slope. |
| 13.70 | Spur, slopes N. |
| 17.10 | Wash, 40 ft. below sec. cor., 25 lks. wide, 4 ft. deep, heads 8 chains S.15°E. of line, drains NE., over rolling land, drains generally NE. |
| 39.97 | Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd. S16 $\frac{1}{4}$ ——— S21 1937 raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, N. of cor. A reservoir bears N.32°12'E. |
| 47.00 | Dry wash, 30 lks. wide, 4 ft. deep, drains NE. |
| 59.80 | Asc. 50 ft. over E. slope. |
| 65.00 | Over slightly rolling land, draining generally E. |
| 70.50 | Over rolling to rough land, draining generally SE. |
| 79.94 | The cor. of secs. 16, 17, 20 and 21. Land, rolling and rough broken. Soil, clay, sandy and rocky; 3rd rate and 4th rate. No timber. Undergrowth, cotton brush, shadscale sagebrush and grass. Poor grazing land. N.0°03'W., bet. secs. 16 and 17. Over rolling land, draining generally SE. |
| 11.40 | Thence over nearly level land. |
| 26.40 | Thence over slightly broken land, draining E. |
| 36.30 | Reservoir, bears S.73°00'E. |
| 40.00 | 70 ft. above sec. cor. Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground for $\frac{1}{4}$ sec. cor., with brass cap mkd. |

SUBDIVISION OF TOWNSHIP 5 SOUTH, RANGE 20 EAST

Chains

$\frac{1}{4}$
 S17 | S16
 1937

raise a mound

of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

52.90 Desc. broken northeasterly slope.

70.30 Wash, in draw, 80 ft. below $\frac{1}{4}$ sec. cor., 18 lks. wide, 2 ft. deep, from N. 70°W., drains E. 5 chains to junction; asc. SW. slope.

73.00 Spur, 60 ft. above wash, projects S. 80°E. 4 chains; desc. 30 ft. over NE. to easterly slope.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 27 ins. in the ground for cor. of secs. 8, 9, 16, and 17, with brass cap mkd.

| | |
|-----|------|
| T5S | R20E |
| S8 | S9 |
| S17 | S16 |

 1937

raise a mound

of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

Land, rolling and slightly broken.

Soil, loose sand, surface sandstone exposed; 3rd and 4th rate.

No timber.

Undergrowth, sagebrush, shadscale and Russian thistle.

Fair grazing land.

on a random line,
 S. 89°57'E.,/bet. secs. 9 and 16.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

79.94 Intersect the cor. of secs. 9, 10, 15, and 16.

Thence

on true line,
 N. 89°57'W.,/bet. secs. 9 and 16.

Over irregular northerly slope.

5.50 Asc. easterly slope.

31.50 Top of asc. 100 ft. above sec. cor., bears N. and S.; desc. 15 ft. over rolling westerly slope.

39.97 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$\frac{1}{4}$ S9
 ———
 S16
 1937

SUBDIVISION OF TOWNSHIP 8 NORTH, RANGE 20 EAST.

Chains

articles

of stone, 2 ft. base, 1½ ft. high, N. of cor.
 Desc. 10 ft. over rolling westerly slope.

45.00 Desc. 40 ft. over rocky broken westerly slope.

52.40 Over rolling land, drains generally S.

59.80 Wash, 100 ft. below ¼ sec. cor., 15 lks. wide, 4 ft. deep,
 drains S, 30°W.; asc. SE. slope.

71.30 Top of asc., 60 ft. above wash, falls south; desc. W.
 slope.

77.80 Dry Creek bed, 80 ft. below asc., 80 lks. wide, 3 ft. deep,
 drains SE; asc. irregular easterly slope.

79.94 The cor. of secs. 8, 9, 16, and 17; 30 ft. above wash.

Land, rolling and broken.

Soil, loose blow sand, and rocky clay; 4th rate.

No timber.

Undergrowth, sagebrush, shadscale, and grass.

Fair grazing land.

N. 0°03'W., bet. secs. 8 and 9.

Over rolling land.

9.60 Dry wash, 60 ft. below sec. cor., 90 lks. wide, 3 ft.
 deep, from NE., drains SE.

17.40 Dry wash, 80 lks. wide, 3 ft. deep, from N. 30°W., drains
 SE., 4 chains; thence SW.; thence over rolling land.

41.00 Set an iron post, 3 ft. long, 1 in. diam., 4 ins. in the
 ground, to underlying rock with a sandstone, 4x3x2 ins.
 sqd. 1, 1/2 ins. in a mound of stone to top, for ¼ sec. cor.
 with brass cap sqd.

38 | 59
 1937

47.40 Dry wash, 30 lks. wide, 5 ft. deep, from NW., drains S.
 30°W.

54.00 Wash, 25 lks. wide, 4 ft. deep, drains SW. 4 chains to
 junction.

66.80 Enter few scattered scrub junipers.

71.90 Over rounding southwesterly changing to easterly slope.

80.00 Set an iron post, 3 ft. long, 2 ins. in diam., 27 ins. in
 the ground for cor. of secs. 4, 5, 8, and 9, with brass
 cap sqd.

SUBDIVISION OF TOWNSHIP 5 SOUTH, RANGE 20 EAST

Chains

| | |
|-----|------|
| T5S | R20E |
| S5 | S4 |
| S8 | S9 |

1937

raise a mound

of stone, 2 ft. base, 1½ ft. high, W. of cor.

Land, rolling and broken.

Soil, rocky clay, and sandy.

Timber, scattering juniper.

Undergrowth, sagebrush, shadscale, and greasewood.

Poor grazing land.

S. 89°57'E., on random line bet. secs. 4 and 9.

40.00 Set temp. ¼ sec. cor.

79.88 Intersect the N. and S. line 3 lks. S. of the cor. of secs. 3, 4, 9, and 10.

Thence

N. 89°58'W. on true line bet. secs. 4 and 9.

Over broken and rolling desert, through scattered undergrowth.

Asc. southeasterly slope 85 ft.

14.90 Spur from N. 20°W., projects N. 70°E.

18.20 Draw, heads 2 chains N. 60°W.; drains S. 60°E., 70 ft. below spur; asc. abrupt easterly slope.

39.94 140 ft. above draw.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground for ¼ sec. cor. of secs. 4 and 9, with brass cap mkd.

| | |
|---|----|
| ¼ | S4 |
| | S9 |

1937

raise a mound

of stone, 4 ft. base, 2½ ft. high, N. of cor.

42.70 Spur, 30 ft. above ¼ sec. cor.; projects S. 70°W.; desc. irregular northwesterly slope.

67.40 Wash, 10 lks. wide, 2 ft. deep, 95 ft. below spur, drains SW.

79.88 55 ft. above wash on easterly slope.

SUBDIVISION OF TOWNSHIP 5 SOUTH, RANGE 20 EAST

| Chains | |
|--------|---|
| | The cor. of secs. 4, 5, 8, and 9. Land, broken and rolling desert; general S. exposure and drainage. Soil, coarse sandy clay; 3rd rate, with sandstone surface rock. Timber, scattered juniper. Undergrowth, shadscale, sagebrush and cotton brush. Fair to poor grazing land. |
| | N. 0°04'W., on random line bet. secs. 4 and 5. |
| 40.00 | Set temp. $\frac{1}{4}$ sec. cor. |
| 78.00 | Intersect N. bdy. of Tp. 2 lks. E. of the cor. of secs. 4, 5, 32, and 33. heretofore described. Thence S. 0°05'E., on true line bet. secs. 4 and 5. Asc. northeasterly slope. |
| 4.30 | Spur, 20 ft. above sec. cor., projects E. 2 chains; desc. southerly slope. |
| 11.30 | Dry wash, 40 ft. below spur, 15 lks. wide, 2 ft. deep, drains S. 30°W., over broken land, draining west, at base of steep W. slope. |
| 27.20 | Vernal to Whiterocks road, bears N. 67°W. and S. 82°E.; asc. northerly slope. |
| 38.00 | 110 ft. above road on steep rocky northerly slope, 50 lks. W. and 10 ft. below small bench. Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground for $\frac{1}{4}$ sec. cor. with brass cap mkd. <div style="text-align: center;"> $\begin{array}{c} \frac{1}{4} \\ S5 \quad \quad S4 \\ 1937 \end{array}$ </div> from which A juniper, 6 ins. in diam., bears N. 32 $\frac{1}{4}$ °E., 41 lks. dist., mkd. $\frac{1}{4}$ S4BT. A juniper, 2 ins. in diam., bears N. 12 $\frac{1}{2}$ °W., 57 lks. dist., mkd. BT. |
| 43.20 | Edge of small level topped bench, 1 $\frac{1}{2}$ chains wide, bears N. 10°E. and S. 10°W. |
| 52.80 | Edge of small level topped bench, bears N. 10°W. and S. 20°E.; along steep rocky westerly slope. |
| 60.00 | Spur, from bench falls S. 20°W. 10 chains |
| 69.00 | Base of steep slope, 140 ft. below spur,; desc. 20 ft. over broken land, draining E. |
| 78.00 | The cor. of secs. 4, 5, 8, and 9. Land, nearly level and steep broken. |

SUBDIVISION OF TOWNSHIP 5 SOUTH, RANGE 20 EAST.

Chains

Soil, rocky clay, and sandy; 4th rate.
Timber, scattering juniper.
Undergrowth, sagebrush and shadscale.
Poor grazing land.

From the cor. of secs. 28, 29, 32 and 33.
West, bet. secs. 29 and 32.

40.00 Set temp. 1/4 sec. cor.

80.00 Set temp. cor. of secs. 29, 30, 31 and 32.

From temp. cor. of secs. 29, 30, 31 and 32.
S.0°04'E., on a random line bet. secs. 31 and 32.

40.00 Set temp. 1/4 sec. cor.

82.62 Intersect S.bdy. of the Tp. 2 lks. E. of the standard cor. of secs. 31 and 32, heretofore described.

Thence

N.0°04'W., bet. secs. 31 and 32.
Over nearly level bench land.

25.30 Desc. steep rocky N. slope.

29.20 Dry gulch, 120 ft. below standard section cor., drains E.; asc. steep S. slope.

34.40 Over nearly level bench land, 130 ft. above gulch.

39.80 Desc. 70 ft. over steep rocky N. slope.

42.62 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/4 sec. cor., with brass cap mkd.

1/4
S31|S32
1937

raise a mound

of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

47.50 Dry gulch, 67 ft. below 1/4 sec. cor., drains S.80°E.; asc. steep S. slope.

56.40 Broad spur, 120 ft. above gulch, projects E., over nearly level bench land.

59.30 Desc. steep N. slope.

67.30 Deep draw, 150 ft. below spur; drains S.80°E.; asc. ledges and steep S. slope.

75.90 Over broad spur, 160 ft. above draw, projects E.

82.20 Desc. 10 ft. over rocky N. slope.

82.62 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 29, 30, 31 and 32, with brass cap mkd.

SUBDIVISION OF TOWNSHIP 5 SOUTH, RANGE 20 EAST.

Chains

anland

T5S R20E

S30/S29

S31/S32

1937

raise a mound

of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Land, nearly level and rough broken.

Soil, loose coarse sand and rocky, with exposed bedrock; 3rd and 4th rate.

No timber.

Undergrowth, sagebrush, shadscale and grass.

Fair to good grazing land.

From the cor. of secs. 28, 29, 32 and 33.

West, on a sectional correction line, bet. secs. 29 and 32.

Over rolling land, drains S.

9.40 Desc. 90 ft. over rolling and broken land, drains generally SW.

17.20 Land, very rocky and broken, general drainage SW.

32.50 Over nearly level bottom land, drains generally SW.

38.90 Dry wash, 20 lks. wide, 2 1/2 ft. deep, drains SW.

40.01 Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for 1/4 sec. cor., with brass cap mkd.

S29

1/4

S32

1937

raise a mound

of stone, 4 ft. base, 2 1/2 ft. high, N. of cor.

40.80 Halfway Hollow, dry, 1 chain wide, 3 ft. deep, drains SE.; asc. 80 ft. over NE. slope.

45.50 Over rolling northeasterly slope.

49.60 Desc. 20 ft. over NW. slope.

51.00 Draw, drains NE.; asc. 100 ft. over rolling to rough land, draining generally northeast.

70.00 Asc. 110 ft. over abrupt easterly slope.

76.50 Asc. 20 ft. along northerly slope.

80.02 The cor. of secs. 29, 30, 31 and 32.

Land, rolling, rough and broken.

Soil, coarse and rocky sand; 4th rate.

No timber.

Undergrowth, sagebrush, shadscale, cotton brush and greasewood.

Poor grazing land.

SUBDIVISION OF TOWNSHIP 5 SOUTH, RANGE 20 EAST

Chains

West, on a true line, bet. secs. 30 and 31.

Asc. 10 ft. over northerly slope.

1.40 Over nearly level bench land.

28.30 Ungraded road, bears N. and S.

31.40 Top of asc., 40 ft. above sec. cor., bears N. and S.; desc. 75 ft. over irregular westerly slope to $\frac{1}{4}$ sec. cor.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

| | |
|---------------|-------|
| | S30 |
| $\frac{1}{4}$ | <hr/> |
| | S31 |

1937

raise a mound

of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

40.10 Dry wash, 5 lks. wide, 1 ft. deep, drains N.; asc. 50 ft. over NE. slope.

45.60 Desc. 100 ft. over rocky NW. slope.

51.60 Base of steep slope, over rolling land, drains generally SW.

54.10 Dry wash, 15 lks. wide, 2 ft. deep, drains SW.

78.00 Dry wash, 20 lks. wide, 2 ft. deep, drains S.; asc. rolling E. slope.

80.00 Set an iron post, 3 ft. long, 1 in. in diam., 27 ins. in the ground, for cor. of lots 1 and 2, sec. 31 and lots 7 and 8, sec. 30, with brass cap mkd.

| | |
|-----|-------|
| T5S | R20E |
| | S30 |
| | 7 8 |
| | <hr/> |
| | 2 1 |
| | S31 |

1937

raise a mound

of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

81.00 Over slightly rolling land.

88.55 Intersect the west bdy. of the tp. at a point 2.88 chains N. of the cor. of secs. 25 and 36, T. 5 S., R. 19 E.

Set an iron post, 3 ft. long, 2 ins. diam. over a cross chiseled in surface rock and in a mound of stone to top, for closing cor. of secs. 30 and 31, with brass cap mkd.

| | | |
|------|------|----|
| | T5S | |
| T5S | R20E | |
| R19E | S30 | CC |
| S25 | S31 | |

1937

SUBDIVISION OF TOWNSHIP 5 SOUTH, RANGE 20 EAST

Chains

Land, nearly level, rolling and rough broken.
Soil, sandy, sandy clay and rocky; 3rd and 4th rate.
No timber.
Undergrowth, sagebrush, shadscale and cotton brush.
Partly good and partly poor grazing land.

From the cor. of secs. 29, 30, 31, and 32.

N. 0°04'W., bet. secs. 29 and 30.

Over rolling and broken desert, through medium dense to scattered undergrowth.

Desc. abrupt N. slope 125 ft.

4.70 Wash, 10 lks. wide, 1 ft. deep, drains E.; asc. abrupt SE. slope.


10.00 Spur, 125 ft. above wash, falls sharply N. 80°E. about 15 chains; desc. abrupt NE. slope.

25.40 Halfway Hollow, 100 lks. wide, 4 ft. deep, 285 ft. below spur, drains S. 60°E.; asc. southerly slope.

37.40 Spur, 120 ft. above wash, projects S. 50°W. about 8 chains distant; desc. NW. slope.

40.00 10 ft. below spur, on gentle NW. slope.

Set an iron post, 3 ft. long, 1 in. diam., on X. mkd. on exposed bedrock and in a mound of stone, 6 ft. base to top, for 1/4 sec. cor., with brass cap mkd.



Continue to desc. slight NW. slope.


51.30 Wash, 10 lks. wide, 3 ft. deep, in small draw, 15 ft. below 1/4 sec. cor. drains S. 30°W.; asc. SW. slope.

68.10 Spur 75 ft. above wash, projects SW. 15 chains distant; desc. slight NW. slope.

76.60 Head of small draw, 25 ft. below spur, drains SW.; asc. southeasterly slope.

80.00 15 ft. above head of draw.

Set an iron post, 3 ft. long, 2 ins. diam., 6 ins. in the ground, with red sandstone 6x6x3 ins. mkd. X. deposited at the base, and in mound of stone 6 ft. base to top, for cor. of secs. 19, 20, 29 and 30, with brass cap mkd.



SUBDIVISION OF TOWNSHIP 5 SOUTH, RANGE 20 EAST

Chains

Land, broken rough desert; general S. exposure and drainage.

Soil, coarse sandy clay; 3rd rate, with sandstone surface rock.

No timber.

Undergrowth; scattered shadscale, sagebrush and cotton brush.

Poor grazing land.

East on random line bet. secs. 20 and 29.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.02 Intersect N. and S. line 3 lks. S. of cor. of secs. 20, 21, 28, and 29.

Thence

S. 89°59'W. on true line bet. secs. 20 and 29.

Over broken and rolling desert, through scattered undergrowth; desc. SW. slope 15 ft.

2.50 Draw, near head, course SW. over rolling southerly slope.

4.00 Wash, 10 lks. wide, 2 ft. deep, drains SW.; asc. E. slope.

8.50 End of spur, 20 ft. above wash, projects S. 1 chain; desc. SW. slope.

11.10 Wash, 6 lks. wide, 6 ins. deep, in draw, 20 ft. below spur, drains S. 10°W.; asc. E. slope.

15.00 W. edge of draw, 110 ft. above wash, bears N. and S. 30° W.; asc. easterly slope.

28.40 Crest of asc., 30 ft. above edge of draw; desc. gentle W. slope 20 ft.

40.01 On gentle W. slope.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$\frac{1}{4}$ S20
S29

1937

raise a mound

of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, N. of cor.

41.00 Asc. slight southeasterly slope, 30 ft.

45.90 Crest of asc. extends N. and S.; desc. W. slope 10 ft.

54.30 Desc. steep rocky W. slope 95 ft.

56.20 Wash, 20 lks. wide, 1 ft. deep, drains S.; asc. E. slope.

59.70 Spur, 50 ft. above wash, projects S. 20°W. 7 chains dist.;

SUBDIVISION OF TOWNSHIP 5 SOUTH, RANGE 20 EAST

Chains

desc. NW. slope.

64.20 Wash, 10 lks. wide, 1 ft. deep, 40 ft. below spur, drains S. 10°E.; asc. SE. slope.

80.02 50 ft. above wash.

The cor. of secs. 19, 20, 29, and 30.

Land, broken and rolling desert; general S: exposure and drainage.

Soil, coarse sandy clay; 3rd rate, with sandstone surface rock.

No timber.

Undergrowth, scattered shadscale, sagebrush, and cotton brush.

Poor grazing land.

West, bet. secs. 19 and 30.

Over broken desert, through scattered undergrowth; asc. SE. slope.

6.00 Spur, 15 ft. above sec. cor., projects S. 60°W.; desc. slight NW. slope.

28.90 Wash, 15 ft. above spur, 10 lks. wide, 1 ft. deep, drains S. 70°W. 5 chains; thence southerly; asc. general SE: slope 15 ft.

38.70 Over slightly rolling land.

40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$\frac{1}{4}$ $\frac{S19}{S30}$

1937

raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.

41.00 Desc. West slope.

53.50 Halfway Hollow, 100 lks. wide, 3 ft. deep, 30 ft. below $\frac{1}{4}$ sec. cor., drains SE. from S. 60°W.

61.20 Halfway Hollow 60 lks. wide, 4 ft. deep, 40 ft. above previous intersection, drains S. 15°W.; asc. E. slope.

67.90 Spur, 95 ft. above Halfway Hollow, projects N. 15°E. 3 chains dist., from bench S. 15°W. 8 chains; desc. NW. slope

77.30 Wash, 10 lks. wide, 1 ft. deep, in draw 15 ft. below spur, drains N. 60°E., asc. abrupt E. slope.

80.00 50 ft. above wash on E. slope.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the

SUBDIVISION OF TOWNSHIP 5 SOUTH, RANGE 20 EAST.

Chains

ground for the cor. of lots 7 and 8 in sec. 19, and lots 1 and 2 in sec. 30, with brass cap mkd.

S19

7|8

2|1

S30

1937

raise a mound

of stone, 3 ft. base, 3 ft. high, N. of cor.

85.50 E. edge of bench 160 ft. above lot cor., bears N.60°E., and S.60°W.

88.35 Intersect W. bdy. of Tp. at a point 2.96 chs. N. of cor. of secs. 24 and 25, of T. 5 S., R. 19 E.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for closing cor. of secs. 19 and 30, with brass cap mkd.

T5S

R19E R20E

S24|S19

S30

CC

1937

raise a mound

of stone, 4 ft. base, 2½ ft. high, E. of cor.

Land, broken and rolling desert; general southerly exposure and drainage.

Soil, coarse sandy clay; 3rd rate, with sandstone surface rock.

No timber.

Undergrowth, scattered shadscale, sagebrush, and cotton brush.

Poor grazing land.

From the cor. of secs. 19, 20, 29 and 30.

N.0°04'W., bet. secs. 19 and 20.

Over rolling and broken desert, through scattered undergrowth.

Asc. southeasterly slope.

5.00 Over rolling to broken land at head of westerly drainage.

13.00 Over rolling to broken uplands, draining generally East.

27.00 Draw, near head, course SE.

39.50 Over foot of rounded spur, projecting SE.

40.00 60 ft. above sec. cor.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for ¼ sec. cor. of secs. 19 and 20, with brass cap mkd.

¼
S19|S20

1937

raise a mound

of stone, 2 ft. base, 1½ ft. high, W. of cor.

Over rolling to broken land, draining generally SE.

59.00 Asc. 20 ft. over sandstone ledges facing S.; continue

SUBDIVISION OF TOWNSHIP 50 SOUTH, RANGE 20 EAST.

| | |
|--------|---|
| Chains | over broken and rolling uplands, draining generally SE. |
| 65.20 | Draw, near head, course SE. |
| 73.20 | Flat topped spur, 125 ft. above $\frac{1}{4}$ sec. cor., projects SE.; desc. 100 ft. over NE. slope to sec. cor. |
| 80.00 | Set an iron post, 5 ft. long, 2 ins. diam., 18 ins. in the ground, to bedrock, with sandstone, 4x4x3 ins., mkd. X, deposited at base, and in a mound of stone, 4 ft. base, to top, for cor. of secs. 17, 18, 19 and 20, with brass cap mkd. |
| | T5S R20E |
| | S18 S17 |
| | S19 S20 |
| | 1937 |
| | Land, broken and rolling desert; general SE exposure and drainage. |
| | Soil, coarse, sandy clay; 3rd rate, with sandstone surface rock. |
| | No timber. |
| | Undergrowth, scattered shadscale, sagebrush and cotton brush. |
| | Poor grazing land. |
| | N. 89° 59' E., on a random line bet. secs. 17 and 20. |
| 40.00 | Set temp. $\frac{1}{4}$ sec. cor. |
| 80.02 | Intersect N. and S. line, 2 lks. N. of the cor. of secs. 16, 17, 20 and 21. |
| | Thence |
| | West, on true line bet. secs. 17 and 20. |
| | Over broken and rolling desert, through scattered undergrowth. |
| | Asc. over rolling to rough land, draining generally SE. to E. |
| 30.80 | Spur, 155 ft. above $\frac{1}{4}$ sec. cor., projects S. 15° E.; desc. steep rocky W. slope. |
| 40.01 | 195 ft. below spur. |
| | Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap mkd. |
| | S 17 |
| | $\frac{1}{4}$ sec. |
| | S 20 |
| | 1937 |
| | raise a mound |
| | of stone, 2 ft. base, 1 1/2 ft. high, N. of cor. |
| | Continue to desc. steep rocky W. slope. |
| 42.70 | Wash, 15 lks. wide, 2 ft. deep, 20 ft. below $\frac{1}{4}$ sec. cor., drains S. 30° W.; asc. E. slope. |
| 45.20 | Spur, 10 ft. above wash, projects S. 30° W.; desc. westerly slope. |
| 52.90 | Wash, 20 lks. wide, 2 ft. deep, 20 ft. below spur, drains S. 20° W.; asc. slight northeasterly slope. |

SUBDIVISION OF TOWNSHIP 5 SOUTH, RANGE 20 EAST

Chains

- 180.02 95 ft. above wash, on NE. slope.
The cor. of secs. 17, 18, 19, and 20.
Land, broken and rolling desert; general SW. exposure and drainage.
Soil, coarse sandy clay; 3rd rate.
No timber.
Undergrowth, scattered sagebrush, shadscale, and cotton brush.
Poor grazing land.
- West, bet. secs. 18 and 19.
Over broken desert, through scattered undergrowth.
Asc. northeasterly slope.
- 7.00 Spur, 110 ft. above sec. cor., projects S.30°E.; desc. steep westerly slope.
- 12.90 Draw, 70 ft. below spur, course S., asc. easterly slope.
- 19.10 Over bench land, 70 ft. above draw.
- 25.50 Desc. 100 ft. over steep rocky westerly slope.
- 30.50 Desc. 30 ft. over rolling to broken land, draining generally SW:
- 40.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked

| |
|---------------|
| S 18 |
| $\frac{1}{4}$ |
| S 19 |

1937 raise a mound
of stone, 3 ft. base, 2 ft. high, N. of cor.
Over rolling land, general SW. drainage.
- 74.70 Draw, 140 ft. below $\frac{1}{4}$ sec. cor., drains S.
- 80.00 Set an iron post, 3 ft. long, 1 in. diam., cross marked X on sandstone exposed bedrock, and in a mound of stone 6 ft. base to top, for lots 7 and 8, sec. 18, and lots 1 and 2, sec. 19, with brass cap mkd.

| |
|-------|
| S 18 |
| 7 8 |
| 2 1 |
| S 19 |

1937
- 84.50 Halfway Hollow, 75 lks. wide, 5 ft. deep, drains S. over level land.

SUBDIVISION OF TOWNSHIP 3 SOUTH, RANGE 20 EAST.

Chains

88.25 Intersect W. bdy. of Tp. at a point 2.78 chs. north of cor. of secs. 13 and 24, of T. 3 S., R. 19 E.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground for closing cor. of secs. 18 and 19, with brass cap mkd.

| | |
|------|--------|
| T6S | T6E |
| R19E | R20E |
| S13 | S16 CC |
| S18 | S19 |

1937

raise a mound of stone, 4 ft. base, 2½ ft. high, E. of cor.
 Land, broken and rolling desert, general south exposure and drainage.
 Soil, coarse sandy clay; 3rd rate, with sandstone surface rock.
 No timber.
 Undergrowth, scattered shadscale, sagebrush, and cotton brush.
 Poor grazing land.

From the cor. of secs. 17, 18, 19, and 20.

N.0°04'W., bet. secs. 17 and 18.

Over broken and rolling desert, through medium dense to scattered undergrowth.

Desc. slight NE. slope 15 ft.

14.00 Wash, 10 lks. wide, 1 ft. deep, drains S.30°E.; asc. southerly slope.

20.00 Spur, 50 ft. above wash, projects S.80°E. 8 chains, thence southerly; desc. slight northerly slope.

30.00 Wash, 10 lks. wide, 1 ft. deep, 40 ft. below spur, drains S.60°E.; asc. S. slope,

40.00 15 ft. above wash.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for ¼ sec. cor., with brass cap mkd.

| | |
|------|------|
| S 18 | S 17 |
|------|------|

1937


raise a mound of stone, 4 ft. base, 2½ ft. high, W. of cor.
 54.80 S. edge of flat topped spur, 150 ft. above ¼ sec. cor., bears S.60°E. and N.60°W.

SUBDIVISION OF TOWNSHIP 5 SOUTH, RANGE 20 EAST

Chains

- 59.00 N. edge of flat topped spur, bears S. 60°E. and NW.; desc. abrupt NE. slope.
- 63.70 Base of abrupt desc. 105 ft. below edge of spur, bears S. 60°E. and N. 60°W.; desc. gradual NE. slope.
- 76.20 Wash, 6 lks. wide, 1 ft. deep, in draw with head 10 chs. NW., 20 ft. below base of abrupt desc., drains SE; asc. SW. slope.
- 79.60 Low spur, 45 ft. above wash, projects SE.
- 80.00 On NE. slope.

Set an iron post, 3 ft. long, 2 ins. diam.,; 27 ins. in the ground for cor. of secs. 7, 8, 17, and 18, with brass cap mkd.



1937

raise a mound

of stone, 4 ft. base, 2½ ft. high W. of cor.

Land, broken and rolling desert; general SE. exposure and drainage.

Soil, coarse, sandy clay; 3rd rate, with sandstone surface rock.

No timber,

Undergrowth, scattered shadscale, sagebrush, and cotton brush.

Poor grazing land.

East, on a random line bet. secs. 8 and 17.

- 40.00 Set temp. ¼ sec. cor.
- 80.00 Intersect cor. of secs. 8, 9, 16, and 17.
Thence
West, on true line, bet. secs. 8 and 17.

Over broken and rolling desert, through scattered undergrowth.

Asc. slight E. slope.
- 5.60 Spur, 10 ft. above sec. cor., projects S. 30°E. 8 chains dist.; desc. slight SW. slope.
- 14.50 Wash, 20 lks. wide, 2 ft. deep, 35 ft. below spur, drains SE.; asc. easterly slope.
- 18.70 Spur, 50 ft. above wash, projects SE. 1 chain dist.; desc. SW. slope.
- 20.80 Wash, 10 lks. wide, 1 ft. deep, in draw 40 ft. below spur, drains S. 60°E.; asc. southerly slope.

SUBDIVISION OF TOWNSHIP 5 SOUTH, RANGE 20 EAST

Chains

- 30.00 Low spur, 50 ft. above wash, projects SE. 1 chain dist.; desc. SW. slope.
- 39.40 Wash, 10 lks. wide, 1 ft. deep, 35 ft. below spur, drains S. 60°E.
- 40.00 35 ft. above wash on slight SE. slope.
Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground for $\frac{1}{4}$ sec. cor. with brass cap mkd.
- $\frac{1}{4}$ $\frac{S8}{S17}$
- . 1937 .
- raise a mound
- of stone, 3 ft. base, 2 ft. high, N. of cor.
- 48.40 Same wash, 10 lks. wide, 1 ft. deep, 5 ft. above $\frac{1}{4}$ sec. cor. from N. 70°W., drains N. 80°E.; asc. slight E. slope.
- 53.40 Base of abrupt asc., 15 ft. above wash, bears S. 50°E. and N. 50°W.
- 66.90 Flat topped spur, 170 ft. above base of abrupt asc.; projects S. 50°E.; desc. abrupt SW. slope.
- 73.20 Wash, 10 lks. wide, 1 ft. deep, 120 ft. below spur, drains S.; asc. NE. slope.
- 80.00 50 ft. above wash.
- The cor. of secs. 7, 8, 17, and 18.
- Land, broken and rolling desert, general SE. exposure and drainage.
- Soil, coarse sandy clay; 3rd rate, with sandstone surface rock.
- No timber, undergrowth, scattered shadscale, sagebrush, and cotton brush.
- Poor grazing land.
-
- West, bet. secs. 7 and 18.
- Over broken and rolling desert, through scattered undergrowth; asc. NE. slope.
- 3.80 Spur, 35 ft. above sec. cor., projects S. 60°E.; asc. along southerly slope of spur.
- 13.70 E. edge of bench 65 ft. above spur bears irregularly N. and S. 20°E.
- Over rolling bench land.
- 27.40 W. edge of bench 25 ft. above E. edge bears NW. and S.; desc. abrupt W. slope.

SUBDIVISION OF TOWNSHIP 5 SOUTH, RANGE 20 EAST

| Chains | |
|--------|---|
| 34.20 | Base of abrupt W. slope, 185 ft. below edge of bench, bears N. and S.; desc. gentle SW. slope. |
| 40.00 | 40 ft. below base of abrupt slope. Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground for $\frac{1}{4}$ sec. cor., with brass cap mkd. |
| | $\frac{1}{4} \begin{array}{r} S7 \\ \hline S18 \\ 1937 \end{array}$ |
| | raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high N. of cor. |
| 41.70 | Wash, 10 lks. wide, 1 ft. deep, 2 ft. below $\frac{1}{4}$ sec. cor., with head 10 chains NE. drains S. 20°W. |
| 45.00 | Base of abrupt E. slope. 5 ft. above wash, bears N. and S. |
| 52.40 | Narrow spur, 160 ft. above base of steep asc.; projects S. 15°W.; desc. abrupt W. slope. |
| 60.60 | Base of abrupt desc. 190 ft. below spur, bears N. 10°W. and S. 10°E. over gentle rolling southerly slope. |
| 80.00 | 15 ft. below base of abrupt desc. Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground for the cor. lots 7 and 8, sec. 7, and lots 1 and 2, sec. 18, with brass cap mkd. |
| | $\begin{array}{r} S7 \\ 7 8 \\ \hline 2 1 \\ S18 \\ 1937 \end{array}$ |
| | raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor. |
| 82.60 | Wash, 20 lks. wide, 3 ft. deep, 15 ft. below base of abrupt desc., draining S. |
| 88.10 | 23 ft. above wash on asc. bearing NE. and SW. Intersect W. bdy. of Tp. at a point 2.70 chains N. of cor. of secs. 12 and 13 of Tp. 5 S., R. 19 E. Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground for closing cor. of secs. 7 and 18. |
| | $\begin{array}{r l} T5S & T5S \\ R19E & R20E \\ S12 & .S7 \text{ CC} \\ \hline & S18 \\ 1937 & \end{array}$ |
| | raise a mound of stone, 4 ft. base, $2\frac{1}{2}$ ft. high E. of cor. |
| | Land, broken and rolling desert; general southerly exposure and drainage. |

SUBDIVISION OF TOWNSHIP 5 SOUTH, RANGE 20 EAST

Chains

Soil, coarse sandy clay; 3rd rate, with sandstone surface rock.

No timber.

Undergrowth, scattered shadscale, sagebrush and cotton brush.

Fair grazing land.

N. 0°04'W., bet. secs. 7 and 8.

Over broken and rolling desert through medium dense undergrowth; desc. NE. slope 25 ft.

2.80 Wash, 10 lks. wide, 1 ft. deep, drains S. 60°E.; over rolling southeasterly slope.

14.60 Wash, 10 lks. wide, 1 ft. deep, drains S. 10°E.; 20 ft. above previous wash; asc. abrupt SW. slope.

22.90 S. edge of flat topped spur, 130 ft. above wash, bears irregularly S. 60°E. and N. 60°W.

33.50 N. edge of flat topped spur, bears E. and W.; desc. abrupt N. slope.

40.00 70 ft. below spur on NE. slope

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground for $\frac{1}{4}$ sec. cor., with brass cap mkd.

$\frac{1}{4}$
S7 | S8

1937

A juniper limb, 3 ins. diam., bears N. 47 $\frac{1}{4}$ °E., 12 lks. dist., mkd. BT.

A juniper limb, 3 ins. diam., bears N. 86°W., 25 lks. dist., mkd. BT..

Along broken E. slope.

49.60 Wash, 6 lks. wide, 2 ft. deep, 45 ft. below $\frac{1}{4}$ sec. cor. drains E. 6 chains; thence southeasterly; asc. SW. slope.

61.50 Spur, 70 ft. above wash, projects SE., desc. NE. slope.

75.30 Wash, 10 lks. wide, 1 ft. deep, 35 ft. below spur, drains SE.; asc. slight SE. slope.

80.00 On small spur, 50 ft. above wash, slopes SE.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground for cor. of secs. 5, 6, 7, and 8, with brass cap mkd.

T5S R20E
S6 | S5
S7 | S8

1937

SUBDIVISION OF TOWNSHIP 5 SOUTH, RANGE 20 EAST

Chains

raise a mound

of stone, 4 ft. base, 2½ ft. high, W. of cor.

Land, broken and rolling desert; general SE; exposure and drainage.

Soil, coarse sandy clay; 3rd rate, with sandstone surface rock.

Timber, scattered juniper,

Undergrowth, medium dense shadscale, sagebrush, and cotton brush.

Fair grazing land.

East on a random line bet. secs. 5 and 8.

40.00 Set temp. ¼ sec. cor.

80.04 Intersect cor. of secs. 4, 5, 8; and 9.

Thence

West, on true line bet. secs. 5 and 8:

Over broken and rolling desert, through medium dense undergrowth; asc. northeasterly slope 45 ft.

3.40 Knoll on end of spur from N.; desc. N. slope.

11.20 Main wash, 30 lks. wide, 3 ft. deep, 30 ft. below knoll, drains S. 20°E.; asc. NE. slope.

18.90 End of spur, 35 ft. above wash, slopes S. 30°E.; desc. SW. slope.

28.30 Wash, 10 ft. below spur, drains S. 70°E.; asc. over broken E. slope.

40.02 35 ft. above wash.

Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground to bedrock, with sandstone 8x8x6 ins. mkd. Y, deposited at the base and in a mound of stone 5 ft. base to top, for ¼ sec. cor., with brass cap mkd.

S5

—
S8

1937

58.10 E. edge of flat topped spur, 100 ft. above sec. cor., bears S. 30°E. and N. 30°W.

66.10 W. edge of flat topped spur, bears N. 30°W. and S. 30°E.; desc. abrupt SW. slope.

70.40 Wash, 10 lks. wide, 2 ft. deep, 90 ft. below spur, drains S. 30°E.; asc. NE. slope.

80.04 50 ft. above wash, on crest of small spur.

The cor. of secs. 5, 6, 7, and 8.

SUBDIVISION OF TOWNSHIP 5 SOUTH, RANGE 20 EAST

Chains

Land, broken and rolling desert; general SE. exposure and drainage.

Soil, coarse sandy clay; 3rd rate; with sandstone surface rock.

Timber, scattered juniper.

Undergrowth, medium dense shadscale, sagebrush, and cotton brush.

Fair grazing land.

West, bet. secs. 6 and 7; desc. SW. slope.

Desc. SW. slope.

3.30 Wash, 40 ft. below sec. cor., 12 lks. wide, 2 ft. deep, drains SE.; asc. 20 ft. over rolling easterly slope.

15.00 Asc. 150 ft. over steep easterly slope, through scattering juniper timber.

thence

23.10 Top of steep asc. /over rolling bench.

28.80 Desc. 90 ft. over steep W. slope.

33.50 Asc. 90 ft. over steep E. slope.

38.10 Desc. 70 ft. over abrupt SW. slope.

40.00 Set an iron post, 3 ft. long, 27 ins. in the ground, with a sandstone, 12x10x3 ins., mkd. X, deposited at base, for 1/4 sec. cor., with brass cap mkd.

S 6
 1/4 —
 S 7
 1937

No suitable accessories.

Desc. 90 ft. over abrupt broken southwesterly to westerly slope;

Descend 100 ft.

over rolling to broken land draining generally NW.

80.00 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground for the cor. of lots 10 and 11, sec. 6, and lots 1 and 2, sec. 7, with brass cap mkd.

T5S R20E
 S6
 10 | 11
 2 | 1

1937

raise a mound

of stone, 2 ft. base, 1 1/2 ft. high N. of cor.

83.80 Wash, 30 lks. wide, 4 ft. deep, drains irregularly SW.

87.95 Intersect the W. bdy. of the township at a point 2.89 chains N. of the cor. of secs. 1 and 12, T. 5 S., R. 19 E. heretofore described.

SUBDIVISION OF TOWNSHIP 5 SOUTH, RANGE 20 EAST.

Chains

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for the closing cor. of secs. 6 and 7, with brass cap mkd.

| | |
|------|-------|
| T5S | T5S |
| R19E | R20E |
| S1 | S6 CC |
| | S7 |
| | 1937 |

raise a mound of stone, 2 ft. base, 1½ ft. high, E. of cor.

Land, nearly level, rolling and broken.

Soil, sandy, clay and rocky; 4th rate.

Timber, scattering juniper.

Undergrowth, sagebrush, cotton brush and shadscale.

Poor grazing land.

N.0°05'W., on a random line bet. secs. 5 and 6.

40.00 Set temp. ¼ sec. cor.

78.11 Intersect N. bdy. of Tp. at a point 7 lks. W. of the cor. of secs. 5, 6, 31 and 32.

Thence

S.0°02'E., on true line bet. secs. 5 and 6.

Over nearly level bench; through scattered juniper and medium dense undergrowth.

15.30 Abandoned road, bears N.80°W. and S.80°E.

30.40 Wash, in small draw, 10 ft. below sec. cor., 20 lks. wide, 2 ft. deep, drains S.80°E.

38.11 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with 1 qt. of charcoal deposited at the base, for ¼ sec. cor., with brass cap mkd.

| |
|-------|
| ‡ |
| S6 S5 |
| 1937 |

No suitable accessory.

44.00 S. edge of bench bears S.80°E. and N.80°W.; desc. abrupt southerly slope.

47.40 Wash, 10 lks. wide, 2 ft. deep, 85 ft. below bench, drains S.80°E.

47.60 Graded road bet. LaPoint, Utah, and Vernal, Utah, bears S.80°E. and N.80°W.; asc. northerly slope.

SUBDIVISION OF TOWNSHIP 5 SOUTH, RANGE 20 EAST.

Chains

- 56.10 Over bench land, 80 ft. above wash.
- 62.60 Desc. steep southwesterly slope 25 ft.
- 70.10 Wash, 10 lks. wide, 2 ft. deep, drains SE.; asc. NE. slope.
- 78.11 Spur, 25 ft. above wash, projects SE.

Intersect cor. of secs. 5, 6, 7 and 8.

Land, broken and rolling desert; general SE. exposure and drainage.

Soil, coarse sandy clay; 3rd rate, with sandstone surface rock.

Timber, scattered juniper.

Undergrowth, scattered shadscale, sagebrush and cotton brush.

Fair grazing land.

GENERAL DESCRIPTION

The land in T. 5 S., R. 20 E. is principally rough and broken bad lands, breaking off from rolling bench land in the north and west. It varies in elevation about 5000 to 5800 feet above sea level. The soil is a red sandy clay lying on sandstone bedrock. It is several feet deep on the bench land and supports a dense growth of short undergrowth and grass. On the bad lands it varies in depth from a few feet to surface rock, here it supports scattering to medium dense undergrowth and grass. There is a scattering growth of juniper on the northern portion of the township.

The northern, eastern, and central portions of the township are drained by a dry creek which leaves the township near the standard corner of sections 35 and 36. The western portion drains into Halfway Hollow, a dry creek, which crosses the southwestern portion of the township. The lack of sufficient water makes the township unsuitable for agriculture. It is used for a winter and early spring grazing ground for sheep.

Small reservoirs, for the watering of sheep, have been built in the NW. quarter NE. quarter section 13, in the SE. quarter SW. quarter section 2, and in the W. half SE. quarter section 16.

A bench mark of the U. S. Geological Survey, a brass tablet set in a sandstone ledge, marked 5701 feet above sea level, is situated in the NE $\frac{1}{4}$ section 6.

GENERAL DESCRIPTION TOWNSHIP 5 SOUTH, RANGE 20 EAST

Chains

A triangulation station and bench mark of the U. S. Geological Survey, a brass tablet set in surface rock, mkd. with a cross (X) with a triangle, and the figures 5543 ft. above sea level, is situated in the SE quarter sec. 31.

No evidence of mineral or coal was noted.

U. S. Highway No. 40, between Vernal and Gusher, Utah crosses through sections 34, 35, 36, 25, and 24. A graded road from Maesser to LaPoint, Utah crosses the northwestern portion of the township. There are numerous unimproved roads in the township.

There were no settlers in the township at the time of the survey.

The mean magnetic declination is 15°50'E.

BOOK A-522

4-680
(August, 1926)

FIELD ASSISTANTS.

| NAMES. | CAPACITY. |
|---------------------|----------------------|
| LeGrande Fowlke, | Principal Assistant. |
| Eugene J. Holmes, | Chainman. |
| Alton Vernon, | Flagman. |
| Earl G. Reese, | Flagman. |
| O. V. Anderson, Jr. | Cornerman. |
| Lee Simmons, | Axeman. |
| H. J. Goodsell, | Axeman. |
| William Anderson, | Axeman. |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |

CERTIFICATE OF UNITED STATES SURVEYORS

We, Robert C. Yundt, James W. Hardison, Ervine F. Smith, U. S. Surveyor, hereby certify upon honor that, in pursuance of special instructions received from the District Cadastral Engineer for Utah, bearing date of the first day of August, 1936, I have well, faithfully, and truly in my own proper person and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, surveyed all those parts or portions of a Dependent Resurvey of the Third Standard Parallel South, through Range 20 East, and of the North and West boundaries, and the survey of the Subdivisions of T. 5 R. 20 E.,

of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by us and under our direction; and that all the corners of said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the District Cadastral Engineer for Utah, and in the specific manner described in the field notes, and that the foregoing are the original field notes of such survey.

Certified to at Salt Lake City, Utah, May 14, 1937, [Signature] Surveyor, U. S. Surveyor, May 27, 1937, James W. Hardison Public Land Surveyor, July 6, 1937, Ervine F. Smith Transitman, APPROVAL

OFFICE OF U. S. SUPERVISOR OF SURVEYS, DENVER, COLORADO FEB 18 1938, 19

The foregoing field notes of ~~the survey~~ a Dependent Resurvey of the Third Standard Parallel South, through Range 20 East, and of the North and West boundaries, and the survey of the Subdivisions of Township 5 South, Range 20 East, Salt Lake Meridian, Utah,

executed by Robert C. Yundt, Surveyor, James W. Hardison, Public Land Surveyor, and Ervine F. Smith, Transitman, under my special instructions dated August 1, 1936, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

[Signature] U. S. Supervisor of Surveys.

I certify that the foregoing transcript of the field notes of the above described surveys in ~~the original notes~~, has been correctly copied from the original notes ~~and the original notes~~

[Signature] U. S. Supervisor of Surveys.