

Volume

#

R0530

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD NOTES

A 530

Of the Meridian,

In the State of

EXECUTED BY

Under special instructions dated, 19....., which provided
for the surveys included under Group No., approved
and assignment instructions dated, 19.....

Survey commenced, 19.....

Survey completed, 19.....

INDEX DIAGRAM

Township 7 North, Range 2 East
35 34 33 32 30 29

28	• 91	• 76	• 66	• 56	• 46	• 22
	91	90	76	65	55	45
27	• 89	• 75	• 64	10 54	11 44	18 21
	88	88	74	63	53	43
26	18 87	17 73	16 62	15 52	14 42	13 20
	86	85	72	61	51	41
26	19 84	20 71	21 61	22 50	23 40	24 19
	83	82	71	60	50	39
24	30 81	29 69	28 59	27 49	26 38	25 18
	80	79	68	58	48	37
23	31 78	32 67	33 57	34 47	35 36	36 17
	11	12	13	14	15	16

INDEX DIAGRAM

Township 7 North, Range 3 East

		116	117	118	119	120	121					
177	•	177	•	159	•	149	•	140	•	130	•	110
		125		125		159		148		139		129
176	•	173	•	158	•	147	•	138	•	128	•	111
		172		171		157		147		138		128
173	•	170	•	156	•	146	•	136	•	127	•	112
		168		168		155		145		136		126
170	•	167	•	154	•	144	•	135	•	125	•	113
		165		165		153		144		134		124
166	•	164	•	152	•	143	•	133	•	124	•	114
		162		162		151		142		132		123
164	•	160	•	150	•	141	•	131	•	122	•	115
		159		159		141		131		122		115
		109		108		107		106		105		104

INDEX DIAGRAM

Township 10 North, Range 2 East

6	5	4 259	3	2	1
7	8	9	10	11	12
13	17	16	15	14	13
19	20	21	22	23	24
29	28	28	27	26	25
31	32	33	34	35	36

4

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD NOTES

Of the Meridian,

In the State of

EXECUTED BY

Under special instructions dated, 19....., which provided
for the surveys included under Group No., approved
and assignment instructions dated, 19.....

Survey commenced, 19.....

Survey completed, 19.....

4A

INDEX DIAGRAM

Township 10 North, Range 5 East

290 281	364 280	344 278	333 277	276	275
362 •	363 •	343 •	332 •	325 •	301 •
288	361	360	362	320	314
362 •	359 •	341 •	329 •	312 •	299 •
285	358	357	340	328	311
359 •	356 •	339 •	327 •	308 •	297 •
286	355	353	337	321	308
355 •	352 •	336 •	320 •	306 •	295 •
285	351	350	335	318	305
351 •	349 •	333 •	317 •	304 •	293 •
284	348	347	324	316	303
345	345	322	314	302	291
284	345	345	314	302	291

INDEX DIAGRAM

Township....., Range.....

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

6A

UNITED STATES DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
WASHINGTON, D. C. 20250

INDEX DIAGRAM

Township _____, Range _____

6	5	4	3	2	1
7	8	9	10	11	12
13	14	15	16	17	18
19	20	21	22	23	24
25	26	27	28	29	30
31	32	33	34	35	36

R530

ORIGINAL

UNITED STATES
DEPARTMENT OF THE INTERIOR
GENERAL LAND OFFICE
BUREAU OF LAND MANAGEMENT

1944

A
FIELD NOTES

DEPENDENT RESURVEY OF

EAST BOUNDARY OF T. 7 N., R. 1 E.,

SOUTH BOUNDARY OF T. 8 N., R. 2 E.,

AND OF

SOUTH AND EAST BOUNDARIES

AND SUBDIVISIONAL LINES OF

T. 7 N., R. 2 E.,

Of the Salt Lake Meridian,

the State of Utah

EXECUTED BY

Ralph Gentry, Cadastral Engineer, Robert C. Yundt, Associate
Cadastral Engineer, and Wilson McConkie, Assistant Cadastral
Engineer

Under special instructions dated October 19, 1939, which provided
for the surveys included under Group No. 306, bearing the approval of the
Commissioner of the General Land Office under date of Jan. 3, 1940
and assignment instructions dated May 8, 1941, and supplemental
assignment instructions dated June 17, 1944.

Survey commenced May 19, 1941

Survey completed August 22, 1944

INDEX DIAGRAM.

Township 7 North, Range 2 East

	27	26	25	23	22	21
20	83	82	81	80	79	78
19	77	76	75	74	73	72
18	71	70	69	68	67	66
17	65	64	63	62	61	60
16	59	58	57	56	55	54
15	53	52	51	50	49	48
	47	46	45	44	43	42
	41	40	39	38	37	36
	35	34	33	32	31	30
	29	28	27	26	25	24
	23	22	21	20	19	18
	17	16	15	14	13	12
	11	10	9	8	7	6
	5	4	3	2	1	

DEPENDENT RESURVEY OF T. 7 N., R. 2 E., SALT LAKE MERIDIAN.

Chains

The official survey of T. 7 N., R. 2 E., Salt Lake Mer., is shown upon the township plats approved November 14, 1871, and October 19, 1894. The following field notes are those of a dependent resurvey or reestablishment of the south, east, west, and north boundaries, and of the subdivision of the township.

Before reconstructing or restoring the corners, the lines of the original survey were retraced, and search was made for evidence of the original corner monuments, and other calls of the field notes. When duly identified or restored, the corner positions were remonumented.

The rules of proportionate measurement were applied in order to ascertain the position of each lost corner, after completing the necessary retracements to connect with the identified corner locations; but not until exhausting every reasonable possibility of finding direct evidence for the control of each particular corner.

In order to simplify the record, the true line notes only are supplied here, which refer to the completed resurvey.

Survey commenced May 19, 1941, and executed with Buff and Buff transit No. 9302 used by Ralph Gentry, Cadastral Engineer, and W. & L. E. Gurley transit No. 262684, used by Wilson McConkie, Assistant Cadastral Engineer. The field survey was suspended October 15, 1941, and resumed August 3, 1944, and executed by Buff and Buff transits Nos. 9302 and 9797, used by Ralph Gentry, Cadastral Engineer, and Robert C. Yundt, Associate Cadastral Engineer respectively. The instruments are the property of the General Land Office, and are equipped with Smith solar attachments and full vertical circles; the horizontal limbs are provided with two double verniers placed opposite to each other, and read to single minutes of arc, which is also the least count of the verniers of the vertical circles, and of the latitude and declination arcs. The instruments were approved for use on this survey by the District Cadastral Engineer for Utah, conditional upon satisfactory field tests. The instruments were in good condition at the commencement of the survey, and were tested and found free from any appreciable error.

The direction of the lines were determined by the solar transit method. The measurements were made with Lallie steel tapes, 5 chains in lenth, graduated every link for the first 100 links, and thereafter at intervals of 10 links. The tapes were tested by comparison with a Lufkin standard steel tape one chain long and found correct. The measurements were made on the slope, and the vertical angle of each interval was ascertained by clinometers in good adjustment; the horizontal equivalents are entered in the field note record.

The approximate geographic position of the SE. cor. of the township, as determined through ties of public land surveys to triangulation stations of the U.S.C. & G. S., located in T. 8 N., R. 2 E., and T. 7 N., R. 1 W., is as follows: latitude 41° 17.5' N., longitude 111° 40' W.

May 19, 1941, at camp located about in the center of sec. 33, T. 7 N., R. 2 E., approximate latitude 41° 18' N., longitude 111° 44' W., at 5h 23m 28s p.m., by my watch which carries correct 105th meridian time as determined by radio signals, or 4h 56m 32s p.m., l.m.t, I make an hour angle observation on Polaris, west of the meridian, two each with the telescope in direct and reversed

DEPENDENT RESURVEY OF T. 7 N., R. 2 E., SALT LAKE MERIDIAN.

Chains

positions, reading the horizontal deflection angle from Polaris, east to a well defined reference point on ridge about two miles north.

Azimuth of Polaris,	1° 18' W.
Mean deflection angle	1° 09'
True bearing of reference point	N. 0° 09' W.
Observed magnetic declination	18° 00' E.

May 20, 1941, in order to verify the latitude of this station, we make a meridian observation of the sun, observing the altitude of the sun's lower limb with the telescope in direct position, reversing the transit and observing the sun's upper limb:-

Apparent time of observation,	noon
Mean observed altitude of the sun	68° 43.5'
Reduced latitude:	41° 18' N.

Every hour from 7:30 to 10:30 a.m., and from 1:30 to 5:30 p.m., we make proper settings on the arcs of the solar attachments of each instrument and ascertain that the resulting orientation of the instruments, when compared with the meridian established by Polaris observations has a maximum error of less than 1' 30".

June 23, 1944, at camp located in the SE $\frac{1}{4}$ sec. 16, T. 7 N. R. 3 E., approximate latitude 41° 20' N., longitude 111° 37' W., at 4h 46m 38s a.m., by my watch which carries correct 105th meridian time as determined by radio signals, or 4h 20m 10s a.m., l.m.t., I make an hour angle observation on Polaris, east of the meridian, two each with the telescope in direct and reversed positions, reading the horizontal deflection angle from Polaris, west to a well defined reference point on spur about a half mile north.

Mean deflection angle	1° 04'
Azimuth of Polaris	1° 02' E
True bearing of reference point	N. 0° 02' W.
Observed magnetic declination	18° 00' E

Every hour from 7:30 to 10:30 a.m., and from 1:30 to 5:30 p.m., we make the proper settings on the arcs of the solar attachment of each instrument and ascertain that the resulting orientation of the instruments, when compared with the meridian established by Polaris observations has a maximum error of less than 1' 30".

Conditions permitting, the arcs were tested daily by noon observations, and meridional indications of the solar attachments verified at frequent intervals throughout this survey.

DEPENDENT RESURVEY OF SOUTH BOUNDARY OF T. 7 N., R. 2 E.

Reestablishment of surveys executed by J. Fewson Smith, Deputy Surveyor, in 1871, and resurveyed by John T. Brackbn, Deputy Surveyor, in 1893.

The position of the cor. of Tps. 6 and 7 N., Rs. 1 and 2 E., marked by a quartzite, 14x12x5 ins., buried 12 ins. in center of road, bearing E. and W., and in line with fence to the south, was identified to me as marking the original position of the township cor., by George Staples, Eden, Utah, owner of land to the SE., and by Earl Thompson, Eden, Utah, owner of the land to the SW. I mark


DEPENDENT RESURVEY OF SOUTH BOUNDARY OF T. 7 N., R. 2 E.

Chains

this stone with 6 notches on N., S., E., and W. edges, and reset it 12 inches below surface of the ground, for the cor. of Tps. 6 and 7 N., Rs. 1 and 2 E., and at a point

South, 37 lks. dist.

Set an iron post, 3 ft. long, 3 ins. diam., 27 ins. in the ground, for witness cor. to cor. of Tps. 6 and 7 N., Rs. 1 and 2 E., with brass cap marked



.1941

This witness cor. stands on S. side of road in fence line bearing E., W. and S.

From the cor. of Tps. 6 and 7 N., Rs. 1 and 2 E.

S. 89° 49' E., between secs. 6 and 31.

Along road, over gently rolling land. Land is cultivated to the N. and S. of road.


40.00 Proportionate dist.; in center of road, bearing E. and W.

No evidence of 1/4 sec. cor. found.

Set a sandstone, 18x7x4 ins., marked 1/4 on N. face, 12 ins. below surface of the ground, for 1/4 sec. cor., and at a point

South, 37 lks. dist., on S. side of road in fence line.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for witness 1/4 sec. cor., with brass cap marked



.1941

raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.

42.70 End of cultivated land S. of the road, bears S., and W.

79.50 Telephone line, bears N. and S.

80.00 Proportionate dist.; in road, bears N., S., and W.

No evidence of the sec. cor. found.

Set a sandstone, 15x7x6 ins., marked 1 notch on W., and 5 notches on E. edge, 12 ins. below the surface of the ground, for cor. of secs. 5, 6, 31, and 32, and at S. 89° 49' E., 40 lks. dist., on E. side of road.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for witness cor. of secs. 5, 6, 31, and 32, with brass cap marked

DEPENDENT RESURVEY OF SOUTH BOUNDARY OF T. 7 N., R. 2 E.

Chains

20150

T6N R2E
 S31 | S32
 WQ. 4 | S 5
 T6N

1941.

stone, 3 ft. base, 2 ft. high, W. of cor. raise a mound of
 Land, gently rolling.
 Soil, sandy and gravelly loam; 1st to 2nd rate.
 Most of land cultivated; grain and alfalfa are main crops

S. 89° 49' E., between secs. 5 and 32.

Over gently rolling land.

0.40 The witness cor. of secs. 5, 6, 31, and 32, in fence line on E. side of road, bears N. and S. Enter medium dense undergrowth, an scattered cottonwood trees.

17.00 Branch of Middle Fork of Ogden River, stream of clear water, 25 lks. wide, course S. 20° W.

27.00 Middle Fork of Ogden River, stream of clear water, 30 lks. wide, course SW.; ascend NW. slope, leaving cottonwood trees.

40.00 On NW. slope, 250 ft. above sec. cor.

The $\frac{1}{4}$ sec. cor., which is a quartzite, 24x8x6 ins., marked with $\frac{1}{4}$ on N. face, set in old mound of stone.

At point for cor.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with original cor. stone deposited at base, for $\frac{1}{4}$ sec. cor., with brass cap marked

S 32

S 5

1941

stone, 3 ft. base, 3 ft. high, N. of cor. raise a mound of

Thence

S. 89° 43' E., between secs. 5 and 32.

21.00 Top of ascent, 240 ft. above $\frac{1}{4}$ sec. cor., slopes N. 20° W.; descend NE. slope.

32.00 Head of draw, 40 ft. below top of ascent, course N.; ascend NW. slope.

40.17 On NW. slope, 320 ft. above $\frac{1}{4}$ sec. cor.

The cor. of secs. 4, 5, 32, and 33, which is a sandstone, 12x7x6 ins., marked with 2 notches on W., and 4 notches on E. edge, firmly set and unwitnessed.


At point for cor.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, with original cor. stone deposited at base, for

DEPENDENT RESURVEY OF SOUTH BOUNDARY OF T. 7 N., R. 2 E.

Chains

cor. of secs. 4, 5, 32, and 33, with brass cap marked



1941

raise a mound of stone, 3 ft. base, 3 ft. high, W. of cor.

Cor. stands at cor. of old fence line, bearing E., W., and S.

Land, gently rolling on W. portion, and mountainous on E. portion of mile. Soil, gravelly and rocky on W. portion, 3rd rate, and dark rocky sandy loam; 2nd rate, on E. portion. Timber, scattered cottonwood on W. portion of mile. Undergrowth, choke cherry, sagebrush, oak, maple, and honeysuckle. Medium growth of grass and weeds. Good grazing land.


S. 89° 39' E., between secs. 4 and 33.

Ascend NW. slope, through medium dense undergrowth.

38.26 Proportionate dist.; on NW. slope, 600 ft. above sec. cor.

No evidence of 1/4 sec. cor. found.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/4 sec. cor., with brass cap marked



1941

raise a mound of stone, 3 1/2 ft. base, 3 ft. high, N. of cor.

Reestablishment of surveys executed by John T. Breckon, Deputy Surveyor, in 1893.

45.00 Top of ascent, 100 ft. above 1/4 sec. cor., slopes N.; descend NE. slope.

56.00 Draw, 30 ft. below top of ascent, course N.; ascend steep NW. slope.

64.50 Rocky spur, 460 ft. above 1/4 sec. cor., projects S. 15° W.; descend E. slope.

75.16 On E. slope, 330 ft. below spur.

The cor. of secs. 33 and 34, which is a sandstone, 10x10x10 ins., marked with 3 notches on E. and W. edges, firmly set and unwitnessed.

At point for cor.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, with original cor. stone, deposited at base, for cor. of secs. 33 and 34, with brass cap marked

DEPENDENT RESURVEY OF SOUTH BOUNDARY OF T. 7 N., R. 2 E.

Chains

aniam0

T7N	R2E
S33	S34
T6NR2E	
S 4	

1941

raise a mound of stone, 3 ft. base, 3 ft. high, N. of cor.

Land, mountainous; steep slopes.
 Soil, dark rocky sandy clay loam; 2nd to 3rd rate.
 No timber.
 Undergrowth, honeysuckle, oak, maple, choke cherry, and sagebrush. Medium growth of grass and weeds.
 Good grazing land.

S. 89° 21' E., along S. bdy. of sec. 34.

Descend E. slope, through dense undergrowth.

- 1.63 The closing cor. of secs. 3 and 4, T. 6 N., R. 2 E., which is a quartzite, 12x8x4 ins., marked with 3 notches on E. and W. edges, and CC on S. face, firmly set in the ground and in mound of stone.
- 6.00 Draw, 60 ft. below sec. cor., course S. 20° E.; ascend.
- 9.80 Top of ascent, 40 ft. above draw, slopes S.; descend.
- 12.80 Draw, 40 ft. below top of ascent, course SW.; ascend.
- 21.00 Top of ascent, 150 ft. above draw, slopes S. 30° W.; descend.
- 25.10 Draw, 70 ft. below top of ascent, course S. 20° W.; ascend over rocky SW. slope.
- 40.04 Proportionate dist.; on rocky SW. slope, 410 ft. above sec. cor.

No evidence of $\frac{1}{4}$ sec. cor. found.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$ S 34

1941

raise a mound of stone, 3 ft. base, 3 ft. high, N. of cor.

79.00 Rim of mountain, 690 ft. above sec. cor., bears NW., and S. 15° W.; thence over rolling mountain top.

80.08 The cor. of secs. 34 and 35, which is a quartzite, 22x10x6 ins., marked with 4 notches on W., and 2 notches on E. edge, firmly set in the ground and mound of stone.

At point for cor.

Set an iron post, 3 ft. long, 2 ins. diam., 18 ins. in the ground, to solid rock, and in mound of stone to top, with original cor. stone deposited at base, for cor. of secs. 34 and 35, with brass cap marked

DEPENDENT RESURVEY OF SOUTH BOUNDARY OF T. 7 N., R. 2 E.

Chains

T7N	R2E
S34	S35

T6NR2E

S 3

1941

Land, mountainous; steep rocky slopes.
Soil, rocky sandy clay loam; 2nd to 4th rate.
No timber.

Undergrowth, maple, oak, sagebrush, mountain laurel, and honeysuckle. Medium growth of grass and weeds.
Good grazing land.

S. 89° 34' E., along S. bdy. of sec. 35.

Over rolling mountain top, through scattered undergrowth.

1.46 Fall 10 lks. S. of the closing cor. of secs. 2 and 3, T. 6 N., R. 2 E., which is a quartzite, 20x12x3 ins., marked with 4 notches on W., 2 notches on E. edge, and CC on S. face, firmly set in mound of stone.

34.00 Edge of mountain top, bears N. and S.; descend over NE. slope, entering dense undergrowth.

40.00 Proportionate dist.; on NE. slope, 80 ft. below top of mountain.

No evidence of $\frac{1}{4}$ sec. cor. found.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., sec. 35 only, with brass cap marked

$\frac{1}{4}$	S35
---------------	-----

1941

raise a mound of stone, 3 ft. base, 3 ft. high, N. of cor.

56.70 Head of draw, 130 ft. below $\frac{1}{4}$ sec. cor., course N. 30° E.; ascend NW. slope, entering scattered fir timber.

72.00 Rocky spur, 110 ft. above draw, projects N. 15° E.; descend abrupt NE. slope.

80.00 On steep NE. slope, 110 ft. below spur.

The cor. of secs. 35 and 36, which is a sandstone, 16x10x4 ins., marked with 5 notches on W., and 1 notch on E. edge, firmly set in the ground and in mound of stone.

At point for cor.

Set an iron post, 3 ft. long, 2 ins. diam., 10 ins. in the ground to solid rock and in a mound of stone to top, with original cor. stone deposited at base, for cor. of secs. 35 and 36, with brass cap marked

T7N	R2E
S35	S36
T6NR2E	
S 2	

1941

from which

DEPENDENT RESURVEY OF SOUTH BOUNDARY OF T. 7 N., R. 2 E.

Chains

amfnd

A Douglas fir, 10 ins. diam., bears N. 7° E., 108 lks. dist., marked T7NR2ES36BT.

A Douglas fir, 6 ins. diam., bears N. 51° 45' W., 113 lks. dist., marked T7NR2ES35BT.

Land, mountainous; rolling mountain top on W. portion and rolling to steep slopes on E. portion of mile.
Soil, rocky sandy clay loam; 3rd rate.
Timber, scattered Douglas fir on E. portion of mile.
Undergrowth, sagebrush, oak, maple, choke cherry, and honeysuckle. Medium growth of grass and weeds.
Good grazing land.

S. 89° 20' E., along S. bdy. of sec. 36.

Descend steep NE. slope, through medium dense undergrowth and scattered timber.

3.50 Rocky outcropping, bears NE. and SW.

13.30 Draw, 320 ft. below sec. cor., course N. 30° E.; ascend along N. to NW. slope.

29.80 Sandstone outcrop, bears N. 20° E., and S. 20° W.

36.00 Rocky spur, 220 ft. above draw, projects N.; descend over abrupt NE. slope over sandstone outcroppings.

39.65 On steep rocky NE. slope, 120 ft. below spur.

The $\frac{1}{4}$ sec. cor., which is a stationary sandstone, 24x16x9 ins.; above the ground, marked with $\frac{1}{4}$ on N. face, and witnessed by a mound of stone, 3 ft. base, 3 ft. high, to the N.

Thence

S. 89° 38' E., along S. bdy. of sec. 36.

6.00 Leave sandstone outcroppings, bears NE. and SW.

18.30 Small draw, 610 ft. below $\frac{1}{4}$ sec. cor., course NE.; descend along N. slope.

27.00 Descend steep NE. slope.

39.78 On NE. slope, 890 ft. below $\frac{1}{4}$ sec. cor.

The cor. of Tps. 7 N., Rs. 2 and 3 E., which is a red sandstone, 13x13x9 ins., marked with 6 notches on E., W., and N. edges, firmly set and witnessed by a mound of stone, 3 ft. base, 3 ft. high, N. of cor.

At point for cor.

Set an iron post, 3 ft. long, 3 ins. diam., 27 ins. in the ground, with original cor. stone deposited at base, for cor. of Tps. 7 N., Rs. 2 and 3 E., with brass cap marked

T7N	
R2E	R3E
S36	S31

SI

T6NR2E

1941

DEPENDENT RESURVEY OF SOUTH BOUNDARY OF T. 7 N., R. 2 E.

Chains

Land, mountainous; steep rocky slopes.
Soil, rocky sandy clay loam; 3rd to 4th rate.
Timber, very scattered Douglas fir.
Undergrowth, oak, maple, sagebrush, honeysuckle, and mountain laurel. Medium growth of grass and weeds.
Fair grazing land.

DEPENDENT RESURVEY OF EAST BOUNDARY OF T. 7 N., R. 2 E.

Reestablishment of surveys executed by John T. Brockon, Deputy Surveyor, in 1893.

From the cor. of Tps. 7 N., Rs. 2 and 3 E.

N. 0° 02' W., along E. bdy. of sec. 36.

Descend NE. slope, through dense undergrowth.

16.70 Stream of clear water, 4 lks. wide, in canyon, 160 ft. below Tp. cor., course S. 80° E.; ascend S. slope.

26.00 Ascend SE. slope.

35.00 Small draw, heads about 5 chs. NW., and drains S. 80° E.; continue ascent over SE. slope.

40.37 On SE. slope, 290 ft. above canyon.

The 1/4 sec. cor., sec. 36, which is a sandstone, 16x12x8 ins., marked with 1/4 on W. face, firmly set and unwitnessed.

At point for cor.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with original cor. stone deposited at base, for 1/4 sec. cor., sec. 36 only, with brass cap marked

1/4 S36

1941

stone, 3 ft. base, 3 ft. high, W. of cor. raise a mound of

Thence

N. 0° 22' W., along E. bdy. of sec. 36.

24.50 Spur, 170 ft. above 1/4 sec. cor., slopes SE.; descend NE. slope.

34.00 Ascend along gentle E. slope.

40.39 The cor. of secs. 25 and 36, which is a sandstone, 20x14x8 ins., marked with 5 notches on N., and 1 notch on S. edge, firmly set in the ground and in mound of stone.

At point for cor.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, with original cor. stone deposited at base, for cor. of secs. 25 and 36, with brass cap marked

DEPENDENT RESURVEY OF EAST BOUNDARY OF T. 7 N., R. 3 E.

Chains

chains

T7N
 R2E
 S25
 S36
 1941

raise a mound of stone, 3 ft. base, 3 ft. high, W. of cor.

Land, mountainous.
 Soil, rocky sandy clay loam; 2nd rate.
 No timber.
 Undergrowth, oak, maple, sagebrush, service berry, choke cherry, and honeysuckle. Medium growth of grass and weeds.
 Good grazing land.

N. 0° 10' E., along E. bdy. of sec. 25.

Along rolling E. slope, through medium dense undergrowth.

4.00 Draw, course SE.; ascend along rolling E. slope.

20.00 Ascend SE. slope.

34.00 Spur, 450 ft. above sec. cor., projects S. 20° W.; ascend along W. slope.

40.44 Proportionate dist.; on rolling W. slope.

No evidence of $\frac{1}{4}$ sec. cor. found.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., sec. 25 only, with brass cap marked.

$\frac{1}{4}$ S25

1941

raise a mound of stone, 3 ft. base, 3 ft. high, W. of cor.

61.30 Draw, course S. 15° W., from N. 20° W.; ascend SW. slope.

80.88 The cor. of secs. 24 and 25, which is a quartzite, 10x8x8 ins., marked with 4 notches on N., and 2 notches on S. edge, firmly set in the ground and in mound of stone.

At point for cor.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, with original cor. stone deposited at base, for cor. of secs. 24 and 25, with brass cap marked

T7N
 R2E
 S24
 S25
 T7N
 R3E
 S19

1941

raise a mound of stone, 3 ft. base, 3 ft. high, W. of cor.

Land, mountainous.
 Soil, rocky sandy clay loam; 2nd rate.
 No timber.

DEPENDENT RESURVEY OF EAST BOUNDARY OF T. 7 N., R. 2 E.

Chains

Undergrowth, sagebrush, oak, choke-cherry, service berry, honeysuckle, and mountain laurel. Medium growth of grass and weeds. Good grazing land.

N. 0° 23' E., along E. bdy. of sec. 24.

Ascend NW. slope, through dense undergrowth of mountain laurel.

3.00 Spur, 20 ft. above sec. cor., projects NE.; descend over N. slope, entering dense aspen timber, and scattered undergrowth of maple, choke cherry, honeysuckle, and mountain laurel.

8.00 Enter scattered fir and aspen timber.

15.75 Draw, 190 ft. below spur, course NE.; from S. 70° W.; ascend SE. slope.

32.00 Spur, 200 ft. above draw, projects NE.; descend over gentle N. slope.

40.54 Proportionate dist.; on N. slope, 100 ft. below spur.

No evidence of 1/4 sec. cor. found.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/4 sec. cor., sec. 24 only, with brass cap marked

1/4 S24

1941

from which

A Douglas fir, 14 ins. diam., bears S. 68° W., 129 lks. dist., marked 1/4 S24BT.

A balsam, 12 ins. diam., bears N. 27° W., 113 lks. dist., marked 1/4 S24BT.

45.70 Trail, bears N. 80° E., and S. 80° W.

45.80 Draw, 110 ft. below 1/4 sec. cor., course N. 80° E.; ascend SE. slope, entering dense aspen, and scattered undergrowth.

60.00 Spur, 270 ft. above draw, projects E.; descend NE. slope.

81.08 Proportionate dist.; on NE. slope, 250 ft. below spur.

No evidence of the cor. of secs. 13 and 24 found.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 13 and 24, with brass cap marked

T7N
R2E
S13
S24

T7N
R2E
S18

1941

from which

A balsam, 5 ins. diam., bears S. 39° W., 101 lks. dist., marked T7NR2ES24BT.

An aspen, 5 ins. diam., bears N. 74° W., 150 lks. dist., marked T7NR2ES13BT.

DEPENDENT RESURVEY OF EAST BOUNDARY OF T7N, R2E, S12E.

Chains

anishO

Land, mountainous, also some level. Soil, rocky sandy clay loam, 2nd rate. Timber, scattered to dense aspen, and scattered Douglas fir and balsam on portion of mile. Undergrowth, mountain laurel, choke cherry, maple, and honeysuckle. Medium growth of grass and weeds. Good grazing land.

N. 0° 23' E., along E. bdy. of sec. 13.

Descend NE slope, through dense undergrowth and scattered timber.

1.40 Draw, course S. 50° E.; trail along draw; ascend SW. slope leaving timber.

11.00 Enter medium dense timber, bears NW. and SE.

27.00 Enter scattered aspen.

34.00 Spur, 410 ft. above sec. cor., projects S. 50° E.; descend

40.54 Proportionate dist.; on gentle N. slope, 10 ft. below spur

No evidence of the 1/4 sec. cor. found.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/4 sec. cor., sec. 13 only, with brass cap marked

1/4 S13

1941

from which

An aspen, 6 ins. diam., bears S. 20° W., 73 lks. dist., marked 1/4 S13BT.

An aspen, 6 ins. diam., bears N. 75° 15' W., 35 lks. dist., marked 1/4 S13BT.

42.40 Small draw, course S. 80° E.; ascend S. slope.

53.00 Ridge, 60 ft. above draw, bears E. and W.; descend over rolling N. slope.

67.80 Draw, 70 ft. below ridge, course NE.; thence along E. slope.

81.08 Proportionate dist.; on rolling E. slope.

No evidence of the cor. of secs. 12 and 13 found.

Set an iron post, 3 ft. long, 1 1/2 ins. diam., 27 ins. in the ground, for cor. of secs. 12 and 13, with brass cap marked

T7N

R2E

S12

S13

T7N

R3E

S7

1941

from which

An aspen, 8 ins. diam., bears S. 75° 30' W., 18 lks. dist., marked T7NR2ES13BT.

DEPENDENT RESURVEY OF EAST BOUNDARY OF T. 7 N., R. 2 E.

Chains

An aspen, 8 ins. diam., bears N. 12° W.; 25 lks. dist., marked T7NR2ES12BT.

Land, mountainous.

Soil, rocky sandy clay loam; 2nd rate.

Timber, scattered to medium growth of aspen.

Undergrowth, mountain laurel, honeysuckle, choke cherry, sagebrush, oak, and maple. Medium growth of grass and weeds. Good grazing land.

N. 0° 23' E., along E. bdy. of sec. 12,

Along E. slope, through medium dense aspen timber, and medium dense undergrowth.

- 5.00 Descend NE. slope, entering scattered timber.
- 24.00 Draw, 350 ft. below sec. cor., course NW.; thence along W. slope.
- 27.70 Small stream of clear water, in canyon, course S. 70° W.; ascend SE. slope, leaving timber.
- 40.54 Proportionate dist.; on SE. slope, 350 ft. above canyon.
- No evidence of the $\frac{1}{4}$ sec. cor. found.
- Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., sec. 12 only, with brass cap marked
- $\frac{1}{4}$ S12
- 1941
- raise a mound of stone, 3 ft. base, 3 ft. high, W. of cor.
- 41.00 Spur, 20 ft. above $\frac{1}{4}$ sec. cor., projects S. 70° W.; descend NW. slope.
- 48.80 Draw, 240 ft. below spur, course S. 80° W.; ascend SW. slope.
- 55.00 Spur, 140 ft. above draw, slopes S. 70° W.; descend over rolling W. slope.
- 56.00 Head of small draw, course S. 80° W.; ascend.
- 61.00 Spur, 20 ft. above draw, slopes W.; descend NW. slope.
- 74.00 Draw, 160 ft. below spur, course S. 80° W.; ascend SW. slope.
- 78.00 Spur, 30 ft. above draw, slopes W.; descend NW. slope.
- 81.08 On NW. slope, 20 ft. below spur.

The cor. of secs. 1 and 12, which is a quartzite, 24x24x12 ins., marked with 1 notch on N., and 5 notches on S. edge, firmly set in the ground and in mound of stone.

At point for cor.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, with original cor. stone deposited at base, for

DEPENDENT RESURVEY OF EAST BOUNDARY OF T. 7 N., R. 2 E.

Chains

ariano

cor. of secs. 1 and 12, with brass cap marked

T7N	T7N
R2E	R3E
S 1	S 6
S12	

1941

from which

A Douglas fir, 16 ins. diam., bears S. 45° W., 173 lks. dist., marked T7NR2ES12BT.

A Douglas fir, 24 ins. diam., bears N. 7° W., 83 lks. dist., marked T7NR2ES1BT.

Land, mountainous.
Soil, rocky sandy clay loam; 2nd to 3rd rate.
Timber, scattered aspen and a few Douglas fir.
Undergrowth, choke cherry, maple, honeysuckle, mountain laurel, and sagebrush. Medium growth of grass and weeds.
Good grazing land.

N. 0° 16' W., along E. bdy. of sec. 1.

Descend NW. slope, through scattered timber and medium dense undergrowth.

- 4.80 Draw, 60 ft. below sec. cor., course W.; ascend SW. slope.
- 10.00 Leave timber.
- 12.00 Spur, 120 ft. above draw, slopes S. 80° W.; descend NW. slope.
- 17.00 Enter medium dense aspen timber, bears E. and W.
- 22.40 Small draw, course NW.; continue descent over NW. slope.
- 40.02 On narrow bench, 260 ft. below spur.

The sec. cor., which is a limestone, 16x10x4 ins., marked with ∇ on W. face, firmly set in the ground and in mound of stone.

At point for cor.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with original cor. stone deposited at base, for sec. cor., sec. 1 only, with brass cap marked

† S1

1941

from which

An aspen, 10 ins. diam., bears S. 21° 30' W., 81 lks. dist., marked †S1BT.

Raise a mound of stone, 3 ft. base, 5 ft. high, W. of cor.

Thence

N. 0° 44' E., along E. bdy. of sec. 6.

- 1.00 Rim of bench, bears NE. and SW.; descend NW. slope.

DEPENDENT RESURVEY OF EAST BOUNDARY OF T. 7 N., R. 2 E.

Chains

- 3.90 Stream of clear water, 10 lks. wide, in canyon, 60 ft. below 1/4 sec. cor., course S. 20° W.; dense willows and scattered cottonwood trees along creek; ascend SE. slope.
- 4.90 Trail along canyon, bears N. 20° E. and S. 20° W.
- 9.40 Top of ascent, thence along E. slope, leaving timber.
- 13.00 Small draw, course SE; ascend SE. slope.
- 20.40 Top of ascent, thence along E. slope.
- 37.15 On E. slope, 400 ft. above canyon.

The closing cor. of Tps. 7 N., Rs. 2 and 3 E., which is a sandstone, 12x7x5 ins., marked with 6 grooves on E. and W. faces, and 6 grooves and CC on S. face, firmly set and witnessed by a mound of stone, N. of cor.

At point for cor.

Set an iron post, 3 ft. long, 3 ins. diam., 18 ins. in the ground to solid rock, and in mound of stone to top, with original cor. stone deposited at base, for closing cor. of Tps. 7 N., Rs. 2 and 3 E., with brass cap marked

T8N2E

S36

S 1	S 6
R2E	R3E

T7N

CC

1941

From this closing cor., the cor. of Tps. 8 N., Rs. 2 and 3 E., bears S. 89° 55' E., 11.29 chs. dist.

Land, mountainous.
 Soil, rocky sandy clay loam; 2nd to 3rd rate.
 Timber, scattered aspen on S. portion of mile.
 Undergrowth, sagebrush, honeysuckle, and mountain laurel.
 Medium growth of grass and weeds. Good grazing land.

DEPENDENT RESURVEY OF EAST BOUNDARY OF T. 7 N., R. 1 E.

Reestablishment of surveys executed by J. Fewson Smith, Deputy Surveyor, in 1871.

From the cor. of Tps. 6 and 7 N., Rs. 1 and 2 E.

N. 0° 18' E., between secs. 31 and 36.

Over gently rolling land.

- 0.15 Canal, drains W.
- 0.40 Barbed wire fence, along N. side of road, bears E. and W.; enter cultivated land.
- 26.50 Barbed wire fence, bears E. and W.; leave cultivated land, and enter sagebrush undergrowth; ascend over gentle SW. slope.
- 34.80 Barbed wire fence, bears N. 68° W. and S. 68° E.


DEPENDENT RESURVEY OF EAST BOUNDARY OF T. 7 N., R. 10 E.

Chains

40.55

On gentle SW. slope, 80 ft. above T₁ cor.
 The $\frac{1}{4}$ sec. cor., which is a quartzite, 17x9x8 ins., marked with $\frac{1}{4}$ on W. face, firmly set in the ground and in mound of stone.

At point for cor.
 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with original cor. stone deposited at base, for $\frac{1}{4}$ sec. cor., with brass cap marked



stone, 3 ft. base, 3 ft. high, W. of cor. raise a mound of

Thence
 N. 0° 12' E., between secs. 31 and 36.

1.50

Enter cultivated land, bears E. and W..

9.95

Barbed wire fence, bears NW. and SE.; leave cultivated land, and enter medium dense undergrowth of sagebrush and scattered oak brush.

27.00

Small stream of clear water, course SW.


30.00

Small stream of clear water, course SW.

40.36

On rolling rocky SW. slope, 260 ft. above $\frac{1}{4}$ sec. cor.
 The cor. of secs. 25, 30, 31, and 36, which is a quartzite, 18x12x5 ins., marked with 5 notches on N., and 1 notch on S. edge, firmly set in the ground and in old mound of stone

At point for cor.
 Set an iron post, 3 ft. long, 2 ins. diam., 20 ins. in the ground to solid rock, and in mound of stone to top, with original cor. stone deposited at base, for cor. of secs. 25, 30, 31, and 36, with brass cap marked



1941

Land, gently rolling with SW. exposure.
 Soil, sandy clay loam on S. portion and gravelly and rocky on N. portion; 1st to 3rd rate.
 No timber.
 Undergrowth, sagebrush and oak. Medium growth of grass and weeds. Good grazing land.

N. 0° 09' E., between secs. 25 and 30,

Ascend gradually over rolling SW. slope, through medium dense sagebrush and oak.

DEPENDENT RESURVEY OF EAST BOUNDARY OF T. 7 N., R. 1 E.


Chains

- 16.10 Stream of clear water, 20 lks. wide, course SW.
- 18.80 Stream of clear water, 15 lks. wide, course SW.
- 26.00 Leave oak brush, bears NE. and SW.
- 28.00 Trail, bears NE. and SW.
- 37.10 Barbed wire fence, bears E. and W. about 1 chn. dist., thence N.
- 40.27 On gentle SW. slope, 200 ft. above sec. cor.

The $\frac{1}{4}$ sec. cor., which is a quartzite, 20x10x4 ins., marked with $\frac{1}{4}$ on W. face, firmly set in the ground and old mound of stone.

At point for cor.

Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground to solid rock, and in mound of stone to top, with original cor. stone deposited at base, for $\frac{1}{4}$ sec. cor., with brass cap marked.



Thence


N. 0° 16' E., between secs. 25 and 30.

- 22.00 Top of ascent, 330 ft. above $\frac{1}{4}$ sec. cor., slopes W.; descend gentle NW. slope.
- 31.50 Draw, 20 ft. below top of ascent, course SW.; ascend S. slope.
- 39.96 On S. slope, 160 ft. above draw.

The cor. of secs. 19, 24, 25, and 30, which is a quartzite, 30x10x10 ins., marked with 4 notches on N., and 2 notches on S. edge, firmly set and unwitnessed.

At point for cor.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, with original cor. stone deposited at base, for cor. of secs. 19, 24, 25, and 30, with brass cap marked



raise a mound of stone, 3 ft. base, 3 ft. high, W. of cor.

Land, rolling on S. portion and broken hills on N. portion. Soil, rocky and gravelly sandy clay loam; 2nd to 3rd rate. No timber.

Undergrowth, medium dense sagebrush. Oak on S. portion of mile. Medium growth of grass and weeds. Good grazing land.

DEPENDENT RESURVEY OF EAST BOUNDARY OF T. 7 N., R. 1 W.

Chains

1940

Reestablishment of surveys executed by Arthur F. Benson, Deputy Surveyor, in 1887.

N. 0° 11' E., between secs. 19 and 24.

Ascend steep S. slope, through medium dense undergrowth

13.00 Top of abrupt ascent; thence along steep W. slope.

22.80 Small draw, course SW.; ascend steep SE. slope.

40.62 Proportionate dist. On rocky point, 940 ft. above sec. cor., slopes SW.

No evidence of $\frac{1}{4}$ sec. cor. found.

Set an iron post, 3 ft. long, 1 in. diam., 15 ins. in the ground, to solid rock, and in mound of stone to top, with a quartzite, 10x8x6 ins., marked X, deposited at base, for $\frac{1}{4}$ sec. cor., with brass cap marked

S24	S19
-----	-----

1944

Thence along steep rocky W. slope.

65.00 Small draw, course SW.; ascend abrupt rocky S. slope.

81.24 Proportionate dist.; on steep rocky slope, 800 ft. above $\frac{1}{4}$ sec. cor.

No evidence of cor. of secs. 13, 18, 19, and 24, found.

Set an iron post, 3 ft. long, 2 ins. diam., 6 ins. in the ground to solid rock, and in mound of stone to top, with a limestone, 7x7x5 ins., marked X, deposited at base, for cor. of secs. 13, 18, 19, and 24, with brass cap marked

R1E	R2E
S13	S18

S24	S19
-----	-----

1944

Land, mountainous; steep rocky slopes
Soil, rocky sandy clay loam; 3rd to 4th rate.
No timber.
Undergrowth, sagebrush, oak, mahogany, and maple.
Medium growth of grass and weeds. Good grazing land.

N. 0° 11' E., between secs. 13 and 18.

Ascend steep rocky S. slope, through scattered timber, and medium dense undergrowth.

2.00 Rim of mountain, 175 ft. above sec. cor. on bearings E. and W.; continue over rolling top.


40.62 Proportionate dist.; no evidence of $\frac{1}{4}$ sec. cor. found.

Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground to solid rock, and in mound of stone to top, with a quartzite, 3x3x3 ins., marked X, deposited at base, for

DEPENDENT RESURVEY OF EAST BOUNDARY OF T. 7 N., R. 1 E.

Chains

1/4 sec. cor., with brass cap marked




1944

64.00 Flat topped ridge, bears E. and W.; descend along gentle N. slope.

81.24 Proportionate dist.; no evidence of cor. of secs. 7, 12, 13, and 18 found.

Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, with a limestone, 5x4x4 ins., marked X, deposited at base, for cor. of secs. 7, 12, 13, and 18, with brass cap marked



1944

Land, mountainous; rolling top of mountain. Soil, rocky mountain loam; 3rd rate. Timber, scattered aspen and fir. Undergrowth, sagebrush. Medium growth of grass and weeds. Good grazing land.

N. 0° 11' E., between secs. 7 and 12.


Descend over broken N. slope, through medium dense timber and dense undergrowth.

32.00 Stream of clear water, 5 lks. wide, 675 ft. below sec. cor., course S. 70° W.; ascend over S. slope.

40.62 Proportionate dist.; on S. slope, 165 ft. above draw.

No evidence of 1/4 sec. cor. found.

Set an iron post, 3 ft. long, 1 in. diam., 24 ins. in the ground to solid rock, and in mound of stone, with a limestone, 7x5x5 ins., marked X, deposited at base, for 1/4 sec. cor. with brass cap marked



1944

81.24 Proportionate dist.; on SW. slope, 610 ft. above 1/4 sec. cor.

No evidence of the cor. of secs. 1, 6, 7, and 12 found.

Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground, and in a mound of stone, for cor. of secs. 1, 6, 7, and 12, with brass cap marked

DEPENDENT RESURVEY OF EAST BOUNDARY OF T. 7 N., R. 1 E.

Chains

chains

beginning at T7N and R1E, sec. 1

R1E	R2E
S 1	S 6
S12	S 7

1944

from which

A Douglas fir, 11 ins. diam., bears S. 65° E., 86 lks. dist., marked T7NR2E57BT.

A balsam, 8 ins. diam., bears S. 6° W., 23 lks. dist., marked T7NR1E512BT.

A Douglas fir, 14 ins. diam., bears N. 64° W., 93 lks. dist., marked T7NR1E51BT.

Land, rough and broken mountain slopes.
Soil, rocky mountain loam; 3rd rate.
Timber, balsam, Douglas fir, and aspen.
Undergrowth, sagebrush, service berry, and choke cheery.
Medium growth of grass and weeds. Good grazing land.

N. 0° 11' E., between secs. 1 and 6.

Ascend over SW. slope, through medium dense timber and dense undergrowth.

10.00 Top of ascent on W. slope, 175 ft. above sec. cor.; descend over NW. slope.

31.00 Draw, 650 ft. below top of ascent, course N. 60° W.; ascend over SW. slope.

40.62 Proportinnate dist.; on SW. slope, 325 ft. above draw.

No evidence of 1/4 sec. cor. found.

Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground to solid rock, and in mound of stone to top, for 1/4 sec. cor., with brass cap marked

S 1	S 6
-----	-----

1944

from which

A Douglas fir, 14 ins. diam., bears S. 89° 45' W., 117 lks. dist., marked 1/2 S1BT.

63.50 Ridge, 295 ft. above 1/4 sec. cor., bears N. 70° W., and S. 70° E.; descend over NW. slope.

76.55 On a NW. slope, 435 ft. below ridge.

The cor. of Tps. 7 and 8 N., Rs. 1 and 2 E., which is a limestone, 14x8x6 ins., dimly marked with 6 notches on N., S., E., and W. edges, firmly set and unwitnessed.

At point for cor.

Set an iron post, 3 ft. long, 1 in. diam., 28 ins. in the ground, for cor. of Tps. 7 and 8 N., Rs. 1 and 2 E., with brass cap marked

DEPENDENT RESURVEY OF EAST BOUNDARY OF T. 7 N., R. 1 E.

Chains

T8N

R1E	R2E
S36	S31

S 1	S 6
-----	-----

T7N

1944

from which

A balsam, 3 ins. diam., bears N. 42° 45' E., 61 lks. dist., marked BT.

A balsam, 4 ins. diam., bears S. 6° 30' E., 78 lks. dist., marked BT.

A balsam, 4 ins. diam., bears S. 40° 45' W., 103 lks. dist., marked BT.

A balsam, 4 ins. diam., bears N. 28° W., 52 lks. dist., marked BT.

Land; rough and broken mountain slopes.
 Soil, gravelly and rocky mountain loam; 3rd rate.
 Timber, aspen, fir, and pine.
 Undergrowth, sagebrush, service berry, willows, and oak.
 Medium growth of weeds and grass. Good grazing land.

DEPENDENT RESURVEY OF SOUTH BOUNDARY OF T. 8 N., R. 2 E.

Reestablishment of surveys executed by James H. Martineau, Deputy Surveyor, in 1877, and resurveyed by Arthur F. Benson, Deputy Surveyor, in 1887.

From the cor. of Tps. 8 N., Rs. 2 and 3 E., which is a quartzite, 16x10x4 ins., marked with 6 notches on N., E., and W. edges, firmly set in the ground and in mound of stone.

At point for cor.

Set an iron post, 3 ft. long, 3 ins. diam., 27 ins. in the ground, with the original cor. stone deposited at base, for cor. of Tps. 8 N., Rs. 2 and 3 E., with brass cap marked

T8N

R2E	R3E
S36	S31

S6

T7NR3E

1941

raise a mound of

stone, 3 ft. base, 3 ft. high, N. of cor.

Thence

N. 89° 55' W., along S. bdy. of sec. 36.

Ascend along S. slope, through medium dense undergrowth.

1.70 Small draw, course S. 20° E.; ascend E. slope.

18.00 Ascend over NE. slope.

26.00 Top of ascent, 330 ft. above Tp. cor., slopes SE.; thence along S. slope.

DEPENDENT RESURVEY OF SOUTH BOUNDARY OF T. 8 N., R. 2 E.

Chains

amland

- 29.00 Enter aspen timber, bears NW. and SE.
- 33.00 Small draw, course SE.; ascend over E. slope.
- 40.79 Proportionate dist.; on E. slope, 550 ft. above Tp. cor.
No evidence of the $\frac{1}{4}$ sec. cor. found.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., sec. 36 only, with brass cap marked

$\frac{1}{4}$ S 36

1941

from which

An aspen, 5 ins. diam., bears N. 59° E., 29 lks. dist., marked $\frac{1}{4}$ S36BT.

An aspen, 6 ins. diam., bears N. 64° W., 21 lks. dist., marked $\frac{1}{4}$ S36BT.

- 54.00 Enter dense willows, bears N. and S.
- 59.00 Leave willows, and aspen timber, bears N. and S.
- 60.00 Spur, 300 ft. above $\frac{1}{4}$ sec. cor., projects S. 15° E.; descend over W. slope.
- 67.00 Enter medium dense aspen timber, bears N. and S.
- 79.00 Stream of clear water, 3 lks. wide, in canyon 460 ft. below spur, course S. 15° E.; ascend E. slope.
- 81.58 Proportionate dist.; on W. side of bottom of canyon.

No evidence of the cor. of secs. 35 and 36 found.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 35 and 36, with brass cap marked

T8N	R2E
S35	S36

S1

T7NR2E

1941

from which

An aspen, 4 ins. diam., bears N. 7° 30' E., 68 lks. dist., marked T8NR2ES36BT.

An aspen, 4 ins. diam., bears N. 65° W., 27 lks. dist., marked T8NR2ES35BT.

Land, mountainous; rolling to steep slopes.
Soil, rocky sandy clay loam; 2nd to 3rd rate.
Timber, aspen on portion of mile.
Undergrowth, sagebrush, mountain laurel, choke cherry, honeysuckle, and willows. Medium growth of grass and weeds. Good grazing land.

N. 89° 53' W., along S. bdy. of sec. 35.

Ascend over SE. slope, through medium dense undergrowth, and scattered timber.

DEPENDENT RESURVEY OF SOUTH BOUNDARY OF T. 8 N., R. 2 E.

Chains

- 13.00 Enter dense aspen timber, bears N. and S.
 16.20 Small draw, course S. 70° E., ascend E. slope.
 19.00 Enter scattered timber, bears N. and S..
 30.00 Ridge, 650 ft. above sec. cor., bears N. and S.; descend W. slope.
 38.00 Enter dense timber, bears N. and S.
 40.79 Proportionate dist.; on W. slope, 180 ft. below ridge.
 No evidence of the $\frac{1}{4}$ sec. cor. found.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., sec. 35 only, with brass cap marked

$\frac{1}{4}$ S35

1941

from which

An aspen, 6 ins. diam., bears N. 45° E., 10 lks. dist., marked $\frac{1}{4}$ S35BT.

A maple, 5 ins. diam., bears N. 13° W., 43 lks. dist., marked $\frac{1}{4}$ S35BT.

- 58.70 Small stream of clear water, in draw, course SW.; thence along S. slope.
 68.00 Leave aspen timber, bears N. and S..
 73.00 Descend SW. slope.
 81.58 On SW. slope, 580 ft. below $\frac{1}{4}$ sec. cor.,

The cor. of secs. 34 and 35, which is a quartzite, 24x12x10 ins., marked with 2 notches on E., and 4 notches on W. edge, firmly set in the ground and unwitnessed.

At point for cor. . . .

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, with original cor. stone deposited at base, for cor. of secs. 34 and 35, with brass cap marked

T8N	R2E
S34	S35

S2

T7NR2E

1941

raise a mound of stone, 3 ft. base, 3 ft. high, N. of cor.

Land, mountainous.

Soil, rocky sandy clay loam; 2nd to 3rd rate.

Timber; aspen on portions of mile.

Undergrowth, honeysuckle, choke cherry, mountain laurel, and sagebrush. Medium growth of grass and weeds.

Good grazing land.

N. 89° 26' W., along S. bdy. of sec. 34.

DEPENDENT RESURVEY OF SOUTH BOUNDARY OF T. 8 N., R. 2 E.

Chains	miles
	Descend over SW. slope, through scattered timber, and medium dense undergrowth.
4.40	Stream of clear water, 6 lks. wide, in canyon, 50 ft. below sec. cor., course S. 15° E.; ascend SE. slope.
5.60	Trail along canyon, bears N. 15° W., and S. 15° E.
9.00	Leave timber, bears N. and S.
24.00	Top of ascent, 400 ft. above canyon, slopes S.; descend SW. slope.
32.00	Draw, 60 ft. below top of ascent, course S. 60° E.; ascend NE. slope, entering scattered timber.
40.88	Proportionate dist.; on NE. slope, 170 ft. above draw. No evidence of the $\frac{1}{4}$ sec. cor. found. Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., sec. 34 only, with brass cap marked $\frac{1}{4}$ S34 1941 from which A balsam, 8 ins. diam., bears N. 15° 30' E., 279 lks. dist., marked $\frac{1}{4}$ S34BT. A balsam, 7 ins. diam., bears N. 6° 45' W., 224 lks. dist., marked $\frac{1}{4}$ S34BT.
55.00	Spur, 240 ft. above $\frac{1}{4}$ sec. cor., projects S. 75° E.; ascend along rolling SE. slope.
65.00	Ascend over E. slope.
74.00	Spur, 480 ft. above $\frac{1}{4}$ sec. cor., projects N. 75° E.; ascend over rolling NE. slope.
79.00	Ascend along rolling N. slope.
81.76	On rolling N. slope, 500 ft. above $\frac{1}{4}$ sec. cor. The cor. of secs. 33 and 34, which is a quartzite, 12x10x8 ins., marked with 3 notches on E. and W. edges, firmly set in the ground, from which A balsam, 36 ins. diam., bears S. 64° W., 99 lks. dist., blazed on face with scribe marks that are not legible. A balsam, 24 ins. diam., bears S. 72° 45' W., 98 lks. dist., marked 8NR2EBT. At point for cor. Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, with original cor. stone deposited at base, for cor. of secs. 33 and 34, with brass cap marked T8N R2E S33 S34 S3 T7NR2E 1941 from which

DEPENDENT RESURVEY OF SOUTH BOUNDARY OF T. 8 N., R. 2 E.

Chains

A balsam, 10 ins. diam., bears N. $28^{\circ} 30'$ E., 223 lks. dist., marked T8NR2ES34BT.

A balsam, 6 ins. diam., bears N. $62^{\circ} 45'$ W., 88 lks. dist., marked T8NR2ES33BT.

Land, mountainous; rolling slopes.

Soil, rocky sandy clay loam; 2nd rate.

Timber, scattered aspen, balsam, and Douglas fir.

Undergrowth, sagebrush, choke cherry, and honeysuckle.

Medium growth of grass and weeds. Good grazing land.

N. $89^{\circ} 27'$ W., along S. bdy. of sec. 33.

Ascend along gentle rolling N. slope, through medium dense aspen and scattered fir timber, and dense undergrowth.

29.00 Top of ascent, 170 ft. above sec. cor., slopes N.; descend over gentle rolling NW. slope.

36.30 Draw, 40 ft. below top of ascent, course N. 10° W.; ascend over rolling NE. slope.

40.89 On gentle NE. slope, 160 ft. above sec. cor.

The $\frac{1}{4}$ sec. cor., which is a quartzite, 15x12x10 ins., marked with $\frac{1}{4}$ on N. face, firmly set and unwitnessed.

At point for cor.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with the original cor. stone deposited at base, for $\frac{1}{4}$ sec. cor., sec. 33 only; with brass cap marked

$\frac{1}{4}$ S 33

1941

from which

A balsam, 8 ins. diam., bears N. $10^{\circ} 30'$ E., 136 lks. dist., marked $\frac{1}{4}$ S33BT.

An aspen, 6 ins. diam., bears N. $52^{\circ} 30'$ W., 38 lks. dist., marked $\frac{1}{4}$ S33BT.

Thence

N. $89^{\circ} 51'$ W., along S. bdy. of sec. 33.

4.10 Ascend gradually along rolling N. slope.

25.80 Trail, bears N. and S.

26.00 Top of ascent, 30 ft. above $\frac{1}{4}$ sec. cor.; slopes N.; descend over rolling NW. slope.

40.58 On NW. slope, 140 ft. below top of ascent.

The cor. of secs. 32 and 33, which is a quartzite, 16x14x12 ins., marked with 4 notches on E., and 2 notches on W. edge, firmly set in the ground, from which

A dead aspen, 10 ins. diam., bears S. $83^{\circ} 30'$ W., 26 lks. dist., scribe marks not legible.

At point for cor.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, with the original cor. stone deposited at base, for cor of secs. 32 and 33, with brass cap marked

DEPENDENT RESURVEY OF SOUTH BOUNDARY OF T. 8 N., R. 2 E.

Chains

2018

T8N R2E
S32 S33

S4

T7NR2E

1941

from which

A Douglas fir, 24 ins. diam., bears N. 77° E., 175 lks. dist., marked T8NR2ES33BT.

A balsam, 8 ins. diam., bears N. 78° 30' W., 168 lks. dist., marked T8NR2ES32BT.

Land, mountainous; gently rolling slopes.
Soil, rocky sandy clay loam; 2nd to 3rd rate.
Timber, aspen and scattered balsam and Douglas fir.
Undergrowth, sagebrush, honeysuckle, choke cherry, and young aspen. Medium growth of grass and weeds.
Good grazing land.

N. 89° 48' W., along S. bdy. of sec. 32.

Descend NW. slope, through medium dense timber, and medium dense undergrowth.

9.50 Leave timber, bears N. and S.

16.00 Draw, 240 ft. below sec. cor., course N.; ascend N. slope.

23.00 Enter medium dense timber, bears N. and S.

37.00 Ridge, 250 ft. above draw, bears N. 30° W. and S. 30° E. descend over rolling NW. slope.

40.83 On gentle NW. slope, 20 ft. below ridge.

The 1/4 sec. cor., which is a quartzite, 20x12x10 ins., marked with 1/4 on N. face, firmly set and unwitnessed.

At point for cor.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with the original cor. stone deposited at base, for 1/4 sec. cor., with brass cap marked.

1/4 S 32

1941

from which

A Douglas fir, 16 ins. diam., bears N. 75° E., 71 lks. dist., marked 1/4S32BT.

A balsam, 12 ins. diam., bears N. 12° 30' W., 310 lks. dist., marked 1/4S32BT.

Thence

N. 89° 26' W., along S. bdy. of sec. 32.

8.40 Draw, 180 ft. below ridge, course N. 20° W.; ascend over NE. slope.

14.20 Top of ascent, slopes N.; thence along a N. slope.

29.20 Spur, 40 ft. above draw, projects NW.; descend SW. slope.

40.65 On SW. slope, 230 ft. below spur.

The cor. of secs. 31 and 32, which is a quartzite, 24x20x10 ins.

DEPENDENT RESURVEY OF SOUTH BOUNDARY OF T. 8 N., R. 2 E.

Chains

18 ins., marked with 5 notches on E., and 1 notch on W. edge, firmly set in the ground, from which

A Douglas fir, 20 ins. diam., bears N. 21° W., 146 lks. dist.; scribe marks on tree not legible.

At point for cor.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, with original cor. stone deposited at base, for cor. of secs. 31 and 32, with brass cap marked

T8N	R2E
S31	S32

S5

T7NR2E

1941

from which

A Douglas fir, 20 ins. diam., bears N. 38° E., 174 lks. dist., marked T8NR2ES32BT.

A balsam, 16 ins. diam., bears N. 21° W., 83 lks. dist., marked T8NR2ES31BT.

Land, mountainous.; rolling slopes.

Soil, rocky sandy clay loam; 2nd to 3rd rate.

Timber, aspen, and scattered Douglas fir and balsam.

Undergrowth, honeysuckle, sagebrush, choke cherry, and young aspen. Medium growth of grass and weeds.

Good grazing land.

N. 89° 45' W., along S. bdy. of sec. 31.

Descend over SW. slope, through scattered timber, and dense undergrowth.

- 3.50 Draw; 85 ft. below sec. cor., course N.; ascend NE. slope.
- 10.90 Small spring in a grove of willows, flows NE.
- 16.90 Spur, 130 ft. above draw, projects N.; descend NW. slope.
- 31.40 Draw, 65 ft. below spur, course NE.; ascend SE. slope.
- 39.84 Proportionate dist.; on SE. slope, 250 ft. above draw.

No evidence of the $\frac{1}{4}$ sec. cor. found.

Set an iron post, 3 ft. long, 1 in. diam., 24 ins. in the ground to solid rock, and in a mound of stone, with a limestone, 7x5x3 ins., marked X, deposited at base, for $\frac{1}{4}$ sec. cor., sec. 31 only, with brass cap marked

$\frac{1}{4}$ S31

1944

- 59.50 Ridge, 235 ft. above $\frac{1}{4}$ sec. cor., bears N. and S.; descend over NW. slope.
- 73.50 Draw, 350 ft. below ridge, course N.; ascend NE. slope.
- 77.10 Spur, 95 ft. above draw, projects N.; descend NW. slope.
- 77.76 The cor. of Tps. 7 and 8 N., Rs. 1 and 2 E.

DEPENDENT RESURVEY OF SOUTH BOUNDARY OF T. 8 N., R. 2 E.

Chains

and 0

Land, mountainous; rough and broken slopes. Soil, gravelly and rocky mountain loam; 3rd rate. Timber, aspen, Douglas fir, and balsam. Undergrowth, sagebrush, choke cherry, service berry, oak, and willows. Medium growth of grass and weeds. Good grazing land.

DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 2 E.

Reestablishment of surveys executed by John T. Breckon, Deputy Surveyor, in 1893.

From the cor. of secs. 35 and 36, on S. bdy. of Tp. N. 0° 28' E., between secs. 35 and 36.

Descend steep NE. slope, through scattered fir timber, and medium dense undergrowth.

20.00 Point of spur, slopes N. 30° E.; descend steep NW. slope.

35.00 Enter scattered aspen timber.

40.65 Proportionate dist.; on rocky NW. slope, 820 ft. below sec. cor.

No evidence of the $\frac{1}{4}$ sec. cor. found.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked

S35 | S36

1941

from which

A balsam, 5 ins. diam., bears N. 89° E., 65 lks. dist., marked $\frac{1}{4}$ S36BT.

A Douglas fir, 18 ins. diam., bears N. 71° W., 62 lks. dist., marked $\frac{1}{4}$ S35BT.

43.60 Draw, course NE., about 2 chs. dist. to junction with canyon, draining easterly.

44.20 Canyon, 60 ft. below $\frac{1}{4}$ sec. cor., course E.; ascend steep rocky S. slope, leaving aspen and fir timber, and entering very scattered juniper.

56.60 Foot of broken quartzite outcroppings, bears E. and W.

65.50 Top of quartzite outcroppings, bears E. and W.

74.50 Rocky point of spur, sloping S. 15° W.; thence over rolling top of spur.

81.30 On spur, 850 ft. above canyon, projects SE.

The cor. of secs. 25, 26, 35, and 36, which is a sandstone, 32x9x4 ins., marked with 1 notch on E. and S. edges, firmly set in the ground and mound of stone.


At point for cor.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the

DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 2 E.

Chains

ground, with original con. stone deposited base, for cor. of secs. 25, 26, 35, and 36, with brass cap marked



1941 from which

A Douglas fir, 18 ins. diam., bears N. 12° E., 233 lks. dist., marked T7NR2ES25BT.

A juniper, 6 ins. diam., bears S. 51° 30' E., 37 lks. dist., marked T7NR2ES36BT.

An oak, 5 ins. diam., bears S. 49° 30' W., 71 lks. dist.; marked S35BT.

A Douglas fir, 4 ins. diam., bears N. 16° W., 266 lks. dist., marked T7NR2ES26BT.

Land, mountainous; steep rocky slopes. Soil, rocky sandy clay loam; 3rd to 4th rate. Timber, scattered Douglas fir, balsam, aspen, and a few juniper. Undergrowth, oak, honeysuckle, mountain laurel, and sagebrush. Medium growth of grass and weeds. Fair grazing land.

From the cor. of secs. 25 and 36, on E. bdy. of Tp. N. 88° 59' W., between secs. 25 and 36.

Ascend E. slope, through medium dense undergrowth.

12.00 Spur, 270 ft. above sec. cor., projects S. 15° E.; from N.; descend W. slope.

22.50 Small stream of clear water, in draw, 180 ft. below spur, course S. 20° E., ascend E. slope.


32.00 Spur, 100 ft. above draw, slopes S. 30° E.; descend SW. slope.

37.00 Small stream of clear water in draw, 30 ft. below spur, course SE.; ascend steep rocky NE. slope, entering scattered fir timber.

39.25 Proportionate dist.; on NE. slope, 50 ft. above draw.

No evidence of the 1/4 sec. cor. found.

Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground to solid rock, and in mound of stone to top, for 1/4 sec. cor., with brass cap marked



1941 from which

A Douglas fir, 28 ins. diam., bears S. 74° 30' E., 82 lks. dist., marked 1/4S36BT.

An oak, 8 ins. diam., bears N. 41° 30' W., 58 lks. dist., marked 1/4S25BT.

DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 2 E.

Chains

2012.10

65.00 Top of steep rocky NE. slope, 725 ft. above $\frac{1}{4}$ sec. cor.; thence ascend along steep rocky N. slope.

78.50 The cor. of secs. 25, 26, 35, and 36, 850 ft. above $\frac{1}{4}$ sec. cor.

Land, mountainous; steep rocky slopes on W. half mile. Soil, rocky sandy clay loam; 2nd to 4th rate. Timber, scattered Douglas fir and balsam on W. portion of mile. Undergrowth, oak, maple, sagebrush, and honeysuckle. Medium growth of grass and weeds. Good grazing land.

N. 0° 02' E., between secs. 25 and 26.

Descend along steep rocky E. to NE. slope, through scattered fir timber, and undergrowth of oak, mahogany, and sagebrush.

26.60 Draw, 250 ft. below sec. cor., course S. 60° E.; ascend abrupt SW. slope, leaving timber.

41.12 Proportionate dist.; on rocky SW. slope; 300 ft. above draw.

No evidence of the $\frac{1}{4}$ sec. cor. found.

Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground to solid rock, and in mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked

S26/S25

1941

from which

A mahogany, 10 ins. diam., bears east, 40 lks. dist., marked $\frac{1}{4}$ S25BT.

A mahogany, 10 ins. diam., bears N. 11° W., 42 lks. dist., marked $\frac{1}{4}$ S26BT.

53.00 Rim of mountain, 210 ft. above $\frac{1}{4}$ sec. cor.; bears NW. and SE.; thence over rolling top of mountain, leaving mahogany and entering scattered timber.

76.00 Enter scrub aspen timber, bears E. and W.

82.00 Leave aspen timber, bears E. and W.

82.24 On rolling top of mountain.

The cor. of secs. 23, 24, 25, and 26, which is a quartzite, 18x10x6 ins., marked with 1 notch on E., and 2 notches on S. edge, firmly set in the ground, and unwitnessed.

At point for cor.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, with original cor. stone deposited at base, for cor. of secs. 23, 24, 25, and 26, with brass cap marked

DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 2 E.

Chains

T7N R2E	S23	S24
	S26	S25

1941 from which.

A Douglas fir, 18 ins. diam., bears N. 83° E., 391 lks. dist., marked T7NR2ES24BT.

A Douglas fir, 12 ins. diam., bears S. 44° 30' W., 50 lks. dist., marked T7NR2ES26BT.

A Douglas fir, 12 ins. diam., bears N. 64° 30' W., 709 lks. dist., marked T7NR2ES23BT.

Raise a mound of stone, 3 ft. base, 3 ft. high, W. of cor.

Land, mountainous; steep rocky slopes on S. portion, and rolling on N. portion of mile. Soil, rocky sandy clay loam; 3rd rate. Timber, scattered Douglas fir on portion of mile. Undergrowth, mahogany, oak, and sagebrush. Medium growth of grass and weeds. Good grazing land.

From the cor. of secs. 24 and 25, on E. bdy. of Tp. N. 87° 51' W., between secs. 24 and 25.

Along S. slope, through medium dense aspen timber, and medium dense undergrowth.

- 4.00 Ridge, bears NE. and W.; thence along ridge.
- 8.00 Leave aspen timber, bears N. and S.
- 28.00 Leave ridge, bears E., and N. 70° W.; thence along S. slope.
- 33.00 Enter aspen timber, bears NW. and SE.
- 39.34 Proportionate dist.; on S. slope.

No evidence of the 1/4 sec. cor. found.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/4 sec. cor., with brass cap marked

1/4	S 24
	S 25

1941 from which.

A maple, 6 ins. diam., bears S. 51° 30' E., 20 lks. dist., marked 1/4S25BT.

An aspen, 6 ins. diam., bears N. 48° W., 30 lks. dist., marked 1/4S24BT.

Ascend over E. slope.

- 40.00 Leave aspen timber, and enter dense mountain laurel; bears N. and S.
- 47.00 Top of ascent, 100 ft. above 1/4 sec. cor., bears N. and S.; thence over rolling SE. slope on top of mountain.

DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 21 E.

Chains

and 0

- 49.00 Leave mountain laurel, entering aspen timber, bears N. and S.
 58.00 Leave aspen timber, bears N. and S.
 78.69 The cor. of secs. 23, 24, 25, and 26.

Land, mountainous; rolling slopes; 1st rate.
 Soil, rocky sandy clay loam; 2nd to 3rd rate.

Timber, aspen on portion of mile.

Undergrowth, honeysuckle, choke-cherry, maple, and sagebrush on mile; dense mountain laurel on portion of mile.

Medium growth of grass and weeds. Good grazing land.

N. 1° 35' W., between secs. 23 and 24.

Over-rolling top of mountain, through scattered aspen and fir timber, and scattered undergrowth.

- 8.00 Rim of mountain, bears E. and W.; descend over N. slope, leaving fir timber, and entering dense aspen, and dense undergrowth.
 12.50 From this point, a small spring in head of draw, and trough, bears E., 6.00 chs. dist.
 25.00 Enter scattered fir timber.
 32.50 Draw, 480 ft. below sec. cor., course N. 30° W.; thence descend along W. slope.
 38.69 Proportionate dist.; on W. slope, 530 ft. below sec. cor.
 No evidence of the $\frac{1}{4}$ sec. cor. found.
 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked
 $\frac{1}{4}$
 S23 | S24
 1941 from which
 A Douglas fir, 5 ins. diam., bears S. 40° E., 66 lks. dist., marked S21PT.
 A Douglas fir, 6 ins. diam., bears S. 68° W., 24 lks. dist., marked S25PT.
 42.00 Descend over N. slope.
 53.00 Leave timber, bears E. and W.
 57.00 Draw, 200 ft. below $\frac{1}{4}$ sec. cor., course S. 60° W.; thence along a W. slope.
 60.40 Draw, course S. 30° W.; ascend over rolling SE. slope.
 63.50 Trail, bears S. 30° W., and N. 30° E.
 77.39 On rolling SE. slope, 230 ft. above draw.

The cor. of secs. 13, 14, 23, and 24, which is a quartzite, 14x24 ins., marked with 1 notch on E. and 3 notches on S. edge, firmly set in the ground and bound of stone.

DEPENDENT RESURVEY OR SUBDIVISION OF T. 7. N., R. 2. E.

Chains

At point for cor. of sec. 13 and 24, on E. bdy. of Tp.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, with original cor. stone deposited at base, for cor. of secs. 13, 14, 23, and 24, with brass cap marked

T7N	R2E
S14	S13
S23	S24

1941

raise a mound of stone, 3 ft. base, 3 ft. high, W. of cor.

Land, mountainous; steep and rolling slopes. Soil, rocky sandy clay loam; 2nd to 3rd rate. Timber, aspen, and scattered Douglas fir and balsam on portion of mile. Undergrowth, honeysuckle, maple, choke cherry, sagebrush, and oak. Medium growth of grass and weeds. Good grazing land.

From cor. of secs. 13 and 24, on E. bdy. of Tp.

S. 88° 36' W., between secs. 13 and 24.

Ascend NE. slope, through medium dense aspen and fir timber, and dense undergrowth of honeysuckle.

5.00 Ascend gradually along N. slope.

18.70 Draw, 160 ft. above sec. cor., course NE.; ascend E. slope.

41.92 On E. slope, 400 ft. above sec. cor.

The 1/4 sec. cor., which is a quartzite, 12x8x4 ins., marked with 1/4 on N. face, firmly set in the ground and unwitnessed.

At point for cor.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with original cor. stone deposited at base, for 1/4 sec. cor., with brass cap marked

S 13
S 24

1941

from which

An aspen, 4 ins. diam., bears S. 16° 30' W., 53 lks. dist., marked 1/4 S24BT.

An aspen, 6 ins. diam., bears N. 38° W., 40 lks. dist., marked 1/4 S13BT.

Thence

N. 89° 43' W., between secs. 13 and 24,

5.00 Ridge, 40 ft. above 1/4 sec. cor., bears N. and S.; trail along ridge; descend W. slope, leaving aspen timber, and enter dense mountain laurel undergrowth.

16.10 Trail, bears N. and SW.

DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 25 E.

Chains	
20.00	Descend over rolling SW. slope.
25.00	Leave mountain laurel and enter dense sagebrush, choke cherry, and oak undergrowth, bears N. and S.
33.10	Trail bears N. and S.
35.10	Draw, 430 ft. below ridge, course S.; ascend SE. slope.
39.53	The cor. of secs. 13, 14, 23, and 24, 60 ft. above draw.
	<p>Land, mountainous; rolling slopes. Soil, rocky sandy clay loam; 2nd to 3rd rate. Timber, aspen, Douglas fir, and balsam on portion of mile. Undergrowth, honeysuckle, mountain laurel, sagebrush, oak and choke cherry. Medium growth of grass and weeds. Good grazing land.</p>
	<p>N. 1° 58' E., between secs. 13 and 14.</p>
	<p>Ascend over gentle SE. slope, through medium dense sagebrush undergrowth.</p>
3.00	Top of ascent, slopes E.; thence along E. slope.
9.40	Draw, course S. 30° E.; ascend over S. slope, entering dense undergrowth of oak, mountain laurel, choke cherry, and maple.
24.00	Spur, 290 ft. above sec. cor., projects S. 70° W.; descend
30.70	Draw, 60 ft. below spur, course W.; ascend, entering scattered mahogany.
35.00	Spur, 30 ft. above draw, projects NW.; about 5 chs. to low pass; descend NE. slope, entering scattered fir timber
40.22	Proportionate dist.; on NE. slope, 100 ft. below spur.
	<p>No evidence of $\frac{1}{4}$ sec. cor. found.</p>
	<p>Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked.</p>
	<p style="text-align: center;">S14 S13 1941 from which</p>
	<p>A Douglas fir, 12 ins. diam., bears S. 84° E., 362 lks. dist., marked $\frac{1}{4}$S13BT.</p>
	<p>A mahogany, 8 ins. diam., bears N. 40° W., 160 lks. dist., marked $\frac{1}{4}$S14BT.</p>
41.00	Draw, 15 ft. below $\frac{1}{4}$ sec. cor., course NE.; ascend SE. slope.
45.00	Top of ascent, 30 ft. above draw, slopes E.; thence along steep E. slope, entering dense mountain laurel undergrowth leaving mahogany.
75.00	Descend over steep NE. slope.
80.44	Proportionate dist.; on abrupt NE. slope, 570 ft. below $\frac{1}{4}$ sec. cor.

DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 2 E.

Chains

No evidence of cor. of secs. 11, 12, 13, and 14 found.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 11, 12, 13, and 14, with brass cap marked

T7N	R2E
S11	S12
S14	S13

1941

from which

A Douglas fir, 7 ins. diam., bears N. 60° E., 135 lks. dist., marked T7NR2ES12BT.

A Douglas fir, 6 ins. diam., bears S. 55° E., 310 lks. dist., marked T7NR2ES13BT.

A Douglas fir, 9 ins. diam., bears S. 86° W., 106 lks. dist., marked T7NR2ES14BT.

A Douglas fir, 8 ins. diam., bears N. 66° W., 74 lks. dist., marked T7NR2ES11BT.

Land, mountainous; steep slopes on N. half mile. Soil, rocky sandy clay loam; 2nd to 3rd rate. Timber, scattered Douglas fir. Undergrowth, mountain laurel, oak, sagebrush, mahogany, maple, and honeysuckle. Medium growth of grass and weeds. Good grazing land.

From the cor. of secs. 12 and 13, on E. bdy. of Tp.

S. 88° 54' W., between secs. 12 and 13.

Ascend E. slope, through medium dense aspen timber, and undergrowth of choke cherry and honeysuckle.

7.50 Spur, 50 ft. above sec. cor., projects N.; descend over W. slope.

14.00 Enter scattered aspen and willows, bears NE. and SW.; descend over NW. slope.

21.00 Leave willows, bears NE. and SW.

32.00 Descend abrupt W. slope, entering scattered fir timber.

38.90 Draw, 570 ft. below spur, course NW.; ascend NE. slope.

39.57 Proportionate dist.; on W. side of bottom of draw.

No evidence of the 1/2 sec. cor. found.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/2 sec. cor., with brass cap marked

S 12
S 13

1941

from which

A Douglas fir, 8 ins. diam., bears N. 8° E., 132 lks. dist., marked S12BT.

DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 2 E.

Chains

211371

- A Douglas fir, 12 ins. diam., bears S. 35° E., 120 lks. dist., marked $\frac{1}{4}$ S13BT.
- 42.00 Spur, 50 ft. above draw, slopes NW.; descend NW. slope, entering mountain laurel, honeysuckle, and sagebrush.
- 52.50 Draw, course N. 70° W.; thence along N. slope.
- 53.90 Trail, bears N. 70° W., and S. 70° E.
- 59.00 Draw, 210 ft. below spur, course N.; ascend E. slope.
- 62.30 Spur, 90 ft. above draw, slopes N.; descend along a steep N. slope.
- 71.00 Descend abrupt NW. slope.
- 73.00 Draw, 210 ft. below spur, course N.; ascend steep NE. slope.
- 79.13 The cor. of secs. 11, 12, 13, and 14, 140 ft. above draw.
- Land, mountainous; rolling to abrupt slopes.
Soil, rocky sandy clay loam; 2nd to 3rd rate.
Timber, aspen and scattered Douglas fir.
Undergrowth, honeysuckle, mountain laurel, choke cherry, willows, and sagebrush. Medium growth of grass and weeds.
Good grazing land:
-
- N. 0° 39' W., between secs. 11 and 12.
- Descend steep rocky NE. slope, through scattered fir timber, and medium dense undergrowth of mountain laurel, oak, and sagebrush.
- 6.20 Middle Fork of Ogden River, stream of clear water, 20 lks. wide, in canyon 350 ft. below sec. cor.; course W.; ascend steep rocky S. slope, entering medium dense mahogany; leave mountain laurel and oak.
- 30.00 Spur, 950 ft. above canyon, projects W.; descend N. slope, leaving mahogany; enter fir and aspen timber, and undergrowth of honeysuckle and mountain laurel.
- 40.20 Proportionate dist.; on N. slope, 270 ft. below spur.
- No evidence of the $\frac{1}{4}$ sec. cor. found.
- Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked
- $\frac{1}{4}$
- S11 | S12
- 1941
- from which
- A Douglas fir, 32 ins. diam., bears N. 69° 30' E., 194 lks. dist., marked $\frac{1}{4}$ S12BT.
- A Douglas fir, 36 ins. diam., bears S. 64° W., 92 lks. dist., marked $\frac{1}{4}$ S11BT.
- 45.00 Draw, 50 ft. below $\frac{1}{4}$ sec. cor., course S. 80° W.; ascend SW. slope, leaving timber and entering undergrowth of mahogany, honeysuckle, maple, and sagebrush.

DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 2 E.

Chains

80.39 The cor. of secs. 1, 2, 11, and 12, which is a quartzite, 16x12x10 ins., marked with 1 notch on E., and 5 notches on S. edge, firmly set in the ground and unwitnessed.

At point for cor.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, with original cor. stone deposited at base, for cor. of secs. 1, 2, 11, and 12, with brass cap marked

T7N	R2E
S 2	S 1
S11	S12

1941

raise a mound of stone, 3 ft. base, 3 ft. high, W. of cor.

Land, mountainous.

Soil, rocky sandy clay loam; 2nd to 3rd rate.

Timber, Douglas fir, balsam, and aspen on portions of mile.

Undergrowth, mountain laurel, oak, mahogany, sagebrush, and honeysuckle. Medium growth of grass and weeds.

Good grazing land.

From the cor. of secs. 1 and 12, on E. bdy. of Tp.

S. 89° 09' W., between secs. 1 and 12.

Descend over rolling NW. slope, through scattered fir and aspen timber, and medium dense undergrowth.

6.00 Leave fir timber, bears N. and S.

21.60 Middle Fork of Ogden River, stream of clear water, 10 lks. wide, in canyon, 370 ft. below sec. cor., course S.15° W.; ascend E. slope, leaving timber.

24.60 Trail, bears N. and S.

36.00 Top of ascent, slopes SE.; thence along S. slope.

41.16 On S. slope, 330 ft. above canyon.

The 1/4 sec. cor., which is a quartzite, 14x12x8 ins., marked with 1/4 on N. face, firmly set in the ground, and unwitnessed.

At point for cor.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with original cor. stone deposited at base, for 1/4 sec. cor., with brass cap marked

S 1
S 12

1941

from which

A juniper 12, ins. diam., bears S. 50° 30' E., 348 lks. dist., marked S12BT.

Raise a mound of stone, 3 ft. base, 3 ft. high, N. of cor.

DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 2 E.

Chains

- Thence
- S. 87° 32' W., between secs. 1 and 12.
- 4.00 Draw, course SE.; ascend NE. slope.
- 12.50 Spur, 120 ft. above draw, slopes S. 60° E.; descend over SW. slope.
- 22.00 Draw, 50 ft. below spur, course S. 50° E.; ascend NE. slope.
- 36.00 Ridge, 270 ft. above draw, bears N. and S.; descend over W. slope.
- 39.59 The cor. of secs. 1, 2, 11, and 12, 40 ft. below ridge.


Land, mountainous; rolling slopes.
 Soil, rocky sandy clay loam; 2nd to 3rd rate.
 Timber, aspen and Douglas fir on portion of mile.
 Undergrowth, mountain laurel, sagebrush, maple, and service berry. Medium growth of grass and weeds.
 Good grazing land.

N. 0° 54' E., between secs. 1 and 2.

- Ascend gradually along rolling SW. slope, through scattered mahogany, and medium dense sagebrush and honeysuckle.
- 23.00 Ridge, 230 ft. above sec. cor., bears S. 10° E., from NW.; descend NE. slope, leaving mahogany, and entering scattered fir and aspen timber, and undergrowth of maple, choke cherry, and mountain laurel.
- 42.40 Draw, 250 ft. below ridge, course N. 80° E.; ascend over SE. slope.
- 42.73 The $\frac{1}{4}$ sec. cor., which is a quartzite, .16x12x8 ins., marked with $\frac{1}{4}$ on W. face, firmly set and unwitnessed.

At point for cor.

Set an iron post, 3 ft. long, 1 in. diam., 24 ins. in the ground to solid rock, and in mound of stone to top, with original cor. stone deposited at base, for $\frac{1}{4}$ sec. cor., with brass cap marked



from which

A balsam, 10 ins. diam., bears S. 65° E., 190 lks. dist., marked $\frac{1}{4}$ S1BT.

An aspen, 5 ins. diam., bears S. 12° 45' W., 80 lks. dist., marked $\frac{1}{4}$ S2BT.

Thence

- N. 0° 44' E., between secs. 1 and 2.
- 7.00 Top of ascent, 140 ft. above draw, slopes E.; thence along E. slope.

DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 2 E.

Chains

37.49 At proportionate dist. along S. bdy. of T. 8 N., R. 2 E.

No evidence of the closing cor. of secs. 1 and 2 found.

Set an iron post, 3 ft. long, 2 in. diam., 27 ins. in the ground, for closing cor. of secs. 1 and 2, with brass cap marked

T8NR2E	
S35	
S 2	S 1
T7N	R2E
CC	

1941

from which

An aspen, 4 ins. diam., bears S. $10^{\circ} 30'$ E., 63 lks. dist., marked T7NR2ES1CCBT.

An aspen, 4 ins. diam., bears S. $41^{\circ} 30'$ W., 62 lks. dist., marked T7NR2ES2CCBT.

From this closing cor., the cor. of secs. 35 and 36, bears S. $89^{\circ} 53'$ E., 9.57 chs. dist.

At mid point on N. bdy. of sec. 1.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{2}$ sec. cor., sec. 1 only, with brass cap marked

$\frac{1}{2}$ S 1

1941

from which

An aspen, 6 ins. diam., bears S. 76° E., 50 lks. dist., marked $\frac{1}{2}$ S1BT.

An aspen, 7 ins. diam., bears S. 49° W., 23 lks. dist., marked $\frac{1}{2}$ S1BT.

From this $\frac{1}{2}$ sec. cor., the $\frac{1}{2}$ sec. cor. of sec. 36, bears S. $89^{\circ} 53'$ E., 10.43 chs. dist.

Land, mountainous.

Soil, rocky sandy clay loam; 2nd to 3rd rate.

Timber, Douglas fir and aspen on portion of mile.

Undergrowth, mountain laurel, sagebrush, honeysuckle, and choke cherry. Medium growth of weeds and grass.

Good grazing land.

From the cor. of secs. 34 and 35 on S. bdy. of Tp.

N. $0^{\circ} 42'$ W., between secs. 34 and 35.

Over rolling top of mountain, through medium dense undergrowth; ascend over gentle SW. slope.

8.00 Top of ascent, 25 ft. above sec. cor.; descend over gentle N. slope.

40.27 On gentle N. slope, 110 ft. below sec. cor.

The $\frac{1}{2}$ sec. cor., which is a quartzite, 16x10x4 ins., marked with $\frac{1}{2}$ on W. face, firmly set in the ground and mound of stone.

DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 2 E.

Chains

At point for cor.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with original cor. stone deposited at base, for $\frac{1}{4}$ sec. cor., with brass cap marked



1941

from which

A juniper, 10 ins. diam., bears N. 6° E., 678 lks. dist., marked $\frac{1}{4}$ S35BT.

A juniper, 12 ins. diam., bears N. 27° 15' W., 644 lks. dist., marked $\frac{1}{4}$ S34BT.

Thence

N. 1° 00' E., between secs. 34 and 35.


27.70 Draw, 60 ft. below $\frac{1}{4}$ sec. cor., course E.

40.35 On rolling top of mountain.

The cor. of secs. 26, 27, 34, and 35, which is a quartzite 14x8x6 ins., marked with 2 notches on E., and 1 notch on S. edge, firmly set and witnessed by a mound of stone, 3 ft. base, 2 ft. high, to the W.

At point for cor.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, with original cor. stone deposited at base, for cor. of secs. 26, 27, 34, and 35, with brass cap marked



1941

Land, mountainous; rolling top of mountain. Soil, rocky sandy clay loam; 2nd to 3rd rate. Timber, a few scattered juniper. Undergrowth, sagebrush. Medium growth of grass and weeds. Good grazing land.

From the cor. of secs. 25, 26, 35, and 36.

S. 89° 56' W., between secs. 26 and 35.

Descend SW. slope, through very scattered timber, and medium dense undergrowth.

27.00 Draw, 480 ft. below sec. cor., course S. 30° E.; ascend over steep E. slope.

40.24 Proportionate dist.; on E. slope, 400 ft. above draw.

No evidence of the $\frac{1}{4}$ sec. cor. found.

Set an iron post, 3 ft. long, 1 in. diam., 6 ins. in the ground to solid rock, and in mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked.

DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 2 E.

Chains

$\frac{1}{4}$ $\frac{S\ 26}{S\ 35}$

1941

from which

A Douglas fir, 12 ins. diam., bears N. 64° E., 171 lks. dist., marked $\frac{1}{4}$ S26BT.

A juniper, 18 ins. diam., bears S. 50° E., 289 lks. dist., marked $\frac{1}{4}$ S35BT.

47.00 Rim of mountain, 190 ft. above $\frac{1}{4}$ sec. cor., bears N. and S.; thence over rolling top of mountain.

80.48 The cor. of secs. 26, 27, 34, and 35,

Land, mountainous;
Soil, rocky sandy clay loam; 2nd to 3rd rate.
Timber, very scattered juniper and Douglas fir.
Undergrowth, sagebrush and scattered mahogany. Medium growth of grass and weeds. Good grazing land.

N. 1° 01' W., between secs. 26 and 27.

Descend gentle N. slope over rolling top of mountain, through scattered timber, and medium dense undergrowth.

12.00 Rim of mountain, bears N. 60° E. and W.; descend over rocky N. slope.

21.20 Draw, 350 ft. below sec. cor., course NW.; thence along rocky W. slope broken by quartzite outcroppings.

40.66 Proportionate dist.; on rocky W. slope.

No evidence of the $\frac{1}{4}$ sec. cor. found.

Set an iron post, 3 ft. long, 1 in. diam., 6 ins. in the ground to solid rock, and in mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$
S27 | S26

1941

from which

A juniper, 10 ins. diam., bears N. 5° W., 115 lks. dist., marked $\frac{1}{4}$ S27BT.

55.00 Rocky point of spur, 140 ft. above $\frac{1}{4}$ sec. cor., breaks off to the N., from S. 15° E.; descend over abrupt rocky N. slope.

81.33 On N. slope, 620 ft. below point of spur.

The cor. of secs. 22, 23, 26, and 27, which is a quartzite, 18x10x8 ins., marked with 2 notches on E. and S. edges, firmly set in the ground and in mound of stone.

At point for cor.

Set an iron post, 3 ft. long, 2 ins. diam., 18 ins. in the ground to solid rock, and in mound of stone to top, with original cor. stone deposited at base, for cor. of secs. 22, 23, 26, and 27, with brass cap marked

DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 2 E.

Chains

201610

T7N	R2E
S22	S23
S27	S26

1941

Land, mountainous; steep rocky slopes.
 Soil, rocky sandy clay loam; 3rd to 4th rate.
 Timber, very scattered Douglas fir and juniper.
 Undergrowth, sagebrush, mountain laurel, and scattered mahogany, maple and oak. Medium growth of grass and weed.
 Fair grazing land.

From the cor. of secs. 23, 24, 25, and 26.

S. 89° 22' W., between secs. 23 and 26.

Ascend gentle E. slope, over rolling top of mountain, through scattered timber, and undergrowth of sagebrush and scattered mahogany.

22.00 Rim of mountain, bears N. and S.; descend rocky W. slope.

32.00 Top of sandstone ledge, 75 ft. high, bears N. and S.

35.20 Head of draw, 310 ft. below rim of mountain, course N. 65° W.; continue descent along rocky NW. slope.

41.01 Proportionate dist.; on rocky NW. slope, 410 ft. below rim of mountain.

No evidence of the $\frac{1}{4}$ sec. cor. found.

Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground to solid rock, and in mound of stone to top, with a quartzite, 10x8x8 ins., marked X, deposited at base, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$	S 23
	S 26

1941

45.00 Rocky point; descend abrupt W. to NW. slope, entering medium dense oak, honeysuckle, and sagebrush.

69.00 Draw, 750 ft. below $\frac{1}{4}$ sec. cor., course N. 15° W.; ascend over NE. slope.

76.00 Top of ascent, 140 ft. above draw, slopes N.; thence along a N. slope.

82.02 The cor. of secs. 22, 23, 26, and 27.

Land, mountainous; steep rocky slopes.
 Soil, rocky sandy clay loam; 3rd rate.
 Timber, very scattered juniper and Douglas fir.
 Undergrowth, sagebrush, oak, honeysuckle, and scattered mahogany. Medium growth of grass and weeds.
 Fair grazing land.

N. 1° 01' E., between secs. 22 and 23.

DEPENDENT RESURVEY OF SUBDIVISION OF T. 7-N., R. 2-E.

Chains

Descend over N. slope, through dense undergrowth.
 22.00 Draw, 450 ft. below sec. cor., course NW.; ascend.
 28.00 Low spur, 30 ft. above draw, projects W.; descend.
 32.50 Canyon, 70 ft. below spur; course W.; trail along canyon;
 ascend S. slope.
 36.00 Point of spur, 30 ft. above canyon, slopes SW.; descend
 over NW. slope.
 39.60 Proportionate dist.; on NW. slope 30 ft. below spur.
 No evidence of the $\frac{1}{4}$ sec. cor. found.
 Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the
 ground, for $\frac{1}{4}$ sec. cor., with brass cap marked



from which


A maple, 7 ins. diam., bears N. 67° 15' E., 115 lks.
 dist., marked $\frac{1}{4}$ S23BT.
 A maple, 4 ins. diam., bears S. 57° W., 42 lks. dist.,
 marked $\frac{1}{4}$ S22BT.

57.00 Middle Fork of Ogden River, stream of clear water, 30 lks.
 wide, in canyon, 200 ft. below $\frac{1}{4}$ sec. cor., course SW.;
 ascend over SE. slope.

58.00 Trail, along canyon, bears NE. and SW.

79.20 Proportionate dist.; on SE. slope, 380 ft. above canyon.
 No evidence of cor. of secs. 14, 15, 22, and 23 found.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the
 ground, for cor. of secs. 14, 15, 22, and 23, with brass
 cap marked



raise a mound of
 stone, 3 ft. base, 3 ft. high, W. of cor.

Land, mountainous.
 Soil, rocky sandy clay loam; 2nd to 3rd. rate.
 No timber.
 Undergrowth, dense oak, maple, choke cherry, sagebrush,
 and mountain laurel. Medium growth of grass and weeds.
 Good grazing land.

From the cor. of secs. 13, 14, 23, and 24.
 N. 89° 17' W., between secs. 14 and 23.
 Ascend over SE. slope, through medium dense undergrowth.

DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 2 E.

Chains

- 9.00 Spur, 150 ft. above sec. cor., projects S. 15° W.; descend steep W. slope.
- 21.50 Draw, 450 ft. below spur, course SW.; ascend SE. slope.
- 26.00 Top of ascent, 40 ft. above draw, slopes S.; descend SW. slope.
- 39.19 Proportionate dist.; on SW. slope near bottom of draw, 300 ft. below top of ascent.
- No evidence of the $\frac{1}{4}$ sec. cor. found.
- Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked
- $\frac{1}{4}$ $\frac{S\ 14}{S\ 23}$
- 1941 from which
- A Douglas fir, 36 ins. diam., bears S. 32° 30' E., 153 lks. dist., marked $\frac{1}{4}$ S23ET.
- Raise a mound of stone, 3 ft. base, 3 ft. high, N. of cor.
- 40.50 Draw, 20 ft. below $\frac{1}{4}$ sec. cor., course N. 70° W.; ascend along steep N. slope, entering medium dense timber.
- 47.00 Rocky point, slopes NW.; descend abrupt W. slope, leaving timber.
- 54.00 Middle Fork of Ogden River, stream of clear water, 30 lks. wide, in canyon 350 ft. below $\frac{1}{4}$ sec. cor., course SW.; ascend E. slope.
- 55.00 Trail along canyon, bears NE. and SW.
- 58.00 Top of abrupt ascent, 90 ft. above canyon; ascend over rolling SE. slope.
- 78.39 The cor. of secs. 14, 15, 22, and 23, 250 ft. above canyon.
- Land, mountainous.
Soil, rocky sandy clay loam; 2nd to 3rd rate.
Timber, Douglas fir and aspen on portion of mile.
Undergrowth, medium dense oak, sagebrush, maple, choke cherry, and mountain laurel. Medium growth of grass and weeds. Good grazing land.
-
- N. 1° 31' E., between secs. 14 and 15.
- Ascend over rolling SE. slope, through dense undergrowth.
- 8.00 Spur, 130 ft. above sec. cor., projects S. 70° E.; descend over N. slope.
- 15.60 Draw, 70 ft. below spur, course S. 80° E.; ascend over S. slope.
- 23.00 Top of ascent, 70 ft. above draw; ascend gradually along E. slope.
- 38.00 Small draw, course S. 60° E.; ascend S. slope.

DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 2 E.

Chains

39.61 Proportionate dist.; on S. slope 30 ft. above draw..

No evidence of the $\frac{1}{4}$ sec. cor. found..

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked

S15	S14
-----	-----

1941

raise a mound of stone, 3 ft. base, 3 ft. high, W. of cor.

43.00 Spur, 50 ft. above $\frac{1}{4}$ sec. cor., slopes S. 60° E.; descend.

48.00 Small draw, 100 ft. below spur, course S. 60° E.; ascend over S. slope.

64.00 Spur, 450 ft. above draw, projects S. 80° E.; descend NE. slope, entering medium dense timber.

79.22 Proportionate dist.; on NE. slope, 320 ft. below spur.

No evidence of cor. of secs. 10, 11, 14 and 15 found.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 10, 11, 14, and 15, with brass cap marked.

T7N	R2E
S10	S11
S15	S14

1941

from which

A Douglas fir, 6 ins. diam., bears N. 43° E., 12 lks. dist., marked T7NR2ES11BT.

A Douglas fir, 7 ins. diam., bears S. 25° 30' E., 67 lks. dist., marked T7NR2ES14BT.

A Douglas fir, 5 ins. diam., bears S. 75° 30' W., 65 lks. dist., marked T7NR2ES15BT.

A Douglas fir, 21 ins. diam., bears N. 8° W., 38 lks. dist., marked T7NR2ES10BT.

Land, mountainous.

Soil, rocky sandy clay loam; 2nd to 3rd rate.

Timber, aspen and Douglas fir on portion of N. half mile.

Undergrowth, sagebrush, mountain laurel, oak, maple, and honeysuckle. Medium growth of grass and weeds.

Good grazing land.

From the cor. of secs. 11, 12, 13, and 14.

S. 89° 44' W., between secs. 11 and 14.

Along steep rocky N. slope, through scattered timber, and dense undergrowth.

8.00 Descend over rocky NW. slope.

DEPARTMENT OF SURVEY OF SUBDIVISION OF T. 7 N., R. 3 E.

Chains

anbaro

- 34.00 Middle Fork of Ogden River, stream of clear water, 200 ft. wide, in canyon 460 ft. below sec. cor., course S. 70° E. ascend SE. slope.
- 39.52 Proportionate dist.; on point of spur, 120 ft. above canyon, slopes S.
No evidence of the $\frac{1}{2}$ sec. cor. found.
Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{2}$ sec. cor., with brass cap marked

$$\frac{S 11}{S 14}$$

1941

- 45.00 Stream of clear water, 10 lks. wide, in canyon, 90 ft. below $\frac{1}{2}$ sec. cor., course S.; ascend E. slope.
- 47.00 Spur, 340 ft. above canyon, projects SE.; descend along S. to SW. slope.
- 74.00 Stream of clear water, 6 lks. wide, in canyon, 90 ft. below spur, course S. 60° E.; ascend NE. slope.
- 77.04 The cor. of secs. 10, 11, 14, and 15, 200 ft. above canyon

Land, mountainous; steep rocky slopes.
Soil, rocky sandy clay loam; 2nd to 3rd rate.
Timber, scattered aspen and Douglas fir.
Undergrowth, sagebrush, mountain laurel, mahogany, oak, choke cherry, and maple. Medium growth of grass and weeds.
Good grazing land,

N. 0° 23' W., between secs. 10 and 11.

- Descend NE. slope, through scattered timber, and dense undergrowth.
- 1.00 Leave timber, bears E. and W.
- 4.50 Canyon, 100 ft. below sec. cor., course S. 60° E.; ascend over S. slope. A small stream of clear water in bottom.
- 14.00 Spur, 300 ft. above canyon, projects S. 60° E.; descend NE. slope.
- 24.00 Shall draw, 90 ft. below spur, course S. 60° E.; ascend S. slope.
- 42.00 Top of ascent, 150 ft. above draw, slopes E.; thence along E. slope.
- 47.00 Proportionate dist.; on E. slope.
No evidence of the $\frac{1}{2}$ sec. cor. found.
Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{2}$ sec. cor., with brass cap marked

DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 2 E.

Chains

S10	S11
-----	-----

1941

raise a mound of

stone, 3 ft. base, 3 ft. high, W. of cor.

53.50 Draw, 40 ft. below $\frac{1}{4}$ sec. cor., course SE.; ascend SW. slope.

68.00 Spur, 310 ft. above draw, projects S. 70° E.; descend NE. slope.

74.60 Head of draw, 20 ft. below spur, course S. 70° E.; ascend SE. slope.

79.19 The cor. of secs. 2, 3, 10, and 11, which is a sandstone, 16x10x10 ins., marked with 2 notches on E., and 5 notches on S. edge, firmly set in the ground and unwitnessed.

At point for cor.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, with original cor. stone deposited at base, for cor. of secs. 2, 3, 10, and 11, with brass cap marked

T7N	R2E
S 3	S 2
S10	S11

1941

raise a mound of

stone, 3 ft. base, 3 ft. high, W. of cor.

Land, mountainous.

Soil, rocky sandy clay loam; 2nd to 3rd rate.

Timber, scattered Douglas fir on portion of mile.

Undergrowth, sagebrush, mountain laurel, oak, maple, and choke cherry. Medium growth of grass and weeds.

Good grazing land.

From the cor. of secs. 1, 2, 11, and 12.

S. 89° 03' W., between secs. 2 and 11.

Descend SW. slope, through medium dense sagebrush.

18.80 Draw, 270 ft. below sec. cor., course S.; ascend SE. slope.

30.00 Spur, 160 ft. above draw, projects S.; descend NW. slope, entering dense undergrowth of choke cherry, mountain laurel, maple, willows, and scattered timber.

39.28 Proportionate dist.; on NW. slope, 120 ft. below spur.

No evidence of the $\frac{1}{4}$ sec. cor. found.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked

S 2
S 11

1941

from which


DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 2 E.

Chains	Station
	A balsam, 6 ins. diam., bears S. 52° W., 96 lks. dist., marked $\frac{1}{4}$ S11BT.
	A balsam, 11 ins. diam., bears N. 51° W., 52 lks. dist., marked $\frac{1}{4}$ S2BT.
45.00	Descend abrupt W. slope, entering dense oak, and scattered maple, choke cherry, and mountain laurel.
52.00	Stream of clear water, 10 lks. wide, in canyon, 360 ft. below $\frac{1}{4}$ sec. cor., course S.; ascend E. slope.
67.00	Spur, slopes SE.; ascend along SE. slope, leaving timber.
78.57	The cor. of secs. 2, 3, 10, and 11, 600 ft. above canyon. Land, mountainous. Soil, rocky sandy clay loam; 2nd to 3rd rate. Timber, scattered balsam and Douglas fir. Undergrowth, sagebrush, mountain laurel, choke cherry, oak, maple, and willows. Medium growth of grass and weeds. Good grazing land.
	N. 0° 23' W., between secs. 2 and 3. Ascend over SE. slope, through medium dense undergrowth.
14.00	Spur, 120 ft. above sec. cor., slopes S. 60° E.; descend over NE. slope.
23.20	Draw, 130 ft. below spur, course S. 75° E.; ascend over SE. slope.
28.00	Spur, 60 ft. above draw, slopes E.; descend over NE. slope.
35.30	Draw, 130 ft. below spur, course S. 70° E.; ascend over SE. slope.
42.46	Proportionate dist.; on SE. slope, 100 ft. above draw. No evidence of the $\frac{1}{4}$ sec. cor. found. Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked $\frac{1}{4}$ S 3 S 2 1941 raise a mound of stone, 3½ ft. base, 3 ft. high, W. of cor.
47.00	Spur, 80 ft. above $\frac{1}{4}$ sec. cor., slopes S. 60° E.; descend over NE. slope.
72.00	Enter scattered timber, bears E. and W.
75.60	Small stream of clear water, in draw, 330 ft. below spur, course N. 80° E.; ascend over SE. slope.
81.94	At proportionate dist. along S. bdy. of T. 8 N., R. 2 E. No evidence of the closing cor. of secs. 2 and 3 found. Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the

DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 2 E.

Chains

ground, for closing cor. of secs. 2 and 3, with brass cap marked



1941

from which


A balsam, 11 ins. diam., bears S. 3° E., 37 lks. dist., marked T7NR2ES2CCBT.

An aspen, 9 ins. diam., bears S. 71° W., 38 lks. dist., marked T7NR2ES3CCBT.

From this closing cor., the cor. of secs. 34 and 35, bears S. 89° 26' E., 8.18 chs. dist.

At mid point on N. bdy. of sec. 2

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/4 sec. cor., sec. 2 only, with brass cap marked



1941

from which

An aspen, 6 ins. diam., bears S. 88° E., 40 lks. dist., marked 1/4S2BT.

An aspen, 6 ins. diam., bears S. 20° W., 20 lks. dist., marked 1/4S2BT.

From this 1/4 sec. cor., the 1/4 sec. cor. of sec. 35, bears S. 89° 53' E., 8.88 chs. dist.

Land, mountainous.
 Soil, rocky sandy clay loam; 2nd rate.
 Timber, scattered aspen and Douglas fir on portion of N. half mile.
 Undergrowth, sagebrush, mountain laurel, choke cherry, and honey suckle. Medium growth of grass and weeds.
 Good grazing land.

From the cor. of secs. 33 and 34, on the S. bdy. of Tp. N. 0° 54' E., between secs. 33 and 34.

Along E. slope, through dense undergrowth.

13.40 Head of draw, 30-ft. below sec. cor., course S. 15° E.; ascend over SE. slope.

20.50 Pass or saddle in spur, projecting S. 60° W.; thence descend along N. slope.

34.00 Spur, slopes N. 30° W.; descend steep NE. slope.

40.07 On steep NE. slope, 100 ft. below spur.

The 1/4 sec. cor., which is a quartzite, 11x9x4 ins., marked with 1/4 on W. face, firmly set and unwitnessed.

DEPENDENT RESURVEY OF SUBDIVISION OF T. 7. N., R. 2. E.

Chains

chains

At point for cor. ...
Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with the original cor. stone deposited at base, for $\frac{1}{4}$ sec. cor., with brass cap marked

S33	S34
-----	-----

1941

Thence

N. 2° 58' E., between secs. 33 and 34.

30.70 Small stream of clear water, in draw, 760 ft. below $\frac{1}{4}$ sec. cor., course N. 70° W.; ascend S. slope.

37.00 Top of ascent on point of spur; 140 ft. above draw, slopes N. 80° W.; descend NW. slope.

39.18 Proportionate dist.; on NW. slope, 50 ft. below point of spur.

No evidence of the cor. of secs. 27, 28, 33, and 34 found.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 27, 28, 33, and 34, with brass cap marked

T7N	R2E
S28	S27

S33	S34
-----	-----

1941

stone, $3\frac{1}{2}$ ft. base, 3 ft. high, W. of cor. raise a mound of

Land, mountainous; steep slopes.

Soil, sandy clay loam; 2nd rate.

No timber.

Undergrowth, dense maple, oak, choke cherry, mountain laurel, sagebrush, and honey suckle. Medium growth of grass and weeds. Good grazing land.

From the cor. of secs. 26, 27, 34, and 35.

S. 89° 38' W., between secs. 27 and 34.

Over rolling top of mountain, through medium dense undergrowth of sagebrush, and scattered oak and mahogany.

5.50 Rim of mountain, bears N. 15° E. and S. 15° W.; descend steep rocky W. slope, entering dense oak, maple, choke cherry, mountain laurel, and honeysuckle.

38.00 Draw, 1190 ft. below sec. cor., course NW, thence along N. slope.

38.79 Proportionate dist.

No evidence of $\frac{1}{4}$ sec. cor. found.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the

DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 2 E.

Chains

ground, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$ $\frac{S\ 27}{S\ 34}$

1941

raise a mound of stone, $3\frac{1}{2}$ ft. base, 3 ft. high, N. of cor.

Descend gradually along N. slope.

70.00 Foot of descent, 280 ft. below $\frac{1}{4}$ sec. cor., drains N.; ascend gentle NE. slope.

73.00 Top of ascent, 30 ft. above foot of descent, slopes N.; descend over NW. slope.

77.57 The cor. of secs. 27, 28, 33, and 34, 350 ft. below $\frac{1}{4}$ sec. cor.

Land, mountainous; steep rocky slopes on E. half mile. Soil, rocky sandy clay on E. half mile, and sandy clay loam on W. half mile; 1st to 3rd rate.

No timber.

Undergrowth, oak, maple, choke cherry, mountain laurel, sagebrush, and honeysuckle. Medium growth of grass and weeds. Good grazing land.

N. $1^{\circ} 07'$ W., between secs. 27 and 28.

Descend steep NW. slope, through dense undergrowth.

16.00 Trail in canyon, bears NE. and SW.

18.50 Middle Fork of Ogden River, stream of clear water, 30 lks. wide, in canyon, 220 ft. below sec. cor., course SW.; ascend S. slope.

39.14 Proportionate dist.; on rolling S. slope, 290 ft. above canyon.

No evidence of the $\frac{1}{4}$ sec. cor. found.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$
S28 | S27

1941

raise a mound of stone, $3\frac{1}{2}$ ft. base, 3 ft. high, W. of cor.

65.00 Ascend over SW. slope, entering scattered undergrowth.

78.27 Proportionate dist.; on spur, 720 ft. above $\frac{1}{4}$ sec. cor., slopes S. 15° E.

No evidence of the cor. of secs. 21, 22, 27, and 28 found.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 21, 22, 27, and 28, with brass cap marked

Chains

Balance

T7N	R2E
S21	S22
S28	S27

1941

stone, 3 ft. base, 3 ft. high, W. of cor.

raise a mound of

Land, mountainous; rolling slopes.

Soil, rocky sandy clay loam; 2nd to 3rd rate.

No timber.

Undergrowth, oak, sagebrush, maple, and scattered honey-suckle. Medium growth of grass and weeds.

Good grazing land.

From the cor. of secs. 22, 23, 26, and 27.

S. 87° 30' W., between secs. 22 and 27.

Descend along N. slope, through dense undergrowth.

3.50 Descend NW. slope.

28.60 Trail, bears N. 30° E., and S. 30° W.

31.40 Draw, course SW.

35.20 Middle Fork of Ogden River, stream of clear water, 30 lks. wide, in canyon, 770 ft. below sec. cor., course S.; ascend over E. slope.

37.90 Trail, bears N. and S.

38.90 Proportionate dist.; on W. side of bottom of canyon.

No evidence of the $\frac{1}{4}$ sec. cor. found.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$	S 22
	S 27

1941

stone, 3 $\frac{1}{2}$ ft. base, 3 ft. high, N. of cor.

raise a mound of

Ascend over E. slope.

51.00 Spur, 350 ft. above $\frac{1}{4}$ sec. cor., slopes S.; descend SW. slope.

64.00 Draw, 70 ft. below spur, course S. 10° E.; ascend over SE. slope.

77.81 The cor. of secs. 21, 22, 27, and 28, 490 ft. above draw.

Land, mountainous.

Soil, rocky sandy clay loam; 3rd rate.

No timber.

Undergrowth, oak, maple, mountain laurel, and sagebrush. Medium growth of grass and weeds. Good grazing land.

DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 2 E.

Chains

N. 0° 24' E., between secs. 21 and 22.

Ascend along SE. slope, through scattered undergrowth.

34.00 Top of ascent on rocky point, 570 ft. above sec. cor., slopes E.; descend along rocky E. slope, entering medium dense undergrowth.

39.13 Proportionate dist.; on rocky E. slope, 200 ft. below top of ascent.

No evidence of the $\frac{1}{4}$ sec. cor. found.

Set an iron post, 3 ft. long, 1 in. diam., 22 ins. in the ground to solid rock, and in mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$
 S21 | S22
 1941

stone, $3\frac{1}{2}$ ft. base, 3 ft. high, W. of cor. raise a mound of

41.00 Draw, course S. 30° E.; ascend abrupt rocky S. slope.

71.00 Spur, 850 ft. above $\frac{1}{4}$ sec. cor., projects E.; descend over N. slope, entering scattered timber.

76.60 Draw, 140 ft. below spur, course N. 80° E.; ascend over SE. slope, leaving timber.

78.26 Proportionate dist.; on SE. slope, 40 ft. above draw.

No evidence of the cor. of secs. 15, 16, 21, and 22 found.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 15, 16, 21, and 22, with brass cap marked

T7N | R2E
 S16 | S15
 S21 | S22

1941

stone, $3\frac{1}{2}$ ft. base, 3 ft. high, W. of cor. raise a mound of

Land, mountainous; rocky slopes.

Soil, rocky sandy clay loam; 3rd rate.

Timber, scattered aspen and Douglas fir on portion of N. half mile.

Undergrowth, sagebrush, choke cherry, oak, and mountain laruel. Medium growth of grass and weeds.

Fair to good grazing land.

From the cor. of secs. 14, 15, 22, and 23.

S. 86° 52' W., between secs. 15 and 22.

Ascend over rolling SE. slope, through medium dense undergrowth.

16.00 Small draw, course SE.; ascend abrupt rocky SE. slope.

DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 2 E.

Chains

31210

38.00 Top of ascent, 780 ft. above sec. cor.; slopes S.; thence along rocky S. slope.

39.26 Proportionate dist.; on rocky S. slope.

No evidence of the 1/4 sec. cor. found.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/4 sec. cor., with brass cap marked

1/4 S 15
S 22

1941

stone, 3 1/2 ft. base, 3 ft. high, N. of cor. raise a mound of

40.00 Ascend rocky SE. slope.

50.00 Rocky spur, 260 ft. above 1/4 sec. cor., projects N. 60° E. descend over NW. slope.

60.50 Draw, 120 ft. below spur, course NE.; ascend SE. slope.

70.52 The cor. of secs. 15, 16, 21, and 22, 330 ft. above draw.

Land, mountainous; rocky slopes.
Soil, rocky sandy clay loam; 3rd rate.
No timber.
Undergrowth, sagebrush, and scattered oak, maple, mountain laurel, and mahogany. Medium growth of grass and weeds.
Good grazing land.

N. 0° 53' E., between secs. 15 and 16.

Ascend over SE. slope, through scattered undergrowth.

7.00 Spur, 50 ft. above sec. cor., slopes E.; descend over N. slope, entering scattered timber, and dense undergrowth.

20.00 Draw, 200 ft. below spur, course E.; ascend S. slope.

28.00 Spur, 70 ft. above draw, slopes E.; descend NE. slope.

30.40 Draw, 30 ft. below spur, course S. 70° E.; ascend steep rocky S. slope.

39.13 Proportionate dist.; on rocky S. slope, 130 ft. above draw

No evidence of the 1/4 sec. cor. found.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/4 sec. cor., with brass cap marked

S16 | S15

1941

stone, 3 1/2 ft. base, 3 ft. high, W. of cor. raise a mound of

48.00 Rocky point, 400 ft. above 1/4 sec. cor., slopes SE.; descend steep rocky NE. slope.

DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 2 E.

Chains

- 58.00 Head of rocky draw, 200 ft. below rocky point, course SE.; ascend abrupt rocky SE. slope.
- 63.00 Rim of mountain, 300 ft. above head of draw, bears NE. and SW.; thence over rolling mountain top.
- 75.00 Enter dense small aspen, bears E. and W.
- 78.27 The cor. of secs. 9, 10, 15, and 16, which is a sandstone, 16x12x10 ins., marked with 3 notches on E., and 4 notches on S. edge, firmly set in the ground and mound of stone.

At point for cor.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, with the original cor. stone deposited at base, for cor. of secs. 9, 10, 15, and 16, with brass cap marked

T7N	R2E
S 9	S10
S16	S15

1941

from which

An aspen, 5 ins. diam., bears N. 49° E., 50 lks. dist., marked T7NR2ES10BT.

An aspen, 6 ins. diam., bears S. 44° E., 99 lks. dist., marked T7NR2ES15BT.

An aspen, 5 ins. diam., bears S. 81° W., 71 lks. dist., marked T7NR2ES16BT.

An aspen, 5 ins. diam., bears N. 32° W., 53 lks. dist., marked T7NR2ES9BT.

Land, mountainous; steep rocky slopes.

Soil, rocky sandy clay loam; 3rd to 4th rate.

Timber, aspen and scattered Douglas fir on portion of mile.

Undergrowth, sagebrush, choke cherry, and mountain laurel.

Mediu, growth of grass and weeds. Fair grazing land.

From the cor. of secs. 10, 11, 14, and 15.

S. 86° 19' W., between secs. 10 and 15.

Ascend NE. slope, through medium dense timber, and undergrowth.

12.00 Leave timber, bears NE. and SW.

19.00 Spur, 450 ft. above sec. cor., slopes SE.; descend over SW. slope.

27.50 Draw, 130 ft. below spur, course SE.; ascend steep rocky NE. slope.

39.62 Proportionate dist.; on rocky NE. slope, 320 ft. above draw.

No evidence of the $\frac{1}{4}$ sec. cor. found.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked

DEPENDENT RESURVEY OF SUBDIVISION OF T. 7. N., R. 2. E.

Chains	
	<p style="text-align: right;">S 10 S 15</p> <p style="text-align: center;">1941</p> <p style="text-align: right;">raise a mound of stone, 3 ft. base, 3 ft. high, N. of cor.</p>
60.00	Enter scattered undergrowth.
71.00	Rim of mountain, 1000 ft. above $\frac{1}{4}$ sec. cor., bears N. and S.; thence over rolling mountain top, entering medium dense timber.
79.25	The cor. of secs. 9, 10, 15, and 16.
	<p>Land, mountainous; steep rocky slopes. Soil, rocky sandy clay loam; 2nd to 3rd rate. Timber, aspen, Douglas fir, and balsam on portion of mile. Undergrowth, mountain laurel, choke cherry, honeysuckle, and oak. Medium growth of grass and weeds. Fair grazing land.</p>
	<p>N. 0° 55' E., between secs. 9 and 10...</p> <p>Descend over gentle NE. slope, through medium dense timber and undergrowth.</p>
15.00	Descend abrupt N. slope, bears N. 80° E., and S. 80° W.
35.50	Canyon, 780 ft. below sec. cor., course N. 80° E.; thence along E. slope.
39.00	Descend over NE. slope.
43.42	On NE. slope, 840 ft. below sec. cor.
	<p>The $\frac{1}{4}$ sec. cor., which is a sandstone, 16x16x6 ins., marked with $\frac{1}{4}$ on W. face, firmly set in the ground and in mound of stone.</p> <p>At point for cor.</p> <p>Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with the original cor. stone deposited at base, for $\frac{1}{4}$ sec. cor., with brass cap marked</p>
	<p style="text-align: center;">S 9 S 10</p> <p style="text-align: center;">1941</p> <p style="text-align: right;">from which</p> <p>An aspen, 6 ins. diam., bears N. 60° 30' E., 23 lks. dist., marked $\frac{1}{4}$S10BT.</p> <p>A balsam, 12 ins. diam., bears N. 31° 30' W., 230 lks. dist., marked $\frac{1}{4}$S9BT.</p>
	<p>Thence</p> <p>N. 0° 46' E., between secs. 9 and 10.</p>
1.50	Leave timber, bears NW. and SE.
4.60	Canyon, 40 ft. below $\frac{1}{4}$ sec. cor., course S. 60° E.; ascend steep SW. slope, entering dense oak brush.

DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 2 E.

Chains


16.50 Rim of canyon; bears NW. and SE.; ascend over rolling SW. slope, leaving oak brush.

38.76 On rolling SW. slope, 560 ft. above canyon.

The cor. of secs. 3, 4, 9, and 10, which is a quartzite, 16x12x8 ins., marked with 3 notches on E., and 5 notches on S. edge, firmly set in the ground and in mound of stone.

At point for cor.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, with the original cor. stone deposited at base, for cor. of secs. 3, 4, 9, and 10, with brass cap marked



1941

raise a mound of stone, 3 1/2 ft. base, 3 ft. high, W. of cor.

Land, mountainous.

Soil, rocky sandy clay loam; 2nd to 3rd rate.

Timber, aspen and Douglas fir on portion of mile.

Undergrowth, mountain laurel, sagebrush, choke cherry, honeysuckle, and oak. Medium growth of grass and weeds. Good grazing land.

From the cor. of secs. 2, 3, 10, and 11.

S. 88° 43' W., between secs. 3 and 10.

Ascend SE. slope, through medium dense undergrowth.

5.00 Spur, 90 ft. above sec. cor., slopes S. 15° E.; descend SW. slope.


12.70 Draw, 90 ft. below spur, course S. 20° E.; ascend over NE. slope, entering scattered fir and clumps of aspen timber.

38.87 At top of abrupt ascent, 670 ft. above draw, bears NW. and SE.

The 1/4 sec. cor., which is a quartzite, 12x8x5 ins., marked with 1/4 on N. face, firmly set and witnessed by small mound of stone to the N.

At point for cor.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with the original cor. stone deposited at base, for 1/4 sec. cor., with brass cap marked



1941

from which

A balsam, 4 ins. diam., bears N. 58° E., 80 lks. dist., marked 1/4S3BT.

A balsam, 9 ins. diam., bears S. 1° 30' W., 66 lks. dist., marked 1/4S10BT.

DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 2 E.


- Chains chains
- Thence
S. $68^{\circ} 02'$ W., between secs. 3 and 10.
Ascend over rolling NE. slope.
- 22.00 Spur, 200 ft. above $\frac{1}{4}$ sec. cor., projects SE.; descend over rolling SW. slope.
- 33.00 Leave timber, bears NW. and SE.
- 36.74 The cor. of secs. 3, 4, 9, and 10, 270 ft. below spur.
Land, mountainous; steep to rolling slopes.
Soil, rocky sandy clay loam; 2nd to 3rd rate.
Timber, scattered Douglas fir, balsam, and aspen.
Undergrowth, mountain laurel, sagebrush, and scattered oak, choke cherry, honeysuckle, and mahogany. Medium growth of grass and weeds. Good grazing land.
-
- N. $0^{\circ} 08'$ W., between secs. 3 and 4.
Ascend over SW. slope, through medium dense undergrowth.
- 16.00 Enter scattered timber.
- 26.00 Spur, 550 ft. above sec. cor., projects SE.; descend over NE. slope.
- 39.26 Proportionate dist.; on NE. slope and S. side of draw, 90 ft. below spur.
No evidence of the $\frac{1}{4}$ sec. cor. found.
Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked
- $$\begin{array}{c} \frac{1}{4} \\ \hline S \ 4 \ | \ S \ 3 \\ 1941 \end{array}$$
- from which
- A balsam, 18 ins. diam., bears N. $38^{\circ} 30'$ E., 65 lks. dist., marked $\frac{1}{4}$ S3BT.
- An aspen, 7 ins. diam., bears S. 22° W., 131 lks. dist., marked $\frac{1}{4}$ S4BT.
- 40.90 Draw, course N. 75° E.; ascend over SE. slope.
- 49.00 Spur, 40 ft. above draw, projects N. 75° E.; descend over NE. slope.
- 62.70 Draw, 200 ft. below spur, course N. 75° E.; ascend over SE. slope.
- 75.51 The closing cor. of secs. 3 and 4, which is a quartzite, 1x12x6 ins., marked with 3 notches on E. and W. edges, and 6 notches and CC on S. face, firmly set in the ground and mound of stone. I mark WP on N. face of this cor. monument, for witness point.
- 79.00 Spur, 180 ft. above draw, projects E.; descend over rolling NE. slope.

DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 2 E.

Chains

84.56 Intersect the S. bdy. of T. 8.N., R. 2.E.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for closing cor. of secs. 3 and 4, with brass cap marked



1941 from which

A balsam, 8 ins. diam., bears S. 17° E., 33 lks. dist., marked T7NR2ES3CCBT.

A balsam, 6 ins. diam., bears S. 58° W., 76 lks. dist., marked T7NR2ES4CCBT.

From this closing cor., the cor. of secs. 33 and 34, bears S. 89° 27' E., 3.73 chs. dist.

At mid point on N. bdy. of sec. 3

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/4 sec. cor., sec. 3 only, with brass cap marked



1941 from which

A balsam, 20 ins. diam., bears S. 17° 45' W., 208 lks. dist., marked 1/4 S3BT.

A Douglas fir, 18 ins. diam., bears S. 54° 30' W., 291 lks. dist., marked 1/4 S3BT.

From this 1/4 sec. cor., the 1/4 sec. cor. sec. 34, bears S. 89° 26' E., 5.96 chs. dist.

Land, mountainous; rolling slopes. Soil, rocky sandy clay loam; 2nd rate. Timber, scattered Douglas fir, balsam, and aspen on portion of mile. Undergrowth, mountain laurel, sagebrush, honeysuckle, and choke cherry. Medium growth of grass and weeds. Good grazing land.

Reestablishment of surveys executed by J. Fewson Smith, Deputy Surveyor, in 1871.

From the cor. of secs. 4, 5, 32, and 33, on S. bdy. of Tp. N. 0° 33' W., between secs. 32 and 33.

Descend NW. slope, through medium dense undergrowth.

22.00 Bottom of canyon, bears NE. and SW.; thence over rolling bottom of canyon.

28.70 Middle Fork of Ogden River, stream of clear water, 30 lks. wide, in canyon 430 ft. below sec. cor., course S. 80° W.; ascend over rolling SE. slope.

31.10 Barbed wire fence, bears N. 80° E., and S. 80° W.

Chains

encl. 10

31.30 Old road, bears N. 80° E., and S. 80° W.

40.63 On rolling SE. slope, 80 ft. above canyon.

The $\frac{1}{4}$ sec. cor., which is a quartzite, 24x8x6 ins., marked with $\frac{1}{4}$ on W. face, firmly set in the ground and mound of stone.

At point for cor.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with the original cor. stone deposited at base, for $\frac{1}{4}$ sec. cor., with brass cap marked



raise a mound of stone, 3 1/2 ft. base, 3 ft. high, W. of cor.

Thence


N. 0° 08' E., between secs. 32 and 33.

39.61 On SE. slope, 480 ft. above $\frac{1}{4}$ sec. cor.

The cor. of secs. 32 and 33, which is a quartzite, 24x10x8 ins., marked with 4 notches on E., and 1 notch on S. edge, firmly set in the ground and mound of stone.

At point for cor.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, with the original cor. stone deposited at base, for cor. of secs. 32 and 33 only, with brass cap marked



stone, 3 1/2 ft. base, 3 ft. high, S. of cor. raise a mound of

Land, mountainous.

Soil, rocky sandy clay loam; 2nd to 3rd rate.

No timber.

Undergrowth, sagebrush, maple, and oak. Medium growth of grass and weeds. Good grazing land.

Reestablishment of surveys executed by John T. Breckon, Deputy Surveyor, in 1893.

From the cor. of secs. 27, 28, 33, and 34.

N. 87° 33' W., between secs. 28 and 33.

Descend steep NW. slope, through dense undergrowth.

13.00 Middle Fork of Ogden River, stream of clear water, 30 lks. wide, in canyon 250 ft. below sec. cor., course SW.; ascend over rolling SE. slope.

DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 2 E.

Chains

17.50 Old road, bears NE. and SW.

37.57 On gentle SE. slope, 70 ft. above canyon.

The $\frac{1}{4}$ sec. cor., for sec. 33, which is a quartzite, 16x8x6 ins., marked with $\frac{1}{4}$ on N. face, firmly set in a mound of stone.

At point for cor.

Set an iron post, 3 ft. long, 1 in. diam., 22 ins. in the ground to solid rock, and in mound of stone to top, with the original cor. stone deposited at base, for $\frac{1}{4}$ sec. cor. sec. 33 only, with brass cap marked

$\frac{1}{4}$ S 33

1941

raise a mound of stone, $3\frac{1}{2}$ ft. base, 3 ft. high, S. of cor.

Reestablishment of surveys executed by J. Fewson Smith, Deputy Surveyor, in 1871.

Thence

N. 89° 48' W., between secs. 28 and 33.

2.10 Mid point on S. bdy. of sec. 28.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., sec. 28 only, with brass cap marked

$\frac{1}{4}$ S28

1941

raise a mound of stone, $3\frac{1}{2}$ ft. base, 3 ft. high, N. of cor.

38.30 Small draw, course S. 15° E.; ascend.

40.57 The cor. of secs. 32 and 33, 330 ft. above $\frac{1}{4}$ sec. cor.

Land, mountainous; rolling slopes.

Soil, rocky sandy clay loam; 3rd rate.

No timber:

Undergrowth, sagebrush, oak, and scattered maple. Medium growth of grass and weeds. Good grazing land.

Reestablishment of surveys executed by John T. Brecken, Deputy Surveyor, in 1893.

From the closing cor. of secs. 28 and 29, which is a quartzite, 12x8x6 ins., marked with 4 notches on E., 1 notch on S. edge, and CC on N. face, firmly set in a mound of stone.

At point for cor.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, with the original cor. stone deposited at base, for closing cor. of secs. 28 and 29, with brass cap marked

DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 2 E.

Chains

211110

CC
T7N | R2E
S29 | S28

S32
1941

raise a mound of stone, 3 ft. base, 3 ft. high, N. of cor.

From this closing cor., the cor. of secs. 32 and 33, bears S. 89° 43' E., 1.18 chs. dist.

Thence

N. 0° 02' W., between secs. 28 and 29.

Along E. slope, through medium dense undergrowth.

6.60 Small draw, 30 ft. below sec. cor., course S. 15° E.; ascend gradually over rolling SW. slope.

39.38 Proportionate dist.; on rolling SW. slope, 490 ft. above sec. cor.

No evidence of the 1/4 sec. cor. found.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/4 sec. cor., with brass cap marked

1/4
S29 | S28

1941

raise a mound of stone, 3 1/2 ft. base, 3 ft. high, W. of cor.

45.00 Foot of rocky spur, bears NE. and SW.; ascend rocky SE. slope broken by ledges.

63.00 Top of abrupt ascent, slopes E.; thence along rocky E. slope.

72.00 Top of ascent, 930 ft. above 1/4 sec. cor., slopes E.; descend along E. slope.

78.66 On E. slope, 120 ft. below top of ascent.

The cor. of secs. 20, 21, 28, and 29, which is a quartzite, 18x6x5 ins., marked with 4 notches on E., and 2 notches on S. edge, set in mound of stone.

At point for cor.

Set an iron post, 3 ft. long, 2 ins. diam., 16 ins. in the ground to solid rock, and in mound of stone to top, with the original cor. stone deposited at base, for cor. of secs. 20, 21, 28, and 29, with brass cap marked

T7N | R2E
S20 | S21

S29 | S28

1941

Land, mountainous.

Soil, rocky sandy clay loam; 2nd to 4th rate.

No timber.

DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 2 E.

Chains

Undergrowth, sagebrush, oak, and scattered maple and mountain laurel. Medium growth of grass and weeds. Good grazing land.

From the cor. of secs. 21, 22, 27, and 28.

N. 88° 25' W., between secs. 21 and 28.

Descend SW. slope, through medium dense undergrowth;

13.50 Draw, 140 ft. below sec. cor., course S. 15° E.; ascend over SE. slope.

25.00 Top of ascent on point of spur, 410 ft. above draw, slopes S.; descend rocky SW. slope.

34.00 Small draw, 160 ft. below spur, course S. 15° W.; ascend rocky SE. slope.

38.88 Proportionate dist.; on rocky SE. slope, 100 ft. above draw.

No evidence of the $\frac{1}{4}$ sec. cor. found.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$ $\frac{S\ 21}{S\ 28}$

1941

raise a mound of stone, 3 ft. base, 3 ft. high, N. of cor.

49.00 Spur, 200 ft. above $\frac{1}{4}$ sec. cor., projects S. 15° W.; descend rocky SW. slope.

60.50 Draw, 470 ft. below spur, course S. 20° W.; ascend over rocky SE. slope.

77.77 The cor. of secs. 20, 21, 28, and 29, 230 ft. above draw.

Land, mountainous; rocky slopes.

Soil, rocky sandy clay loam; 3rd to 4th rate.

No timber.

Undergrowth, sagebrush, oak, maple, and scattered mahogany.

Medium growth of grass and weeds. Fair grazing land.

N. 0° 41' W., between secs. 20 and 21.

Ascend steep rocky SE. slope broken by quartzite outcroppings, through scattered undergrowth.

21.50 Rocky spur, 490 ft. above sec. cor., projects S. 60° W.; descend NW. slope, entering medium dense undergrowth.

31.30 Draw, 150 ft. below spur, course S. 70° W.; ascend over S. slope.

39.18 Proportionate dist.; on S. slope, 170 ft. above draw.


No evidence of the $\frac{1}{4}$ sec. cor. found.

DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 2 E.

Chains

amlsd0


Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground to solid rock, and in mound of stone to top, with a sandstone, 8x6x4 ins., marked X, deposited at base, for $\frac{1}{4}$ sec. cor., with brass cap marked



56.00 Enter scattered timber, bears E. and W.

78.36 Proportionate dist., on S. slope, 920 ft. above $\frac{1}{4}$ sec. cor. No evidence of the cor. of secs. 16, 17, 20, and 21 found.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 16, 17, 20, and 21, with brass cap marked



1941 from which

A limber pine, 12 ins. diam., bears N. 22° E., 144 lks. dist., marked T7NR2ES16BT.

A Douglas fir, 18 ins. diam., bears S. 65° E., 159 lks. dist., marked T7NR2ES21BT.

A Douglas fir, 32 ins. diam., bears S. 62° 30' W., 146 lks. dist., marked T7NR2ES20BT.

A Douglas fir, 9 ins. diam., bears N. 55° W., 12 lks. dist., marked T7NR2ES17BT.

Land, mountainous; steep rocky slopes on S. portion. Soil, rocky sandy clay loam; 3rd to 4th rate. Timber, scattered Douglas fir and limber pine on portion of N. half mile. Undergrowth, sagebrush, and scattered oak, maple, mountain laurel, and mahogany. Medium growth of grass and weeds. Fair grazing land.

From the cor. of secs. 15, 16, 21, and 22.

N. 83° 16' W., between secs. 16 and 21.

Ascend steep SE. slope, through scattered undergrowth.

16.00 Spur, 300 ft. above sec. cor., projects S. 20° E.; descend along S. slope.

28.50 Head of draw, 20 ft. below spur, course S. 20° E.; ascend SE. slope, entering very scattered timber.

39.44 On SE. slope, 120 ft. above draw.

The $\frac{1}{4}$ sec. cor., which is a sandstone, 18x12x4 ins., marked with X on N. face, firmly set in a mound of stone,

At point for cor.

DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 2 E.

Chains

Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground to solid rock, and in mound of stone to top, with the original cor. stone deposited at base, for 1/4 sec. cor., with brass cap marked

CROSS
PAGE

1/4 S 16
S 21

1941 from which

A limber pine, 24 ins. diam.; bears S. 27° 45' W., 270 lks. dist., marked 1/4 S21BT.

A Douglas fir, 48 ins. diam., bears N. 21° W., 477 lks. dist., marked 1/4 S16BT.

Thence

S. 86° 38' W., between secs. 16 and 21.

18.00 Spur, 350 ft. above 1/4 sec. cor.; slopes S.; ascend along steep rocky S. slope.

40.16 The cor. of secs. 16, 17, 20, and 21, 470 ft. above 1/4 sec. cor.

Land, mountainous.
Soil, rocky sandy clay loam; 3rd rate.
Timber, very scattered Douglas fir and limber pine on portion of mile.
Undergrowth, scattered sagebrush, mountain laurel, and oak. Medium growth of grass and weeds. Good grazing land.

N. 1° 13' E., between secs. 16 and 17.

Ascend steep rocky S. slope, through scattered Douglas fir and limber pine, and scattered undergrowth.

4.00 Ridge and top of mountain, 120 ft. above sec. cor., bears E. and W.; descend over rolling NW. slope, entering scattered aspen timber.

39.19 On NW. slope, 330 ft. below ridge.

The 1/4 sec. cor., which is a sandstone, 22x12x12 ins., marked with 1/4 on W. face, firmly set in the ground and unwitnessed.

At point for cor.

Set an iron post, 3 ft. long, 1 in. diam., 6 ins. in the ground to solid rock, and in mound of stone to top, with the original cor. stone deposited at base, for 1/4 sec. cor., with brass cap marked

1/4
S17 | S16

1941 from which

A Douglas fir, 16 ins. diam., bears N. 86° 30' E., 158 lks. dist., marked 1/4 S16BT.

A Douglas fir, 14 ins. diam., bears S. 63° 30' W., 124 lks. dist., marked 1/4 S17BT.

DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 2 E.

Chains

511103

Thence.

N. 0° 04' W., between secs. 16 and 17.

Descend NW. slope, entering medium dense fir timber.

15.60 Draw, 60 ft. below 1/4 sec. cor., course S. 80° W.; ascend over rolling S. slope, entering scattered clumps of aspen and leaving fir timber.

15.80 Trail, bears E. and W.

21.00 Leave timber, bears E. and W.

39.60 On S. slope, 130 ft. above draw.

The cor. of secs. 8, 9, 16, and 17, which is a quartzite, 22x18x10 ins., marked with 4 notches on E., and S. edge, firmly set in the ground and mound of stone.

At point for cor.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, with the original cor. stone deposited at base, for cor. of secs. 8, 9, 16, and 17, with brass cap marked

T7N	R2E
S 8	S 9
S17	S16

1941

raise a mound of stone, 3 1/2 ft. base, 3 ft. high, W. of cor.

Land, mountainous; rolling slopes. Soil, rocky sandy clay loam; 2nd to 3rd rate. Timber, Douglas fir, balsam, and aspen on portion of mile. Undergrowth, sagebrush, and scattered mountain laurel and honeysuckle. Medium growth of grass and weeds. Good grazing land.

From the cor. of secs. 9, 10, 15, and 16.

N. 86° 26' W., between secs. 9 and 16.

Ascend E. slope over rolling mountain top, through dense timber, and medium dense undergrowth.

7.00 Ascend over rolling NE. slope.

29.00 Leave timber, bears N. and S.

30.80 Head of draw, course NE.; enter dense aspen, bears NE. and SW.

39.68 The 1/4 sec. cor., which is a sandstone, 16x8x5 ins., marked with 1/4 on N. face, firmly set in the ground and unwitnessed

At point for cor.

Set an iron post, 3 ft. long, 1 in. diam., 16 ins. in the ground to solid rock and in mound of stone to top, with the original cor. stone deposited at base, for 1/4 sec. cor. with brass cap marked

DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 2 E.

Chains

$\frac{1}{4}$ S 9
S 16

1941

Thence

N. 89° 33' W.; between secs. 9 and 16.

3.00 Leave aspen timber, bears N. and S.

10.00 Trail, bears N. and S.

40.01 The cor. of secs. 8, 9, 16, and 17.

Land, mountainous; rolling slopes.
Soil, rocky sandy clay loam; 2nd rate.
Timber, scrub aspen and scattered Douglas fir and balsam on portion of mile.
Undergrowth, sagebrush, honeysuckle, and young aspen.
Medium growth of grass and weeds. Good grazing land.

N. 0° 45' W., between secs. 8 and 9.

Ascend over gently rolling SW. slope, through medium dense undergrowth.

41.90 Proportionate dist.; on rolling top of ridge, 200 ft. above sec. cor., bears N. 30° W. and S. 30° E.

No evidence of the $\frac{1}{4}$ sec. cor. found.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$
S 8 | S 9

1944

from which

A balsam, 4 ins. diam., bears N. 82° E., 70 lks. dist., marked BT.

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

47.00 Descend over NE. slope.

55.00 Enter medium dense aspen timber, bears NW. and SE.

64.00 Head of draw, 130 ft. below $\frac{1}{4}$ sec. cor., course E.; ascend S. slope.

71.00 Leave aspen timber, bears E. and W.

Proportionate distance;

83.80 / On point of spur, 190 ft. above draw, slopes S. 80° E.

No evidence of the cor. of secs. 4, 5, 8, and 9 found.

Set an iron post, 3 ft. long, 2 ins. diam., 20 ins. in the ground to solid rock, and in mound of stone to top, with a limestone, 5x5x5 ins., marked K, deposited at base, for cor. of secs. 4, 5, 8, and 9, with brass cap marked

DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 2 E.

Chains

an land

T7N R2E

S 5 | S 4

S 8 | S 9

1944

Land, mountainous; rolling slopes.
 Soil, rocky sandy clay loam; 2nd rate.
 Timber, aspen on portion of mile.
 Undergrowth, sagebrush and honeysuckle. Medium growth of
 grass and weeds. Good grazing land.

From the cor. of secs. 3, 4, 9, and 10.

N. 87° 05' W., between secs. 4 and 9

Descend over NW. slope, through scattered timber, and
 dense undergrowth.

3.00 Small draw, 15 ft. below sec. cor., course SW.; ascend
 over SE. slope.

18.00 Top of ascent, 240 ft. above draw, slopes S.; descend over
 SW. slope.

41.12 Proportionate dist.; on SW. slope, 165 ft. below top of
 ascent.

No evidence of the $\frac{1}{4}$ sec. cor. found.

Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the
 ground to solid rock, and in mound of stone to top, for
 $\frac{1}{4}$ sec. cor., with brass cap marked

$$\frac{1}{4} \begin{array}{l} S 4 \\ S 9 \end{array}$$

1944

from which

An aspen, 6 ins. diam., bears N. 46° 30' E., 35 lks.
 dist., marked $\frac{1}{4}$ S4BT.

An aspen, 6 ins. diam., bears S. 26° E., 59 lks.
 dist., marked $\frac{1}{4}$ S9BT.

42.50 Draw, 25 ft. below $\frac{1}{4}$ sec. cor., course S. 60° E.; ascend
 over NE. slope.

82.24 The cor. of secs. 4, 5, 8, and 9, 525 ft. above draw.

Land, mountainous.

Soil, rocky sandy clay loam; 2nd rate.

Timber, scattered aspen and Douglas fir.

Undergrowth, sagebrush, and honeysuckle. Medium growth
 of grass and weeds. Good grazing land.

N. 0° 46' W., between secs. 4 and 5.

Descend over NE. slope, through dense undergrowth.

8.00 Enter medium dense aspen timber, bears NW. and SE.

DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 2 E.

Chains

14.00 Foot of descent, bears NW. and SE.; thence along gentle E. slope across head of draw.

29.50 Head of draw, 170 ft. below sec. cor., course S. 60° E.; ascend S. slope, leaving timber.


37.00 Enter medium dense aspen and fir timber, bears E. and W.

39.00 Ridge, 200 ft. above draw, bears E. and W.; trail along ridge.

41.90 Proportionate dist.; on N. side of ridge.

No evidence of the 1/4 sec. cor. found.

Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground to solid rock, and in mound of stone to top, for 1/4 sec. cor., with brass cap marked



1944

from which


A Douglas fir, 14 ins. diam., bears N. 83° 30' W., 53 lks. dist., marked 1/4 S5BT.

Descend over NW. slope.

80.56 At proportionate dist. along S. bdy. of T. 8 N., R. 2 E.; 500 ft. below ridge.

No evidence of the closing cor. of secs. 4 and 5 found.

Set an iron post, 3 ft. long, 2 ins. diam., 18 ins. in the ground to solid rock, and in mound of stone to top, for closing cor. of secs. 4 and 5, with brass cap marked



1941

from which

An aspen, 5 ins. diam., bears S. 10° 15' E., 120 lks. dist., marked T7NR2ES4CCBT.

A balsam, 8 ins. diam., bears S. 79° 45' W., 75 lks. dist., marked T7NR2ES5CCBT.

From this closing cor., the cor. of secs. 32 and 33, bears S. 89° 48' E., 5.00 chs. dist.

At mid point on N. bdy. of sec. 4.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/4 sec. cor., set. 4 only, with brass cap marked



1941

from which

An aspen, 6 ins. diam., bears S. 60° E., 10 lks. dist., marked 1/4 S4BT.

DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 2 E.

Chains

continued

An aspen, .5 ins. diam., bears S. 86° W., 26 lks. dist., marked $\frac{1}{4}$ BT.

From this $\frac{1}{4}$ sec. cor., the $\frac{1}{4}$ sec. cor. of sec. 33, bears S. $89^{\circ} 51'$ E., 4.21 chs. dist.

Land, mountainous.

Soil, rocky sandy clay loam; 2nd to 3rd rate.

Timber, Douglas fir, balsam, and aspen on portion of mile

Undergrowth, sagebrush and honeysuckle. Medium growth of grass and weeds. Good grazing land.

Reestablishment of surveys executed by J. Pewson Smith, Deputy Surveyor, in 1871.

From the cor. of secs. 5, 6, 31, and 32, on S. bdy. of T. 7 N. $0^{\circ} 13'$ E., between secs. 31 and 32.

Along road, bearing N. and S., over rolling land.

9.00 Road, bears E., and S.

From this point, a frame house, bears W., about 3.00 chs. dist.

9.50 Barbed wire fence, bears W., and E. about 50 lks. dist. to cor. of fences, bearing N. and S.; enter cultivated land.

14.50 Leave cultivated land, bears E. and W.; ascend S. slope of spur, entering medium dense undergrowth.

20.25 Barbed wire fence, bears E. and W.

28.00 Point of spur, slopes SW.; ascend along W. slope.

36.00 Top of ascent, 400 ft. above sec. cor., slopes W.; descend over NW. slope.

40.00 On NW. slope, 30 ft. below top of ascent.

The $\frac{1}{4}$ sec. cor., which is a quartzite, 18x9x5 ins., marked with $\frac{1}{4}$ on W. face, firmly set in mound of stone.

At point for cor.

Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground to solid rock, and in mound of stone to top, with the original cor. stone deposited at base, for $\frac{1}{4}$ sec. cor. with brass cap marked

$\frac{1}{4}$
 S31 | S32
 1941

Thence

N. $0^{\circ} 16'$ E., between secs. 31 and 32.

18.30 Draw, 70 ft. below $\frac{1}{4}$ sec. cor., course SW.; ascend over rolling S. slope.

40.51 On S. slope, 220 ft. above draw.


DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 2 E.

Chains

The cor. of secs. 31 and 32, which is a quartzite, 24x16x8 ins., marked with 5 notches on E., and 1 notch on S. edge, firmly set in the ground and in mound of stone.

At point for cor.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, with the original cor. stone deposited at base, for cor. of secs. 31 and 32 only, with brass cap marked



raise a mound of stone, 3 1/2 ft. base, 3 ft. high, S. of cor.

Land, mountainous; rolling slopes. Soil, rocky and gravelly sandy clay; 2nd to 3rd rate. No timber. Undergrowth, medium dense sagebrush. Medium growth of grass and weeds. Good grazing land.

From the cor. of secs. 32 and 33.

N. 89° 43' W., along N. bdy. of sec. 32.

Ascend over SE. slope, through medium dense undergrowth.

1.18 The closing cor. of secs. 28 and 29.

5.00 Top of ascent, 90 ft. above sec. cor., slopes S.; descend NW. slope.


15.60 Draw, 150 ft. below top of ascent, course S. 20° E.; ascend SE. slope.

34.00 Spur, 490 ft. above draw, slopes S. 20° W.; descend SW. slope.

39.75 Proportionate dist.; on SW. slope, 70 ft. below spur.

No evidence of the 1/4 sec. cor. found.


Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground to solid rock, and in mound of stone to top, for 1/4 sec. cor., sec. 32 only, with brass cap marked



raise a mound of stone, 3 ft. base, 3 ft. high, S. of cor.

40.89 Mid point on S. bdy. of sec. 29.

Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground to solid rock, and in mound of stone to top, for 1/4 sec. cor., sec. 29 only, with brass cap marked



raise a mound of


DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 2 E.

Chains	Remarks
	stone, 3 ft. base, 3 ft. high, N. of cor.
52.00	Head of small draw, 290 ft. below $\frac{1}{4}$ sec. cor. of sec. 32, course SW.; ascend SE. slope.
60.00	Top of ascent, 20 ft. above draw, slopes S.; thence along a S. slope.
79.50	The cor. of secs. 31 and 32.
	Land, mountainous; rolling slopes. Soil, rocky and gravelly sandy clay; 2nd to 3rd rate. No timber. Undergrowth, medium dense sagebrush, and scattered oak and maple. Medium growth of weeds and grass. Good grazing land.
	From the cor. of secs. 25, 30, 31, and 36, on W. bdy. of Tp.
	S. 89° 23' E., along N. bdy. of sec. 31.
	Ascend gradually over rolling SE. slope, through dense undergrowth.
3.60	Small stream of clear water, course S. 30° W.
13.80	Small stream of clear water, course S. 30° W.
38.78	Proportionate dist. on S. bdy. of sec. 30.
	Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground to solid rock, and in mound of stone to top, for $\frac{1}{4}$ sec. cor., sec. 30 only, with brass cap marked
	$\frac{1}{4}$ S 30
	1941
	stone, 3 ft. base, 3 ft. high, N. of cor. raise a mound of
39.98	On rolling SE. slope, 120 ft. above sec. cor.
	The $\frac{1}{4}$ sec. cor. of sec. 31, which is a quartzite, 18x5x5 ins., marked with $\frac{1}{4}$ on N. face, firmly set in mound of stone.
	At point for cor.
	Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with the original cor. stone deposited at base, for $\frac{1}{4}$ sec. cor., sec. 31 only, with brass cap marked
	$\frac{1}{4}$ S 31
	1941
	stone, $3\frac{1}{2}$ ft. base, 3 ft. high, S. of cor. raise a mound of
	Thence
	S. 89° 31' E., along N. bdy. of sec. 31.
38.81	The closing cor. of secs. 29 and 30, which is a quartzite, 24x16x8 ins., marked with 5 notches on E., 1 notch on W., and GG on N. face, set in mound of stone.

DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 2 E.

Chains

At point for cor.
Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, with the original cor. stone deposited at base, cor closing cor. of secs. 29 and 30, with brass cap marked



1941

raise a mound of stone, 3 1/2 ft. base, 3 ft. high, N. of cor.

39.91 The cor. of secs. 31 and 32, 260 ft. above 1/4 sec. cor., sec. 31.

Land, rolling.
Soil, rocky and gravelly sandy clay; 2nd to 3rd rate.
No timber.
Undergrowth, medium dense sagebrush, and scattered oak.
Medium growth of grass and weeds. Good grazing land.

Reestablishment of surveys executed by John T. Breckon, Deputy Surveyor, in 1893.

From the closing cor. of secs. 29 and 30.

N. 2° 08' E., between secs. 29 and 30.

Ascend over rolling SW. slope, through medium dense undergrowth.

17.00 Small draw, course SW.; ascend steep S. slope.

36.00 Spur, 180 ft. above closing sec. cor., projects W.; descend N. slope, entering scattered timber, and mahogany.

39.68 On NW. slope, 40 ft. below spur.

The 1/4 sec. cor., which is a quartzite, 24x16x4 ins., marked with 1/4 on W. face, firmly set in the ground and mound of stone.

At point for cor.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with the original cor. stone deposited at base, for 1/4 sec. cor., with brass cap marked



1941

from which

A juniper, 7 ins. diam., bears S. 30° 15' E., 105 lks. dist., marked 1/4S29BT.

A juniper, 12 ins. diam., bears S. 77° W., 34 lks. dist., marked 1/4S30BT.

Thence

N. 1° 28' W., between secs. 29 and 30.

DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 2 E.

Chains

- 6.30 Small draw, 20 ft. below $\frac{1}{4}$ sec. cor., course W.; ascend over rocky S. slope.
- 26.00 Spur, 510 ft. above draw, projects W.; descend over rocky N. slope.
- 39.30 On rocky N. slope, 170 ft. below spur.

The cor. of secs. 19, 20, 29, and 30, which is a quartzite 12x12x6 ins., marked with 5 notches on E., and 2 notches on S. edge, set in mound of stone.

At point for cor.

Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground to solid rock, and in mound of stone to top, with the original cor. stone deposited at base, for cor. of secs. 19, 20, 29, and 30, with brass cap marked

T7N	R2E
S19	S20
S30	S29

1941

stone, $3\frac{1}{2}$ ft. base, 3 ft. high, W. of cor. raise a mound of

Land, mountainous; steep slopes.
 Soil; rocky sandy clay loam; 3rd rate.
 Timber, scattered juniper and Douglas fir on portion of mile.
 Undergrowth, medium dense sagebrush, and scattered oak, maple, and mountain laurel. Mohogany on portion of mile.
 Medium growth of grass and weeds. Good grazing land.

From the cor. of secs. 20, 21, 28, and 29.

N. $89^{\circ} 46'$ W., between secs. 20 and 29.

Ascend abrupt SE. slope, through scattered undergrowth.

- 7.00 Top of abrupt ascent, slopes S.; ascend over rocky SE. slope.
- 26.50 Top of ascent on spur, 570 ft. above sec. cor., slopes S. 30° W.; descend over W. slope.
- 36.00 Descent SW. slope.
- 40.37 On SW. slope, 300 ft. below spur:

The $\frac{1}{4}$ sec. cor., which is a quartzite, 12x10x7 ins., marked with 5 on E. face, firmly set in the ground and un-witnessed.

At point for cor.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with the original cor. stone deposited at base, for $\frac{1}{4}$ sec. cor., with brass cap marked

S 20
S 29

1941

raise a mound of

DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 2 E.

Chains	
	stone, 3 ft. base, 3 ft. high, N. of cor.
	Thence
	N. 89° 14' W., between secs. 20 and 29.
	Descend over rolling SW. slope.
14.60	Spur, slopes S. 60° W.; descend NW. slope, entering medium dense undergrowth, and scattered timber.
38.54	The cor. of secs. 19, 20, 29, and 30, 670 ft. below $\frac{1}{4}$ sec. cor.
	Land, mountainous; steep rocky slopes.
	Soil, rocky sandy clay loam; 3rd rate.
	Timber, scattered Douglas fir and juniper on portion of W. half mile.
	Undergrowth, medium dense oak, sagebrush, mountain laurel, and mahogany on W. portion of mile, and scattered growth on E. portion. Medium growth of grass and weeds.
	Good grazing land.
	From the cor. of secs. 19, 24, 25, and 30, on W. bdy. of Tp.
	S. 88° 32' E., between secs. 19 and 30.
	Ascend SW. slope, through medium dense undergrowth of sagebrush.
29.00	Spur, 310 ft. above sec. cor., projects S. 15° W.; descend E. slope.
38.50	Stream of clear water, 15 lks. wide, in canyon 250 ft. below spur, course S. 10° W.; dense willows and scattered aspen along stream; thence over bottom of canyon.
38.98	Proportionate dist.
	No evidence of the $\frac{1}{4}$ sec. cor. found.
	Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked
	$\frac{1}{4} \begin{array}{l} S. 19 \\ S. 30 \end{array}$
	1941 from which
	An aspen, 8 ins. diam., bears north, 15 lks. dist., marked $\frac{1}{4}$ S19BT.
	Raise a mound of stone, 3 ft. base, 3 ft. high, N. of cor.
40.60	Trail, bears N. and S.; enter dense oak brush.
41.10	Small stream of clear water in wash, course S. 60° W.; ascend rocky NW. slope.
63.00	Ascend gradually along N. slope, entering scattered timber, and undergrowth of sagebrush, oak, maple, mountain laurel, and mahogany.

DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 2 E.

Chains									
79.05	<p>The cor. of secs. 19, 20, 29, and 30, 670 ft. above canyon.</p> <p>Land, mountainous. Soil, rocky sandy clay loam; 2nd to 3rd rate. Timber, scattered Douglas fir and juniper on portion of mile. Undergrowth, sagebrush, oak, maple, mountain laurel, and mahogany. Medium growth of grass and weeds. Good grazing land.</p>								
<p>N. 1° 02' E., between secs. 19 and 20.</p>									
<p>Descend rocky N. slope, through scattered timber, and medium dense undergrowth.</p>									
12.50	<p>Draw, 280 ft. below sec. cor., course S. 80° W.; ascend S. slope.</p>								
15.10	<p>Trail, bears N. 80° E. and S. 80° W.</p>								
20.00	<p>Top of ascent, 150 ft. above draw, slopes SW.; thence along W. slope.</p>								
25.40	<p>Draw, course S. 30° W.; ascend SE. slope.</p>								
39.20	<p>Proportionate dist.; on SE. slope, 250 ft. above draw.</p> <p>No evidence of the $\frac{1}{4}$ sec. cor. found.</p> <p>Set an iron post, 3 ft. long, 1 in. diam., 24 ins. in the ground to solid rock, and in mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked.</p>								
<table border="1"> <tr> <td>$\frac{1}{4}$</td> <td></td> </tr> <tr> <td>S19</td> <td>S20</td> </tr> <tr> <td colspan="2">1941</td> </tr> </table>		$\frac{1}{4}$		S19	S20	1941			
$\frac{1}{4}$									
S19	S20								
1941									
<p>stone, $3\frac{1}{2}$ ft. base, 3 ft. high, W. of cor. raise a mound of</p>									
49.50	<p>Rocky point, 370 ft. above $\frac{1}{4}$ sec. cor., slopes SW.; ascend over rocky broken SW. slope.</p>								
57.50	<p>Top of ascent, 550 ft. above $\frac{1}{4}$ sec. cor., slopes W.; descend rocky broken NW. slope.</p>								
65.50	<p>Draw, 130 ft. below top of ascent, course S. 80° W.; ascend steep rocky S. slope.</p>								
76.00	<p>Top of ascent, 250 ft. above draw, slopes W.; thence along steep W. slope.</p>								
78.39	<p>Proportionate dist.</p> <p>No evidence of the cor. of secs. 17, 18, 19, and 20 found.</p> <p>Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 17, 18, 19, and 20, with brass cap marked</p>								
<table border="1"> <tr> <td>T7N</td> <td>R2E</td> </tr> <tr> <td>S18</td> <td>S17</td> </tr> <tr> <td>S19</td> <td>S20</td> </tr> <tr> <td colspan="2">1941</td> </tr> </table>		T7N	R2E	S18	S17	S19	S20	1941	
T7N	R2E								
S18	S17								
S19	S20								
1941									
<p>from which</p>									

DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 2 E.

Chains	
mit wo	A Douglas fir, 18 ins. diam., bears N. 54° E., 57 lks. dist., marked T7NR2ES17BT.
	A Douglas fir, 9 ins. diam., bears S. 64° 30' E., 75 lks. dist., marked T7NR2ES20BT.
e. square	A Douglas fir, 11 ins. diam., bears S. 57° 30' W., 71 lks. dist., marked T7NR2ES19BT.
	A Douglas fir, 10 ins. diam., bears N. 81° W., 80 lks. dist., marked T7NR2ES18BT.
10 . 700	<p>Land, mountainous, steep rocky slopes. Soil, rocky sandy clay loam; 3rd rate. Timber, very scattered Douglas fir and aspen. Undergrowth, oak, sagebrush, mountain laurel, and maple. Medium growth of grass and weeds. Good grazing land.</p>
	From the cor. of secs. 16, 17, 20, and 21.
	N. 86° 59' W., between secs. 17 and 20.
1000 .	Along steep S. slope, through scattered timber, and undergrowth.
30.40	Head of draw, course S.; ascend SE. slope.
35.00	Spur, 60 ft. above draw, projects S. 80° W.; thence along rolling N. slope.
40.18	On rolling N. slope.
	<p>The $\frac{1}{4}$ sec. cor., which is a quartzite, 20x16x8 ins., marked with $\frac{1}{4}$ on N. face, firmly set in the ground and in mound of stone.</p>
	At point for cor.
	Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with the original cor. stone deposited at base, for $\frac{1}{4}$ sec. cor., with brass cap marked
	$\frac{1}{4} \begin{matrix} S 17 \\ S 20 \end{matrix}$
	1941 from which
	A balsam, 12 ins. diam., bears S. 55° W., 130 lks. dist., marked $\frac{1}{4}$ S20BT.
	A Douglas fir, 15 ins. diam., bears N. 7° W., 71 lks. dist., marked $\frac{1}{4}$ S17BT.
	Thence
	S. 87° 33' W., between secs. 17 and 20.
	Entering dense aspen timber, bears N. and S.
4.00	Leave aspen timber, bears N. and S.
10.00	Ascend over rolling NE. slope.
19.00	Rocky point, and rim of mountain, bears N. 20° W., and S. 20° E.; descend over steep rocky and broken W. slope.

DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 2 E.

Chains

36.55 The cor. of secs. 17, 18, 19, and 20, 740 ft. below rim of mountain.
 Land, mountainous; steep rocky slopes.
 Soil, rocky sandy clay loam; 3rd rate.
 Timber, scattered balsam, Douglas fir, and aspen.
 Undergrowth, sagebrush, mountain laurel, oak, and maple.
 Medium growth of grass and weeds. Fair grazing land.

From the cor. of secs. 13, 18, 19, and 24, on W. bdy. of Tp.

S. 81° 45' E., between secs. 18 and 19.

Ascend steep rocky SW. slope broken by quartzite outcrops through scattered timber, and dense undergrowth.

15.00 Rim of mountain, 150 ft. above sec. cor., bears NW. and SE.; thence over rolling top.

20.00 Rim of mountain, bears S., and N. 15° E.; descend over steep rocky SE. slope.

34.00 Rocky point, slopes S.; descend over steep rocky E. slope

43.94 On steep rocky E. slope, 780 ft. below rim of mountain.

The $\frac{1}{4}$ sec. cor., which is a quartzite, 16x12x10 ins., marked with $\frac{1}{4}$ on N. face, firmly set in the ground and in mound of stone.

At point for cor.

Set an iron post, 3 ft. long, 1 in. diam., 6 ins. in the ground to solid rock, and in mound of stone to top, with the original cor. stone deposited at base, for $\frac{1}{4}$ sec. cor. with brass cap marked

$\frac{1}{4}$ $\frac{S 18}{S 19}$

1941

from which

A balsam, 6 ins. diam., bears N. 28° 30' E., 124 lks. dist., marked $\frac{1}{4}$ S18BT.

A balsam, 6 ins. diam., bears S. 59° 30' E., 148 lks. dist., marked $\frac{1}{4}$ S19BT.

Thence

N. 87° 38' E., between secs. 18 and 19.

8.80 Stream of clear water, 6 lks. wide, in canyon 180 ft. below $\frac{1}{4}$ sec. cor., course S. 10° W.; ascend steep rocky W. slope.

10.25 Trail, bears N. 10° E., and S. 10° W.

36.53 The cor. of secs. 17, 18, 19, and 20, 780 ft. above canyon

Land, mountainous; steep rocky slopes.
 Soil, rocky sandy clay loam; 3rd to 4th rate.
 Timber, scattered Douglas fir and balsam.
 Undergrowth, oak, maple, sagebrush, and mountain laurel.
 Fair grazing land.

DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 2 E.

Chains

N. 3° 21' W., between secs. 17 and 18.

Ascend over steep SW. slope broken by quartzite outcrops, through scattered timber, and medium dense undergrowth.


14.00 Top of ascent, 360 ft. above sec. cor., slopes W.; thence along steep rocky W. slope.

28.00 Descend over steep NW. slope, leaving timber.

39.26 Proportionate dist.; on rocky NW. slope, 470 ft. below top of ascent.

No evidence of the $\frac{1}{4}$ sec. cor. found.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked



stone, 3 ft. base, 3 ft. high, W. of cor. raise a mound of

43.80 Stream of clear water, 6 lks. wide, in canyon 120 ft. below $\frac{1}{4}$ sec. cor., course S. 70° W.; ascend steep S. slope broken by quartzite ledges; enter scattered undergrowth.

44.40 Trail, bears N. 80° E., and S. 80° W.

55.00 Top of ledges, 200 ft. high, bears E. and W.; ascend over SE. slope.


62.00 Spur, slopes SW.; ascend over SW. slope, entering medium dense scrub aspen.

78.52 On SW. slope, 620 ft. above canyon.

The cor. of secs. 7, 8, 17, and 18, which is a sandstone, 16x12x8 ins., marked with 5 notches on E., and 4 notches on S. edge, firmly set in the ground and mound of stone.

At point for cor.

Set an iron post, 3 ft. long, 2 ins. diam., 18 ins. in the ground to solid rock, and in mound of stone to top, with the original cor. stone deposited at base, for cor. of secs. 7, 8, 17, and 18, with brass cap marked



1941 from which

An aspen, 6 ins. diam., bears N. 63° E., 51 lks. dist., marked T7NR2ES8BT.

An aspen, 6 ins. diam., bears S. 86° 15' E., 92 lks. dist., marked T7NR2ES17BT.

An aspen, 6 ins. diam., bears S. 23° 30' W., 21 lks. dist., marked T7NR2ES18BT.

An aspen, 5 ins. diam., bears N. 74° 30' W., 46 lks. dist., marked T7NR2ES7BT.

DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 2 E.

Chains

261433

From this sec. cor., a small spring of clear water, with trough, bears S. 26° W., 6.70 chs. dist.

Land, mountainous.

Soil, rocky sandy clay loam; 3rd to 4th rate.

Timber, scattered Douglas fir, balsam, and aspen on portions of mile.

Undergrowth, sagebrush, oak, mountain laurel, mahogany, and honeysuckle. Medium growth of grass and weeds.

Good grazing land.

From the cor. of secs. 8, 9, 16, and 17.

N. 89° 18' W., between secs. 8 and 17.

Descend over gently rolling SW. slope, through medium dense undergrowth.

20.00 Rim of draw, bears N. and S.; descend over W. slope, entering medium dense timber.

31.50 Draw, 230 ft. below sec. cor., course S. 15° W.; ascend over SE. slope.

38.50 Rim of draw, 70 ft. above bottom, bears N. and S.; thence over rolling S. slope.

40.49 The $\frac{1}{4}$ sec. cor., which is a quartzite, 12x10x6 ins., marked with $\frac{1}{4}$ on N. face, firmly set in the ground and unwitnessed.

At point for cor.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with the original cor. stone deposited at base, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$ S 8
S 17

1941

from which

An aspen, 8 ins. diam., bears south, 43 lks. dist., marked $\frac{1}{4}$ S17BT.

An aspen, 10 ins. diam., bears N. 64° 15' W., 40 lks. dist., marked $\frac{1}{4}$ S8BT.

Thence

S. 89° 38' W., between secs. 8 and 17.

41.32 The cor. of secs. 7, 8, 17, and 18.

Land, rolling mountains.

Soil, rocky sandy clay loam; 2nd to 3rd rate.

Timber, aspen and scattered Douglas fir and balsam.

Undergrowth, sagebrush and honeysuckle. Medium growth of grass and weeds. Good grazing land.

From the cor. of secs. 7, 12, 13, and 18, on W. bdy. of Tp.

S. 84° 21' E., between secs. 7 and 18.

DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 2 E.


Chains

Ascend over NW. slope, through scattered timber, and dense undergrowth.

20.00 Ridge, 100 ft. above sec. cor., bears NE., and SW.; descend over E. slope.

36.13 Proportionate dist., on E. slope, 200 ft. below ridge.
No evidence of the $\frac{1}{4}$ sec. cor. found.

Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground to solid rock, and in mound of stone to top, with a limestone, 10x7x5 ins., marked X, deposited at base, for $\frac{1}{4}$ sec. cor., with brass cap marked



1944

47.50 Draw, 70 ft. below $\frac{1}{4}$ sec. cor., course S.; ascend over SW. slope.

62.00 Enter dense scrub aspen timber, bears N. and S.

75.50 The cor. of secs. 7, 8, 17, and 18, 250 ft. above draw.

Land, mountainous; rolling slopes.
Soil, rocky sandy clay loam; 2nd to 3rd rate.
Timber, aspen and scattered Douglas fir and balsam.
Undergrowth, sagebrush and honeysuckle. Medium growth of grass and weeds. Good grazing land.

N. 1° 27' E., between secs. 7 and 8.

Ascend over rolling SW. slope, through dense scrub aspen timber, and medium dense undergrowth.

28.00 Ridge, 250 ft. above sec. cor., bears E. and W.; descend over N. slope, entering medium dense fir and aspen timber.


40.37 On N. slope, 160 ft. below ridge.

The $\frac{1}{4}$ sec. cor., which is a dead aspen tree, 12 ins. diam., lying on the ground, marked $\frac{1}{4}$ S, from which

A dead aspen, 10 ins. diam., bears N. 14° W., 25 lks. dist., marked $\frac{1}{4}$ SBT.

At point for cor.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked



1941

from which

A balsam, 7 ins. diam., bears S. 82° 30' E., 49 lks. dist., marked $\frac{1}{4}$ S8BT.

A balsam, 6 ins. diam., bears N. 34° W., 32 lks. dist., marked $\frac{1}{4}$ S7BT.

DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 2 E.

Chains

Thence

N. 3° 48' W., between secs. 7 and 8.

18.60 Stream of clear water, 6 lks. wide, in canyon, 320 ft. below $\frac{1}{4}$ sec. cor., course S. 75° W.; ascend S. slope, leaving fir timber.

37.00 Enter scattered clumps of aspen.

39.57 On S. slope, 400 ft. above canyon.

The cor. of secs. 5, 6, 7, and 8, which is a quartzite, 24x12x8 ins., marked with 5 notches on E. and S. edges, firmly set in the ground and mound of stone.

At point for cor.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, with the original cor. stone deposited at base, for cor. of secs. 5, 6, 7, and 8, with brass cap marked

T7N	R2E
S 6	S 5
S 7	S 8

1941

stone, $3\frac{1}{2}$ ft. base, 3 ft. high, W. of cor. raise a mound of

Land, mountainous.
 Soil, rocky sandy clay loam; 2nd rate.
 Timber, aspen, Douglas fir, and balsam.
 Undergrowth, sagebrush, honeysuckle, and choke cherry.
 Medium growth of grass and weeds. Good grazing land.

From the cor. of secs. 4, 5, 8, and 9.

S. 87° 21' W., between secs. 5 and 8.

Ascend over rolling SE. slope, through dense undergrowth and scattered aspen timber.

22.00 Top of ascent on S. slope on ridge, 100 ft. above sec. cor., bears S. 30° E., and N. 30° W.; descend over SW. slope.

41.16 Proportionate dist.; on SW. slope, 120 ft. below ridge.

No evidence of the $\frac{1}{4}$ sec. cor. found.

Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground to solid rock, and in mound of stone to top, with a limestone, 5x5x4 ins., marked X, deposited at base, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$	S 5
	S 8

1944

55.00 Draw, 230 ft. below $\frac{1}{4}$ sec. cor., course S.; thence along S. slope.

82.32 The cor. of secs. 5, 6, 7, and 8.

DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 2 E.

Chains

Land, mountainous; rolling slopes.
 Soil, rocky sandy clay loam; 2nd rate.
 Timber, scattered clumps of aspen.
 Undergrowth, sagebrush, honeysuckle, and choke cherry.
 Medium growth of grass and weeds. Good grazing land.

From the cor. of secs. 1, 6, 7, and 12, on W. bdy. of Tp.
 S. 75° 54' E., between secs. 6 and 7.

Ascend W. slope, through medium dense aspen timber, and medium dense undergrowth.

5.00 Spur, 70 ft. above sec. cor., slopes SW.; ascend SW. slope, entering scattered fir timber.

33.27 On SW. slope, 330 ft. above sec. cor.

The $\frac{1}{4}$ sec. cor., which is a limestone, 16x10x8 ins., marked with $\frac{1}{4}$ on N. face, loosely set in mound of stone.

At point for cor.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with the original cor. stone deposited at base, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$ $\frac{S 6}{S 7}$

1941

from which

A Douglas fir, 30 ins. diam., bears S. 76° 30' E., 205 lks. dist., marked $\frac{1}{4}$ S7BT.

A Douglas fir, 36 ins. diam., bears N. 25° W., 149 lks. dist., marked $\frac{1}{4}$ S6BT.

Thence

S. 89° 16' E., between secs. 6 and 7.

5.00 Rocky point, 20 ft. above $\frac{1}{4}$ sec. cor., slopes S. 15° W.; thence along steep S. slope.

24.00 Descend over SE. slope.

36.00 Foot of descent; thence along S. slope.

40.86 The cor. of secs. 5, 6, 7, and 8, 150 ft. below rocky point.

Land, mountainous.
 Soil, rocky sandy clay loam; 2nd to 3rd rate.
 Timber, aspen, balsam, and Douglas fir.
 Undergrowth, sagebrush, honeysuckle, and scattered mountain laurel and young aspen. Medium growth of grass and weeds.
 Good grazing land.

N. 0° 58' E. between secs. 5 and 6.

Ascend over S. slope, through scattered clumps of aspen, and dense undergrowth.

DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 2 E.


Chains

chains

- 11.00 Leave timber, bears E. and W.;
- 23.00 Enter medium dense fir timber, bears E. and W.;
- 24.50 Narrow rocky ridge, 430 ft. above sec. cor., bears N. 80° E., and S. 80° W.; descend over steep N. slope.
- 32.00 Small draw, course NE.; descend over NE. slope, entering scattered fir timber.
- 44.19 Proportionate dist.; on NE. slope, 270 ft. below ridge.


No evidence of the 1/4 sec. cor. found.

Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground to solid rock, and in mound of stone to top, with a sandstone, 5x5x5 ins., marked X, deposited at base, for 1/4 sec. cor., with brass cap marked



- 47.00 Enter dense aspen timber, bears E. and W.
 - 78.00 Leave aspen timber, bears E. and W.
 - 84.67 At proportionate dist. along S. bdy. of T. 8 N., R. 2 E.
- No evidence of the closing cor. of secs. 5 and 6 found.

Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground to solid rock, and in mound of stone to top, with a limestone, 4x4x4 ins., marked X, deposited at base, for closing cor. of secs. 5 and 6, with brass cap marked




1944

From this closing sec. cor.; the cor. of secs. 31 and 32, bears S. 89° 45' E., 3.36 chs. dist.

At mid point on N. bdy. of sec. 5.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/4 sec. cor., sec. 5 only, with brass cap marked



from which

An aspen, 8 ins. diam., bears S. 24° 30' E., 151 lks. dist., marked 1/4 S5BT.

A balsam, 8 ins. diam., bears S. 51° 45' W., 114 lks. dist., marked 1/4 S5BT.

From this 1/4 sec. cor., the 1/4 sec. cor. of sec. 32, bears S. 89° 26' E., 4.09 chs. dist.

At proportionate dist., on N. bdy. of sec. 6.

DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 2 E.

Chains

Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground to solid rock, and in mound of stone to top, with a limestone, 5x5x3 ins., marked X, deposited at base, for $\frac{1}{4}$ sec. cor., sec. 6 only, with brass cap marked

$\frac{1}{4}$ S. 6

1944

From this $\frac{1}{4}$ sec. cor., the $\frac{1}{4}$ sec. cor. of sec. 31, bears S. 89° 45' E., 3.36 chs. dist.

Land, mountainous.

Soil, rocky sandy clay loam; 2nd to 3rd rate.

Timber, aspen, Douglas fir, and balsam.

Undergrowth, sagebrush, honeysuckle, and choke cherry.

Medium growth of grass and weeds. Good grazing land.

GENERAL DESCRIPTION, T. 7 N., R. 2 E.

T. 7 N., R. 2 E., is mountainous in character, varying in elevation above sea level from about 5, 500 ft. in the southwest corner to about 8, 500 ft. on the ridges and spurs in the north and east portions. Throughout the east half and southeast corner of the township, the slopes of the canyons and draws are steep and rocky, and are broken by quartzite outcroppings near the tops of the ridges and spurs. The drainage of the east half of the township is formed by the Middle Fork of the Ogden River and tributaries, and is in a southerly and southwesterly direction. The drainage of the west half, formed by canyons and draws, is westerly and southwesterly.

The soil of the slopes of the canyons and draws is a sandy clay loam, and very rocky, in places being covered with slide-rock, and may be classed from 3rd to 4th rate. The soil of the rolling mountain top in the northwest corner is a sandy clay loam, containing considerable rock, and may be classed from 2nd to 3rd rate. On the slopes of the canyons and draws of the east half and southwest corner, the soil supports from a scattered to dense growth of oak, sagebrush, and scattered maple and mahogany brush. Through the northwest corner on the ridges, the soil supports a medium growth of sagebrush, choke cherry, and honeysuckle brush.

The township is well watered by streams of the Middle Fork of the Ogden River, and tributaries, and of canyons and draws. The Middle Fork of the Ogden River, a stream of clear water about 20 links wide, enters the township in the northeast quarter of section 1, and flows southerly and southwesterly, through sections 1, 12, 11, 14, 23, 22, 27, 28, 33 & 32, leaving the township in the southwest quarter of section 32. A tributary of Middle Fork of the Ogden River, a stream of clear water about 10 links wide, enters the township in the northwest quarter of section 2, and flows southerly in canyon, through sections 2 and 11, to junction in section 14. A tributary of the Middle Fork of the Ogden River, a stream of clear water about 6 links wide, heads in section 9, and flows southeasterly in canyon, through sections 9, 10, and 11, to junction in section 14. A tributary of the Middle Fork of the Ogden River, a stream of clear water about 6 links wide, enters the township in the northwest quarter of section 1, and flows southeasterly to junction in southeast quarter of section 1. A small stream of clear water, a tributary of

Chains

enlarged

of the Middle Fork of the Ogden River, heads in section 23, and flows westerly through sections 23 and 22, to junction in southeast quarter of section 22. A stream of clear water about 10 links wide, heads in section 16, and flows westerly in canyon, through sections 16, 17, into section 18, thence southerly through sections 18, 19, and 30, leaving the township in southwest quarter of section 30. A stream of clear water about 6 links wide, heads in section 8, and flows westerly through sections 8 and 7, leaving the township in the southwest quarter of section

A portion of the south half of section 31 is under cultivation. No other portion of the township is suitable for cultivation. The predominating interest is stock grazing, as there is a good growth of native grass, weeds and brush over most of the township which affords good feed.

On the ridges through the north half and the southeast corner is found from a scattered to dense growth of aspen and scattered Douglas fir and balsam timber.

An unimproved road enters the township at the corner of sections 5, 6, 31, and 32, on the south boundary, and extends easterly through section 32, and to about the center of section 33. There are a number of trails through the township, making most parts accessible.

No indications of valuable minerals, oil, oil shale, or coal were found.

The mean magnetic declination was found to be 18° E.

CERTIFICATE OF UNITED STATES SURVEYOR

I, Wilson McConkie, HEREBY CERTIFY upon honor the
pursuance of special instructions bearing date of the 19th day of October, 1941
received from the district cadastral engineer for Utah, with assign
instructions dated May 8, 1941, I have ~~surveyed~~ independently resurveyed
portion of the east boundary of T. 7 N., R. 1 E., portion of the
boundary of T. 8 N., R. 2 E., and the east boundary, and portion of
the south boundary and subdivisional lines of T. 7 N., R. 2 E.,
of the Salt Lake Meridian, in the State of Utah, which
represented in the foregoing field notes as having been executed by me and under my direction; and that
survey has been made in strict conformity with said instructions, the Manual of Instructions for the Sur
of the Public Lands of the United States, and in the specific manner described in the foregoing field notes
Salt Lake City, Utah
March 7, 1942.

Wilson McConkie
Assistant Cadastral Engineer

~~CERTIFICATE OF APPROVAL~~

~~OFFICE OF U.S. SUPERVISOR OF SURVEYS,
_____, 19____~~

~~The foregoing field notes of the survey of _____~~

~~executed by _____
under special instructions dated _____, and assignme
instructions dated _____, having been critically examined, an
the necessary corrections made prior to their certification by the engineer, the said field notes, and the surve
therein described, are hereby approved.~~

~~_____
U.S. Supervisor of Surveys.~~

CERTIFICATE OF TRANSCRIPT

I CERTIFY that the foregoing transcript of the field notes of the above-described surveys in _____
_____, is a true copy of the original field notes on file in the public survey office.

U.S. Supervisor of Surveys.

CERTIFICATE OF SURVEYOR

I, Robert C. Yundt, HEREBY CERTIFY upon honor the
pursuance of special instructions bearing date of the 19th day of October 1944
received from the district cadastral engineer for Utah, with supplemental, with assigned
instructions dated June 17, 1944, I have ~~surveyed~~ independently resurveyed
portion of the south boundary of T. 8 N., R. 2 E., portion of the
boundary of T. 7 N., R. 1 E., and portion of the subdivisional lines
of T. 7 N., R. 2 E.,
of the Salt Lake Meridian, in the State of Utah, which
represented in the foregoing field notes as having been executed by me and under my direction; and that
survey has been made in strict conformity with said instructions, the Manual of Instructions for the Survey
of the Public Lands of the United States, and in the specific manner described in the foregoing field notes
Salt Lake City, Utah
November 14, 1944
Robert C. Yundt
Associate Cadastral Engineer

CERTIFICATE OF APPROVAL

OFFICE OF SUPERVISOR OF SURVEYS,

19

The foregoing field notes of the survey of

executed by
under special instructions dated , and assigned
instructions dated , having been critically examined, and
the necessary corrections made prior to their certification by the engineer, the said field notes, and the surveys
therein described, are hereby approved.

Supervisor of Surveys.

CERTIFICATE OF TRANSCRIPT

I CERTIFY that the foregoing transcript of the field notes of the above-described surveys in
is a true copy of the original field notes on file in the public survey office.

Supervisor of Surveys.

CERTIFICATE OF SURVEYOR

I, Ralph Gentry, HEREBY CERTIFY upon honor that
pursuance of special instructions bearing date of the 19th day of October 1939
received from the district cadastral engineer for Utah, with assignment
instructions dated May 8, 1941 and ~~xxxxxxx~~ supplemental assignment
instructions dated June 17, 1944, I have dependently resurveyed port
the east boundary of T. 7 N., R. 1 E., and portion of the south bound
and subdivisional lines of T. 7 N., R. 2 E.,
of the Salt Lake Meridian, in the State of Utah, which are
represented in the foregoing field notes as having been executed by me and under my direction; and that said
survey has been made in strict conformity with said instructions, the Manual of Instructions for the Survey
of the Public Lands of the United States, and in the specific manner described in the foregoing field notes.
Salt Lake City, Utah, Ralph Gentry
November 14, 1944 Cadastral Engineer

CERTIFICATE OF APPROVAL

Chief Cadastral Engineer,
OFFICE OF ~~XXXXXXXXXXXXXXXXXXXX~~
Denver, Colo., April 24, 1947

The foregoing field notes of the ~~survey~~ dependent resurvey of the east boundary
of T. 7 N., R. 1 E., the south boundary of T. 8 N., R. 2 E., and of the
south and east boundaries, and subdivisional lines of T. 7 N., R. 2 E.
executed by Ralph Gentry, Cadastral Engineer, Robert C. Yundt, Associa
~~XXXXXXXXXX~~ Cadastral Engineer, and Wilson McConkie, Assistant Cadastral,
Engineer
under special instructions dated October 19, 1939, and assignment
instructions dated May 8, 1941, and supplemental assignment
instructions dated June 17, 1944, having been critically examined, and
the necessary corrections made prior to their certification by the engineer, the said field notes, and the survey
therein described, are hereby approved.

[Signature]
~~Supervisor of Surveys~~
Acting Chief Cadastral Engineer

CERTIFICATE OF TRANSCRIPT

I CERTIFY that the foregoing transcript of the field notes of the above-described surveys in
....., is a true copy of the original field notes on file in the public survey office.

Supervisor of Surveys.

79
1280

101

ORIGINAL
 UNITED STATES
 DEPARTMENT OF THE INTERIOR
 GENERAL LAND OFFICE
 BUREAU OF LAND MANAGEMENT
 B

FIELD NOTES

DEPENDENT RESURVEY OF

THE NORTH BOUNDARY OF T. 6 N., R. 3 E., THE WEST BOUNDARY

OF T. 7 N., R. 4 E., THE SOUTH BOUNDARY OF T. 8 N., R. 3 E.,

AND OF THE

SUBDIVISIONAL LINES

OF

T. 7 N., R. 3 E.,

Of the Salt Lake Meridian,

the State of Utah

EXECUTED BY

Alph Gentry, Cadastral Engineer, Robert C. Yundt, Associate

Cadastral Engineer, J. C. Clark, Assistant Cadastral Engineer,

and Wilson McConkie, Assistant Cadastral Engineer.

Under special instructions dated October 19, 1939, which provided

the surveys included under Group No. 306, bearing the approval of the

Commissioner of the General Land Office under date of Jan. 3, 1940

assignment instructions dated May 8, 1941, and ~~19~~ supplemental

assignment instructions dated June 17, 1944.

Survey commenced May 19, 1941

Survey completed August 22, 1944

INDEX DIAGRAM.

Township 7 North, Range 3 East

	14	15	16	17	18	19						
75	6	75	5	57	4	47	3	38	2	28	1	8
	73		73		57		46		37		27	
74	7	71	8	56	9	45	10	36	11	26	12	9
	70		59		55		45		36		26	
71	18	68	17	54	16	44	15	34	14	25	18	10
	66		66		53		43		34		24	
68	19	65	20	52	21	42	22	33	23	23	24	11
	63		63		51		42		32		22	
64	30	62	29	50	28	41	27	31	26	22	25	12
	60		60		49		40		30		21	
62	31	58	32	48	38	39	34	29	35	20	36	13
	7		6		5		4		3		2	

DEPENDENT RESURVEY OF T. 7 N., R. 3 E., SALT LAKE MERIDIAN

The official survey of T. 7 N., R. 3 E., Salt Lake Meridian is shown upon the township plat approved May 7, 1898. The following field notes are those of a dependent resurvey or reestablishment of the south, east, and north boundaries and of the subdivisional lines of the township.

Before reconstructing or restoring the corners, the lines of the original survey were retraced, and search was made for evidence of the original corner monuments, and other calls of the field notes. When duly identified or restored, the corner positions were remonumented.

The rules of proportionate measurement were applied in order to ascertain the position of each lost corner, after completing the necessary retracements to connect with the identified corner locations; but not until exhausting every reasonable possibility of finding direct evidence for the control of each particular corner.

In order to simplify the record, the true line notes only are supplied here, which refer to the completed resurvey.

Survey commenced June 23, 1944, and executed with Buff and Buff transits Nos. 9302, 9797, and 14191 used by Ralph Gentry, Cadastral Engineer, Robert C. Yundt, Associate Cadastral Engineer, and J. C. Clark, Assistant Cadastral Engineer, respectively. The instruments are the property of the General Land Office, and are equipped with the Smith solar attachment and full vertical circles. The horizontal limbs are provided with two double verniers placed opposite to each other, and read to single minutes of arc, which is also the least count of the verniers of the vertical circles, and of the latitude and declination arcs. The instruments were approved for use on this survey by the District Cadastral Engineer for Utah, conditional upon satisfactory field tests. The instruments were in good condition at the commencement of this survey, and were tested and found free from any appreciable error.

The directions of the lines were determined by the solar transit method. The measurements were made with Lallie steel tapes, 5 and 8 chains in length, graduated every link for the first 100 links, and thereafter at intervals of 10 links. The tapes were tested by comparison with a Lufkin standard steel tape one chain in length, and found correct. The measurements were made on the slope, and the vertical angle of each interval was ascertained by clinometers in good adjustment; the horizontal equivalents are entered in the field note record.

The approximate geographic position of the SE. cor. of the township, as determined through ties of the public land surveys to triangulation stations of U. S. Coast and Geodetic Survey located in T. 8 N., R. 2 E. and in T. 7 N., R. 1 W., is as follows: latitude $41^{\circ} 17.5' N.$, longitude $111^{\circ} 33' W.$

June 23, 1944, at camp located in the $SE\frac{1}{4}$ of sec. 16, T. 7 N., R. 3 E., approximate latitude $41^{\circ} 20' N.$, longitude $111^{\circ} 37' W.$, at 4h 46m 38s a. m., by my watch which carries correct 105th meridian time as determined by radio signals, or 4h 20m 10s a. m., l. m. t., I make an hour angle observation on Polaris, east of the meridian, two each with the telescope in direct and reversed positions, reading the horizontal deflection angle from Polaris, west to a well defined reference point on spur about one half mile north.

DEPENDENT RESURVEY OF T. 7 N., R. 3 E., SALT LAKE MERIDIAN

Chains

Mean deflection angle, Polaris west to reference point	1° 04'
Azimuth of Polaris	1° 02'
True bearing of reference point	N. 0° 02' W.
Observed magnetic declination	N. 18° 00' E.

Every hour from 7:30 to 10:30 a. m., and from 1:30 to 5:30 p. m., we make proper settings on the arcs of the solar attachment of each instrument and ascertain that the resulting orientations of the instruments, when compared with the meridian established by Polaris observations have a maximum error of less than 1' 30",

Conditions permitting, the arcs were tested daily by noon observations, and the meridional indications of the solar attachments verified at frequent intervals throughout this survey.

DEPENDENT RESURVEY OF NORTH BOUNDARY OF T. 6 N., R. 3 E.

Reestablishment of surveys executed by Baxter and Blossom, Deputy Surveyors, in 1899

Commence at the cor. of Tps. 6 and 7 N., Rs. 3 and 4 E., which is a limestone, 22x9x9 ins., firmly set in the ground and in a mound of stone, and marked 6 grooves on N. E., S. and W. faces.

At point for cor.

Set an iron post, 3 ft. long, 3 ins. diam., 20 ins. in the ground to solid rock, and in a mound of stone to top, with the original stone deposited at base, for cor. of Tps. 6 and 7 N., Rs. 3 and 4 E., with brass cap marked

T7N	
R3E	R4E
S36	S31
S1 S6	
T6N	
1944	

Thence,

N. 89° 44' W., between secs. 1 and 36.

Descend SW. slope over mountainous land, through medium dense undergrowth.

40.21 On SW. slope, 650 ft. below Tp. cor.

The $\frac{1}{4}$ sec. cor., which is a limestone, 11x10x8 ins., firmly set in the ground and in a mound of stone, and marked $\frac{1}{4}$ on N. face.

At point for cor.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with the original stone deposited at the base, for $\frac{1}{4}$ sec. cor., with brass cap marked

S 36	
$\frac{1}{4}$	S 1
1944	

DEPENDENT RESURVEY OF NORTH BOUNDARY OF T. 6 N., R. 3 E.

Chains

Thence

S. 89° 55' W., between secs. 1 and 36.

Ascend along S. to SE. slope.

14.00 Top of ascent, 50 ft. above 1/4 sec. cor., slopes S.; descend over SW. slope.

26.00 Spur, 130 ft. below 1/4 sec. cor., slopes S. 75° W.; descend along N. to NW. slope.

40.08 On N. slope, 400 ft. below 1/4 sec. cor.

The cor. of secs. 1, 2, 35, and 36, which is a quartzite, 12x7x7 ins., marked with 1 notch on E., and 5 notches on W. edge, firmly set and witnessed by a small mound of stone to the W.

At point for cor.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, with the original cor. stone deposited at base, for cor. of secs. 1, 2, 35, and 36, with brass cap marked

T7N R3E
S35 | S36
S 2 | S 1
. T6N
1944

raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Land, mountainous.

Soil, rocky sandy clay loam; 3rd to 4th rate.

No timber.

Undergrowth, oak, maple, honeysuckle, sagebrush, and scattered mahogany. Medium growth of grass and weeds. Good grazing land.

N. 89° 51' W., between secs. 2 and 35.

Descend over NW. slope, through dense undergrowth.

11.30 Stream of clear water, 10 lks. wide, in canyon, 400 ft. below sec. cor., course N. 15° W.; ascend steep NE. slope.

27.50 Spur, 425 ft. above canyon, slopes N.; descend NW. slope.

32.00 Draw, 60 ft. below spur, course NE.; ascend over E. slope.

33.80 Trail, bears NW., and S. 1 chain dist., thence E.

40.04 On E. slope, 260 ft. above draw.

The 1/4 sec. cor., which is a quartzite, 17x12x10 ins., marked with 1/4 on N. face, and witnessed by a mound of stone, 3 ft. base, 2 ft. high, to the N.

At point for cor.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with the original cor. stone deposited at base, for 1/4 sec. cor., with brass cap marked

S 35
1/4 S 2
1944

Thence

DEPENDENT RESURVEY OF NORTH BOUNDARY OF T. 6 N., R. 3 E.

Chains

S. 89° 59' W., between secs. 2 and 35.

11.00 Spur, 400 ft. above $\frac{1}{4}$ sec. cor., slopes N.; descend steep W. slope.

39.83 On E. side of bottom of Skull Creek canyon, 675 ft. below spur.

The cor. of secs. 2, 3, 34, and 35, which is a quartite 16x10x9 ins., marked with 2 notches on E., and 4 notches on W. edge, firmly set and witnessed by a mound of stone 3 ft. base, 2 ft. high, to the W.

At point for cor.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, with the original cor. stone deposited at base, $\frac{1}{4}$ sec. cor. of secs. 2, 3, 34, and 35, with brass cap marked

T7N R3E
S34 | S35
S 3 | S 2
T6N

1944

from which

A cottonwood, 18 ins. diam., bears N. 43° W., 53 lks. dist., marked T7NR3ES34BT.

Land, mountainous; steep slopes.

Soil, rocky sandy clay loam; 3rd to 4th rate.

No timber.

Undergrowth, dense oak, service berry, honeysuckle, and sagebrush. Medium growth of grass and weeds.

Good grazing land.

N. 89° 55' W., between secs. 3 and 34.

Over mountainous land, through dense undergrowth.

1.50 Skull Creek, stream of clear water, 8 lks. wide, in canyon course N. 15° W.; ascend over steep E. slope.

4.50 Old road, bears N. 15° W., and S. 15° E.

17.30 Point of spur, 600 ft. above sec. cor., slopes N.; descend over steep W. slope.

35.00 Draw, 625 ft. below spur, course N.; thence along steep W. slope.

40.19 Proportionate dist., on steep N. slope. No evidence of $\frac{1}{4}$ sec. cor. found.

Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground to solid rock, and in a mound of stone to top, with a limestone, 7x7x5 ins., marked X, deposited at base, $\frac{1}{4}$ sec. cor., with brass cap marked

S 34
S 3

1944

DEPENDENT RESURVEY OF NORTH BOUNDARY OF T. 6 N., R. 3 E.

Chains

40.70 Barbed wire fence, bears N., and S., 25 lks. dist. to cor., thence E.

41.60 Draw, course N. 15° E.; ascend steep E. slope.

52.00 Top of ascent on point of spur, 460 ft. above 1/4 sec. cor., slopes N.; thence along steep rocky N. slope.

64.00 West side of N. face of spur, slopes N.; descend steep W. slope.

74.00 Draw, 390 ft. below point of spur, course N. 10° E.; ascend steep E. slope.

80.38 Proportionate dist., on steep E. slope, 170 ft. above draw. No evidence of cor. of secs. 3, 4, 33, and 34 found.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for the cor. of secs. 3, 4, 33, and 34, with brass cap marked

T7N R3E
S33 | S34
S 4 | S 3
T6N

1944

raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Land, mountainous; steep slopes.
Soil, rocky sandy clay loam; 3rd to 4th rate.
No timber.
Undergrowth, dense oak, service berry, and sagebrush.
Medium growth of grass and weeds. Good grazing land.

N. 89° 55' W., between secs. 4 and 33.

Ascend steep E. slope through dense undergrowth.

7.00 Spur, 60 ft. above sec. cor., slopes N.; descend NW. slope.

18.00 Draw, 120 ft. below spur, course N.; ascend NE. slope.

32.00 Point of spur, 110 ft. above draw, slopes N.; thence along rocky N. slope.

40.19 Proportionate dist.; no evidence of 1/4 sec. cor. found.

Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground to solid rock, and in a mound of stone to top, with a sandstone, 8x7x4 ins., marked X, deposited at base, for 1/4 sec. cor., with brass cap marked

S 33
S 4

1944

Descend along steep rocky NW. slope.

62.50 Mouth of draw from the S., 400 ft. below 1/4 sec. cor.; enter bottom land of the South Fork of Ogden River, bears N. 60° E., and S. 60° W.

70.50 Left bank of South Fork of Ogden River, course W., from

DEPENDENT RESURVEY OF NORTH BOUNDARY OF T. 6 N., R. 3 E.

Chains	N. 75° E.; thence along river bed.								
78.00	Left bank of South Fork of Ogden River, bears N. 60° W. from E.; thence over bottom land leaving river bed.								
80.38	The cor. of secs. 4, 5, 32, and 33, which is a quartzite 13x10x9 ins., marked with 4 notches on E., and 2 notches on W. edge, firmly set and witnessed by a mound of stone to the N. At point for cor. Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, with the original cor. stone deposited at base, for cor. of secs. 4, 5, 32, and 33, with brass cap marked <table style="margin-left: auto; margin-right: auto;"> <tr><td>T7N</td><td>R3E</td></tr> <tr><td>S32</td><td>S33</td></tr> <tr><td>S 5</td><td>S 4</td></tr> <tr><td colspan="2">T6N</td></tr> </table> 1944 raise a mound of stone, 3 ft. base, 2 ft. high W. of cor. Cor. stands in barbed wire fence line, bears N. and S. Land, mountainous and nearly level bottom. Soil, sandy and clay loam; rocky on slopes; 2nd to 4th rate. Timber, scattered cottonwood along river bottom land. Undergrowth, dense oak, service berry and sagebrush on slopes; dense willows along bottom land. Medium growth of weeds and grass. Good grazing land.	T7N	R3E	S32	S33	S 5	S 4	T6N	
T7N	R3E								
S32	S33								
S 5	S 4								
T6N									
	N. 89° 56' W., between secs. 5 and 32. Over nearly level bottom land, through scattered to dense undergrowth, and scattered timber.								
20.00	South Fork of Ogden River, stream of clear water, 60 lks. wide, course S. 75° W.								
39.78	Proportionate dist., in dense willows. No evidence of the $\frac{1}{4}$ sec. cor. found. Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked <table style="margin-left: auto; margin-right: auto;"> <tr><td>S 32</td></tr> <tr><td>$\frac{1}{4}$</td></tr> <tr><td>S. 5</td></tr> </table> 1944	S 32	$\frac{1}{4}$	S. 5					
S 32									
$\frac{1}{4}$									
S. 5									
44.50	Leave willows; enter medium dense sagebrush, bears N. 60° and S. 60° W.; leave bottom land; ascend gentle SE. to S. slope.								
48.70	Oiled highway, bears N. 62° 15' E., and S. 62° 15' W.								
52.30	Corner of barbed wire fence, bears W., and parallel to road.								
60.00	Small draw, course S.								
65.80	Small draw, course S.								

DEPENDENT RESURVEY OF NORTH BOUNDARY OF T. 6 N., R. 3 E.

<p>Chains</p> <p>70.60</p> <p>77.90</p> <p>79.56</p> <p>86.00</p> <p>100.00</p> <p>33.00</p> <p>40.11</p>	<p>Small; draw, course S.</p> <p>Bend in fence, bears E., and S. 62° 10' W..</p> <p>On gentle S. slope, 180 ft. above $\frac{1}{4}$ sec. cor.</p> <p>The cor. of secs. 5, 6, 31, and 32, which is a brown quartzite, 17x12x6 ins., marked with 5 notches on E., and 1 notch on W. edge, firmly set and witnessed by a mound of stone, 3 ft. base, 2 ft. high to the W.</p> <p>At point for cor.</p> <p>Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, with the original cor. stone deposited at base, for cor. of secs. 5, 6, 31, and 32, with brass cap marked</p> <div style="text-align: center;"> <table border="1"> <tr><td>T7N</td><td>R3E</td></tr> <tr><td>S31</td><td>S32</td></tr> <tr><td>S 6</td><td>S 5</td></tr> <tr><td colspan="2">T6N</td></tr> </table> <p>1944</p> </div> <p>Land, nearly level and rolling mountains.</p> <p>Soil, along bottom land, sandy clay loam and on slopes sandy clay and gravel; 2nd to 4th rate.</p> <p>Timber, scattered cottonwood along the bottom land.</p> <p>Undergrowth, dense willows along the bottom land, and dense sagebrush on the slopes. Medium growth of grass and weeds. Good grazing land.</p> <hr/> <p>N. 89° 54' W., between secs. 6 and 31.</p> <p>Ascend over rolling SE. slope, through sagebrush.</p> <p>Top of ascent, 40 ft. above sec. cor., slopes S.; descend.</p> <p>Draw, 40 ft. below top of ascent, course S. 15° W.; ascend</p> <p>Spur, 250 ft. above draw, slopes S.; descend.</p> <p>On SW. slope, 40 ft. below spur.</p> <p>The $\frac{1}{4}$ sec. cor., which is a quartzite, 16x10x8 ins., marked with $\frac{1}{4}$ on N. face, and firmly set with a small mound to the N.</p> <p>At point for cor.</p> <p>Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with the original cor. stone deposited at base, for $\frac{1}{4}$ sec. cor., with brass cap marked</p> <div style="text-align: center;"> <table border="1"> <tr><td>S 31</td></tr> <tr><td>S 6</td></tr> </table> <p>1944</p> </div> <p>raise a mound of stone, 3 ft. base, 2 ft. high N. of cor.</p> <p>Thence</p> <p>N. 89° 54' W., between secs. 6 and 31.</p>	T7N	R3E	S31	S32	S 6	S 5	T6N		S 31	S 6
T7N	R3E										
S31	S32										
S 6	S 5										
T6N											
S 31											
S 6											

DEPENDENT RESURVEY OF NORTH BOUNDARY OF T. 6 N., R. 3 E.

Chains

- 4.20 Draw, 70 ft. below $\frac{1}{4}$ sec. cor., course S.; ascend.
- 13.00 Spur, 100 ft. above draw, projects S.; descend W. slope, entering oak and maple undergrowth.
- 22.10 Stream of clear water, 10 lks. wide, in canyon, 240 ft. below spur, course S.; ascend NE. slope.
- 29.80 Old road, bears NW. and SE.
- 49.61 The closing cor. of Tps. 6 N., Rs. 2 and 3 E., which is a sandstone, 12x6x4 ins., above the ground, marked with CC and 6 grooves on S. face, and 6 notches on E. and W. edges, firmly set and witnessed by a mound of stone, 3 ft. base, 2 ft. high to the S., and an iron pipe, 2 ins. diam., extending 12 ins. above the ground, along side of cor. monument.
- 51.18 On NE. slope, 340 ft. above canyon.

The cor. of Tps. 7 N., Rs. 2 and 3 E., which is an iron post, 3 ins. diam., set, marked and witnessed as described in field notes of T. 7 N., R. 2 E., this group.

Land, mountainous; rolling slopes.

Soil, gravelly and sandy clay loam; 3rd rate.

No timber.

Undergrowth, dense sagebrush on mile; oak and maple on portion of W. half mile. Medium growth of grass and weeds.

Good grazing land,

DEPENDENT RESURVEY OF WEST BOUNDARY OF T. 7 N., R. 4 E.

Reestablishment of surveys executed by Baxter and Dougall, Deputy Surveyors, in 1897.

From the cor. of Tps. 7 and 8 N., Rs. 3 and 4 E., which is an iron post, 3 ins. diam., extending 12 ins. above the ground, marked and witnessed as described in the official records.

Thence

S. 1° 59' E., between secs. 1 and 6.

Along E. slope, through medium dense undergrowth.

12.00 Point of spur, slopes S. 15° W., from N. 15° W.; descend steep SE. slope.

37.00 Draw, 440 ft. below Tp. cor., course SE., 2 chs. dist. to junction with Dry Bread Hollow, course S. 20° E.; ascend NE. slope entering aspen timber.

40.00 On NE. slope, 40 ft. above draw.

The $\frac{1}{4}$ sec. cor., which is a quartzite, 20x12x8 ins., marked with $\frac{1}{4}$ on W. face, firmly set and witnessed by small mound of stone to the W.

At point for cor.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with the original cor. stone deposited at base, for $\frac{1}{4}$ sec. cor., with brass cap marked

DEPENDENT RESURVEY OF WEST BOUNDARY OF T. 7 N., R. 4 E.

Chains

$$\frac{1}{4}$$

S 1	S 6
-----	-----

1944

from which

An aspen, 8 ins. diam., bears S. 63° E., 7 lks. dist., marked $\frac{1}{4}$ S6BT

An aspen, 6 ins. diam., bears S. 42° 30' W., 35 lks. dist., marked $\frac{1}{4}$ S1BT.

Thence

S. 0° 11' E., between secs. 1 and 6.

10.00 Top of ascent, 130 ft. above $\frac{1}{4}$ sec. cor., slopes E.; descend rocky SE. slope.

30.00 Bottom of Dry Bread Hollow, 240 ft. below top of ascent, course S. 20° W.; trail along hollow; ascend NW. slope.

39.88 On NW. slope, 50 ft. above hollow.

Proportionate dist.; no evidence of cor. of secs. 1, 6, 7, and 12 found.

Set an iron post, 3 ft. long, 2 ins. diam., 18 ins. in the ground to solid rock, and in mound of stone to top, with a quartzite, 7x5x3 ins. marked X, deposited at base, for cor. of secs. 1, 6, 7, and 12, with brass cap marked

T7N	
R3E	R4E
S 1	S 6
S12	S 7

1944

Land, mountainous.

Soil, rocky sandy clay loam; 3rd to 4th rate.

Timber, aspen on portion of mile.

Undergrowth, sagebrush, choke cherry, honeysuckle, and young aspen. Medium growth of grass and weeds.

Good grazing land.

S. 0° 11' E., between secs. 7 and 12.

Ascend steep NW. slope through medium dense timber and undergrowth.

12.00 Top of abrupt ascent, bears NE. and SW.; ascend gradually over NW. slope.

39.88 On gradual NW. slope, 200 ft. above sec. cor.

The $\frac{1}{4}$ sec. cor., which is a limestone, 20x16x6 ins., marked with $\frac{1}{4}$ on W. face, firmly set and witnessed by a mound of stone to the W.

At point for cor.

Set an iron post, 3 ft. long, 1 in. diam., 24 ins. in the ground to solid rock and in mound of stone to top, with the original cor. stone deposited at base, for $\frac{1}{4}$ sec. cor.

DEPENDENT RESURVEY OF WEST BOUNDARY OF T. 7 N., R. 4 E.

Chains

SECTION

with brass cap marked

S12 | S 7

1944

from which

An aspen, 10 ins. diam., bears S. 53° 30' W., 30 lks. dist., marked 1/4 S12BT.

Thence

S. 0° 45' W., between secs. 7 and 12.

20.00 Ridge, 50 ft. above 1/4 sec. cor., bears N. 30° E., and S. 30° W.; descend SE. slope.

28.50 Small draw, 250 ft. below ridge, course S. 60° E.; ascend NE. slope.

40.80 Proportionate dist., on NE. slope, 175 ft. above draw. No evidence of cor. of secs: 7, 12, 13, and 18, found.

Set an iron post, 3 ft. long; 2 ins. diam., 24 ins. in the ground and in a mound of stone to top, with a limestone, 7x5x3 ins. marked X, deposited at base, for cor. of secs. 7, 12, 13, and 18, with brass cap marked

T7N
R3E R4E
S12 | S 7
S13 | S18

1944

Land, mountainous.

Soil, rocky and gravelly loam; 3rd to 4th rate.

Timber, medium dense to scattered aspen.

Undergrowth, sagebrush, choke-cherry, and honeysuckle.

Medium growth of grass and weeds. Good grazing land.

S. 0° 45' E., between secs. 13 and 18.

Ascend NE. slope through medium dense undergrowth and scattered timber.

1.00 Spur, 25 ft. above sec. cor., slopes E.; descend S. slope

4.20 Draw, 175 ft. below spur, course E.; ascend NE. slope.

10.50 Spur, 75 ft. above draw, slopes S. 60° E.; descend SE. slope.

28.70 Draw, 700 ft. below spur, course S. 80° E.; ascend NE. slope.

38.00 Spur, 150 ft. above draw, slopes S. 80° E.; descend SE. slope.

40.80 On SE. slope, 60 ft. below spur.


Proportionate dist.; no evidence of 1/4 sec. cor. found.

Set an iron post, 3 ft. long, 1 in. diam., 16 ins. in the ground to solid rock and in a mound of stone to top, with

DEPENDENT RESURVEY OF WEST BOUNDARY OF T. 7 N., R. 4 E.

Chains

a quartzite, 7x5x4 ins., marked X, deposited at base, for 1/4 sec. cor., with brass cap marked



1944

Continue descent over steep rocky SE. slope.

61.20 Old road along Wheat Grass Canyon, bears NE. and SW.

64.00 Stream of clear water, 5 lks. wide, in Wheat Grass Canyon, 530 ft. below 1/4 sec. cor., course SW.; ascend NW. slope.

66.00 Old corral, about 150 lks. diam., bears west, 2 chs. dist.

81.60 On NW. slope, 300 ft. above canyon.

The cor. of secs. 13, 18, 19, and 24, which is a limestone, 19x16x5 ins., marked with 3 grooves on N. and S. faces, firmly set in the ground and witnessed by a mound of stone to the W.

At point for cor.

Set an iron post, 3 ft. long, 2 ins. diam., 20 ins. in the ground to solid rock and in a mound of stone to top, with the original cor. stone deposited at base, for cor. of secs. 13, 18, 19, and 24, with brass cap marked



1944

from which

A Douglas fir, 8 ins. diam., bears south, 9 lks, dist., marked BT.


Land, mountainous; steep rocky slopes. Soil, rocky sandy clay loam; 3rd to 4th rate. Timber, aspen and very scattered Douglas fir. Undergrowth, oak, service berry, and sagebrush. Medium growth of grass and weeds. Good grazing land.

S. 0°'05' E.; between secs. 19 and 24.

Ascend steep rocky NW. slope through scattered timber and dense undergrowth.

36.90 On spur between Wheat Grass Canyon and Bear Wallow Canyon, 1100 ft. above sec. cor., projects SW.

Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground to solid rock and in a mound of stone to top, with a limestone, 7x6x5 ins., marked X, deposited at base, for witness 1/4 sec. cor., with brass cap marked



1944

DEPENDENT RESURVEY OF WEST BOUNDARY OF T. 7 N., R. 4 E.

Chains

211500

Descend over steep rocky S. to SE. slope.

39.10 On steep rocky S. slope broken by ledges; no evidence of $\frac{1}{4}$ sec. cor. found. Impracticable to establish cor. monument at proportionate distance.

65.40 Bottom of Bear Wallow Canyon, 790 ft. below spur, course W.; ascend over NW. slope.

76.20 Proportionate dist., on NW. slope 300 ft. above canyon. No evidence of cor. of secs. 19, 24, 25, and 30 found.

Set an iron post, 3 ft. long, 2 ins. diam., 10 ins. in the ground to solid rock and in a mound of stone to top; with a limestone, 7x5x4 ins., marked X, at base, for cor. of secs. 19, 24, 25, and 30, with brass cap marked

T7N	
R3E	R4E
S24	S19
S25	S30

1944

Land, mountainous; steep rocky slopes. Soil, rocky sandy clay loam; 3rd to 4th rate. Timber, scattered aspen and Douglas fir. Undergrowth, oak, service berry, mahogany, mountain laurel and sagebrush. Medium growth of grass and weeds. Good grazing land.

S. 0° 05' E., between secs. 25 and 30.

Ascend over rocky NW. slope through scattered timber and dense undergrowth.

77.00 Ridge, 1500 ft. above sec. cor., bears N. 80° E., and S. 80° W.; descend SE. slope.

78.10 On SE. slope 25 ft. below ridge.

The $\frac{1}{4}$ sec. cor., which is a limestone, 18x12x10 ins., marked with $\frac{1}{4}$ on W. face, firmly set and witnessed by a large mound of stone to the west.

At point for cor.

Set an iron post, 3 ft. long, 1 in. diam., 15 ins. in the ground to solid rock and in a mound of stone to top, with the original cor. stone deposited at base, for $\frac{1}{4}$ sec. cor. with brass cap marked

S25	S30
-----	-----

1944

Thence

S. 0° 06' W., between secs. 25 and 30.

Descend over rocky SE. slope broken by ledges.


79.27 Proportionate dist., on rocky SE. slope, 800 ft. below ridge. No evidence of cor. of secs. 25, 30, 31, and 36

DEPENDENT RESURVEY OF WEST BOUNDARY OF T. 7 N., R. 4 E.

Chains

found; ...

Set an iron post, 3 ft. long, 2 ins. diam., 10 ins. in the ground to solid rock and in a mound of stone to top, with a limestone, 8x6x4 ins., marked X, deposited at base, for cor. of secs. 25, 30, 31, and 36, with brass cap marked



1944

Land, mountainous; steep rocky slopes. Soil, rocky sandy clay; 3rd to 4th rate. Timber, scattered Douglas fir. Undergrowth, dense oak, mahogany, and service berry, Medium growth of weeds and grass. Good grazing land.


S. 0° 06' W., between secs. 31 and 36.

Descend over rocky SE. slope broken by ledges, through scattered timber, and dense undergrowth.

30.45 No evidence of the witness 1/4 sec. cor. found, as described in the official record.

31.00 On rim of ledge, 200 ft. high, 550 ft. below sec. cor., bears E. and W.

Set an iron post, 3 ft. long, 1 in. diam., 14 ins. in the ground to solid rock and in a mound of stone to top; with a limestone, 5x5x4 ins., marked X, deposited at base, for witness 1/4 sec. cor., with brass cap marked



1944

35.00 South Fork of Ogden River, stream of clear water, 20 lks. wide, 18 ins. deep, in canyon, 250 ft. below witness 1/4 sec. cor., course W.; abrupt ascent over ledges, enter medium dense timber.

39.37 Proportionate dist., on ledge where it is impracticable to establish a corner monument.

43.36 On steep rocky N. slope; no evidence of the witness 1/4 sec. cor. found as described in the official record.

57.00 Top of abrupt N. slope; ascend along steep NW. slope.

70.00 High spur, 1650 ft. above river, projects W.; descend over SW. slope, leaving timber.

78.74 The cor. of Tps. 6 and 7 N., R. 3 and 4 E., 160 ft. below spur.

Land, mountainous; steep rocky slopes broken by ledges. Soil, rocky sandy clay loam; 3rd to 4th rate. Timber, Douglas fir. Undergrowth, oak and mahogany. Medium growth of weeds and grass. Good grazing land.

DEPARTMENT RESERVEWAY OF SOUTH BOUNDARY OF T. 8 N., R. 5 E.

Trains

Reestablishment of surveys executed by James
Martineau, Deputy Surveyor, in 1878.

from the cor. of Tps. 7 N., Rs. 2 and 3 E., which is an
iron post, 3 ins. diam., set, marked and witnessed as
described in the field notes of T. 7 N., R. 2 E., this
group.

ence

S. 77° 22' E., between secs. 1 and 31.

descend N. slope through dense undergrowth.

Stream of clear water, 12 lks. wide, in canyon 100 ft.
below sp. cor., course S. 70° W.; ascend SW. slope enter
scattered patches of timber.

Proportionate dist.; no evidence of $\frac{1}{2}$ sec. cor. found.

Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the
ground to split rock and in a mound of stone to top, for
1/2 sec. cor., with brass cap marked

$$\frac{S \ 1}{S \ 0}$$

1/2 sec.

from which

An aspen, 5 ins. diam., bears S. 3° 45' W., 71 lks.
dist., marked 1871.

An aspen, 5 ins. diam., bears N. 21° 40' W., 14 1/2 lks.
dist., marked 1871.

Spur, 200 ft. above canyon, slopes SW.; descend SE. slope

from this point, a small spring of clear water, bears N.,
1/2 sec. dist.; the water from spring is piped into six
wooden troughs extending S. from the spring.

Stream of clear water, 3 lks. wide, in draw, 270 ft. below
spur, course SW.; ascend

Spur, 200 ft. above draw, slopes N.; descend over gentle
SE. slope.

On gentle SE. slope, 25 ft. below spur, in stake and rider
fence, 4 poles high, bears S. and W.

The cor. of secs. 1, 2, 31, and 32, which is a quartzite,
2 1/2 x 1 1/2 ins., marked with 5 notches on E., and 1 notch on
S. edge, firmly set and witnessed by a mound of stone, 3
ft. base, 1 ft. high to the N.

At point for cor.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the
ground, with the original cor. stone deposited at base,
for cor. of secs. 1, 2, 31, and 32, with brass cap marked

$$\begin{array}{r|l} \text{THE N4E} & \\ \hline 511 & 132 \\ \hline 51 & 53 \\ \hline \text{TM} & \end{array}$$

1871

from which

An aspen, 5 ins. diam., bears N. 39° 15' E., 81 lks.

DEPENDENT RESURVEY OF SOUTH BOUNDARY OF T. 8 N., R. 3 E.

Chains

- dist., marked T8NR3ES32BT.
- An aspen, 5 ins. diam., bears S. 53° E., 56 lks. dist., marked T7NR3ES5BT.
- An aspen, 4 ins. diam., bears S. 21° 15' W., 46 lks. dist., marked T7NR3ES6BT.
- An aspen, 7 ins. diam., bears N. 64° W., 147 lks. dist., marked T8NR3ES31BT.

Land, mountainous.
 Soil, rocky sandy clay mountain loam; 2nd to 4th rate.
 Timber, scattered patches of aspen and very scattered Douglas fir.
 Undergrowth, honeysuckle, chokecherry, sagebrush and scattered maple. Willows along bottom of canyon.
 Medium growth of grass and weeds. Good grazing land.

S. 89° 56' E., between secs. 5 and 32.

Descend over gentle NE. slope, through scattered patches of timber and dense undergrowth, along fence.

- 11.90 Draw, 20 ft. below sec. cor., course NW.; ascend over rolling W. slope.
- 22.00 Ridge, 70 ft. above draw, bears N. and S.; descend over rolling E. slope, leaving timber.
- 29.90 Unimproved road, and gate in fence, road bears NE. and SW.
- 36.00 Bend in fence, bears NE., and W.
- 36.60 Head of small draw, 60 ft. below ridge, course SE.; ascend.
- 40.25 On small knoll, 15 ft. above draw.

The $\frac{1}{4}$ sec. cor., which is a sandstone, 10x9x7 ins., marked $\frac{1}{4}$ on N. face, firmly set and unwitnessed.

At point for cor.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with the original cor. stone deposited at base, for $\frac{1}{4}$ sec. cor., with brass cap marked

$$\frac{S \ 32}{S \ 5}$$

1944

raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.

Thence

S. 89° 50' E., between secs. 5 and 32.

Descend over E. slope.

- 3.80 Stock trail, bears N. and S.
- 3.90 Draw, 40 ft. below $\frac{1}{4}$ sec. cor., course S.; ascend W. slope.
- 19.50 Stock trail, bears N. and S.

DEPENDENT RESURVEY OF SOUTH BOUNDARY OF THE ...

Chains					
30.00	Top of mountain, 210 ft. above draw, bears N. and S.; thence over rolling top, entering scattered timber.				
39.00	Unimproved road, bears N. and S.				
39.91	The cor. of secs. 4, 5, 32, and 33, which is a quartzite 15x6x6 ins., marked with 4 notches on E. and 2 notches W. edge, firmly set, and witnessed by a small mound of stone to the W.				
	At point for cor.				
	Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in ground, with the original cor. stone deposited at base, for cor. of secs. 4, 5, 32, and 33, with brass cap mark				
	<table border="1"> <tr><td>T8NR3E</td></tr> <tr><td>S32 S33</td></tr> <tr><td>S 5 S 4</td></tr> <tr><td>T7N</td></tr> </table>	T8NR3E	S32 S33	S 5 S 4	T7N
T8NR3E					
S32 S33					
S 5 S 4					
T7N					
	1944 from which				
	An aspen, 8 ins. diam., bears N. 63° E., 11 lks. dist., marked T8NR3ES33BT.				
	An aspen, 6 ins. diam., bears S. 71° E., 18 lks. dist., marked T7NR3ES4BT.				
	An aspen, 4 ins. diam., bears S. 16° 30' W., 24 lks. dist., marked T7NR3ES5BT.				
	An aspen, 5 ins. diam., bears N. 25° W., 3 lks. dist., marked T8NR3ES32BT.				
	Land, mountainous; rolling slopes. Soil, rocky sandy clay mountain loam; 2nd to rd rate. Timber, aspen on portions of mile. Undergrowth, sagebrush, honeysuckle, choke cherry, and service berry, Medium growth of grass and weeds. Good grazing land.				
	S. 89° 14' E., between secs. 4 and 33.				
	Over rolling top of mountain, through scattered timber, and medium dense undergrowth.				
9.50	Stake and rider fence, 4 poles high, bears S. 89° 14' E., and N. 70° W.; thence along fence.				
15.00	Descend over rolling E. slope, leaving mountain top, bear N. and S.				
30.30	Small stream of clear water, in draw, 150 ft. below sec. cor., course NE.; ascend along N. to NW. slope.				
39.83	On spur, 40 ft. above draw, slopes N.				
	Proportionate dist.; no evidence of 1/4 sec. cor. found.				
	Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/4 sec. cor., with brass cap marked				
	<table border="1"> <tr><td>S 33</td></tr> <tr><td>S 4</td></tr> </table>	S 33	S 4		
S 33					
S 4					
	1944 raise a mound				

DEPENDENT RESURVEY OF SOUTH BOUNDARY OF T. 8 N., R. 3 E.

Chains

stone, $3\frac{1}{2}$ ft. base, $2\frac{1}{2}$ ft. high N. of cor.

Descend E. slope.

48.80 Small draw, 30 ft. below $\frac{1}{4}$ sec. cor., course NE.; thence along N. slope.

69.00 Descend steep NE. slope.

79.66 At cor. of fence, bearing N., and N. $89^{\circ} 14'$ W., on N. slope 460 ft. below $\frac{1}{4}$ sec. cor.

The cor. of secs. 3, 4, 33, and 34, which is a sandstone, $15 \times 10 \times 6$ ins., marked with 3 notches on E. and W. edges, firmly set and unwitnessed.

At point for cor.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 3, 4, 33, and 34, with brass cap marked

T8N R3E	
S33	S34
S 4	S 3
T7N	

1944

from which

An aspen, 6 ins. diam., bears N. 56° E., 19 lks. dist., marked T8NR3ES34BT.

An aspen, 6 ins. diam., bears S. 26° E., 62 lks. dist., marked T7NR3ES3BT.

An aspen, 5 ins. diam., bears S. 81° W., 52 lks. dist., marked T7NR3ES4BT.

An aspen, 6 ins. diam., bears N. 81° W., 51 lks. dist., marked T8NR3ES33BT.

Land, mountainous.
Soil, dark sandy clay mountain loam; rocky; 2nd rate.
Timber, scattered aspen.
Undergrowth, sagebrush, chokecherry, service berry, honeysuckle, and young aspen. Medium growth of grass and weeds.
Good grazing land.

N. $89^{\circ} 24'$ E., between secs. 3 and 34.

Along N. slope, through scattered timber, and dense undergrowth.

20.00 Descend over NE. slope.

37.68 Proportionate dist., on NE. slope 530 ft. below sec. cor. No evidence of $\frac{1}{4}$ sec. cor. found.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked

S34
S 3

1944

from which

An aspen, 5 ins. diam., bears N. 58° E., 18 lks.

DEPENDENT RESURVEY OF SOUTH BOUNDARY OF T. 8 N., R. 3 E.

Chains

dist., marked 4S34BT.

Raise a mound of stone, 3 ft. base, 2 ft. high N. of cor.

49.70 Beaver Creek, a stream of clear water, 10 lxs. wide, in canyon, 200 ft. below 1/4 sec. cor., course S. 10° E.; ascend W. slope, leaving timber.

51.50 Oiled highway, bears S. 9° E., and N. 9° W.

67.00 Point of spur, 370 ft. above canyon. slopes SW.; descend

70.50 Head of draw, 30 ft. below spur, course SW.; ascend.

75.36 On spur, 70 ft. above draw, projects S. 30° W.

The cor. of secs. 2, 3, 34, and 35, which is a quartzite, 17x12x8 ins., marked with 2 notches on E., and 4 notches on W. edge, firmly set in the ground and mound of stone.

At point for cor.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, with the original cor. stone deposited at base, for cor. of secs. 2, 3, 34, and 35, with brass cap marked



1944

stone, 3 1/2 ft. base, 3 ft. high W. of cor. raise a mound of

Land, mountainous.
Soil, rocky and gravelly loam; 3rd rate.
Timber, scattered aspen on portion of mile.
Undergrowth, sagebrush, maple, oak, choke cherry, service berry, honeysuckle, and mountain laurel. Medium growth of weeds and grass. Good grazing land.

N. 89° 52' E., between secs. 2 and 35.

Descend over E. slope through medium dense undergrowth.

10.30 Draw, 130 ft. below sec. cor., course S. 30° W.; ascend.

17.00 Spur, 140 ft. above draw, projects S.; descend.


26.00 Draw, 40 ft. below spur, course SW.; ascend.

31.50 Spur, 100 ft. above draw, projects S. 30° W.; descend.

40.30 Proportionate dist., on N. side of old road in canyon, 130 ft. below spur, bears N. 30° E., and S. 30° W.

No evidence of 1/4 sec. cor. found.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/4 sec. cor., with brass cap marked



1944

raise a mound of

DEPENDENT RESURVEY OF SOUTH BOUNDARY OF T. 6 N., R. 3 E.

Chains

- stone, 3 1/2 ft. base, 3 ft. high, N. of cor.
- 40.60 Old road, bears N. 30° E., and S. 30° W.
- 41.50 Canyon, 130 ft. below spur, course S. 30° W.; ascend NW. slope, entering scattered timber.
- 73.00 Top of ascent, 330 ft. above 1/4 sec. cor., slopes N.; descend NE. slope.
- 79.60 Draw, 40 ft. below top of ascent, course NW.; ascend.
- 80.60 On a SW. slope, 20 ft. above draw.

Proportionate dist.; no evidence of cor. of secs. 1, 2, 35, and 36 found.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground and in a mound of stone to top, for cor. of secs. 1, 2, 35, and 36, with brass cap marked



1944 from which

An aspen, 7 ins. diam., bears N. 31° 45' E., 24 lks. dist., marked T8NR3ES36BT.

An aspen, 7 ins. diam., bears S. 62° 30' E., 20 lks. dist., marked T7NR3ES1BT.

An aspen, 7 ins. diam., bears S. 76° 15' W., 28 lks. dist., marked T7NR3ES2BT.

An aspen, 5 ins. diam., bears N. 53° W., 22 lks. dist., marked T8NK3ES35BT.

Land, mountainous.
 Soil, rocky and gravelly loam; 3rd rate.
 Timber, scattered aspen on portion of mile.
 Undergrowth, sagebrush, chokecherry, honeysuckle, maple, and willows. Medium growth of weeds and grass.
 Good grazing land.

N. 89° 52' E., between secs. 1 and 36.


Ascend SW. slope through scattered timber, and dense undergrowth.

10.00 On point of spur; slopes N. 75° W.; thence ascend along N. slope.

40.30 Proportionate dist.; on rolling top of ridge, 460 ft. above sec. cor.; bears N. and S.

No evidence of 1/4 sec. cor. found.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/4 sec. cor., with brass cap marked



1944 from which

DEPENDENT RESURVEY OF SOUTH BOUNDARY OF T. 8 N., R. 3 E.

Chains

201289

An aspen, .5 ins. diam., bears S. 7° E., 12 lks. dist., marked $\frac{1}{4}$ S1BT.

An aspen, 4 ins. diam., bears N. 72° 30' W., 24 lks. dist., marked $\frac{1}{4}$ S36BT.

49.60 Head of draw, course SE.; old road along draw; ascend SW. slope.

76.00 Spur, 240 ft. above draw, projects S.; descend E. slope.

80.60 The cor. of Tps. 7 and 8 N., Rs. 3 and 4 E.

Land, mountainous.

Soil, rocky and gravelly loam; 3rd rate.

Timber, scattered aspen.

Undergrowth, sagebrush, choke cherry, service berry, and honeysuckle. Medium growth of grass and weeds.

Good grazing land.

DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 3 E.

Reestablishment of surveys executed by Baxter and Dougall, Deputy Surveyors, in 1897.

From the cor. of secs. 1, 2, 35, and 36, on S. bdy. of Tp N. 0° 14' W., between secs. 35 and 36.

Descend over abrupt N. slope through dense undergrowth and scattered timber.

15.50 South Fork of Ogden River, stream of clear water, 30 lks. wide, in canyon, 500 ft. below sec. cor., course W.; abrupt ascent over S. slope.

28.00 Top of ascent, on W. side of point of spur, 400 ft. above canyon; thence along W. slope.

39.46 Proportionate dist., on rocky W. slope. No evidence of $\frac{1}{4}$ sec. cor., found.

Set an iron post, 3 ft. long, .1 in. diam., 24 ins. in the ground to solid rock and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$

S35 | S36

1944

stone, 3½ ft. base, 2 ft. high, W. of cor. raise a mound of

45.00 Ascend over SW. slope.

78.92 On SW. slope 650 ft. above $\frac{1}{4}$ sec. cor.

The cor. of secs. 25, 26, 35, and 36, which is a sandstone 18x12x8 ins., marked with 1 notch on E. and S. edges, firmly set and unwitnessed.

At point for cor.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for cor. of secs. 25, 26, 35, and 36, with brass cap marked

DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 3 E.

Chains

T7N R3E
 S26 | S25
 S35 | S36

1944

raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

This cor. stands at the cor. of old woven and barbed wire fence line, bearing N. and W.

Land, mountainous; steep slopes.

Soil, rocky sandy loam; 3rd to 4th rate.

Timber, a few scattered Douglas fir on portion of S. half mile.

Undergrowth, dense oak, sagebrush, and scattered maple, service berry, and honeysuckle. Medium growth of grass and weeds. Good grazing land.

From the cor. of secs. 25, 30, 31, and 36, on E. bdy. of Tp.; thence

N. 89° 05' W., between secs. 25 and 36.

Ascend over steep rocky sl. slope broken by ledges, through medium dense undergrowth.

37.00 Spur, 750 ft. above sec. cor., projects S.; descend over W. slope.

40.97 On W. slope, 50 ft. below spur.

The $\frac{3}{4}$ sec. cor., which is a sandstone, 24x16x10 ins., marked $\frac{3}{4}$ on N. face, firmly set and witnessed by a mound of stone, 3 ft. base, 2 ft. high to the N.

At point for cor.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with the original cor. stone deposited at base, for $\frac{3}{4}$ sec. cor., with brass cap marked

S 25
 S 36

1944

from which

A mahogany, 12 ins. diam., bears S. 88° W., 16 lks. dist., marked $\frac{3}{4}$ S36BT.

A mahogany, 8 ins. diam., bears N. 62° W., 29 lks. dist., marked $\frac{3}{4}$ S25BT.

Thence

S. 89° 48' W., between secs. 25 and 36.

25.00 Ravine, 450 ft. below $\frac{3}{4}$ sec. cor., course S.; ascend.

38.00 Spur, 75 ft. above ravine, projects S.; descend.

39.88 The cor. of secs. 25, 26, 35, and 36, 15 ft. below spur.

Land, mountainous; steep rocky slopes on E. half mile.
 Soil, rocky sandy clay loam; 3rd to 4th rate.
 No timber.

DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 3 E.

124

Chains

Undergrowth, dense sagebrush, and scattered oak, maple, and mahogany. Medium growth of grass and weeds. Good grazing land.

N. 0° 07' E., between secs. 25 and 26.

Ascend over rolling SW. slope, through dense sagebrush.


20.00 Spur, 50 ft. above sec. cor., projects S. 80° W.; trail along spur, bears N. 80° E., and S. 80° W.; descend over N. slope, entering oak, choke cherry, maple, and honeysuckle undergrowth.

39.79 On steep N. slope, 150 ft. below spur.

The 1/4 sec. cor., which is a red quartzite, 18x12x9 ins., marked with 1/4 on W. face, firmly set and witnessed by a mound of stone, 3 ft. base, 2 ft. high, to the W.

At point for cor.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with the original cor. stone deposited at base, for 1/4 sec. cor., with brass cap marked



Thence


N. 0° 36' E., between secs. 25 and 26.

19.00 Old road in canyon, bears N. 60° E., and S. 60° W.

19.40 Stream of clear water, 6 lks. wide, 5 ins. deep, in Bear Wallow Canyon, 1100 ft. below 1/4 sec. cor., course S. 60° W. ascend abrupt SE. slope, entering mahogany.

39.88 Proportionate dist., on rocky SE. slope, 400 ft. above canyon. No evidence of cor. of secs. 23, 24, 25, and 26 found.

Set an iron post, 3 ft. long, 2 ins. diam., 10 ins. in the ground to solid rock and in a mound of stone to top, for cor. of secs. 23, 24, 25, and 26, with brass cap marked



Land, mountainous; steep rocky slopes broken by ledges. Soil, rocky sandy clay; 3rd to 4th rate. No timber.

Undergrowth, sagebrush, choke cherry, honeysuckle, maple, service berry and mahogany. Medium growth of grass and weeds. Good grazing land.

From the cor. of secs. 19, 24, 25, and 30 on E. bdy of Tp.

DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 3 E.

Chains

Thence

N. 88° 42' W., between secs. 24 and 25.

Descend along NW. slope, through dense undergrowth.

40.16

Proportionate dist., on S. side of bottom of Bear Wallow Canyon, No evidence of the 1/4 sec. cor. found.

Set an iron post, 3 ft. long, 1 in. diam., 26 ins. in the ground, and in a mound of stone to top, with a limestone, 5x4x3 ins., marked X, deposited at base, for 1/4 sec. cor., with brass cap marked

1/4 S.24
S 25
1944

43.00

Stream of clear water, 3 lks. wide, in Bear Wallow Canyon, 350 ft. below sec. cor., course S. 80° W.; thence along a S. slope.

44.20

Trail along canyon, bears N. 80° E., and S. 80° W.

61.00

Descend over SW. slope.

64.00

Stream of clear water, 10 lks. wide, in Wheat Grass Canyon, course S. 30° W.; ascend over rocky SE. slope.

64.75

Old road, bears N. 30° E., and S. 30° W.

80.32

The cor. of secs. 23, 24, 25, and 26.

Land, mountainous; steep slopes broken by ledges. Soil, rocky sandy clay loam; 3rd to 4th rate. No timber. Undergrowth, Oak, choke cherry, service berry, maple, honeysuckle, and mahogany. Medium growth of grass and weeds. Good grazing land.

N. 2° 02' W., between secs. 23 and 24.

Ascend over steep SE. slope, through medium dense untergrowth.

39.90

On steep SE. slope at foot of ledge, 750 ft. above sec. cor.

The 1/4 sec. cor., which is a limestone, 18x14x10 ins., marked with 1/4 on W. face, firmly set and witnessed by a mound of stone, 3 ft. base, 2 ft. high, to the W.

At point for cor.

Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground to solid rock, and in a mound of stone to top, with the original cor. stone deposited at base, for 1/4 sec. cor., with brass cap marked

1/4
S23 | S24
1944

Thence

DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 3 E.

Chains

Station

N. 1° 04' W., between secs. 23 and 24.


2.00 Spur, 40 ft. above 1/4 sec. cor., projects SW., from N. 25° E.; descend over NW. slope.

39.68 On NW. slope, 275 ft. below spur.

The cor. of secs. 13, 14, 23, and 24, which is a limestone 14x12x10 ins., marked with 3 notches on S., and 1 notch on E. edge, firmly set and witnessed by a mound of stone, 3 ft. base, 2 ft. high, to the W.

At point for cor.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, with the original cor. stone deposited at base, for cor. of secs. 13, 14, 23, and 24, with brass cap marked



1944

Land, mountainous. Soil, rocky sandy clay loam; 3rd to 4th rate. No timber. Undergrowth, sagebrush, choke cherry, service berry, and honeysuckle. Scattered mahogany on S. half mile. Medium growth of grass and weeds. Good grazing land.

From the cor. of secs. 13, 18, 19, and 24, on E. bdy. of T. 7 N.

Thence

N. 88° 38' W., between secs. 13 and 24.


Descend over NW. slope, through medium dense undergrowth.

17.50 Stream of clear water, 5 lks. wide, in Wheat Grass Canyon, 375 ft. below sec. cor., course SW.; ascend over steep SE. slope.

18.50 Old road, bears NE. and SW.

41.29 Proportionate dist., on rocky SE. slope, 650 ft. above canyon. No evidence of 1/4 sec. cor. found.

Set an iron post, 3 ft. long, 1 in. diam., 24 ins. in the ground to solid rock, and in a mound of stone to top, with a limestone, 8x6x4 ins., marked X, deposited at base, for 1/4 sec. cor., with brass cap marked



1944

53.70 Head of small draw, course SE.

64.50 Spur, 400 ft. above 1/4 sec. cor., projects S. 25° W.; descend over W. slope.

82.58 The cor. of secs. 13, 14, 23, and 24, 320 ft. below spur.

Land, mountainous; steep rocky slopes.

DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 3 E.

Chains

Soil, rocky sandy clay loam; 3rd to 4th rate.
No timber.

Undergrowth, oak, sagebrush, mahogany, maple, and service
berry. Medium growth of grass and weeds.
Good grazing land.

N. 0° 23' W., between secs. 13 and 14.

Descend over NW. slope, through dense undergrowth.

- 3.00 Draw, 20 ft. below sec. cor., course S. 60° W.; ascend
over S. slope.
- 9.50 Spur, 200 ft. above sec. cor., projects S. 60° W.; descend
over N. slope.
- 19.00 Draw, 160 ft. below spur, course W.; ascend over SW. slope.
- 28.00 Top of ascent, 200 ft. above draw, slopes W.; descend
along steep W. slope.
- 39.87 On steep W. slope, 120 ft. below top of ascent.

The 4 sec. cor., which is a sandstone, 15x10x8 ins.,
marked with 4 on N. face, firmly set and witnessed by a
mound of stone, 3 ft. base, 2 ft. high to the N.

At point for cor.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the
round, with the original cor. stone deposited at base,
for 4 sec. cor., with brass cap marked

314 | 313
1944

Thence

N. 0° 03' E., between secs. 13 and 14.

- 5.00 Descend over steep NW. slope.
- 26.60 Trail, bears N. 30° E., and S. 30° W.
- 27.40 Dry bread hollow, 460 ft. below 4 sec. cor., course S. 30°
W.; ascend over SE. slope.
- 39.84 On steep SE. slope, 350 ft. above hollow.

The cor. of secs. 11, 12, 13, and 14, which is a limestone,
15x10x8 ins., marked with 4 notches on S., and 1 notch on
E. edge, firmly set and witnessed by a small mound of
stone.

At point for cor.

Set an iron post, 3 ft. long, 2 ins. diam., 20 ins. in the
ground to solid rock, and in a mound of stone to top,
with the original cor. stone deposited at base, for cor.
of secs. 11, 12, 13, and 14, with brass cap marked

DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 5 E.

Chains

SCALE

T7N R3E
S11 | S12
S14 | S13

1944

Land, mountainous; steep slopes.
Soil, rocky sandy clay mountain loam; 3rd rate.
No timber.
Undergrowth, sagebrush, oak, maple, choke cherry, service berry, and honeysuckle. Medium growth of weeds and grass.
Good grazing land.

From the cor. of secs. 7, 12, 13, and 18, on E. bdy. of Thence

N. 88° 57' W., between secs. 12 and 13.

Ascend over NE. slope, through dense undergrowth.

14.00 Spur, 100 ft. above sec. cor., projects S. 30° W.; descend over NW. slope.

40.80 Proportionate dist., on NW. slope, 380 ft. below spur. No evidence of 1/4 sec. cor. found.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground and in a mound of stone to top, with a limestone, 7x6x5 ins., marked X, deposited at base, for 1/4 sec. cor., with brass cap marked

1/4 S12
S13

1944

68.40 Trail, bears N. 40° E., and S. 40° W.

69.20 Dry Bread Hollow, 430 ft. below 1/4 sec. cor., course S. 40° W.; ascend SE. slope.

81.60 The cor. of secs. 11, 12, 13, and 14, 320 ft. above hollow

Land, mountainous.
Soil, rocky sandy clay loam; 3rd rate.
No timber.
Undergrowth, oak, maple, choke cherry, sagebrush, and honeysuckle. Medium growth of grass and weeds.
Good grazing land.

N. 0° 02' W., between secs. 11 and 12.

Ascend over steep SE. slope, through medium dense undergrowth.

14.00 Ascend along E. slope.

26.50 Spur, projects S. 20° W.; ascend along W. slope of spur.

38.00 Recross spur, 510 ft. above sec. cor., projects SE. about 5 chs. dist., thence S.; ascend gradually along E. slope.

DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 3 E.

Chains

41.65 The $\frac{1}{4}$ sec. cor., which is a quartzite, 14x10x8 ins., marked with $\frac{1}{4}$ on W. face, firmly set and witnessed by a mound of stone, $3\frac{1}{2}$ ft. base, 2 ft. high, to the W.

At point for cor.

Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground to solid rock and in a mound of stone to top, with the original cor. stone deposited at base, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$
 S11 | S12
 1944

Thence

N. $0^{\circ} 02'$ E., between secs. 11 and 12.

Continue gradual ascent along E. slope.

40.11 On ridge, 100 ft. above $\frac{1}{4}$ sec. cor., bears N. 30° E., and S. 10° W.

The cor. of secs. 1, 2, 11, and 12, which is a quartzite, 16x9x5 ins., marked with 5 notches on S., and 1 notch on E. edge, firmly set in the ground and mound of stone.

At point for cor.

Set an iron post, 3 ft. long, 2 ins. diam., 20 ins. in the ground to solid rock and in a mound of stone to top, with the original cor. stone deposited at base, for cor. of secs. 1, 2, 11, and 12, with brass cap marked

T7N R3E
 S 2 | S 1
 S11 | S12
 1944

Land, mountainous.

Soil, rocky and gravelly; 3rd to 4th rate.

No timber.

Undergrowth, dense sagebrush, and scattered oak, maple, service berry, and honeysuckle. Medium growth of grass and weeds. Good grazing land.

From the cor. of secs. 1, 6, 7, and 12, on E. bdy. of Tp.

Thence

N. $85^{\circ} 31'$ W., between secs. 1 and 12.

Descend over W. slope through scattered timber, and dense undergrowth.

5.20 Dry Bread Hollow and trail, 110 ft. below sec. cor., course S. 15° W.; ascend E. slope.

39.00 Spur, 450 ft. above hollow, projects S. 15° W.; descend W. slope.

41.18 On W. slope, 15 ft. below spur.

DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 3 E.

Chains

The $\frac{1}{4}$ sec. cor., which is a quartzite, 15x10x8 ins., marked with $\frac{1}{4}$ on N. face, firmly set and witnessed by a mound of stone, 3 ft. base, 2 ft. high to the N.

At point for cor.

Set an iron post, 3 ft. long, 1 in. diam., 24 ins. in the ground and in a mound of stone to top, with the original cor. stone deposited at base, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$ S 1
S 12

1944

Thence

S. 89° 28' W., between secs. 1 and 12.

10.50 Draw, 250 ft. below spur, course S.; ascend.

25.00 Point of spur, 250 ft. above draw, slopes S.; descend.

29.00 Draw, 100 ft. below spur, course S.; ascend.

39.94 The cor. of secs. 1, 2, 11, and 12, 150 ft. above draw.

Land, mountainous.

Soil, rocky and gravelly; 3rd rate.

Timber, aspen on portion of E. half mile.

Undergrowth, sagebrush, oak, choke cherry, maple, and honeysuckle. Medium growth of grass and weeds.

Good grazing land.

From the cor. of secs. 1, 2, 35, and 36, on N. bdy. of Tp.

S. 0° 59' E., between secs. 1 and 2.

Descend SW. slope, through dense undergrowth and scattered timber.

0.80 Draw, 20 ft. below sec. cor., course NW.; ascend over NE. slope.

21.00 Spur, 370 ft. above draw, projects N. 70° W.; descend S. slope.

37.50 Draw, 180 ft. below spur, course N. 65° W.; ascend over N. slope.

38.89 Proportionate dist.; no evidence of $\frac{1}{4}$ sec. cor. found.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$
S 2 | S 1

1944

from which

An aspen, 5 ins. diam., bears S. 67° E., 32 lks. dist., marked $\frac{1}{4}$ S1BT.

DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 3 E.

Chains

- .. An aspen, 4 ins. diam., bears S. 51° 30' W., 24 lks. dist., marked $\frac{1}{4}$ S2BT.
- 51.00 Spur, 200 ft. above $\frac{1}{4}$ sec. cor., projects N. 65° W.; descend over SW. slope.
- 57.80 Draw, 90 ft. below spur, course N. 65° W.; ascend over NW. slope.
- 77.39 The cor. of secs. 1, 2, 11, and 12, 130 ft. above draw.
Land, mountainous.
Soil, rocky sandy clay mountain loam; 2nd to 4th rate.
Timber, scattered aspen.
Undergrowth, sagebrush, choke cherry, mountain laurel, and honeysuckle. Medium growth of grass and weeds.
Good grazing land.
-
- From the cor. of secs. 2, 3, 34, and 35, on S. bdy. of Tp. N. 0° 23' W., between secs. 34 and 35.
Along a W. slope through medium dense undergrowth.
- 16.00 Descend over abrupt NW. slope broken by ledges.
- 25.60 Skull Creek a stream of clear water, 10 lks. wide, in canyon, 150 ft. below sec. cor., course N. 20° E., about 2 chs. dist., to junction with South fork of Ogden River. Ascend abrupt SE. slope over ledges.
- 27.00 Top of ascent, 40 ft. above creek, thence descend along an east slope broken by ledges.
- 30.70 South Fork of Ogden River, stream of clear water, 30 lks. wide, in boxed canyon, course N. 70° W., from S. 30° E.; ascend over steep SW. slope.
- 36.40 Trail, bears E. and W.
- 40.11 On steep SW. slope, 300 ft. above river.
The $\frac{1}{4}$ sec. cor., which is a limestone, 24x15x8 ins., marked with $\frac{1}{4}$ on W. face, firmly set and witnessed by a small mound of stone to the W.
At point for cor.
Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground to solid rock, and in a mound of stone to top, with the original cor. stone deposited at base, for $\frac{1}{4}$ sec. cor., with brass cap marked
 $\frac{1}{4}$
S34 | S35
1944 from which
A mahogany, 8 ins. diam., bears S. 16° E., 12 lks. dist., marked $\frac{1}{4}$ S35BT.
- Thence
N. 0° 09' E., between secs. 34 and 35.
Continue ascent over steep SW. slope.

DEPENDENT SURVEY OF SUBDIVISION OF T. 7 N., R. 3 E.

Chains

9.00 Top of ascent, 200 ft. above $\frac{1}{4}$ sec. cor., slopes SW.; descend over NW. slope.

12.70 On a NW. slope, 400 ft. below top of ascent.

The cor. of secs. 26, 27, 34, and 35, which is a washed cobblestone, 20x12x10 ins., marked with 1 notch on S., and 2 notches on E. edge, firmly set and witnessed by a mound of stone, 3 ft. base, 2 ft. high to the W.

At point for cor.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in ground, with the original cor. stone deposited at base, for cor. of secs. 26, 27, 34, and 35, with brass cap marked

T7N	R3E
S27	S26
S34	S35

1944

Land, mountainous.

Soil, gravelly and rocky mountain loam; 3rd rate.

No timber.

Undergrowth, sagebrush, oak, service berry and scattered mahogany. Medium growth of grass and weeds.

Good grazing land.

From the cor. of secs. 25, 26, 35, and 36.

N. 69° 57' W., between secs. 26 and 35.

Descend over a W. slope through dense undergrowth.

16.70 Draw, 120 ft. below sec. cor., course S.; ascend over E. slope.

17.00 Spur, 30 ft. above draw, projects S.; descend.

24.00 Draw, 150 ft. below spur, course S. 10° W.; ascend.

31.00 Spur, 100 ft. above draw, projects S. 10° W.; descend.

36.70 Draw, course S, 120 ft. below spur.; thence along S. slope.

40.21 The $\frac{1}{4}$ sec. cor., which is a quartzite, 16x10x 8 ins., marked with $\frac{1}{4}$ on N. face, firmly set and witnessed by a mound of stone, 3 ft. base, 2 ft. high, to the N.

At point for cor.

Set an iron post, 3 ft. long, 1 in. diam., 24 ins. in the ground and in a mound of stone to top, with the original cor. stone deposited at base, for $\frac{1}{4}$ sec. cor., with brass cap marked

S 26
$\frac{1}{4}$ S 35

1944

Thence

N. 88° 19' W., between secs. 26 and 35.

DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 3 E.

Chains

1.00 Spur, projects SW.; descend over NW. slope.

39.43 The cor. of secs. 26, 27, 34, and 35, 850 ft. below $\frac{1}{4}$ sec. cor.

Land, mountainous.
Soil, gravelly and rocky mountain loam; 3rd rate.
No timber.
Undergrowth, sagebrush, oak, service berry, choke cherry, honeysuckle, and maple. Medium growth of grass and weeds.
Good grazing land.

North, between secs. 26 and 27.

Descend over a NW. slope through dense undergrowth.

3.50 A fork of the South Fork of Ogden River, a stream of clear water, 40 lks. wide, in canyon, 30 ft. below sec. cor., course S. 20° W.; ascend over rocky SE. slope.

6.00 Graded road, bears N. 20° E., and S. 20° W.

37.78 On steep rocky SE. slope, 700 ft. above canyon.

The $\frac{1}{4}$ sec. cor., which is a limestone, 16x6x8 ins., marked with $\frac{1}{4}$ on W. face, firmly set and witnessed by a small mound of stone.

At point for cor.

Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground to solid rock and in a mound of stone to top, with the original cor. stone deposited at base, for $\frac{1}{4}$ sec. cor., with brass cap marked



From this $\frac{1}{4}$ sec. cor., a dam across stream in canyon, bears S. 80° 30' E., about 15.00 chs. dist.

Thence

N. 0° 02' W., between secs. 26 and 27.

8.00 Top of ascent, 80 ft. above $\frac{1}{4}$ sec. cor., slopes E.; descend over NE. slope.

12.80 Small draw, course S. 60° E.; thence along E. slope.

24.20 Draw, 150 ft. below top of ascent, course S. 20° E.; ascend over SW. slope.

40.01 On SW. slope, 330 ft. above draw.

The cor. of secs. 22, 23, 26, and 27, which is a quartzite, 16x10x8 ins., marked with 2 notches on S. and E. edges, firmly set and witnessed by a mound of stone, 3 ft. base, 2 ft. high to the W.

At point for cor.

Set an iron post, 3 ft. long, 2 ins. diam., 18 ins. in the

134

DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 3 E.

Chains

ground to solid rock, and in a mound of stone to top, with the original cor. stone deposited at base, for cor. of secs. 22, 23, 26, and 27, with brass cap marked

T7N R3E	
S22	S23
S27	S26

1944

Land, mountainous.
Soil, rocky and gravelly mountain loam; 3rd to 4th rate.
No timber.
Undergrowth, sagebrush, oak, maple and scattered mahogany
Medium growth of grass and weeds. Good grazing land.

From the cor. of secs. 23, 24, 25, and 26.

S. 89° 24' W., between secs. 23 and 26.

Ascend over rocky SE. slope broken by ledges, through medium dense undergrowth.

26.00 Top of ascent on rocky point of spur, 200 ft. above sec. cor., slopes S. 15° W.; descend along broken SW. slope.

37.00 Descend over steep broken W. slope.

40.05 Proportionate dist., on rocky W. slope, 180 ft. below top of ascent. No evidence of $\frac{1}{4}$ sec. cor. found.

Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground to solid rock, and in a mound of stone to top, with a limestone, 8x5x4 ins., marked X, deposited at base, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$	S 23
	S 26

1944

45.00 Stream of clear water, 20 lks. wide, in Dry Bread Hollow, 300 ft. below $\frac{1}{4}$ sec. cor., course S.; ascend over steep rocky SE. slope.

46.50 Trail, bears N. and S.

51.00 Point of spur, 165 ft. above stream, slopes SE.; descend over SW. slope.

55.00 Draw, 35 ft. below point of spur, course SE.; ascend over broken E. slope.

79.00 Spur, 330 ft. above draw, projects S.; descend over W. slope.

80.10 The cor. of secs. 22, 23, 26, and 27, 10 ft. below spur.

Land, mountainous; steep rocky slopes broken by ledges.
Soil, rocky mountain loam; 3rd to 4th rate.
Timber, a few scattered fir.
Undergrowth, sagebrush, oak, maple, choke cherry, and scattered mahogany. Medium dense growth of grass and weeds. Fair grazing land.

DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 3 E.

Chains

N. 0° 04' E., between secs. 22 and 23.

Ascend over SW. slope through dense undergrowth.

3.00 Spur, 15 ft. above sec. cor., projects SE. about 1 chain, thence S., from N. 70° W.; descend over NE. slope.

19.00 Draw, 230 ft. below spur, course SE.; ascend over SW. slope.


35.00 Spur, 220 ft. above draw, slopes SW.; descend.

39.95 In small draw, 20 ft. below spur, course SW.

The $\frac{1}{4}$ sec. cor., which is a quartzite, 12x10x10 ins., marked with $\frac{1}{4}$ on W. face, firmly set and witnessed by a mound of stone, 3 ft. base, 2 ft. high to the W.

At point for cor.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with the original cor. stone deposited at base, for $\frac{1}{4}$ sec. cor., with brass cap marked



Thence

N. 0° 01' E., between secs. 22 and 23.

Ascend over a SW. slope.


28.50 Spur, 230 ft. above $\frac{1}{4}$ sec. cor., projects S. 60° E.; descend over a N. slope.

39.88 On N. slope, 150 ft. below spur.

The cor. of secs. 14, 15, 22, and 23, which is a cobblestone, 20x12x8 ins., marked with 3 notches on S., and 2 notches on E. edge, firmly set and witnessed by a mound of stone, 3 ft. base, 2 ft. high to the W.

At point for cor.

Set an iron post, 3 ft. long, 2 ins. diam., 20 ins. in the ground to solid rock, and in a mound of stone to top, with the original cor. stone deposited at base, for cor. of secs. 14, 15, 22, and 23, with brass cap marked



Land, mountainous.

Soil, gravelly and rocky mountain loam; 3rd rate.

No timber.

Undergrowth, sagebrush, oak, maple, and service berry.

Medium growth of weeds and grass. Good grazing land.

DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 3 E.

Chains

From the cor. of secs. 13, 14, 23, and 24.

S. 89° 51' W., between secs. 14 and 23.

Descend over NW. slope through dense undergrowth.

2.25 Draw, 60 ft. below sec. cor., course S. 60° W.; descend along a S. slope.

27.00 Spur, 235 ft. below sec. cor., projects SW; descend over steep NW. slope.

37.25 Trail bears NE. and SW.

38.76 Bottom of Dry Bread Hollow, 425 ft. below spur, course SW.; ascend over a SE. slope.

39.20 The $\frac{1}{4}$ sec. cor., which is a limestone, 24x17x6 ins., marked with $\frac{1}{4}$ on N. face, firmly set and witnessed by a mound of stone, $3\frac{1}{2}$ ft. base, 2 ft. high, to the N.

At point for cor..

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with the original cor. stone deposited at base, for $\frac{1}{4}$ sec. cor., with brass cap marked

S 14
 $\frac{1}{4}$ S 23

1944

From this $\frac{1}{4}$ sec. cor., a large spring of clear water, bears S. 4° 05' E., 30.80 chs. dist.

Thence

S. 89° 43' W., between secs. 14 and 23.

Ascend over steep SE. slope broken by ledges.

9.00 Top of ascent on point of spur, 210 ft. above $\frac{1}{4}$ sec. cor., slopes SE.; descend over SW. slope.

15.60 Draw, 70 ft. below top of ascent, course S. 60° E.; ascend over steep NE. slope.

25.00 Top of steep ascent; thence along steep N. slope.

39.89 The cor. of secs. 14, 15, 22, and 23, 370 ft. above draw.

Land, mountainous.

Soil, gravelly and rocky mountain loam; 3rd rate.

No timber.

Undergrowth, sagebrush, oak, choke cherry, service berry, honeysuckle, and maple. Medium growth of grass and weeds.

Good grazing land.

N. 0° 20' E., between secs. 14 and 15.

Descend over N. slope, through dense undergrowth.

3.50 Draw, 30 ft. below sec. cor., course N. 80° E.; ascend over SE. slope.

26.00 Ridge, 300 ft. above sec. cor., bears NE. and SW.; descend

DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 3 E.

Chains

From the cor. of secs. 11, 12, 13, and 14.

S. 89° 51' W., between secs. 11 and 14.

Ascend over rocky SE. slope, through medium dense undergrowth.

11.00 Point of spur, 120 ft. above sec. cor., slopes S. 15° W.; descend steep W. slope.

24.90 Draw, 300 ft. below spur, course S. 30° E.; ascend steep E. slope.

35.00 Top of ascent, 350 ft. above draw, slopes N.; descend NW. slope, entering scattered timber.

39.09 Proportionate dist.; no evidence of $\frac{1}{4}$ sec. cor. found.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked

S 11
 $\frac{1}{4}$ S 14

1944

from which

An aspen, 10 ins. diam., bears S. 50° W., 4 lks. dist., marked $\frac{1}{4}$ S14BT.

Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.

40.00 Head of small draw, 40 ft. below top of ascent, course NE.; ascend over E. slope.

47.00 Ridge, 80 ft. above draw, bears N. and S.; descend over W. slope.

71.90 Small draw, course N. 75° W.; descend over NW. slope.

78.18 The cor. of secs. 10, 11, 14, and 15, 475 ft. below ridge.

Land, mountainous.

Soil, rocky and gravelly mountain loam; 3rd rate.

Timber, scattered aspen.

Undergrowth, sagebrush, choke cherry, maple, service berry, and honeysuckle. Medium growth of grass and weeds.

Good grazing land.

N. 0° 09' W., between secs. 10 and 11.

Descend over a NW. slope, through dense undergrowth.

8.80 Draw, 100 ft. below sec. cor., course N. 60° W.; ascend.

12.00 Spur, 130 ft. above draw, projects W.; descend.

16.00 Head of draw, 40 ft. below spur, course W.; ascend.

20.00 Spur, 30 ft. above draw, projects W.; descend.

35.90 Draw, 180 ft. below spur, course W.; ascend.

40.28 On S. slope, 100 ft. above draw.

The $\frac{1}{4}$ sec. cor., which is a cobblestone, 18x12x8 ins.,

DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 3 E.

Chains

marked with $\frac{1}{4}$ on W. face, firmly set and witnessed by a mound of stone, 3 ft. base, 2 ft. high, to the W.

At point for cor.

Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground to solid rock and in a mound of stone to top, with the original cor. stone deposited at base, for $\frac{1}{4}$ sec. cor. with brass cap marked

S10		S11
-----	--	-----

1944

Thence

N. $1^{\circ} 27' W.$, between secs. 10 and 11.

7.50 Spur, 170 ft. above $\frac{1}{4}$ sec. cor., projects N. $70^{\circ} W.$; descend.

12.50 Draw, 90 ft. below spur, course N. $70^{\circ} W.$; ascend.

20.00 Spur, 30 ft. above draw, slopes N. $80^{\circ} W.$; descend.

41.43 On NW. slope, 160 ft. below spur.

The cor. of secs. 2, 3, 10, and 11, which is a quartzite, 14x6x6 ins., marked with 5 notches on S., and 2 notches on E. edge, firmly set and witnessed by a mound of stone, 3 ft. base, 2 ft. high to the W.

At point for cor.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, with the original cor. stone deposited at base, for cor. of secs. 2, 3, 10, and 11, with brass cap marked

T7N R3E		
S 3		S 2
S10		S11

S10		S11
-----	--	-----

1944

Land, mountainous.

Soil, gravelly and rocky mountain loam; 3rd rate.

No timber.

Undergrowth, sagebrush, choke cherry, maple, and honeysuckle. Medium growth of weeds and grass.

Good grazing land.

From the cor. of secs. 1, 2, 11, and 12.

N. $89^{\circ} 55' W.$, between secs. 2 and 11.

Descend over a W. slope, through medium dense undergrowth.

9.50 Head of draw, course N. $70^{\circ} W.$; descend along N. slope.

20.00 Spur, 140 ft. below sec. cor., slopes N. $70^{\circ} W.$; descend over SW. slope.

39.52 On SW. slope, 400 ft. below sec. cor.

141
DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 3 E.

Chains

The $\frac{1}{4}$ sec. cor., which is a cobblestone, 16x14x10 ins., marked with $\frac{1}{4}$ on N. face, firmly set and witnessed by a mound of stone, 3 ft. base, 2 ft. high to the N.

At point for cor.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with the original cor. stone deposited at base, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{S 2}{S 11}$

1944

Thence

S. 89° 35' W., between secs. 2 and 11.

12.50 Draw, 200 ft. below $\frac{1}{4}$ sec. cor., course N. 70° W.; ascend.

29.00 Top of ascent, 100 ft. above draw, slopes N. 60° W.; descend.

37.71 The cor. of secs. 2, 3, 10, and 11, 600 ft. below $\frac{1}{4}$ sec. cor.

Land, mountainous.

Soil, gravelly and rocky mountain loam; 3rd rate.

No timber.

Undergrowth, sagebrush, maple, service berry, choke cherry and honeysuckle. Medium growth of grass and weeds.

Good grazing land.

from the cor. of secs. 2, 3, 34, and 35, on N. bdy. of Tp.

S. 1° 47' E., between secs. 2 and 3.

Along spur, through medium dense undergrowth.

5.00 Spur, projects SW.; descend over SE. slope.

27.50 Draw, 225 ft. below sec. cor., course SW.; ascend, entering scattered timber.

37.00 Leave timber, bears E. and W.

7.11 Proportionate dist., on NW. slope, 170 ft. above draw. No evidence of $\frac{1}{4}$ sec. cor. found.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked

$S 3 | S 2$

1944

stone, 3 ft. base, 2 ft. high, W. of cor. raise a mound of

44.00 Spur, 70 ft. above $\frac{1}{4}$ sec. cor., projects S. 30° W.; descend over SE. slope.

DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 3 E.

Chains

- 71.00 Old road, bears NE. and SW.
- 72.20 Draw, 400 ft. below spur, course SW.; ascend over NW. slope.
- 77.61 The cor. of secs. 2, 3, 10, and 11, 100 ft. above draw.
- Land, mountainous.
- Soil, gravelly and rocky mountain loam; 3rd rate.
- Timber, scattered aspen on portion of mile.
- Undergrowth, sagebrush, oak, maple, service berry, choke cherry, and honeysuckle. Medium growth of grass and weeds.
- Good grazing land.

From the cor. of secs. 3, 4, 33, and 34, on S. bdy. of Tp. N. 0° 27' W., between secs. 33 and 34.

Along steep E. slope through dense undergrowth.

- 3.00 Descend steep N. slope.
- 14.70 South Fork of Ogden River, stream of clear water, 40 lks. wide, in canyon, 220 ft. below sec. cor., course W.; ascend over rolling S. slope.
- 26.70 Draw, course SW.; enter cultivated land.
- 30.50 Barbed wire fence, bears N. 87° E., and S. 87° W.; leave cultivated land.
- 30.70 Graded road, bears N. 87° E., and S. 87° W.
- 30.90 Cor. of barbed wire fence, bears N., and S. 87° W.
- 31.30 Cor. of barbed wire fence, bears N., and N. 87° E.
- 39.88 On SW. slope, 200 ft. above river.

The $\frac{1}{4}$ sec. cor., which is a quartzite, 16x10x6 ins., marked with $\frac{1}{4}$ on W. face, firmly set and witnessed by a mound of stone, 3 ft. base, 2 ft. high, to the W.

At point for cor.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, and in a mound of stone to top, with the original cor. stone deposited at base, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$
S 33 | S 34
1944

Thence

- N. 0° 01' W., between secs. 33 and 34.
- 25.00 Spur, 50 ft. above $\frac{1}{4}$ sec. cor., slopes S. 60° E.; descend.
- 30.70 Draw, 50 ft. below spur, course SE.; ascend.
- 39.00 Spur, 170 ft. above draw, slopes SE.; descend.

DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 3 E.

Chains

entado

39.90

The cor. of secs. 27, 28, 33, and 34, which is a sandstone 20x8x8 ins., marked with 1 notch on S., and 3 notches on E. edge, firmly set and witnessed by a mound of stone, 3 ft. base, 2 ft. high, to the W.

At point for cor.

Set an iron post, 3 ft. long, .2 ins. diam., 27 ins. in the ground, with the original cor. stone deposited at base, for cor. of secs. 27, 28, 33, and 34, with brass cap marked

T7N	R3E
S28	S27
S33	S34

1944

Land, mountainous.
Soil, gravelly and rocky mountain loam; 3rd rate.
No timber.
Undergrowth, sagebrush, oak, maple, chokecherry, and honeysuckle. Medium growth of grass and weeds.
Good grazing land.

From the cor. of secs. 26, 27, 34, and 35.

S. 89° 58' W., between secs. 27 and 34.

Descend over NW. slope through medium dense undergrowth

1.50 Fork of South Fork of Ogden River, stream of clear water, 40 lks. wide, in canyon, 30 ft. below sec. cor., course S. 20° W.; ascend steep rocky E. slope.

2.00 Graded road, bears N. 23° E., and S. 23° W.

17.50 Spur, 600 ft. above river, projects S.; descend.

23.50 Draw, 120 ft. below spur, course S. 15° E.; ascend.

35.00 Spur, 310 ft. above draw, projects S.; descend.

40.19 On SW. slope, 110 ft. below spur.

Proportionate dist.; no evidence of $\frac{1}{4}$ sec. cor. found.

Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground to solid rock, and in a mound of stone to top, with a sandstone, 10x8x6 ins., marked X, deposited at base, for $\frac{1}{4}$ sec. cor., with brass cap marked

S 27
$\frac{1}{4}$ S 34

1944

44.50 Head of draw, 90 ft. below $\frac{1}{4}$ sec. cor., course S. 10° W.; thence along S. slope.

48.00 Spur, slopes S. 75° W.; descend along N. to NW. slopes

65.80 Old road, bears N. and S.

66.00 Draw, 220 ft. below spur, course S.; ascend.

DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 3 E.

Chains

- 68.50 Top of ascent, 30 ft. above draw, slopes S.; descend.
- 73.00 Draw, 30 ft. below top of ascent, course SE.; ascend.
- 80.38 The cor. of secs. 27, 28, 33, and 34, 150 ft. above draw.

Land, mountainous.
 Soil, gravelly and rocky mountain loam; 3rd rate.
 No timber.
 Undergrowth, sagebrush, scattered maple, oak, and service berry. Medium growth of grass and weeds. Good grazing land.

North, between secs. 27 and 28.

Descend along NE, slope, through dense undergrowth.


- 38.90 Draw, 50 ft. below sec. cor., course S. 15° E.; ascend.

- 39.88 On SW. slope, 30 ft. above draw.

The $\frac{1}{4}$ sec. cor., which is a quartzite, 12x8x5 ins., marked with $\frac{1}{4}$ on W. face, firmly set and witnessed by a mound of stone, 3 ft. base, 2 ft. high, to the W.

At point for cor.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with the original cor. stone deposited at base, for $\frac{1}{4}$ sec. cor., with brass cap marked



Thence


North, between secs. 27 and 28.

- 22.00 Spur, 400 ft. above $\frac{1}{4}$ sec. cor., projects S. 20° E.; thence along an east slope.

- 39.70 The cor. of secs. 21, 22, 27, and 28, which is a sandstone, 21x12x10 ins., marked with 2 notches on S., and 3 notches on E. edge, firmly set and witnessed by a mound of stone, 3 ft. base, 2 ft. high, to the W.

At point for cor.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, with the original cor. stone deposited at base, for cor. of secs. 21, 22, 27, and 28, with brass cap marked



Cor. stands at cor. of old fence line, bearing S., and W.

Land, mountainous.
 Soil, gravelly and rocky mountain loam; 3rd rate.
 No timber.

DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 3 E.

Chains

Undergrowth, dense sagebrush and scattered oak and maple.
Medium growth of grass and weeds. Good grazing land.

From the cor. of secs. 22, 23, 26, and 27.

N. 88° 38' W., between secs. 22 and 27.

Along a S. slope, through dense undergrowth.

6.50 Head of draw, 20 ft. below sec. cor., course S. 20° E.;
ascend over E. slope.

24.00 Spur, 150 ft. above sec. cor., slopes S.; descend over
SW. slope.

40.25 Proportionate dist., on SW. slope 100 ft. below spur.
No evidence of $\frac{1}{4}$ sec. cor. found.

Set an iron post, 3 ft. long, 1 in. diam., 24 ins. in the
ground, and in a mound of stone to top, with a sandstone,
6x6x4 ins., marked X, deposited at base, for $\frac{1}{4}$ sec. cor.,
with brass cap marked

$\frac{1}{4}$ S 22
S 27

1944

57.00 Draw, 200 ft. below sec. cor., course S.; ascend.

63.50 Spur, 180 ft. above draw, projects S. 20° E.; descend.

71.00 Old road in draw, 150 ft. below spur, course S. 20° E.;
ascend.

80.50 The cor. of secs. 21, 22, 27, and 28, 150 ft. above draw.

Land, mountainous.

Soil, gravelly and rocky mountain loam; 3rd rate.
No timber.

Undergrowth, sagebrush, and scattered oak and maple.
Medium growth of grass and weeds. Good grazing land.

N. 0° 37' E., between secs. 21 and 22.

Along an E. slope, through dense undergrowth.

10.60 Spur, projects W.; descend over NW. slope, entering
scattered timber.

28.60 Draw, 320 ft. below spur, course W.; ascend S. slope,
leaving timber.

38.52 Proportionate dist., on steep S. slope, 300 ft. above
draw. No evidence of $\frac{1}{4}$ sec. cor. found.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the
ground, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$
S21 | S22

1944

DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 3 E.

Chains

raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

43.00 Spur, 100 ft. above 1/4 sec. cor., projects S. 80° W.; descend steep NW. slope, entering timber.

65.00 Draw, 450 ft. below spur, course S. 70° W.; ascend S. slope, leaving timber.

75.60 Point of spur, 300 ft. above draw, slopes SW.; descend.

77.04 The cor. of secs. 15, 16, 21, and 22, which is a quartzite, 14x12x8 ins., marked with 3 notches on S. and E. edges, firmly set and witnessed by a mound of stone, 3 ft. base, 2 ft. high, to the W.

At point for cor.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, with the original cor. stone deposited at base, for cor. of secs. 15, 16, 21, and 22, with brass cap marked

T7N R3E
S16 | S15
S21 | S22

1944

Land, mountainous.

Soil, gravelly and rocky mountain loam; 3rd rate.

Timber, aspen on portions of mile.

Undergrowth, sagebrush, oak, choke cherry, service berry, and honeysuckle. Medium growth of grass and weeds.

Good grazing land.

From the cor. of secs. 14, 15, 22, and 23.

N. 89° 57' W., between secs. 15 and 22.

Ascend over NE. slope, through dense undergrowth.

22.00 Ridge, 300 ft. above sec. cor., bears N. and S.; trail along ridge; descend over NW. slope.

39.75 On NW. slope, 450 ft. below ridge.

The 1/4 sec. cor., which is a sandstone, 24x14x10 ins., marked with 1/4 on N. face, firmly set and witnessed by a mound of stone, 3 ft. base, 2 ft. high, to the N.

At point for cor.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with the original cor. stone deposited at base, for 1/4 sec. cor., with brass cap marked

1/4 S 15
S 22

1944

Thence

S. 88° 46' W., between secs. 15 and 22.

DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 3 E.

Chains

521210

- 14.30 Draw, 140 ft. below 2 sec. cor., course S. 50° W.; ascend over SE. slope.
- 15.00 Spur, 100 ft. above draw, projects SW.; descend.
- 16.02 The cor. of secs. 15, 16, 21, and 22.

Land, mountainous.
 Soil, gravelly and rocky mountain loam; 3rd rate.
 No timber.
 Under growth, sagebrush, oak, maple, choke cherry, and honeysuckle. Medium growth of grass and weeds. Good grazing land.

N. 0° 04' E., between secs. 15 and 16.

Descend over NW. slope through dense undergrowth.

- 17.29 Proportionate dist., on NW. slope, 300 ft. below sec. cor. No evidence of 2 sec. cor. found.

Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground to solid rock, and in a mound of stone to top, with a sandstone, 6x6x5 ins., marked X, deposited at base, for 2 sec. cor., with brass cap marked

S16 | S15
 1944

- 18.20 Beaver Creek, a stream of clear water, 5 lks. wide, in canyon, 30 ft. below 2 sec. cor., course S. 30° W.; ascend over SE. slope.
- 19.00 Dilled highway, bears N. 36° E., and S. 36° W.
- 20.50 On SE. slope, 450 ft. above creek.

The cor. of secs. 9, 10, 15, and 16, which is a sandstone, 14x12x7 ins., marked with 4 notches on S., and 3 notches on E. edge, firmly set and witnessed by a mound of stone, 7 ft. base, 2 ft. high, to the W.

At point for cor.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, with the original cor. stone deposited at base, for cor. of secs. 9, 10, 15, and 16, with brass cap marked

T7N R3E
 S 9 | S10
 S16 | S15
 1944

Land, mountainous.
 Soil, gravelly and rocky mountain loam; 3rd rate.
 No timber.
 Under growth, sagebrush, and scattered oak, service berry, choke cherry, and honeysuckle. Medium growth of grass and weeds. Good grazing land.

DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 3 E.

Chains

- From the cor. of secs. 10, 11, 14, and 15.
 S. 88° 21' W., between secs. 10 and 15.
 Descend over NW. slope through dense undergrowth.
- 5.50 Head of small draw, 90 ft. below sec. cor., course NW.; ascend.
- 9.00 Spur, 40 ft. above draw, slopes NW.; descend over SW. slope.
- 14.90 Draw, 250 ft. below spur, course NW.; ascend over NE. slope.
- 35.00 Spur, 160 ft. above draw, slopes NW.; descend.
- 39.58 On W. slope, 100 ft. below spur.

The $\frac{1}{4}$ sec. cor., which is a sandstone, 20x18x8 ins., marked with $\frac{1}{4}$ on N. face, firmly set and witnessed by a mound of stone, 3 ft. base, 2 ft. high, to the N.

At point for cor.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with the original cor. stone deposited at base, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$ S 10
 S 15

1944

Thence

- N. 89° 54' W., between secs. 10 and 15.
- 9.60 Beaver Creek, a stream of clear water, 10 lks. wide, in canyon, 250 ft. below $\frac{1}{4}$ sec. cor., course S. 35° W.; ascend over SE. slope.
- 11.40 Oiled highway, bears N. 35° E., and S. 35° W.
- 39.92 The cor. of secs. 9, 10, 15, and 16, 400 ft. above canyon.

Land, mountainous.

Soil, gravelly and rocky mountain loam; 3rd rate.

No timber.

Undergrowth, sagebrush, mountain laurel, service berry, maple, and honeysuckle. Medium growth of grass and weeds. Good grazing land.

N. 0° 03' E., between secs. 9 and 10.

Ascend over rolling SE. slope through dense undergrowth.

- 6.00 Top of ascent, 50 ft. above sec. cor., slopes SE.; descend
- 11.80 Head of small draw, 50 ft. below top of ascent, course S. 60° E.; ascend.
- 15.50 Spur, 40 ft. above draw, slopes S. 60° E.; descend.
- 21.60 Draw, 190 ft. below spur, course S. 60° E.; ascend.
- 39.96 On SW. slope, 150 ft. above draw.

148

48

DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 3 E.

Chains

enlar10

The 1/4 sec. cor., which is a quartzite, 17x10x6 ins., marked with 1/4 on W. face, firmly set and witnessed by a mound of stone, 3 ft. base, 2 ft. high, to the W.

At point for cor.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with the original cor. stone deposited at base, for 1/4 sec. cor., with brass cap marked

1/4
S 9 | S10
1944

Thence

N. 0° 07' E., between secs. 9 and 10.

17.00 Spur, 150 ft. above 1/4 sec. cor., slopes S. 35° E.; descend

27.80 Draw, 60 ft. below spur, course S. 35° E.; ascend.

39.79 On spur, 200 ft. above draw, slopes SE.

The cor. of secs. 3, 4, 9, and 10, which is a quartzite, 20x12x10 ins., marked with 5 notches on S., and 3 notches on E. edge, firmly set and witnessed by a mound of stone, 3 ft. base, 2 ft. high, to the W.

At point for cor.

Set an iron post, 3 ft. long, 2 ins. diam., 20 ins. in the ground to solid rock, and in a mound of stone to top, with the original cor. stone deposited at base, for cor. of secs. 3, 4, 9, and 10, with brass cap marked

T7N R3E
S 4 | S 3
S 9 | S10
1944

Land, mountainous.

Soil, gravelly and rocky mountain loam; 3rd rate.

No timber.

Undergrowth, dense sagebrush, and scattered oak, maple, choke cherry, service berry, mountain laurel, and honeysuckle. Medium growth of grass and weeds. Good grazing land.

From the cor. of secs. 2, 3, 10, and 11.

S. 86° 52' W., between secs. 3 and 10.

Descend NW. slope through dense undergrowth.

5.50 Draw, 130 ft. below sec. cor., old road along draw, course SW.; ascend.

12.00 Top of ascent on point of spur, 50 ft. above draw, slopes S.; descend over SW. slope.

32.00 Oiled highway, bears N. 20° E., and S. 20° W.

DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 3 E.

Chains

33.80 Beaver Creek, a stream of clear water, 10 lks. wide, in canyon, 160 ft. below point of spur, course S. 20° W.; ascend.

38.13 On SE. slope, 40 ft. above creek.

The $\frac{1}{4}$ sec. cor., which is a quartzite, 18x10x8 ins., marked with $\frac{1}{4}$ on N. face, firmly set and witnessed by a mound of stone, 3 ft. base, 2 ft. high, to the W.

At point for cor.

Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground to solid rock, and in a mound of stone to top, with the original cor. stone deposited at base, for $\frac{1}{4}$ sec. cor., with brass cap marked

$$\frac{S 3}{S 10}$$

1944

Thence

S. 88° 47' W., between secs. 3 and 10.

20.00 Spur, 480 ft. above $\frac{1}{4}$ sec. cor., slopes SE.; descend.

28.60 Draw, 100 ft. below spur, course SE.; ascend.

39.94 The cor. of secs. 3, 4, 9, and 10, 330 ft. above draw.

Land, mountainous.

Soil, gravelly and rocky mountain loam; 3rd rate.

No timber.

Undergrowth, dense sagebrush, and scattered choke cherry, maple, and service berry. Medium growth of grass and weeds. Good grazing land.

From the cor. of secs. 3, 4, 33, and 34, on N. bdy. of Tp.

S. 0° 10' W., between secs. 3 and 4.

Ascend over N. slope, through dense undergrowth.

4.00 Spur, 60 ft. above sec. cor., projects S. 70° E.; descend.

16.80 Draw, 260 ft. below spur, course S. 70° E.; ascend.

22.00 Spur, 25 ft. above draw, slopes SE.; descend.

31.00 Draw, 70 ft. below spur, course SE.; ascend.

40.28 On NE. slope, 100 ft. above draw.

The $\frac{1}{4}$ sec. cor., which is a cobblestone, 14x12x6 ins., marked with $\frac{1}{4}$ on W. face, firmly set and witnessed by a mound of stone, 3 ft. base, 2 ft. high, to the W.

At point for cor.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins in the ground, with the original cor. stone deposited at base, for $\frac{1}{4}$ sec. cor., with brass cap marked

DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 3 E.

Chains

21220

S 4 | S 3

1944

From which.

An aspen, 7 ins. diam., bears S. 85° E., 17 lks. dist., marked $\frac{1}{2}$ S3E.

An aspen, 4 ins. diam., bears N. 87° W., 16 lks. dist., marked $\frac{1}{2}$ S4E.

Thence.

S. 0° 06' W., between secs. 3 and 4.

11.50 Spur, 100 ft. above $\frac{1}{2}$ sec. cor., slopes SE.; descend.

27.00 Draw, 250 ft. below spur, course SE.; ascend.

32.00 The cor. of secs. 3, 4, 9, and 10, 120 ft. above draw.

Land, mountainous.

Soil, gravelly and rocky mountain loam; 3rd rate.

Timber, scattered aspen on portion of mile.

Undergrowth, sagebrush, oak, choke cherry, service berry, maple, and honeysuckle. Medium growth of grass and weeds.

Good grazing land.

from the cor. of secs. 4, 5, 32, and 33 on S. bdy. of Tp.

N. 1° 30' E., between secs. 32 and 33.

Over bottom land through dense undergrowth.

1.50 South fork of Ogden river, stream of clear water, 60 lks. wide, course W.; ascend.

2.50 Rim of bench, 30 ft. high, bears E. and W.; thence over rolling bench, entering cultivated land.

10.00 Barbed wire fence, bears N. 55° E., and S. 55° W.; leave cultivated land; ascend over SE. slope.

11.70 Dilled Highway, bears N. 55° E., and S. 55° W.

12.10 Barbed Wire Fence, bears N. 55° E., and S. 55° W.

13.00 Ascend gradually along rolling E. slope.

14.00 on rolling E. slope, 200 ft. above sec. cor., and in fence line, bears N., and S. 0° W.

The $\frac{1}{2}$ sec. cor., which is a quartzite, 18x10x7 ins., marked with $\frac{1}{2}$ on N. face, firmly set and witnessed by a mound of stone, 3 ft. base, 2 ft. high, to the W.

At point for cor.

set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground to solid rock, and in a mound of stone to top, with the original cor. stone deposited at base, for $\frac{1}{2}$ sec. cor. with brass cap marked

Chains

$\frac{1}{4}$
 S32 | S33
 1944

Thence

N. 0° 01' E., between secs. 32 and 33.

Along rolling E. slope, and along barbed wire fence.

1.00 Descend steep N. slope, bears N. 80° W., and S. 80° E.

3.20 Pine Creek, a stream of clear water, 10 lks. wide, in draw, 60 ft. below $\frac{1}{4}$ sec. cor., course S. 70° E.; ascend over rolling SE. slope.

22.00 Swale, course SE.

39.87 On rolling SE. slope, 160 ft. above creek, and at cor. of fences, bearing N., S., and E.

The cor. of secs. 28, 29, 32, and 33, which is a quartzite, 20x12x6 ins., marked with 1 notch on S., and 4 notches on E. edge, firmly set and unwitnessed.

At point for cor.

Set an iron post, 3 ft. long, 2 ins. diam., 20 ins. in the ground to solid rock, and in a mound of stone to top, with the original cor. stone deposited at base, for cor. of secs. 28, 29, 32, and 33, with brass cap marked

T7N R3E
 S29 | S28
 S32 | S33

1944

Land, rolling mountains.

Soil, gravelly and rocky mountain loam; 3rd rate.
No timber.

Undergrowth, dense sagebrush. Medium growth of grass and weeds. Good grazing land.

from the cor. of secs. 27, 28, 33, and 34.

N. 89° 55' W., between secs. 28 and 33.

Ascend over NE. slope, through dense undergrowth.

1.00 Spur, 10 ft. above sec. cor., projects S. 30° E.; descend.

10.00 Draw, 60 ft. below spur, course S. 30° E.; ascend over E. slope.

19.50 Spur, 230 ft. above draw, projects S.; descend.

28.70 Draw, 160 ft. below spur. course S.; ascend.

37.00 Spur, 100 ft. above draw, projects S. 20° W., descend.

39.53 Proportionate dist., on W. slope, 50 ft. below spur, and at cor. of old woven wire fence, bearing N. and W. No evidence of the $\frac{1}{4}$ sec. cor. found.

DEPENDENT RESURVEY OF SUBDIVISION OF T. 7. N., R. 3. E.

Chains

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$ S 28
S 33

1944

stone, 3 ft. base, 2 ft. high, N. of cor. raise a mound of

54.30 Beaver Creek, a stream of clear water, 20 lks. wide, in canyon, 480 ft. below $\frac{1}{4}$ sec. cor., course S. 10° W.; ascend over E. slope.

56.75 Cor. of fence, bearing E., and S. 10° 30' W.

57.30 Oiled highway, bears N. 10° 30' E. and S. 10° 30' W.

58.00 Woven and barbed wire fence, bears N. 10° 30' E., and W.

79.06 The cor. of secs. 28, 29, 32, and 33, 175 ft. above creek.

Land, mountainous.

Soil, gravelly and rocky mountain loam; 3rd rate.

No timber.

Undergrowth, dense sagebrush. Medium growth of grass and weeds. Good grazing land.

N. 0° 02' W., between secs. 28 and 29.

Ascend gradually along rolling E. slope, through dense undergrowth.

30.40 Descend over N. slope, bears S. 80° E. and N. 80° W.

38.90 Stream of clear water, 3 lks. wide, in draw, 50 ft. below point of descent, course S. 60° E.; ascend over rolling SE. slope.

39.58 The $\frac{1}{4}$ sec. cor., which is a quartzite, 16x12x8 ins., marked with $\frac{1}{4}$ on W. face, firmly set and witnessed by a mound of stone, 3 ft. base, 2 ft. high, to the W.

At point for cor.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with the original cor. stone deposited at base, for $\frac{1}{4}$ sec. cor., with brass cap marked

S29 | S28

1944

Cor. stands in woven and barbed wire fence, bears N. and S. Thence

N. 0° 05' E., between secs. 28 and 29.

39.76 On rolling SE. slope, 260 ft. above $\frac{1}{4}$ sec. cor., at cor. of woven and barbed wire fences, bearing N., S., and E.

The cor. of secs. 20, 21, 28, and 29, which is a cobblestone, 18x13x7 ins., marked with 2 notches, on S., and 4

DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 3 E.

Chains

notches on E. edge, firmly set and unwitnessed.

At point for cor.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, with the original cor. stone deposited at base, for cor. of secs. 20, 21, 28, and 29, with brass cap marked

T7N R3E	
S20	S21
S29	S28

1944

Land, mountainous; rolling slopes.

Soil, gravelly and rocky mountain loam; 3rd rate.

No timber.

Undergrowth, dense sagebrush. Medium growth of grass and weeds. Good grazing land.

From the cor. of secs. 21, 22, 27, and 28.

S. 89° 57' W., between secs. 21 and 28.

Ascend over E. slope through dense undergrowth.

- 1.00 Spur, 10 ft. above sec. cor.; projects S.; descend over SW. slope.
- 24.00 Draw, 510 ft. below spur, course SW.; ascend over SE. slope.
- 39.10 Barbed wire fence, bears S., and N. 16 lks. dist. to cor., thence E.
- 39.40 Proportionate dist., on spur, 160 ft. above draw, projects SW. No evidence of $\frac{1}{4}$ sec. cor. found.
- Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground to solid rock, and in a mound of stone to top, with a sandstone, 8x5x5 ins., marked X, deposited at base, for $\frac{1}{4}$ sec. cor., with brass cap marked

S 21
$\frac{1}{4}$ S 28

1944

Descend over steep W. slope.

- 52.00 Beaver Creek, a stream of clear water, 10 lks. wide, in canyon, 460 ft. below $\frac{1}{4}$ sec. cor., course S.; ascend.
- 52.70 Oiled highway, bears S. 14° E., and N. 14° W.
- 53.35 Barbed wire fence, bears N. 14° W., S. 14° E., and W.
- 78.80 The cor. of secs. 20, 21, 28, and 29, 380 ft. above creek.

Land, mountainous.

Soil, gravelly and rocky mountain loam; 3rd rate.

No timber.

Undergrowth, dense sagebrush, and scattered maple, oak, and choke cherry. Medium growth of grass and weeds. Good grazing land.

DEPARTMENT RESURVEY OF SUBDIVISION OF TOWN OF ...

Chains

N. 0° 01' E., between sec. 20 and 21. ...

Ascend over rolling SE. slope, through dense undergrowth

6.00 Top of ascent, 40 ft. above sec. cor. slopes E.; descend over SE. slope.

21.50 Small draw, 200 ft. below sec. cor., course E.; ascend.

31.00 Top of ascent, 75 ft. above draw, slopes E.; descend.

36.85 On SE. slope, 200 ft. below sec. cor.

The $\frac{1}{2}$ sec. cor., which is a cobblestone, 18x12x9 ins., marked with $\frac{1}{2}$ on N. face, firmly set and witnessed by a mound of stone, 3 ft. base, 2 ft. high, to the N.

At point for cor.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with the original cor. stone deposited at base, for $\frac{1}{2}$ sec. cor., with brass cap marked

S20 | S21

1944

An aspen, 6 ins. diam., bears S. 84° 30' E., 87 lks. dist., marked S21 BT.

An aspen, 6 ins. diam., bears N. 44° 45' W., 166 lks. dist., marked S20 BT.

Thence

N. 0° 01' E., between secs. 20 and 21.

2.70 Birch Creek, a stream of clear water, 3 lks. wide, in draw, 10 ft. below $\frac{1}{2}$ sec. cor., course SE. from N.; thence along E. side of creek.

6.00 Junction of draw from N. 20° E., with Birch Creek, from NW.; ascend over SE. slope.

16.20 Cor. of net and barbed wire fence, bearing N., S., and S. 64° 30' E.

35.00 Top of ascent, 300 ft. above $\frac{1}{2}$ sec. cor., slopes E.; thence along E. slope.

39.89 On E. slope, at cor. of fence, bearing S., and W.

The cor. of secs. 16, 17, 20, and 21, which is a quartzite 20x12x12 ins., marked with 3 notches on S., and 4 notches on E. edge, firmly set and unwitnessed.

At point for cor.

Set an iron post, 3 ft. long, 2 in. diam., 27 ins. in the ground, with the original cor. stone deposited at base, for cor. of secs. 16, 17, 20, and 21, with brass cap marked

S75 | S22

S27 | S26

S20 | S21

1944

raise a mound

Chains

stone, 3 ft. base, 2 ft. high, W. of cor.

Land, mountainous.

Soil, gravelly and rocky mountain loam; 3rd rate.

Timber, scattered aspen along Birch Creek.

Undergrowth, sagebrush, and scattered oak, maple, service berry, choke cherry, and honeysuckle. Medium growth of grass and weeds. Good grazing land.

From the cor. of secs. 15, 16, 21, and 22.

S. 89° 24' W., between secs. 16 and 21.

Descend over steep NW. slope, through dense undergrowth.

14.40 Beaver Creek, a stream of clear water, 15 lks. wide, in canyon, 360 ft. below sec. cor., course S. 20° W.; ascend over SE. slope.

18.60 Oiled highway, bears N. 25° E., and S. 25° W.

28.00 Spur, 160 ft. above creek, projects S.; descend.

31.00 Rock Creek, a stream of clear water, 7 lks. wide, in draw, 80 ft. below spur, course S. 20° E.; ascend.

39.56 On spur, 150 ft. above creek, projects SE.

The $\frac{1}{4}$ sec. cor., which is a quartzite, 14x8x7 ins., marked with $\frac{1}{4}$ on N. face, firmly set and witnessed by a mound of stone, 3 ft. base, 2 ft. high, to the N.

At point for cor.

Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground to solid rock, and in a mound of stone to top, with the original cor. stone deposited at base, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$ S 16
S 21

1944

Thence

N. 89° 56' W., between secs. 16 and 21.

Descend over gentle W. slope.

6.10 Head of draw, 15 ft. below $\frac{1}{4}$ sec. cor., course SE.; ascend.

19.00 Spur, 270 ft. above draw, projects S.; descend.

21.20 Draw, 15 ft. below spur, course SW., from N.; ascend.

28.00 Top of ascent, 50 ft. above draw, slopes S.; descend.

33.30 Draw, 20 ft. below top of ascent, course S. 20° E., from the N.; ascend.

39.97 The cor. of secs. 16, 17, 20, and 21, 120 ft. above draw.

Land, mountainous.

Soil, gravelly and rocky mountain loam; 3rd rate.

DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 3 E.

Chains

No timber.

Undergrowth, sagebrush, choke cherry, service berry, oak, honeysuckle, and maple. Medium growth of grass and weeds.

Good grazing land.

N. 0° 02' W., between secs. 16 and 17.

Descend gradually along E. slope, through dense undergrowth

9.40 Draw, 20 ft. below sec. cor., course SE.; ascend.

24.50 Spur, 170 ft. above draw, projects SE.; descend over NE. slope.

35.60 Stock trail, bears SE. and NW.

39.89 On NE. slope, 200 ft. below spur.

The $\frac{1}{4}$ sec. cor., which is a quartzite, 14x10x9 ins., marked with $\frac{1}{4}$ on W. face, firmly set and witnessed by a mound of stone, 3 ft. base, 2 ft. high, to the W.

At point for cor.

Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground to solid rock, and in a mound of stone to top, with the original cor. stone deposited at base, for $\frac{1}{4}$ sec. cor. with brass cap marked

S17 | S16

1944

from which

An aspen, 4 ins. diam., bears N. 54° 15' E., 41 lks. dist., marked $\frac{1}{4}$ S16BT.A maple, 4 ins. diam., bears N. 35° W., 13 lks. dist., marked $\frac{1}{4}$ S17BT.

Thence

N. 0° 10' E., between secs. 16 and 17.

3.00 Stream of clear water, 2 lks. wide, in canyon, 30 ft. below $\frac{1}{4}$ sec. cor., course SE.; ascend over SW. slope.

18.30 Spur, 340 ft. above canyon, projects SE.; descend along an E. slope.

23.70 Draw, 120 ft. below spur, course SE.; ascend.

36.70 Spur, 30 ft. above draw, slopes SE.; descend.

40.12 On E. slope, 30 ft. below spur.

The cor. of secs. 8, 9, 16, and 17, which is a quartzite, 14x7x6 ins., marked with 4 notches on S., and E. edges, firmly set and witnessed by a mound of stone, 3 ft. base, 2 ft. high, to the W.

At point for cor.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, with original cor. stone deposited at base, for

DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 3 E.

Chains

cor. of secs. 8, 9, 16, and 17, with brass cap marked

T7N	R3E
S 6	S 9
S17	S16

1944

Land, mountainous.

Soil, rocky dark mountain loam; 3rd rate.

Timber, aspen along canyon.

Undergrowth, sagebrush, choke cherry, service berry, oak, maple, and honeysuckle. Medium growth of grass and weeds. Good grazing land.

From the cor. of secs. 9, 10, 15, and 16.

N. 89° 42' W., between secs. 9 and 16.

Ascend over E. slope, through dense undergrowth.

4.00 Spur, 50 ft. above sec. cor., projects S., from N. 70° E.; descend.

14.80 Draw, 190 ft. below spur, course SW., from N.; ascend.

27.00 Spur, 150 ft. above draw, slopes S.; descend.

32.90 Draw, 100 ft. below spur, course S. 10° E.; ascend.

39.82 On E. side of top of spur, 120 ft. above draw.

The 3 sec. cor., which is a quartzite, 10x10x10 ins., marked with 3 on N. face, firmly set and witnessed by a mound of stone, 3 ft. base, 2 ft. high, to the N.

At point for cor.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with the original cor. stone deposited at base, for 3 sec. cor., with brass cap marked.

8 9
S 11

1944

Thence

West, between secs. 9 and 16.

0.50 Spur, projects S. 5° E.; descend.

16.80 Rock Creek, a stream of clear water, 4 lks. wide, in canyon, 75 ft. below 3 sec. cor., course S. 20° E.; ascend.

39.82 The cor. of secs. 8, 9, 16, and 17, 410 ft. above creek.

Land, mountainous.

Soil, gravelly and rocky mountain loam; 3rd rate. No timber.

Undergrowth, dense sagebrush, and scattered maple and mountain laurel. Medium growth of grass and weeds. Good grazing land.

DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 3 E.

Chains

- N. 0° 01' E., between secs. 8 and 9.
- Descend over NE. slope, through dense undergrowth.
- 12.00 Draw, 160 ft. below sec. cor., course SE.; ascend.
- 20.00 Spur, 180 ft. above draw, slopes SE.; descend.
- 24.20 Draw, 60 ft. below spur, course E.; ascend.
- 27.60 Spur, 30 ft. above draw, slopes E.; descend.
- 33.50 Draw, 120 ft. below spur, course E.; ascend.
- 39.88 Proportionate dist.; no evidence of $\frac{1}{4}$ sec. cor. found.
 Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground to solid rock, and in a mound of stone to top, with a quartzite, 9x6x3 ins., marked X, deposited at base, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$
 S 8 | S 9
 1944
- 42.50 Spur, 180 ft. above draw, slopes S. 70° E., from NW.; descend.
- 47.30 Draw, 65 ft. below spur, course S. 70° E.; ascend.
- 53.50 Spur, 140 ft. above draw, slopes S. 60° E., from the NW.; descend.
- 57.30 Draw, 60 ft. below spur, course S. 60° E.; ascend.
- 63.50 Spur, 90 ft. above draw, slopes S. 60° E.; descend.
- 64.00 Enter heavy timber, bears NW. and SE.
- 79.76 On NE. slope, 40 ft. below spur.
 The cor. of secs. 4, 5, 8, and 9, which is a gray quartzite 19x12x7 ins., marked with 5 notches on S., and 4 notches on E. edge, firmly set and witnessed by a mound of stone, 3 ft. base, 2 ft. high, to the W.
 At point for cor.
 Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, with the original cor. stone deposited at base for cor. of secs. 4, 5, 8, and 9, with brass cap marked

T7N R3E
 S 5 | S 4
 S 8 | S 9
 1944

 From which
 An aspen, 8 ins. diam., bears N. 63° E., 12 lks. dist., marked T7NR3ES4BT.
 An aspen, 6 ins. diam., bears S. 48° 45' E., 31 lks. dist., marked T7NR3ES9BT.
 An aspen, 6 ins. diam., bears S. 43° 45' W., 17 lks. dist., marked T7NR3ES8BT.

DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 3 E.

Chains

An aspen, 4 ins. diam., bears N. 35° W., 39 lks. dist., marked T7NR3ES5BT.

Land, mountainous.

Soil, rocky dark mountain loam; 3rd rate.

Timber, dense aspen and scattered fir on portion of mile.

Undergrowth, sagebrush, chokecherry, service berry, maple and honeysuckle. Medium growth of weeds and grass.

Good grazing land.

From the cor. of secs. 3, 4, 9, and 10,

N. 89° 54' W., between secs. 4 and 9.

Descend over SW. slope, through dense undergrowth.

9.50 Draw, 40 ft. below sec. cor., course SE.; ascend.

23.50 Spur, 260 ft. above draw, projects SE.; descend.

39.78 Proportionate dist., on SW. slope, 200 ft. below spur. No evidence of $\frac{1}{4}$ sec. cor, found.

Set an iron post, 3 ft. long, 1 in. diam., 14 ins. in the ground to solid rock, and in a mound of stone to top, with a quartzite stone, 6x6x3 ins., marked X, deposited at the base, for $\frac{1}{4}$ sec. cor., with brass cap marked

S 4

S 9

1944

42.40 Draw, 60 ft. below $\frac{1}{4}$ sec. cor., course S. 20° E.; ascend.

60.00 Spur, 270 ft. above draw, projects S., from N. 25° W.; descend.

65.75 Head of draw, 60 ft. below spur, course S. 10° W.; ascend.

69.00 Spur, 10 ft. above draw, slopes S. 10° W.; descend, entering dense timber, bears N. and S.

78.40 Rock Creek, a stream of clear water, 4 lks. wide, in canyon, 240 ft. below spur, course S. 15° E.; ascend.

79.56 The cor. of secs. 4, 5, 8, and 9.

Land, mountainous.

Soil, rocky dark mountain loam; 3rd rate.

Timber, dense aspen on portion of mile.

Undergrowth, sagebrush, chokecherry, willows, honeysuckle, and patches of maple. Medium growth of grass and weeds.

Good grazing land.

From the cor. of secs. 4, 5, 32, and 33, on N. bdy. of Tp.

S. 0° 10' E., between secs. 4 and 5.

Over rolling top of mountain, through medium dense timber and dense undengrowth.

2.40 Leave timber and enter dense sagebrush opening, bears NW.

160

DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 3 E.

Chains

- and SE.
- 3.50 Unimproved road, bears N. 15° W. and S. 15° E.
- 9.70 Head of draw, course SW.
- 12.00 Enter dense timber, bears NE. and SW.
- 16.50 Descend over SW. slope, leaving top of mountain, bears NW. and SE.
- 40.70 On SW. slope, 150 ft. below sec. cor.

The $\frac{1}{4}$ sec. cor., which is a quartzite stone, 15x10x6 ins. marked $\frac{1}{4}$ on W. face, firmly set and witnessed by a mound of stone, 3 ft. base, 2 ft. high, to the W.

At point for cor.

- Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with the original stone deposited at the base, for $\frac{1}{4}$ sec. cor., with brass cap marked.

$\frac{1}{4}$
 S 5 | S 4
 1944

from which

An aspen, 5 ins. diam., bears N. 59° E., 22 lks. dist., marked $\frac{1}{4}$ S4BT.

An aspen, 5 ins. diam., bears S. 72° W., 30 lks. dist., marked $\frac{1}{4}$ S5BT.

Thence,

- South, between secs. 4 and 5.
- 12.00 Leave timber, bears NW. and SE.
- 21.50 Enter dense timber, bears NW. and SE.
- 29.30 Stock trail, bears N. 70° E. and S. 70° W.
- 30.00 Draw, 250 ft. below $\frac{1}{4}$ sec. cor., course S. 70° W.; ascend.
- 31.00 Top of ascent, 20 ft. above draw, slopes W.; descend.
- 33.40 Stock trail, bears N. 15° W. and S. 15° E.
- 45.10 Rock Creek, a stream of clear water, 4 lks. wide, in canyon, 60 ft. below top of ascent, course S. 15° E.; ascend.
- 39.00 The cor. of secs. 4, 5, 8, and 9, 15 ft. above creek.

Land, mountainous.

Soil, rocky dark mountain loam; 3rd rate.

Timber, dense aspen on portions of mile.

Undergrowth, sagebrush, chokecherry, willows and honeysuckle. Medium growth of grass and weeds.

Good grazing land.

From the cor. of secs. 5, 6, 31, and 32, on S. bdy. of Tp. N. 1° 33' E., between secs. 31 and 32.

DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 3 E.

Chains	
	From the cor. of secs. 28, 29, 32, and 33. S. 89° 51' W., between secs. 29 and 32. Ascend over rolling SE. slope, through dense sagebrush.
8.00	Top of ascent, 60 ft. above sec. cor., slopes SE.; descend.
10.20	Small draw, 30 ft. below top of ascent, course SE.; ascend.
38.00	Top of ascent, 190 ft. above draw, slopes SE.; descend.
40.07	On SW. slope, 10 ft. below top of ascent. The $\frac{1}{4}$ sec. cor., which is a quartzite, 15x10x8 ins., marked with $\frac{1}{4}$ on N. face, firmly set in the ground and mound of stone. At point for cor. Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with the original cor. stone deposited at base, for $\frac{1}{4}$ sec. cor., with brass cap marked $\begin{array}{r} \frac{1}{4} \text{ S } 29 \\ \hline \text{S } 32 \\ 1944 \end{array}$
	Thence N. 89° 57' W., between secs. 29 and 32. Descend over SW. to S. slope.
17.50	Enter dense oak, maple, choke cherry, service berry undergrowth, and scattered aspen timber, bears N. and S.
34.00	Enter dense sagebrush, bears NW. and SE.
40.05	The cor. of secs. 29, 30, 31, and 32, 90 ft. below $\frac{1}{4}$ sec. cor. Land, mountainous; rolling slopes. Soil, rocky dark mountain loam; 3rd rate. Timber, scattered aspen on portion of mile. Undergrowth, sagebrush, oak, service berry, choke cherry, and maple. Medium growth of grass and weeds. Good grazing land.
	N. 89° 41' W., between secs. 30 and 31. Along rolling S. slope, through dense sagebrush.
10.00	Descend over rolling SW. slope, bears NW. and SE.
16.70	Old road, bears N. 10° W. and S. 10° E.
21.00	Enter scattered timber and tall undergrowth.
22.70	Pine Creek, a stream of clear water, 6 lks. wide, in canyon, 30 ft. below sec. cor., course SE.; ascend over NE. slope.
39.90	On NE. slope, 300 ft. above creek.


DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 3 E.

Chains

The 1/4 sec. cor., which is a quartzite, 19x14x6 ins., marked with 1/4 on N. face, firmly set and unwitnessed.

At point for cor.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with the original stone deposited at base, for 1/4 sec. cor., with brass cap marked



1944

raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.


Thence

N. 89° 51' W., between secs. 30 and 31.

- 1.00 Spur, 10 ft. above 1/4 sec. cor., projects SE.; descend.
- 15.00 Fork of draws, from NE. and NW., course S., 210 ft. below spur; ascend.
- 19.00 Spur, 60 ft. above draw, projects S.; descend.
- 22.60 Draw, 40 ft. below spur, course S.; ascend.
- 27.50 Spur, 20 ft. above draw, projects S.; descend.
- 33.70 Stream of clear water, 2 lks. wide, in draw, 70 ft. below spur, course S.; ascend.
- 38.00 Spur, 60 ft. above draw, slopes S.; descend.
- 45.20 Draw, 60 ft. below spur, course SE.; ascend over E. slope.
- 51.99 The closing cor. of secs. 30 and 31, which is a sandstone, 16x12x6 ins., marked with 5 notches on N., 1 notch on S. edge, and CC on E. face, firmly set and witnessed by a mound of stone, 3 ft. base, 2 ft. high to the E.

At point for cor.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, with the original cor. stone deposited at base, for closing cor. of secs. 30 and 31, with brass cap marked



1941

From this closing cor., the cor. of secs. 25 and 36, on E. bdy. of T. 7 N., R. 2 E., bears N. 0° 22' W., 91 lks. dist.; an iron post, 2 ins. diam., set, marked and witnessed as described in the field notes of T. 7 N., R. 2 E., this group.

At mid point on W. bdy. of sec. 31.

Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground to solid rock, and in a mound of stone to top, with a sandstone, 8x6x5 ins., marked X, deposited at base, for 1/4 sec. cor., sec. 31 only, with brass cap marked

DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 3 E.

Chains

1/4 S31
1941

From this 1/4 sec. cor., the 1/4 sec. cor. on E. bdy. of sec 36, bears N. 0° 02' W., 45 lks. dist.; an iron post, set marked and witnessed as described in the field notes of T. 7 N., R. 2 E., this group.

Land, mountainous; rolling slopes.
Soil, gravelly and rocky mountain loam; 3rd rate.
Timber, scattered aspen and juniper.
Undergrowth, sagebrush, oak, choke cherry, service berry honeysuckle, and maple. Medium growth of grass and weed.
Good grazing land.

From the cor. of secs. 29, 30, 31, and 32.

N. 0° 28' E., between secs. 29 and 30.

Ascend over S. to SW. slope, through dense undergrowth and clumps of timber.

40.41 On SW. slope, 130 ft. above sec. cor.

The 1/4 sec. cor., which is a quartzite, 14x11x6 ins., marked with 1/4 on W. face, firmly set in the ground and in a mound of stone.

At point for cor.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with the original cor. stone deposited as base, for 1/4 sec. cor., with brass cap marked

330 | S29
1944

stone, 3 ft. base, 2 ft. high, W. of cor. raise a mound of

Thence

N. 0° 21' W., between secs. 29 and 30.

20.70 Top of ascent on SW. slope, 270 ft. above 1/4 sec. cor.; descend over NW. slope.

31.60 Draw, 50 ft. below top of ascent, course SW.; ascend over SE. slope.

40.02 On SE. slope, 60 ft. above draw.

The cor. of secs. 19, 20, 29, and 30, which is a quartzite, 20x14x10 ins., marked with 2 notches on S., and 5 notches on E. edge, firmly set in the ground and in mound of stone

At point for cor.

Set an iron post, 3 ft. long, 2 ins. diam., 18 ins. in the ground to solid rock, and in a mound of stone to top, for cor. of secs. 19, 20, 29, and 30; with brass cap marked

DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 3 E.

Chains

T7N	R3E
S19	S20
S30	S29

1944

deposit the original cor. stone at base of post.

Land, mountainous.
 Soil, gravelly and rocky mountain loam; 3rd rate.
 Timber, scattered clumps of aspen.
 Undergrowth, sagebrush, service berry, choke cherry, maple, and honeysuckle. Medium growth of grass and weeds.
 Good grazing land.

From the cor. of secs. 20, 21, 28, and 29.

N. 89° 16' W., between secs. 20 and 29.

Ascend over SE. slope, through dense undergrowth.

17.30 Top of ascent, 180 ft. above sec. cor., slopes S.; descend

28.70 Canyon, 220 ft. below top of ascent, course S. 20° E.; ascend over NE. slope.

40.04 Proportionate dist., on NE. slope, 190 ft. above canyon. No evidence of 1/4 sec. cor. found.

Set an iron post, 3 ft. long, 1 in. diam., 8 ins. in the ground to solid rock, and in a mound of stone to top, with a quartzite, 8x4x2 ins., marked X, deposited at base, for 1/4 sec. cor., with brass cap marked

1/4	S 20
	S 29

1944

72.00 Spur, 490 ft. above 1/4 sec. cor., slopes to the SE. and SW.; descend.

80.08 The cor. of secs. 19, 20, 29, and 30, 80 ft. below spur.

Land, mountainous.
 Soil, gravelly and rocky mountain loam; 3rd rate.
 No timber.
 Undergrowth, sagebrush, oak, service berry, choke cherry, and maple. Medium growth of grass and weeds. Good grazing land.

S. 89° 57' W., between secs. 19 and 30.

Ascend over SE. slope, through dense undergrowth, and scattered patches of timber.

5.00 Spur, 10 ft. above sec. cor., slopes SW.; descend .

25.70 Draw, 290 ft. below spur, course SW.; ascend.

29.40 Top of ascent, 25 ft. above draw, slopes SW.; descend.

DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 3 E.

Chains

33.50 Enter heavy timber, bears N. 20° W., and S. 20° E.

34.10 Old road, bears N. 15° W., and S. 15° E.

38.10 Pine Creek, a stream of clear water, 6 lks. wide, in canyon, 100 ft. below top of ascent, course S. 15° E.; ascend.

39.80 On NE. slope, 40 ft. above creek.

The $\frac{1}{4}$ sec. cor., which is a quartzite, 13x9x7 ins., marked with $\frac{1}{4}$ on N. face, firmly set in the ground and in a mound of stone.

At point for cor.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with the original cor. stone deposited at base, for $\frac{1}{4}$ sec. cor., with brass cap marked

S 19
S 30

1944 stone, 3 ft. base, 2 ft. high, N. of cor. raise a mound of
Thence

S. 89° 57' W., between secs. 19 and 30.

Ascend over NE. slope, leaving timber.

16.30 Spur, 330 ft. above $\frac{1}{4}$ sec. cor., slopes SE.; ascend across head of draw.

38.00 Head of draw, course SE.

50.00 Ridge, 800 ft. above $\frac{1}{4}$ sec. cor., bears NE. and SE.; descend.

51.93 The closing cor. of secs. 19 and 30, which is a quartzite, 12x8x6 ins., marked with 2 notches on S., 4 notches on N., edge, and CC on E. face, firmly set and witnessed by a mound of stone, 3 ft. base, 2 ft. high, to the E.

At point for cor.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, with the original cor. stone deposited at base, for closing cor. of secs. 19 and 30, with brass cap marked

T7N
T7N | R3E
R2E | S 19
S25 | S 30 CC

1941

From this closing cor., the cor. of secs. 24 and 25, as described in the field notes of T. 7 N., R. 2 E., this group, bears N. 0° 10' E., 1.62 chs. dist.

At mid point on W. bdy. of sec. 30.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., sec. 30 only, with brass cap marked

| $\frac{1}{4}$ S30

1941

raise a mound of

DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 3 E.

Chains

stone, 3 ft. base, 2 ft. high. E. of cor.

From this $\frac{1}{4}$ sec. cor., the $\frac{1}{4}$ sec. cor. on E. bdy. sec. 25, as described in the field notes of T. 7 N., R. 2 E., this group, bears N. 0° 10' E., 1.26 chs. dist.

Land, mountainous.

Soil, rocky dark mountain loam; 3rd rate.

Timber, aspen and cottonwood along creek.

Undergrowth, sagebrush, oak, choke cherry, service berry, and honeysuckle. Medium growth of grass and weeds.

Good grazing land.

From the cor. of secs. 19, 20, 29, and 30..

N. 0° 03' E., between secs. 19 and 20.

Ascend over SE. slope, through dense undergrowth.

14.00 Spur, 280 ft. above sec. cor., slopes SW.; ascend over gradual SW. slope.

23.50 Spur, 300 ft. above sec. cor., projects SE.; descend over NE. slope.

38.50 Base of descent, 70 ft. below ridge, slopes E.; ascend over SE. slope.

39.52 Proportionate dist.; no evidence of $\frac{1}{4}$ sec. cor. found.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked



raise a mound of

stone, 3 ft. base, 2 ft. high, W. of cor.

67.30 Enter heavy aspen timber and willows, bear E. and W.

68.65 Fence, stake and rider, 4 poles high, bears E. and W.


70.00 Top of ascent, 300 ft. above $\frac{1}{4}$ sec. cor., slopes E.; descend.

79.04 On NE. slope, 200 ft. below top of ascent.

The cor. of secs. 17, 18, 19, and 20, which is a quartzite, 18x12x9 ins., marked with 3 notches on S., and 5 notches on E. edge, firmly set in the ground and in small mound of stone.

At point for cor.

Set an iron post, 3 ft. long, 2 ins. dian., 27 ins. in the ground, with the original cor. stone deposited at base, and in mound of stone to top, for cor. of secs. 17, 18, 19, and 20, with brass cap marked.



DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 3 E.

Chains

2512410

Land, mountainous.

Soil, rocky dark mountain loam; 3rd rate.

Timber, scattered patches of aspen.

Undergrowth, sagebrush, service berry, choke cherry, mountain laurel, maple, and mahogany. Medium growth of grass and weeds. Good grazing land.

From the cor. of secs. 16, 17, 20, and 21.

N. $87^{\circ} 25'$ W., between secs. 17 and 20.

Ascend over E. slope, through dense undergrowth.

5.00 Spur, .80 ft. above sec. cor., projects S.; descend over W. slope.

12.20 Draw, 130 ft. below spur, course SW., from the N.; ascend.

19.00 Top of ascent, 50 ft. above draw, slopes S.; descend.

30.80 Head of Birch Creek, 20 ft. below top of ascent, course S.; ascend over E. slope.

40.00 Proportionate dist., on E. slope 210 ft. above Birch Creek. No evidence of $\frac{1}{4}$ sec. cor. found.Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground to solid rock, and in a mound of stone to top, with a sandstone, 6x4x2 ins., marked X, deposited at base, for $\frac{1}{4}$ sec. cor., with brass cap marked

$$\frac{1}{4} \frac{S 17}{S 20}$$

1944

41.00 Spur, 10 ft. above $\frac{1}{4}$ sec. cor., projects S.; descend.

44.20 Draw, 110 ft. below spur, course S.; ascend.

52.50 Top of ascent, 100 ft. above draw, slopes S.; descend.

64.70 Seepage of clear water, in canyon, 100 ft. below top of ascent, course SE.; dense aspen and scattered cottonwood along canyon; ascend.

80.00 The cor. of secs. 17, 18, 19, and 20, 270 ft. above canyon.

Land, mountainous.

Soil, rocky dark mountain loam; 3rd rate.

Timber, aspen and scattered cottonwood along canyon.

Undergrowth, sagebrush, maple, mountain laurel, service berry, choke cherry, and honeysuckle. Medium growth of grass and weeds. Good grazing land.

N. $89^{\circ} 10'$ W., between secs. 18 and 19.

Descend over NW. slope, through dense undergrowth.

1.00 Small draw, 20 ft. below sec. cor., course NE.; ascend over SE. slope.

17.30 Ridge, 250 ft. above sec. cor., bears NW. and SE.; descend.

DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 3 E.

Chains	
18.00	Enter dense sagebrush, bears NW. and SE.
19.75	Staker and rider fence, 4 poles high, bears NW. and SE.
26.00	Enter dense timber and tall undergrowth, bears NE. and SW.
34.00	Leave timber, bears NE. and SW.
40.00	Proportionate dist., in head of draw, 160 ft. below ridge, course SW. No evidence of $\frac{1}{4}$ sec. cor. found. Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked
	$\frac{1}{4} \begin{array}{l} S 18 \\ S 19 \\ 1944 \end{array}$
	raise a mound
	of stone, 3 ft. base, 2 ft. high, N. of cor.
	Ascend over SE. slope.
50.50	Spur, 50 ft. above $\frac{1}{4}$ sec. cor., slopes SW.; descend.
64.25	Old road, bears N. and S.
64.60	Pine Creek, dry, in canyon, 400 ft. below spur, course S.; ascend.
73.00	Spur, 170 ft. above creek, slopes S.; descend.
85.10	Draw, 60 ft. below spur, course SE.; ascend over NE. slope.
85.30	Stock trail, bears NW. and SE.
86.50	Enter clumps of fir timber.
91.40	Intersect E. bdy. of sec. 24, T. 7 N., R. 2 E. Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for closing cor. of secs. 18 and 19, with brass cap marked
	$\begin{array}{l} T7N \quad T7N \\ R2E \quad \left \begin{array}{l} S18 \\ S19 \end{array} \right. \quad CC \\ S24 \quad \left \begin{array}{l} S18 \\ S19 \\ R3E \end{array} \right. \end{array}$
	1941
	from which
	A balsam, 5 ins. diam., bears N. 22° E., 157 lks. dist., marked T7NR3ES18CCBT.
	A Douglas fir, 12 ins. diam., bears S. 11° E., 49 lks. dist., marked T7NR3ES19CCBT.
	From this closing cor., the cor. of secs. 13 and 24, bears N. 0° 23' E., 2.40 chs. dist.; as described in the field notes of T. 7 N., R. 2 E., this group.
91.97	The original closing cor. of secs. 18 and 19, which is a quartzite, 16x10x8 ins., marked with 3 notches on N. and S. edges and CC on E. face, firmly set and witnessed by a mound of stone, 3 ft. base, 2 ft. high, to the E. I mark this cor. monument W P on E. face for witness point. At midpoint on W. bdy. of sec. 19. Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor. of sec. 19 only, with brass cap marked
	$\frac{1}{4} \begin{array}{l} S19 \\ 1941 \end{array}$

DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 3 E.

Chains

from which

A Douglas fir, 14 ins. diam., bears N. 64° 45' E., 18 lks. dist., marked $\frac{1}{4}$ S19BT.

A Douglas fir, 14 ins. diam., bears S. 31° 15' E., 11 lks. dist., marked $\frac{1}{4}$ S19BT.

From this $\frac{1}{4}$ sec. cor., the $\frac{1}{4}$ sec. cor. on E. bdy. of sec. 24 bears N. 0° 23' E. 2.01 chs. dist., as described in the field notes of T. 7 N., R. 2 E., this group.

Land, mountainous.

Soil, rocky dark mountain loam; 3rd. rate.

Timber, aspen, juniper and Douglas fir on portions of mile. Undergrowth, sagebrush, chokecherry, service berry, maple, mountain laurel and honeysuckle. Medium growth of grass and weeds. Good grazing land.

From the cor. of secs. 17, 18, 19, and 20,

N. 0° 03' W., between secs. 17 and 18.

Descend over NW. slope, through dense undergrowth and scattered clumps of timber.

- 2.00 Draw, 20 ft. below sec. cor., course N. 60° E.; ascend.
- 4.90 Top of ascent, 30 ft. above draw, slopes E.; descend.
- 13.00 Enter dense sagebrush, bears E. and W.
- 13.40 Draw, 90 ft. below top of ascent, course E.; ascend.
- 16.00 Top of ascent, 20 ft. above draw, slopes E.; descend.
- 20.60 Canyon, 10 ft. below top of ascent, course SE.; thence along E. side of canyon.
- 29.60 Recross canyon, course S. 20° W.; ascend.
- 32.60 Enter scattered timber and tall undergrowth, bears NE. and SW.; leave sagebrush.
- 35.10 A small spring of good clear water, bears west about 2.50 chs. dist. The spring is enclosed by a woven wire fence with pole on top and 30 ft. square; and the water flows into a galvanized stock watering trough, about 100 ft. long, 2 ft. wide at top, 1 ft. wide at bottom and $1\frac{1}{2}$ ft. deep.
- 40.43 Proportionate dist., on SE. slope, 160 ft. above canyon. No evidence of $\frac{1}{4}$ sec. cor. found.

Set an iron post, 3 ft. long, 1 in. diam., 22 ins. in the ground to solid rock, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$
S18 | S17

1944

from which

An aspen, 5 ins. diam., bears N. 18° 45' E., 38 lks. dist., marked $\frac{1}{4}$ S17BT.

DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 3 E.

Chains

An aspen, .5 ins. diam., bears N. 52° 15' W., 41.1 kts. dist., marked $\frac{1}{4}$ S18BT.

62.50 Spur, 260 ft. above $\frac{1}{4}$ sec. cor., projects SW.; descend.

71.20 Draw, 45 ft. below spur, course SW.; ascend.

80.86 On SE. slope, 180 ft. above draw.

The cor. of secs. 7, 8, 17, and 18, which is a quartzite, 14x8x6 ins., marked with 4 notches on S., and 5 notches on E. edge, firmly set and witnessed by a mound of stone, 3 ft. base, 2 ft. high, to the W.

At point for cor.

Set an iron post, 3 ft. long, 2 ins. diam., 22 ins. in the ground to solid rock, and in a mound of stone to top, with the original cor. stone deposited at base, for cor. of secs. 7, 8, 17, and 18, with brass cap marked

T7N, R3E	
S 7	S 8
S18	S17

1944

Land, mountainous.

Soil, rocky dark mountain loam; 3rd rate.

Timber, scattered clumps of aspen.

Undergrowth, sagebrush, mountain laurel, choke cherry, service berry, maple, oak, and honeysuckle. Medium growth of grass and weeds. Good grazing land.

From the cor. of secs. 8, 9, 16, and 17.

N. 86° 59' W., between secs. 8 and 17.

Ascend over NE. slope, through dense undergrowth, and scattered patches of timber.

8.00 Spur, 170 ft. above sec. cor., projects SE.; descend.

21.50 Draw, 50 ft. below spur, course SE.; ascend.

32.00 Spur, 120 ft. above draw, projects SE., from N.; descend.

40.04 Proportionate dist.; no evidence of $\frac{1}{4}$ sec. cor. found.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$ S 8
S 17

1944

from which

An aspen, 4 ins. diam., bears S. 28° 30' W., 35 kts. dist., marked $\frac{1}{4}$ S17BT.

An aspen, 4 ins. diam., bears N. 57° 15' W., 20 kts. dist., marked $\frac{1}{4}$ S8BT.

45.30 Draw, 170 ft. below spur, course S. 15° E.; ascend.

58.00 Spur, 290 ft. above draw, slopes SE.; descend.

DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 3 E.

Chains	
66.00	Draw, 70 ft. below spur, course S.; ascend.
78.00	Spur, 250 ft. above draw, slopes S.; thence along S. slope
80.08	The cor. of secs. 7, 8, 17, and 18.
	<p>Land, mountainous. Soil, rocky dark mountain loam; 3rd rate. Timber, scattered aspen. Undergrowth, sagebrush, choke cherry, mountain laurel, maple, and honeysuckle. Medium growth of grass and weeds Good grazing land.</p>
	S. 89° 52' W., between secs. 7 and 18.
	Ascend over SE. slope, through dense undergrowth and scattered clumps of timber.
3.50	Spur, 15 ft. above sec. cor., slopes S. 30° W.; descend.
18.60	Draw, 260 ft. below spur, course S. 30° W.; ascend.
27.00	Old road and stock trail, bears N. and S.
30.50	Spur, 30 ft. above draw, slopes S.; descend over rolling W. slope.
39.80	<p>Proportionate dist.; no evidence of $\frac{1}{4}$ sec. cor. found. Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., with brass cap marked</p>
	$\frac{1}{4} \begin{array}{l} S 7 \\ S 18 \end{array}$
	1944
	from which
	An aspen, 6 ins. diam., bears S. 41° 15' W., 206 lks. dist., marked $\frac{1}{4}$ S18BT.
	An aspen, 5 ins. diam., bears N. 82° 45' W., 224 lks. dist., marked $\frac{1}{4}$ S7BT.
39.95	Fence, stake and rider, 4 poles high, bears N. and S.
41.40	Stock trail, bears N. and S.
41.60	Draw, 120 ft. below spur, course S.; ascend over E. slope.
55.50	E. side of ridge, 160 ft. above draw, bears N. and S.; thence over rolling top.
65.00	W. side of spur, ridge, bears N. and S.; descend.
83.20	Draw, 150 ft. below ridge, course N., from SE.; ascend.
85.40	Spur, 60 ft. above draw, slopes N.; descend.
88.20	Draw, 70 ft. below spur, course N., from SW.; ascend.
90.73	Intersect E. bdy. of sec. 13, T. 7 N., R. 2 E.
	Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for closing cor. of secs. 7 and 18, with brass cap marked

DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 3 E.

Chains

T7N	T7N	
R2E	R3E	
S13	S 7	CC
	S 18	

1941

from which

An aspen, 6 ins. diam., bears N. $25^{\circ} 45'$ E., 60 lks. dist., marked T7NR3ES7CCBT.

An aspen, 6 ins. diam., bears S. 5° E., 64 lks. dist., marked T7NR3ES18CCBT.

From this closing cor., the cor. of secs. 12 and 13, bears N. $0^{\circ} 23'$ E., 4.17 chs. dist.; as described in the field notes of T. 7 N., R. 2 E., this group.

91.34 The original closing cor. of secs. 7 and 18, a sandstone, $14 \times 8 \times 5$ ins., marked with 4 notches on S., 2 notches on N., and CC on E. face, firmly set and witnessed by a mound of stone, 3 ft. base, 2 ft. high, to the E. I mark WP on E. face of the cor. monument for witness point.

At mid point on W. bdy. of sec. 18.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., sec. 18 only, with brass cap marked

$\frac{1}{4}$ S18

1941

raise a mound of

stone, 3 ft. base, 2 ft. high, E. of cor.

From this $\frac{1}{4}$ sec. cor., the $\frac{1}{4}$ sec. cor. on E. bdy. of sec. 13, bears N. $0^{\circ} 23'$ E., 3.29 chs. dist., as described in the field notes of T. 7 N., R. 2 E., this group.

Land, mountainous.

Soil, rocky and gravelly mountain loam; 3rd rate.

Timber, scattered aspen.

Undergrowth, sagebrush, oak, choke cherry, service berry, maple, mountain laurel, and honeysuckle. Medium growth of grass and weeds. Good grazing land.

From the cor. of secs. 7, 8, 17, and 18.

N. $0^{\circ} 04'$ W., between secs. 7 and 8.

Ascend over SE. slope, through dense undergrowth.

4.50 Enter dense timber, bears NW. and SE.

5.50 Spur, 35 ft. above sec. cor., slopes S. 30° W., descend over rolling NW. slope.

22.00 Leave timber, bears NE. and SW.

21.90 Draw, 30 ft. below spur, course SW.; ascend over SE. slope.

38.50 Enter timber, bears NW. and SE.

38.41 On SE. slope, 100 ft. above draw.

The $\frac{1}{4}$ sec. cor., which is a quartzite, $15 \times 11 \times 6$ ins., marked with $\frac{1}{4}$ on W. face, firmly set and witnessed by a mound of stone, 3 ft. base, 2 ft. high, to the W.

DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 3 E.

Chains

- Land, mountainous.
Soil, rocky and gravelly mountain loam; 3rd rate.
Timber, dense aspen on portions of mile,
Undergrowth, sagebrush, choke cherry, service berry,
maple, mountain laurel, and honeysuckle. Medium growth
of grass and weeds. Good grazing land.
-
- From the cor. of secs. 4, 5, 8, and 9.
N. 87° 55' W., between secs. 5 and 8.
Ascend along N. slope on S. side of draw, through medium
dense timber and dense undergrowth.
- 3.80 Stock trail, bears N. and S.; a small spring of good clear
water, bears north 5.23 chs. dist.
- 35.00 Ascend over rolling E. slope.
- 40.07 Proportionate dist., on rolling E. slope, 500 ft. above
sec. cor., No evidence of $\frac{1}{4}$ sec. cor. found.
- Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the
ground, for $\frac{1}{4}$ sec. cor., with brass cap marked
- $$\frac{S 5}{S 8}$$
- 1944 from which
- An aspen, 5 ins. diam., bears N. 79° 45' E., 24 lks.
dist., marked $\frac{1}{4}$ S5BT.
- An aspen, 4 ins. diam., bears S. 29° 15' E., 33 lks.
dist., marked $\frac{1}{4}$ S8BT.
- 49.80 Old road, bears N. 20° W., and S. 20° E.
- 54.00 Top of mountain, 35 ft. above $\frac{1}{4}$ sec. cor., bears N. and S.;
thence over rolling top.
- 59.00 Enter scattered timber, bears N. and S.
- 69.00 Descend over NW. slope, leaving mountain top, bears
N. 30° E. and S. 30° W.
- 74.75 Old road, bears NE. and SW.
- 80.14 The cor. of secs. 5, 6, 7, and 8, 70 ft. below ridge.
- Land, mountainous; rolling slopes.
Soil, rocky mountain loam; 3rd rate.
Timber, aspen on portion of mile.
Undergrowth, sagebrush, choke cherry, service berry,
maple, and honeysuckle. Medium growth of grass and weeds.
Good grazing land.
-
- S. 89° 38' W., between secs. 6 and 7.
Descend over NW. slope, through dense undergrowth and
scattered timber.
- 6.90 Draw, 75 ft. below sec. cor., course N.; ascend.
- 11.00 Top of ascent, 10 ft. above draw, slopes N.; descend

DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 3 E.

Chains

anted

19.80 Draw, 100 ft. below top of ascent, course SW.; ascend.

39.78 Proportionate dist., on SE. slope, 230 ft. above draw. No evidence of $\frac{1}{4}$ sec. cor. found.

Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground to solid rock, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$ S 6
S 7

1944

from which

An aspen, 5 ins. diam., bears N. 42° 30' E., 190 lks. dist., marked $\frac{1}{4}$ S6BT.

An aspen, 5 ins. diam., bears S. 18° 30' E., 26 lks. dist., marked $\frac{1}{4}$ S7BT.

40.07 Stake and rider fence, 4 poles high, bears N. and S.

51.50 Spur, 40 ft. above $\frac{1}{4}$ sec. cor., projects SW.; descend over NW. slope.

58.60 Descend along N. side of draw, draining W.

90.07 Intersect E. bdy. of sec. 12, T. 7 N., R. 2 E., 740 ft. below spur.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for closing cor. of secs. 6 and 7, with brass cap marked

T7N | T7N
R2E | R3E
S12 | S 6
S 7 CC

1941

from which.

An aspen, 6 ins. diam., bears N. 59° E., 85 lks. dist., marked T7NR3ES6CCBT.

An aspen, 8 ins. diam., bears S. 40° E., 32 lks. dist., marked T7NR3ES7CCBT.

From this closing cor., the cor. of secs. 1 and 12, bears N. 0° 23' E., 7.18 chs. dist.; as described in the field notes of T. 7 N., R. 2 E., this group.

91.07 The original closing cor. of secs. 6 and 7, which is a quartzite, 14x10x6 ins., marked with 1 notch on N., 5 notches on S., and CC on E. face, firmly set and witnessed by a mound of stone, 3 ft. base, 2 ft. high, to the E. I mark this stone cor. monument WP on E. face, for witness point.

At mid point on W. bdy. of sec. 7.

Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground to solid rock, and in a mound of stone to top, for $\frac{1}{4}$ sec. cor., sec. 7 only, with brass cap marked

$\frac{1}{4}$ S 7

1941

raise a mound of

DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 3 E.

Chains

stone, 3 ft. base, 3 ft. high, E. of cor.

From this $\frac{1}{4}$ sec. cor., the $\frac{1}{4}$ sec. cor. on E. bdy. 12, bears N. $0^{\circ} 23'$ E., 5.69 chs. dist.; as described in the field notes of T. 7 N., R. 2 E.

At proportionate dist., on W. bdy. of sec. 6.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ sec. cor., sec. 6 only, with brass cap marked

$\frac{1}{4}$ S 6

1941

from which

An aspen, 6 ins. diam., bears N. $2^{\circ} 30'$ E., 240 lks. dist., marked $\frac{1}{4}$ S6BT.

An aspen, 8 ins. diam., bears S. 48° E., 83 lks. dist., marked $\frac{1}{4}$ S6BT.

From this $\frac{1}{4}$ sec. cor., the $\frac{1}{4}$ sec. cor. on E. bdy. of sec. 1, bears N. $0^{\circ} 16'$ W., 6.13 chs. dist., as described in field notes of T. 7 N., R. 2 E.

Land, mountainous.

Soil, rocky mountain loam; 3rd rate.

Timber, scattered patches of aspen.

Undergrowth, sagebrush, choke cherry, service berry, maple, and honeysuckle. Medium growth of grass and weeds. Good grazing land.

From the cor. of secs. 5, 6, 31, and 32, on N. bdy. of Tp.

S. $0^{\circ} 06'$ E., between secs. 5 and 6.

Ascend over rolling NE. slope, through dense undergrowth and scattered patches of timber.

- 12.00 Spur, 50 ft. above sec. cor., projects N. 20° W.; descend over rolling SW. slope.
- 15.10 Small draw, 10 ft. below spur, course NW.; ascend.
- 20.00 Spur, 30 ft. above draw, projects W.; descend.
- 22.60 Head of draw, 10 ft. below spur, course W.; ascend
- 24.00 Enter dense timber, bears E. and W.
- 30.60 Spur, 70 ft. above draw, projects SW.; descend over SE. slope.
- 41.60 On SE. slope, 20 ft. below spur.

The $\frac{1}{4}$ sec. cor., which is a brown quartzite, 18x8x6 ins., marked with $\frac{1}{4}$ on W. face, firmly set and witnessed by a mound of stone, 3 ft. base, 2 ft. high, to the W.

At point for cor.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with the original cor. stone deposited at base, for $\frac{1}{4}$ sec. cor., with brass cap marked

DEPENDENT RESURVEY OF SUBDIVISION OF T. 7 N., R. 3 E.

Chains

S 6 | S 5

1944

from which

An aspen, 4 ins. diam., bears N. 41° 15' E., 10 lks. dist., marked $\frac{1}{4}$ S5BT.

An aspen, 4 ins. diam., bears S. 79° W., 32 lks. dist., marked $\frac{1}{4}$ S6BT.

Thence

S. 0° 02' E., between secs. 5 and 6.

- 14.50 Enter scattered timber, bears E. and W.
 29.40 Draw, 160 ft. below $\frac{1}{4}$ sec. cor., course SW., from E.; ascend over NW. slope.
 36.49 The cor. of secs. 5, 6, 7, and 8, 60 ft. above draw.

Land, mountainous; rolling slopes.

Soil, rocky and gravelly mountain loam; 3rd rate.

Timber, aspen.

Undergrowth, sagebrush, choke cherry, service berry, and honeysuckle. Medium growth of grass and weeds. Good grazing land.

GENERAL DESCRIPTION, T. 7 N., R. 3 E.

T. 7 N., R. 3 E., is mountainous in character, varying in elevation above sea level from about 6000 ft. in the south west portion to about 8000 ft. in the east and north portions. Through the southwest portion the slopes of the ridges and spurs are rolling, becoming more abrupt in the northern portion. In the south east corner the slopes are very steep and broken by ledges. The drainage of the township is formed by the South Fork of the Ogden River and tributaries. The South Fork of the Ogden River enters the township in section 36, flowing westerly and leaves the township in section 32. Wheat Grass and Bear Wallow canyons form the main drainage of the eastern portion, and is in a southwesterly direction. Beaver Creek and tributaries form the drainage of the central portions, entering the township in section 3, and drain south and southwest to junction with the South Fork of the Ogden River in section 33. Pine Creek, heading in sections 7 and 8, forms the drainage of the west portion, and drains south and southeasterly to junction with Beaver Creek in section 33.

The township is well watered by streams of clear water found in most of the canyons. In the South Fork of the Ogden River, a stream of water about 40 links wide is found, and in Dry Bread Hollow there is a stream of water about 30 links wide, from a large spring in the SW $\frac{1}{4}$ NE $\frac{1}{4}$ section 23, flowing south through sections 23 and 26, and to junction with the South Fork of the Ogden River in section 34.

The soil throughout the west and northeast corner of the township is mostly gravelly and rocky, and may be classed as 3rd rate. The soil in the southeast corner is very rocky, with numerous quartzite and limestone outcroppings, and may be classed as 4th rate. The soil throughout the

GENERAL DESCRIPTION, T. 7 N., R. 3 E.

Chains

township supports from a medium to dense growth of sagebrush, and from scattered to dense growth of oak brush, and scattered service berry. Through the north portion is found a medium growth of choke cherry, honeysuckle, and maple.

From scattered patches to dense aspen timber is found through the northern portion, and some Douglas fir timber is found on the north slopes through the southeast portion of the township.

The predominating interest in the township is stock grazing, as there is a good growth of native grass, weeds, and brush, affording excellent feed. A narrow strip of land along the South Fork of the Ogden River in sections 32, 33, and 34 is under cultivation. Along Beaver Creek and the South Fork of the Ogden River are a number of camp sites which are visited by numerous campers during the summer months. There is an oiled highway through sections 3, 10, 15, 16, 21, 28, 32 and 33, and a graded road extending through sections 33, 34, and to camp Kisel, a boy scout camp, located in the south portion of the NW $\frac{1}{4}$ of section 26.

No indications of valuable minerals, oil, oil shale, or coal were found in the township.

The mean magnetic declination was found to be 18° E.

Pages to show each of which a more extensive description
is given in the report of the investigation of the

Blank

Page

CERTIFICATE OF UNITED STATES SURVEYOR

I, Wilson McConkie, HEREBY CERTIFY upon honor
pursuance of special instructions bearing date of the 19th day of October, 1939
received from the district cadastral engineer for Utah, with assign
instructions dated May 8, 1941, I have ~~surveyed~~ established the closing
corners and $\frac{1}{4}$ sec. corner between the closing corners along the west
boundary of T. 7 N., R. 3 E.,

of the Salt Lake Meridian, in the State of Utah, which
represented in the foregoing field notes as having been executed by me and under my direction; and that
survey has been made in strict conformity with said instructions, the Manual of Instructions for the Survey
of the Public Lands of the United States, and in the specific manner described in the foregoing field notes
Salt Lake City, Utah
May 7, 1942

Wilson McConkie
Assistant Cadastral Engineer

CERTIFICATE OF APPROVAL

OFFICE OF U.S. SUPERVISOR OF SURVEYS,
Denver, Colo., 19

The foregoing field notes of the survey of

executed by
under special instructions dated
instructions dated
having been critically examined, and
the necessary corrections made prior to their certification by the engineer, the said field notes, and the survey
therein described, are hereby approved.

U.S. Supervisor of Surveys.

CERTIFICATE OF TRANSCRIPT

I CERTIFY that the foregoing transcript of the field notes of the above-described surveys in
is a true copy of the original field notes on file in the public survey office.

U.S. Supervisor of Surveys.

UNITED STATES
DEPARTMENT OF THE INTERIOR
GENERAL LAND OFFICE

FIELD ASSISTANTS

NAMES	CAPACITY
John P. Balen	Principal Assistant
L. Roland Schneider	Chainman
Kenneth W. Torp	Chainman
Edm. Chenchar	Chainman
Edm. Casto	Chainman
William J. Igo	Chainman
Stephen P. Smoot	Chainman
Mirand Day	Flagman
Kenneth W. Parkinson	Flagman
Robert J. Apgood	Flagman
Thomas C. King	Cornerman
W. A. Ramsay	Cornerman
Douglas G. Reynolds	Cornerman
Daniel Whittier	Cornerman
W. M. Golden	Axeman
Edm. A. Gorder	Axeman
Douglas Jacobson	Axeman
William A. McCune	Axeman

CERTIFICATE OF SURVEYOR

We, ~~R~~Ralph Gentry, Robert C. Yundt, and J. C. Clark, HEREBY CERTIFY upon honor the
pursuance of special instructions bearing date of the 19th day of October, 1939,
received from the district cadastral engineer for Utah, with supplemental ~~work~~ assign-
instructions dated June 17, 1944, we ~~have~~ ~~surveyed~~ ~~independently~~ resurveyed the
north boundary of T. 6 N., R. 3 E., the west boundary of T. 7 N., R.
4 E., the south boundary of T. 8 N., R. 3 E., and the subdivisional
lines of T. 7 N., R. 3 E.

of the Salt Lake Meridian, in the State of Utah; which
represented in the foregoing field notes as having been executed by ~~us~~ ^{us} and under ~~my~~ ^{our} direction; and that
survey has been made in strict conformity with said instructions, the Manual of Instructions for the Sur-
of the Public Lands of the United States, and in the specific manner described in the foregoing field notes

Salt Lake City, Utah
October 17, 1944.

Ralph Gentry
Cadastral Engineer
Robert C. Yundt
Associate Cadastral Engineer
J. C. Clark
Assistant Cadastral Engineer

CERTIFICATE OF APPROVAL

Chief Cadastral Engineer,
OFFICE OF ~~SURVEYS~~ ~~AND~~ ~~ENGINEERING~~

Denver, Colo., April 24, 1944

The foregoing field notes of the ~~survey~~ ~~of~~ ~~the~~ ~~north~~ ~~boundary~~
of T. 6 N., R. 3 E., the west boundary of T. 7 N., R. 4 E., the south
boundary of T. 8 N., R. 3 E., and of the subdivisional lines of T. 7
R. 3 E., and the establishment of the closing corners and 1/4 sec. corners between
Wilson McConkie, corners along the west boundary of T. 7 N., R. 3 E.
executed by ~~Ralph Gentry~~, Cadastral Engineer, Robert C. Yundt, Associate
Cadastral Engineer, and J. C. Clark, Assistant Cadastral Engineer
under special instructions dated October 19, 1939, and supplemental ~~work~~ assign-
instructions dated June 17, 1944,

having been critically examined, and
the necessary corrections made prior to their certification by the engineer, the said field notes, and the survey
therein described, are hereby approved.

[Signature]
Acting Chief Cadastral Engineer.

CERTIFICATE OF TRANSCRIPT

I CERTIFY that the foregoing transcript of the field notes of the above-described surveys in
is a true copy of the original field notes on file in the public survey office.

Supervisor of Surveys.

UNITED STATES
DEPARTMENT OF THE INTERIOR
GENERAL LAND OFFICE

Book "A"

FIELD NOTES



OF THE

DEPARTMENT RESERVE OF

THE WEST AND NORTH QUARTERS

AND OF

THE SURVEYED LINES OF

T. 2 N., R. 4 E.

Of the 111.400 Meridian,

the State of Utah

EXECUTED BY

Edna Centry, Cadastral Engineer, and

Alvin C. Allorge, Public Land Surveyor

Under special instructions dated October 11, 1939, which provided

for the surveys included under Group No. 304, bearing the approval of the

Commissioner of the General Land Office under date of November 24, 1939

and assignment instructions dated June 1, 1940

Survey commenced June 6, 1940

Survey completed August 3, 1940

INDEX DIAGRAM.

Township 9 North, Range 4 East.

	14	13	12	11	10	9
7	6 66	5 65	4 53	3 43	2 32	1 23
6	7 64	8 63	9 51	10 41	11 30	12 21
6	18 61	17 60	16 49	15 39	14 29	13 19
5	19 59	20 58	21 47	22 37	23 27	24 17
3	20 56	29 55	28 45	27 35	26 25	25 16
2	21 54	22 53	23 44	24 34	25 24	26 15

190 11

INDEX DIAGRAM

Township 9 North, Range 4 East
200 199 198 197 196 195

193 • 252	253 • 251	240 • 239	230 • 229	219 • 218	210 1 209
192 7 250	251 • 249	238 • 237	228 10 227	217 11 216	208 12 207
192 16 247	248 17 246	236 18 235	226 15 225	215 14 215	206 13 205
191 19 245	245 20 244	234 21 233	224 22 223	214 23 213	204 24 203
189 20 242	243 25 241	232 26 231	222 27 221	212 28 211	202 29 202
188 31 240	240 32 240	230 33 230	220 34 220	210 35 210	201 36 201

DEPENDENT RESURVEY OF
T. 9 N., R. 4 E., SALT LAKE MERIDIAN

The official survey of T. 9 N., R. 4 E., Salt Lake Meridian, is shown upon the township plat approved February 24, 1879. These field notes are those of a dependent resurvey, or reestablishment of the west and north boundaries and the subdivision lines of the township.

The resurvey is a complete restoration of the original boundaries and subdivision lines in the true original positions as adjusted to the identified evidence.

Before reconstructing or restoring the corners, the lines of the original survey were retraced, and search was made for evidence of the original corner monuments, and other calls of the field notes. When duly identified or restored, the positions were remonumented.

The rules of proportionate measurement were applied in order to ascertain the position of each lost corner, after completing the necessary retracements.

The retracement data were submitted for office examination and verification. In order to simplify the record, the true line notes only are supplied here, which refer to the completed resurvey.

Survey commenced June 6, 1940, and executed with Buff and Buff solar transit No. 8028, used by Ralph Gentry, Cadastral Engineer, and Buff and Buff solar tranist No. 9978, used by Alvyn C. Alberga, Public Land Surveyor. The instruments are property of the General Land Office, and are equipped with the Smith solar attachments and full vertical circles; the horizontal limbs are provided with two double verniers placed opposite to each other, and read to single minutes of arc, which is also the least count of the verniers of the vertical circles, and of the latitude and declination arcs. The instruments were approved for use on this survey by the District Cadastral Engineer for Utah, conditional upon satisfactory field tests. The instruments were in good condition at the commencement of this survey, and were tested and found free from any appreciable error.

The direction of the lines were determined by the solar transit method. The measurements were made with Lallie steel tapes, 5 chains in length, graduated every link for the first 100 links, and thereafter at intervals of ten links. The tapes were tested by comparison with a Lufkin standard steel tape one chain long and found correct. The measurements were made on the slope, and the vertical angle of each interval was ascertained by clinometers in good adjustment; the horizontal equivalents are entered in the field note record.

The data furnished give the approximate geographic position of the SE corner of the township, as follows: latitude $41^{\circ}28'N.$, and longitude $111^{\circ}26'W.$

June 6, 1940, at camp, located in the NE $\frac{1}{4}$ section 28, T. 9 N., R. 4 E., approximate latitude $41^{\circ}30'N.$, longitude $111^{\circ}29'W.$, at 5h 54m 30s a.m., by my watch, which carries correct 105th meridian time as determined by radio signals, or 5h 28.6m a.m., l.m.t. I make an hour angle observation on Polaris, east of the meridian, two each with the telescope in direct and reverse positions, reading the horizontal deflection angle from Polaris, east to well defined reference point about 1 mile distant.

Mean horizontal deflection angle	
from Polaris, east to reference point,	33° 41'
Azimuth of Polaris	1° 02' E.
True bearing of reference point,	N. 34° 43' E

In order to verify the latitude of this station, I make a meridian observation of the sun, observing the altitude of the sun's lower limb with the telescope in direct position, reversing the transit and observing the sun's upper limb:

DEPENDENT RESURVEY OF
T. 9 N., R. 4 E., SALT LAKE MERIDIAN.

Chains

Apparent time of observation, 12h. 00m. 00s
 Mean observed altitude of the sun, 71° 12'
 Reduced latitude, 40° 30'

Every hour from 7:30 to 10:30 a.m., and from 1:30 to 4:30 p.m., we make proper settings on the arcs of the solar attachments of each instrument and ascertain that the resulting orientation of the instruments, when compared with the meridian established by Polaris observation has a maximum error of less than 1' 30".

Conditions permitting, the arcs were tested daily by noon observations, and the meridional indications of the solar attachments verified at frequent intervals throughout this survey.

DEPENDENT RESURVEY OF WEST BOUNDARY, T. 9 N., R. 4 E.

Reestablishment of Surveys executed by J. H.
 Martineau, Deputy Surveyor, in 1877.

From the standard corner of Ts. 9 N., Rs 3 and 4 E., which is a limestone, 20x14x8 ins., marked 6 notches on N. E. and W. edges, and SC on N. face, and firmly set, from which

A Douglas fir, 24 ins. diam., bears S.5°30'W.,
 23 links dist., marked T8NR3ES1BT

A Douglas fir, 12 ins. diam., bears N.40°45'W.,
 90 links dist., marked T9NR3ES36BT

At point for corner.

Set an iron post, 3 ft. long, 3 ins. diam., 27 ins. in the ground, with original corner monument deposited at base, for the standard corner of T. 9 N., Rs. 3 and 4 E., with brass cap marked

SC	
T9N	
R3E	R4E
S36	S31

1940

new bearing tree,

from which

A Douglas fir, 12 ins diam., bears N.31°15'E.,
 75 links dist., marked T9NR4ES31SCBT

Thence

N.0°16'E., between sections 31 and 36.

Descend NW. slope, over mountainous land, through timber and medium dense chokecherry, mountain laurel, and sagebrush undergrowth.

- 0.70 Draw, 270 ft. below Tp. corner, course NW.; ascend SW. slope
- 34.00 Leave timber, bears E. and W.
- 23.00 Spur, 110 ft. above draw, projects NW.; descend NE. slope.
- 38.60 Draw, 210 ft. below spur, course N.75°W.; ascend SW. slope.
- 39.33 On SW. slope, 20 ft. above draw.

DEPENDENT RESURVEY OF WEST BOUNDARY, T. 9 N., R. 4 E.

Chains

The $\frac{1}{4}$ section corner, which is a limestone, 18x12x8, ins., firmly set and marked $\frac{1}{4}$ on W. face, and witnessed by small mound of stone to the west.

At point for corner.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with original corner monument deposited at base, for $\frac{1}{4}$ section corner, with brass cap marked

$\frac{1}{4}$
S36 | S31
1940

of stone, 3 ft. base, 3 ft. high, W. of corner. raise a mound

Thence

N.1°14'E., with continuous measurement.

45.00 Enter timber, bears E. and W.

57.00 Spur, 230 ft. above $\frac{1}{4}$ section corner, projects NW.; descend NW. slope.

73.80 Draw, 130 ft. below spur, course N.75°W.; ascend S. slope, leaving timber, and enter dense mahogany, bears E. and W.

78.72 The corner of sections 25, 30, 31, and 36, which is a limestone, 15x10x6, ins., firmly set, and marked 5 notches on N., and 1 notch on S. edge, from which

A mahogany, 8 ins. diam., bears S.80°E., 15 links distant, marked T9NR4ES31BT

At point for corner.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, with original corner monument deposited at base, for corner of sections 25, 30, 31 and 36, with brass cap marked

T9N
R3E | R4E
S25 | S30
S36 | S31
1940

from which

new bearing trees.

A balsam, 6 ins. diam., bears N.55°E., 67 links dist., marked T9NR4ES30BT

A balsam, 5 ins. diam., bears S.53°W., 69 links dist., marked T9NR3ES36BT

A mahogany, 10 ins. diam., bears N.39°15'W., 31 links dist., marked T9NR3ES25BT

Land, mountainous; NW. drainage and exposure.

Soil, sandy mountain loam; rocky, 3rd rate.

Timber, aspen, Douglas fir, pinon, and aspen.

Undergrowth, medium dense chokecherry, mountain laurel and sagebrush; medium growth of weeds and grass

Good grazing land.

N.0°30'W., between sections 25 and 30.

Ascend S. slope, over mountainous land, through scattered timber, and medium dense undergrowth.

Chains

- 2.40 Spur, 40 ft. above section corner, slopes $\frac{1}{2}$ descend NW. slope.
- 5.80 Draw, 70 ft. below spur, course W.; ascend gradually along W. slope.
- 16.00 Spur, 90 ft. above draw, projects N.5°W.; descend NE. slope.
- 40.22 Proportionate distance; on NE. slope, 160 ft. below spur

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked

$\frac{1}{4}$
S25 | S30
1940

from which

- A balsam, 8 ins. diam., bears S.60°15'E., 41 links dist., marked $\frac{1}{4}$ S30 BT
- A spruce, 14 ins. diam., bears N.65°45'W., 40 links dist., marked $\frac{1}{4}$ S25 BT

- 57.80 Draw, 200 ft. below $\frac{1}{4}$ section corner, course NE.; ascend SE. slope.
- 64.00 Spur, 50 ft. above draw, slopes E.; descend NE. slope.
- 67.00 Head of draw, 40 ft. below spur, course N.60°E.; ascend SE. slope.
- 78.00 Spur, 120 ft. above draw, slopes E.; descend along E. slope.
- 80.45 Proportionate distance.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for corner of sections 19, 24, 25, and 30, with brass cap marked

T9N
R3E R4E
S24 | S19
S25 | S30
1940

from which

- An aspen, 6 ins. diam., bears N.68°15'E., 89 links dist., marked T9NR4ES19BT
- An aspen, 6 ins. diam., bears S.21°30'E., 31 links dist., marked T9NR4ES30BT
- An aspen, 5 ins. diam., bears S.77°15'W., 68 links dist., marked T9NR3ES25BT
- An aspen, 5 ins. diam., bears N.27°W., 52 links dist., marked T9NR3ES24BT

Land, mountainous.
Soil, dark, sandy mountain loam; rocky; 3rd rate.
Timber, aspen, balsam, juniper, and pinon pine.
Undergrowth, chokecherry, mahogany, mountain laurel;
medium growth of weeds and grass.
Good grazing land.

DEPARTMENTAL RESURVEY OF WEST BOUNDARY, T. 9 N., R. 4 E.

Chains

N. 0° 30' W., between sections 19 and 24.

Descend gradually along steep E. slope, over mountainous land, through medium dense timber and undergrowth.

10.00 Descend abrupt NE. slope broken by ledges.

30.00 Sheep Creek, stream of clear water, 10 links wide, in bottom of canyon, 1000 ft. below section corner, course N. 60° W.; ascend abrupt S. slope, leaving timber.

40.22 Proportionate distance; on steep S. slope, 600 ft. above canyon.

Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground to solid rock, and in mound of stone to top, for 1/4 section corner, with brass cap marked



from which

A juniper, 16 ins. diam., bears N. 77° W., 15 links dist., marked 1/2 S24BT


43.00 Spur, 100 ft. above 1/4 section corner, slopes S. 60° W.; descend.

49.50 Draw, 180 ft. below spur, course S. 60° W.; ascend SE. slope.

74.00 Spur, 700 ft. above draw, projects S. 30° W.; descend along W. slope, entering dense mahogany.

80.45 Proportionate distance; on W. slope, 40 ft. below spur.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground for corner of sections 13, 18, 19, and 24, with brass cap marked



from which

A Douglas fir, 12 ins. diam., bears N. 81° 30' E., 67 links distant, marked T9NR4ES18BT

A Douglas fir, 10 ins. diam., bears S. 84° E., 82 links distant, marked T9NR4ES19BT

A limber pine, 9 ins. diam., bears S. 48° W., 161 links distant, marked T9NR3ES24BT

A mahogany, 10 ins. diam., bears N. 24° W., 108 links distant, marked T9NR3ES13BT

Land, mountainous; steep, rocky slopes. Soil, light sandy mountain loam, rocky; 3rd rate. Timber, aspen and scattered Douglas fir, balsam, and juniper. Undergrowth, chokecherry, mountain laurel, sagebrush, and mahogany. Medium growth of weeds and grass. Good grazing land.

DEPENDENT RESURVEY OF WEST BOUNDARY, T. 2 N., R. 4 E.

Chains

N. 9° 30' W., between sections 13 and 18.

Descend along steep W. slope, over mountainous land through dense mahogany, and scattered chokecherry, service berry, nine bark, and sagebrush, and scattered timber.

- 10.00 Draw, 160 ft. below section corner, course S. 70° W.; ascend; leaving mahogany.
- 15.00 Enter dense aspen timber, bears NE. and SW.
- 24.00 Spur, 80 ft. above draw, slopes W.; descend.
- 30.00 Draw, 50 ft. below spur, course S. 50° W.; ascend steep S. slope.
- 32.00 Leave timber, bears NE. and SW.
- 40.22 Proportionate distance; on S. slope, 120 ft. above draw.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked

$\frac{1}{4}$
S13 | S18
1940

of stone, $3\frac{1}{2}$ ft. base, 3 ft. high, W. of corner. raise a mound

- 54.00 Spur, 340 ft. above $\frac{1}{4}$ section corner, projects SW.; descend along steep W. slope.

- 80.45 The corner of sections 7, 12, 13, 18, which is a limestone, 14x12x6 ins., firmly set, and marked 2 notches on N., and 4 on S. edges.

At point for corner.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, with original corner monument deposited at base, for corner of sections 7, 12, 13, and 18, with brass cap marked

T9N
R3E R4E
S12 | S7
S13 | S18
1940

of stone, $3\frac{1}{2}$ ft. base, 3 ft. high, W. of corner. raise a mound

Corner stands on W. slope, 350 ft. below spur.

Land, mountainous; steep slopes.
Soil, rocky mountain loam; 3rd rate.
Timber, aspen, and scattered Douglas fir and juniper on portion of mile.
Undergrowth, mahogany, chokecherry, service berry, nine bark, and mountain laurel. Medium growth of weeds and grass.
Good grazing land.

N. 0° 34' W., between sections 7 and 12.

Descend along W. slope, over mountainous land, through medium dense chokecherry, nine bark, sagebrush, and mountain laurel.

DEPENDENT RESURVEY OF WEST BOUNDARY, T. 9 N., R. 4 E.

Chains

- 12.00 Descend NW. slope, entering dense aspen timber, bears N.20°W., and S.20°E.
- 13.30 Head of draw, 230 ft. below section corner, course N.50°E.; ascend along E. slope; leaving timber.
- 17.00 Small spring of clear water, bears E. 3.25 chains distant.
- 32.00 Top of ascent, 30 ft. above draw, slopes E.; descend NE. slope.
- 39.71 Proportionate distance; on NE. slope, 80 ft. below top of ascent.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked

$\frac{1}{4}$
S12 | S7
1940

raise a mound

of stone, 3 ft. base, 3 ft. high, W. of corner.

- 47.00 Enter dense timber, bears E. and W.
- 68.00 Descend abrupt N. slope.
- 79.43 Proportionate distance; on steep N. slope, 640 ft. below $\frac{1}{4}$ section corner.

Set an iron post. 3 ft. long, 2 ins. diam., 27 ins. in the ground, for corner of sections 1, 6, 7, and 12, with brass cap marked

T9N
R3E | R4E
S1 | S6

S12 | S7
1940

from which

A balsam, 16 ins. diam., bears N.81°45'E., 70 links dist., marked T9NR4ES6BT

A balsam, 12 ins. diam., bears S.20°45'E., 58 links dist., marked T9NR4ES7BT

A balsam, 6 ins. diam., bears S.10°15'W., 65 links dist., marked T9NR3ES12BT

An aspen, 5 ins. diam., bears N.53°W., 6 links dist., marked T9NR3ES1BT

Land, mountainous, with steep slopes.

Soil, Rocky, mountain loam; 3rd rate.

Timber, aspen, balsam, and Douglas fir on portion of mile.

Undergrowth, chokecherry, service berry, nine bark, mountain laurel, and sagebrush. Medium growth of weeds and grass.

Good grazing land.

N.0°34'W., between sections 1 and 6.

Descend N. slope, over mountainous land, through dense aspen, balsam, and undergrowth of choke cherry, nine bark, and mountain laurel.

DEPENDENT RESURVEY OF WEST BOUNDARY, T. 9 N., R. 4 E.

Chains	
6.50	Bottom of canyon, 75 ft. below section corner, course N.35°W.; trail along canyon; ascend SW. slope, leaving timber, and entering mahogany.
14.00	Top of ascent, 200 ft. above canyon, slopes W.; descend.
18.00	Draw, 80 ft. below top of ascent, course W.; ascend.
30.00	Spur, 100 ft. above draw, slopes N.60°W.; descend.
39.71	Proportionate distance; on NW. slope, 150 ft. below spur. Set an iron post, 3 ft. long, 1 in. diam., 15 ins. in the ground to solid rock, and in mound of stone to top, for $\frac{1}{4}$ section corner, with brass cap marked
	$\frac{1}{4}$ S1/S6 1940
	from which
	A mahogany, 8 ins. diam., bears N.58°E., 19 links dist., marked $\frac{1}{4}$ S6BT
	A mahogany, 5 ins. diam., bears S.83°45'W., 22 links dist., marked $\frac{1}{4}$ S1BT
50.90	Canyon, 230 ft. below $\frac{1}{4}$ section corner, course N.60°W.; ascend SW. slope.
57.00	Top of ascent, 210 ft. above canyon, slopes W.; descend.
64.30	Draw, 60 ft. below top of ascent, course S.80°W.; ascend SW. slope, leaving timber.
79.43	The corner of Ts. 9 and 10 N., Rs. 3 and 4 E., which is a limestone, 24x20x20 ins., firmly set, and marked 6 notches on N., S., E., and W. edges. At point for corner. Set an iron post, 3 ft. long, 3 ins. diam., 27 ins. in the ground, with original corner monument deposited at base, for corner of Ts. 9 and 10 N., Rs. 3 and 4 E., with brass cap marked
	T10N R3E R4E S36 S31 S1 S6 T9N 1940
	raise a mound of stone, 4 ft. base, 3 ft. high, S. of corner.
	Corner stands on steep W. slope, 90 ft. above draw.
	Land, mountainous, with steep slopes. Soil, rocky, sandy mountain loam; 3rd rate. Timber, aspen and balsam. Undergrowth, chokecherry, service berry, sagebrush, nine bark, mountain laurel, and mahogany. Medium growth of weeds and grass. Good grazing land.

DEPENDENT RESURVEY OF NORTH BOUNDARY, T. 9 N., R. 4 E.

Chains

Reestablishment of Surveys executed by
J. H. Martineau, Deputy Surveyor, in 1877.

From the corner of Ts. 9 and 10 N., Rs. 4 and 5 E., which is an iron post, 3 ins. diameter, set, marked and witnessed as described in the official records.

N. 69° 58' W., between sections 1 and 36.

Ascend E. slope, over mountainous land, through medium dense fir, spruce, and aspen timber, and undergrowth of sagebrush, nine bark, chokecherry, and mountain laurel.

36.00 Enter scattered timber, bears N & S.

39.98 Proportionate distance; on ridge and divide of drainage, 460 ft. above Tp. corner, bears N. and S.

Set an iron post, 3 ft. long, 1 in. diameter, 6 ins. in the ground to solid rock, and in a mound of stone to top, for $\frac{1}{2}$ section corner, with brass cap marked

$$\frac{1}{2} \begin{array}{r} \text{S 36} \\ \hline \text{S 1} \\ 1940 \end{array}$$

from which

A limber pine, 8 ins. diam., bears N. 36° E., 206 links distant, marked $\frac{1}{2}$ S36BT

A Douglas fir, 18 ins. diam., bears S. 13° E., 169 links distant, marked $\frac{1}{2}$ S1BT

Descend W. slope.

53.00 Enter medium dense balsam and spruce, and scattered aspen timber, bears N & S.

75.40 Draw, 330 ft. below $\frac{1}{2}$ section corner, course N. 20° E.; ascend E. slope; leaving spruce, balsam, and entering aspen timber, bears N. 20° E. and S. 20° W. Old road, in draw, bears N. 20° E. and S. 20° W.

79.96 Proportionate distance; 40 ft. above draw.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for corner of sections 1, 2, 35, and 36, with brass cap marked

$$\begin{array}{r} \text{T10N R4E} \\ \text{S35 | S36} \\ \hline \text{S2 | S1} \\ \text{T9N} \\ 1940 \end{array}$$

from which

An aspen, 6 ins. diam., bears N. 52° 15' E., 37 links distant, marked T10NR4ES36BT

An aspen, 8 ins. diam., bears S. 69° 15' E., 32 links distant, marked T9NR4ES1BT

An aspen, 6 ins. diam., bears S. 65° 15' W., 28 links distant, marked T9NR4ES2BT

An aspen, 6 ins. diam., bears N. 57° 30' W., 21 links distant, marked T10NR4ES35 BT

DEPENDENT RESURVEY OF NORTH BOUNDARY, T. 9 N., R. 4 E.

Chains

Land, mountainous.
Soil, rocky, sandy mountain loam; 3rd rate.
Timber, balsam, spruce, and aspen.
Undergrowth, chokecherry, nine bark, sagebrush, and mountain laurel; medium growth of weeds and grass.
Good grazing.

N.89°58'W., between sections 2 and 35.

Ascend E. slope, over mountainous land, through medium dense aspen timber, and undergrowth of nine bark, chokecherry and sagebrush.

16.00 Spur, 50 ft. above section corner, projects N.; descend; leave aspen, and enter balsam and spruce timber, bears N. and S.

23.00 Leave timber, bears N. and S.

33.40 Draw, 190 ft. below spur, course N.; ascend E. slope, entering aspen and scattered balsam timber, bears N. and S.

39.98 On E. slope, 60 ft. above draw.

The $\frac{1}{4}$ section corner, which is a sandstone, 15x9x6 ins., firmly set, and marked $\frac{1}{4}$ on N. face.

At point for corner.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with original corner monument deposited at base, for $\frac{1}{4}$ section corner, with brass cap marked

$\frac{1}{4}$ S 35
S 8
1940

from which

An aspen, 7 ins. diam., bears S.53°30'E., 37 links distant, marked $\frac{1}{4}$ S2BT

An aspen, 6 ins. diam., bears N.65°30'W., 23 links distant, marked $\frac{1}{4}$ S35BT

Thence

S.88°50'W., with continuous measurement.

43.00 Spur, 30 ft. above $\frac{1}{4}$ section corner, projects N.; descend.

47.00 Head of draw, 30 ft. below spur, course N.; ascend.

69.00 Ridge, 170 ft. above draw, bears N. and S.; thence over rolling top of ridge.

80.82 Proportionate distance.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for corner of sections 2, 3, 34, and 35, with brass cap marked

T10N R4E
S34 | S35
S3 | S2
T9N
1940

from which

DEPENDENT RESURVEY OF NORTH BOUNDARY, T. 9 N., R. 4 E.

Chains

A Douglas fir, 16 ins. diam., bears N.79°E., 110 links distant, marked T10NR4ES35BT

A Douglas fir, 14 ins. diam., bears S.50°E., 84 links distant, marked T9NR4ES2BT

A Douglas fir, 8 ins. diam., bears S.52°15'W., 37 links distant, marked T9NR4ES3BT

A Douglas fir, 15 ins. diam., bears N.62°W., 33 links distant, marked T10NR4ES34BT

Land, mountainous.

Soil, sandy mountainous loam; rocky on portion; 2nd to 3rd rate.

Timber, aspen, balsam, Douglas fir and spruce.

Undergrowth, sagebrush, nine bark, chokecherry, and mountain laurel. Medium growth of weeds and grass. Good grazing land.

S.88°50'W., between sections 3 and 34.

Over rolling top of ridge, through medium dense aspen, and scattered fir timber, and medium dense undergrowth.

20.00 Edge of ridge, and rim of Blacksmith Fork, bears NW. and SE.; descend abrupt SW. slope.

40.84 Proportionate distance; on SW. slope, 290 ft. below section corner.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked

$$\begin{array}{r} \frac{1}{4} \text{ S } 34 \\ \hline \text{S } 3 \\ 1940 \end{array}$$

from which

A spruce, 10 ins. diam., bears N.2°15'E., 54 links distant, marked $\frac{1}{4}$ S34BT

A Douglas fir, 8 ins. diam., bears S.37°45'W., 35 links distant, marked $\frac{1}{4}$ S3BT

From this $\frac{1}{4}$ section corner small spring of clear water, bears S.49°40'E. 14.10 chains distant; galvanized troughs at spring.

54.00 Leave aspen timber and enter medium dense mahogany and scattered fir timber, bears N. and S.

59.70 Small draw, 280 ft. below $\frac{1}{4}$ section corner, course S.30°W.; descend along S. slope.

73.50 Draw, 480 ft. below $\frac{1}{4}$ section corner, course S.25°W.; ascend abrupt SE. slope.

81.68 Proportionate distance; on steep SE. slope, 150 ft. above draw.

Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground to solid rock, and in a mound of stone to top, for corner of sections 3, 4, 33, and 34, with brass cap marked

DEPENDENT RESURVEY OF NORTH BOUNDARY, T. 21 N., R. 4 E.

Chains

T10N R4E

S33 | S34

S4 | S3

T9N

1940

from which

A Douglas fir, 12 ins. diam., bears N. 78° 15' E., 226 links distant, marked T10NR4ES34BT

A Douglas fir, 18 ins. diam., bears S. 64° 15' E., 162 links distant, marked T9NR4ES3BT

A Douglas fir, 14 ins. diam., bears S. 39° 45' W., 163 links distant, marked T9NR4ES4BT

Land, mountainous; abrupt slopes. Soil, rocky, sandy and clay mountain loam; 3rd rate. Timber, aspen, balsam, Douglas fir and spruce. Undergrowth, mahogany, sagebrush, chokecherry, nine bark and mountain laurel. Medium growth of weeds and grass. Good grazing land.

S. 88° 50' W., between sections 4 and 33.

Ascend abrupt SE. slope, over mountainous land, through scattered fir timber, and undergrowth of mahogany and sagebrush.

6.00 Point of spur, 200 ft. above section corner, slopes S.; descend SW. slope, entering scattered aspen timber.

40.84 Proportionate distance; on SW. slope, 700 ft. below spur.

Set an iron post, 3 ft. long, 1 in. diam., 24 ins. in the ground to solid rock, and in a mound of stone to top, for $\frac{1}{4}$ section corner, with brass cap marked

$\frac{1}{4}$ S 33
S 4
1940

from which

An aspen, 4 ins. diam., bears N. 2° E., 10 links distant, marked $\frac{1}{4}$ S33BT

An aspen, 5 ins. diam., bears S. 2° W., 14 links distant, marked $\frac{1}{4}$ S4BT

80.00 Blacksmith Fork Canyon, 950 ft. below $\frac{1}{4}$ section corner, course N. 60° W.; ascend abrupt NE. slope.

81.68 Proportionate distance.

Set an iron post, 3 ft. long, 2 ins. diam., 16 ins. in the ground to solid rock, and in a mound of stone to top, for corner to sections 4, 5, 32, and 33, with brass cap marked

T10N R4E

S32 | S33

S5 | S4

T9N

1940

from which

A balsam, 10 ins. diam., bears N. 56° E., 11 links distant, marked T10NR4ES33BT

DEPENDENT RESURVEY OF NORTH BOUNDARY, T. 9 N., R. 4 E.

Chains

A balsam, 5 ins. diam., bears S.82°30'E., 26 links distant, marked T9NR4ES4BT

A balsam, 5 ins. diam., bears S.31°W., 14 links distant, marked T9NR4ES5BT

A balsam, 5 ins. diam., bears N.81°W., 28 links distant, marked T1ONR4ES32BT

Land, mountainous; steep, rocky slopes.

Soil, sandy and clay mountain loam; rocky; 3rd rate.

Timber, scattered balsam, Douglas fir and aspen.

Undergrowth, mahogany, chokecherry, nine bark, mountain laurel, and sagebrush. Medium growth of weeds and grass.

Good grazing land.

S.88°50'W., between sections 5 and 32.

Ascend abrupt NE. slope, broken by limestone ledges, over mountainous land, medium dense undergrowth and scattered timber.

37.00 Rocky point, 980 ft. above section corner, projects N.; abrupt descent over ledges.

60.84 Proportionate distance; on rocky NW. slope, 175 ft. below rocky point.

Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground to solid rock, and in a mound of stone to top, for section corner, with brass cap marked

S 32
S 5
1940

from which

A spruce, 12 ins. diam., bears N.74°30'E., 36 links distant, marked S32BT

A spruce, 20 ins. diam., bears S.20°E., 24 links distant, marked S5BT

43.50 Foot of descent, 150 ft. below section corner, slopes N.; ascend rocky NE. slope, broken by ledges.

71.00 Top of ascent, 230 ft. above foot of descent, slopes N.; descend NW. slope; enter medium dense timber.

81.68 Proportionate distance; on NW. slope 200 ft. below top of ascent.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for corner of sections 5, 6, 31, and 32, with brass cap marked

T1ON R4E
S31 S32
S6 S5
T9N
1940

from which

A spruce, 8 ins. diam., bears N.74°E., 30 links distant, marked T1ONR4ES32BT

DEPENDENT RESURVEY OF NORTH BOUNDARY, T. 9 N., R. 4 E.

Chains

A spruce, 12 ins. diam., bears S.14°15'E., 40 links distant, marked T9NR4ES5BT

A balsam, 8 ins. diam., bears S.78°15'W., 62 links distant, marked T9NR4ES6BT

A spruce, 8 ins. diam., bears N.79°W., 118 links distant, marked T10NR4ES31BT

Land, mountainous; steep, rocky slopes, broken by ledges. Soil, rocky, sandy and clay loam; 3rd to 4th rates. Timber, spruce and balsam. Undergrowth, chokecherry, nine bark, service berry, mountain laurel, and sagebrush. Medium growth of weeds and grass. Poor grazing land.

S.88°50'W., between sections 6 and 31.

Descend along steep N. slope, over mountainous land, through medium dense timber, and undergrowth.

- 9.00 Descend abrupt NW. slope; enter scattered timber.
- 35.50 Draw, 680 ft. below section corner, course N.20°W.; ascend steep E. slope.
- 39.50 Trail, bears N. and S.
- 40.84 Proportionate distance.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked

$$\frac{1}{4} \frac{S \ 31}{S \ 6}$$

1940

from which

A balsam, 8 ins. diam., bears N.19°45'E., 220 links distant, marked $\frac{1}{4}$ S31BT

A balsam, 6 ins. diam., bears S.1°15'E., 230 links distant, marked $\frac{1}{4}$ S6BT

- 53.00 Ridge, 410 ft. above draw, bears N.40°W. and S.40°E.; descend along S. slope. Leave timber, bears NW. and SE.
- 68.10 From this point, small spring of clear water, bears S.30°W. 4.80 chains distant.
- 70.00 Descend W. slope.
- 81.88 The corner of Ts. 9 and 10 N., Rs. 3 and 4 E., heretofore described.

Land, mountainous; steep slopes. Soil, rocky, sandy and clay mountain loam; 3rd rate. Timber, spruce and balsam on portion of mile. Undergrowth, sagebrush, chokecherry, nine bark, service berry, mountain laurel and mahogany. Medium growth of weeds and grass. Good grazing land.

DEPENDENT RESURVEY OF SUBDIVISION OF T. 9 N., R. 4 E.

Chains

Reestablishment of Surveys executed by J. H. Martineau, Deputy Surveyor, in 1877.

From the standard corner of sections 35 and 36, which is an iron post, 3 ins. diameter, firmly set, marked and witnessed as described in the official records.

Corner stands at corner of old pole fence, bearing N. and W.

Thence

N.0°31'E., between sections 35 and 36.

Descend gentle N. slope, over rolling mountainous land, through medium dense timber and undergrowth.

12.50 Draw, 130 ft. below standard section corner, course E.; ascend S. slope, leaving timber.


20.30 Corner of old pole fence, bears S. and W.

36.00 Ridge, 220 ft. above draw, bears E. and W.; descend N. slope.

39.00 Enter medium dense timber, bears E. and W.

40.92 Proportionate distance.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for 1/4 section corner, with brass cap marked



from which

An aspen, 8 ins. diam., bears N.62°E., 53 links distant, marked 1/4S36BT

An aspen, 8 ins. diam., bears S.81°15'W., 35 links distant, marked 1/4S35BT

50.30 Graded road, bears N.85°E., to Woodruff, Utah, and S.85°W., to Huntsville, Utah.


59.60 Draw, 120 ft. below 1/4 section corner, course N.70°E.; ascend.

64.00 Leave timber, bears E. and W.

74.00 Low spur, 30 ft. above draw, projects N.70°E.; descend N. slope, entering medium dense timber.

81.84 Proportionate distance; on gentle N. slope, 30 ft. below spur.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for corner of sections 25, 26, 35, and 36, with brass cap marked



raise a mound of stone, 3 ft. base, 3 ft. high, W. of corner.

No suitable bearing trees available.

Chains

51110

Land, rolling mountains; E. exposure.
 Soil, sandy clay mountain loam; 2nd rate.
 Timber, medium dense aspen.
 Undergrowth, sagebrush, nine bark, chokeberry and
 service berry; medium growth of weeds and grass.
 Excellent grazing land.

From the corner of sections 25, 30, 31, and 36, on E. bo
 ary of township, which is an iron post, 3 ins. diameter,
 firmly set, marked and witnessed, as described in the of
 ficial records.

S.89°33'W., between sections 25 and 36.

Ascend gentle SE. slope, over rolling mountainous land,
 through medium dense undergrowth.

10.00 Enter medium dense timber, bears NE. and SW.

20.00 Leave timber, bears NE. and SW.

26.00 Spur, 160 ft. above section corner, projects N.50°E.;
 descend over rolling NW. slope.

31.80 Graded road, bears N.50°E. to Woodruff, Utah, and S.50°W.
 to Huntsville, Utah.

40.21 Proportionate distance; on rolling NW. slope, 30 ft.
 below spur.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in
 the ground, for $\frac{1}{4}$ section corner, with brass cap marked

$\frac{1}{4}$ S 25
 S 36
 1940

of stone, $3\frac{1}{2}$ ft. base, 3 ft. high, N. of corner. raise a mound

59.00 Draw, 110 ft. below $\frac{1}{4}$ section corner, course NE.;
 ascend SE. slope, entering medium dense timber,
 bears NE. and SW.

63.00 Leave timber, bears NE. and SW.

65.00 Spur, 110 ft. above draw, projects NE.; thence over
 rolling top.

70.00 Enter medium dense timber, bears NE. and S.

76.00 Descend gradually along N. slope, bears NE. and SW.

80.43 The corner of sections 25, 26, 35, and 36.

Land, rolling mountains; NE. drainage.
 Soil, sandy, clay mountain loam; rocky in places; 2nd rate.
 Timber, medium dense aspen on portion of mile.
 Undergrowth, medium dense sagebrush and nine bark;
 medium growth of weeds and grass.
 Excellent grazing land.

N.0°32'E., between sections 25 and 26.

Descend gentle N. slope, over rolling mountains, through
 medium dense timber and undergrowth.

DEPENDENT RESURVEY OF SUBDIVISION, T. 9 N., R. 4 E.

Chains

3.50 Draw, 70 ft. below section corner, course N.80°E.; ascend.

10.00 Top of ascent, 80 ft. above draw, bears E. and W.; thence over rolling E. slope.

34.70 Swale, course E.

40.22 Proportionate distance.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked

$\frac{1}{4}$
S26|S25

1940

from which

An aspen, 7 ins. diam., bears N.56°E., 27 links distant, marked $\frac{1}{4}$ S25BT

An aspen, 6 ins. diam., bears S.46°W., 16 links distant, marked $\frac{1}{4}$ S26BT

76.60 Swale, course E.; ascend gentle SE. slope.

81.84 Proportionate distance.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for corner of sections 23, 24, 25, and 26, with brass cap marked

T9N R4E.

S23|S24

S26|S25

1940

from which

An aspen, 6 ins. diam., bears N.67°E., 221 links distant, marked T9NR4ES24BT

An aspen, 8 ins. diam., bears S.18°W., 228 links distant, marked T9NR4ES26BT

An aspen, 8 ins. diam., bears N.45°30'W., 111 links distant, marked T9NR4ES23BT

Land, rolling mountains; E. exposure and drainage.

Soil, sandy clay loam; 2nd rate.

Timber, medium dense aspen.

Undergrowth, sagebrush, nine bark, chokecherry, and young aspen; medium growth of weeds and grass.

Excellent grazing land.

From the corner of sections 24 and 25, on E. boundary of township, which is an iron post, 3 ins. diam., set, marked and witnessed, as described in the official records.

N.89°20'W., between sections 24 and 25.

Along rolling top of spur, over rolling land, through medium dense undergrowth.

40.19 The $\frac{1}{4}$ section corner, which is a sandstone, 10x10x2 ins., firmly set, in the ground, and old mound of stone, and marked $\frac{1}{4}$ on N. face.

At point for corner.

DEPENDENT RESURVEY OF SUBDIVISION, TOWN SEC, R. 4 E.

Chains

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with original corner monument deposited at base, for $\frac{1}{4}$ section corner, with brass cap marked

$\frac{1}{4}$ S 24

S 25

1940.

of stone, $3\frac{1}{2}$ ft. base, 3 ft. high, N. of corner.

Thence

S. $89^{\circ}01'W.$, with continuous measurement.

40.70 Old road, bears N. $30^{\circ}E$ and S. $30^{\circ}W$.

44.00 Descend NW. slope, into draw, bears NE. and SW.

47.40 Draw, 30 ft. below $\frac{1}{4}$ section corner, course NE.; old road, in draw; ascend gentle SE. slope.

69.00 Enter medium dense timber, bears N. and S.

80.40 The corner of sections 23, 24, 25, and 26, 140 ft. above draw.

Land, rolling mountains; E. exposure and drainage.

Soil, sandy clay loam; 2nd rate.

Timber, medium dense aspen on portion of mile.

Undergrowth, sagebrush and nine bark; medium growth of weeds and grass.

Excellent grazing land.

N. $0^{\circ}25'E.$, between sections 23 and 24.

Along gentle E. slope, over rolling mountainous land, through medium dense timber and undergrowth.

29.00 Descend N. slope, bears E. and W.

32.75 Draw, 70 ft. below section corner, course E.; ascend SE. slope.

40.92 Proportionate distance; on SE. slope, 100 ft. above draw.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked

$\frac{1}{4}$ S23|S24

1940

from which

An aspen, 5 ins. diam., bears N. $64^{\circ}15'E.$, 59 links distant, marked $\frac{1}{4}$ S24BT

An aspen, 6 ins. diam., bears S. $23^{\circ}15'W.$, 150 links distant, marked $\frac{1}{4}$ S23BT

50.00 Top of ascent, 20 ft. above $\frac{1}{4}$ section corner, slopes E.; descend NE. slope.

63.00 Draw, 80 ft. below top of ascent, course E.; ascend SE. slope.

70.00 Top of ascent, 100 ft. above draw, bears E. and W.; thence along gentle E. slope.

DEPENDENT RESURVEY OF SUBDIVISION, T. 9 N., R. 4 E.

Chains

81.84

Proportionate distance.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for corner of sections 13, 14, 23, and 24, with brass cap marked

T9N	R4E
S14	S13
S23	S24
1940	

from which

An aspen, 6 ins. diam., bears N.72°E., 6 links distant, marked T9NR4ES13BT

An aspen, 8 ins. diam., bears S.33°45'E., 21 links distant, marked T9NR4ES24BT

An aspen, 6 ins. diam., bears S.50°45'W., 7 links distant, marked T9NR4ES23BT

An aspen, 6 ins. diam., bears N.58°30'W., 11 links distant, marked T9NR4ES14BT

Land, rolling mountains; E. exposure and drainage.

Soil, sancy clay loam; 2nd rate.

Timber, medium dense aspen.

Undergrowth, sagebrush, nine bark and sagebrush; medium growth of weeds and grass.

Excellent grazing land.

From the corner of sections 13 and 24, on E. boundary of township, which is an iron post, 3 ins. diameter, firmly set, marked and witnessed, as described in the official records.

S.87°19'W., between sections 13 and 24.

Over rolling land, with gentle SE. slope, through medium dense undergrowth.

40.35

In wide open swale, course SE.

The 1/4 section corner, which is a sandstone, 12x6x2 ins., firmly set, and marked 1/4 on N. face.

At point for corner.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with original corner monument, deposited at base, for 1/4 section corner, with brass cap marked

1/4	S 13
	S 24
	1940

raise a mound

of stone, 3 ft. base, 3 ft. high, N. of corner.

Thence

N.86°07'W., with continuous measurement.

59.30

Old road, bears N. and S.; ascend over gentle SE. slope.

60.00

Enter medium dense timber, bears N. and S.

DEPENDENT RESURVEY OF SUBDIVISION, T. 9 N., R. 4 E.

Chains

encl 20

80.70 The corner of sections 13, 14, 23, and 24, 250 ft. above $\frac{1}{4}$ section corner.

Land, rolling mountains; E. exposure and drainage.
Soil, sandy clay loam; 2nd rate.
Timber, medium dense aspen on portion of mile.
Undergrowth, sagebrush, chokecherry, and nine bark.
Medium growth of weeds and grass.
Excellent grazing land.

N. 0° 34' E., between sections 13 and 14.

Descend NE. slope, over rolling mountainous land, through medium dense aspen timber and undergrowth.

9.30 Draw, 90 ft. below section corner, course E.; ascend SE. slope.

34.00 Spur, 230 ft. above draw, projects E.; descend N. slope, entering scattered aspen, fir and spruce timber.

40.92 In small draw, 40 ft. below spur, course E.

The $\frac{1}{4}$ section corner, which is a limestone, 12x12x6 ins. firmly set, and marked $\frac{1}{4}$ on W. face.

At point for corner.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with original corner monument deposited at base, for $\frac{1}{4}$ section corner, with brass cap marked

$\frac{1}{4}$
S14 | S13
1940

from which

A balsam, 12 ins. diam., bears S. 34° 45' E., 102 links distant, marked $\frac{1}{4}$ S13BT

A balsam, 10 ins. diam., bears N. 40° 45' W., 30 links distant, marked $\frac{1}{4}$ S14BT

Thence

N. 0° 09' W., with continuous measurement.

Ascend S. slope.

52.00 Spur, 80 ft. above $\frac{1}{4}$ section corner, projects E.; descend NE. slope.

68.00 Enter medium dense aspen and fir timber, bears NW. and SE.

70.50 Draw, 75 ft. below spur, course S. 35° E.; old road, along draw; ascend SW. slope.

79.00 Leave timber, bears NW. and SE.

81.28 On SW. slope, 220 ft. above draw.

The corner of sections 11, 12, 13, and 14, which is a limestone, 16x10x6 ins. firmly set in the ground, and old mound of stone, and marked 1 notch on E, and 4 notches on S. edges.

DEPENDENT RESURVEY OF SUBDIVISION, T. 9 N., R. 4 E.

Chains

At point for corner.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, with original corner monument deposited at base, for corner of sections 11, 12, 13, and 14, with brass cap marked.

T9N R4E	
S11	S12
S14	S13
1940	

from which

A balsam, 10 ins. diam., bears S.21°30'W., 221 links distant, marked T9NR4ES14BT

Raise a mound of stone, 3½ ft. base, 3 ft. high, W. of corner.

Land, mountainous.
Soil, rocky, sandy clay loam; 2nd to 3rd rates.
Timber, aspen, balsam, Douglas fir and spruce on portions of mile.
Undergrowth, sagebrush, nine bark and chokecherry; medium growth of weeds and grass.
Excellent grazing land.

From the corner of sections 12 and 13, on E. boundary of township, which is an iron post, 3 ins. diameter, set, marked and witnessed, as described in the official records.

N.89°36'W., between sections 12 and 13.

Over rolling land, through medium dense undergrowth.

14.50 Old road, bears N. and SE.

25.80 Swale, course NE.; ascend gentle SE. slope.

36.00 Enter timber, bears N. and S.

40.67 On SE. slope, 120 ft. above swale.

The ¼ section corner, which is a sandstone, 36x10x6 ins., firmly set in the ground, and old mound of stone, and marked ¼ on N. face.

At point for corner.

Set an iron post, 3 ft. long, 1 in. diameter, 27 ins. in the ground, with original corner monument deposited at base, for ¼ section corner, with brass cap marked

¼	S 12
	S 13
	1940

from which

An aspen, 5 ins. diam., bears N.78°15'E., 181 links distant, marked ¼ S12BT

An aspen, 5 ins. diam., bears S.44°45'E., 113 links distant, marked ¼ S13BT

From this ¼ section corner, a small spring of clear water, bears N.8°25'E., 17.50 chains distant.

DEPENDENT RESURVEY OF SUBDIVISION, T. 9 N., R. 4 E.

Chains

Thence

N.89°37'W., with continuous measurement,

60.00 Leave timber, bears N. and S.

73.00 Spur, 400 ft above $\frac{1}{4}$ section corner, slopes SE.; descend SW. slope.

81.00 The corner of sections 11, 12, 13, and 14, 110 ft. below spur.
 Land, rolling and mountainous.
 Soil, sandy, clay loam, rocky on portions; 2nd to 3rd rates.
 Timber, aspen on portion of mile.
 Undergrowth, sagebrush and chokecherry; medium growth of weeds and grass.
 Excellent grazing land.

N.1°06'E., between sections 11 and 12.

Ascend SW. slope, over mountainous land, through medium dense undergrowth.

12.00 Spur, 250 ft. above section corner, slopes SE.; ascend along SE. slope.

22.00 Ridge, 330 ft. above section corner, bears N.15°E. and S.15°W., thence along W. slope.

34.00 Enter timber, bears E. and W.

39.88 Proportionate distance.

Set an iron post, 3 ft. long, 1 in. diameter, 27 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked

$\frac{1}{4}$
 S11|S12
 1940

from which

A Douglas fir, 8 ins. diam., bears N.52°E., 56 links distant, marked $\frac{1}{4}$ S12BF

A Douglas fir, 10 ins. diam., bears S.72°W., 13 links distant, marked $\frac{1}{4}$ S11BT

52.00 Swale, course W.; ascend S. slope.

67.00 Spur, 110 ft. above swale, projects SW.; descend NW. slope; entering scattered timber.

79.27 Proportionate distance; On NW. slope, 60 ft. below spur.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for corner of sections 1, 2, 11, and 12, with brass cap marked

T9N R4E
 S2|S1
 S11|S12
 1940

from which

A balsam, 6 ins. diam., bears N.6°E., 25 links distant, marked T9NR4ES1BT

DEPENDENT RESURVEY OF SUBDIVISION, T. 9 N., R. 4 E.

Chains

A limber pine, 24 ins. diam., bears S.4°30'E., 287 links distant, marked T9NR4ES12BT

A Douglas fir, 24 ins. diam., bears S.10°30'W., 295 links distant, marked T9NR4ES11BT

A Douglas fir, 5 ins. diam., bears N.78°30'W., 32 links distant, marked T9NR4ES2BT

Land, mountainous.
Soil, rocky, sandy clay; 3rd rate.
Timber, balsam, Douglas fir, spruce and aspen on portion of mile.
Undergrowth, sagebrush, nine bark, chokecherry, and service berry; medium growth of weeds and grass.
Excellent grazing land.

From the corner of sections 1 and 12, on E. boundary of township, which is an iron post, 3 ins. diameter, firmly set, marked and witnessed, as described in the official records.

S.89°42'W., between sections 1 and 12.

Ascend E. slope, over mountainous land, through medium dense timber and undergrowth.

30.00 Top of ascent, 330 ft. above section corner, slopes N.; descend.

35.50 Small draw, 30 ft. below top of ascent, course NE.; ascend E. slope.

40.65 Proportionate distance; on E. slope, 130 ft. above draw.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked

$$\frac{1}{4} \frac{S 1}{S 12} \\ 1940$$

from which

An aspen, 8 ins. diam., bears S.11°E., 25 links distant, marked $\frac{1}{4}$ S12BT

An aspen, 5 ins. diam., bears N.21°W., 17 links distant, marked $\frac{1}{4}$ S1BT

56.00 Point of spur, from W.; thence ascend along spur.

79.00 Ridge, and divide of drainage, 430 ft. above $\frac{1}{4}$ section corner, bears N. and S.; descend.

81.30 The corner of sections 1, 2, 11, and 12.

Land, mountainous.
Soil, rocky, sandy clay loam; 2nd rate.
Timber, medium dense aspen and scattered balsam, spruce, and Douglas fir.
Undergrowth, sagebrush, chokecherry, nine bark, young aspen and mountain laurel; medium growth of weeds and grass.
Excellent grazing land.

DEPENDENT RESURVEY OF SUBDIVISION, T. 9 N., R. 4 E.

Chains

N. 0° 58' E., between sections 1 and 2.

and 10

Descend gentle NW. slope, over mountainous land, through scattered timber, and medium dense undergrowth.

9.00 Ridge, and divide of drainage, bears NW. and S. 10° E.; descend NE. slope.

19.00 Head of draw, 70 ft. below section corner, course E.; ascend.

25.00 Ridge, and divide of drainage, bears E. and W., about 5 chains; thence S. 15° W., thence along gentle NW. slope.

28.00 Enter medium dense timber, bears E. and W.

34.00 Old road, bears NE. and SW.

39.00 Old road, bears W. and SE.

39.88 Proportionate distance.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked
$$\begin{array}{c} \frac{1}{4} \\ S2 \mid S1 \\ 1940 \end{array}$$

from which

An aspen, 4 ins. diam., bears N. 67° E., 43 links distant, marked $\frac{1}{4}$ S1BTAn aspen, 6 ins. diam., bears S. 37° W., 82 links distant, marked $\frac{1}{4}$ S2BT73.00 Draw, 150 ft. below $\frac{1}{4}$ section corner, course N. 30° E.; old road, in draw; ascend.

79.80 The corner of sections 1, 2, 35, and 36, on N. boundary of township, heretofore described.

Land, mountainous.

Soil, sandy clay loam, rocky on portion of mile; 2nd to 3rd rate.

Timber, aspen, spruce, balsam and Douglas fir.

Undergrowth, sagebrush, nine bark, chokecherry, and mountain laurel; medium growth of weeds and grass.

Excellent grazing land.

From the standard corner of sections 34 and 35, on S. boundary of township, which is an iron post, 3 ins. diam., set. marked and witnessed, as described in the official records.

N. 0° 19' E., between sections 34 and 35.

Ascend gentle S. slope, over mountainous land, through medium dense timber and undergrowth.

17.00 Spur, 130 ft. above standard section corner, slopes E.; descend.

29.80 Draw, 120 ft. below spur, course E.; ascend SE. slope.

36.00 Top of ascent, 70 ft. above draw, slopes E.; descend NE. slope.

DEPENDENT RESURVEY OF SUBDIVISION, T. 9 N., R. 4 E.

Chains

40.48 Proportionate distance; on NE. slope, 30 ft. below top of ascent.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked

S34 | S35

1940

from which

An aspen, 5 ins. diam., bears S.16°E., 100 links distant, marked $\frac{1}{4}$ S35BT

An aspen, 5 ins. diam., bears S.44°W., 54 links distant, marked $\frac{1}{4}$ S34BT

47.70 Draw, 80 ft. below $\frac{1}{4}$ section corner, course SE.; ascend SE. slope.

51.00 Leave timber, bears NE. and W.

55.00 Graded road, bears N.78°E., to Woodruff, Utah, and S.78°W., to Huntsville, Utah.

61.00 Spur, 220 ft. above draw, slopes E.; descend NE. slope; entering medium dense timber, bears E. and W.

72.00 Draw, 160 ft. below spur, course E.; ascend S. slope.

80.96 Proportionate distance; on S. slope, 170 ft. above draw.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for corner of sections 26, 27, 34, and 35, with brass cap marked

T9N R4E

S27 | S26

S34 | S35

1940

from which

A Douglas fir, 10 ins. diam., bears N.39°45'E., 140 links distant, marked T9NR4ES26BT

A Douglas fir, 10 ins. diam., bears S.55°45'E., 131 links distant, marked T9NR4ES35BT

A Douglas fir, 36 ins. diam., bears S.44°15'W., 60 links distant, marked T9NR4ES34BT

A Douglas fir, 12 ins. diam., bears N.84°30'W., 103 links distant, marked T9NR4ES27BT

Land, mountainous.

Soil, sandy, clay mountain loam; 1st to 2nd rates.

Timber, medium dense aspen and scattered Douglas fir.

Undergrowth, sagebrush, nine bark, and chokecherry;

medium growth of weeds and grass.

Excellent grazing land.

From the corner of sections 25, 26, 35, and 36.

S.88°55'W., between sections 26 and 35.

Descend along gentle N. slope, over mountainous land, through medium dense timber and undergrowth.

DEPENDENT RESURVEY OF SUBDIVISION, T. 9 N., R. 4 E.

Chains

- 17.50 Draw, 30 ft. below section corner, course N.70°E.; ascend SE. slope.
- 35.00 Ascend E. slope, bears N.60°E. and S.60°W.
- 40.23 Proportionate distance; on gentle E. slope, 140 ft. above draw.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked

$\frac{1}{4}$ $\frac{S\ 26}{S\ 35}$
1940

An aspen, 8 ins. diam., bears N.9°30'W., 48 links distant, marked $\frac{1}{4}$ S26BT from which

An aspen, 5 ins. diam., bears S.48°30'W., 45 links distant, marked $\frac{1}{4}$ S35BT

- 64.00 Enter scattered timber, bears N. and S.
- 69.00 Spur, 440 ft. above $\frac{1}{4}$ section corner, slopes SE.; descend along S. slope.
- 80.47 The corner of sections 26, 27, 34, and 35, 30 ft. below spur.

Land, mountainous.

Soil, sandy, clay mountain loam, rocky on portion of mile; 1st to 3rd rate.

Timber, medium dense aspen on portion of mile, and scattered Douglas fir, balsam and spruce on mile.

Undergrowth, sagebrush, nine bark and chokecherry; medium growth of weeds and grass.

Excellent grazing land.

N.0°34'E., between sections 26 and 27.

Ascend S. slope, over mountainous land, through scattered timber and medium dense undergrowth.

- 10.00 Spur, 60 ft. above section corner, projects E.; descend along E. slope:
- 16.50 Draw, 30 ft. below spur, course E.; ascend SE. slope.
- 30.00 Top of ascent, 160 ft. above draw, slopes E.; descend NE. slope.
- 37.00 Draw, 120 ft. below top of ascent, course S.75°E., ascend S. slope.
- 40.48 Proportionate distance; on S. slope, 80 ft. above draw.
- Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground, to solid rock, and in mound of stone to top, for $\frac{1}{4}$ section corner, with brass cap marked

$\frac{1}{4}$
S27/S26
1940

from which

A spruce, 20 ins. diam., bears N.51°30'E., 128 links distant, marked $\frac{1}{4}$ S26BT

DEPENDENT RESURVEY OF SUBDIVISION, T. 9 N., R. 4 E.

Chains

A spruce, 36 ins. diam., bears S.67°45'W., 160 links distant, marked $\frac{1}{4}$ S27BT

57.00 Rocky point of spur, 350 ft. above $\frac{1}{4}$ section corner, slopes E.; descend NE. slope.

67.00 Enter medium dense timber, bears E. and W.

70.00 Spur, projects NE.; descend over gentle N. slope.

80.96 Proportionate distance; on gentle N. slope, 220 ft. below point of spur.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for corner of sections 22, 23, 26, and 27, with brass cap marked

T9N	R4E
S22	S23
S27	S26
1940	

from which

A balsam, 6 ins. diam., bears N.32°15'E., 120 links distant, marked T9NR4ES23BT

A spruce, 16 ins. diam., bears S.46°E., 100 links distant, marked T9NR4ES26BT

A Douglas fir, 12 ins. diam., bears S.32°30'W., 153 links distant, marked T9NR4ES27BT

A balsam, 5 ins. diam., bears N.6°W., 111 links distant, marked T9NR4ES22BT

Land, mountainous.

Soil, rocky, sandy loam; 3rd rate.

Timber, aspen, spruce, Douglas fir and balsam.

Undergrowth, sagebrush, nine bark, and chokecherry; medium growth of weeds and grass.

Excellent grazing land.

From the corner of sections 23, 24, 25, and 26.

S.88°17'W., between sections 23 and 26.

Ascend SE. slope, over mountainous land, through medium dense timber and undergrowth.

32.00 Enter scattered timber, bears N. and S.

40.21 Proportionate distance; on SE. slope, 350 ft. above section corner.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked

$\frac{1}{4}$	S 23
	S 26
1940	

from which

An aspen, 6 ins. diam., bears N.4°30'E., 157 links distant, marked $\frac{1}{4}$ S23BT

An aspen, 5 ins. diam., bears S.4°45'W., 91 links distant, marked $\frac{1}{4}$ S26BT

DEPENDENT RESURVEY OF SUBDIVISION, T. 4 N., R. 4 E.

Chains	
53.00	Enter medium dense timber, bears N. and S.
55.00	Spur, projects S.; thence along S. slope.
61.00	Enter scattered timber, bears N. and S.
63.00	Spur, projects N.80°E.; ascend abrupt E. slope.
78.00	Rocky point of spur, 460 ft. above $\frac{1}{4}$ section corner; projects N.; thence along N. slope.
80.42	The corner of sections 22, 23, 26, and 27.
	<p>Land, mountainous. Soil, sandy clay mountain loam; rocky on portions; 2nd to 3rd rate. Timber, aspen, and scattered spruce, balsam and Douglas fir. Undergrowth, sagebrush, chokecherry, nine bark, and mountain laurel; medium growth of weeds and grass. Excellent grazing land.</p>
	N.0°18'E., between sections 22 and 23.
	Descend N. slope, over mountainous land, through medium dense timber and undergrowth.
12.30	Draw, 220 ft. below section corner, course N.75°E.; ascend; leaving timber.
15.00	Top of ascent, 50 ft. above draw, slopes E.; descend along E. slope.
20.00	Enter medium dense timber, bears NW. and SE.; thence along gentle E. slope.
39.70	Draw, 150 ft. below top of ascent, course S.75°E.; ascend S. slope; entering scattered timber.
40.48	Proportionate distance.
	Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked
	$\begin{array}{c} \frac{1}{4} \\ S22/S23 \\ 1940 \end{array}$
	from which
	A balsam, 10 ins. diam., bears S.50°30'E., 93 links distant, marked $\frac{1}{4}$ S23BT
	A balsam, 8 ins. diam., bears S.83°15'W., 104 links distant, marked $\frac{1}{4}$ S22BT
60.00	Spur, with wide rolling top, 90 ft. above draw, projects E.; descend N. slope.
72.00	Open draw, 70 ft. below spur, course E.; ascend gentle S. slope.
80.96	Proportionate distance; on spur, with wide rolling top, 30 ft. above draw.
	Set an iron post, 3 ft. long, 2 ins. diam., 8 ins. in the ground, to solid rock, and in mound of stone to top, for corner of sections 14, 15, 22, and 23, with brass

DEPENDENT RESURVEY OF SUBDIVISION, T. 9 N., R. 4 E.

Chains

cap marked

T9N R4E

S15 | S14

S22 | S23

1940

from which

A Douglas fir, 16 ins. diam., bears N.14°45'E., 165 links distant, marked T9NR4ES14BT

A Douglas fir, 20 ins. diam., bears S.54°E., 229 links distant, marked T9NR4ES23BT

A Douglas fir, 30 ins. diam., bears N.63°30'W., 116 links distant, marked T9NR4ES15BT

Land, mountainous; E. drainage and exposure.
Soil, rocky, sandy clay mountain loam; 3rd rate.
Timber, aspen, Douglas fir, balsam and spruce.
Undergrowth, sagebrush, chokecherry and nine bark;
medium growth of weeds and grass.
Excellent grazing land.

From the corner of sections 13, 14, 23, and 24.

S.87°37'W., between sections 14 and 23.

Ascend rolling E. slope, along wide top of spur, over mountainous land; through medium dense timber and undergrowth.

26.00 Enter scattered timber, bears N. and S.

40.31 Proportionate distance; 280 ft. above section corner.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked

$$\frac{1}{4} \frac{S 14}{S 23}$$

S 23

1940

from which

A balsam, 12 ins. diam., bears S.40°45'E., 82 links distant, marked $\frac{1}{4}$ S23BT

A balsam, 16 ins. diam., bears N.64°15'W., 102 links distant, marked $\frac{1}{4}$ S14BT

80.63 The corner of sections 14, 15, 22, and 23, 220 ft. above $\frac{1}{4}$ section corner.

Land, rolling mountains.
Soil, rocky, sandy clay mountain loam; 3rd rate.
Timber, aspen, balsam, spruce, and Douglas fir.
Undergrowth, sagebrush, nine bark, and chokecherry;
medium growth of weeds and grass.
Excellent grazing land.

N.0°05'E., between sections 14 and 15.

Descend gentle N. slope, over rolling mountainous land, through scattered timber, and medium dense undergrowth.

14.50 Swale, 30 ft. below section corner, course E.; ascend

DEPENDENT RESURVEY OF SUBDIVISION, T. 9 N., R. 4 E.

Chains	
	gentle SE. slope. enlace
25.00	Leave timber, bears NW. and SE.
32.00	Ridge, and divide of drainage, 50 ft. above swale, bears NE. and SW.; thence along W. slope.
40.48	Proportionate distance; on gentle W. slope. Set an iron post, 3 ft. long, 1 in. diam., 18 ins. in the ground to solid rock, and in mound of stone to top, for $\frac{1}{4}$ section corner, with brass cap marked
	$\frac{1}{4}$ S15 S14 1940
	deposit a limestone,
	8x4x4 ins., marked with a cross, at base of post.
53.00	Spur, projects W.; descend N. slope, entering dense timber, bears NE. and SW.
60.00	Foot of descent, bears E. and W.; thence along W. slope.
80.96	Proportionate distance; on gentle NW. slope. Set an iron post, 3 ft. long, 2 ins. diam., 24 ins. in the ground to solid rock, and in mound of stone to top, for corner of sections 10, 11, 14, and 15, with brass cap marked
	T9N R4E S10 S11 S15 S14 1940
	from which
	A balsam, 4 ins. diam., bears N.66°15'E., 120 links distant, marked T9NR4ES11BT
	A balsam, 6 ins. diam., bears S.29°15'E., 130 links distant, marked T9NR4ES14BT
	A balsam, 16 ins. diam., bears S.79°W., 101 links distant, marked T9NR4ES15BT
	A balsam, 5 ins. diam., bears N.12°W., 54 links distant, marked T9NR4ES10BT
	Land, rolling mountains. Soil, rocky, sandy clay mountain loam; 2nd to 3rd rate. Timber, aspen, balsam, Douglas fir and spruce on portion of mile. Undergrowth, sagebrush, nine bark, and chokecherry; medium growth of weeds and grass. Excellent grazing land.
	From the corner of sections 11, 12, 13, and 14. S.87°18'W., between sections 11 and 14. Descend SW. slope, over mountain land, through medium dense undergrowth.
3.00	Enter medium dense timber, bears NW. and SE.
6.50	Draw, 120 ft. below section corner, course S.30°E.;

DEPENDENT RESURVEY OF SUBDIVISION, T. 9 N., R. 4 E.

Chains

- old road, along draw; ascend NE. slope.
- 40.50 Proportionate distance; on NE. slope, 430 ft. above draw.
Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked
- $\frac{1}{4}$ $\frac{S11}{S14}$
1940
- from which
- A balsam, 10 ins. diam., bears N.22°30'E., 123 links distant, marked $\frac{1}{4}$ S11 BT
- A balsam, 10 ins. diam., bears S.13°30'W., 69 links distant, marked $\frac{1}{4}$ S14BT
- 54.00 Leave timber, bears N. and S.
- 58.00 Ridge, and divide of drainage, 30 ft. above $\frac{1}{4}$ section corner, bears N.30°E. and S.30°W.; descend W. slope.
- 68.00 Enter medium dense timber, bears N. and S.
- 81.00 The corner of sections 10, 11, 14, and 15, 220 ft. below ridge.
- Land, mountainous.
Soil, rocky, sandy clay mountain loam; 2nd to 3rd rate.
Timber, aspen, spruce, balsam, and Douglas fir on portion of mile.
Undergrowth, sagebrush, nine bark, and chokecherry; medium growth of weeds and grass.
Excellent grazing land.
-
- N.1°02'E., between sections 10 and 11.
- Descend NW. slope, over mountainous land, through medium dense undergrowth and timber.
- 3.70 Draw, 30 ft. below section corner, course SW.; ascend S. slope; leaving timber.
- 4.50 Old road, bears NE. and SW.
- 16.00 Spur, 200 ft. above draw, projects W.; thence along W. slope.
- 26.50 Head of swale, course SW.; thence over rolling top of mountain, entering medium dense timber.
- 40.48 Proportionate distance; on rolling top of ridge, bears E. and W.
- Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked
- $\frac{1}{4}$ S10|S11
1940
- from which
- A balsam, 8 ins. diam., bears S.8°E., 42 links distant, marked $\frac{1}{4}$ S11BT

DEPENDENT SURVEY OF SUBDIVISION, T. 20 N., R. 4 E.

Chains

- A balsam, 10 ins. diam., bears N.76°W., 162 links dist., marked $\frac{1}{4}$ S10BT.
 - 44.00 Edge of ridge, bears N.60°W., and S.60°E., descend NE. slope.
 - 62.70 Draw, 250 ft. below ridge, course N.30°E.; ascend SE. slope.
 - 80.96 Proportionate distance; on SE. slope, 150 ft. above draw
- Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for corner of sections 2, 3, 10, and 11, with brass cap marked

T9N R4E
 S3 | S2
 S10 | S11
 1940

from which

- A juniper, 5 ins. diam., bears N.6°45'E., 39 links distant, marked T9NR4ES2BT
- A limber pine, 12 ins. diam., bears S.46°15'W., 48 links distant, marked T9NR4ES10BT
- A limber pine, 10 ins. diam., bears N.75°30'W., 148 links distant, marked T9NR4ES3BT

Land, mountainous.
 Soil, rocky, sandy clay mountain loam; 2nd to 3rd rates.
 Timber, aspen, balsam, Douglas fir and spruce on portion of mile.
 Undergrowth, sagebrush, nine bark, and chokecherry; medium growth of weeds and grass.
 Excellent grazing land.

From the corner of sections 1, 2, 11, and 12.

S.88°20'W., between sections 2 and 11.

Descend W. slope, over rolling mountainous land, through medium dense undergrowth.

- 4.00 Old road, bears N. and S.
 - 5.50 Enter medium dense timber, bears N. and S.
 - 26.70 Draw, 100 ft. below section corner, course SW.; ascend; entering scattered timber.
 - 35.90 Small draw, course S. from N.20°E.; ascend.
 - 40.56 Proportionate distance; on rocky point, 30 ft. above draw.
- Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground to solid rock, and in mound of stone to top, for $\frac{1}{4}$ section corner, with brass cap marked

$\frac{1}{4}$ S 2
 S 11
 1940

from which

DEPENDENT RESURVEY OF SUBDIVISION, T. 9 N., R. 4 E.

Chains

A Douglas fir, 18 ins. diam., bears S.78°W., 74 links distant, marked $\frac{1}{4}$ S11BT.

A Douglas fir, 30 ins. diam., bears N.42°W., 126 links distant, marked $\frac{1}{4}$ S2BT.

From this $\frac{1}{4}$ section corner.

Small spring of clear water, bears S.5°E., 33.90 chs. dist.

Small spring of clear water, bears S.5°20'W., 40.30 chs. dist.

Descend rocky SW. slope.

50.00 Enter medium dense timber, bears N. and S.

54.70 Canyon, 350 ft. below $\frac{1}{4}$ section corner, course NW.; ascend.

61.00 Top of ascent, 40 ft. above draw, slopes N.; descend.

69.60 Draw, 40 ft. below top of ascent, course N.30°E.; ascend E. slope.

81.12 The corner of sections 2, 3, 10, and 11, 180 ft. above draw.

Land, mountainous.

Soil, rocky, sandy clay loam; 3rd rate.

Timber, balsam, spruce, Douglas fir and aspen.

Undergrowth, sagebrush, nine bark, and chokecherry;

medium growth of weeds and grass.

Excellent grazing land.

N.1°08'E., between sections 2 and 3.

Ascend over mountainous land, through medium dense timber and undergrowth.

1.00 Top of ascent, 15 ft. above section corner, slopes E.; descend along E. slope.

10.00 Descend NE. slope.

30.00 Enter scattered timber, bears NW. and SE.

39.00 Blacksmith Fork Canyon, 330 ft. below section corner, course N.60°W.; ascend steep SW. slope.

40.48 Proportionate distance.

Set an iron post, 3 ft. long, 1 in. diam., 15 ins. in the ground to solid rock, and in mound of stone to top, for $\frac{1}{4}$ section corner, with brass cap marked

$\frac{1}{4}$
S3|S2
1940

from which.

A limber pine, 10 ins. diam., bears N.39°45'E., 115 links distant, marked $\frac{1}{4}$ S2BT.

A Douglas fir, 7 ins. diam., bears N.60°W., 31 links distant, marked $\frac{1}{4}$ S3BT.

54.00 Point of spur, 330 ft. above $\frac{1}{4}$ section corner, slopes SW.; thence along W. slope.

DEPENDENT RESURVEY OF SUBDIVISION, T. 9 N., R. 4 E.

Chains

64.00 Swale, course SW.; ascend SW. slope.

68.00 Ridge, 100 ft. above swale, bears N.70°W. and S.70°E.; thence over rolling top of ridge.

81.29 The corner of sections 2, 3, 34, and 35, on N. boundary of township, heretofore described.

Land, mountainous.
Soil, rocky, sandy clay mountain loam; 3rd rate.
Timber, balsam, spruce, Douglas fir and aspen.
Undergrowth, medium dense sagebrush, nine bark, and chokecherry; medium growth of weeds and grass.
Excellent grazing land.

From the standard corner of sections 33 and 34, on S. boundary of township, which is a conglomerate stone, 20x12x12 ins., firmly set in the ground, and old mound stone, and marked 3 notches on E. and W. edges, and SC on N. face.

At point for corner.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, with original corner monument, deposited at base, for standard corner of sections 33 and 34, with brass cap marked

SC	
T9N	R4E
S33	S34

1940

from which

An aspen, 5 ins. diam., bears N.34°E., 86 links distant, marked T9NR4ES34SGBT

An aspen, 6 ins. diam., bears N.71°15'W., 42 links distant, marked T9NR4ES33SGBT

Thence

North, between sections 33 and 34.

Ascend SE. slope, over mountainous land, through medium dense timber and undergrowth.

3.00 Top of ascent, 20 ft. above section corner, slopes E.; descend.

11.50 Draw, 110 ft. below top of ascent, course E.; ascend.

13.00 Enter scattered timber, bears NW. and SE.

17.00 Spur, 80 ft. above draw, projects E.; descend.

29.00 Draw, 110 ft. below spur, course SE.; ascend.

31.00 Enter medium dense timber, bears NW. and SE.

42.90 Proportionate distance; on SW. slope, 80 ft. above draw.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for section corner; with brass cap marked

SC	
T9N	R4E
S33	S34

1940

from which

DEPENDENT RESURVEY OF SUBDIVISION, T. 9 N., R. 4 E.

Chains

An aspen, 8 ins. diam., bears N.9°E., 39 links distant, marked $\frac{1}{2}$ S34BT

An aspen, 5 ins. diam., bears N.73°W., 40 links distant, marked $\frac{1}{2}$ S33BT

47.60 Graded road, bears S.60°E.; to Woodruff, Utah, and N.60°W., to Huntsville, Utah.

56.00 Ridge, with wide rolling top, 100 ft. above $\frac{1}{4}$ section corner, bears E. and W.; descend gentle NW. slope.

67.00 Enter scattered timber, bears E. and W.

69.10 Old road, bears NE. and SW.

71.00 Small swale, 60 ft. below ridge, course W.; thence along gentle W. slope; enter medium dense timber, bears E. and W.

85.81 The corner of sections 27, 28, 33, and 34, which is a sandstone, 15x8x8" firmly set, and marked 1 notch on S., and 3 notches on E. edges, from which

An aspen, 8 ins. diam., bears S.51°30'W., 37 links distant, marked T9NR4ES33BT

An aspen, 10 ins. diam., bears N.42°W., 61 links distant, marked T9NR4ES28BT

At point for corner.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, with original corner monument deposited at base, for corner of sections 27, 28, 33, and 34, with brass cap marked

T9N	R4E
S28	S27
S33	S34
1940	

from which.

new bearing trees.

A spruce, 9 ins. diam., bears N.11°45'E., 84 links distant, marked T9NR4ES27BT

A balsam, 12 ins. diam., bears S.49°E., 113 links distant, marked T9NR4ES34BT

From this section corner a small spring of clear water, and galvanized trough, bears S.55°10'W., 25.00 chains distant.

Land, mountainous.

Soil, sandy clay mountain loam; 1st to 2nd rate.

Timber, aspen, and scattered balsam and spruce.

Undergrowth, sagebrush, chokecherry, and nine bark; medium growth of weeds and grass.

Excellent grazing land.

From the corner of sections 26, 27, 34, and 35.

N.84°58'W., between sections 27 and 34.

Along S. slope, over mountainous land, through medium dense timber and undergrowth.

DEPENDENT RESURVEY OF SUBDIVISION, T. 2 N., R. 4 E.

Chains

- 4.50 Draw, course S.; ascend abrupt E. slope.
- 27.00 Rocky point of spur, 370 ft. above section corner, project S.; descend SW. slope.
- 40.55 On SW. slope, 140 ft. below spur.

The $\frac{1}{4}$ section corner, which is a limestone, 14x12x5 ins firmly set, marked $\frac{1}{4}$ on N. face, from which

A dead pine, 36 ins. diam., bears N.17°E., 42 links distant, marked $\frac{1}{4}$ S27BT

At point for corner.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, with original corner monument deposited at base, for $\frac{1}{4}$ section corner, with brass cap marked

$\frac{1}{4}$ $\frac{S\ 27}{S\ 34}$
1940

new bearing trees.

from which

A Douglas fir, 14 ins. diam., bears N.2°E., 22 links distant, marked $\frac{1}{4}$ S27BT

A Douglas fir, 10 ins. diam., bears S.16°20'W., 83 links distant, marked $\frac{1}{4}$ S34BT

Thence

N.88°50'W., with continuous measurement.

- 51.20 Draw, 100 ft. below $\frac{1}{4}$ section corner, course SE.; ascend gentle E. slope, leaving timber.
- 61.00 Enter medium dense timber, bears N. and S.
- 65.00 Ridge, 30 ft. above draw, bears N. and S.; thence over rolling top.
- 72.50 Old road, bears N.20°E. and S.20°W.
- 76.40 Old road, bears N. and S.
- 80.71 The corner of sections 27, 28, 33, and 34.

Land, mountainous.

Soil, rocky, sandy clay loam; 2nd to 3rd rate.

Timber, aspen, balsam, Douglas fir, and spruce.

Undergrowth, sagebrush, nine bark, and chokecherry; medium growth of weeds and grass.

Excellent grazing land.

N.0°50'E., between sections 27 and 28.

Over gently rolling top of mountain, through medium dense aspen and scattering balsam and spruce timber, and medium dense undergrowth.

- 39.89 Proportionate distance.

Set an iron post, 3 ft. long, $\frac{1}{2}$ in. diam., 27 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked

DEPENDENT RESURVEY OF SUBDIVISION, T. 9 N., R. 4 E.

Chains

$\frac{1}{2}$
 S28 | S27

1940

from which

An aspen, 8 ins. diam., bears S.61°E., 25 links distant, marked $\frac{1}{2}$ S27BT

An aspen, 10 ins. diam., bears S.47°W., 26 links distant, marked $\frac{1}{2}$ S28BT

- 46.00 Descend gentle NE. slope, leaving ridge, bears E. and W.
- 49.00 Leave timber, bears E. and W.
- 67.00 Draw, 120 ft. below ridge, course N.20°W.; ascend along gentle W. slope.
- 69.80 Old road, bears N.20°W., and S.20°E.
- 72.00 Enter medium dense balsam, spruce, and Douglas fir.
- 79.78 Proportionate distance.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for corner of sections 21, 22, 27, and 28, with brass cap marked

T9N R4E

S21 | S22

S28 | S27

1940

from which

A spruce, 18 ins. diam., bears N.79°E., 95 links distant, marked T9NR4ES22BT

A spruce, 16 ins. diam., bears S.27°E., 45 links distant, marked T9NR4ES27BT

A spruce, 20 ins. diam., bears S.30°30'W., 39 links distant, marked T9NR4ES28BT

A spruce, 24 ins. diam., bears N.78°15'W., 69 links distant, marked T9NR4ES21BT

From this section corner:

Small spring of clear water, bears N.58°W., 3.36 chains distant.

Small spring of clear water, bears N.47°15'W., 3.64 chains distant.

Land, rolling mountains.

Soil, sandy clay mountain loam; 1st to 2nd rate.

Timber, aspen, balsam, spruce, and Douglas fir on portion of mile.

Undergrowth, sagebrush, nine bark, and chokecherry; medium growth of weeds and grass.

Excellent grazing land.

From the corner of sections 28, 23, 26, and 27.

N.87°43'W., between sections 22 and 27.

DEPENDENT RESURVEY OF SUBDIVISION, T. 2 N., R. 4 E.

Chains

Along gentle N. slope, over mountainous land, through scattered timber, and medium dense undergrowth.

24.00 Draw, course N.70°E.; ascend gentle E. slope.

35.00 Old road, bears SE. and N.70°W.

40.14 Proportionate distance; on gentle E. slope, 80 ft. above draw.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked

$\frac{1}{4}$ $\frac{S\ 22}{S\ 27}$

1940

From which

A spruce, 10 ins. diam., bears S.72°30'W., 78 links distant, marked $\frac{1}{4}$ S27BT

A balsam, 12 ins. diam., bears N.25°15'W., 57 links distant, marked $\frac{1}{4}$ S22BT

From this $\frac{1}{4}$ section corner, small spring in head of draw, bears S.21°E. 22.68 chains distant.

Ascend gentle NE. slope.

58.00 Ridge, with wide rolling top, 40 ft. above $\frac{1}{4}$ section corner, bears N. and S.; descend W. slope.

80.28 The corner of sections 21, 22, 27, and 28, 230 ft. below ridge.

Land, mountainous.

Soil, rocky, sandy clay loam; 2nd to 3rd rate.

Timber, scattered balsam, spruce, Douglas fir, and aspen.

Undergrowth, sagebrush, nine bark, and chokecherry; medium growth of weeds and grass.

Excellent grazing land.

N.0°03'W., between sections 21 and 22.

Ascend along gentle W. slope, over rolling mountainous land, through medium dense undergrowth.

17.50 Small draw, course W.; ascend SW. slope.

27.00 Enter timber, bears E. and W.

33.00 Leave timber, bears E. and W.

39.89 Proportionate distance; on spur, 200 ft. above section corner, projects W.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked

$\frac{1}{4}$
S21 | S22
1940

of stone, $3\frac{1}{2}$ ft. base, 3 ft. high, W. of corner. raise a mound

From this $\frac{1}{4}$ section corner triangulation station, "Cristo"

DEPENDENT RESURVEY OF SUBDIVISION, T. 9 N., R. 4 E.

Chains

of the Coast and Geodetic Survey, latitude $41^{\circ}30'13''.282''$, longitude $111^{\circ}28'38''.993''$, bears $N.85^{\circ}30'E.$ 16.76 chains distant, a bronze cap, marked

CRISTO

1932

Descend NW. slope.

48.00 Enter medium dense timber, bears E. and W.

79.78 Proportionate distance; on NW. slope, 220 ft. below $\frac{1}{4}$ section corner.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for corner of sections 15, 16, 21, and 22, with brass cap marked

T9N R4E

S16 | S15

S21 | S22

1940

from which

A balsam, 10 ins. diam., bears $N.38^{\circ}45'E.$, 77 links distant, marked T9NR4ES15BT

A balsam, 8 ins. diam., bears $S.20^{\circ}E.$, 114 links distant, marked T9NR4ES22BT

A balsam, 10 ins. diam., bears $S.33^{\circ}30'W.$, 140 links distant, marked T9NR4ES21BT

A balsam, 8 ins. diam., bears $N.63^{\circ}30'W.$, 98 links distant, marked T9NR4ES16BT

Land, mountainous.

Soil, sandy clay loam; 2nd rate.

Timber, balsam, Douglas fir, spruce and aspen on portions of mile.

Undergrowth, sagebrush, nine bark, and service berry; medium growth of weeds and grass.

Excellent grazing land.

From the corner of sections 14, 15, 22, and 23.

$N.88^{\circ}30'W.$, between sections 15 and 22.

Ascend gentle E. slope, over mountainous land, through scattered timber, and medium dense undergrowth.

20.00 Ascend abrupt E. slope, bears N. and S.

28.00 Ridge, and divide of drainage, 320 ft. above section corner, bears N. and S.; descend NW. drainage.

34.50 Draw, 40 ft. below ridge, course N.; ascend E. slope.

40.31 Proportionate distance; on E. slope, 40 ft. above draw.

Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in the ground to solid rock, and in a mound of stone to top, for $\frac{1}{4}$ section corner, with brass cap marked

 $\frac{1}{4}$ S 15

S 22

1940

from which

DEPENDENT RESURVEY OF SUBDIVISION, T. 9 N., R. 4 E.

Chains	
	<p>A balsam, 12 ins. diam., bears N.58°30'E., 140 links distant, marked $\frac{1}{4}$S15BT.</p> <p>A spruce, 8 ins. diam., bears S.1°30'W., 17 links distant, marked $\frac{1}{4}$S22BT</p>
49.00	Spur, 80 ft. above $\frac{1}{4}$ section corner, projects N.; descend.
55.60	Old road, bears N.10°W. and S.10°E.
59.00	Enter medium dense timber, bears N. and S.
68.40	Draw, 160 ft. below spur, course N.15°W.; ascend.
75.00	Top of ascent, 30 ft. above draw, slopes N.; descend.
80.63	The corner of sections 15, 16, 21, and 22, 30 ft. below top of ascent.
	<p>Land, mountainous. Soil, rocky, sandy clay; 2nd to 3rd rate. Timber, balsam, spruce, Douglas fir, and aspen. Undergrowth, sagebrush, nine bark, and chokecherry; medium growth of weeds and grass. Excellent grazing land.</p>
	N.0°12'W., between sections 15 and 16.
	Descend NW. slope, over mountainous land, through medium dense timber and undergrowth.
12.50	Draw, 130 ft. below section corner, course S.60°W.; ascend SE. slope; leaving timber.
25.00	Top of spur, 100 ft. above draw, projects W.; thence over rolling top; entering medium dense timber.
39.89	Proportionate distance; on rolling top of spur.
	Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked
	$\frac{1}{4}$ S16 S15 1940
	from which
	An aspen, 8 ins. diam., bears S.63°30'E., 54 links distant, marked $\frac{1}{4}$ S15BT
	An aspen, 6 ins. diam., bears N.55°30'W., 20 links distant, marked $\frac{1}{4}$ S16BT
48.00	Descend N. slope, bears E. and W.
63.50	Draw, 150 ft. below spur, course E.; ascend.
71.00	Spur, 80 ft. above draw, projects E.; thence over rolling top of spur.
79.78	Proportionate distance; on rolling top of spur.
	Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for corner of sections 9, 10, 15, and 16, with brass cap marked

DEPENDENT RESURVEY OF SUBDIVISION, T. 9 N., R. 4 E.

Chains

T9N	R4E
S9	S10
S16	S15
1940	

from which

A balsam, 7 ins. diam., bears N.60½°E., 75 links distant, marked T9NR4ES10BT

A spruce, 9 ins. diam., bears S.57-3/4°E., 165 links distant, marked T9NR4ESI5BT

A Douglas fir, 16 ins. diam., bears S.34½°W., 85 links distant, marked T9NR4ES16BT

An aspen, 8 ins. diam., bears N.8½°W., 76 links distant, marked T9NR4ES9BT

Land, mountainous.

Soil, rocky, sandy clay loam; 2nd to 3rd rate.

Timber, aspen, and scattered Douglas fir, balsam and spruce.

Undergrowth, sagebrush, nine bark and chokecherry; medium growth of weeds and grass.

Excellent grazing land.

From the corner of sections 10, 11, 14, and 15.

N.89°22'W., between sections 10 and 15.

Descend gradual W. slope, over mountainous land, through medium dense timber, and undergrowth.

3.80 Trail and old road, bears N.15°E. and S.15°W.; leave timber.

4.00 Small draw, course S.20°W.; descend gentle SW. slope.

20.00 Draw, 60 ft. below section corner, course N.40°W.; ascend NE. slope.

21.00 Old road, bears NW. and SE.

28.00 Low spur, 60 ft. above draw, projects NW.; descend.

36.00 Draw, 60 ft. below spur, course NW.; ascend over rolling NE. slope.

40.37 Proportionate distance.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for ¼ section corner, with brass cap marked

¼	S 10
	S 15
	1940

raise a mound

of stone, 3½ ft. base, 3 ft. high, N. of corner.

48.00 Enter medium dense timber, bears NW. and SE.

55.00 Ascend abrupt E. slope, bears NW. and SE.

63.00 Point of spur, 360 ft. above ¼ section corner, thence over rolling top of spur.

DEPENDENT RESURVEY OF SUBDIVISION, T. 9 N., R. 4 E.

Chains

antised

80.74 The corner of sections 9, 10, 15, and 16.

Land, mountainous; NW. drainage. Soil, sandy, clay loam, rocky; 2nd to 3rd rate. Timber, aspen, spruce, Douglas fir and balsam on portions of mile. Undergrowth, sagebrush, service berry and chokecherry; medium growth of weeds and grass. Excellent grazing land.

N.0°33'E., between sections 9 and 10.

Over rolling top of spur, through medium dense timber and undergrowth.

3.00 Descend N. slope, leaving spur, bears E. and W.

8.50 Small draw, 70 ft. below section corner, course N.80°E.; ascend.

10.00 Leave timber, bears E. and W.

14.00 Point of spur, 50 ft. above draw, slopes E.; descend NE. slope.

34.00 Foot of descent, 200 ft. below point of spur, and head of small draw, course N.80°E.; thence over rolling top of spur.

39.89 Proportionate distance; on rolling spur.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked

$\frac{1}{4}$
S9 | S10
1940

from which

A balsam, 8 ins. diam., bears S.45°30'E., 75 links distant, marked $\frac{1}{4}$ S10BT

A balsam, 16 ins. diam., bears N.41°15'W., 17 links distant, marked S9BT

74.00 Descend N. slope, leaving spur, projects N.60°E.

79.78 Proportionate distance; on N. slope, 50 ft. below spur.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for corner of sections 3, 4, 9, and 10, with brass cap marked

T9N R4E
S4 | S3
S9 | S10
1940

from which

A Douglas fir, 9 ins. diam., bears N.60°E., 14 links distant, marked T9NR4ES3BT

A Douglas fir, 8 ins. diam., bears S.35°E., 11 links distant, marked T9NR4ES10BT

A balsam, 18 ins. diam., bears S.65°W., 33 links distant, marked T9NR4ES9BT

DEPENDENT RESURVEY OF SUBDIVISION, T. 9 N., R. 4 E.

Chains

A balsam, 9 ins. diam., bears N.54°W., 83 links dist., marked T9NR4ES4BT

Land, mountainous.
Soil, rocky, sandy clay loam; 2nd to 3rd rate.
Timber, aspen, balsam, Douglas fir and balsam on portions of mile.
Undergrowth, sagebrush, nine bark, chokecherry, and service berry; medium growth of weeds and grass.
Excellent grazing land.

From the corner of sections 2, 3, 10, and 11.

S.89°48'W., between sections 3 and 10.

Along SE. slope, over mountainous land, through medium dense timber and undergrowth.

- 5.00 Ascend E. slope.
14.00 Ridge, 130 ft. above section corner, bears N. and S.; descend gentle W. slope, over top of ridge.
27.00 Descend steep W. slope, bears N. and S.
32.00 Small draw, 210 ft. below ridge, course NW.; thence along N. slope.
39.00 Descend abrupt NW. slope.
40.68 Proportionate distance.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked

$$\begin{array}{r} \frac{1}{4} \frac{S 3}{S 10} \\ 1940 \end{array}$$

from which

A balsam, 8 ins. diam., bears N.69°45'E., 120 links distant, marked $\frac{1}{4}$ S3BT

A Douglas fir, 20 ins. diam., bears S.8°45'W., 35 links distant, marked $\frac{1}{4}$ S10BT

- 46.75 Canyon, 200 ft. below $\frac{1}{4}$ section corner, course N.; ascend abrupt E. slope.
56.00 Top of ascent, 320 ft. above canyon, slopes N.; thence along N. slope.
68.00 Small draw, course N.30°E.; ascend NE. slope.
75.00 Ascend gradually along N. slope.
81.36 The corner of sections 3, 4, 9, and 10, 100 ft. above draw.

Land, mountainous; drainage N.
Soil, sandy clay loam; 2nd to 3rd rate.
Timber, aspen and scattered Douglas fir, balsam, and spruce.
Undergrowth, sagebrush, chokecherry, and nine bark; medium growth of weeds and grass.
Excellent grazing land.

DEPENDENT RESURVEY OF SUBDIVISION, T. 9 N., R. 4 E.

Chains

N.0°50'E., between sections 3 and 4.

Descend N. slope, over mountainous land, through medium dense timber and undergrowth.

3.50 Head of small draw, 40 ft. below section corner, course N.80°E.; thence over rolling top of spur.

37.00 Rim of Blacksmith Fork Canyon, bears E. and W.; descend abrupt NW. slope.

39.89 Proportionate distance; on abrupt NW. slope, 70 ft. below rim of canyon.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked

$\frac{1}{4}$
S4|S3
1940

from which

A balsam, 6 ins. diam., bears S.65°E., 9 links distant, marked $\frac{1}{4}$ S3BT

A balsam, 7 ins. diam., bears S.85°W., 24 links distant, marked $\frac{1}{4}$ S4BT

57.00 Descend abrupt N. slope, broken by ledges.

68.50 Bottom of Blacksmith Fork Canyon, 800 ft. below $\frac{1}{4}$ section corner, course S.70°W.; ascend abrupt SE. slope, entering scattered timber and mahogany brush.

79.94 The corner of sections 3, 4, 33, and 34, on N. boundary of township, heretofore described, 550 ft. above canyon.

Land, mountainous; rolling on S. portion and abrupt slopes on N. portion.
Soil, rocky, sandy clay loam; 2nd to 3rd rate.
Timber, balsam, spruce, Douglas fir, and scattered aspen.
Undergrowth, sagebrush, nine bark, chokecherry, and on N. portion, mahogany brush; medium growth of weeds and grass.
Excellent grazing land on S. half, and fair grazing land on N. half mile.

From the standard corner of sections 32 and 33, on S. boundary of township, which is an iron post, 3 ins. diameter, firmly set, marked and witnessed, as described in the official records.

Thence

N.0°32'E., between sections 32 and 33.

Descend NW. slope, over mountainous land, through medium dense timber and undergrowth.

30.20 Draw, 340 ft. below standard section corner, course NE.; ascend gentle SE. slope, leaving timber.

34.00 Top of ascent, 30 ft. above draw, slopes NE.; descend along E. slope.

41.23 Proportionate distance; on E. slope, 25 ft. below top of ascent.

DEPENDENT RESURVEY OF SUBDIVISION, T. 9 N., R. 4 E.

Chains

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked

$\frac{1}{4}$
S32 | S33
1940

from which.

An aspen, 10 ins. diam., bears N.86°E., 444 links distant, marked $\frac{1}{4}$ S33BT.

An aspen, 8 ins. diam., bears S.86°15'W., 163 links distant, marked $\frac{1}{4}$ S32BT.

- 43.90 Draw, course N.75°E.; ascend SE. slope.
- 48.00 Top of ascent, 20 ft. above draw, slopes E.; descend NE. slope, entering medium dense timber.
- 57.50 Draw, 80 ft. below top of ascent, course N.70°E.; ascend.
- 63.00 Top of ascent, 40 ft. above draw, slopes E.; descend steep NE. slope.
- 72.30 Canyon, 370 ft. below top of ascent, course N.55°W.; ascend SW. slope; entering scattered timber.
- 81.00 Top of ascent, 200 ft. above draw, slopes SW.; descend NW. slope.
- 82.46 Proportionate distance; on NW. slope, 40 ft. below top of ascent.

Set an iron post, 3 ft. long, 2 ins. diam., 12 ins. in the ground, to solid rock, and in mound of stone to top, for corner of sections 28, 29, 32, and 33, with brass cap marked

T9N R4E
S29 | S28
S32 | S33
1940

from which

An aspen, 5 ins. diam., bears N.22°E., 374 links distant, marked T9NR4ES28BT

An aspen, 5 ins. diam., bears N.11°15'W., 331 links distant, marked T9NR4ES29BT

Land, mountainous.
Soil, rocky, sandy clay; 2nd to 3rd rate.
Timber, balsam, spruce, Douglas fir, and scattered aspen and yellow pine.
Undergrowth, sagebrush, nine bark, chokecherry, and service berry; medium growth of weeds and grass.
Excellent grazing land.

From the corner of sections 27, 28, 33, and 34.

S.89°39'W., between sections 28 and 33.

Descend W. slope, over mountainous land, through medium dense timber and undergrowth.

- 5.30 Draw, 60 ft. below section corner, course SW.; ascend SE. slope.

DEPENDENT RESURVEY OF SUBDIVISION, T. 9 N., R. 4 E.

Chains

ended

- 27.00 Top of ascent, 100 ft. above draw, slopes S.; descend SW. slope.
- 39.30 Draw, 140 ft. below top of ascent, course S.; ascend SE. slope.
- 40.00 The $\frac{1}{4}$ section corner, which is a sandstone, 14x10x6 ins. firmly set in old mound of stone, and marked $\frac{1}{4}$ on N. face.

At point for corner.

Set an iron post, 3 ft. long, 1 in. diam., 16 ins. in the ground to solid rock, and in mound of stone to top, with original corner monument deposited at base, for $\frac{1}{4}$ section corner, with brass cap marked.

 $\frac{1}{4}$ S 28

S 33

1940

from which

An aspen, 6 ins. diam., bears S. 63° 45' W., 51 links distant, marked $\frac{1}{4}$ S33BT

An aspen, 5 ins. diam., bears N. 5° 15' W., 16 links distant, marked $\frac{1}{4}$ S28BT

Thence

S. 85° 07' W., with continuous measurement.

- 47.00 Leave timber, bears N. and S.
- 54.00 Spur, 80 ft. above draw, projects SW.; descend SW. slope
- 72.00 Descend NW. slope.
- 79.91 The corner of sections 28, 29, 32, and 33, 320 ft. below spur.

Land, mountainous; SW. drainage.
Soil, sandy clay loam, rocky in places; 2nd to 3rd rate.
Timber, aspen, and scattered balsam on portion of mile.
Undergrowth, sagebrush, nine bark, chokecherry, and service berry; medium growth of weeds and grass.
Excellent grazing land.

N. 0° 22' E., between sections 28 and 29.

Descend NW. slope, over mountainous land, through scattered aspen timber, and medium dense undergrowth.

- 2.75 Draw, 50 ft. below section corner, course S. 60° W.; ascend S. slope.
- 10.00 Leave timber, bears E. and W.
- 38.00 Top of ridge, 430 ft. above draw, bears N. 60° W. and S. 60° E.; thence over rolling top of ridge.
- 41.23 Proportionate distance.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked

 $\frac{1}{4}$ S29/S28

1940

DEPENDENT RESURVEY OF SUBDIVISION, T. 9 N., R. 4 E.

Chains

- stone, 3 ft. base, 3 ft. high, W. of corner. raise a mound of
- 47.00 Leave ridge, bears N.60°W. and S.60°E.;
descend NE. slope.
- 55.00 Enter medium dense balsam, spruce and aspen timber,
bears E. and W.
- 66.00 Draw, 290 ft. below ridge, course NW.; ascend SW. slope,
leaving timber.
- 82.46 On spur, 190 ft. above draw, projects W.

The corner of sections 20, 21, 28, and 29, which is a sand-
stone, 24x20x3 ins., firmly set in the ground, and old
mound of stone, and marked 2 notches on S., and 4 notches
on E. edge.

At point for corner.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in
the ground, with original corner monument deposited at
base, for corner of sections 20, 21, 28, and 29, with
brass cap marked

T9N R4E

S20 | S21

S29 | S28

1940

stone, 3 ft. base, 3 ft. high, W. of corner. raise a mound of

Land, mountainous; drainage NW.

Soil, sandy clay loam; rocky in places; 2nd to 3rd rate.
Timber, aspen, balsam, and spruce on portions of mile.
Undergrowth, sagebrush, chokecherry and service berry;
medium growth of weeds and grass.
Excellent grazing land.

From the corner of sections 21, 22, 27, and 28.

S.88°57'W., between sections 21 and 28.

Descend gentle W. slope, over mountainous land, through
medium dense undergrowth.

- 3.75 Old road, bears N. and S.
- 5.75 Draw, 30 ft. below section corner, course N.15°W.;
ascend E. slope.
- 15.00 Top of ascent, 90 ft. above draw, slopes N.; descend;
entering timber.
- 22.50 Head of small draw, 20 ft. below top of ascent, course N.;
ascend E. slope.
- 35.00 Leave timber, bears N. and S.
- 40.15 On E. slope, 160 ft. above draw.

The section corner, which is a limestone, 20x12x4 ins.,
set in old mound of stone, and marked $\frac{1}{4}$ on N. face.

At point for corner.

Set an iron post, 3 ft. long, 1 in. diam., 10 ins. in

DEPENDENT RESURVEY OF SUBDIVISION, T.M.S.M., R. 4 E.

Chains

the ground, and in a mound of stone to top, with original corner monument, deposited at base, for $\frac{1}{4}$ section corner with brass cap marked

$\frac{1}{4}$ S 21

S 28

1940

from which

A spruce, 6 ins. diam., bears S. 28° 30' E., 406 links distant, marked $\frac{1}{4}$ S28BT

Thence

S. 89° 56' W., with continuous measurement.

- 46.00 Ridge, 40 ft. above $\frac{1}{4}$ section corner, bears N. and S.; descend SW. slope.
- 63.60 Draw, 150 ft. below ridge, course S.; ascend.
- 68.00 Spur, 20 ft. above draw, projects W. from N. 60° E.; thence along rolling top of spur.
- 80.47 The corner of sections 20, 21, 28, and 29.

Land, mountainous.

Soil, sandy clay loam; rocky in places; 2nd to 3rd rate.

Timber, spruce and balsam on portion of mile.

Undergrowth, sagebrush, nine bark and chokecherry; medium growth of weeds and grass.

Excellent grazing land.

N. 0° 11' W., between sections 20 and 21.

Descend N. slope, over rolling mountainous land, through medium dense undergrowth.

- 10.80 Draw, 80 ft. below section corner, course W.; ascend.
- 23.00 Ridge, 90 ft. above draw, bears N. 80° W. and S. 80° E.; descend gentle NW. slope.
- 25.50 Enter medium dense timber, bears E. and W.
- 39.79 Proportionate distance.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked

$\frac{1}{4}$ S20/S21

1940

from which

A balsam, 12 ins. diam., bears S. 86° 30' E., 218 links distant, marked $\frac{1}{4}$ S21BT

An aspen, 5 ins. diam., bears S. 44° 45' W., 28 links distant, marked $\frac{1}{4}$ S20BT

- 47.00 Swale, 80 ft. below ridge, course N. 50° W.; ascend gentle SW. slope.
- 49.00 Leave timber, bears E. and W.
- 55.00 Low spur, 20 ft. above swale, projects N. 80° W.;

DEPENDENT RESURVEY OF SUBDIVISION, T. 9 N., R. 4 E.

Chains

descend gentle NE. slope.

56.00 Enter medium dense timber, bears E. and W.

59.00 Leave timber, bears E. and W.

60.10 Draw, 70 ft. below spur, course E.; ascend gentle S. slope.

72.00 Enter medium dense timber, bears E. and W.

74.00 Low spur, 30 ft. above draw, slopes NE.; descend gentle N. slope.

79.58 Proportionate distance; on gentle N. slope.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for corner of sections 16, 17, 20, and 21, with brass cap marked

T9N R4E	
S17	S16
S20	S21

1940

from which

A balsam, 6 ins. diam., bears N.70°E., 32 links distant, marked T9NR4ES16BT

A balsam, 6 ins. diam., bears S.23°E., 25 links distant, marked T9NR4ES21BT

A balsam, 12 ins. diam., bears S.73°W., 30 links distant, marked T9NR4ES20BT

A balsam, 10 ins. diam., bears N.86°W., 33 links distant, marked T9NR4ES17BT

Land, rolling mountains.

Soil, sandy clay loam; 2nd rate.

Timber, balsam, spruce, and aspen on portions of mile.

Undergrowth, sagebrush, nine bark, and chokecherry; medium growth of weeds and grass.

Excellent grazing land.

From the corner of sections 15, 16, 21, and 22.

S.89°13'W., between sections 16 and 21.

Descend gentle NW. slope, over mountainous land, through scattered timber, and medium dense undergrowth.

20.00 Draw, 180 ft. below section corner, course NW.; ascend.

26.00 Top of ascent, 60 ft. above draw, slopes N.; descend.

32.50 Draw, 70 ft. below top of ascent, course N.; ascend.

38.00 Top of ascent, 40 ft. above draw, slopes N.; descend W. slope.

40.23 Proportionate distance.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for section corner, with brass cap marked

DEPENDENT RESURVEY OF SUBDIVISION, T. 9 N., R. 4 E.

Chains

S 16

S 21

1940

from which

A balsam, 6 ins. diam., bears N.7°E., 15 links distant, marked $\frac{1}{4}$ S16BT

A balsam, 10 ins. diam., bears S73°W., 48 links distant, marked $\frac{1}{4}$ S21BT

- 42.00 Leave timber, bears N. and S.
- 56.50 Old road, bears N.35°W. and S.35°E.
- 56.80 Draw, 120 ft. below $\frac{1}{4}$ section corner, course N.35°W.; ascend E. slope.
- 72.00 Spur, 200 ft. above draw, slopes N.; descend NW. slope.
- 75.00 Enter medium dense timber, bears N. and S.
- 80.46 The corner of sections 16, 17, 20, and 21, 60 ft. below spur.

Land, mountainous; drainage N.
Soil, rocky, sandy clay; 2nd to 3rd rate.
Timber, balsam, spruce, and aspen on portions of mile.
Undergrowth, sagebrush, service berry and nine bark;
medium growth of weeds and grass.
Excellent grazing land.

N.0°14'W., between sections 16 and 17.

Descend NW. slope, over mountainous land, through medium dense timber and undergrowth.

- 30.00 Leave timber, bears E. and W.
- 34.50 Draw, 220 ft. below section corner, course NE.; ascend along E. slope.
- 34.70 Old road, bears NE. and SW.
- 39.79 Proportionate distance.
- Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked

S17|S16

1940

from which

A balsam, 8 ins. diam., bears S.87°15'E., 234 links distant, marked $\frac{1}{4}$ S16BT

Raise a mound of stone, 3 ft. base, 3 ft. high, W. of corner.

- 46.00 Top of ascent, 15 ft. above $\frac{1}{4}$ section corner, slopes E.; descend NE. slope.
- 51.20 Old road, bears S.80°W. and E.
- 52.00 Draw, 50 ft. below top of ascent, course E.; ascend SE. slope.

DEPENDENT RESURVEY OF SUBDIVISION, T. 9 N., R. 4 E.

Chains

54.00 Enter scattered timber.

59.00 Top of ascent, 70 ft. above draw, slopes E.; descend NE. slope.

70.00 Draw, 60 ft. below top of ascent, course E.; ascend.

76.00 Spur, 50 ft. above draw, slopes E.; descend NE. slope.

79.58 Proportionate distance.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for corner of sections 8, 9, 16, and 17, with brass cap marked

T9N R4E

S8 | S9

S17 | S16

1940

from which

A balsam, 10 ins. diam., bears N.47°45'E., 164 links distant, marked T9NR4ES9BT

A balsam, 6 ins. diam., bears S.75°15'E., 183 links distant, marked T9NR4ES16BT

A balsam, 24 ins. diam., bears S.57°15'W., 502 links distant, marked T9NR4ES17BT

A balsam, 12 ins. diam., bears N.49°W., 395 links distant, marked T9NR4ES8BT

Land, mountainous; drainage NE.

Soil, rocky, sandy clay loam; 2nd to 3rd rate.

Timber, aspen, balsam, Douglas fir and spruce.

Undergrowth, sagebrush, chokecherry, and nine bark; medium growth of weeds and grass.

Excellent grazing land.

From the corner of sections 9, 10, 15, and 16.

S.89°04'W., between sections 9 and 16.

Over rolling top of ridge, through scattered timber and medium dense undergrowth.

23.00 Leave ridge, bears N. and S.; descend NW. slope.

40.24 Proportionate distance; on NW. slope, 200 ft. below ridge.

Set an iron post, 3 ft. long, 1 in. diam., 22 ins. in the ground to solid rock, and mound of stone to top, for $\frac{1}{4}$ section corner, with brass cap marked

$\frac{1}{4}$ $\frac{S 9}{S 16}$
1940

from which

A spruce, 10 ins. diam., bears S.28°30'W., 36 links distant, marked $\frac{1}{4}$ S16BT

A spruce, 8 ins. diam., bears N.88°45'W., 95 links distant, marked $\frac{1}{4}$ S9BT

DEPENDENT RESURVEY OF SUBDIVISION, T. 9 N., R. 4 E.

Chains

- 50.00 Draw, 40 ft. below $\frac{1}{4}$ section corner, course NW.; ascend.
- 53.00 Top of ascent, 20 ft. above draw, slopes N.; descend W. slope.
- 66.75 Draw, 270 ft. below top of ascent, course N.; ascend NE. slope.
- 80.48 The corner of sections 8, 9, 16, and 17, 120 ft. above draw.

Land, mountainous.

Soil, rocky, sandy clay loam; 2nd to 3rd rate.

Timber, scattered spruce, balsam, Douglas fir, and aspen.

Undergrowth, sagebrush, chokecherry, and mountain laurel medium growth of weeds and grass.

Excellent grazing.

N.0°01'W., between sections 8 and 9.

Descend NE. slope, over mountainous land, through scattered timber, and medium dense undergrowth.

- 3.00 Draw, 20 ft. below section corner, course E.; ascend.
- 18.00 Spur, 70 ft. above draw, projects E.; descend.
- 28.50 Draw, 260 ft. below spur, course N.20°W. from SW.; thence along broken W. slope.
- 36.50 Draw, course NE. from S.20°W.; ascend broken SE. slope.
- 39.79 Proportionate distance; on broken SE. slope, 100 ft. above draw.

Set an iron post, 3 ft. long, 1 in. diam., 15 ins. in the ground to solid rock, and in a mound of stone to top, for $\frac{1}{4}$ section corner, with brass cap marked

$\frac{1}{4}$
S8/S9
1940

from which

A spruce, 16 ins. diam., bears N.52°E., 74 links distant, marked $\frac{1}{4}$ S9BT

A spruce, 24 ins. diam., bears S.41°W., 80 links distant, marked $\frac{1}{4}$ S8BT

- 69.00 Top of ascent, 460 ft. above $\frac{1}{4}$ section corner, slopes E.; descend broken NE. slope.
- 79.58 Proportionate distance; on steep NE. slope, 140 ft. below top of ascent.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for corner of sections 4, 5, 8, and 9, with brass cap marked

T9N R4E
85/S4
 $\frac{1}{4}$
S8/S9
1940

from which

DEPENDENT RESURVEY OF SUBDIVISION, T. 9 N., R. 4 E.

Chains

- A balsam, 5 ins. diam., bears N.60°E., 31 links distant, marked T9NR4ES4BT
 A balsam, 5 ins. diam., bears S.38°E., 38 links distant, marked T9NR4ES9BT
 A spruce, 12 ins. diam., bears S.85°W., 22 links distant, marked T9NR4ES8BT
 A spruce, 6 ins. diam., bears N.17°W., 7 links distant, marked T9NR4ES5BT

Land, mountainous; steep broken slopes; drainage NE.
 Soil, rocky, sandy clay, 3rd rate.
 Timber, spruce, balsam, Douglas fir and aspen.
 Undergrowth, sagebrush, chokecherry, nine bark, and mountain laurel; medium growth of weeds and grass.
 Excellent grazing land.

From the corner of sections 3, 4, 9, and 10.

S.89°01'W., between sections 4 and 9.

Along gentle N. slope, over mountainous land, through dense timber and undergrowth.

- 10.00 Head of small draw, course W.80°E.; thence over rolling top of spur.
 24.00 Leave spur, projects N.; descend W. slope.
 30.60 Draw, 140 ft. below spur, course SW.; thence along S. slope.
 39.00 Small draw, course S.; ascend SE. slope.
 40.60 Proportionate distance; on SE. slope, 15 ft. above draw.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for section corner, with brass cap marked

S 4

S 5

1940

from which

A balsam, 8 ins. diam., bears N.70°E., 55 links distant, marked 284BT

A balsam, 12 ins. diam., bears S.45°W., 31 links distant, marked 289BT

- 46.00 Spur, 60 ft. above section corner, projects S.; descend abrupt, broken W. slope.
 63.00 Canyon, 600 ft. below spur, course N.; ascend abrupt, rocky E. slope.
 75.00 Rim and ledge, 600 ft. above canyon, bears N. and S.; ascend NE. slope.
 81.21 The corner of sections 4, 5, 8, and 9.

Land, mountainous; abrupt, broken slopes on W. half mile.
 Soil, rocky, sandy clay loam; 2nd to 3rd rate on E. half; rocky, sandy clay, 3rd to 4th rate, on W. half
 Timber, aspen and scattered spruce, balsam and Douglas fir.
 Undergrowth, sagebrush, service berry, and mountain laurel.

DEPENDENT RESERVE OF SUBDIVISION, TOWNSHIP, R. 4 E.

Chains

Excellent grazing land, $\frac{1}{2}$ half mile; fair grazing land on W. half mile.

N.0°33'E., between sections 4 and 5.

Descend NE. slope, over mountainous lands, through medium dense timber and undergrowth.

3.75 Draw, 50 ft. below section corner, course E.; ascend.

5.00 Top of ascent, 30 ft. above draw, slopes E.; descend along steep E. slope, broken by ledges.

39.79 Proportionate distances; on steep, rocky E. slope, broken by ledges.

Set an iron post, 3 ft. long, 1 in. diam., 6 ins. in the ground to solid rock, and in a mound of stone to top for $\frac{1}{4}$ section corner, with brass cap marked

S5|S4

1940

from which

A balsam, 24 ins. diam., bears S.79°E., 60 links distant, marked $\frac{1}{4}$ S4BT

A balsam, 10 ins. diam., bears S.71°W., 28 links distant, marked $\frac{1}{4}$ S5BT

Descend over NE. to N. slope, broken by ledges.

79.78 The corner of sections 4, 5, 32, and 33, on N. boundary of township, heretofore described, 1100 ft. below $\frac{1}{4}$ section corner.

Land, mountainous; steep, slopes, broken by ledges.

Soil, rocky, sandy loam; 4th rate.

Timber, balsam, spruce, Douglas fir and aspen.

Undergrowth, sagebrush, chokecherry, service berry, nine bark, and mountain laurel; medium growth of weeds and grass.

Fair grazing land.

From the standard corner of sections 31 and 32, on S. boundary of township, which is an iron post, 3 ins. diameter, set, marked and witnessed, as described in the official records.

Thence

N.0°36'E., between sections 31 and 32.

Ascend along E. slope, over mountainous land, through medium dense timber, and undergrowth.

6.00 Leave timber, bears NE. and W.

13.00 Top of ascent, 40 ft. above section corner, slopes E.; descend NE. slope, entering timber.

25.20 Head of small draw, 180 ft. below top of ascent, course N.30°E.; thence along E. slope,

35.00 Enter timber, bears N.30°E. and S.30°W.

DEPENDENT RESURVEY OF SUBDIVISION, T. 9 N., R. 4 E.

Chains

40.07 Proportionate distance; on E. slope.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked

S31 | S32

1940

from which

An aspen, 6 ins. diam., bears N.25°45'E., 126 links distant, marked $\frac{1}{4}$ S32BT

An aspen, 5 ins. diam., bears N.89°45'W., 178 links distant, marked $\frac{1}{4}$ S31BT

Ascend SE. slope.

47.00 Top of ascent, 70 ft. above $\frac{1}{4}$ section corner, slopes E.; descend NE. slope.

65.00 Leave timber, bears E. and W.

71.20 Draw, 330 ft. below top of ascent, course N.40°W.; ascend SW. slope.

80.14 Proportionate distance; on SW. slope, 90 ft. above draw.

Set an iron post, 3 ft. long, 2 ins. diam., 12 ins. in the ground to solid rock, and in mound of stone, to top, with a lava stone, 8x6x6 ins., deposited at base, for corner of sections 29, 30, 31, and 32, with brass cap marked

T9N R4E

S30 | S29

S31 | S32

1940

from which

A lone spruce, 16 ins. diam., bears N.74°30'E., 169 links distant, marked T9NR4ES29BT

Land, mountainous.

Soil, rocky, sandy clay loam; 2nd to 3rd rate.

Timber, medium dense aspen on portions of mile.

Undergrowth, sagebrush, nine bark, and chokecherry;

medium growth of weeds and grass.

Excellent grazing land.

From the corner of sections 28, 29, 32, and 33.

S.88°54'W., between sections 29 and 32.

Descend NE. slope, over mountainous land, through scattered timber, and medium dense undergrowth.

4.30 Small draw, course S.60°W.; thence along S. slope.

10.30 Canyon, 220 ft. below section corner, course N.55°W.; ascend NE. slope.

26.00 Spur, 210 ft. above canyon, projects NW.; descend NW. slope.

31.00 Enter dense timber, bears N. and S.

DEPENDENT RESURVEY OF SUBDIVISION, T. 9 N., R. 4 E.,

Chains

36.50 Draw, 300 ft. below spur; course NW.; thence ascend along N. slope.

59.82 Proportionate distance.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for section corner, with brass cap marked

$$\frac{1}{4} \begin{array}{r} S 29 \\ S 32 \\ 1940 \end{array}$$

from which

A balsam, 12 ins. diam., bears S.61°15'W., 50 links distant, marked $\frac{1}{4}$ S32BT

A balsam, 8 ins. diam., bears N.53°W., 26 links distant, marked $\frac{1}{4}$ S29BT

From this section corner;

A small spring of clear water, bears N.21°50'E., 9.77 chains distant; troughs at spring.

A log cabin, 18x16 ft., bears N.46°30'W., 6.18 chains distant.

47.00 Leave timber, bears N. and S.

56.00 Low pass, in spur, projecting NW.; old road, bears N. and E.; ascend gentle E. slope.

64.00 Top of ascent, 120 ft. above section corner, slopes S.; descend SW. slope.

79.65 The corner of sections 29, 30, 31, and 32, 260 ft. below top of ascent.

Land, mountainous; drainage NW.

Soil, rocky, sandy clay loam; 2nd to 3rd rate.

Timber, scattered balsam, spruce and pine on portion of mile.

Undergrowth, medium sagebrush and chokecherry; medium growth of weeds and grass.

Excellent grazing land.

From the corner of sections 25, 30, 31, and 36, on W. boundary of township, heretofore described.

N.89°13'E., between sections 30, and 31.

Ascend SW. slope, over mountainous land, through medium dense timber and undergrowth.

3.00 Top of ascent, 60 ft. above section corner, slopes S.; descend.

7.00 Small draw, 40 ft. below top of ascent, course SW.; ascend steep W. slope.

31.00 Spur, 490 ft. above section corner, projects N.; descend NE. slope; entering scattered timber.

39.89 Proportionate distance; on NE. slope, 100 ft. below spur.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in

DEPENDENT RESURVEY OF SUBDIVISION, T. 9 N., R. 4 E.

Chains

the ground, for $\frac{1}{4}$ section corner, with brass cap marked

$$\frac{1}{4} \begin{array}{r} \text{S } 30 \\ \hline \text{S } 31 \\ 1940 \end{array}$$

from which

A balsam, 4 ins. diam., bears S.47°E., 155 links distant, marked BT

An aspen, 6 ins. diam., bears N.0°45'W., 151 links distant, marked $\frac{1}{4}$ S30BT

51.00 Draw, 200 ft. below $\frac{1}{4}$ section corner, course N.10°E.; ascend.

56.00 Top of ascent, 100 ft. above draw, slopes N.; descend abrupt NE. slope.

72.00 Draw, 270 ft. below top of ascent, course NW.; ascend SW. slope, leaving timber.

79.67 The corner of sections 29, 30, 31, and 32, 200 ft. above draw.

Land, mountainous; drainage N.

Soil, rocky, sandy clay loam; 3rd rate.

Timber, balsam, juniper and pine on portion of mile.

Undergrowth, sagebrush and chokecherry; mahogany on W. portion of mile; medium growth of weeds and grass.

Excellent grazing land.

N.0°08'W., between sections 29 and 30.

Ascend SW. slope, over mountainous land, through medium dense undergrowth.

6.00 Enter scattered aspen and balsam timber, bears E. and W.

8.50 Small draw, course SW.; ascend S. slope.

22.00 Spur, 250 ft. above section corner, projects W.; descend abrupt N. slope; leaving timber.

38.75 Canyon, 580 ft. below spur, course N.80°W.; ascend abrupt S. slope; entering scattered mahogany brush.

40.07 Proportionate distance.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked

$$\frac{1}{4} \begin{array}{r} \text{S30} | \text{S29} \\ 1940 \end{array}$$

raise a mound

of stone, 3 $\frac{1}{2}$ ft. base, 3 ft. high, W. of corner.

56.00 Enter medium dense aspen timber, bears E. and W.

68.00 Spur, 660 ft. above canyon, projects W.; descend abrupt N. slope; entering balsam, spruce, and Douglas fir timber.

80.14 Proportionate distance; on abrupt N. slope, 240 ft. below spur.

DEPENDENT RESURVEY OF SUBDIVISION, S. 19 N., R. 4 E.

Chains

Set an iron post, 3 ft. long, 2 ins. diam., 12 ins. in the ground to solid rock, and in mound of stone to top, for corner of sections 19, 20, 39, and 30, with brass cap marked

T9N R4E

S19/S20

S30/S29

1940

from which

A spruce, 8 ins. diam., bears N.19°45'E., 60 links distant, marked T9NR4ES20BT

A spruce, 12 ins. diam., bears S.60°45'E., 26 links distant, marked T9NR4ES29BT

A spruce, 12 ins. diam., bears S.41°45'W., 13 links distant, marked T9NR4ES30BT

A limber pine, 12 ins. diam., bears N.29°15'W., 50 links distant, marked T9NR4ES19BT

Land, mountainous; abrupt slopes; drainage W.
Soil, rocky, sandy clay loam; 2nd to 3rd rate.
Timber, aspen, balsam, spruce, and Douglas fir on portions of mile.
Undergrowth, sagebrush, nine bark, and chokecherry; mahogany on portion of mile; medium growth of weeds and grass.
Excellent grazing land.

From the corner of sections 20, 21, 28, and 29.

S.87°15'W., between sections 20 and 29.

Descend SW. slope, over mountainous land, through medium dense undergrowth.

19.00 Draw, 290 ft. below section corner, course NW.; ascend NE. slope; entering medium dense timber.

28.00 Top of ascent, 90 ft. above draw, slopes N.; descend along steep N. slope.

40.18 Proportionate distance; on N. slope, 200 ft. below top of ascent.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{2}$ section corner, with brass cap marked

$$\frac{1}{2} \frac{S 20}{S 29}$$

1940

from which

An aspen, 10 ins. diam., bears S.27°15'E., 17 links distant, marked $\frac{1}{2}$ S29BT

An aspen, 6 ins. diam., bears N.21°15'W., 27 links distant, marked $\frac{1}{2}$ S20BT

80.37 The corner of sections 19, 20, 29, and 30, 220 ft. below $\frac{1}{2}$ section corner.

Land, mountainous; steep slopes; drainage W.
Soil, rocky, sandy clay; 2nd to 3rd rate.

DEPENDENT RESURVEY OF SUBDIVISION, T. 9 N., R. 4 E.

Chains

Timber, balsam, spruce, Douglas fir and aspen on portion of mile.
Undergrowth, sagebrush, nine bark, and chokecherry; medium growth of weeds and grass.
Excellent grazing land.

From the corner of sections 19, 24, 25, and 30, on W. boundary of township, heretofore described.

N.89°37'E., between sections 19 and 30.

Descend steep E. slope, over mountainous land, through dense aspen timber, and medium dense undergrowth.

- 5.00 Leave timber, bears N. and S.
22.00 Enter dense aspen timber, bears N. and S.
24.70 Small stream of clear water in canyon, 680 ft. below section corner, course N.20°W.; ascend abrupt NW. slope.
26.00 Leave aspen and enter scattered spruce and balsam timber, bears N. and S.
40.19 Proportionate distance; on steep NW. slope, 610 ft. above canyon.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked

$\frac{1}{4}$ $\frac{S\ 19}{S\ 30}$
1940

from which

A spruce, 12 ins. diam., bears S.50°30'E., 28 links distant, marked $\frac{1}{4}$ S30BT

A spruce, 12 ins. diam., bears N.7°15'W., 36 links distant, marked $\frac{1}{4}$ S19BT

- 43.00 Ascend along steep N. slope.
80.18 The corner of sections 19, 20, 29, and 30, 480 ft. above $\frac{1}{4}$ section corner.

Land, mountainous; steep slopes; drainage NW.
Soil, rocky, sandy clay; 2nd to 3rd rate.
Timber, aspen and scattered balsam and spruce on portions of mile.
Undergrowth, sagebrush, chokecherry, service berry, and mountain laurel; medium growth of weeds and grass.
Good grazing land.

N.0°16'W., between sections 19 and 20.

Descend abrupt N. slope, over mountainous land, through scattered spruce and balsam timber, and medium dense undergrowth.

- 10.80 Canyon, 540 ft. below section corner, course W.; ascend abrupt S. slope; entering scattered mahogany brush.
29.00 Top of ascent, on rocky point of spur, 660 ft. above canyon; thence along W. slope; entering medium dense balsam and spruce timber.

DEPENDENT RESURVEY OF SUBDIVISION, T. 9 N., R. 4 E.

Chains

40.07 Proportionate distance; on W. slope.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked

$\frac{1}{4}$
S19|S20
1940

from which

A Douglas fir, 10 ins. diam., bears N.72°30'E., 39 links distant, marked $\frac{1}{4}$ S20BT

An aspen, 8 ins. diam., bears S.82°15'W., 105 links distant, marked $\frac{1}{4}$ S19BT

- 41.00 Enter medium dense aspen timber, bears NE. and SW.
50.00 Enter scattered timber, bears E. and W.
63.00 Spur, 50 ft. above $\frac{1}{4}$ section corner, projects SW.; descend NW. slope.
71.70 Draw, 50 ft. below spur, course S.60°W.; ascend S. slope
77.00 Spur, 180 ft. above draw, projects W.; descend N. slope; entering medium dense spruce, balsam and Douglas fir.
80.14 Proportionate distance; on N. slope, 60 ft. below spur.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for corner of sections 17, 18, 19, and 20, with brass cap marked

T9N R4E
S18|S17
S19|S20
1940

from which

- A Douglas fir, 14 ins. diam., bears N.9°15'E., 31 links distant, marked T9NR4ES17BT
A Douglas fir, 8 ins. diam., bears S.66°15'E., 17 links distant, marked T9NR4ES20BT
A Douglas fir, 9 ins. diam., bears S.34°45'W., 58 links distant, marked T9NR4ES19BT
A Douglas fir, 18 ins. diam., bears N.71°30'W., 14 links distant, marked T9NR4ES18BT

Land, mountainous; abrupt slopes; drainage W.
Soil, rocky, sandy clay loam; 2nd to 3rd rate.
Timber, spruce, Douglas fir, balsam and aspen; medium growth of weeds and grass.
Fair grazing land.

From the corner of sections 16, 17, 20, and 21.

S.87°41'W., between sections 17 and 20.

Descend along rolling N. slope, over mountainous land, through medium dense aspen, spruce and fir timber, and medium dense undergrowth.

DEPENDENT RESURVEY OF SUBDIVISION, T. 9 N., R. 4 E.

Chains

- 15.00 Descend gentle NW. slope; entering scattered timber.
- 28.75 Draw, 140 ft. below section corner, course N.20°E.; ascend gentle E. slope.
- 40.23 Proportionate distance; on rolling top of spur, 90 ft. above draw, projects N.30°E.
- Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked
- $\frac{1}{4}$ $\frac{S\ 17}{S\ 20}$
1940
- from which
- An aspen, 8 ins. diam., bears N.0°15'E., 48 links distant, marked $\frac{1}{4}$ S17BT
- An aspen, 6 ins. diam., bears S.62°15'W., 85 links distant, marked $\frac{1}{4}$ S20BT
- From this $\frac{1}{4}$ section corner, a small spring of clear water, bears S.52°E., 10.65 chains distant.
- Descend gentle NW. slope.
- 47.00 Small draw, 20 ft. below $\frac{1}{4}$ section corner, course NE.; ascend NE. slope.
- 60.00 Ridge, 60 ft. above draw, bears N. and SE.; descend along N. slope.
- 67.00 Enter medium dense fir and spruce timber, bears N. and S.
- 80.47 The corner of sections 17, 18, 19, and 20, 160 ft. below ridge.
- Land, rolling mountains.
Soil, rocky, sandy clay loam; 2nd to 3rd rate.
Timber, aspen, balsam, spruce and Douglas fir on portions of mile.
Undergrowth, sagebrush, chokecherry, nine bark, and mountain laurel; medium growth of weeds and grass.
Excellent grazing land.
-
- From the corner of sections 13, 18, 19, and 24, on W. boundary, of township, heretofore described.
- N.89°33'E., between sections 18 and 19.
- Ascend NW. slope, over mountainous land, through medium dense undergrowth.
- 4.50 Spur, 60 ft. above section corner, projects S.20°W.; descend SE. slope.
- 7.20 From this point a small spring of clear water bears N.21°15'E. 11.50 chains distant; troughs at spring.
- 25.60 Draw, 140 ft. below spur, course S.30°W.; ascend over rolling NW. slope; entering dense aspen and scattered fir timber.
- 40.37 Proportionate distance; on rolling NW. slope, 180 ft. above draw.

DEPENDENT RESURVEY OF SUBDIVISION, T. 9 N., R. 4 E.

Chains

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked

$\frac{1}{4}$ S 18
S 19
1940

from which

A Douglas fir, 16 ins. diam., bears S.29°W., 131 links distant, marked $\frac{1}{4}$ S18BT

A Douglas fir, 24 ins. diam., bears N.88°30'W., 173 links distant, marked $\frac{1}{4}$ S18BT

54.00 Ascend abrupt W. slope, entering scattered timber, bears N. and S.

62.30 Trail, bears N.20°W. and S.20°E.

75.00 Top of ascent, on rocky point of spur, 650 ft. above $\frac{1}{4}$ section corner; thence ascend along N. slope; entering medium dense fir and spruce timber.

80.58 The corner of sections 17, 18, 19, and 20.

Land, mountainous; drainage SW.
Soil, rocky, sandy clay loam; 2nd to 3rd rate.
Timber, aspen, Douglas fir, balsam and spruce.
Undergrowth, sagebrush, chokecherry, nine bark, and scattered mahogany; medium growth of weeds and grass.
Excellent grazing land.

N.0°27'W., between sections 17 and 18.

Descend N. slope, over mountainous land, through medium dense timber, and undergrowth.

7.20 Draw, 170 ft. below section corner, course N.75°W.; ascend SW. slope.

22.00 Top of ascent, 130 ft. above draw, slopes W.; descend NW. slope.

28.70 Draw, 180 ft. below top of ascent, course N.80°W.; ascend SW. slope.

35.00 Top of ascent, 100 ft. above draw, slopes W.; descend along W. slope.

40.07 Proportionate distance; on W. slope.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked

$\frac{1}{4}$
S18/S17
1940

from which

A Douglas fir, 8 ins. diam., bears S.52°30'E., 34 links distant, marked $\frac{1}{4}$ S17BT

A Douglas fir, 18 ins. diam., bears S.81°50'W., 50 links distant, marked $\frac{1}{4}$ S18BT

58.00 Descend abrupt NW. slope.

DEPENDENT RESURVEY OF SUBDIVISION, T. 9 N., R. 4 E.

Chains

- 65.00 Draw, 480 ft. below $\frac{1}{4}$ section corner, course N.60°W.; ascend SW. slope.
- 80.14 Proportionate distance; on SW. slope, 160 ft. above draw.
- Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for corner of sections 7, 8, 17, and 18, with brass cap marked

T9N	R4E
S7	S8
S18	S17
1940	

from which

- A Douglas fir, 8 ins. diam., bears N.44°E., 26 links distant, marked T9NR4ES8BT
- A Douglas fir, 8 ins. diam., bears S.55°E., 37 links distant, marked T9NR4ES17BT
- A Douglas fir, 16 ins. diam., bears S.20°W., 5 links distant, marked T9NR4ES18BT
- A Douglas fir, 14 ins. diam., bears N.71°W., 22 links distant, marked T9NR4ES7BT

Land, mountainous; steep W. slopes; drainage W.
 Soil, rocky, sandy clay loam; 2nd to 3rd rate.
 Timber, Douglas fir, balsam, and spruce.
 Undergrowth, sagebrush, nine bark, chokecherry, and mountain laurel; medium growth of weeds and grass.
 Excellent grazing land.

From the corner of sections 8, 9, 16, and 17.

S.88°05'W., between sections 8 and 17.

Ascend along rolling NE. slope, over mountainous land, through scattered timber, and medium dense undergrowth.

- 10.00 Ascend gradual E. slope, over rolling top of ridge, bears N. and S.
- 40.42 Proportionate distance; on gentle E. slope, 100 ft. above section corner.
- Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground, to solid rock, and in a mound of stone to top, for $\frac{1}{4}$ section corner, with brass cap marked

$\frac{1}{4}$	S 8
	S 17
	1940

from which

- An aspen, 6 ins. diam., bears S.6°45'E., 318 links distant, marked $\frac{1}{4}$ S17BT
- A balsam, 18 ins. diam., bears N.64°30'W., 299 links distant, marked $\frac{1}{4}$ S8BT

- 42.00 Ridge, 25 ft. above $\frac{1}{4}$ section corner, bears N. and S.; descend SW. slope; entering fir and spruce timber, and mahogany brush.

DEPENDENT RESERVE OF SUBDIVISION, T. 9 N., R. 4 E.

Chains

- 54.80 Draw, 180 ft. below ridge, course SW; ascend.
- 61.40 Point of spur, 90 ft. above draw, slopes S.; descend abrupt SW. slope;
- 80.85 The corner of sections 7, 8, 17, and 18, 550 ft. below point of spur.

Land, mountainous; rolling on E. half, and abrupt slopes on W. half mile.

Soil, rocky, sandy clay loam; 2nd to 3rd rate.

Timber, aspen, Douglas fir, balsam and spruce.

Undergrowth, sagebrush, nine bark, and chokecherry; mahogany on W. half mile; medium growth of weeds and grass.

Excellent grazing land.

From the corner of sections 7, 12, 13, and 18, on W. boundary of township, heretofore described.

N. 89° 45' E., between sections 7 and 18.

Ascend NW. slope, over mountainous land, through medium dense undergrowth.

- 9.00 Spur, 260 ft. above section corner, slopes N.; descend E. slope; entering medium dense timber.
- 28.50 Draw, 390 ft. below spur, course N.; ascend.
- 38.00 Top of ascent, 30 ft. above draw, slopes N.; descend.
- 40.41 Proportionate distance.

Set an iron post, 3 ft. long, 1 in. diam., 12 ins. in the ground to solid rock, and in mound of stone to top, for $\frac{1}{4}$ section corner, with brass cap marked

$$\frac{S 7}{S 18} \\ 1940$$

from which

A balsam, 12 ins. diam., bears N. 75° 30' E., 46 links distant, marked $\frac{1}{4}$ S7BT

A Douglas fir, 8 ins. diam., bears S. 75° 30' W., 11 links distant, marked $\frac{1}{4}$ S18BT

- 42.00 Draw, 80 ft. below $\frac{1}{4}$ section corner, course N.; ascend.
- 46.80 Top of ascent, 90 ft. above draw, slopes N.; descend.
- 49.00 Draw, 40 ft. below top of ascent, course N. 80° W.; ascend along S. slope on N. side of draw.
- 61.00 Ascend SW. slope, leaving draw.
- 80.62 The corner of sections 7, 8, 17, and 18, 460 ft. above draw.

Land, mountainous; NW. drainage.

Soil, rocky, sandy clay loam; 2nd to 3rd rate.

Timber, aspen, Douglas fir, balsam and spruce on portion of mile.

Undergrowth, sagebrush, nine bark, and chokecherry; medium growth of weeds and grass.

Excellent grazing land.

DEPENDENT RESURVEY OF SUBDIVISION, T. 9 N., R. 4 E.

Chains

N.0°17'W., between sections 7 and 8.

Along steep W. slope, over mountainous land, through medium dense timber and undergrowth.

11.00 Descend NW. slope.

27.00 Draw, 200 ft. below section corner, course N.60°W.; ascend SW. slope.

34.00 Top of ascent, 50 ft. above draw, slopes W.; thence along W. slope.

40.07 Proportionate distance; on W. slope.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{2}$ section corner, with brass cap marked

$\frac{1}{2}$
 S7|S8
 1940

from which

A Douglas fir, 16 ins. diam., bears S.65°E., 54 links distant, marked $\frac{1}{2}$ S8BT

A Douglas fir, 10 ins. diam., bears N.74°W., 25 links distant, marked $\frac{1}{2}$ S7BT

45.60 Draw, 60 ft. below $\frac{1}{2}$ section corner, course W.; ascend SW. slope; entering dense mahogany and scattered timber.

56.00 Top of ascent, 130 ft. above draw, slopes W.; descend NW. slope.

73.30 Draw, 260 ft. below top of ascent, course W.; ascend SW. slope, leaving timber.

80.14 Proportionate distance; on SW. slope, 120 ft. above draw.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, for corner of sections 5, 6, 7, and 8, with brass cap marked

T9N R4E
S6|S5
 S7|S8
 1940

from which

A mahogany, 5 ins. diam., bears N.44°15'E., 22 links distant, marked T9NR4E5BT

Raise a mound of stone, 3 ft. base, 3 ft. high, W. of corner.

Land, mountainous; W. exposure and drainage.
 Soil, rocky, sandy clay loam; 2nd to 3rd rate.
 Timber, Douglas fir, balsam and spruce.
 Undergrowth, sagebrush, chokecherry and mountain laurel;
 medium growth of weeds and grass.
 Excellent grazing land.

From the corner of sections 4, 5, 8, and 9.

S.88°28'W., between sections 5 and 8.

DEPENDENT RESURVEY OF SUBDIVISION, T. 9 N., R. 4 E.

Chains

Ascend along NE. slope, over mountainous land, through medium dense timber and undergrowth.

15.00 Ridge, 110 ft. above section corner, bears NW. and SE.; thence over rolling top of ridge.

25.00 Leave timber, bears N. and S.

40.56 Proportionate distance; on rolling top of ridge.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, for $\frac{1}{4}$ section corner, with brass cap marked

$$\begin{array}{r} \frac{1}{4} \frac{S \ 5}{S \ 8} \\ 1940 \end{array}$$

from which

A balsam, 8 ins. diam., bears S.7°E., 340 links distant, marked $\frac{1}{4}$ SSBT

Raise a mound of stone, 3 ft. base, 3 ft. high, N. of corner.

53.00 Rim of ridge, bears N. and S.; descend W. slope.

60.00 Enter mahogany brush, bears N. and S.

72.00 Small draw, course SW.; descend SW. slope.

81.13 The corner of sections 5, 6, 7, and 8, 640 ft. below ridge.

Land, mountainous; rolling top of ridge on E. portion, and steep slopes on W. portion.

Soil, rocky, sandy clay; 2nd to 3rd rate.

Timber, aspen, and scattered balsam, spruce and Douglas fir on portion of mile.

Undergrowth, sagebrush, nine bark and mountain laurel; mahogany on W. portion of mile; medium growth of weeds and grass.

Excellent grazing land.

From the corner of sections 1, 6, 7, and 12, on W. boundary of township, heretofore described.

N.89°18'E., between sections 6 and 7.

Descend NE. slope, over mountainous land, through medium dense timber, and undergrowth.

3.60 Canyon, 60 ft. below section corner; course N.30°W.; ascend NW. slope.

15.00 Top of ascent, 150 ft. above canyon, slopes N.; descend NE. slope.

21.10 Draw, 70 ft. below top of ascent, course N.30°W.; ascend W. slope.

36.00 Spur, 400 ft. above draw, projects N.; descend E. slope.

39.30 Draw, 30 ft. below spur, course N.; ascend NW. slope.

40.53 Proportionate distance; on NW. slope, 20 ft. above draw.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in

DEPENDENT RESURVEY OF SUBDIVISION, T. 9 N., R. 4 E.

Chains

the ground, for $\frac{1}{4}$ section corner, with brass cap marked

$$\frac{1}{4} \begin{array}{r} S 6 \\ \hline S 7 \\ 1940 \end{array}$$

from which

An aspen, 6 ins. diam., bears S.81°30'E., 206 links distant, marked $\frac{1}{4}$ S7BT

An aspen, 8 ins. diam., bears N.25°W., 101 links distant, marked $\frac{1}{4}$ S6BT

- 55.00 Top of ascent, 140 ft. above $\frac{1}{4}$ section corner, slopes N.30°W.; descend NE. slope.
- 61.40 Draw, 90 ft. below top of ascent, course N.30°W.; ascend SW. slope, leaving timber, and entering mahogany brush.
- 81.02 The corner of sections 5, 6, 7, and 8, 610 ft. above draw.

Land, mountainous; drainage NW.
Soil, rocky, sandy clay loam; 2nd to 3rd rate.
Timber, dense aspen and scattered balsam, Douglas fir and spruce on portion of mile.
Undergrowth, sagebrush, nine bark and chokecherry; mahogany on portion of E. half mile; medium growth of weeds and grass.
Excellent grazing land.

N.0°10'E., between sections 5 and 6.

Ascend abrupt SW. slope, over mountainous land, through medium dense undergrowth.

- 7.00 Top of abrupt ascent, 120 ft. above section corner, slopes W.; thence along W. slope; entering scattered timber.
- 19.00 Descend NW. slope.
- 23.00 Draw, 70 ft. below top of ascent, course W.; ascend SW. slope.
- 32.00 Top of ascent, 100 ft. above draw, slopes W.; descend NW. slope.
- 40.07 Proportionate distance; on NW. slope, 60 ft. below top of ascent.

Set an iron post, 3 ft. long, 1 in. diam., 16 ins. in the ground to solid rock, and in mound of stone to top, for $\frac{1}{4}$ section corner, with brass cap marked

$$\frac{1}{4} \begin{array}{r} S 6 | S 5 \\ \hline 1940 \end{array}$$

from which

A balsam, 10 ins. diam., bears N.36°30'E., 212 links distant, marked $\frac{1}{4}$ S5BT

A balsam, 10 ins. diam., bears N.9°15'W., 288 links distant, marked $\frac{1}{4}$ S6BT

- 44.30 Draw, 180 ft. below $\frac{1}{4}$ section corner, course W.; ascend SW. slope.

DEPENDENT RESURVEY OF SUBDIVISION, T. 9 N., R. 4 E.

Chains	
54.00	Top of ascent, 160 ft. above draw, slopes W.; descend along W. slope.
78.00	Descend abrupt N. slope.
80.26	The corner of sections 5, 6, 31, and 32, on N. boundary of township, heretofore described, 420 ft. below top of ascent.

Land, mountainous; W. exposure and drainage.
 Soil, rocky, sandy clay loam; 2nd to 3rd rate.
 Timber, scattered balsam, Douglas fir and spruce.
 Undergrowth, mahogany, sagebrush, and chokecherry;
 medium growth of weeds and grass.
 Good grazing land.

GENERAL DESCRIPTION

T. 9 N., R. 4 E., is located within the Cache National Forest, and is mountainous in character. A ridge, dividing the drainage of the Bear River to the east, and Blacksmith Fork to the northwest, extends northerly through sections 33, 34, 27, 22, 15, 14, 11, 12, 2 and 1. This ridge has a wide, rolling top, varying in elevation above sea level, from about 8500 feet to 9000 feet. The slopes to the east of the ridge are abrupt, breaking off to a rolling bench along the east boundary, and the drainage, formed by small draws, is easterly. The slopes to the west of the ridge are rolling, except the NE. corner of the township, where the slopes become abrupt. The drainage to the west of the ridge is northerly and northwesterly formed by tributaries of Blacksmith Fork. A ridge with a wide rolling top, about 8500 feet in elevation, extends northwesterly and northerly through sections 27, 28, 21, 20, 17, 8, and into section 5. The slopes to the south and southwest of this ridge, in southwest corner of the township are abrupt and broken by ledges, and to the west of the ridge in the northwest corner of the township, the slopes are abrupt, breaking off to rolling hills. The slopes through the central portion are rolling. Blacksmith Fork heads in section 11, and drains northwest and westerly through sections 2, 3, and 4. The slopes of the canyon of Blacksmith Fork are very abrupt and through sections 4, 5, and 6, broken by ledges.

The soil throughout the township consists of a sandy clay loam, rich in humus, and is rocky on the slopes, varying from 2nd to 3rd rate. The soil supports from a medium to dense growth of weeds, grass, and bushes, affording excellent feed for stock.

No part of the township is suitable for cultivation, the surface being out by draws and canyons, with rolling to abrupt slopes, but is adapted and extensively used during the summer months for grazing of sheep and cattle.

The only water found in the township is in small springs located in sections 3, 6, 11, 12, 18, 21, 27, 29, and 33. There are troughs at most of the springs for watering of the stock grazed on the township.

Timber in commercial quantities of spruce, Douglas fir, balsam and aspen is found throughout the township. extends

A graded road from Woodruff, Utah, to Huntsville, Utah, through sections 33, 34, 35, 36, and 25. Also, there are old roads and trails through the township, making all parts available to stock.

No indications of valuable minerals, oil, oil shale, or coal were found.

The mean magnetic declination was found to be 17°30'E.

4-680
(Revised May 1934)

FIELD ASSISTANTS

NAMES	CAPACITY
Joe Atkin	Principal Assistant
Merlin W. Brough	Principal Assistant
Eugene Kirkpatrick	Chairman
Alan W. Layton	Chairman
Harold L. Clark	Chairman
Donald Carlisle	Flagman
Charles Spence	Flagman
Richard Bentley	Cornerman
Robert L. Johnson	Cornerman
Manelous August	Cornerman
Orville Ramsey	Cornerman
John A. Gorder	Axeman
Phillip A. Kinze	Axeman
Stanley E. Greene	Axeman
Lynn Simmons	Axeman
Richard Y. Dorton	Axeman
Richard Skuppin	Axeman
Spiro Nicholas	Axeman

CERTIFICATE OF ~~UNITED STATES~~ SURVEYOR

256

We, Ralph Gentry, Cadastral Engineer, and
I, Alwyn C. Alberga, Public Land Surveyor, HEREBY CERTIFY upon honor the

pursuance of special instructions bearing date of the 14th day of October

received from the district cadastral engineer for Utah, with assignm

instructions dated June 1, 1940, we have ~~surveyed~~ dependently resurveyed t

north and west boundaries, and subdivisional lines of T. 9 N., R. 4

of the Salt Lake Meridian, in the State of Utah, which

represented in the foregoing field notes as having been executed by ^{us} ~~his~~ and under ^{our} ~~my~~ direction; and that

survey has been made in strict conformity with said instructions, the Manual of Instructions for the Sur

of the Public Lands of the United States, and in the specific manner described in the foregoing field notes

Salt Lake City, Utah

Jan. 23, 1941

Ralph Gentry
Cadastral Engineer

Alwyn C. Alberga
Public Land Surveyor

CERTIFICATE OF APPROVAL

OFFICE OF ~~U.S.~~ SUPERVISOR OF SURVEYS,

Denver, Colo., May 16, 19

The foregoing field notes of the ~~survey of~~ dependent resurvey of the north and
west boundaries, and subdivisional lines of T. 9 N., R. 4 E.,

executed by Ralph Gentry, Cadastral Engineer, and Alwyn C. Alberga, Public
Land Surveyor,

under special instructions dated October 14, 1939, and assignm

instructions dated June 1, 1940, having been critically examined, and

the necessary corrections made prior to their certification by the engineer, the said field notes, and the surve
therein described, are hereby approved.


U.S. Supervisor of Surveys.

CERTIFICATE OF TRANSCRIPT

~~I CERTIFY that the foregoing transcript of the field notes of the above-described surveys in
is a true copy of the original field notes on file in the public survey office.~~

~~U.S. Supervisor of Surveys.~~

UNITED STATES
DEPARTMENT OF THE INTERIOR
GENERAL LAND OFFICE

FIELD NOTES

DEPENDENT RESURVEY OF

PORTION OF SUBDIVISION OF

T. 10 N., R. 2 E.,

Of the Salt Lake Meridian,

In the State of Utah

EXECUTED BY

Ralph Gentry, Cadastral Engineer

Under special instructions dated July 14, 1941, which provided for the surveys included under Group No. 325, bearing the approval of the Commissioner of the General Land Office under date of August 20, 1941 and assignment instructions dated August 31, 1942

Survey commenced September 1, 1942

Survey completed September 2, 1942

INDEX DIAGRAM.

Township 10 North, Range 2 East

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

154

005 259

DEPENDENT RESURVEY OF PORTION OF
SUBDIVISION OF T. 10 N., R. 2 E., SALT LAKE MERIDIAN

The official survey of T. 10 N., R. 2 E., Salt Lake Meridian, is shown upon the township plat approved October 19, 1894. The following field notes are those of a dependant resurvey or reestablishment of portion of the subdivisonal lines of T. 10 N., R. 2 E.

Survey commenced September 1, 1942, and executed with W. & L. E. Gurley solar transit No. 371614. The instrument is constructed in accordance with the specifications of the General Land Office, and is equipped with a Smith solar attachment and full vertical circle; the horizontal limb is provided with two double verniers placed opposite to each other, and read to single minutes of arc, which is also the least count of the verniers of the vertical circle, and of the latitude and declination arcs. The instrument was approved for use on this survey by the District Cadastral Engineer for Utah, conditional upon satisfactory field tests. The instrument was in good adjustment throughout this survey.

The direction of the lines were determined by angles deflected from meridians established by observations on Polaris.

The measurements were made with a Lallie steel tape, 5 chains in length, graduated every link for the first 100 links, and thereafter at intervals of 10 links. The tape was tested by comparison with a Lufkin standard steel tape 1 chain long, and found correct. The measurements were made on the slope, and the vertical angle of each interval was ascertained by clinometers; the horizontal equivalents are entered in the field note record.

The approximate geographic position of the SE. cor. of the township, as determined from U. S. Geological topographic sheet, "Utah Logan Quadrangle", is as follows: - latitude, $41^{\circ} 33' N.$, longitude $111^{\circ} 40' W.$

Reestablishment of surveys executed by John Thomas Breckon, U. S. Deputy Surveyor, in 1894.

September 1, 1942, at the cor. of secs. 3, 4, 9 and 10, T. 10 N., R. 2 E., approximate latitude $41^{\circ} 37' N.$, longitude $111^{\circ} 43' W.$, at 1h 28m p.m., by my watch which carries correct 105th meridian time, as determined by radio signals, or 1h 01.1m p.m., l. m. t., I make an hour angle observation upon Polaris, west of the meridian, two each with the telescope in direct and reversed positions, reading the horizontal deflection angle from well defined reference point about a mile to the north, west to Polaris.

Mean deflection angle,	$0^{\circ} 40'$
Azimuth of Polaris,	$0^{\circ} 41'$
True bearing of flag.	$N. 0^{\circ} 01' W.$

At point for sec. cor., located from a decayed stump of tree, identified to me on the ground, as the original pine stump marked for bearing object to the sec. cor. by Joe E. Peterson, Hyrum, Utah, claimant of the land to the NE. Mr. Peterson stated to me that he had seen the scribe marks on the stump of the tree about 1930, when he constructed a barbed wire fence to the S., and E. from the position for the sec. cor. No evidence of the cor. monument could be found.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in

2

DEPENDENT RESURVEY OF PORTION OF
SUBDIVISION OF T. 10 N., R. 2 E.

Chains

the ground, for cor. of secs. 3, 4, 9, and 10, with brass cap marked

T10N	R2E
S 4	S 3
S 9	S 10

1942

from which

Decayed stump of pine tree, identified by Joe E. Peterson, as original marked tree stump, bears N. 3° E., 18 lks.

New trees marked as follows:-

A maple, 7 ins. diam., bears N. 25° 30' E., 80 lks. dist., marked T10NR2ES3BT.

A Douglas fir, 4 ins. diam., bears S. 40° 30' E., 38 lks. dist., marked T10NR2ES10BT.

A Douglas fir, 7 ins. diam., bears S. 79° 30' W., 74 lks. dist., marked T10NR2ES9BT.

A Douglas fir, 8 ins. diam., bears N. 24° 45' W., 43 lks. dist., marked T10NR2ES4BT.

Cor. stands in bottom of canyon, course N. 15° W., and at cor. of barbed wire fence, bearing E., and S.

Thence

N. 89° 49' W., between secs. 4 and 9.

Ascend steep E. slope, over mountainous land, through dense undergrowth and scattered timber.

0.15 Old road, along canyon, bears N. 15° W., and S. 15° E.

8.00 Point of spur, 300 ft. above sec. cor., projects N.; descend W. slope.

28.00 Enter Blacksmith Fork canyon, bears NE. and SW.

33.00 Blacksmith Fork river, stream of clear water, 80 lks. wide, in canyon, 450 ft. below spur, course S. 70° W.; ascend.

36.00 Graded road, bears N. 70° E., and S. 70° W.

38.26 Proportionate dist., on N. side of road. No evidence of $\frac{1}{4}$ sec. cor. found.

Set an iron post, 3 ft. long, 1 in. diam., 27 ins. in the ground, and in mound of stone to top, for $\frac{1}{4}$ sec. cor., with brass cap marked

$\frac{1}{4}$	S 4
S 9	

1942

from which

A maple, 7 ins. diam., bears S. 69° 45' E., 81 lks. dist., marked S9BT.

Ascend SE. slope.

DEPENDENT RESERVE OF PORTION OF
SUBDIVISION OF T. 10 N., R. 2 E.

Chains

- 56.50 Rocky point of spur, 460 ft. above $\frac{1}{4}$ sec. cor., slopes S.; descend SW. slope.
- 61.00 Draw, 70 ft. below spur, course S.; ascend SE. slope.
- 66.00 Rocky point of spur, 120 ft. above draw, slopes S.; descend SW. slope.
- 74.00 Draw, 60 ft. below spur, course S.; ascend SE. slope.
- 76.52 On steep rocky SE. slope, 140 ft. above draw.

The cor. of secs. 4, 5, 8, and 9, which is a limestone, 17x5x4 ins., set in mound of stone, and marked 5 notches on S., and 4 notches on E. edge.

At point for cor.

Set an iron post, 3 ft. long, 2 ins. diam., 27 ins. in the ground, with original cor. monument deposited at base, for cor. of secs. 4, 5, 8, and 9, with brass cap marked

T10N	R2E
S 5	S 4
S 8	S 9

1942

raise a mound
of stone, $3\frac{1}{2}$ ft. base, 3 ft. high W. of cor.

Land, mountainous; steep rocky slopes.
Soil, coarse sandy and rocky loam; 3rd to 4th rate.
Timber, scattered juniper; scattered Douglas fir on E. portion of mile.
Undergrowth, oak, sagebrush, service, and chokecherry.
Medium growth of grass and weeds. Good grazing land.

General Description

The portion of the township resurveyed is rough and mountainous in character with drainage generally to the west through the Blacksmith Fork River.

The area is covered with a moderate to scattered stand of timber, consisting principally of Douglas fir and juniper. Undergrowth consists of scrub oak, sagebrush, service berry, chokeberry, grass and weeds. It affords good grazing to livestock.

The area is included in the Cache National Forest and this resurvey was made at the request of the Forest Service.

CERTIFICATE OF SURVEYOR

I, Ralph Gentry, Cadastral Engineer, HEREBY CERTIFY upon honor the
pursuance of special instructions bearing date of the 14th day of July,
received from the district cadastral engineer for Utah, with assign
instructions dated August 31, 1942, I have ~~surveyed~~ independently resurveyed
portion of subdivisional lines of T. 10 N., R. 2 E.,
of the Salt Lake Meridian, in the State of Utah, which
represented in the foregoing field notes as having been executed by me and under my direction; and that
survey has been made in strict conformity with said instructions, the Manual of Instructions for the Sur
of the Public Lands of the United States, and in the specific manner described in the foregoing field note
Salt Lake City, Utah,
January 14, 1943

Ralph Gentry

Cadastral Engineer

CERTIFICATE OF APPROVAL

Bureau of Land Management
~~OFFICE OF THE DISTRICT ENGINEER OF SURVEYS~~

Washington, D. C. SEP 9 1955 19.

The foregoing field notes of the ~~survey of~~ independent resurvey of portion of the
subdivision of T. 10 N., R. 2 E.,
executed by Ralph Gentry, Cadastral Engineer
under special instructions dated July 14, 1941, and assignm
instructions dated August 31, 1942, having been critically examined, a
the necessary corrections made prior to their certification by the engineer, the said field notes, and the surv
therein described, are hereby approved.

Earl G. Harrington
Supervisor of Surveys
Cadastral Engineering Staff

CERTIFICATE OF TRANSCRIPT

~~I certify that the foregoing transcript of the field notes of the above described surveys in T. 10~~
is a true copy of the original field notes on file in the public survey office.

Supervisor of Surveys.

INDEX DIAGRAM.

Township 10 North, *Range* 5 East

		15	14	12	11	10	9						
26	98	6	99	5	79	4	68	3	61	2	37	1	7
		97		96		78		66		50		36	
24	98	7	95	8	77	9	65	10	48	11	35	12	6
		94		93		76	64	47		46		34	
23	95	18	92	17	75	16	63	15	44	14	33	13	5
		91		89		73		57		44		32	
22	91	19	88	20	72	21	56	22	42	23	31	24	4
		87		86		71	55	54		41		30	
21	87	30	85	29	69	28	53	27	40	26	29	25	3
		84		83		60		52		39		28	
20		31	81	22	58	23	50	24	38	25	27	26	1
			81										

6-161

Subdivision of sections Pages 100 to 103
 Tract 37, Page 103.
 Tract 38, Page 105.
 Tract 39, Page 107.
 Tract 40, Page 110.
 Tract 41, Page 112.
 Confirmation of private claims, Pages 116 to 119.

T. 10 N., R. 5 E.

The resurvey of T. 10 N., R. 5 E., Salt Lake Meridian, Utah, was executed by Elliot Bird, Cadastral Engineer, with Buff and Buff transit No. 18003. The instrument is the property of the General Land Office, and is equipped with a Smith solar attachment and has a full vertical circle. The horizontal limb is provided with two double verniers placed opposite to each other and reading to single minutes of arc, which is also the least count of the verniers of the latitude and declination arcs, and verticle circle. The instrument was approved for use on this survey, conditional upon satisfactory field tests, by the district cadastral engineer for Utah, in assignment instructions dated June 25, 1938.

The solar attachment was not used on this resurvey and all controlling meridians, were established by hour angle observations made upon Polaris, some of which are shown in this record. The bearings of the lines were deflected from these true meridians by the repetition of angles, and carried forward by transit line, taking the mean of direct and reversed sights.

The measurements are made with a Lallie steel tape 5 chains in length, graduated every link for the first 100 links and thereafter at intervals of 10 links. The tape was tested, comparison being made with a Lufkin standard steel tape 1 chain in length and found correct. The measurements are made on the slope, the vertical angle of each interval ascertained with clinometers in good adjustment, and the slope measurements properly reduced to true horizontal distances which appear in this record.

The resurvey of T. 10 N., R. 5 E., consists of a dependent resurvey of the north, east, and west boundaries, establishment of corners for T. 10 N., R. 5 E. along the west three miles of the south boundary, dependent resurvey of that portion of the subdivision surveyed by T.C. Bailey and J.G. Burrill, U.S. Deputy Surveyors, in 1875, independent resurvey of that portion of the subdivision surveyed by J.H. Martineau, U.S. Deputy Surveyor, in 1878, and metes and bounds survey of conflicting private claims.

The dependent resurvey is a complete restoration of the boundaries and subdivisional lines in their true original positions as adjusted to the identified evidence found. Before reconstructing or restoring the missing corners, the lines of the original survey were retraced and search was made for the original corners or their accessories. The rules of proportionate measurement were applied in order to ascertain the position of each lost corner.

In order to simplify this record, the true line notes only are given.

DEPENDENT RESURVEY EAST BOUNDARY, T. 10 N., R. 5 E.

Reestablishment of surveys executed by
T.C. Bailey and J.G. Burrill, U.S. Deputy
Surveyors, in 1875.

The witness cor. to the cor. of Ts. 9 and 10 N., Rs. 5 and 6 E., is an iron post, 3 ins. in diam., set, marked and witnessed, as described in the official record of the resurvey of T. 9 N., R. 5 E., Group 33, Utah, and is reported as being N. $0^{\circ}30'$ W., 1.85 chs. dist. from the true point for said cor. I efface the marks "WC" on the brass cap of the cor. monument and at a point, S. $0^{\circ}30'$ E., 1.85 chs. dist. from its present position, I reset the iron post, 10 ins. in the ground to solid rock and in a large mound of stone to top, for the cor. of Ts. 9 and 10 N., Rs. 5 and 6 E.

DEPENDENT RESURVEY EAST BOUNDARY, T. 10 N., R. 5 E.

Chains

July 1, 1938: Stationed at the cor. of Ts. 9 and 10 N., Rs. 5 and 6 E., in approximate latitude $41^{\circ}33'$ N., longitude $111^{\circ}19'$ W., at 11h 10.6m a.m. by my watch which carried correct 105th meridian standard time, I make an hour angle observation on Polaris west of the meridian, making four observations, two each with the telescope in direct and reversed positions, reading the horizontal deflection angle from a point on a ledge about 1 mile e in a counter clockwise direction to the star.

Local mean time of observation.....10h 45.3m a
 Mean horizontal deflection angle..... $91^{\circ}08'30''$
 Azimuth of Polaris..... $1^{\circ}08'30''$
 True bearing to point on ledge..... East.

I deflect an angle of $90^{\circ}37'$ in a counter clockwise direction from the reference point, thence from the above cor.

N. $0^{\circ}37'$ W., bet. secs. 31 and 36.

Ascend abrupt S. slope of broken mountainous land, through dense short undergrowth.

- 5.50 Rolling top of spur, 110 ft. above cor., slopes S. 80° E. descend gradually over rolling NE. slope.
- 16.90 Shallow draw, 40 ft. below spur, drains S. 80° E.; ascend gradual SW. slope.
- 29.00 Ridge, 60 ft. above draw, bears S. 75° E. and N. 75° W.; descend gradual N. slope.
- 39.83 The $\frac{1}{4}$ sec. cor. secs. 31 and 36, a sandstone, 10 x 10 x 5 ins., above ground, firmly set, marked $\frac{1}{4}$ on W. face. Cor. has no accessories.

At the cor. point, on gradual N. slope, 100 ft. below ridge

Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, with the original cor. monument deposited at base of the post, for $\frac{1}{4}$ sec. cor. secs. 31 and 36, with brass cap marked

$\frac{1}{4}$
 S36 | S31

1938

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor. Thence, N. $0^{\circ}17'$ W.

- 13.20 Small stream of good water, 2 lks. wide, 1 in. deep, in bottom of hollow, 140 ft. below the $\frac{1}{4}$ sec. cor., flows E.; ascend abrupt S. slope.
- 1^o.50 Ascent becomes gradual, bears E. and W.
- 39.74 The cor. of secs. 25, 30, 31, and 36, a sandstone, 12 x 12 x 3 ins. above ground, loosely set, marked 1 groove on S. face and 5 grooves on N. face. Cor. has no accessories.
- At the cor. point, on rolling top of Thousand Dollar Ridge, 230 ft. above hollow, bears S. $77^{\circ}30'$ W. and N. $77^{\circ}30'$ E.

Set an iron post, 3 ft. long, 2 ins. in diam., 30 ins. in the ground, with the original cor. monument deposited at the base of the post, for cor. of secs. 25, 30, 31, and

DEPENDENT RESURVEY EAST BOUNDARY, T. 10 N., R. 5 E.

Chains

36, with brass cap marked

T10N	
R5E	R6E
S25	S30
S36 S31	

1938

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Land, rolling and mountainous, with a general easterly exposure and drainage.

Soil, shallow gravel with a rocky surface; 4th rate. Undergrowth, sage and service berry brush, grass, and weeds. No timber. Good grazing land.

N. 0°02' E., bet. secs. 25 and 30.

Descend gradually over general NW. slope of Thousand Dollar Ridge, through dense short undergrowth.

- 2.80 Old road, bears N. 50° E. and S. 50° W.
- 9.80 Unimproved road, bears NE. to Randolph, Utah, and SW. along top of Thousand Dollar Ridge.
- 38.40 Slope changes from a gradual NW. slope to an abrupt N. slope.
- 40.35 The 1/4 sec. cor. secs. 25 and 30, a sandstone, 18 x 10 x 4 ins. above ground, firmly set, marked 1/4 on W. face. Cor. has no accessories.

At the cor. point, on steep N. slope, 150 ft. below sec. cor.

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, with the original cor. monument deposited at the base of the post, for the 1/4 sec. cor. secs. 25 and 30, with brass cap marked

1/4	
S25	S30
1938	

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Thence, N. 1°25' E.

- 2.00 Descent becomes gradual, bears NE. and SW.
- 12.60 Descent becomes abrupt, bears E. and W.
- 21.60 Traveled unimproved road along South Fork Big Creek, bears E. and W.
- 28.60 The South Fork Big Creek, stream of good clear water, 15 lks. wide, 10 ins. deep, in bottom of wide canyon, 260 ft. below the 1/4 sec. cor., flows E.; ascend steep S. slope.
- 36.80 Spur, 190 ft. above creek, slopes E., about 10.00 chs. dist. to end; descend steep N. slope.

DEPENDENT RESURVEY EAST BOUNDARY; T. 10 N., R. 5 E.

Chains

39.78 The cor. of secs. 19, 24, 25, and 30, a sandstone, 25 x 12 x 6 ins., firmly set, marked 2 notches on S. edge and 4 notches on N. edge. Cor. is witnessed by a small mound of stone to the W. of the cor. monument.

At the cor. point, on steep N. slope, 70 ft. below spur.

Set an iron post, 3 ft. long, 2 ins. in diam., 12 ins. in the ground to solid rock and in a large mound of stone, with the original cor. monument deposited at the base of the post, for cor. of secs. 19, 24, 25, and 30, with brass cap marked

T10N	
R5E	R6E
S24	S19
S25	S30

1938

Land, rolling and mountainous, with a general easterly exposure and drainage.

Soil, shallow gravel with a rocky surface; 4th rate.

No timber.

Undergrowth, sage, service berry, and deer brush, grass and weeds.

Good grazing land.

N. 0°51' W., bet. secs. 19 and 24.

Descend steep N. slope of rolling mountainous land, through dense short undergrowth.

2.60 Draw, 40 ft. below cor., drains S. 60° E.; ascend gradual S. slope.

22.30 Ascent becomes more gradual, bears E. and W.

39.85 The $\frac{1}{4}$ sec. cor. secs. 19 and 24, a sandstone, 14 x 8 x 4 ins., firmly set, marked $\frac{1}{4}$ on W. face. Cor. is witnessed by a small mound of stone around the cor. monument.

At the cor. point, on top of ridge, 270 ft. above draw, bears E. and W.

Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, with the original cor. monument deposited at the base of the post, for $\frac{1}{4}$ sec. cor. secs. 19 and 24, with brass cap marked

S24	S19
-----	-----

1938

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Thence, N. 0°13' E.

Descend gradual N. slope of ridge.

C.20 Unimproved road, bears E. and W. along top of ridge,

24.00 Descent becomes abrupt, bears E. and W.

DEPENDENT RESURVEY EAST BOUNDARY, T. 10 N., R. 5 E.

Chains
35.70

Small stream of good clear water, 3 lks. wide, 5 ins. deep, in bottom Center Fork Big Creek, 420 ft. below ridge, flows E.; ascend gradual S. slope.

36.70

Unimproved road, bears E. and W., along N. side of stream.

40.03

The cor. of secs. 13, 18, 19, and 24, a sandstone, 24 x 12 x 8 ins., firmly set, marked 3 grooves on N. and S. faces. Cor. has no accessories.

At the cor. point, on gradual S. slope, 40 ft. above stream.

Set an iron post, 3 ft. long, 2 ins. in diam., 30 ins. in the ground, with the original cor. monument deposited at the base of the post, for cor. of secs. 13, 18, 19, and 24, with brass cap marked

T10N	
R5E	R6E
S13	S19
S24	S19

1938

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Land, rolling and mountainous, with a general easterly exposure and drainage.

Soil, shallow gravel with a rocky surface; 4th rate. No timber.

Undergrowth, sage, service berry, mahogany, and bitter brush, grass and weeds.

Good grazing land.

N. 0°18' E., bet. secs. 13 and 18.

Ascend gradual S. slope of rolling mountainous land, through dense short undergrowth.

16.30

Unimproved road on top of ridge, 110 ft. above cor., bears N. 20° W. and S. 80° E.; descend gradual NE. slope.

19.30

Descent becomes abrupt, bears N. 75° W. and S. 75° E.

33.10

The North Fork Big Creek, stream of good clear water, 13 lks. wide, 12 ins. deep, in bottom of wide canyon, 140 ft. below ridge, flows SE.; ascend gradual SW. slope.

35.50

Unimproved road, bears NW. and SE. along the NE. side of creek.

39.86

The 4 sec. cor. secs. 13 and 18, a sandstone, 14 x 12 x 6 ins., firmly set, marked 4 on W. face. Cor. has no accessories.

At the cor. point, on gradual SW. slope, 90 ft. above creek.

Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, with the original cor. monument deposited at the base of the post, for 4 sec. cor. secs. 13 and 18, with brass cap marked.

1/4

S13	S18
-----	-----

1938

DEPENDENT RESURVEY EAST BOUNDARY, T. 10 N., R. 5 E.

Chains

- Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.
- Thence, N. 1°12' W.
- 2.20 Spur, 20 ft. above cor., projects W.; descend gradual NW slope.
- 18.50 Draw, 10 ft. below spur, drains SW.; ascend gradual SE. slope.
- 29.40 Slope changes from a gradual SE. slope to a gradual S. slope.
- 40.50 The cor. of secs. 7, 12, 13, and 18, a sandstone, 24 x 1 x 8 ins., firmly set, marked 4 notches on S. edge and 2 notches on N. edge. Cor. has no accessories.
- At the cor. point, on gradual S. slope, 130 ft. above dr
- Set an iron post, 3 ft. long, 2 ins. in diam., 30 ins. i the ground, with the original cor. monument deposited at the base of the post, for cor. of secs. 7, 12, 13, and 1 with brass cap marked

T10N	
R5E	R6E
S12	S7
S13	S18

1938

- Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor
- Land, rolling and mountainous, with a general easterly and southwesterly exposure and drainage.
- Soil, shallow clay and sand mixed with rock; 4th rate.
- No timber.
- Undergrowth, sage, service berry, mahogany, and deer brush weeds, and grass.
- Good grazing land.

N. 0°09' E., bet. secs. 7 and 12.

- Ascend gradual S. slope of rolling mountainous land, through dense short undergrowth.
- 7.00 Spur, 70 ft. above cor., projects W.; descend gradually over rolling N. slope.
- 14.80 Draw, 50 ft. below spur, drains W., and heads E., about 10.00 chs. dist.; ascend gradual S. slope.
- 17.90 Spur, 30 ft. above draw, projects W., about 7.00 chs. dist. to end; descend gradual N. slope.
- 24.60 Draw, 40 ft. below spur, drains SW. from N. 75° E.; ascend gradual SE. slope.
- 31.00 Spur, 40 ft. above draw, projects W., about 10.00 chs. dist. to end; descend gradual N. slope.
- 40.31 The $\frac{1}{4}$ sec. cor. secs. 7 and 12, a sandstone, 14 x 6 x 5 in loosely set, marked $\frac{1}{4}$ on W. face. Cor. has no accessories.
- At the cor. point, on gradual N. slope, 20 ft. below spur.
- Set an iron post, 3 ft. long, 1 in. in diam., 15 ins. in the ground to solid rock and in a large mound of stone,

DEPENDENT RESURVEY EAST BOUNDARY, T. 10 N., R. 5 E.

Chains with the original cor. monument deposited at the base of the post, for $\frac{1}{4}$ sec. cor. secs. 7 and 12, with brass cap marked

$\frac{1}{4}$
S12 | S7
1938

Thence, N. 0°17' W.

- 9.30 Small draw, 50 ft. below the $\frac{1}{4}$ sec. cor., drains SW. from the E.; ascend gradual SE. slope.
- 12.30 Spur, 20 ft. above draw, projects W., 1.50 chs. dist. to end; descend gradual NW. slope.
- 14.20 Draw, 10 ft. below spur, drains SW.; ascend gradual SE. slope.
- 14.40 Unimproved road, bears SW. and NE.
- 31.70 Recross bottom of draw, drains S. 60° E.
- 40.59 The cor. of secs. 1, 6, 7, and 12, a sandstone, 20 x 6 x 4 ins., firmly set, marked 5 notches on S. edge and 1 notch on N. edge. Cor. has no accessories.

At the cor. point, on rolling SE. slope, 60 ft. above road.

Set an iron post, 3 ft. long, 2 ins. in diam., 30 ins. in the ground, with the original cor. monument deposited at the base of the post, for cor. of secs. 1, 6, 7, and 12, with brass cap marked

T10N
R5E | R6E
S1 | S6

S12 | S7
1938

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Land, rolling and mountainous, with a general southwesterly exposure and drainage.
Soil, shallow sand and clay; with rock; 4th rate.
No timber.
Undergrowth, sagebrush, grass, and weeds.
Good grazing land.

N. 0°27' W., bet. secs. 1 and 6.

Ascend gradual SE. slope of rolling mountainous land, through dense short undergrowth.

- 2.60 Unimproved road, bears S. 5° E. and N. 5° W.
- 9.60 Recross road, bears N. 7° E. and S. 7° W.
- 10.00 Top of divide ridge bet. Dry Canyon and North Fork Big Creek; 40 ft. above cor., bears S. 80° W. and E.; descend gradual N. slope.
- 26.70 Bottom of Dry Canyon, 110 ft. below top of divide ridge, drains E. Road in bottom of canyon, bears E. and W.; ascend gradual S. slope.

DEPENDENT RESURVEY EAST BOUNDARY, T. 10 N., R. 5 E.

Chains

28.20 Spur, 40 ft. above bottom of canyon, projects E., 3.00 chs. dist. to end; descend gradual N. slope.

30.60 Small draw, 20 ft. below spur, drains E.; ascend gradual S. slope.

40.32 The 1/4 sec. cor. secs. 1 and 6, a sandstone, 12 x 10 x 5 ins., firmly set, marked 1/4 on W. face. Cor. has no accessories.

At the cor. point, on gradual S. slope, 40 ft. above draw

Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, with the original cor. monument deposited at the base of the post, for 1/4 sec. cor. secs. 1 and 6, with brass cap marked.

1/4
S1 | S6
1938

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor. Thence, N. 1°23' W.

9.80 Slope changes from a gradual S. slope to an abrupt SE. slope.

17.00 Top of divide ridge bet. Dry Canyon and Old Canyon, 300 ft. above the 1/4 sec. cor., bears NE. and S. 70° W.; descend abrupt N. slope.

35.50 Bottom of Old Canyon, 320 ft. below top of divide ridge, drains S. 85° E.; ascend abrupt S. slope.

36.50 Graded Forest Service road, bears N. 80° W. and S. 80° E.

41.07 The cor. of Ts. 10 and 11 N., Rs. 5 and 6 E., a sandstone, 18 x 10 x 4 ins., firmly set in the ground and mound of stone, marked 6 notches on all four edges. Cor. has no accessories.

At the cor. point, on abrupt S. slope, 60 ft. above bottom of Old Canyon.

Set an iron post, 3 ft. long, 3 ins. in diam., 30 ins. in the ground, with the original cor. monument deposited at the base of the post, for cor. of Ts. 10 and 11 N., Rs. 5 and 6 E., with brass cap marked

T11N
R5E | R6E
S36 | S31
S1 | S6
T10N

1938

Raise a mound of stone, 5 ft. base, 4 ft. high, S. of cor.

Land, rolling and mountainous, with a general southerly and northerly exposure and drainage. Soil, shallow gravel with a rocky surface; 4th rate. No timber.

Undergrowth, sage, oak, service berry, mahogany, and bitter brush, grass and weeds. Good grazing land.

DEPENDENT RESURVEY NORTH BOUNDARY, T. 10 N., R. 5 E.

Chains

Reestablishment of surveys executed by
T.C. Bailey and J.G. Burrill, U.S.
Deputy Surveyors, in 1875.

From the cor. of Ts. 10 and 11 N., Rs. 5 and 6 E.

S. 89°35' W., bet. secs. 1 and 36.

Ascend along S. slope of rolling mountainous land, through
dense short undergrowth. Line follows along N. side of
bottom of Old Canyon.

15.10 Graded Forest Service road in bottom of Old Canyon, bears
N. 80° W. and S. 80° E.; canyon drains S. 80° E. from the
W.; thence along bottom of canyon along S. side of road.

29.60 Recross road, bears N. 80° E. and S. 80° W.; thence along
N. side of road.

39.15 Proportionate distance; find no trace of the $\frac{1}{4}$ sec. cor.

On N. side of bottom of Old Canyon, at a point 30 lks. N.
of center of road.

Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the
ground, for restored $\frac{1}{4}$ sec. cor., secs. 1 and 36, with
brass cap marked

S36
$\frac{1}{4}$
S1

1938

Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.

Continue along bottom of canyon.

76.00 Recross road, bears N. 88° W. and S. 88° E.

78.30 The cor. of secs. 1, 2, 35, and 36, a sandstone, 16 x 8 x
4 ins., firmly set, marked 5 notches on W. edge and 1
notch on E. edge. Cor. is witnessed by a small mound of
stone to the W. of the cor. monument.

At the cor. point, in bottom of Old Canyon, drains E., 50
ft. above the township cor.

Set an iron post, 3 ft. long, 2 ins. in diam., 30 ins. in
the ground, with the original cor. monument deposited at
the base of the post, for cor. of secs. 1, 2, 35, and 36,
with brass cap marked

T11N, R5E
S35 S36
S2 S1
TLON

1938

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Land, rolling and mountainous, with a general easterly
exposure and drainage.

Soil, sand and gravel, with a rocky surface; 4th rate.
No timber.

Undergrowth, sagebrush, grass, and weeds.

Good grazing land.

DEPENDENT RESURVEY NORTH BOUNDARY, T. 10 N., R. 5 E.

Chains

Reestablishment of surveys executed by
T.C. Bailey and J.G. Burrill, U.S.
Deputy Surveyors, in 1875, and resurveyed
by A.P. Hansen and H.E. Giers, in 1900.

N. 89°19' W., bet. secs. 2 and 35.

Ascend gradually along bottom of Old Canyon, through
dense undergrowth.

12.40 Junction of draw from S. 60° W. with Old Canyon; continue
gradual ascent along general bottom of Old Canyon, through
dense aspen timber, bears NW. and S. 70° E.

41.52 The $\frac{1}{4}$ sec. cor. secs. 2 and 35, a sandstone, 36 x 24 x 20
ins., firmly set, marked $\frac{1}{4}$ on N. face. Cor. has no
accessories.

At the cor. point, at the S. edge of graded Forest Service
road, bears easterly and westerly.

Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in
the ground, with the original cor. monument deposited at
the base of the post, for $\frac{1}{4}$ sec. cor. secs. 2 and 35, with
brass cap marked

$$\frac{\frac{1}{4}}{S35}$$

1938

From which

An aspen, 6 ins. diam., bears N. 9°45' E., 66 lks.
dist., marked $\frac{1}{4}$ S35 BT.

An aspen, 8 ins. diam., bears S. 66°30' W., 22 lks.
dist., marked $\frac{1}{4}$ S2 BT.

Thence, N. 87°18' W.,

7.30 Graded Forest Service road, bears N. 85° E. and S. 60° W.

19.30 Recross road, bears S. 80° E. and N. 70° W.

35.50 Leave bottom lands of Old Canyon, drains easterly from
N. 80° W.; thence ascend gradually along steep N. slope
at S. side of canyon, through dense aspen and pine timber.

39.31 The cor. of secs. 2, 3, 34, and 35, a sandstone, 12 x 12 x
10 ins., firmly set, marked 2 notches on E. edge and
4 notches on W. edge. Cor. is surrounded by a small mound
of stone and witnessed by one bearing tree as follows.

A spruce, 18 ins. diam., bears N. 62°30' W., 52 lks.
dist., marked S34 BT. I blaze and mark this tree
T11N R5E S34 BT.

At the cor. point, on steep N. slope in dense timber, 60
ft. above sec. cor.

Set an iron post, 3 ft. long, 2 ins. in diam., 30 ins. in
the ground, with the original cor. monument deposited at
the base of the post, for cor. of secs. 2, 3, 34, and 35,
with brass cap marked

DEPENDENT RESURVEY NORTH BOUNDARY, T. 10 N., R. 5 E.

Chains

T11N	R5E
S34	S35
S3	S2
T10N	

1938

I mark additional bearing trees to cor. as follows.

A spruce, 12 ins. diam., bears N. $52^{\circ}30'$ E., 52 lks. dist., marked T11N R5E S35 BT..

A spruce, 10 ins. diam., bears S. $51^{\circ}45'$ E., 7 lks. dist., marked T10N R5E S2 BT..

A spruce, 12 ins. diam., bears S. $50^{\circ}30'$ W., 5 lks. dist., marked T10N R5E S3 BT...

Land, rolling and mountainous, with a general easterly exposure and drainage.

Soil, shallow clay and sand loam; 3rd rate.

Timber, aspen, spruce, balsam, white pine, and Douglas fir, on W. portion of mile.

Undergrowth, sagebrush, browse, grass, and weeds.

Good grazing land..

Reestablishment of surveys executed by J.H. Martineau, U.S. Deputy Surveyor, in 1878, and resurveyed by A.P. Hansen and H.E. Giers, U.S. Deputy Surveyors, in 1900.

S. $88^{\circ}21'$ W., along the S. bdy. of sec. 34, T. 11 S., R. 5 E.

Ascend gradually along steep N. slope of mountainous land, at the S. side of Old Canyon, through dense timber and undergrowth.

39.52 The $\frac{1}{4}$ sec. cor. set for secs. 3 and 34, a Douglas fir, 10 ins. diam., blazed and marked $\frac{1}{4}$ on N. face. Cor. is witnessed by two bearing trees as follows.

A spruce, 10 ins. diam., bears South, 7 lks. dist., upon which I find dim scribe marks.

A spruce, 6 ins. diam., bears N. 30° E., 20 lks. dist., upon which I find dim scribe marks.

At the cor. point, on steep N. slope, 180 ft. above sec. cor.

Set an iron post, 3 ft. long, 1 in. diam., 30 ins in the ground, for $\frac{1}{4}$ sec. cor. sec. 34, T. 11 N., R. 5 E., with brass cap marked

 $\frac{1}{4}$ S34

1938

I mark additional bearing trees to cor. as follows.

A spruce, 8 ins. diam., bears N. 24° E., 25 lks. dist., marked $\frac{1}{4}$ S34 BT.

A spruce, 8 ins. diam., bears N. 26° W., 15 lks. dist., marked $\frac{1}{4}$ S34 BT.

DEPENDENT RESURVEY NORTH BOUNDARY, T. 10 N., R. 5 E.

- Chains
- Thence, West.
- 8.70 Top of ascent on steep N. slope, 20 ft. above the $\frac{1}{4}$ sec. cor., bears N. and S.; descend gradually along steep N. slope.
- 13.50 Small draw, 20 ft. deep, drains N.; continue ascent.
- 19.50 Spur, 20 ft. high, slopes NW.
- 23.30 Short ravine, 110 ft. below top of ascent, drains N. 30° ascend steep E. slope.
- 31.50 Spur, 90 ft. above ravine, slopes N.; descend abrupt NW. slope.
- 39.78 The cor. set for secs. 3, 4, 33, and 34, a quartzite, 10 x 9 x 9 ins., firmly set, upon which I find dim notches on E. and W. edges. Cor. is witnessed by two bearing trees as follows.

The stump of a burned pine, 10 ins. diam., bears S. 44° E., 27 lks. dist., upon which I find dim scribe marks.

The stump of a burned pine, 10 ins. diam., bears S. $12^\circ 30'$ W., 34 lks. dist., upon which I find dim scribe marks.

At the cor. point, on NW. slope, at S. edge of bottom of Old Canyon, 90 ft. below spur.

Set an iron post, 3 ft. long, 2 ins. in diam., 30 ins. in the ground, with the original cor. monument deposited at the base of the post, for cor. of secs. 33 and 34, T. 11 N. R. 5 E., with brass cap marked

T11N	R5E
S33	S34

S4
T10N R5E

1938

I mark additional bearing trees to cor. as follows.

A spruce, 10 ins. diam., bears N. $39^\circ 15'$ E., 21 lks. dist., marked T11N R5E S34 BT.

A spruce, 6 ins. diam., bears N. 40° W., 32 lks. dist., marked T11N R5E S33 BT.

Land, mountainous, with a general northerly exposure and drainage.

Soil, shallow loam mixed with rock; 4th rate.

Timber, aspen, spruce, balsam, Douglas fir, lodge pole pine, and white pine.

Undergrowth, sagebrush, willows, dwarf timber, browse, weeds, and grass.

Good grazing land.

S. $89^\circ 52'$ W., along the S. bdy. sec. 33, T. 11 N., R. 5 E.

Across bottom lands of Old Canyon, through dense timber and undergrowth.

5.60 Bottom of Old Canyon, drains NE. Forest Service graded road in bottom of canyon, bears NE. and SW.; ascend abrupt

DEPENDENT RESURVEY NORTH BOUNDARY, T. 10 N., R. 5 E.

Chains ledgy E. slope.

- 8.50 Slope changes from an abrupt E. slope to an abrupt NE. slope; thence along NE. slope of spur to the S.
- 16.80 Slope changes from an abrupt NE. slope to an abrupt N. slope; thence along N. slope near top of spur to the S.
- 26.00 Slope changes from an abrupt N. slope to a gradual NE. slope.
- 39.26 The 1/4 sec. cor. set for secs. 4 and 33, a quartzite, 12 x 10 x 5 ins., firmly set, marked on N. face. Cor. has no accessories.

At the cor. point, on general NE. slope, 590 ft. above the sec. cor.

Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, with the original cor. monument deposited at the base of the post, for 1/4 sec. cor. sec. 33, T. 11 N., R. 5 E., with brass cap marked

1/4 S33

. 1938 .

From which

A spruce, 10 ins. diam., bears N. 29°45' E., 48 lks. dist., marked 1/4 S33 BT.

A balsam, 6 ins. diam., bears N. 42°30' W., 54 lks. dist., marked 1/4 S33 BT.

Thence, S. 88°31' W.

- 14.00 Spur, 120 ft. above the 1/4 sec. cor., projects SE.; descend gradually along SW. slope.
- 28.70 Base of descent, 20 ft. below spur, bears NW. and SE.; ascend gradual SE. slope.
- 39.83 The cor. set for secs. 4, 5, 32, and 33, an aspen, 10 ins. diam., upon which I find blazes and dim scribe marks on all four sides of tree. Cor. is witnessed by three bearing trees as follows.

A spruce, 12 ins. diam., bears N. 15° E., 27 lks. dist., upon which I find a blaze and dim scribe marks. I blaze and mark this tree T11N R5E S33 BT.

A spruce, 16 ins. diam., bears S. 41° E., 25 lks. dist., upon which I find dim scribe marks.

An aspen, 10 ins. diam., bears S. 37°45' W., 38 lks. dist., upon which I find a blaze and dim scribe marks.

At the cor. point, on top of junction of spurs, 230 ft. above base of descent, projects N. 80° E. and S. 80° E. from the W.

Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, for the cor. of secs. 32 and 33, T. 11 N., R. 5 E., with brass cap marked

T11N R5E
S32 S33

S5
T10N R5E
1938

DEPENDENT RESURVEY NORTH BOUNDARY, T. 10 N., R. 5 E.

Chains I mark an additional bearing tree to cor. as follows.

- A spruce, 12 ins. diam., bears N. 57° W., 56 lks. dist., marked T11N R5E S32 BT.

Land, broken and mountainous, with a general easterly exposure and drainage.

Soil, shallow dark loam; 3rd rate.

Timber, aspen, spruce, balsam, Douglas fir, white, and lodge pole pine.

Undergrowth, sagebrush, mahogany, oak, dwarf timber, and mountain laurel.

Good grazing land.

N. $89^{\circ}07'$ W., along the S. bdy. of sec. 32, T. 11 N., R. 5 E.

Ascend gradually along general top of spur, through dense timber and undergrowth.

- 15.80 Leave top of spur, 50 ft. above cor., projects E. from N. 70° W.; descend gradual SW. slope.
- 27.20 Head of draw, 30 ft. below spur, drains S.; ascend gradual SE. slope.
- 33.30 Head of draw, drains SE., and heads NW., about 6.00 chs. dist.; continue ascent over SE. slope.
- 39.68 The $\frac{1}{4}$ sec. cor. originally set for secs. 5 and 32, a quartzite, 12 x 8 x 6 ins., loosely set, marked $\frac{1}{4}$ on N. face. Cor. is witnessed by two bearing trees as follows.

A lodge pole pine, 12 ins. diam., bears S. 70° W., 6 lks. dist., marked $\frac{1}{4}$ S5 BT. I efface the marks on this bearing tree.

A dead lodge pole pine, 12 ins. diam., bears N. 35° W., 26 lks. dist., marked $\frac{1}{4}$ S32 BT.

At the cor. point, on SE. slope, 50 ft. above head of draw at the 15.80 chs. point.

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, with the original cor. monument deposited at the base of the post, for $\frac{1}{4}$ sec. cor. sec. 32, T. 11 N., R. 5 E., with brass cap marked

$\frac{1}{4}$ S32

1938

I mark additional bearing trees to cor. as follows.

A lodge pole pine, 10 ins. diam., bears N. 27° E., 46 lks. dist., marked $\frac{1}{4}$ S32 BT.

A lodge pole pine, 10 ins. diam., bears N. 34° W., 32 lks. dist., marked $\frac{1}{4}$ S32 BT.

Thence, S. $89^{\circ}24'$ W.

- 3.90 Ease of abrupt ascent through dense timber and undergrowth, over SE. slope, bears NE. and SW.
- 13.70 Leave timber, bears NE. and SW.

DEPENDENT RESURVEY NORTH BOUNDARY, T. 10 N., R. 5 E.

Chains

21.00 Top of the main divide ridge of the Wasatch Mountain Range, 460 ft. above the 1/4 sec. cor., bears N. 20° E. and S. 20° W. From this point on line, a good view of Bear Lake to the N. can be had.

July 11, 1938: Stationed at the above point on line, in approximate latitude 41°38' N., longitude 111°24' W., at 1h 41.3m p.m. by my watch which carries correct 105th meridian standard time, I make an hour angle observation upon Polaris west of the meridian, making four observations, two each with the telescope in direct and reversed positions, reading the horizontal deflection angle from a flag pole on line to the west, in a clockwise direction to the star.

Local mean time of observation..... 1h 15.7m p.m.
Mean horizontal deflection angle..... 89° 16'
Azimuth of Polaris..... 1° 20' W.
True bearing to flag pole..... S. 89°24' W.

22.50 Enter dense timber, bears N. and S.

30.50 Draw, 70 ft. below ridge, drains N.; ascend gradual NE. slope...

38.00 Spur, 60 ft. above draw, projects N. 20° W.; descend gradual W. slope.

40.72 Proportionate distance; find no trace of the cor. of secs. 5, 6, 31, and 32.

On gradual W. slope, 10 ft. below spur.

Set an iron post, 3 ft. long, 2 ins. in diam., 30 ins. in the ground, for the restored cor. of secs. 31 and 32, T. 11 N., R. 5 E., with brass cap marked

T11N R5E
S31 S32

S6
T10N R5E

1938

From which

A spruce, 12 ins. diam., bears N. 45° E., 3 lks. dist., marked T11N R5E S32 BT.

A spruce, 18 ins. diam., bears N. 70° W., 11 lks. dist., marked T11N R5E S31 BT..

Land, high and mountainous, with a general northerly and southeasterly exposure and drainage. Soil, shallow dark loam, with a gravelly surface; 3rd rate.

Timber, aspen, spruce, balsam, lodge pole pine and white pine.

Undergrowth, sagebrush, dwarf timber, mountain laurel, browse, weeds, and grass.

Good grazing land.

S. 89°24' W., along the S. bdy. of sec. 31, T. 11 N., R. 5 E.

Descend gradual W. and NW. slopes of high mountainous land, through dense timber and undergrowth.

DEPENDENT RESURVEY NORTH BOUNDARY, T. 10 N., R. 5 E.

Chains

14.90 Draw, 230 ft. below cor., drains N. 20° E.; ascend abrupt NE. slope.

19.84 The established point for the cor. of Ts. 10 N., Rs. 4 and 5 E. No trace of the original cor. found.

On NE. slope, 90 ft. above draw.

Set an iron post, 3 ft. long, 3 ins. in diam., 30 ins. in the ground, for restored cor. of Ts. 10 N., Rs. 4 and 5 E. with brass cap marked

T11N R5E
S31

S1	S6
R4E	R5E
T10N	

1938

From which

A balsam, 8 ins. diam., bears S. 33° E., 60 lks. dist., marked T10N R5E S6 BT.

A balsam, 7 ins. diam., bears S. 9°30' W., 48 lks. dist., marked T10N R4E S1 BT.

The above cor. was set at a point 400.00 chs. easterly (record distance) from the cor. of secs. 5 and 6, T. 10 N. R. 4 E., which cor. was set by J.H. Martineau, U.S. Deputy Surveyor during his survey of this township in 1881, and which is the nearest identified cor. to the west of the Martineau survey of the N. bdy. T. 10 N., R. 4 E. In the field examination of T. 10 N., R. 5 E., under this group, a line extended North from the cor. of Ts. 9 and 10 N., Rs. 4 and 5 E., intersects the S. bdy. of T. 11 N., R. 5 E. N. 89°24' E., 52.31 chs. dist. from the cor. of Ts. 10 and 11 N., Rs. 4 and 5 E., thus indicating that the Martineau survey is in no way related to the T.C. Bailey and J.G. Burrill surveys in T. 10 N., R. 5 E., but that the cor. of Ts. 9 and 10 N., Rs. 4 and 5 E., is concordantly related to the original Martineau surveys along the N. bdy. of T. 10 N., R. 4 E., therefore, only the cor. of secs. 5 and 6, T. 10 N., R. 4 E., is used in the establishment of the east and west position of the cor. of T. 10 N., Rs. 4 and 5 E...

The position of the cor. of secs. 5 and 6, T. 10 N., R. 4 E., was determined by a retracement made of the N. bdy. of T. 10 N., R. 4 E. Cor. is a sandstone, 20 x 10 x 8 ins. firmly set in the ground and mound of stone, marked 1 notch on W. edge and 5 notches on E. edge.

Continue S. 89°24' W.

20.30 Spur, 100 ft. above draw, projects N. 20° E.; descend gradual NW. slope.

30.10 Descent becomes abrupt, bears NE. and SW.

30.70 Draw, 190 ft. below spur, drains N. 20° E., 1.50 chs. dist., thence NW.; ascend NE. slope.

31.90 Spur, 50 ft. above draw, projects N., 3.00 chs. dist. to end; descend NW. slope.

34.30 Draw, 80 ft. below spur, drains N. 10° E.; ascend steep NE. slope.

DEPENDENT RESURVEY NORTH BOUNDARY, T. 10 N., R. 5 E.

Chains
40.72

Proportionate distance; find no trace of the $\frac{1}{4}$ sec. cor. set for secs. 6 and 31.

On abrupt NE. slope, 100 ft. above draw.

Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, for the $\frac{1}{4}$ sec. cor. sec. 31, T. 11 N., R. 5 E., with brass cap marked

 $\frac{1}{4}$ S31

1938

From which

A lodge pole pine, 11 ins. diam., bears N. 55° E., 38 lks. dist., marked $\frac{1}{4}$ S31 BT.

A lodge pole pine, 14 ins. diam., bears N. 17° W., 8 lks. dist., marked $\frac{1}{4}$ S31 BT.

41.30 Ridge, 70 ft. above the $\frac{1}{4}$ sec. cor., bears N. and S.; descend abrupt W. slope.

44.30 Slope changes from a W. slope to a NW. slope.

50.00 Draw, 150 ft. below ridge, drains N. 20° E.; ascend gradual NE. slope.

60.20 Flat top of ridge, 220 ft. above draw, bears N. and S.; leave timber, bears with ridge; descend gradual W. slope.

68.41 The cor. set for Ts. 10 and 11 N., Rs. 4 and 5 E., a sandstone, 16 x 10 x 4 ins., loosely set, in the ground and mound of stone, marked 6 grooves on all four faces.

At the cor. point, on W. slope, 60 ft. below top of ridge.

Set an iron post, 3 ft. long, 3 ins. diam., 30 ins. in the ground, with the original cor. monument deposited at the base of the post, for cor. of Ts. 11 N., Rs. 4 and 5 E., with brass cap marked

T11N

R4E	R5E
S36	S31

T10N R4E S1

1938

Raise a mound of stone, 4 ft. base, 3 ft. high, N. of cor.

Land, high and mountainous, with a general northerly exposure and drainage.

Soil, shallow gravel and clay loam; 3rd rate.

Timber, aspen, balsam, lodge pole pine, white pine, Douglas fir, and spruce.

Undergrowth, sage, service berry, and deer brush, dwarf timber, mountain laurel, browse, weeds, and grass.

Good grazing land.

DEPENDENT RESURVEY EAST BOUNDARY, T. 10 N., R. 4 E.

Chains

Reestablishment of surveys executed by J.H. Martineau, U.S. Deputy Surveyor, in 1878, and resurveyed by him in 1881.

Note: Searches were made for cors. on this boundary at intervals of 40.00 chs. and no cors. of the original or resurvey were found.

August 22, 1938: Stationed at the cor. of Ts. 9 and 10 N., Rs. 4 and 5 E., an iron post, 3 ins. in diam., set, marked and witnessed, as described in the official record of the survey of T. 9 N., R. 5 E., Group 33, Utah., in approximate latitude 41°33' N., longitude 111°25' W., at 8h 16.1m a.m. by my watch which carries correct 105th meridian standard time, I make an hour angle observation upon Polaris west of the meridian, making four observations, two each with the telescope in direct and reversed positions, reading the horizontal deflection angle from a flag pole about 25 chains N., in a counter clockwise direction to the star


Local mean time of observation..... 7h 50.8m a.m.
Mean horizontal deflection angle..... 1° 14'
Azimuth of Polaris..... 1° 14' W.
True bearing to flag pole North.

I deflect an angle of 0°27' to the W. of the true meridian thence, from the above cor.

N. 0°27' W., along the E. bdy. sec. 36, T. 10 N., R. 4 E.

Descend abrupt N. slope of high mountainous land, through scattered timber and dense undergrowth.

- 7.80 Ravine, 170 ft. below cor., drains E.; ascend steep S. slope.
- 25.60 Spur, 390 ft. above ravine, projects E.; descend abrupt NE. slope.
- 35.50 Ravine, 170 ft. below spur, drains E.; ascend abrupt SE. slope.
- 39.75 Proportionate distance; on steep SE. slope, 120 ft. above ravine.
Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for restored $\frac{1}{4}$ sec. cor. secs. 31 and 36, with brass cap marked



- 42.60 Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor. Spur, 50 ft. above the $\frac{1}{4}$ sec. cor., projects E.; descend gradually along steep E. slope.
- 51.00 Slope changes from a steep E. slope to a steep NE. slope.
- 55.50 Ravine, 120 ft. below spur, drains S. 70° E.; ascend abrupt ledgy SW. slope.
- 60.50 Spur, 110 ft. above ravine, projects SE.; descend abrupt NE. slope.
- 67.10 Ravine, 120 ft. below spur, drains S. 75° E.; ascend abrupt SW. slope.

DEPENDENT RESURVEY EAST BOUNDARY, T. 10 N., R. 4 E.

Chains

- 75.00 Spur, 150 ft. above ravine, projects S. 80° E.; descend gradual NE. slope.
- 79.50 Proportionate distance; on gradual E. slope, 20 ft. below spur.
- Set an iron post, 3 ft. long, 2 ins. in diam., 30 ins. in the ground, for restored cor. of secs. 25 and 36, T. 10 N., R. 4 E., with brass cap marked

TION

R4E	R5E
S25	
S36	S31

1938

From which

A white pine, 13 ins. diam., bears S. 86° W., 66 lks. dist., marked TION R4E S36 BT.

A white pine, 12 ins. diam., bears N. 54° W., 60 lks. dist., marked TION R4E S25 BT.

Land, high and mountainous with a general easterly exposure and drainage.
Soil, shallow gravel with a rocky surface; 4th rate.
Timber, aspen, spruce, balsam, white pine, and Douglas fir.
Undergrowth, sage, oak, service berry, and buck brush, mahogany, mountain laurel, browse, weeds, and grass.
Good grazing land.

N. 0°27' W., along the E. bdy. sec. 25, T. 10 N., R. 4 E.

Descend gradual NE. slope of high mountainous land, through medium dense timber and undergrowth.

- 17.90 Ravine, 200 ft. below cor., drains E.; ascend steep SE. slope.
- 22.50 Spur, 120 ft. above ravine, projects SE.; descend steep NE. slope.
- 28.90 Ravine, 100 ft. below spur, drains SE.; ascend steep S. slope.
- 39.75 Proportionate distance; on S. slope, 200 ft. above ravine.
Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, for restored $\frac{1}{4}$ sec. cor. sec. 25, T. 10 N., R. 4 E., with brass cap marked.

$\frac{1}{4}$ S25

1938

From which

A balsam, 4 ins. diam., bears S. 75° W., 62 lks. dist., marked $\frac{1}{4}$ S25 BT.

An aspen, 4 ins. diam., bears N. 13° W., 57 lks. dist., marked $\frac{1}{4}$ S25 BT.

- 47.70 Ridge, 50 ft. above the $\frac{1}{4}$ sec. cor., bears SE. and N. 80° W.; descend gradual NE. slope.

DEPENDENT RESURVEY EAST BOUNDARY, T. 10 N., R. 4 E.

- Chains
- 52.80 Slope changes from a gradual NE. slope to an abrupt N. slope.
 - 58.90 Head of ravine, 130 ft. below ridge, drains E.; ascend S. slope.
 - 66.10 Spur, 130 ft. above head of ravine, projects E., about 10.00 chs. dist. to end; descend gradual NE. slope.
 - 77.00 Ravine near head, 100 ft. below spur, drains SE.; ascend gradual SW. slope.
 - 79.50 Proportionate distance; on SW. slope, 20 ft. above ravine
- Set an iron post, 3 ft. long, 2 ins. in diam., 30 ins. in the ground, for restored cor. of secs. 24 and 25, T. 10 N. R. 4 E., with brass cap marked

T10N	
S24	T10N
	R5E
S25	S30
R4E	

1938

From which

A balsam, 12 ins. diam.; bears S. 78°30' W., 1 1/3 lks. dist., marked T10N R4E S25 BT.

An aspen, 5 ins. diam.; bears N. 44° W., 49 lks. dist.; marked T10N R4E S24 BT.

Land, high and mountainous, with a general easterly exposure and drainage.

Soil, shallow sand and clay loam; 4th rate.

Timber, aspen, balsam, spruce, white pine, and Douglas fir

Undergrowth, sagebrush, mountain laurel, browse, weeds, and grass.

Good grazing land.

N. 0°27' W., along the E. bdy. of sec. 24, T. 10 N., R. 4 E

Ascend gradual SW. slope of high mountainous land, through medium dense timber and undergrowth.

- 11.40 Ridge, 110 ft. above cor., bears W. and SE.; descend steep N. slope.

- 19.30 Slope changes from a N. slope to a NW. slope.

- 30.00 Ravine; 180 ft. below ridge, drains SE., about 5.00 chs. dist., thence E.; ascend gradual SW. slope.

- 38.75 Proportionate distance; on S.W. slope, 120 ft. above ravine.

Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, for 1/4 sec. cor. sec. 24, T. 10 N., R. 4 E., with brass cap marked

S24

1938

From which

A spruce, 9 ins. diam., bears S. 62°45' W., 38 lks. dist., marked S24 BT.

DEPENDENT RESURVEY EAST BOUNDARY, T. 10 N., R. 4 E.

Chains

- A. spruce, 18 ins. diam., bears N. $44^{\circ}15'$ W., 69 lks. dist., marked $\frac{1}{4}$ S24 BT.
- 45.60 Spur, 70 ft. above the $\frac{1}{4}$ sec. cor., projects SE.; descend gradual NE. slope.
- 60.10 Six Bit Hollow, 220 ft. below spur, drains E.; ascend gradual S. slope.
- 65.80 Spur, 70 ft. above hollow, projects SE.; descend gradual NE. slope.
- 70.80 Fork of Six Bit Hollow, 40 ft. below spur, drains S. 60° E.; ascend gradual S. slope.
- 79.50 Proportionate distance; on gradual S. slope, 120 ft. above hollow.

Set an iron post, 3 ft. long, 2 ins. in diam., 30 ins. in the ground, for the cor. of secs. 13 and 24, T. 10 N., R. 4 E., with brass cap marked

T10N		T10N
S13		R5E
S24		S18
R4E		

1938

From which

A spruce, 12 ins. diam., bears N. 26° W., 300 lks. dist., marked T10N, R4E S13 BT.

No other suitable bearing trees available.

Land, high and mountainous, with a general easterly exposure and drainage.

Soil, shallow sand and clay loam; 3rd rate.

Timber, aspen, balsam, Douglas fir, and spruce.

Undergrowth, sagebrush, scrub and dwarf timber, mountain laurel, and service berry.

Good grazing land.

N. $0^{\circ}27'$ W., along the E. bdy. of sec. 13, T. 10 N., R. 4 E.

Ascend gradual S. slope of high mountainous land, through dense timber and undergrowth.

- 3.10 Top of ridge, 10 ft. above cor., bears E. and W.; descend gradual NE. slope.
- 13.10 Head of draw, 70 ft. below ridge, drains SE.; trail in bottom of draw, bears NW. and SE.; ascend gradual SW. slope.
- 15.10 Ridge, 20 ft. above draw, bears E. and W.; descend gradual N. slope.
- 16.90 The E. edge of a large sink hole.
- 19.10 Swale, 20 ft. below ridge, drains E.; ascend gradual S. slope.
- 34.20 Ridge, 100 ft. above swale, bears N. 60° W. and S. 60° E.
- 39.75 Proportionate distance; on gradual NE. slope, 80 ft. below ridge.

DEPENDENT RESURVEY EAST BOUNDARY, T. 10 N., R. 4 E.

Chains

Set an iron post, 30 ft. long, 1 in. in diam., 30 ins. in the ground, for restored $\frac{1}{4}$ sec. cor. sec. 13, T. 10 N., R. 4 E., with brass cap marked

$\frac{1}{4}$ S13

1938

From which

A balsam, 12 ins. diam., bears S. 72° W., 15 lks. dist., marked $\frac{1}{4}$ S13 BT.

A balsam, 12 ins. diam., bears N. 25° W., 32 lks. dist., marked $\frac{1}{4}$ S13 BT.

40.00 Ravine, 10 ft. below the $\frac{1}{4}$ sec. cor., drains E.; ascend gradual S. slope.

47.10 Small rise, 30 ft. above ravine, bears W. and slopes E.; descend gradual NE. slope.

58.30 Ravine, 80 ft. below rise, drains E.; ascend gradual SE. slope.

67.40 Spur, 100 ft. above ravine, slopes E.; descend gradual NE. slope.

79.50 Proportionate distance; on gradual NE. slope, 120 ft. below ridge.

Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, for restored cor. of secs. 12 and 13, T. 10 N., R. 4 E., with brass cap marked

T10N

S12

S13

R4E

T10N

R5E

S7

1938

From which

A balsam, 14 ins. diam., bears S. 27° W., 11 lks. dist., marked T10N R4E S13 BT.

A balsam, 8 ins. diam., bears N. 27° W., 5 lks. dist., marked T10N R4E S12 BT.

Land, high and mountainous, with a general easterly exposure and drainage.

Soil, shallow clay and sand loam; 3rd rate.

Timber, aspen, balsam, spruce, and Douglas fir.

Undergrowth, sagebrush, dwarf timber, mountain laurel, browse, weeds, and grass.

Good grazing land.

N. 0°27' W., along E. bdy. of secs. 12, T. 10 N., R. 4 E.

Descend gradual NE. slope of rolling mountainous land, through dense timber and undergrowth.

15.20 Ravine, 30 ft. below cor., drains S. 60° E.; ascend gradual SE. slope.

DEPENDENT RESURVEY EAST BOUNDARY, T. 10 N., R. 4 E.

Chains

- 17.80 Spur, 30 ft. above ravine, projects E.; descend steep N. slope.
- 22.80 Slope changes from a N. slope to a NE. slope.
- 31.90 Head of draw, 80 ft. below spur, drains E.; ascend gradual S. slope.
- 35.60 Slope changes from a S. slope to a SE. slope.
- 39.75 Proportionate distance; on gradual SE. slope, 80 ft. above head of draw.
- Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, for restored $\frac{1}{4}$ sec. cor. sec. 12, T. 10 N., R. 4 E., with brass cap marked

$\frac{1}{4}$ S12 |

1938

From which

An aspen, 4 ins. diam., bears S. $50^{\circ}30'$ W., 122 lks. dist., marked $\frac{1}{4}$ S12 BT.

A balsam, 12 ins. diam., bears N. 75° W., 100 lks. dist., marked $\frac{1}{4}$ S12 BT.

- 45.40 Spur, 20 ft. above the $\frac{1}{4}$ sec. cor., projects SE.; descend gradual NE. slope.
- 46.50 Head of ravine, 20 ft. below spur, drains SE.; ascend gradual S. and SE. slopes.
- 61.70 Top of the main divide ridge of the Wasatch Mountain Range, 320 ft. above head of ravine, bears N. $47^{\circ}30'$ E., and S. $47^{\circ}30'$ W.; descend gradually along W. slope.
- 67.60 Slope changes from a W. slope to a N. slope.
- 79.30 Graded Forest Service road, bears southeasterly and southwestesterly.
- 79.50 Proportionate distance; at the N. edge of the Forest Service road, 300 ft. below top of divide ridge.
- Set an iron post, 3 ft. long, 2 ins. in diam., 30 ins. in the ground, for restored cor. of secs. 1 and 12, T. 10 N., R. 4 E., with brass cap marked

T10N

S1

S12

R4E

T10N

R5E

S7

1938

From which

A balsam, 7 ins. diam., bears S. $49^{\circ}30'$ W., 56 lks. dist., marked T10N R4E S12 BT.

A balsam, 7 ins. diam., bears N. 67° W., 55 lks. dist., marked T10N R4E S1 BT.

Land, high and mountainous, with a general southeasterly and northwesterly exposure and drainage.

DEPENDENT RESURVEY EAST BOUNDARY, T. 10 N., R. 4 E.

Chains

Soil, shallow gravel with a rocky surface; 4th rate. Timber, aspen, spruce, balsam, and Douglas fir. Undergrowth, sagebrush, mountain laurel, dwarf timber, browse, weeds, and grass. Good grazing land.

N. 0°27' W., along the E. bdy. sec. 1, T. 10 N., R. 4 E.

Descend abrupt NW. slope of high mountainous land, through dense timber and undergrowth.

- 10.30 Dry draw at the head of Curtis Creek, 140 ft. below the sec. cor., drains NW.; thence descend gradually along W. slope.
- 21.20 Bottom of main draw at head of Curtis Creek, 60 ft. below last draw, drains W.; ascend gradual S. slope.
- 23.00 Graded Forest Service road, bears N. 84° E. to Randolph, Utah, and S. 84° W. to the Curtis Creek Ranger Station, located in the central part of sec. 1, T. 10 N., R. 4 E.
- 39.75 Proportionate distance; on S. slope, 240 ft. above draw. Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, for restored $\frac{1}{4}$ sec. cor. sec. 1, T. 10 N., R. 4 E., with brass cap marked

$\frac{1}{4}$ S1 |
1938

From which

- An aspen, 5 ins. diam., bears S. 27° W., 31 lks. dist., marked $\frac{1}{4}$ S1 BT.
- An aspen, 5 ins. diam., bears N. 34° W., 95 lks. dist., marked $\frac{1}{4}$ S1 BT..

- 41.20 The SE. point of spur, 50 ft. above the $\frac{1}{4}$ sec. cor.; descend gradual NE. slope.
- 53.00 Ravine, 60 ft. below spur, drains S. 80° E.; ascend gradual SE. slope.
- 56.50 Small spur, 30 ft. above ravine, projects E.; descend gradual NE. slope.
- 60.30 Ravine, 20 ft. below spur, drains S. 40° E.; ascend gradual SW. slope.
- 73.00 Ridge, 80 ft. above ravine, bears S. 60° E. and W.; descend gradual NE. slope.
- 79.50 The cor. of Ts. 10 N., Rs. 4 and 5 E., 30 ft. below ridge. Land, high and mountainous, with a general southerly and westerly exposure and drainage. Soil, shallow sand and clay loam; 4th rate. Timber, aspen, balsam, white pine, spruce, and lodge pole pine. Under growth, sagebrush, willows, dwarf timber, mountain laurel, browse, weeds, and grass. Good grazing land.

DEPENDENT RESURVEY OF SUBDIVISION, T. 10 N., R. 5 E.

Chains

Reestablishment of surveys executed by
T.C. Bailey and J.G. Burrill, U.S. Deputy
Surveyors, in 1875.

From the cor. of secs. 35 and 36, T. 10 N., R. 5 E., identical with angle point No. 2, tract 38, and angle point No. 1, tract 39, T. 9 N., R. 5 E., an iron post, 1 in. in diam., set, marked and witnessed, as described in the official record of the resurvey of T. 9 N., R. 5 E., Group 33, Utah.

N. 0°26' W., bet. secs. 35 and 36, T. 10 N., R. 5 E.

Ascend gradual S. slope of rolling mountainous land, through dense short undergrowth.

- 5.40 Ridge, 80 ft. above cor., bears N. 70° E. and S. 70° W.; unimproved road on top of ridge, bears with same; descend abrupt N. slope.
- 17.20 Slope changes from an abrupt N. slope to a steep NW. slope.
- 24.00 Hollow, 320 ft. below ridge, drains N. 75° E.; ascend steep SE. slope.
- 34.00 Head of small ravine, drains SE.; continue ascent over general SE. slope.
- 39.80 Proportionate distance; find no trace of the $\frac{1}{4}$ sec. cor.
On steep SE. slope, 100 ft. above hollow.
Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, for restored $\frac{1}{4}$ sec. cor. secs. 35 and 36, with brass cap marked

$\frac{1}{4}$
S35 | S36
1938

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

- 50.80 Unimproved road on top of Thousand Dollar Ridge, 20 ft. above the $\frac{1}{4}$ sec. cor., bears N. 70° E. and S. 70° W.; descend gradual NW. slope.
- 79.60 The cor. of secs. 25, 26, 35, and 36, a sandstone, 12 x 9 x 4 ins., loosely set in the ground and small mound of stone, marked 1 groove on E. and S. faces. Cor. has no accessories.
At the cor. point, on gradual NW. slope., 120 ft. below ridge.
Set an iron post, 3 ft. long, 2 ins. in diam., 30 ins. in the ground, with the original cor. monument deposited alongside the iron post, for cor. of secs. 25, 26, 35, and 36, with brass cap marked

T10N R5E
S26 | S25
S35 | S36
1938

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

DEPENDENT RESURVEY OF SUBDIVISION, T. 10 N., R. 5 E.

Chains

From this cor., a limestone 12 x 10 x 5 ins. above ground firmly set, marked 1 groove on E. and S. faces, bears S. $60^{\circ}34'$ E., 19.86 chs. dist. As there is no official record of this cor., I efface the marks on same.

Land, rolling and mountainous with a general easterly exposure and drainage.

Soil, shallow gravel with a rocky surface; 4th rate. No timber.

Undergrowth, sage, service berry, and bitter brush, browns weeds, and grass.

Good grazing land.

From the cor. of secs. 25, 30, 31, and 36, on the E. bdy. of the township.

N. $88^{\circ}52'$ W., bet. secs. 25 and 36.

Ascend gradually along NE. slope of Thousand Dollar Ridge, through dense short undergrowth.

4.35 Old road, bears NE. and SW.

8.30 Unimproved road, bears NE. and SW.

26.20 Top of ascent, 30 ft. above cor., bears NE. and SW.; descend gradual NW. slope.

40.21 The 4 sec. cor. secs. 25 and 36, a sandstone, 18 x 8 x 4 ins., firmly set, marked 1 on N. face. Cor. has no accessories.

At the cor. point, on gradual NW. slope, 30 ft. below top of ascent.

Set an iron post, 3 ft. long, 1 in. in d'am., 30 ins. in the ground, with the original cor. monument deposited at the base of the iron post, for 4 sec. cor. secs. 25 and 36 with brass cap marked

S25

$$\frac{S25}{4}$$

S36

1938

Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.

From this cor., a limestone, 12 x 10 x 3 ins., firmly set, marked 1 on N. face, bears S. $61^{\circ}54'$ E., 19.55 chs. dist. As there is no official record of this cor., I efface the marks on same.

Thence, S. $89^{\circ}47'$ W.

2.70 Head of shallow draw, 20 ft. below the 4 sec. cor., drains N. 30° E.; clump of dense aspen timber at head of draw; ascend gradual NE. slope.

13.80 Top of ascent, 70 ft. above head of draw, bears N. 20° E. and S. 20° W.; descend gradually along rolling N. slope.

33.30 Head of small ravine, 20 ft. below top of ascent, drains N., about 6.00 chs. dist., thence NW.; ascend gradual E. slope.

37.60 Flat top of spur, 30 ft. above head of ravine, slopes N. 30° W., about 10.00 chs. dist. to end; descend gradually along NW. slope.

DEPENDENT RESURVEY OF SUBDIVISION, T. 10 N., R. 5 E.

Chains

- 40.03 The cor. of secs. 25, 26, 35, and 36, 20 ft. below spur.
Land, rolling, with a general northerly exposure and drainage.
Soil, shallow gravel with a rocky surface; 4th rate.
Timber, small clumps of aspen.
Undergrowth, sagebrush, service berry, browse, weeds, and grass.
Good grazing land.
-
- N. 1°27' E., bet. secs. 25 and 26.
Descend gradually over rolling NW. slope of mountainous land, through dense undergrowth.
- 1.50 Spur, 20 ft. below cor., slopes N. 30° W.; descend gradual NE. slope.
- 8.00 Ravine, 150 ft. below sec. cor., drains W., about 4.00 chs. dist. to junction with ravine draining northerly; ascend gradual SW. slope.
- 12.30 Spur, 50 ft. above ravine, slopes N. 80° W., about 4.00 chs. dist. to end; descend broken NW. slope.
- 20.00 The SE. cor. of a barbed wire fence, bears westerly about 10.00 chs. dist.
- 24.90 From this point, the NE. cor. of a barbed wire fence, bears N. 31° W. For intersecting bearing, see that given at the 42.80 chs. point on this mile.
- 25.00 From this point, a small spring of good water in clump of dense aspen, bears West, 3.50 chs. dist. Water from spring flows northerly in bottom of wide draw with dense aspen and willows along bottom.
- 30.75 Road, bears N. 75° W. and S. 75° E.; from this point, a one room log cabin, bears S. 60°00' W., 6.30 chs. dist.
- 37.70 The South Fork Big Creek, stream of good clear water, 15 lks. wide, 10 ins. deep, in bottom of wide canyon, 270 ft. below spur, flows E. Dense undergrowth of willows along banks of stream and numerous beaver dams in stream which extend about 15.00 chs. to the E. and 30.00 chs. to the W.; ascend steep S. slope.
- 40.20 Proportionate distance; find no trace of the $\frac{1}{4}$ sec. cor. secs. 25 and 26.
At top of abrupt ascent from creek, 50 ft. above bottom, bears E. and W.
Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for the restored $\frac{1}{4}$ sec. cor. secs. 25 and 26, with brass cap marked
- $\frac{1}{4}$
S26 | S25
1938
- Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.
Thence ascend gradually over SE. slope.
- 42.80 From this point, the NE. cor. of barbed wire fence, bears N. 60° W.

DEPENDENT RESURVEY OF SUBDIVISION, T. 10 N., R. 5 E.

Chains

- 57.40 Draw, 60 ft. above the $\frac{1}{4}$ sec. cor., drains SE.; clumps of aspen timber along bottom of draw to the SE.; ascend gradual SW. slope.
- 73.80 Top of ascent, 70 ft. above draw, bears NE. and SW.; descend gradual NW. slope.
- 78.30 Draw, 20 ft. below top of ascent, drains SW. about 4.00 chs. dist. to junction with draw draining southerly.
- 80.40 The cor. of secs. 23, 24, 25, and 26, a sandstone, 12 x 11 x 6 ins., firmly set, marked 2 grooves on S. face and 1 groove on E. face. Cor. has no accessories.

At the cor. point, on N. edge of draw.

Set an iron post, 3 ft. long, 2 ins. in diam., 30 ins. in the ground, with the original cor. monument deposited alongside the iron post, for cor. of secs. 23, 24, 25, and 26, with brass cap marked

T10N R5E	
S23	S24
S26	S25

1938

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Land, rolling and mountainous, with a general southeasterly and northerly exposure and drainage into South Fork Big Creek.

Soil, shallow sand and clay loam; 3rd rate.

Timber, clumps of aspen on portions of mile.

Undergrowth, sagebrush, service berry, willows, browse, weeds, and grass.

Good grazing land.

From the cor. of secs. 19, 24, 25, and 30, on the E. bdy. of the township.

N. 89°17' W., bet. secs. 24 and 25.

Ascend steep NE. slope of rolling mountainous land, through dense undergrowth.

- 12.30 Spur, 220 ft. above cor., projects SE.; thence ascend gradually along rolling S. slope.

- 35.30 Spur, 60 ft. above last spur, projects S. 20° E.; descend gradual SW. slope.

- 39.64 Proportionate distance; find no trace of the $\frac{1}{4}$ sec. cor. secs. 24 and 25.

On gradual SW. slope, 20 ft. below spur.

Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, for restored $\frac{1}{4}$ sec. cor. secs. 24 and 25, with brass cap marked

S24	
$\frac{1}{4}$	S25

1938

DEPENDENT RESURVEY OF SUBDIVISION, T. 10 N., R. 5 E.

Chains

- Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.
- 46.70 Head of draw, 30 ft. below the $\frac{1}{4}$ sec. cor., drains S.; ascend steep SE. slope.
- 59.70 Forks of spurs, 120 ft. above head of ravine, projects SW. and S. 80° W.; descend gradual NW. slope.
- 77.30 Draw, 190 ft. below forks of spurs, drains S. 60° W.; thence along N. side of draw.
- 79.28 The cor. of secs. 23, 24, 25, and 26, 5 ft. below draw.
- Land, rolling and mountainous, with a general southerly exposure and drainage.
Soil, shallow gravel with a rocky surface; 4th rate.
No timber.
Undergrowth, sagebrush, service berry, browse, weeds, and grass.
Good grazing land.

N. $0^{\circ}45'$ E., bet. secs. 23 and 24.

Ascend gradual S. slope of rolling mountainous land, through dense short undergrowth.

- 6.00 Slope changes from a gradual S. slope to an abrupt SW. slope.
- 29.40 Top of divide ridge bet. South Fork Big Creek and Center Fork Big Creek, 250 ft. above cor., bears E. and W.; descend gradual N. slope.
- 31.20 Unimproved road, bears W., and N. 75° E. about 1.00 chs. dist., thence NE.; descend abrupt N. slope.
- 40.95 Proportionate distance; find no trace of the $\frac{1}{4}$ sec. cor. secs, 23 and 24.
- On N. slope, 100 ft. below ridge.
- Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, for restored $\frac{1}{4}$ sec. cor. secs. 23 and 24, with brass cap marked

$\frac{1}{4}$
S23 | S24
1938

- Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.
- 58.40 Large main ravine, 260 ft. below the $\frac{1}{4}$ sec. cor., drains N. 75° E., about 6.00 chs. dist., thence NE.; dense aspen timber along bottom of ravine; ascend steep SE. slope.
- 67.00 Spur, 110 ft. above ravine, projects NE.; descend abrupt general NW. slope.
- 81.70 The cor. of secs. 13, 14, 23, and 24, a sandstone, 18 x 12 x 3 ins., firmly set, marked 1 notch on E. edge and 3 notches on S. edge. Cor. has no accessories.
- At the cor. point, on general NW. slope, 230 ft. below spur.
- Set an iron post, 3 ft. long, 2 ins. in diam., 30 ins. in the ground, with the original cor. monument deposited at

DEPENDENT RESURVEY OF SUBDIVISION, T. 10 N., R. 4 E.

Chains

the base of the iron post, for cor. of secs. 13, 14, 23, and 24; with brass cap marked

T10N	R5E
S14	S13
S23	S24

1938

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of co.

Land; rolling and mountainous, with a general northerly and southerly exposure and drainage.
Soil, shallow gravel with a rocky surface; 4th rate.
Timber, clumps of aspen on portions of mile.
Undergrowth, sagebrush, service berry, weeds, and grass.
Good grazing land.

From the cor. of secs. 13, 18, 19, and 24, on the E. bdy. of the township.

N. 88°00' W., bet. secs. 13 and 24.

Descend gradually along broken S. slope of mountainous la through dense short undergrowth.

16.30 Ravine, 40 ft. below cor., drains S. 15° E., 4.00 chs. dist. to Center Fork Big Creek, which drains easterly; ascend gradual E. slope.

20.30 Top of ascent, 40 ft. above ravine, bears NW. and slopes SE. about 5.00 chs. dist. to Center Fork Big Creek; descend gradually along S. slope. From this point, the NE. cor. of fence, bears South, 5.25 chs. dist.

23.10 From this point, the SE. cor. of fence, bears S. 1°15' E. 19.06 chs. dist.

38.89 Proportionate distance; find no trace of the $\frac{1}{4}$ sec. cor. secs. 13 and 24.

On steep S. slope, 50 ft. below top of ascent.

Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, for the restored $\frac{1}{4}$ sec. cor. secs. 13 and 24, with brass cap marked

S13
$\frac{1}{4}$
S24

1938

From which

An aspen, 6 ins. diam., bears S. 44° W., 3.46 chs. dist., marked $\frac{1}{2}$ S24 BT.

No other suitable bearing tree available.

43.50 From this point, a one room log cabin belonging to Jos. F. Wilson, bears S. 7° E., 3.50 chs. dist.

44.50 From this point, the NW. cor. of a fence, bears South, 2.55 chs. dist.

DEPENDENT RESURVEY OF SUBDIVISION, T. 10 N., R. 5 E.

Chains

17.60 From this point, the SW. cor. of a fence, bears S. 1°30'E. 19.36 chs. dist.

49.00 Slope changes from a S. slope to a SW. slope.

60.40 From this point, a large spring of good clear water, in bottom of Center Fork Big Creek, bears South, 2.25 chs. dist.

64.00 The mouth of small ravine, drains S., 50 lks. dist. to its junction with Center Fork Big Creek.

66.10 Enter bottom lands of Center Fork Big Creek, 50 ft. below the 1/4 sec. cor., drains S. 85° E. from the W.; road along bottom lands, bears same; thence ascend gradually along bottom lands of canyon.

77.78 The cor. of secs. 13, 14, 23, and 24, 40 ft. above the 1/4 sec. cor.

Land, rolling and mountainous, with a general southerly and easterly exposure and drainage.

Soil, shallow clay and gravel, with a rocky surface; 4th rate.

Timber, clumps of dense aspen along bottom lands of Center Fork Big Creek.

Undergrowth, sagebrush, browse, weeds, and grass. Good grazing land.

N. 3°44' W., bet. secs. 13 and 14.

Across bottom lands Center Fork Big Creek, through dense short undergrowth.

0.50 Unimproved road, bears E. and W.

0.70 Dry wash, 20 lks. wide, 5 ft. deep, in bottom of Center Fork Big Creek Canyon, drains E.; ascend abrupt S. slope.

8.60 Ascent becomes more gradual, bears E. and W.

38.74 The 1/4 sec. cor. secs. 13 and 14, a sandstone, 14 x 12 x 8 ins., firmly set, marked 1/4 on W. face. Cor. has no accessories.

At the cor. point, on S. slope, 300 ft. above canyon.

Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, with the original cor. monument deposited alongside the iron post, for 1/4 sec. cor. secs. 13 and 14, with brass cap marked

S14 | S13

1938

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Thence, N. 0°02' E.


3.20 Top of divide ridge bet. Center Fork Big Creek and North Fork Big Creek, 50 ft. above the 1/4 sec. cor., bears N. 84° E. and S. 84° W.; road on top of ridge, bears with same; descend abrupt N. slope.

19.48 Proportionate distance; on S. bank of North Fork Big Creek,

DEPENDENT RESURVEY OF SUBDIVISION, T. 10N., R. 5 E.

Chains

Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, for the N. 1/16 sec. cor. secs. 13 and 14, with brass cap marked



1938

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

19.60 The North Fork Big Creek, stream of good clear water, 15 lks. wide, 10 ins. deep, in bottom of canyon, 380 ft. below top of divide ridge; flows E.; descend willows, birch and wild rose brush along banks of stream; ascend abrupt S. slope.


21.10 Unimproved road, bears E. and W.

23.70 Ascent becomes gradual, bears E. and W.

38.96 The cor. of secs. 11, 12, 13, and 14, a conglomerate stone, 24 x 9 x 6 ins., firmly set, marked 4 grooves on S. face and 1 groove on E. face. Cor. has no accessories.

At the cor. point, on gradual S. slope, 200 ft. above North Fork Big Creek.

Set an iron post, 3 ft. long, 2 ins. in diam., 30 ins. in the ground, with the original cor. monument deposited at the base of the post, for cor. of secs. 11, 12, 13, and 14 with brass cap marked



1938

Raise a mound of stone, 4 ft. base, 3 ft. high, W. of cor.

Land, rolling and mountainous, with a general northerly and southerly exposure and drainage.

Soil, shallow gravel and rock; 4th rate.

No timber.

Undergrowth, sagebrush, service berry, weeds, and grass; dense willows, birch, and rose brush along banks of North Fork Big Creek.

Good grazing land.

From the cor. of secs. 7, 12, 13, and 18, on the E. bdy. of the township.

N. 89°58' W., bet. secs. 12 and 13.

Ascend gradually along S. slope of rolling mountainous land, through dense short undergrowth.

14.30 Spur, 30 ft. above cor., projects SW.; descend abrupt NW. slope.

26.30 Draw, 160 ft. below spur, drains S. 20° E.; road in bottom of draw, bears N. 20° W. and S. 20° E.; ascend gradual SE. slope.

36.00 Dim road, bears NE. and S. 20° W. extend to road.

DEPENDENT RESURVEY OF SUBDIVISION, T. 10 N., R. 5 E.

Chains

.39.82 The 1/4 sec. cor. secs. 12 and 13, a sandstone, 18 x 10 x 6 ins., firmly set, marked 1/4 on N. face. Cor. has no accessories.

At the cor. point, on SE. slope, 10 ft. above draw.

Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, with the original cor. monument deposited at the base of the iron post, for 1/4 sec. cor. secs. 12 and 13, with brass cap marked

1/4 S12
S13

1938

Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.

Thence, S. 89°58' W.

17.70 Dim road, bears N. 20° W. and S. 20° E.

19.70 Spur, 130 ft. above the 1/4 sec. cor., projects SE.; descend gradual SW. slope.

22.00 Small ravine, 10 ft. below spur, drains S. 20° E., and heads N. 20° W., 5.00 chs. dist.; ascend gradually along S. slope.

35.20 Flat top of spur, 30 ft. above ravine, slopes S.; descend gradually along S. slope.

39.78 The cor. of secs. 11, 12, 13, and 14, 30 ft. below spur.

Land, rolling and mountainous, with a general southerly exposure and drainage.

Soil, shallow gravel with a rocky surface; 4th rate. No timber.

Undergrowth, sagebrush, service berry, weeds, and grass. Good grazing land.

N. 1°12' E., bet. secs. 11 and 12.

Ascend gradual S. slope of rolling mountainous land, through dense short undergrowth.

15.90 Enter flat top of wide spur, 210 ft. above cor., bears E. and W.; thence across top of spur.

20.13 Proportionate distance.

Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, for the S. 1/16 sec. cor. secs. 11 and 12, with brass cap marked

S 1/16
S11 | S12

1938

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.


27.90 Leave flat top of spur, bears E. and W.; descend gradual N. slope.

30.50 Draw, 50 ft. below spur, drains E.; ascend gradual S. slope.

DEPENDENT RESURVEY OF SUBDIVISION, T. 10N. R. 5 E.

Chains

- 37.00 Spur, 40 ft. above draw, projects E.; descend steep NE. slope.
- 39.70 Enter aspen timber, bears SE. and W.
- 40.26 Proportionate distance; find no trace of the $\frac{1}{4}$ sec. cor. secs. 11 and 12.
On steep NE. slope, 60 ft. below spur.
Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for restored $\frac{1}{4}$ sec. cor. secs. 11 and 12, with brass cap marked



From which


An aspen, 6 ins. diam., bears N. 33° W., 51 lks. dist., marked $\frac{1}{4}$ S11 BT.

No other bearing tree available.

- 54.60 Draw, 150 ft. below the $\frac{1}{4}$ sec. cor.; drains E.; dim road in bottom of draw, bears N. 60° W. and S. 60° E.; ascend steep S. slope.
- 56.70 Leave timber, bears E. and W.
- 68.90 Flat top of spur, 200 ft. above draw, slopes SE.; descend gradual N. slope.
- 77.10 Draw, 10 ft. below spur, drains SE.; thence over rolling land.
- 80.52 The cor. of secs. 1, 2, 11, and 12, a sandstone, 14 x 12 x 6 ins., firmly set, marked 5 notches on S. edge and 1 notch on E. edge. Cor. has no accessories.

At the cor. point, on rolling land.

Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, with the original cor. monument deposited at the base of the post, for cor. of secs. 1, 2, 11, and 12, with brass cap marked



1938

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor. Land, rolling and mountainous, with a general southeasterly exposure and drainage. Soil, shallow gravel with a rocky surface; 4th rate. Timber, scrub aspen on central portion of mile. Undergrowth, sagebrush, service berry, weeds, and grass. Good grazing land.

From the cor. of secs. 1, 6, 7, and 12; on the E. bdy. of the township.

DEPENDENT RESURVEY OF SUBDIVISION, T. 10 N., R. 5 E.

Chains

- S. $88^{\circ}21'$ W., bet. secs. 1 and 12.
Over gradual S. slope of rolling mountainous land, through dense short undergrowth.
- 37.90 The $\frac{1}{4}$ sec. cor. secs. 1 and 12, a sandstone, 14 x 14 x 8 ins., firmly set, marked $\frac{1}{4}$ on N. face. Cor. has no accessories.
At the cor. point, on gradual SE. slope, same level as sec. cor.
Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, with the original cor. monument deposited alongside the iron post, for $\frac{1}{4}$ sec. cor. secs. 1 and 12, with brass cap marked
- S1

S12
1938
- Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor. Thence, N. $88^{\circ}55'$ W.
- 2.10 Head of draw, 10 ft. above the sec. cor., drains SE.; ascend gradual NE. slope.
- 17.50 Spur, 120 ft. above head of draw, projects S. 10° E.; descend gradual SW. slope.
- 23.20 Ravine, 30 ft. below spur, drains S. 10° E., about 12.00 chs. dist., thence S. 60° E.; ascend gradual SE. slope.
- 32.90 Spur, 70 ft. above ravine, projects S. 30° E.; thence over rolling land.
- 39.94 The cor. of secs. 1, 2, 11, and 12.
Land, rolling and mountainous, with a general southeasterly exposure and drainage.
Soil, shallow clay and gravel, with a rocky surface; 4th rate.
No timber.
Undergrowth, sagebrush, service berry, weeds, browse, and grass.
Good grazing land.
-
- N. $1^{\circ}15'$ W., bet. secs. 1 and 2.
Ascend gradually over rolling SE. slope of mountainous land, through dense short undergrowth.
- 6.40 Top of divide ridge bet. Dry Canyon and North Fork Big Creek, 30 ft. above cor., bears E. and W.; descend gradual N. slope.
- 22.20 Bottom of Dry Canyon, 180 ft. below top of divide ridge, drains E.; unimproved road in bottom of canyon, bears E. and W.; ascend steep S. slope.
- 32.00 Spur, 230 ft. above bottom of canyon, projects S. 50° E.; descend gradual NE. slope.
- 38.00 Draw, 80 ft. below spur, drains S. 50° E.; ascend SW. slope.

DEPENDENT RESURVEY OF SUBDIVISION, T. 10 N., R. 5 E.

Chains

- 40.56 Proportionate distance; find no trace of the $\frac{1}{4}$ sec. cor.
On SW. slope, 40 ft. above draw.
Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, for restored $\frac{1}{4}$ sec. cor. secs. 1 and 2, with brass cap marked

$\frac{1}{4}$
 S2 | S1
 1938

Raise a mound of stone, 5 ft. base, 2 ft. high, W. of cor.

From this cor., a small spring of good water at the N. end of small watering trough, in bottom of Dry Canyon, bears S. $6^{\circ}10'$ E., 38.73 chs. dist.

- 52.00 Enter flat top of divide ridge bet. Dry Canyon and Old Canyon, 70 ft. above cor., bears E. and W.
60.60 Leave flat top of divide ridge, bears E. and W.; descend gradual N. slope.
73.40 Descend becomes abrupt, bears E. and W.
81.12 The cor. of secs. 1, 2, 35 and 36, on the N. bdy. of the township, 320 ft. below top of divide ridge.

Land, rolling and mountainous, with a general northerly and southerly exposure and drainage.
Soil, shallow gravel, with a rocky surface; 4th rate.
Timber, a few scrub aspen on N. portion of mile.
Undergrowth, sagebrush, service berry, browse, weeds, and grass.
Good grazing land.

From the cor. on the S. bdy. of the township, for secs. 34 and 35, T. 10 N., R. 5 E., and angle point No. 3, tract 39, T. 9 N., R. 5 E., an iron post, 3 ins. diam., set, marked and witnessed, as described in the official record of the resurvey of T. 9 N., R. 5 E., Group 33, Utah.

N. $0^{\circ}29'$ W., bet. secs. 34 and 35, T. 10 N., R. 5 E.

Descend steep N. slope of rolling mountainous land, through dense short undergrowth.

- 9.00 Draw, 50 ft. below cor., drains N. 80° E.; ascend gradual SE. slope.
14.60 Top of Thousand Dollar Ridge, 50 ft. above draw, bears N. 70° E. and W.; unimproved road on top of ridge, bears with same; descend gradual N. slope.
23.80 Draw, 210 ft. below ridge, drains N. 70° E.; ascend gradual SE. slope.
39.40 Spur, 30 ft. above draw, projects NE.; descend gradual N. slope.
39.05 Proportionate point, find no trace of the $\frac{1}{4}$ sec. cor. secs. 34 and 35.
On gradual N. slope, 20 ft. below spur.

DEPENDENT RESURVEY OF SUBDIVISION, T. 10 N., R. 5 E.

Chains

Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, for the restored $\frac{1}{4}$ sec. cor. secs. 34 and 35, with brass cap marked



Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

44.20 Enter dense timber, bears NE. and SW.

44.60 Small ravine, 60 ft. below the $\frac{1}{4}$ sec. cor., drains N. 30° E.; ascend gradual SE. slope.

50.10 Top of ascent, 20 ft. above ravine, slopes NE. and bears SW.; descend abrupt NE. slope.


60.70 Small stream of good clear water, 2 lks. wide, 1 in. deep, in bottom of large ravine, 180 ft. below top of ascent, flows E.; leave timber, bears E. and W.

71.40 Spur, 60 ft. above ravine, projects E.; descend steep N. slope.

78.10 The cor. of secs. 26, 27, 34, and 35, a sandstone, 18 x 12 x 10 ins., firmly set in the ground and small mound of stone, marked 1 notch on S. edge and 2 notches on E. edge. Cor. has no accessories.

At the cor. point, on steep N. slope, 90 ft. below spur.

Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, with the original cor. monument deposited at the base of the post, for cor. of secs. 26, 27, 34, and 35, with brass cap marked



From which

A lone balsam, 3 ins. diam., bears N. 76°45' W., 147 lks. dist., marked T10N R5E S27 BT.

Land, rolling and mountainous, with a general southerly and northerly exposure and drainage.

Soil, shallow gravel, with a rocky surface; 4th rate.

Timber, dense scrub aspen on portion of mile.

Undergrowth, sagebrush, service berry, weeds, and grass.

Good grazing land.

From the cor. of secs. 25, 26, 35, and 36.

S. 89°07' W., bet. secs. 26 and 35.

Descend gradual NW. slope of rolling mountainous land, through dense short undergrowth.

44.00 Head of ravine, 20 ft. below cor., drains N.; ascend gradual E. slope.

DEPENDENT RESURVEY OF SUBDIVISION, T. 10 N., R. 5 E.

Chains	
20.00	Spur, 30 ft. above head of ravine, projects N.; descend abrupt W. slope.
35.40	Unimproved road, bears N. 10° E., and S. about 5.00 chs. dist. to end.
36.80	Small stream of good clear water, 1 lk. wide, 2 ins. deep in bottom of large main draw, 290 ft. below spur, flows N. 10° E.; ascend abrupt E. slope.
39.96	Proportionate distance; find no trace of the $\frac{1}{4}$ sec. cor. secs. 26 and 35. On steep E. slope, 50 ft. above stream. Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, for restored $\frac{1}{4}$ sec. cor. secs. 26 and 35, with brass cap marked
	$\begin{array}{r} S26 \\ \hline S35 \\ 1938 \end{array}$
	Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.
51.30	From this point, the SW. cor. of a fence, bears N. 46° 45' about 22.00 chs. dist. The NW. cor. of same fence, bears N. 26° E., about 55.00 chs. dist.
53.00	Spur, 210 ft. above the $\frac{1}{4}$ sec. cor., projects NE., and bears S. 70° W.; thence along steep N. slope.
68.70	Enter the SE. point of a large grove as aspen timber, bears NW. and SE.
77.30	Leave timber, bears NW. and S.
79.92	The cor. of secs. 26, 27, 34, and 35, 20 ft. below spur. Land, rolling and mountainous, with a general northerly exposure and drainage. Soil, shallow gravel with a rocky surface; 4th rate. Timber, dense scrub aspen on W. portion of mile. Undergrowth, sagebrush, service berry, weeds, and grass. Good grazing land.
	N. 2° 10' E., bet. secs. 26 and 27.
	Descend abrupt rocky N. slope of rolling mountainous land, through dense short undergrowth.
10.20	The South Fork Big Creek, stream of good clear water, 15 lks. wide, 10 ins. deep, in bottom of deep narrow canyon, 300 ft. below cor., flows E.; ascend steep ledgy S. slope.
13.30	Top of a quartzite outcropping, bears NW. and SE.
26.10	Ascent becomes gradual, bears E. and W.
37.00	Spur, 380 ft. above stream, projects S. 60° E.; descend gradual NE. slope.
41.04	Proportionate distance; find no trace of the $\frac{1}{4}$ sec. cor. secs. 26 and 27.

DEPENDENT RESURVEY OF SUBDIVISION, T. 10 N., R. 5 E.

Chains

On gradual NE. slope, at head of swale, 20 ft. below spur, drains S. 60° E., and at the E. edge of clump of dense aspen and willows.

Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, for the restored cor. of secs. 26 and 27, with brass cap marked

S27	S26
-----	-----

1938

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Ascend gradual SE. slope.

- 57.50 Spur, 70 ft. above the 1 sec. cor., projects E.; descend gradual N. slope.
- 67.20 Enter dense aspen timber, bears E. and W.
- 68.00 Ravine, 110 ft. below spur, drains E.; ascend gradual S. slope.
- 69.00 Leave aspen timber, bears N. 80° W. and E.
- 78.80 Spur, 100 ft. above ravine, projects SE.; descend gradual NE. slope.
- 82.08 The cor. of secs. 22, 23, 26, and 27, a sandstone, 20 x 12 x 5 ins., firmly set in the ground and small mound of stone, marked 2 grooves on E. and S. faces. Cor. has no accessories.
- At the cor. point, on gradual NE. slope, 10 ft. below spur.
- Set an iron post, 3 ft. long, 2 ins. in diam., 30 ins. in the ground, with the original cor. monument deposited at the base of the post, for cor. of secs. 22, 23, 26, and 27, with brass cap marked

T10N	R5E
S22	S23

S27	S26
-----	-----

1938

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Land, rolling and mountainous, with a general southeasterly exposure and drainage.

Soil, shallow gravel and clay, with a rocky surface; 4th rate.

Timber, dense aspen on portion of mile.

Undergrowth, sagebrush, service berry, weeds, and grass; dense willows and birch along bottom lands of South Fork Big Creek.

Good grazing land.

From the cor. of secs. 23, 24, 25, and 26.

N. 89°39' W., bet. secs. 23 and 26.

Descend gradually along S. slope of rolling mountainous land; through dense short undergrowth.

DEPENDENT RESURVEY OF SUBDIVISION, T. 10 N., R. 5 E.

Chains	
4.30	Junction of ravine, 10 ft. below cor., drain S. 10° E. from N. 10° W. and NW.; ascend steep NE. slope.
12.60	The S. edge of two large sink holes.
20.10	Spur, 140 ft. above junction of ravine, projects S. 20° E. descend abrupt SW. slope.
39.40	Proportionate distance; find no trace of the $\frac{1}{4}$ sec. cor. secs. 23 and 26. On abrupt SW. slope, near bottom of ravine, 70 ft. below spur. Set an iron post, 7 ft. long, 1 in. in diam., 30 ins. in the ground, for the restered $\frac{1}{4}$ sec. cor. secs. 23 and 26, with brass cap marked
	$\frac{1}{4} \frac{S23}{S26}$
	1938
	Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.
42.00	Ravine, 50 ft. below the $\frac{1}{4}$ sec. cor., drains S. 10° E.; ascend steep E. slope.
47.30	Top of ledgy spur, 110 ft. above ravine, projects S., about 10.00 chs. dist. to end; descend gradually along broken SW. slope.
57.00	Ravine, 110 ft. below spur, drains SE.; small seep of good water in bottom of ravine; ascend abrupt NE. slope through dense timber.
58.90	Small spring of good water, bears North, 3.50 chs. dist.
63.40	Leave timber, bears NE. and S.
69.50	Enter dense aspen timber, bears N. and SE.
75.10	Leave aspen timber, bears N. and SE.
78.80	The cor. of secs. 22, 23, 26, and 27, 270 ft. above ravine. Land, rolling and mountainous, with a general southeasterly exposure and drainage. Soil, shallow gravel and clay, with a rocky surface; 4th rate. Timber, clumps of dense aspen on W. portion of mile. Undergrowth, sagebrush, service berry, scrub dwarf timber, browse, weeds, and grass. Good grazing land.
	N. 0°28' E., bet. secs. 22 and 23.
	Descend gradual NE. slope of high mountainous land, through dense short undergrowth.
4.10	Enter dense aspen timber, bears NE. and NW.
8.20	Small ravine, 60 ft. below cor., drains SE.; ascend gradual S. slope.
10.60	Low spur, 30 ft. above ravine, projects SE.; descend gradual NE. slope.

DEPENDENT RESURVEY OF SUBDIVISION, T. 10 N., R. 5 E.

Chains

15.10 Ravine; 60 ft. below spur, drains SE.; ascend gradual S. slope.

16.10 Leave timber, bears NW. and SE.

21.30 Rolling top of spur, 80 ft. above ravine, projects SE.; descend gradual NE. slope.

30.10 Small ravine, 10 ft. below spur, drains SE.; aspen timber along bottom of ravine; ascend steep S. slope.

40.55 Proportionate distance; find no trace of the $\frac{1}{4}$ sec. cor. secs. 22 and 23.

On steep S. slope, 150 ft. above ravine.

Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, for the restored $\frac{1}{4}$ sec. cor. of secs. 22 and 23, with brass cap marked

	$\frac{1}{4}$	
S22		S23
1938		

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

42.90 Ascent becomes gradual, bears E. and W.

46.50 Top of divide ridge bet. South Fork Big Creek and Center Fork Big Creek, 40 ft. above the $\frac{1}{4}$ sec. cor., bears E. and W.; unimproved road on top of ridge, bears with same; descend gradual N. slope.

56.50 Enter dense aspen timber, bears NW. and SE.

61.30 Leave timber, bears NW. and SE.

66.20 Ravine, 260 ft. below top of divide ridge, drains NE. from S. 80° W.; ascend gradual SE. slope.

81.10 The cor. of secs. 14, 15, 22, and 23, a sandstone, 18 x 12 x 6 ins., loosely set in the ground and small mound of stone, marked 2 notches on E. edge and 4 notches on S. edge. Cor. has no accessories.

At the cor. point, on top of spur, 80 ft. above ravine, slopes N. 80° E.

Set an iron post, 3 ft. long, 2 ins. in diam., 30 ins. in the ground, with the original cor. monument deposited at the base of the post, for cor. of secs. 14, 15, 22, and 23, with brass cap marked

T10N	R5E	
S15		S14
S22		S23

1938

wings 10 mottou of Spur
Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Land, rolling and mountainous, with a general southeasterly and northeasterly exposure and drainage.

Soil, shallow clay and gravel, with a rocky surface, 4th rate.

Timber, clumps of dense aspen on portions of mile.

Undergrowth, sagebrush, service berry, mahogany and weeds.

Good grazing land.

DEPENDENT RESURVEY OF SUBDIVISION, T. 10 N. R. 5 E.

Chains	From the cor. of secs. 13, 14, 23, and 24, S. 89°32' W., bet. secs. 14 and 23.
	Ascend gradually along S. side of Center Fork Big Creek, through dense short undergrowth.
8.80	Mouth of ravine from the SW., drains NE., about 3.50 chs. dist. to its junction with Center Fork Big Creek; ascend NE. slope.
20.00	Spur, 160 ft. above cor., projects NE.; descend gradually over NW. slope.
36.00	Ravine, 80 ft. below spur, drains NE.; ascend general E. slope.
39.59	The $\frac{1}{4}$ sec. cor. secs. 14 and 23; a sandstone, 18 x 12 x 4 ins., firmly set, marked $\frac{1}{4}$ on N. face. Cor. has no accessories.
	At the cor. point, on general E. slope, 40 ft. above ravine
	Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, with the original cor. monument deposited at the base of the post, for $\frac{1}{4}$ sec. cor. secs. 14 and 23, with brass cap marked
	$\begin{array}{r} S14 \\ \frac{1}{4} \\ \hline S23 \end{array}$
	1938
	Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.
	Thence, N. 89°49' W.
5.40	Slope changes from a gradual E. slope to a gradual SE. slope.
39.71	The cor. of secs. 14, 15, 22, and 23, 200 ft. above the $\frac{1}{4}$ sec. cor.
	Land, rolling and mountainous, with a general northeasterly and southeasterly exposure and drainage.
	Soil, shallow clay and gravel, with a rocky surface; 4th rate.
	Timber, clumps of aspen on E. portion of mile.
	Undergrowth, sagebrush, service berry, weeds, and grass.
	Good grazing land.
	N. 4°06' W., bet. secs. 14 and 15.
	Descend gradual N. slope of rolling mountainous land, through dense short undergrowth and scattered clumps of dense aspen timber.
15.20	Dry channel of Center Fork Big Creek, in canyon, 270 ft. below cor., drains E. Unimproved road in bottom of canyon, bears E. and W.; ascend abrupt S. slope.
19.64	Proportionate distance.
	Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground and mound of stone, for the S. 1/16 sec. cor. secs. 14 and 15, with brass cap marked

DEPENDENT RESURVEY OF SUBDIVISION, T. 10 N., R. 5 E.

Chains

S 1/16

S15 | S14

1938

Deposit a sandstone, 8 x 8 x 6 ins., marked X, at the base of the post.

37.60 Top of divide ridge bet. Center Fork Big Creek and North Fork Big Creek, 340 ft. above the bottom of Center Fork, bears N. 80° W. and E.; descend abrupt N. slope.

38.10 Unimproved road, bears N. 80° W. and S. 30° E.

39.28 The 1/4 sec. cor. secs. 14 and 15, a sandstone, 12 x 10 x 4 ins., firmly set, marked 1/4 on W. face. Cor. has no accessories.

At the cor. point, on N. slope, 20 ft. below top of divide ridge.

Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, with the original cor. monument deposited at the base of the post, for the 1/4 sec. cor. secs. 14 and 15, with brass cap marked

1/4

S15 | S14

1938

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor. Thence, N. 0°50' E.

2.90 From this point, the SW. cor. of fence, bears East, 10.00 chs. dist.

10.70 Enter dense timber, bears E. and SW.

19.56 Proportionate distance.

Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground and in a mound of stone, for the N. 1/16 sec. cor. secs. 14 and 15, with brass cap marked

N 1/16

S15 | S14

1938

Deposit a sandstone, 10 x 8 x 6 ins., marked X, at the base of the post.

24.00 North Fork Big Creek, stream of good clear water, 15 lks. wide, 10 ins. deep, in bottom of canyon, 430 ft. below the 1/4 sec. cor., flows E. Dense growth of willows and birch along banks of stream; ascend abrupt S. slope.

24.50 Unimproved road, bears E. and W.

28.10 From this point, the NW. cor. of Edwin T. Pope's 2 room log cabin, bears S. 44°15' E., 3.20 chs. dist. The NW. cor. of a fence, bears S. 44°15' E., 3.00 chs. dist.

39.12 The cor. of secs. 10, 11, 14, and 15, a sandstone, 36 x 9 x 6 ins., firmly set in the ground and mound of stone, marked 2 notches on E. and four notches on S. edges.

DEPENDENT RESURVEY OF SUBDIVISION, T. 10 N., R. 5 E.

Chains

Cor. has no accessories.

At the cor. point, on general S. slope, 220 ft. above creek.

Set an iron post, 3 ft. long, 2 ins. in diam., 30 ins. in the ground, with the original cor. monument deposited at the base of the post, for cor. of secs. 10, 11, 14, and 15 with brass cap marked

T10N R5E
S10 | S11

S15 | S14

1938.

Raise a mound of stone, 3 ft. base, .2 ft. high, W. of cor.

From this cor., the SE. cor. of a fence, bears S. 28°10' E. 40.88 chs. dist.

Land, rolling and mountainous, with a general southerly and northerly exposure and drainage. Soil, shallow clay and gravel, with a rocky surface; 4th rate.

Timber, aspen and balsam on central portion of mile. Undergrowth, sagebrush, service berry, mahogany, willows, oak, browse, weeds, and grass. Good grazing land.

From the cor. of secs. 11, 12, 13, and 14.

S. 88°50' W., bet. secs. 11 and 14.

Over rolling S. slope of mountainous land, through dense short undergrowth.

5.80 Slope changes from a gradual S. slope to a gradual E. slope

15.30 Spur, 20 ft. above cor., projects S.; descend gradual W. slope.

21.10 Ravine, 70 ft. below spur, drains S., 5.00 chs. dist., then SE.; enter grove of aspen timber, bears N. and S.; ascend gradual E. slope.

25.80 Leave timber, bears N. and S.

28.90 Spur, 80 ft. above ravine, projects S., 5.00 chs. dist., thence SE.; thence ascend gradual SE. slope.

39.63 The 1/4 sec. cor. secs. 11 and 14, a sandstone, 10 x 10 x 2 ins., loosely set, marked 1/4 on N. face. Cor. has no accessories.

At the cor. point, on SE. slope, 75 ft. above spur.

Set an iron post, 3 ft. long, 1 in. in diam., 20 ins. in the ground to solid rock and in a large mound of stone, with the original cor. monument deposited at the base of the post, for 1/4 sec. cor. secs. 11 and 14, with brass cap marked.

S11

S14

1938

SI.

DEPENDENT RESURVEY OF SUBDIVISION, T. 10 N., R. 5 E.

Chains

Thence, N. 88°00' W.

- 6.50 Spur, 20 ft. above the $\frac{1}{4}$ sec. cor., projects SE.; descend gradual SW. slope.
- 22.90 Draw, 150 ft. below spur, drains S.; ascend gradual E. slope.
- 25.00 Spur, 40 ft. above draw, projects S., 4.00 chs. dist. to end; descend gradual SW. slope.
- 28.00 Ravine, 30 ft. below spur, drains S. 30° E.; ascend gradual NE. slope.
- 31.50 Ascent becomes more gradual, bears NW. and SE.
- 34.50 Spur, 40 ft. above ravine, projects S. 30° E.; thence ascend gradually along SE. slope.
- 39.49 The cor. of secs. 10, 11, 14, and 15.

Land, rolling and mountainous, with a general southeasterly exposure and drainage.
 Soil, shallow gravel and clay, with a rocky surface; 4th rate.
 Timber, a few clumps of dense aspen.
 Undergrowth, sagebrush, service berry, weeds, and grass.
 Good grazing land.

N. 89°58' W., bet. secs. 10 and 15.

Ascend gradual SE. slope of rolling mountainous land, through dense short undergrowth.

- 7.50 Spur, 50 ft. above cor., slopes S. 20° E., 3.00 chs. dist., thence S.; descend gradual W. slope.
- 9.24 From this point, a mound of stone, 3 ft. base, 2 ft. high, in which is set an angle iron about 3 ft. long, bears South, 1.48 chs. dist.

13.00 Ravine, 40 ft. below spur, drains S. 30° E.; ascend gradual SE. slope.

19.91 Proportionate distance.

Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground to solid rock and in a large mound of stone, for the E. $\frac{1}{16}$ sec. cor. secs. 10 and 15, with brass cap marked

E $\frac{1}{16}$ $\frac{S10}{S15}$

1938

Deposit a sandstone, 10 x 10 x 6 ins., marked X, at the base of the post.

- 28.90 Spur, 90 ft. above ravine, projects S. 20° E.; descend abrupt SW. slope.
- 38.40 Draw, 200 ft. below spur, drains SW., about 5.00 chs. dist. to junction with hollow draining southerly; continue descent.
- 39.82 The $\frac{1}{4}$ sec. cor. secs. 10 and 15, a sandstone, 18 x 4 x 6 ins., loosely set, marked $\frac{1}{4}$ on N. face. Cor. has no accessories.

DEPENDENT RESURVEY OF SUBDIVISION, T. 10 N., R. 5 E.

Chains

At the cor. point.

Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, with the original cor. monument deposited at the base of the post, for 1/4 sec. cor. secs. 10 and 15, with brass cap marked

S10

1/4

S15

1938.

From which

An aspen, 10 ins. diam., bears S. 89° W., 343 lks. dist., marked 1/4 S15, BT.

An aspen, 8 ins. diam., bears N. 87°30' W., 352 lks. dist., marked 1/4 S10 BT.

From this cor., a large spring of good clear water, bears N. 60° W., 2.10 chs. dist. Spring is in bottom of hollow draining southerly.

Land, rolling and mountainous, with a general southeasterly exposure and drainage.

Soil, shallow clay and gravel, with a rocky surface; 4th rate.

Timber, none.

Undergrowth, sagebrush, service berry, weeds, and grass.

From the cor. of secs. 10, 11, 14, and 15.

N. 0°16' E., bet. secs. 10 and 11.

Ascend gradual SE. slope of rolling mountainous land, through dense, short undergrowth,

5.40 Spur, 50 ft. above sec. cor., projects S. 30° E.; enter dense aspen timber, bears NW. and SE.; descend NE. slope.

14.40 Ravine, 50 ft. below spur, drains S. 30° E.; leave timber, bears NW. and SE.; ascend gradual SW. slope.

20.22 Proportionate distance.

Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground and mound of stone, for the S. 1/16 sec. cor. secs. 10 and 11, with brass cap marked

S 1/16

S10 | S11

1938

Deposit a sandstone, 6 x 6 x 4 ins., marked X, at base of post.

24.90 Sandstone outcropping, bears NW. and SE.

39.00 Spur, 260 ft. above ravine, projects S. 60° E.; thence along E. slope.

40.44 The 1/4 sec. cor. secs. 10 and 11, a sandstone, 18 x 12 x 6 ins., firmly set, marked 1/4 on W. face. Cor. has no accessories.

At the cor. point.

DEPENDENT RESURVEY OF SUBDIVISION T. 10 N., R. 5 E.

Chains

Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, with the original cor. monument deposited at the base of the post, for $\frac{1}{4}$ sec. cor. secs. 10 and 11, with brass cap marked

S10	S11
-----	-----

1938

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.
Thence, N. $1^{\circ}03'$ E.

- 9.20 Ridge, same level as spur, bears N. 80° E. and S. 80° W.;
dip road on top of ridge, bears with same; descend
gradual N. slope.
- 14.50 Enter dense aspen, bears SW. and E.
- 17.50 Leave aspen, bears SW. and SE.
- 21.40 Draw, 120 ft. below ridge, drains NE., 4.00 chs. dist.,
thence northerly; ascend gradual S. slope.
- 24.40 Spur, 20 ft. above draw, projects E., 4.50 chs. dist. to
end; descend gradual N. slope.
- 27.40 Enter dense timber, bears E. and W.
- 28.40 Draw, 50 ft. below spur, drains E.; dip road in bottom of
draw, bears E. and W.; ascend gradual SW. slope.
- 30.10 Leave aspen timber, bears NW. and E.
- 34.40 Spur, 100 ft. above draw, projects SE., about 8.00 chs.
dist. to end; ascend gradually along general E. slope.
- 40.01 Find no trace of the cor. of secs. 2, 3, 10, and 11; point
for cor. is established at record distances from the cor.
of secs. 1, 2, 11, and 12, and the $\frac{1}{4}$ sec. cor. of secs. 10
and 11.
- At the cor. point, on general E. slope, 30 ft. above spur.
Set an iron post, 3 ft. long, 2 ins. in diam., 30 ins. in
the ground, for the restored cor. of secs. 2, 3, 10, and 11,
with brass cap marked

T10N	R5E
------	-----

S3	S2
----	----

S10	S11
-----	-----

1938

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Land, rolling and mountainous, with a general southeasterly
exposure and drainage.

Soil, shallow clay and gravel; 4th rate.

Timber, scattered clumps of dense aspen on portions of
mile.

Undergrowth, sagebrush, service berry, browse, weeds, and
grass.

Good grazing land.

DEPENDENT RESURVEY OF SUBDIVISION, T. 10 N., R. 5 E.

Chains	
	From the cor. of secs. 1, 2, 11, and 12. N. 89°38' W.; bet. secs. 2 and 11. Ascend gradual SE. slope of rolling mountainous land, through dense short undergrowth.
4.00	Head of draw, drains S. 60° E.; continue ascent.
16.00	Spur, 110 ft. above cor., projects SE.; descend gradual SW. slope.
22.30	Head of ravine, 30 ft. below spur, drains SE.; ascend gradual NE. slope.
31.00	Forks of spur, 100 ft. above head of ravine, projects S. 70° W. and S. 20° E.; descend gradual NW. slope.
40.00	Record distance; find no trace of the $\frac{1}{4}$ sec. cor. set for secs. 2 and 11. On NW. slope, 60 ft. below spur. Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, for the restored $\frac{1}{4}$ sec. cor. secs. 2 and 11, with brass cap marked
	$\begin{array}{r} S2 \\ \frac{1}{4} \text{ ---} \\ S11 \end{array}$
	1938.
	Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.
50.40	Ravine, 130 ft. below cor., drains S. 10° E.; dim road in bottom of ravine, bears N. and S. 10° E.; ascend gradual E. slope.
54.10	Enter clump of dense aspen timber, bears N. and S.
56.10	Leave timber, bears N. and S.
70.00	Spur, 180 ft. above ravine, projects S. 10° E.; descend gradual SW. slope.
77.60	Ravine, 50 ft. below spur, drains S.; small clump of aspen in bottom of ravine; ascend gradual E. slope.
80.00	The cor. of secs. 2, 3, 10, and 11, 110 ft. above ravine. Land, rolling and mountainous, with a general southeasterly exposure and drainage. Soil, shallow clay and sand, with a gravelly surface; 4th rate. Undergrowth, sagebrush, service berry, weeds, and grass. Timber; clumps of dense aspen on portions of mile. Good grazing land.
	From the cor. of secs. 33 and 34, on the S. bdy. of the township, an iron post, 3 ins. diam., set, marked and witnessed, as described in the official record of the resurvey of T. 9 N., R. 5 E., Group 33, Utah. N. 0°13' E., bet. secs. 33 and 34. Ascend gradual S. slope of rolling mountainous land, through dense timber and short undergrowth.


DEPENDENT RESURVEY OF SUBDIVISION, T. 10 N., R. 5 E.

Chains

- 1.00 Spur, 10 ft. above cor., projects W.; descend gradual NW. slope.
- 9.00 Head of draw, 30 ft. below spur, drains W.; ascend gradual S. slope.
- 15.20 Spur, 10 ft. above head of draw, projects S. 80° W.; descend gradual N. slope.
- 22.90 Enter clump of dense aspen, bears W. and SE.
- 25.80 Leave aspen, bears E. and W.
- 26.80 Draw, 110 ft. below spur, drains W.; small spring of good water in bottom of draw, bears East, 1.40 chs. dist.; ascend gradual S. slope.
- 27.30 Unimproved road, bears N. 80° W. and N. 80° E.
- 38.96 Proportionate distance; find no trace of the $\frac{1}{4}$ sec. cor. secs. 33 and 34.

On gradual S. slope, 110 ft. above draw:


Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, for the restored $\frac{1}{4}$ sec. cor. secs. 33 and 34, with brass cap marked



- Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.
- 47.10 Rolling top of ridge, 40 ft. above the $\frac{1}{4}$ sec. cor., bears E. and W.; descend gradual NE. slope.
- 65.50 Descent becomes abrupt, bears E. and W.; enter dense oak and mahogany, bears same.
- 72.50 Ravine, 230 ft. below ridge, drains NW., 4.00 chs. dist., thence northerly; descend gradual NW. slope.
- 77.92 The cor. of secs. 27, 28, 33, and 34, a quartzite, 20 x 10 x 5 ins., firmly set in the ground and mound of stone, marked 1 notch on S. edge and 3 notches on E. edge. Cor. has no accessories.

At the cor. point, on NW. slope, 50 ft. below ravine.

Set an iron post, 3 ft. long, 2 ins. in diam., 30 ins. in the ground, with the original cor. monument deposited at the base of the post, for cor. of secs. 27, 28, 33, and 34, with brass cap marked



Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Land, rolling and mountainous, with a general westerly and northwesterly exposure and drainage. Soil, shallow clay and gravel, with a rocky surface; 4th rate.

DEPENDENT RESURVEY OF SUBDIVISION, T. 10 N., R. 5 E.

Chains	Timber, clumps of dense aspen on S. portion of mile. Undergrowth, sagebrush, service berry, mahogany, weeds, and grass. Good grazing land.
	From the cor. of secs. 26, 27, 34, and 35. N. 88°21' W., bet. secs. 27 and 34. Ascend gradually along steep N. slope of mountainous land, through dense undergrowth.
6.60	Enter dense aspen timber, bears NE. and SE.
9.60	Leave timber, bears N. and S.
17.20	Spur, 70 ft. above sec. cor., slopes N.; descend gradual NW. slope.
33.10	Small ravine, 40 ft. below spur, drains NE.; ascend gradual E. slope.
39.77	The $\frac{1}{4}$ sec. cor. secs. 27 and 34, a sandstone, 14 x 12 x 5 ins.; firmly set, marked $\frac{1}{4}$ on N. face. Cor. has no accessories. At the cor. point, on gradual E. slope, 90 ft. above ravine Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, with the original cor. monument deposited at the base of the post, for $\frac{1}{4}$ sec. cor. secs. 27 and 34, with brass cap marked $\begin{array}{r} S27 \\ \frac{1}{4} \\ \hline S34 \end{array}$ 1938
	Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor. Thence, S. 89°48' W.
1.60	Spur, 10 ft. above the $\frac{1}{4}$ sec. cor., projects N. 10° E.; descend gradually along N. slope.
6.80	Enter dense aspen timber, bears N. and S.
18.10	Head of ravine, 40 ft. below spur, drains NE., about 8.00 chs. dist., thence N.; ascend gradual NE. slope.
21.90	Leave timber, bears N. and S.
34.60	Spur, 160 ft. above head of ravine, projects NE.; descend steep N. slope.
39.03	The cor. of secs. 27, 28, 33, and 34, 160 ft. below spur. Land, rough and mountainous, with a general northerly exposure and drainage into South Fork Big Creek. Soil, shallow gravel and clay, with a rocky surface; 4th rate. Timber, scattered clumps of aspen. Undergrowth, sagebrush, service berry, mountain laurel, mahogany, weeds, and grass. Good grazing land.

DEPENDENT RESURVEY OF SUBDIVISION, T. 10 N., R. 5 E.

Chains	
	N. 1°25' E., bet. secs. 27 and 28.
	Descend steep N. slope of broken mountainous land, through dense undergrowth.
9.10	South Fork Big Creek, stream of good clear water, 15 lks. wide, 20 ins. deep, in bottom of deep narrow canyon, 140 ft. below cor., flows N. 70° E.; ascend abrupt SE. slope.
16.40	Spur, 140 ft. above stream, slopes E., about 6.00 chs. dist., to end; descend abrupt NE. slope.
19.80	Ravine, 50 ft. below spur, drains S. 60° E.; ascend abrupt ledgy SW. slope, through dense mahogany.
25.50	Ascent becomes more gradual, bears SW. and NE.
38.00	Top of ascent, 300 ft. above ravine, bears SW. and NE.; descend abrupt ledgy NW. slope.
41.11	Proportionate distance; find no trace of the $\frac{1}{4}$ sec. cor. secs. 27 and 28.
	On ledgy NW. slope, 50 ft. below top of ascent.
	Set an iron post, 3 ft. long, 1 in. diam., 20 ins. in the ground to solid rock and in a mound of stone, for the restored $\frac{1}{4}$ sec. cor. secs. 27 and 28, with brass cap marked
	$\frac{1}{4}$ S28 S27 1938
	Deposit a quartzite, 15 x 12 x 10 ins., marked X, at the base of the post.
	From this cor., the $\frac{1}{4}$ sec. cor. set for secs. 28 and 29, by J.H. Martineau, U.S. Deputy Surveyor, in 1878, bears N. 85°45' W., 14.86 chs. dist.
47.40	Bend in ravine, 70 ft. below the $\frac{1}{4}$ sec. cor., drains SW. from the NW.; ascend gradual SW. slope.
52.30	Top of ascent, 70 ft. above ravine, slopes SW., 2.00 chs. dist. to ravine; descend gradual NW. slope.
57.00	Ravine, 40 ft. below top of ascent, drains SW.; ascend gradual SE. slope.
63.50	Flat top of spur, 60 ft. above ravine, projects E., 4.00 chs. dist. to end; descend gradual N. slope.
68.50	Draw, 30 ft. below spur, drains E.; ascend gradual SW. slope.
82.22	The cor. of secs. 21, 22, 27, and 28, a sandstone, 15 x 14 x 3 ins., firmly set in the ground and small mound of stone, marked 3 notches on E. and 2 notches on S. edges. Cor. has no accessories.
	At the cor. point, on general SW. slope, 80 ft. above draw.
	Set an iron post, 3 ft. long, 2 ins. in diam., 30 ins. in the ground, with the original cor. monument deposited at the base of the post, for cor. of secs. 21, 22, 27, and 28, with brass cap marked

DEPENDENT RESURVEY OF SUBDIVISION T. 10 N., R. 5 E.

Chains

T10N	R5E
S21	S22
S28	S27

1938

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Land, rough and mountainous, with a general southerly exposure and drainage.

Soil, shallow gravel and clay with a rocky surface; 4th rate.

No timber.

Undergrowth, sagebrush, mahogany, service berry, weeds, and grass.

Good grazing land.

From the cor. of secs. 22, 23, 26, and 27.

N. $89^{\circ}12'$ W., bet. secs. 22 and 27.

Ascend gradual N. slope of rolling mountainous land, through dense short undergrowth.

5.00 Spur, 30 ft. above cor., projects SE.; thence ascend gradually along SE. slope.

27.50 Top of ascent, 30 ft. above spur, bears N. and S.; descend over rolling S. slope.

34.60 Ravine, 10 ft. below top of ascent, drains S. 20° W.; dense aspen timber along bottom of ravine; ascend gradual E. slope.

39.50 The N. edge of sink hole.

39.66 The $\frac{1}{4}$ sec. cor. of secs. 22 and 27, a sandstone, 14 x 10 x $\frac{3}{4}$ ins., firmly set, marked $\frac{1}{4}$ on N. face. Cor. has no accessories.

At the cor. point, on gradual E. slope, 70 ft. above ravine

Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, with the original cor. monument deposited at the base of the post, for $\frac{1}{4}$ sec. cor. secs. 22 and 27, with brass cap marked

S22

S27

1938

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Thence, N. $99^{\circ}02'$ W.

11.00 Rolling top of spur, 20 ft. above the $\frac{1}{4}$ sec. cor., projects S. 20° W.; descend gradual NW. slope.

17.40 Dix road, bears NE. and S. 20° W.

18.00 Descent becomes more abrupt, bears NE. and SW.

24.50 Draw, 80 ft. below spur, drains S.; ascend gradually over rolling E. slope.

DEPENDENT RESURVEY OF SUBDIVISION, T. 10 N., R. 5 E.

Chains

- 32.60 Slope changes from a gradual E. slope to a gradual SE. slope.
- 37.10 Spur, 60 ft. above draw, projects SE.; descend gradually.
- 40.10 The cor. of secs. 21, 22, 27, and 28, 10 ft. below spur.
Land, rolling and mountainous, with a general southerly exposure and drainage.
Soil, shallow clay and gravel, with a rocky surface; 4th rate.
Timber, a clump of dense aspen on E. portion of mile.
Undergrowth, sagebrush, service berry, weeds, and grass.
Good grazing land.
-
- West, bet. secs. 21 and 28.
Descend gradual SW. slope of rolling mountainous land, through dense short undergrowth.
- 6.50 Draw, 50 ft. below cor., drains S. 30° E.; clump of dense aspen timber and W. side of draw; ascend gradual E. slope.
- 15.03 Fall 28 lks. S. of the cor. set for secs. 20, 21, 22, and 29, by J.H. Martineau, U.S. Deputy Surveyor, in 1878, which is a sandstone, 21 x 8 x 2 ins., firmly set in the ground and small mound of stone, marked 4 notches on E. edge and 2 notches on S. edge. Cbr. has no accessories. I efface the marks on the cor. monument.
- 16.00 Spur, 40 ft. above draw, projects SE.; thence ascend gradually along SE. slope.
- 19.80 Spur, 60 ft. above draw, projects S.; descend gradual SW. slope.
- 29.70 Head of draw, 50 ft. below spur, drains S. 20° E.; 4 large sink holes at head of draw; ascend gradual SE. slope.
- 35.80 Dim road, bears NE. and SW.
- 38.00 Spur, 30 ft. above head of draw, projects S., about 10.00 chs. dist. to end; descend gradual SW. slope.
- 40.00 Record course and distance; find no trace of the 4 sec. cor. set for secs. 21 and 28.
On gradual SW. slope, 10 ft. below top of spur.
Set an iron post, 3 ft. long; 1 in. in diam., 30 ins. in the ground, for the restored 4 sec. cor. sec. 28 only, with brass cap marked
- 328
- 1938
- Raise a mound of stone, 3 ft. base, 2 ft. high, S. of cor.
Land, rolling and mountainous, with a general southerly exposure and drainage.
Soil, shallow gravel and clay, with a rocky surface; 4th rate.
Timber, a clump of dense aspen on E. portion of half mile.
Undergrowth, sagebrush, weeds, and grass.
Good grazing land.

DEPENDENT RESURVEY OF SUBDIVISION, T. 10 N., R. 5 E.

Chains

From the cor. of secs. 21, 22, 27, and 28.

N. 0°29' E., bet. secs. 21 and 22.

Ascend gradual SW. slope of rolling mountainous land, through dense short undergrowth.

8.70 Spur, 10 ft. above cor., projects E., about 10.00 chs. dist., thence S. 30° W.; descend gradual N. slope.

12.10 Draw, 20 ft. below spur, drains E.; ascend gradual S. slope.

13.30 Dim road, bears N. 60° E. and S. 60° W.

15.10 The E. point of a low spur, 10 ft. above draw; descend gradually.

17.80 Draw, 10 ft. below point of spur, drains S. 75° E.; ascend gradual S. slope.

20.00 Spur, 10 ft. above draw, projects S. 80° E.; descend gradual N. slope.


32.50 Draw, 10 ft. below spur, drains E.; ascend gradual S. slope.

39.30 Spur, 20 ft. above draw, projects E., 4.00 chs. dist. to end; descend gradual NE. slope.

40.22 The 1/4 sec. cor. secs. 21 and 22, a white conglomerate stone, 14 x 9 x 3 ins., firmly set, marked 1/4 on W. face. Cor. has no accessories.

At the cor. point, on gradual NE. slope, 10 ft. below spur

Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, with the original cor. monument deposited at the base of the post, for 1/4 sec. cor. secs. 21 and 22, with brass cap marked



Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Thence, N. 0°10' W.

0.45 From this point, the 1/4 sec. cor. set for secs. 20 and 21, by J.H. Martineau, U.S. Deputy Surveyor, in 1878, bears West, 14.62 chs. dist. Cor. is a cobble stone, 10 x 10 x 8 ins., firmly set, marked 1/4 on W. face. Cor. has no accessories. I efface the marks on the cor. monument.

1.90 Dim road, bears N. 60° W. and S. 60° E.

2.20 Draw, 20 ft. below the 1/4 sec. cor., drains S. 60° E.; ascend gradual SW. slope.

27.10 Top of divide ridge bet. South Fork Big Creek and Center Fork Big Creek, 160 ft. above draw, bears E. and W.; descend steep N. slope.

34.30 Enter medium dense timber, bears E. and W.

40.21 The cor. of secs. 15, 16, 21, and 22, a sandstone, 16 x 9 x 3 ins., firmly set, marked 3 grooves on E. and S. faces. Cor. has no accessories.

DEPENDENT RESURVEY OF SUBDIVISION, T. 10 N., R. 5 E.

Chains

At the cor. point, on steep N. slope, 240 ft. below top of divide ridge.

Set an iron post, 3 ft. long, 2 ins. in diam., 30 ins. in the ground, with the original cor. monument deposited at the base of the post, for cor. of secs. 15, 16, 21, and 22, with brass cap marked

T10N	R5E
S16	S15
S21	S22

1938

From which

An aspen, 5 ins. diam., bears N. $19^{\circ}45'$ E., 18 lks. dist., marked T10N R5E S15 BT.

An aspen, 7 ins. diam., bears S. 37° E., 27 lks. dist., marked T10N R5E S22 BT.

An aspen, 5 ins. diam., bears S. $31^{\circ}45'$ W., 23 lks. dist., marked T10N R5E S21 BT.

A balsam, 10 ins. diam., bears N. $89^{\circ}30'$ W., 239 lks. dist., marked T10N R5E S16 BT.

From this cor., the cor. set for secs. 16, 17, 20, and 21, by J.H. Martineau, U.S. Deputy Surveyor, in 1878, bears N. $82^{\circ}46'$ W., 13.88 chs. dist.

Land, rolling and mountainous, with a general southeasterly and northerly exposure and drainage.

Soil, shallow gravel, clay, and rock; 4th rate.

Timber, aspen, balsam, and spruce, on N. portion of mile.

Undergrowth, sagebrush, service berry, weeds, and grass.

Good grazing land.

From the cor. of secs. 14, 15, 22, and 23.

N. $89^{\circ}30'$ W., bet. secs. 15 and 22.

Ascend gradually along top of spur, through dense short undergrowth.

- 5.10 Top of ascent on top of spur, 50 ft. above cor., projects E. from S. 85° W.; descend gradually along N. slope.
- 13.57 Fall 11 lks. S. of the sec. cor. set for secs. 15, 16, 21, and 22, by J.H. Martineau, U.S. Deputy Surveyor, in 1878.
- 24.90 Slope changes from a gradual N. slope to a gradual NW. slope.
- 27.70 Enter scattered clumps of dense aspen timber, bears N. and S.
- 39.91 The $\frac{1}{4}$ sec. cor. of secs. 15 and 22, a sandstone, 12 x 12 x 4 ins., firmly set, marked $\frac{1}{4}$ on N. face. Cor. has no accessories.
- At the cor. point, in bottom of ravine, 130 ft. below spur, drains N. 15° W., 3.00 chs. dist. to its junction with next ravine.
- Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, with the original cor. monument deposited

DEPENDENT RESURVEY OF SUBDIVISION, T. 10 N., R. 5 E.

Chains

at the base of the post, for $\frac{1}{4}$ sec. cor., with brass cap marked

S15
 $\frac{1}{4}$
S22

1938

From which

An aspen, 5 ins. diam., bears S. $52^{\circ}30'$ E., 9 lks. dist., marked $\frac{1}{4}$ S22 BT.

An aspen, 5 ins. diam., bears N. $26^{\circ}30'$ W., 30 lks. dist., marked $\frac{1}{4}$ S15 BT.

Thence, N. $89^{\circ}47'$ W.

- 6.00 Bottom of large main ravine, 50 ft. below the $\frac{1}{4}$ sec. cor., drains NE.; ascend steep SE. slope.
- 17.40 Spur, 160 ft. above ravine, projects NE.; descend gradually along rolling N. slope.
- 40.17 The cor. of secs. 15, 16, 21, and 22, 30 ft. below spur. Land, rolling and mountainous, with a general northerly exposure and drainage. Soil, shallow clay and gravel, with a rocky surface; 4th rate. Timber, scattered clumps of dense aspen on W. portion of mile. Undergrowth, sagebrush, service berry, weeds, and grass. Good grazing land.

The SW. cor. of sec. 33, T. 10 N., R. 5 E., identical with angle point No. 2, tract 42, T. 9 N., R. 5 E., is an iron post, 3 ins. diam., set, marked and witnessed, as described in the official record of the resurvey of T. 9 N., R. 5 E., Group 33, Utah.

As this cor. becomes angle point No. 6, tract 41, T. 10 N., R. 5 E., I change the marks on the brass cap of the cor. monument to read as follows.

T10N
R5E
AP6
TR41
AP2
TR42
S33

T9N

1924

Thence, from the above cor.

N. $0^{\circ}16'$ E., along the W. bdy. of sec. 33, T. 10 N., R. 5 E.


Ascend gradual S. slope of rolling mountainous land, through dense short undergrowth.

- 1.26 The closing cor. of secs. 5 and 32, identical with angle point No. 3, tract 42, T. 9 N., R. 5 E., an iron post, 3 ins. diam., set, marked and witnessed, as described in the official record of the resurvey of T. 9 N., R. 5 E., Group 33, Utah.

DEPENDENT RESURVEY OF SUBDIVISION, T. 10 N., R. 5 E.

Chains

As this cor. becomes angle point No. 5, tract 41, T: 10 N., R. 5 E., I change the markings on the brass cap of the cor. monument to read as follows.

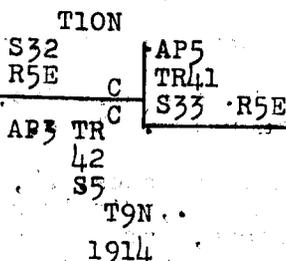


Continue on same line.

- 8.20 Head of ravine, drains E.; continue gradual ascent.
- 14.60 Spur, 30 ft. above cor., projects E.; dim road on spur, bears E. and S. 70° W.; descend steep NW. slope.
- 16.50 Recross road, bears N. 75° W. and S. 75° E.
- 32.20 Ravine, 180 ft. below spur, drains N. 30° E.; ascend gradual S. slope.
- 39.61 The 1/4 sec. cor. set for secs. 32 and 33, a sandstone, 14 x 11 x 4 ins., firmly set in the ground and small mound of stone, marked 1/4 on W. face. Cor. has no accessories.

At the cor. point, on rolling top of spur, 90 ft. above ravine, projects E.

Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, with the original cor. monument deposited at the base of the post, for 1/4 sec. cor. sec. 33, with brass cap marked



1938

From which

A balsam, 10 ins. diam., bears N. 35°30' E., 267 lks. dist., marked 1/4 S33 BT.

A spruce, 10 ins. diam., bears S. 81°15' E., 283 lks. dist., marked 1/4 S33 BT.

Thence, N. 0°08' E.

- 2.71 Point which is a southing of 40.00 chs. from the closing cor. of secs. 29 and 32.

Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, for 1/4 sec. cor. sec. 32, with brass cap marked



1938

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

From this cor., the 1/4 sec. cor. set for secs. 31 and 32, by J.H. Martineau, U.S. Deputy Surveyor, in 1878, bears S. 87°24' W., 16.76 chs. dist.

- 6.20 Enter dense timber, bears SE. and NW.

DEPENDENT RESURVEY OF SUBDIVISION, T. 10 N., R. 5 E.

- Chains
- 11.10 Leave timber, bears E. and W.
- 11.60 Large main ravine, 100 ft. below the $\frac{1}{2}$ sec. cor., sec. 32, drains S. 80° E.; ascend gradual SW. slope.
- 31.30 Dim road, bears N. 20° E. and S. 10° W.
- 33.60 Ridge, 60 ft. above ravine, bears N. 80° W. and S. 80° E.; descend gradual N. slope
- 39.55 The cor. set for secs. 28, 29, 32, and 33, a sandstone, 26 x 12 x 3 ins., firmly set in the ground and small mound of stone, marked 4 notches on E. edge and 1 notch on S. edge. Cor. has no accessories.

At the cor. point, on gradual N. slope, 10 ft. below top of ridge.

Set an iron post, 3 ft. long, 2 ins. in diam., 30 ins. in the ground, with the original cor. monument deposited at the base of the post, for cor. of secs. 28 and 33, with brass cap marked

T10N R5E	S28
S32	S33

1938

From which

A spruce, 12 ins. diam., bears S. $20^{\circ}15'$ E., 346 lks. dist., marked T10N R5E S33 BT.

No other suitable bearing tree available.

From this cor., the cor. set for secs. 29, 30, 31, and 32, by J.H. Martineau, U.S. Deputy Surveyor, in 1878, bears N. $81^{\circ}26'$ W., 16.25 chs. dist.

Land, rolling and mountainous with a general northerly and southerly exposure and drainage.

Soil, shallow gravel and clay, with a rocky surface; 4th rate.

Timber, clumps of dense aspen; spruce; and balsam.

Undergrowth, sagebrush, service berry, weeds, and grass.

Good grazing land.

From the cor. of secs. 27, 28, 33, and 34.

N. $88^{\circ}32'$ W., bet. secs. 28 and 33.

Descend abrupt NW. slope of broken mountainous land, through dense timber and short undergrowth.

1.80 Draw, 40 ft. below cor., drains N.; ascend rocky E. slope.


3.80 Spur, 40 ft. above draw, projects N. 20° E.; descend steep NW. slope through dense mahogany.

10.50 Little Crawford Creek, stream of good clear water, 5 lks. wide, 2 ins. deep, in bottom of deep canyon, 240 ft. below spur, flows NE., about 5.00 chs. dist. to its junction with Big Crawford Creek flowing easterly; dense undergrowth of willows along banks of creeks; ascend steep rocky SE. slope.

DEPENDENT RESURVEY OF SUBDIVISION T. 10 N., R. 5 E.

Chains

- 32.50 Forks of spurs, 210 ft. above creek, project N. 80° E. from S. 80° E. and S. 80° W.; descend gradually along NW. slope.
- 38.65 The 1/4 sec. cor. secs. 28 and 33, a sandstone, 20 x 8 x 3 ins., firmly set, marked 1/4 on N. face. Cor. has no accessories.
At the cor. point, on gradual NW. slope, 30 ft. below spur. Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, with the original cor. monument deposited at the base of the post, for 1/4 sec. cor. secs. 28 and 33, with brass cap marked



1938

From which

A lone pine, 12 ins. diam., bears N. 51° W., 25 1/4 lks. dist., marked 1/4 S28 BT.

Thence, N. 89° 34' W.

- 14.00 Line intersect the center one of three large sink holes.
- 38.60 Dim road, bears N. and S.
- 40.14 The cor. of secs. 28, and 33, 50 ft. above the 1/4 sec. cor. Land, mountainous, with a general northerly exposure and drainage. Soil, shallow gravel, with a rocky surface; 4th rate. Timber, scattered clumps of dense aspen and balsam. Undergrowth, sagebrush, service berry, weeds, and grass. Good grazing land.

INDEPENDENT RESURVEY OF SUBDIVISION, T. 10 N., R. 5 E.

Independent resurvey superseding the survey executed by J.H. Martineau, U.S. Deputy Surveyor, in 1878.

Note: The only corners found of the original survey of the subdivision of T. 10 N., R. 5 E., by J.H. Martineau, U.S. Deputy Surveyor, in 1878, are those mentioned and tied to as shown in this record. A diligent search was made for all the missing corners of the original survey, but evidence found indicates that the boundaries of secs. 29, and 32, and the lines bet. secs. 20 and 21, 16 and 21, and 16 and 17, were the only lines surveyed by Martineau in his completion survey of T. 10 N., R. 5 E., in 1878.

From the cor. of secs. 2, 3, 10, and 11.

N. 1° 15' W., on random line, bet. secs. 2 and 3.

- 40.00 Set temp. 1/4 sec. cor.
- 82.99 Intersect the N. bdy. of the township, 77 lks. E. of the cor. of secs. 2, 3, 34, and 35.
Thence:
S. 1° 47' E., on true line, bet. secs. 2 and 3.

INDEPENDENT RESURVEY OF SUBDIVISION, T. 10 N., R. 5 E.

Chains	
	Ascend abrupt N. slope of mountainous land, through dense timber and undergrowth.
9.10	Ascent becomes gradual, bears N. 80° W. and S. 80° E.; leave timber, bears same. 20.
11.00	Spur, 140 ft. above cor., projects S. 80° E.; descend gradual S. slope.
18.40	Ravine, 100 ft. below spur, drains N. 80° E.; dense aspen timber along bottom of ravine; ascend abrupt NE. slope.
28.50	Top of divide ridge bet. Old Canyon and Dry Canyon, 100 ft. above ravine, bears E. and W.; descend gradual SW. slope.
34.50	Dim road, bears N. 70° W. and S. 70° E.
37.10	Ravine, 50 ft. below ridge, drains SE.; dense aspen along bottom of ravine; ascend gradual NE. slope through clumps of aspen timber.
41.55	Proportionate distance; on rolling land. Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, for $\frac{1}{4}$ sec. cor. sec. 2, with brass cap marked $\frac{1}{4}$ S2 1938 From which. A balsam, 5 ins. diam., bears S. 9° E., 131 lks. dist., marked $\frac{1}{4}$ S2 BT.
42.97	On rolling land, 30 ft. above ravine. Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, for $\frac{1}{4}$ sec. cor. sec. 3, with brass cap marked $\frac{1}{4}$ S3 1938 From which. An aspen, 5 ins. diam.; bears S. 61° W., 11 lks. dist., marked $\frac{1}{4}$ S3 BT.
50.60	Top of knoll at the SE. point of spur, 100 ft. above the $\frac{1}{4}$ sec. cor. sec. 3; descend steep S. slope.
59.10	Bottom of Dry Canyon, 180 ft. below top of knoll, drains E.; unimproved road in bottom of canyon, bears E. and S. 80° W.; ascend steep N. slope.
64.70	Leave timber, bears NE. and SW.
68.70	Top of divide ridge bet. Dry Canyon and North Fork Big Creek, 180 ft. above bottom of Dry Canyon, bears E. and S. 50° W.; descend gradually along rolling E. slope.
82.99	The cor. of secs. 2, 3, 10, and 11, 30 ft. below ridge. Land, rolling and mountainous with a general northerly and southerly exposure and drainage. Soil, shallow clay and gravel, mixed with rock; 4th rate. Timber, clumps of aspen and balsam on portions of mile. Undergrowth, sagebrush, service berry, weeds, and grass. Good grazing land.

INDEPENDENT RESURVEY OF SUBDIVISION, T. 10 N., R. 5 E.

- Chains
- From the cor. of secs. 15, 16, 21, and 22.
- North, along the E. bay. of sec. 16.
- Descend abrupt N. slope of broken mountainous land, through dense timber and undergrowth.
- 5.30 Small ravine, drains NE.; continue descent.
- 7.50 Unimproved road, bears N. 75° E. and S. 75° W.
- 9.00 Small stream of good clear water, 1 lk. wide, 1 in. deep, in bottom of Center Fork Big Creek, 140 ft. below cor., flows E.; stream heads at spring which bears West, 5.00 chs. dist.; ascend gradually.
- 9.50 Unimproved road, bears E. and W.
- 15.00 Leave timber, bears E. and W.
- 22.30 Spur, 250 ft. above stream, projects SE.; descend gradual NE. slope through scattered clumps of aspen timber.
- 29.50 Draw, 50 ft. below spur, drains SE.; ascend steep S. slope.
- 38.81 Point midway bet. the cor. of secs. 15, 16, 21, and 22, and the cor. of secs. 10 and 15.
- Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, for $\frac{1}{4}$ sec. cor. sec. 15, with brass cap marked
- $\frac{1}{4}$ S15
- 1938
- Raise a mound of stone, 3 ft. base, 2 ft. high, E. of cor.
- 40.00 On top of the divide ridge bet. the Center and North Forks Big Creek, 140 ft. above draw, bears E. and W.
- Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, for $\frac{1}{4}$ sec. cor. sec. 16, with brass cap marked
- $\frac{1}{4}$ S16
- 1938
- From which
- A lone pine, 10 ins. diam., bears N. 84° 34' W., 305 lks. dist., marked $\frac{1}{4}$ S16 BT.
- Thence descend abrupt N. slope.
- 50.30 Enter dense timber, bears E. and W.
- 57.00 North Fork Big Creek, stream of good clear water, 15 lks. wide, 10 ins. deep, in bottom of deep canyon, 300 ft. below ridge, flows E.; dense willows and birch along banks of stream; ascend steep S. end of spur from the N.
- 59.30 Leave timber, bears E. and W.
- 77.62 At the intersection of a line projected W. from the $\frac{1}{4}$ sec. cor. of secs. 10 and 15.
- Set an iron post, 3 ft. long, 2 ins. in diam., 30 ins. in the ground, for cor. of secs. 10 and 15, with brass cap marked

INDEPENDENT RESURVEY OF SUBDIVISION, T. 10 N., R. 5 E.

Chains

T10N	R5E
S10	
S15	

1938

80.00 Raise a mound of stone, 3 ft. base,, 2 ft. high, E. of cor.
 On top of spur, 300 ft. above North Fork Big Creek, projects S. from N. 10° W.
 Set an iron post, 3 ft. long, 2 ins. in diam., 30 ins. in the ground, for cor. of secs. 9 and 16, with brass cap marked

T10N	R5E
S9	
S16	S10

1938

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.
 Land, broken and mountainous, with a general southerly and northerly exposure and drainage..
 Soil, shallow clay and gravel, with a rocky surface; 4th rate.
 Timber, aspen, balsam, spruce, and Douglas fir, on portion of mile.
 Undergrowth, sagebrush, service berry, weeds, and grass.
 Good grazing land.

From the $\frac{1}{4}$ sec. cor. secs. 10 and 15.

West, bet, secs. 10 and 15.

Descend gradual W. slope of mountainous land, through dense undergrowth.

1.30 Dim road, bears N. and S.

1.65 Stream of good clear water, 2 lks. wide, 2 ins. deep, in bottom of ravine, 30 ft. below cor., flows S., 3.50 chs. dist., thence SE. Spring from which stream heads, bears North of line, 1.30 chs. dist.; ascend abrupt E. slope through dense aspen timber..

12.80 Leave timber, bears N. and SE.

19.50 Spur, 270 ft. above stream, slopes SE.; ascend gradually along SE. slope.

25.90 Top of ascent, 60 ft. above spur, bears N. and S.; descend gradually along S. slope.

37.98 The cor. of secs. 10 and 15, same level as top of ascent.

Land, mountainous, with a general southeasterly exposure and drainage.
 Soil, shallow clay and gravel, with a rocky surface; 4th rate.
 Timber, dense aspen on E. portion of half mile.
 Undergrowth, sagebrush, service berry, weeds, and grass.
 Good grazing land.

INDEPENDENT RESURVEY OF SUBDIVISION, T. 10 N., R. 5 E.

Chains

From the cor. of secs. 9 and 16.

North, along the E. bdy. of sec. 9.

Ascend gradually along SE. slope of mountainous land, near top of spur to the W., through dense short undergrowth.

11.50 Forks of spur, 150 ft. above cor., projects SE. and S. 10° W. from the NW.; descend gradual NE. slope.

13.60 Enter dense scrub aspen timber, bears E. and W.

19.70 Head of ravine 60 ft. below forks of spur, drains S. 70° E.; ascend gradual SE. slope.

20.50 Leave timber, bears SE. and W.

25.50 Spur, 70 ft. above head of ravine, projects E.; descend steep N. slope.

27.10 Enter dense timber, bears E. and SW.

36.60 Large main ravine, 320 ft. below spur, drains S. 85° E.; dim road in bottom of ravine, bears S. 85° E. and W.; ascend abrupt S. slope.

37.94 Point midway bet. the cors. of secs. 3 and 10, and secs. 10 and 15; on S. slope, 80 ft. above ravine.

Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, for $\frac{1}{4}$ sec. cor. sec. 10, with brass cap marked

S10

1938

From which

An aspen, 10 ins. diam., bears S. $3^{\circ}15'$ E., 57 lks. dist., marked $\frac{1}{4}$ S10 BT.

No other suitable bearing tree available.

38.00 Leave timber, bears E. and W.

40.00 On steep S. slope, 30 ft. above the $\frac{1}{4}$ sec. cor. sec. 10.Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, for $\frac{1}{4}$ sec. cor. sec. 9, with brass cap marked $\frac{1}{4}$ S9

1938

From which


An aspen, 7 ins. diam., bears S. $2^{\circ}30'$ W., 255 lks. dist., marked $\frac{1}{4}$ S9 BT.

No other suitable bearing tree available.

41.40 Small spur, 50 ft. above the $\frac{1}{4}$ sec. cor. sec. 9, projects SE., about 4.00 chs. dist. to end; descend gradual NE. slope through aspen timber.44.20 Ravine, 80 ft. below spur, drains S. 60° E.; ascend steep S. slope through scattered clumps of timber.55.10 Spur, 350 ft. above ravine, projects S. 80° E.; descend gradual N. slope.

INDEPENDENT RESURVEY OF SUBDIVISION, T. 10 N., R. 5 E.

- Chains
- 57.30 Small ravine, 30 ft. below spur, drains E.; ascend gradual SE. slope.
 - 62.80 Small spur, 60 ft. above ravine, slopes SE.; descend gradual NE. slope.
 - 64.70 Head of ravine, 30 ft. below spur, drains S. 60° E.; ascend gradual SE. slope.
 - 69.00 Ridge, 60 ft. above head of ravine, bears N. 80° W. and S. 80° E.; descend gradual N. slope.
 - 75.00 Head of main ravine, 50 ft. below ridge, drains E.; ascend gradual S. slope.
 - 78.06 The cor. of secs. 3 and 10, subsequently set at this point
 - 79.20 Top of main divide ridge bet. Dry Canyon and North Fork Big Creek, 50 ft. above head of ravine, bears E. and S. 80° W.; descend gradual N. slope.
 - 80.00 On gradual N. slope, 10 ft. below top of ridge.
- Set an iron post, 3 ft. long, 2 ins. in diam., 30 ins. in the ground, for the cor. of secs. 4 and 9, with brass cap marked



From which

- A spruce, 12 ins. diam., bears S. 89°30' W., 141 lks. dist., marked T10N R5E S9 BT.
- A spruce, 8 ins. diam., bears N. 20°45' W., 42 lks. dist., marked T10N R5E S4 BT.

Land, broken and mountainous, with a general easterly exposure and drainage.
 Soil, shallow clay and gravel, with a rocky surface; 4th rate.
 Timber, clumps of aspen, spruce, and balsam.
 Undergrowth, sagebrush, service berry, mahogany, browse, weeds, and grass.
 Good grazing land.

-
- From the cor. of secs. 2, 3, 10, and 11.
 - West, bet. secs. 3 and 10.
 - Ascend gradual E. slope of broken mountainous land, through dense short undergrowth.
 - 11.00 Spur, 40 ft. above cor., projects S.; descend gradual W. slope.
 - 19.60 Ravine, 30 ft. below spur, drains S.; dense aspen along bottom of ravine; ascend gradual E. slope.
 - 27.80 Ascent becomes abrupt, bears N. and S.
 - 33.90 Spur, 230 ft. above ravine, projects S.; descend gradual SW. slope.

INDEPENDENT RESURVEY OF SUBDIVISION, T. 10 N., R. 5 E.

Chains

39.64 Point which is 40.00 chs. E. from the cor. of secs. 3 and 10; on gradual SW. slope, 20 ft. below spur.

Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, for 1/4 sec. cor. sec. 3, with brass cap marked

1/4 S3

1938

Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.

40.00 On gradual SW. slope, 30 ft. below the 1/4 sec. cor. sec. 3.

Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, for 1/4 sec. cor. sec. 10, with brass cap marked

1/4 S10

1938

Raise a mound of stone, 3 ft. base, 2 ft. high, S. of cor.

45.90 Ravine, 40 ft. below the 1/4 sec. cor. sec. 10, drains SE.; ascend gradual SE. slope through clumps of aspen.


50.40 Leave aspen, bears NW. and SE.

68.60 Enter scattered aspen, bears N. and S.

78.64 Intersect the E. bdy. of sec. 9, South, 1.94 chs. dist. from the cor. of secs. 4 and 9.

At point of intersection, on general S. slope, 320 ft. above ravine.

Set an iron post, 3 ft. long, 2 ins. in diam., 30 ins. in the ground, for the cor. of secs. 3 and 10, with brass cap marked



1938

From which

An aspen, 4 ins. diam., bears S. 56°45' E., 39 lks. dist., marked T10N R5E S10 BT.

No other bearing tree available.

Land, broken and mountainous, with a general southeasterly exposure and drainage.

Soil, shallow clay and gravel, with a rocky surface; 4th rate.

Timber, clumps of dense aspen and scattered balsam.

Undergrowth, sagebrush, service berry, mountain laurel, browse, weeds, and grass.

Good grazing land.

INDEPENDENT RESURVEY OF SUBDIVISION, T. 10 N., R. 5 E.

Chains

From the cor. of secs. 4 and 9.
North, on true line, bet. secs. 3 and 4.
Descend abrupt N. slope of high mountainous land, through dense timber and undergrowth.

12.50 Bottom of Dry Canyon, 320 ft. below cor., drains E.; ascend steep S. slope.

13.10 Unimproved road, bears S. 80° E. and W.

14.10 Leave timber,, bears E. and W.

33.00 Bend in top of divide ridge bet. Old Canyon and Dry Canyon, 500 ft. above bottom of Dry Canyon, bears N. 60° E. and N. 60° W.; descend abrupt NE. slope through dense timber.

38.06 Point which is 40.00 chs. North of the cor. of secs. 3 and 10.

On abrupt NE. slope, 50 ft. below top of divide ridge.

Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, for 4 sec. cor. sec. 3, with brass cap marked

S3

1938

From which

An aspen, 6 ins. diam., bears N. 20° E., 3 lks. dist., marked S3 BT.

A lodge pole pine, 6 ins. diam., bears S. 76° E., 21 lks. dist., marked S3 BT.

40.00 On steep NE. slope, 20 ft. below the 4 sec. cor. sec. 3.

Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, for 4 sec. cor. sec. 4, with brass cap marked

S4

1938

From which

A balsam, 20 ins. diam., bears S. 65°45' W., 27 lks. dist., marked S4 T.

A balsam, 12 ins. diam., bears N. 80° W., 9 lks. dist., marked S4 BT.

49.00 Head of ravine, 220 ft. below the 4 sec. cor. sec. 4, drains E.; ascend gradual S. slope.

54.30 Top of ridge, 70 ft. above ravine, bears N. 70° E. and S. 70° W.; descend steep NW. slope through dense lodge pole pine timber.

69.10 Improved Forest Service road, bears E. and W.

73.00 Recross road, bears N. 70° W. and S. 70° E.

79.92 Intersect the S. boundary of sec. 34, T. 11 N., R. 5 E., East, 3.40 chs. dist., from the cor. of secs. 33 and 34.

At point of intersection, on abrupt NW. slope, 530 ft. below ridge.

INDEPENDENT RESURVEY OF SUBDIVISION, T. 10 N., R. 5 E.

Chains

Set an iron post, 3 ft. long, 2 ins. in diam., 30 ins. in the ground, for closing cor. of secs. 3 and 4, T. 10 N., R. 5 E., with brass cap marked

T11N R5E
S34

S4 | S3
T10N R5E
C C

1938

From which

A lodge pole pine, 5 ins. diam., bears S. 45° E., 22 lks. dist., marked T10N R5E S3 CC BT.

A lodge pole pine, 5 ins. diam., bears S. 47°45' W., 20 lks. dist., marked T10N R5E S4 CC BT.

Land, broken and mountainous, with a general easterly exposure and drainage.
Soil, shallow clay, gravel, and rock; 4th rate.
Timber, aspen, balsam, spruce, Douglas fir, and lodge pole pine.
Undergrowth, sagebrush, service berry, scrub and dwarf timber, browse, weeds, and grass.
Good grazing land.

At a point on the N. bdy. of sec. 3, T. 10 N., R. 5 E., which is an easting of 40.00 chs. from the closing cor. of secs. 3 and 4.

Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, for 1/4 sec. cor. sec. 3, T. 10 N., R. 5 E., with brass cap marked

1/4 S3

1938

From which

A balsam, 8 ins. diam., bears S. 50°30' E., 33 lks. dist., marked 1/4 S3 BT.

A balsam, 9 ins. diam., bears S. 45°30' W., 17 lks. dist., marked 1/4 S3 BT.

From this cor., the 1/4 sec. cor. sec. 34, T. 11 N., R. 5 E., bears S. 88°21' W., 3.62 chs. dist.

.85

From the cor. of secs. 28 and 33.

North, along the W. bdy. of sec. 28.

Descend gradual N. slope of rolling mountainous land, through dense timber and short undergrowth.

3.16 The C.C. of secs. 29 and 32, subsequently set at this point.

7.00 Leave timber, bears E. and W.

INDEPENDENT RESURVEY OF SUBDIVISION, T. 10 N., R. 5 E.

- 300 Small spur, 10 ft. below cor., projects N. 80° E.; descend gradual N. slope.
- 301 Side draw, 110 ft. below spur, drains N. 60° E. to Big Crawford Creek; ascend gradual S. slope.
- 302 Point midway bet. the cors. of secs. 20 and 33, and secs. 21 and 28.
on gradual S. slope, 20 ft. above draw.
Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, for sec. cor. sec. 20, with brass cap marked

328
1938

- 303 Place a mound of stone, 3 ft. base, 2 ft. high, E. of cor.
- 304 Point 10.00 chs. North of the C.C. secs. 29 and 32; on gradual S. slope, 10 ft. above the 1/2 sec. cor. sec. 28.
Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, for 1/2 sec. cor. sec. 29, with brass cap marked

329
1938

- 305 Place a mound of stone, 3 ft. base, 2 ft. high, W. of cor.
- 306 Spur, 60 ft. above the 1/2 sec. cor. sec. 29, projects E.; about 15.00 chs. dist., thence S.; descend gradual N. slope through scattered clumps of aspen.
- 307 Ravine, 20 ft. below spur, drains N. 35° E.; ascend gradual S. slope.
- 308 Spur, 10 ft. above ravine, projects E.; descend gradual S. slope.
- 309 Swale, 10 ft. below spur, drains E.; ascend gradual S. slope.
- 310 Spur, 8 ft. above swale, projects S. 70° E.; descend gradual N. slope.
- 311 Ravine, 20 ft. below spur, drains E.; ascend gradual S. slope.
- 312 Spur, 5 ft. above ravine, projects S. 60° E.; descend gradual N. slope.
- 313 Intersect a line projected West from the 1/2 sec. cor. sec. 28.
Set an iron post, 3 ft. long, 2 ins. in diam., 30 ins. in the ground, for cor. of secs. 21 and 28, with brass cap marked

T10N R5E
329 | 321
329 | 320
1938

INDEPENDENT RESURVEY OF SUBDIVISION, T. 10 N., R. 5 E.

Chains

From which
An aspen, 6 ins. in diam., bears N. 63°45' E., 137 lks. dist., marked T10N R5E S21 BT.

An aspen, 8 ins. in diam., bears S. 60° E., 114 lks. dist., marked T10N R5E S28 BT.

From this cor., the cor. set for secs. 19, 20, 29, and 30, by J.H. Martineau, U.S. Deputy Surveyor, in 1878, bears S. 87°41' W., 15.62 chs. dist. Cor. is a sandstone, 12 x 9 x 4 ins., loosely set, marked 2 notches on S. edge and 4 notches on E. edge. Cor. has no accessories. I efface the marks on the cor. monument.

Thence, along the E. bdy. of sec. 29.

83.16 Point which is North, 80.00 chs. dist. from the closing cor. secs. 29 and 32; on gradual NE. slope, in dense timber.

Set an iron post, 3 ft. long, 2 ins. in diam., 30 ins. in the ground, for cor. of secs. 20 and 29, with brass cap marked

T10N R5E
.S20 |
----- S21
S29 |
1938

From which

A balsam, 9 ins. in diam., bears S. 21° W., 186 lks. dist., marked T10N R5E S29 BT.

An aspen, 5 ins. in diam., bears N. 18°45' W., 100 lks. dist., marked T10N R5E S20 BT:

Land, rolling and mountainous.
Soil, shallow clay and gravel, with rock; 4th rate.
Timber, aspen, balsam, and spruce, on portions of mile.
Undergrowth, sagebrush, dwarf aspen, weeds, and grass.
Good grazing land.

From the 1/4 sec. cor. sec. 28.

West, bet. secs. 21 and 28.

Descend gradual SW. slope of rolling mountainous land, through dense short undergrowth.

0.78 Point which is East, 40.00 chs. dist. from the cor. of secs. 21 and 28.

Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, for the 1/4 sec. cor. sec. 21, with brass cap marked

1/4 S21
1938

Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.

12.00 Head of draw, 20 ft. below the 1/4 sec. cor., drains S. 30° E.; about 8.00 chs. dist., thence SW.; ascend steep E. slope.

15.03 Find no trace of the 1/4 sec. cor. secs. 20 and 29, set by J.H. Martineau, U.S. Deputy Surveyor, in 1878.

16.00 Red clay and limestone spur, 60 ft. above head of draw, slopes S. 10° W.; descend gradually along S. slope.

26.00 Slope changes from a gradual S. slope to a gradual SW. slope.

31.00 Draw, 80 ft. below spur, drains S. 60° E.; ascend gradual NE. slope.

INDEPENDENT RESURVEY OF SUBDIVISION, T. 10 N., R. 5 E.

Chains

31.30 Dim road, bears N. 10° W. and S. 10° E.

32.50 Enter dense timber, bears NW. and SE.

40.78 The cor. of secs. 21 and 28, 50 ft. above draw.

Land, rolling and mountainous, with a general southerly exposure and drainage.
Soil, shallow gravel, clay, and rock; 4th rate.
Timber, aspen and balsam on portions of mile.
Undergrowth, sagebrush, service berry, weeds, and grass.
Good grazing land.

From the cor. of secs. 15, 16, 21, and 22.

West, on a random sectional correction line, bet. secs. 16 and 21.

40.00 Set temp. 1/4 sec. cor.

80.00 Set temp. cor. of secs. 16 and 17.

80.90 Set temp. cor. of secs. 20 and 21.

Thence, from the temp. cor. of secs. 20 and 21.

South, on random line, bet. secs. 20 and 21.

40.00 Set temp. 1/4 sec. cor.

78.19 Intersect the cor. of secs. 20 and 29.

Thence,

North, on true line, bet. secs. 20 and 21.

Descend gradual NE. slope of rolling mountainous land, through dense timber and undergrowth.

14.40 Old road, bears S. 85° E. and W.

14.90 Ravine, 30 ft. below cor., drains E.; ascend gradual S. slope.

17.10 Spur, 30 ft. above ravine, projects S. 60° E.; descend gradual NE. slope.

21.20 Draw, 20 ft. below spur, drains SE.; ascend gradual SW. slope.

30.30 Leave timber, bears NW. and SE.

38.00 Point midway bet. the cors. of secs. 20 and 21, and secs. 21 and 28; on gradual SW. slope, 190 ft. above draw.

Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, for 1/4 sec. cor. sec. 21, with brass cap marked

1/4 S21

1938

Raise a mound of stone, 3 ft. base, 2 ft. high, E. of cor.

40.00 On gradual SW. slope, 30 ft. above the 1/4 sec. cor. sec. 21.

Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, for 1/4 sec. cor. sec. 20, with brass cap marked

INDEPENDENT RESURVEY OF SUBDIVISION, T. 10 N., R. 5 E.

Chains

1/4 S20

1938

- Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.
 Cor. set in Forest Service trail, bears N. 30° W. and
 S. 30° E.
- 43.80 Spur, 20 ft. above the 1/4 sec. cor., sec. 20, projects
 S. 30° E.; descend gradual NE. slope through scattered
 clumps of aspen.
- 46.00 Ravine, 20 ft. below spur, drains S. 80° E.; leave timber,
 bears E. and W.; ascend gradual SW. slope.
- 58.20 Spur, 130 ft. above ravine, projects S. 70° E.; descend
 gradual NE. slope.
- 61.40 Ravine, 30 ft. below spur, drains S. 85° E.; ascend
 gradual SW. slope.
- 66.60 Top of divide ridge bet. South Fork Big Creek and Center
 Fork Big Creek, 60 ft. above ravine, bears E. and W.;
 descend steep N. slope.
- 67.60 Enter dense timber and undergrowth, bears E. and W.
- 78.19 Intersect the S. bdy. of sec. 17, West, 90 lks. dist.
 from the point for the cor. of secs. 16 and 17.
- At point of intersection, on steep N. slope, 230 ft. below
 top of divide ridge.
- Set an iron post, 3 ft. long, 2 ins. in diam., 30 ins. in
 the ground, for closing cor. of secs. 20 and 21, with
 brass cap marked

T10N R5E
 S17

S20 | S21
 CC

1938

From which

A balsam, 6 ins. in diam., bears S. 25° E., 22 lks.
 dist., marked T10N R5E S21 CC BT.

A balsam, 6 ins. in diam., bears S. 10° W., 39 lks.
 dist., marked T10N R5E S20 CC BT.

Land, broken and mountainous, with a general easterly
 exposure and drainage.
 Soil, shallow clay and gravel, with rock; 4th rate.
 Timber, aspen, spruce, and balsam, on portions of mile.
 Undergrowth, sagebrush, service berry, willows, and weeds.
 Good grazing land.

From the cor. of secs. 15, 16, 21, and 22.

West, on a sectional correction line, bet. secs. 16 and 21.

Descend gradually along rolling N. slope of mountainous
 land, through dense timber and undergrowth.

- 8.80 Ravine, 10 ft. below cor., drains N. 15° E.; ascend
 gradual NE. slope.
- 13.40 Unimproved road, bears N. 20° E. and S. 20° W.
- 26.00 Spur, 120 ft. above ravine, projects N. 15° E.; descend
 gradual NW. slope.

INDEPENDENT RESURVEY OF SUBDIVISION, T. 10 N., R. 5 E.

Chains

30.30 Ravine, 40 ft. below spur, drains N. 15° E.; ascend gradual N. slope.

40.00 On N. slope, in dense timber and undergrowth, 50 ft. above ravine.

Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, for 1/4 sec. cor. sec. 16, with brass cap marked

1/4 S16

1938

From which

A lodge pole pine, 7 ins. in diam., bears N. 45° W., 12 lks. dist., marked 1/4 S16 BT.

40.90 Point which is 40.00 chs. East of the closing cor. of secs 20 and 21.

Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, for 1/4 sec. cor. sec. 21, with brass cap marked

1/4 S21

1938

From which

A lodge pole pine, 10 ins. in diam., bears S. 58° E., 113 lks. dist., marked 1/4 S21 BT.

Continue gradual ascent along N. slope through dense timber and undergrowth.

80.00 On steep N. slope, 100 ft. above the 1/4 sec. cor. sec. 16.

Set an iron post, 3 ft. long, 2 ins. in diam., 30 ins. in the ground, for cor. of secs. 16 and 17, with brass cap marked

T10N | R5E
S17 | S16

S21

1938

From which

A lodge pole pine, 10 ins. in diam., bears N. 41°30' E., 12 lks. dist., marked T10N R5E S16 BT.

A balsam, 9 ins. in diam., bears N. 30° W., 35 lks. dist., marked T10N R5E S17 BT.

80.90 The closing cor. of secs. 20 and 21.

Land, mountainous, with a general northerly exposure and drainage.

Soil, shallow clay and sand, with a rocky surface; 4th rate Timber, aspen, balsam, spruce, Douglas fir, and lodge pole pine.

Undergrowth, sagebrush, service berry, willows, choke cherry, weeds, and grass. Dense willows and mountain laurel on W. portion of mile.

Good grazing land.

INDEPENDENT RESURVEY OF SUBDIVISION, T. 10 N., R. 5 E.

Chains

From the cor. of secs. 16 and 17.

N. $0^{\circ}01'$ W., bet. secs. 16 and 17.

Descend steep N. slope through dense timber and undergrowth.

3.90 Bottom of Center Fork Big Creek Canyon, 80 ft. below cor., drains E.; ascend steep S. slope.

31.20 Top of divide ridge bet. Center Fork Big Creek and North Fork Big Creek canyons, 450 ft. above bottom of Center Fork Big Creek, bears N. 85° W. and S. 85° E.; descend steep N. slope.

40.00 On steep N. slope, 160 ft. below top of divide ridge.

Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, for $\frac{1}{4}$ sec. cor. secs. 16 and 17, with brass cap marked

S17	S16
-----	-----

1938

From which

An aspen, 6 ins. diam., bears S. $59^{\circ}30'$ E., 17 lks. dist., marked $\frac{1}{4}$ S16 BT.

A balsam, 10 ins. diam., bears S. 69° W., 27 lks. dist., marked $\frac{1}{4}$ S17 BT.

41.30 Ravine, 30 ft. below the $\frac{1}{4}$ sec. cor., flows N. 70° E.; ascend gradual SE. slope.

47.70 Spur, 70 ft. above ravine, projects N. 85° E.; descend steep N. slope.

54.00 Bottom of North Fork Big Creek canyon, 220 ft. below spur, drains E.; ascend steep ledgy S. slope through dense mahogany.

61.20 Spur, 270 ft. above canyon, projects S. 70° E.; descend gradual NE. slope through dense timber.

71.30 Small ravine, 40 ft. below spur, drains S. 80° E., about 5.00 chs. dist., thence southerly; ascend SE. slope.

80.00 On gradual SE. slope, 60 ft. above ravine.

Set an iron post, 3 ft. long, 2 ins. in diam., 30 ins. in the ground, for the cor. of secs. 8, 9, 16, and 17, with brass cap marked

T10N	R5E
S8	S9

S17	S16
-----	-----

1938

A balsam, 12 ins. diam., bears N. 5° E., 83 lks. dist., marked T10N R5E S9 BT.

A balsam, 5 ins. diam., bears S. 78° E., 75 lks. dist., marked T10N R5E S16 BT.

A balsam, 15 ins. diam., bears S. $23^{\circ}15'$ W., 113 lks. dist., marked T10N R5E S17 BT.

A balsam, 12 ins. diam., bears N. 50° W., 75 lks. dist., marked T10N R5E S8 BT.

340

INDEPENDENT RESURVEY OF SUBDIVISION, T. 10 N., R. 5 E.

Chains

Land, broken and mountainous, with a general southeasterly exposure and drainage.

Soil, shallow clay and gravel, with a rocky surface; 4th rate.

Timber, aspen, balsam, spruce, Douglas fir, and white pine.

Undergrowth, sagebrush, dwarf pine and aspen, mahogany, service berry, choke cherry, willows, weeds, and grass. Good grazing land.

East, on random line, bet. secs. 9 and 16.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

79.90 Intersect the N. and S. line, 9 lks. S. of the cor. of secs. 9 and 16.

Thence:

S. $99^{\circ}56'$ W., on true line, bet. secs. 9 and 16.

Descend gradually over broken SW. slope of mountainous land, through dense short undergrowth.

11.60 Ravine, 140 ft. below cor., drains S.; ascend steep E. slope through dense timber.

12.70 From this point, the cor. set for the cor. of secs. 8, 9, 16, and 17, by J.H. Martineau, U.S. Deputy Surveyor, in 1878, bears South, 1.20 chs. dist.

19.20 Spur, 200 ft. above ravine, projects S. 20° E.; descend gradual SW. slope.

28.40 Head of ravine, 20 ft. below spur, drains S.; ascend gradual SE. slope through dense aspen.

31.40 Spur, 40 ft. above head of ravine, projects S. 10° E.; descend gradual SW. slope.

39.95 On gradual SW. slope, 130 ft. below spur.

Set an iron post, $\frac{3}{4}$ ft. long, 1 in. in diam., 30 ins. in the ground, for $\frac{1}{4}$ sec. cor. secs. 9 and 16, with brass cap marked

S9
 $\frac{1}{4}$
S16

1938

From which

An aspen, 7 ins. diam., bears N. 23° E., 16 lks. dist., marked $\frac{1}{4}$ S9 BT.

An aspen, 5 ins. diam., bears S. 25° W., 9 lks. dist., marked $\frac{1}{4}$ S16 BT.

44.80 Draw, 20 ft. below the $\frac{1}{4}$ sec. cor., drains S. 35° E.; ascend steep NE. slope.

66.70 Spur, 340 ft. above draw, projects S. 85° E.; continue ascend over NE. slope.

75.60 Spur, 100 ft. above last spur, projects SE.; descend gradual W. slope.

INDEPENDENT RESURVEY OF SUBDIVISION, T. 10 N., R. 5 E.

Chains

- 78.50 Ravine, 60 ft. below spur, drains S.; ascend gradual SE. slope.
- 79.90 The cor. of secs. 8, 9, 16, and 17, 30 ft. above ravine.
Land, broken and mountainous, with a general southwesterly exposure and drainage.
Soil, shallow clay and gravel, with a rocky surface; 4th rate.
Timber, aspen, spruce, and balsam.
Undergrowth, sagebrush, service berry, mahogany, willows, dwarf timber, browse, weeds, and grass.
Good grazing land.
-
- N. 0° 01' W., bet, secs. 8 and 9.
- Ascend steep SE. slope of high mountainous land, through dense timber and undergrowth.
- 11.40 Leave timber, bears NE. and SW.
- 24.70 Enter timber, bears E. and W.
- 28.40 Ridge, 280 ft. above cor., bears E. and W.; descend gradual NE. slope.
- 40.00 On gradual NE. slope, 70 ft. below ridge.
Set an iron post, 3 ft. long, 1 in. in diam., 12 ins. in the ground to solid rock and in a large mound of stone, for $\frac{1}{4}$ sec. cor. secs. 8 and 9, with brass cap marked
- $\frac{1}{4}$
S8 | S9
1938
- From which
- A spruce, 12 ins. diam., bears N. 30° E., 14 lks. dist., marked $\frac{1}{4}$ S9 BT.
- A spruce, 18 ins. diam., bears N. 20° W., 10 lks. dist., marked $\frac{1}{4}$ S8 BT.
- 43.30 Draw, 130 ft. below the $\frac{1}{4}$ sec. cor., drains S. 85° E.; ascend steep S. slope.
- 46.80 Limestone spur; 120 ft. above draw, projects SE., about 5.00 chs. dist. to end; thence ascend gradual SE. slope.
- 58.80 Bottom of ravine, 60 ft. above spur, drains S. 30° E.; ascend gradual S. slope.
- 66.40 Ridge, 70 ft. above ravine, bears NW. and S. 80° E.; descend gradually along E. slope.
- 73.60 Slope changes from a gradual E. slope to a gradual NE. slope.
- 80.00 On gradual NE. slope, 110 ft. below ridge.
Set an iron post, 3 ft. long, 2 ins. in diam., 30 ins. in the ground, for cor. of secs. 4, 5, 8, and 9, with brass cap marked

INDEPENDENT RESURVEY OF SUBDIVISION, T. 10 N., R. 5 E.

Chains

T10N	R5E
S5	S4
S8	S9

1938

From which

A lodge pole pine, 8 ins. diam., bears N. 8° E., 71 lks. dist., marked T10N R5E S4 BT.

A lodge pole pine, 11 ins. diam., bears S. 22° 30' E., 54 lks. dist., marked T10N R5E S9 BT.

A lodge pole pine, 9 ins. diam., bears S. 22° W., 25 lks. dist., marked T10N R5E S8 BT.

A lodge pole pine, 9 ins. diam., bears N. 27° 30' W., 50 lks. dist., marked T10N R5E S5 BT.

Land, high and mountainous, with a general easterly exposure and drainage.
 Soil, shallow clay with a rocky surface; 4th rate.
 Timber, aspen, spruce, balsam, Douglas fir, and lodge pole pine.
 Undergrowth, sagebrush, dwarf timber, willows, service berry, browse, weeds, and grass.
 Good grazing land.

N. 89° 56' E., on random line, bet. secs. 4 and 9.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

79.90 Intersect the cor. of secs. 4 and 9.

Thence:

S. 89° 56' W., on true line, bet. secs. 4 and 9.

Ascend gradually along steep N. slope of high mountainous land, through dense timber and undergrowth.

20.80 Top of ascent on N. slope, 70 ft. above cor., slopes N. and bears S.; descend gradually along steep N. slope.

39.95 At head of ravine, 100 ft. below top of ascent, drains N. 30° E.

Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, for $\frac{1}{4}$ sec. cor. secs. 4 and 9, with brass cap marked

S4
$\frac{1}{4}$
S9

1938

From which

A lodge pole pine, 12 ins. diam., bears N. 28° E., 40 lks. dist., marked $\frac{1}{4}$ S4 BT.

A lodge pole pine, 14 ins. diam., bears S. 8° W., 30 lks. dist., marked $\frac{1}{4}$ S9 BT.

INDEPENDENT RESURVEY OF SUBDIVISION' T. 10 N., R. 5 E.

Chains

Thence ascend gradually along N. slope.

54.70 Top of divide ridge bet. North Fork Big Creek and Dry Canyon, 140 ft. above the $\frac{1}{4}$ sec. cor., bears S. 85° E. and NW.; thence ascend gradual SE. slope.

64.70 Recross top of divide ridge, 60 ft. above last crossing, bears N. 85° E. and SW.; thence ascend gradual NE. slope.

70.80 Spur; 70 ft. above ridge, projects N. 30° E.; descend gradual NW. slope.

79.90 The cor. of secs. 4, 5, 8, and 9, 50 ft. below spur.

Land, high and mountainous with a general northerly exposure and drainage.

Soil, shallow black clay-loam with a rocky surface; 4th rate.

Timber, aspen, lodge pole pine, spruce, Douglas fir, and balsam.

Undergrowth, sagebrush, dwarf timber, service berry, weeds, mountain laurel, and grass.

Good grazing land.

N. 0°01' W., on true line, bet. secs. 4 and 5.

Over high mountainous land, through dense timber and undergrowth.

1.00 Shallow draw, 10 ft. below cor., near head, drains NE.; ascend gradual SE. slope.

8.20 Low spur, 20 ft. above draw, projects NE.; descend gradual NW. slope.

16.60 Forks of draws at the head of Dry Canyon, 70 ft. below spur, drains E. from SW. and NW.; ascend gradual SW. slope.

27.60 Improved and graded Forest Service road, bears N. 50° W. and S. 50° E.

30.80 Top of ridge bet. Dry Canyon and Old Canyon, 130 ft. above junction of draws, bears N. 80° W. and S. 80° E.; descend gradually along E. slope.

40.00 On E. slope, 60 ft. below top of divide ridge.

Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, for $\frac{1}{4}$ sec. cor. secs. 4 and 5, with brass cap marked

$\frac{1}{4}$
S5 | S4

1938

From which

A lodge pole pine, 10 ins. diam., bears S. 81° E., 59 lks. dist., marked $\frac{1}{4}$ S4 BT.

A lodge pole pine, 20 ins. diam., bears S. 59° W., 18 lks. dist., marked $\frac{1}{4}$ S5 BT.

Thence ascend gradual SE. slope.

45.00 Spur, 30 ft. above the $\frac{1}{4}$ sec. cor., projects NE.; descend gradual NW. slope.

INDEPENDENT RESURVEY OF SUBDIVISION, T. 10 N., R. 5 E.

Chains

- 51.50 Descent becomes abrupt, bears NE. and SW.
- 57.90 Ravine, 230 ft. below spur, drains N. 60° E.; ascend gradual SE. slope.
- 60.40 Limestone spur, 50 ft. above ravine, projects S. 70° E.; descend abrupt NE. slope.
- 62.20 Ravine, 60 ft. below spur, drains S. 60° E.; ascend abrupt SW. slope.
- 74.40 Spur, 190 ft. above ravine, projects SE.; descend gradually along E. slope.
- 79.07 Intersect the S. bdy. of sec. 33, T. 11 N., R. 5 E., N. 88°31' E., 2.69 chs. dist. from the cor. of secs. 32 and 33.

At point of intersection, on gradual E. slope, 30 ft. below spur,

Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, for closing cor. of secs. 4 and 5, T. 10 N., R. 5 E., with brass cap marked

T11N R5E
S33

S5	S4
T10N	R5E
C C	

1938

From which

A lodge pole pine, 10 ins. diam., bears S. 65° E., 19 lks. dist., marked T10N R5E S4 CC BT.

A lodge pole pine, 12 ins. diam., bears S. 7° W., 13 lks. dist., marked T10N R5E S5 CC BT.

Land, high and mountainous, with a general easterly exposure and drainage.
Soil, shallow dark clay loam, with a gravelly and rocky surface; 4th rate.
Timber, aspen, lodge pole pine, balsam, spruce, and Douglas fir.
Undergrowth, mountain laurel, sagebrush, service berry, dwarf timber, mahogany, weeds, and grass.
Good grazing land.

At midpoint bet. closing cors. on the N. bdy. of sec. 4, T. 10 N., R. 5 E.

Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, for $\frac{1}{2}$ sec. cor. sec. 4, T. 10 N., R. 5 E., with brass cap marked

S4

1938

From which

A lodge pole pine, 14 ins. diam., bears S. 26°30' E., 26 lks. dist., marked $\frac{1}{2}$ S4 BT.

INDEPENDENT RESURVEY OF SUBDIVISION, T. 10 N., R. 5 E.

Chains

A lodge pole pine, 12 ins. diam., bears S. 47° W.,
12 lks. dist., marked $\frac{1}{4}$ S4 BT.

From this cor., the $\frac{1}{4}$ sec. cor. sec. 33, T. 11 N., R. 5 E.,
bears S. $89^{\circ}52'$ W., 2.76 chs. dist.

At a point on the S. bdy. of sec. 32, T. 10 N., R. 5 E.,
which is a westing of 40.00 chs. from the closing cor. of
secs. 5 and 32, identical with angle point No. 3, tract
42, T. 9 N., R. 5 E., and angle point No. 5, tract 41,
T. 10 N., R. 5 E.

Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in
the ground, for $\frac{1}{4}$ sec. cor. sec. 32, T. 10 N., R. 5 E.,
with brass cap marked

$\frac{1}{4}$ S32

1938

Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.

From this cor., the closing cor. of secs. 5 and 6, T. 9 N.,
R. 5 E., bears S. $89^{\circ}15'$ E., 19.86 chs. dist. Cor. is an
iron post, 2 ins. diam., set, marked and witnessed, as
described in the official record of the resurvey of
T. 9 N., R. 5 E. I change the marks on the brass cap of
the cor. monument from S31 to S32.

At a point, N. $89^{\circ}15'$ W., 40.00 chs. dist. from the $\frac{1}{4}$ sec.
cor. sec. 32, T. 10 N., R. 5 E.

Set an iron post, 3 ft. long, 2 ins. in diam., 30 ins. in
the ground and mound of stone, for cor. of secs. 31 and 32,
T. 10 N., R. 5 E., with brass cap marked.

T10N	R5E
S31	S32

TR43

T9N

1938

From which

A balsam, 8 ins. diam., bears N. 46° E., 51 lks.
dist., marked T10N R5E S32 BT.

An aspen, 5 ins. diam., bears N. $37^{\circ}45'$ W., 41 lks.
dist., marked T10N R5E S31 BT.

From this cor., the cor. set for angle point No. 1, tract
43, T. 9 N., R. 5 E., and for the $\frac{1}{4}$ sec. cor. sec. 31,
T. 10 N., R. 5 E., bears S. $89^{\circ}15'$ E., 13.95 chs. dist.
Cor. is an iron post, 1 in. diam., set, marked and witnessed
as described in the official record of the resurvey of
T. 9 N., R. 5 E. I change the marks on the brass cap of
the cor. monument from $\frac{1}{4}$ S31 to S32, and efface the marks
on the two bearing trees in sec. 32.

From the cor. of secs. 31 and 32, T. 10 N., R. 5 E., the
cor. of Ts. 9 and 10 N., Rs. 4 and 5 E., bears N. $89^{\circ}15'$ W.,
18.76 chs. dist.

Thence, from the cor. of secs. 31 and 32.


N. $0^{\circ}01'$ W., bet. secs. 31 and 32.

INDEPENDENT RESURVEY OF SUBDIVISION, T. 10 N., R. 5 E.

Chains

- Ascend gradually over broken SE. slope of high mountainous land, through dense timber and undergrowth.
- 6.70 Spur, 60 ft. above cor., projects E.; descend abrupt NE. slope.
- 13.70 Ravine, 120 ft. below spur, drains N. 75° E.; ascend steep SE. slope.
- 29.00 Spur, 190 ft. above ravine, slopes E.; descend abrupt N. slope.
- 35.20 Ravine, 120 ft. below spur, drains E.; ascend steep S. slope.
- 40.00 On steep S. slope, 140 ft. above ravine.

Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, for $\frac{1}{4}$ sec. cor. secs. 31 and 32, with brass cap marked




From which

An aspen, 6 ins. diam., bears S. 3°30' W., 178 lks. dist., marked $\frac{1}{4}$ S31 BT.

No other suitable bearing tree available.

- 42.60 Spur, 30 ft. above the $\frac{1}{4}$ sec. cor., slopes E.; descend steep N. slope.
- 48.30 Ravine, 160 ft. below spur, drains N. 70° E.; ascend steep SE. slope.
- 52.80 Spur, 90 ft. above ravine, slopes E.; descend steep NE. slope.
- 56.60 Ravine, 100 ft. below spur, drains S. 70° E.; ascend steep SE. slope.
- 63.50 Ascent becomes gradual, bears NE. and SW.
- 71.50 Spur, 300 ft. above ravine, slopes E.; descend gradual NE. slope.
- 80.00 On general NE. slope, 130 ft. below spur.

Set an iron post, 3 ft. long, 2 ins. in diam., 30 ins. in the ground, for cor. of secs. 29, 30, 31, and 32, with brass cap marked



From which

A balsam, 5 ins. diam., bears N. 68°30' E., 120 lks. dist., marked T10N R5E S29 BT.

An aspen, 3 ins. diam., bears S. 81°45' E., 27 lks. dist., marked BT.

INDEPENDENT RESURVEY OF SUBDIVISION, T. 10 N., R. 5 E.

Chains

A balsam, 12 ins. diam., bears S. 30° W., 49 lks. dist., marked T10N R5E S31 BT.

A balsam, 10 ins. diam., bears N. 27°30' W., 71 lks. dist., marked T10N R5E S30 BT.

Land, broken and mountainous, with a general easterly exposure and drainage.
Soil, shallow gravel and clay, with a rocky surface; 4th rate.

Timber, aspen, balsam, spruce, Douglas fir, and white pine.
Undergrowth, sagebrush, mountain laurel, mahogany, dwarf timber, browse, weeds, and grass.
Good grazing land.

East, on true line, bet. secs. 29 and 32.

Descend gradual NE. slope of high mountainous land, through dense timber and undergrowth.

- 3.40 Descent becomes abrupt, bears NW. and SE.
- 13.80 Ravine, 270 ft. below cor., drains SE.; ascend gradual SW. slope.
- 22.30 Top of ascent, 50 ft. above ravine, bears NW. and SE.; leave timber, bears with same; descend gradually along rolling S. slope.
- 32.00 Center of clump of dense aspen timber, bears N. and S.
- 40.04 Point midway bet. the cor. of secs. 29, 30, 31, and 32, and the closing cor. of secs. 29 and 32; on top of spur, 60 ft. below top of ascent, projects E. from N. 85° W.
- Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, for $\frac{1}{4}$ sec. cor. secs. 29 and 32, with brass cap marked

S29

$$\frac{1}{4}$$

 S32

1938

From which

An aspen, 8 ins. diam., bears North, 302 lks. dist., marked $\frac{1}{4}$ S29 BT.

No other bearing tree available.

Thence along top of spur.


- 70.00 Leave top of spur at forks, project N. 80° E. and S. 80° E.; descend gradually along NE. slope.
- 76.80 Enter dense timber, bears N. and S.
- 80.08 Intersect the W. bdy. of sec. 28, North, 3.16 chs. dist. from the cor. of secs. 28 and 33.

At point of intersection, on gradual NE. slope, in dense timber, 80 ft. below the $\frac{1}{4}$ sec. cor.

Set an iron post, 3 ft. long, 2 ins. in diam., 30 ins. in the ground, for closing cor. of secs. 29 and 32, with brass cap marked

INDEPENDENT RESURVEY OF SUBDIVISION T. 10 N., R. 5 E.

Chains



1938

From which

A balsam, 12 ins. diam., bears S. 48° W.; 76 lks. dist., marked T10N R5E S32 CC BT.

A balsam, 5 ins. diam., bears N. 18°30' W., 16 lks. dist., marked T10N R5E S29 CC BT.

Land, high and mountainous, with a general easterly exposure and drainage.
 Soil, shallow clay and gravel, with a rocky surface; 4th rate.
 Undergrowth, sagebrush, mountain laurel, mahogany, dwarf timber, browse, weeds, and grass.
 Timber, aspen, balsam, and spruce, on portions of mile.
 Good grazing land.

From the cor. of secs. 29, 30, 31, and 32.
 West, on true line, bet. secs. 30 and 31.

Ascend gradual NE. slope of high mountainous land, through medium dense timber and undergrowth.


3.70 Ascent becomes abrupt, bears NW. and SE.

11.30 Ascent becomes gradual, bears NW. and SE.

19.27 Intersect the E. bdy. of sec. 25, T. 10 N., R. 4 E., N. 0°27' W., 25 lks. dist. from the cor. of secs. 25 and 36;

At point of intersection, on NE. slope, 380 ft. above the cor. of secs. 29, 30, 31, and 32.

Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, for closing cor. of secs. 30 and 31, T. 10 N., R. 5 E., with brass cap marked



1938

From which

A white pine, 12 ins. diam., bears N. 30° E., 17 lks. dist., marked T10N R5E S30 CC BT.

A white pine, 12 ins. diam., bears S. 40° E., 48 lks. dist., marked T10N R5E S31 CC BT.

Land, high and mountainous, with a general northeasterly exposure and drainage.
 Soil, shallow and deep clay with a rocky surface; 4th rate.
 Timber, aspen, balsam, spruce, and white pine.
 Undergrowth, sagebrush, mountain laurel, dwarf timber, browse, weeds, and grass.
 Good grazing land.

INDEPENDENT RESURVEY OF SUBDIVISION, T. 10 N., R. 5 E.

Chains

- From the cor. of secs. 29, 30, 31, and 32.
 N. 0°01' W., bet. secs. 29 and 30.
 Descend gradual NE. slope of high mountainous land,
 through dense timber and undergrowth.
- 3.60 Descent becomes abrupt, bears NW. and SE.
- 7.50 Ravine, 210 ft. below cor., drains S. 80° E.; ascend steep SE. slope.
- 12.30 Leave timber, bears E. and W.
- 19.00 Slope changes from a steep SE. slope to a steep E. slope.
- 27.50 Enter dense timber, bears NE. and W.
- 36.50 Spur, 280 ft. above ravine, projects SE.; descend steep NE. slope.
- 40.00 On steep NE. slope, 40 ft. below spur.
 Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, for $\frac{1}{4}$ sec. cor. secs. 29 and 30, with brass cap marked

S30	S29
-----	-----

1938

From which

A Douglas fir, 14 ins. diam., bears S. 3° E., 251 lks. dist., marked $\frac{1}{4}$ S29 BT.

A Douglas fir, 18 ins. diam., bears S. 1° W., 213 lks. dist., marked $\frac{1}{4}$ S30 BT.

- 43.70 Ravine, 120 ft. below the $\frac{1}{4}$ sec. cor., drains N. 80° E.; ascend steep SE. slope.
- 46.30 Small spur, 50 ft. above ravine, projects SE.; descend gradual NE. slope.
- 52.90 Ravine, 130 ft. below spur, drains SE.; ascend steep SW. slope.
- 69.30 Ridge, 350 ft. above ravine, bears E. and N. 70° W.; descend gradual NE. slope.
- 78.20 Ravine, 50 ft. below ridge, drains S. 70° E.; ascend gradual SW. slope.
- 80.00 On gradual SW. slope, 20 ft. above ravine.
 Set an iron post, 3 ft. long, 2 ins. in diam., 30 ins. in the ground, for cor. of secs. 19, 20, 29, and 30, with brass cap marked

T10N	R5E
S19	S20

S30	S29
-----	-----

1938

From which

INDEPENDENT SURVEY OF SUBDIVISION, T. 39 N., R. 5 E.

CHAIN

A spruce, 12 ins. diam., bears N. $87^{\circ}30'$ E., 179 lks. dist., marked T10N R5E S20 BT.

An aspen, 5 ins. diam., bears S. 8° E., 79 lks. dist., marked T10N R5E S29 BT.

A spruce, 10 ins. diam., bears S. $64^{\circ}30'$ W., 90 lks. dist., marked T10N R5E S30 BT.

An aspen, 7 ins. diam., bears N. 59° W., 46 lks. dist., marked T10N R5E S19 BT.

Land, high and mountainous, with a general westerly exposure and drainage.

Soil, shallow clay and gravel, with a rocky surface; 4th rate.

Timber, aspen, spruce, balsam, Douglas fir, and white pine.

Undergrowth, sagebrush, mountain laurel, mahogany, weeds, and grass.

Good grazing land.

East, on random line, bet. secs. 20 and 29.

40.00 Set temp. $\frac{1}{2}$ sec. cor.

80.18 Intersect the W. bdy. of sec. 21, 5 lks. S. of the cor. of secs. 20 and 29.

Thence

S. $89^{\circ}58'$ W., on true line, bet. secs. 20 and 29.

Ascend gradual NE. slope of high mountainous land, through dense timber and undergrowth.

1.10 Spur, 50 ft. above cor., projects S. 60° E.; ascend gradual SE. slope.

27.70 Head of ravine, 200 ft. above spur, drains S. 70° E.; ascend gradual NE. slope.

40.09 On gradual NE. slope, 310 ft. above head of ravine.

Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, for $\frac{1}{2}$ sec. cor. secs. 20 and 29, with brass cap marked

S20

S29

1938

Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.

No suitable bearing trees available.

11.00 Spur, 10 ft. above the $\frac{1}{2}$ sec. cor., slopes S. 30° E.; ascend steep SE. slope.

42.00 Ascent becomes more gradual; bears NE. and SW.

70.30 Bend in top of ridge, 310 ft. above the $\frac{1}{2}$ sec. cor., bears N. 75° W. and E. 75° E.; descend gradual SW. slope.

80.18 The cor. of secs. 19, 20, 29, and 30, 50 ft. below bend in top of ridge.

INDEPENDENT RESURVEY OF SUBDIVISION, T. 10 N., R. 5 E.

Chains

Land, high and mountainous, with a general easterly exposure and drainage.
 Soil, shallow gravel and clay, with a rocky surface; 4th rate.
 Timber, aspen, spruce, balsam, Douglas fir, and white pine.
 Undergrowth, sagebrush, mountain laurel, dwarf timber, mahogany, service berry, browse, weeds, and grass.
 Good grazing land.


West, on true line, bet. secs. 19 and 30.

Descend gradual SW. slope of high mountainous land, through dense timber and undergrowth.

- 2.50 Ravine, 10 ft. below cor., drains S. 70° E.; ascend gradual NE. slope.
- 5.00 The center of a large sink hole containing water, bears North, 2.00 chs. dist.
- 8.00 Ridge, 30 ft. above ravine, bears NW. and SE.; descend gradual SW. slope.
- 19.76 Intersect the E. bdy. of sec. 24, T. 10 N., R. 4 E., N. 0°27' W., 75 lks. dist. from the cor. of secs. 24 and 25.

At point of intersection, on SW. slope, 60 ft. below ridge.

Set an iron post, 3 ft. long, 2 ins. in diam., 30 ins. in the ground, for closing cor. of secs. 19 and 30, T. 10 N., R. 5 E., with brass cap marked



1938

From which

- An aspen, 9 ins. diam., bears N. 44°15' E., 51 lks. dist., marked T10N R5E S19 CC BT.
- A balsam, 10 ins. diam., bears S. 22°30' E., 130 lks. dist., marked T10N R5E S30-CC BT.

Land, high and mountainous, with a general easterly exposure and drainage.
 Soil, shallow clay and gravel, with a rocky surface; 4th rate.
 Timber, aspen, balsam, spruce, Douglas fir, and white pine.
 Undergrowth, sagebrush, mountain laurel, weeds, and grass.
 Good grazing land.

At midpoint bet. closing cors. on the W. bdy. of sec. 30.

Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, for $\frac{1}{2}$ sec. cor. sec. 30, T. 10 N., R. 5 E., with brass cap marked



1938

INDEPENDENT RESURVEY OF SUBDIVISION, T. 10 N., R. 5 E.

Chains

From which

An aspen, 5 ins. diam., bears N. 89° E., 32 lks. dist., marked $\frac{1}{4}$ S30 BT.

An aspen, 4 ins. diam., bears S. 55° E., 67 lks. dist., marked $\frac{1}{4}$ S30 BT.

From this cor., the $\frac{1}{4}$ sec. cor. sec. 25, T. 10 N., R. 4 E. bears S. 0°27' E., 50 lks. dist.

From the closing cor. of secs. 20 and 21.

West, on a random sectional correction line, along the N. bdy. of sec. 20.

39.10 Set temp. $\frac{1}{4}$ sec. cor. sec. 17.

40.00 Set temp. $\frac{1}{4}$ sec. cor. sec. 20.

79.10 Set temp. cor. of secs. 17 and 18.

30.00 Set temp. cor. of secs. 19 and 20.

From the temp. cor. of secs. 19 and 20.

S. 0°01' E., on random line, bet. secs. 19 and 20.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

78.18 Fall 10 lks. E. of the cor. of secs. 19, 20, 29, and 30.

Thence, from the cor. of secs. 19, 20, 29, and 30.

N. 0°01' W., on true line, bet. secs. 19 and 20.

Ascend gradual SW. slope of high mountainous land, through dense timber and undergrowth.

8.80 Ridge, 80 ft. above cor., bears NW. and SE.; descend gradual NE. slope.

18.70 Slope changes from a gradual NE. slope to a steep N. slope

27.50 Draw, 290 ft. below ridge, drains E., 3.00 chs. dist., thence SE.; ascend gradual SE. slope.

28.70 The SE. point of limestone outcropping, 10 ft. above draw; descend gradual NE. slope.

31.00 Ravine, 10 ft. below the SE. point of limestone outcropping drains SE., 4.00 chs. dist. to junction with last draw; ascend gradual SW. slope.

40.00 On gradual SW. slope, 160 ft. above ravine.

Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, for $\frac{1}{4}$ sec. cor. secs. 19 and 20, with brass cap marked

$\frac{1}{4}$ S19 | S20
1938

From which

A balsam, 9 ins. diam., bears S. 84°45' E., 13 lks.

INDEPENDENT RESURVEY OF SUBDIVISION, T. 10 N., R. 5 E.

Chains

- dist., marked $\frac{1}{4}$ S20 BT.
- A balsam, 9 ins. diam., bears N. $25^{\circ}30'$ W., 23 lks. dist., marked $\frac{1}{4}$ S19 BT.
- 42.70 Spur, 30 ft. above the $\frac{1}{4}$ sec. cor., projects E.; descend steep N. slope.
- 58.80 Six Bit Hollow, 180 ft. below spur, drains E.; ascend gradual S. slope,
- 60.40 The W. edge of an old saw mill location.
- 63.10 The SW. cor. of an old frame cabin, bears East, 30 lks. dist.
- 68.70 Six Bit Spring, a small spring of good clear water in center of small swamp, bears East, 50 lks. dist.
- 74.10 Ridge, 130 ft. above hollow, bears E. and W.; descend gradual N. slope.
- 75.50 Forest Service trail, bears N. 70° W. and S. 60° E.
- 78.18 Intersect the S. bdy. of sec. 18, West, 1.00 chs. dist. from the cor. of secs. 17 and 18, hereinafter described.

At point of intersection, on gradual N. slope, 30 ft. below ridge.

Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in the ground, for closing cor. of secs. 19 and 20, with brass cap marked

T10N R5E
S18

S19 | S20
CC

1938

From which

A balsam, 5 ins. diam., bears S. 61° E., 23 lks. dist., marked T10N R5E S20 CC BT.

A balsam, 7 ins. diam., bears S. 31° W., 24 lks. dist., marked T10N R5E S19 CC BT.

Land, high and mountainous, with a general easterly exposure and drainage.

Soil, shallow clay and gravel, with a rocky surface; 4th rate.

Timber, aspen, spruce, Douglas fir, and balsam.

Undergrowth, sagebrush, mountain laurel, weeds, and grass.

Good grazing land.

From the cor. of secs. 16 and 17.

West, on a sectional correction line, along the S. bdy. of sec. 17.

Ascend gradually along steep N. slope of mountainous land, through very dense timber and undergrowth.

0.90 The closing cor. of secs. 20 and 21.

354

INDEPENDENT RESURVEY OF SUBDIVISION, T. 10 N., R. 5 E.

Chains

15.90 Center Fork Big Creek, dry, 100 ft. above cor., drains N. 30° E., 50 lks. dist., thence easterly; ascend steep SE slope.

32.30 Slope changes from a steep SE. slope to a steep S. slope.

40.00 On steep S. slope, 480 ft. above Center Fork Big Creek.

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ sec. cor. sec. 17, with brass cap marked

$\frac{1}{4}$ S17

1938

From which

A balsam, 10 ins. diam., bears N. 42° E., 33 lks. dist., marked $\frac{1}{4}$ S17 BT.

A spruce, 30 ins. diam., bears N. 68° 30' W., 135 lks. dist., marked $\frac{1}{4}$ S17 BT.

40.95 Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for $\frac{1}{4}$ sec. cor. sec. 20, with brass cap marked

$\frac{1}{4}$ S20

1938

From which

A white pine, 20 ins. diam., bears S. 5° E., 62 lks. dist., marked $\frac{1}{4}$ S20 BT.

A balsam, 9 ins. diam., bears S. 85° W., 56 lks. dist., marked $\frac{1}{4}$ S20 BT.

44.90 Recross Center Fork Big Creek, dry, 10 ft. below the $\frac{1}{4}$ sec. cor. sec. 17, drains S. 20° E., 2.00 chs. dist., thence easterly; ascend gradually along steep N. slope.

80.00 On steep N. slope, 110 ft. above Center Fork Big Creek.

Set an iron post, 3 ft. long, 2 ins. in diam., 30 ins. in the ground, for cor. of secs. 17 and 18, with brass cap marked

T10N | R5E
S18 | S17

S20

1938

From which

A lodge pole pine, 10 ins. diam., bears N. 15° E., 40 lks. dist., marked T10N R5E S17 BT.

A balsam, 16 ins. diam., bears N. 4° W., 33 lks. dist., marked T10N R5E S18 BT.

Land, broken and mountainous, with a general easterly exposure and drainage. Soil, shallow clay and gravel, with a rocky surface; 4th rate.

INDEPENDENT RESURVEY OF SUBDIVISION, T. 10 N., R. 5 E.

Chains

Timber, aspen, spruce, Douglas fir, balsam, lodge pole and white pine.
Undergrowth, sagebrush, willows, mountain laurel, mahogany, browse, weeds, and grass.
Good grazing land.

West, on a sectional correction line, along the S. bdy. of sec. 18.

Ascend gradually along N. slope of high mountainous land, through dense timber and undergrowth.

- 1.00 The closing cor. of secs. 19 and 20.
- 6.50 Forest Service trail, bears S. 30° E. and N. 30° W.
- 17.50 Ridge, 140 ft. above the cor. of secs. 17 and 18, bears N. 80° W. and S. 80° E.; descend gradual SW. slope.
- 21.21 Intersect the E. bdy. of sec. 24, T. 10 N., R. 4 E., S. 0°27' E., 56 lks. dist. from the cor. of secs. 13 and 24.

At point of intersection, on gradual SW. slope, 20 ft. below top of ridge.

Set an iron post, 3 ft. long, 2 ins. in diam., 30 ins. in the ground, for closing cor. of secs. 18 and 19, with brass cap marked

T10N	T10N	
R4E	S18	C
S24	S19	C
	R5E	

1938

From which

A balsam, 12 ins. diam., bears N. 50° E., 296 lks. dist., marked T10N R5E S18 CC BT.

A balsam, 10 ins. diam., bears S. 88° E., 354 lks. dist., marked T10N R5E S19 CC BT.

Land, high and mountainous, with a general northeasterly exposure and drainage.
Soil, deep clay and sand, with gravel and rock; 4th rate.
Timber, aspen, balsam, Douglas fir, lodge pole and white pine.
Undergrowth, mountain laurel, sagebrush, weeds, and grass.
Good grazing land.

At a point on the E. bdy. of sec. 24, T. 10 N., R. 4 E., which is N. 0°27' W., 40.00 chs. dist. from the closing cor. of secs. 19 and 30, T. 10 N., R. 5 E.

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for 1/4 sec. cor. sec. 19, T. 10 N., R. 5 E., with brass cap marked

1/4 S19

1938

From which

INDEPENDENT RESURVEY OF SUBDIVISION, T. 10 N., R. 5 E.

Chains

A spruce, 18 ins. diam., bears S. 52° E., 15 lks. dist., marked $\frac{1}{4}$ S19 BT.

No other suitable bearing tree available.

From this cor., the $\frac{1}{4}$ sec. cor. sec. 24, T. 10 N., R. 4 E. bears S. 0°27' E., 1.00 chs. dist.


From the cor. of secs. 17 and 18.

N. 0°02' W., bet. secs. 17 and 18.

Descend gradual N. slope of high rolling mountainous land, through dense timber and undergrowth.

- 1.20 Ravine, 40 ft. below cor., drains E.; large sink hole with water, in bottom of ravine at this point; ascend gradual S. slope.
- 6.40 Spur, 280 ft. above ravine, projects S. 60° E.; descend gradual NE. slope.
- 12.30 Draw, 30 ft. below spur, drains SE.; ascend gradual SW. slope.
- 17.40 Slope changes from a gradual SW. slope to a gradual S. slope.
- 27.30 Ridge, 170 ft. above draw, bears E. and N. 80° W.; descend gradual N. slope.
- 35.70 Slope changes from a gradual N. slope to a gradual NW. slope.
- 40.00 On gradual N. slope, 140 ft. below ridge.

Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, for $\frac{1}{4}$ sec. cor. secs. 17 and 18, with brass cap marked



From which

A spruce, 12 ins. diam., bears N. 71° E., 14 lks. dist., marked $\frac{1}{4}$ S17 BT.

A Douglas fir, 8 ins. diam., bears S. 17° W., 29 lks. dist., marked $\frac{1}{4}$ S18 BT.

- 41.70 Ravine, 50 ft. below the $\frac{1}{4}$ sec. cor., drains NE.; ascend gradual SE. slope.
- 46.40 Spur, 20 ft. above ravine, projects N. 70° E.; descend gradual N. slope.
- 52.00 Draw, 70 ft. below spur, drains E.; ascend steep S. slope.
- 60.40 Spur, 70 ft. above draw, projects E.; descend gradual NE. slope.
- 62.50 Limestone outcropping, bears SE. and W.
- 68.30 Ravine, 70 ft. below spur, drains SE.; ascend gradual SW. slope.

INDEPENDENT RESURVEY OF SUBDIVISION, T. 10 N., R. 5 E.

Chains

72.40 Ridge, 40 ft. above ravine, bears W. and S. 70° E.; descend gradual N. slope.

80.00 On gradual N. slope, 50 ft. below ridge.

Set an iron post, 3 ft. long, 2 ins. in diam., 30 ins. in the ground, for cor. of secs. 7, 8, 17, and 18, with brass cap marked

T10N	R5E
S7	S8

S18	S17
-----	-----

1938

From which

A spruce, 14 ins. diam., bears N. $14^{\circ}45'$ E., 58 lks. dist., marked T10N R5E S8 BT.

An Alpine fir, 7 ins. diam., bears S. 13° E., 68 lks. dist., marked T10N R5E S17 BT.

An Alpine fir, 16 ins. diam., bears S. $88^{\circ}15'$ W., 48 lks. dist., marked T10N R5E S18 BT.

An Alpine fir, 10 ins. diam., bears N. $24^{\circ}45'$ W., 168 lks. dist., marked T10N R5E S7 BT.

Land, high and mountainous, with a general easterly exposure and drainage.

Soil, shallow dark loam, with a rocky surface; 3rd rate. Undergrowth, mountain laurel, sagebrush, dwarf timber, browse, weeds, and grass. Good grazing land.

East, on **random** line, bet. secs. 8 and 17.

40.00 Set temp. 4 sec. cor.

80.12 Intersect the cor. of secs. 8, 9, 16, and 17.

Thence:

West, on true line, bet. secs. 8 and 17.

Ascend steep SE. slope of mountainous land, through dense timber and undergrowth.

12.50 Slope changes from an abrupt SE. slope to a gradual E. slope.

20.70 Spur, 430 ft. above cor., projects S.; descend gradually over rolling W. slope.

34.10 Ravine, 150 ft. below spur, drains S.; ascend gradual E. slope.

39.00 Spur, 40 ft. above ravine, projects S. 10° E.; descend gradual W. slope.

40.06 On gradual W. slope. 10 ft. below spur.

Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, for 4 sec. cor. secs. 8 and 17, with brass cap marked

INDEPENDENT RESURVEY OF SUBDIVISION, T. 10 N., R. 5 E.

Chains

$\frac{1}{4}$ S8

$\frac{1}{4}$ S17

1938

From which

An Alpine fir, 6 ins. diam., bears N. 31° 30' E., 38 lks. dist., marked $\frac{1}{4}$ S8 BT.

An Alpine fir, 9 ins. diam., bears S. 25° W., 34 lks. dist., marked $\frac{1}{4}$ S17 BT.

- 50.00 Draw, 190 ft. below the $\frac{1}{4}$ sec. cor., drains S. 20° W.; ascend abrupt E. slope.
- 52.20 The E. point of limestone spur, slopes E. from S. 80° W.; thence along gradual N. slope.
- 59.80 Draw, 50 ft. above last draw, drains NE.; ascend gradually.
- 65.60 Recross draw, 30 ft. below last crossing, drains S. 70° E.; ascend gradually along rolling N. slope.
- 80.12 The cor. of secs. 7, 8, 17, and 18, 100 ft. above draw.

Land, broken and mountainous, with a general easterly exposure and drainage.
 Soil, shallow dark loam with gravel; 4th rate.
 Timber, aspen, spruce, balsam, Alpine and Douglas fir, and white pine.
 Undergrowth, mountain laurel, sagebrush, dwarf timber, willows; browse, weeds, and grass.
 Good grazing land.

West, on true line, bet. secs. 7 and 18.

Ascend gradually along rolling N. slope of high mountainous land, at the S. side of ravine draining easterly, through dense timber and undergrowth.

- 20.20 Intersect a large sink hole, about 20 ft. deep.
- 21.82 Intersect the E. bdy. of sec. 13, T. 10 N., R. 4 E., S. 0° 27' E., 14 lks. dist. from the cor. of secs. 12 and 13.

At point of intersection, on gradual NE. slope, 120 ft. above the cor. of secs. 7, 8, 17, and 18.

Set an iron post, 3 ft. long, 2 ins. in diam., 30 ins. in the ground, for closing cor. of secs. 7 and 18, T. 10 N., R. 5 E., with brass cap marked

	T10N	
T10N		T10N
R4E		S7
S13		S18
		R5E

1938

From which

A lodge pole pine, 8 ins. diam., bears N. 47° 30' E., 28 lks. dist., marked T10N R5E S7 CC BT.

INDEPENDENT RESURVEY OF SUBDIVISION' T. 10 N., R. 5 E.

Chains

A Douglas fir, 30 ins. diam., bears S. 66° E., 79 lks. dist., marked TION R5E S18 CC BT.

Land, high and mountainous with a general northeasterly exposure and drainage.

Soil, shallow dark mountain loam; 3rd rate.

Timber, aspen, balsam, spruce, Douglas fir, and lodge pole pine.

Undergrowth, dwarf timber, weeds, and grass.

Good grazing land.

At midpoint bet. closing cors. on the W. bdy. of sec. 13, T. 10 N., R. 5 E.

Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, for $\frac{1}{4}$ sec. cor. sec. 13, T. 10 N., R. 5 E., with brass cap marked

$\frac{1}{4}$ S18

1938

From which

A balsam, 10 ins. diam., bears N. 43° E., 4 lks. dist., marked $\frac{1}{4}$ S18 BT.

A balsam, 11 ins. diam., bears S. 21° E., 25 lks. dist., marked $\frac{1}{4}$ S18 BT.

From this cor., the $\frac{1}{4}$ sec. cor. sec. 13, T. 10 N., R. 4 E., bears N. $0^{\circ}27'$ W., 35 lks. dist.

From the cor. of secs. 7, 8, 17, and 18.

N. $0^{\circ}02'$ W., bet. secs. 7 and 8.

Descend gradual N. slope of high rolling mountainous land, through dense timber and undergrowth.

- 3.70 Draw, 40 ft. below cor., drains S. 85° E.; ascend gradual S. slope.
- 10.30 Spur, 90 ft. above draw, projects E.; descend gradual N. slope.
- 25.90 Ravine, 110 ft. below spur, drains E.; ascend gradual S. slope.
- 40.00 On gradual S. slope, 130 ft. above ravine.
- Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, for $\frac{1}{4}$ sec. cor. secs. 7 and 8, with brass cap marked

$\frac{1}{4}$

S7 | S8

1938

From which

A balsam, 15 ins. diam., bears N. $62^{\circ}30'$ E., 69 lks. dist., marked $\frac{1}{4}$ S8 BT.

360

INDEPENDENT RESURVEY OF SUBDIVISION, T. 10 N., R. 5 E.

Chains

- A balsam, 8 ins. diam., bears N. 82° W., 63 lks. dist., marked S7 BT.
- 31.30 Top of main divide ridge of the Wasatch Mountain Range, 260 ft. above the 4 sec. cor., bears SE. and N. 30° W.; descend steep NE. slope.
- 34.10 Improved Forest Service road, bears N. 30° W. and SE.
- 36.00 On steep NE. slope, 200 ft. below top of divide ridge. Set an iron post, 3 ft. long, 2 ins. diam., 30 ins. in ground, for cor. of secs. 5, 6, 7, and 8, with brass cap marked

T10N	R5E
S6	S5
S7	S8

1933

From which

- An Alpine fir, 20 ins. diam., bears N. 11°45' E., 28 lks. dist., marked T10N R5E S5 BT.
- A Douglas fir, 14 ins. diam., bears S. 39° E., 48 lks. dist., marked T10N R9E S3 BT.
- An Alpine fir, 11 ins. diam., bears S. 48° W., 22 lks. dist., marked T10N R9E S7 BT.
- A Douglas fir, 9 ins. diam., bears N. 65° W., 105 lks. dist., marked T10N R5E S6 BT.

Land, high and mountainous, with a general southerly and northeasterly exposure and drainage. Soil, shallow dark clay loam, with a rocky surface; 4th rate. Timber, aspen, spruce, lodge pole pine, balsam, Douglas fir, and Alpine fir. Undergrowth, sagebrush, dwarf timber, service berry, browse, weeds, and grass. Good grazing land.

East, on random line, bet. secs. 5 and 8.

37.00 Set temp. 4 sec. cor.

37.12 Intersect the cor. of secs. 4, 5, 8, and 9.

Thence,

West, on true line, bet. secs. 5 and 8.

Ascend gradual SE. slope of high mountainous land, through dense timber and undergrowth.

38.40 Spur, 130 ft. above cor., projects NE.; descend gradual NW. slope.

38.50 Head of ravine, 20 ft. below spur, drains N. 30° E.; ascend steep NE. slope of main divide ridge of the Wasatch Mountain Range.

39.50 Improved Forest Service road; bears N. 30° E. and S. 30° W.

INDEPENDENT RESURVEY OF SUBDIVISION T. 10 N., R. 5 E.

Chains

35.30 Spur, 320 ft. above head of ravine, slopes S. 30° E.; descend gradual SW. slope.

40.06 On gradual SW. slope, 20 ft. below spur.

Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, for $\frac{1}{4}$ sec. cor. secs. 5 and 8, with brass cap marked

S5

S8

1938

From which

An aspen, 5 ins. diam., bears S. 17°30' E., 18 lks. dist., marked $\frac{1}{4}$ S8 BT.

An Alpine fir, 4 ins. diam., bears N. 40°15' W., 45 lks. dist., marked $\frac{1}{4}$ S5 BT.

41.20 Head of ravine, 10 ft. below the $\frac{1}{4}$ sec. cor., drains SE.; ascend steep SE. slope.

49.00 Top of main divide ridge of the Wasatch Mountain Range, 150 ft. above head of ravine, bears N. and S. 20° W.; descend gradual W. slope.

50.40 From this point, U.S. Geological Survey triangulation station Red Spot, bears N. 3°15' W., 28.85 chs. dist. Station is a large scattered mound of stone, located on a high bare point on top of the main divide ridge of the Wasatch Mountain Range. Alongside mound of stone, lying on the ground, is a pine pole about 15 ft. long. At the center of the mound, I reset the pole in a mound of stone, 8 ft. base, 5 ft. high. Station is reported as being in latitude 41°37'54.47" N., and longitude 111°24'40.46" W., and at an elevation of 8,885 ft. above sea level.

67.80 Improved Forest Service road, bears N. 5° W. to the Curtis Creek Rancher Station, and S. 5° W. to Randolph, Utah.

75.00 Head of draw, 380 ft. below top of divide ridge, drains N. 20° W.; ascend gradual NE. slope.

80.12 The cor. of secs. 5, 6, 7, and 8, 70 ft. above head of draw.

Land, high and mountainous, with a general easterly and westerly exposure and drainage.

Soil, shallow clay and gravel, with a rocky surface; 4th rate.

Timber, aspen, balsam, lodge pole pine, spruce, Douglas and Alpine fir.

Undergrowth, sagebrush, dwarf timber, weeds, and grass. Good grazing land.

West, on true line, bet. secs. 6 and 7.

Ascend gradual NE. slope of rolling mountainous land, through very dense timber and undergrowth.

7.80 Head of ravine, drains NW.; continue ascent over general NE. slope.

INDEPENDENT RESURVEY OF SUBDIVISION, T. 10 N., R. 5 E.

Chains

22.37

Intersect the E. bdy. of sec. 1, T. 10 N., R. 4 E. N. $0^{\circ}27'$ W., $\frac{3}{8}$ lks. dist. from the cor. of secs. 1 and 12.

At point of intersection, on general NE. slope, 130 ft. above the cor. of secs. 5, 6, 7, and 8.

Set an iron post, 3 ft. long, 2 ins. in diam., 30 ins. in the ground, for closing cor. of secs. 6 and 7, T. 10 N., R. 5 E., with brass cap marked

	T10N	
T10N		T10N
R4E		S6
S1		S7
		R5E
		C
		C

1938

From which.

A lodge pole pine, 6 ins. diam., bears N. $2^{\circ}15'$ E., 13 lks. dist., marked T10N R5E S6 CC BT.

A balsam, 6 ins. diam., bears S. $30^{\circ}30'$ E., 35 lks. dist., marked T10N R5E S7 CC BT.

Land, high and mountainous, with a general northeasterly exposure and drainage.

Soil, dark clay loam; 3rd rate.

Timber, aspen, lodge pole pine, balsam, spruce, Douglas fir, and Alpine fir.

Undergrowth, dwarf timber, weeds, and grass.

Good grazing land.

At midpoint bet. closing cors. on the W. bdy. of sec. 7, T. 10 N., R. 5 E.

Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, for $\frac{1}{4}$ sec. cor. sec. 7, T. 10 N., R. 5 E., with brass cap marked

$\frac{1}{4}$ S7

1938

From which

A balsam, 8 ins. diam., bears N. 48° E., 126 lks. dist., marked $\frac{1}{4}$ S7 BT.

An aspen, 4 ins. diam., bears S. 30° E., 32 lks. dist., marked $\frac{1}{4}$ S7 BT.

From this cor., the $\frac{1}{4}$ sec. cor. in sec. 12, T. 10 N., R. 4 E., bears S. $0^{\circ}27'$ E., 11 lks. dist.

At a point on the W. bdy. of sec. 6, T. 10 N., R. 5 E., which is N. $0^{\circ}27'$ W., 40.00 chs. dist. from the closing cor. of secs. 6 and 7.

Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, for $\frac{1}{4}$ sec. cor. sec. 6, T. 10 N., R. 5 E., with brass cap marked

$\frac{1}{4}$ S6

1938

INDEPENDENT RESURVEY OF SUBDIVISION, T. 10 N., R. 5 E.

Chains

From which

A balsam, 6 ins. diam., bears N. 84° E., 179 lks. dist., marked 1/4 S6 BT.

A balsam, 6 ins. diam., bears S. 58° E., 163 lks. dist., marked 1/4 S6 BT.

From this cor., the 1/4 sec. cor. sec. 1, T. 10 N., R. 4 E., bears S. 0°27' E., 61 lks. dist.

From the cor. of secs. 5, 6, 7, and 8.

N. 0°02' W., on true line, bet., secs. 5 and 6.

Descend gradually over general NE. slope of mountainous land, through dense timber and undergrowth.

9.80 Draw, 130 ft. below cor., drains NW.; ascend gradual SW. slope of main divide ridge of the Wasatch Mountain Range.

22.20 Improved Forest Service road, bears NW. to Curtis Creek Ranger Station, and SE. to Randolph, Utah.

40.00 On general SW. slope, 140 ft. above draw.

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground, for 1/4 sec. cor. secs. 5 and 6, with brass cap marked

S6 | S5

1938

From which

A lodge pole pine, 12 ins. diam., bears N. 54° E., 19 lks. dist., marked 1/4 S5 BT.

A balsam, 15 ins. diam., bears N. 33°30' W., 31 lks. dist., marked 1/4 S6 BT.

45.60 A blazed Forest Service trail, bears N. 70° E. and S. 70° W.

75.00 Rolling top of ridge, 160 ft. above the 1/4 sec. cor., bears E. and W.; descend gradual N. slope.

79.37 Intersect the S. bdy. of sec. 32, T. 11 N., R. 5 E., N. 89°24' E., 3.09 chs. dist. from the cor. of secs. 31 and 32.

At point of intersection, on gradual N. slope, 5 ft. below top of ridge.

Set an iron post, 3 ft. long, 2 ins. in diam., 30 ins. in the ground, for closing cor. of secs. 5 and 6, T. 10 N., R. 5 E., with brass cap marked

T11N R5E
S32

S6 | S5
T10N | R5E
C C

1938

INDEPENDENT RESURVEY OF SUBDIVISION, T. 10 N., R. 5 E.

Chains

From which

A spruce, 24 ins. diam., bears S. 64° E., 48 lks. dist., marked T10N R5E S5 CC BT.

A spruce, 12 ins. diam., bears S. $64^{\circ}30'$ W., 78 lks. dist., marked T10N R5E S6 CC BT.

Land, high and mountainous, with a general southwesterly exposure and drainage.

Soil, shallow dark clay loam. with a rocky surface; 4th rate.

Timber, aspen, balsam, lodge pole pine, spruce, Douglas and Alpine fir.

Undergrowth, sagebrush, dwarf timber, service berry, mountain laurel, browse, weeds, and grass.

Good grazing land.

At midpoint bet. closing cors. on the N. bdy. of sec. 5, T. 10 N., R. 5 E.

Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, for $\frac{1}{4}$ sec. cor. sec. 5, T. 10 N., R. 5 E., with brass cap marked

1.35

1938

From which

A lodge pole pine, 11 ins. diam., bears S. 37° E., 23 lks. dist., marked $\frac{1}{4}$ S5 BT.

A lodge pole pine, 12 ins. diam., bears S. $58^{\circ}30'$ W., 15 lks. dist., marked $\frac{1}{4}$ S5 BT.

From this cor., the $\frac{1}{4}$ sec. cor. sec. 32, T. 11 N., R. 5 E. bears N. $89^{\circ}07'$ W., 2.37 chs. dist.

SUBDIVISION OF SECTIONS, T. 10 N., R. 5 E.

Note: A partial subdivision was made of secs. 10, 11, 14, and 15, to define the boundaries between privately owned lands and forest lands, and to show conflicting areas of appropriated lands located from corners of the Bailey and Burrill survey, with those located from corners of the Martineau survey of T. 10 N., R. 5 E. After defining the necessary center section and quarter section points of each section, in the regular manner, the courses and distances of the lines forming the boundaries between the appropriated lands and public lands were determined and monumented, and the record of these lines only are returned in these notes.

From the S. $1/16$ sec. cor. secs. 11 and 12.

S. $89^{\circ}40'$ W., on true E. and W. center line of the SE $\frac{1}{4}$ sec. 11.


39.74

True point for the center S. $1/16$ sec. cor. sec. 11.

Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, for center S. $1/16$ sec. cor. sec. 11, with brass cap marked

SUBDIVISION OF SECTIONS, T. 10 N., R. 5 E.

Chains



1938

Raise a mound of stone around the cor. monument.

Thence:

N. 89°43' W., on true E. and W. center line SW $\frac{1}{4}$ sec. 11.

39.78 The S. 1/16 sec. cor. secs. 10 and 11.


Subdivision of Section 10.

From the S. 1/16 sec. cor. secs. 10 and 11.

S. 89°58' W., on true E. and W. center line SE $\frac{1}{4}$ sec. 10.

39.74 True point for the center S. 1/16 sec. cor. sec. 10.

Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground and mound of stone, for the center S. 1/16 sec. cor. sec. 10, with brass cap marked



1938

Thence:

S. 0°31' W., on true E. and S. center line sec. 10.

20.18 The $\frac{1}{4}$ sec. cor. secs. 10 and 15.


Subdivision of Sec. 15.

From the $\frac{1}{4}$ sec. cor. secs. 10 and 15.

S. 1°39' E., on true N. and S. center line sec. 15.

39.04 True point for the center $\frac{1}{4}$ sec. cor. sec. 15.

Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, for the center $\frac{1}{4}$ sec. cor. sec. 15, with brass cap marked



1938

Raise a large mound of stone around the cor. monument

Thence:

S. 89°54' E., on true E. and W. center line sec. 15.

19.10 True point for the center E. 1/16 sec. cor. sec. 15.

SUBDIVISION OF SECTIONS, T. 19 N., R. 23 E., S. 2 S.

Chains

Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, for center E. 1/16 sec. cor. sec. 15, with brass cap marked

E 1/16

C ——— C

S15

1938

Raise a large mound of stone around the cor. monument.

Thence:

S. $2^{\circ}53'$ E., on true N. and S. center line of the SE $\frac{1}{4}$ sec. 15.

19.55 True point for the SE. 1/16 sec. cor. sec. 15.

Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, for the SE. 1/16 sec. cor. sec. 15, with brass cap marked

SE 1/16 S15

1938

Raise a large mound of stone around the cor. monument.

Thence:

S. $89^{\circ}38'$ E., on true E. and W. center line SE $\frac{1}{4}$ sec. 15.

19.52 The S. 1/16 sec. cor. of sec. 14 and 15.

From the N. 1/16 sec. cor. secs. 14 and 15.

N. $89^{\circ}59'$ W., on true E. and W. center line NE $\frac{1}{4}$ sec. 15.

19.50 True point for the NE. 1/16 sec. cor. sec. 15.

Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, for the NE. 1/16 sec. cor. sec. 15, with brass cap marked

NE 1/16 S15

1938

Raise a large mound of stone around the cor. monument.

Thence:

N. $0^{\circ}29'$ W., on true E. and S. center line NE $\frac{1}{4}$ sec. 15.

19.58 The E. 1/16 sec. cor. secs. 10 and 15.

Subdivision of Section 14.

From the $\frac{1}{2}$ sec. cor. secs. 14 and 15.

S. $89^{\circ}47'$ E., on true E. and W. center line of sec. 14.

41.26 The true point for the center $\frac{1}{2}$ sec. cor. sec. 14.

Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in

SUBDIVISION OF SECTIONS, T. 10 N., R. 5 E.

Chains

the ground, for center $\frac{1}{4}$ sec. cor. sec. 14, with brass cap marked

C $\frac{1}{4}$ S14

1938

Raise a mound of stone around the cor. monument.

Thence:

N. $1^{\circ}51'$ W., on true N. and S. center line sec. 14.

18.98 True point for the center N. $1/16$ sec. cor. sec. 14.

Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, for center N. $1/16$ sec. cor. sec. 14, with brass cap marked

C
N $1/16$ | S14
C

1938

Raise a large mound of stone around the cor. monument.

Thence:

N. $89^{\circ}28'$ E., on true E. and W. center line NE $\frac{1}{4}$ sec. 14.

38.98 The N. $1/16$ sec. cor. of secs. 13 and 14.

METES AND BOUNDS SURVEY OF PRIVATE CLAIMS, T. 10 N., R. 5 E.

Note: Tract segregations are made of all State selections and school sections located from the plat of the J.H. Martineau survey, that cannot be made to conform to the lines of the resurvey and that conflict with entries or State selections located from the plat of the Bailey and Burrill survey, of T. 10 N., R. 5 E.

State selections located from the plat of the J.H. Martineau survey, that do not conflict with State selections and entries located from the plat of the Bailey and Burrill survey, are made to conform to the lines of the resurvey, and are given a new description, as hereinafter shown.

TRACT 37

School section; embracing all of sec. 16, of the J.H. Martineau survey of T. 10 N., R. 5 E.

The SE., the SW., and the NW. corners of this tract, were found in place. The NE. corner of the tract was established under control of the SE. and NW. corners of the tract.

The tract is in conflict with appropriated lands in secs. 10 and 15 as follows.

The S $\frac{1}{2}$ SE $\frac{1}{4}$ sec. 10 to the extent of 5.09 acres.

The W $\frac{1}{2}$ NE $\frac{1}{4}$, SE $\frac{1}{4}$ NE $\frac{1}{4}$, and NE $\frac{1}{4}$ SE $\frac{1}{4}$ sec. 15 to the extent of 10.12 acres.

The NE $\frac{1}{4}$ NE $\frac{1}{4}$ sec. 15 to the extent of 13.63 acres.

There are no improvements on the tract and it consists of a rolling mountainous land which is only suitable for grazing. The North Fork Big Creek flows easterly through

METES AND BOUNDS SURVEY OF PRIVATE CLAIMS, T. 10 N., R. 5

Chains

the N. half of the tract, and it contains considerable pine and fir timber of commercial value.

The Martineau cor. of secs. 9, 10, 15, and 16, is missing therefore at a point, N. $89^{\circ}32'$ E., 80.36 chs. from the Martineau cor. of secs. 8, 9, 16, and 17, and N. $0^{\circ}46'$ E. 30.00 chs. from the Martineau cor. of secs. 15, 16, 21, and 22.

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground and mound of stone, for angle point No. 1, Tract 37 and angle point No. 2, Tract 38, with brass cap marked

T10N R5E

S10

AP1	AP2
TR37	TR38

1938

Thence, from the above cor.

S. $89^{\circ}32'$ W., along the N. bdy. of Tract 37 and through sec. 10.

29.67 Intersect the N. and S. center line of sec. 10, N. $0^{\circ}31'$ 1.59 chs. dist. from the $\frac{1}{4}$ sec. cor. secs. 10 and 15.

40.18 Find no trace of the Martineau $\frac{1}{4}$ sec. cor. secs. 9 and 16

67.66 Intersect the W. bdy. of sec. 10, North, 1.28 chs. dist. from the cor. of secs. 10 and 15.

30.36 The Martineau cor. of secs. 8, 9, 16, and 17, a sandstone, 14 x 10 x 4 ins., firmly set, marked 4 notches on E. and S. edges. A 2 in. iron pipe is found driven firmly in the ground alongside the cor. monument.

At the cor. point:

Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground and mound of stone, with the original cor. monument deposited at the base of the post, for angle point No. 2, Tract 37, with brass cap marked

T10N R5E

S16

AP2
TR37

1938

Thence:

S. $0^{\circ}52'$ W., along the W. bdy. of Tract 37.

40.00 Find no trace of the Martineau $\frac{1}{4}$ sec. cor. of secs. 16 and 17.

73.52 The Martineau cor. of secs. 16, 17, 20, and 21, a sandstone 12 x 10 x 4 ins., firmly set in the ground and mound of stone, marked 4 notches on E. edge and 3 notches on S. edge. Cor. has no accessories.

At the cor. point:

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground and mound of stone, with the original cor. monument deposited at the base of the post, for angle point No. 3, Tract 38, with brass cap marked

U. S. G. LAND BOUND SURVEY OF PRIVATE CLAIMS, T. 10 N., R. 5 E.

TION R5E

AP3

TR37

S16

1938

S. $89^{\circ}16'$ E., along the S. bdy. of Tract 37.

13.88 Intersect the line bet. secs. 15 and 16 of the resurvey, North, 20 lks. dist. from the cor. of sec's. 15, 16, 21, and 22.

40.00 Find no trace of the Martineau sec. cor. of secs. 16 and 21.

80.39 The Martineau cor. of secs. 15, 16, 21, and 22, a sandstone, $18 \times 16 \times 6$ ins., loosely set, marked 3 grooves on E. and S. faces. Cor. has no accessories.

At the cor. point:

Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground and mound of stone, with the original cor. monument deposited at the base of the post, for angle point No. 4, Tract 37, with brass cap marked

TION R5E

AP4

TR37

S15

1938

Thence:

N. $0^{\circ}46'$ E., along the E. bdy. of Tract 37.19.52 Intersect the E. and W. center line of the sec. 15, S. $89^{\circ}38'$ E., 7.65 chs. dist. from the SE. 1/16 sec. cor. of sec. 15.

40.00 Find no trace of the Martineau sec. cor. of sec. 15 and 16.

58.59 Intersect the E. and W. center line of the NE $\frac{1}{4}$ sec. 15, E. $89^{\circ}59'$ E., 9.33 chs. dist. from the NE. 1/16 sec. cor. of sec. 15.

60.00 Angle point No. 3, Tract 38, subsequently set at this point.

78.16 Intersect the line bet. secs. 10 and 15 of the resurvey, S. $89^{\circ}58'$ E., 9.75 chs. dist. from the E. 1/16 sec. cor. of secs. 10 and 15, and N. $89^{\circ}50'$ W., 10.16 chs. dist. from the cor. of secs. 10, 11, 14, and 15.

80.00 To angle point No. 1, Tract 37, identical with angle point No. 2, Tract 38, and place of beginning.

TRACT 38.

NW $\frac{1}{4}$ NW $\frac{1}{4}$ sec. 15, of the Martineau survey of T. 10 N., R. 5 E. State selection list 45, approved. Present claimants, the Randolph Land And Livestock Company.

Communication was made with Arch McKinnon, Secretary and

370

METES AND BOUNDS SURVEY OF PRIVATE CLAIMS, T. 10 N., R. 5 E.

Chains

Treasurer of the Randolph Land And Livestock Company, and I was informed that this tract was located with reference to the boundaries of Tract 37, or sec. 16 of the Martinez survey of T. 10 N., R. 5 E.

No improvements were found on the tract and its boundaries were not monumented. It consists of a rolling country which is suitable only for grazing purposes. The boundaries of the tract were made to conform to the bearings of the boundaries of Tract 37.

Tract 38 is in conflict with appropriated lands in secs. 10, 11, 14, and 15, as follows.

The S $\frac{1}{2}$ SE $\frac{1}{4}$ sec. 10 to the extent of 1.91 acres.
 The S $\frac{1}{2}$ SW $\frac{1}{4}$ sec. 11 to the extent of 2.10 acres.
 The NW $\frac{1}{4}$ of sec. 14 to the extent of 17.60 acres.
 The NE $\frac{1}{4}$ NE $\frac{1}{4}$ sec. 15 to the extent of 13.39 acres.

At a point, N. 89°32' E., 20.00 chs. dist. from angle point No. 1, Tract 37, identical with angle point No. 2, Tract 38.

Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground and mound of stone, for angle point No. 1, Tract 38, with brass cap marked

T10N R5E

S11

AP1
TR38

1938

Thence, from the above cor.

S. 89°32' W., along the N. bdy. of Tract 38.

9.75 Intersect the line bet. secs. 10 and 11 of the resurvey, N. 0°16' E., 1.92 chs. dist. from the cor. of secs. 10, 11, 14, and 15.

20.00 To angle point No. 2, Tract 38, identical with angle point No. 1, Tract 37.

Thence:

S. 0°16' W., along the W. bdy. of Tract 38 and the E. bdy. of Tract 37.

1.24 Intersect the line bet. secs. 10 and 15 of the resurvey, N. 39°50' W., 10.16 chs. dist. from the cor. of secs. 10, 11, 14, and 15, and S. 89°50' E., 9.75 chs. dist. from the E. 1/16 sec. cor. of secs. 10 and 15.

20.00 Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground and mound of stone, for angle point No. 3, Tract 38, with brass cap marked

T10N R5E

S15
AP3
TR38

S15

1938

Thence:

N. 89°32' E., along the S. bdy. of Tract 38.

10.14 Intersect the line bet. secs. 14 and 15 of the resurvey, N. 0°50' E., 1.48 chs. dist. from the N. 1/16 sec. cor.

CHAINS AND BOUNDS SURVEY OF PRIVATE CLAIMS, T. 10 N., R. 5 E.

- Chains
 20.00 of secs. 14 and 15, and S. $0^{\circ}50'$ W., 18.08 chs. dist. from the cor. of secs. 10, 11, 14, and 15.
- 20.00 Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground and mound of stone, for angle point No. 4, Tract 38, with brass cap marked
- T10N R5E
 APL4
 TR38
 314
 1938
- Thence:
 N. $0^{\circ}46'$ E., along the E. bdy. of Tract 38.
- 17.66 Intersect the line bet. secs. 11 and 14 of the resurvey, S. $38^{\circ}00'$ E., 9.24 chs. dist. from the cor. of secs. 10, 11, 14, and 15.
- 20.00 To angle point No. 1, Tract 38. and place of beginning.

TRACT 39.

$N\frac{1}{2}$ SE $\frac{1}{4}$ sec. 30, $N\frac{1}{2}$ SW $\frac{1}{4}$, SE $\frac{1}{4}$ SW $\frac{1}{4}$, and SW $\frac{1}{4}$ SE $\frac{1}{4}$ sec. 29, of the Martineau survey of T. 10 N., R. 5 E. State selection list 19, approved. Present claimant, the Randolph Land and Live Stock Company. Communication was made with Arch McKinnon, Secretary and Treasurer of said company, and I was informed that this tract was located from the corners of the Martineau survey of sec. 29.

No improvements were found on this tract and its boundaries were not monumented. It consists of a rolling mountainous country and is suitable for grazing purposes only. The W. portion of the tract was surveyed to conform to the W. bdy. of sec. 29. The boundaries of the remainder of the tract are determined by the subdivisional lines of sec. 29. The tract is not in conflict with any other State selection or appropriated lands.

At the point for the center $\frac{1}{4}$ sec. cor. sec. 29 of the Martineau survey of T. 10 N., R. 5 E.

Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground and mound of stone, for angle point No. 1, Tract 39, with brass cap marked.

T10N R5E
 S28
 APL1
 TR39

1938

Thence, from the above cor.

N. $88^{\circ}42'$ W., along the N. bdy. of Tract 39.

- 19.92 Point for the center W. $\frac{1}{16}$ sec. cor. of sec. 29 of the Martineau survey.
- 24.49 Intersect the line bet. secs. 28 and 29 of the resurvey, South, 77 lks. dist. from the $\frac{1}{4}$ sec. cor. E. bdy. sec. 29.
- 39.84 The Martineau $\frac{1}{4}$ sec. cor. secs. 29 and 30, a sandstone, 20 x 15 x 3 ins., loosely set, marked $\frac{1}{4}$ on W. face. Cor.

METES AND BOUNDS SURVEY OF PRIVATE CLAIMS, T. 10 N., R. 5

has no accessories.

At the cor. point:

Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground and mound of stone, with the original cor. monument deposited at the base of the post, for angle point No. 2, Tract 39, with brass cap marked

T10N R5E
S29

Ap2 TR39

1938

Thence:

N. 88°58' W., along the N. bdy. of Tract 39.

40.00 Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, and in a mound of stone, for angle point No. 3, Tract 39, with brass cap marked

T10N R5E

S29

AP3
TR39

1938

Thence:

S. 1°02' W., along the W. bdy. of Tract 39.

20.16 Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground and mound of stone, for angle point No. 4, Tract 39, with brass cap marked

T10N R5E

S29

AP4
TR39

1938

Thence:

S. 88°58' E., along the S. bdy. of Tract 39.

40.00 Point for the S. 1/16 sec. cor. secs. 29 and 30 of the Martineau Survey.

Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground and mound of stone, for angle point No. 5, Tract 39, with brass cap marked

T10N R5E
AP5 T39

S29

1938

Thence:

S. 88°47' E., on E. and W. center line of the SW $\frac{1}{4}$ of sec. 29, of the Martineau survey, along S. bdy. of Tract 39.

15.57 Intersect the line bet. secs. 28 and 29 of the resurvey, North, 19.04 chs. dist. from the closing cor. of secs. 29 and 32.

METES AND BOUNDS SURVEY OF PRIVATE CLAIMS, T. 10 N., R. 5 E.

Chains

19.95 Point for the SW. 1/16 sec. cor. sec. 29 of the Martineau survey.

Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground and mound of stone, for angle point No. 6, Tract 39, with brass cap marked.

T10N R5E

AP6 TR39

S28

1938

Thence:

S. 0° 57' W., on the N. and S. center line of the SW $\frac{1}{4}$ sec. 29, of the Martineau survey, and along W. bdy. of Tract 39.

20.06 Point for the W. 1/16 sec. cor. secs. 29 and 32 of the Martineau survey.

Set an iron post, 3 ft. long, 1 in. diam., 30 ins. in the ground and mound of stone, for angle point No. 7, Tract 39, with brass cap marked,

T10N R5E

S28 | AP7
TR39

TR41

1938

Thence:

S. 88°55' E., along the S. bdy. of Tract 39 and the N. bdy. of Tract 41.

20.04 Proportionate distance; point for the $\frac{1}{4}$ sec. cor. of secs. 29 and 32, of the Martineau survey. No trace of cor. found.

40.08 Proportionate distance; point for the E. 1/16 sec. cor. of secs. 29 and 32 of the Martineau survey.

Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground and mound of stone, for angle point No. 8, Tract 39 and angle point No. 3, Tract 40, with brass cap marked

T10N R5E

AP8 | AP3
TR39 | TR40

TR41

1938

Thence:

N. 1°12' E., on N. and S. center line of the SE $\frac{1}{4}$ sec. 29 of the Martineau survey, along E. bdy. of Tract 39 and W. bdy. of Tract 40.

20.01 Point for the SE. 1/16 sec. cor. sec. 29 of the Martineau survey.

Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, and in a mound of stone, for angle point No. 9, Tract 39, with brass cap marked.

METES AND BOUNDS SURVEY OF PRIVATE CLAIMS, T. 10 N., R. 5 E.

Chains

T10N	R5E
S28	} TR40
AP9	
TR39	

1938

Thence:

N. 88° 49' W., on the E. and W. center line of the SE $\frac{1}{4}$ sec. 29, and along the N. bdy. of Tract 39.

20.10 Point for the center S. 1/16 sec. cor. of sec. 29 of the Martineau survey.

Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground and mound of stone, for angle point No. 10, Tract 39, with brass cap marked,

T10N	R5E
AP10	S28

TR39

1938

From this cor., Big Crawford Spring, bears N. 8° 45' W., 5.00 chs. dist. Spring flows about 10 second feet of water.

Thence:

N. 0° 50' E., on the N. and S. center line of sec. 29 of the Martineau survey, and along the E. bdy. of Tract 39.

20.03 To angle point No. 1, Tract 39, and place of beginning.

TRACT 40.

E $\frac{1}{4}$ SE $\frac{1}{4}$ sec. 29, and SW $\frac{1}{4}$ SW $\frac{1}{4}$ sec. 28, of the Martineau survey of T. 10 N., R. 5 E., State selection list 45, approved. Present claimant, the Randolph Land and Live Stock Company, Communication was made with Arch McKinnon, Secretary and Treasurer of said company and I was informed that this tract was located with reference to the corners of the Martineau survey of sec. 29. No improvements were found on this tract and its boundaries were not monumented. It consists of a rolling mountainous country and is suitable only for grazing purposes. The W. portion of the tract was surveyed to conform to the subdivisional lines of sec. 29, and the E. portion was surveyed at parallel offsets from the E. bdy. of sec. 29, as no Martineau corners were found to the E. of this sec.

The tract is in conflict with appropriated lands in secs. 27 and 28 as follows: SW $\frac{1}{4}$ SW $\frac{1}{4}$ sec. 27 to the extent of 9.75 acres; SE $\frac{1}{4}$ SE $\frac{1}{4}$ sec. 28 to the extent of 36.15 acres.

The Martineau $\frac{1}{4}$ sec. cor. of secs. 28 and 29 is a white sandstone, 18 x 10 x 4 ins., firmly set in the ground and mound of stone, marked $\frac{1}{4}$ on W. face. Cor. has no accessories.

At the cor. point:

Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground and a large mound of stone, with the original cor. monument deposited at the base of the post, for angle point No. 1, Tract 40, with brass cap marked.

METES AND BOUNDS SURVEY OF PRIVATE CLAIMS, T. 10 N., R. 5 E.

Chains

T10N R5E
S28AP1
TR40

1938

Thence, from the above cor.

N. $88^{\circ}42'$ W., on E. and W. center line of sec. 29 of the Martineau survey, and along the N. bdy. of Tract 40.

20.24 Point for the center E. 1/16 sec. cor. sec. 29.

Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground and mound of stone, for angle point No. 2, Tract 40, with brass cap marked

T10N R5E
S28AP2
TR40

1938

Thence:

S. $1^{\circ}12'$ W., on the N. and S. center line 3rd sec. 29, and along the W. bdy. of Tract 40.

20.01 To angle point No. 9, Tract 39.

Thence bet. Tracts 39 and 40.

40.02 To angle point No. 3, Tract 40, identical with angle point No. 2, Tract 39.

Thence:

S. $89^{\circ}55'$ E., along the S. bdy. of Tract 40, the N. bdy. of Tract 41, and bet. secs. 29 and 32 of the Martineau survey.

20.04 To angle point No. 1, Tract 41, and established point for the cor. of secs. 29, 31, 32, and 33, of the Martineau survey.

Continue on same line along the S. bdy. of Tract 40.

34.80 Intersect the line bet. secs. 27 and 28 of the resurvey, N. $1^{\circ}25'$ E., 1.91 chs. dist. from the cor. of secs. 27, 29, 33, and 34.

40.04 Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground and mound of stone, for angle point No. 4, Tract 40, with brass cap marked

T10N R5E
AP4
TR40

S27

1938

Thence:


N. $1^{\circ}23'$ E., along the E. bdy. of Tract 40, parallel to the E. bdy. of sec. 29 of the Martineau survey.

20.01 Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in

METES AND BOUNDS SURVEY OF PRIVATE CLAIMS, T. 10 N., R. 5

Chains

the ground and mound of stone, for angle point No. 5, Tract 40, with brass cap marked



1938


Thence:

N. 88°55' W., along the N. bdy. of Tract 40.

5.22 Intersect the line bet. secs. 27 and 28 of the resurvey, S. 1°25' W., 19.19 chs. dist. from the 1/4 sec. cor. of secs. 27 and 28.

20.00 Point for the S. 1/16 sec. cor. of secs. 28 and 29 of the Martineau survey.

Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground and mound of stone, for angle point No. 6, Tract 40, with brass cap marked



1938

Thence:

N. 1°23' E., along the E. bdy. of sec. 29 of the Martineau survey and along the E. bdy. of Tract 40.

20.01 To angle point No. 1, Tract 40, identical with the 1/4 sec. cor. of secs. 28 and 29 of the Martineau survey, and place of beginning.

TRACT 41.

All of sec. 32 of the Martineau survey of T. 10 N., R. 5 E School section.

This tract was surveyed to conform to the boundaries of sec. 32 of the Martineau survey of T. 10 N., R. 5 E. With the exception of the cor. of secs. 31 and 32 on the S. bdy of the township, the 1/4 sec. cor. of secs. 31 and 32, and the cor. of secs. 29, 30, 31, and 32, all of the cors. of the Martineau survey of sec. 32 are missing. The point for the NE. cor. of the sec. was established under control of the Martineau cor. of secs. 29, 30, 31, and 32, and the 1/4 sec. cor. of secs. 28 and 29. The SE. cbr. of the sec. was established on the township boundary, record distance, 90.00 chs. to the E. of the Martineau cor. of secs. 31 and 32. The E. bdy. of the sec. was established by a line connecting the NE. and SE. cors. of the sec. The sec. is owned by the Randolph Land And Livestock Company and consists of a rolling mountainous country which is suitable only for grazing purposes. At the time of the survey, the only improvements on the sec. were a three room log cabin and about one half mile of fencing, all of which were located in the E. portion of the sec. Robert Kitty was living in the cabin and was working two small prospects located near the E. bdy. of the sec. The tract is in conflict with appropriated SE 1/4 sec 28 to the extent of 0.82 acres.

METES AND BOUNDS SURVEY OF PRIVATE CLAIMS, T. 10 N., R. 5 E.

Chains

At a point, S. 1°23' W., 40.01 chs. from the Martineau $\frac{1}{4}$ sec. cor. of secs. 28 and 29, and S. 88°55' E., 80.15 chs. from the Martineau cor. of secs. 29, 30, 31, and 32.

Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground and mound of stone, for angle point No. 1, Tract 41, with brass cap marked

T10N R5E
TR40

AP1
TR41 | 328

1938

Thence, from the above cor.

N. 88°55' W., on line bet. secs. 29 and 32 of the Martineau survey, and along the S. bdy. of Tract 40, and the N. bdy. of Tract 41.

20.04 To angle point No. 3, Tract 40, identical with angle point No. 8, Tract 39.

40.08 Find no trace of the Martineau $\frac{1}{4}$ sec. cor. of secs. 29 and 32.

60.12 To angle point No. 7, Tract 39.

64.02 Intersect the E. bdy. of sec. 32 of the resurvey, North, 2.12 chs. dist. from the cor. of secs. 29 and 33.

80.15 The Martineau cor. of secs. 29, 30, 31, and 32, a white sandstone, 20 x 12 x 12 ins., firmly set in the ground and mound of stone, marked 1 groove on S. face and 5 grooves on E. face. Cor. has no accessories.

At the cor. point:

Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground, and in a large mound of stone, with the original cor. monument deposited at the base of the post, for angle point No. 2, Tract 41, with brass cap marked

T10N R5E

332

AP2
TR41

1938

Thence:

S. 1°11' W., along the W. bdy. of Tract 41, and the line bet. secs. 31 and 32 of the Martineau survey.

40.00 The Martineau $\frac{1}{4}$ sec. cor. of secs. 31 and 32, a white sandstone, 18 x 12 x 12 ins., firmly set in the ground and mound of stone, marked 1 on W. face. Cor. has no accessories.

At the cor. point:

Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground and mound of stone, with the original cor. monument deposited at the base of the post, for angle point No. 3, Tract 41, with brass cap marked

METES AND BOUNDS SURVEY OF PRIVATE CLAIMS, T. 10 N., R. 5 E.

Chains

T10N | R5E
 S32 | AP3
 TR41
 1938

Thence:

S. 2°00' W., along the W. bdy. of Tract 41.

40.39

The cor. of secs. 31 and 32, T. 10 N., R. 5 E. of the Martineau survey, identical with angle point No. 4, Tract 42, T. 9 N., R. 5 E., an iron post, 2 ins. diam., set, marked and witnessed, as described in the official record of the resurvey of T. 9 N., R. 5 E., Group 33, Utah.

As this cor. becomes angle point No. 4, Tract 41, and sec. 31, becomes sec. 32, T. 10 N., R. 5 E., I change the mark on the brass cap of the cor. monument to read as follows.

T10N
 R5E
 S32 | AP4
 TR41
 AP4
 TR42
 T9N
 1924

Thence:

N. 89°48' E., along the S. bdy. of Tract 41, and along the S. bdy. of the township.

17.95

To angle point No. 5, Tract 41, and the SE. cor. of sec. 32 of the resurvey, identical with angle point No. 3, Tract 42, and the closing cor. of sec. 5, T. 9 N., R. 5 E.

Thence:

S. 0°16' W., along the W. bdy. of Tract 41.

1.26

The SW. cor. of sec. 33 of the resurvey and angle point No. 6, Tract 41, T. 10 N., R. 5 E., identical with angle point No. 2, Tract 42, T. 9 N., R. 5 E.

Thence:

N. 89°57' E., along the S. bdy. of Tract 41, and along the S. bdy. of the township.

2.05

To angle point No. 1, Tract 42, identical with angle point No. 2, Tract 41, T. 9 N., R. 5 E., an iron post, 1 in. diam., set, marked and witnessed, as described in the official record of the resurvey of T. 9 N., R. 5 E., Group 33, Utah.

I add the marks TR41 to those on the N. half of the brass cap of the cor. monument.

18.79

The witness cor. to the 1/4 sec. cor. sec. 5, T. 9 N., R. 5 E. an iron post, 1 in. diam., set, marked and witnessed, as described in the official record of the resurvey of T. 9 N., R. 5 E., Group 33, Utah.

I mark the N. half of the brass cap of this cor. monument, TR41.

METES AND BOUNDS SURVEY OF PRIVATE CLAIMS, T. 10 N., R. 5 E.

Chains

- 19.79 The true point for the $\frac{1}{4}$ sec. cor. sec. 5, T. 9 N., R. 5 E.
- 21.95 The witness cor. to angle point No. 1, Tract 41, T. 9 N., R. 5 E., an iron post, 1 in. diam., set, marked and witnessed as described in the official record of the resurvey of T. 9 N., R. 5 E., Group 33, Utah.
- I add the marks TR41 to those on the N. half of the brass cap of the cor. monument.
- 22.05 True point for angle point No. 1, Tract 41, T. 9 N., R. 5 E.
- 39.35 The $\frac{1}{4}$ sec. cor. sec. 33, T. 10 N., R. 5 E., identical with angle point No. 2, Tract 40, T. 9 N., R. 5 E., an iron post, 1 in. diam., set, marked and witnessed, as described in the official record of the resurvey of T. 9 N., R. 5 E., Group 33, Utah.
- I add the marks TR41 to those on the N. half of the brass cap of the cor. monument.
- 59.025 To angle point No. 1, Tract 40, T. 9 N., R. 5 E., an iron post, 1 in. diam., set, marked and witnessed, as described in the official record of the resurvey of T. 9 N., R. 5 E., Group 33, Utah.
- I add the marks TR41 to those on the N. half of the brass cap of the cor. monument.
- 59.72 The closing cor. of secs. 4 and 5, T. 9 N., R. 5 E., an iron post, 2 ins. diam., set, marked and witnessed as described in the official record of the resurvey of T. 9 N., R. 5 E., Group 33, Utah.
- I add the marks TR41 to those on the N. half of the brass cap of the cor. monument.
- 62.05 Point which is an easting of 80.00 chs. from angle point No. 4, Tract 41, T. 10 N., R. 5 E.
- Set an iron post, 3 ft. long, 1 in. in diam., 30 ins. in the ground and mound of stone, for angle point No. 7, Tract 41, with brass cap marked
- | | |
|------|-----|
| T10N | R5E |
| AP7 | |
| TR41 | S33 |
- 1938
- Thence:
- N. $1^{\circ} 34'$ E., along the E. bdy. of Tract 41.
- 18.16 From this point, a three room log cabin, belonging to Robert Kitty, bears N. $54^{\circ} 19'$ W., 20.10 chs. dist.
- A prospect tunnel about 30 ft. in length, belonging to Robert Kitty, bears N. $51^{\circ} 20'$ W., 17.00 chs. dist.
- A shallow prospect hole owned by Robert Kitty, bears N. $12^{\circ} 10'$ W., 15.50 chs. dist.
- 40.00 Find no trace of the Martineau $\frac{1}{4}$ sec. cor. of secs. 32 and 33.
- 78.39 Intersect the line bet. secs. 28 and 33 of the resurvey, N. $88^{\circ} 32'$ W., 14.76 chs. dist. from the cor. of secs. 27, 28, 33, and 34.

METES AND BOUNDS SURVEY OF PRIVATE CLAIMS, T. 10 N., R. 5 E.

Chains

80.20 To angle point No. 1, Tract 41, and place of beginning.

TRACT 42

The SE $\frac{1}{4}$ SW $\frac{1}{4}$ sec. 15, T. 10 N., R. 5 E., is an approved State selection, list 45. It is owned by the Randolph Land and Livestock Company, and was located by said company from the plat of the Martineau survey of T. 10 N., R. 5 E. All the land embraced in this claim is unimproved and consists of a rolling mountainous country which is suitable only for grazing purposes. Its boundaries are not monumented and the nearest Martineau corner to the claim is the cor. of secs. 15, 16, 21, and 22, identical with angle point No. 4, Tract 37. Communication was made with Arch McKinnon, Secretary and Treasurer of said company and I was informed that a location of the claim conforming to the lines of the resurvey would be satisfactory. The claim therefore is conformed to the SW $\frac{1}{4}$ SW $\frac{1}{4}$ sec. 14 and designated as Tract 42 of the dependent resurvey, which falls in approximately the same location as it did under its original description.

CONFIRMATION OF PRIVATE CLAIMS IN T. 10 N., R. 5 E., TO LINES OF THE RESURVEY UNDER NEW DESCRIPTIONS.

CONFIRMATION S $\frac{1}{2}$ SW $\frac{1}{4}$, SW $\frac{1}{4}$ SE $\frac{1}{4}$ Sec. 4.

The S $\frac{1}{2}$ SW $\frac{1}{4}$, SW $\frac{1}{4}$ SE $\frac{1}{4}$ sec. 4, T. 10 N., R. 5 E. is an approved State selection, list 48, and is owned by the Randolph Land and Livestock Company. It was located by said company from the Martineau plat of survey of T. 10 N. R. 5 E.

All the land embraced in this claim is unimproved and is a high mountainous country, suitable only for grazing purposes. Its boundaries are not monumented and the nearest identified Martineau cor. is the cor. of secs. 8, 9, 16, and 17, identical with angle point No. 2, Tract 37. Communication was made with Arch McKinnon, Secretary and Treasurer of said Company, and I was informed that a relocation of the claim under control of the lines of the resurvey would be satisfactory. The claim therefore was made to conform to SE $\frac{1}{4}$ SE $\frac{1}{4}$ sec. 4, SW $\frac{1}{4}$ SW $\frac{1}{4}$, and the SE $\frac{1}{4}$ SW $\frac{1}{4}$ sec. 3, of the independent resurvey, under a new description, which falls approximately in the same location as it did under the original description.

CONFIRMATION SE $\frac{1}{4}$ SW $\frac{1}{4}$ Sec. 8.

The SE $\frac{1}{4}$ SW $\frac{1}{4}$ sec. 8, T. 10 N., R. 5 E., is an approved State selection, list 52, and is owned by the Randolph Land and Livestock Company, and was located by said company from the plat of the Martineau survey of T. 10 N., R. 5 E. All the lands embraced within this claim are unimproved and in a rolling mountainous country suitable only for grazing purposes. Its boundaries are not monumented and the nearest corner of the Martineau survey to the claim is the cor. of secs. 8, 9, 16, and 17, identical with angle point No. 2, Tract 37. Communication was made with Arch McKinnon, Secretary and Treasurer of said company, and I was informed that a relocation of the claim under control of the lines of the resurvey would be satisfactory. The claim therefore was made to conform to the SW $\frac{1}{4}$ SW $\frac{1}{4}$ sec. 9, of the independent resurvey under a new description, which falls approximately in the same location as it did under its original description.

CONFORMATION OF PRIVATE CLAIMS IN T. 10 N., R. 5 E., TO
LINES OF THE RESURVEY UNDER NEW DESCRIPTIONS.

Chains

CONFORMATION, SE $\frac{1}{4}$ SE $\frac{1}{4}$ Sec. 17.

The SE $\frac{1}{4}$ SE $\frac{1}{4}$ sec. 17, T. 10 N.; R. 5 E., is an approved State selection, list 10. It is owned by the Randolph Land And Livestock Company, and was located by said company from the plat of the Martineau survey of T. 10 N., R. 5 E. All the land embraced in this claim is unimproved, and consists of a high mountainous country which is suitable only for grazing purposes. Its boundaries are not monumented and the nearest Martineau cor. to the claim is the Martineau cor. of secs. 16, 17, 20, and 21, identical with angle point No. 3, Tract 37. Communication was made with Arch McKinnon, Secretary and Treasurer of said company, and I was informed that a relocation of the claim under control of the lines of the resurvey, would be satisfactory. The claim therefore was made to conform to the SW $\frac{1}{4}$ SE $\frac{1}{4}$ sec. 16, of the lines of the independent resurvey under a new description, which falls approximately in the same location as it did under its original description.

CONFORMATION SE $\frac{1}{4}$ NE $\frac{1}{4}$ Sec. 17.

The SE $\frac{1}{4}$ NE $\frac{1}{4}$ sec. 17, T. 10 N., R. 5 E., is an approved State selection, list 45. It is owned by the Randolph Land And Livestock Company, and was located by said company from the Martineau plat of the survey of T. 10 N., R. 5 E. All the land embraced in this claim is unimproved and consists of a high mountainous country which is suitable only for grazing purposes. Its boundaries are not monumented and the nearest Martineau cor. to the claim, is the cor. of secs. 8, 9, 16, and 17, identical with angle point No. 2, Tract 37. Communication was made with Arch McKinnon, Secretary and Treasurer of said company, and I was informed that a relocation of the claim under control of the lines of the resurvey would be satisfactory. The claim therefore was made to conform to the SW $\frac{1}{4}$ NE $\frac{1}{4}$ sec. 16, of the lines of the independent resurvey, under a new description, which falls approximately in the same location as it did under its original description.

CONFORMATION NE $\frac{1}{4}$ SW $\frac{1}{4}$ Sec. 17.

The NE $\frac{1}{4}$ SW $\frac{1}{4}$ sec. 17, T. 10 N., R. 5 E., is an approved State selection, list 52, and is owned by the Randolph Land And Livestock Company. It was located by said company from the Martineau plat of survey of T. 10 N., R. 5 E. All the land embraced in this claim is unimproved and it consists of a high mountainous country which is suitable only for grazing purposes. Its boundaries are not monumented and the nearest Martineau cor. to the claim, is the cor. of secs. 16, 17, 20, and 21, identical with angle point No. 3, Tract 37. Communication was made with Arch McKinnon, Secretary and Treasurer of said company, and I was informed that a relocation of the claim under control of the lines of the resurvey, would be satisfactory. The claim therefore was made to conform to the NW $\frac{1}{4}$ SW $\frac{1}{4}$ of sec. 16 of the lines of the independent resurvey, under a new description which falls approximately in the same location as it did under its original description.

CONFORMATION SW $\frac{1}{4}$ NW $\frac{1}{4}$ Sec 17 AND SE $\frac{1}{4}$ NE $\frac{1}{4}$ Sec. 18.

The SW $\frac{1}{4}$ NW $\frac{1}{4}$ sec. 17 and the SE $\frac{1}{4}$ NE $\frac{1}{4}$ sec. 18, T. 10 N., R. 5 E., is an approved State selection, list 45, and is

CONFIRMATION OF PRIVATE CLAIMS IN T. 10 N., R. 5 E. TO THE LINES OF THE RESURVEY UNDER NEW DESCRIPTION.

Chains

owned by the Randolph Land And Livestock Company. It was located by said company from the plat of the Martineau survey of T. 10 N., R. 5 E. All the land embraced in this claim is unimproved and its boundaries are not monumented. The nearest Martineau cor. to the claim is the cor. of secs. 8, 9, 16, and 17, identical with angle point No. 2, Tract 37. The claim consists of a high mountainous country which is suitable only for grazing purposes. Communication was made with Arch McKinnon, Secretary and Treasurer of said company, and I was informed that a relocation of the claim under control of the lines of the resurvey, would be satisfactory. The claim therefore was made to conform to the $SE\frac{1}{4} NE\frac{1}{4}$ and the $SW\frac{1}{4} NE\frac{1}{4}$ sec. 17 of the lines of the independent resurvey, under a new description, which falls approximately in the same location as it did under its original description.

CONFIRMATION $NW\frac{1}{4} SE\frac{1}{4}$, $N\frac{1}{2} SW\frac{1}{4}$ Sec. 20.

The $NW\frac{1}{4} SE\frac{1}{4}$ and $N\frac{1}{2} SW\frac{1}{4}$ sec. 20, T. 10 N., R. 5 E., is an approved State selection, list 10, and is owned by the Randolph Land And Livestock Company. It was located by said company from the plat of the Martineau survey of T. 10 N., R. 5 E. All the land embraced in this claim, is unimproved and consists of a rolling mountainous country which is suitable only for grazing purposes. The boundaries of the claim are not monumented and the nearest Martineau cor. to the claim is the sec. cor. secs. 20 and 21. Communication was made with Arch McKinnon, Secretary and Treasurer of said company, and I was informed that a relocation of the claim under control of the lines of the resurvey, would be satisfactory. The claim therefore was made to conform to the $N\frac{1}{2} SW\frac{1}{4}$ sec. 21, and the $NE\frac{1}{4} SE\frac{1}{4}$ sec. 20, of the lines of the independent resurvey, under a new description, which falls approximately in the same location as it did under its original description.

CONFIRMATION $SE\frac{1}{4} SE\frac{1}{4}$ Sec. 19.

The $SE\frac{1}{4} SE\frac{1}{4}$ sec. 19, T. 10 N., R. 5 E., is an approved State selection, list 19. It is owned by the Randolph Land And Livestock Company, and was located by said company from the plat of the Martineau survey of T. 10 N., R. 5 E. All the land embraced in this claim is unimproved and consists of a high mountainous country which is suitable only for grazing purposes. The boundaries of the claim are not monumented and the nearest Martineau cor. to the claim is the sec. cor. secs. 29 and 30. Communication was made with Arch McKinnon, Secretary and Treasurer of said company and I was informed that a relocation of the claim under control of the lines of the resurvey, would be satisfactory. The claim therefore was made to conform to the $SW\frac{1}{4} SE\frac{1}{4}$ of sec. 20 of the lines of the independent resurvey, under a new description, which falls approximately in the same location as the claim did under its original description.

CONFIRMATION $SE\frac{1}{4} NE\frac{1}{4}$ Sec. 30.

The $SE\frac{1}{4} NE\frac{1}{4}$ sec. 30, T. 10 N., R. 5 E., is an approved State selection, list 10. It is owned by the Randolph Land And Live Stock Company, and was located by said company from the plat of the Martineau survey of T. 10 N., R. 5 E. All the land embraced in this claim consists of a rolling mountainous country which is suitable only for

CONFORMATION OF PRIVATE CLAIMS IN T. 10 N., R. 5 E. TO
THE LINES OF THE RESURVEY UNDER A NEW DESCRIPTION.

Chains

grazing purposes. The boundaries of the claim are not monumented and the nearest Martineau cor. to the claim is the $\frac{1}{4}$ sec. cor. of secs. 29 and 30. Communication was made with Arch McKinnon, Secretary and Treasurer of said company, and I was informed that a relocation of the claim under control of the lines of the resurvey would be satisfactory. The claim therefore was made to conform to the SW $\frac{1}{4}$ NE $\frac{1}{4}$ of sec. 29, of the lines of the independent resurvey, which falls approximately in the same location as the claim did under its original description.

DESIRED CONFORMATION SE $\frac{1}{4}$ SE $\frac{1}{4}$ Sec. 28 AND SW $\frac{1}{4}$ SW $\frac{1}{4}$ Sec. 27.

The SE $\frac{1}{4}$ SE $\frac{1}{4}$ sec. 28 and SW $\frac{1}{4}$ SW $\frac{1}{4}$ sec. 27, is an approved State selection, list 45. It is owned by the Randolph Land And Live Stock Company, and was located from the Martineau $\frac{1}{4}$ sec. cor. secs. 28 and 29, with reference to Tract 40, and not from the T.C. Bailey and J.G. Burrill survey of T. 10 N., R. 5 E. All of the land embraced in this claim is unimproved and consists of a rolling mountainous country, which is suitable only for grazing purposes. The boundaries of the claim are not monumented. Communication was made with Arch McKinnon, Secretary and Treasurer of said company, and I was informed that a relocation of the claim under control of the lines of the resurvey would be satisfactory. The claim therefore **could be amended** to the SW $\frac{1}{4}$ SE $\frac{1}{4}$ and the SE $\frac{1}{4}$ SE $\frac{1}{4}$ sec. 27, of the lines of the dependent resurvey, under a new description, which falls approximately in the same location as it would if controlled by the Martineau survey.

CONFORMATION N $\frac{1}{2}$ SE $\frac{1}{4}$, NE $\frac{1}{4}$ SW $\frac{1}{4}$ Sec. 31.

The N $\frac{1}{2}$ SE $\frac{1}{4}$, NE $\frac{1}{4}$ SW $\frac{1}{4}$ sec. 31, T. 10 N., R. 5 E., is an approved State selection, list 19, and is owned by the Randolph Land And Livestock Company. The claim was located by said company from the Martineau plat of survey of T. 10 N., R. 5 E. The nearest cor. to the claim is the Martineau $\frac{1}{4}$ sec. cor. secs. 31 and 32. The claim consists of a high mountainous country which is suitable only for grazing purposes. The boundaries of the claim are not monumented. Communication was made with Arch McKinnon, Secretary and Treasurer of said company, and I was informed that a relocation of the claim under control of the lines of the resurvey, would be satisfactory. The claim therefore was made to conform to the N $\frac{1}{2}$ SW $\frac{1}{4}$, NW $\frac{1}{4}$ SE $\frac{1}{4}$ sec. 32 of the lines of the independent resurvey, under a new description, which falls approximately in the same location as it did under its original description.

GENERAL DESCRIPTION OF T. 10 N., R. 5 E.

The land within the boundaries of T. 10 N., R. 5 E., Salt Lake Meridian, Utah, consists of a high mountainous country most of which is on the east drainage of the Wasatch Mountain Range, which is a high prominent range of mountains bearing in a northerly and southerly direction. The township is of a sandstone, volcanic, and limestone formation, with outcroppings of quartzite and granite. The elevation ranges from about 7000 feet above sea level along the east portion to about 9000 feet on the west portion. The main divide ridge of the Wasatch Mountain Range, located about one-half mile to the west of the township, bears in a northerly direction to a point on the west boundary of section 7; from this point, the

GENERAL DESCRIPTION OF, T. 10 N., R. 5 E.

divide bears easterly through the north half of section 7 and the NW $\frac{1}{4}$ section 8, and northerly through the W $\frac{1}{2}$ of section 5. From this divide ridge, the canyons, draws, hollows, and ravines head, and drain in an easterly direction through the township.

The soil throughout most portions of the township, consists of shallow clay and gravel, with a rocky surface, and may be classified as 3rd and 4th rates. In the bottom lands of the wide draws, canyons, and hollows, the soil is deeper than that on the slopes of the spurs and ridges, and contains more vegetable matter.

The west and north portions of the township, are covered with a dense growth of aspen, balsam, spruce, fir, and pine timber, while the remaining portion contains only scattered clumps of aspen. The spruce, pine, balsam, and fir timber is of a commercial value and is being made into building materials under the supervision of the Forest Service.

Throughout the township, a dense short undergrowth of sagebrush, mountain laurel, mahogany, service berry, broom weeds and grass is found, which affords good grazing for stock. Due to the high elevation, the township is only grazed during the summer months of the year, and most of it is now being grazed under the supervision of the Forest Service and the Division of Grazing.

The township in general, is suitable only for a grazing range for stock, and was being used for this purpose by stockmen, most of whom live at Randolph, Utah.

The township has a good supply of water, consisting of numerous small springs, spring branches, seeps, and the forks of Big Creek. The normal flow of the South Fork Big Creek, is about ten second feet, the head of which is formed by Big and Little Crawford Creeks. Little Crawford Creek heads at a small spring located in the SE $\frac{1}{4}$ SW $\frac{1}{4}$ sec. 33, and flows in a northeasterly direction to its junction with Big Crawford, in the SE $\frac{1}{4}$ SE $\frac{1}{4}$ sec. 28. Big Crawford Creek heads at Big Crawford Spring, located in the NE $\frac{1}{4}$ SW $\frac{1}{4}$ sec. 28, and flows in an easterly direction to its junction with Little Crawford Creek, both of which form the South Fork Big Creek, which flows easterly, leaving the township on the east boundary of sec. 25. The North Fork Big Creek, has a normal flow of about seven second feet of water, and heads at a large spring located in the W. portion of the NE $\frac{1}{4}$ sec. 16, and flows in an easterly direction, leaving the township on the east boundary of sec. 13. Intermittent small streams were found along the bottom of the Center Fork Big Creek, in secs. 24, 14, 15, and 16. Small springs of good water were also found in the NE $\frac{1}{4}$ SW $\frac{1}{4}$ sec. 1; SE $\frac{1}{4}$ SW $\frac{1}{4}$ sec. 10; NW $\frac{1}{4}$ NW $\frac{1}{4}$ sec. 24; SE $\frac{1}{4}$ SE $\frac{1}{4}$ sec. 16; NW $\frac{1}{4}$ NW $\frac{1}{4}$ sec. 20; SE $\frac{1}{4}$ SW $\frac{1}{4}$ sec. 23; NE $\frac{1}{4}$ SE $\frac{1}{4}$ sec. 26; SW $\frac{1}{4}$ NE $\frac{1}{4}$ sec. 28; NE $\frac{1}{4}$ SE $\frac{1}{4}$ sec. 32; NE $\frac{1}{4}$ SW $\frac{1}{4}$ sec. 33; NE $\frac{1}{4}$ SE $\frac{1}{4}$ sec. 33, and the NW $\frac{1}{4}$ SW $\frac{1}{4}$ sec. 34. A small stream flows easterly through sec. 36, which originates from several small springs along the bottom of a deep ravine in said sec.

The only improvements in the township are, a log cabin, a tunnel and prospect hole belong to Robert Kitty, located in the N $\frac{1}{2}$ SE $\frac{1}{4}$ sec. 33, or Tract 41, a one room log cabin belonging to John Edward Kennedy, located in the NE $\frac{1}{4}$ SE $\frac{1}{4}$ sec. 26, a one room log cabin belonging to Joseph F. Wilson, located in the NE $\frac{1}{4}$ NW $\frac{1}{4}$ sec. 24, and a two room log cabin belonging to Edwin T. Pope, located in the NW $\frac{1}{4}$ NW $\frac{1}{4}$ sec. 14. The only fencing found in the township, was about 1 mile of fence located in the NW $\frac{1}{4}$ sec. 14, about 1 mile located in the N $\frac{1}{2}$ sec. 24, about $1\frac{1}{2}$ miles located in sec. 26, and about $\frac{1}{2}$ mile located in sec. 33, or Tract 41. An improved Forest Service road bears easterly and westerly through the north portion of the township.

GENERAL DESCRIPTION OF T. 10 N., R. 5 E.

Chains

Unimproved roads are found throughout the township, which makes nearly all portions of it accessible to automobiles. The only person living on the township at the time of the resurvey, was Robert Kitty, who lives at the cabin located in sec. 33 or Tract 41.

No indications of coal, oil, oil shale, or mineral were found.

The magnetic declination at the cor. of Ts. 9 and 10 N., Rs. 5 and 6 E., was found to be $16^{\circ}45'$ E.

CADASTRAL ENGINEER
CERTIFICATE OF SURVEYOR

I, Elliot Bird, Cadastral Engineer, HEREBY CERTIFY upon honor that, pursuant of special instructions bearing date of the 28th day of July 1937 received from the district cadastral engineer for Utah, with assignm instructions dated June 25, 1938, I have surveyed ~~made a dependent resurvey of~~ the north, east, and west boundaries; dependent and independent resu of the subdivision, and metes and bounds surveys and conformation of private claims, T. 10 N., R. 5 E. of the Salt Lake Meridian, in the State of Utah, which represented in the foregoing field notes as having been executed by me and under my direction; and that s survey has been made in strict conformity with said instructions, the Manual of Instructions for the Sur of the Public Lands of the United States, and in the specific manner described in the foregoing field notes Salt Lake City, Utah. January 12, 1939

Elliot Bird
Cadastral Engineer

CERTIFICATE OF APPROVAL

OFFICE OF SUPERVISOR OF SURVEYS,

Denver, Colorado, May 23, 1945

The foregoing field notes of the ~~survey of~~ dependent resurvey of the north, east, west boundaries; dependent and independent resurvey of the subdivisio and metes and bounds surveys and conformation of private claims, T. 10 N., R. 5 E. executed by Elliot Bird, Cadastral Engineer under special instructions dated July 28, 1937, and assignmen instructions dated June 25, 1938, having been critically examined, and the necessary corrections made prior to their certification by the engineer, the said field notes, and the surve therein described, are hereby approved.

[Signature]
Supervisor of Surveys.

~~CERTIFICATE OF TRANSCRIPT~~

I ~~CERTIFY~~ that the foregoing transcript of the field notes of the above-described surveys in _____, is a true copy of the original field notes on file in the public survey office.

Supervisor of Surveys.

UNITED STATES
DEPARTMENT OF THE INTERIOR
GENERAL LAND OFFICE

FIELD NOTES

Public Land Survey Monuments Connected to U. S. Coast & Geodetic Survey

First Order Triangulation.

Of the Meridian,

In the State of Utah

EXECUTED BY

Everett H. Kimmell, U. S. Surveyor.

1931

Under special instructions dated, 19....., which provided
for the surveys included under Group No., bearing the approval of the
Commissioner of the General Land Office under date of
and assignment instructions dated, 19.....

Survey commenced, 19.....

Survey completed, 19.....

INDEX DIAGRAM.

Township _____, Range _____

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

UNITED STATES
DEPARTMENT OF THE INTERIOR
GENERAL LAND OFFICE
PUBLIC SURVEY OFFICE

390

Santa Fe, New Mexico,
May 3, 1940.


Mr. G. D. D. Kirkpatrick,
District Cadastral Engineer,
Public Survey Office,
Salt Lake City, Utah.

Dear Mr. Kirkpatrick:

I am enclosing herewith large and small forms, which constitute the final and complete record of public land survey monuments re-monumented and connected to the first order triangulation of the Coast and Geodetic Survey in the state of Utah.

This is the complete record of all such work performed by E. H. Kimmell in Utah in 1931.

Very truly yours,



Guy P. Harrington
District Cadastral Engineer.

EHK/bn
Enclosures

cc - Supervisor of Surveys

REMARKS relative to above values.

1927 - N. A. Datum.

GEOGRAPHIC POSITION OF PUBLIC LAND SURVEY MONUMENT
 (Triangulation Station UCOLWY)
 G.L.O. No. 1, Utah.

(No. 1 Colorado & No. 28 Wyoming)

Tp. Rg. Mer.
 State Utah - Colo. - Wyo. County Daggett - Moffat - Sweetwater.

Location and description of public land survey monument:

Original monument:

A boulder marked WYO on the north, COLO on the southeast and UTAH on the southwest, surrounded by a large mound of stone at the top of which was another similarly marked boulder.

New monument:

A regulation U.S. General Land Office brass tablet, set in concrete, 6 ins. above ground, marked:

UCOLWY
 WYO
 ————▲—————
 UTAH | COLO
 1931

Set the original stones alongside the new monument.

Latitude: 41° 00' 02.616"

Longitude: 109° 02' 57.633"

Elevation:

Remarks relative to above values:

1927 - N. A. Datum.

Directions for finding the public land survey monument:

To reach from Rock Springs, Wyo., go south on O Street five blocks from the R.R. to Pine Street; then E. one block; S. block; turn left and follow main road E. and SE. to mine trestle over road. Beginning distance at trestle; continue SE; at 0.3 mi take left fork; at 3.4 continue straight ahead; at 10.3 take left fork; at 15.3 take right fork and follow main traveled; graded road SE; at 40.7 take right fork toward Red Creek; at 43.7 take left at 45.3 take right fork toward Frank Meyers place; at 46.2 take fork; at 48.8 cabin on left side of road, turn right, up hill; at 50.8 take right fork; at 50.9 (Pete Robinson place) pass between cabins, cross wash, and follow old road SW. up hill; at 52.4 leave road, drive NNW. 0.2 mile to station, a little N. of top of ridge

Description of reference (or auxiliary) public land survey monuments:

No. 1

U.S. Coast and Geodetic Survey brass tablet, cemented in granite outcrop, 4x2x3 ft. above ground.

Bears: N. 18° 25' 48.2" E.,

Distance: 48.969 meters, 160.66 ft., 2.4342 chs.

No. 2

U.S. Coast and Geodetic Survey brass tablet, set in concrete

Bears: S. 30° 17' 19.1" E.,

Distance: 11.268 meters, 36.97 ft., 0.5601 chs.

Name of cadastral engineer who reconstructed the public land survey monument, and of engineer who cooperated in making the geodetic connection, and remarks relative to when the work was performed:

Everett H. Kimmell, U. S. Surveyor.

Work performed in August and September, 1931.

LOCATION AND DESCRIPTION OF COMPANION CONTROL MONUMENT:

Station: Brown.

Publication:

Pp:

Monument: A U. S. G. S. disk station mark set in a boulder.

Latitude: 41° 06' 20.453"

Longitude: 109° 14' 57.081"

Elevation:

Remarks relative to above values:

1927 - N. A. Datum.

Directions for finding:

Station is in sec. 16, T. 13 N., R. 105 W., about 33 miles airline south of Rocksprings, about 4 miles southwest of the Maxon Ranch, owned by W. H. Gottche, on a point bare of timber on what is locally known as Little Mountain, on the Divide between Red Creek and Front Creek, tributary to Sage Creek; on the second point of prominence, counting from the east end of the mountain.

Description of reference (or auxiliary) control monuments:

No. 1

A U. S. C. & G. S. disk reference mark set in cement in a small outcropping boulder.

Northwest

Bears:

Slope Distance: 113.97 meters, ft., chs.

No. 2

A U. S. C. & G. S. disk reference mark set in cement on top of a small sandstone slab.

Southeast

Bears:

Slope Distance: 10.59 meters, ft., chs.

CONNECTION FROM PUBLIC LAND SURVEY MONUMENT TO:

Companion Control Station: Brown. (USGS)

Forward azimuth:	124° 48' 57.9"	-	N. 55° 11' 02.1" W.	(Bearing)
Back azimuth:	304° 41' 05.4"	-	S. 55° 18' 54.6" E.	"
Length of line: log Meters:	4.310 654	-	20448.2	Meters
" Feet:		-	67078	Feet
" Chains:		-	1016.47	Chains
" Miles:		-	12.7059	Miles

Second Control Station: Quaking Asp. (USGS)

Latitude:	41° 26' 06.392"	Longitude:	109° 07' 00.250"	
Forward azimuth:	173° 20' 24.8"	-	N. 6° 39' 35.2" W.	(Bearing)
Back azimuth:	353° 17' 44.9"	-	S. 6° 42' 15.1" E.	"
Length of line: log Meters:	4.686 376	-	48570.9	Meters
" Feet:		-	159353	Feet
" Chains:		-	2414.44	Chains
" Miles:		-	30.1805	Miles

Third Control Station:

Latitude:		Longitude:	
Forward azimuth:		-	(Bearing)
Back azimuth:		-	"
Length of line: log Meters:		-	Meters
" Feet:		-	Feet
" Chains:		-	Chains
" Miles:		-	Miles

Remarks relative to above values:

1927 - N. A. Datum.

CONVERSION FACTORS:

1 Meter - 3.280 833 Feet
log - 0.515 9842

1 Meter - 0.000 62137 Miles
log - 6.793 3503

1 Meter - 0.049 7096 Chains
log - 8.696 4403

1 Chain - 66 Feet
log - 1.819 5439

GEOGRAPHIC POSITION OF PUBLIC LAND SURVEY MONUMENT

G.L.O. No. 2, Utah.

Tp. 1 N ., Rg. 2 W ., Uintah Principal Mer.
 State Utah County Duchesne

Location and description of public land survey monument:

Original monument:

A properly marked granite stone, 14 x 11 x 8 ins., witnessed by two original cedar bearing trees.

The Standard quarter - section corner of sec. 31, T. 1 N., R. 2 W., Uintah Prin. Meridian; on the Uintah Base Line.

New monument:

A regulation U. S. General Land Office brass tablet, set in a concrete post, 14 ins. square at top, 20 ins. square at base, 34 ins. long, 30 ins. in the ground on bedrock, marked:

SC
 T1NR2W
 1/4 S31

1931

Set the original stone alongside the new monument.

Latitude: 40° 25' 59.018"

Longitude: 110° 09' 11.198"

Elevation:

Remarks relative to above values:

1927 - N. A. Datum.

Directions for finding the public land survey monument:

To reach from Vernal, Utah, go west from the Conoco Service Station, at the west side of town; at 1.0 miles turn north; at 1.5 miles turn west and follow main traveled road west and southwest; at 17.2 miles pass through small town of Lapoint, continue west; at 23.5 miles turn north and follow main traveled road; at 25.9 miles turn left and go straight west for 5.5 miles to Neola; then beginning new distance, continue west; at 1.4 miles turn south; at 2.0 miles turn west; at 5.2 turn south; at 5.75 turn right and follow road west and northwest to 9.2 miles and top of mesa; at 9.25 take right right hand fork and follow wood road north to 9.65 miles. From this point the station is about 160 yds. east, about 12 yds. west of the east edge of mesa.

Description of reference (or auxiliary) public land survey monuments:

No. 1

A regulation U. S. General Land Office brass tablet, set in a concrete post, 12 ins. square at top, 20 ins. square at base, 28 ins. long, 24 ins. in the ground, on bedrock, marked "REFERENCE No. 1, 1931" and arrow pointing toward the station.

Bears: N. 42° 37' 05.9" E.,

Distance: 19.196 meters, 62.98 ft., 0.9542 chs.

No. 2

A regulation brass tablet, set in concrete post, 12 ins. square at top, 18 ins. square at base, 34 ins. long, 30 ins. in the ground, marked "REFERENCE No. 2, 1931" and arrow pointing toward the station.

Bears: N. 42° 12' 09.1" W.,

Distance: 23.570 meters, 77.33 ft., 1.1717 chs.

SW. Cor. of High School Bldg. in Roosevelt bears S. 42° 42' 01.6" E.

Name of cadastral engineer who reconstructed the public land survey monument, and of engineer who cooperated in making the geodetic connection, and remarks relative to when the work was performed:

Everett H. Kimmell, U. S. Surveyor.

Work performed in September, 1931.

Carl I. Aslakson, U. S. C. & G. S. Party Chief.

LOCATION AND DESCRIPTION OF COMPANION CONTROL MONUMENT:

Station: Cone.

Publication:

Pp:

Monument: A C. & G. S. disk station mark set in concrete.

Latitude: 40° 06' 04.831"

Longitude: 109° 50' 12.679"

Elevation:

Remarks relative to above values:

1927 - N. A. Datum.

Directions for finding:

The station is about 7 miles west by north of Ouray; 9 miles south by west of Randlett, on a cone shaped butte at the SE. end of the Leland Bench, in the SW. corner of sec. 30, T. 4 S., R. 1 E.

Description of reference (or auxiliary) control monuments:

No. 1

A C. & G. S. disk reference mark set in cement on top of a 4 in. galvanized iron pipe, on the highest point of first knoll west of station.

Bears: N. 73° 31' 15.2" W., approx. 1/4 mile dist.

Distance: meters, ft., chs.

No. 2

A C. & G. S. disk reference mark on top of a 4 in. galvanized iron pipe.

Bears: N. 27° 53' 15.4" W.,

Slope Distance: 5.08 meters, 16.7 ft., 0.253 chs.

CONNECTION FROM PUBLIC LAND SURVEY MONUMENT TO:

Companion Control Station: Cone.

Forward azimuth:	323° 45' 18.0"	-	S. 36° 14' 42.0" E.	(Bearing)
Back azimuth:	143° 57' 33.9"	-	N. 36° 02' 26.1" W.	"
Length of line: log Meters:	4.659 071	-	45611.1	Meters
" Feet:		-	149642	Feet
" Chains:		-	2267.31	Chains
" Miles:		-	28.3414	Miles

Second Control Station: Blue.

Latitude:	40° 22' 29.649"	Longitude:	109° 03' 53.359"	
Forward azimuth:	273° 38' 44.7"	-	S. 86° 21' 15.3" E.	(Bearing)
Back azimuth:	94° 21' 04.2"	-	N. 85° 38' 55.8" W.	"
Length of line: log Meters:	4.966 660	-	92610.4	Meters
" Feet:		-	303839	Feet
" Chains:		-	4603.63	Chains
" Miles:		-	57.5453	Miles

Third Control Station:

Latitude:		Longitude:	
Forward azimuth:		-	(Bearing)
Back azimuth:		-	"
Length of line: log Meters:		-	Meters
" Feet:		-	Feet
" Chains:		-	Chains
" Miles:		-	Miles

Remarks relative to above values:

1927 - N. A. Datum.

CONVERSION FACTORS:

1 Meter = 3.280 833 Feet	1 Meter = 0.049 7096 Chains
log = 0.515 9842	log = 8.696 4403
1 Meter = 0.000 62137 Miles	1 Chain = 66 Feet
log = 6.793 3503	log = 1.819 5439

GEOGRAPHIC POSITION OF PUBLIC LAND SURVEY MONUMENT

G.L.O. No. 3 Utah.

Tps. 5 S .. Rgs. 21 & 22 E.. Salt Lake Principal Mer.
 State Utah County Uintah.

Location and description of public land survey monument:

Original monument:

A properly marked granite stone, 6x4x4 ins., in a mound of stone.

New monument: The quarter section corner of secs. 19 and 24, Ts. 5 S., Rs. 21 and 22 E., Salt Lake Principal Meridian. A regulation U.S. General Land Office brass tablet, set in a concrete post, 14 ins. square at top, 20 ins. square at base, 38 ins. long, 34 ins. in the ground, marked:

T58
 R21E R22E
 1/4
 S24 | S19
 1931

Set the original stone alongside the new monument.

Latitude:

Longitude:

Elevation:

Remarks relative to above values:

Connection was not made, because of obstructed lines.

401
Directions for finding the public land survey monument:

From the monument in the center of the town of Vernal, Utah go south 1.5 miles; then east 1.5 miles; then south for 4.5 miles to the station, which is about 50 yds. west-southwest of a small bridge over an irrigation ditch.

Description of reference (or auxiliary) public land survey monuments:

- No. 1 A regulation U.S. General Land Office brass tablet, set in a concrete post, 12 ins. square at top, 18 ins. square at base, 34 ins. long, 30 ins. in the ground, marked "REFERENCE No. 1, 1931" and arrow pointing toward the station.

Easterly.

Bears:

Distance: meters, 75.06 ft., 1.1373 chs.

No. 2

- A regulation U.S. General Land Office brass tablet, set in a concrete post, 12 ins. square at top, 18 ins. square at base, 34 ins. long, 30 ins. in the ground, marked "REFERENCE No. 2, 1931" and arrow pointing toward the station.

Westerly.

Bears:

Distance: meters, 75.06 ft., 1.1373 chs.

The cor. is on line between the reference marks.

Name of cadastral engineer who reconstructed the public land survey monument, and of engineer who cooperated in making the geodetic connection, and remarks relative to when the work was performed:

Everett H. Kimmell, U. S. Surveyor,
Work performed in September, 1931.

FORM AND DESCRIPTION OF COMPANION CONTROL MONUMENT:

Blank

Page

CONNECTION FROM PUBLIC LAND SURVEY MONUMENT TO:

Companion Control Station:

Forward azimuth:	-	(Bearing)
Back azimuth:	-	"
Length of line: log Meters:	-	Meters
" Feet:	-	Feet
" Chains:	-	Chains
" Miles:	-	Miles

Second Control Station:

Latitude:	Longitude:	
Forward azimuth:	-	(Bearing)
Back azimuth:	-	"
Length of line: log Meters:	-	Meters
" Feet:	-	Feet
" Chains:	-	Chains
" Miles:	-	Miles

Third Control Station:

Latitude:	Longitude:	
Forward azimuth:	-	(Bearing)
Back azimuth:	-	"
Length of line: log Meters:	-	Meters
" Feet:	-	Feet
" Chains:	-	Chains
" Miles:	-	Miles

Remarks relative to above values:

CONVERSION FACTORS:

1 Meter = 3.280 833 Feet
log = 0.515 9842

1 Meter = 0.000 62137 Miles
log = 6.793 3503

1 Meter = 0.049 7096 Chains
log = 8.696 4403

1 Chain = 66 Feet
log = 1.819 5439

GEOGRAPHIC POSITION OF PUBLIC LAND SURVEY MONUMENT

G.L.O. No. 4, Utah.

(No. 4, Colorado)


Tp. .. Rg. .. Mer.

State Utah - Colorado County Uintah - Rio Blanco.

Location and description of public land survey monument:

Original monument: A limestone, 14x4x4 ins.,

New monument: Mile Post 224, Utah - Colorado Boundary. A regulation U.S. General Land Office brass tablet, set in concrete post, 14 ins. square at top, marked:

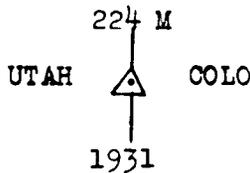

Set the original stone alongside the new monument.

Latitude: 40° 13' 25.071"

Longitude: 109° 03' 00.837"

Elevation:

Remarks relative to above values:

1927 - N. A. Datum.

Directions for finding the public land survey monument:

On the Colorado - Utah Boundary, about 4 miles south of the point where U. S. Highway No. 40 crosses the State Line at the Kay Ranch.

Description of reference (or auxiliary) public land survey monuments:

- No. 1 The quarter-section corner of sec. 12, T. 7 S., R. 25 E. Salt Lake Principal Meridian, on the Utah-Colo. Boundary. A regulation U.S. General Land Office brass tablet, set in a concrete post, 12 ins. square at top, 18 ins. square at base, 34 ins. long, 30 ins. in the ground, marked:

1/4
S12· COLO
UTAH
1931

The original monument, a properly marked regulation 1 in. iron post, was set inside the concrete post, under tablet. Bears: North (by compass)

Distance: meters, 90.9 ft., chs.

No. 2

A rock cairn, 4 ft. diameter, 8 ft. high,

Bears: S. 32° E. (by compass)

Distance: meters, 274.2 ft., chs.

Name of cadastral engineer who reconstructed the public land survey monument, and of engineer who cooperated in making the geodetic connection, and remarks relative to when the work was performed:

Partially reconstructed by Walter J. Bilby, U.S. Coast & Geodetic Survey.

Everett H. Kimmell, U. S. Surveyor.

Work performed in September, 1931.

Carl I. Aslakson, C. & G. S. Party Chief.

LOCATION AND DESCRIPTION OF COMPANION CONTROL MONUMENT:

Station: Blue.

Publication:

Pp:

Monument: A U. S. C. & G. S. disk station mark set in outcropping bedrock.

Latitude: 40° 22' 29.649"

Longitude: 109° 03' 53.359"

Elevation:

Remarks relative to above values:

1927 - N. A. Datum.

Directions for finding: Located on the second point of prominence, counting from the southwest end of Stuarts Ridge on Blue Mountain; about 13 miles airline east of Jensen, Utah, about 6 miles north-northwest of the K Ranch on highway 40, and about 2 miles west of the Utah-Colo. State Line. From a point on highway 40, 3.3 mi. W. of the State Line, follow road northward up onto mountain for 11.5 miles; just after reaching top take left fork for 2.1 miles to cross road; turn left and follow road passing through three gates, for about 5 miles and to a point as far as truck can be driven, about 1/2 mile from the station.

Description of reference (or auxiliary) control monuments:

No. 1

A disk reference mark wedged in a drill hole in outcropping bedrock.

Bears: N. 64° 35' 07.0" E.,

Distance: 4.15 meters, 13.610 ft., 0.2062 chs.

No. 2

A disk reference mark wedged in a drill hole in outcropping bedrock.

Bears: N. 54° 54' 05.1" W.,

Distance: 9.428 meters, 30.920 ft., 0.4687 chs.

CONNECTION FROM PUBLIC LAND SURVEY MONUMENT TO:

Companion Control Station: Blue.

Forward azimuth:	175° 46' 52.0"	-	N. 4° 13' 08.0" W.	(Bearing)
Back azimuth:	355° 46' 18.0"	-	S. 4° 13' 42.0" E.	"
Length of line: log Meters:	4.226 412	-	16842.7	Meters
" Feet:		-	55258	Feet
" Chains:		-	837.24	Chains
" Miles:		-	10.4655	Miles

Second Control Station: Rabbit.

Latitude:	39° 53' 17.196"	Longitude:	108° 59' 06.649"
Forward azimuth:	351° 30' 16.7"	-	S. 8° 29' 43.3" E. (Bearing)
Back azimuth:	171° 32' 47.4"	-	N. 8° 27' 12.6" W. "
Length of line: log Meters:	4.575 942	-	37665.3 Meters
" Feet:		-	123574 Feet
" Chains:		-	1872.33 Chains
" Miles:		-	23.4041 Miles

Third Control Station: Little.

Latitude:	40° 31' 15.408"	Longitude:	109° 42' 16.839"
Forward azimuth:	120° 55' 13.6"	-	N. 59° 04' 46.4" W. (Bearing)
Back azimuth:	300° 28' 47.5"	-	S. 59° 31' 12.5" E. "
Length of line: log Meters:	4.810 551	-	64647.4 Meters
" Feet:		-	212097 Feet
" Chains:		-	3213.60 Chains
" Miles:		-	40.1700 Miles

Remarks relative to above values:

1927 - N. A. Datum.

CONVERSION FACTORS:

1 Meter = 3.280 833 Feet	1 Meter = 0.049 7096 Chains
log = 0.515 9842	log = 8.696 4403
1 Meter = 0.000 62137 Miles	1 Chain = 66 Feet
log = 6.793 3503	log = 1.819 5439

GEOGRAPHIC POSITION OF PUBLIC LAND SURVEY MONUMENT

G.L.O. No. 5, Utah.

Tp. 10 S .. Rg. 25 E .. Salt Lake Principal Mer.
 State Utah County Uintah.

Location and description of public land survey monument:

Original monument:

A properly marked limestone, 20x15x8 ins.,
 firmly set in the ground, witnessed by a mound of stone.

New monument: The Standard Corner of secs. 33 and 34, T. 10 S.,
 R. 25 E., Salt Lake Principal Meridian; on the Second
 Standard Parallel South.

A regulation U.S. General Land Office brass tablet,
 set in a concrete post, 14 ins. square at top, 20 ins. square
 at base, 34 ins. long, 30 ins. in the ground, marked:

SC
 T10SR25E
S33 | S34

1931

Set the original stone alongside the new monument.

Latitude: 39° 53' 53.417"

Longitude: 109° 05' 45.922"

Elevation:

Remarks relative to above values:

1927 - N. A. Datum.

Directions for finding the public land survey monument:

From Rangely, Colo., follow main traveled road toward Dragon, Utah; at 31.7 miles intersect Dragon-Vernal road, 5 miles north of Dragon; turn north toward Vernal for 3.8 miles where road forks to the left to Watson, (which is about 6 miles distant) continue straight ahead on main traveled road for 0.75 miles to point where road passes over top of spur and swings to the left. From here the station bears about N. 80° E. and is a little to the northeast of two umbrella shaped trees; turn right and drive up top of spur; cross country, for 0.6 mile to the station.

Description of reference (or auxiliary) public land survey monuments:

No. 1

A regulation U.S. General Land Office brass tablet, set in a concrete post, 12 ins. square at top, 15 ins. square at base, 18 ins. long, 14 ins. in the ground, on bedrock, marked "REFERENCE No. 1, 1931" and arrow pointing toward the station. A similarly marked tablet was cemented in the bedrock for a sub-surface mark.

Bears: S. 83° 59' E., (computed)

Distance: meters, 79.050 ft., 1.1977 chs.

No. 2

A regulation U.S. General Land Office brass tablet, set in a concrete post, 12 ins. square at top, 16 ins. square at base, 19 ins. long, 15 ins. in the ground, on bedrock, marked "REFERENCE No. 2, 1931" and arrow pointing toward the station. A similarly marked tablet was cemented in the bedrock for a sub-surface mark.

Latitude: 39° 53' 52.788"

Longitude: 109° 05' 46.015"

Bears: S. 6° 28' 30" W.,

Distance: 19.532 meters, 64.08 ft., 9.7093 chs.

Name of cadastral engineer who reconstructed the public land survey monument, and of engineer who cooperated in making the geodetic connection, and remarks relative to when the work was performed:

Everett H. Kimmell, U.S. Surveyor.

Work performed in September and October, 1931.

Carl I. Aslakson, U. S. C. & G. S. Party Chief.

LOCATION AND DESCRIPTION OF COMPANION CONTROL MONUMENT:

Station: Cone.

Publication:

Pp:

Monument: A C. & G. S. disk station mark set in concrete.

Latitude: 40° 06' 04.831"

Longitude: 109° 50' 12.679"

Elevation:

Remarks relative to above values:

1927 - N. A. Datum.

Directions for finding: Located about 7 miles airline west by north of Ouray, Utah; about 9 miles south by west of Randlett; on a cone shaped butte at the southeast end of Leland Bench. From Randlett go west 2.9 miles; turn left and follow road southward for 2 miles; turn left for 0.55 miles; take right fork for 0.05 miles; take right fork for 1.35 miles; take right fork for 0.05 miles; take right fork for 0.7 miles; take right fork for 0.05 miles; take left fork for 1.15 miles; take left fork for 0.3 miles to cross-road; keep straight ahead for $1\frac{1}{4}$ miles; take left fork for 2.4 miles; leave road, turn left along top of ridge for about $\frac{1}{2}$ mile, as far as truck can be driven. Station is about $\frac{1}{4}$ mile eastward.

Description of reference (or auxiliary) control monuments:

No. 1

A C. & G. S. disk reference mark set in cement on top of a 4 in. galvanized iron pipe, on the highest point of first knoll west of station.

Bears: N. 73° 31' 15.2" W., approx. $\frac{1}{4}$ mile dist.

Distance: meters, ft., chs.

No. 2

A C. & G. S. disk reference mark on top of a 4 in. iron pipe.

Bears: N. 27° 53' 15.4" W.,

Slope Distance: 5.08 meters, 16.7 ft., 0.253 chs.

CONNECTION FROM PUBLIC LAND SURVEY MONUMENT TO:

Companion Control Station: Cone.

Forward azimuth:	109° 52' 50.35"	-	N. 70° 07' 09.65" W.	(Bearing)
Back azimuth:	289° 24' 16.24"	-	S. 70° 35' 43.76" E.	"
Length of line: log Meters:	4.827 1426	-	67164.94	Meters
" Feet:		-	220357.0	Feet
" Chains:		-	3338.749	Chains
" Miles:		-	41.73434	Miles

Second Control Station: Range.

Latitude:	39° 35' 20.609"	Longitude:	110° 16' 53.484"	
Forward azimuth:	71° 43' 32.95"	-	S. 71° 43' 32.95" W.	(Bearing)
Back azimuth:	250° 58' 04.47"	-	N. 70° 58' 04.47" E.	"
Length of line: log Meters:	5.030 3541	-	107239.33	Meters
" Feet:		-	351834.4	Feet
" Chains:		-	5330.835	Chains
" Miles:		-	66.63530	Miles

~~Third Control Station:~~ G. L. O. Cor. No. 5.

Latitude:		Longitude:		
Forward azimuth:	186° 28' 30"	-	N. 6° 28' 30" E.	(Bearing)
Back azimuth:	6° 28' 30"	-	S. 6° 28' 30" W.	"
Length of line: log Meters:	1.290 747	-	19.532	Meters
" Feet:		-	64.08	Feet
" Chains:		-	9.7093	Chains
" Miles:		-		Miles

Remarks relative to above values:

1927 - N. A. Datum.

CONVERSION FACTORS:

1 Meter = 3.280 833 Feet
log = 0.515 9842

1 Meter = 0.049 7096 Chains
log = 8.696 4403

1 Meter = 0.000 62137 Miles
log = 6.793 3503

1 Chain = 66 Feet
log = 1.819 5439

GEOGRAPHIC POSITION OF PUBLIC LAND SURVEY MONUMENT

G.L.O. No. 6, Utah.

Tps. 20 S .. Rgs. 23 & 24 E., Salt Lake Principal Mer.
 State Utah County Grand.

Location and description of public land survey monument:

Original monument:

A properly marked sandstone, 15x8x2 ins.,
 firmly set in the ground; witnessed by the original pits.

The Standard Corner of secs. 31 and 36, Ts. 20 S.,
 Rs. 23 and 24 E., Salt Lake Principal Meridian; on the
 4th Standard Parallel South, and the Grand River Guide Mer.

New monument: A regulation U.S. General Land Office brass tablet,
 set in a concrete post, 14 ins. square at top, 20 ins. square
 at base, 34 ins. long, 30 ins. in the ground, marked:

SC	
T20S	
R23E	R24E
S36	S31

1931	

Set the original stone alongside the new monument.

Latitude: 39° 00' 57.614"

Longitude: 109° 18' 45.917"

Elevation:

Remarks relative to above values:

1927 - N. A. Datum.

Directions for finding the public land survey monument:

At the east edge of the town of Cisco, Utah, cross railroad and follow old abandoned highway northeast, keeping right hand fork, for 3.6 miles to point where two forks of the old highway and an old railroad grade intersect. From here the station is about $\frac{1}{4}$ mile S.60°E. Truck can be driven cross country to the station.

Description of reference (or auxiliary) public land survey monuments:

No. 1

A regulation U.S. General Land Office brass tablet, set in a concrete post, 12 ins. square at top, 18 ins. square at base, 34 ins. long, 30 ins. in the ground, marked "REFERENCE No. 1, 1931" and arrow pointing toward the station.

Bears: N. 16° 49' 51.8" E.,

Distance: 25.427 meters, 83.42 ft., 1.2640 chs.

No. 2

A regulation U.S. General Land Office brass tablet, set in a concrete post, 12 ins. square at top, 18 ins. square at base, 34 ins. long, 30 ins. in the ground, marked "REFERENCE No. 2, 1931" and arrow pointing toward the station.

Bears: N. 73° 11' 50.8" W.,

Distance: 21.137 meters, 69.35 ft., 1.0507 chs.

Name of cadastral engineer who reconstructed the public land survey monument, and of engineer who cooperated in making the geodetic connection, and remarks relative to when the work was performed:

Everett H. Kimmell, U.S. Surveyor.

Work performed in October, 1931.

Carl I. Aslakson, U. S. C. & G. S. Party Chief.

LOCATION AND DESCRIPTION OF COMPANION CONTROL MONUMENT:

Station: Mt. Waas.

Publication: U. S. C. & G. S. Special Publication No. 160.

Pp:

Monument: A C. & G. S. disk station mark set in concrete.

Latitude: 38° 32' 20.856"

Longitude: 109° 13' 37.750"

Elevation:

Remarks relative to above values:

1927 - N. A. Datum.

Directions for finding: Located on the highest point of Mt. Waas, which is the third prominent peak from the north end of the La Sal Mountains.

The station is best reached by trail, from the vicinity of Castleton. It is about a 3½ hours ride to the base of the mountain and an hours climb to the top.

Description of reference (or auxiliary) control monuments:

No. 1

Bears:

Distance: meters, ft., chs.

No. 2

A disk reference mark set in concrete.

Bears: S. 17° 00' 37.8" E.,

Distance: 28.658 meters, 94.02 ft., 1.4246 chs.

CONNECTION FROM PUBLIC LAND SURVEY MONUMENT TO:

Companion Control Station: Mt. Waas.

Forward azimuth:	351° 58' 27.9"	-	S. 8° 01' 32.1" E.	(Bearing)
Back azimuth:	172° 01' 40.9"	-	N. 7° 58' 19.1" W.	"
Length of line: log Meters:	4.728 010	-	53457.7	Meters
" Feet:		-	175386	Feet
" Chains:		-	2657.36	Chains
" Miles:		-	33.2170	Miles

Second Control Station: Tavaputs.

Latitude:	39° 32' 23.278"	Longitude:	109° 00' 18.715"	
Forward azimuth:	204° 26' 00.6"	-	N. 24° 26' 00.6" E. (Bearing)	
Back azimuth:	24° 37' 41.6"	-	S. 24° 37' 41.6" W. "	
Length of line: log Meters:	4.805 640	-	63920.5	Meters
" Feet:		-	209713	Feet
" Chains:		-	3177.46	Chains
" Miles:		-	39.7183	Miles

Third Control Station:

Latitude:		Longitude:	
Forward azimuth:		-	(Bearing)
Back azimuth:		-	"
Length of line: log Meters:		-	Meters
" Feet:		-	Feet
" Chains:		-	Chains
" Miles:		-	Miles

Remarks relative to above values:

1927 - N. A. Datum.

CONVERSION FACTORS:

1 Meter = 3.280 833 Feet	1 Meter = 0.049 7096 Chains
log = 0.515 9842	log = 8.696 4403
1 Meter = 0.000 62137 Miles	1 Chain = 66 Feet
log = 6.793 3503	log = 1.819 5439

GEOGRAPHIC POSITION OF PUBLIC LAND SURVEY MONUMENT

G.L.O. No. 7, Utah.

(No. 7, Colorado.)

Tp. .. Rg. .. Mer.
 State Utah - Colorado. County Grand - Mesa.

Location and description of public land survey monument:

Original monument:

A cedar post marked "138 M" on the south face,
 "U" on the west face, and "C" on the east face.

Mile Post 138, Colorado - Utah Boundary.

New monument:

A regulation U.S. General Land Office brass tablet,
 set in a concrete monument, marked:

138 M
 UTAH ▲ COLO
 1931

A U.S. Coast and Geodetic Survey brass tablet was set
 in concrete, below this monument, for a sub-surface mark.

Latitude:

Longitude:

Elevation:

Remarks relative to above values:

No connection made.

2
 Directions for finding the public land survey monument:

From R.R. crossing on Main Street, Grand Junction, Colo. go west, crossing river, for 0.9 miles; take left fork (Serpent Trail) for 12.5 miles to Glade Park Store; keep straight ahead west on main road for 22.5 miles to the Gordon Ranch on the right side of the road; from Gordon farmyard go north through gate on east side of corral and follow road through pasture and across meadow to gate on north side; pass through gate, turn east on north side of fence and go 0.15 miles; turn left and follow road for 1.05 miles; take left fork for 1.05 miles; take left fork for $\frac{1}{4}$ mile; take left fork for 0.1 mile to end of road; from here head for trimmed double cedar (325° Mag.) at foot of second patch of rock outcrop, which is to the right of near bluff, a little over $\frac{1}{2}$ mile distant; from this tree follow blazed trail north, up over rock ~~xxxx~~ and through cedars, for about $\frac{1}{4}$ mile to the station, which is about 75 yds. west of the east edge of cedars.

No reference marks were established.

Bears:

Distance: meters, ft., chs.

No. 2

Bears:

Distance: meters, ft., chs.

Name of cadastral engineer who reconstructed the public land survey monument, and of engineer who cooperated in making the geodetic connection, and remarks relative to when the work was performed:

Station monumented by Walter J. Bilby, U.S.C. & G. Survey.
 Everett H. Kimmell, U.S. Surveyor.

Work performed in October, 1931.

Blank

Page

CONNECTION FROM PUBLIC LAND SURVEY MONUMENT TO:

Companion Control Station:

Forward azimuth:	-	(Bearing)
Back azimuth:	-	"
Length of line: log Meters:	-	Meters
" Feet:	-	Feet
" Chains:	-	Chains
" Miles:	-	Miles

Second Control Station:

Latitude:	Longitude:	
Forward azimuth:	-	(Bearing)
Back azimuth:	-	"
Length of line: log Meters:	-	Meters
" Feet:	-	Feet
" Chains:	-	Chains
" Miles:	-	Miles

Third Control Station:

Latitude:	Longitude:	
Forward azimuth:	-	(Bearing)
Back azimuth:	-	"
Length of line: log Meters:	-	Meters
" Feet:	-	Feet
" Chains:	-	Chains
" Miles:	-	Miles

Remarks relative to above values:

CONVERSION FACTORS:

1 Meter = 3.280 833 Feet
log = 0.515 9842

1 Meter = 0.049 7096 Chains
log = 8.696 4403

1 Meter = 0.000 62137 Miles
log = 6.793 3503

1 Chain = 66 Feet
log = 1.819 5439

GEOGRAPHIC POSITION OF PUBLIC LAND SURVEY MONUMENT

G.L.O. No. 8, Utah.

(No. 11, Colorado)

Tp. ., Rg. ., Mer.

State Utah - Colorado. County San Juan - San Miguel.

Location and description of public land survey monument:

Original monument:

This station was not visited by G. L. O. Party.

U. S. C. & G. S. Party report the cor. as being an iron post, with brass cap, reinforced with concrete; on which they added the marks "USC&GS 1934".

New monument:

Mile Post No. 70, on the Utah - Colorado Boundary.

Latitude: 38° 00' 25.908"

Longitude: 109° 02' 31.790"

Elevation:

Remarks relative to above values:

1927 - N. A. Datum.

Directions for finding the public land survey monument:

Station is on the Utah - Colorado Boundary, about 12 miles northwest of Dove Creek, Colo. and about 20 miles E. by N. of Monticello, Utah.

Description of reference (or auxiliary) public land survey monuments:

No. 1

Bears:

Distance: meters, ft., chs.

No. 2

Bears:

Distance: meters, ft., chs.

Name of cadastral engineer who reconstructed the public land survey monument, and of engineer who cooperated in making the geodetic connection, and remarks relative to when the work was performed:

Connections made by E. B. Latham, U. S. C. & G. S., 1934.

LOCATION AND DESCRIPTION OF COMPANION CONTROL MONUMENT:

Station: Summit.

Publication:

Pp:

Monument: A U. S. C. & G. S. disk station mark wedged in a drill hole in outcropping bedrock.

Latitude: 38° 00' 23.016"

Longitude: 108° 59' 37.569"

Elevation:

Remarks relative to above values:

1927 - N. A. Datum.

Directions for finding:

Station is located in the northwest part of T. 43 N., R. 19 W., about 15 miles northwest of Dove Creek, Colo., about 20 miles E. by N. of Monticello, Utah, and about 5 miles E. of the Summit Post Office, on the edge of a flat, wooded plateau.

Description of reference (or auxiliary) control monuments:

No. 1

A disk reference mark wedged in a drill hole in outcropping bedrock.

Bears: N. 29° 25' 21.7" E.,

Distance: 27.872 meters, 91.44 ft., 1.3855 chs.

No. 2

A disk reference mark wedged in a drill hole in outcropping bedrock.

Bears: S. 47° 36' 43.3" E.,

Distance: 13.807 meters, 45.30 ft., 0.6863 chs.

CONNECTION FROM PUBLIC LAND SURVEY MONUMENT TO:

Companion Control Station: **Summit.**

Forward azimuth:	271° 11' 12.6"	-	S. 88° 48' 47.4" E.	(Bearing)
Back azimuth:	91° 12' 59.9"	-	N. 88° 47' 00.1" W.	"
Length of line: log Meters:	3.628 520	-	4251.3	Meters
" Feet:		-	13948	Feet
" Chains:		-	211.33	Chains
" Miles:		-	2.6416	Miles

Second Control Station: **Mt. Waas.**

Latitude:	38° 32' 20.856"	Longitude:	109° 13' 37.750"	
Forward azimuth:	164° 43' 31.0"	-	N. 15° 16' 29.0" W.	(Bearing)
Back azimuth:	344° 36' 38.4"	-	S. 15° 23' 21.6" E.	"
Length of line: log Meters:	4.786 913	-	61222.8	Meters
" Feet:		-	200862	Feet
" Chains:		-	3043.36	Chains
" Miles:		-	38.0420	Miles

Third Control Station: **Spruce. (USGS)**

Latitude:	38° 26' 03.486"	Longitude:	108° 30' 09.193"	
Forward azimuth:	224° 44' 24.8"	-	N. 44° 44' 24.8" E.	(Bearing)
Back azimuth:	45° 04' 26.7"	-	S. 45° 04' 26.7" W.	"
Length of line: log Meters:	4.825 660	-	66936.0	Meters
" Feet:		-	219606	Feet
" Chains:		-	3327.36	Chains
" Miles:		-	41.5920	Miles

Remarks relative to above values:

1927 - N. A. Datum.

CONVERSION FACTORS:

1 Meter - 3.280 833 Feet	1 Meter - 0.049 7096 Chains
log = 0.515 9842	log = 8.696 4403
1 Meter - 0.000 62137 Miles	1 Chain - 66 Feet
log = 6.793 3503	log = 1.819 5439

GEOGRAPHIC POSITION OF PUBLIC LAND SURVEY MONUMENT
(Station FOURCORNERS)

G.L.O. No. 9, Utah.

(No.16, Colo.) (No.1, Ariz.) (No.1, N.M.)

Tp.

.. Rg.

..

Mer.

State Utah-Colo.-Ariz.-N.Mex. County San Juan-Montezuma-Apache-San Ju

Location and description of public land survey monument:

Original monument:


A limestone, 53x13x6 ins., broken in four pieces, with the lower end still firmly set in the ground, marked "OOL" on the northeast, "N.Mex" on the southeast, "Arizona" on the southwest, and "Utah" on the northwest; surrounded by a large mound of stone. The original stone deposit was also found, beneath this monument; a hard sandstone, 8x6x5 ins., marked "37°NL 32°WL and "1875".

This is the monument set by Chandler Robbins, U.S. Astronomer and Surveyor, for the Initial Monument of the New Mexico - Arizona Boundary, in 1875.

The Corner common to the four States: Utah, New Mexico, Arizona and Colorado.

New monument:

A regulation U.S. General Land Office brass tablet, set in a concrete monument, 14 ins. square at top, 28 ins. square at base, 56 ins. long, 38 ins. in the ground, marked:



A similarly marked tablet was set in concrete, for sub-surface mark, 40 ins. below surface of ground.

Latitude: 36° 59' 56.30"

Longitude: 109° 02' 40.24"

Elevation:

Remarks relative to above values:

1927 - N. A. Datum.

No check on this position.

Directions for finding the public land survey monument:

From Shiprock Indian Agence, go south for 0.6 miles on Highway 666; turn right and follow Rattlesnake Oil Field Road for 6.3 miles; take right fork for 16.0 miles to trading post; continue on main road for 7.8 miles; turn right and go 0.45 miles; take right fork for 2.8 miles; take left fork for 0.35 miles; take left fork and continue straight ahead for 0.5 miles; take left fork for 1.6 miles; take left fork for 1.7 miles; take left fork for 0.4 miles; then take left fork for 0.1 miles to the corner.

Description of reference (or auxiliary) public land survey monuments:

No. 1

A regulation U.S. General Land Office brass tablet, set in a concrete post, 12 ins. square at top, 18 ins. square at base, 34 ins. long, 32 ins. in the ground, marked "REFERENCE No. 1, 1931" and arrow pointing toward the corner.

Easterly.

Bears:

Distance: 22.870 meters, 75.03 ft., 1.1369 chs.

No. 2

A regulation U.S. General Land Office brass tablet, set in a concrete post, 12 ins. square at top, 18 ins. square at base, 34 ins. long, 30 ins. in the ground, marked "REFERENCE No. 2, 1931, and arrow pointing toward the corner.

Westerly.

Bears:

Distance: 22.860 meters, 75.00 ft., 1.1364 chs.

Name of cadastral engineer who reconstructed the public land survey monument, and of engineer who cooperated in making the geodetic connection, and remarks relative to when the work was performed:

Everett H. Kimmell, U.S. Surveyor.

Station monumented October 23, 1931.

Connections made by E. B. Latham, U. S. C. & G. S., 1934.

LOCATION AND DESCRIPTION OF COMPANION CONTROL MONUMENT:

Station: Eccentric Station to Station FOURCORNERS.

Publication:

Pp:

Monument:

A U.S. General Land Office brass tablet, set in a concrete monument, 14 ins. square at top, 20 ins. square at base, 40 ins. long, 34 ins. in the ground, marked "REFERENCE No. 3, 1931", and arrow pointing toward the corner.

Latitude: 37° 00' 05.244"

Longitude: 109° 02' 42.158"

Elevation:

Remarks relative to above values:

1927 - N. A. Datum.

Directions for finding:

See directions to G.L.O. No. 9.

Description of reference (or auxiliary) control monuments:

No. 1

Bears:

Distance: meters, ft., chs.

No. 2

Bears:

Distance: meters, ft., chs.

CONNECTION FROM PUBLIC LAND SURVEY MONUMENT TO:

Companion Control Station; **Madden.**

Forward azimuth:	242° 50' 55.6"	-	N. 62° 50' 55.6" E.	(Bearing)
Back azimuth:	63° 25' 00.9"	-	S. 63° 25' 00.9" W.	"
Length of line: log Meters:	4.971 024	-	93545.7	Meters
" Feet:		-	306908	Feet
" Chains:		-	4650.12	Chains
" Miles:		-	58. 1265	Miles

Second Control Station: **Ute.**

Latitude:	37° 17' 02.714"	Longitude:	108° 46' 40.828"	
Forward azimuth:	217° 01' 25.4"	-	N. 37° 01' 25.4" E. (Bearing)	
Back azimuth:	37° 11' 05.8"	-	S. 37° 11' 05.8" W. "	
Length of line: log Meters:	4.594 703	-	39328.1	Meters
" Feet:		-	129029	Feet
" Chains:		-	1954.98	Chains
" Miles:		-	24.4373	Miles

~~Third Control~~ Station: **Fourcorners** (G.L.O. Cor. No. 9)

Latitude:		Longitude:		
Forward azimuth:	350° 15' 50"	-	S. 9° 44' 10" E. (Bearing)	
Back azimuth:	170° 15' 51"	-	N. 9° 44' 09" W. "	
Length of line: log Meters:	2.446 845	-	279.798	Meters
" Feet:		-	917.97	Feet
" Chains:		-	13.9086	Chains
" Miles:		-		Miles

Remarks relative to above values:

1927 - N. A. Datum.

CONVERSION FACTORS:

1 Meter - 3.280 833	Feet	1 Meter - 0.049 7096	Chains
log - 0.515 9842		log - 8.696 4403	
1 Meter - 0.000 62137	Miles	1 Chain - 66	Feet
log - 6.793 3503		log - 1.819 5439	

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD NOTES

of the

Dependent Resurvey

of the

Utah-Arizona State Boundary

between

Mile Post 243 and the Four Corners Monument

with the

Establishment of Corners to Govern Surveys in Utah

Of the _____ Meridian,

In the State of _____

EXECUTED BY

Robert C. Yundt, Cartographer-Cadastral

Under special instructions dated July 28, 1953, which provided for the surveys included under Group No. 386-Utah, approved July 31, 1953 and assignment instructions dated July 31, 1953.

Survey commenced August 12, 1953


Survey completed October 28, 1953

INDEX DIAGRAM

Township _____, Range _____

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

INDEX DIAGRAM
GROUP 386

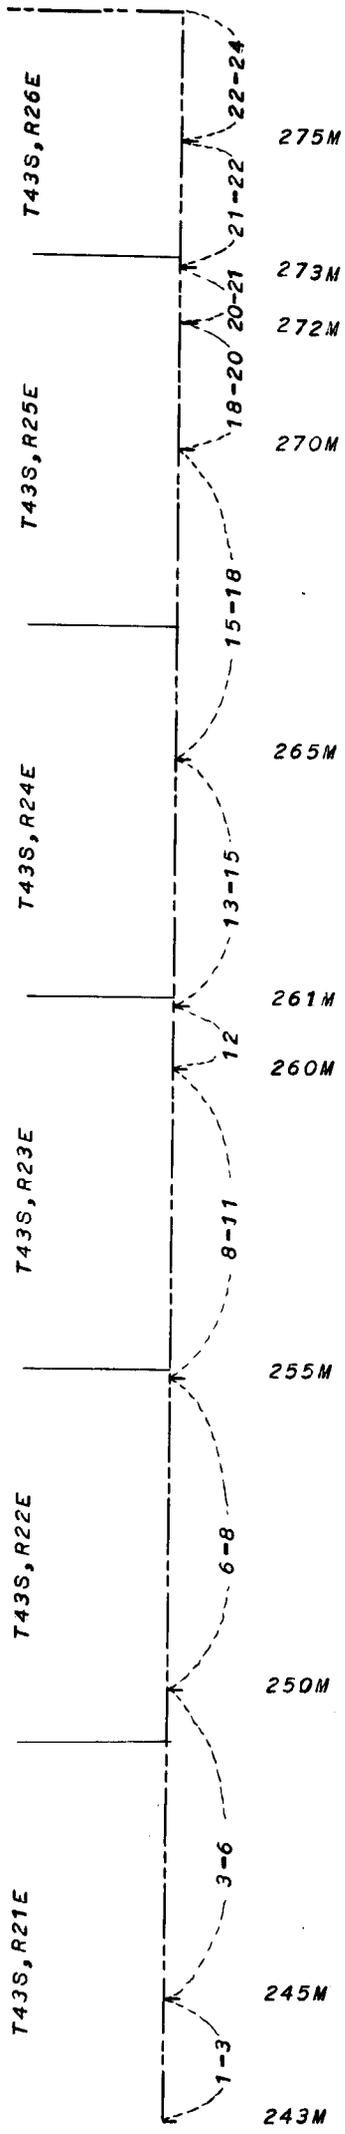

UTAH-ARIZONA BOUNDARY

18 12
 2 2 2
 2 2 2
 2 2 2

1948

1948

1948

1948

1948

1948

1948

1948

DEPENDENT RESURVEY OF PORTION OF THE
UTAH-ARIZONA STATE BOUNDARY LINE

The boundary between Utah and Arizona was originally surveyed by Howard B. Carpenter, U. S. Surveyor and Astronomer, in 1901. The following field notes are those of a dependent resurvey of a portion of this line and an establishment thereon of cors. to govern the sub-divisional survey in Utah in Rs. 21 to 26 inclusive. This resurvey is a restoration of the original survey according to the identified evidence of that survey, only the identified original mile posts being remonumented. The cors., along this line for the surveys in Utah, were established at predetermined distances westward from the Four Corners monument. Only the true line notes, referring to the completed resurvey, are given here. The resurvey was made at the request of several oil companies in order to identify boundaries of their leases from the Bureau of Indian Affairs.

The resurvey was commenced August 7, 1953, and was executed with Buff and Buff solar transits Nos. 14191 and 26594, property of the Bureau of Land Management. The instruments have horizontal plates provided with two double verniers, and full vertical circles with one double vernier. All verniers are graduated to single minutes of arc. Since the solar attachments of the instruments were not used, no description of them will be given here. The instruments were in good condition and, prior to the beginning of the field work, were tested and found free from error. They were maintained in good adjustment throughout the field work. The azimuth of the lines of the survey was determined by observations on Polaris or altitude observations on the sun. The geographic position of the Four Corners monument, determined by the Coast and Geodetic Survey, is as follows: latitude, 36°59' 56.30" N. and longitude, 109°02'40.24" W.

The bearings of the lines of the resurvey were determined by either altitude observations on the sun or hour angle observations on Polaris made on line during the progress of the resurvey.

The measurements were made with Chicago steel ribbon tapes, 8 chs. in length. These tapes are graduated every lk. for the first ch. and thereafter at intervals of ten lks. The tapes were tested by comparison with a Lufkin standard steel tape, one ch. in length, and found to be correct. The measurements were made on the slope, the vertical angle of each interval determined by the use of a clinometer, and the slope distances properly reduced to the horizontal equivalents, which appear in these notes.

DEPENDENT RESURVEY OF THE UTAH-ARIZONA STATE BOUNDARY
LINE BETWEEN THE 243RD MILE POST AND THE FOUR CORNERS MONUMENT

Reestablishment of the survey executed by Howard
W. Carpenter, U.S. Surveyor and Astronomer in
1901.

Beginning at the 243rd mile post of the Utah-Arizona state line marked by a shattered sandstone rock bearing the remains of the original markings and witnessed by a mound of stone to the east.

At the same point.

Set an iron rod 12 ins. long, 5/8 ins. in diam., 8 ins. in a hole drilled into solid surface rock, over which I set an iron post 30 ins. long and 2 1/2 ins. in diam. in a large mound of stone, with brass cap marked

243M
UTAH

ARIZ
1953

Deposit broken glass and the remains of the original stone alongside the iron post.

Thence

S. 89°59' E. along the 244th mile.
Over rolling land through widely scattered timber and scant undergrowth.


DEPENDENT RESURVEY OF PORTION OF THE
UTAH-ARIZONA STATE BOUNDARY LINE

Chains

11.82

The cor. of T. 43 S., Rs. 20 and 21 E. Utah established at a point 2710.50 chs. westward in departure from the Four Corners monument.

Set an iron rod 10 ins. long and 5/8 ins. in diam., 6 ins. in a hole drilled into solid sandstone in the center of a cross (X) cut into the rock. Over this pin I set an iron post 30 ins. long and 2 1/2 ins. in diam. in a large mound of stone, with brass cap marked



ARIZ

1953

15.85

Spur projects S. 20° W. descend along a SE. slope.

23.30

Small draw, drains S. 25° W. ascend along a NW. slope.

37.91

Unimproved road bears N. 60° E. and S. 60° W.

51.82

On top of a sandstone ridge bearing N. and S., the 1/4 sec. cor. of sec. 31, T. 43 S., R. 21 E. Utah.

Set an iron rod 10 ins. long and 5/8 ins. in diam., 6 ins. in a hole drilled into solid sandstone in the center of a cross (X) cut into the rock. Over this rod I set an iron post 30 ins. long and 2 1/2 ins. in diam. in a large mound of stone, with brass cap marked

1/4 S31

ARIZ

1953

79.99

Point for the 244th mile post at proportionate distance. No trace of the post can be found. Continue same line with continuous measurement along the 245th mile.

91.82

The cor. of secs. 31 and 32, T. 43 S., R. 21 E. Utah.

Over a cross (X) cut in solid rock, set an iron post 30 ins. long and 2 1/2 ins. in diam. in a large mound of stone, with brass cap marked



ARIZ

1953

114.30

Shallow wash drains SW.

119.90

Unimproved road bears N. 20° W. and S.

131.82

The 1/4 sec. cor. of sec. 32, T. 43 S., R. 21 E. Utah.

Set an iron post 30 ins. long and 2 1/2 ins. in diam., 24 ins. in the ground, with brass cap marked

1/4 S32

ARIZ

1953

Deposit broken glass and a limestone rock 6x4x3 ins., marked with a cross (X) at the base of the post.

140.20

Unimproved road bears N. 45° E. and S.

DEPENDENT RESURVEY OF PORTION OF THE
UTAH-ARIZONA STATE BOUNDARY LINE

Chains

- 141.90 Unimproved road, bears N. 20°W. and S. 30° E.
- 148.10 Unimproved road, bears N. and S.
- 150.00 Unimproved road, bears N. and S.
- 159.98 Intersect the 245th mile post of the Utah-Arizona state line marked by a sandstone rock 28x8x7 ins. firmly set in ground and in a mound of stone and marked 245M on the west, UTAH on the north, ARIZ on the south and 37NL on the east faces.

At the same point.

Set an iron post, 30 ins. long and 2½ ins. in diam., 24 ins. in the ground, with brass cap marked

245M

UTAH

ARIZ

1953

Deposit broken glass at the base of the post and bury the original stone alongside.

Rebuild the mound of stone to the north.

Land, rolling flat.

Soil, sandy clay

Timber, widely scattered juniper

Undergrowth, shadscale, weeds and grass

N89°16'E. along the 246th mile.

Over rolling land through widely scattered timber and a scant undergrowth; ascend along a NW. slope.

8.00 Top of broken north slope of bench bears NE. and SW.

11.84 The cor. of sections 32 and 33, Township 43 S., R. 21 E., Utah.

Set an iron post 30 ins. long and 2½ ins. in diam., 12 ins. in the ground, to solid rock and in a mound of stone with brass cap marked

T43S | R21E

S32 | S33

ARIZ

1953

Deposit broken glass at the base of the post.

Continue across broken top.

17.00 Spur projects N.; descend along a SE. slope.

51.845 The ¼ sec. cor. of sec. 33, T. 43 S., R. 21 E.

Set an iron post 30 ins. long and 2½ ins. in diam., 26 ins. in the ground, with brass cap marked

¼S33

ARIZ

1953

Raise a mound of stone 2½ ft. base and 1½ ft. high N. of the post.

DEPARTMENT OF THE INTERIOR
 BUREAU OF LAND MANAGEMENT
 UTAH-ARIZONA STATE BOUNDARY LINE

Chains		meters				
55.00	Draw, drains SW.	08.131				
65.10	Unimproved road bears N. and S.	01.249				
70.50	Draw drains S. 15° W; ascend along a NW. slope.	00.031				
80.00	Point for the 246th mile post at proportionate distance. No trace of this point can be found--continue on same line with continuous measurement along the 247th mile.	00.000				
91.850	The cor. of secs. 33 and 34, T. 43 S., R. 21 E., Utah. Set an iron post, 30 ins. long and 2½ ins. in diam., 18 ins. in the ground to solid rock and in a mound of stone, with brass cap marked <table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td>T43S</td> <td>R21E</td> </tr> <tr> <td>S33</td> <td>S34</td> </tr> </table> <p style="text-align: center;">ARIZ</p> <p style="text-align: center;">1953</p> Deposit broken glass and a limestone rock 4x3x2 ins., marked with a cross (X) at the base of the post.	T43S	R21E	S33	S34	
T43S	R21E					
S33	S34					
131.85	The ¼ sec. cor. of sec. 34, T. 43 S., R. 21 E. Set an iron post, 30 ins. long and 2½ ins. in diam., 20 ins. in the ground to solid rock and in a mound of stone, with brass cap marked <table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td>¼S34</td> </tr> </table> <p style="text-align: center;">ARIZ</p> <p style="text-align: center;">1953</p> Deposit broken glass at the base of the post.	¼S34				
¼S34						
144.00	Draw drains S. 50° W.					
150.05	Graded road, bears N. 57°30' E. and S. 57°30' W., from Shiprock, N.M. to Kayenta, Ariz.					
154.90	Draw, drains SW.					
160.01	Point for the 247th mile post at proportionate distance. No trace of this post can be found--continue on same line with continuous measurement along the 248th mile.					
171.85	The cor. of secs. 34 and 35, T. 43 S., R. 21 E. Set an iron post 30 ins. long and 2½ ins. in diam., 22 ins. in the ground to solid rock and in a mound of stone, with brass cap marked <table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td>T43S</td> <td>R21E</td> </tr> <tr> <td>S34</td> <td>S35</td> </tr> </table> <p style="text-align: center;">ARIZ</p> <p style="text-align: center;">1953</p> Deposit broken glass and a limestone rock, 5x4x1½ ins. marked with a cross (X) at the base of the post.	T43S	R21E	S34	S35	
T43S	R21E					
S34	S35					
189.45	Low spur projects S.					
211.40	Shallow draw drains S.					
211.855	The ¼ sec. cor. of sec. 35, T. 43 S., R. 21 E.					

5

DEPENDENT RESURVEY OF PORTION OF THE
UTAH-ARIZONA STATE BOUNDARY LINE

Chains							
	<p>Set an iron post, 30 ins. long and $2\frac{1}{2}$ ins. in diam., 20 ins. in the ground to solid rock and in a mound of stone, with brass cap marked</p> <p style="text-align: center;"><u>1/4S35</u></p> <p style="text-align: center;">ARIZ</p> <p style="text-align: center;">1953</p> <p>Deposit broken glass at the base of the post.</p>						
216.20	Unimproved road, bears N. and S.						
240.02	Point for the 248th mile post at proportionate distance. No trace of this post can be found--continue on same line with continuous measurement along the 249th mile.						
251.86	<p>The cor. of secs. 35 and 36, T. 43 S., R. 21 E., Utah.</p> <p>Set an iron post, 30 ins. long and $2\frac{1}{2}$ ins. in diam., 24 ins. in the ground, with brass cap marked</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td>T43S</td> <td>R21E</td> </tr> <tr> <td>S35</td> <td>S36</td> </tr> </table> <p style="text-align: center;">ARIZ</p> <p style="text-align: center;">1953</p> <p>Deposit a limestone rock, 6x4x2 ins., marked with a cross (X) at the base of the post. This cor. is located about 100 ft. S. of an EW. road.</p>	T43S	R21E	S35	S36		
T43S	R21E						
S35	S36						
255.05	Graded road, bears N. $62^{\circ}30'$ W. and S. $62^{\circ}30'$ E., Kayenta, Arizona to Shiprock, N. M.						
291.865	<p>The $\frac{1}{4}$ sec. cor. of sec. 36, T. 43 S., R. 21 E., Utah.</p> <p>Set an iron post 30 ins. long and $2\frac{1}{2}$ ins. in diam., 24 ins. in the ground, with brass cap marked</p> <p style="text-align: center;"><u>1/4S36</u></p> <p style="text-align: center;">ARIZ</p> <p style="text-align: center;">1953</p>						
320.03	Point for the 249th mile post at proportionate distance. No trace of this post can be found--continue on same line with continuous measurement along the 250th mile.						
331.87	<p>The cor. of T. 43 S., Rs. 21 and 22 E., Utah at a point 2230.50 chs. W. in departure from the Four Corners monument.</p> <p>Set an iron post, 30 ins. long and $2\frac{1}{2}$ ins. in diam., 24 ins. in the ground, with brass cap marked</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td>T43S</td> <td></td> </tr> <tr> <td>R21E</td> <td>R22 E</td> </tr> <tr> <td>S36</td> <td>S31</td> </tr> </table> <p style="text-align: center;">ARIZ</p> <p style="text-align: center;">1953</p> <p>Raise a mound of stone 3 ft. base and 2 ft. high, N. of the post.</p>	T43S		R21E	R22 E	S36	S31
T43S							
R21E	R22 E						
S36	S31						
342.10	Low spur, projects NE.						
371.87	The $\frac{1}{4}$ sec. cor. of sec. 31, T. 43 S., R. 22 E., Utah.						

DEPENDENT RESURVEY OF PORTION OF THE
UTAH-ARIZONA STATE BOUNDARY LINE

Chains

Set an iron post, 30 ins. long and 2 1/2 ins. in diam., 24 ins. in the ground, with brass cap marked

1831

ARIZ

1953

Deposit broken glass at the base of the post.

387.00 Unimproved road, bears N. 30° E. and S 30° W.

400.01 The 250th mile post, marked by a sandstone shaft, 60x18x10 ins., firmly set in the ground and marked UTAH on the N., L37N on the east, ARIZ on the S. and 250M on the west faces.

At the same point.

Set an iron post, 30 ins. long and 2 1/2 ins. in diam., 24 ins. in the ground, with brass cap marked

250M

UTAH

ARIZ

1953

Deposit the original stone to the S. of the iron post.

Land, rolling desert.

Soil, sandy clay.

Timber, widely scattered juniper.

Undergrowth, shadscale, weeds, grass.

East along the 251st mile of the Utah-Arizona state line.

Over rolling land, through a scant undergrowth.

11.87 The cor. of secs. 31 and 32, T. 43 S., R. 22 E., Utah.

Set an iron post 30 ins. long and 2 1/2 ins. in diam., 24 ins. in the ground, with brass cap marked

T43S	R22E
S31	S32

ARIZ

1953

Deposit broken glass at the base of the post.

25.80 Road, bears N. and S15° E.

51.87 The 1/4 sec. cor. of sec. 32, T. 43 S., R. 22 E., Utah.

Set an iron post, 30 ins. long and 2 1/2 ins. in diam., 24 ins. in the ground, with brass cap marked

1832

ARIZ

1953

Deposit broken glass at the base of the post.

DEPENDENT RESERVE OF PORTION OF THE
UTAH-ARIZONA STATE BOUNDARY LINE

Chains

80.04 Point for the 251st mile post at proportionate distance. There is no remaining evidence of this post--continue on same line with continuous measurement along the 252nd mile.

91.87 The cor. of secs. 32 and 33., T. 43 S., R. 22 E., Utah.
Set an iron post 30 ins. long and 2 1/2 ins. in diam., 24 ins. in the ground, with brass cap marked

T43S R22E
S32 S33

ARIZ
1953

Deposit broken glass at the base of the post.

95.54 Road, bears NE. and S. 30° W.

131.87 The 1/4 sec. cor. of sec. 33, T. 43 S., R. 22 E., Utah.
Set an iron post, 30 ins. long and 2 1/2 ins. in diam., 24 ins. in the ground, with brass cap marked.

1/4 S33

ARIZ
1953

160.08 Point for the 252nd mile post at proportionate distance. There is no remaining evidence of this post--continue on same line with continuous measurement along the 253rd mile.

171.87 The cor. of secs. 33 and 34, T. 43 S., R. 22 E., Utah.
Set an iron post 30 ins. long and 2 1/2 ins. in diam., 24 ins. in the ground, with brass cap marked

T43S R22E
S33 S34

ARIZ
1953

Deposit broken glass at the base of the post.

211.87 The 1/4 sec. cor. of sec. 34, T. 43 S., R. 22 E., Utah
Set an iron post 30 ins. long and 2 1/2 ins. in diam., 24 ins. in the ground, with brass cap marked

1/4 S34

ARIZ
1953

Deposit broken glass at the base of the post.

240.12 Point for the 253rd mile post at proportionate distance. There is no remaining evidence of the original monument--continue on same line with continuous measurement along the 254th mile.

251.87 The cor. of secs. 34 and 35, T. 43 S., R. 22 E., Utah.
Set an iron post 30 ins. long and 2 1/2 ins. in diam., 24 ins. in the ground, with brass cap marked

DEPENDENT RESERVE OF PORTION OF THE
UTAH-ARIZONA STATE BOUNDARY LINE

Chains		Station
	<p>T438 R22E S34 S35 ARIZ 1953</p> <p>Deposit broken glass at the base of the post.</p> <p>From this point USGS Station "011" bears N. 70°56'30" W., 218.37 chs.</p>	40.00
255.90	Low spur N. 20° E.	
291.16	White sandstone outcropping.	
291.87	The 1/4 sec. cor. of sec. 35, T. 43 S., R. 22 E., Utah. Set an iron rod 12 ins. long and 5/8 ins. in diam., 8 ins. in a hole, drilled into solid surface rock, in the center of a cross (X) cut into rock; cut the figure "1/4" into the rock immediately N. of this point.	
307.70	Road, bears N. 30° E. and S 30° W.	
320.16	Point for the 254th mile post at proportionate distance. There is no remaining evidence of the original monument--continue on same line with continuous measurement along the 255th mile.	
331.87	The corner of secs. 35 and 36, T. 43 S., R. 22 E., Utah. Set an iron post 30 ins. long and 2 1/2 ins. in diam., 24 ins. in the ground, with brass cap marked	
	<p>T438 R22 E S35 S36 ARIZ 1953</p> <p>Deposit broken glass at the base of the post.</p>	
371.87	The 1/4 sec. cor. of sec. 36, T. 43 S., R. 22 E., Utah. Set an iron post 30 ins. long and 2 1/2 ins. in diam., 24 ins. in the ground, with brass cap marked	
	<p>1/4 S36 ARIZ 1953</p> <p>Deposit broken glass at the base of the post.</p>	
390.50	Road, bears NW. and SE.	
391.50	Road, bears N. 10° W. and S 10° E.	
392.40	Road, bears N. 15° E. and S. 15° W.	
400.20	The 255th mile post marked by an iron post conforming to the record. Land, rolling desert. Soil, gravelly to rocky clay loam. Timber, dwarf juniper. Undergrowth, shadscale, weeds, and grass.	
	N. 89°56' E. along the 256th mile.	

DEPENDENT RESURVEY OF PORTION OF THE
UTAH-ARIZONA STATE BOUNDARY LINE

Chains

Over rolling bench through widely scattered timber and a scant undergrowth.

11.67 The cor. of T. 43 S., Rs. 22 and 23 E., Utah; established at a point 1750.50 chs. westward in departure from the Four Corners monument.

Set an iron post 30 ins. long and 2½ ins. in diam., 28 ins. in the ground, with brass cap marked

T43S
R22E R23E
S36 | S31

ARIZ

1953

Deposit a sandstone rock, 4x3x2 ins., marked with a cross (X), at the base of the post, and raised a mound of stone, 2 ft. base and 1½ ft. high, to the N.

46.10 Draw, drains S.; also road bearing N. 30° W. and S. 30° E.

51.67 The ¼ sec. cor. of sec. 31, T. 43 S., R. 23 E., Utah.

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap marked

¼S31

ARIZ

1953

Deposit broken glass at the base of the post.

72.60 Road, bears N. 65° W. and S. 65° E.

79.91 Point for the 256th mile post at proportionate distance; there is no remaining evidence of the original monument--continue on same line with continuous measurement along the 257th mile.

91.67 The cor. of secs. 31 and 32, T. 43 S., R. 23 E., Utah.

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap marked

T43S R23E
S31 | S32

ARIZ

1953

Deposit broken glass at the base of the post.

103.50 Sandstone spur, projects S.

118.40 Draw, drains SW.

131.67 The ¼ sec. cor. of sec. 32, T. 43 S., R. 23 E., Utah.

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap marked

¼S32

ARIZ

1953

DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
STATE OF ARIZONA

Chains

3000

Deposit broken glass at the base of the post.

132.50 Road, bears N. 20° W. and SE.

143.60 Road, bears N. 15° W. and S 30° E.

159.85 Point for the 257th mile post at proportionate distance. There is no remaining evidence of the original monument--continue on same line with continuous measurement along the 258th mile.

171.67 The cor. of secs. SE and SW, T. 43 S., R. 23 E., Utah.

Set an iron post, 30 ins. long, 2 1/2 ins. in diam., 24 ins. in the ground, with brass cap marked

T438 R23E
S32 S33

ARIZ

1953

211.67 The 1/4 sec. cor. of sec. 33, T. 43 S., R. 23 E., Utah

Set an iron post, 30 ins. long, 2 1/2 ins. in diam., 24 ins. in the ground, with brass cap marked

1/4 S33

ARIZ

1953

Deposit broken glass at the base of the post.

239.74 Point for the 258th mile post at proportionate distance. There is no remaining evidence of the original monument--continue on same line with continuous measurement along the 259th mile.

242.20 Road, bears NE and SW.

251.67 The cor. of secs. 33 and 34, T. 43 S., R. 23 E., Utah.

Set an iron post, 30 ins. long, 2 1/2 ins. in diam., 26 ins. in the ground, with brass cap marked

T438 R23E
S33 S34

ARIZ

1953

Deposit broken glass at the base of the post.

275.80 Road, S. 60° E. and N. 60° W.

281.50 Road, bears S. 10° E. and N. 10° W.

285.00 Road, bears N. 70° W. and S. 70° E.

291.67 The 1/4 sec. cor. of sec. 34, T. 43 S., R. 23 E., Utah.

Set an iron post, 30 ins. long, 2 1/2 ins. in diam., 26 ins. in the ground, with brass cap marked

1/4 S34

ARIZ

1953

DEPENDENT RESURVEY OF PORTION OF THE
UTAH-ARIZONA STATE BOUNDARY LINE

Chains

Deposit broken glass at the base of the post.

310.00 Road, bears NW. and SE.

317.85 Small draw, drains S 30° E.

319.66 Point for the 259th mile post at proportionate distance. There is no remaining evidence of the original monument--continue on same line with continuous measurement along the 260th mile.

331.67 The cor. of secs. 34 and 35, T. 43 S., R. 23 E., Utah.

Set an iron rod, 12 ins. long and 5/8 in. in diam., 6 ins. in a hole, drilled into solid surface rock, in the center of a cross (X), cut into the rock. To the E. of the rod I cut two grooves and to the W. four grooves, and raise a mound of stone 3 ft. base and 2 ft. high, N. of the rod.

338.70 Draw, drains SW.

353.05 Road, bears N. and S. 15° E.

356.60 Road, bears N. and S.

362.90 Draw, drains SW.

367.50 Road, bears NE. and S. 60° W.

371.67 The 1/4 sec. cor. of sec. 35, T. 43 S., R. 23 E., Utah.

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap marked

1/4 S35

ARIZ

1953

Deposit broken glass at the base of the post.

376.80 Forks of road, bearing N. 30° E.; S. and SW.

377.40 Spur, projects S: 30° W.

381.46 Draw, drains S 25° W.

389.60 Spur, projects S. 20° W. about 20 chs. to end.

392.30 Draw, drains S. 25° W.

398.50 Spur, projects S. 30° W.

399.57 The 260th mile post, marked by a sandstone rock, 22x18x6 ins., set in the ground and marked "ARIZ" on the S. face; other marks not legible. Witnessed by a mound of stone E. of the post.

At the same point.

Set an iron post, 30 ins. long; 2 1/2 ins. in diam., 22 ins. in the ground, to solid rock and in a mound of stone, with brass cap marked

260M

UTAH

ARIZ

1953

DEPENDENT RESURVEY OF PORTION OF THE
UTAH-ARIZONA STATE BOUNDARY LINE

Chains

Deposit broken glass at the base of the post and bury the original stone to the S.

Land, rolling desert.
Soil, gravelly to rocky clay loam and exposed sandstone.
Timber, dwarf juniper
Undergrowth, shadscale, weeds, and grass.

N. 89°42' E. along the 261st mile.

Over broken land, through widely scattered timber and a scant undergrowth.

12.10 Point for the cor. of secs. 35 and 36 falls upon steeply sloping sandstone ledge, at the W. edge of Red Mesa, where the monument cannot be perpetuated.

15.10 W. rim of Red Mesa, bears NW. and S.

Set an iron rod, 12 ins. long, 5/8 in. in diam., 8 ins. in a hole, in solid sandstone, at the witness cor. of secs. 35 and 36, T. 43 S., R. 23 E., Utah, over which I set an iron post 30 ins. long and 2 1/2 ins. in diam., in a large mound of stone, with brass cap marked

WC
T43S R23E
S35 S36

ARIZ

1953

Thence across mesa top.

28.70 E. edge of Red Mesa, bears N. and S. 10° E.

31.90 Draw, descends NE. about 5 chs., thence E.

35.90 Draw, descends N. 60° E.

48.00 Spur, projects N. 60° E.

52.10 The 1/4 sec. cor. of sec. 36, T. 43 S., R. 23 E., Utah.

Set an iron post, 30 ins. long, 2 1/2 ins. in diam., 24 ins. in the ground, with brass cap marked

1936

ARIZ

1953

Deposit broken glass at the base of the post.

57.10 Draw, drains N. 60° E.

62.80 Draw, drains NE.

79.60 The 261st mile post, marked by a sandstone rack, 30x10x6 ins., firmly set, and marked, UTAH on the N., 37 NL on the E., ARIZ on the S., and 261M on the W. faces.

At the same point.

Set an iron post, 30 ins. long, 2 1/2 ins. in diam., 26 ins. in the ground, with brass cap marked

DEPENDENT RESURVEY OF PORTION OF THE
UTAH-ARIZONA STATE BOUNDARY LINE

Chains

262M

UTAH

ARIZ

1953

Bury the original stone alongside the iron post and raise a mound of stone to the W.

Land, broken bench.

Soil, gravelly and rocky clay loam.

Timber, dwarf juniper.

Undergrowth, shadscale, sagebrush, weeds, and grass.

East along the 262nd mile.

Over rolling land, through scant undergrowth.

5.80 Road, bears N. 30° W. and S. 30° E.

12.50 The cor. of T. 43, S., Rs. 23 and 24 E., Utah, established at a point 1270.50 chains westward in departure from the Four Corners monument.

Set an iron post, 30 ins. long, 2½ ins. in diam., 26 ins. in the ground, with brass cap marked

T43S

R23E R24E

S36 S31

ARIZ

1953

Raise a mound of stone N. of the post.

From this cor. USGS. station, Red Mesa, bears N. 71°19'30" W., 102.81 chs. distant. Latitude, 37°00'18.95" N.; Longitude, 109°21'13.20" W.

33.50 Road, bears N. 35° W. and S. 25° E.

45.70 Road, bears N. 20° E. and S. 20° W.

52.50 The ¼ sec. cor. of sec. 31, T. 43 S., R. 24 E., Utah.

Set an iron post, 30 ins. long, 2½ ins. in diam., 22 ins. in the ground and in a collar of stone, with brass cap marked

¼S31

ARIZ

1953

Deposit broken glass at the base of the post.

74.20 Wash, drains N. 10° E.

80.015 Point for the 262nd mile post at proportionate distance. There is no remaining evidence of the monument--continue on same line with continuous measurement.

92.00 Road, bears N. & S.

92.50 The cor. of secs. 31 and 32, T. 43 S., R. 24 E., Utah.

DEPENDENT AGENCIES OF THE
 UTAH-ARIZONA STATE BOUNDARY LINE

Chains

Set an iron post, 30 ins. long, 2 1/2 ins. in diam., 22 ins. in the ground and in a collar of stone, with brass cap marked

T43S	R24E
S31	S32

ARIZ

1953

Deposit broken glass at the base of the post.

108.40 Road NE. and SW.

132.50 The 1/4 sec. cor. of sec. 32, T. 43 S., R. 24 E., Utah.

Set an iron post, 30 ins. long, 2 1/2 ins. in diam., 22 ins. in the ground and in a collar of stone, with brass cap marked

T43S	R24E
S32	S33

ARIZ

1953

Deposit broken glass at the base of the post.

160.03 Point for the 263rd mile post at proportionate distance. There is no remaining evidence of the original monument--continue on the same line with continuous measurement.

172.50 The cor. of secs. 32 and 33, T. 43 S., R. 24 E., Utah.

Set an iron post, 30 ins. long, 2 1/2 ins. in diam., 22 ins. in the ground, with brass cap marked

T43S	R24E
S32	S33

ARIZ

1953

Deposit broken glass at the base of the post.

174.00 Low spur, projects N. 30° E.

180.80 Bladed road, bears NE. & SW.

183.40 Road, bears N. 30° E. and S. 30° W.

189.00 Road, bears N. 60° E. and S. 60° W.

212.50 The 1/4 sec. cor. of sec. 33, T. 43 S., R. 24 E., Utah.

Set an iron post, 30 ins. long, 2 1/2 ins. in diam., 22 ins. in the ground, with brass cap marked

T43S	R24E
S33	S34

ARIZ

1953

Deposit broken glass at the base of the post.

229.10 Road, bears N. and S.

240.05 Point for the 264th mile post at proportionate distance. There is no remaining evidence of the original monument--continue on same line with continuous measurement.

DEPENDENT RESURVEY OF PORTION OF THE
UTAH-ARIZONA STATE BOUNDARY LINE

Chains

252.50 The cor. of secs. 33 and 34, T. 43 S., R. 24 E., Utah.

Set an iron post, 30 ins. long, 2 1/2 ins. in diam., 22 ins. in the ground, with brass cap marked

T43S R24E
S33 S34

ARIZ

1953

Deposit broken glass at the base of the post.

280.30 Road, bears N. 30° W. and S. 30° E.

282.10 Unimproved road, bears N. 10° W. and S.

289.00 Draw, drains N. 30° E.

292.50 The 1/4 sec. cor. of sec. 34, T. 43 S., R. 24 E., Utah.

Set an iron post, 30 ins. long, 2 1/2 ins. in diam., 22 ins. in the ground, with brass cap marked

1/4 S34

ARIZ

1953

Deposit broken glass at the base of the post.

303.50 Unimproved road, bears N. 30° E. and S. 30° W.

310.00 Low spur, projects N. about 6 chs. to end.

313.40 Bladed road, bears N. & S.

317.80 Unimproved road, bears N. 30° W. and S 30° E.

320.06 The 265th mile post, marked by a sandstone rock, 28x14x6 ins., set in a mound of stone. Rock is weathered and no marks visible.

At the same point.

Set an iron pin, 12 ins. long, 5/8 in. in diam., 7 ins. in a hole, drilled into solid surface rock, in the center of a cross (x) cut into the rock. Raise a mound of stone to the south and cut the figures 265M to the N. of the rod.

Land, rolling and broken desert.
Soil, sandy to gravelly clay loam.
Timber, widely scattered juniper
Undergrowth, shadscale, sagebrush, weeds, and grass.

N. 89°57' E. along the 266th mile.

Over rolling land through widely scattered timber and scant undergrowth.

12.44 At the cor. of secs. 34 and 35, T. 43 S., R. 24 E., Utah

Set an iron rod, 12 ins. long, 5/8 in. in diam., 7 ins. in a hole, drilled into solid sandstone surface rock, in the center of a cross (X), cut into the rock, witnessed by a mound of stone to the N., and two grooves cut into the rock E. of the rod, and four grooves to the W.

DEPENDENT RESERVE OF PORTION OF THE
UTAH-ARIZONA STATE BOUNDARY LINE

Chains		marked															
52.44	At the $\frac{1}{4}$ sec. cor. of sec. 35, T. 43 S., R. 24 E., Utah. Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 22 ins. in the ground with brass cap marked	OR. 883															
	<table border="0"> <tr><td></td><td style="text-align: center;">T43S</td><td></td></tr> <tr><td></td><td style="text-align: center;">R24E</td><td></td></tr> <tr><td></td><td style="text-align: center;">S35</td><td style="text-align: center;">S36</td></tr> <tr><td></td><td colspan="2" style="text-align: center;">ARIZ</td></tr> <tr><td></td><td colspan="2" style="text-align: center;">1953</td></tr> </table>		T43S			R24E			S35	S36		ARIZ			1953		
	T43S																
	R24E																
	S35	S36															
	ARIZ																
	1953																
	Deposit broken glass at the base of the post.																
67.80	Unimproved road, bears NW. and SE.																
70.20	Unimproved road, bears N. and S.																
80.01	Point for the 266th mile post at proportionate distance. There is no remaining evidence of the original monument--continue on same line with continuous measurement.																
80.90	Unimproved road, bears N 30° W. and S 30° E.																
91.80	Unimproved road, bears N. 60° W. and S 60° E.																
92.44	At the cor. of secs. 35 and 36, T. 43 S., R. 24 E., Utah Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 22 ins. in the ground, with brass cap marked																
	<table border="0"> <tr><td></td><td style="text-align: center;">T43S</td><td style="text-align: center;">R24E</td></tr> <tr><td></td><td style="text-align: center;">S35</td><td style="text-align: center;">S36</td></tr> <tr><td></td><td colspan="2" style="text-align: center;">ARIZ</td></tr> <tr><td></td><td colspan="2" style="text-align: center;">1953</td></tr> </table>		T43S	R24E		S35	S36		ARIZ			1953					
	T43S	R24E															
	S35	S36															
	ARIZ																
	1953																
	Deposit broken glass at the base of the post.																
132.44	At the $\frac{1}{4}$ sec. cor. of sec. 36, T. 43 S., R. 24 E., Utah. Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 22 ins. in the ground, with brass cap marked																
	<table border="0"> <tr><td></td><td style="text-align: center;">T43S</td><td></td></tr> <tr><td></td><td style="text-align: center;">R24E</td><td></td></tr> <tr><td></td><td style="text-align: center;">S36</td><td></td></tr> <tr><td></td><td colspan="2" style="text-align: center;">ARIZ</td></tr> <tr><td></td><td colspan="2" style="text-align: center;">1953</td></tr> </table>		T43S			R24E			S36			ARIZ			1953		
	T43S																
	R24E																
	S36																
	ARIZ																
	1953																
	Deposit broken glass at the base of the post.																
160.02	Point for the 267th mile post at proportionate distance. There is no remaining evidence of the original monument--continue on the same line with continuous measurement.																
172.44	The cor. of T. 43 S., Rs. 24 and 25 E., Utah, established at a point 790.50 chs. westward in departure from the Four Corners monument. Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins. in the ground, with brass cap marked																
	<table border="0"> <tr><td></td><td style="text-align: center;">T43S</td><td></td></tr> <tr><td></td><td style="text-align: center;">R24E</td><td style="text-align: center;">R25E</td></tr> <tr><td></td><td style="text-align: center;">S36</td><td style="text-align: center;">S37</td></tr> <tr><td></td><td colspan="2" style="text-align: center;">ARIZ</td></tr> <tr><td></td><td colspan="2" style="text-align: center;">1953</td></tr> </table>		T43S			R24E	R25E		S36	S37		ARIZ			1953		
	T43S																
	R24E	R25E															
	S36	S37															
	ARIZ																
	1953																
	Deposit broken glass at the base of the post.																

DEPENDENT RESURVEY OF PORTION OF THE
UTAH-ARIZONA STATE BOUNDARY LINE

Chains

210.94

The $\frac{1}{4}$ sec. cor. of sec. 31, T. 43 S., R. 25 E., Utah.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 22 ins. in the ground and in a collar of petrified wood, with brass cap marked

$\frac{1}{4}$ S31

ARIZ

1953

Deposit broken glass at the base of the post.

240.03

Point for the 268th mile post at proportionate distance. There is no remaining evidence of the original monument--continue on same line with continuous measurement.

250.94

The cor. of secs. 31 and 32, T. 43 S., R. 25 E., Utah.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins. in the ground, with brass cap marked

T43S R25E
S31 | S32

ARIZ

1953

Deposit broken glass at the base of the post.

262.80

Small wash, drains N.

290.94

The $\frac{1}{4}$ sec. cor. of sec. 32, T. 43 S., R. 25 E., Utah

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins. in the ground, with brass cap marked

$\frac{1}{4}$ S32

ARIZ

1953

Deposit broken glass at the base of the post.

317.90

Unimproved road, bears NW. and SE.

320.04

Point for the 269th mile post at proportionate distance. There is no remaining evidence of the original monument--continue on same line with continuous measurement.

330.94

The cor. of secs. 32 and 33, T. 43 S., R. 25 E., Utah.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 26 ins. in the ground, with brass cap marked

T43S R25E
S32 | S33

ARIZ

1953

Deposit a sandstone rock, 5x5x2 ins., marked with a cross (X) and broken glass at the base of the post.

340.90

Small reservoir, bears N. about 1.70 chs.

DEPENDENT RESERVE OF PORTION OF THE
UTAH-ARIZONA STATE BOUNDARY LINE

Chains	Road, bears N. and S.	marked
362.00		marked
379.94	The $\frac{1}{4}$ sec. cor. of sec. 33, T. 43 S., R. 25 E., Utah Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 26 ins. in the ground, with brass cap marked	
	<u>$\frac{1}{4}$S33</u>	
	ARIZ	
	1953	
	Deposit a sandstone rock, 5x4x3 ins., marked with a cross (X) and broken glass at the base of the post.	
374.80	Draw, drains N. 70° W.	
386.90	Draw, Drains S 80° W.	
400.05	The 270th mile post, marked by a sandstone rock, 30x16x5 ins., firmly set in the ground and in a mound of stone; marked UTAH on the S., 37 NL. on the E., ARIZ on the S., and 270M on the W. faces.	
	At the same point.	
	Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 12 ins. in the ground, to solid rock and in a mound of stone, with brass cap marked	
	270M	
	<u>UTAH</u>	
	ARIZ	
	1953	
	Deposit broken glass at the base of the post and bury the original stone alongside.	
	Land, rolling desert, becoming rougher in the E.	
	Soil, gravelly clay loam.	
	Timber, widely scattered dwarf juniper.	
	Undergrowth, shadscale, sagebrush, weeds, and grass.	
	N. 89°58' E., along the 271st mile.	
	Over rolling and broken land, through widely-scattered timber and a scant undergrowth.	
10.50	Low ledge bearing N. and S. on the W. edge of mesa.	
10.89	The cor. of secs. 33 and 34, T. 43 S., R. 25 E., Utah	
	Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 10 ins. in the ground, to solid rock and in a mound of stone, with brass cap marked	
	T43S R25E	
	<u>S33 S34</u>	
	ARIZ	
	1953	
	Deposit broken glass and a sandstone rock 5x4x3 ins., marked with a cross (X), at the base of the post.	
11.00	Unimproved road, bears N. & S.	

DEPENDENT RESURVEY OF PORTION OF THE
UTAH-ARIZONA STATE BOUNDARY LINE

Chains

- 24.32 Unimproved road, bears NE. and SW.
- 42.90 East edge of mesa, bears NE. and SW.
- 80.89 The $\frac{1}{4}$ sec. cor. of sec. 34, T. 43 S., R. 25 E., Utah.
Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 10 ins. in the ground, to solid rock and in a mound of stone, with brass cap marked
 $\frac{1}{4}$ S34
ARIZ
1953
Deposit a sandstone rock, 4x3x2 ins., marked with a cross (X), at the base of the post.
- 62.30 Draw, drains SE.
- 69.30 Spur, projects SE. about 12 chs. to end.
- 74.00 Large draw, drains S. 70° E.
- 79.595 Point for the 271st mile post at proportionate distance. There is no remaining evidence of the original monument --continue on same line with continuous measurement, over broken land.
- 90.89 The cor. of secs. 34 and 35, T. 43 S., R. 25 E., Utah.
Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 22 ins. in the ground, and in a collar of stone, with brass cap marked
T43S R25E
S34 S35
ARIZ
1953
Deposit broken glass and a sandstone rock, 6x4x1 $\frac{1}{2}$ ins., marked with a cross (X), at the base of the post.
- 95.10 Large draw, drains N.
- 106.70 Spur, projects N.
- 110.00 Draw, drains N.
- 113.70 Spur, projects N. 30° E. about 20 chs. to end.
- 130.89 The $\frac{1}{4}$ sec. cor. of sec. 35, T. 43 S., R. 25 E., Utah.
Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 22 ins., in the ground, and in a collar of stone, with brass cap marked
 $\frac{1}{4}$ S35
ARIZ
1953
Deposit broken glass and a sandstone rod, 9x6x3 ins., marked with a cross (X), at the base of the post.
- 131.40 Small draw, drains N. 30° E.
- 139.80 Low spur, projects N. 30° W., about 6 chs. to end.

DEPARTMENT OF THE INTERIOR
UTAH-ARIZONA STATE BOUNDARY LINE

Chains

148.00

Draw, drains N. 30° W.

en1480
S2. AS
CP. SA

155.30

Spur, projects N. about 8 chs. to end.

159.19

The 272nd mile post, marked by a sandstone rock, 31x12x8 ins., firmly set in the ground, and marked UTAH on the N., 37 NL. on the E., ARIZ on the S., and 272N on the W. faces.

At the same point.

Set an iron post, 30 ins. long, 2 1/2 ins. in diam., 26 ins. in the ground, with brass cap marked

272M

UTAH

ARIZ

1953

Bury the original stone alongside the iron post and raise a mound of stone to the E.

Land, broken bench.

Soil, rocky clay loam.

Timber, dwarf juniper.

Undergrowth, shadscale, sagebrush, weeds, and grass.

N. 89°52' E., along the 273rd mile.

Over broken land, through widely scattered timber and scant undergrowth

7.30

Draw, drains N. 30° E.

10.30

Spur, projects N. 20° W.

11.70

The cor. of secs. 35 and 36, T. 43 S., R. 25 E., Utah

Set an iron post, 30 ins. long, 2 1/2 ins. in diam., 26 ins. in the ground, with brass cap marked

T43S R25E
S35 S36

ARIZ

1953

Deposit broken glass and a sandstone rock, 8x6x4 ins., marked with a cross (X), at the base of the post. Raise a mound of stone to the N.

13.90

Head of small draw draining NE.

19.40

Spur, projects N. about 3 chs. to end.

33.50

Small draw, drains N.

44.40

Small draw, drains NE.

51.70

The 1/4 sec. cor. of sec. 36, T. 43 S., R. 25 E., Utah.

Set an iron post, 30 ins. long, 2 1/2 ins. in diam., 26 ins. in the ground, with brass cap marked

T43S

ARIZ

1953

DEPENDENT RESURVEY OF PORTION OF THE
UTAH-ARIZONA STATE BOUNDARY LINE

Chains

- Deposit broken glass at the base of the post and raise a mound of stone to the N.
- 57.00 Small spur, projects N. 20° E., about 3 chs. to end.
- 59.00 Shallow draw, drains N. 20 ° E.
- 68.20 Spur, projects N. 30° E.
- 72.40 Unimproved road, bears N. and S.
- 73.20 Draw, drains N.
- 79.57 The 276rd mile post, marked by a sandstone rock, 31x12x5 ins., set in a mound of stone and marked 273M on W., UTAH on N., 37 NL. on E., and ARIZ on S., and from which
- A juniper 10 ins. in diam., marked ARIZ 273M BT., bears S. 28°50' W., 72 lks.
A juniper stump, bears N. 20°50' W., 38 lks. distant.
- At the same point, over a cross (X), cut into solid rock
- Set an iron post, 30 ins. long, 2½ ins. in diam., in a large mound of stone, with brass cap marked
- 273M

 UTAH
 ARIZ

 1953
- Bury the original stone alongside the post.
- Land, broken slopes.
Soil, gravelly to rocky clay loam.
Timber, dwarf juniper
Undergrowth, shadscale, cactus, weeds, and grass.
-
- S. 89°27' E., along the 274th mile.
- Over broken land, through widely scattered timber and a scant undergrowth.
- 1.30 Draw, drains SW.
- 12.13 The cor. of T. 43 S., Rs. 25 and 26 E., Utah, established at a point 312.00 chs. W., in departure from the Four Corners monument.
- Set an iron post, 30 ins. long, 2½ ins. in diam., 26 ins. in the ground, with brass cap marked
- T43S
 R25E R26E
 S36 S31
 ARIZ

 1953
- Deposit broken glass at the base of the post and raise a mound of stone to the N.
- 17.30 Ridge, bears N. 60° E. and S. 30° W.
- 35.30 Draw, drains SW.
- 52.13 The ¼ sec. cor. of sec. 31, T. 43 S., R. 26 E., Utah.

DEPENDENT RESERVE OF PORTION OF THE
UTAH-ARIZONA STATE BOUNDARY LINE

Chains	Set an iron post, 30 ins. long, 2 1/2 ins. in diam., 28 ins. in the ground, to solid rock and in a mound of stone, with brass cap marked	ARIZ
	1851	00.08
	ARIZ	00.08
	1953	08.08
	Deposit broken glass at the base of the post	00.07
79.69	Point for the 274th mile post at proportionate distance. (There is no remaining evidence of the original monument--continue on same line with continuous measurement along the 275th mile)	08.07
92.13	The cor. of secs. 31 and 32, T. 43 S., R. 26 E., Utah	
	Set an iron post, 30 ins. long, 2 1/2 ins. in diam., 28 ins. in the ground, with brass cap marked	
	T43S R26E 831 832	
	ARIZ	
	1953	
	Deposit broken glass at the base of the post.	
132.13	The 1/4 sec. cor. of sec. 32, T. 43 S., R. 26 E., Utah.	
	Set an iron post, 30 ins. long, 2 1/2 ins. in diam., 26 ins. in the ground, with brass cap marked	
	1/4 S32	
	ARIZ	
	1953	
	Raise a mound of stone N. of the post.	
148.00	Spur, projects NE. about 10 chs. to end.	
160.40	Head of draw draining NW.	
164.81	The witness 275th mile post, marked by a sandstone rock, 37x14x9 ins. set in a mound of stone and marked 275.088M on the W., UTAH on the N., 37 NL on the E., and ARIZ on the S.	
	At the same point.	
	Set an iron pin, 12 ins. long, 5/8 in. in diam., 8 ins. in a hole, drilled into solid surface rock, in the center of a cross (X), cut in the rock. Mark the rock to the N. of the rod 275 W. MP., and raise a mound of stone E. of the rod.	
	Land, broken bench. Soil, rocky clay loam. Timber, dwarf juniper. Undergrowth, shadscale, cactus, sagebrush, weeds, and grass.	
	S. 89°39' E. along the 276th mile.	
	Over broken land, through scattered timber and a scant undergrowth.	
7.32	The cor. of secs. 32 and 33, T. 43 S., R. 26 E., Utah.	
	Set an iron post, 30 ins. long, 2 1/2 ins. in diam., 18 ins. in the ground, to solid rock and in a mound of stone, with brass cap marked	

INDEPENDENT SURVEY OF PORTION OF THE
 UTAH-ARIZONA STATE BOUNDARY LINE

153

Chains

T43S R26E
 S32 S33

ARIZ

1953

Deposit broken glass at the base of the post.

11.90 Enter rolling mesa, edge bears N. and S.

47.32 The $\frac{1}{4}$ sec. cor. of sec. 33, T. 43 S., R. 26 E., Utah.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 26 ins. in the ground, with brass cap marked

$\frac{1}{4}$ S33

ARIZ

1953

Raise a mound of stone N. of the post.

61.90 Leave mesa, edge bears N. and S.; reenter broken land.

68.40 Draw, drains NE. heading SW about 6 chs.

74.35 Point for the 276th mile post at proportionate distance. There is no remaining evidence of the original monument--continue on same line with continuous measurement along the 267th mile.

87.32 The cor. of secs. 33 and 34, T. 43 S., R. 26 E., Utah.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 26 ins. in the ground, with brass cap marked

T43S R26E
 S33 S34

ARIZ

1953

Raise a mound of stone N. of the post.

104.60 Spur, projects N. 80° E.

120.40 Draw, drains NE

127.32 The $\frac{1}{4}$ sec. cor. of sec. 34, T. 43 S., R. 26 E., Utah.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 26 ins. in the ground, with brass cap marked

$\frac{1}{4}$ S34

ARIZ

1953

Raise a mound of stone N. of the post.

139.00 Spur, projects N. 30° E.

148.80 Draw, drains N. 20° E.

154.14 Point for the 277th mile post at proportionate distance. There is no remaining evidence of the post--continue on same line with continuous measurement.

DEPENDENT RESURVEY OF PORTION OF THE
UTAH-ARIZONA STATE BOUNDARY LINE

Chains

201210

159.32

The cor. common to the states of Utah, Colorado, New Mexico, and Arizona marked by a bronze tablet, set in a truncated, pyramidal, concrete form, conforming to the record.

Land, rough and broken bench
Soil, gravelly to rocky clay loam
Timber, dwarf juniper
Undergrowth, shadscale, cactus, weeds, and grass.

GENERAL DESCRIPTION

The land along the boundary, covered by this resurvey, is located entirely in the Navajo Indian Reservation. The land in the west consists of rolling sandhills; farther east, it passes over several high mesas; and in the east, crosses deep canyons and broken hills. The soil is poor, being mainly a sandy clay with considerable exposed sandstone bedrock. The country is very dry, only a few small seeps being noted. The timber consists of stunted juniper and pinon. These are of value for firewood and fence posts only. There is a scant cover of buckbrush with mountain rush, amole, cactus, weeds, and grass in lesser amounts. The only road of importance is the one along the south boundaries of Ranges 21 and 22 east and leading from Mexican Water to Shiprock. This road has been graded and is kept in fair shape. There are many Navajo Indians living in the area. The major portion of the land is presently under lease for oil prospecting.

The mean magnetic declination was found to be $14^{\circ} 15'$ E.

4-600
(Feb., 1950)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS

NAMES	CAPACITY
Lynn G. Edmonds	Principal Assistant
William N. Bryan	Principal Assistant
Parley G. Bagley	Chairman
William D. Bowes	Chairman
Albert G. Robert	Chairman
Henry J. Pedersen	Chairman
Kenneth R. Small	Flagman
Lee N. Marsh	Flagman
Thomas H. Taylor	Flagman
Gerald R. Worl	Cornerman
John G. Cardinal	Cornerman
John S. Morton	Cornerman
LeRoy N. McCulley	Axeman

CERTIFICATE OF CADASTRAL ENGINEER

I, Robert C. Yundt, Cartographer-Cadastral HEREBY CERTIFY upon honor that,

pursuance of special instructions bearing date of the 28th day of July, 1953,

I have ~~examined~~ independently resurveyed the Utah-Arizona State Boundary between the 243rd Mile Post and the "Four Corners" monument at the corner common to the states of Utah, Colorado, Arizona, and New Mexico, with the establishment of corners thereon to govern the subdivisational surveys in Utah.

of the Meridian, in the State of, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in the specific manner described in the foregoing field notes.

Salt Lake City, Utah

February 17, 1954

Robert C. Yundt
Robert C. Yundt
Cartographer-Cadastral

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT,

Washington, D. C., MAY 10 1954, 19

The foregoing field notes of the ~~survey of~~ dependent resurvey of the Utah-Arizona state boundary between Mile Post 243 and the "Four Corners" monument at the corner common to the states of Utah, Arizona, Colorado, and New Mexico with the establishment of corners thereon to govern surveys in Utah

executed by Robert C. Yundt, Cartographer-Cadastral

having been critically examined and found correct, are hereby approved.

Donald Clement
Assistant Chief, Division of Cadastral Engineering.

CERTIFICATE OF TRANSCRIPT

I CERTIFY that the foregoing transcript of the field notes of the above-described surveys in _____, is a true copy of the original field notes.

Chief, Division of Cadastral Engineering.