

Volume

#

R0570

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

DEPT. OF THE INTERIOR
BUREAU OF LAND MGMT

ORIGINAL

JUN 27 1961 00 0

FIELD NOTES

.....
OF THE SURVEY

.....
OF THE SOUTH BOUNDARY

.....
THE WEST BOUNDARY

.....
AND

.....
A PORTION OF

.....
THE SUBDIVISIONAL LINES

.....
OF

.....
TOWNSHIP 18 SOUTH, RANGE 15 EAST

.....
Of the SALT LAKE Meridian,

In the State of UTAH

EXECUTED BY

.....
Fred R. Chappell - Cadastral Surveyor

.....
Glen B. Hatch - Cadastral Surveyor

.....
Under the supervision of Craig P. Sylvester - Cadastral Surveyor

Under special instructions dated May 31 , 19 32., which provided
Supplemental special instructions dated May 12, 1954 and September 2, 1960,
for the surveys included under Group No. 246 , approved July 22, 1932
June 28, 1954
Sept. 6, 1960
and assignment instructions dated April 25 , 19 61.

Survey commenced May 19 , 19 61.

Survey completed June 20 , 19 61.

INDEX DIAGRAM

Township 18 SOUTH, Range 15 EAST

| | | | | | |
|-------|-------|-------|-------|------|-------|
| 11 6 | 5 | 4 | 18 3 | 20 2 | 19 1 |
| | | | | 20 | |
| 11 7 | 8 | 9 | 17 10 | 11 | 12 |
| | | 23 | | | |
| 10 18 | 17 | 22 16 | 16 15 | 14 | 13 |
| | | 21 | | | |
| 9 19 | 20 | 21 | 16 22 | 23 | 24 |
| | | | | | |
| 8 30 | 29 | 28 | 15 27 | 26 | 25 |
| | | | | | |
| 7 31 | 25 25 | 24 28 | 14 34 | 35 | 12 36 |
| 6 | 5 | 4 | 3 | 2 | 1 |

SPG 886116

Lines surveyed by Glen B. Hatch _____

Lines surveyed by Fred R. Chappell _____

Chains

The east boundary was surveyed by Ralph Gentry in 1915. The north boundary was surveyed concurrently by Glen B. Hatch.

The following field notes are those of the south boundary, the west boundary and a portion of the subdivisional lines of Township 18 South, Range 15 East, deemed sufficient in extent to facilitate development of the natural resources and mark the boundaries of those sections that normally are considered state school sections.

The survey was executed with W. & L. E. Gurley Solar Transits Nos. 580158 and 541327 constructed in accordance with the standard instrumental specifications of the Bureau of Land Management. The instruments were in good condition prior to the beginning of the survey and was maintained in proper adjustment throughout the progress of this survey.

Corners on east-west lines were set on the true latitudinal curve. Lines connecting previously established corners were run by random and true method, but for simplification of the record the random lines are omitted from the field notes. In accordance with the intent of the special instructions, all subdivisional corners established are calculated to be at the position they would occupy if the entire township were subdivided.

Measurements herein contained were made with a narrow steel tape, 8 chains in length, graduated every link for the first 100 links and thereafter at intervals of 10 links. The tape was tested by comparison with a one chain standard steel tape and found to be correct. Measurements were made on the slope with the vertical angle of each interval ascertained by a clinometer in good adjustment; horizontal equivalents alone are entered in the field notes. All lines of this survey were run by direct method where the lines were accessible; lines inaccessible were run by traverse or triangulation methods. Distances to topography on lines run by traverse or triangulation are approximately as scaled from U. S. G. S. topographic sheets. The details of such traverses or triangulations have been thoroughly checked and verified, and in order to simplify the record the diagrams and reductions are omitted from these field notes.

The directions of the lines of this survey were determined by reference to true meridians established on line by altitude observations on the sun. The lines were carried forward by sustained triangulation being supplemented by other numerous altitude observations on the sun taken throughout the progress of the survey.

The geographic position for the southeast corner of the township is at latitude $39^{\circ} 12' 32.27''$ N. and longitude $110^{\circ} 11' 14.58''$ W. as adjusted from traverses to U. S. G. S. triangulation station, "Smith", located in section 7.

The magnetic declination was read at a number of stations throughout the township and the average of these readings was found to be 16° east.

Survey of the South Boundary of Township 18 South, Range 15 East

Beginning at the cor. of Tps. 18 S., Rs. 15 and 16 E., monumented with a 3 in. iron post, set, mkd. and witnessed as described in the official record.

West, along the S. bdy. of sec. 36.

Over mountainous, broken land.

Chains

Asc. 30 ft. over SE. slope.

- 1.70 Small spur, projects N. 15° E.; asc. 50 ft. along broken N. slope.
- 10.70 Top of ascent slopes N.; desc. 85 ft. over broken NW. slope.
- 15.00 Wash, 30 lks. wide; 4 ft. deep, drains N.; asc. 390 ft. over steep, broken NE. slope.
- 25.40 Spur, projects N.; desc. 170 ft. along steep, broken N. slope.
- 40.00 Wash, 60 lks. wide, 15 ft. deep, drains N.
Point for the ¼ sec. cor. of sec. 36, cannot be perpetuated.
- 40.60 Point selected for the witness ¼ sec. cor. of sec. 36.

Set an iron post, 30 ins. long, 2½ ins. in diam., 4 ins. in the grou and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T18S R15E
 ¼ S36
 T19S
 1961

Continue descent along broken N. slope.

- 48.60 Slope changes. Desc. 300 ft. over steep, broken NW. slope.
- 59.40 Wash, 20 lks. wide, 2 ft. deep, in bottom of canyon, drains N. 45° E thence asc. 15 ft. over gentle NE. slope.
- 67.80 Wash, 60 lks. wide, 4 ft. deep, drains N. 80° E., thence by triangulation, asc. abruptly about 300 ft. over broken, ledgy SE. slope.
- 80.00 Point for the cor. of secs. 35 and 36 falls on inaccessible ledges, and cannot be perpetuated.

Land, broken.
 Soil, sandy clay.
 Timber, none.

West, along the S. bdy. of sec. 35.

Over broken mountainous land.

Continue on same triangulation; asc. about 200 ft. over abrupt, ledgy SE. slope.

- 10.28 Top of ledge, 100 ft. high, bears NE. and SW., end triangulation.
- 10.30 Point selected for the witness cor. of secs. 35 and 36.

Set an iron post, 30 ins. long, 2½ ins. in diam., on solid sandstone, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T18S R15E
 S35|S36 W
 C
 T19S
 1961

of sec. 8 S., R. 15 E.

Chains

Asc. 70 ft. along top of spur, projects irregularly E.

28.26 By triangulation, desc. about 100 ft. over steep NW. slope.
Topography approximated.

35.00 Approximate dist. to draw, drains N.; asc. about 230 ft. over steep,
broken NE. slope.

40.00 Point for the $\frac{1}{4}$ sec. cor. of sec. 35.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 8 ins. in the
ground, and in a mound of stone, 3 ft. base to top, with brass cap
mkd.

T18S R15E

$\frac{1}{4}$ S35

T19S

1961

End triangulation. Continue ascent over broken NE. slope.

46.50 Spur, projects N.; desc. 50 ft. along rocky N. slope.

56.40 Spur, projects N. 40° E.; desc. 120 ft. over rocky NW. slope.

65.20 Wash, 20 lks. wide, 1 ft. deep, drains N. 20° W.; asc. 20 ft. over
NE. slope.

67.20 Small spur, projects N.; desc. 50 ft. over W. slope.

68.80 Wash, 20 lks. wide, 1 ft. deep, drains N.; asc. 30 ft. over E. slope.

72.10 Small spur, projects N.; desc. 10 ft. over W. slope.

74.40 Wash, 15 lks. wide, 2 ft. deep, drains N.; asc. 10 ft. over E. slope.

76.50 Spur, projects N.; desc. 50 ft. over NW. slope.

80.00 Point for the cor. of secs. 34 and 35.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 12 ins. in the
ground, and in a mound of stone, 3 ft. base to top, with brass cap
mkd.

T18S R15E

S34 | S35

T19S

1961

Land, broken.
Soil, rocky, sandy clay.
Undergrowth, shadscale.
Timber, none.

West, along the S. bdy. of sec. 34.

Over broken, mountainous land covered with shadscale.


By triangulation, desc. about 50 ft. along gentle N. slope.
Topography approximated.

Chains

- 9.00 Approximate dist. to E. rim of canyon, bears irregularly NE. and S.; desc. about 600 ft. over abrupt, broken ledges on E. slope.
- 25.00 Approximate dist. to bottom of canyon, drains NE.; asc. about 400 ft. over abrupt, broken SE. slope.
- 40.00 Point for the 1/4 sec. cor. of sec. 34 falls on vertical ledge and cannot be perpetuated.
- 40.10 End triangulation. Point selected for the witness 1/4 sec. cor. of sec. 34.

On the NE. point of ledge, 50 ft. high, bears NW. and SE., 130 ft. below W. rim of canyon.


Set an iron post, 30 ins. long, 2 1/2 ins. in diam., on solid sandstone, and in a mound of stone, 4 ft. base, 4 ins. from brass cap mkd.



Asc. abruptly 130 ft. over ledges on steep E. slope.

- 43.00 West rim of canyon, bears irregularly NE. and S.; asc. 30 ft. over gentle E. slope.
- 48.20 Top of ascent, bears NW. and SE., thence by triangulation, desc. about 30 ft. over gentle SE. slope. Topography approximated.
- 57.00 Approximate dist. to wash, 40 lks. wide, drains SE.; asc. about 600 ft. over steep, broken E. slope.
- 79.60 Rim of mesa, ledge 30 ft. high, bears N. and S., enter scattered timber.
- 80.00 Point for the cor. of secs. 33 and 34.

Set an iron post, 30 ins. long, 2 1/2 ins. in diam., 4 ins. in the ground, and in a mound of stone, 4 ft. base to top, with brass cap mkd.



Land, mountainous, broken.
Soil, rocky, sandy clay.
Timber, none.
Undergrowth, shadscale.

West, along the S. bdy. of sec. 33.

Over broken, mountainous land, through scattered timber.

Asc. 5 ft. over gentle E. slope.

- 2.70 Top of ascent, bears N. and S.; desc. 5 ft. over gentle W. slope.

Chains

16.60 Top of ledge, 40 ft. high, bears NW. and SE., thence by triangulation desc. abruptly about 200 ft. over broken SW. slope. Topography approximated.

15.00 Approximate dist. to draw, drains S.; asc. about 200 ft. over broken SE. slope.

24.50 Rim, ledge, bears NE. and SW. End triangulation, asc. 170 ft. over rolling land. Enter dense timber.

40.00 Point for the $\frac{1}{4}$ sec. cor. of sec. 33.

On a gentle E. slope.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 6 ins. in the ground, and in a mound of stone, 4 ft. base, 6 ins. from brass cap mkd.

T18S R15E

$\frac{1}{4}$ S33

T19S

1961

Continue ascent over rolling E. slope.

65.00 Spur, projects N.; desc. 70 ft. over broken W. slope.

71.30 Ledge, 30 ft. high, bears SW. and N.; desc. abruptly 250 ft. over rocky, broken NW. slope.

79.00 Draw, drains NW., thence along N. slope.

80.00 Point for the cor. of secs. 32 and 33, falls on small ledge sloping N. and cannot be perpetuated.

From this point, the witness cor. of secs. 32 and 33, bears N. $0^{\circ} 03'$ W., 0.05 chs. dist., and is monumented with an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., set 12 ins. in the ground and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T18S R15E

S32 | S33

W C

T19S

1961

Cor. set at base of small ledge on rocky N. slope.

Land, mountainous, broken.

Soil, rocky clay.

Timber, scattered to dense pinon and juniper.

West, along the S. bdy. of sec. 32.

Over mountainous land through dense timber.

By triangulation, asc. about 400 ft. over broken SE. slope. Topography approximated.

32.00 Approximate dist. to point of rocky spur, projects SE., about 200 ft. over broken SE. slope.

40.00 Point for the $\frac{1}{4}$ sec. cor. of sec. 32.

Chains

Set an iron post, 30 ins. long, 2½ ins. in diam., on solid sandstone and in a mound of stone, 4 ft. base, 6 ins. from brass cap mkd.

T18S R15E

¼ S32

T19S

1961

End triangulation, asc. 65 ft. over gentle SE. slope.

64.30 Ridge, bears N. and S.; desc. 330 ft. over broken sandstone ledges on steep, SW. slope.

80.00 Point for the cor. of secs. 31 and 32.

Set an iron post, 30 ins. long, 2½ ins. in diam., 12 ins. in the ground and in a mound of stone, 4 ft. base, 4 ins. from brass cap mkd.

T18S R15E

S31|S32

T19S

1961

Land, broken, mountainous.

Soil, sandy loam, rocky.

Timber, medium dense pinon and juniper.

West, along the S. bdy. of sec. 31.

Over broken land through medium timber.

Desc. 80 ft. over ledgy W. slope.

4.80 Draw, drains N. about 2.00 chs., thence NE., asc. 70 ft. over ledgy E. slope.

9.50 Spur, projects N.; desc. 50 ft. over ledgy NW. slope.

15.40 Draw, drains NE.; asc. 230 ft. over broken, ledgy SE. slope to ¼ cor. of sec. 31.

40.00 Point for the ¼ sec. cor. of sec. 31.

Set an iron post, 30 ins. long, 2½ ins. in diam., 6 ins. in the ground, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T18S R15E

¼ S31

T19S

1961

By triangulation, asc. about 200 ft. over rocky, broken SE. slope.

59.60 Top of ascent, slopes S., end triangulation. Desc. 60 ft. over steep W. slope to rim.

61.50 Rim of Book Cliffs, ledge, about 200 ft. high, bears N. and S., thence by triangulation, desc. abruptly about 800 ft. over ledges, 50 to 200 ft. high.

78.31 Intersect the W. bdy. of the Tp.

the S. E. of T. 18 S., R. 15 E.

Chains

Point for the SW. cor. of T. 18 S., R. 15 E.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 15 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T18S
R14E R15E
S36 | $\frac{S31}{S 1}$
T19S
R14E

Cor. set on steep, broken W. slope about 2.00 chs. below ledge.

From this cor. the $\frac{1}{4}$ sec. cor. of sec. 36, T. 18 S., R. 14 E., bears North, 14.45 chs., monumented with a $2\frac{1}{2}$ in. iron post, hereinafter described.

Land, broken, mountainous.

Soil, rocky clay.

Timber, E. $\frac{1}{2}$, medium juniper and pinon, W. $\frac{1}{2}$ scattered pinon and juniper.

Survey of the West Boundary of Township 18 South, Range 15 East, With Establishment Thereon of Corners Pertaining to Section 36, Township 18 South, Range 14 East, 40.00 chs. and 30.00 chs. North of the True Point for the Southeast Corner of Township 18 South, Range 14 East

From the SW. cor. of T. 18 S., R. 15 E.

North, along the W. bdy. of sec. 31.

Over rolling, rocky desert land through scattered shadscale brush.

Desc. 60 ft. over N. slope.

3.50 Wash, 10 lks. wide, 3 ft. deep, drains W.; asc. 40 ft. over SW. slope.

7.90 Spur, projects W.; desc. 40 ft. along rocky W. slope.

13.40 Spur, projects W. about 2.00 chs., thence NW., desc. 45 ft. over steep N. slope.

14.45 Point for the E. $\frac{1}{4}$ sec. cor. of sec. 36, T. 18 S., R. 14 E.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 4 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T18S
R14E | R15E
 $\frac{1}{4}$ S36 |
1961

17.70 Wash, drains NW.; desc. 65 ft. over gentle NW. slope.

21.90 Wash, 30 lks. wide, 10 ft. deep, drains W.; asc. 20 ft. over gentle S. slope.

29.50 Top of ascent, slopes W.; desc. 135 ft. over steep NE. slope.

curve of the W. Bd. o T. 8 .

Chains

- 33.00 Wash, 1.00 ch. wide, 20 ft. deep, drains NW.; asc. 30 ft. along W. slope.
- 36.80 Small clay spur, projects W. 50 lks. to wash, drains NW.; desc. 35 ft. over N. slope.
- 40.00 Point for the $\frac{1}{4}$ sec. cor. of sec. 31.
Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.
- T18S
R14E R15E
 $\frac{1}{4}$
| S31
1961
- 40.15 Wash, 10 lks. wide, 2 ft. deep, drains SW. 50 lks. to wash drains NW. asc. 140 ft. over series of small clay spurs on SW. slope.
- 51.70 Top of ascent slopes NW.; desc. 10 ft. over gentle NE. slope.
- 53.50 Wash, 10 lks. wide, 2 ft. deep, drains NW.; asc. 20 ft. over S. slope.
- 54.45 Point for the cor. of secs. 25 and 36, T. 18 S., R. 14 E.
Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins. in the ground to bedrock, and in a mound of stone, $3\frac{1}{2}$ ft. base to top, with brass cap mkd.
- T18S
R14E R15E
S25 |
S36 |
1961
- Asc. 10 ft. over S. slope.
- 56.90 Spur, projects W.; desc. 140 ft. over rocky NW. slope.
- 61.20 Wash, 10 lks. wide, 5 ft. deep, drains W., continue descent.
- 64.40 Wash, 10 lks. wide, 3 ft. deep, drains W., continue descent.
- 80.00 Point for the cor. of secs. 30 and 31.
Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins. in the ground, and in a mound of stone, 2 ft. base to top, with brass cap mkd.
- T18S
R14E R15E
S25 | S30
| S31
1961
- Land, rocky, rolling desert.
Soil, rocky loam and clay.
Timber, none.
Undergrowth, scattered shadscale.

North along the W. bdy. of sec. 30.

W. Bdv. of T. 18 S.. R. 15 E.

Chains

Over rolling, rocky desert land, through scattered shadscale brush.

Desc. 10 ft. over NW, slope.

- 1.00 Wash, 10 lks. wide, 2 ft. deep, drains irregularly W.; asc. 50 ft. over SW. slope.
- 5.40 Small spur, projects W.; desc. 185 ft. over rolling NW. slope.
- 9.30 Wash, 20 lks. wide, 1 ft. deep, drains NW., continue descent.
- 19.70 Wash, 30 lks. wide, 10 ft. deep, drains NW., continue descent.
- 31.50 Wash, drains N. about 1.00 ch., thence NW.; asc. 20 ft. over SW. slope.
- 40.00 Point for the $\frac{1}{4}$ sec. cor. of sec. 30.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground, and in a collar of stone to top, with brass cap mkd.

T18S
R14E R15E
 $\frac{1}{4}$
S30
1961

Desc. 100 ft. over rocky, rolling NW. slope.

- 73.30 Wash, 10 lks. wide, 2 ft. deep, drains NW.
- 76.30 Road, unimproved, bears irregularly N. and S.
- 80.00 Point for the cor.-of secs. 19 and 30.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins. in the ground, and in a mound of stone, $3\frac{1}{2}$ ft. base to top, with brass cap mkd.

T18S
R14E R15E
S19
S30
1961

Land, rocky rolling desert.
Soil, rocky clay and loam.
Timber, none.
Undergrowth, scattered shadscale.

North, along the W. bdy. of sec. 19.

Over rolling desert land through scattered shadscale brush.

Desc. 85 ft. over rolling NW. slope.

- 34.40 Wash, 30 lks. wide, 3 ft. deep, drains NW.; asc. 30 ft. over rolling SW. slope.
- 40.00 Point for the $\frac{1}{4}$ sec. cor. of sec. 19.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, and in a collar of stone, to top, with brass cap mkd.

Survey of the W. Bd. of T. 18 S. R. 1 E.

Chains

T18S
R14E R15E
¼
S19
1961

Desc. 30 ft. over gentle NW. slope.

- 78.50 Price River, 40 lks. wide, 3 ft. deep, with stream of water, 10 lks. wide, 3 ins. deep, flows SE., thence across river bottom.
- 80.00 Point for the cor. of secs. 18 and 19 falls in river bottom subject to overflow, where cor. cannot be perpetuated.

Land, rolling desert.
Soil, rocky loamy clay.
Timber, cottonwood trees along river, undergrowth, shadscale, willows and tamerack along river.

North, along the W. bdy. of sec. 18.

Over rolling desert land, through scattered shadscale brush.

Asc. 20 ft. over gentle SW. slope.

- 3.20 Point selected for the witness cor. of secs. 18 and 19.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T18S
R14E R15E
S13 | S18
 | S19
 ↓
 W C
 1961

Raise a mound of stone, 3 ft. base, 1½ ft. high, W. of cor.

Thence by triangulation, asc. about 150 ft. over SW. slope.

- 40.00 Point for the ¼ sec. cor. of sec. 18 falls on large sandstone boulder where cor. cannot be perpetuated.

- 40.20 Point selected for the witness ¼ sec. cor. of sec. 18. End triangulation.

Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T18S
R14E R15E
¼
S18
W C
1961

Asc. about 150 ft. over broken SW. slope by triangulation.

- 62.50 Spur, projects SW., end triangulation, desc. 65 ft. over rocky NW. slope.

- 75.50 Wash, drains SW.; asc. 60 ft. over broken SW. slope.

of the W. bdy. of T. 18 S. R. 15 E.

Chains

80.00

Point for the cor. of secs. 7 and 18.

Set an iron post, 30 ins. long, 2½ ins. diam., 14 ins. in the ground, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T18S

R14E R15E

S 7

S18

1961

Land, rolling and broken.

Soil, rocky loamy clay.

Timber, none.

Undergrowth, shadscale.

North, along the W. bdy. of sec. 7.

Over broken, mountainous land.

By triangulation, asc. about 120 ft. over rocky SW. slope.

8.30

Wash, drains SW., continue ascent.

13.80

Base of the Book Cliffs, bears NW. and SE., asc. abruptly about 820 ft. over precipitous SW. changing to S. slope.

37.20

Top of ledge, about 200 ft. high, bears irregularly E. and curves Nw. End triangulation, thence across top of spur, projects W.

40.00

Point for the ¼ sec. cor. of sec. 7.

Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T18S

R14E R15E

¼

S 7

1961

From this cor., U. S. G. S. triangulation station "Smith", bears N. 22° 59' E., 31.28 chs. dist. Latitude 39° 16' 46.298" N. and Longitude 110° 17' 45.278" W.

42.70

Top of same ledge, about 400 ft. high, bears E. and curves SW., thence by triangulation, desc. abruptly about 800 ft. over precipitous and ledgy N. slope.

54.50

Approximate dist. to ravine, drains irregularly NW.; asc. abruptly about 800 ft. over broken, ledgy SW. slope.

80.00

Point for the cor. of secs. 6 and 7 falls on inaccessible ledges on precipitous SW. slope and is not monumented.

Land, broken, mountainous face of Book Cliffs.

Soil, rocky clay with considerable exposed sandstone.

Timber, scattered scrub pinon and juniper on top of Book Cliffs.

North, along the W. bdy. of sec. 6.

Survey of the W. Bdv. of T. 18 S. R. 15 E.

Chains

Continuing on same triangulation, asc. about 350 ft. over broken Sw. slope.

13.80= Top of Book Cliffs, ledge about 200 ft. high, bears irregularly N. and S. End triangulation, enter scattered timber, asc. 60 ft. over rocky S. slope.

25.70 Spur, projects E.; desc. 70 ft. over rocky N. slope.

32.00 Small wash, drains E.; asc. 20 ft. over S. slope.

40.00 Point for the 1/4 sec. cor. of sec. 6.

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 6 ins. in the ground, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T18S
R14E R15E
1/4
S 6
1961

Asc. 20 ft. over S. slope.

46.30 Small rocky spur, projects E.; desc. 30 ft. over N. slope.

49.50 Wash, drains E.; asc. 35 ft. over SE. slope.

57.43 The cor. of Tps. 17 and 18 S., R. 14 E., monumented with a 3 in. iron post, set, mkd. and witnessed as described in the official record. From this pt. the closing cor. of secs. 6 & 31, bears N. 21.42 chs. & is monumented with a 2 1/2 in. iron post, set, mkd. & witnessed as described in the 1961 field notes of the S. bdy. of T. 17 S. R. 15 E. Land, broken, ledgy S. portion, rolling mesa top N. portion. Soil, rocky, with considerable exposed sandstone. Timber, scattered scrub pinon and juniper on mesa top.

Survey of the Subdivision of Township 18 South, Range 15 East

From the true point of secs. 35 and 36, from which its witness cor. bears W. 10.30 chs., hereinbefore described.

N. 0° 01' W., bet. secs. 35 and 36.

Over broken land covered with shadscale.

By traverse, asc. abruptly about 200 ft. over vertical ledges on SE. slope. Topography approximated.

5.00 Approximate dist. to spur, projects NE. about 20.00 chs., desc. about 800 ft. over abrupt, ledgy NW. slope.

20.00 Approximate dist. to bottom of descent, bears NE. and SW., thence along Price River bottom.

34.03 End traverse, thence N. 0° 01' W. on true line.

36.00 Right bank of Price River; bears NE. and SW.

38.40 Price River, with stream of water, 30 lks. wide, 6 ins. deep, course, NE. about 4.00 chs., thence SE.

of the Subdivision of T. 18 N. R. 15 E.

Chains

39.40 Left bank of Price River, bears NE. and SW.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 35 and 36.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 20 ins. in the ground, with brass cap mkd.

T18S R15E

$\frac{1}{4}$

S35|S36

1961

No accessories available.

By triangulation, asc. about 50 ft. over SE. slope. Topography approximated.

45.00 Approximate dist. to base of ledges, bears NE. and SW.; asc. abruptly about 500 ft. over sandstone ledges on SE. slope.

54.30 N. rim of Price River Canyon, bears SW. and E.; asc. 70 ft. over S. slope.

57.70 Spur, projects W., about 20.00 chs., thence by triangulation, desc. about 600 ft. over broken sandstone ledges on NW. slope.

58.00 Approximate dist. to S. rim of Price River Canyon, bears E. and W., continue descent.

68.00 Approximate dist. to base of ledges, bears NE. and SW., thence over nearly level land.

77.46 End triangulation.

80.00 Point for the cor. of secs. 25, 26, 35 and 36.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins. in the ground and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T18S R15E

S26|S25

S35|S36

1961

Cor. set about 3.00 chs. E. of Price River, course SW. from NW.

Land, broken.

Soil, sandy clay.

Timber, cottonwood and tamerack in river bottom.

From the cor. of secs. 25, 36, 30 and 31 on the E. bdy. of the Tp., monumented with an iron post, 3 ins. diam., set, mkd. and witnessed as described in the official record.

N. $89^{\circ} 54'$ W., bet. secs. 25 and 36.

Over mountainous, broken land covered with shadscale.

By triangulation, desc. about 600 ft. over steep, ledgy W. slope. Topography approximated.

t e u d i o

Chains

- 12.00 Approximate dist. to draw, drains SW.; asc. about 200 ft. over broken rocky NE. slope.
- 16.00 Approximate dist. to rocky point of spur, projects SE., continue ascent.
- 28.00 Approximate dist. to spur, projects S.; desc. about 100 ft. over W. slope.
- 37.00 Approximate dist. to draw, 40 lks. wide, 3 ft. deep, drains S.; asc. about 500 ft. over broken, ledgy E. slope.
- 39.98 Point for the $\frac{1}{4}$ sec. cor. of secs. 25 and 36.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins. in the ground, and in a collar of stone, with brass cap mkd.

T18S R15E

$\frac{1}{4}$ S25

S36

1961

End triangulation. Continue ascent over broken, ledgy E. slope.

- 46.00 Top of ledge, 100 ft. high, bears N. and S.
- 53.00 Ridge, bears NE. and SW., thence by triangulation, desc. about 700 ft. over broken NW. slope. Topography approximated.
- 77.50 Approximate dist. to ledge, 100 ft. high, bears NW. and SW.
- 79.96 The cor. of secs. 25, 26, 35 and 36.

Land, mountainous, broken.

Soil, rocky clay.

Timber, none.

Undergrowth, shadscale;

From the cor. of secs. 33 and 34, on the S. bdy. of the Tp., hereinbefore described.

N. $0^{\circ} 02'$ W., bet. secs. 33 and 34.

Over rolling mountainous land through scattered timber.

- 40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 33 and 34.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins. in the ground, and in a mound of stone, $3\frac{1}{2}$ ft. base to top, with brass cap mkd.

T18S R15E

$\frac{1}{4}$

S33|S34

1961

Continue over rolling land.

- 48.50 Desc. 150 ft. over broken ledges on NW. slope.
- 56.30 Small draw, drains NW.; asc. 30 ft. over SW. slope.

Chains

65.00 Top of ascent, slopes NW.; desc. 270 ft. over steep, ledgy NW. slope.

80.00 Point for the cor. of secs. 27, 28, 33 and 34.

Set an iron post, 30 ins. long, 2½ ins. diam., 4 ins. in the ground, and in a mound of stone, 4½ ft. base to top, with brass cap mkd.

T18S R15E

S28|S27

S33|S34

1961

Cor. set on spur, projects NE.

Land, mountainous.

Soil, rocky sandy clay.

Timber, scattered pinon and juniper.

N. 0° 02' W., bet. secs. 27 and 28.

Over broken land through scattered timber.

Desc. 360 ft. over broken N. slope.

30.50 Point selected for the witness ¼ sec. cor. of secs. 27 and 28.

On the S. rim of the Price River.

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.

T18S R15E

¼

S28|S27

W C

1961

Thence by triangulation, desc. abruptly about 700 ft. over broken, ledgy NW. slope. Topography approximated.

38.00 Wash, drains E.

40.00 Point for the ¼ sec. cor. of secs. 27 and 28, falls on inaccessible ledges, and cannot be perpetuated.

70.00 Approximate dist. to Price River, 1.00 ch. wide, 6 ins. deep, course E.; asc. abruptly about 700 ft. over near vertical ledges on S. slope.

73.10 N. rim of Price River, bears E. and W.; end triangulation. Desc. 35 ft. over rocky NE. slope.

80.00 Point for the cor. of secs. 21, 22, 27 and 28.

Set an iron post, 30 ins. long, 2½ ins. diam., 4 ins. in the ground, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T18S R15E

S21|S22

S28|S27

1961

Chains

Land, broken.
Soil, rocky clay.
Timber, scattered pinon and juniper.

N. 0° 02' W., bet. secs. 21 and 22.

Over broken land through scattered timber.

Desc. 40 ft. over N. slope.

- 7.00 Draw, drains SE.; asc. 70 ft. over SW. slope.
11.30 Spur, projects SE.; desc. 50 ft. over NE. slope.
18.50 Draw, drains E.; asc. 90 ft. over SE. slope.
36.70 Spur, projects E.; desc. 80 ft. over NE. slope.
40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 21 and 22.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 4 ins. in the ground, and in a mound of stone, $3\frac{1}{2}$ ft. base to top, with brass cap mkd.

T18S R15E

$\frac{1}{4}$

S21|S22

1961

Continue descent.

- 46.00 Wash, 60 lks. wide, drains SE.; asc. 360 ft. over broken SW. slope.
61.10 Spur, projects SE., thence by triangulation, desc. about 500 ft. over broken NE. slope. Topography approximated.
72.00 Approximate dist. to draw, drains NE.; asc. about 160 ft. along broken E. slope.
80.00 Point for the cor. of secs. 15, 16, 21 and 22.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins. in the ground, and in a mound of stone, $3\frac{1}{2}$ ft. base to top, with brass cap mkd.

T18S R15E

S16|S15

S21|S22

1961

Land, mountainous, broken.
Soil, rocky clay, exposed sandstone.
Timber, scattered pinon and juniper.

N. 0° 02' W., bet. secs. 15 and 16.

Over broken land through scattered timber.

Desc. 120 ft. over broken N. slope.

- 7.50 Draw, drains NE.; asc. 25 ft. over SE. slope.
14.80 Spur, projects E.; desc. 190 ft. along broken E. slope.

Chains

25.90 Wash, 40 lks. wide, 2 ft. deep, in Little Park Wash, drains SE., thence by triangulation, asc. about 450 ft. over steep, broken SW. slope.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 15 and 16, falls on ledge where cor. cannot be perpetuated.

40.20 Top of white sandstone ledge, end triangulation.

Point selected for the witness $\frac{1}{4}$ sec. cor. of secs. 15 and 16.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., on solid sandstone, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T18S R15E

$\frac{1}{4}$
S16|S15
W|C
1961

Asc. 520 ft. over steep, broken S. slope.

62.00 Spur, projects SW. and NE.; desc. 140 ft. over broken NE. slope.

80.00 Point for the cor. of secs. 9, 10, 15 and 16.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 8 ins. in the ground, and in a mound of stone, $3\frac{1}{2}$ ft. base to top, with brass cap mkd.

T18S R15E

S 9|S10
S16|S15
1961

Land, mountainous, broken.

Soil, rocky clay.

Timber, widely scattered scrub pinon and juniper.

N. $0^{\circ} 02'$ W., bet. sec. 9 and 10.

Over broken land through widely scattered scrub timber.

Desc. 400 ft. over steep, broken NE. slope.

28.00 Wash, drains E., continue descent.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 9 and 10.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins. in the ground, and in a mound of stone, $3\frac{1}{2}$ ft. base, to top, with brass cap mkd.

T18S R15E

$\frac{1}{4}$
S 9|S10
1961

Continue descent, thence by triangulation. Topography scaled from U. S. G. S. topographic sheets.

43.00 Approximate dist. to wash, 40 lks. wide, 5 ft. deep, drains SE.; asc. about 560 ft. over broken SW. slope.

... rve of the Subdivision of T. 18 S. R. 15 E.

Chains

- 46.50 Jeep trail, bears NW. and SE.
- 65.50 Spur, projects S. 10° E.; end triangulation. Asc. 25 ft. over broken SE. slope.
- 80.00 Point for the cor. of secs. 3, 4, 9 and 10.
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 4 ins. in the ground, and in a mound of stone, $3\frac{1}{2}$ ft. base to top, with brass cap mkd.

T18S R15E

S 4 | S 3

S 9 | S10

1961

Land, broken.
Soil, rocky clay.
Timber, scattered scrub pinon and juniper.

N. $0^{\circ} 04'$ W., bet. secs. 3 and 4.

Over broken, rolling land, through scattered timber.

Asc. 50 ft. over SE. slope.

- 7.50 Top of ascent, bears E. and W., thence over rolling land.
- 31.50 Spur, projects E., desc. 15 ft. along E. slope.
- 40.00 Point for the $\frac{1}{2}$ sec. cor. of secs. 3 and 4.
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., on solid sandstone, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T18S R15E

$\frac{1}{2}$
S 4 | S 3

1961

Thence by triangulation, asc. about 320 ft. over broken SE. slope. Topography scaled from U. S. G. S. topographic sheets.

- 72.00 Draw, drains SE.; asc. about 250 ft. over steep, broken S. slope.
- 76.90 Spur, projects SE., thence along E. slope. End triangulation.
- 79.01 The cor. of secs. 3, 4, 33 and 34, on N. bdy. of the Tp. monumented with an iron post, $2\frac{1}{2}$ ins. diam., set, mkd. and witnessed as described in the 1961 field notes, of the S. bdy. of T. 17 S., R. 15 E.

Land, mountainous, broken.
Soil, rocky clay.
Timber, scattered pinon and juniper.

From the cor. of secs. 1, 2, 35 and 36, on the north boundary of the Tp., monumented with a $2\frac{1}{2}$ in. iron post, set, mkd. and witnessed as described in the 1961 field notes of the S. bdy. of T. 17 S., R. 15 E.

Chains

S. 0° 01' E., bet. secs. 1 and 2.

Over mountainous land, through scattered timber.

Asc. 20 ft. over steep N. slope.

0.60 Slope changes; asc. 40 ft. over NW. slope.

7.10 Spur, projects W.; desc. 50 ft. over rocky SW. slope.

12.60 Draw, 40 lks. wide, 10 ft. deep, drains NW., asc. 240 ft. over steep N. slope.

24.60 Spur, projects W.; desc. 500 ft. over broken, ledge on SW. slope.

32.50 Ledge, 50 ft. high, bears E. and W., continue descent.

36.70 Wash, 20 lks. wide, 3 ft. deep, drains SW.

39.67 Point for the $\frac{1}{4}$ sec. cor. of secs. 1 and 2 at a calculated dist.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 8 ins. in the ground, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T18S R15E

$\frac{1}{4}$

S2|S1

1961

Cor. set on small spur, bet. two washes.

Continue descent.

42.70 Wash, 20 lks. wide, 2 ft. deep, drains SW.

53.30 Wash, 40 lks. wide, 3 ft. deep, drains SE.; asc. 80 ft. over gentle NE. slope.

64.20 Wash, 1.00 ch. wide, 8 ft. deep, drains E. about 8.00 chs., thence SE.

75.40 Spur, projects E.; desc. 20 ft. over gentle S. slope.

79.67 Point for the cor. of secs. 1, 2, 11 and 12 at a calculated dist. bet. the cor. of secs. 1, 6, 7 and 12, and the cor. of secs. 3, 4, 9 and 10.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins. in the ground, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T18S R15E

S 2 | S 1

S11 | S12

1961

Land, mountainous.

Soil, rocky clay.

Timber, scattered scrub pinon and juniper.

N. 89° 46' W., bet. secs. 2 and 11, on a calculated bearing, bet. the cor. of secs. 1, 6, 7 and 12, and the cor. of secs. 3, 4, 9 and 10.

Over broken, mountainous land through scattered timber.

Chains

By triangulation, asc. about 320 ft. over broken, ledgy NE. slope.
Topography scaled from U. S. G. S. topographic sheets.

20.00 Spur, projects NE.; desc. about 100 ft. over steep NW. slope.

27.00 Draw, drains N.; asc. about 150 ft. over rocky NE. slope.

38.70 Ledge, 10 ft. high, bears N. and SE., thence across top of spur.

39.95 End triangulation.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 2 and 11.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 4 ins. in the ground,
and in a mound of stone, $3\frac{1}{2}$ ft. base to top, with brass cap mkd.

T18S R15E

$\frac{1}{4}$ S 2

S11

1961

Continue across top of spur.

41.00 Ledge, 20 ft. high, bears N. and S., thence by triangulation, desc.
about 240 ft. over steep, rocky W. slope. Topography scaled from
U. S. G. S. topographic sheets.

49.00 Bottom of steep descent, thence desc. about 80 ft. over gentle,
rocky W. slope.

65.80 End triangulation on ledge, 50 ft. high, bears irregularly N. and S.,
thence by triangulation, desc. abruptly about 400 ft. over ledgy W.
slope. Topography scaled from U. S. G. S. topographic sheets.

76.00 Bottom of abrupt descent, bears N. and S., thence desc. about 10 ft.
over gentle W. slope.

80.00 Point for the cor. of secs. 2, 3, 10 and 11.

On a gentle W. slope, about 2.00 chs. from wash in Trail Canyon.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 8 ins. in the ground,
and in a mound of stone, $3\frac{1}{2}$ ft. base to top, with brass cap mkd.

T18S R15E

S 3 | S 2

S10 | S11

1961

Land, mountainous.

Soil, rocky, clay.

Timber, widely scattered scrub pinon and juniper.

N. $0^{\circ} 05'$ W., bet. secs. 2 and 3.

Over rolling land in bottom of Trail Canyon, through widely
scattered scrub timber.

Asc. 25 ft. along gentle W. slope.

6.40 Top of ascent, slopes W.; desc. 10 ft. over gentle NW. slope.

S. R. 15 E.

Chains

- 13.00 Trail, bears NE. and S. 10° W.
- 13.60 Wash, 1.00 ch. wide, 2 ft. deep, in Trail Canyon, drains irregularly S.; asc. 75 ft. over gentle, rocky SE. slope.
- 27.20 Small wash, drains SE.; continue ascent.
- 30.30 Small rocky point of spur, projects SE.; desc. 10 ft. over NE. slope.
- 32.30 Wash, 1.00 ch. wide, 2 ft. deep, in Trail Canyon, drains irregularly S.; asc. 190 ft. over broken, ledgy SW. slope.
- 40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 2 and 3.
On a SW. slope, 30 ft. below top and 25 lks. W. of 25 ft. ledge, bears NW. and SE.
Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 6 ins. in the ground, and in a mound of stone; 4 $\frac{1}{2}$ ft. base to top, with brass cap mkd.
- T18S R15E
 $\frac{1}{4}$
S 3 | S 2
1961
- Continue ascent.
- 41.00 Point of rocky spur, projects W.; desc. 160 ft. over broken NW. slope.
- 50.90 Wash, 1.00 ch. wide, 6 ft. deep, in Trail Canyon, drains irregularly S.; asc. 140 ft. over ledgy S. slope.
- 54.80 Spur, projects SE.; asc. 230 ft. over broken, ledgy SE. slope.
- 69.20 Rocky spur, projects E.; desc. 100 ft. over rocky NE. slope.
- 79.39 The cor. of secs. 2, 3, 34 and 35 on the N. bdy. of the Tp., monumented with a 2 $\frac{1}{2}$ in. iron post, set, mkd. and witnessed as described in the 1961 field notes of the S. bdy. of T. 17 S., R. 15 E.
Land, rolling S. portion, broken N. portion.
Soil, rocky clay, exposed sandstone.
Timber, widely scattered scrub pinon and juniper.
-
- From the cor. of secs. 15, 16, 21 and 22, hereinbefore described.
West, bet. secs. 16. and 21.
Over broken land through scattered timber.
Asc. 195 ft. over steep, broken E. slope.
- 5.70 Spur, projects N., thence by triangulation, desc. about 40 ft. along broken N. slope. Topography scaled from U. S. G. S. topographic maps.
- 28.00 Draw, drains NE.; asc. about 300 ft. over broken, ledgy E. slope.
- 34.60 End of triangulation. Asc. 80 ft. over gentle E. slope.
- 40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 16 and 21.

Survey of the Subdivision of T. 18 S., R. 15 E.

Chains

Set an iron post, 2½ ins. diam., 30 ins. long, 6 ins. in the ground, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T18S R15E

½ S16

S21

1961

Continue over gentle E. slope.

52.50 Ridge, bears NW. and SE.; desc. 10 ft. over gentle SW. slope.

56.70 Edge of high ledges, bears NW. and SE., thence by triangulation, desc. abruptly about 500 ft. over broken, ledgy SW. slope. Topography scaled from U. S. G. S. topographic sheets.

69.00 Draw, drains SW.; asc. about 200 ft. over broken, ledgy SE. slope.

74.00 Spur, projects S.; end triangulation.

74.02 Point selected for the witness cor. of secs. 16, 17, 21 and 20.

Set an iron post, 30 ins. long, 2½ ins. diam., 4 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T18S R15E

S17 | S16

S20 | S21

W C

1961

Desc. about 200 ft. to true point, be traverse.

80.00 Point for the cor. of secs. 16, 17, 21 and 20 falls on inaccessible NW. slope.

Land, mountainous, broken.

Soil, rocky, loamy clay.

Timber, scattered pinon and juniper.

N. 0° 03' W., bet. secs. 16 and 17, continuing on same traverse.

Over broken, mountainous land through scattered timber.

Desc. about 200 ft. over broken, ledgy NW. slope. Topography scaled from U. S. G. S. topographic sheets.

9.00 Draw, drains SW.; asc. about 450 ft. over broken, ledgy SW. slope.

19.10 Ridge, bears NW. and SE., end traverse, thence on true line, desc. 45 ft. over N. slope.

27.80 Spur, projects NE.; desc. 145 ft. over broken NE. slope.

31.60 Small draw, drains NE.; asc. 5 ft. over SE. slope.

36.50 Spur, projects NE.; desc. 250 ft. over broken NE. slope.

40.00 Point for the ¼ sec. cor. of secs. 16 and 17.

On a NE. slope, 75 ft. below spur.

ion of S. R. 15 E.

Chains

Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T18S R15E

¼
S17|S16
1961

Continue descent over broken NE. slope.

58.00 Wash, 20 lks. wide, 2 ft. deep, in bottom of Little Park Wash, drains S. 80° E.; asc. 125 ft. over SE. slope.

69.30 Spur, projects SW.; desc. abruptly 135 ft. over NW. slope.

70.70 Little Park Wash, 40 lks. wide, drains W. about 3.00 chs., thence NW.

77.00 Little Park Wash, 40 lks. wide, drains SE. about 6.00 chs., thence W.; asc. 60 ft. over SW. slope.

80.00 Point for cor. of secs. 8, 9, 16 and 17.

Set an iron post, 30 ins. long, 2½ ins. diam., 2 ins. in the ground, and in a mound of stone, 3½ ft. base to top, with brass cap mkd.

T18S R15E

S 8|S 9
S17|S16
1961

Land, mountainous, broken.
Soil, rocky sandy clay.
Timber, widely scattered pinon and juniper.

From the cor. of secs. 9, 10, 15 and 16, hereinbefore described.

N. 89° 59' W., bet. secs. 9 and 16.

Over broken, mountainous, land through widely scattered timber.

Asc. 330 ft. over steep, broken NE. slope.

7.00 Top of ascent, bears NW. and SE.; desc. 270 ft. over gentle SW. slope.

40.00 Point for the ¼ sec. cor. of secs. 9 and 16.

Set an iron post, 30 ins. long, 2½ ins. diam., 4 ins. in the ground, and in a mound of stone, 3½ ft. base to top, with brass cap mkd.

T18S R15E

¼ S 9
S16
1961

Continue descent.

41.70 Top of small tabletop mesa, desc. 80 ft. over W. slope.

65.70 Leave timber, bears N. and S., thence by triangulation, desc. about 500 ft. over broken, ledgy W. slope.

Chains

80.00 The cor. of secs. 9, 8, 17 and 16.
 Land, mountainous.
 Soil, rocky clay.
 Timber, widely scattered pinon and juniper.

From the cor. of secs. 32 and 33 on the S. bdy. of the Tp., hereinbefore described.

N. 0° 03' W., bet. secs. 32 and 33.

Over mountainous land through scattered timber.

Desc. 350 ft. over broken, rocky NW. slope.

0.05 The witness cor. of secs. 32 and 33, hereinbefore described.

1.10 Wash, 15 lks. wide, drains NW.

4.40 Wash, 40 lks. wide, 6 ft. deep, drains NW.

17.90 Wash, 40 lks. wide, 5 ft. deep, drains NW.

33.60 Wash, 1.00 ch. wide, drains E.; asc. 20 ft. over S. slope.

40.00 Point for the 1/4 sec. cor. of secs. 32 and 33.

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 12 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T18S, R15E
 S32 | S33
 1961

Asc. 50 ft. over gentle S. slope.

42.40 Wash, 60 lks. wide, drains E.

52.00 Bottom of steep ascent, bears E. and W.; asc. 210 ft. over steep, ledgy S. slope.

64.20 Top of ledge, 25 ft. high, bears W. and NE.; asc. 210 ft. over ledgy SE. slope.

75.60 Spur, projects E.

75.80 Ledge, 50 ft. high, bears E. and W.; desc. abruptly 170 ft. over ledgy NE. slope.

80.00 Point for the cor. of secs. 28, 29, 32 and 33.

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 16 ins. in the ground and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T18S R15E
 S29 | S28
 S32 | S33
 1961

Land, mountainous, broken.
 Soil, rocky clay.
 Timber, scattered pinon and juniper.

T18S R15E

Chains

From the cor. of secs. 31 and 32 on the S. bdy. of the Tp., hereinbefore described.

N. 0° 03' W., bet. secs. 31 and 32.

Over mountainous land through scattered timber.

Asc. 5 ft. over S. slope.

0.80 Spur, projects W.; desc. 130 ft. over rocky NW. slope.

12.40 Wash, 1.00 chs. wide, 10 ft. deep, drains NE.; asc. 65 ft. over rocky S. slope.

28.30 Spur, projects E.; desc. 15 ft. over N. slope.

31.90 Wash, 1.50 chs. wide, 4 ft. deep, drains E.; asc. 5 ft. over S. slope.

36.10 Spur, projects E.; desc. 60 ft. over N. slope.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 31 and 32.

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., on solid sandstone, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T18S R15E

$\frac{1}{4}$

S31|S32

1961

Continue descent.

41.50 Wash, 50 lks. wide, 4 ft. deep, drains E.; asc. 15 ft. over S. slope.

48.50 Spur, projects E.; desc. 360 ft. over broken, ledgy NE. slope.

59.80 Ledge, 20 ft. high, bears NW. and SE., continue descent.

70.40 Wash, drains NE.

76.30 Wash, 40 lks. wide, 3 ft. deep, drains NE.; asc. 40 ft. over SE. slope.

80.00 Point for the cor. of secs. 29, 30, 31 and 32.

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 6 ins. in the ground and in a mound of stone, 3 $\frac{1}{2}$ ft. base to top, with brass cap mkd.

T18S R15E

S30|S29

S31|S32

1961

Land, mountainous.

Soil, rocky clay.

Timber, scattered pinon and juniper.

From the cor. of secs. 28, 29, 32 and 33, hereinbefore described.

N. 89° 56' W., bet. secs. 29 and 32.

Over broken land covered with shadscale.

Asc. 20 ft. over NE. slope.

Survey of the Subdivision of T. 18 S., R. 15 E.

Chains

- 1.50 Spur, projects N., thence by triangulation, desc. about 600 ft. over abrupt, broken, ledgy NW. slope.
 - 20.00 Approximate dist. to draw, drains N.; asc. about 800 ft. over broken, ledgy NE. slope.
 - 39.30 Top of ledge, 100 ft. high, bears N. and SE.; end triangulation.
 - 39.98 Point for the $\frac{1}{4}$ sec. cor. of secs. 29 and 32.
Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., on solid sandstone, and in a mound of stone, $3\frac{1}{2}$ ft. base to top, with brass cap mkd.
- T18S R15E
 $\frac{1}{4}$ $\frac{S29}{S32}$
1961
- Asc. 40 ft. over gentle NE. slope. Enter scattered timber.
 - 47.70 Spur, projects NW.; desc. 15 ft. over gentle SW. slope.
 - 51.00 Ledge, 50 ft. high, bears N. and S., thence by triangulation, desc. about 400 ft. over broken W. slope.
 - 68.00 Approximate dist. to ledge, about 50 ft. high, bears N. and S., continue descent.
 - 76.50 Approximate dist. to draw, drains NE.; asc. about 80 ft. over steep, SE. slope.
 - 79.96 The cor. of secs. 29, 30, 31 and 32.
Land, mountainous, broken.
Soil, rocky clay, exposed sandstone.
Timber, none E. $\frac{1}{2}$, scattered pinon and juniper W. $\frac{1}{2}$.

General Description

Township 18 South, Range 15 East, is located on top of the Book Cliffs about 6 miles east of Woodside. It is mountainous, broken land covered with scattered to medium pinon and juniper timber. The northern portion is drained in a southerly direction by Little Park Wash and Trail Canyon, that drain into the Price River, which divides the township and drains in a south-easterly direction. The southern portion is drained in a northerly direction to the Price River. Soil is mostly rocky clay and loamy clay.

Elevations vary from 4,500 to 6,000 ft. above sea level. There is a jeep trail in the bottom of Little Park Wash, in the northern portion of the township, that connects with Trail Canyon. The only water noted was in the Price River.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS

| NAMES | CAPACITY |
|---------------------|------------|
| Rex J. Edwards | Transitman |
| Morris E. Blackburn | Chainman |
| Ferrel D. Reynolds | Chainman |
| Max Asay | Flagman |
| Parley Pratt | Cornerman |
| | |
| Gary W. Rutledge | Transitman |
| Wallace R. Ott | Chainman |
| Gary T. Oviatt | Chainman |
| Jerald R. Brindley | Flagman |
| Jeddie J. Judd | Cornerman |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |

CERTIFICATE OF CADASTRAL ENGINEER

I, Craig P. Sylvester, HEREBY CERTIFY upon honor that, in

pursuance of special instructions bearing date of the 31st day of May, 1932,
supplemental special instructions dated May 12, 1954 and September 2, 1960.
I have ~~surveyed~~ supervised the survey of the south boundary, the west boundary and a
portion of the subdivisional lines of Township 18 South, Range 15 East

of the Salt Lake Meridian, in the State of Utah, which are
represented in the foregoing field notes as having been executed by me ~~and~~ or
under my direction; and that
said survey has been made in strict conformity with said instructions, the Manual of Instructions for the
Survey of the Public Lands of the United States, and in the specific manner described in the foregoing
field notes.

Salt Lake City, Utah
August 8, 1962

Craig P. Sylvester
Craig P. Sylvester, Cadastral Surveyor

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT,
Washington, D. C., MAY 6 1963, 19

The foregoing field notes of the survey of the south boundary, the west boundary and a
portion of the subdivisional lines of Township 18 South, Range 15 East

executed by Glen B. Hatch and Fred R. Chappell - Cadastral Surveyors, under the
supervision of Craig P. Sylvester - Cadastral Surveyor
having been critically examined and found correct, are hereby approved.

E. L. Livingston
Chief, Division of Cadastral Engineering
Chief, Division of Engineering

~~CERTIFICATE OF TRANSCRIPT~~

~~I CERTIFY that the foregoing transcript of the field notes of the above-described surveys in
....., is a true copy of the original field notes.~~

~~Chief, Division of Cadastral Engineering~~

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
ORIGINAL

RECEIVED
BUREAU OF LAND MANAGEMENT

JUN 15 1961 10 00 AM

FIELD NOTES

OF THE

SURVEY OF A PORTION OF THE EAST BOUNDARY

AND

A PORTION OF THE SUBDIVISIONAL LINES

OF

TOWNSHIP 19 SOUTH, RANGE 14 EAST

Of the SALT LAKE Meridian,

In the State of UTAH

EXECUTED BY

Fred R. Chappell, Cadastral Surveyor

Glen B. Hatch, Cadastral Surveyor

Under the supervision of Craig P. Sylvester, Cadastral Surveyor

Under special instructions dated May 20, 1954, which provided

for the surveys included under Group No. 398, approved July 15, 1954

and assignment instructions dated April 25, 1961

Survey commenced May 23, 1961

Survey completed June 22, 1961

INDEX DIAGRAM

Township 19 SOUTH , *Range* 14 EAST

| | | | | | |
|----|----|------|----|-----|-----------|
| 6 | 5 | 4 | 3 | 7 9 | 5 1 2 |
| | | | | 6 | |
| 7 | 8 | 9 | 10 | 11 | 12 |
| | | 9 | | | |
| 13 | 17 | 16 8 | 15 | 14 | 13 |
| | | 7 | | | |
| 19 | 20 | 21 | 22 | 23 | 24 |
| 29 | 29 | 28 | 27 | 26 | 25 |
| 31 | 32 | 33 | 34 | 35 | 4 2 36 |

Township 19 South, Range 14 East

Chains

The north 4 miles of the east boundary were surveyed by J.C. Clark and Robert C. Yundt in 1941. The south 2 miles of the east boundary were surveyed by A.D. Ferron in 1884, and resurveyed by J.C. Clark and Robert C. Yundt in 1941. The west 4½ miles of the north boundary were surveyed by A.D. Ferron in 1884. The west 2 miles of the north boundary were resurveyed by J.C. Thoma in 1923. The west boundary was surveyed by A.D. Ferron in 1884, and resurveyed by J.C. Thoma in 1923. The south boundary was surveyed by A.D. Ferron in 1884, and resurveyed by H.W. Miller in 1912. The south boundary of sections 33, 34 and the west ½ mile of the south boundary of 35, on the north boundary were resurveyed by Fred R. Chappell concurrently. The north boundary along the south boundary of the east ½ mile of section 35 and section 36 was surveyed concurrently by Fred R. Chappell. A portion of the north boundary was surveyed concurrently by Glen B. Hatch. The west 2 ranges of the subdivision was surveyed by J.C. Thoma in 1923.

The following field notes are those of a survey of a portion of the east boundary and a portion of the subdivisional lines of T. 19 S., R. 14 E., deemed sufficient in extent to facilitate development of the natural resources, and mark the boundaries of those sections that normally are considered state school sections.

The survey was executed with W. & L. E. Gurley Solar Transits Nos. 580158 and 541327 constructed in accordance with the standard instrumental specifications of the Bureau of Land Management. The instrument was in good condition prior to the beginning of the survey and was maintained in proper adjustment throughout the progress of this survey.

Corners on east-west lines were set on the true latitudinal curve. Lines connecting previously established corners were run by random and true method, but for simplification of the record the random lines are omitted from the field notes. In accordance with the intent of the special instructions, all subdivisional corners established are calculated to be at the position they would occupy if the entire township were subdivided.

Measurements herein contained were made with a narrow steel tape, 8 chains in length, graduated every link for the first 100 links and thereafter at intervals of 10 links. The tape was tested by comparison with a one chain standard steel tape and found to be correct. Measurements were made on the slope with the vertical angle of each interval ascertained by a clinometer in good adjustment; horizontal equivalents alone are entered in the field notes. All lines of this survey were run by direct method where the lines were accessible; lines inaccessible were run by traverse or triangulation methods. Distances to topography on lines run by traverse or triangulation are approximately as scaled from Soil Conservation Planimetric Map. The details of such traverses or triangulations have been thoroughly checked and verified, and in order to simplify the record the diagrams and reductions are omitted from these field notes.

The direction of the lines of this survey were determined by reference to true meridians established on line by altitude observations on the sun. The lines were carried forward by sustained angulation being supplemented by other numerous altitude observations on the sun taken throughout the progress of the survey.

The geographic position for the southeast corner of the township is at latitude 39° 07' 09.61" N. and longitude 110° 17' 18.12" W. as adjusted from traverses to U.S.G.S. triangulation station "Smith".

The magnetic declination was read at a number of stations throughout the township and the average of these readings was found to be 16° 00' East.

a Portion of the E. Bd. of T. 19 S. R. 14 E.

Chains

Survey of a Portion of the East Boundary of T. 19 S., R. 14 E.

Beginning at the lot cor. of secs. 1 and 6, Tps. 19 S., Rs. 14 and 15 E., monumented with a 1 in. iron post, set, mkd. and witnessed as described in the official record. This cor. now functions as the 1/16 sec. cor. of secs. 1 and 6 and was remarked.

T19S
R14E R15E

S1 S6

1/16

80

1961

1941

North, bet. secs. 1 and 6. (continued measurement)

Over rolling land through scattered timber.

Asc. 35 ft. over S. slope.

84.50 Spur, projects E., thence by triangulation, desc. about 130 ft. over rocky N. slope. Topography approximated.

88.50 Approximate dist. to draw, drains E., asc. about 80 ft. over ledgy S. slope.

95.47 Intersect the N. bdy. of the Tp.

Point for the closing cor. of Tp. 19 S., Rs. 14 and 15 E.

Set an iron post 30 ins. long, 2½ ins. diam., 3 ins. in the ground and in a mound of stone, 4 ft. base, to top, with brass cap mkd.

T18S R15E

S 31

S1 S6

CC

T19S

R14E R15E

1961

From this cor., the S. ¼ sec. cor. of sec. 31, T. 18 S., R. 15 E. bears west 6.31 chs., and is monumented with a 2½ in. iron post, set, mkd. and witnessed as described in the field notes of the S. bdy. of Tp. 18 S., R. 15 E.

Land, rolling.

Soil, rocky loam.

Timber, scattered pinon and juniper.

Survey of Subdivision of Township 19 South, Range 14 East

From the cor. of secs. 1, 2, 35 and 36, on the S. bdy. of the Tp., monumented with a 3 in. iron post, set, mkd. and witnessed as described in the official record.

N. 0°01' W., bet. secs. 35 and 36.


Survey of a Subdivision of T. 19 S., R. 14 E.

Chains

Over rolling clay hills covered with scattered shadscale.


- 19.00 Road, unimproved, bears NE. and SW.
- 22.80 Wash, 20 lks. wide, 1 ft. deep, drains SW., asc. 45 ft. over SE. slope.
- 26.00 Road, unimproved, bears NW. and SE.
- 26.70 Spur, projects SW., desc. NW. slope.
- 28.00 Wash, drains SW., asc. SE. slope.
- 31.30 Spur, projects SW., desc. 20 ft. over NW. slope.
- 34.70 Wash, 30 lks. wide, 2 ft. deep, drains SW., asc. 20 ft. over SE. slope.
- 38.70 Spur, projects SW., desc. 5 ft. over NW. slope.
- 40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 35 and 36.

Set an iron post 30 ins. long, 2½ ins. diam., 20 ins. in the ground and in a collar of stone. Brass cap mkd.



- 41.80 Spur, projects SW., desc. 10 ft. over NW. slope.
- 44.30 Wash, drains SW., asc. 20 ft. over SE. slope.
- 48.80 Spur, projects SW., desc. 10 ft. over NW. slope.
- 59.20 Road, unimproved, bears E. and W.
- 66.50 Wash, 30 lks. wide, 2 ft. deep, drains SW., asc. 10 ft. over SE. slope.
- 74.30 Spur, projects SW., desc. 35 ft. over NW. slope.
- 80.00 Point for the cor. of secs. 25, 26, 35 and 36.

Set an iron post 30 ins. long, 2½ ins. diam., 20 ins. in the ground, brass cap mkd.



No accessories available.

Land, rolling clay hills.
Soil, clay.
No timber.
Undergrowth, shadscale.

Surve of a S vision of T. 19 S. R. 14 E.

Chains

From the cor. of secs. 25, 30, 31 and 36 on the E. bdy. of the Tp., monumented with a 2 in. iron post, set, mkd. and witnessed as described in the official record.

N. 89° 49' W.; bet. secs. 25 and 36.

Over rolling land covered with scattered shadscale.

Desc. 60 ft. over NW. slope.

33.50 Wash, 40 lks. wide, 3 ft. deep, drains SW., asc. 5 ft. over SE. slope.

37.20 Spur, projects SW., desc. 30 ft. over NW. slope.

40.10 Point for the $\frac{1}{4}$ sec. cor. of secs. 25 and 36 falls on boulder where cor. cannot be perpetuated.

40.55 Point selected for the witness $\frac{1}{4}$ sec. cor. of secs. 25 and 36.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground, and in a collar of stone. Deposit glass at base of iron post, brass cap mkd.

T19S R14E
 $\frac{1}{4}$ S25 W
 S36 C
 1961

Cont. descent.

43.90 Wash, 20 lks. wide, 2 ft. deep, drains SW., asc. 15 ft. over SE. slope.

53.70 Spur, projects SW., desc. 30 ft. over NW. slope.

57.70 Wash, 10 lks. wide, 2 ft. deep, drains SW., asc. 20 ft. over SE. slope.

63.60 Spur, projects SW., desc. 45 ft. over NW. slope.

80.20 The cor. of secs. 25, 26, 35 and 36.

Land, rolling.
 Soil, clay.
 Undergrowth, shadscale.

Point for the cor. of secs. 1 and 2, on the N. bdy. of the Tp., at a position 80.00 chs. in westing from the cor. of Tps. 19 S., Rs. 14 and 15 E.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins. in the ground and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T18S
 S35
 S2 S1
 T19S R14E
 1961

Survey of a Subdivision of T. 19 S., R. 14 E.


Chains

From this cor., the cor. of secs. 35 and 36, T. 18 S., R. 14 E., bears E. 9.35 chs., monumented with a 2½ in. iron post, set, mkd. and witnessed as described in the S. bdy. of T. 18 S., R. 14 E.

Point for the cor. of secs. 2 and 3, is on the N. bdy. of the Tp. and is at a position 80.00 chs. westing from the cor. of secs. 1 and 2.

Set an iron post 30 ins. long, 2½ ins. diam. 20 ins. in the ground and in a collar of stone, with brass cap mkd.

T18S R14E




T19S
1961

From this cor. the cor. of secs. 34 and 35, T. 18 S., R. 14 E. bears N. 88° 32' E. 8.97 chs. dist. monumented by an iron post 2½ ins. diam. set, mkd. and witnessed as described in the Survey of the S. bdy. of T. 18 S., R. 14 E.

Point for the N. ¼ sec. cor. of secs. 2, is on the N. bdy. of the Tp. and is midpoint bet. the cor. of secs. 1 and 2, and the cor. of secs. 2 and 3.

Set an iron post 30 ins. long, 2½ ins. diam., 20 ins. in the ground and in a collar of stone, with brass cap mkd.

T18S R14E



T19S
1961

From this cor. the S. ¼ sec. cor. of sec. 35, T. 18 S., R. 14 E. bears S. 89° 47' E. 9.35 chs. dist. monumented by an iron post 2½ ins. diam. set, mkd. and witnessed as described in the survey of the S. bdy. of T. 18 S., R. 14 E.

From the cor. of secs. 1 and 2 on the N. bdy.

S. 0° 01' E. bet. secs. 1 and 2.

Over broken, rocky land.

By triangulation, asc. about 200 ft. over broken NW. slope. Topography approximated.

20.13 End of triangulation.

26.00 Top of ascent slopes W., desc. 160 ft. over broken SW. slope over numerous large boulders and blue clay spurs.

29.91 Point for the ¼ sec. cor. of secs. 1 and 2.

ub vision of . 19 S. . 14 E.

Chains

Set an iron post 30 ins. long, 2½ ins. diam. 20 ins. in the ground and in a collar of stone, with brass cap mkd.

T19S R14E

½
S2 | S1

1961

Cor. falls on W. slope of blue clay spur.

- 48.40 Draw, drains SW., asc. 50 ft. over broken NW. slope to witness cor.
61.91 Point selected for the witness cor. of secs. 1, 2, 11 and 12.

Set an iron post 30 ins. long, 2½ ins. diam., 8 ins. in the ground and in a mound of stone, 3½ ft. base to top, with brass cap mkd.

T19S R14E

WC
S2 | S1
S11 | S12

1961

- 69.91 Point for the cor. of secs. 1, 2, 11, and 12 at a position calculated to be bet. the cor. of secs. 1, 6, 7 and 12 on E. bdy. and the cor. of secs. 4, 5, 8 and 9, falls on inaccessible ledgy NW. slope. Cannot be monumented.

Land, broken.

Soil, rocky clay.

Undergrowth, scattered shadscale.

N. 89° 59' W., bet. secs. 2 and 11 on a calculated bearing bet. the cor. of secs. 1, 6, 7 and 12 on the E. bdy. and the cor. of secs. 4, 5, 8 and 9.

Over broken, rocky land.

By traverse, desc. about 100 ft. over ledgy NW. slope. Topography approximated.

- 11.00 Approximate dist. to bottom of steep descent, thence desc. over rocky W. slope, 150 ft.
29.81 End traverse, thence on a true line, continue descent.
40.00 Point for the ¼ sec. cor. of secs. 2 and 11.
Set an iron post 30 ins. long 2½ ins. diam., 20 ins. in the ground. Deposit glass at base of iron post, brass cap mkd.

T19S R14E

¼
S2
S11

1961

No accessories available.

Thence over rolling land, asc. 15 ft. over gentle E. slope.

Survey of a Subdivision of T. 19 S., R. 14 E.

Chains

- 42.70 Top of ascent, bears irregular N. and S., desc. 220 ft. over rolling W. slope.
- 46.30 Top of blue clay ledge, bears N. and S., cont. descent.
- 80.00 Point for the cor. of secs. 2, 3, 10 and 11.
Set an iron post 30 ins. long, 2½ ins. diam., 20 ins. in the ground and in a collar of stone, with brass cap mkd.

T19S R14E

| | |
|-----|-----|
| S3 | S2 |
| S10 | S11 |

1961

Deposit glass at base of iron post.

Land, broken, E. portion; rolling W. portion.
Soil, rocky clay.
Undergrowth, shadscale.

N. 0° 03' E. bet. secs. 2 and 3.

Over rolling land covered with scattered shadscale.

Desc. 60 ft. over rolling land.

- 5.80 Wash, 20 lks. wide, 3 ft. deep, drains W.
- 38.60 Wash, 30 lks. wide, 2 ft. deep, drains W.
- 40.00 Point for the ¼ sec. cor. of secs. 2 and 3.
Set an iron post 30 ins. long, 2½ ins. diam., 20 ins. in the ground and in a collar of stone, with brass cap mkd.

T19S R14E

| | |
|----|----|
| ¼ | S2 |
| S3 | S2 |

1961

Cont. over rolling land.

- 44.20 Road, unimproved, bears E. and W.
- 56.00 Wash, drains W.
- 69.84 The cor. of secs. 2 and 3, on the N. bdy.

Land, rolling.
Soil, clay.
Undergrowth, scattered shadscale.

From the cor. of secs. 16, 17, 20 and 21, monumented with a 2 in. iron post, set, mkd. and witnessed as described in the official record.

S. 89° 49' E., bet. secs. 16 and 21.

Survey of Subdivision of T. 19 S., R. 14 E.

Chains

Over rolling land through scattered shadscale.

Desc. 60 ft. over gently rolling land.

40.00

Point for the $\frac{1}{4}$ sec. cor. of secs. 16 and 21.Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam. 20 ins. in the ground and in a collar of stone, with brass cap mkd.

T19S R14E

$$\frac{1}{4} \quad \frac{S16}{S21}$$

1961

Asc. 40 ft. over gently rolling land.

40.50

Trail road, bears N. and S.

46.70

Wash, 15 lks. wide, 3 ft. deep, drains S.

63.00

Trail road, bears SW. and NE.

68.20

Spur, projects S., desc. 30 ft. over gentle E. slope.

80.00

Point for the cor. of secs. 15, 16, 21 and 22.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 22 ins. in the ground and in a collar of stone, brass cap mkd.

T19S R14E

$$\begin{array}{c|c} S16 & S15 \\ \hline S21 & S22 \end{array}$$

1961

Land, rolling.

Soil, clay.

Undergrowth, shadscale.

N. $0^{\circ} 02'$ W. bet. secs. 15 and 16.

Over rolling land with scattered shadscale.

2.40

Telephone line bears NW. and SE.

31.80

Center of U.S. Highway 50 and 6, bears N. $9^{\circ} 30'$ W. and S. $9^{\circ} 30'$ W.

40.00

Point for the $\frac{1}{4}$ sec. cor. of secs. 15 and 16.Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground and in a collar of stone, brass cap mkd.

T19S R14E

$$\frac{1}{4} \quad \frac{S16}{S15}$$

1961

Asc. 30 ft. over gently rolling land.

Survey of Subdivision of T. 19 S., R. 14 E.

Chains

44.60 Road, unimproved, bears E. and W.

57.20 Trail road, bears NE. and SW.

80.00 Point for the cor. of secs. 9, 10, 15 and 16.

Set an iron post 30 ins. long, 2½ ins. diam. 20 ins. in the ground and in a collar of stone, brass cap mkd.

T19S R14E
 $\frac{S9}{S16} \frac{S10}{S15}$
 1961

Land, rolling.
 Soil, clay.
 Undergrowth, shadscale.

N. 89° 51' W., bet. secs. 9 and 16.

Over rolling land with shadscale and small brush.

Asc. 40 ft. over gently rolling land.

8.10 Center of U.S. Highway 50 and 6, bears N. 9° 30' W. and S. 9° 30' E.

13.10 Telephone line, bears N. 9° 30' W. and S. 9° 30' E.

19.60 Spur, projects N., desc. 40 ft. over gentle W. slope.

40.02 Point for the ¼ sec. cor. of secs. 9 and 16.

Set an iron post 30 ins. long, 2½ ins. diam. 22 ins. in the ground and in a collar of stone, brass cap mkd.

T19S R14E
 $\frac{1}{4} \frac{S9}{S16}$
 1961

Asc. 130 ft. over rolling land.

80.04 The cor. of secs. 8, 9, 16 and 17, monumented with a 2 in. iron post, set, mkd. and witnessed as described in the official record.

Land, rolling.
 Soil, clay.
 Undergrowth, shadscale and small brush.

General Description

Township 19 South, Range 14 East, is located about 5 miles south of Woodside. It is rolling desert land with scattered shadscale undergrowth, except in the northeast corner; this portion lies on the rim of the Book Cliffs, and is about 1500 ft. higher than the rest of the township. That portion on the Book Cliffs is covered with scattered scrub pinon and juniper trees. The soil in this portion is rocky, sandy clay with exposed sandstone; the rest is clay. The area is drained in a southerly direction. The Denver and Rio Grande Western Railroad and U.S. Highway 50 and 6, run in a southerly direction through the center of the township. There are a number of unimproved dirt roads throughout the township. No permanent sources of water in the township.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS

| NAMES | CAPACITY |
|---------------------|------------|
| Gary W. Rutledge | Transitman |
| Wallace R. Ott | Chainman |
| Gary T. Oviatt | Chainman |
| Jerald Brindley | Flagman |
| Jeddie J. Judd | Cornerman |
| | |
| Rex J. Edwards | Transitman |
| Morris E. Blackburn | Chainman |
| Ferrel D. Reynolds | Chainman |
| Max Asay | Flagman |
| Parley Pratt | Cornerman |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
ORIGINAL

DEPT. OF THE INTERIOR
BUR. OF LAND MGMT

1963 JUN 3 AM 10 00 0

FIELD NOTES

RECORDED
21 JUL 1963
BUREAU OF LAND MGMT

OF THE

SURVEY OF SECTION 2

OF

TOWNSHIP 19 SOUTH, RANGE 15 EAST

Of the SALT LAKE Meridian,

in the State of UTAH

EXECUTED BY

Glen B. Hatch, Cadastral Surveyor

Under the supervision of Craig P. Sylvester, Cadastral Surveyor

Under special instructions dated May 20, 1954, which provided

for the surveys included under Group No. 398, approved July 15, 1954

and assignment instructions dated April 25, 1961

Survey commenced May 19, 1961

Survey completed May 26, 1961

INDEX DIAGRAM

Township 19 SOUTH , Range 15 EAST

| | | | | | | | |
|----|----|----|----|---|----|---|----|
| 6 | 5 | 4 | 3 | 4 | 5 | 2 | 1 |
| | | | | | 2 | | |
| 7 | 8 | 9 | 10 | | 11 | | 12 |
| 13 | 17 | 16 | 15 | | 14 | | 18 |
| 19 | 20 | 21 | 22 | | 23 | | 24 |
| 25 | 26 | 27 | 28 | | 29 | | 30 |
| 31 | 32 | 33 | 34 | | 35 | | 36 |

Township 19 South, Range 15 East

Chains

The South 2 miles of the west boundary was surveyed by A.D. Ferron in 1884, and was resurveyed by J.C. Clark and Robert C. Yundt in 1941. A portion of the west boundary, the south boundary and a portion of the subdivision was surveyed by J.C. Clark and Robert C. Yundt in 1941. The east boundary was surveyed by Robert C. Yundt in 1941-42. A portion of the north boundary was surveyed by Ralph Gentry in 1915. A portion of the north boundary was surveyed concurrently by Glen B. Hatch.

The following field notes are those of a survey of section 2, T. 19 S., R. 15 E., deemed sufficient in extent to facilitate development of the natural resources and mark the boundaries of those sections that normally are considered state school sections.

The survey was executed with a W. & L. E. Gurley Solar Transit No. 580158 constructed in accordance with the standard instrumental specifications of the Bureau of Land Management. The instrument was in good condition prior to the beginning of the survey and was maintained in proper adjustment throughout the progress of this survey.

Corners on east-west lines were set on the true latitudinal curve. Lines connecting previously established corners were run by random and true method, but for simplification of the record the random lines are omitted from the field notes. In accordance with the intent of the special instructions, all subdivisional corners established are calculated to be at the position they would occupy if the entire township were subdivided.

Measurements herein contained were made with a narrow steel tape, 8 chains in length, graduated every link for the first 100 links and thereafter at intervals of 10 links. The tape was tested by comparison with a one chain standard steel tape and found to be correct. Measurements were made on the slope with the vertical angle of each interval ascertained by a clinometer in good adjustment; horizontal equivalents alone are entered in the field notes. All lines of this survey were run by direct method where the lines were accessible; lines inaccessible were run by traverse or triangulation methods. Distances to topography on lines run by traverse or triangulation are approximately as scaled from U. S. G. S. topographic sheets. The details of such traverses or triangulations have been thoroughly checked and verified, and in order to simplify the record the diagrams and reductions are omitted from these field notes.

The direction of the lines of this survey were determined by reference to true meridians established on line by altitude observations on the sun. The lines were carried forward by sustained angulation being supplemented by other numerous altitude observations on the sun taken throughout the progress of the survey.

The geographic position for the southeast corner of section 2 is at latitude 39° 11' 28.93" N. and longitude 110° 11' 37.69" W. as adjusted from traverses to U. S. G. S. triangulation station "Smith".

The magnetic declination was read at a number of stations throughout the township and the average of these readings was found to be 16° East.

Survey of Section 2, Township 19 South, Range 15 East

Beginning at the cor. of secs. 2, 3, 10 and 11, monumented with a 2 in. iron post, set, mkd. and witnessed as described in the official record.

Surve o Sec, 2 T. 19 S. R. 15 E.

Chains

East, bet. secs. 2 and 11.

Over mountainous land through dense timber.

Asc. 225 ft. over steep, ledgy NW. slope.

6.90 Spur, projects N., thence by triangulation, desc. about 200 ft. over steep, broken NE. slope. Topography approximated.

9.00 Approximate dist. to draw, drains N. asc. along N. slope.

28.00 Approximate dist. to draw, drains N., asc. about 400 ft. over steep, broken NW. slope.


36.05 End triangulation on ledge, about 20 ft. high, bears N. and S.

40.00 Point for the 1/4 sec. cor. of secs. 2 and 11.

On a gentle W. slope.

Set an iron post 30 ins. long, 2 1/2 ins. diam., 8 ins. in the ground and in a mound of stone 4 ft. base to top, with brass cap mkd.

T19S R15E



1961

41.20 Spur, projects N., desc. 75 ft. over gentle NE. slope.

49.20 Wash, 20 lks. wide, 2 ft. deep, drains NE.

60.00 Wash, 40 lks. wide, 2 ft. deep, drains N.

71.30 Wash, 50 lks. wide, 5 ft. deep, drains N., asc. 10 ft. over gentle W. slope.


74.80 Small spur, projects N., desc. 20 ft. along rocky N. slope.

80.00 Point for the cor. of secs. 1, 2, 11 and 12.

On a N. slope.

Set an iron post 30 ins. long, 2 1/2 ins. diam., on solid sandstone and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T19S R15E



1961

Land, mountainous.
Soil, rocky, sandy loam.
Timber, dense pinon and juniper.

N. 0° 01' W. bet. secs. 1 and 2.

Over mountainous land through dense timber.

Survey of Sec. 2, T. 19 S., R. 15 E.

Chains

By triangulation, desc. about 100 ft. over rocky N. slope. Topography approximated.

10.00 Approximate dist. to draw, drains E., asc. about 100 ft. over ledgy SE. slope.

20.00 Approximate dist. to N. rim of draw, ledge, bears E. and W., and also draw drains SE., thence asc. about 50 ft. over gentle S. slope.

36.40 Spur, projects E.; end triangulation.

Desc. 60 ft. over N. slope.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 1 and 2.

On a N. slope, 40 ft. below spur.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., on solid sandstone and in a mound of stone 4 ft. base to top, with brass cap mkd.

T19S R15E

$\frac{1}{4}$
S2 | S1

1961

Continue descent.

44.70 South rim of Price River, ledge, about 150 ft. high, bears NW. and E., leave timber, thence by triangulation, desc. about 800 ft. over ledgy, broken NE. slope. Topography approximated.

57.00 Approximate dist. to draw, drain NE.

67.50 Approximate dist. to spur, projects NE., continue desc. over broken NE. slope.

77.50 Approximate dist. to draw, drains NE., asc. about 30 ft. along rocky E. slope.

80.00 Point for the $\frac{1}{16}$ sec. cor. of secs. 1 and 2.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins. in the ground and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T19S R15E

$\frac{1}{16}$

S2 | S1

80

1961

End triangulation, continue ascent along E. slope.

88.70 Spur, projects NE., desc. 30 ft. over gentle N. slope.

93.00 Ledge, about 150 ft. high, bears E. and W., desc. abruptly 200 ft. over N. slope.

94.30 Base of ledge, bears E. and W., continue desc. over steep, rocky N. slope.

97.13 Intersect the N. bdy. of the Tp.

Su e of Sec. 2 T. 19 S. R. 15 E.

Chains

Point for the closing cor. of secs. 1 and 2.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., on solid sandstone and in a mound of stone, 5 ft. base to top, with brass cap mkd.

T18S R15E

| | |
|------|----|
| S36 | |
| S2 | S1 |
| | |
| CC | |
| T19S | |
| 1961 | |

From this cor., the true point for the S. $\frac{1}{4}$ sec. cor. of sec. 36, T. 18 S., R. 15 E., bears W. 12.27 chs. from which its witness cor. bears W. 0.60 chs., and is monumented with an iron post, set, mkd. and witnessed as described in the 1961 field notes of the south bdy. of T. 18 S., R. 15 E.

Land, mountainous S. $\frac{1}{2}$; broken N. $\frac{1}{2}$.

Soil, rocky, sandy clay.

Timber, dense pinon and juniper S. $\frac{1}{2}$; none N. $\frac{1}{2}$.

From the cor. of secs. 2, 3, 10 and 11, monumented with a 2 in. iron post, set, mkd. and witnessed as described in the official record.

N. $0^{\circ} 01'$ W., bet. secs. 2 and 3.

Over mountainous land covered with shadscale.

By triangulation, desc. about 600 ft. over rocky, steep NW. slope. Topography approximated.

25.50 Ledge, about 100 ft. high, bears NE. and SW.; end one triangulation, beginning of another, continue descent.

36.47 End triangulation. Point selected for the witness $\frac{1}{4}$ sec. cor. of secs. 2 and 3.

On ledge, about 50 ft. high, bears SW. and N. about 1.00 ch., thence NE.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., on solid sandstone and in a mound of stone 4 ft. base to top, with brass cap mkd.

T19S R15E

| |
|---------------|
| $\frac{1}{4}$ |
| W C |

| | | |
|----|---|----|
| S3 | ↑ | S2 |
|----|---|----|

1961

By triangulation, continue descent.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 2 and 3 falls in inaccessible draw, about 2.00 chs. wide, 5 ft. deep, drains NE. where cor. cannot be perpetuated. Asc. about 250 ft. over broken, ledgy SE. slope.

60.10 Rocky spur, projects E.; end one triangulation, begin another; desc. about 300 ft. over broken, ledgy NE. slope.

Survey of Sec. 2, T. 19 S., R. 15 E.

Chains

71.10 Approximate dist. to canyon, drains NE., asc. about 50 ft. over steep talus SE. slope to 1/16 cor.

80.00 Point for the 1/16 sec. cor. of secs. 2 and 3.

Set an iron post 30 ins. long, 2½ ins. diam., 10 ins. in the ground and in a mound of stone, 3½ ft. base to top, with brass cap mkd.

T19S R15E

1/16

S3 S2

80

1961

End of triangulation, thence by triangulation, asc. about 550 ft. over broken ledges 100 ft. to 200 ft. high, on SE. slope.

87.30 Top of ledge, about 100 ft. high, bears irregularly E. and W.; end triangulation, thence asc. 60 ft. over S. slope.

96.70 Spur, projects irregularly E., desc. 10 ft. over NW. slope.

97.08 Intersect the north bdy. of the Tp.

Point for the closing cor. of secs. 2 and 3.

Set an iron post 30 ins. long, 2½ ins. diam., 10 ins. in the ground and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T18S R15E

S 35

S3 S2

CC

T19S

1961

From this cor., the S. ¼ sec. cor. of sec. 35, T. 18 S., R. 15 E., bears W. 12.27 chs., and is monumented with an iron post set, mkd. and witnessed as described in the 1961 field notes of the S. bdy. of T. 18 S., R. 15 E.

Land, broken.
Soil, rocky, sandy clay.
No timber.

Point for the N. ¼ sec. cor. of sec. 2 midpoint bet. the closing cor. of secs. 2 and 3, and the closing cor. of secs. 1 and 2.

Set an iron post 30 ins. long, 2½ ins. diam., 12 ins. in the ground and in a mound of stone 3 ft. base to top, with brass cap mkd.

T18S R15E

S 2

T19S

1961

From this cor., the true point for the cor. of secs. 35 and 36 bears W. 12.27 chs., from which its witness cor. bears W. 10.30 chs. monumented with an iron post, set, mkd. and witnessed as described in the 1961 field notes of the S. bdy. of T. 18 S., R. 15 E.

General Description

Section 2, T. 19 S., R. 15 E. is mountainous broken land on the S. rim of the Price River. The southeast portion is covered with dense piñon and juniper timber, none in the remaining portion. The soil is rocky sandy clay and loam. It is drained in a northerly direction. No roads or water is in this section. The general elevation is 5,000 ft. above sea level.

54
CERTIFICATE OF CADASTRAL ENGINEER


We Glen B. Hatch and Craig P. Sylvester, HEREBY CERTIFY upon honor that,
pursuance of special instructions bearing date of the 20th day of May,

I have surveyed Section 2, Township 19 South, Range 15 East

of the Salt Lake Meridian, in the State of Utah, which are
represented in the foregoing field notes as having been executed by us and under our direction; and that
said survey has been made in strict conformity with said instructions, the Manual of Instructions for the
Survey of the Public Lands of the United States, and in the specific manner described in the foregoing
field notes.

Salt Lake City, Utah

February 8, 1962


Craig P. Sylvester, Cadastral Surveyor

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT,

Washington, D. C., MAY 6 1963, 19

The foregoing field notes of the survey of Section 2, Township 19 South, Range 15 East,
Salt Lake Meridian, Utah

executed by Glen B. Hatch, Cadastral Surveyor, under the supervision of Craig P. Sylvester,
having been critically examined and found correct, are hereby approved. Cadastral Surveyor


E. L. Huntington
Cadastral Engineering Staff Officer,
Chief, Division of Engineering

CERTIFICATE OF TRANSCRIPT

I CERTIFY that the foregoing transcript of the field notes of the above-described surveys in _____
_____, is a true copy of the original field notes.

Cadastral Engineering Staff Officer.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

DEPT. OF THE INTERIOR
BUREAU OF LAND MGMT

ORIGINAL

1953 JUN 5 AM 10 00 .0

FIELD NOTES

OF THE

RECEIVED
STATE & LAND OFFICE
SALT LAKE CITY, UTAH

SURVEY

OF A PORTION OF THE SUBDIVISIONAL LINES

OF

TOWNSHIP 20 SOUTH, RANGE 15 EAST

Of the SALT LAKE Meridian,

the State of UTAH

EXECUTED BY

Fred R. Chappell, Cadastral Surveyor

Glen B. Hatch, Cadastral Surveyor

Under the supervision of Craig P. Sylvester, Cadastral Surveyor

Under special instructions dated May 20, 1954, which provided

for the surveys included under Group No. 398, approved July 15, 1954

and assignment instructions dated April 25, 1961

Survey commenced May 17, 1961

Survey completed May 19, 1961

INDEX DIAGRAM

Township 20 SOUTH, Range 15 EAST

| | | | | | |
|----|----|----------------|------|----|----|
| 6 | 5 | 4 | 4 3 | 2 | 1 |
| 7 | 8 | 9 | 3 10 | 11 | 12 |
| 13 | 17 | 7 6 16 5 | 2 15 | 14 | 18 |
| 19 | 20 | 21 | 2 22 | 23 | 24 |
| 29 | 29 | 28 | 27 | 26 | 25 |
| 31 | 32 | 33 | 34 | 35 | 36 |

GPO 866119

Fred R. Chappell _____

Glen B. Hatch _____

Chains

The south $2\frac{1}{2}$ miles of the east boundary was surveyed by A. D. Ferron in 1885. The south $2\frac{1}{2}$ miles of the east boundary was resurveyed by Lewis and Blossom in 1898. The north $3\frac{1}{2}$ miles of the east boundary were surveyed by Lewis and Blossom in 1898. The south 1 miles of the east boundary was resurveyed by R. E. Clark in 1912. The north boundary was surveyed by J. C. Clark and Robert C. Yundt in 1941. The west boundary was surveyed by A. D. Ferron in 1884. The west boundary was resurveyed by Miller and Clark in 1912. The Fourth Standard Parallel South (South boundary) was surveyed by A. D. Ferron in 1880, and resurveyed by himself in 1881. In 1906, Heist and Wooley resurveyed the south boundary. In 1912, Miller and Clark resurveyed the south boundary, and surveyed a portion of the subdivisional lines. In 1956, Craig P. Sylvester resurveyed the north 5 miles of the east boundary and surveyed a portion of the subdivisional lines.

The following field notes are those of a portion of the subdivisional lines of T. 20 S., R. 15 E., deemed sufficient in extent to facilitate development of the natural resources and mark the boundaries of those sections that normally are considered state school sections.

The survey was executed with W. & L. E. Gurley Solar Transits Nos. 541327 and 580158, constructed in accordance with the standard instrumental specifications of the Bureau of Land Management. The instruments were in good condition prior to the beginning of the survey and were maintained in proper adjustment throughout the progress of the survey.

Lines connecting previously established corners were run by random and true method, but for simplification of the record the random lines are omitted from the field notes. In accordance with the intent of the special instructions, all subdivisional corners established are calculated to be at the position they would occupy if the entire township were subdivided.

Measurements herein contained were made with a narrow steel tape, 8 chains in length, graduated every link for the first 100 links and thereafter at intervals of 10 links. The tape was tested by comparison with a one chain standard steel tape and found to be correct. Measurements were made on the slope with the vertical angle of each interval ascertained by a clinometer in good adjustment; horizontal equivalents alone are entered in the field notes. All lines of this survey were run by direct method where the lines were accessible; lines inaccessible were run by traverse or triangulation methods. Distances to topography on lines run by traverse or triangulation are approximately as scaled from U. S. G. S. topographic sheets. The details of such traverses or triangulations have been thoroughly checked and verified, and in order to simplify the record the diagrams and reductions are omitted from these field notes.

The direction of the lines of this survey were determined by reference to true meridians by altitude observations on the sun. The lines were carried forward by sustained angulation being supplemented by other numerous altitude observations on the sun taken throughout the progress of the survey.

The geographic position for the southeast corner of the township is at latitude $39^{\circ} 01' 54''$ N. and longitude $110^{\circ} 10' 32''$ W. as taken from the plat of the 1956 survey.

The magnetic declination was read at a number of stations throughout the township and the average of these readings was found to be 16° East.

Chains

Survey of a Portion of the Subdivisional Lines of T. 20 S., R. 15 E

Beginning at true point for the cor. of secs. 21, 22, 27 and 28, the witness cor. bears N. $0^{\circ} 01' W.$ 6.75 chs. dist., monumented with a $2\frac{1}{2}$ in. iron post, set, mkd. and witnessed as described in the official record.

N. $0^{\circ} 01' W.$ bet. sections 21 and 22.

Over mountainous land through scattered timber.

From the true point, asc. about 200 ft. over near vertical ledges on S. slope. Also top of rim bears E. and W.

6.75 The witness cor. of secs. 21, 22, 27 and 28, asc. 30 ft. over S. slope.

8.00 Ridge, bears E. and W., desc. 140 ft. over rocky N. slope. Enter scattered timber.

20.60 Wash, drains E., asc. 85 ft. over rocky SE. slope.

36.40 Top of ascent slopes E., desc. 65 ft. over rocky NE. slope.

40.00 Point for the $\frac{1}{2}$ sec. cor. of secs. 21 and 22.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 4 ins. in the ground and in a mound of stone 4 ft. base, to top, with brass cap mkd.

T20S R15E

$\frac{1}{2}$
S21 | S22
1961

Continue descent.

48.00 Wash, 15 lks. wide, 2 ft. deep, drains S. $30^{\circ} E.$, asc. abruptly 275 ft. over sandstone ledges on broken SW. slope.

54.00 Top of ledge, 60 ft. high, bears N. $80^{\circ} W.$, and S. $40^{\circ} E.$, thence asc. 160 ft. over gentle S. slope.

74.30 Spur, projects N. $80^{\circ} W.$, desc. 120 ft. over rocky N. slope.

80.00 Point for the cor. of secs. 15, 16, 21 and 22.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., on solid sandstone and in a mound of stone 4 ft. base, to top, with brass cap mkd.

T20S R15E

S16 | S15
S21 | S22
1960

Land, broken S. portion; gently rolling N. portion.
Soil, rocky, sandy clay, exposed sandstone.
Timber, scattered scrub pinon and juniper.

N. $0^{\circ} 01' W.$ bet. secs. 15 and 16.

Survey of a Portion of the Subdivisional Lines of T. 20 S., R. 15 E.

Chains

Over broken land through scattered timber; desc. 100 ft. over gentle N. slope.

19.50 Rim of cove, ledge, bears NE. and SW., by triangulation, desc. about 500 ft. over abrupt, ledgy NW. slope. Topography approximated. Leave timber.

38.50 Bottom of descent, drains E., asc. 10 ft. over SE. slope to $\frac{1}{4}$ cor.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 15 and 16.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 4 ins. in the ground and in a mound of stone, 4 ft. base, to top, with brass cap mkd.

T20S R15E

$\frac{1}{4}$
 S16 | S15
 1961

End one triangulation, beginning of another, asc. about 500 ft. over broken, solid sandstone ledges on SW. slope.

68.00 Rim of cove, narrow sandstone finger about 80 lks. wide, projects S. 80° E., end triangulation, thence by triangulation, desc. abruptly about 400 ft. over solid sandstone ledges on NE. slope.

80.00 Point for the cor. of secs. 9, 10, 15 and 16.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam. 4 ins. in the ground and in a mound of stone 4 ft. base, to top, with brass cap mkd.

T20S R15E

S 9 | S10
 S16 | S15
 1961

End triangulation.

Land, mountainous, broken.

Soil, shallow, rocky sandy loam.

Timber, scattered pinon and juniper S. portion; none N. portion.

N. $0^\circ 01'$ W. bet. secs. 9 and 10.

Over broken land.

By triangulation, desc. about 150 ft. over NE. slope. Topography approximated.

3.00 Approximate dist. to draw, drains NE., asc. about 100 ft. over SE. slope.

12.00 Approximate dist. to spur, projects NE., desc. about 300 ft. over broken NW. slope.

35.00 Approximate dist. to draw, drains NE., asc. about 100 ft. over ledgy SE. slope.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 9 and 10.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins. in the ground and in a mound of stone 4 ft. base, to top, with brass cap mkd.

Survey of Portion of the Subdivisional Lines of T. 20 S. R. 15 E.

Chains

T20S R15E

1/2
S9 | S10
1961

End triangulation; continue ascent.

- 43.40 Ledge, 60 ft. high, bears NE. and SW.
- 46.30 Spur, projects NE., thence by triangulation, desc. about 600 ft. over broken, ledgy N. slope.
- 80.00 Point for the cor. of secs. 3, 4, 9 and 10.

Set an iron post 30 ins. long, 2 1/2 ins. diam., 20 ins. in the ground and in a collar of stone, with brass cap mkd.

T20S R15E

S4 | S 3
S9 | S10
1961

Cor. falls on small sandy bench, about 1.00 ch. S. of wash.

Land, broken.
Soil, rocky, sandy loam.
No timber.

N. 0° 01' W. bet. secs. 3 and 4.

Over broken land.

By triangulation, topography approximated.

- 1.00 Approximate dist. to wash, in Blue Castle Canyon, drains irregularly SE., asc. about 1,200 ft. over solid sandstone ledges on broken SE. slope.
- 40.00 Point for the 1/2 sec. cor. of secs. 3 and 4 falls on inaccessible ledges and cannot be monumented.
- 52.50 Rim of mesa, ledge, bears NE. and SW. End triangulation. Enter scattered timber.
- 53.13 Point selected for the witness 1/2 sec. cor. of secs. 3 and 4.

Set an iron post 30 ins. long, 2 1/2 ins. diam., on solid sandstone and in a mound of stone 4 1/2 ft. base, to top, with brass cap mkd.

T20S R15E

1/2
S4 | S3
↓
W C
1961

Asc. 55 ft. over gentle SE. slope.

- 69.30 Top of ascent bears, NE. and SW., desc. 45 ft. over gentle NW. slope.
 - 82.23 Intersect the N. bdy. of the Tp.
- Point for the closing cor. of secs. 3 and 4.

Set an iron post 30 ins. long, 2 1/2 ins. diam., on solid sandstone and in a mound of stone 4 ft. base, to top, with brass cap mkd.

Survey of a Portion of the Subdivisional Lines of T. 20 S., R. 15 E.

Chains

S33

S4 83

O.C.

T20S R15E.

1961

From this cor. the cor. of secs. 33 and 34, T. 19 S., R. 15 E., bears east 1.70 chs. dist., monumented with a 2 in. iron post, set, mkd. and witnessed as described in the official record.

Land, mountainous, broken.

Soil, rocky, sandy clay.

Timber, scattered pinon and juniper N. portion; none S. portion.

From the cor. of secs. 15, 16, 21 and 22.

West, bet. secs. 16 and 21.

Over rolling land through scattered timber.

- 0.50 Wash, 10 lks. wide, 1 ft. deep, drains NW., asc. 30 ft. over gentle NE. slope.
- 8.30 Spur, projects N., desc. 25 ft. over gentle NW. slope.
- 13.40 Wash, 10 lks. wide, 1 ft. deep, drains N., asc. 100 ft. over gentle NE. slope.
- 26.60 Rim of Book Cliffs, bears irregularly N. and S., thence by triangulation, desc. about 1,400 ft. over series of sandstone ledges 50 ft. to 150 ft. high, on W. slope. Topography approximated.
- 37.95 Point selected for the witness $\frac{1}{4}$ sec. cor. of secs. 16 and 21.
- Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 8 ins. in the ground and in a mound of stone $3\frac{1}{2}$ ft. base, to top, with brass cap mkd.
- T20S R15E
W S16
 $\frac{1}{4}$ ← C S21
1961
- End triangulation. Cor. set at base of ledge about 150 ft. high, on broken W. slope. Thence by triangulation, continue descent. Topography approximated.
- 40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 16 and 21 falls on steep clay slope where cor. cannot be perpetuated.
- 53.00 Approximate dist. to wash, 20 lks. wide, 3 ft. deep, drains S. 80° W., asc. about 100 ft. over rocky SE. slope.
- 60.00 Approximate dist. to spur, projects S. 70° W., desc. about 50 ft. over rocky NW. slope.
- 72.00 Approximate dist. to wash, 20 lks. wide, 3 ft. deep, drains SW., asc. about 80 ft. over steep, rocky SE. slope.
- 78.00 Spur, projects S.; end triangulation, thence desc. 75 ft. over steep clay slope.

ortion of the Subdivisional Lines of T. 20 S. R. 15 E.

CHAINS

80.00 Point for the cor. of secs. 16, 17, 20 and 21 falls in Wash, 30 lks. wide, 4 ft. deep, drains S., and cannot be perpetuated.

Therefore, at a point 0.61 chs. west, set an iron post 30 ins. long, 2½ ins. diam., 22 ins. in the ground and in a collar of stone, with brass cap mkd.

T20S R15E
 $\frac{S17}{S20} | \frac{S16}{S21} \rightarrow$ W
 C
 1961

Land, rolling, E. portion; broken W. portion.

Soil, sandy clay E. portion; clay W. portion.

Timber, scattered pinon and juniper E. portion; none W. portion.

From true point for cor. of secs. 16, 17, 20 and 21.

N. 0° 02' W. bet. secs. 16 and 17.

By triangulation, asc. about 1,400 ft. over broken sandstone ledges on S. slope.

40.00 Point for the ¼ sec. cor. of secs. 16 and 17 falls on inaccessible ledges and cannot be monumented.

50.50 Top of ledge, about 200 ft. high, bears irregularly E. and W. End triangulation.

50.61 Point selected for the witness ¼ sec. cor. of secs. 16 and 17.

Set an iron post 30 ins. long, 2½ ins. diam., on solid sandstone and in a mound of stone 4 ft. base, to top, with brass cap mkd.

T20S R15E
 $\frac{S17}{S16}$
 \downarrow
 W C
 1961

Continue ascent over ledgy S. slope.

59.70 Ridge, bears E. and W., thence by triangulation, desc. about 300 ft. over broken, ledgy NW. slope. Topography approximated. Enter scattered timber.

68.00 Approximate dist. to bottom of steep descent, thence desc. about 100 ft. over gentle N. slope.

80.00 Point for the cor. of secs. 16, 17, 8 and 9.

Set an iron post 30 ins. long, 2½ ins. diam., 8 ins. in the ground and in a mound of stone 4 ft. base, to top, with brass cap mkd.

T20S R15E
 $\frac{S 8}{S17} | \frac{S 9}{S16}$
 1961

Land, broken,

Soil, rocky, sandy clay, exposed sandstone.

No timber S. portion; scattered pinon and juniper N. portion.

Survey of a Portion of the Subdivisional Lines of T. 20 S., R. 15 E.

Chains

From the cor. of secs. 9, 10, 15 and 16.

S. 89° 56' W. bet. secs. 9 and 16.

Over broken land through scattered timber.

By triangulation, asc. about 400 ft. over broken, ledgy NE. slope.

12.00 Rim of cove, bears NW. and SE.; end triangulation, thence over rolling land through scattered timber, asc. 30 ft. over gentle, rocky NE. slope.

18.20 Top of ascent bears, NW. and SE., desc. 45 ft. over gentle, rocky SW. slope.

35.20 Wash, drains SE., asc. 40 ft. over gentle NE. slope.

40.02 Point for the $\frac{1}{4}$ sec. cor. of secs. 9 and 16.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 4 ins. in the ground and in a mound of stone 4 ft. base, to top, with brass cap mkd.

$$\begin{array}{r} \text{T20S R15E} \\ \text{S 9} \\ \hline \frac{1}{4} \text{ S16} \\ \text{1961} \end{array}$$

Continue ascent.

53.70 Top of ascent bears NW. and SE., desc. 70 ft. over gentle SW. slope.

64.80 Wash, 40 ft. deep, drains SE., asc. 150 ft. along N. slope.

80.04 The cor. of secs. 8, 9, 16 and 17.

Land, broken E. portion; rolling W. portion.

Soil, rocky, sandy clay.

No timber E. portion; scattered pinon and juniper W. portion.

General Description

This portion of the township is located on the Beckwith Plateau in the Book Cliffs, and is mountainous, broken land, covered with scrub pinon and juniper timber. There are no roads or water in this portion. The general elevation is 6,000 ft. above sea level. The soil is rocky sandy clay with considerable exposed sandstone, except the extreme southeast cor. of section 16, and is clay in that portion. The area is drained in a south easterly direction by numerous draws and washes.



CERTIFICATE OF CADASTRAL ENGINEER

We, X Fred R. Chappell, Glen B. Hatch and Craig P. Sylvester, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 20th day of May, 1954, I have surveyed A Portion of the Subdivisional Lines of Township 20 South, Range 15 East.

of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by me and under our direction; and that said survey has been made in strict conformity with said instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in the specific manner described in the foregoing field notes.

Salt Lake City, Utah
February 15, 1962

Craig P. Sylvester
Craig P. Sylvester, Cadastral Surveyor

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT,
Washington, D. C., MAY 6 1963, 19

The foregoing field notes of the survey of A Portion of the Subdivisional Lines of Township 20 South, Range 15 East, Salt Lake Meridian, Utah.

executed by Fred R. Chappell, Glen B. Hatch - Cadastral Surveyors, under the supervision of Craig P. Sylvester - Cadastral Surveyor having been critically examined and found correct, are hereby approved.

E. J. Pennington
Cadastral Engineering Staff Officer
Chief, Division of Engineering

CERTIFICATE OF TRANSCRIPT

I CERTIFY that the foregoing transcript of the field notes of the above-described surveys in is a true copy of the original field notes.

Cadastral Engineering Staff Officer.

DEPT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

457

OCT 29 3 14 PM 1962

ORIGINAL

RECEIVED
STATE OF UTAH
COUNTY OF KANE

FIELD NOTES

OF THE

DEPENDENT RESURVEY OF A PORTION OF THE NORTH BOUNDARY

AND A PORTION OF THE SUBDIVISIONAL LINES

AND THE SURVEY OF

THE EAST-WEST CENTER LINE OF SECTIONS 4 AND 5

AND A PORTION OF THE SUBDIVISION OF SECTIONS 7 AND 18

OF

TOWNSHIP 27 SOUTH, RANGE 25 EAST

Of the SALT LAKE Meridian,

the State of UTAH

EXECUTED BY

Allen L. Tuft, Cadastral Surveyor

Under special instructions dated May 9 , 19 62. , which provided

for the surveys included under Group No. 457 , approved May 14, 1962

and assignment instructions dated June 6 , 19 62

Survey commenced June 18 , 19 62

Survey completed July 18 , 19 62

INDEX DIAGRAM

Township 27 South, Range 25 East
 4 3 2

| | | | | | | | |
|----|----|----|----|----|----|----|----|
| 17 | 18 | 8 | 18 | 6 | 3 | 2 | 1 |
| 16 | 16 | 7 | | | | | |
| 23 | 21 | | | 5 | | | |
| | 22 | 14 | 8 | 9 | 10 | 11 | 12 |
| | 13 | | | | | | |
| 21 | 19 | | | | | | |
| | 20 | 12 | 17 | 16 | 15 | 14 | 13 |
| | 11 | | 10 | | | | |
| | 9 | | | | | | |
| 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 |
| 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 |
| 31 | 32 | 33 | 34 | 35 | 36 | 37 | 38 |

Township 27' South, Range 25 East

Chains

The north boundary was surveyed by E. Buettner in 1880. In 1922, Andrew Nelson made a limited retracement of this boundary. The south boundary was surveyed by E. Buettner in 1880. In 1915, T. C. Rathbone retraced this boundary and established closing corners for T. 28 S., R. 25 E. on this line.

The east boundary (Colorado Meridian) was surveyed by F. Dickert in 1878 and was resurveyed by E. Buettner in 1880. The west boundary was surveyed by E. Buettner in 1880, and was resurveyed by Andrew Nelson in 1922. Closing corners for T. 27 S., R. 24 E. were established on this line in 1934 by C. F. Moore, S. Reese and K. Vincent.

The subdivisional lines were surveyed by E. Buettner in 1880. A limited retracement of the subdivision was made in 1922 by Andrew Nelson.

The following field notes are those of the dependent resurvey of a portion of the north boundary, a portion of the subdivisional lines, and the survey of a portion of the subdivision of sections 4, 5, 7 and 18, T. 27 S., R. 25 E.

Before restoring the corners, the lines of the original survey were retraced and diligent search made for any evidence of the original corners, bearing trees and other calls of the original field note record. The rules of proportionate measurement were applied to ascertain the position of lost corners, but not until exhausting every reasonable possibility of finding direct evidence for the control of each particular corner.

The costs of the field and office work incurred in the execution of the resurveys and surveys herein described are payable in accordance with a memorandum of understanding between the United States Forest Service and the Bureau of Land Management dated February 26, 1962.

The survey was executed with a W. & L. E. Gurley solar transit No. 600539, constructed in accordance with the standard instrumental specifications of the Bureau of Land Management. The instrument was in good condition prior to the beginning of the survey and was maintained in proper adjustment throughout the progress of this survey.

Corners on east-west lines were set on the true latitudinal curve. Lines connecting previously established corners were run by random and true method, but for simplification of the record the random lines are omitted from the field notes.

Measurements herein contained were made with a narrow steel tape, eight chains in length, graduated every link for the first 100 links and thereafter at intervals of 10 links. The tape was tested by comparison with a one chain standard steel tape and found to be correct. Measurements were made on the slope with the vertical angle of each interval ascertained by a clinometer in good adjustment; horizontal equivalents alone are entered in the field notes. All lines of this survey were run by direct method where the lines were accessible; lines inaccessible were run by traverse or triangulation methods. Distances to topography on lines run by traverse or triangulation are approximately as scaled from U.S.G.S. topographic sheet "LaSal Quadrangle." The details of such traverses or triangulations have been thoroughly checked and verified, and in order to simplify the record the diagrams and reductions are omitted from these field notes.

The direction of the lines of this survey were determined by reference to true meridians established on line by altitude observations on the sun. The lines were carried forward by sustained angulation being supplemented by other numerous altitude observations on the sun taken throughout the progress of the survey.

The geographic position for the southeast corner of section 17 is at latitude $38^{\circ} 26' 57''$ N. and longitude $109^{\circ} 10' 35''$ W. as scaled

Township 27 South, Range 25 East

Chains

from U.S.G.S. quadrangle sheet LaSal, Utah-Codorado.

The magnetic declination was read at a number of stations throughout the township and the average of these readings was found to be 15° East.

Dependent Resurvey of Portion of the North Bdy., T. 27 S., R. 25 E.

Reestablishment of the survey executed by E. Buettner, U. S. Deputy Surveyor, and the retracement executed by Andrew Nelson, U. S. Cadastral Engineer in 1922.

The cor. of secs. 3, 4, 33 and 34, determined by the intersection of old fences from the S. and from the E.; and is accepted as a perpetuation of the original cor. point.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground, in a mound of stone, 3 ft. base to top, with brass cap mkd.

T26S R25E
S33 | S34
 S4 | S3
 T27S
 1962

from which

An aspen, 8 ins. diam., bears N. 57° 45' E., 56 lks. dist., mkd.
 T26S R25E S34 BT.

An aspen, 8 ins. diam., bears S. 84° 15' E., 39.5 lks. dist., mkd.
 T27S R25E S3 BT.

An aspen, 6 ins. diam., bears S. 47° 45' W., 47 lks. dist., mkd.
 T27S R25E S4 BT.

An aspen, 5 ins. diam., bears N. 60° 00' W., 36 lks. dist., mkd.
 T26S R25E S33 BT.

S. 89° 40' W., bet. secs. 4 and 33.

Over mountainous land, through dense timber.

Asc. 310 ft. over rocky NE. slope.

3.85 Leave aspen timber, enter dense fir and spruce.

38.80 Top of ascent slopes N., desc. 10 ft. along gentle N. slope.

39.79 Pt. for the ¼ sec. cor. of secs. 4 and 33, at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground in a collar of stone to top, with brass cap mkd.

T26S R25E
 ¼ S33
 S 4
 T27S
 1962

from which

Dependent Resurvey of Portion of the North Bdy., T. 27 S., R. 25 E.

Chains

A fir, 8 ins. diam., bears N. 43° 15' E., 9 lks. dist., mkd. $\frac{1}{4}$ S33 BT.

A fir, 7 ins. diam., bears S. 17° 30' E., 38 lks. dist., mkd. $\frac{1}{4}$ S4 BT.

45.00 Wash, 50 lks. wide, 15 ft. deep, drains N. 80° E.; asc. 415 ft. over rocky SE. slope.

75.10 Fence, old barbed wire, bears N. and S.

79.58 Pt. for the cor. of secs. 4, 5, 32 and 33 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground in a mound of stone, 4 ft. base to top, with brass cap mkd.

T26S R25E
 $\frac{1}{4}$ S32 | S33
 S5 | S4
 T27S
 1962

from which

An aspen, 6 ins. diam., bears N. 21° 30' E., 60 lks. dist., mkd. T26S R25E S33 BT.

An aspen, 6 ins. diam., bears S. 40° 15' E., 108 lks. dist., mkd. T27S R25E S4 BT.

A fir, 7 ins. diam., bears N. 20° W., 45 lks. dist., mkd. T26S R25E S32 BT.

Land, mountainous.

Soil, rocky loam.

Timber, dense fir, spruce and scattered patches of dense aspen.

Undergrowth, bunch grass.

S. 89° 40' W., bet. secs. 5 and 32.

Over mountainous land, through dense timber.

Asc. 50 ft. over steep SE. slope.

9.50 Leave dense aspen, bears irregularly N. and S.; enter bunch grass; asc. 375 ft. over SE. slope.

25.65 Leave bunch grass, enter rock outcroppings; asc. 55 ft. over broken SE. slope.

28.50 Leave rock outcroppings; asc. 25 ft. over SE. slope.

31.80 Rocky spur, slopes S.; desc. 60 ft. over SW. slope.

39.79 Pt. for the $\frac{1}{4}$ sec. cor. of secs. 5 and 32 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground to bedrock, in a mound of stone, 3 ft. base to top, with brass cap mkd.

T26S R25E
 $\frac{1}{4}$ S32
 S5
 T27S
 1962

Dependent Resurvey of Portion of the North Bdy., T. 27 S., R. 25 E.

Chains

- Desc. 125 ft. over SW. slope.
- 46.30 Enter medium dense aspen, bears irregularly NE. and SW.; desc. 255 ft. over SW. slope.
- 60.40 Leave timber, bears NE. and SW.; enter slide rock; desc. 95 ft. over SW. slope.
- 61.80 Leave slide rock, enter med. dense timber.
- 65.60 Leave timber, enter slide rock.
- 67.65 Leave slide rock, enter med. dense timber; desc. 40 ft. over SW. slope.
- 72.35 Wash, drains S.; asc. 150 ft. over steep E. slope.
- 79.58 Pt. for the cor. of secs. 5, 6, 31 and 32 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 12 ins. in the ground in a mound of stone, 3 ft. base to top, with brass cap mkd.

T26S R25E
S31 | S32
 S6 | S5
 T27S
 1962

from which

- A fir, 8 ins. diam., bears N. 39° E., 23 lks. dist., mkd. T26S R25E S32 BT.
- A fir, 8 ins. diam., bears S. 18° E., 52 lks. dist., mkd. T27S R25E S5 BT.
- A fir, 6 ins. diam., bears S. 67° W., 7 lks. dist., mkd. T27S R25E S6 BT.
- A fir, 6 ins. diam., bears N. 32° W., 24 lks. dist., mkd. T26S R25E S31 BT.

Land, mountainous.

Soil, rocky loam.

Timber, medium dense aspen, fir and spruce.

Undergrowth, bunch grass.

S. $89^\circ 40'$ W., bet. secs. 6 and 31.

Over mountainous land, through dense timber.

Asc. 70 ft. over steep E. slope.

- 1.60 Slope changes to N.; asc. 60 ft. along N. slope.
- 7.75 Ridge, bears irregularly NE. and SW.; desc. 305 ft. over rocky W. slope.
- 18.50 Leave timber, bears NE. and SW.
- 22.75 Edge of small patch of aspen timber.
- 23.80 Spring branch, 35 lks. wide, 10 ft. deep, with small stream of water, drains SW.; asc. 270 ft. over SE. slope.
- 37.80 Wash, drains SE.

Dependent Resurvey of Portion of the North Bdy., T. 27 S., R. 25 E.

Chains

39.79

The 1/4 sec. cor. of secs. 6 and 31, monumented with a gray sandstone, 8x10x12 ins., set, mkd. and witnessed as described in the official record of the 1880 survey.

At the cor. pt.

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 10 ins. in the ground in a mound of stone, 3 ft. base to top, with brass cap mkd.

T26S R25E
1/4 S31
S 6
T27S
1962

Bury orig. stone cor. alongside iron post.

Dependent Resurvey, Portion of Subdivisional Lines, T. 27 S., R. 25 E.

Reestablishment of the survey executed by E. Buettner, Deputy Surveyor, in 1880, and the retracement of Andrew Nelson, U. S. Cadastral Engineer, in 1922.

The 1/4 sec. cor. of secs. 9 and 10, monumented with a gray sandstone, 8x10x14 ins., firmly set, dimly mkd. and witnessed as described in the official record.

At the cor. pt.

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 18 ins. in the ground in a mound of stone, 3 ft. base to top, with brass cap mkd.

T27S R25E
1/4
S 9 | S10
1962

from which

An aspen, 8 ins. diam., bears S. 79° 30' E., 35 lks. dist., mkd. 1/4 S10 BT.

An aspen, 5 ins. diam., bears N. 67° W., 5 lks. dist., mkd. 1/4 S9 BT.

N. 0°42' W., bet. secs. 9 and 10.

Over mountainous land, through scattered oak brush.

Asc. 225 ft. over S. slope.

22.50

Enter medium dense aspen, bears NW. and SE.; asc. 55 ft. over S. slope.

35.90

Leave aspen, bears NE. and SW.; desc. 5 ft. over gentle NE. slope.

39.76

Pt. for the cor. of secs. 3, 4, 9 and 10 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, with brass cap mkd.

Dependent Resurvey, Portion of Subdivisional Lines, T. 27 S., R. 25 E.

Chains

T27S R25E
 $\frac{S4}{S9} | \frac{S3}{S10}$
 1962

from which

An aspen, 7 ins. diam., bears N. 54° 15' E., .99 lks. dist., mkd.
 T27S R25E S3 BT.

An aspen, 10 ins. diam., bears S. 53° E., 105 lks. dist., mkd.
 T27S R25E S10 BT.

An aspen, 12 ins. diam., bears S. 62° 30' W., 42 lks. dist., mkd.
 T27S R25E S9 BT.

An aspen, 8 ins. diam., bears N. 73° W., 35 lks. dist., mkd.
 T27S R25E S4 BT.

Raise a mound of stone, 3 ft. base, 1½ ft. high. W. of cor.

From this cor., an old log fence, bearing N. and S. bears E. 39.45 chs. dist. and is used for E-W control in establishing lost corners to the W.

Land, mountainous.

Soil, rocky loam.

Timber, scattered to medium dense aspen.

Undergrowth, scattered oak brush.

N. 0° 30' E., bet. secs. 3 and 4.

Over mountainous land, through scattered timber.

Asc. 30 ft. along E. slope.

2.90 Road, unimproved dirt, from Geyser Pass to Buckeye Reservoir, bears irregularly E. and W.

6.10 Old log fence, bears E. and W.

12.75 Enter dense aspen, bears SE. and W.; asc. 495 ft. over S. slope.

39.76 Pt. for the ¼ sec. cor. of secs. 3 and 4 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, in a mound of stone, 3 ft. base to top, with brass cap mkd.

T27S R25E
 $\frac{1}{4}$
 $\frac{S4}{S4} | \frac{S3}{S3}$
 1962

from which

An aspen, 8 ins. diam., bears S. 41° E., 7 lks. dist., mkd. ¼ S3 BT.

An aspen, 6 ins. diam., bears N. 72° W., 18 lks. dist., mkd. ¼ S4 BT

40.40 Forest Service marker, bears E. 1.21 chs. dist.; asc. 95 ft. over SE slope.

45.40 Spur, slopes E.

45.42 Forest Service marker bears E. .88 chs. dist.; desc. 180 ft. over NE slope.

47.30 Enter as en and s ruwe.

Dependent Resurvey, Portion of Subdivisional Lines, T. 27 S., R. 25 E.

| Chains | |
|---------|---|
| 54.35 | End of old log fence, bears E. .22 chs. dist.; desc. 120 ft. over NE. slope. |
| 63.50 | Draw, drains NE.; asc. 40 ft. over SE. slope. |
| 68.50 | Spur, slopes NE.; desc. 100 ft. over NE. slope. |
| 75.00 | Small draw, drains NE.; asc. 30 ft. over SE. slope. |
| 77.00 | Small spur, slopes NE.; desc. 20 ft. over NE. slope. |
| 79.62 = | <p>The cor. of secs. 3, 4, 33 and 34 on the N. bdy. of the Tp., hereinbefore described.</p> <p>Land, mountainous. Soil, rocky loam. Timber, scattered aspen S. portion, dense aspen and spruce N. portion. Undergrowth, bunch grass.</p> |
| 1.70 | <p>From the cor. of secs. 3, 4, 9 and 10.</p> <p>S. 89° 30' W., bet. secs. 4 and 9.</p> <p>Over mountainous land, through scattered aspen.</p> <p>Asc. 15 ft. along N. slope.</p> <p>Top of ascent, bears irregularly E. and W.; desc. 55 ft. over SW. slope.</p> |
| 4.60 | Leave timber, bears N. and S.; enter open meadow. |
| 17.65 | Enter dense aspen, bears N. and S.; asc. 75 ft. along S. slope. |
| 28.15 | Wash, with small stream of water, flows S. 80° E.; asc. 50 ft. over NE. slope. |
| 29.25 | Leave dense aspen, enter dense oak brush and scattered patches of aspen. |
| 35.10 | Spur, slopes SE.; desc. 35 ft. over SW. slope. |
| 39.75 | <p>Pt. for the $\frac{1}{2}$ sec. cor. of secs. 4 and 9, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 30 ins. long, 2$\frac{1}{2}$ ins. diam., 15 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.</p> |
| | <p>T27S R25E</p> $\frac{1}{2} \frac{S. 4}{S. 9}$ <p>1962</p> |
| | from which |
| | An aspen, 8 ins. diam., bears N. 45° 30' E., 10 lks. dist., mkd. $\frac{1}{2}$ S4 BT. |
| | An aspen, 7 ins. diam., bears S. 22° 45' E., 25 lks. dist., mkd. $\frac{1}{2}$ S9 BT. |
| | Desc. 10 ft. along S. slope. |
| 41.10 | Bottom of descent; asc. 80 ft. over SE. slope. |

Dependent Resurvey, Portion of Subdivisional Lines, T. 27 S., R. 25 E.

Chains

55.00

Top of ascent, leave oak brush, enter dense aspen; desc. 13 ft. along S. slope.

57.95

Bottom of descent; asc. 105 ft. along S. slope.

72.00

Top of ascent; desc. 30 ft. along gentle S. slope.

79.50

The cor. of secs. 4, 5, 8 and 9, determined from the original bearing trees and small mound of stone.

An Aspen, 10 ins. diam., bears N. 16° 30' E., 48 lks. dist., dimly mkd.

An aspen, 10 ins. diam., bears S. 59° E., 47 lks. dist., dimly mkd.

An aspen, 9 ins. diam., bears N. 55° E., 75 lks. dist., dimly mkd.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 14 ins. in the ground, in a mound of stone, 3 ft. base to top, with brass cap mkd.

T27S R25E

| | |
|-----|-----|
| S 5 | S 4 |
| S 8 | S 9 |

1962

from which,

An aspen, 8 ins. diam., bears N. 18° 30' E., 19 lks. dist., mkd. T27S R25E S4 BT.

An aspen, 8 ins. diam., bears S. 35° 15' E., 29 lks. dist., mkd. T27S R25E S9 BT.

An aspen, 5 ins. diam., bears S. 61° W., 6 lks. dist., mkd. T27S R25E S8 BT.

An aspen, 6 ins. diam., bears N. 4° 15' W., 30 lks. dist., mkd. T27S R25E S5 BT.

Cor. located on small bench, 10 lks. N. of edge, sloping sharply S.

Land, mountainous.

Soil, rocky loam.

Timber, dense patches of aspen.

Undergrowth, dense oak brush.

N. 0° 17' E., bet. secs. 4 and 5.

Over mountainous land, through dense aspen.

Asc. 100 ft. over S. slope.

15.90

Road, unimproved dirt, from Geyser Pass to Buckeye Reservoir, bears N. 80° W. and S. 80° E.; asc. 720 ft. over steep, rocky S. slope.

39.70

Pt. for the ¼ sec. cor. of secs. 4 and 5 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground, in a mound of stone, 3 ft. base to top, with brass cap mkd.

Dependent Resurvey of Portion of Subdivision Lines, T. 27 S., R. 25 E.

Chains

T27S R25E

$\frac{1}{4}$
S5|S4
1962

from which

An aspen, 6 ins. diam., bears S. 60° E., 3 lks. dist., mkd. $\frac{1}{4}$ S4 BT.

An aspen, 5 ins. diam., bears N. 47° 30' W., 61 lks. dist., mkd. $\frac{1}{4}$ S5 BT.

Asc. 330 ft. over steep, rocky S. slope.

52.20 Enter dense spruce and fir, leave aspen.

54.35 Ridge, bears E. and W.; desc. 370 ft. over steep, rocky NE. slope.

57.15 Center of rock slide, 2.50 chs. wide.

77.00 Draw, drains E.; asc. 20 ft. over SE. slope.

78.30 Leave timber, enter meadow land.

79.79 The cor. of secs. 4, 5, 32 and 33, on the N. bdy. of the Tp., hereinbefore described.

Land, mountainous.

Soil, rocky loam.

Timber, dense aspen S. portion; dense fir and spruce N. portion.

Undergrowth, grass.

The $\frac{1}{4}$ sec. cor. of secs. 19 and 20, determined from the original bearing trees:

An aspen, 12 ins. diam., bears N. 12° E., 32 lks. dist., mkd. $\frac{1}{4}$ S BT.

An aspen, 7 ins. diam., bears S. 20 E., 25 lks. dist., mkd. $\frac{1}{4}$ S BT.

At the cor. pt.

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 20 ins. in the ground, in a mound of stone, 3 ft. base to top, with brass cap mkd.

T27S R25E

$\frac{1}{4}$
S19|S20
1962

from which

An aspen, 8 ins. diam., bears S. 42° E., 13 lks. dist., mkd. $\frac{1}{4}$ S20 BT.

An aspen, 10 ins. diam., bears N. 46° W., 9 lks. dist., mkd. $\frac{1}{4}$ S19 BT.

N. 0° 13' E., bet. secs. 19 and 20.

Over mountainous land, through med. dense aspen, spruce and fir.

Desc. 10 ft. along E. slope.

5.20 Road, unimproved dirt, bears N. 55° W. and S. 45° E.

8.15 Road, unimproved dirt, bears N. 75° E. and S. 80° W.; asc. 340 ft. over rocky SE. slope.

Dependent Reserve, Portion of Subdivisions Lines T.

Chains

cont'd

- 19.80 Asc. 60 ft. along E. slope.
- 24.65 Leave timber, enter small meadow.
- 32.60 Leave meadow, enter dense timber; desc. 25 ft. along E. slope.
- 39.93 Pt. for the cor. of secs. 17, 18, 19 and 20, at proportionate dist.; there is no remaining evidence of the original cor.
- Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in rock slide, in a mound of stone, 5 ft. base to top, with brass cap mkd.

T27S R25E
 S18|S17
 S19|S20
 1962

from which

An aspen, 8 ins. diam., bears N. 70° E., 35 lks. dist., mkd. T27S R25 E S17 BT.

An aspen, 6 ins. diam., bears S. 50° W., 57 lks. dist., mkd. T27S R25E S19 BT.

Land, mountainous.

Soil, rocky loam.

Timber, medium dense aspen, fir and spruce.

Undergrowth, bunch grass.

The cor. of secs. 16, 17, 20 and 21, monumented with a sandstone, 4x20x20 ins., loosely set, dimly mkd., and witnessed as described in the official record.

At the cor. pt.

Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground, in a mound of stone, 3 ft. base to top, with brass cap mkd.

T27S R25E
 S17|S16
 S20|S21
 1962

from which

An aspen, 4 ins. diam., bears N. 46° E., 23 lks. dist., mkd. T27S R25E S16 BT.

An aspen, 8 ins. diam., bears S. 35° E., 98 lks. dist., mkd. T27S R25E S21 BT.

An aspen, 8 ins. diam., bears S. 36° W., 10 lks. dist., mkd. T27S R25E S20 BT.

Bury orig. stone cor. alongside iron post.

S. 89° 39' W., bet. secs. 17 and 20.

Over mountainous land, through med. dense aspen.

Asc. 30 ft. along S. slope.

Dependent Resurvey, Portion of Subdivisional Lines, T. 27 S., R. 25 E.

| Chains | |
|--|--|
| 17.15 | Spur, slopes SE.; desc. 20 ft. over SW. slope. |
| 22.85 | Spring branch, 2 lks. wide, 6 ins. deep, flows SE.; asc. 200 ft. over NE. slope. |
| 31.75 | Old pole fence, bears N. 30° E. and S. 30° W.; asc. 110 ft. over NE. slope. |
| 39.93 | Pt. for the $\frac{1}{4}$ sec. cor. of secs. 17 and 20, at proportionate dist.; there is no remaining evidence of the original cor. This pt. not monumented. Asc. 60 ft. over NE. slope. |
| 48.90 | Spur, slopes SE.; asc. 150 ft. over SE. slope. |
| 62.40 | Road, unimproved dirt, bears N. 65° E. and S. 70° W.; asc. 145 ft. over SE. slope. |
| 79.86 | The cor. of secs. 17, 18, 19 and 20. Land, mountainous. Soil, rocky loam. Timber, med. dense aspen. Undergrowth, bunch grass. |
| S. 89° 55' W., bet. secs. 18 and 19. | |
| Over mountainous land, through dense aspen, spruce and fir. | |
| Asc. 60 ft. over SE. slope. | |
| 1.45 | Center of rock slide, bears N. 80° E. and S. 80° W.; asc. 160 ft. over E. slope. |
| 3.25 | Enter dense timber, bears irregularly N. and S. |
| 16.80 | Road, unimproved dirt, from Dark Canyon Lake to LaSal, bears N. 75° E. and S. 15° W.; asc. 130 ft. over steep E. slope. |
| 20.90 | Road, unimproved dirt, bears N. 70° E. and S. 20° W.; asc. 260 ft. over steep, rocky E. slope. |
| 39.97 | Pt. for the $\frac{1}{4}$ sec. cor. of secs. 18 and 19, at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground, in a mound of stone, 3 ft. base to top, with brass cap mkd. |
| T27S R25E $\frac{1}{4}$ <u>S18</u> S19 1962 | |
| from which | |
| A spruce, 3 ins. diam., bears N. 63° E., 7 lks. dist., mkd. $\frac{1}{4}$ S18 BT. | |
| A spruce, 8 ins. diam., bears S. 47° W., 52 lks. dist., mkd. $\frac{1}{4}$ S19 BT. | |
| Asc. 40 ft. over E. slope. | |

| Chains | |
|--------|--|
| 40.80 | Ridge, bears NE. and SW.; asc. 30 ft. over NE. slope. |
| 48.95 | Top of ascent, slopes N.; desc. 80 ft. over NW. slope. |
| 56.90 | Head of ravine, drains N. 20° W.; desc. 130 ft. along steep N. slope. |
| 79.10 | The cor. of secs. 18 and 19, on the W. bdy. of the Tp.; monumented with a 2 in. iron post, set, mkd. and witnessed as described in the official record of the 1922 survey. |
| | Land, mountainous. Soil, rocky loam. Timber, dense spruce, fir and aspen. Undergrowth, bunch grass. |
| | From the cor. of secs. 17, 18, 19 and 20. |
| | N. 0° 30' E., bet. secs. 17 and 18. |
| | Over mountainous land, through dense aspen. |
| | Asc. 180 ft. over rocky SE. slope. |
| .20 | Leave rock slide, enter dense timber. |
| 19.20 | Road, unimproved dirt, from Dark Canyon Lake to La Sal, bears NE. and SW.; asc. 10 ft. over SE. slope. |
| 19.70 | Ridge, bears NE. and SW.; desc. 165 ft. over NW. slope. |
| 27.75 | Road, from Dark Canyon Lake to La Sal, bears N. 80° E. and S. 10° W.; desc. 90 ft. over NW. slope. |
| 34.90 | Wash, in bottom of Dark Canyon, drains NE.; asc. 15 ft. over gentle SE. slope. |
| 39.93 | Pt. for the $\frac{1}{4}$ sec. cor. of secs. 17 and 18, at proportionate dist.; there is no remaining evidence of the orig. cor. |
| | Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 16 ins. in the ground, in a mound of stone, 3 ft. base to top, with brass cap mkd. |
| | T27S R25E |
| | $\frac{1}{4}$ |
| | S18 S17 |
| | 1962 |
| | from which |
| | A fir, 8 ins. diam., bears S. 53° 30' E., 44 lks. dist., mkd. $\frac{1}{4}$ S17 BT. |
| | A fir, 8 ins. diam., bears S. 64° W., 30 lks. dist., mkd. $\frac{1}{4}$ S18 BT. |
| | Cor. is located about 2.00 chs. E. of Dark Canyon Lake. |
| | Desc. 25 ft. along gentle E. slope. |
| 45.46 | Old log fence, bears E. and W.; asc. 5 ft. over gentle SE. slope. |
| 47.00 | Small spur, slopes NE.; desc. 55 ft. over gentle NE. slope. |
| 51.80 | Road, unimproved dirt, from Dark Canyon Lake to Geyser Pass, bears NE. and SW. |
| 57.80 | Bottom of descent; asc. 25 ft. over gentle SE. slope. |

Dependent Resurvey, Portion of Subdivisional Lines, T. 27 S., R. 25 E.

Chains

- 60.65 Old fence, bears N., thence along fence line.
- 64.20 Old fence, bears S. 85° W.; cont. along fence line.
- 67.60 Small spur, slopes NE.; desc. 30 ft. along gentle E. slope.
- 79.86 Pt. for the cor. of secs. 7, 8, 17 and 18, at proportionate dist. latitudinally and longitudinally by old N. and S. property line fence.

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground, in a mound of stone, 3 ft. base to top, with brass cap mkd.

T27S R25E
 S7 | S8
 S18 | S17
 1962

from which

A fir, 6 ins. diam., bears N. 77° 15' E., 44 lks. dist., mkd. T27S R25E S8 BT.

A fir, 8 ins. diam., bears S. 61° E., 71 lks. dist., mkd. T27S R25E S17 BT.

A fir, 8 ins. diam., bears S. 39° W., 35 lks. dist., mkd. T27S R25E S18 BT.

A fir, 6 ins. diam., bears N. 13° W., 76 lks. dist., mkd. T27S R25E S7 BT.

Land, mountainous.
Soil, rocky loam.
Timber, dense aspen, spruce and fir.
Undergrowth, grass.

S. 89° 48' W., bet. secs. 7 and 18.

Over mountainous land, through dense timber.

Asc. 5 ft. over gentle E. slope.

2.70 Small spur, slopes NE.; asc. 20 ft. along N. slope.

10.00 Asc. 130 ft. over E. slope.

17.65 Leave spruce and fir, enter dense aspen.

24.95 Spur, slopes NE.; asc. 95 ft. over E. slope.

26.75 Leave aspen, enter fir and spruce, spring branch, 7 lks. wide, 2½ ft. deep, flows N. 70° E.

27.75 Same stream, flows N. 70° E.

29.55 Same stream, flows N. 70° E.

40.07 Pt. for the ¼ sec. cor. of secs. 7 and 18 at proportionate dist.; there is no remaining evidence of the orig. cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, in a mound of stone, 3 ft. base to top, with brass cap mkd.

T27S R25E
 S 7
 ¼ S18
 1962

Dependent Resurvey, Portion of Subdivisional Lines T. 27 S. R. 25 E

Chains

from which

An aspen, 8 ins. diam., bears N. 48° 30' W., 162 lks. dist., mkd.
 $\frac{1}{2}$ S7 BT.

An aspen, 8 ins. diam., bears S. 23° 45' W., 33 lks. dist., mkd.
 $\frac{1}{2}$ S18 BT.

A Forest Service bdy. marker, bears N. 65° 11' E., 2.02 chs. dist.

Asc. 235 Ft. over SE. slope.

54.00 Top of asc.; slopes S., thence along S. slope.

60.11 Pt. for the W 1/16 sec. cor. of secs. 7 and 18 at proportionate dist.

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T27S R25E
 W1/16 $\frac{S 7}{S18}$
 1962

from which

An aspen, 8 ins. diam., bears N. 67° 15' W., 37 lks. dist., mkd.
 W 1/16 S7 BT.

An aspen, 8 ins. diam., bears S. 35° W., 36 lks. dist., mkd.
 W 1/16 S18 BT.

A Forest Service bdy. marker, bears N. 74° 19' E., 1.51 chs. dist.

Desc. 25 ft. over SW. slope.

69.20 Draw, drains SE.; asc. 70 ft. over NE. slope, leave timber.

79.26 The cor. of secs. 7 and 18, on the W. bdy. of the Tp., monumented with a 2 in. iron post, set, mkd. and witnessed as described in the official record of the 1922 survey.

Land, mountainous.

Soil, rocky loam.

Timber, dense fir, spruce and aspen.

Undergrowth, grass.

From the cor. of secs. 7, 8, 17 and 18.

N. 0° 29' W., bet. secs. 7 and 8.

Over mountainous land, through dense timber.

Desc. 20 ft. over NE. slope, along old fence.

6.60 Spring branch, 2 lks. wide, 8 ins. deep, flows N. 70° E.; asc. 10 ft. over SE. slope.

10.25 Top of asc.; desc. 5 ft. over NE. slope.

12.30 Bottom of desc.; asc. 5 ft. over SE. slope.

14.75 Top of asc.; desc. 30 ft. over NE. slope.

Dependent Resurvey, Portion of Subdivisional Lines, T. 27 S., R. 25 E.

| Chains | |
|--------|--|
| 19.30 | Old fence, bears E.; asc. 25 ft. over SE. slope. |
| 25.55 | Spur, slopes NE. |
| 25.57 | Old aspen fence, bears N. 80° E. and S. 85° W.; desc. 195 ft. over N. slope, cont. along fence line. |
| 35.20 | Draw, with stream of water, 3 lks. wide, 1 ft. deep, flows NE.; asc. 20 ft. over SE. slope. |
| 37.55 | Top of asc.; thence along E. slope. |
| 39.93 | Pt. for the ¼ sec. cor. of secs. 7 and 8, at proportionate dist.; there is no remaining evidence of the original cor. |
| | Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. |
| | T27S R25E ¼ S7 S8 1962 |
| | from which |
| | An aspen, 4 ins. diam., bears S. 18° 45' E., 34 lks. dist., mkd. ¼ S8 BT. |
| | An aspen, 6 ins. diam., bears S. 74° W., 41 lks. dist., mkd. ¼ S7 BT. |
| | A N-S pole fence, bears W. 55 lks. dist. |
| | Deposit a stone, 14x16x20 ins. W. of cor. |
| | Desc. 25 ft. along E. slope, parallel to fence line. |
| 58.80 | Desc. 250 ft. over steep NE. slope. |
| 73.30 | Old pole fence, bears N. 80° W. and S. 80° E.; end of N-S fence; thence over nearly level bottom land of Geyser Creek. |
| 74.95 | Spring branch, 10 lks. wide, 2 ft. deep, flows N. 85° E. |
| 78.50 | Small beaver pond, 20 lks. wide, 2 ft. deep, with small stream draining N. 80° E. |
| 79.20 | Spring branch, 15 lks. wide, 6 ins. deep, flows E. |
| 79.78 | Pt. selected for the witness cor. of secs. 5, 6, 7 and 8. |
| | Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground, in a mound of stone, 3 ft. base to top, with brass cap mkd. |
| | T27S R25E W C <u>S6 S5</u> S7 S8 1962 |
| 79.86 | Pt. for the cor. of secs. 5, 6, 7 and 8, at proportionate dist. falls in Geyser Creek, 15 lks. wide, 1 ft. deep, flows S. 55° E. and is not monumented; there is no remaining evidence of the orig. cor. |
| | Land, mountainous. Soil, rocky loam. Timber, dense spruce, aspen and fir, Undergrowth, grass. |

Chains

From the cor. of secs. 4, 5, 8 and 9.

S. 89° 08' W., bet. secs. 5 and 8.

Over mountainous land, through dense timber, along S. slope.

.50 Spring branch, 2 lks. wide, 3 ins. deep, flows S. 80° E.

18.50 Spring branch, 3 lks. wide, 3 ins. deep, flows S.; asc. 85 ft. along S. slope.

37.25 Small spur, slopes SW.; desc. 5 ft. over gentle SW. slope.

39.50 Pt. for the 1/4 sec. cor. of secs. 5 and 8, at proportionate dist.; there is no remaining evidence of the orig. cor.

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, with brass cap mkd.

T27S R25E
 1/4 S 5
 S 8
 1962

from which

An aspen, 8 ins. diam., bears N. 77° E., 205 lks. dist., mkd. 1/4 S5 BT.

An aspen, 10 ins. diam., bears S. 0° 15' W., 156 lks. dist., mkd. 1/4 S8 BT.

Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.

Cor. is located in small meadow, on SE. edge of small beaver pond.

40.05 Center of small marshy hollow; asc. 125 ft. over SE. slope.

52.65 Spur, slopes SE.; desc. 125 ft. over SW. slope.

54.50 Leave dense aspen, enter medium oak brush.

59.60 Leave oak brush, enter medium dense aspen; desc. 90 ft. over SW. slope.

70.15 Road, unimproved dirt, bears N. 75° W. and S. 75° E.; thence over nearly level bottom land of Geyser Creek.

79.00 The true point for cor. of secs. 5, 6, 7 and 8.

Land, mountainous.
 Soil, rocky loam.
 Timber, dense aspen.
 Undergrowth, oak brush, grass and willows.

S. 89° 55' W., bet. secs. 6 and 7.

Over mountainous land, through dense timber.

.65 Spring branch, 15 lks. wide, 1 ft. deep, drains S. 75° E.; asc. 40 ft. over gentle NE. slope with scattered small beaver ponds and willows.

7.50 Small beaver pond, leave willows and asc. 210 ft. over steep NE. slope.

23.50 Fence, bears W.; asc. 95 ft. over NE. slope along fence line.

Dependent Resurvey, Portion of Subdivisional Lines, T. 27 S., R. 25 E.

| Chains | |
|--------|---|
| 33.00 | Asc. 90 ft. over E. slope. |
| 39.58 | <p>Pt. for the $\frac{1}{4}$ sec. cor. of secs. 6 and 7, at proportionate dist. and on E-W fence line; there is no remaining evidence of the orig. cor.</p> <p>Set an iron post, 30 ins. long, 2$\frac{1}{2}$ ins. diam., 20 ins. in the ground, in a mound of stone, 3 ft. base to top, with brass cap mkd.</p> <p style="text-align: center;">T27S R25E $\frac{1}{4}$ $\frac{S. 6}{S. 7}$ 1962</p> <p>from which,</p> <p>A fir, 5 ins. diam., bears N. 43° 15' E., 86 lks. dist., mkd. $\frac{1}{4}$ S6 BT.</p> <p>A fir, 4 ins. diam., bears S. 29° E., 33 lks. dist., mkd. $\frac{1}{4}$ S7 BT.</p> <p>Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.</p> <p>Asc. 170 ft. over E. slope and along fence line.</p> |
| 52.00 | Asc. 30 ft. along N. slope. |
| 66.60 | Draw, with stream of water in bottom, 2 lks. wide, 3 ins. deep, flows N. 80° E.; asc. 40 ft. over NE. slope. |
| 76.70 | Spring branch, 3 lks. wide, 3 ins. deep, flows N. 80° E. |
| 77.50 | Old cabin, bears S. about 50 lks. dist. |
| 78.07 | <p>The cor. of secs. 6 and 7, on the W. bdy. of the Tp., monumented with a 2 in. iron post, set, mkd. and witnessed as described in the official record of the 1922 survey.</p> <p>Land, mountainous. Soil, rocky loam. Timber, dense aspen, fir and spruce. Undergrowth, willows along Geyser Creek, grass and scattered oak brush.</p> |
| | <p>From the cor. of secs. 5, 6, 7 and 8.</p> <p>N. 0° 08' W., bet. secs. 5 and 6.</p> <p>Over mountainous land, through dense timber.</p> <p>Asc. 70 ft. over S. slope.</p> |
| 7.15 | Road, unimproved dirt, bears N. 75° W. and S. 85° E.; asc. 150 ft. over S. slope. |
| 12.90 | Spur, slopes S.; desc. 15 ft. along E. slope. |
| 19.70 | Draw, drains SE.; asc. 125 ft. over S. slope. |
| 36.00 | Road, unimproved dirt, to Geyser Pass, bears S. 80° E. and N. 80° W.; asc. 35 ft. over S. slope. |
| 39.93 | <p>Pt. for the $\frac{1}{4}$ sec. cor. of secs. 5 and 6, at proportionate dist.; there is no remaining evidence of the orig. cor.</p> <p>Set an iron post, 30 ins. long, 2$\frac{1}{2}$ ins. diam., 8 ins. in the ground to bedrock, in a mound of stone, 3 ft. base to top, with brass cap mkd.</p> |

Chains

T27S. R25E

$\frac{1}{4}$
S6 | S5
1962

from which,

An aspen, 4 ins. diam., bears N. 46° W., 13 lks. dist., mkd. $\frac{1}{4}$ S6 BT.

An aspen, 8 ins. diam., bears S. 74° E., 29 lks. dist., mkd. $\frac{1}{4}$ S5 BT.

Asc. 365 ft. over very steep, rocky S. slope.

54.60 Slope changes; asc. 510 ft. over steep, rocky SE. slope.

58.60 Leave aspen, bears irregularly E. and W., enter meadow.

68.15 Leave meadow, bears irregularly E. and W., enter dense aspen.

72.10 Center of rock slide, about 50 lks. wide, bears NW. and SE.

72.95 Top of asc., slopes E.; desc. 50 ft. along steep E. slope, enter dense spruce and fir.

80.49 The cor. of secs. 5, 6, 31 and 32, on the N. bdy. of the Tp.

Land, mountainous.

Soil, rocky loam.

Timber, dense aspen, fir and spruce.

Undergrowth, grass.

Survey of the East-West Center Line of Sec. 4

From the $\frac{1}{4}$ sec. cor. of secs. 3 and 4.

S. 89° 34' W., along the E-W center line of sec. 4, along the Manti-La Sal National Forest bdy., marking and blazing the true line.

Over mountainous land, through dense timber.

Asc. 320 ft. over SE. slope.

39.00 Slope changes; asc. 80 ft. along S. slope.

79.55 The $\frac{1}{4}$ sec. cor. of secs. 4 and 5.

Survey of the East-West Center Line of Sec. 5

From the $\frac{1}{4}$ sec. cor. of secs. 4 and 5.

S. 89° 23' W. along the E-W center line of sec. 5, along the Manti-La Sal National Forest bdy., marking and blazing the true line.

Over mountainous land, through med. dense timber.

Desc. 160 ft. along steep S. slope.

29.30 Slope changes; desc. 160 ft. over SW. slope.

Resurvey of Survey, Portion of Subdivisional Lines, T. 27 S., R. 25 E.

Chains

39.50 Slope changes; desc. 160 ft. along S. slope.

79.30 The $\frac{1}{4}$ sec. cor. of secs. 5 and 6.

Survey of Portion of Subdivision of Section 18

From the $\frac{1}{4}$ sec. cor. of secs. 18 and 19.

N. $0^{\circ} 28' E.$, along the N-S center line of sec. 18.

Over mountainous land, through dense timber; desc. 115 ft. over NE. slope.

8.00 Slope changes; desc. 350 ft. over steep, rocky N. slope.

13.20 Leave timber, enter rock slide ab. 3.00 chs. wide.

15.10 Leave rock slide, enter dense timber.

15.90 Bottom of steep desc., bears E. and W., thence over bottom of Dark Canyon.

17.60 Spring branch, 3 lks. wide, 3 ins. deep, flows N. $75^{\circ} E.$

18.70 Dark Canyon, with stream of water, 8 lks. wide, 9 ins. deep, flows S. $80^{\circ} E.$; asc. 20 ft. over gentle S. slope.

21.50 Top of small spur, slopes E.; desc. 30 ft. over NE. slope.

25.20 Road, unimproved dirt, bears N. $75^{\circ} E.$ and S. $75^{\circ} W.$

26.40 Bottom of desc., thence along E. slope.

29.85 Slope changes; asc. 80 ft. over SE. slope.

39.98 Pt. for the Center $\frac{1}{4}$ sec. cor. of sec. 18.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins. in the ground, in a mound of stone, 3 ft. base to top, with brass cap mkd.

T27S R25E
C $\frac{1}{4}$ S18
1962

from which,

An aspen, 6 ins. diam., bears N. $64^{\circ} W.$, 18 lks. dist., mkd.
C $\frac{1}{4}$ S18 BT.

An Aspen, 4 ins. diam., bears S. $5^{\circ} E.$, 22 lks. dist., mkd.
C $\frac{1}{4}$ S18 BT.

Asc. 165 ft. over SE. slope.

40.17 Old pole fence, bears N. $75^{\circ} W.$ and S. $70^{\circ} E.$

46.90 Ridge, bears E. and W.; desc. 190 ft. over NE. slope.

65.75 Slope changes; desc. 95 ft. over N. slope.

76.35 Spring branch, 3 lks. wide, 3 ins. deep, flows N. $10^{\circ} E.$; asc. 40 ft. over SE. slope.

76.75 Leave timber, enter meadow.

79.94 The $\frac{1}{4}$ sec. cor. of secs. 7 and 18.

Survey, Portion of Subdivisional Lines, T. 27 S. R. 25 E.

Chains

From the $\frac{1}{4}$ sec. cor. of secs. 17 and 18.

S. $89^{\circ} 51'$ W., along the E-W center line of sec. 18.

Over mountainous land.

- 1.90 E. shore of Dark Canyon Lake, bears N. and S., thence by triangulation across lake.
- 8.10 W. shore of lake; end of triangulation; asc. 75 ft. over SE. slope
- 18.85 Small spur, slopes NE.; desc. 10 ft. over NW. slope.
- 20.50 Small draw, drains NE.; asc. 25 ft. over SE. slope.
- 25.50 Small spur, slopes NE.; desc. 15 ft. over NW. slope.
- 31.90 Old fence, bears S. 10° E. and N. 10° W.
- 32.80 Small draw, drains NE.; asc. 155 ft. over SE. slope.
- 36.60 Old fence, bears N. 60° E. and S. 40° W.
- 38.25 Old fence, bears N. 80° E. and S. 10° W.
- 39.85 Old fence, bears N. 75° W. and S. 85° E.
- 40.05 The Center $\frac{1}{4}$ sec. cor. of sec. 18.

Asc. 330 ft. over steep SE. slope.

- 46.85 Old fence, bears N. 70° E. and S. 20° W.
- 57.00 Timber becomes dense.
- 60.06 Pt. for the Center W $1/16$ sec. cor. of sec. 18, at proportionate dist.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, in a collar of stone to top, with brass cap mkd.

T27S R25E
C W
1/16 S18
1962

from which,

An aspen, 8 ins. diam., bears N. 73° E., 12 lks. dist., mkd. CW 1/16 S18 BT.

An aspen, 4 ins. diam., bears N. $46^{\circ} 45'$ W., 16 lks. dist., mkd. CW 1/16 S18 BT.

A Forest Service bdy. marker bears S. $82^{\circ} 34'$ E., .73 lks. dist.

Asc. 80 ft. over SE. slope.

- 60.90 Leave dense timber; enter scattered timber.
- 70.90 Road, gravel, from Geyser Pass to La Sal, bears NW. and SE.; asc. 35 ft. over SE. slope.
- 79.20 The $\frac{1}{4}$ sec. cor. of sec. 18, on the W. bdy. of the Tp., monumented with a 1 in. iron post, set, mkd. and witnessed as described in the official record of the 1922 survey.

From the Center W $1/16$ sec. cor. of sec. 18.

Survey, Portion of Subdivisional Lines, T. 27 S., R. 25 E.

Chains

N. 0° 27' E., along the N-S center line of the NW $\frac{1}{4}$ of sec. 18.

Over mountainous land, through dense timber, along the Manti-La Sal National Forest bdy.; asc. 95 ft. over SE. slope.

4.00 Ridge, bears E. and W.; desc. 450 ft. over steep NE. slope.

35.00 Draw, with stream of water 5 lks. wide, 6 ins. deep, flows irregularly E.; asc. 50 ft. over gentle S. slope; leave timber.

39.97 The W 1/16 sec. cor. of secs. 7 and 18.

Survey of portion of the Subdivision of Section 7

From the $\frac{1}{4}$ sec. cor. of secs. 7 and 18.

N. 0° 06' W., along the N-S center line of sec. 7, along the Manti-La Sal National Forest bdy.

Over mountainous land; asc. 75 ft. over SE. slope, through small meadow.

3.70 Leave meadow, enter dense timber.

6.90 Spur, slopes E.; desc. 240 ft. over NE. slope.

24.20 Old log fence, bears N. 75° W. and S. 80° E.

26.35 Spring branch, 2 lks. wide, 6 ins. deep, flows S. 85° E.; asc. 45 ft. over SE. slope.

32.00 Top of asc. slopes E.; desc. 60 ft. over NE. slope.

39.94 Pt. for the Center $\frac{1}{4}$ sec. cor. of sec. 7.

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 14 ins. in the ground, in a mound of stone, 3 ft. base to top, with brass cap mkd.

T27S R25E

C $\frac{1}{4}$ S7

1962

from which

An aspen, 10 ins. diam., bears N. 53° W., 15 lks. dist., mkd. C $\frac{1}{4}$ S7 BT.

An aspen, 10 ins. diam., bears S. 9° W., 9 lks. dist., mkd. C $\frac{1}{4}$ S7 BT.

Desc. 15 ft. over NE. slope.

41.20 Old log fence, bears N. 75° W. and S. 75° E.

42.80 Several small spring branches, flowing E. 20 lks. to beaver pond; asc. 40 ft. over SE. slope.

43.30 Leave timber, enter meadowland.

50.15 Old log fence, bears N. 70° E. and N. 80° W.; Blue Lake, bears W. 1.50 chs. dist.

52.00 Leave meadow, enter med. dense timber. Unimproved dirt road to Blue Lake, bears irregularly S. and NW., and W. 1.50 chs. dist.

54.10 Beaver pond, bears E. 2.00 chs. dist.

Chains

59.92 Pt. for the Center N 1/16 sec. cor. of sec. 7, at proportionate dist.

Set an iron post, 30 ins. long 2½ ins. diam., 10 ins. in the ground, in a mound of stone, 3 ft. base to top, with brass cap mkd.

T27S R25E
C N
1/16 S 7
1962

from which

A fir, 6 ins. diam., bears N. 48° 15' E., 8 lks. dist., mkd.
C N 1/16 S 7 BT.

A fir, 8 ins. diam., bears S. 88° 30' W., 19 lks. dist., mkd.
C N 1/16 S 7 BT.

A National Forest Service bdy. marker, bears S. 70° 51' E., 1.05 chs. dist.

Desc. 205 ft. over NE. slope; leave Forest Service bdy.

60.55 Road, unimproved, bears N. 70° W. and S. 85° E.

79.90 The ¼ sec. cor. of secs. 6 and 7.

From the ¼ sec. cor. of secs. 7 and 8.

S. 89° 50' W., along the E-W center line of sec. 7.

Over mountainous land, through med. dense timber; asc. 115 ft. over E slope.

13.20 Leave spruce and fir, enter aspen; asc. 100 ft. over E. slope.

23.30 Leave aspen, enter meadow land; 4 log cabins bear S. 20° W., 2.00 chs. dist.

27.75 Old log fence, bears N. 40° E. and S. 20° W., enter aspen.

28.05 Road, unimproved, bears N. 40° E. and S. 20° W.; asc. 100 ft. over NE. slope.

31.80 Old log fence, bears N. 70° E. and S. 60° W.; asc. 15 ft. over NE. slope.

33.10 Road, unimproved, to Blue Lake, bears N. 5° W. and S. 75° E.; asc. 25 ft. over NE. slope.

35.40 Old log fence, bears N. 50° W. and S. 60° E.

39.74 The Center ¼ sec. cor. of sec. 7.

sc. 45 ft. over NE. slope.

44.05 Enter aspen, spruce and fir; asc. 100 ft. over steep NE. slope.

48.55 Old log fence, bears N. 20° E. and S. 80° W.; asc. 120 ft. over steep NE. slope.

62.75 Slope changes; asc. 90 ft. along N. slope.

69.80 Road, unimproved, bears N. 50° W. and S. 30° E.; asc. 40 ft. along N. slope.

73.10 Leave timber, enter rock slide; spur, slopes NE.; desc. 10 ft. along

Department A Survey, Portion of Subdivisional Lines, T. 27 S., R. 25 E.

Chains

73.70 Small draw, drains NE.; asc. 100 ft. over steep SE. slope, through med. dense timber.


78.66 The 1/4 sec. cor. of sec. 7, on the W. bdy. of the Tp., monumented with a 1 in. iron post, set, mkd. and witnessed as described in the official record of the 1922 survey.

From the Center N 1/16 sec. cor. of sec. 7.
S. 89° 53' W., along the E-W center line of the NW 1/4 of sec. 7.
Over mountainous land, along the Manti-LaSal National Forest bdy.

1.55 Road, unimproved, to Blue Lake, bears irregularly N. and S.; asc. 350 ft. over NE. slope, through med. dense timber.

26.00 Enter log-out area.

38.70 Intersect the W. bdy. of the Tp.
Pt. for the N 1/16 sec. cor. of sec. 7, at proportionate dist. bet. the 1/4 sec. cor. of sec. 7 and the cor. of secs. 6 and 7.
Set an iron post, 30 ins. long, 2 1/2 ins. diam., 18 ins. in the ground in a mound of stone, 3 ft. base to top, with brass cap mkd.



from which

A fir, 4 ins. diam., bears N. 48° 45' E., 43 lks. dist., mkd. N 1/16 S7 BT.

A fir, 6 ins. diam., bears S. 89° 30' E., 47 lks. dist., mkd. N 1/16 S7 BT.

A Forest Service bdy. marker bears N. 56° 19' E., 11 lks. dist.

General Description

Sections 4, 5, 6, 7 and 18, T. 27 S., R. 25 E. are located in the La Sal Mountains. The area is covered with dense fir, spruce and aspen, with scattered areas of dense oak brush and grassy meadows. There are numerous small ponds, reservoirs and springs in the area. There are two lakes in the area; Dark Canyon Lake, located in the SE 1/4 of the NE 1/4, sec. 18, and Blue Lake, located in the SE 1/4 of the NW 1/4 of sec. 7. There are numerous roads in the area, used mainly for logging purposes. The area is good land for grazing. The soil is rocky loam. The area is drained in an easterly direction by Dark Canyon and Geysers Creek, with small draws draining into them. The elevation varies from 9,200 feet to 11,000 feet above sea level.


The Manti-La Sal National Forest boundary follows along the E-W center lines of sections 4 and 5, along the north half mile between sections 5 and 6, thence along the north and west boundaries of section 6, along the west boundary of the NW 1/4 NW 1/4 of section 7, along the E-W center line of the NW 1/4, section 7, thence south along the N-S center line of section 7, thence along the south boundary of section 7 to the W 1/16 section corner of sections 7 and 18, thence south along the N-S center line of the NW 1/4, section 18, thence along the south boundary of the SW 1/4 NW 1/4, section 18, thence south along the west boundary of section 18.

34
CERTIFICATE OF CADASTRAL ENGINEER

I, Allen L. Tuft, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 9th day of May, 1962 I have ~~surveyed~~ independently resurveyed a portion of the N. bdy., and a portion of the subdivisional lines, and surveyed the east-west center lines of sections 4 and 5, and a portion of the subdivision of sections 7 and 18 of Township 27 South, Range 25 East

of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in the specific manner described in the foregoing field notes.

Salt Lake City, Utah
January 25, 1963


Allen L. Tuft, Cadastral Surveyor

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT,
Washington, D. C., AUG 26 1963, 19

The foregoing field notes of the ~~survey~~ independent resurvey of a portion of the north boundary and a portion of the subdivisional lines and the survey of the east-west center lines of sections 4 and 5, and a portion of the subdivision of sections 7 and 18 of Township 27 South, Range 25 East executed by Allen L. Tuft, Cadastral Surveyor having been critically examined and found correct, are hereby approved.


Chief, Division of Cadastral Engineering
Chief, Division of Engineering

CERTIFICATE OF TRANSCRIPT

I CERTIFY that the foregoing ~~transcript~~ transcript of the field notes of the above-described surveys in _____, is a true copy of the original field notes.

Chief, Division of Cadastral Engineering

INDEX DIAGRAM

Township 1 NORTH , *Range* 13 EAST

| | | | | | | | | |
|----|----|----|----|----|----|----|----|----|
| 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 |
| 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 |
| 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 |
| 27 | 28 | 29 | 30 | 31 | 32 | 33 | 34 | 35 |
| 36 | 37 | 38 | 39 | 40 | 41 | 42 | 43 | 44 |
| 45 | 46 | 47 | 48 | 49 | 50 | 51 | 52 | 53 |
| 54 | 55 | 56 | 57 | 58 | 59 | 60 | 61 | 62 |

Township 1 North, Range 13 West

Chains

The south boundary (Salt Lake Base Line), the east boundary, the west boundary and the north boundary were surveyed by Andrew Nelson in 1925.

The following field notes are those of the survey of a portion of the subdivision of Township 1 North, Range 13 West, deemed sufficient in extent to facilitate development of the natural resources and mark the boundaries of those sections that normally are considered state school sections.

The survey was executed with a W. & L. E. Gurley Solar Transit No. 570628 constructed in accordance with the standard instrumental specifications of the Bureau of Land Management. The instrument was in good condition prior to the beginning of the survey and was maintained in proper adjustment throughout the progress of this survey.

Corners on east-west lines were set on the true latitudinal curve. Lines connecting previously established corners were run by random and true method, but for simplification of the record the random lines are omitted from the field notes. In accordance with the intent of the special instructions, all subdivisional corners established are calculated to be at the position they would occupy if the entire township were subdivided.

Measurements herein contained were made with a narrow steel tape, 8 chains in length, graduated every link for the first 100 links and thereafter at intervals of 10 links. The tape was tested by comparison with a one chain standard steel tape and found to be correct. Measurements were made on the slope with the vertical angle of each interval ascertained by a clinometer in good adjustment; horizontal equivalents alone are entered in the field notes. All lines of this survey were run by direct method.

The direction of the lines of this survey were determined by reference to true meridians established on line by altitude observations on the sun. The lines were carried forward by sustained angulation being supplemented by other numerous altitude observations on the sun taken throughout the progress of the survey.

The geographic position for the southeast corner of the township is at latitude 40° 46' 04" N. and longitude 113° 15' 39" W. as adjusted from traverses to U. S. G. S. triangulation stations within the area.

The magnetic declination was read at a number of stations throughout the township and the average of these readings was found to be 17° East.

Survey of a Portion of the Subdivision of
Township 1 North, Range 13 West

Beginning at the standard cor. of secs. 35 and 36, on the S. bdy. of the Tp., monumented with a fir post, 4x4 ins., set, mkd. and witnessed as described in the official record.

N. 0° 01' W., bet. secs. 35 and 36.

Over nearly level desert through scattered shadscale.

Sandy knoll, bears NW, and SE.

Point for the $\frac{1}{4}$ sec. cor. of secs. 35 and 36.

30.00

40.00

Surve of a Portion of the Sub i sion of T.

Chains

Set a fir post, 4x4 ins., 4 ft. long, 38 ins. in the ground, scribed as follows:

T1N on N.; S36 on E.; R13W on S. and $\frac{1}{2}$ S35 on W. faces.
Dig pits, 18x18x12 ins., N. and S. of cor., 4 ft. dist.,
and raise a mound of earth, 3 $\frac{1}{2}$ ft. base, 1 $\frac{1}{2}$ ft. high,
W. of cor. Deposit glass at base of post.

Continue over nearly level desert.

60.00 Sandy knoll, bears NE. and SW.

80.00 Point for the cor. of secs. 25, 26, 35 and 36.

Set a fir post, 4x4 ins., 4 ft. long, 38 ins. in the ground, scribed as follows:

T1N S25 on NE.; R13W-S36 on SE.; S35 on SW. and S26 on
NW. faces, with 1 notch on S. and E. edges. Dig pits,
18x18x12 ins., in each sec., 4 ft. dist., and raise a
mound of earth, 4 ft. base, 2 ft. high, W. of cor.
Deposit glass at base of post.

Land, nearly level desert.

Soil, sticky, sandy clay.

Vegetation, scattered shadscale.

From the cor. of secs. 25, 30, 31 and 36 on the E. bdy. of the Tp.,
monumented with a fir post, 4x4 ins., set, mkd. and witnessed as
described in the official record.

West, bet. secs. 25 and 36.

Over nearly level desert through scattered shadscale and bud sage.

40.00 Point for the $\frac{1}{2}$ sec. cor. of secs. 25 and 36.

Set a fir post, 4x4 ins., 4 ft. long, 38 ins. in the ground, scribed
as follows:

$\frac{1}{2}$ S25 on N.; T1N on E.; S36 on S. and R13W on W. faces.
Dig pits, 18x18x12 ins., E. and W. of cor., 4 ft. dist.,
and raise a mound of earth, 3 $\frac{1}{2}$ ft. base, 1 $\frac{1}{2}$ ft. high,
N. of cor. Deposit glass at base of post.

Continue over nearly level desert.

80.00 The cor. of secs. 25, 26, 35 and 36.

Land, nearly level desert.

Soil, sticky, sandy clay, saturated with mineral.

Vegetation, scattered shadscale and bud sage.

From the standard cor. of secs. 33 and 34, on the S. bdy. of the Tp.,
monumented with a fir post, 4x4 ins., set, mkd. and witnessed as
described in the official record.

N. 0° 02' W., bet. secs. 33 and 34.

Over nearly level desert through scattered shadscale.

40.00 Point for the $\frac{1}{2}$ sec. cor. of secs. 33 and 34.

Survey of a Portion of the Subdivision of T. 1 N., R. 13 W.

Chains

Set a fir post, 4x4 ins., 4 ft. long, 38 ins. in the ground, scribed as follows:

T1N on N.; S34 on E.; R13W on S. and $\frac{1}{4}$ S33 on W. faces. Dig pits, 18x18x12 ins., N. and S. of cor., 4 ft. dist., and raise a mound of earth, 4 ft. base, 2 ft. high, W. of cor. Deposit glass at base of post.

Continue over nearly level desert.

80.00

Point for the cor. of secs. 27, 28, 33 and 34.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:

T1N S27 on NE.; R13W S34 on SE.; S33 on SW. and S28 on NW. faces, with 1 notch on S. and 3 on E. edges. Dig pits, 18x18x12 ins., in each sec. 4 ft. dist. Deposit glass at base of post.

Land, nearly level desert.
Soil, sandy clay.
Vegetation, scattered shadscale.

N. 0° 02' W., bet. secs. 27 and 28.

Over nearly level sandy clay knolls through scattered shadscale.

40.00

Point for the $\frac{1}{4}$ sec. cor. of secs. 27 and 28.

Set a fir post, 4x4 ins., 4 ft. long, 38 ins. in the ground, scribed as follows:

T1N on N.; S27 on E.; R13W on S. and $\frac{1}{4}$ S28 on W. faces. Dig pits, 18x18x12 ins., N. and S. of cor., 4 ft. dist., and raise a mound of earth, 3 $\frac{1}{2}$ ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor. Deposit glass at base of post.

Continue over nearly level sandy clay knolls.

80.00

Point for the cor. of secs. 21, 22, 27 and 28.

Set a fir post, 4x4 ins., 4 ft. long, 38 ins. in the ground, scribed as follows:

T1N S22 on NE.; R13W S27 on SE.; S28 on SW. and S21 on NW. faces, with 2 notches on S. and 3 on E. edges. Dig pits, 18x18x12 ins., in each sec., 4 ft. dist. Deposit glass at base of post.

Land, nearly level knolls.
Soil, sandy clay, with alkali crust.
Vegetation, scattered shadscale.

N. 0° 02' W., bet. secs. 21 and 22.

Over gently rolling sandy clay dunes through scattered shadscale.

40.00

Point for the $\frac{1}{4}$ sec. cor. of secs. 21 and 22.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:

Survey of a Portion of the Subdivision of N

Chains

T1N on N.; S22 on E.; R13W on S. and $\frac{1}{4}$ S21 on W. faces. Dig pits, 18x18x12 ins., N. and S. of cor., 4 ft. dist., and raise a mound of earth, 4 ft. base, 2 ft. high, W. of cor. Deposit glass at base of post.

Continue over gently rolling land.

80.00 Point for the cor. of secs. 15, 16, 21 and 22.

Set a fir post, 4x4 ins., 4 ft. long, 38 ins. in the ground, scribed as follows:

T1N S15 on NE.; R13W S22 on SE.; S21 on SW. and S16 on NW. faces, with 3 notches on S. and E. edges. Dig pits, 18x18x12 ins., in each sec., 4 ft. dist. Deposit glass at base of post.

Land, gently rolling desert.
Soil, sandy clay.
Vegetation, scattered shadscale.

N. 0° 02' W., bet. secs. 15 and 16.

Over nearly level land through scattered shadscale.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 15 and 16.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:

T1N on N.; S15 on E.; R13W on S. and $\frac{1}{4}$ S16 on W. faces. Dig pits, 18x18x12 ins., N. and S. of cor., 4 ft. dist., and raise a mound of earth, 4 ft. high, W. of cor. Deposit glass at base of post.

Continue over nearly level land.

80.00 Point for the cor. of secs. 9, 10, 15 and 16.

Set a fir post, 4x4 ins., 4 ft. long, 38 ins. in the ground, scribed as follows:

T1N S10 on NE.; R13W S15 on SE.; S16 on SW. and S9 on NW. faces, with 4 notches on S. and 3 on E. edges. Dig pits, 18x18x12 ins., in each sec., 4 ft. dist. Deposit glass at base of post.

Land, nearly level.
Soil, sandy clay, with alkali crust.
Vegetation, scattered shadscale.

N. 0° 02' W., bet. secs. 9 and 10.

Over nearly level desert through scattered shadscale.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 9 and 10.

Set a fir post, 4x4 ins., 4 ft. long, 38 ins. in the ground, scribed as follows:

T1N on N.; S10 on E.; R13W on S. and $\frac{1}{4}$ S9 on W. faces. Dig pits, 18x18x12 ins., N. and S. of cor., 4 ft. dist., and raise a mound of earth, 4 ft. base, 2 ft. high, W. of cor. Deposit glass at base of post.

Survey of a Portion of the Subdivision of T. 1 N., R. 13 W.

Chains

Continue over nearly level desert.

80.00

Point for the cor. of secs. 3, 4, 9 and 10.

Set a fir post, 4x4 ins., 4 ft. long, 38 ins. in the ground, scribed as follows:

T1N S3 on NE.; R13W S10 on SE.; S9 on SW. and S4 on NW. faces. Dig pits, 18x18x12 ins. in each sec., 4 ft. dist., and raise a mound of earth, 4 ft. base, 2 ft. high, W. of cor. Deposit glass at base of post.

Land, nearly level desert.

Soil, sandy clay, with alkali crust.

Vegetation, scattered shadscale.

N. 0° 03' W., bet. secs. 3 and 4.

Over nearly level desert, void of vegetation.

40.00

Point for the $\frac{1}{4}$ sec. cor. of secs. 3 and 4.

Set a fir post, 4x4 ins., 4 ft. long, 40 ins. in the ground, scribed as follows:

T1N on N.; S3 on E.; R13W on S. and $\frac{1}{4}$ S4 on W. faces. Dig pits, 18x18x12 ins., N. and S. of cor., 4 ft. dist., and raise a mound of earth, 4 ft. base, 2 ft. high, W. of cor. Deposit glass at base of post.

Continue over nearly level, barren desert.

80.00

Point for the 1/16 sec. cor. of secs. 3 and 4.

Set a fir post, 4x4 ins., 4 ft. long, 38 ins. in the ground, scribed as follows:

T1N on N.; R13W S3 on E.; 1/16 80 on S. and S4 on W. faces. Dig pits, 18x18x12 ins., N. and S. of cor., 4 ft. dist. and raise a mound of earth, 4 ft. base, 2 ft. high, W. of cor. Deposit glass at base of post.

85.09

The cor. of secs. 3, 4, 33 and 34 on the N. bdy. of the Tp., monumented with a fir post, 4x4 ins., set, mkd. and witnessed as described in the official record.

Land, level, barren desert.

Soil, sandy clay, saturated with mineral.

Vegetation, none.

From the cor. of secs. 1, 2, 35 and 36, on the N. bdy. of the Tp., monumented with a fir post, 4x4 ins., set, mkd. and witnessed as described in the official record.

S. 0° 01' E., bet. secs. 1 and 2.

Over level desert through scattered shadscale.

5.13

Point for the 1/16 sec. cor. of secs. 1 and 2, at a calculated point bet. the 1/16 sec. cor. of secs. 3 and 4 and the theoretical 1/16 sec. cor. of secs. 1 and 6.

Chains

Set a fir post, 4x4 ins., 4 ft. long, 38 ins. in the ground, scribed as follows:

T1N on N.; R13W S1 on E.; 1/16 80 on S. and S2 on W. faces. Dig pits, 18x18x12 ins., N. and S. of cor., 4 ft. dist. and raise a mound of earth, 4 ft. base, 2 ft. high, W. of cor. Deposit glass at base of post.

- 45.13 Point for the $\frac{1}{4}$ sec. cor. of secs. 1 and 2, at a calculated point bet. the $\frac{1}{4}$ sec. cor. of secs. 3 and 4 and the $\frac{1}{4}$ sec. cor. of secs. 1 and 6.

Set a fir post, 4x4 ins., 4 ft. long, 39 ins. in the ground, scribed as follows:

T1N on N.; S1 on E.; R13W on S. and $\frac{1}{4}$ S2 on W. faces. Dig pits, 18x18x12 ins., N. and S. of cor., $3\frac{1}{2}$ ft. dist. and raise a mound of earth, 4 ft. base, 2 ft. high, W. of cor. Deposit glass at base of post.

Continue over level, desert.

- 85.13 Point for the cor. of secs. 1, 2, 11 and 12 at a calculated point bet. the cor. of secs. 3, 4, 9 and 10 and the cor. of secs. 1, 6, 7 and 12.

Set a fir post, 4x4 ins., 4 ft. long, 39 ins. in the ground, scribed as follows:

T1N S1 on NE.; R13W S12 on SE.; S11 on SW. and S2 on NW. faces. Dig pits, 18x18x12 ins., in each sec., 4 ft. dist. Deposit glass at base of post.

Land, level desert.

Soil, sandy clay.

Vegetation, scattered shadscale, greasewood and sagebrush.

From the cor. of secs. 2, 3, 34 and 35, on the N. bdy. of the Tp., monumented with a fir post, 4x4 ins., set, mtd. and witnessed as described in the official record.

S. $0^{\circ} 02'$ E., bet. secs. 2 and 3.

Over level desert through scattered vegetation.

- 5.11 Point for the 1/16 sec. cor. of secs. 2 and 3 at a calculated point bet. the 1/16 sec. cor. of secs. 3 and 4 and the theoretical 1/16 sec. cor. of secs. 1 and 6.

Set a fir post, 4x4 ins., 4 ft. long, 37 ins. in the ground, scribed as follows:

T1N on N.; R13W S2 on E.; 1/16 80 on S. and S3 on W. faces. Dig pits, 18x18x12 ins., N. and S. of cor., 4 ft. dist., and raise a mound of earth, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, W. of cor. Deposit glass at base of post.

- 45.11 Point for the $\frac{1}{4}$ sec. cor. of secs. 2 and 3, at a calculated point bet. the $\frac{1}{4}$ sec. cor. of sec. 3 and 4 and the $\frac{1}{4}$ sec. cor. of secs. 1 and 6.

Set a fir post, 4x4 ins., 4 ft. long, 38 ins. in the ground, scribed as follows:

Survey of a Portion of the Subdivision of T. 14 N., R. 13 W.

Chains

T1N on N.; S2 on E.; R13W on S. and $\frac{1}{2}$ S3 on W. faces.
Dig pits, 18x18x12 ins., N. and S. of cor., 3 ft. dist.
and raise a mound of earth, 3 $\frac{1}{2}$ ft. base, 1 $\frac{1}{2}$ ft. high,
W. of cor. Deposit glass at base of post.

Continue over level desert.

85.11 Point for the cor. of secs. 2, 3, 10 and 11, at a calculated point
betw the cor. of secs. 3, 4, 9 and 10 and the cor. of secs. 1, 6, 7
and 12.

Set a fir post, 4x4 ins., 4 ft. long, 38 ins. in the ground, scribed
as follows:

T1N S2 on NE.; R13W S11 on SE., S10 on SW. and S3 on NW.
faces, with 5 notches on S. and 2 on E. edges. Dig pits,
18x18x12 ins., in each sec., 4 ft. dist. Deposit glass
at base of post.

Land, level desert.

Soil, alkali clay.

Vegetation, scattered shadscale and bud sage.

From the cor. of secs. 1, 2, 11 and 12.

S. 89° 57' W., bet. secs. 2 and 11.

Over level desert through scattered vegetation.

40.00 Point for the $\frac{1}{2}$ sec. cor. of secs. 2 and 11.

Set a fir post, 4x4 ins., 4 ft. long, 38 ins. in the ground, scribed
as follows:

$\frac{1}{2}$ S2 on N.; T1N on E.; S11 on S. and R13W on W. faces.
Dig pits, 18x18x12 ins., E. and W. of cor., 4 ft. dist.
and raise a mound of earth, 3 $\frac{1}{2}$ ft. base, 2 ft. high,
N. of cor. Deposit glass at base of post.

80.00 The cor. of secs. 2, 3, 10 and 11.

Land, nearly level desert.

Soil, alkali clay.

Vegetation, scattered shadscale and bud sage.

From the cor. of secs. 15, 16, 21 and 22.

West, bet. secs. 16 and 21.

Over nearly level sandy desert through scattered vegetation.

40.00 Point for the $\frac{1}{2}$ sec. cor. of secs. 16 and 21.

Set a fir post, 4x4 ins., 4 ft. long, 38 ins. in the ground, scribed
as follows:

$\frac{1}{2}$ S16 on N.; T1N on E.; S21 on S. and R13W on W. faces.
Dig pits, 18x18x12 ins., E. and W. of cor., 4 ft. dist.
and raise a mound of earth, 4 ft. base, 2 ft. high, N.
of cor. Deposit glass at base of post.

Continue over nearly level desert.

Survey of a Portion of the S. di. n. f. .1 N., R. 13 W.

Chains

start

80.00 Point for the cor. of secs. 16, 17, 20 and 21.

Set a fir post, 4x4 ins., 4 ft. long, 38 ins. in the ground, scribed as follows:

T1N S16 on NE.; R13W S21 on SE.; S20 on SW. and S17 on NW. faces, with 3 notches on S. and 4 on E. edges. Dig pits, 18x18x12 ins. in each sec., 4 ft. dist., and raise a mound of earth, 4 ft. base, 2 ft. high, W. of cor. Deposit glass at base of post.

Land, level, alkali desert.
Soil, sticky clay, saturated with minerals.
Vegetation, scattered shadscale.

N. 0° 03' W., bet. secs. 16 and 17.

Over level, barren desert.

40.00 Point for the 1/4 sec. cor. of secs. 16 and 17.

Set a fir post, 4x4 ins., 4 ft. long, 40 ins. in the ground, scribed as follows:

T1N on N.; S16 on E.; R13W on S. and 1/4 S17 on W. faces. Dig pits, 18x18x12 ins., N. and S. of cor., 4 ft. dist. and raise a mound of earth, 3 1/2 ft. base, 2 ft. high, W. of cor. Deposit glass at base of post.

Continue over level, barren desert.

80.00 Point for the cor. of secs. 8, 9, 16 and 17.

Set a fir post, 4x4 ins., 4 ft. long, 38 ins. in the ground, scribed as follows:

T1N S9 on NE.; R13W S16 on SE.; S17 on SW. and S8 on NW. faces, with 4 notches on S. and E. edges. Dig pits, 18x18x12 ins., in each sec., 4 ft. dist. and raise a mound of earth, 3 1/2 ft. base, 2 ft. high, W. of cor., Deposit glass at base of post.

Land, level desert.
Soil, sticky, wet, alkali clay.
Vegetation, none.

From the cor. of secs. 9, 10, 15 and 16.

S. 89° 59' W., bet. secs. 9 and 16.

Over level, barren desert.

40.00 Point for the 1/4 sec. cor. of secs. 9 and 16.

Set a fir post, 4x4 ins., 4 ft. long, 38 ins. in the ground, scribed as follows:

1/4 S9 on N.; T1N on E.; S16 on S. and R13W on W. faces. Dig pits, 18x18x12 ins., E. and W. of cor., 4 ft. dist. and raise a mound of earth, 4 ft. base, 2 ft. high, N. of cor. Deposit glass at base of post.

Survey of a Portion of the Subdivision of T. 1 N., R. 13 W.

Chains

Continue over level, barren desert.

80.00

The cor. of secs. 8, 9, 16 and 17.

Land, level, barren desert.

Soil, sandy clay, saturated with mineral.

Vegetation, none.

From the standard cor. of secs. 32 and 33, on the S. bdy. of the Tp., monumented with a fir post, 4x4 ins., set, mkd. and witnessed as described in the official record.

N. 0° 03' W., bet. secs. 32 and 33.

Over nearly level desert through scattered shadscale and greasewood.

40.00

Point for the $\frac{1}{4}$ sec. cor. of secs. 32 and 33.

Set a fir post, 4x4 ins., 4 ft. long, 40 ins. in the ground, scribed as follows:

T1N on N.; S33 on E.; R13W on S. and $\frac{1}{4}$ S32 on W. faces.

Dig pits, 18x18x12 ins., N. and S. of cor., 4 ft. dist.

and raise a mound of earth, 3 $\frac{1}{2}$ ft. base, 1 $\frac{1}{2}$ ft. high,

W. of cor. Deposit glass at base of post.

Continue over nearly level desert.

80.00

Point for the cor. of secs. 28, 29, 32 and 33.

Set a fir post, 4x4 ins., 4 ft. long, 40 ins. in the ground, scribed as follows:

T1N S28 on NE.; R13W S33 on SE.; S32 on SW. and S29 on

NW. faces. Dig pits, 18x18x12 ins., in each sec., 4 ft.

dist. and raise a mound of earth, 4 ft. base, 2 ft.

high, W. of cor. Deposit glass at base of post.

Land, nearly level desert.

Soil, sandy clay, with alkali crust.

Vegetation, scattered shadscale and greasewood.

From the standard cor. of secs. 31 and 32, on the S. bdy. of the Tp. monumented with a fir post, 4x4 ins., set, mkd. and witnessed as described in the official record.

N. 0° 04' W., bet. secs. 31 and 32.

Over level desert through scattered shadscale.

40.00

Point for the $\frac{1}{4}$ sec. cor. of secs. 31 and 32.

Set a fir post, 4x4 ins., 4 ft. long, 38 ins. in the ground, scribed as follows:

T1N on N.; S32 on E.; R13W on S. and $\frac{1}{4}$ S31 on W. faces.

Dig pits, 18x18x12 ins., N. and S. of cor., 4 ft. dist.

and raise a mound of earth, 4 ft. base, 2 ft. high, W.

of cor. Deposit glass at base of post.

Continue over level desert.

80.00

Point for the cor. of secs. 29, 30, 31 and 32.

Chains

Set a fir post, 4x4 ins., 4 ft. long, 40 ins. in the ground, scribed as follows:

T1N S29 on NE.; R13W S32 on SE.; S31 on SW. and S30 on NW. faces, with 1 notch on S. and 5 on E. edges. Dig pits, 18x18x12 ins., in each sec., 4 ft. dist. Deposit glass at base of post.

Land, level, alkali desert.
Soil, sandy clay, with alkali crust.
Vegetation, scattered shadscale.

From the cor. of secs. 28, 29, 32 and 33.

N. 89° 59' W., bet. secs. 29 and 32.

Over level, barren desert.

40.02 Point for the $\frac{1}{4}$ sec. cor. of secs. 29 and 32.

Set a fir post, 4x4 ins., 4 ft. long, 38 ins. in the ground, scribed as follows:

$\frac{1}{4}$ S29 on N.; T1N on E.; S32 on S. and R13W on W. faces. Dig pits, 18x18x12 ins., E. and W. of cor., 4 ft. dist. and raise a mound of earth, 4 ft. base, 2 ft. high, N. of cor. Deposit glass at base of post.

Continue over level, barren desert.

80.04 The cor. of secs. 29, 30, 31 and 32.

Land, level, barren desert.
Soil, sandy clay, with alkali crust.
Vegetation, none.

General Description

Township 1 North, Range 13 West, is located about 3 miles north of Knolls, Utah in the Great Salt Lake Desert, and is nearly level land covered with scattered small shadscale brush and some greasewood and bud sagebrush. The soil is fourth rate alkali, sandy clay.

There are no roads in the township and no water was noted in this area. The elevation is 4,200 ft. above sea level. The north boundary of the township is the boundary line of the Wendover Gunnery Range. There is little or no drainage in this area.

CERTIFICATE OF SURVEY

I, Woodrow H. Sylvester, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 22 day of August, 1960, I have supervised the survey of a portion of the subdivision of Township 1 North, Range 13 West,

of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed ~~by me~~ under my supervision and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

August 23, 1963 (Date)

Woodrow H. Sylvester (Cadastral Surveyor)

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT, Washington, D. C. OCT 3 1963

The foregoing field notes of the survey of a portion of the subdivision of Township 1 North, Range 13 West, Salt Lake Meridian, Utah

executed by Leonard W. Murphy, Survey Technician, under the supervision of Woodrow H. Sylvester, Cadastral Surveyor having been critically examined and found correct, are hereby approved.

(Date)

Clark I. Gumm Acting (Chief, Division of Engineering)

CERTIFICATE OF TRANSCRIPT

I CERTIFY That the foregoing transcript of the field notes of the above-described surveys in, is a true copy of the original field notes.

(Date)

(Chief, Division of Engineering)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

ORIGINAL

FIELD NOTES

OF THE

SURVEY

OF A PORTION OF THE SUBDIVISION

OF

TOWNSHIP 1 NORTH, RANGE 12 WEST

Of the SALT LAKE Meridian,

the State of UTAH

EXECUTED BY

Boyd S. Owens - Cadastral Surveyor

Leonard W. Murphy - Survey Technician

Under the supervision of Woodrow H. Sylvester - Cadastral Surveyor

Under special instructions dated August 22, 1960, which provided

for the surveys included under Group No. 441, approved September 6, 1960

and assignment instructions dated September 6, 1960,
May 16, 1961

Survey commenced May 16, 1961

Survey completed May 18, 1961

INDEX DIAGRAM

Township 1 NORTH , *Range* 12 WEST

| | | | | | | | | |
|----|----|----|----|----|----|----|----|----|
| 6 | 5 | 4 | 6 | 8 | 8 | 2 | 7 | 1 |
| | | | | | 9 | | | |
| 7 | 8 | 9 | 5 | 10 | 11 | 12 | | 13 |
| 14 | 17 | 10 | 16 | 5 | 15 | 14 | | 13 |
| | | 9 | | | | | | |
| 19 | 20 | 21 | 4 | 22 | 23 | 24 | | 25 |
| 26 | 27 | 28 | 3 | 27 | 26 | 25 | | 24 |
| 31 | 12 | | | | | | | 2 |
| | 11 | 22 | 11 | 23 | 3 | 24 | 25 | 1 |
| | | | | | | | | |

GPO 886119

Lines surveyed by Boyd S. Owens _____

Lines surveyed by Leonard W. Murphy _____

Township 1 North, Range 12 West

Chains

The south boundary (Salt Lake Base Line), the west boundary and the north boundary, of T. 1 N., R. 12 W., were surveyed by Andrew Nelson in 1925. The east boundary was surveyed by Howard W. Miller and Robert Clark in 1913.

The following field notes are those of the survey of a portion of the subdivision of Township 1 North, Range 12 West, deemed sufficient in extent to facilitate development of the natural resources and mark the boundaries of those sections that normally are considered state school sections.

The survey was executed with a W. & L. E. Gurley Solar Transit No. 591189 and No. 570628 constructed in accordance with the standard instrumental specifications of the Bureau of Land Management. The instrument was in good condition prior to the beginning of the survey and was maintained in proper adjustment throughout the progress of this survey.

Corners on east-west lines were set on the true latitudinal curve. Lines connecting previously established corners were run by random and true method, but for simplification of the record the random lines are omitted from the field notes. In accordance with the intent of the special instructions, all subdivisional corners established are calculated to be at the position they would occupy if the entire township were subdivided.

Measurements herein contained were made with a narrow steel tape, 8 chains in length, graduated every link for the first 100 links and thereafter at intervals of 10 links. The tape was tested by comparison with a one chain standard steel tape and found to be correct. Measurements were made on the slope with the vertical angle of each interval ascertained by a clinometer in good adjustment; horizontal equivalents alone are entered in the field notes. All lines of this survey were run by direct method.

The direction of the lines of this survey were determined by reference to true meridians established on line by altitude observations on the sun. The lines were carried forward by sustained angulation being supplemented by other numerous altitude observations on the sun taken throughout the progress of the survey.

The geographic position for the southeast corner of the township is at latitude 40° 46' 04" N. and longitude 113° 08' 47" W. as adjusted from the official plats of the 1925 survey of the Salt Lake Base Line.

The magnetic declination was read at a number of stations throughout the township and the average of these readings was found to be 17° East.

Survey of a Portion of the Subdivision of
Township 1 North, Range 12 West

Beginning at the standard cor. of secs. 35 and 36, on the S. bdy. of the Tp., monumented with a 2 in. iron post, set, mkd. and witnessed as described in the official record.

N. 0° 01' W., bet. secs. 35 and 36.

Over nearly level desert through moderate vegetation.

Point for the ¼ sec. cor. of secs. 35 and 36.

40.00

Survey of a Portion of the Subdivision of T. 1 N., R. 12 W.

Chains

MILES (?)

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T1N R12W

¼

S35|S36

1961

Raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor.

Continue over nearly level desert.

80.00

Point for the cor. of secs. 25, 26, 35 and 36.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T1N R12W

S26|S25

S35|S36

1961

Raise a mound of stone, 3 ft. base, 1½ ft. high, W. of cor.

Land, nearly level desert.

Soil, clay.

Vegetation, greasewood and shadscale.

From the cor. of secs. 25, 30, 31 and 36, on the E. bdy. of the Tp., monumented with a 3 in. iron post, set, mkd. and witnessed as described in the official record.

N. 89° 58' W., bet. secs. 25 and 36.

Over gently rolling desert, through greasewood and shadscale.

Asc. 100 ft. over gentle E. slope.

10.00

Top of ascent, bears irregularly N. and S., desc. 80 ft. over gentle W. slope.

21.90

Road, unimproved, bears N. 15° W. and S. 15° E.

23.80

Wash, 10 lks. wide, 1 ft. deep, drains S. 10° E., asc. 25 ft. over gentle E. slope.

40.01

Point for the ¼ sec. cor. of secs. 25 and 36.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T1N R12W

¼

S25|S26

S36

1961

Raise a mound of stone, 3½ ft. base, 2½ ft. high, W. of cor.

Asc. 65 ft. over gentle E. slope.

46.40

E. rim of ridge, bears N. and S., thence over top.

49.30

Top of ridge, bears N. and S., desc. 155 ft. over gentle W. slope.

Survey of a Portion of the Subdivision of T. 1 N., R. 12 W.

Chains

- 80.02 The cor. of secs. 25, 26, 35 and 36.
Land, rolling desert.
Soil, rocky, sandy clay.
Vegetation, greasewood, bud sage and shadscale.
-
- From the standard cor. of secs. 33 and 34, on the S. bdy. of the Tp., monumented with a 2 in. iron post, set, mkd. and witnessed as described in the official record.
- N. 0° 02' W., bet. secs. 33 and 34.
- Over level desert, through medium growth of shadscale.
- 40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 33 and 34.
Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 22 ins. in the ground, with brass cap mkd.
- T1N R12W
*
S33|S34
1961
- Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.
- From this cor., the south center of air strip, monumented with a wooden hub, 1 in. below ground, bears N. 36° 19' 45" E. 10.79 chs. dist.
- Continue over level desert.
- 48.40 Enter cleared land, at south end of airstrip, bears irregularly E. and W.
- 64.40 Leave cleared land, bears irregularly N. and S.
- 80.00 Point for the cor. of secs. 27, 28, 33 and 34.
Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 22 ins. in the ground, with brass cap mkd.
- T1N R12W
S28|S27
S33|S34
1961
- Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.
- Land, level desert.
Soil, heavy clay.
Vegetation, medium small shadscale.
-
- N. 0° 02' W., bet. secs. 27 and 28.
- Over level desert through medium growth of small shadscale.
- 24.00 Road, dirt, bears irregularly N. and S.
- 39.70 Road, gravel, bears E. and W.

Chains

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 27 and 28.
Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 22 ins. in the ground, with brass cap mkd.

T1N R12W
 $\frac{1}{4}$
S28|S27
1961

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.
Continue over level desert.

80.00 Point for the cor. of secs. 21, 22, 27 and 28.
Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 22 ins. in the ground, with brass cap mkd.

T1N R12W
S21|S22
S28|S27
1961

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.
Land, level desert.
Soil, heavy clay.
Vegetation, medium shadscale.

N. $0^{\circ} 02'$ W., bet. secs. 21 and 22.

Over level desert through medium small shadscale.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 21 and 22.
Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 22 ins. in the ground, with brass cap mkd.

T1N R12W
 $\frac{1}{4}$
S21|S22
1961

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.
From this cor., the north center of air strip, monumented with a wood hub, 1 in. below ground, bears S. $52^{\circ} 17' 40''$ E., 17.03 chs. dist.

Note: Graded air strip is 2.80 chs. wide.

Continue over level desert.

44.80 Road, dirt, bears N. 5° E. and S. 5° W.

65.90 Road, dirt, bears NW. and SE.

76.00 Road, dirt, bears E. and W.

80.00 Point for the cor. of secs. 15, 16, 21 and 22.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 22 ins. in the ground, with brass cap mkd.

Survey of a Portion of the Subdivision of T. 1 N., R. 12 West

Chains

T1N R12W

S16|S15S21|S22

1961

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Land, level desert.

Soil, heavy clay.

Vegetation, medium growth of small shadscale.

N. 0° 02' W., bet. secs. 15 and 16.

Over level desert through medium growth of small shadscale.

6.30 Road, gravel, bears E. and W.

40.00 Point for the $\frac{1}{2}$ sec. cor. of secs. 15 and 16.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 22 ins. in the ground, and in a collar of stone, with brass cap mkd.

T1N R12W

 $\frac{1}{2}$ S16|S15

1961

Deposit broken glass alongside iron post.

Continue over level desert.

53.70 Road, gravel, bears N. 20° W. and S. 20° E.

75.60 Road, dirt, bears NE. and SW.

80.00 Point for the cor. of secs. 9, 10, 15 and 16.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 22 ins. in the ground, with brass cap mkd.

T1N R12W

S 9|S10S16|S15

1961

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Land, level desert.

Soil, heavy clay.

Vegetation, medium growth of small shadscale.

N. 0° 02' W., bet. secs. 9 and 10.

Over level desert through medium growth of small shadscale.

2.70 Road, gravel, bears NW. and SE.

16.50 Road, dirt, bears NE. and SW.

22.50 Road, dirt, bears NE. and SW.

Survey of a Portion of t Subdi f.

Chains

34.40 Road, dirt, bears NE. and SW.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 9 and 10.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 22 ins. in the ground, with brass cap mkd.

T1N R12W

$\frac{1}{4}$

S 9 | S10

1961

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Continue over level desert.

80.00 Point for the cor. of secs. 3, 4, 9 and 10.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 22 ins. in the ground, with brass cap mkd.

T1N R12W

S4 | S3

S9 | S10

1961

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Land, level desert.

Soil, heavy clay.

Vegetation, medium growth of small shadscale.

N. $0^{\circ} 14'$ W., bet. secs. 3 and 4.

Over level desert through medium growth of small shadscale.

2.50 Road, dirt, bears N. 10° E. and S. 10° W.

21.80 Road, dirt, bears N. 10° W. and S. 10° E.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 3 and 4.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 22 ins. in the ground, with brass cap mkd.

T1N R12W

$\frac{1}{4}$

S 4 | S 3

1961

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor. Deposit broken glass alongside iron post.

Continue over level desert.

80.00 Point for the $\frac{1}{16}$ sec. cor. of secs. 3 and 4.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 22 ins. in the ground, with brass cap mkd.

T1N R12W

$\frac{1}{16}$

S 4 | S 3

80

1961

Survey of a Portion of the Subdivision of T. 1 N., R. 12 W.

Chains

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

85.54 The cor. of secs. 3, 4, 33 and 34, on the N. bdy. of the Tp., monumented with a 2 in. iron post, set, mkd. and witnessed as described in the official record.

Land, level desert.

Soil, heavy clay.

Vegetation, medium growth of small shadscale.

From the cor. of secs. 1, 2, 35 and 36 on the N. bdy. of the Tp., monumented with a 2 in. iron post, set, mkd. and witnessed as described in the official record.

S. 0° 01' E., bet. secs. 1 and 2.

Over gently rolling land through moderate shadscale.

5.28 Point for the 1/16 sec. cor. of secs. 1 and 2.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T1N R12W

$\frac{1}{16}$

16

S 2 | S 1

80

1961

Raise a mound of stone, 2½ ft. base, 2 ft. high, W. of cor.

45.28 Point for the ¼ sec. cor. of secs. 1 and 2.

Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd.

T1N R12W

$\frac{1}{4}$

S 2 | S 1

1961

Raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

Continue over gently rolling desert land.

85.28 Point for the cor. of secs. 1, 2, 11 and 12, at a point calculated to be bet. the cor. of secs. 3, 4, 9 and 10 and the cor. of secs. 1, 6, 7 and 12.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T1N R12W

S 2 | S 1

S11 | S12

1961

Raise a mound of stone, 3 ft. base, 1½ ft. high, W. of cor.

Land, gently rolling desert.

Soil, sandy clay.

Undergrowth, moderate shadscale.

Chains

From the cor. of secs. 2, 3, 34 and 35, on the N. bdy. of the Tp., monumented with a 2 in. iron post, set, mkd. and witnessed as described in the official record.

S. 0° 02' E., bet. secs. 2 and 3.

Over rolling desert land through moderate shadscale.

Asc. 20 ft. over gentle NW. slope.

5.41 Point for the 1/16 sec. cor. of secs. 2 and 3.

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, with brass cap mkd.

T1N R12W

1
16

S 3 | S 2

80

1961

Raise a mound of stone, 3½ ft. base, 2 ft. high, W. of cor.

Asc. 90 ft. over gentle NW. slope.

35.50 Top of ascent, desc. 45 ft. over gentle S. slope.

45.41 Point for the ¼ sec. cor. of secs. 2 and 3.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T1N R12W

¼

S 3 | S 2

1961

Raise a mound of stone, 3½ ft. base, 2 ft. high, W. of cor.

Desc. 45 ft. over gentle S. slope.

69.50 Base of descent, thence over gently rolling land.

85.41 Point for the cor. of secs. 2, 3, 10 and 11, at a point calculated to be bet. the cor. of secs. 3, 4, 9 and 10 and the cor. of secs. 1, 6, 7 and 12.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T1N R12W

S 3 | S 2

S10 | S11

1961

Raise a mound of stone, 3½ ft. base, 2 ft. high, W. of cor.

Land, rolling desert.

Soil, sandy clay.

Undergrowth, moderate shadscale.

From the cor. of secs. 1, 2, 11 and 12.

Survey of a Portion of the Subdivision of T. 1 N., R. 12 W.

Chains

S. 89° 51' W., bet. secs. 2 and 11.

Over gently rolling desert land through moderate shadscale brush.

39.99 Point for the $\frac{1}{4}$ sec. cor. of secs. 2 and 11.Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 22 ins. in the ground, with brass cap mkd.

TLN R12W

 $\frac{1}{4}$ S2

S11

1961

Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

Continue over gently rolling land.

79.98 The cor. of secs. 2, 3, 10 and 11.

Land, gently rolling desert.

Soil, sandy clay.

Undergrowth, moderate shadscale.

From the cor. of secs. 15, 16, 21 and 22.

West, bet. secs. 16 and 21.

Over level desert land through medium growth of small shadscale.

15.10 Dirt road, bears S. 20° E. and N. 20° W.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 16 and 21.Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 22 ins. in the ground, with brass cap mkd.

TLN R12W

 $\frac{1}{4}$ S16

S21

1961

Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.

Continue over level desert.

48.20 Leave level desert, asc. 20 ft. over low clay knolls.

51.00 Low clay hill, bears N. 10° W. and S. 10° E., desc. 20 ft. over gentle W. slope.

61.40 Leave low clay knolls, enter level, barren mud flats, bears irregularly N. 15° W. and S. 15° E.

80.00 Point for the cor. of secs. 16, 17, 20 and 21.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:

TLN S16 on NE., R12W S21 on SE., S20 on SW. and S17 on NW. faces, with 3 notches on S. and 4 on E. edges. Dig pits, 18x18x12 ins., in each sec., 4 ft. dist.

Chains

Land, level and gently rolling desert.
Soil, alkaline clay.
Undergrowth, medium growth of small shadscale.

N. $0^{\circ} 03'$ W., bet. secs. 16 and 17.

Over level, barren mud flats.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 16 and 17.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:

T1N on N., S16 on E., R12W on S. and $\frac{1}{4}$ S17 on W. faces.
Dig pits, 18x18x12 ins., N. and S. of cor., 4 ft. dist.
and raise a mound of earth, 3 ft. high, W. of cor.

Continue over level, barren mud flats.

80.00 Point for the cor. of secs. 8, 9, 16 and 17.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:

T1N S9 on NE.; R12W S16 on SE., S17 on SW. and S8
on NW. faces, with 4 notches on the S. and E. edges.
Dig pits, 18x18x12 ins. in each sec., 4 ft. dist.

Land, level, barren mud flats.
Soil, alkaline clay.
Vegetation, none.

From the cor. of secs. 9, 10, 15 and 16.

N. $89^{\circ} 59'$ W., bet. secs. 9 and 16.

Over low, rolling clay knolls, through medium growth of small shadscale.

4.30 Gravel road, bears N. and S.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 9 and 16.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 22 ins. in the ground, with brass cap mkd.

T1N R12W

$\frac{1}{4}$ $\frac{S 9}{S16}$

1961

Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.

Desc. 25 ft. over gentle W. slope.

46.70 Bottom of descent, asc. 20 ft. over gentle E. slope.

62.70 Low clay ridge, bears irregularly N. and S., desc. 35 ft. over gentle W. slope.

69.00 Leave low rolling clay hills, enter level, barren mud flats, bears irregularly N. and S.

Survey of a Portion of the Subdivision of T. 1 N. R. 12 W.

Chains

80.00 The cor. of secs. 8, 9, 16 and 17.

Land, low, rolling clay knolls E. 69.00 chs.; level, barren mud flats, W. 11.00 chs.

Soil, alkaline clay.

Undergrowth, medium growth of small shadscale E. 69.00 chs.; none W. 11.00 chs.

From the standard cor. of secs. 32 and 33, on the S. bdy. of the Tp. (Salt Lake Base Line), monumented with a volcanic stone, 7x8x18 ins. firmly set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

SC

T1N R12W

S32|S33

1961

Dig pits, 18x18x12 ins., N., E. and W. of cor., 4 ft. dist. and raise a mound of earth, 3 ft. base, 2 ft. high, N. of cor.

N. 0° 03' W., bet. secs. 32 and 33.

Over level desert through scattered small shadscale.

32.00 Leave vegetation, enter level, barren mud flats, bears irregularly N. and S.

40.00 Point for the ¼ sec. cor. of secs. 32 and 33.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:

T1N on N., S33 on E., R12W on S. and ¼ S32 on W. faces.

Dig pits, 18x18x12 ins., N. and S. of cor., 4 ft. dist.

and raise a mound of earth, 3 ft. base, 2 ft. high, W. of cor.

Continue over level barren mud flats.

80.00 Point for the cor. of secs. 28, 29, 32 and 33.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:

T1N S28 on NE., R12W S33 on SE., S32 on SW. and S29

on NW. faces, with 1 notch on S. and 4 on E. edges.

Dig pits, 18x18x12 ins. in each sec., 4 ft. dist.

Land, level desert S. 30.00 chs.; level, barren mud flats N. 50.00 chs.

Soil, alkaline clay.

Undergrowth, scattered shadscale S. 30.00 chs.; none N. 50.00 chs.

From the standard cor. of secs. 31 and 32 on the S. bdy. of the Tp., (Salt Lake Base Line), monumented with a fir post, 4x4 ins., 10 ins. above ground, plainly mkd. as described in the official record.

N. 0° 04' W., bet. secs. 31 and 32.

Over level desert through widely scattered small salt brush and low hummocks.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 31 and 32.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:

T1N on N., S32 on E., R12W on S. and $\frac{1}{4}$ S31 on W. faces.
 Dig pits, 18x18x12 ins., N. and S. of cor., 4 ft. dist.
 and raise a mound of earth, 3 ft. base, 2 ft. high,
 W. of cor.

Continue over level desert.

80.00 Point for the cor. of secs. 29, 30, 31 and 32.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:

T1N S29 on NE., R12W S32 on SE., S31 on SW. and S30 on NW. faces, with 1 notch on S. and 5 on E. edges. Dig pits, 18x18x12 ins. in each sec., 4 ft. dist.

Land, level desert.
 Soil, alkaline clay.
 Undergrowth, widely scattered small salt brush.

From the cor. of secs. 28, 29, 32 and 33.

West, bet. secs. 29 and 32.

Over level barren desert.

39.99 Point for the $\frac{1}{4}$ sec. cor. of secs. 29 and 32.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:

$\frac{1}{4}$ S29 on N., T1N on E., S32 on S. and R12W on W. faces.
 Dig pits, 18x18x12 ins., E. and W. of cor., 4 ft. dist.
 and raise a mound of earth, 3 ft. base, 2 ft. high, N.
 of cor.

Continue over level, barren desert.

79.98 The cor. of secs. 29, 30, 31 and 32.

Land, level, barren desert.
 Soil, alkaline clay.
 Vegetation, none.

General Description

Township 1 North, Range 12 West, lies about 4 miles northeast of Knolls, Utah, on the east edge of the Great Salt Lake Desert. The east portion of the township is rolling bench land covered with a medium growth of small shadscale brush. The soil in this portion is sandy, alkaline clay, and the elevation is from 4200 ft. to 4600 ft. above sea level. There is a landing strip in the south central portion of the township, and a gravel road bears nearly north and south through the center of the township. The west portion of the township is mostly level, barren desert, with heavy alkaline clay soil and no vegetation. The elevation of this portion is about 4200 ft. above sea level. The area is drained in a westerly direction. No water or permanent habitations was noted in the township.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS

| NAMES | CAPACITY |
|---------------------|------------------------|
| Boyd S. Owens | Crew Chief, Transitman |
| Dan V. Coleman | Chainman, notes |
| LaVern Griffin | Chainman |
| Anthony V. Coombs | Flagman |
| Douglas L. McInelly | Cornerman |
| | |
| Leonard W. Murphy | Crew Chief, notes |
| Paul G. Bauer | Transitman |
| Dennis Badger | Flagman |
| Ashley D. Allen | Chainman |
| John D. Carter | Cornerman |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |

CERTIFICATE OF SURVEY

I, Woodrow H. Sylvester, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 22 day of August, 1960, I have supervised the survey of a portion of the subdivision of Township 1 North, Range 12 West,

of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by me and under my supervision; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

August 23, 1963

(Date)

Woodrow H. Sylvester (Cadastral Surveyor)

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT, Washington, D. C. OCT 3 1963

The foregoing field notes of the survey of a portion of the subdivision of Township 1 North, Range 12 West, Salt Lake Meridian, Utah,

executed by Boyd S. Owens and Leonard W. Murphy, Cadastral Surveyor and Survey Technician, under the supervision of Woodrow H. Sylvester, Cadastral Surveyor, having been critically examined and found correct, are hereby approved.

Clark I. Gumm Acting (Chief, Division of Engineering)

(Date)

CERTIFICATE OF TRANSCRIPT

I CERTIFY That the foregoing transcript of the field notes of the above-described surveys in, is a true copy of the original field notes.

(Date)

(Chief, Division of Engineering)

NOV 6 3 35 PM 1967

RECEIVED
STATE & LAND OFFICE
SALT LAKE CITY

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

ORIGINAL

FIELD NOTES

DEPENDENT RESURVEY OF A PORTION

OF THE SEVENTH STANDARD PARALLEL SOUTH

IN RANGE 14 WEST

A

PORTION OF THE WEST BOUNDARY

OF TOWNSHIP 36 SOUTH, RANGE 13 WEST

AND A PORTION OF THE SUBDIVISION

THE SURVEY

OF A PORTION OF THE SUBDIVISION

OF TOWNSHIP 36 SOUTH, RANGE 14 WEST

Of the SALT LAKE Meridian,

in the State of UTAH

EXECUTED BY

Leonard W. Murphy - Survey Technician

Under the supervision of Woodrow H. Sylvester - Cadastral Surveyor

Under special instructions dated September 18, 1959, which provided

for the surveys included under Group No. 431, approved September 28, 1959

and assignment instructions dated August 14, 1961

Survey commenced August 17, 1961

Survey completed September 14, 1961

INDEX DIAGRAM

Township 36 SOUTH, Range 14 WEST

| | | | | | | |
|----|----|-------|-------|------|----|---|
| | | | | | | |
| | | | 4 | 4 | 3 | 2 |
| 6 | 5 | 4 | 19 8 | 22 2 | 1 | 9 |
| | | | | 23 | | |
| 7 | 8 | 9 | 18 10 | 11 | 12 | 7 |
| | | 25 | | | | |
| 18 | 17 | 24 16 | 17 16 | 14 | 18 | 5 |
| | | 16 | 13 | 12 | 10 | |
| 19 | 20 | 21 | 22 | 23 | 24 | |
| 29 | 30 | 28 | 27 | 26 | 25 | |
| 31 | 32 | 33 | 34 | 35 | 36 | |

GPO 866119

Original Survey 

Dependent Resurvey 

Township 36 South, Range 14 West

Chains

The east 3 miles of the north boundary (Seventh Standard Parallel South), the south 4 miles of the west boundary, the south and east boundaries and a portion of the subdivision was surveyed by A. J. Stewart Jr. in 1873. The west 3 miles of the north boundary (Seventh Standard Parallel South), were surveyed by A. J. Stewart Jr. in 1874. The Seventh Standard Parallel South was independently resurveyed, and the north 2 miles of the west boundary surveyed by Frank T. Roberts in 1909.

The following field notes are those of a dependent resurvey of the east 3 1/2 miles of the Seventh Standard Parallel South in Range 14 West, the north 3 miles of the west boundary of T. 14 S., R. 13 E., a portion of subdivision and the survey of a portion of the subdivision of T. 14 S., R. 14 W., deemed sufficient in extent to facilitate development of the natural resources and mark the boundaries of those sections that normally are considered state school sections.

Before restoring the corners, the lines of the original survey were retraced and diligent search made for any evidence of the original corners or other calls of the original field notes record. The rules of proportionate measurement were applied to ascertain the position of the lost corners after exhausting every reasonable possibility of finding direct evidence of the lost corner.

The survey was executed with W. and L. E. Gurley Solar Transit No. 570628 constructed in accordance with the standard instrumental specifications of the Bureau of Land Management. The instrument was in good condition prior to the beginning of the survey and was maintained in proper adjustment throughout the progress of this survey.

Corners on east-west lines were set on the true latitudinal curve. Lines connecting previously established corners were run by random and true method, but for simplification of the record the random lines are omitted from the field notes. In accordance with the intent of the special instructions, all subdivisional corners established are calculated to be at the position they would occupy if the entire township were subdivided.

Measurements herein contained were made with a narrow steel tape, 8 chains in length, graduated every link for the first 100 links and thereafter at intervals of 10 links. The tape was tested by comparison with a one chain standard steel tape and found to be correct. Measurements were made on the slope with the vertical angle of each interval ascertained by a clinometer in good adjustment; horizontal equivalents alone are entered in the field notes. All lines of this survey were run by direct method where the lines were accessible; lines inaccessible were run by traverse or triangulation methods. Distances to topography on lines run by traverse or triangulation are approximately as scaled from U. S. G. S. topographic sheets. The details of such traverses or triangulations have been thoroughly checked and verified, and in order to simplify the record the diagrams and reductions are omitted from these field notes.

The direction of the lines of this survey were determined by reference to true meridians established on line by altitude observations on the sun. The lines were carried forward by sustained angulation being supplemented by other numerous altitude observations on the sun taken throughout the progress of the survey.

The geographic position for the southeast corner of Section 13 is at latitude 37° 39' 46.2" N. and longitude 113° 21' 44.5" W. as scaled from U. S. G. S. Quadrangle "Desert Mound".

The magnetic declination was read at a number of stations throughout the township and the average of these readings was found to be 16° east.

Dependent Resurvey of a Portion of the S. Bdy., T. 35 S., R. 14 W.,
 with Stan. Par. S.

Chains

Dependent Resurvey of a Portion of the South Boundary, Township 35
 South, Range 14 West, (Seventh Standard Parallel South)

Reestablishment of the independent resurvey executed by Frank T.
 Roberts in 1909.

The original standard Tp. cor. of T. 35 S., Rs. 13 and 14 West,
 monumented with a sandstone, 8x10x18 ins., set, mkd. and witnessed
 as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground,
 and in a collar of stone, with brass cap mkd.

SC
 T35S
 R14W R13W
S36|S31
 1961

Bury original cor. alongside iron post.

From this cor., the original standard cor. of secs. 31 and 32,
 T. 35 S., R. 13 W., bears S. 89° 47' E., 82.34 chs. dist., monumente
 with a limestone, 4x8x14 ins., set, mkd. and witnessed as described
 in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground,
 with brass cap mkd.

S C
 T35S R13W
S31|S32
 1961

Bury original cor. alongside iron post.

Raise a mound of stone, 3½ ft. base, 2 ft. high, N. of cor.

From the same standard Tp. cor., the point for the standard ¼ sec.
 cor. of sec. 31, T. 35 S., R. 13 W., bears S. 89° 47' E., 41.17 chs.
 dist. (proportionate dist.) There is no evidence of the original
 cor.

At the proportionate point.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground
 with brass cap mkd.

S C
 T35S R13W
 ¼ S31
 1961

Raise a mound of stone, 3½ ft. base, 3 ft. high, N. of cor.

From the above standard Tp. cor.

N. 89° 43' W. along the S. bdy. of sec. 36.

Over gentle rolling hills, covered with sage brush, asc. gentle E.
 slope.

Dependent Resurvey of a Portion of the S. Bdy., T. 35 S., R. 14 W.,
(7th Stan. Par. S.)

| Chains | |
|---|--|
| 2.50 | Enter scattered juniper; asc. 100 ft. over gentle E. slope. |
| 27.50 | Base of steep ascent; bears N. and SW.; asc. 70 ft. over SE. slope. Enter broken land, low hills. |
| 32.50 | Low spur, slopes SE.; desc. 30 ft. over SW. slope. |
| 37.50 | Small draw, drains SE.; asc. 20 ft. over E. slope. |
| 40.13 | The standard $\frac{1}{4}$ sec. cor. of sec. 36, monumented with an iron post, 1 in. diam., set, mkd. and witnessed as described in the official record. |
| N. 89° 27' W. beginning new measurement. | |
| Asc. 115 ft. over E. slope. | |
| 11.00 | Ridge, bears NE. and S.; desc. 20 ft. over W. slope. |
| 13.00 | Small ravine, drains NE.; asc. 80 ft. over E. slope. |
| 22.30 | Spur, slopes N.; desc. 110 ft. over W. slope. |
| 36.60 | Wash, 15 lks. wide, 3 ft. deep, drains N.; asc. along gentle N. slope. |
| 40.03 | The standard cor. of secs. 35 and 36, monumented with an iron post, 3 ins. diam., set, mkd. and witnessed as described in the official record. |
| Land, rolling to broken. | |
| Soil, gravelly. | |
| Timber, scattered juniper, | |
| Undergrowth, sagebrush. | |
| N. 89° 47' W. along the S. bdy. of sec. 35. | |
| Over broken land, through scattered juniper; asc. along gentle N. slope. | |
| 2.40 | Small wash, drains NE. |
| 2.60 | Unimproved road bears NE. and SW. |
| 17.50 | Wash, 2 ft. deep, 20 lks. wide, drains NE. |
| 20.60 | Unimproved road, bears NE. and SW. |
| 25.80 | Wash, 5 ft. deep, 30 lks. wide, drains NE.; asc. 80 ft. over E. slope. |
| 39.80 | The standard $\frac{1}{4}$ sec. cor. of sec. 35, monumented with an iron post, 1 in. diam., set, mkd. and witnessed as described in the official record. |
| S. 89° 54' W. beginning new measurement. | |
| Asc. 60 ft. over E. slope. | |

Dependent Resurvey of a Portion of the S. Bdy., T. 35 S., R. 14 W.
7 h. n. ar. S.

Chains

- 8.70 Spur, slopes NE.; desc. 40 ft. over NW. slope.
- 14.10 Hollow, drains NE.; asc. 40 ft. over NE. slope.
- 18.50 Spur, slopes N.; desc. 40 ft. over NW. slope.
- 26.00 Small ravine, drains N.; asc. 140 ft. over NE. slope.
- 38.00 Slope changes; asc. along N. slope.
- 40.41 The standard cor. of secs. 34 and 35, monumented with an iron post, 3 ins. diam., set, mkd. and witnessed as described in the official record.

Land, broken.
Soil, gravelly.
Timber, juniper and pinon.
Undergrowth, sagebrush.

S. 89° 56' W. along the S. bdy. of sec. 34.

Over mountainous land, through medium growth of timber; asc. 80 ft. along N. slope.

- 16.00 Hollow, 75 ft. deep, drains N.; asc. 100 ft. over NE. slope.
- 27.00 Spur, slopes N.; desc. 50 ft. over W. slope.
- 31.00 Small ravine, drains N.; asc. 90 ft. over E. slope.
- 36.00 Rocky spur, slopes NE.; desc. 65 ft. over NW. slope.
- 40.22 The standard $\frac{1}{4}$ sec. cor. of sec. 34, monumented with an iron post, 1 in. diam., set, mkd. and witnessed as described in the official record.

N. 89° 45' W. beginning new measurement.

Desc. 20 ft. over NW. slope.

- 2.00 Small hollow, drains N.; asc. 20 ft. over E. slope.
- 4.20 Small spur, slopes N.; asc. along N. slope.
- 6.50 Ravine, curves NE. from N.; asc. 380 ft. over irregular SE. slope.
- 27.00 E. rim of small bench, bears S. and curves NW.; asc. 20 ft. along gentle N. slope on top of bench.
- 40.24 The standard cor. of secs. 33 and 34, monumented with an iron post, 3 ins. diam., set, mkd. and witnessed as described in the official record.

Land, broken.
Soil, gravelly and rocky.
Timber, juniper and pinon.

S. 89° 35' W. along the S. bdy. of sec. 33.

Dependent Resurvey of a Portion of the South Bdy., T. 35 S., R. 14 W.,
(7th Stan. Par. S.)

Chains

Over broken land, on top of small bench, through medium growth of timber, along gentle N. slope.

9.60 W. rim of small bench, bears irregularly S. and curves NW.; desc. 140 ft. over SW. slope.

18.30 Small ravine, drains N. 80° W.; desc. 15 ft. along N. slope in ravine.

26.00 Wash, drains N. 20° W.; asc. 10 ft. along N. slope.

31.50 Unimproved road, bears N. 10° E. and S. 10° W.; asc. 75 ft. over E. slope.

40.45 The standard $\frac{1}{4}$ sec. cor. of sec. 33, monumented with an iron post, 1 in. diam., set, mkd. and witnessed as described in the official record.

Land, broken.
Soil, gravelly and rocky.
Timber, juniper and pinon.

Dependent Resurvey of a Portion of the West Boundary of
Township 36 South, Range 13 West

Reestablishment of the survey executed by A. J. Stewart, Jr. in 1873, with original cors. remonumented for T. 36 S., R. 13 W., and established thereon of new cors. at regular intervals of latitude for T. 36 S., R. 14 W.

From the original cor. of secs. 13, 18, 19 and 24, T. 36 S., Rs. 13 and 14 W., monumented with a granite stone, 4x8x16 ins., set, mkd. as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 16 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top with brass cap mkd.

| | |
|-----------|-----|
| T36S | |
| R14W R13W | |
| S13 | S18 |
| S24 | S19 |
| 1961 | |

from which

A juniper, 12 ins. diam., bears N. 32° 45' E., 47 lks. dist., mkd. T36S R13W S18 BT.

A juniper, 16 ins. diam., bears S. 88° 30' E., 22 lks. dist., mkd. T36S R13W S19 BT.

A juniper, 5 ins. diam., bears S. 72° 45' W., 31 lks. dist., mkd. T36S R14W S24 BT.

A juniper, 11 ins. diam., bears N. 30° 30' W., 16 lks. dist., mkd. T36S R14W S13 BT.

N. 0° 56' E. along the W. bdy. of sec. 18.

Over partly broken land, through heavy growth of juniper; desc. NE. slope.

Dependent Resurvey of a Portion of the W. Bdy. of T. 36 S., R. 13 W.

Chains

.60 Unimproved road, bears E. and W.

1.80 Shallow wash, drains N. 20° E., 155 ft. over NE. slope.

40.01 Point for the $\frac{1}{4}$ sec. cor. of sec. 13, T. 36 S., R. 14 W.Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T36S
R14W R13W
 $\frac{1}{4}$ S13|
1961

from which

A juniper, 14 ins. diam., bears S. 74° 30' W., 75 lks. dist., mkd. T36S R14W S13 BT.

A juniper, 9 ins. diam., bears N. 68° 45' W., 86 lks. dist., mkd. S13 BT.

Raise a mound of stone, 4 ft. base, 3 ft. high, W. of cor.

40.60 The original $\frac{1}{4}$ sec. cor. of secs. 13 and 18, monumented with a granite stone, 8x8x16 ins., set and mkd. as described in the official record. This cor. will now function as the $\frac{1}{4}$ sec. cor. of sec. 18, T. 35 S., R. 13 W. only.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T36S
R14W R13W
 $\frac{1}{4}$ S18
1961

from which

A juniper, 6 ins. diam., bears N. 43° 45' E., 67 lks. dist., mkd. $\frac{1}{4}$ S18 BT.

A juniper, 5 ins. diam., bears N. 25° 45' W., 58 lks. dist., mkd. S13 BT. (Original).

Raise a mound of stone, 3 ft. base, 2 $\frac{1}{2}$ ft. high, E. of cor.

Bury original cor. alongside iron post.

N. 0° 21' W. beginning new measurement.

Over gentle rolling land, desc. 20 ft. over NE. slope.

7.00 Leave timber, enter sagebrush covered flats.

11.50 Unimproved road, bears E. and W.

14.00 Wash, 2 ft. deep, 20 lks. wide, drains E., thence along gentle E. slope.

26.60 Wash, 4 ft. deep, 15 lks. wide, drains N. 80° E.

39.41 Point for the cor. of secs. 12 and 13, T. 36 S., R. 14 W.

Dependent Resurvey of a Portion of the W. Bdy. of T. 36 S., R. 13 W.

Chains

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T36S T36S
 S12 | R13W
 S13 | S18
 R14W
 1961

Raise a mound of stone, 4 ft. base, 2 ft. high, W. of cor.

40.55 The original cor. of secs. 7, 12, 13 and 18, mkd. by a cedar post, 5 ft. long, 5 ins. diam., with faint scribe marks. This cor. will now function as the cor. of secs. 7 and 18, T. 36 S., R. 13 W. only.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T36S T36S
 R14W | S 7
 S12 | S18
 R13W
 1961

Reset wooden post alongside iron post, and raise a mound of stone, 3½ ft. base, 2½ ft. high, E. of cor.

Land, slightly broken to rolling.

Timber, juniper on S. portion; none on N. portion.

Soil, gravelly S. portion; clay loam N. portion

N. 0° 23' W. along the W. bdy. of sec. 7.

Over rolling land; asc. gentle E. slope.

8.70 Trail road, bears NW. and SE.

12.60 Telephone line, bears N. 77° E. and S. 77° W.

13.30 Bladed gravel road, bears N. 77° E. and S. 77° W.

20.00 Enter heavy growth of juniper.

31.40 Trail road, bears N. and SE.

34.50 Wash, 2 ft. deep, 20 lks. wide, drains E.

38.86 Point for the ¼ sec. cor. of sec. 12, T. 36 S., R. 14 W.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground with brass cap mkd.

T36S
 R14W R13W
 S12 |
 1961

from which

Chains

A juniper, 5 ins. diam., bears S. 39° 15' W., 53 lks. dist., mkd. ¼ S12 BT.

A juniper, 10 ins. diam., bears N. 83° 30' W., 33 lks. dist., mkd. ¼ S12 BT.

Raise a mound of stone, 3½ ft. base, 2½ ft. high, W. of cor.

40.79 The original ¼ sec. cor. of secs. 7 and 12, monumented by a granite stone, 10x10x16 ins., set and mkd. as described in the official record. This cor. will now function as the ¼ sec. cor. of sec. 7, T. 36 S., R. 13 W. only.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T36S
R14W R13W
¼ S 7
1961

from which

A juniper, 12 ins. diam., bears east, 13 lks. dist., mkd. ¼ S7 BT.

Bury original cor. alongside iron post, and raise a mound of stone 4 ft. base, 2 ft. high, E. of cor.

N. 1° 49' E. beginning new measurement.

Continue along gentle E. slope.

33.00 Base of gentle ascent, bears NE. and SW.; asc. 80 ft. over gentle SE. slope.

38.09 Point for the cor. of secs. 1 and 12, T. 36 S., R. 14 W.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T36S T36S
S 1 | R13W
S12 | S 7
R14W
1961

from which

A juniper, 15 ins. in diam., bears S. 38° 45' W., 50 lks. dist., mkd. S12 BT.

A juniper, 13 ins. diam., bears N. 27° 30' W., 18 lks. dist., mkd. S1 BT.

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

40.80 The original cor. of secs. 1, 6, 7 and 12, monumented with a granite stone, 10x15x18 ins., set, mkd. and witnessed as described in the official record. This cor. will now function as the cor. of secs. 6 and 7, T. 36 S., R. 13 W. only.

Dependent Resurvey of a Portion of the W. Bdy. of T. 36 S., R. 13 W.

Chains

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T36S T36S.

R14W | S 6

S 1 | S 7

R13W

1961

Bury original cor. alongside iron post, and raise a mound of stone, 4 ft. base, 2 ft. high, E. of cor.

Land, rolling.

Soil, gravelly.

Timber, juniper and pinon.

Undergrowth, sagebrush.

N. $0^{\circ} 29' E.$ along the W. bdy. of sec. 6.

Over slightly broken land; asc. SE. slope.

.50 Base of steep ascent, bears E. and curves SW.; asc. 110 ft. over S. slope.

4.50 Saddle, on top of small spur which slopes E.; desc. 40 ft. over NE. slope.

9.30 Small ravine, drains NE.; desc. 130 ft. over NE. slope.

29.10 Wash, 6 ft. deep, 20 lks. wide, drains NE.; desc. gentle NE. slope.

37.29 Point for the $\frac{1}{4}$ sec. cor. of sec. 1, T. 36 S., R. 14 W.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T36S

R14W R13W

 $\frac{1}{4}$ S 1 |

1961

Raise a mound of stone, $3\frac{1}{2}$ ft. high, 3 ft. base, W. of cor.

40.14 The original $\frac{1}{4}$ sec. cor. of secs. 1 and 6, monumented with a granite stone, 4x12x20 ins., set and mkd. as described in the official record. This cor. will now function as the $\frac{1}{4}$ sec. cor. of sec. 6, T. 36 S., R. 13 W. only.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T36S

R14W R13W

 $\frac{1}{4}$ S 6 |

1961

from which

Chains

A juniper, 10 ins. diam., bears S. 80° E., 86 lks. dist., mkd. $\frac{1}{2}$ S6 BT.

A juniper, 4 ins. diam., bears N. 30° W., 12 lks. dist., mkd. BT. (original.)

Bury original cor. alongside iron post.

N. 1° 11' E. beginning new measurement.

Over gentle NE. slope.

- 3.50 Trail road, bears E. and W.; desc. 75 ft. over gentle NE. slope.
 13.00 Enter dense juniper.
 40.25 Intersect the Seventh Standard Parallel South.

Point for the closing cor. of T. 36 S., Rs. 13 and 14 W. at proportionate dist. bet. the standard Tp. cor. of T. 35 S., Rs. 13 and 14 W. and the standard cor. of secs. 31 and 32, T. 35 S., R. 13 W. No evidence of original closing cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

| | |
|-----------|------|
| T35S R13W | |
| S31 | |
| S 1 | S 6 |
| R14W | R13W |
| T36S | |
| CC | |
| 1961 | |

Raise a mound of stone, 4 ft. base, 2 ft. high, S. of cor.

From this closing cor., the standard Tp. cor. of T. 35 S., Rs. 13 and 14 W. bears N. 89° 47' W., 93 lks. dist. previously described.

Land, broken to rolling.
 Soil, gravelly.
 Timber, juniper and pinon.
 Undergrowth, sagebrush.

Dependent Resurvey of a Portion of the Subdivision of
 Township 36 South, Range 14 West

Reestablishment of the survey executed by A. J. Stewart, Jr. in 1873, with original cors. along the east 3 miles of the third latitudinal section line remonumented for the surveyed south half of the Tp. and the establishment thereon of new cors. at regular intervals westing for the unsurveyed north half of the Tp.

From the cor. of secs. 13, 18, 19 and 24, on the E. bdy. previously described.

N. 89° 44' W. along the N. bdy. of sec. 24.

Dependent Resurvey of a Portion of the Subdivision of T. 36 S., R. 14 W.

Chains

Over rolling land, through scattered patches of juniper; asc. 85 ft. along general N. slope.

25.60 Bladed road, bears SW. and curves NE.

33.50 Old wood road, bears N. and S; desc. 20 ft. along gentle N. slope.

40.00 Point for the S. $\frac{1}{4}$ sec. cor. of sec. 13.

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T36S R14W
 $\frac{1}{4}$ S13
1961

Raise a mound of stone, 3 $\frac{1}{2}$ ft. base, 2 ft. high, N. of cor.

40.60 The original $\frac{1}{4}$ sec. cor. of secs. 13 and 24, monumented with a mound of stone and a 4x4 in. cedar post, 5 ft. long in center. Mining claims of the Columbia Iron Mining Co. have accepted this as the original cor. This cor. will now function as the N. $\frac{1}{4}$ sec. cor. of sec. 24 only. (Record calls for mkd. stone.)

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

$\frac{1}{4}$ S24
T36S R14W
1961

Raise a mound of stone, 3 $\frac{1}{2}$ ft. base, 2 ft. high, S. of cor.

N. 89° 36' W. beginning new measurement.

Desc. 30 ft. along gentle N. slope.

8.50 Small wash, drains NW.; asc. along gentle N. slope.

18.50 Wood road, bears N. and S.

39.37 The original cor. of secs. 13, 14, 23 and 24, monumented with a limestone, 6x8x16 ins. firmly set in mound of stone, no visible markings. Columbia Mining Co. has accepted this as the original cor. This cor. will now function as the cor. of secs. 23 and 24 only.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground with brass cap mkd.

S23 | S24
T36S | R14W
1961

from which

A juniper, 8 ins. diam., bears S. 31° 30' E., 7 lks. dist., mkd. S24 BT.

Chains

A juniper, 8 ins. diam., bears S. 73° W., 46 lks. dist., mkd. S23 BT.

Bury original cor. alongside iron post.

Land, rolling.
Soil, gravelly and rocky.
Timber, patches of juniper and pinon.

N. 89° 58' W. along the N. bdy. of sec. 23.

Over broken land, through patches of juniper; asc. NE. slope.

.03 Point for the cor. of secs. 13 and 14.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T36S R14W
S14 | S13
1961

from which

A juniper, 8 ins. diam., bears N. 42° 30' E., 42 lks. dist., mkd. S13 BT.

A juniper, 6 ins. diam., bears N. 45° W., 40 lks. dist., mkd. S14 BT.

Asc. 30 ft. over NE. slope.

17.50 Wash, 3 ft. deep, 20 lks. wide, drains N. 20° E.; asc. 110 ft. over gentle E. slope.

36.00 Base of steep ascent, bears N. and S.; asc. 100 ft. over steep E. slope.

39.76 Point for the original ¼ sec. cor. of secs. 14 and 23 at proportionate dist. This cor. will now function as the ¼ sec. cor. of sec. 23 only. No evidence of original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground with brass cap mkd.

¼ S23
T36S R14W.
1961

Raise a mound of stone, 4 ft. base, 2 ft. high, S. of cor.

40.03 Point for the S. ¼ sec. cor. of sec. 14.

Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T36S R14W
¼ S14
1961

from which

Dependent Resurvey of a Portion of the Subdivision of T. 36 S., R. 14 W.

Chains

A juniper, 14 ins. diam., bears N. 27° E., 18 lks. dist., mkd. T36S R14W S14 BT.

A pinon, 12 ins. diam., bears N. 12½° W., 19 lks. dist., mkd. S14 BT.

Raise a mound of stone, 3½ ft. base, 2 ft. high, N. of cor.

Asc. 220 ft. over steep and ledgy E. slope.

42.70 Rocky rim, bears N. and S.

50.00 Spur, slopes N.; desc. 45 ft. over W. slope.

56.60 Hollow, drains N.; asc. 90 ft. over E. slope.

63.20 Ridge, bears N. and S.; desc. 130 ft. over W. slope.

78.50 Small wash, drains N. 10° W.; asc. gentle NE. slope.

79.52 The original cor. of secs. 14, 15, 22 and 23, monumented with a granite stone, 4x10x12 ins. in small mound of stone, no visible markings, only rock in area. This cor. will now function as the cor. of secs. 22 and 23 only.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

| | |
|------|------|
| S14 | |
| S22 | S23 |
| T36S | R14W |
| 1961 | |

from which

A pinon, 7 ins. diam., bears S. 62° 30' E., 25 lks. dist., mkd. S23 BT

A juniper, 12 ins. diam., bears S. 21° 30' W., 39 lks. dist., mkd. S22 BT.

Bury original cor. alongside iron post, and raise a mound of stone 2½ ft. base, 2 ft. high, S. of cor.

Land, broken.

Soil, gravelly.

Timber, patches of juniper and pinon.

S. 87° 19' W. along the N. bdy. of sec. 22.

Over broken land, through patches of juniper and pinon, asc. gentle NE. slope.

.51 Point for the cor. of secs. 14 and 15.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

| | |
|-----------|-----|
| T36S R14W | |
| S15 | S14 |
| S22 | |
| 1961 | |

Chains

from which

A pinon, 5 ins. diam., bears N. 75° 45' W., 25 lks. dist.,
mkd. S15 BT.

A juniper, 9 ins. diam., bears N. 8° 15' E., 67 lks. dist.,
mkd. S14 BT.

Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.

Asc. 80 ft. over NE. slope.

16.00 Ridge, bears NW. and SE.; desc. 360 ft. over steep and ledgy SW.
slope of Red Hills.

32.60 Base of major descent, bears NW. and SE.; desc. 40 ft. over NE. slope

39.91 Point for the original $\frac{1}{4}$ sec. cor. of secs. 15 and 22, at propor-
tionate dist. This cor. will now function as the $\frac{1}{4}$ sec. cor. of
sec. 22 only. There is no evidence of original cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground,
and in a collar of stone, with brass cap mkd.

$\frac{1}{4}$ S22
T36S R14W
1961

from which

A pinon, 8 ins. diam., bears S. 77° W., 14 lks. dist., mkd.
 $\frac{1}{4}$ S22 BT.

A pinon, 6 ins. diam., bears S. 24° 45' W., 20 lks. dist.,
mkd. $\frac{1}{4}$ S22 BT.

40.55 Point for the S. $\frac{1}{4}$ sec. cor. of sec. 15.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground,
with brass cap mkd.

T36S R14W
 $\frac{1}{4}$ S15
1961

from which

A pinon, 10 ins. diam., bears N. 71° 15' W., 37 lks. dist.,
mkd. $\frac{1}{4}$ S15 BT.

A pinon, 8 ins. diam., bears N. 0° 45' W., 71 lks. dist.,
mkd. $\frac{1}{4}$ S15 BT.

Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.

Desc. 130 ft. over SW. slope.

61.50 Leave timber, enter sagebrush with widely scattered juniper.

79.82 The original cor. of secs. 15, 16, 21 and 22 monumented with a sand-
stone, 7x8x15 ins., set, mkd. and witnessed as described in the
official record. This cor. will now function as the cor. of secs.
21 and 22 only.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground,
with brass cap mkd.

Dependent Resurvey of a Portion of the Subdivision of T. 36 S., R. 14 W.

Chains

| | |
|------|------|
| S15 | |
| S21 | S22 |
| T36S | R14W |
| 1961 | |

Bury original cor. alongside iron post and raise a mound of stone, 4 ft. base, 2 ft. high, S. of cor.

Land, broken.

Soil, gravelly and rocky on hills, clay loam on flats.

Timber, juniper and pinon.

S. 89° 20' W. along the N. bdy. of sec. 21.

Over rolling land, ghrugh heavy growth of sagebrush; desc. gentle SW. slope.

.77 Point for the cor. of secs. 15 and 16..

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

| | |
|-----------|-----|
| T36S R14W | |
| S16 | S15 |
| S21 | |
| 1961 | |

Raise a mound of stone, 3½ ft. base, 2 ft. high, N. of cor.

Desc. 20 ft. over gentle SW. slope.

2.80 Wash, 3 ft. deep, 10 lks. wide, drains SW.; desc. over gentle SW. slope.

9.10 Unimproved road, bears N. 80° W. and S. 80° E.

20.31 Point for the E. 1/16 cor. of secs. 16 and 21, at a position mid-point bet. the original cor. of secs. 15, 16, 21 and 22 and the ¼ sec. cor. of secs. 16 and 21.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

| | |
|-----------|-----|
| T36S R14W | |
| E1/16 | S16 |
| S21 | |
| 1961 | |

from which

A pinon, 6 ins. diam., bears N. 6° 15' E., 45 lks. dist., mkd. S16 BT.

A pinon, 5 ins. diam., bears S. 4° E., 99 lks. dist., mkd. S21 BT.

Raise a mound of stone, 3½ ft. base, 2 ft. high N. of cor.

Desc. 30 ft. over gentle SW. slope.

40.62 The original ¼ sec. cor. of secs. 16 and 21, monumented with a sandstone, 5x6x16 ins., set, and mkd. as described in the official record.

Chains

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins. in the ground to bedrock, and in a collar of stone, with brass cap mkd.

T36S R14W

$\frac{1}{4}$ S16

S21

1961

from which

A juniper, 7 ins. diam., bears N. $29^{\circ} 30'$ E., 14 lks. dist., mkd. $\frac{1}{4}$ S16 BT.

A juniper, 11 ins. diam., bears S. 3° E., 27 lks. dist., mkd. $\frac{1}{4}$ S21 BT.

Bury original cor. alongside iron post and raise a mound of stone, $3\frac{1}{2}$ ft. base, 2 ft. high, N. of cor.

N. $89^{\circ} 52'$ W. bet. secs. 16 and 21, beginning new measurement.

Desc. 50 ft. over gentle SW. slope.

40.50

The original cor. of secs. 16, 17, 20 and 21 monumented with a sandstone, 6x10x16 ins., set and mkd. as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T36S R14W

S17 | S16

S20 | S21

1961

from which

A juniper, 7 ins. diam., bears N. $61^{\circ} 45'$ E., 55 lks. dist., mkd. S16 BT.

A pinon, 6 ins. diam., bears N. $48^{\circ} 30'$ W., 60 lks. dist., mkd. S17 BT.

Land, rolling.

Soil, clay loam with gravel spots.

Timber, scattered juniper and pinon.

Undergrowth, sagebrush.

N. $0^{\circ} 02'$ W. bet. secs. 16 and 17.

Over rolling land, through juniper and pinon, asc. 25 ft. over gentle S. slope.

16.90

Wash, 1 ch. wide, 10 ft. deep, drains SW. from irregularly N., asc. 30 ft. over S. slope.

25.75

Same wash, drains irregularly S. from NW.; asc. 55 ft. over S. slope

Dependent Resurvey of a Portion of the Subdivision of T. 36 S., R. 14 W.

Chains

40.00 Point for the original $\frac{1}{4}$ sec. cor. of secs. 16 and 17, at record course and distance. There is no evidence of original cor.
Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T36S R14W

$\frac{1}{4}$
S17 | S16
1961

Raise a mound of stone, 4 ft. base, 3 ft. high, W. of cor.

Land, rolling.

Soil, gravelly.

Timber, juniper and pinon.

Survey of a Portion of the Subdivision of
Township 36 South, Range 14 West

From the cor. of secs. 15 and 16 previously described.

N. $0^{\circ} 01'$ W. bet. secs. 15 and 16.

Over broken land, through juniper and pinon; asc. 40 ft. over SW. slope.

10.50 Wash, 3 ft. deep, 20 lks. wide, drains SW.; asc. 40 ft. over SW. slope.

20.00 Base of steep ascent, bears W. and curves SE.; asc. 400 ft. over rocky S. slope. Enter hills.

35.40 Ridge, bears E. and W.; desc. 50 ft. over NE. slope.

40.00 Point for the $\frac{1}{4}$ sec. cor. of sec. 16 only.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T36S R14W

$\frac{1}{4}$ S16 |
1961

from which

A juniper, 6 ins. diam., bears N. $83^{\circ} 30'$ E., 46 lks. dist., mkd. S15 BT.

A pinon, 6 ins. diam., bears N. 27° W., 37 lks. dist., mkd. $\frac{1}{4}$ S16 BT.

Desc. 40 ft. over NE. slope.

43.21 Point for the $\frac{1}{4}$ sec. cor. of sec. 15 at a position 40.00 chs. southing from a calculated sec. correction line.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T36S R14W

$\frac{1}{4}$ S15 |
1961

u Port n of the

Chains

from which

A pinon, 12 ins. diam., bears N. $84^{\circ} 15'$ E., 50 lks. dist.,
mkd. $\frac{1}{2}$ S15 BT.

A pinon, 6 ins. diam., bears N. $55^{\circ} 30'$ W., 38 lks. dist.,
mkd. S16 BT.

Desc. 140 ft. over NE. slope.

56.80 Wash, drains NW.; desc. 30 ft. along W. slope.

67.50 Spur, slopes N. 20° W.; desc. 100 ft. over N. slope of spur.

83.21 Point for the cor. of secs. 9, 10, 15 and 16 at a position calculated to be on a sec. correction line extended west from the cor. of secs. 12 and 13 on the E. bdy.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T36S R14W

S 9 | S10

S16 | S15

1961

from which

A pinon, 6 ins. diam., bears S. 85° W., 14 lks. dist., mkd.
S16 BT.

A pinon, 8 ins. diam., bears N. $5^{\circ} 15'$ W., 25 lks. dist.,
mkd. S9 BT.

A juniper, 12 ins. diam., bears N. $40^{\circ} 30'$ E., 25 lks. dist.,
mkd. S10 BT.

A pinon, 12 ins. diam., bears S. 45° E., 26 lks. dist., mkd.
S15 BT.

Land, broken hills.

Soil, gravelly and rocky.

Timber, juniper and pinon.

N. $0^{\circ} 01'$ W., bet. secs. 9 and 10.

Over broken land, through juniper and pinon; desc. 20 ft. over S. slope.

7.70 Wash, in bottom of Joel Spring Canyon, 3 ft. deep, 10 lks. wide, drains W.; asc. N. slope.

8.80 Graded road, bears N. 75° E. and S. 75° W.; asc. 100 ft. over gentle S. slope.

31.50 Base of steep ascent, bears NE. and SW.; asc. 120 ft. over SE. slope

40.00 Point for the $\frac{1}{2}$ sec. cor. of secs. 9 and 10.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground with brass cap mkd.

Survey of a Portion of the Subdivision of T. 36 S., R. 14 W.

Chains

T36S R14W

¼

S 9 | S10

1961

Raise a mound of stone, 4 ft. base, 2½ ft. high, W. of cor.

Asc. 240 ft. over SE. slope.

68.00 Spur, slopes SW.; asc. 40 ft. along W. slope.

73.00 Top of ascent on W. slope, desc. 30 ft. along W. slope.

80.00 Point for the cor. of secs. 3, 4, 9 and 10.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T36S R14W

S 4 | S 3

S 9 | S10

1961

from which

A pinon, 14 ins. diam., bears S. 5° E., 10 lks. dist., mkd. T36S R14W S10 BT.

A pinon, 6 ins. diam., bears N. 4° 15' W., 28 lks. dist. mkd. S4 BT.

Raise a mound of stone, 4 ft. base, 2½ ft. high, W. of cor.

Land, broken hills.

Soil, gravelly and rocky.

Timber, juniper and pinon.

N. 0° 01' W. bet. secs. 3 and 4.

Over broken land, through pinon and juniper; desc. 10 ft. along W. slope.

5.50 Hollow, drains SW.; asc. 260 ft. over S. slope.

19.50 Ridge, bears irregularly E. and W.; asc. 30 ft. along W. slope.

32.80 Spur, slopes N. 70° W.; desc. 110 ft. over N. slope.

38.20 Small wash, drains N. 70° W.; asc. SW. slope.

40.00 Point for the ¼ sec. cor. of secs. 3 and 4.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T36S R14W

¼

S 4 | S 3

1961

from which

A pinon, 10 ins. diam., bears S, 87° E., 35 lks. dist., mkd. ¼ S3 BT.

Chains

A pinon, 6 ins. diam., bears N. 20° 30' W., 34 lks. dist., mkd. ¼ S4 BT.

Raise a mound of stone, 3½ ft. base, 2 ft. high, W. of cor.

Asc. 55 ft. over SW. slope.

- 46.00 Small spur, slopes W., thence along gentle W. slope.
- 53.20 Small draw, drains SW.
- 58.60 Small spur, slopes W.
- 74.50 Small wash, drains W.
- 83.86 Intersect N. bdy. of the Tp., (Seventh Standard Parallel South).

Point for the closing cor. of secs. 3 and 4.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T35S R14W
 S33
 S 4 | S 3
 T36S | R14W
 C.C.
 1961.

a Raise a mound of stone, 3½ ft. base, 2 ft. high, S. of cor.

From this closing cor., the standard cor. of secs. 33 and 34, T. 35 S., R. 14 W. bears N. 89° 35' E., .89 chs. dist., monumented with an iron post, 3 ins. diam., previously described.

Land, broken.
Soil, gravelly and rocky.
Timber, juniper and pinon.

Point for the cor. of secs. 1 and 2 is on the N. bdy. of the Tp., (Seventh Standard Parallel South), and is at a position calculated to be on a sectional guide meridian extended north from the cor. of secs. 13 and 14.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T35S R14W
 S35
 S 2 | S 1
 T36S | R14W
 1961

from which.

A juniper, 8 ins. diam., bears S. 70° 15' E., 41½ lks. dist., mkd. BT.

A juniper, 12 ins. diam., bears S. 62° W., 55 lks. dist., mkd. S2 BT.

From this cor., the standard cor. of secs. 35 and 36 bears S. 89° 47' E., 1.46 chs. dist. monumented with an iron post, 3 ins. diam., previously described.

Survey of a Portion of the Subdivision of T. 36 S., R. 14 W.

Chains

Point for the cor. of secs. 2 and 3 is on the N. bdy. of the Tp., (Seventh Standard Parallel South), and is at a position 80.00 chs. westing from the cor. of secs. 1 and 2.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T35S R14W

S34.

S 3 | S 2

T36S R14W

1961

Raise a mound of stone, $3\frac{1}{2}$ ft. base, 2 ft. high, S. of cor.

From this cor., the standard cor. of secs. 34 and 35, bears N. $89^{\circ} 56'$ E., 1.25 chs. dist., monumented with an iron post, 3 ins. diam., previously described.

Point for the N. $\frac{1}{4}$ sec. cor. of sec. 2 is on the N. bdy. of the Tp., (Seventh Standard Parallel South), and is midpoint bet. the cor. of secs. 1 and 2, and the cor. of secs. 2 and 3.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 16 ins. in the ground to bedrock, and in a collar of stone, with brass cap mkd.

 $\frac{1}{4}$ S 2

T36S R14W

1961

from which

A pinon, 12 ins. diam., bears S. $29^{\circ} 30'$ E., 12 lks. dist., mkd. $\frac{1}{4}$ S2 BT.

A juniper, 10 ins. diam., bears S. $72^{\circ} 30'$ W., 38 lks. dist., mkd. $\frac{1}{4}$ S2 BT.

From this cor., the standard $\frac{1}{4}$ sec. cor. of sec. 35, bears N. $89^{\circ} 54'$ E., 1.66 chs. dist., monumented with an iron post, 1 in. diam., previously described.

From the cor. of secs. 1 and 2, on the N. bdy.

South, bet. secs. 1 and 2, on a sec. guide meridian.

Over broken land, through juniper and pinon; asc. 160 ft. over gentle N. slope.

37.00 Base of steep ascent, bears E. and W.; asc. 80 ft. over N. slope.

43.66 Point for the $\frac{1}{4}$ sec. cor. of secs. 1 and 2.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 12 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T36S R14W

 $\frac{1}{4}$

S 2 | S 1

1961

Chains

dated

- Asc. 140 ft. over N. slope.
- 55.10 Spur, slopes W.; desc. 40 ft. over S. slope.
- 61.60 Small ravine, drains SW.; asc. 30 ft. over NW. slope.
- 65.00 Low spur, slopes W.; desc. 30 ft. along W. slope.
- 79.00 Small wash, drains NW.; asc. 60 ft. over NE. slope.
- 83.66 Point for the cor. of secs. 1, 2, 11 and 12, at a position calculated to be bet. the cor. of secs. 1 and 12 on the E. bdy. and the cor. of secs. 3, 4, 9 and 10.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap. mkd.

T36S R14W
S 2 | S 1
S11 | S12
1961

from which

A pinon, 6 ins. diam., bears N. 75° E., 37 lks. dist., mkd. S1 BT.

A pinon pine, 6 ins. diam., bears S. 32° 15' E., 50 lks. dist., mkd. S12 BT.

A pinon, 7 ins. diam., bears S. 61° W., 31 lks. dist., mkd. S11 BT.

A white cedar, 6 ins. diam., bears N. 62° 45' W., 26 lks. dist. mkd. S2 BT.

Raise a mound of stone, 3½ ft. base, 3 ft. high, W. of cor.

Land, broken.
Soil, gravelly and rocky.
Timber, juniper and pinon.

From the cor. of secs. 2 and 3, on the N. bdy. of the Tp.

S. 0° 01' E. bet. secs. 2 and 3.

Over broken land, through juniper and pinon; asc. 60 ft. over N. slope

- 3.70 Spur, slopes E.; desc. 120 ft. over S. slope.

- 12.70 Wash, 3 ft. deep, 15 lks. wide, drains E.; asc. 50 ft. over N. slope.

- 19.60 Low spur, slopes E.; desc. 30 ft. along E. slope.

Point for the ¼ sec. cor. of secs. 2 and 3

- 43.72 Set an iron post, 30 ins. long, 2½ ins. diam., 16 ins. in the ground to bedrock, and in a collar of stone, with brass cap mkd.

T36S R14W
¼
S 3 | S 2
1961

Survey of a Portion of the Subdivision of T. 36 S., R. 14 W.

Chains

from which

A juniper, 14 ins. diam., bears N. 50° 45' E., 27 lks. dist.,
mkd. $\frac{1}{4}$ S2 BT.

A juniper, 10 ins. diam., bears S. 44° W., 48 lks. dist.,
mkd. $\frac{1}{4}$ S3 BT.

Raise a mound of stone, 3 $\frac{1}{2}$ ft. base, 2 ft. high, W. of cor.

Desc. 10 ft. along E. slope.

46.20 Wash, 4 ft. deep, 50 lks. wide, drains N. 60° E.; asc. 120 ft. over
N. slope.

58.00 Spur, slopes NE.; desc. 30 ft. along E. slope.

71.00 Hollow; drains NE.; asc. 200 ft. over N. slope.

83.72 Point for the cor. of secs. 2, 3, 10 and 11, at a position calcu-
lated to be on a line bet. the cor. of secs. 1 and 12 on the E. bdy.
and the cor. of secs. 3, 4, 9 and 10.

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 15 ins. in the ground
to bedrock, and in a collar of stone, with brass cap mkd.

T36S R14W

| | |
|-----|-----|
| S 3 | S 2 |
| S10 | S11 |

1961

from which

A pinon, 12 ins. diam., bears N. 68° 45' E., 81 lks. dist.,
mkd. S2 BT.

A juniper, 18 ins. diam., bears N. 45° 30' W., 58 lks. dist.,
mkd. S3 BT.

Land, broken hills.
Soil, gravelly and rocky.
Timber, juniper and pinon.

From the cor. of secs. 1, 2, 11 and 12.

S. 89° 56' W. bet. secs. 2 and 11.

Over broken hills, through juniper and pinon; asc. 30 ft. over NE.
slope.

4.50 Low spur, slopes N.; desc. 60 ft. over NW. slope.

13.40 Wash, 3 ft. deep, 30 lks. wide, drains N. 80° W.

17.10 Wash, 5 ft. deep, 1 ch. wide, drains N. 45° W.; asc. 150 ft. over
E. slope.

30.00 Spur, slopes N.; desc. 110 ft. over W. slope.

39.90 Small wash, drains N. 45° W.

39.97 Point for the $\frac{1}{4}$ sec. cor. of secs. 2 and 11.

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground,
with brass cap mkd.

Chains

T36S R14W

¼ $\frac{S\ 2}{S11}$

1961

from which .

A juniper, 6 ins. diam., bears N. 20° 15' W., 24 lks. dist., mkd. ¼ S2 BT.

A juniper, 8 ins. diam., bears S. 4° 15' W., 71 lks. dist., mkd. ¼ S11 BT.

Raise a mound of stone, 3½ ft. base, 2 ft. high, N. of cor.

Asc. 10 ft. along gentle N. slope.

- 42.50 Low rise, slopes N.; desc. 40 ft. over NW. slope.
- 45.90 Wash, in bottom of hollow, drains N.; asc. 170 ft. over E. slope.
- 61.40 Spur, slopes N. 15° E.; desc. 40 ft. over NW. slope.
- 68.70 Small ravine, drains N. 30° E.; asc. 100 ft. over NE. slope.
- 73.50 Spur, slopes N. 30° E.; desc. 50 ft. over NW. slope.
- 79.80 Bottom of small ravine, drains N.; asc. along N. slope.
- 79.94 The cor. of secs. 2, 3, 10 and 11.

Land, broken.

Soil, gravelly and rocky.

Timber, juniper and pinon.

From the ¼ sec. cor. of secs. 16 and 17.

N. 0° 02' W. bet. secs. 16 and 17.

Over broken hilly land, through juniper and pinon; asc. gentle S. slope.

- 4.15 Telephone line, 6 strand, bears N. 46° E. and S. 46° W.
- 5.20 Graded gravel road, bears N. 46° E. and S. 46° W.; asc. 60 ft. over gentle S. slope.
- 22.76 Wash, 3 ft. deep, 20 lks. wide, drains S. 20° W.; also base of steeper ascent; asc. 100 ft. over SE. slope of spur.
- 35.00 Top of spur, slopes SW. from N.; asc. 20 ft. over top of spur.
- 43.57 Point for the cor. of secs. 16 and 17 at intersection with sectional correction line.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground with brass cap mkd.

| | |
|------|------|
| S17 | S16 |
| T36S | R14W |
| 1961 | |

Survey of a Portion of the Subdivision of T. 36 S., R. 14 W.

Chains

from which

A white cedar, 5 ins. diam., bears S. 9° 30' E., 16 lks. dist., mkd. S16 BT.

A pinon, 6 ins. diam., bears S. 47° W., 23 lks. dist., mkd. S17 BT.

Raise a mound of stone, 3½ ft. base, 2 ft. high, S. of cor.

Land, broken hills.

Soil, gravelly and rocky.

Timber, juniper and pinon.

From the cor. of secs. 9; 10, 15 and 16.

West, bet. secs. 9 and 16, along sec. correction line.

Over rolling to broken hilly land, through juniper and pinon; desc. 50 ft. over gentle NW. slope.

18.30 Wash, in bottom of Joel Spring Canyon, drains S. 70° W.; asc. 20 ft. along gentle S. slope.

25.00 Telephone line, 6 strand, bears N. 61° 35' E. and S. 61° 35' W.

26.64 Graded gravel road, bears N. 61° 35' E. and S. 61° 35' W.; continue along gentle S. slope.

33.60 Small wash, drains S.; asc. 20 ft. along gentle S. slope.

40.00 Point for the ¼ sec. cor. of sec. 9.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T36S R14W

¼ S 9
1961

Raise a mound of stone, 3½ ft. base, 2 ft. high, N. of cor.

40.35 Point for the ¼ sec. cor. of sec. 16.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

¼ S16
T36S R14W
1961

from which

A white cedar, 8 ins. diam., bears S. 84° E., 27 lks. dist., mkd. ¼ S16 BT.

A white cedar, 10 ins. diam., bears S. 43° 30' W., 47 lks. dist., mkd. T36S R14W ¼ S16 BT.

Raise a mound of stone, 4½ ft. base, 2½ ft. high, S. of cor.

Desc. 40 ft. along gentle S. slope.

Survey of a Portion of the Subdivision of T. 36 S., R. 14 W.

Chains

- 62.00 Small wash, drains S.; asc. 60 ft. over SE. slope.
- 70.00 Rise, slopes S.; desc. 50 ft. over W. slope.
- 76.65 Unimproved road, bears N. and S.; asc. 50 ft. over E. slope to top of spur.
- 80.35 The cor. of secs. 16 and 17.

Land, broken hills.
Soil, gravelly and rocky.
Timber, juniper and pinon.

+

General Description

The portion of Township 36 South, Range 14 West covered by this survey consists of broken, low hills covered with medium growth of juniper and pinon and small valleys covered with sagebrush.

The main roads within the township consist of a hard surface road, State Highway No. 56, which enters the township on the south boundary of section 34, bears northwest and leaves the township on the west boundary of section 18. A graded gravel road enters the township on the west boundary of section 12, bears irregularly west through Joel Spring Canyon and intersects State Highway No. 56 in section 19. There are numerous unimproved roads within the township used for wood hauling, post cutting and livestock care.

The soil is generally rocky and gravelly on the hills and clay loam in the valleys.

The elevation varies from about 7273 ft. to 5600 ft. above sea level.

CERTIFICATE OF SURVEY

I, **Woodrow H. Sylvester**, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the **18** day of **September**, 19**59**, I have supervised the dependent resurvey of a portion of the **Seventh Standard Parallel South in Range 14 West** and a portion of the west boundary, **Township 36 South, Range 13 West** and a portion of the subdivision and the survey of a portion of the subdivision of **Township 36 South, Range 14 West**, of the **Salt Lake** Meridian, in the State of **Utah**, which are represented in the foregoing field notes as having been executed ~~by me~~ under my ~~direction~~ ^{supervision}; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

August 23, 1963

(Date)

Woodrow H. Sylvester
(Cadastral Surveyor)

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT,
Washington, D. C.

The foregoing field notes of the dependent resurvey of a portion of the **Seventh Standard Parallel South in Range 14 West** and a portion of the west boundary, **Township 36 South, Range 13 West** and a portion of the subdivision and a survey of a portion of the subdivision of **Township 36 South, Range 14 West**, **Salt Lake Meridian, Utah**,

executed by **Leonard W. Murphy, Survey Technician**, under the supervision of **Woodrow H. Sylvester, Cadastral Surveyor** having been critically examined and found correct, are hereby approved.

OCT 4 1963

(Date)

Clark J. Lumm
Acting (Chief, Division of Engineering)

CERTIFICATE OF TRANSCRIPT

I CERTIFY That the foregoing transcript of the field notes of the above-described surveys in _____, is a true copy of the original field notes.

(Date)

(Chief, Division of Engineering)

R570

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

ORIGINAL

FIELD NOTES

OF THE

REMONUMENTATION

OF A PORTION OF THE ORIGINAL SURVEY CORNERS

IN

TOWNSHIP 10 NORTH, RANGE 4 EAST

Of the Salt Lake Meridian,

in the State of Utah

EXECUTED BY

Elliot Bird, Cadastral Surveyor

Under special instructions dated October 14, 1939, which provided

for the surveys included under Group No. 304, approved November 24, 1939

and assignment instructions dated September 7, 1949

Survey commenced September 12, 1949

Survey completed September 27, 1949

INDEX DIAGRAM

Township 10 North, *Range* 4 East

| | | | | | |
|----|----|----|----|----|------|
| 6 | 5 | 4 | 3 | 2 | 1 |
| 7 | 8 | 9 | 10 | 11 | 12 |
| 13 | 14 | 15 | 16 | 17 | 18 |
| 19 | 20 | 21 | 22 | 23 | 24 |
| | | | | 2 | 2 |
| 25 | 26 | 27 | 3 | 3 | 1 28 |
| | | | | | 1 |
| 29 | 30 | 31 | 32 | 33 | 34 |

Township 10 North, Range 4 East

Chains

The south boundary of T. 10 N., R. 4 E., Salt Lake Meridian, Utah, was originally surveyed by J. H. Martineau in 1877. In 1878 he surveyed the east boundary and south two miles of the west boundary. In 1881 he resurveyed the south and east boundaries and the south two miles of the west boundary, and surveyed the remaining exteriors and the subdivisions of T. 10 N., R. 4 E. Hanson and Giers resurveyed the north boundary in 1899. In 1891 N. P. Hanson resurveyed the west boundary. In 1938 Elliot Bird resurveyed the east boundary. The south boundary was resurveyed by R. Gentry and A. C. Alberga.

The following field notes are those of the remonumentation of certain identified original corners in T. 10 N., R. 4 E., Salt Lake Meridian. The position of each corner was marked by the original monument, or determined from corner accessories, recorded in the original survey record. This work was authorized under special instructions for Group 304, Utah, dated October 14, 1939. The corners herein described and remonumented were identified by Elliot Bird, Cadastral Engineer, in 1949.

Remonumentation of Corners in T. 10 N., R. 4 E.

At found original cor. of secs. 25, 26, 35 and 36, T. 10 N., R. 4 E., mkd. by a limestone, 20x16x8 ins., mkd. with 1 groove on the S. and E. sides, firmly set in a large mound of stone; no other accessories.

At the cor.

Set an iron post, 2 ins. diam., 36 ins. long, 20 ins. in the ground to rock and supported in a mound of stone, with brass cap mkd.

T10N R4E
 S26|S25
 S35|S36
 1949

Bury the original cor. stone at base of the iron post

Cor. is located approximately 3 chs. dist. W. and N. of Mollen Hollow.

From this sec. cor. the cor. of secs. 1, 2, 35 and 36 on the S. bdy. of the Tp. bears approximately S. 7° 24' E., 66.14 chs. dist.

At found original $\frac{1}{4}$ sec. cor. of secs. 25 and 26, mkd. by a limestone, 24x12x8 ins., mkd. $\frac{1}{4}$ on W. face, firmly set in a mound of stone; no other accessories.

Mark new bearing trees as follows

A Douglas fir, 8 ins. diam., bears S. 14° W., 170 lks. dist., mkd. $\frac{1}{4}$ S26 BT.

A jack pine, 12 ins. diam., bears N. 51° E., 151 lks. dist., mkd. $\frac{1}{4}$ S25 BT.

Cor. is located on a S. slope, about 75 lks. dist. N. of hollow.

From this $\frac{1}{4}$ sec. cor. the cor. of secs. 25, 26, 35 and 36 bears approximately S. 0° 05' W., 40.60 chs. dist.

Remonumentation of Corners in T. 10 N. R. 4 E.

Chains

At found original cor. of secs. 23, 24, 25 and 26 mkd. by a 5 ft. white pine stump, 16 ins. diam., mkd. with 2 notches on S. face and 1 notch on E. face,

from which original bearing trees

A balsam (dead) 12 ins. diam., bears N. 80° W., 5 lks. dist. (record dist.), mkd. with old blaze and dim scribe marks.

A balsam stump, 12 ins. diam., bears N. 46° E., 6 lks. dist. (record dist.).

There is no remaining evidence of the two recorded aspen bearing trees.

Mark new bearing trees

A white pine, 16 ins. diam., bears N. 67° E., 20 lks. dist., mkd. T10N R4E S24 BT.

A white pine, 18 ins. diam., bears S. 56° 30' E., 46 lks. dist., mkd. T10N R4E S25 BT.

A white pine, 12 ins. diam., bears S. 44° W., 21 lks. dist., mkd. T10N R4E S26 BT.

A balsam, 10 ins. diam., bears N. 36° 30' W., 39 lks. dist., mkd. T10N R4E S23 BT.

From this sec. cor. the $\frac{1}{4}$ sec. cor. of secs. 25 and 26, bears approximately S. 0° 07' W., 40.50 chs. dist.

At found original $\frac{1}{4}$ sec. cor. of secs. 23 and 26, mkd. by a red sandstone, 20x14x6 ins., mkd. $\frac{1}{4}$ on N. face, firmly set in the ground, from which the original bearing tree

An aspen, 14 ins. diam., bears N. 4° 30' E., 58 lks. dist., mkd. $\frac{1}{4}$ S BT (record N. 50 lks.).

There is no remaining evidence of other bearing tree.

At the cor.

Set an iron post, 1 in. diam., 36 ins. long, 27 ins. in the ground, with brass cap mkd.

$\frac{1}{4}$ S23
S26

1949

Bury the original cor. stone at base of post,

from which new bearing trees

A spruce, 18 ins. diam., bears N. 7° 30' E., 128 lks. dist., mkd. $\frac{1}{4}$ S23 BT.

A balsam, 10 ins. diam., bears S. 59° 15' W., 35 lks. dist., mkd. $\frac{1}{4}$ S26 BT.

A small pond bears N. 45° E. about 6 $\frac{1}{2}$ chs. dist.

From this $\frac{1}{4}$ sec. cor. the cor. of secs. 23, 24, 25 and 26 bears approximately N. 89° 43' E., 39.64 chs. dist.

Remonumentation of Corners in T. 10 N., R. 4 E.

Chains

At found original $\frac{1}{4}$ sec. cor. of secs. 26 and 27, mkd. by a quartzite stone, 8x6x5 ins., mkd. $\frac{1}{4}$ on W. face, firmly set in a mound of stone. No other accessories.

At the cor.

Set an iron post, 1 in. diam., 36 ins. long, 27 ins. in the ground, with brass cap mkd.

$\frac{1}{4}$
S27|S26
1949

from which

A balsam, 12 ins. diam., bears N. 75° 15' E., 179 lks. dist., mkd. $\frac{1}{4}$ S26 BT.

A balsam, 12 ins. diam., bears S. 75° 15' W., 338 lks. dist., mkd. $\frac{1}{4}$ S27 BT.

Bury the original cor. stone at base of post.

From this $\frac{1}{4}$ sec. cor. the $\frac{1}{4}$ sec. cor. of secs. 25 and 26 bears approximately S. 89° 09' E., 80.25 chs. dist.

At found original $\frac{1}{4}$ sec. cor. of secs. 27 and 28, mkd. by a quartzite stone, 16x12x10 ins., firmly set and mkd. $\frac{1}{4}$ on W. face. No accessories. Cor. not remonumented. Mark new bearing trees.

A balsam, 8 ins. diam., bears N. 29° E., 93 lks. dist., mkd. $\frac{1}{4}$ S27 BT.

A balsam, 8 ins. diam., bears N. 41° 30' W., 95 lks. dist., mkd. $\frac{1}{4}$ S28 BT.

From this $\frac{1}{4}$ sec. cor. the $\frac{1}{4}$ sec. cor. of secs. 26 and 27 bears approximately N. 89° 09' E., 78.17 chs. dist.

Chains

initials

1. [Illegible text]

[Illegible text]

2. [Illegible text]

[Illegible text]

3. [Illegible text]

4. [Illegible text]

5. [Illegible text]

6. [Illegible text]

7. [Illegible text]

8. [Illegible text]

9. [Illegible text]

10. [Illegible text]

11. [Illegible text]

12. [Illegible text]

13. [Illegible text]

14. [Illegible text]

15. [Illegible text]

16. [Illegible text]

17. [Illegible text]

18. [Illegible text]

19. [Illegible text]

20. [Illegible text]


102

CERTIFICATE OF CADASTRAL ENGINEER

I, Elliot Bird, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 14th day of October, 1949, I have ~~revised~~ **remonumented a portion of the original survey corners in T. 10 N., R. 4 E.**

of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in the specific manner described in the foregoing field notes.

Salt Lake City, Utah
April 24, 1961


Elliot Bird, Cadastral Surveyor


CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT,
Washington, D. C., AUG 1 1962, 19

The foregoing field notes of the ~~survey of~~ **remonumentation of a portion of the original survey corners in T. 10 N., R. 4 E., Salt Lake Meridian,**

executed by Elliot Bird, Cadastral Surveyor

having been critically examined and found correct, are hereby approved.

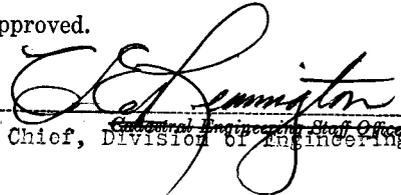
Chief, ~~Division of Engineering~~ Cadastral Engineering Staff Officer

CERTIFICATE OF TRANSCRIPT

~~I CERTIFY that the foregoing transcript of the field notes of the above described surveys in _____, is a true copy of the original field notes.~~

~~Cadastral Engineering Staff Officer.~~

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
ORIGINAL

FIELD NOTES

OF

REMONUMENTATION OF CORNERS ALONG

EAST BOUNDARY OF UINTAH INDIAN RESERVATION (36 1/2 M to 38 1/2 M)

ALONG NORTH BOUNDARY OF

TOWNSHIP 2 NORTH, RANGE 1 EAST, UINTAH SPECIAL MERIDIAN

AND IN

TOWNSHIP 2 NORTH, RANGE 1 EAST, UINTAH SPECIAL MERIDIAN

TOWNSHIP 2 NORTH, RANGE 1 WEST, UINTAH SPECIAL MERIDIAN

TOWNSHIP 2 NORTH, RANGE 2 WEST, UINTAH SPECIAL MERIDIAN

TOWNSHIP 2 NORTH, RANGE 4 WEST, UINTAH SPECIAL MERIDIAN

TOWNSHIP 2 NORTH, RANGE 5 WEST, UINTAH SPECIAL MERIDIAN

TOWNSHIP 2 NORTH, RANGE 9 WEST, UINTAH SPECIAL MERIDIAN

Of the UINTAH SPECIAL Meridian,

the State of UTAH

EXECUTED BY

Andrew Nelson - Cadastral Surveyor

Under special instructions dated February 15, 1961, which provided

for the surveys included under Group No. 447, approved February 16, 1961

and assignment instructions dated April 27, 1961

Survey commenced May 21, 1961

Survey completed June 8, 1961


INDEX DIAGRAM

Township , *Range*

| | | | | | |
|----|----|----|----|----|----|
| 6 | 5 | 4 | 3 | 2 | 1 |
| 7 | 8 | 9 | 10 | 11 | 12 |
| 18 | 17 | 16 | 15 | 14 | 13 |
| 19 | 20 | 21 | 22 | 23 | 24 |
| 30 | 29 | 28 | 27 | 26 | 25 |
| 31 | 32 | 33 | 34 | 35 | 36 |


CORNER REMONUMENTATION INDEX DIAGRAM

Township 2 North, Range 1 East, Wintah Special Meridian

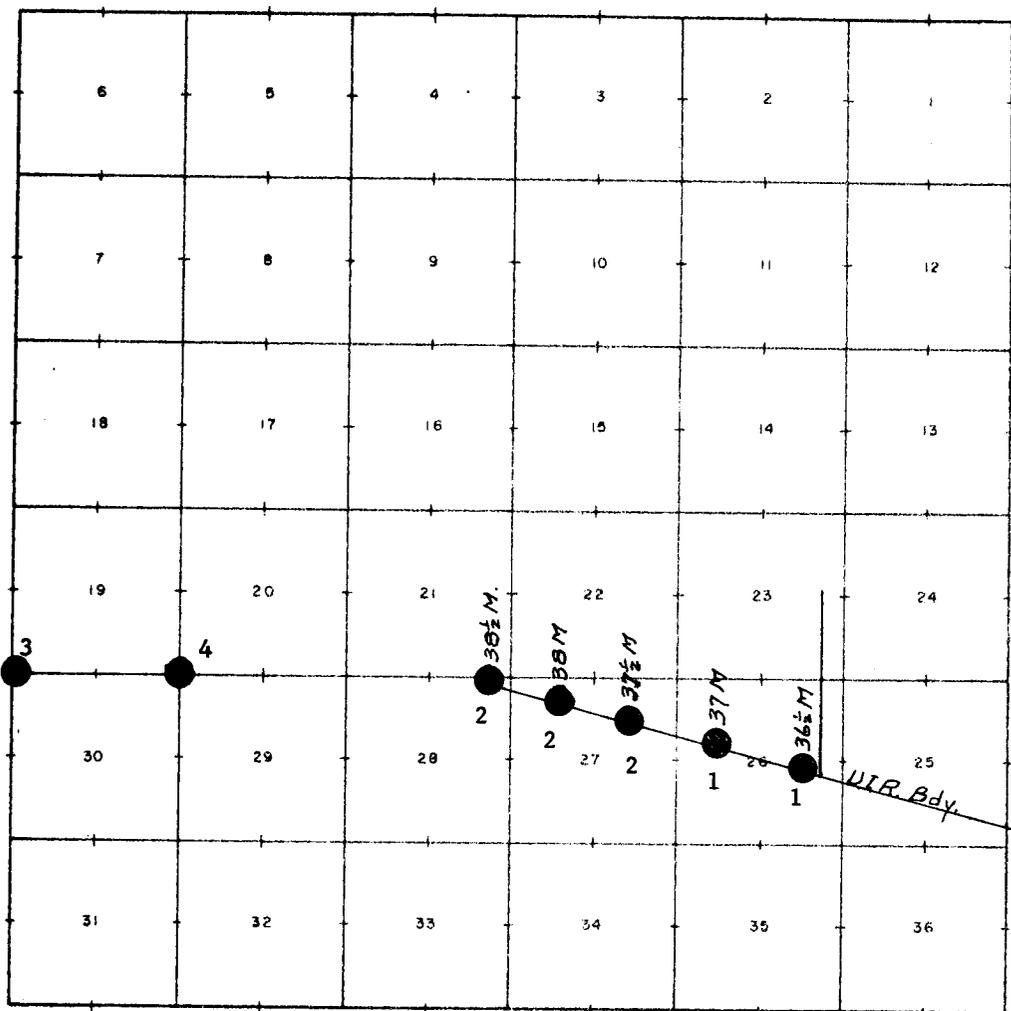

CORNER REMONUMENTATION INDEX DIAGRAM


Township 2 North, Range 1 West, Utah Special Meridian

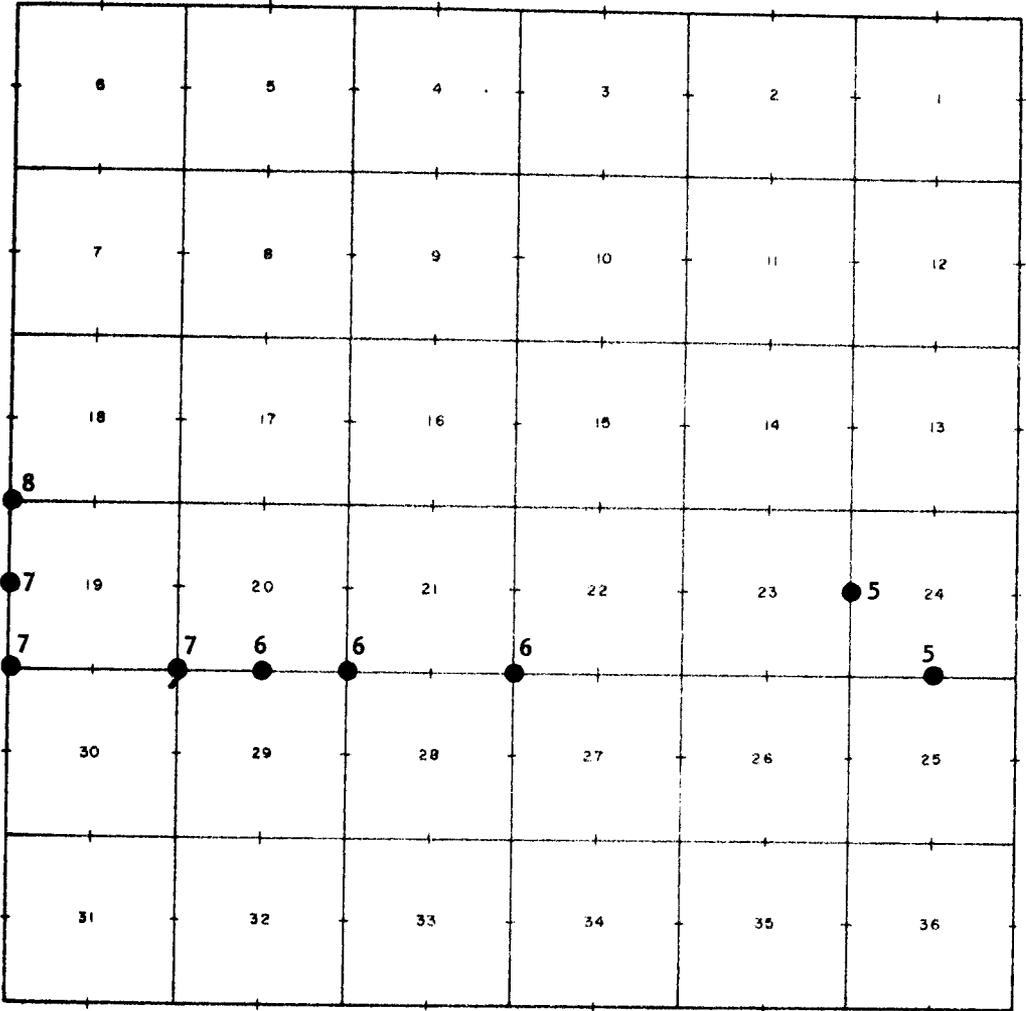

100


**CORNER REMONUMENTATION
INDEX DIAGRAM**

Township 2 North, Range 2 West, Uintah Special Meridian

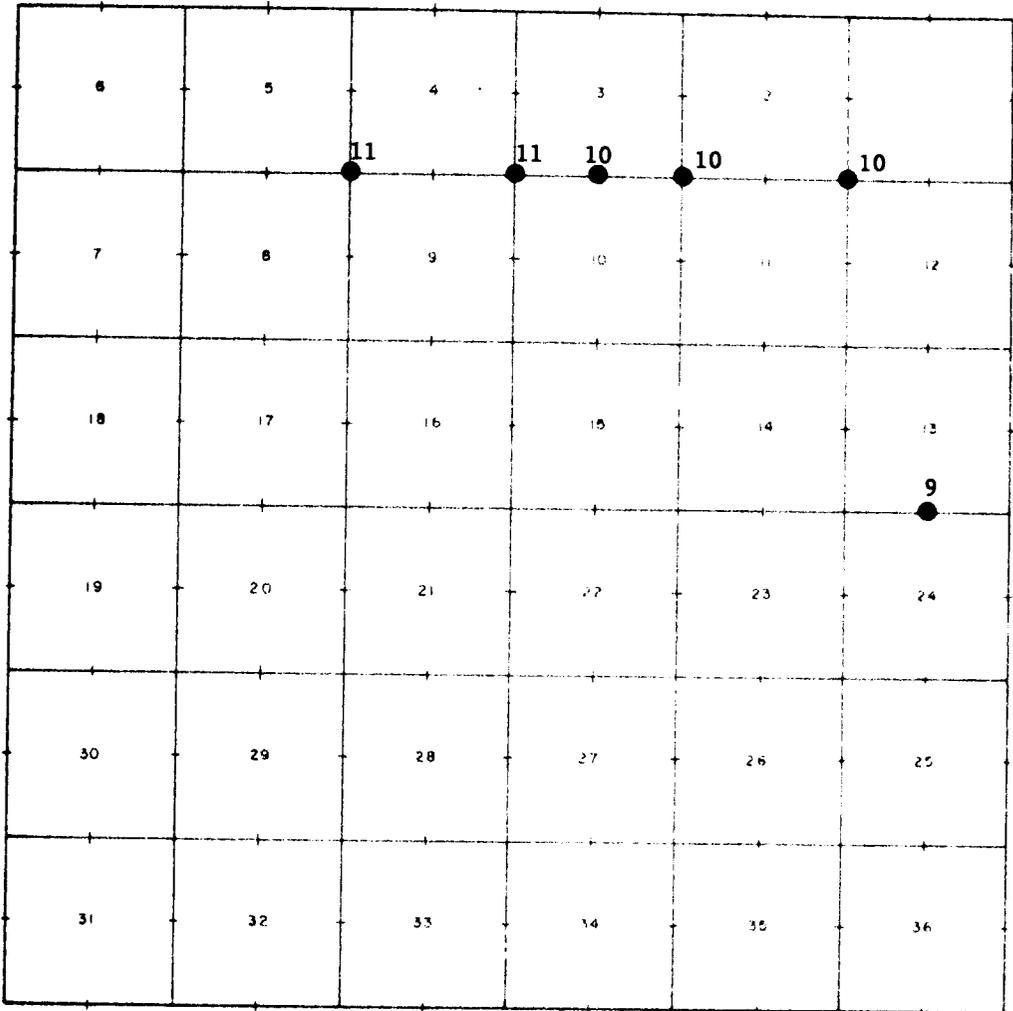


CORNER REMONUMENTATION INDEX DIAGRAM

Township 2 North, Range 4 West, Uintah Special Meridian

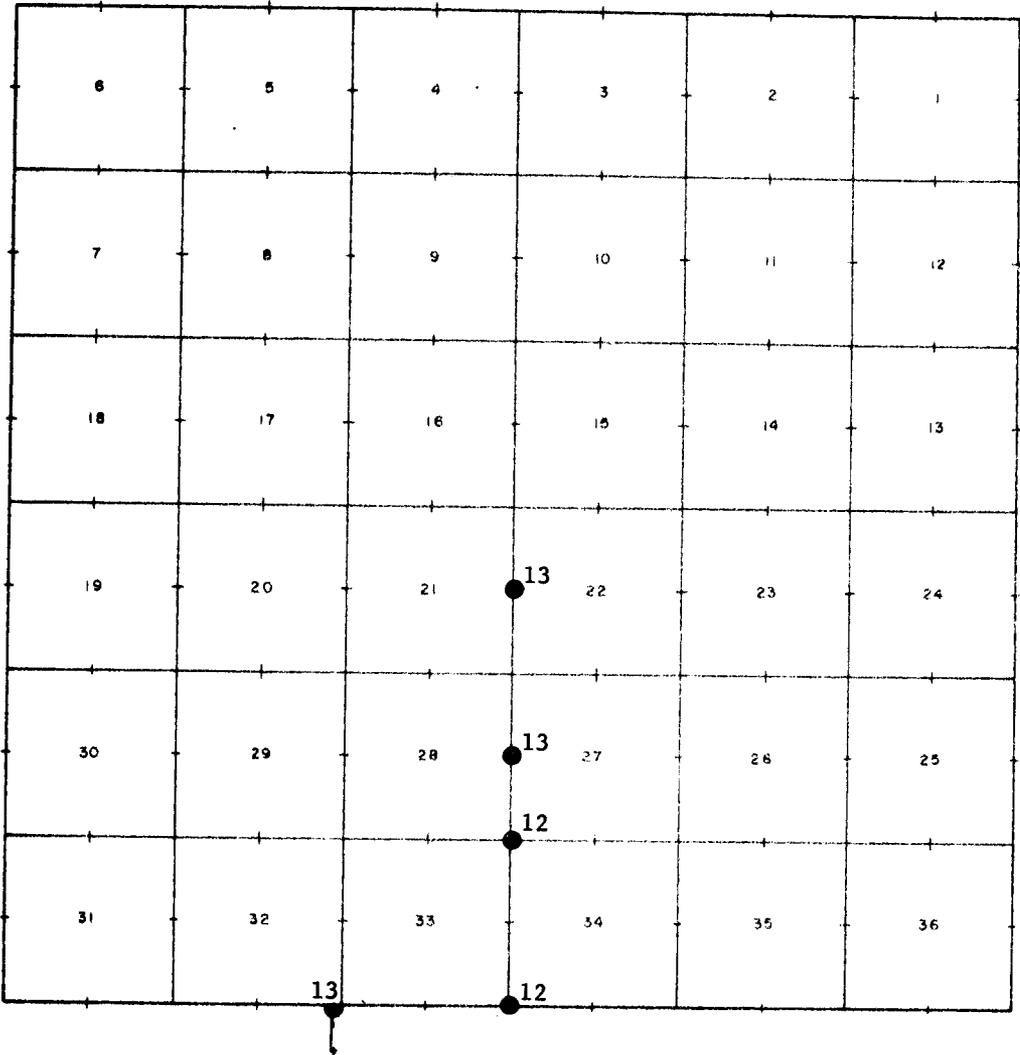

CORNER REMONUMENTATION INDEX DIAGRAM

Township 2 North, Range 5 West, Uintah Special Meridian

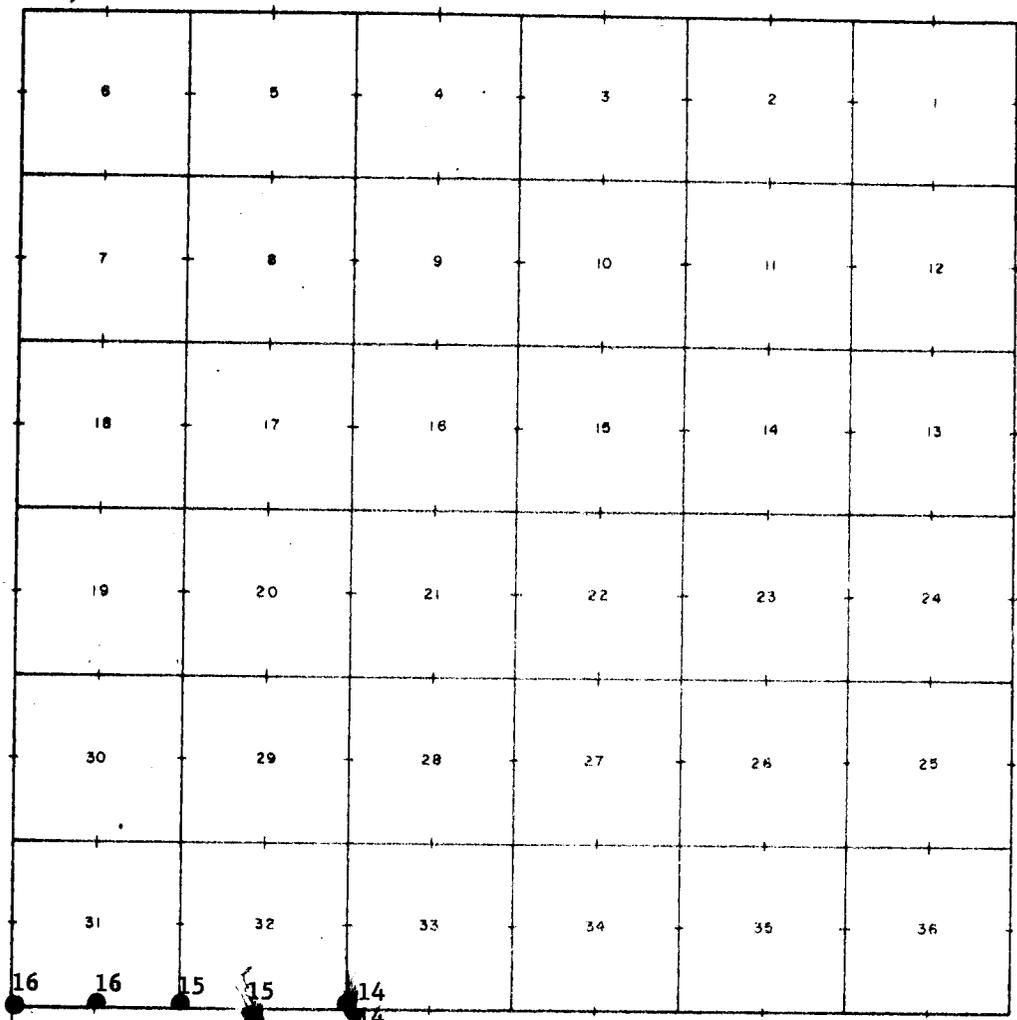


16 16 15 15 14 14

17 TLN R5W

CORNER REMONUMENTATION
INDEX DIAGRAM

Township 2 North, Range 9 West, Uintah Special Meridian

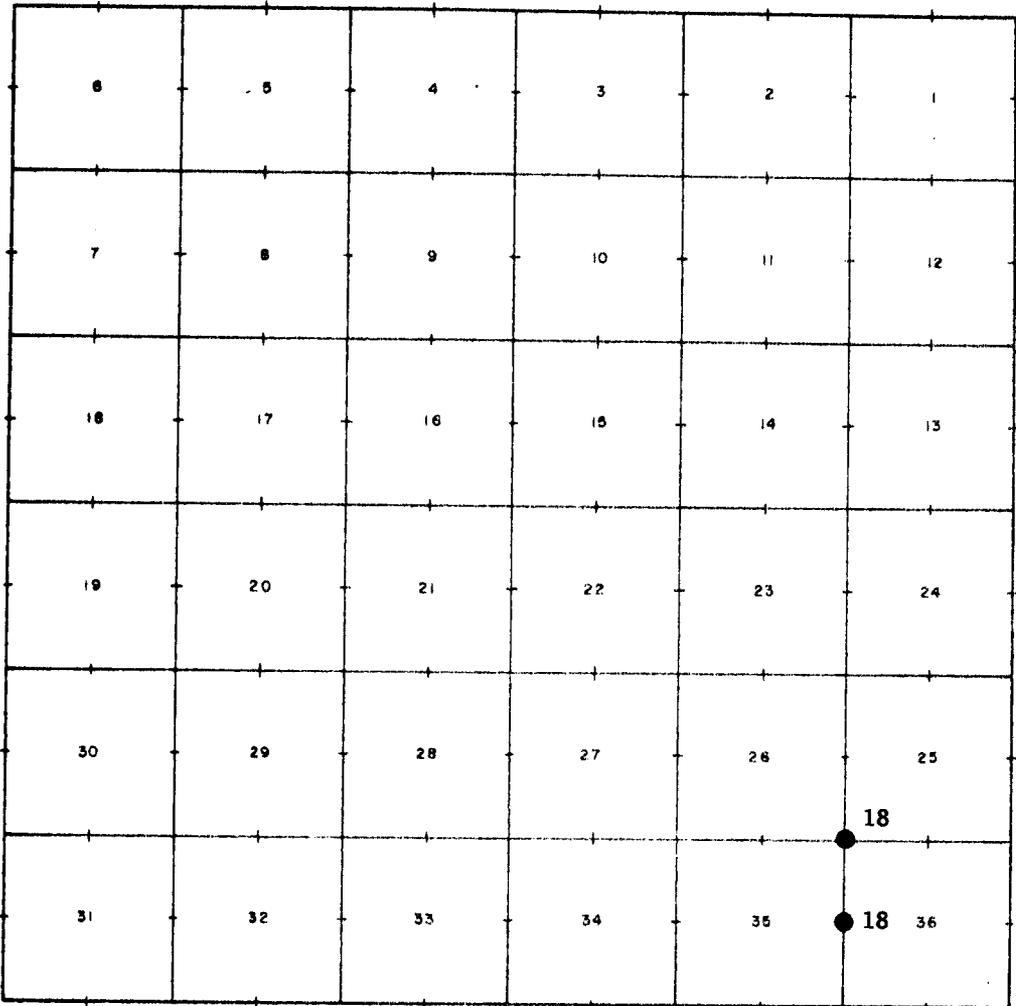

Re monumentation of Portion of East Boundary Uintah Indian Reservation

Chains

The following field notes are those of the remonumentation of 2 miles (36 1/2 M to 38 1/2 M) of the East boundary of the Uintah Indian Reservation, which is also along a portion of the south boundary of the Ashley National Forest. The reservation boundary was surveyed by A. H. and F. M. Brown in 1903.


The position of each identified original corner was marked by the original monument. The corners remonumented were selected by the Forest Service as being adjacent to, or controlling the boundaries of Forest Service Lands. The remonumentation was requested by and accomplished in cooperation with the Forest Service.

East Boundary Uintah Indian Reservation

At the 36 1/2 mile cor. which is mkd. by a granite stone, 18x12x10 ins., loosely set at base of fence cor. post, mkd. with UIR on S. face, and 1/2 M on E. face; unwitnessed.

At cor. point


Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with original cor. stone buried on S. side of post; brass cap mkd.



No accessories available.

Corner is located in wire fence bearing N. 76° W. and S. 76° E. on Reservation bdy. and fence bearing N.

From this cor., S. 76° E., 1.37 chs. dist. I found an iron pipe, 2 1/2 ins. diam., showing 1 ft. above ground, with iron screw cap mkd.



This pipe was set by the Indian Service.

At the 37 mile cor. which is also angle cor., which is mkd. by a granite stone, 24x12x10 ins., firmly set, mkd. 37 M on E. and UIR on S. face, also another stone lying on ground alongside, 15x9x6 ins., mkd. 37 M on one face, and UIR 1B on opposite side; witnessed by a collar of rock and 1 bearing tree.

A cedar, 10 ins. diam., bears N. 46° W., 56 lks. dist., mkd. UIN 1B 37M BT.

At cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 12 ins. in the ground to rock, with original cor. set along N. side of post; brass cap mkd.



Chains

Raise a mound of stone, 3 ft. base, around post.

Cor. is located in wire fence, bearing N. 72° W. and S. 76° E. along reservation bdy.

At the 37½ mile cor. which is mkd. by a granite stone, 26x14x10 ins., firmly set, mkd. UIR on S. and ½ M on E. face; witnessed by a mound of stone, 2x1½ ft., SE. 8 ft. dist.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground to rock, with original cor. set along E. side of post; brass cap mkd.

37½ M
UIR
1961

Raise a mound of stone, around post.

Cor. is located in wire fence, bearing N. 72° W. and S. 72° E. along reservation bdy.

At the 38th mile cor. which is mkd. by a sandstone, 17x12x6 ins., firmly set, mkd. 38 M on E., and UIR on S. face, and UIR 1B on NW. side; witnessed by a small mound of stone, W. of stone.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with original cor. buried on the W. side of post; brass cap mkd.

38 M
UIR
1961

Cor. is located in wire fence bearing N. 72° W. and S. 72° E. along reservation boundary.

At the 38½ mile cor. which is mkd. by a sandstone, 17x14x9 ins., loosely set in collar of rock, mkd. ½ M on E. and UIR on S. face; witnessed by few scattered rock.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground to rock, with original cor. set on NE. side of post; brass cap mkd.

38½ M
UIR
1961

Raise a mound of stone to top, around post.

Cor. is located in wire fence, bearing S. 72° E. and W. along F.S. bdy. No evidence found of the CC secs. 21 and 28, T. 2 N., R. 1 E., U.S. Mer.

Re monumentation of Cors. in T. 2 N., R. 1 E., U.S. Mer.

Chains

The following field notes are those of the remonumentation of certain identified original corners in T. 2 N., R. 1 E., Uintah Special Mer., Utah. The W. bdy. of which is the Uintah Special Meridian, was surveyed by J. H. Martineau, in 1903. He also surveyed the N. bdy. and the subdivisions at that time. The S. bdy. was surveyed by C. L. Du Bois, in 1875.

The position of each corner was marked by the original monument or determined from corner accessories as recorded in the survey record. The corners remonumented were selected by the Forest Service as being adjacent to, or controlling the boundaries of Forest Service Lands. The remonumentation was requested by and accomplished in cooperation with the Forest Service.

At the cor. of secs. 19, 24, 25 and 30, on the W. bdy. of T. 2 N., R. 1 E., U.S. Mer., which is mkd. by a granite stone, 18x15x12 ins., loosely set in small circle of rock, mkd. with 2 grooves on S. and 4 grooves on N. face; witnessed by original bearing trees as follows:

A pinon stump, 5 ft. high, 12 ins. diam., bears N. 38° E., 40 lks. dist., (record dist. 43 lks.) marks too weathered to read.

A pinon, 12 ins. diam., bears S. 1° E., 49 lks. dist., mkd. SCT2NR1ES30BT. (Record bearing and dist. is S. 40½° E., 51 lks.)

A pinon, 12 ins. diam., bears S. 66° W., 38 lks. dist., mkd. T2NR1WS25BT. (Record bearing S. 64° W.)

A cedar, 12 ins. diam., bears N. 21° W., 11 lks. dist., mkd. SC T2NR1WS24BT. (Record bearing N. 17° 20' W.)

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground with original cor. buried on N. side of post; brass cap mkd.

| | |
|------|-----|
| T2N | |
| R1W | R1E |
| S24 | S19 |
| S25 | S30 |
| 1961 | |

Cor. is located on stony SW. slope, 3 lks. S. of E-W wire fence.

The cor. of secs. 19, 20, 29 and 30, is reestablished in its original position from the original SW. bearing tree, and stump in NE. quadrant. There is no evidence of the original stone, nor of the "1957" iron post, which was destroyed in the construction of metal cattle guard across newly built road.

A cedar, 14 ins. diam., bears S. 27° 40' W., 165 lks. dist., mkd. T2NR1ES3 (other marks obliterated).

A cedar stump, 16 ins. diam., bears N. 55° E., 193 lks. dist. showing lower end of old blaze (record bearing and dist. is N. 41½° E., 193 lks.)

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground to rock, over broken glass, with lower portion of post surrounded by concrete, and in mound of stone to top; brass cap mkd.

ation of Cors

Chains

T2N | R1E
S19 | S20
S30 | S29
1961

from which I set

A brass tablet, 3¼ ins. diam., 3½ ins. stem, seated in the SW. concrete abutment of cattle guard, for a reference monument, bears S. 75° E., 20½ lks. (13.5 ft.) marked

REFR

←
13.5 ft.
1961

Cor. is located in E-W Forest Service wire fence, 39 lks. W. of center line of cattle guard and N-S road, and 10½ lks. E. of cedar fence post at cor. of fences bearing E., W. and N.

Remonumentation of Corners in T. 2 N., R. 1 W., U.S. Mer.

Chains

T. 2 N., R. 1 W., Uintah Special Meridian, Utah, was surveyed by J. H. Martineau, D.S., in 1903. He surveyed the E., W. and N. bdrs. and subdivisions. The S. bdy. was surveyed in 1875 by C. L. Du Bois.

The following field notes are those of the remonumentation of certain identified original corners in T. 2 N., R. 1 W. The position of each corner was marked by the original monument, or determined from corner accessories recorded in the original surveyed record.

The corners remonumented were selected by the Forest Service as being adjacent to, or controlling the boundaries of Forest Service Lands. The remonumentation was requested by and accomplished in cooperation with the Forest Service.

T. 2 N., R. 1 W.

At the 1/4 sec. cor. of secs. 24 and 25, which is mkd. by a granite stone, 18x12x10 ins., firmly set, mkd. 1/4 on N. face; witnessed as follows:

A cedar, 24 ins. diam., bears N. 31° W., 14 lks. dist., mkd. 1/4 S BT.

A cedar stump, 10 ins. diam., bears S. 65° W., 33 lks. dist. no marks remaining.

At cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground with original cor. buried on N. side of post; brass cap mkd.

T2N R1W
1/4 S24
S25
1961

Raise a mound of stone, 4x2 ft., N. of cor.

Cor. is located on rocky W. slope, 45 lks. N. of E-W wire fence.

At the 1/4 sec. cor. of secs. 23 and 24, which is mkd. by a granite stone, 12x9x6 ins., firmly set, mkd. 1/4 on W. face; witnessed by a mound of stone, 2x2 ft. W. of cor.

At cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with original cor. buried on N. side of post; brass cap mkd.

T2NR1W
1/4 S23 | S24
1961

Cor. is located on a gradual N. slope, in N+S wire fence.

At the cor. of secs. 21, 22, 27 and 28, which is mkd. by a granite stone, 13x8x9 ins., firmly set, mkd. with 2 grooves on S. and 3 grooves on E. face; witnessed by a small mound of stone, W. of cor.

At cor. point

Chains

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground with original cor. buried on E. side of post; brass cap mkd.

| | |
|------|-----|
| T2N | R1W |
| S21 | S22 |
| S28 | S27 |
| 1961 | |

Raise a small mound of stone around post.

Cor. is located in bottom of wide hollow, 6 lks. N. of E-W wire fence, and about 5 chs. W. of gate and dim road bearing nearly N-S.

At the cor. of secs. 20, 21, 28 and 29, which is mkd. by a granite boulder, 24x24x18 ins., firmly set, mkd. 2 grooves on S. and 4 grooves on E. side; no accessories.

At N. edge of boulder

Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to rock, and supported in a large mound of stone to top; brass cap mkd.

| | |
|------|-----|
| T2N | R1W |
| S20 | S21 |
| S29 | S28 |
| 1961 | |

Cor. is located on a SE. slope, about 2 chs. E. of summit of high hill, and 2 lks. S. of E-W Forest Service wire fence. Highest point on hill bears NW. about 4 chs. dist.

At the ¼ sec. cor. of secs. 20 and 29, which is mkd. by a granite stone, 16x10x7 ins., mkd. ¼ on one face, lying on ground at S. base of mound of stone, 3x1 ft.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with original cor. buried on S. side of post; brass cap mkd.

| |
|---------|
| T2NR1W |
| ¼ — S20 |
| S29 |
| 1961 |

Rebuild mound of stone, N. of cor. and place collar of rock around post.

Corner is located in E-W wire fence, on gentle E. slope. A small spring bears about S. 80° E. about 10 chs. dist.

Re monumentation of Cor. in T. 2 N., R. 1 W.

Chains

At the cor. of secs. 19, 20, 29 and 30, which is mkd. by a granite stone, 21x14x9 ins., firmly set, mkd. with 2 grooves on S. and 5 grooves on E. side; witnessed by a small scattered mound of stone, N. of cor.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with original cor. buried on SW. side of post; brass cap mkd.

| | | |
|------|--|-----|
| T2N | | R1W |
| S19 | | S20 |
| S30 | | S29 |
| 1961 | | |

Raise a mound of stone, 3x2 ft. N. of cor.

Cor. is located on steep, rocky W. slope, 2 lks. S. of E-W wire fence.

At the cor. of secs. 19, 24, 25 and 30, on the W. bdy. of Tp., which is mkd. by a granite stone, 18x11x8 ins., firmly set, mkd. 2 grooves on S. and 4 grooves on N. face; witnessed by few scattered rock.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with original cor. buried on E. side of post; brass cap mkd.

| | | |
|------|--|-----|
| T2N | | |
| R2W | | R1W |
| S24 | | S19 |
| S25 | | S30 |
| 1961 | | |

Raise a small mound of stone around post.

Cor. is located 4 lks. E. of cedar fence post at cor. of wire fences bearing N. and E., and on gentle E. slope, about ¼ ch. E. of low spur, slopes S.

At the ¼ sec. cor. of secs. 19 and 24, on W. bdy. of Tp., which is mkd. by a granite stone, 17x7x6 ins., loosely set in small mound of stone, mkd. ¼ on W. face; no other accessories.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with original cor. buried on SW. side of post; brass cap mkd.

| | | |
|------|---|-----|
| T2N | | |
| R2W | ¼ | R1W |
| S24 | | S19 |
| 1961 | | |

Place collar of stone around post, and raise a mound of stone, 2x1½ ft., W. of cor.

Cor. is located under N-S wire Forest Service fence, on gentle W. slope, about 3½ chs. dist. S. of ravine, course SW.

Chains

At the cor. of secs. 13, 18, 19 and 24, on W. hdy. of Tp., which is mkd. by a granite stone, 18x12x5 ins., firmly set; mkd. with 3 grooves on N. and S. faces; witnessed by a scattered mound of stone, W. of cor.; also at point 2½ lks. NE. of cor. stone find a gal. pipe, 2½ ins. diam., with screw cap, showing 1 ft. above ground,

1960
T2N T2N
R2W R1W
S13 S18
S24 S19
USEM

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with original cor. buried on S. side of post; brass cap mkd.

T2N
R2W R1W
S13 S18
S24 S19
1961

Rebuild mound of stone.

Cor. is located on steep, rocky SW. slope, at cor. of wire fences bearing S, W. and NW.

Remonumentation of Cors. in T. 2 N., R. 2 W., U.S. Mer.

Chains

T. 2 N., R. 2 W., Uintah Special Mer., Utah, was surveyed by William Dallas, D.S., in 1904. He surveyed the N. bdy. and subdivisions. The E. bdy. was surveyed by J.H. Martineau, in 1903. The S. bdy. was surveyed by H.D. Heist, in 1903. The W. bdy. was surveyed by H. E. Freudenthal, in 1903.

The following field notes are those of the remonumentation of certain identified original corners in T. 2 N., R. 2 W., U.S. Mer. The position of each corner was mkd. by the original monument, or determined from corner accessories recorded in original survey record.

The corners remonumented were selected by the Forest Service as being adjacent to, or controlling the boundaries of Forest Service Lands. The monumentation was requested by and accomplished in cooperation with the Forest Service.

T. 2 N., R. 2 W., U.S. Mer.

At the $\frac{1}{4}$ sec. cor. of secs. 13 and 24, which is mkd. by a granite stone, 17x15x8 ins., firmly set, mkd. $\frac{1}{4}$ on N. face; witnessed by a mound of stone, N. of cor.

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 22 ins. in the ground, with original cor. buried on the SE. side of post; brass cap mkd.

T2NR2W
 $\frac{1}{4}$ $\frac{S13}{S24}$
1961

Place collar of rock around post.

Cor. is located on steep, rocky E. slope, under wire fence, bearing E. and W., and about $1\frac{1}{2}$ chs. W. of small ravine, drains S.

Note: An Indian Service Monument, a galvanized pipe, 2 ft. long, $2\frac{1}{2}$ ins. diam., with metal screw cap, is set along N. side of of the original cor.; cap mkd.

1960
S 13
 $\frac{1}{4}$
S 24
T2NR2W

At the cor. of secs. 1, 2, 11 and 12, which is mkd. by a granite stone, 18x12x7 ins., loosely set, mkd. with 5 grooves on S. face, unable to find other marks; witnessed as follows:

A yellow pine, 12 ins. diam., bears N. 50° E., 151 lks. dist., blazed, marks overgrown.
A lodgepole pine, 12 ins. diam., bears S. 39° W., 23 lks. dist., mkd. T2N R2W S11 BT.
A yellow pine, 16 ins. diam., bears N. $23\frac{1}{4}^\circ$ W., 292 lks. dist., marks nearly overgrown.
No remaining evidence of the SE. bearing tree.

At cor. point

Chains

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground with original cor. buried on S. side of post; brass cap mkd.

| | |
|------|-----|
| T2N | R2W |
| S 2 | S 1 |
| S11 | S12 |
| 1961 | |

Raise a mound of stone, 3x2 ft. W. of cor.

Cor. is located on steep, rocky S. slope, in very scattered timber.

At the cor. of secs. 2, 3, 10 and 11, which is mkd. by a granite stone, 14x13x5 ins., lying on the ground at S. base of deeply embedded mound of stone, mkd. 5 grooves on one side and 2 grooves on cornering side; there is no remaining evidence of the original bearing trees (destroyed by beavers).

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground with original cor. buried on S. side of post; brass cap mkd.

| | |
|------|-----|
| T2N | R2W |
| S 3 | S 2 |
| S10 | S11 |
| 1961 | |

Raise a mound of stone around post.

Cor. is located 2 lks. S. of E-W wire fence, at the W. edge of gate and unimproved road bearing N. and S., and about 1 ch. W. of edge of beaver pond. Pole Creek bears E. of cor. about 5 chs. dist.

At the $\frac{1}{4}$ sec. cor. of secs. 3 and 10, which is mkd. by a granite stone, 18x15x4 ins., loosely set in the ground, mkd. $\frac{1}{4}$ on N. face; witnessed by a mound of stone, 2x2 ft., 3 ft. N. of cor.

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, over broken glass, original cor. stone buried on S. side of post; brass cap mkd.

| |
|--------------------------|
| T2NR2W |
| $\frac{1}{4}$ <u>S 3</u> |
| S10 |
| 1961 |

Cor. is located 10 lks. S. of E-W wire fence, and W. 25 lks. dist. of top high ridge, bears N. 30° W. and S. 30° E.

At the cor. of secs. 3, 4, 9 and 10, which is mkd. by a granite stone, 22x10x9 ins., firmly set, mkd. 3 grooves on E. and 5 grooves on S. face; witnessed by a mound of stone, 2x1 $\frac{1}{2}$ ft. W. of cor.

At cor. point

Remonumentation of Corners in T. 2 N., R. 2 W., U.S. Mer.

Chains

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground, with original cor. buried on S. side of post, and supported in a mound of stone to top; brass cap mkd.

| | |
|------|------|
| T2N | R2W |
| S 4 | S 3 |
| S 9 | S 10 |
| 1961 | |

Corner is located $4\frac{1}{2}$ lks. S. of E-W wire fence, on steep, rocky W. slope.

At the cor. of secs. 4, 5, 8 and 9, which is mkd. by a granite stone, 15x11x4 ins., firmly set, mkd. 5 grooves on S. and 4 grooves on E. face; witnessed by 1 original bearing tree and 1 stump.

A yellow pine, 26 ins. diam., bears N. 47° W., 101 lks. dist., mkd. T2N R2W S B (other marks too weathered to read).

A sawed pine stump, 2 ft. high, 26 ins. diam., bears N. $54\frac{1}{2}^{\circ}$ E., 154 lks. dist. No marks remaining.

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 14 ins. in the ground to rock, original cor. set along S. side of post, and supported in a mound of stone to top; brass cap mkd.

| | |
|------|-----|
| T2N | R2W |
| S 5 | S 4 |
| S 8 | S 9 |
| 1961 | |

from which I mark

A yellow pine, 10 ins. diam., bears N. 46° E., 49 lks. dist., mkd. T2N R2W S4 BT.

Cor. is located on gentle S. slope in medium dense pine and aspen timber, and about 4 chs. S. of low spur.

Chains

The survey of the east, west, and north boundaries, the subdivisions, and the resurvey of south boundary of T. 2 N., R. 4 W., Uintah Special Meridian, Utah, were executed by J. C. Dick and A. K. Tiernan, D.S., in 1903. The original survey of south boundary was executed by D. G. Major, in 1882.

The following field notes are those of the remonumentation of certain identified original corners in T. 2 N., R. 4 W., U. S. Meridian. The position of each corner was marked by the original monument or determined from corner accessories recorded in the original survey record.

The corners remonumented were selected by the Forest Service as being adjacent to, or controlling the boundaries of Forest Service Lands. The monumentation was requested by and accomplished in cooperation with the Forest Service.

T. 2 N., R. 4 W., U. S. Mer.

At the cor. of secs. 3, 4, 33 and 34 on the S. bdy. of Tp., which is mkd. by a granite stone, 13x9x8 ins., loosely set at E. base of embedded mound of stone, plainly mkd. with 3 notches on E. and W. edges.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, original cor. buried on E. side of post; brass cap mkd.

| | |
|------|-----|
| T2N | R4W |
| S33 | S34 |
| S 4 | S 3 |
| T1N | |
| 1961 | |

Place collar of rock around post, and rebuild mound of stone on the W. of cor.

Corner is located under E-W wire fence, on a W. open slope, and about 9 chs. dist. E. of edge of bottom land along Yellowstone River

At the cor. of secs. 27, 28, 33 and 34, which is mkd. by a granite stone, 13x9x9 ins., firmly set, mkd. 1 notch on S. and 3 notches on E. edge; witnessed by a small mound of stone, W. of cor.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, over broken glass, with original cor. buried on S. side of post; brass cap mkd.

| | |
|------|-----|
| T2N | R4W |
| S28 | S27 |
| S33 | S34 |
| 1961 | |

Place collar of rock around post, and rebuild mound of stone to W.

Cor. is located on a gradual W. slope in open sagebrush, and E. 50 lks. dist. of a 4 wire transmission line bearing nearly N. and S.

Chains

At the $\frac{1}{4}$ sec. cor. of secs. 27 and 28, which is mkd. by a granite stone, 14x9x8 ins., loosely set in a small mound of stone, mkd. $\frac{1}{4}$ on W. face; no other accessories.

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground over broken glass; original cor. buried on E. side of post; brass mkd.

T2NR4W

$\frac{1}{4}$

S28|S27

1961

Place collar of rock around post, and raise a mound of stone, 3x2 ft W. of cor.

Cor. is located in sagebrush flat, 52 lks. dist. E. of unimproved road, bears nearly N. and S. about $\frac{1}{4}$ mile dist. to power-house.

At the $\frac{1}{4}$ sec. cor. of sec. 21 and 22, which is mkd. by a granite stone, 14x9x5 ins., plainly mkd. $\frac{1}{4}$ on one face, lying in hole, and witnessed by a small mound of stone on the W.

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground over broken glass, with original cor. buried on E. side of post; brass cap mkd.

$\frac{1}{4}$

S21|S22

T2N|R4W

1961

Raise a mound of stone, around cor.

Cor. is located in sagebrush flat, in W. edge of dim old road, bearing N. 20° E. and S. 10° W., and in old dilapidated log fence bearing E. and S. 65° W.

At the cor. of secs. 4, 5, 32 and 33, established in the "1903" resurvey of the S. bdy. of Tp. and later changed to refer to secs. 4 and 5 only, which is mkd. by a granite stone, 14x12x4 ins., firmly set, mkd. 2 notches on W. and 4 notches on E. edge; witnessed by a mound of stone, SW. of cor.

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground over broken glass; original cor. buried on N. side of post; brass cap mkd.

T2N R4W

S 5 | S 4

T1N

1961

Place collar of rock around post.

Cor. is located in wire fence, bears E. and about N. 60° W. No evidence found of CC sec. 32 & 33, recorded being E. 53 lks. dist.

U. S. Mer. R. 5 W. U.S. Mer.

Chains

The survey of the N., W. & E. boundaries, the subdivisions and the resurvey of south boundary of T. 2 N., R. 5 W., Uintah Special Meridian, Utah, was executed by J. C. Dick and A. K. Tiernan, in 1903. The South boundary was originally surveyed by D. G. Major, in 1882.

The following field notes are those of the remonumentation of certain corners along the south boundary of T. 2 N., R. 5 W., and one corner on West boundary of T. 1 N., R. 5 W. The position of each corner was marked by the original monument.

The corners remonumented were selected by the Forest Service as being adjacent to, or controlling the boundaries of Forest Service Lands. The monumentation was requested by and accomplished in cooperation with the Forest Service.

S. Bdy. T. 2 N., R. 5 W.

At the cor. of secs. 4 and 5 on N. bdy., T. 1 N., R. 5 W., which is mkd. by a granite stone, 23x11x10 ins., firmly set, mkd. with 4 grooves on E. and 2 grooves on W. face; witnessed by a mound of stone, 2x2 ft., 5 lks. W. of cor., and 1 bearing tree.

A yellow pine, 20 ins. diam., bears S. 89° E., 86 lks. dist., mkd. T2N R5W S33 BT. (This bearing tree not recorded in survey record).

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with cor. stone buried on E. side of post; brass cap mkd.

| | |
|------|-----|
| T2N | R5W |
| S33 | |
| S 5 | S 4 |
| T1N | R5W |
| 1961 | |

A galvanized pipe, 2½ ins. diam., with screw cap (unmarked) was found along N. side of the cor.

Cor. is located on medium steep E. slope, 8 lks. N. of E-W Forest Service wire fence, and about 10 chs. W. of road in bottom of swale, drains SE. This cor. is E. 2.88 chs. dist. (record 2.92 chs.) of the cor. of secs. 32 and 33.

At the cor. of secs. 32 and 33, on S. bdy. of Tp., which is mkd. by a granite stone, 14x13x9 ins., firmly set, mkd. 4 notches on E. and 2 notches on W. edge; witnessed by a mound of stone, 2x1 ft. N. of cor.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground, over broken glass, and original cor. buried on W. side of post; brass cap mkd.

| | |
|---------|-----|
| T2N | R5W |
| S32 S33 | |
| S 5 | |
| T1N | |
| 1961 | |

from which I mark

Chains

A yellow pine, 25 ins. diam., bears N. 65° W., 28 lks. dist., mkd. T2N R5W S32 BT. Cor. is located on steep E. slope, 2 lks. N. of E-W wire fence, and about 1 ch. E. of top of the steep E. slope.

At the 1/4 sec. cor. of sec. 5, on N. bdy. T. 1 N., R. 5 W., which is mkd. by a granite stone, 18x9x7 ins., firmly set, mkd. 1/4 on N. face, alongside of which is an Indian Service galvanized pipe, 2 1/2 ins. 2 ft. long, with iron screw cap mkd.

1959
T2NR5W
1
4
TLNR5W
S 5

witnessed by a mound of stone, 3x3 ft., 4 lks. N. of cor., and 1 old bearing tree.

An aspen, 12 ins. diam., bears S. 23° E., 29 lks. dist., mkd. in the bark 1/4 S5 BT, (this tree not recorded in survey record)

At cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, original cor. buried on E. side of post, and pipe on the W. side; brass cap mkd.

T2NR5W
1/4
S 5
T1N
1961

Cor. is located on slight E. slope, 3 lks. N. of E-W wire fence, and about 4 chs. W. of small drain in swale, and about 5 chs. W. of logging road, bearing nearly N. and SE.

At the cor. of secs. 31 and 32, on S. bdy. of Tp., which is mkd. by a granite stone, 18x8x5 ins., firmly set, mkd. with 5 notches on E. and 1 notch on W. edge; witnessed by a mound of stone, 2x1 1/2 ft. 4 ft. N. of cor.

At cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with original stone buried on S. side of post; brass cap mkd.

T2N | R5W
S31 | S32
T1N
1961

from which I mark

A lodgepole pine, 12 ins. diam., bears N. 78° E., 28 1/2 lks. dist., mkd. T2N R5W S32 BT.

A lodgepole pine, 12 ins. diam., bears N. 45° W., 29 lks. dist., mkd. T2N R5W S31 BT.

Cor. is located on steep E. slope, 2 lks. N. of E-W wire fence, and about 5 chs. E. of ridge.

Chains

Note: From the above cor., E. about 3.25 chs. dist., and N. 25 lks. from the E-W wire fence I found the cor. of secs. 5 and 6, on N. bdy. T. 1 N., R. 5 W., a granite stone, 14x9x5 ins., firmly set, mkd. 5 grooves on E. and 1 groove on W. face; unwitnessed. I raise a mound of stone, 3x1 ft., S. of cor., (not remonumented).

At the $\frac{1}{4}$ sec. cor. on S. bdy. sec. 31, which is mkd. by a granite stone, 18x12x5 ins., firmly set, dimly mkd. $\frac{1}{4}$ on N. face; witnessed by 2 old bearing trees.

A lodgepole pine, 14 ins. diam., bears N. 31° E., 7 lks. dist., mkd. $\frac{1}{4}$ S31 BT.

A lodgepole pine, 12 ins. diam., bears S. 6 $\frac{1}{2}$ ° W., 12 $\frac{1}{2}$ lks. dist., mkd. $\frac{1}{4}$ S6 BT, (these bearing trees were not recorded in original survey record.)

At cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with original cor. buried on N. side of post; brass cap mkd.

T2NR5W
 S31
 $\frac{1}{4}$
1961

Place collar of rock around post, and raise a mound of stone, 2x1 $\frac{1}{2}$ ft., N. of cor.

Cor. is located on a W. slope, 7 lks. N. of old down, E-W wire fence.

Position of this cor. was verified by measurement from the SW. cor. of Tp. No evidence could be found of the $\frac{1}{4}$ sec. cor. for N. bdy. sec. 6.

At the cor. of Tps. 1 and 2 N.; Rs. 5 and 6 W., which is mkd. by a granite stone, 15x9x9 ins., firmly set, mkd. with 6 notches on 4 edges, 1 N on SE. face; witnessed by 1 dead bearing tree.

A dead, fallen pine, mkd. T1NR5WS6BT., bears S. 38° E., 22 lks.

The other bearing trees have all been logged off.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, over broken glass, original cor. buried on W. side of post; brass cap mkd.

T2N
R6W | R5W
S36 | S31
S 1 | S 6
T1N
1961

from which I mark

A lodgepole pine, 14 ins. diam., bears S. 31° E., 72 lks. dist., mkd. T1N R5W S6 BT.

Alongside of the cor. I found an Indian Service iron pipe, 2 ft. long, 2 $\frac{1}{2}$ ins. diam., with iron cap mkd.

Remonumentation of Cors. in T. 2 N., R. 5 W.

Chains

1959
 T2N
 S36 | S31
 R6W | R5W
 S 1 | S 6
 T1N

I reset this pipe alongside of my post.

Cor. is located on slight NE. slope, 2 lks. N. of cedar post at cor. of old down wire fences bearing E. and S., and 1 ch. E. of logging road bearing NE. and SW.

W. Bdy. T. 1 N., R. 5 W.

At the 1/4 sec. cor. of secs. 1 and 6, on W. bdy., T. 1 N., R. 5 W., which is mkd. by a granite stone, 15x12x8 ins., firmly set, mkd. 1/4 on W. face; witnessed by 2 fallen bearing trees, each properly mkd.

At cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with original cor. buried on W. side of post; brass cap mkd.

T1N
 1/4
 S 1 | S 6
 R6W | R5W
 1961

from which I mark

A lodgepole pine, 16 ins. diam., bears N. 67° E., 89 lks. dist., mkd. 1/4 S6 BT.

A lodgepole pine, 10 ins. diam., bears S. 54° W., 33 lks. dist., mkd. 1/4 S1 BT.

Cor. is located on slight W. slope, in N-S wire fence. Area W. of line has been logged off.

Location of Corners T. 2 N., R. 9 W., U. S. Mer.

Chains

The survey of the north and west boundaries and the subdivisions of T. 2 N., R. 9 W., Uintah Special Meridian, Utah, was executed by John W. McKim, B.S., in 1903. The south and east boundaries were surveyed by Fred Johnson, in 1903. The Uintah Reservation Boundary was surveyed by A. H. and F. M. Brown, in 1903.

The following field notes are those of the remonumentation of certain identified original corners in T. 2 N., R. 9 W., U. S. Mer. The position of each corner was marked by the original monument. The corners remonumented were selected by the Forest Service as being adjacent to, or controlling the boundaries of Forest Service Lands. The monumentation was requested by and accomplished in cooperation with the Forest Service.

T. 2 N., R. 9 W., U. S. Mer.

At the $\frac{1}{4}$ sec. cor. of secs. 35 and 36, which is mkd. by a granite stone, 13x9x7 ins., firmly set, mkd. $\frac{1}{4}$ on W. face; witnessed by a mound of stone, 2x1 $\frac{1}{2}$ ft., W. of cor.

At cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with original cor. buried on N. side of post; brass cap mkd.

T2N R9W
 $\frac{1}{4}$
 S35|S36
 1961

Cor. is located 1 $\frac{1}{2}$ ft. N. of cor. fence post, fences bearing S. and E., and about 4 chs. E. of main dirt road along E. side of Duchesne River.

At the cor. of secs. 25, 26, 35 and 36, which is mkd. by a sandstone, 18x9x3 ins., firmly set, mkd. with 1 groove on S. and E. sides; witnessed by a mound of stone, 2x1 $\frac{1}{2}$ ft., W. of cor.

At cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, over broken glass; original cor. buried on W. side of post; brass cap mkd.

T2N | R9W
 S26 | S25
 S35 | S36
 1961

Cor. is located on nearly level ground in grove of small aspen, and about 60 lks. W. of small irrigation ditch, drains S.

189
CERTIFICATE OF CADASTRAL ENGINEER

I, Andrew Nelson, HEREBY CERTIFY upon honor that, pursuant of special instructions bearing date of the 15th day of _____ I have ~~surveyed~~ **remonumented corners in Townships 2 North, Ranges 1, 2, 4, 5 and 9 West and along the east line of the Uintah Indian Reservation.**

of the Uintah Special Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in the specific manner described in the foregoing field notes.

Salt Lake City, Utah
July 9, 1962

Andrew Nelson
Andrew Nelson - Cadastral Surveyor

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT,
Washington, D. C., MAY 1 1963, 19____

The foregoing field notes of the ~~survey of~~ **remonumentation of corners in Townships 2 North, Range 1 East and Ranges 1, 2, 4, 5 and 9 West and along a portion of the Uintah Indian Reservation, Uintah Special Meridian, Utah.**

executed by Andrew Nelson, Cadastral Surveyor having been critically examined and found correct, are hereby approved.

St. J. Jamington
Cadastral Engineering Staff Officer
Chief, Division of Engineers

CERTIFICATE OF TRANSCRIPT

I CERTIFY that the foregoing transcript of the field notes of the above-described surveys in _____, is a true copy of the original field notes.

Cadastral Engineering Staff Officer.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

ORIGINAL

FIELD NOTES

OF THE

REMONUMENTATION OF U.S.L.M. No. 270

AND CORNERS ON HOMESTEAD ENTRY SURVEYS

Nos. 129, 64, 130, 62 and 105

ALL SITUATED IN TOWNSHIP 2 NORTH, RANGE 22 EAST

AND ON HOMESTEAD ENTRY SURVEYS

Nos. 61, 60, 65, 66, 124 and 128

AND U.S.L.M. Nos. 255 and 258

ALL SITUATED IN UNSURVEYED PORTION

OF TOWNSHIP 2 NORTH, RANGE 21 EAST

AND REMONUMENTATION OF CORNERS

IN TOWNSHIP 3 NORTH, RANGE 22 EAST,

TOWNSHIP 2 NORTH, RANGE 23 EAST AND TOWNSHIP 3 SOUTH, RANGE 19 EAST

Of the SALT LAKE Meridian,

the State of UTAH

EXECUTED BY

Andrew Nelson, Cadastral Surveyor

Under special instructions dated February 15, 1961, which provided

for the surveys included under Group No. 447, approved February 16, 1961.

Assignment instructions dated April 27, 1961.

Survey commenced May 4, 1961.

Survey completed May 21, 1961.

R570


INDEX DIAGRAM

Township _____, Range _____

| | | | | | |
|----|----|----|----|----|----|
| 6 | 5 | 4 | 3 | 2 | 1 |
| 7 | 8 | 9 | 10 | 11 | 12 |
| 13 | 17 | 16 | 15 | 14 | 13 |
| 19 | 20 | 21 | 22 | 23 | 24 |
| 30 | 29 | 28 | 27 | 26 | 25 |
| 31 | 32 | 33 | 34 | 35 | 36 |

CORNER REMONUMENTATION INDEX DIAGRAM


Township 2 North, Range 22 East, Salt Lake Meridian

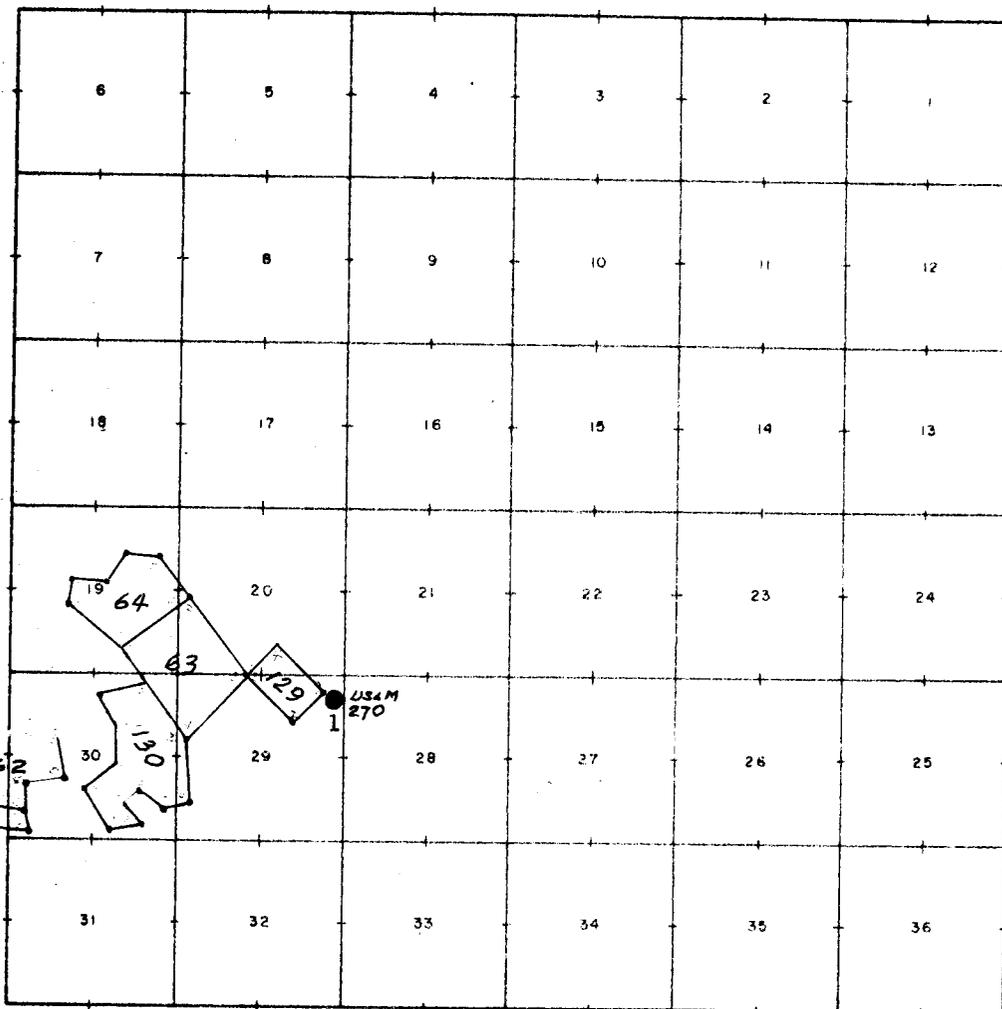

- H.E.S. No. 129, pages 1, 2
- H.E.S. No. 64, 3, 4, 5
- H.E.S. No. 130, 6, 7, 8
- H.E.S. No. 62, 8, 9, 10
- H.E.S. No. 105, 11, 12
- U.S.L.M. No. 270, 1

CORNER REMONUMENTATION INDEX DIAGRAM


Township 2v North , Range 21 East , Salt Lake Meridian

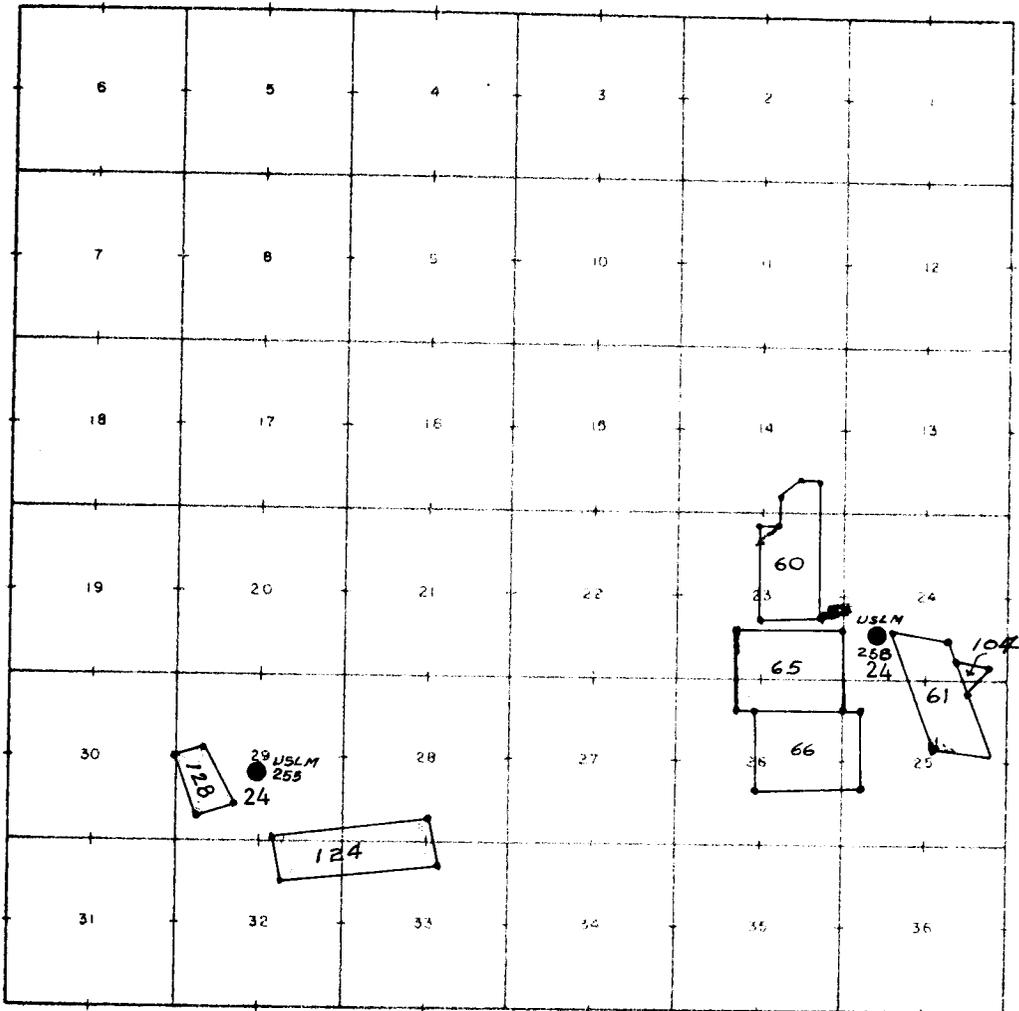

- H.E.S. No. 60, pages 15, 16, 17
- H.E.S. No. 61, 13
- H.E.S. No. 65, 17, 18, 19
- H.E.S. No. 66, 19, 20
- H.E.S. No. 104, 14, 15
- H.E.S. No. 124, 21, 22
- H.E.S. No. 128, 22, 23
- U.S.L.M. No. 255, 24
- U.S.L.M. No. 258, 24


CORNER REMONUMENTATION INDEX DIAGRAM

Township 3 North, Range 22 East, Salt Lake Meridian

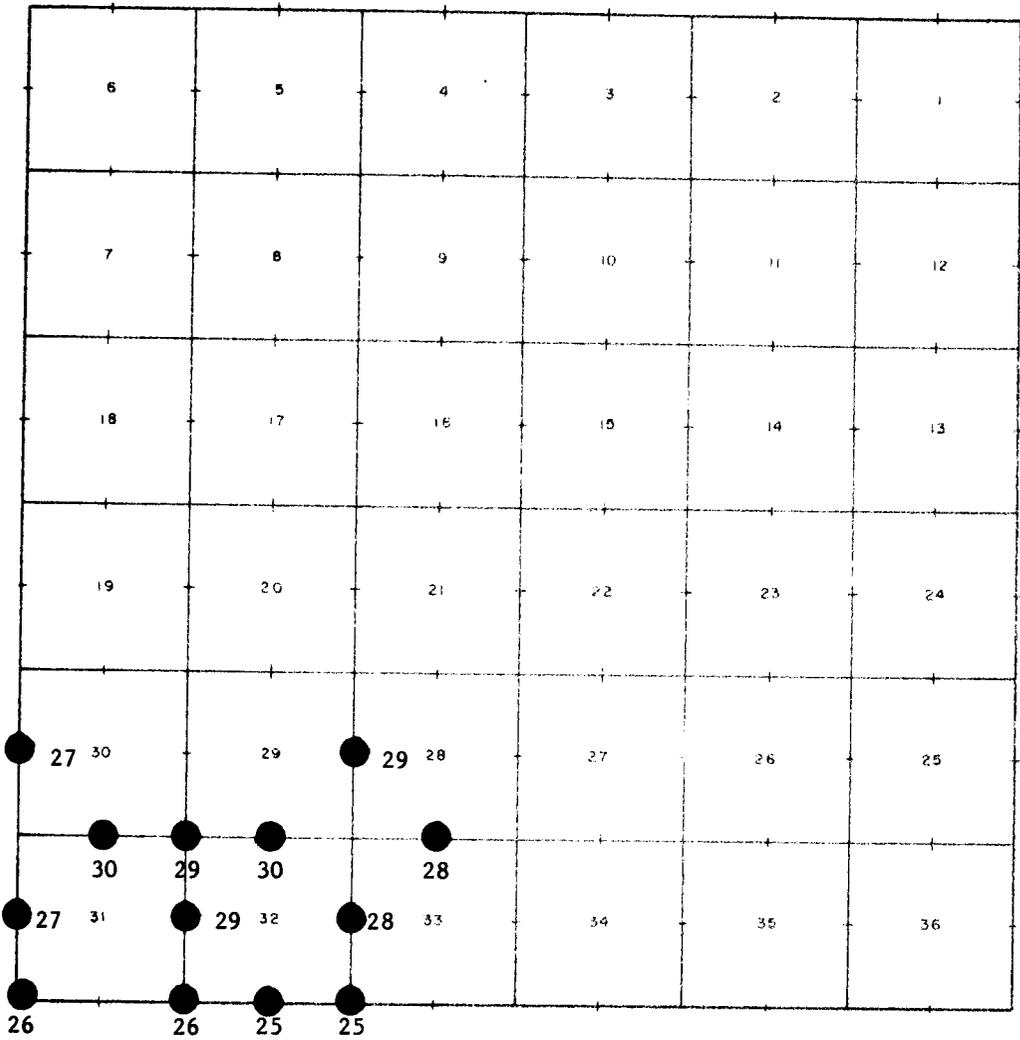


CORNER REMONUMENTATION
INDEX DIAGRAM

Township 2 North Range 23 East Salt Lake Meridian

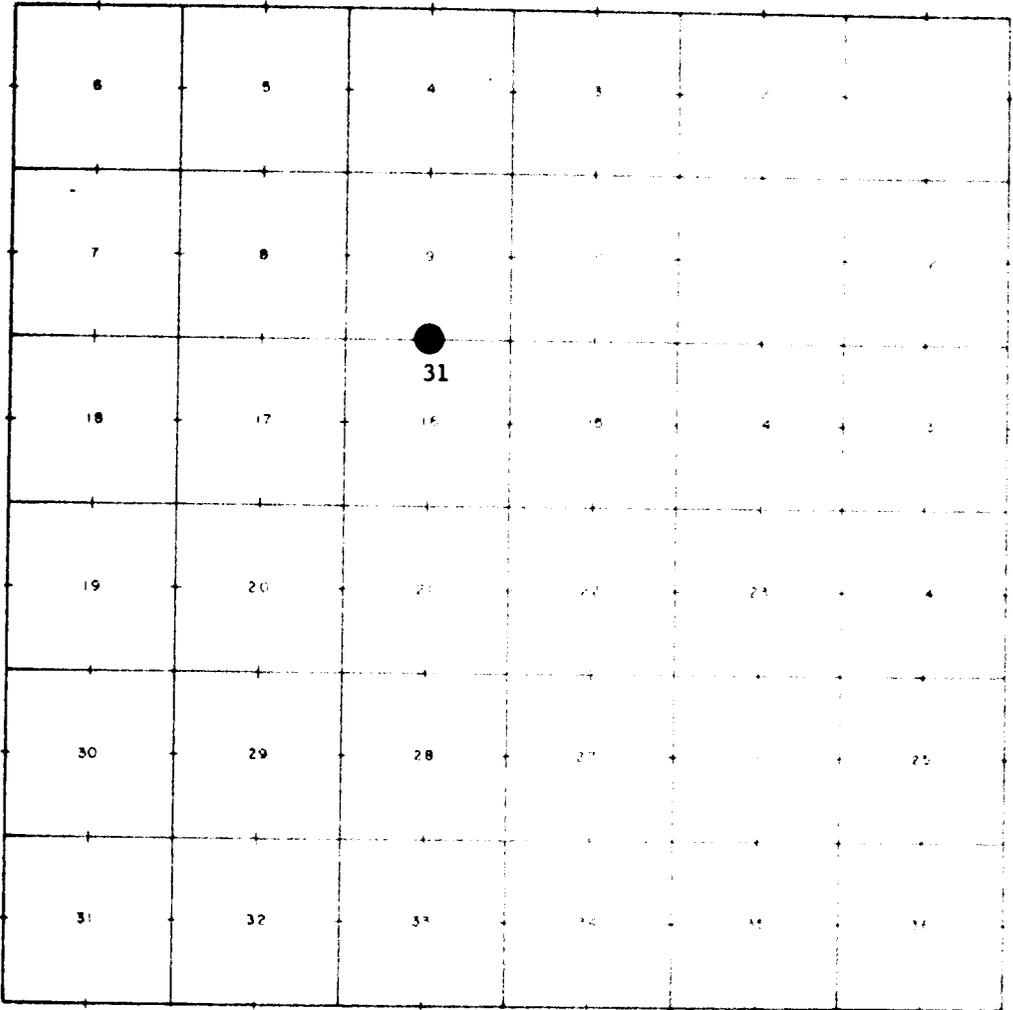

CORNER REMONUMENTATION INDEX DIAGRAM

Township 35, Range 19E, Meridian

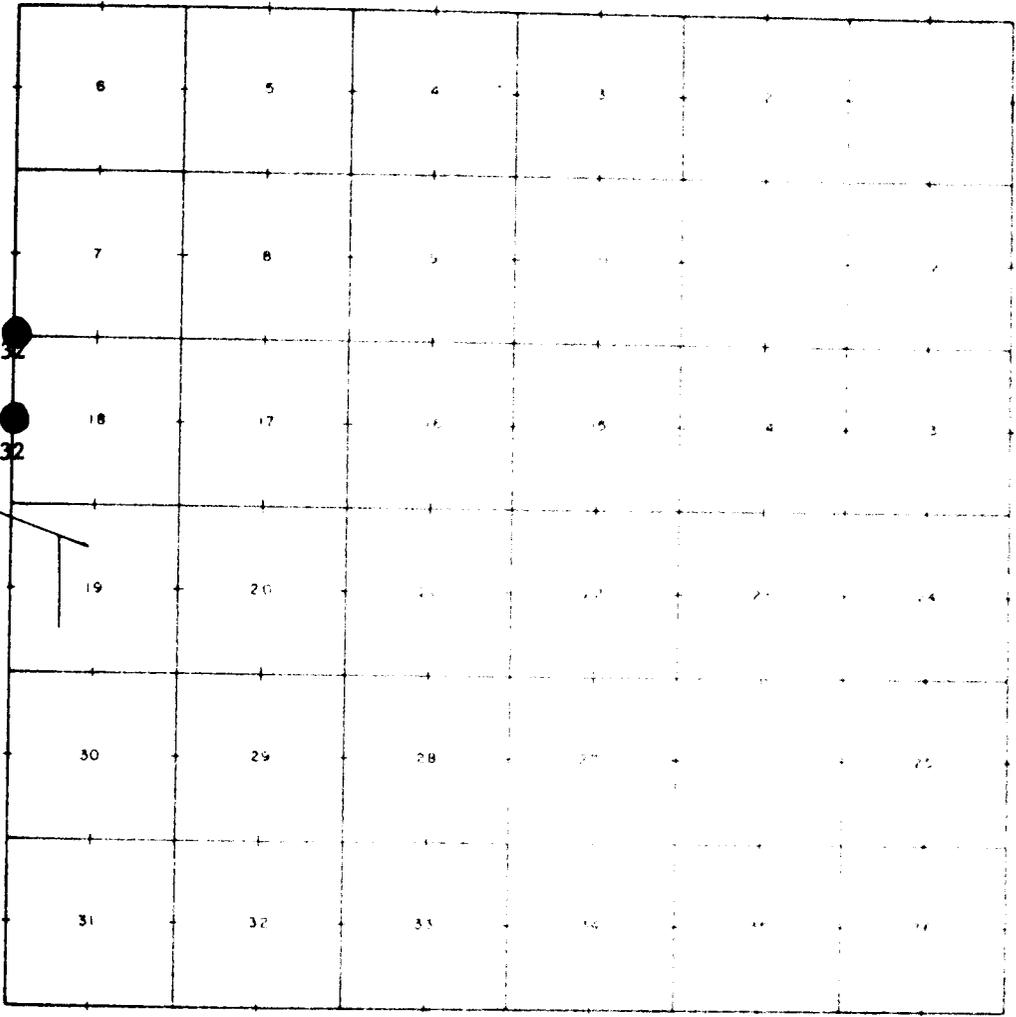

Remonumentation of Corners on H.E.S. No. 129, and U.S.L.M. No. 270

Chains

The following field notes are those of the remonumentation of U.S.L.M. No. 270, and certain identified original corners on Homestead Entry Surveys (H.E.S.), Nos. 129, 64, 130, 62 and 105, situated in T. 2 N., R. 22 E., Salt Lake Meridian, Utah. The township is located within the Ashley National Forest. The portion lying N. of the Green River was surveyed by S. P. and J. R. Stewart in 1906. The part lying S. of the Green River was surveyed by J. C. Clark in 1938.

The U. S. L. M. No. 270, located in sec. 29, was established in connection with the survey of H.E.S. No. 129, located in secs. 20 and 29, and executed by Marshall S. Wright, Surveyor, U. S. Forest Service, in 1919.

The corners remonumented were selected by the Forest Service as being adjacent to, or controlling the boundaries of Forest Service Lands. The remonumentation was requested by and accomplished in cooperation with the Forest Service. The position of each corner was marked by the original monument, or determined from corner accessories recorded in the original survey record.

U.S.L.M. No. 270

At the U.S.L.M. No. 270, which is marked by a cross (X) with USLM 270 chiseled into top of red granite ledge outcrop, 3 ft. from S. edge; witnessed by the 4 original bearing trees in good condition, and a mound of stone, 3x2 ft., 6 ft. N. of the cross; original bearing trees:

A yellow pine, 16 ins. diam., bears S. 38° 12' W., 124 lks. dist.

A yellow pine, 16 ins. diam., bears S. 9° 56' E., 96 lks. dist.

A yellow pine, 18 ins. diam., bears S. 11° 06' W., 69 lks. dist.

All properly mkd. with (X) USLM 270 BT

At cor. point

Set an iron post, 1 in. diam., 10 ins. long, cemented in a drill-hole 8 ins. deep; brass cap mkd.

USLM



270
1961

The record tie from Cor. No. 1, HES No. 129, to this monument is S. 61° 51' E., 8.45 chs. dist.

H.E.S. No. 129

At cor. No. 1, HES #129, which is marked by a cross with 1-HES 129, chiseled in top of flat red granite outcrop, showing 20x20x3 ft.; no accessories remaining, original bearing trees have been destroyed by Highway.

At cor. point

Set an iron post, 1 in. diam., 10 ins. long, cemented in a drill hole 5 ins. deep; with brass cap mkd.

HES
129
1961

Chains

Corner is located 80 lks. E. of the approximate center of State way No. 260, and about 30 ft. N. of cattle guard across road.

At cor. No. 2-HES #129, which is marked by a red granite stone, 33x10x7 ins., firmly set, mkd. 2 HES 129 on side facing claim; from which

A pine stump 2 ft. high, 16 ins. diam., with the trunk of original bearing tree lying alongside, on which are found scribe marks partly overgrown, bears S. 64° W., 24 lks. dist.

There is no remaining evidence of the other BT, point falls in clear field.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground to solid rock, original cor. buried alongside; brass cap mkd.

HES
129
2
1919
1961

Raise a mound of stone, 4 ft. base, 2 ft. high, NW. of cor. 5 ft. dist. and place collar of rock around post.

Corner is located about 105 lks. W. of oiled Highway No. 260, on curve. Flaming Gorge Lodge, bears nearly N. about 6 chs. dist.

At cor. #3-HES #129 identical with cor. #3 of HES #63, which is marked by a cross, with 3 HES 129 on E., and 3 HES 63 on W. side of the cross, chiseled in top of sandstone outcrop, showing 3x3x1 ft.; witnessed as follows:

- A yellow pine, 12 ins. diam., bears N. 83° E., 92 lks. dist., mkd. X 3 HES 129 BT
- A yellow pine, 26 ins. diam., bears S. 49° E., 108 lks. dist., mkd. X 3 HES 129 BT
- A pine stump, 20 ins. diam., bears N. 42° E., 18 lks. dist., mkd. 3 HES 63 BT
- A pine stump, 10 ft. high, 14 ins. diam., bears S. 62° 45' W., 63 lks. dist., mkd. X 3 HES 63 BT

At cor. point

Set an iron post, 1 in. diam., 10 ins. long, cemented in a drill hole 7 ins. deep; brass cap mkd.

HES
63 3
1961

From which I mark

- A yellow pine, 22 ins. diam., bears S. 5° W., 100 lks. dist., X 3 HES 63 BT

Corner is located 2 lks. S. of cor. of pole fences along claim lines

Re monumentation of Corners on H.E.S. No. 64

Chains

H. E. Survey No. 64, situated in secs. 19 and 20, T. 2 N., R. 22 E., S.L.M., was surveyed by John C. Brown, Forest Ranger, in 1913. All corners on this claim are remonumented.

At cor. No. 1-HES No. 64, which is marked by a sandstone, 28x16x5 ins., firmly set, marked with an X on top, 1 HES 64 on side facing claim; witnessed by dead, fallen bearing trees:

Stump hole, with fallen pine 16 ins. diam., bears N. 18½° W., 128 lks. dist.

Stump hole, with fallen pine 22 ins. diam., bears N. 42° W., 28 lks. dist. Trunks of both trees properly mkd. X 1 HES 64 BT

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground to bedrock, original cor. set alongside, with the X on top destroyed, and supported in a mound of stone to top; brass cap mkd.

1961

From which I mark

A yellow pine, 16 ins. diam., bears N. 45½° W., 166½ lks. dist.

A yellow pine, 15 ins. diam., bears S. 5° E., 157 lks. dist.
Both trees marked X 1 HES 64 BT

Corner is located at cor. of fences on claim lines.

At cor. No. 2-HES No. 64, which is marked by a sandstone in place, showing 32x26x3 ins., above ground, marked with an X, and 2 HES 64 on side facing claim; witnessed by two bearing trees.

A yellow pine, 20 ins. diam., bears S. 42° 22' W., 75 lks. dist.

A dead pine, 30 ins. diam., bears N. 1° 26' W., 26 lks. dist.
Both trees mkd. X 2 HES 64 BT

At cor. point

Set an iron post, 1 in. diam., 12 ins. long, cemented in a drill hole, 9 ins. deep; brass cap marked.

From which I mark

A yellow pine, 20 ins. diam., bears N. 68½° W., 120 lks. dist. Marked X 2 HES 64 BT

At cor. No. 3-HES No. 64, which is marked by an X at exact cor. point with 3 HES 64 chiseled into top of exposed bedrock in place; witnessed by 2 bearing trees.

Chains

A yellow pine, 13 ins. diam., bears N. 52° 45' E., 135 lks. dist.

A yellow pine, 18 ins. diam., bears S. 84° 26' W., 19 lks. dist.

Both marked X 3 HES 64 BT

At the cor. point

Set an iron post, 1 in. diam., 10 ins. long, cemented in a drill hole, 7 ins. deep; brass cap marked.

3

HES 64
1961

Corner is located in log fences, on claim lines.

At cor. No. 4-HES No. 64, which is marked by a cross X with 4 HES 64 chiseled in exposed bedrock, even with surface of ground; witnessed by a mound of stone, and 2 bearing trees:

A yellow pine, 24 ins. diam., bears N. 9½° W., 77 lks. dist.

A red cedar, 15 ins. diam., bears N. 84° W., 78 lks. dist.,

Both marked X HES 64 BT

At cor. point

Set an iron post, 1 in. diam., 10 ins. long, cemented in a drill hole, 8 ins. deep; brass cap mkd.

4

HES 64
1961

Corner is located at cor. of worm fences on claim lines.

At corner No. 5-HES No. 64, which is marked by a cross X on top, 5 HES 64 on side facing claim, on sandstone rock in place, showing 4x4x1 ft. above ground; witnessed by 2 bearing trees:

A yellow pine, 25 ins. diam., bears N. 78° 45' E., 13 lks. dist.

A yellow pine, 28 ins. diam., bears S. 65½° E., 99 lks. dist.

Both marked X 5 HES 64 BT

At cor. point

Set an iron post, 1 in. diam., 12 ins. long, cemented in a drill hole, 8 ins. deep; brass cap mkd.

5

HES 64

1961

At corner No. 6-HES No. 64, identical with corner No. 2-HES No. 63, which is marked by a sandstone 26x20x6 ins., firmly set, mkd. 6 HES 64 on W. face, 2 HES 63 on S. face, and X on top; witnessed by 2 original bearing trees:


Re monumentation of Corners on HES No. 64

Chains

A yellow pine, 34 ins. diam., bears N. 64° 41' W., 86 lks. dist., mkd. X 6 HES 64 BT
 A yellow pine, 47 ins. diam., bears N. 51° 45' E., 24 lks. dist., mkd. X 2 HES 63 BT

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, original cor. buried alongside of post; brass cap mkd.




1961

At cor. No. 7-HES No. 64, identical with cor. No. 1-HES No. 63, mkd. by a red sandstone rock in place, showing 24x24x2 ins. above ground, marked 7 HES 64 on N. face, 1 HES 63 on E. face, and X on top witnessed by 2 original bearing trees:

A yellow pine, 12 ins. diam., bears S. 23¼° E., 170 lks. dist., mkd. 7 HES 64 BT
 A yellow pine, 16 ins. diam., bears S. 82¼° W., 65 lks. dist., mkd. 7 HES 64 BT

At cor. point

Set an iron post, 1 in. diam., 10 ins. long, cemented in a drill hole, 9 ins. deep; brass cap mkd.



1961

Corner is located at cor. of worm fences on all claim lines.

Re monumentation of Corners on H.E.S. No. 130


H. E. Survey No. 130, situated in secs. 29 and 30, T. 2 N., R. 22 E., S.L.M., was surveyed by Marshall S. Wright, Surveyor, U. S. Forest Service, in 1919.

At cor. No. 1-HES No. 64, which is marked by a sandstone, 24x18x8 ins., loosely set 4 ins. in the ground on top of bedrock, over broken glass; marked 1 HES 130 on side facing claim, and an X on top; witnessed by 2 original bearing trees:

A yellow pine, 15 ins. diam., bears N. 86° 35' E., 155 lks. dist.
 A yellow pine, 16 ins. diam., bears N. 62° 05' E., 188 lks. dist.
 Both mkd. X 1 HES 130 BT

At cor. point

Set an iron post, 1 in. diam., 24 ins. long, 4 ins. in the ground to bedrock, and cemented in a drill hole, 9 ins. deep; original cor. stone set alongside of post, and supported in a mound of stone to top; brass cap mkd.



HES
130
1961

Corner is located 15 lks. dist. NW. of cor. of fences bearing about N. 87° E. and S. 37° E., and at E. edge of trail road.

At cor. 3-HES No. 130, identical with cor. 4-HES No. 63, which is marked by a sandstone, 36x22x4 ins., loosely set in small mound of stone, mkd. 3 HES 130 on W. face, 4 HES 63 on N. face; witnessed as follows:

A Yellow pine, 26 ins. diam., bears S. 64½° E., 237 lks. dist., mkd. X 4 HES 63 BT


A pine stump 2 ft. high, 18 ins. diam., bears S. 47½° W., 289 lks. dist., with trunk of tree alongside, mkd. X 3 HES 130 BT

A stump hole, with fallen pine, 18 ins. diam., bears S. 42° W., 250 lks. dist., mkd. X 3 HES 130 BT

A pine stump, 18 ins. high, bears N. 86½° W., 468 lks. dist. mkd. BT.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground to bedrock, original cor. stone set on N. side of post, and supported in a mound of stone to top; brass cap mkd.



HES
63
HES
130
3
4
1961

From which I mark

A yellow pine, 24 ins. diam., bears S. 11° E., 275 lks. dist., mkd. X 3 HES 130 BT

Corner is located 2½ lks. dist. N. of a power pole, and at cor. of fences.


At cor. 4-HES No. 130, which is marked by a granite stone, 25x15x4 ins., firmly set, marked 4 HES 130 on NW. face; witnessed by a mound of stone within the claim, and 1 bearing tree and 1 stump of original BT.

A yellow pine, 15 ins. diam., bears N. 22° 05' E., 99 lks. dist., marked X 4 HES 130 BT

A pine stump, 16 ins. diam., bears N. 82° E., 42 lks. dist., no remaining marks.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground to bedrock, original cor. set on W. side of post, and supported in a mound of stone; brass cap mkd.



HES 4
130
1961

Remonumentation of Corners on HES No. 130

Chains

From which I mark

A yellow pine, 16 ins. diam., bears S. $23\frac{1}{2}^{\circ}$ E., 107 lks. dist.,
mkd. X 4 HES 130 BT

Corner is set in worm fence.


At cor. No. 5-HES No. 130, which is marked by a cross (X) with HES
130 alongside, chiseled in flat exposed bedrock, showing 3x2 ft.
witnessed as follows:

A yellow pine, 17 ins. diam., bears N. $66\frac{1}{2}^{\circ}$ E., 27 lks. dist.,
mkd. X 5 HES 130 BT

A stump hole, with original tree trunk lying on ground, properly
mkd., bears S. 5° E., 59 lks. dist.

At cor. point

Set an iron post, 1 in. diam., 14 ins. long, cemented in a drill
hole, 6 ins. deep; brass cap mkd.



HES
130
5
1961

from which I mark

A yellow pine, 12 ins. diam., bears S. $22\frac{1}{2}^{\circ}$ W., 69 lks. dist.,
mkd. X 5 HES 130 BT

Corner is located on the S. side of worm fences bearing NW., easterly
and westerly.

At cor. No. 6-HES No. 130, which is marked by a Forest Service post,
2 ins. diam., properly set and marked as recorded in original record;
witnessed by 1 bearing tree.

A yellow pine, 17 ins. diam., bears S. $69^{\circ} 12'$ E., 66 lks.
dist., marks partially overgrown.

The other bearing tree has been destroyed.

I mark new bearing tree as follows: from cor.

A yellow pine, 16 ins. diam., bears S. $54\frac{1}{2}^{\circ}$ W., 17 lks. dist.,
mkd. X 6 HES 130 BT

At cor. No. 8-HES No. 130, which is marked by a Forest Service post,
2 ins. diam., properly set and marked as described in original
record; witnessed as follows:

A yellow pine, 25 ins. diam., bears N. $47^{\circ} 20'$ W., 120 lks.
dist., mkd. X 8 HES 130 BT

A pine stump $1\frac{1}{2}$ ft. high, 18 ins. diam., bears S. 64° W.,
121 lks. dist., no remaining marks.

I mark new bearing tree as follows; from cor.

Remonumentation of Corners on H.E.S. No. 130

Chains

A yellow pine, 14 ins. diam., bears S. 82° W., 109 lks. dist., mkd. X 8 HES 130 BT.

At cor. No. 9-HES No. 130, which is marked by a sandstone, 28x10x8 ins., firmly set, marked 9 HES 130 on NE. face, and X on top (des the X on top) witnessed as follows:

A yellow pine, 18 ins. diam., bears N. 71° 05' E., 218 lks. dist., marks overgrown.

A stump hole, with fallen trunk on ground, bears N. 5° E., 202 lks. dist.; mks. overgrown.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground to rock, original cor. set on N. side of post; supported in a mound of stone to top; brasscap mkd.

HES 130
9
1961

from which I mark

A yellow pine, 16 ins. diam., bears S. 47° E., 181 lks. dist., mkd. X 9 HES 130 BT.

Corner is located at cor. of worm fences, parallel to claim lines.

At cor. No. 10-HES No. 130, which is marked by a Forest Service post, 2 ins. diam., properly set and marked as described in original record; witnessed as follows:

A yellow pine, 30 ins. diam., bears S. 54° W., 26 lks. dist., mkd. X 10 HES 130 BT.

A sawed pine stump, 1 ft. high, with tree trunk lying alongside bears N. 80° W., 73 lks. dist.

I mark new bearing tree; from cor.

A yellow pine, 20 ins. diam., bears N. 38½° W., 122 lks. dist., mkd. X 10 HES 130 BT.

Corner is located in fence corner, and 4 lks. SW. from a power pole.

Remonumentation of Corners on H.E.S. No. 62

H. E. Survey No. 62; situated partly in sec. 30, T. 2 N., R. 22 E., and partly in sec. 25, T. 2 N., R. 21 E., (unsurveyed was surveyed by John C. Brown, Forest Ranger, in 1913.

At cor. No. 4-HES No. 62, which is marked by a sandstone, 20x15x9 ins., firmly set, mkd. 4 HES 62 on side facing claim; from which

A yellow pine, 24 ins. diam., bears S. 52½° E., 273 lks. dist., blazed, marks overgrown.

There is no remaining evidence of the other original bearing tree.

Remonumentation of Corners on H.E.S. No. 62

Chains

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 27 ins. in the ground, over broken glass and rock 5x4x3 ins. mkd. X, with original cor. stone buried on N. side of post; brass cap mkd.

HES
4
62 |
1961

from which I mark

A yellow pine, 19 ins. diam., bears N. 52° E., $78\frac{1}{2}$ lks. dist., mkd. X 4 HES 62 BT.

Corner is located 2 lks. W. of corner of fences bearing with claim lines, and about 25 lks. dist. NE. of small shed.

At cor. No. 5-HES No. 62, which is marked by a sandstone, 29x16x8 ins., firmly set in ground and in a mound of stone, mkd. 5 HES 62 on W. side; from which

A yellow pine, 20 ins. diam., bears N. $11\frac{1}{2}^{\circ}$ W., 11 lks. dist., mkd. X 5 HES 62 BT.

A rotted pine stump 1 ft. high, 14 ins. diam., bears N. $58\frac{1}{2}^{\circ}$ W., 65 lks. dist., no marks remaining.

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins. in the ground to bedrock, over broken glass, original cor. set along W. side of post; supported in large mound of stone to top; brass cap mkd.

HES
62 5

1961

from which I mark

A yellow pine, 15 ins. diam., bears S. 85° E., 97 lks. dist., mkd. X 5 HES 62 BT.

At cor. No. 6-HES No. 62, which is marked by a sandstone, 36x18x6 ins., firmly set in ground and in a mound of stone, marked 6 HES 62 on SW. face, and X on top (destroy the X); from which

A yellow pine, 30 ins. diam., bears N. 67° W., 182 lks. dist., mkd. X 6 HES 62 BT.

A sawed pine stump 2 ft. high, 30 ins. diam., bears N. 77° 45' E., 105 lks. dist.; no marks remaining.

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins. in the ground to bedrock, original cor. stone set along SW. side of post, and supported in a large mound of stone; brass cap mkd.

6
HES 62

1961

Chains

from which I mark

A yellow pine, 14 ins. diam., bears N. 21° E., $232\frac{1}{2}$ lks. dist., mkd. X 6 HES 62 BT.

Corner is located at corner of worm fences, bears with claim lines.

At cor. No. 7-HES No. 62, which is marked by a sandstone, $22 \times 16 \times 6$ ins., firmly set, marked 7 HES 62 on S. face; witnessed by a mound of stone on the N., and 1 dead remaining original bearing tree.

A dead pine, 24 ins. diam., bears S. 2° E., 111 lks. dist., mkd. 7 HES 62.

The other original bearing tree has been destroyed by fire.

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 14 ins. in the ground to bedrock, over small stone mkd. X, and with original cor. set at N. side of post; and supported in a mound of stone to top; brass cap mkd.

7
HES 62
1961

from which I mark

A yellow pine, 22 ins. diam., bears N. $51\frac{1}{2}^{\circ}$ E., 102 lks. dist.

A yellow pine, 19 ins. diam., bears N. 32° W., 98 lks. dist.

Both marked X 7 HES 62 BT.

Corner is located on the N. side of worm fence along claim lines, and about 1 ch. N. of old blacksmith shop.

At cor. No. 8-HES No. 62, identical with cor. No. 3-HES No. 61, which is marked by a granite stone, firmly set and properly marked, found lying under a large granite boulder, $4\frac{1}{2} \times 3\frac{1}{2} \times 2$ ft. Being unable to remove the original cor. stone on account of said boulder, I re-monument cor. at point on top of boulder 2 ft. directly above the X on original cor. stone, where

Set an iron post, 1 in. diam., 12 ins. long, cemented in a drill hole 9 ins. deep; brass cap marked.

HES

61

3

HES 62

1961

Corner is located 5 lks. S. of pole fence bearing easterly and westerly, and 20 lks. W. of fence to the S.

Re-monumentation of Corners on H.E.B. No. 105

H. E. Survey No. 105, situated partly in sec. 30, T. 2 N., R. 22 E., and partly in sec. 25, T. 2 N., R. 21 E. (unsurveyed) was surveyed by W. B. Rice, Forest Examiner, in 1916.

Re monumentation of Corners on H.E.S. No. 105

Chains

At cor. No. 1-HES No. 105, which is marked by a sandstone, 22x14x6 ins., firmly set, marked 1 HES 105 on S. side; witnessed as follows:

A sandstone in place, showing, 3x2x1 ft., marked with a cross (X) and 1 HES 105, bears S. 25° 45' W., 56 lks. dist.
 A sandstone in place, showing 3x2½x1 ft., marked by a cross (X) and 1 HES 105, bears S. 71° 40' W., 41 lks. dist.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with original cor. stone buried on S. side of post; brass cap mkd.

HES 61

1
|
HES
105

1961

Corner is located under worm fence, bearing E-W along claim line.

At cor. No. 4-HES No. 105, identical with cor. No. 3-HES No. 62, which is marked by a sandstone, 22x16x7 ins., firmly set, marked 4 HES 105 on SW., and 3 HES 62 on NW. face; witnessed by 1 bearing tree.

A yellow pine, 28 ins. diam., bears S. 85° 45' E., 268 lks. dist. mkd. X 3 HES 62 BT.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with original cor. buried on SE. side of post; brass cap mkd.

HES
62
|
3
—|
4
|
HES
105
1961

from which I mark

A yellow pine, 16 ins. diam., bears N. 47½° E., 148 lks. dist., mkd. 3 HES 62 BT.

Corner is located under a worm fence.

At cor. No. 5-HES No. 105, which is marked by a sandstone, 28x14x8 ins., loosely set, marked 5 HES 105 on NW. face; witnessed by a mound of stone, 4x2 ft. NW., and 2 bearing trees.

A yellow pine, 24 ins. diam., bears N. 52½° W., 73 lks. dist., blazed, marks overgrown.

A yellow pine, 35 ins. diam., bears N. 69° 09' E., 181 lks. dist. mks. partially overgrown, HES 105 BT. visible.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground over glass deposit with original cor. buried on W. side of post; brass cap mkd.

Remonumentation of Corners on

Chains

HES
105 5
1961

A cabin bears NW. about 2 chs. dist.

At cor. No. 6-HES No. 105, which is marked by a sandstone, 20x18x12 ins., firmly set, marked 6 HES 105 on side facing claim; from which

An aspen stump 5 ft. high, 10 ins. diam., bears S. $84\frac{1}{2}^{\circ}$ E., 74 lks. dist., mkd. 6 HES 105 BT.

No remaining evidence of the other BT., falls in road.

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 27 ins. in the ground, with original cor. buried on NE. side of post; brass cap mkd.

HES
105
6
1961

from which I mark

An aspen, 8 ins. diam., bears S. $2\frac{1}{2}^{\circ}$ E., 66 lks. dist.

An aspen, 10 ins. diam., bears S. 86° E., 68 lks. dist.

Both mkd. X 6-105-BT.

Corner is located at cor. of fences, which bears with claim lines.

Re monumentation of Corners on H.E.S. No. 61

Chains

The following field notes are those of the remonumentation of identified original corners on Homestead Entry Surveys Nos. 60, 61, 65, 66, 104, 124, and 128, and U.S.L.M. Nos. 255 and 258, all situated in the unsurveyed portion of T. 2 N., R. 21 E., Salt Lake Meridian, Utah, lying south of the Green River. The portion of T. 2 N., R. 21 E. north of the Green River was surveyed by S. P. and J. R. Stewart, in 1906. The township is located within the Ashley National Forest.

The corners remonumented were selected by the Forest Service as being adjacent to, or controlling the boundaries of Forest Service Lands. The remonumentation was requested by and accomplished in cooperation with the Forest Service. The position of each corner was marked by the original monument, or determined from corner accessories recorded in the original survey record.


H.E.S. No. 61

H. E. Survey No. 61, situated in unsurveyed secs. 24 and 25, T. 2 N., R. 21 E., was surveyed by J. C. Brown, Forest Ranger, in 1913.

At cor. No. 1-HES No. 61, which is marked by a sandstone, 24x12x10 ins., firmly set, marked 1 HES 61 on side facing claim; witnessed by a mound of stone, to the SE.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground over broken glass and original rock mkd. with an X; original cor. stone buried on NW. side of post; brass cap mkd.




Corner is located about 15 ft. outside of claim fences, and on S. edge of track road.

At cor. No. 2-HES No. 61, which is mkd. by a sandstone, 24x12x4 ins., firmly set, mkd. 2 HES 61 on side facing claim; witnessed by a mound of stone, 3x2 ft. within claim, and 1 original bearing tree.

A yellow pine, 40 ins. diam., bears S. 64° E., 338 lks. dist. mkd. 2 HES 61 BT.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground to rock, with original cor. stone set along E. side of post, and supported in a mound of stone; brass cap mkd.



from which I mark

A red cedar, 6 ins. diam., bears N. 68° E., 80 lks. dist., mkd. X 2 HES 61 BT.

Corner is located about 15 lks. dist. NE. of cor. fences.

Remonumentation


Chains

At cor. No. 4-HES No. 61, which is marked by a sandstone, 38x20x5 ins., firmly set on bedrock in a mound of stone, mkd. 4 HES 61 on side facing claim; witnessed by 2 bearing trees.

- A yellow pine, 21 ins. diam., bears S. 2° W., 214 lks. dist.,
- A yellow pine, 42 ins. diam., bears S. 73° W., 237 lks. dist.
- Both mkd. 4 HES 61 BT.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., on bedrock, with original cor. set along S. side, supported in a mound of stone, 5 ft. base to top; brass cap mkd.



HES 61
4
1961

Corner is located on S. side of log fence.


H.E.S. No. 104

H. E. Survey No. 104, situated in unsurveyed sec. 25, T. 2 N., R. 21 E., was surveyed by W. B. Rice, Forest Examiner, in 1916.

At cor. No. 1-HES No. 104, which is mkd. by a sandstone, 20x8x7 ins. found buried 6 ins. below surface of ground, mkd. 1 HES 104 on side facing claim; no accessories.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 30 ins. in the ground, over broken glass, original cor. buried on E. side of post; brass cap mkd.



1
HES
104
1961

from which I mark

- A yellow pine, 25 ins. diam., bears S. 84° E., 411 lks. dist.
- A yellow pine, 23 ins. diam., bears N. 43° 06' E., 319 lks. dist.
- Both mkd. with X 1 HES 104 BT.

Place collar of rock around post.

Corner is located in meadow.

At cor. No. 2-HES No. 104, which is mkd. by a sandstone, 20x13x10 ins., firmly set, mkd. 2 HES 104 on SW. face; witnessed as follows:

- A yellow pine, 17 ins. diam., bears S. 66° 42' E., 167 lks. dist. mkd. X 2 HES 104 BT.
- A stump hole, with rotted trunk alongside, bears S. 17° W., 90 lks. dist., no marks remaining.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground to rock, over broken glass, with original cor. set along SW. side

Re monumentation of Corners on HES No. 104

Chains

of post, and in a mound of stone; brass cap mkd.

HES
104 2
1961

from which I mark

A yellow pine, 22 ins. diam., bears S. 4° E., 167 lks. dist.
mkd. X 2 HES 104 BT.

At cor. No. 3-HES No. 104, which is reestablished at its original position from the 2 original bearing trees. The corner is missing; from reestablished cor. point.

A yellow pine, 25 ins. diam., bears S. 58° 31' E., 190 lks. dist.

An aspen, 15 ins. diam., bears N. 86° 58' E., 220 lks. dist.
Both mkd. 3 HES 104 BT.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 26 ins. in the ground, over broken glass deposit; brass cap mkd.

HES
104
3
1961

Corner is located in small plowed area of meadow.

H.E.S. No. 60

H. E. Survey No. 60, situated in unsurveyed secs. 14 and 23, T. 2 N., R. 21 E., was surveyed by J. C. Brown, Forest Ranger, in 1913.

At cor. No. 1-HES No. 60, which is mkd. by a sandstone, 24x12x10 ins., firmly set, mkd. 1 HES 60 on SW. face; witnessed by a mound of stone, 3x2 ft., SW. of cor., and 1 original bearing tree.

A yellow pine, 16 ins. diam., bears N. 42° 20' E., 158 lks. dist. mkd. X 1 HES 60 BT.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground to bedrock, over broken glass, with original cor. stone set on SW. side of post; brass cap mkd.

HES
60
1
1961

Corner is located 3 lks. N. of cor. log fences bearing W. and SE.

At cor. No. 2-HES No. 60, which is marked by a sandstone, 24x15x4 ins., firmly set, mkd. 2 HES 60 on NW. face; witnessed by a mound of stone, 3x2 ft., to the NW.

Chains

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the to bedrock, over broken glass; original cor. set along NW. side of post; brass cap mkd.

| |
|------|
| HES |
| 60 |
| 2 |
| 1961 |

Corner is set under E-W pole fence, and at S. end of fence from N.

At cor. No. 3-HES No. 60, which is mkd. by a sandstone, 24x14x10 firmly set, mkd. 3 HES 60 on NE. face; witnessed by a mound of s to NE. and 1 bearing rock.

Sandstone outcrop in place, showing 4x3x2 ft., mkd. X 3 HES 60, bears S. $0^{\circ} 39'$ E., 271 lks. dist.

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the over broken glass, with original cor. stone buried on SE. side of post; brass cap mkd.

| |
|------|
| HES |
| 60 |
| 3 |
| 1961 |

Place collar of rock around cor.

Corner is located at corner of fences bearing with claim lines.

At cor. No. 4-HES No. 60, which is mkd. by a sandstone, 21x18x6 ins loosely set in a collar of rock, mkd. 4 HES 60 on side facing claim; witnessed by a mound of stone, E. 5 ft. dist.

At cor. point

Set an iron post, 1 in. diam., 26 ins. long, 10 ins. in the ground to bedrock and 5 ins. in a drill hole, cemented; original cor. s set on W. side of post; brass cap mkd.

| |
|------|
| 4 |
| HES |
| 60 |
| 1961 |

Raise a mound of stone around cor.

Corner is located on steep, rocky NW. slope.


At cor. No. 5-HES No. 60, which is mkd. by a sandstone, 24x16x6 ins., firmly set, mkd. 5 HES 60 on E. side; witnessed by a mound of stone, $4x2\frac{1}{2}$ ft., SE. 4 ft. dist.

At cor. point

Re-survey of Corners on HES, No. 60

Chains

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, over broken glass, with original cor. buried on E. side of post; brass cap mkd.



Place collar of rock around post.


Corner is located 8 ft. W. of small ditch, drains N. 30° E.

At cor. No. 6-HES No. 60, which is mkd. by a sandstone, 23x13x6 ins., firmly set, mkd. 6 HES 60 on SE. side; witnessed by a mound of stone 3x3 ft., SE. 8 ft. dist., and 1 original bearing tree.

A cedar, 9 ins. diam., bears N. 76° W., 45 lks. dist., mkd. X 6 HES BT 60.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground to bedrock, over rock 7x4x2 ins., mkd. X; original cor. set along NW. side of post; brass cap mkd.



Raise a mound of stone, 4 ft. base, around cor.

Corner is located on rocky NW. slope.

At cor. No. 7-HES No. 60, which is marked by a sandstone, 20x12x3 ins., firmly set, mkd. 7 HES 60 on SE. face; witnessed by a mound of stone, 4x2 ft., SE. 6 ft. dist., and 1 original bearing tree.

A yellow pine, 15 ins. diam., bears N. 15° 45' E., 281 lks. dist., mkd. X 7 HES 60 BT.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to bedrock, over broken glass and rock mkd. X; original cor. placed against SE. side of post; brass cap mkd.



1961

Raise a mound of stone, around post.

H.E.S. No. 65

H. E. Survey No. 65, situated in unsurveyed secs. 23, 24, 25, and 26, T. 2 N., R. 21 E., was surveyed by J. C. Brown, Forest Ranger, in 1913.

At cor. No. 1-HES No. 65, which is mkd. by a sandstone, 27x12x4.

Remonumentation of ~~C. S. S. S.~~ HES No. 65

Chains

ins., firmly set in the ground and in a mound of stone, marked 1 HES 65 on SW. face; witnessed by 2 original bearing trees.

A yellow pine, 18 ins. diam., bears S. $41^{\circ} 45'$ E., 180 lks. dist.

A yellow pine, 16 ins. diam., bears S. $65\frac{1}{2}^{\circ}$ E., 173 lks. dist.
Both mkd. 1 HES 65 BT.

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 8 ins. in the ground to bedrock, with original cor. set along S. side of post; brass cap mkd.

1
HES
65
1961

Raise a large mound of stone around cor.

Corner is located on steep, rocky W. slope.

At cor. No. 2-HES No. 65, which is mkd. by a sandstone, 16x15x7 ins., firmly set in a mound of stone, mkd. 2 HES 65 on NW. face; witnessed by the 2 original bearing trees..

A yellow pine, 24 ins. diam., bears N. $84\frac{1}{2}^{\circ}$ E., 118 lks. dist., (record dist. is 113 lks.)

A yellow pine, 26 ins. diam., bears N. 21° E., 156 lks. dist.

Both mkd. X 2 HES 65 BT.

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins. in the ground to bedrock, with original cor. stone placed along W. side of post, and supported in a large mound of stone to top; brass cap mkd.

HES
65
2
1961

At cor. No. 3-HES No. 65, which is mkd. by a sandstone, 26x18x12 ins., firmly set on bedrock and supported in a mound of stone; mkd. 3 HES 65 on NE. side; witnessed by the 2 original bearing trees

A yellow pine, 24 ins. diam., bears N. 87° E., 14 lks. dist.

A yellow pine, 26 ins. diam., bears N. $52\frac{1}{2}^{\circ}$ E., 73 lks. dist.

Both mkd. X 3 HES 65 BT.

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., on bedrock, with original cor. stone placed on NE. side of post, and supported in a large mound of stone to top; brass cap mkd.

HES
65
3
1961


Cor. is located 3 lks. SW. of cor. pole fences bearing about N., S. and E. A power pole, bears SW. 16 lks. dist., power line, bears E. about SW.

Re-remuneration of Corners on HES No. 65

Chains

At cor. No. 4-HES No. 65, which is mkd. by a sandstone, 35x16x4 ins., mkd. 4 HES 65, found lying on the ground at E. edge of small drain, and witnessed by a mound of stone, 3x3 ft., SE. 8 ft. dist. I uncover the original deposit, a rock, 5x4x2 ins. mkd. X, and reset original corner stone in its original position, supported in a large mound of stone. This point not deemed safe for permanent remuneration I establish a witness cor. at point on claim line, S. 88° 52' E., 22 lks. dist. from original cor., where I

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground with brass cap mkd.



Raise a mound of stone around post.

H.E.S. 66


H. E. Survey No. 66, situated in unsurveyed secs. 25 and 26, T. 2 N., R. 21 E., was surveyed by J. C. Brown, Forest Ranger, in 1913.

At cor. No. 1-HES No. 66, which is marked by a sandstone, 18x18x6 ins., loosely set in ground and in a small mound of stone, mkd. 1 HES 66 on SW. face; witnessed by the 2 original bearing trees.

A ponderosa pine, 31 ins. diam., bears S. 80° W., 479 lks. dist.
A ponderosa pine, 30 ins. diam., bears N. 85° W., 302 lks. dist.
Both mkd. X 1 HES 66 BT.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground to bedrock; with original cor. set along W. side of post; and supported in a large mound of stone to top; with brass cap mkd.



Cor. is located on E. side of cor. of fences bearing nearly S, W., and NW.

At cor. No. 2-HES No. 66, which is mkd. by a sandstone, 28x12x3 ins., mkd. 2 HES 66 on one face, and 5 HES 517 on cornering face, X on top (I destroy the X) found lying on the ground, under which I uncover the original deposit, a rock 7x4x3 ins. mkd. X; no accessories.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, over original deposit mkd. X and broken glass; original cor. buried on W. side of post; brass cap mkd.

Chains

HES

66

2

1961

from which I mark

A yellow pine, 9 ins. diam., bears N. 75° E., 170 lks. dist.

A yellow pine, 13 ins. diam., bears S. 3½° E., 272 lks. dist.

Both trees mkd. X 2 HES 66 BT.

And raise a mound of stone around cor.

Cor. is located on N. edge of a water ditch, 10 lks. wide, 3 ft. deep, drains NE., and on E. side of cor. fences along claim lines.

At cor. No. 3-HES No. 66, which is mkd. by a sandstone, 24x16x7 ins. firmly set, mkd. 3 HES 66 on NE. face; witnessed by the 2 original bearing trees.

A yellow pine, 27 ins. diam., bears S. 19½° E., 24 lks. dist.

A yellow pine, 26 ins. diam., bears S. 81° W., 124 lks. dist.

Marks overgrown on both trees.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, over broken glass, and original cor. buried on NE. side of post; brass cap mkd.

HES

66

3

1961

Cor. is located 5 lks. outside cor. of pole fences, bearing with claim lines.

At cor. No. 4-HES No. 66, which is marked by a sandstone, 26x24x6 ins., firmly set, mkd. 4 HES 66 on SE. face; witnessed by a mound of stone, 4x2 ft., E. of cor.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground with original cor. set on SE. side of post; brass cap mkd.

4

HES

66

1961

Corner is located 13 lks. N. of 2 wire power line, bears nearly E. and W., and in pole fence bearing N. 89° W. and S. 89° E.

H.E.S. No. 124

H. E. Survey No. 124, situated in unsurveyed secs. 32 and 33, T. 2 N., R. 21 E.; surveyed by Marshall S. Wright, Surveyor, Forest Service, in 1919.

Re-identification of Corners on HES NO. 124

Chains

At cor. No. 1-HES No. 124, which is mkd. by a sandstone, 22x20x10 ins., firmly set, mkd. 1 on SE. face (unable to identify any other mkd.) witnessed by 2 original bearing trees.

A yellow pine, 23 ins. diam., bears N. 64° W., 126 lks. dist. mkd. partially overgrown, visible HES 124 B.

A yellow pine, 25 ins. diam., bears N. 75° W., 222 lks. dist., mkd. X 1 HES 124 BT.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with original cor. buried on SE. side of post; brass cap mkd.

1
HES
124
1961

Raise a small mound of stone around cor.

At cor. No. 2-HES No. 124, which is mkd. by a red granite outcrop in place, showing, 10x15x3 ins. above ground, mkd. with a cross (x) and 2 HES 124 on top; witnessed by a small mound of stone to the SW.

At cor. point

Set a brass tablet, 3½ ins. in diam., 3½ ins. stem, cemented in drill hole mkd.

2
HES
124
1961

Cor. is located in worm fence, bearing S. with claim line, and northwesterly.

At cor. No. 3-HES No. 124, which is mkd. by a granite stone, 22x12x12 ins., firmly set, mkd. 3 HES 124 on NW. face and HES 216 on opposite side; witnessed by the 2 original bearing trees.

A yellow pine, 15 ins. diam., bears N. 27½° E., 22 lks. dist., marks overgrown.

A yellow pine, 27 ins. diam., bears N. 52½° E., 97 lks. dist., marks partially overgrown.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground with original cor. buried on SE. side of post; brass cap mkd.

HES
124 3
1961


Cor. is located about 15 lks. E. of worm fence.

Chains

At cor. No. 4-HES No. 124, which is mkd. by a granite stone, 28x12x6 ins., firmly set, mkd. 4 HES 124 on NE. face; witnessed by a small scattered mound of stone to NE.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground, over broken glass, with original cor. set on NE. side of post; brass cap mkd.



Raise a mound of stone around cor. and rebuild mound of stone, NE.

Cor. is located 7 ft. SW. of cor. fences, bearing with claim lines, and 6 ft. W. of small ditch draining N.

H.E.S. No. 128

H. E. Survey No. 128, situated in unsurveyed secs. 29 and 32, T. 2 N., R. 21 E., was surveyed by Marshall S. Wright, Surveyor, Forest Service, in 1921.

At cor. No. 1-HES No. 128, which is mkd. by a granite stone, 28x12x6 ins., firmly set, mkd. 1 HES 128 on side facing claim; witnessed by a mound of stone, 2x1 ft. in claim, and 2 original bearing trees.

- A yellow pine, 25 ins. diam., bears N. 36° W., 107 lks. dist.
- A yellow pine, 18 ins. diam., bears N. 73½° W., 77 lks. dist.
- Both mkd. X 1 HES 128 BT.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with original cor. set on SW. side of post; brass cap mkd.




Cor. is located at cor. of fences, parallel to claim lines.

At cor. No. 2-HES No. 128, which is mkd. by a granite stone, 24x12x7 ins., firmly set, mkd. 2 HES 128 on side facing claim; witnessed by 2 original bearing trees.

- A Douglas Fir, 25 ins. diam., bears S. 9° W., 67 lks. dist.
- A Douglas Fir, 24 ins. diam., bears N. 37½° W., 98 lks. dist.
- Marks on both trees are overgrown.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, over broken glass and rock mkd. X, with original cor. set on NW. side of post; brass cap mkd.



Remonumentation of Corners on HES No. 128

Chains


Cor. is located 2 ft. outside of cor. of pole fence, bearing with claim lines.

At cor. No. 3-HES No. 128, which is mkd. by granite outcrop in place, showing 5x4x1 ft. above ground, mkd. with a cross (X) with 3 HES 128 on top; witnessed by 2 original bearing trees.

A yellow pine, 19 ins. diam., bears N. 8 1/2° W., 97 lks. dist.
A yellow pine, 21 ins. diam., bears S. 35° W., 44 lks. dist.
Both mkd. X 3 HES 128 BT.

At cor. point

Set a brass tablet, 3 1/4 in. diam., 3 1/2 in. stem, cemented in a drill hole; mkd.



Cor. is located 7 ft. W. of pole fence.


At cor. No. 4-HES No. 128, which is mkd. by a granite stone, 19x11x9 ins., firmly set, mkd. 4 HES 128 on S. side, and X on top (I destroy the X) witnessed by 1 original bearing tree.

A yellow pine, 25 ins. diam., bears S. 51 1/4° E., 113 lks. dist., mkd. X 4 HES 128 BT.

There is no remaining evidence of the other original bearing tree.

At cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 14 ins. in the ground to rock, over broken glass, with original cor. set on SW. side of post; brass cap mkd.



Raise a mound of stone around post.

U.S.L.M. No. 255

Remonumentation of U.S. Location Monument No. 255, in unsurveyed sec. 29, T. 2 N., R. 21 E., was established in connection with the survey of H.E.S. No. 124, by Marshall S. Wright, Surveyor, F.S., in 1919. The point is mkd. by a cross (X) with USIM 255 chiseled in flat surface of red granite ledge in place, showing 8x8x3 ft. above ground; witnessed by a mound of stone, 6x4 ft., 4 ft. NE. of cross, and 2 remaining original bearing trees.

A yellow pine, 15 ins. diam., bears S. 65° 45' W., 156 lks. dist.
A yellow pine, 13 ins. diam., bears N. 15 1/2° W., 126 lks. dist.
Both mkd. USIM 255 BT.

The other bearing tree has fallen and been destroyed by fire.

Chains

At cor. point

Set an iron post, 1 in. diam., 16 ins. long, cemented in a drill hole 11 ins. deep; mkd.

USLM



255

1961

Monument is 10 ft. W. of the E. edge of abrupt rimrock cliff.

The record tie from cor. No. 1_HES No. 124 is N. 30° 10' W., 26.36 dist.

U.S.L.M. No. 258

Remonumentation of U.S. Location Monument No. 258, in unsurveyed sec. 24, T. 2 N., R. 21 E.; established by W. B. Rice, Forest Examiner, in 1915. The point is mkd. by a cross (X) with USLM 258 chiseled into top of sandstone boulder in place, showing 5x4x1 ft. above ground; witnessed by a mound of stone, 5x3 ft., N. 8 ft. dist. and 2 bearing rocks as follows:

A flat granite rock in place, showing 12x6x1 ft., mkd. X USLM 258 BR., bears N. 59½° W., 26 lks. dist.

A granite rock in place, showing 15x10x1 ft., mkd. X USLM 258 BR., bears S. 39° W., 26 lks. dist.

At cor. point

Set a brass tablet, 3¼ in. diam., 3½ in. stem, cemented in drill hole; mkd.

USLM



258

1961

Record tie to Cor. 1-HES No. 61, is N. 66° 10' E., 9.83 chs. dist.

Re monumentation of Corners in T. 3 N., R. 22 E.

Chains

The South and West Boundaries, and the Subdivisional lines of T. 3 N., R. 22 E., Salt Lake Meridian, Utah, were surveyed by S. P. and J. R. Stewart in 1906.

The following field notes are those of the remonumentation of certain identified original corners in T. 3 N., R. 22 E., Salt Lake Meridian, Utah. The position of each cor. was mkd. by the original monument, or determined from cor. accessories recorded in the original survey record.

The cors. remonumented were selected by the U.S. Forest Service as being adjacent to, or controlling the boundaries of Forest Service Lands. The remonumentation was requested by and accomplished in cooperation with the Forest Service.

S. Bdy. T. 3 N., R. 22 E.

At the cor. of secs. 4, 5, 32 and 33, on S. bdy. of Tp., which is mkd. by a sandstone, 22x8x6 ins., firmly set, mkd. with 4 notches on E. and 2 notches on W. edge; witnessed by few scattered rock, and 4 bearing trees as follows:

A pinon, 10 ins. diam., bears N. $79\frac{1}{2}^{\circ}$ E., 123 lks. dist.; properly mkd. (record is N. $74^{\circ} 35'$ E., 68 lks. dist.)

A pinon, 8 ins. diam., bears S. $61\frac{1}{2}^{\circ}$ E., 338 lks. dist., marks nearly overgrown, S4 is visible (record is S $56^{\circ} 20'$ E., 193 lks.)

Base of dead fallen pinon, 7 ins. diam., properly mkd., bears S. 2° E., 99 lks. dist. (record is S. $34^{\circ} 50'$ W., 120 lks.)

A pinon, 8 ins. diam., bears N. $42\frac{1}{2}^{\circ}$ W., 91 lks. dist., mkd. T3NR22ES34BT (record is N. $62\frac{1}{2}^{\circ}$ W., 135 lks. dist.)

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with original cor. stone buried on N. side of post, and in a collar of stone; brass cap mkd.

| | |
|------|------|
| T3N | R22E |
| S32 | S33 |
| S5 | S4 |
| T2N | |
| 1961 | |

Cor. is located on a NE. slope.

At the $\frac{1}{4}$ sec. cor. of secs. 5 and 32, which is mkd. by a sandstone 17x12x6 ins., firmly set, mkd. $\frac{1}{4}$ on N. face; witnessed by 2 bearing trees.

A pinon, 7 ins. diam., bears N. 51° E., 31 lks. dist., mkd. $\frac{1}{4}$ S32 BT.

A pinon, 8 ins. diam., bears S. 42° W., 13 lks. dist., marks overgrown.

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground with original cor. stone buried alongside; brass cap mkd.

| | |
|---------------|-----|
| T3NR22E | |
| $\frac{1}{4}$ | S32 |
| S5 | |
| 1961 | |

Chains

Cor. is located on top of low rise in dense timber, about 1 ch. dist. S. of draw bottom, drains W.

At the cor. of secs. 5, 6, 31 and 32 on S. bdy. of Tp., which is mkd. by a sandstone, 18x8x7 ins., firmly set; mkd. with 5 notches on E. and 1 notch on W. edge; witnessed by 4 original bearing trees.

A pinon, 7 ins. diam., bears N. $74\frac{1}{2}^{\circ}$ E., 31 lks. dist., properly mkd.

A pinon, 14 ins. diam., bears S. 18° E., 77 lks. dist., properly mkd.

A juniper, 16 ins. diam., bears S. 34° W., 56 lks. dist., properly mkd.

A juniper, 12 ins. diam., bears N. $64\frac{1}{4}^{\circ}$ W., 25 lks. dist., mkd. 3 N 22E S31 BT.

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 4 ins. in the ground to solid rock; original stone at base, supported in a large mound of stone to top; brass cap mkd.

| | |
|------|------|
| T3N | R22E |
| S31 | S32 |
| S6 | S5 |
| T2N | |
| 1961 | |

Corner is located on steep SE. slope in dense timber, at the SW. base of a 20-ft. high outcrop.

At the cor. of Tps. 2 and 3 N., Rs. 21 and 22 E., which is mkd. by a red sandstone, 18x11x6 ins., mkd. with 6 notches on all 4 sides, witnessed by the 4 original bearing trees.

A juniper, 8 ins. diam., bears N. $81\frac{1}{2}^{\circ}$ W., 75 lks. dist., properly mkd.

A dead juniper, 10 ins. diam., bears N. $60^{\circ} 40'$ E., 27 lks. dist., properly mkd.

A dead juniper, 10 ins. diam., bears S. $53\frac{1}{2}^{\circ}$ E., 42 lks. dist., properly mkd.

A juniper, 8 ins. diam., bears S. $57\frac{1}{4}^{\circ}$ W., 84 lks. dist., properly mkd.

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 16 ins. in the ground to bedrock, original stone at base, and supported in a mound of stone to top; brass cap mkd.

| | |
|------|------|
| T3N | |
| R21E | R22E |
| S36 | S31 |
| S 1 | S 6 |
| T2N | |
| 1961 | |

from which I mark

A juniper, 14 ins. diam., bears N. $22\frac{1}{2}^{\circ}$ E., 82 lks. dist., mkd. T3N R22E S31 BT.

Re monumentation of Corners in T. 3 N., R. 22 E.

Chains

A juniper, 12 ins. diam., bears S. 71° E., 81 lks. dist.,
mkd. T2N R22E S6 BT.

Cor. is located on a gentle SW. slope, about 1 ch. W. of shallow
saddle in top of spur, slopes SE., and in medium dense timber.

W. Bdy., T. 3 N., R. 22 E.

At the $\frac{1}{4}$ sec. cor. of secs. 31 and 36, on W. bdy. of Tp., which is
marked by a sandstone, 18x16x8 ins., firmly set, mkd. $\frac{1}{4}$ on W. face;
witnessed by 2 original bearing trees.

A juniper, 6 ins. diam., bears S. 72° E., 46 lks. dist.,
mkd. $\frac{1}{4}$ S31 BT.

A pinon, 8 ins. diam., bears S. 73° W., 40 lks. dist., mkd.
 $\frac{1}{4}$ S36 BT.

At cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 16 ins. in the ground
to rock, original cor. stone set at base, and supported in a
mound of stone to top; brass cap mkd.

T3N
R21E $\frac{1}{4}$ R22E
S36 | S31
1961

Corner is located on gentle NW. slope, about 1 $\frac{1}{2}$ chs. E. of small
draw draining S. 20° W.

At the $\frac{1}{4}$ sec. cor. of secs. 25 and 30, on W. bdy. of Tp., which is
mkd. by a limestone, 18x10x8 ins., firmly set, mkd. $\frac{1}{4}$ on W. face;
unwitnessed.

At cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground,
with original cor. stone buried at base of post; brass cap mkd.

T3N
R21E $\frac{1}{4}$ R22E
S25 | S30
1961

Deposit broken glass at base of post, and raise a small mound of
stone around post.

Cor. is located on a gentle SW. slope in open desert country, a long
spur sloping N. bears E. of cor. about 4 chs. dist.

Chains

of Corners in T. 3 N. R. 22 E.

Subs. T. 3 N., R. 22 E.

At the $\frac{1}{4}$ sec. cor. of secs. 32 and 33, which is mkd. by a sandstone 24x12x7 ins. mkd. $\frac{1}{4}$, found lying in center of small mound of stone; witnessed by 2 original bearing trees.

A pinon, 16 ins. diam., bears S. $64\frac{1}{2}^{\circ}$ E., 38 lks. dist., mkd. $\frac{1}{4}$ S33 BT.

A pinon, 14 ins. diam., bears S. $9\frac{1}{2}^{\circ}$ W., 70 lks. dist., mkd. $\frac{1}{4}$ S32 BT.

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground to rock, with original cor. stone set alongside of post; brass cap mkd.

T3N R22E

$\frac{1}{4}$

S32 | S33

1961

Place collar of rock around post.

Cor. is located on a steep, rocky and ledgy S. slope, in medium dense timber.

At the $\frac{1}{4}$ sec. cor. of secs. 28 and 33, which is mkd. by a sandstone, 14x12x8 ins., mkd. $\frac{1}{4}$ on N. face, set in a small mound of stone on top of sandstone bedrock; witnessed by 2 original bearing trees.

A juniper, 5 ins. diam., bears S. $75\frac{1}{2}^{\circ}$ W., 96 lks. dist., mkd. $\frac{1}{4}$ S33 BT.

A juniper, 5 ins. diam., bears N. $81\frac{1}{2}^{\circ}$ W., 117 lks. dist., mkd. $\frac{1}{4}$ S28 BT.

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 4 ins. into solid rock, original cor. stone set at base, and supported in a large mound of stone to top; brass cap mkd.

T3NR22E

$\frac{1}{4}$ S28

S33

1961

Cor. is located on a gentle S. slope, at E. edge of scattered junipers.

At the $\frac{1}{4}$ sec. cor. of secs. 28 and 29, which is mkd. by a sandstone, 14x12x3 ins., firmly set in deeply embedded mound of stone, mkd. $\frac{1}{4}$ on W. face; witnessed by a mound of stone, $2x1\frac{1}{2}$ ft. W. of cor.

At. cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, original cor. stone buried at base of post; brass cap mkd.

Chains




Cor. is located on medium steep NE. slope; about 1½ chs. N. of N. edge bench top, in open desert country.

At the ¼ sec. cor. of secs. 31 and 32, which is mkd. by a sandstone, 21x14x6 ins., mkd. ¼, and lying in a small mound of stone; witnessed by 2 original bearing trees.

- A juniper 10 ins., bears S. 76° E., 21 lks. dist., mkd. ¼ S32 BT.
- A pinon, 10 ins. diam., bears N. 46° W., 32½ lks. dist., mkd. ¼ S31 BT.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam.; 8 ins. in ground to bedrock, original cor. stone set at base of post, and supported in a large mound of stone to top; brass cap mkd.




Cor. is located on steep SW. slope at S. base of ledges, and about 1 ch. N. of small draw draining SE.

At the cor. of secs. 29, 30, 31 and 32, which is mkd. by a quartzite stone, 18x12x6 ins., mkd. with 1 notch on S. and 5 notches on E. edge, loosely set in a small mound of stone; no other accessories. A cedar post with F. S. marker is set on W. side of stone.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, original cor. buried alongside of post; brass cap mkd.



Raise a small mound of stone around post.

At the ¼ sec. cor. of secs. 29 and 32, which is mkd. by a sandstone, 18x10x3 ins., firmly set, mkd. ¼ on N. face; unwitnessed.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with original cor. stone buried at base of post; brass cap mkd.

Location of Corners in T. 3 N., R. 22 E.

Chains

T3NR22E
 $\frac{1}{4}$ S29
 S32
 1961

from which I mark

A juniper, 5 ins. diam., bears N. 38° W., 91 lks. dist.
 mkd. $\frac{1}{4}$ S BT.

Raise a small mound of stone around post.

Cor. is located on a gradual NE. slope, in scattered small timber.

At the $\frac{1}{4}$ sec. cor. of secs. 30 and 31, which is mkd. by a sandstone,
 22x14x8 ins., mkd. $\frac{1}{4}$ on N. face, loosely set in a small mound of
 stone; witnessed by 2 bearing trees.

A juniper, 5 ins. diam., bears N. 24° E., 46 lks. dist.,
 mkd. $\frac{1}{4}$ S30 BT.

A pinon, 9 ins. diam., bears S. 11 $\frac{1}{2}$ ° E., 34 lks. dist.,
 mkd. $\frac{1}{4}$ S31 BT.

At cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground,
 with original cor. buried on N. side of post; brass cap mkd.

T3NR22E
 $\frac{1}{4}$ S30
 S31
 1961

Place collar of rock around post.

Cor. is located on steep, rocky NE. slope in medium dense timber,
 about 1 $\frac{1}{2}$ chs. W. of draw, draining N., and about 8 chs. S. of Oiled
 Highway between Linwood and Flaming Gorge Dam.

Remonumentation of Corner in T. 2 N., R. 23 E.

Chains

The following field notes are those of the remonumentation of certain identified corners in T. 2 N., R. 23 E., Salt Lake Meridian, Utah. The original survey of which was executed by S. P. and J. R. Stewart, Deputy Surveyors, in 1906. The position of each corner was mkd. by the original monument.

The corners remonumented were selected by the Forest Service as being adjacent to, or controlling the boundaries of Forest Service Lands. The remonumentation was requested by and accomplished in cooperation with the Forest Service.

T. 2 N., R. 23 E.

At the $\frac{1}{4}$ sec. cor. of secs. 9 and 16, which is mkd. by a sandstone, 16x10x7 ins., mkd. $\frac{1}{4}$ on N. face, loosely set in a collar of rock; witnessed by 1 bearing tree.

A pinon, 14 ins. diam., bears N. 23° E., 46 lks. dist., mkd. $\frac{1}{4}$ S9 BT. (Record is N. 22° E., 45 lks.)

There is no remaining evidence of the original bearing tree in sec. 16.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground with original cor. buried alongside of post; brass cap mkd.

T2NR23E
 $\frac{1}{4}$ — $\frac{S9}{S16}$
1961

from which I mark

A juniper 8 ins. diam., bears S. 46° E., 42 lks. dist., mkd. $\frac{1}{4}$ S16 BT.

And raise a large mound of stone around post.

Corner is located on a SE. slope, about 10 ft. N. of N. edge of new road under construction, bearing NW. and SE.

Chains

T. 3 S., R. 19 E., Salt Lake Meridian, Utah, was surveyed by Ferron and Buettner, D.S., in 1879. The following field notes are those of the remonumentation of two corners on the W. boundary of same, which is also along the bdy. of the Ashley National Forest.

The identified original corners were mkd. by the original monuments and were selected by the Forest Service as being adjacent to, or controlling the boundaries of Forest Service Lands. The remonumentation was requested by and accomplished in cooperation with the Forest Service.

W. Bdy. T. 3 S., R. 19 E.

At the cor. of secs. 7, 12, 13 and 18, on the W. bdy. of Tp., which is mkd. by a quartzite stone, 18x10x8 ins., firmly set, mkd. with 2 notches on N. and 4 Notches on S. edge; witnessed by a small scattered mound of stone around cor.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground, with original cor. buried on W. side of post; brass cap mkd.

| | |
|------|------|
| T3S | |
| R18E | R19E |
| S12 | S 7 |
| S13 | S18 |
| 1961 | |

Raise a mound of stone around post.

Cor. is located in 5 strand barbed wire fence, bears N. and S., and 40 lks. N. of top of ridge, bears NW. and SE.

At the ¼ sec. cor. of secs. 13 and 18, on W. bdy., which is mkd. by a granite stone, 17x12x6 ins., firmly set, mkd. ¼ on W. face; witnessed by a small scattered mound of stone around cor.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground to rock, with original cor. buried on E. side of post; brass cap mkd.

| | |
|--------|------|
| T3S | |
| R18E ¼ | R19E |
| S13 | S18 |
| 1961 | |

Raise a mound of stone around post.

Cor. is located on slight W. slope, E. 47 lks. dist. of N-S wire fence.

CERTIFICATE OF CADASTRAL ENGINEER

I, Andrew Nelson, HEREBY CERTIFY upon honor that, in accordance of special instructions bearing date of the 15th day of February, 1961, I have ~~surveyed~~ remonumented U.S.L.M. No. 270 and corners on H.E.S. Nos. 62, 64, 105, 129 and 130 located in T. 2 N., R. 22 E., and U.S.L.M. Nos. 255 and 258 and corners on H.E.S., Nos. 60, 61, 65, 66, 124 and 128 located in unsurveyed portion of T. 2 N., R. 21 E. and remonumentation of corners in T. 3 N., R. 22 E., T. 2 N., R. 23 E. and T. 3 S., R. 19 E.

of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by me and under my direction; and that a survey has been made in strict conformity with said instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in the specific manner described in the foregoing field notes.

Salt Lake City, Utah
June 22, 1962

Andrew Nelson
Andrew Nelson - Cadastral Surveyor

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT,
Washington, D. C., MAY 1 1963, 19.....

The foregoing field notes of the ~~survey of~~ remonumentation of U.S.L.M. No. 270 and corner on H.E.S. Nos. 62, 64, 105, 129 and 130 located in T. 2 N., R. 22 E. and U.S.L.M. No. 255 and 258 and corners on H.E.S., Nos. 60, 61, 65, 66, 124 and 128 located in unaurveyed portion of T. 2 N., R. 21 E. and remonumentation of corners in T. 3 N., R. 22 T. 2 N., R. 23 E., and T. 3 S., R. 19 E., Salt Lake Meridian, Utah. executed by Andrew Nelson

having been critically examined and found correct, are hereby approved.

Clifford L. ...
Chief, Division of Engineering

CERTIFICATE OF TRANSCRIPT

I CERTIFY that the foregoing transcript of the field notes of the above-described surveys in ... is a true copy of the original field notes.

Cadastral Engineering Staff Officer.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

ORIGINAL

FIELD NOTES

OF THE

REMONUMENTATION OF CORNERS IN

TOWNSHIP 20 SOUTH, RANGE 2 WEST

TOWNSHIP 22 SOUTH, RANGE 3 WEST

TOWNSHIP 24 SOUTH, RANGE 1 EAST

TOWNSHIP 26 SOUTH, RANGE 2 EAST

TOWNSHIP 26 SOUTH, RANGE 3 EAST

TOWNSHIP 27 SOUTH, RANGE 2 WEST

Of the **SALT LAKE** Meridian,

the State of **UTAH**

EXECUTED BY

Andrew Nelson, Cadastral Surveyor

Under special instructions dated **February 15**, 19**61**, which provided

for the surveys included under Group No. **447**, approved **February 16, 1961**

assignment instructions dated **April 27**, 19**61**

Survey commenced **June 13**, 19**61**

Survey completed **June 22**, 19**61**


INDEX DIAGRAM

Township, Range

| | | | | | |
|----|----|----|----|----|----|
| 6 | 5 | 4 | 3 | 2 | 1 |
| 7 | 8 | 9 | 10 | 11 | 12 |
| 13 | 17 | 16 | 15 | 14 | 18 |
| 19 | 20 | 21 | 22 | 23 | 24 |
| 29 | 28 | 28 | 27 | 26 | 25 |
| 31 | 32 | 33 | 34 | 35 | 36 |

CORNER REMONUMENTATION INDEX DIAGRAM


Township 20 South, Range 2 West, Salt Lake Meridian

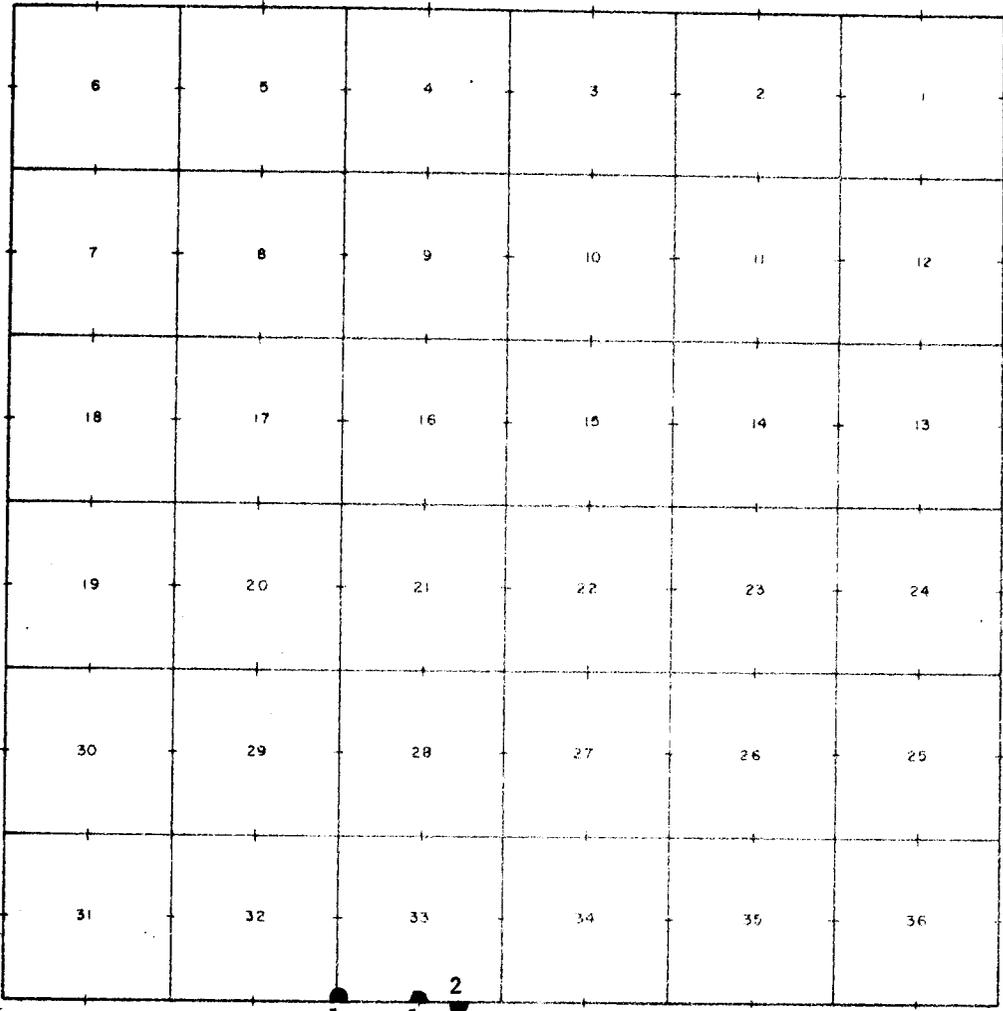

1 1 2
R.2 $\frac{1}{2}$ W. R2W


CORNER REMONUMENTATION INDEX DIAGRAM

Township 22 South, Range 3 West, Salt Lake Meridian

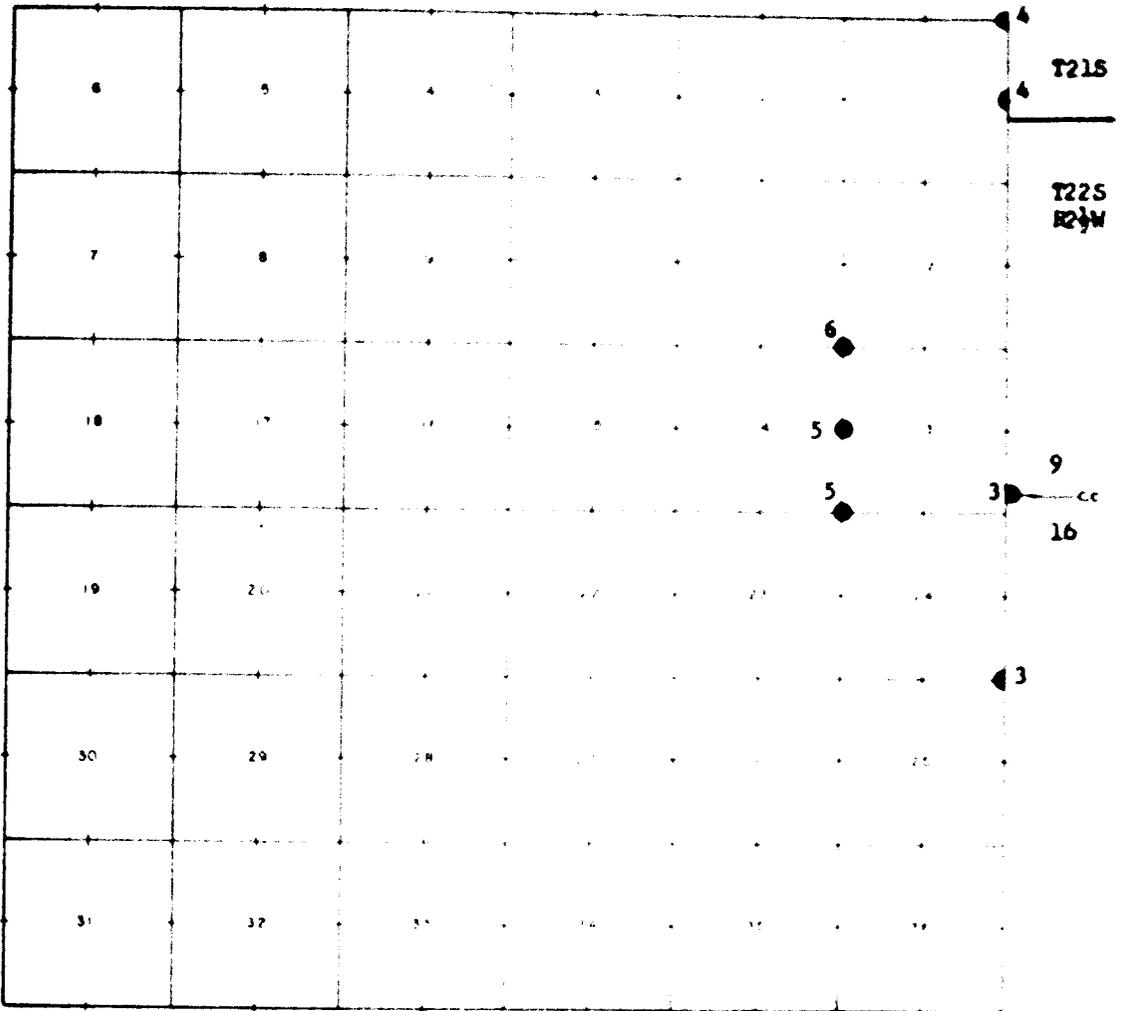


CORNER REMONUMENTATION INDEX DIAGRAM

Township 24 South, Range 1 East, Salt Lake Meridian

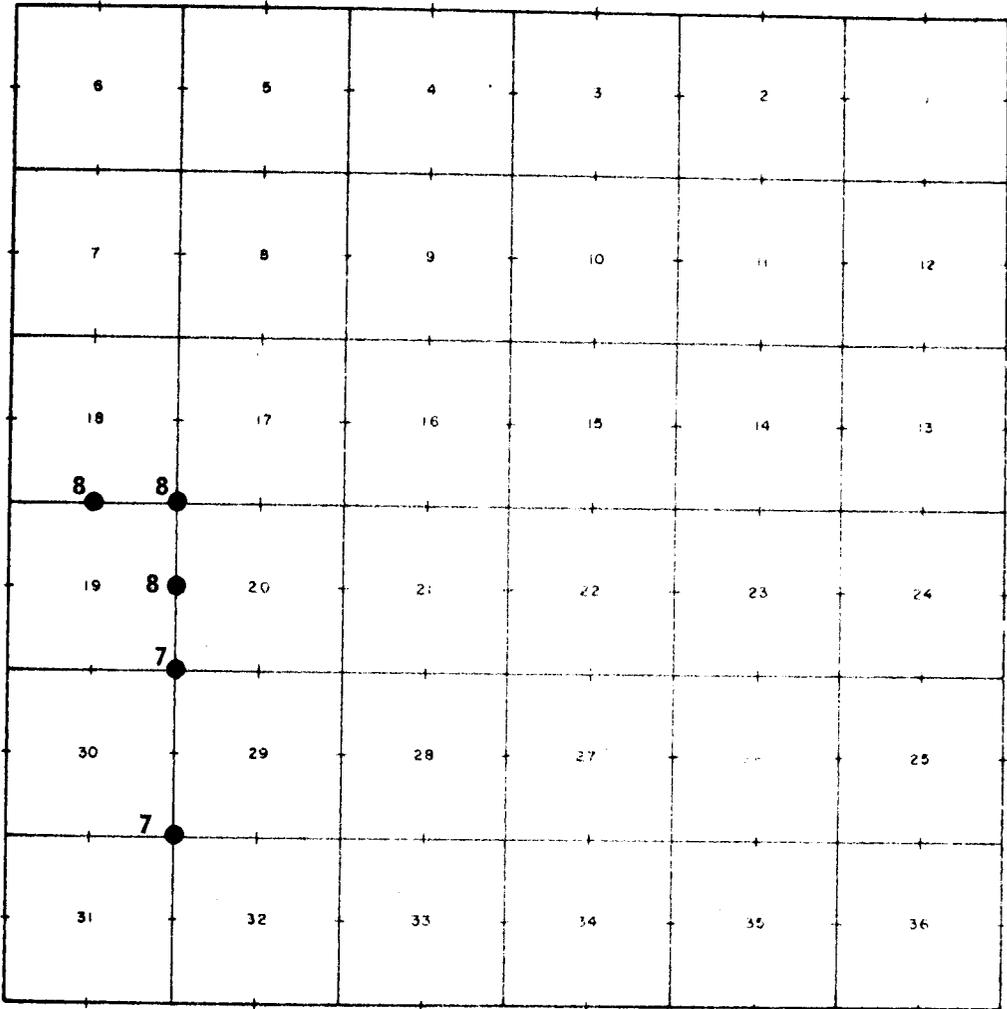


CORNER REMONUMENTATION INDEX DIAGRAM

Township 26 South, Range 2 East, Salt Lake Meridian

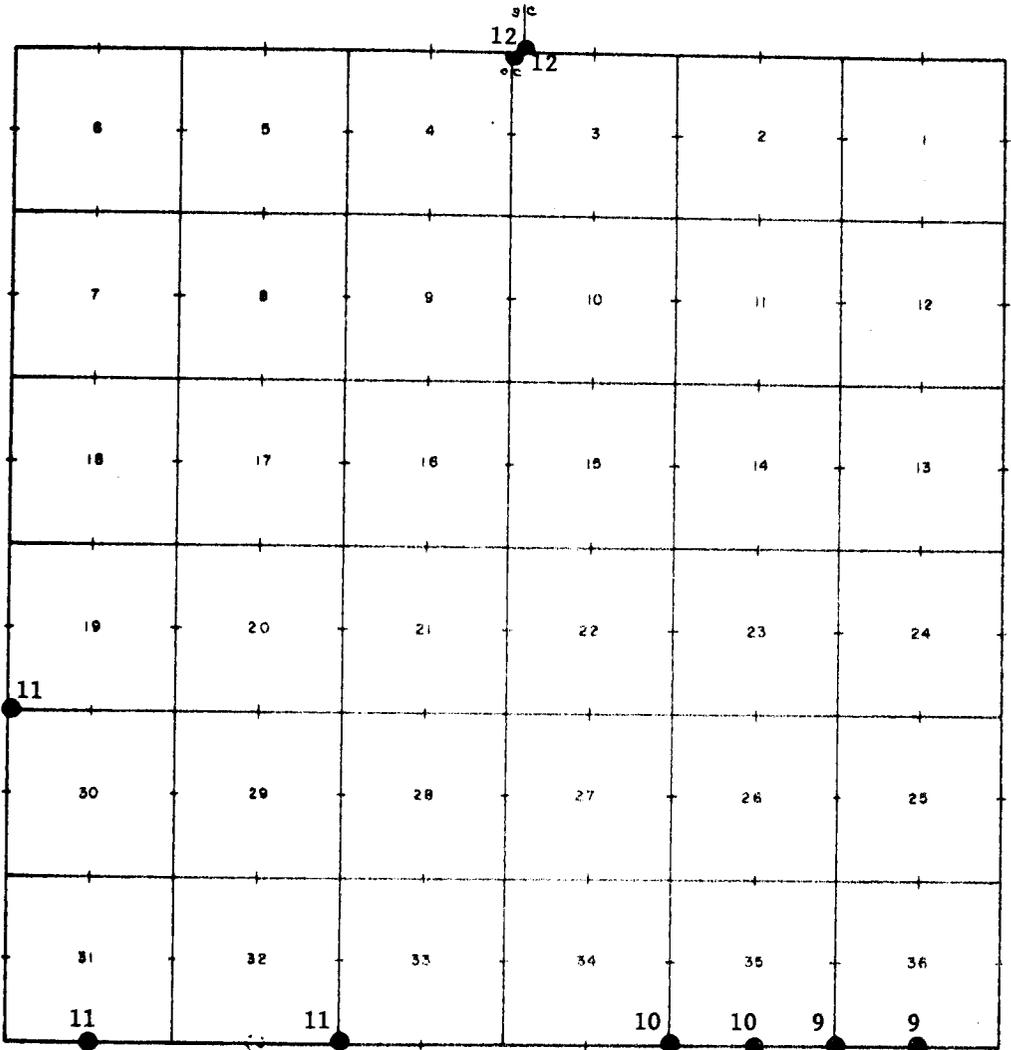


CORNER REMONUMENTATION
INDEX DIAGRAM

Township 26 South, Range 3 East, Salt Lake Meridian

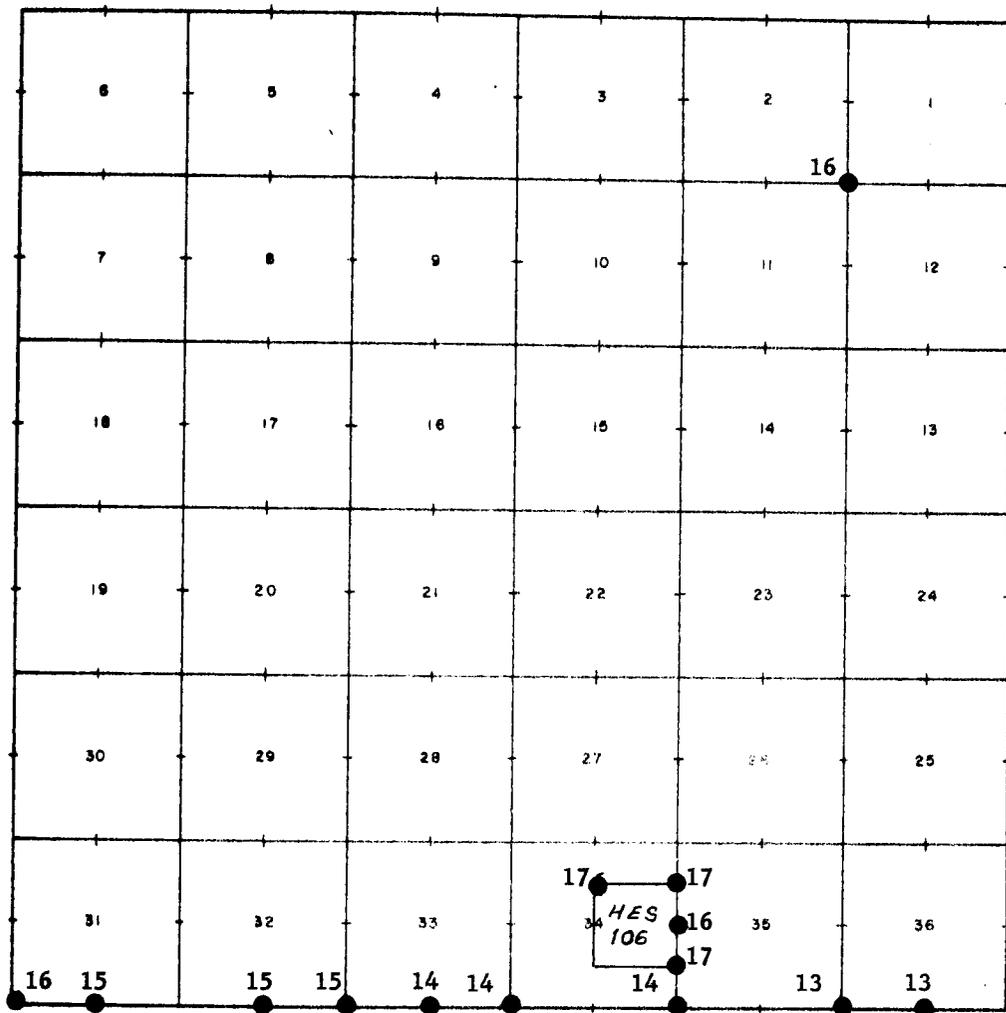

CORNER REMONUMENTATION
INDEX DIAGRAM

Township 27 South, Range 2 West, Salt Lake Meridian

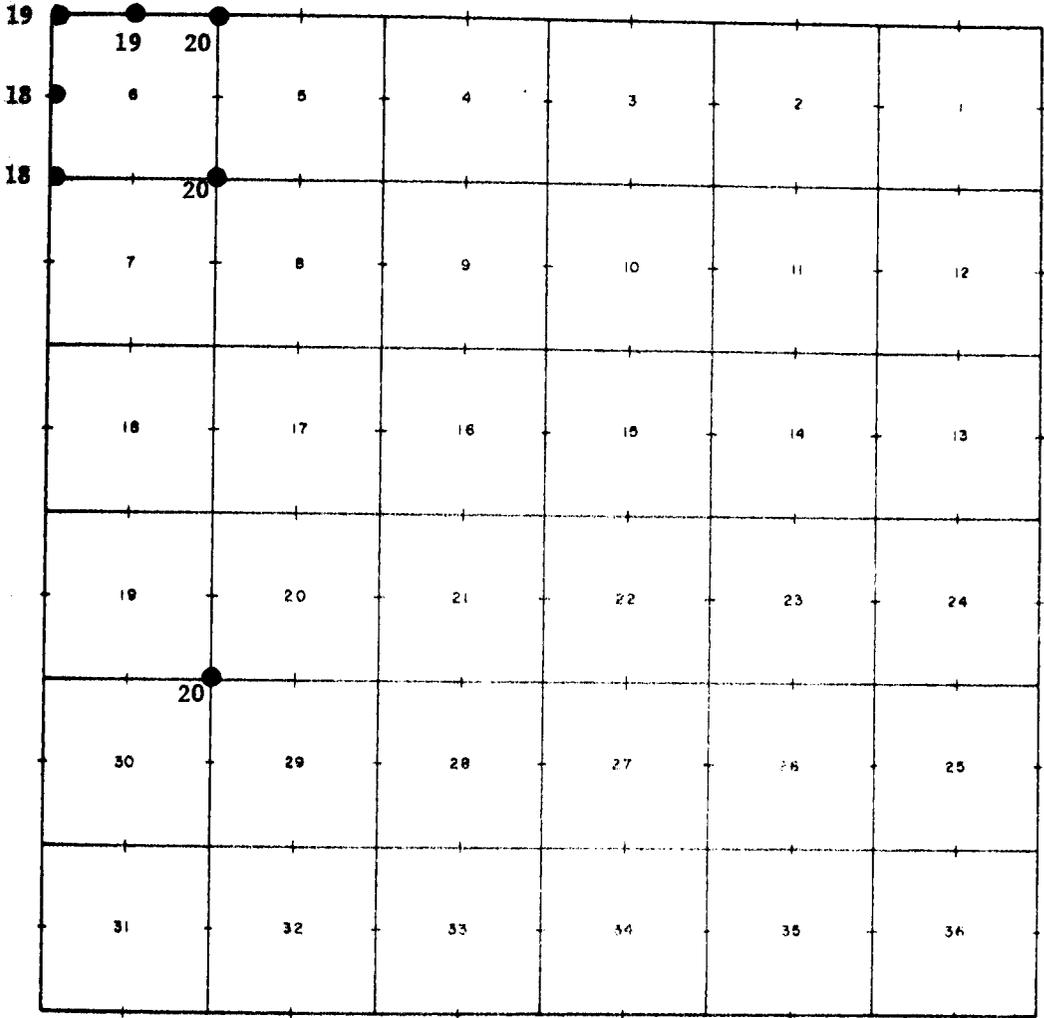

Chains

of 1882, in T. 20 S., R. 2 W.

The following field notes are those of the remonumentation of two corners on the 4th standard parallel south, (S. bdy. T. 20 S., R. 2 W.) and the closing cor. of Tps. 21 S., Rs. 2 and 3 W., Salt Lake Meridian, Utah. Original surveys executed by Henry Fitzhugh, D.S., in 1882. The identified original corners were mkd. by the original monuments. The corners remonumented were selected by the Forest Service as being adjacent to, or controlling the boundaries of Forest Service Lands. The monumentation was requested by and accomplished in cooperation with the Forest Service.

T. 20 S., R. 2 W.

At the standard $\frac{1}{4}$ sec. cor. of sec. 33, on S. bdy. of Tp., which is mkd. by a sandstone, 16x10x9 ins., firmly set, mkd. $\frac{1}{4}$ on N. face; witnessed by a small mound of stone, N. of cor.

At cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with original cor. buried on S. side of post; brass cap mkd.

| |
|--------------------------|
| SC |
| T20S R2W |
| $\frac{1}{4}$ <u>S33</u> |
| 1961 |

Place collar of rock around post, and rebuild mound of stone, N. of cor.

Cor. is located 6 lks. N. of E-W wire fence, in oak brush and at top of a 25 ft. steep ascent facing E. Road to Maple Grove, bearing E. and SW. is S. of cor. about $\frac{1}{2}$ ch. dist.

At the S.C. of secs. 32 and 33, on S. bdy. of Tp., which is mkd. by a sandstone, 16x9x7 ins., loosely set, mkd. 4 notches on E., and only 1 notch on W. edge; witnessed by few scattered rock.

At cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, original cor. buried on W. side of post; brass cap mkd.

| |
|------------------|
| SC |
| T20S R2W |
| <u>S32 S33</u> |
| 1961 |

Raise a mound of stone, around cor.

Cor. is located in N-S wire fence, on gentle N. slope, in sage brush and scattered clumps of oak brush. Maple Grove camp ground bears S. about $\frac{1}{4}$ mile dist.

At the closing cor. of Tps. 21 S., Rs. 2 and 3 W., on the 4th Standard Parallel South and S. bdy. sec. 33, which is mkd. by a sandstone, 16x12x10 ins., firmly set, mkd. 6 notches on E. and W., and 6 notches and CC on S. side; witnessed by few scattered rock around cor.

Remonumentation of Corners in T. 20 S., R. 2 W.

Chains

At cor. point -
Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground with original cor. buried alongside of post; brass cap mtd.

T20S R2W
S33
S 1 S 6
R2W R2W
T21S
1961

Raise a mound of stone around cor.

Cor. is located in wire fence bearing E. and W., and in line with fence to the S. Road to Maple Grove is S. of cor. 35 lks. dist., at bend bears N. and W.

Chains

of Corners in T. 22 S. R. 3 W.

The survey of a portion of the W. and N. boundaries, and a portion of the subdivisions of T. 22 S., R. 3 W., Salt Lake Meridian, Utah, were executed by A. J. Stewart, Jr., in 1874. All of the remaining boundaries and subdivisions were surveyed by John T. Breckon, in 1896.

The following field notes are those of the remonumentation of certain identified original corners of the Breckon, 1896 survey in T. 22 S., R. 3 W. The position of each corner was mkd. by the original monument or determined from corner accessories as recorded in original survey record.

The corners remonumented were selected by the Forest Service as being adjacent to, or controlling the boundaries of Forest Service Lands. The monumentation was requested by and accomplished in cooperation with the Forest Service.

T. 22 S., R. 3 W.

At the cor. of secs. 24 and 25, on E. bdy. of Tp., which is mkd. by a sandstone, 17x8x6 ins., broken in 2 pieces, lower portion firmly set in ground, top part mkd. with 4 notches on one edge, no other marks identified; witnessed by 1 original bearing tree.

A yellow pine, 34 ins. diam., bears N. $59\frac{1}{2}^{\circ}$ W., 50 lks. dist., marks nearly overgrown, visible 24 BT.

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, original cor. buried on E. side of post; brass cap mkd.

| | |
|------|--------------------|
| T22S | R2 $\frac{1}{2}$ W |
| S24 | S21 |
| S25 | |
| R3W | |
| | 1961 |

from which I mark

A red cedar, 14 ins. diam., bears S. 41° W., $54\frac{1}{2}$ lks. dist., mkd. T22S R3W S25 BT.

And raise a mound of stone, around cor.

Cor. is located on a medium steep S. slope, $\frac{1}{2}$ ch. S. of top of ascent on small knoll, in medium dense timber.

At the closing cor. of secs. 9 and 16; on W. bdy. of T. 22 S., R. 2 $\frac{1}{2}$ W., which is mkd. by a limestone, 16x10x6 ins., firmly set, mkd. 4 notches on S., 2 notches on N., and CC on E. side; witnessed by few scattered rock around cor.

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, original cor. buried on E. side of post; brass cap mkd.

| | | |
|-----|--------------------|------|
| R3W | T22S | |
| S13 | S 9 | CC |
| | S16 | |
| | R2 $\frac{1}{2}$ W | |
| | | 1961 |

Remonumentation of Corners in T. 22 S., R. 3 W.

Chains

from which I mark

An Alpine Fir, 14 ins. diam., bears N. 78° E., 109 lks. dist., mkd. CG T22S R2W S9 BT.

An Alpine Fir, 14 ins. diam., bears S. 71° E., 64½ lks. dist., mkd. S16 BT.

Corner is located on steep SE. slope, 15 lks. N. of ravine, draining NE., in scattered fir, mahogany and manzanita.

At the ¼ sec. cor. of sec. 1, on E. bdy. of Tp., which is mkd. by a sandstone, 11x9x6 ins., firmly set, mkd. ¼ on W. face; witnessed by a small mound of stone, W. of cor.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground with original cor. buried on W. side of post; brass cap mkd.

¼
S1
T22S
R3W
1961

Raise a mound of stone, around post.

Corner is located on medium steep SW. slope, in dense tall sagebrush about 4 chs. E. of draw, near head, drains S.

At the cor. of Tps. 21 and 22 S., R. 3 W., which is mkd. by a sandstone, 17x12x7 ins., firmly set, mkd. with 6 notches on N., S. and W. edges, and 21S on NW. and 3W on SW. face; witnessed by a small mound of stone, W. of cor.

At corner point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground with original cor. buried on W. side of post; brass cap mkd.

T21S
R3W
S36
S 1
T22S
R3W
1961

Raise a mound of stone, around cor.

Cor. is located on gentle W. slope in heavy sagebrush, about 12 chs. W. of unimproved road with fence along W. side, bearing nearly N. and S.

At the cor. of secs. 13, 14, 23, and 24, which is reestablished (cor. stone missing) from the 4 original bearing trees. From the reestablished cor. the original bearing trees.

Chains

A spruce, 20 ins. diam., bears N. 28° 45' E., 22 lks. dist., marks nearly overgrown, visible 3W.

A spruce, 24 ins. diam., bears S. 33½° E., 11 lks. dist., marks partly overgrown, visible T22SR3W --

A spruce, 18 ins. diam., bears S. 77¾° W., 26 lks. dist., blazed, marks overgrown.

A spruce, 24 ins. diam., bears N. 17° W., 20 lks. dist., marks overgrown. (record bearing N. 11° W.)

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, brass cap mkd.

| | |
|------|-----|
| T22S | R3W |
| S14 | S13 |
| S23 | S24 |
| 1961 | |

Cor. is located on steep NE. slope, about 2½ chs. W. of deep gulch, draining SE., and in dense timber.

At the ¼ sec. cor. of secs. 13 and 14, which is reestablished (corner stone missing) at its record position from original bearing tree in sec. 14. There is no remaining evidence of the aspen bearing tree in sec. 13.

From the reestablished cor., original bearing tree.

An Alpine Fir, 36 ins. diam., bears S. 66½° W., 65 lks. dist., I open blaze and find scribe marks.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, to rock; brass cap mkd.

| | |
|------|-----|
| T22S | R3W |
| S14 | S13 |
| ¼ | |
| 1961 | |

Place collar of rock, around cor.

Cor. is located on a gradual E. slope, about 60 lks. W. of small swale draining S.

At the cor. of secs. 11, 12, 13, and 14, which is mkd. by a limestone, 16x12x8 ins., firmly set, mkd. 4 notches on S. and 1 notch on E. edge; witnessed by 2 remaining original bearing trees. There is no evidence of the 2 aspen bearing trees.

A cedar, 20 ins. diam., bears N. 85½° E., 27 lks. dist., mkd. T22SR3WS13 BT. (Record S. 85° 20' E., 19 lks.)

A cedar, 48 ins. diam., bears S. 27° W., 9 lks. dist., mkd. T22SR3WS14BT; (record S. 40° W., 9 lks.)

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with original stone buried on W. side of post; brass cap mkd.

Remuneration of Corners in T. 22 S., R. 3 W.

Chains

T22S R3W
S11 S12
S14 S13
1961

Cor. is located on a gradual SE. slope, about 3 chs. E. of wire fence bearing about N. and S., and about 4 chs. dist. NE. of unimproved road bearing nearly S. and NW. Timber to the N. and opening on the S.

247

tation of Corners in T. 24 S., R. 1 E.

Chains

The survey of west boundary (Salt Lake Meridian), a portion of the south boundary, and portion of the subdivisions of T. 24 S., R. 1 E., S. L. M., Utah, was executed by Bailey & Burrill, in 1874. The north boundary was surveyed by A. D. Ferron in 1877. The completion survey of the south boundary, and the subdivisions were executed by A. P. Hanson, in 1895.

The following field notes are those of the remonumentation of certain identified original corners of the Bailey & Burrill subdivisional lines in T. 24 S., R. 1 E. The position of each corner was mkd. by the original monument.

The corners remonumented were selected by the Forest Service as being adjacent to, or controlling the boundaries of Forest Service Lands. The monumentation was requested by and accomplished in cooperation with the Forest Service.

T. 24 S., R. 1 E.

At the cor. of secs. 29, 30, 31 and 32, which is mkd. by a lava stone, 19x10x4 ins., plainly mkd. with 1 notch on one edge and 5 notches on cornering edge, found lying on the ground at base of cedar fence post, marking the S. end of Forest Service wire fence from the N. A small sheep docking corral surrounds the corner.

At cor. point at W. base of cedar post.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with original cor. buried on the SW. side of post; brass cap mkd.

| | |
|------|-----|
| T24S | R1E |
| S30 | S29 |
| S31 | S32 |
| 1961 | |

No accessories available.

Cor. is located on nearly level ground, about 8 chs. W. of unimproved road, bearing about N. and S.

At the cor. of secs. 19, 20, 29 and 30, which is mkd. by a lava stone, 15x7x6 ins., firmly set, mkd. 2 notches on S. and 5 notches on E. edge; witnessed by few scattered rock around cor.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with original cor. buried on W. side of post; brass cap mkd.

| | |
|------|-----|
| T24S | R1E |
| S19 | S20 |
| S30 | S29 |
| 1961 | |

Raise a mound of stone around cor.

Cor. is located 1 lk. W. of N-S Forest Service wire fence.

Remonumentation of Corners in T. 24 S., R. 1 E.

Chains

At the $\frac{1}{4}$ sec. cor. of secs. 19 and 20, mkd. by a lava stone, 16x13x7 ins., mkd. $\frac{1}{4}$ on one face, lying in a small mound of stone.

At cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, over broken glass, original cor. buried on W. side of post; brass cap mkd.

$\frac{1}{4}$
T24S | R1E
S19 | S20
1961

Raise a mound of stone, around cor.

Cor. is located 2 lks. E. of Forest Service wire fence, on slight SW. slope.

At the cor. of secs. 17, 18, 19 and 20, which is mkd. by a lava stone, 12x11x8 ins., firmly set, mkd. 3 notches on S. and 5 notches on E. edge; no accessories.

At cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, original cor. buried on SW. side of post; brass cap mkd.

T24S | R1E
S18 | S17
S19 | S20
1961

Raise a mound of stone, around cor.

Cor. is located at W. base of cedar cor. fence post, wire fences bearing S., E. and W. Forest Boundary bears S. and W.

At the $\frac{1}{4}$ sec. cor. of secs. 18 and 19, which is mkd. by a lava stone, 13x10x7 ins., mkd. $\frac{1}{4}$ on one face, found lying in a scattered mound of stone, under fence line.

At cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 20 ins. in the ground to rock, original cor. buried on S. side of post; brass cap mkd.

$\frac{1}{4}$
T24SR1E
S18
S19
1961

Raise a mound of stone, around cor.

Cor. is located in E-W Forest Service wire fence, on a gradual E. slope, 90 lks. N. of unimproved road, parallel to fence.

Remonumentation of Corners in T. 26 S. R. 2 E.

Chains

History of surveys in T. 26 S., R. 2 E., Salt Lake Meridian, Utah. The north boundary (Fifth Standard Parallel South, Range 2 East) and the east boundary (Fremont Valley Guide Meridian) were surveyed by Bailey & Burrill, in 1876. The south and west boundaries, and portions of the subdivisions were surveyed by A. D. Ferron, in 1883. The completion survey of the subdivisions were executed by A. P. Hanson, in 1895. The township is situated within the Fishlake National Forest.

The following field notes are those of the remonumentation of certain identified original corners in T. 26 S., R. 2 E., Salt Lake Meridian, Utah. The position of each corners was mkd. by the original monument or determined from corner accessories as recorded in original survey record.

The remonumented corners were selected by the Forest Service as being adjacent to, or controlling the boundaries of Forest Service Lands. The monumentation was requested by and accomplished in cooperation with the Forest Service.

T. 26 S., R. 2 E.

At the $\frac{1}{4}$ sec. cor. of secs. 1 and 36, on S. bdy. of Tp., which is mkd. by a scoria stone, 21x12x7 ins., loosely set, mkd. $\frac{1}{4}$ on N. face; witnessed by a small mound of stone, N. of cor.

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 22 ins. in the ground to rock, original cor. buried on N. side of post; brass cap mkd.

| |
|-------------------|
| T26SR2E |
| <u> S 36</u> |
| $\frac{1}{4}$ S 1 |
| 1961 |

from which I mark

A cross (X), 8 ins. long, on NW. end of volcanic boulder, showing 6x4x2 ft., bears N. 80° E., $13\frac{1}{2}$ lks. dist.

And place collar of rock around post, and raise a mound of stone, 3x2 ft. N. of cor.

Cor. is located in E-W Forest Service wire fence, on slight W. slope on sagebrush flat.

At the cor. of secs. 1, 2, 35 and 36 on S. bdy. of Tp., which is mkd. by a granite stone, 24x16x10 ins., loosely set, mkd. 5 notches on W. and 1 notch on E. edge; witnessed by a scattered mound of stone.

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins. in the ground to rock, with original cor. set on W. side of post; brass cap mkd.

| |
|------------------|
| T26S R2E |
| <u>S35 S36</u> |
| S 2 S 1 |
| T27S |
| 1961 |

Remonumentation of Corners in T. 26 S., R. 2 E.

Chains

Raise a large mound of stone, around cor.

Cor. is located 1 lk. S. of E-W Forest Service wire fence, on top of low rise on S. slope. A gate in fence, and track road bearing NE. and SW., bears E. of cor. about 8 chs. dist.

At the $\frac{1}{4}$ sec. cor. of secs. 2 and 35, on S. bdy. of Tp., which is mkd. by a volcanic stone, 20x17x6 ins., firmly set, mkd. $\frac{1}{4}$ on N. face; witnessed by a mound of stone, 2x1 $\frac{1}{2}$ ft., E. of cor.

At cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with original cor. buried on E. side of post; brass cap mkd.

T26SR2E

| |
|------|
| S35 |
| — |
| S 2 |
| 1961 |

Raise a mound of stone, around post.

Cor. is located 35 lks. N. of E-W wire fence, on a gradual E. slope, about 2 chs. W. of small swale draining SE.

At the cor. of secs. 2, 3, 34 and 35, on S. bdy. of Tp., which is mkd. by a volcanic stone, 20x12x12 ins., loosely set in collar of rock, mkd. 2 notches on E. and 4 notches on W. edge; witnessed by a mound of stone, 2x1 ft. W. of cor.

At cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with original cor. buried on S. side of post; brass cap mkd.

T26S | R2E

| | |
|-----|-----|
| S34 | S35 |
| — | — |
| S 3 | S 2 |

T27S

1961

Raise a mound of stone, around cor.

Cor. is located 3 lks. S. of E-W wire fence, on a gradual S. slope in tall sagebrush, and about 10 chs. dist. W. of gate and track road.

At the cor. of secs. 4, 5, 32 and 33 on S. bdy. of Tp., which is mkd. by a lava stone, 15x5x5 ins., firmly set in collar of rock, mkd. 4 notches on E. and 2 notches on W. edge; witnessed by few scattered rock.

At cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, original cor. buried on S. side of post; brass cap mkd.

Chains

| | |
|------|-----|
| T26S | R2E |
| S32 | S33 |
| S 5 | S 4 |
| T27S | |
| 1961 | |

Place collar of rock around, and raise a mound of stone, $2 \times 1\frac{1}{2}$ ft., N. of cor.

Cor. is located 6 lks. S. of E-W Forest Service wire fence, on a S. slope in few scattered aspen, and about 8 chs. dist. E. of gate, and unimproved road bearing NE. and SW.

At the $\frac{1}{4}$ sec. cor. of secs. 6 and 31, on S. bdy. of Tp., which is mkd. by a volcanic stone, $18 \times 12 \times 5$ ins., firmly set in small mound of stone, mkd. $\frac{1}{4}$ on N. face; no other accessories.

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins. in the ground to rock, original cor. set on S. side of post; brass cap mkd.

| | |
|---------------|-----|
| T26SR2E | |
| $\frac{1}{4}$ | S31 |
| | S 6 |
| T27S | |
| 1961 | |

Raise a mound of stone around cor.

Cor. is located 5 lks. S. of E-W Forest Service wire fence, in shallow swale, drains SW., and about 4 chs. W. of gate, and road bearing NE. and SW.

At the cor. of secs. 19, 24, 25 and 30, on W. bdy. of Tp., which is mkd. by a lava stone, $15 \times 12 \times 8$ ins., firmly set, mkd. 2 notches on S. and 4 notches on N. edge; witnessed by a mound of stone, $3 \times 1\frac{1}{2}$ ft. E. of cor.

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, over broken glass, original cor. buried on W. side of post; brass cap mkd.

| | |
|------|-----|
| T26S | |
| R1E | R2E |
| S24 | S19 |
| S25 | S30 |
| 1961 | |

Place collar of rock, around cor.

Cor. is located on nearly level ground in sagebrush, and about 10 chs. W. of Fishlake, near S. end.

At the closing cor. of secs. 3 and 4, on the N. bdy. of Tp., which

Reconsecration of Corners in T. 26 S., R. 2 E.

is mkd. by a lava stone, 13x11x10 ins., firmly set, mkd. 3 notches on E. and W., and 5 notches on S. edge; witnessed by a small mound of stone to the E.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, over broken glass, original cor. buried on S. side of post; brass cap mkd.

T25S
 833
 S4 | S3
 T26S | R2E
 CC
 1961

Place collar of rock around, and raise a mound of stone, S. of cor.

Cor. is located N. 71 lks. dist., from wire fence bearing approximately E-W and E. 85 lks. dist. of main road along W. side of Fishlake. This cor. is W. 2.84 chs. (record 2.80 chs.) dist. from the S.C. of secs. 33 and 34.

At the S.C. of secs. 33 and 34, on S. bdy. T. 25 S., R. 2 E., which is mkd. by a lava stone, 16x10x8 ins., firmly set, mkd. with 3 notches on E. and W., and 6 notches on N. edge; witnessed by a small mound of stone to the W.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, with original cor. buried on N. side of post; brass cap mkd.

SQ
 T25S | R2E
 S33 | S34
 S3
 1961

Place collar of rock around post, and raise a mound of stone, N. of cor.

Cor. is located 4 lks. S. of wire fence bearing nearly E-W, in swampy ground, and about 8 chs. N. of N. end of Fishlake.

Remonumentation of Corners in T. 26 S. R. 3 E.

Chains

The survey of the south and east boundaries and the subdivisions of Township 26 South, Range 3 East, Salt Lake Meridian, Utah, was executed by Andrew P. Hanson, in 1895. The west boundary or Fremont Valley Guide Meridian, was surveyed by Bailey & Burrill, in 1876. The 5th Standard Parallel South, through R. 3 E., (N. bdy.) was surveyed by Ferdinand Dickert, in 1878.

The following field notes are those of the remonumentation of certain identified original corners in T. 26 S., R. 3 E., and on Homestead Entry Survey No. 106, situated in sec. 34. H.E.S. No. 106 was surveyed by R. D. Garver, Forest Examiner, in 1916. The position of each corner was mkd. by the original monument or determined from corner accessories as recorded in original survey record.

The cors. remonumented were selected by the Forest Service as being adjacent to, or controlling the boundaries of Forest Service Lands. The monumentation was requested by and accomplished in cooperation with the Forest Service.

T. 26 S., R. 3 E.

At the $\frac{1}{4}$ sec. cor. of secs. 1 and 36, on S. bdy. of Tp., which is mkd. by a lava stone, 15x8x6 ins., firmly set, mkd. $\frac{1}{4}$ on N. face; witnessed by a mound of stone, 2x1 ft. W. of cor.

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with original cor. buried on W. side of post; brass cap mkd.

T26S R3E
 $\frac{1}{4}$ $\frac{S36}{S1}$
 1961

Place collar of rock around post, and rebuild mound of stone to W.

Cor. is located on flat rise in short sagebrush, about 5 chs. dist. E. of Utah State Road No. 72, between Fremont and Emery, Utah.

At the cor. of secs. 1, 2, 35 and 36, on S. bdy. of Tp., which is mkd. by a lava stone, 17x9x8 ins., plainly mkd. with 5 grooves on one side, and 1 groove on opposite side, found lying on the ground at base of cor. fence post, fences bearing S. and W.

At point 2 lks. NE. of center of cedar cor. post.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, over broken glass, with original cor. buried on N. side of post; brass cap mkd.

T26S | R3E
 $\frac{S35 | S36}{S2 | S1}$
 T27S
 1961

Raise a mound of stone, 4 ft. base around post.

Cor. is located on slight SW. slope in sagebrush, at cor. of Forest Service wire fence bearing S. and W.

Remonumentation of Corners in T. 26 S., R. 3 E.

Chains

At the cor. of secs. 2, 3, 34 and 35, on S. bdy. of Tp., which is mkd. by a volcanic stone, 18x9x7 ins., set in a small mound of stone, mkd. 2 notches on E. and 4 notches on W. edge; no other accessories.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with original cor. buried on N. side of post; brass cap mkd..

| | |
|------------|------------|
| T26S | R3E |
| <u>S34</u> | <u>S35</u> |
| S 3 | S 2 |
| T27S | |
| 1961 | |

Raise a mound of stone around, and N. of cor.

Corner is located on top of hill, near W. edge, 8 lks. S. of E-W Forest Service wire fence, and about ¼ mile E. of Fremont Reservoir.

At the cor. of secs. 3, 4, 33 and 34, on S. bdy. of Tp., which is mkd. by a volcanic stone, 19x15x10 ins., mkd. 3 notches on 2 opposite sides, found lying on the ground at S. base of small mound of stone, and under E-W fence.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground to rock, over broken glass, with original cor. set on W. side of post; brass cap mkd.

| | |
|------------|------------|
| T26S | R3E |
| <u>S33</u> | <u>S34</u> |
| S 4 | S 3 |
| T27S | |
| 1961 | |

Raise a mound of stone to top, around cor.

Cor. is located on slight W. slope, about 1 ch. W. of low, flat ridge bearing nearly N. and S., in Forest Service fence.

At the ¼ sec. cor. of secs. 4 and 33, on S. bdy. of Tp., which is mkd. by volcanic stone, 18x9x8 ins., set in a small mound of stone, mkd. ¼ on N. face; no other accessories.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with original cor. buried on N. side of post; brass cap mkd.

| | |
|------------|-----|
| T26S | R3E |
| <u>S33</u> | |
| S 4 | |
| 1961 | |

Raise a mound of stone, around cor.

Cor. is located on gentle NE. slope, 1 lk. N. of E-W Forest Service wire fence, and 20 lks. W. of center of gate and track road, bearing nearly N. and S.

Location of Corners in T. 26 S., R. 3 E.

Chains

At the cor. of secs. 4, 5, 32 and 33, on S. bdy. of Tp, which is mkd. by a volcanic stone, 16x12x6 ins. mkd. 2 notches on one side and 4 notches on opposite side, lying in a small scattered mound of stone, in E-W fence.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 14 ins. in the ground to bedrock, original cor. set on N. side of post; brass cap mkd.

| | |
|------|-----|
| T26S | R3E |
| S32 | S33 |
| S 5 | S 4 |
| T27S | |
| 1961 | |

Raise a mound of stone, 4 ft. base, to top, around cor.

Cor. is located in E-W Forest Service wire fence, about 10 chs. E. of gate, and track road bearing about NW. and SE.

At the ¼ sec. cor. of secs. 5 and 32, on S. bdy. of Tp., which is mkd. by a volcanic stone, 14x11x9 ins., firmly set, mkd. ¼ on N. face; witnessed by a small scattered mound of stone, N. of cor.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground to rock, original cor. buried on N. side of post; brass cap mkd.

| | |
|------|-----|
| T26S | R3E |
| ¼ | S32 |
| | S 5 |
| T27S | |
| 1961 | |

Raise a mound of stone around, and N. of cor.

Cor. is located on a gradual NE. slope, 7 lks. S. of E-W Forest Service fence, and about 3 chs. W. of gate, and track road bearing NW. and S. 70° E.

At the ¼ sec. cor. of secs. 6 and 31, on S. bdy. of Tp., which is mkd. by a volcanic stone, 17x16x9 ins., mkd. ¼ on one face, lying in a small mound of stone, under fence.

At cor. point.

Set an iron post, 1 in. diam., 36 ins. long, 10 ins. in the ground to bedrock, with original cor. set on E. side of post; brass cap mkd.

| | |
|------|-----|
| T26S | R3E |
| ¼ | S31 |
| | S 6 |
| T27S | |
| 1961 | |

Raise a large mound of stone to top, around cor.

Cor. is located on nearly level bench, in E-W Forest Service wire fence, about 3 chs. W. of small mahogany grove.

Remonumentation of Corners in T. 26 S., R. 3 E.

Chains

At the cor. of Tps. 26 and 27 S., Rs. 2 and 3 E., which is mkd. by a scoria rock, 20x12x8 ins., firmly set, mkd. with 6 notches on 4 sides; witnessed by a mound of stone, 3x2 ft., W. of cor.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground to rock, with original cor. set on S. side of post; brass cap mkd.

| | |
|------------|------------|
| T26S | |
| R2E | R3E |
| <u>S36</u> | <u>S31</u> |
| S 1 | S 6 |
| T27S | |
| 1961 | |

Place collar of rock around post.

Cor. is located on nearly flat bench, in E-W Forest Service wire fence, and about 10 chs. E. of the junction of a fence from N.

At the cor. of secs. 1, 2, 11 and 12, which is mkd. by a red scoria stone, 16x8x6 ins., firmly set, mkd. 5 notches on S. and 1 notch on E. edge; witnessed by a deeply embedded mound of stone, 2x1 ft., W. of cor.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with original cor. buried on E. side of post; brass cap mkd.

| | |
|------------|------------|
| T26S R3E | |
| <u>S 2</u> | <u>S 1</u> |
| S11 | S12 |
| 1961 | |

Rebuild mound of stone to 2x2 ft. W. of cor.

Cor. is located on nearly level ground in narrow valley, in short sagebrush, 20 lks. E. of unimproved road bearing N. 20° W. and S. 20° E.

At the ¼ sec. cor. of sec. 34 and 35, which is mkd. by a lava stone, 19x10x6 ins., firmly set, mkd. ¼ on W. face; witnessed by a small mound of stone on the W. This cor. is identical with cor. No. 1-HES No. 106, and is mkd. by a lava stone, 15x10x3 ins., mkd. 1-HES 1-6 on W. side. Stone is set against the ¼ cor. stone.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with original ¼ stone buried on E. side, and the HES stone set on W. side of post; brass cap mkd.

| | |
|------------|------------|
| T26SR3E | |
| ¼ | |
| <u>S34</u> | <u>S35</u> |
| 1961 | |

Place collar of rock around, and inlarge mound of stone, W. of cor.

Chains

Cor. is located on gentle S. slope in sagebrush, about 60 lks. S. of small ditch, course E., and about 4 chs. N. of dirt road along N. side of Fremont Reservoir.

H.E.S. No. 106

H. E. Survey No. 106, situated in sec. 34, T. 26 S., R. 3 E.

At cor. No. 2-HES No. 106, which is mkd. by a lava stone, 25x15x6 ins., firmly set, mkd. 2-HES 106 on W. face and 1/16 on N. face; unwitnessed.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with original cor. set along S. side of post; brass cap mkd.

| |
|------|
| HES |
| 106 |
| 2 |
| 1961 |

Raise a mound of stone around cor.

Corner is located on open NW. slope, about 3 chs. SE. of road along E. side of Fremont Reservoir.

At cor. No. 7-HES No. 106, which is mkd. by a volcanic stone, 22x15x7 ins., firmly set, mkd. 7-HES 106 on W. face and cc on N. side; witnessed by a mound of earth, SW. of cor.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with original cor. set on W. side of post; brass cap mkd.

| |
|------|
| 7 |
| HES |
| 106 |
| 1961 |

Place collar of rock around cor.

At cor. No. 13-HES No. 106, which is mkd. by volcanic boulder, 24x20x16 ins. nearly flush with ground level, mkd. on NW. edge of top with a cross (X) 13 HES (unable to find other marks) I destroy the X, witnessed by a mound of stone over cor. I move boulder sufficient to place post at exact cor. point and

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground, to rock, and supported in a mound of stone, 4 ft. base to top; brass cap mkd.

| |
|------|
| 13 |
| HES |
| 106 |
| 1961 |

Cor. is located on steep E. slope.

Chains

The survey of the N., S., E. and W. boundaries and the subdivisions of T. 27 S., R. 2 W., Salt Lake Meridian, Utah, were executed by Breckon & McCarty, in 1897.

The following field notes are those of the remonumentation of certain identified original corners in T. 27 S., R. 2 W.; the position of each corner was mkd. by the original monument, or determined from corner accessories as recorded in original surveyed record.

The corners remonumented were selected by the Forest Service as being adjacent to, or controlling the boundaries of Forest Service Lands. The monumentation was requested by and accomplished in cooperation with the Forest Service.

T. 27 S., R. 2 W.


At the cor. of secs. 6 and 7, on W. bdy. of Tp., which is mkd. by a lava stone, 11x10x6 ins., firmly set, mkd. with 5 notches on S. and 1 notch on N. edge; witnessed by 2 original bearing trees.

An aspen, 13 ins. diam., bears N. 67½° E., 61 lks. dist., blazed, marks overgrown.

Alpine Fir, 17 ins. diam., bears S. 20½° E., 34½ lks. dist., marks partly overgrown, visible T27S RW BT.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground original cor. buried on S. side of post; brass cap mkd.



Cor. is located on a gradual S. slope in shallow swale, in dense fir and aspen timber.


At the ¼ sec. cor. of sec. 6, on W. bdy. of Tp., which is mkd. by a lava stone, 14x13x7 ins., firmly set, mkd. ¼ on W. face; witnessed by 2 original bearing trees and few scattered rock.

An aspen, 14 ins. diam., bears N. 79° E., 75 lks. dist., marks overgrown.

An aspen, 16 ins. diam., bears S. 73° E., 58 lks. dist., mkd. ¼ S BT.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground to rock, original cor. buried on E. side of post; brass cap mkd.



Place collar of rock around cor.

Chains

Cor. is located on a gradual N. slope at S. edge of cor. of old log fence bearing E. and N., in dense timber, and about 2 chs. from N. edge of the timber.

At the cor. of Tps. 26 and 27 S., R. 2 W., which is mkd. by a volcanic stone, 13x9x6 ins., firmly set, mkd. with 6 notches on N., S., and E. sides; witnessed by a small mound of stone, on the W.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground, with original cor. buried on W. side of post; brass cap mkd.

| | |
|------|------|
| | T26S |
| | R2W |
| | S31 |
| R2½W | S 6 |
| | T27S |
| | R2W |

1961

Raise a mound of stone, around cor.

Cor. is located on slight S. slope in swampy ground, 15 lks. W. of a N-S log fence, and about 2 chs. S. of gate and old road bearing about E. and W.

At the ¼ sec. cor. of secs. 6 and 31, on N. bdy. of Tp., which is mkd. by a lava stone, 18x10x10 ins., firmly set, mkd. ¼ on N. face; witnessed by a small mound of stone, N. of cor.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground, with original cor. buried on N. side of post; brass cap mkd.

| | |
|---|---------|
| | T26SR2W |
| | S31 |
| ¼ | S 6 |
| | T27S |
| | 1961 |

Place collar of rock around cor.

Cor. is located in open swamp area. Old log cabin bears S. 7° E., about 12 chs. dist.

At the cor. of secs. 5, 6, 31 and 32, on N. bdy. of Tp., which is mkd. by a volcanic stone, 13x11x4 ins., firmly set, mkd. with 5 notches on E. and 1 notch on W. edge; witnessed by 1 original bearing tree.

Alpine Fir, 19 ins. diam., bears S. 12° W., 138 lks. dist., marks partly overgrown, visible is R2 S6.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, original cor. buried on W. side of post; brass cap mkd.

Remonumentation of Corners in T. 27 S., R. 2 W.

Chains

| | |
|------|-----|
| T26S | R2W |
| S31 | S32 |
| S 6 | S 5 |
| T27S | |
| 1961 | |

from which I mark

An aspen, 9 ins. diam., bears N. 7° E., 108 lks. dist., mkd.
T26S R2W S32 BT.

An aspen, 13 ins. diam., bears N. 39° W., 76 lks. dist., mkd.
T26S R2W S31 BT.

Cor. is located in opening, fir timber to the S. and aspen to the N.,
10 lks. S. of cor. of log fences bearing E., W. and N.

At the cor. of secs. 5, 6, 7 and 8, which is mkd. by a lava stone,
14x9x6 ins., mkd. with 5 notches on 2 cornering sides, found lying
on the ground at E. base of small scattered mound of stone.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 5 ins. in the ground
to bedrock, original cor. set on W. side of post, and supported in a
large mound of stone to top; brass cap mkd.

| | |
|------|-----|
| T27S | R2W |
| S 6 | S 5 |
| S 7 | S 8 |
| 1961 | |

from which I mark

An aspen, 8 ins. diam., bears N. 82° E., 174 lks. dist., mkd.
in bark T27S R2W S5 BT.

Alpine fir, 12 ins. diam., bears S. 3½° E., 103 lks. dist., mkd.
T27S R2W S8 BT.

Cor. is located in opening on top of low flat rise, bearing NW. and
SE.

At the cor. of secs. 19, 20, 29 and 30, which is mkd. by a lava
stone, 14x7x6 ins., firmly set, mkd. with 2 notches on S. and 5
notches on E. edge; witnessed by a mound of stone, 2x1½ ft., W. of
cor.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground
with original cor. buried on W. side of post; brass cap mkd.

| | |
|------|-----|
| T27S | R2W |
| S19 | S20 |
| S30 | S29 |
| 1961 | |

Place collar of rock around cor.

Cor. is located in open sage flat, slight W. exposure, about 4 chs.
N. of unimproved road bearing W. and SE.

CERTIFICATE OF CADASTRAL ENGINEER

I, **Andrew Nelson**, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 15th day of February, 1961, I have ~~surveyed~~ **remonumented corners in T. 20 S., R. 2 W., T. 22 S., R. 3 W., T. 24 S., R. 1 E., Tps. 26 S., Rs. 2 and 3 E., and T. 27 S., R. 2 W.**

of the **Salt Lake** Meridian, in the State of **Utah**, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in the specific manner described in the foregoing field notes.

Salt Lake City, Utah

June 28, 1962

Andrew Nelson

Andrew Nelson - Cadastral Surveyor

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT,
MAY 1 1962
Washington, D. C., 19

The foregoing field notes of the ~~survey of~~ **remonumentation of corners in T. 20 S., R. 2 W., T. 22 S., R. 3 W., T. 24 S., R. 1 E., Tps. 26 S., Rs. 2 and 3 E., and T. 27 S., R. 2 W., Salt Lake Meridian, Utah.**

executed by **Andrew Nelson**

having been critically examined and found correct, are hereby approved.

[Signature]
Chief, Division of Engineering

CERTIFICATE OF TRANSCRIPT

I CERTIFY that the foregoing transcript of the field notes of the above-described surveys in ... is a true copy of the original field notes.

Cadastral Engineering Staff Officer.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

ORIGINAL

FIELD NOTES

OF

REMONUMENTATION OF CORNERS IN

TOWNSHIPS 35 SOUTH, RANGES 6, 7 and 8 WEST

TOWNSHIPS 36 SOUTH, RANGES 7, 8 and 9 WEST

TOWNSHIPS 37 SOUTH, RANGES 6, 7 and 9 WEST

TOWNSHIPS 37 SOUTH, RANGES 14, 15 and 16 WEST

TOWNSHIPS 38 SOUTH, RANGES 15 and 16 WEST

Of the SALT LAKE Meridian,

the State of UTAH

EXECUTED BY

Andrew Nelson, Cadastral Surveyor

Under special instructions dated February 15, 1961, which provided

for the surveys included under Group No. 447, approved February 16, 1961.

and assignment instructions dated April 27, 1961.

Survey commenced June 27, 1961.

Survey completed July 6, 1961.


INDEX DIAGRAM

Township _____, Range _____

| | | | | | |
|----|----|----|----|----|----|
| 6 | 5 | 4 | 3 | 2 | 1 |
| 7 | 8 | 9 | 10 | 11 | 12 |
| 13 | 17 | 16 | 15 | 14 | 18 |
| 19 | 20 | 21 | 22 | 23 | 24 |
| 30 | 29 | 28 | 27 | 26 | 25 |
| 31 | 32 | 33 | 34 | 35 | 36 |

CORNER REMONUMENTATION INDEX DIAGRAM


Township 35 South, Range 6 West, Salt Lake Meridian

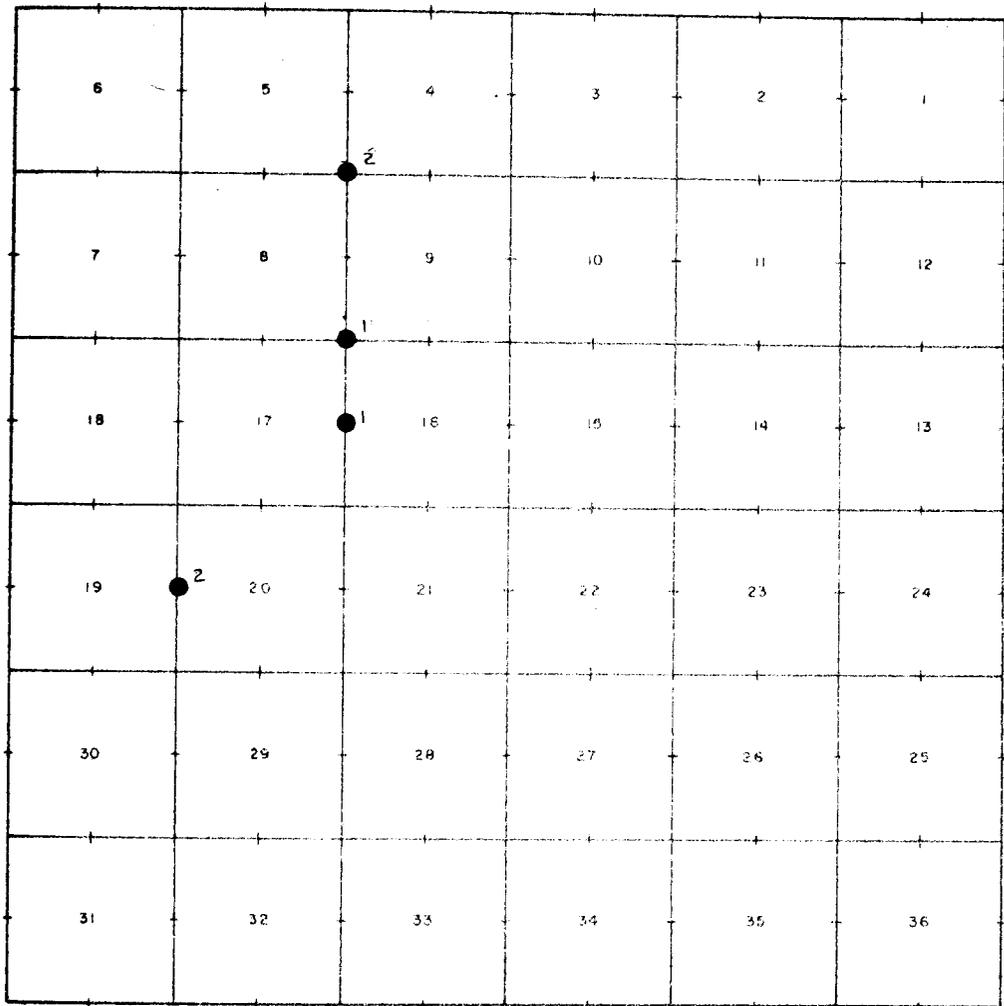

"D"


CORNER REMONUMENTATION
INDEX DIAGRAM

Township 35 South, Range 7 West, Salt Lake Meridian

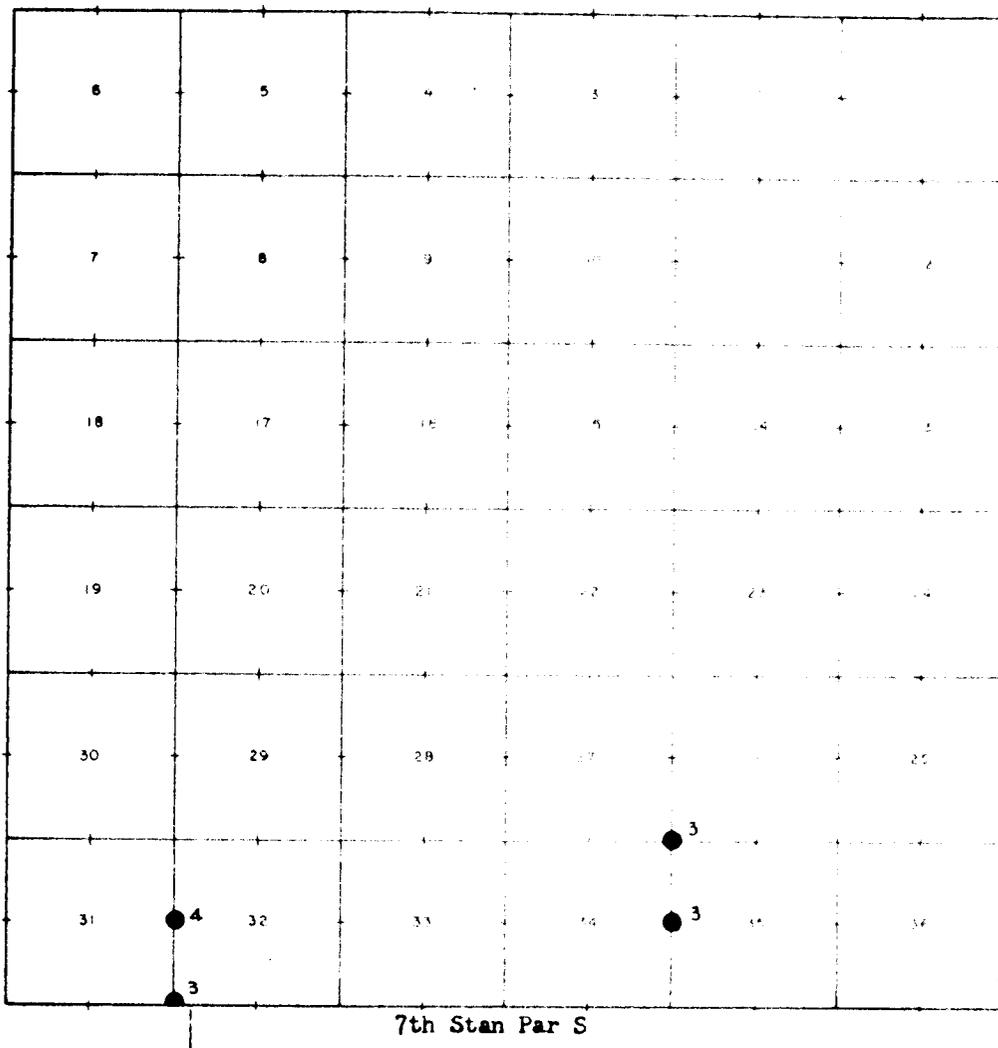


CORNER REMONUMENTATION INDEX DIAGRAM

Township 35 South, Range 8 West, Salt Lake Meridian

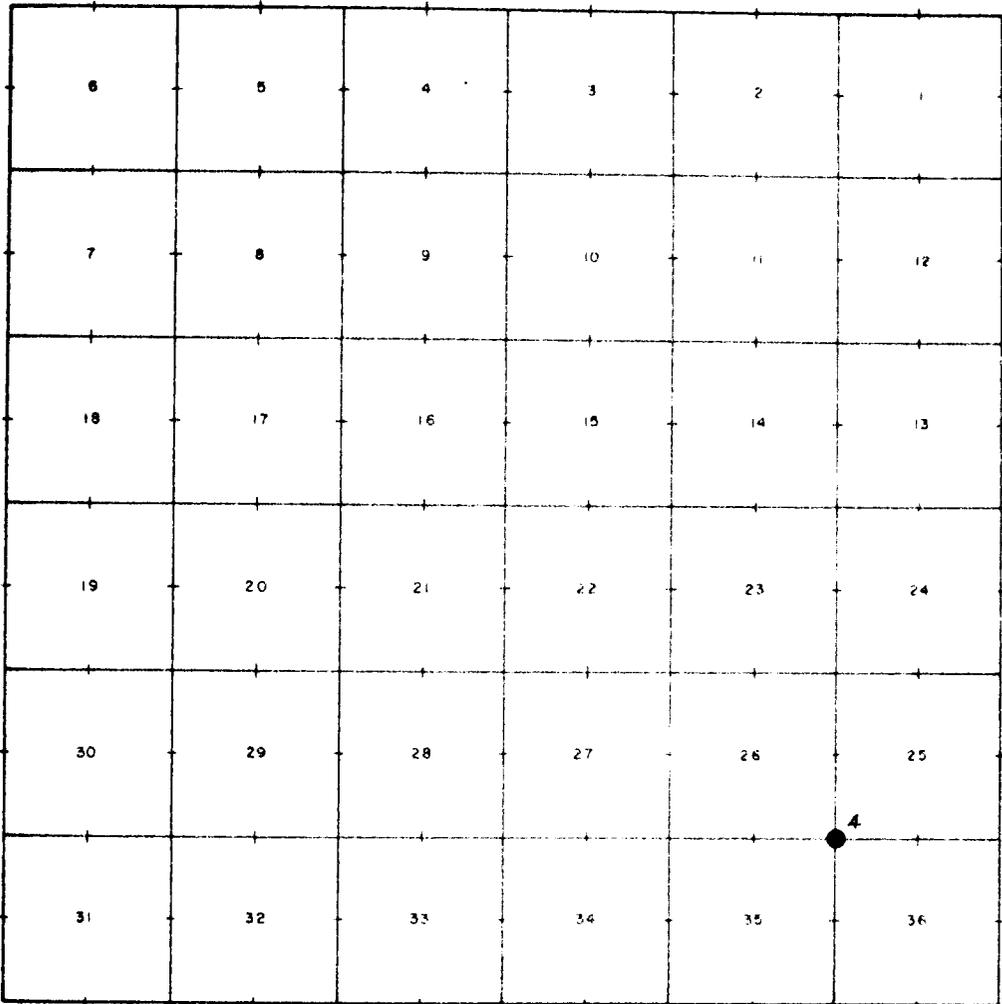


CORNER REMONUMENTATION
INDEX DIAGRAM

Township 36 South Range 7 West Salt Lake Meridian

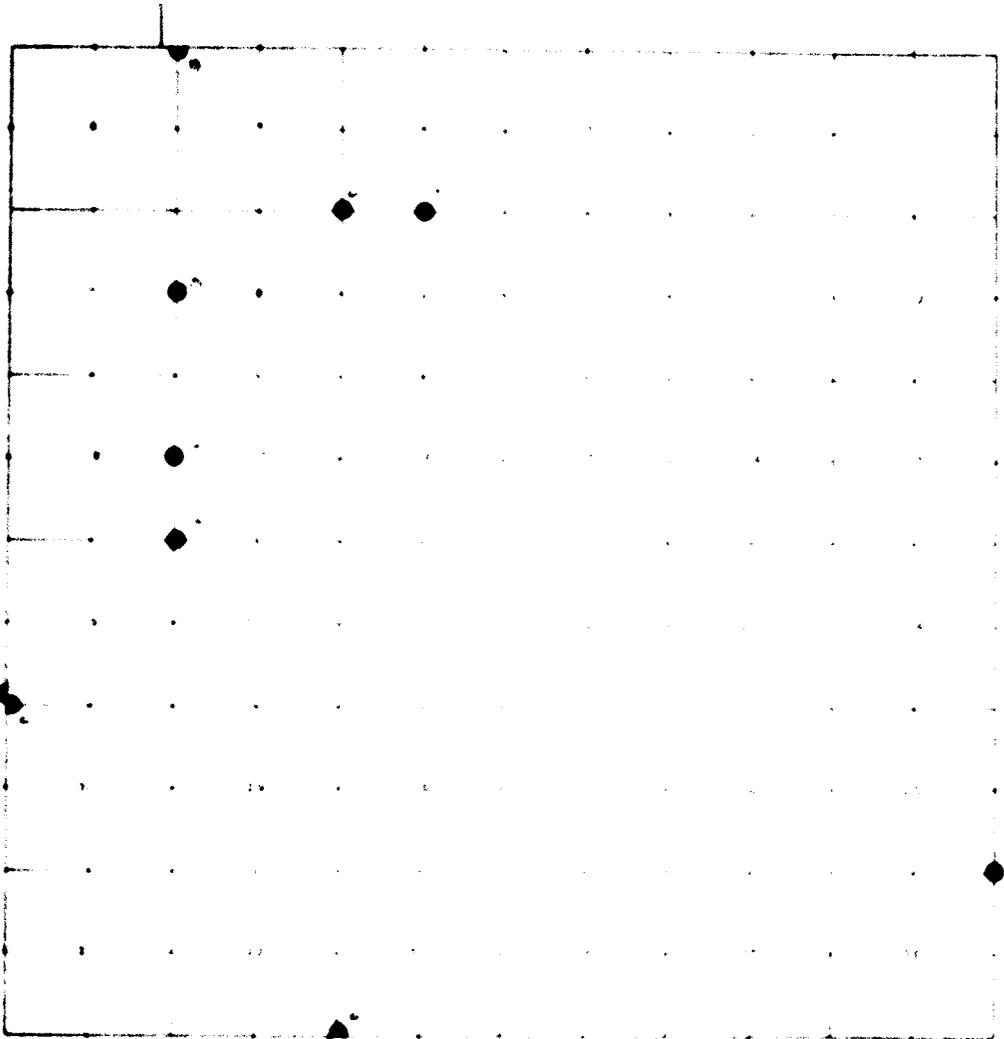

CORNER REMONUMENTATION INDEX DIAGRAM


Township 36 South, Range 9 West, Salt Lake Meridian

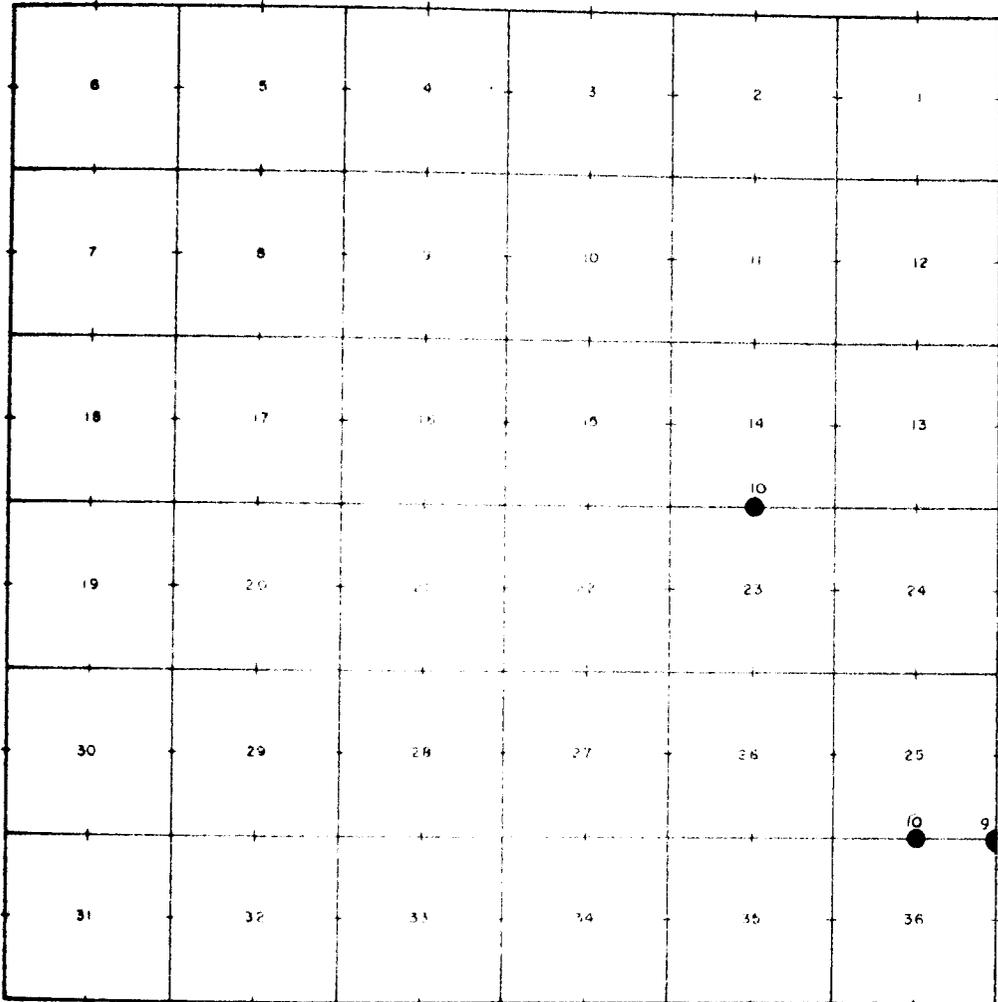

CORNER REMONUMENTATION


INDEX DIAGRAM

Township 37^r South, Range 6 West, Salt Lake Meridian

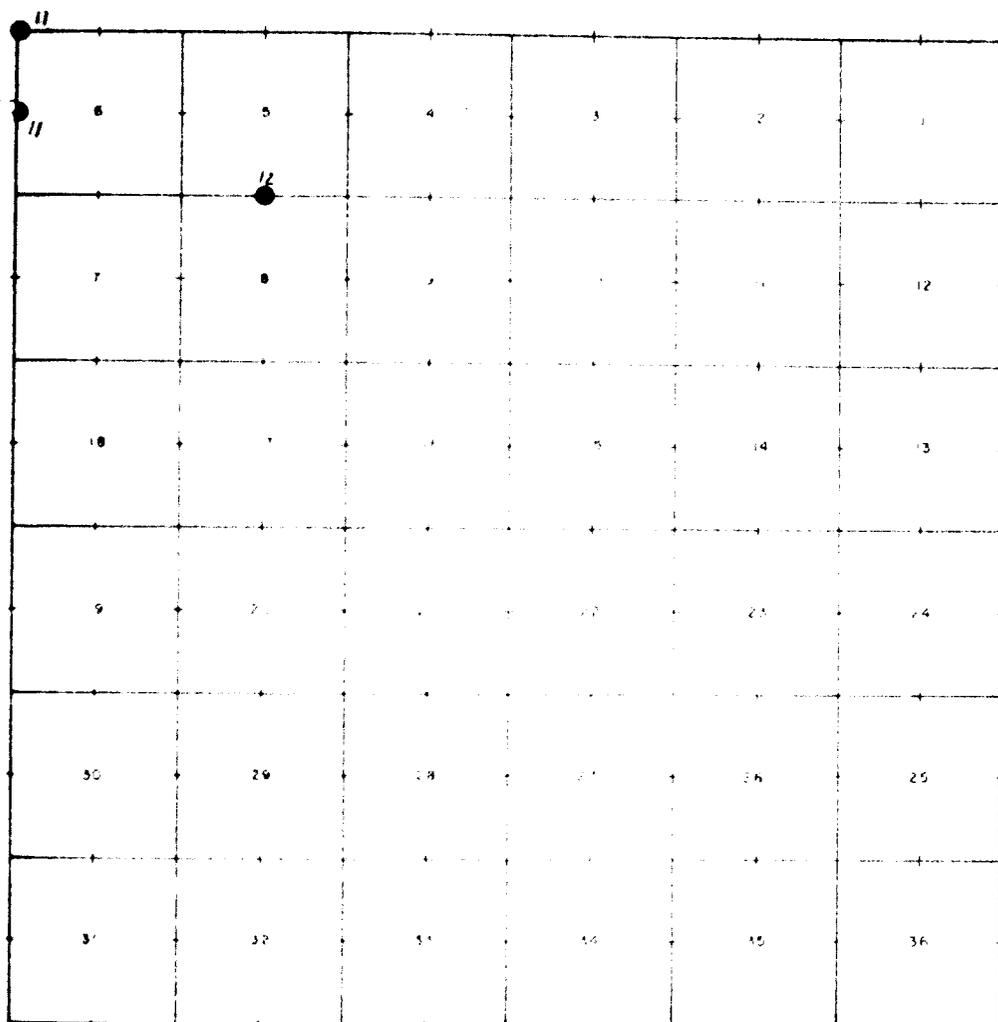


CORNER REMONUMENTATION INDEX DIAGRAM

Township 37 South, Range 7 West, Salt Lake Meridian

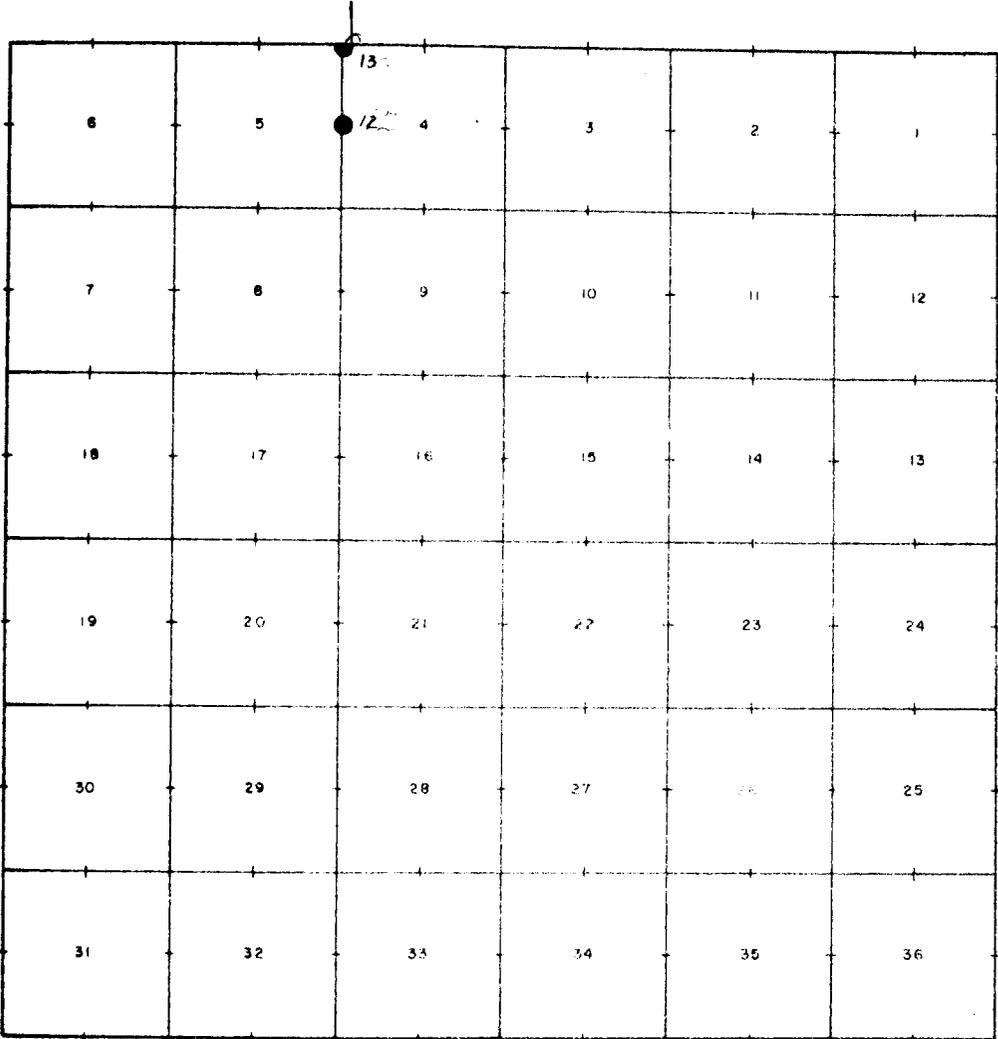


CORNER REMONUMENTATION INDEX DIAGRAM

Township 37 South, Range 9 West, Salt Lake Meridian

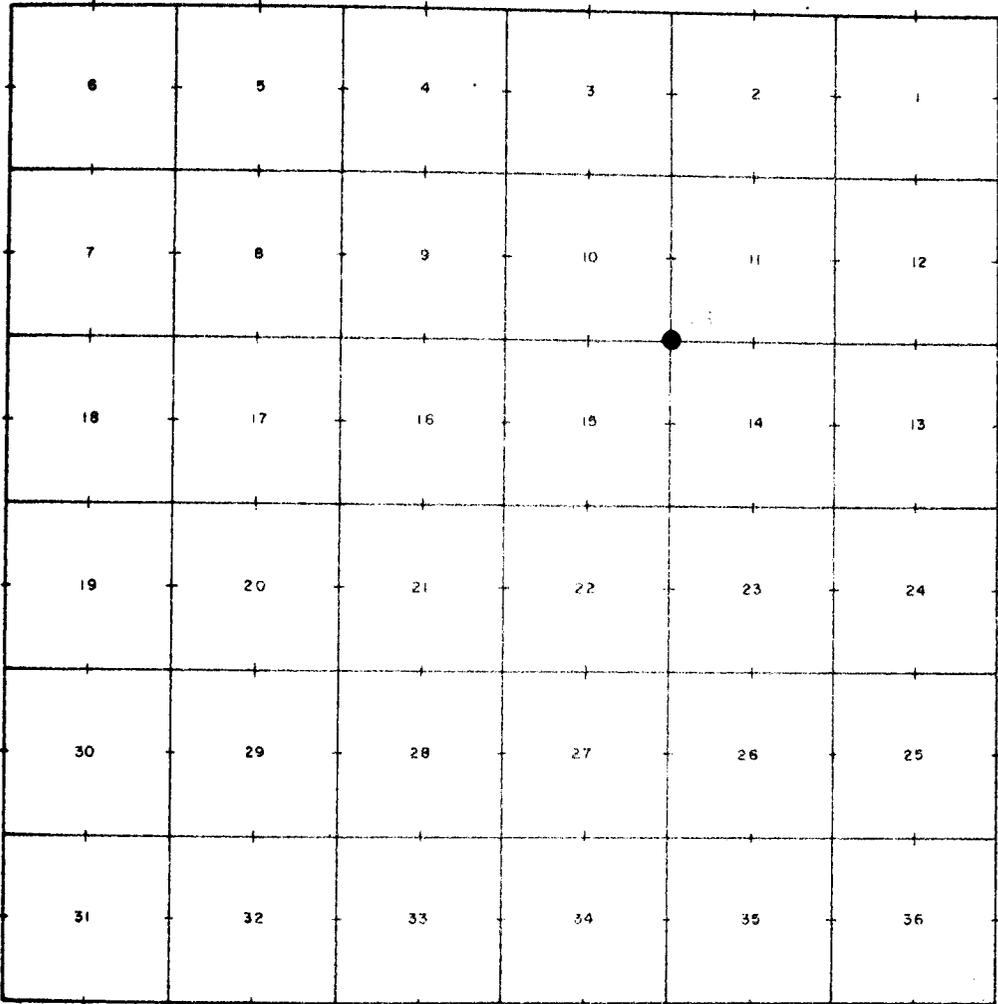


CORNER REMONUMENTATION
INDEX DIAGRAM

Township 37 South, Range 14 West, Salt Lake Meridian

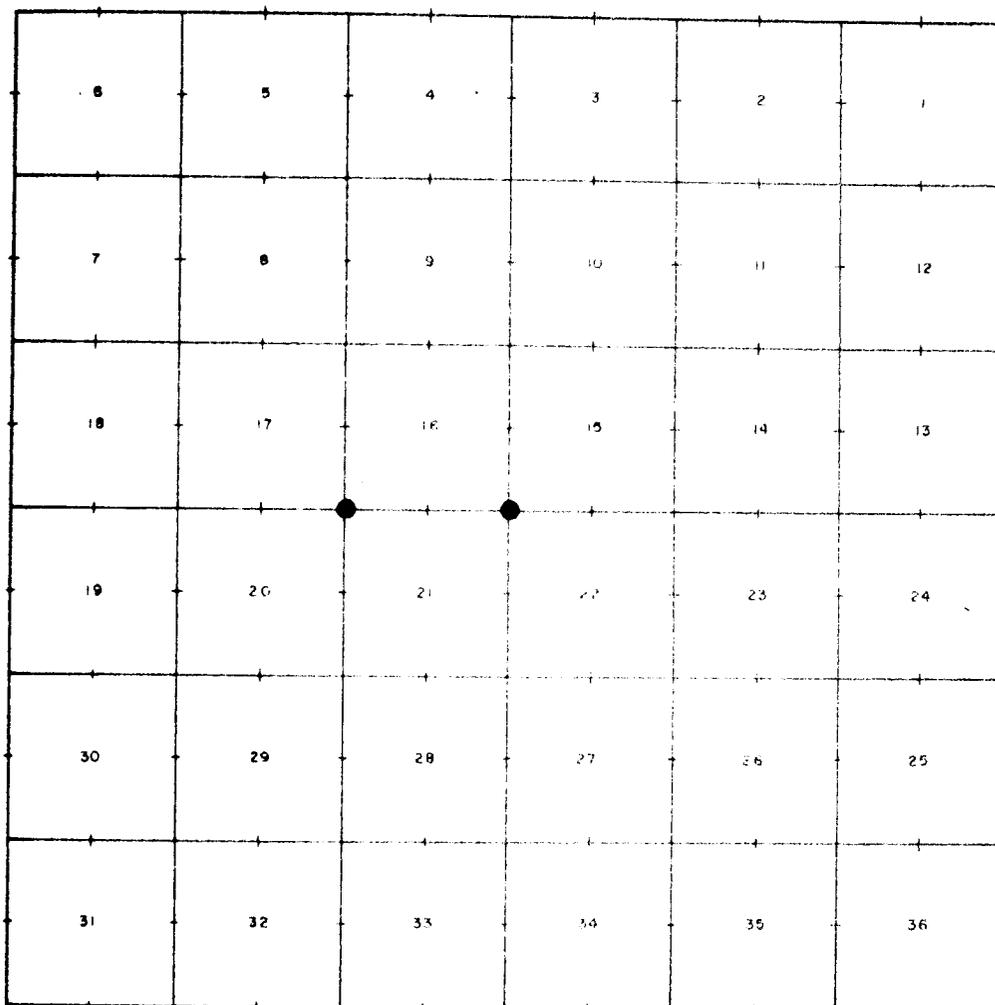


CORNER REMONUMENTATION INDEX DIAGRAM

Township 37 South, Range 15 West, Salt Lake Meridian

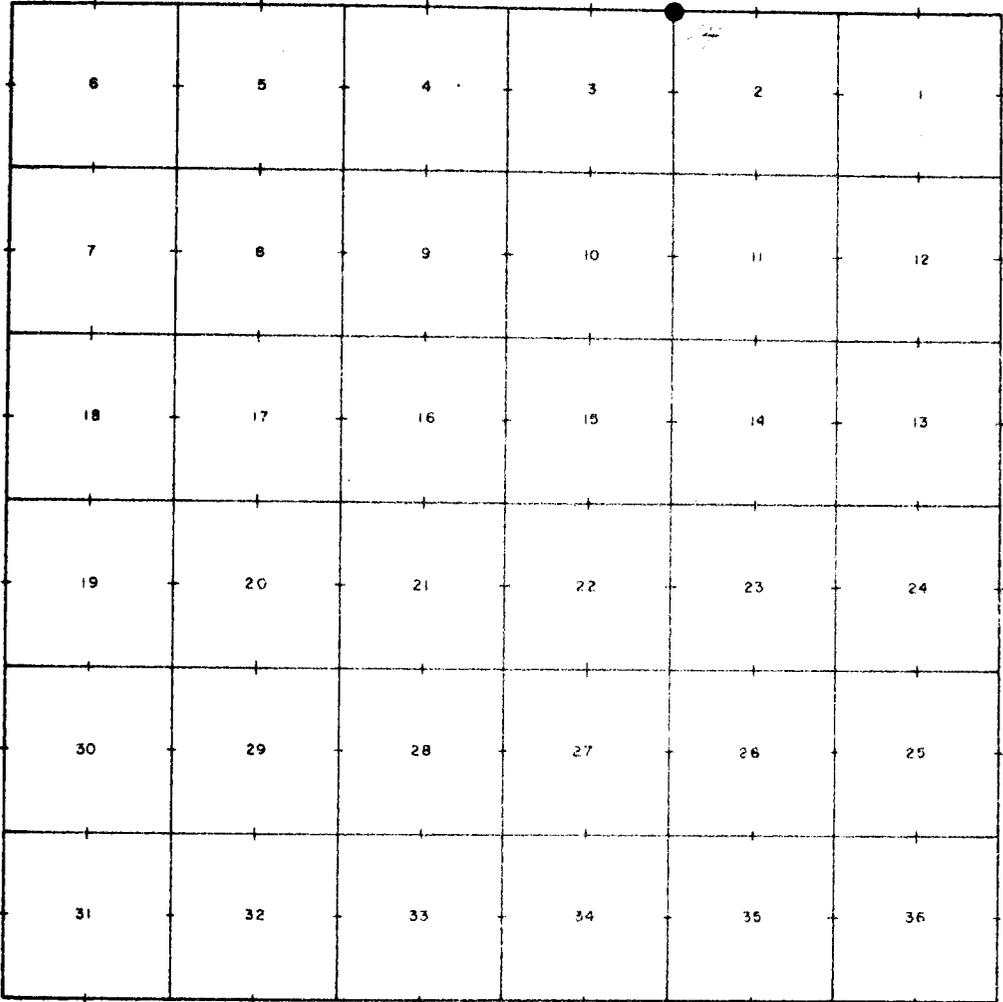


CORNER REMONUMENTATION INDEX DIAGRAM

Township 37 South, Range 16 West, Salt Lake Meridian

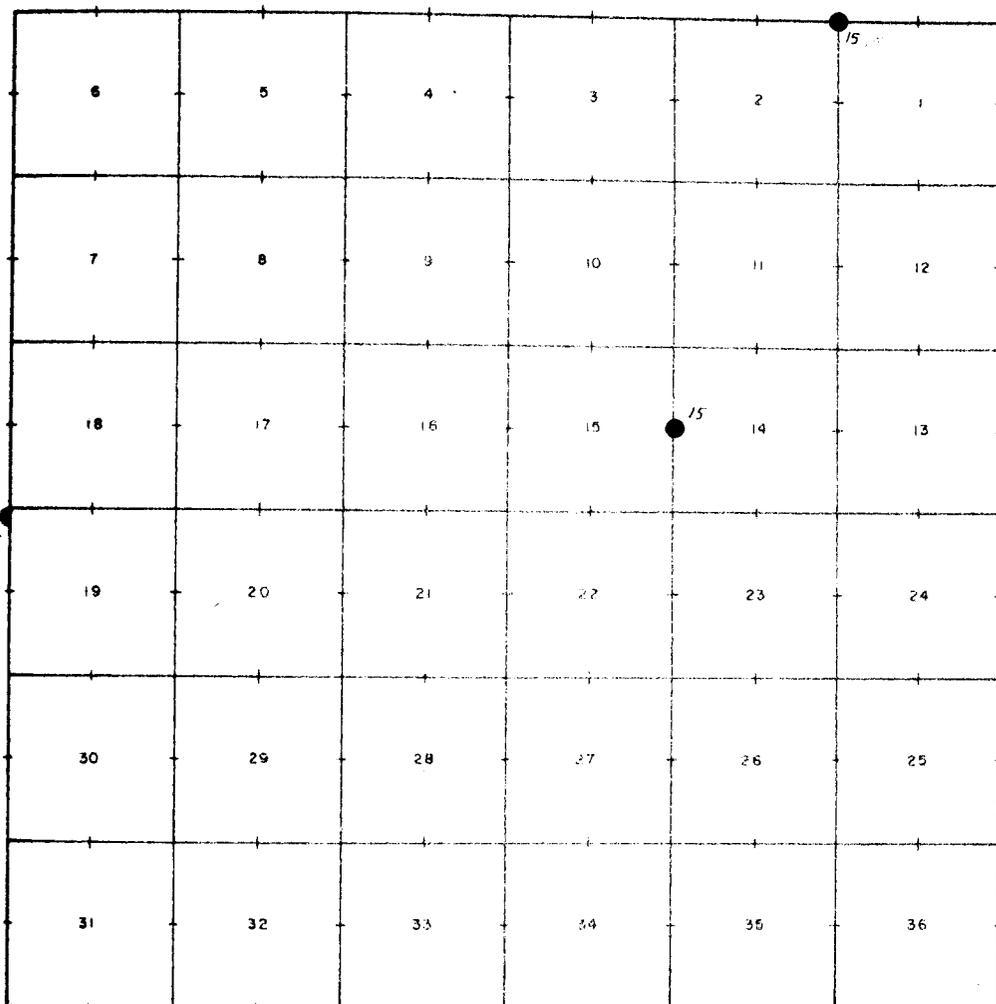


CORNER REMONUMENTATION
INDEX DIAGRAM

Township 36 South Range 15 West Salt Lake Meridian

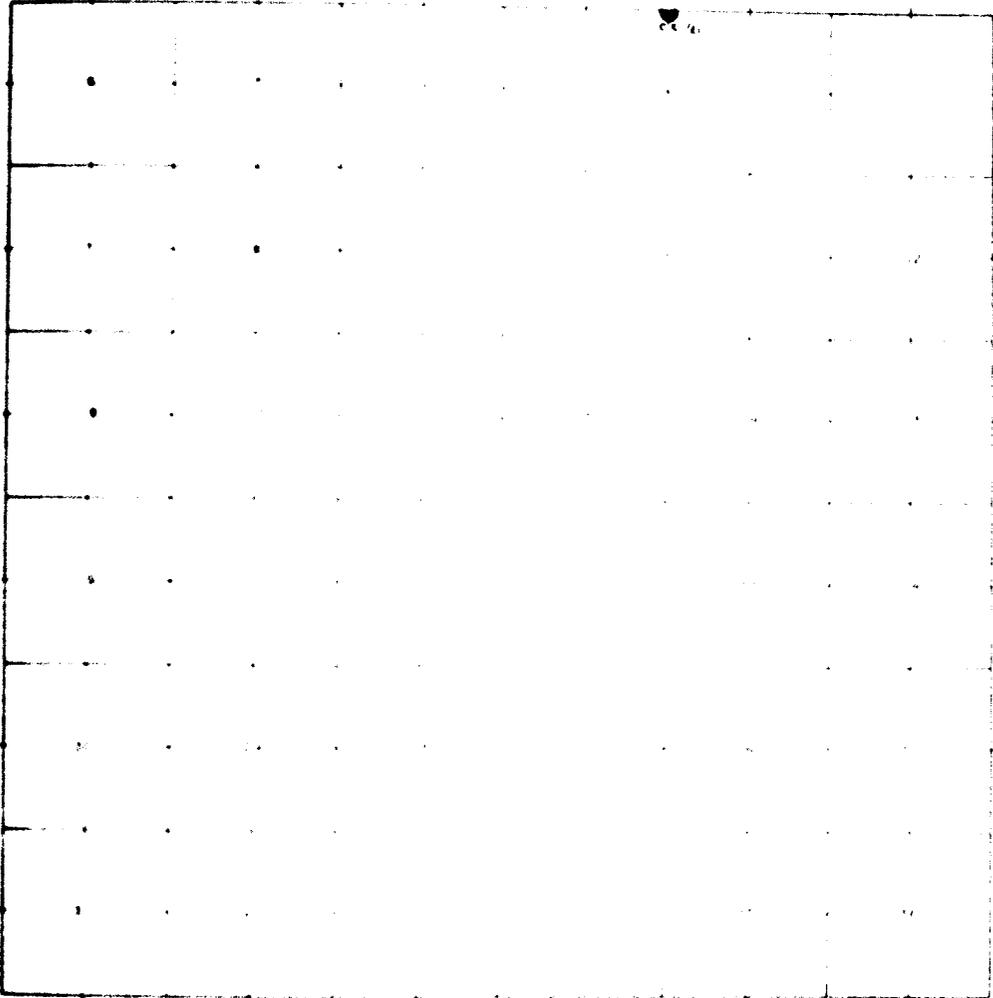


CORNER REMONUMENTATION INDEX DIAGRAM

Township 38 South, Range 16 West, Salt Lake Meridian

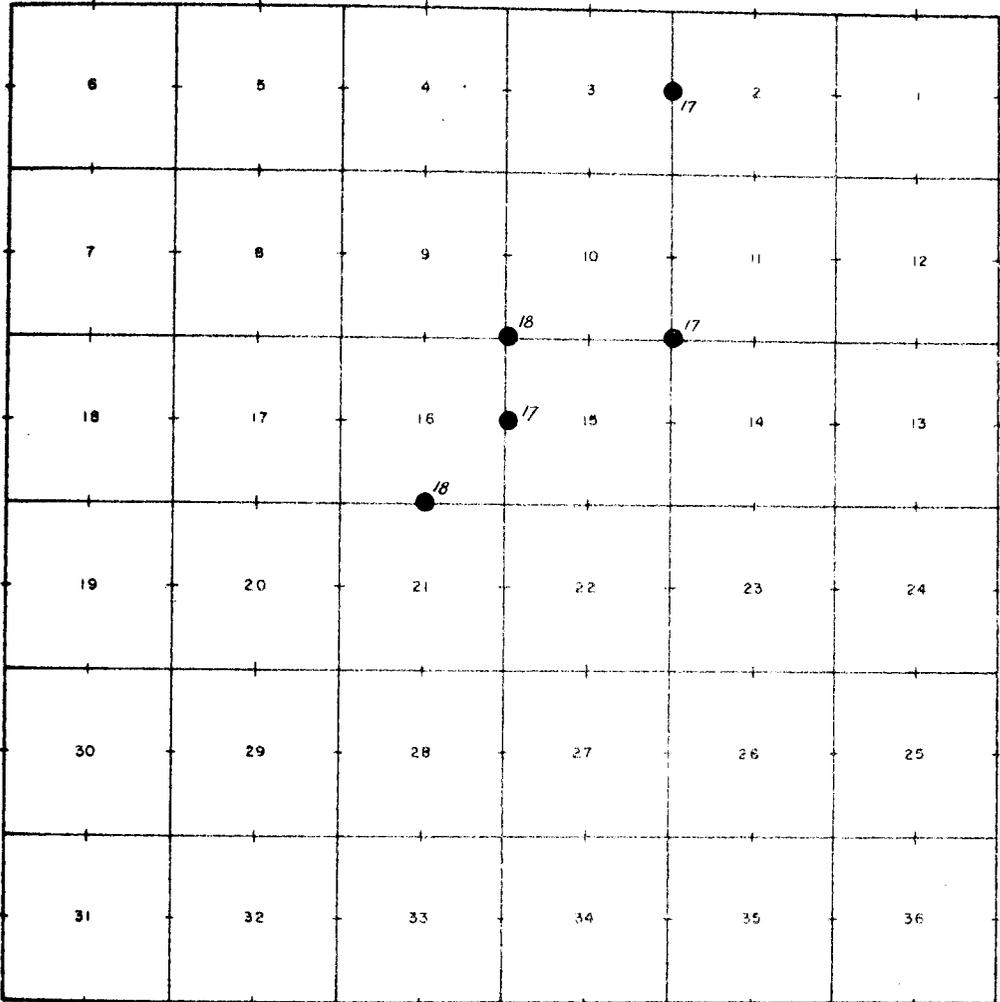

CORNER REMONUMENTATION INDEX DIAGRAM

Township _____ Range _____ Meridian _____

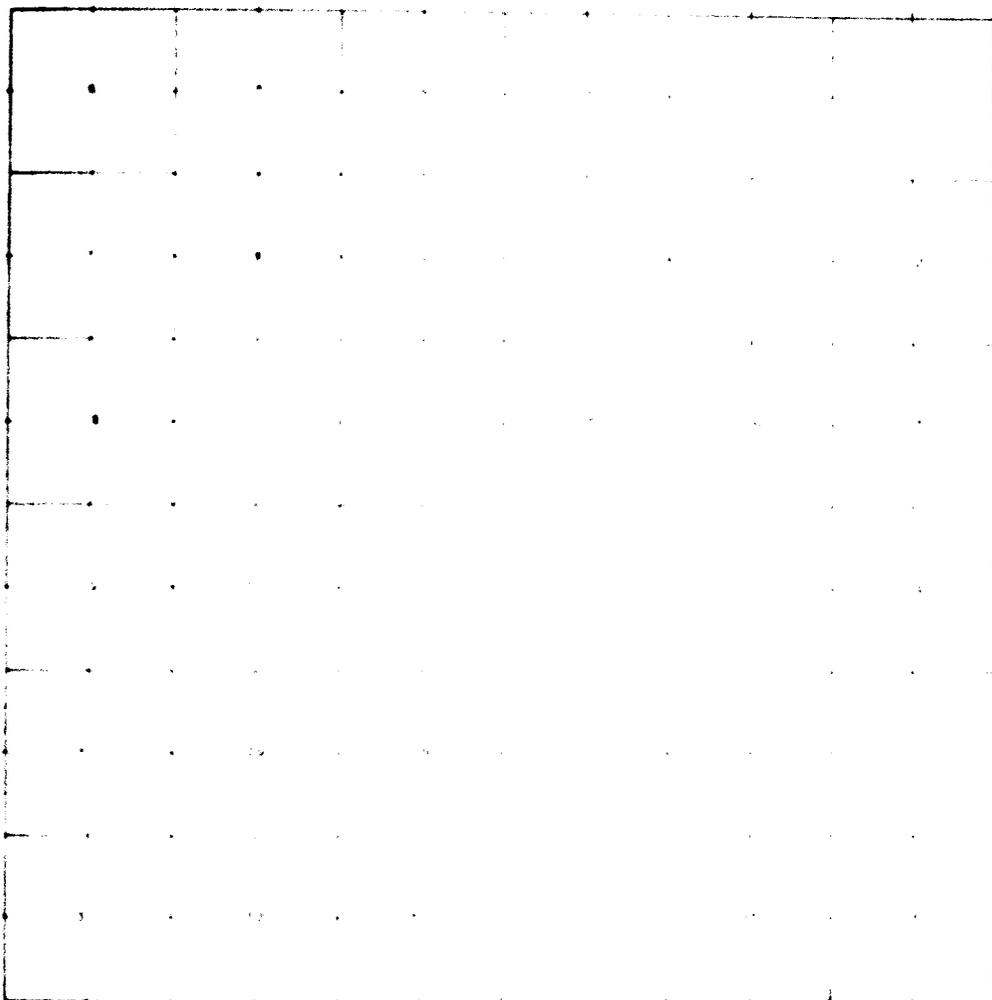

Remonumentation of Corners in T. 35 S., R. 6 W.

Chains

The following field notes are those of the remonumentation of certain identified original corners selected by the Forest Service as being adjacent to, or controlling the boundaries of Forest Service Lands, in the following townships, all situated within the Dixie National Forest:

- Tps. 35 S., Rs. 6, 7 and 8 W., S.L.M., Utah
- Tps. 36 S., Rs. 7, 8 and 9 W., S.L.M., Utah
- Tps. 37 S., Rs. 6, 7 and 9 W., S.L.M., Utah
- Tps. 37 S., Rs. 14, 15 and 16 W., S.L.M., Utah
- Tps. 38 S., Rs. 15 and 16 W., S.L.M., Utah

The position of each remonumented corner was mkd. by the original monument, or determined from corner accessories as recorded in the original survey record. The remonumentation was requested by and accomplished in cooperation with the Forest Service.

T. 35 S., R. 6 W.

The survey of the N. and W. boundaries, and all the subdivisions of T. 35 S., R. 6 W., S.L.M. were executed by Bailey & Burrill, in 1874. The S. bdy. or the 7th Standard Parallel South was surveyed by T. C. Bailey in 1874.

At the 1/4 sec. cor. of secs. 16 and 17, which is mkd. by a volcanic stone, 19x10x7 ins., firmly set, mkd. 1/4 on W. face; witnessed by few scattered stones.

At cor. point

Set an iron post, 30 ins. long, 2 1/4 ins. diam., 24 ins. in the ground, over broken glass, original cor. buried on E. side of post; brass cap mkd.



Raise a small mound of stone, around cor.

Cor. is located on a small rise, 85 lks. N. of wire fence bearing about W. and NE., and N. 1.85 chs. dist. of oiled road, between Panguitch, and Panguitch Lake.

At the cor. of secs. 8, 9, 16 and 17, which is mkd. by a volcanic stone, 22x10x10 ins., loosely set, mkd. with 4 notches on S. and E. edges; witnessed by a small mound of stone, on the W., and 3 original bearing trees. No remaining evidence of the NW. tree.

- A dead pinon, 24 ins. diam., bears N. 24° E., 55 lks. dist., dim illegible scribe marks, (record N. 27 1/2° E., 58 lks.)
- A pinon, 16 ins. diam., bears S. 64° E., 141 lks. dist., marks nearly overgrown, (record S. 63° E., 145 lks.)
- A cedar, 22 ins. diam., bears S. 35 1/2° W., 232 lks. dist., mkd. S17 BT. (Record dist. 230)

At cor. point

Set an iron post, 30 ins. long, 2 1/4 ins. diam., 8 ins. in the ground to rock, original cor. set alongside of post; brass cap mkd.

Remonumentation of Corners in T. 35 S., R. 6 W.

Chains

| | |
|------|-----|
| T35S | R6W |
| S 8 | S 9 |
| S17 | S16 |
| 1961 | |

Raise a large mound of stone to top, around cor.

Cor. is located on medium steep NW. slope, about 6 chs. dist. S. of a wire fence.

At the cor. of secs. 4, 5, 8 and 9, which is mkd. by a volcanic stone, 24x13x8 ins., loosely set in a small mound of stone, marked with 5 notches on S. and 4 notches on E. edge; no other accessories.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground with original cor. set along E. side of post; brass cap mkd.

| | |
|------|-----|
| T35S | R6W |
| S 5 | S 4 |
| S 8 | S 9 |
| 1961 | |

Place collar of rock around post, and raise a mound of stone, 3x2 ft. W. of cor.

Cor. is located on a gentle SE. slope, about 6 chs. S. of track road bearing about W. and NE.

At the ¼ sec. cor. of secs. 19 and 20, which is mkd. by a volcanic stone, 13x11x11 ins., firmly set, mkd. ¼ on W. face; witnessed by stump of original bearing tree.

A yellow pine stump 4 ft. high, 24 ins. diam., bears S. 8° W., 288 lks. dist., mkd. ¼ S.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground over broken glass, original cor. buried on N. side of post; brass cap mkd.

| | |
|------|-----|
| ¼ | |
| S19 | S20 |
| T35S | R6W |
| 1961 | |

Raise a small mound of stone, around cor. No trees available.

Cor. is located on a gentle N. slope, in sagebrush, about 8 chs. S. of oiled road to Panguitch Lake.

T. 35 S., R. 7 W.

The survey of the N. and W. boundaries, resurvey of E. bdy., the survey of all the subdivisions of T. 35 S., R. 7 W., S.L.M., was executed by Shadrack M. Richardson, D. S., in 1884. The S. bdy. of the Seventh Standard Parallel South, was surveyed by A. J. Stewart, Jr., in 1883.

At the ¼ sec. cor. of secs. 34 and 35, which is mkd. by a volcanic stone, 25x9x7 ins., mkd. ¼ on one face, lying on the ground with old cedar post alongside; no accessories.

Chains

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with original cor. buried on E. side of post; brass cap mkd.

| | |
|------|-----|
| S34 | S35 |
| T35S | R7W |
| 1961 | |

Raise a mound of stone, around cor.

Cor. is located on nearly level meadow pasture, N. 1.40 chs. dist. of wire fence bearing nearly E. and W., and 16 lks. easterly of 2 wire telephone line, bears NE. and SW. Panguitch Creek is N. of cor. about ¼ mile.

At the cor. of secs. 26, 27, 34 and 35, which is mkd. by a volcanic stone, 20x11x10 ins., mkd. with 1 notch on S. and 2 notches on E. edge; loosely set in ground and in small mound of stone at N. base of cor. cedar fence post.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with original cor. buried on NE. side of post; brass cap mkd.

| | |
|------|-----|
| T35S | R7W |
| S27 | S26 |
| S34 | S35 |
| 1961 | |

Raise a mound of stone, around post, and W. of cor.

Cor. is located on medium steep SW. slope, at cor. of old wire fences bearing N. and W.

At the S.C. of secs. 31 and 32, on S. bdy. of Tp., which is mkd. by a limestone, 15x10x8 ins., loosely set in ground, mkd. 1 groove on W., 5 grooves on E., and S.C. on S face; witnessed by a small mound of stone on the W., and 1 old bearing tree.

A yellow pine, 36 ins. diam., bears N. 61° W., 120 lks. dist. mkd. T35S R7W S31 BT., (this tree not recorded in record).

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with original cor. buried on E. side of post; brass cap mkd.

| | |
|------|-----|
| SC | |
| T35S | R7W |
| S31 | S32 |
| 1961 | |

from which I mark

A yellow pine, 10 ins. diam., bears N. 32° E., 70½° lks. dist., mkd. T35S R7W S32 BT.

Cor. is located on a N. slope, 25 lks. S. of small ravine draining E., and about 6 chs. W. of road bearing about N. and S., along W. side of Panguitch Lake.

Chains

At the $\frac{1}{4}$ sec. cor. of secs. 31 and 32, which is mkd. by volcanic stone, loosely set in small mound of stone, mkd. $\frac{1}{4}$ on W. side; witnessed by 1 dead bearing tree.

A pinon (dead) 10 ins. diam., bears S. 9° W., 15 lks. dist., mkd. $\frac{1}{4}$ S. BT, (record bearing S 5° W.).

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with original cor. buried on W. side of post; brass cap mkd.

*
T35S | R7W
S31 | S32
1961

from which I mark

A pinon, 24 ins. diam., bears N. 50° E., 52 lks. dist., mkd. $\frac{1}{4}$ S32 BT.

A red cedar, 20 ins. diam., bears S. 74° W., 51 lks. dist., mkd. $\frac{1}{4}$ S31 BT.

And raise a mound of stone, around cor.

Cor. is located on very steep S. slope, 50 lks. W. of small ravine, drains S. and about 8 chs. N. of road.

T. 35 S., R. 8 W.

The survey of E. portion of the subdivisions, and resurvey of E. boundary of T. 35 S., R. 8 W., S.L.M., was executed by R.E.L. Collier D.S., in 1895. The S. bdy. or Seventh Standard Parallel South, was surveyed by A.J. Stewart, Jr. in 1883. The W. portion of the subdivisions was surveyed by M.H. Dalley, in 1908.

At the cor. of secs. 25, 26, 35 and 36 which is mkd. by a volcanic stone, 18x8x7 ins., firmly set, mkd. with 1 notch on S. and E. edges witnessed by a scattered mound of stone and 1 remaining bearing tree in sec. 26. No evidence found of the other bearing trees.

A spruce, 15 ins. diam., bears N. 60° W., 34 lks. dist., marks partly overgrown, visible T35S R-W S26.

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 8 ins. in the ground to solid rock, original cor. set on N. side of post, and supported in a large mound of stone to top; brass cap mkd.

T35S | R8W
S26 | S25
S35 | S36
1961

from which I mark

A spruce, 16 ins. diam., bears S. 57° E., $47\frac{1}{2}$ lks. dist., mkd. T35S R8W S36 BT.

A yellow pine, 9 ins. diam., bears S. 63° W., 26 lks. dist., mkd. T35S R8W S35 BT.

Cor. is located on a N. slope, 10 lks. E. of cor. of log fence bearing N., and wire fences bearing E. and S., and about 7 chs. S. of Clear Creek, drains SE.

Location of Corners in T. 36 S. R. 7 W.

Chains

Cor. is located on a N. slope, 10 lks. E. of cor. of log fence bearing N., and wire fences bearing E. and S., and about 7 chs. S. of Clear Creek, drains SE.

T. 36 S., R. 7 W.

The survey of S., E. and W. boundaries and the subdivisions of T. 36 S., R. 7 W., S.L.M., was executed by Shadrack M. Richardson, D.S., in 1884. The N. bdy. or Seventh Standard Parallel South, was surveyed by A. J. Stewart, Jr., in 1874.

At the cor. of secs. 25, 30, 31 and 36, on E. bdy. of Tp., which is mkd. by a limestone, 15x12x8 ins., firmly set, mkd. with 1 notch on S. and 5 notches on N. edge; witnessed by 2 live bearing trees and the stumps of remaining trees.

- A yellow pine, 35 ins. diam., bears S. 7° E., 140 lks. dist., marks nearly overgrown.
- A yellow pine, 26 ins. diam., bears S. 45° W., 207 lks. dist., blazed, marks overgrown.
- Rotted stump, 10 in. diam., bears N. 25° E., 87 lks. dist., no marks remaining.
- Rotted stump, 14 ins. diam.; bears N. 47° W., 170 lks. dist., no marks remaining.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with original cor. buried on E. side of post; brass cap mkd.

T36S
R7W | R6W
S25 | S30
S36 | S31
1961

Place collar of rock around cor.

Cor. is located at E. base of cor. cedar fence post, wire fences bearing S. and W., and about 4 chs. dist. SE. of troughs at Miller Seep (now dry).

At the cor. of secs. 32 and 33, on S. bdy. of Tp., which is mkd. by a limestone, 15x10x3 ins., set in a small mound of stone, no marks on stone could be identified; witnessed as follows.

- A cedar, 14 ins. diam., bears N. 60° E., 39½ lks. dist., showing old blaze with illegible scribe marks, (record N. 15° E., 10 lks.)
- A cedar, 16 ins. diam., bears N. 50° W., 56 lks. dist., showing old blaze, marks have been defaced, (record N. 80° W., 55 lks.)
- A yellow pine, 22 ins. diam., bears S. 40° W., 46½ lks. dist., showing old blaze, appears not ever having been marked, (record S. 35° W., 50 lks.)

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in ground to bedrock, and supported in a mound of stone to top; brass cap mkd.

Remonumentation of Corners in T. 36 S., R. 7 W.

Chains

T36N | R7W
S32 | S33
T37SR7W
1961

Cor. is located on a steep S. slope, about 1/4 mile N. of Mammoth Cr.

Note: The C.C. of secs. 4 and 5, T. 37 S., R. 7 W., bears W. 72 lks. dist.

At the cor. of secs. 19 and 30, on the W. bdy. of Tp., which is mkd. by a volcanic stone, 12x12x10 ins., loosely set in the ground, marked 2 notches on S. and 4 notches on N. edge; witnessed as follows:

- An aspen, 14 ins. diam., bears S. 35° E., 206 lks. dist., mkd. in bark, too distorted to be legible, (record dist. 210 lks.)
- An aspen, 10 ins. diam., bears S. 30° W., 92 lks. dist., mkd. in bark, T36S R8W, (record dist. 104 lks. dist.)
- An aspen, 12 ins. diam., bears N. 21° W., 133 lks. dist., mkd. in bark, illegible, (record N. 24° W., 115 lks.)

No evidence of the NE. bearing tree.

At cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 12 ins. in the ground to rock, original cor. set along N. side of post; brass cap mkd.

T36S
S25 | S19
R8W | S30
R7W
1961

Raise a large mound of stone, around cor.

I mark

A yellow pine, 12 ins. diam., bears N. 56° E., 48 lks. dist., mkd. T36S R7W S19 BT.

Cor. is located on gentle S. slope in medium dense timber, area E. has been logged.

At the cor. of secs. 4, 5, 8 and 9 which is mkd. by a limestone, firmly set, mkd. with 5 notches on S. and 4 notches on E. edge; witnessed by few scattered rock, and 1 bearing tree. There is no remaining evidence of the other 3 aspen bearing trees.

A dead aspen, 10 ins. diam., bears S. 50° E., 154 lks. dist., showing illegible scribe marks, (record dist. 160 lks.)

At cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with original cor. buried on E. side of post; brass cap mdd.

T36S | R7W
S 5 | S 4
S 8 | S 9
1961

Continuation of Corners in T. 36 S. R. 7 W.

Chains

Place collar of rock around cor. No other accessories available.

Corner is located on a gentle N. slope, S. 6.40 chs. dist. of main road bearing nearly E. and W. along S. side of Panguitch Lake.

At the $\frac{1}{4}$ sec. cor. of secs. 4 and 9, mkd. by a limestone, 21x14x2' ins., mkd. $\frac{1}{4}$ on N. face, loosely set in circle of deeply embedded rock. There is no remaining evidence of the original bearing trees.

At cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, original cor. buried on N. side of post; brass cap mkd.

$$\begin{array}{r} \text{T36SR7W} \\ \frac{1}{4} \frac{\text{S } 4}{\text{S } 9} \\ 1961 \end{array}$$

Raise a mound of stone, around cor.

Cor. is located in S. edge of grassy bottom land in valley, about $\frac{1}{2}$ ch. S. of small drain, course E.

At the cor. of secs. 17, 18, 19 and 20, which is mkd. by a volcanic stone, 18x11x7 ins., loosely set in a small mound of stone, mkd. 3 notches on S. and 5 notches on E. edge; from which original bearing trees.

An aspen, (dead) 18 ins. diam., bears S. 34° E., 72 lks. dist. mkd. in the bark, can make out T36S S20.

An aspen, 13 ins. diam., bears N. 85° E., 45 lks. dist., mkd. in bark, T36 BT, (only legible marks).

At cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 20 ins. in the ground to rock, original cor. buried on N. side of post; brass cap mkd.

$$\begin{array}{r} \text{T36S } | \text{R7W} \\ \hline \text{S18 } | \text{S17} \\ \hline \text{S19 } | \text{S20} \\ 1961 \end{array}$$

Raise a large mound of stone, around cor.

Cor. is located on nearly level ground, at W. edge aspen grove, about 7 chs. E. of graveled road, bearing N. and S.

At the $\frac{1}{4}$ sec. cor. of secs. 17 and 18, which is mkd. by a volcanic stone, 19x10x9 ins., mkd. $\frac{1}{4}$, found lying on ground at base of cedar post at cor. of wire fences bearing N. and W., and witnessed by a mound of stone, NW. of cor.

At cor. point, at SE. edge of fence post.

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 20 ins. in the ground to rock, original cor. set on E. side of post, and glass deposit; brass cap mkd.

Remonumentation of Corners in T. 36 S., R. 7 W.

Chains

$\frac{1}{2}$
 T36S | R7W
 S18 | S17
 1961

Place collar of rock around cor., and rebuild mound of stone, NW. of cor.

Cor. is located on nearly level ground in Blue Spring Valley, at cor. of fences, and 120 lks. S. of center of gate and road bearing E. to main N. and S. road.

At the $\frac{1}{2}$ sec. cor. of secs. 7 and 8, which is mkd. by a white limestone, 17x10x6 ins., firmly set, mkd. $\frac{1}{2}$ on N. side, witnessed by 1 original bearing tree in sec. 7. No remaining evidence of other trees.

A yellow pine, 42 ins. diam., bears S. 53° W., 18 lks. dist., mkd. $\frac{1}{2}$ S BT. (Record S. 40° W., 10 lks. dist.)

At cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with original cor. buried on N. side of post; brass cap mkd.

$\frac{1}{2}$
 T36S | R7W
 S 7 | S 8
 1961

from which I mark

A yellow pine, 9 ins. diam., bears S. 58° E., 57 lks. dist., mkd. $\frac{1}{2}$ S8 BT.

Cor. is located on a N. slope, in scattered timber.

At the closing cor. of secs. 5 and 6, on the N. bdy. of Tp. (Seventh Standard Parallel South) mkd. by a volcanic stone, 23x11x7 ins., firmly set, mkd. CC on S. face, unable to identify any other marks; witnessed by a small mound of stone around cor.

At cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with original cor. buried on S. side of post; brass cap mkd.

T35SR7W
 S 32
 S6 | S5
 T36S | R7W
 CC
 1961

Raise a mound of stone, around cor.

Cor. is located 8 lks. S. of E-W wire fence, in meadow, and E. 96 lks. dist. of 2 wire power line, bearing about NW. and SE.

Chains

T. 36 S., R. 8 W.

The survey of the subdivisions of T. 36 S., R. 8 W., was executed by Jenkins & West, D.S., in 1898.

At the closing cor. of secs. 24 and 25, on E. bdy. of Tp., which is mkd. by a volcanic stone, 21x12x7 ins., firmly set, mkd. with 2 notches on S. and 4 notches on N. edge, (no CC found on stone) with by 2 original bearing trees.

An aspen, 9 ins. diam., bears S. 61° W., 32 lks. dist., mkd. in bark T36SR8WS25BT, (record S. 40° W., 33 lks.)

An aspen, 7 ins. diam., bears N. 20° W., 25 lks. dist., mkd. in bark T36SR8WS24BT, (record N. 40° W., 27 lks.)

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground to rock, original cor. set along E. side of post, and supported in a large mound of stone to top; brass cap mkd.

| | |
|------|-----|
| T36S | |
| S24 | S19 |
| S25 | R7W |
| R8W | |
| 1961 | |

from which I mark

A yellow pine, 10 ins. diam., bears N. 40° W., 8 lks. dist., mkd. only S24 BT.

A yellow pine, 12 ins. diam., bears S. 58° W., 30½ lks. dist., mkd. T36S R8W S25 BT.

Note: The original record shows this CC as being N. 1° 15' E., 4.39 chs. dist. from the cor. of secs. 19 and 30, on W. bdy. T. 36 S., R. 7 W. I measure dist. to be 4.41 chs. dist.

T. 36 S., R. 9 W.

The survey of the N. and E. portions of the subdivisions, the survey of east bdy. of T. 36 S., R. 9 W., S.L.M., were executed by Jenkins & West, in 1897. M.H. Dalley, D.S., completed the subdivisions in 1910.

At the cor. of secs. 25 and 36, on E. bdy. of Tp., which is mkd. by a volcanic stone, 17x11x10 ins., firmly set, mkd. with 1 notch on S. and 5 notches on N. edge; witnessed by a small mound of stone, around cor.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with original cor. buried on E. side of post; brass cap mkd.

| | |
|------|------|
| T36S | |
| S25 | T36S |
| S36 | R8W |
| R9W | S31 |
| 1961 | |

Raise a mound of stone, around cor.

Cor. is located on slight SE. slope in open grassy park, 3 chs. N. of ravine, drains E.

Remonumentation of Corners in T. 36 S., R. 9 W.

Chains

At the 1/4 sec. cor. of secs. 25 and 36, which is mkd. by a volcanic stone, 14x14x3 ins., firmly set, mkd. 1/4 on N. face; witnessed by original bearing trees.

- A balsam, 16 ins. diam., bears S. 1° 45' E., 68 lks. dist., blazed, marks overgrown.
- A balsam, 18 ins. diam., bears N. 45° 45' W., 64 lks. dist., marks overgrown.

At cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground with original cor. buried on N. side of post; brass cap mkd.

T36SR9W
 1/4 $\frac{S 25}{S 36}$
 1961

Raise a mound of stone, around cor.

Cor. is located at N. base of cedar post, at cor. of net wire fences marking the boundary of Cedar Breaks National Park, bearing S. and E.

At the 1/4 sec. cor. of secs. 14 and 23, which is mkd. by a volcanic stone, 18x11x9 ins., firmly set, mkd. 1/4 on N. face; witnessed by original bearing tree.

- A spruce, 27 ins. diam., bears S. 87° W., 204 lks. dist., mark overgrown. I remark same 1/4 S23 BT.
- No evidence of the NW. tree.

At cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground with original cor. buried on S. side of post; brass cap mkd.

T36SR9W
 1/4 $\frac{S14}{S23}$

from which I mark

A spruce, 20 ins. diam., bears N. 24° W., 66 lks. dist., mkd. 1/4 S14 BT.

Raise a mound of stone, around cor.

Cor. is located on gentle NE. slope, 1 ch. W. of small ravine, drain N., and in E-W wire fence, marking the N. boundary of Cedar Breaks National Park.

of Corners T. 37 S., R. 6 W.

Chains

T. 37 S., R. 6 W.

The survey of the N. and W. boundaries of T. 37 S., R. 6 W., S.L.M., was executed by A. J. Stewart, Jr., in 1883. The subdivisions were surveyed by Shadrack M. Richardson in 1884. The W. boundary was resurveyed by R.E.L. Collier, in 1895.

At the 1/4 sec. cor. on W. bdy. sec. 6, T. 37 S., R. 6 W., which is mkd by a sandstone, 18x12x6 ins., mkd. 1/4, found lying on the ground at base of cedar post, at cor. of fences bearing N., S., E. and W.; no accessories.

At cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, over broken glass, and original cor. buried on E. side of post; brass cap mkd:

T37S
R7W | R6W
1/4
S6
1961

Place collar of rock around cor. No other accessories available.

Cor. is located at cor. of wire fences, bears N-S and E-W, and 15 lks. S. of small drain, course SW.

At the cor. of Tps. 36 and 37 S., Rs. 6 and 7 W., which is mkd. by a sandstone, 21x8x7 ins., mkd. with 6 grooves on 4 sides, found lying on the ground at base of N. gate post, in N. and S. wire fence; unwitnessed. All bearing trees have been destroyed.

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over broken glass, with original cor. buried on W. side of post; brass cap mkd.

T36S
R7W | R6W
S36 | S31
S 1 | S 6
T37S
1961

Raise a mound of stone, around cor.

Cor. is located on gentle SW. slope, 15 lks. N. of dim road, bears NE. and SW.

At the 1/4 sec. cor. of secs. 5 and 8, which is mkd. by a limestone, 16x10x8 ins., broken in two pieces, mkd. 1/4, found lying on the ground, at base of old cedar post, 6 ins. diam., firmly set; witnessed by 1 original bearing tree. No evidence found of other tree.

A yellow pine, 24 ins. diam., bears N. 51° E., 55 lks. dist., blazed, showing dim illegible scribe marks. (Record N. 78° E., 30 lks.)

At cor. point

Remonumentation of Corners in T. 37 S., R. 7 W.

Chains

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground over broken glass, original cor. buried on N. side of post; brass cap mkd.

T37SR6W
S 5
S 8
1961

from which I mark

A yellow pine, 8 ins. diam., bears S. 20° E., 22 lks. dist., mkd. ¼ S8 BT.

Raise a mound of stone, around cor.

Cor. is located on slight S. slope, about 3 chs. N. of graveled road along Mammoth Creek, bears N. 70° E. and S. 70° W.

T. 37 S., R. 7 W.

The survey of portion of the subdivisions, and the resurvey of E. boundary of T. 37 S., R. 7 W., S.L.M., were executed by R.E.L. Collier, in 1895. The survey of the N. boundary was surveyed by Shadrack M. Richardson, in 1884.

At the ¼ sec. cor. of secs. 4 and 5, which is reestablished at its original position (corner stone missing) from the 2 original bearing trees. From reestablished point.

A yellow pine, 47 ins. diam., bears East, 50 lks. dist., old blaze has been opened, shows illegible scribe marks.
A yellow pine, 30 ins. diam., bears N. 70° W., 146 lks. dist. old blaze has been opened, showing ¼ S BT.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 26 ins. in the ground over broken glass deposit; brass cap mkd.

½
S5 | S4
T37S | R7W
1961

Cor. is located at W. base of cedar post, at cor. of pole fences bearing N. and E., about N. 20° E., 64 lks. dist. from NE. cor. of old frame cabin: In bottom land along Tommy Creek.

At the closing cor. of secs. 4 and 5, on the N. bdy. of Tp., which is mkd. by a limestone, 15x12x5 ins., broken, top part mkd. with CC on one face, 4 notches on one edge and 2 notches on opposite edge, set in a small mound of stone; witnessed by the 2 original bearing trees.

A yellow pine (dead), 22 ins. diam., bears S. 45° E., 58 lks. dist., mkd. T37S R7W S4 BT. (Record S. 43° E.)
A fir, 21 ins. diam., bears S. 12° W., 53 lks. dist., mkd. T37S R7W S5 BT. (Record S. 12° W., 56 lks.)

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground with original cor. buried on S. side of post; brass cap mkd.

Chains

T36SR7W
S32
 S5 | S4
 T37S | R7W
 CC
 1961

Raise a mound of stone, around cor.

Note: I found this closing cor. to be W. 72 lks. dist. of the cor. of secs. 32 and 33, on S. bdy. T. 36 S., R. 7 W. The record shows the closing cor. as being E. 71 lks. dist. of the cor. of secs. 32 and 33.

Cor. is located on a steep S. slope, about $\frac{1}{2}$ mile N. of Mammoth Creek.

T. 37 S., R. 9 W.

The survey of the subdivisions of T. 37 S., R. 9 W., S.L.M., were executed by Mahew H. Dalley, D.S. in 1910.

At the cor. of secs. 10, 11, 14, and 15, which is mkd. by a volcanic rock, 17x16x9 ins., firmly set, mkd. with 4 grooves on S. and 2 grooves on E. face; witnessed by few scattered rock.

At cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with original cor. buried on S. side of post; brass cap mkd.

T37S | R9W
S10 | S11
 S15 | S14
 1961

Place collar of rock around post and raise a mound of stone, 2x2 ft. W. of cor.

Cor. is located on a gradual E. slope, in open park, about 6 chs. dist. W. of oiled road to Cedar Breaks Lodge, bearing NW. and SE., and about $\frac{1}{2}$ mile S. of the S. bdy. of Cedar Breaks National Park.

T. 37 S., R. 14 W.

The survey of the N., S. and W. boundaries, and portions of the subdivisions of T. 37 S., R. 14 W., S.L.M., Utah, were executed by A. J. Stewart, Jr., D. S. in 1873. The completion survey of the subdivisions were executed by Andrew Nelson in 1939.

At the cor. of secs. 15, 16, 21 and 22 which is mkd. by a sandstone, 17x16x8 ins., firmly set, marked with 3 notches on S. and E. edges; alongside of which is a cedar post, 8 ins. diam., firmly set, There is no remaining evidence of the original bearing trees. The land surrounding the corner has been cleared.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with original cor. buried on the S. side of post; brass cap mkd.

Remonumentation of Corners in T. 37 S., R. 14 W.

Chains

| | |
|------|------|
| T37S | R14W |
| S16 | S15 |
| S21 | S22 |
| 1961 | |

Place collar of rock around post.

Cor. is on slight NW. exposure, about N. 30° E., 35 chs. dist. from buildings at Old Pages Ranch, and about 2½ chs. S. of power line, bearing NE. and SW.

At the cor. of secs. 16, 17, 20 and 21, which is marked by a volcanic stone, 16x10x10 ins., loosely set in a small mound of stone, under N-S wire fence, marked with 3 notches on S., and 4 notches on E. edge; witnessed by 3 original bearing trees. NW. tree not found.

A cedar, 8 ins. diam., bears N. 42° E., 29 lks. dist., marked T37S R14 S16, other marks illegible (record dist. 48 lks.)

A cedar, 15 ins. diam., bears S. 35° E., 45 lks. dist., marked T37S R14W S21, (record dist. 46 lks.)

A cedar, 8 ins. diam., bears S. 70° W., 43 lks. dist., marked T37S R W S20, (record bearing S. 77½° W.)

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground with original cor. buried on W. side of post; brass cap mkd.

| | |
|------|------|
| T37S | R14W |
| S17 | S16 |
| S20 | S21 |
| 1961 | |

Raise a mound of stone, around post.

Cor. is located on gentle E. slope in medium dense cedar and pinon timber, in N-S fence line.

T. 37 S., R. 15 W.

The survey of the E. 3 miles of N. boundary was executed by A. J. Stewart, Jr. in 1874. The W. 3 miles of N. bdy., the S., W. and portion of E. bdy., and portion of the subdivisions of T. 37 S., R. 15 W., S.L.M., were surveyed by T. C. Bailey, in 1881. The completion survey of the subdivisions were executed by Andrew Nelson, in 1939.

At the cor. of secs. 2, 3, 34 and 35, on the N. bdy. of Tp., which is mkd. by a volcanic stone, 21x17x9 ins., firmly set, mkd. with 2 notches on E. and 4 notches on W. side; witnessed by a mound of stone 3x2 ft., E. 7 lks. dist., in which find stone mkd. Iron Co. on N., and W. Co. on S. face.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with original cor. buried on W. side of post; brass cap mkd.

| | |
|------|------|
| T36S | R15W |
| S34 | S35 |
| S 3 | S 2 |
| T37S | |
| 1961 | |

Chains

Deposit broken glass at base of post and place collar of rock around. Cor. is located on a gentle SW. slope, about 2 chs. E. of old road, and about 5 chs. E. of Pinto Creek, flows NW.

T. 37 S., R. 16 W.

The N., S., and W. boundaries, and portion of the subdivisions of T. 37 S., R. 16 W., S.L.M., were surveyed by T. C. Bailey, in 1881. The completion survey of the subdivisions and resurvey of portions of the boundaries were executed by R. Gentry and C. L. Heist, in 1911. The N. bdy. was retraced & resurveyed by M. H. Dalley, in 1899.

At the cor. of secs. 1, 2, 35 and 36 on N. bdy. of Tp., which is marked by a sandstone, 20x12x8 ins., firmly set, mkd. with 1 notch on E. and 5 notches on W. side; witnessed by a small scattered mound of stone around cor.

At cor. point.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with original cor. buried on S. side of post; brass cap mkd.

| | | |
|------|--|------|
| T36S | | R16W |
| S35 | | S36 |
| S 2 | | S 1 |
| T37S | | |
| 1961 | | |

Raise a mound of stone, around cor.

Corner is located on gentle W. slope in valley, on S. side of E-W wire fence.

At the ¼ sec. cor. of secs. 14 and 15, which is mkd. by a volcanic stone, 15x13x9 ins., loosely set in a small mound of stone, marked ¼ on W. face; no other accessories.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground to solid rock, over broken glass, original cor. set along W. side of post; supported in a large mound of stone to top; brass cap mkd.

| | | |
|------|--|------|
| ¼ | | |
| S15 | | S14 |
| T37S | | R16W |
| 1961 | | |

from which I mark

A cedar, 16 ins. diam., bears S. 78° E., 42 lks. dist.; mkd. ¼ S14 BT.

Corner is located on steep W. slope, about 2 chs. from base of slope, and about 8 chs. E. of Meadow Valley Creek, drains N.

Remonumentation of Corners in T. 37 S., R. 16 W.

Chains

At the cor. of secs. 13 and 24, on E. bdy. of T. 37 S., R. 17 W. which is marked by a volcanic stone, 15x12x5 ins., firmly set, mkd. with 3 notches on N. and S. edges; witnessed by a small mound of stone, W. of cor.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, over broken glass, with original cor. buried on the W. side of post; brass cap mkd.

| | |
|------|------|
| T37S | |
| R17W | R16W |
| S13 | S19 |
| S24 | |
| 1961 | |

Cor. is located on a gradual NW. slope in scattered cedars, 46 lks. N. of E-W wire fence and 34 lks. W. of a 3 wire power line, bears N. and S.

Note: No evidence found of the "1911" closing cor. secs. 18 and 19, T. 37 S., R. 16 W., recorded as being N. 0° 45' W., 1.25 chs. dist.

T. 38 S., R. 15 W.

The survey of the boundaries and portion of the subdivisions of T. 38 S., R. 15 W., S.L.M., were executed by T. C. Bailey, in 1881. The completion survey of the subdivisions, resurvey of the S. and W. boundaries and portion of N. boundary were executed by Hugo Price and E. Bird, in 1918.

At the closing cor. of secs. 2 and 3, on the N. bdy. of Tp., which is marked by a volcanic stone, 14x9x8 ins., firmly set, marked with 2 grooves on E. and 4 grooves on W., and DC on N. face; witnessed by a small mound of stone, around cor., and 1 old bearing tree

A cedar, 16 ins. diam., bears S. 45° E., 224 lks. dist., mkd. BT., (other marks have been axed out).

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground with original cor. buried on S. side of post; brass cap mkd.

| | |
|------|------|
| T37S | |
| S34 | |
| S3 | S2 |
| T38S | R15W |
| CC | |
| 1961 | |

Raise a mound of stone, 4 ft. base, around cor.

Cor. is located on E. slope, 1.90 chs. dist. W. of road between Pine Valley and Pinto, bearing nearly N. and S. Pinto bears N. about ½ mile dist.

T. 38 S., R. 16 W.

The survey of the S. and W. boundaries, the subdivisions, and

Chains

resurvey of E. and N. boundaries of T. 38 S., R. 16 W., S.L.M., were executed by Mahew H. Dalley, in 1988.

At the cor. of secs. 10, 11, 14, and 15, which is marked by a volcanic stone, 19x10x9 ins., firmly set, marked with 4 grooves on S. and 2 grooves on E. face; witnessed by a mound of stone, 3x2 ft., W. of cor.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, over broken glass, original cor. buried on E. side of post; brass cap mkd.

| | |
|------|------|
| T38S | R16W |
| S10 | S11 |
| S15 | S14 |
| 1961 | |

Place collar of rock around post.

Cor. is located on medium steep SE. slope, 3 lks. N. of cor. of wire fences bearing S. and W.

At the ¼ sec. cor. of secs. 2 and 3, mkd. by a granite stone, 17x9x8 ins., mkd. ¼, found lying at base of cedar post, at cor. of fences bearing N., S. and W.; witnessed by a small mound of stone, on the W.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground over broken glass, original cor. buried on W. side of post; brass cap mkd.

| | |
|------|------|
| ¼ | |
| T38S | R16W |
| S 3 | S 2 |
| 1961 | |

Place collar of rock around, and raise a mound of stone, 2x1½ ft., W. of cor.

Cor. is located on gentle S. slope, about 2 chs. S. of top of low hill, and in line with a road from Pinto, which bears W. to State Highway No. 18, between St. George and Enterprise.

At the ¼ sec. cor. of secs. 15 and 16, which is mkd. by a sandstone, 16x12x8 ins., mkd. ¼ found lying at base of cedar post, at cor. of fences bearing N. and E.; no accessories.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground over broken glass; original cor. buried on E. side of post; brass cap mkd.

| | |
|------|------|
| ¼ | |
| T38S | R16W |
| S16 | S15 |
| 1961 | |

from which I mark

Remonumentation of Corners in T. 38 S., R. 16 W.

Chains

A cedar, 15 ins. diam., bears N. 31° W., 224 lks. dist., mkd. $\frac{1}{4}$ S16 BT.

And place collar of rock, around post.

Cor. is located on slight S. slope, at cor. wire fences bearing N. and E., and about $\frac{1}{2}$ mile N. of the MT. Meadow Monument.

At the cor. of secs. 9, 10, 15 and 16 which is mkd. by a white limestone, 12x12x8 ins., mkd. with 4 grooves on one side, and 3 grooves on cornering side, found lying on the ground at base of cedar post, at cor. of fences bearing N., S., E. and W.; no accessories.

At cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, over broken glass, original cor. buried on E. side of post; brass cap mkd.

| | |
|------------|------------|
| T38S | R16W |
| <u>S 9</u> | <u>S10</u> |
| S16 | S15 |
| 1961 | |

from which I mark

A cedar 6 ins. diam., bears N. 76° W., 85 lks. dist., mkd. T38S R16W S9 BT.

And place collar of rock around post.

Cor. is located on gentle SE. slope, 2.20 chs. dist. W. of American Telephone and Telegraph trunk line, bearing nearly N. and S.

At the $\frac{1}{4}$ sec. cor. of secs. 16 and 21, which is mkd. by a volcanic stone, 19x10x9 ins., firmly set, mkd. $\frac{1}{4}$ on N. face, witnessed by a small scattered mound of stone.

At cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground over broken glass, original cor. buried on N. side of post; brass cap mkd.

| | |
|--------------------------|------|
| T38S | R16W |
| $\frac{1}{4}$ <u>S16</u> | |
| S21 | |
| 1961 | |

Place collar of rock around, and raise a mound of stone, N. of cor.

Cor. is located on medium steep W. slope, in E-W wire fence, and about 2 chs. E. of draw draining SE. for 2 chs. to junction with larger draw from W., drains SE.

CERTIFICATE OF CADASTRAL ENGINEER

I, Andrew Nelson, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 15th day of February, 1961, I have surveyed remonumented corners in Townships 35 S., Rs. 6, 7 and 8 W., Tps. 36 S., Rs. 7, 8 and 9 W., Tps. 37 S., Rs. 6, 7 and 9, 14, 15 and 16 W. and Tps. 38 S., Rs. 15 and 16 W.

of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in the specific manner described in the foregoing field notes.

Salt Lake City, Utah
July 5, 1962

Andrew Nelson
Andrew Nelson, Cadastral Surveyor

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT,
Washington, D. C., MAY 1 1963

The foregoing field notes of the survey of remonumentation of corners in Tps. 35 S., Rs. 6, 7 and 8 W., Tps. 36 S., Rs. 7, 8 and 9 W., Tps. 37 S., Rs. 6, 7, 9, 14, 15, and 16 W. and Tps. 38 S., Rs. 15 and 16 W., Salt Lake Meridian, Utah.

executed by Andrew Nelson - Cadastral Surveyor
having been critically examined and found correct, are hereby approved.

E. F. Huntington
Cadastral Engineering Staff Officer
Chief, Division of Engineering

CERTIFICATE OF TRANSCRIPT

I CERTIFY that the foregoing transcript of the field notes of the above-described surveys in is a true copy of the original field notes.

Cadastral Engineering Staff Officer.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

ORIGINAL

296

R570

FIELD NOTES

of the

Remonumentation of Corners in

Township 2 South, Range 7 East (H.E.S. No. 103),

Township 1 South, Range 6 East,

Township 2 North, Range 11 East,

and

Township 3 North, Range 13 East

DEPT. OF THE INTERIOR
BUREAU OF LAND MGMT
REC'D JUL 17 1962 10 00 10

Of the Salt Lake Meridian,

In the State of Utah

EXECUTED BY

Andrew Nelson, Cadastral Surveyor

Under special instructions dated February 15, 1961, which provided for the surveys
included under Group Number 447, approved February 16, 1961,
and assignment instructions dated April 17, 1962.

Survey commenced June 12, 19 62

Survey completed June 19, 19 62


INDEX DIAGRAM

Township _____, Range _____,

| | | | | | |
|----|----|----|----|----|----|
| 6 | 5 | 4 | 3 | 2 | 1 |
| 7 | 8 | 9 | 10 | 11 | 12 |
| 18 | 17 | 16 | 15 | 14 | 13 |
| 19 | 20 | 21 | 22 | 23 | 24 |
| 30 | 29 | 28 | 27 | 26 | 25 |
| 31 | 32 | 33 | 34 | 35 | 36 |

CORNER REMONUMENTATION
INDEX DIAGRAM


Township 2 South, Range 7 East, Salt Lake Meridian

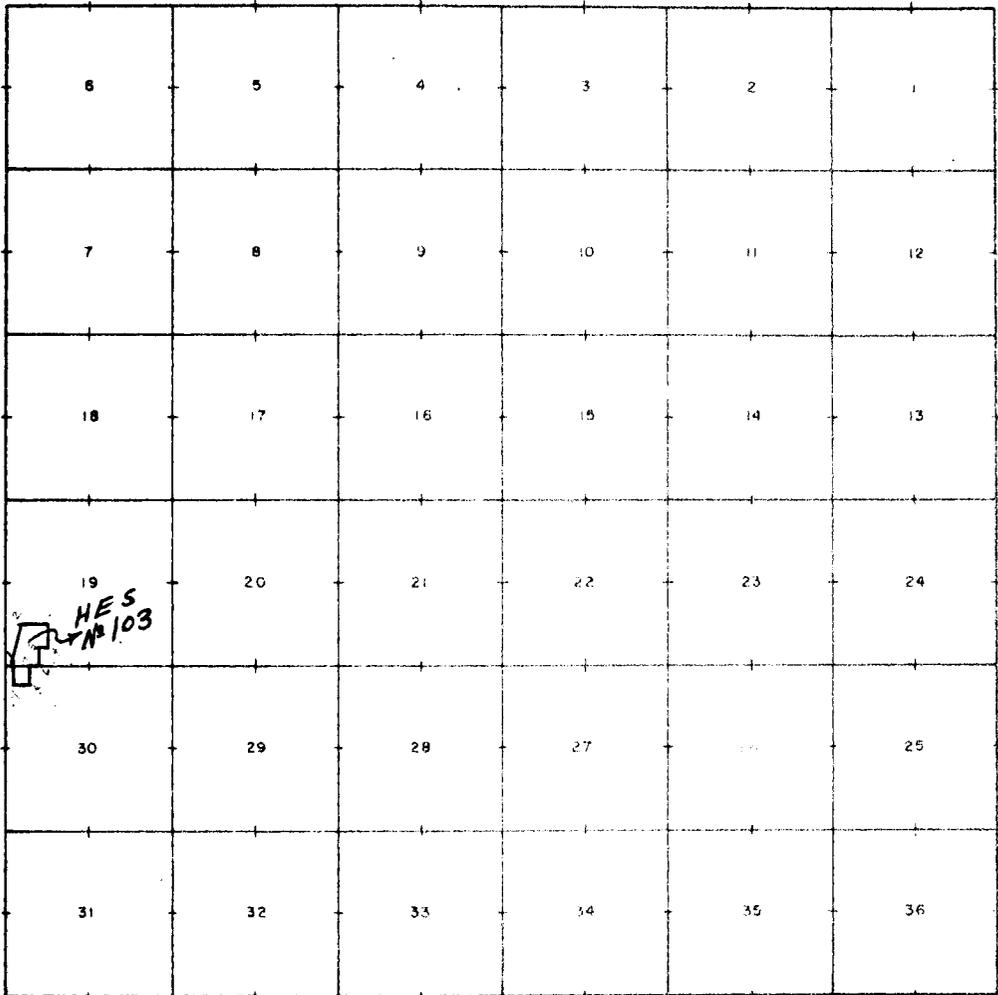

H. E. S. No. 103, in secs. 19 and 30.
All corners remonumented.
Pages 1 to 4.


CORNER REMONUMENTATION
INDEX DIAGRAM

Township 1 South, Range 6 East, Salt Lake Meridian

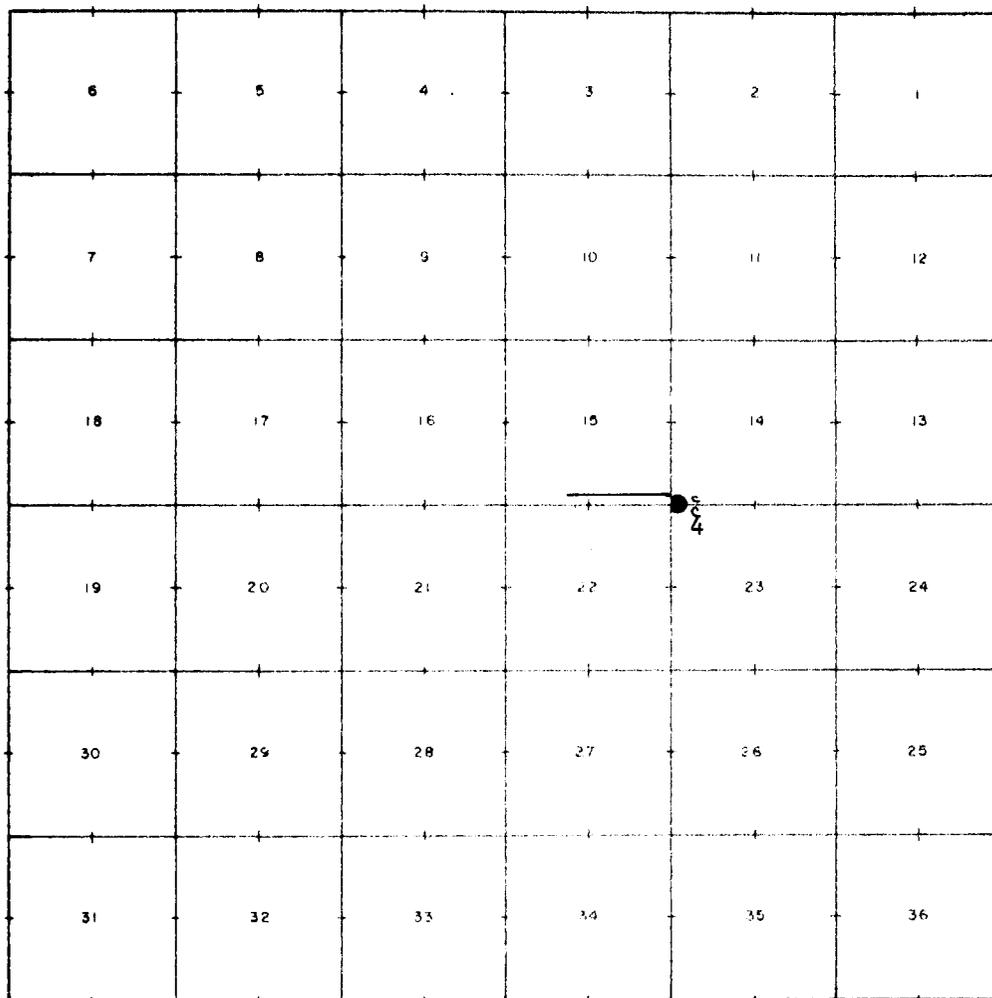


CORNER REMONUMENTATION
INDEX DIAGRAM

Township 2 North, Range 11 East, Salt Lake Meridian

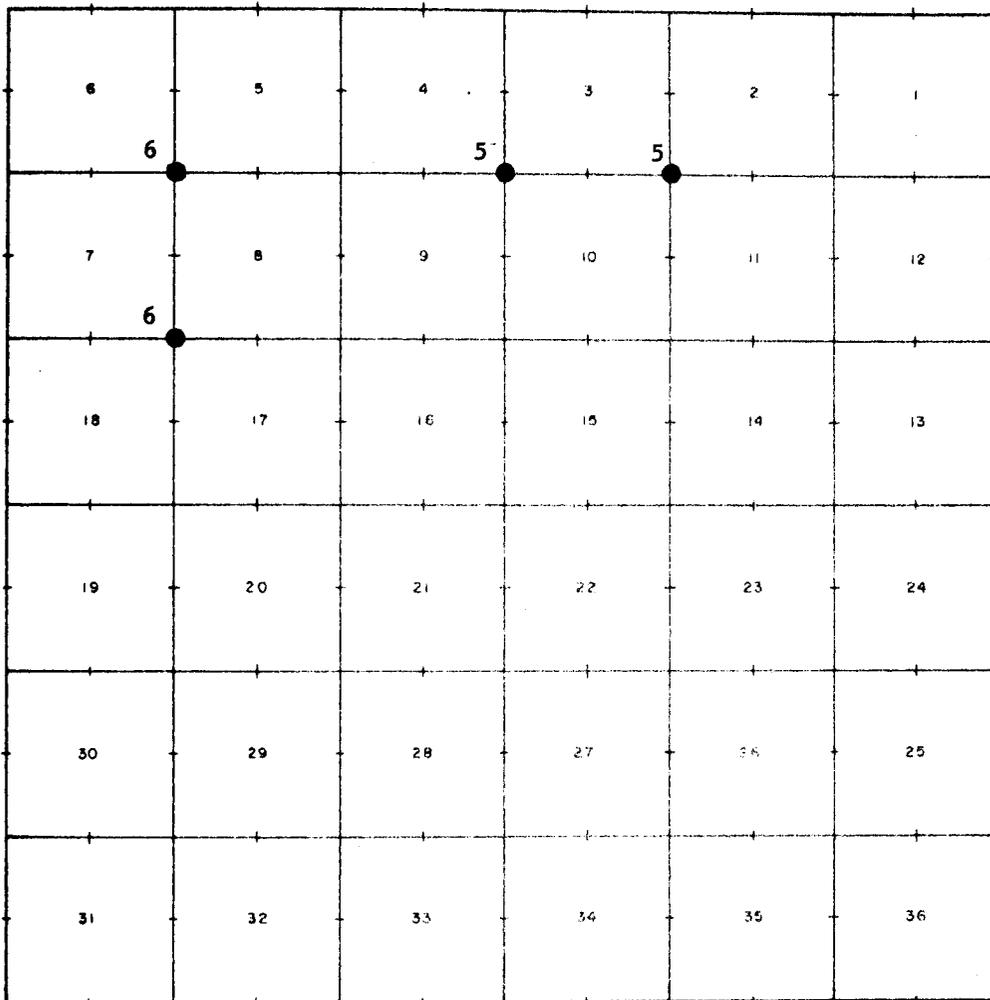

CORNER REMONUMENTATION
INDEX DIAGRAM

Township 3 North, Range 13 East, Salt Lake Meridian

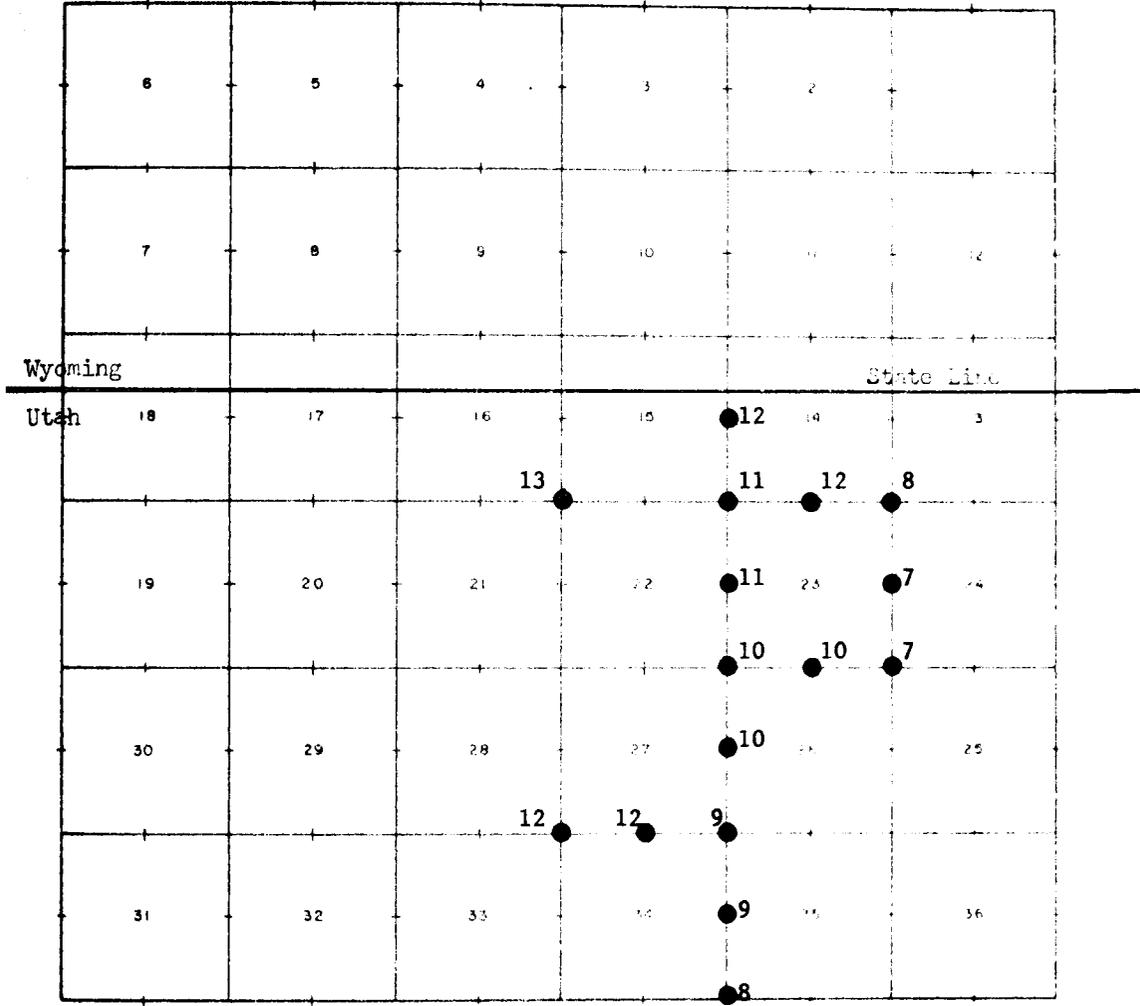

Remonumentation of Corners on H.E.S. No. 103,
in T. 2 S., R. 7 E., SL Mer.

CRADIN

The following field notes are those of the remonumentation of certain identified original corners selected by the U. S. Forest Service as being adjacent to or controlling the boundaries of Forest Service lands, located within the Wasatch National Forest, Utah, in the following townships

H.E.S. No. 103, in T. 2 S., R. 7 E.
T. 1 S., R. 6 E.
T. 2 N., R. 11 E. and
T. 3 N., R. 13 E., all in Salt Lake Mer., Utah

The position of each corner was marked by the original monument or determined from corner accessories recorded in the survey record.

The remonumentation was requested by and accomplished in cooperation with the Forest Service.

H.E.S. No. 103, in T. 2 S., R. 7 E.

Homestead Entry Survey No. 103, located in secs. 19 and 30, T. 2 S., R. 7 E., SL Mer., was surveyed by Oliver Lockhart, Asst. Forest Ranger, in 1915. The S. 3 miles of W. bdy. of T. 2 S., R. 7 E. was originally surveyed by Joseph Gorkinski, Deputy Surveyor, in 1869, and resurveyed by Ralph Gentry, G.L.O. surveyor, in 1931. Gentry also executed the survey of the subdivisions of the Tp. at the same time.

At cor. No. 1, H.E.S. No. 103, which I found to be mkd. by a wood hub, (orig. cor. stone missing) which bears N. 67° 30' E., 0.96 chs. dist. from the cor. of secs. 19, 24, 25 and 30, as established by Gentry, in 1931, and which is mkd. by a G.L.O. iron post, 2 ins. diam., properly set, mkd. and witnessed as described in survey record. Therefore, the hub is in the correct position for cor. as determined by the record tie from sec. cor.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, over broken glass, with brass cap mkd.

HES
1
103
1962

Raise a mound of stone around cor.

Cor. is located in flat, cleared bottom land, about 5 chs. W. of Beaver Creek and S. about 5 chs. dist. of State Highway No. 150, between Kamas and Mirror Lake.


At cor. No. 2, H.E.S. No. 103, which is mkd. by a limestone, 23x15x8 ins., firmly set, mkd. 2 HES 103 on SE. side and witnessed by a mound of stone, 2x1½ ft. SE. of cor.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with orig. cor. buried on S. side of post, with brass cap mkd.

Remonumentation of Corners on HES 103, T. 2 S., R. 7 E., SL Mer.

CHAINS




Place collar of rock around and rebuild the mound of stone SE. of cor.

Cor. is located on steep S. slope in oak brush.

At cor. No. 3, H.E.S. No. 103, which is mkd. by a limestone, 18x13x5 ins., firmly set, mkd. 3 HES 103 on SW. face; no evidence of the two aspen bearing trees, or other accessories found.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with orig. cor. buried on S. side of post, with brass cap mkd.



Raise a mound of stone around cor.


From cor. South 77 lks. dist. is a brass tablet, seated in concrete post, showing 4 ins. above ground, stamped US Federal Works Project Public Road Administration-FH Project No. 34 X RP No-HES 103.

Cor. is located on S. slope in dense chokecherry brush about 2½ chs. N. of State Highway No. 150.

At cor. No. 4, HES No. 103, which is mkd. by a limestone, 28x13x7 ins., firmly set, mkd. 4 HES 103 on side facing claim and witnessed by a scattered mound of stone NW. of cor.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, over a rock, 6x4x4 ins., mkd. X; orig. cor. buried on N. side of post, with brass cap mkd.



from which I mark

A balsam fir, 6 ins. diam., bears S. 50° E., 7 lks. dist., mkd. only BT.

Raise a mound of stone around cor.

Cor. is located on steep N. to NW. slope in dense small aspen and few scattered fir.

At cor. No. 5, HES No. 103, which is mkd. by a limestone, 21x15x5 ins., loosely set in ground and surrounded by a mound of stone, mkd. 5 HES on NW. face.

Remonumentation of Corners, HES 103, T. 2 S., R. 7 E.

CHAINS

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with orig. cor. buried on NE. side of post, with brass cap mkd.

HES 103

5

1962

Raise a mound of stone around cor.

Cor. is located at base of steep NW. slope, in edge of dense brush, about $\frac{1}{2}$ chs. SE. of Beaver Creek at bend; flows from N. to nearly W.

At cor. No. 6, H.E.S. No. 103, which is mkd. by a limestone, 16x13x6 ins. firmly set in ground over a rock mkd. X, mkd. 6 HES 103, on NW. face, and witnessed by few scattered rock.

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, over rock, 6x4x2 ins. mkd. X, and with orig. cor. buried on W. side of post, brass cap mkd.

HES

103

6

1962

Place collar of rock around post.

Cor. is located on W. slope in dense oak and chokecherry brush and small scrub aspen.

At cor. No. 7, H.E.S. No. 103, which is mkd. by a limestone, 24x16x10 ins., broken off at surface of ground; lower part firmly set and top portion properly mkd. No evidence of the 2 aspen bearing trees.

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with mkd. stone buried on W. side of post; brass cap mkd.

HES

103

7

1962

From which I mark

An aspen, 9 ins. diam., bears S. 70° E., 25 $\frac{1}{2}$ lks. dist.; mkd. 7 BT.

Raise a mound of stone around cor.

Cor. is located at base of W. slope.

At cor. No. 8, H.E.S. No. 103, which is marked by a limestone, 16x3 ins., firmly set, mkd. 8 HES 103 on NW. side and witnessed by a small mound of stone NW. of cor.

At cor. point

Remonumentation of Corners, HES 103, T. 2 S., R. 7 E.

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, over broken glass, and rock, 8x6x4 ins., mkd. X, with orig. cor. set on W. side of post, with brass cap mkd.

| | |
|------|--|
| HES | |
| 103 | |
| 8 | |
| 1962 | |

Place collar of rock around cor.

Cor. is located on steep W. slope in dense brush and small scrub aspen.

The cor. monument for cor. No. 9, H.E.S. 103, was found missing; therefore retraced, using orig. bearings and distances from cors. No. 1 and No. 8 at point thus determined, excavated and found the orig. buried memorial, a stone, 6x6x5 ins., mkd. X., 16 ins. below ground.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 26 ins. in the ground, over broken glass and orig. stone mkd. X., with brass cap mkd.

| | |
|------|--|
| HES | |
| 103 | |
| 9 | |
| 1962 | |

Place collar of rock around cor.

The SW. cor. of cabin bears N. 16° E., 105 lks. dist.

Cor. is located on nearly level, cleared land, about 3½ chs. S. and 75 lks. E. of Beaver Creek.

T. 1 S., R. 6 E.

T. 1 S., R. 6 E., SL Mer., is located partly in the Wasatch National Forest; the W. portion of the subdivisions were surveyed by Joseph Gorkinski, Deputy Surveyor, in 1869; the completion survey of the subdivisions were executed by Baxter & Blossom in 1899.

At the closing cor. of secs. 14 and 23, T. 1 S., R. 6 E., which is mkd. by a granite stone, 15x9x6 ins., firmly set and plainly mkd. with 3 grooves on S. and 2 grooves and CC on E. face, witnessed by a small mound of stone S. of cor. Unable to identify any orig. bearing trees.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, orig. cor. buried on N. side of post, with brass cap mkd.

| | |
|------|--|
| T1S | |
| S14 | |
| S23 | |
| R6E | |
| 1962 | |

CHAINS

from which I mark

A fir, 10 ins. diam., bears N. 79° 30' E., 54 lks. dist., mkd. CC S14 BT.

A fir, 14 ins. diam., bears S. 74° E., 44 lks. dist., mkd. CCS23 BT.

Cor. is located on med. steep N. slope in dense timber, about 1 ch. S. of deep draw, drains NW.; a trail road extends along N. side of draw.

Note: Failed to find any trace of the "1869" cor. of secs. 15 and 22, recorded as being N. 60 lks. dist. from the CC.

T. 2 N., R. 11 E.

T. 2 N., R. 11 E., SL Mer., is located within the Wasatch National Forest; the N., S. and E. boundaries, and the subdivisions were surveyed by Bailey and Burrill, Deputy Surveyors, in 1875.

At the cor. of secs. 2, 3, 10 and 11, T. 2 N., R. 11 E., which is mkd. by a sandstone, 27 x15x4 ins., loosely set in a small mound of stone, mkd. with 5 grooves on S. and 2 grooves on E. faces, witnessed by 4 orig. bearing trees in good condition:

A lodgepole pine, 21 ins. diam., bears N. 46° E., 54 lks. dist., mkd. T2N R11E S2 BT (this BT not in orig. record).

A lodgepole pine, 17 ins. diam., bears S. 2° E., 30 lks. dist., mkd. S10 BT

A lodgepole pine, 20 ins. diam., bears S. 80° W., 13 lks. dist., mkd. S10 BT (record S. 75° W., 15 lks.).

A lodgepole pine, 20 ins. diam., bears N. 35° W., 25 lks. dist., mkd. T2N R11E S2 BT (record N. 45° W., 25 lks.).

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground to rock, over broken glass, orig. cor. set on W. side of post, with brass cap mkd.

| | |
|------|------|
| T2N | R11E |
| S3 | S2 |
| S10 | S11 |
| 1962 | |

Raise a large mound of stone around cor.

Cor. is located on a gradual W. slope in med. dense timber; old sawmill site and large slab pile, bears SE. about 1½ chs. dist.; another slab pile, bears W. about 2 chs. dist.

At the cor. of secs. 3, 4, 9 and 10, which is mkd. by a sandstone, 20x18x6 ins., firmly set in the ground, mkd. with 5 notches on S. and 3 notches on E. edge, witnessed by a scattered mound of stone around cor. There is no remaining evidence of the 2 orig. bearing trees.

At cor. point

Remonumentation of Corners in T. 1 S., R. 6 E.

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the over broken glass, orig. cor. buried on E. side of post, with brass cap mkd.

T2N R11E
 S4 | S3
 S9 | S10
 1962

Raise a large mound of stone around cor.

Cor. is located in open swampy park about 3 chs. from S. side and about 2 chs. from W. side; ruins of old log cabins bears N. and NE. 2" to 3 chs. dist.

At the cor. of secs. 7, 8, 17 and 18, which is mkd. by a sandstone, 15x12x8 ins., firmly set, mkd. with 4 grooves on S. and 5 grooves on E. faces, from which stump holes of fallen orig. bearing trees:

Stump hole, at base of 16 in. fallen pine, bears N. 10° W., 18 lks. dist., mks. overgrown or partly burned.

Stump hole, at base of fallen pine, 10 ins. diam., bears S. 30° W., 30 lks. dist., mks. overgrown.

There is no remaining evidence of the other two bearing trees.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, over broken glass, orig. cor. buried on N. side of post, with brass cap mkd.

T2N R11E
 S7 | S8
 S18 | S17
 1962

from which I mark

A pine, 8 ins. diam., bears N. 70° E., 13 lks. dist., mkd. S8 BT.

A pine, 7 ins. diam., bears S. 33° E., 36 lks. dist., mkd. S17 BT.

A pine, 6 ins. diam., bears S. 34° W., 26 lks. dist., mkd. S18 BT.

A pine, 8 ins. diam., bears N. 57° W., 14 lks. dist., mkd. S7 BT.

Raise a mound of stone around cor.

Cor. is located on a gradual W. slope in dense lodgepole pine, about 15 chs. E. of Mill Creek.

At the cor. of secs. 5, 6, 7 and 8, which is mkd. by a sandstone, 15x10x8 ins., firmly set in a mound of stone, mkd. with 5 notches on S. and 5 grooves on E. sides; unable to identify any of the orig. bearing trees; ground covered with dead fallen and rotten trunks.

At cor. point

Remonumentation of Corners in T. 2 N., R. 11 E.

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, over broken glass, orig. cor. buried on W. side of post, with brass cap mkd.

| | |
|------|------|
| T2N | R11E |
| S6 | S5 |
| S7 | S8 |
| 1962 | |

from which I mark

A pine, 6 ins. diam., bears N. 20° E., $28\frac{1}{2}$ lks. dist., mkd. S5 BT.

A pine, 8 ins. diam., bears S. 61° E., 30 lks. dist., mkd. S8 BT.

A pine, 4 ins. diam., bears S. 53° W., $21\frac{1}{2}$ lks. dist., mkd. S7 BT.

A pine, 5 ins. diam., bears N. 78° W., $18\frac{1}{2}$ lks. dist., mkd. S6 BT.

Raise a large mound of stone around cor.

Cor. is located on slight W. slope in dense small lodge-pole pine, about 4 chs. S. of a stream flowing W. and about $\frac{1}{4}$ mile N. of Mill Creek Guard Station of the Forest Service.

T. 3 N., R. 13 E.

T. 3 N., R. 13 E., SL Mer. is located within the Wasatch National Forest; the S. and W. boundaries were resurveyed and the E. bdy. and the subdivisions of the Tp. were surveyed by A. D. Ferron, Deputy Surveyor, in 1881.

At the cor. of secs. 23, 24, 25 and 26, which is mkd. by a quartzite stone, $14 \times 8 \times 4$ ins., firmly set in small circle of rock, mkd. dimly 2 notches on S. and 1 notch on E. edges; no other accessories.

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, over broken glass, orig. cor. buried on E. side of post, with brass cap mkd.

| | |
|------|------|
| T3N | R13E |
| S23 | S24 |
| S26 | S25 |
| 1962 | |

from which I mark

A pine. 10 ins. diam., bears N. 26° E., 55 lks. dist., mkd. S24 BT.

A pine, 8 ins. diam., bears S. 10° E., 53 lks. dist., mkd. S25 BT.

A pine, 5 ins. diam., bears S. 43° W., 44 lks. dist., mkd. S26 BT.

A pine, 8 ins. diam., bears N. 62° W., 47 lks. dist., mkd. S23 BT.

Raise a large mound of stone around cor.

Remonumentation of Corners in T. 3 N., R. 11 E.

CHAINS

Cor. is located on slight N. slope in dense lodgepole pine, about $2\frac{1}{2}$ chs. S. of W. end of open park extending NE. Trees have recently been cut around cor. for photo identification.

At the $\frac{1}{4}$ sec. cor. of secs. 23 and 24, which is mkd. by a quartzite stone, 12x8x5 ins., firmly set in ground and in small mound of stone, mkd. $\frac{1}{4}$ on W. face, from which orig. bearing tree:

A lone pine, 8 ins. diam., bears S. 70° W., $4\frac{1}{2}$ lks. dist., mkd. $\frac{1}{4}$ S BT.

No remaining evidence of the other bearing tree.

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, over broken glass, orig. cor. buried on E. side of post, with brass cap mkd.

$\frac{1}{4}$
T3N R13E
S23 | S24
1962

Raise a mound of stone around cor. and set steel fence post 1 lk. S. of cor.

Cor. is set on E. edge of small swale; all timber in area has been clear cut.

At the cor. of secs. 13, 14, 23 and 24, which is reestablished from SE. orig. bearing tree (cornerstone missing); from reestablished cor.,

A dead pine, 12 ins. diam., bears S. 12° E., 13 lks. dist., mkd. T3N R13E S24 BT.

There is no remaining evidence of the other two bearing trees.

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, over broken glass, with brass cap mkd.

T3N R13E
S14 | S13
S23 | S24
1962

from which I mark

A pine, 12 ins. diam., bears N. 27° E., $8\frac{1}{2}$ lks. dist., mkd. S13 BT.

Raise a mound of stone around cor.; no other trees available.

Cor. is located on gentle E. slope at SW. point of live timber; area to S. and W. has been clear cut.

Remonumentation of Corners in T. 3 N., R. 13 E.

CHAINS

At the cor. of secs. 2, 3, 34 and 35; on the S. bdy. of Tp., which is mkd. by a sandstone, 16x11x7 ins., firmly set, mkd. with 4 notches on W. and 2 notches on E. sides; witnessed by two orig. bearing trees:

A dead pine, 8 ins. diam., bears N. 27° E., 16 lks. dist., mkd. S35 BT.

A pine, 12 ins. diam., bears S. 13° E., 15 lks. dist., mkd. S2 BT.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, over broken glass, orig. cor. buried on NE. side of post, with brass cap mkd.

T3N R13E
 S34|S35
 S 3|S 2
 T2N
 1962

from which I mark

A pine, 8 ins. diam., bears N. 40° E., 47 lks. dist., mkd. S35 BT.

A pine, 6 ins. diam., bears S. 61° W., 67 lks. dist., mkd. S3 BT.

A pine, 8 ins. diam., bears N. 71° W., 53 lks. dist., mkd. S34 BT.

Cor. is located on nearly level ground in dense lodgepole pine.

At the ¼ sec. cor. of secs. 34 and 35, which is mkd. by a quartzite stone, 17x9x8 ins., firmly set in a small mound of stone, and dimly mkd. ¼ on W. face; no other accessories.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, over broken glass, orig. cor. buried on W. side of post, with brass cap mkd.

¼
 T3N R13E
 S34|S35
 1962

from which I mark

A pine, 10 ins. diam., bears S. 27° W., 138 lks. dist. mkd. ¼ S34 BT.

No other tree available.

Raise a mound of stone around cor.

Cor. is located on nearly level open park about 4 chs. N. of a small stream, flows N. 30° W.

Remonumentation of Corners in T. 3 N., R. 13 E.

CHAINS

At the cor. of secs. 26, 27, 34 and 35, which is mkd. by a quartzite stone, 15x11x10 ins., loosely set, mkd. with 1 notch on S. and 2 notches on E. and WC on N. sides; witnessed by few scattered stones. Cor. point is at cor. of fences bearing N. and W.; there is no record of this cor. being a witness cor.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, over broken glass, orig. cor. buried on S. side of post, with brass cap mkd.

T3N R13E
S27|S26
S34|S35
1962

Raise a mound of stone around cor.

Cor. is located at cor. of wire fences bearing N. and W. on nearly level ground in open park known as "Gilbert Meadow" about 4 chs. N. of drain, course NW., and about 12 chs. E. of creek draining N.

At the ¼ sec. cor. of secs. 26 and 27, which is mkd. by a quartzite stone, 15x8x3 ins., firmly set, mkd. ¼ on W. face; from which remains of orig. bearing tree:

A stump hole at base of fallen pine, bears East, 30 lks. dist.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, over broken glass, orig. cor. buried on W. side of post, with brass cap mkd.

¼
T3N R13E
S27|S26
1962

from which I mark

A pine, 10 ins. diam., bears N. 34° E., 45 lks. dist., mkd. ¼ S26 BT.

A pine, 9 ins. diam., bears S. 25° W., 38 lks. dist., mkd. ¼ S27 BT.

Raise a mound of stone around cor.

Cor. is located on gentle W. slope at W. edge of timber, and E. 5 lks. dist. from cor. of wire fences bearing S. and W.; SW. about 8 chs. dist. to "Camp Knnior" cabin in Gilbert Meadow.

At the cor. of secs. 22, 23, 26 and 27, which is mkd. by a sandstone, 18x9x8 ins., firmly set, mkd. with 2 notches on S. and E. edges and witnessed by a mound of stone on the S. side.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, over broken glass, orig. cor. buried on NW. side of post, with brass cap mkd.

Remonumentation of Corners in T. 3 N., R. 13 E.

CHAINS

T3N R13E

S22 | S23

S27 | S26

1962

from which I mark

A pine, 8 ins. diam., bears N. 33° E., 48 lks. dist.,
mkd. S23 BT.

A pine, 14 ins. diam., bears S. 25° E., 61 lks. dist.,
mkd. S26 BT.

A pine, 13 ins. diam., bears N. 13° W., 65 lks. dist.,
mkd. S22 BT.

Raise a large mound of stone around cor.

Cor. is located on a gradual E. slope in small opening
about 2½ chs. dist. N. of creek and about 2½ chs. dist. E
of good graded road bearing nearly N-S.

At the ¼ sec. cor. of secs. 23 and 26, which is mkd. by a
quartzite stone, 14x10x2 ins., firmly set, mkd. ¼ on N.
face, and witnessed by remains of orig. bearing tree:

Stump hole at base of fallen pine, 16 ins. diam., bear.
S. 1° W., 45 lks. dist., trunk mkd. ¼ S BT.

No evidence of the other tree.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in
the ground, with orig. cor. buried on S. side of post,
with brass cap mkd.

T3N R13E

¼ S23

S26

1962

from which I mark

A pine, 8 ins. diam., bears S. 52° W., 32 lks. dist.,
mkd. ¼ S26 BT.

A pine, 5 ins. diam., bears N. 61° W., 52 lks. dist.,
mkd. ¼ S23 BT.

Place collar of rock around cor. and set steel fence post
1 lk. dist. E. of post.

Cor. is located on nearly level, swampy ground in N. edge
of dense timber; clear cut area N. of line, bears W. and
extends E. for about 1 ch., thence N.

At the ¼ sec. cor. of secs. 22 and 23, which is mkd. by a
sandstone, 19x10x6 ins., firmly set, mkd. ¼ on W. face
and witnessed by few scattered rock. There is no remain-
ing evidence of orig. bearing trees.

At cor. point

Remonumentation of Corners in T. 3 N., R. 13 E.

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, over broken glass, orig. cor. buried on E. side of post, with brass cap mkd.

¼
T3N R13E
S22|S23
1962

Raise a mound of stone around cor and set steel fence post near cor.

Cor. is located on nearly level land; surrounding area has all been clear cut, no timber left. A trail road bearing N-S., bears W. of cor. about 1½ chs. dist.

At the cor. of secs. 14, 15, 22 and 23, which is mkd. by a sandstone, 13x10x7 ins., firmly set, mkd. with 3 notches on S. and 2 notches on E. edges and witnessed by few scattered rock; there is no remaining evidence of orig. bearing trees.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, over broken glass, orig. cor. buried on E. side of post, with brass cap mkd.

T3N R13E
S15|S14
S22|S23
1962

Raise a mound of stone around cor.; also set a steel fence post on S. side of cor.

Cor. is located on slight E. slope in clear cut area.

At the ¼ sec. cor. of secs. 14 and 23, which is mkd. by a quartzite stone, 9x9x3 ins., firmly set in small circle of rock, mkd. ¼ on N. face and witnessed by remains of orig. bearing trees:

Stump hole, at base of fallen pine, 6 ins. diam., bears S. 60° W., 5 lks. dist., trunk mkd. ¼ S BT.

Stump hole, at base of fallen pine, 8 ins. diam., no mks. found, bears N. 65° E., 5 lks. dist.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, over broken glass, orig. cor. buried on S. side of post, with brass cap mkd.

T3N R13E
¼
S14
S23
1962

from which, I mark

A pine, 7 ins. diam., bears N. 53° E., 36 lks. dist., mkd. ¼ S14 BT.

Remonumentation of Corners in T. 3 N., R. 13 E.

CHAINS

A pine, 8 ins. diam., bears S. 22° W., 30 lks. dist., mkd. $\frac{1}{2}$ S23 BT.

Place a collar of rock around cor.

Cor. is located on gentle W. slope in med. dense timber about 4 chs. W. of the NW. point of clear cut area bearing E. and S.

At the $\frac{1}{4}$ sec. cor. of secs. 14 and 15, which is mkd. by a sandstone, 28x16x3 ins., firmly set, mkd. $\frac{1}{2}$ on W. face and witnessed by a small mound of stone around cor.

At cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, over broken glass, orig. cor. buried on E. side of post, with brass cap mkd.

$\frac{1}{2}$
T3N R13E
S15|S14
1962

Raise a mound of stone around cor.

Cor. is located on gradual NW. slope in clear cut area about 3 chs. E. of N-S trail road.

At the cor. of secs. 27, 28, 33 and 34, which is mkd. by a sandstone, 20x11x3 ins., firmly set in circle of rock, mkd. with 1 notch on S. and 3 notches on E. edges; no accessories.

At cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, over broken glass, orig. cor. buried on W. side of post, with brass cap mkd.

T3N R13E
S28|S27
S33|S34
1962

from which I mark

A pine, 6 ins. diam., bears S. 35° E., 43 $\frac{1}{2}$ lks. dist., mkd. S34 BT.

A pine, 5 ins. diam., bears S. 57° W., 45 lks. dist., mkd. S33 BT.

A pine, 6 ins. diam., bears N. 35° W., 34 lks. dist., mkd. S28 BT.

Raise a mound of stone around cor.

Cor. is located on gradual W. slope in dense, small lodge-pole pine; a circle about $\frac{1}{2}$ ch. in diam. has been cut around cor. for photo identification.

Remonumentation of Corners in T. 3 N., R. 13 E.

CHAINS

At the 1/4 sec. cor. of secs. 27 and 34, which is mkd. by a sandstone, 14x14x3 ins., loosely set in a small mound of stone, dimly mkd. 1/4 on N. face and witnessed by orig. bearing trees:

A pine, 12 ins. diam., bears N. 55° E., 37 lks. dist., mkd. 1/4 S BT.

A sawed pine stump, 1 ft. high, with orig. tree trunk on ground showing dim scribe marks, bears S. 30° E., 9 lks. dist.

At cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 20 ins. in the ground to rock, over broken glass, orig. cor. buried on S. side of post, with brass cap mkd.

T3N R13E
1/4 S27
S34
1962

from which I mark

A pine, 8 ins. diam., bears S. 3° E., 29 lks. dist., mkd. 1/4 S34 BT.

Cor. is located on slight E. slope in dense lodgepole pine about 10 chs. W. of graded road bearing N-S.

At the cor. of secs. 15, 16, 21 and 22, which is mkd. by a quartzite stone, 15x10x6 ins., firmly set in circle of rock, mkd. with 3 notches on S. and E. edges; from which orig. bearing trees:

A pine, 9 ins. diam., bears N. 83° E., 8 1/2 lks. dist., mkd. T3N R13 E S15 BT.

Base of fallen pine, 9 ins. diam., properly mkd., bears S. 35° E., 8 lks. dist.

A dead pine, 15 ins. diam., bears S. 12° W., 9 lks. dist., properly mkd.

A dead pine, 10 ins. diam., bears N. 41° W., 19 lks. dist., properly mkd.

At cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, over broken glass, orig. cor. buried on E. side of post, with brass cap mkd.

T3N R13E
S16 | S15
S21 | S22
1962

from which I mark

A pine, 9 ins. diam., bears S. 27° E., 46 1/2 lks. dist., mkd. S22 BT.

A pine, 10 ins. diam., bears S. 79° W., 51 1/2 lks. dist., mkd. S21 BT.

A pine, 8 ins. diam., bears N. 6° W., 40 lks. dist., mkd. S16 BT.

Cor. is located on W. slope in dense timber about 3 chs. W. of NW. point of clear cut land.

CERTIFICATE OF SURVEY

I, **Andrew Nelson, Cadastral Surveyor**, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 15th day of **February**, 19 **61**, I have remonumented corners in T. 2 S., R. 7 E., (H.E.S. No. 103), T. 1 S., R. 6 E., T. 2 N., R. 11 E., and T. 3 N., R. 13 E.

of the **Salt Lake** Meridian, in the State of **Utah**, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual **remonumentation** of Instructions for the ~~Survey~~ of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

April 22, 1963
(Date)
Salt Lake City, Utah

(Date)

Andrew Nelson
(Cadastral Surveyor)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT,
Washington, D. C.

The foregoing field notes of the **remonumented corners in T. 2 S., R. 7 E., (H.E.S. No. 103), T. 1 S., R. 6 E., T. 2 N., R. 11 E., and T. 3 N., R. 13 E.**

executed by **Andrew Nelson, Cadastral Surveyor** having been critically examined and found correct, are hereby approved.

JUL 1 1964
(Date)

E. L. Pennington
(Chief, Division of Engineering)

CERTIFICATE OF TRANSCRIPT

~~I CERTIFY That the foregoing transcript of the field notes of the above-described surveys in **Utah**, is a true copy of the original field notes.~~

~~_____
(Date)~~

~~_____
(Chief, Division of Engineering)~~

ORIGINAL
FIELD NOTES

of the

Remonumentation of Corners in

Township 2 South, Range 11 West

and

Township 3 South, Range 12 West

RECEIVED
BUREAU OF LAND MANAGEMENT
DEPT. OF THE INTERIOR
BUREAU OF LAND MGMT
1964 JUL 17 11:10 AM '64

Of the Uintah Special Meridian,

In the State of Utah .

EXECUTED BY

Andrew Nelson, Cadastral Surveyor

Under special instructions dated February 15, 19 61, which provided for the surveys
included under Group Number 447, approved February 16, 1961,
and assignment instructions dated April 27, 19 62.

Survey commenced June 2, 19 62

Survey completed June 3, 19 62


INDEX DIAGRAM

Township 2 South, Range 11 West, UINTAH SPC., MER.

| | | | | | |
|----|----|----|----|----|----|
| 6 | 5 | 4 | 3 | 2 | 1 |
| 7 | 8 | 9 | 10 | 11 | 12 |
| 18 | 17 | 16 | 15 | 14 | 13 |
| 19 | 20 | 21 | 22 | 23 | 24 |
| | | 2 | | | |
| 30 | 29 | 28 | 27 | 26 | 25 |
| | | 1 | | | |
| 31 | 32 | 33 | 34 | 35 | 36 |
| | | 1 | | | |

CORNER REMONUMENTATION INDEX DIAGRAM

Township 3 South, Range 12 West, Uintah Spc. Meridian

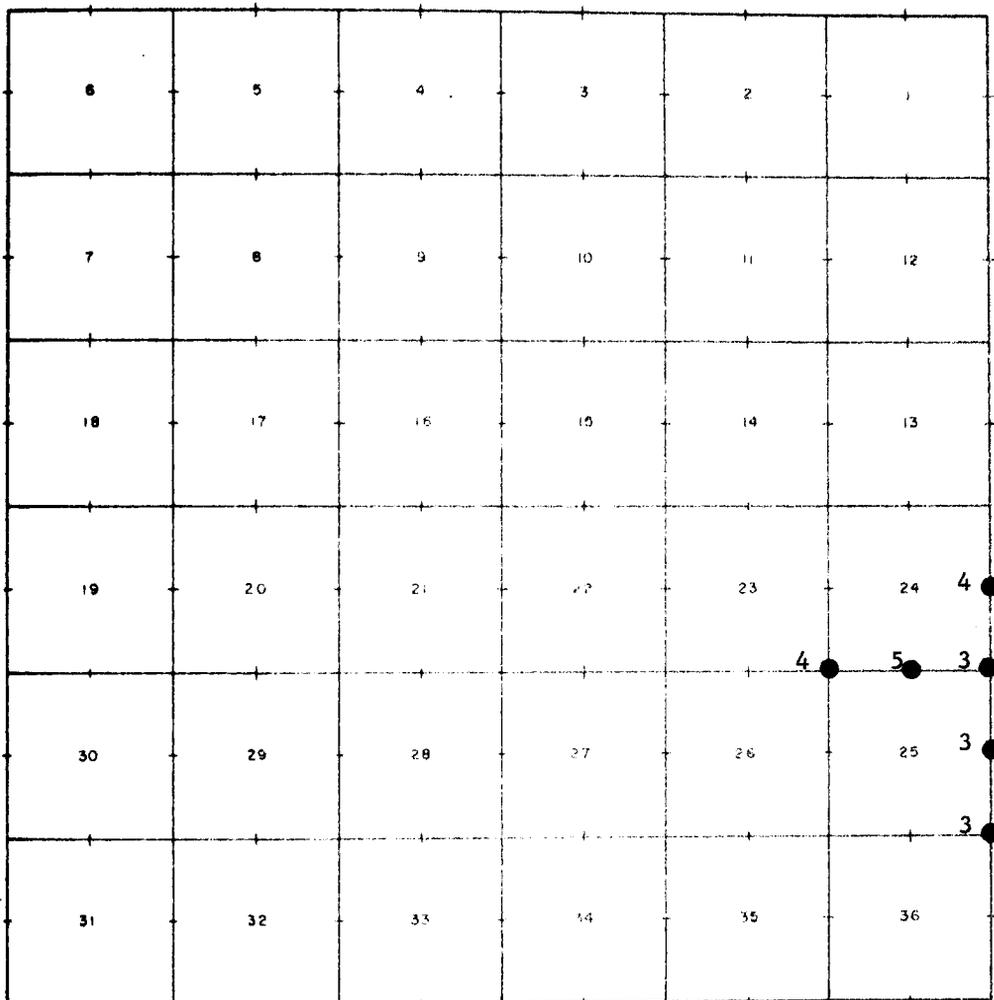

Remonumentation of Corners in T. 2 S., R. 11 W., Uintah Special Mer.

CHAINS

The following field notes are those of the remonumentation of certain identified original corners selected by the U. S. Forest Service as being adjacent to or controlling the boundaries of Forest Service Lands located within the Uinta National Forest in the following townships:

T. 2 S., R. 11 W. and T. 3 S., R. 12 W., in
 Uintah Special Meridian, Utah.

The position of each corner was marked by the original monument or determined from corner accessories recorded in the survey record. The monumentation was requested by and accomplished in cooperation with the Forest Service.

T. 2 S., R. 11 W.

T. 2 S., R. 11 W., Uintah Special Mer., Utah, is located within the Uinta National Forest; the N., S. and W. boundaries and the subdivisions of the township were surveyed by J. M. Lentz, deputy surveyor, in 1904.

At the cor. of secs. 4, 5, 32 and 33, on the S. bdy. of the Tp., which is mkd. by a granite stone, 15x9x8 ins., mkd. with 2 notches on one side and 4 notches on opposite side, found lying on the ground along side a galvanized pipe, 2 ft. long, with screw cap firmly driven in the ground at orig. cor. position as evidenced by record from orig. bearing tree:

An aspen, 9 ins. diam., bears S. 28° E., 19 lks. dist., showing scribe marks in the bark.

There is no evidence of the other aspen bearing trees.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, over broken glass, orig. cor. buried on N. side of post, with brass cap mkd.

T2S R11W
 S32|S33
 S 5|S 4
 T3S
 1962

from which I mark

An aspen, 7 ins. diam., bears N. 47° 30' E., 34 lks. dist., mkd. T2S R11W S33 BT.

Cor. is located on a gradual SW. slope in aspen and about 20 lks. E. of a trail road, bears nearly N-S.

At the cor. of secs. 28, 29, 32 and 33, which is mkd. by a sandstone, 10x8x5 ins., firmly set, mkd. with 1 notch on S. and 4 notches on E. edges; from which orig. bearing trees:

A dead aspen, 4 ins. diam., bears S. 15° E., 5 lks. dist., no mks. remaining.

An aspen, 5 ins. diam., bears N. 58° E., 5 lks. dist., indistinct marks in the bark.

An aspen, 6 ins. diam., bears S. 23° W., 11 lks. dist., mkd. in the park T2S R11W S32 BT.

Remonumentation of Corners in T. 2 S. R. 11 W.

CHAINS

A dead aspen, 5 ins. diam., bears N. 21° W., 4 lks. dist., dim scribe mks. in bark.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, over broken glass, orig. cor. buried on E. side of post, with brass cap mkd.

| |
|-------------------------|
| T2S R11W |
| <u>S29</u> <u>S28</u> |
| S32 S33 |
| 1962 |

from which I mark

An aspen, 6 ins. diam., bears N. 59° E., 35 lks. dist. mkd. in bark T2S R11W S28 BT.

An aspen, 7 ins. diam., bears S. 17° E., 36 lks. dist. mkd. in bark T2S R11W S33 BT.

An aspen, 6 ins. diam., bears S. 18° W., 32 lks. dist. blazed and mkd. S32 BT.

Cor. is located on medium steep NW. slope in aspen, about 5 chs. N. of ridge, near point, slopes SW.; old Forest Service cut line through timber, N-S, bears W. of cor. 90 lks. dist.

At the cor. of secs. 20, 21, 28 and 29, which is reestablished (wood cor., post missing) from orig. bearing trees

An aspen, 16 ins. diam., bears N. 89° E., 17 lks. dist

An aspen, 11 ins. diam., bears S. 30° E., 32 lks. dist

An aspen, 12 ins. diam., bears S. 41° W., 58 lks. dist

An aspen, 14 ins. diam., bears N. 34° W., 114 lks. dist. (slope 116 lks.) (Record dist. 116 lks.)

All trees mkd. in the bark, nearly illegible.

At reestablished point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, over broken glass, with brass cap mkd.

| |
|-------------------------|
| T2S R11W |
| <u>S20</u> <u>S21</u> |
| S29 S28 |
| 1962 |

from which I mark

An aspen, 5 ins. diam., bears N. 41° E., 8 lks. dist., blazed and mkd. S21 BT.

An aspen, 11 ins. diam., bears S. 65° E., 38 lks. dist., blazed and mkd. T2S R11W S28 BT.

An aspen, 9 ins. diam., bears S. 20° W., 46 lks. dist., blazed and mkd. S29 BT.

Cor. is located on steep NW. slope in aspen; evidence of old cut lines extending S. and W., bears about S. 70° W., 1½ chs. dist.

Remonumentation of Corners in T. 3 S., R. 12 W.

CHAINS

Township 3 South, Range 12 W., Uintah Special Mer., is located in the Uinta National Forest; the N., E. and S. boundaries and the subdivisions of the township were surveyed by J. M. Lentz, Deputy Surveyor, in 1904.

At the cor. of secs. 25, 30, 31 and 36 on E. bdy. of Tp., which is mkd. by a granite stone, 17x11x6 ins., firmly set, mkd. with 1 notch on S. and 5 notches on N. edges, unwitnessed.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, over broken glass, orig. cor. buried on W. side of post, with brass cap mkd.

T3S
R12W R11W
S25|S30
S36|S31
1962

Place collar of rock around post.

Cor. is located 2 lks. W. of N-S wire fence on a gentle NE. slope, about 6 chs. dist. S. of swale, draining SE.

At the ¼ sec. cor. of secs. 25 and 30, on E. bdy. of Tp., which is mkd. by a cobble rock, 14x8x6 ins., firmly set, mkd. ¼ on W. face and witnessed by few scattered rock.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, over broken glass, orig. cor. buried on W. side of post, with brass cap mkd.

T3S
¼
R12W R11W
S25|S30
1962

Place collar of rock around post.

Cor. is located in N-S wire fence, and about 7 chs. N. of junction of a fence from the W., on gradual W. slope in sagebrush.

At the cor. of secs. 19, 24, 25 and 30, mkd. by a cobble rock, 17x8x6 ins. loosely set, mkd. with 2 notches on S. and 4 notches on N. edges; no accessories.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, over broken glass, orig. cor. buried on E. side of post, with brass cap mkd.

T3S
R12W R11W
S24|S19
S25|S30
1962

Remonumentation of Corners in T. 3 S., R. 12 W.

CHAINS

Place collar of rock around post.

Cor. is located in N-S wire fence on gentle NW. slope about 2 chs. E. of small draw, drains N.

At the $\frac{1}{2}$ sec. cor. of secs. 19 and 24, on E. bdy. of Tp. which is mkd. by a granite stone, 16x12x9 ins., loosely set, mkd. $\frac{1}{2}$ on W. face and witnessed by a small mound of stone W. of cor.

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, over broken glass, orig. cor. buried on W. side of post, with brass cap mkd.

T3S
 $\frac{1}{2}$
R12W R11W
S24 | S19
1962

Raise a mound of stone around cor.

Cor. is located 11 lks. W. of N-S wire fence and N. 40 lks. from junction of fence from the E., with N-S fence; a small creek draining S. bears W. of cor. about $2\frac{1}{2}$ chs. dist.

At the cor. of secs. 23, 24, 25 and 26, which is mkd. by a sandstone, 22x10x8 ins., broken and lying on the ground, mkd. with 2 notches on one edge and 1 notch on cornering edge; from which orig. bearing tree:

An aspen, 8 ins. diam., bears N. 50° W., 108 lks. dist. (the record), mkd. in bark T3S R12W S23 BT.

The only remaining evidence of the other bearing tree is a rotted aspen trunk lying on the ground at approx. rec. position.

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, over broken glass, orig. stone buried on N. side of post, with brass cap mkd.

T3S R12W
S23 | S24
S26 | S25
1962

from which I mark

An aspen, 13 ins. diam., bears S. 70° W., 189 lks. dist., mkd. T3S R12W S26 BT.

An aspen, 5 ins. diam., bears N. 64° 30' W., 98 lks. dist., mkd. S23 BT.

Cor. is located on a gradual E. slope in sagebrush; scattered aspen W. of cor.

Re monumentation of Corners in T. 3 S., R. 12 W.

CHAINS

the $\frac{1}{4}$ sec. cor. of secs. 24 and 25, which is mkd. by a cobblestone, 14x9x9 ins., firmly set, mkd. $\frac{1}{2}$ on N. face; no accessories. All trees in area have been destroyed in clearing land.

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, over broken glass, orig. cor. buried on N. side of post, with brass cap mkd.

T3S R12W

$\frac{1}{4}$ S24

S25

1962

is e a small mound of stone around cor.

cor. is located on a gradual E. slope in open cleared land about $1\frac{1}{2}$ chs. W. of small drain, course N. and about 8 chs. of small creek, drains NE.

CHAINS

The following table shows the number of chains of length 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 31, 32, 33, 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 45, 46, 47, 48, 49, 50, 51, 52, 53, 54, 55, 56, 57, 58, 59, 60, 61, 62, 63, 64, 65, 66, 67, 68, 69, 70, 71, 72, 73, 74, 75, 76, 77, 78, 79, 80, 81, 82, 83, 84, 85, 86, 87, 88, 89, 90, 91, 92, 93, 94, 95, 96, 97, 98, 99, 100.

The following table shows the number of chains of length 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 31, 32, 33, 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 45, 46, 47, 48, 49, 50, 51, 52, 53, 54, 55, 56, 57, 58, 59, 60, 61, 62, 63, 64, 65, 66, 67, 68, 69, 70, 71, 72, 73, 74, 75, 76, 77, 78, 79, 80, 81, 82, 83, 84, 85, 86, 87, 88, 89, 90, 91, 92, 93, 94, 95, 96, 97, 98, 99, 100.

CERTIFICATE OF SURVEY

I, **Andrew Nelson, Cadastral Surveyor**, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the **15th** day of **February**, 19 **61**, I have remonumented corners in T. 2 S., R. 11 W., and T. 3 S., R. 12 W.

of the **Salt Lake** Meridian, in the State of **Utah**, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual **remonumentation** of Instructions for the ~~Survey~~ of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

April 22, 1963
(Date)
Salt Lake City, Utah

Andrew Nelson
(Cadastral Surveyor)

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT,
Washington, D. C.

The foregoing field notes of the remonumented corners in T. 2 S., R. 11 W., and T. 3 S., R. 12 W.

executed by **Andrew Nelson, Cadastral Surveyor**

having been critically examined and found correct, are hereby approved.

JUL 1 1964
(Date)

E. L. Remington
(Chief, Division of Engineering)

CERTIFICATE OF TRANSCRIPT

I CERTIFY That the foregoing transcript of the field notes of the above-described surveys in **Utah**, is a true copy of the original field notes.

(Date)

(Chief, Division of Engineering)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

ORIGINAL
FIELD NOTES

OF THE

Remonumentation of Corners in

T. 39 S., R. 15 W., T. 37 S., R. 14 W.,

Tps. 35, 36, 37 and 39 S., R. 6 W.,

Tps. 33, 34, 35, 36 and 37 S., R. 7 W.,

T. 35 S., R. 1 E. (H. E. S. No. 90)

DEPT. OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

Of the Salt Lake Meridian,

In the State of Utah

EXECUTED BY

Andrew Nelson, Cadastral Surveyor

Under special instructions dated February 15, 19 61, which provided for the surveys
included under Group Number 447, approved February 16, 1961,
and assignment instructions dated April 27, 19 62.

Survey commenced May 1, 19 62

Survey completed May 10, 19 62


INDEX DIAGRAM

Township _____, Range _____,

| | | | | | |
|----|----|----|----|----|----|
| 6 | 5 | 4 | 3 | 2 | 1 |
| 7 | 8 | 9 | 10 | 11 | 12 |
| 18 | 17 | 16 | 15 | 14 | 13 |
| 19 | 20 | 21 | 22 | 23 | 24 |
| 30 | 29 | 28 | 27 | 26 | 25 |
| 31 | 32 | 33 | 34 | 35 | 36 |


CORNER REMONUMENTATION INDEX DIAGRAM

Township 39 South, Range 15 West, S.L. Meridian

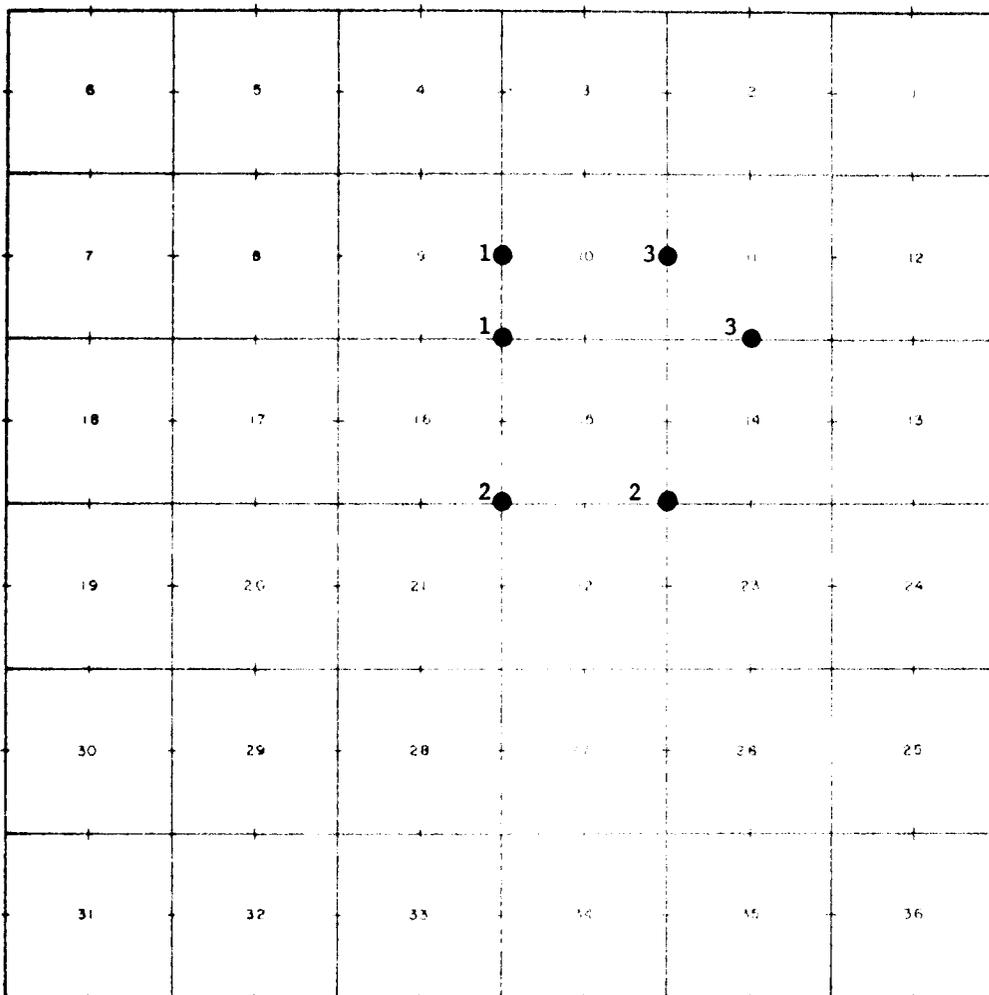


CORNER REMONUMENTATION INDEX DIAGRAM

ownship 37 South, Range 14 West, S. L. Meridian

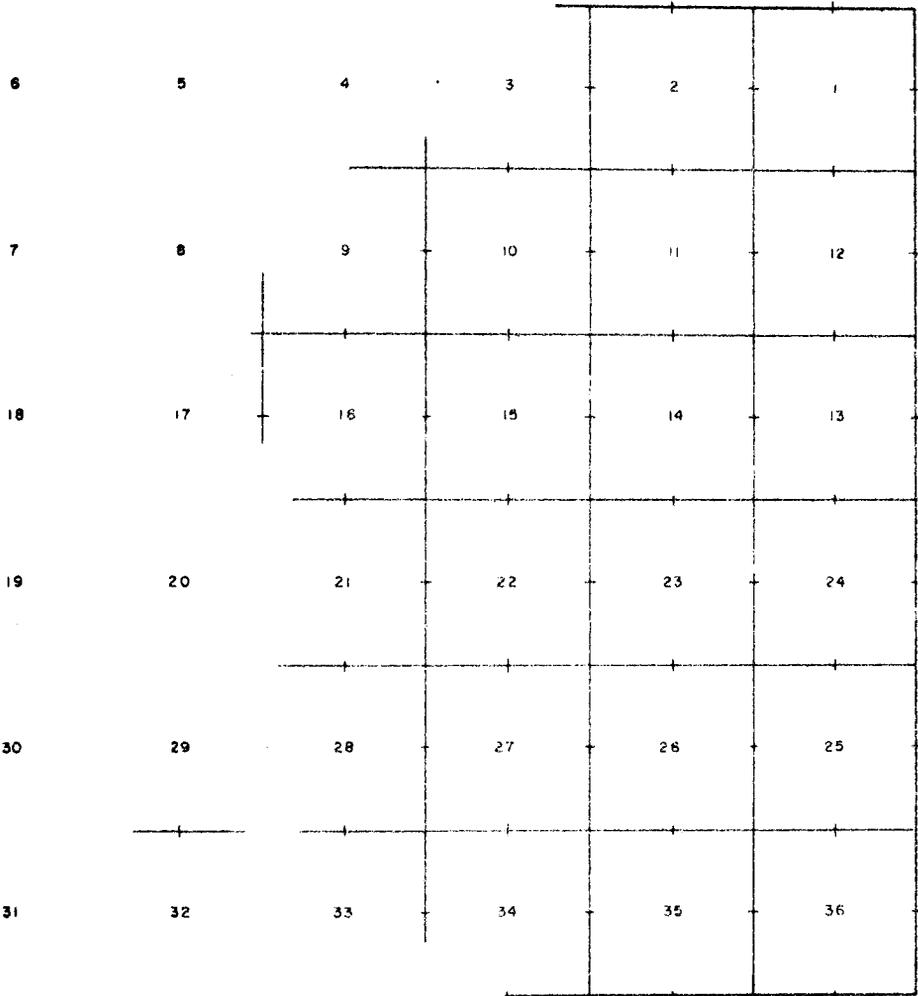


CORNER REMONUMENTATION INDEX DIAGRAM

Township 39 South, Range 6 West, S.L. Meridian

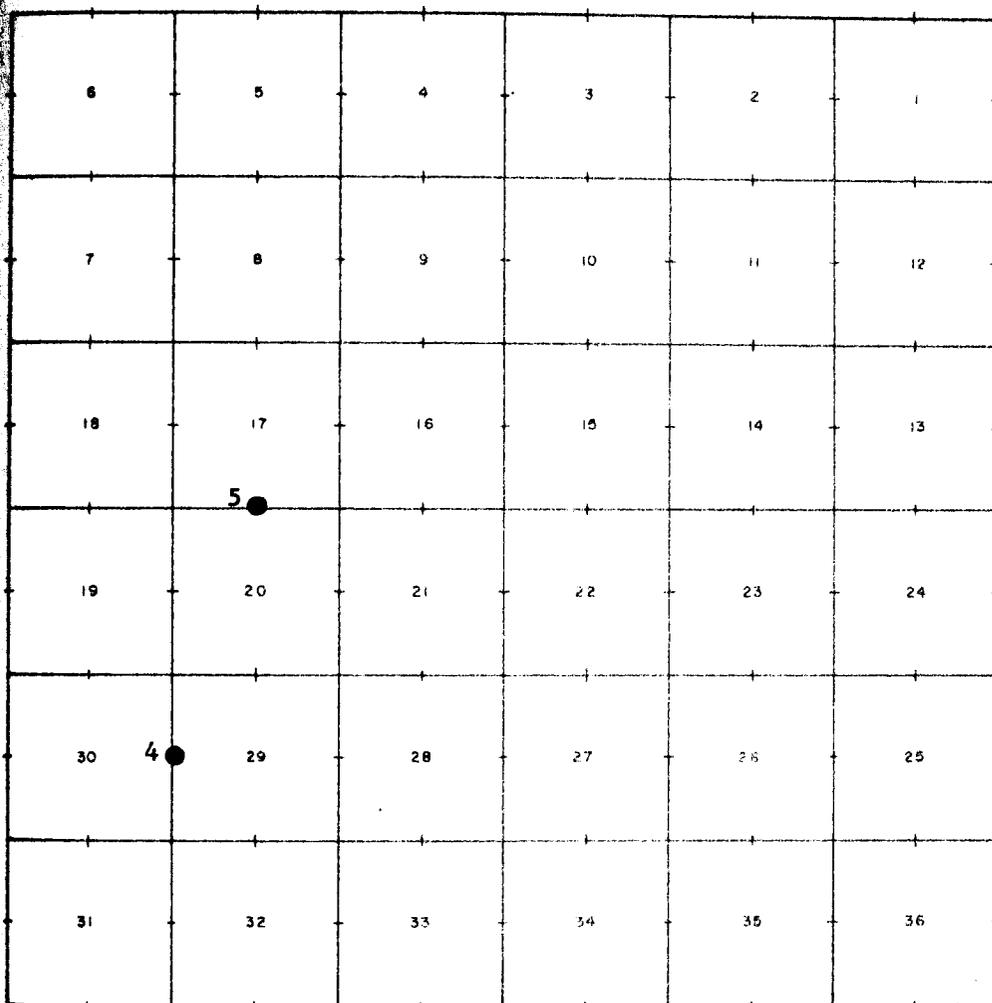


CORNER REMONUMENTATION INDEX DIAGRAM

Township 35 South, Range 6 West, S. L. Meridian

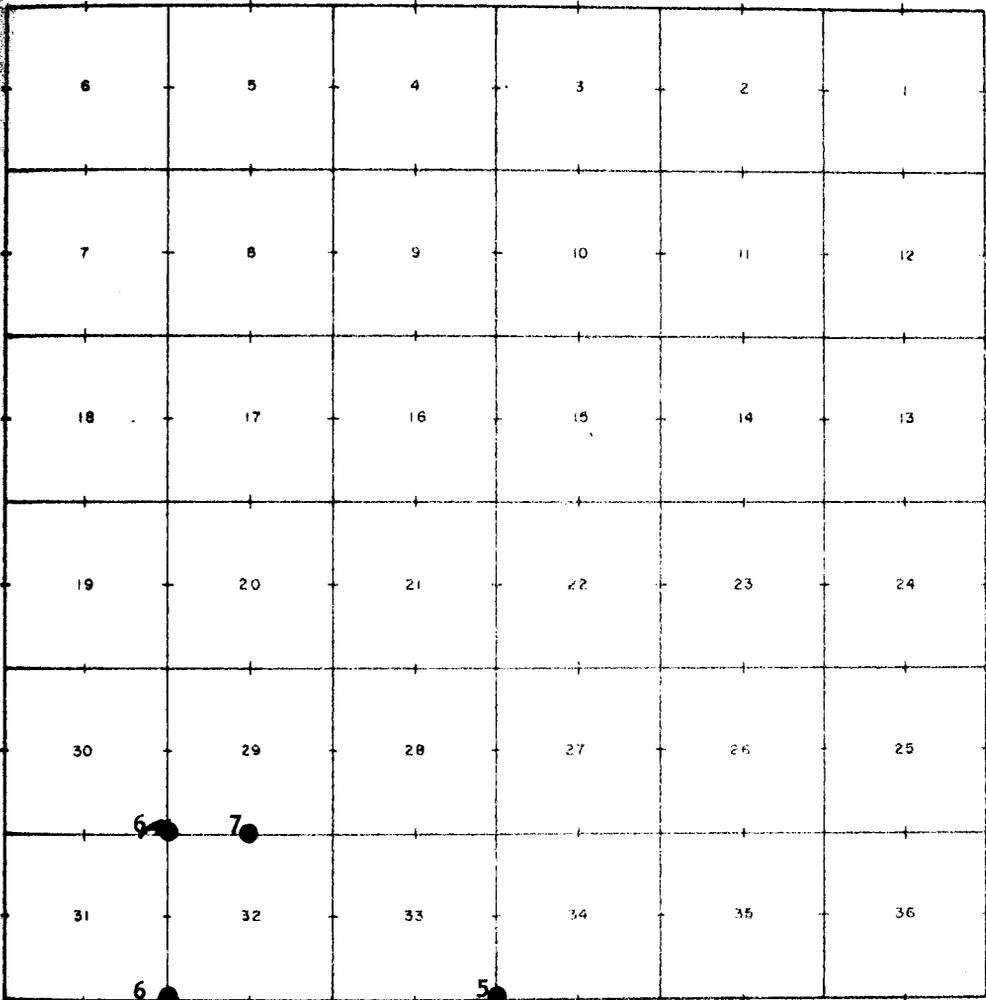


CORNER REMONUMENTATION INDEX DIAGRAM

Township 36 South, Range 6 West, S. L. Meridian

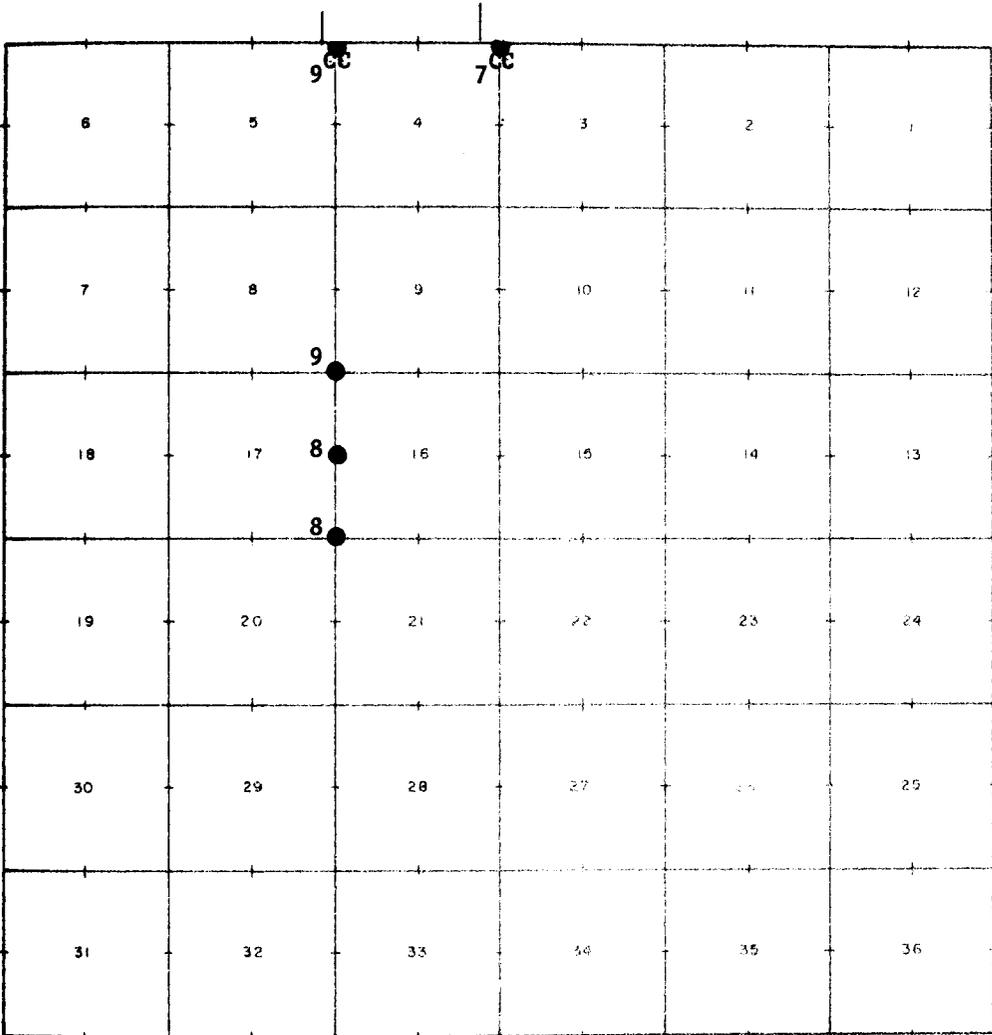


CORNER REMONUMENTATION INDEX DIAGRAM

Township 36 South, Range 7 West, S. L. Meridian

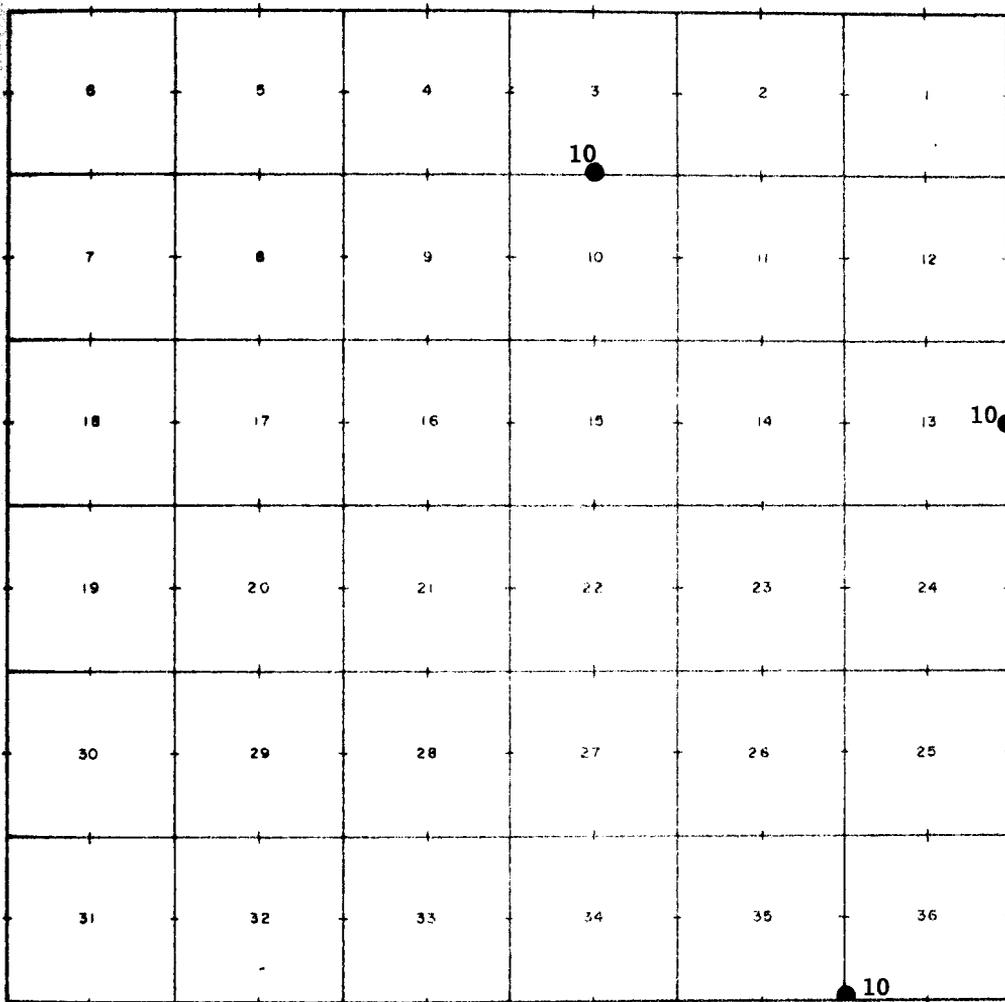


CORNER REMONUMENTATION INDEX DIAGRAM

Township 37 South, Range 6 West, S. L. Meridian

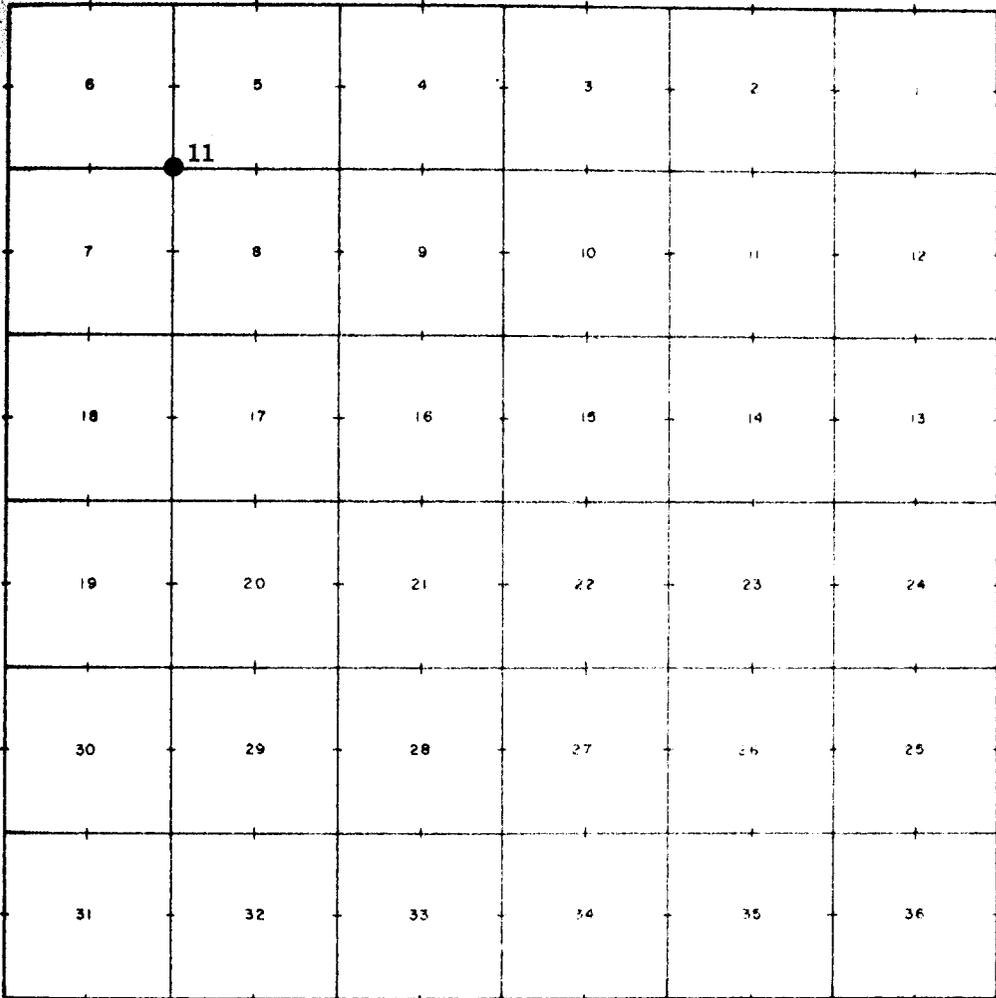


CORNER REMONUMENTATION INDEX DIAGRAM

Township 37 South, Range 7 West, S. L. Meridian

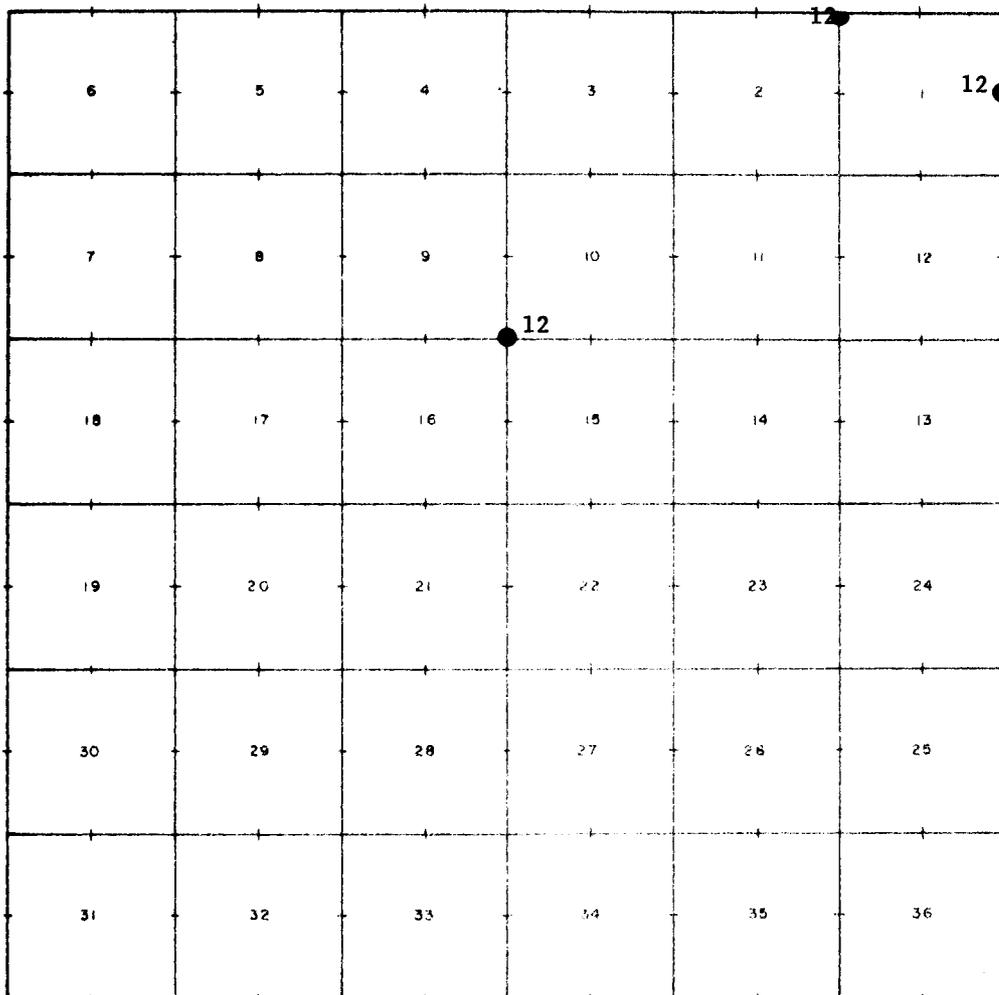


CORNER REMONUMENTATION
INDEX DIAGRAM

Township 35 S outh, Range 7 West, S. L. Meridian

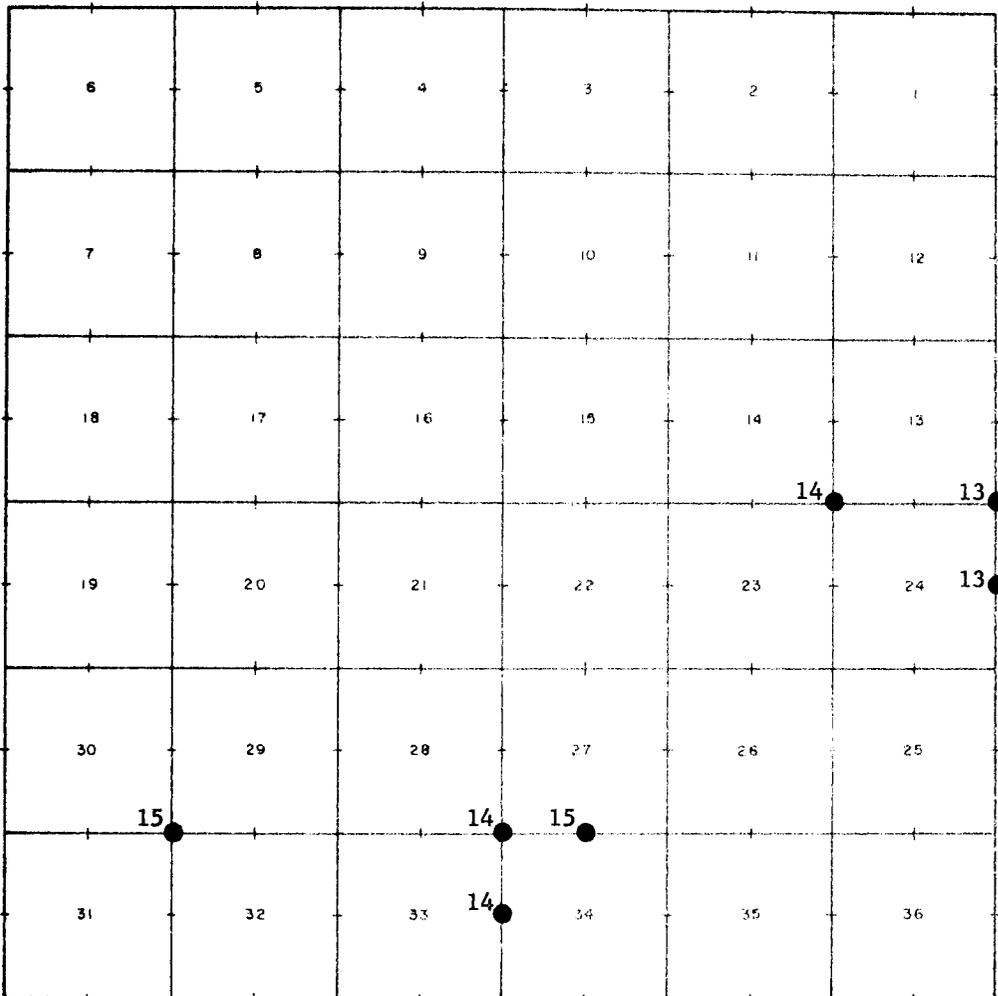


CORNER REMONUMENTATION INDEX DIAGRAM

Township 34 South, Range 7 West, S. L. Meridian

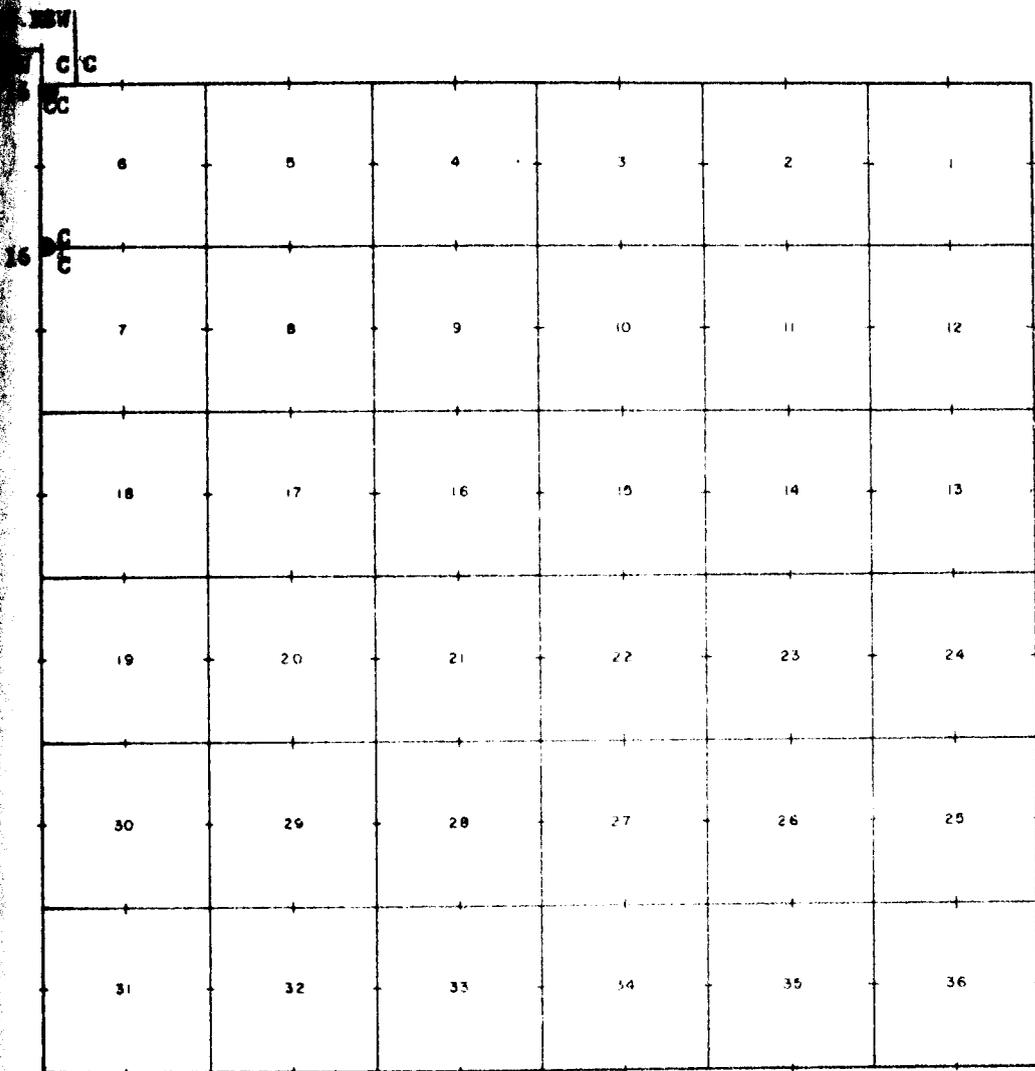


CORNER REMONUMENTATION
INDEX DIAGRAM

Township... 33 South ... Range 7 West ... 6. 12. Meridian

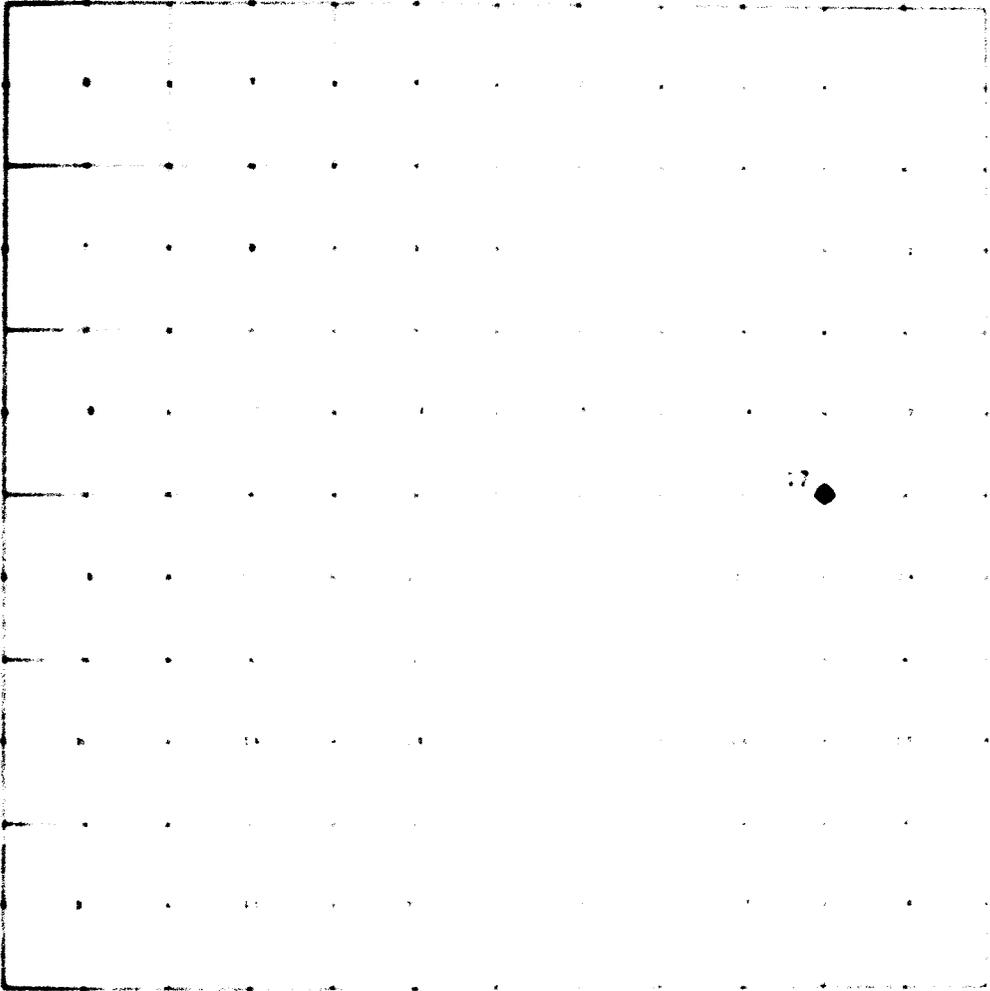

CORNER REMONUMENTATION INDEX DIAGRAM

Township 35 South, Range 1 East, S. L. Meridian

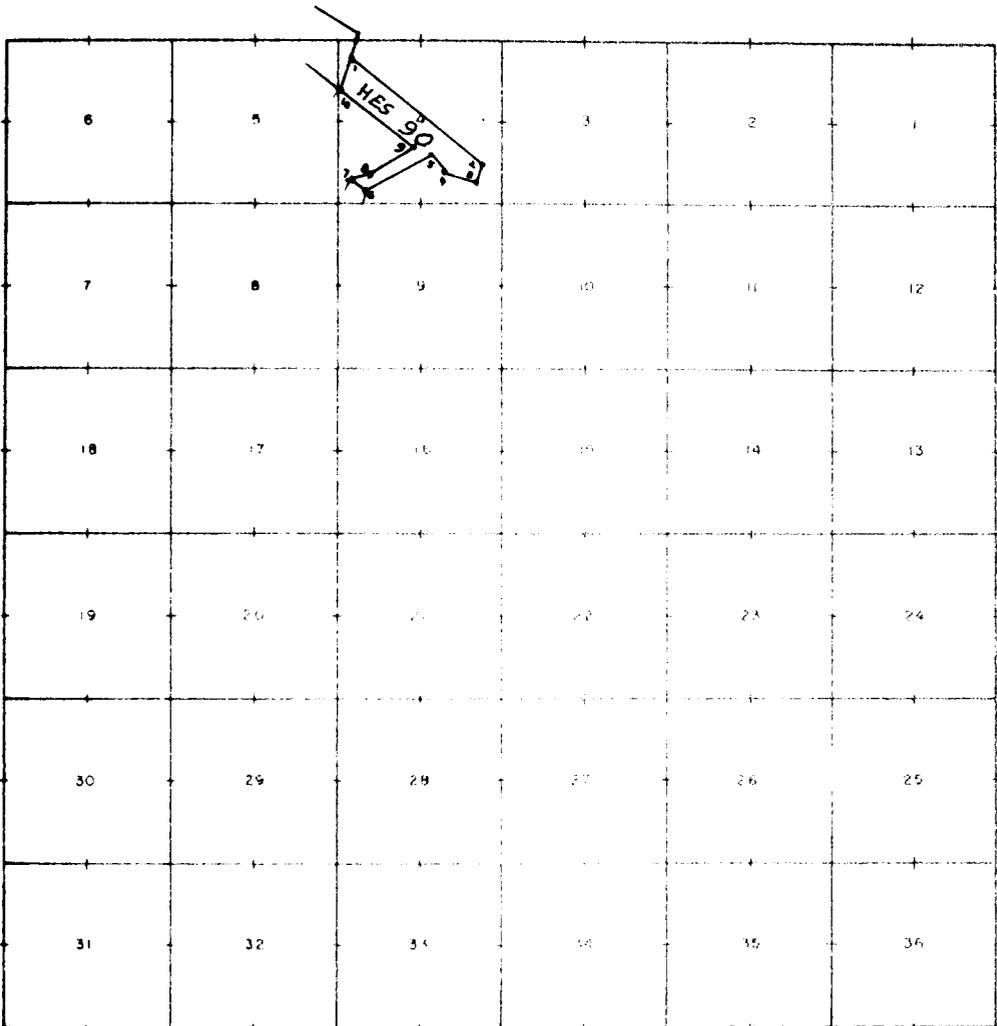

N. E. S. No. 90, in secs. 4 and 5.
All corners on claim, 1 to 10 incl. set.
Pages 18 to 21

Remonumentation of Corners in T. 39 S., R. 15 W.

CHAINS

The following field notes are those of the remonumentation of certain identified original corners selected by the U. S. Forest Service as being adjacent to or controlling the boundaries of Forest Service lands located in the Dixie National Forest in the following townships:

T. 39 S., R. 15 W.
 T. 37 S., R. 14 W.
 Tps. 35, 36, 37 and 39 S., R. 6 W.
 Tps. 33, 34, 35, 36 and 37 S., R. 7 W.
 T. 35 S., R. 1 E. (H.E.S. No. 90), all in
 Salt Lake Meridian, Utah

The position of each corner was marked by the original monument or determined from corner accessories recorded in the survey record. The remonumentation was requested by and accomplished in cooperation with the Forest Service.

T. 39 S., R. 15 W.

T. 39 S., R. 15 W., SL Mer., situated within the Dixie National Forest was surveyed by Bailey & Burrill, Deputy Surveyors, in 1877.

At the $\frac{1}{4}$ sec. cor. of secs. 9 and 10, which is mkd. by a volcanic stone, 12x12x9 ins., firmly set in the ground, plainly mkd. $\frac{1}{2}$ on W. face and witnessed by a small mound of stone, E. of cor.

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, over broken glass, orig. cor. buried on N. side of post, with brass cap mkd.

$\frac{1}{4}$
 T39S R15W
 S9 | S10
 1962

Place collar of rock around post.

Cor. is located at N. edge and about 40 lks. N. of the approximate center of oiled road bet. Pine Valley and Central, bearing about E. and W. and about $2\frac{1}{2}$ chs. dist. N. from rim of Santa Clara River.

At the cor. of secs. 9, 10, 15 and 16, which is mkd. by a volcanic stone, 16x15x8 ins., firmly set, mkd. with 4 notches on S. and 3 notches on E. edges and witnessed by a small mound of stone E. of cor.

At cor. point

Set an iron post, 30 ins. long $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, over broken glass, orig. cor. buried on N. side of post, with brass cap mkd.

T39S R15W
 S9 | S10
 S16 | S15
 1962

Raise a large mound of stone W. of cor. and place collar of rock around post.

CHAINS

Cor. is located on med. steep E. slope in dense sage and service brush about 4 chs. E. of a ridge bearing N-S, and about 2 chs. W. of cleared, reseeded land.

At the cor. of secs. 15, 16, 21 and 22, which is mkd. by granite boulder in place, showing 2x2x1 ft. above ground, mkd. at SE. edge, 3 notches on S. and E. sides, witnessed by a mound of stone on the W. and one orig. bearing tree:

A juniper, 15 ins. diam., bears S. 89° 30' W., 112 lks. dist., mkd. S21 T39S R16W (no BT).

At cor. point, against E. edge of boulder.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, over broken glass, with brass cap mkd.

T39S R15W
S16 | S15
 S21 | S22
 1962

from which I mark

A juniper, 8 ins. diam., bears S. 87° E., 43 lks. dist., mkd. S22 BT.

Cor. is located in N-S wire fence, on NE. slope in medium dense scrub mahogany and oak brush with few junipers.

At the cor. of secs. 14, 15, 22 and 23, which is mkd. by a granite stone, 13x12x8 ins., loosely set, mkd. with 3 grooves on S. and 2 grooves on E. face, witnessed by a mound of stone, 2x1½ ft. W. of cor.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, over broken glass, orig. cor. buried on E. side of post, with brass cap mkd.

T39S R15W
S15 | S14
 S22 | S23
 1962

Enlarge the mound of stone W. of cor. and place collar of rock around post.

Cor. is located on gentle N. slope in small mahogany and dense sagebrush about ¼ mile S. of Pine Valley.

At the ¼ sec. cor. of secs. 10 and 11, which is mkd. by a volcanic stone, 18x17x5 ins., firmly set in a small mound of stone mkd. ¼ on W. face, from which remains of orig. bearing tree;

A juniper stump, 2 ft. high, 13 ins. diam., showing evidence of old blaze and dim scribe marks, bears S. 11° E., 70 lks. dist. (record bearing S. 5° E.)

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground to solid rock, over broken glass, with orig. or. set on SW. side and supported in a large mound of stone to top, with brass cap mkd.

Remonumentation of Corners in T. 39 S., R. 15 W.

CHAINS

¼
T39S R15W
S10|S11
1962

from which I mark

A juniper, 7 ins. diam., bears N. 71° W., 29 lks. dist., mkd. ¼ S10 BT.

A juniper, 13 ins. diam., bears S. 8° E., 73 lks. dist., mkd. ¼ S11 BT.

Cor. is located on gentle S. slope in scattered juniper and oak brush, about 6 chs. dist. E. of unimproved road bet. Pine Valley, Grass Valley and Pinto.

At the ¼ sec. cor. of secs. 11 and 14, which is mkd. by a volcanic stone, 15x12x7 ins., loosely set in a small mound of stone, mkd. ¼ on N. face; no other accessories.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground to rock, over broken glass, orig. cor. buried on S. side of post, with brass cap mkd.

T39S R15W
¼ S11
S14
1962

Raise a mound of stone around cor.

Trees within limits too scrubby for marking.

Cor. is located on med. steep S. slope, in head of very shallow drain, course S., in scrub juniper. Pine Valley Cemetery bears about S. 10 chs. dist.

Remonumentation of Corner in T. 37 S., R. 14 W.

T. 37 S., R. 14 W., SL Mer., is situated in the Dixie National Forest; the S. bdy., portions of the W. bdy., and portion of the subdivisions were surveyed by A. J. Stewart, Deputy Surveyor, in 1873. Stewart established the SW. cor. of the Tp. as a common cor. of Tps. 37 and 38 S., Rs. 14 and 15 W. T. C. Bailey in 1881 surveyed the E. bdy. of T. 38 S., R. 15 W. and established a closing cor. for Tps. 38 S., Rs. 14 and 15 W. at a point W. 24.21 chs. dist. from the Stewart Tp. cor.

At the cor. of Tps. 37 S., Rs. 14 and 15 W., which I found to be mkd. by a granite stone, 25x12x8 ins., plainly mkd. with 6 notches on all four edges, lying on the ground, and alongside on the ground was a G.L.O. iron post, 3 ins. diam., properly mkd. for this cor. and dated "1918"; from which orig. bearing trees:

A cedar, 13 ins. diam., bears S. 81° 45' E., 127 lks. dist., shows old blaze and dim, illegible scribe mks.

A pinon limb, 9 ins. diam., bears N. 89° 30' E., 126 lks. dist., blazed, scribed S31, other marks illegible. (Record N. 65° E., 100 lks.)

CHAINS

Remonumentation of Corner in T. 37 S., R. 14 W.

A pinon, 8 ins. diam., bears N. 52° 30' W., 365 lks. dist., shows old blaze, marks overgrown (record N. 54° 30' W., 265 lks.)

No evidence found of the SW. bearing tree.

At cor. point

Set the G.L.O. iron post, 36 ins. long, 3 ins. diam., 24 ins. in the ground, over broken glass, and orig. stone set on W. side of post, with brass cap mkd. as found

T37S
R15W R14W
S36|S31
1918

from which I mark

A pinon, 16 ins. diam., bears N. 71° E., 105 lks. dist., mkd. T37S R14W S31 BT.

Cor. is located on gentle NW. slope in scattered timber, about $\frac{1}{2}$ ch. E. of unimproved road bearing NW. and SE. and at the approx. top of pass in low ridge, bears E-W.

Remonumentation of Corners in T. 39 S., R. 6 W.

T. 39 S., R. 6 W., SL Mer., situated in the Dixie National Forest; a portion of the subdivisions were surveyed by J. G. Burrill in 1876; Shadrock M. Richardson in 1884 resurveyed the Burrill surveys and completed the survey of the Tp.

At the $\frac{1}{4}$ sec. cor. of secs. 29 and 30, which is mkd. by a sandstone 13x9x6 ins., mkd. $\frac{1}{4}$ lying on the ground in its orig. position as evidenced by record bearing and dist. from orig. bearing tree.

A dead standing yellow pine, 27 ins. diam., bears N. 45° E., 65 lks. dist., mkd. $\frac{1}{4}$ S BT on W. face.

At cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground over broken glass, orig. cor. buried on W. side of post, with brass cap mkd.

$\frac{1}{4}$
T39S R6W
S30|S29
1962

from which I mark

A yellow pine, 18 ins. diam., bears N. 75° W., 39 $\frac{1}{2}$ lks. dist., mkd. $\frac{1}{4}$ S30 BT.

A yellow pine, 13 ins. diam., bears S. 51° 30' E., 65 lks. dist., mkd. $\frac{1}{4}$ S29 BT.

Place collar of rock around cor.

Cor. is located 2 lks. W. of wire fence bearing N. and S.; dim unimproved roads along both sides of the fence; on a gradual W. slope, in scattered timber.

Remonumentation of Corners in T. 39 S., R. 6 W.

CHAINS

At the $\frac{1}{4}$ sec. cor. of secs. 17 and 20, which is mkd. by a white flintstone, 16x10x7 ins., loosely set in a small mound of stone, mkd. $\frac{1}{4}$ on N. face, witnessed by one bearing tree and stump of orig. tree:

A yellow pine, 34 ins. diam., bears S. 82° E., 121 lks. dist., blaze has been opened and shows scribe marks (record dist. 175 lks.)

A pine stump, 3 ft. high, 11 ins. diam., bears S. 77° W., 103 lks. dist., mkd. BT (record S. 79° W., 100 lks.).

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, over broken glass, with orig. cor. buried on N. side of post, with brass cap mkd.

T39S R6W

$\frac{1}{4}$ S17
S20
1962

from which I mark

A red cedar, 14 ins. diam., bears N. 14° 30' W., 34 lks. dist., mkd. $\frac{1}{4}$ S17 BT.

Raise a mound of stone around cor.

Cor. is located on SE. slope about 6 chs. dist. N. of U. S. Highway No. 189, and 3 lks. SE. of pole on telephone line bearing NE. and SW.

Remonumentation of Corners in T. 35 S., R. 6 W.

T. 35 S., R. 6 W., SL Mer., situated within the Dixie National Forest; the S. bdy. or Seventh Standard Parallel South, was surveyed by T. C. Bailey in 1874; the N. and W. boundaries, and the subdivisions were surveyed by Bailey and Burrill in 1874;

At the S.C. of secs. 33 and 34, on the S. bdy., which is mkd. by a volcanic stone, 18x14x12 ins., firmly set, mkd. with 3 notches on E. and W. and 6 notches on N. side, witnessed by a small scattered mound of stone on the N. side.

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, over broken glass, orig. cor. buried on S. side of post, with brass cap mkd.

S G
T35S R6W
S33|S34
1962

from which I mark

A pinon, 7 ins. diam., bears N. 73° W., 63 lks. dist., mkd. S33 BT.

Rebuild the mound of stone N. of cor.

Cor. is located in E. and W. wire fence

Remonumentation of Corners in T. 35 S., R. 6 W.

CHAINS

At the S. C. of secs, 31 and 32, on S. bdy. of Tp., which is mkd. by a volcanic stone, 17x13x12 ins., firmly set, mkd. with 1 notch on W. and 5 notches on E., and 6 notches on N. sides, witnessed by a small mound of stone N. of cor. and one orig. bearing tree:

A dead yellow pine, 22 ins. diam., bears N. 1° 30' E., 76 lks. dist., mks. legibile T35S R6 BT.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, over broken glass, orig. cor. buried on S. side of post, with brass cap mkd.

S C
T35S R6W
S31|S32
1962

from which I mark

A yellow pine, 8 ins. diam., bears N. 21° 30' E., 46 lks. dist., mkd. S32 BT.

A yellow pine, 11 ins. diam., bears N. 49° W., 57 lks. dist., mkd. S31 BT.

Cor. is located on N. slope in pine and aspen, about 4 chs. dist. S. of Little Coal Pit Wash and road.

At the cor. of secs. 29, 30, 31 and 32, which is mkd. by a volcanic stone, 18x10x4 ins., firmly set in circle of rock, mkd. with 1 notch on S. and 5 notches on E. edges, witnessed by one orig. bearing tree:

A yellow pine, 44 ins. diam., bears N. 10° E., 115 lks. dist., blaze has been opened and shows dim scribe mks. (record dist. 118 lks.).

There is no remaining evidence of the three aspen bearing trees.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, over broken glass, orig. cor. buried on N. side of post, with brass cap mkd.

T35S R6W
S30|S29
S31|S32
1962

from which I mark

A yellow pine, 8 ins. diam., bears N. 54° 30' E., 94 lks. dist., mkd. S29 BT.

Raise a mound of stone around cor.

Cor. is located on gradual NW. slope in aspen and scattered pine, S. 1.20 chs. from dim road bearing NE. and SW.

Remonumentation of Corners in T. 35 S., R. 6 W.

CHAINS

At the $\frac{1}{4}$ sec. cor. of secs. 29 and 32, mkd. by a volcanic stone, 40x18x5 ins., firmly set in a mound of stone, mkd. $\frac{1}{4}$ on N. face; there is no remaining evidence of the two aspen bearing trees.

At cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 6 ins. in the ground to rock, supported in a large mound of stone, 5 ft. base to top, over broken glass, orig. cor. set on SW. side of post, with brass cap mkd.

T35S R6W

$\frac{1}{4}$ S29
S32
1962

from which I mark

A red cedar, 8 ins. diam., bears N. 45° E., 68 lks. dist., mkd. $\frac{1}{4}$ S29 BT.

Cor. is located in sliderock, in bottom land of Coal Pit Wash, drains SE.; a road bearing nearly E-W, bears N. of cor. about 2 chs. dist.

Remonumentation of Corners in T. 36 S., R. 6 W.

T. 36 S., R. 6 W., SL Mer, situated within the Dixie National Forest; the N. bdy. (7th Std. Par. South) was surveyed by T. C. Bailey in 1874; the W. bdy. was surveyed by S. M. Richardson in 1884; the subdivisions were surveyed by Alfred B. Lewis in 1897.

At the closing cor. of secs. 3 and 4, on the N. bdy. of the Tp., which is mkd. by a volcanic stone, 18x9x8 ins., mkd. with 3 notches on one edge, no other mks. could be identified, lying on the ground at base of cedar post at cor. of wire fences bearing S. and W.; witnessed by a small mound of stone.

At cor. point at N. base of cedar post.

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, over broken glass, orig. cor. buried on E. side of post, with brass cap mkd.

T35S R6W

S34

S4 | S3

T36S R6W

C C

1962

Place collar of rock around cor.

Cor. is located on nearly level, open ground, at cor. of fences bearing S. and W. and about 2 chs. E. of dim road bearing NE. and SW.

By recorded tie this cor. is E. 12.20 chs. dist. from the SC of secs. 33 and 34.

Remonumentation of Corners in T. 36 S., R. 6 W.

At the cor. of secs. 16, 17, 20 and 21, which is mkd. by a volcanic stone, 14x10x8 ins., firmly set and mkd. with 3 notches on S. and 4 notches on E. edges, witnessed by a small scattered mound of stone around cor.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, over broken glass, orig. cor. buried on W. side of post, with brass cap mkd.

T36S R6W
S17|S16
S20|S21
1962

Place collar of rock around cor.

Cor. is located at fence cor., fences bear N., S. and E. on slight E. slope at SW. end of Rock Canyon flat and about 5 chs. N. of wash draining NE.

At the ¼ sec. cor. of secs. 16 and 17, which is mkd. by a limestone, 19x12x6 ins., firmly set, mkd. ¼ on W. face; from which orig. bearing trees:

A yellow pine, 20 ins. diam., bears N. 26° 30' E., 23 lks. dist., mkd. ¼ S BT.

A pine stump, 1 ft. high, 30 ins. diam., bears S. 19° W., 50 lks. dist.; no mks. remaining.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, over broken glass, orig. cor. buried on W. side of post, with brass cap mkd.

¼
T36S R6W
S17|S16
1962

from which I mark

A yellow pine, 22 ins. diam., bears N. 2° W., 64 lks. dist., mkd. ¼ S17 BT.

Cor. is located on gentle NW. slope, 3 lks. W. of N-S wire fence and about 5 chs. S. of an unimproved road bearing E. and SW.

At the cor. of secs. 8, 9, 16 and 17, which is mkd. by a lava stone, 14x8x7 ins., properly mkd., found lying on the ground at the cor. of wire fences bearing N., S. and E., witnessed by few scattered rock.

At cor. point, S. edge of cedar, cor. of fence post

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, over broken glass, orig. cor. buried on E. side of post, with brass cap mkd.

Remonumentation of Corners in T. 36 S., R. 6 W.

CHAINS

T36S R6W
S 8 | S 9
 S17 | S16
 1962

Place collar of rock around cor.

Cor. is located on level flat of Pass Creek in sagebrush, at cor. fences, about 12 to 15 chs. W. of unimproved road bearing N-S.

At the closing cor. of secs. 4 and 5, on N. bdy. of Tp., which is mkd. by a volcanic stone, 19x8x7 ins., firmly set in small mound of stone, mkd. with 2 notches on W. and 4 notches on E. sides (no CC on S. side), from which

A yellow pine, 27 ins. diam., bears S. 65° W., 258 lks. dist., only mks. showing R6W (record dist. 237 lks.)

A pine stump, 28 ins. diam., bears S. 74° E., 84 lks. dist.; no mks. remaining (record S. 76° E., 101 lks.).

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, over broken glass, with orig. cor. set on SE. side of post and supported in a large mound of stone, 6 ft. base to top, with brass cap mkd.

T35S R6W
S33
 S5 | S4
 T36S R6W
 C C
 1962

from which I mark

A yellow pine, 12 ins. diam., bears S. 2° W., 217 lks. dist., mkd. S5 BT.

Cor. is located on steep S. slope, 85 lks. N. of road, and 1.90 chs. dist. N. of Little Coal Pit Wash, drains E.

Remonumentation of Corner in T. 36 S., R. 7 W.

T. 36 S., R. 7 W., SL Mer., situated within the Dixie National Forest; the S., E. and W. boundaires and the subdivisions were surveyed by Shadrock M. Richardson in 1884.

At the cor. of secs. 35 and 36, on the S. bdy. of the Tp., which is mkd. by a lava stone, 17x10x9 ins., firmly set in small mound of stone, mkd. 1 notch on E. and 5 notches on W. sides; no other accessories.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, over broken glass, orig. cor. buried on N. side of post, with brass cap mkd.

Remonumentation of Corners in T. 36 S., R. 7 W.

CHAINS

T36S R7W
S35|S36
 S 2
 T37S
 1962

Raise a mound of stone, 2x2 ft. N. of cor. and place collar of rock around post.

Cor. is located on nearly level land in short sagebrush, about 8 chs. dist. E. of the E. edge of black lava flow bearing NW. and SE.

At the $\frac{1}{4}$ sec. cor. of sec. 13, on E. bdy. of Tp., which is mkd. by a sandstone, 14x8x6 ins., loosely set in small mound of stone, mkd. $\frac{1}{4}$ on W. face; from which

A stump hole at base of rotted pine trunk bears N. 45° W., 20 lks. dist.; no marks visible on trunk.

No evidence found of the other orig. bearing tree.

At cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, over broken glass, orig. cor. buried on N. side of post; with brass cap mkd.

T36S
 $\frac{1}{4}$
 R7W |
 S13 |
 1962

from which I mark

A yellow pine, 20 ins. diam., bears S. 81° 30' W., 41 lks. dist., mkd. $\frac{1}{4}$ S13 BT.

A yellow pine, 24 ins. diam., bears S. 87° E., 78 lks. dist., mkd. only BT.

Cor. is located on med. steep N. slope, 30 lks. S. of cor. of old wire fences bearing N. and E. and about 4 $\frac{1}{2}$ chs. S. of unimproved road in Rock Canyon, bearing nearly E-W.

At the $\frac{1}{4}$ sec. cor. of secs. 3 and 10, which is mkd. by a volcanic stone, 17x13x11 ins., firmly set, mkd. $\frac{1}{4}$ on N. face; from which

A pine, 33 ins. diam., bears S. 20° E., 82 lks. dist., mkd. $\frac{1}{4}$ S BT (record is S. 65 lks.).

A sawed pine stump, 2 ft. high, bears N. 75° W., 30 lks. dist., no marks remaining.

At cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, over broken glass, orig. cor. buried on N. side of post, with brass cap mkd.

Remonumentation of Corners in T. 36 S., R. 7 W.

CHAINS

T36S R7W

$$\frac{1}{4} \frac{S 3}{S 10}$$
 1962

from which I mark

A yellow pine, 7 ins. diam., bears N. 30° 30' E., 39½ lks. dist., mkd. ¼ S3 BT.

Raise a mound of stone around cor.

Cor. is located on a rocky NW. slope about 1 ch. E. of a ravine draining N. and about 2½ chs. dist. W. of a trail road bearing N-S.

T. 37 S., R. 6 W.

T. 37 S., R. 6 W., SL Mer., Utah, situated within the Dixie National Forest, was surveyed by Shadrock M. Richardson in 1884.

At the cor. of secs. 5, 6, 7 and 8, which is reestablished (cornerstone missing) from the NW. orig. bearing tree.

From reestablished cor. point

A yellow pine snag, 38 ins. diam., bears N. 42° 30' W., 60 lks. dist., mkd. T37S R6W BT.

A yellow pine, 29 ins. diam., bears S. 31° 30' E., 274 lks. dist., blaze has been opened, no legible marks could be identified (record dist. 200 lks.).

No evidence found of the NE. bearing tree.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, over broken glass deposit, with brass cap mkd.

$$\begin{array}{c} T37S R6W \\ \frac{S 6 | S 5}{S 7 | S 8} \\ 1962 \end{array}$$

from which I mark

A red cedar, 7 ins. diam., bears N. 24° W., 52 lks. dist., mkd. S6 BT.

Raise a mound of stone around cor.

Cor. is located on a gradual SW. slope, 34 lks. dist. E. of a N. and S. wire fence, and approx. ¼ mile N. of Mammoth Creek.

T. 37 S., R. 7 W.

T. 37 S., R. 7 W., SL Mer., Utah, situated in the Dixie National Forest; the E. bdy. was resurveyed and the E. portion of the subdivisions were surveyed by R. E. L. Collier, in 1895; the completion surveys of the subdivisions were executed by Alfred B. Lewis in 1897.

Re monumentation of Corners in T. 37 S., R. 7 W.

CHAINS

At the $\frac{1}{4}$ sec. cor. of sec. 1 on E. bdy. of the Tp., which is mkd. by a volcanic stone, 17x10x8 ins., firmly set and mkd. $\frac{1}{4}$ on W. face; witnessed by a small mound of stone on the W.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, over broken glass, orig. cor. buried on W side of post, with brass cap mkd.

$\frac{1}{4}$
T37S
S 1
R7W
1962

Rebuild the mound of stone W. of cor.

Cor. is located on a S. slope, under a N-S wire fence, in sagebrush, about 2 chs. N. of a small wash, drains SW.

The $\frac{1}{4}$ sec. cor. on the W. bdy. of sec. 6, T. 37 S., R. 6 W. bears S. 2.19 chs. dist.

At the closing cor. of secs. 1 and 2, on the N. bdy. of Tp., which is mkd. by a volcanic stone, 16x10x9 ins., firmly set, mkd. with 1 notch on E., 5 notches on W. and CC on S. sides, witnessed by few scattered stones; no evidence of pits or mound of earth.

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, over broken glass, orig. cor. buried on S. side of post, with brass cap mkd.

T36S R7W
S36
S2 | S1
T37S R7W
C C
1962

Place collar of rock around post.

Cor. is located on level flat in sagebrush, about 5 chs. N. of black lava flow and about 10 chs. W. of a road bearing NW. and SE.

At cor. of secs. 9, 10, 15 and 16, which is reestablished (cornerstone missing) from orig. bearing trees:

A dead yellow pine snag, 24 ins. diam., bears S. 8° 30' W., 90 lks. dist., mkd. T37S R7W S16 BT.

A sawed pine stump, 24 ins. diam., bears N. 77° 45' W., 30 lks. dist., no marks remaining.

A pine, 20 ins. diam., bears N. 33° E., 129 lks. dist., marks overgrown; I remark same S10 BT (rec. dist. 127 lks.).

Remonumentation of Corners in T. 37 S., R. 7 W.

CHAINS

There is no evidence of the SE. bearing tree.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground over broken glass, in a mound of stone, with brass cap mkd.

T37S R7W
 $\frac{S9}{S16} | \frac{S10}{S15}$
 1962

from which I mark

A yellow pine, 8 ins. diam., bears S. 69° E., 13 lks. dist., mkd. S15 BT.

A yellow pine, 13 ins. diam., bears S. 86° W., 85 lks. dist., mkd. S16 BT.

A yellow pine, 7 ins. diam., bears N. 60° W., $66\frac{1}{2}$ lks. dist., mkd. S9 BT.

Cor. is located on a SE. slope, 40 lks. dist. S. of good gravelled road bearing NW. to Mammoth Creek and SE. to State Highway No. 14, and about 2 chs. SE. of top of ridge bearing NE. and SW.

T. 35 S., R. 7 W.

T. 35 S., R. 7 W., 1st Mer., Utah is situated within the Dixie National Forest; the E. bdy. of Tp. was resurveyed; the N. and W. boundaries and all of the subdivisions were surveyed by Shadrock M. Richardson in 1884.

At the $\frac{1}{4}$ sec. cor. of secs. 19 and 24, on E. bdy. of Tp., which is mkd. by a volcanic stone, $15 \times 13 \times 8$ ins., loosely set in a small mound of stone, mkd. $\frac{1}{4}$ on W. face; no other accessories.

At cor. point

Set an iron post, 36 ins. long, 1 in. diam., 24 ins. in the ground, over broken glass, orig. cor. buried on S. side of post, with brass cap mkd.

T35S
 R7W R6W
 $\frac{1}{4}$
 $\frac{S24}{S19}$
 1962

Raise a mound of stone around cor.

Cor. is located under N-S wire fence on a gradual S. slope, about 2 chs. N. of a ditch, drains E.

At the cor. of secs. 13, 18, 19 and 24, on E. bdy. of Tp., which is mkd. by a volcanic stone, $20 \times 12 \times 11$ ins., firmly set, mkd. with 3 notches on N. and S. edges; no accessories.

At the cor. point

Remonumentation of Corners in T. 35 S. R. 7 W

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, over broken glass, orig. cor. buried on W. side of post, with brass cap mkd.

T358
R7W R6W
S13|S18
S24|S19
1962

Raise a small mound of stone around cor.

Cor. is located at N. edge of cedar post at cor. of wire fences bearing E., W. and S. and on N. edge of small water ditch draining SE.; old abandoned lumber shacks bear NE. about 2 chs. dist.

At the cor. of secs. 13, 14, 23 and 24, which is mkd. by a volcanic stone, 21x12x11 ins., mkd. with 3 notches on S. and 1 notch on E. edges, set in a mound of stone.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 14 ins. in the ground to rock, over broken glass, orig. cor. set on N. side of post, with brass cap mkd.

T358 R7W
S14|S13
S23|S24
1962

Raise a mound of stone, 4 ft. base to top, around cor.

Cor. is located on N. slope in short sagebrush, about 5 chs. N. of ridge.

At the ¼ sec. cor. of secs. 33 and 34, which is mkd. by a volcanic stone, 17x11x4 ins., firmly set, mkd. ¼ on W. face, witnessed by a small mound of stone on the E.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground to rock, over broken glass, orig. cor. buried on W. side of post, with brass cap mkd.

¼
T358 R7W
S33|S34
1962

Raise a mound of stone around cor.

Cor. is located on E. slope in dense tall sagebrush, about 20 chs. N. of Panguitch Lake.

At the cor. of secs. 27, 28, 33 and 34, which is mkd. by a crumbly volcanic stone, 18x10x7 ins., firmly set, dimly mkd. with 3 notches on E. edge, unable to identify marks on S. side; witnessed by a mound of stone, 3x2 ft. SW. of cor.

Remonumentation of Corners in T. 35 S., R. 7 W.

CHAINS

cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, over broken glass, orig. cor. buried on NW. side of post, with brass cap mkd.

T35S R7W
 S28 | S27
 S33 | S34
 1962

Place collar of rock around post.

Cor. is located on S. slope in sagebrush, about 2 chs. S. of top of ridge.

At the ¼ sec. cor. of secs. 27 and 34, which is mkd. by a volcanic stone, 18x7x4 ins., firmly set, mkd. ¼ on N. face; witnessed by a mound of stone W of cor.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, over broken glass, orig. cor. buried on N. side of post, with brass cap mkd.

T35S R7W
 ¼ S27
 S34
 1962

Place collar of rock around cor.

Cor. is located on gentle SE. slope in sagebrush, under N-S wire fence and N. 176 lks. dist. from cor. fences, bears N. and E.; a small wash draining SE. bears S. of cor. 60 lks. dist.

At the cor. of secs. 29, 30, 31 and 32, which is mkd. by a volcanic stone, 32x12x6 ins., set on top of ground, in a mound of stone, mkd. with 5 notches on E. side; no other mks. could be identified; from which orig. bearing trees:

A dead yellow pine, 21 ins. diam., bears N. 33° E., 51 lks. dist., blaze has been opened and shows dim scribe marks.

A yellow pine, 29 ins. diam., bears S. 12° W., 81 lks. dist., blazed, marks visible T35S S31 BT (this tree not recorded.)

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground to bedrock, over broken glass, orig. cor. set on N. side of post, supported in a large mound of stone to top, with brass cap mkd.

T35S R7W
 S30 | S29
 S31 | S32
 1962

from which I mark

CHAINS

Remonumentation of Corners in T. 35 S., R. 7 W.

A yellow pine, 8 ins. diam., bears N. 21° E., 21 lks. dist., mkd. S29 BT.

A yellow pine, 7 ins. diam., bears S. 50° E., 124 lks. dist., mkd. S32 BT.

A yellow pine, 8 ins. diam., bears N. 66° 30' W., 104½ lks. dist., mkd. S30 BT.

Cor. is located on nearly level bench, in scattered pines, about 10 chs. W. of dim track road, bears N. and SE.

T. 34 S., R. 7 W.

T. 34 S., R. 7 W., SL Mer., is situated within the Dixie National Forest; the W. bdy. was originally surveyed by A. J. Stewart in 1873, the W. bdy. was resurveyed and the subdivisions surveyed by Mathew H. Dalley in 1909.


At the NW. closing cor. of T. 34 S., R. 7 W., which is mkd. by a sandstone, 25x15x7 ins., firmly set, mkd. CC and 6 grooves on E., N., and S. faces; witnessed by two orig. bearing trees:

A pinon, 9 ins. diam., bears S. 23° 30' E., 54 lks. dist., mkd. T34S R7E S6 BT.

A pinon, 12 ins. diam., bears N. 46° E., 44 lks. dist., mkd. T33S R7E S31 BT.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, over broken glass, orig. cor. buried on S. side of post, with brass cap mkd.



Raise a mound of stone around cor.

Cor. is located on steep, rocky SW. slope in cedar and pinon, about 4 chs. dist. E. of road along E. side of Red Creek and about 75 lks. N. of small ravine, drains W.

Note: By record, the NE. cor. of T. 34 S., R. 8 W. bears N. 3.95 chs. dist. and the CC of Tps. 33 S., Rs. 7 and 8 E. bears E. 13.25 chs. dist.

At the closing cor. of secs. 6 and 7, on W. bdy. of T. 34 S., R. 7 W., which is mkd. by a sandstone, 20x12x8 ins., firmly set, mkd. with 5 grooves on S., 1 groove on N. and CC on E. faces; witnessed by two orig. bearing trees:

A pinon, 11 ins. diam., bears N. 83° 15' E., 78 lks. dist., mkd. T34S R7W S6 BT.

A juniper, 9 ins. diam., bears S. 76° 30' E., 58 lks. dist., mkd. T34S R7W S7 BT.

Remonumentation of Corners in T. 34 S., R. 7 W.

CHAINS

the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, over broken glass, orig. cor. buried on N. side of post, with brass cap mkd.

| | |
|-----|------|
| | T34S |
| R8W | S 6 |
| S 1 | S 7 |
| | R7W |
| | 1962 |

Place a mound of stone on the N side of post.

Cor. is located on steep N. slope, in dense oak brush and scattered pinon and cedar, about 50 lks. W. of N-S wire fence and about 10 chs. dist. S. of Red Creek.

T. 33 S., R. 7 W.

T. 33 S., R. 7 W., SL Mer. is situated within the Dixie National Forest; the SE. portion of the subdivisions were surveyed by A. J. Stewart in 1873; the completion survey of the subdivisions were executed by J. R. and Quinby Stewart in 1910.

At the cor. of secs. 13, 14, 23 and 24, of the "1873" survey, which is mkd. by a coarse granite stone, 17x8x4 ins., dimly mkd. with 1 notch on E. and 3 notches on S. edges, firmly set in the ground at cor. of fences; no accessories.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, over broken glass, orig. cor. buried on N. side of post, with brass cap mkd.

| | |
|--|-----------|
| | T33S R7W |
| | S14 S13 |
| | S23 S24 |
| | 1962 |

No accessories available.

Cor. is located at cor. of wire fences, bearing N., S., E. and W. and SW. 49 lks. dist. from the SW. cor. of Bear Valley Guard Station of the Forest Service.

H. E. S. No. 90

Homestead Entry Survey No. 90, located in surveyed secs. 4 and 5, T. 35 S., R. 1 E., SL Mer., within the Dixie National Forest, Utah, was surveyed by Angus M. Woodbury, Surveyor, Forest Service, in 1915. The subdivisions of the township were surveyed by the General Land Office in 1935 and 1937.

At cor. No. 1, H.E.S. No. 90, which is mkd. by a sandstone, 23x11x6 ins., firmly set in the ground, mkd. 1 HES 90 on side facing claim; from which orig. bearing trees:

A pinon, 18 ins. diam., bears N. 57° E., 56 lks. dist.;

A juniper, 18 ins. diam., bears S. 63° E., 122 lks. dist.; both trees mkd. X 1 HES 90 BT.

Remonumentation of Corners, HES No. 90, T. 35 S., R. 1 E.

CHAINS

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 28 ins. in the ground, over broken glass, with orig. cor. buried on S. side of post, with brass cap mkd.



Place collar of rock around cor.

Cor. is located in open ground, on slight SW. slope, 60 lks. E. of graveled road, bet. Widsoe and Escalante, on E. side of Birch Creek. By record: the cor. #1 HES No. 58 bears N. $16^{\circ} 29'$ E., 6.98 chs. dist.


At cor. No. 2, which is mkd. by a sandstone, 30x16x8 ins. found buried 1 ft. beneath surface, mkd. 2 HES 90, on side facing claim; witnessed by one orig. bearing tree:

A pinon, 12 ins. diam., bears N. $11^{\circ} 50'$ E., 109 lks. dist., mkd. X 2 HES 90 BT.

The other bearing tree has been destroyed by the road.

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, over broken glass, with orig. cor. buried on E. side of post, with brass cap mkd.



from which I mark

A cross (X) on top, and 2 HES 90 on W. face of sandstone outcrop showing 3x12x2 ft., bears N. 66° E., 115 lks. dist.

Cor. is located 8 lks. E. of wire fence bearing NW. and extends SE. for 55 lks. to cor., thence SW. along claim line, and is W. 50 lks. from road bet. Widsoe and Escalante, bears NW. and SE.

At cor. No. 3, which is mkd. by a sandstone, 28x10x6 ins. firmly set in ground at fence cor., mkd. 3 HES 90; from which

A stump hole, at base of fallen burnt pine, 48 ins. diam., bears S. 71° E., 116 lks. dist.; no marks remaining.


A rotted cottonwood stump, nearly level with ground, bears S. 74° E., 142 lks. dist.

At cor. point

Remonumentation of Corners, HES 90, T. 35 S., R. 1 E.

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, over broken glass, orig. cor. buried on N. side of post, with brass cap mkd.



from which I mark

A scrub juniper, 8 ins. diam., bears South 98 lks. dist., mkd. only 3 BT.

Cor. is located at cor. of wire fences bearing with claim lines, on gradual E. slope about 3 chs. W. of Birch Creek.


At cor. No. 4, which is mkd. by a sandstone, 28x8x6 ins., firmly set, mkd. 4 HES 90 on side facing claim; witnessed by a mound of stone, 3x2 ft., within claim, and two orig. bearing trees:

A pinon, 10 ins. diam., bears S. 19° W., 258 lks. dist.

A juniper, 10 ins. diam., bears N. 77° W., 216 lks. dist.; both trees mkd. X 4 HES 90 BT.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 26 ins. in the ground, over broken glass, orig. cor. buried on NE. side of post, with brass cap mkd.




Cor. is located in fence line at angle point, fences bear with claim lines in flat cleared land.

At cor. No. 5, which is mkd. by a sandstone, 25x12x8 ins., firmly set, mkd. 5 HES 90 in side facing claim; witnessed by a mound of stone, 3x2 ft. within claim, and one orig. bearing tree:

A yellow pine, 32 ins. diam., bears S. 79° 30' W., 232 lks. dist., mkd. X 5 HES 90 BT.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 26 ins. in the ground, over broken glass, orig. cor. buried on NE. side of post, with brass cap mkd.



Place collar of rock around cor.

Cor. is located on nearly level ground, on E. side of Corn Creek.

Remonumentation of Corners, HES 90, T. 35 S., R. 1 E.

CHAINS


At cor. No. 6, which is mkd. by a sandstone, 32x12x8 ins., firmly set, mkd. 6 HES 90 on side facing claim; from which orig. bearing trees:

A pinon, 14 ins. diam., bears S. 86° 45' E., 93 lks. dist.

A pinon, 7 ins. diam., bears N. 74° E., 67 lks. dist.; both mkd. X 6 HES 90 BT.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, over broken glass, orig. cor. buried on SE. side of post, with brass cap mkd.



Place collar of rock around post.

Cor. is located on steep N. slope, in fence bearing NW. along claim line, and about 80 lks. S. of Corn Creek.

At cor. No. 7, which is mkd. by a sandstone, 30x13x8 ins., firmly set in the ground, all marks have weathered off, except letter S., witnessed by a small mound of stone, and two orig. bearing trees:

A juniper, 16 ins. diam., bears S. 27° 15' E., 58 lks. dist.

A juniper, 8 ins. diam., bears N. 17° 45' E., 109 lks. dist.; both trees properly mkd.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, over broken glass, orig. cor. buried on S. side of post, with brass cap mkd.



Place collar of rock around cor.

Cor. is located in fence, on gradual S. slope in timber.

At cor. No. 8, which is mkd. by a sandstone, 34x16x10 ins., firmly set, all mks. have weathered off; witnessed by a mound of stone on the S. and 2 orig. bearing trees:

A juniper, 17 ins. diam., bears N. 32° E., 36 lks. dist.

A juniper, 24 ins. diam., bears N. 21° 30' W., 35 lks. dist.; both trees properly mkd.

At cor. point

Re monumentation of Corner, HES 90, T. 35 S., R. 1 E.

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, over broken glass, orig. cor. buried on S. side of post, with brass cap mkd.



Raise a mound of stone around cor.


Cor. is located on gentle S. slope, 24 ins. S. of wire fence, about parallel to claim lines and about 1 ch. N. of trail road, on N. side of Corn Creek.

At cor. No. 9 which is reestablished in its orig. position from bearing tree. The orig. monument, a granite stone, 26x15x13 ins., was found lying on the ground, mkd. ES 90, other marks broken off. From reestablished cor. point

A juniper, 14 ins. diam., bears N. 75° 20' W., 147 lks. dist., mkd. X9 HES 90 BT.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 26 ins. in the ground, over broken glass, orig. cor. buried on SW. side of post, with brass cap mkd.




Raise a mound of stone E. of cor.

Cor. is located on level, open ground, near old abandoned cabin.

At cor. No. 10, which is identical with cor. No. 2, H.E.S. No. 58, which is mkd. by a sandstone, 18x14x6 ins., firmly set, mkd. 10 HES 90 on SE side, and 2 HES 58 on NE side; no accessories.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 26 ins. in the ground, with orig. cor. buried on W. side of post, with brass cap mkd.



No accessories available.

Cor. is located at cor. of wire fences extending along all claim lines.

Blank

Page

CERTIFICATE OF SURVEY

I, **Andrew Nelson, Cadastral Surveyor**, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 15th day of **February**, 1961, I have remonumented corners in T. 39 S., R. 15 W., T. 37 S., R. 14 W., Tps. 35, 36, 37 and 39 S., R. 6 W., Tps. 33, 34, 35, 36 and 37 S., R. 7 W., and T. 35 S., R. 1 E. (H.E.S. No. 90).

of the **Salt Lake** Meridian, in the State of **Utah**, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the ~~Survey~~ **remonumentation** of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

April 22, 1963
(Date)
Salt Lake City, Utah

(Date)

Andrew Nelson
(Cadastral Surveyor)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT,
Washington, D. C.

The foregoing field notes of the remonumented corners in T. 39 S., R. 15 W., T. 37 R. 14 W., Tps. 35, 36, 37 and 39 S., R. 6 W., Tps. 33, 34, 35, 36 and 37 S. R. 7 W., and T. 35 S., R. 1 E. (H.E.S. 90).

executed by **Andrew Nelson, Cadastral Surveyor** having been critically examined and found correct, are hereby approved.

JUL 1 1964
(Date)

Ed Livingston
(Chief, Division of Engineering)

CERTIFICATE OF TRANSCRIPT

~~I CERTIFY That the foregoing transcript of the field notes of the above-described surveys in Utah, is a true copy of the original field notes.~~

~~_____
(Date)~~

~~_____
(Chief, Division of Engineering)~~

R570

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
ORIGINAL

367

FIELD NOTES

of the

Remonumentation of Corners in

Townships 11 North, Ranges 4 and 5 East,

Township 12 North, Range 4 East,

Township 13 North, Range 5 East,

and

Township 14 North, Range 4 East

DEPT. OF THE INTERIOR
BUREAU OF LAND MGMT

1962 JUN 17

00 00

Of the Salt Lake Meridian,

In the State of Utah

EXECUTED BY

Andrew Nelson, Cadastral Surveyor

Under special instructions dated February 15, 1961, which provided for the surveys
included under Group Number 447, approved February 16, 1961,
and assignment instructions dated April 27, 1962.

Survey commenced May 16, 1962

Survey completed June 7, 1962


INDEX DIAGRAM

Township _____, Range _____,

| | | | | | |
|----|----|----|----|----|----|
| 6 | 5 | 4 | 3 | 2 | 1 |
| 7 | 8 | 9 | 10 | 11 | 12 |
| 18 | 17 | 16 | 15 | 14 | 13 |
| 19 | 20 | 21 | 22 | 23 | 24 |
| 30 | 29 | 28 | 27 | 26 | 25 |
| 31 | 32 | 33 | 34 | 35 | 36 |


CORNER REMONUMENTATION
INDEX DIAGRAM

Township 11 North, Range 5 East, S. L. Meridian

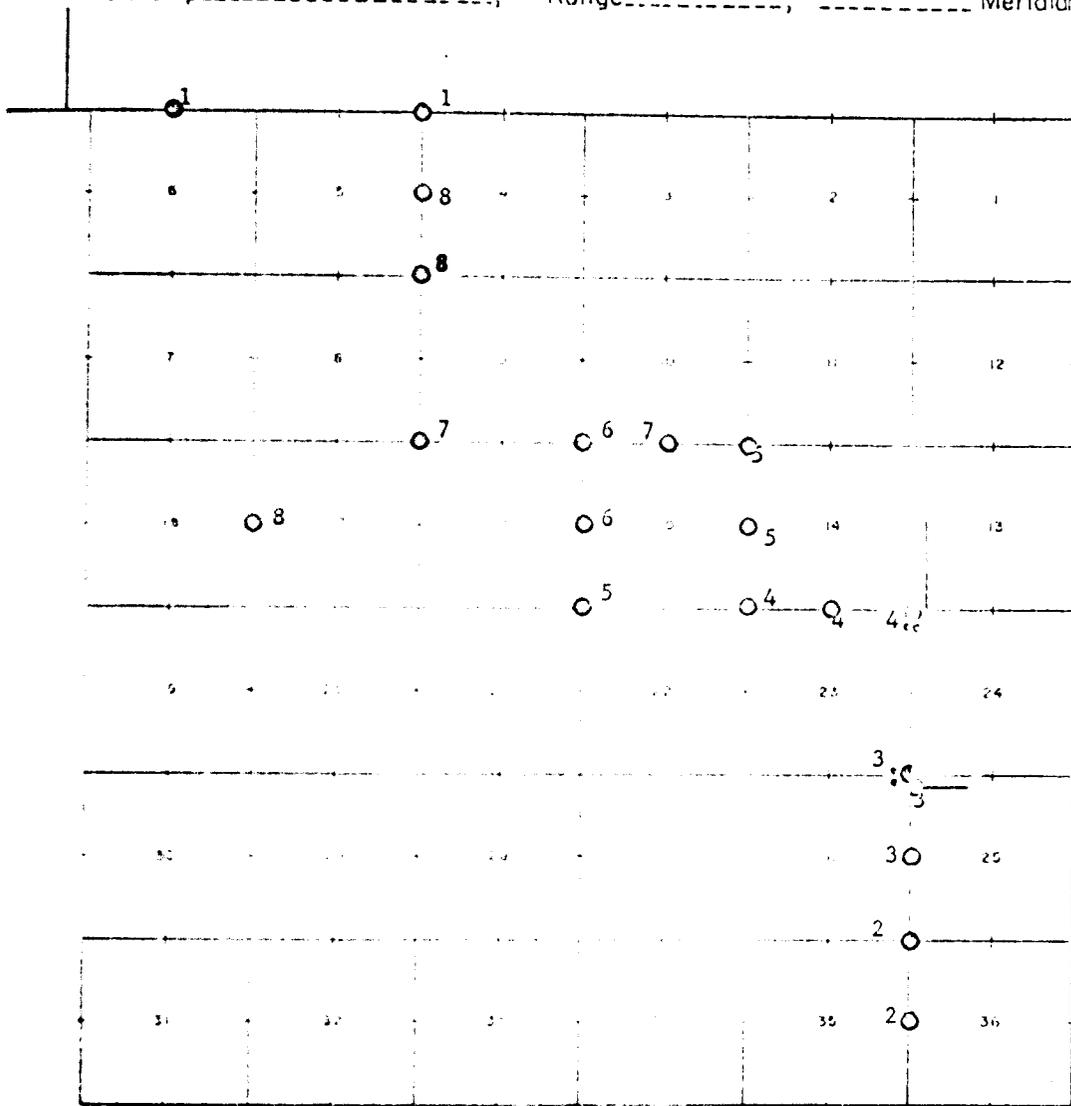


CORNER REMONUMENTATION
INDEX DIAGRAM

Township 11 North, Range 4 East, S. L. Meridian

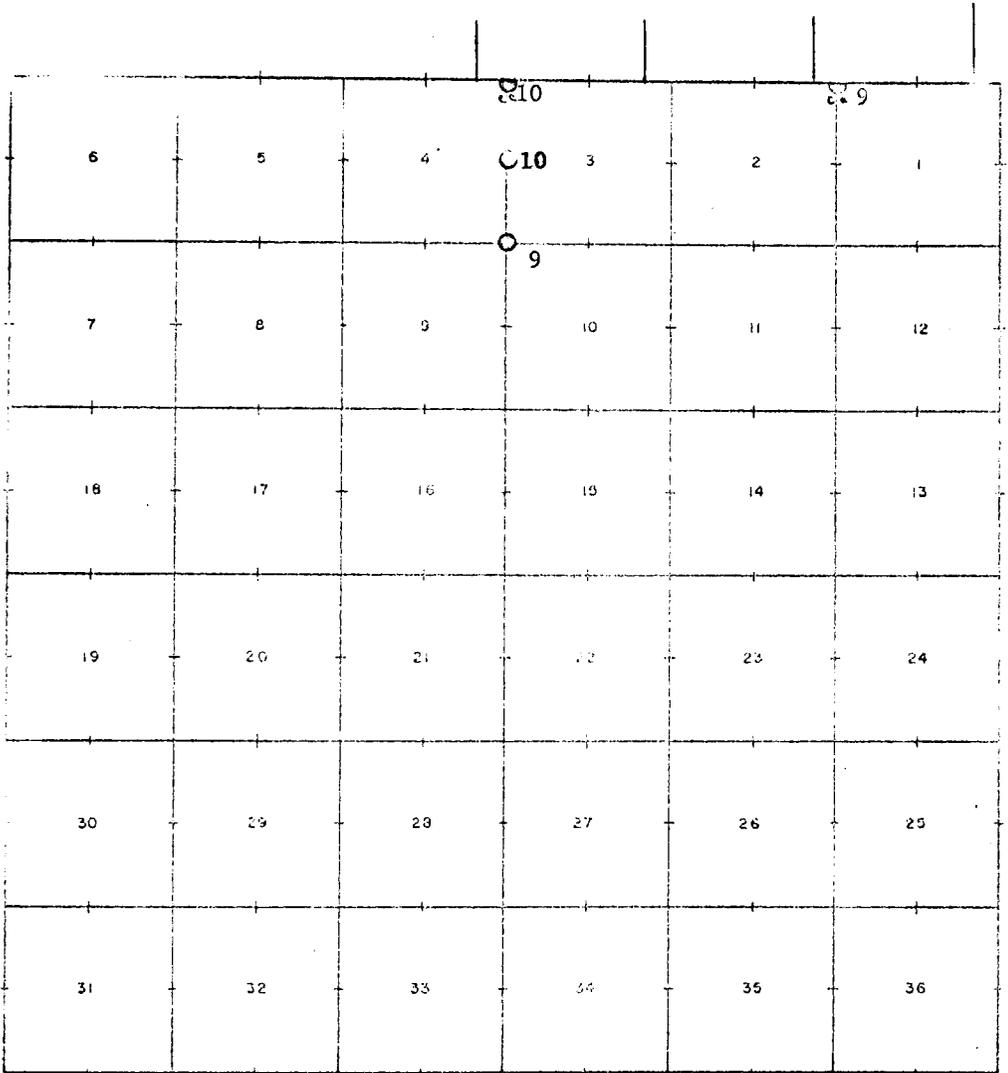


CORNER REMONUMENTATION
INDEX DIAGRAM

Township 12 North, Range 4 East, S. L. Meridian

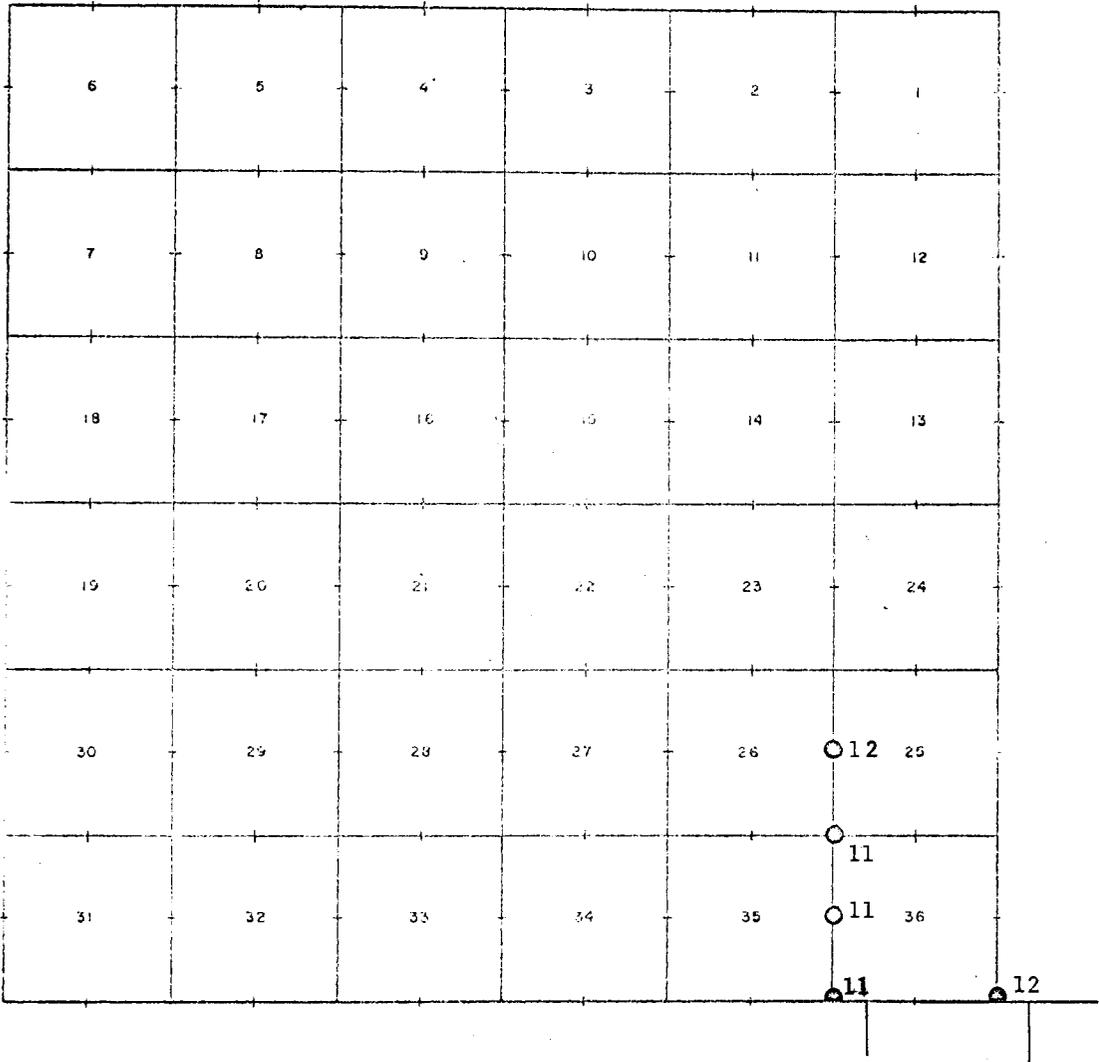


CORNER REMONUMENTATION INDEX DIAGRAM

Township 13 North, Range 5 East, S. L. Meridian

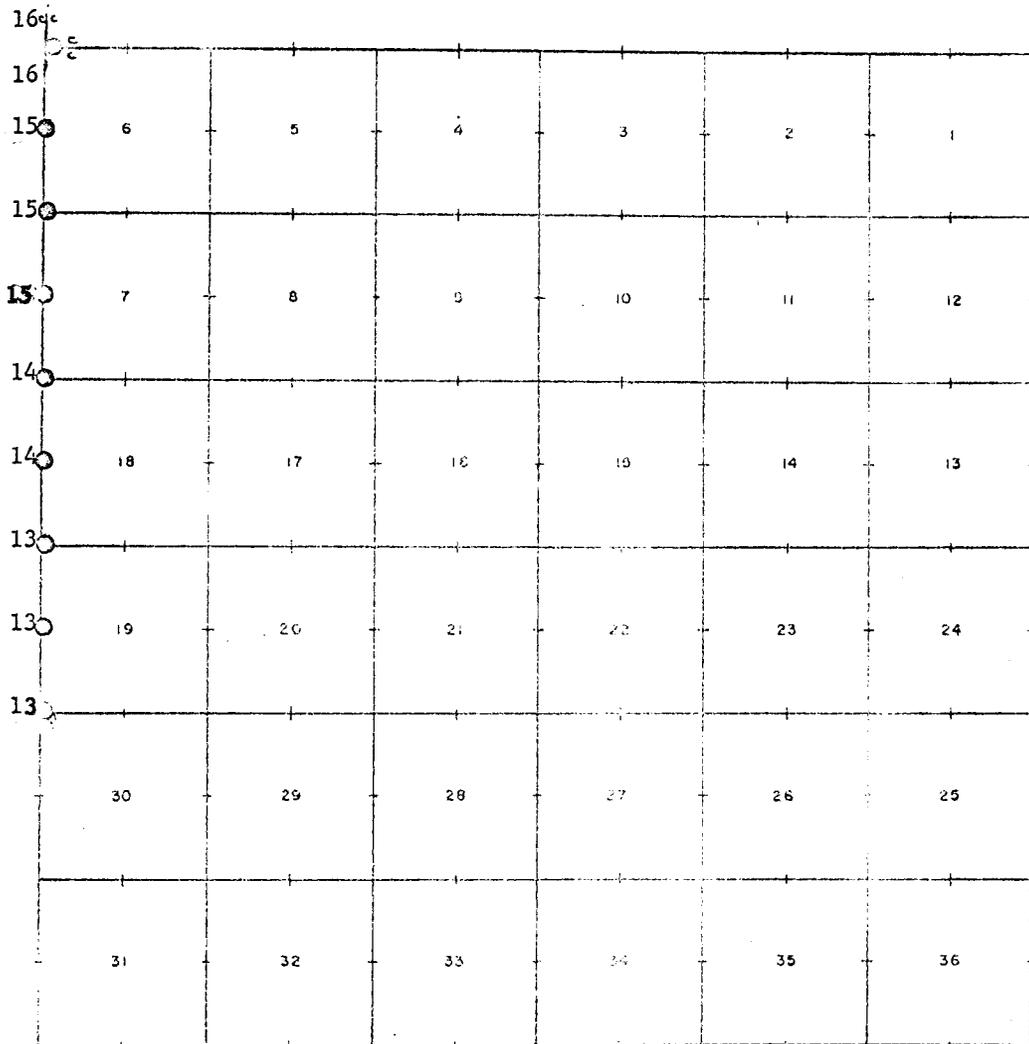

CORNER REMONUMENTATION INDEX DIAGRAM

Township 14 North, Range 4 East, S.L. Meridian

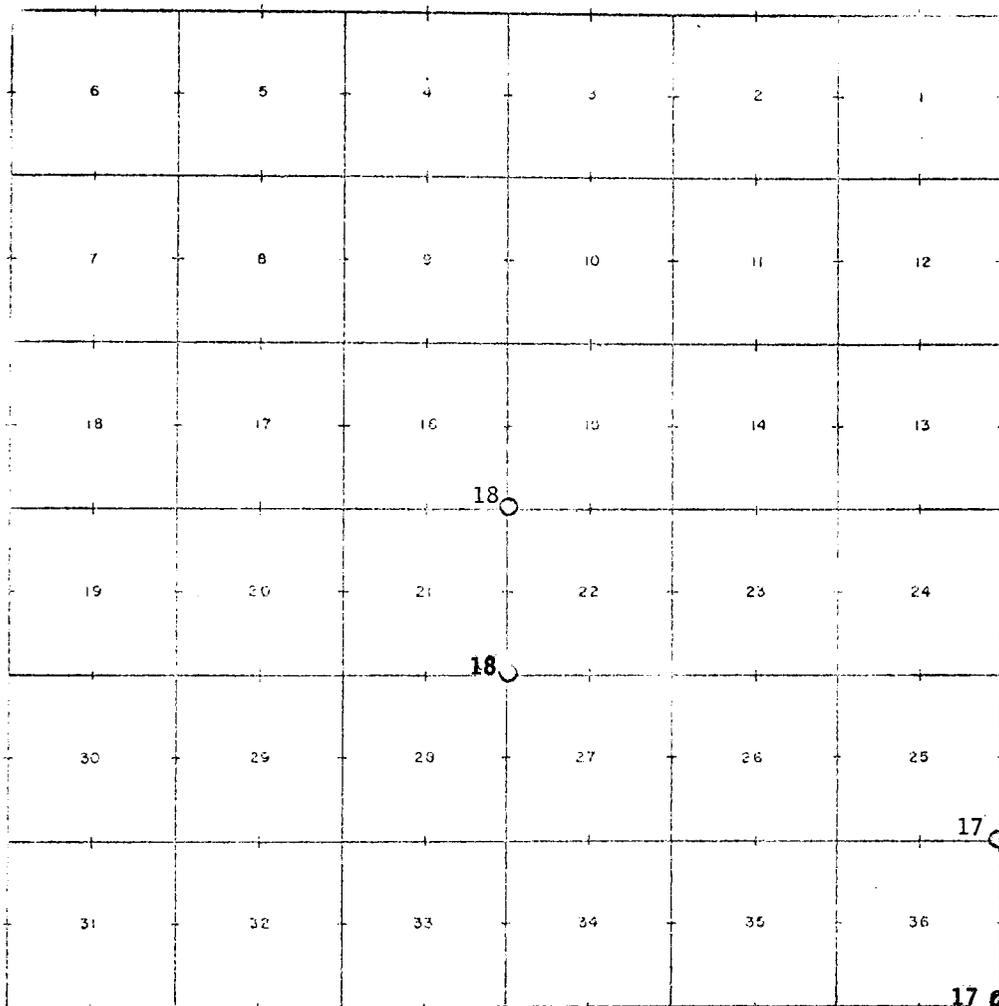

Re monumentation of Corners in T. 11 N., R. 5 E.

CHAINS

The following field notes are those of the remonumentation of certain identified original corners selected by the U. S. Forest Service as being adjacent to or controlling the boundaries of Forest Service lands located within the Cache National Forest in the following townships:

Tps. 11 N., Rs. 4 and 5 E.
 T. 12 N., R. 4 E.
 T. 13 N., R. 5 E.
 T. 14 N., R. 4 E., all in SL Mer., Utah

The position of each corner was marked by the original monument or determined from corner accessories recorded in the survey record. The remonumentation was requested by and accomplished in cooperation with the Forest Service.

T. 11 N., R. 5 E.

T. 11 N., R. 5 E., SL Mer., Utah, situated partly within the Cache National Forest; a portion of the subdivision (secs. 25 and 36) was surveyed by John G. Burrill, Deputy Surveyor, in 1875; the north boundary was surveyed by A. P. Hanson in 1896; the west boundary and the completion survey of the subdivision was surveyed by Hanson and Giers, in 1900.

At the cor. of secs. 4, 5, 32 and 33 on the N. bdy. of the Tp., which is mkd. by a limestone, 21x16x6 ins., firmly set in the ground, mkd. with 4 notches on the E. and 2 notches on the W. sides and witnessed by a small mound of stone W. of cor.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, over broken glass, and orig. cor. buried on N. side of post, with brass cap mkd.

T12N R5E
 S32 | S33
 S 5 | S 4
 T11N
 1962

Raise a mound of stone around and rebuild the mound of stone W. of cor.

Cor. is located on NE. slope in choke cherry brush.

At the ¼ sec. cor. of secs. 6 and 31, on N. bdy. of Tp., which is mkd. by a granite stone, 15x14x6 ins., firmly set, mkd. ¼ on S. face, witnessed by two stones.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, over broken glass, orig. cor. buried on N. side of post, with brass cap mkd.

T12N R5E
 ¼ S31
 S 6
 T11N
 1962

Remonumentation of Corners in T. 11 N., R. 5 E.

CHAINS

from which I mark

A white fir, 15 ins. diam., bears N. 67° 30' W., 64 lks. dist., mkd. $\frac{1}{4}$ S31 BT.

Place a collar of rock around post.

Cor. is located on gradual NE. slope, under E-W Forest Service wire fence, about 9 chs. dist. W. of cattleguard and road bears NE. and SW.

At the $\frac{1}{4}$ sec. cor. of secs. 35 and 36, which is mkd. by a sandstone 17x12x6 ins., firmly set, mkd. $\frac{1}{4}$ on W. face, and witnessed by few scattered rock.

At cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, over broken glass, orig. cor. buried on W. side of post, with brass cap mkd.

$\frac{1}{4}$
T11N R5E
S35|S36
1962

from which I mark

A fir, 9 ins. diam., bears S. 57° 30' W., 96 lks. dist., mkd. $\frac{1}{4}$ S35 BT.

Raise a mound of stone W. of cor. and raise collar of stone around post.

Cor. is located under N-S wire Forest Service fence in bottom of draw draining SE.; small aspen to S. and sagebrush to N. of cor.

At the cor. of secs. 25, 26, 35 and 36, which is mkd. by a sandstone, 14x9x8 ins., loosely set, mkd. with 1 notch on S. and E. edges and witnessed by a small mound of stone W. of cor.

At cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, over broken glass, orig. cor. buried on N. side of post, with brass cap mkd.

T11N R5E
S26|S25
S35|S36
1962

Raise a mound of stone W. and collar of rock around cor.

Cor. is located under N-S wire fence about 1 $\frac{1}{2}$ chs. N. of a spur and about 5 chs. S. of road in bottom of ravine, drains. E.

Remonumentation of Corners in T. 11 N., R. 5 E.

CHAINS

At the $\frac{1}{4}$ sec. cor. of secs. 25 and 26, which is mkd. by a flintstone, 14x9x8 ins., firmly set, mkd. $\frac{1}{4}$ on W. face and witnessed by a small scattered mound of stone W. of cor.

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, over broken glass, orig. cor. buried on W. side of post, with brass cap mkd.

$\frac{1}{4}$
T11N R5E
S26 | S25
1962

Rebuild mound of stone, W. and collar of rock around cor.

Cor. is located in N-S wire fence on med. steep open SW. slope.

At the cor. of secs. 24 and 25, which is mkd. by a sandstone, 13x13x6 ins., loosely set, mkd. with 2 notches on S. and 1 notch on E. edge, witnessed by a small scattered mound around cor.

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, over broken glass, orig. cor. buried on E. side of post, with brass cap mkd.

S26 | T11N
S24
S25
R5E
1962

Raise a mound of stone around cor.

Cor. is located in N-S wire fence, on med. steep N. slope, in sagebrush, about 3 chs. S. of shallow swale, near head, drains NE.

At the closing cor. of secs. 23 and 26, which is mkd. by a quartzite stone, 18x12x9 ins., loosely set; unable to identify any marks, witnessed by a deeply embedded mound of stone on W.

At cor. point

Set an iron post, 30 lks. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, over broken glass, orig. cor. buried on N. side of post, with brass cap mkd.

T11N |
S23 |
CC — S26 | S24
R5E |
1962

Rebuild mound of stone on W. and place collar of rock around cor.

This cor. is N. 1.08 chs. (measured) dist. from cor. secs. 24 and 25.

Remonumentation of Corners in T. 11 N., R. 5 E.

CHAINS

Cor. is located in N-S wire fence on N. slope in sagebrush.

At the closing cor. of secs. 23 and 24, which is mkd. by a red sandstone, 16x10x9 ins., firmly set, mkd. CC and 3 notches on S. and 1 notch on E. sides, witnessed by a small mound of stone S. of cor.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, over broken glass, orig. cor. buried on N. side of post, with brass cap mkd.

$$\begin{array}{c} \frac{S14}{S23|S24} \\ T11N R5E \\ C C \\ 1962 \end{array}$$

Rebuild mound of stone S. of cor.

Cor. is located on gradual NE. slope, W. 33 lks. dist. of the N. end of wire fence from S.

At the ¼ sec. cor. of secs. 14 and 23, which is mkd. by a limestone 17x10x9 ins., firmly set, mkd. ¼ on N. face, witnessed by a small mound of stone N. of cor.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, over broken glass, orig. cor. buried on S. side of post, with brass cap mkd.

$$\begin{array}{c} T11N R5E \\ \frac{1}{4} \frac{S14}{S23} \\ 1962 \end{array}$$

Rebuild enlarged mound of stone N. of cor.

At the cor. of secs. 14, 15, 22 and 23, which is mkd. by a sandstone, 17x12x6 ins., firmly set, mkd. with 3 notches on S. and 2 notches on E. edges, and witnessed by few scattered rock.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, over broken glass, orig. cor. buried on S. side of post, with brass cap mkd.

$$\begin{array}{c} T11N R5E \\ \frac{S15|S14}{S22|S23} \\ 1962 \end{array}$$

Raise a mound of stone W. of cor.

Cor. is located on steep open SW. slope.

Remonumentation of Corners in T. 11 N. R. 5 E.

CHAINS

At the $\frac{1}{4}$ sec. cor. of secs. 14 and 15, which is mkd. by a quartzite stone, 14x9x8 ins., firmly set, mkd. $\frac{1}{4}$ on W. face; no accessories. The orig. bearing trees have been destroyed in clearing right-of-way for new fence to be constructed.

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, over broken glass, orig. cor. buried on E. side of post, with brass cap mkd.

$\frac{1}{4}$
T11N R5E
S15|S14
1962

from which I mark

A lodgepole pine, 10 ins. diam., bears S. $86^{\circ} 30'$ E., 104 lks. dist., mkd. $\frac{1}{4}$ S14 BT.

A lodgepole pine, 8 ins. diam., bears S. 44° W., 24 lks. dist., mkd. $\frac{1}{4}$ S15 BT.

Cor. is located in bottom of swale, drains NE.

At the cor. of secs. 10, 11, 14 and 15, which is mkd. by a quartzite stone, 14x9x8 ins., firmly set, mkd. with 4 notches on S. and 2 notches on E. edges; no accessories and no evidence of the orig. bearing trees.

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, over broken glass, orig. cor. buried on S. side of post; with brass cap mkd.

T11N R5E
S10|S11
S15|S14
1962

Raise a mound of stone around cor.

Cor. is located on steep NW. slope.

At the cor. of secs. 15, 16, 21 and 22, which is mkd. by a sandstone, 12x12x9 ins., firmly set, mkd. with 3 notches on S. and E. edges, witnessd by two remaining orig. bearing trees:

A dead lodgepole pine, 7 ins. diam., bears N. 80° E., 8 lks. dist., mkd. T11N R5E S15 BT.

A lodgepole pine, 10 ins. diam., bears S. $46^{\circ} 30'$ W., 9 lks. dist., shows dim scribe marks, nearly overgrown.

There is no evidence of the other two bearing trees.

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, over broken glass, orig. cor. buried on N. side of post, with brass cap mkd.

Remonumentation of Corners in T. 11 N., R. 5 E.

CHAINS

T11N R5E
S16|S15
S21|S22
 1962

from which I mark

A pine, 10 ins. diam., bears N. 75° E., 52 lks. dist., mkd. S15 BT.

A pine, 11 ins. diam., bears S. 31° E., 58 lks. dist., mkd. S22 BT.

A pinon, 11 ins. diam., bears N. 38° 30' W., 33 lks. dist., mkd. S16 BT.

Cor. is located on an E. slope in dense lodgepole pine, about 4 chs. W. of road, bears N. and SE.

At the ¼ sec. cor. of secs. 15 and 16, which is mkd. by a sandstone, 18x9x5 ins., firmly set, mkd. ¼ on W. face and witnessed by few scattered rock on W. side.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, orig. cor. buried on W. side of post, with brass cap mkd.

¼
 T11N R5E
 S16|S15
 1962

from which I mark

A fir, 8 ins. diam., bears N. 88° 30' E., 89 lks. dist., mkd. ¼ S15 BT.

A fir, 12 ins. diam., bears N. 49° 30' W., 60 lks. dist., mkd. ¼ S16 BT.

Raise a mound of stone around cor.

Cor. is located on N. slope, 1 ch. N. of ridge bearing E-W, and at S. edge of fir and pine.

At the cor. of secs. 9, 10, 15 and 16, which is mkd. by a granite stone, 18x12x7 ins., firmly set, mkd. 4 notches on S. and 3 notches on E. edge, witnessed by a small mound of stone W. of cor.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, over broken glass, orig. cor. buried on N. side of post, with brass cap mkd.

T11N R5E
 S 9|S10
 S16|S15
 1962

Raise a mound of stone around and rebuild the mound of stone W. of cor.

Cor. is located on top of spur, slopes E. and at E. edge of scrub aspen.

on tation of Cor

CHAINS

At the $\frac{1}{4}$ sec. cor. of sec. 10 and 15, which is mkd. by a sandstone, 16x10x8 ins. firmly set, mkd. $\frac{1}{4}$ on N. face, from which

A pine, 19 ins. diam., bears S. 11° E., 22 lks. dist., shows old blaze, marks overgrown (record bearing S. 7° E.)

A pine stump, 11 ins. diam., bears N. $35^{\circ}30'$ E., 9 lks. dist., mkd. $\frac{1}{4}$ S10 BT.

At cor. point

Set an iron post, 30 ins. long $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, over broken glass, orig. cor. buried on E. side of post, with brass cap mkd.

T11N R5E

$\frac{1}{4}$ S10
S15
1962

from which I mark

A pine, 10 ins. diam., bears N. 14° E., $36\frac{1}{2}$ lks. dist., mkd. $\frac{1}{4}$ S10 BT.

A pine, 14 ins. diam., bears S. $36^{\circ}30'$ E., $56\frac{1}{2}$ lks. dist., mkd. $\frac{1}{4}$ S15 BT.

Cor. is located on steep E. slope in dense lodgepole pine, about 3 chs. dist. W. of draw and unimproved road.

At the cor. of sec. 8, 9, 16 and 17, which is mkd. by a sandstone, 17x11x10 ins., firmly set, mkd. with 4 notches on S. and E. edges, from which orig. bearing trees:

A pine, 11 ins. diam., bears N. 11° E., 41 lks. dist., marks overgrown.

A dead pine, 10 ins. diam., bears S. 33° E., 17 lks. dist., properly mkd. (record S. $44^{\circ}30'$ E., 18 lks.)

A dead pine, 11 ins. diam., bears S. 76° W., 23 lks. dist., properly mkd. (record bearing S. $62^{\circ}15'$ W.)

A pine, 12 ins. diam., bears N. $24^{\circ}30'$ W., 25 lks. dist., marks overgrown. I remark same S8 BT.

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, over broken glass, orig. cor. buried on W. side of post, with brass cap mkd.

T11N R5E

$\frac{S8}{S17}$ | $\frac{S9}{S16}$
1962

from which I mark

A pine, 7 ins. diam., bears N. 65° E., 62 lks. dist. mkd. S9 BT.

A pine, 10 ins. diam., bears S. 20° E., 31 lks. dist., mkd. S16 BT.

A pine, 12 ins. diam., bears S. 17° W., 37 lks. dist. mkd. S17 BT.

Remonumentation of Corner in T. 11 N., R. 5 E.

CHAINS

Place a collar of rock around post.

Cor. is located on N. slope in dense lodgepole pine, about $\frac{1}{2}$ ch. E. of draw, drains N.

At the cor. of secs. 4, 5, 8, and 9, which is marked by a sandstone, 18x8x6 ins., loosely set in a small mound of stone, marked with 5 notches on S. and 4 notches on E. edge; no accessories.

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, over broken glass, orig. cor. buried on W. side of post, with brass cap mkd.

| | |
|------|-----|
| T11N | R5E |
| S5 | S4 |
| S8 | S9 |
| 1962 | |

from which I mark

A lodgepole pine, 12 ins. diam., bears N. 61° E., 91 lks. dist., marked S4 BT.

And raise a mound of stone, around cor.

Corner is located on top of spur, slopes E.; in scattered scrub aspen and brush.

At the $\frac{1}{2}$ sec. cor. of secs. 4 and 5, which is marked by a sandstone, 14x10x10 ins., loosely set in a small mound of stone, marked $\frac{1}{2}$ on W. face; no other accessories.

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, over broken glass, orig. cor. buried on W. side of post; brass cap mkd.

| | |
|-----------------------|-----|
| T11N | R5E |
| S5 | S4 |
| $\frac{1}{2}$ 1962 | |

Raise a mound of stone, W. of cor.

Cor. is located on slight N. slope, 20 lks. E. of dim trail road and on W. edge of small aspen.

At the $\frac{1}{2}$ sec. cor. of secs. 17 and 18, which is mkd. by a sandstone, 16x9x7 ins., firmly set, mkd. $\frac{1}{2}$ on W. face; no accessories.

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, over broken glass, orig. cor. buried on W. side of post, with brass cap mkd.

Remonumentation of Corners in T. 11 N. R. 5 E

CHAINS

$\frac{1}{2}$
 T11N R5E
 S18|S17
 1962

Place 3 large rocks around post.

Cor. is located in flat basin, about 2 chs. E. of center of drain in meadow, drains N. about 8 chs. dist. to Bug Lake and about 2 chs. W. of unimproved road bearing N. and S.

T. 11 N., R. 4 E.

T. 11 N., R. 4 E., SL Mer., Utah is located within the Cache National Forest, Utah; the E. and N. boundaries and the subdivisions of the township were surveyed by Hanson and Giers, Deputy Surveyors, in 1900.

At the closing cor. of secs. 1 and 2, on the N. bdy. of the Tp., which is mkd. by a granite stone, 18x11x7 ins., firmly set in the ground, mkd. with CC on S., 1 notch on E. and 5 notches on W. sides, and witnessed by a scattered mound of stone S. of cor.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, over broken glass, orig. cor. buried on N. side of post, with brass cap mkd.

T12N R4E
S36
 S2|S1
 T11N R4E
 C C
 1962

Raise a mound of stone S. of cor.

Cor. is located 2 lks. N. of fence post at cor. of wire fences, bearing E., W. and S., on top of flat ridge bearing about E. and S. 80° W.

At the cor. of secs. 3, 4, 9 and 10, which is mkd. by a flintstone, 16x9x8 ins., firmly set, mkd. with 5 notches on S. and 3 notches on E. edges, witnessed by a small mound of stone W. of cor.; N. of the cor. stone, 7 lks. dist. is the Forest Reserve Boundary Post No. 41, an iron post, 4 ins. diam., showing 2 ft. above ground, properly mkd. as a witness cor. to the above cor.

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, over broken glass, orig. cor. buried on N. side of post, with brass cap mkd.

T11N R4E
S4|S3
 S9|S10
 1962

from which I mark

Remonumentation of Corners in T. 12 N., R. 4 E.

CHAINS

An aspen, 9 ins. diam., bears S. 38° W., 34½ lks. dist., mkd. S9 BT.

Raise a mound of stone around cor.

Cor. is located on gentle NW. slope in sagebrush, deer browse and scattered clumps of aspen.

At the ¼ sec. cor. of secs. 3 and 4, which is mkd. by a sandstone, 17x12x6 ins., firmly set in the ground, dimly mkd. ¼ on W. face, witnessed by deeply embedded mound of stone, 2x1 ft. W. of cor.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, over broken glass, orig. cor. buried on E. side of post, with brass cap mkd.

¼
T11N R4E
S4 | S3
1962

Place collar of rock around post.

Cor. is located on steep NE. slope in sagebrush, about 8 chs. dist. S. of Saddle Creek, and about 10 chs. S. of road.

At the closing cor. of secs. 3 and 4, on N. bdy. of Tp., which is mkd. by a sandstone, 14x14x11 ins., firmly set in the ground, mkd. CC on S., 3 notches on E. and W. sides, and witnessed by few scattered stone on the S. side; a Forest Reserve Boundary Post, No. 42, iron post 4" diam., showing 16" above ground, properly mkd. as a witness cor. to this cor. bears E. 6 lks. dist.

At cor. point,

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, over broken glass, orig. cor. buried on E. side of post, with brass cap mkd.

T12N
S34
S4 | S3
T11N R4E
C C
1962

Raise a small mound of stone around cor.

Cor. is located on steep E. slope in chokecherry and sagebrush and scattered scrub aspen, about ¼ mi. W. of Saddle Creek.

T. 12 N., R. 4 E.

T. 12 N., R. 4 E., SL Mer., located within the Cache National Forest, Utah; the S. bdy. and the subdivisions of the township were surveyed by Hanson and Giers in 1900.

At the cor. of secs. 35 and 36, on the S. bdy. of the Tp.,

Remonumentation of Corners in T. 12 N. R. 4 E.

CHAINS

which is mkd. by a quartzite stone, 16x10x6 ins., firmly set, mkd. with 1 groove on E. and 5 grooves on W. faces. witnessed by few rock W. of cor.; N. 6 lks. dist. is a Forest Reserve Boundary Post, 4 ins. diam., showing 2 ft. above ground, with brass cap missing.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, over broken glass, orig. cor. buried on N. side of post, with brass cap mkd.

T12N R4E
S35|S36
 S 2
 T11N R4E
 1962

Place a collar of rock around post.

Cor. is located on open NE. slope, 6 lks. SW. of cor. of wire fences bearing N. and E.

At the ¼ sec. cor. of secs. 35 and 36, which is mkd. by a sandstone, 13x12x6 ins., firmly set in the ground, mkd. ¼ on W. face and witnessed by a small mound of stone W. of cor.

At cor. point,

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, over broken glass, orig. cor. buried on S. side of post, with brass cap mkd.

¼
 T12N R4E
 S35|S36
 1962

Raise a mound of stone around cor.

Cor. is located on steep S. slope in sagebrush, E. 37 lks dist. from N-S wire fence and about 3 chs. dist. N. of small reservoir in draw, drains W.

At the cor. of secs. 25, 26, 35 and 36, which is mkd. by a sandstone 17x7x6 ins., firmly set, mkd. 1 notch on S. and E. edges, and witnessed by small scattered mound of stone on the W.; E. 6 lks. dist. is Forest Reserve Boundary Post No. 46, an iron post, 4 ins. diam., showing 16 ins. above ground, brass cap properly mkd. as a witness cor. to the above cor.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, over broken glass, orig. cor. buried on N. side of post, with brass cap mkd.

T12N R4E
S26|S25
S35|S36
 1962

Remonumentation of Corners in T. 12 N., R. 4 E.

CHAINS

Raise a mound of stone around cor.

Cor. is located on gentle N. slope in sagebrush, at cor. of wire fences bearing S. and E.

At the $\frac{1}{4}$ sec. cor. of secs. 25 and 26, which is mkd. by a sandstone, 20x14x7 ins., firmly set, mkd. $\frac{1}{4}$ on W. face and witnessed by a small mound of stone W. of cor.

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, over broken glass, orig. cor. buried on E. side of post, with brass cap mkd.

$\frac{1}{4}$
T12N R4E
S26 | S25
1962

Rebuild mound of stone on W. and place collar of rock around post.

Cor. is located on gradual S. slope, in sagebrush, S. 20 lks. dist. from a trail road and S. $1\frac{1}{2}$ chs. dist. of E-W wire fence; Mahogany Spring bears ab. S. 75° E., 5 chs. dist., and a draw, draining W. bears S. about 4 chs. dist.

At the cor. of Tps. 12 N., Rs. 4 and 5 E., which is mkd. by a granite stone, 15x8x11 ins., firmly set, mkd. with 6 grooves on N., E. and W., T12 N on NE., R5E on SE. and R4E on SW. sides; witnessed by a mound of stone, 2x1 $\frac{1}{2}$ ft. S. of cor.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, over broken glass, orig. cor. buried on S. side of post, with brass cap mkd.

T12N
R4E R5E
S36 | S31
S 1
T11N R4E
1962

Place a collar of rock around and rebuild mound of stone S. of cor.

Cor. is located 1 lk. S. of cedar post at cor. of wire fences, bearing N. and E., on slight NW. open slope, about $\frac{1}{2}$ ch. dist. W. of divide ridge, bears N. and S.

T. 13 N., R. 5 E.

T. 13 N., R. 5 E., SL Mer., Utah; the E. bdy. of the Cache National Forest follows along the W. bdy. of the Tp.; the survey of the W. bdy., a portion of the N. and S. boundaries, and a portion of the subdivisions along W. side of the Tp. were surveyed by A. P. Hanson, Deputy Surveyor, in 1896, as shown upon plat approved September 9, 1897.

Remonumentation of Corners in T. 12 N. R. 4 E.

CHAINS

At the cor. of secs. 19, 24, 25 and 30 on the W. bdy. of Tp., which is mkd. by a sandstone, 13x9x6 ins., firmly set, mkd. with 2 grooves on S. and 4 grooves on N. faces, witnessed by a small mound of stone W. of cor. No evidence of aspen bearing trees; N. 6 lks. dist. is the Forest Reserve Boundary Post, No. 58, an iron post, 4 ins diam., showing 2 ft. above ground, with brass cap properly mkd. as a witness cor. to the above cor.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, over broken glass, orig. cor. buried on N. side of post, with brass cap mkd.

T13N
R4E R5E
S24 | S19
S25 | S30
1962

from which I mark

An aspen, 6 ins. diam., bears S. 83° W., 16 lks. dist., mkd. S25 BT.

An aspen, 8 ins. diam., bears S. 88° E., 33 lks. dist., mkd. S30 BT.

Cor. is located on steep N. slope in dense aspen and brush and in N-S wire fence.

At the ¼ sec. cor. of secs. 19 and 24, which is mkd. by a sandstone 17x12x6 ins., firmly set, mkd. ¼ on W. face, and witnessed by a small mound of stone W. of cor.; no evidence found of aspen bearing trees.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, over broken glass, orig. cor. buried on E. side of post, with brass cap mkd.

T13N
¼
R4E R5E
S24 | S19
1962

from which I mark

An alpine fir, 14 ins. diam., bears S. 63°30' W., 66 lks. dist., mkd. ¼ S24 BT.

Cor. is located on W. edge of N-S pole fence, on an E. slope, in aspen and few scattered fir.

At the cor. of secs. 13, 18, 19 and 24, on W. bdy. of Tp., which is mkd. by a quartzite stone, 18x10x8 ins., loosely set, unable to identify any marks, witnessed by a deeply embedded mound of stone W. of cor.; S. 6 lks. dist. is the Forest Reserve Boundary Post, No. 59, an iron post, 4 ins. diam., showing 2 ft. above ground, with brass cap properly mkd. as a witness cor. to the above cor.

Remonumentation of Corners in T. 13 N., R. 5 E.

CHAINS

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, over broken glass, orig. cor. buried on N. side of post, with brass cap mkd.

T13N
R4E R5E
S13 | S18
S24 | S19
1962

Place collar of rock around cor.

Cor. is located in N-S pole fence, on a gradual E. slope N. 1.20 chs. dist. from gate and dim road.

At the $\frac{1}{4}$ sec. cor. of secs. 13 and 18, on W. bdy. of Tp., which is mkd. by a quartzite stone, 24x12x6 ins., firmly set, mkd. $\frac{1}{4}$ on W. face and witnessed by few scattered rock W. of cor.

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, over broken glass, orig. cor. buried on N. side of post, with brass cap mkd.

T13N
 $\frac{1}{4}$
R4E R5E
S13 | S18
1962

Raise a mound of stone around cor.

Cor. is located 2 lks. W. of N-S wire fence on top of flat rise in heavy brush.

At the cor. of secs. 7, 12, 13 and 18, on W. bdy. of Tp., which is mkd. by a quartzite stone, 18x8x7 ins., firmly set, mkd. with 2 grooves on N. and 4 grooves on S. faces, witnessed by a small mound of stone W. of cor.; N. 6 lks. dist. is Forest Reserve Boundary Post No. 60, an iron post 4 ins. diam., showing 20 ins. above ground, brass cap properly mkd. as a witness cor. to the above cor.

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, over broken glass, orig. cor. buried on S. side of post, with brass cap mkd.

T13N
R4E R5E
S12 | S7
S13 | S18
1962

Place collar of rock around post.

Cor. is located 1 lk. W. of metal fence post in N-S wire fence and 1.10 chs. dist. S. of gate and dim road bearing

Re monumentation of Corners in T. 13 N

CHAINS

NE. and SW. on a gradual NE. slope in sagebrush.

At the $\frac{1}{4}$ sec. cor. of secs. 7 and 12, on W. bdy. of Tp., which is mkd. by a quartzite stone, 17x10x9 ins., firmly set, mkd. $\frac{1}{4}$ on W. face and witnessed by a small mound of stone W. of cor.

At cor. point

Set an iron post, 30 lks. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, over broken glass, orig. cor. buried on E. side of post, with brass cap mkd.

T13N
 $\frac{1}{4}$
 R4E R5E
 S12|S7
 1962

Raise a small mound of stone around cor.

Cor. is located in N-S wire fence, on a gradual SE. to E. slope, in service and chokecherry brush.

At the cor. of secs. 1, 6, 7 and 12, on W. bdy. of Tp., which is mkd. by a rough sandstone, firmly set, dimly mkd. with 1 groove on S. and 5 grooves on N. faces, witnessed by a scattered mound of stone; N. 35° E., $5\frac{1}{2}$ lks. dist. is Forest Reserve Boundary Post No. 61, an iron post, 4 ins. diam., showing 18 ins. above ground, properly mkd. as a witness cor. to above cor.

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, over broken glass, orig. cor. buried on E. side of post, with brass cap mkd.

T13N
 R4E R5E
 S1|S6
 S12|S7
 1962

Raise a mound of stone around cor.

Cor. is located 5 lks. W. of N-S wire fence, on a gradual E. slope, in small aspen.

At the $\frac{1}{4}$ sec. cor. of secs. 1 and 6, on W. bdy. of Tp., which is mkd. by a quartzite stone, 17x12x6 ins., firmly set, mkd. $\frac{1}{4}$ on W. face, and witnessed by a small, scattered mound of stone, W. of cor.

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, over broken glass, orig. cor. is buried on E. side of post, with brass cap mkd.

Remonumentation of Corners in T. 13 N., R. 5 E.

CHAINS

T13N
 $\frac{1}{4}$
 R4E R5E
 S1 | S6
 1962

Raise a mound of stone around cor.

Cor. is located in N-S wire fence about 13 chs. dist. S. of a gate and junction of fence from the E., on a gradual E. slope, scattered aspen to N. and E. of cor., opening to SW.

At the closing cor. of Tps. 13 and 14 N., R. 5 E., which is mkd. by a sandstone, 16x9x6 ins., firmly set, mkd. with 6 grooves on N. and S. and 6 grooves and CC on E. face, witnessed by a mound of stone around cor.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 14 ins. in the ground to rock, over broken glass, orig. cor. set on E. side of post; with brass cap mkd.

T14N
 R5E
 T13N | S31 C
 R4E | S 6 C
 S1 | T13N
 R5E
 1962

Raise a large mound of stone to top around cor.

Cor. is located in N-S wire fence, on gradual NE. slope in opening, with scattered clumps of aspen.

At the NE. closing cor. of T. 13 N., R. 4 E., which is mkd. by a granite stone, 22x15x12 ins., firmly set, mkd. with 6 grooves on E., W. and S. faces, and CC on N. side, witnessed by few scattered rock.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground to rock, over broken glass, orig. cor. set on E. side of post, with brass cap mkd.

T14N R4E
 S36
 S1 | T14N
 T13N | R5E
 R4E | S31
 C C
 1962

Raise a large mound of stone to top around cor.

Cor. is located in N-S wire fence on gradual E. slope, in scattered aspen,

This cor. is W. 3.25 chs. dist. from the SE. cor. of T. 14 N., R. 4 E.

Remonumentation of Corners in T. 14 N

CHAINS

T. 14 N., R. 4 E.

T. 14 N., R. 4 E., SL Mer., Utah, is located within the Cache National Forest; the E., W. and S. boundaries and the subdivisions of the township were surveyed by J. H. Martineau, Deputy Surveyor, in 1881; the E. bdy. was re-surveyed by A. P. Hanson in 1896.

At the SE. cor. of T. 14 N., R. 4 E., which is mkd. by a sandstone 12x12x10 ins., firmly set in the ground, mkd. with 6 grooves on N. and W. faces and witnessed by a small mound of stone NW. of cor.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, over broken glass, orig. cor. buried on SE. side of post, with brass cap mkd.

| | |
|------|------|
| T14N | |
| R4E | T14N |
| S36 | R5E |
| | S31 |
| | 1962 |

from which I mark

An aspen, 5 ins. diam., bears N. 17° W., 15 lks. dist., mkd. S36 BT.

Raise a mound of stone around cor.

Cor. is located on an E. slope in medium dense small aspen and chokecherry bush.

At the cor. of secs. 25 and 36, on E. bdy. of Tp., which is mkd. by a quartzite stone, 17x10x8 ins., firmly set in the ground, mkd. with 1 notch on S. and 5 notches on N. edges, and witnessed by a scattered mound of stone W. of cor.

At cor. point,

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, over broken glass, orig. cor. buried on W. side of post, with brass cap mkd.

| | |
|------|------|
| T14N | R5E |
| S25 | S30 |
| S36 | |
| R4E | |
| | 1962 |

Raise a mound of stone, 3x2 ft. W. of cor. and place a collar of rock around post.

Cor. is located in N-S wire fence, on open, rocky N. slope, about 5 chs. dist. N. of top of ridge.

At the cor. of secs. 21, 22, 27 and 28, which is mkd. by a blue limestone, 21x13x4 ins., firmly set in mound of stone, mkd. with 2 grooves on S. and 3 grooves on E. faces; no evidence found of the two orig. bearing trees.

Remonumentation of Corners in T. 14 N., R. 4 E.

CHAINS

At cor. point.

Set an iron post, 30 ins. long, 2½ ins. diam., 4 ins. in the ground to bedrock, over glass, orig. cor. set on S. side of post, and supported in a large mound of stone to top, with brass cap mkd.

| | |
|----------|-----|
| T14N R4E | |
| S21 | S22 |
| S28 | S27 |
| 1962 | |

from which I mark

A Douglas Fir, 14 ins. diam., bears S. 31° W.,
79 lks. dist., mkd. T14N R4E S28 BT.

A lodgepole pine, 13 ins. diam., bears N. 57° W.,
120 lks. dist., mkd. S21 BT.

Cor. is located on flat spur sloping SE., in scattered fir, about 25 chs. dist. W. of U. S. Highway No. 89, bet. Logan and Garden City.

At the cor. of secs. 15, 16, 21 and 22, which is mkd. by a limestone, 16x13x13 ins., firmly set, mkd. with 3 grooves on S. and E. edges, and witnessed by a mound of stone, 3x1½ ft. W. of cor.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, over broken glass, orig. cor. buried on NE. side of post, with brass cap mkd.

| | |
|----------|-----|
| T14N R4E | |
| S16 | S15 |
| S21 | S22 |
| 1962 | |

Place collar of rock around post.

Cor. is located on gradual NE. slope in sagebrush, about 1½ chs. dist. S. of draw draining SE. and about 7 chs. S. of U. S. Highway No. 89. State road equipment shed bears NW. about ¼ mile dist.

CERTIFICATE OF SURVEY

I, **Andrew Nelson, Cadastral Surveyor**, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the **15th** day of **February**, 1961, I have **remonumented corners in Tps. 11 N., Rs. 4 and 5 E., Tp. 12 N., R. 4 E. Tp. 13 N., R. 5 E., and Tp. 14 N., R. 4 E.**

of the **Salt Lake** Meridian, in the State of **Utah**, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual **remonumentation** of Instructions for the ~~Survey~~ of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

April 22, 1963
(Date)
Salt Lake City, Utah

Andrew Nelson
(Cadastral Surveyor)

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT,
Washington, D. C.

The foregoing field notes of the **remonumented corners in Tps. 11 N., Rs. 4 and 5 E. Tp. 12 N., R. 4 E., Tp. 13 N., R. 5 E., and Tp. 14 N., R. 4 E.**

executed by **Andrew Nelson, Cadastral Surveyor** having been critically examined and found correct, are hereby approved.

JUL 1 1964
(Date)

E. E. Livingston
(Chief, Division of Engineering)

CERTIFICATE OF TRANSCRIPT

~~I CERTIFY That the foregoing transcript of the field notes of the above-described surveys in **Utah**, is a true copy of the original field notes.~~

~~_____
(Date)~~

~~_____
(Chief, Division of Engineering)~~

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

ORIGINAL

394

FIELD NOTES

of the

Remonumentation of Corners in

Township 6 South, Range 4 East

and

Township 8 South, Range 4 East

1964 JUL 17 10 00 AM
DEPT. OF THE INTERIOR
BUREAU OF LAND MGMT

Of the Salt Lake Meridian,

In the State of Utah

EXECUTED BY

Andrew Nelson, Cadastral Surveyor


Under special instructions dated February 15, 1961, which provided for the surveys
included under Group Number 447, approved February 16, 1961,
and assignment instructions dated April 27, 1962.

Survey commenced May 29, 1962

Survey completed June 1, 1962


INDEX DIAGRAM

Township 6 South, Range 4 East S.L. Mer.

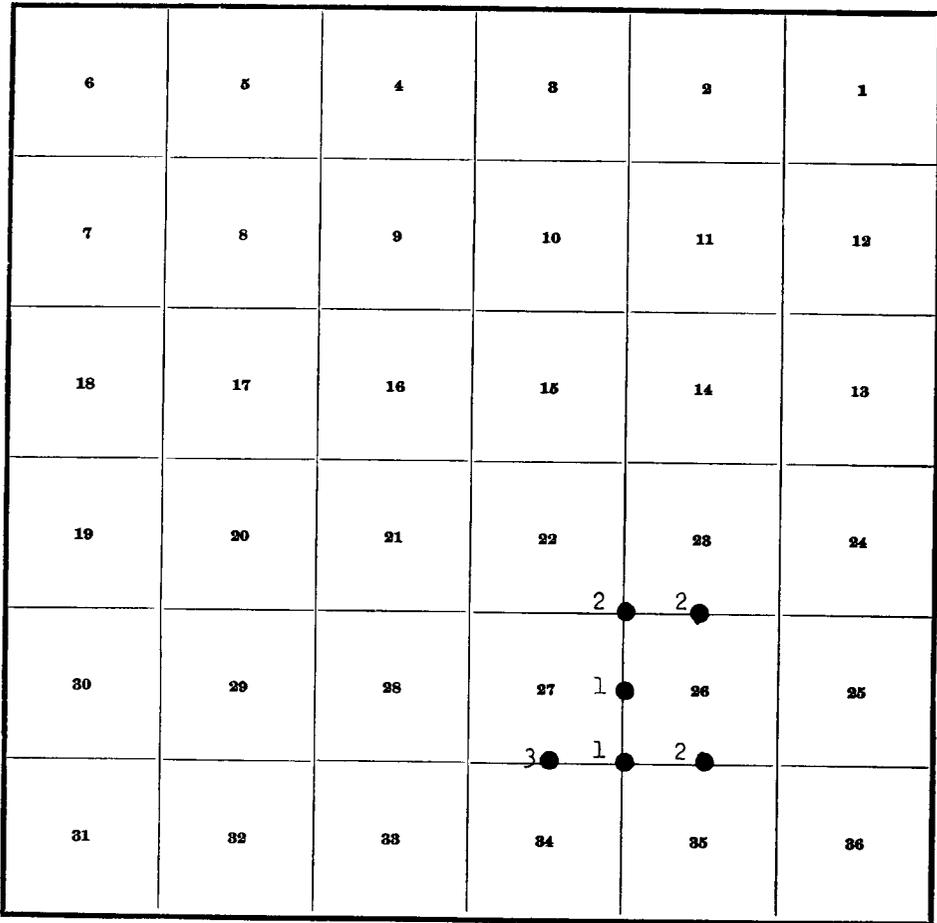

CORNER REMONUMENTATION INDEX DIAGRAM

Township 8 South, Range 4 East, S.L. Meridian

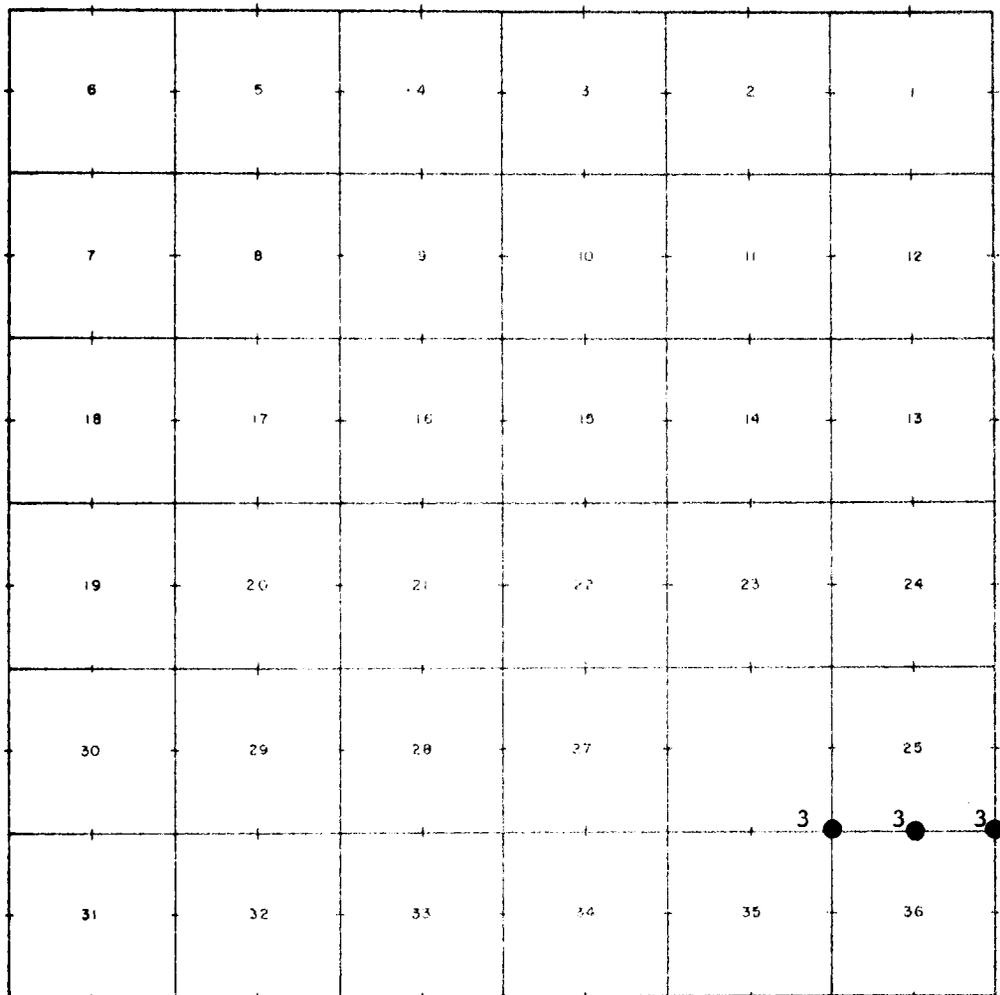

Remonumentation of Corners in T. 6 S., R. 4 E.

CHAINS

The following field notes are those of the remonumentation of certain identified original corners selected by the U. S. Forest Service as being adjacent to or controlling the boundaries of Forest Service Lands, located within the Uinta National Forest, in the following townships:

T. 6 S., R. 4 E. and T. 8 S., R. 4 E.,
in SL Mer., Utah

The position of each corner was marked by the original monument or determined from corner accessories recorded in the survey record. The remonumentation was requested by and accomplished in cooperation with the Forest Service.

T. 6 S., R. 4 E.

T. 6 S., R. 4 E., SL Mer., Utah is located within the Uinta National Forest; the subdivisions of the township were surveyed by Stewart & Stewart, Deputy Surveyors, in 1900.

At the cor. of secs. 26, 27, 34 and 35, which is mkd. by a sandstone, 16x13x10 ins., firmly set, mkd. with 1 notch on S. and 2 notches on E. edge, and witnessed by small, deeply embedded mound of stone W. of cor.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, over broken glass, orig. cor. buried on N. side of post, with brass cap mkd.

T6S R4E
S27|S26
S34|S35
1962

Place collar of rock around post.

Cor. is located on top of narrow bench, at E. edge, bench extends S.; steep descent E. into Berry Port Canyon, about 4½ chs. dist., a draw enters canyon, about 4½ chs. dist. N. of cor. in oak brush.

At the ¼ sec. cor. of secs. 26 and 27, which is mkd. by a quartzite stone, 20x11x3 ins., firmly set, mkd. ¼ on W. side and witnessed by few scattered rock W. of cor.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, over broken glass, orig. cor. buried on W. side of post, with brass cap mkd.

¼
T6S R4E
S27|S26
1962

from which I mark

A maple, 8 ins. diam., bears N. 14° W., 35 lks. dist., mkd. ¼ S27 BT.

Place collar of rock around post. A metal fence post with F.S. signs, bears W. of cor. 7 lks. dist.

Remonumentation of Corners in T. 6 S., R. 4 E.

CHAINS

Cor. is located on very steep W. slope, in oak and maple brush, 75 lks. E. of dry channel in Berry Port Canyon, drains S.

At the cor. of secs. 22, 23, 26 and 27, which is mkd. by a sandstone 19x12x4 ins., firmly set, mkd. with 2 notches on S. and E. edges, and witnessed by a small mound of stone W. of cor.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, over broken glass, original cor. buried on E. side of post, with brass cap mkd.

T6S R4E
S22 | S23
S27 | S26
1962

Raise a mound of stone around cor.

Cor. is located on steep E. slope, in dense oak and scattered maple brush, about 10 chs. dist. W. of Berry Port Canyon.

At the ¼ sec. cor. of secs. 23 and 26, which is mkd. by a blue limestone, 14x10x7 ins. firmly set, mkd. ¼ on N. face, and witnessed by a small mound of stone N. of cor.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, over broken glass, orig. cor. buried on W. side of post, with brass cap mkd.

T6S R4E
¼ S23
S26
1962

Raise a large mound of stone around cor and set steel fence post with Forest Service signs S. of cor. 3 lks. dist.

Cor. is located on SW. slope of top of spur, sloping S. 50° W., in dense short oak brush.

At the ¼ sec. cor. of secs. 26 and 35, which is mkd. by a sandstone, 15x14x7 ins., mkd. ¼, found lying on the ground at S. edge of embedded mound of stone.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, over broken glass, orig. cor. buried on S. side of post, with brass cap mkd.

T6S R4E
¼ S26
S35
1962

Raise a mound of stone, 3x2 ft. N. of cor. and collar of rock around post.

Remonumentation of Corners in T. 6 S., R. 4 E.

CHAINS

Cor. is located on a gradual SE. slope, in oak brush, about 1 ch. S. and 1½ chs. E. of center of ridge bearing about N. 30° E. and S. 30° W.

At the ¼ sec. cor. of secs. 27 and 34, which is mkd. by a quartzite stone, 16x10x7 ins., firmly set, mkd. ¼ on N. face. and witnessed by a mound of stone, 2x1½ ft. N. of cor.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, over broken glass, orig. cor. buried on S. side of post, with brass cap mkd.

T6S R4E
 S27
 ¼ S34
 1962.

Place collar of rock around post and metal fence post with F. S. signs NW. 4 lks. dist.

Cor. is located on med. steep S. slope in short oak brush, and about 3 chs. S. of top of spur sloping SE.

T. 8 S., R. 4 E.

T. 8 S., R. 4 E., SL Mer., Utah, is located within the Uinta National Forest; the N. and E. boundaries and the subdivisions of the township were surveyed by Stewart & Stewart, deputy surveyors, in 1899.

At the cor. of secs. 25, 30, 31 and 36, on E. bdy. of Tp., which is mkd. by conglomerate stone, 14x11x6 ins., mkd. with 1 notch on one side and 5 notches on opposite side, found lying on the ground at S. base of cedar fence post at cor. of net and wire fences bearing N. and E., witnessed by an embedded mound of stone on the W.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, over broken glass, orig. cor. buried on S. side of post, with brass cap mkd.

T8S
 R4E | R5E
 S25 | S30
 S36 | S31
 1962

Raise a mound of stone around cor.

Cor. is located on gentle SW. slope, in sage and scattered oak brush, at the cor. of fences N. and E. and about 8 chs. W. of old road bearing NW. and SE. Cleared pasture land to the NE.

At the cor. of secs. 25, 26, 35 and 36, which is mkd. by a sandstone, 14x11x9 ins., firmly set, mkd. with 1 notch on S. and E. edges and witnessed by few scattered rock.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, over broken glass, orig. cor. buried on S. side of post, with brass cap mkd.

Remonumentation of Corners in T. 8 S., R. 4 E.

CHAINS

T8S R4E
 S26 | S25
 S35 | S36
 1962

from which I mark

A juniper, 9 ins. diam., bears N. 72° W., 327 lks. dist., mkd. T8S R4E S26 BT.

A juniper, 5 ins. diam., bears S. 30° W., 257 lks. dist., mkd. S35 BT.

Cor. is located on gentle S. slope in open sagebrush and few scattered juniper; 10 lks. E. of small swale, drains S.

At the $\frac{1}{2}$ sec. cor. of secs. 25 and 36, which is mkd. by a limestone, 20x12x7 ins., firmly set, mkd. $\frac{1}{2}$ on N. face and witnessed by a small embedded mound of stone N. of cor.

At cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, over broken glass, orig. cor. buried on S. side of post, with brass cap mkd.

T8S R4E
 $\frac{1}{2}$ S25
 S36
 1962

Raise a mound of stone around cor.

Cor. is located on a gradual SE. slope in sage, scattered oak and service brush, about 8 chs. dist. W. of Wanrohdes Canyon and creek; road along E. side of creek.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
ORIGINAL

FIELD NOTES

DEC 8 11 10 11

DEPT. OF THE INTERIOR
BUREAU OF LAND MGMT

403

OF THE

RETRACEMENT WITH REMONUMENTATION

OF

MILE CORNERS FOUND ON THE UTAH, WYOMING STATE LINE

BETWEEN MILE CORNERS 267 AND 286, ALONG THE NORTH BOUNDARY

OF

TOWNSHIP 3 NORTH, RANGES 22, 23 AND 24 EAST

Of the Salt Lake Meridian,

In the State of Utah

EXECUTED BY

Fred R. Chappell, Cadastral Surveyor

Under special instructions dated May 25, 19 62, which provided for the surveys
included under Group Number 456, approved June 8, 1962,
and assignment instructions dated June 8, 19 62.

Survey commenced June 18, 19 62


Survey completed August 15, 19 62

INDEX DIAGRAM

Township _____, Range _____

| | | | | | |
|----|----|----|----|----|----|
| 6 | 5 | 4 | 3 | 2 | 1 |
| 7 | 8 | 9 | 10 | 11 | 12 |
| 13 | 14 | 15 | 16 | 17 | 18 |
| 19 | 20 | 21 | 22 | 23 | 24 |
| 25 | 26 | 27 | 28 | 29 | 30 |
| 31 | 32 | 33 | 34 | 35 | 36 |

UTAH-WYOMING STATE BOUNDARY LINE

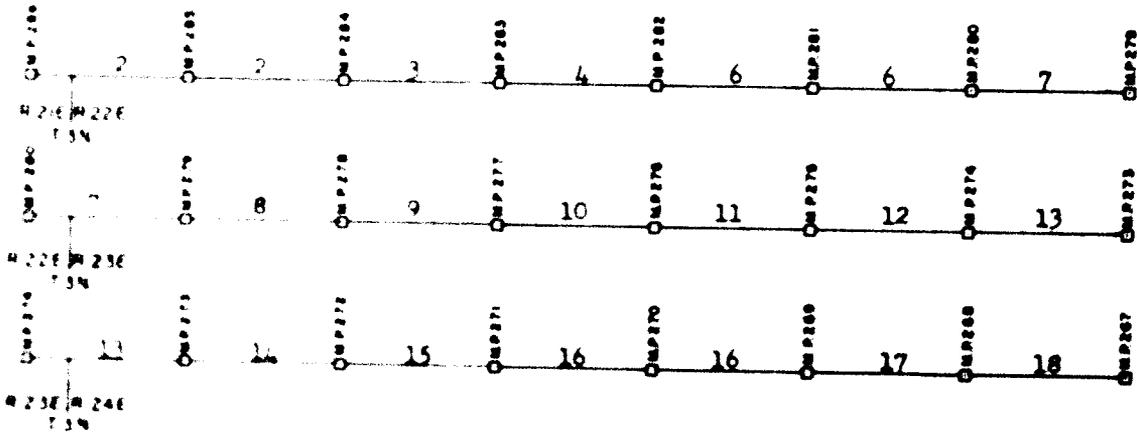

Retracement of the Utah and Wyoming State Line, along the North Boundary of T. 3 N., Rs. 22-23 and 24 E., between mile cors. 267 and 286.

CHAINS

The Utah and Wyoming State Line, between mile cors. 267 and 286 was surveyed by A. V. Richards in 1873. In 1898 Adolph Jessen retraced between mile cors. 267 and 274 in connection with the survey of T. 3 N., R. 24 E., Utah. In 1906 S. P. and J. R. Stewart retraced between mile cors. 273 and 286 in connection with the survey of T. 3 N., Rs. 22 and 23 E., Utah. In 1911 Herman Jaeckel and Emil Voigt retraced between mile cors. 267 and 286 in connection with Wyoming Surveys. The following field notes are those of the retracement, with the remonumentation of mile cors. found, between mile cors. 267 and 286 inclusive.

The survey was executed with a W. and L. E. Gurley transit No. 580538. It is equipped with a full vertical circle and improved Smith-type telescope solar attachment, and conforms to the standard instrumental specifications of the Bureau of Land Management. The instrument was maintained in precise adjustment throughout the progress of this survey.

The direction of the lines of the survey were determined by the solar transit method.

Measurements were made with a narrow steel tape, 8 chains in length, graduated every tenth link for the first link, every link for the next 99 links, and the remainder at intervals of 10 links. The tape was tested by comparison with a one chain standard steel tape and found to be correct. All measurements were made on the slope and the vertical angle of each interval ascertained by a clinometer in good adjustment. The horizontal equivalents alone are entered in the field note record. The length of all lines were determined by chaining where possible; otherwise by traverses and triangulations. The details of such traverses or triangulations have been thoroughly verified and in order to simplify the record the diagrams and reductions are omitted from these field notes.

The geographic position for mile post 286 is at latitude $40^{\circ} 59' 57.5''$ N., and longitude $109^{\circ} 29' 44.8''$ W., as adjusted from section line ties made to U. S. C. & G. S. triangulation station "Linwood," at latitude $41^{\circ} 00' 14.202''$ N., and longitude $109^{\circ} 27' 39.022''$ W., located N. $29^{\circ} 47' 30''$ E., 86.75 Chs. dist. from the cor. of secs. 17, 18, 19 and 20, T. 3 N., R. 22 E.

The magnetic declination was read at a number of stations and the average of the several readings was found to be N. $16^{\circ} 45'$ E.

Retracement and remonumentation of corners found of the Survey executed by A. V. Richards in 1873.

Beginning at mile cor. 286 on the Utah and Wyoming State Line, which is monumented with a cedar post, 7 ft. long, 6 ins. square, set 3 ft. in a mound of earth and stone, and mkd. UTAH on the south, WYOMING on the north and 286 MILE on the east face.

At the cor. point.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground to solid rock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

Retracement of the Utah and Wyoming State Line, along the North Boundary of T. 3 N., Rs. 22-23 and 24 E., between mile cors. 267 and 286.

CHAINS

286 M
WYOMING
UTAH

1962

Reset the original cor. alongside the iron post.

N. 89° 56' E., along the 286 mile.

Over mountainous land, asc. 60 ft. along a N. slope, through medium dense timber.

24.68 The closing cor. of T. 3 N., Rs. 21 and 22 E., monumente with an iron post, 2½ ins. diam., as described in the 1962 field notes of the resurvey of T. 3 N., R. 22 E.

Thence along the N. Bdy. of T. 3 N., R. 22 E.

Asc. 30 ft. along a N. slope.

51.68 Fall 16 lks. N. of a Wyoming closing cor. monumented wit an iron post, 2 ins. diam., firmly set in the ground, with brass cap mkd.

T12N R107W
S20|S21
C C

1911

Asc. 30 ft. along a N. slope.

63.06 Point for the N. ¼ sec. cor. of sec. 18, T. 3 N., R. 22 E., at proportionate distance between closing cors. Cor. point not monumented.

Asc. 30 ft. along a N. slope.

78.61 The 285 mile cor. monumented with a cedar post, 7 ft. long, 6 ins. square, set in a mound of earth and stone, and mkd. UTAH on the south, WYOMING on the north and 285 MILE on the east face.

At the cor. point.

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground to solid rock and in a mound of stone, 3 ft. base to top, with brass cap mkd.

285 M
WYOMING
UTAH

1962

Reset the original cor. alongside the iron post.

Land, mountainous.

Soil, rocky clay, with sandstone outcroppings.

Timber, medium dense juniper and pinon.

Undergrowth, scattered sagebrush, bitterbrush, and grass.

N. 89° 16' E., along the 285 mile.

Retracement of the Utah, Wyoming State Line, along the North Boundary of T. 3 N., Rs. 22-23 and 24 E., between mile corners 267 and 286.

CHAINS

Over mountainous land, through medium dense timber. Asc. 25 ft. along a N. slope.

24.42 The closing cor. of secs. 17-18, T. 3 N., R. 22 E., monumented with an iron post, 2½ ins. diam., as described in the 1962 field notes of the resurvey of T. 3 N., R. 22 E.

25.60 Top of reef, bears N. 88° 30' E., and S. 88° 30' W., desc. 75 ft. over vertical ledges. Then desc. 200 ft. along a talus slope.

53.24 Fall 17 lks. S. of a Wyoming closing cor. monumented with an iron post, 2 ins. diam., firmly set in the ground, with brass cap mkd.

T12N R107W
S21|S22
 C C

1911

Desc. 20 ft. along a S. slope.

64.43 Point for the N. ¼ sec. cor. of sec. 17, T. 3 N., R. 22 E., at midpoint between closing cors. Cor. point not monumented.

Continue along a S. slope, cut by numerous small draws and spurs.

79.50 The 284 mile cor. monumented with a cedar post, 4 ft. long, 4 ins. square, firmly set in the ground, and mkd. UTAH on the south, WYOMING on the north, and 284 MILE on the east face.

At the cor. point.

Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground, to solid rock and in a mound of stone 3 ft. base to top, with brass cap mkd.

284 M
WYOMING
 UTAH

1962

Reset the original cor. alongside the iron post.

Land, mountainous.
 Soil, rocky clay, with sandstone outcroppings.
 Timber, medium dense scrub juniper and pinon.
 Undergrowth, scattered sagebrush, bitterbrush, grass and weeds.

N. 89° 13' E., along the 284 mile.

Over mountainous land, through medium timber, desc. 20 ft. along a S. slope.

24.94 The closing cor. of secs. 16-17, T. 3 N., R. 22 E., monumented with an iron post, 2½ ins. diam., as described in the 1962 field notes of the resurvey of T. 3 N., R. 22 E.

Retracement of the Utah, Wyoming State Line, along the North Boundary of T. 3 N., Rs. 22-23 and 24 E., between mile cors. 267 and 286.

CHAINS

- Desc. 20 ft. along a S. slope.
- 40.00 Leave timber; desc. 130 ft. along a S. talus slope.
- 53.24 Fall 18 lks. S. of a Wyoming closing cor., monumented with an iron post, 2 ins. diam., firmly set in the ground, with brass cap mkd.

T12N R107W
S22 | S23
 C C

1911

- Desc. 50 ft. along a S. slope.
- 64.99 Point for the N. ¼ sec. cor. of sec. 16, T. 3 N., R. 22 E., at midpoint between closing cors. Cor. point not monumented.
- 65.30 Enter nearly level bottom land.
- 67.90 Cor. of barb wire fence; bears E. and N.
- 77.83 Fall 3 lks. S. of a Wyoming tract cor. monumented with an iron post, 1 in. diam., firmly set in the ground, with brass cap mkd.

T12N R107W
 S23 | TR37
 ——— | 5

1911

- 80.00 The 283 mile cor., monumented with a cedar post, 5 ft. long, 4 ins. square, firmly set in the ground, and mkd. UTAH on the south, WYOMING on the north and 283 MILE on the east face.
- At the cor. point.
- Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

283 M
WYOMING
 UTAH

1962

- Reset the original cor. alongside the iron post.
- Land, mountainous the first 65.00 chs., nearly level the balance.
- Soil, rocky clay.
- Timber, medium juniper and pinon the first ½ mile, no timber the balance.
- Undergrowth, medium sagebrush, shadscale, grass and weeds
- N. 89° 31' E., along the 283 mile.
- Over nearly level ground, through medium undergrowth.
- 16.60 Wash, 30 lks. wide, 15 ft. deep, drains S. 25° W.

Retracement of the Utah and Wyoming State Line, along the North Boundary of T. 3 N., Rs. 22-23 and 24 E., between mile cors. 267 and 286..

CHAINS

- 25.04 The closing cor. of secs. 15-16, T. 3 N., R. 22 E., monumented with an iron post, 2½ ins. diam., as described in the 1962 field notes of the resurvey of T. 3 N., R. 22 E.
- 25.40 Wash, 40 lks. wide 15 ft. deep, drains SW.
- 28.25 Bladed dirt road, Linwood to Clay Basin, bears N. and S.; asc. 140 ft. along a SW: slope.
- 37.87 Fall 5 lks. S. of a Wyoming Tract cor. monumented with an iron post, 1 in. diam., firmly set in the ground, with brass cap mkd.

T12N R107W

TR37 | S23

4

1911

- 53.42 Fall 4 lks. N. of a Wyoming closing cor. monumented with an iron post, 2 ins. diam., firmly set in the ground, with brass cap mkd.

T21N R107W

S23 | S24

C C

1911

Asc. 60 ft. over a SW. slope.

- 60.30 Spur, ridge, bears S. 80° E. and N. 80° W.; desc. 30 ft. over a NE. slope.

- 65.03 Point for the N. ¼ sec. cor. of sec. 15, T. 3 N., R. 22 E., at midpoint between closing cors. Cor. point not monumented.

Continue over a NE. slope.

- 68.30 Enter timber; desc. 15 ft. over a NE. slope.

- 80.47 The 282 mile cor., monumented with a cedar post, 6 ft. long, 4 ins. square, set in a mound of stone, and mkd. UTAH on the south, WYOMING on the north and 282 MILE on the east face.

At the cor. point.

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.

282 M

WYOMING

UTAH

1962

Reset the original cor. alongside the iron post.

Land, nearly level the first 28:00 chs., rolling the balance.

Soil, rocky clay, with sandstone outcrops.

Timber, medium dense juniper and pinon the last 12.00 chs.

Undergrowth, medium dense sagebrush, shadscale, grass and weeds.

Retracement of the Utah, Wyoming State Line, along the North Boundary of T. 3 N., Rs. 22-23 and 24 E., between mile cors. 267 and 286.

CHAINS

N. 89° 32' E., along the 282 mile.

Over rolling land, through scattered timber; desc. 30 ft. over a NE. slope.

12.50 Leave timber; enter bottom land.

17.60 Dim jeep road, bears S. 85° E. and N. 85 W.

24.55 The closing cor. of secs. 14-15, monumented with an iron post, 2½ ins. diam., as described in the 1962 field notes of the resurvey of T. 3 N., R. 22 E.

24.70 Enter timber; asc. 75 ft. over a SW. slope.

41.80 Wash, 15 lks. wide, 3 ft. deep, drains S.; asc. 80 ft. over a SW. slope.

53.16 Fall 12 lks. N. of a Wyoming closing cor. monumented with an iron post, 3 ins. diam., firmly set in a mound of stone, with brass cap mkd.

T12NR107W T12NR106W

S24 | S19

C C

1911

Asc. 100 ft. over a SW. slope.

64.50 Point for the N. ¼ sec. cor. of sec. 14, T. 3 N., R. 22 E., at midpoint between closing cors. Cor. point not monumented.

Asc. 220 ft. over a badly broken SW. slope.

78.73 The 281 mile cor. monumented with a cedar post, 6 ft. long, 5 ins. square, set in a mound of stone, and mkd. UTAH on the south, WYOMING on the north and 281 MILE on the east face.

At the cor. point.

Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground to solid rock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

281 M

WYOMING

UTAH

1962

Land, mountainous.

Soil, rocky clay.

Timber, medium juniper and pinon.

Undergrowth, scattered patches of dense sagebrush, grass and weeds.

N. 89° 26' E., along the 281 mile.

Over mountainous land; asc. 250 ft. over a broken SW. slope, through medium dense timber.

13.40 Ridge, bears S. 65° E., and N. 75° W.; desc. 160 ft. over a steep NE. slope.

Retracement of the Utah and Wyoming State Line, along the North Boundary of T. 3 N., Rs. 22-23 and 24 E., between mile cors. 267 and 286.

CHAINS

25.72 The closing cor. of secs. 13-14, T. 3 N., R. 22 E., monumented with an iron post, 2½ ins. diam., as described in the 1962 field notes of the resurvey of T. 3 N., R. 22 E.

Desc. 390 ft. over a NE. slope.

54.73 Fall 6 lks. N. of a Wyoming closing cor., monumented with an iron post, 2 ins. diam., set in a mound of stone, with brass cap mkd.

T12N R106W

S19|S20

C C

1911

Leave timber; desc. 40 ft. over a NE. slope.

62.70 Bottom of steep descent; thence over rolling land sloping to the N.

65.97 Point for the N. ¼ sec. cor. of sec. 13, T. 3 N., R. 22 E. at midpoint, between closing cors. Cor. point not monumented.

78.47 The 280 mile cor.; monumented with a cedar stake, 5 ft. long, 3 ins. square, mkd. UTAH on one face, WYOMING on the opposite face, and 280 MILE on an adjacent face. This stake was broken off at ground level; stub of post found in ground.

At the cor. point.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

280 M

WYOMING

UTAH

1962

Reset the original cor. alongside the iron post.

The above cor. is set 1 lk. N. of barb wire fence cor. fence bears E. and SW.

Land, steep mountainous the first 62.70 chs., rolling the balance.

Soil, rocky clay.

Timber, medium dense scrub juniper and pinon the first 55.00 chs., no timber the balance.

Undergrowth, scattered wild apple, bitterbrush, sagebrush and grass.

N. 89° 23' E., along the 280 mile.

Over rolling land, along fence line, through medium dense undergrowth.

11.00 West rim of draw, bears N. and S.; desc. 100 ft. over an E. slope.

18.90 Bottom of draw, drains N. 05° W.; asc. 70 ft. over a W. slope.

Retracement of the Utah and Wyoming State Line, along the North Boundary of T. 3 N., Rs. 22-23 and 24 E., between mile cors. 267 and 286.

CHAINS

- 25.90 Spur, projects NW.; desc. 15 ft. over a NE. slope; enter timber.
- 27.75 The closing cor. of T. 3 N., Rs. 22 and 23 E., monumented with an iron post, 2½ ins. diam., as described in the 1962 field notes of the resurvey of T. 3 N., R. 22 E.
- Thence along the N. Bdy. of T. 3 N., R. 23 E.
- Desc. 100 ft. over a NE. slope.
- 37.05 Bladed dirt road, Linwood to Clay Basin, bears SE. and NW.; leave timber; desc. 20 ft. over a gentle NE. slope.
- 48.80 Wash, 30 lks. wide, 15 ft. deep, drains NW.; asc. 40 ft. over a W. slope.
- 56.04 Fall 5 lks. S. of a Wyoming closing cor. monumented with an iron post, 2½ ins. diam., firmly set in the ground, with brass cap mkd.

T12N R106W

S20|S21

C C

1911

Asc. 85 ft. over a W. changing to S. slope.

- 72.34 Point for the N. ¼ sec. cor. of sec. 18, T. 3 N., R. 23 E., at proportionate distance, between closing cors. Cor. point not monumented.

Desc. 40 ft. along a S. slope.

- 79.60 The 279 mile cor., monumented with a cedar post, 7 ft. long, 6 ins. square, set in a mound of stone, and mkd. UTAH on the south, WYOMING on the north and 279 MILE on the east face.

At the cor. point.

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to solid rock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

279 M

WYOMING

UTAH

1962

Reset the original cor. alongside the iron post.

Land, rolling low hills.

Soil, rocky clay.

Timber, scattered patches of juniper and pinon.

Undergrowth, medium dense sagebrush, shadscale, grass and weeds.

N. 89° 34' E., along the 279 mile,

Over rolling land; asc. 45 ft. over a SW. slope, through scattered undergrowth, along fence line.

Retracement of the Utah and Wyoming State Line, along the North Boundary of T. 3 N., Rs. 22-23 and 24 E., between mile cors. 267 and 286.

CHAINS

- 6.17 Cor. of fence on spur, projecting S.; fence bears S. 89° 30' W., and N. 10° E.; desc. 25 ft. over a NE. slope.
- 18.80 Wash, 20 lks. wide, 4 ft. deep, drains S. 80° W.
- 22.00 Fire trail, bears N. and S.
- 32.74 The closing cor. of secs. 17-18, T. 3 N., R. 23 E., monumented with an iron post, 2½ ins. diam., as described in the 1962 field notes of the resurvey of T. 3 N., R. 23 E.
- 34.95 Jeep road, bears NW. and SE.
- 38.90 Wash, 10 lks. wide, 7 ft. deep, drains NW.
- 44.70 Recross wash, drains SW.
- 56.52 Fall 11 lks. S. of a Wyoming closing cor., monumented with an iron post, 2 ins. diam., set in a mound of stone, with brass cap mkd.

T12N R106W

S21|S22

C C

1911

Asc. 40 ft. over a gentle W. slope.

- 72.75 Point for the N. ¼ sec. cor. of sec. 17, T. 3 N., R. 23 E., at midpoint between closing cors. Cor. point not monumented.
- 80.74 The 278 mile cor. monumented with a cedar post, 6 ft. long, 5 ins. square, set in a mound of stone and earth, and mkd. UTAH on the south, WYOMING on the north and 278 MILE on the east face.
- At the cor. point.
- Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

278 M

WYOMING

UTAH

1962

Reset the original cor. alongside the iron post.

Land, rolling low mountains.

Soil, rocky clay.

Timber, scattered patches of juniper the last ½ mile.

Undergrowth, medium dense sagebrush, shadscale, grass and weeds.

N. 89° 23' E., along the 278 mile.

Over rolling land, through scattered patches of timber.

- .75 Wash, 30 lks. wide, 4 ft. deep, drains NW.

- 5.30 Wash, 50 lks. wide, 30 ft. deep, drains SW.; asc. 100 ft. over a SW. slope.

Retracement of the Utah and Wyoming State Line, along the North Boundary of T. 3 N., Rs. 22-23 and 24 E., between mile cors. 267 and 286.

CHAINS

- 13.70 Jeep road, bears NE. and SW.; asc. 125 ft. over a SW. slope.
- 32.02 The closing cor. of secs. 16-17, T. 3 N., R. 23 E., monumented with an iron post, 2½ ins. diam., as described in the 1962 field notes of the resurvey of T. 3 N., R. 23 E.
Asc. 85 ft. along a SW. slope.
- 53.20 Enter dense timber; asc. 15 ft. over a SW. slope.
- 55.78 Fall 8 lks. S. of a Wyoming closing cor., monumented with an iron post, 2 ins. diam., firmly set in the ground, with brass cap mkd.

T12N R106W

S22|S23
C C

1911

Asc. 20 ft. over a SW. slope.

- 64.70 Top of ascent; desc. 80 ft. over an E. slope.
- 72.28 Point for the N. ¼ sec. cor. of sec. 16, T. 3 N., R. 23 E., at midpoint between closing cors. Cor. point not monumented.
- 78.06 The 277 mile cor., monumented with a cedar post, 6 ft. long, 5 ins. square, set in a mound of earth and stone, and mkd. UTAH on the south, WYOMING on the north and 277 MILE on the east face.

At the cor. point.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

277 M
WYOMING
UTAH

1962

Reset the original cor. alongside the iron post.

Land, rolling mountains.

Soil, rocky clay.

Timber, scattered patches of juniper and pinon.

Undergrowth, medium dense sagebrush, shadscale, grass and weeds.

N. 89° 32' E., along the 277 mile.

Over rolling land, through medium dense timber; desc. 10 ft. over an E. slope.

- .30 Wash, 30 lks. wide, 3 ft. deep, drains SW.; asc. 50 ft. over a W. slope.
- 1.20 Low spur, projects S.; desc. 50 ft. over an E. slope.
- 14.60 Wash, 30 lks. wide, 2 ft. deep, drains SW.; asc. 60 ft. over a SW. slope.

Retracement of the Utah and Wyoming State Line, along the North Boundary of T. 3 N., Rs. 22-23 and 24 E., between mile cors. 267 and 286.

CHAINS

- 18.40 Low spur, projects S.; desc. 60 ft. over a SE. slope.
- 33.50 Wash, 10 lks. wide, 4 ft. deep, drains S.
- 34.48 The closing cor. of secs. 15-16, T. 3 N., R. 23 E., monumented with an iron post, 2½ ins. diam., as described in the 1962 field notes of the resurvey of T. 3 N., R. 23 E.
- Asc. 210 ft. over a W. slope.
- 49.50 Top of bench; thence along a gentle S. slope.
- 50.10 Jeep road, bears N. and S.
- 57.89 Fall 13 lks. S. of a Wyoming closing cor., monumented with an iron post, 2 ins. diam., set in a mound of stone, with brass cap mkd.

T12N R106W
S23 | S24
 C C

1911

The above cor. is set at cor. of fences bearing N. and E.

- 58.60 Wash, 30 lks. wide, 4 ft. deep, drains S.
- 74.26 Point for the N. ¼ sec. cor. of sec. 15, T. 3 N., R. 23 E., at midpoint between closing cors. Cor. point not monumented.
- 79.48 The 276 mile cor., monumented with a cedar post, 7 ft. long, 6 ins. square, set in a mound of stone and earth, and mkd. UTAH on the south, WYOMING on the north and 276 MILE on the east face.
- At the cor. point.
- Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

276 M
WYOMING
 UTAH

1962

Reset the original cor. alongside the iron post.

Land, rolling and bench land.
 Soil, rocky clay.
 Timber, scattered patches of juniper, the first 25.00 chs., no timber the balance.
 Undergrowth, medium dense sagebrush, shadscale, grass and weeds.

N. 89° 16' E., along the 276 mile.

Over gently rolling land, sloping to the S., through medium dense undergrowth, along fence line.

- 11.50 Wash, 30 lks. wide, 4 ft. deep, drains S.

Retracement of the Utah and Wyoming State Line, along the North Boundary of T. 3 N., Rs. 22-23 and 24 E., between mile cors. 267 and 286.

CHAINS

- 34.56 The closing cor. of secs. 14-15, T. 3 N., R. 23 E., monumented with an iron post, 2½ ins. diam., as described in the 1962 field notes of the resurvey of T. 3 N., R. 23 E.
- 44.80 Wash, 30 lks. wide, 2 ft. deep, drains S.; asc. 115 ft. over a grassy W. slope.
- 51.60 Spur, projects S.; desc. 20 ft. over an E. slope.
- 58.27 Fall 21 lks. S. of a Wyoming closing cor., monumented with an iron post, 3 ins. diam., firmly set in the ground, with brass cap mkd.

T12N
R106W R105W
S24|S19
C C

1911

Desc. 280 ft. over an E. slope; continue along fence.

- 74.71 Point for the N. ¼ sec. cor. of sec. 14, T. 3 N., R. 23 E., at midpoint between closing cors. Cor. point not monumented.

- 79.87 The 275 mile cor., monumented with a cedar post, 6 ft. long, 4 ins. square, set 2 ft. in the ground, and mkd. UTAH on the south, WYOMING on the north and 275 MILE on the east face.

At the cor. point.

Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd.

275 M
WYOMING
UTAH

1962

Reset the original cor. alongside the iron post.

Land, rolling, mountainous.

Soil, rocky clay.

Timber, none.

Undergrowth, medium dense sagebrush, grass and weeds.

N. 89° 33' E., along the 275 mile.

Over rolling mountain land, through medium dense undergrowth; desc. 150 ft. over an E. slope, along fence line.

- 26.00 Jeep road, at gate in fence, road bears irregularly NE. and SW.; desc. 30 ft. over a gentle E. slope.
- 34.99 The closing cor. of secs. 13-14, T. 3 N., R. 23 E., monumented with an iron post, 2½ ins. diam., as described in the 1962 field notes of the resurvey of T. 3 N., R. 23 E.
- Desc. 30 ft. over a NE. slope.
- 46.15 End of fence; desc. 50 ft. over a NE. slope; enter timber.

Retracement of the Utah and Wyoming State Line, along the North Boundary of T. 3 N., Rs. 22-23 and 24 E., between mile cors. 267 and 286..

CHAINS

- 53.40 Draw, drains S.; asc. 130 ft. over a W. slope.
- 57.37 Fall 19 lks. S. of a Wyoming closing cor., monumented with an iron post, 2 ins. diam., firmly set in the ground, and in a mound of stone, with brass cap mkd.
- T12N R105W
S19|S20
C C
- 1911
- Asc. 150 ft. over a W. changing to NW. slope; leave timber.
- 75.16 Point for the N. $\frac{1}{4}$ sec. cor. of sec. 13, at proportionate distance between the closing cor. of T. 3 N., Rs. 23 and 24 E., and the closing cor. of secs. 13-14, T. 3 N., R. 23 E. Cor. point not monumented.
- 79.69 The 274 mile cor., monumented with a cedar post, 6 ft. long, 5 ins. square, set in a mound of stone, and mkd. UTAH on the south, WYOMING on the north and 274 MILE on the east face.
- At the cor. point.
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 16 ins. in the ground to solid rock, and in a mound of stone, $3\frac{1}{2}$ ft. base to top, with brass cap mkd.
- 274 M
WYOMING
UTAH
- 1962
- Reset the original cor. alongside the iron post.
- Land, mountainous.
Soil, rocky, sandy clay.
Timber, scattered patches of medium dense juniper and pinon.
Undergrowth, sagebrush, bitterbrush, grass and weeds.
-
- N. 89° 09' E., along the 274 mile.
- Over mountainous land, through medium dense undergrowth; asc. 110 ft. along a N. slope.
- 37.34 The closing cor. of T. 3 N., Rs. 23-24 E., monumented with an iron post, $2\frac{1}{2}$ ins. diam., as described in the 1962 field notes of the resurvey of T. 3 N., R. 23 E.
- Thence along the N. Bdy. of T. 3 N., R. 24 E.
- Asc. 75 ft. along a N. slope, through scattered timber.
- 57.76 Fall 1.36 chs. N. of a Wyoming closing cor., monumented with an iron post, 2 ins. diam., firmly set in the ground, with brass cap mkd.

T12N R105W
S20|S21
C C

1911

Retracement of the Utah and Wyoming State Line, along the North Boundary of T. 3 N., Rs. 22-23 and 24 E., between mile cors. 267 and 286..

CHAINS

Asc. 50 ft. over a NE. slope.

- 74.70 Enter dense timber on Clay Basin rim; rim bears N. 87° E., and S. 87° W.; desc. 50 ft. along a S. slope.
- 76.18 Point for the N. $\frac{1}{2}$ sec. cor. of sec. 18, T. 3 N., R. 24 E., at proportionate distance between closing cors. Cor. point not monumented.
- Continue along a S. slope.
- 79.40 The 273 mile cor., monumented with a cedar post, 6 ft. long, 4 ins. square, set in a mound of earth and stone, mkd. UTAH on the south, WYOMING on the north, and 273 MILE on the east face.
- At the cor. point.
- Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 16 ins. in the ground to solid rock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.
- 273 M
WYOMING
UTAH
- 1962
- Reset the original cor. alongside the iron post.
- Land, mountainous.
Soil, rocky clay, with a considerable amount of exposed sandstone.
Timber, scattered juniper and pinon the first 75.00 chs., medium dense the balance.
Undergrowth, scattered sagebrush, bitterbrush and grass.
-
- N. 85° 29' E., along the 273 mile.
- Over mountainous land; asc. 100 ft. along a S. slope through medium dense timber.
- 17.50 Rim of Clay Basin, bears S. 83° E. and N. 83° W.; then along a N. slope, through scattered timber.
- 25.00 Rim of Clay Basin, bears N. and S.; desc. 300 ft. over an E. changing to SE. slope.
- 37.56 The closing cor. of secs. 17-18, T. 3 N., R. 24 E., monumented with an iron post 2 $\frac{1}{2}$ ins. diam., as described in the 1962 field notes of the resurvey of T. 3 N., R. 24 E.
- Desc. 620 ft. over a ledgy, badly broken SE. slope.
- 73.69 The 272 mile cor., monumented with a pine post, 6 ft. long, 5 ins. square, set in a mound of earth and stone, and mkd. UTAH on the south, WYOMING on the north, and 272 MILE on the east face.
- At the cor. point.
- Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

Retracement of the Utah and Wyoming State Line, along the North Boundary of T. 3 N., Rs. 22-23 and 24 E., between mile cors. 267 and 286.

CHAINS

272 M

WYOMING

UTAH

1962

Deposit the original cor. alongside the iron post.

Land, badly broken, mountainous.

Soil, rocky clay, with a considerable amount of broken and eroded sandstone.

Timber, medium dense to scattered pinon and juniper.

Undergrowth, scant sagebrush, wild apple, grass and weeds.

S. 89° 42' E., along the 272 mile.

Over rolling land, through scattered timber; desc. 30 ft. over an E. slope.

3.90 Point for the N. $\frac{1}{4}$ sec. cor. of sec. 17, T. 3 N., R. 24 E., at midpoint between closing cors. Cor. point not monumented.

5.00 Leave timber; desc. 90 ft. over a gentle E. slope, through medium undergrowth.

15.70 Center of Red Creek, wash 20 ft. deep, 9 chs. wide; stream of water, 1 in. deep, 2 lks. wide, flows irregularly S.; thence over nearly level land.

42.30 Center of bladed dirt road, bears S. 26° 40' E., and N. 26° 40' W.

42.73 Telephone line, 2 wire, bears S. 26° 40' E., and N. 26° 40' W.

43.83 The closing cor. of secs 16-17, T. 3 N., R. 24 E., monumented with an iron post, 2 $\frac{1}{2}$ ins. diam., as described in the 1962 field notes of the resurvey of T. 3 N., R. 24 E.

Asc. 465 ft. over a SW. talus slope.

80.44 The 271 mile cor., monumented with a broken and partially decayed cedar post, with enough remaining scribe marks to identify it as the original 271 mile cor.

At the cor. point.

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

271 M

WYOMING

UTAH

1962

Deposit the remains of the original cor. alongside the iron post.

Land, broken mountainous to nearly level valley land.

Soil, rocky and sandy clay.

Timber, scattered juniper and pinon the first 10 chs., no timber the balance.

Undergrowth, medium sagebrush, greasewood, grass and weeds.

Retracement of the Utah and Wyoming State Line, along the North Boundary of T. 3 N., Rs. 22-23 and 24 E., between mile cors. 267 and 286.

CHAINS

S. 86° 13' E., along the 271 mile.

Over broken mountainous land; asc. 70 ft. along a SW. slope.

4.13 Point for the N. $\frac{1}{4}$ sec. cor. of sec. 16, T. 3 N., R. 24 E., at midpoint between closing cors. Cor. point not monumented.

Asc. 280 ft. over a badly broken SW. slope.

13.00 Rim of Clay Basin, bears S. 85° E., and N. 85° W.; desc. 75 ft. along a N. slope, through medium dense timber.

44.95 The closing cor. of secs. 15-16, T. 3 N., R. 24 E., monumented with an iron post, 2 $\frac{1}{2}$ ins. diam., as described in the 1962 field notes of the resurvey of T. 3 N., R. 24 E.

Asc. 75 ft. along a N. slope through medium dense timber.

64.44 Fall 67 lks. N. of a Wyoming closing cor., monumented with an iron post, 2 ins. diam., firmly set in the ground, with brass cap mkd.

WYOMING
T12N R105W
S23 | S24
C C

1911

Asc. 160 ft. along a N. slope.

79.21 The 270 mile cor., monumented with a cedar post, 6 ft. long, 5 ins. square, set in a mound of stone, and mkd. UTAH on the south, WYOMING on the north and 270 MILE on the east face.

At the cor. point.

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 10 ins. in the ground to solid rock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

270 M
WYOMING
UTAH

1962

Deposit the original cor. alongside the iron post.

Land, broken mountainous.

Soil, rocky clay, with a considerable amount of exposed sandstone.

Timber, none the first 15 chs., scattered to dense juniper and pinon the balance.

Undergrowth, scattered sagebrush, wild apple, grass and weeds.

S. 89° 07' E., along the 270 mile.

Over mountainous land, through dense timber; asc. 50 ft. along a N. slope.

Retracement of the Utah and Wyoming State Line, along the North Boundary of T. 3 N., Rs. 22-23 and 24 E., between mile cors. 267 and 286.

CHAINS

- 5.88 Point for the N. $\frac{1}{4}$ sec. cor. of secs. 15, T. 3 N., R. 24 E., at midpoint between closing cors. Cor. point not monumented.
Desc. 25 ft. along a N. slope.
- 14.50 Draw, drains NW.; asc. 20 ft. over a NW. slope.
- 17.30 Low spur, projects N.; thence along a N. slope.
- 24.50 Slope changes to NW.; asc. 185 ft.
- 32.00 Spur, projects N.; desc. 60 ft. over a NE. slope.
- 45.94 The closing cor. of secs. 14-15, T. 3 N., R. 24 E., monumented with an iron post, 2 $\frac{1}{2}$ ins. diam., as described in the 1962 field notes of the resurvey of T. 3 N., R. 24 E.
Desc. 100 ft. over a NE. slope.
- 64.86 Fall 14 lks. N. of a Wyoming closing cor., monumented with a stone, 6 x 8 x 8 ins. above ground, and mkd. with CC on the N., and 6 notches on the E. face, witnessed by a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, N. of the cor.
Desc. 90 ft. over an E. slope.
- 66.30 Draw, drains N.; asc. 100 ft. over a W. slope.
- 69.00 Spur, projects N.; desc. 40 ft. over a NE. slope.
- 79.68 Point for mile cor. 269 at proportionate distance, based on the record of the 1898 retracement in connection with Utah surveys. There is no remaining evidence of the original corner.
At the cor. point, set an unmarked cedar post, 7 ft. long, 6 ins. diam., 1 ft. in the ground to solid rock, and in a mound of stone, 4 ft. base, 2 ft. high.
Land, mountainous.
Soil, rocky and sandy clay.
Timber, medium dense juniper and pinon, scattered mahogany.
Undergrowth, medium sagebrush, grass and weeds.
-
- N. 89° 43' E., along the 269 mile.
- Over mountainous land, through medium dense timber, and medium undergrowth; desc. 50 ft. over a NE. slope.
- 6.34 Point for the N. $\frac{1}{4}$ sec. cor. of sec. 14, T. 3 N., R. 24 E., at midpoint between closing cors. Cor. point not monumented.
Desc. 50 ft. over a NE. slope.
- 7.55 Draw, drains N.; asc. 180 ft. over a W. slope.
- 17.35 Unimproved dirt road, on spur ridge, bears N. and S.; desc. 150 ft. over an E. slope.
- 30.25 Recross dirt road, bears N. and S.; thence over gently rolling land.

Retracement of the Utah and Wyoming State Line, along the North Boundary of T. 3 N., Rs. 22-23 and 24 E., between mile cors. 267 and 286.

CHAINS

- 33.25 Wash, 20 lks. wide, 6 ft. deep, drains SW.
- 39.55 Wash, 20 lks. wide, 4 ft. deep, drains SW.
- 40.15 Wash, 40 lks. wide, 3 ft. deep, drains SW.
- 45.00 Wash, 20 lks. wide, 2 ft. deep, drains SW.
- 46.42 The closing cor. of secs. 13-14, T. 3 N., R. 24 E., monumented with an iron post, 2½ ins. diam., as described in the 1962 field notes of the resurvey of T. 3 N., R. 24 E.
- Asc. 15 ft. along a gentle S. slope.
- 53.65 Jeep road, bears irregularly SW. and NE.; enter scattered timber; asc. 20 ft. along a S. slope.
- 56.65 Wash, 30 lks. wide, 20 ft. deep, drains SW.; asc. 60 ft. over a gentle SW. slope.
- 65.61 Fall 23 lks. N. of a Wyoming closing cor., monumented with a stone, 8 x 6 x 6 ins. above ground, and mkd. with 1 notch on the W., 5 notches on the E., and CC on the N. face, witnessed by a mound of stone, 2½ ft. base, 2 ft. high, N. of the cor.
- Asc. 95 ft. over a gentle SW. slope.
- 78.58 The 268 mile cor., monumented with a cedar post, 6 ft. long, 4 ins. square, set in a mound of earth and stone, and mkd. UTAH on the south, WYOMING on the north, and 268 MILE on the east face.
- At the cor. point.
- Set an iron post, 30 ins. long, 2½ ins. diam., 16 ins. in the ground to solid rock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.
- 268 M
WYOMING
UTAH
- 1962
- Deposit the original cor. alongside the iron post.
- Land, mountainous.
Soil, rocky clay.
Timber, medium dense to scattered juniper and pinon.
Undergrowth, scattered sagebrush, grass and weeds.
- S. 89° 39' E., along the 268 mile.
- Over mountainous land, through medium dense timber; asc. 40 ft. over a W. slope.
- 7.00 Draw, drains SW.; asc. 30 ft. over a SW. slope.
- 8.00 Point for the N. ¼ sec. cor. of sec. 13, T. 3 N., R. 24 E., at midpoint between closing cors. Cor. point not monumented.
- Asc. 390 ft. over a SW. slope.

Retracement of the Utah and Wyoming State Line, along the North Boundary of T. 3 N., Rs. 22-23 and 24 E., between mile cors. 267 and 286.

CHAINS

- 26.00 Spur, projects S.; desc. 150 ft. over a SE. slope.
- 39.90 Jeep road, in bottom of draw, bears irregularly NE. and SW.; draw drains SW.; asc. 90 ft. along a N. slope; leave timber.
- 48.17 The closing cor. of T. 3 N., Rs. 24 and 25 E., monumented with an iron post, 2½ ins. diam., as described in the field notes of the resurvey of T. 3 N., R. 24 E.
- 50.60 Shallow draw, drains N.; asc. 560 ft. along a N. slope.
- 82.05 The 267 mile cor., monumented with a cedar post, 7 ft. long, 5 ins. square, set in a mound of stone, and mkd. UTAH on the south, WYOMING on the north, and 267 MILE on the east face.

At the cor. point.

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to solid rock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

267 M
WYOMING
UTAH

1962

Reset the original cor. alongside the iron post.

Land, mountainous.

Soil, rocky, sandy clay.

Timber, medium dense juniper and pinon the first ½ mile, no timber the balance.

Undergrowth, medium sagebrush and grass the first ½ mile, medium dense grass the balance.

GENERAL DESCRIPTION

The land along this boundary line is mostly broken mountainous. The drainage is all in a general SW. direction, into the Green River which flows southerly, about 4 miles west of the 286 mile cor.

The elevation ranges from about 6200 ft. above sea level in the reaches in the canyon bottoms, to about 8400 ft. at the highest ridges.

The soil is principally a sandy clay with numerous sandstone outcrops, and is covered with a dense to scattered growth of pinon and cedar over most of the area; also patches of dense mahogany at the higher elevations. The undergrowth is mostly sagebrush, grass and weeds. The line is accessible by a bladed dirt road, Linwood to Clay Basin.

CHAINS

Blank

Page

CERTIFICATE OF SURVEY

I, Fred R. Chappell, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 25 day of May, 1962, I have retraced the Utah, Wyoming State Line, between mile corners 267 and 286, along the North Boundary of Township 3 North, Ranges 22, 23 and 24 East, Utah

of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

January 24, 1963 (Date)

Fred R. Chappell (Cadastral Surveyor)

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

SUBMITTED FOR APPROVAL Date APR 22 1964

BUREAU OF LAND MANAGEMENT, Washington, D. C.

The foregoing field notes of the retracement of the Utah, Wyoming State Line between mile corners 267 and 286, along the North Boundary of Township 3 North, Ranges 22, 23 and 24 East, Utah

executed by Fred R. Chappell, Cadastral Surveyor, having been critically examined and found correct, are hereby approved.

NOV 24 1964 (Date)

E. E. Remington (Chief, Division of Engineering) NES

CERTIFICATE OF TRANSCRIPT

I CERTIFY That the foregoing transcript of the field notes of the above-described surveys in is a true copy of the original field notes.

(Date)

(Chief, Division of Engineering)