

Volume

#

R0576

R576

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
ORIGINAL

FIELD NOTES

OF THE

DEPENDENT RESURVEY

OF THE

EAST, SOUTH AND WEST BOUNDARIES

AND A PORTION OF THE MEANDERS

OF THE GREEN RIVER

AND THE SUBDIVISION

OF

TOWNSHIP 2 NORTH, RANGE 24 EAST

AND THE

SURVEY OF THE ISLAND

IN SECTION 23 OF

TOWNSHIP 2 NORTH, RANGE 24 EAST

Of the SALT LAKE Meridian,

In the State of UTAH

EXECUTED BY

Fred R. Chappell

Cadastral Surveyor

Under special instructions dated May 25, 19 62, which provided for the surveys and Supplemental Special Instructions dated February 15, 1963, included under Group Number 456, approved June 8, 1962, and May 1, 1963, and assignment instructions dated May 3, 19 63.

Survey commenced May 13, 19 63

Survey completed September 19, 19 63

DEPT. OF THE INTERIOR
BUR OF LAND MGMT

1966 FEB 18 AM 11 22 .0

RECEIVED
STATE & LAND OFFICE
SALT LAKE CITY, UTAH

INDEX DIAGRAM

Township 2 North, Range 24 East,

25 6 83	84 5 82	70 4 69	59 3 58	48 2 47	37 1 9 37
24 7 80	81 8 80	68 9 67	57 10 56	46 11 46	36 12 8 35
21 18 78	79 17 77	66 16 65	55 15 54	45 14 44	34 13 7 32
20 19 75	75 20 74	64 21 62	53 22 52	Island on Page 85 42 23 41	31 24 5 29
18 30 72	73 29 72	61 28 60	51 27 50	40 26 39	29 25 4 28
17 31 15	71 32 14	59 33 13	49 34 13	38 35 11	27 36 2 10

River Meanders Pages 85 - 93

Township 2 North, Range 24 East

CHAINS

The North boundary was surveyed by A. Jessen in 1898 and dependently resurveyed by F. Chappell in 1962, under Group 456, Utah; and the record appears in the field notes of T. 3 N., R. 24 E. The south 4 miles of the East boundary were surveyed by A. D. Ferron in 1878 and retraced by A. Jessen in 1898, and the north 2 miles of the East boundary were surveyed by A. Jessen in 1898; and the record appears in the field notes of T. 2 N., R. 24 E. The West boundary was surveyed by A. Jessen in 1898 and retraced by S. P. and J. R. Stewart in 1906, and the record appears in the field notes of T. 2 N., R. 24 E. The South boundary was surveyed by A. Jessen in 1898, and the record appears in the field notes of T. 1 N., R. 24 E. The subdivisional lines were surveyed by A. Jessen in 1898, and the record appears in the field notes of T. 2 N., R. 24 E.

The following notes are those of the dependent resurvey of the East, South and West boundaries, the subdivisional lines, and a partial meander of the Green River of Township 2 North, Range 24 East, and of the survey of the island in section 23 of Township 2 North, Range 24 East.

The survey was executed with W. & L. E. Gurley transits Nos. 591190 and 580538; they are equipped with full vertical circles and improved Smith-type telescopic solar attachments, which conform to the standard instrumental specifications of the Bureau of Land Management. The instruments were maintained in precise adjustment throughout the progress of the survey.

The direction of the lines were determined by the solar transit method.

Measurements were made with a narrow steel tape, 8 chains in length, graduated every link for the first 100 links and thereafter at intervals of 10 links. The tape was tested by comparison to a one chain standard steel tape and found to be correct. All measurements were made on the slope and the vertical angle of each interval ascertained by a clinometer in good adjustment. The horizontal equivalents alone are entered in the field note record. The lengths of all lines were determined by chaining where possible; otherwise, by triangulation or traverses. The details of such triangulations and traverses have been thoroughly verified; and in order to simplify the record, the diagrams and reductions are omitted from these field notes. Distances to topography on lines run by triangulation or traverse are approximate, as scaled from U.S.G.S. topographic sheets.

The geographic position for the southeast corner of the township is at latitude $40^{\circ}51'30.2''$ N. and longitude $109^{\circ}08'41.9''$ W. as computed from section line ties made to U.S.C. & G.S. triangulation station "Clay Basin", located N. $41^{\circ}17'$ E., 85.51 chs. dist. from the corner of secs. 16, 17, 20 and 21, T. 3 N., R. 24 E.

The magnetic declination was read at a number of stations throughout the township and the average of these readings was found to be $16^{\circ}15'$ E.

Dependent Resurvey of the East Boundary of T. 2 N., R. 24 E.

Reestablishment of the Survey Executed by A. D. Ferron in 1878 and Retraced by A. Jessen in 1898.

Dependent Resurvey of the East Boundary of T. 2 N., R. 24 E.

CHAINS

The record of the south 2 miles of the east boundary were not found in the field notes, making it necessary to rely on the 1898 survey plats of T. 2 N., Rs. 24 and 25 E., each showing the same record for this line.

Beginning at the cor. of Tps. 1 and 2 N., Rs. 24 and 25 E., which is monumented with a sandstone, 25x10x3 ins., firmly set and mkd. with 6 notches on the N., E., S., and W. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam.; 22 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T2N
R24E R25E
<u>S36</u> <u>S31</u>
S1 S6
T1N
1963

Deposit the original stone alongside the iron post.

•N. 0°24' W., bet. secs. 31 and 36.

Desc. 170 ft. over broken SE. slope through scattering juniper and sagebrush.

- 15.30 Wash, 7 ft. deep, 70 lks. wide, drains E.
- 19.30 Trail road, bears NE. and SW.
- 24.10 Trail road, bears E. and W.
- 28.40 Small spring, bears W., 75 lks. dist.
- 29.10 Barbed wire fence, 4 strand, bears NW. and SE., thence across cultivated field.
- 32.80 Irrigation ditch, 1 ft. deep, 10 lks. wide, course E., irregularly.
- 38.90 Net wire fence, bears E. and W.
- 39.00 Right bank of Green River, course E., banks 2 to 8 ft. high, water at present low stage.

Point for the meander cor. of secs. 31 and 36 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

M C
<u>S36</u> <u>S31</u>
T2N
R24E R25E
1963

raise a mound of stone, 3 ft. base, 2½ ft. high, W. of cor.

- 40.48 Point for the ¼ sec. cor. of secs. 31 and 36 at proportionate dist. falls in the Green River.

Dependent Resurvey of the East Boundary of T. 2 N., R. 24 E.

CHAINS

- 44.75 Net wire fence, bears W. and E., 12 lks. then N.
- 44.76 Left bank of the Green River.
- Point for the meander cor. of secs. 31 and 36 at proportionate dist.; there is no remaining evidence of the original cor.
- Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, with brass cap mkd.
- T2N
R24E R25E
S36 | S35
M C
1963
- Set a guard stake alongside the iron post.
- Thence over nearly level bottom land through scattered greasewood and sagebrush.
- 57.96 Corner of net wire fence, bears NE. and S.
- 75.36 Fence, 4 strand, barbed wire, bears E. and W.
- 75.40 Left bank of the Green River, course W., banks 2 to 8 ft. high, water at present low stage.
- Point selected for the witness meander cor. of secs. 31 and 36; there is no remaining evidence of the original cor.
- Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
- WMC
S36 | S31
T2N
R24E R25E
1963
- raise a mound of stone, 3 ft. base, 2 ft. high, S. of cor.
- 76.27 Point for the meander cor. of secs. 31 and 36, at proportionate dist. falls in the Green River.
- 80.96 Right bank of Green River.
- The cor. of secs. 25, 30, 31 and 36, which is identical to the meander cor. on the right bank of the Green River and is monumented with a sandstone, 16x8x6 ins., firmly set and mkd. with 5 notches on the N. edge and 1 notch on the S. edge.
- At the cor. point
- Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
- T2N
R24E R25E
S25 | S30
S36 | S31
M C
1963
- Deposit the original stone alongside the iron post.

Dependent Resurvey of the East Boundary of T. 2 N., R. 24 E.

CHAINS

Set an iron fence post, alongside the cor., and raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Land, broken S. 24.00 chs.; nearly level bottom land N. 57.00 chs.

Soil, mostly sandy loam.

Timber, scattering juniper on S. $\frac{1}{2}$ mile.

Undergrowth, scattering sagebrush, greasewood and shad-scale.

N. $0^{\circ}27'$ W., bet. secs. 25 and 30.

Over nearly level bottom land through scattering greasewood and sagebrush.

- .03 Fence, 4 strand, barbed wire, bears E. and W.
- 11.00 Trail road, bears NE. and SW.
- 21.50 Enter cultivated field.
- 35.79 Point for the meander cor. of secs. 25 and 30 at proportionate dist., falls in a cultivated field; there is no remaining evidence of the original cor.
- 37.90 Irrigation ditch, 3 ft. deep, 10 lks. wide, course E.; leave cultivated field.
- 38.33 Right bank of the Green River, course S. 60° E., banks 2 to 8 ft. high, water at present low stage.
- Point selected for the witness meander cor. of secs. 25 and 30.
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.
- WMC
 S25|S30
 T2N
 R24E R25E
 1963
- 40.33 True point for the $\frac{1}{2}$ sec. cor. of secs. 25 and 30, at proportionate dist. falls in the Green River.
- 46.48 Point for the meander cor. of secs. 25 and 30 on the left bank of the Green River at proportionate dist. falls on a steep cut bank and cannot be perpetuated.
- 47.18 Point selected for the witness meander cor. of secs. 25 and 30 falls in a 5 strand barbed wire fence bearing E. and W.
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.
- T2N
 R24E R25E
S25|S30
 WMC
 1963
- Thence across pasture land.
- 51.10 Fence, bears W. and E. approximately 70 lks., thence SE.

Dependent Resurvey of the East Boundary of T. 2 N., R. 24 E.

CHAINS

53.22 Power line, 4 wires, bears N. 63° E. and S. 63° W.; from this point, the NE. cor. of a log house bears N. 79° W., 3.30 chs. dist.

67.60 Road, unimproved, bears NE. and SW.

72.65 Fence, 4 strand, barbed wire, bears E. and W.

80.66 The cor. of secs. 19, 24, 25 and 30, monumented with a sandstone, 16x6x4 ins., firmly set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T2N
R24E R25E
S24 | S19
S25 | S30
1963

Deposit the original stone alongside the iron post and set a pine post alongside the iron post.

Land, nearly level bottom land.

Soil, sandy clay.

Timber, none.

Undergrowth, scattering greasewood and sagebrush.

N. 0°08' W., bet. secs. 19 and 24.

Asc. gradually over cultivated land.

24.20 Leave cultivated field; thence through scattering sagebrush and greasewood.

40.18 The ¼ sec. cor. of secs. 19 and 24, monumented with a sandstone, 17x8x6 ins., firmly set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T2N
R24E R25E
¼
S24 | S19
1963

Deposit the original stone alongside the iron post and raise a mound of stone, 3 ft. base, 2½ ft. high, W. of cor.

N. 0°21' E., beginning new measurement.

Over gently rolling bottom land through scattering greasewood, sagebrush and shadscale.

6.40 Wash, 6 ft. deep, 10 lks. wide, drains N. 15° W.

7.30 Irrigation ditch, 1 ft. deep, 10 lks. wide, course E.

9.80 Fence, 4 strand, barbed wire, bears E. and W.

Dependent Resurvey of the East Boundary of T. 2 N., R. 24 E.

CHAINS
9.82

Left bank of Green River; course S. 60° E., banks 2 to 6 ft. high, water at present low stage.

Point selected for the witness meander cor. of sec. 24, T. 2 N., R. 24 E. This point will also function as the meander cor. for sec. 19, T. 2 N., R. 25 E.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a mound of stone, 2 ft. base to top, with brass cap mkd.

W M C
~~S24 | S19~~
 R24E R25E
 T2N
 1963

12.01 True point for the meander cor. of sec. 24 at proportionate dist. falls in the river. There is no remaining evidence of the original cor.

16.30 Present position of the right bank of the Green River, bears NE. and SW.

30.90 Present position of the right bank of the Green River, bears NW. and SE.

36.39 Left bank of the Green River, course S. 45° E.

The meander cor. of secs. 19 and 24, monumented with a sandstone, 15x8x4 ins., firmly set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T2N
 R24E R25E
~~S24 | S19~~
 M C
 1963

raise a mound of stone, 3 ft. base, 2½ ft. high, N. of cor.

N. 0°12' W., beginning new measurement.

2.00 Road, unimproved, bears E. and W.

3.70 Power line, 4 wires, bears N. 35° W. and S. 35° E.

4.01 The cor. of secs. 13, 18, 19 and 24, monumented with a sandstone, 16x9x6 ins., firmly set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T2N
 R24E R25E
~~S13 | S18~~
~~S24 | S19~~
 1963

Dependent Resurvey of the East Boundary of T. 2 N., R. 24 E.

CHAINS

Deposit the original stone alongside the iron post, and raise a mound of stone, 3 ft. base, 2½ ft. high, W. of cor.

Land, nearly level bottom land.

Soil, sandy clay.

Timber, cottonwood along river.

Undergrowth, scattering sagebrush, greasewood and shadscale.

N. 0°24' E., bet. secs. 13 and 18.

Asc. 120 ft. over SW. slope through scattering sagebrush and greasewood.

1.40 Road from Brown's Park to Clay Basin, graded, bears N. 35° W. and S. 35° E.

7.70 Spur, projects W.; thence over rolling bench land.

29.90 Wash, 4 ft. deep, 25 lks. wide, drains W.

35.50 Wash, 4 ft. deep, 30 lks. wide, drains W.

40.10 The ¼ sec. cor. of secs. 13 and 18, monumented with a sandstone, 8x8x6 ins., firmly set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T2N
R24E R25E
¼
S13 | S18
1963

Deposit the original stone alongside the iron post, and raise a mound of stone, 3 ft. base, 2½ ft. high, W. of cor.

N. 0°15' E., beginning new measurement.

Asc. 80 ft. over SW. slope.

8.20 Limestone outcropping, projects W.; desc. 30 ft. over NW. slope.

11.80 Wash, 10 ft. deep, 60 lks. wide, drains W.

20.40 Wash, 4 ft. deep, 40 lks. wide, drains SW.

26.90 Road from Brown's Park to Clay Basin, graded, bears N. 28° E. and S. 28° W.; asc. 120 ft. over steep S. slope.

34.70 Wash, 3 ft. deep, 30 lks. wide, drains SW.

40.10 The cor. of secs. 7, 12, 13 and 18, monumented with a limestone, 18x12x4 ins., firmly set, mkd. and witnessed as described in the official record.

At the cor. point

Dependent Resurvey of the East Boundary of T. 2 N., R. 24 E.

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.

T2N
R24E R25E
S12 | S7
S13 | S18
1963

Deposit the original stone alongside the iron post.

Land, rolling bench land.
Soil, sandy clay and rocky.
Timber, scattering juniper.
Undergrowth, scattering sagebrush, greasewood and shadscale.

N. 0°10' E., bet. secs. 7 and 12.

Asc. 120 ft. over rolling SW. slope through scattering sagebrush and juniper.

- 2.30 Wash, 4 ft. deep, 30 lks. wide, drains SW.
4.90 Wash, 2 ft. deep, 30 lks. wide, drains SW.
9.10 Wash, 2 ft. deep, 30 lks. wide, drains SW.
16.00 Wash, 3 ft. deep, 2.00 chs. wide, drains SW.
20.50 Base of mountain, bears E. and W.; asc. 260 ft. over steep S. slope.
31.80 Spur, projects SE.; desc. 30 ft. over NE. slope.
36.70 Draw, drains SE.; asc. 50 ft. over SE. slope.
40.61 Point for the ¼ sec. cor. of secs. 7 and 12 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T2N
R24E R25E
¼
S12 | S7
1963

Asc. 650 ft. over steep S. slope through medium dense juniper.

- 49.30 Top of ledge, 150 ft. high, bears E. and W.
56.90 Spur, projects SE.
62.10 Ridge, bears SE. and NW.; desc. 215 ft. over steep N. slope.
70.50 Ravine, drains E.; asc. 75 ft. over SE. slope.
75.90 Wash, 25 ft. deep, 1.00 ch. wide, drains E.
81.00 Spur, projects E.
81.22 Point for the cor. of secs. 1, 6, 7 and 12 at propor-

Dependent Resurvey of the East Boundary of T. 2 N., R. 24 E.

CRAB

tionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T2N
R24E R25E
S1 | S6
S12 | S7
1963

Land, mountainous.
Soil, rocky.
Timber, juniper.
Undergrowth, sagebrush and shadscale.

N. 0°10' E., bet. secs. 1 and 6.

Desc. 55 ft. over broken NE. slope through medium dense juniper.

- 6.90 Wash, 4 ft. deep, 20 lks. wide, drains NE. approximately 1.00 ch.
- 8.30 Wash, 5 ft. deep, 20 lks. wide, drains E.
- 19.20 Jesse Ewing Canyon, drains SE.; asc. 30 ft. over SW. slope.
- 21.10 Road from Brown's Park to Clay Basin, graded, bears NW. and SE. along bottom of Jesse Ewing Canyon.
- 33.10 Draw, drains SW.; asc. 200 ft. over broken SW. slope.
- 40.61 The ¼ sec. cor. of secs. 1 and 6, monumented with an iron post, 2½ ins. diam., firmly set, with brass cap mkd.

T2N
R24E R25E
¼
S1 | S6
1962

This cor. was remonumented in 1962 in connection with the dependent resurvey of T. 3 N., R. 24 E., this group.

N. 1°16' W., beginning new measurement.

Asc. 720 ft. over broken SW. slope through dense juniper

- 3.80 Wash, 4 ft. deep, 30 lks. wide, drains SW.
- 31.00 S. crest of ridge, bears E. and W.
- 35.00 Top of ridge, bears E. and W.; desc. 120 ft. over N. slope.
- 39.91 The cor. of Tps. 2 and 3 N., Rs. 24 and 25 E., monumented with an iron post, 2½ ins. diam., set, mkd. and witnessed as described in the official record.
- Land, mountainous.
Soil, sandy clay and rocky.
Timber, dense juniper.
Undergrowth, sagebrush and shadscale.

Dependent Resurvey of the South Boundary of T. 2 N., R. 24 E.

CHAINS

Reestablishment of the Survey Executed
by A. Jessen in 1898.

From the cor. of Tps. 1 and 2 N., Rs. 24 and 25 E.,
previously described.

N. 89°53' W., bet. secs. 1 and 36.

Asc. 55 ft. over E. slope through scattering juniper
and dense sagebrush.

- 9.20 Low spur, projects N.; desc. 50 ft. over NW. slope.
- 13.50 Wash, 3 ft. deep, 10 lks. wide, drains N.; asc. 40 ft.
over E. slope.
- 17.20 Low spur, projects NE.; thence desc. over gentle NW.
slope.
- 19.00 Road, unimproved, bears NE. and SW., irregularly.
- 20.00 Road, unimproved, bears NE. and SW.
- 26.32 Sears Creek, 4 ins. deep, 3 lks. wide, course NE., irre-
regularly; thence along creek bottom through dense maple
and willows.
- 32.40 Leave creek bottom; asc. 70 ft. over SE. slope.
- 32.92 Road, unimproved, bears NW. and SE., irregularly.
- 40.17 The $\frac{1}{4}$ sec. cor. of secs. 1 and 36, monumented with a
sandstone, 14x10x6 ins., firmly set, mkd. and witnessed
as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T2N R24E

$\frac{1}{4}$ $\frac{S36}{S1}$

T1N

1963

Deposit the original stone, alongside the iron post, and
raise a mound of stone, 3 ft. base, 2 ft. high, W. of
cor.

N. 89°54' W., beginning new measurement.

Asc. 55 ft. over broken SE. slope through scattering
juniper.

- 5.30 Road, unimproved, bears SW. and NE. approximately 4.00
chs., thence SE.
- 9.70 Old fence line, bears N. and S. 14 lks., thence W.;
continue along fence line.
- 18.60 Top of asc.; desc. gradually over gentle NW. slope.
- 20.60 Fence, barbed wire, bears N. and S. 19 lks., thence E.
- 20.90 Road, unimproved, bears NW. and E.

Dependent Resurvey of the South Boundary of T. 2 N., R. 24 E.

CHAINS
30.60

Wash, 3 ft. deep, 10 lks. wide, drains N.; asc. over gentle E. slope.

40.13

The cor. of secs. 1, 2, 35 and 36, monumented with a sandstone, 18x12x8 ins., firmly set, mkd. and witnessed as described in the official record.

From which the original bearing trees, in good condition:

A juniper, 12 ins. diam., bears N. 39°15' E.,
15 lks. dist., mkd. T2N R24E S36 BT.

A juniper, 10 ins. diam., bears S. 71°30' E.,
52 lks. dist., mkd. T1N R24E S1 BT.

A juniper, 16 ins. diam., bears S. 64°15' W.,
10 lks. dist., mkd. T1N R24E S2 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T2N	R24E
S35	S36
S2	S1
T1N	
1963	

Deposit the original stone alongside the iron post, and raise a mound of stone, 3 ft. base, 3 ft. high, W. of cor.

Land, rolling and broken.

Soil, sandy clay and gravelly.

Timber, juniper and pinon and maple and willow along Sears Creek.

Undergrowth, sagebrush and bunchgrass.

N. 89°59' W., bet. secs. 2 and 35.

Asc. over NW. slope through dense juniper and pinon.

1.40

Bottom of draw; wash, 3 ft. deep, 6 ft. wide, drains NE.; asc. 70 ft. over SE. slope.

10.80

Spur, projects NE.; desc. 35 ft. over W. slope.

14.70

Bottom of draw; wash, 1 ft. deep, 5 lks. wide, drains NE.; asc. 40 ft. over SE. slope.

18.70

Spur, projects NE.; desc. 45 ft. over NW. slope.

20.80

Bottom of draw; wash, 2 ft. deep, 6 lks. wide, drains NE.; asc. 55 ft. over broken SE. slope.

29.30

Wash, 3 ft. deep, 20 lks. wide, drains NE.

35.80

Wash, 3 ft. deep, 20 lks. wide, drains NE.; thence over ledgy SE. slope.

39.97

The ¼ sec. cor. of secs. 2 and 35, monumented with a sandstone, 16x16x14 ins., set in a mound of stone, and mkd. and witnessed as described in the official record.

From which the original bearing trees, in good condition:

A pinon, 18 ins. diam., bears S. 4° E., 25
lks. dist., mkd. ¼ S2 BT.

A pinon, 17 ins. diam., bears N. 34°30' W.,
50 lks. dist., mkd. ¼ S35 BT.

Dependent Resurvey of the South Boundary of T. 2 N., R. 24 E.

CHAINS

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., on solid rock and in a mound of stone, 5 ft. base to top, with brass cap mkd.

T2N R24E
¼ S35
S2
T1N
1963

Deposit the original stone alongside the iron post.

S. 89°43' W., beginning new measurement.

Asc. 30 ft. over ledgy SE. slope through dense juniper and pinon.

- 3.70 Old pole fence, bears NW. and SE.
- 4.40 Spur, projects NE.; leave ledges; asc. 40 ft. over N. slope.
- 8.20 Dozed road, bears NE. and SW.
- 9.70 Small wash, drains NE.
- 12.90 Small wash, drains NE.
- 17.20 Main wash, 4 ft. deep, 20 lks. wide, drains NE.; asc. 120 ft. over broken SE. slope.
- 33.10 Rocky spur, projects NE.; desc. 15 ft. over broken NW. slope.
- 38.70 Wash, 4 ft. deep, 20 lks. wide, drains NE.
- 39.50 Wash, 4 ft. deep, 20 lks. wide, drains NE.
- 39.84 The cor. of secs. 2, 3, 34 and 35, monumented with a sandstone, 20x12x5 ins., firmly set, mkd. and witnessed as described in the official record.

From which the original bearing trees:

- A pinon, 8 ins. diam., bears N. 33°30' E., 28 lks. dist., mkd. T2N R24E S35 BT.
- A juniper, 10 ins. diam., bears S. 87°45' E., 64 lks. dist., mkd. T1N R24E S2 BT.
- A pinon, 10 ins. diam., bears S. 9°15' W., 9 lks. dist., mkd. T1N R24E S3 BT.
- A pinon, 9 ins. diam., bears N. 44°30' W., 57 lks. dist., mkd. T2N R24E S34 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 5 ft. base to top, with brass cap mkd.

T2N R24E
S34 | S35
S3 | S2
T1N
1963

Deposit the original stone alongside the iron post.

Independent Resurvey of the South Boundary of T. 2 N., R. 24 E.

CHAINS

Land, mountainous.
Soil, sandy and rocky.
Timber, dense juniper and pinon.
Undergrowth, scattering sagebrush and bunchgrass.

West, bet, secs, 3 and 34.

By triangulation; asc. 240 ft. over NE. slope through dense juniper and pinon.

39.14 End of triangulation.

Point for the $\frac{1}{2}$ sec. cor. of secs. 3 and 34 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 16 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T2N R24E
 $\frac{1}{2}$ $\frac{S34}{S3}$
T1N
1963

Continue by triangulation; asc. 440 ft. over NE. slope, changing to E. slope.

76.10 End of triangulation; ledge, 50 ft. high, bears N. and S.; thence over ledgy E. slope.

78.28 The cor. of secs. 3, 4, 33 and 34, which is an "X" mkd. on solid sandstone.

From which the original bearing trees:

= A juniper, 8 ins. diam., bears N. 53° E., 5 lks. dist., mkd. T2N R24E S34 BT.
A pinon, 10 ins. diam., bears S. 48° E., 25 lks. dist., mkd. T1N R24E S3 BT.
A juniper, 14 ins. diam., bears S. $18^\circ 40'$ W., 30 lks. dist., mkd. T1N R24E S4 BT.
A juniper, 10 ins. diam., bears N. $14^\circ 45'$ W., 32 lks. dist., mkd. T2N R24E S33 BT.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., on solid sandstone and in a mound of stone, 5 ft. base to top, with brass cap mkd.

T2N R24E
 $\frac{S33}{S4} \frac{S34}{S3}$
T1N
1963

Deposit the original stone alongside the iron post.

Land, mountainous.
Soil, sandy and rocky.
Timber, dense juniper and pinon.
Undergrowth, scattering sagebrush.

S. $89^\circ 07'$ W., bet. secs. 4 and 33.

Dependent Resurvey of the South Boundary of T. 2 N., R. 24 E.

CHAINS

- Asc. 60 ft. over ledgy E. slope through dense juniper and pinon.
- 7.55 Ridge, bears NE. and SW.; thence by triangulation.
Desc. 450 ft. over ledgy NW. slope.
- 15.40 Bottom of Tolliver's Canyon; stream, 5 ins. deep, 4 lks. wide, course NE.; asc. 800 ft. over ledgy E. slope.
- 39.53 Point for the $\frac{1}{2}$ sec. cor. of secs. 4 and 33 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.
- T2N R24E
 $\frac{1}{2}$ $\frac{S33}{S4}$
T1N
1963
- Asc. 235 ft. over ledgy E. slope through medium dense pinon and juniper.
- 44.00 Top of ledge, 50 ft. high, bears N. and S.; thence over ledgy S. slope through dense pinon and juniper.

Asc. 90 ft.
- 61.40 Top of asc.; desc. 240 ft. over SW. slope.
- 76.00 Head of draw, drains SE.; asc. 40 ft. over E. slope.
- 79.06 The cor. of secs. 4, 5, 32 and 33, monumented with a quartzite stone, 16x10x5 ins., firmly set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.
- T2N R24E
 $\frac{S32}{S5}$ | $\frac{S33}{S4}$
T1N
1963
- Deposit the original stone alongside the iron post.

Land, mountainous.
Soil, sandy and rocky.
Timber, dense pinon and juniper; willow and maple along bottom of Tolliver's Canyon.
Undergrowth, sagebrush.
-
- N. 89°59' W., bet. secs. 5 and 32.
- By triangulation; asc. 40 ft. over E. slope through scattering juniper and pinon.
- 3.00 Spur, projects S.; desc. 40 ft. over W. slope.
- 8.00 Draw, drains SE.; asc. 280 ft. over NE. slope.

Dependent Resurvey of the South Boundary of T. 2 N., R. 24 E.

CHAINS

32.10 Ridge, bears N. and S.; desc. 110 ft. over SW. slope.

38.60 Net wire fence, bears NE and SW.

39.30 The $\frac{1}{4}$ sec. cor. of secs. 5 and 32, monumented with a sandstone, 20x8x6 ins., firmly set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T2N R24E

$\frac{1}{4}$ S32

S5

T1N

1963

Deposit the original stone alongside the iron post, and raise a mound of stone, 3 ft. base, N. of cor.

S. 89°51' W., beginning new measurement.

Desc. 50 ft. over broken S. slope through scattering juniper.

12.00 Small rocky spur, projects SW.

17.40 Small draw, drains SW.

23.00 Rocky spur, projects SW.; desc. 200 ft. over W. slope.

36.00 Bottom of Jackson Draw, drains SW.; thence over nearly level land.

40.23 The cor. of secs. 5, 6, 31 and 32, monumented with a sandstone, 20x8x8 ins., firmly set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T2N R24E

S31 | S32

S6 | S5

T1N

1963

Deposit the original stone alongside the iron post, and raise a mound of stone, 3 ft. base, $2\frac{1}{2}$ ft. high, W. of cor.

Land, mountainous on E. $\frac{1}{2}$ mile; rolling and broken on W. $\frac{1}{2}$ mile.

Soil, sandy clay and rocky.

Timber, scattering juniper and pinon.

Undergrowth, scattering sagebrush and shadscale.

S. 89°49' W., bet. secs. 6 and 31.

Asc. 90 ft. over SE. slope through heavy sagebrush.

14.60 Enter dense juniper and pinon and scattering mahogany and aspen.

33.20 Spur, projects S.; desc. 95 ft. over S. slope.

Dependent Resurvey of the South Boundary of T. 2 N., R. 24 E.

CHAINS
40.21

The $\frac{1}{2}$ sec. cor. of secs. 6 and 31, monumented with a sandstone, 24x10x6 ins., firmly set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 5 ins. in the ground to bedrock, and in a mound of stone, 5 ft. base to top, with brass cap mkd.

T2N R24E

$\frac{1}{2}$ $\frac{S31}{S6}$

T1N

1963

Deposit the original stone alongside the iron post.

West, beginning new measurement.

Desc. 40 ft. over rocky S. slope through medium dense mahogany, pinon and juniper.

2.00 Small wash, drains SW.

14.50 Rocky spur, projects S.; desc. 175 ft. over W. slope.

16.60 Leave timber.

27.80 Trail road in bottom of Jackson Draw, bears N. 10° W. and S. 10° E.; begin asc. over E. slope; asc. 70 ft.

34.30 Trail road, bears NW. and SE.

34.70 Barbed wire fence, bears N. 70° W. and S. 70° E.

35.90 Barbed wire fence, bears S. 20° W. and N. 20° E. approximately 75 lks.

36.30 Road, unimproved, bears S. 20° W. and N. 20° E.

40.40 The cor. of Tps. 1 and 2 N., Rs. 23 and 24 E., monumented with a sandstone, 20x12x10 ins., firmly set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 5 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T2N

R23E R24E

$\frac{S36}{S1}$ | $\frac{S31}{S6}$

T1N

1963

Deposit the original stone alongside the iron post.

Land, rolling and broken.

Soil, sandy and rocky.

Timber, juniper, pinon, aspen and mahogany.

Undergrowth, sagebrush and shadscale.

CHAINS

Reestablishment of the Survey Executed
by A. Jessen in 1898 and the
Retracement by S. P. and J. R. Stewart in 1906.

From the cor. of Tps. 1 and 2 N., Rs, 23 and 24 E.,
previously described.

N. 0°16' W., along the W. bdy. of sec. 31.

Asc. 140 ft. over rocky and ledgy E. slope through
scattering juniper.

- 3.29 Barbed wire fence, bears N. 70° W. and S. 70° E.
- 28.70 Rocky spur, projects E.; desc. 130 ft. over NE. slope.
- 29.50 Ledge, 15 ft. high, bears NW. and SE.; enter dense aspen
grove.
- 36.10 Leave aspen.
- 39.84 Point for the E. $\frac{1}{2}$ sec. cor. of sec. 36, T. 2 N., R. 23
E., at mid-point bet. the Tp. cor. and the closing cor.
of secs. 25 and 36.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins.
in the ground to bedrock, and in a mound of stone, 4
ft. base to top, with brass cap mkd.

T2N
R23E
 $\frac{1}{2}$
S36
1963

- 40.26 The W. $\frac{1}{2}$ sec. cor. of sec. 31, monumented with a
quartzite stone, 20x10x8 ins., firmly set, mkd. and
witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 22 ins.
in the ground, with brass cap mkd.

T2N
R23E R24E
 $\frac{1}{2}$
S31
1963

Deposit the original stone alongside the iron post, and
raise a mound of stone, 3 ft. base, $2\frac{1}{2}$ ft. high, E. of cor.

N. 0°14' E., beginning new measurement.

Desc. 35 ft. over rocky NE. slope through heavy sage-
brush.

- 5.80 Road in bottom of Jackson Draw, unimproved, bears NW.
and SE.; asc. 25 ft. over SW. slope.
- 6.20 Enter scattering juniper and pinon.
- 11.10 Spur, projects W.; desc. 50 ft. over broken W. slope.
- 22.70 Begin asc. over rocky and ledgy SW. slope.
- 25.50 Top of ledge, 30 ft. high, bears NW. and SE.

Dependent Resurvey of the West Boundary of T. 2 N., R. 24 E.

CHAINS

37.50

Ridge, bears E. and W.; desc. 20 ft. over steep N. slope.

39.42

The closing cor. of secs. 25 and 36, T. 2 N., R. 23 E., monumented with a quartzite stone, 18x12x3 ins., firmly set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 5 ins. in the ground to bedrock, and in a mound of stone, 5 ft. base to top, with brass cap mkd.

T2N	
R23E R24E	
CC	S25 S31
	S36
1963	

Deposit the original stone alongside the iron post.

Desc. 25 ft. over N. slope.

40.55

The cor. of secs. 30 and 31, monumented with a quartzite stone, 20x10x4 ins., firmly set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., on solid rock and in a mound of stone, 5 ft. base to top, with brass cap mkd.

T2N	
R23E R24E	
S25	S30
	S31
1963	

Deposit the original stone alongside the iron post.

Land, mountainous.

Soil, rocky.

Timber, scattering pinon, juniper and aspen.

Undergrowth, sagebrush and service berry.

N. 0°36' W., along the W. bdy. of sec. 30.

By triangulation; desc. about 800 ft. over broken NW. slope through dense juniper and pinon and scattering pines.

37.50

Ravine, drains W.; asc. 20 ft. over S. slope.

39.16

Point for the E. ¼ sec. cor. of sec. 25, T. 2 N., R. 23 E., at mid-point bet. closing cors.

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T2N	
R23E	
	¼
	S25
1963	

Asc. 10 ft. over S. slope.

Dependent Resurvey of the West Boundary of T. 2 N., R. 24 E.

CHAINS
39.97

The W. $\frac{1}{2}$ sec. cor. of sec. 30, which is an "X" cut on a sandstone ledge as described in the official record; There is no remaining evidence of the bearing trees.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., over the "X" cut on solid sandstone, and in a mound of stone, 6 ft. base to top, with brass cap mkd.

T2N
R23E R24E
| $\frac{1}{2}$
| S30
1963

N. $0^{\circ}14'$ W., beginning new measurement.

Continue by triangulation.

- 1.15 Rocky spur, projects W.; desc. 120 ft. over NW. slope.
- 18.30 Rocky spur, projects W.; end of triangulation.
- Desc. 275 ft. over broken N. slope through medium dense pine.
- 37.00 Head of draw, drains NE.
- 39.48 The closing cor. of secs. 24 and 25, T. 2 N., R. 23 E., monumented with a sandstone, $20 \times 10 \times 5$ ins., firmly set, mkd. and witnessed as described in the official record.

From which the original bearing trees:

A pinon, 10 ins. diam., bears S. 45° W., 83 lks. dist., mkd. T2N R23E S25 BT.
A pine, 34 ins. diam., bears N. $55^{\circ}30'$ W., 206 lks. dist., mkd. T2N R23E S24 BT.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T2N
R23E R24E
CC $\frac{S24}{S25}$ | S30
1963

Deposit the original stone alongside the iron post, and raise a mound of stone, 3 ft. base, $2\frac{1}{2}$ ft. high, W. of cor.

- 40.44 The cor. of secs. 19 and 30, monumented with a sandstone $20 \times 12 \times 6$ ins., firmly set, mkd. and witnessed as described in the official record.

From which the original bearing trees:

A juniper, 14 ins. diam., bears N. 40° E., 97 lks. dist., mkd. T2N R24E S19 BT.
A dead juniper, 24 ins. diam., bears S. $21^{\circ}05'$ E., 44 lks. dist., mkd. T2N R24E S30 BT.

At the cor. point

Dependent Resurvey of the West Boundary of T. 2 N., R. 24 E.

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T2N
R23E R24E
S24 | S19
 | S30
1963

Deposit the original stone alongside the iron post, and raise a mound of stone, 3 ft. base, $2\frac{1}{2}$ ft. high, E. of cor.

Land, mountainous.

Soil, sandy and rocky.

Timber, pine, pinon, juniper and aspen.

Undergrowth, sagebrush and service berry.

N. $0^{\circ}10'$ W., along the W. bdy. of sec. 19.

Desc. 225 ft. over broken NE. slope through dense pinon and juniper.

1.50 Draw, drains E.

39.21 Point for the E. $\frac{1}{4}$ sec. cor. of sec. 24, T. 2 N., R. 23 E., at mid-point bet. closing cors.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 4 ins. in the ground, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T2N
R23E R24E
 $\frac{1}{4}$ |
S24 |
1963

40.28 The W. $\frac{1}{4}$ sec. cor. of sec. 19, monumented with a sandstone, 26x10x4 ins., firmly set, mkd. and witnessed as described in the official record.

From which the original bearing tree:

A pinon, 15 ins. diam., bears S. $38^{\circ}20'$ E.,
35 lks. dist., mkd. $\frac{1}{2}$ S19 BT.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T2N
R23E R24E
 $\frac{1}{4}$ |
S19 |
1963

Deposit the original stone alongside the iron post, and raise a mound of stone, 3 ft. base, E. of cor.

N. $0^{\circ}11'$ W., beginning new measurement.

Desc. gradually over NE. slope through dense pine and juniper.

9.70 S. rim of canyon; bears NW. and SE.; desc. 230 ft. over steep NE. slope.

Dependent Resurvey of the West Boundary of T. 2 N., R. 24 E.

CHAINS

17.80 Bottom of canyon, drains NE.; asc. 80 ft. over SE. slope.

31.10 N. rim of canyon, bears NE. and SW.; desc. 220 ft. over N. slope.

39.10 The closing cor. of secs. 13 and 24, T. 2 N., R. 23 E., monumented with a sandstone, 20x18x6 ins., firmly set, mkd. and witnessed as described in the official record.

From which the original bearing trees:

A juniper, 6 ins. diam., bears S. 63°45' W.,
39 lks. dist., mkd. T2N R23E S24 BT.
A pinon, 17 ins. diam., bears N. 55°15' W.,
215 lks. dist., mkd. T2N R23E S13 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T2N
R23E R24E
CC $\frac{S13}{S24}$ S19
1963

Deposit the original stone alongside the iron post.

39.70 The cor. of secs. 18 and 19, monumented with a sandstone, 15x8x6 ins., firmly set, mkd. and witnessed as described in the official record.

From which the original bearing trees:

A dead juniper, 10 ins. diam., bears N. 44°
45' E., 29 lks. dist., mkd. T2N R24E S18 BT.
A dead juniper, 10 ins. diam., bears S. 23° E.,
29 lks. dist., mkd. T2N R24E S19 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 5 ft. base to top, with brass cap mkd.

T2N
R23E R24E
S13 $\frac{S18}{S19}$
1963

Deposit the original stone alongside the iron post.

Land, mountainous.
Soil, sandy and rocky.
Timber, pine, juniper and pinon.
Undergrowth, sagebrush and manzanita.

N. 2°24' W., along the W. bdy. of sec. 18.

Desc. 600 ft. over steep N. slope through dense pinon and juniper.

21.11 Right bank of Green River, course E.

Dependent Resurvey of the West Boundary of T. 2 N., R. 24 E.

CHAINS

The meander cor. of secs. 13 and 18, monumented with a sandstone, 20x12x4 ins., firmly set and mkd. as described in the official record; there is no remaining evidence of the original bearing trees.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 7 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T2N
R23E R24E
M C
S13 | S18
1963

Deposit the original stone alongside the iron post.

N. 1°54' W., beginning new measurement.

Across Green River.

5.30 Left bank of the Green River.

The meander cor. of secs. 13 and 18, monumented with a sandstone, 18x8x7 ins., firmly set and mkd. as described in the official record; there is no remaining evidence of the original bearing trees.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T2N
R23E R24E
S13 | S18
M C
1963

Deposit the original stone alongside the iron post.

N. 2°35' W., beginning new measurement.

Asc. 480 ft. over ledgy S. slope. By triangulation.

12.91 True point for the E. ¼ sec. cor. of sec. 13, T. 2 N., R. 23 E., at mid-point bet. closing cors. falls on an inaccessible ledge and cannot be perpetuated.

14.29 Point selected for the witness ¼ sec. cor. of sec. 13. End of triangulation.

Set an iron post, 30 ins. long, 2½ ins. diam., over an "X" cut on solid sandstone, and in a mound of stone, 5 ft. base to top, with brass cap mkd.

T2N
R23E R24E
WC ¼ |
S13 |
1963

Asc. 165 ft. over ledgy S. slope.

Dependent Resurvey of the West Boundary of T. 2 N., R. 24 E.

CHAINS

17.97

The W. $\frac{1}{4}$ sec. cor. of sec. 18, monumented with a sandstone, 20x8x5 ins., firmly set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., on solid sandstone and in a mound of stone, 5 ft. base to top, with brass cap mkd.

T2N
R23E R24E
| $\frac{1}{2}$
S18
1963

Deposit the original stone alongside the iron post.

N. $1^{\circ}57'$ W., beginning new measurement.

Asc. 60 ft. over ledgy S. slope through dense pinon and juniper.

- 1.30 N. rim of canyon, bears E. and W.; asc. 35 ft. over SW. slope.
- 10.20 High spur, projects W.; desc. 375 ft. over broken NW. slope through dense juniper and pinon.
- 26.20 Power line, 4 wires, bears E. and W.
- 26.40 Bottom of canyon, drains SW., irregularly; asc. 20 ft. over SE. slope.
- 34.86 The closing cor. of secs. 12 and 13, T. 2 N., R. 23 E., monumented with a sandstone, 20x6x4 ins., firmly set, mkd. and witnessed as described in the official record.

From which the original bearing trees:

A juniper, 10 ins. diam., bears S. 52° W.,
70 lks. dist., mkd. T2N R23E S13 BT.
A juniper, 12 ins. diam., bears N. 56° W.,
26 lks. dist., mkd. T2N R23E S12 BT.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T2N
R23E R24E
CC $\frac{S12}{S13}$ | S18
1963

Deposit the original stone alongside the iron post.

Asc. 310 ft. over ledgy S. slope through dense juniper.

- 44.38 The cor. of secs. 7 and 12, which is an "X" mkd. on a large rock, 10x3x3 ft., and is witnessed as described in the official record.

From which the original bearing trees:

A juniper, 18 ins. diam., bears N. 45° E.,
42 lks. dist., mkd. T2N R24E S7 BT.

Dependent Resurvey of the West Boundary of T. 2 N., R. 24 E.

CHAINS

A juniper, 14 ins. diam., bears S. 14° E.,
20 lks. dist., mkd. T2N R24E S18~~WT~~.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., over
an "X" cut on solid rock, and in a mound of stone, 4
ft. base to top, with brass cap mkd.

T2N
R23E R24E
S12 | S7
 | S18
 1963

Land, mountainous.
Soil, mostly sandstone ledges.
Timber, pine, juniper and pinon.
Undergrowth, sagebrush and manzanita.

N. 0°15' W., along W. bdy. of sec. 7.

Asc. 460 ft. over series of sandstone ledges on S.
slope.

19.60 Top of ledges; thence along broken and rocky E. slope
of canyon through dense juniper.

30.71 Point for the E. ¼ sec. cor. of sec. 12, T. 2 N.,
R. 23 E., at mid-point bet. the closing cors.

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins.
in the ground to bedrock, and in a mound of stone, 4
ft. base to top, with brass cap mkd.

T2N
R23E R24E
¼ |
S12 |
 1963

Continue along broken E. slope.

39.52 Point for the W. ¼ sec. cor. of sec. 7 at proportionate
dist.; there is no remaining evidence of the original
cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 4 ins.
in the ground, and in a mound of stone, 4 ft. base to
top, with brass cap mkd.

T2N
R23E R24E
 | ¼
 | S7
 1963

Continue along broken E. slope.

45.50 Slope changes to S.; thence by triangulation.

Asc. 520 ft. over series of sandstone ledges.

60.80 Top of ledges, bears E. and W.; end of triangulation;
asc. 100 ft. over S. slope.

61.70 Spur, projects E.; desc. 40 ft. over NE. slope.

Dependent Resurvey of the West Boundary of T. 2 N., R. 24 E.

CHAINS

70.94

The closing cor. of secs. 1 and 12, T. 2 N., R. 23 E., monumented with a sandstone, 10x8x6 ins., firmly set, mkd. and witnessed as described in the official record.

From which the original bearing trees:

A juniper, 14 ins. diam., bears S. 58° W.,
20 lks. dist., mkd. T2N R23E S12 BT.

A pinon, 10 ins. diam., bears N. 37° W.,
39 lks. dist., mkd. T2N R23E S1 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 3 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T2N
R23E R24E
CC $\frac{S1}{S12}$ | S7
1963

Deposit the original stone alongside the iron post.

Desc. 60 ft. over NE. slope.

79.04

The cor. of secs. 6 and 7, monumented with a sandstone, 19x6x5 ins., firmly set and mkd. as described in the official record.

From which the original bearing trees:

A pinon, 10 ins. diam., bears N. 73°30' E.,
115 lks. dist., mkd. T2N R24E S6 BT.

A pinon, 12 ins. diam., bears S. 87°30' E.,
68 lks. dist., mkd. T2N R24E S7 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.

T2N
R23E R24E
S1 | $\frac{S6}{S7}$
1963

Deposit the original stone alongside the iron post, and raise a mound of stone, 3 ft. base, 2½ ft. high, E. of cor.

Land, mountainous.

Soil, rocky.

Timber, juniper and pinon.

Undergrowth, sagebrush and manzanita.

N. 0°07' W., along the W. bdy. of sec. 6.

By triangulation; desc. gradually over E. slope through dense juniper.

4.00

Slope changes to SE.; asc. 150 ft. over SE. slope.

31.78

Point for the E. ¼ sec. cor. of sec. 1, T. 2 N., R. 23 E., at proportionate dist.

Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins.

Dependent Resurvey of the West Boundary of T. 2 N., R. 24 E.

CHAINS

in the ground, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T2N
R23E R24E
|
1/2
S1
1963

Continue over rolling SE. slope, changing to SW. slope; asc. 30 ft.

40.36

The W. 1/2 sec. cor. of sec. 6, monumented with a sandstone, 27x12x10 ins., firmly set, mkd. and witnessed as described in the official record.

From which the original bearing tree:

A juniper, 10 ins. diam., bears N. 70° E.,
46 lks. dist., mkd. 1/2 S6 BT.

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 10 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T2N
R23E R24E
|
1/2
S6
1963

Deposit the original stone alongside the iron post.

N. 0°52' W., beginning new measurement.

Asc. 80 ft. over SW. slope across rolling mountain top, through scattering patches of juniper and pine.

20.03

Point for the N. 1/16 sec. cor. of sec. 6 at proportionate dist.

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.

T2N
R23E R24E
|
N.1/16
S6
1963

raise a mound of stone, 3 ft. base, 2 1/2 ft. high, E. of cor.

This cor. was set in accordance with the special instructions and is an angle point on the Ashley National Forest.

Continue over SW. slope; asc. 40 ft.

40.06

The cor. of Tps. 2 and 3 N., Rs. 23 and 24 E., monumented with an iron post, 2 1/2 ins. diam., set, mkd. and witnessed as described in the official record.

Land, mountainous.
Soil, sandy and rocky.
Timber, pine, juniper and pinon.
Undergrowth, sagebrush and grass.

Dependent Resurvey of the Subdivision of T. 2 N., R. 24 E.

CHAINS

Reestablishment of the Survey Executed
by A. Jessen in 1898.

From the cor. of secs. 1, 2, 35 and 36, on the S. bdy.
of the Tp., previously described.

N. 0°08' E., bet. secs. 35 and 36.

Desc. 10 ft. over N. slope through scattering juniper.

.60 Bottom of draw; wash, 3 ft. deep, 15 lks. wide, drains
SE.; asc. 70 ft. over S. slope.

6.10 Spur, projects E.; desc. 130 ft. over N. slope.

15.30 Bottom of draw; wash, 5 ft. deep, 30 lks. wide, drains
E.; asc. 40 ft. over S. slope.

19.30 Top of steep asc.; leave juniper; asc. 15 ft. over
gentle S. slope.

28.20 Low spur, projects E.; desc. gradually over gentle N.
slope through heavy sagebrush.

40.36 The $\frac{1}{2}$ sec. cor. of secs. 35 and 36, monumented with a
sandstone, 14x10x6 ins., firmly set, mkd. and witnessed
as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins.
in the ground, and in a collar of stone, with brass
cap mkd.

T2N R24E

$\frac{1}{2}$
S35|S36
1963

Deposit the original stone alongside the iron post.

N. 9°40' W., beginning new measurement.

Continue gradual desc. over gentle N. slope.

12.30 Small wash, drains NE.

41.33 The cor. of secs. 25, 26, 35 and 36, monumented with a
sandstone, 20x14x6 ins., firmly set, mkd. and witnessed
as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 15 ins.
in the ground to bedrock, and in a mound of stone, 3
ft. base to top, with brass cap mkd.

T2N R24E

S26|S25
S35|S36
1963

Deposit the original stone alongside the iron post.

Land, rolling S. $\frac{1}{2}$ mile; gently rolling N. $\frac{1}{2}$ mile.

Soil, sandy clay and rocky.

Timber, scattering juniper on S. $\frac{1}{2}$ mile.

Undergrowth, sagebrush and shadscale.

Dependent Resurvey of the Subdivision of T. 2 N., R. 24 E.

CHAINS

TAKO

From the cor. of secs. 25, 30, 31 and 36, on the E. bdy. of the Tp., previously described.

S. 89°30' W., bet. secs. 25 and 36.

Over nearly level bottom land across cultivated field.

6.90 Trail road, bears NE. and SW.

29.45 Barbed wire fence, bears N. and S.; leave field.

30.70 Irrigation ditch, 2 ft. deep, 5 lks. wide, course S.

31.00 Road, unimproved, bears N. and S.

32.40 Begin asc. over steep E. slope; asc. 195 ft. through scattering juniper.

37.60 E. rim of plateau, bears N. 10° E. and S. 10° W.; desc. gradually over SW. slope.

39.37 The ¼ sec. cor. of secs. 25 and 36, monumented with a sandstone, 15x15x4 ins., firmly set, mkd. and witnessed as described in the official record.

From which the original bearing trees:

A juniper, 10 ins. diam., bears N. 73°55' E., 111 lks. dist., mkd. ¼ S25 BT.

A juniper, 8 ins. diam., bears S. 21°15' W., 56 lks. dist., mkd. ¼ S36 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 16 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T2N R24E

¼ S25
S36

1963

Deposit the original stone alongside the iron post.

N. 89°19' W., beginning new measurement.

Desc. gradually over SW. slope through scattering juniper.

8.10 N. rim of hollow, bears N. 70° W. and S. 70° E.; leave juniper; desc. 100 ft. over S. slope.

27.50 Bottom of hollow; wash, 5 ft. deep, 30 lks. wide, drains S. 70° E.

32.70 Road, unimproved, follows along bottom of hollow; begin asc. over broken N. slope.

34.60 Wash, 3 ft. deep, 15 lks. wide, drains N.

47.00 S. rim of hollow, bears NW. and SE.

47.34 The cor. of secs. 25, 26, 35 and 36, previously described.

Land, nearly level bottom land E. ½ mile; broken bench W. ½ mile.

Soil, sandy clay in bottom land; sandy and rocky on remainder.

Timber, scattering juniper.

Dependent Resurvey of the Subdivision of T. 2 N., R. 24 E.

CHAINS

Undergrowth, scattering sagebrush and shadscale.

N. 0°03' W., bet. secs. 25 and 26.

Desc. 75 ft. over steep N. slope.

3.50 Road, unimproved, follows along bottom of hollow.

5.00 Bottom of hollow; wash, 4 ft. deep, 15 lks. wide, drains S. 70° E.; asc. 50 ft. over S. slope.

7.00 N. rim of hollow, bears N. 70° W. and S. 70° E.; thence over nearly level bench land.

40.04 The $\frac{1}{2}$ sec. cor. of secs. 25 and 26, monumented with a sandstone, 24x7x4 ins., firmly set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

T2N R24E
 $\frac{1}{2}$
S26 | S25
1963

Deposit the original stone alongside the iron post.

N. 10°48' E., beginning new measurement.

Over gently rolling desert land through scattering sagebrush.

34.20 Wash, 2 ft. deep, 8 lks. wide, drains E.

38.20 Road, unimproved, bears NE. and SW.

41.27 The cor. of secs. 23, 24, 25 and 26, monumented with a sandstone, 16x8x6 ins., firmly set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 14 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T2N R24E
S23 | S24
S26 | S25
1963

Deposit the original stone alongside the iron post.

Land, gently rolling bench land.
Soil, sandy clay and rocky.
Timber, none.
Undergrowth, sagebrush and shadscale.

From the cor. of secs. 19, 24, 25 and 30, on the E. bdy. of the Tp., previously described.

S. 89°36' W., bet. secs. 24 and 25.

Over level bottom land across cultivated field.

Dependent Resurvey of the Subdivision of T. 2 N., R. 24 E.

CHAINS	RANGE
21.35	Barbed wire fence, bears N. and S.; leave field; thence through scattering sagebrush.
33.01	Left bank of Green River, course S., banks 2 to 6 ft. high, water at present low stage.
	The meander cor. of secs. 24 and 25, monumented with a sandstone, 14x8x6 ins., firmly set, mkd. and witnessed as described in the official record.
	At the cor. point'
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">T2N R24E MC S24 S25 1963</p>
	Deposit the original stone alongside the iron post, and raise a mound of stone, 3 ft. base, E. of cor.
	S. 87°54' W., beginning new measurement.
1.25	Present water edge.
5.53	True point for the ¼ sec. cor. of secs. 24 and 25, at proportionate dist. falls in Green River.
5.80	Present water edge.
6.30	Irrigation ditch, 6 ft. deep, 20 lks. wide, course S.
6.45	Right bank of Green River.
	Point for the meander and witness ¼ sec. cor. of secs. 24 and 25, as determined from the remains of an original bearing tree; there is no remaining evidence of the other bearing tree.
	From which an original bearing tree:
	<p style="text-align: center;">A juniper stump, 18 ins. diam., 3½ ft. high, bears N. 44°23' W., 106 lks. dist., mkd. T2N R24E S24 MC ¼ WC BT.</p>
	Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.
	<p style="text-align: center;">T2N R24E WC ¼ S24 S25 M C 1963</p>
	N. 89°16' W., beginning new measurement.
	Asc. 205 ft. over E. slope through scattering juniper.
6.00	Top of asc., bears N. 10° W. and S. 10° E.; thence across nearly level bench land.
6.70	Road, unimproved, bears N. and S.
37.30	Road, unimproved, bears N. and S., irregularly.
38.70	The cor. of secs. 23, 24, 25 and 26, previously described.

Dependent Resurvey of the Subdivision of T. 2 N., R. 24 E.

CHAINS

Land, level bottom E. $\frac{1}{2}$ mile, level bench land W. $\frac{1}{2}$ mile.
Soil, sandy clay.
Timber, scattering juniper and cottonwood along Green River.
Undergrowth, scattering sagebrush and shadscale.

N. $0^{\circ}17'$ E., bet. secs. 23 and 24.

Desc. gradually over nearly level bench land through scattering sagebrush and shadscale.

10.20 Trail road, bears NW. and SE.

29.50 Road, unimproved, bears E. and W.

40.44 The $\frac{1}{2}$ sec. cor. of secs. 23 and 24, monumented with a sandstone, 14x12x3 ins., firmly set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T2N R24E

$\frac{1}{2}$
S23|S24
1963

Deposit the original stone alongside the iron post, and raise a mound of stone, 3 ft. base, $2\frac{1}{2}$ ft. high, W. of cor.

N. $0^{\circ}04'$ E., beginning new measurement.

Desc. gradually over nearly level bench land.

6.80 Leave bench; rim bears N. 80° E. and S. 80° W.; desc. 140 ft.; over N. slope.

14.12 Right bank of Green River, course E.; banks 2 to 6 ft. high; water at present low stage.

The meander cor. of secs. 23 and 24, monumented with a sandstone, 18x7x4 ins., firmly set, mkd. and witnessed as described in the official record.

From which the original bearing trees:

A cottonwood, 24 ins. diam., bears N. 7° E., 3.00 chs. dist., as described in the official record, but the markings have grown over.

A cottonwood, 30 ins. diam., bears N. $9^{\circ}16'$ W., 317 lks. dist. as described in the official record and the markings have grown over.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 12 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T2N R24E

M C
S23|S24
1963

Deposit the original stone alongside the iron post.

North, beginning new measurement.

4.10 Present water line on right side of Green River.

Dependent Resurvey of the Subdivision of T. 2 N., R. 24 E.

CHAINS

8.10

Present water line on left side of river.

9.13

Left bank of river.

Point for the meander cor. of secs. 23 and 24, at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T2N R24E
S23|S24
M C
1963

raise a mound of stone, 2½ ft. base, 2 ft. high, N. of cor.

Asc. 50 ft. over gently rolling S. slope through scattering sagebrush.

14.60

Road, graded, bears E. and W.

23.80

Power line, 4 wire, bears E. and W.

25.30

Wash, 3 ft. deep, 10 lks. wide, drains SE.

26.22

The cor. of secs. 13, 14, 23 and 24, monumented with a quartzite stone, 14x8x8 ins., firmly set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T2N R24E
S14|S13
S23|S24
1963

Deposit the original stone alongside the iron post.

Land, nearly level bench land S. ½ mile; bottom land N. ½ mile.

Soil, sandy clay and rocky.

Timber, cottonwood along river bottom.

Undergrowth, sagebrush and shadscale.

From the cor. of secs. 13, 18, 19 and 24, on the E. bdy. of the Tp., previously described.

N. 89°49' W., bet. secs. 13 and 24.

Desc. gradually over gently rolling SW. slope through scattering sagebrush.

.20

Power line, 4 wire, bears NW. and SE.

8.43

Old irrigation ditch, 3 ft. deep, 10 lks. wide, course SE

12.37

Left bank of Green River, course S. 70° E.

Point for the meander cor. of secs. 13 and 24 at proportionate dist.; there is no remaining evidence of the

Dependent Resurvey of the Subdivision of T. 2 N., R. 24 E.

original cor.

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

T2N R24E
813
MC S24
1963

29.99 Left bank of Green River, bears NE. and SW.

Point for the meander cor. of secs. 13 and 24 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

T2N R24E
813
S24/MC
1963

Thence over gentle SE. slope through scattering sagebrush and shadscale.

31.20 Old irrigation ditch, course NE.

35.50 Road, graded, bears NE. and SW.

38.38 The 1/2 sec. cor. of secs. 13 and 24, monumented with a quartzite stone, 18x10x4 ins., firmly set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.

T2N R24E
1/2 813
S24
1963

Deposit the original stone alongside the iron post, and raise a mound of stone, 2 ft. base, 1 ft. high, N. of cor.

The cor. is located in a barbed wire fence, bearing N. and S., and 1 lk. E. of a board corral fence bearing N. and S. approximately 1.00 ch. in each direction.

S. 89°59' W., beginning new measurement.

Asc. gradually over gentle S. slope through scattering sagebrush and shadscale.

1.22 W. side of corral.

25.32 Power line, bears S. 80° W. and N. 80° E.

33.80 Wash, 1 ft. deep, 5 lks. wide, drains S.

40.42 The cor. of secs. 13, 14, 23 and 24, previously described.

Land, gently rolling bottom land.
Soil, sandy and rocky.

Dependent Resurvey of the Subdivision of T. 2 N., R. 24 E.

CHAINS

Timber, cottonwood along river.
Undergrowth, sagebrush and shadscale.

N. 0°18' E., bet. secs. 13 and 14.

Over rolling desert land through scattering sagebrush and shadscale.

- 9.30 Wash, 2 ft. deep, 6 lks. wide, drains SE.
11.30 Wash, 3 ft. deep, 6 lks. wide, drains SE.; asc. 70 ft. over broken SE. slope.
24.50 Wash, 5 ft. deep, 20 lks. wide, drains SE.
25.40 Wash, 4 ft. deep, 30 lks. wide, drains SE.
30.00 Spur, projects SE.; desc. 10 ft. over NE. slope.
40.07 Base of spur, bears NW. and SE.

The $\frac{1}{2}$ sec. cor. of secs. 13 and 14, monumented with a hornblende stone, 18x10x6 ins., firmly set, mkd. and witnessed as described in the official record.

From which the original bearing tree:

A juniper, 8 ins. diam., bears N. 81° W.,
23 lks. dist., mkd. $\frac{1}{2}$ S13 BT.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 10 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T2N R24E
 $\frac{1}{2}$
S14 | S13
1963

Deposit the original stone alongside the iron post.

N. 0°16' E., beginning new measurement.

Asc. gradually along bottom of draw through heavy sagebrush.

- 8.80 Wash, 2 ft. deep, 15 lks. wide, drains SE.; asc. 85 ft. over SW. slope; enter scattered juniper.
19.10 Spur, projects SE.; desc. 80 ft. over NE. slope.
24.50 Wash, 4 ft. deep, 40 lks. wide, drains SE.; asc. 75 ft. over broken S. slope.
30.80 Wash, 2 ft. deep, 15 lks. wide, drains SE.; asc. 40 ft. over a S. slope.
36.50 Spur, projects SW.; desc. 20 ft. over a NW. slope.
39.97 Bottom of draw, drains SW.

The cor. of secs. 11, 12, 13 and 14, monumented with a limestone, 20x10x8 ins., firmly set, mkd. and witnessed as described in the official record.

From which the original bearing trees:

Dependent Resurvey of the Subdivision of T. 2 N., R. 24 E.

CHAINS

A juniper, 9 ins. diam., bears N. 86°30' E.,
50 lks. dist., mkd. T2N R24E S12 BT.
A juniper, 10 ins. diam., bears S. 40°45' E.,
48 lks. dist., mkd. T2N R24E S13 BT.
A juniper, 8 ins. diam., bears S. 22°45' W.,
18 lks. dist., mkd. T2N R24E S14 BT.
A juniper, 14 ins. diam., bears N. 41° W., 79
lks. dist., mkd. T2N R24E S11 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins.
in the ground to bedrock, and in a mound of stone, 6 ft.
base to top, with brass cap mkd.

T2N	R24E
<u>S11</u>	<u>S12</u>
S14	S13
1963	

Deposit the original stone alongside the iron post.

Land, rolling.

Soil, rocky.

Timber, scattering juniper.

Undergrowth, scattering sagebrush and greasewood.

From the cor. of secs. 7, 12, 13 and 18, on the E. bdy.
of the Tp., previously described.

S. 89°53' W., bet. secs. 12 and 13.

Desc. gradually over SW. slope through scattering juniper.

8.60 Wash, 2 ft. deep, 20 lks. wide, drains S.
11.80 Wash, 3 ft. deep, 20 lks. wide, drains S.
26.70 Wash, 10 ft. deep, 10 lks. wide, drains S.
36.40 Wash, 20 ft. deep, 30 lks. wide, drains S.
39.98 Net wire fence, bears N. and S.

The ¼ sec. cor. of secs. 12 and 13, monumented with a
sandstone, 14x6x4 ins., firmly set, mkd. and witnessed
as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T2N	R24E
¼	<u>S12</u>
	S13
1963	

Deposit the original stone alongside the iron post, and
raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.

N. 89°53' W., beginning new measurement.

Asc. gradually over broken S. slope through scattering
juniper.

7.20 Wash, 30 ft. deep, 50 lks. wide, drains S.

Dependent Resurvey of the Subdivision of T. 2 N., R. 24 E.

CHAINS

26.90	Wash, 2 ft. deep, 30 lks. wide, drains S.; asc. 50 ft. over SE. slope.
36.30	Spur, projects SW.; desc. 40 ft. over NW. slope.
38.50	The cor. of secs. 11, 12, 13 and 14, previously described. Land, gently rolling and rolling. Soil, sandy and rocky. Timber, scattering juniper. Undergrowth, scattering sagebrush and shadscale.
	N. 0°33' W., bet. secs. 11 and 12. By triangulation; asc. 360 ft. over broken S. slope through scattering juniper.
26.00	Spur, projects SE.; desc. 80 ft. over ledgy E. slope.
37.00	Bottom of canyon, drains SE.; thence along broken W. slope.
39.00	Bottom of same canyon, drains SW. approximately 2.00 chs. thence SE.; asc. 40 ft. over SE. slope.
40.53	Point for the $\frac{1}{4}$ sec. cor. of secs. 11 and 12, at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 8 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd. T2N R24E $\frac{1}{4}$ S11 S12 1963
	Continue by triangulation. Asc. 240 ft. over ledgy SE. slope.
48.50	Spur, projects E.; desc. 100 ft. over NE. slope.
51.50	Bottom of canyon, drains SE. approximately 6.00 chs., thence SW.; asc. 360 ft. over SW. slope.
67.50	Spur, projects W.; desc. 100 ft. over NW. slope.
72.50	Ravine, drains SW.; asc. 160 ft. over SE. slope.
81.06	Spur, projects SW.; end of triangulation. Point for the cor. of secs. 1, 2, 11 and 12 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 4 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd. T2N R24E $\frac{1}{4}$ S2 S1 S11 S12 1963
	Land, mountainous. Soil, rocky. Timber, juniper and pinon.

Dependent Resurvey of the Subdivision of T. 2 N., R. 24 E.

CRAINS

Undergrowth; sagebrush and manzanita.

From the cor. of secs. 1, 6, 7 and 12, on the E. bdy. of the Tp., previously described.

N. 89°58' W., bet. secs. 1 and 12.

Asc. 270 ft. over ledgy E. slope through scattering juniper and pinon.

4.60 Ledge, 10 ft. high, bears N. and S.

12.80 Ridge, bears N. and S.; asc. 50 ft. over broken S. slope.

27.50 Spur, projects SW.; desc. 70 ft. over W. slope.

39.77 Point for the $\frac{1}{4}$ sec. cor. of secs. 1 and 12 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 4 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T2N R24E

$\frac{1}{4}$ $\frac{S1}{S12}$
1963

Thence by triangulation.

Desc. 200 ft. over W. slope.

48.00 Ravine, drains S.; asc. 320 ft. over SE. slope.

59.00 Spur, projects SW.; desc. 200 ft. over NW. slope.

64.00 Ravine, drains SW.; asc. 80 ft. over SE. slope.

79.50 End of triangulation.

79.54 The cor. of secs. 1, 2, 11 and 12, previously described.

Land, mountainous.

Soil, rocky.

Timber, juniper and pinon.

Undergrowth, sagebrush and manzanita.

N. 0°19' W., bet. secs. 1 and 2.

By triangulation; desc. 40 ft. over NW. slope through scattering juniper and pinon.

5.00 Bottom of canyon, drains SW.; asc. 400 ft. over broken SE. slope.

28.30 End of triangulation; ridge, bears NE. and SW.; desc. 180 ft. over N. slope.

36.50 Draw, drains W.; asc. 55 ft. over S. slope; enter dense juniper and pinon.

40.53 The $\frac{1}{4}$ sec. cor. of secs. 1 and 2, monumented with a quartzite stone, 12x8x7 ins., firmly set, mkd. and witnessed as described in the official record.

From which the original bearing trees:

Dependent Resurvey of the Subdivision of T. 2 N., R. 24 E.

CHAINS

A juniper, 20 ins. diam., bears N. 56°15' E.,
37 lks. dist., mkd. ¼ S1 BT.

A juniper, 8 ins. diam., bears N. 30°50' W.,
32 lks. dist., mkd. ¼ S2 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 4 ins.
in the ground to bedrock, and in a mound of stone, 4
ft. base to top, with brass cap mkd.

T2N R24E

¼

S2|S1

1963

Deposit the original stone alongside the iron post.

N. 0°17' W., beginning new measurement.

Asc. 60 ft. over broken S. slope.

- 2.40 Wash, 1 ft. deep, 2 lks. wide, drains SW.
- 5.80 Spur, projects SW.; thence over broken W. slope across series of small draws and spurs; desc. 80 ft.
- 11.40 Wash, 2 ft. deep, 10 lks. wide, drains W.; asc. 60 ft.
- 13.30 Spur, projects W.; desc. 40 ft.
- 15.40 Wash, 3 ft. deep, 10 lks. wide, drains W.; asc. 65 ft.
- 17.40 Spur, projects W.; desc. 85 ft.
- 19.90 Wash, 5 ft. deep, 15 lks. wide, drains W.; asc. 125 ft.
- 24.40 Sandstone ledge, 5 ft. high, bears E. and W.
- 28.90 Spur, projects W.; leave dense timber; desc. 55 ft. over NW. slope.
- 33.90 Wash, 3 ft. deep, 10 lks. wide, drains SW.; asc. 40 ft. over SE. slope.
- 39.88 The cor. of secs. 1, 2, 35 and 36, on the N. bdy. of the Tp., monumented with an iron post, 2½ ins. diam., set, mkd. and witnessed as described in the official record.

Land, mountainous.

Soil, rocky.

Timber, juniper and pinon.

Undergrowth, sagebrush and manzanita.

From the cor. of secs. 2, 3, 34 and 35, on the S. bdy. of the Tp., previously described.

N. 1°18' W., bet. secs. 34 and 35.

Desc. 100 ft. over NE. slope through dense juniper and pinon.

11.40 Wash, 1 ft. deep, 3 lks. wide, drains NE.

22.90 Draw; wash, 3 ft. deep, 15 lks. wide, drains NE.; asc. 45 ft. over SE. slope.

32.50 Spur, projects NE.; desc. over gentle NW. slope.

Dependent Resurvey of the Subdivision of T. 2 N., R. 24 E.

GRAINS

- 40.20 Begin steep desc. over N. slope; desc. 20 ft.
- 41.42 The $\frac{1}{4}$ sec. cor. of secs. 34 and 35, monumented with a sandstone, 15x9x7 ins., firmly set, mkd. and witnessed as described in the official record.

From which the original bearing trees:

A juniper, 14 ins. diam., bears N. 24°30' E.,
16 lks. dist., mkd. $\frac{1}{4}$ S35 BT.

A juniper, 10 ins. diam., bears N. 80°30' W.,
15 lks. dist., mkd. $\frac{1}{4}$ S34 BT.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 14 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T2N R24E

$\frac{1}{4}$

S34|S35

1963

Deposit the original stone alongside the iron post.

N. 0°07' E., beginning new measurement.

By triangulation; desc. 40 ft. over steep N. slope through dense juniper.

- 5.00 Base of steep desc., bears E. and W.; thence desc. gradually over gentle NE. slope; all timber in this area has been fallen for reseeding project.
- 39.00 End of triangulation.
- 40.20 The cor. of secs. 26, 27, 34 and 35, monumented with a sandstone, 15x8x7 ins., firmly set and mkd. as described in the official record; all bearing trees have been destroyed.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 10 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T2N R24E

S27|S26

S34|S35

1963

Deposit the original stone alongside the iron post.

Land, rolling and gently rolling.

Soil, rocky.

Timber, juniper and scattering pinon S. $\frac{1}{2}$ mile.

Undergrowth, sagebrush.

From the cor. of secs. 25, 26, 35 and 36, previously described.

N. 89°38' W., bet. secs. 26 and 35.

Over gently rolling and broken desert land through scattering sagebrush.

Dependent Resurvey of the Subdivision of T. 2 N., R. 24 E.

CHAINS

2.50	Wash, 2 ft. deep, 10 lks. wide, drains N.
12.60	Old fence line, bears N. and S. 1.00 ch., thence W.
18.10	Wash, 2 ft. deep, 5 lks. wide, drains N.
24.50	Road, unimproved, bears N. and S.
25.50	Wash, 2 ft. deep, 8 lks. wide, drains N.
33.43	The $\frac{1}{2}$ sec. cor. of secs. 26 and 35, monumented with a sandstone, 20x12x8 ins., firmly set, mkd. and witnessed as described in the official record.
	At the cor. point
	Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 15 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.
	T2N R24E $\frac{1}{2}$ $\frac{S26}{S35}$ 1963
	Deposit the original stone alongside the iron post, and set a steel fence post alongside the cor.
	—————
	N. 89°54' W., beginning new measurement.
	Asc. gradually over gentle NE. slope through scattering sagebrush.
2.20	Wash, 1 ft. deep, 3 lks. wide, drains NE.
4.20	Road, unimproved, bears NE. and SW.
11.70	Road, unimproved, bears N. and S.
25.20	Enter reseeding project, bears N. and S.; all timber in this area has been fallen.
40.23	The cor. of secs. 26, 27, 34 and 35, previously described.
	Land, gently rolling. Soil, rocky. Timber, none. Undergrowth, scattering sagebrush.
	N. 0°26' E., bet. secs. 26 and 27.
	Desc. gradually over gentle NE. slope.
8.34	Enter juniper.
11.30	Spur, projects E.; barbed wire fence, bears E. and W.; leave juniper; desc. 120 ft. over NE. slope.
20.19	Trail road, bears E. and W.; thence desc. gradually over gentle NE. slope.
30.50	Tolivers Creek, dry, 10 ft. deep, 30 lks. wide, drains E.
36.39	Wash, 2 ft. deep, 3 lks. wide, drains E.

Dependent Resurvey of the Subdivision of T. 2 N., R. 24 E.

CHAINS
40.11

The $\frac{1}{2}$ sec. cor. of secs. 26 and 27, monumented with a sandstone, 14x10x2 ins., firmly set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T2N R24E

$\frac{1}{2}$
S27 | S26
1963

Deposit the original stone alongside the iron post, and raise a mound of stone, 3 ft. base, $2\frac{1}{2}$ ft. high, W. of cor.

N. $0^{\circ}26'$ E., beginning new measurement.

Over gentle N. slope, through medium sagebrush and grass.

5.70 Rut road, bears NE. and SW.

18.10 Old fence line, bears NE. and SW.

22.40 Dozed road, bears E. and W.

27.20 Dozed road, bears E. and W.

40.22 The cor. of secs. 22, 23, 26 and 27, monumented with a sandstone, 20x12x5 ins., firmly set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T2N R24E

S22 | S23
S27 | S26

Deposit the original stone alongside the iron post, and raise a mound of stone, 3 ft. base, $2\frac{1}{2}$ ft. high, W. of cor.

Land, nearly level.

Soil, sandy clay.

Timber, juniper S. 11.00 chs.

Undergrowth, scattering sagebrush.

From the cor. of secs. 23, 24, 25 and 26, previously described.

N. $89^{\circ}57'$ W., bet. secs. 23 and 26.

Asc. gradually over nearly level desert land through scattering sagebrush.

40.37 The $\frac{1}{2}$ sec. cor. of secs. 23 and 26, monumented with a sandstone, 18x10x5 ins., firmly set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

Dependent Resurvey of the Subdivision of T. 2 N., R. 24 E.

CHAINS

T2N R24E

$\frac{1}{4}$ S23

S26

1963

Deposit the original stone alongside the iron post, and raise a mound of stone, 3 ft. base, 2½ ft. high, N. of cor.

N. 89°43' W., beginning new measurement.

Asc. gradually over nearly level desert land through scattering sagebrush.

2.00 Road, unimproved, bears NE. and S.

20.00 Road, unimproved, bears N. and S.

40.25 The cor. of secs. 22, 23, 26 and 27, previously described.

Land, nearly level.

Soil, sandy clay.

Timber, none.

Undergrowth, scattering sagebrush and shadscale.

N. 0°15' E., bet. secs. 22 and 23.

Desc. 105 ft. over gentle N. slope through scattering sagebrush.

36.18 Power line, bears N. 70°54' E. and S. 70°54' W.

38.10 Wash, 2 ft. deep, 10 lks. wide, drains W.

39.00 Wash, 2 ft. deep, 10 lks. wide, drains W.

40.16 The $\frac{1}{4}$ sec. cor. of secs. 22 and 23, monumented with a sandstone, 20x12x5 ins., firmly set, mkd. and witnessed as described in the official record.

From which the original bearing tree:

A juniper, 10 ins. diam., bears S. 71°30' W.,
115 lks. dist., mkd. $\frac{1}{4}$ S22 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T2N R24E

$\frac{1}{4}$

S22 | S23

1963

Deposit the original stone alongside the iron post, and raise a mound of stone, 3 ft. base, 2½ ft. high, W. of cor.

N. 0°08' E., beginning new measurement.

.80 Spur, projects NW.; desc. over steep N. slope through dense brush and scattering pines to Green River.

3.18 Right bank of Green River, course E.; banks 3 to 6 ft. high, water at present low stage.

Dependent Resurvey of the Subdivision of T. 2 N., R. 24 E.

CHAINS

The meander cor. of secs. 22 and 23, monumented with a sandstone, 20x12x6 ins., firmly set and mkd. as described in the official record.

From which an original bearing tree:

A pine stump, 30 ins. diam., bears S. 70° W., mkd. R24E MC BT.

There is no remaining evidence of the other original bearing tree.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 16 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T2N R24E
M C
S22|S23
1963

Deposit the original stone alongside the iron post.

N. 0°47' E., beginning new measurement.

4.60 Point for the meander cor. of secs. 22 and 23, at proportionate distance, falls in river. Original cor. washed away.

5.31 Left bank of Green River.

Point for the meander cor. of secs. 22 and 23.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

T2N R24E
S22|S23
M C
1963

Asc. 40 ft. over gentle S. slope through heavy sagebrush.

16.70 Road, graded, bears E. and W., irregularly; begin steep asc. over S. slope; asc. 175 ft.

30.30 Spur, projects W.; enter scattering juniper; desc. 40 ft. over W. slope.

37.04 The cor. of secs. 14, 15, 22 and 23, monumented with a sandstone, 14x8x4 ins., firmly set, mkd. and witnessed as described in the official record.

From which the original bearing trees:

A juniper, 9 ins. diam., bears S. 63°45' E., 48 lks. dist., mkd. T2N R24E S23 BT.

A juniper, 10 ins. diam., bears S. 38°08' W., 109 lks. dist., mkd. T2N R24E S22 BT.

A juniper, 6 ins. diam., bears N. 36°54' W., 15 lks. dist., mkd. T2N R24E S15 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

Dependent Resurvey of the Subdivision of T. 2 N., R. 24 E.

CHAINS

T2N R24E
S15|S14
S22|S23
1963

Deposit the original stone alongside the iron post.
Land, rolling.
Soil, sandy and rocky.
Timber, scattering juniper; scattering pine and cotton-wood along river.
Undergrowth, sagebrush.

From the cor. of secs. 13, 14, 23 and 24, previously described.

S. 89°59' W., bet. secs. 14 and 23.

Asc. 85 ft. over broken SE. slope through scattered sagebrush.

1.60 Wash, 3 ft. deep, 10 lks. wide, drains SE.

10.70 Wash, 4 ft. deep, 25 lks. wide, drains SE.; enter scattering juniper.

27.50 Wash, 2 ft. deep, 6 lks. wide drains S.

40.39 The 1/2 sec. cor. of secs. 14 and 23, monumented with a sandstone, 16x8x6 ins., firmly set, mkd. and witnessed as described in the official record.

From which the original bearing trees:

A juniper, 6 ins. diam., bears S. 29°08' W., 108 lks. dist., mkd. 1/2 S23 BT.

A juniper, 8 ins. diam., bears N. 23°16' W., 56 lks. dist., mkd. 1/2 S14 BT.

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, and in a collar of stone, with brass cap mkd.

T2N R24E
S14
1/2 S23
1963

Deposit the original stone alongside the iron post, and raise a mound of stone, 3 ft. base, 2 1/2 ft. high, N. of cor.

West, beginning new measurement.

Asc. 120 ft. over broken SE. slope through scattering juniper.

.90 Small draw, drains S.

8.20 Spur, projects S.

10.70 Small draw, drains S.

16.20 Spur, bears N. and S.; desc. 130 ft. over W. slope.

25.50 Bottom of canyon; wash, 5 ft. deep, 30 lks. wide, drains S.; asc. 110 ft. over E. slope.

Dependent Resurvey of the Subdivision of T. 2 N., R. 24 E.

CHAINS

35.30

Spur, bears N. and S.; desc. 25 ft. over W. slope.

39.79

The cor. of secs. 14, 15, 22 and 23, previously described.

Land, rolling and broken.

Soil, sandy and rocky.

Timber, scattering juniper.

Undergrowth, scattering sagebrush and shadscale.

N. 0°36' E., bet. secs. 14 and 15.

Asc. 40 ft. over W. slope, changing to SW. slope through scattered juniper.

7.00

Top of wide ridge, bears N. and S.; thence asc. 90 ft. along top of ridge.

40.04

The 1/4 sec. cor. of secs. 14 and 15, monumented with a sandstone, 14x8x4 ins., firmly set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 18 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T2N R24E

1/4

S15 | S14

1963

Deposit the original stone alongside the iron post.

N. 0°27' E., beginning new measurement.

Asc. 160 ft. along top of ridge through scattering juniper.

40.18

The cor. of secs. 10, 11, 14 and 15, monumented with a sandstone, 10x8x4 ins., firmly set, mkd. and witnessed as described in the official record.

From which the original bearing trees:

A juniper, 8 ins. diam., bears N. 52°40' E., 115 lks. dist., mkd. T2N R24E S11 BT.

A juniper, 10 ins. diam., bears S. 61°15' E., 112 lks. dist., mkd. T2N R24E S14 BT.

A juniper, 8 ins. diam., bears S. 65°50' W., 210 lks. dist., mkd. T2N R24E S15 BT.

A juniper, 6 ins. diam., bears N. 68°40' W., 163 lks. dist., mkd. T2N R24E S10 BT.

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 18 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T2N R24E

S10 | S11

S15 | S14

1963

Deposit the original stone alongside the iron post.

Dependent Resurvey of the Subdivision of T. 2 N., R. 24 E.

CHAINS

Land, gently rolling.
Soil, sandy and rocky.
Timber, scattering juniper.
Undergrowth, scattering sagebrush and shadscale.

From the cor. of secs. 11, 12, 13 and 14, previously described.

N. 89°57' W., bet. secs. 11 and 14.

Asc. 35 ft. over W. slope through scattering juniper.

6.70 Spur, projects S.; desc. 115 ft. over SW. slope.

10.50 Wash, 5 ft. deep, 20 lks. wide, drains S.

21.10 Draw; wash, 10 ft. deep, 30 lks. wide, drains SE.; asc. 40 ft. over E. slope.

39.87 The 1/4 sec. cor. of secs. 11 and 14, monumented with a limestone, 15x10x6 ins., firmly set, mkd. and witnessed as described in the official record.

From which the original bearing tree:

A juniper, 8 ins. diam., bears N. 39° W.,
160 lks. dist., mkd. 1/4 S11 BT.

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.

T2N R24E

1/4 S11
S14
1963

Deposit the original stone alongside the iron post.

N. 89°51' W., beginning new measurement.

Asc. gradually over E. slope through scattering juniper.

4.00 Spur, projects S.; desc. 40 ft. over W. slope.

7.70 Wash, 2 ft. deep, 20 lks. wide, drains SE.; asc. 50 ft. over E. slope.

12.90 Spur, projects S.; thence asc. gradually over broken and rolling S. slope.

19.90 Wash, 1 ft. deep, 20 lks. wide, drains S.

33.80 Wash, 1 ft. deep, 30 lks. wide, drains S.

40.10 The cor. of secs. 10, 11, 14 and 15, previously described.

Land, rolling and broken.
Soil, sandy and rocky.
Timber, scattering juniper.
Undergrowth, scattering sagebrush and shadscale.

N. 0°31' E., bet. secs. 10 and 11.

Asc. 200 ft. over slightly broken S. slope through

Dependent Resurvey of the Subdivision of T. 2 N., R. 24 E.

CHAINS

40.19

The $\frac{1}{2}$ sec. cor. of secs. 10 and 11, monumented with a sandstone, 12x10x6 ins., firmly set, mkd. and witnessed as described in the official record.

From which the original bearing trees:

A juniper, 10 ins. diam., bears S. 38°10' E.,
72 lks. dist., mkd. $\frac{1}{2}$ S11 BT.

A pinon, 10 ins. diam., bears S. 59°05' W.,
109 lks. dist., mkd. $\frac{1}{2}$ S10 BT.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 20 ins. in the ground, and in a mound of stone, 2 ft. base to top, with brass cap mkd.

T2N R24E

$\frac{1}{2}$
S10 | S11
1963

Deposit the original stone alongside the iron post.

N. 1°46' W., beginning new measurement.

By triangulation; asc. 800 ft. over SW. slope through scattering juniper and pinon.

25.60

Spur, projects W. End of triangulation.

40.70

The cor. of secs. 2, 3, 10 and 11 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 4 ins. in the ground, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T2N R24E

S3 | S2
S10 | S11
1963

Land, gently rolling S. $\frac{1}{2}$ mile; mountainous N. $\frac{1}{2}$ mile.
Soil, sandy and rocky.

Timber, scattering juniper and pinon.

Undergrowth, sagebrush.

From the cor. of secs. 1, 2, 11 and 12, previously described.

S. 89°51' W., bet. secs. 2 and 11.

By triangulation; desc. 160 ft. over W. slope.

4.00

Canyon, drains SW., irregularly; asc. 160 ft. over SE. slope.

14.50

High spur, projects S.; desc. 240 ft. over SW. slope.

33.00

Canyon, drains SE., irregularly; asc. 280 ft. over E. slope.

37.00

Ridge, bears N. and S.; desc. 40 ft. over W. slope.

38.15

End of triangulation.

40.03

Point for the $\frac{1}{2}$ sec. cor. of secs. 2 and 11 at propor-

Dependent Resurvey of the Subdivision of T. 2 N., R. 24 E.

CHAINS

tionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 4 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T2N R24E
½ S2
S11
1963

Continue by triangulation.

Desc. 440 ft. over NW. slope.

58.00 Canyon, drains S.; asc. 320 ft. over broken SE. slope.

79.80 Ridge, bears N. and S.; desc. over SW. slope.

80.06 The cor. of secs. 2, 3, 10 and 11, previously described.

Land, mountainous.
Soil, rocky.
Timber, dense juniper and pinon.
Undergrowth, sagebrush and manzanita.

N. 0°13' W., bet. secs. 2 and 3.

Asc. 225 ft. along top of ridge, bearing N. and S., irregularly, through dense juniper and pinon.

14.90 Begin to desc. over NW. slope; desc. 15 ft.

19.60 Head of draw, drains W.; asc. 75 ft. over SW. slope.

26.00 Spur, projects W.; desc. 80 ft. over NW. slope.

33.00 Ravine, drains W.; asc. 140 ft. over SW. slope.

38.90 Top of ledge, 10 ft. high, bears E. and W.

40.68 The ½ sec. cor. of secs. 2 and 3, monumented with a sandstone, 15x8x5 ins., firmly set, mkd. and witnessed as described in the official record.

From which the original bearing trees:

A juniper, 12 ins. diam., bears N. 88° E., 34 lks. dist., mkd. ½ S2 BT.

A dead pinon, 14 ins. diam., bears N. 52° 10' W., 22 lks. dist., mkd. ½ S3 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 4 ins. in the ground, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T2N R24E
½
S3|S2
1963

Deposit the original stone alongside the iron post.

N. 103' W., beginning new measurement.

Dependent Resurvey of the Subdivision of T. 2 N., R. 24 E.

CRAGS

Asc. 195 ft. over broken SW. slope.

- 5.80 Head of draw, drains W.
- 13.60 Top of sandstone ledge, 15 ft. high, bears E. and W.; asc. 200 ft. over SE. slope.
- 23.20 Top of sandstone ledge, 6 ft. high, bears E. and W.
- 32.50 Top of asc.; thence across rolling land.
- 40.12 The cor. of secs. 2, 3, 34 and 35, on the N. bdy. of the Tp., monumented with an iron post, 2½ ins. diam., set, mkd. and witnessed as described in the official record.

Land, mountainous.
 Soil, rocky.
 Timber, juniper and pinon.
 Undergrowth, sagebrush and manzanita.

From the cor. of secs. 3, 4, 33 and 34, on the S. bdy. of the Tp., previously described.

N. 4°05' W., bet. secs. 33 and 34.

Desc. 50 ft. over ledgy NW. slope through dense pinon and juniper.

- 9.50 S. rim of Tollivers Canyon, bears NE. and SW.; desc. 260 ft. over ledgy NW. slope.
- 16.60 Tollivers Creek, 4 ins. deep, 8 lks. wide, course E., irregularly; asc. 290 ft. over SE. slope.
- 28.50 N. rim of Tollivers Canyon, bears E. and W., irregularly
- 34.50 Spur, projects E.; desc. 25 ft. over NE. slope.
- 41.70 The ½ sec. cor. of secs. 33 and 34, monumented with a sandstone, 20x8x4 ins., firmly set, mkd. and witnessed as described in the official record.

From which the original bearing trees:

- A pinon, 12 ins. diam., bears S. 58°15' E., 32 lks. dist., mkd. ½ S34 BT.
- A pinon, 12 ins. diam., bears N. 62°15' W., 26 lks. dist., mkd. ½ S33 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 4 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T2N R24E
 ½
 S33 | S34
 1963

Deposit the original stone alongside the iron post.

N. 0°18' E., beginning new measurement.

By triangulation; desc. 280 ft. over broken N. slope through dense pinon and juniper.

Dependent Resurvey of the Subdivision of T. 2 N., R. 24 E.

CHAINS

39.50	End of triangulation.
39.53	<p>The cor. of secs. 27, 28, 33 and 34, monumented with a sandstone, 20x10x6 ins., firmly set, mkd. and witnessed as described in the official record.</p> <p>From which the original bearing trees:</p> <p>A juniper, 10 ins. diam., bears N. 79° E., 50 lks. dist., mkd. T2N R24E S27 BT. A juniper, 12 ins. diam., bears S. 14°30' E., 40 lks. dist., mkd. T2N R24E S34 BT. A juniper, 18 ins. diam., bears S. 53°30' W., 78 lks. dist., mkd. T2N R24E S33 BT. A juniper, 12 ins. diam., bears N. 78°15' W., 38 lks. dist., mkd. T2N R24E S28 BT.</p> <p>At the cor. point</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 4 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.</p> <p style="text-align: center;">T2N R24E <u>S28</u> <u>S27</u> S33 S34 1963</p> <p>Deposit the original stone alongside the iron post.</p> <p>Land, mountainous. Soil, rocky. Timber, juniper and pinon. Undergrowth, sagebrush.</p>
24.00	<p>From the cor. of secs. 26, 27, 34 and 35, previously described.</p> <p>S. 89°35' W., bet. secs. 27 and 34.</p> <p>Asc. 120 ft. over rolling E. slope through dense juniper and pinon.</p> <p>Low ridge, bears N. and S.; desc. gradually over W. slope.</p>
36.50	Tollivers Creek, 4 ins. deep, 5 lks. wide, course N.
40.12	<p>The ¼ sec. cor. of secs. 27 and 34, monumented with a sandstone, 16x8x4 ins., firmly set, mkd. and witnessed as described in the official record.</p> <p>From which the original bearing trees:</p> <p>A juniper, 12 ins. diam., bears S. 81°30' E., 6 lks. dist., mkd. ¼ S34 BT. A juniper, 18 ins. diam., bears N. 82°15' W., 14 lks. dist., mkd. ¼ S27 BT.</p> <p>At the cor. point</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 16 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.</p> <p style="text-align: center;">T2N R24E ¼ <u>S27</u> ¼ <u>S34</u> 1963</p>

Dependent Resurvey of the Subdivision of T. 2 N., R. 24 E.

CHAINS

Deposit the original stone alongside the iron post.

S. $89^{\circ} 22'$ W., beginning new measurement.

Asc. 200 ft. over E. slope through dense juniper and pinon.

23.00 Top of asc.; begin desc. over NW. slope; desc. 80 ft.

40.11 The cor. of secs. 27, 28, 33 and 34, previously described.

Land, rolling.

Soil, rocky.

Timber, juniper and pinon.

Undergrowth, sagebrush.

N. $1^{\circ} 06'$ E., bet. secs. 27 and 28.

Desc. 200 ft. over rolling NW. slope through dense pinon and juniper.

40.78 The $\frac{1}{2}$ sec. cor. of secs. 27 and 28, monumented with a sandstone, 30x8x4 ins., firmly set, mkd. and witnessed as described in the official record.

From which the original bearing trees:

A juniper, 12 ins. diam., bears N. $37^{\circ} 45'$ E.,
56 lks. dist., mkd. $\frac{1}{2}$ S27 BT.

A juniper, 10 ins. diam., bears S. $73^{\circ} 30'$ W.,
43 lks. dist., mkd. $\frac{1}{2}$ S28 BT.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T2N R24E

$\frac{1}{2}$

S28 | S27

1963

Deposit the original stone alongside the iron post.

N. $0^{\circ} 26'$ W., beginning new measurement.

By triangulation; desc. 100 ft. over NW. slope through dense juniper and pinon.

17.00 Draw, drains NE.; asc. gradually over SE. slope.

28.30 End of triangulation; spur, projects NE.; desc. 175 ft. over NW. slope.

40.64 The cor. of secs. 21, 22, 27 and 28, monumented with a sandstone, 25x5x5 ins., firmly set, mkd. and witnessed as described in the official record.

From which the original bearing trees:

A juniper, 6 ins. diam., bears N. 56° E., 40
lks. dist., mkd. T2N R24E S22 BT.

A juniper, 10 ins. diam., bears S. $73^{\circ} 30'$ E.,
22 lks. dist., mkd. T2N R24E S27 BT.

A juniper, 12 ins. diam., bears S. 79° W., 16

Dependent Resurvey of the Subdivision of T. 2 N., R. 24 E.

CHAINS

lks. dist., mkd. T2N R24E S28 BT.
 A juniper, 12 ins. diam., bears N. $18^{\circ}15'$ W.,
 100 lks. dist., mkd. T2N R24E S21 BT.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins. in
 the ground to bedrock, and in a mound of stone, 5 ft.
 base to top, with brass cap mkd.

T2N R24E
S21|S22
S28|S27
 1963

Deposit the original stone alongside the iron post.

Land, rolling and mountainous.
 Soil, rocky.
 Timber, juniper and pinon.
 Undergrowth, sagebrush.

From the cor. of secs. 22, 23, 26 and 27, previously
 described.

N. $89^{\circ}43'$ W., bet. secs. 22 and 27.

Desc. gradually over nearly level desert land through
 scattering sagebrush and shadscale.

32.00 Enter scattering juniper.

40.19 The $\frac{1}{4}$ sec. cor. of secs. 22 and 27, monumented with a
 sandstone, 18x12x3 ins., firmly set, mkd. and witnessed
 as described in the official record.

From which the original bearing tree:

A juniper, 8 ins. diam., bears N. $54^{\circ}45'$ E.,
 100 lks. dist., mkd. $\frac{1}{4}$ S22 BT.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins.
 in the ground, with brass cap mkd.

T2N R24E
 $\frac{1}{4}$ S22
 $\frac{1}{4}$ S27
 1963

The above cor. is set, at cor. of old barbed wire fence
 bearing S. and NW.

Deposit the original stone alongside the iron post, and
 raise a mound of stone, 3 ft. base, $2\frac{1}{2}$ ft. high, N. of cor.

N. $89^{\circ}53'$ W., beginning new measurement.

Over nearly level desert land through scattering juniper.

15.60 Draw, 15 ft. deep, drains N., irregularly.

18.90 Enter dense juniper and pinon.

40.07 The cor. of secs. 21, 22, 27 and 28, previously described.

Dependent Resurvey of the Subdivision of T. 2 N., R. 24 E.

CHAINS

Land, gently rolling.
Soil, sandy clay and rocky.
Timber, juniper and pinon W. 1/2 mile.
Undergrowth, sagebrush and shadscale.

N. 111' W., bet. secs. 21 and 22.

Desc. 110 ft. over gently rolling NW. slope through dense juniper and pinon.

9.10 Leave timber.

16.37 Right bank of Green River, course N. 80° E., sandstone ledge 20 ft. high.


The meander cor. of secs. 21 and 22, which is an "X" mkd. on a sandstone ledge and MC on N. and 3 grooves on E. sides.

From which the original bearing tree:

- A juniper, 10 ins. diam., bears N. 59° E., 22 lks. dist., mkd. T2N R24E S22 MC BT.
- A juniper, 9 ins. diam., bears S. 66° 15' W., 40 lks. dist., mkd. T2N R.4E S21 MC BT.

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., in a mound of stone, 4 ft. base to top, with brass cap mkd.



N. 0°06' W., beginning new measurement.

6.12 Left bank of Green River.

Point for the meander cor. of secs. 21 and 22 as determined from the original bearing trees.

From which the original bearing trees:

- A dead juniper, 5 ins. diam., bears N. 29° E., 93 lks. dist., mkd. T2N R24E S22 MC BT.
- A juniper, 10 ins. diam., bears N. 45° W., 50 lks. dist., mkd. T2N R24E S21 MC BT.

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 4 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.



N. 0°27' E., beginning new measurement.

By triangulation.

Asc. 200 ft. over steep SE. slope.

Dependent Resurvey of the Subdivision of T. 2 N., R. 24 E.

CHAINS	
7.00	End of triangulation; N. rim of Green River Canyon, bears NE. and SW.; thence over gently rolling SE. slope.
17.81	The 1/4 sec. cor. of secs. 21 and 22, monumented with a sandstone, 20x13x5 ins., firmly set, mkd. and witnessed as described in the official record.
	At the cor. point
	Set an iron post, 30 ins. long, 2 1/2 ins. diam., 16 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.
	T2N R24E 1/4 S21 S22 1963
	Deposit the original stone alongside the iron post.
	N. 1° 26' E., beginning new measurement.
	Asc. gradually over gentle SE. slope through scattering sagebrush.
39.65	Dirt road, graded, bears E. and W.
40.03	Point for the cor. of secs. 15, 16, 21 and 22 at proportionate dist.; there is no remaining evidence of the original cor.
	Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.
	T2N R24E S16 S15 S21 S22 1963
	Land, rolling. Soil, sandy clay and rocky. Timber, juniper and pinon S. of Green River. Undergrowth, sagebrush and shadscale.
	From the cor. of secs. 14, 15, 22 and 23, previously described.
	S. 89° 59' W., bet. secs. 15 and 22.
	Over rolling land through scattering juniper and sagebrush; desc. 170 ft. over broken W. slope.
4.76	Bottom of canyon; wash, 4 ft. deep, 60 lks. wide, drains S.; asc. 100 ft. over E. slope.
17.50	W. rim of canyon, bears NW. and SE.; thence asc. 50 ft. over rolling and broken S. slope.
23.95	Power line, bears NW. and SE.
25.60	Dirt road, graded, bears NW. and SE.
40.12	The 1/4 sec. cor. of secs. 15 and 22, monumented with a quartzite stone, 14x10x6 ins., firmly set, mkd. and witnessed as described in the official record.
	From which the original bearing trees:

Dependent Resurvey of the Subdivision of T. 2 N., R. 24 E.

CRAINS

A juniper, 10 ins. diam., bears S. 23° W.,
262 lks. dist., mkd. $\frac{1}{4}$ S22 BT.
A juniper, 6 ins. diam., bears N. 60°36' W.,
179 lks. dist., mkd. $\frac{1}{4}$ S15 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T2N R24E

$\frac{1}{4}$ $\frac{S15}{S22}$
1963

Deposit the original stone alongside the iron post, and
raise a mound of stone, 3 ft. base, 2½ ft. high, N. of cor.

N. 89°50' W., beginning new measurement.

Continue over rolling and broken S. slope through
scattering juniper.

- 3.90 Wash, 2 ft. deep, 8 lks. wide, drains S.
15.70 Wash, 1 ft. deep, 4 lks. wide, drains S.
20.50 Wash, 3 ft. deep, 8 lks. wide, drains SE.; slope changes
to SE.
24.00 Leave juniper.
35.70 Small wash, drains S.
40.41 The cor. of secs. 15, 16, 21 and 22, previously described.

Land, rolling.
Soil, sandy clay and rocky.
Timber, juniper.
Undergrowth, sagebrush and shadscale.

N. 0°21' W., bet. secs. 15 and 16.

Asc. gradually over gently rolling SE. slope through
scattering sagebrush.

- 13.80 Wash, 5 ft. deep, 10 lks. wide, drains SE.
19.10 Power line, 4 wire, bears S. 74° E. and N. 74° W.
30.50 Small wash, drains SE.
40.02 The $\frac{1}{4}$ sec. cor. of secs. 15 and 16, monumented with a
sandstone, 14x14x5 ins., firmly set, mkd. and witnessed
as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins.
in the ground, and in a collar of stone, with brass cap
mkd.

T2N R24E

$\frac{1}{4}$
S16|S15
1963

Deposit the original stone alongside the iron post.

Dependent Resurvey of the Subdivision of T. 2 N., R. 24 E.

CHAINS

N. $0^{\circ}02'$ W., beginning new measurement.

Asc. gradually over rolling SE. slope through scattering juniper and pinon.

14.40 Wash, 5 ft. deep, 6 lks. wide, drains SE.

17.40 Dirt road, unimproved, bears NW. and SE.

29.90 Wash, 3 ft. deep, 8 lks. wide, drains E.

35.40 Wash, 5 ft. deep, 20 lks. wide, drains SE.

40.42 The cor. of secs. 9, 10, 15 and 16, monumented with a sandstone, 20x10x8 ins., firmly set, mkd. and witnessed as described in the official record.

From which the original bearing trees:

A juniper, 10 ins. diam., bears N. $23^{\circ}08'$ E.,
37 lks. dist., mkd. T2N R24E S10 BT.

A juniper, 7 ins. diam., bears S. $58^{\circ}25'$ E.,
67 lks. dist., mkd. T2N R24E S15 BT.

A juniper, 8 ins. diam., bears S. $73^{\circ}05'$ W.,
163 lks. dist., mkd. T2N R24E S16 BT.

A pinon, 14 ins. diam., bears N. 58° W., 45
lks. dist., mkd. T2N R24E S9 BT.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

T2N	R24E
S9	S10
S16	S15
1963	

Deposit the original stone alongside the iron post.

Land, gently rolling.

Soil, sandy clay and rocky.

Timber, juniper and pinon.

Undergrowth, sagebrush and shadscale.

From the cor. of secs. 11, 14 and 15, previously described.

N. $89^{\circ}56'$ W., bet. secs. 10 and 15.

Over rolling land through dense juniper and pinon.

3.50 Wash, 3 ft. deep, 20 lks. wide, drains S.

39.70 Wash, 8 ft. deep, 30 lks. wide, drains S.

40.31 The $\frac{1}{2}$ sec. cor. of secs. 10 and 15, monumented with a sandstone, 14x10x5 ins., firmly set, mkd. and witnessed as described in the official record.

From which the original bearing trees:

A juniper, 22 ins. diam., bears N. $73^{\circ}10'$ E.,
64 lks. dist., mkd. $\frac{1}{2}$ S10 BT.

A juniper, 10 ins. diam., bears S. $72^{\circ}30'$ E.,
65 lks. dist., mkd. $\frac{1}{2}$ S15 BT.

At the cor. point

Dependent Resurvey of the Subdivision of T. 2 N., R. 24 E.

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 15 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

R2N R24E

 $\frac{1}{4}$ S10

S15

1963

Deposit the original stone alongside the iron post.

N. $89^{\circ}18'$ W., beginning new measurement.

Over rolling land through dense juniper and pinon.

By triangulation.

12.50 Draw, drains S. irregularly.

17.00 Wash, drains S.; asc. 25 ft. over SE. slope.

39.06 End of triangulation.

40.84 The cor. of secs. 9, 10, 15 and 16, previously described.

Land, rolling.

Soil, sandy clay and rocky.

Timber, juniper and pinon.

Undergrowth, sagebrush.

N. $0^{\circ}06'$ E., bet. secs. 9 and 10.

Over rolling SE. slope through dense pinon and juniper; asc. 440 ft.

.70 Wash, 5 ft. deep, 20 lks. wide, drains SE.

9.70 Begin triangulation.

38.90 End of triangulation.

40.40 The $\frac{1}{4}$ sec. cor. of secs. 9 and 10, monumented with a sandstone, 6x3x2 ft., mkd. "X" at the exact cor. point and $\frac{1}{4}$ on the W. side.

From which the original bearing trees:

A pinon, 9 ins. diam., bears S. 80° E.

41 lks. dist., mkd. $\frac{1}{4}$ S10 BT.

A pinon, 14 ins. diam., bears S. $67^{\circ}10'$ W.,

21 lks. dist., mkd. $\frac{1}{4}$ S9 BT.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., on the exact point for the cor., and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T2N R24E

 $\frac{1}{4}$

S9/S10

1963

N. $0^{\circ}04'$ W., beginning new measurement.

Asc. 360 ft. over rocky S. slope.

17.00 Spur, projects SW.; thence along broken W. slope.

40.76 The cor. of secs. 3, 4, 9 and 10, monumented with a sandstone, 18x13x7 ins., firmly set, mkd. and witnessed as

Dependent Resurvey of the Subdivision of T. 2 N., R. 24 E.

CHAINS

described in the official record.

From which the original bearing trees:

- A pinon, 10 ins. diam., bears N. 69°10' E., 17 lks. dist., mkd. T2N R24E S3 BT.
- A pinon, 10 ins. diam., bears S. 66° E., 25 lks. dist., mkd. T2N R24E S10 BT.
- A juniper, 8 ins. diam., bears S. 52°10' W., 8 lks. dist., mkd. T2N R24E S9 BT.
- A pinon, 10 ins. diam., bears N. 70°15' W., 19 lks. dist., mkd. T2N R24E S4 BT.

At the cpr. point

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T2N R24E
 $\frac{S4}{S9} \frac{S3}{S10}$
 1963

Deposit the original stone alongside the iron post.

Land, mountainous.
 Soil, rocky.
 Timber, pinon and juniper.
 Undergrowth, sagebrush and manzanita.

From the cor. of secs. 2, 3, 10 and 11, previously described.

N. 89°32' W., bet. secs. 3 and 10.

Over mountainous land through dense pinon and juniper; by triangulation; desc. 360 ft. over ledgy SW. slope.

15.00 Canyon, drains S., irregularly; asc. 600 ft. over NE slope.

32.90 End of triangulation; spur, projects SE.; thence along S. slope.

40.07 Point for the ½ sec. cor. of secs. 3 and 10 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 3 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T2N R24E
 $\frac{1}{2} \frac{S3}{S10}$
 1963

Asc. gradually over broken S. slope.

44.60 Spur, projects SW.; desc. 440 ft. over NW. slope.

80.14 The cor. of secs. 3, 4, 9 and 10, previously described.

Land, mountainous.
 Soil, rocky.
 Timber, juniper and pinon.
 Undergrowth, sagebrush and manzanita.

Dependent Resurvey of the Subdivision of T. 2 N., R. 24 E.

CHAINS

N. 1°12' W., bet. secs. 3 and 4.

Over mountainous land through dense juniper and pinon.

- 1.00 Bottom of canyon, drains SW.; asc. 100 ft. over SE. slope.
- 15.70 Wash, 15 ft. deep, 30 lks. wide, drains E.; asc. 450 ft. over a S. slope.
- 31.30 Spur, projects W.; desc. 80 ft. over NW. slope.
- 37.00 Head of draw, drains W.; asc. 40 ft. over SW. slope.
- 40.33 Point for the $\frac{1}{2}$ sec. cor. of secs. 3 and 4 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 4 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T2N R24E

$\frac{1}{2}$
S4|S3
1963

Asc. 600 ft. over rocky and ledgy SW. slope.

- 62.70 Spur, projects W.; desc. 200 ft. over NW. slope.
- 81.06 The cor. of secs. 3, 4, 33 and 34, on the N. bdy. of the Tp., monumented with an iron post, $2\frac{1}{2}$ ins. diam., set, mkd. and witnessed as described in the official record.

Land, mountainous.
Soil, rocky.
Timber, juniper and pinon.
Undergrowth, sagebrush and manzanita.

From the cor. of secs. 4, 5, 32 and 33, on the S. bdy. of the Tp., previously described.

N. 2°06' W., bet. secs. 32 and 33.

Over mountainous land through dense pinon and juniper; by triangulation; asc. 400 ft. over steep S. slope.

- 15.30 Ridge, bears E. and W.; end of triangulation; desc. 650 ft. over rocky and ledgy NE. slope.
- 35.60 Ledge, 10 ft. high, bears E. and W.
- 41.64 Point for the $\frac{1}{2}$ sec. cor. of secs. 32 and 33 at proportionate dist.; there is no remaining evidence of the original cor.
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 4 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T2N R24E

$\frac{1}{2}$
S32|S33
1963

Continue by triangulation.

Desc. 680 ft. over rocky and ledgy NE. slope through

Dependent Resurvey of the Subdivision of T. 2 N., R. 24 E.

CHAINS

dense juniper and pinon.

83.10 End of triangulation.

83.28 The cor. of secs. 28, 29, 32 and 33, monumented with a sandstone, 18x10x6 ins., firmly set, mkd. and witnessed as described in the official record.

From which the original bearing trees:

A pinon, 14 ins. diam., bears S. 15°50' E., 173 lks. dist., mkd. T2N R24E S33 BT.
A pinon, 10 ins. diam., bears N. 47° W., 82 lks. dist., mkd. T2N R24E S29 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 4 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T2N R24E
S29|S28
S32|S33
1963

Deposit the original stone alongside the iron post.

Land, mountainous.

Soil, rocky.

Timber, juniper, pinon and scattering aspen and mahogany. Undergrowth, manzanita and sagebrush.

From the cor. of secs. 27, 28, 33 and 34, previously described.

N. 87°55' W., bet. secs. 28 and 33.

Over mountainous land through dense juniper and pinon; asc. 160 ft. over NE. slope.

6.00 Draw, drains NE.

39.58 The ¼ sec. cor. of secs. 28 and 33, monumented with a sandstone, 18x8x6 ins., firmly set, mkd. and witnessed as described in the official record.

From which the original bearing tree::

A pinon, 10 ins. diam., bears N. 57° E., 104 lks. dist., mkd. ¼ S28 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 3 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T2N R24E
¼ S28
¼ S33
1963

Deposit the original stone alongside the iron post.

S. 89°04' W., beginning new measurement.

Asc. 120 ft. over broken NE. slope.

Dependent Resurvey of the Subdivision of T. 2 N., R. 24 E.

CRAVNS
3.90

Wash, 4 ft. deep, 20 lks. wide, drains NE.

15.50

Spur, projects NE.; desc. 80 ft. over NW. slope.

22.30

Ravine, drains NE.; asc. 175 ft. over NE. slope.

39.74

The cor. of secs. 28, 29, 32 and 33, previously described.

Land, mountainous.
Soil, rocky.
Timber, juniper and pinon.
Undergrowth, sagebrush and manzanita.

N. 0° 27' W., bet. secs. 28 and 29.

Over mountainous land through dense juniper and pinon;
by triangulation; desc. 280 ft. over NE. slope.

27.00

Ravine, drains NE.; asc. 120 ft. over SE. slope.

36.00

Spur, projects NE.; desc. 100 ft. over N. slope.

40.55

Point for the 1/4 sec. cor. of secs. 28 and 29 at propor-
tionate dist.; there is no remaining evidence of the
original cor.

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 2 ins.
in the ground to bedrock, and in a mound of stone, 4 ft.
base to top, with brass cap mkd.

T2N R24E
1/4
S29 | S28
1963

Continue by triangulation.

Desc. 200 ft. over N. slope through dense juniper and
pinon.

46.68

Head of draw, drains NE.; thence desc. 240 ft. over
broken E. slope.

67.68

End of triangulation; spur, projects NE.; desc. 240 ft.
over N. slope.

76.79

Right bank of Green River, course E., banks 3 to 6 ft.
water at present low stage.

The meander cor. of secs. 28 and 29, monumented with a
sandstone, 12x10x6 ins., firmly set and mkd. 4 notches
on E. and MC on N. faces, and a mound of stone S. of
cor.; there is no remaining evidence of the original
bearing trees.

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins.
in the ground, and in a collar of stone, with brass cap
mkd.

T2N R24E
M C
S29 | S28
1963

Deposit the original stone alongside the iron post.

N. 2° 08' W., beginning new measurement.

Dependent Resurvey of the Subdivision of T. 2 N., R. 24 E.

CHAINS

4.00

Present left bank of the river.

4.87

Point for the cor. of secs. 20, 21, 28 and 29, as determined from the original bearing trees.

From which the original bearing trees:

A pine, 30 ins. diam., bears S. 86°15' E., 257 lks. dist., mkd. T2N R24E S28 MC BT.

A pine, 30 ins. diam., bears N. 73°50' W., 173 lks. dist., mkd. T2N R24E S20 BT.

This cor. also functions as the meander cor. of secs. 28 and 29.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T2N R24E
S20|S21
S29|S28
MC
1963

Land, mountainous.
Soil, rocky.
Timber, pine, juniper and pinon.
Undergrowth, sagebrush and manzanita.

19.86

From the cor. of secs. 21, 22, 27 and 28, previously described.

N. 88°44' W., bet. secs. 21 and 28; desc. 120 ft. over broken NW. slope.

Right bank of Green River, course NE.

The meander cor. of secs. 21 and 28, monumented with a sandstone, 16x12x3 ins., firmly set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 15 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T2N R24E
MC/S21
S28
1963

Deposit the original stone alongside the iron post.

S. 89°50' W., beginning new measurement.

10.83

Left bank of Green River.

Point for the meander cor. of secs. 21 and 28 as determined from the original bearing trees.

From which the original bearing trees:

A pine, 34 ins. diam., bears N. 59° E., 130 lks. dist., mkd. T2N R24E S21 MC BT.

Dependent Resurvey of the Subdivision of T. 2 N., R. 24 E.

CHAINS

A pine, 26 ins. diam., bears S. $51^{\circ}30'$ W.,
38 lks. dist., mkd. T2N R24E S28 MC. BT.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 4 ins.
in the ground to bedrock, and in a mound of stone, 4 ft.
base to top, with brass cap mkd.

T2N R24E

$\frac{S21}{S28}$ MC

1963

N. $89^{\circ}56'$ W., beginning new measurement.

Asc. 80 ft. over SE. slope.

2.87 Top of asc.; desc. 80 ft. over SW. slope.

9.38 The $\frac{1}{4}$ sec. cor. of secs. 21 and 28, monumented with a
sandstone, 3x2x1 ft., mkd. and witnessed as described
in the official record.

From which the original bearing trees:

A juniper, 7 ins. diam., bears S. 36° E.,
23 lks. dist., mkd. $\frac{1}{4}$ S28 BT.

A juniper, 10 ins. diam., bears N. 34° W.,
55 lks. dist., mkd. $\frac{1}{4}$ S21 BT.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 4 ins.
in the ground to bedrock, and in a mound of stone, 4 ft.
base to top, with brass cap mkd.

T2N R24E

$\frac{1}{4}$ $\frac{S21}{S28}$

1963

Deposit the original stone alongside the iron post.

S. $78^{\circ}02'$ W., beginning new measurement.

2.94 Left bank of Green River, course S. 60° E., banks 4 ft.
high, water at present low stage.

The meander cor. of secs. 21 and 28, monumented with a
sandstone, 30x24x18 ins., mkd. "X" at the exact point
of the cor. and MC on W. and 2 grooves on S. faces.

From which an original bearing tree:

A juniper, 12 ins. diam., bears N. 83° E., 46
lks. dist., mkd. T2N R24E S21 MC BT.

There is no remaining evidence of the other
bearing tree.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., on the
exact point for the cor., and in a mound of stone, 6 ft.
base to top, with brass cap mkd.

Dependent Resurvey of the Subdivision of T. 2 N., R. 24 E.

CHAINS

T2N R24E
~~S21~~
 MC ~~S28~~
 1963

S. 89°58' W., beginning new measurement.

The line now runs along the bottom of Green River above the present water line.

28.71 Left bank of Green River.

The meander cor. of secs. 21 and 28, monumented with a quartzite stone, 30x13x12 ins., firmly set, mkd. and witnessed as described in the official record.

From which the original bearing trees:

- A pine, 24 ins. diam., bears N. 74°30' E., 155 lks. dist., mkd. T2N R24E S21 MC BT.
- A pine, 32 ins. diam., bears S. 47°30' W., 26 lks. dist., mkd. T2N R24E S28 MC BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 5 ft. base to top, with brass cap mkd.

T2N R24E
~~S21~~
 S28 / MC
 1963

Deposit the original stone alongside the iron post.

N. 81°23' W., beginning new measurement.

Asc. gradually along S. slope.

8.81 The cor. of secs. 20, 21, 28 and 29, previously described.

Land, mostly rolling and along river bottom.

Soil, sandy and rocky.

Timber, pine, juniper and pinon.

Undergrowth, sagebrush and willows along banks of river.

N. 0°07' E., bet. secs. 20 and 21.

Asc. 320 ft. over broken SE. slope through dense juniper and pinon.

30.80 Top of asc.; thence desc. over gentle NE. slope; leave timber.

39.42 Point for the ¼ sec. cor. of secs. 20 and 21 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.

T2N R24E
 ¼
 S20 | S21
 1963

Dependent Resurvey of the Subdivision of T. 2 N., R. 24 E.

CREASE

Desc. gradually over gentle NE. slope.

44.30 Barbed wire fence, bears N. 70° W. and S. 70° E.

52.90 Barbed wire fence, bears N. 70° W. and S. 70° E.

76.30 Wash, 1 ft. deep, 20 lks. wide, drains E.

78.84 The cor. of secs. 16, 17, 21 and 22, monumented with a sandstone, 15x12x8 ins., firmly set, mkd. and witnessed as described in the official record.

From which the original bearing tree:

A juniper, 24 ins. diam., bears S. 36°48' E,
250 lks. dist., mkd. T2N R24E S21 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T2N R24E
S17|S16
S20|S21
1963

Deposit the original stone alongside the iron post, and raise a mound of stone, 3 ft. base, 2½ ft. high, W. of cor.

Land, rolling and gently rolling.
Soil, sandy clay and rocky.
Timber, juniper and pinon.
Undergrowth, sagebrush and shadscale.

From the cor. of secs. 15, 16, 21 and 22, previously described.

S. 89°49' W., bet. secs. 16 and 21.

Over gently rolling land through scattering sagebrush; asc. gradually over SE. slope along N. edge of dirt road.

3.90 Road turns NW.

4.90 Small wash, drains SE.

31.00 Enter scattering juniper.

34.90 Dozed road, bears NE. and SW.

40.00 Low ridge, bears N. 80° E. and S. 80° W.

40.41 The ¼ sec. cor. of secs. 16 and 21, monumented with a quartzite stone, 14x10x6 ins., firmly set, mkd. and witnessed as described in the official record.

From which the original bearing trees:

A juniper, 8 ins. diam., bears N. 59°17' E.,
54 lks. dist., mkd. ¼ S16 BT.
A juniper, 6 ins. diam., bears S. 20°25' W.,
118 lks. dist., mkd. ¼ S21 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

Dependent Resurvey of the Subdivision of T. 2 N., R. 24 E.

CHAINS

T2N R24E

 $\frac{1}{2}$ S16
 $\frac{1}{2}$ S21
 1963

Deposit the original stone alongside the iron post, and raise a mound of stone, 3 ft. base, 2½ ft. high, N. of cor.

S. 89°59' W., beginning new measurement.

Asc. 25 ft. over N. slope of low ridge, through scattering juniper.

4.50 Top of asc.; leave juniper; desc. 95 ft. over NW. slope.

20.80 Wash, 4 ft. deep, 15 lks. wide, drains S.; thence over gently rolling E. slope through heavy sagebrush.

28.70 Dozed road, bears N. and S.

40.31 The cor. of secs. 16, 17, 20 and 21, previously described.

Land, rolling and gently rolling.
 Soil, sandy clay and rocky.
 Timber, juniper and pinon.
 Undergrowth, sagebrush and shadscale.

N. 0°05' W., bet. secs. 16 and 17.

Over gently rolling land through heavy sagebrush and shadscale; asc. gradually over SE. slope.

32.10 Enter dense juniper and pinon.

40.43 The ½ sec. cor. of secs. 16 and 17, monumented with a quartzite stone, 10x10x6 ins., firmly set, mkd. and witnessed as described in the official record.

From which the original bearing tree:

A juniper, 18 ins. diam., bears N. 73°30' W.,
 24 lks. dist., mkd. ½ S17 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

T2N R24E

 $\frac{1}{2}$ S17
 $\frac{1}{2}$ S16
 1963

Deposit the original stone alongside the iron post.

N. 0°19' W., beginning new measurement.

Continue over gentle SE. slope through dense juniper and pinon.

2.60 Power line, 4 wire, bears N. 73°45' W. and S. 73°45' E.

40.52 The cor. of secs. 8, 9, 16 and 17, monumented with a sandstone, 18x10x7 ins., firmly set, mkd. and witnessed as described in the official record.

Dependent Resurvey of the Subdivision of T. 2 N., R. 24 E.

CHAINS

From which the original bearing trees:

- A juniper, 7 ins. diam., bears N. 82°45' E., 42 lks. dist., mkd. T2N R24E S9 BT.
- A juniper, 10 ins. diam., bears S. 30°20' E., 58 lks. dist., mkd. T2N R24E S16 BT.
- A pinon, 8 ins. diam., bears S. 21°33' W., 30 lks. dist., mkd. T2N R24E S17 BT.
- A juniper, 18 ins. diam., bears N. 73°30' W., 24 lks. dist., mkd. T2N R24E S8 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T2N R24E
 $\frac{S8}{S9}$
 $\frac{S17}{S16}$
 1963

Deposit the original stone alongside the iron post, and raise a mound of stone, 3 ft. base, 2½ ft. high, W. of cor.

Land, gently rolling.
 Soil, sandy clay.
 Timber, juniper and pinon.
 Undergrowth, sagebrush and shadscale.

From the cor. of secs. 9, 10, 15 and 16, previously described.

N. 89°51' W., bet. secs. 9 and 16.

Over gently rolling land through dense juniper and pinon; asc. gradually over SE. slope.

29.00 Dirt road, graded, bears NW. and SE.; slope changes to NE.; asc. gradually.

40.37 The ¼ sec. cor. of secs. 9 and 16, monumented with a sandstone, 16x12x7 ins., firmly set, mkd. and witnessed as described in the official record.

From which the original bearing trees:

- A juniper, 16 ins. diam., bears S. 61° E., 47 lks. dist., mkd. ¼ S16 BT.
- A juniper, 12 ins. diam., bears N. 82°09' W., 132 lks. dist., mkd. ¼ S9 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T2N R24E
 $\frac{1}{4} \frac{S9}{S16}$
 1963

Deposit the original stone alongside the iron post, and raise a mound of stone, 3 ft. base, 2½ ft. high, N. of cor.

West, beginning new measurement.

Asc. gradually over NE. slope through dense juniper and pinon.

Dependent Resurvey of the Subdivision of T. 2 N., R. 24 E.

CHAINS	
12.10	Low ridge, bears NW. and SE.; desc. 100 ft. over rolling NW. slope.
40.40	The cor. of secs. 8, 9, 16 and 17, previously described. Land, gently rolling. Soil, sandy clay and rocky. Timber, juniper and pinon. Undergrowth, sagebrush and shadscale.
	N. 0°07' E., bet. secs. 8 and 9. Over rolling and broken NW. slope through dense juniper and pinon.
.40	Wash, 1 ft. deep, 10 lks. wide, drains W.
3.50	Low spur, projects W.
12.80	Draw; wash, 1 ft. deep, 30 lks. wide, drains W.
18.40	Low spur, projects W.
23.20	Leave timber.
25.50	Draw, drains W.
27.00	Dirt road, graded, bears E. and W.
31.00	Base of mountain, bears E. and W.; asc. 60 ft. over S. slope; enter dense juniper.
40.07	The 1/2 sec. cor. of secs. 8 and 9, monumented with a sandstone, 20x11x4 ins., firmly set, mkd. and witnessed as described in the official record. From which the original bearing trees: A juniper, 10 ins. diam., bears N. 63°15' E., 12 lks. dist., mkd. 1/2 S9 BT. A juniper, 7 ins. diam., bears S. 54°15' W., 24 lks. dist., mkd. 1/2 S8 BT. At the cor. point Set an iron post, 30 ins. long, 2 1/2 ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd. T2N R24E 1/2 S8 S9 1963 Deposit the original stone alongside the iron post. North, beginning new measurement. Over mountainous land through dense juniper; by triangulation; asc. 500 ft. over rocky S. slope.
21.70	End of triangulation; spur, projects W.; desc. 600 ft. over NW. slope.
38.00	Red Creek Canyon, drains SW.; there is no water at this point and a trail road follows along the bottom of the canyon.
40.95	Point for the cor. of secs. 4, 5, 8 and 9, as established from an original bearing tree.

Dependent Resurvey of the Subdivision of T. 2 N., R. 24 E.

CHAINS

From which an original bearing tree:

A juniper, 8 ins. diam., bears N. 69° W.,
224 lks. dist., mkd. T2N R24E S5 BT.
There is no remaining evidence of any other
original bearing trees.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in
the ground, and in a collar of stone, with brass cap mkd.

T2N R24E

 $\frac{S5}{S8}$ S4

S9

1963

Land, mountainous.

Soil, rocky.

Timber, juniper and pinon.

Undergrowth, shadscale, sagebrush and manzanita.

From the cor. of secs. 3, 4, 9 and 10, previously
described.S. $89^{\circ}55'$ W., bet. secs. 4 and 9.

Over mountainous land through dense pinon and juniper;
desc. gradually over NW. slope.

- 1.00 Bottom of canyon; wash, 1 ft. deep, 20 lks. wide, drains
S., irregularly; asc. 175 ft. over SE. slope.
- 15.00 Spur, projects S.; desc. 105 ft. over W. slope.
- 22.10 Ravine, drains S.; asc. 45 ft. over SE. slope.
- 27.00 Spur, projects S.; asc. 45 ft. over broken S. slope.
- 40.40 The $\frac{1}{4}$ sec. cor. of secs. 4 and 9, monumented with a
quartzite stone, 14x7x5 ins., firmly set, mkd. and wit-
nessed as described in the official record.

From which the original bearing trees:

A pinon, 12 ins. diam., bears S. $82^{\circ}47'$ W.,
222 lks. dist., mkd. $\frac{1}{4}$ S9 BT.
A juniper, 10 ins. diam., bears N. $78^{\circ}04'$ W.,
184 lks. dist., mkd. $\frac{1}{4}$ S4 BT.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 3 ins. in
the ground to bedrock, and in a mound of stone, $3\frac{1}{2}$ ft.
base to top, with brass cap mkd.

T2N R24E

 $\frac{1}{4}$ $\frac{S4}{S9}$

1963

Deposit the original stone alongside the iron post.

S. $89^{\circ}57'$ W., beginning new measurement.

Desc. 20 ft. over S. slope.

Dependent Resurvey of the Subdivision of T. 2 N., R. 24 E.

CHAINS	
3.50	Point of rocky spur, projects W. approximately 5.00 chs., thence NW.; desc. 100 ft. over point of spur.
8.00	Leave spur, desc. 585 ft. over NW. slope.
39.60	Red Creek Canyon; wash, 1 ft. deep, 50 lks. wide, drains S.; there is no water in Red Creek at this time and a trail road follows along the bottom of the canyon.
40.61	The cor. of secs. 4, 5, 8 and 9, previously described. Land, mountainous. Soil, rocky. Timber, juniper and pinon. Undergrowth, sagebrush and manzanita.
	N. 3°06' W., bet. secs. 4 and 5. Over mountainous land through scattering juniper and pinon; asc. 180 ft. over SE. slope along W. side of Red Creek Canyon.
.30	Trail road, follows along bottom of Red Creek Canyon, bears irregularly N. and S.
4.70	Red Creek; dry wash, 10 ft. deep, 30 lks. wide, at curve from NE. to SE.
13.80	Spur, projects E.; desc. 180 ft. over broken NE. slope.
38.10	Red Creek; dry wash, 7 ft. deep, 100 lks. wide, drains S., irregularly; thence along bottom of Red Creek Canyon.
41.15	The $\frac{1}{4}$ sec. cor. of secs. 4 and 5, monumented with a quartzite stone, 12x8x6 ins., firmly set, mkd. and witnessed as described in the official record. At the cor. point. Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 4 ins. in the ground to bedrock, and in a mound of stone, 3 $\frac{1}{2}$ ft. base to top, with brass cap mkd. T2N R24E $\frac{1}{4}$ S5 S4 1963 Deposit the original stone alongside the iron post.
	N. 0°47' E., beginning new measurement. Asc. 130 ft. over S. slope along W. side of Red Creek Canyon.
5.80	Spur, projects W.; desc. gradually over W. slope.
17.30	Red Creek, drains S., irregularly; from NW., continue along broken W. slope.
21.80	Wash, 1 ft. deep, 10 lks. wide, drains SW.; asc. 285 ft. over broken SE. slope.
25.34	Wash, 1 ft. deep, 10 lks. wide, drains SE.

Dependent Resurvey of the Subdivision of T. 2 N., R. 24 E.

CHAINS

- 39.50 Spur, projects E.; desc. 60 ft. over NE. slope.
- 40.93 The cor. of secs. 4, 5, 32 and 33, monumented with an iron post, 2½ ins. diam., set, mkd. and witnessed as described in the official record.
- Land, mountainous.
Soil, rocky.
Timber, scattering juniper and pinon.
Undergrowth, sagebrush and manzanita.
- From the cor. of secs. 5, 6, 31 and 32, on the S. bdy. of the Tp., previously described.
- N. 3°07' W., bet. secs. 31 and 32.
- By triangulation; asc. 240 ft. over broken SE. slope through heavy sagebrush and shadscale.
- 15.00 Enter pinon, mahogany and juniper; asc. 300 ft. over S. slope.
- 32.00 S. crest of ridge, bears NE. and SW.; thence across top of broad ridge.
- 40.94 Point for the ½ sec. cor. of secs. 31 and 32 at proportionate dist.; there is no remaining evidence of the original cor.
- Set an iron post, 30 ins. long, 2½ ins. diam., 2 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.
- T2N R24E
½
S31|S32
1963
- Continue by triangulation; asc. gradually over SE. slope.
- 43.00 End of triangulation; ridge, bears NE. and SW.; desc. 400 ft. over NW. slope.
- 75.00 Main ridge, bears NW. and SE.; thence along top of ridge.
- 81.88 The cor. of secs. 29, 30, 31 and 32, monumented with a sandstone, 18x12x5 ins., set, mkd. and witnessed as described in the official record.
- From which the original bearing trees:
- A pine, 16 ins. diam., bears N. 56°15' E.,
44 lks. dist., mkd. T2N R24E S29 BT.
A pine, 14 ins. diam., bears S. 17° E., 133
lks. dist., mkd. T2N R24E S32 BT.
A pine, 14 ins. diam., bears S. 76°15' W.,
83 lks. dist., mkd. T2N R24E S31 BT.
A juniper, 8 ins. diam., bears N. 39° W.,
4 lks. dist., mkd. T2N R24E S30 BT.
- At the cor. point
- Set an iron post, 30 ins. long, 2½ ins. diam., 4 ins. in the ground to bedrock, and in a mound of stone, 5½ ft. base to top, with brass cap mkd.

Dependent Resurvey of the Subdivision of T. 2 N., R. 24 E.

CHAINS

T2N R24E
S30|S29
S31|S32
1963

Deposit the original stone alongside the iron post.
Land, mountainous.
Soil, sandy clay and rocky.
Timber, juniper, pinon, mahogany and pine.
Undergrowth, sagebrush and shadscale.

- 40.14 From the cor. of secs. 28, 29, 32 and 33, previously described.
S. 88°55' W., bet. secs. 29 and 32.
Over mountainous land through dense mahogany, juniper and pinon; asc. 800 ft. over NE. slope.
Point for the ¼ sec. cor. of secs. 29 and 32 at proportionate dist.; there is no remaining evidence of the original cor.
Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground to bedrock, and in a mound of stone, 3½ ft. base to top, with brass cap mkd.
T2N R24E
¼ S29
S32
1963
- 41.60 Continue over NE. slope; asc. gradually.
Spur, projects N.; thence by triangulation.
Desc. 130 ft. over NW. slope.
- 53.00 Ravine, drains NE.; asc. 200 ft. over NE. slope.
- 65.00 Head of draw, drains NE.; thence asc. 200 ft. over E. slope.
- 72.00 End of triangulation.
- 79.00 Top of ridge, bears NW. and SE.
- 80.28 The cor. of secs. 29, 30, 31 and 32, previously described.
Land, mountainous.
Soil, rocky.
Timber, mahogany, juniper, pinon and pine.
Undergrowth, sagebrush and manzanita.
- 20.70 S. 88°56' W., bet. secs. 30 and 31.
Over rolling mountain top through dense pine and mahogany; desc. 80 ft. over SW. slope.
Leave timber.
- 24.20 Dirt road, unimproved, bears NE. and SW. along bottom of draw draining SW.; asc. 290 ft. E. slope.
- 40.08 The ¼ sec. cor. of secs. 30 and 31, which is an "x" mkd. on a stationary sandstone, 4x4x3 ft. and witnessed as described in the official record.

Dependent Resurvey of the Subdivision of T. 2 N., R. 24 E.

From which the original bearing tree:

A dead mahogany, 6 ins. diam., bears
S. 51°50' W.; 50 lks. dist., mkd. $\frac{1}{2}$ S32 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., on solid sandstone and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T2N R24E

$\frac{1}{2}$ $\frac{S30}{S31}$

1963

S. 89°23' W., beginning new measurement.

Asc. 175 ft. over E. slope through scattering juniper, mahogany, pine and pinon:

4.00 Ridge, bears NE. and SW.; desc. 425 ft. over NW. slope.

36.28 The cor. of secs. 30 and 31, on the W. bdy. of the Tp., previously described.

Land, mountainous.

Soil, rocky.

Timber, juniper, pinon, pine and mahogany.

Undergrowth, sagebrush, service berry and manzanita.

From the cor. of secs. 29, 30, 31 and 32, previously described.

N. 1°10' E., bet. secs. 29 and 30.

Over mountainous land through dense pine, mahogany and pinon; asc. 150 ft. along top of ridge.

16.00 Spur, projects E.; leave ridge; desc. 600 ft. over NE. slope.

18.80 Enter dense aspen.

24.90 Leave aspen.

41.48 Point for the $\frac{1}{2}$ sec. cor. of secs. 29 and 30 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 2 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T2N R24E

$\frac{1}{2}$ $\frac{S30}{S29}$

1963

Desc. 1275 ft. over rocky NE. slope.

82.96 Point for the cor. of secs. 19, 20, 29 and 30 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

Dependent Resurvey of the Subdivision of T. 2 N., R. 24 E.

CHAINS

T2N R24E
S19 S20
S30 S29
1963

Land, mountainous.
Soil, rocky.
Timber, pine, pinon, juniper, mahogany and aspen.
Undergrowth, sagebrush and manzanita.

From the cor. of secs. 20, 21, 28 and 29, previously described.

S. 87°33' W., bet. secs. 20 and 29.

Desc. over left bank of Green River, thence along the bottom of the river bed.

18.14 Right bank of Green River; at this point, the course of the river is S. 70° E., banks 4 to 8 ft. high, water at present low stage.

The meander cor. of secs. 20 and 29, monumented with a sandstone, 15x8x5 ins., firmly set, and mkd. as described in the official record; there is no remaining evidence of the original bearing trees.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

T2N R24E
S20 M
S29 C
1963

Deposit the original stone alongside the iron post.

N. 89°17' W., beginning new measurement.

Asc. 180 ft. over rocky NE. slope through dense juniper and pinon.

21.17 Point for the ¼ sec. cor. of secs. 20 and 29 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T2N R24E
¼ S20
S29
1963

Continue over NE. slope through dense juniper and pinon; asc. 320 ft.

40.40 Leave timber.

60.56 The cor. of secs. 19, 20, 29 and 30, previously described.

Land, mountainous.
Soil, rocky.
Timber, juniper and pinon.
Undergrowth, sagebrush and manzanita.

Dependent Resurvey of the Subdivision of T. 2 N., R. 24 E.

CHAINS

S. 87°28' W., bet. secs. 19 and 30.

Over mountainous land through scattering juniper and pinon; by triangulation; asc. 600 ft. over rocky NE. slope.

39.41

Point for the $\frac{1}{4}$ sec. cor. of secs. 19 and 30 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to bedrock, and in a mound of stone, 3½ ft. base to top, with brass cap mkd.

T2N R24E

$\frac{1}{4}$ S19

S30

1963

Asc. 185 ft. over NE. slope.

42.00

Top of ledge, 20 ft. high, bears N. and S.; desc. 80 ft. over rolling N. slope through dense pinon and juniper.

78.42

End of triangulation.

The cor. of secs. 19 and 30, on the W. bdy. of the Tp., previously described.

Land, mountainous.

Soil, rocky.

Timber, pinon and juniper.

Undergrowth, sagebrush and manzanita.

From the cor. of secs. 19, 20, 29 and 30, previously described.

N. 4°20' W., bet. secs. 19 and 20.

Over mountainous land through dense pinon, juniper and pine; desc. 440 ft. over NE. slope.

17.42

Right bank of Green River, course S. 80° E., banks 5 ft. high, water at present low stage.

Point for the meander cor. of secs. 19 and 20, at proportionate distance; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

T2N R24E

MC

S19 S20

1963

21.61

Left bank of Green River.

The meander cor. of secs. 19 and 20, monumented with a sandstone, 18x6x6 ins., firmly set, mkd. and witnessed as described in the official record.

From which the original bearing trees:

A pine, 30 ins. diam., bears S. 42°17' E., 57 lks. dist., mkd. T2N R24E S20 MC BT.

A pine, 24 ins. diam., bears S. 51° W., 15 lks. dist., mkd. T2N R24E S19 MC BT.

Dependent Resurvey of the Subdivision of T. 2 N., R. 24 E.

CHAINS

BRITAIN

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T2N R24E
S19|S20
M C
1963

Deposit the original stone alongside the iron post.

N. 1°22' W., beginning new measurement.

By triangulation; asc. 520 ft. over S. slope through dense pinon and juniper.

17.09

The ¼ sec. cor. of secs. 19 and 20, monumented with a sandstone, 30x10x6 ins., firmly set, mkd. and witnessed as described in the official record.

From which the original bearing trees:

A pine, 16 ins. diam., bears N. 87°15' E., 55 lks. dist., mkd. ¼ S20 BT.

A pine, 30 ins. diam., bears S. 58°10' W., 30 lks. dist., mkd. ¼ S19 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T2N. R24E.
¼
S19|S20
1963.

Deposit the original stone alongside the iron post.

N. 0°08' E., beginning new measurement.

Continue by triangulation; asc. 80 ft. over S. slope.

2.70

N. rim of Green River Canyon, bears E. and W.; asc. gradually over broken E. slope.

18.40

Spur, projects E.; end of triangulation; desc. 240 ft. over NE. slope.

31.40

Wash, 1 ft. deep, 10 lks. wide, drains NE.

40.02

The cor. of secs. 17, 18, 19 and 20, which is an "X" mkd. on a stationary quartzite ledge and witnessed as described in the official record:

From which the original bearing trees:

A pine, 11 ins. diam., bears N. 26°56' E., 23 lks. dist., mkd. T2N R24E S17 BT.

A juniper, 8 ins. diam., bears S. 33° E., 14 lks. dist., mkd. T2N R24E S20 BT.

Dependent Resurvey of the Subdivision of T. 2 N., R. 24 E.

CHAINS

A pine, 12 ins. diam., bears S. 25°10' W.,
32 lks. dist., mkd. T2N R24E S19 BT.
A pine, 24 ins. diam., bears N. 58°15' W.,
82 lks. dist., mkd. T2N R24E S18 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., on the exact point for the cor., and in a mound of stone, 6 ft. base to top, with brass cap mkd.

T2N R24E
S18 S17
S19 S20
1963

Land, mountainous.
Soil, rocky.
Timber, juniper, pinon and pine.
Undergrowth, sagebrush.

From the cor. of secs. 16, 17, 20 and 21, previously described.

West, bet. secs. 17 and 20.

Over gently rolling land through scattering juniper and heavy sagebrush.

4.70 Wash, 5 ft. deep, 20 lks. wide, drains SE.; asc. gradually over gentle NE. slope.

25.70 Enter dense juniper.

40.39 The ¼ sec. cor. of secs. 17 and 20, monumented with a sandstone, 18x12x12 ins., firmly set, mkd. and witnessed as described in the official record.

From which the original bearing trees:

A juniper, 18 ins. diam., bears N. 84°15' E.,
94 lks. dist., mkd. ¼ S17 BT.
A juniper, 20 ins. diam., bears S. 0°30' W.,
278 lks. dist., mkd. ¼ S20 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T2N R24E
¼ S17
¼ S20
1963

Deposit the original stone alongside the iron post, and raise a mound of stone, 2½ ft. base, 2 ft. high, N. of cor.

S. 89°59' W., beginning new measurement.

Over gently rolling land through dense juniper; by triangulation; asc. gradually.

40.41 End of triangulation.

The cor. of secs. 17, 18, 19 and 20, previously described.

Dependent Resurvey of the Subdivision of T. 2 N., R. 24 E.

CHAINS

SWTAKO

Land, gently rolling.
Soil, sandy clay and rocky.
Timber, juniper and pinon.
Undergrowth, sagebrush.

S. 89°52' W., bet. secs. 18 and 19.

Over NE. slope through dense juniper and pinon; asc. 120 ft.

18.10 E. rim of Green River Canyon, bears N. and SE.; thence by triangulation; desc. 560 ft. over W. slope.

33.14 Left bank of Green River, course S.

Point for the meander cor. of secs. 18 and 19 as determined from an original bearing tree.

From which an original bearing tree:

A pine, 16 ins. diam., bears N. 31°20' E., 22 lks. dist., mkd. T2N R24E S18 MC BT.
There is no remaining evidence of the other original bearing tree.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 4 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T2N R24E
M | S18
C | S19
1963

West, beginning new measurement.

5.68 Point for the ¼ sec. cor. of secs. 18 and 19 at proportionate dist. falls in the river.

6.80 Right bank of Green River.

The meander cor. of secs. 18 and 19, monumented with a sandstone, 16x10x8 ins., firmly set, mkd. and witnessed as described in the official record.

From which the original bearing trees:

A pinon, 14 ins. diam., bears S. 3° W., 29 lks. dist., mkd. T2N R24E S19 MC BT.
A juniper, 14 ins. diam., bears N. 0°30' W., 55 lks. dist., mkd. T2N R24E S18 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 4 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T2N R24E
S18 | M
S19 | C
1963

Deposit the original stone alongside the iron post.

Dependent Resurvey of the Subdivision of T. 2 N., R. 24 E.

CHAINS

S. 86°45' W., beginning new measurement.

Continue by triangulation; asc. 500 ft. over NE. slope.

11.00 W. rim of Green River Canyon, bears NW. and SE.; thence along broken N. slope through dense juniper and pinon.

11.10 End of triangulation.

15.30 Begin desc. over W. slope; desc. 80 ft.

25.80 Ravine, drains N.; asc. 200 ft. over NE. slope.

36.43 The cor. of secs. 18 and 19, on the W. bdy. of the Tp., previously described.

Land, mountainous.

Soil, rocky.

Timber, juniper, pinon and pine.

Undergrowth, sagebrush and manzanita.

From the cor. of secs. 17, 18, 19 and 20, previously described.

N. 0°10' E., bet. secs. 17 and 18.

Over rolling and broken land through dense pinon and juniper; desc. gradually over gentle NE. slope.

30.10 Low spur, projects NE.; desc. 155 ft. over NW. slope.

39.97 The 1/2 sec. cor. of secs. 17 and 18, monumented with a sandstone, 20x10x7 ins., firmly set, mkd. and witnessed as described in the official record.

From which the original bearing trees:

A pine, 10 ins. diam., bears S. 72° E., 17 lks. dist., mkd. 1/2 S17 BT.

A pine, 12 ins. diam., bears N. 54°30' W., 8 lks. dist., mkd. 1/2 S18 BT.

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T2N R24E

1/2

S18|S17

1963

Deposit the original stone alongside the iron post.

N. 1°26' W., beginning new measurement.

Desc. 85 ft. over NW. slope through dense pinon and juniper.

16.90 Red Creek, dry at this point; wash, 2 ft. deep, 2.00 chs. wide, drains W. approximately 1.00 ch., thence S.; asc. 270 ft. over SE. slope.

18.03 Power line, bears N. 84°19' W. and S. 84°19' E.

40.85 Point for the cor. of secs. 7, 8, 17 and 18 at propor-

Dependent Resurvey of the Subdivision of T. 2 N., R. 24 E.

CHAINS

tionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T2N	R24E
S7	S8
S18	S17
1963	

Land, rolling and mountainous.
Soil, rocky.
Timber, juniper, pinon and pine.
Undergrowth, sagebrush and manzanita.

From the cor. of secs. 8, 9, 16 and 17, previously described.

S. $89^{\circ}55'$ W., bet. secs. 8 and 17.

Over mountainous land through dense juniper and pinon; desc. 120 ft. over broken NW. slope.

14.00 Slope changes to W.; desc. 50 ft.

20.00 Leave timber.

21.10 Barbed wire fence, bears N. and S.

21.40 Dirt road, unimproved, bears N. and S.

28.60 Red Creek, dry at this point; wash, 6 ft. deep, 1.00 ch. wide, drains SW.; asc. gradually over gentle SE. slope.

40.70 Point for the $\frac{1}{4}$ sec. cor. of secs. 8 and 17 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T2N	R24E
$\frac{1}{4}$	S8
	S17
1963	

Thence by triangulation; asc. 175 ft. over broken SE. slope.

52.60 Draw, drains SE.

81.40 The cor. of secs. 7, 8, 17 and 18, previously described.

Land, mountainous.
Soil, rocky.
Timber, juniper and pinon.
Undergrowth, sagebrush and manzanita.

N. $86^{\circ}06'$ W., bet. secs. 7 and 18.

Asc. 120 ft. over broken SE. slope through dense juniper.

8.60 Spur, projects SE.; thence along broken S. slope over series of small spurs and washes.

40.79 The $\frac{1}{4}$ sec. cor. of secs. 7 and 18, which is an "X" mkd. on a sandstone ledge and $\frac{1}{4}$ mkd. N. of cor. point.

Dependent Resurvey of the Subdivision of T. 2 N., R. 24 E.

CHAINS

There is no remaining evidence of the original bearing trees.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., on the exact cor. point, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T2N R24E

$\frac{1}{4}$ $\frac{S7}{S18}$
1963

N. $85^{\circ}48'$ W., beginning new measurement.

Over mountainous land through dense pinon and juniper; asc. 45 ft. over SE. slope.

- 2.00 Ridge, bears N. and S.; thence by triangulation; desc. gradually over broken S. slope.
- 20.00 Point of spur, projects S. 80° W.; desc. 240 ft. over top of spur; end of triangulation.
- 28.00 Ravine, drains SW.; asc. 280 ft. over SE. slope.
- 38.33 The cor. of secs. 7 and 18, on the W. bdy. of the Tp., previously described.

Land, mountainous.

Soil, rocky.

Timber, juniper and pinon.

Undergrowth, sagebrush and manzanita.

From the cor. of secs. 7, 8, 17 and 18, previously described.

N. $0^{\circ}48'$ W., bet. secs. 7 and 8.

Over mountainous land through dense juniper and pinon; by triangulation; asc. 240 ft. over SE. slope.

- 14.00 Spur, projects E.; desc. 120 ft. over NE. slope.
- 23.00 Canyon, drains SE.; asc. 130 ft. over SW. slope.
- 28.00 Spur, projects SE.; desc. 50 ft. over NE. slope.
- 31.50 Canyon, drains SE.; asc. over W. slope.
- 36.00 Same canyon, drains S., irregularly; thence along bottom of canyon; asc. 40 ft.
- 40.84 Point for the $\frac{1}{4}$ sec. cor. of secs. 7 and 8 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T2N R24E

$\frac{1}{4}$
S7|S8
1963

Dependent Resurvey of the Subdivision of T. 2 N., R. 26 E.

CHAINS

7312113

	Continue by triangulation; asc. 120 ft. along bottom of canyon.
51.00	Leave canyon; asc. 160 ft. over SW. slope.
62.00	Spur, projects W.; desc. 40 ft. over NW. slope.
69.00	Same canyon, drains SW.; asc. 250 ft. over SE. slope.
81.68	The cor. of secs. 5, 6, 7 and 8, monumented with a quartzite stone, 10x8x6 ins., firmly set, mkd. and witnessed as described in the official record.
	From which the original bearing trees:
	<p>A juniper, 9 ins. diam., bears N. 64°35' W., 7 lks. dist., mkd. T2N R24E S6 BT.</p> <p>A juniper, 10 ins. diam., bears S. 70° E., 8 lks. dist., mkd. T2N R24E S8 BT.</p>
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 4 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.
	<p style="text-align: center;">T2N · R24E $\frac{S6 S5}{S7 S8}$ 1963</p>
	Deposit the original stone alongside the iron post.
	Land, mountainous. Soil, rocky. Timber, juniper and pinon. Undergrowth, sagebrush and manzanita.
	From the cor. of secs. 4, 5, 8 and 9, previously described.
	S. 89°44' W., bet. secs. 5 and 8.
	Over mountainous land through dense juniper and pinon; by triangulation; asc. 130 ft. over SE. slope.
7.50	Spur, projects S.; desc. 80 ft. over SW. slope.
14.00	Draw, drains S.; asc. 330 ft. over SE. slope.
36.00	Spur, projects SE.; asc. 120 ft. over SW. slope.
39.71	The ¼ sec. cor. of secs. 5 and 8, which is an "X" mkd. on a stationary sandstone, 4x3x3 ft. and ¼ mkd. on N. side.
	From which the original bearing tree:
	A juniper, 15 ins. diam., bears N. 14°15' W., 33 lks. dist., mkd. ¼ S5 BT.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., in a mound of stone, 4 ft. base to top, with brass cap mkd.

Dependent Resurvey of the Subdivision of T. 2 N., R. 24 E.

CRACKS

T2N R24E

 $\frac{1}{2}$ $\frac{S5}{S8}$

1963

N. 89°21' W., beginning new measurement.

Asc. 80 ft. over SW. slope.

- 5.50 Ravine, drains SE.; 500 ft. over E. slope. (Ascending)
- 24.00 Ridge, bears N. and S.; desc. 200 ft. over W. slope.
- 33.00 Ravine, drains SW.; asc. 40 ft. over S. slope, changing to SE. slope.
- 43.04 The cor. of secs. 5, 6, 7 and 8, previously described.

Land, mountainous.

Soil, rocky.

Timber, juniper and pinon.

Undergrowth, sagebrush and manzanita.

N. 85°13' W., bet. secs. 6 and 7.

Over mountainous land through dense juniper and pinon; by triangulation; asc. 160 ft. over SE. slope.

- 13.00 Spur, projects S.; desc. 120 ft. over SW. slope.
- 18.00 Draw, drains S.; asc. 80 ft. over E. slope.
- 22.00 Spur, projects S.; desc. 100 ft. over SW. slope.
- 25.00 Ravine, drains S. 30° E.; asc. 220 ft. over E. slope.
- 32.50 Spur, projects S.; desc. 80 ft. over SW. slope.
- 39.73 The $\frac{1}{2}$ sec. cor. of secs. 6 and 7, monumented with a sandstone, 18x15x10 ins., firmly set, mkd. and witnessed as described in the official record.

From which the original bearing trees:

A pine, 10 ins. diam., bears S. 45°15' W., 35 lks. dist., mkd. $\frac{1}{2}$ S7 BT.

A juniper, 9 ins. diam., bears N. 28° W., 60 lks. dist., mkd. $\frac{1}{2}$ S6 BT.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 7 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T2N R24E

 $\frac{1}{2}$ $\frac{S6}{S7}$

1963

Deposit the original stone alongside the iron post.

S. 89°40' W., beginning new measurement.

Continue by triangulation; asc. 280 ft. over broken SE. slope.

- 38.46 End of triangulation.

The cor. of secs. 6 and 7, on the W. bdy. of the Tp., previously described.

Land, mountainous.

Soil, rocky.

Timber, juniper and pinon.

Undergrowth, sagebrush and manzanita.

Dependent Resurvey of the Subdivision of T. 2 N., R. 24 E.

CHAINS	
	From the cor. of secs. 5, 6, 7 and 8, previously described.
	N. 0°09' E., bet. secs. 5 and 6.
28.40	Over mountainous land through dense pinon and juniper; asc. 520 ft. over SE. slope, changing to S. slope.
	Top of Goslin Mountain, bears E. and W.; thence by triangulation.
41.19	Desc. 640 ft. over NE. slope.
	Point for the 1/4 sec. cor. of secs. 5 and 6 at proportionate dist.; there is no remaining evidence of the original cor.
	Set an iron post, 30 ins. long, 2 1/2 ins. diam., 20 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.
	T2N R24E 1/4 S6 S5 1963
	Desc. 680 ft. over NE. slope.
74.50	Bottom of desc.; asc. gradually along bottom of Red Creek Canyon.
80.60	Red Creek, dry at this point; wash, 1 ft. deep, 1.00 ch. wide, drains SE., irregularly.
82.62	True point for the cor. of secs. 5, 6, 31 and 32, on the N. bdy. of the Tp.
	From this point, the witness cor. for secs. 5, 6, 31 and 32, bears N. 89°20' W.; 1.00 ch. dist., and is monumented with an iron post, 2 1/2 ins. diam., set, mkd. and witnessed as described in the official record.
	Land, mountainous.
	Soil, rocky.
	Timber, juniper and pinon.
	Undergrowth, sagebrush and manzanita.
Island in Sec. 23, T. 2 N., R. 24 E.	
<p>Note: A report by Fred R. Chappell, Cadastral Engineer, dated Jan. 30, 1963, indicates the small island in sec. 23 to have been in existence on Jan. 4, 1896, when Utah was admitted to the Union. The island is mentioned in the field notes of the original survey of the township executed in 1898. It also appears on U.S.G.S. Green River survey sheet "G" surveyed in 1914, 1918 and 1922. The island is land in place, lying above mean high water level of Green River and is overgrown with timber and undergrowth, apparently identical in age and appearance with the timber and undergrowth found on both opposite banks of the river.</p> <p>In order to survey the small island in sec. 23, T. 2 N., R. 24 E., I begin at the cor. of secs. 13, 14, 23 and 24, which is monumented with an iron post, hereinbefore described.</p>	
	S. 46°10' W. on a connecting line.
14.00	Left bank of Green River, course E.; thence along river bottom.

Island in Sec. 23, T. 2 N., R. 24 E.

GRAB

19.50

Present water level on right side of river; at this time, the water line is extremely low due to the filling of the Flaming Gorge Reservoir.

23.44

The NE. bank of the island at ordinary high water elevation.

Point for the auxiliary meander cor. in sec. 23.

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

AMC
T2N R24E
S23
1963

From which

A cottonwood, 10 ins. diam., bears S. 14° E., 48 lks. dist., mkd. AMC S23 BT.

Thence with the meanders of the island.

Along a low, well-defined and rocky bank.

N. 78°45' W., 3.25 chs.

N. 85°00' W., 5.59 chs.

S. 67°30' W., 5.80 chs.

S. 44°00' W., 3.92 chs.

S. 75°30' E., 4.92 chs.

S. 83°45' E., 7.51 chs.

N. 49°30' E., 7.52 chs.

N. 45°38' W., 1.55 chs. The auxiliary meander cor.

Land, level.

Soil, sandy and gravelly.

Timber, scattering cottonwood and juniper.

Undergrowth, sagebrush, willow and rabbit brush.

Present River Meander Through
A Portion of T. 2 N., R. 24 E.

Present Meanders, Left Bank, Green River

Beginning at the meander cor. of secs. 13 and 18 on the left bank of the Green River on the W. bdy. of the Tp., shown S. 2°35' E., 17.97 chs. from W. ¼ sec. cor. of sec. 18, in the present notes of the resurvey of the W. bdy. of T. 2 N., R. 24 E.

Thence with meanders of the present left bank of the Green River through sec. 18, in a steep and rocky canyon.

S. 72°53' E., 7.74 chs.

N. 83°09' E., 6.04 chs.

S. 75°59' E., 19.97 chs.

S. 42°24' E., 7.00 chs.

Present River Meander through a Portion of T. 2 N., R. 24 E.

CHAINS

S. $54^{\circ}20'$ E., 3.62 chs. at 2.95 chs. mouth of Red Creek
15 lks. wide, 3 ins. deep.

S. $20^{\circ}32'$ E., 11.62 chs. to point for meander cor. of
secs. 18 and 19 at 33.14 chs.
on $E\frac{1}{2}$ of line between secs.
18 and 19.

Note: The present meander line of the left bank of the
Green River through secs. 19, 20, 21 and 28 follows very
closely along the position of the meander line of 1898
and is not in need of remeandering at the present time.

From the point for the meander cor. of secs. 21 and 22
on the left bank of Green River, hereinbefore described.

Thence with meanders of the present left bank of the
Green River, through sec. 22.

N. $58^{\circ}11'$ E., 9.30 chs.

N. $53^{\circ}58'$ E., 8.53 chs.

N. $69^{\circ}09'$ E., 7.81 chs.

N. $75^{\circ}06'$ E., 12.83 chs.

N. $89^{\circ}21'$ E., 8.74 chs.

N. $70^{\circ}49'$ E., 7.31 chs.

N. $56^{\circ}36'$ E., 13.44 chs.

N. $69^{\circ}44'$ E., 9.53 chs.

S. $73^{\circ}36'$ E., 11.40 chs. The present meander cor. of
secs. 22 and 23 at 5.31 chs.
in 3d leg of field notes of
line between secs. 22 and 23.

Thence with meanders of the present left bank of the
Green River through sec. 23.

S. $88^{\circ}12'$ E., 3.51 chs.

N. $53^{\circ}39'$ E., 5.74 chs.

N. $20^{\circ}50'$ E., 3.94 chs.

N. $18^{\circ}15'$ W., 1.94 chs.

N. $31^{\circ}23'$ E., 4.53 chs.

N. $87^{\circ}08'$ E., 6.20 chs.

N. $67^{\circ}05'$ E., 5.70 chs.

S. $87^{\circ}36'$ E., 11.74 chs.

N. $84^{\circ}11'$ E., 7.01 chs.

N. $80^{\circ}36'$ E., 3.00 chs.

N. $43^{\circ}54'$ E., 5.13 chs.

East, 8.50 chs.

S. $88^{\circ}45'$ E., 9.90 chs.

Present River Meander through a Portion of T. 2 N., R. 24 E.

CHAINS

S. 71°30' E., 14.97 chs. to the point for the meander cor. of secs. 23 and 24 at 9.13 chs. in 3d. leg of field notes of line between secs. 23 and 24.

Note: The present meander line of the left bank of the Green River through a portion of sec. 13 and a portion of the NW¼ and NE¼ of sec. 24 follows very closely along the position of the meander line of 1898 and is not in need of remeandering at the present time.

From the point selected for the witness meander cor. of sec. 24 on the left bank of the Green River on the E. bdy. of the Township hereinbefore described.

Thence with meanders of the present left bank of the Green River through sec. 24.

S. 69°22' W., 1.65 chs.

S. 78°52' W., 5.11 chs.

S. 44°19' W., 6.57 chs.

S. 26°20' W., 3.29 chs.

S. 9°33' W., 3.37 chs.

S. 26°25' W., 5.37 chs.

S. 11°55' W., 14.75 chs.

S. 28°55' W., 8.07 chs.

S. 47°32' W., 11.82 chs.

S. 27°10' W., 3.83 chs. to the meander cor. of secs. 24 and 25 at 33.01 chs. on E½ of line between secs. 22 and 23.

Note: The present meander line of the left bank of the Green River through secs. 25 and 36 follows very closely along the position of the meander of 1898 and is not in need of remeandering at the present time.

Present Meanders, Right Bank, Green River

Beginning at the meander cor. of secs. 13 and 18 on the right bank of the Green River shown N. 2°24' W., 21.11 chs. from sec. cor. of secs. 18 and 19, in the present notes of the resurvey of the W. bdy. of T. 2 N., R. 24 E.

Thence with meanders of the present right bank of the Green River through sec. 18, in a steep and rocky canyon.

N. 88°08' E., 4.31 chs.

N. 85°14' E., 6.73 chs.

S. 68°08' E., 6.98 chs.

S. 86°08' E., 5.93 chs.

S. 61°52' E., 7.02 chs.

Present River Meander through a Portion of T. 2 N., R. 24 E.

CHAINS

S. 63°05' E., 2.32 chs.
 S. 49°27' E., 2.55 chs.
 S. 28°55' E., 1.63 chs.
 S. 20°20' E., 1.53 chs.
 S. 16°35' E., 6.55 chs.
 S. 15°45' E., 1.62 chs. to meander cor. of secs. 18 and 19 at 6.80 chs. in 2d leg of field notes of line between secs. 18 and 19.

Thence with meanders of the present right bank of the Green River through sec. 19.

S. 5°14' E., 13.15 chs.
 S. 10°10' E., 9.18 chs.
 S. 1°05' W., 3.16 chs.
 S. 21°53' W., 1.26 chs.
 S. 19°57' W., 7.03 chs.
 S. 26°29' W., 3.39 chs.
 S. 3°34' W., 2.90 chs.
 S. 34°31' E., 9.71 chs.
 S. 69°19' E., 5.24 chs.
 N. 86°53' E., 4.61 chs.
 N. 59°20' E., 3.00 chs.
 S. 76°31' E., 4.29 chs.
 S. 47°07' E., 13.55 chs.
 S. 70°25' E., 11.70 chs. to point for the meander cor. of secs. 19 and 20 at 17.42 chs. on $S\frac{1}{2}$ of line between secs. 19 and 20.

Thence with meanders of present right bank of the Green River through sec. 20.

S. 81°50' E., 5.40 chs.
 N. 87°52' E., 8.58 chs.
 S. 65°27' E., 26.36 chs.
 S. 80°00' E., 8.63 chs.
 S. 76°47' E., 9.18 chs.
 S. 64°32' E., 7.28 chs. to meander cor. of secs. 20 and 29 at 18.14 chs. on $E\frac{1}{2}$ of line between secs. 19 and 29.

Note: The present meander line of the right bank of the

Present River Meander through a Portion of T. 2 N., R. 24 E.

CHAINS

Green River through secs. 21, 28 and 29 follows very closely along the position of the meander line of 1898 and is not in need of remeandering at the present time.

From the meander cor. of secs. 21 and 22 on the right bank of the Green River hereinbefore described.

Thence with meanders of the present right bank of the Green River through sec. 22.

- N. 66°53' E., 13.15 chs.
- N. 33°19' E., 9.44 chs.
- S. 62°40' E., 5.94 chs.
- N. 57°07' E., 5.53 chs.
- N. 70°26' E., 3.82 chs.
- N. 84°36' E., 3.72 chs.
- S. 85°50' E., 7.02 chs.
- N. 77°25' E., 4.41 chs.
- N. 43°53' E., 5.61 chs.
- N. 54°47' E., 9.82 chs.
- N. 77°37' E., 4.85 chs.
- N. 65°01' E., 10.33 chs.
- S. 65°47' E., 9.68 chs. to the meander cor. of secs. 22 and 23 at 3.18 chs. on N½ of line between secs. 22 and 23.

Thence with meanders of the present right bank of the Green River through sec. 23.

- N. 88°32' E., 7.77 chs.
- N. 31°00' E., 13.03 chs.
- N. 66°14' E., 9.52 chs.
- N. 89°46' E., 12.58 chs.
- S. 78°44' E., 11.26 chs.
- N. 88°51' E., 13.91 chs.
- N. 62°53' E., 7.04 chs.
- S. 89°00' E., 5.14 chs.
- S. 57°13' E., 10.12 chs. to the meander cor. of secs. 23 and 24 at 14.12 chs. on N½ of line between secs. 23 and 24.

Thence with meanders of the present right bank of the Green River through sec. 24 coinciding with the adjusted original meander line.

Present River Meander through a Portion of T. 2 N., R. 24 E.

CHAINS

SPLA113

S. 79°46' E., 16.78 chs.

S. 87°15' E., 5.40 chs.

N. 85°30' E., 4.40 chs.

N. 68°34' E., 12.86 chs.

N. 38°02' E., 23.73 chs.

N. 42°45' E., 5.10 chs.

at 2.40 point of emergence from present meander line; original meander line bears N. 64°30' E. 1.80 chs.; thence continue along the river limiting boundary of accretion lands attaching to Federally-owned original lot 3, sec. 24.

N. 86°54' E., 2.21 chs.

S. 69°12' E., 5.83 chs.

at 0.62 chs. proportionate point for auxiliary meander cor. sec. 24, marking NE. terminal of dividing line between Federal and private accretion lands. This auxiliary meander cor. is not monumented. (Proportion is based on ratio of present meander length to original meander length between points of intersection of these two meander lines): From this point for auxiliary meander cor. the point for the special meander cor. on the original meander line of sec. 24 bears S. 3°40' E., 2.02 chs. dist. Thence continue along the river limiting boundary of accretion lands attaching to privately-owned lots 2 and 10, sec. 24.

S. 83°57' E., 11.29 chs.

S. 54°07' E., 3.12 chs.

S. 28°05' E., 2.02 chs.

to present position of the right bank of the Green River at 30.90 chs. on N $\frac{1}{2}$ of line between secs. 19 and 24 on the E. bdy. of T. 2 N., R. 24 E.

From the present position of the right bank of the Green River, N. 0°21' E., 16.30 chs. dist. from the $\frac{1}{4}$ cor. of secs. 19 and 24 on the E. bdy. of T. 2 N., R. 24 E.

Thence with meanders of the present right bank of the Green River through sec. 24.

S. 57°43' W., 2.70 chs.

S. 70°00' W., 5.99 chs.

S. 58°15' W., 3.61 chs.

S. 41°22' W., 3.46 chs.

S. 29°10' W., 10.18 chs.

to point of mergence of present meander with the original meander line; continue along

Present River Meander through a Portion of T. 2 N., R. 24 E.

CHAINS

present meander line coinciding with adjusted original meander

S. 29°10' W., 10.18 chs., line.

S. 24°15' W., 12.70 chs.

S. 3°45' W., 8.10 chs.

S. 21°00' W., 4.40 chs.

S. 52°45' W., 2.60 chs.

S. 43°00' W., 4.60 chs.

S. 45°15' W., 11.12 chs.

S. 19°00' W., 4.50 chs. to point for the meander cor. of secs. 24 and 25 at 6.45 chs. in 2d leg of field notes of line between secs. 24 and 25.

Thence with meanders of the present right bank of the Green River through sec. 25.

S. 19°53' E., 2.50 chs.

S. 25°38' E., 7.19 chs.

S. 40°20' E., 19.53 chs.

S. 44°08' E., 19.26 chs.

S. 66°10' E., 10.69 chs. at 3.54 chs. proportionate point for auxiliary meander cor. sec. 25, marking SE. terminal of dividing line between Federal and Private accretion lands. This auxiliary meander line is not monumented. From this point for the auxiliary meander cor. the point for the special meander cor. on E.-W. center line and on original meander line of sec. 25 bears S. 73°10' W., 3.04 chs. dist.

Thence continue along the river limiting boundary of accretion lands attaching to privately-owned lot 8, sec. 25. At 10.69, point for the witness meander cor. of secs. 25 and 30 at 38.33 chs. on $S\frac{1}{2}$ of line between secs. 25 and 30 on the E. bdy. of T. 2 N., R. 24 E.

Note: The present meander line of the right bank of the Green River through sec. 36 follows very closely along the position of the meander line of 1898 and is not in need of remeandering at the present time.

Adjusted Original River Meanders Through
A Portion of T. 2 N., R. 24 E.

Adjusted original meanders (of 1898), right bank of the Green River through sec. 24; beginning at meander cor. of secs. 23 and 24 on right bank of river.

Thence by calculation with the adjusted original meanders of the Green River through sec. 24, coinciding with

Adjusted Original River Meanders Through a Portion of T. 2 N., R. 24

CHAINS

present meander line, as hereinbefore described.

N. 79°46' E., 16.78 chs.

S. 87°15' E., 5.40 chs.

N. 85°30' E., 12.86 chs.

N. 38°02' E., 23.73 chs.

N. 42°45' E., 2.40 chs.

To point of emergence from present meander. Present meander line bears N. 42°45'E. 2.70 chs. along N. margin of accretion lands attaching to Federally-owned original lot 3, sec. 24.

N. 64°30' E., 1.80 chs.

S. 73°55' E., 9.31 chs.

at 3.26 chs. intersect unmonumented point for special meander cor. sec. 24. From this point the dividing partition line between Federal and privately-owned accretion lands bears N. 3°40' W., 2.02 chs. dist. to present meander line of Green River, thence along N., E. and S. margin of accretion lands attaching to privately-owned original lot 2 and 10, sec. 24.

S. 80°49' E., 8.71 chs.

S. 49°30' E., 5.30 chs.

S. 5°00' W., 14.00 chs.

S. 69°15' W., 6.97 chs.

S. 61°30' W., 5.50 chs.

S. 24°15' W., 24.28 chs.

at 11.58 chs. point of emergence of original meander with present meander line; continue along adjusted original meander line coinciding with present meander line.

S. 3°45' W., 8.10 chs.

S. 21°00' W., 4.40 chs.

S. 52°45' W., 2.60 chs.

S. 43°00' W., 4.60 chs.

S. 45°15' W., 11.12 chs.

S. 19°00' W., 4.50 chs.

to point for the meander cor. of secs. 24 and 25 at 6.45 chs. in 2d leg of field notes of line between secs. 24 and 25.

Thence by calculation with the adjusted original meanders of the Green River through sec. 25.

S. 11°30' E., 2.50 chs.

Adjusted Original River Meanders Through a Portion of T. 2 N., R. 24 E.

CHAINS

- S. 21⁰00' E., 4.20 chs.
- S. 31⁰58' E., 7.50 chs.
- S. 39⁰27' E., 12.78 chs.
- S. 46⁰25' E., 8.53 chs.
- S. 41⁰26' E., 9.43 chs.
- S. 43⁰00' E., 3.50 chs.
- S. 47⁰30' E., 3.40 chs. at 2.13 chs. intersect unmonumented point for special meander cor. on E.-W. center line of sec. 25. From this point, the dividing partition line between Federal and privately-owned accretion lands bears N. 73⁰10' E., 3.04 chs. dist. to present meander line of Green River, thence along SW. margin of accretion lands attaching to privately-owned lot 8, sec. 25.
- S. 62⁰32' E., 7.42 chs.
- S. 72⁰30' E., 1.90 chs. to point for the meander cor. of secs. 25 and 30 at 35.79 chs. on S $\frac{1}{2}$ of line between secs. 25 and 30 on the E. bdy. of T. 2 N., R. 24 E.

General Description

The land within Township 2 North, Range 24 East ranges from mountainous in the extreme southern part of the township, the north 2 tiers of the township and the west 2 tiers of the township, to bench land above the Green River, and bottom land along the Green River in the E. $\frac{1}{2}$ of the township. The elevation of the township ranges from about 8300 ft. above sea level on the peaks in sec. 32 to about 5400 ft. above sea level at the point where the Green River leaves the township on the East boundary of sec. 36. The Green River enters the township in the S. $\frac{1}{2}$ mile on the West boundary of sec. 18, and flows in a general easterly direction across the township to the NE. cor. of sec. 24, thence S., irregularly along the East boundary of the township, and leaves through the middle of the East boundary of sec. 36. All drainage is toward the Green River.

The soil in the higher regions is principally rocky and gravelly with numerous ledges and outcroppings. These regions are covered with a dense growth of pinon and juniper; there is also some pine on the West boundary and along the Green River in the west $\frac{1}{2}$ of the township. The soil on the bench land is a sandy clay and is covered with a scattering to dense growth of juniper and a medium to heavy growth of sagebrush and shadscale. There is some aspen in the bottoms of the canyons south of the river.

There is considerable farm activity on the bottom land along the Green River. The area in secs. 23, 24, 25 and 26, known as Taylor Flats, shows a considerable

Township 2 North, Range 24 East

CHAINS

amount of development and is being subdivided into small tracts.

Main access to the area is by an improved dirt road that leads from Brown's Park to Clay Basin on the East boundary of the township and a graded dirt road that begins in the SE. cor. of sec. 13 and ends in the NE. cor. of sec. 8; this was the old Rock Springs road. There are numerous dirt trail roads providing access to much of the area.

There are several intermittent streams in the township. Red Creek, in the NW. cor. of the township shows no sign of water except during the run-off. Tolliver's Creek enters through the South boundary of sec. 33 and is fed by numerous springs, but the water disappears before it reaches the lower extremes of Tolliver's Canyon. Sears Creek enters through the South boundary of sec. 36 and flows NE. to the Green River.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS

NAMES	CAPACITY
Gerald W. Hochstrasser	Transitman, Crew Chief
Rex J. Edwards	Transitman, Crew Chief
Paul E. Mahler	Notes
Phylip J. Leslie	Notes
Jerry L. Thomas	Chainman
Max Asay	Chainman
Robert L. Gleave	Flagman
James H. Handy	Flagman
Ray S. Muniz	Cornerman
Howard W. Lewis	Cornerman

CERTIFICATE OF SURVEY

I, Fred R. Chappell, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 25th day of May, 1962,

I have dependently resurveyed the East, South and West boundaries and a portion of the meanders of the Green River, and the subdivisional lines of Township 2 North, Range 24 East, and surveyed the island in section 23 of Township 2 North, Range 24 East

of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

July 9, 1965 (Date)

Fred R. Chappell (Cadastral Surveyor)

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

SUBMITTED FOR APPROVAL Date AUG 6 1965

BUREAU OF LAND MANAGEMENT, Washington, D. C.

The foregoing field notes of the dependent resurvey of the East, West and South boundaries and a portion of the meanders of the Green River and the subdivisional lines of Township 2 North, Range 24 East, and the survey of the island in section 23, Township 2 North, Range 24 East,

executed by Fred R. Chappell, Supervisory Cadastral Surveyor having been critically examined and found correct, are hereby approved.

DEC 22 1965 (Date)

E. J. Livingston (Chief, Division of Engineering)

CERTIFICATE OF TRANSCRIPT

I CERTIFY That the foregoing transcript of the field notes of the above-described surveys in, is a true copy of the original field notes.

(Date)

(Chief, Division of Engineering)

Blank

Page

Blank

Page

FIELD NOTES

OF THE

RETRACEMENT

OF

THE UTAH, COLORADO STATE LINE, FROM MILE CORNER 261 TO THE NE. CORNER OF UTAH

Of the SALT LAKE Meridian,

In the State of UTAH

EXECUTED BY

FRED R. CHAPPELL

CADASTRAL SURVEYOR

Under special instructions dated MAY 25, 19 62, which provided for the surveys included under Group Number 456, approved JUNE 8, 1962, and assignment instructions dated MAY 3, 19 63.

Survey commenced MAY 20, 19 63

Survey completed SEPTEMBER 24, 19 63

Retracement of the Utah Colorado State Line
from Mile Cor. 261 to the NE. cor. of Utah

CREADW

The Utah Colorado State Line, from mile cor. 261 to the NE. cor. of Utah, was surveyed by Rollin J. Reeves in 1879. In 1898 Adolph Jessen retraced this line, in connection with the survey of Tps. 1, 2 and 3 N., R. 25 E., Utah. In 1909, R. Clark retraced between mile cor. 264 and 267, and between mile cors. 272 and 273, in connection with surveys in Colorado. In 1912 R. Clark retraced between mile cors. 267 and 269, in connection with surveys in Colorado. In 1937, Tom Crawford retraced between mile cors. 261 and 264 in connection with surveys in Colorado. In 1937, E. Eslinger retraced between mile cors. 269 and 273 in connection with surveys in Colorado.

The following field notes are those of the retracement with remonumentation of mile cors. found from mile cor. 261 to the NE. cor. of Utah, along the East boundary of Tps. 1, 2, and 3 N., R. 25 E., Utah, in connection with the dependent resurvey of those townships.

The retracement and remonumentation was executed with a W. and L. E. Gurley transit serial No. 580538. It is equipped with a full vertical circle and improved Smith-type solar attachment, and conforms to the standard instrumental specifications of the Bureau of Land Management. The instrument was maintained in precise adjustment throughout the progress of this retracement.

The direction of the lines of the retracement were determined by the solar transit method.

Measurements were made with a narrow steel tape, 8 chains in length, graduated every tenth link for the first link, every link for the next 99 links, and the remainder at intervals of 10 links. The tape was tested by comparison with a one chain standard steel tape and found to be correct. All measurements were made on the slope and the vertical angle of each interval ascertained by a clinometer in good adjustment. The horizontal equivalents alone are entered in the field note record. The length of all lines were determined by chaining where possible, otherwise by traverses and triangulation. The details of such traverses or triangulations have been thoroughly checked and verified and in order to simplify the record, the diagrams and reductions are omitted from these field notes.

The geographic position for mile cor. 261 is at Latitude $40^{\circ}46'03.42''$ N., and Longitude $109^{\circ}02'52.81''$ W., as computed from mile cor. ties to the NE. cor. of Utah, which is common to U.S. C. & G. S. triangulation station "UCOLWY", at Latitude $41^{\circ}00'02.616''$ N. and Longitude $109^{\circ}02'57.633''$ W.

The magnetic declination was read at a number of stations and the average of the several readings was found to be N. $16^{\circ}30'$ E.

Retracement and Remonumentation of mile cors. found of the survey executed by Rollin J. Reeves, in 1879, and retraced by Adolph Jessen, in 1898.

The 261 mile cor. on the Utah and Colorado State Line, which is monumented with a sandstone, 2x8x16 ins., firmly set in the ground and mkd. COL. on the E. face, UT. on the W. face, and 261 M. on the S. face.

Retracement of the Utah Colorado State Line
from Mile Cor. 261 to the NE. cor. of Utah

CHAINS

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd.

261M
U|C
T|O
A|L
H|O
1963

Deposit the original cor. alongside the iron post.

N. 0°26' E., along the 262 mile.

Over nearly level canyon bottom, through medium dense undergrowth.

20.37 The standard closing cor. Tps. 1 N. and 1 S., R. 25 E., secs. 1 and 35, monumented with an iron post, 2½ ins. diam., as described in the 1963 field notes of the resurvey of T. 1 N., R. 25 E.

Thence along the E. bdy. of T. 1 N., R. 25 E.

Asc. 460 ft. over a S. slope, by triangulation; through dense timber, along the E. side of a 4-strand barb wire fence.

48.60 Spur, projects W.; desc. 350 ft. by triangulation over a NW. slope.

60.45 Point for the E. ¼ sec. cor. of sec. 35, at midpoint bet. closing cors.; cor. point not monumented; desc. 100 ft. by triangulation over a NW. slope.

66.00 Leave dense timber, enter canyon bottom, by chaining; desc. 90 ft. over a NW. slope.

80.84 The 262 mile cor. monumented with a sandstone, 3x18x22 ins. firmly set in the ground, and mkd. COL on the E. face, UT on the W. face, and 262M on the S. edge.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground, to solid rock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

262M
U|C
T|O
A|L
H|O
1963

Deposit the original cor. alongside the iron post.

Land, mountainous.

Soil, rocky clay loam.

Timber, medium dense juniper and pinon.

Undergrowth, medium dense sagebrush and grass.

N. 0°37' E., along the 263 mile.

Over nearly level canyon bottom land, through scattered timber and medium dense undergrowth.

Retracement of the Utah Colorado State Line
from Mile Cor. 261 to the NE. cor. of Utah

CHAIN

- 1.50 Bottom of canyon drains SW.; asc. 60 ft. over a S. slope.
- 14.00 Enter dense timber; asc. 30 ft. over a S. slope.
- 19.69 The closing cor. of secs. 26 and 35, T. 1 N., R. 25 E., monumented with an iron post, 2½ ins. diam., as described in the 1963 field notes of the resurvey of T. 1 N., R. 25 E.
Asc. 300 ft. by triangulation, over a S. slope.
- 29.90 Spur ridge, projects S. 70° W.; desc. 480 ft. by triangulation over NW. slope.
- 52.00 Leave dense timber, end triangulation.
- 54.50 Bottom of canyon drains S. 80° W.; asc. 20 ft. over S. slope.
- 59.83 Point for the E. ¼ sec. cor. of sec. 26, at midpoint bet. closing cors.; cor. point not monumented.
- 60.00 Enter dense timber; asc. 340 ft., by triangulation, over S. slope.
- 79.35 Point for the 263 mile cor. at proportionate bearing and distance. This proportion is based on the A. Jessen 1898 retracement. There is no remaining evidence of the original cor.
Set an unmarked cedar post, 6 ft. long, 4 ins. diam., on solid rock, and in a mound of stone, 6 ft. base, 4 ft. high.
Land, broken, mountainous.
Soil, rocky clay.
Timber, medium dense juniper and pinon.
Undergrowth, scattered patches of sagebrush and grass.
-
- N. 0°17' W., along the 264 mile.
Over mountainous land, through dense timber and scattered undergrowth; asc. 30 ft. by chaining, over S. slope.
- 5.40 Top of ridge, bears E. and W.; desc. 60 ft. along NE. slope.
- 20.61 The closing cor. of secs. 23 and 26, T. 1 N., R. 25 E., monumented with an iron post, 2½ ins. diam., as described in the 1963 field notes of the resurvey of T. 1 N., R. 25 E.
Desc. 920 ft. by triangulation over a broken N. slope.
- 60.25 Point for the E. ¼ sec. cor. of sec. 23, at midpoint bet. closing cors.; cor. point not monumented.
Desc. 490 ft. over a broken N. slope.
- 75.00 Bottom of draw, drains E.; asc. 100 ft. over SE. slope.
- 79.85 True point for the 264 mile cor. at proportionate dist.; cor. point not monumented.
Land, broken, mountainous.
Soil, rocky clay.
Timber, dense juniper and pinon.
Undergrowth, scattered patches of sagebrush and grass.

Retracement of the Utah Colorado State Line
from Mile Cor. 261 to the NE. cor. of Utah

CHAINS

N. 0°17' W., along the 265 mile.

Over mountainous land, through dense timber; asc. 440 ft. by triangulation over S. slope.

18.81 The witness 264 mile cor. monumented with a sandstone 3x12x18 ins., firmly set in the ground, and mkd. COL on the E. face, UT on the W. face and 264 M WC on the S. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to solid rock, and in a mound of stone 3 ft. base to top, with brass cap mkd.

264M

WC

U|C

T|O

A|L

H|O

1963

N. 0°20' W., beginning new measurement.

.80 Spur, projects E.

1.23 The closing cor. of secs. 14 and 23, T. 1 N., R. 25 E., monumented with an iron post, 2½ ins. diam., as described in the 1963 field notes of the resurvey of T. 1 N., R. 25 E.

Desc. 820 ft. by triangulation over a broken N. slope.

28.00 Bottom of canyon, drains N. 75° E.; asc. 90 ft. by triangulation over SE. slope.

41.67 Point for the E. ¼ sec. cor. of sec. 14 at midpoint bet. closing cors.; cor. point not monumented.

Asc. 355 ft. by triangulation over SE. slope.

61.10 Spur, projects E.; desc. 370 ft. by triangulation over NE. slope.

76.17 The witness closing cor. of secs. 11 and 14, T. 1 N., R. 25 E., monumented with an iron post, 2½ ins. diam., as described in the 1963 field notes of the resurvey of T. 1 N., R. 25 E.

82.12 True point for the closing cor. of secs. 11 and 14; cor. point not monumented.

Desc. 40 ft., by chaining, over a NE. slope.

83.85 True point for the 265 mile cor., at proportionate dist.; cor. point not monumented.

Land, broken, mountainous.

Soil, rocky clay with a considerable amount of exposed sandstone.

Timber, dense juniper and pinon, with patches of dense mahogany.

Undergrowth, scattered sagebrush, bitterbrush, and grass.

Retracement of the Utah Colorado State Line
from Mile Cor. 261 to the NE. cor. of Utah

N. 0°20' W., along the 266 mile.

Desc. 240 ft. by chaining, over a NE. slope.

14.64 Grouse Creek road, bladed dirt, bears irregularly E. and W.

15.53 The witness 265 mile cor. monumented with a sandstone, 5x18x20 ins., firmly set in the ground, and mkd. COL on the E. face, UT on the W. face and 265 M WC on the S. face.

At the cor. point,

Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground to solid rock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

265M
WC
U | C
T | O
A | L
H | O
1963

N. 0°23' W., beginning new measurement.

Over nearly level river bottom land, through medium dense undergrowth.

2.02 Point for the meander cor. of sec. 11, at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.

M C
S11
T1N
R25E
1963

5.46 Present right bank of the Green River, course S. 80° E., bank is 2 to 6 ft. high, water at present low stage from 1 to 4 ft. deep.

14.90 Point for the meander cor. of sec. 11, at proportionate dist.; falls in the Green River.

21.45 Point selected for the witness meander cor. of sec. 11, on the left bank of the Green River.

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.

T1N | C
R25E | O
S11 | E
O
WMC
1963

Retracement of the Utah Colorado State Line
from Mile Cor. 261 to the SE. cor. of Utah

CHAINS

Deposit charcoal 6 ins. below the surface of
the ground, around the iron post.

22.80 Point for the E. 1/4 sec. cor. of sec. 11 at midpoint bet.
closing cors.; cor. point not monumented.

30.90 Leave dense undergrowth, enter meadow.

51.70 Leave meadow, enter sagebrush covered rolling land; asc.
40 ft. over a general S. slope.

62.87 The closing cor. of secs. 2 and 11, T. 1 N., R. 25 E.,
monumented with an iron post, 2 1/2 ins. diam., as de-
scribed in the 1963 field notes of the resurvey of T. 1 N.,
R. 25 E.

64.05 The 266 mile cor. monumented with a sandstone, 3x10x10
ins., firmly set in the ground, and in a mound of stone,
and mkd. COL on the E. face, UT on the W. face and 266M
on the S. edge.

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 12 ins. in
the ground to solid rock, and in a mound of stone, 3 ft.
base to top, with brass cap mkd.

266M
U|C
T|O
A|L
H|O
1963

Deposit the original cor. alongside the iron post.

Land, mountainous the first 1/4 mile, nearly level and
rolling the balance.
Soil, rocky clay the first 1/4 mile, sandy clay loam the
balance.
Timber, dense juniper and pinon the first 1/4 mile, none
the balance.
Undergrowth, medium dense sagebrush and grass, with dense
willows along the banks of the river.

N. 0°12' W., along the 267 mile.

Over rolling land, through scattered timber and medium
dense undergrowth; asc. 250 ft. over S. slope.

18.20 Wash, 25 lks. wide, 10 ft. deep, drains W.

21.50 Leave scattered timber, thence through medium dense under-
growth; asc. 105 ft. over S. slope.

34.70 Spur, projects W.; desc. 10 ft. over N. slope.

39.44 Point for the E. 1/4 sec. cor. of sec. 2 at midpoint bet.
closing cors.; cor. point not monumented.

Retracement of the Utah Colorado State Line
From Mile Cor. 261 to the NE. cor. of Utah

CHAINS

58.10 Unimproved dirt road, bears irregularly NE. and SW.; desc. 35 ft. over a gentle N. slope.

80.06 The 267 mile cor. and identical closing cor. of Tps. 1 and 2 N., R. 25 E., secs. 2 and 35, monumented with a sandstone 5x7x16 ins., firmly set in the ground, and mkd. with 6 grooves on the N. and S. face and 5 grooves and CC on the W. face, as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

267M
T2NU | C
R25ET | O
S35A | L
CC — SZH | O
T1N
1963

Deposit the original cor. alongside the iron post.

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of the cor.

Land, rolling bench.

Soil, gravelly clay.

Timber, scattered juniper the first ½ mile; no timber the balance.

Undergrowth, medium dense sagebrush, shadscale and grass.

N. 0°18' W., along the 268 mile and the E. bdy. of T. 2 N., R. 25 E.

Over nearly level bench land, through dense undergrowth.

1.10 Unimproved dirt road, bears NW. and SE.

18.10 Graded gravel road, Maybell Colorado to Clay Basin, bears E. and W.

21.42 Fall 2 lks. E. of a Colorado closing cor., monumented with a sandstone, 5x6x6 ins. above ground, and mkd. 10 on top, 6 grooves on the N. and S. faces and CC on the E. face.

21.87 Power line, bears N. 82°20' E., and S. 82°20' W.

34.40 Wash, 20 lks. wide, 3 ft. deep, drains SE.

40.26 Point for the E. ½ sec. cor. of sec. 35, at midpoint bet. closing cors.; cor. point not monumented.

45.50 Unimproved dirt road, bears irregularly NE. and SW.

53.90 Wash, 10 lks. wide, 2 ft. deep drains SE.

79.56 Fall, 19 lks. E. of a sandstone 3x10x16 ins. above ground, and mkd. SS 2 on the E. face and 04 on the W. face. This cor. not identified.

80.41 Point for the 268 mile cor. at proportionate distance; there is no remaining evidence of the original cor.

Retracement of the Utah Colorado State Line
From Mile Cor. 261 to the NE. cor. of Utah

CHAINS

Set an unmarked cedar post, 6 ft. long, 4 ins. diam., 24 ins. in the ground.

Land, gently rolling bench.

Soil, rocky, sandy clay.

No timber.

Undergrowth, medium dense sagebrush, shadscale and grass.

N. 0°18' W., along the 269 mile.

Over bench land, with a gentle S. slope, through medium dense undergrowth.

- .11 The closing cor. of secs. 26 and 35, T. 2 N., R. 25 E. monumented with an iron post, 2½ ins. diam., as described in the field notes of the 1963 resurvey of T. 2 N., R. 25 E.
- 4.80 Wash, 15 lks. wide, 2 ft. deep, drains SE.
- 21.04 Fall 7 lks. E. of the Colorado closing cor. of T. 11 N., R. 104 W., secs. 25 and 36, monumented with a sandstone 6x12x12 ins. above ground, and mkd. 04 on the top, CC on the E. face, 1 groove on the S. face and 5 grooves on the N. face.
- 28.60 Wash, 30 lks. wide, 6 ft. deep, drains SE.
- 40.26 Point for the E. ¼ sec. cor. of sec. 26, midpoint between closing cors.; cor. point not monumented.
- 43.80 Wash, 10 lks. wide, 2 ft. deep, drains SE.
- 54.90 Unimproved dirt road, bears SE. and NW.
- 69.50 Unimproved dirt road, bears SE. and W.
- 80.41 The 269 mile cor. and identical closing cor. of T. 2 N., R. 25 E., secs. 23 and 26, the mile cor. monumented with a sandstone, 4x10x14 ins. firmly set in the ground and mkd. COL on the E. face, UT on the W. face, and 269 M on the S. face; another sandstone 4x10x18 ins. set alongside mkd. with 4 notches on the N. edge, 2 notches on the S. edge and CC on the W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground to solid rock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

269M	
T2NU	C
R25ET	O
S23A	L
CC S26H	O
1963	

Deposit the original cors. alongside the iron post.

Land, nearly level bench.

Soil, rocky, sandy clay.

No timber.

Undergrowth, medium dense sagebrush, shadscale and grass.

Retracement of the Utah Colorado State Line
From Mile Cor. 261 to the NE. cor. of Utah

CHAINS

N. 0°31' W., along the 270 mile.

Over rolling bench land, through medium dense undergrowth;
asc. 40 ft. over S. slope.

20.67 Fall 4 lks. W. of a Colorado closing cor. monumented with
a sandstone, 5x8x12 ins. above ground, and mkd. 04 on top,
CC on the E. face, 2 grooves on the S, and 4 grooves on
the N. face, and witnessed with a mound of stone to E.

29.00 Enter dense timber.

32.70 Beaver Creek, a stream of clear water, 5 lks. wide, 4 ins.
deep, course SE., dense willows and cottonwood trees along
the creek; asc. 50 ft. along SW. slope.

40.37 Point for the E. $\frac{1}{2}$ sec. cor. of sec. 23 at midpoint bet.
closing cors.; cor. point not monumented.

Asc. 240 ft. by triangulation over a SW. slope.

80.75 The closing cor. of secs. 14 and 23, T. 2 N., R. 25 E.,
monumented with an iron post, 2 $\frac{1}{2}$ ins. diam., as described
in the field notes of the 1963 resurvey of T. 2 N., R. 25
E.

Asc. 25 ft. over a SW. slope.

82.10 The 270 mile cor. monumented with a 2 in. iron post, firmly
set in the ground, and in a mound of stone, with brass cap
mkd.

270MP

U | C
T | O
A | L
H | O
1937

Land, rolling bench the first $\frac{1}{2}$ mile, mountainous the
balance.

Soil, rocky, sandy clay.

Timber, none the first 29 chs., dense juniper the balance.

Undergrowth, medium dense sagebrush, medium grass, with
dense willows along the creek bottom.

N. 0°19' W., along the 271 mile.

Over mountainous land, through dense timber and scattered
undergrowth; asc. 400 ft. over SW. slope.

14.20 Rocky spur, projects W.; desc. 240 ft. along broken NW.
slope.

18.39 Fall 4 lks. W. of a Colorado closing cor. monumented with
an iron post, 2 ins. diam., firmly set in the ground and
in a mound of stone, with brass cap mkd.

T11N

U | R104W
T | S13
A | S24_{CC}
H |
1937

Retracement of the Utah Colorado State Line
From Mile Cor. 261 to the NE. cor. of Utah

CHAINS

- 39.08 Point for the E. $\frac{1}{4}$ sec. cor. of sec. 14, at midpoint bet. the closing cor. of secs. 14 and 23, and the true point for the closing cor. 11 and 14. Cor. point not monumented.
Desc. 160 ft. along NW. slope.
- 49.90 Beaver Creek, a stream of clear water, 5 lks. wide, 4 ins. deep, course S. 30° W.
- 50.79 The witness closing cor. of secs. 11 and 14, T. 2 N., R. 25 E., monumented with an iron post, 2 $\frac{1}{2}$ ins. in diam., as described in the field notes of the 1963 resurvey of T. 2 N., R. 25 E.
Asc. 600 ft. by triangulation over a badly broken SE. slope.
- 74.00 Ledy spur, projects SE., then by triangulation along a ledgy inaccessible E. slope.
- 79.51 True point for the closing cor. of secs. 11 and 14, T. 2 N., R. 25 E. Cor. point not monumented.
- 81.29 The 271 mile cor. monumented with an iron post 2 ins. diam., firmly set in the ground, and in a mound of stone, with brass cap mkd.

271M

U|C

T|O

A|L

H|O

1937

Land, badly broken mountains.

Soil, rocky clay, with a considerable amount of exposed sandstone.

Timber, dense juniper and pinon, with cottonwood along the creek bottom.

Undergrowth, scant sagebrush, bitterbrush and grass.

N. 0°27' W., along the 272 mile

Over badly broken mountains, through dense timber and scant undergrowth; asc. 1370 ft. by triangulation over a ledgy SE. slope.

- 38.17 Point for the E. $\frac{1}{4}$ sec. cor. of sec. 11 at midpoint bet. the true point for the closing cor. of secs. 11 and 14 and the closing cor. of secs. 2 and 11; cor. point not monumented.

Asc. 40 ft. over ledges facing S.

- 39.80 Rim, top of ledges, bears irregularly NE. and SW. thence over broken plateau, through medium timber and scattered patches of sagebrush. Desc. 165 ft. over a general N. slope.

- 61.00 Swale; asc. 210 ft. over a S. slope.

- 78.12 The closing cor. of secs. 2 and 11, T. 2 N., R. 25 E., monumented with an iron post, 2 $\frac{1}{2}$ ins. diam., as described in the 1963 field notes of the resurvey of T. 2 N., R. 25 E.

Retracement of the Utah Colorado State Line
From Mile Cor. 261 to the NE. cor. of Utah

CREAINS

81.90 The 272 mile cor. monumented with a sandstone, 3x10x24 ins., firmly set in the ground, and mkd. 272 UTAH on the W. face COLO on the E. face and witnessed by a mound of stone to E

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 5 ins. in the ground to solid rock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

272M
U|C
T|O
A|L
H|O
1963

Deposit the original cor. alongside the iron post.

Land, badly broken mountains the first ½ mile, rolling the balance.

Soil, rocky clay, with a considerable amount of exposed sandstone.

Timber, medium dense juniper and pinon, the first ½ mile; medium mahogany and pine the balance.

Undergrowth, scattered patches of dense sagebrush and grass.

N. 0°02' W., along the 273 mile.

Over rolling mountain top, through medium timber, and medium undergrowth; asc. 155 ft. along SW. slope.

36.11 Point for the E. ¼ sec. cor. of sec. 2 at proportionate distance; cor. point not monumented.

37.40 Top of rise; desc. 20 ft. over a N. slope.

58.30 Unimproved dirt road, bears NE. and SW.

66.70 Rut road, bears irregularly E. and W.; desc. 20 ft. over a N. slope.

76.41 The closing township cor. of Tps. 2 and 3 N., R. 25 E., secs. 2 and 35 monumented with an iron post, 2½ ins. diam., as described in the 1963 field notes of the resurvey of T. 3 N., R. 25 E.; thence along the E. bdy. of T. 3 N., R. 25 E.

79.26 The 273 mile cor. monumented with a sandstone, 3x12x14 ins., firmly set in the ground, and mkd. COL on the E. face, UT on the W. face and 273 M on the S. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

273M
U|C
T|O
A|L
H|O
1963

Deposit the original cor. alongside the iron post.

Retracement of the Utah Colorado State Line
From Mile Cor. 261 to the NE. cor. of Utah

CHAINS

Raise a mound of stone, 3 ft. base, 2 ft. high,
S. of the cor.

Land, rolling mountain top.
Soil, rocky clay loam.
Timber, patches of dense mahogany, pine, juniper and
pinon.
Undergrowth, medium sagebrush, bitterbrush and grass.

N. 0°16' W., along the 274 mile.

Over rolling land, through scattered patches of timber,
and medium undergrowth; desc. 25 ft. over gentle N. slope.

- 5.20 O-Wi-Kuts draw, drains N. 80° W.; asc. 85 ft. over SW.
slope.
- 15.38 Fall 3 lks. W. of a Colorado closing cor., monumented with
a sandstone, 8x10x14 ins. above ground, and mkd. 04 on
top, CC on the E. face, 6 grooves on the S. and 6 grooves
on the N. face. Witnessed by a mound of earth and stone
to E.

Asc. 45 ft. over a SW. slope.
- 34.40 Enter dense aspen and juniper timber.
- 36.65 Point for the E. $\frac{1}{2}$ sec. cor. of sec. 35 at midpoint bet.
closing cors.; cor. point not monumented; desc. 95 ft.
over N. slope.
- 50.50 Leave timber; desc. 15 ft. over N. slope.
- 55.70 O²Wi-Kuts Creek, dry, drains W.; asc. 140 ft. over S.
slope; enter timber.
- 76.16 The closing cor. of secs. 26 and 35, T. 3 N., R. 25 E.,
monumented with an iron post, 2 $\frac{1}{2}$ ins. diam., as described
in the field notes of the 1963 resurvey of T. 3 N., R. 25
E.
- 79.48 Point for the 274 mile cor. at proportionate distance.
There is no remaining evidence of the original cor.

Set an unmarked cedar post, 6 ft. long, 4 ins. diam.,
2 ft. in the ground, and in a mound of stone.

Land, rolling mountain top.
Soil, rocky clay loam.
Timber, scattered patches of dense aspen, mahogany,
juniper and pinon.
Undergrowth, medium dense sagebrush and grass, in the
timber openings.
- N. 0°16' W., along the 275 mile.
- Over rolling land, through dense timber and medium under-
growth.
- 1.50 Leave timber.
- 12.30 Unimproved dirt road, bears NW. and SE.; desc. 20 ft. over
a NE. slope.

Retracement of the Utah Colorado State Line
From Mile Cor. 261 to the NE. cor. of Utah

CHAINS

15.71 Fall 20 lks. E. of a Colorado closing cor., monumented with a sandstone, 8x12x16 ins. above ground, and mkd. 04 on the W. face, CC on the E. face, 1 groove on the S. and 5 grooves on the N. face.

Desc. 240 ft. over a broken NE. slope; enter timber.

36.41 Point for the E. 1/4 sec. cor. of sec. 26 at midpoint bet. closing cors.; cor. point not monumented; thence along E. slope.

44.00 Spur, projects NE.; desc. 490 ft. over a broken N. slope.

63.50 Draw, drains W.; asc. 90 ft. over a S. slope; leave timber

76.14 The closing cor. of secs. 23 and 26, T. 3 N., R. 25 E., monumented with an iron post, 2 1/2 ins. diam., as described in the field notes of the 1963 resurvey of T. 3 N., R. 25 E.

79.48 The 275 mile cor. monumented with a sandstone, 3x10x16 ins., firmly set in the ground and mkd. COL on the E. face, UT on the W. face and 275 M. on the S. face.

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, and in a collar of stone, with brass cap mkd.

275M
U | C
T | O
A | L
H | O
1963

Deposit the original cor. alongside the iron post.

Land, mountainous.

Soil, rocky clay loam.

Timber, patches of dense aspen, pine and juniper.

Undergrowth, dense sagebrush and grass in the openings.

N. 0°30' W., along the 276 mile.

Over mountainous land, through patches of dense timber and medium undergrowth; desc. 20 ft. over N. slope.

2.00 Grassy draw, drains S. 10° E.; asc. 130 ft. along E. side of draw, through aspen timber.

15.97 Fall 8 lks. W. of a Colorado closing cor. monumented with a sandstone, 6x10x16 inches above ground, and mkd. 04 on the W. face, CC on the E. face, 2 grooves on the S. and 4 grooves on the N. face.

Asc. 30 ft. over a SE. slope.

19.37 Leave timber; asc. 400 ft. over a SE. changing to S. slope

36.34 Point for the E. 1/4 sec. cor. of sec. 23, at midpoint bet. closing cors.; cor. point not monumented.

Asc. 170 ft. over a S. changing to SW. slope.

50.00 Spur, projects W.; desc. 260 ft. over a NW. slope.

Retracement of the Utah Colorado State Line
from Mile Cor. 261 to the NE. cor. of Utah

CHAINS

76.03

The closing cor. of secs. 14 and 23, T. 3 N., R. 25 E., monumented with an iron post, 2½ ins. diam., as described in the field notes of the 1963 resurvey of T. 3 N., R. 25 E.

Desc. 30 ft. over a NW. slope.

79.31

The 276 mile cor. monumented with a sandstone, 4x8x12 ins. firmly set in the ground, and mkd. COL on the E. face; UT on the W. face and 276 M on the S. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

276M
U|C
T|O
A|L
H|O
1963

Land, mountainous.
Soil, sandy clay loam.
Timber, scattered patches of aspen and pine.
Undergrowth, medium dense sagebrush and grass.

N. 0°39' W., along the 277 mile.

Over rolling mountain top, through medium dense undergrowth; desc. 75 ft. over a NW. slope.

16.44

Fall 35 lks. E. of a Colorado closing cor. monumented with sandstone, 5x5x12 ins. firmly set in the ground, and mkd. 04 on top, CC on the E. face and 3 grooves on the N. and S. faces; witnessed with a mound of stone to E.

Desc. 90 ft. over a gentle NW. slope.

28.50

Small stream of spring water, 1 lk. wide, 1 in. deep, drains SW. in bottom of draw; asc. 50 ft. over gentle S. slope.

37.30


Point for the E. ¼ sec. cor. of sec. 14 at proportionate dist.; cor. point not monumented.

38.20

Dirt road, bears irregularly E. and W.

60.87

The NE. cor. of Utah, monumented with a brass tablet set in a concrete block, 10x10x6 ins. above ground, tablet mkd.



This cor. is also USC&GS triangulation station "UCOLWY."

Land, rolling mountain top.
Soil, sandy clay loam.

Retracement of the Utah Colorado State Line
From Mile Cor. 261, to the NE. cor. of Utah

CHAINS

No timber.
Undergrowth, dense sagebrush and grass.

GENERAL DESCRIPTION

The land and soil along and around this retraced line varies considerably. The land from the 261 mile cor. to the WC 265 mile cor. is badly broken, steep and mountainous, and the soil is principally a shallow clay with numerous sandstone outcroppings and ledges covered with a dense growth of juniper, pinon, mahogany and some pine timber, with dense sagebrush and grass in the timber openings. The drainage is in a northerly direction into the Green River, which flows easterly 6 chs. N. of the WC. 265 mile cor. The land from the WC. 265 mile cor. to the 269 mile cor. is river bottom and bench land. The soil is sandy clay and gravelly clay, covered with a medium dense growth of sagebrush, shadscale and grass, with dense willows along the river. There is little or no timber. The land from the 269 mile cor. to the 272 mile cor. is steep, badly broken and mountainous. The soil is a shallow clay, with numerous sandstone outcroppings and ledges, covered with medium dense juniper and pinon timber with little or no undergrowth. The drainage is a southerly direction into the Green River. The land from the 272 mile cor. to the NE. cor. of Utah is mostly rolling mountain top and the soil is principally a sandy clay loam covered with patches of juniper, pinon, mahogany, pine and aspen timber. The timber-free land has a medium dense growth of sagebrush and a dense growth of grass. The drainage is in a southwesterly direction into the Green River.

all other... of... and...

CHAINS

CHAINS

Blank

Page

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS

NAMES	CAPACITY
Gerald W. Hochstrasser	Transitman, crew chief
Rex J. Edwards	Transitman, crew chief
Paul E. Mahler	Notes
Phylip J. Leslie	Notes
Jerry L. Thomas	Chainman
Max Asay	Chainman
Robert L. Gleave	Flagman
James H. Handy	Flagman
Ray S. Muniz	Cornerman
Howard W. Lewis	Cornerman

CERTIFICATE OF SURVEY

I, Fred R. Chappell, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 25th day of May, 19 62, I have made a retracement and remonumented mile corners found along the Utah-Colorado State line, from mile corner 261 to the NE. corner of Utah,

of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

March 2, 1964
(Date)

Fred R. Chappell
(Cadastral Surveyor)

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

SUBMITTED FOR APPROVAL

Date AUG 20 1964
AUG 27 1965

BUREAU OF LAND MANAGEMENT,
Washington, D. C.

The foregoing field notes of the retracement with remonumentation of mile corners found along the Utah-Colorado State line, from mile corner 261 to the NE. corner of Utah,

executed by Fred R. Chappell, Cadastral Surveyor, having been critically examined and found correct, are hereby approved.

DEC 22 1965
(Date)

E. J. Smith
(Chief, Division of Engineering)

CERTIFICATE OF TRANSCRIPT

I CERTIFY That the foregoing transcript of the field notes of the above-described surveys in _____, is a true copy of the original field notes.

(Date)

(Chief, Division of Engineering)

Blank

Page

Blank

Page

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD NOTES

OF THE

RETRACEMENT

OF

THE UTAH-WYOMING STATE LINE, FROM THE NE. COR. OF UTAH TO THE 267 MILE CORNER

Of the SALT LAKE Meridian,

In the State of UTAH

EXECUTED BY

FRED R. CHAPPELL CADASTRAL SURVEYOR

Under special instructions dated MAY 25, 19 62, which provided for the surveys
included under Group Number 456, approved JUNE 8, 1962,
and assignment instructions dated MAY 3, 19 63.

Survey commenced SEPTEMBER 25, 19 63

Survey completed OCTOBER 15, 19 63

1966 FEB 18 AM 11 21.9

RECEIVED
STATE & LAND OFFICE
SALT LAKE CITY, UTAH

INDEX DIAGRAM

Township 3 NORTH, Range 25 EAST

6	5	4	3	2	1
7 267M	8 266M	9 265M	10 264M	11 263M	12
4 18	4 17	3 16	2 15	1 14	13
19	20	21	22	23	24
29	28	27	26	25	24
31	30	29	28	27	26

Retracement of the Utah Wyoming State Line from the NE.
Corner of Utah to Mile Corner 267

CHAINS

The Utah Wyoming State Line, from the NE. cor. of Utah, to mile cor. 267, was surveyed by A. V. Richards in 1873. In 1898, A. Jessen retraced this line in connection with the survey of T. 3 N., R. 25 E., Utah. In 1910, Herman Jaeckel and Emil Voigt retraced it in connection with Wyoming surveys.

The following field notes are those of a retracement with remonumentation of mile cors. found from the NE. cor. of Utah to mile cor. 267, in connection with the dependent resurvey of T. 3 N., R. 25 E., Utah.

The retracement and remonumentation was executed with a W. and L. E. Gurley transit serial No. 591190. It is equipped with a full vertical circle and improved Smith-type solar attachment, and conforms to the standard instrumental specifications of the Bureau of Land Management. The instrument was maintained in precise adjustment throughout the progress of this retracement.

The direction of the lines of the retracement were determined by the solar transit method.


Measurements were made with a narrow steel tape, 8 chains in length, graduated every tenth link for the first link, every link for the next 99 links, and the remainder at intervals of 10 links. The tape was tested by comparison with a one chain standard steel tape and found to be correct. All measurements were made on the slope and the vertical angle of each interval ascertained by a clinometer in good adjustment. The horizontal equivalents alone are entered in the field note record. The length of all lines were determined by chaining.

The NE. cor. of Utah is common to U.S.C. & G.S. triangulation station "UCOLWY" and its geographic position is at latitude $41^{\circ}00'02.616''$ N., and longitude $109^{\circ}02'57.633''$ W.

The magnetic declination was read at a number of stations and the average of the several readings was found to be $N. 16^{\circ}45' E.$

Retracement and remonumentation of mile cors. found of the survey executed by A. V. Richards in 1873, and retraced by Adolph Jessen, in 1898.

The NE. cor. of Utah, monumented with a brass tablet set in a concrete block 10x10x6 ins. above ground, tablet mkd.



S. $89^{\circ}53' W.$, along the 263 mile.

Over rolling mountain top, through medium dense undergrowth; desc. 40 ft. over a NW. slope.

15.80

Wash, 40 lks. wide, 5 ft. deep, drains N.; asc. 80 ft. over a NE. slope.

Retracement of the Utah, Wyoming State Line.
from the NE. cor. of Utah to mile cor. 267

CHAINS

- 37.95 Point for the N. $\frac{1}{4}$ sec. cor. of sec. 14, at proportionate dist. between the NE. cor. of Utah, and the closing cor. of secs. 14 and 15; cor. point not monumented.
- 41.70 Unimproved dirt road, bears NE. and SW.; asc. 10 ft. over a NE. slope.
- 45.10 Enter aspen timber; asc. 70 ft. over a NE. slope.
- 51.42 Point for the 263 mile cor., at proportionate bearing and distance; this proportion is based on the A. Jessen 1898 retracement. There is no remaining evidence of the original cor.
- Set an unmarked cedar post, 6 ft. long, 6 ins. diam., 18 ins. in the ground, and in a mound of stone.
- Land, rolling mountain top.
Soil, rocky, clay, loam.
Timber, dense aspen the last 6.50 chs.
Undergrowth, medium dense sagebrush and grass.
-
- N. 89°50' W., along the 264 mile.
- Over mountainous land, through dense timber, and scattered undergrowth; asc. 15 ft. over a NE. slope.
- 2.50 Leave timber, enter small clearing.
- 4.40 Unimproved dirt road, bears NW. and SE., enter timber; asc. 20 ft. over a NE. slope.
- 7.60 Fall 17 lks. S. of a Wyoming closing cor., monumented with a sandstone, 5x7x10 ins. above ground, and mkd. CC on the N. face, and 6 grooves on the E. and W. edges.
- Asc. 40 ft. over a NE. slope.
- 10.00 Leave timber; asc. 25 ft. over a NE. slope.
- 14.60 Enter timber; asc. 30 ft. over a NE. slope.
- 22.10 Leave timber; asc. 10 ft. over a NE. slope.
- 26.68 The closing cor. of secs. 14 and 15, T. 3 N., R. 25 E., monumented with a iron post, 2 $\frac{1}{2}$ ins. in diam., as described in the 1963 field notes of the resurvey of T. 3 N., R. 25 E.
- Asc. 120 ft. along a N. slope.
- 65.84 Point for the N. $\frac{1}{4}$ sec. cor. of sec. 15, at midpoint bet. closing cors.; cor. point not monumented; continue along a N. slope.
- 71.20 Unimproved dirt road, bears NW. and SE.; continue along a N. slope.
- 75.20 Unimproved dirt road, bears N. and S.; continue along a N. slope.
- 79.79 Point for the 264 mile cor., at proportionate bearing and dist.; this proportion is based on the A. Jessen 1898 retracement. There is no remaining evidence of the original cor.

Retracement of the Utah Wyoming State Line
from the NE. cor. of Utah to mile cor. 267

CHAINS

Set an unmarked pine post, 6 ft. long, 6 ins. diam., 2 ft. in the ground, and in a mound of stone.

Land, rolling, mountainous.

Soil, rocky, clay loam.

Timber, patches of dense aspen, scattered pine.

Undergrowth, medium dense sagebrush and grass.

N. 89°37' W., along the 265 mile.

Over rolling mountainous land, through medium dense undergrowth; asc. 25 ft. along a N. slope.

2.20 Jeep road, bears N. and S.

6.20 Jeep road, bears N. and S., slope changes to W.

7.27 Fall 10 lks. S. of a Wyoming closing cor., monumented with a 1 inch iron post, firmly set in the ground, with brass cap mkd.

T12N R104W

S23|S24

C C

1910

Desc. 200 ft. over a W. slope.

25.21 The closing cor. of secs. 15 and 16, T. 3 N., R. 25 E., monumented with a iron post, 2½ ins. in diam., as described in the 1963 field notes of the resurvey of T. 3 N., R. 25 E.

Desc. 20 ft. over a W. slope.

29.90 Jeep road, bears N. and S.; desc. 125 ft. over a W. slope.

50.70 Jeep road, bears N. and S.; desc. 165 ft. over a W. slope.

65.22 Point for the N. ¼ sec. cor. of sec. 16, at midpoint bet. closing cors.; cor. point not monumented

78.75 The 265 mile cor. monumented with a pine post, 7 ft. long, 6 ins. square, set 2 ft. in the ground, and in a mound of earth and stone, and mkd., WYOMING on the S., UTAH on the E., and 265 M. on the W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

WYOMING

UTAH

265M

1963

Reset the original cor. alongside the iron post.

Land, mountainous.

Soil, rocky, clay loam.

No timber.

Undergrowth, medium short sagebrush and dense grass.

4

Retracement of the Utah, Wyoming State Line
from the NE. cor. of Utah to mile cor. 267

CHAINS

N. 89°18' W., along the 266 mile.

Over rolling mountainous land, through medium dense undergrowth; desc. 155 ft. over a W. slope.

- 8.54 Fall 3 lks. N. of a Wyoming closing cor., monumented with a 1 in. iron post, firmly set in the ground, with brass cap mkd.

$$\begin{array}{r} 225 \quad | \quad 628 \\ \quad \quad | \quad \quad \\ \hline \quad \quad | \quad \quad \\ \quad \quad | \quad \quad \\ \hline \quad \quad | \quad 190 \end{array}$$

Desc. 95 ft. over a W. slope.

- 16.40 Wash, 10 lks. wide, 2 ft. deep, drains SW.; desc. 110 ft. over a W. slope.

- 26.47 The closing cor. of secs. 16 and 17, T. 3 N., R. 25 E., monumented with a iron post, 2½ ins. diam., as described in the 1963 field notes of the resurvey of T. 3 N., R. 25 E.

Desc. 175 ft. over a W. slope.

- 37.70 Wash, 2 chs. wide, 20 ft. deep, drains S. 75° W.; desc. 190 ft. over a W. slope.

- 60.50 Wash, 40 lks. wide, 7 ft. deep, drains S.

- 60.90 Improved dirt road, bears N. and S.

- 61.80 Wash, 60 lks. wide, 8 ft. deep, drains S. 10° E.; asc. 10 ft. over a SE. slope.

- 66.53 Point for the N. ¼ sec. cor. of sec. 17, at midpoint bet. closing cors.; cor. point not monumented.

Asc. 45 ft. over a SE. slope.

- 74.20 Point for the 266 mile cor. at proportionate bearing and dist.; this proportion is based on the A. Jessen 1898 retracement. There is no remaining evidence of the original cor.

Set an unmarked cedar post, 6 ft. long, 5 ins. diam., 2½ ft. in the ground.

Land, mountainous.

Soil, rocky, clay loam.

No timber.

Undergrowth, medium dense sagebrush, grass and weeds.

S. 89°56' W., along the 267 mile.

Over mountainous land, through medium dense undergrowth.

- .30 Wash, 20 lks. wide, 4 ft. deep, drains S. 10° E.; asc. 135 ft. over an E. slope.

- 8.50 Top of rise; desc. 20 ft. over a W. slope.

- 11.20 Draw, drains S. 10° E.

- 14.00 Fall 16 lks. N. of a Wyoming Closing cor. monumented with a sandstone, 5x7x9 ins. above ground, and mkd. CC on the N. face, and with 3 notches on the E. and W. edges.

Retracement of the Utah Wyoming State Line
from the NE. cor. of Utah to mile cor. 267

CHAINS

Asc. 195 ft. over an E. slope.

- 32.39 The closing cor. of secs. 17 and 18, T. 3 N., R. 25 E., monumented with an iron post, 2½ ins. diam., as described in the 1963 field notes of the resurvey of T. 3 N., R. 25 E.

Asc. 600 ft. over an E. slope.

- 61.60 Ridge, bears N. and S. 20° E.; desc. 200 ft. over a W. slope.

- 72.58 Point for the N. ¼ sec. cor. of sec. 18, at midpoint bet. closing cors.; cor. point not monumented.

Desc. 80 ft. over a W. slope.

- 78.89 The 267 mile cor. monumented with an iron post, 2½ ins. diam., set, mkd. and witnessed as described in the official record.

Land, mountainous.

Soil, rocky, clay loam.

No timber.

Undergrowth, medium dense sagebrush, grass and weeds.

GENERAL DESCRIPTION

The land along and around this retraced line is rolling and mountainous. The soil is principally a rocky, clay loam, covered with a medium dense growth of sagebrush and dense grass. There are patches of dense aspen and scattered pine timber along the first 2 miles and little or no timber, the balance. The drainage for the first 2 miles is all in a northerly direction and the remainder is all in a southerly direction into the Green River, which flows easterly about 11 miles south. This line is accessible by a dirt road, Clay Basin to Rock Springs.

	CHADRS		REVISION
--	--------	--	----------

Blank

Page

CERTIFICATE OF SURVEY

I, FRED R. CHAPPELL, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 25th day of MAY, 19 62, I have supervised the retracement with remonumentation of mile corners found along the Utah-Wyoming State line, from the NE. corner of Utah to mile corner 267,

of the SALT LAKE Meridian, in the State of UTAH, which are represented in the foregoing field notes as having been executed ~~BY ME~~ and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

March 9, 1964 (Date)

Fred R. Chappell (Cadastral Surveyor)

Fred R. Chappell, Cadastral Surveyor

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

SUBMITTED FOR APPROVAL Date AUG 20 1964

BUREAU OF LAND MANAGEMENT, Washington, D. C.

The foregoing field notes of the retracement with remonumentation of mile corners found along the Utah-Wyoming State line, from the NE. corner of Utah to mile corner 267,

executed by Gerald W. Hochstrasser, Surveying Technician, under the supervision of Fred R. Chappell, Cadastral Surveyor, having been critically examined and found correct, are hereby approved.

DEC 22 1965 (Date)

E. L. Livingston (Chief, Division of Engineering)

CERTIFICATE OF TRANSCRIPT

I CERTIFY That the foregoing transcript of the field notes of the above-described surveys in is a true copy of the original field notes.

(Date)

(Chief, Division of Engineering)

Blank

Page

Blank

Page

FIELD NOTES

OF THE

DEPENDENT RESURVEY

OF

THE EAST BOUNDARY, THE SOUTH BOUNDARY

AND

THE SUBDIVISIONAL LINES

OF

TOWNSHIP 19 SOUTH, RANGE 25 EAST

Of the SALT LAKE Meridian,

In the State of UTAH

EXECUTED BY

GLEN B. HATCH CADASTRAL SURVEYOR

Under special instructions dated SEPTEMBER 21, 19 62, which provided for the surveys included under Group Number 459, approved OCTOBER 1, 1962, and assignment instructions dated AUGUST 14, 19 63.

Survey commenced SEPTEMBER 9, 19 63

Survey completed OCTOBER 18, 19 63

1966 MAR 4 AM 10 00 .0

RECEIVED
STATE & LAND OFFICE
SALT LAKE CITY, UTAH

INDEX DIAGRAM

Township 19 South, Range 25 East,

6 67	5 53	4 44	3 34	2 24	1 9
66	66	52	43	33	24
7 65	8 51	9 42	10 32	11 23	12 7
63	63	50	41	31	22
18 61	17 50	16 40	15 31	14 21	13 5
61	60	49	39	30	20
19 59	20 48	21 38	22 29	23 19	24 4
58	57	47	38	28	19
30 56	29 46	28 37	27 27	26 18	25 3
56	55	45	36	26	17
31 54	32 44	33 35	34 25	35 16	36 2
15	14	13	12	11	10

Township 19 South, Range 25 East

CHAINS

The West boundary was surveyed by A. D. Ferron in 1884, and was resurveyed by Frank E. Baxter in 1894, who also surveyed the East boundary, the South boundary, the North boundary, and the subdivisional lines. The West boundary was resurveyed by Charles F. Moore and Robert C. Yundt in 1931. The North boundary was resurveyed by George D. Voorhees et al, in 1960.

The following field notes are those of the dependent re-survey of the East boundary, the South boundary, and the subdivisional lines of Township 19 South, Range 25 East.

Before restoring the corners, the lines of the original survey were retraced, and diligent search made for any evidence of the original corners, bearing trees, and other calls of the original field note record.

The rules of proportionate measurement were applied to ascertain the position of the lost corners, but not until exhausting every reasonable possibility of finding direct evidence for the control of each particular corner.

The costs of the field and office work incurred in the execution of the resurveys herein described are payable from the current appropriation for "Management of Lands and Resources, Bureau of Land Management."

The resurveys were executed with a W. & L. E. Gurley Solar Transit No. 580518, constructed in accordance with the standard instrumental specifications of the Bureau of Land Management. The instrument was in good condition prior to the beginning of the resurvey and was maintained in proper adjustment throughout the progress of the resurvey.

Measurements herein contained were made with a narrow steel tape, 8 chains in length, graduated every link for the first 100 links and thereafter at intervals of 10 links. The tape was tested by comparison with a one chain standard steel tape and found to be correct. Measurements were made on the slope with the vertical angle of each interval ascertained with a clinometer in good adjustment; horizontal equivalents alone are entered in the field notes. All lines of this resurvey were run by direct method where the lines were accessible; lines inaccessible were run by traverse or triangulation methods. Distances to topography on lines run by traverse or triangulation are approximate. The details of such traverses or triangulations have been thoroughly checked and verified, and in order to simplify the record the diagrams and reductions are omitted from these field notes.

The direction of the lines of this resurvey were determined by reference to true meridians established on line by altitude observations on the sun. The lines were carried forward by sustained angulation being supplemented by other numerous altitude observations on the sun taken throughout the progress of the resurvey.

The geographic position for the southeast corner of the township is at latitude $39^{\circ} 06' 12.834''$ N. and longitude $109^{\circ} 05' 18.463''$ W. as adjusted from section line ties to U. S. C. & G. S. triangulation station "West", at latitude $39^{\circ} 06' 04.718''$ N. and longitude $109^{\circ} 06' 57.175''$ W., located S. $12^{\circ} 18' E.$, 12.65 chains distance from the $\frac{1}{4}$ section corner of sections 2 and 35, Townships 19 and 20 South, Range 25 East.

The magnetic declination was read at a number of stations throughout the township and the average of these readings was found to be $15^{\circ} 30'$ East.

Dependent Resurvey of the East Boundary, Township 19 South,
Range 25 East

CHAINS

Reestablishment of the Survey Executed by Frank E. Baxter in 1894, with the establishment of corners pertaining to Township 19 South, Range 26 East, at intervals of 40.00 and 80.00 chs. northing from the $\frac{1}{2}$ sec. cor. of secs. 19 and 24.

Beginning at the cor. of Tps. 19 and 20 S., Rs. 25 and 26 E., established at proportionate dist. bet. the $\frac{1}{2}$ sec. cor. of secs. 31 and 36, T. 19 S., Rs. 25 and 26 E. and the cor. of secs. 1, 6, 7 and 12, T. 20 S., Rs. 25 and 26 E., and the cor. of secs. 1, 2, 35 and 36, Ts. 19 and 20 S., R. 25 E. and the cor. of secs. 5, 6, 31 and 32, Ts. 19 and 20 S., R. 26 E. There is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground and in a collar of stone to top, with brass cap mkd.

T19S
R25E R26E
S36 | S31
S1 | S6
T20S
1963

N. $0^{\circ}06'$ W., bet. secs. 31 and 36

Over mountainous land through greasewood, shadscale, and sagebrush undergrowth.

- 4.00 Base of ledge, bears NE. and SW., asc. abruptly about 100 ft. over sandstone ledges facing SE.
- 7.60 Top of ledge, bears NE. and SW., asc. 140 ft. over steep S. slope.
- 16.35 Rim of mesa, bears E. and W., thence over rolling land.
- 32.20 Wash, 10 lks. wide, 2 ft. deep, drains W.
- 39.40 Wash, 10 lks. wide, 1 ft. deep, drains SW.
- 40.00 The $\frac{1}{2}$ sec. cor. of secs. 31 and 36, monumented with a sandstone, 14x12x3 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins. in the ground, and in a collar of stone to top, with brass cap mkd.

T19S
R25E R26E
 $\frac{1}{2}$
S36 | S31
1963

Bury original stone cor. alongside iron post.

North, beginning new measurement.

Over gently rolling land.

Dependent Resurvey of the East Boundary, T. 19 S., R. 25 E.

CHAINS

7.10 Rim of mesa, bears NW. and SE., desc. 125 ft. over NE. slope.

23.75 Wash, 15 lks. wide, 2 ft. deep, drains W., asc. 120 ft. over S. slope.

39.00 Spur, slopes W., desc. 20 ft. over N. slope.

40.09 The cor. of secs. 25, 30, 31, and 36, monumented with a sandstone, 20x10x6 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to bedrock, and in a mound of stone, 3½ ft. base to top, with brass cap mkd.

T19S
R25E R26E
S25 | S30
S36 | S31
1963

Bury original stone cor. alongside iron post.

Land, rolling, mountainous.
Soil, rocky clay sand.
No timber.
Undergrowth, greasewood, shadscale and sagebrush.

N. 0°04' W., bet. secs 25 and 30.

Over rolling desert land through widely scattered juniper timber with greasewood and shadscale undergrowth. Desc. 20 ft. over N. slope.

7.20 Small draw, drains SW., asc. 15 ft. over SE. slope.

8.80 Small spur, slopes W., desc. 10 ft. over NW. slope.

16.20 Wash, 15 lks. wide, 3 ft. deep, drains W., asc. 20 ft. over S. slope.

23.10 Spur, slopes W., desc. 25 ft. over N. slope.

31.30 Wash, 20 lks. wide, 8 ft. deep, drains W., asc. 20 ft. over SW. slope.

35.40 Spur, slopes W., desc. 40 ft. over NW. slope.

40.18 The ½ sec. cor. of secs. 25 and 30, monumented with a sandstone, 16x14x8 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground, and in a collar of stone to top, with brass cap mkd.

T19S
R25E R26E
S25 | S30
1963

Bury original stone cor. alongside iron post.

Dependent Resurvey of the East Boundary, T. 19 S., R. 25 E.

CHAINS	
	N. 0°10' E., beginning new measurement. Desc. 20 ft. over NW. slope.
2.60	Wash, 15 lks. wide, 1 ft. deep, drains W.
3.70	Road, unimproved, bears NE. and SW.
6.70	Wash, 10 lks. wide, 2 ft. deep, drains W., asc. 35 ft. over SE. slope.
7.70	Spur, slopes SW., desc. 30 ft. over NW. slope.
19.15	Wash, 15 lks. wide, 3 ft. deep, drains SW., asc. 35 ft. over SE. slope.
22.05	Spur, slopes SW., desc. 60 ft. over NW. slope.
35.85	Wash, 10 lks wide, 2 ft. deep, drains SW., asc. 10 ft. over SE. slope.
36.30	Spur, slopes SW., desc. 15 ft. over NW. slope.
40.17	The cor. of secs. 19, 24, 25 and 30, monumented with a sandstone, 20x12x3 ins., set, mkd. and witnessed as described in the official record. At the cor. point. Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd. T19S R25E R26E S24 S19 S25 S30 1963 Bury original stone cor. alongside iron post. Land, rolling desert. Soil, sandy clay, rocky. Timber, widely scattered juniper. Undergrowth, shadscale and greasewood.

	N. 0° 10' W., bet. secs. 19 and 24. Over rolling desert land through scattered juniper timber with shadscale and greasewood undergrowth.
2.30	Wash, 10 lks. wide, 2 ft. deep, drains SW.
8.70	Road, unimproved, bears irregularly E. and W.
17.70	Wash, 10 lks. wide, 2 ft. deep, drains SW.
27.40	Wash, 20 lks. wide, 6 ft. deep, drains SW.
30.30	Wash, 15 lks wide, 4 ft. deep, drains W.
39.60	Wash, 15 lks wide, 2 ft. deep, drains SW.
40.20	The ¼ sec. cor. of secs. 19 and 24, monumented with a sandstone, 16x12x2 ins., set, mkd. and witnessed as described in the official record.

Dependent Resurvey of the East Boundary, T. 19 S., R. 25 E.

CHAINS

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, and in a collar of stone to top, with brass cap mkd.

T19S
R25E R26E

S24 | S19
1963

Bury original stone cor. alongside iron post.

N. $0^{\circ}04'$ W., beginning new measurement.

Desc. 70 ft. over N. slope.

20.30 Wash, 15 lks. wide, 3 ft. deep, drains SW., asc. 185 ft. over S. slope.

32.40 Spur, slopes W., desc. 10 ft. over gentle N. slope.

40.00 Point for the cor. of secs. 18 and 19, T. 19 S., R. 26 E. at a point 40.00 chs. northing from the $\frac{1}{2}$ sec. cor. of 19 and 24.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground, and in a collar of stone to top, with brass cap mkd.

T19S
R25E R26E

S24 | S18
S19
1963

40.20 The cor. of secs. 13, 18, 19 and 24, monumented with a sandstone, 16x14x4 ins., set, mkd. and witnessed as described in the official record. This cor. will now function as the cor. of secs. 13 and 24, T. 19 S., R. 25 E. only.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 22 ins. in the ground, and in a collar of stone to top, with brass cap mkd.

T19S
R25E R26E

S13 | S18
S24
1963

Bury original stone cor. alongside iron post.

Land, rolling $\frac{1}{2}$ half mile; mountainous N. half mile.
Soil, sandy clay.
Timber, scattered juniper.
Undergrowth, shadscale and greasewood.

N. $0^{\circ}01'$ W., along the E. boundary of sec. 13.

Dependent Resurvey of the East Boundary, T. 19 S., R. 25 E.

CHAINS	Description
	Over mountainous land through scattered juniper timber with shadscale and greasewood undergrowth. Desc. 115 ft. over N. slope.
10.70	Wash, 10 lks. wide, 2 ft. deep, drains W., asc. 35 ft. over S. slope.
15.60	Small spur, slopes W., desc. 45 ft. over N. slope.
23.30	Wash, 15 lks. wide, 2 ft. deep, drains W., asc. 40 ft. over S. slope.
27.90	Ridge, bears E. and W., desc. 15 ft. over N. slope.
30.10	Wash, in draw, drains W., asc. 135 ft. over S. slope.
36.70	Point of ridge, bears E. and W., desc. 10 ft. over gentle N. slope.
39.80	Point for the $\frac{1}{4}$ sec. cor. of sec. 18, T. 19 S., R. 26 E., at 40.00 chs. northing from the cor. of secs. 18 and 19, T. 19 S., R. 26 E. Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 4 ins. in the ground to bedrock, and in a mound of stone, 5 ft. base to top, with brass cap mkd. <div style="text-align: center;"> T19S R25E R26E $\frac{1}{4}$ S18 1963 </div>
40.28	The $\frac{1}{4}$ sec. cor. of secs. 13 and 18, monumented with a sandstone, 16x14x4 ins., set, mkd. and witnessed as described in the official record. This cor. will now function as the $\frac{1}{4}$ sec. cor. of sec. 13, T. 19 S., R. 25 E. only. At the cor. point. Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 8 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd. <div style="text-align: center;"> T19S R25E R26E $\frac{1}{4}$ S13 1963 </div> Bury original stone cor. alongside iron post. <hr style="width: 20%; margin: 10px auto;"/> N. 0'02' W., beginning new measurement. Desc. 20 ft. over N. slope. Leave scattered timber.
1.90	Draw, drains W., asc. 65 ft. over S. slope.
13.85	Ridge, bears E. and W., desc. 40 ft. over N. slope.
23.70	Wash, 15 lks. wide, 3 ft. deep, drains W., asc. 30 ft. over S. slope.
28.50	Spur, slopes W., desc. 20 ft. over N. slope.

Dependent Resurvey of the East Boundary, T. 19 S., R. 25 E.

CHAINS

- 31.00 Small draw, drains W., asc. 20 ft. over S. slope.
- 33.35 Small spur, slopes W., desc. 65 ft. over N. slope.
- 38.10 Wash, 10 lks. wide, 1 ft. deep, drains irregularly W., asc. 20 ft. over SW. slope.
- 39.52 Point for the cor. of secs. 7 and 18, T. 19 S., R. 26 E., 80.00 chs. northing from the cor. of secs. 18 and 19, T. 19 S., R. 26 E.

Set an iron post, 30 ins. long, 2½ ins. diam., 4 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T19S
R25E R26E
S13 | S7
 | S18
 1963

- 40.27 Point for the cor. of secs. 7, 12, 13 and 18 at proportionate dist.; there is no remaining evidence of the original cor. This cor. will now function as the cor. of secs. 12 and 13, T. 19 S., R. 25 E. only.

Set and iron post, 30 ins. long, 2½ ins. diam., 8 ins. in ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T19S
R25E R26E
S12 | S7
S13 |
 1963

Land, mountainous, rolling.
Soil, rocky clay.
Timber, scattered juniper S. half mile, no timber north half mile.
Undergrowth, shadscale and greasewood.

N. 0°02' W., along the E. bdy. of sec. 12.

Over mountainous land through shadscale and greasewood undergrowth. Asc. 15 ft. over SW. slope.

- 0.40 Point of small spur, slopes W., desc. 10 ft. over N. slope.
- 0.80 Wash, 10 lks. wide, 2 ft. deep, drains W., asc. 20 ft. over gently rolling land.
- 7.40 Wash, 10 lks. wide, 3 ft. deep, drains W., asc. 100 ft. over S. slope.
- 14.40 Ridge, bears E. and W., desc. 100 ft. over NW. slope.
- 29.80 Wash, 15 lks. wide, 2 ft. deep, drains NW., asc. 15 over SW. slope.
- 35.20 Small spur, slopes W., desc. 10 ft. over N. slope.
- 39.25 Point for the ¼ sec. cor. of sec. 7, T. 19 S., R. 26 E., 40.00 chs. northing from the cor. of secs. 7 and 18, T. 19 S., R. 26 E.

Dependent Resurvey of the East Boundary, T. 19 S., R. 25 E.

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 8 ins. in the ground to bedrock, and in a mound of stone, $3\frac{1}{2}$ ft. base to top, with brass cap mkd.

T19S
R25E R26E
 $\frac{1}{2}$
S7
1963

39.95 Road, unimproved, bears irregularly NW. and SE.

40.27 The $\frac{1}{2}$ sec. cor. of secs. 7 and 12, monumented with a sandstone, 18x10x2 ins., set, mkd. and witnessed as described in the official record. This cor. will now function as the $\frac{1}{2}$ sec. cor. of sec. 12, T. 19 S., R. 25 E., only.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T19S
R25E R26E
 $\frac{1}{2}$
S12
1963

Bury original stone cor. alongside iron post.

N. $0^{\circ}01'$ W., beginning new measurement.

0.15 Wash, 15 lks. wide, 3 ft. deep, drains W., asc. 35 ft. over S. slope.

2.90 Spur, slopes W., desc. 15 ft. over N. slope.

9.70 Wash, 10 lks. wide, 2 ft. deep, drains W., asc. 20 ft. over S. slope.

16.00 Spur, slopes W., desc. 50 ft. over N. slope.

30.10 Wash, in draw, drains W., asc. 120 ft. over S. slope.

35.50 Point of spur, slopes W., desc. 70 ft. over NW. slope.

38.98 Point for the cor. of secs. 6 and 7, T. 19 S., R. 26 E., 80.00 chs. northing from the cor. of secs. 7 and 18, T. 19 S., R. 26, E.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 8 ins. in the ground to bedrock, and in a mound of stone, $3\frac{1}{2}$ ft. base to top, with brass cap mkd.

T19S
R25E R26E
S12 | S6
S7
1963

40.11 Point for the cor. of secs. 1, 6, 7 and 12 at proportionate dist.; there is no remaining evidence of the original cor. This cor. will now function as the cor. of secs. 1 and 12, T. 19 S., R. 25 E. only.

Dependent Resurvey of the East Boundary, T. 19 S., R. 25 E.

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone to top, with brass cap mkd.

T19S
R25E R26E
— S1 | S6
S12 |
1963

Land, mountainous.
Soil, rocky clay.
No timber.
Undergrowth, shadscale and greasewood.

N. 0°01' W., along the E. bdy. of sec. 1.

Over rolling land through scattered greasewood and shadscale undergrowth. Desc. 45 ft. over NW. slope.

- 7.10 Bitter Creek, 2.00 chs. wide, 6 ft. deep, drains irregularly S.
- 9.40 Bitter Creek, drains irregularly south from irregularly N., asc. 80 ft. over SW. slope.
- 17.60 Trail road, bears E. and NW.
- 22.70 Same road, bears NE. and SW.
- 30.25 Spur, slopes W., desc. 60 ft. over N. slope.
- 38.87 Point for the ¼ sec. cor. of sec. 6, T. 19S., R. 26 E., 40.00 chs. northing from the cor. of secs. 6 and 7, T. 19 S., R. 26 E.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone to top, with brass cap mkd.

T19S
R25E R26E
¼
|
S6
1963

- 40.11 The ¼ sec. cor. of secs. 1 and 6, monumented with a sandstone, 30x12x6 ins., set, mkd. and witnessed as described in the official record. This cor. will now function as the ¼ sec. cor. of sec. 1, T. 19 S., R. 25 E. only.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone to top, with brass cap mkd.

T19S
R25E R26E
¼
|
S1
1963

Bury original stone cor. alongside iron post.

Dependent Resurvey of the East Boundary, T. 19 S., R. 25 E.

CHAINS

- N, 0°02' E., beginning new measurement.
- Continue over gently rolling land.
- 4.75 Bitter Creek, 2.00 chs. wide, 6 ft. deep, drains irregularly S. from NE.
- 7.95 Wash, 10 lks. wide, 3 ft. deep, drains SE. to Bitter Creek.
- 34.35 Wash, 25 lks. wide, 5 ft. deep, drains SE. to Bitter Creek.
- 40.15 The cor. of Tps. 18 and 19 S., Rs. 25 and 26 E., monumented with a 3 in. iron post, set, mkd. and witnessed as described in the official record of the 1915 survey of the S. bdy., T. 18 S., R. 26 E.
- Land, rolling.
Soil, rocky clay.
No timber.
Undergrowth, shadscale and greasewood.

Dependent Resurvey of the South Boundary, T. 19 S., R. 25 E.

Reestablishment of the Survey Executed by Frank E. Baxter in 1894.

- From the cor. of Tps. 19 and 20 S., Rs. 25 and 26 E., hereinbefore described.
- S. 89°51' W., bet. secs. 1 and 36.
- Over mountainous land through greasewood and shadscale undergrowth. By triangulation,
- 14.50 Base of ledge, bears NE. and SW., asc. abruptly about 50 ft.
- 15.00 Top of ledge, bears NE. and SW. End triangulation, desc. 100 ft. over W. slope.
- 18.00 Head of draw, drains N. 1.00 chs. thence W.
- 31.00 Wash, 20 lks. wide, 6 ft. deep, drains SW., enter bottom land.
- 40.19 Point for the $\frac{1}{2}$ sec. cor. of secs. 1 and 36 at proportionate dist.; there is no remaining evidence of the original cor.
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.
- T19S R25E
 $\frac{1}{2}$ S36
S1
T20S
1963
- Dig pits, 18x18x12 in., E. and W. of cor., 3 ft. dist.
- 42.20 Bitter Creek, 1.50 chs. wide, 3 ft. deep, drains S., asc. 180 ft. over NE. slope.
- 48.30 Road, unimproved, bears N. and S.

Dependent Resurvey of the South Boundary, T. 19 S., R. 25 E.

CHAINS

54.00

Wash, 10 lks. wide, 1 ft. deep, drains NE.

70.00

Ridge, bears N. and S.; desc. 30 ft. over gentle W. slope.

80.38

The cor. of secs. 1, 2, 35 and 36, monumented with a sandstone, 16x14x5 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone to top, with brass cap mkd.

T19S R25E

S35 | S36

S2 | S1

T20S

1963

Bury original stone cor. alongside iron post.

Land, mountainous.

Soil, sandy clay.

No timber.

Undergrowth, shadscale, greasewood and sagebrush.

N. 89°59' W., bet. secs. 2 and 35.

Over mountainous land through shadscale and sagebrush undergrowth. Desc. 30 ft. over W. slope.

7.00

Small wash, drains N., asc. 35 ft. over E. slope.

10.70

Small spur, slopes N., desc. 140 ft. over NW. slope.

23.00

Wash, 15 lks. wide, 4 ft. deep, drains NE., asc. 300 ft. over steep E. slope.

34.50

Rim of mesa, bears N. and S. Enter dense juniper timber. Desc. 25 ft. over gentle W. slope.

40.24

The ½ sec. cor. of secs. 2 and 35, monumented with a sandstone, 18x10x4 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 4 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T19S R25E

½ S35

S2

T20S

1963

Bury original stone cor. in mound of stone alongside iron post.

From this cor., U.S.C. & G.S. triangulation station "West", bears S. 12°18' E., 12.65 chs. dist., monumented with a brass tablet set in solid sandstone.

Dependent Resurvey of the South Boundary, T. 19 S., R. 25 E.

CHAINS									
8.90	<p>West, beginning new measurement.</p> <p>Desc. 175 ft. over NW. slope.</p>								
18.00	<p>Head of draw, drains NW.</p>								
22.00	<p>Draw, 30 ft. deep, drains NW.</p>								
34.00	<p>Point of spur, slopes NW., continue descent.</p>								
40.17	<p>Enter gently sloping bench land.</p> <p>The cor. of secs. 2, 3, 34 and 35, monumented with a sandstone, 16x8x4 ins., set, mkd. and witnessed as described in the official record.</p> <p>At the cor. point</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone to top, with brass cap mkd.</p> <div style="text-align: center;"> <p>T19S R25E</p> <table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td>S34</td> <td>S35</td> </tr> <tr> <td>S3</td> <td>S2</td> </tr> <tr> <td colspan="2">T20S</td> </tr> <tr> <td colspan="2">1963</td> </tr> </table> </div> <p>Bury original stone cor. alongside iron post.</p> <p>Land, mountainous. Soil, rocky clay. Timber, medium dense juniper W. portion; no timber E. portion. Undergrowth, shadscale and sagebrush.</p>	S34	S35	S3	S2	T20S		1963	
S34	S35								
S3	S2								
T20S									
1963									
0.90	<p>West, bet. secs. 3 and 34.</p> <p>Over gently sloping bench land, through scattered juniper timber with sagebrush undergrowth. Desc. 105 ft. over gentle NW. slope.</p>								
21.00	<p>Wash, 10 lks. wide, 2 ft. deep, drains NW.</p>								
40.06	<p>Wash, 15 lks. wide, 3 ft. deep, drains NW.</p> <p>The ½ sec. cor. of secs. 3 and 34, monumented with a sandstone, 20x10x4 ins., set, mkd. and witnessed as described in the official record.</p> <p>At the cor. point</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone to top, with brass cap mkd.</p> <div style="text-align: center;"> <p>T19S R25E</p> <table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td>½</td> <td>S34</td> </tr> <tr> <td></td> <td>S3</td> </tr> <tr> <td colspan="2">T20S</td> </tr> <tr> <td colspan="2">1963</td> </tr> </table> </div> <p>Bury original stone cor. alongside iron post.</p>	½	S34		S3	T20S		1963	
½	S34								
	S3								
T20S									
1963									

Dependent Resurvey of the South Boundary, T. 19 S., R. 25 E.

CHAINS	
	<p>S. 89°58' W., beginning new measurement.</p> <p>Desc. 80 ft. over gentle W. slope.</p>
21.80	<p>Rim of bench; bears NW. and SE., desc. 195 ft. over steep SW. slope. Leave timber.</p>
27.00	<p>Base of descent, bears NW. and SE., enter nearly level bottom land.</p>
27.60	<p>Gravel road to Westwater, bears N. 38° W. and S. 38° E.</p>
29.35	<p>Power line, bears N. 38°10' W. and S. 38°10' E.</p>
36.40	<p>Center of Westwater wash, 2.00 chs. wide, 6 ft. deep, drains SE.</p>
40.09	<p>Point for the cor. of secs. 3, 4, 33 and 34 at proportionate dist. falls in creek bottom subject to overflow and deemed unsafe to perpetuate. There is no remaining evidence of the original cor.</p> <p>From this point, the point selected for the witness cor. of secs. 3, 4, 33 and 34, bears S. 0°08' E., 2.89 chs. dist.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone to top, with brass cap mkd.</p> <p style="text-align: center;">T19S R25E W C <u>S33†S34</u> S4 S3 T20S 1963</p> <p>Land, gently sloping bench land E. portion; bottom land W. portion. Soil, sandy clay. Timber, scattered juniper E. portion; no timber W. portion. Undergrowth, shadscale and sagebrush E. portion; greasewood W. portion.</p>
25.00	<p>S. 89°58' W., bet. secs. 4 and 33.</p> <p>Over gently rolling land through dense greasewood and rabbit brush.</p>
40.09	<p>Westwater Wash, 2.00 chs. wide, 5 ft. deep, drains NE. from SW.</p>
40.09	<p>Point for the ¼ sec. cor. of secs. 4 and 33 at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone to top, with brass cap mkd.</p> <p style="text-align: center;">T19S R25E ¼ <u>S33</u> S4 T20S 1963</p>

CHAINS

- 51.30 Westwater Wash, drains SE. from NW. Asc. 20 ft. over E. slope.
- 52.50 Small spur, slopes N., thence over nearly level desert land. Leave dense greasewood.
- 59.50 Wash, 20 lks. wide, 4 ft. deep, drains NE.
- 80.18 Point for the cor. of secs. 4, 5, 32 and 33 at proportionate dist.; there is no remaining evidence of the original cor.
- Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone to top, with brass cap mkd.

T19S R25E

S32|S33

S5|S4

T20S

1963

Land, gently rolling to nearly level desert.
Soil, clay.
No timber.
Undergrowth, dense greasewood E. portion; shadscale and scattered greasewood W. portion.

S. 89°58' W., bet. secs. 5 and 32.

Over rolling land through shadscale undergrowth. Asc. 25 ft. over NE. slope.

- 4.60 Head of wash, drains N.
- 9.40 Point of spur, slopes N., desc. 25 ft. over NW. slope.
- 14.70 Wash, 40 lks. wide, 6 ft. deep, drains NE., asc. 125 ft. over SE. slope.
- 34.80 Ridge, bears N. and S., desc. 20 ft. along S. slope.
- 40.09 The ½ sec. cor. of secs. 5 and 32, monumented with a sandstone, 14x8x3 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone to top, with brass cap mkd.

T19S R25E

½ S32

S5

T20S

1963

Bury original stone cor. alongside iron post.

S. 89°55' W., beginning new measurement.

Desc. 50 ft. over SW. slope.

Dependent Resurvey of the South Boundary, T. 19 S., R. 25 E.

CHAINS

- 7.70 Wash, 20 lks. wide, 6 ft. deep, drains SE. curving E., asc. 45 ft. over NE. slope.
- 15.85 Small spur slopes N., desc. 15 ft. over W. slope.
- 17.50 Small wash, drains N., asc. 15 ft. over E. slope.
- 20.00 Small spur, slopes N., desc. 30 ft. over NW. slope.
- 24.30 Wash, 15 lks. wide, 3 ft. deep, drains NE.
- 27.60 Wash, 10 lks. wide, 2 ft. deep, drains N.
- 35.00 Wash, 60 lks. wide, 10 ft. deep, drains N. 75° E., asc. 10 ft. over gentle W. slope.
- 39.92 The cor. of secs. 5, 6, 31 and 32, monumented with a sandstone, 16x14x2 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone to top, with brass cap mkd.

T19S R25E
S31 | S32
 S6 | S5
 T20S
 1963

Bury original stone cor. alongside iron post.

Land, rolling desert.
 Soil, clay.
 No timber.
 Undergrowth, shadscale.

N. 89°51' W., bet. secs. 6 and 31.

Over gently rolling desert land through scattered shadscale undergrowth. Asc. 30 ft. over gently rolling SE. slope.

- 40.19 The ¼ sec. cor. of secs. 6 and 31, monumented with a sandstone, 14x10x2 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T19S R25E
¼ S31
 S6
 T20S
 1963

Bury original stone cor. alongside iron post.

No accessories available.

Dependent Resurvey of the South Boundary, T. 19 S., R. 25 E.

CHAINS

#KIAM?

- S. 89°59' W., beginning new measurement.
Asc. 75 ft. over W. slope.
- 15.10 Underground Natural Gas Line, bears S. 45°43' W. and N. 45°43' E.
- 21.55 Center line of U. S. Highway 50 and 6, bears N. 45°27' E. and S. 45°27' W.
- 37.30 Wash, 20 lks. wide, 6 ft. deep, drains S.
- 39.58 The cor. of Tps. 19 and 20 S., Rs. 24 and 25 E., monumented with a 3 in. iron post, set, mkd. and witnessed as described in the official record of the 1931 survey.
Land, gently rolling desert.
Soil, clay.
No timber.
Undergrowth, shadscale.

Dependent Resurvey of the Subdivision, T. 19 S., R. 25 E.

Reestablishment of the Survey Executed by Frank E. Baxter
in 1894.

- From the cor. of secs. 1, 2, 35 and 36.
N. 0°01' E., bet. secs. 35 and 36.
Over broken land through scattered juniper timber with dense shadscale and sagebrush undergrowth. Desc. 40 ft. over gentle NW. slope.
- 14.90 Wash, 15 lks. wide, 2 ft. deep, drains irregularly E., asc. 20 ft.
- 22.30 Spur, slopes NE., desc. 25 ft. over NW. slope.
- 25.50 Draw, drains E., asc. 50 ft. over S. slope.
- 40.22 The $\frac{1}{2}$ sec. cor. of secs. 35 and 36, monumented with a sandstone, 14x12x2 ins., set, mkd. and witnessed as described in the official record.
At the cor. point.
Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 10 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T19S R25E

$$\frac{1}{2}$$
 S35|S36
1963

Bury original stone cor. alongside iron post.

Dependent Resurvey of the Subdivision, T. 19 S., R. 25 E.

CHAINS

N. 0°01' W., Beginning new measurement.

Desc. 50 ft. over NW. slope.

7.00 Wash, 10 lks. wide, 3 ft. deep, drains NE., asc. 10 ft. over SE. slope

11.50 Small spur, slopes NE., desc. 15 ft. over N. slope.

15.80 Wash, 15 lks. wide, 2 ft. deep, drains NE.

21.50 Wash, 15 lks. wide, 3 ft. deep, drains NE., asc. 90 ft. over SE. slope.

37.50 Ridge, bears E. and W., desc. 30 ft. over N. slope.

40.17 The cor. of secs. 25, 26, 35 and 36, monumented with a sandstone, 16x30x3 ins., set, mkds. and witnessed as described in the official record.

At the cor. point.

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T19S R25 E.

S26 | S25

S35 | S36

1963

Bury original stone cor. alongside iron post.

Land, broken desert

Soil, rocky clay.

Timber, scattered juniper.

Undergrowth, shadscale and sagebrush.

From the cor. of secs. 25, 30, 31 and 36 on the E. bdy. of the Tp.

N. 89°56' W., bet. secs. 25 and 36.

Over broken, rolling desert through scattered juniper timber with shadscale and greasewood undergrowth. Desc. 125 ft. over SW. slope.

0.50 Wash, 10 lks. wide, 3 ft. deep, drains SW.

16.30 Wash, 10 lks. wide, 3 ft. deep, drains SW.

30.40 Road, unimproved, bears irregularly N. and S.

38.70 Bitter Creek, 1.50 chs. wide, 8 ft. deep, drains S., asc. 25 ft. over SE. slope.

40.11 Point for the ¼ sec. cor. of secs. 25 and 36 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone to top, with brass cap mkd.

T19S R25 E

¼ S25

S36

1963

Dependent Resurvey of the Subdivision, T. 19 S., R. 25 E.

CHAINS	STATIONS
	Asc. 70 ft. over SE. slope.
52.10	Spur, slopes NE., asc. 90 ft. over NE. slope.
56.20	Wash, 10 lks. wide, 3 ft. deep, drains NE.
64.00	Ridge, bears N. and S., desc. 55 ft. over SW. slope.
74.70	Wash, 15 lks. wide, 2 ft. deep, drains SW., asc. 20 ft. over SE. slope.
76.30	Wash, 10 lks. wide, 2 ft. deep, drains SE.
80.22	The cor. of secs. 25, 26, 35 and 36. Land, broken, rolling desert. Soil, clay. Timber, scattered juniper. Undergrowth, shadscale and greasewood.
	N. 0°01' W., bet. secs. 25 and 26. Over mountainous land through scattered shadscale and sagebrush undergrowth. Asc. 385 ft. over S. slope.
12.00	Ascent becomes abrupt.
37.20	Head of draw, drains SW., asc. 65 ft. over SW. slope.
40.00	Top of ledge, 40 ft. high, bears NW. and SE.
40.13	The 1/2 sec. cor. of secs. 25 and 26, monumented with a sandstone, 18x12x3 ins., set, mkd. and witnessed as described in the official record. At the cor. point. Set an iron post, 30 ins. long, 2 1/2 ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd. T19S R25E 1/2 S26 S25 1963 Bury original stone cor. alongside iron post.
	N. 0°01' W., beginning new measurement. Asc. 130 ft. over steep S. slope.
5.80	Rim of mesa, bears E. and W. Enter dense timber., thence over gently rolling mesa.
40.06	The cor. of secs. 23, 24, 25 and 26, monumented with a sandstone, 16x14x5 ins., set, mkd. and witnessed as described in the official record. At the cor. point Set an iron post, 30 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, and in a collar of stone to top, with brass cap mkd.

Dependent Resurvey of the Subdivision, T. 19 S., R. 25 E.

CHAINS

T19S R25E
 S23 | S24
 S26 | S25
 1963

Bury original stone cor. alongside iron post.

Land, mountainous, S. portion; rolling mesa N. portion
 Soil, rocky sandy clay.
 No timber S. portion; dense juniper N. portion.
 Undergrowth, scattered shadscale and sagebrush.

From the cor. of secs. 19, 24, 25 and 30, on the E. bdy
 S. 89°54' W., bet. secs. 24 and 25.

Over rolling desert land through dense shadscale under-
 growth.

9.10 Wash, 15 lks. wide, 3 ft. deep, drains SW.

30.80 Bitter Creek, 1.50 chs. wide, 8 ft. deep, drains irreg-
 ularly S., asc. 40 ft. over E. slope.

40.35 The 1/2 sec. cor. of secs. 24 and 25, monumented with a
 sandstone, 18x12x4 ins., set, mkd. and witnessed as de-
 scribed in the official record.

At the cor. point

Set an iron post, 30 ins. long; 2 1/2 ins. diam., 14 ins.
 in the ground to bedrock, and in a mound of stone, 3 ft.
 base to top, with brass cap mkd.

T19S R25E
 1/2 S24
 S25
 1963

Bury original stone cor. alongside iron post.

S. 89°54' W., beginning new measurement.

By triangulation, asc. about 300 ft. over steep E. slope.

38.20 Rim of mesa, bears N. and S. End triangulation. Thence
 over gently rolling mesa through dense juniper timber.

39.96 The cor. of secs. 23, 24, 25 and 26.

Land, rolling E. portion; mountainous W. portion.
 Soil, rocky clay.
 No timber E. portion; dense juniper W. portion.
 Undergrowth, shadscale.

N. 0°01' W., bet. secs. 23 and 24.

Over rolling mesa through dense juniper timber with shad-
 scale and sagebrush undergrowth. Asc. 40 ft. over gentle
 S. slope.

20.00 Rim of mesa, desc. 190 ft. over N. slope.

Dependent Resurvey of the Subdivision, T. 19 S., R. 25 E.

CHAINS

- 39.70 Wash, 20 lks. wide, 3 ft. deep, drains E.
- 40.08 Point for the $\frac{1}{2}$ sec. cor. of secs. 23 and 24 at proportionate dist.; there is no remaining evidence of the original cor.
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins. in the ground to bedrock, and in a mound of stone, $3\frac{1}{2}$ ft. base to top, with brass cap mkd.
- T19S R25E
 $\frac{1}{2}$
S23|S24
1963
- Desc. 50 ft. along E. slope.
- 44.35 Draw, drains E., asc. 35 ft. along E. slope.
- 55.25 Wash, 20 lks. wide, 6 ft. deep, drains E.
- 65.05 Spur, slope E., desc. 185 ft. over N. slope.
- 80.16 The cor. of secs. 13, 14, 23 and 24, monumented with a sandstone, 14x12x10 ins., set, mkd. and witnessed as described in the official record.
- At the cor. point
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 8 ins. in the ground to bedrock, and in a mound of stone, $3\frac{1}{2}$ ft. base to top, with brass cap mkd.
- T19S R25E
S14|S13
S23|S24
1963
- Bury original stone cor. alongside iron post.
- Land, rolling mesa and bench land sloping E.
Soil, rocky clay.
Timber, dense juniper S. portion; no timber N. portion.
Undergrowth, shadscale and sagebrush.
-
- From the cor. of secs. 13 and 24, on the E. bdy of the Tp.
- S. $89^{\circ}51'$ W., bet secs. 13 and 24.
- Over rolling land through dense juniper timber with shadscale undergrowth. Desc. 225 ft. over NW. slope.
- 3.45 Leave timber, bears NE. and SW.
- 8.00 Wash, 20 lks. wide, 1 ft. deep, drains NW.
- 25.50 Bitter Creek, 1.50 chs. wide, 6 ft. deep, drains irregularly S., asc. 60 ft. over E. slope.
- 40.00 Point for the $\frac{1}{2}$ sec. cor. of secs. 13 and 24 at proportionate dist.; there is no remaining evidence of the original cor.

Dependent Resurvey of the Subdivision of T. 19 S., R. 25 E.

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T19S R25E

$\frac{1}{2}$ S13
S24
1963

Asc. 35 ft. over E. slope.

42.25 Low ridge, bears E. and W., desc. 35 ft. over W. slope.

54.40 Road, unimproved, bears N. and S.

65.10 Wash, 20 lks. wide, 3 ft. deep, drains S., asc. 70 ft. over E. slope.

80.00 The cor. of secs. 13, 14, 23 and 24.

Land, rolling.

Soil, sandy clay.

Timber, dense juniper E. 3.50 chs.; no timber W. 76.50 chs.

Undergrowth, shadscale.

N. $0^{\circ}01'$ W., bet. secs. 13 and 14.

Over broken bench land sloping E., through shadscale undergrowth. Asc. 50 ft. over SE. slope.

4.20 Spur, slopes E., desc. 105 ft. over NE. slope.

15.00 Base of descent, bears NW. and SE., thence over nearly level land.

19.90 Wash, 20 lks. wide, 3 ft. deep, drains SE., asc. 25 ft. over SE. slope.

28.70 Wash, 20 lks. wide, 2 ft. deep, drains SE.

34.00 Wash, 30 lks. wide, 2 ft. deep, drains E., asc. 30 ft. over S. slope.

40.10 Point for the $\frac{1}{2}$ sec. cor. of secs. 13 and 14 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 8 ins. in the ground to bedrock, and in a mound of stone, 8 ft. base to top, with brass cap mkd.

T19S R25E

$\frac{1}{2}$ S14|S13
1963

By triangulation, asc. about 300 ft. over steep S. slope.

54.00 Rim of mesa, bears E. and W., thence over gently rolling mesa through dense juniper timber. End triangulation.

75.25 Rim of mesa, bears E. and W., Desc. 135 ft. over N. slope.

80.20 The cor. of secs. 11, 12, 13 and 14, monumented with a sandstone, 20x16x4 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Dependent Resurvey of Subdivision, T. 19 S., R. 25 E.

CHAINS

Set an iron post, 30 ins. long, $\frac{1}{2}$ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T19S R25E
 $\frac{S11}{S14}$ | $\frac{S12}{S13}$
 1963

Bury original stone cor. alongside iron post.

Land, broken bench and mesa.

Soil, rocky clay.

Timber, dense juniper N. portion; no timber S. portion.

Undergrowth, shadscale.

From the cor. of secs. 12 and 13, on the E. bdy of the Tp.

S. $89^{\circ}32'$ W., bet. secs. 12 and 13.

Over rolling land through shadscale undergrowth. Desc. 125 ft. over general W. slope.

- 3.90 Wash, 25 lks. wide, 3 ft. deep, drains SW.
- 21.10 Wash, 15 lks. wide, 1 ft. deep, drains irregularly W.
- 32.40 Point of spur, slopes N., desc. 45 ft. over NW. slope.
- 40.01 The $\frac{1}{2}$ sec. cor. of secs. 12 and 13, monumented with a sandstone, $16 \times 12 \times 6$ ins., set, mkd. and witnessed as described in the official record.
- At the cor. point
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 16 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.
- T19S R25E
 $\frac{1}{2}$ $\frac{S12}{S13}$
 1963
- Bury original stone cor. alongside iron post.
- S. $89^{\circ}51'$ W., beginning new measurement.
- Desc. 15 ft. over NW. slope.
- 4.00 Bitter Creek, 1.50 chs. wide, 6 ft. deep, drains irregularly S., asc. 55 ft. over gentle SE. slope.
- 18.50 Wash, 15 lks. wide, 1 ft. deep, drains SE.
- 23.00 Road, unimproved, bears irregularly N. and S., asc. 335 ft. over steep E. slope.
- 37.40 Top of ascent, slopes N., thence along N. slope through dense juniper timber.
- 40.03 The cor. of secs. 11, 12, 13 and 14.

Dependent Resurvey of Subdivision, T. 19 S., R. 25 E.

CHAINS

Land, rolling E. portion; mountainous W. portion.
Soil, rocky sandy clay.
Timber, dense juniper W. portion; no timber E. portion.
Undergrowth, shadscale.

N. 0°05' W., bet. secs. 11 and 12.

Over mountainous land through widely scattered juniper timber with shadscale and grass undergrowth. Desc. 315 ft. over steep N. slope.

18.70 Base of descent, bears E. and W., thence over nearly level land.

20.90 Road, unimproved, bears irregularly E. and W.

24.20 Wash, 20 lks. wide, 2 ft. deep, drains NE.

32.20 Base of mesa, bears E. and W., asc. 135 ft. over steep, rocky S. slope.

40.24 Point for the $\frac{1}{2}$ sec. cor. of secs. 11 and 12 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 8 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T19S R25E

$\frac{1}{2}$
S11 | S12
1963

Asc. 330 ft. over steep, rocky S. slope.

50.10 Rim of mesa, bears E. and W., desc. 25 ft. over gentle NE. slope of mesa. Enter dense juniper timber.

80.48 The cor. of secs. 1, 2, 11 and 12, monumented with a sandstone, 18x12x6 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 12 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T19S R25E

S2 | S1
S11 | S12
1963

Bury original stone cor. alongside iron post.

Land, mountainous.

Soil, rocky sandy clay.

Timber, widely scattered juniper S. portion; dense juniper N. portion.

Undergrowth, shadscale.

Dependent Resurvey of the Subdivision, T. 19 S., R. 25 E.

CHAINS

From the cor. of secs. 1 and 12, on the E. bdy of the Tp.
S. 89°45' W., bet. secs. 1 and 12.

Over rolling desert land through shadscale undergrowth.
Desc. 45 ft. over W. slope.

7.90 Bitter Creek, 2.00 chs. wide, 8 ft. deep, drains irregularly S., thence over nearly level land.

32.10 Road, unimproved, bears irregularly N. and S.

35.40 Leave nearly level land, asc. 60 ft. over E. slope.

39.94 Point for the 1/2 sec. cor. of secs. 1 and 12 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 10 ins. in the ground to bedrock, and in a mound of stone, 3 1/2 ft. base to top, with brass cap mkd.

T19S R25E
1/2 S1
S12
1963

Asc. 10 ft. over E. slope.

41.40 Spur, slopes S., desc. 70 ft. over SW. slope.

55.40 Draw, drains SE., asc. 330 ft. over NE. slope.

79.88 The cor. of secs. 1, 2, 11 and 12.

Land, rolling E. portion; mountainous W. portion.
Soil, sandy clay.
No timber.
Undergrowth, shadscale.

N. 0°26' W., bet secs. 1 and 2.

Over rolling desert land, through scattered juniper timber with shadscale undergrowth.

17.90 Rim of bench, bears NE. and SW., desc. 150 ft. over NW. slope.

40.17 The 1/2 sec. cor. of secs. 1 and 2, monumented with a sandstone, 18x14x5 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 15 ins. in the ground to bedrock, and in a collar of stone to top, with brass cap mkd.

T19S R25E
1/2 S2 | S1
1963

Bury original stone cor. alongside iron post.

Dependent Resurvey of the Subdivision, T. 19 S., R. 25 E.

N. 0°07' W., beginning new measurement.

Desc. 175 ft. over N. slope.

11.00 Draw, 30 ft. deep, drains NE.

24.00 Road, unimproved, bears NW. and SE., enter nearly level land.

26.75 Underground Natural Gas line, bears N. 56° E. and S. 56° W.

28.20 Wash, 15 lks. wide, 3 ft. deep, drains NE.

35.25 Wash, 20 lks. wide, 3 ft. deep, drains E.

39.75 Road, unimproved, bears NW. and SE.

40.27 The cor. of secs. 1 and 2, on the N. bdy. of the Tp., monumented with a 2½ in. iron post, set, mkd. and witnessed as described in the official record of the 1960 resurvey of the S. bdy., T. 18 S., R. 25 E.

Land, rolling desert.

Soil, clay.

Timber, scattered juniper.

Undergrowth, shadscale.

From the cor. of secs. 2, 3, 34 and 35, on the S. bdy. of the Tp.

N. 0°04' E., bet. secs. 34 and 35.

Over rolling desert land through scattered juniper timber with shadscale undergrowth.

8.40 Wash, 10 lks. wide, 1 ft. deep, drains S. 75° W.

31.60 Wash, 15 lks. wide, 2 ft. deep, drains S. 75° W., asc. 45 ft. over SE. slope.

36.60 Spur, slopes SW., desc. 15 ft. over NW. slope.

39.40 Small draw, drains W., asc. 5 ft. over S. slope.

40.16 The ¼ sec. cor. of secs. 34 and 35, monumented with a sandstone, 18x6x5 ins.; set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T19S R25E

½
S34 | S35

1963

Bury original stone cor. alongside iron post, and raise a mound of stone, 3 ft. base, 1½ ft. high W. of cor.

Dependent Resurvey of the Subdivision, T. 19 S., R. 25 E.

CHAINS	STAKES
	N. 0°06' E., beginning new measurement.
	Asc. 15 ft. over S. slope.
1.40	Spur, slopes W., desc. 75 ft. over N. slope.
11.30	Wash, 20 lks. wide, 4 ft. deep, drains SW., asc. 60 ft. SE. slope.
22.40	Spur, slopes W., desc. 30 ft. over N. slope.
29.20	Wash, 20 lks. wide, 6 ft. deep, drains W.
32.30	Road, unimproved, bears E. and W.
38.80	Wash, 10 lks. wide, 2 ft. deep, drains W., asc. 15 ft. over S. slope.
40.15	The cor. of secs. 26, 27, 34 and 35, monumented with a sandstone, 16x12x5 ins., set, mkd. and witnessed as described in the official record.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 14 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.
	T19S R25E <u>S27 S26</u> S34 S35 1963
	Bury original stone cor. alongside iron post.
	Land, rolling. Soil, rocky clay. Timber, scattered juniper. Undergrowth, shadscale.
	From the cor. of secs. 25, 26, 35 and 36.
	N. 89°57' W., bet. secs. 26 and 35.
	Over gently sloping bench land through shadscale and sagebrush undergrowth. Asc. 30 ft. over gentle SE. slope.
9.20	Wash, 20 lks. wide, 3 ft. deep, drains S.
24.00	Wash, 15 lks. wide, 2 ft. deep, drains SE.
25.95	Same wash, drains NE. from SW.
34.70	Wash, 15 lks. wide, 2 ft. deep, drains SE.
40.15	The ½ sec. cor. of secs. 26 and 35, monumented with a sandstone, 14x10x8 ins., set, mkd. and witnessed as described in the official record.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground to bedrock, and in a collar of stone to top, with brass cap mkd.

Dependent Resurvey of the Subdivision, T. 19 S., R. 25 E.

T19S R25E

$$\frac{1}{4} \frac{S26}{S35}$$
 1963

Bury original stone cor. alongside iron post.

S. 89°56' W., beginning new measurement.

Asc. 270 ft. over steep NE. slope.

0.80 Wash, 10 lks. wide, 3 ft. deep, drains NE.

19.00 Rim of mesa, bears N. and SE., Desc. 60 ft. over gentle W. slope. Enter dense juniper timber.

30.60 Trail road, bears NW. and SE.

40.07 The cor. of secs. 26, 27, 34 and 35.

Land, gently sloping bench land and mountainous mesa.
Soil, rocky sandy clay.
Timber, dense juniper W. portion; no timber E. portion.
Undergrowth, shadscale and sagebrush.

N. 0°04' W., bet. secs. 26 and 27.

Over rolling W. slope of mesa through scattered juniper timber with shadscale undergrowth. Asc. 80 ft. along W. slope.

4.65 Trail road, bears N. 70° W. and S. 70° E.

7.35 Wash, 20 lks. wide, 2 ft. deep, drains W.

14.70 Rim of small bluff, bears E. and W.

40.12 The $\frac{1}{4}$ sec. cor. of secs. 26 and 27, monumented with a sandstone, 14x10x8 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 4 ins. in the ground to bedrock, and in a mound of stone, 3½ ft. base to top, with brass cap mkd.

T19S R25E

$$\frac{1}{4} \frac{S27}{S26}$$
 1963

Bury original stone cor. alongside iron post.

N. 0°03' W., beginning new measurement.

Continue over rolling W. slope of mesa.

0.30 Wash, 10 lks. wide, 2 ft. deep, drains S. 70° W.

18.30 Wash, 15 lks. wide, 3 ft. deep, drains W.

25.50 Wash, 30 lks. wide, 10 ft. deep, drains W.

Dependent Resurvey of the Subdivision, T. 19 S., R. 25 E.

CHAINS	
35.35	Wash, 20 lks. wide, 12 ft. deep, drains S. 70° W.
40.14	<p>The cor. of secs. 22, 23, 26, 27, monumented with a sandstone, 16x8x6 ins., set, mkd. and witnessed as described in the official record.</p> <p>At the cor. point</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 3½ ft. base to top, with brass cap mkd.</p> <p style="text-align: center;">T19S R25E $\frac{S22}{S27} \frac{S23}{S26}$ 1963</p> <p>Bury original stone cor. alongside iron post.</p> <p>Land, Rolling W. slope of mesa. Soil, rocky clay. Timber, scattered juniper. Undergrowth, shadscale and sagebrush.</p>
	<p>From the cor. of secs. 23, 24, 25 and 26.</p> <p>N. 89°55' W., bet. secs. 23 and 26.</p> <p>Over rolling mesa land through dense juniper timber with shadscale undergrowth. Desc. 95 ft. over gently rolling SW. slope.</p>
6.80	Wash, 10 lks. wide, 1 ft. deep, drains SW.
23.70	Wash, 20 lks. wide, 3 ft. deep, drains SW.
36.65	Trail road, bears NE. and SW.
40.08	<p>The ¼ sec. cor. of secs. 23 and 26, monumented with a sandstone, 15x11x4 ins., set, mkd. and witnessed as described in the official record.</p> <p>At the cor. point</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground to bedrock, and in a collar of stone to top, with brass cap mkd.</p> <p style="text-align: center;">T19S R25E ¼ $\frac{S23}{S26}$ 1963</p> <p>Bury original stone cor. alongside iron post.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 89°54' W., beginning new measurement.</p> <p>Desc. 140 ft. over rolling SW. slope of mesa.</p>
8.10	Wash, 20 lks. wide, 1 ft. deep, drains SW.
32.90	Wash, 15 lks. wide, 2 ft. deep, drains SW.
40.15	The cor. of secs. 22, 23, 26 and 27.

Dependent Resurvey of the Subdivision, T. 19 S., R. 25 E.

CHAINS

Land, rolling mesa.
Soil, rocky clay.
Timber, dense juniper.
Undergrowth, shadscale.

North, bet. secs. 22 and 23.

Over rolling mesa land through medium dense juniper timber with shadscale undergrowth. Desc. 35 ft. over NW. slope.

10.45 Wash, in small draw, drains S. 70° W., asc. 35 ft. over SE. slope.

21.25 S. rim of canyon, bears NE. and SW., desc. 95 ft. over steep NW. slope.

25.00 Bottom of canyon, drains SW., asc. 95 ft. over SE. slope.

26.60 N. rim of canyon, bears NE. and SW., thence over nearly level land.

40.13 The $\frac{1}{2}$ sec. cor. of secs. 22 and 23, monumented with a sandstone, 16x10x4 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 4 ins. in the ground to bedrock, and in a mound of stone, 3 $\frac{1}{2}$ ft. base to top, with brass cap mkd.

T19S R25E

$\frac{1}{2}$
S22|S23
1963

Bury original stone cor. alongside iron post.

N. 0°02' W., beginning new measurement.

Over broken mesa land. Asc. 20 ft. over SE. slope.

12.50 S. rim of canyon, bears NE. and SW., desc. 80 ft. over N. slope.

23.90 Bottom of canyon, drains S. 70° W., asc. 70 ft. over SE. slope.

29.90 Spur, slopes S. 70° W., desc. 40 ft. over NW. slope.

33.85 Bottom of canyon, drains SW., asc. 70 ft. over SE. slope.

40.15 The cor. of secs. 14, 15, 22 and 23, monumented with a sandstone, 16x10x4 ins., set, mkd. and witnessed as described in the official record.

At the cor. point.

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 10 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

Dependent Resurvey of the Subdivision, T. 19 S., R. 25 E.

CHAINS

T19S R25E

S15 | S14

S22 | S23

1963

Bury original stone cor. alongside iron post.

Land, rolling and broken mesa.

Soil, rocky clay.

Timber, medium dense juniper.

Undergrowth, shadscale.

From the cor. of secs. 13, 14, 23 and 24.

N. 89°55' W., bet. secs. 14 and 23.

Over mountainous land through scattered juniper timber with shadscale undergrowth. Asc. 120 ft. over E. slope.

- 8.40 Spur, slopes N., desc. 120 ft. over NW. slope.
- 18.80 Wash, 20 lks. wide, 3 ft. deep, drains NE., asc. 50 ft. over SE. slope.
- 27.20 Spur, slopes N., desc. 35 ft. over NW. slope.
- 30.70 Wash, 15 lks. wide, 2 ft. deep, drains NE., asc. 100 ft. over steep E. slope.
- 40.19 Point for the $\frac{1}{2}$ sec. cor. of secs. 14 and 23 at proportionate dist.; there is no remaining evidence of the original cor.
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 8 ins. in the ground to bedrock, and in a mound of stone, $3\frac{1}{2}$ ft. base to top, with brass cap mkd.
- T19S R25E
 $\frac{1}{2}$ S14
S23
1963
- Asc. 205 ft. over steep E. slope.
- 47.10 Rim of mesa, bears N. and S. Enter dense juniper timber, desc. 85 ft. over rolling SW. slope of mesa.
- 48.50 Trail road, bears N. and S.
- 65.50 Wash, 25 lks. wide, 4 ft. deep, drains SW.
- 74.10 Wash, 20 lks. wide, 2 ft. deep, drains SW., asc. 15 ft. over SE. slope.
- 80.38 The cor. of secs. 14, 15, 22 and 23.
- Land, mountainous.
Soil, rocky clay.
Timber, scattered juniper E. portion; dense juniper W. portion.
Undergrowth, shadscale.

Dependent Resurvey of Subdivision, T. 19 S., R. 25 E.

CHAINS

N. 0°01' E., bet. secs. 14 and 15.

Over rolling W. slope of mesa through dense juniper with shadscale undergrowth. Asc. 15 ft. over SE. slope.

3.40 Low ridge, bears NE. and SW., desc. 20 ft. over NW. slope.

15.30 Wash, 30 lks. wide, 1 ft. deep, drains SW., asc. 25 ft. over SE. slope.

22.10 Leave dense juniper timber, thence along gently rolling W. slope of mesa.

36.50 Wash, 15 lks. wide, 2 ft. deep, drains SW.

40.17 The 1/2 sec. cor. of secs. 14 and 15, monumented with a sandstone, 12x8x3 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, and in a collar of stone to top, with brass cap mkd.

T19S R25E

1/2
S15|S14
1963

Bury original stone cor. alongside iron post.

North, beginning new measurement.

Desc. 30 ft. along gently rolling W. slope of mesa.

35.70 Wash, 10 lks. wide, 1 ft. deep, drains W.

40.14 The cor. of secs. 10, 11, 14 and 15, monumented with a sandstone, 20x10x5 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 18 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T19S R25E

S10|S11
S15|S14
1963

Bury original stone cor. alongside iron post.

Land, rolling W. slope of mesa.

Soil, rocky clay.

Timber, dense juniper S. portion; scattered juniper N. portion.

Undergrowth, shadscale.

From the cor. of secs. 11, 12, 13 and 14.

Dependent Resurvey of Subdivision, T. 19 S., R. 25 E.

CHAINS

N. 89°47' W., bet. secs. 11 and 14.

Over rolling mesa land through scattered juniper timber with shadscale undergrowth. Desc. 100 ft. along N. slope.

- 9.15 Wash, 20 lks. wide, 6 ft. deep, drains N., asc. 160 ft. over NE. slope.
- 19.80 Wash, 40 lks. wide, 8 ft. deep, drains NE.
- 27.40 Road, unimproved. bears SE. and NW.
- 33.10 Rim of mesa, bears N. and curves E., desc. 10 ft. over gentle W. slope.
- 40.17 Point for the $\frac{1}{4}$ sec. cor. of secs. 11 and 14 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., over an (X), on solid sandstone, and in a mound of stone, 5 ft. base to top, with brass cap mkd.

T19S R25E

$$\frac{1}{4} \frac{S11}{S14}$$
 1963

Desc. 55 ft. over gentle W. slope.

- 40.50 Road, unimproved, bears NW. and SE.
- 75.40 Enter dense juniper timber, bears N. and S.
- 80.34 The cor. of secs. 10, 11, 14 and 15.
- Land, rolling mesa.
Soil, rocky, sandy clay.
Timber, scattered juniper E. portion; dense juniper W. portion.
Undergrowth, shadscale.

N. 0°02' E., bet. secs. 10 and 11.

Over rolling W. slope of mesa through scattered juniper timber with shadscale undergrowth.

- 40.25 The $\frac{1}{4}$ sec. cor. of secs. 10 and 11; monumented with a sandstone, 16x9x6 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 2 ins. in the ground to bedrock, and in a mound of stone, $3\frac{1}{2}$ ft. base to top, with brass cap mkd.

T19S R25E

$$\frac{1}{4} \frac{S10|S11}{1963}$$

Bury original stone cor. alongside iron post.

Dependent Resurvey of the Subdivision, T. 19 S., R. 25 E.

N. 0°01' E., beginning new measurement.

Asc. 15 ft. over SW. slope.

- 5.05 Road, unimproved, bears NW. and SE., desc. 45 ft. over gentle NW. slope.
- 16.20 Underground Natural Gas line, bears N. 33°40' E. and S. 33°40' W.
- 30.65 Wash, 10 lks. wide, 1 ft. deep, drains NW. Road, unimproved, bears NE. and SW.
- 40.16 The cor. of secs. 2, 3, 10 and 11, monumented with a sandstone, 14x14x2 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T19S	R25E
S3	S2
S10	S11
1963	

Bury original stone cor. alongside iron post.

Land, gently rolling.
Soil, rocky clay sand.
Timber, scattered juniper.
Undergrowth, shadscale.

From the cor. of secs. 1, 2, 11 and 12.

N. 89°53' W., bet. secs. 2 and 11.

Over gently rolling land through scattered juniper timber with shadscale undergrowth. Desc. 80 ft. over gentle NW. slope.

- 14.00 Wash, 25 lks. wide, 4 ft. deep, drains NW.
- 21.60 Wash, 20 lks wide, 3 ft. deep, drains NW.
- 40.08 The ¼ sec. cor. of secs. 2 and 11, monumented with a sandstone, 18x10x6 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 15 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T19S	R25E
¼	S2
	S11
1963	

Bury original stone cor. alongside iron post.

Dependent Resurvey of the Subdivision, T. 19 S., R. 25 E.

CHAINS

N. 89°50'W., beginning new measurement.

Desc. 55 ft. over gentle NW. slope.

2.35 Wash, 15 lks. wide, 2 ft. deep, drains NW.

24.65 Underground Natrual Gas line, bears N. 32°10' E. and S. 32°10' W.

32.65 Road, unimproved, bears NE. and SW.

40.03 The cor. of secs: 2, 3, 10 and 11.

Land, gently rolling.
Soil, sandy clay.
Timber, scattered juniper.
Undergrowth, shadscale.

N. 0°27' W., bet. secs. 2 and 3.

Over gently rolling land through scattered juniper timber with shadscale undergrowth. Desc. 50 ft. over gently rolling NW. slope.

4.30 Wash, 15 lks. wide, 3 ft. deep, drains W.

40.17 The 1/2 sec. cor. of secs. 2 and 3, monumented with a sandstone, 16x10x3 ins., dimly mkd. and set in a mound of stone, 2 ft. base, 1 1/2 ft. high.

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 10 ins. in the ground to bedrock, and in a mound of stone, 3 1/2 ft. base to top, with brass cap mkd.

T19S R25E

1/2
S3 | S2
1963

Bury original stone cor. alongside iron post.

N. 0°25'W., beginning new measurement.

Desc. 15 ft. over gentle NE. slope.

2.05 Wash, 20 lks. wide, 3 ft. deep, drains NE.

10.30 Wash, 10 lks. wide, 2 ft. deep, drains NE.

20.20 Wash, 25 lks. wide, 5 ft. deep, drains E., Asc. 20 ft. over gentle SE. slope.

24.40 Center line of U. S. Highway 50 and 6, bears N. 20°30' E. and S. 20°30' W.

26.20 Telephone line, parallels highway.

38.40 Wash, 10 lks. wide, 1 ft. deep, drains SE.

Dependent Resurvey of the Subdivision, T. 19 S., R. 25 E.

CHAINS

40.17

The cor. of secs. 2 and 3, on the N. bdy. of the Tp., monumented with a 2½ in. iron post, set, mkd. and witnessed as described in the official record of the 1960 resurvey of the S. bdy., T. 18 S., R. 25 E.

Land, gently rolling.
Soil, clay.
Timber, scattered juniper.
Undergrowth, shadscale.

From the true point for the cor. of secs. 3, 4, 33 and 34, on the S. bdy. of the Tp., hereinbefore described.

N. 0°15' E., bet. secs. 33 and 34.

Over rolling land through shadscale and greasewood undergrowth.

1.70

Westwater Wash, 80 lks. wide, 5 ft. deep, drains SE., asc. 90 ft. over SE. slope.

16.00

Top of ascent, slopes E., desc. 50 ft. over NE. slope.

20.20

Gravel Road to Westwater, bears irregularly NW. and SE.

31.25

Wash, 30 lks. wide, 6 ft. deep, drains irregularly S., asc. 30 ft. along E. slope.

40.19

The ¼ sec. cor. of secs. 33 and 34, monumented with a sandstone, 24x8x5 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T19S R25E

½
S33|S34
1963

Bury original stone cor. alongside iron post.

North, beginning new measurement.

Over nearly level land.

6.30

Wash, 20 lks. wide, 6 ft. deep, drains irregularly S.

11.00

Same wash, drains irregularly S.

16.80

Same wash, drains irregularly S. from NW., asc. 85 ft. over SW. slope.

23.00

Top of ascent, bears NW. and SE., thence along gentle W. slope.

36.25

Power line, bears NE. and SW.

40.15

The cor. of secs. 27, 28, 33 and 34, monumented with a sandstone, 15x4x3 ins., set, mkd. and witnessed as described in the official record.

Dependent Resurvey of the Subdivision, T. 19 S., R. 25 E.

CHAINS

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 14 ins. in the ground to bedrock, and in a mound of stone, 3 ft base to top, with brass cap mkd.

T19S R25E

S28 | S27

S33 | S34

1963

Bury original stone cor. alongside iron post.

Land, rolling desert.

Soil, rocky clay.

No timber.

Undergrowth, shadscale and greasewood.

From the cor. of secs. 26, 27, 34 and 35.

West, bet. secs. 27 and 34.

Over rolling desert land through scattered juniper timber with shadscale and greasewood undergrowth. Desc. 85 ft. over rolling NW. slope.

14.95 Road, unimproved, bears NW. and SE.

22.20 Wash, 20 lks. wide, 2 ft. deep, drains NW.

40.18 The ¼ sec. cor. of secs. 27 and 34, monumented with a sandstone, 20x15x3 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 16 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T19S R25E

¼ S27

S45

1963

Bury original stone cor. alongside iron post.

West, beginning new measurement.

Desc. 130 ft. over gentle W. slope. Leave timber.

11.40 Trail road, bears NW. and SE.

23.50 Wash, 30 lks. wide, 5 ft. deep, drains S., asc. 110 ft. over E. slope.

31.85 Top of ascent, bears N. and S., desc. 25 ft. over gentle W. slope.

40.04 The cor. of secs. 27, 28, 33 and 34.

Land, rolling desert.

Soil, clay.

Timber, scattered juniper E. portion; no timber W. portion.

Undergrowth, shadscale and greasewood.

Dependent Resurvey of the Subdivision, T. 19 S., R. 25 E.

CHAINS

N. 0°04' W., bet. secs. 27 and 28.

Over gently rolling desert land through shadscale undergrowth. Desc. 20 ft. over gentle NW. slope.

13.00 Gravel road to Westwater, bears S. 15° W. and N. 15° E.

19.50 Wash, 15 lks. wide, 4 ft. deep, drains SW.

20.80 Wash, 10 lks. wide, 4 ft. deep, drains SW., asc. 25 ft. over gentle SE. slope.

40.12 The 1/4 sec. cor. of secs. 27 and 28, monumented with a sandstone, 16x14x5 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.

T19S R25E

1/4

S28|S27

1963

Deposit glass at base of iron post and bury original stone cor. alongside iron post.

N. 0°03' W., beginning new measurement.

Asc. 25 ft. along gentle E. slope.

2.10 Wash, 10 lks. wide, 2 ft. deep, drains E.

10.90 Water storage dam, bears E. and W., 12 ft. high, 200 ft. wide.

40.12 The cor. of secs. 21, 22, 27 and 28, monumented with a sandstone, 20x10x4 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, and in a collar of stone to top, with brass cap mkd.

S21|S22

S28|S27

1963

Bury original stone cor. alongside iron post.

Land, gently rolling.

Soil, clay.

No timber.

Undergrowth, shadscale.

Dependent Resurvey of the Subdivision, T19S., R. 25 E.

CHAINS

CHAINS

From the cor. of secs. 22, 23, 26 and 27.
 S. 89°58' W., bet. secs. 22 and 27.
 Over rolling desert land through dense juniper timber with shadscale undergrowth. Desc. 100 ft. over W. slope.

14.20 Head of small canyon, drains NW., desc. 70 ft. along N. slope.

40.09 The 1/2 sec. cor. of secs. 22 and 27, monumented with a sandstone, 24x14x8 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., over an (X) on solid sandstone, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T19S R25E
 1/2 S22
 S27
 1963

Bury original stone cor. in mound of stone alongside iron post.

S. 89°54' W., beginning new measurement.

Desc. 45 ft. along N. slope.

20.10 Small draw, drains SW., desc. 40 ft. over gentle W. slope. Leave timber.

34.10 Power line, bears N. 5°10' W. and S. 5°10' E.

35.20 Gravel road to Westwater, bears S. 5°10' E. and N. 5°10' W.

40.18 The cor. of secs. 21, 22, 27 and 28.

Land, rolling.
 Soil, rocky clay.
 Timber, dense juniper E. portion; no timber W. portion.
 Undergrowth, shadscale.

N. 0°17' W., bet. secs. 21 and 22.

Over gently rolling desert land through shadscale and sagebrush undergrowth.

20.90 Wash, 15 lks. wide, 6 ft. deep, drains S. 10° W.

28.30 Wash, 30 lks. wide, 5 ft. deep, drains irregularly S.

32.40 Same wash, drains irregularly S. from irregularly N.

40.38 The 1/2 sec. cor. of secs. 21 and 22, monumented with a sandstone, 20x10x4 ins., set, mkd. and witnessed as described in the official record.

Dependent Resurvey of the Subdivision, T. 19 S., R. 25 E.

GRADES

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T19S R25E

$$\begin{array}{c} \frac{1}{2} \\ \hline \text{S21} | \text{S22} \\ \hline 1963 \end{array}$$

Bury original stone cor. alongside iron post, and raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

Cor. located 40 lks. E. of wash, drains irregularly S.

N. $0^{\circ}11'$ E., beginning new measurement.

- 1.90 Water storage dam, bears E. and W., 12 ft. high, 150 ft. wide.
- 11.00 Wash, 40 lks. wide, 8 ft. deep, drains irregularly S.
- 30.60 Wash, 15 lks. wide, 2 ft. deep, drains SW.
- 39.50 Wash, 15 lks. wide, 2 ft. deep, drains SW.
- 39.87 The cor. of secs. 15, 16, 21 and 22, monumented with a sandstone, $20 \times 14 \times 3$ ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 22 ins. in the ground, and in a collar of stone to top, with brass cap mkd.

T19S R25E

$$\begin{array}{c} \text{S16} | \text{S15} \\ \hline \text{S21} | \text{S22} \\ \hline 1963 \end{array}$$

Bury original stone cor. alongside iron post, and deposit glass at base of iron post.

Land, gently rolling.
Soil, clay.
No timber.
Undergrowth, shadscale.

From the cor. of secs. 14, 15, 22 and 23.

S. $89^{\circ}53'$ W., bet. secs. 15 and 22

Over gently rolling W. slope of mesa through dense juniper timber with scattered shadscale undergrowth. Desc. 135 ft. over gentle SW. slope.

- 29.90 Wash, 25 lks. wide, 3 ft. deep, drains SW.

- 40.29 The $\frac{1}{2}$ sec. cor. of secs. 15 and 22, monumented with a sandstone, $16 \times 12 \times 4$ ins., set, mkd. and witnessed as described in the official record.

At the cor. point

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 12 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T19S R25E

$\frac{1}{2}$ $\frac{S15}{S22}$
1963

Bury original stone cor. alongside iron post.

S. $89^{\circ}53'$ W., beginning new measurement.

Desc. 170 ft. over gentle W. slope.

- 6.00 Leave dense timber, bears N. and S., enter dense shade-scale undergrowth.
- 28.40 Power line, bears N. $1^{\circ}55'$ E. and S. $1^{\circ}55'$ W.
- 32.95 Gravel road to Westwater, bears N. and S.
- 39.50 Wash, 15 lks. wide, 2 ft. deep, drains SW.
- 40.04 The cor. of secs. 15, 16, 21 and 22.

Land, gently rolling.

Soil, clay.

Timber, dense juniper E. portion; no timber W. portion. Undergrowth, shade-scale.

N. $0^{\circ}05'$ W., bet. secs. 15 and 16.

Over nearly level desert land through shade-scale undergrowth.

- 19.20 Wash, 1.00 ch. wide, 12 ft. deep, drains S. 30° W.
- 28.85 Underground Natural Gas line, bears N. $38^{\circ}40'$ E., and S. $38^{\circ}40'$ W.
- 40.11 Point for the $\frac{1}{2}$ sec. cor. of secs. 15 and 16 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T19S R25E

$\frac{1}{2}$
S16|S15
1963

Deposit glass at base of iron post.

Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

- 51.75 Wash, 1.00 ch. wide, 10 ft. deep, drains S. 30° E.
- 54.00 Center line of U. S. Highway 50 and 6, bears N. $28^{\circ}20'$ E. and S. $28^{\circ}20'$ W.
- 60.55 Wash, 10 lks. wide, 5 ft. deep, drains S. 30° W.

Dependent Resurvey of the Subdivision, T. 19 S., R. 25 E.

CREAKS

- 71.25 Wash, 1.00 ch. wide, 12 ft. deep, drains S. 30° W.
- 80.22 The cor. of secs. 9, 10, 15 and 16, monumented with a sandstone, 18x4x4 ins., set, mkd. and witnessed as described in the official record.
- At the cor. point
- Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
- T19S R25E
 $\frac{S9}{S16} | \frac{S10}{S15}$
 1963
- Bury original stone cor. alongside iron post, and deposit glass at base of iron post,
- Land, nearly level.
 Soil, clay.
 No timber.
 Undergrowth, shadscale.
-
- From the cor. of secs. 10, 11, 14 and 15.
- S. 89°52' W., bet. secs. 10 and 15.
- Over rolling land through dense juniper timber with shadscale undergrowth. Desc. 75 ft. over gentle SW. slope.
- 25.80 Wash, 20 lks. wide, 1 ft. deep, drains SW.
- 32.35 Underground Natural Gas line, bears N. 29°25' E. and S. 29°25' W.
- 40.16 The ½ sec. cor. of secs. 10 and 15, monumented with a sandstone, 18x10x4 ins., set, mkd. and witnessed in the official record.
- At the cor. point
- Set an iron post, 30 ins. long, 2½ ins. diam., 15 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.
- T19S R25E
 $\frac{1}{2} \frac{S10}{S15}$
 1963
- Bury original stone cor. alongside iron post.
-
- S. 89°46' W., beginning new measurement.
- Desc. 105 ft. over gentle SW. slope.
- 1.20 Wash, 15 lks. wide, 1 ft. deep, drains SW.
- 14.90 Power line, bears NE. and SW,
- 26.25 Center line of U. S. Highway 50 and 6, bears N. 28°45' E. and S. 28°45' W. Leave timber.

Dependent Resurvey of the Subdivision, T. 19 S., R. 25 E.

CHAINS	EXPLAN
36.30	Power line, bears SE. and NW.
37.95	Wash, 50 lks. wide, 8 ft. deep, drains S.
40.31	The cor. of secs. 9, 10, 15 and 16.
	<p>Land, gently rolling W. slope of mesa. Soil, rocky clay. Timber, dense juniper E. portion; no timber W. portion. Undergrowth, shadscale.</p>
	<p>N. 0°04' W., bet. secs. 9 and 10.</p>
	<p>Over nearly level land through shadscale undergrowth.</p>
12.40	Wash, 20 lks. wide, 6 ft. deep, drains SE., enter scattered juniper timber.
21.80	Wash, 30 lks. wide, 3 ft. deep, drains SE., asc. 25 ft. over gentle SW. slope.
40.12	<p>The ¼ sec. cor. of secs. 9 and 10, monumented with a sandstone, 18x9x4 ins., set, mkd. and witnessed as described in the official record.</p>
	<p>At the cor. point</p>
	<p>Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 3½ ft. base to top, with brass cap mkd.</p>
	<p>T19S R25E ¼ S9 S10 1963</p>
	<p>Bury original stone cor. alongside iron post.</p>
	<p>N. 0°02' W., beginning new measurement.</p>
	<p>Asc. 65 ft. over gentle SW. slope.</p>
40.11	<p>The cor. of secs. 3, 4, 9 and 10, monumented with a sandstone, 14x8x5 ins., set. and mkd. and witnessed as described in the official record.</p>
	<p>At the cor. point</p>
	<p>Set an iron post, 30 ins. long, 2½ ins. diam., 14 ins. in the ground to bedrock, and in a mound of stone, 3½ ft. base to top, with brass cap mkd.</p>
	<p>T19S R25E S4 S3 S9 S10 1963</p>
	<p>Bury original stone cor. alongside iron post.</p>
	<p>Land, gently rolling. Soil, rocky clay. Timber, scattered juniper. Undergrowth, shadscale.</p>

Dependent Resurvey of the Subdivision, T. 19 S., R. 25 E.

CHAINS

From the cor. of secs. 2, 3, 10 and 11.

S. 89°36' W., bet. secs. 3 and 10.

Over gently rolling land through shadscale and sagebrush undergrowth. Desc. 25 ft. over gentle W. slope.

6.80 Wash, 10 lks. wide, 2 ft. deep, drains irregularly W.

8.17 Fence, bears N. 10° E. and S. 10° W.

13.60 Wash, 15 lks. wide, 3 ft. deep, drains NW., asc. 15 ft. over gentle NE. slope.

17.50 Wash, 10 lks. wide, 3 ft. deep, drains NE.

23.70 Fence, bears N. 20°30' E. and S. 20°30' W.

24.65 Center line of U.S. Highway 50 and 6, bears N. 20°30' E. and S. 20°30' W.

25.55 Telephone line, parallels highway.

32.30 Top of ascent, bears NW. and SE., desc. 10 ft. over gentle SW. slope.

40.29 The $\frac{1}{4}$ sec. cor. of secs. 3 and 10, monumented with a sandstone, 9x9x4 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, and in a collar of stone to top, with brass cap mkd.

T19S R25E

$$\frac{1}{4} \frac{S3}{S10}$$

1963

Bury original stone cor. alongside iron post.

S. 89°45' W., beginning new measurement.

Desc. 10 ft. over gentle SW. slope.

5.85 Wash, 10 lks. wide, 2 ft. deep, drains irregularly W.

13.25 Same wash, drains S., asc. 25 ft. over E. slope.

29.91 Road, unimproved, on low ridge, bears N. and SE., desc. 30 ft. over gentle SW. slope.

33.35 Road, unimproved, bears NW. and SE.

40.24 The cor. of secs. 3, 4, 9 and 10.

Land, gently rolling.

Soil, rocky clay.

No timber.

Undergrowth, shadscale and sagebrush.

Dependent Resurvey of the Subdivision, T. 19 S., R. 25 E.

CHAINS

N. 0°09' W., bet. secs. 3 and 4.
Over gently rolling land through shadscale undergrowth.
asc. 85 ft. over gentle SW. slope.

40.12 The 1/4 sec. cor. of secs. 3 and 4, monumented with a sandstone, 16x12x5 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, and in a collar of stone to top, with brass cap mkd.

T19S R25E
1/4
S4 | S3
1963

Bury original stone cor. alongside iron post.

N. 0°10' W., beginning new measurement.

Asc. 5 ft. over gentle SW. slope.

3.65 Road, unimproved, on low ridge, bears NW. and SE., desc. 80 ft. over NE. slope.

40.64 The cor. of secs. 3 and 4, on the N. bdy. of the Tp., monumented with a 2 1/2 in. iron post, set, mkd. and witnessed as described in the official record of the 1960 resurvey of the S. bdy., T. 18 S., R. 25 E.

Land, gently rolling.
Soil, rocky clay.
No timber.
Undergrowth, shadscale.

From the cor. of secs. 4, 5, 32 and 33, on the S. bdy. of the Tp., hereinbefore described.

N. 0°32' W., bet. secs. 32 and 33.

Over rolling land through shadscale and greasewood undergrowth.

4.00 Wash, 30 lks. wide, 6 ft. deep, drains E., asc. 35 ft. over S. slope.

13.50 Rim of small, flat knoll, slopes E.

19.20 Wash, 15 lks. wide, 4 ft. deep, drains E.

23.00 Rim of knoll, slopes NE., desc. 25 ft. over NE. slope.

30.60 Wash, 10 lks. wide, 3 ft. deep, drains SE., thence over nearly level land.

40.06 The 1/4 sec. cor. of secs. 32 and 33, monumented with a sandstone, 12x11x3 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Dependent Resurvey of the Subdivision, T. 19 S., R. 25 E.

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T19S R25E

¾
S32|S33
1963

Bury original stone cor. alongside iron post, and dig pits, 18x18x12 ins., N. and S. of cor., 3 ft. dist.

N. 0°32' E., beginning new measurement.

- 2:60 Westwater Wash, 2:00 chs. wide, 8 ft. deep, drains irregularly SE.
- 21.80 Westwater Wash, drains irregularly SW. from irregularly N.
- 32.90 Westwater Wash, drains irregularly S. from irregularly NW.
- 40.13 Point for the cor. of secs. 28, 29, 32 and 33 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone to top, with brass cap mkd.

T19S R25E

S29|S28
S32|S33
1963

Deposit glass at base of iron post.

Land, rolling S. portion; nearly level N. portion.
Soil, sandy clay.
No timber.
Undergrowth, shadscale and greasewood.

From the cor. of secs. 27, 28, 33 and 34.

S. 89°57' W., bet. secs. 28 and 33.

Over rolling land through shadscale undergrowth. Desc. 30 ft. over W. slope.

- 5.90 Gravel road to Westwater, bears N. 15° E. and S. 15° W.
- 8.80 Wash, 30 lks. wide, 6 ft. deep, drains S., asc. 75 ft. over SE. slope.
- 21.00 Wash, 15 lks. wide, 4 ft. deep, drains S.
- 40.20 The ¼ sec. cor. of secs. 28 and 33, monumented with a sandstone, 12x9x2 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

Dependent Resurvey of the Subdivision, T. 29 S., R. 25 E.

CHAINS	
	<p style="text-align: center;">T19S R25E $\frac{1}{2}$ <u>S28</u> S33 1963</p> <p>Bury original stone cor. alongside iron post.</p> <hr/> <p>S. 89°51' W., beginning new measurement. Asc. 50 ft. over E. slope.</p>
8.30	Ridge, bears N. and S., desc. 30 ft. over NW. slope.
11.00	Small draw, drains SW., asc. 20 ft. over SE. slope.
19.50	Spur, slopes SW., desc. 150 ft. over NW. slope.
32.00	Base of descent, thence over nearly level land.
40.13	The cor. of secs. 28, 29, 32 and 33.
	<p>Land, rolling. Soil, sandy clay. No timber. Undergrowth, shadscale.</p>
	<p>N. 0°03' E., bet. secs. 28 and 29.</p> <p>Over nearly level land through shadscale and greasewood undergrowth.</p>
19.90	Wash, 15 lks. wide, 3 ft. deep, drains SW.
39.10	Wash, 10 lks. wide, 1 ft. deep, drains SW.
40.13	The $\frac{1}{2}$ sec. cor. of secs. 28 and 29, monumented with a sandstone, 14x10x5 ins., set, mkd. and witnessed as described in the official record.
	<p>At the cor. point</p> <p>Set an iron post, 30 ins. long, 2$\frac{1}{2}$ ins. diam., 24 ins. in the ground, and in a collar of stone to top, with brass cap mkd.</p> <p style="text-align: center;">T19S R25E $\frac{1}{2}$ S29 S28 1963</p> <p>Bury original stone cor. alongside iron post.</p> <hr/> <p>N. 0°03' E., beginning new measurement.</p> <p>Asc. 30 ft. over S. slope.</p>
1.90	Point of spur, slopes SW., desc. 20 ft. over NW. slope.
5.30	Wash, 10 lks. wide, 2 ft. deep, drains SW., asc. 30 ft. over SE. slope.

Dependent Resurvey of the Subdivision, T. 19 S., R. 25 E.

CRANS

- 9.90 Low ridge, bears NE. and SW., asc. 30 ft. over gently rolling land.
- 10.90 Underground Natural Gas line, bears N. 41°37' E. and S. 41°37' W.
- 19.50 Centerline of U. S. Highway 50 and 6, bears N. 45°45' E. and S. 45°45' W.
- 33.00 Wash, 15 lks. wide, 3 ft. deep, drains SE.
- 40.13 The cor. of secs. 20, 21, 28 and 29, monumented with a sandstone, 14x12x3 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone to top, with brass cap mkd.

T19S R25E
S20 | S21
 S29 | S28
 1963

Bury original stone cor. alongside iron post.

Land, nearly level S. portion; gently rolling N. portion.

Soil, clay.

No timber.

Undergrowth, shadscale and greasewood S. portion; shadscale N. portion.

From the cor. of secs. 21, 22, 27 and 28.

S. 89°56' W., bet. secs. 21 and 28.

Over rolling land through shadscale undergrowth.

- 2.60 Wash, 40 lks. wide, 6 ft. deep, drains S.; asc. 100 ft. over E. slope.
- 34.95 Ridge, bears N. and S., desc. 20 ft. over W. slope.
- 40.11 The ¼ sec. cor. of secs. 21 and 28, monumented with a sandstone, 16x10x3 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground, and in a collar of stone to top, with brass cap mkd.

T19S R25E
 ¼ S21
 S28
 1963

Bury original stone cor. alongside iron post.

Dependent Resurvey of the Subdivision. T. 18 S., R. 11 E.

CHAINS		REMARKS
	S. 89°55' W., beginning new measurement.	OR. R
	Desc. 90 ft. over gentle SW. slope.	
7.30	Wash, 10 lks. wide, 1 ft. deep, drains SW.	
18.95	Underground Natural Gas line, bears N. 22°30' E. and S. 22°30' W.	
22.80	Wash, 15 lks. wide, 4 ft. deep, drains SW.	
24.95	Centerline of U. S. Highway 50 and 6, bears N. 22°30' E. and S. 22°30' W.	
37.00	Wash, 15 lks. wide, 5 ft. deep, drains SW.	
40.04	The cor. of secs. 20, 21, 28 and 29.	
	Land, gently rolling. Soil, clay. No timber. Undergrowth, shadscale.	
	N. 0°01' E., bet. secs. 20 and 21.	
	Over gently rolling land through shadscale undergrowth.	
17.00	Wash, 15 lks. wide, 2 ft. deep, drains W.	
29.00	Wash, 20 lks. wide, 3 ft. deep, drains W.	
37.70	Wash, 20 lks. wide, 4 ft. deep, drains SW.	
40.13	The $\frac{1}{4}$ sec. cor. of secs. 20 and 21, monumented with a sandstone, 16x14x3 ins., set, mkd. and witnessed as described in the official record.	
	At the cor. point	
	Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 18 ins. in the ground to bedrock, and in a collar of stone to top, with brass cap mkd.	
	T198 R25E ↓ S20 S21 1963	
	Bury original stone cor. alongside iron post.	
	North, beginning new measurement.	
	Asc. 50 ft. over gently rolling land.	
1.60	Wash, 10 lks. wide, 2 ft. deep, drains SW.	
34.40	Wash, 15 lks. wide, 2 ft. deep, drains SW.	
40.08	The cor. of secs. 16, 17, 20 and 21, monumented with a sandstone, 14x12x3 ins., set, mkd. and witnessed as described in the official record.	

Dependent Resurvey of the Subdivision, T. 19 S., R. 25 E.

CRAINS

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground to bedrock, and in a collar of stone to top, with brass cap mkd.

T19S R25E
 S17|S16
 S20|S21
 1963

Bury original stone cor. alongside iron post.

Land, gently rolling.
 Soil, clay.
 No timber.
 Undergrowth, shadscale.

From the cor. of secs. 15, 16, 21 and 22.

S. 89°52' W., bet. secs. 16 and 21.

Over gently rolling land through shadscale undergrowth. Asc. 35 ft. over gentle NE. slope.

- 6.75 Wash, 50 lks. wide, 8 ft. deep, drains irregularly S.
- 14.15 Underground Natural Gas line, bears N. 28°45' E. and S. 28°45' W.
- 29.20 Centerline of U. S. Highway 50 and 6, bears N. 28°45' E. and S. 28°45' W.
- 40.06 The ¼ sec. cor. of secs. 16 and 21, monumented with a sandstone, 12x10x6 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone to top, with brass cap mkd.

T19S R25E
 ¼ S16
 S21
 1963

Bury original stone cor. alongside iron post.

S. 89°58' W. , beginning new measurement.

Asc. 10 ft. over gentle NE. slope.

- 1.80 Top of ascent, bears NW. and SE., desc. 125 ft. over gentle SW. slope.
- 22.55 Wash, 15 lks. wide, 2 ft. deep, drains SW.
- 30.05 Wash, 10 lks. wide, 2 ft. deep, drains SW.
- 40.04 The cor. of secs. 16, 17, 20 and 21.

Dependent Resurvey of the Subdivision, T. 19 S., R. 25 E.

CHAINS

Land, gently rolling.
Soil, clay.
No timber.
Undergrowth, shadscale.

N. 0°01' W., bet. secs. 16 and 17.

Over gently rolling land through shadscale undergrowth.

5.40 Wash, 15 lks. wide, 3 ft. deep, drains W.

10.40 Wash, 15 lks. wide, 4 ft. deep, drains W.

28.00 Wash, 20 lks. wide, 4 ft. deep, drains W.

40.13 The $\frac{1}{4}$ sec. cor. of secs. 16 and 17, monumented with a sandstone, 12x10x3 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 12 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T19S R25E

$\frac{1}{4}$
S17|S16
1963

Bury original stone cor. alongside iron post.

N. 0°02' W., beginning new measurement.

6.80 Wash, 10 lks. wide, 1 ft. deep, drains W.

22.00 Wash, 10 lks. wide, 1 ft. deep, drains W.

40.11 The cor. of secs. 8, 9, 16 and 17, monumented with a sandstone, 16x14x3 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 14 ins. in the ground to bedrock, and in a collar of stone to top, with brass cap mkd.

T19S R25E

$\frac{1}{4}$
S8|S9
S17|S16
1963

Bury original stone cor. alongside iron post.

Land, gently rolling.
Soil, clay.
No timber.
Undergrowth, shadscale.

From the cor. of secs. 9, 10, 15 and 16.

S. 89°58' W., bet. secs. 9 and 16.

Dependent Resurvey of the Subdivision, T. 19 S., R. 25 E.

CHAINS

Over rolling land through shadscale undergrowth. Asc.
80 Ft. over SE. slope.

- 2.10 Wash, 40 lks. wide, 6 ft. deep, drains SE.
- 15.60 Trail road, bears N. and S.
- 24.25 Low ridge, bears NE. and SW., desc. 30 ft. over NW.
slope.
- 29.35 Wash, 15 lks. wide, 2 ft. deep, drains SW.; asc. 65 ft.
over SE. slope.
- 34.35 Ridge, bears NE. and SW., desc. 35 ft. over NW. slope.
- 39.98 The $\frac{1}{2}$ sec. cor. of secs. 9 and 16, monumented with a
sandstone, 16x14x10 ins., set, mkd. and witnessed as
described in the official record.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 22 ins. in
the ground, and in a collar of stone to top, with brass
cap mkd.

T19S R25E
S9
 $\frac{1}{2}$ S16
1963

Bury original stone cor. alongside iron post.

S. $89^{\circ}56'$ W., beginning new measurement.

Desc. 90 ft. over NW. slope.

- 23.40 Wash, 15 lks. wide, 3 ft. deep, drains SW.; asc. 15 ft.
over SE. slope.
- 27.45 Low ridge, bears NE. and SW., desc. 20 ft. over NW. slope.
- 31.10 Wash, 20 lks. wide, 2 ft. deep, drains SW., asc. 35 ft.
over gentle SE. slope.
- 40.04 The cor. of secs. 8, 9, 16 and 17.
- Land, rolling.
Soil, clay.
No timber.
Undergrowth, shadscale.

N. $0^{\circ}05'$ W., bet. secs. 8 and 9.

Over rolling land through shadscale undergrowth.

- 4.00 Wash, 10 lks. wide, 2 ft. deep, drains W.
- 10.20 Wash, 10 lks. wide, 2 ft. deep, drains W.
- 14.20 Wash, 15 lks. wide, 2 ft. deep, drains SW.
- 40.14 The $\frac{1}{2}$ sec. cor. of secs. 8 and 9, monumented with a
sandstone, 18x12x3 ins., set, mkd. and witnessed as de-
scribed in the official record.

Dependent Resurvey of the Subdivision, T. 19 S., R. 25 E.

CHAINS

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 16 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T19S R25E

$$\frac{1}{2}$$

S8	S9
1963	

Bury original stone cor. alongside iron post.

N. $0^{\circ}02'$ W., beginning new measurement.

- 4.80 Draw, 30 ft. deep, drains SW.
- 24.20 Wash, 20 lks. wide, 4 ft. deep, drains SW.
- 39.85 Wash, 10 lks. wide, 3 ft. deep, drains SW.
- 40.04 The cor. of secs. 4, 5, 8 and 9, monumented with a sandstone, 14x12x6 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, and in a collar of stone to top, with brass cap mkd.

T19S R25E

S5	S4
S8	S9
1963	

Bury original stone cor. alongside iron post.

From this cor., a steel fence post, 5 ft. above ground, bears S. $26^{\circ}29'$ E., 1.17 chs. dist., with aluminum plate mkd.

T18S R25E

S5	S4
S8	S9

Land, rolling.
Soil, clay.
No timber.
Undergrowth, shadscale.

From the cor. of secs. 3, 4, 9 and 10.

S. $89^{\circ}58'$ W., bet. secs. 4 and 9.

Over rolling land through shadscale undergrowth.

- 10.60 Wash, 20 lks. wide, 3 ft. deep, drains irregularly S.
- 38.10 Wash, 10 lks. wide, 2 ft. deep, drains S.
- 40.02 Point for the $\frac{1}{4}$ sec. cor. of secs. 4 and 9 at proportionate dist.; there is no remaining evidence of the original cor.

Dependent Resurvey of the Subdivision, T. 19 S., R. 25 E.

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T19S R25E

½ $\frac{S4}{S9}$

1963

From this cor., a steel fence post, 4 ft. above ground bears N. 83°01' E., 0.78 chs. dist., with aluminum plate mkd.

½ sec. 4-9, T18S R25E

Desc. 90 ft. over W. slope.

- 59.20 Wash, 60 lks. wide, 12 ft. deep, drains S., asc. 30 ft. over E. slope.
- 60.20 Low ridge, bears N. and S., desc. 35 ft. over gentle SW. slope.
- 68.85 Wash, 15 lks. wide, 2 ft. deep, drains SW.
- 79.85 Wash, 10 lks. wide, 3 ft. deep, drains SW.
- 80.04 The cor. of secs. 4, 5, 8 and 9.

Land, rolling.
Soil, clay.
No timber.
Undergrowth, shadscale.

N. 0°24' W., bet. secs. 4 and 5.

Over rolling desert land through shadscale undergrowth.

- 19.60 Wash, 25 lks. wide, 6 ft. deep, drains SW.
- 29.30 Wash, 15 lks. wide, 3 ft. deep, drains SW.
- 40.08 The ½ sec. cor. of secs. 4 and 5, monumented with a sandstone, 14x10x4 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 14 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T19S R25E

½ $\frac{S5}{S4}$

1963

Bury original stone cor. alongside iron post.

Dependent Resurvey of the Subdivision, T. 19 S., R. 25 E.

CHAINS

2411010

N. 0°30' W., beginning new measurement.

- 0.60 Bottom of small draw, 30 ft. deep, drains SW., asc. 55 ft. over gentle SW. slope.
- 6.00 Wash, 25 lks. wide, 6 ft. deep, drains SW.
- 9.80 Wash, 20 lks. wide, 6 ft. deep, drains SW.
- 27.80 Top of ascent, slopes W., desc. 50 ft. over NW. slope.
- 33.00 Wash, 30 lks. wide, 4 ft. deep, drains SW., asc. 60 ft. over SE. slope.
- 40.61 The cor. of secs. 4 and 5, on the N. bdy. of the Tp., monumented with a 2½ in. iron post, set, mkd. and witnessed as described in the official record of the 1960 resurvey of the S. bdy., T. 18 S., R. 25 E.

Land, rolling desert.
 Soil, clay.
 No timber,
 Undergrowth, shadscale.

From the cor. of secs. 5, 6, 31 and 32, on the S. bdy. of the Tp., hereinbefore described.

N. 0°21' W., bet. secs. 31 and 32.

Over nearly level land through shadscale undergrowth.

- 9.50 Wash, 20 lks. wide, 4 ft. deep, drains SE.
- 21.70 Wash, 15 lks. wide, 2 ft. deep, drains SE.
- 28.20 Wash, 25 lks. wide, 3 ft. deep, drains SE.
- 40.25 The ¼ sec. cor. of secs. 31 and 32, monumented with a sandstone, 14x12x3 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone to top, with brass cap mkd.

T19S R25E

¼
 S31|S32
 1963

Bury original stone cor. alongside iron post.

N. 0°01' W., beginning new measurement.

- 13.65 Underground Natural Gas line, bears N. 45°40' E. and S. 45°40' W.
- 20.85 Centerline of U. S. Highway 50 and 6, bears N. 45°15' E. and S. 45°15' W.
- 26.00 Wash, 25 lks. wide, 4 ft. deep, drains SE.

Dependent Resurvey of the Subdivision, T. 19 S., R. 25 E.

CHAINS

28.10

Trail road, bears NW. and SE.

40.09

The cor. of secs. 29, 30, 31 and 32, monumented with a broken sandstone, 18x10x2 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone to top, with brass cap mkd.

T19S R25E
S30 | S29
 S31 | S32
 1963

Bury original stone cor. alongside iron post.

Land, nearly level desert.
 Soil, clay.
 No timber.
 Undergrowth, shadscale.

From the cor. of secs. 28, 29, 32 and 33.

N. 89°47' W., bet. secs. 29 and 32.

Over nearly level land through dense greasewood undergrowth.

7.50

Westwater Wash, 2.00 chs. wide, 6 ft. deep, drains irregularly SE.

14.00

Leave greasewood and level land, asc. 65 ft. over gentle NE. slope.

34.80

Top of ascent, slopes N., desc. 25 ft. over gentle NW. slope.

40.15

The ¼ sec. cor. of secs. 29 and 32, monumented with a sandstone, 14x12x3 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground, and in a collar of stone to top, with brass cap mkd.

T19S R25E
 ¼ S29
 S32
 1963

Bury original stone cor. alongside iron post.

S. 89°55' W., beginning new measurement.

Desc. 10 ft. over NW. slope.

3.20

Wash, 20 lks. wide, 4 ft. deep, drains NE., asc. 40 ft. over gently rolling SE. slope.

Dependent Resurvey of the Subdivision, T. 19 S., R. 25 E

CHAINS

- 10.35 Underground Natural Gas line, bears S. 37° W. and N. 37° E.
- 20.65 Centerline of U. S. Highway 50 and 6, bears N. 47°30' E. and S. 47°30' W.
- 23.70 Wash, 10 lks. wide, 3 ft. deep, drains irregularly E.
- 32.10 Wash, 15 lks. wide, 3 ft. deep, drains NE.
- 40.14 The cor. of secs. 29, 30, 31 and 32.

Land, gently rolling.
Soil, clay.
No timber.
Undergrowth, dense greasewood E. portion; shadscale W. portion.

- N. 89°57' W., bet. secs. 30 and 31.

Over gently rolling land through shadscale undergrowth. Asc. 75 ft. over gently rolling E. slope.
- 22.60 Top of low knoll, desc. 15 ft. over gentle W. slope.
- 40.23 Point for the 1/4 sec. cor. of secs. 30 and 31 at proportionate dist., there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.

T19S R25E
1/4 S30
S31
1963

Deposit glass at base of iron post.

Asc. 45 ft. over gentle E. slope.
- 40.90 Wash, 15 lks. wide, 8 ft. deep, drains SE.
- 64.00 Low ridge, bears N. and S., desc. 65 ft. over gentle W. slope.
- 75.50 Wash, 15 lks. wide, 6 ft. deep, drains S.
- 79.72 The cor. of secs. 30 and 31, on the W. bdy. of the Tp., monumented with a 2 ins. iron post, set, mkd. and witnessed as described in the official record of the resurvey of the E. bdy., T. 19 S., R. 24 E.

Land, gently rolling.
Soil, clay.
No timber.
Undergrowth, shadscale.

From the cor. of secs. 29, 30, 31 and 32.

N. 0°01' W., bet. secs. 29 and 30.

Dependent Resurvey of the Subdivision, T. 19 S., R. 25 E.

DRAINS

- Over gently rolling land through shadscale undergrowth.
- 5.15 Wash, 10 lks. wide, 3 ft. deep, drains SE.
- 20.65 Wash, 30 lks. wide, 6 ft. deep, drains SE.
- 31.45 Wash, 10 lks. wide, 2 ft. deep, drains E.
- 39.25 Wash, 20 lks. wide, 7 ft. deep, drains E.
- 40.14 The $\frac{1}{4}$ sec. cor. of secs. 29 and 30, monumented with a sandstone, 14x12x2 ins., set, mkd. and witnessed as described in the official record.
- At the cor. point
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, and in a collar of stone to top, with brass cap mkd.
- T19S R25E
 $\frac{1}{4}$
S30 | S29
1963
- Bury original stone cor. alongside iron post.
-
- N. $0^{\circ}05'$ W., beginning new measurement.
- 2.30 Trail road, bears E. and W.
- 18.80 Wash, 20 lks. wide, 3 ft. deep, drains E.
- 26.35 Wash, 10 lks. wide, 4 ft. deep, drains E.
- 32.10 Wash, 15 lks. wide, 4 ft. deep, drains E.
- 38.30 Westwater Wash, 2.00 chs. wide, 6 ft. deep, drains irregularly SE.
- 40.08 Point for the cor. of secs. 19, 20, 29 and 30, at proportionate dist., falls in Westwater Wash, and deemed unsafe to perpetuate. There is no remaining evidence of the original cor.
- Point selected for the witness cor. of secs. 19, 20, 29 and 30, hereinafter described.
- Land, gently rolling.
Soil, clay.
No timber.
Undergrowth, shadscale, with dense willows and tamarack along Westwater Wash.
-
- From the cor. of secs. 20, 21, 28 and 29.
- S. $89^{\circ}57'$ W., bet. secs. 20 and 29.
- Over rolling land through shadscale undergrowth. Desc. 65 ft. over gentle W. slope.
- 20.15 Wash, 30 lks. wide, 3 ft. deep, drains S.; asc. 35 ft. over NE. slope.
- 23.15 Low ridge, bears N. and S., desc. 30 ft. over W. slope.

Dependent Resurvey of the Subdivision, T. 19 S., R. 25 E.

CHAINS


32.45

Gravel road to Westwater canyon, bears NW. and SE., thence over nearly level land. Enter medium dense greasewood and tamarack.

39.69

Point selected for the witness 1/4 sec. cor. of secs. 20 and 29.

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, and in a collar of stone to top, with brass cap mkd.



40.19

Point for the 1/4 sec. cor. of secs. 20 and 29 at proportionate dist. falls in wash, 3.50 chs. wide, 12 ft. deep, drains SE., and deemed unsafe to perpetuate. There is no remaining evidence of the original cor.

70.30

Westwater Wash, 2.00 chs. wide, 6 ft. deep, drains S. 75° E., from irregularly W.

80.38

True point for the cor. of secs. 19, 20, 29 and 30.

Land, gently rolling E. portion; nearly level W. portion.
Soil, clay.
No timber.
Undergrowth, shadscale, greasewood, and tamarack.

N. 89°54' W., bet. secs. 19 and 30.

Over rolling land through shadscale, greasewood, and tamarack undergrowth.

5.00

Westwater Wash, drains irregularly E. from NW., asc. 50 ft. over NE. slope.

8.90

Point of spur, slopes NE., desc. 10 ft. over gentle NW. slope. Leave greasewood and tamarack undergrowth.

24.20

Wash, 10 lks. wide, 2 ft. deep, drains N., asc. 55 ft. over NE. slope.


32.30

Low ridge, bears N. and S., desc. 10 ft. over gentle W. slope.

40.18

Point for the 1/4 sec. cor. of secs. 19 and 30 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, and in a collar of stone to top, with brass cap mkd.



Deposit glass at base of iron post.

Asc. 10 ft. over E. slope.

Dependent Resurvey of the Subdivision, T. 19 S., R. 25 E.

CHAINS

40.70 Low ridge, bears N. and S., desc. 40 ft. over W. slope.

47.65 Wash, 20 lks. wide, 5 ft. deep, drains N., asc. 20 ft. over E. slope.

79.71 The cor. of secs. 19 and 30, on the W. bdy. of the Tp., monumented with a 2 in. iron post, set, mkd. and witnessed as described in the official record of the resurvey of the E. bdy., T. 19 S., R. 24 E.

Land, rolling.

Soil, clay.

No timber.

Undergrowth, tamarack and greasewood E. 9.00 chs.; shadscale W. 71.00 chs.

From the true point for the cor. of secs. 19, 20, 29 and 30.

N. 0°14' E., bet. secs. 19 and 20.

Over nearly level land through dense greasewood undergrowth.

2.61 Point selected for the witness cor. of secs. 19, 20, 29 and 30.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T19S R25E	
S19	S20
S30	S29
W ↓ C	
1963	

32.00 Base of bench, bears NW. and SE. Leave greasewood, enter shadscale undergrowth, asc. 60 ft. over SW. slope.

40.08 The ½ sec. cor. of secs. 19 and 20, monumented with a sandstone, 16x14x3 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone to top, with brass cap mkd.

T19S R25E	
½	
S19	S20
1963	

Bury original stone cor. alongside iron post.

N. 0°03' W., beginning new measurement.

6.80 Wash, 10 lks. wide, 2 ft. deep, drains SE.

11.30 Low ridge, bears NW. and SE., desc. 20 ft. over NE. slope.

15.60 Gravel road to Westwater canyon, bears NW. and SE.

Dependent Resurvey of the Subdivision, T. 19 S., R. 25 E.

CHAINS	
23.60	Wash, 10 lks. wide, 2 ft. deep, drains SE., asc. 20 ft. over SE. slope.
27.50	Top of ascent, slopes E., desc. 15 ft. along E. slope.
36.50	Wash, 15 lks. wide, 2 ft. deep, drains E.
40.16	The cor. of secs. 17, 18, 19 and 20, monumented with a sandstone, 18x14x3 ins., set, mkd. and witnessed as described in the official record.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone to top, with brass cap mkd.
	T19S R25E <u>S18</u> S17 S19 S20 1963
	Bury original stone cor. alongside iron post.
	Land, nearly level S. portion; rolling N. portion. Soil, sandy clay. No timber. Undergrowth, dense greasewood S. portion; shadscale N. portion.
	From the cor. of secs. 16, 17, 20 and 21.
	S. 89°59' W., bet. secs. 17 and 20.
	Over rolling land through shadscale undergrowth. Desc. 15 ft. over gentle W. slope.
6.20	Wash, 30 lks. wide, 6 ft. deep; drains S., asc. 50 Ft. over SE. slope.
15.00	Top of ascent, slopes S., desc. 30 ft. over SW. slope.
17.50	Head of small draw, drains SE., asc. 30 ft. over E. slope.
19.50	Ridge, bears N. and S., desc. 15 ft. over gentle W. slope.
40.10	Point for the ¼ sec. cor. of secs. 17 and 20 at proportionate dist.; there is no remaining evidence of the original cor.
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone to top, with brass cap mkd.
	T19S R25E ¼ <u>S17</u> S20 1963
41.35	Desc. 70 ft. over W. slope.
50:20	Wash, 2.00 chs. wide, 10 ft. deep, drains irregularly S.; asc. 70 ft. over E. slope.

Dependent Resurvey of the Subdivision, T. 19 S., R. 25 E.

CHAINS

- 74.30 Ridge, bears N. and S., desc. 35 ft. over W. slope,
- 78.00 Wash, 15 lks. wide, 3 ft. deep, drains S., asc. 15 ft. over E. slope.
- 80.20 The cor. of secs. 17, 18, 19 and 20.

Land, rolling.
Soil, clay.
No timber.
Undergrowth, shadscale.

- N. 89°57' W., bet. secs. 18 and 19.

Over gently rolling land through shadscale undergrowth. Asc. 30 ft. over gentle E. slope.
- 8.40 Ridge, bears N. and S., desc. 60 ft. over W. slope.
- 15.45 Gravel road to Westwater Canyon, bears NW. and SE., thence over nearly level land, enter dense greasewood.
- 18.85 Westwater Wash, 2.00 chs. wide, 8 ft. deep, drains irregularly SE., asc. 40 ft. over NE. slope.
- 40.24 Point for the ¼ sec. cor. of secs. 18 and 19 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone to top, with brass cap mkd.

T19S R25E

¼ $\frac{S18}{S19}$

1963
- 47.55 Asc. 10 ft. over gentle E. slope. Leave greasewood.
- 47.55 Ridge, bears N. and S., desc. 30 ft. over SW. slope.
- 51.45 Wash, 30 lks. wide, 5 ft. deep, drains SE., asc. 40 ft. over gentle NE. slope.
- 79.96 The cor. of secs. 18 and 19, on the W. bdy. of the Tp., monumented with a 2 in. iron post, set, mkd. and witnessed as described in the official record of the resurvey of the E. bdy., T. 19 S., R. 24 E.

Land, rolling,
Soil, clay.
No timber.
Undergrowth, shadscale, greasewood, and rabbit brush.

- From the cor. of secs. 17, 18, 19 and 20.

North, bet. secs. 17 and 18.

Over gently rolling land through shadscale undergrowth; asc. 55 ft. over SW. slope.

Dependent Resurvey of the Subdivision, T. 19 S., R. 25 E.

CHAINS	
2.00	Wash, 15 lks. wide, 2 ft. deep, drains SE.
16.00	Low ridge, bears W. and SE., thence over nearly level land.
24.00	Wash, 10 lks. wide, 2 ft. deep, drains SE.
28.80	Low ridge, bears E. and W., desc. 10 ft. over gentle NE. slope.
31.85	Wash, 20 lks. wide, 2 ft. deep, drains SE., asc. 10 ft. over gentle SE. slope.
36.00	Wash, 20 lks. wide, 2 ft. deep, drains E., asc. 10 ft. over S. slope.
40.14	Point for the $\frac{1}{4}$ sec. cor. of secs. 17 and 18 at proportionate dist.; there is no remaining evidence of the original cor.
	Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, and in a collar of stone to top, with brass cap mkd.
	<p style="text-align: center;">T19S R25E $\frac{1}{4}$ S18 S17 1963</p>
	Asc. 5 ft. over S. slope.
41.75	Top of ascent, bears E. and W., thence over nearly level land.
44.95	Wash, 15 lks. wide, 2 ft. deep, drains SE.
49.75	Wash, 20 lks. wide, 4 ft. deep, drains SE.
55.35	Wash, 15 lks. wide, 2 ft. deep, drains SE.
66.75	Wash, 15 lks. wide, 1 ft. deep, drains SE.
71.95	Wash, 10 lks. wide, 2 ft. deep, drains E.
75.95	Wash, 20 lks. wide, 2 ft. deep, drains SE.
80.28	The cor. of secs. 7, 8, 17 and 18, monumented with a sandstone, 16x14x3 ins., set, mkd. and witnessed as described in the official record.
	At the cor. point
	Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, and in a collar of stone to top, with brass cap mkd.
	<p style="text-align: center;">T19S R25E S7 S8 S18 S17 1963</p>
	Bury original stone cor. alongside iron post.
	Land, gently rolling. Soil, clay. No timber. Undergrowth, shadscale.

Dependent Resurvey of the Subdivision, T. 19 S., R. 25 E.

GRAINS

From the cor. of secs. 8, 9, 16 and 17.

S. 89°57' W., bet. secs. 8 and 17.

Over rolling land through shadscale undergrowth. Desc. 35 ft. over W. slope.

9.10 Wash, 50 lks. wide, 10 ft. deep, drains irregularly S., asc. 30 ft. over E. slope.

11.75 Low ridge, bears N. and S., desc. 30 ft. over W. slope.

17.40 Wash, 40 lks. wide, 12 ft. deep, drains irregularly S., asc. 40 ft. over E. slope.

26.65 Ridge, bears N. and S., desc. 15 ft. over gentle W. slope.

40.12 Point for the 1/2 sec. cor. of secs. 8 and 17 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, with brass cap mkd.

T19S R25E
S8
1/2 S17
1963

Set a sandstone, 18x8x6 ins., N. of cor.

Desc. 60 ft. over W. slope.

52.70 Wash, 50 lks. wide, 10 ft. deep, drains irregularly S., asc. 30 ft. over SE. slope.

57.70 Wash, 10 lks. wide, 2 ft. deep, drains SE.

62.25 Wash, 50 lks. wide, 6 ft. deep, drains irregularly S., asc. 45 ft. over E. slope.

67.70 Low ridge, bears N. and S., desc. 25 ft. over W. slope.

72.00 Wash, 10 lks. wide, 2 ft. deep, drains SE., asc. 40 ft. over SE. slope.

80.24 The cor. of secs. 7, 8, 17 and 18.

Land, rolling.
Soil, clay.
No timber.
Undergrowth, shadscale.

N. 89°54' W., bet. secs. 7 and 18.

Over rolling land through shadscale undergrowth. Asc. 55 ft. over SE. slope.

13.20 Ridge, bears N. and S., desc. 25 ft. over NW. slope.

16.45 Wash, 10 lks. wide, 3 ft. deep, drains SW., asc. 20 ft. over SE. slope.

20.20 Ridge, bears NE. and SW., desc. 40 ft. over NW. slope.

Dependent Resurvey of the Subdivision, T. 19 S., R. 25 E.

CHAINS

26.15 Wash, 10 lks. wide, 4 ft. deep, drains SW., asc. 35 ft. over SE. slope.

28.20 Point of spur, slopes S., desc. 20 ft. over SW. slope.

40.18 The 1/4 sec. cor. of secs. 7 and 18, monumented with a wood stake, 1x2x6 ins., badly deteriorated, in a small mound of stone.

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, and in a collar of stone to top, with brass cap mkd.

T19S R25E
S7
1/4 S18
1963

Bury original wood stake alongside iron post.

N. 89°56' W., beginning new measurement.

1.20 Wash, 1.00 chs wide, 8 ft. deep, drains irregularly S., asc. 45 ft. over E. slope.

14.10 Ridge, bears N. and SE., desc. 40 ft. over W. slope.

16.80 Gravel road to Westwater Canyon, bears irregularly NW. and SE., thence over nearly level land.

19.90 Enter dense tamarack along Westwater Wash.

36.80 Westwater Wash, 2.00 chs. wide, 4 ft. deep, drains irregularly SE. from NW.

39.94 Point for the cor. of secs. 7 and 18, reestablished at record course and dist. from the cor. of secs. 12 and 13, T. 19 S., R. 24 E. falls in Westwater Wash, and deemed unsafe to perpetuate, There is no remaining evidence of the original cor.

Point selected for the witness cor. of secs. 7 and 18, bears S. 0°04' E., 0.63 chs. dist.

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T19S
R24S R25E
WC
S12 | S7
| S18
1963

Land, rolling E. portion; nearly level W. portion.
Soil, clay E. portion; sandy W. portion.
No timber.
Undergrowth, shadscale E. portion; dense tamarack and sagebrush W.

Dependent Resurvey of the Subdivision, T. 19 S., R. 25 E.

From the cor. of secs. 7, 8, 17 and 18.

N. 0°06' W., bet. secs. 7 and 8.

Over gently rolling land through shadscale undergrowth.

3.10 Wash, 15 lks. wide, 3 ft. deep, drains SE.

10.00 Wash, 10 lks. wide, 2 ft. deep, drains E.

20.30 Wash, 15 lks. wide, 3 ft. deep, drains E.

27.20 Wash, 15 lks. wide, 3 ft. deep, drains SE.

40.28 The 1/2 sec. cor. of secs. 7 and 8, monumented with a sandstone, 12x10x6 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, and in a collar of stone to top, with brass cap mkd.

T19S R25E

1/2
S7|S8
1963

Bury original stone cor. alongside iron post.

N. 0°07' W., beginning new measurement.

Over rolling land.

2.10 Wash, 10 lks. wide, 2 ft. deep, drains SE.

17.70 Wash, 15 lks. wide, 3 ft. deep, drains SE.

25.60 Wash, 10 lks. wide, 1 ft. deep, drains SE.

40.04 The cor. of secs. 5, 6, 7 and 8, monumented with a sandstone, 16x14x4 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.

T19S R25E

S6|S5
S7|S8
1963

Bury original stone cor. alongside iron post, and deposit glass at base of iron post.

Land, rolling.
Soil, clay.
No timber.
Undergrowth, shadscale.

Dependent Resurvey of the Subdivision, T. 19 S., R. 25 E.

CHAINS

From the cor. of secs. 4, 5, 8 and 9.

S. 89°58' W., bet. secs. 5 and 8.

Over rolling land through shadscale undergrowth.

11.95 Wash, 30 lks. wide, 5 ft. deep, drains SW.

39.05 Wash, 1.50 chs. wide, 12 ft. deep, drains S.

40.13 Point for the 1/4 sec. cor. of secs. 5 and 8 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 15 ins. in the ground to bedrock, and in a mound of stone, 3 1/2 ft. base to top, with brass cap mkd.

T19S R25E

1/4 S5
S8

1963

60.05 Wash, 15 lks. wide, 2 ft. deep, drains SE.

80.26 The cor. of secs. 5, 6, 7 and 8.

Land, rolling.
Soil, clay.
No timber.
Undergrowth, shadscale.

N. 89°51' W., bet. secs. 6 and 7.

Over rolling land through shadscale undergrowth.

31.80 Wash, 40 lks. wide, 6 ft. deep, drains S.

40.14 Point for the 1/4 sec. cor. of secs. 6 and 7 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, and in a collar of stone to top, with brass cap mkd.

T19S R25E

1/4 S6
S7

1963

45.85 Telephone line, bears N. 42°50' E. and S. 42°50' W.

75.65 Gravel road to Westwater canyon, bears N. 8°45' E. and S. 8°35' W.

79.71 The cor. of secs. 6 and 7, on the W. bdy. of the Tp., monumented with a 2 in. iron post, set, mkd. and witnessed as described in the official record of the resurvey of the E. bdy., T. 19 S., R. 24 E.

Land, rolling.
Soil, clay.
No timber.
Undergrowth, shadscale.

Dependent Resurvey of the Subdivision, T. 19 S., R. 25 E.

CHAINS

From the cor. of secs. 5, 6, 7 and 8.
 N. 0°19' W., bet. secs. 5 and 6.

Over nearly level land through shadscale undergrowth.

40.11 Point for the $\frac{1}{4}$ sec. cor. of secs. 5 and 6 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T19S R25E
 $\frac{1}{4}$
 S6|S5
 1963

No accessories available.

45.30 Wash, 15 lks. wide, 2 ft. deep, drains NW.

49.40 Telephone line, bears N. 42°55' E. and S. 42°55' W.

64.75 Wash, 15 lks. wide, 3 ft. deep, drains SW.

80.69 The cor. of secs. 5 and 6, on the N. bdy. of the Tp., monumented with a 2 $\frac{1}{2}$ in. iron post, set, mkd. and witnessed as described in the official record of the 1960 resurvey of the S. bdy., T. 18 S., R. 25 E.

Land, nearly level.
 Soil, clay.
 No timber.
 Undergrowth, shadscale.

General Description

Township 19 South, Range 25 East, is located about 12 miles northeast of Cisco, Utah. The northwest portion is rolling desert land with shadscale undergrowth and no timber. The southeast portion is rolling mountains and mesa land covered with scattered to dense scrub juniper timber. The soil is sandy clay in the southeast portion and clay in the northwest portion. There is a small intermittent stream of alkali water in Westwater Wash that drains southeast through the southwest portion of the township. No other water was noted. U. S. Highway 50 and 6, bears northeast and southwest through the western portion of the township. There are other numerous unimproved roads throughout the township. The El Paso Gas Company has an underground pipeline that parallels the highway. The drainage is generally to the southeast. This area is good winter range for sheep. Harley Dome is located in the northeast portion of section 10, and consists of a service station and one house. No other habitations in the township. There are some mining claims in the northeast portion of section 34, with a little mining of some sort of soil conditioner.

CRANE

CERTIFICATE OF SURVEY

I, Glen B. Hatch, HEREBY CERTIFY upon honor th
in pursuance of special instructions bearing date of the 21 day of September, 1964
I have dependently resurveyed the East boundary, the South boundary, and
the subdivisional lines of Township 19 South, Range 25 East

of the Salt Lake Meridian, in the State of Utah, which
are represented in the foregoing field notes as having been executed by me and under my direction
and that said survey has been made in strict conformity with said special instructions, the Manual
of Instructions for the Survey of the Public Lands of the United States, and in specific manner
described in the foregoing field notes.

January 20, 1964
(Date)

Glen B. Hatch
(Cadastral Surveyor)

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

SUBMITTED FOR APPROVAL
Date OCT 27 1965

BUREAU OF LAND MANAGEMENT
Washington, D. C.

The foregoing field notes of the dependent resurvey of the East boundary, the
South boundary, and the subdivisional lines of Township 19 South, Range
25 East

executed by Glen B. Hatch, Cadastral Surveyor
having been critically examined and found correct, are hereby approved.

JAN 19 1966
(Date)

E. L. Huntington
(Chief, Division of Engineering)

CERTIFICATE OF TRANSCRIPT

I CERTIFY That the foregoing transcript of the field notes of the above-described surveys in
, is a true copy of the original field notes.

(Date)

(Chief, Division of Engineering)

Blank

Page

Blank

Page

Public Law 859
(October 3, 1958)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

209

FIELD NOTES

OF THE

DEPENDENT RESURVEY

OF THE

SOUTH BOUNDARY (SALT LAKE BASE LINE)

WEST BOUNDARY

AND

SUBDIVISIONAL LINES

AND

PARTIAL MEANDERS OF THE GREEN RIVER

OF

TOWNSHIP 1 NORTH, RANGE 25 EAST

Of the SALT LAKE Meridian,

In the State of UTAH

EXECUTED BY

FRED R. CHAPPELL

CADASTRAL SURVEYOR

Under special instructions dated MAY 25, 19 62, which provided for the surveys

included under Group Number 456, approved JUNE 8, 1962,

and assignment instructions dated MAY 3, 19 63.

Survey commenced JULY 1, 19 63

Survey completed OCTOBER 16, 19 63

DEPT. OF THE INTERIOR
BUR OF LAND MGMT

1966 FEB 18 AM 11 22.2

RECEIVED
STATE & LAND OFFICE
SALT LAKE CITY, UTAH

INDEX DIAGRAM

Township _____, Range _____

13 6 22	24 5 33	34 4 42	43 8 55	58 9 57	1
13 7 20	20 8 31	31 9 41	41 10 53	55 11 53	12
12 18 18	19 17 29	30 16 39	40 15 50	52 14 51	13
11 19 17	18 20 28	28 21 37	37 22 47	49 23 48	24
10 30 15	16 29 26	27 28 35	36 27 45	46 26 45	25
9 31 2	14 32 3	25 33 4	34 34 6	44 35 8	26

Meanders of Left Bank of Green River on pages 59 through 63.

Township 1 North, Range 25 East

The North boundary was surveyed by A. Jessen in 1898 and re-surveyed in 1900 by Fred R. Chappell. The South boundary (Salt Lake Base Line) was surveyed by A. Jessen in 1898. The East boundary (Utah-Colorado State Line) was surveyed by R. J. Reeves in 1879, retraced by A. Jessen in 1898 in connection with Utah surveys, retraced on the north 3 miles by R. Clark in 1909 in connection with Colorado surveys, retraced on the south 3 miles by T. Crawford in 1937 in connection with Colorado surveys, and concurrently retraced with the monumentation of corners found, by Fred R. Chappell in connection with Utah surveys. The West boundary was surveyed by A. D. Ferron in 1878 and retraced on the north 2 miles by A. Jessen in 1898. The subdivisional lines were surveyed by A. Jessen in 1898. The meanders of the Green River were surveyed by A. Jessen in 1898.

The following field notes are those of the dependent resurvey of the South and West boundaries and the subdivisional lines and a partial meander of the Green River of Township 1 North, Range 25 East.

The survey was executed with a W. & L. E. Gurley transit #591190 and a Buff transit #33384. Each is equipped with a full vertical circle and improved Smith-type telescopic solar attachment, and conforms to the standard instrumental specifications of the Bureau of Land Management. The instruments were maintained in precise adjustment throughout the progress of the survey.

The directions of the lines were determined by the solar transit method.

The geographic position of the southeast corner of the township is in latitude 40°46'16.7" and longitude 109°02'52.7" W, as determined from section line ties made to USCGS triangulation station "UCOLWY" which is identical to the northeast corner of T. 1 N., R. 25 E., Utah.

The magnetic declination was read at a number of stations throughout the township and the average of these readings was found to be 16' E.

The present meanders of the Green River shown in the following field notes were scaled from U.S.G.S. quadrangle sheets Swallow Canyon and Warren Draw as provided by the special instructions for Group 456, Utah. The changes of the positions of the river which have taken place since the original survey of 1898 are the result of erosive and accretive action rather than evulsive, so that ownership of the shore lands have moved with the changing river position.

Dependent Resurvey of the South Boundary
(Salt Lake Base Line) of
Township 1 North, Range 25 East

Reestablishment of the Survey Executed
by A. Jessen in 1898.

Beginning at the standard cor. of Tp. 1 N., Rs. 24 and 25 E., which is an "X" marked on a quartzite boulder, 20x12x12 ft, 6 notches to N., E., and W. and BC to S.

At the cor. point

Set an iron post, 20 ins. long, 1 in. in diam., 6 ins. in a hole drilled in solid rock, with brass cap mkd.

Dependent Resurvey of the South Boundary
(Salt Lake Base Line) of Township 1 North, Range 25 East

CHAINS

T1N
R24E R25E
SC
S36 | S31
T1S
1963

S. 89°56' E., along the S. bdy. of sec. 31.

Over mountainous land through scattering juniper, pinon and mahogany; desc. 280 ft. over E. slope.

7.88

The closing cor. of secs. 5 and 6, T. 1 S., R. 25 E., monumented with sandstone, 14x12x10 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 4 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T1N
S6 | S5
C C
T1S R25E
1963

Deposit the original stone alongside the iron post.

Thence by triangulation.

Desc. 100 ft. over E. slope.

14.00

Ravine, drains S.; asc. 340 ft. over SW. slope.

40.38

The standard ¼ sec. cor. of sec. 31, monumented with sandstone, 21x6x6 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., on solid rock and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T1N R25E
SC
¼ S31
T1S
1963

Deposit the original stone alongside the iron post.

S. 89°50' E., beginning new measurement.

Asc. 20 ft. over SW. slope.

4.00

Ridge, bears N. and S.; desc. 125 ft. over SE. slope.

7.39

Point for the N. ¼ sec. cor. of sec. 5, T. 1 S., R. 25 E. at midpoint bet. closing cors.

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

Dependent Resurvey of the South Boundary
(Salt Lake Base Line) of Township 1 North, Range 25 East

T1N
1/4 S5
T1S R25E
1963

Desc. 400 ft. over SE. slope.

32.00 Spur, projects S. 80° E.; desc. 120 ft. over NE. slope.

39.91 The standard cor. of secs. 31 and 32, monumented with a sandstone, 24x9x6 ins., set, mkd. and witnessed as described in the official record.

From which the original bearing trees:

- A pine, 8 ins. diam., bears N. 66°40' E., 23 lks. dist., mkd. T1N R25E S32 SC BT.
- A pine, 10 ins. diam., bears N. 77°55' W., 35 lks. dist., mkd. T1N R25E S31 SC. BT.

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 4 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T1N R25E
SC
S31 | S32
T1S
1963

Deposit the original stone alongside the iron post.

Land, mountainous.
Soil, rocky.
Timber, juniper and pinon.
Undergrowth, sagebrush.

N. 89°56' E., along the S. bdy. of sec. 32.

Over mountainous land through dense juniper and pinon; desc. 185 ft. over NE. slope.

7.37 The closing cor. of secs. 4 and 5, T. 1 S., R. 25 E., monumented with a sandstone, 15x14x6 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T1N
S5 | S4
C C
T1S R25E
1963

Deposit the original stone alongside the iron post.

Desc. 60 ft. over NE. slope.

24.30 Begin triangulation; desc. 200 ft. over NE. slope.

40.12 The standard 1/4 sec. cor. of sec. 32, which is an "X" mkd. on a boulder, 3x2x1 ft.

Dependent Resurvey of the South Boundary
(Salt Lake Base Line) of Township 1 North, Range 25 East.

CHAINS

From which the original bearing tree:

A pine, 8 ins. diam., bears N. 74°30' W.,
5 lks. dist., mkd. $\frac{1}{2}$ SC 32 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., on solid sandstone and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T1N R25E
SC
 $\frac{1}{2}$ S32
T1S
1963

S. 89°57' E., beginning new measurement.

Desc. 20 ft. over NE. slope.

7.55 Point for the N. $\frac{1}{4}$ sec. cor. of sec. 4, T. 1 S., R. 25 E. at midpoint bet. closing cors.

Set an iron post, 30 ins. long, 2½ ins. diam., 4 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T1N
 $\frac{1}{2}$ S4
T1S R25E
1963

Thence by triangulation; desc. 40 ft. over NE. slope.

11.00 Draw, drains SE. approximately 3.00 chs., thence E., irregularly desc. 120 ft. over broken S. slope.

31.20 Dirt road, graded, bears NE. and SW.

39.90 Crouse Creek, 6 ins. deep, 8 lks. wide, drains N. about 1 ch., thence NE. irregularly.

40.23 The standard cor. of secs. 32 and 33, monumented with a sandstone, 10x10x6 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T1N R25E
SC
S32|S33
T1S
1963

Deposit the original stone alongside the iron post.

Land, mountainous.

Soil, rocky.

Timber, juniper, pinon, pine and mahogany.

Undergrowth, sagebrush.

S. 89°48' E., along the S. bdy. of sec. 33.

Dependent Resurvey of the South Boundary
(Salt Lake Base Line) of Township 1 North, Range 25 East

CHAINS

Over rolling land through scattering juniper and heavy sagebrush; asc. gradually over S. slope.

7.62 The closing cor. of secs. 3 and 4, T. 1 S., R. 25 E., monumented with a sandstone, 14x10x8 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, with brass cap mkd.

T1N
S4 | S3
C C
T1S R25E
1963

Deposit the original stone alongside the iron post.

Asc. 105 ft. over broken N. slope.

22.60 Dirt road, unimproved, bears NW. and SE. approximately 1.00 ch., thence E., irregularly.

23.90 Wash, 3 ft. deep, 10 lks. wide, drains N.

40.30 The standard ¼ sec. cor. of sec. 33, monumented with a sandstone, 20x8x4 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T1N R25E
SC
¼ S33
T1S
1963

Deposit the original stone alongside the iron post.

East, beginning new measurement.

Asc. 30 ft. over N. slope through heavy sagebrush.

7.77 Point for the N. ¼ sec. cor. of sec. 3, T. 1 S., R. 25 E. at midpoint bet. closing cors.

Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T1N
¼ S3
T1S R25E
1963

16.00 Spring branch, intermittent stream, course NW. from E.; enter Marshall Draw; thence along bottom of wide draw; asc. 80 ft.

35.80 Leave bottom of draw; continue along S. side of wash.

**Dependent Resurvey of the South Boundary
(Salt Lake Base Line) of Township 1 North, Range 25 East**

CHAINS

40.16

The standard cor. of secs. 33 and 34, monumented with a sandstone, 20x12x2 ins., set, mkd. and witnessed as described in the official record.

At the cor point

Set an iron post, 30 ins. long, 2½ ins diam, 18 ins. in the ground to bedrock, and in a mound of stone, 2 ft. base to top, with brass cap mkd.

T1N R25E

SC

S33|S34

T1S

1963

Deposit the original stone alongside the iron post.

Land, rolling.

Soil, sandy loam and rocky.

Timber, scattering juniper and pinon.

Undergrowth, sagebrush.

S. 89°57' E., along the S. bdy. of sec. 34.

Over rolling and broken land through heavy sagebrush; asc. 40 ft. over N. slope approximately 2.00 chs. S. of bottom of draw.

8.06

The closing cor. of secs. 2 and 3, T. 1 S., R. 25 E., monumented with a sandstone, 20x8x4 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.

T1N

S3|S2

C C

T1S R25E

1963

Deposit the original stone alongside the iron post.

Thence by traverse around dense cottonwood grove.

40.12

End of traverse.

The standard ¼ sec. cor. of sec. 34, monumented with a sandstone, 28x14x2 ins., set, mkd. and witnessed as described in the official record.

From which the original bearing tree:

A pine, 12 ins. diam., bears N. 75°30' W.,
40 lks. dist., mkd. SC ¼ S34 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

Dependent Resurvey of the South Boundary
(Salt Lake Base Line) of Township 1 North, Range 25 East

CHAINS

T1N R25E
SC
1/4 S34
T1S
1963

Deposit the original stone alongside the iron post.

S. 89°53' E., beginning new measurement.

Desc. 15 ft over S slope, along N. side of wash.

4.00 Bottom of draw, drains W., irregularly from NE; asc. gradually over NW. slope.

8.03 Point for the N. 1/4 sec. cor. of sec. 2, T. 1 S., R. 25 E., at midpoint bet. closing cors.

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.

T1N
1/4 S2
T1S R25E
1963

raise a mound of stone, 2 ft. base, 1 1/2 ft. high, S. of cor.

Asc. 95 ft. over NW. slope.

9.60 Dirt road, unimproved, bears NW. and SE.

13.40 Small draw, drains NW.

21.30 Spur, projects NW.; desc. 20 ft. over NE. slope.

33.90 Spring branch, intermittent stream, course NW.; asc. 95 ft. over W. slope.

40.16 The standard cor. of secs. 34 and 35, monumented with a sandstone, 22x15x4 ins., set, mkd. and witnessed as described in the official record.

From which the original bearing trees:

- A pine, 14 ins. diam., bears N. 72°55' E., 18 lks. dist., mkd. T1N R25E S35 BT.
- A pine, 10 ins. diam., bears N. 52°30' W., 34 lks. dist., mkd. T1N R25E S34 BT.

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 4 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T1N R25E
SC
S34 | S35
T1S
1963

Deposit the original stone alongside the iron post.

Land, rolling and broken.

Soil, rocky.

Timber, juniper, pinon and scattering pine; cottonwood in bottom of draw.

Dependent Resurvey of the South Boundary
(Salt Lake Base Line) of Township 1 North, Range 25 East

CHAINS

START

Undergrowth, sagebrush.

East, along the S. bdy. of sec. 35.

Over rolling to mountainous land; asc. 60 ft. over W. slope, changing to S. slope, through dense juniper and pinon.

7.96 The closing cor. of secs. 1 and 2, T. 1 S., R. 25 E., monumented with a sandstone, 18x8x2 ins., set, mkd. and witnessed as described in the official record.

From which the original bearing trees:

A juniper, 12 ins. diam., bears S. 49° E.,
36 lks. dist., mkd. T1S R25E CC S1 BT.
A pine, 18 ins. diam., bears S. 87° W.,
21 lks. dist., mkd. T1S R25E CC S2 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 4 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T1N
S2 | S1
C C
T1S R25E
1963

Deposit the original stone alongside the iron post.

Asc. 90 ft. over S. slope, changing to SW. slope.

40.46 The standard ¼ sec. cor. of sec. 35, monumented with a sandstone, 20x8x10 ins., set and mkd. as described in the official record; there is no remaining evidence of the original bearing trees.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T1N R25E
SC
¼ S35
T1S
1963

Deposit the original stone alongside the iron post.

S. 89°59' E., beginning new measurement.

Asc. 175 ft. over SW. slope through dense juniper and pinon.

7.99 Point for the N. ¼ sec. cor. of sec. 1 at proportionate dist.

Set an iron post, 30 ins. long, 2½ ins. diam., 2 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

Dependent Resurvey of the South Boundary
(Salt Lake Base Line) of Township 1 North, Range 25 East

CHAINS

T1N
1/2 S1
T1S R25E
1963

Asc. 25 ft. over SW. slope.

9.10 Spur, projects S.; thence by triangulation.

Desc. 180 ft. over SE. slope.

25.00 Bottom of desc., bears NE. and SW.; leave timber; thence along gentle S. slope through heavy sagebrush.

39.27 The standard closing cor. of Tp. 1 N., and Tp. 1 S., R. 25 E., monumented with a sandstone, 24x9x4 ins., set, mkd. and witnessed as described in the official record. I destroy all marks on the stone and remark to read "AM".

The above cor. is set in a barbed wire fence, bearing N. and S.

39.37 Intersect the Utah-Colorado State Line.

Point for the standard closing cor. of sec. 35.

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.

T1N U C
R25E T O
SC A L
S35 H O
CC ----- R
T1S A
D
O
1963

Deposit the original stone alongside the iron post.

From this cor., the 261 Mi. Cor. on the Utah-Colorado State Line, bears S. 0°26' W., 20.37 chs. dist., and is monumented with an iron post, 2 1/2 ins. diam., set, mkd. and witnessed as described in the field notes of the 1963 retracement of the Utah-Colorado State Line.

Land, mountainous.
Soil, sandy loam and rocky.
Timber, juniper, pinon and scattering pine.
Undergrowth, sagebrush.

Dependent Resurvey of the West Boundary
of Township 1 North, Range 25 East

Reestablishment of the Survey Executed
by A. D. Ferron in 1878.

From the standard cor. of Tp. 1 N., Rs. 24 and 25 E., previously described.

N. 0°08' W., bet. secs. 31 and 36.

Over mountainous land through dense mahogany; desc. 615 ft. over top of rocky spur, projecting N.; by triangulation.

Dependent Resurvey of the West Boundary of Township 1 North, Range 23

CHAINS

13.47 End of triangulation; point of spur; thence over N. slope.

30.00 Leave timber, slope changes to NW.

39.67 The 1/2 sec. cor. of secs. 31 and 36, monumented with a quartzite stone, 20x8x6 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T1N
R24E R25E
1/2
S36 | S31
1963

Deposit the original stone alongside the iron post.

N. 0°18' W., beginning new measurement.

Desc. 90 ft. over NW. slope.

17.00 Draw, drains W.; asc. 230 ft. over SW. slope.

27.50 Trail road, bears NE. and SW.

40.12 The cor. of secs. 25, 30, 31 and 36, monumented with a quartzite boulder, 4x2x2 ft. above the ground, mkd. and witnessed as described in the official record on spur, projects W.

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., on solid rock and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T1N
R24E R25E
S25 | S30
S36 | S31
1963

Land, mountainous.
Soil, rocky.
Timber, mahogany, juniper and pinon.
Undergrowth, sagebrush.

N. 0°02' E., bet. secs. 25 and 30.

By triangulation.

Desc. 240 ft. over sagebrush covered NW. slope.

36.00 Trail road, bears NE. and SW.

40.56 The 1/2 sec. cor. of secs. 25 and 30, monumented with a quartzite stone, 15x10x5 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Dependent Resurvey of the West Boundary of Township 1 North, Range 25 East

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T1N
R24E R25E
¼
S25 | S30
1963

Deposit the original stone alongside the iron post.

N. 0°29' W., beginning new measurement.

1.00 Draw, drains W.; asc. 100 ft. over SW. slope.

40.52 The cor. of secs. 19, 24, 25 and 30, monumented with a quartzite stone, 20x14x5 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T1N
R24E R25E
S24 | S19
S25 | S30
1963

Deposit the original stone alongside the iron post.

Land, rolling.
Soil, sandy loam and rocky.
Timber, none.
Undergrowth, sagebrush.

N. 0°34' W., bet. secs. 19 and 24.

Over mountainous land through dense juniper, pinon and mahogany; by triangulation; asc. 320 ft. over S. slope, changing to SW. slope.

34.90 Ridge, bears NW. and SE.; desc. 40 ft. over NE. slope.

39.89 The ¼ sec. cor. of secs. 19 and 24, monumented with a quartzite stone, 14x10x10 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 4 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T1N
R24E R25E
¼
S24 | S19
1963

Deposit the original stone alongside the iron post.

N. 0°43' W., beginning new measurement.

Dependent Resurvey of the West Boundary of Township 1 North, Range 2


CHAINS

By triangulation; along steep E. slope through dense mahogany, juniper and pinon.

28.75 Spur, projects E.; end of triangulation; desc. 250 ft. over NE. slope.

39.84 Point for the cor. of sec. 13, 18, 19 and 24 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., on solid rock and in a mound of stone, 4 ft. base to top, with brass cap mkd.



Land, mountainous.
Soil, rocky.
Timber, juniper, mahogany and pinon.
Undergrowth, sagebrush.


N. 0°43' W., bet. secs. 13 and 18.

Over mountainous land through dense juniper and pinon.

By triangulation; desc. 800 ft. over steep and broken NE. slope.

39.84 Point for the ¼ sec. cor. of secs. 13 and 18 at proportionate dist.; there is no remaining evidence of the original cor.


Set an iron post, 30 ins. long, 2½ ins. diam., 3 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.



Continue by triangulation; desc. 100 ft. over NE. slope.

56.77 Point for the witness cor. of secs. 7, 12, 13 and 18 at proportionate dist.; there is no remaining evidence of the original witness cor.

Set an iron post, 30 ins. long, 2½ ins. diam., on solid rock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.



Desc. 160 ft. over steep NE. slope.

79.68 Point for the cor. of secs. 7, 12, 13 and 18 at proportionate dist.; there is no remaining evidence of the original cor.

Resurvey of the West Boundary of Township 1 North, Range 25 East

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., on solid rock and in a mound of stone, 5 ft. base to top, with brass cap mkd.

T1N
R24E R25E
S12 | S7
S13 | S18
1963

Land, mountainous.
Soil, rocky.
Timber, juniper, pinon and mahogany.
Undergrowth, sagebrush.

Reestablishment of the Resurvey Executed
by A. Jessen in 1898.

N. $0^{\circ}43'$ W., bet. secs. 7 and 12.

Over mountainous land through dense juniper and pinon;
by triangulation; desc. 320 ft. over broken NE. slope.

14.00 Draw, drains E., irregularly; thence along broken E.
slope.

39.84 Point for the $\frac{1}{4}$ sec. cor. of secs. 7 and 12 at propor-
tionate dist.; there is no remaining evidence of the
original cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins.
in the ground to bedrock, and in a mound of stone, 4 ft.
base to top, with brass cap mkd.

T1S
R24E R25E
 $\frac{1}{4}$
S12 | S7
1963

Continue by triangulation; along E. slope.

52.80 Begin desc. over steep NE. slope, bears NW. and SE.;
desc. 480 ft.

79.68 Point for the cor. of secs. 1, 6, 7 and 12 at propor-
tionate dist.; there is no remaining evidence of the
original cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., on solid
rock and in a mound of stone, 4 ft. base to top, with
brass cap mkd.

T1N
R24E R25E
S1 | S6
S12 | S7
1963

Land, mountainous.
Soil, rocky.
Timber, juniper and pinon.
Undergrowth, sagebrush.

N. $0^{\circ}43'$ W., bet. secs. 1 and 6.

Dependent Resurvey of the West Boundary of Township 1 North, Range 25 East

CHAINS	PLAN
15.50	Over mountainous land through dense juniper and mahogany by triangulation; desc. 160 ft. over NE. slope.
39.84	Ravine, drains E., irregularly; asc. 40 ft. over SE. slope.
	The $\frac{1}{4}$ sec. cor. of secs. 1 and 6, monumented with a sandstone, 24x12x12 ins., set, mkd. and witnessed as described in the official record.
	At the cor. point
	Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., on solid rock and in a mound of stone, 4 ft. base to top, with brass cap mkd.
	<p style="text-align: center;">T1N R24E R25E $\frac{1}{4}$ S1 S6 1963</p>
	Deposit the original stone alongside the iron post.
	N. 0°10' E., beginning new measurement.
	Continue by triangulation; asc. 100 ft. over SE. slope.
18.25	End of triangulation; rocky spur, projects NE.; desc. 210 ft. over NW. slope.
34.90	Road, dozed, bears E. and W., irregularly.
40.35	The cor. of Tps. 1 and 2 N., Rs. 24 and 25 E., monumented with an iron post, 2 $\frac{1}{2}$ ins. diam., set, mkd. and witnessed as described in the official record.
	Land, mountainous.
	Soil, rocky.
	Timber, juniper and pinon.
	Undergrowth, sagebrush.
Dependent Resurvey of the Subdivision of Township 1 North, Range 25 East	
Reestablishment of the Survey Executed by A. Jessen in 1898.	
4.00	From the standard cor. of secs. 31 and 32 on the S. bdy. of the Tp.; previously described.
16.00	N. 0°12' E., bet. secs. 31 and 32.
25.00	Over mountainous land through dense juniper and pinon; by triangulation; desc. 100 ft. over NE. slope.
40.40	Draw, drains E.; asc. 200 ft. over SE. slope.
16.00	Spur, projects E.; desc. 160 ft. over SE. slope.
25.00	Draw, drains E.; asc. 240 ft. over SE. slope.
40.40	The $\frac{1}{4}$ sec. cor. of secs. 31 and 32, monumented with a sandstone, 18x10x8 ins., set, mkd. and witnessed as described in the official record.
	From which the original bearing trees:

Dependent Resurvey of the Subdivision of T. 1 N., R. 25 E.

CHAINS

A pinon, 10 ins. diam., bears S. 74°10' E.,
15 lks. dist., mkd. $\frac{1}{2}$ S32 BT.

A pinon, 10 ins. diam., bears S. 30°40' W.,
27 lks. dist., mkd. $\frac{1}{2}$ S31 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 4 ins.
in the ground to bedrock, and in a mound of stone, 4 ft.
base to top, with brass cap mkd.

T1N R25E

$\frac{1}{2}$

S31 | S32

1963

Deposit the original stone alongside the iron post.

N. 0°23' E., beginning new measurement.

Continue by triangulation; asc. 240 ft. over SE. slope.

30.00 Head of ravine, drains S. 20° E.; thence over SW. slope;
asc. 100 ft.

39.15 The cor. of secs. 29, 30, 31 and 32, monumented with a
sandstone, 30x6x6 ins., set, mkd. and witnessed as
described in the official record.

From which the original bearing trees:

A mahogany, 7 ins. diam., bears N. 62°10' E.,
12 lks. dist., mkd. T1N R25E S29 BT.

A pinon, 18 ins. diam., bears S. 64° E., 16
lks. dist., mkd. T1N R25E S32 BT.

A mahogany, 8 ins. diam., bears S. 42°10' W.,
20 lks. dist., mkd. T1N R25E S31 BT.

A mahogany, 7 ins. diam., bears N. 54°30' W.,
26 lks. dist., mkd. T1N R25E S30 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 4 ins.
in the ground to bedrock, and in a mound of stone, 4 ft.
base to top, with brass cap mkd.

T1N R25E

S30 | S29

S31 | S32

1963

Deposit the original stone alongside the iron post.

Land, mountainous.

Soil, rocky.

Timber, juniper, pinon and mahogany.

Undergrowth, sagebrush.

From the cor. of secs. 25, 30, 31 and 36 on the W. bdy.
of the Tp., previously described.

S. 89°25' E., bet. secs. 30 and 31.

Over mountainous land through dense juniper, mahogany,
and pinon; asc. 330 ft. over SW. slope.

41.31 The $\frac{1}{2}$ sec. cor. of secs. 30 and 31, which is an "X" mkd.
on sandstone, 5x4x2 ft. above the ground, witnessed as

Dependent Resurvey of the Subdivision of T. 1 N., R. 25 E.

CHAINS

described in the official record.

From which the original bearing trees:

- A dead juniper, 6 ins. diam., bears S. 56° W., 62 lks. dist., mkd. ¼ S31 BT.
- A mahogany, 6 ins. diam., bears N. 48°30' W., 82 lks. dist., mkd ½ S30 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., on solid rock and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T1N R25E
 ¼ S30
 S31
 1963

S. 89°33' E., beginning new measurement.

Continue by triangulation; asc. 230 ft. over SW. slope.

24.90 Ridge, bears NW. and SE.; end of triangulation; desc. 45 ft. over E. slope.

39.65 The cor. of secs. 29, 30, 31 and 32, previously described.

Land, mountainous.
 Soil, rocky.
 Timber, juniper, pinon and mahogany.
 Undergrowth, sagebrush.

N. 0°44' E., bet. secs. 29 and 30.

Over mountainous land through dense juniper, mahogany, and pinon; asc. 160 ft. over SW. slope.

14.12 High spur, projects SE.; thence by triangulation; desc. 200 ft. over E. slope.

40.53 End of triangulation; ridge, bears NE. and SW.; desc. 55 ft. over NW. slope.

44.67 The ¼ sec. cor. of secs. 29 and 30, monumented with a sandstone, 20x16x4 ins., set, mkd. and witnessed as described in the official record.

From which the original bearing tree:

- A pine, 28 ins. diam., bears N. 44°45' E., 180 lks. dist., mkd. ¼ S29 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 4 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T1N R25E
 ¼
 S30 | S29
 1963

Deposit the original stone alongside the iron post.

Dependent Resurvey of the Subdivision of T. 1 N., R. 25 E.

N. 0°26' E., beginning new measurement.

By triangulation; desc. 200 ft. over NW. slope.

28.62 End of triangulation; ledge, 50 ft. high, bears NE. and SW.; desc. 315 ft. over NW. slope.

40.92 The cor. of secs. 19, 20, 29 and 30, monumented with a quartzite stone, 15x10x4 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T1N	R25E
S19	S20
S30	S29
1963	

Deposit the original stone alongside the iron post.

Land, mountainous. ?

Soil, rocky.

Timber, juniper, pinon, mahogany and scattering pine.

Undergrowth, sagebrush.

From the cor. of secs. 19, 24, 25 and 30, on the W. bdy. of the Tp., previously described.

N. 87°20' E., bet. secs. 19 and 30.

Over mountainous land through dense mahogany, juniper and pinon; asc. gradually over W. slope through heavy sagebrush.

8.00 Base of steep ascent, bears NE. and SW.; enter dense mahogany; asc. 460 ft. over NW. slope.

23.80 Ridge, bears N. and S.; thence by triangulation; desc. 400 ft. over NE. slope.

41.02 Point for the ¼ sec. cor. of secs. 19 and 30 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 4 ins. in the ground to bedrock, and in a mound of stone, 5 ft. base to top, with brass cap mkd.

T1N	R25E
¼	S19
	S30
1963	

Continue by triangulation; desc. 580 ft. over NE. slope.

62.00 Canyon, drains N.; asc. 400 ft. over NW. slope.

82.04 The cor. of secs. 19, 20, 29 and 30, previously described.

Land, mountainous.

Soil, rocky.

Timber, juniper, mahogany and pinon.

Undergrowth, sagebrush.

Dependent Resurvey of the Subdivision of T. 1 N., R. 25 E.

CHAINS	EVIDENCE
	N. 3°13' W., bet. secs. 19 and 20.
	Over mountainous land through dense pinon and juniper; desc. 240 ft. over NW. slope.
16.01	Begin triangulation; desc. 320 ft. over NW. slope.
38.27	Point for the 1/4 sec. cor. of secs. 19 and 20 at proportionate dist.; there is no remaining evidence of the original cor.
	Set an iron post, 30 ins. long, 2 1/2 ins. diam., on solid rock and in a mound of stone, 4 ft. base to top, with brass cap mkd.
	<p style="text-align: center;">T1N R25E 1/4 S19 S20 1963</p>
	Continue by triangulation; desc. 240 ft. over NW. slope.
51.00	Canyon, drains NE.; asc. 200 ft. over SE. slope.
76.54	The cor. of secs. 17, 18, 19 and 20, monumented with sandstone, 36x12x4 ins., set, mkd. and witnessed as described in the official record.
	From which the original bearing trees:
	<p>A juniper, 10 ins. diam., bears N. 21° E., 21 lks. dist., mkd. T1N R25E S17 BT; A pinon, 9 ins. diam., bears S. 21° E., 31 lks. dist., mkd. T1N R25E S20 BT. A pinon, 10 ins. diam., bears S. 49°15' W., 34 lks. dist., mkd. T1N R25E S19 BT. A pinon, 9 ins. diam., bears N. 78°10' W., 52 lks. dist., mkd. T1N R25E S18 BT.</p>
	At the cor. point
	Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.
	<p style="text-align: center;">T1N R25E S18 S17 S19 S20 1963</p>
	Deposit the original stone alongside the iron post.
	<p>Land, mountainous. Soil, rocky. Timber, juniper, mahogany and pinon.</p>
	From the cor. of secs. 13, 18, 19 and 24, on the W. bdy. of the Tp., previously described.
	N. 89°36' E., bet. secs. 18 and 19.
	Over mountainous land through dense juniper and pinon; by triangulation; desc. 1050 ft. over ledgy NE. slope.
39.27	Point for the 1/4 sec. cor. of secs. 18 and 19 at proportionate dist.; there is no remaining evidence of the original cor.

Dependent Resurvey of the Subdivision of T. 1 N., R. 25 E.

GRAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T1N R25E
¼ S18
S19
1963

Continue by triangulation; desc. 100 ft. over NE. slope.

- 45.00 Ravine, drains NE.; asc. 40 ft. over NE. slope.
- 49.00 Low spur, projects NE.; desc. 160 ft. over NE. slope.
- 69.00 Bottom of Rye Grass Draw, drains N.; asc. gradually over NW. slope.
- 78.54 The cor. of secs. 17, 18, 19 and 20, previously described.

Land, mountainous.
Soil, rocky.
Timber, juniper, mahogany and pinon.
Undergrowth, sagebrush.

N. 0°55' W., bet. secs. 17 and 18.

Over rolling land through bottom of wide draw, through dense juniper; desc. 160 ft. over NW. slope.

- 37.91 Point for the ¼ sec. cor. of secs. 17 and 18 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., on solid rock and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T1N R25E
¼
S18|S17
1963

Continue over NW. slope.

- 62.00 Rye Grass Draw, drains NE. approximately 5.00 chs., thence N.; desc. 40 ft. over E. slope.

- 75.82 The cor. of secs. 7, 8, 17 and 18, monumented with a quartzite stone, 20x14x8 ins., set, mkd. and witnessed as described in the official record.

From which the original bearing trees:

- A pinon, 10 ins. diam., bears N. 59°10' E., 50 lks. dist., mkd. T1N R25E S8 BT.
- A juniper, 14 ins. diam., bears S. 44°30' E., 35 lks. dist., mkd. T1N R25E S17 BT.
- A juniper, 16 ins. diam., bears S. 65°45' W., 68 lks. dist., mkd. T1N R25E S18 BT.
- A pinon, 14 ins. diam., bears N. 84° W., 42 lks. dist., mkd. T1N R25E S7 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

Dependent Resurvey of the Subdivision of T1N, R. 25 E.

CHAINS

T1N R25E
S7|S8
S18|S17
1963

Deposit the original stone alongside the iron post.

Land, rolling.
Soil, sandy loam and rocky.
Timber, juniper and pinon.
Undergrowth, sagebrush.

From the cor. of secs. 7, 12, 13 and 18 on the W. bdy. of the Tp., previously described.

S. 85°07' E., bet. secs. 7 and 18.

Over mountainous land through dense juniper and pinon; desc. 540 ft. over broken NE. slope.

36.68 The 1/4 sec. cor. of secs. 7 and 18, which is an "X" mkd. on a stationary sandstone, 8x6x2 ft. above the ground and witnessed as described in the official record.

From which the original bearing trees:

- A juniper, 18 ins. diam., bears N. 8°45' E., 25 lks. dist., mkd. 1/4 S7 BT.
- A pinon, 18 ins. diam., bears S. 79°45' E., 24 lks. dist., mkd. 1/4 S18 BT.

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., on solid rock and in a mound of stone, 5 ft. base to top, with brass cap mkd.

T1N R25E
1/4 S7
S18
1963

N. 89°58' E., beginning new measurement.

Desc. 240 ft. over broken NE. slope.

23.00 Draw, drains NE.; asc. 100 ft. over W. slope.

35.00 Spur, projects N.; desc. 40 ft. over E. slope.

41.77 The cor. of secs. 7, 8, 17 and 18, previously described.

Land, mountainous.
Soil, rocky.
Timber, juniper and pinon.
Undergrowth, sagebrush.

North, bet. secs. 7 and 8.

Over mountainous land through dense juniper and pinon; desc. 40 ft. along E. slope.

6.00 Rye Grass Draw, drains NW.; thence over NW. slope; desc. 120 ft.

Dependent Resurvey of the Subdivision of T. 1 N., R. 25 E.

CHAINS
40.92

The 1/4 sec. cor. of secs. 7 and 8, monumented with a sandstone, 24x12x8 ins., set, mkd. and witnessed as described in the official record.

From which the original bearing trees:

- A juniper, 20 ins. diam., bears N. 35°45' E., 5 lks. dist., mkd. 1/4 S8 BT.
- A pinon, 18 ins. diam., bears N. 55°15' W., 12 lks. dist., mkd. 1/4 S7 BT.

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 2 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T1N R25E
1/4
S7|S8
1963

Deposit the original stone alongside the iron post.

N. 0°10' E., beginning new measurement.

Desc. 120 ft. over NW. slope.

8.00 Rye Grass Draw, drains E.; thence over N. slope; desc. 280 ft.

9.50 Road, dozed, bears E. and W.

24.94 Right bank of Green River, course E. Banks 4 ft. high, water at present low stage.

Point for the meander cor. of secs. 7 and 8, at proportionate dist.; there is no evidence of the original cor.

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 8 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T1N R25E
MC
S7|S8
1963

Thence across the Green River.

27.60 Left bank of Green River.

The meander cor. of secs. 7 and 8 as determined from the original bearing trees; there is no remaining evidence of the original cor.

From which the original bearing trees:

- A juniper, 8 ins. diam., bears N. 31° E., 135 lks. dist., mkd. T1N R25E S8 MC BT.
- A juniper, 9 ins. diam., bears N. 56° W., 75 lks. dist., mkd. T1N R25E S7 MC BT.

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., on solid rock and in a mound of stone, 4 ft. base to top, with brass cap mkd.

CHAINS

T1N R25E

S7|S8

M C

1963

N. 0°04' W., beginning new measurement.

Asc. 140 ft. over S. slope.

11.20 Spur, projects SW.; desc. 10 ft. over NW. slope.

14.22 The cor. of secs. 5, 6, 7 and 8, monumented with a sandstone, 16x8x5 ins., set, mkd. and witnessed as described in the official record.

From which the original bearing trees:

A juniper, 14 ins. diam., bears S. 78°30' W.,
108 lks. dist., mkd. T1N R25E S7 BT.

A juniper, 18 ins. diam., bears N. 8°30' W.,
110 lks. dist., mkd. T1N R25E S6 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T1N R25E

S6|S5S7|S8

1963

Deposit the original stone alongside the iron post.

Land, mountainous.

Soil, rocky.

Timber, juniper and pinon.

Undergrowth, sagebrush.

From the cor. of secs. 1, 6, 7 and 12, on the W. bdy. of the Tp., previously described.

S. 88°42' E., bet. secs. 6 and 7.

Over rolling and slightly mountainous land through dense juniper and pinon; by triangulation; desc. 280 ft. over broken NE. slope.

38.68 The ¼ sec. cor. of secs. 6 and 7, monumented with a sandstone, 20x8x4 ins., set, mkd. and witnessed as described in the official record.

From which the original bearing trees:

A juniper, 20 ins. diam., bears N. 48°30' W.,
36 lks. dist., mkd. ¼ S6 BT.

A juniper, 18 ins. diam., bears S. 18°30' W.,
80 lks. dist., mkd. ¼ S7 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 2 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

Dependent Resurvey of the Subdivision of T. 1 N., R. 25 E.

CHAIN

T1N R25E

 $\frac{1}{4} \frac{S6}{S7}$

1963

Deposit the original stone alongside the iron post.

N 89°15' E., beginning new measurement.

Desc. 100 ft, over NW, slope.

23.00 Draw, drains SE.; desc. 60 ft. over SE. slope.

27.73 Right bank of Green River, course SW., banks 3 ft. high, water at present low stage.

The meander cor. of secs. 6 and 7, monumented with a sandstone, 15x15x5 ins, set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T1N R25E

 $\frac{S6}{S7} / MC$

1963

Deposit the original stone alongside the iron post.

N 89°44' E., beginning new measurement.

Across Green River.

6.49 Left bank of Green River.

Point for the meander cor of secs. 6 and 7, as established from the original bearing tree; there is no remaining evidence of the original cor. stone.

From which the original bearing tree:

A juniper, 8 ins. diam., bears S. 9° W.,
75 lks. dist., mkd. T1N R25E S7 MC BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

T1N

R25E

 $MC \frac{S6}{S7}$

1963

N. 87°14' E., beginning new measurement.

Asc. 160 ft. over NW. slope through scattering juniper.

6.65 The cor. of secs. 5, 6, 7 and 8, previously described.

Land, rolling and slightly mountainous.

Dependent Resurvey of the Subdivision of T. 1 N., R. 25 E.

CHAINS

Soil, rocky.
Timber, juniper and pinon.
Undergrowth, sagebrush.

N. 0°10' E., bet. secs. 5 and 6.

Over rolling land through scattering juniper and pinon;
desc. 40 ft. over broken W. slope.

40.47

The $\frac{1}{2}$ sec. cor. of secs. 5 and 6, monumented with a sandstone, 20x11x6 ins., set, mkd. and witnessed as described in the official record.

From which the original bearing trees:

A juniper, 8 ins. diam., bears S. 72°30' E.,
20 lks. dist., mkd. $\frac{1}{2}$ S5 BT.

A juniper, 7 ins. diam., bears N. 68° W., 55
lks. dist., mkd. $\frac{1}{2}$ S6 BT.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins.
in the ground, and in a collar of stone, with brass
cap mkd.

T1N R25E

$\frac{1}{2}$
S6|S5
1963

Deposit the original stone alongside the iron post.

N. 0°10' W., beginning new measurement.

Desc. 80 ft. over NW. slope.

2.61

Left bank of the Green River, course SW.; banks 4 ft.
high, water at present low stage.

Point for the meander cor. of secs. 5 and 6.

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., on solid
rock and in a mound of stone, 4 ft. base to top, with
brass cap mkd.

T1N R25E

MC
~~S6|S5~~
1963

Thence over water along left side of river.

2.93

Point for meander cor. of secs. 5 and 6 at proportionate
distance, falls in river.

12.65

Left bank of Green River, bears NW. and SE.

The meander cor. of secs. 5 and 6, monumented with a
sandstone, 8x13x18 ins., set, mkd. and witnessed as
described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins.
in the ground, with brass cap mkd.

Dependent Resurvey of the Subdivision of T. 1 N., R. 25 E.

GRADE

T1N R25E

S6|S5

MC

1963

Deposit the original stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 2½ ft. high, W. of cor.

N. 0°10' W., beginning new measurement.

Asc. 195 ft. over SW. slope through scattering juniper.

14.45 Leave juniper; thence over rolling land through heavy sagebrush.

27.32 The cor. of secs. 5, 6, 31 and 32, on the N. bdy. of the Tp., monumented with an iron post, 2½ ins. diam., set, mkd. and witnessed as described in the official record.

Land, rolling and broken.

Soil, sandy clay and rocky.

Timber, scattering juniper.

Undergrowth, sagebrush.

From the standard cor. of secs. 32 and 33, on the S. bdy. of the Tp., previously described.

N. 0°01' E., bet. secs. 32 and 33.

Over rolling land through heavy sagebrush.

1.00 Crouse Creek, 6 ins. deep, 8 lks. wide, course NE.; asc. 135 ft. over E. slope, changing to SE. slope.

11.50 Dirt road, unimproved, bears E. and W.

15.10 Dirt road, graded, bears NE. and SW.

23.40 Small spring, bears W., 2.00 chs. dist.

25.60 Dirt road, unimproved, bears E. and W.

27.10 Enter dense juniper and pinon; slope changes to SE.

40.27 The ¼ sec. cor. of secs. 32 and 33, which is an "X" on a sandstone ledge and ¼ mkd. W. of cor. point.

From which the original bearing trees:

A pinon, 14 ins. diam., bears S. 2°50' E., 180 lks. dist., mkd. ¼ S33 BT.

A pinon, 7 ins. diam., bears S. 64° W., 30 lks. dist., mkd. ¼ S32 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., on solid rock and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T1N R25E

¼

S32|S33

1963

N. 0°04' E., beginning new measurement.

Dependent Resurvey of the Subdivision of T. 1 N., R. 25 E.

CHAINS

BRANCH

Asc. gradually over SE. slope.

.90 Spur, projects NE.; desc. 75 ft. over NE. slope.

5.00 Wash, 4 ft. deep, 10 lks. wide, drains E.

7.20 Spring branch, course SE.; asc. 120 ft. over S. slope.

15.50 Leave timber; enter sagebrush flat.

40.28 The cor. of secs. 28, 29, 32 and 33, monumented with a sandstone, 20x10x5 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

T1N R25E	
S29	S28
S32	S33
1963	

Deposit the original stone alongside the iron post.

Land, rolling.

Soil, sandy clay.

Timber, juniper and pinon.

Undergrowth, sagebrush.

From the cor. of secs. 29, 30, 31 and 32, previously described.

S. 89°45' E., bet. secs. 29 and 32.

Over mountainous land through dense juniper and pinon; asc. 115 ft. over SW. slope.

8.21 Spur, projects S.; desc. 920 ft. over ledgy E. slope.

29.00 Bottom of steep descent, bears N. and S.; enter heavy sagebrush and scattering juniper and pinon; continue over E. slope.

40.29 The ¼ sec. cor. of secs. 29 and 32, monumented with a sandstone, 16x10x6 ins., set, mkd. and witnessed as described in the official record.

From which the original bearing trees:

A pinon, 8 ins. diam., bears N. 58° E., 56 lks. dist., mkd. ¼ S29 BT.

A pinon, 9 ins. diam., bears S. 49°45' E., 94 lks. dist., mkd. ¼ S32 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T1N R25E	
¼	S29
	S32
1963	

Dependent Resurvey of the Subdivision of T. 1 N., R. 25 E.

<p>5.10</p> <p>18.14</p> <p>32.00</p> <p>39.75</p>	<p>Deposit the original stone alongside the iron post.</p> <p>N. 88°31' E., beginning new measurement.</p> <p>Desc. 50 ft. over E. slope.</p> <p>Wash, 4 ft. deep, 20 lks. wide, drains S., irregularly; asc. 100 ft. over W. slope.</p> <p>Ridge, bears N. and S.; thence by triangulation; desc. 300 ft. over broken E. slope.</p> <p>Bottom of steep desc., bears N. and S.; leave timber, thence over gentle E. slope through heavy sagebrush.</p> <p>The cor. of secs. 28, 29, 32 and 33, previously described.</p> <p>Land, mountainous. Soil, rocky. Timber, juniper and pinon. Undergrowth, sagebrush.</p>
<p>11.50</p> <p>40.13</p> <p>14.18</p> <p>42.00</p> <p>43.15</p>	<p>N. 0°22' E., bet. secs. 28 and 29.</p> <p>Over mountainous land through dense juniper and pinon; by triangulation.</p> <p>Draw, drains SE.; asc. 600 ft. over SW. slope.</p> <p>The ½ sec. cor. of secs. 28 and 29, which is an "X" mkd. on a sandstone, 4x4x1½ ft. above the ground, and ¼ W. of the cor. point.</p> <p>At the cor. point</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., on solid rock, and in a mound of stone, 5 ft. base to top, with brass cap mkd.</p> <p style="text-align: center;">T1N R25E ¼ S29 S28 1963</p> <p>N. 0°18' W., beginning new measurement.</p> <p>Asc. 240 ft. over SW. slope.</p> <p>Ridge, bears E. and W.; thence by triangulation; desc. 480 ft. over NE. slope.</p> <p>Head of ravine, drains NE.; asc. gradually over SE. slope.</p> <p>The cor. of secs. 20, 21, 28 and 29, which is an "X" mkd. on a ledge, 25 ft. high, bearing NE. and SW.</p> <p>From which the original bearing trees:</p> <p style="padding-left: 40px;">A pine, 14 ins. diam., bears N. 10°30' E., 65 lks. dist., mkd. T1N R25E S21 BT. A pine, 10 ins. diam., bears S. 65° W., 17 lks. dist., mkd. T1N R25E S29 BT. A juniper, 6 ins. diam., bears N. 5°15' W., 48 lks. dist., mkd. T1N R25E S20 BT.</p> <p>At the cor. point</p>

Dependent Resurvey of the Subdivision of T. 1 N., R. 25 E.

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., on solid rock and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T1N R25E
S20|S21
S29|S28
1963

Land, mountainous.
Soil, rocky.
Timber, juniper, pinon and scattering pine.
Undergrowth, sagebrush.

From the cor. of secs. 19, 20, 29 and 30, previously described.

N. 89°44' E., bet. secs. 20 and 29.

Over mountainous land through dense pinon and juniper; by triangulation; asc. gradually to top of spur.

2.00 Spur, projects N.; desc. 320 ft. over NE. slope.

16.00 Ravine, drains N.; asc. 660 ft. over NW. slope.

40.84 The ½ sec. cor. of secs. 20 and 29, monumented with a sandstone, 18x7x2 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 4 ins. in the ground to solid rock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T1N R25E
½ S20
S29
1963

Deposit the original stone alongside the iron post.

S. 87°35' E., beginning new measurement.

Asc. 160 ft. over W. slope.

20.00 Ridge, bears N. and S.; desc. 600 ft. over E. slope.

38.22 The cor. of secs. 20, 21, 28 and 29, previously described.

Land, mountainous.
Soil, rocky.
Timber, juniper and pinon.
Undergrowth, sagebrush.

N. 0° 04' E., bet. secs. 20 and 21.

Over mountainous land through dense juniper and pinon; by triangulation; asc. 120 ft. over SE. slope.

10.00 Spur, projects NE.; desc. 280 ft. over NE. slope.

25.00 Ravine, drains E.; asc. 300 ft. over SE. slope.

Dependent Resurvey of the Subdivision of T. 1 N., R. 25 E.

CHAINS

39.99


The 1/4 sec. cor. of secs. 20 and 21, monumented with a sandstone, 30x20x5 ins., set, mkd. and witnessed as described in the official record.

From which the original bearing trees:

- A pinon, 11 ins. diam., bears S. 86°45' E., 51 lks. dist., mkd. 1/4 S21 BT.
- A juniper, 8 ins. diam., bears N. 31°30' W., 11 lks. dist., mkd. 1/4 S20 BT.

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 4 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.



Deposit the original stone alongside the iron post.

N. 7°24' W., beginning new measurement.

Continue by triangulation; asc. 60 ft. over S. slope, changing to SW. slope.


11.00

Ridge, bears NE. and SW.; desc. 480 ft. over NW. slope, changing to W. slope.

39.18

Point for the cor. of secs. 16, 17, 20 and 21 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.



Land, mountainous.
Soil, rocky.
Timber, juniper and pinon.
Undergrowth, sagebrush.

From the cor. of secs. 17, 18, 19 and 20, previously described.

N. 89°23' E., bet. secs. 17 and 20.

Over mountainous land through dense juniper and pinon; asc. gradually along N. slope; by triangulation.

16.00

Ravine, drains N.; asc. 200 ft. over NW. slope.

39.27

Point for the 1/4 sec. cor. of secs. 17 and 20 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 4 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

Dependent Resurvey of the Subdivision of T. 1 N., R. 25 E.

CHADRS

EXHIBIT

T1N R25E

S17
S20
1963

Continue by triangulation; asc. 460 ft. over NW. slope, changing to W. slope.

78.55 The cor. of secs. 16, 17, 20 and 21, previously described.

Land, mountainous.
Soil, rocky.
Timber, juniper and pinon.
Undergrowth, sagebrush.

N. 0°51' E., bet. secs. 16 and 17.

Over mountainous land through dense juniper and pinon; along W. slope; by triangulation.

15.00 Spur, projects NW.; desc. 500 ft. over broken NW. slope.

38.85 Point for the 1/4 sec. cor. of secs. 16 and 17 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 4 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T1N R25E

S17 S16
1963

Continue by triangulation; desc. 80 ft. over NW. slope.

48.00 Head of ravine, drains W.; asc. 160 ft. over SW. slope.

70.00 Ridge, bears NW. and E.; desc. 200 ft. over N. slope.

77.70 The cor. of secs. 8, 9, 16 and 17, monumented with a sandstone, 18x10x8 ins., set, mkd. and witnessed as described in the official record.

From which the original bearing trees:

- A pinon, 12 ins. diam., bears N. 69°10' E., 24 lks. dist., mkd. T1N R25E S9 BT.
- A pinon, 14 ins. diam., bears S. 77°45' E., 14 lks. dist., mkd, T1N R25E S16 BT.
- A dead juniper, 12 ins. diam., bears S. 17°45' W., 61 lks. dist., mkd. T1N R25E S17 BT.
- A dead juniper, 15 ins. diam., bears N. 10°10' W., 22 lks. dist., mkd. T1N R25E S8 BT.

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 8 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T1N R25E

S8 S9
S17 S16
1963

Deposit the original stone alongside the iron post.

Dependent Resurvey of the Subdivision of T. 1 N., R. 25 E.

CHAINS

Land, mountainous.
Soil, rocky.
Timber, juniper and pinon.
Undergrowth, sagebrush.

From the cor. of secs. 7, 8, 17 and 18, previously described.

N. 86°35' E., bet. secs. 8 and 17.

Over mountainous land through dense juniper and pinon; desc. over an E. slope; by triangulation.

1.70 Rye Grass Draw, drains N.; asc. 320 ft. over W. slope, changing to SW. slope.

40.07 The $\frac{1}{4}$ sec. cor. of secs. 8 and 17, monumented with a sandstone, 10x7x4 ins., set, mkd. and witnessed as described in the official record.

From which the original bearing trees:

A dead pinon, 8 ins. diam., bears S. 13° E.,
60 lks. dist., mkd. $\frac{1}{4}$ S17 BT.

A juniper, 14 ins. diam., bears N. 26°10' W.,
38 lks. dist., mkd. $\frac{1}{4}$ S8 BT.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 2 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T1N R25E

$\frac{1}{4}$ $\frac{S8}{S17}$
1963

N. 89°08' E., beginning new measurement.

Asc. 160 ft. over SW. slope.

25.00 Spur, projects NW.; desc. 100 ft. over NE. slope, changing to N. slope.

40.61 The cor. of secs. 8, 9, 16 and 17, previously described.

Land, mountainous.
Soil, rocky.
Timber, juniper and pinon.
Undergrowth, sagebrush.

N. 0°24' W., bet. secs. 8 and 9.

Over mountainous land through dense juniper and pinon; by triangulation; desc. 600 ft. over N. slope.

38.00 Ravine, drains NW.; asc. 30 ft. over SW. slope.

39.83 The $\frac{1}{4}$ sec. cor. of secs. 8 and 9, monumented with a sandstone, 17x10x2 ins., set, mkd. and witnessed as described in the official record.

From which the original bearing trees:

A juniper, 20 ins. diam., bears S. 67°45' E.,
24 lks. dist., mkd. $\frac{1}{4}$ S9 BT.

CHAINS

A juniper, 14 ins. diam., bears N. 60°15' W.,
34 lks. dist., mkd. ½ S8 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 3 ins.
in the ground to bedrock, and in a mound of stone, 5
ft. base to top, with brass cap mkd.

T1N R25E

½
S8|S9
1963

Deposit the original stone alongside the iron post.

N. 0°15' E., beginning new measurement.

Asc. 65 ft. over SW. slope.

15.00 Spur, projects NW.; desc. 240 ft. over N. slope.

16.40 Dozed road, unimproved, bears E. and W.

32.90 Right bank of Green River, course E., water at present
low stage.

The meander cor. of secs. 8 and 9, which is an "X" mkd.
on a sandstone ledge, 100 ft. high, and witnessed as
described in the official record.

From which the original bearing trees:

A juniper, 20 ins. diam., bears S. 42°45' E.,
20 lks. dist., mkd. T1N R25E S9 MC BT.

A juniper, 12 ins. diam., bears S. 59°45' W.,
58 lks. dist., mkd. T1N R25E S8 MC BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., on solid
sandstone, and in a mound of stone, 4 ft. base to top,
with brass cap mkd.

T1N R25E

MC
S8|S9
1963

N. 0°48' E., beginning new measurement.

Across Green River.

6.26 Left bank of Green River.

Point for the meander cor. of secs. 8 and 9 at Jessen's
1898 record distance from the cor. of secs. 4, 5, 8 and
9; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., on solid
rock and in a mound of stone, 5 ft. base to top, with
brass cap mkd.

T1N R25E

S8|S9
MC
1963

Dependent Resurvey of the Subdivision of T. 1 N., R. 25 E.

CHAINS

7.11

Asc. gradually over S. slope.
The cor. of secs. 4, 5, 8 and 9, monumented with a sandstone, 18x8x3 ins., set, mkd. and witnessed as described in the official record.

From which the original bearing trees:

- A juniper, 12 ins. diam., bears N. 64°30' E., 19 lks. dist., mkd. T1N R25E S4 BT.
- A juniper, 14 ins. diam., bears S. 41°30' E., 62 lks. dist., mkd. T1N R25E S9 BT.
- A juniper, 10 ins. diam., bears S. 26°30' W., 40 lks. dist., mkd. T1N R25E S8 BT.
- A juniper, 9 ins. diam., bears N. 46°35' W., 90 lks. dist., mkd. T1N R25E S5 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T1N R25E
S5 | S4
S8 | S9
1963

Deposit the original stone alongside the iron post.

Land, mountainous.
Soil, rocky.
Timber, juniper and pinon.
Undergrowth, sagebrush.

10.20

From the cor. of secs. 5, 6, 7 and 8, previously described S. 89°54' E., bet. secs. 5 and 8.

Over rolling land through scattering juniper and pinon; desc. gradually over gentle S. slope.

Trail road, bears SE. and NW.

40.20

The ¼ sec. cor. of secs. 5 and 8, monumented with a sandstone, 16x6x2 ins., set, mkd. and witnessed as described in the official record.

From which the original bearing trees:

- A juniper, 8 ins. dian., bears S. 26°45' W., 6 lks. dist., mkd. ¼ S8 BT.
- A juniper, 7 ins. diam., bears N. 26°45' W., 26 lks. dist., mkd. ¼ S5 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 4 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T1N R25E
¼ S5
¼ S8
1963

Deposit the original stone alongside the iron post.

S. 89°54' E., beginning new measurement.
Continue over gentle S. slope through dense juniper and pinon.

8.00

Leave timber; enter sagebrush covered flat.

30.00

Enter dense juniper and pinon.

40.22

The cor. of secs. 4, 5, 8 and 9, previously described.

Land, gently rolling.
Soil, sandy clay.
Timber, juniper and pinon.
Undergrowth, sagebrush.

Dependent Resurvey of the Subdivision of T. 1 N., R. 25 E.

CHAINS	
28.00	<p>N. 0°09' E., bet. secs. 4 and 5.</p> <p>Over rolling land through dense juniper and pinon; asc. 240 ft. over S. slope.</p>
40.57	<p>Rocky ridge, bears E. and W.; desc. 210 ft. over N. slope.</p> <p>The $\frac{1}{2}$ sec. cor. of secs. 4 and 5, monumented with a sandstone, 18x10x4 ins., set, mkd. and witnessed as described in the official record.</p>
	<p>From which the original bearing trees:</p> <p style="padding-left: 40px;">A juniper, 8 ins. diam., bears S. 5° E., 105 lks. dist., mkd. $\frac{1}{2}$ S4 BT.</p> <p style="padding-left: 40px;">A pinon, 18 ins. diam., bears S. 24° W., 91 lks. dist., mkd. $\frac{1}{2}$ S5 BT.</p>
	<p>At the cor. point</p> <p>Set an iron post, 30 ins. long, 2$\frac{1}{2}$ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T1N R25E $\frac{1}{2}$ S5 S4 1963</p>
	<p>Deposit the original stone alongside the iron post.</p>
	<p>N. 0°16' E., beginning new measurement.</p>
	<p>Desc. 55 ft. over rolling N. slope through scattering juniper and heavy sagebrush.</p>
5.50	<p>Dirt road, unimproved, bears E. and W.</p>
38.00	<p>Wash, 5 ft. deep, 10 lks. wide, drains SW.</p>
40.34	<p>The cor. of secs. 4, 5, 32 and 33, on the N. bdy. of the Tp., monumented with an iron post, 2$\frac{1}{2}$ ins. diam., set, mkd. and witnessed as described in the official record.</p> <p>Land, rolling. Soil, sandy clay. Timber, juniper. Undergrowth, sagebrush and shadscale.</p>
	<p>From the standard cor. of secs. 33 and 34, on the S. bdy. of the Tp., previously described.</p>
	<p>N. 0°05' E., bet. secs. 33 and 34.</p>
	<p>Over mountainous land through dense juniper and pinon; by triangulation.</p>
2.00	<p>Bottom of draw, drains W., irregularly; asc. 560 ft. over S. slope.</p>
40.51	<p>The $\frac{1}{2}$ sec. cor. of secs. 33 and 34, monumented with a sandstone, 18x14x6 ins., set, mkd. and witnessed as described in the official record.</p>
	<p>From which the original bearing trees:</p> <p style="padding-left: 40px;">A pinon, 14 ins. diam., bears S. 72°40' E., 37 lks. dist., mkd. $\frac{1}{2}$ S34 BT.</p> <p style="padding-left: 40px;">A pinon, 15 ins. diam., bears N. 72°20' W., 13 lks. dist., mkd. $\frac{1}{2}$ S33 BT.</p>
	<p>At the cor. point</p>
	<p>Set an iron post, 30 ins. long, 2$\frac{1}{2}$ ins. diam., 8 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.</p>
	<p style="text-align: center;">T1N R25E $\frac{1}{2}$ S33 S34 1963</p>
	<p>Deposit the original stone alongside the iron post.</p>

Dependent Resurvey of the Subdivision of T. 1 N., R. 25 E.

CREATED

N. 0°08' E., beginning new measurement.

Asc. 20 ft. over S. slope.

3.20 Ridge, bears E. and W.; desc. 880 ft. over N. slope.

40.10 The cor. of secs. 27, 28, 33 and 34, monumented with a sandstone, 20x10x3 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

T1N R25E
 S28|S27
 S33|S34
 1963

Deposit the original stone alongside the iron post.

Land, mountainous.

Soil, rocky.

Timber, juniper, pinon and mahogany.

Undergrowth, sagebrush.

From the cor. of secs. 28, 29, 32 and 33, previously described.

S. 89°54' E., bet. secs. 28 and 33.

Over rolling land through heavy sagebrush; desc. 140 ft. over NW. slope.

3.10 Enter dense juniper and pinon.

17.50 Ledge, 50 ft. high, bears N. and S.

19.50 Leave timber.

21.90 Wash, 4 ft. deep, 10 lks. wide, drains NE.

40.19 The ¼ sec. cor. of secs. 28 and 33, monumented with a sandstone, 14x10x4 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T1N R25E
 ¼ S28
 S33
 1963

Deposit the original stone alongside the iron post and raise a mound of stone, 3 ft. base, 2½ ft. high, N. of cor.

East, beginning new measurement.

Desc. gradually over SE. slope.

1.19 From this point, a U.S.G.S. Bench Mark bears N., 9 lks. dist., and is a brass tablet set in a concrete base. Brass tablet mkd.

23HJH
 Above Sea
 Δ
 6640
 1950

1.40 Road, graded, bears N. and S.

15.25 Crouse Creek, 6 ins. deep, 8 lks. wide, course NE.; irregularly; asc. 40 ft. over NW. slope.

40.36 The cor. of secs. 27, 28, 33 and 34, previously described.

CHAINS

Land, broken and rolling.
Soil, sandy loam and rocky.
Timber, juniper and pinon.
Undergrowth, sagebrush.

N. 0°07' E., bet. secs. 27 and 28.

Over mountainous land through heavy sagebrush; by triangulation; desc. gradually over bottom of wide draw.

- 5.00 Dirt road, unimproved, bears E. and W.
- 14.00 Bottom of draw, drains W.; asc. 200 ft. over S. slope.
- 32.25 End of triangulation; spur, projects SW.; desc. 135 ft. over NW. slope.
- 40.11 The $\frac{1}{2}$ sec. cor. of secs. 27 and 28, monumented with a sandstone, 20x10x5 ins., set, mkd. and witnessed as described in the official record.

From which the original bearing trees:

A juniper, 17 ins. diam., bears N. 82°15' E.,
18 lks. dist., mkd. $\frac{1}{2}$ S27 BT.
A pinon, 14 ins. diam., bears S. 56°30' W.,
68 lks. dist., mkd. $\frac{1}{2}$ S28 BT.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 3 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T1N R25E
 $\frac{1}{2}$
S28 | S27
1963

Deposit the original stone alongside the iron post.

N. 1°06' W., beginning new measurement.

By triangulation; desc. 280 ft. over broken NW. slope.

- 23.00 Draw, drains SW.; asc. 300 ft. over S. slope.
- 43.02 The cor. of secs. 21, 22, 27 and 28, monumented with a stationary sandstone, 5x3x1 ft. above ground, mkd. "X" at the cor. point

From which the original bearing trees:

A pinon, 14 ins. diam., bears N. 64°58' E.,
38 lks. dist., mkd. T1N R25E S22 BT.
A pinon, 16 ins. diam., bears S. 66° E., 35
lks. dist., mkd. T1N R25E S27 BT.
A pinon, 8 ins. diam., bears S. 77°45' W.,
24 lks. dist., mkd. T1N R25E S28 BT.
A pinon, 9 ins. diam., bears N. 54°40' W.,
45 lks. dist., mkd. T1N R25E S21 BT.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., on solid rock and in a mound of stone, 5 ft. base to top, with brass cap mkd.

Dependent Resurvey of the Subdivision of T. 1 N., R. 25 E.

T1N R25E
S21|S22
S28|S27
1963

Land, mountainous.
Soil, sandy loam and rocky.
Timber, juniper and pinon.
Undergrowth, sagebrush.

From the cor. of secs. 20, 21, 28 and 29, previously described.

S. 89°41' E., bet. secs. 21 and 28.

Over mountainous land through dense pinon and juniper; by triangulation; desc. 500 ft. over broken NE. slope. Ravine drains NE.

1.50
39.80

The 1/4 sec. cor. of secs. 21 and 28, monumented with a sandstone, 20x15x10 ins., set, mkd. and witnessed as described in the official record.

From which the original bearing trees:

- A pinon, 14 ins. diam., bears S. 51°05' E., 73 lks. dist., mkd. 1/4 S28 BT.
- A pinon, 8 ins. diam., bears N. 2°40' W., 57 lks. dist., mkd. 1/4 S21 BT.

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T1N R25E
1/4 S21
1/4 S28
1963

Deposit the original stone alongside the iron post.

S. 89°59' E., beginning new measurement.

Desc. 200 ft. over NE. slope.

15.00

Dirt road, graded, bears N. and S.

16.00

Crouse Creek, 6 ins. deep, 8 lks. wide, course N.; asc. 400 ft. over SW. slope, changing to S. slope.

40.16

The cor. of secs. 21, 22, 27 and 28, previously described.

Land, mountainous.
Soil, sandy clay and rocky.
Timber, juniper and pinon.
Undergrowth, sagebrush.

N. 0°13' W., bet. secs. 21 and 22.

Over mountainous land through dense juniper and pinon; asc. 80 ft. over S. slope.

5.60

Spur, projects W.; thence by triangulation; desc. 640 ft. over broken and ledgy NW. slope.

33.20

Crouse Creek, 6 ins. deep, 8 lks. wide, course NE.

Dependent Resurvey of the Subdivision of T. 1 N., R. 25 E.

CHAINS

- 33.50 Dirt road, graded, follows Crouse Creek along bottom of canyon.
- 35.00 Same road, bears NW. and SE.
- 35.50 Crouse Creek, course NW.; asc. 180 ft. over steep and ledgy SW. slope.
- 40.37 The 1/4 sec. cor. of secs. 21 and 22, which is an "X" mkd. on a stationary sandstone, 10x4x3 ft. above the ground and witnessed as described in the official record.

From which the original bearing trees:


- A pinon, 26 ins. diam., bears N. 64°50' E., 14 lks. dist., mkd. 1/4 S22 BT.
- A pinon, 16 ins. diam., bears N. 81°45' W., 19 lks. dist., mkd. 1/4 S21 BT.

An iron post cannot be perpetuated at the exact cor. point; therefore, I set a witness 1/4 sec. cor. for secs. 21 and 22, N. 6°52' W., 6 lks. dist., hereinafter described.

N. 6°52' W.; beginning new measurement.

- .06 Point selected for the witness 1/4 sec. cor. of secs. 21 and 22.

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.




Continue by triangulation; asc. 320 ft. over W. slope.

- 19.90 Rocky spur, projects W.; desc. 160 ft. over NW. slope.

- 25.00 Draw, drains SW.; asc. 280 ft. over SW. slope.

- 40.44 Point for the cor. of secs. 15, 16, 21 and 22 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 4 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.



Land, mountainous.
 Soil, rocky.
 Timber, juniper and pinon.
 Undergrowth, sagebrush.

From the cor. of secs. 16, 17, 20 and 21, previously described.

Dependent Resurvey of the Subdivision T. 1 N., R. 25 E.

S. 69°40' E., bet. secs. 16 and 21.

Over mountainous land through dense juniper and pinon; by triangulation; asc. 640 ft. over W. slope.

27.43 End of triangulation; ridge, bears N. and S.; desc. 40 ft. over NE. slope.


29.17 The witness 1/4 sec. cor. of secs. 16 and 21, monumented with a sandstone, 15x6x3 ins., set, mkd. and witnessed as described in the official record.

From which the original bearing trees:

- A pinon, 8 ins. diam., bears S. 8°30' W., 39 lks. dist., mkd. 1/4 S21 WC BT.
- A pinon, 8 ins. diam., bears N. 30°20' W., 45 lks. dist., mkd. 1/4 S16 WC BT.

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 2 ins. in the ground, and in a mound of stone, 4 ft. base to top, with brass cap mkd.




N. 77°26' E., beginning new measurement.

By triangulation; desc. 1200 ft. over ledgy NE. slope.

12.61 True point for the 1/4 sec. cor. of secs. 16 and 21 at proportionate dist.; falls on an inaccessible ledge.

19.77 True point for the witness 1/4 sec. cor. of secs. 16 and 21 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2 1/2 ins. diam., on solid rock and in a mound of stone, 4 ft. base to top, with brass cap mkd.



Desc. 50 ft. over NE. slope

20.50 Road, graded, follows along bottom of Crouse Creek Canyon.

21.50 Crouse Creek, 6 ins. deep, 8 lks. wide, course NW.; asc. 650 ft. over SW. slope.

54.10 The cor. of secs. 15, 16 21 and 22, previously described.

Land, mountainous.
 Soil, rocky.
 Timber, juniper and pinon.
 Undergrowth, sagebrush.

Dependent Resurvey of the Subdivision of T. 2 N., R. 25 E.

CHAINS

ARLAMO

N. 2°22' E., bet. secs. 15 and 16..

Over mountainous land through dense juniper and pinon; by triangulation; asc. 300 ft. over SW. slope.

11.30 Ridge, bears NE. and SW.; continue by triangulation; desc. 900 ft. over NW. slope.

40.18 The 1/4 sec. cor. of secs. 15 and 16, monumented with a sandstone, 18x5x3 ins., set, mkd. and witnessed as described in the official record.

From which the original bearing trees:

- A pinon, 8 ins. diam., bears N. 80°40' E., 21 lks. dist., mkd. 1/4 \$15 BT..
- A pinon, 9 ins. diam., bears S. 83°35' W. 34 lks. dist., mkd. 1/4 \$16 BT..

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., on solid rock and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T1N R25E
 1/4
 S16 | S15
 1963

Deposit the original stone alongside the iron post.

N. 0°10' W., beginning new measurement.

Desc. 520 ft. over NW, slope.

22.00 Road, graded, bears NE. and SW.

30.50 Crouse Creek, 6 ins. deep, 8 lks. wide, course NE.; asc. 80 ft. over SE. slope.

40.26 The cor. of secs. 9, 10, 15 and 16, monumented with a sandstone, 18x5x3 ins., set, mkd. and witnessed as described in the official record,

From which the original bearing trees:

- A pinon, 10 ins. diam., bears N. 38°48' E., 31 lks. dist., mkd. T1N R25E S10 BT.
- A pinon, 12 ins. diam., bears S. 11°34' E., 66 lks. dist., mkd. T1N R25E S15 BT.
- A juniper, 20 ins. diam., bears S. 39°41' W., 105 lks. dist., mkd. T1N R25E S16 BT.
- A pinon, 10 ins. diam., bears N. 76°30' W., 17 lks. dist., mkd. T1N R25E S9 BT.

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

T1N R25E
 S9 | S10
 S16 | S15
 1963

Deposit the original stone alongside the iron post.

Dependent Resurvey of the Subdivision of T. 1 N., R. 25 E.

Land, mountainous.
Soil, rocky.
Timber, juniper and pinon.
Undergrowth, sagebrush.

From the cor. of secs. 8, 9, 16 and 17, previously described.

N. 86°55' E., bet. secs. 9 and 16.

By triangulation; along broken N. slope through dense juniper and pinon.

30.20 Ridge, bears NE. and SW.; thence along SE. slope.

40.27 Point for the $\frac{1}{4}$ sec. cor. of secs. 9 and 16 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 4 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T1N R25E
 $\frac{1}{4}$ $\frac{S9}{S16}$
1963

Continue by triangulation; desc. 520 ft. over SE. slope.

80.54 The cor. of secs. 9, 10, 15 and 16, previously described.

Land, mountainous.
Soil, rocky clay.
Timber, medium dense juniper and pinon.
Undergrowth, scattered sagebrush.

N. 0°03' E., bet. secs. 9 and 10.

Over mountainous land through scattered timber; by triangulation; asc. 120 ft. over a broken SE. slope, changing to S. slope.

39.95 End of triangulation.

40.21 The $\frac{1}{4}$ sec. cor. of secs. 9 and 10, which is an "X" 5 ins. long, 1 in. deep, cut on the top of a sandstone ledge. There is no remaining evidence of the bearing trees.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., in a mound of stone, 4 ft. base to top, with brass cap mkd.

T1N R25E
 $\frac{1}{4}$ $S9|S10$
1963

N. 0°12' W., beginning new measurement.

Asc. 10 ft. over a S. slope

Spr. projects E.; desc. 390 ft. over N. slope

2.00

Dependent Resurvey of the Subdivision of T. 1 N., R. 25 E.

CHAINS

BRAND

16.88

Right bank of the Green River, course N. 60° E., banks slope abruptly into the river, water at present low stage

Point for the meander cor. of secs. 9 and 10, identified by old permanent river bank, however, there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 4 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T1N R25E

MC

S9 | S10

1963.

Thence across river.

23.20

Left bank of the Green River.

Point for the meander cor. of secs. 9 and 10, identified by old permanent river bank, however, there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 16 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T1N R25E

S9 | S10

MC

1963

Asc. 80 ft. over broken SE. slope.

35.35

The cor. of secs. 3, 4, 9 and 10, monumented with a sandstone, 15x7x5 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground to bedrock, and in a mound of stone, 2 ft. base to top, with brass cap mkd.

T1N R25E

S4 | S3

S9 | S10

1963.

Deposit the original stone alongside the iron post.

Land, mountainous.

Soil, rocky.

Timber, juniper and pinon.

Undergrowth, sagebrush.

From the cor. of secs. 4, 5, 8 and 9, previously described.

East, bet. secs. 4 and 9.

By triangulation; asc. 400 ft. over ledgy S. slope, changing to SW. slope.

40.27

The ¼ sec. cor. of secs. 4 and 9, which is an "X" mkd. on sandstone ledge and ¼ mkd. N. of cor. point.

Dependent Resurvey of the Subdivision of T. 1 N., R. 25 E.

CHAINS

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., on solid rock and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T1N R25E

$$\frac{1}{4} \begin{array}{l} S4 \\ S9 \end{array}$$

1963

N. $89^{\circ}51'$ E., beginning new measurement.

Asc. 50 ft. over SW. slope.

4.30 Ridge, bears NW. and SE.; thence by triangulation; desc. 520 ft. over NE. slope through dense juniper and pinon, becoming scattering near cor. of secs. 3, 4, 9 and 10.

40.16 The cor. of secs. 3, 4, 9 and 10, previously described.

Land, mountainous.

Soil, rocky.

Timber, juniper and pinon.

Undergrowth, sagebrush.

N. $0^{\circ}05'$ W., bet. secs. 3 and 4.

Over rolling land through scattering juniper and pinon; asc. 120 ft. over S. slope.

6.00 Low spur, projects SE.; desc. 60 ft. over NE. slope.

24.70 Draw, drains SE.; asc. 80 ft. over rolling S. slope.

40.24 The $\frac{1}{4}$ sec. cor. of secs. 3 and 4, monumented with a quartzite stone, 14x6x6 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

T1N R25E

$$\frac{1}{4} \begin{array}{l} S4 \\ S3 \end{array}$$

1963

Deposit the original stone alongside the iron post.

N. $0^{\circ}04'$ W., beginning new measurement.

Asc. 80 ft. over rolling S. slope through heavy sagebrush.

40.68 The cor. of secs. 3, 4, 33 and 34, on the N. bdy. of the Tp., monumented with an iron post, $2\frac{1}{2}$ ins. diam., set, mkd. and witnessed as described in the official record.

Land, rolling.

Soil, sandy clay.

Timber, scattering juniper on S. 10.00 chs.

Undergrowth, sagebrush and shadscale.

Dependent Resurvey of the Subdivision of T. 1 N., R. 25 E.

CHAINS

From the standard cor. of secs. 34 and 35, on the S. bdy. of the Tp., previously described.

N. 0°13' E., bet. secs. 34 and 35.

Over mountainous land through dense juniper, pinon, and mahogany; desc. 120 ft. over NW. slope.

- 1.50 Top of ledge, 50 ft. high, bears E. and W.
- 7.33 Leave timber; thence across bottom of wide draw through heavy sagebrush.
- 20.00 Trail road, bears E. and W.
- 21.50 Wash in bottom of draw, 3 ft. deep, 10 lks. wide, drains W.; continue across bottom of draw.
- 34.30 Enter dense juniper and pinon; timber is dead, having been destroyed by fire; asc. 140 ft. over rocky SW. slope.
- 40.12 Point selected for the witness $\frac{1}{2}$ sec. cor. of secs. 34 and 35; true point for the cor. falls on a ledge and an iron post cannot be perpetuated.
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 4 ins. in the ground, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T1N R25E

$\frac{1}{2}$
 S34 | S35
 W C
 1963

- 40.13 The $\frac{1}{2}$ sec. cor. of secs. 34 and 35, which is an "X" mkd. on a stationary sandstone, 8x5x3 ft. above the ground; the original bearing trees have been destroyed by fire.

N. 0°08' E., beginning new measurement.

Asc. 560 ft. over SW. slope through burned juniper and pinon.

- 20.20 Ridge, bears NE. and SW.; leave burned area; thence by triangulation; desc. 600 ft. over broken NW. slope.
- 40.54 The cor. of secs. 26, 27, 34 and 35, monumented with a sandstone, 14x8x4 ins., set, mkd. and witnessed as described in the official record.

From which the original bearing trees:

A mahogany, 7 ins. diam., bears N. 86°26' E.,
 23 lks. dist., mkd. T1N R25E S26 BT.
 A pinon, 8 ins. diam., bears S. 21°40' E.,
 20 lks. dist., mkd. T1N R25E S35 BT.
 A pinon, 8 ins. diam., bears S. 35°53' W.,
 70 lks. dist., mkd. T1N R25E S34 BT.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

Dependent Resurvey of the Subdivision of T. 1 N., R. 25 E.

T1N R25E

S27 | S26

S34 | S35

1963

Deposit the original stone alongside the iron post.

Land, mountainous.

Soil, rocky.

Timber, juniper, pinon and mahogany.

Undergrowth, sagebrush.

From the cor. of secs. 27, 28, 33 and 34, previously described.

S. 89°49' E., bet. secs. 27 and 34.

Over mountainous land; asc. 195 ft. over NW. slope through heavy sagebrush.

28.70 Enter dense juniper and pinon.

40.39 The $\frac{1}{4}$ sec. cor. of secs. 27 and 34, monumented with a sandstone, 15x6x4 ins., set, mkd. and witnessed as described in the official record.

From which the original bearing trees:

A pinon, 8 ins. diam., bears S. 11°15' W.,
176 lks. dist., mkd. $\frac{1}{4}$ S34 BT.

A pinon, 9 ins. diam., bears N. 87°33' W.,
101 lks. dist., mkd. $\frac{1}{4}$ S27 BT.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

T1N R25E

 $\frac{1}{4}$ S27

S34

1963

Deposit the original stone alongside the iron post.

S. 89°53' E., beginning new measurement.

By triangulation; asc. 360 ft. over NW. slope.

40.30 The cor. of secs. 26, 27, 34 and 35, previously described.

Land, mountainous.

Soil, sandy loam and rocky.

Timber, juniper and pinon.

Undergrowth, sagebrush.

S. 89°53' E., bet. secs. 26 and 35.

Over mountainous land through dense juniper and pinon; by triangulation; asc. 400 ft. over broken NW. slope.

40.05 The $\frac{1}{4}$ sec. cor. of secs. 26 and 35, monumented with a sandstone, 15x8x6 ins., set, mkd. and witnessed as described in the official record.

Dependent Resurvey of the Subdivision of T. 1 N., R. 25 E.

CHAINS

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T1N R25E
¼ S26
S35
1963

Deposit the original stone alongside the iron post.

S. 89°21' E., beginning new measurement.

Asc. 160 ft. over NW. slope.

5.35 Spur, projects N.; thence by triangulation; asc. 50 ft. over broken NW. slope.

24.14 Ridge, bears NE. and SW.; desc. 400 ft. over SE. slope.

39.66 The original closing cor. of secs. 26 and 35, which is a pinon, 12 ins. diam., mkd. as described in the official record.

I destroy all marks on the tree and remark "AM".

39.83 Intersect the Utah-Colorado State Line.

Point for the closing cor. of secs. 26 and 35.

Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T1N | C
R25E | O
L
S26 | O
CC — | R
S35 | A
D
O
1963

From this cor., the 262 Mi. Cor. on the Utah-Colorado State Line bears S. 0°37' W., 19.69 chs. dist., and is monumented with an iron post, 2½ ins. diam., set, mkd. and witnessed as described in the field notes of the 1963 retracement of the Utah-Colorado State Line.

Land, mountainous.
Soil, rocky.
Timber, juniper and pinon.
Undergrowth, sagebrush.

From the cor. of secs. 26, 27, 34 and 35, previously described.

N. 0°15' E., bet. secs. 26 and 27.

Over mountainous land through dense juniper and pinon; by triangulation; desc. 300 ft. over NW. slope.

19.00 Dirt road, unimproved, bears E. and W.

21.00 Bottom of draw, drains W.; asc. 180 ft. over SW. slope.

Re-survey of the Subdivision of T. 1 N., R. 25 E.

40.63

The $\frac{1}{4}$ sec. cor. of secs. 26 and 27, monumented with a sandstone, 19x10x7 ins., set, mkd. and witnessed as described in the official record.

From which the original bearing trees:

A pinon, 12 ins. diam., bears N. 40°53' E.,
28 lks. dist., mkd. $\frac{1}{4}$ S26 BT.

A pinon, 14 ins. diam., bears S. 75°30' W.,
32 lks. dist., mkd. $\frac{1}{4}$ S27 BT.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 4 ins. in the ground, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T1N R25E

$\frac{1}{4}$
S27 | S26
1963

Deposit the original stone alongside the iron post.

N. 0°07' E., beginning new measurement.

Continue by triangulation; asc. 200 ft. over broken SW. slope.

8.70

Spur, projects SW.

29.60

Rocky spur, projects W.; desc. 260 ft. over NW. slope.

39.99

The cor. of secs. 22, 23, 26 and 27, monumented with a sandstone, 20x8x8 ins., set, mkd. and witnessed as described in the official record.

From which the original bearing trees:

A pinon, 8 ins. diam., bears N. 72°16' E.,
32 lks. dist., mkd. T1N R25E S23 BT.

A pinon, 6 ins. diam., bears S. 13°33' E.,
36 lks. dist., mkd. T1N R25E S26 BT.

A pinon, 7 ins. diam., bears N. 26°15' W.,
11 lks. dist., mkd. T1N R25E S27 BT.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 4 ins. in the ground, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T1N R25E

S22 | S23
S27 | S26
1963

Deposit the original stone alongside the iron post.

Land, mountainous.

Soil, rocky.

Timber, juniper and pinon.

Undergrowth, sagebrush.

From the cor. of secs. 21, 22, 27 and 28, previously described.

S. 85°31' E., bet. secs. 22 and 27.

Dependent Resurvey of the Subdivision of T. 1 E., R. 25 E.

CRABS

SECTION

Over mountainous land through dense pinon and juniper; by triangulation; asc. 160 ft. over SW. slope.

33.00 Head of draw, drains SW.; asc. 240 ft. over NW. slope.

42.89 The $\frac{1}{4}$ sec. cor. of secs. 22 and 27, monumented with a sandstone, 20x11x10 ins., set, mkd. and witnessed as described in the official record.

From which the original bearing trees:

A pinon, 8 ins. diam., bears N. 75°15' E., 31 lks. dist., mkd. $\frac{1}{4}$ S22 ET.

A pinon, 12 ins. diam., bears S. 73° W., 8 lks. dist., mkd. $\frac{1}{4}$ S27 ET.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 8 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T1N R25E

$\frac{1}{4}$ S22
S27

1963

Deposit the original stone alongside the iron post.

N. 89°59' E., beginning new measurement.

By triangulation; asc. 160 ft. over NW. slope.

4.00 Ridge, bears NE. and SW.; desc. 500 ft. over SE. slope.

31.50 Draw, drains SW.; asc. 100 ft. over NW. slope.

38.69 The cor. of secs. 22, 23, 26 and 27, previously described.

Land, mountainous.

Soil, rocky.

Timber, juniper and pinon.

Undergrowth, sagebrush.

S. 89°45' E., bet. secs. 23 and 26.

Over mountainous land through dense juniper, pinon and mahogany; by triangulation; asc. 680 ft. over NW. slope.

27.00 Spur, projects SW.; asc. 180 ft. over W. slope.

38.48 The $\frac{1}{4}$ sec. cor. of secs. 23 and 26, monumented with a sandstone, 24x14x4 ins., set, mkd. and witnessed as described in the official record.

From which the original bearing trees:

A juniper, 20 ins. diam., bears N. 0°34' E., 36 lks. dist., mkd. $\frac{1}{4}$ S23 ET.

A juniper, 8 ins. diam., bears S. 18°45' W., 54 lks. dist., mkd. $\frac{1}{4}$ S27 ET.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 5 ins. in the ground to bedrock, and in a mound of stone, 5 ft. base to top, with brass cap mkd.

Dependent Resurvey of the Subdivision of T. 1 N., R. 25 E.

T1N R25E

 $\frac{1}{2}$ S23

S26

1963

Deposit the original stone alongside the iron post.

S. 89°50' E., beginning new measurement.

Asc. 85 ft. over W. slope.

16.00 Top of flat ridge, bears N. 80° W. and S. 80° E.; desc. 470 ft. over NE. slope, changing to E. slope.

41.81 Intersect the Utah-Colorado State Line.

The closing cor. of secs. 23 and 26, monumented with a sandstone, 20x10x3 ins., set and mkd. as described in the official record; there is no remaining evidence of the original bearing trees.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T1N	R25E
S23	C
CC —	O
S26	L
	O
	1963

Deposit the original stone alongside the iron post.

From this cor., the 263 Mi. Cor. on the Utah-Colorado State Line, bears S. 0°17' E., 20.61 lks. dist., and is monumented with an iron post, 2½ ins. diam., set, mkd. and witnessed as described in the field notes of the 1963 retracement of the Utah-Colorado State Line.

Land, mountainous.

Soil, rocky.

Timber, juniper, pinon and mahogany.

Undergrowth, sagebrush.

From the cor. of secs. 22, 23, 26 and 27, previously described.

N. 0°04' E., bet. secs. 22 and 23.

Over mountainous through dense juniper, pinon and mahogany; by triangulation; desc. 60 ft. over NW. slope.

8.00 Head of draw, drains SW.; asc. 600 ft. over SE. slope.

39.73 The ½ sec. cor. of secs. 22 and 23, monumented with a sandstone, 20x10x5 ins., set, mkd. and witnessed as described in the official record.

From which the original bearing trees:

A pinon, 22 ins. diam., bears N. 75°30' E., 27 lks. dist., mkd. ½ S23 BT.

A pinon, 12 ins. diam., bears S. 32° W., 4 lks. dist., mkd. ½ S22 BT.

Dependent Resurvey of the Subdivision of T. 1 N., R. 25 E.

CHAINS

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T1N R25E

¼
S22 | S23
1963

Deposit the original stone alongside the iron post.

N. 7°56' W., beginning new measurement.

Asc. 20 ft. over SE. slope.

5.00 Ridge, bears NE. and SW.; desc. 1120 ft. over broken NW. slope.

40.35 Point for the cor. of secs. 14, 15, 22 and 23 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 2 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T1N R25E

S15 | S14
S22 | S23
1963

Land, mountainous.

Soil, rocky.

Timber, juniper, pinon and mahogany.

Undergrowth, sagebrush.

From the cor. of secs. 15, 16, 21 and 22, previously described.

S. 87°01' E., bet. secs. 15 and 22.

Over mountainous land through dense juniper and pinon; by triangulation; asc. 80 ft. over SW. slope, changing to S. slope.

10.00 Draw, drains SW.; asc. 380 ft. over NW. slope.

40.54 Point for the ¼ sec. cor. of secs. 15 and 22 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 4 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T1N R25E

¼ S15
S22
1963

Asc. gradually to top of ridges.

41.50 Ridge, bears N. and S.; continue by triangulation; desc. 1000 ft. over broken NE. slope.

75.00 Head of canyon, drains NE.; asc. 80 ft. over NW. slope.

Dependent Resurvey of the Subdivision of T. 1 N., R. 25 E.

CHAINS

81.08 The cor. of secs. 14, 15, 22 and 23, previously described.

Land, mountainous.
Soil, rocky.
Timber, juniper and pinon.
Undergrowth, sagebrush.

N. 88°05' E., bet. secs. 14 and 23,

Over mountainous land through dense juniper and pinon;
by triangulation; asc. 640 ft. over NW. slope.

40.37 The $\frac{1}{2}$ sec. cor. of secs. 14 and 23, which is an "X" mkd. on a sandstone ledge, and $\frac{1}{2}$ mkd. N. of cor. point.

From which the original bearing trees:

A pinon, 8 ins. diam., bears N. 60°10' E.,
49 lks. dist., mkd. $\frac{1}{2}$ S14 BT.
A pinon, 7 ins. diam., bears S. 32°30' W.,
20 lks. dist., mkd. $\frac{1}{2}$ S23 BT.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., on solid rock and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T1N R25E

$\frac{1}{2}$ $\frac{S14}{S23}$
1963

S. 87°27' E., beginning new measurement.

Asc. gradually to top of ridge.

5.00 Ridge, bears SW. and E.; thence by triangulation; desc. 360 ft. over NE. slope.

44.98 Intersect the Utah-Colorado State Line.

The closing cor. of secs. 14 and 23 on the Utah-Colorado State Line, monumented with a sandstone, 17x10x3 ins., set, mkd. and witnessed as described in the official record.

From which the original bearing trees:

A pinon, 12 ins. diam., bears S. 59°15' W.,
48 lks. dist., mkd. T1N R25E S23 CC BT.
A pinon, 10 ins. diam., bears N. 49°50' W.,
33 lks. dist., mkd. T1N R25E S14 CC BT.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., on solid rock and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T1N R25E
S14 C
CC ——— O
S23 L
O

1963

Dependent Resurvey of the Subdivision of T₁N R₂₅E

CHAINS

Deposit the original stone alongside the iron post.

From this cor., the witness cor. to M₁ Cor. 264 on the Utah-Colorado State Line, bears S. 0°20' E., 1.23 chs. dist., and is monumented with an iron post, 2½ ins. diam. set, mkd. and witnessed as described in the 1963 retracement of the Utah-Colorado State Line.

Land, mountainous.
Soil, rocky.
Timber, juniper and pinon.
Undergrowth, sagebrush.

From the cor. of secs. 14, 15, 22 and 23, previously described.

N. 1°53' E., bet. secs. 14 and 15.

Over mountainous land through dense juniper and pinon; by triangulation; desc. 400 ft. over NW. slope.

23.00 Canyon, drains NE.; desc. 40 ft. over NE. slope.

39.98 The ¼ sec. cor. of secs. 14 and 15, monumented with a sandstone, 12x8x2 ins., set, mkd. and witnessed as described in the official record.

From which, an original bearing tree.

A juniper, 11 ins. diam., bears S. 81°45' W.,
21 lks. dist., mkd. ½ S15 BT.
There is no remaining evidence of the other
bearing tree.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T1N R25E

½
S15 | S14
1963

Deposit the original stone alongside the iron post.

N. 0°15' W., beginning new measurement.

Continue by triangulation; desc. 100 ft. over NE. slope.

13.00 Spur, projects NE.; desc. 220 ft. over NW. slope.

39.92 The cor. of secs. 10, 11, 14 and 15, monumented with a sandstone, 15x10x3 ins., set, mkd. and witnessed as described in the official record.

From which the original bearing trees:

A pinon, 8 ins. diam., bears N. 71°30' E.,
38 lks. dist., mkd. T1N R25E S11 BT.
A pinon, 6 ins. diam., bears S. 58° E., 67
lks. dist., mkd. T1N R25E S14 BT.
A pinon, 6 ins. diam., bears S. 24°30' W.,
66 lks. dist., mkd. T1N R25E S15 BT.

At the cor. point

Dependent Resurvey of the Subdivision of T. 1 N., R. 25 E.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

T1N R25E
 S10|S11
 S15|S14
 1963

Deposit the original stone alongside the iron post.

Land, mountainous.
 Soil, rocky.
 Timber, juniper and pinon.
 Undergrowth, sagebrush.

From the cor. of secs. 9, 10, 15 and 16, previously described.

S. 83°51' E., bet. secs. 10 and 15.

Over rolling land through scattering juniper and pinon; desc. 180 ft. over SE. slope.

15.90 Crouse Creek, 6 ins. deep, 8 lks. wide, course NE.; asc. 50 ft. over NW. slope.

28.50 Dirt road, graded, bears NE. and SW.; enter cultivated field; thence along gentle N. slope.

41.08 The ½ sec. cor. of secs. 10 and 15 as recognized by present and previous land owners; this point is monumented with an iron peg, 2 ft. long, 1 in. diam., 18 ins. in the ground and in a mound of stone; this is accepted as the best available evidence of the original position of the cor.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T1N R25E
 ½ S10
 S15
 1963

S. 89°47' E., beginning new measurement.

Over cultivated field.

39.50 Leave field.

39.96 The cor. of secs. 10, 11, 14 and 15, previously described

Land, rolling and gently rolling.
 Soil, sandy clay.
 Timber, juniper and pinon on W. 28.00 chs.
 Undergrowth, sagebrush on W. 28.00 chs.

N. 89°56' E., bet. secs. 11 and 14.

Over rolling land through scattering juniper and pinon; by triangulation.

10.00 Draw, drains N., irregularly.

Dependent Resurvey of the Subdivision of T. 1 N., R. 25 E.

CHAINS
39.87

The 1/4 sec. cor. of secs. 11 and 14, monumented with a sandstone, 20x6x3 ins., set, mkd. and witnessed as described in the official record.

From which the original bearing trees:

- A pinon, 12 ins. diam., bears S. 28°50' E., 24 lks. dist., mkd. 1/2 S14 BT.
- A pinon, 14 ins. diam., bears N. 58° W., 25 lks. dist., mkd. 1/2 S11 BT.

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 8 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T1N R25E
 1/2 S11
 S14
 1963

Deposit the original stone alongside the iron post.

N. 89°34' E., beginning new measurement.

Continue by triangulation; asc. 340 ft. over N. slope, changing to NW. slope.

35.00 Spur, projects N.; desc. 200 ft. over NE. slope.

43.73 Intersect the Utah-Colorado State Line.

True point for the closing cor. of secs. 11 and 14 on the Utah-Colorado State Line falls on inaccessible ledges and cannot be perpetuated.

From this point, the witness cor. for the closing cor. of secs. 11 and 14 bears S. 0°20' E., 5.95 chs. dist., and is an "X" mkd. on a sandstone ledge and witnessed as described in the official record.

From which the original bearing tree:

- A pine, 10 ins. diam., bears N. 62°15' W., 30 lks. dist., mkd. T1N R25E S14 WC CC BT.

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., on solid rock and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T1N R25E
 S11 | C
 WCC—| O
 S14 | L
 | O
 1963

From the true point for the closing cor. of secs. 11 and 14, the witness cor. to the 265 Mi. Cor. on the Utah-Colorado State Line bears N. 0°20' W., 17.26 chs. dist., and is monumented with an iron post, 2 1/2 ins. diam., set, mkd. and witnessed as described in the field notes of the 1963 retracement of the Utah-Colorado State Line.

Dependent Resurvey of the Subdivision of T. 1 N., R. 25 E.

CHAINS

Land, rolling and mountainous.
Soil, rocky.
Timber, juniper and pinon and scattering pine.
Undergrowth, sagebrush.

From the cor. of secs. 10, 11, 14 and 15, previously described.

N. 0°03' E., bet. secs. 10 and 11.

Over rolling land through scattering juniper and sagebrush; desc. 80 ft. over N. slope.

30.30 Small draw, drains NE.

34.50 Fence, 4 strand, barbed wire, bears NW. and SE.

40.27 Point for the $\frac{1}{2}$ sec. cor. of secs. 10 and 11 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 26 ins. in the ground, and in a collar of stone, with brass cap mkd.

T1N R25E

$\frac{1}{2}$
S10|S11
1963

Continue over rolling N. slope.

60.80 Trail road, bears E. and W.

64.10 Low ridge, bears E. and W.; desc. 125 ft. over steep N. slope.

72.60 Bottom of desc.; dirt road, graded, bears E. and W.; thence over nearly level bottom land.

72.80 Fence, 2 strand, barbed wire, bears E. and W.

80.39 Fence, net wire, bears NW. and SE.

80.54 Point for the cor. of secs. 2, 3, 10 and 11 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 22 ins. in the ground, with brass cap mkd.

T1N R25E

S3|S2
S10|S11
1963

Set a cedar post, 8 ft. long, 6 ins. diam., 2 ft. in the ground alongside the iron post.

Land, rolling.
Soil, sandy clay.
Timber, scattering juniper.
Undergrowth, sagebrush.

From the cor. of secs. 3, 4, 9 and 10, previously described.

N. 89°42' E., bet. secs. 3 and 10.

Dependent Resurvey of the Subdivision of T. 1 N., R. 25 E.

CHAINS

- Asc. 20 ft. over W. slope of spur.
- 2.10 Spur, projects S.; desc. 150 ft. over broken SE. slope.
- 11.50 Draw, drains SE.
- 15.00 Spur, projects SE.
- 20.59 Left bank of Green River, course NE., banks 6 ft. high, water at present low stage.

Point for the meander cor. of secs. 3 and 10; at proportionate distance; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.

T1N	
R25E	
S3	/ MC
S10	
1963	
- 26.98 Thence across Green River.

Point for meander cor. secs. 3 and 10, at proportionate distance, falls in river.
- 30.03 Right bank of Green River.

Point for the meander cor. of secs. 3 and 10.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

T1N	
R25E	
S3	/ MC
S10	
1963	
- 40.48 Thence over nearly level bottom land.

Point for the ¼ sec. cor. of secs. 3 and 10 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

T1N R25E	
¼	/ S3
	S10
1963	
- 47.20 Continue over nearly level bottom land.
- 47.20 Wash, 10 ft. deep, 30 lks. wide, drains N.
- 49.70 Fence, net wire, bears N. and S.; enter farm land.
- 67.00 Crouse Creek, 8 ins. deep, 8 lks. wide, course NE.
- 79.83 Fence, net wire, bears NW. and SE.; continue across swampy meadow.
- 80.96 The cor. of secs. 2, 3, 10 and 11, previously described.

Dependent Resurvey of the Subdivision of T. 1 N., R. 25 E.

CHAINS

Land, rolling on W. side of river; nearly level on E. side of river.
Soil, sandy clay.
Timber, none.
Undergrowth, sagebrush W. of river; willows along river banks.

S. 89°52' E., bet. secs. 2 and 11.

Over nearly level land through swampy meadow.

32.90 Leave meadow; enter dense willows.

38.55 Right bank of Green River, course SE., sloping banks 6 ft. high, water at present low stage.

Point for the meander cor. of secs. 2 and 11 at proportionate dist. falls at this point; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

T1N
R25E
S2 / MC
S11 /
1963

Thence across Green River.

40.58 Point for the ¼ sec. cor. of secs. 2 and 11 at proportionate dist. falls on a sand bar in the Green River; this point is below the normal water line and appears only because of the extremely low water stage at this time.

50.28 Left bank of Green River, at normal high water level.

Point for the meander cor. of secs. 2 and 11 at proportionate dist. falls at this point; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

T1N
R25E
MC / S2
S11 /
1963

Thence over nearly level bottom land through heavy sagebrush.

51.00 Irrigation ditch, course SE.

82.98 Intersect the Utah-Colorado State Line.

The closing cor. of secs. 2 and 11, monumented with a sandstone, 10x5x5 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Dependent Resurvey of the Subdivision of T. 1 N., R. 25 E.

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T1N		C
R25E		O
		L
S2		O
GC	—	R
S11		A
		D
		O
		1963

Deposit the original stone alongside the iron post.

From this cor., the 266 Mi. Cor. on the Utah-Colorado State Line, bears N. 0°23' W., 1.18 chs. dist., and is monumented with an iron post, 2½ ins. diam., set, mkd. and witnessed as described in the field notes of the 1963 retracement of the Utah-Colorado State Line.

Land, nearly level bottom land.
Soil, sandy clay.
Timber, none.
Undergrowth, willows along river banks; sagebrush E. of river.

From the cor. of secs. 2, 3, 10 and 11, previously described.

N. 0°38' W., bet. secs. 2 and 3.

Over nearly level bottom land across grassy meadow.

17.43 Fence, net wire, bears NE. and SW.; leave meadow; continue over level bottom land.

19.00 Irrigation ditch, course E.

22.80 Enter dense willows.

23.16 Right bank of Green River, course S. 89° E., banks 6 ft. high, water at present low stage.

Point for the meander cor. of secs. 2 and 3 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground, and in a collar of stone, with brass cap mkd.

	M	G
	S3	S2
T1N	R25E	
		1963

Thence across Green River.

35.92 Point for the meander cor. of secs. 2 and 3 for the left bank of the river at proportionate dist. falls in the river.

37.78 Left bank of Green River at present mean high water.

Point selected for the witness meander cor. of sec. 2. This point now also functions as the meander cor. for sec. 3. There is no remaining evidence of the original

Dependent Resurvey of the Subdivision of T. 1 N., R. 25 E.

CHAINS

cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

T1N R25E
S3|S2
WMC
1963

Thence over nearly level bottom land through scattering sagebrush.

40.27

The ¼ sec. cor. of secs. 2 and 3, monumented with a sandstone, 15x10x6 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

T1N R25E
¼
S3|S2
1963

Deposit the original stone alongside the iron post.

N. 0°06' W., beginning new measurement.

Over nearly level bottom land through scattering sagebrush.

5.80

Base of asc., bears E. and W.; leave bottom land; asc. 275 ft. over broken S. slope.

10.80

Spur, projects SE.

14.20

Small draw, drains SE.

17.20

Spur, projects SE.

24.70

Wash, 5 ft. deep, 20 lks. wide, drains SE.

28.80

Top of steep asc.; enter scattering juniper; thence over gentle S. slope.

40.52

The cor. of secs. 2, 3, 34 and 35, on the N. bdy. of the Tp., monumented with an iron post, 2½ ins. diam., set, mkd. and witnessed as described in the official record.

Land, nearly level river bottom, S. 46.00 chs.; broken and rolling on remainder.
Soil, sandy clay.
Timber, scattering juniper on N. 12.00 chs.
Undergrowth, willows along river; sagebrush N. of river.

Present Meanders of the Left Bank of the Green River

Note: The present river banks of the Green River were meandered as a basis for new lottings and area of vacant public lands bordering the river, and only as a traverse line for topographic purposes fronting non-public lands.

Present Meanders of the Left Bank of the Green River

CHAINS

Through sections 5, 6, 7 and 8, the river closely agrees with the original survey showing and therefore, in accordance with the special instructions, the river was not re-meandered through this part of the township.

From the meander cor. of secs. 8 and 9 on the left bank of the Green River.

Thence downstream with meanders of the left bank in section 9.

S. 79°00' E., 5.60 chs.

East, 6.00 chs.

S. 75°45' E., 2.50 chs.

S. 78°30' E., 7.00 chs.

S. 75°00' E., 4.80 chs.

S. 79°00' E., 5.10 chs.

S. 69°00' E., 14.00 chs.

S. 74°15' E., 6.00 chs.

S. 66°45' E., 7.50 chs.

S. 75°15' E., 2.90 chs.

S. 81°45' E., 5.70 chs.

N. 87°30' E., 1.50 chs.

N. 70°07' E., 15.28 chs. to meander cor. of secs. 9 and 10 on the left bank of river.

Land, rocky precipitous canyon.

Soil, rocky.

Timber, juniper and pinon.

Undergrowth, willows.

Thence in section 10.

N. 73°00' E., 7.10 chs.

N. 59°30' E., 5.40 chs.

N. 54°00' E., 4.30 chs., leave canyon, enter bottom land.

N. 58°00' E., 4.30 chs., enter willows.

N. 37°00' E., 3.30 chs. to meander cor. of secs. 3 and 10 on the left bank of river.

Land, rocky canyon to bottom land.

Soil, rocky to sandy.

Timber, juniper and pinon.

Undergrowth, willows.

Thence in section 3.

N. 42°30' E., 12.40 chs.

N. 50°45' E., 11.20 chs., at 10.10 chs. Willow Creek 6 ins. deep, 10 lks. wide, drains into the Green River.

Meanders of the Left Bank of the Green River

CHAINS

N. 61°15' E., 5.30 chs.

N. 42°00' E., 9.00 chs.

N. 47°30' E., 4.70 chs.

N. 56°00' E., 4.05 chs.

N. 65°30' E., 17.50 chs.

S. 89°49' E., 9.46 chs., to the witness meander cor. of
secs. 2 and 3 on the left
bank of river.

Land, nearly level river bottom.

Soil, sandy clay.

Timber, scattered juniper.

Undergrowth, willows.

Thence in section 2.

East, 10.60 chs.

S. 81°45' E., 3.70 chs.

S. 71°00' E., 7.80 chs.

S. 51°30' E., 3.00 chs.

S. 42°45' E., 8.60 chs.

S. 30°00' E., 7.00 chs.

S. 27°00' E., 4.90 chs.

S. 40°15' E., 13.00 chs.

S. 57°00' E., 3.50 chs.

S. 40°14' E., 5.70 chs., to the meander cor of secs.
2 and 11 on the left bank
of river.

Land, nearly level bottom land.

Soil, sandy clay.

Timber, none.

Undergrowth, willows.

Thence in section 11.

S. 27°00' E., 8.30 chs.

S. 20°45' E., 6.60 chs.

S. 30°00' E., 4.60 chs.

S. 55°15' E., 13.00 chs.

S. 35°15' E., 8.00 chs.

S. 28°30' E., 3.00 chs.

S. 56°15' E., 3.00 chs.

S. 43°14' E., 7.82 chs., to the witness meander cor.
of sec. 11 on the left bank
of river at the intersection
of the Utah-Colorado boundary

Meanders of the Left Bank of the Green River

CHAINS

MEANDERS

line.

Land, nearly level bottom land.
Soil, sandy clay.
Timber, none.
Undergrowth, willows.

Meanders of the Right Bank
of the Green River

From the meander cor. of secs. 8 and 9 on the right bank
of the Green River.

Thence downstream with meanders of the right bank in
section 9.

S. 84°30' E., 10.00 chs.

S. 80°15' E., 4.30 chs.

S. 76°30' E., 9.60 chs.

S. 79°00' E., 7.30 chs.

S. 71°30' E., 19.00 chs.

S. 68°00' E., 11.00 chs.

S. 83°00' E., 7.70 chs.

N. 80°30' E., 7.50 chs.

N. 59°28' E., 7.70 chs., to the meander cor. of secs.
9 and 10 on the right bank of
river.

Land, rocky precipitous canyon.
Soil, rocky.
Timber, juniper and pinon.
Undergrowth, willows.

Thence in section 10.

N. 58°15' E., 4.30 chs.

N. 62°00' E., 12.00 chs.

N. 69°00' E., 4.40 chs., leave canyon, enter bottom land.

N. 51°44' E., 14.78 chs., to the meander cor. of secs.
3 and 10 on the right bank of
river.

Land, rocky canyon to bottom land.
Soil, rocky to sandy clay.
Timber, juniper and pinon.
Undergrowth, willows.

Thence in section 3.

N. 42°30' E., 5.40 chs.

N. 49°45' E., 4.90 chs.

N. 53°00' E., 7.00 chs.

N. 49°30' E., 17.20 chs.

Meanders of the Right Bank of the Green River

CHAINS

N. 78°45' E., 12.50 chs.

S. 88°00' E., 4.30 chs., at 1.70 chs. the mouth of Crouse Creek.

S. 79°28' E., 8.21 chs. to the meander cor. of secs. 2 and 3 on the right bank of river.

Land, nearly level bottom land.

Soil, sandy clay.

Timber, scattered juniper.

Undergrowth, willows.

Thence in section 2.

S. 89°45' E., 7.00 chs.

N. 79°00' E., 5.20 chs.

S. 60°15' E., 14.10 chs.

S. 45°30' E., 8.00 chs.

S. 37°02' E., 14.53 chs. to the meander cor. of secs. 2 and 11 on the right bank of river.

Land, nearly level bottom land.

Soil, sandy clay.

Timber, none.

Undergrowth, willows.

Thence in section 11.

S. 26°30' E., 12.20 chs.

S. 37°30' E., 6.20 chs.

S. 27°00' E., 5.70 chs.

S. 49°00' E., 3.30 chs.

S. 36°00' E., 4.90 chs.

S. 46°30' E., 7.00 chs.

S. 64°30' E., 3.30 chs.

S. 31°15' E., 4.30 chs.

S. 26°45' E., 9.60 chs.

S. 59°30' E., 7.00 chs.

S. 40°02' E., 10.94 chs., intersect the Utah-Colorado boundary line on the right bank of river at a point N. 0°23' W., 3.44 chs. distance from the meander cor. for sec. 11.

Land, nearly level bottom land.

Soil, sandy clay.

Timber, none.

Undergrowth, willows.

CHAINS

SECTIONS

General Description

The land in Township 1 North, Range 25 East is generally mountainous except for the North tier of sections and sections 10 and 11. Portions of these sections are level, or nearly level, and extensive farming activity is taking place in these areas. The elevation of the township ranges from about 8000 feet above sea level in the higher peaks to about 5400 feet above sea level along the Green River. Drainage in the South 3 tiers of the township is to the center of the township to Crouse Creek, then north to the Green River. The remainder of the township drains directly into the Green River.

The soil in the higher regions is extremely rocky with vast areas of precipitous ledges and covered with dense growths of juniper, pinon and mahogany. The higher valleys have a light layer of sandy clay or loam and are generally covered with a heavy undergrowth of sagebrush. The soil along the Green River is a rich, sandy clay or loam and much of this land in sections 2, 3 and 11 is under cultivation. There is also land under cultivation in the North and East portions of section 10.

The Green River enters the township through about the middle of the North boundary of section 6, flowing in a southerly direction, turning east in the northeast corner of section 7. It then flows in an easterly direction, leaving the township through the East boundary of section 11. Willow Creek enters the township through the North boundary of section 3 and empties into the Green River in the southern portion of section 3. Crouse Creek enters the township at the corner of sections 32 and 33 on the South boundary of the township, flows in a northerly direction to the northeast corner of section 16, and turns northeast to the Green River in the southeast corner of section 2. There are numerous springs throughout the township.

A well maintained, dirt road from Vernal, Utah, to Brown's Park enters the township through the southeast corner of section 32 and follows the general course taken by Crouse Creek to the northeast corner of section 10. It then turns in a southeasterly direction, following along the south side of the Green River, and leaves the township through the southeast corner of section 11. The portion of this road in Crouse Canyon in sections 16 and 21 is extremely rough during the run-off season. There are several other trail roads providing access to the lower areas. Most of the higher areas are inaccessible by vehicle.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS

NAMES	CAPACITY
Max Assay	Transitman
Phylip Leslie	Note Keeper
Barrel Leamaster	Front Chainman
Michael Preston	Flagman
James Handy	Cornerman
Paul E. Mahler	Transitman, Crew Chief
Jerry Thomas	Note Keeper
Robert L. Gleave	Front Chainman
John Gerwel	Flagman
William Lewis	Cornerman
Ray Muniz	Axeman

CERTIFICATE OF SURVEY

I, **Fred R. Chappell**, HEREBY CERTIFY upon honor that
in pursuance of special instructions bearing date of the 25th day of **May**, 19**65**
I have dependently resurveyed the South and West boundaries and the subdivi-
sional lines of Township 1 North, Range 25 East

of the **Salt Lake** Meridian, in the State of **Utah**, which
are represented in the foregoing field notes as having been executed by me and under my direction
and that said survey has been made in strict conformity with said special instructions, the Manual
of Instructions for the Survey of the Public Lands of the United States, and in specific manner
described in the foregoing field notes.

June 21, 1965
(Date)

Fred R. Chappell
(Cadastral Surveyor)

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

SUBMITTED FOR APPROVAL
Date AUG 27 1965

BUREAU OF LAND MANAGEMENT,
Washington, D. C.

The foregoing field notes of the dependent resurvey of the South and West boundaries
and the subdivisinal lines of Township 1 North, Range 25 East,

executed by **Fred R. Chappell, Cadastral Surveyor**

having been critically examined and found correct, are hereby approved.

DEC 22 1965
(Date)

Ed Livingston
(Chief, Division of Engineering)

CERTIFICATE OF TRANSCRIPT

~~I CERTIFY That the foregoing transcript of the field notes of the above-described surveys in
, is a true copy of the original field notes.~~

~~_____
(Date)~~

~~_____
(Chief, Division of Engineering)~~

Blank

Page

Blank

Page

FIELD NOTES
OF THE

DEPENDENT RESURVEY

OF THE

SOUTH BOUNDARY

AND THE

SUBDIVISIONAL LINES

AND A PORTION

OF THE

MEANDERS OF THE GREEN RIVER

OF

TOWNSHIP 2 NORTH, RANGE 25 EAST

Of the SALT LAKE Meridian,

In the State of UTAH

EXECUTED BY

Fred R. Chappell

Cadastral Surveyor

Under special instructions dated May 25, 19 62, which provided for the surveys
included under Group Number 456, approved June 8, 1962,
and assignment instructions dated May 3, 19 63.

Survey commenced May 13, 19 63

Survey completed July 16, 19 63

DEPT. OF THE INTERIOR
BUR OF LAND MGMT

1966 FEB 18 AM 11 22 3

RECEIVED
STATE & LAND OFFICE
SALT LAKE CITY, UTAH

INDEX DIAGRAM

Township 2 North, Range 25 East

6 18	18 5 28	29 4 38	38 3 53	54 2 53	1
7 15	17 8 26	27 9 36	37 10 49	52 11 50	19
18 13	14 17 24	25 16 34	35 15 46	48 14 47	18
19 11	12 20 22	23 21 32	33 22 43	45 23 44	24
30 8	10 29 20	21 28 30	31 27 40	43 26 41	25
31 2	7 32 4	19 33 4	29 34 5	39 35 6	36

Township 2 North, Range 25 East

CHAINS

The North boundary was surveyed by A. Jessen in 1898 and concurrently resurveyed by Fred R. Chappell. The East boundary (the Utah-Colorado State Line) was surveyed by R. J. Reeves in 1878, retraced and resurveyed between the 267-279 Mile Posts by R. Clark in 1912 in connection with Colorado surveys, retraced and resurveyed between the 269-273 Mile Posts by G. Eslinger in 1937 in connection with Colorado surveys, and concurrently retraced, with the remonumentation of corners found, by Fred R. Chappell. The South 4 miles of the West boundary were surveyed by A. D. Ferron in 1878, retraced by A. Jessen in 1898, and concurrently resurveyed by Fred R. Chappell. The North 2 miles of the West boundary were surveyed by A. Jessen in 1898 and concurrently resurveyed by Fred R. Chappell. The South boundary and the subdivisional lines were surveyed by A. Jessen in 1898. The meanders of the Green River were surveyed by A. Jessen in 1898.

The following field notes are those of the dependent resurvey of the South boundary and the subdivisional lines and a partial meander of the Green River of Township 2 North, Range 25 East.

The survey was executed with a W. & L. E. Gurley transit #580538. It is equipped with a full vertical circle and improved Smith-type telescopic solar attachment, and conforms with the standard instrumental specifications of the Bureau of Land Management. The instrument was maintained in precise adjustment throughout the progress of the survey.

The direction of the lines was determined by the solar transit method.

Measurements were made with a narrow steel tape, 8 chains in length, graduated every link for the first 100 links and at intervals of 10 links thereafter. The tape was tested by comparison to a one chain standard steel tape and found to be correct. All measurements were made on the slope and the vertical angle of each interval ascertained by a clinometer in good adjustment. The horizontal equivalents alone are entered in the field note record. The lengths of all lines were determined by chaining where possible; otherwise, by traverse or triangulation. The details of such traverses and triangulations have been thoroughly verified; and in order to simplify the record, the details of such traverses and triangulations have been omitted from these field notes. Distances to topography on lines run by traverse or triangulation are approximately as scaled from U.S.G. S. topographic sheets.

The geographic position of the southeast corner of the township is at latitude $40^{\circ}51'31.0''$ N. and longitude $109^{\circ}02'53.4''$ W., as determined from section line ties made to U.S.C. & G.S. triangulation station "UCOLWY", which is identical to the NE. corner of Township 3 North, Range 25 East, Utah.

The magnetic declination was read at a number of stations throughout the township and the average of these readings was found to be $16^{\circ}45'$ E.

The present meanders of the Green River shown in the following field notes were scaled from U.S.G.S. quadrangle sheets Warren Draw and Clay Basin as provided by the special instructions for Group 456, Utah.

CHAINS

The changes in the positions of the river which have taken place since the original survey of 1898 are the result of erosive and accretive action rather than evulsive, so that ownership of shore lands have moved with the changing river position.

Dependent Resurvey of the South Boundary
of
Township 2 North, Range 25 East

Reestablishment of the Survey Executed
by A. Jessen in 1898.

Beginning at the cor of Tps. 1 and 2 N., Rs. 24 and 25 E., which is monumented with an iron post, 2½ ins. diam., set, mkd. and witnessed as described in the official record.

N. 89°45' E., bet. secs. 6 and 31.

Over rolling land through scattering juniper and sagebrush.

Desc. 120 ft. over NE. slope.

17.90 Barbed wire fence, 3 strand, bears N. and S.

27.15 Power line, 4 wire, bears N. 26°30' W., and S. 26°30' E.

27.64 Point selected for the witness meander cor. of secs. 6 and 31 on the right bank of Green River.

Set an iron post, 30 ins long, 2½ ins. diam., on solid sandstone and in a mound of stone, 5 ft. base to top, with brass cap mkd.

T2N R25E
S31 / WMC
S6
T1N
1963

27.73 Right bank of Green River, course S. 20° E.

The meander cor. of secs. 6 and 31, which is an "X" mkd. on the edge of a ledge 90 ft. high, bearing N. and S., where an iron post cannot be perpetuated.

From which the original bearing tree:

A juniper, 10 ins. diam., bears S. 86°30' W., 65 lks. dist., mkd. T1N R25E S6 MC BT.
There is no remaining evidence of the other bearing tree.

S. 89°23' E., beginning new measurement.

Thence across Green River.

4.40 Left bank of Green River; ledge 80 ft. high, bears N. and S.

4.48 Point selected for the witness meander cor. of secs. 6 and 31.

Set an iron post, 30 ins. long, 2½ ins. diam., on solid sandstone and in a mound of stone, 5 ft. base to top, with brass cap mkd.

Boundary Recovery of the South Boundary of T. 2 N., R. 25 E.

T2N R25E
 WMC ~~S31~~
 186
 TIN
 1963

4.57

The meander cor. of secs. 6 and 31, which is an "X" mkd. on a sandstone ledge, and an iron post cannot be perpetuated.

From which the original bearing tree:

A juniper, 10 ins. diam., bears N. 57°45' W.,
 50 lks. dist., mkd. T2N R25E S31 MC BT.

N. 89°41' E., beginning new measurement.

Asc. gradually over ledges.

7.24

The $\frac{1}{2}$ sec. cor. of secs. 6 and 31, monumented with a quartzite stone, 12x9x3 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 12 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T2N R25E
~~S31~~
 186
 TIN
 1963

Deposit the original stone alongside the iron post.

N. 89°49' E., beginning new measurement.

Asc. 100 ft. over SW. ledgy slope through scattering juniper.

8.00

Wash, 15 ft. deep, 1.50 chs. wide, drains SW.

21.80

Top of asc.; leave juniper, enter heavy sagebrush, thence across nearly level bench land.

40.43

The cor. of secs. 5, 6, 31 and 32, monumented with a quartzite, 16x10x6 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T2N R25E
 S31 | S32
 86 | 85
 TIN
 1963

Deposit the original stone alongside iron post, and raise a mound of stone, 3 ft. base, 2 $\frac{1}{2}$ ft. high, W. of cor.

Land, rolling and broken.

Dependent Resurvey of the South Boundary of T. 2 N., R. 25 E.

CHAINS

Soil, sandy clay and rotky.
 Timber, scattering juniper.
 Undergrowth, sagebrush, shadscale and grass.

N. 89°50' E., bet. secs. 5 and 32.

Over nearly level bench land through scattering sagebrush and shadscale; asc. gradually.

40.28 The $\frac{1}{2}$ sec. cor. of secs. 5 and 32, monumented with a quartzite stone, 17x8x4 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T2N R25E

$\frac{1}{2}$ S32

S5

T1N

1963

Deposit the original stone alongside the iron post.

N. 89°58' E., beginning new measurement.

Continue over nearly level bench land.

40.21 The cor. of secs. 4, 5, 32 and 33, monumented with a quartzite stone, 18x10x6 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T2N R25E

S32 | S33

S5 | S4

T1N

1963

Deposit the original stone alongside the iron post, and raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Land, nearly level.

Soil, sandy clay.

Timber, none.

Undergrowth, sagebrush and shadscale.

N. 89°49' E., bet. secs. 4 and 33.

Over gently rolling bench land through heavy sagebrush and shadscale.

4.30 Wash, 4 ft. deep, 30 lks. wide, drains S.

40.07 The $\frac{1}{2}$ sec. cor. of secs. 4 and 33, monumented with a quartzite stone, 14x10x8 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Dependent Resurvey of the South Boundary of T. 2 N., R. 25 E.

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

T2N R25E

$$\frac{1}{4} \frac{S33}{S4}$$

T1N

1963

Deposit the original stone alongside the iron post.

N. $89^{\circ}55'$ E., beginning new measurement.

Continue over gently rolling land.

- 7.80 Dirt road, unimproved, bears NW. and SE.
 13.80 Wash, 6 ft. deep, 20 lks. wide, drains S. 20° E.
 27.40 Dirt road, unimproved, bears NE. and SW.
 40.17 The cor. of secs. 3, 4, 33 and 34, monumented with a quartzite stone, 15x8x6 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 25 ins. in the ground, and in a collar of stone, with brass cap mkd.

T2N R25E

$$\frac{S33 | S34}{S4 | S3}$$

T1N

1963

Deposit the original stone alongside the iron post.

Land, gently rolling.

Soil, sandy clay.

Timber, none.

Undergrowth, sagebrush and shadscale.

N. $89^{\circ}50'$ E., bet. secs. 3 and 34.

Over rolling desert land through heavy sagebrush and shadscale; desc. 100 ft. over E. slope.

- 6.85 Power line, 4 wire, bears N. 11° W. and S. 11° E.
 7.90 Dirt road, unimproved, bears N. and S.
 8.90 Fence, net wire, bears N. 11° W. and S. 11° E.
 20.00 Willow Creek, 6 ins. deep, 10 lks. wide, course S.; asc. over gentle W. slope.
 21.00 Enter cultivated land.
 28.70 Dirt road, unimproved, bears N. and S.; leave cultivated land; thence over rolling desert land through scattering sagebrush and shadscale; asc. 60 ft. over W. slope.
 31.65 Top of asc., bears N. and S., thence across nearly level land.

Dependent Resurvey of the South Boundary of T. 2 N., R. 25 E.

CHAINS

40.22 The $\frac{1}{2}$ sec. cor. of secs. 3 and 34, monumented with a quartzite stone, 16x9x7 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

T2N R25E

$\frac{1}{2}$ S34
S3

T1N

1963

Deposit the original stone alongside the iron post.

N. $89^{\circ}41'$ E., beginning new measurement.

Over nearly level land through heavy sagebrush and shadscale.

2.80 W. rim of small canyon, bears NE. and SW.; desc. 90 ft. over E. slope.

5.70 Bottom of canyon, drains SW.; asc. 70 ft. over W. slope.

10.60 Fence, net wire, bears N. and S.

10.80 E. rim of canyon, bears E. and SW.; thence along N. slope.

23.90 Wash, 7 ft. deep, 80 lks. wide, drains N.; asc. 50 ft. over NW. slope.

29.70 Wash, 6 ft. deep, 60 lks. wide, drains N. 60° W.

40.32 The cor. of secs. 2, 3, 34 and 35, monumented with a sandstone, 18x12x10 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T2N R25E

S34 | S35
S3 | S2

T1N

1963

Deposit the original stone alongside the iron post.

Land, rolling.

Soil, sandy clay.

Timber, none.

Undergrowth, sagebrush and shadscale.

S. $89^{\circ}43'$ E., bet. secs. 2 and 35.

Over rolling desert land through scattering juniper and heavy sagebrush and shadscale.

Asc. 100 ft. over W. slope.

Dependent Resurvey of the South Boundary of T. 2 N., R. 25 E.

38.00

Base of low ridge, bears N. and S.; asc. 40 ft. over steep W. slope.

40.54

The 1/4 sec. cor. of secs. 2 and 35, monumented with a sandstone, 18x11x6 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

T2N R25E

1/4 S35

S2

T1N

1963

Deposit the original stone alongside the iron post.

N. 89°21' E., beginning new measurement.

Asc. 90 ft. over steep W. slope.

5.00

Low ridge, bears N. and S.; desc. 100 ft. over steep E. slope.

9.00

Base of ridge, bears N. and S.; thence over gentle E. slope.

39.70

Wash, 2 ft. deep, 10 lks. wide, drains S. 10° E.

42.55

Intersect the Utah-Colorado State Line.

The closing cor. of Tps. 1 and 2 N., which is identical to the 267 Mile Cor. on the Utah-Colorado State Line, and is monumented with a 2 1/2 in. iron post, set, mkd. and witnessed as described in the field notes of the 1963 retracement of the Utah-Colorado State Line.

Land, rolling and gently rolling.

Soil, sandy clay.

Timber, none.

Undergrowth, sagebrush and shadscale.

Dependent Resurvey of the Subdivision of T. 2 N., R. 25 E.

Reestablishment of the Survey Executed by A. Jessen in 1898.

From the cor. of secs. 5, 6, 31 and 32 on the S. bdy. of the Tp., previously described.

N. 0°17' W., bet. secs. 31 and 32.

Over gently rolling desert land through sagebrush, greasewood and shadscale; asc. gradually.

32.00

Begin desc. gradually over N. slope.

40.15

The 1/4 sec. cor. of secs. 31 and 32, monumented with a quartzite stone, 15x10x4 ins., set, mkd. and witnessed as described in the official record.

CHAINS

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T2N R25E

½
S31 | S32
1963

Deposit the original stone alongside the iron post and raise a mound of stone, 2 ft. base, 2 ft. high, W. of cor.

N. 0°24' W., beginning new measurement.

Desc. gradually over gentle N. slope.

8.50 N. rim of bench, bears E. and W.; desc. 80 ft. over N. slope.

16.50 Bottom of desc.; thence over gently rolling land.

18.00 Dirt road, graded, bears S. 85° E. and N. 85° W.

21.40 Power line, bears N. 85° W. and S. 85° E.

21.80 Wash, 2 ft. deep, 15 lks. wide, drains N. 60° W.

29.00 Small wash, drains W.

32.80 Small wash, drains SW.

40.47 The cor. of secs. 29, 30, 31 and 32, monumented with a quartzite stone, 14x10x8 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T2N R25E

S30 | S29
S31 | S32
1963

Deposit the original stone alongside the iron post and raise a mound of stone, 2 ft. base, 2 ft. high, W. of cor.

Land, gently rolling.

Soil, sandy clay.

Timber, none.

Undergrowth, sagebrush, greasewood and shadscale.

From the cor. of secs. 25, 30, 31 and 36, on the W. bdy. of the Tp., monumented with an iron post, 2½ ins. diam., set, mkd. and witnessed as described in the official record.

S. 89°33' E., bet. secs. 30 and 31.

Over nearly level land through scattering sagebrush.

3.50 Fence, barbed wire, bears N. 85° W. and S. 85° E.

Dependent Resurvey of the Subdivision of T. 2 N., R. 25 E.

40.09

The $\frac{1}{4}$ sec. cor. of secs. 30 and 31, monumented with a sandstone, 16x14x6 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

T2N R25E
 $\frac{1}{4}$ $\frac{S30}{S31}$
 1963

Deposit the original stone alongside the iron post.

N. 89°45' E., beginning new measurement.

Continue over nearly level land.

3.60

Fence, barbed wire, bears N. 30° E. and S. 30° W.

3.71

Right bank of Green River, course S. 30° W., banks 7 ft. high, water at present low stage.

The meander cor. of secs. 30 and 31, monumented with a sandstone, 16x14x8 ins., set and mkd. as described in the official record; there is no remaining evidence of the original bearing trees.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T2N R25E
 $\frac{S30}{S31}$ / MC
 1963

Deposit the original stone alongside the iron post and raise a mound of stone, 3 ft. base, 2 $\frac{1}{2}$ ft. high, W. of cor.

N. 89°56' E., beginning new measurement.

8.60

Point for meander cor. of secs. 30 and 31 at proportionate distance, falls in river.

9.35

Left bank of Green River.

Point for the meander cor. of secs. 30 and 31.

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T2N R25E
 MC / $\frac{S30}{S31}$
 1963

raise a mound of stone, 3 ft. base, 2 $\frac{1}{2}$ ft. high, E. of cor.

Thence over rolling bench land through sagebrush and shadscale.

36.19

The cor. of secs. 29, 30, 31 and 32.

Dependent Resurvey of the Subdivision of T. 2 N., R. 25 E.

CHAINS

Land, rolling.
Soil, sandy clay.
Timber, scattering cottonwood along river bottom.
Undergrowth, sagebrush and shadscale.

N. 0°07' W., bet. secs. 29 and 30.

Over gently rolling desert land through scattering sagebrush and greasewood.

Asc. gradually over broken SW. slope.

- 5.20 Power line, 4 wire, bears N. 35°53' W. and S. 35°53' E.
- 9.70 Wash, 2 ft. deep, 5 lks. wide, drains W., irregularly.
- 12.50 Wash, 3 ft. deep, 15 lks. wide, drains W.
- 28.00 Dozed road, bears NE. and SW.
- 32.60 Road, graded, bears NW. and SE., irregularly.
- 34.70 Wash, 3 ft. deep, 30 lks. wide, drains S. 70° W.
- 37.40 Small wash, drains SW.
- 38.10 Small wash, drains SW.
- 40.33 The $\frac{1}{2}$ sec. cor. of secs. 29 and 30, monumented with a quartzite stone, 18x10x8 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T2N R25E

$\frac{1}{2}$
S30 | S29
1963

Deposit the original stone alongside the iron post and raise a mound of stone, 3 ft. base, $2\frac{1}{2}$ ft. high, W. of cor.

N. 0°07' W., beginning new measurement.

Continue over gently rolling SW. slope through scattering sagebrush and shadscale.

- 17.60 Small draw; wash, 4 ft. deep, 15 lks. wide, drains SW.
- 20.90 Wash, 2-ft. deep, 15 lks. wide, drains SW.
- 24.30 Enter scattering juniper.
- 40.29 The cor. of secs. 19, 20, 29 and 30, monumented with a quartzite stone, 16x8x8 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

Dependent Resurvey of the Subdivision of T. 2 N., R. 25 E.

T2N R25E

S19/S20S30/S29

1963

Deposit the original stone alongside the iron post and raise a mound of stone, 3 ft. base, 2½ ft. high, W. of cor.

Land, rolling.

Soil, sandy clay.

Timber, scattering juniper.

Undergrowth, scattering sagebrush and shadscale.

From the cor. of secs. 19, 24, 25 and 30, on the W. bdy. of the Tp., monumented with an iron post, 2½ ins. diam., set, mkd. and witnessed as described in the official record.

S. 89°45' E., bet. secs. 19 and 30.

Over nearly level land through cultivated field.

12.10 Leave field; enter dense greasewood and sagebrush; thence over gently rolling land.

30.10 Power line, 4 wire, bears N. 28°40' W. and S. 28°40' E.

34.70 Fence, barbed wire, 6 strand, bears N. 28°40' W. and S. 28°40' E.

34.90 Road, graded, bears N. 28°40' W. and S. 28°40' E.

40.18 The ¼ sec. cor. of secs. 19 and 30, monumented with a sandstone, 22x12x8 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T2N R25E

¼ S19¼ S30

1963

Deposit the original stone alongside the iron post and raise a mound of stone, 3 ft. base, 2½ ft. high, N. of cor.

N. 89°55' E., beginning new measurement.

Over rolling land through heavy sagebrush; asc. 65 ft. over broken SW. slope.

5.90 Small draw, drains SW.

12.90 Spur, projects SW.; desc. 50 ft. over SE. slope.

19.40 Draw; wash, 4 ft. deep, 20 lks. wide, drains S. 60° W.; asc. 90 ft. over SW. slope of spur.

40.23 The cor. of secs. 19, 20, 29 and 30.

Land, level bottom land W. 12.00 chs.; rolling E. 68.00 chs.

Dependent Resurvey of the Subdivision of T. 2 N., R. 25 E.

CHAINS

STANDARD

Soil, sandy clay.
 Timber, none.
 Undergrowth, sagebrush, greasewood and shadscale.

N. 0°12' E., bet. secs. 19 and 20.

Over rolling bench land through scattering juniper and sagebrush; asc. gradually over SW. slope.

- 4.50 Spur, projects W.; desc. 35 ft. over NW. slope.
- 6.40 Wash, 2 ft. deep, 30 lks. wide, drains W.
- 12.60 Main wash, 2 ft. deep, 30 lks. wide, drains SW.; asc. 175 ft. over SE. slope.
- 29.40 Top of steep asc.; asc. gradually over S. slope.
- 40.15 The $\frac{1}{2}$ sec. cor. of secs. 19 and 20, monumented with a sandstone, 15x10x4 ins., set, mkd. and witnessed as described in the official record.

From which the original bearing tree:

A juniper, 9 ins. diam., bears S. 12°08' W.,
 204 lks. dist., mkd. $\frac{1}{2}$ S19 BT.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 18 ins. in the ground and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T2N R25E

$\frac{1}{2}$
 S19 | S20
 1963

Deposit the original stone alongside the iron post.

N. 0°08' E., beginning new measurement.

Over rolling desert land, across a series of small spurs and draws, through scattering juniper and sagebrush.

- 1.00 Spur, projects SW.
- 4.80 Draw, drains W.
- 9.00 Spur, projects W.
- 11.90 Draw, drains W.
- 17.00 Spur, projects W.
- 20.60 Wash, 2 ft. deep, 40 lks. wide, drains W.
- 30.00 Wash, 3 ft. deep, drains W.
- 37.90 Begin desc. into wide draw; desc. 40 ft. over N. slope.
- 40.67 Point for the cor. of secs. 17, 18, 19 and 20, as determined from the original bearing trees; there is no remaining evidence of the original stone.

From which the original bearing trees:

Dependent Resurvey of the Subdivision of T. 2 N., R. 25 E.

CHAINS

A juniper, 8 ins. diam., bears N. 66°39' E.,
 211 lks. dist., mkd. T2N R25E S17 BT.
 A juniper, 16 ins. diam., bears S. 45°45' E.,
 134 lks. dist., mkd. T2N R25E S20 BT.
 A juniper, 8 ins. diam., bears S. 63°20' W.,
 158 lks. dist., mkd. T2N R25E S19 BT.
 A juniper, 8 ins. diam., bears N. 12°12' W.,
 127 lks. dist., mkd. T2N R25E S18 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground and in a mound of stone, 6 ft. base to top, with brass cap mkd.

T2N	R25E
S18	S17
S19	S20
1963	

The cor. falls in a wash, 1 ft. deep, 50 lks. wide, draining W.

Land, rolling.
 Soil, sandy clay and rocky.
 Timber, scattering juniper.
 Undergrowth, sagebrush and shadscale.

From the cor. of secs. 13, 18, 19 and 24, on the W. bdy. of the Tp., monumented with an iron post, 2½ ins. diam., set, mkd. and witnessed as described in the official record.

N. 89°46' E., bet. secs. 18 and 19.

Over rolling and broken land; asc. 230 ft. over SW. slope.

- 1.70 Road, graded, bears NW. and SE., irregularly.
- 2.90 Small draw, drains SW.
- 10.00 Small spur, projects S.
- 13.10 Small draw, drains S.
- 18.80 Spur, projects S.
- 21.30 Draw, drains S.
- 41.17 The ¼ sec. cor. of secs. 18 and 19, monumented with a sandstone, 15x8x7 ins., set, mkd. and witnessed as described in the official record.

From which the original bearing trees:

A juniper, 9 ins. diam., bears S. 69°20' W.,
 8 lks. dist., mkd. ¼ S19 BT.
 A juniper, 7 ins. diam., bears N. 1°46' W.,
 30 lks. dist., mkd. ¼ S18 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

CHAINS

BY

T2N R25E

¼ S18

S19

1963

Deposit the original stone alongside the iron post and raise a mound of stone, 3 ft. base, 2½ ft. high, N. of cor.

S. 89°54' E., beginning new measurement.

Over a series of small spurs and draws through scattering juniper.

- 1.90 Spur, projects S.
- 5.90 Draw, drains S.
- 17.90 Spur, projects S.
- 34.10 Draw, drains S. 20° W., to junction of main draw.
- 38.10 Main draw, drains SW.
- 39.38 The cor. of secs. 17, 18, 19 and 20.

Land, rolling and broken.
Soil, sandy clay and rocky.
Timber, scattering juniper.
Undergrowth, sagebrush and shadscale.

N. 0°01' W., bet. secs. 17 and 18.

Over rolling land through scattering juniper and sagebrush.

- 1.20 Main wash in draw, 5 ft. deep, 25 lks. wide, drains W., irregularly; asc. 120 ft. over broken S. slope.
- 6.70 Wash, 4 ft. deep, 10 lks. wide, drains SW.
- 16.00 Spur, projects SW.; slope changes to E.; desc. 30 ft.
- 34.90 W. edge of large wash in bottom of draw, drains S., irregularly; asc. 105 ft. over SE. slope.
- 37.10 Small draw, drains S.
- 40.14 The ¼ sec. cor. of secs. 17 and 18, monumented with a limestone, 14x12x11 ins., set, mkd. and witnessed as described in the official record.

From which the original bearing trees:

- A juniper, 10 ins. diam., bears S. 11°55' E., 88 lks. dist., mkd. ¼ S17 BT.
- A juniper, 8 ins. diam., bears S. 88°55' W., 30 lks. dist., mkd. ¼ S18 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

Dependent Resurvey of the Subdivision of T. 2 N., R. 25 E.

CHAINS

T2N R25E

S18|S17

1963

Deposit the original stone alongside the iron post.

N. 0°07' E., beginning new measurement.

Asc. 80 ft. over SE. slope.

- 14.90 Spur, projects S. 10° W.; thence over SW. slope; asc. 230 ft.
- 29.60 Wash, 3 ft. deep, 20 lks. wide, drains SW.
- 34.50 Spur, projects W.; desc. 55 ft. over N. slope.
- 37.20 Small draw, drains W.
- 40.36 The cor. of secs. 7, 8, 17 and 18, monumented with a limestone, 12x12x5 ins., set, mkd. and witnessed as described in the official record.

From which the original bearing trees:

- A juniper, 14 ins. diam., bears N. 37°30' E., 36 lks. dist., mkd. T2N R25E S8 BT.
- A juniper, 11 ins. diam., bears S. 19°53' E., 40 lks. dist., mkd. T2N R25E S17 BT.
- A juniper, 20 ins. diam., bears S. 79°30' W., 42 lks. dist., mkd. T2N R25E S18 BT.
- A juniper, 12 ins. diam., bears N. 51° W., 26 lks. dist., mkd. T2N R25E S7 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.

T2N R25E

S7|S8

S18|S17

1963

Deposit the original stone alongside the iron post.

Land, rolling hills.

Soil, sandy clay and rocky.

Timber, juniper.

Undergrowth, sagebrush and shadscale.

From the cor. of secs. 7, 12, 13 and 18, on the W. bdy. of the Tp., monumented with an iron post, 2½ ins. diam., set, mkd. and witnessed as described in the official record.

N. 89°21' E., bet. secs. 7 and 18.

Over rolling land through scattering juniper and sagebrush; asc. gradually over W. slope.

- 3.70 E. rim of bench land, bears N. and S.; desc. 195 ft. over E. slope.
- 6.80 Road, graded, bears N. 15° E. and S. 15° W.

Dependent Resurvey of the Subdivision of T. 2 N., R. 25 E.

CHAINS

- 11.20 Wash, 3 ft. deep, 20 lks. wide, drains S.; asc. 245 ft. over broken W. slope.
 - 21.70 Low ridge, bears N. and S.; desc. 85 ft. over E. slope.
 - 25.20 Small spur, projects SE.
 - 29.00 Wash, 3 ft. deep, 20 lks. wide, drains SE.; asc. 20 ft. over SW. slope.
 - 29.50 Low spur, projects S.; desc. 45 ft. over E. slope.
 - 31.10 Main wash in bottom of small canyon, 4 ft. deep, 20 lks. wide, drains S.; asc. broken W. slope through dense cedar.
 - 35.00 Small wash, drains S. 20° W.; asc. 150 ft. over S. slope of low spur.
 - 39.94 The ¼ sec.cor. of secs. 7 and 18, monumented with a limestone, 16x7x5 ins., set, mkd. and witnessed as described in the official record.
- From which the original bearing trees:
- A juniper, 16 ins. diam., bears S. 78°08' W., 30 lks. dist., mkd. ¼ S18 BT.
 - A juniper, 10 ins. diam., bears N. 33°20' W., 23 lks. dist., mkd. ¼ S7 BT.
- At the cor. point
- Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd.
- T2N R25E

¼ $\frac{S7}{S18}$

1963
- Deposit the original stone alongside the iron post and raise a mound of stone, 3 ft. base, 2½ ft. high, N. of cor.
-
- S. 89°58' E., beginning new measurement.
- Asc. 40 ft. over S. slope.
- 1.70 Spur, projects N. 80° W.; desc. 10 ft. over NW. slope.
 - 6.60 Head of draw, drains NW.; asc. 75 ft. over W. slope.
 - 11.00 Ridge, bears N. and S.; desc. 35 ft. over SE. slope.
 - 15.10 Spur, projects S.; desc. 50 ft. over E. slope.
 - 17.40 Draw, drains S.; asc. 150 ft. over broken W. slope.
 - 24.90 Small wash, drains SW.
 - 27.90 Small wash, drains SW.
 - 28.40 Spur, projects S.; desc. 125 ft. over broken E. slope.
 - 31.10 Small wash, drains SE.
 - 33.10 Low spur, projects SE.
 - 36.30 Small wash, drains S. 20° E.

Dependent Resurvey of the Subdivision of T. 2 N., R. 25 E.

CHAINS

- 37.40 Main wash, 4 ft. deep, 20 lks. wide, drains S.; asc. 65 ft. over NW. slope.
- 40.21 The cor. of secs. 7, 8, 17 and 18.
- Land, rolling and mountainous.
Soil, sandy clay and rocky.
Timber, juniper.
Undergrowth, sagebrush and shadscale.
-
- N. 0°09' W., bet. secs. 7 and 8.
- Over mountainous land through medium juniper; desc. 15 ft. over N. slope.
- 1.70 Draw, drains S. 80° W.; asc. 260 ft. over broken SW. slope.
- 5.50 Draw, drains W.
- 16.00 Spur, projects W.; desc. gradually over W. slope.
- 19.30 Head of draw, drains W.; asc. 60 ft. over S. slope.
- 24.90 Spur, projects S. 60° E.; asc. 115 ft. over broken SE. slope.
- 28.20 Draw, drains E.
- 39.79 Point for the $\frac{1}{4}$ sec. cor. of secs. 7 and 8 at proportionate dist.; there is no remaining evidence of the original cor.
- Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.
- T2N R25E
 $\frac{1}{4}$
S7|S8
1963
- Asc. 400 ft. over broken SE. slope through medium dense juniper.
- 55.20 Spur, projects SE.
- 74.10 Rocky spur, projects SW.; asc. 160 ft. over broken S. slope.
- 79.58 The cor. of secs. 5, 6, 7 and 8, monumented with a sandstone, 18x12x4 ins., set, mkd. and witnessed as described in the official record.
- From which the original bearing trees:
- A juniper, 11 ins. diam., bears N. 58°39' E.,
34 lks. dist., mkd. T2N R25E S5 BT.
A juniper, 12 ins. diam., bears S. 56°50' E.,
43 lks. dist., mkd. T2N R25E S8 BT.
A juniper, 10 ins. diam., bears S. 48°47' W.,
30 lks. dist., mkd. T2N R25E S7 BT.
A juniper, 8 ins. diam., bears N. 51°50' W.,
37 lks. dist., mkd. T2N R25E S6 BT.
- At the cor. point
- Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 4 ins. in the ground to bedrock, and in a mound of stone, 4 ft.

Dependent Resurvey of the Subdivision of T. 2 N., R. 25 E.

CHAINS

base to top, with brass cap mkd.

T2N R25E
 S6 | S5
 S7 | S8
 1963

Deposit the original stone alongside the iron post.

Land, mountainous.
 Soil, rocky.
 Timber, juniper.
 Undergrowth, sagebrush.

From the cor. of secs. 1, 6, 7 and 12, on the W. bdy. of the Tp., monumented with an iron post, 2½ ins. diam., set, mkd. and witnessed as described in the official record.

S. 89°03' E., bet. secs. 6 and 7.

Over mountainous land through scattering juniper and pinon; desc. 240 ft. over E. slope.

6.80 Bottom of Jesse Ewing Canyon; wash, 8 ft. deep, 30 lks. wide, drains S. 20° E., irregularly; asc. 80 ft. over W. slope.

7.90 Road, graded, follows along bottom of canyon.

12.80 Spur, projects S.; desc. 40 ft. over SE. slope.

18.90 Draw, drains SW.; asc. 520 ft. over NW. slope, changing to N. slope.

39.71 The ¼ sec. cor. of secs. 6 and 7 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T2N R25E
 ¼ S6
 S7
 1963

Asc. 120 ft. over N. slope.

46.00 Point of spur, projects S. 80° W.; asc. 80 ft. over top of spur.

55.00 Top of rocky pinnacle; thence along S. slope over series of small ledges.

75.00 Slope changes to SE.; desc. 200 ft.

79.42 The cor. of secs. 5, 6, 7 and 8.

Land, mountainous.
 Soil, rocky.
 Timber, juniper and pinon.
 Undergrowth, shadscale, sagebrush and manzanita.

N. 0°39' W., bet. secs. 5 and 6.

Over mountainous land through dense juniper and pinon; asc. 25 ft. over SE. slope.

Dependent Resurvey of the Subdivision of T. 2 N., R. 25 E.

CHAINS

- 6.90 Spur, projects E.; thence by triangulation; asc. gradually over E. slope.
- 13.00 Slope changes to SE.; asc. 280 ft.
- 23.00 Point of spur, projects E.
- 25.00 Canyon, drains E. approximately 2.00 chs., thence S., irregularly; asc. 320 ft. over S. slope.
- 35.30 End of triangulation.
- 39.91 The $\frac{1}{4}$ sec. cor. of secs. 5 and 6, monumented with a sandstone, 18x11x6 ins., set, mkd. and witnessed as described in the official record.
- From which the original bearing trees:
- A juniper, 8 ins. diam., bears S. 16°30' E.,
10 lks. dist., mkd. $\frac{1}{4}$ S5 BT.
- A juniper, 16 ins. diam., bears N. 51° W.,
4 lks. dist., mkd. $\frac{1}{4}$ S6 BT.
- At the cor. point
- Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.
- T2N R25E
 $\frac{1}{4}$
S6 | S5
1963
- Deposit the original stone alongside the iron post.
-
- N. 0°08' E., beginning new measurement.
- Asc. 100 ft. over S. slope, changing to SE. slope.
- 13.40 Top of asc.; desc. 80 ft. over NE. slope.
- 33.90 Draw, drains SE.; asc. 80 ft. over S. slope.
- 40.86 The cor. of secs. 5, 6, 31 and 32, on the N. bdy. of the Tp., monumented with an iron post, 2 $\frac{1}{2}$ ins. diam., set, mkd. and witnessed as described in the official record.
- Land, mountainous.
Soil, rocky.
Timber, juniper, mahogany and pinon.
Undergrowth, sagebrush and shadscale.
-
- From the cor. of secs. 4, 5, 32 and 33, on the S. bdy. of the Tp., previously described.
- N. 0°07' W., bet. secs. 32 and 33.
- Over gently rolling bench land through heavy sagebrush and greasewood; asc. gradually.
- 26.30 Trail road, bears NW. and SE.
- 37.60 Power line, 4 wire, bears N. 88°30' W. and S. 88°30' E.
- 40.28 The $\frac{1}{4}$ sec. cor. of secs. 32 and 33, monumented with a sandstone, 12x10x6 ins., set, mkd. and witnessed as

Dependent Resurvey of the Subdivision of T. 2 N., R. 25 E.

CHAINS

described in the official record.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T2N R25E

$\frac{1}{2}$.

S32|S33

1963

Deposit the original stone alongside the iron post and raise a mound of stone, 3 ft. base, $2\frac{1}{2}$ ft. high, W. of cor.

N. $0^{\circ}07'$ W., beginning new measurement.

Continue over gently rolling bench land.

- 1.30 Wash, 2 ft. deep, 20 lks. wide, drains S. 20° E.
- 8.10 Road, graded, bears NE. and SW.
- 14.00 Trail road, bears NE. and SW.
- 18.90 Corner of fence, bears E., 37 lks. dist.; fence bears E. and N. 1° W.; thence along W. side of fence.
- 40.30 The cor. of secs. 28, 29, 32 and 33, monumented with a sandstone, 21x7x6 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T2N R25E

S29|S28

S32|S33

1963

Deposit the original stone alongside the iron post and raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

The cor. is 1 lk. S. of the cor. of a 4 strand, barbed wire fence that bears S. 1° E. and E.

Land, gently rolling.

Soil, sandy clay.

Timber, none.

Undergrowth, sagebrush, shadscale and greasewood.

From the cor. of secs. 29, 30, 31 and 32, previously described.

N. $89^{\circ}56'$ E., bet. secs. 29 and 32.

Over gently rolling land through scattering juniper and sagebrush; asc. 120 ft. over W. slope.

- 3.70 Power line, bears N. 36° W. and S. 36° E.
- 20.20 Road, graded, bears N. 25° W. and S. 25° E.
- 39.00 Trail road, bears NW. and SE.

Dependent Resurvey of the Subdivision of T. 2 N., R. 25 E.

CHAINS

40.61

The $\frac{1}{4}$ sec. cor. of secs. 29 and 32, monumented with a sandstone, 17x8x6 ins., set, mkd. and witnessed as described in the official record.

From which the original bearing trees:

A juniper, 14 ins. diam., bears N. 73°41' E.,
98 lks. dist., mkd. $\frac{1}{4}$ S29 BT.

A juniper, 20 ins. diam., bears S. 34°22' W.,
149 lks. dist., mkd. $\frac{1}{4}$ S32 BT.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 18 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T2N R25E

$\frac{1}{4}$ S29
S32

1963

Deposit the original stone alongside the iron post.

N. 89°56' E., beginning new measurement.

Asc. 135 ft. over W. slope.

16.70 Wash, 6 ft. deep, 20 lks. wide, drains NW.

16.80 Top of asc., bears N. and S.; desc. gradually over nearly level land.

19.80 Trail road, bears N. and S.

40.11 The cor. of secs. 28, 29, 32 and 33.

Land, gently rolling.

Soil, sandy clay.

Timber, scattering juniper.

Undergrowth, sagebrush and shadscale.

N. 0°04' W., bet. secs. 28 and 29.

Over rolling bench land through scattering juniper and dense sagebrush and greasewood; asc. gradually.

31.70 Wash, 1 ft. deep, 15 lks. wide, drains SE.

40.38 The $\frac{1}{4}$ sec. cor. of secs. 28 and 29, monumented with a sandstone, 18x7x5 ins., set, mkd. and witnessed as described in the official record.

From which the original bearing tree:

A juniper, 8 ins. diam., bears S. 9°45' E.,
199 lks. dist., mkd. $\frac{1}{4}$ S28 BT.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T2N R25E

$\frac{1}{4}$
S29 | S28

1963

Dependent Resurvey of the Subdivision of T. 2 N., R. 25 E.

CHAINS

Deposit the original stone alongside the iron post and raise a mound of stone, 3 ft. base, 2½ ft. high, W. of cor.

N. 0°14' W., beginning new measurement.

Asc. 110 ft. over gentle SE. slope.

19.70 Wash, 3 ft. deep, 20 lks. wide, drains SE.

40.20 The cor. of secs. 20, 21, 28 and 29, monumented with a sandstone, 18x8x4 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T2N R25E
S20 | S21
S29 | S28
1963

Deposit the original stone alongside the iron post and raise a mound of stone, 3 ft. base, 2½ ft. high, W. of cor.

Land, gently rolling.
Soil, sandy clay.
Timber, scattering juniper.
Undergrowth, sagebrush, greasewood and shadscale.

From the cor. of secs. 19, 20, 29 and 30, previously described.

N. 89°57' E., bet. secs. 20 and 29.

Over gently rolling bench land through heavy sagebrush and shadscale; asc. 140 ft. over broken W. slope.

15.50 Enter scattering juniper and pinon.

37.20 Wash, 3 ft. deep, 20 lks. wide, drains S. 60° W.

40.56 The ¼ sec. cor. of secs. 20 and 29, monumented with a sandstone, 12x12x6 ins., set, mkd. and witnessed as described in the official record.

From which the original bearing trees:

A juniper, 15 ins. diam., bears S. 15°45' E.,
21 lks. dist., mkd. ¼ S29 BT.
A pinon, 18 ins. diam., bears N. 14° W., 100
lks. dist., mkd. ¼ S20 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T2N R25E
¼ S20
S29
1963

Deposit the original stone alongside the iron post.

Dependent Resurvey of the Subdivision of T. 2 N., R. 25 E.

CHAINS

N. 89°53' E., beginning new measurement.

Asc. 240 ft. over steep W. slope.

14.90 Top of asc., bears N. and S.; thence over rolling level bench land; desc. 65 ft. over gentle S. slope.

25.00 Wash, 2 ft. deep, 10 lks. wide, drains SW.

40.24 The cor. of secs. 20, 21, 28 and 29.

Land, rolling and gently rolling.
Soil, sandy clay.
Timber, juniper and pinon.
Undergrowth, sagebrush and greasewood.

N. 0°08' W., bet. secs. 20 and 21.

Over rolling and broken land through scattering juniper and pinon; asc. 90 ft. over S. slope.

40.26 The 1/4 sec. cor. of secs. 20 and 21, monumented with a sandstone, 18x9x5 ins., set, mkd. and witnessed as described in the official record.

From which the original bearing tree:

A juniper, 9 ins. diam., bears N. 88°18' W.,
95 lks. dist., mkd. 1/4 S20 BT.

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.

T2N R25E
1/4
S20|S21
1963

Deposit the original stone alongside the iron post and raise a mound of stone, 3 ft. base, 2 1/2 ft. high, W. of cor.

N. 0°07' W., beginning new measurement.

By triangulation; desc. 50 ft. over NW. slope.

6.50 Draw, drains SW.; asc. 180 ft. over SE. slope.

37.50 Spur, projects SW.; asc. gradually over W. slope.

40.44 The cor. of secs. 16, 17, 20 and 21, monumented with a sandstone, 17x9x5 ins., set, mkd. and witnessed as described in the official record.

From which the original bearing trees:

A juniper, 8 ins. diam., bears N. 48°45' E.,
65 lks. dist., mkd. T2N R25E S16 BT.
A juniper, 9 ins. diam., bears S. 36°05' W.,
82 lks. dist., mkd. T2N R25E S20 BT.
A juniper, 12 ins. diam., bears N. 39°40' W.,
100 lks. dist., mkd. T2N R25E S17 BT.

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 20 ins.

Dependent Resurvey of the Subdivision of T. 2 N., R. 25 E.

CHAINS

in the ground, and in a collar of stone, with brass cap mkd.

T2N R25E
 $\frac{1}{2}$ S17 S16
 $\frac{1}{2}$ S20 S21
 1963

Deposit the original stone alongside the iron post and raise a mound of stone, 3 ft. base, 2½ ft. high, W. of cor.

Land, rolling.
 Soil, sandy clay and rocky.
 Timber, juniper and pinon.
 Undergrowth, sagebrush and shadscale.

From the cor. of secs. 17, 18, 19 and 20, previously described.

S. 89°53' E., bet. secs. 17 and 20.

Over rolling land through scattering juniper and pinon; asc. 120 ft. over W. slope.

15.30 Spur, projects S. 75° W.; thence along S. side of spur over series of washes and spurs.

22.90 Spur, projects S.; desc. gradually over broken SE. slope.

38.50 Draw, drains S.

40.17 The ½ sec. cor. of secs. 17 and 20, monumented with a limestone, 16x12x6 ins., set, mkd. and witnessed as described in the official record.

From which the original bearing trees:

A juniper, 10 ins. diam., bears S. 34° W., 10 lks. dist., mkd. ½ S20 BT.

A juniper, 18 ins. diam., bears N. 22°15' W., 47 lks. dist., mkd. ½ S17 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 16 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T2N R25E
 $\frac{1}{2}$ S17
 $\frac{1}{2}$ S20
 1963

Deposit the original stone alongside the iron post.

East, beginning new measurement.

Continue over series of small spurs and draws.

.80 Spur, projects S.; desc. 40 ft. over E. slope.

5.30 Main draw, drains S. 10° W.; asc. 240 ft. over series of small spurs and draws.

15.20 Spur, projects S.

18.50 Draw, drains S. 15° W.

Dependent Resurvey of the Subdivision of T. 2 N., R. 25 E.

CHAINS

- 25.30 Spur, projects S.
- 40.23 The cor. of secs. 16, 17, 20 and 21.
Land, mountainous.
Soil, sandy clay and rocky.
Timber, juniper and pinon.
Undergrowth, sagebrush and shadscale.
- N. 0°07' W., bet. secs. 16 and 17.
Over mountainous land through dense juniper and pinon;
By triangulation; asc. 120 ft. over SW. slope.
- 23.96 End of triangulation; low ridge, bears NW, and SE.;
asc. 50 ft. over NE. slope.
- 39.92 The $\frac{1}{4}$ sec. cor. of secs. 16 and 17, monumented with a
sandstone, 18x12x8 ins., set, mkd. and witnessed as
described in the official record.
From which the original bearing trees:
A juniper, 9 ins. diam., bears S. 7°30' E.,
13 lks. dist., mkd. $\frac{1}{4}$ S16 BT.
A juniper, 14 ins. diam., bears S. 85°30' W.,
8 lks. dist., mkd. $\frac{1}{4}$ S17 BT.
At the cor. point
Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 16 ins.
in the ground to bedrock and in a mound of stone, 3 ft.
base to top, with brass cap mkd.
T2N R25E
 $\frac{1}{4}$
S17 | S16
1963
Deposit the original stone alongside the iron post.
N. 0°06' W., beginning new measurement.
By triangulation; desc. 60 ft. over NE. slope.
- 2.00 Dirt road, unimproved, bears NW. and SE.
- 10.50 Willow Creek, 5 ins. deep, 5 lks. wide, course SE.;
asc. 200 ft. over SW. slope.
- 36.37 End of triangulation; spur, projects W.; desc. 30 ft.
over NW. slope.
- 40.51 The cor. of secs. 8, 9, 16 and 17, monumented with a
sandstone, 16x6x5 ins., set, mkd. and witnessed as
described in the official record.
From which the original bearing trees:
A juniper, 8 ins. diam., bears N. 83°35' E.,
21 lks. dist., mkd. T2N R25E S9 BT.
A juniper, 8 ins. diam., bears S. 6°12' E.,
19 lks. dist., mkd. T2N R25E S16 BT.
A juniper, 10 ins. diam., bears S. 10°40' W.,
13 lks. dist., mkd. T2N R25E S17 BT.
A juniper, 12 ins. diam., bears N. 6°10' W.,
20 lks. dist., mkd. T2N R25E S8 BT.

Dependent Resurvey of the Subdivision of T. 2 N., R. 25 E.

CHAINS

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mhd.

T2N R25E
 89|89
 S17|S16
 1963

Deposit the original stone alongside the iron post.

Land, mountainous.
 Soil, sandy clay and rocky.
 Timber, juniper.
 Undergrowth, sagebrush and shadescale.

From the cor. of secs. 7, 8, 17 and 18.

S. 89°58' E., bet. secs. 8 and 17.

Over mountainous land through dense juniper; asc. 85 ft. over broken NW. slope.

- 6.00 Spur, projects N.; desc. 55 ft. over SE. slope.
- 9.60 Small wash, drains SE.
- 10.90 Spur, projects SE.
- 13.50 Main draw; wash, 4 ft. deep, 15 lks. wide, drains SW., irregularly; asc. 135 ft. over broken NW. slope.
- 23.90 Spur, projects S.; desc. 55 ft. over E. slope.
- 27.40 Draw, drains S.
- 27.90 Spur, projects SE.
- 30.30 Draw, drains S.; asc. 110 ft. over broken W. slope.
- 32.20 Spur, projects SW.
- 37.00 Main spur, projects S.; desc. 55 ft. over broken E. slope.
- 38.80 Spur, projects SE.
- 40.49 The ¼ sec. cor. of secs. 8 and 17, monumented with a sandstone, 15x10x4 ins., set, mhd. and witnessed as described in the official record.

From which the original bearing trees:

- A juniper, 12 ins. diam., bears N. 27°30' E., 17 lks. dist., mhd. ¼ S8 NE.
- A juniper, 16 ins. diam., bears S. 2°45' E., 24 lks. dist., mhd. ¼ S17 SE.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground to bedrock, and in a mound of stone, 1 ft. base to top, with brass cap mhd.

Dependent Resurvey of the Subdivision of T. 2 N., R. 25 E.

CHAINS

T2N R25E

 $\frac{1}{2}$ S8
 S17
 1963

Deposit the original stone alongside the iron post.

S. 89°56' E., beginning new measurement.

By triangulation; desc. 140 ft. over E. slope through dense juniper.

- 7.00 Bottom of canyon, drains S.; asc. 240 ft. over broken SW. slope.
- 32.70 End of triangulation; ridge, bears N. and S.; desc. 120 ft. over SE. slope.
- 37.40 Willow Creek, 5 ins. deep, 5 lks. wide, course SW.; asc. 40 ft. over NW. slope.
- 39.94 The cor. of secs. 8, 9, 16 and 17.

Land, mountainous.
 Soil, sandy clay and rocky.
 Timber, juniper and pinon.
 Undergrowth, sagebrush and shadscale.

N. 0°11' W., bet. secs. 8 and 9.

Over mountainous land through dense juniper and pinon; desc. 40 ft. over NW. slope.

- 2.10 Willow Creek, 5 ins. deep, 5 lks. wide, course SW.; asc. 320 ft. over SE. slope.
- 14.10 Spur, projects SE.; thence by triangulation; desc. 160 ft. over broken E. slope of Willow Creek Canyon.
- 39.97 The $\frac{1}{2}$ sec. cor. of secs. 8 and 9, monumented with a quartzite stone, 16x10x5 ins., set, mkd. and witnessed as described in the official record.

From which the original bearing tree:

A juniper, 11 ins. diam., bears S. 46°49' W.,
 42 lks. dist., mkd. $\frac{1}{2}$ S8 BT.
 There is no remaining evidence of the original
 cottonwood bearing tree.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 10 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T2N R25E
 $\frac{1}{2}$
 S8 | S9
 1963

Deposit the original stone alongside the iron post.

N. 0°28' W., beginning new measurement.

Continue by triangulation; asc. 80 ft. along bottom of Willow Creek Canyon.

Dependent Resurvey of the Subdivision of T. 2 N., R. 25 E.

<p>CHAINS 4.00</p>	<p>Willow Creek, course SE.; thence along E. edge of the creek.</p>				
<p>27.00</p>	<p>Willow Creek, course S., irregularly; asc. 120 ft. over broken E. slope.</p>				
<p>40.24</p>	<p>The cor. of secs. 4, 5, 8 and 9, monumented with a sandstone, 18x6x5 ins., set and mkd. as described in the official record; there is no remaining evidence of the original bearing trees due to a recent fire in the area.</p> <p>At the cor. point</p> <p>Set an iron post, 30 ins long, 2½ ins. diam , 18 ins. in the ground to bedrock and in a mound of stone, 4 ft. base to top, with brass cap mkd.</p> <div style="text-align: center;"> <p>T2N R25E</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td>S5</td> <td>S4</td> </tr> <tr> <td>S8</td> <td>S9</td> </tr> </table> <p>1963</p> </div> <p>Deposit the original stone alongside the iron post.</p> <p>Land, mountainous. Soil, rocky. Timber, juniper, pinon; cottonwood along the bottom of Willow Creek. Undergrowth, sagebrush and willows along bottom of Willow Creek.</p>	S5	S4	S8	S9
S5	S4				
S8	S9				
	<p>From the cor. of secs. 5, 6, 7 and 8, previously described.</p> <p>N. 89°00' E., bet secs. 5 and 8.</p> <p>Over mountainous land through dense juniper and pinon; by triangulation; desc. 240 ft. over NE. slope.</p>				
<p>10.00</p>	<p>Canyon, drains SE.; thence over point of spur.</p>				
<p>12.00</p>	<p>Point of spur, projects S. about 5.00 chs. to junction of canyons.</p>				
<p>14.00</p>	<p>Canyon, drains S., irregularly; asc. 320 ft. over broken SW. slope.</p>				
<p>40.03</p>	<p>The ¼ sec. cor. of secs. 5 and 8, monumented with a sandstone, 20x8x5 ins., set, mkd. and witnessed as described in the official record.</p> <p>At the cor. point</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 4 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.</p> <div style="text-align: center;"> <p>T2N R25E</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td>¼</td> <td>S5</td> </tr> <tr> <td></td> <td>S8</td> </tr> </table> <p>1963</p> </div> <p>Deposit the original stone alongside the iron post.</p> <p style="text-align: center;">—————</p> <p>N. 89°58' E., beginning new measurement.</p> <p>Continue by triangulation; asc. 180 ft. over SW. slope.</p>	¼	S5		S8
¼	S5				
	S8				

Dependent Resurvey of the Subdivision of T. 2 N., R. 25 E.

CHAINS
15.70

End of triangulation.

24.90

Ridge, bears N. and S.; desc. 500 ft. over E. slope.

39.91

The cor. of secs. 4, 5, 8 and 9.

Land, mountainous.
Soil, rocky.
Timber, juniper and pinon.
Undergrowth, sagebrush.

North, bet. secs. 4 and 5.

Over mountainous land through dense juniper and pinon;
by triangulation; asc. 200 ft. over E. slope along W.
side of Willow Creek Canyon.

40.49

The 1/2 sec. cor. of secs. 4 and 5, monumented with a
sandstone, 12x6x4 ins., set, mkd. and witnessed as
described in the official record.

From which the original bearing trees:

- A juniper, 12 ins. diam., bears S. 60° W.,
12 lks. dist., mkd. 1/2 S5 BT.
- A juniper, 16 ins. diam., bears S. 71° E.,
16 lks. dist., mkd. 1/2 S4 BT.

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 5 ins.
in the ground to bedrock, and in a mound of stone, 6
ft. base to top, with brass cap mkd.

T2N R25E
1/2
S5|S4
1963

Deposit the original stone alongside the iron post.

N. 0°02' E., beginning new measurement.

Continue by triangulation; asc. 600 ft. over E. slope,
changing to SE. slope.

40.23

The cor. of secs. 4, 5, 32 and 33, on the N. bdy. of
the Tp., monumented with an iron post, 2 1/2 ins. diam.,
set, mkd. and witnessed as described in the official
record.

Land, mountainous.
Soil, rocky.
Timber, juniper and pinon.
Undergrowth, sagebrush.

From the cor. of secs. 3, 4, 33 and 34 on the S. bdy.
of the Tp., previously described.

N. 0°02' W., bet. secs. 33 and 34.

Over gently rolling bench land through scattering
juniper and dense sagebrush.

35.90

Power line, 4 wire, bears N. 88°30' W. and S. 88°30' E.

Dependent Resurvey of the Subdivision of T. 2 N., R. 25 E.

CHAINS
40.30

The 1/4 sec. cor. of secs. 33 and 34, monumented with a sandstone, 16x6x4 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

T2N R25E
1/4
S33|S34
1963

Deposit the original stone alongside the iron post.

N. 0°01' W., beginning new measurement.

- 2.00 Dirt road, unimproved, bears NW. and SE.
- 4.10 Small draw, drains SE.
- 8.25 Road, graded, bears NW. and SE.
- 10.75 Willow Creek Ranch road, graded, bears NW. and SE. approximately 3.00 chs. to junction of main road.
- 14.10 Fence, net wire, bears N. 12° W. and S. 12° E.; 2 wire telephone line follows along fence line.
- 40.20 The cor. of secs. 27, 28, 33 and 34, monumented with a sandstone, 12x6x4 ins., set, mkd. and witnessed as described in the official record.

From which the original bearing tree:

A juniper, 12 ins. diam., bears S. 81°10' E., 30 lks. dist., mkd. T2N R25E S34 BT.

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 12 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T2N R25E
S28|S27
S33|S34
1963

Deposit the original stone alongside the iron post and raise a mound of stone, 3 ft. base, 2 1/2 ft. high, W. of cor.

Land, gently rolling.
Soil, sandy clay.
Timber, scattering juniper.
Undergrowth, sagebrush and shadscale.

From the cor. of secs. 28, 29, 32 and 33, previously described.

N. 89°53' E., bet. secs. 28 and 33.

Over gently rolling land along 4 strand, barbed wire fence, through scattering juniper and heavy sagebrush.

Dependent Resurvey of the Subdivision of T. 2 N., R. 25 E.

CHAINS

- 19.90 Fence cor., bears S. and W.; leave fence line; continue over gently rolling land.
- 21.00 Wash, 4 ft. deep, 10 lks. wide, drains SE.
- 27.10 Wash, 1 ft. deep, 10 lks. wide, drains S.
- 28.50 Wash, 3 ft. deep, 10 lks. wide, drains S.
- 40.31 The $\frac{1}{4}$ sec. cor. of secs. 28 and 33, monumented with a sandstone, 14x8x6 ins., set, mkd. and witnessed as described in the official record.
- At the cor. point
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.
- T2N R25E
 $\frac{1}{4}$ $\frac{S28}{S33}$
1963
- Deposit the original stone alongside the iron post and raise a mound of stone, 2 ft. base, 2 ft. high, N. of cor.
-
- N. $89^{\circ}57'$ E., beginning new measurement.
- Continue over gently rolling land.
- 20.80 Irrigation ditch, 6 ins. deep, 5 lks. wide, course S.
- 24.70 S. end of airstrip, 1.30 chs. wide, bears N. approximately $\frac{1}{2}$ mi.
- 31.10 Road to Willow Creek Ranch, bears N. 10° E. and S. 10° W.
- 35.50 Fence, net wire, bears N. and S.
- 40.08 The cor. of secs. 27, 28, 33 and 34.
- Land, gently rolling.
Soil, sandy clay.
Timber, scattering juniper.
Undergrowth, sagebrush and shadscale.
-
- N. $0^{\circ}04'$ W., bet. secs. 27 and 28.
- Over gently rolling farm land through Willow Creek Ranch; by traverse, around farm buildings.
- 16.86 From this point, the SE. cor. of the Willow Creek Ranch house bears W., 1.30 chs. dist.
- 24.98 End of traverse; thence over gently rolling pasture land.
- 32.00 Willow Creek, 6 ins. deep, 25 lks. wide, course SE.; thence along E. side of creek.
- 40.27 Point for the $\frac{1}{4}$ sec. cor. of secs. 27 and 28 at proportionate dist.; there is no remaining evidence of the original cor.
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.

Dependent Resurvey of the Subdivision of T. 2-N., R. 25 E.

CHAINS

T2N R25E
1/4
S28 | S27
1963

Continue over gently rolling pasture land along E. side of Willow Creek.

41.60 Fence, netwire, bears E. and W.

49.70 Leave Willow Creek; continue over pasture land.

74.70 Trail road, bears NW. and SE.

80.54 True point for the cor. of secs. 21, 22, 27 and 28 at proportionate dist. falls in pasture; there is no remaining evidence of the original cor.

Point selected for the witness cor. of secs. 21, 22, 27 and 28 bears N. 89°39' E., 1.90 chs. dist., and is monumented with an iron post, 2 1/2 ins. diam., hereinafter described.

Land, gently rolling farm land.
Soil, sandy clay.
Timber, none.
Undergrowth, sagebrush, willows and pasture grass.

From the cor. of secs. 20, 21, 28 and 29, previously described.

N. 89°41' E., bet. secs. 21 and 28.

Over gently rolling land through scattering juniper and sagebrush.

40.35 The 1/4 sec. cor. of secs. 21 and 28, monumented with a sandstone, 16x8x5 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.

T2N R25E
1/4
S21
S28
1963

Deposit the original stone alongside the iron post and raise a mound of stone, 3 ft. base, 2 1/2 ft. high, N. of cor.

S. 89°43' E., beginning new measurement.

Continue over gently rolling land.

4.30 Dirt road, unimproved, bears N. and S.

21.90 Fence, net wire, bears N. and S.; desc. 80 ft. over E. slope.

26.30 Wash, 5 ft. deep, 30 lks. wide, drains E., irregularly.

28.90 Irrigation ditch, 1 ft. deep, 10 lks. wide, course S.; enter pasture land.

Dependent Resurvey of the Subdivision of T. 2 N., R. 25 E.

CHAINS

29.40 Willow Creek, 6 ins. deep, 8 lks. wide, course S.; asc. gradually over gentle W. slope.

33.40 Irrigation ditch, 1 ft. deep, 10 lks. wide, course S.

33.60 Trail road, bears N. and S.

40.05 True point for the cor. of secs. 21, 22, 27 and 28.

Land, gently rolling.

Soil, sandy clay.

Timber, scattering juniper.

Undergrowth, sagebrush, shadscale and pasture grass.

N. 0°04' W., bet. secs. 21 and 22.

Over gently rolling pasture land.

4.50 Fence, net wire, bears NW. and SE.; leave pasture land; asc. 185 ft. over SW. slope through scattering juniper and sagebrush.

40.27 The $\frac{1}{2}$ sec. cor. of secs. 21 and 22, monumented with a sandstone, 18x9x3 ins., set, mkd. and witnessed as described in the official record.

From which the original bearing trees:

A juniper, 12 ins. diam., bears N. 85°45' E.,
75 lks. dist., mkd. $\frac{1}{2}$ S22 BT.

A juniper, 8 ins. diam., bears S. 64°10' W.,
12 lks. dist., mkd. $\frac{1}{2}$ S21 BT.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

T2N R25E

$\frac{1}{2}$
S21 | S22
1963

N. 0°02' W., beginning new measurement.

Asc. 80 ft. over rolling bench land through scattering juniper.

8.00 Spur, projects W.; desc. 80 ft. over N. slope.

16.20 Draw, drains W.; asc. 175 ft. over S. slope.

40.03 The cor. of secs. 15, 16, 21 and 22, monumented with a sandstone, 12x7x5 ins., set, mkd. and witnessed as described in the official record.

From which the original bearing trees:

A juniper, 8 ins. diam., bears N. 77° E., 5
lks. dist., mkd. T2N R25E S15 BT.

A juniper, 9 ins. diam., bears S. 42°10' E.,
15 lks. dist., mkd. T2N R25E S22 BT.

A juniper, 8 ins. diam., bears S. 11°45' W.,
18 lks. dist., mkd. T2N R25E S21 BT.

A juniper, 10 ins. diam., bears N. 23°10' W.,
40 lks. dist., mkd. T2N R25E S16 BT.

At the cor. point

Dependent Resurvey of the Subdivision of T. 2 N., R. 25 E.

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T2N R25E
 $\frac{S16}{S21}$ | $\frac{S15}{S22}$
 1963

Deposit the original stone alongside the iron post.

Land, rolling bench land.
 Soil, sandy clay and rocky.
 Timber, juniper.
 Undergrowth, sagebrush.

From the cor. of secs. 16, 17, 20 and 21, previously described.

N. $89^{\circ}56'$ E., bet. secs. 16 and 21,

Over rolling bench land through scattering juniper and sagebrush.

- 4.00 Wash, 7 ft. deep, 20 lks. wide, drains S.
- 12.80 Dirt road, unimproved, bears NW. and SE.
- 15.10 W. rim of Willow Creek Canyon, bears NW. and SE.; desc. 100 ft. over NE. slope.
- 19.00 Trail road, bears NW. and SE.
- 21.80 Willow Creek, 6 ins. deep, 10 lks. wide, course SE.; asc. 55 ft. over SW. slope.
- 26.40 E. rim of Willow Creek Canyon, bears NW. and SE.; thence over rolling bench land.
- 28.10 Draw, drains S.
- 37.00 Wash, 3 ft. deep, 8 lks. wide, drains S.
- 40.29 The $\frac{1}{4}$ sec. cor. of secs. 16 and 21, monumented with a sandstone, 12x10x8 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T2N R25E
 $\frac{S16}{S21}$
 1963

Deposit the original stone alongside the iron post.

S. $89^{\circ}18'$ E., beginning new measurement.

Over rolling bench land.

- 2.00 Enter dense juniper.
- 2.50 Wash, 3 ft. deep, 10 lks. wide, drains SE.

Dependent Resurvey of the Subdivision of T. 2 N., R. 25 E.

CHAINS

- 7.70 Wash, 3 ft. deep, 10 lks. wide, drains SE.
 9.40 Trail road, bears NE. and SW., irregularly.
 11.70 Draw, drains SE.
 16.20 Draw, drains SE.
 23.70 Wash, 3 ft. deep, 10 lks. wide, drains SE.
 27.30 Fence, barbed wire, bears N. and S.
 35.10 Trail road, bears NW. and SE., irregularly.
 40.31 The cor. of secs. 15, 16, 21 and 22.

Land, rolling.
 Soil, sandy clay and rocky.
 Timber, juniper.
 Undergrowth, sagebrush.

N. 0°02' W., bet. secs. 15 and 16.

Over mountainous land through dense juniper and pinon;
 asc. 240 ft. over S. slope.

- 2.00 Wash, 4 ft. deep, 20 lks. wide, drains SE.; thence by
 triangulation.
 3.50 Trail road, bears NW. and SE.
 40.08 The $\frac{1}{4}$ sec. cor. of secs. 15 and 16, monumented with a
 quartzite stone, 15x10x6 ins., set, mkd. and witnessed
 as described in the official record.

From which the original bearing trees:

A pinon, 16 ins. diam., bears N. 82°15' W.,
 28 lks. dist., mkd. $\frac{1}{4}$ S16 BT.
 A pinon, 10 ins. diam., bears S. 8°15' E.,
 37 lks. dist., mkd. $\frac{1}{4}$ S15 BT.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., on solid
 rock and in a mound of stone, 4 ft. base to top, with
 brass cap mkd.

T2N R25E

$\frac{1}{4}$

S16 | S15

1963

Deposit the original stone alongside the iron post.

N. 0°21' E., beginning new measurement.

Continue by triangulation; asc. 600 ft. over broken S.
 slope.

- 5.50 Draw, drains SW.
 38.97 The cor. of secs. 9, 10, 15 and 16, monumented with a
 quartzite stone, 14x8x3 ins., set, mkd. and witnessed
 as described in the official record.

From which the original bearing trees:

Dependent Resurvey of the Subdivision of T. 2 N., R. 25 E.

CHAINS

A juniper, 14 ins. diam., bears N. $46^{\circ}45'$ E.,
10 lks. dist., mkd. T2N R25E S10 BT.
A juniper, 10 ins. diam., bears S. $31^{\circ}30'$ E.,
20 lks. dist., mkd. T2N R25E S15 BT.
A juniper, 8 ins. diam., bears S. $36^{\circ}10'$ W.,
28 lks. dist., mkd. T2N R25E S16 BT.
A juniper, 12 ins. diam., bears N. $54^{\circ}15'$ W.,
16 lks. dist., mkd. T2N R25E S9 BT.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins. in
the ground to bedrock, and in a mound of stone, 4 ft.
base to top, with brass cap mkd.

T2N	R25E
S9	S10
S16	S15
1963	

Deposit the original stone alongside the iron post.

Land, mountainous.
Soil, rocky.
Timber, juniper and pinon.
Undergrowth, sagebrush.

From the cor. of secs. 8, 9, 16 and 17, previously
described.

S. $88^{\circ}39'$ E., bet. secs. 9 and 16.

Over mountainous land through dense juniper and pinon;
asc. 200 ft. over NW. slope.

6.00 Spur, projects S. 80° W.; thence by triangulation.

Asc. 200 ft. over broken S. slope.

34.70 End of triangulation; spur, projects S.; desc. 160 ft. over
E. slope.

37.00 Ravine, drains S.; asc. 40 ft. over SW. slope.

40.49 Point for the $\frac{1}{2}$ sec. cor. of secs. 9 and 16 at propor-
tionate dist.; there is no remaining evidence of the
original cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 4 ins.
in the ground to bedrock, and in a mound of stone, 5 ft.
base to top, with brass cap mkd.

T2N	R25E
$\frac{1}{2}$	S9
	S16
1963	

Asc. 80 ft. over SW. slope.

44.50 Spur, projects S.; thence by triangulation; desc. 140 ft.
over SE. slope.

48.00 Birch Creek, intermittent seeps along bottom of creek,
course SW., irregularly; asc. 300 ft. over W. slope.

64.00 Spur, projects SW.; end of triangulation; desc. 40 ft.
along S. slope.

80.98 The cor. of secs. 9, 10, 15 and 16.

Dependent Resurvey of the Subdivision of T. 2 N., R. 25 E.

CLASS

Land, mountainous.
Soil, rocky.
Timber, juniper and pinon.
Undergrowth, sagebrush.

N. 0°06' E., bet. secs. 9 and 10.

Over mountainous land through dense juniper and pinon;
asc. 320 ft. over S. slope.

19.60 Spur, projects SW.; thence by triangulation; desc. 240
ft. over NW. slope.

30.00 Birch Creek, intermittent seeps along bottom of creek,
course SW.; asc. 200 ft. over W. slope.

39.23 The $\frac{1}{4}$ sec. cor. of secs. 9 and 10, monumented with a
quartzite stone, 12x7x3 ins., set, mkd. and witnessed
as described in the official record.

From which the original bearing trees:

A juniper, 12 ins. diam., bears S. 78°45' E.,
42 lks. dist., mkd. $\frac{1}{4}$ S10 BT.

A juniper, 14 ins. diam., bears N. 40° W., 12
lks. dist., mkd. $\frac{1}{4}$ S9 BT.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 4 ins.
in the ground to bedrock, and in a mound of stone, 5
ft. base to top, with brass cap mkd.

T2N R25E
 $\frac{1}{4}$
S9|S10
1963

Deposit the original stone alongside the iron post.

N. 1°23' W., beginning new measurement.

Asc. 100 ft. over SW. slope.

7.50 Spur, projects W.; thence by triangulation; asc. 460
ft. over SW. slope through dense juniper and pinon.

43.45 End of triangulation.

43.51 The cor. of secs. 3, 4, 9 and 10, monumented with a
sandstone, 4x3x2 ft., above ground, mkd. "X" at the cor.
point, and witnessed as described in the official record.

From which the original bearing trees:

A juniper, 12 ins. diam., bears N. 51°15' E.,
15 lks. dist., mkd. T2N R25E S3 BT.

A juniper, 24 ins. diam., bears S. 13°15' E., 13
lks. dist., mkd. T2N R25E S10 BT.

A juniper, 14 ins. diam., bears S. 47°45' W.,
37 lks. dist., mkd. T2N R25E S9 BT.

A juniper, 10 ins. diam., bears N. 31°30' W.,
17 lks. dist., mkd. T2N R25E S4 BT.

At the cor. point

Dependent Resurvey of the Subdivision of T. 2 N., R. 25 E.

CHAINS	
	<p>Set an iron post, 30 ins. long, 2½ ins. diam., on solid sandstone and in a mound of stone, 7 ft. base to top, with brass cap mkd.</p> <p style="text-align: center;"> T2N R25E S4 S3 S9 S10 1963 </p> <p>Land, mountainous. Soil, rocky. Timber, juniper and pinon. Undergrowth, sagebrush.</p>
	<p>From the cor. of secs. 4, 5, 8 and 9, previously described.</p> <p>N. 89°05' E., bet. secs. 4 and 9.</p> <p>Over mountainous land through dense juniper and pinon; by triangulation; desc. 60 ft. over E. slope.</p>
2.50	Willow Creek, 6 ins. deep, 5 lks. wide, course S., irregularly; asc. 300 ft. over W. slope.
15.50	Small spur, projects NW.; asc. 320 ft. over NW. slope.
40.05	<p>The ¼ sec. cor. of secs. 4 and 9, monumented with a sandstone, 18x10x7 ins., set, mkd. and witnessed as described in the official record.</p> <p>At the cor. point</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.</p> <p style="text-align: center;"> T2N R25E ¼ S4 S9 1963 </p> <p>Deposit the original stone alongside the iron post.</p> <hr style="width: 20%; margin: auto;"/> <p>N. 89°57' E., beginning new measurement.</p> <p>Asc. 300 ft. over NW. slope.</p>
26.50	Spur, projects SW.; thence along broken S. slope.
40.35	<p>The cor. of secs. 3, 4, 9 and 10, previously described.</p> <p>Land, mountainous. Soil, rocky. Timber, juniper and pinon. Undergrowth, sagebrush.</p>
	<p>N. 0°15' E., bet. secs. 3 and 4.</p> <p>Over mountainous land through dense pinon and juniper; asc. 190 ft. over ledgy S. slope.</p>
4.30	Ledge, 50 ft. high, bears E. and W.
6.00	Spur, projects W.; enter mahogany; desc. 60 ft. over NW. slope.

Dependent Resurvey of the Subdivision of T. 2 N., R. 25 E.

ELEVATIONS

- 11.00 Head of draw, drains W.; asc. 300 ft. over steep S. slope.
- 27.90 S. crest of ridge; bears E. and W.; thence across rolling mountain top.
- 40.07 The $\frac{1}{4}$ sec. cor. of secs. 3 and 4, monumented with a sandstone, 14x8x4 ins., set, mkd. and witnessed as described in the official record.
- From which the original bearing tree:
- A pinon, 18 ins. diam., bears N. 56°35' W.,
231 lks. dist., mkd. $\frac{1}{4}$ S4 BT.
- At the cor. point
- Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.
- T2N R25E
 $\frac{1}{4}$
S4|S3
1963
- Deposit the original stone alongside the iron post and raise a mound of stone, 3 ft. base, 2 $\frac{1}{2}$ ft. high, W. of cor.
- _____
- N. 0°09' E., beginning new measurement.
- Over rolling mountain top through scattering pinon, pine and mahogany.
- Desc. 60 ft. over N. slope.
- 8.80 Enter dense mahogany and scattering pine and pinon.
- 29.90 Draw, drains W.; asc. 25 ft. over S. slope.
- 33.90 Spur, projects W.; desc. 30 ft. over NW. slope.
- 39.97 The cor. of secs. 3, 4, 33 and 34, on the N. bdy. of the Tp., monumented with an iron post, 2 $\frac{1}{2}$ ins. diam., set, mkd. and witnessed as described in the official record.
- Land, mountainous.
Soil, rocky.
Timber, juniper, pinon, mahogany and scattering pine.
Undergrowth, sagebrush.
-
- From the cor. of secs. 2, 3, 34 and 35 on the S. bdy. of the Tp., previously described.
- N. 0°45' W., bet. secs. 34 and 35.
- Over rolling land through heavy sagebrush and greasewood.
- 15.30 Wash, 6 ft. deep, 20 lks. wide, drains W.
- 29.50 Road, graded, bears N. 79° W. and S. 79° E.
- 31.20 Power line, 4 wire, bears N. 79° W. and S. 79° E.
- 40.22 The $\frac{1}{4}$ sec. cor. of secs. 34 and 35, monumented with a sandstone, 16x8x8 ins., set, mkd. and witnessed as described in the official record.

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T2N R25E

½
S34 | S35
1963

Deposit the original stone alongside the iron post and raise a mound of stone, 3 ft. base, 2½ ft. high, W. of cor.

N. 0°30' E., beginning new measurement.

30.70 Wash, 6 ft. deep, 20 lks. wide, drains S. 80° W.

40.47 The cor. of secs. 26, 27, 34 and 35, monumented with a sandstone, 18x5x3 ins., set, mkd. and witnessed as described in the official record.

From which the original bearing trees:

- A dead juniper, 5 ins. diam., bears N. 56° E., 20 lks. dist., mkd. T2N R25E S26 BT.
- A dead juniper, 30 ins. diam., bears S. 68°30' E., 120 lks. dist., mkd. T2N R25E S35 BT.
- A dead juniper, 20 ins. diam., bears S. 7°30' W., 208 lks. dist., mkd. T2N R25E S34 BT.
- A juniper, 30 ins. diam., bears N. 45° W., 2 lks. dist., mkd. T2N R25E S27 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T2N R25E

S27 | S26
S34 | S35
1963

Deposit the original stone alongside the iron post.

Land, rolling.
Soil, sandy clay.
Timber, scattering juniper.
Undergrowth, sagebrush, greasewood and shadscale.

From the cor. of secs. 27, 28, 33 and 34, previously described.

N. 89°41' E., bet. secs. 27 and 34.

Over rolling land; desc. 50 ft. over E. slope.

1.40 Power line, 2 wire, bears N. and S.

3.70 Willow Creek, 12 ins. deep, 10 lks. wide, course S.; enter dense willow.

7.10 Leave willows; enter cultivated field.

11.00 Leave field; irrigation ditch, 1 ft. deep, course S.; asc. 90 ft. over W. slope through scattering juniper and sagebrush.

Dependent Resurvey of the Subdivision of T. 2 N., R. 25 E.

CHAINS

- 15.70 Spur, projects S.; desc. 80 ft. over E. slope.
- 20.30 Fence, barbed wire, bears N. and S.
- 33.60 Draw, drains S.; asc. gradually over W. slope.
- 35.20 Trail road, bears N. and S.
- 37.20 Wash, 6 ft. deep, 25 lks. wide, drains S.
- 40.37 The $\frac{1}{2}$ sec. cor. of secs. 27 and 34, monumented with a sandstone, 18x14x5 ins, set, mkd and witnessed as described in the official record.
- From which the original bearing trees:
- A juniper, 14 ins. diam., bears N. 63°45' E.,
24 lks. dist, mkd. $\frac{1}{2}$ S27 BT.
- A juniper, 16 ins. diam, bears S. 48°15' E.,
56 lks. dist., mkd. $\frac{1}{2}$ S34 BT.
- At the cor. point
- Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.
- T2N R25E
 $\frac{1}{2}$ $\frac{S27}{S34}$
1963
- Deposit the original stone alongside the iron post and raise a mound of stone, 3 ft. base, 2 $\frac{1}{2}$ ft. high, N. of cor.
-
- N. 89°39' E., beginning new measurement.
- Continue over rolling land through scattering juniper; asc. 105 ft. over W. slope.
- 18.00 Low ridge, bears N. and S.; desc. 60 ft. over E. slope.
- 23.60 Wash, 8 ft. deep, 70 lks. wide, drains SE.
- 35.20 Wash, 5 ft. deep, 30 lks. wide, drains S. 20° W.; asc. gradually over SW. slope.
- 40.09 The cor. of secs. 26, 27, 34 and 35, previously described.
- Land, rolling.
Soil, sandy clay.
Timber, scattering juniper.
Undergrowth, sagebrush and shadscale; willows along Willow Creek.
-
- N. 89°59' E., bet. secs. 26 and 35.
- Over rolling bench land through scattering juniper and heavy sagebrush and shadscale; asc. 30 ft. over gentle SW. slope.
- 11.50 Wash, 5 ft. deep, 50 lks. wide, drains SW.
- 24.10 Begin steep asc., bears NW. and SE.; asc. 110 ft. over W. slope.

Dependent Resurvey of the Subdivision of T. 2 N., R. 25 E.

CHAINS

32.40 Top of asc., bears NW. and SE.; thence along gentle S. slope; desc. gradually.

40.09 The $\frac{1}{2}$ sec. cor. of secs. 26 and 35, monumented with a sandstone, 12x6x6 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T2N R25E
 $\frac{1}{2}$ S26
S35
1963

Deposit the original stone alongside the iron post.

N. $89^{\circ}54'$ E., beginning new measurement.

Desc. gradually along gentle S. slope through heavy sagebrush and shadscale.

3.30 Dirt road, unimproved, bears N. and S.

16.50 Wash, 1 ft. deep, 5 lks. wide, drains S.

42.69 Intersect the Utah-Colorado State Line.

The closing cor. of secs. 26 and 35, monumented with a quartzite stone, set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T2N | C
R25E | O
 | L
 | O
CC —| R
S35 | A
 | D
 | O
 |
 1963

Deposit the original stone alongside the iron post and raise a mound of stone, 3 ft. base, $2\frac{1}{2}$ ft. high, W. of cor.

From this cor., the 269 Mi. Cor. on the Utah-Coloardo State Line bears N. $0^{\circ}18'$ W., 80.30 chs. dist. and is monumented with an iron post, $2\frac{1}{2}$ ins. diam., set, mkd. and witnessed as described in the field notes of the 1963 retracement of the Utah-Colorado State Line.

Land, gently rolling.
Soil, sandy clay.
Timber, scattering juniper.
Undergrowth, sagebrush and shadscale.

From the cor. of secs. 26, 27, 34 and 35, previously described.

Dependent Reurvey of the Subdivision of T, 2 N., R. 25 E.

CRANES

N. 0°10' W., bet. secs. 26 and 27.

Over rolling and broken bench land through scattering juniper; asc. 105 ft. over S. slope.

22.00 Low ridge, bears NE. and SW.; desc. 65 ft. over NW. slope.

27.30 Draw, drains SW.; asc. gradually over S. slope.

31.90 Wash, 7 ft. deep, 40 lks. wide, drains S., irregularly.

36.40 Small wash, drains SE.

40.28 The $\frac{1}{4}$ sec. cor. of secs. 26 and 27, monumented with a sandstone, 16x10x4 ins., set and mkd. as described in the official record; there is no remaining evidence of the original bearing trees.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T2N R25E

$\frac{1}{4}$

S27|S26

1963

Deposit the original stone alongside the iron post and raise a mound of stone, 3 ft. base, 2 $\frac{1}{2}$ ft. high, W. of cor.

N. 0°04' W., beginning new measurement.

Asc. 80 ft. over broken S. slope.

34.30 Wash, 15 ft. deep, 1.20 lks. wide, drains S. 20° W.

40.31 The cor. of secs. 22, 23, 26 and 27, monumented with a sandstone, 18x9x3 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T2N R25E

S22|S23

S27|S26

1963

Deposit the original stone alongside the iron post and set a cedar post, 4 ins. diam., 6 ft. long, 18 ins. in the ground alongside the iron post.

Land, rolling.

Soil, sandy clay.

Timber, scattering juniper.

Undergrowth, sagebrush and shadscale.

From the true point for the cor. of secs. 21, 22, 27 and 28.

N. 89°39' E., bet. secs. 22 and 27.

Over cultivated land.

Dependant Resurvey of the Subdivision of T. 2 N., R. 25 E.

CHAINS

- 1.88 Fence, net wire, bears NW. and SE.; leave field; asc. 65 ft. over broken SW. slope through scattering juniper.
- 1.90 Point selected for the witness cor. of secs. 21, 22, 27 and 28.
- Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
- T2N R25E
WC ← $\frac{S21}{S28} | \frac{S22}{S27}$
1963
- 16.30 Low ridge, bears N. and S.; desc. 40 ft. over E. alope.
- 23.30 Wash, 5 ft. deep, 40 lks. wide, drains SE.
- 26.70 Wash, 7 ft. deep, 40 lks. wide, drains S.; asc. 85 ft. over SW. slope.
- 28.50 Trail road, bears N. and S.
- 32.00 Spur, projects S.; desc. 15 ft. over SE. slope.
- 40.21 Point for the ¼ sec. cor. of secs. 22 and 27 at proportionate dist.; there is no remaining evidence of the original cor.
- Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
- T2N R25E
¼ $\frac{S22}{S27}$
1963
- Desc. 75 ft. over SE. slope.
- 49.60 Wash, 2 ft. deep, 20 lks. wide, drains SW.; asc. 70 ft. over W. slope.
- 56.00 Spur, projects S.; desc. 15 ft. over SE. slope.
- 60.00 Draw, drains S.; asc. 80 ft. over W. slope.
- 66.00 Top of asc.; thence along broken S. slope.
- 70.10 Small draw, drains S.
- 77.20 Wash, 7 ft. deep, 15 lks. wide, drains S.
- 80.42 The cor. of secs. 22, 23, 27 and 26, previously described.
- Land, rolling.
Soil, sandy clay.
Timber, scattering juniper.
Undergrowth, sagebrush and shadscale.
-
- N. 89°53' E., bet. secs. 23 and 26.
- Over rolling land through scattering juniper and heavy sagebrush.
- 3.30 Small draw, drains S.; asc. 45 ft. over W. slope.
- 9.00 Spur, projects S.; desc. 20 ft. over E. slope.

Dependent Resurvey of the Subdivision of T. 2 N., R. 25 E.

CORNERS

17.20 Draw, drains S.; asc. 150 ft. over broken W. slope.

32.50 Spur, projects S.; desc. 50 ft. over SE. slope.

40.04 The $\frac{1}{4}$ sec. cor. of secs. 23 and 26, monumented with a sandstone, 18x8x4 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.

T2N R25E

$\frac{1}{4}$ S23
S26
1963

Deposit the original stone alongside the iron post and raise a mound of stone, 3 ft. base, $2\frac{1}{2}$ ft. high, N. of cor.

S. $89^{\circ}43'$ E., beginning new measurement.

Desc. gradually over gently rolling SE. slope through scattering juniper and heavy sagebrush.

8.70 Wash, 3 ft. deep, 10 lks. wide, drains S.

22.00 Wash, 3 ft. deep, 20 lks. wide, drains S.

37.40 Dirt road, unimproved, bears NE. and SW.

42.44 Intersect the Utah-Colorado State Line.

The closing cor. of secs. 23 and 26, which is identical to the 269 Mi. Cor. on the Utah-Colorado State Line, and is monumented with an iron post, $2\frac{1}{2}$ ins. diam., set, mkd. and witnessed as described in the 1963 retracement of the Utah-Colorado State Line.

Land, gently rolling.

Soil, sandy clay.

Timber, juniper.

Undergrowth, sagebrush and shadscale.

From the cor. of secs. 22, 23, 26 and 27, previously described.

N. $0^{\circ}08'$ W., bet. secs. 22 and 23.

Over rolling and broken bench land through scattering juniper and heavy sagebrush; asc. 120 ft. over SW. slope.

20.00 Wash, 1 ft. deep, 20 lks. wide, drains SW.

37.50 Wash, 7 ft. deep, 30 lks. wide, drains SW.

40.21 The $\frac{1}{4}$ sec. cor. of secs. 22 and 23, monumented with a sandstone, 16x7x3 ins., set, mkd. and witnessed as described in the official record.

From which the original bearing trees:

A juniper, 12 ins. diam., bears S. $65^{\circ}30'$ E., 180 lks. dist., mkd. $\frac{1}{4}$ S23 BT.

Dependent Resurvey of the Subdivision of T. 2 N., R. 25 E.

CHAINS

A juniper, 14 ins. diam., bears N. 53°45' W.,
103 lks. dist., mkd. $\frac{1}{4}$ S22 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T2N R25E

$\frac{1}{4}$
S22|S23
1963

Deposit the original stone alongside the iron post and
raise a mound of stone, 3 ft. base, 2½ ft. high, W. of
cor.

N. 0°22' W., beginning new measurement; asc. 220 ft. over
SW. slope through scattering juniper.

26.10 Wash, 4 ft. deep, 25 lks. wide, drains SW.

40.41 The cor. of secs. 14, 15, 22 and 23, monumented with a
porphyry stone, 24x10x8 ins., set, mkd. and witnessed
as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T2N R25E

S15|S14
S22|S23
1963

Deposit the original stone alongside the iron post and
raise a mound of stone, 3 ft. base, 2½ ft. high, W. of
cor.

Land, rolling bench land.
Soil, sandy clay.
Timber, juniper.
Undergrowth, sagebrush and shadscale.

From the cor. of secs. 15, 16, 21 and 22, previously
described.

S. 89°57' E., bet. secs. 15 and 22.

Over rolling bench land through dense juniper; by tri-
angulation; asc. gradually along broken S. slope.

1.00 Draw, drains SE.

4.00 Trail road, bears NW. and SE.

39.50 Spur, projects S.; end of triangulation.

39.87 The $\frac{1}{4}$ sec. cor. of secs. 15 and 22, monumented with a
quartzite stone, 16x6x5 ins., set, mkd. and witnessed
as described in the official record.

From which the original bearing tree:

A juniper, 8 ins. diam., bears N. 27°15' E.,
47 lks. dist., mkd. $\frac{1}{4}$ S15 BT.

Dependent Resurvey of the Subdivision of T. 2 N., R. 25 E.

CUSANS

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 14 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T2N R25E

¼ S15
S22

1963

Deposit the original stone alongside the iron post.

N. 88°55' E., beginning new measurement.

By triangulation; asc. 160 ft. over broken SW. slope.

- 2.00 Draw, drains S.
- 10.00 Draw, drains SW.
- 21.00 Draw, drains SW., irregularly.
- 40.10 The cor. of secs. 14, 15, 22 and 23, previously described.

Land, rolling bench land.
Soil, sandy clay.
Timber, juniper.
Undergrowth, sagebrush.

S. 89°59' E., bet. secs. 14 and 23.

Over rolling and slightly mountainous land through dense juniper; by triangulation; desc. gradually along S. slope.

- 13.00 Draw, drains S.; thence over steep W. slope; asc. 200 ft.
- 28.43 End of triangulation; ridge, bears N. and S.; desc. 160 ft. over broken E. slope.
- 30.70 Draw, drains SE.
- 33.70 Draw, drains SE.
- 40.26 The ¼ sec. cor. of secs. 14 and 23, monumented with a sandstone, 15x7x3 ins., set, mkd. and witnessed as described in the official record.

From which the original bearing trees:

- A juniper, 12 ins. diam., bears S. 44°30' W., 52 lks. dist., mkd. ¼ S23 BT.
- A juniper, 8 ins. diam., bears N. 41°30' W., 15 lks. dist., mkd. ¼ S14 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T2N R25E

¼ S14
S23

1963

Deposit the original stone alongside the iron post.

Dependent Resurvey of the Subdivision of T. 2 N., R. 25 E.

CHAINS

S. 89°57' E., beginning new measurement.

By triangulation; desc. 60 ft. over SE. slope.

17.00 Trail road, bears N. and S.


21.50 Beaver Creek, 4 ins. deep, 10 lks. wide, course S. 20° E.; asc. 200 ft. over SW. slope.

41.88 Intersect the Utah-Colorado State Line.

The closing cor. of secs. 14 and 23, which is monumented with a sandstone, 15x10x5 ins., set, and mkd. as described in the official record; there is no remaining evidence of the original cottonwood bearing trees.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 5 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

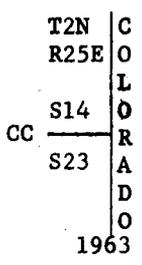

Deposit the original stone alongside the iron post.

From this cor., the 270 Mi. Cor. on the Utah-Colorado State Line bears N. 0°31' W., 1.35 chs. dist., and is monumented with an iron post, 2½ ins. diam., set, mkd. and witnessed as described in the field notes of the 1963 retracement of the Utah-Colorado State Line.

Land, rolling and slightly mountainous.
Soil, sandy clay and rocky.
Timber, juniper; scattering cottonwood in Beaver Creek Canyon.
Undergrowth, sagebrush.

From the cor. of secs. 14, 15, 22 and 23, previously described.

N. 0°05' E., bet. secs. 14 and 15.

Over mountainous land through dense juniper and pinon; by triangulation; asc. 240 ft. over SW. slope.

26.00 Draw, drains SW.

40.43 The ¼ sec. cor. of secs. 14 and 15, monumented with a quartzite stone, 18x8x7 ins., set, mkd. and witnessed as described in the official record.

From which the original bearing trees:

- A juniper, 8 ins. diam., bears N. 72° E., 10 lks. dist., mkd. ¼ S14 BT.
- A juniper, 14 ins. diam., bears S. 71° W., 18 lks. dist., mkd. ½ S15 BT.

At the cor. point

Dependent Resurvey of the Subdivision of T. 2 N., R. 25 E.

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 4 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T2N R25E

$$\frac{1}{2}$$

S15		S14
1963		

Deposit the original stone alongside the iron post.

N. $0^{\circ}24'$ W., beginning new measurement.

Continue by triangulation; asc. 760 ft. over SW. slope.

38.27 End of triangulation.

The cor. of secs. 10, 11, 14 and 15, monumented with a quartzite stone, 18x8x6 ins., set, mkd. and witnessed as described in the official record.

From which the original bearing trees:

A dead juniper, 4 ins. diam., bears N. $60^{\circ}30'$ E., 16 lks. dist., mkd. T2N R25E S11 BT.

A dead juniper, 10 ins. diam., bears S. 25° E., 40 lks. dist., mkd. T2N R25E S14 BT.

A dead juniper, 10 ins. diam., bears S. 63° W., 24 lks. dist., mkd. T2N R25E S15 BT.

A dead juniper, 5 ins. diam., bears N. $29^{\circ}15'$ W., 16 lks. dist., mkd. T2N R25E S10 BT.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 4 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T2N R25E

S10		S11
S15		S14
1963		

Deposit the original stone alongside the iron post.

Land, mountainous.

Soil, rocky.

Timber, juniper and pinon.

Undergrowth, sagebrush.

From the cor. of secs. 9, 10, 15 and 16, previously described.

N. $89^{\circ}56'$ E., bet. secs. 10 and 15.

Over mountainous land through dense juniper and pinon; by triangulation; desc. 40 ft. along S. slope.

3.00 Head of draw, drains SE.; asc. 200 ft. over broken SW. slope.

12.00 Spur, projects S.

16.00 Draw, drains S.

21.00 Spur, projects S.

Dependent Resurvey of the Subdivision of T. 2 N., R. 25 E.

CHAINS	
24.00	Draw, drains S.
27.00	Spur, projects S.; desc. 120 ft. over E. slope.
37.76	End of triangulation.
39.26	Point selected for the witness $\frac{1}{4}$ sec. cor. of secs. 10 and 15.
	Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., on solid sandstone and in a mound of stone, 4 ft. base to top, with brass cap mkd.
	T2N R25E WC $\frac{1}{4}$ $\frac{S10}{S15}$ \rightarrow 1963
39.29	The original $\frac{1}{4}$ sec. cor. of secs. 10 and 15 is an "X" cut on the top of a quartzite boulder, 5x4x3 ft. above ground, an iron post cannot be set at this point.
	From which the original bearing trees:
	A pinon, 14 ins. diam., bears S. $84^{\circ}15'$ W., 56 lks. dist., mkd. $\frac{1}{4}$ S15 BT. A juniper, 24 ins. diam., bears N. $57^{\circ}50'$ W., 60 lks. dist., mkd. $\frac{1}{4}$ S10 BT.
	<hr style="width: 20%; margin: auto;"/>
	N. $89^{\circ}08'$ E., beginning new measurement.
	By triangulation; desc. 40 ft. over E. slope.
2.00	Ravine, drains SW.; asc. 160 ft. over SW. slope.
8.00	Spur, projects S.; desc. 80 ft. over broken S. slope.
24.00	Draw, drains S.
27.00	Spur, projects S.
30.00	Ravine, drains SW.; asc. 200 ft. over SW. slope.
40.29	The cor. of secs. 10, 11, 14 and 15, previously described.
	Land, mountainous. Soil, rocky. Timber, juniper and pinon. Undergrowth, sagebrush.
	S. $89^{\circ}44'$ E., bet. secs. 11 and 14.
	Over mountainous land through dense juniper and pinon; by triangulation; asc. 130 ft. over SW. slope.
6.00	Spur, projects SW.; desc. 250 ft. over SE. slope.
18.00	Draw, drains S.; asc. 520 ft. over SW. slope.
30.84	End of triangulation; spur, projects S.; desc. 240 ft. over SE. slope.
39.96	The $\frac{1}{4}$ sec. cor. of secs. 11 and 14, monumented with a quartzite stone, 18x10x8 ins., set, mkd. and witnessed as described in the official record.
	From which the original bearing trees:

Dependent Resurvey of the Subdivision of T. 2 N., R. 25 E.

CHAINS

A juniper, 10 ins. diam., bears S. 11°15' E., 18 lks. dist., mkd. ¼ S14 BT.
A juniper, 12 ins. diam., bears N. 35° W., 30 lks. dist., mkd. ¼ S11 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T2N R25E
¼ S11
S14
1963

Deposit the original stone alongside the iron post.

N. 86°59' E., beginning new measurement.

By triangulation; desc. gradually along S. slope.

- 5.00 Ravine, drains SW.; asc. 260 ft. over SW. slope.
- 17.39 End of triangulation; ridge, bears NE. and SW.; desc. 680 ft. over ledgy SE. slope.
- 42.19 Intersect the Utah-Colorado State Line.

True point for the closing cor. of secs. 11 and 14 at proportionate dist.; this point is not monumented.

From this point, the witness closing cor. of secs. 11 and 14 bears S. 0°19' E., 28.72 chs. dist., and is monumented with a sandstone, 14x10x8 ins., set, and mkd. as described in the official record; there is no remaining evidence of the original bearing trees.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top; with brass cap mkd.

T2N | C
R25E | O
L
S11 | O
WCC ——— | R
S14 | A
D
O
1963

Deposit the original stone alongside the iron post.

From the same point, the 271 Mi. Cor. on the Utah-Colorado State Line bears N. 0°19' W., 1.78 chs. dist., and is monumented with an iron post, 2 ins. diam., set, mkd. and witnessed as described in the official record.

Land, mountainous.
Soil, rocky.
Timber, juniper, and pinon.
Undergrowth, sagebrush.

From the cor. of secs. 10, 11, 14 and 15, previously

CHAINS

described.

N. 0°16' E., bet. secs. 10 and 11.

Over mountainous land through dense juniper and pinon; asc. 800 ft. over ledgy and broken SW. slope, changing to S. slope; by triangulation.

42.38 End of triangulation.

The $\frac{1}{2}$ sec. cor. of secs. 10 and 11, monumented with a sandstone, 24x18x10 ins., set, mkd. and witnessed as described in the official record.

From which the original bearing trees:

A mahogany, 8 ins. diam., bears S. 43° E.,
12 lks. dist., mkd. $\frac{1}{2}$ S11 BT.

A mahogany, 6 ins. diam., bears N. 61°30' W.,
32 lks. dist., mkd. $\frac{1}{2}$ S10 BT.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 5 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T2N R25E

$$\begin{array}{c} \frac{1}{2} \\ \text{S10} | \text{S11} \\ 1963 \end{array}$$

Deposit the original stone alongside the iron post.

N. 0°07' W., beginning new measurement.

Asc. 30 ft. over S. slope through dense mahogany, juniper and pinon.

18.50 Ridge, bears E. and W.; desc. 170 ft. over N. slope.

19.70 Leave dense timber; continue through scattering patches of mahogany, juniper and pine.

25.70 Draw, drains W.; asc. 280 ft. over S. slope.

39.66 The cor. of secs. 2, 3, 10 and 11, monumented with a sandstone, 18x10x6 ins., set, mkd. and witnessed as described in the official record.

From which the original bearing tree:

A mahogany, 8 ins. diam., bears N. 17°45' W.,
200 lks. dist., mkd. T2N R25E S3 BT.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 5 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T2N R25E

$$\begin{array}{c} \text{S3} | \text{S2} \\ \text{S10} | \text{S11} \\ 1963 \end{array}$$

Deposit the original stone alongside the iron post.

Dependent Resurvey of the Subdivision of T. 2 N., R. 25 E.

CHAIN

Land, mountainous.
Soil, rocky.
Timber, juniper, mahogany, pinon and scattering pine.
Undergrowth, sagebrush.

From the cor. of secs. 3, 4, 9 and 10, previously described.

S. 89°48' E., bet. secs. 3 and 10.

Over mountainous land through scattering mahogany and juniper; asc. 80 ft. over SW. slope.

- 4.80 Spur, projects SE.; thence by triangulation; desc. 280 ft. over E. slope.
- 18.00 Draw, drains SE.; asc. 100 ft. over SW. slope.
- 27.00 Spur, projects S.; desc. 120 ft. over SE. slope.
- 33.00 Ravine, drains SW.; asc. 160 ft. over NW. slope of spur.
- 40.44 End of triangulation.

Point for the ¼ sec. cor. of secs. 3 and 10 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T2N R25E
¼ $\frac{S3}{S10}$
1963

Continue over NW. slope, changing to N. slope; asc. 40 ft.

- 47.80 Draw, drains NW.; asc. 560 ft. over SW. slope.
- 80.88 The cor. of secs. 2, 3, 10 and 11, previously described.

Land, mountainous.
Soil, rocky.
Timber, juniper, mahogany, pinon and scattering pine.
Undergrowth, sagebrush.

S. 89°46' E., bet. secs. 2 and 11.

Over mountainous land through scattering mahogany; by triangulation; desc. 120 ft. along ledgy S. slope.

- 17.00 Draw, drains SW.; asc. 240 ft. over ledgy SW. slope.
- 40.80 End of triangulation.

The ¼ sec. cor. of secs. 2 and 11, monumented with a sandstone, 14x5x3 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

CHAINS

T2N R25E

¼ S2
S11

1963

Deposit the original stone alongside the iron post.

N. 89°56' E., beginning new measurement.

Continue over SW. slope through scattering mahogany; asc. 240 ft.

40.32 Intersect the Utah-Colorado State Line.

The closing cor. of secs. 2 and 11, monumented with a sandstone, 14x12x4 ins., set, mkd. and witnessed as described in the official record.

From which the original bearing tree:

A mahogany, 10 ins. diam., bears N. 68°45' W., 127 lks. dist., mkd. T2N R25E S2 CC BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to bedrock, and in a mound of stone, 5 ft. base to top, with brass cap mkd.

T2N		C
R25E		O
		L
S2		O
CC	—	R
S11		A
		D
		O
		1963

Deposit the original stone alongside the iron post.

From this cor., the 272 Mi. Cor. on the Utah-Coloardo State Line bears N. 0°27' W., 3.78 chs. dist., and is monumented with an iron post, 2½ ins. diam., set, mkd. and witnessed as described in the field notes of the 1963 retracement of the Utah-Colorado State Line.

Land, mountainous.
Soil, rocky.
Timber, scattering mahogany.
Undergrowth, sagebrush.

From the cor. of secs. 2, 3, 10 and 11, previously described.

N. 0°07' E., bet. secs. 2 and 3.

Over rolling mountain top through scattering mahogany, juniper, pine and pinon.

Asc. 70 ft. over S. slope.

5.20 Spur, projects W.; desc. 110 ft. over N. slope.

13.00 Draw, drains W.; asc. 360 ft. over S. slope.

28.70 Top of ledge, 80 ft. high, bears E. and W.

Dependent Resurvey of the Subdivision of T. 2 N., R. 25 E.

CHAINS

39.91

The $\frac{1}{4}$ sec. cor. of secs. 2 and 3, monumented with a sandstone, 14x12x6 ins., set, mkd. and witnessed as described in the official record.

From which the original bearing trees:

A mahogany, 12 ins. diam., bears N. $34^{\circ}30'$ W.,
50 lks. dist., mkd. $\frac{1}{4}$ S3 BT.

A mahogany, 10 ins. diam., bears S. $70^{\circ}30'$ E.,
112 lks. dist., mkd. $\frac{1}{4}$ S2 BT.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T2N R25E

$\frac{1}{4}$

S3|S2

1963

Deposit the original stone alongside the iron post.

N. $0^{\circ}03'$ W., beginning new measurement.

Asc. 50 ft. over S. slope.

2.60

Trail road, bears E. and W.

20.00

Begin desc. over N. slope; desc. 90 ft.

40.36

The cor. of secs. 2, 3, 34 and 35, on the N. bdy. of the Tp., monumented with an iron post, $2\frac{1}{2}$ ins. diam., set, mkd. and witnessed as described in the official record.

Land, rolling and mountainous.

Soil, rocky.

Timber, scattering mahogany, juniper, pinon and pine.

Undergrowth, sagebrush.

Present Meander of the Left Bank
of the
Green River in Sec. 19

Note: The present river banks of the Green River were meandered as a basis for new lottings and area of vacant public lands bordering the river, and only as a traverse line for topographic purposes fronting non-public lands.

Through sections 30 and 31, the river bordering vacant public lands closely agrees with the original survey showing and therefore, in accordance with the special instructions, the river was not re-meandered through this part of the township.

From the meander cor. of secs. 19 and 24 on the West boundary of the township on the left bank of the Green River.

Thence downstream with meanders of the left bank in section 19.

S. $55^{\circ}15'$ E., 4.30 chs.

S. $43^{\circ}30'$ E., 5.00 chs.

S. $33^{\circ}30'$ E., 3.00 chs.

Dependent Resurvey of the Subdivision of T. 2 N., R. 25 E.

CHAINS

- S. 8°15' E., 7.70 chs.
- S. 9°30' W., 5.00 chs.
- S. 57°30' W., 8.80 chs.
- S. 66°44' W., 1.80 chs. to the witness meander cor. of sec. 24, T. 2 N., R. 24 E. on the left bank of the Green River. This cor. will also function as the meander cor. for sec. 19, T. 2 N., R. 25 E.

General Description

The land within Township 2 North, Range 25 East ranges from gently rolling bench land in the south 3 tiers of the township to extremely mountainous land in the north 3 tiers. The elevation of the township ranges from about 8400 ft. above sea level in the NE. cor. of the township to about 5400 ft. above sea level in the SW. cor. of the township. Drainage is generally to the south to the Green River. The Green River enters the township through the northwest corner of sec. 19 on the West boundary of the township, and leaves north of the 1/4 sec. cor. of secs. 19 and 24 on the same boundary, re-enters the township through the middle of the West boundary of sec. 30, and leaves through the northwest cor. of sec. 31, re-enters at the 1/4 sec. cor. of secs. 25 and 31 on the West boundary, and leaves the township about 7.00 chs. W. of the 1/4 sec. cor. of secs. 6 and 31 on the South boundary of the township.

The soil in the higher elevations is principally sandy clay and rocky and covered with scattering to dense growths of juniper, pinon, mahogany and pine. The soil in the lower elevations is principally sandy clay and covered with a heavy growth of sagebrush and shadscale and scattering growth of juniper.

Access to the township is mainly by a graded and well maintained, gravelled road that enters the township through the southeast corner of sec. 35, and bears in a westward direction to the middle of sec. 32, then turns in a northwesterly direction, crossing back and forth over the West boundary, leaving the township through the southwest corner of sec. 6. Numerous other unimproved dirt roads and trail roads provide access to most of the township.

Willow Creek enters the township through the middle of the North boundary of sec. 4, and leaves the township through the South boundary of sec. 34. This creek flows the entire year and provides irrigation water for the Willow Creek Ranch which is located along the sides of Willow Creek and extends from about the center of sec. 21 to the South boundary of the township. Beaver Creek enters through the East boundary of sec. 14 and flows in a southerly direction, leaving the township through the East boundary of sec. 23. There are several other intermittent seeps along the bottoms of some of the canyons in the northern portion of the township.

CERTIFICATE OF SURVEY

I, Fred R. Chappell, HEREBY CERTIFY upon honor that in pursuance of special instructions bearing date of the 25th day of May, 19 62 I have made a dependent resurvey of the South boundary and the subdivisional lines of Township 2 North, Range 25 East

of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by me and under my direction and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

May 27, 1965
(Date)

Fred R. Chappell
(Cadastral Surveyor)

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

SUBMITTED FOR APPROVAL
Date AUG 6 1965

BUREAU OF LAND MANAGEMENT
Washington, D. C.

The foregoing field notes of the dependent resurvey of the South boundary and the subdivisional lines of Township 2 North, Range 25 East,

executed by Fred R. Chappell, Cadastral Surveyor, having been critically examined and found correct, are hereby approved.

DEC 22 1965
(Date)

E. J. Remington
(Chief, Division of Engineering)

CERTIFICATE OF TRANSCRIPT

~~I CERTIFY That the foregoing transcript of the field notes of the above described surveys in~~
~~, is a true copy of the original field notes.~~

(Date)

(Chief, Division of Engineering)

Blank

Page

Blank

Page

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD NOTES

OF THE
DEPENDENT RESURVEY

OF THE
SOUTH BOUNDARY

AND THE
SUBDIVISIONAL LINES

OF
TOWNSHIP 3 NORTH, RANGE 25 EAST

Of the SALT LAKE Meridian,

In the State of UTAH

EXECUTED BY

Fred R. Chappell Cadastral Surveyor

Under special instructions dated May 25, 19 62, which provided for the surveys
included under Group Number 456, approved June 8, 1962,
and assignment instructions dated June 8,, 19 62.

Survey commenced September 20, 19 63

Survey completed October 17, 19 63

DEPT. OF THE INTERIOR
BUR OF LAND MGMT

1966 FEB 18 AM 11 22 .4

RECEIVED
STATE & LAND OFFICE
SALT LAKE CITY, UTAH

INDEX DIAGRAM

Township 3 North, Range 25 East

6	5	4	3	2	1
7	8	9	10	11	12
18 12	13 17 18	19 16 25	25 15 33	35 14 34	13
19 10	11 20 16	17 21 23	24 22 30	32 28 31	24
30 8	9 29 15	16 26 21	22 27 27	29 26 28	25
31 2	7 32 3	14 33 4	20 34 5	26 35 6	26

Dependent Resurvey of Township 3 North, Range 25 East

CHAINS

The North boundary, or the Utah-Wyoming State Line between the northeast corner of Utah and the 268 Mile Post, was surveyed by A. V. Richards in 1873, retraced by A. Jessen in 1898 in connection with the survey of T. 3 N., R. 25 E., Utah, retraced in 1910 by H. Jaeckal and E. Voigt in connection with Wyoming surveys, and retraced with remonumentation from the 267 to the 268 Mile Post in 1962 by Fred R. Chappell in connection with the resurvey of T. 3 N., R. 24 E., Utah, and concurrently retraced with remonumentation of corners found between the northeast corner of Utah and the 267 Mile Post by Fred R. Chappell under this same group. The East boundary, or the Utah-Colorado State Line between the 272 Mile Corner and the northeast cor. of Utah, was surveyed in 1879 by Rollin J. Reeves, retraced in 1898 by A. Jessen in connection with the survey of T. 3 N., R. 25 E., Utah, retraced between Mile Corner 273 and the northeast corner of Utah in 1909 by R. Clark in connection with Colorado surveys, retraced between Mile corner 272 and Mile Corner 273 in 1937 by G. Eslinger in connection with Colorado surveys, and concurrently retraced with the remonumentation of corners found between Mile Corner 272 and the northeast corner of Utah by Fred R. Chappell under this same group. The South boundary was surveyed by A. Jessen in 1898 and the record appears in the field notes of T. 2 N., R. 25 E. The West boundary was surveyed in 1898 by A. Jessen and dependently resurveyed in 1962, under Group 456, by Fred R. Chappell, and the record appears in the field notes of T. 3 N., R. 24 E. The subdivisional lines were surveyed by A. Jessen in 1898.

The following field notes are those of the dependent resurvey of the South boundary and the subdivisional lines of T. 3 N., R. 25 E.

The survey was executed with a W. & L. E. Gurley Transit No. 591190 and a Buff and Buff Transit No. 33384. Each is equipped with a full vertical circle and improved Smith-type telescopic solar attachment, and conforms to the standard instrumental specifications of the Bureau of Land Management. The instruments were maintained in precise adjustment throughout the progress of the survey.

The direction of the lines was determined by the solar transit method.

Measurements were made with a narrow steel tape, 8 chains in length, graduated every tenth link for the first link, every link for the next 99 links, and the remainder at intervals of 10 links. The tape was tested by comparison with a one chain standard steel tape and found to be correct. All measurements were made on the slope and the vertical angle of each interval ascertained by a clinometer in good adjustment. The horizontal equivalents alone are entered in the field note record. The lengths of all lines were determined by chaining where possible. Otherwise by traverses and triangulation. The details of such traverses and triangulations have been thoroughly verified; and, in order to simplify the record, the diagrams and reductions are omitted from these field notes. Distances to topography on lines run by traverse or triangulation are approximately as scaled from U.S.G.S. topographic sheets.

The geographic position for the southeast corner of the township is at latitude $40^{\circ}56'45.7''$ N. and longitude $109^{\circ}02'55.8''$ W., as computed from section line ties made to U.S.C. & G.S. triangulation station "UCOLWY", which is identical to the northeast corner of the township, and is at latitude $41^{\circ}00'02.6''$ N. and $109^{\circ}02'57.6''$ W.

Dependent Resurvey of the South Boundary of T. 3 N., R. 25 E.

CHAINS

The magnetic declination was read at a number of stations throughout the township and the average of these readings was found to be 16°45' E.

Dependent Resurvey of the South Boundary
of
Township 3 North, Range 25 East

Reestablishment of the Survey Executed
by A Jessen in 1898.

Beginning at the cor. of Tps. 2 and 3 N., Rs. 24 and 25 E., which is monumented with an iron post, 2½ ins. diam., mkd and witnessed as described in the field notes of the 1962 resurvey of T. 3 N., R. 24 E.

S. 89°24' E., bet. secs. 6 and 31.

Desc. 50 ft. along grassy N. slope through heavy sage-brush and scattered juniper.

- 1.69 Three strand barbed wire fence, bears N. and S.
33.30 Bottom of descent; asc. 50 ft. along same N. slope.
39.11 The ¼ sec. cor. of secs. 6 and 31, monumented by an iron post, 2½ ins. diam., set on solid rock and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T3N R25E

¼ $\frac{S31}{S6}$

T2N
1962

From which the original bearing tree:

A juniper, 10 ins. diam., bears N. 61°35' E.,
125 lks. dist., mkd. X ¼ S31 BT.

This corner was remonumented in 1962 in connection with the resurvey of T. 3 N., R. 24 E.

S. 88°52' E., beginning new measurement.

Asc. 120 ft. over rolling mountain top through scattered pine and juniper.

- 28.40 Enter dense pinon and juniper.
34.50 Top of asc.; desc. 35 ft. over NE. slope.
40.98 The cor. of secs. 5, 6, 31 and 32, monumented with a sandstone, 18x6x3 ins., firmly set and mkd. as described in the official record.

From which the original bearing trees:

A mahogany, 12 ins. diam., bears N. 76°18' E.,
84 lks. dist., mkd. T3N R25E S32 BT.
A mahogany, 10 ins. diam., bears S. 10°14' E.,
36 lks. dist., mkd. T2N R25E S5 BT.
A mahogany, 8 ins. diam., bears S. 58°16' W.,
146 lks. dist., mkd. T2N R25E S6 BT.
A mahogany, 7 ins. diam., bears N. 26°27' W.,
57 lks. dist., mkd. T3N R25E S31 BT.

At the cor. point

Dependent Resurvey of the South Boundary of T. 3 N., R. 25 E.

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T3N R25E
 S31|S32
 S6|S5
 T2N
 1963

Deposit the original stone alongside the iron post.

Land, rolling mountain top with drainage to the north. Soil, rocky clay on West ½ mile to extremely rocky on East ½ mile.

Timber, pinon and juniper; scattered on West ½ mile, dense on East ½ mile.

Undergrowth, grass and sagebrush.

S. 89°46' E., bet. secs. 5 and 32.

Desc. 220 ft. over rocky NE. slope, changing to E. slope through scattered mahogany and medium dense pinon and juniper.

13.30 Unimproved dirt road, bears N. and S.; leave timber.

14.80 Water trough at Cottonwood Spring bears S., 2.00 chs. dist.; asc. 320 ft. over a SW. slope.

40.25 The ¼ sec. cor. of secs. 5 and 32, monumented with a quartzite stone, 15x15x6 ins., firmly set and mkd. as described in the official record.

From which the original bearing trees:

A juniper, 16 ins. diam., bears S. 46° W., 242 lks. dist., mkd. ¼ S5 BT.

A juniper, 15 ins. diam., bears N. 45°34' W., 137 lks. dist., mkd. ¼ S32 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 15 ins. in the ground to bedrock, and in a mound of stone, 2 ft. base to top, with brass cap mkd.

T3N R25E
 ¼ S32
 S5
 T2N
 1963

Deposit the original stone alongside the iron post.

N. 88°45' E., beginning new measurement.

Asc. 70 ft. over broken and rolling SW. slope.

4.10 Draw, drains S.

11.40 Spur, projects S.; desc. 45 ft. over a SE. slope.

16.70 Head of draw, drains S.; asc. 50 ft. over SW. slope.

29.00 Enter dense juniper.

CHAINS

31.90 W. rim of Willow Creek Canyon, bears N. 30° E., and S. 30° W.; desc. 290 ft. over steep SE. slope.

40.15 The cor. of secs. 4, 5, 32 and 33, monumented with a sandstone, 24x6x3 ins., firmly set and mkd. as described in the official record.

From which the original bearing trees:

- A juniper, 16 ins. diam., bears N. 13° E., 21 lks. dist., mkd. T3N R25E S33 BT.
- A juniper, 14 ins. diam., bears S. 38°30' E., 14 lks. dist., mkd. T2N R25E S4 BT.
- A juniper, 10 ins. diam., bears S. 17°45' W., 16 lks. dist., mkd. T2N R25E S5 BT.
- A juniper, 12 ins. diam., bears N. 84°15' W., 10 lks. dist., mkd. T3N R25E S32 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T3N R25E
S32 | S33
 S5 | S4
 T2N
 1963

Deposit the original stone alongside the iron post.

Land, mountainous.
 Soil, rocky clay.
 Timber, dense juniper on East 10.00 chs.
 Undergrowth, grass and sagebrush.

S. 89°56' E., bet. secs. 4 and 33.

Desc. 440 ft. over steep SE. slope.

29.00 Mouth of Bender Draw, drains S.

39.00 Willow Creek, 10 lks. wide, 6 ins. deep, course S. 60° W.; asc. 20 ft. over NW. slope.

40.23 Point for the ¼ sec. cor. of secs. 4 and 33. at proportionate dist.; there is no remaining evidence of the original cor.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., on solid rock and in a mound of stone, 6 ft. base to top, with brass cap mkd.

T3N R25E
 ¼ S33
 S4
 T2N
 1963

Asc. 800 ft. over steep NW. slope.

76.40 E. rim of Willow Creek Canyon, bears NE. and SW.; enter dense mahogany and juniper; asc. 200 ft. over broken plateau with NE. drainage.

Dependent Resurvey of the West Boundary of T. 2 N., R. 24 E.

**Reestablishment of the Survey Executed
by A. Jenson in 1898 and the
Retracement by S. P. and J. R. Stewart in 1906.**

From the cor. of Tps. 1 and 2 N., Rs. 23 and 24 E.,
previously described.

N. 0°16' W., along the W. bdy. of sec. 11.

Acc. 140 ft. over rocky and ledgy E. slope through
scattering juniper.

- 3.29 Barbed wire fence, bears N. 70° W. and S. 70° E.
28.70 Rocky spur, projects E.; desc. 130 ft. over NE slope
29.50 Ledge, 15 ft. high, bears SW. and SE.; enter dense aspen
grove.
36.10 Leave aspen.
39.64 Point for the E. & W. cor. of sec. 16, T. 2 N., R. 24
E., at mid-point bet. the Tp. cor. and the closing cor.
of sec. 23 and 24.
- Set an iron post, 30 lbs. long, 2 1/2 in. diam., 6 in.
in the ground to bedrock, and in a mound of stone, 3
ft. base to top, with brass cap and.

T2E
R21E
1
1961

- 40.24 The W. & sec. cor. of sec. 11, monumented with a
quartzite stone, 200 lbs. (one) firmly set, and
witnessed as described in the official record.

At the cor. point

Set an iron post, 30 lbs. long, 2 1/2 in. diam., 12 in.
in the ground, with brass cap and.

T2E
R21E R24E
1
1961

Deposit the original stone alongside the iron post, and
raise a mound of stone, 3 ft. base, 2 1/2 ft. high, E. of cor.

S. 0°16' E., beginning new measurement.

Desc. 15 ft. over rocky SE. slope through heavy sage-
brush.

- 5.80 Road in bottom of Jackson Draw, unimproved, bears NW.
and SE.; asc. 25 ft. over SW. slope.
6.20 Enter scattering juniper and piñon.
11.10 Spur, projects W.; desc. 50 ft. over broken W. slope.
22.70 Begin sec. over rocky and ledgy SW. slope.
25.50 Top of ledge, 30 ft. high, bears NW. and SE.

CHAINS

From which the original bearing trees:

An aspen, 18 ins. diam., bears N. 52°45' E.,
33 lks. dist., mkd. T3N R25E S35 BT.
An aspen, 14 ins. diam., bears N. 67°30' W.,
53 lks. dist., mkd. T3N R25E S34 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T3N R25E
S34|S35
S3|S2
T2N
1963

Deposit the original stone alongside the iron post.

Land, broken plateau with NW. drainage.
Soil, rocky clay.
Timber, scattered juniper, mahogany and aspen.
Undergrowth, scattered grass and sagebrush.

S. 89°57' E., bet. secs. 2 and 35.

Asc. 140 ft. over broken plateau, through medium mahogany,
pinon, juniper and aspen; drainage is NW.

40.22

The ¼ sec. cor. of secs. 2 and 35, monumented with a
sandstone, 20x12x4 ins., firmly set and mkd. as des-
cribed in the official record.

From which the original bearing trees:

A pinon, 10 ins. diam., bears S. 11°30' E.,
65 lks. dist., mkd. T2N R25E S2 BT.
A pinon, 12 ins. diam., bears N. 45°30' W.,
44 lks. dist., mkd. T3N R25E S35 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins
in the ground, with brass cap mkd.

T3N R25E
¼ S35
S2
T2N
1963

Deposit the original stone alongside the iron post and
raise a mound of stone, 3 ft. base, 2½ ft. high, N. of
cor.

East, beginning new measurement.

Asc. 60 ft. over broken plateau, through scattered
juniper, aspen and pinon; drainage is NW.

7.40

Unimproved dirt road, bears NW. and SE.

40.76

The closing cor. of Tps. 2 and 3 N., R. 25 E. on the
Utah-Colorado State Line, monumented with a sandstone,
26x13x4 ins., firmly set and mkd. as described in the
official record.

Dependent Resurvey of the South Boundary of T. 3 N., R. 25 E.

GRADES

From which the original bearing trees:

- A mahogany, 8 ins. diam., bears S. 76° W., 23 lks. dist., mkd T2N R25E S2 CC BT.
- A pine, 16 ins. diam., bears N. 0°30' W., 108 lks. dist., mkd. T3N R25E S35 CC BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T3N	C
R25E	O
	L
S35	O
CC	R
S2	A
T2N	D
	O
1963	

Deposit the original stone alongside the iron post and raise a mound of stone, 3 ft. base, 2½ ft. high, W. of cor.

From this cor., the 273 Mile Cor. on the Utah-Colorado State Line, bears N. 0°02' W., 2.85 chs. dist., and is monumented with an iron post, 2½ ins. diam., set, mkd. and witnessed as described in the 1963 retracement of the Utah-Colorado State Line.

Land, broken plateau with NW. drainage.
 Soil, rocky clay.
 Timber, pine, aspen and juniper.
 Undergrowth, grass and sagebrush.

Dependent Resurvey of the Subdivisional Lines
 of
 Township 3 North, Range 25 East

Reestablishment of the Survey Executed
 by A. Jessen in 1898.

From the cor. of secs. 5, 6, 31 and 32, on the S. bdy. of the Tp., previously described.

N. 0°02' E., bet. secs. 31 and 32.

Desc. 250 ft over broken NE. slope, through medium juniper

17.90 Wash, 40 lks. wide, 7 ft deep, drains NW.; leave timber; asc. 40 ft. over SW. slope.

22.50 Spur, projects NW.; desc. 175 ft. over NE. slope.

30.50 Dirt trail road, bears NW. and SE.

31.00 Bottom of draw, drains NW.; asc. SW. slope of spur.

40.06 The ¼ sec. cor. of secs. 31 and 32, monumented with a quartzite stone, 14x8x5 ins., firmly set and mkd. as described in the official record

Set an iron post, 30 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.

CHAINS	STANDARD
	<p style="text-align: center;">T3N R25E $\frac{1}{4}$ S31 S32 1963</p> <p>Deposit the original stone alongside the iron post and raise a mound of stone, 2 ft. base, 2½ ft. high. W. of cor.</p> <p>The cor. falls on top of a spur, projecting NW.</p> <p style="text-align: center;">_____</p> <p>N. 0°10' E., beginning new measurement.</p> <p>Desc. 220 ft. to base of ridge, through medium sagebrush.</p> <p>17.80 Base of ridge, bears NE. and SW.; thence desc. 60 ft. over gentle NW. slope.</p> <p>32.40 Wash, 20 lks. wide, 3 ft. deep, drains W.; asc. 50 ft. over SW. slope.</p> <p>40.47 The cor. of secs. 29, 30, 31 and 32, monumented with a sandstone, 12x7x3 ins., firmly set and mkd. as described in the official record.</p> <p>At the cor. point</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T3N R25E S30 S29 S31 S32 1963</p> <p>Deposit the original stone alongside the iron post and place a collar of stone, 2 ft. base to top.</p> <p>Land, mountainous South ½ mile; gently rolling North ½ mile. Soil, rocky clay. Timber, medium juniper South 3.00 chs.; none remainder of mile. Undergrowth, sagebrush and grass.</p> <hr/> <p>From the cor. of secs. 25, 30, 31 and 36, on the W. bdy. of the Tp., monumented with a 2½ in. iron post; set, mkd. and witnessed as described in the official record of the 1962 resurvey of T. 3 N., R. 24 E.</p> <p>S. 89°47' E., bet. secs. 30 and 31.</p> <p>Asc. 120 ft. over broken and rolling land.</p> <p>2.10 Wash, 30 lks. wide, 10 ft. deep, drains SW.</p> <p>15.40 Wash, 10 lks. wide, 4 ft. deep, drains NW.</p> <p>28.30 Unimproved dirt road, bears NE. and SW.</p> <p>35.10 Unimproved dirt road, bears N. and S.</p> <p>37.78 The ¼ sec. cor. of secs. 30 and 31, monumented with a quartzite stone, 12x6x6 ins., firmly set, mkd. and witnessed as described in the official record.</p> <p>At the cor. point</p>

Dependent Resurvey of the Subdivisional Lines of T. 3 N., R. 25 E.

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T3N R25E

¼ S30
S31

1963

Deposit the original stone alongside the iron post.

S. 89°38' E., beginning new measurement.

Asc. 125 ft. over broken land.

13.80 Unimproved dirt road, bears NE. and SW.

18.50 Wash, 20 lks. wide, 7 ft. deep, drains NW.

27.80 Unimproved dirt road, bears N. and S.

39.00 Wash, 10 lks. wide, 4 ft. deep, drains SW.

40.48 The cor. of secs. 29, 30, 31 and 32, previously described.

Land, broken and rolling.

Soil, rocky clay.

Timber, none.

Undergrowth, grass and sagebrush.

N. 2°40' E., bet. secs. 29 and 30.

Asc. 30 ft. over broken SW. slope.

3.60 Unimproved dirt road, bears NW. and SE.

14.50 Rim of small canyon, bears E. and W.; desc. 110 ft. over N. slope.

20.10 Improved dirt road, bears E. and W.

21.40 Bottom of canyon; wash, 75 lks. wide, 5 ft. deep, drains W.; asc. 120 ft. over ledgy S. slope; enter scattered juniper.

25.60 N. rim of canyon, bears E. and W.; asc. 30 ft. over S. slope.

29.00 Low ridge, bears NE. and W.; desc. 40 ft. over gentle N. slope to cor.; leave juniper.

39.52 The ¼ sec. cor. of secs. 29 and 30, monumented with a limestone, 17x7x5 ins., firmly set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T3N R25E

¼ S30 | S29

1963

Deposit the original stone alongside the iron post.

Dependent Resurvey of the Subdivisional Lines of T. 3 N., R. 25

CHAINS

N. 0°15' E., beginning new measurement.

Asc. 30 ft. over gentle W. slope.

24.00 Top of asc.; desc. 100 ft. over NW. slope.

31.90 Spring branch in bottom of draw, 2 lks. wide, 1 in. deep, course SW.; asc. S. slope; enter medium dense juniper.

40.23 The cor. of secs. 19, 20, 29 and 30, monumented with a limestone, 14x8x5 ins., firmly set and mkd. as described in the official record.

From which the original bearing trees:

A juniper, 7 ins. diam., bears S. 72° E., 24 lks. dist., mkd. T3N R25E S29 BT.

A juniper, 12 ins. diam., bears S. 29°30' W., 95 lks. dist., mkd. T3N R25E S30 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T3N	R25E
<u>S19</u>	<u>S20</u>
S30	S29
1963	

Deposit the original stone alongside the iron post.

Land, rolling and broken.
Soil, rocky clay.
Timber, scattered juniper.
Undergrowth, grass and sagebrush.

From the cor. of secs. 19, 24, 25 and 30, on the W. bdy. of the Tp., monumented with a 2½ in. iron post, set, mkd. and witnessed as described in the official record of the 1962 resurvey of T. 3 N., R. 24 E.

S. 88°49' E., bet. secs. 19 and 30.

Desc. 30 ft. over E. slope, through scattered juniper and pinon.

6.30 Small ravine, drains S.; asc. 140 ft. over broken W. slope.

11.80 Wash, 20 lks. wide, 3 ft. deep, drains SW.

25.10 Top of spur, projects S.; desc. 150 ft. over broken E. slope.

32.70 Wash, 20 lks. wide, 2 ft. deep, drains NE., irregularly.

37.80 Wash, 10 lks. wide, 2 ft. deep, drains NE.

38.88 The ¼ sec. cor. of secs. 19 and 30, monumented with a sandstone, 16x12x4 ins., firmly set, mkd. and witnessed as described in the official record.

From which the original bearing tree:

A juniper, 14 ins. diam., bears S. 5°30' W., 67 lks. dist., mkd. ¼ S30 BT.

Dependent Resurvey of the Subdivisional Lines of T. 3 N., R. 25 E.

CHAINS

There is no remaining evidence of the other bearing tree.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T3N R25E

$\frac{1}{4}$ S19

S30

1963

Deposit the original stone alongside the iron post and raise a mound of stone, 3 ft. base, $2\frac{1}{2}$ ft. high, N. of cor.

S. $89^{\circ}20'$ E., beginning new measurement.

Desc. 35 ft. over E. slope, through scattered juniper.

- 4.00 Draw, drains SE.; asc. 40 ft. over W. slope.
- 7.10 Small spur, projects S.; desc. 20 ft. over E. slope.
- 11.30 Small draw, drains S.; asc. 65 ft. over W. slope.
- 14.80 Low ridge, bears N. and S.; desc. 185 ft. over broken E. slope.
- 30.30 Basin Creek, 3 lks. wide, 2 ins. deep, course S.; asc. 145 ft. over W. slope.
- 41.03 The cor. of secs. 19, 20, 29 and 30, previously described.
- Land, broken and rolling.
Soil, rocky clay.
Timber, scattered juniper and pinon.
Undergrowth, sagebrush and grass.

N. $0^{\circ}34'$ E., bet. secs. 19 and 20.

Asc. 20 ft. over SE. slope through scattered juniper.

- 2.00 Spur, projects SW.; desc. 80 ft. over NW. slope.
- 11.20 Trail road in bottom of draw; draw drains SW.; asc. 60 ft. over SE. slope.
- 15.20 Spur, projects SW.; trail road, bears NE. and SW.; desc. 150 ft. over NW. slope.
- 19.50 Bottom of desc.; thence along bottom of small canyon.
- 25.30 Basin Creek, 3 lks. wide, 2 ins. deep, course SW.; Basin Creek is in a large wash, 1.00 chs. wide, 20 ft. deep; continue along bottom of canyon.
- 31.40 Leave canyon bottom; asc. 110 ft. over SE. slope.
- 35.40 Trail road, bears NE. and SW.
- 39.84 The $\frac{1}{4}$ sec. cor. of secs. 19 and 20, monumented with a limestone, 14x10x8 ins., firmly set, mkd. and witnessed as described in the official record.

From which the original bearing tree:

Dependent Resurvey of the Subdivisional Lines of T. 3 N., R. 2

CHAINS

A juniper, 8 ins. diam., bears S. 70°30' E.,
32 lks. dist., mkd. ¼ S20 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 16 ins.
in the ground, and in a mound of stone, 3 ft. base to
top, with brass cap mkd.

T3N R25E
¼
S19|S20
1963

Deposit the original stone alongside the iron post.

N. 0°36' E., beginning new measurement.

Asc. 250 ft. over broken SE. slope through medium dense
juniper.

6.30 Wash, 4 lks. wide, 1 ft. deep, drains SW.

19.30 Dozed road, bears E. and W., irregularly.

40.39 The cor. of secs. 17, 18, 19 and 20, monumented with a
sandstone, 18x10x5 ins., firmly set and mkd. as described
in the official record.

From which the original bearing trees:

- A juniper, 8 ins. diam., bears N. 29°15' E.,
10 lks. dist., mkd. T3N R25E S17 BT.
- A juniper, 8 ins. diam., bears S. 22°30' E.,
53 lks. dist., mkd. T3N R25E S20 BT.
- A juniper, 10 ins. diam., bears S. 29°15' W.,
44 lks. dist., mkd. T3N R25E S19 BT.
- A juniper, 12 ins. diam., bears N. 53° W.,
33 lks. dist., mkd. T3N R25E S18 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 16 ins.
in the ground, and in a mound of stone, 3 ft. base to
top, with brass cap mkd.

T3N R25E
S18|S17
S19|S20
1963

Deposit the original stone alongside the iron post.

Land, rolling and broken.
Soil, rocky clay.
Timber, medium dense juniper.
Undergrowth, heavy sagebrush.

From the cor. of secs. 13, 18, 19 and 24 on the W. bdy.
of the Tp., monumented with a 2½ in. iron post, set,
mkd. and witnessed as described in the field notes of
the 1963 resurvey of T. 3 N., R. 24 E.

S. 89°56' E., bet. secs. 18 and 19.

Asc. 100 ft. over broken SW. slope through scattered
juniper.

Dependent Resurvey of the Subdivisional Lines of T. 3 N., R. 25 E.

CHAINS

- 21.20 Dirt trail road, bears NW. and SE.
- 39.32 The $\frac{1}{2}$ sec. cor. of secs. 18 and 19, monumented with a sandstone, 12x9x8 ins., firmly set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 12 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T3N R25E

$\frac{1}{2}$ $\frac{S18}{S19}$
1963

Deposit the original stone alongside the iron post.

S. 88°03' E., beginning new measurement.

Asc. 30 ft. over gently rolling and broken SW. slope, through scattered juniper.

- 8.50 Wash, 40 lks. wide, 15 ft. deep, drains SE.
- 39.30 Spur, projects S.; desc. 40 ft. over SE. slope.
- 41.30 The cor. of secs. 17, 18, 19 and 20, previously described.
- Land, broken and rolling.
Soil, rocky clay.
Timber, scattered juniper.
Undergrowth, medium sagebrush and grass.
- N. 0°03' E., bet. secs. 17 and 18.
- Asc. 480 ft. over SE. slope, changing to S. slope, through medium dense juniper.
- 29.40 Ridge, bears NW. and SE.; desc. 110 ft. over NE. slope; leave timber.
- 40.28 The $\frac{1}{2}$ sec. cor. of secs. 17 and 18, monumented with a sandstone, 10x8x7 ins., firmly set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 12 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T3N R25E

$\frac{1}{2}$
S18|S17
1963

Deposit the original stone alongside the iron post.

N. 0°29' E., beginning new measurement.

Desc. 50 ft. over NE. slope.

- 6.20 Ravine, 75 lks. wide, 15 ft. deep, drains E.; asc. 150 ft. over S. slope.

Dependent Resurvey of the Subdivisional Lines of T. 3 N., R. 25

CHAINS
13.60

Spur, projects E.; desc. 20 ft. over N. slope.

22.34

The original closing cor. of secs. 17 and 18, monumented with a sandstone, 12x8x6 ins., firmly set, mkd. and witnessed as described in the official record.

Destroy the original markings and remark the stone with "AM".

22.90

Intersect the Utah-Wyoming State Line.

Point for the closing cor. of secs. 17 and 18.

Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground, and in a mound of stone, 5 ft. base to top, with brass cap mkd.

WYOMING

S18 | S17

C C

T3N R25E

1963

From this cor. the 267 Mile Cor. on the Utah-Wyoming State Line, bears S. 89°52' W., 46.50 chs. dist., and is monumented with an iron post, 2½ ins. diam., firmly set, mkd. and witnessed as described in the field notes of the retracement of the Utah-Wyoming State Line, this group.

Land, mountainous.

Soil, rocky clay.

Timber, juniper on the South 28.00 chs., no timber the balance.

Undergrowth, sagebrush and grass.

From the cor. of secs. 4, 5, 32 and 33, on the S. bdy. of the Tp., previously described.

N. 0°04' W., bet. secs. 32 and 33.

Asc. 590 ft. over SE. slope, through dense juniper and pinon.

13.00

Leave timber.

18.30

Ridge, bears E. and W.; desc. 140 ft. over NE. slope.

39.68

The ¼ sec. cor. of secs. 32 and 33, monumented with a quartzite stone, 18x11x3 ins., firmly set and mkd. as described in the official record.

There is no remaining evidence of the bearing tree.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T3N R25E

¼

S32 | S33

1963

Deposit the original stone alongside the iron post.

N. 0°04' E., beginning new measurement.

Dependent Resurvey of the Subdivisional Lines of T. 3 N., R. 25 E.

CHAINS

- Asc. 120 ft. over SE. slope.
- 17.90 Spur, projects SE.; desc. 50 ft. over N. slope.
- 33.30 Gulch, drains W.; asc. 20 ft. over S. slope.
- 36.30 Ridge, bears NE. and SW.; desc. 70 ft. over NW. slope.
- 40.28 The cor. of secs. 28, 29, 32 and 33, monumented with a quartzite stone, 14x6x6 ins., firmly set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T3N R25E
S29 | S28
S32 | S33
 1963

Deposit the original stone alongside the iron post.

Land, mountainous.
 Soil, rocky clay.
 Timber, juniper on South 13.00 chs.
 Undergrowth, sagebrush and grass.

- From the cor. of secs. 29, 30, 31 and 32.
- N. 89°59' E., bet. secs. 29 and 32.
- Asc. 480 ft. over broken and rolling W. slope of ridge.
- 1.60 Unimproved dirt road, bears N. and S., irregularly.
- 15.50 Spur, projects SW.; thence asc. over SE. slope.
- 24.90 Gulch, drains SW.; thence asc. over W. slope.
- 38.00 Spur, projects NW.; desc. 20 ft. over NE. slope.
- 40.38 The ¼ sec. cor. of secs. 29 and 32, monumented with a sandstone, 14x10x5 ins., firmly set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T3N R25E
 ¼ S29
 ¼ S32
 1963

Deposit the original stone alongside the iron post.

East, beginning new measurement.

Desc. gradually over NE. slope.

- 9.90 Gulch, drains NW.; asc. 300 ft. over SW. slope.
- 18.90 Spur, projects NW.; asc. 270 ft. over NW. slope.

Dependent Resurvey of the Subdivisional Lines of T. 3 N., R. 25 E.

CHAINS

- 30.30 Trail road, bears NE. and SW.
- 40.02 The cor. of secs. 28, 29, 32 and 33.
Land, mountainous.
Soil, rocky clay.
Timber, none.
Undergrowth, sagebrush and grass.
-
- N. 1°20' E., bet. secs. 28 and 29.
Desc. 30 ft. over W. slope.
- .20 Trail road, bears E. and W.
- 10.60 Spur, projects W.; desc. 135 ft. over W. slope, changing to NW. slope.
- 23.30 Spur, projects NW.; desc. 360 ft. over NE. slope.
- 39.30 Gulch, drains NW.; asc. 10 ft. over SW. slope.
- 39.75 Point for the $\frac{1}{4}$ sec. cor. of secs. 28 and 29 at proportionate dist.; there is no remaining evidence of the original cor.
Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins. in the ground, and in a mound of stone, 4 ft. base to top, with brass cap mkd.
T3N R25E
 $\frac{1}{4}$
S29 | S28
1963
Thence asc. 170 ft. over broken SW. slope, changing to S. slope.
- 49.90 Gulch, drains W.; enter scattered juniper and pinon.
- 70.14 Trail road, bears E. and W.; leave timber; top of spur, projects W.; desc. 75 ft. over N. slope.
- 79.50 The cor. of secs. 20, 21, 28 and 29; monumented with a limestone, 10x8x6 ins., firmly set, mkd. and witnessed as described in the official record.
At the cor. point
Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 16 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.
T3N R25E
S20 | S21
S29 | S28
1963
Deposit the original stone alongside the iron post.
Land, mountainous.
Soil, rocky clay.
Timber, scattered juniper and pinon.
Undergrowth, sagebrush and grass.
-
- From the cor. of secs. 19, 20, 29 and 30.
S. 89°42' E., bet. secs. 20 and 29.

Dependent Resurvey of the Subdivisional Lines of T. 3 N., R. 25 E.

CHAINS

- Asc. 130 ft. over broken and rolling land through scattered juniper.
- 10.70 Leave timber.
- 16.70 Wash, 20 lks. wide, 4 ft. deep, drains W., irregularly.
- 21.70 Graded road, bears N. and S.
- 36.70 Same wash, 2.00 chs. wide, 12 ft. deep, drains NW., irregularly.
- 40.16 The $\frac{1}{4}$ sec. cor. of secs. 20 and 29, monumented with a sandstone, 18x10x3 ins., firmly set, mkd. and witnessed as described in the official record.
- At the cor. point
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.
- T3N R25E
 $\frac{1}{4}$ $\frac{S20}{S29}$
1963
- Deposit the original stone alongside the iron post.
-
- S. 89°51' E., beginning new measurement.
- Asc. 300 ft. over broken and rolling land.
- 22.60 Same wash as in W. $\frac{1}{2}$ mile, 40 lks. wide, 5 ft. deep, drains SW, irregularly.
- 33.90 Wash, 70 lks. wide, 5 ft deep, drains NW.
- 40.05 The cor. of secs. 20, 21, 28 and 29.
- Land, rolling and broken.
Soil, rocky clay.
Timber, juniper on West 10.00 chs.
Undergrowth, sagebrush and grass.
-
- N. 0°02' W., bet. secs. 20 and 21.
- Desc. gradually through bottom of hollow.
- 3.50 Small wash, drains SW.; asc. 90 ft. over SE. slope.
- 8.70 Spur, projects SW.; asc. 140 ft. over broken W. slope.
- 22.70 Wash, 40 lks. wide, 6 ft. deep, drains SW.
- 33.80 Draw, drains SW.
- 35.00 Spur, projects SW.
- 39.20 Unimproved dirt road, bears NW. and SE.
- 40.05 The $\frac{1}{4}$ sec. cor. of secs. 20 and 21, monumented with a limestone, 15x8x5 ins., firmly set, mkd. and witnessed as described in the official record.
- At the cor. point

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T3N R25E
 ¼
 S20|S21
 1963

Deposit the original stone alongside the iron post.

N. 0°52' E., beginning new measurement.

Asc. 50 ft. over S. slope.

- 4.50 Spur, projects W.; desc. 10 ft. over N. slope.
- 12.00 Wash, 16 lks. wide, 5 ft. deep, drains W.; asc. 50 ft. over S. slope.
- 16.80 Spur, projects W ; desc. 35 ft. over N. slope.
- 28.10 Draw, drains W.; asc. over S. slope.
- 36.10 Spur, projects W.; desc. 45 ft. over N. slope.
- 40.05 The cor. of secs. 16, 17, 20 and 21, monumented with a limestone, 12x6x4 ins., firmly set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T3N R25E
 S17|S16
 S20|S21
 1963

Deposit the original stone alongside the iron post.

Land, rolling and broken.
 Soil, rocky clay.
 Timber, none.
 Undergrowth, sagebrush and grass.

From the cor. of secs. 17, 18, 19 and 20.

S. 89°34' E., bet. secs. 17 and 20.

Over broken SE. slope through medium dense juniper and pinon; desc. 10 ft.

- 2.00 Small wash, drains SE.; asc. 35 ft.
- 11.00 Spur, projects SE ; desc. 110 ft.; continue over broken SE. slope.
- 13 80 Leave timber.
- 14.90 Wash, 16 lks. wide, 8 ft. deep, drains SE.
- 27.90 Basin Creek, 2 lks. wide, 2 ins. deep, course S. 15° W.; creek is in the bottom of a large wash, 40 lks. wide, 15 ft. deep.

Dependent Resurvey of the Subdivisional Lines of T. 3 N., R. 25 E.

CHAINS

Asc. 190 ft. over W. slope.

28.90 Improved dirt road, bears N. 15° E. and S. 15° W.

39.90 The $\frac{1}{4}$ sec. cor. of secs. 17 and 20, monumented with a limestone, 10x10x5 ins., firmly set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 10 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T3N R25E

$\frac{1}{4}$ S17

S20

1963

Deposit the original stone alongside the iron post.

S. 89°38' E., beginning new measurement.

Asc. 340 ft. over low plateau, sloping W.

40.26 The cor. of secs. 16, 17, 20 and 21.

Land, broken and rolling West $\frac{1}{2}$ mile; low plateau East $\frac{1}{2}$ mile.

Soil, rocky clay.

Timber, medium dense juniper and pinon, West 14.00 chs.; no timber the balance.

Undergrowth, sagebrush and grass.

N. 0°15' E., bet. secs. 16 and 17.

Along rolling and broken W. slope of main ridge; asc. 15 ft. over S. slope.

3.40 Spur, projects W.; desc. 80 ft. over N. slope.

7.80 Wash, 12 lks. wide, 6 ft. deep, drains NW

8.90 Enter dense grove of choke cherry trees.

11.30 Leave trees.

12.60 Wash, 30 lks. wide, 10 ft. deep, drains SW.; asc. 260 ft. over broken S. slope.

26.10 Draw, drains SW.

31.60 Spur, projects W.; desc. 130 ft. over NW. slope.

40.01 The $\frac{1}{4}$ sec. cor. of secs. 16 and 17, monumented with a limestone, 12x10x6 ins., firmly set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 6 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

Dependent Resurvey of the Subdivisional Lines of T. 3 N., R. 25 E.

CHAINS

T3N R25E

 $\frac{1}{2}$

S17|S16

1963

Deposit the original stone alongside the iron post.

N. 0°09' E., beginning new measurement.

Continue over broken W. slope of main ridge; desc. 90 ft. over NW. slope.

6.70 Wash, 80 lks. wide, 30 ft. deep, drains NW.; asc. 150 ft. over SE. slope, changing to S. slope.

10.10 Wash, 40 lks. wide, 15 ft. deep, drains SW.

14.10 Spur, projects SW.

23.07 The original closing cor. of secs. 16 and 17, monumented with a limestone, 18x10x6 ins., firmly set, mkd. and witnessed as described in the official record.

Destroy the original markings and remark the stone "AM".

23.32 Intersect the Utah-Wyoming State Line.

Point for the closing cor. of secs. 16 and 17.

Set an iron post, 30 ins. long, 2½ ins. diam., 15 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

WYOMING

S17|S16

C C

T3N R25E

1963

From this cor., the 265 Mile Cor., on the Utah-Wyoming State Line, bears S. 89°13' E., 26.47 chs. dist., and is monumented with a 2½ in. iron post, firmly set, mkd. and witnessed as described in the field notes of the retracement of the Utah-Wyoming State Line, this group.

Land, rolling and broken.

Soil, rocky clay.

Timber, none.

Undergrowth, sagebrush, grass, and small amount of choke cherry in bottoms of larger draws.

From the cor. of secs. 3, 4, 33 and 34, on the S. bdy. of the Tp.

N. 0°53' E., bet. secs. 33 and 34.

Desc. 780 ft over broken NW. slope of Willow Creek Canyon.

37.50 Willow Creek, 6 lks. wide, 4 ins. deep, course SW.; asc. 80 ft over broken SE. slope.

39.85 The ½ sec. cor. of secs. 33 and 34, monumented with a sandstone, 18x10x6 ins., firmly set, mkd. and witnessed as described in the official record.

At the cor. point

Dependent Resurvey of the Subdivisional Lines of T. 3 N., R 25 E.

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 2 ins. in the ground, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T3N R25E

½
S33 | S34
1963

Deposit the original stone alongside the iron post.

N. 0°21' E., beginning new measurement.

Asc. 190 ft. over ledgy SE. slope.

8.80 N. rim of Willow Creek Canyon, bears NE. and SW.; desc. 30 ft. over NE. slope.

20.30 Gully, drains E.; trail road in bottom of gully, bears E. and W.; asc. 250 ft. over broken E. slope.

40.16 The cor. of secs. 27, 28, 33 and 34, monumented with a sandstone, 12x6x4 ins., firmly set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T3N R25E

S28 | S27
S33 | S34
1963

Deposit the original stone alongside the iron post.

Land, mountainous.

Soil, rocky clay.

Timber, scattered mahogany on South ½ mile.

Undergrowth, sagebrush and willows along bottom of creek.

From the cor. of secs. 28, 29, 32 and 33.

S. 89°45' E., bet. secs. 28 and 33.

Asc. 25 ft. over NW. slope.

4.00 Ridge, bears NE. and SW.; desc. 310 ft. over broken SE. slope.

17.30 Trail road, bears NE. and SW.

40.22 The ½ sec. cor. of secs. 28 and 33, monumented with a sandstone, 17x9x3 ins., firmly set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 2 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T3N R25E

½ S28
S33
1963

Dependent Resurvey of the Subdivisional Lines of T. 3 N., R. 25 E.

CHAINS	
	Deposit the original stone alongside the iron post. <hr/>
	S. 89°52' E., beginning new measurement.
	Asc. 25 ft. over SW. slope.
3.10	Spur, projects SE.; desc. 60 ft. over NE. slope.
10.20	Spring branch, course SE.; asc. 320 ft. over broken W. slope.
11.00	Unimproved dirt road, bears N. and S.
21.10	Spur, projects S.
27.90	Gulch, drains SW.
33.50	Ridge, bears N. and S.; desc. 100 ft. over broken SE. slope.
41.10	The cor. of secs. 27, 28, 33 and 34. Land, mountainous. Soil, rocky clay. Timber, none. Undergrowth, sagebrush and grass.
	N. 0°27' E., bet. secs. 27 and 28. Asc. 380 ft. over broken SE. slope.
20.40	Rocky spur, projects N. 70° E.; enter aspen grove; desc. 280 ft. over N. slope, changing to NE. slope.
23.30	Leave aspen.
27.60	Trail road, bears E. and W.
40.39	The $\frac{1}{2}$ sec. cor. of secs. 27 and 28, monumented with a limestone, 14x12x6 ins., firmly set, mkd. and witnessed as described in the official record. At the cor. point Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 20 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd. T3N R25E $\frac{1}{2}$ S28 S27 1963
	Deposit the original stone alongside the iron post. <hr/>
	N. 0°52' E., beginning new measurement.
	Desc. 30 ft. over NE. slope.
3.30	Unimproved dirt road, bears E. and W.
4.50	Enter aspen grove.
6.00	Spring branch, course E.; asc. 700 ft. over steep SW. slope.
7.30	Leave aspen.

Dependent Resurvey of the Subdivisional Lines of T. 3 N., R. 25 E.

CHAINS

- 28.30 Gully, drains SE
- 37.70 Spur, projects SE.; continue asc. over NE. slope.
- 39.74 The cor. of secs. 21, 22, 27 and 28, monumented with a limestone, 12x8x6 ins., firmly set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 15 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T3N R25E
S21 | S22
S28 | S27
 1963

Deposit the original stone alongside the iron post.

Land, mountainous.
 Soil, rocky clay.
 Timber, scattered patches of aspen.
 Undergrowth, sagebrush and grass.

From the cor. of secs. 20, 21, 28 and 29.

N. 89°44' E., bet. secs. 21 and 28.

Asc. 850 ft. over steep SW. slope.

- 17.80 Dozed road, bears N. and S.
- 37.50 Spur, projects SE.; desc. 50 ft. over E. slope.
- 40.06 Point for the ¼ sec. cor. of secs. 21 and 28 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 16 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T3N R25E
 ¼ S21
S28
 1963

Desc. 60 ft. over E. slope.

- 42.70 Draw, drains SE.; asc. 325 ft. over W. slope.
- 43.60 Trail road, bears N. and S.
- 50.80 Wash, 40 lks. wide, 3 ft. deep, drains SW.
- 58.40 Ridge, bears N. and S.; desc. 120 ft. over E. slope.
- 66.40 Draw, drains S.; asc. 190 ft. over W. slope.
- 75.30 Spur, projects S.; desc. 80 ft. over E. slope.
- 80.12 The cor. of secs. 21, 22, 27 and 28.

Land, mountainous.
 Soil, rocky clay.
 Timber, none.
 Undergrowth, sagebrush and grass.

Dependent Resurvey of the Subdivisional Lines of T. 3 N., R. 25 E.

CHAINS

N. 0°18' E., bet. secs. 21 and 22.

Asc. 75 ft. over rocky E slope, changing to SE. slope.

11.20 Spur, projects E. approx. 5.00 chs., then S.; thence over broken and rolling E. slope of main ridge.

Desc. 80 ft.

24.40 Spur, projects E.

29.60 Draw, drains E.; asc. 40 ft. over S. slope.

37.50 Spur, projects E.; desc. 40 ft over N. slope.

39.67 The $\frac{1}{4}$ sec. cor. of secs. 21 and 22, monumented with a limestone, 14x8x6 ins., firmly set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 16 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T3N R25E

$\frac{1}{4}$

S21 | S22

1963

Deposit the original stone alongside the iron post.

N. 0°27' E., beginning new measurement.

Continue over broken and rolling E. slope of main ridge; desc. 170 ft.

10.60 Spur, projects E.

16.30 Draw, drains E.; asc. 50 ft. over S. slope.

20.60 Dozed road, bears E. and W., irregularly.

22.40 Spur, projects E.; desc. 120 ft. over N. slope.

29.50 Draw, drains E.; asc. 60 ft. over S. slope.

39.34 The cor. of secs. 15, 16, 21 and 22, monumented with a limestone, 14x12x2 ins., firmly set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 16 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T3N R25E

S16 | S15

S21 | S22

1963

Deposit the original stone alongside the iron post.

Land, mountainous.

Soil, rocky clay.

Timber, none.

Undergrowth, sagebrush and grass.

Dependent Resurvey of the Subdivisional Lines of T. 3 N., R. 25 E.

CREAINS

From the cor. of secs. 16, 17, 20 and 21.

S. 89°46' E., bet. secs. 16 and 21.

Asc. 630 ft. over broken and rolling W. slope.

12.60 Trail road, bears NE. and SW.

32.90 Wash, 20 lks. wide, 5 ft. deep, drains SW.

40.30 The $\frac{1}{2}$ sec. cor. of secs. 16 and 21, monumented with a limestone, 10x10x6 ins., firmly set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 6 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T3N R25E

$\frac{1}{2}$ S16

S21

1963

Deposit the original stone alongside the iron post.

S. 89°27' E., beginning new measurement.

Asc. 210 ft. over W. slope.

8.30 Spur, projects NW.

18.70 Ridge, bears N. and S.; desc. 350 ft. over broken and rolling E. slope of main ridge.

36.70 Spur, projects NE.

39.65 The cor. of secs. 15, 16, 21 and 22.

Land, mountainous.

Soil, rocky clay.

Timber, none.

Undergrowth, sagebrush and grass.

N. 0°21' E., bet. secs. 15 and 16.

Over broken and rolling E. slope of main ridge; desc. 115 ft. over N. slope of spur.

4.10 Draw, drains E.

31.90 Wash, 20 lks. wide, 4 ft. deep, in bottom of hollow at the head of Crumb Canyon, drains SE.

32.40 Unimproved dirt road, bears NW. and SE. along bottom of hollow; asc. 50 ft. over SW. slope, changing to W. slope.

40.29 The $\frac{1}{2}$ sec. cor. of secs. 15 and 16, monumented with a sandstone, 14x8x8 ins., firmly set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 18 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

Dependent Resurvey of the Subdivisional Lines of Township R. 25

CHAINS	ENTRANCE
22.84	<p style="text-align: center;">T3N R25E $\frac{1}{2}$ S16 S15 1963</p> <p>Deposit the original stone alongside the iron post.</p> <hr/> <p>N. 0°14' E., beginning new measurement.</p> <p>Asc. 40 ft. over W. slope.</p> <p>Intersect the Utah-Wyoming State Line.</p> <p>Point for the closing cor. of secs. 15 and 16.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.</p>
23.10	<p style="text-align: center;"><u>WYOMING</u> S16 S15 C C T3N R25E 1963</p> <p>From this cor., the 265 Mile Cor. on the Utah-Wyoming State Line, bears N. 89°37' W., 53.54 chs. dist., and is monumented with a 2½ in. iron post, firmly set, mkd. and witnessed as described in the field notes of the retracement of the Utah-Wyoming State Line, this group.</p> <p>The original closing cor. for secs. 15 and 16, monumented with a sandstone, 14x10x6 ins.; firmly set, mkd. and witnessed as described in the official record.</p> <p>Destroy the original markings and remark the stone "AM".</p> <p>Land, rolling and broken: Soil, rocky clay. Timber, none. Undergrowth, heavy sagebrush and grass.</p>
7.70	<p>From the cor. of secs. 2, 3, 34 and 35, on the S. bdy. of the Tp.</p> <p>N. 0°09' E, bet. secs. 34 and 35.</p> <p>Desc. 460 ft. over N. slope through medium dense pinon, juniper, mahogany and aspen.</p>
29.40	Trail road, bears E. and W.
29.40	Leave timber.
31.90	Bottom of canyon, drains W.; asc. 170 ft. over broken S. slope.
38.90	Spur, projects W ; desc. NW. slope.
39.42	<p>The ½ sec. cor. of secs. 34 and 35, monumented with a sandstone, 15x7x4 ins., firmly set, mkd. and witnessed as described in the official record.</p> <p>At the cor. point</p>
	<p>Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground, and in a mound of stone, 3 ft. base to top with brass cap mkd.</p>

Dependent Resurvey of the Subdivisional Lines of T. 3 N., R. 25 E.

CHAINS

T3N R25E

 $\frac{1}{2}$
 S34 | S35
 1963

Deposit the original stone alongside the iron post.

N. 0°04' E., beginning new measurement.

Desc. 200 ft. over broken NW. slope.

2.30 Enter dense aspen grove.

9.70 O-Wi-Yu-Kuts Creek, 2 lks. wide, 1 in. deep, course SW.; asc. 400 ft. over broken S. slope.

10.70 Leave dense aspen.

24.20 Ridge, bears E. and W.; desc. 100 ft. over NW. slope, through scattering pine and aspen.

39.64 The cor. of secs. 26, 27, 34 and 35, monumented with a sandstone, 20x8x4 ins., firmly set and mkd. as described in the official record.

There is no remaining evidence of the original bearing trees.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T3N R25E
 S27 | S26
 S34 | S35
 1963

Deposit the original stone alongside the iron post.

Land, mountainous.

Soil, rocky clay.

Timber, pine, mahogany, juniper and aspen.

Undergrowth, sagebrush and grass.

From the cor. of secs. 27, 28, 33 and 34.

S. 89°23' E., bet. secs. 27 and 34.

Desc. 420 ft. over broken SE. slope.

10.50 Spur, slopes S.

14.30 Wash, 10 lks. wide, 4 ft. deep, drains SE.

27.60 Willow Creek, 6 lks. wide, 3 ins. deep, course SW.; thence across bottom of Willow Creek Canyon.

30.36 Begin steep asc. over NW. slope.

39.99 Point for the ½ sec. cor. of secs. 27 and 34 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with a collar of stone, 3 ft. base to top, with brass cap mkd.

CHAINS

T3N R25E

¼ S27

S34

1963

- Asc. 590 ft. over broken NW. slope.
- 48.80 Enter dense aspen.
- 52.80 Spring branch, course NW.
- 61.40 Spring branch, course NW.
- 68.50 Leave aspen.
- 79.98 The cor. of secs. 26, 27, 34 and 35.
Land, mountainous.
Soil, rocky clay.
Timber, scattered to dense aspen.
Undergrowth, sagebrush and grass.

- S. 89°57' E., bet. secs. 26 and 35.
Asc. 40 ft. over NW. slope through scattering pine,
pinon and aspen.
- 4.00 Spur, projects N.; desc. 75 ft. over NE. slope.
- 13.40 Hollow, drains N.; asc. 20 ft. over NW. slope.
- 38.10 Ridge, bears NE. and SW.; thence asc. 30 ft. over SW.
slope.
- 40.32 The ¼ sec. cor. of secs. 26 and 35, monumented with a
sandstone, 20x6x4 ins., firmly set, mkd. and witnessed
as described in the official record.
At the cor. point
Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins.
in the ground, with a collar of stone, 3 ft. base to
top, with brass cap mkd.

T3N R25E

¼ S26

S35

1963

- Deposit the original stone alongside the iron post.

- S. 89°41' E., beginning new measurement.
Asc. 5 ft. over SW. slope.
- 2.30 Spur, projects S; desc. 10 ft. over SE. slope.
- 15.50 Head of gulch, drains S.; asc. 140 ft. over broken SW.
slope.
- 24.30 Enter dense aspen.
- 33.10 Leave aspen.
- 40.17 Intersect the Utah-Colorado State Line.
The closing cor. of secs. 26 and 35, monumented with a

Dependent Resurvey of the Subdivisional Lines of T. 3 N., R. 25 E.

C82428

sandstone, 16x11x10 ins., firmly set and mkd. as described in the official record.

The original bearing tree was not found.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with a collar of stone, 2 ft. base to top, with brass cap mkd.

T3N	C
R25E	O
	L
S26	O
CC	R
S35	A
	D
	O
	1963

Deposit the original stone alongside the iron post and raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

From this cor., the point for the 274 Mile Cor., established in connection with the 1963 retracement of the Utah-Colorado State Line, this group, bears N. 0°16' W., 3.32 chs. dist., and is monumented with an unmarked cedar post, 6 ins. diam., extending 4 ft. above the ground.

Land, high rolling plateau.
Soil, rocky clay.
Timber, pine, pinon and aspen.
Undergrowth, sagebrush and grass.

From the cor. of secs. 26, 27, 34 and 35.

N. 0°11' E., bet. secs. 26 and 27.

Desc. 250 ft. over NW. slope, changing to N. slope, through scattered pinon and aspen.

- 6.00 Enter dense grove of aspen.
- 14.00 Spring branch, course NW.
- 14.40 Trail road, bears E. and W.
- 16.40 Leave aspen grove; continue through scattered aspen.
- 17.90 Draw, drains W.; trail road follows bottom of draw; asc. 115 ft. over S. slope.
- 22.90 Spur, projects W.; desc. 350 ft. over N. slope.
- 29.00 Trail road, bears NE. and SW.
- 39.73 The ¼ sec. cor. of secs. 26 and 27, monumented with a sandstone, 15x8x6 ins., firmly set and mkd. as described in the official record.

There is no remaining evidence of the original bearing tree.

At the cor. point

Dependent Resurvey of the Subdivisional Lines of T. 2 N., R. 2 E.

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T3N R25E

½
S27 S26
1963

Deposit the original stone alongside the iron post.

N. 1°07' E., beginning new measurement.

Desc. 100 ft. over broken NW. slope.

- 3.20 Dozed road, bears E. and W.; desc. 20 ft.; thence across the bottom of canyon.
- 6.20 Branch of Willow Creek, 2 lks. wide, 2 ins. deep, course SW.
- 7.60 Unimproved dirt road, bears NE. and SW.; thence asc. 480 ft. over broken S. slope.
- 20.70 Spur, projects SW.
- 25.70 Head of draw; wash, 30 lks. wide, 10 ft. deep, drains SW.
- 39.79 Point for the cor. of secs. 22, 23, 26 and 27 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T3N R25E

S22 S23
S27 S26
1963

Land, mountainous.

Soil, rocky clay.

Timber, scattering pinon and aspen on South ½ mile.

Undergrowth, sagebrush and grass.

From the cor. of secs. 21, 22, 27 and 28.

S. 88°53' E., bet. secs. 22 and 27.

Desc. 170 ft. over E. slope.

- 6.60 Draw, drains SE.; asc. 100 ft. over W. slope.
- 17.30 Spur, projects SE.; desc. 440 ft. over E. slope.
- 40.01 Point for the ½ sec. cor. of secs. 22 and 27 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

Dependent Resurvey of the Subdivisional Lines of T. 3 N., R. 25 E.

CHAINS

T3N R25E

 $\frac{1}{4}$ $\frac{S22}{S27}$
1963

Desc. 440 ft. over E. slope.

51.70 Dozed road in the bottom of Willow Creek Canyon; course of Willow Creek, S.; at this point the water flows underground, disappearing approx. 10.00 chs. N.

Asc. 480 ft. over steep W. slope.

68.70 Spur, projects S.; desc. 45 ft. over SE. slope.

80.02 The cor. of secs. 22, 23, 26 and 27.

Land, mountainous.

Soil, rocky clay.

Timber, none.

Undergrowth, sagebrush, grass, and some choke cherry along the bottom of Willow Creek.

S. 89°51' E., bet. secs. 23 and 26.

Desc. gradually over SE. slope.

7.50 Enter head of draw, drains SW.; asc. 130 ft. over SW. slope.

29.10 Ridge, bears N. and S.; desc. 190 ft. over broken E. slope.

39.50 Dozed road, bears N. and S.; desc. 20 ft. to cor.

39.92 Point for the $\frac{1}{4}$ sec. cor. of secs. 23 and 26 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T3N R25E

 $\frac{1}{4}$ $\frac{S23}{S26}$
1963
raise a mound of stone, 3 ft. base, 2 $\frac{1}{2}$ ft. high, N. of cor.

Desc. 55 ft. over E. slope.

42.30 Spring branch, 1 lk. wide, 1 in. deep, course S.; asc. 85 ft. over W. slope.

46.40 Spur, projects S.; desc. 100 ft. over broken E. slope.

69.30 Wash in bottom of draw, 10 lks. wide, 2 ft. deep, drains SE.; asc. 50 ft. over W. slope.

75.80 Spur, projects S.; desc. 20 ft. over E. slope.

79.09 Intersect the Utah-Colorado State Line.

The closing cor. of secs. 23 and 26, monumented with a sandstone, 20x12x6 ins, firmly set, mkd. and witnessed as described in the official record.


Dependent Resurvey of the Subdivisional Lines of T. 3 N., R. 25 E.

CHAINS

STAKES

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 15 ins in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

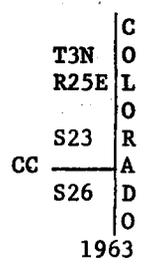

Deposit the original stone alongside the iron post.

From this cor., the 275 Mile Cor. on the Utah-Colorado State Line, bears N 0°16' W, 3.35 chs. dist., and is monumented with an iron post, 2½ ins. diam., firmly set, mkd. and witnessed as described in the field notes of the 1963 retracement of the Utah-Colorado State Line, this group.

Land, mountainous.
Soil, rocky clay.
Timber, scattered patches of aspen.
Undergrowth, sagebrush and grass.


From the cor. of secs. 22, 23, 26 and 27.

N. 0°24' W., bet. secs. 22 and 23.

Asc. 210 ft over S. slope.

- 7.80 Ridge, bears NE. and SW.; desc. 200 ft. over NW. slope.
- 20.90 Gulch, drains W.; asc. 120 ft. over S. slope.
- 27.80 Spur, slopes SW.; desc. 220 ft. over NW. slope.
- 39.78 Point for the ¼ sec. cor. of secs. 22 and 23 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.



Desc. 20 ft.

- 41.80 Willow Creek, 2 lks. wide, 2 ins. deep, course SW.; asc. 530 ft. over broken SE. slope.
- 50.30 Gulch, drains SE.
- 67.10 Spur, projects SE.
- 79.56 The cor. of secs. 14, 15, 22 and 23, monumented with a sandstone, 12x10x6 ins, firmly set, mkd. and witnessed as described in the official record.

At the cor. point

Dependent Resurvey of the Subdivisional Lines of T. 3 N., R. 25 E.

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T3N R25E

$\frac{S15}{S22}$ | $\frac{S14}{S23}$

1963

Deposit the original stone alongside the iron post.

Land, mountainous.

Soil, rocky clay.

Timber, none.

Undergrowth, sagebrush and grass.

From the cor. of secs. 15, 16, 21 and 22.

S. $87^{\circ}25'$ E., bet. secs. 15 and 22.

Desc. 240 ft. over E. slope.

9.00 Trail road, bears NE. and SW.

15.00 Unimproved dirt road, bears NW. and SE.

15.70 Spring branch in bottom of Crumb Canyon, 4 lks. wide, 2 ins. deep, course SE.; asc. 150 ft. over SW. slope.

28.20 Spur, projects SW.; desc. 40 ft. over SE. slope.

39.02 The $\frac{1}{4}$ sec. cor. of secs. 15 and 22, monumented with a sandstone, 12x10x4 ins., firmly set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T3N R25E

$\frac{1}{4}$ $\frac{S15}{S22}$

1963

Deposit the original stone alongside the iron post.

N. $89^{\circ}07'$ E., beginning new measurement.

Asc. 220 ft. over broken SW. slope.

4.20 Spur, projects SW.

14.50 Head of draw, drains SW.

22.50 Trail road, bears N. and S.

22.80 Ridge, bears N. and S.; desc. 240 ft. over broken SE. slope.

30.40 Spur, projects SE.

39.89 The cor. of secs. 14, 15, 22 and 23.

Land, mountainous.

Soil, rocky clay.

Dependent Resurvey of the Subdivisional Lines of T. 3 N., R. 25 E.

CHAINS

Timber, none.
Undergrowth, sagebrush and grass.

S. 89°11' E., bet. secs. 14 and 23.

Asc. 60 ft. over SW. slope, through head of draw, drains S.

12.50 Spur, projects S.; desc. 340 ft. over broken SE. slope.

19.10 Gulch, drains S.

24.10 Spur, projects S.

39.70 Willow Creek, 2 lks. wide, 1 in. deep, course SW.

40.03 The $\frac{1}{2}$ sec. cor. of secs. 14 and 23, monumented with a sandstone, 6x4x2 ins., firmly set and mkd. as described in the official record.

There is no remaining evidence of the original bearing trees.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 20 ins. in the ground, and in a collar of stone, 2 ft. base to top, with brass cap mkd.

T3N R25E

$\frac{1}{2}$ $\frac{S14}{S23}$

1963

Deposit the original stone alongside the iron post.

N. 89°31' E., beginning new measurement.

Asc. 320 ft. over rolling NW. slope.

26.20 Unimproved dirt road, bears N. and S.

38.99 Intersect the Utah-Colorado State Line.

The closing cor. of secs. 14 and 23, monumented with a sandstone, 15x10x9 ins., firmly set, mkd. and witness-ed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T3N C
R25E O
L
S14 O
CC — R
S23 A
D
O
1963

Deposit the original stone alongside the iron post.

From this cor., the 276 Mile Cor. on the Utah-Colorado State Line, bears N. 0°30' W., 3.28 chs. dist., and is monumented with an iron post, firmly set, mkd. and

Dependent Resurvey of the Subdivisional Lines of T. 3 N., R. 25 E.

CHAINS

witnessed as described in the field notes of the 1963 retracement of the Utah-Colorado State Line, this group.

Land, mountainous.

Soil, rocky clay.

Timber, scattered aspen in bottom of Willow Creek Canyon

Undergrowth, heavy sagebrush and scattering grass.

From the cor. of secs. 14, 15, 22 and 23.

N. 0°06' E., bet. secs. 14 and 15.

Asc. 440 ft. over SE. slope, changing to S. slope.

23.10 Ridge, bears E. and W.; desc. 20 ft. over N. slope.

34.30 Unimproved dirt road, bears NE. and SW.

39.91 The $\frac{1}{4}$ sec. cor. of secs. 14 and 15, monumented with a sandstone, 18x6x5 ins., firmly set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 20 ins. in the ground, with a collar of stone, 2 $\frac{1}{2}$ ft. base to top, with brass cap mkd.

T3N R25E

$\frac{1}{4}$

S15|S14

1963

Deposit the original stone alongside the iron post.

N. 0°11' E., beginning new measurement.

Desc. 320 ft. over N. slope.

18.90 Enter dense aspen.

21.00 Leave aspen.

24.06 Intersect the Utah-Wyoming State Line.

The closing cor. of secs. 14 and 15, monumented with a sandstone, 15x10x5 ins., firmly set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with a collar of stone, 3 ft. base to top, with brass cap mkd.

WYOMING

S15|S14

C C

T3N R25E

1963

Deposit the original stone alongside the iron post.

From this cor., the point for the 263 Mile Cor. on the Utah-Wyoming State Line, established in connection with the 1963 retracement of the Utah-Wyoming State Line, this group, bears S. 89°50' E., 26.68 chs. dist., and is

CHAINS

monumented with an unmarked cedar post, 6 ins. diam., extending 4½ ft. above the ground.

Land, mountainous.

Soil, rocky clay.

Timber, dense aspen North 5.00 chs.

Undergrowth, sagebrush and grass.

General Description

The land within Township 3 North, Range 25 East is generally mountainous. A high ridge extends from the North boundary of sec. 16, south through the South boundary of sec. 33, and is the dividing line between the drainages of Willow Creek to the east and Basin Creek to the west. The elevation of the township ranges from about 6900 ft. above sea level in the lower reaches of the canyons to about 9000 ft. on Willow Creek Butte located in sec. 15.

Willow Creek enters the township in the SE. cor. of sec. 14 and flows in a southwesterly direction, leaving the township on the South boundary of sec. 33. Basin Creek heads in the middle portion of sec. 17 flowing in a southerly direction to sec. 33, changing its course to west; and leaving the township near the SE. cor. of sec. 33. Both creeks are fed by a number of springs located within the township.

The soil is principally rocky clay. Most of the land is covered with a scattered to heavy growth of sagebrush and grass. Scattered to dense growths of aspen, pine and mahogany are found at the higher elevations. Scattered to dense growths of pinon and juniper are found in the southern and western portions of the township.

There are several good dirt roads providing access to most of the township. Also, numerous trail roads are located throughout the township, providing limited access to more inaccessible areas.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS

NAMES	CAPACITY
Paul Mahler	Notekeeper
Jerry Thomas	Chainman
Joe Gleave	Flagman
Ray Muniz	Cornerman
Phylip Leslie	Notekeeper
Dennis Badger	Chainman
Chad Smith	Flagman
William Lewis	Cornerman

CERTIFICATE OF SURVEY

I, Fred R. Chappell, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 25th day of May, 19 62, I have made a dependent resurvey of the South boundary and the subdivisional lines of Township 3 North, Range 25 East

of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

June 4, 1965 (Date)

Fred R. Chappell (Cadastral Surveyor)

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

SUBMITTED FOR APPROVAL Date AUG 6 1965

BUREAU OF LAND MANAGEMENT, Washington, D. C.

The foregoing field notes of the dependent resurvey of the South boundary and the subdivisional lines of Township 3 North, Range 25 East

executed by Fred R. Chappell, Cadastral Surveyor, having been critically examined and found correct, are hereby approved.

DEC 22 1965 (Date)

J. L. Jamington (Chief, Division of Engineering)

CERTIFICATE OF TRANSCRIPT

I CERTIFY That the foregoing transcript of the field notes of the above described surveys in, is a true copy of the original field notes.

(Date)

(Chief, Division of Engineering)

Blank

Page

Blank

Page

FIELD NOTES

OF THE

RETRACEMENT OF THE UTAH-ARIZONA STATE BOUNDARY

BETWEEN MILE POST 126 AND THE SOUTH 1/4 SECTION

CORNER OF SECTION 8, AND BETWEEN MILE POST 122

AND THE CLOSING CORNER OF TOWNSHIP 44 SOUTH

RANGES 1 EAST AND 1 WEST

AND

THE SURVEY OF A PORTION OF THE WEST BOUNDARY

(SALT LAKE MERIDIAN)

AND

A PORTION OF THE SUBDIVISION

OF

TOWNSHIP 44 SOUTH, RANGE 1 EAST

Of the SALT LAKE Meridian,

the State of UTAH

EXECUTED BY

GLEN B. HATCH

CADASTRAL SURVEYOR

Under special instructions dated OCTOBER 15, 19 64, which provided for the surveys

included under Group Number 476, approved OCTOBER 15, 1964,

and assignment instructions dated NOVEMBER 2, 19 64.

Survey commenced NOVEMBER 25, 19 64

Survey completed DECEMBER 8, 19 64

BUR OF LAND MGMT
1966 MAR 21 AM 10 00 0

INDEX DIAGRAM

Township 44 SOUTH, Range 1 EAST

	6	5	4	3	2	1
				7		
			9	8		
5	5	4	10	9	6	
UTAH						
ARIZ.	7	8	9	10	11	12
M.P. 121	M.P. 122	M.P. 123	M.P. 124	M.P. 125	M.P. 126	M.P. 127
	18	17	16	15	14	13
	19	20	21	22	23	24
	30	29	28	27	26	25
	31	32	33	34	35	36

CHAINS

The south boundary, (Utah-Arizona State Boundary), was surveyed by Howard B. Carpenter in 1901, and the record appears in the field notes of the boundary line between Utah and the Territory of Arizona. In 1917, Elliot Bird retraced this line between mile posts 121 and 127, and surveyed the east boundary, the west boundary, (Salt Lake Meridian), and the subdivisional lines north of the offset Utah-Arizona State Boundary, and the record appears in the 1917 field notes of Township 44 South, Range 1 East. The east 4 miles of the north boundary was surveyed by J. G. Burrill in 1877. In 1917, Andrew Nelson resurveyed the east 4 miles of the north boundary, and surveyed the west 2 miles of the north boundary, and the record appears in the 1917 field notes of Township 43 South, Range 1 East.

The following field notes are those of the retracement of the south boundary, (Utah-Arizona State Boundary), between mile post 126 and the south $\frac{1}{4}$ section corner of section 8, between mile post 122 and the closing corner of Township 44 South, Range 1 East and 1 West, and the survey of the west boundary, (Salt Lake Meridian), and the subdivisional lines south of the offset Utah-Arizona State Boundary, of Township 44 South, Range 1 East.

The survey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1947, and special instructions dated October 15, 1964.

All lines of this survey were run by direct method where the lines were accessible; lines inaccessible were run by traverse or triangulation methods. Distances to topography on lines run by traverse or triangulation are approximately as scaled from U. S. G. S. topographic sheet "Paria, Utah". The details of such traverses or triangulations have been thoroughly checked and verified, and in order to simplify the record the diagrams and reductions are omitted from these field notes.

The direction of the lines of this survey were determined by reference to true meridians established on line by altitude observations on the sun. The lines were carried forward by sustained angulation.

The geographic position for the southeast corner of section 11 is at latitude $37^{\circ}00'02''$ N., and longitude $111^{\circ}45'48''$ W., as scaled from U. S. G. S. quadrangle sheet Paria, Utah-Ariz., dated 1954.

The magnetic declination was read at several stations throughout the township and the average of these readings was found to be 15° East.

Retracement of the South Boundary,
(Utah-Ariz. State Bdy.), T. 44 S., R. 1 E.

The State Boundary was originally surveyed on an offset line bet. mile post 119 and 122, and bet. mile post 122 and mile post 126. This retracement is calculated to be on the true boundary, based on the record of the 1917 retracement of the offset boundary.

Beginning at mile post 126, on the Utah-Arizona State Boundary, which is monumented with an iron post, 3 ins. diam., 5 ft. above ground, and in a mound of stone, 4 ft. base, $2\frac{1}{2}$ ft. high, with cap mkd.

Retracement of the South Boundary
(Utah-Ariz. State Bdy.) T. 44 S., R. 1 E.

CHAINS

UTAH
126 M
ARIZ

Thence,

N. 89°47' W., along the 126th mile.

Over gently rolling desert land through widely scattered scrub juniper timber with sagebrush undergrowth. Desc. 90 ft. over gentle NW. slope.

15.52 Point for the S. $\frac{1}{2}$ sec. cor. of sec. 11, T. 44 S., R. 1 E., hereinafter described.

Desc. 160 ft. over NW. slope.

35.90 Wash, in Judd Hollow, drains SW.; asc. 150 ft. over SE. slope.

55.52 Point for the closing cor. of secs. 10 and 11, T. 44 S., R. 1 E., hereinafter described.

Asc. 45 ft. over solid sandstone on SE. slope.

61.70 Top of low sandstone ledges, bears N. and S.; asc. 30 ft. over gentle SE. slope.

70.40 The closing cor. of secs. 31 and 32, T. ⁴⁴~~42~~ N., R. 6 E., G. and S. R. M., Arizona, bears South, 34 lks. dist., monumented with an iron post, 2 $\frac{1}{2}$ ins. diam., 8 ins. above ground, with brass cap mkd.

UTAH

S31 | S32

⁴⁴ CC

T⁴⁴2N R6E

ARIZ

1957

73.50 Top of ascent slopes S.; desc. 15 ft. over gentle SW.

79.90 True point for mile cor. 125.

From which the witness mile cor. 125, is North 42.18 chs. and East 6.57 chs., (Record witness distance), and is monumented with an iron post, 2 ins. diam., 24 ins. above ground, with cap mkd.

UTAH

WC 125.M

ARIZ

At the mile cor. point

Set an unmarked steel fence post, 5 $\frac{1}{2}$ ft. long, 3 ft. in the ground.

Land, gently rolling desert.

Soil, sand, with exposed sandstone.

Timber, widely scattered scrub juniper.

Undergrowth, scattered sagebrush and grass.

S. 89°50' W., along the 125th mile.

Over gently rolling desert land through scattered sagebrush and grass undergrowth. Desc. 90 ft. over gentle SW. slope.

Retracement of the South Boundary
(Utah-Ariz. State Bdy.) T. 44 S., R. 1 E.

CHAINS	
15.64	Point for the S. ¼ sec. cor. of sec. 10, T. 44 S., R. 1 E., hereinafter described.
26.80	Rocky draw, drains irregularly S.; asc. 100 ft. over SE. slope.
52.80	Base of sandstone ledges, bears N. and curves SW.; asc. abruptly 100 ft. over solid sandstone on SE. slope.
55.66	Point for the closing cor. of secs. 9 and 10, T. 44 S., R. 1 E., hereinafter described.
	Thence, by triangulation; asc. abruptly about 40 ft. over SE. slope.
57.80	Top of ascent on sandstone spur, slopes sharply SE.; desc. about 100 ft. over solid sandstone on precipitous SW. slope.
62.60	Bottom of descent, near head of rocky draw, drains S.; asc. abruptly about 360 ft. over broken and precipitous SE. slope.
74.25	Rim of mesa spur, bears S. and curves NE.; asc. 10 ft. over gentle E. slope.
75.40	Top of ascent. End of one triangulation and beginning of another. Desc. 10 ft. over gentle W. slope.
76.95	Rim of mesa spur, top of ledge, about 200 ft. high, bears N. and S.
	Desc. abruptly about 100 ft. over near vertical ledge facing SW.
80.82	True point for mile cor. 124, falls on near vertical ledge and cannot be monumented.
	From which the witness mile cor. 124, bears North, 42.41 chs. dist., (Record witness distance), and is monumented with an iron post, 2 ins. diam., 24 ins. above ground, with cap mkd.
	<p style="text-align: center;">UTAH WC 124 M ARIZ</p>
	<p>Land, gently rolling E. portion; broken W. portion. Soil, sandy E. portion; sandy and exposed sandstone W. portion. Timber, scattered scrub juniper along mesa top. Undergrowth, sagebrush and grass.</p>
	S. 89°47' W., along the 124th mile.
	Over broken land through scattered sagebrush and grass undergrowth; continue same triangulation; desc. about 200 ft. over precipitous sandstone ledges on SW. slope.
4.90	Base of ledges, bears NW. and SE.; end triangulation; desc. 120 ft. over W. slope.
14.765	Point for the S. ¼ sec. cor. of sec. 9, T. 44 S., R. 1 E., hereinafter described.
22.60	Wash, 30 lks. wide, 3 ft. deep, drains S.; asc. 40 ft. over gentle SE. slope.
27.70	Base of sandstone ledges, bears NW. and SE.; thence by triangulation; asc. abruptly about 300 ft. over solid sandstone on precipitous NE. slope.
40.20	Top of ascent on knobby sandstone spur, slopes SE.; desc. about 80 ft. over solid sandstone along precipitous S. slope.

Retracement of the South Boundary
(Utah-Ariz. State Bdy.), T. 44 S., R. 1 E.

CHAINS	
54.69	Point for the closing cor. of secs. 8 and 9, T. 44 S., R. 1 E., hereinafter described.
55.50	Point of sandstone spur, slopes sharply S.; end of one triangulation and beginning of another; desc. about 180 ft. over solid sandstone on precipitous SW. slope.
77.53	<p>True point for mile cor. 123. End triangulation.</p> <p>From which the witness mile cor. 123, bears North, 21.81 chs. dist., (Record witness distance), and is monumented with a sandstone, 20x15x10 ins., firmly set in a mound of stone, and plainly mkd.</p> <p style="text-align: center;">WC U on N., A on S., and 123 M on W. face.</p> <p>At the mile cor. point</p> <p>Set an unmarked steel fence post, 5½ ft. long, on solid sandstone, and in a mound of stone, 4 ft. base, 2½ ft. high.</p> <p>Land, broken. Soil, sand, with considerable exposed sandstone. No timber. Undergrowth, scattered sagebrush and grass.</p>
0.50	<p>S. 89°45' W., along the 123rd mile.</p> <p>Over broken precipitous land through scattered sagebrush and grass undergrowth. By triangulation.</p> <p>Shallow draw, drains SE.; asc. abruptly about 530 ft. over solid sandstone ledges on precipitous E. slope.</p>
15.70	Rim of mesa, top of ledge, bears N. and S.; end triangulation.
17.19	<p>The S. ¼ sec. cor. of sec. 8, T. 44 S., R. 1 E., monumented with a sandstone, 20x12x6 ins., firmly set in a mound of stone, 4 ft. base, 1½ ft. high, and mkd. ¼ on N. face.</p> <p>At the cor. point</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.</p> <p style="text-align: center;">U T44S R1E ¼ S8 A 1964</p> <p>Land, broken. Soil, sand, with considerable exposed sandstone. No timber. Undergrowth, scattered sagebrush and grass.</p>
	<p>From mile post 122, which is monumented with a sandstone, 30x18x6 ins., firmly set and plainly mkd.</p> <p style="text-align: center;">UTAH on the N., 37N on E., ARIZ on S., and 122 M on W. face.</p> <p>At the mile cor. point</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>

Retracement of the South Boundary
(Utah-Ariz. State Bdy.), T. 44 S., R. 1 E.

CHAINS

U
122 — M
A
1964

Bury original mile cor. alongside iron post.

Thence,

S. 89°49' W., along the 121st mile.

Over sandy desert land through scattered scrub juniper timber. Desc. 15 ft. over gentle W. slope.

16.98 Point for the S. 1/2 sec. cor. of sec. 7, T. 44 S., R. 1 E. at 40.00 chs. westing from the closing cor. of secs. 7 and 8.

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 15 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

U
T44S R1E
1/2 S7
A
1964

Cor. located on W. slope of low, red shale bank.

18.50 Rim of mesa, bears SE. and irregularly W.; thence by triangulation; desc. about 480 ft. over solid sandstone along broken and precipitous S. slope.

59.83 Point for the closing cor. of Tp. 44 S., Rs. 1 E. and 1 W., hereinafter described.

Land, broken.
Soil, sandy, with exposed sandstone.
Timber, scattered scrub juniper on mesa.
Undergrowth, sagebrush and grass.

Survey of a Portion of the W. Bdy., (Salt Lake Meridian),
T. 44 S., R. 1 E.

From the cor. of secs. 6 and 7, on the W. bdy. of the Tp., monumented with an iron post, 2 ins. diam., 12 ins. above ground, with brass cap mkd.

T44S
R1E
S6
S7

1917

South, bet. secs. 7 and 12.

Over high mesa land through scattered scrub juniper timber. Desc. 40 ft. over gentle S. slope.

1.12 The witness closing cor. of secs. 7 and 12, monumented with a sandstone, 28x11x5 ins., firmly set and plainly mkd.

U WCC on N.,
6 notches on E.,
A on S., and
6 notches on W. face.

Retracement of the South Boundary
(Utah-Ariz. State Bdy.), T: 44 S., R: 1 E.

CHAINS	BALANCE
	This cor. will now function as an amended monument only, and I destroy the markings on the original bearing trees and stone, and add A M to the original cor. monument.
4.20	Rim of mesa, bears irregularly E. and W.; thence by triangulation; desc. about 400 ft. over broken and precipitous S. slope. Leave timber.
10.00	Base of ledges, bears W. and curves SE.; desc. 80 ft. over sandy S. slope.
19.00	Wash, 20 lks. wide, 6 ft. deep, drains S. 80° W.; asc. 30 ft. over N. slope.
23.06	Intersect the Utah-Arizona State Boundary. Point for the closing cor. of Tp. 44 S., Rs. 1 E. and 1 W. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone to top, with brass cap mkd.
	U T44S R1W R1E CC S12 S7 A 1964
	From this cor., the true point for mile post 121, on the Utah-Arizona State Boundary, bears S. 89°49' W., 20.08 chs. dist. (Mile post 121 is witnessed North, 22.00 chs. dist.).
	Land, broken. Soil, sand, with exposed sandstone. Timber, scattered scrub juniper on mesa. Undergrowth, sagebrush and grass.
	Survey of a Portion of the Subdivision, T. 44 S., R. 1 E.
	From the true point for cor. of secs. 2, 3, 10 and 11, from which the witness cor. of secs. 2, 3, 10 and 11, bears East, 3.70 chs. dist., monumented with an iron post, 2 ins. diam., 24 ins. above ground, and in a mound of stone, 3 ft. base, 1½ ft. high, with brass cap mkd.
	T44S R1E S3 S2 WC S10 S11 1917
	Thence, S. 0°01' E., bet. secs. 10 and 11. Over broken sandstone ledges. By traverse; desc. about 100 ft. over broken SE. slope.
4.00	Base of sandstone ledges, bears SW. and curves N., desc. about 100 ft. over SE. slope. Enter scattered juniper timber.
22.14	Intersect the Utah-Arizona State Boundary. Point for the closing cor. of secs. 10 and 11.

Survey of a Portion of the Subdivision, T. 44 S., R. 1 E.

CRAINS

Drill an iron post, 12 ins. long, 1 in. diam., 8 ins. in solid sandstone, with brass cap mkd.

U
T44S R1E
CC
|
S10 | S11
A

1964

From this cor., true point for mile post 125, on the Utah-Arizona State Boundary, bears N. 89°47' W., 24.38 chs. dist., hereinbefore described.

Land, broken.
Soil, sand, with exposed sandstone.
Timber, scattered juniper.
Undergrowth, sagebrush and grass.

Point for the S. 1/2 sec. cor. of sec. 11, on the Utah-Arizona State Boundary, and mid point bet. the closing cor. of secs. 10 and 11, and the closing cor. of secs. 11 and 12.

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.

U
T44S R1E

1/2 S11
A

1964

Set a steel fence post, 5 1/2 ft. long, alongside iron post.

From this cor., mile post 126, on the Utah-Arizona State Boundary, bears S. 89°47' E., 15.52 chs. dist., hereinbefore described.

From the witness cor. of secs. 3, 4, 9 and 10, which is an iron post, 2 ins. diam., 30 ins. above ground, and in a mound of stone, 3 ft. base, 1 1/2 ft. high, with brass cap mkd. as described in the official record. This cor. will now function as a witness point only, and I destroy the markings on the original bearing trees and remark the brass cap.

T44S R1E

S4 | S3
WP
64
1917

Thence,

S. 0°02' E., bet. secs. 3 and 4.

2.00 Over broken land through scattered juniper timber. Rim of mesa, bears irregularly S. and curves NE.; thence by traverse; desc. about 40 ft. along broken and precipitous E. slope. Leave timber.

15.00 Point of spur, slopes sharply SE.; desc. about 160 ft. over solid sandstone ledges on SE. slope.

CHAINS

20.17

Point for the cor. of secs. 3, 4, 9 and 10, 80.00 chs. southing from the cor. of secs. 3, 4, 33 and 34 on the N. bdy. of the Tp.

Drill an iron post, 14 ins. long, 1 in. diam., 6 ins. in solid sandstone, and in a collar of stone, with brass cap mkd.

T44S R1E

$\frac{S4}{S9} | \frac{S3}{S10}$

1964

Cor. located on sandstone shelf at base of ledge, curves SE. and NE.

Land, broken.

Soil, sand, with exposed sandstone ledges.

Timber, scattered juniper on mesa.

Undergrowth, sagebrush and grass.

From the true point for cor. of secs. 2, 3, 10 and 11, hereinbefore described.

S. 89°57' W., bet. secs. 3 and 10.

Over broken land through scattered juniper timber. Asc. abruptly 350 ft. over solid sandstone ledges on SE. slope.

4.50 Rim of mesa, top of ledges, bears N. and S.; asc. 60 ft. over E. slope.

8.40 Top of ascent, bears N. and S.; desc. 30 ft. over W. slope.

10.00 Rim of mesa, top of ledges, bears N. and S.; thence by triangulation; desc. about 300 ft. over broken and precipitous W. slope.

20.00 Base of ledges, bears N. and S.; desc. about 80 ft. over sandy SW. slope.

38.80 End triangulation.

39.98 Point for the $\frac{1}{2}$ sec. cor. of secs. 3 and 10.

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., on solid sandstone, and in a mound of stone, 4 $\frac{1}{2}$ ft. base to top, with brass cap mkd.

T44S R1E

$\frac{1}{2} \frac{S3}{S10}$

1964

Note: the line bet. secs. 3 and 10 was originally surveyed on the offset Utah-Arizona State Boundary, and I destroy all evidence of the original witness $\frac{1}{2}$ sec. cor. of secs. 3 and 10.

40.50 Wash, 30 lks. wide, 5 ft. deep, drains irregularly SW.; asc. 100 ft. over gently rolling SE. slope.

73.00 Base of sandstone ledges, curves SE. and NE.; asc. abruptly 140 ft. over broken SE. slope.

Survey of a Portion of the Subdivision, T. 44 S., R. 1 E.

CHAINS
79.96

The cor. of secs. 3, 4, 9 and 10.

Land, broken and gently rolling.
Soil, sand, with exposed sandstone.
Timber, scattered juniper.
Undergrowth, sagebrush and grass.

S. 0°02' E., bet. secs. 9 and 10.

Over broken land through widely scattered juniper timber.
By traverse; desc. about 140 ft. along broken and ledgy E.
slope.


11.00 Small draw, drains E.; asc. about 150 ft. over solid sand-
stone on NE. slope.

21.00 Top of ascent slopes sharply SE.; desc. 50 ft. over SE.
slope.

22.17 Intersect the Utah-Arizona State Boundary.

Point for the closing cor. of secs. 9 and 10.

Drill an iron post, 12 ins. long, 1 in. diam., 8 ins. in
solid sandstone, with brass cap mkd.




1964

From this cor., the true point for mile post 124, on the
Utah-Arizona State Boundary, bears S. 89°50' W., 25.16 chs.
dist., hereinbefore described.

Land, broken.
Soil, sand, with exposed sandstone.
Timber, widely scattered juniper.
Undergrowth, sagebrush and grass.

Point for the S. $\frac{1}{4}$ sec. cor. of sec. 10, on the Utah-
Arizona State Boundary, and mid point bet. the closing
cor. of secs. 9 and 10, and the closing cor. of secs. 10
and 11.

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in
the ground, with brass cap mkd.



1964

Raise a mound of stone, 3 ft. base, 1 $\frac{1}{2}$ ft. high, N. of
cor.

From this cor., the true point for mile post 125, on the
Utah-Arizona State Boundary, bears N. 89°50' E., 15.64 chs.
dist., hereinbefore described.

From the cor. of secs. 3, 4, 9 and 10.

Survey of a Portion of the Subdivision, T. 44 S., R. 1 E.

CHAINS

West, bet. secs. 4 and 9.
 Over broken land through scattered juniper timber. By triangulation; asc. about 200 ft. over broken and precipitous ledges on SE. slope.
 2.40 Rim of mesa, top of ledges, bears irregularly N. and S.; asc. 25 ft. over gentle E. slope.
 11.10 Top of ascent, bears N. and S. End of one triangulation and beginning of another.
 13.90 Rim of mesa, top of ledges, bears N. and S.; desc. about 360 ft. over broken and precipitous W. slope.
 27.90 Rocky draw, drains S.; asc. about 200 ft. over broken sandstone ledges on SE. slope.
 37.90 Point of sandstone spur, slopes sharply S. End triangulation. Desc. 50 ft. over SW. slope.
 39.97 Point for the $\frac{1}{2}$ sec. cor. of secs. 4 and 9.
 Drill an iron post, 18 ins. long, 1 in. diam., 6 ins. in solid sandstone, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T44S R1E

$\frac{1}{2} \frac{S4}{S9}$

1964

Note: the line bet. secs. 4 and 9 was originally surveyed on the offset Utah-Arizona State Boundary, and I destroy all evidence of the original witness $\frac{1}{2}$ sec. cor. of secs. 4 and 9.

Thence, by triangulation; desc. about 160 ft. over solid sandstone on SW. slope.

50.00 Sandstone draw, drains S.; asc. about 160 ft. over broken SE. slope.
 55.00 Point of sandstone spur, slopes sharply SE.; desc. about 160 ft. over solid sandstone on SW. slope.
 63.00 Draw, drains SE.; asc. abruptly about 450 ft. over broken and precipitous E. slope.
 69.40 Rim of mesa, bears irregularly N. and S. End triangulation. Asc. 25 ft. over gentle E. slope. Enter juniper timber.
 79.94 The cor. of secs. 4, 5, 8 and 9, monumented with an iron post, 2 ins. diam., 12 ins. above ground, with brass cap mkd.

T44S R1E

$\frac{S5|S4}{S8|S9}$

1917

Land, broken.
 Soil, sand, with exposed sandstone.
 Timber, scattered juniper.
 Undergrowth, sagebrush and grass.

S. 0°03' E., bet. secs. 8 and 9.

Survey of a Portion of the Subdivision, T. 44 S., R. 1 E.

CHAINS

Over gently rolling mesa through scattered juniper timber. Asc. 35 ft. over gentle N. slope.

9.80 Rim of mesa, bears irregularly E. and W.; thence by triangulation; desc. about 550 ft. over broken and precipitous S. slope. Leave timber.

22.42 Intersect the Utah-Arizona State Boundary.

Point for the closing cor. of secs. 8 and 9.

Drill an iron post, 12 ins. long, 1 in. diam., 8 ins. in solid sandstone, with brass cap mkd.

U
T44S R1E
CC
S8 | S9

A

1964

Cor. located on edge of ledge, about 150 ft. high, bears W. and NE.

From this cor., the true point for mile post 123, on the Utah-Arizona State Boundary, bears S. $89^{\circ}47'$ W., 22.84 chs. dist., hereinbefore described.

Land, mesa, N. portion; broken S. portion.
Soil, sand, with exposed sandstone ledges.
Timber, scattered juniper on mesa.
Undergrowth, sagebrush and grass on mesa.

Point for the S. $\frac{1}{2}$ sec. cor. of sec. 9, on the Utah-Arizona State Boundary, and mid point bet. the closing cor. of secs. 8 and 9, and the closing cor. of secs. 9 and 10.

Drill an iron post, 12 ins. long, 1 in. diam., 6 ins. in solid sandstone, with brass cap mkd

U
T44S R1E
 $\frac{1}{2}$ S9

A

1964

From this cor., the true point for mile post 124, on the Utah-Arizona State Boundary, bears N. $89^{\circ}47'$ E., 14.765 chs. dist., hereinbefore described.

General Description

Township 44 South, Range 1 East, is located about 40 miles east of Kanab, Utah, on the Utah-Arizona State Boundary. This area is extremely rough and broken land along the north side of Paria River. Timber consists of scattered scrub juniper and the undergrowth is sagebrush and grass. The soil is sandy, with considerable exposed sandstone and sandstone ledges. The drainage is to the south to the Paria River, which is the only water source in the area.

CERTIFICATE OF SURVEY

I, **Glen B. Hatch**, HEREBY CERTIFY upon honor that
in pursuance of special instructions bearing date of the 15th day of **October**, 19 **64**
I have retraced the **Utah-Arizona State Boundary** between mile post 126 and
the **S. 1/4** section corner of section 8, and between mile post 122 and the
closing corner of **Township 44 South, Range 1 East and 1 West**, and survey
a portion of the west boundary, (**Salt Lake Meridian**), and a portion of the
subdivision, of **Township 44 South, Range 1 East**
of the **Salt Lake Meridian**, in the State of **Utah**, which
are represented in the foregoing field notes as having been executed by me and under my direction
and that said survey has been made in strict conformity with said special instructions, the Manual
of Instructions for the Survey of the Public Lands of the United States, and in specific manner
described in the foregoing field notes.

January 8, 1965
(Date)

Glen B. Hatch
(Cadastral Surveyor)

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

SUBMITTED FOR APPROVAL
Date NOV 29 1965

BUREAU OF LAND MANAGEMENT,
Washington, D. C.

The foregoing field notes of the retracement of the **Utah-Arizona State Boundary**
between mile post 126 and the **S. 1/4** section corner of section 8, and between
mile post 122 and the closing corner of **Township 44 South, Ranges 1 East**
1 West, and the survey of a portion of the west boundary (**Salt Lake Meridian**)
and a portion of the subdivision, of **Township 44 South, Range 1 East**
executed by **Glen B. Hatch, Cadastral Surveyor**
having been critically examined and found correct, are hereby approved.

FEB 8 1966
(Date)

E. J. Livingston
(Chief, Division of Engineering)

CERTIFICATE OF TRANSCRIPT

I CERTIFY That the foregoing transcript of the field notes of the above-described surveys in
Utah, is a true copy of the original field notes.

(Date)

(Chief, Division of Engineering)

Blank

Page

Blank

Page

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

401

FIELD NOTES

OF THE

DEPENDENT RESURVEY

OF

A PORTION OF THE NORTH BOUNDARY

AND

A PORTION OF THE SUBDIVISION

AND

THE SURVEY

OF

A PORTION OF THE SUBDIVISION OF SECTION 3

TOWNSHIP 3 SOUTH, RANGE 22 EAST

Of the SALT LAKE Meridian,

in the State of UTAH

EXECUTED BY

GERALD W. HOCHSTRASSER

CADASTRAL SURVEYOR

Under special instructions dated JANUARY 29, 19 65, which provided for the surveys

included under Group Number 479, approved JANUARY 29, 1965,

and assignment instructions dated JANUARY 29, 19 65.

Survey commenced FEBRUARY 23, 19 65

Survey completed MARCH 12, 19 65

402
DEPT. OF THE INTERIOR
BUR OF LAND MGMT

1966 APR 11 AM 10 00 .0

RECEIVED
STATE & LAND OFFICE
SALT LAKE CITY, UTAH

INDEX DIAGRAM

Township 3 S., Range 22 E.

2					
6	5	4	6	3	2
			8		
			7		
			11		
			10		
			9		
			4		
7	8	9	10	11	12
13	14	15	16	17	18
19	20	21	22	23	24
25	26	27	28	29	30
31	32	33	34	35	36

Township 3 South, Range 22 East

CHAINS

The north boundary of the township was surveyed by Jessen and Harmston in 1900, and a portion of this line retraced and resurveyed by Howard W. Miller in 1911. The entire north boundary was retraced and a portion resurveyed by J. C. Clark in 1935. The east boundary was surveyed by A. D. Ferron in 1878, and resurveyed by Jessen and Harmston in 1900. The west boundary was surveyed by Jessen and Harmston in 1900, and a portion of this boundary resurveyed by Howard W. Miller in 1911. The south boundary was surveyed by Jessen and Harmston in 1900. A portion of the subdivisional lines were surveyed by Harmston in 1906. The remainder were surveyed by Howard W. Miller in 1911, who also retraced a portion of the subdivisional lines that had been previously surveyed. The following field notes are those of the dependent resurvey of a portion of the north boundary, a portion of the subdivisional lines and the survey of a portion of the subdivision of section lines of section 3, Township 3 South, Range 22 East.

The survey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1947, and special instructions dated January 29, 1965.

Before restoring the corners, the lines of the original survey were retraced and diligent search made for any evidence of the original corners, bearing trees, or other calls of the original field note record.

The rules of proportionate measurement were applied to ascertain the position of the lost corners, but not until exhausting every reasonable possibility of finding direct evidence for the control of each particular corner.

All lines of this survey were run by direct method where the lines were accessible; lines inaccessible were run by triangulation or traverse methods. Distances to topography on lines run by traverse or triangulation methods are approximately as scaled from U. S. G. S. topographic sheets. The details of such triangulations or traverses have been thoroughly checked and verified and in order to simplify the record, the diagrams and reductions are omitted from these field notes.

The direction of the lines of this survey were determined by angulation from the azimuth between triangulation stations "Ress" and "Sandy". The lines were carried forward by sustained angulation.

The geographic position for the southeast corner of section 3, is at latitude $40^{\circ}34'50.6''$ N. and longitude $109^{\circ}25'18.7''$ W., which is the mean of section line ties to U. S. G. S. triangulation station "Ress-1", at latitude $40^{\circ}35'43.036''$ N. and longitude $109^{\circ}27'34.428''$ W., located N. $43^{\circ}15'12''$ W., 113.48 chs. dist. from the corner of sections 3, 4, 9 and 10, and U. S. C. and G. S. triangulation station "Sandy", at latitude $40^{\circ}35'10.601''$ N. and longitude $109^{\circ}27'25.908''$ W., located N. $64^{\circ}06'00''$ W., 75.37 chs. dist. from the corner of sections 3, 4, 9 and 10.

The magnetic declination was read at several stations throughout section 3, and the average of these readings was found to be 16° East.

Dependent Resurvey of a Portion of the N. Bdy., T. 3 S., R. 22 E.

CHAINS

Dependent Resurvey of a Portion of the N. Bdy., T. 3 S., R. 22 E.

Reestablishment of the Resurvey Executed by J. C. Clark in 1935

Beginning at the cor. of secs. 2, 3, 34 and 35, on the N. bdy. of the Tp., monumented with an iron post, 2 ins. diam., set and mkd. as described in the official record of the 1935 resurvey.

N. 89°00' W., along the N. bdy. of sec. 3.

Over rolling and broken land through scattered to medium dense juniper timber and medium dense undergrowth. By triangulation, desc. about 90 ft. over W. slope.

6.80 Draw, drains S.; asc. about 90 ft. over E. slope.

15.40 Top of steep ascent, bears N. and S.; asc. about 10 ft. over gentle E. slope.

26.40 Spur, slopes S. about 10.00 chs. to end; desc. about 10 ft. over gentle W. slope.

29.00 Wash, drains S.; asc. about 40 ft. over E. slope.

32.70 Sandstone spur, slopes S. End triangulation; desc. 20 ft. over W. slope.

37.00 Leave timber and undergrowth, bears N. and S.; enter reseeded area.

40.055 Point for the S. $\frac{1}{2}$ sec. cor. of sec. 34, T. 2 S., R. 22 E. at proportionate dist. All evidence of this cor. established in 1935 has been destroyed by reseeding project.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T2S R22E

$\frac{1}{2}$ S34

1965

No accessories available.

41.575 Point for the N. $\frac{1}{2}$ sec. cor. of sec. 3 at proportionate dist. All evidence of this cor. established in 1935 has been destroyed by reseeding project.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

$\frac{1}{2}$ S3

T3S R22E

1965

No accessories available.

Thence by triangulation, desc. about 70 ft. over W. slope.

42.00 Leave reseeded area, bears N. and S.; enter scattered juniper timber and undergrowth.

47.00 Wash, drains S.; asc. about 140 ft. over E. slope.

Dependent Resurvey of a Portion of the N. Bdy., T. 3 S., R. 22 E.

CHAINS

- 55.70 Sandstone spur, slopes S.; desc. about 30 ft. over W. slope.
- 60.70 Wash, in bottom of draw, drains SE.; asc. about 60 ft. over SE. slope.
- 71.40 Spur, slopes S.; desc. gradually over SW. slope.
- 74.30 Wash, drains S.; asc. gradually over W. slope.
- 80.11 The cor. of secs. 33 and 34, T. 2 S., R. 22 E., monumented with an iron post, 2 ins. diam., set and mkd. as described in the official record of the 1935 resurvey. End triangulation.
- 83.15 The closing cor. of secs. 3 and 4, monumented with an iron post, 3 ins. diam., set and mkd. as described in the official record of the 1935 resurvey.

Land, rolling and broken.
 Soil, rocky clay loam.
 Timber, scattered to medium dense juniper.
 Undergrowth, sagebrush, black brush, service berry and grass.

Dependent Resurvey of a Portion of the Subdivision,
 T. 3 S., R. 22 E.

Reestablishment of the Survey Executed by E. F. Harmston
 in 1906.

The cor. of secs. 2, 3, 10 and 11, monumented with a limestone, 19x9x4 ins., firmly set and plainly mkd. 5 notches on S. and 2 on E. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T3S R22E

S3 S2

S10 S11

1965

Bury original stone cor. alongside iron post, and set a steel fence post, 3 ft. long, alongside iron post.

Thence,

N. 0°21' W., bet. secs. 2 and 3.

Over rolling land through scattered juniper timber and sagebrush undergrowth. Asc. 20 ft. along E. slope of spur.

- 3.50 Ridge, bears E. and W.; desc. 140 ft. over NW. slope.
- 10.70 Draw, drains S. 65° W.; asc. 160 ft. over S. slope.
- 16.90 Ridge, bears N. 80° E. and S. 80° W.; desc. 70 ft. over NW. slope.

Dependent Resurvey of a Portion of the Subdivision, T. 9 S., R. 3 E.

CHAINS 19.88	<p>Point for the south 1/16 sec. cor. of secs. 2 and 3 at mid point bet. the cor. of secs. 2, 3, 10 and 11 and 1/2 sec. cor. of secs. 2 and 3.</p> <p>Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T3S R22E S1/16 S3 S2 1965</p> <p>Set a steel fence post alongside iron post.</p>
31.60	Gravel road, bears N. 42° E. and S. 42° W.
33.70	Wash, 120 lks. wide, 10 ft. deep, drains S. 60° W.; asc. 20 ft. over SW. slope.
39.76	<p>Point for the 1/2 sec. cor. of secs. 2 and 3 at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T3S R22E 1/2 S3 S2 1965</p> <p>Set a steel fence post alongside iron post.</p> <p>Asc. 110 ft. over SW. slope.</p>
69.50	Draw, 30 ft. deep drains W.; thence along W. slope.
70.43	<p>The cor. of secs. 2, 3, 34 and 35, on the N. bdy. of the Tp., hereinbefore described.</p> <p>Land, rolling. Soil, rocky clay loam. Timber, scattered juniper. Undergrowth, scattered sagebrush.</p> <hr/> <p>From the cor. of secs. 2, 3, 10 and 11.</p> <p>S. 88°24' W., bet. secs. 3 and 10.</p> <p>Over rolling land through scattered juniper timber and sagebrush undergrowth. Asc. 20 ft. over E. slope.</p> <p>0.75 Spur, slopes S.; desc. 135 ft. over W. slope.</p> <p>16.80 Draw, 20 ft. deep, drains S. 10° W.</p> <p>20.22 Point for the east 1/16 sec. cor. of secs. 3 and 10 at mid point bet. the cor. of secs. 2, 3, 10 and 11, and the 1/2 sec. cor. of secs. 3 and 10.</p> <p>Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p>

Dependent Resurvey of a Portion of the Subdivision, T. 3 S., R. 22 E.

CHAINS

T3S R22E.

E 1/16 $\frac{S3}{S10}$

1965

- 22.57 Fence, barb wire, bears about N. 45° W., and S. 45° E.
- 35.90 Road, bears about N. 70° W., and S. 70° E.; enter cultivated land.
- 40.44 Point for the 1/4 sec. cor. of secs. 3 and 10 at proportionate dist. falls in cultivated land; there is no remaining evidence of the original cor.

Bury a sandstone rock, 14x8x4 ins., mkd. "X", 16 ins. in the ground.

from which

A power pole, bears N. 77°39' W., 2.78 chs. dist., blazed on S. face.

The northeast cor. of a ranch house, bears N. 59°36'30" W., 16.36 chs. dist.

A gauging station, bears N. 49°31' W.

Continue over cultivated land.

- 42.17 Transmission line, 2 wire, bears N. 56°30' W. and S. 56°30' E.
- 46.10 Fence, bears NW. and SE.
- 46.20 Brush Creek, with stream of water, flows SE.; asc. 15 ft. along N. slope.
- 54.75 Irrigation ditch, flows SE. from about N. 70° W. curving N. 10° W.; asc. 45 ft. over steep E. slope. Leave cultivated land.
- 60.66 Point for the west 1/16 sec. cor. of secs. 3 and 10 at midpoint bet. the 1/4 sec. cor. of secs. 3 and 10, and the cor. of secs. 3, 4, 9 and 10.

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.

T3S R22E

W 1/16 $\frac{S3}{S10}$

1965

- Set a steel fence post alongside iron post.
- Thence by triangulation over rolling land.
- 77.90 Gravel road, bears N. 80° E. and S. 80° W.
- 80.88 The cor. of secs. 3, 4, 9 and 10, monumented with an iron post, 2 ins. diam., set and mkd. as described in the official record of the 1911 survey.

from which

Dependent Resurvey of a Portion of the Subdivision of T₃S., R. 2

CHAINS

U. S. G. S. triangulation station "Ress", bears N. 43°15'12" W., 113.48 chs. dist.

A brass tablet, on high knoll, mkd. RAT 24, bears N. 46°41'10" W., 38.81 chs. dist.

U. S. C. and G. S. triangulation station "Sandy", bears N. 64°06'00" W., 75.37 chs. dist.

Land, rolling E. portion; mountainous W. portion.
Soil, clay loam.
Timber, scattered juniper.
Undergrowth, sagebrush.

Reestablishment of the Retracement Executed by H. W. Miller in 1911.

N. 2°59' W., bet. secs. 3 and 4.

Over mountainous land through scattered juniper timber and sagebrush undergrowth.

- 2.00 Wash, 120 lks. wide, 20 ft. deep, drains E.; asc. 65 ft. over S. slope.
- 11.80 Spur, slopes E.; desc. 50 ft. over N. slope.
- 15.70 Draw, drains E.; asc. 35 ft. over S. slope.
- 21.55 Spur, slopes E.; desc. 5 ft. over gentle N. slope.
- 23.32 Point for the south 1/16 sec. cor. of sec. 3 only, at mid point bet. the cor. of secs. 3, 4, 9 and 10 and the W. 1/4 sec. cor. of sec. 3.

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.

T3S
R22E
S1/16

S3

1965

Set a steel fence post alongside iron post.

Desc. gradually over gentle N. slope.

- 30.00 Small draw, 20 ft. deep, drains E.
- 36.30 Top of ledge, about 50 ft. high, bears NW. and SE.; desc. abruptly over NE. slope.
- 41.30 Brush, Creek, flows SE.
- 43.39 Point for the E. 1/4 sec. cor. of sec. 4 at proportionate dist.

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.

Dependent Resurvey of a Portion of the Subdivision, T. 3 S., R. 22 E.

CHAINS

T3S

R22E

 $\frac{1}{4}$

S4

1965

Set a steel fence post alongside iron post.

- 43.90 Base of ledge, bears NW. and SE.; asc. abruptly 50 ft. over ledge.
- 46.55 Top of ledge, bears NW. and SE.
- 46.64 The $\frac{1}{4}$ sec. cor. of secs. 3 and 4, marked by an "X" and $\frac{1}{4}$ on solid sandstone. This cor. will now function as the W. $\frac{1}{4}$ sec. cor. of sec. 3 only.

from which the original bearing trees

A fallen and dead juniper, 16 ins. diam., is SE. of the cor., mkd. $\frac{1}{4}$ S 3 BT.

A juniper, 6 ins. diam., bears West, 31 lks. dist., mkd. $\frac{1}{4}$ S4BT. (Record is S. $60\frac{1}{2}^\circ$ W., 30 lks.). I destroy the markings on this tree.

At the cor. point

Drill an iron post, 18 ins. long, 1 in. diam., 12 ins. in solid sandstone, with brass cap mkd.

T3S

R22E

 $\frac{1}{4}$

S3

1965

N, $0^\circ44'$ W., beginning new measurement.

By triangulation, asc. about 250 ft. over steep S. slope.

- 20.90 Top of steep ascent, bears E. and W. End triangulation; asc. 45 ft. over gentle SE. slope.

- 27.57 The closing cor. of secs. 3 and 4, on the N. bdy. of the Tp., hereinbefore described.

Land, mountainous.
Soil, rocky clay loam.
Timber, scattered juniper.
Undergrowth, sagebrush.

Survey of a Portion of the Subdivision of Sec. 3,
T. 3 S., R. 22 E.

From the $\frac{1}{4}$ sec. cor. of secs. 3 and 10.

N. $1^\circ15'$ W., along the north and south center line of sec. 3.

Over cultivated land.

Survey of a Portion of the Subdivision of Sec. 3, T. 3 S., R. 22

CHAINS	
3.20	Dirt road, bears NW. and SE.
12.19	Gravel road, bears nearly E. and W. Leave cultivated land. Asc. 80 ft. over broken S. slope. Enter scattered timber and undergrowth.
21.57	<p>Point for the center south 1/16 sec. cor. at mid point bet. the 1/4 sec. cor. of secs. 3 and 10, and the C 1/2 sec. cor. of sec. 3.</p> <p>Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T3S R22E</p> <p>C</p> <p>S1/16 S3</p> <p>C</p> <p>1965</p> </div> <p>Set a steel fence post alongside iron post.</p> <p>Asc. 65 ft. over S. slope.</p>
26.80	Top of steep ascent, slopes E.; asc. 20 ft. along E. slope.
43.14	<p>Intersect the east and west center line of sec. 3.</p> <p>Point for the center 1/4 sec. cor. of sec. 3.</p> <p>Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T3S R22E</p> <p>C 1/2 S3</p> <p>1965</p> </div> <p>Set a steel fence post alongside iron post.</p> <p>Thence by triangulation, continue along E. slope.</p>
59.00	Draw, about 70 ft. deep, drains SE. curving S.
72.24	<p>Intersect the N. 1/4 sec. cor. of sec, 3, hereinbefore described. End triangulation.</p> <p>Land, mountainous.</p> <p>Soil, rocky clay loam.</p> <p>Timber, scattered juniper.</p> <p>Undergrowth, sagebrush.</p>
	<p>From the 1/4 sec. cor. of secs. 2 and 3.</p> <p>N. 86°49' W., along the east and west center line of sec. 3.</p> <p>Over rolling land through scattered juniper and sagebrush undergrowth.</p>
1.80	Wash, 15 lks. wide, 4 ft. deep, drains S.
6.70	Small draw, 2.00 chs. wide, 20 ft. deep, drains S.; asc. 70 ft. over E. slope.

Survey of a Portion of the Subdivision of Sec. 3, T. 3 S., R. 2 E.

CHAINS	
7.50	Enter reseeded area.
15.10	Low ridge, bears N. and S.; desc. 35 ft. over W. slope.
20.59	Point for the center east 1/16 sec. cor. of sec. 3 at mid point bet. the $\frac{1}{2}$ sec. cor. of secs. 2 and 3, and the center $\frac{1}{2}$ sec. cor. of sec. 3. Point not monumented. Desc. 70 ft. over W. slope.
36.20	Wash, 50 lks. wide, in draw, drains S. 10° E.; asc. 45 ft. over E. slope.
41.18	Intersect the north and south center line of sec. 3, at the center $\frac{1}{2}$ sec. cor., hereinbefore described. Asc. 45 ft. over E. slope.
44.20	Ridge, bears N. and S.; desc. 70 ft. over NW. slope.
53.30	Draw, drains SW.; asc. 15 ft. over SE. slope.
58.20	Spur, slopes SW.; desc. 70 ft. over W. slope.
61.74	Wash, 20 lks. wide, 10 ft. deep, in bottom of draw, drains S. 10° E.; asc. 10 ft. over E. slope.
62.14	Point for the center west 1/16 sec. cor. of sec. 3 at mid point bet. the center $\frac{1}{2}$ sec. cor. and the W $\frac{1}{2}$ sec. cor. of sec. 3. Point not monumented. Asc. 95 ft. over E. slope.
67.30	S. edge of saddle on ridge, bears N. 20° E. and S. 10° W.; desc. 45 ft. over NW. slope.
72.70	Draw, drains S.; asc. 30 ft. over SE. slope.
77.40	Spur, slopes S.; desc. 45 ft. over SW. slope.
83.10	Intersect the W. bdy. of sec. 3 at the W. $\frac{1}{2}$ sec. cor. of sec. 3, hereinbefore described. Land, rolling. Soil, clay loam. Timbers, scattered juniper. Undergrowth, sagebrush.
	From the east 1/16 sec. cor. of secs. 3 and 10. N. 0°49' W., along the north and south center line of the southeast $\frac{1}{2}$ of sec. 3. Over rolling land through scattered juniper timber and sagebrush undergrowth.
0.60	Small draw, drains SW.
1.50	Small spur, slopes SW.; desc. 50 ft. over NW. slope.
3.50	Draw, drains SW.; asc. 120 ft. over S. slope.
9.51	New drift fence, on ridge, bears about N. 59° E. and extends S. 59° W., 12 lks. to end, desc. 100 ft. over steep N. slope.
15.57	Gravel road, bears about N. 60° E. and S. 60° W.
18.90	Wash, 100 lks. wide, 10 ft. deep, drains about S. 60° W.; asc gentle SW. slope.

Survey of a Portion of the Subdivision of Sec. 3, T. 3 S., R. 2

CHAINS
20.73

Intersect the east and west center line of the southeast $\frac{1}{4}$ Point for the southeast 1/16 sec. cor. of sec. 3.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap. mkd.

T3S R22E

SE1/16 S3

1965

Set a steel fence post alongside iron post.

Enter reseeding area.

22.05

Wash, 100 lks. wide, 20 ft. deep, drains about S. 80° W.; asc. 105 ft. over S. slope.

41.46

Intersect the east and west center line of sec. 3, at the point for the center east 1/16 sec. cor., hereinbefore described.

From the south 1/16 sec. cor. of secs. 2 and 3.

N. $89^\circ 14'$ W., along the east and west center line of the southeast $\frac{1}{4}$ of sec. 3.

Over rolling land through scattered juniper timber and sagebrush undergrowth. Desc. 65 ft. along N. slope.

13.96

Gravel road, bears about NE. and SW.

15.75

Wash, 100 lks. wide, 10 ft. deep, drains about S. 80° W.; desc. 15 ft. along S. slope.

20.39

Intersect the north and south center line of the southeast $\frac{1}{4}$ at the southeast 1/16 sec. cor. of sec. 3, hereinbefore described.

Desc. 10 ft. along S. slope.

24.00

Wash, 100 lks. wide, 20 ft. deep, drains about S. 80° W.

27.35

Trail road, bears N. and S.

31.95

Draw, with small stream of water, flows S. about 1.00 ch, thence SW.; asc. 65 ft. over broken SE. slope.

39.95

Top of ascent on S. side of clay knoll; desc. 25 ft. over SW. slope.

40.78

Intersect the north and south center line of sec. 3 at the center south 1/16 sec. cor., hereinbefore described.

From the west 1/16 sec. cor. of secs. 3 and 10.

N. $2^\circ 07'$ W., along the north and south center line of the southwest $\frac{1}{4}$ sec. 3.

Over rolling land through sagebrush undergrowth. Desc. 35 ft. along E. slope.

2.50

Bottom of descent, bears NW. and SE., thence over nearly level land.

6.67

Fence, bears about E. and W.

Survey of a Portion of the Subdivision of Sec. 3, T. 3 S., R. 22 E.

<p>7.03</p> <p>7.25</p> <p>9.65</p> <p>10.41</p> <p>11.80</p> <p>13.00</p> <p>17.90</p> <p>19.30</p> <p>22.47</p> <p>23.25</p> <p>26.63</p> <p>42.25</p> <p>44.94</p>	<p>Gravel road, bears E. and W.</p> <p>Fence, bears E. and W.; enter farm land.</p> <p>Steel granary on line.</p> <p>Fence, bears about S. 80° W. and N. 80° E.; 10 lks. to corral.</p> <p>Fence, bears about N. 60° W. and S. 60° E., 12 lks. to corral.</p> <p>Enter tall sagebrush.</p> <p>Trail road, bears NW. and SE.</p> <p>Brush Creek, flows SE. from NE.</p> <p>Intersect the east and west center line of the southwest ¼ of sec. 3.</p> <p>Point for the southwest 1/16 sec. cor.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T3S R22E</p> <p style="text-align: center;">SW1/16 S3</p> <p style="text-align: center;">1965</p> <p>Brush Cr. flows east from S. 70° W.; asc. 115 ft. over S. slope.</p> <p>Fence, bears about E. and W.</p> <p>Top of sandstone ledge, bears NW. and SE.; desc. abruptly 50 ft. over NE. slope.</p> <p>Intersect the east and west center line of sec. 3 at the point for the center west 1/16 sec. cor., hereinbefore described.</p> <hr/> <p>From the center south 1/16 sec. cor. of sec. 3.</p> <p>N. 89°11' W., along the east and west center line of the southwest ¼ sec. 3.</p> <p>Over rolling land through scattered juniper timber and sagebrush undergrowth.</p> <p>Small draw, drains SE.; asc. 25 ft. over E. slope.</p> <p>Spur, slopes SW.; thence along broken S. slope.</p> <p>Point of spur, slopes S.; desc. 100 ft. over SW. slope.</p> <p>Top of ledge, bears NW. and SE.</p> <p>Brush Creek, flows SW. from NW.</p> <p>Intersect the north and south center line of the southwest ¼ of sec. 3 at the southwest 1/16 sec. cor., hereinbefore described.</p> <p>Brush Creek, flows N. 70° E. from NW.</p>
---	---

Survey of a Portion of the Subdivision of Sec. 3, T. 3 S., R. 2 E.

CHAINS	Trail road, bears NW. and SE.	25.95
	Leave bottom land; asc. 130 ft. over E. slope.	30.60
	Intersect the west bdy. of sec. 3, at the south cor., hereinbefore described.	41.14

General Description

Section 3 of Township 3 South, Range 22 East is rolling to mountainous land covered with scattered juniper timber and sagebrush undergrowth. The soil is clay loam along Brush Creek, and rocky clay loam in the higher elevations. The area is drained in a southerly direction by Brush Creek and other washes and draws. There is good stream of water in Brush Creek and a small stream in one side canyon of Brush Creek. No other water was noted. There is a ranch in the southeast $\frac{1}{4}$ of the southwest $\frac{1}{4}$. No other habitation in the section. There is a good gravel road entering the section 8.00 chs. south of the $\frac{1}{4}$ sec. cor. of secs. 2 and 3, bearing southwesterly through the section, leaving 3.00 chs. east of the cor. of secs. 3, 4, 9 and 10, and a trail road along Brush Creek. The elevation of sec. 3 is about 6,000 ft. above sea level.

CERTIFICATE OF SURVEY

I, Gerald W. Hochstrasser, HEREBY CERTIFY upon honor that,
 in pursuance of special instructions bearing date of the 29th day of January, 19 65,
 I have dependently resurveyed a portion of the north boundary and a portion
 of the subdivisional lines and surveyed a portion of the subdivision of
 sec. 3, T. 3 S., R. 22 E.,

of the Salt Lake Meridian, in the State of Utah, which
 are represented in the foregoing field notes as having been executed by me and under my direction;
 and that said survey has been made in strict conformity with said special instructions, the Manual
 of Instructions for the Survey of the Public Lands of the United States, and in specific manner
 described in the foregoing field notes.

December 9, 1965

(Date)


 (Cadastral Surveyor)

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

SUBMITTED FOR APPROVAL
 Date JAN 31 1966

BUREAU OF LAND MANAGEMENT,
 Washington, D. C.


The foregoing field notes of the dependent resurvey of a portion of the north
 boundary and a portion of the subdivisional lines and survey of a portion
 of the subdivision of sec. 3, T. 3 S., R. 22 E., S. L. Mer., Utah.

executed by Gerald W. Hochstrasser

having been critically examined and found correct, are hereby approved.

MAR 21 1966

(Date)

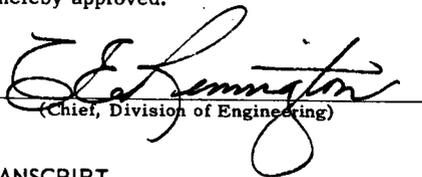
 (Chief, Division of Engineering)

CERTIFICATE OF TRANSCRIPT

~~I CERTIFY That the foregoing transcript of the field notes of the above-described surveys in
 T. 3 S., R. 22 E., S.L. Mer., Utah, is a true copy of the original field notes.~~

~~(Date)~~

~~(Chief, Division of Engineering)~~

Blank

Page

Blank

Page

4-679
(January 1963)

R576

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

419

FIELD NOTES

OF THE

REMONUMENTATION OF CORNERS

IN

TOWNSHIP 2 NORTH, RANGE 11 EAST

TOWNSHIP 2 NORTH, RANGE 12 EAST

TOWNSHIP 2 NORTH, RANGE 13 EAST

TOWNSHIP 3 NORTH, RANGE 10 EAST

TOWNSHIP 3 NORTH, RANGE 12 EAST, WITH MILE

CORNERS NOS. 341, 342, and 343, on THE

UTAH-WYOMING STATE LINE

TOWNSHIP 3 NORTH, RANGE 13 EAST, WITH

MILE CORNERS NOS. 335 and 339 ON UTAH-

WYOMING STATE LINE.

Of the SALT LAKE Meridian,

In the State of UTAH

EXECUTED BY

Andrew Nelson

Cadastral Surveyor

Under special instructions dated February 15, 19 61, which provided for the surveys
included under Group Number 447, approved February 16, 1961,
and assignment instructions dated July 16, 1965.

Survey commenced July 20, 19 65

Survey completed August 13, 19 65

60 200
6 1965

DEPT. OF THE INTERIOR
BUR OF LAND MGMT

1966 MAY 11 PM 1 24 9

RECEIVED
STATE & LAND OFFICE
SALT LAKE CITY, UTAH


INDEX DIAGRAM

Township _____, Range _____,

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

CORNER REMONUMENTATION INDEX DIAGRAM

Township 2 North -----, Range 11 East , S. L. Meridian

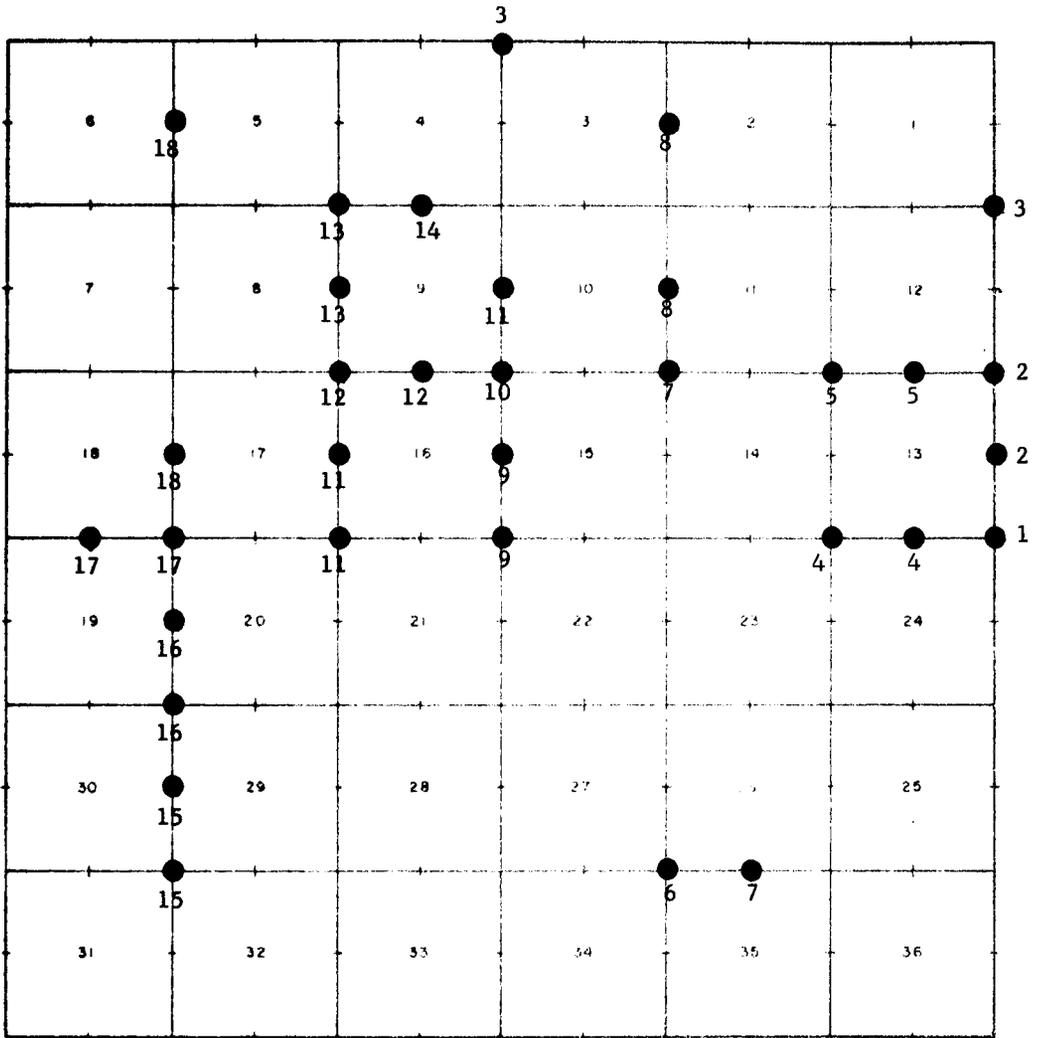


Blank

Page

CORNER REMONUMENTATION INDEX DIAGRAM

Township 2 North, Range 12 East, S. L. Meridian

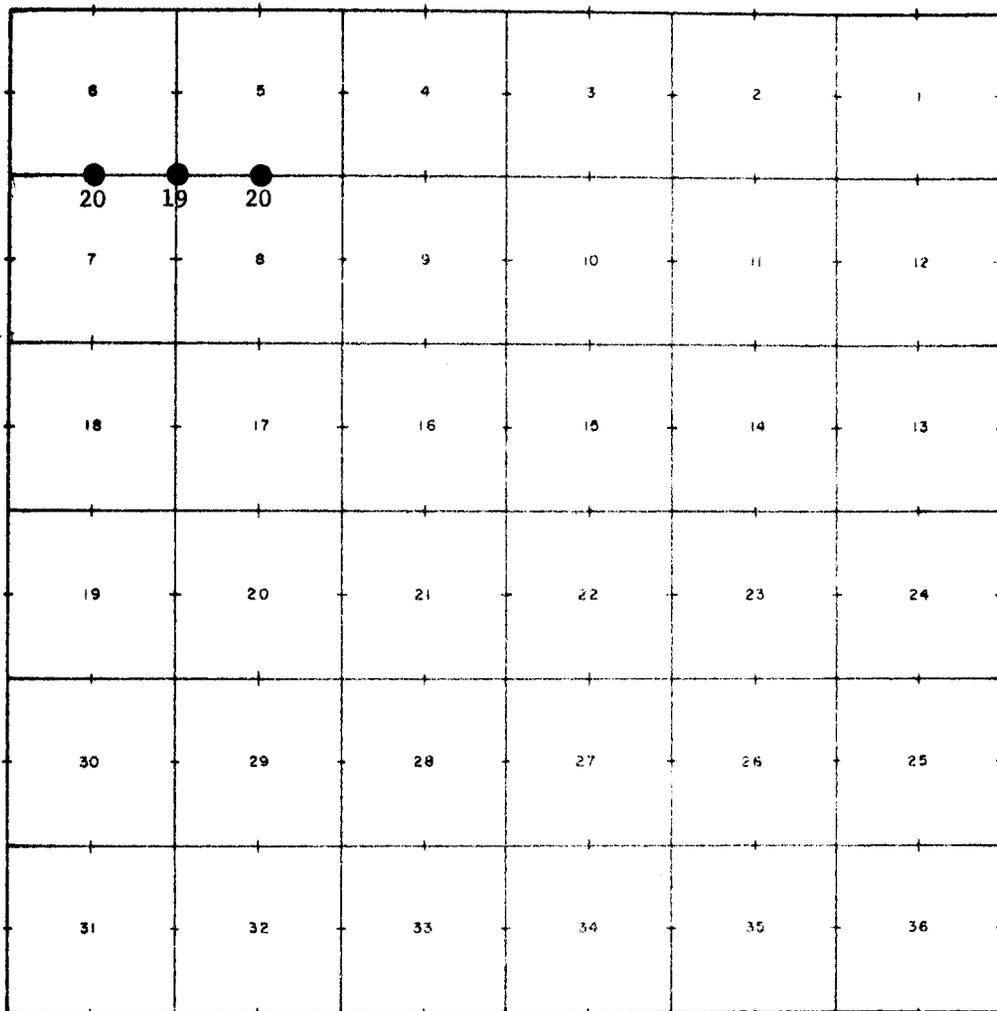


Blank

Page

CORNER REMONUMENTATION
INDEX DIAGRAM

Township 3 North Range 10 East S. L. Meridian

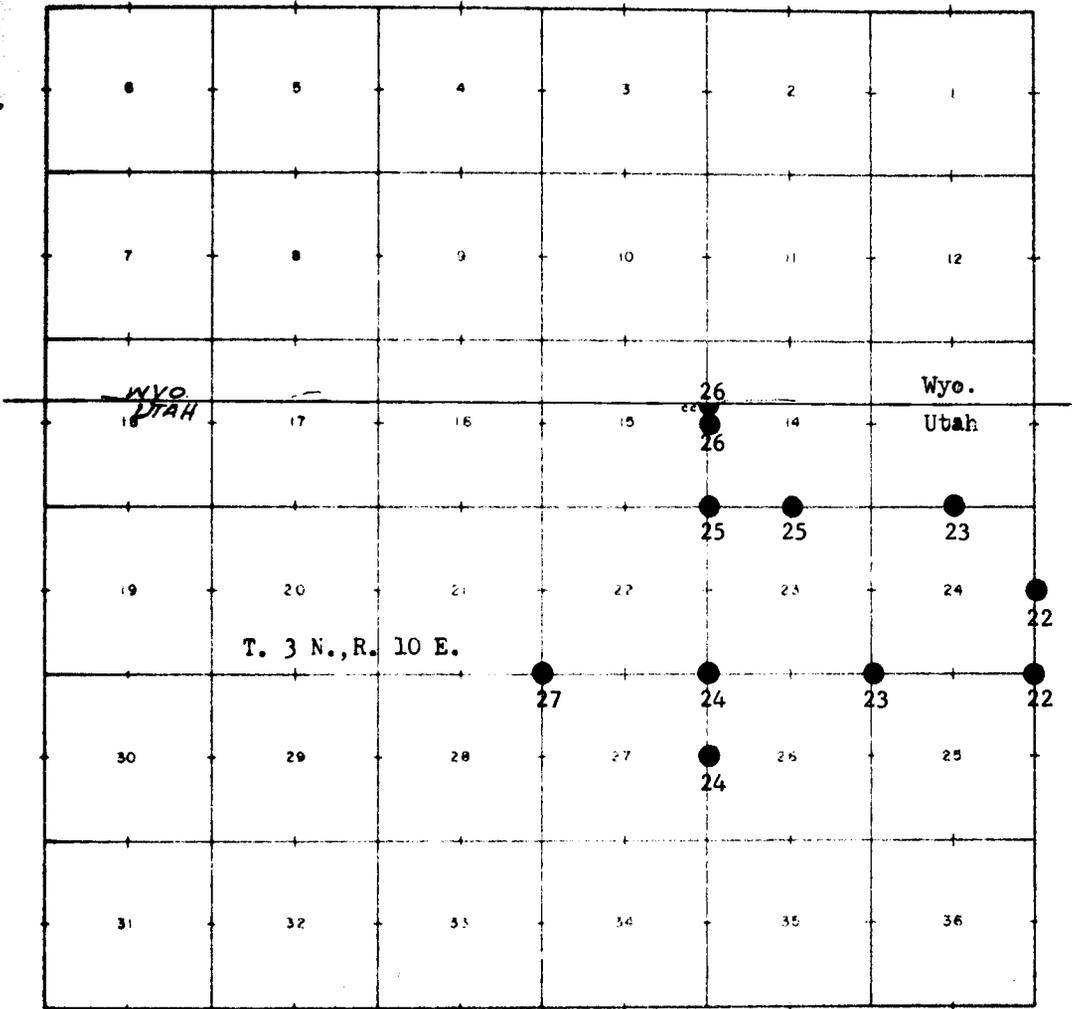


Blank

Page

CORNER REMONUMENTATION INDEX DIAGRAM

Township 3 North, Range 12 East, Salt Lake Meridian

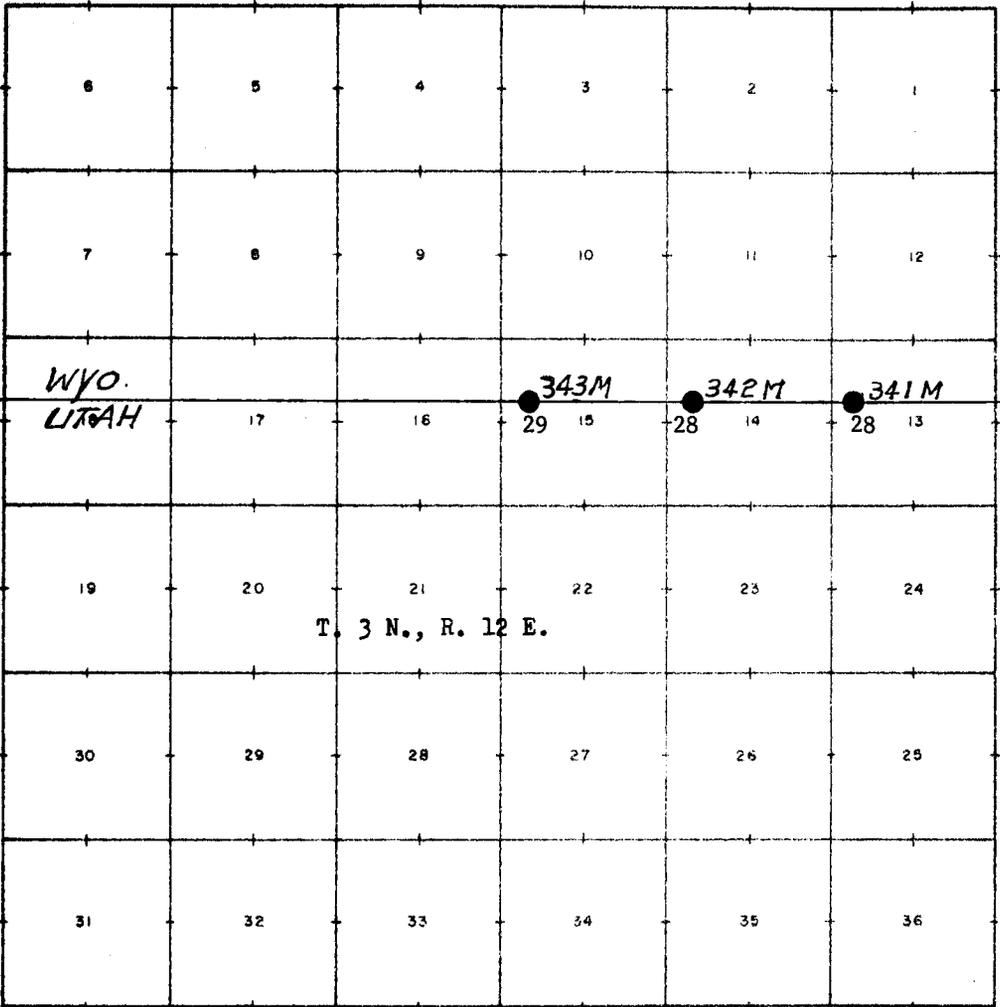


Blank

Page

CORNER REMONUMENTATION INDEX DIAGRAM

Township 3 North Range 13 East Salt Lake Meridian

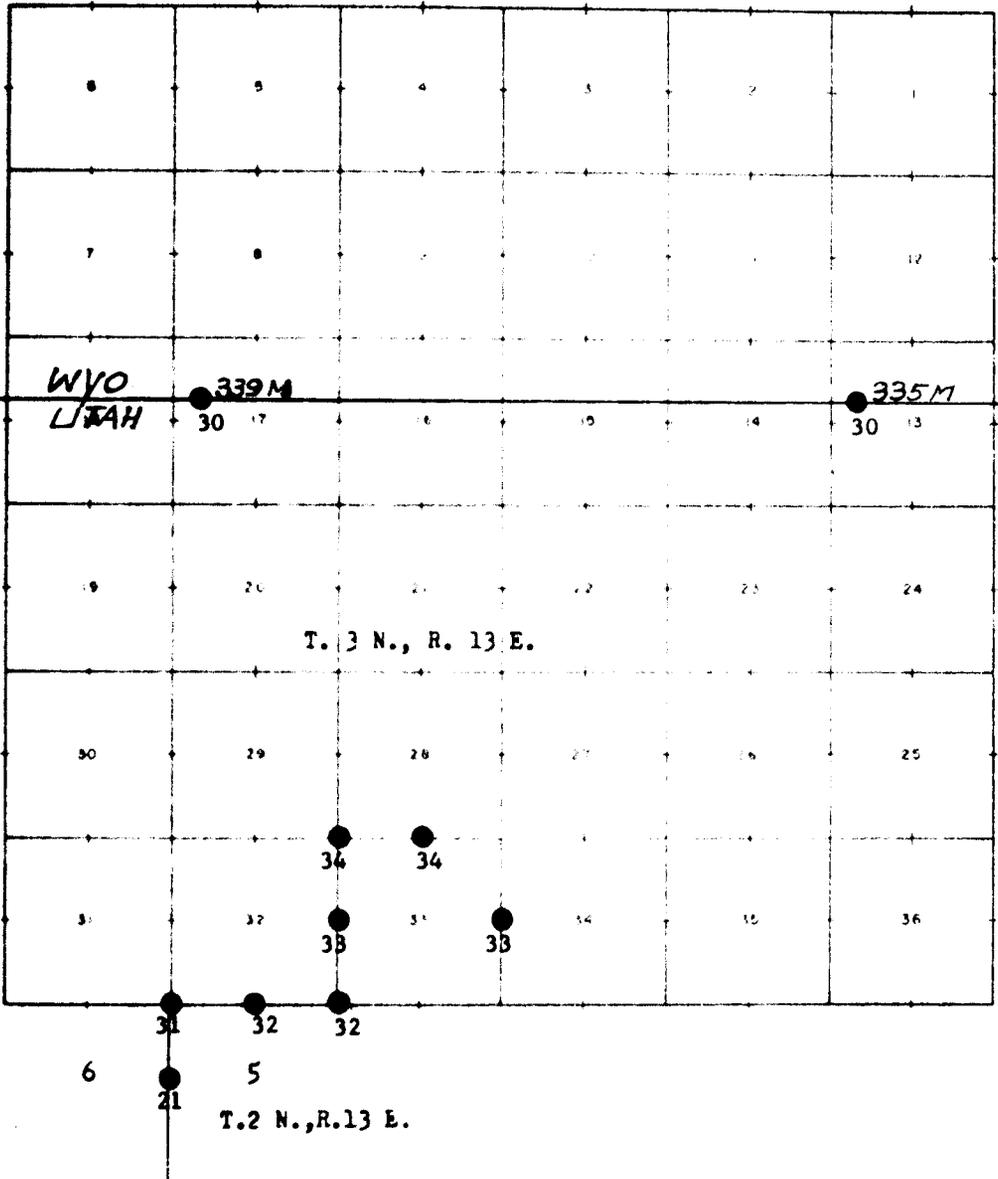

Blank

Page

Remonumentation of Corners in T. 2 N., R. 11 E., S.L. Mer.

CHAINS

The following field notes are those of the remonumentation of certain identified original corners selected by the U. S. Forest Service as being adjacent to or controlling the boundaries of Forest Service Lands, located in the WASATCH NATIONAL FOREST, in the following townships:

- T. 2 N., R. 11 E., Salt Lake Meridian.
- T. 2 N., R. 12 E.,
- T. 2 N., R. 13 E.,
- T. 3 N., R. 10 E.,
- T. 3 N., R. 12 E., with Mile Corners Nos. 341, 342, and 343, on State Line.
- T. 3 N., R. 13 E., with Mile Corners Nos. 335, and 339, on State Line.

The position of each corner was marked by the original monument or determined from corner accessories recorded in the survey record. The monumentation was requested by and accomplished in cooperation with the Forest Service.

T. 2 N., R. 11 E.

Township 2 North, Range 11 East, Salt Lake Meridian, is located within the Wasatch National Forest: the S., E., and N. boundaries, and the subdivisions were surveyed by Bailey & Burrill, in 1875; the W. boundary was surveyed by Julien Bausman in 1873, and resurveyed by Gentry & McConkie, in 1942.

At the cor. of secs. 13, 18, 19, and 24, on E. bdy. of Tp., marked by a quartzite stone, 15x14x8 ins., firmly set in ground and in small circle of rock, no mks. could be identified; from which orig. bearing trees:

- A pine, 11 ins. diam., bears N. 65° E., 10 lks. dist., mkd. S18 BT (record N. 44° E., 8 lks.)
- A pine, 16 ins. diam., bears S. 45° E., 10 lks. dist., mkd. S19 BT (record S. 46° E., 8 lks.)
- A dead pine, 9 ins. diam., bears S. 80° W., 11 lks. dist., mkd. S24 BT (record S. 42° W., 8 lks.)
- A fallen pine, 10 ins. diam., bears N. 30° W., 10 lks. dist., no mks., too rotted. (record N. 45° W., 8 lks.)

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with orig. stone on W. side, and surrounded by a mound of stone; brass cap mkd.

T2N	
R11E	R12E
S13	S18
S24	S19

1965

from which I mark

- A pine, 5 ins. diam., bears N. 58° E., 22 lks. dist., mkd. S18 BT
- A pine, 15 ins. diam., bears S. 73° E., 28½ lks. dist., mkd. T2N R12E S19 BT
- A pine, 12 ins. diam., bears S. 53° W., 40 lks. dist., mkd. T2N R11E S24 BT

Remonumentation of Corners in T. 2 N., R. 11 E., S.L. Mer.

CHAINS

A pine, 11 ins. diam., bears N. 33° W., 43 lks. dist., mkd. T2N R11E S13 BT

Cor. is located on steep NW. slope in dense pine timber, about 12 chs. E. of S. end of open park.

At the $\frac{1}{2}$ sec. cor. of secs. 13 and 18, on E. bdy. of Tp., marked by a quartzite stone, 14x8x8 ins., firmly set, mkd. $\frac{1}{2}$ on W. face, small mound of stone on the W.; from which orig. bearing tree:

A dead pine, 18 ins. diam., bears N. 80° E., 135 lks. dist., mks. partly overgrown, BT visible. (record, East, 120 lks.)

At cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, orig. stone buried on E. side; surrounded by a large mound of stone; brass cap mkd.

T2N
R11E R12E
 $\frac{1}{2}$
S13 | S18
1965

from which I mark

A pine, 11 ins. diam., bears N. 77° E., 170 $\frac{1}{2}$ lks. dist., mkd. $\frac{1}{2}$ S18 BT

Ruins of old log cabin, bears about S. 25° E., 1 $\frac{1}{2}$ chs. dist.

Cor. is located on slight NW. slope in open park, about 4 chs. N. of timber, and about $\frac{1}{2}$ mile E. of the W. Fork of Blacks Fork River.

At the cor. of secs. 7, 12, 13, and 18, on E. bdy. of Tp., marked by a quartzite stone, 15x10x8 ins., firmly set in ground, mkd. 4 notches on S. and 2 notches on N. edge; witnessed by small circle of rock.

At cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, orig. stone buried on W. side; brass cap mkd.

T2N
R11E R12E
S12 | S7
S13 | S18
1965

Raise a large mound of stone around cor.

Cor. is located on slight SE. slope in open park, about 1 $\frac{1}{2}$ chs. dist. N. of small spring branch, draining NE. for about 2 chs. into W. Fork of Blacks Fork River.

Remonumentation of Corners in T. 2 N., R. 11 E.

CHAINS

At the cor. of secs. 1, 6, 7, and 12, on E. bdy. of Tp., marked by a quartzite stone, 18x14x11 ins., mkd. 5 notches on S. and 1 notch on N. edge, firmly set; from which orig. bearing trees:

- A pine, 14 ins. diam., bears N. 65° E., 26 lks. dist., mks. are overgrown. (record N. 50° E., 20 lks.)
- A pine, 14 ins. diam., bears S. 39° E., $78\frac{1}{2}$ lks. dist., mkd. S7 BT, partly overgrown (record S. 40° E., 72 lks.)
- A pine, 18 ins. diam., bears S. 88° W., 44 lks. dist., shows dim scribe mks. (record S. 80° W., 40 lks.)
- A dead pine, 18 ins. diam., bears N. 20° W., 60 lks. dist., only mks. visible S1 BT (record N. 20° W., 50 lks.)

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, orig. cor. buried on W. side, and in collar of rock; brass cap mkd.

T2N	
R11E	R12E
S1	S6
S12	S7

1965

from which I mark

- A pine, 14 ins. diam., bears N. 23° E., 40 lks. dist., mkd. T2N R12E S6 BT
- A pine, 11 ins. diam., bears N. 72° W., 105 lks. dist., mkd. T2N R11E S1 BT

Raise a mound of stone, W. of cor.

Corner is located on a gradual E. slope, at W. edge of meadow, and about 6 chs. W. of small creek, drains S.; also about 8 chs. W. of a main dirt road, bearing N. and SE.

At the cor. of secs. 3, 4, 33, and 34, on the N. bdy. of Tp., marked by a sandstone, 12x11x6 ins., firmly set in ground, mkd. 3 grooves on W. and 3 notches on E. side; from which

- A sawed pine stump, 15 ins. diam., bears N. 45° E., 3 lks. dist., trunk on the ground, properly mkd. T3N R11E S34 BT

The other 3 orig. bearing trees have all been cut down, found stumps in approximate proper positions.

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, orig. stone buried on S. side; brass cap mkd.

Remonumentation of Corners in T. 2 N., R. 11 E.

CHAINS

T3N R11E

S33 | S34

S4 | S3

1965

from which I mark

A pine, 5 ins. diam., bears N. 32° E., 35 lks. dist.,
mkd. S34 BT

A pine, 7 ins. diam., bears S. 82° E., 12 lks.
dist., mkd. T2N R11E S3 BT

A pine, 12 ins. diam., bears S. 72° W., 96 lks.
dist., mkd. T2N R11E S4 BT

A balsam, 12 ins. diam., bears N. 62° W., 25
lks. dist., mkd. S33 BT

Raise a mound of stone, SW. of cor.

Corner is located on a gradual S. slope, in scattered
timber, and old logged area; old log trail bearing NE.
and SW. is W. of cor. about $1\frac{1}{2}$ chs. dist.

At the cor. of secs. 13, 14, 23, and 24, marked by a
quartzite stone, 12x12x7 ins., properly mkd. (record
calls for pine post) and firmly set in ground, and in
small mound of stone; from which

N. 65° E., 6.50 chs. dist., found burned remains of
a 24 in. pine tree, no mks. (this agrees with
record)

There is no evidence of the NW. bearing tree.

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins.
in the ground, mkd. stone buried on W. side, and in a
mound of stone; brass cap mkd.

T2N R11E

S14 | S13

S23 | S24

1965

from which I mark

A pine, 12 ins. diam., bears N. 47° E., 3.90 chs.
dist., mkd. T2N R11E S13 BT

A pine, 10 ins. diam., bears N. 79° W., 5.92 chs.
dist., mkd. T2N R11E S14 BT

Corner is located in flat, open park, about 6 chs. E.,
and 10 chs. S. of edge of timber; a road bearing NE. and
SW., bears W. of cor. 2.30 chs. dist.

At the $\frac{1}{4}$ cor. of secs. 13 and 24, marked by partially
decayed pine post, 3 ins. diam., $2\frac{1}{2}$ ft. long, sharpened
on one end, no mks. remaining, found set in a small
mound of stone; no other accessories.

Remonumentation of Corners in T. 2 N., R. 11 E.

CHAINS

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, wood post set alongside; brass cap mkd.

T2N R11E
 $\frac{S13}{S24}$

1965

from which I mark

A pine, 5 ins. diam., bears S. 42° W., 202 lks. dist., mkd. $\frac{1}{2}$ S24 BT

A pine, 14 ins. diam., bears N. 30° W., 406 lks. dist., mkd. $\frac{1}{2}$ S13 BT

Raise a mound of stone around cor.

Corner is located on S. edge of small, open bench, in short sagebrush, about 4 chs. N. of the W. fork of Blacks Fork River.

At the cor. of secs. 11, 12, 13, and 14, marked by a coarse granite stone, 22x12x3 ins., firmly set, mkd. 4 notches on S. and 1 groove on E. side. The only evidence remaining of the 4 orig. bearing trees are the stumps of the NE., SW., and NW. trees, found in approximate proper positions.

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, orig. stone buried on E. side; brass cap mkd.

T2N R11E
 $\frac{S11 | S12}{S14 | S13}$

1965

from which I mark

A pine, 10 ins. diam., bears N. 30° E., 53 lks. dist., mkd. T2N R11E S12 BT

A pine, 6 ins. diam., bears S. 7° E., 45 lks. dist., mkd. S13 BT

A spruce, 10 ins. diam., bears S. 85° W., 68 lks. dist., mkd. T2N R11E S14 BT

A pine, 14 ins. diam., bears N. 15° W., 64 lks. dist., mkd. T2N R11E S11 BT

Corner is located on gentle SE. slope at NW. edge of small swampy meadow; medium dense timber surrounds meadow.

At the $\frac{1}{2}$ sec. cor. of secs. 12 and 13, marked by a hard granite stone, 20x13x6 ins., firmly set, no mks. could be identified; from which remains of orig. bearing trees:

Remonumentation of Corners in T. 2 N., R. 11 E.

CHAINS

A pine stump, 30 ins. diam., bears N. 45° E.,
24 lks. dist., mkd. $\frac{1}{4}$ (record N. 20° E.,
30 lks.)

A pine stump, 30 ins. diam., 5 ft. high, bears
S. 36° W., 66 lks. dist., mkd. $\frac{1}{4}$ BT (record
S. 35° W., 64 lks.)

At cor. point -

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins.
in the ground, orig. stone buried on S. side; brass cap
mkd.

T2N R11E

$\frac{1}{4}$ $\frac{S12}{S13}$

1965

from which I mark

A pine, 14 ins. diam., bears N. 14° E., 39 lks.
dist., mkd. $\frac{1}{4}$ S12 BT

A pine, 16 ins. diam., bears S. 25° W., 42 lks.
dist., mkd. $\frac{1}{4}$ S13 BT

Raise a large mound of stone, NW. of cor.

Corner is located on a gradual SE. slope in very scattered
timber; large open park to S. and E.; a small pond about
2 chs. in diam., bears about S. 80° E., 8 chs. dist.

At the cor. of secs. 26, 27, 34 and 35, marked by a
sandstone, 18x13x8 ins., firmly set, mkd. 1 notch on S.
and 2 notches on E. edge; from which orig. bearing trees:

A dead balsam, 9 ins. diam., bears S. 75° E., 12 lks.
dist., dim scribe mks. visible, blaze nearly
overgrown (record SE., 10 lks.)

A spruce, 16 ins. diam., bears N. 16° E., 33 lks.
dist., mks. overgrown (record N. 20° E., 35 lks.)

Base of fallen pine, 14 ins. diam., bears S. 80° W.,
22 lks. dist., dim scribe mks. found (record
SW., 35 lks.)

No remaining evidence of NW. bearing tree.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins.
in the ground, orig. stone buried on N. side; brass cap
mkd.

T2N R11E

$\frac{S27}{S34} \frac{S26}{S35}$

1965

from which I mark

A pine, 8 ins. diam., bears N. 67° E., 14½ lks.
dist., mkd. T2N R11E S26 BT

A pine, 6 ins. diam., bears S. 50° E., 26 lks.
dist., mkd. S35 BT

Remonumentation of Corners in T. 2 N., R. 11 E.

CHAINS

A pine, 16 ins. diam., bears S. 80° W., 65 lks. dist., mkd. T2N R11E S34 BT
 A spruce, 14 ins. diam., bears N. 26° W., 109 lks. dist., mkd. T2N R11E S27 BT

Raise a mound of stone around cor.

Corner of steep, rocky E. slope in dense timber; about 25 chs. W. of the W. fork of Blacks Fork River.

At the $\frac{1}{4}$ sec. cor. of secs. 26 and 35, marked by a sandstone, 20x10x6 ins., firmly set in ground and in a mound of stone; mkd. $\frac{1}{4}$ on N. face; from which

A pine, 17 ins. diam., bears S. 45° E., 20 lks. dist., blaze partly overgrown, scribe mks. visible. (record S. 20° E., 33 lks.)

Stump hole at base of rotted pine, bears N. 40° E., 30 lks. dist.; no mks. remaining (record N. 40° E., 35 lks.)

At cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, orig. stone buried on S. side; brass cap mkd.

T2N R11E

$\frac{1}{4}$ $\frac{S26}{S35}$

1965

from which I mark

A pine, 6 ins. diam., bears S. 70° E., 21 $\frac{1}{2}$ lks. dist., mkd. $\frac{1}{4}$ S35 BT

A pine, 10 ins. diam., bears N. 40° W., 43 lks. dist., mkd. $\frac{1}{4}$ S26 BT

Corner is located on a gradual SW. slope, in medium dense timber; E. 10 lks. dist. from small stream flowing nearly W., from NE.; about 10 chs. E. of old road along E. side of river.

At the cor. of secs. 10, 11, 14, and 15, which is reestablished (corner stone missing) from the remaining evidence of 3 of the orig. bearing trees; from reestablished cor. point:

Stump-hole with pine roots showing, bears N. 45° E., 16 lks. dist.; (the record)

Base of 16 in. fallen pine, bears S. 45° W., 45 lks. dist.; trunk shows 2 distinct blazes, mks. weathered off.

Base of 14 in. fallen pine, bears N. 60° W., 22 lks. dist., trunk rotted, no mks. remaining.

There is no remaining evidence of the SE. bearing tree.

At cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground; brass cap mkd.

Remonumentation of Corners in T. 2 N., R. 11 E.

CHAINS

T2N	R11E
S10	S11
S15	S14

1965

from which I mark

- A pine, 10 ins. diam., bears N. 60° E., 59 lks.
dist., mkd. T2N R11E S11 BT
- A pine, 8 ins. diam., bears S. 41° E., 29 lks.
dist., mkd. T2N R11 E S14 BT
- A pine, 8 ins. diam., bears S. 75° W., 41 lks.
dist., mkd. T2N R11E S15 BT
- A pine, 8 ins. diam., bears N. 32° W., 58 lks.
dist., mkd. T2N R11E S10 BT

Raise a mound of stone around cor.

Corner is located on a very steep, rocky E. slope in dense timber; about 2½ chs. E. of unimproved road on top of E. edge of high, divide ridge, bearing nearly N. & S.

At the ¼ sec. cor. of secs. 10 and 11, which is re-established (cor. stone missing) from orig. bearing trees:

from reestablished cor. point

- A pine, 15 ins. diam., bears N. 35° E., 12 lks.
dist., mkd. ¼ S BT
- A pine, 9 ins. diam., bears N. 45° W., 40 lks.
dist., open blaze and find scribe mks.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a mound of stone; brass cap mkd.

¼	
T2N	R11E
S10	S11

1965

from which I mark

- A pine, 7 ins. diam., bears N. 15° E., 50 lks.
dist., mkd. ¼ S11 BT
- A pine, 9 ins. diam., bears N. 28° W., 38 lks.
dist., mkd. ¼ S10 BT

Corner is located on a medium steep W. slope, at W. edge of recent burn area; about 4 chs. W. of the W. edge of ridge top, and about 5 chs. E. of logging road.

At the ¼ sec. cor. of secs. 2 and 3, marked by a sandstone, 14x9x5 ins., lying on ground, plainly mkd. ¼; from which

- A pine, 15 ins. diam., bears S. 24° E., 30 lks.
dist., mkd. ¼ S BT
- A rotted pine stump, bears S. 72° W., 20 lks.
dist.

Remonumentation of Corners in T. 2 N., R. 11 E.

CHAINS

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a mound of stone; brass cap mkd.

½
T2N | R11E
S3 | S2
1965

from which I mark

A pine, 7 ins. diam., bears N. 76° E., 79 lks.
dist., mkd. ½ S2 BT

A pine, 22 ins. diam., bears N. 14° W., 26 lks.
dist., mkd. ½ S3 BT

Corner is located on a gradual SW. slope, in scattered timber and logged area; about 4½ chs. N. of a main graded road, bearing NW. and SE.

At the cor. of secs. 15, 16, 21, and 22, marked by a sandstone, 17x11x3 ins., firmly set, mkd. with 3 notches on S. and E. edges; from which

A spruce, 24 ins. diam., bears N. 5° W., 88 lks.
dist., mks. overgrown (record N. 70° W., 70 lks.)

A spruce, 24 ins. diam., bears S. 17° E., 168 lks.
dist., mks. overgrown (record S. 20° E., 160 lks.)

No evidence of the SW. bearing tree.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground to rock, and in a large mound of stone, orig. stone buried alongside; brass cap mkd.

T2N R11E
S16 | S15
S21 | S22
1965

from which I mark

A pine, 12 ins. diam., bears S. 2° W., 142 lks.
dist., mkd. T2N R11E S21 BT

A spruce, 5 ins. diam., bears N. 72° W., 45 lks.
dist., mkd. S16 BT

Corner is located in open park on nearly level ground, few widely scattered trees.

At the ½ sec. cor. of secs. 15 and 16, marked by a sandstone, 13x10x10 ins., firmly set, mkd. ½ on W. face; from which

A pine, 28 ins. diam., bears N. 80° E., 33 lks.
dist., mks. overgrown (record East, 35 lks.)

Remonumentation of Corners in T. 2 N., R. 11 E.

CHAINS

A pine, 24 ins. diam., bears N. 65° W., 9 lks. dist., mkd. BT; other mks. overgrown (record N. 45° W., 8 lks.)

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground and in large mound of stone, orig. stone buried alongside; brass cap mkd.

$\frac{1}{2}$
 T2N | R11E
 S16 | S15
 1965

from which I mark

A pine, 10 ins. diam., bears N. 55° E., 35 lks. dist., mkd. $\frac{1}{2}$ S15 BT

A pine, 13 ins. diam., bears S. 60° W., 16 lks. dist., mkd. $\frac{1}{2}$ S16 BT

Corner is located on gradual NW. slope in medium dense timber.

At the cor. of secs. 9, 10, 15, and 16, marked by a sandstone, 18x11x3 ins., mkd. with 4 grooves on S. and 3 grooves on E. face; stone was found out of place, had rolled down abrupt slope. Point for cor. reestablished from the 2 remaining orig. bearing trees; from re-established cor. point:

A pine, 18 ins. diam., bears S. 45° E., 50 lks. dist., scribe mks. visible, partially overgrown.

A balsam, 12 ins. diam., bears S. 22° W., 25 lks. dist., scribe mks. visible, partially overgrown.

No remaining evidence of the other 2 bearing trees.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, orig. stone buried on E. side; brass cap mkd.

T2N R11E
 S 9 | S10
 S16 | S15
 1965

from which I mark

A pine, 10 ins. diam., bears N. 28° E., 44 lks. dist., mkd. T2N R11E S10 BT

A pine, 9 ins. diam., bears S. 15° W., 55 lks. dist., mkd. T2N R11E S16 BT

A pine, 14 ins. diam., bears N. 27° W., 46 lks. dist., mkd. T2N R11E S9 BT

Corner is located on an abrupt NW. slope, in medium dense timber.

Remonumentation of Corners in T. 2 N., R. 11 E.

CHAINS

At the $\frac{1}{4}$ sec. cor. of secs. 9 and 10, marked by a granite stone, 20x16x10 ins., mkd. $\frac{1}{4}$ on W. face, and set in a small mound of stone; from which

A pine, 9 ins. diam., bears East, 4 lks. dist.,
mkd. $\frac{1}{4}$ S BT

A pine stump, 14 ins. diam., bears S. 80° W.,
7 lks. dist., no mks.

At cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, orig. stone buried on E. side; brass cap mkd.

	$\frac{1}{4}$	
T2N	R11E	
S9	S10	

1965.

from which I mark

A pine, 8 ins. diam., bears S. 10° E., 23 lks. dist., mkd, $\frac{1}{4}$ S10 BT

A pine, 7 ins. diam., bears S. 66° W., 50 lks. dist., mkd. $\frac{1}{4}$ S9 BT

Corner is located on a gradual W. slope, in medium dense timber; old logged area.

At the cor. of secs. 16, 17, 20, and 21, marked by a trachyte stone, 19x12x10 ins., firmly set, mkd. with 3 notches on S. and 4 grooves on E. side; witnessed by a small mound of stone.

At cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, orig. stone buried on E. side; brass cap mkd.

T2N	R11E	
S17	S16	
S20	S21	

1965

from which I mark

A pine, 7 ins. diam., bears N. 20° E., 113 lks. dist., mkd. S16 BT

A pine, 6 ins. diam., bears S. 50° W., 85 lks. dist., mkd. T2N R11E S20 BT

A pine, 6 ins. diam., bears N. 69° W., 133 lks. dist., mkd. S17 BT

Raise a mound of stone around cor.

Corner is located in slight SE. slope in open park; few widely scattered small pines; on top of mountain.

At the $\frac{1}{4}$ sec. cor. of secs. 16 and 17, marked by a broken trachyte stone, 16x12x6 ins., mkd. $\frac{1}{4}$ on W. face, set in a small mound of stone; from which

Remonumentation of Corners in T. 2 N., R. 11 E.

CHAINS

A pine, 13 ins. diam., bears S. 45° W., 5 lks. dist., partial overgrowth, scribe mks. visible.
A dead pine, 14 ins. diam., bears N. 88° E., 19 lks. dist., dim scribe mks. visible.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to solid rock, orig. stone alongside and supported in a mound of stone to top; brass cap mkd.

½
T2N|R11E
S17|S16
1965

from which I mark

A pine, 10 ins. diam., bears S. 48° E., 25 lks. dist., mkd. ½ S16 BT
A pine, 12 ins. diam., bears N. 25° W., 20 lks. dist., mkd. ½ S17 BT

Corner is located on steep NW. slope in dense timber.

At the cor. of secs. 8, 9, 16, and 17, marked by a sandstone, 14x11x8 ins., firmly set, mkd. 4 notches on S. and E. edges; from which

Base of fallen pine, properly mkd., bears S. 25° E., 27 lks. dist. (record S.60° E., 30 lks.)
A pine, 18 ins. diam., bears S. 27° W., 54 lks. dist., scribe mks. visible, partly overgrown, (record S. 15° W., 50 lks.)
A pine, 16 ins. diam., bears N. 79° W., 23 lks. dist., scribe mks. visible, partly overgrown, (record N. 82° W., 20 lks.)

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, orig. stone buried on S. side; brass cap mkd.

T2N R11E
S 8 | S 9
S17 | S16
1965

from which I mark

A pine, 7 ins. diam., bears N. 50° E., 34 lks. dist., mkd. T2N R11E S9 BT
A pine, 8 ins. diam., bears S. 18° E., 36 lks. dist., mkd. T2N R11E S16 BT

Corner is located on medium steep W. slope in dense timber.

At the ½ sec. cor. of secs. 9 and 16, marked by the stump-hole at base of fallen pine tree cor., 14 ins. diam., plainly mkd. ½ S.; from which

Re monumentation of Corners in T. 2 N., R. 11 E.

CHAINS

A pine, 11 ins. diam., bears S. 40° E., 10 lks.
dist., mkd. $\frac{1}{2}$ S BT (record S. 45° E., 10 lks.)

No trace of the other bearing tree.

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins.
in the ground, and surrounded by a mound of stone; brass
cap mkd.

T2N R11E
 $\frac{1}{2}$ $\frac{S\ 9}{S16}$
1965

from which I mark

A pine, 18 ins. diam., bears S. 15° E., 33 lks.
dist., mkd. $\frac{1}{2}$ S16 BT

A pine, 12 ins. diam., bears N. 17° W., 33 lks.
dist., mkd. $\frac{1}{2}$ S9 BT

Corner is located on a gradual E. slope, in dense timber;
in old logged area.

At the $\frac{1}{2}$ sec. cor. of secs. 8 and 9, marked by a sand-
stone 13x9x5 ins., firmly set, mkd. $\frac{1}{2}$ on W. face; from
which

A pine, 7 ins. diam., bears N. 70° W., 4 lks.
dist., mkd. $\frac{1}{2}$ S BT (record S. 45° W., 4 lks.)

A pine, 12 ins. diam., bears N. 75° E., 9 lks.
dist., scribe mks. visible; nearly overgrown
(record N. 60° E., 10 lks.)

At cor. point

Set an iron post; 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins.
in the ground, and in a mound of stone, orig. stone
buried on W. side; brass cap mkd.

$\frac{1}{2}$
T2N R11E
S 8 | S 9
1965

from which I mark

A pine, 12 ins. diam., bears N. 67° E., 24 lks.
dist., mkd. $\frac{1}{2}$ S9 BT

A pine, 6 ins. diam., bears N. 88° W., 11 lks.
dist., mkd. $\frac{1}{2}$ S8 BT

Corner is located on a gradual NW. slope, about 4 chs.
N. of flat spur, sloping W.; in dense timber; area E. of
cor. has been logged.

At the cor. of secs. 4, 5, 8, and 9, reestablished
(corner stone missing) from orig. bearing tree; from re-
established cor. point

Remonumentation of Corners in T. 2 N., R. 11 E.

CHAINS

A pine, 12 ins. diam., bears S. 20° E., 10 lks.
dist., mkd. T2N R11E BT on W. face.

No other bearing trees recorded.

At cor. point

Set an iron post, 30 ins. long, 14 ins. in the ground to
rock, and supported in a large mound of stone; brass cap
mkd.

T2N R11E	
S 5	S 4
S 8	S 9
1965	

from which I mark

- A balsam, 8 ins. diam., bears N. 67° E., 43 lks.
dist., mkd. T2N R11E S4 BT
- A pine, 8 ins. diam., bears S. 2° E., 74 lks.
dist., mkd. T2N R11E S9 BT
- A pine, 10 ins. diam., bears S. 77° W., 60½ lks.
dist., mkd. T2N R11E S8 BT
- A pine, 4 ins. diam., bears N. 21° W., 18½ lks.
dist., mkd. S5 BT

Corner is located on flat ground, at W. base of steep W.
slope; ridge bears E. about 5 chs. dist.; logged area to
E. of cor.

At the ¼ sec. cor. of secs. 4 and 9, reestablished from
orig. NW. bearing tree (corner stone missing) from re-
established cor. point

A pine, 12 ins. diam., bears N. 50° W., 50 lks.
dist., mkd. ¼ S BT

No evidence of the other orig. bearing tree.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins.
in the ground, over broken glass, and in a mound of stone;
brass cap mkd.

T2N R11E	
¼ S 4	
¼ S 9	
1965	

from which I mark

- A pine, 9 ins. diam., bears N. 5° E., 54 lks.
dist., mkd. ¼ S4 BT
- A pine, 15 ins. diam., bears S. 13° E., 19 lks.
dist., mkd. ¼ S9 BT

Corner is located on a steep, rocky E. slope, about 2 chs.
W. of McKinsie Creek draining NW.; log road along E. side
of creek.

Remonumentation of Corners in T. 2 N., R.11 E.

CHAINS

At the cor. of secs. 29, 30, 31, and 32, marked by a quartzite stone, 11x11x7 ins., firmly set, mkd. 1 notch on S. and 5 notches on E. edge; from which

A balsam, 17 ins. diam., bears N. 60° E., 27 lks. dist., mks. overgrown.

A dead pine, 28 ins. diam., bears S. 70° E., 27 lks. dist., mkd. S32 BT

A pine, 14 ins. diam., bears S. 62° E., 30 lks. dist., mks. nearly overgrown.

A triple pine, 18 ins. diam., bears N. 27° W., 33 lks. dist., mkd. only BT

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground to rock, orig. cor. buried on W. side, and in a mound of stone; brass cap mkd.

T2N R11E	
S30	S29
S31	S32

1965

from which I mark

A pine, 16 ins. diam., bears N. 75° E., 50 lks. dist., mkd. T2N R11E S29 BT

A spruce, 11 ins. diam., bears S. 42° E., 27 lks. dist., mkd. T2N R11E S32 BT

A pine, 9 ins. diam., bears S. 54° W., 49 lks. dist., mkd. T2N R11E S31 BT

A pine, 8 ins. diam., bears N. 52° W., 40 lks. dist., mkd. T2N R11E S30 BT

Corner is located on a gradual E. slope in dense clump of timber, about 1 ch. E. of a road, bearing nearly N. and S.; large open park to the E.

At the ¼ sec. cor. of secs. 29 and 30, marked by a sandstone, 17x12x4 ins., firmly set, marked ¼ on W. face; from which

A dead pine, 10 ins. diam., bears S. 9° E., 11 lks. dist., mkd. ¼ S BT

No evidence of the other orig. bearing tree; falls in windfall.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, orig. stone buried on E. side, and in a mound of stone; brass cap mkd.

¼	
T2N	R11E
S30	S29

1965

Remonumentation of Corners in T. 2 N., R. 11 E.

CHAINS

from which I mark

- A spruce, 6 ins. diam., bears S. 9° E., 119 lks. dist., mkd. $\frac{1}{4}$ S29 BT
- A pine, 12 ins. diam., bears S. 85° W., 143 lks. dist., mkd. $\frac{1}{4}$ S30 BT

Corner is located on a gradual E. slope, in scattered timber, dense timber about 2 chs. to the W.; a small pond, $\frac{1}{2}$ ch. in diam., bears S. 1.20 chs. dist.; small creek draining E. bears about S. 3 chs. dist.; and a road, bearing about S. and SE., bears E. of cor. 1 ch. dist.

At the cor. of secs. 19, 20, 29, and 30, marked by a sandstone, 16x10x10 ins., firmly set, mkd. 2 notches on S. and 5 notches on E. edge; from which

- A pine, 15 ins. diam., bears N. 71° E., 18 lks. dist., mks. partly overgrown.
- A dead pine, 14 ins. diam., bears S. 5° E., 32 lks. dist., mkd. S29 BT
- A pine, 15 ins. diam., bears S. 44° W., 25 lks. dist., mks. partly overgrown.
- A pine, 19 ins. diam., bears N. 60° W., 63 lks. dist., mks. overgrown.

At cor. point

Set an iron post, 30 ins. diam., $2\frac{1}{2}$ ins. diam., 12 ins. in the ground to rock, orig. stone set alongside, and in a mound of stone; brass cap mkd.

T2N R11E	
S19	S20
S30	S29

1965

from which I mark

- A pine, 12 ins. diam., bears N. 39° E., 49 lks. dist., mkd. T2N R11E S20 BT
- A pine, 12 ins. diam., bears S. 54° E., 24 lks. dist., mkd. T2N R11E S29 BT
- A pine, 8 ins. diam., bears S. 82° W., 35 lks. dist., mkd. T2N R11E S30 BT
- A pine, 8 ins. diam., bears N. 60° W., 63 lks. dist., mkd. T2N R11E S19 BT

Corner is located on W. slope, in medium dense timber; about 8 chs. dist. E. of Mill Creek.

At the $\frac{1}{4}$ sec. cor. of secs. 19 and 20, marked by a granite stone, 15x10x6 ins., firmly set, mkd. $\frac{1}{4}$ on W. face; from which

- A dead pine, 12 ins. diam., bears S. 25° W., 48 lks. dist., mkd. $\frac{1}{4}$ S BT
- A fallen pine, 14 ins. diam., base bears East, 16 lks. dist., mkd. $\frac{1}{4}$ S BT

At cor. point

Remonumentation of Corners in T. 2 N., R. 11 E.

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, orig. stone buried on W. side; brass cap mkd.

$\frac{1}{2}$
T2N | R11E
S19 | S20

1965

from which I mark

A pinon, 7 ins. diam., bears N. 87° E., 28 lks. dist., mkd. $\frac{1}{2}$ S20 BT

A pine, 7 ins. diam., bears S. 80° W., 24 lks. dist., mkd. $\frac{1}{2}$ S19 BT

Corner is located on medium steep W. slope, in timber; about 2 chs. E. of logging road, bearing nearly N. and S.

At the cor. of secs. 17, 18, 19 and 20, marked by a sandstone, 17x14x7 ins., firmly set, dimly mkd. 3 notches on S. and 5 notches on E. edge; from which

A fallen pine, 18 ins. diam., base bears S. 7° E., 53 lks. dist., dim scribe mks. visible.

A dead pine, 15 ins. diam., bears S. 57° W., 22 lks. dist., mkd. S19 BT

No evidence of the other 2 bearing trees.

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground to rock, and in a mound of stone; orig. stone buried alongside of post; brass cap mkd.

T2N R11E
S18 | S17
S19 | S20

1965

from which I mark

A pine, 6 ins. diam., bears N. 80° E., 51 lks. dist., mkd. S17 BT

A pine, 11 ins. diam., bears S. 51° E., 22 lks. dist., mkd. T2N R11E S20 BT

A pine, 12 ins. diam., bears S. 22° W., 32 lks. dist., mkd. S19 BT

A pine, 12 ins. diam., bears N. 78° W., $26\frac{1}{2}$ lks. dist., mkd. S18 BT

Corner is located on medium steep W. slope, in medium dense timber; logged area to N. and W.

At the $\frac{1}{2}$ sec. cor. of secs. 18 and 19, marked by a granite stone, 16x15x10 ins., firmly set, unable to identify any mks. but it is the only stone in area; from which

Remonumentation of Corners in T. 2 N., R. 11 E.

CHAINS

A pine, 18 ins. diam., bears N. 35° E., $20\frac{1}{2}$ lks. dist., mkd. $\frac{1}{4}$ SBT

A sawed pine stump, 10 ins. diam., bears S. 80° E., 30 lks. dist., no mks.

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, orig. stone buried on N. side; brass cap mkd.

T2N R11E

$\frac{1}{4}$ $\frac{S18}{S19}$

1965

from which I mark

A pinon, 7 ins. diam., bears N. 20° W., $41\frac{1}{2}$ lks. dist., mkd. $\frac{1}{4}$ S18 BT

A pinon, 7 ins. diam., bears S. 35° W., 52 lks. dist., mkd. $\frac{1}{4}$ S19 BT

Corner is located on slight E. slope, in medium dense timber; old logging road, bearing NE. and SW., bears S. of cor. about 1 ch. dist.

At the $\frac{1}{4}$ sec. cor. of secs. 17 and 18, marked by a sandstone, $16 \times 10 \times 8$ ins., firmly set, mkd. $\frac{1}{4}$ on W. face; from which

The base of fallen aspen, bears S. 45° W., 16 lks. dist., no mks. remaining.

An aspen stump, 12 ins. diam., bears N. 45° E., 23 lks. dist., no mks.

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, orig. stone buried on W. side; brass cap mkd.

$\frac{1}{4}$
T2N | R11E
S18 | S17

1965

from which I mark

A pine, 8 ins. diam., bears N. 81° E., 14 lks. dist., mkd. $\frac{1}{4}$ S17 BT

A pine, 12 ins. diam., bears N. 37° W., 43 lks. dist., mkd. $\frac{1}{4}$ S18 BT

Corner is located on a gradual NW. slope, in dense aspen, balsam and lodgepole pines; about 1 ch. S. of small ravine draining W.

At the $\frac{1}{4}$ sec. cor. of secs. 5 and 6, marked by a sandstone, $16 \times 11 \times 6$ ins., loosely set, mkd. $\frac{1}{4}$ on W. face; from which

Remonumentation of Corners in T. 2 N., R. 11 E.

CHAINS

The base of fallen pine, 12 ins. diam., bears S. 80° E., 18 lks. dist., trunk mkd. $\frac{1}{2}$ S.

A rotted pine stump, 3 ft. high, 12 ins. diam., mkd. BT., bears N. 70° W., 30 lks. dist.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, orig. stone buried on W. side; brass cap mkd.

$\frac{1}{2}$
T2N | R11E
S 6 | S 5

1965

from which I mark

A pine, 8 ins. diam., bears S. 34° E., 27½ lks. dist., mkd. $\frac{1}{2}$ S5 BT

A pine; 7 ins. diam., bears N. 15° W., 28 lks. dist., mkd. $\frac{1}{2}$ S6 BT

Corner is located on a gradual W. slope, in dense pine timber, 4 lks. W. of a net and barbed wire fence, bears N. and S.

T. 2 N., R. 12 E.

Township 2 North, Range 12 East, Salt Lake Mer.; the north boundary, and north 1 mile of the east boundary, was surveyed by T. C. Bailey, in 1875; the north and west portions of the subdivisions were surveyed by Bailey & Burrill, in 1875. In 1881, A. D. Ferron surveyed or resurveyed the S., E., and W. boundaries, and completed the subdivisions of the township.

At the cor. of secs. 5, 6, 7, and 8, marked by a coarse conglomerate stone, 14x14x6 ins., dimly mkd. with 5 notches on S. and E. edges, set in a mound of stone; from which

The base of fallen pine, 20 ins. diam., bears N. 20° E., 45 lks. dist., no mks. found.

A pine, 16 ins. diam., bears S. 48° E., 29 lks. dist., mks. nearly overgrown.

A dead pine, 12 ins. diam., bears S. 30° W., 30 lks. dist., mkd. S7 BT

No remaining evidence of the NW. bearing tree.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, orig. stone buried on N. side, and in a mound of stone; brass cap mkd.

T2N, R12E
S 6 | S 5
S 7 | S 8

1965

from which I mark

Remonumentation of Corners in T. 2 N., R. 12 E.

CHAINS

- A pine, 9 ins. diam., bears N. 56° E., $62\frac{1}{2}$ lks. dist., mkd. T2N R12E S5 BT
 A pine, 10 ins. diam., bears S. 42° E., 68 lks. dist., mkd. T2N R12E S8 BT
 A pine, 10 ins. diam., bears S. 76° W., 20 lks. dist., mkd. T2N R12E S7 BT
 A pine, 11 ins. diam., bears N. 39° W., 41 lks. dist., mkd. T2N R12E S6 BT

Corner is located on nearly level ground, about $\frac{1}{2}$ ch. E., and $1\frac{1}{2}$ chs. S. of edge of swamp, and 2 chs. SE. of small beaver pond.

At the $\frac{1}{4}$ sec. cor. of secs. 5 and 8, marked with a conglomerate sandstone, $12 \times 10 \times 3$ ins., set in a small mound of stone, dimly mkd. $\frac{1}{4}$ on N. face; from which

The base of fallen pine, 12 ins. diam., bears N. 50° W., 32 lks. dist., mkd. $\frac{1}{4}$ S BT

There is no remaining evidence of the other bearing tree.

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground to rock, and in a mound of stone, orig. stone set on N. side; brass cap mkd.

T2N R12E
 $\frac{1}{4} \frac{S 5}{S 8}$
 1965.

from which I mark

- A pine, 9 ins. diam., bears N. 60° E., 24 lks. dist., mkd. $\frac{1}{4}$ S5 BT
 A pine, 9 ins. diam., bears S. 82° E., 15 lks. dist., mkd. $\frac{1}{4}$ S8 BT

Raise a mound of stone, W. of cor.

Corner is located on top of E. end of low spur from the W., in scattered pine timber; the W. Fork of Blacks Fork River, is S. of cor. about 2 chs. dist.; a main road, is N. of cor. about 5 chs. dist.

At the $\frac{1}{4}$ sec. cor. of secs. 6 and 7, marked by a pine post, 7 ft. long, 7 ins. diam., mkd. $\frac{1}{4}$ on N. side, firmly set in ground and in mound of stone; no mkd. stone could be identified; there is no remaining evidence of the orig. bearing trees.

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, wood post set on SW. side of cor.; brass cap mkd.

T2N R12E
 $\frac{1}{4} \frac{S 6}{S 7}$
 1965

Remonumentation of Corners in T. 2 N., R. 12 E.

CHAINS

from which I mark

A pine, 12 ins. diam., bears S. 65° W., 67 lks.
dist., mkd. $\frac{1}{4}$ S7 BT

A pine, 10 ins. diam., bears N. 45° W., 45 lks.
dist., mkd. $\frac{1}{4}$ S6 BT

Corner is located on level ground, near SW. end of narrow open swampy park, draining NE., about $\frac{1}{2}$ ch. from W. edge, and $2\frac{1}{2}$ chs. from E. edge; scattered pine timber bordering park.

T. 2 N., R. 13 E.

Township 2 North, Range 13 East, Salt Lake Mer.; the N. bdy. was surveyed by A. D. Ferron in 1878; the S. and E. bdys., and the subdivisions were surveyed, and N. bdy. resurveyed by A. D. Ferron in 1881.

At the $\frac{1}{4}$ sec. cor. of secs. 5 and 6, marked by a mound of stone, unable to identify a mkd. stone; from which

A sawed pine stump, $2\frac{1}{2}$ ft. high, 13 ins. diam.,
mkd. BT, bears S. 88° W., 30 lks. dist. (record
N. 89° W., 35 lks.)

The base of fallen pine, 16 ins. diam., bears N.
 27° E., 37 lks. dist., shows old blaze nearly
overgrown.

A pine, 10 ins. diam., bears S. 4° W., 15 lks.
dist., mkd. with knife $\frac{1}{4}$ S6BT

At cor. point in center of mound of stone

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, and in a large mound of stone; brass cap mkd.

$\frac{1}{4}$
T2N|R13E
S 6|S 5
1965

from which I mark

A pine, 11 ins. diam., bears N. 34° E., 23 lks.
dist., mkd. $\frac{1}{4}$ S5 BT

A pine, 9 ins. diam., bears S. 24° W., 72 lks.
dist., mkd. $\frac{1}{4}$ S6 BT

Corner is located on a gradual E. slope in medium dense pine timber, about 6 chs. W. of Steel Creek, drains N.; cabin at old logging camp site, bears SE. about 3 chs. dist.

T. 3 N., R. 10 E.

Township 3 North, Range 10 East, Salt Lake Mer.; the E. and W. boundaries, and subdivisions were surveyed by Julien Bausman, in 1873; the N. tier of secs. 13 to 18, were resurveyed, and closings on the Utah-Wyoming State Line were made by Robert Gorlinski, in 1894.

Remonumentation of Corners in T. 3 N., R. 10 E.

CHAINS

At the cor. of secs. 19, 24, 25, and 30, on E. bdy. of Tp., marked by rotted stub of wood post found set in ground and in circle of stones; from which

- A balsam, 9 ins. diam., bears N. 51° E., 10 lks. dist., mkd. R11E S24 BT
- A balsam, 11 ins. diam., bears S. 58° W., 7 lks. dist., mkd. S30 BT
- A balsam, 20 ins. diam., bears N. 30° W., 17 lks. dist., mkd. R10E S19 BT

No evidence of the aspen bearing tree could be found.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in collar of rock; brass cap mkd.

T3N	
R10E	R11E
S24	S19
S25	S30

1965

from which I mark

- A pine, 6 ins. diam., bears N. 22° E., 88 lks. dist., mkd. S19 BT
- A Douglas Fir, 33 ins. diam., bears S. 45° E., 34 lks. dist., mkd. T3N R11E S30 BT
- A balsam, 10 ins. diam., bears S. 12° W., 24 lks. dist., mkd. T3N R10E S25 BT
- An aspen, 13 ins. diam., bears N. 49° W., 51 lks. dist., mkd. T3N R10E S24 BT

Corner is located on a medium steep W. slope in dense timber; a very small spring branch is S. of cor. 25 lks. dist., and small ravine is N. ½ ch. dist.; an open park is E. of cor. about 6 chs. dist.

At the ¼ sec. cor. of secs. 19 and 24, on E. bdy. of Tp., marked by a partly decayed wood post, 4 ft. long, 6 in. diam., flattened on two opposite sides, no mks. remaining; found lying on small mound of stone; from which

- Base of fallen pine, 10 ins. diam., bears S. 77° W., 21 lks. dist. (the record) trunk decayed and partly burnt, no mks. remaining.

No evidence found of the SE. bearing tree.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground to rock, and in a mound of stone; old wood post set alongside of iron post; brass cap mkd.

¼	
T3N	
R10E	R11E
S24	S19

1965

Remonumentation of Corners in T. 3 N., R. 10 E.

CHAINS

from which I mark

A pine, 10 ins. diam., bears S. 88° E., 89 lks.
dist., mkd. $\frac{1}{2}$ S19 BT

A pine, 8 ins. diam., bears S. 40° W., 25 lks.
dist., mkd. $\frac{1}{2}$ S24 BT

Corner is located on a gradual W. slope, about $3\frac{1}{2}$ chs.
dist. S. of small stream in ravine, drains W.; in medium
dense timber.

At the cor. of secs. 23, 24, 25, and 26, marked by a
portion of rotted wood post, no mks. remaining, found
lying on ground alongside of small mound of stone; from
which

A dead pine, 16 ins. diam., bears N. $75\frac{1}{2}^{\circ}$ E.,
114 lks. dist., (the record) blazed and shows
dim illegible scribe mks.

Base of fallen pine, 12 ins. diam., bears S. $44\frac{1}{2}^{\circ}$
E., 75 lks. dist., (the record) trunk shows
plain scribe mks.

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins.
in the ground, and in a mound of stone; brass cap mkd.

T3N R10E

S23 | S24

S26 | S25

1965

from which I mark

A pine, 11 ins. diam., bears S. 73° E., 86 lks.
dist., mkd. T3N R10E S25 BT

A pine, 5 ins. diam., bears S. 19° W., 58 lks.
dist., mkd. S26 BT

No other trees available.

Corner is located on gentle SE. slope in open sagebrush,
 $\frac{1}{2}$ ch. dist. N. of small stream in Cow Hollow, drains SW.

At the $\frac{1}{2}$ sec. cor. of secs. 13 and 24, marked by a sand-
stone, 14x10x10 ins., firmly set, mkd. $\frac{1}{2}$ on N. face;
from which

A balsam, 18 ins. diam., bears N. 17° W., 41 lks.
dist., mks. overgrown.

An aspen, 12 ins. diam., bears N. 47° W., 34 lks.
dist., marked in the bark, illegible; shows
old blaze below mks.

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins.
in the ground, orig. stone buried on W. side of post;
brass cap mkd.

Remonumentation of Corners in T. 3 N., R. 10 E.

CHAINS

T3N R10E

$$\frac{1}{2} \begin{array}{l} \text{S 13} \\ \text{S 24} \end{array}$$

1965

from which I mark

A fir, 13 ins. diam., bears N. 50° E., 101 lks.
dist., mkd. $\frac{1}{2}$ S13 BT

An aspen, 10 ins. diam., bears S. 20° W., 25 lks.
dist., mkd. $\frac{1}{2}$ S24 BT

Corner is located on gentle W. slope in dense aspen and balsam timber; about 10 chs. N. of a road.

At the $\frac{1}{2}$ sec. cor. of secs. 26 and 27, marked by a small mound of stone, no remaining evidence of the wood post; from which

A dead pine, 9 ins. diam., bears S. 5° W., 68 lks.
dist., shows old blaze, no mks. remaining.

No evidence found of the other bearing tree.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a mound of stone; brass cap mkd.

$$\frac{1}{2} \begin{array}{l} \text{T3N | R10E} \\ \text{S27 | S26} \end{array}$$

1965

from which I mark

A pine, 14 ins. diam., bears N. 65° E., 79 lks.
dist., mkd. $\frac{1}{2}$ S26 BT

A pine, 8 ins. diam., bears S. 87° W., 14 lks.
dist., mkd. $\frac{1}{2}$ S27 BT

Corner is located on a gradual NW. slope, in medium dense timber; about 4 chs. N. of ridge bearing E. and W. and about 15 chs. dist. N. of Cow Hollow.

At the cor. of secs. 22, 23, 26, and 27, marked by a wood post, 4 ins. sq., 2 ft. long, mkd. with distinct scribe mks., found lying on the ground, alongside of a small mound of stone; there is no remaining evidence of the orig. bearing trees, which have been bulldozed or cut down to clear sec. lines to the W. and N. from cor.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground to rock, and in a mound of stone; brass cap mkd.

Remonumentation of Corners in T. 3 N., R. 10 E.

CHAINS

T3N R10E	
S22	S23
S27	S26

1965

from which I mark

- A pine, 12 ins. diam., bears N. 60° E., 77 lks.
dist., mkd. T3N R10E S23 BT
- A pine, 12 ins. diam., bears S. 40° E., 68 lks.
dist., mkd. T3N R10E S26 BT
- A pine, 9 ins. diam., bears S. 11° W., 74 lks.
dist., mkd. T3N R10E S27 BT
- A pine, 10 ins. diam., bears N. 32° W., 83 lks.
dist., mkd. T3N R10E S22 BT

Corner is located on a W. slope, at intersection of cleared line extending W. for 1 mile, and N. for about 6 chs. dist.; about 5 chs. W. of a ridge, and E. about 4 chs. dist. of shallow draw, draining S.

At the cor. of secs. 14, 15, 22, and 23, marked by a decayed aspen post lying on ground alongside small circle of stones, no mks. remaining on post; from which

- A pine stump, 12 ins. diam., bears N. 70° W.,
41 lks. dist., no mks.

There is no remaining evidence of the other 3 bearing trees.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a mound of stone; brass cap mkd.

T3N R10E	
S15	S14
S22	S23

1965

from which I mark

- A pine, 11 ins. diam., bears N. 80° E., 71 lks.
dist., mkd. T3N R10E S14 BT
- A pine, 13 ins. diam., bears S. 85° E., 46 lks.
dist., mkd. T3N R10E S23 BT
- A pine, 9 ins. diam., bears S. 4° W., 50 lks.
dist., mkd. T3N R10E S22 BT
- A pine, 8 ins. diam., bears N. 70° W., 77 lks.
dist., mkd. T3N R10 E S15 BT

Corner is located on a gradual W. slope, in dense small aspen and scattered pines; in old burnt area.

At the ¼ sec. cor. of secs. 14 and 23, marked by a granite stone, 12x10x8 ins., firmly set, plainly mkd. ¼ on N. face; there is no remaining evidence of the 2 aspen bearing trees. Aspen trees in vicinity cut down by beavers.

Remonumentation of Corners in T. 3 N., R. 10 E.

CHAINS

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, orig. stone buried on N. edge of post; brass cap mkd.

T3N R10E
 $\frac{1}{2}$ $\frac{S\ 14}{S\ 23}$
 1965

from which I mark

A balsam, 8 ins. diam., bears N. 25° E., 22 lks. dist., mkd. $\frac{1}{2}$ S14 BT

A balsam, 7 ins. diam., bears S. 16° E., 34 lks. dist., mkd. $\frac{1}{2}$ S23 BT

Corner is located on slight NW. slope, about 30 lks. E. of E. edge of small beaver pond, about 4 chs. long, N. and S., and 2 chs. in width, E. and W.; a road, bearing nearly E. and W. is N. of cor. about $2\frac{1}{2}$ chs. dist.; timber is dense aspen and scattered balsam.

At the $\frac{1}{2}$ sec. cor. of secs. 14 and 15, marked by a sandstone, $11 \times 10 \times 7$ ins., firmly set, mkd. $\frac{1}{2}$ on W. face; witnessed by few stones; there is no remaining evidence of the two aspen bearing trees.

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, orig. stone buried alongside of post; brass cap mkd.

$\frac{1}{2}$
 T3N | R10E
 S15 | S14
 1965

from which I mark

An aspen, 9 ins. diam., bears S. 57° E., $27\frac{1}{2}$ lks. dist., mkd. $\frac{1}{2}$ S14 BT

A fir, 6 ins. diam., bears N. 70° W., 59 lks. dist., mkd. $\frac{1}{2}$ S15 BT

Corner is located on slight NW. slope, in aspen and scattered fir and pines; long, narrow opening to S. of cor.

At the closing cor. of secs. 14 and 15, on N. bdy. of Tp. and on the Utah-Wyoming State Line, marked by a sandstone, $18 \times 12 \times 3$ ins., firmly set full depth in the ground, plainly mkd. with CC and 4 grooves on S., and 2 grooves on E. face; small mound of stone on S. side; there is no remaining evidence of the 2 aspen bearing trees, but found a balsam stump, $2\frac{1}{2}$ ft. high, 19 ins. diam., mkd. with illegible scribe mks., bears N. $33\frac{1}{2}^{\circ}$ W., 138 lks. dist.

Remonumentation of Corners in T. 3 N., R. 10 E.

CHAINS

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, orig. stone buried on S. edge of post; brass cap mkd.

WYO	
S15	S14
T3N	R10E
CC	
1965	

from which I mark

A pine, 10 ins. diam., bears S. 32° E., 154 lks.
dist., mkd. CC S14 BT

An aspen, 5 ins. diam., bears S. 21° W., 41 lks.
dist., mkd. CC S15 BT

Corner is located on nearly level ground, 23 lks. N. of old buck pole fence, bearing about E. and SW., and 15 lks. W. of a pole fence extending N. for $\frac{1}{2}$ ch. dist. to end; in scattered aspen and few pines.

At the cor. of secs. 21, 22, 27, and 28, marked by a wood post, portion 1 ft. long, 5 ins. sq. shows dim scribe mks.; from which

A pine, 11 ins. diam., bears N. 70° E., 79 lks.
dist., blaze nearly overgrown, shows dim scribe mks.

A pine, 12 ins. diam., bears N. 37° W., 90 lks.
dist., blaze nearly overgrown, shows dim scribe mks.

There is no remaining evidence of the other 2 bearing trees.

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground to rock, and in a large mound of stone; brass cap mkd.

T3N R10E	
S21	S22
S28	S27

1965

from which I mark

A pine, 12 ins. diam., bears N. 10° E., 56 lks.
dist., mkd. T3N R10E S22 BT

A pine, 8 ins. diam., bears S. 62° E., 46 lks.
dist., mkd. T3N R10E S27 BT

A pine, 12 ins. diam., bears S. 27° W., 45 lks.
dist., mkd. T3N R10E S28 BT

A pine, 10 ins. diam., bears N. 27° W., 71 lks.
dist., mkd. T3N R10E S21 BT

Corner is located on gentle W. slope, 5 lks. N. of cor. of net and barbed wire fences, bearing N., S., and W.; a road, bearing nearly N. and S., bears W. of cor. about 8 chs. dist.

Remonumentation of Corners on the UTAH-WYOMING State Line,
on N. bdy., T. 3 N., R. 12 E.

CHAINS

The State Boundary between Utah and Wyoming was surveyed by A. V. Richards in 1873. Mile Posts Nos. 341, 342, and 343 remonumented are along the N. bdy. of T. 3 N., R. 12 E.

At Mile Cor. No. 341, on the Utah-Wyoming State Line, is marked by a pine post, 6 ins. sq., 4 ft. long, set in a mound of stone, and mkd. on the N. WYOMING, on the S., UTAH, on the E., 41NL 341M1873, from which

A dead pine, 11 ins. diam., bears N. 80° E.,
6 lks. dist., mkd. BT

A dead pine, 14 ins. diam., bears S. 4° W.,
20 lks. dist., mkd. BT

A sawed pine stump, 12 ins. diam., with trunk
on ground, mkd. BT, bears N. 89° W., 35 lks.
dist.

Base of rotted pine, bears N. 70° W., 17 lks.
dist., no mks. remaining.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins.
in the ground, mile cor. post, set alongside; brass cap
mkd.

WYO
341 M

UTAH
1965

from which I mark

A pine, 13 ins. diam., bears N. 58° E., 128 lks.
dist., mkd. WYO 341M BT

A pine, 7 ins. diam., bears S. 21° E., 62 lks.
dist., mkd. UT 341M BT

A pine, 9 ins. diam., bears S. 28° W., 53 lks.
dist., mkd. UTAH 341 BT

A pine, 11 ins. diam., bears N. 43° W., 133 lks.
dist., mkd. WYO 341 BT

Raise a large mound of stone around cor.

Corner is located on a gradual W. slope, in dense pines;
in line with old worm fence, and S. 30 lks. of wire fence
being constructed in cleared line about 30 ft. wide.

This cor. is on N. bdy. sec. 13, T. 3 N., R. 12 E.

At the Mile Cor. No. 342, on the Utah-Wyoming State Line,
marked by a pine post, 5 ft. long, 6 ins. diam., mkd.
WYOMING on one face, other mks. weathered off; post
found lying on ground alongside small mound of stone;
from which

A pine stump, 15 ins. diam., 6 ft. high, bears
N. 52° E., 16 lks. dist., mkd. BT

A pine snag, 15 ins. diam., 12 ft. high, bears
South, 37 lks. dist., mkd. BT

A pine stump, 13 ins. diam., 6 ft. high, bears
S. 48° W., 13 lks. dist., mkd. BT

A pine stump, 13 ins. diam., 8 ft. high, bears
N. 70° W., 18 lks. dist., mkd. BT

Remonumentation of Corners on the UTAH-WYOMING State Line,
on N. bdy., T. 3 N., R. 12 E.

CHAINS

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, wood post set alongside; brass cap mkd.

WYO

342M

UTAH

1965

from which I mark

A pine, 15 ins. diam., bears North, 149 lks. dist., mkd. WYO 342 BT

A pine, 7 ins. diam., bears S. 50° E., 19 lks. dist., mkd. UTAH 342M BT

A pine, 10 ins. diam., bears S. 38° W., 57 lks. dist., mkd. UTAH 342M BT

A pine, 10 ins. diam., bears N. 72° W., 106 lks. dist., mkd. WYO 342 M BT

Corner is located on a gradual W. to NW. slope, in medium dense pine timber; about 9 chs. E. of small stream, branch of Horse Creek, and about 10 chs. E. of the S. end of road from the N.; also 5 lks. S. of wire fence being constructed along the State Line.

At the Mile Cor. No. 343, on the Utah-Wyoming State Line, mkd. by a pine post, 6 ins. sq., 5 ft. long, set in a mound of stone, mkd. WYO on the N., UTAH on the S., 343M on the E., and other illegible mks.; from which

A pine stump, 10 ins. diam., with trunk on ground, mkd. BT, bears S. 85° E., 21 lks. dist.

A pine, 12 ins. diam., bears S. 18° E., 23 lks. dist., mkd. BT

There is no evidence remaining of the other 2 bearing trees.

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins. in the ground to rock, and in a mound of stone; orig. mile cor. set alongside of iron post; brass cap mkd.

WYO

343M

UTAH

1965

from which I mark

A pine, 14 ins. diam., bears S. 62° W., 18 lks. dist., mkd. UT 343M BT

A pine, 10 ins. diam., bears N. 72° W., 65 lks. dist., mkd. WYO 343M BT

Corner is located on nearly level ground, in medium dense pine timber, 2 lks. S. of wire fence, bearing E. and W., and is on the N. bdy. of sec. 15, T. 3 N., R. 12 E.; about 15 chs. E. of W. fork Blacks Fork River.

Remonumentation of Corners on Utah-Wyoming State Line,
on N. Bdy. of T. 3 N., R. 13 E.

CHAINS

T. 3 N., R. 13 E.

The State Boundary between Utah and Wyoming was surveyed by A. V. Richards, in 1873. Mile Corners Nos. 335 and 339 are on the N. bdy. of T. 3 N., R. 13 E. T. 3 N., R. 13 E.; the S. bdy. was surveyed by A. D. Ferron, in 1878; in 1881, Ferron surveyed the E. bdy. and the subdivisions, and resurveyed the S. and W. bdys. of the Tp.

At Mile Corner No. 335, on the Utah-Wyoming State Line, marked by a pine post, 5 ins. sq., 4 ft. long, loosely set in a small mound of stone, mkd. on the S., UTAH, on the N., WYOMING, and on the E., 41LN 335 1873; from which

- A pine, 15 ins. diam., bears N. 55° E., 15 lks. dist., mkd. BT
- A pine, 8 ins. diam., bears South, 6 lks. dist., mkd. BT
- A pine, 12 ins. diam., bears S. 75° W., 14 lks. dist., mkd. BT
- A pine, 10 ins. diam., bears N. 30° W., 16 lks. dist., mkd. BT

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, orig. cor. set alongside, and in a mound of stone; brass cap mkd.

WYO
335 M
UTAH
1965

from which I mark

- A pine, 10 ins. diam., bears N. 19° E., 70 lks. dist., mkd. WYO 335M BT
- A pine, 12 ins. diam., bears S. 51° E., 56 lks. dist., mkd. UTAH 335M BT
- A pine, 10 ins. diam., bears S. 75° W., 26½ lks. dist., mkd. UTAH 335M BT
- A pine, 10 ins. diam., bears N. 53° W., 51 lks. dist., mkd. WYO 335M BT

Corner is located on level bench, in medium dense pine timber; about ¼ mile dist. E. of Gilbert Creek.

At Mile Corner No. 339, on the Utah-Wyoming State Line, marked by pine post, 6 ins. diam., 4 ft. long, mkd. WYOMING on one side, and UTAH, on opposite side, other mks. have rotted away; post was found lying on the ground, alongside a small mound of stone, and in old pole fence; from which

- A dead pine, 16 ins. diam., bears S. 10° W., 17 lks. dist., mkd. BT

There is no remaining evidence of the other 2 bearing trees.

Remonumentation of Corners on Utah-Wyoming State Line,
on N. Bdy. of T. 3 N., R. 13 E.

CHAINS

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, orig. cor. set alongside, and in a mound of stone; brass cap mkd.

WYO
339M
UTAH
1965

from which I mark

- A spruce, 14 ins. diam., bears N. 32° E., 56 lks. dist., mkd. WYO 339M BT
- A pine, 12 ins. diam., bears S. 65° E., 36 lks. dist., mkd. UTAH 339M BT
- A balsam, 6 ins. diam., bears S. 63° W., 36½ lks. dist., mkd. UT BT
- A pine, 9 ins. diam., bears N. 68° W., 23 lks. dist., mkd. WYO 339M BT

Corner is located on a steep N. slope, in old E-W pole fence, in dense timber; about 6 chs. dist. E. of Archie Creek.

At the cor. of secs. 5, 6, 31, and 32, on S. bdy. of T. 3 N., R. 13 E., marked by a pine tree, 15 ins. diam., blazed on 4 sides, and mkd. with 1 notch on W., and 5 notches on E. side; no other mks. on tree; from which

- A pine, 12 ins. diam., bears N. 65° E., 18 lks. dist., mkd. S6 BT, on SW face.
- A pine stump, 13 ins. diam., bears N. 80° W., 14 lks. dist., no mks.

No other evidence of bearing trees. Considerable number of trees has been cut in the immediate area.

Being unable to set an iron post at the true cor. point, I establish a witness cor. at point 5 lks. W. of tree cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a mound of stone; brass cap mkd.

T3N R13E
 S31 | S32 → W
 S 6 | S 5 → C
 T2N
 1965

from which I mark

- A pine, 12 ins. diam., bears N. 12° E., 29½ lks. dist., mkd. WC T3N R13E S32 BT
- A pine, 10 ins. diam., bears S. 72° E., 56 lks. dist., mkd. WC T2N R13E S5 BT
- A pine, 9 ins. diam., bears S. 68° W., 27 lks. dist., mkd. WC T2N R13E S6 BT
- A pine, 10 ins. diam., bears N. 34° W., 29½ lks. dist., mkd. WC T3N R13E S31 BT

Remonumentation of Corners on the Utah-Wyoming State Line,
on N. bdy. of T. 3 N., R. 13 E.

CHAINS

Corner is located on gentle E. slope, in medium dense timber, about 10 chs. W. of Steel Creek.

At the $\frac{1}{2}$ sec. cor. of secs. 5 and 32, on S. bdy. of Tp., marked by a pine tree, 12 ins. diam., blazed on 4 sides, shows dim scribe mks. on N. side, partly overgrown; from which

A dead pine, 9 ins. diam., bears S. 50° E.,
13 lks. dist., mkd. $\frac{1}{2}$ S BT

A dead pine, 15 ins. diam., bears S. 86° W.,
25 lks. dist., mkd. $\frac{1}{2}$ S BT

Being unable to set an iron post at the true cor. point, I establish a witness cor. at a point East, 5 lks. dist. of the tree cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, and in a mound of stone; brass cap mkd.

T3N R13E
W ← S32
C ← S5
1965

from which I mark

A pine, 9 ins. diam., bears N. 29° E., 9 lks.
dist., mkd. WC $\frac{1}{2}$ S32 BT

A pine, 12 ins. diam., bears S. 24° E., 13 lks.
dist., mkd. WC $\frac{1}{2}$ S5 BT

Corner is located on gentle NW. slope in medium dense pine timber.

At the cor. of secs. 4, 5, 32, and 33, on S. bdy. of Tp., marked by the stump, $2\frac{1}{2}$ ft. high, of a double pine tree cor., alongside is an 8 ft. section of tree trunk, on the ground, properly mkd.; from which

A pine stump, 12 ins. diam., bears N. 30° E.,
7 lks. dist., trunk lying on the ground is
mkd. S34 BT

A pine, 9 ins. diam., bears S. 10° E., 16 lks.
dist., mkd. S3 BT

A dead pine, 9 ins. diam., bears N. 30° W.,
24 lks. dist., mkd. S33 T3N R13E BT

At W. base of the cor. stump

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, and in a large mound of stone; brass cap mkd.

T3N R13E
S32 | S33
S 5 | S 4
1965

from which I mark

Remonumentation of Corners in T. 3 N., R. 13 E.

CHAINS

- A pine, 11 ins. diam., bears N. 28° E., 71 lks.
dist., mkd. T3N R13E S33 BT
- A pine, 13 ins. diam., bears S. 36° E., 43 lks.
dist., mkd. T2N R13E S4 BT
- A pine, 9 ins. diam., bears S. 74° W., 45 lks.
dist., mkd. T2N R13E S5 BT
- A pine, 10 ins. diam., bears N. 17° W., 78 lks.
dist., mkd. T3N R13E S32 BT

Corner is located on a gradual E. slope, in medium dense pine timber; about 4 chs. W. of unimproved road bearing nearly N. and S.

At the $\frac{1}{2}$ sec. cor. of secs. 33 and 34, marked by a sandstone, 12x10x4 ins., lying on a small mound of stone, plainly mkd. $\frac{1}{2}$; no other accessories recorded.

At cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, orig. stone buried along E. side of post, and in a mound of stone; brass cap mkd.

$\frac{1}{2}$
T3N R13E
S33 S34

1965

from which I mark

- A pine, 8 ins. diam., bears N. 83° E., 22 lks.
dist., mkd. $\frac{1}{2}$ S34 BT
- A pine, 7 ins. diam., bears S. 62° W., 29 $\frac{1}{2}$ lks.
dist., mkd. $\frac{1}{2}$ S33 BT

Corner is located on a gradual NW. to W. slope, in dense small pine timber; about 8 chs. S. of a graded road, bearing NE. and SW.

At the $\frac{1}{2}$ sec. cor. of secs. 32 and 33, marked by a sandstone, 17x13x6 ins., mkd. $\frac{1}{2}$, lying on a small circle of stones; from which

- A pine, 13 ins. diam., bears S. 58° E., 15 lks.
dist., mkd. $\frac{1}{2}$ S BT (record S. 2° E., 15 lks.)
- A pine, 13 ins. diam., bears S. 70° W., 14 lks.
dist., mkd. $\frac{1}{2}$ S BT (record N. 85° W., 14 lks.)

At cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, orig. stone buried alongside of iron post, and in a mound of stone; brass cap mkd.

$\frac{1}{2}$
T3N R13E
S32 S33

1965

from which I mark

Remonumentation of Corners in T. 3 N., R. 13 E.

CHAINS

A pine, 10 ins. diam., bears S. 20° E., 41½ lks. dist., mkd. ¼ S33 BT
 A pine, 13 ins. diam., bears N. 18° W., 40 lks. dist., mkd. ¼ S32 BT

Corner is located on a slight E. slope, in pine timber; about 12 chs. dist. W. of U. S. Forest Service Hewinta Guard Station.

At the cor. of secs. 28, 29, 32, and 33, marked by a quartzite stone, 21x9x7 ins., firmly set, mkd. 1 notch on S., and 4 notches on E. edge; from which

A dead pine, 22 ins. diam., bears N. 35° E., 17 lks. dist., mkd. T3N R13E S29 BT

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground to rock, and in a mound of stone; orig. stone set alongside of iron post; brass cap mkd.

T3N	R13E
S29	S28
S32	S33
1965	

from which I mark

A pine, 10 ins. diam., bears N. 5° E., 165 lks. dist., mkd. T3N R13E S28 BT
 A pine, 12 ins. diam., bears S. 87° E., 44 lks. dist., mkd. T3N R13E S33 BT
 A pine, 12 ins. diam., bears S. 13° W., 78 lks. dist., mkd. T3N R13E S32 BT
 A pine, 14 ins. diam., bears N. 88° W., 64 lks. dist., mkd. T3N R13E S29 BT

Corner is located on a SE. slope, in scattered pine timber; about 1 ch. S. of Steel Creek, drains N. 80° E.; old log cabin bears SE. about 5 chs. dist.

At the ¼ sec. cor. of secs. 28 and 33, marked by a quartzite stone, 13x7x7 ins., set in a small circle of stones, mkd. ¼ on N. face; from which

A pine, 14 ins. diam., bears S. 78° E., 17 lks. dist., mkd. ¼ S BT
 A pine stump, 15 ins. diam., mkd. BT., bears N. 32° W., 13 lks. dist.; 6 ft. log alongside, mkd. S BT

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, orig. stone buried on N. side, and in a mound of stone; brass cap mkd.

T3N	R13E
¼	S28
	S33
1965	

Remonumentation of Corners in T. 3 N., R. 13 E.

CHAINS

from which I mark

A pine, 7 ins. diam., bears S. 7° E., 14 lks.
dist., mkd. $\frac{1}{4}$ S33 BT

A pine, 9 ins. diam., bears N. 7° W., 12 lks.
dist., mkd. $\frac{1}{4}$ S28 BT

Corner is located on a gentle W. slope, in dense pine
timber; about 15 chs. E. of W. Fork of Smith's Creek.

CHAINS

CERTIFICATE OF SURVEY

I, Andrew Nelson, Cadastral Surveyor, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 15 day of February, 1961, I have remonumented corners in Townships 2 North, Ranges 11, 12, and 13 East, Townships 3 North, Ranges 10, 12 and 13 E, and Mile Corners Nos. 335, 339, 341, 342, and 343, on Utah-Wyoming State Line,

of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

December 6, 1965 (Date)

Andrew Nelson (Cadastral Surveyor)

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

SUBMITTED FOR APPROVAL Date MAR 17 1966

BUREAU OF LAND MANAGEMENT, Washington, D. C.

The foregoing field notes of the remonumentation of corners in Townships 2 North, Ranges 11, 12, and 13 East, Townships 3 North, Rs. 10, 12 and 13 E., and Mile Corners Nos. 335, 339, 341, 342, and 343, on Utah-Wyoming State Line,

executed by Andrew Nelson, Cadastral Surveyor having been critically examined and found correct, are hereby approved.

MAY 5 1966 (Date)

E. E. Hemington (Chief, Division of Engineering) NE

CERTIFICATE OF TRANSCRIPT

I CERTIFY That the foregoing transcript of the field notes of the above-described surveys in, is a true copy of the original field notes.

(Date)

(Chief, Division of Engineering)

Blank

Page

Blank

Page

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
ORIGINAL

471

FIELD NOTES

OF THE

REMONUMENTATION OF CORNERS

IN

TOWNSHIP 29 SOUTH, RANGE 5 WEST

TOWNSHIP 30 SOUTH, RANGE 4 WEST

TOWNSHIP 30 SOUTH, RANGE 5 WEST

Of the SALT LAKE Meridian,

In the State of UTAH

EXECUTED BY

LaVern Griffin

Survey Technician

Under special instructions dated February 15, 19 61, which provided for the surveys
included under Group Number 447, approved February 16, 1961,
and assignment instructions dated July 16, 19 65.

Survey commenced September 8, 19 65

Survey completed September 10, 19 65

472

DEPT. OF THE INTERIOR
BUR OF LAND MGMT

1966 MAY 11 PM 1 25 .1

RECEIVED
STATE & LAND OFFICE
SALT LAKE CITY, UTAH


INDEX DIAGRAM

Township _____, Range _____

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

CORNER REMONUMENTATION
INDEX DIAGRAM

Township 29 South, Range 5 West, Salt Lake Meridian

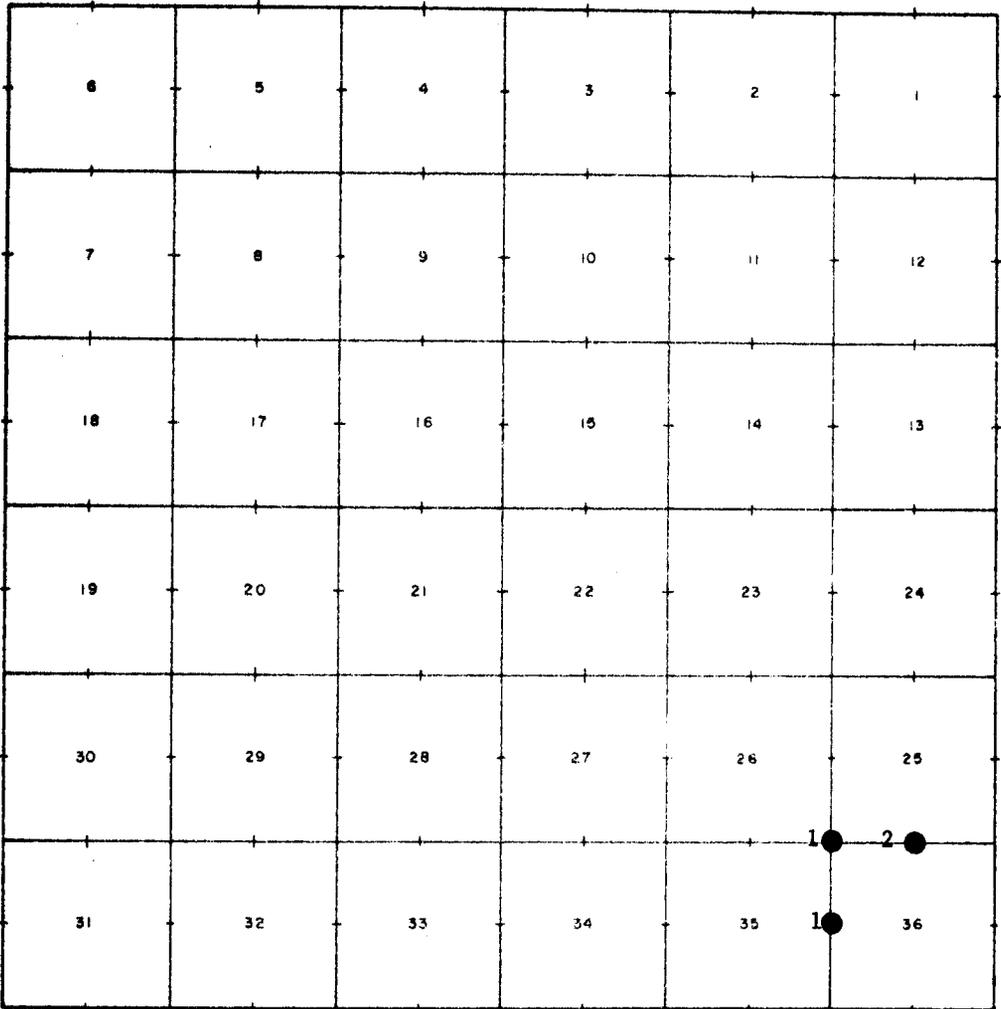


Blank

Page

CORNER REMONUMENTATION INDEX DIAGRAM

Township 30 South, Range 4 West, Salt Lake Meridian

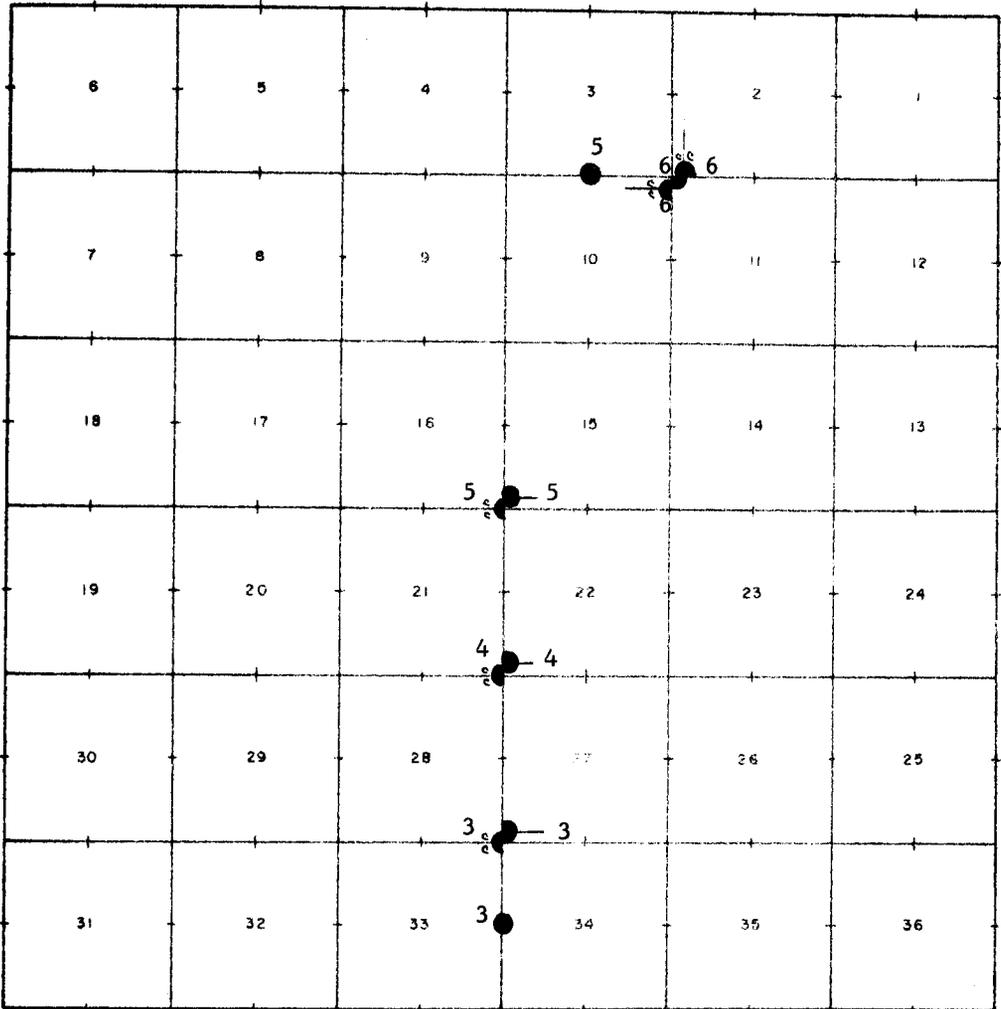

6th Stan. Par. S.

476

Blank

Page

478

Blank

Page

Remonumentation of Corners in T. 29 S., R. 5 W.

CHAINS

The following field notes are those of the remonumentation of certain identified original corners selected by the U. S. Forest Service as being adjacent to or controlling the boundaries of Forest Service Lands, situated in the FISHLAKE NATIONAL FOREST in the following townships:

T. 29 S., R. 5 W., Salt Lake Meridian
T. 30 S., R. 4 W., and
T. 30 S., R. 5 W.

The position of each corner was marked by the original monument or determined from corner accessories recorded in the survey record. The monumentation was requested by and accomplished in cooperation with the Forest Service.

T. 29 S., R. 5 W.

Township 29 South, Range 5 West, is situated within the Fishlake National Forest; the N., S., and E. boundaries, and the subdivisional lines were surveyed by Page & Erwin, in 1900.

At the $\frac{1}{4}$ sec. cor. of secs. 35 and 36, marked by a trachyte stone, 14x10x8 ins., firmly set, plainly mkd. $\frac{1}{4}$ on N. face; from which

An aspen, 6 ins. diam., bears S. 42° E., 24 lks. dist., mks. in bark illegible.
An aspen, 9 ins. diam., bears S. 82° W., 15 lks. dist., mkd. T29S R5W S35 BT

At cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, orig. stone buried on W. side of post; brass cap mkd.

T29S R5W
 $\frac{1}{4}$
S35 | S36
1965

from which I mark

An aspen, 12 ins. diam., bears S. 84° E., 37 lks. dist., mkd. $\frac{1}{4}$ T29S R5W S36 BT
An aspen, 10 ins. diam., bears S. 66° W., 33 lks. dist., mkd. $\frac{1}{4}$ T29S R5W S35 BT

Corner is located on SW. slope in dense aspen timber; about 10 chs. S. of ridge, bears NW. and SE.

At the cor. of secs. 25, 26, 35, and 36, marked by a trachyte stone, 20x14x10 ins., firmly set, mkd. 1 notch on S. and E. edges; from which

An aspen, 10 ins. diam., bears East, 5 lks. dist., mkd. T29S R5W S25 BT

Remonumentation of Corners in T. 29 S., R. 5 W.

CHAINS

A spruce, 18 ins. diam., bears S. 53° E., 24 lks.
dist., mkd. T29S R5W S36 BT

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins.
in the ground, orig. stone buried on W. side of post;
brass cap mkd.

T29S R5W	
S26	S25
S35	S36

1965

from which I mark

A spruce, 6 ins. diam., bears N. 54° E., 9 lks.
dist., mkd. T29S R5W S25 BT

A pine, 12 ins. diam., bears S. 42° E., 46 lks.
dist., mkd. T29S R5W S36 BT

A pine, 14 ins. diam., bears S. 48° W., 62 lks.
dist., mkd. T29S R5W S35 BT

An aspen, 9 ins. diam., bears N. 56° W., 8 lks.
dist., mkd. T29S R5W S26 BT

Raise a mound of stone around cor.

Corner is located on W. slope in dense timber; about 7
chs. E. of a logging road, and about 3 chs. W. of top of
hill.

At the $\frac{1}{4}$ sec. cor. of secs. 25 and 36, marked by a
trachyte stone, 13x9x5 ins., firmly set in ground, and
in a small mound of stone, mkd. $\frac{1}{4}$ on N. face; from which

A balsam, 14 ins. diam., bears S. 44° E., 17 lks.
dist., mkd. BT T29S S36 R5W (record: N 60° E.,
40 lks.)

An aspen, 10 ins. diam., bears S. 43° W., 7 lks.
dist., mkd. BT T29S S36 R5W (record: S. 7 lks.)

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in
the ground, and in collar of rock, orig. stone buried on
S. side of post; brass cap mkd.

T29S R5W	
$\frac{1}{4}$	S25
	S36

1965

from which I mark

An aspen, 14 ins. diam., bears N. 47° E., 37 lks.
dist., mkd. $\frac{1}{4}$ S25 BT

A pine, 18 ins. diam., bears S. 29° E., 20 lks.
dist., mkd. $\frac{1}{4}$ S36 BT

Corner is located on a SW. slope, in dense aspen and
scattered pines; about 2 chs. E. of old logging road,
bears nearly N. and S.

Remonumentation of Corners in T. 30 S., R. 4 W.

CHAINS

T. 30 S., R. 4 W.

Township 30 South, Range 4 West, is situated partly within the Fishlake National Forest; the E. portion of the subdivisional lines (28 miles) was surveyed by Joseph Gorlinski, in 1871; the W. portion of the subdivisional lines was surveyed by Page & Erwin, in 1900.

At the $\frac{1}{2}$ sec. cor. of secs. 33 and 34, which was reestablished in the "1900" surveys, is marked by a trachyte stone, 16x12x8 ins., firmly set, mkd. $\frac{1}{2}$ on W. face, and witnessed by a small mound of stone, E. of cor.

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, old cor. stone buried on W. side of post; brass cap mkd.

T30S R4W

 $\frac{1}{2}$

S33|S34

1965

Raise a mound of stone around cor.

Corner is located on steep SW. slope of spur, sloping SE. in sagebrush; a draw, draining SE., bears SW. of cor. about 1 ch. dist.

At the closing cor. of secs. 28 and 33, marked by a trachyte stone, 24x12x6 ins., firmly set, marked CC on W. face, 1 groove on S. face, no other mks. found; witnessed by a small mound of stone, W. of cor.

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, orig. stone buried on W. side of post; brass cap mkd.

T30S R4W

C	S28		S34
C	S33		

1965

Raise a mound of stone around cor.

By the record: this closing cor. is S. $0^{\circ} 30'$ E., 66 lks. dist. from the cor. of secs. 22 and 27.

Corner is located on a NW. slope, about 3 chs. N. of spur, sloping NE.

At the cor. of secs. 27 and 34, which was reestablished in the "1900" surveys, marked by a trachyte stone, 18x12x4 ins., firmly set, mkd. 1 notch on S., and 3 notches on E. edge; witnessed by a small mound of stone, E. of cor.

At cor. point

Remonumentation of Corners in T. 30 S., R. 4 W.

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, stone cor. buried on E. side of post; brass cap mkd.

T30S	R4W
S28	S27
	S34

1965

Raise a mound of stone around cor.

Corner is located on open NW. slope.

At the closing cor. of secs. 21 and 28, marked by a trachyte stone, 18x12x8 ins., firmly set, mkd. 2 grooves on S., CC and 3 grooves on W. face; witnessed by a small mound of stone, W. of cor.

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, orig. stone buried on W. side of post; brass cap mkd.

	T30S	R4W
C	S21	S27
C	S28	

1965

Raise a small mound of stone around cor.

Corner is located on E. slope of sagebrush bench, $\frac{1}{2}$ ch. S. of wash draining E.; unimproved road in wash. By the record: this closing cor. is S. $0^{\circ} 30'$ E., 1.32 chs. from cor. of secs. 22 and 27.

At the cor. of secs. 22 and 27, marked by a trachyte stone, 18x12x12 ins., mkd. 2 notches on one edge and 3 notches on cornering edge, found lying on the ground at W. edge of small mound of stone.

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, orig. stone buried on E. side of post; brass cap mkd.

	T30S	R4W
S21	S22	S27

1965

Raise a mound of stone around cor.

Corner is located on E. slope of sagebrush bench, about 80 lks. N. of wash and unimproved road.

Remonumentation of Corners in T. 30 S., R. 4 W.

CHAINS

At the closing cor. of secs. 16 and 21, marked by a trachyte stone, 16x14x8 ins., firmly set, mkd. 3 grooves on S., and CC and 3 grooves on W. face; witnessed by a small mound of stone, W. of cor.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, orig. stone buried on W. side of post; brass cap mkd.

	T30S	R4W
C	S16	
C	S21	S22
	1965	

Raise a mound of stone around cor.

Corner is located on sagebrush bench, slopes NE.; about 1 ch. S. of wash, draining E.

By the record: this closing cor. is S. 0° 31' E., 2.00 chs. dist. from the cor. of secs. 15 and 22.

At the cor. of secs. 15 and 22, which was reestablished in the "1900" surveys, marked by a trachyte stone, 16x12x6 ins., firmly set, mkd. 3 notches on S., and E. edges; witnessed by a small mound of stone E. of cor.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, old cor. stone buried on E. side of post; brass cap mkd.

	T30S	R4W
	S16	S15
		S22
	1965	

Raise a mound of stone around cor.

Corner is located on sagebrush bench, slopes NE.; about 1 ch. N. of wash, draining E.

At the ¼ sec. cor. of secs. 3 and 10, marked by a trachyte stone, 14x10x6 ins., firmly set, mkd. ¼ on N. face; witnessed by a small mound of stone, N. of cor.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, orig. stone buried on S. side of post; brass cap mkd.

	T30S	R4W
	S3	
¼	S10	
	1965	

Raise a mound of stone around cor.

Remonumentation of Corners in T. 30 S., R. 4 W.

CHAINS

Corner is located on a SE. slope, in fence, bearing E. and W.

At the closing cor. of secs. 3 and 10, marked by a trachyte stone, 12x10x8 ins., firmly set, mkd. 5 notches on S., 2 notches on E. edge, and CC on W. face; witnessed by a small mound of stone, W. of cor.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, orig. stone buried on W. side of post; brass cap mkd.

	T30S R4W		
C	S 3	S11	
C	S10		
	1965		

Raise a mound of stone around cor.

Corner is located on SE slope of spur sloping SE.

By the record: this closing cor. is S. 0° 31' E., 3.34 chs. dist. from the NW. cor. of sec. 11.

At the NW. cor. of sec. 11, marked by a trachyte stone, 18x14x10 ins., firmly set, mkd. 5 notches on S., and 2 notches on E. edge; witnessed by a small mound of stone SE. of cor.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, orig. stone buried on E. side of post; brass cap mkd.

S3	T30SR4W
	S 11
	1965

Raise a mound of stone around cor.

Corner is located on a SW. slope, about 1½ chs. S. of top of spur, slopes SE.; lava outcrop bears NW. about 3 chs. dist.

At the closing cor. of sec. 2 and 3, marked by a trachyte stone, 18x12x8 ins., firmly set, mkd. 5 notches on S., 2 notches on E. edge, and CC on N. face; witnessed by a mound of stone, N. of cor.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, orig. stone buried on N. side of post; brass cap mkd.

Remonumentation of Corners in T. 30 S., R. 4 W.

CHAINS

T30S R4W

CC

S3 | S2

S11

1965

Raise a mound of stone around cor.

Corner is located on a SW. slope of spur.

By the record: this closing cor. is N. $89^{\circ} 30'$ E., 1.30 chs. dist. from the NW. cor. of sec. 11.

T. 30 S., R. 5 W.

Township 30 South, Range 5 West, Salt Lake Mer., is situated within the Fishlake National Forest; the north boundary, and the subdivisional lines were surveyed by Page & Erwin, in 1900.

At the cor. of secs. 2, 3, 34, and 35, on N. bdy. of Tp., marked by a trachyte stone, 18x14x7 ins., firmly set, mkd. 4 notches on W. and 2 notches on E. edge; from which

An aspen, 10 ins. diam., bears N. 11° W., 26 lks. dist., mkd. in bark S34 BT (other mks. illegible)

No evidence of other orig. bearing trees.

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, orig. stone buried on N. side of post; brass cap mkd.

T29S R5W

S34 S35

S 3 | S 2

T30S

1965

from which I mark

A pine, 8 ins. diam., bears N. 20° E., 5 lks. dist., mkd. T29S R5W S35 BT

A pine, 24 ins. diam., bears S. 2° E., 14 lks. dist., mkd. T30S R5W S2 BT

A pine, 12 ins. diam., bears S. 71° W., 78 lks. dist., mkd. T30S R5W S3 BT

A pine, 14 ins. diam., bears N. 67° W., 37 lks. dist., mkd. T29S R5W S34 BT

Raise a mound of stone around cor.

Corner is located on a W. slope, 5 lks. W. of pole fence, bearing N-S.; about 7 chs. dist. E. of draw, drains NW.

At the $\frac{1}{2}$ sec. cor. of secs. 2 and 35, on N. bdy. of Tp., marked by a trachyte stone, 14x8x4 ins., firmly set, mkd. $\frac{1}{2}$ S2 on S. face (no other mks. identified); there is no remaining evidence of the 2 aspen bearing trees.

Remonumentation of Corners in T. 30 S., R. 5 W.

CHAINS

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, and in a collar of rock; orig. stone buried on N. side of post; brass cap mkd.

T29S R5W
 $\frac{1}{4}$ $\frac{S35}{S 2}$
 T30S R5W
 1965

from which I mark

- A pine, 14 ins. diam., bears S. 50° E., 25 lks. dist., mkd. $\frac{1}{4}$ T30SR5W S2 BT
 A pine, 10 ins. diam., bears N. 58° W., 32 lks. dist., mkd. $\frac{1}{4}$ T29SR5W S35 BT

Corner is located on steep E. slope, in heavy aspen and pine timber; about 9 chs. W. of Inat Creek, drains N.

At the cor. of secs. 1, 2, 35 and 36, on N. bdy. of Tp., marked by a trachyte stone, 12x10x8 ins., firmly set, marked 5 notches on W. and 1 notch on E. edge; from which

- An aspen, 8 ins. diam., bears N. 45° E., 12 lks. dist., mkd. T29S R5W S36 BT
 An aspen, 12 ins. diam., bears N. 11° W., 26 lks. dist., mkd. T29S R5W S35 BT

There is no remaining evidence of the other 2 bearing trees.

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, and in a collar of rock, orig. stone buried on N. side of post; brass cap mkd.

T29S | R5W
 $\frac{S35}{S 2}$ | $\frac{S36}{S 1}$
 T30S | R5W
 1965

from which I mark

- A pine, 16 ins. diam., bears N. 24° E., 50 lks. dist., mkd. T29S R5W S36 BT
 A pine, 12 ins. diam., bears S. 38° E., 64 lks. dist., mkd. T30S R5W S1 BT
 A pine, 8 ins. diam., bears S. 70° W., 31 lks. dist., mkd. T30S R5W S2 BT
 A pine, 8 ins. diam., bears N. 62° W., 49 lks. dist., mkd. T29S R5W S35 BT

Corner is located on steep N. slope, in scattered aspen and pine timber; about 4 chs. W. of ravine, drains N.

Remonumentation of Corners in T. 30 S., R. 5 W.

CHAINS

At the $\frac{1}{4}$ sec. cor. of secs. 1 and 36, on N. bdy. of Tp., marked by a trachyte stone, 14x10x5 ins., mkd. $\frac{1}{4}$ on N. face; there is no remaining evidence of bearing trees, destroyed by fire.

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground; orig. stone buried on S. side of post; brass cap mkd.

T29S	R5W
	S36
$\frac{1}{4}$	S 1
	T30S
	1965

Raise a mound of stone around cor.

Corner is located on E. end of mountain, in heavy burnt timber, and about 3 chs. E. of steep descent; a N-S log fence, bears E. of cor. about 6 chs. dist.

At the cor. of Tps. 29 and 30 S., Rs. 4 and 5 W., marked by a trachyte stone, 10x8x7 ins., firmly set, mkd. with 6 notches on the 4 edges; from which

An aspen, 16 ins. diam., bears N. 58° E., 75 lks. dist., mks. in bark are nearly illegible

An aspen, 12 ins. diam., bears S. 50° W., 42 lks. dist., mkd. S1 BT

An aspen, 12 ins. diam., bears N. $51\frac{1}{2}^{\circ}$ W., 42 lks. dist., mks. in bark are nearly illegible.

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, and in a collar of rock; orig. stone buried on N. side of post; brass cap mkd.

T29S		
R5W		R4W
S36		S31
S 1		S6
		T30S
R5W		R4W
		1965

from which I mark

A pine, 24 ins. diam., bears N. 39° E., 75 lks. dist., mkd. T29S R4W S31 BT

Aspen, 14 ins. diam., bears S. 55° W., 44 lks. dist., mkd. T30S R5W S1 BT

An aspen, 10 ins. diam., bears N. 59° W., 56 lks. dist., mkd. T29S R5W S36 BT

Corner is located on SE. slope in scattered timber; in edge of open flat; about 4 chs. N. of a dirt road, bearing NE. and SW.

Remonumentation of Corners in T. 30 S., R. 5 W.

CHAINS

At the cor. of secs. 1, 2, 11, and 12, marked by a trachyte stone, 16x14x8 ins., properly mkd. with dim notches, lying on the ground at E. base of small mound of stone; from which

An aspen, 14 ins. diam., bears N. 36° E., 33 lks. dist., mks. in bark are nearly illegible

A pine, 8 ins. diam., bears S. 15° W., 20 lks. dist., mkd. T30S R5W S11 BT

An aspen, 14 ins. diam., bears N. 40° W., 11 lks. dist., mkd. T30S R5W S2 BT

No evidence found of the SE. bearing tree.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in collar of rock; orig. stone buried on E. side of post; brass cap mkd.

T30S	R5W
S 2	S 1
S11	S12

1965

from which I mark

An aspen, 8 ins. diam., bears N. 42° E., 34 lks. dist., mkd. S1 BT

A balsam, 14 ins. diam., bears S. 16° E., 24 lks. dist., mkd. T30S R5W S12 BT

A balsam, 5 ins. diam., bears S. 31° W., 16 lks. dist., mkd. S11 BT

A balsam, 10 ins. diam., bears N. 1° W., 50 lks. dist., T30S R5W S2 BT

Corner is located on steep NE. slope in dense balsam and aspen timber; about 3½ chs. S. of dirt road bearing NW. and SE.

At the ¼ sec. cor. of secs. 1 and 2, marked by a trachyte stone, 12x10x8 ins., mkd. ¼ S2 on one face, found lying on the ground; from which

An aspen, 14 ins. diam., bears N. 60° E., 40 lks. dist., (the record) mkd. ¼ S1 BT

No evidence found of the NW. bearing tree.

At cor. point

Set an iron post, 30 ins. long; 2½ ins. diam., 24 ins. in the ground; and in collar of rock; orig. stone buried on W. side of post; brass cap mkd.

T30S	R5W
¼	
S2	S1

1965

from which I mark

Rembumentation of Corners in T. 30 S., R. 5 W.

CHAINS

A pine, 10 ins. diam., bears S. 57° E., 56 lks.
dist., mkd. $\frac{1}{4}$ T30S R5W S1 BT
A pine, 8 ins. diam., bears N. 89° W., 15 lks.
dist., mkd. $\frac{1}{4}$ T30S R5W S2 BT

Corner is located on a W. slope in dense pine and aspen timber.

At the cor. of secs. 2, 3, 10, and 11, marked by a trachyte stone, 14x11x5 ins., set in a mound of stone, mkd. 5 notches on S. and 2 notches on E. edge; from which

A pine, 20 ins. diam., bears N. 52° E., 114 lks.
dist., mkd. T30S R5W S2 BT
A pine, 26 ins. diam., bears S. 85° E., 10 lks.
dist., mks. nearly overgrown, dim scribe mks.
visible.
A pine, 20 ins. diam., bears S. 80° W., 13 lks.
dist., mks. T30S R5W S10 BT

No evidence found of the NW. bearing tree.

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, and in collar of rock; orig. stone buried on W. side of post; brass cap mkd.

T30S	R5W
S 3	S 2
S10	S11
1965	

from which I mark

A pine, 26 ins. diam., bears S. 45° E., 42 lks.
dist., mkd. T30S R5W S11 BT
A pine, 20 ins. diam., bears S. 49° W., 50 lks.
dist., mkd. T30S R5W S10 BT
A pine, 16 ins. diam., bears N. 80° W., 12 lks.
dist., mkd. T30S R5W S3 BT

Corner is located on a N. slope in dense pine timber; a dirt road bearing about N. 70° W. and S. 70° E., is S. of cor. about 2 chs. dist.

At the $\frac{1}{4}$ sec. cor. of secs. 2 and 11, marked by a trachyte stone, 20x10x5 ins., firmly set, mkd. $\frac{1}{4}$ on N. face.

There is no evidence of the two orig. aspen bearing trees.

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, and in collar of rock; orig. stone buried on N. side of post; brass cap mkd.

T30S	R5W
$\frac{1}{4}$	S 2
$\frac{1}{4}$	S11
1965	

Remonumentation of Corners in T. 30 S., R. 5 W.

CHAINS

from which I mark

A pine, 12 ins. diam., bears N. 25° E., 20 lks.
dist., mkd. $\frac{1}{4}$ T30S R5W S2 BT

A pine, 28 ins. diam., bears S. 38° E., 38 lks.
dist., mkd. $\frac{1}{4}$ S11 BT

Corner is located on a NE. slope in dense timber; a dirt road, bearing NW. and SE., is NE of cor. about 12 chs. dist.

At the $\frac{1}{4}$ sec. cor. of secs. 2 and 3, marked by a trachyte stone, 20x16x10 ins., mkd. $\frac{1}{4}$ S3 on W. face, set in a mound of stone; from which

An aspen, 10 ins. diam., bears S. 45° W., 12 lks.
dist., mkd. T30S R5W S3 BT

No evidence was found of the other aspen bearing tree.

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, and in a mound of stone; orig. stone buried on W. side of post; brass cap mkd.

T30S R5W

$\frac{1}{4}$
S3 | S2

1965

from which I mark

A pine, 12 ins. diam., bears N. 52° E., 52 lks.
dist., mkd. $\frac{1}{4}$ S2 BT

A pine, 30 ins. diam., bears S. 78° W., 19 lks.
dist., mkd. $\frac{1}{4}$ S3 BT

Corner is located on a gradual S. slope, in scattered pine and aspen timber; a pole fence bearing NW. and SE., bears SW. 26 lks. dist.

CERTIFICATE OF SURVEY

I, LaVern Griffin, Survey Technician, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 15 day of February, 1961, I have remonumented corners in Township 29 South, Range 5 West, Township 30 South, Range 4 West, and Township 30 South, Range 5 West

of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

December 6, 1965 (Date)

LaVern Griffin (Cadastral Surveyor)

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

SUBMITTED FOR APPROVAL Date MAR 17 1966

BUREAU OF LAND MANAGEMENT, Washington, D. C.

The foregoing field notes of the remonumentation of corners in Township 29 South, Range 5 West, Township 30 South, Range 4 West, and Township 30 South, Range 5 West,

executed by LaVern Griffin, Survey Technician, having been critically examined and found correct, are hereby approved.

MAY 5 1966 (Date)

E. S. Livingston (Chief, Division of Engineering)

CERTIFICATE OF TRANSCRIPT

I CERTIFY That the foregoing transcript of the field notes of the above-described surveys in, is a true copy of the original field notes.

(Date)

(Chief, Division of Engineering)

Blank

Page

Blank

Page

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

ORIGINAL

495

FIELD NOTES

OF THE

REMONUMENTATION OF CORNERS

IN

TOWNSHIP 26 SOUTH, RANGE 23 EAST

TOWNSHIP 25 SOUTH, RANGE 24 EAST

TOWNSHIP 26 SOUTH, RANGE 26 EAST

TOWNSHIP 27 SOUTH, RANGE 26 EAST

Of the SALT LAKE Meridian,

In the State of UTAH

EXECUTED BY

LaVern Griffin

Survey Technician

Under special instructions dated February 15, 1961, which provided for the surveys
included under Group Number 447, approved February 16, 1961,
and assignment instructions dated July 16, 1965.

Survey commenced August 31, 1965

Survey completed September 3, 1965

DEPT. OF THE INTERIOR
BUR OF LAND MGMT

1966 MAY 11 PM 1 25 2

RECEIVED
STATE & LAND OFFICE
SALT LAKE CITY, UTAH

INDEX DIAGRAM


Township _____, Range _____,

6	5	4	3	2	1
7	8	9	10	11	12
13	14	15	16	17	18
19	20	21	22	23	24
25	26	27	28	29	30
31	32	33	34	35	36

CORNER REMONUMENTATION
INDEX DIAGRAM

497

Township 26 South, Range 23 East, Salt Lake Meridian

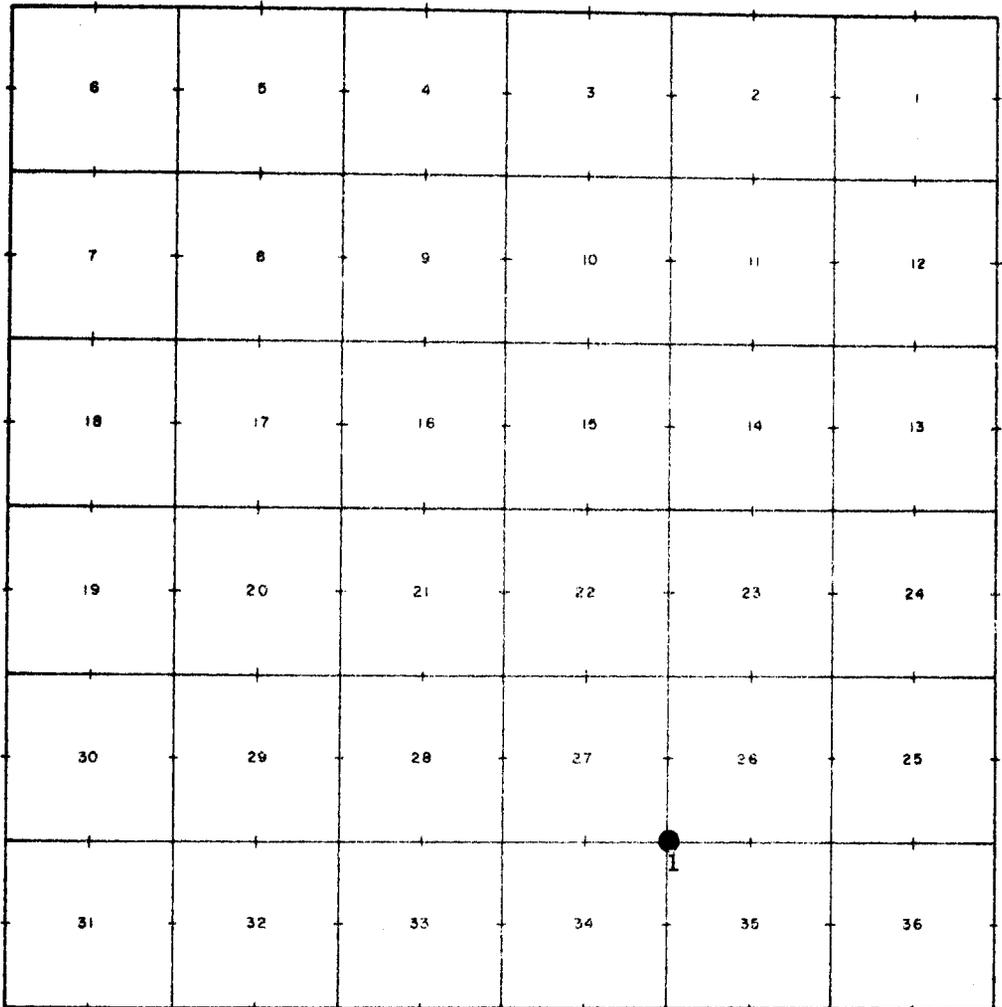


Blank

Page

CORNER REMONUMENTATION INDEX DIAGRAM

Township 25 South, Range 24 East, Salt Lake Meridian

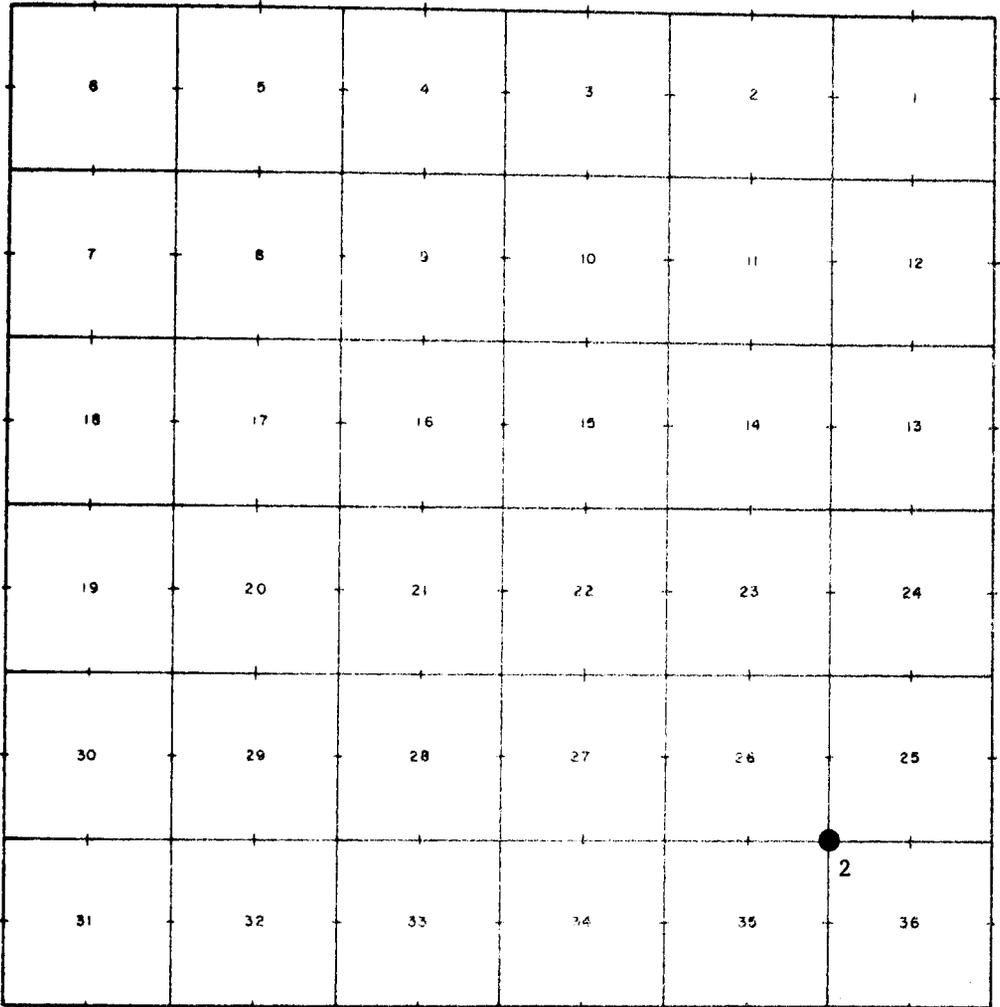


Blank

Page

CORNER REMONUMENTATION INDEX DIAGRAM

Township 26 South, Range 26 East, Salt Lake Meridian

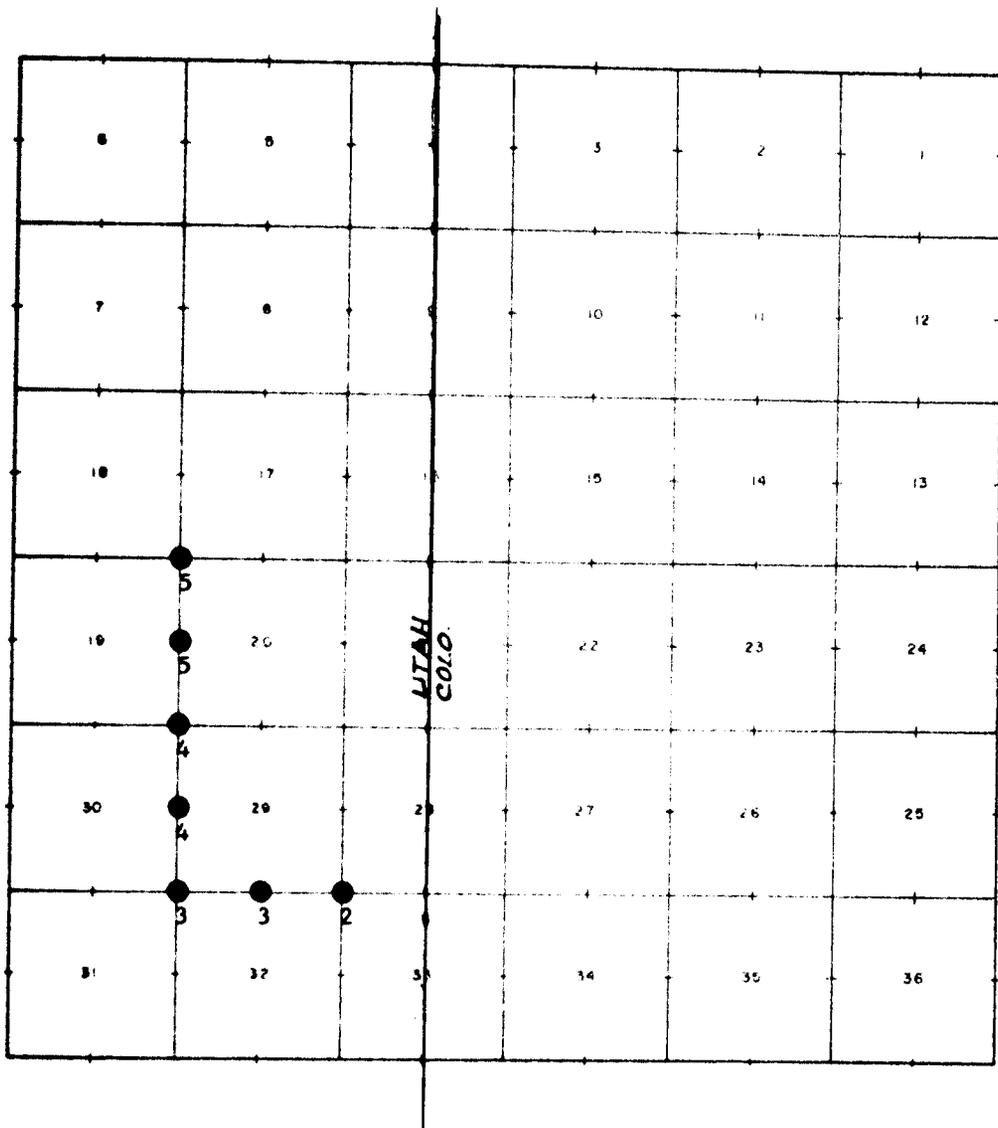


Blank

Page

CORNER REMONUMENTATION INDEX DIAGRAM

Township 27 South, Range 26 East, Salt Lake Meridian

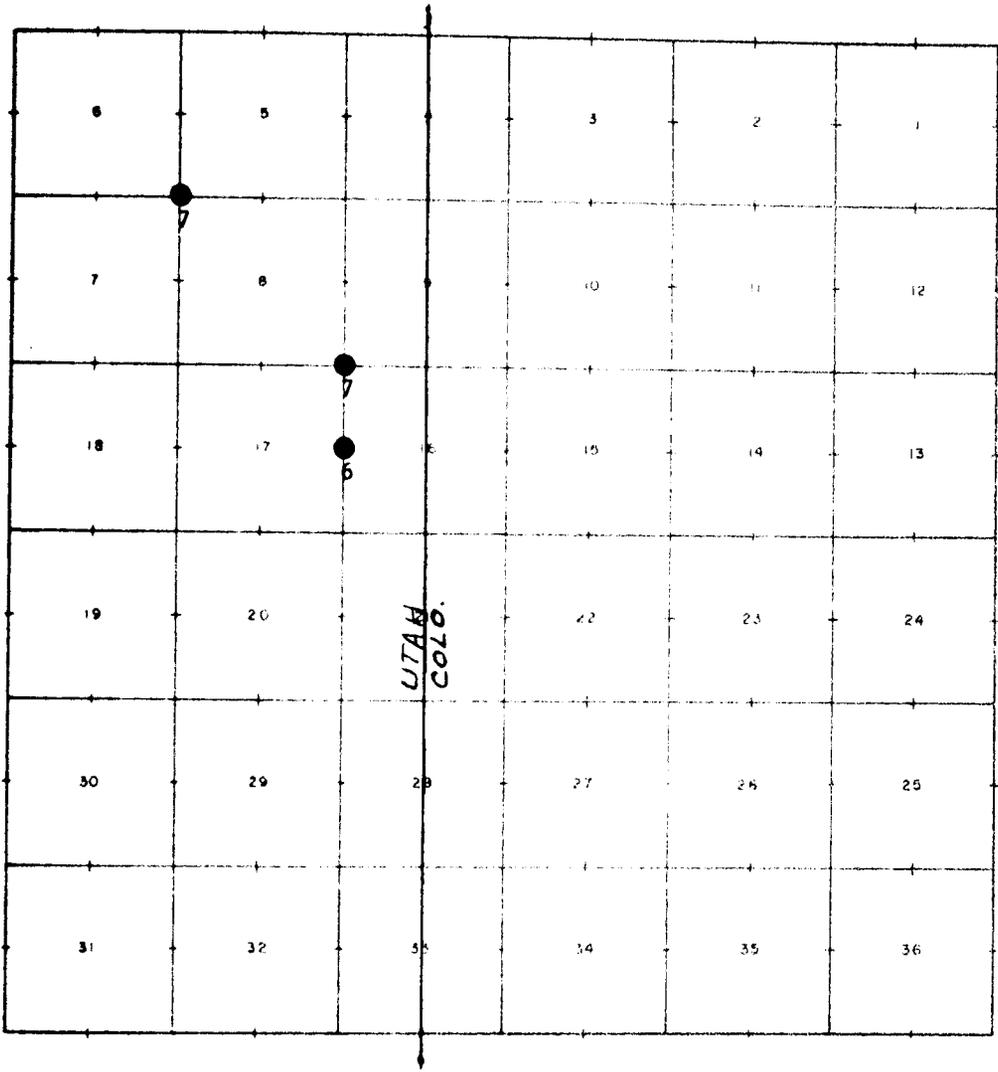

Blank

Page

Remonumentation of Corners in T. 26 S., R. 23 E.

CHAINS

The following field notes are those of the remonumentation of certain identified original corners selected by the U. S. Forest Service as being adjacent to or controlling the boundaries of Forest Service Lands, situated in the MANTI-LASAL NATIONAL FOREST (LASAL DIVISION) in the following townships:

- T. 26 S., R. 23 E., Salt Lake Mer.
- T. 25 S., R. 24 E.,
- T. 26 S., R. 26 E., and
- T. 27 S., R. 26 E.

The position of each cor. was marked by the original monument or determined from corner accessories recorded in the survey record. The monumentation was requested by and accomplished in cooperation with the Forest Service.

T. 26 S., R. 23 E.

Township 26 South, Range 23 East, Salt Lake Meridian, is situated partly within the Manti-Lasal National Forest (Lasal Division); a portion of the subdivisional lines were surveyed by Frank E. Baxter, in 1894.

At the cor. of secs. 26, 27, 34, and 35, marked by a sandstone, 18x10x4 ins.; firmly set, plainly mkd. 1 notch on S., and 2 notches on E. edge; from which

- A pinon, 18 ins. diam., bears N. 74° E., 97 lks. dist., mkd. T26S R23E S26 BT
- A pinon, 12 ins. diam., bears S. 23° E., 24 lks. dist., mkd. T26S R23E S35 BT
- A cedar, 12 ins. diam., bears S. 37° W., 9 lks. dist., mkd. T26S R23E S34 BT

No evidence was found of the NW. bearing tree.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, orig. stone buried on W. side of post; brass cap mkd.

T26S	R23E
S27	S26
S34	S35

1965

No other suitable bearing trees available.

Corner is located on a gradual NE. slope, at cor. of fences, bearing N., S., and E., and about 2 chs. S. of old dirt road, bearing E. and W.

T. 25 S., R. 24 E.

Township 25 South, Range 24 East, S. L. Mer., is situated partly within the Manti-Lasal National Forest (Lasal Div.); a portion of the subdivisional lines were surveyed by James M. Lentz, in 1901.

Remonumentation of Corners in T. 25 S., R. 24 E.

CHAINS

At the cor. of secs. 25, 26, 35, and 36, marked by a sandstone, 18x14x5 ins., firmly set, mkd. 1 notch on S. and E. edges; from which

A pine, 30 ins. diam., bears N. 46° E., 102 lks. dist., mkd. T25S R24E S25 BT

A pine, 28 ins., diam., bears S. 87° E., 24 lks. dist., mkd. T25S R24E S36 BT

There is no remaining evidence of the two aspen bearing trees.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, orig. stone buried on W. side of post; brass cap mkd.

T25S	R24E
S26	S25
S35	S36

1965

from which I mark

An aspen, 10 ins. diam., bears S. 75° W., 48 lks. dist., mkd. T25S R24E S35 BT

An aspen, 8 ins. diam., bears N. 34° W., 38 lks. dist., mkd. T25S R24E S26 BT

Corner is located on steep W. slope, in clump of aspen and few pines.

T. 26 S., R. 26 E.

Township 26 South, Range 26 East, Salt Lake Meridian, is situated partly within the Manti-Lasal National Forest, Lasal Division; the subdivisional lines were surveyed by E. Beuttner, in 1880.

At the cor. of secs. 28, 29, 32, and 33, marked by a sandstone, 22x12x6 ins., firmly set, mkd. 1 notch on S., and 4 notches on E. edge; from which

Base of fallen pine, 15 ins. diam., bears N. 15° 45' E., 18 lks. dist., trunk blazed, mks. 28 visible.

A pine, 36 ins. diam., bears S. 36½° E., 45 lks. dist., mkd. T26S R26E S33 BT

A pine, 20 ins. diam., bears N. 54° W., 85 lks. dist., blazed, mks. overgrown.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, orig. stone buried on W. side of post; brass cap mkd.

T26S	R26E
S29	S28
S32	S33

1965

Remonumentation of Corners in T. 26 S., R. 26 E.

CHAINS

from which I mark

- A pine, 11 ins. diam., bears N. 36° E., 50 lks.
dist., mkd. T26S R26E S28 BT
- A pine, 8 ins. diam., bears S. 52° E., 89 lks.
dist., mkd. T26S R26E S33 BT
- A pine, 14 ins. diam., bears S. 81° W., 28 lks.
dist., mkd. T26S R26E S32 BT
- A pine, 15 ins. diam., bears N. 30° W., 33 lks.
dist., mkd. T26S R26E S29 BT

Corner is located on a SW slope, in heavy oakbrush and scattered pine timber.

At the $\frac{1}{4}$ sec. cor. of secs. 29 and 32, marked by a sandstone, $15 \times 12 \times 10$ ins., set in a mound of stone, mkd. $\frac{1}{4}$ on N. face; from which

- A pine, 24 ins. diam., bears S. 82° W., 58 lks.
dist., dimly mkd. S BT

No evidence was found of the NE. bearing tree.

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, orig. stone buried on W. side of post; brass cap mkd.

T26S R26E

$\frac{1}{4}$ $\frac{S29}{S32}$

1965

from which I mark

- A pine, 9 ins. diam., bears N. 71° E., 12 lks.
dist., mkd. $\frac{1}{4}$ S29 BT
- A pine, 8 ins. diam., bears S. 10° W., 31 lks.
dist., mkd. $\frac{1}{4}$ S32 BT

Corner is located on an E. slope in scattered timber; W. 40 lks. dist. of small draw, draining SE., and about 4 chs. N. of a pole fence, bearing NW. and SE.

At the cor. of secs. 29, 30, 31, and 32, marked by a sandstone, $18 \times 8 \times 6$ ins., mkd. 1 notch on S., and 5 notches on E. edge, firmly set in a mound of stone; from which

- A pine, 31 ins. diam., bears N. $54^{\circ} 45'$ E., 73 lks.
dist., mkd. S29 BT
- A pine, 23 ins. diam., bears S. $82\frac{1}{2}^{\circ}$ E., 55 lks.
dist., mkd. S32 BT
- A pine, 23 ins. diam., bears S. $67\frac{1}{2}^{\circ}$ W., 28 lks.
dist., mkd. S31 BT

At cor. point

Remonumentation of Corners in T. 26 S., R. 26 E.

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, orig. stone buried on W. side of post; brass cap mkd.

T26S R26E
S30 | S29
S31 | S32

1965

No suitable trees available for new bearing trees.

Corner is located on a NW. slope in heavy oak brush and scattered pines; an old logging road, bearing NW. and SE. is S. of cor. about 2 chs. dist.

At the ¼ sec. cor. of secs. 29 and 30, marked by a sandstone, 18x12x8 ins., firmly set in a mound of stone, mkd. ¼ on W. face; from which

- A pine, 24 ins. diam., bears S. 83° E., 54 lks. dist., mkd. ¼ S BT
- A pine, 26 ins. diam., bears N. 73½° W., 15 lks. dist., mkd. ¼ S BT

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, orig. stone buried on W. side of post; brass cap mkd.

T26S R26E
¼
S30 | S29
1965

from which I mark

- A pine, 6 ins. diam., bears S. 25° E., 58 lks. dist., mkd. ¼ S29 BT
- A pine, 14 ins. diam., bears S. 54° W., 31 lks. dist., mkd. T26S R26E ¼ S30 BT

Corner is located on a SE. slope in oak brush, and scattered pines, about 2 chs. E. of old logging road, bearing N. and S.

At the cor. of secs. 19, 20, 29, and 30, marked by a sandstone, 18x14x5 ins., firmly set in a mound of stone, mkd. 2 notches on S., and 5 notches on E. edge; from which

- A pine, 16 ins. diam., bears N. 65° E., 45 lks. dist., mkd. T26S R26E S20 BT
- A pine, 30 ins. diam., bears N. 82½° W., 39 lks. dist., mkd. T26S R26E S19 BT

There is no remaining evidence of the other 2 bearing trees.

At cor. point

Remonumentation of Corners in T. 26 S., R. 26 E.

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, orig. stone buried on W. side of post; brass cap mkd.

T26S R26E
 $\frac{S19}{S30}$ | $\frac{S20}{S29}$

1965

from which I mark

A pine, 6 ins. diam., bears S. 38° E., 111 lks. dist., mkd. S29 BT

A pine, 8 ins. diam., bears S. 2° W., 129 lks. dist., mkd. T26S R26E S30 BT

Corner is located on a gradual SE. slope in heavy oak brush, and scattered timber, about $1\frac{1}{2}$ chs. N. of a pole fence, bearing NW. and SE.

At the $\frac{1}{2}$ sec. cor. of secs. 19 and 20, which is re-established at record bearing and distance from orig. bearing trees; there is no remaining evidence of the aspen post cor. monument; from reestablished cor. point

An aspen, 9 ins. diam., bears S. 87° E., 10 lks. dist., mkd. S20 BT

An aspen stump, 8 ins. diam., bears N. $52\frac{1}{2}^{\circ}$ W., 19 lks. dist.; no mks. remaining.

At reestablished cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground to rock, and supported in a large mound of stone; brass cap mkd.

T26S R26E
 $\frac{1}{2}$
 $\frac{S19}{S20}$

1965

from which I mark

An aspen, 11 ins. diam., bears N. 40° E., 64 lks. dist., mkd. $\frac{1}{2}$ S20 BT

No other tree available for bearing tree.

Corner is located on a NW. slope, on E. side of grassy flat, and about 3 chs. dist. E. of draw, drains SW.

At the cor. of secs. 17, 18, 19, and 20, marked by a sandstone, $16 \times 14 \times 7$ ins., firmly set, mkd. 3 notches on S., and 5 notches on E. edge; from which

An aspen, 9 ins. diam., bears S. 1° E., 67 lks. dist., mkd. in bark T26S R26E S20 BT (record S. $46^{\circ} 45'$ E., 42 lks.)

Remonumentation of Corners in T. 26 S., R. 26 E.

CHAINS

An aspen, 16 ins. diam., bears N. 17° W.,
 89 lks. dist., mkd. in bark T26S R26E
 S18 BT (record: N. 73½° W., 84 lks.)
 An aspen, 8 ins. diam., bears S. 53° W.,
 41 lks. dist., mkd. in bark, T26S R26E
 S19 BT (this tree was not recorded in the
 record)

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins.
 in the ground, orig. stone buried on W. side of post;
 brass cap mkd.

T26S R26E	
S18	S17
S19	S20
1965	

from which I mark

An aspen, 8 ins. diam., bears N. 43° E., 65 lks.
 dist., mkd. T26S R26E S17 BT
 An aspen, 14 ins. diam., bears S. 20° E., 65 lks.
 dist., mkd. T26S R26E S20 BT
 An aspen, 8 ins. diam., bears S. 70° W., 54 lks.
 dist., mkd. T26S R26E S19 BT
 An aspen, 14 ins. diam., bears N. 56° W., 68 lks.
 dist., mkd. T26S R26E S18 BT

Corner is located on a SE. slope, in heavy clump of aspen;
 about 8 chs. dist. NW. of draw, drains SW.

T. 27 S., R. 26 E.

Township 27 South, Range 26 E., Salt Lake Meridian, is
 situated partly within the Manti-Lasal National Forest,
 Lasal Division; the subdivisional lines were surveyed
 by E. Beuttner, in 1880.

At the ¼ sec. cor. of secs. 16 and 17, marked by a sand-
 stone, 16x13x10 ins., firmly set, mkd. ¼ on W. face;
 from which

A pine, 36 ins. diam., bears S. 9½° W., 155 lks.
 dist., mkd. ¼ S BT

No evidence was found of the other bearing tree.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins.
 in the ground, orig. stone buried on W. side of post;
 brass cap mkd.

T27S R26E	
¼	
S17	S16
1965	

from which I mark

Remonumentation of Corners in T. 27 S., R. 26 E.

CHAINS

- A pine, 14 ins. diam., bears S. 83° E., 77 lks.
dist., mkd. $\frac{1}{4}$ S16 BT
- A pine, 12 ins. diam., bears S. 5° W., 19 lks.
dist., mkd. $\frac{1}{4}$ S17 BT

Corner is located on NE. slope, in heavy oak brush, and scattered pine timber; 40 lks. E. of a fence bearing N. and S., and about 1 ch. S. of creek, draining SE. Old sawmill site, bears E. about 4 chs. dist.

At the cor. of secs. 8, 9, 16, and 17, marked by a sandstone, 18x12x5 ins., mkd. 4 notches on two cornering edges, lying on the ground; from which

- A pine, 36 ins. diam., bears S. 39° W., 39 lks.
dist., mkd. S17 BT
- A pine, 15 ins. diam., bears N. 9° W., 60 lks.
dist., mkd. with dim illegible scribe mkd.

At cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, orig. stone buried on W. side of post; brass cap mkd.

T27S R26E	
S8	S9
S17	S16

1965

from which I mark

- A pine, 12 ins. diam., bears N. 29° E., 61 lks.
dist., mkd. T27S R26E S9 BT
- A pine, 17 ins. diam., bears S. 15° E., 121 lks.
dist., mkd. T27S R26E S16 BT
- A pine, 15 ins. diam., bears N. 85° W., 100 lks.
dist., mkd. T27S R26E S8 BT

No tree available in the SW. quadrant.

Corner is located on SW. slope in heavy oak brush, and scattered pine timber; a fence bearing N-S is W. of cor. 20 lks. dist.

At the cor. of secs. 5, 6, 7, and 8, marked by a granite stone, 18x14x10 ins., mkd. with 5 notches on two cornering edges, lying on the ground; from which

- Base of 30 in. fallen pine, bears N. 41° E.,
183 lks. dist., blazed, mks. overgrown.
- A pine, 26 ins. diam., bears N. 20° W., 149 lks.
dist., mkd. T27S R26E S6 BT

No evidence of the SW. bearing tree found.

At cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, orig. stone buried on W. side of post; brass cap mkd.

Remonumentation of Corners in T. 27 S., R. 26 E.

CHAINS

T27S R26E	
S 6	S 5
S 7	S 8

1965

from which I mark

A pine, 15 ins. diam., bears N. 47° E., 54 lks. dist., mkd. T27S R26E S5 BT

A pine, 15 ins. diam., bears N. 58° W., 107 lks. dist., mkd. T27S R26E S6 BT

No other trees available.

Corner is located on a gradual NE. slope, 3 lks. E. of fence from N., extends S. for 10 lks. dist. to junction with fences bears E. and W.

CERTIFICATE OF SURVEY

I, LaVern Griffin, survey technician, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 15 day of February, 1961, I have remonumented corners in Townships 26 South, Ranges 23 and 26 East, Township 25 South, Range 24 East, and Township 27 South, Range 27 East,

of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

December 6, 1965
(Date)

LaVern Griffin
(Cadastral Surveyor)

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

SUBMITTED FOR APPROVAL
Date MAR 17 1966

BUREAU OF LAND MANAGEMENT,
Washington, D. C.

The foregoing field notes of the remonumentation of corners in Townships 26 South, Ranges 23 and 26 East, Township 25 South, Range 24 East, and Township 27 South, Range 26 East,

executed by LaVern Griffin, Survey Technician having been critically examined and found correct, are hereby approved.

MAY 5 1966
(Date)

E. L. Lemington
(Chief, Division of Engineering) NCS

CERTIFICATE OF TRANSCRIPT

I CERTIFY That the foregoing transcript of the field notes of the above-described surveys in _____, is a true copy of the original field notes.

(Date)

(Chief, Division of Engineering)

Blank

Page

Blank

Page

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

517

ORIGINAL
FIELD NOTES

OF THE

REMONUMENTATION OF CORNERS

IN

TOWNSHIP 15 SOUTH, RANGE 6 EAST

TOWNSHIP 16 SOUTH, RANGE 6 EAST

TOWNSHIP 17 SOUTH, RANGE 6 EAST

TOWNSHIP 17 SOUTH, RANGE 7 EAST

Of the SALT LAKE Meridian,

In the State of UTAH

EXECUTED BY

Andrew Nelson

Cadastral Surveyor

Under special instructions dated February 15, 19 61, which provided for the surveys
included under Group Number 447, approved February 16, 1965,
and assignment instructions dated July 16, 19 65.

Survey commenced August 17, 19 65

Survey completed August 27, 19 65

DEPT. OF THE INTERIOR
BUR OF LAND MGMT

1966 MAY 11 PM 1 25 3

RECEIVED
STATE & LAND OFFICE
SALT LAKE CITY, UTAH


INDEX DIAGRAM

Township _____, Range _____,

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
20	29	28	27	26	25
31	30	28	24	25	26

CORNER REMONUMENTATION
INDEX DIAGRAM

Township 15 South, Range 6 East, Salt Lake Meridian

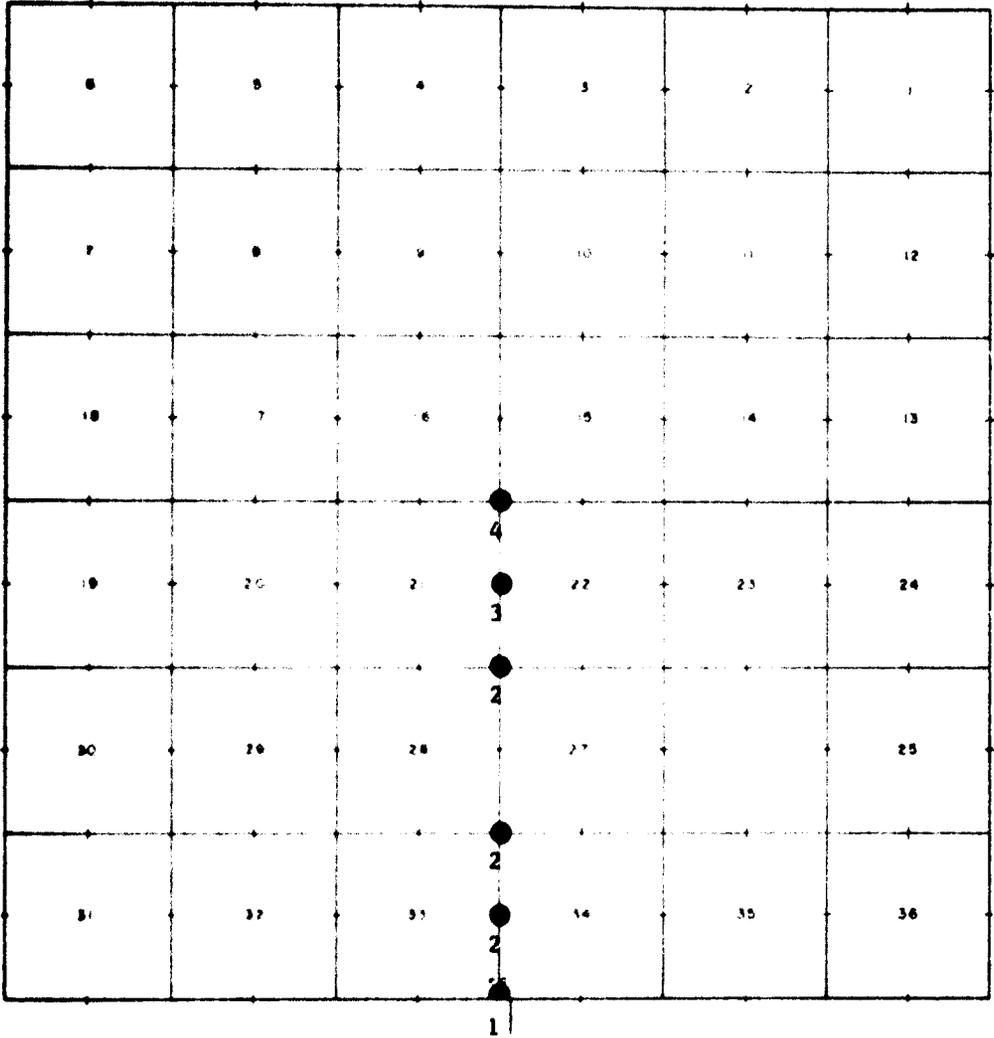


Blank

Page

CORNER REMONUMENTATION
INDEX DIAGRAM

Township 16 South, Range 6 East, Salt Lake Meridian

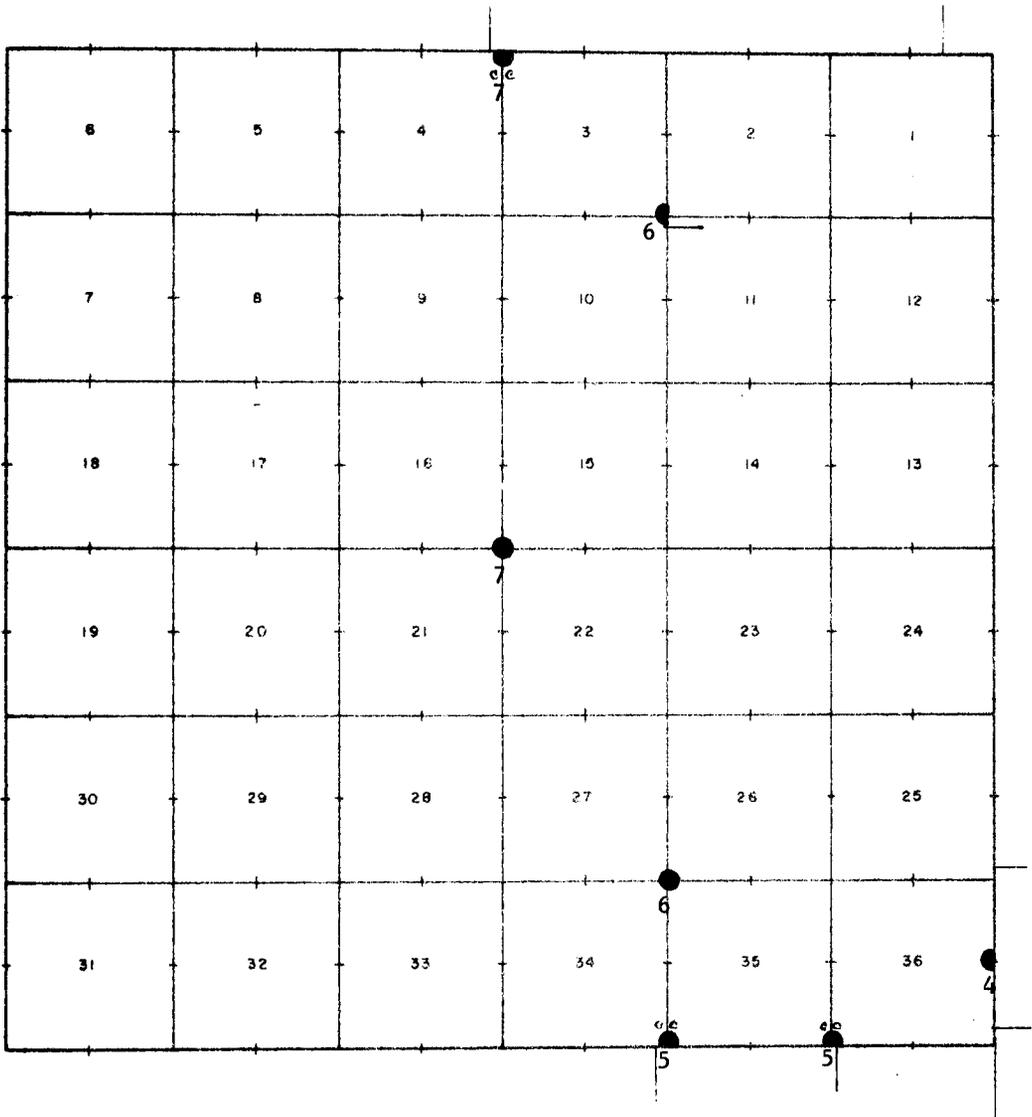


Blank

Page

CORNER REMONUMENTATION
INDEX DIAGRAM

Township 17 South, Range 6 East, Salt Lake Meridian

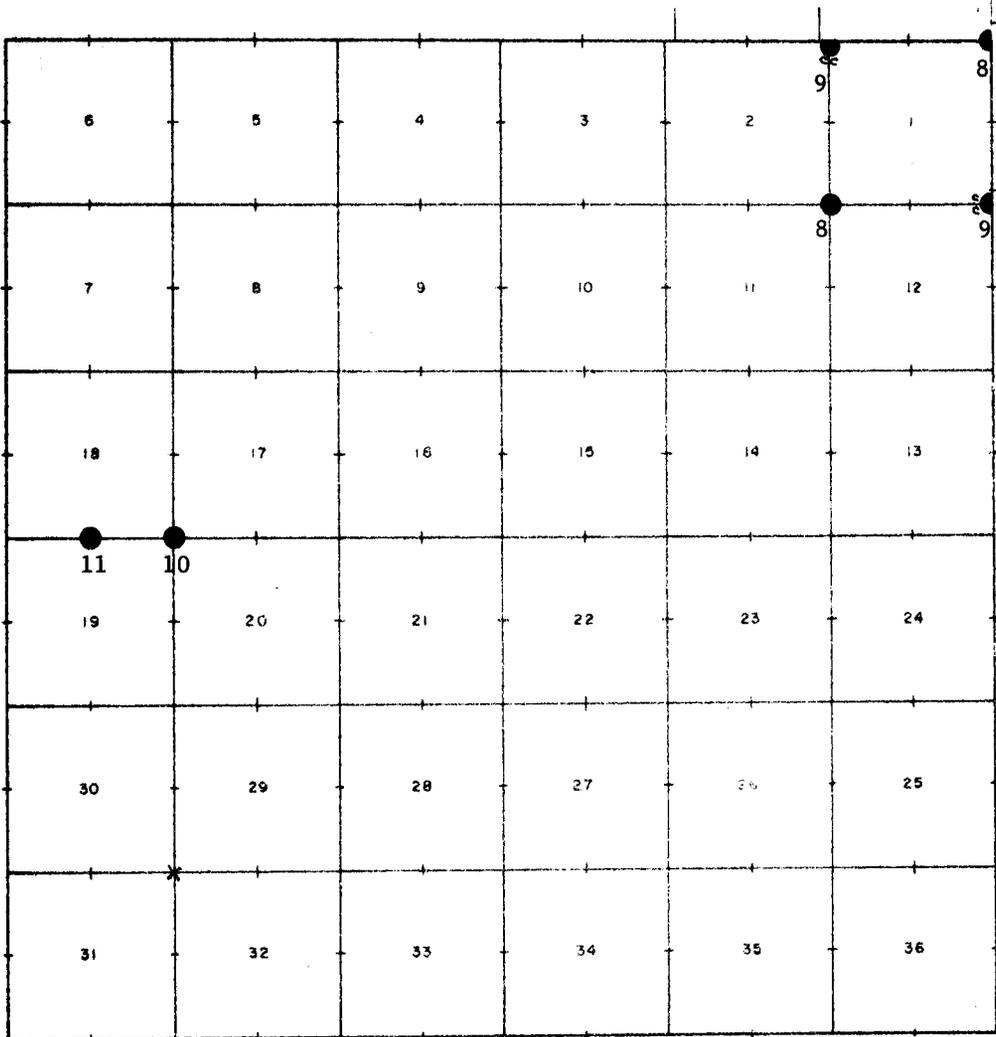


Blank

Page

CORNER REMONUMENTATION INDEX DIAGRAM

Township 17 South, Range 7 East, Salt Lake Meridian

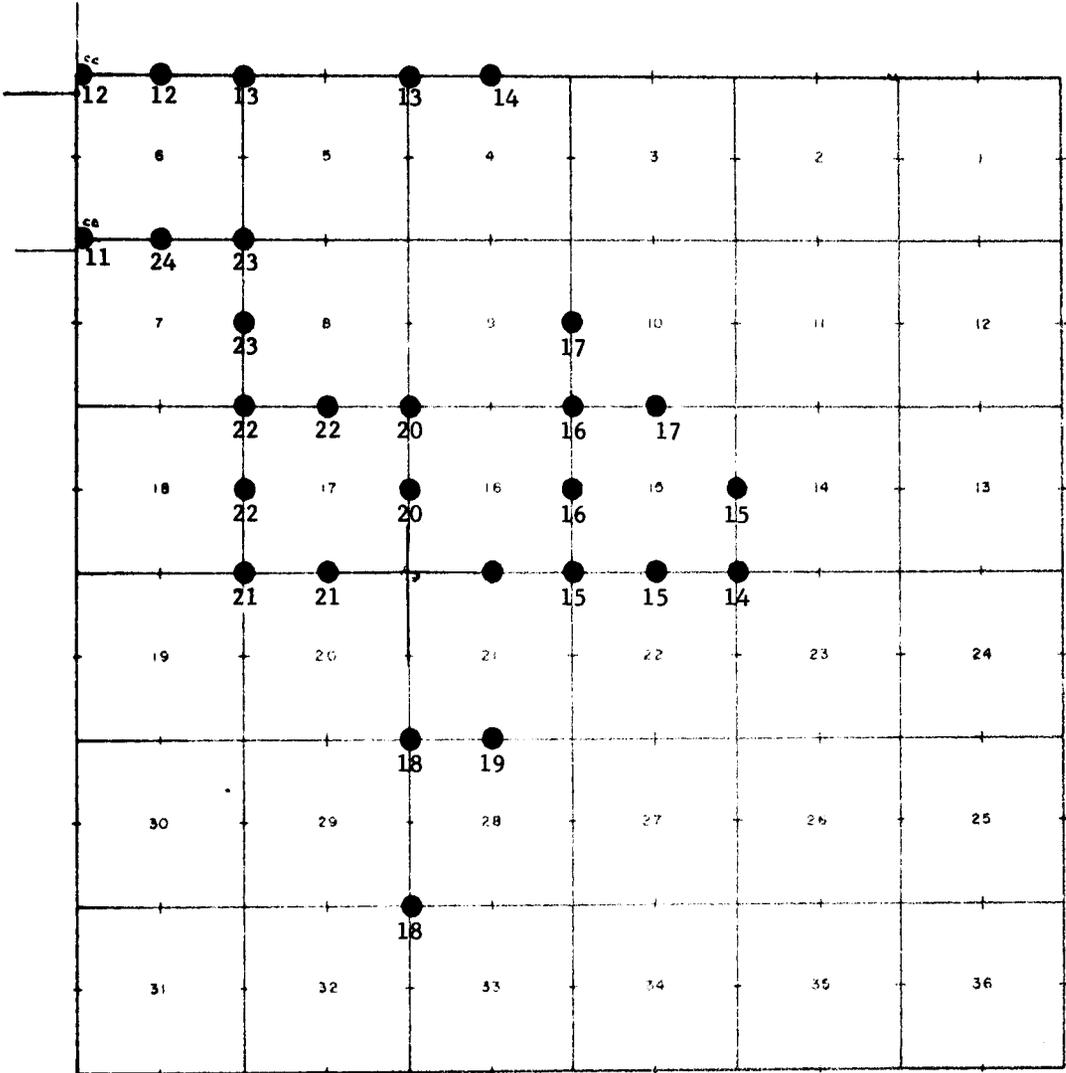

Blank

Page

Remonumentation of Corners in T. 15 S., R. 6 E.

CHAINS

The following field notes are those of the remonumentation of certain identified original corners selected by the U. S. Forest Service as being adjacent to or controlling the boundaries of Forest Service Lands, situated in the MANTI-LASAL NATIONAL FOREST (MANTI DIVISION), in the following townships:

- T. 15 S., R. 6 E., Salt Lake Mer.
- T. 16 S., R. 6 E.,
- T. 17 S., R. 6 E., and
- T. 17 S., R. 7 E.

The position of each corner was marked by the original monument or determined from corner accessories recorded in the survey record. The monumentation was requested by and accomplished in cooperation with the Forest Service.

T. 15 S., R. 6 E.

Township 15 South, Range 6 East, Salt Lake Meridian, is situated within the Manti-Lasal National Forest: the S. boundary (3rd Standard Parallel South) was surveyed by A. D. Ferron in 1872-73; James C. Dick, in 1900, re-surveyed the standard parallel, and surveyed the subdivisions of the Tp.

At the closing cor. of secs. 33 and 34, on the S. bdy. of Tp., marked by a sandstone, 22x16x8 ins., firmly set in the ground, mkd. CC on N., 3 notches on E. and W. sides; no evidence was found of the 2 aspen bearing trees recorded.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, orig. stone buried on N. side of post; brass cap mkd.

CC	
T15S	R6E
S33	S34
S 4	
T16S	
1965	

from which I mark

- An aspen, 8 ins. diam., bears N. 30° E., 34 lks. dist., mkd. T15S R6E S34 CC BT
- An aspen, 9 ins. diam., bears N. 54° W., 60 lks. dist., mkd. T15S R6E S33 CC BT

W. 4 lks. dist. from closing cor. is a County line marker between Sanpete and Emery Counties; a sandstone showing 24x12x6 ins. above ground, mkd. SPC on NW., and EC on E. side.

The above closing cor. is W., 2.72 chs. (measured) dist. from the closing cor. of secs. 3 and 4, T. 16 S., R. 6 E.

Corner is located on a gradual W. slope in clump of aspen timber, about 4 chs. N. of a dirt road bearing nearly E. and W.

Remonumentation of Corners in T. 15 S., R. 6 E.

CHAINS

At the 1/4 sec. cor. of secs. 33 and 34, marked by a sandstone, 16x8x4 ins., firmly set, mkd. 1/4 on W. face; witnessed by a small mound of stone, W. of cor.

At cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, orig. stone buried on E. side of post; brass cap mkd.

1/4
T15S R6E
S33 S34

1965

Raise a large mound of stone around cor.

N. of cor. 5 ft. dist. is a county line marker between Sanpete and Emery Counties, a sandstone showing 16x14x9 ins. above ground, mkd. SPC on W., and EC on E. face.

Corner is located on a gradual E. slope, in open sagebrush, in Scad Valley; about 4 chs. W. of draw, drains N., and about 3 chs. E. of dirt road through valley.

At the cor. of secs. 27, 28, 33 and 34, marked by a sandstone, 20x16x4 ins., firmly set, mkd. 1 notch on S. and 3 notches on E. edge; witnessed by a small mound of stone, W. of cor.

At cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, orig. stone buried on E. side of post; brass cap mkd.

T15S R6E
S28 S27
S33 S34

1965

Raise a mound of stone around cor.

N. of cor. 3 ft. dist. is a county line marker between Sanpete and Emery Counties; a sandstone showing 20x10x8 ins. above ground, mkd. SPCo on W. and ECo on E. face.

Corner is located on E. slope in open valley; edge of aspen timber bears N. about 5 chs., and W. 3 1/2 chs. dist. from cor.

At the cor. of secs. 21, 22, 27, and 28, marked by a sandstone, 20x16x4 ins., loosely set, and dimly mkd. from which

- An aspen, 14 ins. diam., bears N. 35° E., 79 lks. dist., with illegible scribe mks. in the bark.
- An aspen, 10 ins. diam., bears S. 53° E., 22 lks. dist., mkd. T15S R6E S27 BT in the bark.

Remonumentation of Corners in T. 15 S., R. 6 E.

CHAINS

No evidence was found of the other 2 aspen bearing trees.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, orig. stone buried on W. side of post; brass cap mkd.

T15S	R6E
<u>S21</u>	<u>S22</u>
S28	S27

1965

from which I mark

- A spruce, 19 ins. diam., bears S. 79° E., 67 lks. dist., mkd. T15S R6E S27 BT
- An aspen, 10 ins. diam., bears S. 5° W., 41 lks. dist., mkd. T15S R6E S28 BT
- An aspen, 8 ins. diam., bears N. 24° W., 27 lks. dist., mkd. S21 BT

N. of cor. 4 lks. dist. is a county line marker between Sanpete and Emery Counties; a sandstone showing 24x14x6 ins. above ground, mkd. SPCo on W. and ECo on E. face.

Corner is located on a gradual N. slope in scattered aspen timber, about $\frac{1}{4}$ mile S. of small stream, drains NE.

At the $\frac{1}{4}$ sec. cor. of secs. 21 and 22, marked by a sandstone, 14x10x6 ins., firmly set, mkd. $\frac{1}{4}$ on W. face; witnessed by a small mound of stone, W. of cor.

No evidence was found of the 1 aspen bearing tree recorded.

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, orig. stone buried on W. side of post; brass cap mkd.

	$\frac{1}{4}$
T15S	R6E
<u>S21</u>	<u>S22</u>

1965

from which I mark

- An aspen, 9 ins. diam., bears N. 75° W., 101 lks. dist., $\frac{1}{4}$ S21 BT

Raise a mound of stone around cor., and set steel fence post, 2 lks. E. of cor.

Corner is located on a gradual E. slope in sagebrush, near W. side of open valley; W. of cor. 45 lks. dist. is a dirt road, bearing nearly N. and S.

Remonumentation of Corners in T. 15 S., R. 6 E.

CHAINS

At the cor. of secs. 15, 16, 21, and 22, marked by a sandstone, 18x12x10 ins., mkd. 15S on NE., 6E and SE., and 3 notches on S. edge, other mks. eroded; stone found lying on the ground at cor. of wire fences bearing N. and E..

At cor. point, at SW. cor. of fences.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, orig. stone buried on W. side of post; brass cap mkd.

T15S	R6E
S16	S15
S21	S22

1965

Raise a mound of stone around cor., and set steel fence post, 3 lks. W. of cor.

S. 4 lks. of cor. is a county line marker between Sanpete and Emery Counties; a sandstone, showing 18x14x12 ins. above ground, mkd. SPCo on W., and ECo on E. face.

Corner is located on a gradual SE. slope, at cor. of fences, in Scad Valley; main valley road, bearing generally N. and S., bears W. of cor. about 4 chs. dist.

T. 16 S., R. 6 E.

Township 16 South, Range 6 East, Salt Lake Meridian, is situated within the Manti-Lasal National Forest; the N. bdy. (3rd Standard Parallel S.) was surveyed by A. D. Ferron, in 1872-73, and resurveyed by James C. Dick, in 1900; the S. bdy. was surveyed by Ferron in 1885, and resurveyed by Dick in 1900; the E. bdy. was surveyed by Dick in 1900; partial survey of the subdivisions were executed by Ferron in 1891; completion survey of the subdivisions were made by Dick in 1900.

At the ¼ sec. cor. of sec. 36, on E. bdy. of Tp., originally set as a common cor. for secs. 31 and 36; corner stone missing, point reestablished at record bearing and dist. from orig. SE. bearing tree:

An aspen 12 ins. diam., bears S. 87° E., 160 lks. dist., mkd. S 31 BT

There is no remaining evidence of the NW. bearing tree.

At reestablished cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of rock; brass cap mkd.

T16S	
R6E	
¼	
S36	

1965

from which I mark

Remonumentation of Corners in T. 16 S., R. 6 E.

CHAINS

A spruce, 9 ins. diam., bears S. 69° W., 62 lks.
dist., mkd. $\frac{1}{2}$ S36 BT

Corner is located on a gradual E. slope in small open park, about 6 chs. in length N. and S., and $2\frac{1}{2}$ chs. wide, E. and W.

At the closing cor. of secs. 35 and 36, on the S. bdy. of Tp., marked by a sandstone, 15x12x3 ins., firmly set in the ground, plainly mkd. CC on N., 1 groove on E., and 5 grooves on W. face; from which

A fir, 14 ins. diam., bears S. 65° E., 11 lks.
dist., blazed, mks. overgrown. (record N. $36\frac{1}{2}^{\circ}$ E., 18 lks.)

A fir, 9 ins. diam., bears S. 66° W., 18 lks.
dist., blazed, mks. overgrown. (record N. 48° W., 35 lks.)

These bearing trees apparently refer for closing cor. of secs. 1 and 2, on N. bdy. T. 17 S., R. 6 E., which is E. 10 lks. dist. of above cor.

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, orig. stone buried on S. side of post, and in a mound of stone; brass cap mkd.

CC	
T16S	R6E
S35	S36
S2	
T17S	
1965	

from which I mark

A fir, 10 ins. diam., bears N. 33° E., 5 lks.
dist., mkd. T16S R6E S36 CC BT

A fir, 18 ins. diam., bears N. 67° W., 64 lks.
dist., mkd. CC S35 BT

Corner is located on steep W. slope in medium dense timber; about 30 lks. E. of old logging road, and N. about 3 chs. dist. from fork of roads, bearing N., and NE., from S.

At the closing cor. of secs. 34 and 35, on S. bdy. of Tp., marked by a sandstone, 18x12x5 ins.; firmly set, mkd. CC on N., 2 grooves on E., and 4 grooves on W. face; there is no remaining evidence of the 1 orig. bearing tree.

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, orig. stone buried on N. side of post, and in small mound of stone; brass cap mkd.

Remonumentation of Corners in T. 16 S., R. 6 E.

CHAINS

CC	
T16S	R6E
S34	S35
S2	
T17S	
1965	

from which I mark

An aspen, 5 ins. diam., bears N. 22° E., 31 lks. dist., mkd. CC BT

An aspen, 6 ins. diam., bears N. 43° W., 35 lks. dist., mkd. T16S R6E S34 CC BT

Corner is located on steep E. slope in aspen timber; about 3½ chs. dist. W. of dirt road in Cottonwood Canyon, bearing nearly N. and S.

At the cor. of secs. 26, 27, 34 and 35, marked by a sandstone, 18x13x3 ins., firmly set, mkd. 1 notch on S. and 2 notches on E. edge; from which

An aspen, 13 ins. diam., bears S. 26° E., 13 lks. dist., mkd. in bark, T16S R6 S35 BT

There is no remaining evidence of the other 3 orig. bearing trees.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground to rock, orig. stone buried on S. side of post, and in a mound of stone to top; brass cap mkd.

T16S R6E	
S27	S26
S34	S35

1965

from which I mark

An aspen, 13 ins. diam., bears N. 50° E., 42 lks. dist., mkd. S26 BT

An aspen, 13 ins. diam., bears S. 32° W., 7 lks. dist., mkd. S34 BT

An aspen, 12 ins. diam., bears N. 53° W., 21 lks. dist., mkd. T16S R6E S27 BT

Corner is located on a W. slope in aspen timber, about 1½ chs. E. of wash in Cottonwood Canyon, and about 2 chs. E. of road.

At the cor. of secs. 3 and 10, marked by a sandstone, 16x10x6 ins., firmly set, mkd. 5 notches on S. and 2 notches on E. edge; from which

An aspen, 10 ins. diam., bears S. 37° W., 30 lks. dist., mkd. T16S R6E S10 BT

An aspen, 14 ins. diam., bears N. 44° W., 15 lks. dist., mkd. T16 S R6E S3 BT

At cor. point

Remonumentation of Corners in T. 16 S., R. 6 E.

CHAINS

Set an iron post, 30 ins. diam., 2½ ins. diam., 24 ins. in the ground, orig. stone buried alongside of post; brass cap mkd.

T16S	
S3	
S10	S2
T6E	

1965

from which I mark

An aspen, 8 ins. diam., bears S. 61° W., 45 lks. dist., mkd. S10 BT

An aspen, 9 ins. diam., bears N. 73° W., 20 lks. dist., mkd. S3 BT

Corner is located on a steep S. slope in aspen timber. Note: No evidence was found of the closing cor. of secs. 2 and 11, which by record is S. 5.52 chs. dist. from above cor.

At the cor. of secs. 15, 16, 21, and 22, marked by a sandstone, 15x10x6 ins., firmly set, mkd. 3 notches on S. and E. edges; no accessories.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, orig. stone buried on W. edge of post; brass cap mkd.

T16S R6E	
S16	S15
S21	S22

1965

Set steel fence post, 2 lks. NW. of cor.

Corner is located on nearly level ground, at cor. of wire fences, bearing S. and E.; S. 1.70 chs. dist. of dirt road bearing E. and W., and about 1 ch. E. of Spoon Creek; in Upper Joes Valley.

At the closing cor. of secs. 3 and 4, on the N. bdy. (3rd Stan. Par. S.) of Tp., mkd. by a sandstone, 16x14x4 ins., firmly set, mkd. CC on S., 3 notches on E. and W. faces; no accessories. The orig. record calls for an aspen post as cor. monument.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, cor. stone buried alongside of post; brass cap mkd.

T15S	
S34	
S4	S3
T16S	R6E

CC
1965

Remonumentation of Corners in T. 16 S., R. 6 E.

CHAINS

from which I mark

An aspen, 12 ins. diam., bears S. 19° E., 136 lks. dist., mkd. T16S R6 E S3 CC BT
 An aspen, 9 ins. diam., bears S. 52° W., 92 lks. dist., mkd. T16S R6E S4 CC BT

Corner is located on a gradual W. slope in open sagebrush; scattered aspen in area; a dirt road bearing about E. and W. is S. of cor. about 4 chs. dist. This cor. is E. 2.72 chs. dist. from the closing cor. of secs. 33 and 34, on S. bdy. of T. 15 S., R. 6 E.

T. 17 S., R. 6 E.

Township 17 S., R. 6 E., Salt Lake Meridian, is situated within the Manti-Lasal National Forest: the N. bdy. was surveyed by A. D. Ferron in 1885, and retraced by J. C. Dick in 1900; portion (4 miles) of E. bdy. was surveyed by Ferron in 1885, and completed by Ferron & Jessen in 1892, and retraced by Dick in 1900. A portion (about 12 miles) of the subdivisions was surveyed by Ferron & Jessen in 1892; J. C. Dick, in 1900, completed the surveys of the subdivisions, and also retraced or resurveyed the former surveys.

At the cor. of Tps. 16 and 17 S., R. 6 E., mkd. by a limestone, 20x11x7 ins., firmly set, mkd. with 6 notches on N., S., and W. edges, 16SR6 on NW., and T17S on SW. face; from which

An aspen, 14 ins. diam., bears S. 67° W., 23 lks. dist., mkd. in bark, T17S R6E S1 BT
 A balsam, 18 ins. diam., bears N. 23° W., 67 lks. dist., mkd. in bark, mks. illegible.

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, orig. stone buried on E. edge of post; and in a small mound of stone; brass cap mkd.

T16S	
R6E	
S36	T17S
S1	R7E
T17S	S6
R6E	

1965

from which I mark

A balsam, 10 ins. diam., bears S. 23° W., 10 lks. dist., mkd. T17S R6E S1 BT

Corner is located on a steep NE. slope, in W. edge of aspen and balsam timber.

At the cor. of secs. 1, 2, 11, and 12, mkd. by a sandstone, 15x8x8 ins., firmly set, mkd. 5 notches on S., and 1 notch on E. edge; from which

Remonumentation of Corners in T. 17 S., R. 6 E.

CHAINS

- A dead pine, 24 ins. diam., bears N. 34° E.,
45 lks. dist., mkd. T17S R6E S1 BT
- A pine, 16 ins. diam., bears S. 38° E., 36 lks.
dist., blazed, mks. nearly overgrown.
- A pine, 25 ins. diam., bears S. 1° W., 30 lks.
dist., blazed, (dim scribe mks. visible.
- A dead pine, 15 ins. diam., bears N. 55° W.,
51 lks. dist., mkd. T17S R6E S2 BT

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins.
in the ground, orig. stone buried on S. side of post;
and in a mound of stone; brass cap mkd.

T17S R6E	
S2	S1

S11	S12
1965	

from which I mark

- A balsam, 14 ins. diam., bears N. 35° E., 18 lks.
dist., mkd. S1 BT
- A fir, 9 ins. diam., bears N. 50° W., 13 lks.
dist., mkd. T17S R6E S2 BT

Corner is located on a gradual W. slope in heavy clump of
fir; about 1 ch. S. of dirt road from Cottonwood Canyon
to top of East Mountain, bears NW. and SE.

At the closing cor. of secs. 1 and 12, on E. bdy. of Tp.,
mkd. by a limestone, 17x7x7 ins., firmly set, mkd. CC
on W. face, 5 notches on S. and 1 notch on N. edge; wit-
nessed by a small mound of stone, W. of cor.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins.
in the ground, orig. stone buried on E. edge of post, and
in a small mound of stone; brass cap mkd.

T17S		
C	S1	R7E
C	S12	S7
R6E		
1965		

Set steel fence post, 2 lks. S. of cor.

Cor. is S. 1.47 chs. (measured) of the cor. of secs. 6
and 7, on W. bdy. of T. 17S R7E.

Cor. is located on gentle E. slope, on top of East Mt.;
in dense grass and dead sagebrush.

At the closing cor. of secs. 1 and 2, on N. bdy. of Tp.,
mkd. by a sandstone, 16x11x2 ins., firmly set, mkd. CC
on S., 5 grooves on W., and 1 groove on E. face; from
which

Remonumentation of Corners in T. 17 S., R. 6 E.

CHAINS

- A fir, 6 ins. diam., bears N. 35° E., 18 lks. dist., mkd. with dim, illegible scribe mks. (record S. 74° E., 12 lks.)
 A fir, 14 ins. diam., bears N. 53° W., 7 lks. dist., blazed, shows dim scribe mks. (record S. 65° W., 16 lks.)

These bearing trees apparently refer for closing cor. of secs. 35 and 36, on S. bdy. T. 16 S., R. 6 E., which is W. 10 lks. distant of above cor.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, orig. stone buried on S. edge of post; and in mound of stone; brass cap mkd.

T16S	
S36	
S 2	S 1
T17S	R6E
CC	
1965	

from which I mark

- A fir, 9 ins. diam., bears S. 30° E., 56 lks. dist., mkd. T17S R6E S1 CC BT
 A fir, 12 ins. diam., bears S. 42° W., 41 lks. dist., mkd. CC S2 BT

Corner is located on W. slope, in medium dense timber, about 40 lks. E. of old logging trail.

At the cor. of secs. 17, 18, 19, and 20, mkd. by a small pile of stones (no marked stone could be identified), from which orig. bearing trees:

- A pine, 12 ins. diam., bears N. 76° E., 80 lks. dist., mkd. with dim, illegible scribe mks.
 A red cedar, 14 ins. diam., bears S. 18° E., 58 lks. dist., mkd. T17S R6E S20 BT
 A pinon, 14 ins. diam., bears S. 76° W., 53 lks. dist., mkd. T17S R6E S19 BT
 A red cedar, 12 ins. diam., bears N. 48° W., 25 lks. dist., mkd. T17S R6E S18 BT

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a mound of stone; brass cap mkd.

T17S	R6E
S18	S17
S19	S20

1965

from which I mark

- A red cedar, 15 ins. diam., bears N. 71° E., 85 lks. dist., mkd. T17S R6E S17 BT

Remonumentation of Corners in T. 17 S., R. 6 E.

CHAINS

Corner is located on a steep, shale W. slope, in medium dense cedar and pinon timber, about 10 chs. E. of dirt road along E. side of Lowry Creek.

At the $\frac{1}{2}$ sec. cor. of secs. 18 and 19, mkd. by a sandstone, 15x10x6 ins., firmly set, mkd. $\frac{1}{2}$ on N. face; witnessed by a small mound of stone, W. of cor.

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, orig. stone buried on N. edge of post; brass cap mkd.

	T17S R6E
	S18
$\frac{1}{2}$	S19
	1965

Raise a large mound of stone, around cor.

Corner is located on a gentle N. slope in open land, 3 lks. S. of cor. of wire fences bearing N., E., and W., and E. 58 lks. dist. from fence extending S.; a dirt road along S. side of a fork of Lowry Cr., bears N. of cor. about 7 chs. dist.

T. 17 S., R. 7 E.

Township 17 South, Range 7 East, Salt Lake Meridian, is situated within the Manti-Lasal National Forest; the N. bdy. and the subdivisions were surveyed, and the W. bdy. retraced and resurveyed by James C. Dick, in 1900.

At the cor. of secs. 6 and 7, on the W. bdy. of Tp., mkd. by a limestone, 14x8x7 ins., firmly set, and dimly mkd. with 5 notches on S. and 1 notch on N. edge; witnessed by a small scattered mound of stone.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, orig. stone buried on E. edge of post; brass cap mkd.

	T17S
	S6
S1	S7
R6E	R7E

1965

Raise a mound of stone around cor., and set steel fence post, 2 lks. W. of cor.

Corner is located on slight E. slope, on open grass and dead sagebrush, on top of East Mountain.

Remonumentation of Corners in T. 17 S., R. 7 E.

CHAINS

The closing cor. of secs. 1 and 12, T. 17 S., R. 6 E., is S. 1.47 chs. (measured) from above sec. cor.

At the closing cor. of Tps. 16 and 17 S., R. 7 E., mkd. by a sandstone, 20x15x8 ins., firmly set, mkd. CC and 6 notches on E., 6 notches on N. and S. edges; no accessories. No evidence found of the 2 orig. aspen bearing trees.

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, orig. stone buried on E. edge of post; brass cap mkd.

T16S	T16S	
R6E	R7E	
S36	S31	C
	S6	C
	T17S	
	R7E	

1965

from which I mark

A balsam, 14 ins. diam., bears N. 35° E., 103 lks. dist., mkd. T16S R7E S31 CC BT

A balsam, 9 ins. diam., bears S. 55° E., 25 lks. dist., mkd. T17S R7E S6 CC BT

Corner is located on a gradual NE. slope in aspen and balsam timber; about 2 chs. from W. edge of timber.

At the $\frac{1}{2}$ sec. cor. of secs. 6 and 31, on N. bdy. of Tp., mkd. by a sandstone, 15x8x5 ins., firmly set, mkd. $\frac{1}{2}$ on N. face; no accessories. No evidence found of the 2 aspen bearing trees.

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, orig. stone buried on N. edge of post; brass cap mkd.

T16S	R7E	
$\frac{1}{2}$	S31	
	S6	
	T17S	
	1965	

from which I mark

A balsam, 20 ins. diam., bears N. 22° E., 29 lks. dist., mkd. $\frac{1}{2}$ S31 BT

An aspen, 12 ins. diam., bears S. 58° W., 22 lks. dist., mkd. $\frac{1}{2}$ S6 BT

Corner is located on nearly level ground in scattered timber.

Remonumentation of Corners in T. 17 S., R. 7 E.

CHAINS

At the cor. of secs. 5, 6, 31, and 32, on N. bdy. of Tp., mkd. by a cross (X) with 1 groove on W. and 5 grooves on E., dimly mkd. on top of NW. edge of sandstone boulder in place, showing 8x6x3 ft.; from which

- A fir, 23 ins. diam., bears N. 52° E., 68 lks. dist., mkd. T16S R7E S32 BT
- A fir, 20 ins. diam., bears S. 48° E., 52 lks. dist., mkd. T17S R7E S5 BT
- A fir, 20 ins. diam., bears S. 53° W., 29 lks. dist., mkd. T17S R7E S6 BT
- A fir, 18 ins. diam., bears N. 48° W., 36 lks. dist., mkd. T16S R7E S31 BT

At point 1 lk. W. of the cross on boulder

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground to rock, and in a mound of stone to top; brass cap mkd.

T16S	R7E	
S31	S32	→ W
S 6	S 5	→ C
T17S	R7E	

1965

Corner is located on a steep SW. slope, in heavy pine and fir timber; 15 lks. S. of old E-W wire fence.

At the cor. of secs. 4, 5, 32, and 33, on N. bdy. of Tp., reestablished at record bearing and dist. from the SW. orig. bearing tree; (corner stone missing) from re-established cor. point

- A pine snag, 14 ins. diam., bears S. 28° W., 9 lks. dist., mkd. T17S R7E S5 BT
- A spruce, 18 ins. diam., bears N. 35° E., 75 lks. dist., mkd. only 33 (record N. 26° E., 23 lks.)
- Base of fallen pine, 16 ins. diam., bears S. 87° E., 6 lks. dist., trunk mkd. T17S R7E S4 BT (record S. 50° E., 21 lks.)
- Base of fallen pine, 14 ins. diam., bears N. 12° W., 50 lks. dist., mkd. T16S R7E S32 BT (record N. 44° W., 6 lks.)

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T16S	R7E	
S32	S33	
S 5	S 4	
T17S	R7E	

1965

from which I mark

- A spruce, 8 ins. diam., bears N. 23° E., 56 lks. dist., mkd. S33 BT
- A spruce, 6 ins. diam., bears S. 63° E., 37 lks. dist., mkd. S4 BT

. Remonumentation of Corners in T. 17 S., R. 7 E.

CHAINS

- A spruce, 8 ins. diam., bears S. 51° W., 21 lks. dist., mkd. S5 BT
- A spruce, 17 ins. diam., bears N. 63° W., 83 lks. dist., mkd. T16S R7E S32 BT

Corner is located on steep N. slope, about 2 chs. S. of creek, drains E., in medium dense timber; heavy wind-fall-down timber in vicinity of cor.

At the $\frac{1}{2}$ sec. cor. of secs. 4 and 33, on N. bdy. of Tp., which is reestablished (no evidence of the aspen tree cor. found) at record bearing and dist. from orig. bearing trees: from reestablished cor. point

- An aspen, 8 ins. diam., bears North, 35 lks. dist., mkd. $\frac{1}{2}$ S33 BT
- An aspen, 8 ins. diam., bears S. 0° 30' E., 35 lks. dist., dimly mkd. S4

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T16S R7E

S33

$\frac{1}{2}$ S4

T17SR7E

1965

from which I mark

- An aspen, 8 ins. diam., bears S. 5° E., 30 lks. dist., mkd. $\frac{1}{2}$ S4 BT
- An aspen, 9 ins. diam., bears N. 25° W., 37 lks. dist., mkd. $\frac{1}{2}$ S33 BT

The cor. of wire fences bearing E., W., and S., bears N. 80° E., 65 lks. dist. from cor.; on steep N. slope in aspen timber.

At the cor. of secs. 14, 15, 22, and 23, marked by a sandstone, 20x10x3 ins., firmly set, mkd. 3 notches on S., and 2 notches on E. edge; witnessed by a small mound of stone, W. of cor. A wood post, 6 ft. high is set on N. side of post.

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, orig. stone buried on E. edge of post; brass cap mkd.

T17S R7E

S15 S14

S22 S23

1965

Raise a mound of stone around cor.

Set steel fence post, 2 lks. NE. of cor.

Remonumentation of Corners in T. 17 S., R. 7 E.

CHAINS

Corner is located on a gradual E. slope in open sagebrush, about 2 chs. E. of a dirt road bearing nearly N. and S.; a ravine draining S., bears E. of cor. about 4 chs. dist.

At the $\frac{1}{4}$ sec. cor. of secs. 14 and 15, mkd. by a sandstone, 16x11x4 ins., firmly set in ground, no mks. could be identified, weathered off; witnessed by a small mound of stone, W. of cor.

At cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, orig. stone buried on E. side of post; brass cap mkd.

$\frac{1}{4}$
T17S | R7E
S15 | S14

1965

Place collar of stone around, and raise a mound of stone, W. of cor.

Corner is located on an E. slope, in open sagebrush land, 12 lks. SE. of cor. of wire fences, bearing N., and W.; the N. end of dirt road from the S., bears E. of cor. $\frac{1}{4}$ chs. dist.

At the cor. of secs. 15, 16, 21, and 22, marked by a sandstone, 15x12x8 ins., firmly set, mkd. with 3 notches on all 4 edges, and 17S on NE. face; witnessed by a small mound of stone, W. of cor.

At cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, orig. stone buried on E. edge of post; brass cap mkd.

T17S R7E
S16 | S15
S21 | S22

1965

from which I mark

A spruce, 10 ins. diam., bears N. 50° W., 122 lks. dist., mkd. T17S R7E S16 BT

Corner is located on a gradual E. slope at S. edge of aspen timber, and S. 10 lks. dist. from cor. of wire fences, bearing N., S., and W.

At the $\frac{1}{4}$ sec. cor. of secs. 15 and 22, mkd. by a limestone, 12x11x6 ins., lying on the ground at S. base of small mound of stone, mkd. $\frac{1}{4}$; also a cedar post, 6 ft. high is set 3 lks. E. of cor.

Remonumentation of Corners in T. 17 S., R. 7 E.

CHAINS

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, orig. stone buried on S. edge of post; brass cap mkd.

T17S R 7E

$$\frac{1}{2} \begin{array}{r} \text{S15} \\ \hline \text{S22} \end{array}$$

1965

Place collar of rock around, and raise a mound of stone, N. of cor.; also set a steel fence post, 2 lks. SW. of cor.

Corner is located on a medium steep SW. slope, in grass and scattered sagebrush; about 15 chs. E. of a ravine, draining SE.

At the $\frac{1}{2}$ sec. cor. of secs. 15 and 16, mkd. by a sandstone, 12x12x3 ins., loosely set, mkd. $\frac{1}{2}$ on W. face; no accessories; no evidence of the 2' orig. aspen bearing trees.

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, orig. stone buried on W. edge of post; brass cap mkd.

 $\frac{1}{2}$

$$\begin{array}{r|l} \text{T17S R7E} & \\ \hline \text{S16} & \text{S15} \end{array}$$

1965

from which I mark

A fir, 7 ins. diam., bears N. 85° E., 56 lks. dist., mkd. $\frac{1}{2}$ S15 BT

A fir, 9 ins. diam., bears N. 14° W., $31\frac{1}{2}$ lks. dist., mkd. $\frac{1}{2}$ S16 BT

Corner is located E. 5 lks. dist. of cor. of wire fences bearing N., S., and E.; on a gentle N. slope in scattered aspen and fir timber.

At the cor. of secs. 9, 10, 15, and 16, mkd. by a sandstone, 12x10x8 ins., lying on the ground, mkd. 4 notches on one edge and 3 notches on cornering edge; from which

A cedar, 20 ins. diam., bears N. 79° E., 150 lks. dist., (the record) mkd. T17S R7E S10 BT

A pine, 22 ins. diam., bears S. 49° W., 115 lks. dist., (the record) mkd. S16 BT

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground to rock, and in a large mound of stone; orig. stone buried on S. edge of post; brass cap mkd.

Remonumentation of Corners in T. 17 S., R. 7 E.

CHAINS

T17S R7E	
S9	S10
S16	S15

1965

from which I mark

A spruce, 7 ins. diam., bears S. 1^o E., 74 lks.
dist., mkd. S15 BT

No tree available in NW quadrant.

S. 55^o W., 95 lks. dist. to cor. of wire fences, bearing
S. and E.

Corner is located on a steep, open S. slope, about 1½
chs. N. of Deer Creek, drains NE.; scattered timber.

At the ¼ sec. cor. of secs. 10 and 15, mkd. by a sand-
stone, 15x10x4 ins., lying on the ground, mkd. ¼; from
which

A pine, 23 ins. diam., bears S. 41^o W., 38 lks.
dist., (the record) blazed, mks. overgrown.
Remark ¼ S15 BT

A pine, 36 ins. diam., bears N. 34^o W., 62 lks.
dist., (the record) blazed, mks. overgrown.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins.
in the ground, orig. stone buried on N. edge of post;
brass cap mkd.

T17S R7E	
¼	S10
	S15

1965

from which I mark

A pine, 7 ins. diam., bears N. 44^o E., 47 lks.
dist., mkd. ¼ S10 BT

Corner is located on steep N. slope, in dense timber;
about 5 chs. N. of a logging road.

At ¼ sec. cor. of secs. 9 and 10, mkd. by a sandstone,
14x8x6 ins., firmly set, mkd. ¼ on W. face; from which

A pine, 23 ins. diam., bears S. 33½^o E., 89 lks.
dist., mkd. ¼ S10 BT

A pine, 34 ins. diam., bears S. 1½^o W., 91 lks.
dist., mkd. ¼ S9 BT


At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins.
in the ground to rock, orig. stone buried on N. edge of
post, and in a mound of stone to top; brass cap mkd.

Remonumentation of Corners in T. 17 S., R. 7 E.

CHAINS

T17S R7E



1965

Corner is located on a gradual S. slope, about 4 chs. NW. of draw, draining SE; ridge is N. of cor. about 5 chs. dist.


At the cor. of secs. 28, 29, 32, and 33, mkd. by a limestone, 16x12x4 ins., lying on the ground, mkd. 1 notch on one edge, and 4 notches on cornering edge; from which

- A dead fir, 28 ins. diam., bears N. 33° E., 68 lks. dist., (the record) mkd. T17S R7E S28 BT
- A dead fir, 28 ins. diam., bears S. 65° E., 72 lks. dist., (the record) mks. nearly weathered off.
- A dead fir, 42 ins. diam., bears N. 11° W., 35 lks. dist., (record N. 21½° W., 35 lks.) blazed, mks. overgrown.

There is no remaining evidence of the SW. aspen bearing tree.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground, orig. stone buried on E. edge of post, and in a mound of stone; brass cap mkd.



1965

from which I mark

- A fir, 10 ins. diam., bears N. 85° E., 121 lks. dist., mkd. T17S R7E S28 BT
- A fir, 14 ins. diam., bears S. 1° E., 93 lks. dist., mkd. T17S R7E S33 BT
- A fir, 13 ins. diam., bears S. 41° W., 98 lks. dist., mkd. T17S R7E S32 BT
- A fir, 10 ins. diam., bears N. 20° W., 97 lks. dist., mkd. S29 BT

Corner is located on gentle E. slope, 2 lks. N. of wire fence bearing N. 60° W., and S. 60° E.; dirt road is E. of cor. about 3 chs. dist.

At the cor. of secs. 20, 21, 28, and 29, mkd. by a sandstone, 14x8x4 ins., firmly set, mkd. 2 notches on S., and 4 notches on E. edge; from which

- An aspen, 7 ins. diam., bears N. 67° E., 9 lks. dist., mkd. T17S R7E S21 BT
- An aspen, 9 ins. diam., bears S. 7° E., 4 lks. dist., mkd. T17S R7E S28 BT

Remonumentation of Corners in T. 17 S., R. 7 E.

CHAINS

An aspen, 9 ins. diam., bears S. 88° W., 36 lks.
dist., mkd. T17S R7E S29 BT
An aspen, 7 ins. diam., bears N. 45° W., 13 lks.
dist., mkd. T17S R7E S20 BT

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins.
in the ground, orig. stone buried on N. edge of post;
brass cap mkd.

$$\begin{array}{r} \text{T17S R7E} \\ \text{S20|S21} \\ \hline \text{S29|S28} \end{array}$$

1965

from which I mark

A fir, 9 ins. diam., bears N. 47° E., 86 lks.
dist., mkd. T17S R7E S21 BT
A fir, 13 ins. diam., bears S. 85° E., 72 lks.
dist., mkd. T17S R7E S28 BT
An aspen, 10 ins. diam., bears S. 23° W., 27 lks.
dist., mkd. T17S R7E S29 BT
An aspen, 9 ins. diam., bears N. 38° W., 10 lks.
dist., mkd. S20 BT

Set steel fence post, 2 lks. W. of cor.

Corner is located on steep N. slope in aspen and fir
timber.

At the $\frac{1}{4}$ sec. cor. of secs. 21 and 28, mkd. by a sand-
stone, 15x11x8 ins., firmly set, mkd. $\frac{1}{4}$ on N. face; from
which

A dead aspen, 8 ins. diam., bears N. 57° W.,
13 lks. dist., mks. in bark illegible.

There is no evidence of the SW. aspen bearing tree.

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins.
in the ground, orig. stone buried on N. edge of post;
brass cap mkd.

$$\begin{array}{r} \text{T17S R7E} \\ \text{\frac{1}{4} \frac{S21}{S28}} \end{array}$$

1965

from which I mark

A fir, 20 ins. diam., bears S. 83° W., 62 lks.
dist., mkd. $\frac{1}{4}$ S28 BT
A fir, 9 ins. diam., bears N. 34° W., 86 lks.
dist., mkd. $\frac{1}{4}$ S21 BT

Raise a mound of stone around cor., and set steel fence
post, 3 lks. S. of cor.

Remonumentation of Corners in T. 17 S., R. 7-E.

CHAINS


Corner is located on an E. slope in grove of aspen and fir timber.

At the 1/4 sec. cor. of secs. 16 and 17, mkd. by a limestone, 14x8x6 ins., mkd. 1/4 on W. face, firmly set; from which

- An aspen snag, 10 ins. diam., bears S. 40° E., 19 lks. dist., no mks. remaining.
- A dead aspen, 7 ins. diam., bears S. 23° W., 17 lks. dist., no mks. remaining.

At cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, orig. stone buried on W. edge of post; brass cap mkd.



from which I mark

- A fir, 10 ins. diam., bears S. 35° E., 45 lks. dist., mkd. 1/4 S16 BT
- A fir, 12 ins. diam., bears N. 85° W., 21 lks. dist., mkd. 1/4 S17 BT

Corner is located on a N. slope in aspen and fir timber.


At the cor. of secs. 8, 9, 16, and 17, which is reestablished (corner stone missing) in its orig. position by record bearing and distance from 3 of the orig. bearing trees; from reestablished cor. point:

- An aspen, 10 ins. diam., bears S. 15° E., 26 lks. dist., mkd. in bark T17S R7E S16 BT
- An aspen, 12 ins. diam., bears S. 47° W., 63 lks. dist., mkd. in bark T17S R7E S17 BT
- A dead aspen, 12 ins. diam., bears N. 16° W., 30 lks. dist., mkd. in bark S8 BT.

There is no evidence of the NE. aspen bearing tree.

At cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, and in collar of rock; brass cap mkd.



from which I mark

- A pine, 18 ins. diam., bears N. 56° E., 77 lks. dist., mkd. T17S R7E S9 BT
- A pine, 9 ins. diam., bears S. 22° E., 30 lks. dist., mkd. T17S R7E S16 BT

Remonumentation of Corners in T. 17 S., R. 7 E.

CHAINS

A fir, 18 ins. diam., bears S. 65° W., 63 lks.
 dist., mkd. T17S R7E S17 BT
 A pine, 12 ins. diam., bears N. 69° W., 54 lks.
 dist., mkd. T17S R7E S8 BT

Corner is located on a gradual N. slope, about 1 ch. S. of draw, draining E.

At the cor. of secs. 17, 18, 19, and 20, mkd. by a sandstone, 14x11x7 ins., lying on the ground, mkd. 3 notches on one edge, and 5 notches on cornering edge; from which

An aspen, 9 ins. diam., bears N. 71° E., 29 lks.
 dist., (the record) mkd. in bark T17S R7E
 S17 BT

There is no evidence of the other 3 aspen bearing trees.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, orig. stone buried on E. edge of post; brass cap mkd.

T17S	R7E
S18	S17
S19	S20
1965	

from which I mark

An aspen, 8 ins. diam., bears N. 42° E., 31 lks.
 dist., mkd. S17 BT
 An aspen, 7 ins. diam., bears S. 40° E., 21 lks.
 dist., mkd. S20 BT
 An aspen, 8 ins. diam., bears S. 20° W., 39 lks.
 dist., mkd. S19 BT
 An aspen, 9 ins. diam., bears N. 41° W., 39 lks.
 dist., mkd. S18 BT
 A fir, 4 ft. diam., bears N. 80° E., about 2½
 chs. dist., not marked.

Set steel fence post, S. of cor.

Corner is located on a gradual SW. slope, in aspen timber; small opening is W. of cor. about 2 chs. dist.

At the ¼ sec. cor. of secs. 17 and 20, mkd. by a limestone, 12x11x3 ins., mkd. ¼ on N. face, loosely set in a small mound of stone; no other accessories.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground to bedrock, orig. stone buried alongside, and in a mound of stone to top; brass cap mkd.

¼	T17S	R7E
	S17	
	S20	
1965		

Remonumentation of Corners in T. 17 S., R. 7 E.

CHAINS

Corner is located on slight N. slope, in open sagebrush on top of East Mountain, about 75 lks. N. of a dirt road bearing westerly, and E. for about $1\frac{1}{2}$ chs. dist. to forks of road, bearing NE., and SE.

At the $\frac{1}{4}$ sec. cor. of secs. 17 and 18, mkd. by a limestone, $16 \times 7 \times 3$ ins., mkd. $\frac{1}{4}$, found lying on the ground at S. base of a small mound of stone; a cedar post, 6 ins. diam., 5 ft. long, is set 5 lks. E. of cor.

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins. in the ground to bedrock, orig. stone buried on W. edge of post, and in a mound of stone to top; brass cap mkd.

$\frac{1}{4}$
T17S | R7E
S18 | S17

1965

Set steel fence post, alongside of cor.

Corner is located on a sagebrush flat, slight E. slope; about 10 chs. W. of a dirt road, bearing NW. and SE.

At the cor. of secs. 7, 8, 17, and 18, mkd. by a sandstone, $15 \times 12 \times 6$ ins., firmly set, mkd. 4 notches on S., and 5 notches on E. edge; witnessed by a small mound of stone, W. of cor.

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, orig. stone buried alongside post; brass cap mkd.

T17S, R7E
 S 7 | S 8
S18 | S17

1965

from which I mark

A pine, 10 ins. diam., bears N. 5° E., 45 lks. dist., mkd. only BT (too scrubby for full mks.)

Corner is located on steep W. slope, in E-W wire fence; W. about 1 ch. dist. from W. edge of bench, and about 3 chs. W. of dirt road.

At the $\frac{1}{4}$ sec. cor. of secs. 8 and 17, mkd. by a sandstone, $12 \times 10 \times 5$ ins., firmly set, mkd. $\frac{1}{4}$ on N. face; from which

An aspen, 12 ins. diam., bears S. 42° W., 13 lks. dist., mkd. in bark S17 BT

An aspen, 8 ins. diam., bears N. 60° W., 11 lks. dist., mkd. in bark S8 BT

Remonumentation of Corners in T. 17 S., R. 7 E.

CHAINS

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, orig. stone buried on N. edge of post; brass cap mkd.

T17S R7E
 $\frac{1}{4}$ $\frac{S8}{S17}$
 1965

from which I mark

- A fir, 32 ins. diam., bears N. 24° E., 103 lks. dist., mkd. $\frac{1}{4}$ S8 BT
- An aspen, 8 ins. diam., bears S. 9° E., 41 lks. dist., mkd. $\frac{1}{4}$ S17 BT

Set steel fence post, E. of cor. 5 lks. dist.

Corner is located on a gradual NE. slope, in aspen timber. Small opening about 3 chs. to the SW.

At the $\frac{1}{4}$ sec. cor. of secs. 7 and 8, mkd. by a white limestone, 14x7x6 ins., loosely set in small mound of stone, mkd. $\frac{1}{4}$ on W. face; no other accessories.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, orig. stone buried alongside of post; brass cap mkd.

$\frac{1}{4}$
 T17S R7E
 S 7 | S 8
 1965

Raise a large mound of stone around cor.

Corner is located on slight E. slope in open grass and sagebrush; a very dim trail road bearing nearly E-W, is S. of cor. about 30 lks. dist.; a wire fence bearing about N-S, bears E. of cor. about 7 chs. dist.

At the cor. of secs. 5, 6, 7, and 8, mkd. by a limestone, 15x10x6 ins., loosely set in small mound of stone, mkd. S notches on S. and E. edges; from which

- An aspen, 16 ins. diam., bears S. 67° E., 25 lks. dist., mkd. T17S R7E S8 BT
- An aspen, 19 ins. diam., bears S. 32° W., 13 lks. dist., mkd. T17S R7E S7 BT
- An aspen, 18 ins. diam., bears N. 55° W., 88 lks. dist., mkd. with dim illegible mks.

There is no evidence of the NE. bearing tree.

At cor. point

Remonumentation of Corners in T. 17 S., R. 7 E.

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, orig. stone buried on E. edge of post; brass cap mkd.

T17S	R7E
S 6	S 5
S 7	S 8

1965

from which I mark

A pine, 21 ins. diam., bears N. 32° E., 140 lks. dist., mkd. T17S R7E S5 BT

A pine, 28 ins. diam., bears S. 53° W., 93 lks. dist., mkd. T17S R7E S7 BT

An aspen, 9 ins. diam., bears N. 66° W., 98 lks. dist., mkd. T17S R7E S6 BT

Raise a mound of stone around cor.

Corner is located on E. slope, 2 lks. N. of wire fence, bears W., and extends E. for 1½ chs. dist., thence turns S.; a dirt road, bearing nearly N-S., bears E. of cor. 90 lks. dist.

At the ¼ sec. cor. of secs, 6 and 7, mkd. by a limestone, 15x7x6 ins., firmly set, mkd. ¼ on N. face; witnessed by a small mound of stone, N. of cor.

At cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground to rock, orig. stone buried on N. edge of post; brass cap mkd.

T17S	R7E
¼	S6
	S7

1965

Raise a mound of stone around cor.

Set steel fence post, 2 lks. S. of cor.

Corner is located on gentle NE. slope, in open land with grass and sagebrush; N. of cor. about 6 chs. dist. is a small ravine, drains E.; SE. of cor. about 5 chs. dist. is fork of dirt roads, bearing NW., SE., and about S. 70° W.

CERTIFICATE OF SURVEY

I, Andrew Nelson, Cadastral Surveyor, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 15 day of February, 1961, I have remonumented corners in Township 15 South, Range 6 East, Township 16 South, Range 6 East, and Townships 17 South, Ranges 6 and 7 East,

of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

December 6, 1965 (Date)

Andrew Nelson (Cadastral Surveyor)

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

SUBMITTED FOR APPROVAL Date MAR 17 1966

BUREAU OF LAND MANAGEMENT, Washington, D. C.

The foregoing field notes of the remonumentation of corners in Township 15 South, Range 6 East, Township 16 South, Range 6 East, and Townships 17 South, Ranges 6 and 7 East,

executed by Andrew Nelson, Cadastral Surveyor having been critically examined and found correct, are hereby approved.

MAY 5 1966 (Date)

Chief, Division of Engineering (Signature) N.S.

CERTIFICATE OF TRANSCRIPT

I CERTIFY That the foregoing transcript of the field notes of the above-described surveys in, is a true copy of the original field notes.

(Date)

(Chief, Division of Engineering)