

Volume

#

R0578

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

DEPT. OF THE INTERIOR
BUREAU OF LAND MGMT.

SEP 2 1966

RECEIVED
STATE & LAND OFFICE
SALT LAKE CITY, UTAH

ORIGINAL
FIELD NOTES

OF THE
DEPENDENT RESURVEY

1

OF

A PORTION OF THE SOUTH BOUNDARY OF TOWNSHIP 20 SOUTH, RANGE 20 EAST

(FOURTH STANDARD PARALLEL SOUTH)

AND

THE SOUTH BOUNDARY

AND

THE SUBDIVISIONAL LINES

OF

TOWNSHIP 21 SOUTH, RANGE 20 EAST

Of the SALT LAKE Meridian,

In the State of UTAH

EXECUTED BY

GERALD W. HOCHSTRASSER

SURVEY TECHNICIAN

Under special instructions dated SEPTEMBER 21, 19 62, which provided for the surveys
included under Group Number 459, approved OCTOBER 1, 1962,
and assignment instructions dated AUGUST 14, 19 63.

Survey commenced JULY 22, 19 64

Survey completed SEPTEMBER 15, 19 64

INDEX DIAGRAM

Township 21 SOUTH, Range 20 EAST
4 3 2

74	73					
6	72 5	54 4	43 8	33 9	22 1	
70	69	53	42	32	21	
7	68 8	52 9	41 10	31 11	20 12	
67	66	51	40	30	19	
18	65 17	50 16	40 15	29 14	18 13	
64	63	50	39	28	17	
19	62 20	48 21	38 22	27 23	16 24	
61	60	47	37	26	15	
30	59 29	46 28	36 27	25 26	14 25	
57	57	45	35	24	13	
31	56 32	44 33	34 34	23 35	12 36	
11	10	9	8	7	6	

Dependent Resurvey of

Township 21 South, Range 20 East

CHAINS

The east $5\frac{1}{2}$ miles of the South boundary of T. 20 S., R. 20 E. (Fourth Standard Parallel South) were surveyed in 1898 by Lewis and Blossom. In 1915 Ralph Gentry surveyed the west $\frac{1}{2}$ mile and resurveyed the east $\frac{1}{2}$ mile of the south boundary of sec. 31, retraced the south boundary of sec. 32 and resurveyed the south boundaries of sections 35 and 36. The South boundary of T. 21 S., R. 20 E., was surveyed by A. D. Ferron in 1884 and independently resurveyed by Lewis and Blossom in 1898. The East boundary was surveyed by A. D. Ferron in 1884, and independently resurveyed by Lewis and Blossom in 1898, and dependently resurveyed by Fred R. Chappell and Glen B. Hatch in 1961. The south $3\frac{1}{2}$ miles of the west boundary were surveyed by A. D. Ferron in 1884, and resurveyed by Lewis and Blossom in 1898, who extended this line north $1\frac{1}{2}$ miles. The north 1 mile of the west boundary was surveyed by R. Gentry in 1915. The west boundary was resurveyed by R. Gentry in 1919. All sections except section 6, were surveyed by Lewis and Blossom in 1898, and section 6 was surveyed by R. Gentry in 1915.

The following field notes are those of the dependent resurvey of a portion of the south boundary of T. 20 S., R. 20 E., S. L. Mer., and the south boundary, and subdivisional lines of Township 21 South, Range 20 East.

Before restoring the corners, the lines of the original survey were retraced and diligent search made for any evidence of the original corners, or other calls of the original field note record.

The rules of proportionate measurement were applied to ascertain the position of the lost corners, but not until exhausting every reasonable possibility of finding direct evidence for the control of each particular corner.

The survey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1947, and special instructions dated September 21, 1962.

All lines of this survey were run by direct method where the lines were accessible; lines inaccessible were run by traverse or triangulation methods. Distances to topography on lines run by triangulation or traverse methods are approximately as scaled from reliable U. S. G. S. topographic sheets. The details of such triangulations or traverses have been thoroughly checked and verified, and in order to simplify the record the diagrams and reductions are omitted from these field notes.

The direction of the lines of this survey were determined by reference to true meridians established on line by altitude observations on the sun. The lines were carried forward by sustained angulation being supplemented by other altitude observations on the sun taken throughout the progress of the survey.

The geographic position for the southeast corner of the township is at latitude $38^{\circ} 56' 03.1''$ N., and longitude $109^{\circ} 38' 50.8''$ W., as determined from section line ties to U.S.C. and G.S. triangulation station "Thompson," at latitude $38^{\circ} 57' 52.478''$ N. and longitude $109^{\circ} 42' 40.496''$ W., located N. $40^{\circ} 51' E.$, 9.04 chs. dist. from the $\frac{1}{2}$ section corner of sections 21 and 28, Township 21 South Range 20 East.

Dependent Resurvey of
Township 21 South, Range 20 East

CHAINS

The magnetic declination was read at several stations throughout the township and the average of these readings was found to be 15° East.

Dependent Resurvey of a Portion of the S. Bdy. (Fourth Standard Parallel South), Township 20 South, Range 20 East.

Reestablishment of the Survey Executed by
R. Gentry in 1915

Beginning at the standard $\frac{1}{4}$ sec. cor. of sec. 35, T. 20 S., R. 20 E., monumented with an iron post, 1 in. diam., broken and badly rusted, with brass cap mkd. as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 16 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

SC
T20S R20E
 $\frac{1}{4}$ S35

1964

Thence west, along the S. bdy. of sec. 35.

Over broken, mountainous land through scattered juniper and pinon timber, with scattered shadscale and grass undergrowth. Desc. 80 ft. over broken SW. slope.

- 4.20 Draw, drains SW.; asc. 25 ft. over SE. slope.
- 7.10 Spur, slopes SW., thence by triangulation, desc. about 40 ft. over W. slope.
- 11.50 Canyon, drains S.; asc. 40 ft. over E. slope.
- 13.50 Point of spur, slopes sharply SE.; asc. about 120 ft. along broken S. slope.
- 23.00 Top of ascent, slopes S.; desc. 80 ft. over SW. slope.
- 28.00 Draw, drains SE.; asc. about 150 ft. over broken E. slope.
- 34.44 The closing cor. of secs. 2 and 3, hereinafter described. End triangulation. Asc. 260 ft. over series of broken sandstone ledges facing E.
- 40.50 The standard cor. of secs. 34 and 35, T. 20 S., R. 20 E., monumented with a mound of stone, with no visible marks on stones, but I accept this as a perpetuation of the original cor. point.

Dependent Resurvey of a Portion of the S. Bdy. (Fourth Standard Parallel South), T. 20 S., R. 20 E.

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins. in the ground, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T20S R20E

SC

S34|S35

S3

T21S

1964

Land, broken, mountainous.
Soil, rocky clay.
Timber, scattered juniper and pinon.
Undergrowth, scattered shadscale and grass.

Reestablishment of the Survey Executed by
Lewis and Blossom in 1898

From the standard cor. of secs. 34 and 35.

N. $89^{\circ} 46'$ W., along the S. bdy. of sec. 34.

Over broken, mountainous land through scattered juniper and pinon timber and scattered shadscale and grass undergrowth. Asc. 70 ft. over E. slope.

2.50 Spur, slopes SE., thence along S. slope.

6.60 Spur, slopes S., thence by triangulation; desc. 520 ft. over broken W. slope.

33.75 Point for the N. $\frac{1}{4}$ sec. cor. of sec. 3, T. 21 S., R. 20 E., hereinafter described.

39.45 The standard $\frac{1}{4}$ sec. cor. of sec. 34, monumented with a sandstone, 20x12x5 ins., set and mkd. as described in the official record. End triangulation.

At the cor. point

Set an ironpost, 30 ins. long, $2\frac{1}{2}$ ins. diam., 16 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T20S R20E

SC

$\frac{1}{4}$ S34

T21S

1964

Bury original stone cor. alongside iron post.

S. $89^{\circ} 54'$ W., beginning new measurement.

Desc. 65 ft. over SW. slope through dense timber.

Dependent Resurvey of a portion of the S. Bdy. (Fourth Standard Parallel South), T. 20 S., R. 20 E.

CHAINS

- 11.10 Trail road, bears irregularly NW. and SE.
- 17.80 Wash, 30 lks. wide, 10 ft. deep, in solid sandstone, drains NW.; asc. 20 ft. over NE. slope.
- 28.20 Point of spur, slopes NW.; desc. 10 ft. over rolling land.
- 34.11 The closing cor. of secs. 3 and 4, T. 21 S., R. 20 E., hereinafter described.
- 40.13 The standard cor. of secs. 33 and 34, monumented with a flintstone, 18x10x8 ins., set and mkd. as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., on solid rock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T20S R20E

SC

S33|S34

S4

T21S

1964

From which the original bearing trees

A cedar, 8 ins. diam. bears N. $37^{\circ}30'$ W., 54 lks. dist., mkd. T. 20 S., R. 20 E., S33 BT.

A cedar 18" diam. bears N. $44^{\circ}30'$ E., 144 lks. dist., mkd. T. 20 S., R. 20 E., S34 BT.

Bury original stone cor. in mound of stone alongside iron post.

Cor. of fence is 17 lks. N. and 3 lks. E. of cor., with fence bearing N. and E.

Land, mountainous and broken.

Soil, rocky.

Timber, dense juniper and pinon.

Undergrowth, scattered shadscale and grass.

N. $89^{\circ}56'$ W., along the S. bdy. of sec. 33.

Over mountainous and broken land through dense timber. By triangulation; desc. about 300 ft. over broken and ledgy SW. slope.

- 15.30 Improved gravel road to Thompson, bears about N. 20° W. and S. 20° E.
- 17.00 Thompson Canyon, drains S. 20° E.; asc. about 200 ft. over broken and ledgy NE. slope.

Dependent Resurvey of a Portion of the S. Bdy. (Fourth Standard Parallel South), T. 20 S., R. 20 E.

CHAINS

- 22.30 Rim of Thompson Canyon, bears about N. 15° W. and S. 15° E.; asc. about 80 ft. over rolling NE. slope.
- 34.13 Point for the N. ¼ sec. cor. of sec. 4, T. 21 S., R. 20 E., hereinafter described.
- 40.28 The standard ¼ sec. cor. of sec. 33, monumented with a sandstone, 18x12x3 ins., set and mkd. as described in the official record. End triangulation.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T20S R20E

SC

¼ S33

1964

From which the original bearing trees

A cedar, 10 ins. diam., bears S. 9° E., 28 lks. dist., mkd. SC¼S4BT.

A cedar 14 ins. diam., bears N. 25° E., 47 lks. dist., mkd. SC¼S33BT.

Bury original stone cor. alongside iron post, and raise a mound of stone, 3 ft. base, 1½ ft. high, N. of cor.

S. 89° 49' W., beginning new measurement.

By triangulation; asc. over gently rolling land.

- 9.50 Trail road, bears about N. 15° E. and S. 15° W.; asc. about 480 ft. over broken and ledgy E. slope.
- 33.40 End triangulation; ridge, bears N. and S.
- 34.00 The closing cor. of secs. 4 and 5, T. 21 S., R. 20 E., hereinafter described.
- Asc. 15 ft. over SE. slope.
- 39.30 Top of ascent, slopes S.; desc. 10 ft. over SW. slope.
- 40.05 The standard cor. of secs. 32 and 33, monumented with a sandstone, 28x12x4 ins., set and mkd. as described in the official record.
- At the cor. point
- Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T20S R20E

SC

S32|S33

S5

T21S

1964

Dependent Resurvey of a Portion of the S. Bdy. (Fourth Standard Parallel South), T. 20 S., R. 20 E.

CHAINS

Bury original stone cor. alongside iron post.

Land, mountainous and broken.

Soil, rocky.

Timber, medium dense juniper and pinon.

Undergrowth, shadscale and grass.

Dependent Resurvey of the S. Bdy., T. 21 S., R. 20 E.

Reestablishment of the Survey Executed by Lewis and Blossom in 1898

From the cor. of Tps. 21 and 22 S., R. 20 E., on the W. bdy. of T. 21 S., R. 21 E., monumented with an iron post, 2½ ins. diam., set, mkd. and witnessed as described in the official record, in T. 21 S., R. 21 E.

N. 89° 57' W., bet. secs. 1 and 36.

Over gently rolling desert land through shadscale undergrowth. Asc. 35 ft. over gentle NE. slope.

7.10 Spur, slopes SE.; desc. 25 ft. over gently rolling SW. slope.

24.35 Wash, drains SE.; asc. 10 ft. over NE. slope.

27.60 Top of low clay knoll; desc. 20 ft. over SW. slope.

28.95 Wash, 20 lks. wide, 6 ft. deep, drains SE.

35.75 Wash, 10 lks. wide, 10 ft. deep, drains S. 70° E.

40.32 Point for the ¼ sec. cor. of secs. 1 and 36 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

T21S R20E

¼ S36
S1

T22S

1964

Asc. 35 ft. over gently rolling desert land.

44.15 Wash, 20 lks. wide, 6 ft. deep, drains S. 65° E.

69.80 Wash, 5 lks. wide, 2 ft. deep, drains SE.

80.64 The cor. of secs. 1, 2, 35 and 36, monumented with a shale stone, 18x6x3 ins., set and mkd. as described in the official record.

Dependent Resurvey of the S. Bdy., T. 21 S., R. 20 E.

CHAINS

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with glass at base, and in a collar of stone, with brass cap mkd.

T21S R20E

S35	S36
S2	S1

T22S

1964

Bury original stone cor. alongside iron post.

Land, gently rolling desert.

Soil, clay.

No timber.

Undergrowth, shadscale.

N. $89^{\circ} 53'$ W., bet. secs. 2 and 35.

Over rolling desert land through shadscale undergrowth. Asc. 115 ft. over rolling NE. slope.

- 7.85 Wash, 5 lks. wide, 1 ft. deep, drains NE.; continue ascent.
- 26.70 Wash, 10 lks. wide, 4 ft. deep, drains SE.; asc. 15 ft. over E. slope.
- 31.70 Spur, slopes SE.; desc. 15 ft. over SW. slope.
- 39.69 The $\frac{1}{2}$ sec. cor. of secs. 2 and 35, monumented with a sandstone, 20x12x10 ins., set and mkd. as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with glass at base, and in a collar of stone, with brass cap mkd.

T21S R20E

$\frac{1}{2}$ S35
S2

T22S

1964

Bury original stone cor. alongside iron post.

N. $89^{\circ} 54'$ W., beginning new measurement.

Asc. 55 ft. over E. slope.

- 3.55 Spur, slopes S.; desc. 155 ft. over NW. slope.
- 24.80 Base of descent, bears NE. and SW.; thence over gently rolling land.

Dependent Resurvey of the S. Bdy., T. 21 S., R. 20 E.

CHAINS

- 24.80 Base of descent, bears NE. and SW.; thence over gently rolling land.
- 26.70 Wash, 5 lks. wide, 3 ft. deep, drains NW.
- 31.32 Trail road, bears N. 60° E. and S. 60° W.
- 37.87 Trail road, bears N. 10° E. and S. 10° W.
- 40.32 The cor. of secs. 2, 3, 34 and 35, monumented with a sandstone, 16x10x8 ins., set and mkd. as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with glass at base, and in a collar of stone, with brass cap mkd.

T21S R20E

S34 | S35
S3 | S2

T22S

1964

Bury original stone cor. alongside iron post.

Land, rolling desert.

Soil, clay.

No timber.

Undergrowth, shadscale.

N. 89° 57' W., bet. secs. 3 and 34.

Over gently rolling desert land through shadscale undergrowth. Desc. 65 ft. over gently rolling SW. slope.

- 5.10 Trail road, bears N. and S.
- 9.25 Wash, 10 lks. wide, 2 ft. deep, drains SW.
- 38.10 Wash, 5 lks. wide, 3 ft. deep, drains SW.
- 40.11 The ¼ sec. cor. of secs. 3 and 34, monumented with a sandstone, 8x6x4 ins., set and mkd. as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with glass at base, and in a collar of stone, with brass cap mkd.

T21S R20E

¼ S34
S3

T22S

1964

Bury original stone cor. alongside iron post.

Dependent Resurvey of the S. Bdy., T. 21 S., R. 20 E.

CHAINS

N. 89° 51' W., beginning new measurement.

Over nearly level desert land.

0.75 Trail road, bears N. 20° E. and S. 20° W.

7.50 Wash, 5 lks. wide, 2 ft. deep, drains S.

11.15 Wash, 10 lks. wide, 2 ft. deep, drains S.

17.35 Wash, 10 lks. wide, 3 ft. deep, drains S.

36.25 Wash, 5 lks. wide, 2 ft. deep, drains S.

40.13 The cor. of secs. 3, 4, 33 and 34, monumented with a cedar post, 4 ins. square, dimly mkd. 3 notches on E. edge.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with glass at base, and in a collar of stone, with brass cap mkd.

T21S R20E

S33	S34
S4	S3

T22S

1964

Bury original ~~cedar~~ cor. alongside iron post.

Land, gently rolling E. portion; nearly level W. portion.
Soil, clay.
No timber.
Undergrowth, shadscale.

West, bet. secs. 4 and 33.

Over nearly level desert land through shadscale undergrowth.

5.60 Wash, drains S.

18.55 Wash, drains S.

30.55 Wash, 60 lks. wide, 15 ft. deep, drains S.

40.07 The ½ sec. cor. of secs. 4 and 33, monumented with a flint stone, 16x6x4 ins., set and mkd. as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

T21S R20E

½	S33
S4	S3

T22S

1964

Bury original stone cor. alongside iron post.

Dependent Resurvey of the S. Bdy. T. 21 S. R. 20 E.

CHAINS

- N. 89° 50' W., beginning new measurement.
Over nearly level desert land.
- 21.65 Base of bench land, bears N. and S.; asc. 90 ft. over E. slope.
- 37.55 Rim of bench land bears N. and S., thence over nearly level bench land.
- 39.83 The cor. of secs. 4, 5, 32 and 33, monumented with a sandstone, 14x12x10 ins., set and mkd. as described in the official record.
- At the cor. point
Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.
- T21S R20E
S32|S33
S5|S4
T22S
1964
- Bury original stone cor. alongside iron post.
- Land, nearly level desert E. portion; nearly level bench land W. portion.
Soil, clay.
No timber.
Undergrowth, shadscale.
-
- S. 89° 59' W., bet. secs. 5 and 32.
Over nearly level bench land through shadscale and sagebrush undergrowth.
- 6.20 Gravel road to Thompson, bears N. and S.
- 20.35 Trail road, bears N. and S.
- 30.45 Trail road, bears N. 30° E. and S. 30° W.
- 33.20 Rim of bench, bears N. 20° E. and S. 20° W.; desc. 45 ft. over NW. slope.
- 40.13 The ¼ sec. cor. of secs. 5 and 32, monumented with a sandstone, 12x10x4 ins., set and mkd. as described in the official record.
- At the cor. point
Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground, and in a collar of stone to top, with brass cap mkd.
- T21S R20E
¼ S32
S5
T22S
1964
- Bury original stone cor. alongside iron post.
-
- N. 89° 51' W., beginning new measurement.
Asc. 25 ft. over SE. slope.

Dependent Resurvey of the S. Bdy., T. 21 S., R. 20 E.

CHAINS

- 0.60 Spur, slopes SW.; desc. 55 ft. over NW. slope.
 - 11.75 Wash, 40 lks. wide, 5 ft. deep, drains SW.
 - 15.70 Wash, 30 lks. wide, 5 ft. deep, drains SW.; asc. 25 ft. over SE. slope.
 - 26.90 Spur, slopes S.; desc. 35 ft. over W. slope.
 - 40.31 The cor. of secs. 5, 6, 31 and 32, monumented with a flint stone 18x8x3 ins., set and mkd. as described in the official record.
- At the cor. point
- Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, with brass cap mkd.

T21S. R20E

S31	S32
S6	S5

T22S

1964

Bury original stone cor. alongside iron post.

Land, rolling desert.

Soil, clay.

No timber.

Undergrowth, shadscale and sagebrush.

N. 89° 57' W., bet. secs. 6 and 31.

Over rolling desert land through shadscale and sagebrush undergrowth. Asc. 30 ft. over gentle SE. slope.

- 29.50 Spur, slopes SW.; desc. 35 ft. over NW, slope.

- 40.13 The ½ sec. cor. of secs. 6 and 31, monumented with a flint stone, 15x10x2 ins., set and mkd. as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd,

T21S R20E

½ S31	S6
-------	----

T22S

1964

Bury original stone cor. alongside iron post.

N. 89° 57' W., beginning new measurement.

Desc. 50 ft. over gently rolling SW. slope.

- 26.00 Wash, 15 lks. wide, 5 ft. deep, drains SW.

- 36.20 Wash, 20 lks. wide, 5 ft. deep, drains SW.

- 40.03 The cor. of Tps. 21 and 22 S., R. 20 E., on the E. bdy. of T. 22 S., R. 19 E., monumented with a sandstone, 16x12x12 ins., set and mkd. as described in the official record.

At the cor. point

Dependent Resurvey of the S. Bdy., T. 21 S., R. 20 E.

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with glass at base, and in a collar of stone, with brass cap mkd.

T21S
R20E

T22S		S31
R19E		S6

S1 | S6
T22S

1964

Bury original stone cor. alongside iron post.

From this cor., the cor. of Tps. 21 and 22 S., R. 19 E., bears N. $0^{\circ} 15'$ E., 5.65 chs. dist., monumented with an iron post, 3 ins. diam., set, mkd. and witnessed as described in the official record, in T. 21 S., R. 19 E.

Land, gently rolling desert.

Soil, clay.

No timber.

Undergrowth, shadscale and sagebrush.

Dependent Resurvey of the Subdivision, T. 21 S.,
R. 20 E.

Reestablishment of the Survey Executed by
Lewis and Blossom in 1898

From the cor. of secs. 1, 2, 35 and 36, on the S. bdy. of the Tp.

N. $0^{\circ} 09'$ E., bet. secs. 35 and 36.

Over rolling desert land through shadscale undergrowth.

6.05 Wash, 5 lks. wide, 3 ft. deep, drains E.

30.10 Wash, 5 lks. wide, 2 ft. deep, drains SE.

34.65 Wash, 5 lks. wide, 2 ft. deep, drains SE.

39.50 Wash, 25 lks. wide, 10 ft. deep, drains SE.

40.15 Point for the $\frac{1}{2}$ sec. cor. of secs. 35 and 36 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

T21S R20E

$\frac{1}{2}$		S36
S35		S36

1964

Asc. 85 ft. over SW. slope.

49.20 Spur, slopes S. 65° E.; desc. 50 ft. over NE. slope.

58.80 Wash, 10 lks. wide, 3 ft. deep, drains S, 65° E.; asc. 30 ft. over S. slope.

61.60 Spur, slopes E.; desc. 70 ft. over NE. slope.

65.30 Wash, 5 lks. wide, 2 ft. deep, drains E.

Dependent Resurvey of the Subdivision, T. 21 S., R. 20 E.

CHAIN

- 69.40 Trail road, bears N. 80° W. and S. 80° E.
- 76.90 Trail road, bears irregularly E. and W.
- 80.30 Point for the cor. of secs. 25, 26, 35 and 36, at proportionate dist., falls in deep wash, drains irregularly E., and deemed unsafe to perpetuate; there is no remaining evidence of the original cor.
- Point selected for the witness cor. of secs. 25, 26, 35 and 36, bears N. 89° 50' W., 1.92 chs. dist.
- Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T21S R20E
W C
S26 | S25
S35 | S36

1964

No accessories available.

Land, gently rolling desert S. portion; rolling N. portion.
Soil, clay.
No timber.
Undergrowth, shadscale.

From the cor. of secs. 25 and 36, on the E. bdy. of the Tp., monumented with an iron post, 2½ ins. diam., set, mkd. and witnessed as described in the official record, in T. 21 S., R. 21 E.

S. 89° 54' W., bet. secs. 25 and 36.

Over gently rolling desert land through shadscale and scattered sagebrush undergrowth.

- 18.50 Wash, 50 lks. wide, 6 ft. deep, drains SW.
- 25.30 Wash, 1.50 chs. wide, 12 ft. deep, drains SE.
- 31.50 Wash, 50 lks. wide, 5 ft. deep, drains SE.
- 40.04 Point for the ¼ sec. cor. of secs. 25 and 36, at proportionate dist.; there is no remaining evidence of the original cor.
- Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

T21S R20E

¼ S25
S36

1964

- 43.70 Wash, 40 lks. wide, 10 ft. deep, drains SE.
- 56.90 Wash, 1.00 ch. wide, 20 ft. deep, drains S. 60° E.
- 61.50 Same wash, drains N. 80° E., from W., thence along wash.
- 80.08 True point for the cor. of secs. 25, 26, 35 and 36.
- Land, gently rolling desert.
Soil, clay.
No timber.
Undergrowth, shadscale and scattered sagebrush.

Dependent Resurvey of the Subdivision, T. 21 S., R. 20 E.

CHAINS

- N. 0° 13' E., bet. secs. 25 and 26.
Over gently rolling desert land through shadscale undergrowth.
- 4.80 Wash, 90 lks. wide, 8 ft. deep, drains irregularly E.
- 19.10 Wash, drains irregularly E.
- 21.78 Telephone line, bears N. 83° W. and S. 83° E.
- 23.15 Center of U. S. Highway 50 and 6, bears N. 83° W. and S. 83° E.
- 34.50 Wash, 20 lks. wide, 7 ft. deep, drains SE.
- 38.30 Wash, 10 lks. wide, 8 ft. deep, drains SE.
- 40.15 The $\frac{1}{4}$ sec. cor. of secs. 25 and 26, monumented with a sandstone, 8x8x4 ins., set and mkd. as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with glass at base, and in a collar of stone, with brass cap mkd.

T21S R20E

$\frac{1}{4}$
S26 | S25

1964

Bury original stone cor. alongside iron post.

- N. 0° 03' E., beginning new measurement.
Continue over gently rolling desert land.
- 5.35 Trail road, bears NW. and SE.
- 10.50 Wash, 60 lks. wide, 12 ft. deep, drains SE.
- 13.30 Wash, 1.50 chs. wide, 12 ft. deep, drains SE.
- 19.30 Wash, 70 lks. wide, 15 ft. deep, drains S. 25° E.; asc. 20 ft. over gentle SW. slope.
- 40.13 The cor. of secs. 23, 24, 25 and 26, monumented with a sandstone, 16x8x6 ins., set and mkd. as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T21S R20E

S23 | S24
S26 | S25

1964

Bury original stone cor. alongside iron post, and raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

Dependent Resurvey of the Subdivision, T. 21 S., R. 20 E.

CHAINS

Land, gently rolling desert.
Soil, clay.
No timber.
Undergrowth, shadscale.

From the cor. of secs. 24 and 25, on the E. bdy. of the Tp., monumented with an iron post, $2\frac{1}{2}$ ins. diam., set, mkd. and witnessed as described in the official record in T. 21 S., R. 21 E.

S. $89^{\circ} 56'$ W., bet. secs. 24 and 25.

Over rolling desert land through shadscale undergrowth.
Asc. 55 ft. over E. slope.

- 7.45 Wash, 10 lks. wide, 4 ft. deep, drains SE. from W., thence along wash.
- 11.45 Leave wash from NW.
- 23.75 Spur, slopes SE.; desc. 40 ft. over SW. slope.
- 30.15 Wash, 5 lks. wide, 3 ft. deep, drains S.; asc. 10 ft. over SE. slope.
- 36.45 Wash, 10 lks. wide, 4 ft. deep, drains SE.
- 40.24 The $\frac{1}{2}$ sec. cor. of secs. 24 and 25, monumented with a flint stone, 20x12x4 ins., set and mkd. as described in the official record.
- At the cor. point
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with glass at base, and brass cap mkd.
- T21S R20E
 $\frac{1}{2} \frac{S24}{S25}$
1964
- Bury original stone cor. alongside iron post.
-
- N. $89^{\circ} 57'$ W., beginning new measurement.
- Asc. 55 ft. over SE. slope.
- 12.45 Spur, slopes S.; desc. 70 ft. over SW. slope.
- 27.08 Transmission line, bears S. $62^{\circ} 30'$ E. and N. $62^{\circ} 30'$ W.
- 28.68 Denver and Rio Grande Western Railroad, bears S. $62^{\circ} 30'$ E. and N. $62^{\circ} 30'$ W.
- 40.08 The cor. of secs. 23, 24, 25 and 26.

Land, rolling desert.
Soil, clay.
No timber.
Undergrowth, shadscale.

Dependent Resurvey of the Subdivision, T. 21 S., R. 20 E.

CHAINS

North, bet. secs. 23 and 24.

Over rolling desert land through shadscale undergrowth.
Asc. 150 ft. over SW. slope.

- 3.36 Denver and Rio Grande Western Railroad, bears E. and W.
- 4.05 Transmission line, bears E. and W.
- 31.00 Spur, slopes SE.; desc. 15 ft. over NE. slope.
- 38.65 Wash, drains SE.; asc. 10 ft. over SW. slope.
- 40.07 The $\frac{1}{2}$ sec. cor. of secs. 23 and 24, monumented with a flint stone, 12x12x4 ins., set and mkd. as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

T21S R20E

$\frac{1}{2}$
S23 S24

1964

Bury original stone cor. alongside iron post.

N. $0^{\circ} 03'$ W., beginning new measurement.

Asc. 40 ft. over S. slope.

- 5.25 Spur, slopes SE.; desc. 20 ft. over NE. slope.
- 9.50 Wash, 15 lks. wide, 5 ft. deep, drains SE.; asc. 120 ft. over SW. slope.
- 19.00 Spur, slopes SE.; desc. 130 ft. over NE. slope.
- 26.60 Wash, 20 lks. wide, 8 ft. deep, drains SE.; asc. 150 ft. over SE. slope.
- 36.60 Spur, slopes SE.; desc. 50 ft. over NE. slope.
- 39.99 The cor. of secs. 13, 14, 23 and 24, monumented with a flint stone, 16x5x3 ins., set and mkd. as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T21S R20E

S14 S13
S23 S24

1964

Bury original stone cor. alongside iron post.

Dependent Resurvey of the Subdivision, T. 21 S., R. 20 E.

CHAINS

No accessories available.

Land, rolling and eroded clay hills:

Soil, clay.

No timber.

Undergrowth, shadscale.

From the cor. of secs. 13 and 24, on the E. bdy. of the Tp., monumented with an iron post, $2\frac{1}{2}$ ins. diam., set, mkd. and witnessed as described in the official record, in T. 21 S., R. 21 E.

S. $89^{\circ} 13'$ W., bet. secs. 13 and 24.

Over rolling clay hills through shadscale undergrowth.
Asc. 55 ft. over SE. slope.

3.35 Spur, slopes SW.; desc. 60 ft. over W. slope.

10.45 Wash, 1.00 ch. wide, 6 ft. deep, drains S. 30° E.; asc. 125 ft. over NE. slope.

16.40 Spur, slopes SE.; desc. 30 ft. over SW. slope.

28.25 Wash, 1.00 wide, 15 ft. deep, drains SE.; asc. 40 ft. over E. slope.

39.94 The $\frac{1}{4}$ sec. cor. of secs. 13 and 24, monumented with a flint stone, 20x17x3 ins., set and mkd. as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with glass at base, and brass cap mkd.

T21S R20E

$\frac{1}{4}$ $\frac{S13}{S24}$

1964

Bury original stone cor. alongside iron post, and raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

N. $89^{\circ} 56'$ W., beginning new measurement.

Asc. 30 ft. over SE. slope.

18.55 Wash, 25 lks. wide, 4 ft. deep, drains SE.; asc. 40 ft. over SE. slope.

24.40 Spur, slopes SE.; desc. 40 ft. over SW. slope.

24.65 Fence, bears S. and N. 1.50 chs. to end.

30.85 Wash, 1.50 chs. wide, 3 ft. deep, drains SE.; asc. 40 ft. over NE. slope.

40.14 The cor. of secs. 13, 14, 23 and 24.

Dependent Resurvey of the Subdivision, T. 21 S. R. 20 E.

CHAINS

Land, rolling clay hills.
Soil, clay.
No timber.
Undergrowth, shadscale.

N. 0° 02' W., bet. secs. 13 and 14.

Over rolling clay hills through shadscale undergrowth.
Asc. 80 ft. over SE. slope.

- 6.70 Spur, slopes NE.; desc. 35 ft. over NE. slope.
- 11.90 Wash, 20 lks. wide, 6 ft. deep, drains E.
- 18.00 Wash, 20 lks. wide, 6 ft. deep, drains SE.; asc. 55 ft. over SW. slope.
- 23.00 S. edge of flat spur, slopes SE., thence over nearly level land.
- 29.20 N. edge of spur; desc. 55 ft. over NE. slope.
- 40.05 The 1/2 sec. cor. of secs. 13 and 14, monumented with a flint stone, 18x12x3 ins., set and mkd. as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.

T21S R20E

1/2
S14 | S13

1964

Bury original stone cor. alongside iron post, and raise a mound of stone, 3 ft. base, 1 1/2 ft. high, W. of cor.

N. 0° 01' W., beginning new measurement.

By triangulation, desc. about 80 ft. over NE. slope.

- 15.00 Wash, drains E.; asc. about 400 ft. over steep and broken SE. slope.

40.01 End triangulation.

- 40.22 The cor. of secs. 11, 12, 13 and 14, monumented with a sandstone, 12x10x6 ins., set and mkd. as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 10 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T21S R20E

S11 | S12
S14 | S13

1964

Dependent Resurvey of the Subdivision, T. 21 S., R. 20 E.

CHAINS

Bury original stone cor. alongside iron post.

Land, rolling clay hills S. portion; broken N. portion.
Soil, clay.
No timber.
Undergrowth, shadscale.

From the cor. of secs. 12 and 13, on the E. bdy. of the
Tp., monumented with an iron post, 2½ ins. diam., set, mkd.
and witnessed as described in the official record in
T. 21 S., R. 21 E.

S. 89° 56' W., bet. secs. 12 and 13.

Over rolling clay hills through shadscale undergrowth.
Asc. 60 ft. over E. slope.

13.90 Spur, slopes S.; desc. 20 ft. over SW. slope.

21.05 Wash, drains S.; asc. 70 ft. over SE. slope.

22.25 Wash, 30 lks. wide, 1 ft. deep, drains SE.; asc. 15 ft.
over E. slope.

32.40 Spur, slopes S. 20° E.; desc. 55 ft. over SW. slope.

40.07 The ¼ sec. cor. of secs. 12 and 13, monumented with a
sandstone, 14x12x3 ins., set and mkd. as described in the
official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 16 ins.
in the ground to bedrock, and in a mound of stone, 3 ft.
base to top, with brass cap mkd.

T21S R20E

¼ $\frac{S12}{S13}$

1964

Bury original stone cor. alongside iron post.

S. 89° 57' W., beginning new measurement.

Desc. 5 ft. over SW. slope.

2.30 Wash, drains S.; asc. 40 ft. over E. slope.

10.20 Spur, slopes SE.; thence by triangulation; asc. about
340 ft. over steep and broken SE. slope.

40.12 The cor. of secs. 11, 12, 13 and 14. End triangulation.

Land, rolling clay hills E. portion; broken W. portion.
Soil, clay.
No timber.
Undergrowth, shadscale.

Dependent Resurvey of the Subdivision, T. 21 S., R. 20 E.

CHAINS	
	N. 0° 01' E., bet. secs. 11 and 12. Over broken land through shadscale undergrowth. By triangulation; asc. about 400 ft. over broken and ledgy SE. slope.
10.80	Top of sandstone ledge, rim of Book Cliffs, bears NE. and SW. End triangulation. Desc. 60 ft. over rocky NW. slope of mesa. Enter dense juniper and pinon timber.
33.25	Rocky wash, drains NW.
39.86	The $\frac{1}{2}$ sec. cor. of secs. 11 and 12, monumented with a sandstone, 18x12x4 ins., set and mkd. as described in the official record. from which the original bearing tree A juniper, 12 ins. diam., bears S. 60° 15' E., 40 lks. dist., mkd. $\frac{1}{2}$ S 12 BT. No trace of the other original bearing tree. At the cor. point Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd. T21S R20E $\frac{1}{2}$ S11 S12 1964 from which A juniper, 10 ins. diam., bears S. 85° W., 16 lks. dist., mkd. $\frac{1}{2}$ S11 BT. Bury original stone cor. alongside iron post, and raise a mound of stone, 2 ft. base, 2 ft. high, W. of cor.
	N. 0° 03' W., beginning new measurement. By triangulation, desc. about 360 ft. over broken NW. slope.
22.00	Rocky draw, drains W.; asc. about 200 ft. over ledgy SW. slope.
27.00	Spur, slopes NW.; desc. about 200 ft. over broken NE. slope.
40.09	The cor. of secs. 1, 2, 11 and 12, monumented with a sand stone, 16x10x7 ins., set and mkd. as described in the official record. End triangulation. from which the original bearing trees A pinon, 12 ins. diam., bears S. 40° 30' E., 25 lks. dist., mkd. T21S R20E S12 BT. A pinon, 14 ins. diam., bears N. 51° 30' W., 54 lks. dist., mkd. T21S R20E S2 BT.

Dependent Resurvey of the Subdivision, T. 21 S., R. 20 E.

CHAINS

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., on solid rock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T21S R20E

$\frac{S2|S1}{S11|S12}$

1964

Bury original stone cor. in mound of stone alongside iron post.

Land, broken.

Soil, rocky clay.

Timber, dense pinon and juniper N. portion; no timber S. portion.

Undergrowth, scattered shadscale and grass.

From the cor. of secs. 1 and 12, on the E. bdy. of the Tp., monumented with an iron post, $2\frac{1}{2}$ ins. diam., set, mkd. and witnessed as described in the official record in T. 21 S., R. 21 E.

S. $89^{\circ} 50'$ W., bet. secs. 1 and 12.

Over broken land along edge of Book Cliffs through scattered timber. By triangulation; desc. about 250 ft. over broken SW. slope.

11.15 Bottom of canyon, drains S.; asc. about 360 ft. over broken NE. slope.

25.15 Rim of canyon, bears NW. and SE.; asc. over gently rolling NE. slope.

30.15 Trail road, bears N. and S.

35.00 Point selected for the witness $\frac{1}{4}$ sec. cor. of secs. 1 and 12. End triangulation.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 16 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T21S R20E

W $\frac{1}{4}$ ← $\frac{S1}{S12}$

1964

Thence by triangulation; asc. about 280 ft. over broken E. slope.

35.05 Point for the witness $\frac{1}{4}$ sec. cor. of secs. 1 and 12 at proportionate dist.; there is no remaining evidence of the original witness cor.

39.10 End triangulation, on narrow ledgy ridge, bears N. and S., thence by triangulation; desc. about 250 ft. over broken NW. slope.

Dependent Resurvey of the Subdivision, T. 21 S., R. 20 E.

CHAINS	
40.07	Point for the $\frac{1}{4}$ sec. cor. of secs. 1 and 12 at proportionate dist., falls on slide rock and cannot be perpetuated.
56.15	Trail road, bears S. and N. about 10.00 chs., thence W.; desc. about 100 ft. over broken NW. slope. Enter dense timber.
77.15	Rocky draw, drains NW. curving SW.
80.14	The cor. of secs. 1, 2, 11 and 12. End triangulation. Land, broken. Soil, rocky clay. Timber, scattered pinon and juniper E. portion; dense pinon and juniper W. portion. Undergrowth, shadscale and grass.
	N. $0^{\circ} 02'$ W., bet. secs. 1 and 2.
	Over broken land of Book Cliffs through dense timber.
0.30	Draw, drains SW.; asc. 70 ft. over S. slope.
3.40	Spur, slopes W., thence by triangulation; desc. about 80 ft. over NW. slope.
17.00	Draw, drains SW.; asc. 80 ft. over SE. slope.
24.50	Trail road, bears irregularly E. and W.; asc. about 200 ft. over steep S. slope.
40.10	The $\frac{1}{4}$ sec. cor. of secs. 1 and 2, monumented with a sandstone, 14x10x2 ins., set and mkd. as described in the official record. End triangulation.
	At the cor. point
	Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.
	T21S R20E
	$\frac{1}{4}$
	S2 S1
	1964
	Bury original stone cor. alongside iron post.
	N. $0^{\circ} 53'$ W., beginning new measurement.
	Asc. 105 ft. over SE. slope.
9.03	The closing cor. of secs. 1 and 2, on the N. bdy. of the Tp. (Fourth Standard Parallel South), monumented with a sandstone, 18x12x3 ins., set and mkd. as described in the official record.
	At the cor. point

Dependent Resurvey of the Subdivision, T. 21 S., R. 20 E.

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground, and in a collar of stone, with brass cap mkd.

T20S
 S36
 ———
 S2 | S1
 C C
 T21S R20E
 1964

Bury original stone cor. alongside iron post.

From this cor., the standard cor. of secs. 35 and 36, T. 20 S., R. 20 E., bears West 6.10 chs. dist., monumented with an iron post, 2 ins. diam., set, mkd. and witnessed as described in the official record, in T. 20 S., R. 20 E.

Land, broken.
 Soil, rocky.
 Timber, medium dense pinon and juniper.
 Undergrowth, shadscale.

Point for the N. ¼ sec. cor. of sec. 1, on the N. bdy. of the Tp., and midpoint bet. the closing cor. of secs. 1 and 2, and the closing cor. of T. 21 S., Rs. 20 and 21 E.

Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T20S
 ———
 ¼ S1
 T21S R20E
 1964

From this cor., the standard ¼ sec. cor. of sec. 36, T. 20 S., R. 20 E., bears West, 6.25 chs. dist., monumented with an iron post, 1 in. diam., set, mkd. and witnessed as described in the official record, in T. 20 S., R. 20 E.

From the cor. of secs. 2, 3, 34 and 35, on the S. bdy. of the Tp.

North, bet. secs. 34 and 35.

Over gently rolling desert land through shadscale undergrowth. Asc. 65 ft. over gently rolling SW. slope.

16.85 Wash, 10 lks. wide, 1 ft. deep, drains W.

40.14 The ¼ sec. cor. of secs. 34 and 35, monumented with a sandstone, 18x12x3 ins., set and mkd. as described in the official record.

At the cor. point

Dependent Resurvey of the Subdivision T. 21 S. R. 20 E.

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with glass at base, and brass cap mkd.

T21S R20E

$$\frac{1}{2}$$
 S34|S35

1964

Bury original stone cor. alongside iron post, and raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

North, beginning new measurement.

Asc. 25 ft. over SW. slope.

- 8.00 Wash, 20 lks. wide, 2 ft. deep, drains SW.; asc. 55 ft. over SW. slope.
- 11.80 Spur, slopes SW.; asc. 75 ft. over SW. slope.
- 11.90 Trail road, bears NE. and SW.
- 24.90 Ridge, bears NW. and SE.; gravel pits on line; desc. 100 ft. over NE. slope.
- 36.95 Wash, 15 lks. wide, 5 ft. deep, drains NE.; asc. 10 ft. over S. slope.
- 38.75 Small spur, slopes NE.; desc. 15 ft. over NE. slope.
- 40.21 The cor. of secs. 26, 27, 34 and 35, monumented with a flint stone, 16x10x4 ins., set and mkd. as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 22 ins. in the ground, with brass cap mkd.

T21S R20E

$$\frac{S27|S26}{S34|S35}$$

1964

Bury original stone cor. alongside iron post, and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

Land, gently to rolling desert.

Soil, clay.

No timber.

Undergrowth, shadscale.

From the true point for cor. of secs. 25, 26, 35 and 36.

N. $89^{\circ} 50'$ W., bet. secs. 26 and 35.

Over rolling desert land through shadscale and sagebrush undergrowth. Asc. 45 ft. over NE. slope.

- 1.92 The witness cor. of secs. 25, 26, 35 and 36, hereinbefore described.

Dependent Resurvey of the Subdivision, T. 21 S., R. 20 E.

CHAINS	
25.95	Trail road, bears N. 60° W. and S. 60° E.; asc. 60 ft. over broken E. slope.
36.10	Spur, slopes N.; desc. 35 ft. over W. slope.
40:07	The ½ sec. cor. of secs. 26 and 35, monumented with a flint stone, 16x8x6 ins., set and mkd. as described in the official record.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T21S R20E
	½ $\frac{S26}{S35}$
	1964
	Bury original stone cor. alongside iron post, and raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.
	N. 89° 58' W., beginning new measurement.
	Desc. 20 ft. over gentle W. slope.
13.30	Wash, 10 lks. wide, 6 ft. deep, drains N.; asc. 45 ft. over gentle NE. slope.
21.30	Trail road, bears NE. and SW.
40.13	The cor. of secs. 26, 27, 34 and 35.
	Land, rolling desert. Soil, clay. No timber. Undergrowth, shadscale and sagebrush.
	N. 0° 01' W., bet. secs. 26 and 27.
	Over rolling desert land through shadscale undergrowth. Desc. 20 ft. over NE. slope.
6.50	Wash, 10 lks. wide, 3 ft. deep, drains NE.
12.15	Wash, 10 lks. wide, 3 ft. deep, drains NE.; asc. 35 ft. over SW. slope.
25.80	Spur, slopes E.; desc. 40 ft. over N. slope.
32.09	Telephone line, bears N. 83° W. and S. 83° E.
33.42	Center of U. S. Highway 50 and 6, bears S. 83° E. and N. 83° W., curving NW.
35.00	Wash, drains E.; asc. 35 ft. over S. slope.
40.16	The ½ sec. cor. of secs. 26 and 27, monumented with a sandstone, 16x12x2 ins., set and mkd. as described in the official record.

Dependent Resurvey of the Subdivision, T. 21 S., R. 20 E.

CHAINS

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with glass at base, and brass cap mkd,

T21S R20E

 $\frac{1}{2}$
S27|S26

1964

Bury original stone cor. alongside iron post, and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

North, beginning new measurement.

Asc. 20 ft. over S. slope.

- 2.69 Denver and Rio Grande Western Railroad, bears about N. 60° E. and S. 75° W., on curve; asc. 60 ft. over S. slope.
- 4.01 Telephone line, parallel to railroad.
- 8.70 Spur, slopes SE.; desc. 35 ft. along E. slope.
- 22.45 Wash, 10 lks. wide, 3 ft. deep, drains SE.; asc. 45 ft. over SW. slope.
- 28.85 Spur, slopes SE.; desc. 75 ft. over NE. slope.
- 40.03 The cor. of secs. 22, 23, 26 and 27, monumented with a flint stone, 16x6x4 ins., set and mkd. as described in the official reocrd.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with glass at base, and brass cap mkd.

T21S R20E

S22|S23
S27|S26

1964

Bury original stone cor. alongside iron post.

Land, rolling desert.

Soil, clay.

No timber.

Undergrowth, shadscale.

From the cor. of secs. 23, 24, 25 and 26.

S. $89^\circ 56'$ W., bet. secs. 23 and 26.

Over gently rolling desert land through shadscale undergrowth.

- 12.00 Wash, 1.50 chs. wide, 12 ft. deep, drains SE.
- 23.00 Trail road, bears S., and N. about 2.00 chs., thence W.

Dependent Resurvey of the Subdivision, T. 21 S., R. 20 E.

CHAINS

- 40.12 The $\frac{1}{2}$ sec. cor. of secs. 23 and 26, monumented with a flint stone, 16x8x4 ins., set and mkd. as described in the official record.
- At the cor. point
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.
- T21S R20E
 $\frac{1}{2}$ $\frac{S23}{S26}$
1964
- Bury original stone cor. alongside iron post, and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.
-
- S. $89^{\circ} 57'$ W., beginning new measurement.
- Continue over gently rolling desert land.
- 12.18 Bench mark, on line, with brass tablet mkd.
- ELEV 5055.010 FT
R15
1927
- 14.39 Denver and Rio Grande Western Railroad, on curve, bears NE. and SW. Power line parallels railroad.
- 22.64 Old railroad grade, bears irregularly E. and W.
- 24.15 Wash, 20 lks. wide, 6 ft. deep, drains SW.
- 29.05 Wash, 30 lks. wide, 15 ft. deep, drains SW.
- 30.35 Center of several washes, all about 50 lks. wide, 15 ft. deep, drains generally S.
- 40.15 The cor. of secs. 22, 23, 26 and 27.
- Land, gently rolling desert.
Soil, clay.
No timber.
Undergrowth, shadscale.
-
- North, bet. secs. 22 and 23.
- Over gently rolling desert land through shadscale undergrowth. Desc. 20 ft. over gentle NE. slope.
- 20.50 Road, dirt unimproved, bears NW. and SE.
- 28.50 Trail road, bears NE. and SW.
- 32.00 Wash, drains SE.; asc. 25 ft. over gentle SW. slope.
- 40.29 The $\frac{1}{2}$ sec. cor. of secs. 22 and 23, monumented with a sandstone, 20x8x6 ins., set and mkd. as described in the official record.

Dependent Resurvey of the Subdivision, T. 21 S., R. 20 E.

CHAINS

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with glass at base, and brass cap mkd.

T21S R20E

	½	
S22		S23

1964

Bury original stone cor. alongside iron post.

N: 0° 02' W., beginning new measurement.

Asc. 65 ft. over SW. slope.

4.20 Trail road, bears NW. and S. irregularly.

40.02 The cor. of secs. 14, 15, 22 and 23, monumented with a sandstone, 14x10x8 ins., set and mkd. as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with glass at base, and brass cap mkd.

T21S R20E

S15		S14
S22		S23

1964

Bury original stone cor. alongside iron post.

Land, gently rolling desert.

Soil, rocky clay.

No timber.

Undergrowth, shadscale.

From the cor. of secs. 13, 14, 23 and 24.

West, bet. secs. 14 and 23.

Over rolling desert land, through shadscale undergrowth. Asc. 125 ft. over NE. slope.

8.35 Spur, slopes S., thence by triangulation, desc. about 80 ft. over W. slope.

11.10 Wash, 3.00 chs. wide, 20 ft. deep, drains SE.; asc. about 120 ft. over NE. slope.

30.00 Spur, slopes SE.; desc. about 120 ft. over SW. slope.

40.02 The ½ sec. cor. of secs. 14 and 23, monumented with a sandstone, 12x8x4 ins., set and mkd. as described in the official record. End triangulation.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

Dependent Resurvey of the Subdivision, T. 21 S., R. 20 E.

CHAINS

T21S R20E

$$\frac{1}{4} \frac{S14}{S23}$$

1964

Bury original stone cor. alongside iron post.

N. 89° 42' W., beginning new measurement.

By triangulation, desc. 80 ft. over SW. slope.

13.35 Wash, drains SW.

28.35 Wash, drains S.; asc. about 30 ft. over SE. slope.

40.36 The cor. of secs. 14, 15, 22 and 23. End triangulation.

Land, rolling desert.
Soil, rocky clay.
No timber.
Undergrowth, shadscale.

North, bet. secs. 14 and 15.

Over rolling desert land through shadscale undergrowth.
Asc. 15 ft. over SW. slope.

10.00 Spur, slopes SE.; asc. 35 ft. over gentle SE. slope.

40.05 The $\frac{1}{4}$ sec. cor. of secs. 14 and 15, monumented with a flint stone, 12x12x6 ins., set and mkd. as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T21S R20E

$$\frac{1}{4} \frac{S15}{S14}$$

1964

Bury original stone cor. alongside iron post, and raise a mound of stone, 2 $\frac{1}{2}$ ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.

N. 0° 01' W., beginning new measurement.

By triangulation, asc. about 740 ft. over steep and broken face of Book Cliffs, facing SE.

40.08 True point for the cor. of secs. 10, 11, 14 and 15 falls on face of ledge where cor. cannot be perpetuated.

From this point, the original witness cor. of secs. 10, 11, 14 and 15, bears N. 0° 01' W., 1.25 chs. dist., monumented with a sandstone, 16x15x4 ins., set and mkd. as described in the official record.

Dependent Resurvey of the Subdivision, T. 21 S., R. 20 E.

CHAINS

At the witness cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., on solid stone, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T21S R20E
 W C
 $\frac{S10}{S15} | \frac{S11}{S14}$
 ↓
 1964

Bury original stone cor. in mound of stone, alongside iron post.

Land, rolling desert S. portion; broken face of Book Cliffs N. portion.
 Soil, rocky clay.
 No timber.
 Undergrowth, shadscale.

From the cor. of secs. 11, 12, 13 and 14.

S. $89^{\circ} 39'$ W., bet. secs. 11 and 14.

Over broken land through scattered shadscale undergrowth. By triangulation, asc. about 200 ft. over steep SE. slope.

8.00 Top of ascent, slopes sharply S.; desc. about 400 ft. over steep SW. slope.

32.00 Small draw, drains S.

35.00 Spur, slopes S. End triangulation; desc. 45 ft. over W. slope.

40.17 The $\frac{1}{4}$ sec. cor. of secs. 11 and 14, monumented with a sandstone, 20x12x8 ins., set and mkd. as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 14 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T21S R20E
 $\frac{1}{4} \frac{S11}{S14}$
 1964

Bury original stone cor. alongside iron post.

N. $89^{\circ} 44'$ W., beginning new measurement.

By triangulation, desc. about 80 ft. over W. slope.

12.00 Draw, drains SW.; asc. about 720 ft. over steep and broken SE. face of Book Cliffs.

Dependent Resurvey of the Subdivision, T. 21 S., R. 20 E.

CHAINS
40.21

True point for the cor. of secs. 10, 11, 14 and 15.

Land, broken.
Soil, rocky clay.
No timber.
Undergrowth, scattered shadscale.

N. 0° 01' E., bet. secs. 10 and 11.

Over broken land. By triangulation, asc. about 80 ft. over sheer sandstone ledges.

1.25

The witness cor. of secs. 10, 11, 14 and 15, hereinbefore described. End triangulation. Top of ledge, bears N. 35° E. and S. 35° W. Desc. 90 ft. over mesa through dense pinon and juniper timber.

4.70

Trail road, bears irregularly N. and SW.

40.27

The $\frac{1}{2}$ sec. cor. of secs. 10 and 11, monumented with a sandstone, 24x14x5 ins., set and mkd. as described in the official record.

from which

A pine, 8 ins. diam., bears S. 82° W., 53 lks. dist. mkd. $\frac{1}{2}$ S10 BT.

Bearing tree for sec. 11 was not found.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 20 ins. in the ground, with brass cap mkd.

T21S R20E

$\frac{1}{2}$
S10 | S11

1964

Bury original stone cor. alongside iron post, and raise a mound of stone, 3 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.

North, beginning new measurement.

Continue over gently rolling mesa through dense timber.

2.10

Trail road, bears E. and W.

Thence, by triangulation, desc. about 120 ft. over rolling N. slope.

18.15

Trail road, bears NW. and SE.

40.28

The cor. of secs. 2, 3, 10 and 11, monumented with a sandstone, 16x10x6 ins., set and mkd. as described in the official record.

from which the original bearing trees

A juniper, 18 ins. diam., bears N. 54° E., 35 lks. dist., mkd. T21S R20E S2 BT.

A pinon, 24 ins. diam., bears S. 60° E., 102 lks. dist., mkd. T21S R20E S11 BT.

A juniper, 12 ins. diam., bears S. 46° 30' W., 15 lks. dist., mkd. T21S R20E S10 BT.

At the corner point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

Dependent Resurvey of the Subdivision, T. 21 S., R. 20 E.

CHAINS

T21S R20E

S3	S2
S10	S11

1964

Bury original stone cor. alongside iron post, and raise a mound of stone, $2\frac{1}{2}$ ft. base, 2 ft. high, W. of cor.

Land, rolling mesa.
Soil, rocky.
Timber, dense juniper and pinon.
Undergrowth, scattered shadscale.

From the cor. of secs. 1, 2, 11 and 12.

N. $89^{\circ} 14'$ W., bet. secs. 2 and 11.

Over broken mountainous land through scattered timber and sagebrush undergrowth. By triangulation, desc. about 40 ft. over NW. slope.

- 3.25 Draw, drains SW.; asc. about 80 ft. over broken SE. slope.
- 9.25 Point of spur, slopes SW.; desc. about 300 ft. over broken W. slope.
- 12.25 Draw, drains SW.; asc. about 280 ft. over broken SE. slope.
- 20.00 Spur, slopes S.; desc. about 320 ft. over broken NW. slope.
- 24.25 Draw, drains S.; asc. about 280 ft. over broken SE. slope.
- 30.25 Rim of canyon, bears NE. and SW., thence over gently rolling land.
- 40.27 The $\frac{1}{2}$ sec. cor. of secs. 2 and 11, monumented with a sandstone, 18x10x3 ins., set and mkd. as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T21S R20E

$\frac{1}{2}$ S2
S11

1964

from which

A juniper, 10 ins. diam., bears N. $20^{\circ} 15'$ E., 6 lks. dist.; mkd. $\frac{1}{2}$ S2 BT.

Bury original stone cor. alongside iron post, and raise a mound of stone, $2\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

Dependent Resurvey of the Subdivision, T. 21 S., R. 20 E.

CHAINS

N. 89° 59' W., beginning new measurement.

By triangulation, over gently rolling land.

- 5.00 Rim of canyon, bears N. and curves SE.; desc. about 320 ft. over broken W. slope.
- 18.00 Draw, drains S.; asc. about 320 ft. over broken E. slope.
- 30.00 Spur, slopes NE., thence along N. slope.
- 40.08 The cor. of secs. 2, 3, 10 and 11.

Land, broken.

Soil, rocky.

Timber, scattered juniper and pinon.

Undergrowth, sagebrush.

N. 0° 01' W., bet. secs. 2 and 3.

Over rolling mountainous land through medium dense timber. By triangulation, desc. about 40 ft. over gently rolling N. slope.

21. 50 Trail road, bears NE. and SW. curving W.; asc. about 175 ft. over S. slope.
- 39.20 Top of ledge, bears E. and W.
- 40.02 The $\frac{1}{2}$ sec. cor. of secs. 2 and 3, monumented with a sandstone, 20x16x4 ins., set and mkd. as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., on solid sandstone, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T21S R20E

$\frac{1}{2}$
S3 | S2

1964

Bury original stone cor. alongside iron post.

N. 2° 56' W., beginning new measurement.

Asc. 70 ft. over S. slope.

- 2.00 Spur, slopes SE.; desc. 105 ft. over broken and ledgy NE. slope
- 8.39 The closing cor. of secs. 2 and 3, on the N. bdy. of the Tp. (Fourth Standard Parallel South), monumented with a sandstone, 18x12x6 ins., set and mkd. as described in the official record.

Dependent Resurvey of the Subdivision, T. 21 S., R. 20 E.

CHAINS

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 4 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T20S

S35

S3 | S2

G | C

T21S R20E

1964

Bury original stone cor. alongside iron post.

From this cor., the standard cor. of secs. 34 and 35, T. 20 S., R. 20 E., hereinbefore described, bears West, 6.06 chs. dist.

Land, mountainous and rolling.

Soil, rocky.

Timber, medium to scattered juniper and pinon.

Undergrowth, scattered sagebrush.

Point for the N. $\frac{1}{4}$ sec. cor. of sec. 2, on the N. bdy. of the Tp., at mid point bet. the closing cor. of secs. 2 and 3, and the closing cor. of secs. 1 and 2, falls on ledges and cannot be perpetuated.

From this point, the standard $\frac{1}{4}$ sec. cor. of sec. 35, T. 20 S., R. 20 E., monumented with an iron post, $2\frac{1}{2}$ ins. diam., bears West, 5.855 chs. dist., hereinbefore described.

From the cor. of secs. 3, 4, 33 and 34, on the S. bdy. of the Tp.

N. $0^{\circ} 02'$ E., bet. secs. 33 and 34.

Over nearly level desert land through shadscale undergrowth.

31.50 Wash, 5 lks. wide, 2 ft. deep, drains SW.

40.09 The $\frac{1}{4}$ sec. cor. of secs. 33 and 34, monumented with a flint stone, 12x4x3 ins., set and mkd. as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

Dependent Resurvey of the Subdivision, T. 21 S., R. 20 E.

CHAINS

T21S R20E

$$\frac{1}{2}$$

S33	S34
-----	-----

1964

Bury original stone cor. alongside iron post. No accessories available.

N. 0° 02' E., beginning new measurement.

Continue over nearly level desert land.

40.08 The cor. of secs. 27, 28, 33 and 34 monumented with a flint stone, 12x12x5 ins., set and mkd. as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd.

T21S R20E

S28	S27
S33	S34

1964

Bury original stone cor. alongside iron post.

No accessories available.

Land, nearly level desert.

Soil, clay.

No timber.

Undergrowth, shadscale.

From the cor. of secs. 26, 27, 34 and 35.

West, bet. secs. 27 and 34.

Over rolling desert land through shadscale undergrowth. Asc. 30 ft. over NE. slope.

3.10 Small spur, slopes NE.; desc. 5 ft. over NW. slope.

10.00 Head of small draw, drains NE.; asc. 10 ft. over E. slope.

12.90 Low ridge, bears N. and S.; desc. 105 ft. over rolling SW. slope.

40.16 The ½ sec. cor. of secs. 27 and 34, monumented with a granite stone, 20x10x4 ins., set and mkd. as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, with brass cap mkd.

Dependent Resurvey of the Subdivision, T. 21 S., R. 20 E.

CHAINS

T21S R20E

$$\frac{1}{2} \frac{S27}{S34}$$

1964

Bury original stone cor. alongside iron post.

No accessories available.

 N. 89° 58' W., beginning new measurement.

Over nearly level desert land.

32.40 Wash, 10 lks. wide, 4 ft. deep, drains SW.

40.08 The cor. of secs. 27, 28, 33 and 34.

Land, rolling desert E. portion; nearly level W. portion.
Soil, clay.

No timber.

Undergrowth, shadscale.

N. 0° 03' E., bet. secs. 27 and 28.

Over gently rolling land through shadscale undergrowth.

23.20 Wash, 10 lks. wide, 3 ft. deep, drains SW.; asc. 75 ft. over SW. slope.

28.50 Top of ascent, slopes W., thence along W. slope.

40.11 The $\frac{1}{2}$ sec. cor. of secs. 27 and 28, monumented with a flint stone, 16x8x4 ins., set and mkd. as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

T21S R20E

$$\frac{1}{2} \frac{S28}{S27}$$

1964

Bury original stone cor. alongside iron post.

 N. 0° 02' E., beginning new measurement.

Desc. 15 ft. over NW. slope.

14.10 Wash, 20 lks. wide, 6 ft. deep, drains SW.; asc. 30 ft. over SE. slope.

26.30 Telephone line, bears N. 64° W. and S. 64° E.

26.50 Top of ascent, slopes E.; desc. 20 ft. over NE. slope.

Dependent Resurvey of the Subdivision, T. 21 S., R. 20 E.

CHAINS

40.20

The cor. of secs. 21, 22, 27 and 28, monumented with a sandstone, 16x6x4 ins., set and mkd. as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

T21S R20E

S21 | S22
S28 | S27

1964

Bury original stone cor. alongside iron post.

Land, gently rolling desert.

Soil, clay.

No timber.

Undergrowth, shadscale.

From the cor. of secs. 22, 23, 26 and 27.

N. 89° 45' W., bet. secs. 22 and 27.

Over rolling desert land through shadscale undergrowth. Asc. 100 ft. over NE. slope.

9.10

Rim of bench, bears NW. and SE., thence over nearly level land.

37.40

Rim of bench, bears NW. and SE.; desc. 55 ft. over SW. slope.

40.03

The ½ sec. cor. of secs. 22 and 27, monumented with a flint stone, 18x8x5 ins., set and mkd. as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.

T21S R20E

½ S22
S27

1964

Bury original stone cor. alongside iron post.

N. 89° 55' W., beginning new measurement.

Desc. 80 ft. over SW. slope.

4.92

Transmission line, bears N. 17° W. and S. 17° E.

5.65

Denver and Rio Grande Western Railroad, bears N. 17° W. and S. 17° E.

Dependent Resurvey of the Subdivision T. 21 S., R. 20 E.

CHAINS

- 11.72 Center of U. S. Highway 50 and 6, bears N. 27° W. and S. 27° E.
- 27.45 Wash, 10 lks. wide, 2 ft. deep, drains SE.
- 36.20 Wash, 25 lks. wide, 3 ft. deep, drains SE.; asc. 25 ft. over NE. slope.
- 40.14 The cor. of secs. 21, 22, 27 and 28.
Land, rolling desert.
Soil, rocky clay.
No timber.
Undergrowth, shadscale.
-
- N. 0° 02' E., bet. secs. 21 and 22.
Over rolling desert land through shadscale undergrowth.
- 35.35 Center of U. S. Highway 50 and 6, bears N. 81° 20' W. about 40.00 chs. to Thompson, Utah, and curves SE.
- 37.52 Denver and Rio Grande Western Railroad, bears N. 81° 20' W., and curves SE.
- 37.72 Railroad spur, bears N. 81° 20' W., and curves SE.
- 38.37 Transmission line, parallel to railroad.
- 40.14 The $\frac{1}{4}$ sec. cor. of secs. 21 and 22, monumented with a sandstone, 14x6x5 ins., set and mkd. as described in the official record.
At the cor. point
Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.
- T21S R20E
 $\frac{1}{4}$
S21 | S22
1964
- Bury original stone cor. alongside iron post, and raise a mound of stone, 2 $\frac{1}{2}$ ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.
-
- N. 0° 03' E., beginning new measurement.
Asc. 25 ft. over SW. slope.
- 15.00 Trail road, bears E. and W., thence along gentle W. slope.
- 40.07 The cor. of secs. 15, 16, 21 and 22, monumented with a sandstone, 18x8x5 ins., set and mkd. as described in the official record.
At the cor. point
Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

Dependent Resurvey of the Subdivision, T. 21 S., R. 20 E.

CHAINS

T21S R20E

S16	S15
S21	S22

1964

Bury original stone cor. alongside iron post, and raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor.

Land, rolling desert.
Soil, rocky clay.
No timber.
Undergrowth, shadscale.

From the cor. of secs. 14, 15, 22 and 23.

S. 89° 58' W., bet. secs. 15 and 22.

Over rolling desert land through shadscale undergrowth. By triangulation, over series of washes draining S.

1.20 Trail road, bears N. and S.

36.00 Draw, drains SE.

37.90 End triangulation, on small spur, slopes SE.

40.12 The ¼ sec. cor. of secs. 15 and 22, monumented with a flint stone, 18x10x4 ins., set and mkd. as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T21S R20E

¼	S15
	S22

1964

Bury original stone cor. alongside iron post, and raise a mound of stone, 2½ ft. base, 1½ ft. high, N. of cor.

N. 89° 43' W., beginning new measurement.

By triangulation, asc. about 100 ft. over SE. slope over series of washes draining SE.

29.90 Low ridge, bears N. and S. End triangulation; desc. 70 ft. over W. slope.

39.98 The cor. of secs. 15, 16, 21 and 22.

Land, rolling desert.
Soil, rocky clay.
No timber.
Undergrowth, shadscale.

Dependent Resurvey of the Subdivision, T. 21 S., R. 20 E.

CHAINS

N 0° 01' E., bet. secs. 15 and 16.

Over gently rolling desert land through shadscale undergrowth. Asc. 40 ft. along gently rolling W. slope.

1.20 Trail Road, bears NE. and SW.

6.50 Wash, 30 lks. wide, 4 ft. deep, drains SW.

40.14 The $\frac{1}{4}$ sec. cor. of secs. 15 and 16, monumented with a flint stone, 14x6x4 ins., set and mkd. as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T21S R20E

	$\frac{1}{4}$	
S16		S15

1964

Bury original stone cor. alongside iron post, and raise a mound of stone, $2\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

N. 0° 02' E., beginning new measurement.

Desc. 30 ft. over NW. slope.

24.00 Enter dense sagebrush; asc. 40 ft. over SW. slope.

27.40 S. edge of small reservoir.

33.75 N. edge of reservoir.

40.12 The cor. of secs. 9, 10, 15 and 16, monumented with a sandstone, 18x12x8 ins., set and mkd. as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T21S R20E

S9		S10
S16		S15

1964

Bury original stone cor. alongside iron post, and raise a mound of stone, $2\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

Land, rolling desert.

Soil, clay.

No timber.

Undergrowth, shadscale.

From the true point for the cor. of secs. 10, 11, 14 and 15.

N. 89° 59' W., bet. secs. 10 and 15.

Dependent Resurvey of the Subdivision, T. 21 S., R 20 E.

CHAINS	
1.50	Over broken land; asc. 80 ft. over solid sandstone ledges facing SE. Rim of mesa, bears NE. and SW.; enter dense pinon and juniper timber; desc. 45 ft. over rocky mesa.
40.00	The $\frac{1}{4}$ sec. cor. of secs. 10 and 15, monumented with a sandstone, 18x10x5 ins., set and mkd. as described in the official record. Original bearing trees were not found. At the cor. point Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., on solid stone, and in a mound of stone, 4 ft. base to top, with brass cap mkd. T21S R20E $\frac{1}{4} \frac{S10}{S15}$ 1964 Bury original stone cor. in mound of stone, alongside iron post.
1.00	N. 89° 42' W., beginning new measurement. Continue over rocky mesa through dense timber. Rim of mesa, bears NW. and SE.; leave timber, thence by triangulation, desc. about 680 ft. over broken and ledgy SW. slope.
39.96	The cor. of secs. 9, 10, 15 and 16. Land, broken. Soil, rocky clay. Timber, dense pinon and juniper on mesa. Undergrowth, scattered shadscale and sagebrush W. portion.
7.60	N. 0° 03' E., bet. secs. 9 and 10. Over rolling desert land at base of Book Cliffs, through sagebrush and shadscale undergrowth. Wash, 20 lks. wide, 3 ft. deep, drains SW.; asc. 30 ft. over S. slope.
20.00	Small spur, slopes W.; desc. 20 ft. over gentle N. slope.
27.00	Wash, drains W., thence over nearly level land.
40.10	The $\frac{1}{4}$ sec. cor. of secs. 9 and 10, monumented with a flint stone, 18x6x4 ins., set and mkd. as described in the official record. At the cor. point Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

Dependent Resurvey of the Subdivision, T. 21 S., R. 20 E.

CHAINS

T21S R20E

$$\frac{1}{2}$$

S9 | S10

1964

Bury original stone cor. alongside iron post, and raise a mound of stone, $2\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

N. $0^{\circ} 25'$ W., beginning new measurement.

By triangulation, continue over gently rolling desert land.

11.00 Wash, drains SW.

26.00 Base of Book Cliffs, bears NW. and SE.; asc. about 250 ft. over steep and broken SW. slope.

40.05 Point for the cor. of secs. 3, 4, 9 and 10 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 14 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T21S R20E

$$\frac{S4 | S3}{S9 | S10}$$

1964

Land, nearly level desert S. portion, broken N. portion. Soil, rocky clay.
No timber.
Undergrowth, sagebrush and shadscale.

From the cor. of secs. 2, 3, 10 and 11.

S. $89^{\circ} 59'$ W., bet. secs. 3 and 10.

Over rolling mesa through dense sagebrush. By triangulation, asc. about 40 ft.

22.25 Enter dense timber.

39.10 Trail road, bears NW. and SE.

40.09 The $\frac{1}{2}$ sec. cor. of secs. 3 and 10, monumented with a sandstone, $16 \times 12 \times 3$ ins., set and mkd. as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T21S R20E

$$\frac{1}{2} \frac{S3}{S10}$$

1964

Dependent Resurvey of the Subdivision, T. 21 S., R. 20 E.

CHAINS

from which

A juniper, 8 ins. diam., bears S. 22° 20' E., 24 lks. dist., mkd. $\frac{1}{2}$ S10 BT.

A pinon, 10 ins. diam., bears N. 34° W., 39 lks. dist., mkd. $\frac{1}{2}$ S 3 BT.

Bury original stone cor. alongside iron post.

S. 89° 51' W., beginning new measurement.

By triangulation, continue over mesa through dense timber.

37.00 Rim of mesa, curves N. and SE.; desc. about 200 ft. over broken SW. slope. Leave timber.

40.14 The cor. of secs. 3, 4, 9 and 10.

Land, broken.

Soil, rocky clay.

Timber, dense pinon and juniper central portion.

Undergrowth, dense sagebrush E. portion; shadscale W. portion.

N. 0° 10' E., bet. secs. 3 and 4.

Over broken land through shadscale undergrowth. By triangulation; asc. about 80 ft. over SW. slope.

3.50 Top of ascent, slopes sharply W.; desc. about 80 ft. over NW. slope.

11.50 Head of draw, drains W.; asc. about 250 ft. over broken and ledgy SW. slope.

18.05 Spur, slopes W.; enter dense timber; desc. 120 ft. over N. slope.

29.00 Draw, drains NW.; asc. about 80 ft. over SW. slope.

35.00 Spur, slopes W.; desc. about 40 ft. over NW. slope.

40.05 The $\frac{1}{2}$ sec. cor. of secs. 3 and 4, monumented with a sandstone, 18x10x5 ins., set and mkd. as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., on solid sandstone, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T21S R20E

$\frac{1}{2}$

S4|S3

1964

Bury original stone cor. in mound of stone, alongside iron post.

Dependent Resurvey of the Subdivision, T. 21 S., R. 20 E.

CHAINS

N. $0^{\circ} 02'$ W., beginning new measurement.

By triangulation, desc. about 50 ft. over NW. slope.

4.50 Draw, drains SW.; asc. about 60 ft. over S. slope.

8.51 The closing cor. of secs. 3 and 4, on the N. bdy. of the Tp. (Fourth Standard Parallel South), monumented with a sandstone, 18x10x5 ins., set and mkd. as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 12 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T20S
 $\frac{S34}{S4|S3}$
 CC
 T21S R20E
 1964

Bury original stone cor. alongside iron post.

From this cor., the standard cor. of secs. 33 and 34, T. 20 S., R. 20 E., monumented with an iron post, $2\frac{1}{2}$ ins. diam., hereinbefore described, bears S. $89^{\circ} 54'$ W., 6.02 chs. dist.

Land, broken and mountainous.

Soil, rocky clay.

Timber, dense pinon and juniper N. portion.

Undergrowth, shadscale S. portion.

Point for the N. $\frac{1}{4}$ sec. cor. of sec. 3, on the N. bdy. of the Tp., at mid point bet. the closing cor. of secs. 3 and 4, and the closing cor. of secs. 2 and 3.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 16 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T20S
 $\frac{\frac{1}{4} S3}{T21S R20E}$
 1964

From this cor., the standard $\frac{1}{4}$ sec. cor. of sec. 34, T. 20 S., R. 20 E., monumented with an iron post, $2\frac{1}{2}$ ins. diam., hereinbefore described, bears N. $89^{\circ} 46'$ W., 5.70 chs. dist.

From the cor. of secs. 4, 5, 32 and 33, on the S. bdy. of the Tp.

N. $1^{\circ} 17'$ W., bet. secs. 32 and 33.

Dependent Resurvey of the Subdivision, T. 21 S., R. 20 E.

CHAINS

Over rolling desert land through shadscale undergrowth. Along E. slope of small mesa.

40.45

The 1/4 sec. cor. of secs. 32 and 33, monumented with a flint stone, 18x10x3 ins., set and mkd. as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 12 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T21S R20E

1/4

S32|S33

1964

Bury original stone cor. alongside iron post.

N. 1° 08' E., beginning new measurement.

Continue along E. slope of small mesa.

39.71

The cor. of secs. 28, 29, 32 and 33, monumented with a sandstone, 12x8x3 ins., set and mkd. as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 18 ins. in the ground, and in a collar of stone, with brass cap mkd.

T21S R20E

S29|S28

S32|S33

1964

Bury original stone cor. alongside iron post.

Land, rolling E. slope of small mesa.

Soil, rocky clay.

No timber.

Undergrowth, shadscale.

From the cor. of secs. 27, 28, 33 and 34.

N. 89° 59' W., bet. secs. 28 and 33.

Over gently rolling desert land through shadscale undergrowth.

21.30

Wash, 15 lks. wide, 6 ft. deep, drains SE.

32.40

Wash, 10 lks. wide, 4 ft. deep, drains S.

34.15

Wash, 10 lks. wide, 3 ft. deep, drains SW.

Dependent Resurvey of the Subdivision, T. 21 S., R. 20 E.

CHAINS	
37.65	Wash, 15 lks. wide, 8 ft. deep, drains SE.
40.04	The $\frac{1}{4}$ sec. cor. of secs. 28 and 33, monumented with a sandstone, 12x10x4 ins., set and mkd. as described in the official record.
	At the cor. point
	Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T21S R20E
	$\frac{1}{4}$ $\frac{S28}{S33}$
	1964
	Bury original stone cor. alongside iron post.
	No accessories available.
	N. $89^{\circ} 56'$ W., beginning new measurement.
7.85	Wash, 15 lks. wide, 4 ft. deep, drains SW.; asc. 175 ft. over E. slope.
33.65	Rim of small mesa, bears N. and S., thence over level land.
39.99	The cor. of secs. 28, 29, 32 and 33.
	Land, gently rolling desert E. portion; rolling W. portion.
	Soil, rocky clay.
	No timber.
	Undergrowth, shadscale.
	N. $0^{\circ} 03'$ W., bet. secs. 28 and 29.
	Over rolling land through shadscale undergrowth.
7.60	Rim of mesa, bears S. and curves NW.; desc. 95 ft. over NE. slope.
22.00	Base of descent; asc. 140 ft. over rolling SE. slope.
40.09	Point for the $\frac{1}{4}$ sec. cor. of secs. 28 and 29 at proportionate dist.; there is no remaining evidence of the original cor.
	Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.
	T21S R20E
	$\frac{1}{4}$ S29 S28
	1964
	Asc. 25 ft. over SE. slope.
46.50	Rim of mesa, bears NE. and SW., thence over nearly level land.

Dependent Resurvey of the Subdivision, T. 21 S., R. 20 E.

CHAINS

- 59.70 Rim of mesa, bears NE. and SW.; desc. 75 ft. over NW. slope.
- 63.20 Base of descent, thence over nearly level land.
- 68.70 Trail road, bears N. 80° E. and S. 80° W.
- 70.90 Trail road, bears NE. and SW.
- 80.18 The cor. of secs. 20, 21, 28 and 29, monumented with a sandstone, 16x16x6 ins., set and mkd. as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone to top, with brass cap mkd.

T21S R20E
 S20|S21
 S29|S28

1964

Bury original stone cor. alongside iron post.

Land, rolling desert.
 Soil, rocky clay.
 No timber.
 Undergrowth, shadscale.

- From the cor. of secs. 21, 22, 27 and 28.
 West, bet. secs. 21 and 28.
 Over rolling desert land through shadscale undergrowth.
- 21.30 Base of low mesa, bears NE. and SW.; asc. 115 ft. over SE. slope.
- 25.00 Rim of mesa, bears NE. and SW., thence over nearly level land.
- 27.80 Telephone line, bears N. 64° W. and S. 64° E.
- 30.65 Trail road, bears N. 40° W. and S. 40° E.
- 36.40 Wash, drains S.
- 40.17 Point for the ¼ sec. cor. of secs. 21 and 28 at proportionate dist.; there is no remaining evidence of the original cor.
- Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T21S R20E
 ¼ S21
 S28

1964

Raise a mound of stone, 2½ ft. base, 1½ ft. high, N. of cor.

Dependent Resurvey of the Subdivision, T. 21 S., R. 20 E.

CHAINS

From this cor., U.S.C. and G.S. triangulation station "Thompson", bears N. 40° 51' E., 9.04 chs. dist.

Continue over nearly level land.

- 45.65 Rim of mesa, bears NE. and SW.; desc. 115 ft. over NW. slope.
- 54.90 Trail road, bears NE. and SW.
- 64.60 Wash, 5 lks. wide, 4 ft. deep, drains NW.
- 67.10 Wash, 10 lks. wide, 5 ft. deep, drains NW., thence over nearly level land.
- 74.80 Trail road, bears N. 20° E. and S. 20° W.
- 80.34 The cor. of secs. 20, 21, 28 and 29.

Land, rolling desert.
Soil, rocky clay.
No timber.
Undergrowth, shadscale.

N. 0° 03' E., bet. secs. 20 and 21.

Over nearly level desert land through shadscale undergrowth.

- 3.20 Telephone line, bears N. 74° 30' E. and S. 74° 30' W.
- 3.80 Wash, 50 lks. wide, 8 ft. deep, drains S. 65° W.
- 6.90 Road, bears N. 64° E. and S. 64° W.
- 8.30 Power line, bears N. 60° E. and S. 60° W.
- 9.70 S. edge of old air strip, bears N. 70° E.
- 10.50 N. edge of old air strip, bears N. 70° E.
- 13.30 Wash, 2.00 chs. wide, 15 ft. deep, drains S. 65° W. Enter tall sagebrush.
- 25.35 Fence, bears N. 40° E. and S. 40° W.
- 27.40 S. edge of small pond.
- 29.45 Fence, bears N. 80° E., on N. edge of small pond.
- 35.13 SW. cor. of fence around Thompson cemetery.
- 40.16 The 1/2 sec. cor. of secs. 20 and 21, monumented with a sand stone, 18x8x6 ins., set and mkd. as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.

Dependent Resurvey of the Subdivision, T. 21 S., R. 20 E.

CHAINS

T21S R20E

$$\begin{array}{c} \frac{1}{2} \\ \text{S20} | \text{S21} \\ | \\ \text{1964} \end{array}$$

1964

Bury original stone cor. alongside iron post, and raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor.

N. 0° 03' W., beginning new measurement.

Continue over nearly level land.

- 0.25 Center of U. S. Highway 50 and 6, bears N. 69° 40' E. and S. 69° 40' W.
- 2.30 S. edge of stock corral.
- 5.37 Denver and Rio Grande Western Railroad, bears E. and W.
- 5.57 Railroad spur, bears E. and W.
- 5.77 Railroad spur, bears E. and W.
- 5.97 Railroad spur, bears E. and W.
- 6.10 Telephone line, parallel to railroad.
- 9.80 Railroad spur, bears N. 82° 20' W. and S. 82° 20' E.
- 10.00 Railroad spur, bears N. 82° 20' W. and S. 82° 20' E.
- 11.20 Road, parallel to railroad spur.
- 24.45 Trail road, bears S. 65° W. and N. 65° E.
- 24.95 Power line, bears about N. 65° E. and S. 65° W.
- 40.18 The cor. of secs. 16, 17, 20 and 21, monumented with a sandstone, 28x10x5 ins., set and mkd. as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

T21S R20E

$$\begin{array}{c} \text{S17} | \text{S16} \\ \text{S20} | \text{S21} \\ | \\ \text{1964} \end{array}$$

1964

Bury original stone cor. alongside iron post.

Land, nearly level desert.

Soil, clay.

No timber.

Undergrowth, shadscale.

From the cor. of secs. 15, 16, 21 and 22.

S. 89° 59' W., bet. secs. 16 and 21.

Dependent Resurvey of the Subdivision, T. 21 S., R. 20 E.

CHAINS

- Over gently rolling desert land through shadscale undergrowth.
- 1.20 Trail road bears NE. and SW.
- 3.50 Wash, 40 lks. wide, 5 ft. deep, drains S.
- 33.30 Gravel road, bears N. to Uintah-Ouray Indian Reservation and S. to Segoe, Utah; fence cor., bears N. about 20 lks. with fence bearing N. and W.
- 34.15 Wash, 40 lks. wide, 9 ft. deep, drains S.
- 40.21 The $\frac{1}{4}$ sec. cor. of secs. 16 and 21, monumented with a sandstone, 14x10x4 ins., set and mkd. as described in the official record.
- At the cor. point
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.
- T21S R20E
 $\frac{1}{4}$ $\frac{S16}{S21}$
 1964
- Bury original stone cor. alongside iron post, and raise a mound of stone, $2\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, N. of cor.
- Cor. located on south side of E. and W. fence line.
-
- N. $89^{\circ} 59'$ W., beginning new measurement.
- Continue over nearly level land along S. side of fence.
- 6.90 Fence, bears N.; end of E. and W. fence line.
- 7.30 Wash, 2.00 chs. wide, 15 ft. deep, drains S.
- 13.10 Power line, bears NE. and SW.
- 40.10 The cor. of secs. 16, 17, 20 and 21.
- Land, gently rolling E. portion; nearly level W. portion.
 Soil, clay.
 No timber.
 Undergrowth, shadscale.
-
- N. $0^{\circ} 03'$ W., bet. secs. 16 and 17.
- Over broken land through shadscale undergrowth. By triangulation; asc. about 280 ft. over SE. slope.
- 28.50 End triangulation on clay spur, slopes SW.
- 28.60 Point selected for the witness $\frac{1}{4}$ sec. cor. of secs. 16 and 17; there is no remaining evidence of the original witness cor.
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

Dependent Resurvey of the Subdivision, T. 21 S., R. 20 E.

CHAINS

T21S R20E
 WC $\frac{1}{2}$
 S17↑S16
 1964

No accessories available.

Continue by triangulation; asc. about 600 ft. over broken and ledgy SW. slope.

- 40.04 Point for the $\frac{1}{2}$ sec. cor. of secs. 16 and 17 at proportionate dist. falls on ledges facing SW. and cannot be perpetuated.
- 44.30 Rim of mesa, top of ledge, about 200 ft. high, bears NW. and SE.; end triangulation. Enter dense timber. By triangulation; desc. over broken mesa.
- 78.00 Draw, drains NW. curving NE.
- 80.08 The cor. of secs. 8, 9, 16 and 17, monumented with a sandstone, 14x12x3 ins., set and mkd. as described in the official record.

from which the original bearing trees

A juniper, 10 ins. diam., bears N. 55° E., 57 lks. dist., mkd. T21S R20E S9 BT.

A pinon, 15 ins. diam., bears S. 11° E., 169 lks. dist., mkd. T21S R20E S16 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., on solid rock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T21S R20E
 $\frac{S8 \mid S9}{S17 \mid S16}$
 1964

Bury original stone cor. in mound of stone alongside iron post.

Land, broken.

Soil, rocky clay.

Timber, dense pinon and juniper on mesa; no timber S. portion.

Undergrowth, shadscale S. portion; scattered sagebrush on mesa.

From the cor. of secs. 9, 10, 15 and 16.

S. 89° 57' W., bet. secs. 9 and 16.

Over rolling desert land through shadscale and sagebrush undergrowth.

- 8.45 Gravel road from Thompson to Sego, bears N. and S.

Dependent Resurvey of the Subdivision, T. 21 S., R. 20 E.

CHAINS	
12.40	Wash, 1.50 chs. wide, 8 ft. deep, in Thompson Canyon, drains S.; asc. 30 ft. over gentle E. slope.
20.60	Power line, bears N. 5° E. and S. 5° W.
29.50	Base of ridge, bears N. and S.; asc. 130 ft. over steep E. slope. Enter scattered timber.
36.75	Spur, slopes N.; desc. 60 ft. over steep W. slope.
38.90	Wash, 10 lks. wide, 4 ft. deep, drains NE.; asc. 20 ft. over E. slope.
40.15	Point for the $\frac{1}{4}$ sec. cor. of secs. 9 and 16 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 14 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.
	T21S R20E S9 $\frac{1}{4}$ ——— S16 1964
	Thence by triangulation; asc. about 560 ft. over steep and broken E. slope.
55.50	Rim of mesa, bears N. and S. End triangulation; enter dense timber. Asc. 40 ft. over gentle E. slope.
67.40	Low ridge, on mesa, bears N. and S.; thence by triangulation; desc. about 50 ft. over W. slope.
80.30	The cor. of secs. 8, 9, 16 and 17. Land, rolling desert E. portion; broken W. portion. Soil, rocky clay. Timber, scattered central portion; dense pinon and juniper W. portion. Undergrowth, shadscale and sagebrush E. portion; sagebrush W. portion.
	North, bet. secs. 8 and 9. Over broken mesa through dense timber. Desc. 20 ft. over gentle NW. slope.
11.35	Rim of draw, bears NE. and SW.; desc. 100 ft. over broken NW. slope.
24.30	Draw, drains NE.; asc. 65 ft. over broken SE. slope.
32.90	Spur, slopes NE.; desc. 30 ft. over NW. slope.
40.00	The $\frac{1}{4}$ sec. cor. of secs. 8 and 9, monumented with a sandstone, 20x12x3 ins., set and mkd. as described in the official record, from which the original bearing trees

Dependent Resurvey of the Busdivision, T. 21 S., R. 20 E.

CHAINS

A pinon, 16 ins. diam., bears N. 62° 30' E., 34 lks. dist., mkd. $\frac{1}{4}$ S9 BT.

A pinon, 16 ins. diam., bears N. 32° 30' W., 137 lks. dist., mkd. $\frac{1}{4}$ S8 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T21S R20E

$\frac{1}{4}$
S8|S9

1964

Bury original stone cor. alongside iron post.

N. 0° 02' W., beginning new measurement.

By triangulation; desc. about 200 ft. over N. changing to NE. slope.

18.00 Draw SE.; asc. about 160 ft. over SW. slope.

31.30 Ridge, bears E. and W. End triangulation; desc. 35 ft. over N. slope.

40.08 The cor. of secs. 4, 5, 8 and 9, monumented with a sandstone, 16x12x8 ins., set and mkd. as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., on solid rock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T21S R20E

$\frac{S5|S4}{S8|S9}$

1964

Bury original stone cor. in mound of stone alongside iron post.

Land, broken mesa.

Soil, rocky.

Timber, dense pinon and juniper.

Undergrowth, scattered sagebrush.

From the cor. of secs. 3, 4, 9 and 10.

S. 89° 55' W., bet. secs. 4 and 9.

Over broken land through scattered shadscale and sagebrush undergrowth. By triangulation, desc. about 250 ft. over steep W. slope.

7.15 Gravel road, from Thompson to Segó, bears N. and S.

De endent Reserve of the Subdivision T. 21 S. R. 20 E.
CHAINS

- 12.50 Wash, in Thompson Canyon, drains S.; asc. about 400 ft. over broken and ledgy E. slope.
- 27.95 Rim of canyon, bears N. and S.; asc. 20 ft. over gentle NE. slope. End triangulation. Enter timber.
- 40.14 The $\frac{1}{4}$ sec. cor. of secs. 4 and 9, monumented with a sandstone, 18x10x5 ins., set and mkd. as described in the official record.

from which the original bearing tree

A pinon, 16 ins. diam., bears S. $41^{\circ} 15'$ E., 89 lks. dist., mkd. $\frac{1}{4}$ S 9 BT.

There is no remaining evidence of the other original bearing tree.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T21S R20E

$\frac{1}{4}$ $\frac{S4}{S9}$

1964

Bury original stone cor. alongside iron post.

N. $89^{\circ} 56'$ W., beginning new measurement.

By triangulation; along broken N. slope.

- 4.95 Head of draw, drains NW.
- 10.45 Head of draw, drains N.
- 16.45 Head of draw, drains N.
- 24.65 End triangulation on small ridge, bears N. and S.; continue along general N. slope.
- 39.94 The cor. of secs. 4, 5, 8 and 9.

Land, broken and mountainous.

Soil, rocky clay.

Timber, medium dense pinon and juniper W. portion.

Undergrowth, shadscale and sagebrush E. portion.

N. $0^{\circ} 16'$ W., bet. secs. 4 and 5.

Over broken mountainous land through medium dense pinon and juniper timber. By triangulation; desc. about 80 ft. over N. slope.

- 5.00 Draw, drains SE. curving E.; asc. about 50 ft. over SW. slope.
- 15.00 Trail road, bears about N. 75° E. and S. 75° W.; asc. about 300 ft. over broken and ledgy SE. slope.

Dependent Resurvey of the Subdivision, T. 21 S., R. 20 E.

CHAINS

32.60 End triangulation on spur, slopes S. 10° W.; desc. 25 ft. over NW. slope.

39.96 The $\frac{1}{2}$ sec. cor. of secs. 4 and 5, monumented with a sandstone, 14x6x4 ins., set and mkd. as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 12 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T21S R20E

$\frac{1}{2}$
S5|S4

1964

Bury original stone cor. alongside iron post.

N. $0^{\circ} 56'$ E., beginning new measurement.

Asc. 55 ft. over SW. slope.

6.75 Spur, slopes SE.

8.52 The closing cor. of secs. 4 and 5, on the N. bdy. of the Tp., (Fourth Standard Parallel South), monumented with a sandstone, 24x14x4 ins., set and mkd. as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T20S R20E

S33
S5|S4

CC

T21S R20E

1964

Bury original stone cor. alongside iron post.

From this cor., the standard cor. of secs. 32 and 33, T. 20 S., R. 20 E., monumented with an iron post, $2\frac{1}{2}$ ins. diam., hereinbefore described, bears S. $89^{\circ} 49'$ W., 6.05 chs. dist.

Land, broken and mountainous.

Soil, rocky clay.

Timber, medium dense pinon and juniper.

Undergrowth, scattered sagebrush.

Point for the N. $\frac{1}{2}$ sec. cor. of sec. 4, on the N. bdy. of the Tp., and midpoint bet. the closing cor. of secs. 4 and 5, and the closing cor. of secs. 3 and 4.

Dependent Resurvey of the Subdivision, T. 21 S., R. 20 E.
CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 16 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T20S

$\frac{1}{4}$ S4
T21S R20E

1964

From this cor., the standard $\frac{1}{4}$ sec. cor. of sec. 33, T. 20 S., R. 20 E., monumented with an iron post, $2\frac{1}{2}$ ins. diam., hereinbefore described, bears N. $89^{\circ} 56' W.$, 6.15 chs. dist.

From the cor. of secs. 5, 6, 31 and 32, on the S. bdy. of the Tp.

N. $0^{\circ} 03' E.$, bet. secs. 31 and 32.

Over rolling desert land through shadscale undergrowth. Asc. 115 ft. over rolling S. slope.

23.75 Spur, slopes SW.; desc. 90 ft. over NW. slope.

26.75 Base of spur, thence over gently rolling land.

40.03 The $\frac{1}{4}$ sec. cor. of secs. 31 and 32, monumented with a flint stone, 20x10x4 ins., set and mkd., as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

T21S R20E

$\frac{1}{4}$
S31 | S32

1964

Bury original stone cor. alongside iron post.

N. $0^{\circ} 04' E.$, beginning new measurement.

Continue over gently rolling desert land.

40.14 The cor. of secs. 29, 30, 31 and 32, monumented with a sandstone, 18x6x6 ins., set and mkd. as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T21S R20E

S30 | S29
S31 | S32

1964

Dependent Resurvey of the Subdivision, T. 21 S., R. 20 E.

CHAINS

Bury original stone cor. alongside iron post, and raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor.

Land, rolling desert.

Soil, clay.

No timber.

Undergrowth, shadscale.

From the cor. of secs. 28, 29, 32 and 33.

N. 89° 57' W., bet. secs. 29 and 32.

Over rolling desert land through shadscale undergrowth. Asc. 30 ft. over rolling SE. slope.

9.85 Gravel road, bears N. 5° E. and S. 5° W.

38.15 Rim of mesa, bears N. and S.; desc. 60 ft. over steep W. slope.

40.17 The ½ sec. cor. of secs. 29 and 32, monumented with a flint stone, 14x8x2 ins., set and mkd., as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T21S R20E

½ $\frac{S29}{S32}$

1964

Bury original stone cor. alongside iron post, and raise a mound of stone, 2½ ft. base, 1½ ft. high, N. of cor.

N. 89° 57' W., beginning new measurement.

Desc. 30 ft. over W. slope.

3.00 Draw, drains SW.; asc. 20 ft. over SE. slope.

10.20 Spur, slopes SW.; desc. 55 ft. over NW. slope.

40.05 The cor. of secs. 29, 30, 31 and 32.

Land, rolling desert.

Soil, clay.

No timber.

Undergrowth, shadscale.

West, bet. secs. 30 and 31.

Over rolling desert land through shadscale undergrowth.

8.70 Wash, 20 lks. wide, 6 ft. deep, drains S.

20.40 Gravel road, bears N. 38° E. and S. 38° W.


Dependent Resurvey of the Subdivision T. 21 S. R. 20 E.

CHAINS

- 22.75 Transmission line, parallel to gravel road.
- 33.90 Wash, 1.00 ch. wide, 15 ft. deep, drains S.
- 40.18 The $\frac{1}{4}$ sec. cor. of secs. 30 and 31, monumented with a sandstone, 12x10x6 ins., set and mkd. as described in the official record.
- At the cor. point
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.
- T21S R20E
- $\frac{1}{4}$ $\frac{S30}{S31}$
- 1964
- Bury original stone cor. alongside iron post.
-
- N. $89^{\circ} 41'$ W., beginning new measurement.
- Continue over gently rolling desert land.
- 39.71 The cor. of secs. 30 and 31, on the W. bdy. of the Tp., monumented with a sandstone, 8x6x4 ins., set and mkd. as described in the official record.
- At the cor. point
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with glass at base, and in a collar of stone, with brass cap mkd.
- T21S
R19E R20E
- S36 $\frac{S30}{S31}$
- 1964
- Bury original stone cor. alongside iron post.
- From this cor., the cor. of secs. 25 and 36, T. 21 S., R. 19 E., bears N. $0^{\circ} 10'$ E., 5.38 chs. dist., monumented with an iron post, 2 ins. diam., set, mkd. and witnessed as described in the official record.
- Land, gently rolling desert.
Soil, clay.
No timber.
Undergrowth, shadscale.
-
- The W. $\frac{1}{4}$ sec. cor. of sec. 31, on the W. bdy. of the Tp., monumented with a sandstone, 16x8x4 ins., set and mkd. as described in the official record.
- At the cor. point
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

Dependent Resurvey of the Subdivision, T. 21 S., R. 20 E.

CHAINS



Bury original stone cor. alongside iron post.

From this cor., the E. 1/4 sec. cor. of sec. 36, T. 21 S., R. 19 E., monumented with an iron post, 1 in. diam., set, mkd. and witnessed as described in the official record, bears N. 0° 15' E., 5.515 chs. dist.

From the cor. of secs. 29, 30, 31 and 32.


North, bet. secs. 29 and 30.

Over gently rolling desert land through shadscale undergrowth.

- 10.15 Wash, 60 lks. wide, 7 ft. deep, drains SW.
- 27.23 Gravel road, bears N. 38° E. and S. 38° W.
- 29.50 Transmission line, parallel to gravel road.
- 40.14 The 1/4 sec. cor. of secs. 29 and 30, monumented with a sandstone, 14x6x4 ins., set and mkd. as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.



Bury original stone cor. alongside iron post, and raise a mound of stone, 2 1/2 ft. base, 1 1/2 ft. high, W. of cor.

N. 0° 03' E., beginning new measurement.

Continue over gently rolling desert land.

- 6.70 Wash, 10 lks. wide, 4 ft. deep, drains SW.
- 17.35 Wash, 80 lks. wide, 10 ft. deep, drains SW.
- 20.57 Transmission line, bears N. 74° 20' E. and S. 74° 20' W.
- 40.18 The cor. of secs. 19, 20, 29 and 30, monumented with a granite stone, 14x8x8 ins., set and mkd. as described in the official record.

At the cor. point

Dependent Resurvey of the Subdivision, T. 21 S., R. 20 E.

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

T21S R20E

S19	S20
S30	S29

1964

Bury original stone cor. alongside iron post.

Land, gently rolling desert.

Soil, clay.

No timber.

Undergrowth, shadscale.

From the cor. of secs. 20, 21, 28 and 29.

N. $89^{\circ} 45'$ W., bet. secs. 20 and 29.

Over nearly level desert land through shadscale undergrowth.

- 7.40 Wash, 1.00 ch. wide, 8 ft. deep, drains SW.
- 11.00 Telephone line, bears N. $74^{\circ} 30'$ E. and S. $74^{\circ} 30'$ W.
- 11.85 Wash, 2.00 chs. wide, 10 ft. deep, drains SW.
- 13.20 Gravel road, bears N. 74° E. and S. 74° W.
- 19.65 Transmission line, bears N. 74° E. and S. 74° W.
- 39.91 The $\frac{1}{2}$ sec. cor. of secs. 20 and 29, monumented with a sandstone, 12x10x3 ins., set and mkd. as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

T21S R20E

$\frac{1}{2}$ S20
S29

1964

Bury original stone cor. alongside iron post.

N. $89^{\circ} 57'$ W., beginning new measurement.

Continue over nearly level desert land.

- 27.55 Wash, 70 lks. wide, 8 ft. deep, drains SW.

- 40.15 The cor. of secs. 19, 20, 29 and 30.

Dependent Resurvey of the Subdivision, T. 21 S., R. 20 E.

CHAINS

Land, nearly level desert.
Soil, clay.
No timber.
Undergrowth, shadscale.

N. 89° 54' W., bet. secs. 19 and 30.

Over gently rolling desert land through shadscale undergrowth.

26.35 Wash, 10 lks. wide, 2 ft. deep, drains SW.

32.50 Wash, 10 lks. wide, 3 ft. deep, drains SW.

35.53 Center of U. S. Highway 50 and 6, bears N. 69° 40' E. and S. 69° 40' W.

40.07 Point for the $\frac{1}{4}$ sec. cor. of secs. 19 and 30, at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with glass at base, and brass cap mkd.

T21S R20E

$\frac{1}{4}$ $\frac{S19}{S30}$

1964

Raise a mound of stone, 2½ ft. base, 1½ ft. high, N. of cor.

Continue over gently rolling desert land.

59.50 Transmission line, bears N. 68° E. and S. 68° W.

63.10 Trail road, bears irregularly N. and S.

79.73 The cor. of secs. 19 and 30, on the W. bdy. of the Tp., monumented with a sandstone, 18x10x10 ins., set and mkd. as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with glass at base, and brass cap mkd.

T21S R20E

R19E
S25 | $\frac{S19}{S30}$

1964

Bury original stone cor. alongside iron post.

From this cor., the cor. of secs. 24 and 25, T. 21 S., R. 19 E., bears N. 0° 15' W., 5.24 chs. dist., monumented with an iron post; 2 ins. diam., set, mkd. and witnessed as described in the official record.

Land, gently rolling desert.
Soil, clay.
No timber.
Undergrowth, shadscale.

Dependent Resurvey of the Subdivision, T. 21 S., R. 20 E.

CHAINS

The W. 1/4 sec. cor. of sec. 30, on the W. bdy. of the Tp., monumented with a sandstone, 6x6x3 ins., set and mkd. as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with glass at base, and brass cap mkd.

T21S
R19E R20E
1/4
S30

1964

Bury original stone cor. alongside iron post.

From this cor., the E. 1/4 sec. cor. of sec. 25, T. 21 S., R. 19 E., bears North, 5.39 chs. dist., monumented with an iron post, 1 in. diam., set, mkd. and witnessed as described in the official record:

From the cor. of secs. 19, 20, 29 and 30.

N. 0° 01' E., bet. secs. 19 and 20.

Over gently rolling desert land through shadscale undergrowth.

13.55 Center of U. S. Highway 50 and 6, bears N. 69° 40' E. and S. 69° 40' W.

25.87 Denver and Rio Grande Western Railroad, bears about N. 60° E. and curves W.

26.70 Telephone line, parallel to railroad.

28.75 Transmission line, bears about N. 68° E. and S. 68° W.

40.11 The 1/4 sec. cor. of secs. 19 and 20, monumented with a sandstone, 18x8x4 ins., set and mkd. as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

T21S R20E
1/4
S19 S20

1964

Bury original stone cor. alongside iron post.

N. 0° 01' W., beginning new measurement.

Continue over gently rolling desert land.

Dependent Resurvey of the Subdivision, T. 21 S., R. 20 E.

CHAINS

- 33.40 Base of low bench, bears generally E. and W.; asc. 35 ft. over S. slope.
- 37.90 Rim of bench, bears E. and W., thence over gently rolling bench land.
- 40.06 Point for the cor. of secs. 17, 18, 19 and 20, at proportionate dist.; there is no remaining evidence of the original cor.
- Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with glass at base, and brass cap mkd.
- T21S R20E
 $\frac{S18}{S19} \mid \frac{S17}{S20}$
 1964
- Raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor.
- Land, gently rolling desert S. portion; gently rolling bench land N. portion.
 Soil, rocky clay.
 No timber.
 Undergrowth, shadscale.
-
- From the cor. of secs. 16, 17, 20 and 21.
- S. 89° 55' W., bet. secs. 17 and 20.
- Over gently rolling desert land through shadscale undergrowth. Desc. 25 ft. over gently rolling SW. slope over series of small washes draining SW.
- 10.00 Wash, 20 lks. wide, 6 ft. deep, drains SW.
- 16.00 Wash, 15 lks. wide, 5 ft. deep, drains SW.
- 40.04 The ½ sec. cor. of secs. 17 and 20, monumented with a sandstone, 14x14x8 ins., set and mkd. as described in the official record.
- At the cor. point
- Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
- T21S R20E
 $\frac{1}{2} \frac{S17}{S20}$
 1964
- Bury original stone cor. alongside iron post, and raise a mound of stone, 2½ ft. base, 1½ ft. high, N. of cor.
-
- N. 89° 50' W., beginning new measurement.
- Continue over gently rolling desert land.

Dependent Resurvey of the Subdivision, T. 21 S., R. 20 E.

CHAINS

- 4.90 Wash, 80 lks. wide, 6 ft. deep, drains S.
 9.20 Wash, 30 lks. wide, 5 ft. deep, drains S.
 23.00 Wash, 2.00 chs. wide, 10 ft. deep, drains S.
 25.65 Trail road, bears irregularly N. and S.
 39.93 The cor. of secs. 17, 18, 19 and 20.

Land, gently rolling desert.
 Soil, rocky clay.
 No timber.
 Undergrowth, shadscale.

S. $89^{\circ} 59'$ W., bet. secs. 18 and 19.

Over gently rolling desert land through shadscale undergrowth.

- 24.90 Wash, 20 lks. wide, 3 ft. deep, drains S.
 40.04 Point for the $\frac{1}{4}$ sec. cor. of secs. 18 and 19 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

T21S R20E

$\frac{1}{4}$ $\frac{S18}{S19}$

1964

Continue over gently rolling desert land.

- 53.70 Wash, 1.00 ch. wide, 5 ft. deep, drains S.
 56.00 Trail road, bears NE. and SW.
 72.00 Wash, 1.50 chs. wide, 12 ft. deep, drains SW.
 75.60 Wash, 15 lks. wide, 8 ft. deep, drains S. 20° W.
 79.75 The cor. of secs. 18 and 19, on the W. bdy. of the Tp., monumented with a sandstone, $18 \times 18 \times 14$ ins., set and mkd. as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T21S
 R19E R20E

S24 $\frac{S18}{S19}$

1964

Bury original stone cor. alongside iron post.

Dependent Resurvey of the Subdivision, T. 21 S., R. 20 E.

CHAINS


From this cor., the cor. of secs. 13 and 24, T. 21 S., R. 19 E., bears N. 0° 13' W., 5.23 chs. dist., monumented with an iron post, 2 ins. diam., set, mkd. and witnessed as described in the official record.

Land, gently rolling.
Soil, rocky clay.
No timber.
Undergrowth, shadscale.

The W. ½ sec. cor. of sec. 19, on the W. bdy. of the Tp., monumented with a sandstone, 16x6x4 ins., set and mkd. as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with glass at base, and in a collar of stone, with brass cap mkd.



Bury original stone cor. alongside iron post.

From this cor., the E. ½ sec. cor. of sec. 24, T. 21 S., R. 19 E., bears N. 0° 11' E., 5.27 chs. dist., monumented with an iron post, 1 in. diam., set, mkd. and witnessed as described in the official record.

From the cor. of secs. 17, 18, 19 and 20.
N. 0° 03' E., bet. secs. 17 and 18.

Over rolling desert land through shadscale undergrowth.
Asc. 65 ft. over S. slope.

15.00 Trail road, bears irregularly NE. and SW.


31.00 Base of spur, bears NE. and SW.; asc. 100 ft. over SE. slope.

38.50 Spur, slopes SW.; desc. 35 ft. over NW. slope.

40.06 The ½ sec. cor. of secs. 17 and 18, monumented with a flint stone, 20x12x5 ins., set and mkd. as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.



Bury original stone cor. alongside iron post.

Dependent Resurvey of the Subdivision, T. 21 S., R. 20 E.

CHAINS

- N. $0^{\circ} 03'$ E., beginning new measurement.
 Desc. 35 ft. over NW. slope.
 7.90 Bottom of descent; asc. 30 ft. over SW. slope.
 22.00 Top of ascent, bears NW. and SE.; desc. 10 ft. along E. slope.
 29.20 Wash, in Blaze Canyon, drains S. 30° E.; asc. 20 ft. over SE. slope.
 34.60 Same wash, in Blaze Canyon, drains S. 20° W.
 40.11 The cor. of secs. 7, 8, 17 and 18, monumented with a sandstone, 12x12x4 ins., set and mkd. as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T21S R20E

$\frac{S7 S8}{S18 S17}$

1964

Bury original stone cor. alongside iron post, and raise a mound of stone, $2\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

Land, rolling desert.

Soil, rocky clay.

No timber.

Undergrowth, shadscale.

From the cor. of secs. 8, 9, 16 and 17.

N. $89^{\circ} 57'$ W., bet. secs. 8 and 17.

Over rolling mesa land through dense pinon and juniper timber. By triangulation along N. slope.

- 2.00 Draw, drains NW.
 22.00 Draw, drains NW.; asc. about 80 ft. over NE. slope.
 35.30 End triangulation on spur, slopes N.; desc. 10 ft. over W. slope.
 39.78 The $\frac{1}{2}$ sec. cor. of secs. 8 and 17, monumented with a sandstone, 18x10x3 ins., set and mkd. as described in the official record. Original bearing trees were not found.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T21S R20E

$\frac{\frac{1}{2} S8}{S17}$

1964

Dependent Resurvey of the Subdivision, T. 21 S., R. 20 E.

CHAINS

Bury original stone cor. alongside iron post.

N. 89° 59' W., beginning new measurement.

By triangulation; desc. about 40 ft. over gentle W. slope.

- 8.00 Rim of mesa, top of ledge, about 300 ft. high, bears N. and S.; desc. abruptly about 760 ft. over ledgy and broken W. slope. Leave timber.
- 37.00 Draw, in bottom of Blaze Canyon, drains SW. from NW.; asc. about 20 ft. over SE. slope.
- 40.03 The cor. of secs. 7, 8, 17 and 18.

Land, rolling mesa E. portion; broken W. portion.
Soil, rocky clay.
Timber, dense pinon and juniper on mesa.
Undergrowth, scattered sagebrush and shadscale.

N. 89° 50' W., bet. secs. 7 and 18.

Over broken land through scattered sagebrush and shadscale undergrowth. By triangulation; asc. about 80 ft. over SE. slope.

- 14.00 Base of mesa, bears N. and curves W.; asc. abruptly about 500 ft. over broken and ledgy E. slope.
- 27.90 End triangulation at top of ledge, rim of mesa, bears N. and curves W.; thence over broken mesa. Enter dense pinon and juniper timber.
- 40.22 The $\frac{1}{2}$ sec. cor. of secs. 7 and 18, monumented with a sandstone, 14x8x6 ins., set and mkd. as described in the official record. Original bearing trees were not found.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. diam., on solid rock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T21S R20E

$\frac{1}{2}$ S7
S18
1964

Bury original stone cor. in mound of stone, alongside iron post.

S. 89° 38' W., beginning new measurement.

By triangulation, continue over broken mesa through dense timber.

- 3.50 Top of ledge, about 300 ft. high, bears NW. and SE.; desc. abruptly about 600 ft. over broken and ledgy SW. slope.

Dependent Resurvey of the Subdivision, T. 21 S., R. 20 E.

CHAINS

- 26.00 Ledy draw, drains S. 20° E.; asc. about 600 ft. over broken and ledgy NE. slope.
- 39.82 Intersect the W. bdy. of the Tp., at true point for the cor. of secs. 7 and 18, from which, the witness cor. of secs. 7 and 18, bears S. 0° 10' W., 9.80 chs. dist., monumented with an iron post, 2 ins. diam., set, mkd. and witnessed as described in the official record.
- From the true point for the cor. of secs. 7 and 18, the cor. of secs. 12 and 13, T. 21 S., R. 19 E., bears N. 0° 10' E., 5.07 chs. dist., monumented with an iron post, 2 ins. diam., set, mkd. and witnessed as described in the official record.
- Land, broken mesa of Book Cliffs.
Soil, mostly exposed sandstone.
Timber, dense pinon and juniper on mesa.
Undergrowth, scattered sagebrush and shadscale.
-
- The W. $\frac{1}{2}$ sec. cor. of sec. 18, on the W. bdy. of the Tp., monumented with a sandstone, 16x10x8 ins., set and mkd. as described in the official record.
- At the cor. point
- Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 8 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.
- | | | | |
|------|--|---------------|--|
| | | T21S | |
| R19E | | R20E | |
| | | $\frac{1}{2}$ | |
| | | S18 | |
| | | 1964 | |
- Bury original stone cor. alongside iron post.
- From this cor., the E. $\frac{1}{2}$ sec. cor. of sec. 13, T. 21 S., R. 19 E., bears N. 0° 10' E., 5.23 chs. dist., monumented with an iron post, 1 in. diam., set, mkd. and witnessed as described in the official record.
-
- From the cor. of secs. 7, 8, 17 and 18.
- N. 0° 03' W., bet. secs. 7 and 8.
- Over rolling land along canyon bottom, through shadscale undergrowth. Desc. 20 ft. over NE. slope.
- 0.20 Wash, in bottom of Blaze Canyon, drains SE. from NW.; asc. 170 ft. over rolling SW. slope.
- 40.10 Point for the $\frac{1}{2}$ sec. cor. of secs. 7 and 8 at proportionate dist.; there is no remaining evidence of the original cor.
- Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 20 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

Dependent Resurvey of the Subdivision, T. 21 S., R. 20 E.

CHAINS

T21S R20E

$$\frac{1}{2}$$

S7	S8
----	----

1964

Cor. set on rocky spur, slopes W.

By triangulation, desc. about 80 ft. along broken W. slope.

53.00 Draw, drains SW.; asc. about 500 ft. over broken and ledgy SE. slope.

64.20 Rim of mesa, bears NE. and SW. End triangulation. Desc. 25 ft. over gentle NW. slope. Enter dense pinon and juniper timber.

80.20 The cor. of secs. 5, 6, 7 and 8, monumented with a sandstone, 14x14x2 ins., set and mkd. as described in the official record. Original bearing trees were not found.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T21S R20E

S6	S5
S7	S8

1964

Bury original stone cor. alongside iron post.

Cor. located 3 lks. S. of fence cor., with fence bearing W. and N. 12° E.

Land, rolling canyon bottom S. portion; broken N. portion.

Soil, rocky clay.

Timber, dense pinon and juniper N. portion.

Undergrowth, shadscale and sagebrush.

From the cor. of secs. 4, 5, 8 and 9.

S. 89° 52' W., bet. secs. 5 and 8.

Over rolling mesa through dense pinon and juniper timber. Asc. 20 ft. over NE. slope.

26.70 Trail road, bears NE. and SW.

36.00 Top of ascent, bears NE. and SW.; desc. 35 ft. over NW. slope.

39.35 Wash, 50 lks. wide, 10 ft. deep, drains SW.; asc. 10 ft. over SE. slope.

Dependent Resurvey of the Subdivision, T. 21 S., R. 20 E.

CHAINS

- 40.21 The $\frac{1}{4}$ sec. cor. of secs. 5 and 8, monumented with a flint stone, 14x12x3 ins., set and mkd. as described in the official record.
- At the cor. point
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.
- T21S R20E
- $\frac{1}{4}$ $\frac{S5}{S8}$
- 1964
- Bury original stone cor. alongside iron post, and raise a mound of stone; $2\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, N. of cor.
-
- N. $89^{\circ} 49'$ W., beginning new measurement.
- Continue over rolling mesa.
- 1.30 Wash, 20 lks. wide, 8 ft. deep, drains SW.
- 5.50 Wash, 30 lks. wide, 5 ft. deep, drains S.; asc. 30 ft. over SE. slope.
- 8.60 Spur, slopes SW.; desc. 80 ft. over NW. slope.
- 11.80 Trail road, bears NW. and S.
- 13.45 Wash, 10 lks. wide, 3 ft. deep, drains SE.; asc. 30 ft. over NE. slope.
- 28.40 Top of low ledge, bears N. and S.; desc. 20 ft. over gentle NW. slope.
- 39.60 The cor. of secs. 5, 6, 7 and 8.
- Land, rolling mesa.
Soil, rocky.
Timber, dense pinon and juniper.
Undergrowth, scattered sagebrush.
-
- Reestablishment of the Retracement Executed
by R. Gentry in 1915
-
- From the cor. of secs. 5, 6, 7 and 8.
- S. $89^{\circ} 55'$ W., bet. secs. 6 and 7.
- Over broken mesa through dense pinon and juniper timber. By triangulation; desc. about 40 ft. over gentle NW. slope, and along S. side of fence bearing W.
- 7.00 Rim of mesa, bears N. and S.; end of fence line; desc. about 350 ft. over broken and ledgy W. slope.
- 15.50 Bottom of Blaze Canyon, drains S.; asc. about 350 ft. over broken and ledgy E. slope.

Dependent Resurvey of the Subdivision, T. 21 S., R. 20 E.

CHAINS

- 22.00 Rim of mesa, bears N. and S. Beginning of fence, bears W., thence along fence line, over gently rolling land.
- 32.00 Trail road, bears N. and S.
- 37.85 Rim of gulch; desc. 30 ft. over NW. slope. End triangulation.
- 39.20 Gulch, drains NE.; asc. 30 ft. over SE. slope.
- 40.03 The $\frac{1}{4}$ sec. cor. of secs. 6 and 7, monumented with a sandstone, 18x10x5 ins., set and mkd., as described in the official record.
- At the cor. point
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 16 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.
- T21S R20E
- $\frac{1}{4}$ $\frac{S6}{S7}$
- 1964
- Bury original stone cor. alongside iron post.
-
- S. 89° 57' W., beginning new measurement.
- By triangulation; asc. about 800 ft. over steep and broken NE. slope.
- 38.10 Ledgy spur, slopes SE. End triangulation; desc. 30 ft. over SW. slope.
- 39.86 Intersect the W. bdy. of the Tp. at the true point for the cor. of secs. 6 and 7, from which the witness cor. of secs. 6 and 7, bears North, 0.41 chs. dist., monumented with an iron post, 2 ins. diam., set, mkd. and witnessed as described in the official record.
- From the true point for the cor. of secs. 6 and 7, the true point for the cor. of secs. 1 and 12, T. 21 S., R. 19 E., bears North, 5.06 chs. dist., and is witnessed by a 2 in. iron post set, mkd. and witnessed as described in the official record.
- Land, broken and rolling mesa.
Soil, rocky.
Timber, dense pinon and juniper.
Undergrowth, scattered sagebrush.
-
- The W. $\frac{1}{4}$ sec. cor. of sec. 7, on the W. bdy. of the Tp., monumented with a sandstone, 8x8x6 ins., set and mkd. as described in the official record.
- At the cor. point
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

Dependent Resurvey of the Subdivision, T. 21 S., R. 20 E.

CHAINS

T21S
R19E | R20E
 | ½
 | S7

1964

Bury original stone cor. alongside iron post, and raise a mound of stone, 3 ft. base, 2 ft. high, E. of cor.

From this cor., the E. ½ sec. cor. of sec. 12, T. 21 S., R. 19 E., bears North, 4.91 chs. dist., monumented with an iron post, 1 in. diam., set, mkd. and witnessed as described in the official record.

From the cor. of secs. 5, 6, 7 and 8.

N. 0° 01' E., bet. secs. 5 and 6.

Over broken and rolling mesa land through scattered pinon and juniper timber. By triangulation; desc. about 80 ft. over NW. slope.

- 0.03 Fence cor., fence bears W. and N. 12° E.
10.00 Draw, drains W. from NE.; asc. about 500 ft. over broken SE. slope.
15.00 Trail road, bears E. and W.
29.80 Spur, slopes SW.; desc. about 200 ft. over NW. slope.
39.76 Point for the ½ sec. cor. of secs. 5 and 6 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

T21S R20E

 | ½
 | S6 | S5

1964

Continue by triangulation. Desc. about 100 ft. over NW. slope.

- 43.00 Draw, drains W.; asc. about 120 ft. over S. slope.

- 48.50 The closing cor. of secs. 5 and 6, on the N. bdy. of the Tp., (Fourth Standard Parallel South) monumented with a sandstone, 16x12x5 ins., set and mkd. as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., on solid rock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T20S

S32

S6 | S5

C C

T21S R20E

1964

Dependent Resurvey of the Subdivision, T. 21 S., R. 20 E.

CHAINS

Bury original stone cor. in mound of stone alongside iron post.

From this cor., the standard cor. of secs. 31 and 32, T. 20 S., R. 20 E., bears S. 89° 58' W., 6.20 chs. dist. a sandstone 10x10x6 ins., set and mkd. as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to solid rock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T20S R20E

SC

S31 | S32

S6

T21S

1964

Bury original cor. stone in a mound of stone alongside iron post.

Land, broken and rolling mesa.

Soil, rocky.

Timber, scattered pinon and juniper.

Undergrowth, sagebrush.

Point for the N. ¼ sec. cor. of sec. 5, on the N. bdy. of the Tp., and midpoint bet. the closing cor. of secs. 5 and 6, and the closing cor. of secs. 4 and 5.

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T20S

¼ S5

T21S R20E

1964

From this cor., the standard ¼ sec. cor. of sec. 32, T. 20 S., R. 20 E., bears S. 89° 58' W., 6.03 chs. dist., monumented with a sandstone, 16x8x4 ins., set and mkd. as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., on solid rock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

SC

T20S R20E

¼ S32

1964

Bury original stone cor. in mound of stone alongside iron post.

Dependent Resurvey of the Subdivision, T. 21 S., R. 20 E.

CHAINS

Point for the N. $\frac{1}{4}$ sec. cor. of sec. 6, on the N. bdy. of the Tp., at proportionate dist. bet. the closing cor. of secs. 5 and 6, and the closing cor. of Tp. 21 S., Rs. 19 and 20 E., falls on near vertical ledge and cannot be perpetuated.

Point selected for the witness N. $\frac{1}{4}$ sec. cor. of sec. 6, bears West, 1.34 chs. dist.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., on solid rock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T20S

WC $\frac{1}{4}$ S6

T21S R20E

1964

Cor. set 15 lks. E. of ledge, 100 ft. high, facing E.

From the true point for the N. $\frac{1}{4}$ sec. cor. of sec. 6, the standard $\frac{1}{4}$ sec. cor. of sec. 31, T. 20 S., R. 20 E., bears West, 6.21 chs. dist., monumented with an iron post, 1 in. diam., set, mkd. and witnessed as described in the official record.

General Description


The northern portion of Township 21 South, Range 20 East is broken and ledgy mesa land of the Book Cliffs, covered with a scattered to dense growth of pinon and juniper timber and sagebrush undergrowth. The southern portion is rolling desert land covered with shadscale undergrowth and no timber. The town of Thompson is located in the central portion of section 21. The area is drained in a southerly direction to Thompson, thence in southerly and southeasterly directions by numerous washes. The soil is mostly clay in the southern portion and rocky clay in the northern portion. The Denver and Rio Grande Western Railroad and U. S. Highway 50 and 6, enter the township on the east boundary of section 25 and bear northwest through the township to Thompson, thence southwest, leaving the township at the southwest corner of section 19 and the northwest corner of section 30. There are several trail roads throughout the southern portion of the township and one along the mesa in the northern portion. The elevation varies from 4,900 ft. above sea level in the southeast corner to 6,150 ft. above sea level in the Book Cliffs in the northern portion. The only water noted in the township was two small ponds or reservoirs near the town of Thompson.

CERTIFICATE OF SURVEY

I, **Gerald W. Hochstrasser**, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 21st day of September, 1962, I have dependently resurveyed a portion of the South boundary of T. 20 S., R. 20 E. (Fourth Standard Parallel South), the South boundary, the subdivisinal lines and retraced a portion of the North boundary, of Township 21 South, Range 20 East.

of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

May 9, 1966
(Date)

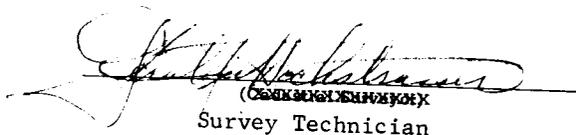
(Cadastral Surveyor)
Survey Technician

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL


SUBMITTED FOR APPROVAL
Date JUN 17 1966

BUREAU OF LAND MANAGEMENT,
Washington, D. C.

The foregoing field notes of the dependent resurvey of a portion of the South boundary of T. 20 S., R. 20 E. (Fourth Standard Parallel South), the South boundary, the subdivisinal lines and the retracement of a portion of the North boundary of Township 21 South, Range 20 East., S. L. Mer., Utah,

executed by **Gerald W. Hochstrasser**, Survey Technician having been critically examined and found correct, are hereby approved.

AUG 5 1966
(Date)

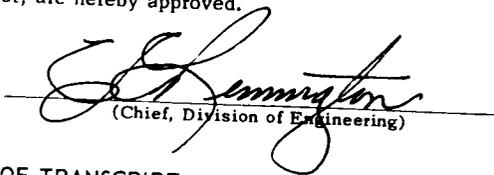
(Chief, Division of Engineering)

CERTIFICATE OF TRANSCRIPT

is a true copy of the original field notes.

(Date)

(Date)

Blank

Page

Blank

Page

FIELD NOTES

SEP 2 1966

OF THE
DEPENDENT RESURVEY

RECEIVED
STATE & LAND OFFICE
SALT LAKE CITY, UTAH

OF

THE EAST BOUNDARY

(GRAND RIVER GUIDE MERIDIAN)

AND

THE SUBDIVISIONAL LINES

OF

TOWNSHIP 21 SOUTH, RANGE 23 EAST

Of the SALT LAKE Meridian,

In the State of UTAH

EXECUTED BY

GLEN B. HATCH

SUPERVISORY CADASTRAL SURVEYOR

Under special instructions dated SEPTEMBER 21, 19 62, which provided for the surveys

included under Group Number 459, approved OCTOBER 1, 1962,

and assignment instructions dated AUGUST 14, 19 63.

Survey commenced May 20, 19 64

Survey completed JUNE 16, 19 64

INDEX DIAGRAM

Township 21 SOUTH, Range 23 EAST,

6	55 8	42 4	34 8	24 2	15 1 6
54	54	42	33	24	15
7	53 8	41 9	32 10	23 11	14 12 5
52	52	40	31	22	13
18	51 17	39 16	30 15	21 14	12 13 4
50	49	39	29	21	12
19	48 20	38 21	29 22	20 23	10 24 3
48	47	37	28	19	10
30	46 29	36 28	27 27	18 26	9 25 3
45	44	36	26	17	8
31	43 32	35 33	25 34	16 35	7 36 2

Township 21 South, Range 23 East

CHAINS

The North boundary (Fourth Standard Parallel South) was surveyed by A. D. Ferron in 1884, and resurveyed by H. D. Heist in 1903 and J. C. Clark in 1923, and the record appears in the field notes of Township 20 South, Range 23 East. The East boundary (Grand River Guide Meridian) was surveyed by E. Buettner in 1880, and was retraced by A. D. Ferron in 1884 and resurveyed by H. D. Page in 1902, and the record appears in the field notes of Township 21 South, Range 24 East. The South boundary was surveyed by A. D. Ferron in 1884, and resurveyed by H. D. Heist in 1903, and retraced by Howard W. Miller in 1911, and the record appears in the field notes of Township 22 South, Range 23 East. The West boundary was surveyed by A. D. Ferron in 1884 and resurveyed by H. D. Heist in 1903 and by Robert C. Yundt in 1936, and the record appears in the field notes of Township 21 South, Range 23 East. The subdivisional lines were surveyed by H. D. Heist in 1903, and the record appears in the field notes of Township 21 South, Range 23 East.

The following field notes are those of the dependent resurvey of the East boundary (Grand River Guide Meridian) and the subdivisional lines of Township 21 South, Range 23 East.

Before restoring the corners, the lines of the original survey were retraced and diligent search made for any evidence of the original corner or other calls of the original field note record.

The rules of proportionate measurement were applied to ascertain the position of the lost corners, but not until exhausting every reasonable possibility of finding direct evidence for the control of each particular corner.

The survey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1947, and special instructions dated September 21, 1962.

All lines of this survey were run by direct method, and distances were determined by chaining.

The direction of the lines of this survey were determined by reference to true meridians established on line by altitude observations on the sun. The lines were carried forward by sustained angulation being supplemented by other altitude observations on the sun taken throughout the progress of the survey.

The geographic position for the southeast corner of the township is at latitude $38^{\circ}55'44.1''$ North, and longitude $109^{\circ}18'46.5''$ West, as determined from section line ties to U.S.C. & G.S. triangulation Station "Cisco", at latitude $38^{\circ}57'33.828''$ N and longitude $109^{\circ}18'08.106''$ W, located N. $46^{\circ}26'$ E., 11.41 chs. dist. from the $\frac{1}{4}$ section corner of sections 19 and 30, Township 21 South, Range 24 East, and U.S.C. & G.S., G.L.O. station "6", at latitude $39^{\circ}00'57.614''$ N. and longitude $109^{\circ}18'45.917''$ W, which is common with the standard cor. of Tps 20 and 21 S., Rs. 23 and 24 E.

The magnetic declination was read at several stations throughout the township and the average of these readings was found to be 15° East.

Dependent Resurvey of the E. Bdy
(Grand River Guide Meridian), T. 21 S., R. 23 E.

Dependent Resurvey of the E. Bdy. (Grand River Guide Meridian), T. 21 S., R.

CHAINS

Reestablishment of the Resurvey Executed by H. D. Page in 1902.

Beginning at the cor. of T. 21 S., Rs. 23 and 24 E., monumented with an iron post, 3 ins. diam., set, mkd. and witnessed as described in the official record.


N. 0°03' E., bet. secs. 31 and 36.

Over rolling desert land through shadscale and scattered sagebrush undergrowth.

- 7.65 Wash, 5 lks. wide, 3 ft. deep, drains E.
- 11.95 Spur, slopes NE.; desc. 50 ft. over NW. slope.
- 27.75 Draw, drains NE.; asc. 20 ft. over SE. slope.
- 36.95 Low spur, slopes NE.; desc. 10 ft. over NE. slope.
- 39.94 The 1/2 sec. cor. of secs. 31 and 36, monumented with a sandstone, 9x6x4 ins., firmly set and plainly mkd. 1/2 on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 18 ins. in the ground, and in a collar of stone to top, with brass cap mkd.




Bury original stone cor. alongside iron post.

North, beginning new measurement.

- 6.45 Right bank of wash, 10 ft. high, bears E. and W.; wash drains E.
- 15.23 Left bank of same wash, 10 ft. high, bears E. and W.
- 27.65 Right bank of Cisco Wash, 15 ft. high, bears NW. and SE.
- 31.65 Cisco Wash, with stream of water, 6 lks. wide, 1 in. deep, flows irregularly SE.
- 34.15 Left bank of same wash, 10 ft. high, bears NW. and SE.; asc. 10 ft. over gentle SE. slope.
- 40.13 The cor. of secs. 25, 30, 31 and 36, monumented with a sandstone, 10x8x6 ins., firmly set and plainly mkd. 1 notch on S. and 5 on N. edges.

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.



Bury original stone cor. alongside iron post.

Independent Resurvey of the E. Bdy. (Grand River Guide Meridian), T. 21 S., R. 23 E.

CHAINS	
	<p>Land, rolling desert. Soil, clay. Undergrowth, sagebrush and shadscale, with willows and greasewood along Cisco Wash.</p>
	<p>N. 0°11' E. bet. secs. 25 and 30.</p> <p>Over rolling desert land through shadscale undergrowth. Asc. 30 ft. over gently rolling SE. slope.</p>
8.40	<p>Wash, 20 lks. wide, 1 ft. deep, drains SE.; continue ascent over SE. slope.</p>
40.12	<p>The ½ sec. cor. of secs. 25 and 30, monumented with a sandstone, 16x10x6 ins., firmly set and plainly mkd. ½ on W. face.</p> <p>At the cor. point</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone to top, with brass cap mkd.</p> <div style="text-align: center;"> <p>T21S R23E R24E ½ S25 S30 1964</p> </div> <p>Bury original stone cor. alongside iron post.</p>
	<p>N. 0°05' E., beginning new measurement.</p> <p>Asc. 25 ft. over gentle SE. slope.</p>
28.15	<p>Base of spur, bears SW. and NE.; asc. 80 ft. over SE. slope.</p>
36.05	<p>Spur, slopes SW.; desc. 10 ft. over gentle NW. slope.</p>
40.07	<p>The cor. of secs. 19, 24, 25 and 30, monumented with a shale stone, 9x8x5 ins., firmly set and dimly mkd. with 2 notches on S. and 4 on N. edges.</p> <p>At the cor. point</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone to top, with brass cap mkd.</p> <div style="text-align: center;"> <p>T21S R23E R24E S24 S19 S25 S30 1964</p> </div> <p>Bury original stone cor. alongside iron post.</p>
	<p>Land, rolling desert. Soil, rocky clay. Undergrowth, shadscale.</p>
	<p>N. 0°04' E., bet. secs. 19 and 24.</p> <p>Over rolling desert land through shadscale undergrowth. Desc. 35 ft. over gentle NW. slope.</p>
14.65	<p>Wash, 15 lks. wide, 1½ ft. deep, drains NW.; continue descent over gentle NW. slope.</p>
21.00	<p>Wash, 20 lks. wide, 5 ft. deep, drains NE.; asc. 30 ft. over gentle SE. slope.</p>
31.40	<p>Low ridge, bears NE. and SW.; desc. 10 ft. over gentle NW. slope.</p>

CHAINS	
34.00	El Paso underground natural gas line, bears N. 44°53' E. and S. 44°53' W.
40.15	The ½ sec. cor. of secs. 19 and 24, monumented with a sandstone, 10x8x6 ins., firmly set and dimly mkd. ¼ on W. face.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, with glass at base, and in a collar of stone, with brass cap mkd.
	<p style="text-align: center;">T21S R23E R24E ¼ S24 S19 1964</p>
	Bury original stone cor. alongside iron post.
	N. 0°07' E., beginning new measurement.
	Continue over gently rolling desert land.
9.05	Improved gravel road to Cisco, bears N. 70° W. and S. 70° E.
12.23	Transmission line, 4 wire, bears N. 71°45' W. and S. 71°45' E.
20.01	Cor. of fence bears W. 7 lks. dist., with fence bearing N. and W.
34.53	Cor. of fence bears W. 5 lks. dist., with fence bearing S. and S. 81°27' W.
35.30	Center of U. S. Highway 50 and 6, bears S. 81°25' W. and N. 81°25' E.
40.04	Point for the cor. of secs. 13, 18, 19 and 24, at proportionate dist.; there is no remaining evidence of the original cor.
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with glass at base, and brass cap mkd.
	<p style="text-align: center;">T21S R23E R24E <u>S13 S18</u> S24 S19 1964</p>
	Raise a mound of stone, 3 ft. base, 2 ft. high W. of cor.
	Land, gently rolling desert.
	Soil, clay.
	Undergrowth, shadscale.
	N. 0°07' E., bet. secs. 13 and 18.
	Over gently rolling desert land through shadscale undergrowth.
1.04	Main track of Denver and Rio Grande Western Railroad, bears N. 72°52' E. and S. 72°52' W.
1.24	Side track of railroad, parallel to main track.
1.79	Telephone line, 24 wire, parallel to railroad.
2.45	Railroad maintenance road, parallel to railroad.
40.04	Point for the ½ sec. cor. of secs. 13 and 18 at proportionate dist.; there is no remaining evidence of the original cor.

endent Resurvey of the E. Bdy. (Grand River Guide Meridian), T. 21 S., R. 23 E.

CHAINS	
	<p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with glass at base, and brass cap mkd.</p> <p style="text-align: center;">T21S R23E R24E ½ S13 S18 1964</p> <p>Raise a mound of stone, 2 ft. base, 2 ft. high, W. of cor. Asc. 30 ft. over gentle S. slope.</p>
59.85	Low ridge, bears E. and W.; desc. 10 ft. over gentle NE. slope.
65.75	Wash, 15 lks. wide, 2 ft. deep, drains NE.
80.08	Point for the cor. of secs. 7, 12, 13 and 18 at proportionate dist.; there is no remaining evidence of the original cor.
	<p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with glass at base, and brass cap mkd.</p> <p style="text-align: center;">T21S R23E R24E S12 S7 S13 S18 1964</p> <p>Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor. Land, gently rolling desert. Soil, clay. Undergrowth, shadscale.</p>
	<p>N. 0°07' E., bet. secs. 7 and 12.</p> <p>Over rolling desert land through shadscale undergrowth. Desc. 20 ft. over gentle N. slope.</p>
15.75	Wash, 15 lks. wide, 5 ft. deep, drains E.
17.15	Wash, 10 lks. wide, 6 ft. deep, drains E.
19.25	Wash, 1.00 ch. wide, 10 ft. deep, drains E.; asc. 25 ft. over gently rolling SE. slope.
33.65	Wash, 15 lks. wide, 2 ft. deep, drains S. 60° E.
40.04	Point for the ¼ sec. cor. of secs. 7 and 12 at proportionate dist.; there is no remaining evidence of the original cor.
	<p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with glass at base, and in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T21S R23E R24E ½ S12 S7 1964</p> <p>Asc. 45 ft. over gently rolling SE. slope.</p>
62.75	Small spur, slopes NE.
78.65	Wash, 10 lks. wide, 1 ft. deep, drains S. 70° E.
80.08	Point for the cor. of secs. 1, 6, 7 and 12 at proportionate dist.; there is no remaining evidence of the original cor.

Dependent Resurvey of the E. Bdy.-(Grand River Guide Meridian), T. 21 S., R. 23 E.

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with glass at base, and in a collar of stone, with brass cap mkd.

T21S
R23E R24E
S1|S6
S12|S7

1964

Land, gently rolling desert.
Soil, clay.
Undergrowth, shadscale.

N. 0°07' E., bet. secs. 1 and 6.

Over gently rolling desert land through shadscale undergrowth. Asc. 55 ft. over gently rolling SE. slope.

- 6.15 Wash, 10 lks. wide, 2 ft. deep, drains SE.
- 9.15 Wash, 10 lks. wide, 2 ft. deep, drains SE.
- 16.95 Wash, 20 lks. wide, 2 ft. deep, drains SE.
- 27.20 Trail road, on low ridge, bears NE. and SW.; desc. 15 ft. over gentle NW. slope.
- 40.04 Point for the ¼ sec. cor. of secs. 1 and 6 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with glass at base, and in a collar of stone, with brass cap mkd.

T21S
R23E R24E
½
S1|S6

1964

Desc. 10 ft. over gentle NW. slope.

- 48.25 Junction of washes, from SW. and W., drains N. 65° E.; asc. 30 ft. over S. slope.
- 56.85 Top of clay knoll; desc. 15 ft. over rolling land.
- 64.85 Trail road, bears NE. and SW.
- 76.00 Small spur, slopes NE.
- 80.08 The standard cor. of Tps. 20 and 21 S., Rs. 23 and 24 E., monumented with a brass tablet, set in concrete post, 14x14x4 ins. above ground, mkd. as described in the 1964 field notes of T. 21 S., R. 24 E. This cor. is also known as U.S.C. & G.S., G.L.O. Station 6, Utah.

Land, gently rolling desert.
Soil, clay.
Undergrowth, shadscale.

Dependent Resurvey of the Subdivision, T. 21 S., R. 23 E.

Reestablishment of the Survey Executed by H. D. Heist in
1903.

Dependent Resurvey of the Subdivision, T. 21 S., R. 23 E.

CHAINS	
	<p>From the cor. of secs. 35 and 36, on the S. bdy. of the Tp., monumented with an iron post, 3 ins. diam., set, mkd and witnessed as described in the official record.</p> <p>N. 0°15' E., bet. secs. 35 and 36.</p> <p>Over rolling desert land through shadscale and scattered sagebrush undergrowth. Asc. 35 ft. over gentle SW. slope.</p>
12.65	Trail road, bears irregularly E. and W.
12.85	Spur, slopes W.; desc. 45 ft. over NW. slope.
31.90	Wash, 15 lks. wide, 4 ft. deep, drains N. 70° E.
36.10	Wash, 10 lks. wide, 3 ft. deep, drains E.; asc. 15 ft. over S. slope.
40.12	<p>The $\frac{1}{4}$ sec. cor. of secs. 35 and 36, monumented with a sandstone, 20x14x8 ins., firmly set and plainly mkd. $\frac{1}{4}$ on W. face.</p> <p>At the cor. point</p> <p>Set an iron post, 30 ins. long, 2$\frac{1}{2}$ ins. diam., 24 ins. in the ground, with glass at base, and brass cap mkd.</p> <div style="text-align: center;"> <p>T21S R23E</p> <p>↓</p> <p>S35 S36</p> <p>↓</p> <p>1964</p> </div> <p>Bury original stone cor. alongside iron post, and raise a mound of stone, 3 ft. base, 1$\frac{1}{2}$ ft. high, W. of cor.</p>
	<p>N. 0°02' E., beginning new measurement.</p> <p>Asc. 10 ft. over S. slope.</p>
0.50	Spur, slopes E.; desc. 30 ft. over N. slope.
12.75	Wash, 15 lks. wide, 3 ft. deep, drains E.; asc. 25 ft. over SE. slope.
22.40	Spur, slopes NE.; desc. 55 ft. over NE. slope.
32.40	Wash, 50 lks. wide, 5 ft. deep, drains SE.; asc. 30 ft. over SW. slope.
39.91	<p>The cor. of secs. 25, 26, 35 and 36, monumented with a sandstone, 16x12x8 ins., firmly set and plainly mkd. 1 notch on S. and E. edges.</p> <p>At the cor. point</p> <p>Set an iron post, 30 ins. long, 2$\frac{1}{2}$ ins. diam., 24 ins. in the ground, with glass at base, and brass cap mkd.</p> <div style="text-align: center;"> <p>T21S R23E</p> <p><u>826 825</u></p> <p><u>835 836</u></p> <p>1964</p> </div> <p>Bury original stone cor. alongside iron post, and raise a mound of stone, 3 ft. base, 1$\frac{1}{2}$ ft. high, W. of cor.</p>

CHAINS

Land, rolling desert.
Soil, clay.
Undergrowth, shadscale and scattered sagebrush.

From the cor. of secs. 25, 30, 31 and 36, on the E. bdy. of the Tp.

N. 89°45' W., bet. secs. 25 and 36.

Over rolling desert land through shadscale and scattered sagebrush and greasewood undergrowth.

- 9.00 Left bank of Cisco Wash, 20 ft. high, bears NW. and SE.
- 10.00 Cisco Wash, with stream of water, 3 lks. wide, 6 ins. deep, flows SE.
- 11.30 Right bank of Cisco Wash, 20 ft. high, bears NW. and SE.
- 29.00 Base of spur, bears N. and S.; asc. 55 ft. over E. slope. Leave greasewood.
- 30.90 Top of steep ascent, bears N. and S.; thence over nearly level land.
- 40.10 The $\frac{1}{4}$ sec. cor. of secs. 25 and 36, monumented with a sandstone, 18x12x6 ins., firmly set and plainly mkd. $\frac{1}{4}$ on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with glass at base, and brass cap mkd.

T21S R23E

$\frac{1}{4}$ $\frac{S25}{S36}$

1964

Bury original stone cor. alongside iron post, and raise a mound of stone, 3 ft. base, 1½ ft. high, N. of cor.

Cor. set on spur, slopes NE.

N. 89°27' W., beginning new measurement.

Desc. 20 ft. over NW. slope.

- 8.00 Wash, 15 lks. wide, 2 ft. deep, drains S. 65° E.; asc. 35 ft. over SE. slope.
- 21.80 Spur, slopes SW.; desc. 40 ft. over SW. slope.
- 31.15 Wash, 10 lks. wide, 1 ft. deep, drains S.; asc. 20 ft. over NE. slope.
- 38.65 Spur, slopes S.; desc. 10 ft. over SW. slope.
- 40.14 The cor. of secs. 25, 26, 35 and 36.

Land, rolling desert.
Soil, sandy clay.
Undergrowth, shadscale and sagebrush, with greasewood along Cisco Wash.

Resurvey of the Subdivision, T. 21 S., R. 23 E.

CHAINS

Bury original stone cor. alongside iron post, and raise a mound of stone, 3 ft. base, 1½ ft. high, W. of cor.

Land, rolling desert.

Soil, clay.

Undergrowth, shadscale and sagebrush.

From the cor. of secs. 19, 24, 25 and 30, on the E. bdy. of the Tp.

N. 89°39' W., bet. secs. 24 and 25.

Over rolling desert land through shadscale undergrowth. Desc. 90 ft. over NW. slope.

21.55 Wash, 20 lks. wide, 2 ft. deep, drains S. 25° W.; asc. 55 ft. over SE. slope.

32.70 Spur, slopes SE.; desc. 75 ft. over SW. slope.

33.15 El Paso underground natural gas line, bears N. 44°39' E. and S. 44°39' W.

40.09 The ¼ sec. cor. of secs. 24 and 25, monumented with a limestone, 6x6x6 ins., firmly set, and plainly mkd. ¼ on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with glass at base, and in a collar of stone, with brass cap mkd.

T21S R23E

¼ $\frac{S24}{S25}$

1964

Bury original stone cor. alongside iron post.

N. 89°50' W., beginning new measurement.

Over nearly level land. Enter greasewood.

6.20 Wash, 30 lks. wide, 8 ft. deep, drains S.

28.20 Left bank of Cisco Wash, 8 ft. high, bears N. 20° W. and curves SE. Stream of water, 5 lks. wide, 1 in. deep, in wash, flows SE.

32.10 Right bank of Cisco Wash, bears NW. and SE.; asc. 20 ft. over E. slope.

35.00 Leave greasewood.

40.17 The cor. of secs. 23, 24, 25 and 26.

Land, rolling desert.

Soil, sandy clay.

Undergrowth, shadscale, sagebrush and greasewood.

N. 0°10' E., bet. secs. 23 and 24.

Over nearly level desert land through shadscale, sagebrush and greasewood undergrowth. Desc. 15 ft. over gentle NE. slope.

Dependent Resurvey of the Subdivision, T. 21 S., R. 23 E.

CHAINS 5.00	Base of descent, bears NW. and SE.; thence over level bottom land.
7.10	Wash, 20 lks. wide, 4 ft. deep, drains SE.
22.00	Right bank of Cisco Wash, 20 ft. deep, with stream of water, 6 lks. wide, 1 in. deep, flows SE.
25.25	Telephone line, 6 wire, bears N. 31° E. and S. 31° W.
25.60	Left bank of Cisco Wash, bears NW. and SE.
26.76	Cor. of fence, with fence bearing W. and N. 0°10' E., thence along fence line.
32.95	Transmission line, 4 wire, bears N. 47°20' E. and S. 47°20' W.
40.05	The ¼ sec. cor. of secs. 23 and 24, at cor. of fence bearing S.0°10' W. and W., monumented with a redwood post, 4x4 ins., 12 ins. long, firmly set, and plainly mkd. ¼ on W. face.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with glass at base, and brass cap mkd.
	T21S R23E ¼ S23 S24 1964
	Bury original redwood cor. alongside iron post, and raise a mound of stone, 3 ft. base, 1½ ft. high, W. of cor.

	N. 0°13' E., beginning new measurement.
	Continue over nearly level land.
10.10	Center of U. S. Highway 50 and 6, on slight turn, bears NE. and SW.; leave greasewood.
12.73	Telephone line, 2 wire, bears E. and W.
15.90	Denver and Rio Grande Western Railroad, bears N. 72°54' E. and S. 72°54' W.
16.65	Telephone line, 24 wire, parallels railroad.
40.05	The cor. of secs. 13, 14, 23 and 24, monumented with a redwood post, 4x4x18 ins., firmly set and plainly mkd. 1 notch on E. and 3 on S. edges, with dim scribe mks. on NE., SE., SW. and NW. faces.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with glass at base, and in a collar of stone with brass cap mkd.
	T21S R23E S14 S13 S23 S24 1964
	Bury original redwood cor. alongside iron post.

Dependent Resurvey of the Subdivision T. 21 S., R. 23 E.

CHAINS

Land, nearly level desert.
Soil, sandy clay.
Undergrowth, shadscale, sagebrush and greasewood.

From the cor. of secs. 13, 18, 19 and 24, on the E. bdy. of the Tp.

N. 89°47' W., bet. secs. 13 and 24.

Over nearly level desert land through shadscale undergrowth.

- 2.82 Denver and Rio Grande Western Railroad, bears N. 72°52' E. and S. 72°52' W.
- 3.50 Side track of railroad, parallels main track.
- 5.25 Telephone line, 24 wire, parallels railroad.
- 8.00 Maintenance road, parallels railroad.
- 27.20 Trail road, bears N. and S.
- 33.20 Trail road, bears NE. and SW.
- 40.03 Point for the $\frac{1}{2}$ sec. cor. of secs. 13 and 24 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with glass at base, and brass cap mkd.

T21S R23E

$\frac{1}{2}$ $\frac{S13}{S24}$

1964

- Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.
- 44.95 Trail road, bears N. 15° W. and S. 15° E.
- 47.15 Railroad siding, bears N. 20° W. and S. 20° E. about 8.00 chs. to end.
- 61.10 Telephone line, 6 wire, bears N. 3°45' E. and S. 3°45' W.
- 80.06 The cor. of secs. 13, 14, 23 and 24.

Land, nearly level desert.
Soil, clay.
Undergrowth, shadscale.

N. 0°01' W., bet. secs. 13 and 14.

Over gently rolling desert land through shadscale undergrowth. Asc. 45 ft. over gentle S. slope.

- 4.60 Trail road, bears E. and W.
- 27.45 Spur, slopes SW.; desc. 10 ft. over gentle NW. slope.
- 40.03 The $\frac{1}{2}$ sec. cor. of secs. 13 and 14, monumented with a redwood post, 4x4x24 ins., firmly set and plainly mkd. $\frac{1}{2}$ on W. face.

Dependent Resurvey of the Subdivision, T. 21 S., R. 23 E.

CHAINS	
	<p>At the cor. point</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with glass at base, and brass cap mkd.</p> <p style="text-align: center;">T21S R23E $\frac{1}{4}$ S14 S13 1964</p> <p>Bury original redwood cor. alongside iron post, and raise a mound of stone, 3 ft. base, 1½ ft. high, W. of cor.</p> <hr style="width: 20%; margin: auto;"/> <p>N. 0°01' W., beginning new measurement.</p> <p>Asc. 70 ft. over gentle S. slope.</p>
33.25	<p>Spur, slopes SW.; asc. 10 ft. over series of small clay spurs sloping SW.</p>
40.09	<p>The cor. of secs. 11, 12, 13 and 14, monumented with a redwood post, 4x4x24 ins., firmly set and mkd. T21SS12 on NE., R23ES13 on SE., S14 on SW. and S11 on NW. faces, with 1 notch on E. and 4 on S. edges.</p> <p>At the cor. point</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with glass at base, and in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T21S R23E $\frac{1}{4}$ S11 S12 S14 S13 1964</p> <p>Bury original redwood cor. alongside iron post.</p> <p>Land, gently rolling desert. Soil, clay. Undergrowth, shadscale.</p>
18.90	<p>From the cor. of secs. 7, 12, 13 and 18, on the E. bdy. of the Tp.</p> <p>N. 89°35' W., bet. secs. 12 and 13.</p> <p>Over rolling desert land through shadscale undergrowth. Asc. 30 ft. over gently rolling land.</p>
35.50	<p>Wash, 10 lks. wide, 2 ft. deep, drains NE.</p>
40.18	<p>The ½ sec. cor. of secs. 12 and 13, monumented with a redwood post, 3x3x24 ins., firmly set and dimly mkd. ½ on N. face.</p> <p>At the cor. point</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, with glass at base, and in a collar of stone, with brass cap mkd.</p>

CHAINS

T21S R23E

$\frac{1}{2}$ S12
 $\frac{1}{4}$ S13

1964

- Bury original redwood cor. alongside iron post.
N. 89°56' W., beginning new measurement.
Asc. 20 ft. over E. slope.
- 12.85 Trail road, on ridge, bears N. 15° W. and S. 15° E.; desc. 10 ft. over SW. slope.
- 15.50 Telephone line, 6 wire, bears N. 4° E. and S. 4° W.
- 39.99 The cor. of secs. 11, 12, 13 and 14.
- Land, gently rolling desert.
Soil, clay.
Undergrowth, shadscale.

North, bet. secs. 11 and 12.

- Over gently rolling desert land through shadscale undergrowth. Asc. 25 ft. over series of small clay spurs sloping SW.
- 13.80 Low ridge, bears NE. and SW.; desc. 15 ft. over series of small clay spurs sloping W.
- 35.80 Abandoned railroad grade, bears NE. and SW.
- 40.01 Point for the $\frac{1}{4}$ sec. cor. of secs. 11 and 12 at proportionate dist.; there is no remaining evidence of the original cor.
- Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with glass at base, and brass cap mkd.

T21S R23E

$\frac{1}{4}$
S11|S12

1964

- Raise a mound of stone, 3 ft. base, 1½ ft. high, W. of cor.
- 40.95 Trail road, on ridge, bears NW. and SE.; desc. 15 ft. over series of small clay spurs sloping E.
- 60.30 End of descent; asc. 25 ft. over S. slope.
- 66.70 Spur, slopes E.; desc. 60 ft. over NE. slope.
- 80.02 Point for the cor. of secs. 1, 2, 11 and 12 at proportionate dist. falls in wash, 1.00 chs. wide, 10 ft. deep, drains SE., and is not monumented. There is no remaining evidence of the original cor.
- Point selected for the witness cor. of secs. 1, 2, 11 and 12, bears N. 89°51' W. 0.90 chs. dist.
- Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with glass at base, and brass cap mkd.

Dependent Resurvey of the Subdivision, T. 21 S., R. 23 E.

CHAINS	
	<p>T21S R23E</p> $\begin{array}{c} \frac{S2 S1}{S11 S12} \rightarrow \begin{array}{l} W \\ C \end{array} \end{array}$ <p>1964</p> <p>No accessories available.</p> <p>Land, rolling desert. Soil, clay. Undergrowth, shadscale.</p>
	<p>From the cor. of secs. 1, 6, 7 and 12, on the E. bdy. of the Tp.</p> <p>N. 89°45' W., bet. secs. 1 and 12.</p> <p>Over rolling desert land through shadscale undergrowth.</p>
36.35	Wash, 10 lks. wide, 2 ft. deep, drains S.
40.11	Point for the ¼ sec. cor. of secs. 1 and 12 at proportionate dist.; there is no remaining evidence of the original cor.
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with glass at base, and brass cap mkd.
	<p>T21S R23E</p> $\frac{\frac{1}{4} S1}{S12}$ <p>1964</p>
	Raise a mound of stone, 2 ft. base, 2 ft. high, N. of cor.
42.70	Old railroad grade, bears NE. and SW.
50.22	Telephone line, 6 wire, bears N. 4° E. and S. 4° W.
75.15	Wash, 40 lks wide, 10 ft. deep, drains S.
80.00	Wash, 1.50 chs. wide, 8 ft. deep, drains SE.
80.22	True point for the cor. of secs. 1, 2, 11 and 12.
	Land, gently rolling desert. Soil, clay. Undergrowth, shadscale.
	N. 0°15' W., bet. secs. 1 and 2.
	Over rolling desert land through shadscale undergrowth.
0.50	Wash, 1.50 chs. wide, 8 ft. deep, drains SE.; asc. 45 ft. over gentle SW. slope.
40.01	The ¼ sec. cor. of secs. 1 and 2, monumented with a red-wood post, 4x4x24 ins., firmly set and plainly mkd. ½ on the W. face.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

CHAINS

T21S R23E

$\frac{1}{2}$
S2|S1
1964

Bury original redwood cor. alongside iron post.

N. 0°24' E., beginning new measurement.

Asc. 45 ft. over SW. slope.

16.00 Spur, slopes SW.; desc. 15 ft. over NW. slope.

26.50 Wash, 15 lks. wide, 2 ft. deep, drains SW.; asc. 35 ft. over SE. slope.

36.50 Spur, slopes NE.; desc. 10 ft. over N. slope.

39.76 The standard cor. of secs. 35 and 36, T. 20 S., R. 23 E., on the N. bdy. of the Tp., monumented with an iron post, 2 ins. diam., set and mkd. as described in the official record. This cor. will also function as the cor. of secs. 1 and 2, and, I remark to read

T20S R23E
S C

$\frac{S35}{S2}$ | $\frac{S36}{S1}$

T21S
1964
1923

Land, rolling desert.
Soil, clay.
Undergrowth, shadscale.

The standard $\frac{1}{2}$ sec. cor. of sec. 36, T. 20 S., R. 23 E., on the N. bdy. of the Tp., monumented with an iron post, 1 in. diam., set and mkd. as described in the official record, will also function as the N. $\frac{1}{2}$ sec. cor. of sec. 1, and, I remark to read

T20S R23E
S C

$\frac{1}{2}$ $\frac{S36}{S1}$

T21S
1964
1923

From the cor. of secs. 34 and 35, on the S. bdy. on the Tp., monumented with an iron post, 3 ins. diam., set and mkd. as described in the official record.

N. 0°02' E., bet. secs. 34 and 35.

Over rolling desert land through shadscale undergrowth.
Asc. 20 ft. over SW. slope.

21.60 Low ridge, bears E. and W.; desc. 20 ft. over gentle NE. slope.

From the Res. of the Subdivision. T. 21 S., R. 23 E.

CHAINS

- 33.60 El Paso underground natural gas line, bears N. 45°23' E. and S. 45°23' W.
- 36.50 Trail road, bears NE. and SW.
- 40.07 Point for the $\frac{1}{4}$ sec. cor. of secs. 34 and 35 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with glass at base, and brass cap mkd.

T21S R23E

$\frac{1}{4}$

S34|S35

1964

Raise a mound of stone, 3 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.

Desc. 15 ft. over NE. slope.

- 62.75 Wash, 50 lks. wide, 10 ft. deep, drains S. 80° E.; asc. 30 ft. over S. slope.
- 69.35 Improved gravel road, bears N. 30° W. and S. 30° E.
- 74.45 Low ridge, bears NW. and SE.; desc. 10 ft. over gentle NE. slope.
- 78.94 Transmission line, 4 wire, bears N. 20°50' W. and S. 20°50' E.
- 80.14 The cor. secs. 26, 27, 34 and 35, monumented with a sandstone, 20x12x8 ins., firmly set and plainly mkd. 1 notch on S. and 2 on E. edges.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with glass at base, and brass cap mkd.

T21S R23E

S27|S26
S34|S35

1964

Bury original stone cor. alongside iron post, and raise a mound of stone, 3 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.

Land, rolling desert.

Soil, clay.

Undergrowth, shadscale.

From the cor. of secs. 25, 26, 35 and 36.

N. 89°54' W., bet. secs. 26 and 35.

Over rolling desert land through shadscale undergrowth. Desc. 20 ft. over SW. slope.

- 5.80 Wash, 15 lks. wide, 3 ft. deep, drains S.; asc. 15 ft. over SE. slope.

De endent Reserve of the Subdivision T. 21 S. R. 23 E.

CHAINS

- 33.15 El Paso underground natural gas line, bears N. 45°25' E. and S. 45°25' W.
- 40.08 Point for the 1/4 sec. cor. of secs. 26 and 35 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

T21S R23E

1/4 S26 / S35

1964

Asc. 45 ft. over SE. slope.

- 72.00 Slope changes; asc. 5 ft. over NE. slope.

- 80.16 The cor. of secs. 26, 27, 34 and 35.

Land, rolling desert.
Soil, clay.
Undergrowth, shadscale.

N. 0°12' E., bet. secs. 26 and 27.

Over gently rolling desert land through shadscale undergrowth. Desc. 15 ft. over NE. slope.

- 19.00 Wash, 25 lks. wide, 2 ft. deep, drains SE.; asc. 20 ft. over S. slope.

- 27.78 Telephone line, 6 wire, bears N. 61° 45' E. and S. 61°45' W.

- 39.99 Point for the 1/4 sec. cor. of secs. 26 and 27 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with glass at base, and brass cap mkd.

T21S R23E

1/4

S27 | S26

1964

Raise a mound of stone, 3 ft. base, 1 1/2 ft. high, W. of cor.

Desc. 35 ft. over gently rolling N. slope.

- 43.27 Transmission line, 4 wire, bears N. 49°34' E. and S. 49°34' W.

- 45.20 Center of U. S. Highway 50 and 6, bears N. 49°34' E. and S. 49°34' W.

- 46.20 Fence, parallel to highway.

- 73.80 Denver and Rio Grande Western Railroad, bears N. 31°47' E. and S. 31°47' W.

- 75.08 Telephone line, 24 wire, parallel to railroad.

Dependent Resurvey of the Subdivision, T. 21 S., R. 23 E.

CHAINS
79.98

The cor. of secs. 22, 23, 26 and 27, monumented with a sandstone, 14x8x6 ins., firmly set and plainly mkd. 2 notches on S. and E. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with glass at base, and in a collar of stone, with brass cap mkd.

T21S R23E

S22	S23
S27	S26

1964

Bury original stone cor. alongside iron post, and raise a mound of stone, 3 ft. base, 1½ ft. high, W. of cor.

Land, gently rolling desert.
Soil, clay.
Undergrowth, shadscale.

From the cor. of secs. 23, 24, 25 and 26.

N. 89°57' W., bet. secs. 23 and 26.

Over rolling desert land through shadscale undergrowth. Asc. 40 ft. over steep E. slope.

- 1.60 Spur, slopes NE.; desc. 45 ft. over NW. slope.
- 15.00 Telephone line, 6 wire, bears N. 31° E. and S. 31° W.
- 17.75 Wash, 10 lks. wide, 1 ft. deep, drains NE.; asc. 30 ft. over SE. slope.
- 37.00 Transmission line, 4 wire, bears N. 49°45' E. and S. 49°45' W.
- 39.81 Center of U. S. Highway 50 and 6, bears N. 48°47' E. and S. 48°47' W.
- 40.02 Point for the ¼ sec. cor. of secs. 23 and 26 at proportionate dist. falls in U.S. Hwy. 50-6; there is no remaining evidence of the original cor.

Drive a railroad spike at cor. point

from which

An iron post, 30 ins. long, 2½ ins. diam., set 22 ins. in the ground, and in a collar of stone, for a reference monument, bears S. 45° E., 54 ft. dist., with brass cap mkd. T21S R23E S26 RM 54 FT 1964 and an arrow pointing to the true cor.

An iron post, 30 ins. diam., set 22 ins. in the ground, for a reference monument, bears N. 45° W., 41 ft. dist., with brass cap mkd. T21S R23E S23 RM 41 FT 1964 and an arrow pointing to the true cor.

Asc. 25 ft. over gently rolling SE. slope.
- 40.85 Fence, parallel to highway.
- 55.00 Low ridge, bears NE. and SW.; desc. 25 ft. over gentle NW. slope.

Resurvey of the Subdivision T. 21 S. R. 23 E.

CHAINS

- 76.25 Denver and Rio Grande Western Railroad, bears N. 31°47' and S. 31°47' W.
- 77.09 Telephone line, 24 wire, parallel to railroad.
- 79.85 Wash, 20 lks. wide, 6 ft. deep, drains N.
- 80.04 The cor. of secs. 22, 23, 26 and 27.
Land, gently rolling desert.
Soil, clay.
Undergrowth, shadscale.

N. 0°05' E., bet. secs. 22 and 23.

Over gently rolling desert land through shadscale undergrowth. Desc. 10 ft. over gentle N. slope.

- 8.00 Wash, 40 lks. wide, 5 ft. deep, drains NE.
- 12.70 Wash, 20 lks. wide, 3 ft. deep, drains NE.
- 25.40 Wash, 60 lks. wide, 10 ft. deep, drains S. 75° E.; asc. 10 ft. over gentle SW. slope.
- 40.08 The ¼ sec. cor. of secs. 22 and 23, monumented with a sandstone, 20x12x7 ins., loosely set and plainly mkd. ¼ on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with glass at base, and brass cap mkd.

T21S R23E

¼

S22|S23

1964

Bury original stone cor. alongside iron post, and raise a mound of stone, 3 ft. base, 1½ ft. high, W. of cor.

N. 0°19' E., beginning new measurement.

Asc. 40 ft. over SW. slope.

- 6.70 Spur, slopes SE.; desc. 35 ft. over NW. slope.
- 20.55 Wash, in draw, drains NE.; thence along E. slope.
- 33.40 Desc. 60 ft. over NE. slope.
- 40.22 The cor. of secs. 14, 15, 22 and 23, monumented with a sandstone, 18x10x6 ins., firmly set and mkd. 2 notches on E. and 3 on S. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, with glass at base, and brass cap mkd.

T21S R23E

S15|S14
S22|S23

1964

Dependent Resurvey of the Subdivision, T. 21 S., R. 23 E.

CHAINS	
	<p>Bury original stone cor. alongside iron post, and raise a mound of stone, 3 ft. base, 1½ ft. high, W. of cor.</p> <p>Land, rolling desert. Soil, clay. Undergrowth, shadscale.</p>
	<p>From the cor. of secs. 13, 14, 23 and 24.</p> <p>N. 89°46' W., bet. secs. 14 and 23.</p> <p>Over nearly level desert land through shadscale undergrowth.</p>
17.50	Wash, 10 lks. wide, 3 ft. deep, drains S.
27.80	Wash, 15 lks. wide, 10 ft. deep, drains S.
40.01	<p>The ¼ sec. cor. of secs. 14 and 23, monumented with a redwood post, 4x4x30 ins., firmly set and plainly mkd. ¼ on N. face.</p> <p>At the cor. point</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with glass at base, and in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T21S R23E</p> <p style="text-align: center;"> $\frac{1}{4} \frac{S14}{S23}$ </p> <p style="text-align: center;">1964</p> <p>Bury original redwood cor. alongside iron post.</p> <hr style="width: 20%; margin: auto;"/> <p>N. 89°46' W., beginning new measurement.</p> <p>Over gently rolling desert land.</p>
25.35	Fence, bears about S. 45° E. and N. 45° W. about 8.00 chs., thence N. 15°35' W.
32.50	Cisco Wash, 1.50 chs. wide, 10 ft. deep; with stream of water, 3 lks. wide, 1 in. deep, flows SE.
39.70	Wash, 20 lks. wide, 4 ft. deep, drains S. 60° E.
40.00	<p>The cor. of secs. 14, 15, 22 and 23.</p> <p>Land, nearly level E. ½; gently rolling W. ½. Soil, clay. Undergrowth, shadscale.</p>
	<p>N. 0°04' W., bet. secs. 14 and 15.</p> <p>Over gently rolling desert land through shadscale undergrowth.</p>
0.50	Wash, 20 lks. wide, 4 ft. deep, drains SE.
1.70	Right bank of Cisco Wash, 25 ft. deep, with stream of water, 3 lks. wide, 1 in. deep, flows SE. from irregularly N.
13.70	Left bank of Cisco Wash, 20 ft. high, bears irregularly S. 10° E. and NW.; asc. 20 ft. over gently rolling SW. slope.

Dependent Resurvey of the Subdivision, T. 21 S., R. 23 E.

CHAINS

38.25 Fence, bears N. 15°30' W. about 2.00 chs. and S. 15°30' E.

39.69 Point selected for the witness $\frac{1}{2}$ sec. cor. of secs. 14 and 15.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with glass at base, and in a collar of stone, with brass cap mkd.

T21S R23E

WC

$\frac{1}{2}$

S15 | S14

1964

39.94 Point for the $\frac{1}{2}$ sec. cor. of secs. 14 and 15 at proportionate dist. falls in cattle guard and cannot be perpetuated. There is no remaining evidence of the original cor.

Fence, bears W. 35 lks. to cor., thence S. 15°30' E.; fence bears E. 14 lks. to cor., thence N. 0°15' W., thence along W. side of fence.

55.40 Abandoned railroad grade, bears E. and W.; asc. 65 ft. over SE. slope.

73.35 Spur, slopes SW.; desc. 25 ft. over NW. slope.

79.88 The cor. of secs. 10, 11, 14 and 15, monumented with a redwood post, 4x4x24 ins., set in fence line, and plainly mkd. 2 notches on E. and 4 on S. edges, with dim scribe marks on NE. and SE. faces.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T21S R23E

S10 | S11

S15 | S14

1964

Bury original redwood cor. alongside iron post, and raise a mound of stone, 3 ft. base, 1½ ft. high, W. of cor.

Land, rolling desert.

Soil, clay.

Undergrowth, shadscale.

From the cor. of secs. 11, 12, 13 and 14.

N. 89°56' W., bet. secs. 11 and 14.

Over rolling desert land through shadscale undergrowth. Desc. 25 ft. over SW. slope.

5.70 Wash, 15 lks. wide, 3 ft. deep, drains S.; asc. 20 ft. over E. slope.

12.80 Spur, slopes SW.; desc. 55 ft. over NW. slope.

24.95 Wash, 30 lks. wide, 10 ft. deep, drains S.; asc. 35 ft. over E. slope.

Dependent Resurvey of the Subdivision, T. 21 S., R. 23 E.

CHAINS

- 33.20 Spur, slopes S.; desc. 35 ft. over SW. slope.
 - 36.95 Wash, 20 lks. wide, 6 ft. deep, drains S.; asc. 5 ft. over SE. slope.
 - 40.01 The $\frac{1}{4}$ sec. cor. of secs. 11 and 14, monumented with a redwood post, 3x6x24 ins., firmly set and plainly mkd. $\frac{1}{4}$ on N. face.
 At the cor. point
 Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 20 ins. in the ground, with glass at base, and brass cap mkd.

T21S R23E
 $\frac{1}{4}$ $\frac{S11}{S14}$
 1964

 Bury original redwood cor. alongside iron post.
 No accessories available.

 N. 89°54' W., beginning new measurement.
 Asc. 60 ft. over SE. slope.
 - 1.65 Wash, 40 lks. wide, 10 ft. deep, drains S. 30° E.
 - 12.50 Wash, 10 lks. wide, 5 ft. deep, drains SE.
 - 14.95 Old railroad grade, bears N. 10° W. and S. 10° E.
 - 33.85 Low ridge, bears N. and S.; desc. 25 ft. over NW. slope.
 - 40.07 The cor. of secs. 10, 11, 14 and 15.
 Land, rolling desert.
 Soil, clay.
 Undergrowth, shadscale.
-
- N. 0°04' E., bet. secs. 10 and 11.
 Over rolling desert land through shadscale undergrowth and along fence line. Desc. 5 ft. over NW. slope.
 - 1.30 Wash, 10 lks. wide, 1 ft. deep, drains SW.; asc. 40 ft. over series of small clay spurs sloping SW.
 - 28.20 Slope changes; asc. 20 ft. over SE. slope.
 - 40.07 The $\frac{1}{4}$ sec. cor. of secs. 10 and 11, monumented with a redwood post, 4x4x24 ins., firmly set and plainly mkd. $\frac{1}{4}$ on W. face.
 At the cor. point
 Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with glass at base, and brass cap mkd.

T21S R23E
 $\frac{1}{4}$
 S10|S11
 1964

 Bury original redwood cor. alongside iron post, and raise a mound of stone, 3 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.

 N. 0°01' E., beginning new measurement.
 Continue along fence line; asc. 15 ft. over SE. slope.
 - 22.95 Spur, slopes SW.; desc. 25 ft. over NW. slope.

Dependent Resurvey of the Subdivision, T. 21 S., R. 23 E.

CHAINS
40.00

The cor. of secs. 2, 3, 10 and 11, monumented with a redwood post, 4x4x24 ins., firmly set and plainly mkd. T21SS2 on NE., S11 on SE., S10 on SW. and S3 on NW. faces, with 2 notches on E. and 5 on S. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with glass at base, and brass cap mkd.

T21S R23E

S3 | S2
S10 | S11

1964

Bury original redwood cor. alongside iron post, and raise a mound of stone, 3 ft. base, 1½ ft. high, W. of cor.

Land, rolling desert.

Soil, clay.

Undergrowth, shadscale.

From the true point for cor. of secs. 1, 2, 11 and 12.

N. 89°51' W., bet. secs. 2 and 11.

Over rolling desert land through shadscale undergrowth. Asc. 65 ft. over NE. slope.

0.90 The witness cor. of secs. 1, 2, 11 and 12, hereinbefore described.

10.75 Small draw, drains NE.

20.65 Spur, slopes SE.; desc. 10 ft. over gentle SW. slope.

36.55 Trail road, bears NW. and SE.

40.03 The ¼ sec. cor. of secs. 2 and 11, monumented with a redwood post, 4x4x24 ins., firmly set and plainly mkd. ¼ on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with glass at base, and brass cap mkd.

T21S R23E

¼ S2
S11

1964

Bury original redwood cor. alongside iron post, and raise a mound of stone, 3 ft. base, 1½ ft. high, N. of cor.

N. 89°53' W., beginning new measurement.

Over gently rolling desert land.

40.06 The cor. of secs. 2, 3, 10 and 11.

Land, gently rolling desert.

Soil, clay.

Undergrowth, shadscale.

N. 0°03' E., bet. secs. 2 and 3.

Over rolling desert land through shadscale undergrowth. Asc. 60 ft. over SW. slope over series of small clay spurs sloping SW. and along fence line.

39.96 Point for the ¼ sec. cor. of secs. 2 and 3 at proportionate dist.; there is no remaining evidence of the original cor.

Dependent Resurvey of the Subdivision, T. 21 S., R. 23 E.

CHAINS	
	<p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with glass at base, and brass cap mkd.</p> <p style="text-align: center;">T21S R23E ¼ S3 S2 1964</p> <p>Raise a mound of stone, 2 ft. base, 2 ft. high, W. of cor.</p> <p>Continue along fence line; asc. 20 ft. over SW. slope.</p>
42.25	<p>Trail road, on low ridge, bears NW. and SE.; asc. 15 ft. over gentle SE. slope.</p>
79.67	<p>The standard cor. of secs. 34 and 35, T. 20 S., R. 23 E., on the N. bdy. of the Tp., monumented with an iron post, 2 ins. diam., set, mkd. and witnessed as described in the official record. This cor. will also function as the cor. of secs. 2 and 3, and I remark to read</p> <p style="text-align: center;">T20S R23E S C <u>S34 S35</u> S3 S2 T21S 1964 1923</p> <p>Cor. is located at cor. of fence, with fence bearing S. and NW.</p> <p>Land, rolling desert. Soil, clay. Undergrowth, shadscale.</p>
	<p>The standard ¼ sec. cor. of sec. 35, T. 20 S., R. 23 E., on the N. bdy. of the Tp., monumented with an iron post, 1 in. diam., set, mkd. and witnessed as described in the official record, will also function as the N. ¼ sec. cor. of sec. 2, and I remark to read</p> <p style="text-align: center;">T20S R23E SC <u>¼ S35</u> S2 T21S 1964 1923</p>
35.45	<p>From the cor. of secs. 33 and 34, on the S. bdy. of the Tp., monumented with an iron post, 3 ins. diam., set, mkd. and witnessed as described in the official record.</p> <p>N. 0°05' W., bet. secs. 33 and 34.</p> <p>Over rolling desert land through shadscale undergrowth. Asc. 75 ft. over SE. slope.</p>
39.99	<p>Ridge, bears E. and W.; desc. 15 ft. over NE. slope.</p> <p>Point for the ¼ sec. cor. of secs. 33 and 34 at proportionate dist.; there is no remaining evidence of the original cor.</p>

Independent Resurvey of the Subdivision, T. 21 S. R. 23 E.

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with glass at base, and brass cap mkd.

T21S R23E

¼

S33|S34

1964

Raise a mound of stone, 3 ft. base, 1½ ft. high, W. of cor.

Desc. 50 ft. over NE. slope.

70.00 Wash, 10 lks. wide, 3 ft. deep, drains E.; asc. 30 ft. over SW. slope.

70.05 Telephone line, 6 wire, bears about N. 70° E. and S. 70° W. on slight bend.

71.10 Wash, 20 lks. wide, 6 ft. deep, drains SE.

76.60 Low clay knoll; desc. 10 ft. over N. slope.

79.98 Point for the cor. of secs. 27, 28, 33 and 34 at proportionate dist. falls in oiled surface of U. S. Highway 50 and 6, bears N. 72°30' E. and S. 72°30' W.; there is no remaining evidence of the original cor.

Drive a railroad spike at cor. point.

from which

An iron post, 30 ins. long, 2½ ins. diam., set 20 ins. in the ground, and in a collar of stone, for a reference monument, bears S. 45° E., 60 ft. dist., with brass cap mkd. T21S R23E S34 RM 60 FT 1964, and an arrow pointing to the true cor.

An iron post, 30 ins. long, 2½ ins. diam., set 20 ins. in the ground, and in a collar of stone, for a reference monument, bears N. 45° W., 60 ft. dist., with brass cap mkd. T21S R23E S28 RM 60 FT 1964, and an arrow pointing to the true cor.

Land, rolling desert.

Soil, clay.

Undergrowth, shadscale.

From the cor. of secs. 26, 27, 34 and 25.

N. 89°57' W., bet. secs. 27 and 34.

Over rolling desert land through shadscale undergrowth. Asc. 10 ft. over NE. slope.

0.52 Transmission line, 4 wire, bears N. 20°50' W. and S. 20°50' E.

5.05 Low spur, slopes NW., desc. 20 ft. over SW. slope.

9.30 Improved dirt road, bears N. 30° W. and S. 30° E.

31.00 Wash, 15 lks. wide, 1 ft. deep, drains S.; asc. 5 ft. over SE. slope.

Dependent Resurvey of the Subdivision, T. 21 S., R. 23 E.

<p>CHAINS 40.15</p>	<p>The $\frac{1}{2}$ sec. cor. of secs. 27 and 34, monumented with a sandstone, 14x10x3 ins., firmly set and plainly mkd. $\frac{1}{2}$ on N. face.</p> <p>At the cor. point</p> <p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with glass at base, and brass cap mkd.</p> <p style="text-align: center;">T21S R23E</p> <p style="text-align: center;">$\frac{1}{4}$ $\frac{S27}{S34}$</p> <p style="text-align: center;">1964</p> <p>Bury original stone cor. alongside iron post, and raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.</p> <hr style="width: 20%; margin: auto;"/> <p>S. $89^{\circ}49'$ W., beginning new measurement.</p> <p>Asc. 25 ft. over SE. slope.</p>
<p>11.45</p>	<p>Telephone line, 6 wire, bears N. $61^{\circ}45'$ E. and S. $61^{\circ}45'$ W.</p>
<p>35.00</p>	<p>Low spur, slopes NW.; desc. 5 ft. along N. slope.</p>
<p>40.16</p>	<p>The cor. of secs. 27, 28, 33 and 34.</p> <p>Land, rolling desert. Soil, clay. Undergrowth, shadscale.</p>
<p>0.87</p>	<p>N. $0^{\circ}39'$ E., bet. secs. 27 and 28.</p> <p>Over rolling desert land through shadscale undergrowth.</p> <p>Fence, bears N. $72^{\circ}30'$ E. and S. $72^{\circ}30'$ W.</p>
<p>10.49</p>	<p>Denver and Rio Grande Western Railroad, bears N. $86^{\circ}07'$ E. and S. $86^{\circ}07'$ W.</p>
<p>11.21</p>	<p>Telephone line, 24 wire, parallel to railroad.</p>
<p>39.99</p>	<p>The $\frac{1}{2}$ sec. cor. of secs. 27 and 28, monumented with a redwood post, 4x6x24 ins., firmly set and dimly mkd. $\frac{1}{2}$ on W. face.</p> <p>At the cor. point</p> <p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T21S R23E</p> <p style="text-align: center;">$\frac{1}{4}$</p> <p style="text-align: center;">S28 S27</p> <p style="text-align: center;">1964</p> <p>Bury original redwood cor. alongside iron post, and raise a mound of stone, 3 ft. base, $2\frac{1}{2}$ ft. high, W. of cor.</p> <hr style="width: 20%; margin: auto;"/> <p>N. $0^{\circ}01'$ E., beginning new measurement.</p> <p>Asc. 20 ft. over SW. slope.</p>
<p>9.00</p>	<p>Low ridge, bears NW. and SE.; desc. 35 ft. over NE. slope.</p>

Dependent Resurvey of the Subdivision, T. 21 S., R. 23 E.

CHAINS
40.13

The cor. of secs. 21, 22, 27 and 28, monumented with a sandstone, 16x12x8 ins., set in small mound of stone, and mkd. 2 notches on S. and 3 on E. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, with glass at base, and in a collar of stone, with brass cap mkd.

T21S R23E

$\frac{S21}{S28} | \frac{S22}{S27}$

1964

Bury original stone cor. alongside iron post.

Land, gently rolling desert.

Soil, clay.

Undergrowth, shadscale.

From the cor. of secs. 22, 23, 26 and 27.

N. 89°59' W., bet. secs. 22 and 27.

Over rolling desert land through shadscale undergrowth. Asc. 5 ft. over NE. slope.

3.70 Wash, 20 lks. wide, 2 ft. deep, drains NE.

10.70 Wash, 15 lks. wide, 2 ft. deep, drains NE.; asc. 15 ft. over SE. slope.

27.80 Slope changes; asc. 15 ft. over E. slope.

40.10 The ¼ sec. cor. of secs. 22 and 27, monumented with a sandstone, 14x8x6 ins., firmly set and plainly mkd. ½ on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with glass at base, and in a collar of stone, with brass cap mkd.

T21S R23E

$\frac{1}{4} \frac{S22}{S27}$

1964

Bury original stone cor. alongside iron post.

N. 89°59' W., beginning new measurement.

Asc. 5 ft. over E. slope.

0.90 Slope changes; asc. 25 ft. over NE. slope.

40.08 The cor. of secs. 21, 22, 27 and 28.

Land, rolling desert.

Soil, clay.

Undergrowth, shadscale.

Dependent Resurvey of the Subdivision, T. 21 S., R. 23 E.

CHAINS

N. 0°01' E., bet. secs. 21 and 22.

Over gently rolling land through shadscale undergrowth.
Desc. 30 ft. over gentle NE. slope.

15.85 Wash, 5 lks. wide, 2 ft. deep; drains N. 70° E.

39.60 Wash, 50 lks. wide, 8 ft. deep, drains E.

40.03 Point for the 1/4 sec. cor. of secs. 21 and 22 at proportionate dist. falls at N. edge of wash, and deemed unsafe to perpetuate; there is no remaining evidence of the original cor.

41.04 Point selected for the witness 1/4 sec. cor. of secs. 21 and 22.

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with glass at base, and brass cap mkd.

T21S R23E

1/4

S21|S22

↓

WC

1964

Raise a mound of stone, 3 ft. base, 1 1/2 ft. high, W. of cor.

45.75 Wash, 1.00 ch. wide, 10 ft. deep, drains E.

48.75 Wash, 1.00 ch. wide, 8 ft. deep, drains SE.; asc. 75 ft. over SE. slope.

65.10 Abandoned railroad grade, bears E. and W.

80.06 The cor. of secs. 15, 16, 21 and 22, monumented with a sandstone, 18x10x6 ins., firmly set and plainly mkd. 3 notches on S. and E. edges, and 21S on NE. face.

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with glass at base, and in a collar of stone, with brass cap mkd.

T21S R23E

S16|S15

S21|S22

1964

Bury original stone cor. alongside iron post.

Land, rolling desert.
Soil, clay.
Undergrowth, shadscale.

From the cor. of secs. 14, 15, 22 and 23.

N. 89°44' W., bet. secs. 15 and 22.

Over rolling desert land through shadscale undergrowth.
Asc. 55 ft. over NE. slope.

12.00 Low spur, slopes NW.; asc. 25 ft. over NE. slope.

Dependent Resurvey of the Subdivision T. 21 S., R. 23E.

CHAINS

- 17.10 Wash, drains NE.
- 18.00 Wash, drains NE.
- 20.80 Spur, slopes NE.; desc. 55 ft. over NW. slope.
- 24.30 Draw, drains NE.; asc. 65 ft. over SE. slope.
- 35.15 Low spur, slopes NE.; desc. 15 ft. over NW. slope.
- 39.97 The $\frac{1}{4}$ sec. cor. of secs. 15 and 22, monumented with redwood post, 4x4x18 ins., above ground, plainly mkd. $\frac{1}{4}$ on N. face.
- At the cor. point
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with glass at base, and in a collar of stone, with brass cap mkd.
- T21S R23E
- $\frac{1}{4}$ $\frac{S15}{S22}$
- 1964
- Bury original redwood cor. alongside iron post.
-
- S. 89°27' W., beginning new measurement,
- Asc. 10 ft. along N. slope.
- 5.80 Old railroad grade, bears NE. and SW.
- 12.00 Wash, 10 lks. wide, 3 ft. deep, drains NE.; asc. 65 ft. over SE. slope.
- 40.44 The cor. of secs. 15, 16, 21 and 22.
- Land, rolling desert.
Soil, sandy clay.
Undergrowth, shadscale.
-
- N. 0°07' E., bet. secs. 15 and 16.
- Over rolling desert land through shadscale undergrowth.
Asc. 15 ft. over SE. slope.
- 2.70 Low ridge, bears NE. and SW.; desc. 25 ft. over NW. slope.
- 24.50 Draw, drains NE.; asc. 10 ft. over SE. slope.
- 27.70 Spur, slopes NE.; desc. 20 ft. over NW. slope.
- 30.80 Draw, drains E.; asc. 15 ft. over S. slope.
- 32.20 Low ridge, bears E. and W.; desc. 20 ft. over N. slope.
- 33.70 Draw, drains N. 80° E.; asc. 15 ft. over SE. slope.
- 40.21 Point for the $\frac{1}{4}$ sec. cor. of secs. 15 and 16 at proportionate dist.; there is no remaining evidence of the original cor.
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with glass at base, and brass cap mkd.

Dependent Resurvey of the Subdivision, T. 21 S., R. 23 E.

CHAINS	
	T21S R23E $\frac{1}{4}$ S16 S15 1964
	Raise a mound of stone, 3 ft. base, 1½ ft. high, W. of cor. Asc. 10 ft. over SE. slope.
56.85	Center of stock pond, 3.00 chs. wide.
59.00	Wash, drains N. 60° E.; asc. 60 ft. over SE. slope.
63.10	Low spur, slopes E.
67.00	Spur, slopes E.; desc. 60 ft. over NE. slope.
80.42	The cor. of secs. 9, 10, 15 and 16, monumented with a sandstone, 18x10x10 ins., loosely set and dimly mkd. 3 notches on one edge. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with glass at base, and brass cap mkd.
	T21S R23E $\frac{1}{4}$ <u>S9 S10</u> S16 S15 1964
	Bury original stone cor. alongside iron post, and raise a mound of stone, 3 ft. base, 1½ ft. high, W. of cor. Land, rolling desert. Soil, clay. Undergrowth, shadscale.
	From the cor. of secs. 10, 11, 14 and 15. N. 89°56' W., bet. secs. 10 and 15. Over rolling desert land through shadscale undergrowth. Desc. 40 ft. over NW. slope.
2.00	Wash, 10 lks. wide, 2 ft. deep, drains SW.
14.80	Wash, 10 lks. wide, 2 ft. deep, drains S. 20° W.; asc. 20 ft. over SE. slope.
19.20	Small spur, slopes S. 20° W.; desc. 30 ft. over NW. slope
25.90	Wash, 15 lks. wide, 1 ft. deep, drains S. 20° W.; asc. 25 ft. over E. slope.
29.80	Spur, slopes S.; trail road, bears N. 20° E. and S. 20° W.; desc. 10 ft. over SW. slope.
40.03	The ¼ sec. cor. of secs. 10 and 15, monumented with a sandstone, 16x12x3 ins., firmly set and plainly mkd. ¼ on N. face. At the cor. point

Dependent Resurvey of the Subdivision T. 21 S., R. 23 E.

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with glass at base, and brass cap mkd.

T21S R23E

$$\frac{1}{4} \frac{S10}{S15}$$

1964

Bury original stone cor. alongside iron post, and raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

N. $89^{\circ}38'$ W., beginning new measurement.

Desc. 20 ft. over SW. slope.

- 4.40 Wash, 25 lks. wide, 7 ft. deep, drains S. 20° W., thence over nearly level land.
- 33.75 Left bank of Cisco Wash, 20 ft. deep, with stream of water, 3 lks. wide, 1 in. deep, flows S. 15° E.
- 39.90 Right bank of Cisco Wash, bears N. 15° W. and S. 15° E.; asc. 10 ft. over NE. slope.
- 40.17 The cor. of secs. 9, 10, 15 and 16.

Land, rolling desert E. portion; nearly level W. portion. Soil, clay.

Undergrowth, shadscale, with scattered willows along Cisco Wash.

N. $0^{\circ}06'$ E., bet. secs. 9 and 10.

Over nearly level desert land through shadscale and scattered willows.

- 4.40 Cisco Wash, with stream of water, 3 lks. wide, 1 in. deep, flows SE.; asc. 25 ft. over gentle SW. slope. Leave willows.
- 39.91 The $\frac{1}{4}$ sec. cor. of secs. 9 and 10, monumented with a redwood post, 4x6x18 ins. above ground, plainly mkd. $\frac{1}{4}$ on W. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with glass at base, and brass cap mkd.

T21S R23E

$$\frac{1}{4}$$

S9|S10

1964

Bury original redwood cor. alongside iron post, and raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

N. $0^{\circ}05'$ E., beginning new measurement.

Asc. 30 ft. over gentle SE. slope.

- 15.70 Spur, slopes SW.; desc. 15 ft. over gentle NW. slope.

Dependent Resurvey of the Subdivision, T. 21 S., R. 23 E.

CHAINS
39.92

The cor. of secs. 3, 4, 9 and 10, monumented with a redwood post, 4x4x24 ins. above ground, plainly mkd. 5 notches on S. and 3 on E. edges, with dim scribe marks on NE, and SE. faces.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with glass at base, and brass cap mkd.

T21S R23E

S4	S3
S9	S10

1964

Bury original redwood cor. alongside iron post, and raise a mound of stone, 3 ft. base, 1½ ft. high, W. of cor.

Land, gently rolling desert.

Soil, clay.

Undergrowth, shadscale, with scattered willows along Cisco Wash.

From the cor. of secs. 2, 3, 10 and 11.

N. 89°55' W., bet. secs. 3 and 10.

Over rolling desert land through shadscale undergrowth. Asc. 15 ft. over gently rolling land.

13.60

Wash, 15 lks. wide, 2 ft. deep, drains S.

40.09

The ¼ sec. cor. of secs. 3 and 10, monumented with a redwood post, 4x4x18 ins. above ground, plainly mkd. ¼ on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with glass at base, and brass cap mkd.

T21S R23E

¼ S3
S10

1964

Bury original redwood cor. alongside iron post, and raise a mound of stone, 3 ft. base, 1½ ft. high, N. of cor.

N. 89°56' W., beginning new measurement.

Desc. 30 ft. over gently rolling desert land.

4.80

Wash, 30 lks. wide, 3 ft. deep, drains S.

12.95

Wash, 10 lks. wide, 4 ft. deep, drains S.

40.08

The cor. of secs. 3, 4, 9 and 10.

Land, gently rolling desert.

Soil, clay.

Undergrowth, shadscale.

- CHAINS
- Dependent Resurvey of the Subdivision, T. 21 S., R. 23 E.
 N. 0°01' E., bet. secs. 3 and 4.
- Over gently rolling desert land through shadscale undergrowth.
- 1.30 Wash, 5 lks. wide, 4 ft. deep, drains SW.; asc. 50 ft. over SE. slope.
- 29.40 Low ridge, bears NE. and SW.; desc. 20 ft. over NW. slope.
- 40.06 The $\frac{1}{4}$ sec. cor. of secs. 3 and 4, monumented with a redwood post, 3x4x18 ins. above ground, plainly mkd. $\frac{1}{4}$ on W. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. i the ground, with glass at base, and brass cap mkd.

T21S R23E

$\frac{1}{4}$

S4|S3

1964

Bury original redwood cor. alongside iron post, and raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

N. 0°01' E., beginning new measurement.

Desc. 10 ft. over NW. slope.

- 3.20 Wash, 30 lks. wide, 10 ft. deep, drains SW.
- 6.20 Wash, 20 lks. wide, 10 ft. deep, drains SW.; asc. 60 ft. over SE. slope.
- 39.71 The standard cor. of secs. 33 and 34, T. 20 S., R. 23 E. on the N. bdy. of the Tp., monumented with an iron post, 2 ins. diam., set and mkd. as described in the official record. This cor. will also function as the cor. of sec. 3 and 4, and I remark to read

T20S R23E

S C

S33|S34
 S4|S3

T21S

1964

1923

Land, gently rolling desert.
 Soil, clay.
 Undergrowth, shadscale.

The standard $\frac{1}{4}$ sec. cor. of sec. 34, T. 20 S., R. 23 E., on the N. bdy. of the Tp., monumented with an iron post, 1 in. diam., set and mkd. as described in the official record, will also function as the N. $\frac{1}{4}$ sec. cor. of sec. 3, and I remark to read

Dependent Resurvey of the Subdivision, T. 21 S., R. 23 E.

CHAINS

T20S R23E
SC

$\frac{1}{4}$ $\frac{S34}{S3}$

T21S
1964
1923

From the cor. of secs. 32 and 33, on the S. bdy. of the Tp., monumented with an iron post, 3 ins. diam., set, mkd. and witnessed as described in the official record.

N. 0°03' W., bet. secs. 32 and 33.

Over gently rolling desert land through shadscale undergrowth. Asc. 20 ft. over gentle SW. slope.

40.39

Point for the $\frac{1}{4}$ sec. cor. of secs. 32 and 33 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with glass at base, and brass cap mkd.

T21S R23E
 $\frac{1}{4}$

S32|S33

1964

Raise a mound of stone, 5 ft. base, 1½ ft. high, W. of cor.

Asc. 35 ft. over gentle SW. slope.

50.89

Telephone line, 6 wire, bears N. 79°56' E. and S. 79°56' W.

54.82

Center of U. S. Highway 50 and 6, bears N. 72°10' E. and S. 72°10' W.

60.63

Fence, bears about N. 77° E. and S. 77° W.

73.80

Wash, drains SW.

80.78

The cor. of secs. 28, 29, 32 and 33, monumented with a sandstone, 24x10x6 ins., firmly set in mound of stone, and mkd. 1 notch on S. and 4 notches on E. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with glass at base, and brass cap mkd.

T21S R23E

$\frac{S29|S28}{S32|S33}$

1964

Bury original stone cor. alongside iron post, and raise a mound of stone, 3 ft. base, 1½ ft. high, W. of cor.

Land, gently rolling desert.

Soil, clay.

Undergrowth, shadscale.

Dependent Resurvey of the Subdivision, T. 21 S., R. 23 E.

CHAINS

From the cor. of secs. 27, 28, 33 and 34.

N. 89°42' W., bet. secs. 28 and 33.

Over rolling desert land through shadscale undergrowth.
Desc. 5 ft. over gentle SW. slope.

0.15 Center of U. S. Highway 50 and 6, bears N. 72°30' E. and
S. 72°30' W.

2.90 Fence, parallel to highway.

7.35 Wash, 10 lks. wide, 2 ft. deep, drains SE.; asc. 25 ft.
over gentle NE. slope.

40.14 The 1/4 sec. cor. of secs. 28 and 33, monumented with a
sandstone, 14x8x6 ins., firmly set and plainly mkd. 1/4 on
N. face.

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in
the ground, with glass at base, and brass cap mkd.

T21S R23E

1/4 $\frac{S28}{S33}$

1964

Bury original stone cor. alongside iron post, and raise
a mound of stone, 3 ft. base, 1 1/2 ft. high, N. of cor.

N. 89°05' W., beginning new measurement.

Asc. 25 ft. over NE. slope.

14.20 Improved gravel road, bears N. 21° W. and S. 21° E.

30.15 Low ridge, bears N. and S.; desc. 55 ft. over W. slope.

36.40 Wash, 15 lks. wide, 1 ft. deep, drains S. 25° W.; asc.
5 ft. over E. slope.

39.95 The cor. of secs. 28, 29, 32 and 33.

Land, rolling desert.

Soil, clay.

Undergrowth, shadscale.

N. 0°14' E., bet. secs. 28 and 29.

Over rolling desert land through shadscale undergrowth.
Asc. 55 ft. over SE. slope.

5.45 Denver and Rio Grande Western Railroad, on curve, bears
about N. 85°30' E. and S. 85°30' W.

6.24 Telephone line, 24 wire, parallel to railroad.

9.00 Top of ascent, bears NW. and E.; thence over nearly level
land.

39.50 Trail road, bears E. and W.

39.63 Point for the 1/4 sec. cor. of secs. 28 and 29 at propor-
tionate dist.; there is no remaining evidence of the

Dependent Resurvey of the Subdivision, T. 21 S., R. 23 E.

CHAINS

original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with glass at base, and brass cap mkd.

T21S R23E

¼

S29|S28

1964

Raise a mound of stone, 3 ft. base, 1½ ft. high, W. of cor.

Continue over nearly level land.

44.45 Abandoned railroad grade, bears N. 70° E. and S. 70° W.

68.25 Improved gravel road, bears N. 21° W. and S. 21° E.

79.26 The cor. of secs. 20, 21, 28 and 29, monumented with a sandstone, 16x12x6 ins., firmly set in a mound of stone, and plainly mkd. 2 notches on S. and 4 on E. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with glass at base, and in a collar of stone, with brass cap mkd.

T21S R23E

S20|S21
S29|S28

1964

Bury original stone cor. alongside iron post.

Land, rolling desert.

Soil, gravelly clay.

Undergrowth, shadscale.

From the cor. of secs. 21, 22, 27 and 28.

S. 89°57' W., bet. secs. 21 and 28.

Over gently rolling desert land through shadscale undergrowth. Asc. 20 ft, over NE. slope.

23.50 Wash, 10 lks. wide, 1 ft. deep, drains NE.; asc. 15 ft. over NE. slope.

40.07 The ¼ sec. cor. of secs. 21 and 28, monumented with a sandstone, 12x8x2 ins., firmly set and plainly mkd. ¼ on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, with glass at base, and in a collar of stone, with brass cap mkd.

T21S R23E

¼ S21
S28

1964

Bury original stone cor. alongside iron post.

Dependent Resurvey of the Subdivision, T. 21 S., R. 23 E.
 CHAINS S. 89°59' W., beginning new measurement.

- Asc. 35 ft. over NE. slope.
- 12.00 Abandoned railroad grade, bears N. and S.
- 26.50 Trail road, bears NE. and SW.
- 40.12 The cor. of secs. 20, 21, 28 and 29.

Land, gently rolling desert.
 Soil, sandy clay.
 Undergrowth, shadscale.

North, bet. secs. 20 and 21.

Over rolling desert land through shadscale undergrowth.
 Asc. 20 ft. along gentle E. slope.

- 3.50 Wash, 10 lks. wide, 3 ft. deep, drains E.
- 13.50 Low ridge, bears NW. and SE.; desc. 30 ft. over NE. slope.
- 30.75 Trail road, bears SW. and curves about N. 10° E.
- 40.13 The ¼ sec. cor. of secs. 20 and 21, monumented with a sandstone, 16x10x4 ins., firmly set and plainly mkd. ¼ on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with glass at base, and brass cap mkd.

T21S R23E

¼

S20|S21

1964

Bury original stone cor. alongside iron post, and raise a mound of stone, 3 ft. base, 1½ ft. high, W. of cor.

N. 0°03' E., beginning new measurement.

Desc. 10 ft. over gentle NE. slope.

- 13.90 Wash, 20 lks. wide, 10 ft. deep, drains E.; asc. 20 ft. over gently rolling land.
- 38.20 Wash, 10 lks. wide, 2½ ft. deep, drains E.
- 40.08 The cor. of secs. 16, 17, 20 and 21, monumented with a sandstone, 20x12x6 ins., firmly set and plainly mkd. 3 notches on S. and 4 on E. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with glass at base, and brass cap mkd.

T21S R23E

S17|S16
 S20|S21

1964

Dependent Resurvey of the Subdivision, T. 21 S., R. 23 E.

CHAINS

Bury original stone cor. alongside iron post, and raise a mound of stone, 3 ft. base, 1½ ft. high, W. of cor.

Land, gently rolling desert.
Soil, clay.
Undergrowth, shadscale.

From the cor. of secs. 15, 16, 21 and 22.

N. 89°55' W., bet. secs. 16 and 21.

Over rolling desert land through shadscale undergrowth.
Asc. 5 ft. over series of small clay spurs sloping S.

9.80 Desc. 40 ft. over NW. slope.

23.75 Wash, 1.00 ch. wide, 10 ft. deep, drains SE.; asc. 15 ft. over SE. slope.

39.70 Wash, 20 lks. wide, 2 ft. deep, drains SE.

40.09 Point for the ¼ sec. cor. of secs. 16 and 21 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T21S R23E

¼ S16
¼ S21

1964

Raise a mound of stone, 3 ft. base, 1½ ft. high, N. of cor.

Asc. 40 ft. over SE. slope.

75.50 Trail road, bears N. and S.

80.18 The cor. of secs. 16, 17, 20 and 21.

Land, rolling desert.
Soil, clay.
Undergrowth, shadscale.

N. 0°07' E., bet. secs. 16 and 17.

Over gently rolling desert land through shadscale undergrowth.

40.12 The ¼ sec. cor. of secs. 16 and 17, monumented with a redwood post, 4x4x24 ins., badly decayed with portion in ground. No marks visible, but accepted as the original cor.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with glass at base, and brass cap mkd.

T21S R23E

¼
S17 | S16

1964

Dependent Resurvey of the Subdivision, T. 21 S., R. 23 E.

CHAINS

Bury remains of redwood cor. alongside iron post, and raise a mound of stone, 3 ft. base, 1½ ft. high, W. of cor.

N. 0°23' E., beginning new measurement.

Asc. 25 ft. over gently rolling S. slope.

6.20 Trail road, bears W. and NE. about 10.00 chs. thence curves S.

7.30 Low ridge, bears E. and W.; desc. 45 ft. over NW. slope.

34.50 Wash, 10 lks. wide, 4 ft. deep, drains N. 70° E.; asc. 5 ft. over SE. slope.

40.16 Point for the cor. of secs. 8, 9, 16 and 17 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with glass at base, and brass cap mkd.

T21S R23E	
S8	S9
S17	S16
1964	

Raise a mound of stone, 3 ft. base, 1½ ft. high, W. of cor.

Land, gently rolling desert.

Soil, clay.

Undergrowth, shadscale.

From the cor. of secs. 9, 10, 15 and 16.

S. 89°56' W., bet. secs. 9 and 16.

Over rolling desert land through shadscale undergrowth. Asc. 65 ft. over E. slope.

11.30 Spur, slopes NE.; desc. 60 ft. over NW. slope.

22.75 Wash, 20 lks. wide, 6 ft. deep, drains NE.; asc. 75 ft. over SE. slope.

34.75 Spur, slopes NE.; desc. 10 ft. over NW. slope.

39.99 The ¼ sec. cor. of sec. 9 and 16, monumented with a sandstone, 18x15x6 ins., firmly set and plainly mkd. ¼ on N. face, and witnessed by a small mound of stone to N.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with glass at base, and brass cap mkd.

T21S R23E	
¼	S9
¼	S16
1964	

Bury original stone cor. alongside iron post, and raise a mound of stone, 3 ft. base, 1½ ft. high, N. of cor.

Dependent Resurvey of the Subdivision, T. 21 S., R. 23 E.

CHAINS

N. 89°57' W., beginning new measurement.

Desc. 20 ft. over W. slope.

14.80 Wash, 10 lks. wide, 2 ft. deep, drains NE.; asc. 25 ft. over NE. slope.

30.15 Wash, 20 lks. wide, 10 ft. deep, drains NE.

40.01 The cor. of secs. 8, 9, 16 and 17.

Land, rolling desert.

Soil, clay.

Undergrowth, shadscale.

N. 0°01' W., bet. secs. 8 and 9.

Over rolling desert land through shadscale undergrowth.
Asc. 55 ft. over rolling SE. slope.

40.16 The $\frac{1}{4}$ sec. cor. of secs. 8 and 9, monumented with a sandstone, 18x15x6 ins., firmly set and plainly mkd. $\frac{1}{4}$ on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with glass at base, and brass cap mkd.

T21S R23E

$\frac{1}{4}$

S8|S9

1964

Bury original stone cor. alongside iron post, and raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

N. 0°02' E., beginning new measurement.

Desc. 15 ft. over NW. slope.

0.30 Draw, drains NE.; asc. 30 ft. over SE. slope.

3.80 Spur, slopes E.; desc. 50 ft. over N. slope.

7.30 Draw, drains E.; asc. 60 ft. over S. slope.

11.80 Spur, slopes E.; desc. 55 ft. over NE. slope.

26.85 Right bank of Cisco Wash, bears irregularly E. and W.; wash, drains irregularly E.

30.35 Left bank of Cisco Wash, bears E. and W.; asc. 10 ft. over gentle S. slope.

39.91 The cor. of secs. 4, 5, 8 and 9, monumented with a redwood post, 4x4x18 ins. above ground, plainly mkd. 5 notches on S. and 4 on E. edges, and witnessed by a small mound of stone to W. Record calls for a trachyte stone.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with glass at base, and brass cap mkd.

Dependent Resurvey of the Subdivision, T. 21 S., R. 23 E.

CHAINS

T21S R23E

$$\frac{S5}{S8} | \frac{S4}{S9}$$

1964

Bury original redwood cor. alongside iron post, and raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

Land, rolling desert.

Soil, clay.

Undergrowth, shadscale.

From the cor. of secs. 3, 4, 9 and 10.

N. $89^{\circ}51'$ W., bet. secs. 4 and 9.

Over gently rolling desert land through shadscale undergrowth.

- 1.50 Wash, 5 lks. wide, 3 ft. deep, drains SW.
- 17.50 Wash, 20 lks. wide, 6 ft. deep, drains S.
- 23.50 Wash, 1.00 ch. wide, 10 ft. deep, drains S.
- 40.05 The $\frac{1}{4}$ sec. cor. of secs. 4 and 9, monumented with a redwood post, 4x4x18 ins. above ground, plainly mkd. $\frac{1}{4}$ on N. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with glass at base, and brass cap mkd.

T21S R23E

$$\frac{1}{4} \frac{S4}{S9}$$

1964

Bury original redwood cor. alongside iron post, and raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

N. $89^{\circ}49'$ W., beginning new measurement.

- 32.80 Wash, 10 lks. wide, 4 ft. deep, drains S.

- 40.07 The cor. of secs. 4, 5, 8 and 9.

Land, gently rolling desert.

Soil, clay.

Undergrowth, shadscale.

N. $0^{\circ}04'$ E., bet. secs. 4 and 5.

Asc. 50 ft. over gently rolling desert land through shadscale undergrowth.

- 40.08 The $\frac{1}{4}$ sec. cor. of secs. 4 and 5, monumented with a redwood post, 4x6x12 ins. above ground, plainly mkd. $\frac{1}{4}$ on W. face.

At the cor. point

Final Resurvey of the Subdivision, T. 21 S., R. 23 E.

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with glass at base, and brass cap mkd.

T21S R23E

$\frac{1}{4}$

S5|S4

1964

Bury original redwood cor. alongside iron post, and raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

North, beginning new measurement.

Asc. 85 ft. over rolling desert land.

22.10 Wash, 10 lks. wide, 2 ft. deep, drains W.

39.68 The standard cor. of secs. 32 and 33, T. 20 S., R. 23 E. on the N. bdy. of the Tp., monumented with an iron post, 2 ins. diam., set and mkd. as described in the official record. This cor. will also function as the cor. of secs. 4 and 5, and I remark to read

T20S R23E

S C

S32|S33

S5|S4

T21S

1964

1923

Land, rolling desert.

Soil, clay.

Undergrowth, shadscale.

The standard $\frac{1}{4}$ sec. cor. of sec. 33, T. 20 S., R. 23 E., on the N. bdy. of the Tp., monumented with an iron post, 1 in. diam., set and mkd. as described in the official record, will also function as the N. $\frac{1}{4}$ sec. cor. of sec. 4, and I remark to read

T20S R23E

SC

$\frac{1}{4}$ S33

S4

T21S

1964

1923

From the cor. of secs. 31 and 32, on the S. bdy. of the Tp., monumented with an iron post, 3 ins. diam., set and mkd. as described in the official record.

N. $0^{\circ}13'$ W., bet. secs: 31 and 32.

Over rolling desert land through shadscale undergrowth. Asc. 25 ft. over gentle SW. slope.

37.00 Telephone line, 6 wire, bears N. $85^{\circ}26'$ E. and S. $85^{\circ}26'$ W.

40.15 Point for the $\frac{1}{4}$ sec. cor. of secs. 31 and 32 at proportionate dist.; there is no remaining evidence of the original cor.

Dependent Resurvey of the Subdivision, T. 21 S., R. 23 E.

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with glass at base, and brass cap mkd.

T21S R23E

$\frac{1}{4}$

S31|S32

1964

Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

41.55 Center of U. S. Highway 50 and 6, bears N. $87^{\circ}11'$ E. and S. $87^{\circ}11'$ W.

43.00 Desc. 30 ft. over gentle NE. slope.

80.30 The cor. of secs. 29, 30, 31 and 32, monumented with a sandstone, 16x12x6 ins., firmly set and plainly mkd. 1 notch on S. and 5 on E. edges.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with glass at base, and in a collar of stone, with brass cap mkd.

T21S R23E

S30|S29

S31|S32

1964

Bury original stone cor. alongside iron post.

Land, gently rolling desert.

Soil, clay.

Undergrowth, shadscale.

From the cor. of secs. 28, 29, 32 and 33.

S. $89^{\circ}10'$ W., bet. secs. 29 and 32.

Over rolling desert land through shadscale undergrowth. Asc. 30 ft. over W. slope.

8.65 Spur, slopes S.; trail road, bears N. and S.; desc. 35 ft. over W. slope.

12.45 Wash, 20 lks. wide, 2 ft. deep, drains S.; asc. 45 ft. over E. slope.

23.60 Spur, slopes S.; desc. 30 ft. over NW. slope.

27.20 Draw, drains N.; asc. 35 ft. over NE. slope.

31.35 Spur, slopes N.; desc. 60 ft. over W. slope.

35.00 Wash, 10 lks. wide, 3 ft. deep, drains S. 25° W.; asc. 25 ft. over SE. slope.

40.20 Spur, slopes S.

40.39 The $\frac{1}{4}$ sec. cor. of secs. 29 and 32, monumented with a sandstone, 20x10x8 ins., firmly set and plainly mkd. $\frac{1}{4}$ on N. face.

At the cor. point

Dependent Resurvey of the Subdivision, T. 21 S., R. 23 E.

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with glass at base, and brass cap mkd.

T21S R23E

$\frac{1}{4}$ $\frac{S29}{S32}$

1964

Bury original stone cor. alongside iron post, and raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

N. $89^{\circ}57'$ W., beginning new measurement.

Desc. 30 ft. over W. slope.

- 1.90 Base of descent, bears N. and S.; thence over nearly level land.
- 19.40 Left bank of Nash Wash, bears NW. and SE.
- 30.00 Right bank of Nash Wash, 20 ft. high, bears NW. and SE.; asc. 20 ft. over NE. slope.
- 31.00 Fence, bears N. 16° W. and S. 16° E.
- 40.02 The cor. of secs. 29, 30, 31 and 32.

Land, rolling desert.
Soil, clay.
Undergrowth, shadscale.

N. $89^{\circ}59'$ W., bet. secs. 30 and 31.

Over rolling desert land through shadscale undergrowth. Asc. 40 ft. over NE. slope.

- 11.85 Trail road, on ridge, bears N. and S.; asc. 25 ft. over W. slope.
- 22.60 Wash, 20 lks. wide, 5 ft. deep, drains S.; asc. 40 ft. over SE. slope.
- 26.50 Maintenance road, bears NE. and SW.
- 27.10 Side track of Denver and Rio Grande Western Railroad.
- 28.51 Main track of Denver and Rio Grande Western Railroad, bears N. $51^{\circ}08'$ E. and S. $51^{\circ}08'$ W.
- 28.55 Telephone line, 24 wire, parallel to railroad.
- 39.10 Clay knoll; desc. 5 ft. over SW. slope.
- 40.07 The $\frac{1}{4}$ sec. cor. of secs. 30 and 31, monumented with a sandstone, $16 \times 10 \times 6$ ins., firmly set and plainly mkd. $\frac{1}{4}$ on N. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with glass at base, and in a collar of stone, with brass cap mkd.

CHAINS

T21S R23E

S30
~~S31~~

1964

Bury original stone cor. alongside iron post.

N. 89°58" W., beginning new measurement.

Desc. 40 ft. over SW. slope.

- 2.13 Cor. of fence, bears N. 1.00 ch. dist., with fence bearing N. 51° E. and W.
- 12.70 Wash, 1.00 ch. wide, 12 ft. deep, drains SE.; asc. 20 ft. over NE. slope.
- 19.10 Slope changes; asc. 35 ft. over SE. slope.
- 37.09 The cor. of secs. 30 and 31, on the W. bdy. of the Tp., monumented with an iron post, 2 ins. diam., set and mkd. as described in the official record.

Land, rolling desert.
Soil, clay.
Undergrowth, shadscale.

From the cor. of secs. 29, 30, 31 and 32.

N. 0°27' E., bet. secs. 29 and 30.

Over gently rolling desert land through shadscale undergrowth.

- 2.80 Wash, 10 lks. wide, 4 ft. deep, drains N. 80° E.
- 21.50 D&RGWRR maintenance road parallels railroad.
- 22.65 Denver and Rio Grande Western Railroad, bears S. 51°08' W. and N. 51°08' E.
- 23.40 Telephone line, 24 wire, parallel to railroad.
- 28.30 Fence, bears about S. 16° E. and N. 16° W. 40 lks. to cor., thence about S. 51° W.
- 40.14 Point for the ¼ sec. cor. of secs. 29 and 30 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T21S R23E

¼
S30|S29

1964

Raise a mound of stone, 3 ft. base, 1½ ft. high, W. of cor.

Continue over rolling desert land.

- 45.40 Nash Wash, 1.00 ch. wide, 6 ft. deep, drains SE.; asc. 65 ft. over SW. slope.

Dependent Resurvey of the Subdivision, T. 21 S., R. 23 E.

CHAINS	
63.20	Spur, slopes SW.; desc. 25 ft. over NW. slope.
68.25	Abandoned railroad grade, bears NE. and SW.
79.25	Point selected for the witness cor. of secs. 19, 20, 29 and 30.
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.
	<p style="text-align: center;">T21S R23E W C ↑ $\frac{S19}{S30} \frac{S20}{S29}$ 1964</p>
80.28	<p>Point for the cor. of secs. 19, 20, 29 and 30 at proportionate dist. falls in wash, 30 lks. wide, 8 ft. deep, and is not monumented. There is no remaining evidence of the original cor.</p> <p>Land, rolling desert. Soil, clay. Undergrowth, shadscale.</p>
	<p>From the cor. of secs. 20, 21, 28 and 29.</p> <p>N. 89°41' W., bet. secs. 20 and 29.</p> <p>Over rolling desert land through shadscale undergrowth. Asc. 25 ft. over gentle NE. slope.</p>
4.45	Improved gravel road, bears S. 21° E. and N. 21° W. curving NW.
28.45	Top of ascent, bears N. and S.; desc. 50 ft. over SW. slope.
40.07	Point for the ¼ sec. cor. of secs. 20 and 29 at proportionate dist.; there is no remaining evidence of the original cor.
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">T21S R23E $\frac{1}{4} \frac{S20}{S29}$ 1964</p>
	Raise a mound of stone, 3 ft. base, 1½ ft. high, N. of cor.
	Desc. 20 ft. over SW. slope.
44.80	Wash, 30 lks. wide, 8 ft. deep, drains S. 25° W.; asc. 10 ft. over SE. slope.
50.00	Low spur, slopes SW.; desc. 20 ft. over NW. slope.
55.00	Wash, 10 lks. wide, 4 ft. deep, drains S. 25° W.; asc. 10 ft. over SE. slope.
60.90	Low spur, slopes S.; desc. 20 ft. over SW. slope.
63.00	Abandoned railway grade, on curve, bears SE. and SW.

CHAINS

- 69.20 Wash, 30 lks. wide, 6 ft. deep, drains S.; asc. 10 ft. over E. slope.
- 76.80 Spur, slopes S.; desc. 10 ft. over W. slope.
- 79.90 Wash, 25 lks. wide, 6 ft. deep, drains SE.
- 80.14 True point for the cor. of secs. 19, 20, 29 and 30.

Land, rolling desert.
Soil, clay.
Undergrowth, shadscale.

N. 89°58' W., bet. secs. 19 and 30.

Over rolling desert land through shadscale undergrowth.
Asc. 45 ft. over NE. slope.

- 8.80 Ridge, bears NW. and SE.; desc. 50 ft. over SW. slope.
- 33.30 End descent, thence over nearly level land; enter greasewood undergrowth.
- 40.04 The $\frac{1}{4}$ sec. cor. of secs. 19 and 30, monumented with a redwood post, 4x4x18 ins. above ground, plainly mkd. $\frac{1}{4}$ S on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with glass at base, and brass cap mkd.

T21S R23E

$\frac{1}{4}$ $\frac{S19}{S30}$

1964

Bury original redwood cor. alongside iron post, and raise a mound of stone, 3 ft. base, 1 $\frac{1}{2}$ ft. high, N. of cor.

N. 89°54' W., beginning new measurement.

Continue over nearly level land.

- 7.05 Left bank of Nash Wash, 20 ft. high, bears N. 30° W. and S. 30° E.
- 10.35 Right bank of Nash Wash, bears N. 30° W. and S. 30° E.; asc. 45 ft. over NE. slope.
- 37.71 The cor. of secs. 19 and 30, on the W. bdy. of the Tp., monumented with an iron post, 2 ins. diam., set, mkd. and witnessed as described in the official record.

Land, rolling desert.
Soil, gravelly clay.
Undergrowth, shadscale and greasewood.

From the true point for the cor. of secs. 19, 20, 29 and 30.

N. 0°40' E., bet. secs. 19 and 20.

Dependent Resurvey of the Subdivision, T. 21 S., R. 23 E.

CHAINS

Over gently rolling desert land through shadscale undergrowth. Asc. 35 ft. along side of wash.

10.45 Wash, 30 lks. wide, 8 ft. deep, drains SW. from NE.

22.05 Same wash, drains SE. from NW.

40.14 The $\frac{1}{2}$ sec. cor. of secs. 19 and 20, monumented with a sandstone, 16x8x6 ins., firmly set and plainly mkd. $\frac{1}{4}$ S on W. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with glass at base, and brass cap mkd.

T21S R23E

$\frac{1}{4}$

S19|S20

1964

Bury original stone cor. alongside iron post, and raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

N. 0°29' W., beginning new measurement.

Asc. 65 ft. over SW. slope.

32.40 Improved gravel road, bears NW. and SE., thence over nearly level bench land.

39.94 The cor. of secs. 17, 18 19 and 20, monumented with a sandstone, 18x6x6 ins., firmly set and plainly mkd. 3 notches on S. and 5 on E. edges.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with glass at base, and brass cap mkd.

T21S R23E

$\frac{S18|S17}{S19|S20}$

1964

Bury original stone cor. alongside iron post, and raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

Land, gently rolling desert and bench land.

Soil, gravelly clay.

Undergrowth, shadscale.

From the cor. of secs. 16, 17, 20 and 21.

N. 89°49' W., bet. secs. 17 and 20.

Over gently rolling desert bench land through shadscale undergrowth.

Asc. 60 ft. over gently rolling NE. slope.

39.96 Point for the $\frac{1}{2}$ sec. cor. of secs. 17 and 20 at proportionate dist.; there is no remaining evidence of the original cor.

Dependent Resurvey of the S¹ Division T21S R23E

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with glass at base, and brass cap mkd.

T21S R23E

$$\frac{1}{4} \frac{S17}{S20}$$

1964

Raise a mound of stone, 3 ft. base, 1½ ft. high, N. of cor.

Asc. 10 ft. over gentle E. slope.

71.10 Wash, 15 lks. wide, 2 ft. deep, drains SE.; asc. 15 ft. over NE. slope.

79.92 The cor. of secs. 17, 18, 19 and 20.

Land, gently rolling desert bench land.
Soil, sandy clay.
Undergrowth, shadscale.

N. 89°43' W., bet. secs. 18 and 19.

Over gently rolling desert bench land through shadscale undergrowth. Asc. 20 ft. over gentle E. slope.

7.90 Improved gravel road, bears NW. and SE.

28.70 Ridge, bears N. and S.; desc. 30 ft. over SW. slope.

33.40 Wash, 15 lks. wide, 2 ft. deep, drains SW.

39.60 Wash, 10 lks. wide, 1 ft. deep, drains S.; asc. 15 ft. over SE. slope.

40.35 Point for the ¼ sec. cor. of secs. 18 and 19 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, with glass at base, and brass cap mkd.

T21S R23E

$$\frac{1}{4} \frac{S18}{S19}$$

1964

Raise a mound of stone, 3 ft. base, 1½ ft. high, N. of cor.

Asc. 15 ft. over SE. slope.

54.00 Spur, slopes SW.; desc. 55 ft. over NW. slope.

59.75 Wash, 25 lks. wide, 6 ft. deep, in draw, drains S. 20° W.; asc. 50 ft. over SE. slope.

64.00 Spur, slopes S.; desc. 35 ft. over W. slope.

68.00 Wash, 20 lks. wide, 3 ft. deep, in draw, drains SE.; asc. 25 ft. over E. slope.

Dependent Resurvey of the Subdivision, T. 21 S., R. 23 E.

CHAINS

69.00

Spur, slopes SE.; desc. 45 ft. over SW. slope.

78.07

The cor. of secs. 18 and 19, on the W. bdy. of the Tp., monumented with an iron post, 2 ins. diam., set, mkd. and witnessed as described in the official record.

Land, rolling desert and bench land.
Soil, gravelly clay.
Undergrowth, shadscale.

40.00

From the cor. of secs. 17, 18, 19 and 20.

N. 0°07' E., bet. secs. 17 and 18.

Over gently rolling desert bench land.

The ½ sec. cor. of secs. 17 and 18, monumented with a sandstone, 20x14x3 ins., firmly set and plainly mkd. ½S on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with glass at base, and brass cap mkd.

T21S R23E

½

S18|S17

1964

Bury original stone cor. alongside iron post, and raise a mound of stone, 3 ft. base, 1½ ft. high, W. of cor.

N. 0°10' E., beginning new measurement.

Continue over gently rolling bench land.

2.00

Trail road, bears E. and W.

20.00

Wash, 20 lks. wide, 10 ft. deep, drains E.

39.99

The cor. of secs. 7, 8, 17 and 18, monumented with a sandstone, 16x12x4 ins., firmly set and plainly mkd. 4 notches on S. and 5 on E. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with glass at base, and brass cap mkd.

T21S R23E

S7|S8
S18|S17

1964

Bury original stone cor. alongside iron post, and raise a mound of stone, 3 ft. base, 1½ ft. high, W. of cor.

Land, gently rolling desert and bench land.
Soil, clay.
Undergrowth, shadscale.

Dependent Resurvey of the Subdivision, T. 21 S., R. 23 E.

CHAINS

From the cor. of secs. 8, 9, 16 and 17.

S. 89°59' W., bet. secs. 8 and 17.

Over rolling desert land through shadscale undergrowth.
Asc. 55 ft. over gentle E. slope.

39.99 The 1/2 sec. cor. of secs. 8 and 17, monumented with a sand stone, 12x12x4 ins., firmly set and plainly mkd. 1/2 S on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with glass at base, and brass cap mkd.

T21S R23E

1/2 S8 / S17

1964

Bury original stone cor. alongside iron post, and raise a mound of stone, 3 ft. base, 1 1/2 ft. high, N. of cor.

N. 89°58' W., beginning new measurement.

Asc. 40 ft. over gently rolling NE. slope.

40.02 The cor. of secs. 7, 8, 17 and 18.

Land, gently rolling desert.

Soil, clay.

Undergrowth, shadscale.

N. 89°58' W., bet. secs. 7 and 18.

Over rolling desert land through shadscale undergrowth.
Asc. 30 ft. over NE. slope over series of clay spurs sloping NE.

1.00 Trail road, bears S. and N. about 7.00 chs. to small stock pond.

39.94 The 1/2 sec. cor. of secs. 7 and 18, monumented with a sand stone, 15x8x6 ins., firmly set and plainly mkd. 1/2 on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with glass at base, and brass cap mkd.

T21S R23E

1/2 S7 / S18

1964

Bury original stone cor. alongside iron post, and raise a mound of stone, 3 ft. base, 1 1/2 ft. high, N. of cor.

N. 89°57' W., beginning new measurement.

Dependent Resurvey of the Subdivision, T. 21 S., R. 23 E.

CHAINS

Asc. 20 ft. over NE. slope over series of clay spurs sloping NE.

9.50 Wash, 10 lks. wide, 2 ft. deep, drains NW.

37.32 The cor. of secs. 7 and 18, on the W. bdy. of the Tp., monumented with an iron post, 2 ins. diam., set, mkd. and witnessed as described in the official record.

Land, gently rolling desert.
Soil, clay.
Undergrowth, shadscale.

From the cor. of secs. 7, 8, 17 and 18.

N. 0°13' E., bet. secs. 7 and 8.

Over rolling desert land through shadscale undergrowth.
Desc. 10 ft. over N. slope.

7.00 Wash, 10 lks. wide, 3 ft. deep, drains NE.; small stock pond bears SW. about 2.50 chs. dist.; asc. 10 ft. over gentle SE. slope.

14.40 Spur, slopes NE.; desc. 25 ft. over NW. slope.

26.30 Wash, 20 lks. wide, 4 ft. deep, drains NE.; asc 20 ft. over SE. slope.

34.20 Spur, slopes NE.; desc. 20 ft. over NW. slope.

39.95 Wash, 10 lks. wide, 3 ft. deep, drains NE.

40.20 The 1/2 sec. cor. of secs. 7 and 8, monumented with a sandstone, 20x14x6 ins. firmly set and plainly mkd. 1/2 S on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.

T21S R23E

1/2

S7|S8

1964

Bury original stone cor. alongside iron post, and raise a mound of stone, 3 ft. base, 1 1/2 ft. high, W. of cor.

N. 0°05' E., beginning new measurement.

Asc. 15 ft. over SE. slope.

4.30 Spur, slopes NE.; desc. 35 ft. over NW. slope.

22.70 Cisco Wash, 1.50 lks. wide, 4 ft. deep, drains NE.; asc. 20 ft. over SE. slope.

32.00 Wash, 30 lks. wide, 6 ft. deep, drains S. 70° E.

39.96 The cor. of secs. 5, 6, 7 and 8, monumented with a sandstone, 18x12x10 ins. firmly set and plainly mkd. 5 notches on S. and E. edges.

Dependent Resurvey of the Subdivision, T. 21 S. R. 23 E.

CHAINS

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins. in the ground, and in a collar of stone, with brass cap mkd.

T21S R23E

$$\frac{S6|S5}{S7|S8}$$

1964

Bury original stone cor. alongside iron post, and raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

Land, rolling desert.

Soil, clay.

Undergrowth, shadscale.

From the cor. of secs. 4, 5, 8 and 9.

N. $89^{\circ}51'$ W., bet. secs. 5 and 8.

Over rolling desert land through shadscale undergrowth.

- 9.70 Left bank of wash, 12 ft. deep, drains SW.
- 13.20 Right bank of same wash, bears NE. and SW.
- 24.30 Base of ridge, bears N. and S.; asc. 80 ft. over E. slope.
- 38.00 Ridge, bears N. and S.
- 39.94 Point for the $\frac{1}{4}$ sec. cor. of secs. 5 and 8 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with glass at base, and brass cap mkd.

T21S R23E

$$\frac{\frac{1}{4} S5}{S8}$$

1964

Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.

Desc. 15 ft. over NW. slope.

- 53.70 Draw, drains SW.; asc. 10 ft. over SE. slope.
- 59.75 Spur, slopes S.; desc. 65 ft. over NW. slope.
- 79.88 The cor. of secs. 5; 6, 7 and 8.

Land, rolling desert.

Soil, clay.

Undergrowth, shadscale.

N. $89^{\circ}52'$ W., bet. secs. 6 and 7.

Over rolling desert land through shadscale undergrowth. Asc. 20 ft. over SE. slope.

Dependent Resurvey of the Subdivision, T. 21 S., R. 23 E.

CHAINS

- 4.60 Spur, slopes S.; desc. 25 ft. over SW. slope.
- 15.80 Wash, 10 lks. wide, 1 ft. deep, drains SE.; asc. 55 ft. over NE. slope.
- 40.17 The $\frac{1}{2}$ sec. cor. of secs. 6 and 7, monumented with a sandstone, 16x12x3 ins., firmly set and dimly mkd. $\frac{1}{4}$ on N. face.
- At the cor. point
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with glass at base, and brass cap mkd.
- T21S R23E
- $\frac{1}{4} \frac{S6}{S7}$
- 1964
- Bury original stone cor. alongside iron post, and raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.
-
- S. $89^{\circ}50'$ W., beginning new measurement.
- Asc. 35 ft. over gentle NE. slope.
- 37.28 The cor. of secs. 6 and 7, on the W. bdy. of the Tp., monumented with an iron post, 2 ins. diam., set, mkd. and witnessed as described in the official record.
- Land, rolling desert.
Soil, clay.
Undergrowth, shadscale.
-
- From the cor. of secs. 5, 6, 7 and 8.
- N. $0^{\circ}18'$ E., bet. secs. 5 and 6.
- Over rolling desert land through shadscale undergrowth.
Asc. 60 ft. to $\frac{1}{4}$ sec. cor.
- 33.25 Wash, 1.00 ch. wide, 10 ft. deep, drains W.
- 39.95 The $\frac{1}{2}$ sec. cor. of secs. 5 and 6, monumented with a sandstone, 16x10x8 ins., firmly set and plainly mkd. $\frac{1}{2}$ S on W. face.
- At the cor. point
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.
- T21S R23E
- $\frac{1}{2}$
- S6|S5
- 1964
- Bury original stone cor. alongside iron post, and raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
-

Dependent Resurvey of the Subdivision, T. 21 S., R. 23 E.

- CHAINS
- N. $0^{\circ}22'$ W., beginning new measurement.
- 1.30 Wash, 30 lks. wide, 5 ft. deep, drains W.; asc. 15 ft. over S. slope.
- 8.00 Spur, slopes W.; desc. 15 ft. over N. slope.
- 20.20 Wash, 20 lks. wide, 2 ft. deep, drains W.; asc. 10 ft. over S. slope.
- 24.00 Spur, slopes W.; desc. 55 ft. over N. slope.
- 39.75 The standard cor. of secs. 31 and 32, T. 20 S., R. 23 E., on the N. bdy. of the Tp., monumented with an iron post, 2 ins. diam., set, mkd. and witnessed as described in the official record. This cor. will also function as the cor. of secs. 5 and 6, and I remark to read

T20S R23E

S C

S31 | S32

S6 | S5

T21S

1964

1923

Land, rolling desert.
Soil, clay.
Undergrowth, shadscale.

The standard $\frac{1}{4}$ sec. cor. of sec. 32, T. 20 S., R. 23 E., on the N. bdy. of the Tp., monumented with an iron post, 1 in. diam., set, mkd. and witnessed as described in the official record, will also function as the N. $\frac{1}{4}$ sec. cor. of sec. 5, and I remark to read

T20S R23E

SC

 $\frac{1}{4}$ S32

S5

T21S

1964

1923

The standard $\frac{1}{4}$ sec. cor. of sec. 31, T. 20 S., R. 23 E., on the N. bdy. of the Tp., monumented with an iron post, 1 in. diam., set, mkd. and witnessed as described in the official record, will also function as the N. $\frac{1}{4}$ sec. cor. of sec. 6, and I remark to read

T20S R23E

SC

 $\frac{1}{4}$ S31

S6

T21S

1964

1923

General Description

CHAINS

Township 21 South, Range 23 East, is located around Cisco Utah, which is located in the northern portion of section 24. It is rolling desert land covered with shadscale undergrowth, with greasewood undergrowth in the bottom of Cisco Wash and Nash Wash. There is no timber in the township. The soil is clay, with sandy and gravelly clay in the western portion. The township is drained in a southeasterly direction by numerous washes. The elevation varies from 4,300 ft. above sea level in the southeast corner to 4,600 ft. above sea level in the northwest corner. The only habitations in the township is the town of Cisco. The only water in the township is an intermittent stream in Cisco Wash. There are inactive oil and gas wells scattered throughout the township. The Denver and Rio Grande Western Railroad and U. S. Highway 50 and 6, enter the township at the west boundary of section 31, and bear northeasterly through the township, leaving at the northeast corner of section 24. There are several unimproved roads throughout the township.

11



UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS

NAMES	CAPACITY
Ferral D. Reynolds	Notes, Chainman
H. Dennis Badger	Transitman
Robert LaVere Gleave	Front Chainman
Gerald W. Hochstrasser	Cornerman

CERTIFICATE OF SURVEY

I, Glen B. Hatch, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 21st day of September, 1962, I have dependently resurveyed the east boundary (Grand River Guide Meridian) and the subdivisional lines of Township 21 South, Range 23 East

of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

Salt Lake City, Utah
(Date)
March 1, 1965

(Date)

Glen B. Hatch
~~(Cadastral Surveyor)~~
Supervisory Cadastral Surveyor

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

SUBMITTED FOR APPROVAL
Date JUN 17 1966

BUREAU OF LAND MANAGEMENT,
Washington, D. C.

The foregoing field notes of the dependent resurvey of the east boundary (Grand River Guide Meridian) and the subdivisional lines of Township 21 South, Range 23 East

executed by Glen B. Hatch, Cadastral Surveyor (Supervisory) having been critically examined and found correct, are hereby approved.

AUG 5 1966
(Date)

E. S. Huntington
(Chief, Division of Engineering)

CERTIFICATE OF TRANSCRIPT

Utah, is a true copy of the original field notes.

Blank

Page

Blank

Page

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
DEPT. OF THE INTERIOR
BUREAU OF LAND MGMT

ORIGINAL

FIELD NOTES

NOV 23 AM 10 00 0

OF THE

SURVEY

OF THE

CLOSING LINES OF THE MEANDERS

OF THE

GREAT SALT LAKE

THROUGH

TPS. 4 AND 5 N., R. 9 W.

AND

TPS. 6 N., RS. 9, 10, AND 11 W.

Of the SALT LAKE Meridian,

In the State of UTAH

EXECUTED BY

GERALD W. HOCHSTRASSER SUPERVISORY CADASTRAL SURVEYOR

Under special instructions dated AUGUST 10, 19 66, which provided for the surveys
included under Group Number 490, approved AUGUST 11, 1966,
and assignment instructions dated AUGUST 12, 19 66.

Survey commenced AUGUST 22, 19 66

Survey completed OCTOBER 1, 19 66

INDEX DIAGRAM

Township _____, Range _____,

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

South Segment, through Tps. 4 and 5 N., R. 9 W., on pages 2 through 14.

North Segment, through Tps. 6 N., Rs. 9, 10 and 11 W., on pages 15 through 23.

Closing Lines of the Meanders of the Great Salt Lake

CHAINS

The following field notes represent the survey of the closing lines of the meanders of the Great Salt Lake as provided for by Public Law No. 89-441. In accordance with the Special Instructions, these closing lines are run by empirical methods, rather than on a precise gradient line. These lines are designated as the South Segment, which represents the closing of the meanders from the meander cor. of secs. 4 and 33, Ts. 3 and 4 N., R. 9 W., northerly through Tps. 4 and 5 N., R. 9 W. to the meander cor. of secs. 1 and 36, Tps. 5 and 6 N., R. 9 W., Salt Lake Meridian, and the North Segment, which represents the closing of the meanders from the meander cor. of secs. 8 and 9, T. 6 N., R. 9 W., southwesterly through Tps. 6 N., Rs. 9 and 10 W. to the North Right-of-Way line of the Southern Pacific Railroad, thence northwesterly along said right-of-way line through Tps. 6 N., Rs. 10 and 11 W. to an A. P. No. 2 in unsurveyed sec. 11, T. 6 N., R. 11 W., thence northerly to the meander cor. of secs. 3 and 34, Tps. 6 and 7 N., R. 11 W.

The closing lines are monumented with 2½ in. steel posts, treated with a special alkali resistant asphalt tar, at intervals of one half mile, and all angle points are monumented with the same, as is customary on grant boundaries. Geodetic positions and Utah State grid values (North Zone) have been computed to all angle points and meander corners from ties made to U.S.C.&G.S. triangulation station "North Lakeside," at Latitude 41° 06' 26.549" N., Longitude 112° 53' 09.694" W., X=1,618,053.08', Y=285,051.26'.

The survey was executed with Gurley transit #661733, constructed in accordance with the standard instrumental specifications of the Bureau of Land Management. The instrument was in good condition prior to the beginning of the survey and was maintained in proper adjustment throughout the progress of the survey. In order to obtain more complete accuracy, all angles of this survey were turned a minimum of three times direct and three times reversed.

Measurements of the closing lines were made with a narrow steel tape, 8 chains in length. The tape was tested by comparison to a one chain standard steel tape and found to be correct. All ties to U.S.C. & G.S. triangulation station "North Lakeside" were made by triangulation methods and the details of these triangulations have been thoroughly checked and verified.

The directions of the lines of this survey were determined by occupying U.S.C. & G.S. triangulation station "North Lakeside" using sustained angulation from the azimuth mark to various points along the survey. All bearings recorded in these field notes are mean true bearings.

South Segment of the Closing Line of the Meanders of the
Great Salt Lake

CHAINS

Beginning at the meander cor. of secs. 4 and 33, Tps. 3 and 4 N., R. 9 W., which is an iron post, 3 ins. diam., firmly set, with brass cap mkd.

T4N R9W

$$\frac{S33}{S4} \text{ MC}$$

T3N R9W

1912

I change the markings on this cor. to read:

T4N R9W

$$\frac{S33}{S4} \text{ MC}$$

T3N R9W

1966

1912

The geographic position of this cor. is at Latitude 41° 01' 48.28" N. and Longitude 112° 51' 22.75" W. The state grid coordinates of the cor. are X=1,625,799.2' and Y=256,763.4'.

Note: All bearings between angle points along this closing line are mean true bearings.

N. 35° 43' 41" E.

Over barren alkali flat.

40.00

Point for the one half mi. post.

Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground and in a mound of earth, 4 ft. base to brass cap mkd.

$$\frac{T4N}{S34} \text{ } \frac{1}{2} \text{ M}$$

R9W

1966

Deposit glass around the post.

45.20

Base of low, irregular bank, 3 to 5 ft. high, facing SE., bears NE. and SW., irregularly; continue over alkali flat along base of bank.

63.00

Bank bears SW. and NW., irregularly.

Point selected for angle point 1.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground with brass cap mkd.

$$\frac{T4N}{S34} \text{ API}$$

R9W

1966

South Segment of the Closing Line of the Meanders of the
Great Salt Lake

CHAIN

Deposit glass around the post.

The geographic position of this angle point is at
Latitude $41^{\circ} 02' 21.63''$ N. and Longitude $112^{\circ} 50' 51.07''$
W. The state grid coordinates of the angle point are
 $X=1,628,279.4'$ and $Y=260,100.7'$.

Thence N. $15^{\circ} 30' 27''$ E.

17.00 Point for the 1 mi. post.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in
the ground and in a mound of earth, 4 ft. base to brass
cap mkd.

T4N /
S34 / 1M
R9W /
1966

Deposit glass around the post.

57.00 Point for the $1\frac{1}{2}$ mi. post.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins.
in the ground and in a mound of earth, 4 ft. base to
brass cap mkd.

T4N /
S27 / $1\frac{1}{2}$ M
R9W /
1966

Deposit glass around the post.

97.00 Point for the 2 mi. post.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins.
in the ground and in a mound of earth, 4 ft. base to
brass cap mkd.

T4N /
S27 / 2M
R9W /
1966

Deposit glass around the post.

127.90 Point of spur about 150 ft. high, projecting E., bears
W. about 5.00 chs. dist.; at this point, the edge of the
alkali flat bears NW. and SW. irregularly. Point selected
for angle point 2.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 16 ins.
in the ground to bedrock and in a mound of earth and
stone, 5 ft. base to brass cap mkd.

T4N /
S22 / AP2
R9W /
1966

South Segment of the Closing Line of the Meanders of the
Great Salt Lake

CHAINS

Deposit glass around the post.

The geographic position of this angle point is at
Latitude $41^{\circ} 03' 42.01''$ N. and Longitude $112^{\circ} 50'$
 $21.61''$ W. The state grid coordinates of the angle
point are $X=1,630,661.6'$ and $Y=268,199.0'$.

Thence N. $20^{\circ} 25' 04''$ E.

Over barren alkali flat.

9.10 Point for the $2\frac{1}{2}$ mi. post.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins.
in the ground and in a mound of earth, 4 ft. base to
brass cap mkd.

T4N /
S22 / $2\frac{1}{2}$ M
R9W /
1966

Deposit glass around the post.

49.10 Point for the 3 mi. post.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins.
in the ground and in a mound of earth, 4 ft. base to
brass cap mkd.

T4N /
S23 / 3M
R9W /
1966

Deposit glass around the post.

89.10 Point for the $3\frac{1}{2}$ mi. post.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins.
in the ground and in a mound of earth, 4 ft. base to
brass cap mkd.

T4N /
S14 / $3\frac{1}{2}$ M
R9W /
1966

Deposit glass around the post.

129.10 Point for the 4 mi. post.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins.
in the ground and in a mound of earth, 4 ft. base to
brass cap mkd.

T4N /
S14 / 4M
R9W /
1966

Deposit glass around the post.

South Segment of the Closing Line of the Meanders of the
Great Salt Lake

CHAINS

146.20

Edge of alkali flat at point of low spur projecting E.;
edge of alkali flat bears NW. and SW. irregularly.

Point selected for angle point 3.

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins.
in the ground and in a mound of earth and stone, 4 ft.
base to brass cap mkd.

T4N /
S14 / AP3
R9W /

1966

Deposit glass around the post.

The geographic position of this angle point is at
Latitude 41° 05' 11.36" N. and Longitude 112° 49' 37.66"
W. and the state grid coordinates of the angle point are
X=1,634,166.5' and Y=277,189.0'.

From a point S. 19° 10' 50" W., 7.935 chs. dist. from
angle point 3, U.S.C. & G.S. triangulation station "North
Lakeside" bears N. 63° 13' 28" W., 272.59 chs. dist.

Thence N. 19° 10' 50" E.

Over barren alkali flat.

22.90

Point for the 4½ mi. post.

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins.
in the ground and in a mound of earth, 4 ft. base to
brass cap mkd.

T4N /
S11 / 4½M
R9W /

1966

Deposit glass around the post.

62.90

Point for the 5 mi. post.

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins.
in the ground and in a mound of earth, 4 ft. base to
brass cap mkd.

T4N /
S11 / 5M
R9W /

1966

Deposit glass around the post.

101.80

From this point, U.S.C. & G.S. triangulation station
"North Lakeside" bears N. 86° 04' 42" W., 280.03 chs.
dist.

South Segment of the Closing Line of the Meanders of the
Great Salt Lake

CHAINS

102.90

Point for the 5½ mi. post.

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground and in a mound of stone, 4 ft. base to brass cap mkd.

T5N
S36 / 5½M
R9W
1966

Deposit glass around the post.

142.90

Point for the 6 mi. post.

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground and in a mound of stone, 4 ft. base to brass cap mkd.

T5N
S36 / 6M
R9W
1966

Deposit glass around the post.

152.80

Edge of alkali flat at point of low spur projecting NE.; edge of alkali flat bears NW. and SW., irregularly.

Point selected for angle point 4.

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground and in a mound of earth, 4 ft. base to brass cap mkd.

T5N
S36 } AP4
R9W }
1966

Deposit glass around the post.

The geographic position of this angle point is at Latitude 41° 06' 45.48" N. and Longitude 112° 48' 54.38" W. The state grid coordinates of the angle point are X=1,637,623.8' and Y=286,662.7'.

Thence N. 24° 08' 04" W.

Over barren alkali flat.

30.10

Point for the 6½ mi. post.

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground and in a mound of earth, 4 ft. base to brass cap mkd.

T5N
S25 / 6½M
R9W
1966

Deposit glass around the post.

South Segment of the Closing Line of the Meanders of the
Great Salt Lake

CHAINS

70.10 Point for the 7 mi. post.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground and in a mound of earth, 4 ft. base to brass cap mkd.

T5N
S25 \ 7M
R9W
1966

Deposit glass around the post.

86.50 Rocky sand bar, projects NE.; alkali flat bears NW. and SW., irregularly.

Point selected for angle point 5.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground and in a mound of stone, 4 ft. base to brass cap mkd.

T5N
S25 \ AP5
R9W
1966

Deposit glass around the post.

The geographic position of this angle point is at Latitude $41^{\circ} 07' 36.96''$ N. and Longitude $112^{\circ} 49' 24.88''$ W. The state grid coordinates of the angle point are $X=1,635,369.3'$ and $Y=291,907.7'$.

Thence N. $9^{\circ} 45' 23''$ W.

Over barren alkali flat.

23.60 Point for the $7\frac{1}{2}$ mi. post.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground and in a mound of earth, 5 ft. base to brass cap mkd.

T5N
S24 \ $7\frac{1}{2}$ M
R9W
1966

Deposit glass around the post.

63.60 Point for the 8 mi. post.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground and in a mound of earth, 5 ft. base to brass cap mkd.

T5N
S24 \ 8M
R9W
1966

South Segment of the Closing Line of the Meanders of the
Great Salt Lake

CHAINS

- 100.50 Limestone reef at point of rocky spur about 200 ft. high projecting NE.; reef bears NW. and SW., irregularly.
- Point selected for angle point 6.
- Set an iron post, 30 ins. long, 2 ins. in solid limestone and in a mound of stone, 5 ft. base, to brass cap mkd.
- T5N /
S13 / AP6
R9W /
1966
- The geographic position of this angle point is at Latitude 41° 08' 41.55" N. and Longitude 112° 49' 39.57" W. The state grid coordinates of the angle point are X=1,634,344.6' and Y=298,461.1'.
- Thence N. 5° 30' 06" W.
- Over rocky limestone reef through scattered undergrowth of greasewood.
- 3.10 Point for the 8½ mi. post.
- Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground and in a mound of stone and earth, 5 ft. base to brass cap mkd.
- T5N /
S13 / 8½N
R9W /
1966
- Deposit glass around the post.
- 5.25 Leave greasewood, bears NW. and SE.; enter barren alkali flat.
- 43.10 Point for the 9 mi. post.
- Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground and in a mound of earth, 5 ft. base to brass cap mkd.
- T5N /
S13 / 9M
R9W /
1966
- Deposit glass around the post.
- 76.89 Base of bank about 15 ft. high at N. end of bay and neck of peninsula bearing NW. and SE.
- Point selected for angle point 7.
- Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground and in a mound of earth, 5 ft. base to brass cap mkd.

South Segment of the Closing Line of the Meanders of the
Great Salt Lake

CHAINS

T5N
S12
R9W
AP7
1966

Deposit glass around the post.

The geographic position of this angle point is at Latitude $41^{\circ} 09' 31.46''$ N. and Longitude $112^{\circ} 49' 45.93''$ W. and the Utah state grid coordinates of the angle point are $X=1,633,935.6'$ and $Y=303,519.3'$.

Note: In compliance with memorandum 9186 (713a) from the Washington Office, the meander of the above mentioned peninsula will be included in the closing line. Due to the extremely irregular shoreline of the peninsula, and in accordance with the special instructions, the portion of the closing line around the peninsula is determined by empirical methods, rather than by a precise gradient line.

Thence S. $34^{\circ} 22' 35''$ E.

Along irregular shoreline of peninsula.

6.21 Point for the $9\frac{1}{2}$ mi. post.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground and in a mound of earth, 5 ft. base to brass cap mkd.

$9\frac{1}{2}$ M
T5N
S12
R9W
1966

Deposit glass around the post.

38.38 Point selected for angle point 8.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground and in a mound of earth, 5 ft. base to brass cap mkd.

AP8
T5N
S13
R9W
1966

Deposit glass around the post.

The geographic position of this angle point is at Latitude $41^{\circ} 09' 10.80''$ N. and Longitude $112^{\circ} 49' 27.23''$ W. The Utah state grid coordinates of the angle point are $X=1,635,333.7'$ and $Y=301,406.9'$.

Thence S. $0^{\circ} 01' 33''$ E.

7.83 Point for the 10 mi. post.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground and in a mound of earth, 5 ft. base, to brass cap mkd.

South Segment of the Closing Line of the Meanders of the
Great Salt Lake

CHAINS

10M | T5N
 | S13
 | R9W
1966

Deposit glass around the post.

26.76

Point selected for angle point 9.

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground and in a mound of earth, 5 ft. base to brass cap mkd.

AP9 | T5N
 | S13
 | R9W
1966

Deposit glass around the post.

The geographic position of this angle point is at Latitude 41° 08' 53.35" N. and Longitude 112° 49' 27.22" W. The Utah state grid coordinates of the angle point are X=1,635,307.7' and Y=299,640.9'.

Thence S. 45° 24' 44" E.

21.07

Point for the 10½ mi. post.

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground and in a mound of earth, 5 ft. base to brass cap mkd.

10½M | T5N
 | S13
 | R9W
1966

Deposit glass around the post.

24.97

Point selected for angle point 10.

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground and in a mound of earth, 5 ft. base to brass cap mkd.

AP10 | T5N
 | S13
 | R9W
1966

Deposit glass around the post.

The geographic position of this angle point is at Latitude 41° 08' 41.92" N. and Longitude 112° 49' 11.88" W. The Utah state grid coordinates of the angle point are X=1,636,463.8' and Y=298,466.5'.

Thence S. 82° 51' 42" E..

21.10

SE. end of peninsula.

South Segment of the Closing Line of the Meanders of the
Great Salt Lake

CHAINS

Point selected for angle point 11.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground and in a mound of earth and stone, 5 ft. base to brass cap mkd.

T5N
S13
R9W
AP11

1966

Deposit glass around the post.

The geographic position of this angle point is at Latitude $41^{\circ} 08' 40.21''$ N. and Longitude $112^{\circ} 48' 53.82''$ W. The Utah state grid coordinates of the angle point are $X=1,637,842.9'$ and $Y=298,272.8'$.

Thence N. $36^{\circ} 24' 51''$ W.

15.00

Point for the 11 mi. post.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground and in a mound of earth and stone 5 ft. base to brass cap mkd.

T5N
S13
R9W
11M

1966

Deposit glass around the post.

40.20

Point selected for angle point 12.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground and in a mound of earth and stone, 5 ft. base to brass cap mkd.

T5N
S13
R9W
AP12

1966

Deposit glass around the post.

The geographic position of this angle point is at Latitude $41^{\circ} 09' 01.31''$ N. and Longitude $112^{\circ} 49' 14.41''$ W. The Utah state grid coordinates of the angle point are $X=1,636,299.9'$ and $Y=300,431.2'$.

Thence N. $16^{\circ} 07' 46''$ W.

14.80

Point for the $11\frac{1}{2}$ mi. post.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground and in a mound of earth and stone, 5 ft. base to brass cap mkd.

South Segment of the Closing Line of the Meanders of the
Great Salt Lake

CHAINS

T5N
S13 \ 11½M
R9W
1966

Deposit glass around the post.

18.70 Point selected for angle point 13.

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground and in a mound of earth and stone, 5 ft. base to brass cap mkd.

T5N
S13 \ AP13
R9W
1966

Deposit glass around the post.

The geographic position of this angle point is at Latitude 41° 09' 13.02" N. and Longitude 112° 49' 18.89" W. The Utah state grid coordinates of the angle point are X=1,635,975.7' and Y=301,622.1'.

Thence N. 34° 54' 48" W.

28.08 Point selected for angle point 14.

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground and in a mound of earth and stone, 5 ft. base to brass cap mkd.

T5N
S12 \ AP14
R9W
1966

Deposit glass around the post.

The geographic position of this angle point is at Latitude 41° 09' 28.04" N. and Longitude 112° 49' 32.76" W. The Utah state grid coordinates of the angle point are X=1,634,937.9' and Y=303,157.6'.

Thence N. 8° 02' 43" W.

8.02 Point for the 12 mi. post.

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground and in a mound of earth and stone, 5 ft. base to brass cap mkd.

T5N
S12 \ 12M
R9W
1966

Deposit glass around the post.

South Segment of the Closing Line of the Meanders of the
Great Salt Lake

CHAINS

19.13

Base of bank about 15 ft. high on N. side of neck of peninsula; bank bears S. 8° E. and N. 30° E.

Point selected for angle point 15.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 16 ins. in the ground and in a mound of earth and stone, 5 ft. base to brass cap mkd.

T5N
S12
R9W

AP15

1966

Deposit glass around the post.

The geographic position of this angle point is at Latitude $41^{\circ} 09' 40.39''$ N. and Longitude $112^{\circ} 49' 35.07''$ W. The Utah state grid coordinates of the angle point are $X=1,634,780.4'$ and $Y=304,410.3'$.

Thence N. $35^{\circ} 23' 31''$ E.

Over rocky alkali flat.

28.89

Point for the $12\frac{1}{2}$ mi. post.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 3 ins. in the ground to solid rock and in a mound of stone, 4 ft. base to brass cap mkd.

T5N
S12
R9W

12 $\frac{1}{2}$ M

1966

Deposit glass at base of post.

68.89

Point for the 13 mi. post.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 4 ins. in the ground to solid rock and in a mound of stone, 4 ft. base to brass cap mkd.

T5N
S12
R9W

13M

1966

Deposit glass at base of post.

74.14

Base of limestone ledge, $2\frac{1}{2}$ ft. high, bears N. $6^{\circ} 30'$ W., and SW., irregularly.

Point selected for angle point 16.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 2 ins. in the ground to solid rock and in a mound of stone, 4 ft. base to brass cap mkd.

T5N
S1
R9W

AP16

1966

South Segment of the Closing Line of the Meanders of the
Great Salt Lake

CHAINS

Deposit glass at base of post.

The geographic position of this angle point is at Latitude $41^{\circ} 10' 19.81''$ N. and Longitude $112^{\circ} 48' 58.01''$ W. The Utah state grid coordinates of the angle point are $X=1,637,674.4'$ and $Y=308,356.0'$.

Thence N. $6^{\circ} 38' 09''$ W.

Over irregular sandstone reef covered with blow sand and medium undergrowth of greasewood.

34.75 Point for the $13\frac{1}{2}$ mi. post.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 8 ins. in the ground and in a mound of stone, 4 ft. base to brass cap mkd.

T5N
S1
R9W
1966

13½M

Deposit glass at base of post.

74.75 Point for the 14 mi. post.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins. in the ground and in a mound of stone, 4 ft. base to brass cap mkd.

T5N
S1
R9W
1966

14M

Deposit glass at base of post.

79.91 True point for the meander cor. of secs. 1 and 36, Tps. 5 and 6 N., R. 9 W., not monumented.

From which, the witness meander cor. for this cor. bears west, 0.70 ch. dist., and is monumented with a 1 in. iron post, set, mkd. and witnessed as described in the official record of the 1928 survey.

The geographic position of the true point for this meander cor. is at Latitude $41^{\circ} 11' 11.57''$ N. and Longitude $112^{\circ} 49' 05.98''$ W. The Utah state grid coordinates of the true point for this cor. are $X=1,637,144.8'$ and $Y=313,603.4'$.

North Segment of the Closing Line of the Meanders of the
Great Salt Lake

CHAINS

Beginning at the meander cor. of secs. 8 and 9, T. 6 N.,
R. 9 W., which is a wood post, firmly set, and marked

T6NR9W on S.,
S9 on E.,
S8 on W., and
MC on N. face.

The geographic position of this cor. is at Latitude $41^{\circ} 15' 13.84''$ N., and Longitude $112^{\circ} 53' 14.89''$ W. The Utah state grid coordinates of the cor. are $X=1,618,507.4'$ and $Y=338,415.7'$.

Note: All bearings given in the survey of this closing line are mean true bearings.

S. $72^{\circ} 18' 56''$ W.

Over level sandbar through scattered undergrowth of greasewood and shadscale.

36.00 Leave sandbar and shadscale, bears N. and S. 1.00 ch., thence W.; enter alkali flat.

40.00 Point for the $\frac{1}{2}$ mi. post.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground and in a mound of earth, 4 ft. base to brass cap mkd.

$\frac{1}{2}M$

S8
T6N R9W
1966

Deposit glass around post.

72.00 End of sandbar, bears S. 2.00 chs. dist.

80.00 Point for the 1 mi. post.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground and in a mound of earth, 4 ft. base to brass cap mkd.

1M

S8
T6N R9W
1966

Deposit glass around post.

120.00 Point for the $1\frac{1}{2}$ mi. post.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground and in a mound of earth, 4 ft. base to brass cap mkd.

$1\frac{1}{2}M$

S7
T6N R9W
1966

North Segment of the Closing Line of the Meanders of
Great Salt Lake

CHAINS

160.00 Deposit glass around post.
Point for the 2 mi. post.
Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground and in a mound of earth, 4 ft. base to brass cap mkd.

$$\frac{2M}{S7}$$

T6N R9W

1966

167.97 Deposit glass around the post.
Intersect the cor. of secs. 7, 12, 13 and 18, T. 6 N., Rs. 9 and 10 W., in accordance with the special instructions.

This cor. is monumented with a wood post, set, mkd. and witnessed as described in the official record of the 1928 survey and will now function as the cor. of secs. 7, 13 and 18, T. 6 N., Rs. 9 and 10 W.

The monument is not in good condition, so I remove the wood post and at the exact cor. point, set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground with brass cap mkd.

$$\frac{S7}{S13 \quad S18}$$

T6N

R10W R9W

1966

200.00 Set original monument alongside and deposit glass around the post.

Point for the $2\frac{1}{2}$ mi. post.
Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground and in a mound of earth 4 ft. base to brass cap mkd.

$$\frac{2\frac{1}{2}M}{S13}$$

T6N R10W

1966

240.00 Deposit glass around the post.

Point for the 3 mi. post.
Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground and in a mound of earth 4 ft. base to brass cap mkd.

$$\frac{3M}{S13}$$

T6N R10W

1966

Deposit glass around the post.

North Segment of the Closing Line of the Meanders of the
Great Salt Lake

CHAINS	
280.00	<p>Point for the 3½ mi. post.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground and in a mound of earth 4 ft. base to brass cap mkd.</p> <p style="text-align: center;">3½M S14 T6N R10W 1966</p> <p>Deposit glass around the post.</p>
319.30	<p>Top of dike, about 6 ft. high, bears N. 79° 20' W. and S. 79° 20' E., parallel to Southern Pacific Railroad.</p>
319.49	<p>Intersect the N. right-of-way line of the Southern Pacific Railroad, determined by measuring 100 ft. dist. from the midpoint between the tracks and at a right angle to the track.</p> <p>Point for angle point 1.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground and in a mound of stone, 4 ft. base to brass cap mkd.</p> <p style="text-align: center;">API S14 T6N R10W 1966</p> <p>Deposit glass around the post.</p> <p>The geographic position of this angle point is at Latitude 41° 14' 10.55" N. and Longitude 112° 57' 47.88" W. The Utah state grid coordinates of the angle point are X 1,598,315.1' and Y 332,340.7'.</p> <p>Thence N. 79° 20' 35" W., along the N. right-of-way line of the Southern Pacific Railroad, in accordance with the special instructions.</p> <p>Note: This right-of-way line is determined by a direct sight between angle point 1 and a point, established in the same manner as angle point 1, approximately 6½ mi. W. of angle point 1.</p> <p>Over alkali flat along base of S. side of dike.</p>
.51	<p>Point for the 4 mi. post.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground and in a mound of stone, 3 ft. base to brass cap mkd.</p> <p style="text-align: center;">4M S14 T6N R10W 1966</p> <p>Deposit glass around the post.</p>

North Segment of the Closing Line of the Meanders of the
Great Salt Lake

CHAINS

From this mi. post, U.S.C. & G.S. triangulation station "North Lakeside" bears S. 23° 37' 29" E., 776.72 chs. dist.

40.51 Point for the 4½ mi. post.

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground and in a mound of stone, 3 ft. base to brass cap mkd.

4½M

S15
T6N R10W
1966

Deposit glass around post.

80.51 Point for the 5 mi. post.

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground and in a mound of stone, 2 ft. base to brass cap mkd.

5M

S15
T6N R10W
1966

Deposit glass around the post.

120.51 Point for the 5½ mi. post.

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground and in a mound of stone, 2 ft. base to brass cap mkd.

5½M

S16
T6N R10W
1966

Deposit glass around the post.

160.51 Point for the 6 mi. post.

Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground and in a mound of stone, 2 ft. base to brass cap mkd.

6M

S16
T6N R10W
1966

Deposit glass around the post.

North Segment of the Closing Line of the Meanders of the
Great Salt Lake

CHAINS

200.51 Point for the $6\frac{1}{2}$ mi. post.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground and in a mound of stone, 2 ft. base, to brass cap mkd.

$6\frac{1}{2}$ M
S17
T6N R10W
1966

Deposit glass around the post.

240.51 Point for the 7 mi. post.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground and in a mound of stone, 2 ft. base to brass cap mkd.

7M
S17
T6N R10W
1966

Deposit glass around the post.

265.30 Dike turns SW. about 50 lks., thence continues parallel to railroad tracks; continue along N. side of dike.

280.51 Point for the $7\frac{1}{2}$ mi. post.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground and in a mound of stone, 2 ft. base to brass cap mkd.

$7\frac{1}{2}$ M
S7
T6N R10W
1966

Deposit glass around the post.





320.51 Point for the 8 mi. post.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 22 ins. in the ground and in a mound of stone, 2 ft. base to brass cap mkd.

8M
S7
T6N R10W
1966

Deposit glass around the post.

North Segment of the Closing Line of the Meanders of the
Great Salt Lake

CHAINS	
360.51	<p>Point for the 8½ mi. post.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground and in a mound of stone, 2 ft. base to brass cap mkd.</p> <div style="text-align: center;">  <p>8½M S12 T6N R11W 1966</p> </div>
	Deposit glass around the post.
400.51	<p>Point for the 9 mi. post.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground and in a mound of stone, 2 ft. base to brass cap mkd.</p> <div style="text-align: center;">  <p>9M S12 T6N R11W 1966</p> </div>
	Deposit glass around the post.
440.51	<p>Point for the 9½ mi. post.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground and in a mound of stone, 2 ft. base to brass cap mkd.</p> <div style="text-align: center;">  <p>9½M S11 T6N R11W 1966</p> </div>
	Deposit glass around the post.
470.00	End of dike; continue over alkali flat.
480.51	<p>Point for the 10 mi. post.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground and in a mound of stone, 2 ft. base to brass cap mkd.</p> <div style="text-align: center;">  <p>10M S11 T6N R11W 1966</p> </div>
	Deposit glass around the post.

North Segment of the Closing Line of the Meanders of the
Great Salt Lake

CHAINS

499.51 Edge of alkali flat, bears N. and S.

Point selected for angle point 2.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground and in a mound of stone, 3 ft. base to brass cap mkd.

T6N / AP2
S11 /
R11W /

1966

Deposit glass around the post.

The geographic position of this angle point is at Latitude $41^{\circ} 15' 10.79''$ N. and Longitude $113^{\circ} 04' 42.01''$ W. The Utah state grid coordinates of this angle point are $X=1,566,027.0'$ and $Y=339,002.4'$.

From a point on the Southern Pacific Railroad right-of-way line, N. $79^{\circ} 20' 35''$ W., 11.06 chs. dist. from this angle point, U.S.C. & G.S. triangulation station "North Lakeside" bears S. $45^{\circ} 14' 59''$ E., 1,144.79 chs. dist.

Thence N. $1^{\circ} 55' 59''$ E.

Along broken edge of low bank.

7.00 Leave edge of bank; bears S. and NW., irregularly; enter alkali flat.

21.00 Point for the $10\frac{1}{2}$ mi. post.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 22 ins. in the ground and in a mound of earth, 3 ft. base to brass cap mkd.

T6N /
S11 / $10\frac{1}{2}M$
R11W /

1966

Deposit glass around the post.

61.00 Point for the 11 mi. post.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 22 ins. in the ground and in a mound of earth, 3 ft. base to brass cap mkd.

T6N /
S2 / 11M
R11W /

1966

Deposit glass around the post.

North Segment of the Closing Line of the Meanders of the
Great Salt Lake

CHAINS

101.00

Point for the 11½ mi. post.

Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins.
in the ground and in a mound of earth, 3 ft. base to
brass cap mkd.

T6N /
S2 / 11½M
R11W /
1966

Deposit glass around the post.

106.00

Point of low bank bearing NW. and SW., irregularly.

Point selected for angle point 3.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins.
in the ground with brass cap mkd.

T6N }
S2 } AP3
R11W }
1966

Deposit glass around the post.

The geographic position of this angle point is at
Latitude 41° 16' 19.88" N. and Longitude 113° 04' 38.92"
W. The Utah state grid coordinates of this angle point
are X=1,566,389.9' and Y=345,989.0'.

Thence N. 21° 48' 55" W.

Over alkali flat.

35.00

Point for the 12 mi. post.

Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins.
in the ground and in a mound of earth, 3 ft. base to
brass cap mkd.

T6N /
S3 / 12M
R11W /
1966

Deposit glass around the post.

48.39


The meander cor. of secs. 3 and 34, Tps. 6 and 7 N.,
R. 11 W., which is a pine post, badly deteriorated,
broken off level with the ground and conforming with
the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins.
in the ground with brass cap mkd.

North Segment of the Closing Line of the Meanders of the
Great Salt Lake

CHAINS



Deposit remains of original monument and glass around the post and set a firm post, 4 ft. long, 4 ins. square alongside.

The geographic position of this cor. is at Latitude $41^{\circ} 16' 49.17''$ N. and Longitude $113^{\circ} 04' 54.46''$ W. The Utah state grid coordinates of this cor. are $X=1,565,257.6'$ and $Y=348,975.3'$.

General Description

The closing lines herein described were run by empirical methods over nearly level land. Angle points were established at prominent points on the shoreline.

CHAINS

Blank

Page

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS

NAMES	CAPACITY
Clyde H. Lay	Transitman
H. Dennis Badger	Notes
Jerril E. Smith	Chainman
Stewart M. Campbell	Cornerman

CERTIFICATE OF SURVEY

I, Gerald W. Hochstrasser, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 10th day of August, 1966,

I have surveyed the closing lines of the meanders of the Great Salt Lake, described on page 1 of the field notes, designated as the South Segment which represents the line through Tps. 4 and 5 N., R. 9 W. and the North Segment which represents the line through T. 6 N., Rs. 9, 10 and 11 W.

of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by me and under my direction and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

October 31, 1966 (Date)

[Handwritten Signature] (Cadastral Surveyor) SUPERVISORY

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

SUBMITTED FOR APPROVAL Date NOV 10 1966

BUREAU OF LAND MANAGEMENT Washington, D. C.

The foregoing field notes of the survey of the closing line of the meanders of the Great Salt Lake, as described on page 1 of the field notes, designated as the South Segment which represents the line through Tps. 4 and 5 N., R. 9 W. and the North Segment which represents the line through T. 6 N., Rs. 9, 10 and 11 W., Salt Lake Meridian

executed by Gerald W. Hochstrasser having been critically examined and found correct, are hereby approved.

NOV 14 1966 (Date)

[Handwritten Signature] (Division of)

CERTIFICATE OF TRANSCRIPT

, is a true copy of the original field notes

(Date)

(Signature)

Blank

Page

Blank

Page

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
ORIGINAL

FIELD NOTES

OF THE

RESURVEY OF THE

SOUTH (SALT LAKE BASE LINE) AND THE WEST BOUNDARIES

AND THE

SUBDIVISIONAL LINES

OF

TOWNSHIP 1 NORTH, RANGE 24 EAST

RECEIVED
BUREAU OF LAND MANAGEMENT
SALT LAKE CITY
DEC 22 1962

Of the SALT LAKE Meridian,

In the State of UTAH

EXECUTED BY

FRED R. CHAPPELL SUPERVISORY CADASTRAL SURVEYOR

Under special instructions dated MAY 25, 19 62, which provided for the surveys

included under Group Number 456, approved JUNE 8, 1962,

and assignment instructions dated JUNE 8, 19 62.

Survey commenced JUNE 18, 19 64

Survey completed SEPTEMBER 24, 19 64

INDEX DIAGRAM

1 NORTH
Range
24 EAST

44	54	45	35	26	1
40	65	53	45	35	25
36	51	44	34	24	18
32	63	52	43	33	23
28	52	42	32	22	18
24	61	50	41	31	21
20	47	40	31	20	14
16	55	48	39	30	20
12	46	38	29	19	11
8	56	47	38	28	18
4	46	37	27	16	11
0	5	6	5	3	2

Township 1 North, Range 24 East

CHAINS

The north boundary was surveyed by A. Jessen in 1898, and was concurrently resurveyed by F. Chappell in 1963, under Group 456. The record appears in the field notes of T. 2 N., R. 24 E.; the east boundary was surveyed by A. D. Ferron in 1878, and the N. 2 miles were independently resurveyed by A. Jessen in 1898. The east boundary was concurrently resurveyed by F. Chappell in 1963, under Group 456, and the record appears in the field notes of T. 1 N., R. 25 E.; the south boundary (Salt Lake Base line), was surveyed by A. D. Ferron in 1878; the closing corners of the west 3 miles were established by A. D. Ferron in 1879; the closing corners of the east 3 miles were established by A. Jessen in 1898; the west boundary was surveyed by A. Jessen in 1898, and the west boundary of secs. 31, 7, and 6, were retraced by S. P. and J. R. Stewart in 1906; the section lines of secs. 13, 23, 24, 25, 26, 35, 36, $E\frac{1}{2}$ of line bet. secs. 22-27, and $E\frac{1}{2}$ of line bet. secs. 27-34, were surveyed by A. D. Ferron in 1878; the remainder of the subdivision was surveyed by A. Jessen in 1898.

The following field notes are those of the dependent re-survey of the south boundary (Salt Lake Base line), the west boundary, and the subdivisional lines of T. 1 N., R. 24 E.

Before restoring the corners, the lines of the original survey were retraced and a diligent search made for any evidence of the original corner, or other calls of the original field note record.

The rules of proportionate measurement were applied to ascertain the position of the lost corners, but not until exhausting every reasonable possibility of finding direct evidence for the control of each particular corner.

The survey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1947, and Special Instructions dated May 25, 1962.

The direction of the lines of the survey were determined by the solar transit method.

The lengths of all lines were determined by chaining where possible; otherwise by traverse or triangulation. The details of such traverses or triangulations have been thoroughly verified and in order to simplify the record, the diagrams and reductions are omitted from these field notes.

The geographic position of the southeast corner of the township is in latitude $40^{\circ} 46' 16.7''$ N. and longitude $109^{\circ} 08' 36.8''$ W., as determined from section line ties made to U.S.C. & G.S. triangulation station "UCOLWY" which is identical to the northeast corner of T. 1 N., R. 25 E., Utah.

The magnetic declination was read at a number of stations throughout the township and the average of these readings was found to be 16° E.

Dependent Resurvey of the Salt Lake Base Line,
S. Bdy., of T. 1 N., R. 24 E.

CHAINS

Dependent Resurvey of the Salt Lake Base Line,
S. Bdy., of T. 1 N., R. 24 E.

Reestablishment of the Survey
Executed by A. D. Ferron in 1878, With Restoration
of Closing Corners, and Establishment of $\frac{1}{2}$ Sec. Cors.
For T. 1 S., Rs. 24 and 25 E.

Beginning at the standard cor. of Tps. 1 N., Rs. 24 and
25 E., monumented with an iron post, 1 ins. diam., set,
mkd. and witnessed as described in the official record
of the concurrent resurvey of T. 1 N., R. 25 E.

S. $89^{\circ} 23'$ W., along the S. bdy. of sec. 36.

Over mountainous land, asc. 40 ft. over NE. slope,
through dense mahogany.

- 2.90 Top of ridge bears NE. and SW.; desc. 100 ft. over NW.
slope, through dense mahogany; thence by triangulation.
- 9.90 Head of draw, drains N.; asc. 90 ft. over NE. slope.
- 18.30 Top of rocky ridge, bears NW. and SE.; end of triangula-
tion; desc. 200 ft. over SW. slope.
- 32.46 Point for the N. $\frac{1}{2}$ sec. cor. of sec. 6, T. 1 S., R. 25
E., at proportionate distance.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins.
in the ground, and in a collar of stone to top, with
brass cap mkd.

$\frac{1}{2}$ S6
T1S R25E
1964

- 40.17 Point for the standard $\frac{1}{2}$ sec. cor. of sec. 36, at pro-
portionate distance; there is no remaining evidence of
the original corner.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 12 ins.
in the ground, and in a collar of stone to top, with
brass cap mkd.

SC
T1N R24E
 $\frac{1}{2}$ S36
1964

Desc. 320 ft. over SW. slope.


- 74.62 The closing cor. of secs. 1 and 6, T. 1 S., Rs. 24 and
25 E., monumented with a sandstone, 26x14x8 ins., firmly
set and mkd., as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 8 ins.
in the ground, and in a mound of stone, $3\frac{1}{2}$ ft. base to
top, with brass cap mkd.

Dependent Resurvey of the Salt Lake Base line,
S. bdy., of T. 1 N., R. 24 E.

CHAINS




Bury original stone cor. alongside iron post.

80.34

Point for the standard cor. of secs. 35 and 36, at proportionate distance; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.



1964

Raise a mound of stone, 3½ ft. base, 2 ft. high, N. of cor.

Land, mountainous.
Soil, rocky loam.
Timber, pinon and cedar.
Undergrowth, none.

S. 89° 23' W., along the S. bdy. of sec. 35.

Over gently rolling land, through thick sagebrush.

13.20

Road, unimproved dirt, bears about N. 45° W. and S. 45° E.

20.70

Enter grassy meadowland.


33.40

Road, unimproved dirt, bears about N. 45° E. and S. 45° W.

34.50

Point for the N. ¼ sec. cor. of sec. 1, T. 1 S., R. 24 E. at mid-point between closing cors. secs. 1 and 6, and secs. 1 and 2.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.



Raise a mound of stone, 3½ ft. base, 2 ft. high, S. of cor.

40.17

Point for the standard ¼ sec. cor. of sec. 35, at proportionate distance; there is no remaining evidence of the original cor.

Dependent Resurvey of the Salt Lake Base line,
S. bdy., of T. 1 N., R. 24 E.

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground, and in a collar of stone to top, with brass cap mkd.

SC
T1N R24E
 $\frac{1}{4}$ S35

1964

- 47.70 Wash, 24 lks. wide, 8 ft. deep, drains N. irregularly.
58.85 Road, unimproved dirt, bears N. and S.
69.70 Leave grassy meadowland; asc. 80 ft. over SE. slope.
74.72 The closing cor. of secs. 1 and 2, T. 1 S., R. 24 E., monumented with a sandstone, 20x12x5 ins., firmly set and mkd., as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 4 ins. in the ground, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

S2 | S1
CC
T1S R24E

1964

- Bury original stone cor. alongside iron post.
Asc. 120 ft. over SE. slope.
76.80 Enter scattered juniper and pinon.
80.34 The standard cor. of secs. 34 and 35, mkd. by a large cross (†) chiseled on top of a sandstone ledge, 25 ft. high, as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., on sandstone ledge, in a mound of stone, 4 ft. base to top, with brass cap mkd.

SC
T1N R24E
S34|S35

1964

Land, mountainous.
Soil, rocky loam.
Timber, scattered mahogany and pinon.
Undergrowth, sagebrush and grass.

Dependent Resurvey of the Salt Lake Base line,
S. bdy., of T. 1 N., R. 24 E.

CHAINS	
	<p>S 89° 22' W., along the S. bdy. of sec. 34.</p> <p>Over mountainous land; asc. 280 ft. along SE. slope, through scattered timber.</p>
10.10	<p>Top of rocky ridge, bears NE. and SW.; thence by triangulation; asc. 40 ft. along N. slope.</p>
34.32	<p>Point for the N. ¼ sec. cor. of sec. 2, T. 1 S., R. 24 E. at mid-point between closing cors. of secs. 1 and 2, and secs. 2 and 3; end of triangulation.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground, and in a collar of stone to top, with brass cap mkd.</p> <div style="text-align: center;"> <hr style="width: 100px; margin: 0 auto;"/> <p>¼ S2 T1S R24E 1964</p> </div>
39.91	<p>Point for the standard ¼ sec. cor. of sec. 34, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground, and in a mound of stone, 3½ ft. base to top, with brass cap mkd.</p> <div style="text-align: center;"> <p>SC T1N R24E ¼ S34</p> <hr style="width: 100px; margin: 0 auto;"/> <p>1964</p> </div>
	<p>Asc. 120 ft. along N. slope.</p>
74.26	<p>The closing cor. of secs. 2 and 3, T. 1 S., R. 24 E., monumented with a sandstone, 21x11x5 ins., firmly set and mkd. as described in the official record.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground, and in a mound of stone, 3½ ft. base to top, with brass cap mkd.</p> <div style="text-align: center;"> <p>S3 S2</p> <hr style="width: 100px; margin: 0 auto;"/> <p>CC T1S R24E 1964</p> </div>
	<p>Deposit the original cor. stone in the mound, alongside the iron post.</p>
76.00	<p>Barbed wire fence, bears NW. and SE.</p>
79.82	<p>Point for the standard cor. of secs. 33 and 34, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground, and in a mound of stone, 3½ ft. base to top, with brass cap mkd.</p>

Dependent Resurvey of the Salt Lake Base line,
S. bdy., of T. 1 N., R. 24 E.

CHAINS

SC
T1N R24E
S33 | S34

1964

Land, mountainous.
Soil, rocky loam.
Timber, scattered mahogany.
Undergrowth, sagebrush and grass.

S.89° 22' W., along the S. bdy. of sec. 33.

Over mountainous land, desc. 400 ft. over NW. slope,
through scattered mahogany.

5.80 Enter aspen grove, bears N. and S.

10.00 Leave aspen grove.

30.40 Leave scattered mahogany; enter canyon bottomland,
covered with sagebrush.

34.38 Point for the N. 1/4 sec. cor. of sec. 3, T. 1 S., R. 24 E.,
at mid-point between closing cors. of secs. 2 and 3, and
secs. 3 and 4.

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 4 ins.
in the ground, and in a mound of stone, 4 ft. base to
top, with brass cap mkd.

1/4 S3
T1S R24E
1964

39.91 Point for the standard 1/4 sec. cor. of sec. 33, at
proportionate distance; there is no remaining evidence
of the original cor.

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 18 ins.
in the ground, and in a collar of stone to top, with
brass cap mkd.

SC
T1N R24E
1/4 S33

1964

Over canyon bottomland, bears NE. and SW., covered with
sagebrush.

45.00 Road, unimproved dirt, bears about N. 45° E. and S.
45° W.

64.00 Asc. 120 ft. over SE. slope.

73.60 Top of ridge, bears N. and S.; desc. 40 ft. over NW.
slope; thence along an old fence line.

Dependent Resurvey of the Salt Lake Base line,
S. bdy., of T. 1 N., R. 24 E.

CHAINS										
74.33	<p>The closing cor. of secs. 3 and 4, T. 1 S., R. 24 E., monumented with a sandstone, 20x12x6 ins., firmly set and mkd., as described in the official record.</p> <p>At the cor. point</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 4 ins. in the ground, and in a mound of stone, 4 ft. base to top, with brass cap mkd.</p> <div style="text-align: center;"> <table border="0"> <tr> <td>S4</td> <td> </td> <td>S3</td> </tr> <tr> <td></td> <td></td> <td>CC</td> </tr> <tr> <td>T1S</td> <td></td> <td>R24E</td> </tr> </table> <p>1964</p> </div> <p>Bury original stone cor. alongside iron post.</p> <p>Desc. 80 ft. over NW. slope to standard cor.</p>	S4		S3			CC	T1S		R24E
S4		S3								
		CC								
T1S		R24E								
79.82	<p>The standard cor. of secs. 32 and 33, marked by the remains of an old fence cor. from the N. and E., it is accepted as the best available evidence of the position of the original cor.</p> <p>At the cor. point</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground, and in a mound of stone, 3½ ft. base to top, with brass cap mkd.</p> <div style="text-align: center;"> <table border="0"> <tr> <td></td> <td></td> <td>SC</td> </tr> <tr> <td>T1N</td> <td></td> <td>R24E</td> </tr> <tr> <td>S32</td> <td> </td> <td>S33</td> </tr> </table> <p>1964</p> </div> <p>Land, mountainous. Soil, rocky loam. Timber, mahogany and aspen. Undergrowth, sagebrush and grass.</p>			SC	T1N		R24E	S32		S33
		SC								
T1N		R24E								
S32		S33								
15.90	<p>S 89° 27' W., along the S. bdy. of sec. 32.</p> <p>Over mountainous land; desc. 40 ft. over NW. slope; enter canyon bottomland, bears N. and S., covered with thick sagebrush.</p>									
23.90	<p>East bank of dry pond, 8.00 chs. wide.</p> <p>West bank of dry pond; thence over nearly level land.</p>									
25.00	<p>Road, unimproved dirt, bears N. and S.</p>									
34.74	<p>Point for the N. ¼ sec. cor. of sec. 4, T. 1 S., R. 24 E., at mid-point between the closing cors. of secs. 3 and 4, and secs. 4 and 5.</p>									

Dependent Resurvey of the Salt Lake Base line,
S. bdy., of T. 1 N., R. 24 E.

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

$\frac{1}{2}$ S4
T1N R24E
1964

Raise a mound of stone, $3\frac{1}{2}$ ft. base, 2 ft. high, S. of cor.

40.11 Point for the standard $\frac{1}{4}$ sec. cor. of sec. 32, at proportionate distance; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

SC
T1N R24E
 $\frac{1}{4}$ S32

1964

Raise a mound of stone, $3\frac{1}{2}$ ft. base, 2 ft. high, N. of cor.

Asc. 40 ft. over gradual E. slope, through thick mahogany.

52.10 Base of rocky ridge bears N. and S.; thence by triangulation; asc. 400 ft. over steep E. slope.

67.20 Top of rocky ridge bears N. and S.; end of triangulation; desc. 80 ft. over SW. slope.

74.97 The closing cor. of sec. 4 and 5, T. 1 S., R. 24 E., monumented with a sandstone, 18x12x8 ins., firmly set and mkd., as described in the official record.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 4 ins. in the ground, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

S5 | S4
CC
T1S R24E
1964

75.10 Head of draw, drains S.; asc. 80 ft. over SE. slope, across a rock slide.

80.22 Point for the standard cor. of secs. 31 and 32, at proportionate distance; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., in a mound of stone, 4 ft. base to top, with brass cap mkd.

SC
T1N R24E
S31 | S32
1964

Dependent Resurvey of the Salt Lake Base line,
S. bdy., of T. 1 N., R. 24 E.

CHAINS

Land, mountainous.
Soil, 2nd rate and rocky.
Timber, mahogany.
Undergrowth, sagebrush and grass.

S. 89° 27' W., along the S. bdy. of sec. 31.

Over mountainous land; by triangulation; asc. 440 ft. over SE. slope, through scattered timber.

13.40 Top of mountain ridge, bears NE. and SW.; end of triangulation; thence along top.

18.40 Desc. 220 ft. over SW. slope, through thick mahogany.

34.54 Point for the N. ¼ sec. cor. of sec. 5, T. 1 S., R. 24 E., at mid-point between closing cors. of secs. 4 and 5, and secs. 5 and 6.

Set an iron post, 30 ins. long, 2½ ins. diam., 4 ins. in the ground, and in a mound of stone, 3½ ft. base to top, with brass cap mkd.

½ S5
T1S R24E
1964

40.11 Point for the standard ¼ sec. cor. of sec. 31, at proportionate distance; falls on the slope of a ledge and cannot be perpetuated; there is no remaining evidence of the original cor.

40.48 Point selected for the witness standard ¼ sec. cor. of sec. 31.

Set an iron post, 30 ins. long, 2½ ins. diam., on solid sandstone, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

SC
T1N R24E
½ S31 WC →
1964

Desc. 160 ft. over SW. slope.

45.10 Head of draw, drains SW.; asc. 320 ft. over steep SE. slope.

69.00 Top of ledge, 100 ft. high, bears NE. and SW., asc. 40 ft. over E. slope, through scattered pinon and cedar timber.

74.32 The closing cor. of secs. 5 and 6, T. 1 N., R. 24 E., monumented with a sandstone, 20x12x8 ins., firmly set and mkd., as described in the official record.

At the cor. point

Dependent Resurvey of the Salt Lake Base line,
S. bdy., of T. 1 N., R. 24 E.

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 4 ins. in the ground, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T1N R24E

S31

S6 | S5

CC

T1S R24E

1964

Bury original stone cor. alongside iron post.

76.00

Ridge bears S. 85° W. and N. 85° E., desc. 100 ft. over N. slope, through dense aspen timber.

80.22

The standard cor. of Tps. 1 N., Rs. 23 and 24 E., monumented with a sandstone, 18x10x8 ins., firmly set and mkd., as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins. in the ground, and in a mound of stone, $3\frac{1}{2}$ ft. base to top, with brass cap mkd.

SC

T1N

R23E R24E

S36 | S31

1964

Bury original stone cor. alongside iron post.

Land, mountainous.

Soil, 2nd rate and rocky.

Timber, thick aspen, scattered pinon and cedar.

Undergrowth, sagebrush and grass.

Dependent Resurvey of the W. bdy., T. 1 N., R. 24 E.

Reestablishment of the Survey Executed by
A. Jessen in 1898, and retraced by
S. P. and J. R. Stewart in 1906

From the standard cor. of Tps. 1 N., Rs. 23 and 24 E.

N. $0^{\circ} 15'$ W., between secs. 31 and 36.

Over mountainous land, by triangulation; desc. 300 ft. over NW. slope, through dense aspen timber.

20.00

Leave dense aspen timber; continue descent through thick sagebrush.

24.30

Draw, drains W.; asc. 200 ft. over SW. slope.

40.00


The $\frac{1}{4}$ sec. cor. of secs. 31 and 36, monumented with a sandstone, 15x10x5 ins., firmly set and mkd. $\frac{1}{4}$ on the W. face.; end of triangulation.

Dependent Resurvey of the W. bdy., T. 1 N., R. 24 E.

CHAINS

At the cor. point.

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground, and in a mound of stone, 4 ft. base to top, with brass cap mkd.



Bury the original cor. in the mound alongside the iron post.


N. 0° 15' W., beginning new measurement.

By triangulation; asc. 300 ft. over S. slope.

- 5.20 Ridge, projects SW; desc. 100 ft. over NW. slope.
- 17.20 Enter broken rocky cove, drains W.
- 40.00 The closing cor. of secs. 25 and 36, T. 1 N., R. 23 E., monumented with a sandstone, 14x12x4 ins., firmly set and mkd., as described in the official record; end of triangulation.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground, and in a mound of stone, 3½ ft. base to top, with brass cap mkd.




Bury original stone cor. alongside iron post.

Thence between secs. 25 and 31.

- 43.13 The cor. of secs. 30 and 31, on the E. bdy. of sec. 25, monumented with a sandstone, 16x6x5 ins., firmly set and mkd., as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.



Bury original stone cor. alongside iron post.

Dependent Resurvey of the W. bdy., T. 1 N., R. 24 E.

CHAINS

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Land, mountainous.

Soil, rocky loam.

Timber, aspen.

Undergrowth, sagebrush and grass.

Reestablishment of the Survey
Executed by A. Jessen, in 1898

N. $0^{\circ} 07'$ E., between secs. 25 and 30.

Over mountainous land, enter thick aspen grove.

11.36 Road, unimproved dirt, bears E. and W.

13.10 Dry spring, drains SW., asc. 200 Ft. over SE slope.

34.90 Leave thick aspen and pine.

38.10 Top of ridge, 300 ft. high, bears NE. and SW.; desc. NW. slope.

40.06 The $\frac{1}{2}$ sec. cor. for secs. 25 and 30, a stationary sandstone, $3\frac{1}{2} \times 3\frac{1}{2}$ ft. above ground, mkd. as described in the official record. There is no remaining evidence of the original bearing trees.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., on solid sandstone, in a mound of stone, $3\frac{1}{2}$ ft. base to top, with brass cap mkd.

T1N
R23E R24E
|
 $\frac{1}{2}$
|
S25 | S30
|
1964

N. $0^{\circ} 17'$ W., beginning new measurement.

By triangulation; desc. 500 ft. over NW. slope, through thick sagebrush.

39.74 The cor. for secs. 19, 24, 25 and 30, monumented with a sandstone, $20 \times 12 \times 6$ ins., firmly set and mkd., as described in the official record; end of triangulation.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T1N
R23E R24E
S24 | S19
S25 | S30
|
1964

Dependent Resurvey of the W. bdy., T. 1 N., R. 24 E.

CHAINS

Bury original stone cor. alongside iron post..

Raise a mound of stone, 4 ft. base, 2 ft. high, W. of cor.


Land, mountainous.
Soil, rocky loam.
Timber, aspen and pine..
Undergrowth, sagebrush and grass.

N. 0° 14' E., between secs. 19 and 24.

Over mountainous land, asc. 250 ft. over gradual SE. slope.

39.94 Point for the 1/4 sec. cor. of sec. 19, at proportionate distance; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 4 ins. in the ground, and in a mound of stone, 5 ft. base to top, with brass cap mkd.



Desc. 30 ft. over NW. slope.


57.90 Bottom of cove, drains SW.; asc. 50 ft. over SE. slope.

70.00 Top of ridge, bears SW. and NE.; thence along top, through scattered pine and aspen timber.

79.89 The cor. of secs. 13, 18, 19 and 24, monumented with a sandstone, 30x24x12 ins., firmly set and mkd., as described in the official record. There is no remaining evidence of the original bearing trees.

At the cor. point,

Set an iron post, 30 ins. long, 2 1/2 ins. diam., on solid sandstone, and in a mound of stone, 3 1/2 ft. base to top, with brass cap mkd.



Bury original stone cor. alongside iron post.

Land, mountainous.
Soil, rocky loam.
Timber, pine and aspen.
Undergrowth, scattered sagebrush and grass.

Dependent Resurvey of the W. bdy., T. 1 N., R. 24 E.

N. 27 27' W., between secs. 13 and 18.

Over mountainous land, desc. 200 ft. over N. slope, through scattered aspen and pine timber.

12.10 Leave aspen and pine timber.

12.11 The E. side cor. of secs. 13 and 18, monumented with a cast iron, 1 1/2" dia., firmly set and mkd., as described in the official record.

At the cor. point

Set a iron post, 30 ins. long, 2 1/2 ins. diam., 2 1/2 ins. in the ground, with brass cap mkd.

T1N
R23E R24E
+
+
S13 S18

1964

Bury rigid iron stake, alongside iron post.

Make a mound of stone, 3 1/2 ft. base, 2 ft. high, W. of cor.

N. 27 27' W., beginning new measurement.

12.12 Unimproved dirt road, bears E. and W.

12.13 Spring branch, drain SW.

12.14 Ascend 50 ft. along S. slope; enter thick mahogany.

12.15 Leave thick mahogany.

12.16 Point for the cor. of secs. 7, 12, 13 and 18, at approximate distance; there is no remaining evidence of the original cor.

Set a iron post, 30 ins. long, 2 1/2 ins. diam., 4 ins. in the ground, and in a mound of stone, 3 1/2 ft. base to top, with brass cap mkd.

T1N
R23E R24E
S12 S7
S13 S18

1964

Sec. 1, map 111, 112, 113.

12.17 Heavy team.

Timber, aspen, pine and mahogany.

Undergrowth, scattered sagebrush and grass.

Dependent Resurvey of the W. bdy., T. 1 N., R. 24 E.

CHAINS

Reestablishment of the Survey Executed by A. Jessen, in 1898, and retraced by S. P. and J. R. Stewart in 1906

N. 0° 50' W., between secs. 7 and 12.

Over mountainous land, by triangulation; desc. 425 ft. over NW. slope, through dense undergrowth.

40.38

The 1/4 sec. cor. of secs. 7 and 12, monumented with a sandstone, 24x20x3 ins., firmly set and mkd., as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., on solid sandstone, and in a mound of stone, 3 1/2 ft. base to top, with brass cap mkd.

T1N
R23E R24E

1/4

S12 | S7

1964

N. 0° 31' E., beginning new measurement.

18.00

Enter scrub pine and dense aspen.

24.30

Leave dense aspen and scrub pine.

31.67

Barbed wire fence, bears NE. and SW., along an old jeep road.

40.25

The cor. of secs. 1, 6, 7 and 12, monumented with a sandstone, 12x8x4 ins., firmly set and mkd., as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 18 ins. in the ground, and in a collar of stone, with brass cap mkd.

T1N
R23E R24E

S1 | S6

S12 | S7

1964

from which

SW. cor. of cabin bears N. 19° 33' E., 18.62 chs. dist.

Windmill bears N. 33° 48' E., 19.84 chs. dist.

Bury original stone cor. alongside iron post.

Dependent Resurvey of the W. bdy., T. 1 N., R. 24 E.

Land, mountainous.
Soil, rocky loam.
Timber, aspen and pine.
Undergrowth, sagebrush and grass.

N. 90° 30' W., along W. bdy. of sec. 6.

Over nearly level bottomland.

12.07 Graded road, bears N. 45° W., and S. 45° E.

17.75 Barbed wire fence, bears N. 45° W. and S. 45° E.

20.00 W. end of rocky spur, slopes SW.

40.55 The $\frac{1}{2}$ sec. cor. of secs. 1 and 6, monumented with a sandstone, 12x6x4 ins., firmly set and mkd., as describe in the official record.

At the cor. point

Set a iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T1N
R23E R24E
|
S1 | S6
1964

Bury original stone cor. alongside iron post.

N. 90° 32' W., beginning new measurement.

Over nearly level bottomland, through scattered sagebrush.

12.65 Barbed wire fence, bears NE. and SW.

18.25 Graded dirt road, bears NE. and SW.

40.25 The cor. of Tps. 1 and 2 N., Rs. 23 and 24 E., monumented with an iron post, 2 $\frac{1}{2}$ ins. in diam., marked and witness as described in the record of the 1963 resurvey of W. bdy. of T. 2 N., R. 24 E.

Land, nearly level bottomland.
Soil, rocky loam.
Timber, pine.
Undergrowth, sagebrush and grass.

Dependent resurvey of the Subdivision, T. 1 N., R. 24 E.

Reestablishment of the Survey
Executed by A. D. Ferron in 1878

From the standard cor. of secs. 35 and 36, on the S. bdy. of the Tp.

Dependent Resurvey of the Subdivision, T. 1 N., R. 24 E.

CHAINS

N. 0° 12' E., between secs. 35 and 36.

Over mountainous land; asc. 150 ft. along S. slope.

10.00 Top of rocky ridge, bears E. and W., desc. 80 ft. over NW. slope.

18.90 Bottom of draw, drains W.; asc. 120 ft. over SW. slope.

26.50 Top of rocky ledge, bears NW, and SE., desc. 280 ft. along N. slope.

38.86 The 1/2 sec. cor. of secs. 35 and 36, monumented with a sandstone, 3x3x1 ft., firmly set and mkd., as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 10 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T1N R24E

1/2

S35 | S36

1964

Deposit original stone cor. in mound of stone alongside iron post.

N. 0° 55' W., beginning new measurement.

Over gently rolling bottomland.

2.80 Unimproved dirt road, bears E. and W.

14.20 Wash, 12 lks. wide, 3 ft. deep, drains NW.

33.40 Enter thick juniper and pinon timber; asc. 160 ft. along S. slope.

41.42 The cor. of secs. 25, 26, 35 and 36, monumented with a sandstone, 18x16x6 ins., firmly set and mkd., as described in the official record, from which the original bearing trees:

A pine, 20 ins. diam., bears S. 85° E., 47 lks. dist., mkd. T1N R24E S36 BT.

A pine, 18 ins. diam., bears S. 19° W., 47 lks. dist., mkd. T1N R24E S35 BT.

A pine, 24 ins. diam., bears N. 30° W., 49 lks. dist., mkd. T1N R24E S26 BT.

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 6 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

Dependent Resurvey of the Subdivision, T. 1 N., R. 24 E.

CHAINS

T1N R24E

S26 | S25

S35 | S36

1964

Bury original stone cor. alongside iron post.

Land, mountainous.

Soil, rocky loam.

Timber, juniper and pinon.

Undergrowth, scattered sagebrush and grass.

From the cor. of secs. 25, 30, 31 and 36, on the E. bdy. of the Tp., monumented with an iron post, 2½ ins. diam., set, and mkd. as described in the record of the 1963 resurvey.

S. 89° 44' W., between secs. 25 and 36.

Over mountainous land; desc. 120 ft. over NW. slope, through thick mahogany.

- 8.00 Leave thick mahogany; enter Rye Grass Canyon bottomland, bears N. and S.
- 35.40 Wash, 12 lks. wide, 4 ft. deep, drains SW.
- 37.86 Unimproved dirt road, bears SW. and NE.
- 40.17 The ¼ sec. cor. of secs. 25 and 36, monumented with a sandstone, 12x8x2 ins., firmly set and mkd., as described in the official record.
- At the cor. point
- Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
- T1N R24E
 ¼ — S25
 S36
- 1964
- Bury original stone cor. alongside iron post.
- Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.
-
- S. 89° 31' W., beginning new measurement.
- Asc. 200 ft. over SE. slope.
- 13.40 Top of ledgy spur 300 ft. high, bears N. and S.; desc. 160 ft. over SW. slope, through thick juniper and pinon timber.
- 21.00 Leave thick juniper and pinon timber; thence across canyon bottom.

Dependent Resurvey of the Subdivision, T. 1 N., R. 24 E.

CHAINS					
25.40	Unimproved dirt road, bears N. 20° W. and S.				
33.20	Enter thick juniper and pinon timber; asc. 120 ft. over SE. slope.				
40.37	<p>The cor. of secs. 25, 26, 35 and 36.</p> <p>Land, mountainous. Soil, rocky loam. Timber, juniper, pinon and mahogany. Undergrowth, sagebrush and grass.</p>				
23.00	<p>N. 0° 10' E., between secs. 25 and 26.</p> <p>Over mountainous land by triangulation; asc. 200 ft. along S. slope, through thick juniper and pinon timber.</p> <p>Rocky ledge, bears NE, and SW.; asc. 280 ft. over SE. slope.</p>				
40.44	<p>Point for the ¼ sec. cor. of secs. 25 and 26, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., on solid sandstone, and in a mound of stone, 3½ ft. base to top, with brass cap mkd.</p> <div style="text-align: center;"> <p>T1N R24E</p> <p>¼</p> <table border="1" style="margin: auto;"> <tr> <td>S26</td> <td>S25</td> </tr> </table> <p>1964</p> </div> <p>Asc. 80 ft. over SE. slope, through thick mahogany.</p>	S26	S25		
S26	S25				
44.00	Top of ridge, 700 ft. high, bears NE. and SW.; desc. 600 ft. over steep NW. slope,				
66.40	Bottom of draw, drains W.; asc. 400 ft. over steep SW. slope.				
80.88	<p>Point for the cor. of secs. 23, 24, 25 and 26, at proportionate distance; there is no remaining evidence of original cor.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., on solid sandstone, and in a mound of stone, 3½ ft. base to top, with brass cap mkd.</p> <div style="text-align: center;"> <p>T1N R24E</p> <table border="1" style="margin: auto;"> <tr> <td>S23</td> <td>S24</td> </tr> <tr> <td>S26</td> <td>S25</td> </tr> </table> <p>1964</p> </div> <p>Land, mountainous. Soil, rocky loam. Timber, mahogany, juniper and pinon. Undergrowth, grass.</p>	S23	S24	S26	S25
S23	S24				
S26	S25				

Dependent Resurvey of the Subdivision, T. 1 N., R. 24 E.

From the cor. of secs. 19, 24, 25 and 30, on the E. bdy. of the Tp., monumented with an iron post, 2½ ins. diam., set and marked as described in the record of the 1963 resurvey.

S 89° 29' W., between sec. 24 and 25.

Over Rye Grass Canyon bottomland, through thick sagebrush.

- 2.10 Road, unimproved dirt, bears NE. and SW.
- 25.00 Unimproved dirt road, bears NW. and SE., and ends at 15.00 chs. to the NW.
- 30.00 Asc. 60 ft. over NE. slope.
- 35.28 Unimproved dirt road, bears NW. and SE., and ends at 20.00 chs. to the NW.
- 39.93 Point for the ¼ sec. cor. of secs. 24 and 25, at proportionate distance; there is no remaining evidence of the original cor.
- Set an iron post, 30 ins. long, 2½ ins. diam., 4 ins. in the ground, and in a mound of stone, 3½ ft. base to top, with brass cap mkd.

T1N R24E
 $\frac{S24}{\frac{1}{4} \quad S25}$

1964

Asc. 560 ft. over NE. slope, through thick mahogany.

- 58.00 Top of rocky ridge, bears NE. and SW; desc. 200 ft. over gradual SW. slope, through scattered mahogany.
- 79.56 The cor. of secs. 23, 24, 25 and 26.
- Land, mountainous.
 Soil, rocky loam.
 Timber, mahogany, juniper and pinon.
 Undergrowth, sagebrush and grass.

N. 0° 40' W., between secs. 23 and 24.

Over mountainous land, asc. 80 ft. over SW. slope.

- 8.00 Top of ridge, bears E. and W., desc. 640 ft. over NW. slope, through scattered mahogany.
- 38.50 Draw, drains W., asc. 60 ft. over S. slope.
- 40.00 The ¼ sec. cor. of secs. 23 and 24, monumented with a sandstone, 2½x10x2 ins., firmly set and mkd., as described in the official record.
- At the cor. point

Dependent Resurvey of the Subdivision, T. 1 N., R. 24 E.

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., on solid sandstone, and in a mound of stone, 3½ ft. base to top, with brass cap mkd.

T1N R24E

½

S23 | S24

1964

A quartzsite cone 30 ft. high, 30 ft. in diam., at base bears E., 35 lks dist.

Bury original stone cor. in the mound alongside iron post.

N. 1° 21' W., beginning new measurement.

Asc. 390 ft. over gradual SW. slope, through thick juniper and pinon timber.

40.08

The cor. of secs. 13, 14, 23 and 24, monumented with a sandstone, 30x20x5 ins., firmly set and mkd., as described in the official record, from which the remaining original bearing trees:

A pinon, 18 ins. diam., bears S. 45° E., 27 lks. dist., mkd. T1N R24E S24 BT.

A pinon, 15 ins. diam., bears S. 85° W., 19 lks. dist., mkd. T1N R24E S23 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground, and in a mound of stone, 3½ ft. base to top, with brass cap mkd.

T1N R24E

S14 | S13

S23 | S24

1964

Bury original stone cor. alongside iron post.

Land, mountainous.

Soil, rocky loam.

Timber, mahogany, juniper and pinon.

Undergrowth, sagebrush and grass.

From the cor. of secs. 13, 18, 19 and 24, on the E. bdy. of the Tp., monumented with an iron post, 2½ ins. diam., set and marked as described in the record of the 1963 resurvey.

S. 89° 54' W., between secs. 13 and 24.

Dependent Resurvey of the Subdivision, T. 1 N., R. 24 E.

CHAINS

Over mountainous land, asc. 640 ft. over steep NE. slope, through thick mahogany.

24.20 Leave thick mahogany; continue steep ascent.

36.60 Top of ridge, bears NW. and SE., desc. 30 ft. over SW. slope.

40.24 Point for the 1/4 sec. cor. of secs. 13 and 24, at proportionate distance; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 6 ins. in the ground, and in a mound of stone, 4 1/2 ft. base to top, with brass cap mkd.

T1N R24E

1/4 S13
S24

1964

Desc. 530 ft. over SW. slope, through thick mahogany, juniper and pinon.

80.48 The cor. of secs. 13, 14, 23 and 24.

Land, mountainous.
Soil, rocky loam.
Timber, mahogany, pinon and juniper.
Undergrowth, grass.

N. 0° 05' E., between secs. 13 and 14.

Over mountainous land; asc. 20 ft. over gradual SW. slope through thick juniper and pinon timber.

7.90 Thence along W. slope.

26.90 Rocky rim, bears E. and W.; desc. 300 ft. along N. slope.

39.66 The 1/4 sec. cor. of secs. 13 and 14, a stationary quartzite ledge, 3x2x2 ft. above ground, mkd. as described in the official record.

from which the original bearing trees:

A pine, 17 ins. in diam., bears N. 50° E., 65 lks. dist., mkd. 1/4 SBT.

A pine, 8 ins. in diam., bears N. 80° W., 90 lks. dist., mkd. 1/4 SBT.

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., on solid quartzite, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T1N R24E

1/4 S14 | S13

1964

Dependent Resurvey of the Subdivision, T. 1 N., R. 24 E.

CHAINS

N. 0° 36' W., beginning new measurement.

Desc. 160 ft. along N. slope, through thick juniper and pinon timber.

4.50 Draw, drains W.; asc. 80 ft. over SW. slope.

10.50 Thence along W. slope.

39.79 The cor. of secs. 11, 12, 13 and 14, a stationary sandstone, 10x6x2 ft., firmly set and mkd., as described in the official record, from which the original bearing trees:

A pinon, 8 ins. diam., bears S. 80° E., 5 lks. dist., mkd. T1N R24E S13 BT.

A pinon, 10 ins. diam., bears S. 20° W., 23 lks. dist., mkd. T1N R24E S14 BT.

A pinon, 12 ins. diam., bears N. 10° W., 18 lks. dist., mkd. T1N R24E S11 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., on solid sandstone, and in a mound of stone, 3½ ft. base to top, with brass cap mkd.

T1N R24E

S11	S12
-----	-----

S14	S13
-----	-----

1964

Land, mountainous.
Soil, rocky loam.
Timber, juniper and pinon.
Undergrowth, grass.

From the cor. of secs. 7, 12, 13 and 18, on the E. bdy. of the Tp., monumented with an iron post, 2½ ins. diam., set and marked as described in the record of the 1963 resurvey.

S. 89° 32' W., between secs. 12 and 13.

Over mountainous land; asc. 520 ft. over NE. slope, through mahogany, juniper and pinon timber.

39.63 The ¼ sec. cor. of secs. 12 and 13, monumented with a sandstone, 16x12x4 ins., firmly set and mkd. ¼ on the N. face. (Record calls for a charred pine post); no trace of the original bearing trees could be found.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground, and in a mound of stone, 5 ft. base to top, with brass cap mkd.

T1N R24E

¼	S12
	S13

1964

Dependent Resurvey of the Subdivision, T. 1 N. R. 24 E.

CHAINS

- Bury original stone cor. alongside iron post.
-
- West, beginning new measurement.
- Asc. 380 ft. over NE. slope, through thick mahogany.
- 17.00 Top of main ridge, bears N. and S.; thence along top, through scattered juniper and pinon.
- 26.50 Desc. 240 ft. along W. slope, through thick juniper and pinon.
- 40.09 The cor. of secs. 11, 12, 13 and 14.
- Land, mountainous.
Soil, rocky loam.
Timber, mahogany, juniper and pinon.
Undergrowth, grass.
-
- Reestablishment of the Survey
Executed by A. Jessen in 1898
- N. 0° 30' W., between secs. 11 and 12.
- Over mountainous land, asc. 240 ft. along S. slope, through thick juniper and pinon.
- 15.00 Top of ridge, bears E. and W.; desc. 660 ft. along N. slope, through thick juniper and pinon.
- 39.47 Point for the $\frac{1}{2}$ sec. cor. of secs. 11 and 12, at proportionate distance; there is no remaining evidence of the original cor.
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 4 ins. in the ground, and in a mound of stone, 4 ft. base to top, with brass cap mkd.
- T1N R24E
 $\frac{1}{2}$
S11|S12
1964
- Desc. 540 ft. along N. slope, through thick juniper and pinon.
- 67.00 Rocky ledge, bears E. and W.; desc. 260 ft. along steep N. slope, into Sears Creek.
- 71.50 Sears Creek, 5 lks. wide, 6 ins. deep, flows NE.; asc. 220 ft. along steep S. slope.
- 77.00 Top of rocky spur, bears E. and W.; desc. 40 ft. through thick juniper and pinon.
- 78.94 The cor. of secs. 1, 2, 11 and 12, monumented with a sandstone, 16x12x10 ins., firmly set and mkd., as described in the official record, from which the original bearing trees:

Dependent Resurvey of the Subdivision, T. 1 N., R. 24 E.

CHAINS

A cedar, 12 ins. diam., bears S. $41^{\circ} 15'$ W., 25 lks. dist., mkd. T1N R24E S11 BT.

A cedar, 12 ins. diam., bears S. $25^{\circ} 15'$ E., 77 lks. dist., mkd. T1N R24E S12 BT.

A cedar, 12 ins. diam., bears S. $10^{\circ} 45'$ W., 34 lks. dist., mkd. T1N R24E S1 BT.

A cedar, 12 ins. diam., bears N. $88^{\circ} 15'$ W., 45 lks. dist., mkd. T1N R24E S2 BT.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T1N R24E	
S2	S1
S11	S12

1964

Bury original stone cor. alongside iron post.

Land, mountainous.
Soil, rocky loam.
Timber, juniper and pinon.
Undergrowth, grass.

From the sec. cor. of secs. 1, 6, 7 and 12, on the E. bdy. of the Tp., monumented with an iron post, $2\frac{1}{2}$ ins. diam., set and marked as described in the record of the 1963 resurvey.

S. $88^{\circ} 12'$ W., between secs. 1 and 12.

Over mountainous land; asc. 320 ft. over NE. slope, through thick juniper and pinon.

36.47 The $\frac{1}{4}$ sec. cor. of secs. 1 and 12, monumented with a sandstone, 18x8x2 ins., firmly set and mkd., as described in the official record, from which the original bearing trees:

A pinon, 12 ins. diam., bears N. 6° W., 14 lks. dist., mkd. $\frac{1}{4}$ S1 BT.

A pinon, 14 ins. diam., bears S. $67^{\circ} 15'$ E., 30 lks. dist., mkd. $\frac{1}{4}$ S12 BT.

At the cor. point

Set an iron post, 30 ins. long $2\frac{1}{2}$ ins. diam., 4 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T1N R24E	
$\frac{1}{4}$ S1	
	S12

1964

Dependent Resurvey of the Subdivision, T. 1 N., R. 24

Along original stone cor. alongside iron post.

N. 45° 30' W., beginning new measurement.

Along top of broken plateau, through scattered juniper and piñon.

41.10 E. rim of Sears Canyon, bears NE. and SW.; desc. 80 ft.

41.11 bears creek, 3 lks. wide, 6 ins. deep, flows NE.; asc. 100 ft. to cor.

41.12 The cor. of secs. 1, 2, 11 and 12.

Lat. 1, 2, 11 and 12.
Soil, rocky loam.
Timber, juniper and piñon.
Undergrowth, grass.

N. 2° 30' W., between secs. 1 and 2.

On a small rocky ledge, desc. 80 ft. along N. rocky slope, through scattered juniper and piñon.

41.13 B. of steep descent, bears NW. and SE.; continue on a gradual descent.

41.14 The E. sec. cor. of secs. 1 and 2, mkd. by a large cross (+) chiseled on a sandstone ledge, as described in the official record, from which the original bearing trees:

A. piñon, 14 ins. diam., bears N. 17° 30' E., 18 lks. dist., mkd. S 1 BT.

A. piñon, 7 ins. diam., bears N. 70° W., 25 lks. dist., mkd. S 2 BT.

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., on sandstone ledge, in a mound of stone, 4 ft. base to top, with brass cap and nail.

TIN 8248

+

S 2 S 1

1965

N. 20° 15' E., beginning new measurement.

Over broken rocky plateau, through thick juniper and piñon.

41.15 Gully, 20 ft. deep, drains NE.

Dependent Resurvey of the Subdivision, T. 1 N., R. 24 E.

CHAINS

- 11.69 Old trail road, from Ashley to Brown's Park, bears NE. and SW.
- 20.70 Gulch, 50 ft. deep, drains NE.
- 39.97 The cor. of secs. 1 and 2, 35 and 36, on the N. bdy. of the Tp., monumented with an iron post, 2½ ins. diam., set and marked as described in the record of the 1963 resurvey.

Land, broken ridges.
Soil, rocky loam.
Timber, juniper and pinon.
Undergrowth, scattered grass.

Reestablishment of the Survey
Executed by A. D. Ferron in 1878.

- From the standard cor. of secs. 34 and 35, on the S. bdy. of the Tp.

N. 0° 15' W., between secs. 34 and 35.

Over mountainous land; asc. 40 ft. over SE. point of spur, through scattered mahogany.
- 5.00 Top of spur, bears NE. and SW.; desc. 160 ft. along N. slope of spur.
- 13.00 Leave mahogany; enter canyon bottom, covered with thick sagebrush and grass.
- 20.24 Barbed wire fence, 4 strands, bears E. and W.
- 30.00 Wagon Hollow, drains NE.
- 38.49 Road, unimproved dirt, bears SW. and NE.
- 40.35 The ½ sec. cor. of secs. 34 and 35, monumented with a sandstone, 18x9x4 ins., firmly set and mkd., as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T1N R24E
½
S34 | S35
1964

Raise a mound of stone 3 ft. base 2 ft. high, W. of cor.

Bury original stone cor. alongside iron post.

N. 0° 08' W., beginning new measurement.

Over canyon bottomland through scattered juniper and pinon; gradual ascent along S. slope.

Dependent Resurvey of the Subdivision, T. 1 N., R. 24 E.

CHAINS

- 16.50 Top of rocky spur, slopes E.; desc. 80 ft. over NE. slope.
- 24.60 Bottom of canyon, drains E.; asc. 80 ft. over SW. slope.
- 35.70 Top of spur, slopes NE.; desc. 60 ft. over NE. slope.
- 40.19 The cor. of secs. 26, 27, 34 and 35, monumented with a sandstone, 20x14x7 ins., firmly set and mkd., as described in the official record, from which the original bearing trees:

A cedar, 18 ins. diam., bears S. 25° 15' E., 77 lks. dist., mkd. T1N S35 BT.

A cedar, 16 ins. diam., bears S. 41° 15' W., 25 lks. dist., mkd. T1N S34 BT.

A cedar, 16 ins. diam., bears N. 88° 15' W., 45 lks. dist., mkd. T1N R24E S27 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T1N R24E	
S27	S26
S34	S35

1964

Bury original stone cor. alongside iron post.

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Land, mountainous.

Soil, rocky loam.

Timber, mahogany, juniper and pinon.

Undergrowth, sagebrush and grass.

- From the cor. of secs. 25, 26, 35 and 36.
- S. 89° 33' W. between secs. 26 and 35.
- Over mountainous land; asc. along S. slope of spur, through dense juniper and pinon timber.
- 5.80 Top of spur, projects SW.; desc. 280 ft. over NW. slope.
- 15.70 Leave thick juniper and pinon.
- 27.00 Wash, 4 ft. deep, 10 lks. wide, drains N. irregularly.
- 39.36 The ¼ sec. cor. of secs. 26 and 35, monumented with a sandstone, 24x8x6 ins., firmly set and mkd., as described in the official record.

At the cor. point

Dependent Resurvey of the Subdivision, T. 1 N., R. 24 E.

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone to top, with brass cap mkd.

T1N R24E
 ¼ $\frac{S26}{S35}$

1964

Bury original stone cor. alongside iron post.

S. 89° 48' W., beginning new measurement.

Over bottomland, through thick sagebrush and grass.

10.10 Unimproved dirt road, bears NE. and SW.

15.10 Wash, 8 ft. deep, 15 lks. wide, drains NE.

30.40 Graded dirt road, bears N. and S.

40.67 The cor. of secs. 26, 27, 34 and 35.

Land, bottomland.
 Soil, rocky loam.
 Timber, juniper and pinon.
 Undergrowth, sagebrush and grass.

N. 0° 01' W., between secs. 26 and 27.

Over gently rolling bottomland, through scattering cedar and mahogany.

19.24 Head of Sears Spring, in draw draining NE., bears N. 80° 05' E., 5.17 chs. dist.

31.00 Asc. rocky S. slope.

40.31 The ¼ sec. cor. of secs. 26 and 27, a marked stationary quartzite ledge, as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., on a solid quartzite ledge, in a mound of stone, 3½ ft. base to top, with brass cap mkd.

T1N R24E
 ¼ $\frac{S27}{S26}$

1964

N. 0° 45' E., beginning new measurement.

Asc. 160 ft. along S. slope of spur, through scattering sagebrush and grass.

Dependent Resurvey of the Subdivision, T. 1 N., R. 24 E.

CHAINS

- 5.90 Top of spur, projects E.; desc. 240 ft. along N. slope.
 27.00 Bottom of draw, drains SE.; asc. 300 ft. over SE. slope.
 39.62 Point for the cor. of secs. 22, 23, 26 and 27, at proportionate distance; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins. in the ground, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T1N R24E	
S22	S23
S27	S26

1964

Land, mountainous on N. 49.00 chs.
 Soil, rocky loam.
 Timber, cedar and mahogany.
 Undergrowth, sagebrush and grass.

From the cor. of secs. 23, 24, 25 and 26.

S $89^{\circ} 09'$ W., between secs. 23 and 26.

Over mountainous land; desc. 760 ft. over rocky SW. slope, to canyon bottom.

- 39.92 Point for the $\frac{1}{4}$ sec. cor. of secs. 23 and 26, at proportionate distance; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T1N R24E	
$\frac{1}{4}$ S23	
S26	

1964

Raise a mound of stone, $4\frac{1}{2}$ ft. base, 2 ft. high, N. of cor.

- 44.40 Sears Creek, 3 lks. wide, 12 ins. deep, flows N.

- 62.20 Old unimproved road, from Ashley to Brown's Park, bears N. and S.

- 64.68 Head of spring, bears N., 1.10 chs. dist., drains NE. into pond, 3.00 chs. dist.; asc. 460 ft. along E. slope.

- 79.84 The cor. of secs. 22, 23, 26 and 27.

Land, mountainous.
 Soil, rocky loam.
 Timber, none.
 Undergrowth, sagebrush and grass.

Dependent Resurvey of the Subdivision, T. 1 N., R. 24 E.

CRAINS


N. 0° 06' W., between secs. 22 and 23.

Over mountainous land; desc. 280 ft. over NE. slope, through thick mahogany.

39.62

Point for the 1/4 sec. cor. of secs. 22 and 23, at proportionate distance; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 12 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.




Asc. 200 ft. over gradual SE. slope, through scattered mahogany.

79.24

Point for the cor. of secs. 14, 15, 22 and 23, at proportionate distance; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 8 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.



Land, mountainous.
 Soil, rocky loam.
 Timber, mahogany.
 Undergrowth, scattered sagebrush and grass.

From the cor. of secs. 13, 14, 23 and 24.


S. 88° 15' W., between secs. 14 and 23.

Over mountainous land; desc. 430 ft. over SW. changing to W., through dense juniper and pinon.

39.38

Point for the 1/4 sec. cor. of secs. 14 and 23, at proportionate distance; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 12 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.



Cor. situated on E. rim of Sears Canyon, bears N. and S.; desc. 400 ft. along steep, rocky W. slope.

Dependent Resurvey of the Subdivision, T. 1 N., R. 24 E.

CHAINS

- 48.40 Sears Creek, 5 lks. wide, 6 ins. deep, flows N.
- 51.86 Old unimproved road, from Ashley to Brown's Park, bears N. and S.
- 53.90 Asc. 400 ft. along E. slope.
- 64.40 W. rim of Sears Canyon, bears N. and S.; asc. 160 ft. to the cor.
- 78.76 The cor. of secs. 14, 15, 22 and 23.

Land, mountainous.
Soil, rocky loam.
Timber, juniper and pinon.
Undergrowth, grass.

Reestablishment of the Survey Executed
by A. Jessen in 1898.


N. 0° 18' E., between secs. 14 and 15.

Over mountainous land; asc. 240 ft. over gradual SE. slope, through thick mahogany.

- 39.62 The $\frac{1}{2}$ sec. cor. of secs. 14 and 15, monumented with a sandstone, 18x10x6 ins., firmly set and mkd., as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.



Bury original stone cor. alongside iron post.

N. 0° 18' E., beginning new measurement.

Asc. 120 ft. over gradual SE. slope, through thick mahogany.

- 38.20 Top of ridge, bears NE. and SW.; desc. along N. slope to the sec. cor.

- 40.21 The cor. of secs. 10, 11, 14 and 15, monumented with a quartzite, 20x10x8 ins., firmly set and mkd., as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 12 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

Dependent Resurvey of the Subdivision, T. 1 N., R. 24 E.

CHAINS

T1N R24E
 S10 | S11
 S15 | S14

1964

Bury original stone cor. alongside iron post.

Land, mountainous.
 Soil, rocky loam.
 Timber, mahogany.
 Undergrowth, grass.

From the cor. of secs. 11, 12, 13 and 14.

S. $86^{\circ} 44'$ W., between secs. 11 and 14.

Over mountainous land; desc. 20 ft. along W. slope, through dense timber.

3.00 Head of draw, drains S. asc. 160 ft. over SE. slope.

11.50 Spur, projects SW.; desc. 200 ft. over W. slope.

31.30 E. rim of Sears Canyon; desc. 400 ft. over series of ledges facing W.

38.74 The $\frac{1}{2}$ sec. cor. of secs. 11 and 14, mkd. by a large cross (+) chiseled on a sandstone ledge, as described in the official record, from which the original bearing trees:

A pine, 6 ins. diam., bears S. $9^{\circ} 30'$ W., 66 lks. dist., mkd. $\frac{1}{2}$ S14 BT.

A pine, 8 ins. diam., bears N. 12° W., 39 lks. dist., mkd. $\frac{1}{2}$ S11 BT.

The above cor. is on the steep W. slope of a ledge, where an iron post cannot be set.

N. $89^{\circ} 45'$ W., beginning new measurement.

0.06 Point selected for the witness $\frac{1}{2}$ sec. cor. of secs. 11 and 14.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., on a sandstone ledge, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T1N R24E
 S11 → W
 $\frac{1}{2}$ S14 → C

1964

Desc. 320 ft. over a broken W. slope, into Sears Canyon.

7.50 Old unimproved road, from Ashley to Brown's Park, bears N. and S.

Dependent Resurvey of the Subdivision, T. 1 N., R. 24 E.

CHAINS

- 8.30 Sears Creek, 4 lks. wide, 4 ins. deep, flows N.
- 9.00 Asc. 800 ft. along steep E. slope.
- 23.90 W. rim of Sears Canyon; continue ascent over E. slope, 480 ft. to the sec. cor.
- 39.19 The cor. of secs. 10, 11, 14 and 15.
- Land, mountainous.
Soil, rocky loam.
Timber, scattered cedar and pine.
Undergrowth, scattered bunches of grass.
-
- N. 0° 32' W., between secs. 10 and 11.
- Over mountainous land; desc. 360 ft. along N. slope, through thick mahogany, juniper and pinon.
- 42.84 The $\frac{1}{2}$ sec. cor. of secs. 10 and 11, monumented with a sandstone, 14x6x4 ins., firmly set and mkd., as described in the official record, from which the original bearing trees:
- A pine, 5 ins. diam., bears S. 7° 15' E., 38 lks. dist., mkd. $\frac{1}{2}$ S11 BT.
- A mahogany, 5 ins. diam., bears W., 50 lks. dist., mkd. $\frac{1}{2}$ S10 BT.
- At the cor. point
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 5 ins. in the ground, and in a mound of stone, $3\frac{1}{2}$ ft. base to top, with brass cap mkd.
- T1N R24E
 $\frac{1}{2}$
S10 | S11
1964
- Bury original stone cor. alongside iron post.
-
- N. 0° 32' W., beginning new measurement.
- Desc. 800 ft. over NE. slope, through juniper and pinon.
- 37.68 The cor. of secs. 2, 3, 10 and 11, monumented with a sandstone, 18x10x6 ins., firmly set and mkd., as described in the official record, from which the original bearing trees:
- A pine, 6 ins. diam., bears S. 18° 15' E., 84 lks. dist., mkd. T1N R24E S11 BT.
- A pine, 5 ins. diam., bears N. 69° 15' W., 30 lks. dist., mkd. T1N R24E S3 BT.

Dependent Resurvey of the Subdivision, T. 1 N., R. 24 E.

CHAINS

At the cor. point.

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T1N R24E
S3 | S2
 S10 | S11

1964

Bury original stone cor. alongside iron post.

Land, mountainous.

Soil, rocky loam.

Timber, mahogany, juniper and pinon.

Undergrowth, scattered bunches of grass.

From the cor. of secs. 1, 2, 11 and 12.

S. 89° 37' W., between secs. 2 and 11.

Over mountainous land; asc. 120 ft. along E. slope of spur, through juniper and pinon timber.

13.00 Top of rise desc. 30 ft. over NW. slope.

22.25 Old road from Ashley to Brown's Park, bears N. and S., desc. 100 ft. over NW. slope.

35.00 Draw, drains N., asc. 40 ft. over E. slope.

37.74 The ¼ sec. cor. of secs. 2 and 11, monumented with a sandstone, 16x8x6 ins., firmly set and mkd., as described in the official record, from which the original bearing trees:

A cedar, 10 ins. diam., bears N. 26° W., 30 lks. dist., mkd. ¼ S2 BT.

A cedar, 10 ins. diam., bears S. 22° W., 22 lks. dist., mkd. ¼ S11 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone to top, with brass cap mkd.

T1N R24E
 S2
 ¼ S11

1964

Bury original stone cor. alongside iron post.

S. 89° 57' W., beginning new measurement.

Dependent Resurvey of the Subdivision, T. 1 N., R. 24 E.

CHAINS

- Asc. 320 ft. over gradual NE. slope, through thick juniper and pinon timber.
- 39.97 The cor. of secs. 2, 3, 10 and 11.
- Land, mountainous.
Soil, rocky clay.
Timber, juniper and pinon.
Undergrowth, scattered bunches of grass.
-
- N. 5° 54' W., between secs. 2 and 3.
- Over mountainous land; desc. 160 ft. over NE. slope, through thick juniper and pinon timber.
- 7.00 Bottom of draw, drains NE.; asc. 80 ft. over SE. slope; thence along rocky ridge.
- 19.30 Top of rocky spur, projects E.; desc. 160 ft. over NE. slope.
- 42.06 The $\frac{1}{4}$ sec. cor. of secs. 2 and 3, mkd. by a large cross (+) chiseled on a sandstone ledge, as described in the official record, from which the original bearing trees:
- A pinon, 8 ins. diam., bears N. 52° E., 37 lks. dist., mkd. $\frac{1}{4}$ S2 BT.
- A pinon, 12 ins. diam., bears N. 21° W., 14 lks. dist., mkd. $\frac{1}{4}$ S3 BT.
- At the cor. point
- Set an iron post, 30 ins. long, 2½ ins. diam., on solid sandstone, in a mound of stone, 3 ft. base to top, with brass cap mkd.
- T1N R24E

$\frac{1}{4}$

S3 | S2

 1964
-
- N. 1° 12' E., beginning new measurement.
- Asc. 40 ft. over SE. slope, through scattering juniper and pinon.
- 4.50 Spur projects NE.; desc. 330 ft. over NW. slope.
- 27.00 Draw, drains NE.
- 39.60 The cor. of secs. 2, 3, 34 and 35, on the N. bdy. of the Tp., monumented with an iron post, 2½ ins. diam., set and marked as described in the record of the 1963 resurvey.

Dependent Resurvey of the Subdivision, T. 1 N., R. 24 E.

CHAINS

Land, Mountainous.
Soil, rocky clay.
Timber, juniper and pinon.
Undergrowth, thick patches of grass.

From the standard cor. of secs. 33 and 34, on the S. bdy. of the Tp.


N. 0° 54' E., between secs. 33 and 34.

Over mountainous land; desc. 160 ft. along N. slope, through thick mahogany.

- 6.30 Barbed wire fence, 3 strands, bears SE. and N. 15.00 chs. to end.
- 12.10 Jeep road, in saddle bears E. and W.; asc. 200 ft. along rocky S. slope.
- 22.30 Top of ridge, bears NE. and SW.; thence along W. slope to the 1/2 sec. cor.
- 40.47 The 1/2 sec. cor. of secs. 33 and 34, monumented with a sandstone, 20x8x6 ins., firmly set and mkd., as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 12 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.



Bury original stone cor. alongside iron post.

N. 0° 40' W., beginning new measurement.

Descend along gentle W. slope.

- 24.30 Jeep road, bears NE. and SW.
- 25.00 Bottom of saddle, bears E. and W.; desc. 80 ft. over NE. slope, through thick sagebrush and grass.
- 40.12 The cor. of secs. 27, 28, 33 and 34, monumented with a sandstone, 18x10x8 ins., firmly set and mkd., as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, and in a collar of stone to top, with brass cap mkd.

Dependent Resurvey of the Subdivision, T. 1 N., R. 24

CHAINS

T1N R24E	
S28	S27
S33	S34

1964

Bury original stone cor. alongside iron post.

Land, mountainous.

Soil, rocky loam.

Timber, mahogany.

Undergrowth, sagebrush and grass.

From the cor. of secs. 26, 27, 34 and 35.

S 89° 25' W., between secs. 27 and 34.

Over mountainous land; asc. 240 ft. over NE. slope, through thick mahogany.

34.50 Draw, drains NE., asc. 240 ft. over SE. slope.

39.81 Point for the $\frac{1}{4}$ sec. cor. of secs. 27 and 34, at proportionate distance; there is no remaining evidence of the original cor.Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 4 ins. in the ground, and in a mound of stone, 3 $\frac{1}{2}$ ft. base to top, with brass cap mkd.

T1N R24E	
$\frac{1}{4}$	S27
	S34

1964

Asc. 310 ft. over SE. slope, through thick mahogany.

50.30 Top of ridge, bears N. and S.; desc. 350 ft. over SW. slope, through thick sagebrush.

79.62 The cor. of secs. 27, 28, 33 and 34.

Land, mountainous.

Soil, rocky loam.

Timber, mahogany.

Undergrowth, sagebrush and grass.

N. 0° 03' W., between secs. 27 and 28.

Over mountainous land; desc. 120 ft. over NE. slope, through thick sagebrush and scattered mahogany.

17.20 Jeep road, bears NW. and SE.

20.00 Dry pond, bears E., 1.00 ch. dist.; asc. 240 ft. over SE. slope, through thick sagebrush.

39.90 The $\frac{1}{4}$ sec. cor. of secs. 27 and 28, monumented with a sandstone, 18x16x4 ins., firmly set and mkd., as described in the official record.

Dependent Resurvey of the Subdivision, T. 1 N., R. 24 E.

CHAINS

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T1N R24E

S28 | S27

1964

Bury original stone cor. alongside iron post.

N. 0° 06' W., beginning new measurement.

Asc. 120 ft. over SE. slope, through thick mahogany.

11.20 Spur, projects SW., desc. 80 ft. along W. slope.

21.50 Head of draw, drains SW., asc. 390 ft. over SW. slope.

39.27 The cor. of secs. 21, 22, 27 and 28, monumented with a sandstone, 14x10x8 ins., firmly set and mkd., as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 4 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T1N R24E

S21 | S22
S28 | S27

1964

Bury original stone cor. alongside iron post.

Land, mountainous.

Soil, rocky loam.

Timber, mahogany.

Undergrowth, sagebrush and grass.

Reestablishment of the Survey
Executed by A. D. Ferron in
1878, and A. Jessen in 1898.

From the cor. of secs. 22, 23, 26 and 27.

S. 88° 38' W., between secs. 22 and 27.

Over mountainous land; along top of spur, through scattered pinon and juniper.

4.00 Desc. 160 ft. over SW. slope, through thick sagebrush.

Dependent Resurvey of the Subdivision, T. 1 N., R. 24 E.

CHAINS

21.10 Bottom of draw, drains SE.; asc. 400 ft. along E. slope, through scattered pinon and juniper.

39.99 Point for the $\frac{1}{4}$ sec. cor. of secs. 22 and 27, at proportionate distance; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins. in the ground, and in a mound of stone, $3\frac{1}{2}$ ft. base to top, with brass cap mkd.

T1N R24E

$\frac{1}{4}$ $\frac{S22}{S27}$

1964

Continue ascent, 760 ft. along E. slope.

63.30 Top of ridge, bears N. and S.; desc. 210 ft. over SW. slope to the sec. cor.

79.98 The cor. of secs. 21, 22, 27 and 28.

Land, mountainous.

Soil, rocky loam.

Timber, pinon and juniper.

Undergrowth, sagebrush and grass.

Reestablishment of the Survey
Executed by A. Jessen in 1898.

N. $0^{\circ} 05'$ W., between secs. 21 and 22.

Over mountainous land; asc. 130 ft. along S. slope, through scattered mahogany.

5.00 Top of ridge, bears NW. and SE.; thence along W. slope.

20.70 Desc. 520 ft. along N. slope, through thick sagebrush.

39.67 The point for the $\frac{1}{4}$ sec. cor. of secs. 21 and 22, determined from the original bearing trees:

A pine, 20 ins. diam., bears N. $25^{\circ} 30'$ E., 9 lks. dist., mkd. $\frac{1}{4}$ S22 BT.

A pine, 18 ins. diam., bears S. $16^{\circ} 45'$ W., 30 lks. dist., mkd. $\frac{1}{4}$ S21 BT.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground, and in a collar of stone to top, with brass cap mkd.

T1N R24E

$\frac{1}{4}$

S21 | S22

1964

Dependent Resurvey of the Subdivision, T. 1 N., R. 24 E.

CHAINS							
	<p>N. 0° 14' W., beginning new measurement.</p> <p>Desc. 240 ft. along N. slope, through thick pine timber.</p>						
9.00	<p>Leave timber.</p>						
25.60	<p>Bottom of draw, drains W.; jeep road along draw; asc. 280 ft. along S. slope.</p>						
38.70	<p>Spur, slopes SW.; asc. 40 ft. along W. slope to sec. cor.</p>						
41.47	<p>The cor. of secs. 15, 16, 21 and 22, monumented with a sandstone, 30x10x6 ins., firmly set and mkd., as described in the official record.</p> <p>At the cor. point</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.</p> <table style="margin-left: auto; margin-right: auto; border-collapse: collapse;"> <tr> <td colspan="2" style="text-align: center;">T1N R24E</td> </tr> <tr> <td style="text-align: center; border-right: 1px solid black;">S16</td> <td style="text-align: center;">S15</td> </tr> <tr> <td style="text-align: center; border-right: 1px solid black;">S21</td> <td style="text-align: center;">S22</td> </tr> </table> <p style="text-align: center;">1964</p> <p>Bury original stone cor. alongside iron post.</p> <p>Land, mountainous. Soil, rocky loam. Timber, pine. Undergrowth, scattered sagebrush and bunch grass.</p>	T1N R24E		S16	S15	S21	S22
T1N R24E							
S16	S15						
S21	S22						
	<p>From the cor. of secs. 14, 15, 22 and 23.</p> <p>N. 89° 57' W., between secs. 15 and 22.</p> <p>Over mountainous land; asc. 1120 ft. along E. slope, through thick mahogany.</p>						
37.90	<p>Top of main ridge, bears N. and S.; desc. 40 ft. over SW. slope.</p>						
39.52	<p>The ¼ sec. cor. of secs. 15 and 22, monumented with a sandstone, 24x16x4 ins., firmly set and mkd., as described in the official record.</p> <p>At the cor. point</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 4 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.</p> <table style="margin-left: auto; margin-right: auto; border-collapse: collapse;"> <tr> <td colspan="2" style="text-align: center;">T1N R24E</td> </tr> <tr> <td colspan="2" style="text-align: center;">¼ S15</td> </tr> <tr> <td colspan="2" style="text-align: center;">S22</td> </tr> </table> <p style="text-align: center;">1964</p> <p>Bury original stone cor. alongside iron post.</p>	T1N R24E		¼ S15		S22	
T1N R24E							
¼ S15							
S22							

Dependent Resurvey of the Subdivision, T. 1 N., R. 24 E.

CHAINS

West, beginning new measurement.

Desc. 520 ft. over SW. slope, through thick sagebrush.

36.40 Spur slopes SW.; continue descent, 120 ft. along W. slope.

40.27 The cor. of secs. 15, 16, 21 and 22.

Land, mountainous.
Soil, rocky loam.
Timber, mahogany.
Undergrowth, sagebrush and bunch grass.

N. 0° 02' E., between secs. 15 and 16.

Over mountainous land, asc. 240 ft. over SW. slope, through thick sagebrush.

26.50 Top of spur, slopes W.; desc. 320 ft. over NW. slope, to 1/4 sec. cor.


27.00 Enter thick aspen and pine.

29.80 Leave timber.

39.86 The 1/4 sec. cor. of secs. 15 and 16, monumented with a sandstone, 22x18x6 ins., firmly set and mkd., as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 6 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.



Bury original stone cor. alongside iron post.

N. 0° 03' E., beginning new measurement.

Desc. 400 ft. along N. slope, through thick aspen.

0.50 Leave timber.

25.50 Bottom of draw, drains W.; jeep road along same; enter scattered juniper and pinon; asc. 80 ft. along S. slope.

39.96 The cor. of secs. 9, 10, 15 and 16, monumented with a sandstone, 35x24x6 ins., firmly set and mkd., as described in the official record, from which the original bearing trees:

A pine, 24 ins. diam., bears S. 33° E., 143 lks. dist., mkd. T1N R24E S15 BT.

Dependent Resurvey of the Subdivision, T. 1 N., R. 24 E.

CHAINS

A pine, 24 ins. diam., bears S. 62° 30' W., 209 lks. dist., mkd. T1N R24E S16 BT.

A pine, 20 ins. diam., bears N. 71° 30' W., 16 lks. dist., mkd. T1N R24E S9 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T1N R24E	
S9	S10
S16	S15

1964

Bury original stone cor. alongside iron post.

Land, mountainous.

Soil, rocky loam.

Timber, aspen and pine, juniper and pinon.

Undergrowth, scattered sagebrush.

From the cor. of secs. 10, 11, 14 and 15.

S. 89° 58' W., between secs. 10 and 15.

Over mountainous land; asc. 260 ft. over NE. slope, through juniper, mahogany and pinon.

26.50 Top of ridge, bears N. and S.; desc. 200 ft. over NW. slope.

39.90 The ¼ sec. cor. of secs. 10 and 15; monumented with a sandstone, 25x6x5 ins., firmly set and mkd., as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 4 ins. in the ground, and in a mound of stone, 3½ ft. base to top, with brass cap mkd.

T1N R24E	
¼ S10	
¼ S15	

1964

Bury original stone cor. alongside iron post.

S. 89° 57' W., beginning new measurement.

Desc. 290 ft. along W. slope, through thick pine and juniper.

40.31 The cor. of secs. 9, 10, 15 and 16.

Land, mountainous.

Soil, rocky loam.

Timber, juniper, mahogany and pinon.

Undergrowth, scattered sagebrush and bunch grass.

Dependent Resurvey of the Subdivision, T. 1 N., R. 24 E.

CHAINS

N. $0^{\circ} 06'$ E., between secs. 9 and 10.

Over mountainous land; asc. 200 ft. over SW. slope, through thick juniper and pinon.

40.52

The $\frac{1}{2}$ sec. cor. of secs. 9 and 10, mkd. by a large cross (+) chiseled on a sandstone boulder, 6x4x1 ft., as described in the official record, from which the original bearing trees:

A pine, 20 ins. diam., bears S. $76^{\circ} 40'$ W., 275 lks. dist., mkd. $\frac{1}{2}$ S9 BT.

A pine, 15 ins. diam., bears N. $2^{\circ} 25'$ E., 265 lks. dist., mkd. $\frac{1}{2}$ S10 BT.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., on sandstone boulder, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T1N R24E

$\frac{1}{2}$

S9 | S10

1964

N. $0^{\circ} 04'$ W., beginning new measurement.

Along W. slope, through thick juniper and pinon.

23.50

Desc. 240 ft. over NW. slope.

28.00

Leave timber.

40.19

The cor. of secs. 3, 4, 9 and 10, monumented with a sandstone, 20x8x5 ins., firmly set and mkd., as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 12 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T1N R24E

S4 | S3

S9 | S10

1964

Bury original stone cor. alongside iron post.

Land, mountainous.

Soil, rocky loam.

Timber, juniper and pinon.

Undergrowth, scattered sagebrush.

Dependent Resurvey of the Subdivision, T. 1 N., R. 24 E.

CHAINS

From the cor. of secs. 2, 3, 10 and 11.

N. 89° 57' W., between secs. 3 and 10.

Over mountainous land; asc. 640 ft, over NE. slope, through thick juniper and pinon.

39.88

The $\frac{1}{4}$ sec. cor. of secs. 3 and 10, monumented with a sandstone, 12x8x6 ins., firmly set and mkd., as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 4 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T1N R24E
 $\frac{1}{4}$ — S3
 S10

1964

Bury original stone cor. alongside iron post,

N. 89° 52' W., beginning new measurement.

Asc. 280 ft. over NE. slope, through thick juniper.

24.40

Top of spur, slopes N.; desc. 160 ft. over NW. slope.

39.69

The cor. of secs. 3, 4, 9 and 10.

Land, mountainous.

Soil, rocky loam.

Timber, juniper and pinon.

Undergrowth, scattered bunches of grass.

N. 2° 29' W., between secs. 3 and 4.

Over mountainous land; desc. 520 ft. over NE. slope, through thick juniper and pinon.

40.38

The $\frac{1}{4}$ sec. cor. of secs. 3 and 4, monumented with a sandstone, 20x10x6 ins., firmly set and mkd., as described in the official record, from which the original bearing tree:

A pine, 5 ins. diam., bears N. 16° W., 21 lks. dist., mkd. $\frac{1}{4}$ S4 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T1N R24E
 $\frac{1}{4}$
 S4 | S3
 1964

Dependent Resurvey of the Subdivision, T. 1 N., R. 24 E.

CHAINS

Bury original stone cor. alongside iron post.

N. 0° 44' W., beginning new measurement.

Over broken ridges, through thick juniper and pinon.

40.96 The cor. of secs. 3, 4, 33 and 34, on the N. bdy. of the Tp., monumented with an iron post, 2½ ins. diam., set and marked as described in the record of the 1963 resurvey.

Land, mountainous.
Soil, rocky loam.
Timber, juniper and pinon.
Undergrowth, scattered patches of grass.

From the standard cor. of secs. 32 and 33, on the S. bdy. of the Tp.


N. 0° 07' E., between secs. 32 and 33.

Over rolling bottomland, covered with thick sagebrush; along an old fence line.

41.06 The ¼ sec. cor. of secs. 32 and 33, monumented with a sandstone, 14x8x6 ins., firmly set and mkd., as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.



Bury original stone cor. alongside iron post.

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

N. 0° 04' E., beginning new measurement.

Continue over bottomland, through thick sagebrush.

20.10 Wash, 4 ft. deep, 12 lks. wide, drains SW.

28.40 Barbed wire fence, bears E. and W.

31.80 Unimproved dirt road, bears N. 45° E. and S. 45° W.

40.39 The cor. of secs. 28, 29, 32 and 33, monumented with a sandstone, 16x9x5 ins., firmly set and mkd., as described in the official record.

Dependent Resurvey of the Subdivision, T. 1 N., R. 24 E.

CHAINS

At the cor. point
 Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone to top, with brass cap mkd.

T1N R24E	
S29	S28
S32	S33

1964

Bury original stone cor. alongside iron post.

Land, rolling bottomland.
 Soil, rocky loam.
 Timber, none.
 Undergrowth, thick sagebrush and grass.

From the cor. of secs. 27, 28, 33 and 34.

N. 89° 51' W., between secs. 28 and 33.

Over mountainous land; asc. 140 ft. over NE. slope, through thick mahogany.

13.20 Top of spur, slopes N.; desc. 120 ft. over NW. slope.

27.40 Draw drains N.; asc. 160 ft. over NE slope.

39.21 The ¼ sec. cor. of secs. 28 and 33, mkd. by a large cross (+) chiseled on the top of a sandstone boulder, 10x10x2 ft. above ground.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., on the exact cor. point, on sandstone boulder, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T1N R24E	
¼	S28
	S33

1964

N. 89° 55' W., beginning new measurement.

Top of spur, slopes N.; desc. 440 ft. over NW. slope, into Warren Draw.

33.70 Wash in bottom of Warren Draw, drains SW.; unimproved dirt road along same; thence over bottomland.

40.57 The cor. of secs. 28, 29, 32 and 33.

Land, mountainous; bottomland for W. 7 chs.
 Soil, rocky loam.
 Timber, mahogany.
 Undergrowth, sagebrush on W. 33.00 chs.

Dependent Resurvey of the Subdivision, T. 1 N., R. 24 E.

CHAINS

N. 0° 1' E., between secs. 28 and 29.

Over rolling bottomland, covered with thick sagebrush.

18.00 Unimproved dirt road, bears N. 2° E. and S. 2° W.

40.11 The $\frac{1}{4}$ sec. cor. of secs. 28 and 29, monumented with a sandstone, 12x8x6 ins., firmly set and mkd., as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T1N R24E	
$\frac{1}{4}$	
S29	S28
1964	

Bury original stone cor. alongside iron post.

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

North, beginning new measurement.

Continue over bottomland.

31.90 Barbed wire fence, 7 strands, bears E. and W.

40.03 The cor. of secs. 20, 21, 28 and 29, monumented with a sandstone, 15x8x8 ins., firmly set and mkd., as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T1N R24E	
S20	S21
S29	S28

1964

Bury original stone cor. alongside iron post.

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Land, rolling bottomland.

Soil, sandy loam.

Timber, none.

Undergrowth, thick sagebrush and grass.

From the cor. of secs. 21, 22, 27 and 28.

N. 88° 15' W., between secs. 21 and 28.

Dependent Resurvey of the Subdivision, T. 1 N., R. 24 E.

CHAINS

Over mountainous land; asc. 80' ft. over SW. slope, through thick sagebrush and scattered mahogany.

14.60 Top of spur, slopes SW.; desc. 600 ft. over NW. slope.

39.84 The 1/4 sec. cor. of secs. 21 and 28, monumented with a sandstone, 18x12x10 ins., firmly set and mkd., as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 12 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T1N R24E

1/4 S21

S28

1964

Bury original stone cor. alongside iron post.

S. 89° 54' W., beginning new measurement.

Enter Warren Draw, bears NE. and SW., covered with thick sagebrush and grass undergrowth.

26.06 Unimproved dirt road, bears N. and S.

39.94 The cor. of secs. 20, 21, 28 and 29.

Land, mountainous for E. half mile.

Soil, clay loam.

Timber, scattered mahogany, for E. 10.00 chs.

Undergrowth, thick sagebrush and grass.

N. 0° 03' E., between secs. 20 and 21.

Over rolling bottomland, through thick sagebrush and grass.

10.39 Dry spring, drains E., irregularly.

21.39 Unimproved dirt road, bears NW. and SE.

31.20 Wash, 2 ft. deep, 6 lks. wide, drains E. irregularly.

40.13 The 1/4 sec. cor. of secs. 20 and 21, monumented with a sandstone, 12x10x6 ins., firmly set and mkd., as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.

T1N R24E

1/4

S20 | S21

1964

Dependent Resurvey of the Subdivision, T. 1 N., R. 24 E.

CHAINS

Bury original stone cor. alongside iron post.

N. 0° 01' E., beginning new measurement.

Continue over bottomland.

13.90 Top of spur, 75 ft. high, projects SE.; desc. 80 ft. over NE. slope.

28.00 Bottom of draw, drains E.; asc. 120 ft. along S. slope.

40.12 The cor. of secs. 16, 17, 20 and 21, monumented with a sandstone, 18x5x5 ins., firmly set and mkd., as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 4 ins. in the ground, and in a mound of stone, 4½ ft. base to top, with brass cap mkd.

T1N R24E	
S17	S16
S20	S21

1964

Bury original stone cor. alongside iron post.

Land, bottomland, S. half mile.

Soil, rocky loam.

Timber, none.

Undergrowth, sagebrush and grass.

From the cor. of secs. 15, 16, 21 and 22.

N. 89° 58' W., between secs. 16 and 21.

Over mountainous land; desc. 480 ft. along W. slope, through thick sagebrush undergrowth.

26.70 Enter Warren Draw, bears N. and S.; thence over rolling bottomland, through thick sagebrush.

39.73 Point for the ¼ sec. cor. of secs. 16 and 21, at proportionate distance; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone to top, with brass cap mkd.

T1N R24E	
¼	S16
	S21

1964

Dependent Resurvey of the Subdivision, T. 1 N., R. 24 E.

CHAINS

From which

A spring bears S. 16° E., 15.00 chs. dist.

Continue over bottomland, through thick sagebrush.

43.70 Wash, 4 ft. deep, 12 lks. wide, drains N.

54.64 Road, unimproved dirt, bears N. and S.

56.00 Toliver's Creek, 4 ft. deep, 12 lks. wide, drains N.

79.46 The cor. of secs. 16, 17, 20 and 21.

Land, mountainous, E. 25.00 chs.

Soil, rocky loam.

Timber, none.

Undergrowth, thick sagebrush.

N. 1° 48' W., between secs. 16 and 17.

Over mountainous land; along E. slope, through scattering mahogany.

4.00 Top of spur, slopes NE.; desc. 120 ft. along N. slope, changing to E. slope.

39.07 The 1/2 sec. cor. of secs. 16 and 17, monumented with a sandstone, 18x6x6 ins., firmly set and mkd., as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 10 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T1N R24E

1/2

S17|S16

1964

Bury original stone cor. alongside iron post.

N. 0° 19' W., beginning new measurement.

Continue along E. slope, through thick mahogany.

40.39 The cor. of secs. 8, 9, 16 and 17, monumented with a sandstone, 20x10x6 ins., firmly set and mkd., as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, and in a collar of stone to top, with brass cap mkd.

Dependent Resurvey of the Subdivision, T. 1 N., R. 24 E.

CHAINS

T1N R24E

S8	S9
S17	S16

1964

Bury original stone cor. alongside iron post.

Land, mountainous.

Soil, rocky loam.

Timber, mahogany.

Undergrowth, sagebrush.

From the cor. of secs. 9, 10, 15 and 16.

S. 89° 51' W., between secs. 9 and 16.

Over mountainous land; desc. 240 ft. along gradual W. slope, through scattering juniper and pinon.

40.50

The $\frac{1}{2}$ sec. cor. of secs. 9 and 16, monumented with a sandstone, 14x6x5 ins., firmly set and mkd., as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T1N R24E

$\frac{1}{2}$	S9
	S16

1964

Bury original stone cor. alongside iron post.

S. 89° 48' W., beginning new measurement.

Over rolling bottomland, through thick sagebrush undergrowth.

3.10

Toliver's Creek (dry), drains N. irregularly.

6.82

Unimproved dirt road, bears N. and S.

12.82

Unimproved dirt road, bears N. and S.

31.57

Jeep road, bears NW. and SE.

40.37

The cor. of secs. 8, 9, 16 and 17.

Land, rolling bottomland.

Soil, rocky loam.

Timber, scattered juniper and pinon.

Undergrowth, sagebrush and grass.

N. 0° 05' W., between secs. 8 and 9.

Over rolling bottomland, through thick sagebrush.

Dependent Resurvey of the Subdivision, T. 1 N., R. 24 E.

CHAINS

- 15.00 Jeep road, bears E. and W.; leave thick sagebrush; enter scattering juniper and pinon.
- 22.10 Top of rocky spur, 40 ft. high, projects SE.
- 32.50 Head of spring, bears W. 100 lks. dist., drains E.; asc. 40 ft. over SE. slope.
- 40.82 The $\frac{1}{2}$ sec. cor. of secs. 8 and 9, monumented with a sandstone, 18x5x5 ins., firmly set and mkd., as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T1N R24E

$\frac{1}{2}$

S8	S9
----	----

1964

Bury original stone cor. alongside iron post.

N. 0° 18' W., beginning new measurement.

Asc. 40 ft. over SE. slope; thence along E. slope.

- 40.12 The cor. of secs. 4, 5, 8 and 9, monumented with a sandstone, 18x8x8 ins., firmly set and mkd., as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., in a mound of stone, $3\frac{1}{2}$ ft. base to top, with brass cap mkd.

T1N R24E

S5	S4
----	----

S8	S9
----	----

1964

Cor. situated in net wire fence line, bears S. 60° 45' W. and N. 22° 30' E.

Set original stone cor. alongside iron post.

Land, mountainous.

Soil, rocky loam.

Timber, scattering juniper and pinon.

Undergrowth, thick sagebrush and grass.

From the cor. of secs. 3, 4, 9 and 10.

S 89° 49' W., between secs. 4 and 9.

Dependent Resurvey of the Subdivision, T. 1 N., R. 24 E.

CHAINS

Over mountainous land; desc. 320 ft. along bottom of draw, through thick juniper and pinon timber.

41.03

The 1/4 sec. cor. of secs. 4 and 9, monumented with a sandstone, firmly set and mkd., as described in the official record. There is no remaining evidence of the original bearing trees.

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 15 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T1N R24E

1/4 S4

S9

1964

Bury original stone cor. alongside iron post.

N. 89° 44' W., beginning new measurement.

Over bottom of Tolivers Canyon, through thick chokecherry and sagebrush undergrowth.

1.60

Sandstone ledge, 15 ft. high, bears NW. and SE.

7.00

Tolivers Creek, 10 lks. wide, 6 ins. deep, drains NW.; asc. 520 ft. along E. slope, through thick sagebrush.

39.95

The cor. of secs. 4, 5, 8 and 9.

Land, mountainous.

Soil, rocky loam.

Timber, pinon and juniper.

Undergrowth, chokecherry and sagebrush.

N. 0° 18' W., between secs. 4 and 5.

Over mountainous land; along top of bench, through thick sagebrush, scattering pinon and juniper timber.

8.00

N. edge of bench, desc., 160 ft. over NE. slope.

40.28

The 1/4 sec. cor. of secs. 4 and 5, monumented with a sandstone, 17x6x4 ins., firmly set and mkd., as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 4 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T1N R24E

1/4
S5 | S4

1964

Dependent Resurvey of the Subdivision, T. 1 N., R. 24 E.

CHAINS

Bury original stone cor. alongside iron post.

N. 0° 09' W., beginning new measurement.

Continue over NE. slope, through thick sagebrush, and juniper and pinon timber.

18.70 S. rim of small canyon, bears NW. and SE.; desc. 200 ft. to bottom.

27.00 Pond of water, 15 ft. wide.

29.81 Head of spring, drains into pond; asc. S. slope, through thick juniper and pinon timber.

39.81 The cor. of secs. 4, 5, 32 and 33, on the N. bdy. of the Tp., monumented with an iron post, 2½ ins. diam., as described in the record of the 1963 resurvey.

Land, mountainous.
Soil, rocky loam.
Timber, juniper and pinon.
Undergrowth, sagebrush and grass.

From the standard cor. of secs. 31 and 32, on the S. bdy. of the Tp.


N. 0° 12' E., between secs. 31 and 32.

Over mountainous land; asc. 360 ft. over SE. slope, through thick mahogany.

16.00 Spur slopes E.; desc. 240 ft. over NE. slope, through thick pine and aspen timber.

40.60 Point for ¼ sec. cor. of secs. 31 and 32, at proportionate distance; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., in a rock slide, and in a mound of stone, 4 ft. base to top, with brass cap mkd.



Asc. 440 ft. over SE. slope, through pine and aspen timber.

81.20 Point for the cor. of secs. 29, 30, 31 and 32, at proportionate distance; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 4 ins. in the ground, and in a mound of stone, 3½ ft. base to top, with brass cap mkd.

Dependent Resurvey of the Subdivision T. 1 N. R. 24 E.

CHAINS

T1N R24E	
S30	S29
S31	S32

1964

Land, mountainous.
Soil, rocky loam.
Timber, aspen, pine and mahogany.
Undergrowth, grass and oak brush.

From the cor. of secs. 28, 29, 32 and 33.

N. 89° 52' W., between secs. 29 and 32.

Over rolling bottomland, through thick sagebrush.

3.20 Unimproved dirt road, bears N. and S., enter pond.

5.20 Leave pond.

33.40 Asc. 200 ft. along E. slope, through thick mahogany and scattered pine.

39.91 The $\frac{1}{4}$ sec. cor. of secs. 29 and 32, monumented with a sandstone, 20x10x4 ins., firmly set and mkd., as described in the official record, from which the original bearing tree:

A pine, 2 ins. diam., bears S. 29° 30' W.; 164 lks. dist., mkd. $\frac{1}{4}$ S32 BT.

At the cor. point

Set an iron post; 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 6 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T1N R24E	
$\frac{1}{4}$ S29	
$\frac{1}{4}$ S32	

1964

Bury original stone cor. alongside iron post.

S. 88° 09' W., beginning new measurement.

Asc. 440 ft. over NE. slope, through aspen and pine timber.

24.70 Top of spur, projects SE.; asc. 290 ft. over SE. slope.

40.36 The cor. of secs. 29, 30, 31 and 32.

Land, bottomland on E. 33.40 chs., mountainous the balance.

Soil, rocky loam.

Timber, aspen, pine and mahogany.

Undergrowth, thick sagebrush on E. 33.40 chs.

Dependent Resurvey of the Subdivision, T. 1 N., R. 24 E.

CHAINS

N. 89° 02' W., between secs. 30 and 31.

Over mountainous land; asc. 440 ft. over SE. slope, through thick aspen and pine timber.

17.50 Top of main ridge, bears N. and S.; desc. 520 ft. along W. slope, through thick aspen and pine timber.

40.35 Point for the 1/4 sec. cor. of secs. 30 and 31, at proportionate distance; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 4 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T1N R24E
 1/4 S30
 S31

1964

Desc. 320 ft. over W. slope, through thick pine timber.

53.00 Enter broken cove; continue gradual descent.

80.70 The cor. of secs. 25, 30 and 31, on the W. bdy. of the Tp.

Land, mountainous.
 Soil, rocky loam.
 Timber, aspen and pine.
 Undergrowth, patches of sagebrush.

From the cor. of secs. 29, 30, 31 and 32.

N. 0° 25' W., between secs. 29 and 30.

Over mountainous land; asc. 280 ft. over SE. slope, through thick mahogany and pine timber.

15.00 Thence along E. slope.

32.00 Leave pine timber, continue along E. slope.

40.60 Point for the 1/4 sec. cor. of secs. 29 and 30, at proportionate distance; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 4 ins. in the ground, and in a mound of stone, 3 1/2 ft. base to top, with brass cap mkd.

T1N R24E
 1/4
 S30 | S29

1964

Asc. 60 ft. along E. slope.

Dependent Resurvey of the Subdivision, T. 1 N., R. 24 E.

CHAINS

- 43.00 Ridge bears N. 5° E. and S. 5° W., thence along W. slope.
- 48.10 Enter thick pine timber; desc. 120 ft. over rocky NW. slope.
- 55.20 Leave pine timber.
- 63.10 Saddle on main ridge; ridge projects NW.; desc. over NE. slope, through thick pine timber.
- 81.20 The cor. of secs. 19, 20, 29 and 30, monumented with a sandstone, 36x16x9 ins., firmly set and mkd., as described in the official record, from which the remaining original bearing trees:

A pine, 9 ins. diam., bears N. 44° E., 73 lks. dist., mkd. T1N R24E S20 BT.

A pine, 10 ins. diam., bears S. 6° 30' E., 23 lks. dist., mkd. T1N R24E S29 BT.

An aspen, 13 ins. diam., bears S. 33° 10' W., 80 lks. dist., mkd. T1N R24E S30 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T1N R24E

S19 | S20

S30 | S29

1964

Deposit original stone cor. in mound of stone, alongside iron post.

Land, mountainous.

Soil, rocky loam.

Timber, thick pine and aspen.

Undergrowth, shadscale and grass.

- From the cor. of secs. 20, 21, 28 and 29.
- S. 89° 41' W., between secs. 20 and 29.
- Over rolling bottomland, through thick sagebrush and grass.
- 10.40 Asc. 200 ft. over SE. slope of rocky knoll.
- 16.50 Top of knoll, bears NW. and SE.; desc. 40 ft. over NW. slope.
- 39.81 The ¼ sec. cor of secs. 20 and 29, monumented with a sandstone, 20x12x4 ins., firmly set and mkd., as described in the official record.

At the cor. point

Dependent Resurvey of the Subdivision, T. 1 N., R. 24 E.

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T1N R24E

½ S20
—
S29

1964

Bury original stone cor. alongside iron post.

Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.

N. 89° 50' W., beginning new measurement.

Asc. 240 ft. along gradual E. slope, through thick sagebrush.

20.00 Base of main ridge, bears NE. and SW.; asc. 600 ft. along steep E. slope.

40.95 The cor. of secs. 19, 20, 29 and 30.

Land, mountainous.

Soil, rocky loam.

Timber, pine.

Undergrowth, sagebrush and grass.

N. 89° 53' W., between secs. 19 and 30.

Over mountainous land; asc. 50 ft. over NE. slope of main ridge, through thick pine timber.

4.00 Top of knoll on ridge, bears NW. and SE.

9.00 Desc. 160 ft. over SW. slope, through thick pine timber.

26.50 Top of spur, projects SW.; desc. 150 ft. over NW. slope.

40.24 The ½ sec. cor. of secs. 19 and 30, monumented with a sandstone, 30x15x8 ins., firmly set and mkd., as described in the official record, from which the original bearing trees:

A pine 18 ins. diam., bears N. 36° 30' E., 43 lks. dist., mkd. ½ S19 BT.

A pine, 15 ins. diam., bears S. 80° W., 48 lks. dist., mkd. ½ S30 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T1N R24E

½ S19
—
S30

1964

Deposit original stone cor. in the mound alongside iron post.

Dependent Resurvey of the Subdivision, T. 1 N., R. 24 E.

CHAINS

S. 89° 50' W., beginning new measurement.

Desc. 360 ft. over NW. slope, through thick aspen and pine timber.

29.80 Leave timber; enter thick sagebrush.

39.82 The cor. of secs. 19, 24, 25 and 30, on the W. bdy. of the Tp.

Land, mountainous.
Soil, rocky loam.
Timber, aspen and pine.
Undergrowth, sagebrush and grass.

From the cor. of secs. 19, 20, 29 and 30.

N. 0° 25' E., between secs. 19 and 20.

Over mountainous land; desc. 600 ft. over NE. slope, through thick aspen and pine timber.

35.00 Bottom of draw, drains E.

40.85 The 1/4 sec. cor. of secs. 19 and 20, monumented with a sandstone, 30x30x10 ins., mkd. with a cross (x) on the top, and 1/4 on the W. face.

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 8 ins. in the ground, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T1N R24E

1/4

S19 | S20

1964

Deposit original stone cor. in the mound alongside iron post.

N. 0° 20' E., beginning new measurement.

Asc. 480 ft. along S. slope, through thick aspen and pine timber; thence along E. slope.

39.57 Point for the cor. of secs. 17, 18, 19 and 20, at proportionate distance; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 6 ins. in the ground, and in a mound of stone, 3 1/2 ft. base to top, with brass cap mkd.

T1N R24E

S18 | S17

S19 | S20

1964

Dependent Resurvey of the Subdivision, T. 1 N., R. 24 E.

CHAINS

Land, mountainous.
Soil, rocky loam.
Timber, aspen and pine.
Undergrowth, scattered patches of grass.

From the cor. of secs. 16, 17, 20 and 21.

N. 89° 43' W., between secs. 17 and 20.

Over mountainous land; asc. 760 ft. along E. slope, through thick sagebrush.

29.50 Top of spur, projects SE; desc. 310 ft. over SW. slope, through scattered sagebrush and grass.

40.28 Point for the 1/2 sec. cor. of secs. 17 and 20, at proportionate distance; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 6 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T1N R24E

1/2 S17
S20

1964

Desc. 40 ft. over SW. slope.

59.60 Enter aspen grove.

61.60 Leave aspen grove; bottom of draw, drains SE., asc. 100 ft. over E. slope.

71.60 Enter thick aspen and pine timber; asc. 420 ft. along rocky E. slope.

80.56 The cor. of secs. 17, 18, 19 and 20.

Land, mountainous.
Soil, rocky loam.
Timber, aspen and pine at 71.60 chs.
Undergrowth, thick sagebrush and grass.

S. 89° 35' W., between secs. 18 and 19.

Over mountainous land; asc. 50 ft. along E. slope of main ridge, through thick pine and aspen timber.

4.10 Top of main ridge; bears NE. and SW.; desc. 60 ft. over NW. slope, through scrub brush and grass.

17.00 Enter thick pine and aspen timber, desc. 100 ft. over NW. slope.

40.32 Point for the 1/2 sec. cor. of secs. 18 and 19, at proportionate distance; there is no remaining evidence of the original cor.

Dependent Resurvey of the Subdivision, T. 1 N., R. 24 E.

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T1N R24E

$\frac{1}{2}$ S18
S19

1964

Desc. 290 ft. over NW. slope, through thick aspen and pine timber.

60.20 Leave timber; enter thick sagebrush, desc. 200 ft. over NW. slope.

80.54 The cor. of secs. 13, 18, 19 and 24, on the W. bdy. of the Tp.

Land, mountainous.

Soil, rocky loam.

Timber, thick aspen and pine.

Undergrowth, small scrub brush, sagebrush and grass.

From the cor. of secs. 17, 18, 19 and 20.

N. $1^{\circ} 03'$ E., between secs. 17 and 18.

Over mountainous land, desc. 40 ft. along E. slope, through thick pine and aspen timber.

7.00 Leave timber.

15.70 Saddle in ridge, bears N. 10° E., and S. 10° W., desc. 40 ft. along W. slope.

39.58 The $\frac{1}{4}$ sec. cor. of secs. 17 and 18, monumented with a sandstone, 20x8x5 ins. firmly set and mkd. as described in the official record.

At the cor. point.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 8 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T1N R24E

$\frac{1}{4}$
S18 | S17

1964

Bury the original stone cor. alongside the iron post.

N. $0^{\circ} 15'$ W., beginning new measurement.

Along rocky W. slope.

24.40 Enter aspen grove.

Dependent Resurvey of the Subdivision, T. 1 N., R. 24 E.

CHAINS

32.30

Leave aspen; asc. 160 ft. along SW. slope.

39.32

The cor. of secs. 7, 8, 17 and 18, monumented with a sandstone, 18x7x5 ins., firmly set and mkd., as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T1N R24E	
S7	S8
S18	S17

1964

Bury original stone cor. alongside iron post.

Land, mountainous.

Soil, rocky loam.

Timber, patches of thick aspen.

Undergrowth, scattered bunches of grass.

From the cor. of secs. 8, 9, 16 and 17.

S. 89° 59' W., between secs. 8 and 17.

Over mountainous land; asc. 490 ft. along E. slope, through dense undergrowth.

39.03

Point for the ¼ sec. cor. of secs. 8 and 17, at proportionate distance; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T1N R24E	
¼ S8	
¼ S17	

1964

Asc. 880 ft. along steep E. slope, through thick sagebrush.

69.30

Top of ridge, bears N. and S.; desc. 240 ft. over SW. slope.

78.06

The cor. of secs. 7, 8, 17 and 18.

Land, mountainous.

Soil, rocky loam.

Timber, none.

Undergrowth, thick sagebrush and grass.

N, 89° 54' W., between secs. 7 and 18.

Dependent Resurvey of the Subdivision, T. 1 N., R. 24 E.

CHAINS

Over mountainous land; desc. 520 ft. over SW. slope, thr thick sagebrush.

41.18 Point for the $\frac{1}{4}$ sec. cor. of secs. 7 and 18, at proportionate distance; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins. in the ground, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T1N R24E
 $\frac{S7}{S18}$

1964

Desc. 440 ft. over SW. slope, through sagebrush.

61.40 Draw, drains S.; asc. gradual NE. slope, through scattering aspen and pine.

82.36 The cor. of secs. 7, 12, 13 and 18, on the W. bdy. of the Tp.

Land, mountainous.
 Soil, rocky loam.
 Timber, scattering aspen and pine at 61.40 chs.
 Undergrowth, thick sagebrush and grass.

From the cor. of secs. 7, 8, 17 and 18.

N. $2^{\circ} 41'$ W., between secs. 7 and 8.

Over mountainous land; asc. 80 ft. over SW. slope, through sagebrush undergrowth.

5.10 Top of spur, slopes W.; desc. 840 ft. along steep N. slope, to $\frac{1}{4}$ sec. cor.

5.90 Enter thick aspen timber.

40.00 Leave timber.

41.26 The $\frac{1}{4}$ sec. cor. of secs. 7 and 8, monumented with a sandstone, 20x10x8 ins., firmly set and mkd., as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 8 ins. in the ground, and in a mound of stone, $4\frac{1}{2}$ ft. base to top, with brass cap mkd.

T1N R24E

$\frac{1}{4}$
 S7 | S8

1964

Bury original stone cor. alongside iron post.

Dependent Resurvey of the Subdivision, T. 1 N., R. 24 E.

CHAINS

N. 0° 12' W., beginning new measurement.

Desc. 240 ft. over NW. slope of broken plateau, through scattering pine and aspen timber.

20.30 Bottom of draw, drains W.; jeep road along same; asc. 100 ft. over SW. slope, through grove of aspen timber.

30.20 Leave aspen timber.

39.95 The cor. of secs. 5, 6, 7 and 8, monumented with a sandstone, 16x8x6 ins., firmly set and mkd., as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground, and in a mound of stone, 3½ ft. base to top, with brass cap mkd.

T1N R24E

S6	S5
S7	S8

1964

Bury original stone cor. alongside iron post.

Land, mountainous.

Soil, rocky loam.

Timber, scattered pine and aspen.

Undergrowth, thick sagebrush on S. 40.00 chs.

From the cor. of secs. 4, 5, 8 and 9.

S. 89° 45' W., between secs. 5 and 8.

Over mountainous land; asc. 20 ft. along gentle E. slope, through thick sagebrush.

3.34 Net wire fence, bears NW. and SE., asc. 310 ft. over NE. slope, through scattered mahogany.

30.10 Ridge, bears N. and S., desc. 40 ft. over NW. slope.

40.14 The ¼ sec. cor. of secs. 5 and 8, monumented with a sandstone, 15x8x5 ins., firmly set and mkd., as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 4 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T1N R24E

¼	S5
	S8

1964

Bury original stone cor. alongside iron post.

Dependent Resurvey of the Subdivision, T. 1 N., R. 24 E.

CHAINS

N. 89° 20' W., beginning new measurement.

Desc. 160 ft. over NW. slope, through scattered mahogany.

18.50 Base of ridge, bears NE. and SW.; desc. 50 ft. over bench land, sloping W.

39.60 The cor. of secs. 5, 6, 7 and 8.

Land, broken plateau on W. 21.10 chs.
Soil, rocky loam.
Timber, scattered mahogany.
Undergrowth, thick sagebrush.

S. 89° 50' W., between secs. 6 and 7.

Over bench land, desc. 30 ft. over W. slope, through scattered timber.

29.30 Sandstone ledge, 60 ft. high, bears NW. and SE.; desc. 240 ft. over SW. slope.

40.07 The 1/4 sec. cor. of secs. 6 and 7, mkd. by a large cross (+) chiseled on the top of a sandstone boulder, 8x6x1 1/2 ft. above ground, as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., on sandstone boulder, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T1N R24E
S6
1/4 S7

1964

S. 89° 41' W., beginning new measurement.

Desc. over gentle SW. slope, through thick sagebrush and grass.

16.20 Jeep road, bears NW. and SE.

31.70 Jeep road, bears NE. and SW.

33.30 Net wire fence, bears NE. and SW.

40.46 The cor. of secs. 1, 6, 7 and 12, on the W. bdy. of the Tp.

Land, broken plateau on E. 40.00 chs.
Soil, rocky loam.
Timber, scattered pine on E. 40.00 chs.
Undergrowth, thick sagebrush and grass.

From the cor. of secs. 5, 6, 7 and 8.

Dependent Resurvey of the Subdivision, T. 1 N., R. 14 E.

CHAINS

N. 0° 22' W., between secs. 5 and 6.

Over bench land, through scattered pine and aspen timber, desc. 200 ft. along N. slope.

6.60 Enter thick aspen and pine.

18.77 Draw, drains W.; jeep road along same; ascended 100 ft. over rocky SW. slope, leave timber.

32.90 Enter plateau, covered with scattered pine.

39.79 The point for the $\frac{1}{4}$ sec. cor. of secs. 5 and 6, determined from the original bearing trees:

A pine, 36 ins. diam., bears S. 11° 3' E., 150 lks. dist., mkd. $\frac{1}{4}$ S5 BT.

A pine, 30 ins. diam., bears S. 76° W., 32 lks. dist., mkd. $\frac{1}{4}$ S6 BT.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., in solid sandstone, and in a mound of stone, 3 ft. base, with brass cap mkd.

T1N R24E

$\frac{1}{4}$

S6 | S5

1964

N. 0° 10' W., beginning new measurement.

Desc. 120 ft. over NW. slope of plateau.

29.80 Jackson Draw, drains W.; unimproved dirt road along same.

38.60 Jeep road, bears NE. and SW.

40.10 The cor. of secs. 5, 6, 31 and 32, monumented with a iron post, 2 $\frac{1}{2}$ ins. diam., set and marked as described in the record of the 1963 resurvey.

Land, broken plateau.

Soil, rocky loam.

Timber, pine and aspen.

Undergrowth, thick sagebrush and grass.

General Description

The land and soil in Township 1 North, Range 14 East, consists mostly of a rocky clay, with a considerable amount of exposed sandstone on the steep slopes, while the broad canyon bottoms are a sandy clay loam. The general elevation of the township ranges from about 5500 ft. above sea level in the NE corner of the township, to about 8800 ft. above sea level in the south and

Dependent Resurvey of the Subdivision, T. 1 N., R. 24 E.

CHAINS

west portions of the township. The drainage for most of the township is in a northerly direction, into the Green River, about 3 miles distance from the North Boundary of the township; while sections 28, 29, 30, 31, 32 and 33, drain mostly in a southerly direction. There is a dense to scattered growth of juniper and pinon, with patches of dense aspen pine and mahogany timber, over most of the township. The undergrowth consists mainly of dense sagebrush and grass in the bottomlands, to sagebrush, wild apple, service berry and buck brush on the slopes. A number of springs of good water were noted in the township. There is one permanent habitation located in the southwest portion of section 6.

CERTIFICATE OF SURVEY

I, Fred R. Chappell, HEREBY CERTIFY upon honor in pursuance of special instructions bearing date of the 25 day of May, 1962

I have Independently Resurveyed the South (Salt Lake Base Line) and the Boundaries, and the Subdivision lines of Township, 1 North, Range 24

of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by me and under my direction and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

February 19, 1965 (Date)

Fred R. Chappell Supervisory Cadastral Surveyor

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

APPROVED FOR APPROVAL Date: OCT 29 1966

BUREAU OF LAND MANAGEMENT, Washington, D. C.

The foregoing field notes of the dependent resurvey of the South (Salt Lake Base and the West boundaries and the subdivisional lines of T. 1 N., R. 24 E. Salt Lake Meridian, Utah

executed by Fred R. Chappell

having been critically examined and found correct, are hereby approved.

NOV 17 1966 (Date)

E. J. Somerton (Chief, Division of Engineering)

CERTIFICATE OF TRANSCRIPT

I CERTIFY that the foregoing transcript of the field notes of the above-described surveys in is a true copy of the original field notes.

(Date)

Blank

Page

Blank

Page

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

ORIGINAL

FIELD NOTES

OF THE

DEPENDENT RESURVEY OF THE EAST BOUNDARY

OF TOWNSHIP 6 NORTH, RANGE 13 WEST

AND THE DEPENDENT RESURVEY OF THE SOUTH BOUNDARY

OF TOWNSHIP 7 NORTH, RANGE 12 WEST

AND THE SURVEY OF THE SOUTH AND EAST BOUNDARIES

AND A PORTION OF THE SUBDIVISION

OF TOWNSHIP 6 NORTH, RANGE 12 WEST

1966 NOV 7 AM 10 00
DEPT OF THE INTERIOR
BUR OF LAND MGMT

Of the SALT LAKE Meridian,

the State of UTAH

EXECUTED BY

Boyd S. Owens, Cadastral Surveyor

special instructions dated March 3, 1961, which provided

the surveys included under Group No. 443, approved March 10, 1961

assignment instructions dated March 3, 1961

Survey commenced June 14, 1961

Survey completed July 6, 1961

INDEX DIAGRAM

Township 6 NORTH , *Range* 12 WEST

8	10 6	10 5	11 4	11 27 3	12 23 2 24 23	13 21 1 19
7	7	8	9	26 10	11	18 19
5	18	17	29 16 28	26 15	14	18 18
4	19	20	21	25 22	23	24 18
3	20	20	28	25 27	26	25 17 21
2	21 16	31 30 22 30 16	28 15	24 24 14	25 20 14	26 17 14

Township 6 North, Range 12 West

Chains

The north boundary was surveyed by Edmund Wilkes and Charles L. Betts in 1886. The west boundary was surveyed by A. R. Talmantes and E. W. Dougall in 1903.

The following field notes are those of the dependent resurvey of the east boundary of Township 6 North, Range 13 West, the dependent resurvey of the south boundary of Township 7 North, Range 12 West, and the survey of the south boundary, the east boundary and a portion of the subdivision of Township 6 North, Range 12 West, deemed sufficient in extent to facilitate development of the natural resources and mark the boundaries of those sections that normally are considered state school sections.

Before restoring the corners, the lines of the original survey were retraced and diligent search made for any evidence of the original corners, or other calls of the original field note record.

The rules of proportionate measurement were applied to ascertain the position of the lost corners, only after exhausting every reasonable possibility of finding direct evidence of the lost corners.

The survey was executed with W. & L. E. Gurley Solar Transit No. 591189 constructed in accordance with the standard instrumental specifications of the Bureau of Land Management. The instrument was in good condition prior to the beginning of the survey and was maintained in proper adjustment throughout the progress of this survey.

Corners on east-west lines were set on the true latitudinal curve. Lines connecting previously established corners were run by random and true method, but for simplification of the record the random lines are omitted from the field notes. In accordance with the intent of the special instructions, all subdivisional corners established are calculated to be at the position they would occupy if the entire township were subdivided.

Measurements herein contained were made with a narrow steel tape, 8 chains in length, graduated every link for the first 100 links and thereafter at intervals of 10 links. The tape was tested by comparison with a one chain standard steel tape and found to be correct. Measurements were made on the slope with the vertical angle of each interval ascertained by a clinometer in good adjustment; horizontal equivalents alone are entered in the field notes. All lines of this survey were run by direct method where the lines were accessible; lines inaccessible were run by traverse or triangulation methods. The details of such traverses or triangulations have been thoroughly checked and verified, and in order to simplify the record the diagrams and reductions are omitted from these field notes.

The direction of the lines of this survey were determined by reference to true meridians established on line by altitude observations on the sun. The lines were carried forward by sustained angulation being supplemented by other numerous altitude observations on the sun taken throughout the progress of the survey.

The geographic position for the southeast corner of the township is at latitude $41^{\circ} 11' 17''$ N. and longitude $113^{\circ} 09' 15''$ W. as adjusted from traverses to U. S. G. S. triangulation station "Desert Peak", located in section 6, Township 5 North, Range 13 West.

The magnetic declination was read at a number of stations throughout the township and the average of these readings was found to be $16^{\circ} 45'$ east.

Dependent Resurvey of the East Boundary of Township 6 North, Range 12 West, With the Original Corners Remonumented to Function for Township 6 North, Range 13 West Only, And Establishment Thereon of Corner Stations Pertaining to Township 6 North, Range 12 West, at Regular Intervals of 100 Feet Beginning at the SW. Corner of Township 6 North, Range 12 West.

Chains

Dependent Resurvey of the East Boundary of Township 6 North, Range 12 West, With the Original Corners Remonumented to Function for Township 6 North, Range 13 West Only, And Establishment Thereon of Corner Stations Pertaining to Township 6 North, Range 12 West, at Regular Intervals of 100 Feet Beginning at the SW. Corner of Township 6 North, Range 12 West.

Reestablishment of the survey executed by A. R. Talmantes and I. Dougall in 1903.

Beginning at the cor. of Tps. 5 and 6 N., R. 13 W.; monumented with a fir post, 4x4 ins., set, mkd. and witnessed as described in the field notes of the dependent resurvey of the E. bdy. of T. 6 N., R. 13 W.

From this cor., the SW. cor. of T. 6 N., R. 12 W. bears S., 5.31' dist., monumented with a fir post, 4x4 ins., hereinafter described

North, along the E. bdy. of secs. 36.

Over nearly level alkali desert land through scattered salt brush and low hummocks.

34.69 Point for the $\frac{1}{4}$ sec. cor. of sec. 31, T. 6 N., R. 12 W.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribbled as follows:

T6N R12W $\frac{1}{4}$ S31 on E. face. Dig pits, 18x18x12 ins., N. and S. of cor., 4 ft. dist., and raise a mound of earth, 3 ft. base, 2 ft. high, E. of cor.

40.04 The original $\frac{1}{4}$ sec. cor. of secs. 31 and 36, monumented with a granite stone, 4x6x6 ins., firmly set, dimly mkd. and witnessed as described in the official record. This cor. now functions as the $\frac{1}{4}$ sec. cor. of sec. 36, T. 6 N., R. 13 W. only.

At the cor. point.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribbled as follows:

T6N R13W $\frac{1}{4}$ S36 on W. face. Dig pits, 18x18x12 ins., N. and S. of cor., 4 ft. dist. and raise a mound of earth, 3 ft. base, 2 ft. high, W. of cor. Bury stone cor. alongside fir post.

N. 0° 02' W. beginning new measurement.

Continue over level land.

34.65 Point for the cor. of secs. 30 and 31, T. 6 N., R. 12 W.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribbled as follows:

T6N S30 on NE. and R12W S31 on SE. faces, with 5 notches on the N. and 1 on S. faces. Dig pits 18x18x12 ins., NE. and SE. of cor., 4 ft. dist., and raise a mound of earth, 3 ft. base, 2 ft. high, E. of cor.

Dependent Resurvey of the East Boundary of T. 6 N., R. 13 W.

Chains

39.98 The original cor. of secs. 25, 30, 31 and 36, monumented with a limestone, 10x10x12 ins., firmly set, dimly mkd. and witnessed as described in the official record. This cor. now functions as the cor. of secs. 25 and 36, T. 6 N., R. 13 E. only.

At the cor. point.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:

T6N S25 on NW. and R13W S36 on SW. faces, with 5 notches on N. and 1 on S. edges. Dig pits 18x18x12 ins., NW. and SW. of cor., 4 ft. dist., and raise a mound of earth, 3 ft. base, 2 ft. high, W. of cor. Bury stone cor. alongside fir post.

Land, level desert.

Soil, alkali clay, fourth rate.

Vegetation, scattered small salt brush.

N. 0° 01' W. along the E. bdy. of sec. 25.

Over level alkali desert land through widely scattered salt brush.

14.20 Base of low, clay bench, bears NW. and S. 80° E., asc. 20 ft. over SW. slope.

24.00 Crest of clay bench, bears NW. and SE., desc. 15 ft. over gentle NE. slope.

33.80 N. base of bench, bears irregularly E. and W., thence over nearly level clay flats.

34.67 Point for the $\frac{1}{4}$ sec. cor. of sec. 30, T. 6 N., R. 12 W.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:

T6N R12W $\frac{1}{4}$ S30 on E. face. Dig pits, 18x18x12 ins., N. and S. of cor., 4 ft. dist., and raise a mound of earth, 3 ft. base, 2 ft. high, E. of cor.

40.10 The original $\frac{1}{4}$ sec. cor. of secs. 25 and 30, monumented with a limestone, 14x16x20 ins., firmly set, mkd. and witnessed as described in the official record. This cor. now functions as the $\frac{1}{4}$ sec. cor. of sec. 25, T. 6 N., R. 13 W. only.

At the cor. point.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:

T6N R13W $\frac{1}{4}$ S25 on W. face. Dig pits 18x18x12 ins., N. and S. of cor., 4 ft. dist., and raise a mound of earth, 3 ft. base, 2 ft. high, W. of cor. Bury stone cor. alongside fir post.

N: 0° 01' W., beginning new measurement.

Continue over level land.

Chains

34.57 Point for the cor. of secs. 19 and 30, T. 6 N., R. 12 W.
Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, set as follows:

T6N S19 on NE. and R12W S30 on SE. faces, with 4 notches on N. and 2 on S. edges. Dig pits 18x18x12 ins., NE. and SE. of cor., 4 ft. dist., and raise a mound of earth, 3 ft. base, 2 ft. high, E. of cor.

39.92 The original cor. of secs. 19, 24, 25, and 30 monumented with a stone, 4x6x12 ins., set, mkd. and witnessed as described in the official record. This cor. now functions as the cor. of secs. 24 and 25, T. 6 N., R. 13 W. only.

At the cor. point.

Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground with brass cap mkd,

T6N
R13W R12W
S24 | S19
S25 |
1961

Dig pits 18x18x12 ins., NW. and SW. of cor., 4 ft. dist., and raise a mound of earth, 3 ft. base, 2 ft. high, W. of cor. Bury stone alongside iron post.

Land, nearly level desert.

Soil, alkali clay, fourth rate.

Vegetation, scattered shadscale and salt brush.

N. 0° 04' W. along the E. bdy. of sec. 24.

Over level clay land through moderate shadscale.

34.65 Point for the ¼ sec. cor. of sec. 19, T. 6 N., R. 12 W.

Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground with brass cap mkd.

T6N
R13W R12W
¼
| S19
1961

Dig pits, 18x18x12 ins. N. and S. of cor., 4 ft. dist., and raise a mound of earth, 3 ft. base, 2 ft. high, E. of cor.

40.03 The original ¼ sec. cor. of secs. 19 and 24, monumented with a lime stone, 4x6x10 ins., set, mkd. and witnessed as described in the official record. This cor. now functions as the ¼ sec. cor. of sec. 24, T. 6 N., R. 13 W. only.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground with brass cap mkd.

T6N
R13W R12W
¼
S24 |
1961

Dependent Resurvey of the E. Bdy. of T. 6 N., R. 13 W.

Chains

Dig pits, 18x18x12 ins., N. and S. of cor., 4 ft. dist., and raise a mound of earth, 3 ft. base, 2 ft. high, W. of cor. Bury stone cor. alongside iron post.

N. 0° 01' W. beginning new measurement.

Continue over level land.

34.62 Point for the cor. of secs. 18 and 19, T. 6 N., R. 12 W.

Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd.

T6N	
R13W R12W	
S24	S18
	S19
1961	

Dig pits, 18x18x12 ins., NE. and SE. of cor., 4 ft. dist., and raise a mound of earth, 3 ft. base, 2 ft. high, E. of cor.

40.06 The original cor. of secs. 13, 18, 19 and 24, monumented with a limestone, 4x10x12 ins., set, mkd. and witnessed as described in the official record. This cor. now functions as the cor. of secs. 13 and 24, T. 6 N., R. 13 W. only.

At the cor. point.

Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd.

T6N	
R13W R12W	
S13	S18
S24	
1961	

Dig pits, 18x18x12 ins., NW. and SW. of cor., 4 ft. dist., and raise a mound of earth, 3 ft. base, 2 ft. high, W. of cor. Bury stone cor. alongside iron post.

Land, level desert.

Soil, clay, fourth rate.

Vegetation, scattered small shadscale.

N. 0° 03' W. along the E. bdy. of sec. 13.

Over level clay bench land through moderate shadscale.

34.56 Point for the ¼ sec. cor. of sec. 18, T. 6 N., R. 12 W.

Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd.

T6N	
R13W R12W	
¼	S18
1961	

Chains

Dig pits, 18x18x12 ins., N. and S. of cor., 4 ft. dist., and mound of earth, 3 ft. base, 2 ft. high, E. of cor.

40.00

The original $\frac{1}{4}$ sec. cor. of secs. 13 and 18, monumented with a stone, 4x4x10 ins., set, mkd. and witnessed as described in the official record. This cor. now functions as the $\frac{1}{4}$ sec. cor. of 13, T. 6 N., R. 13 W. only.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 22 ins. in the ground with brass cap mkd.

T6N
R13W R12W
 $\frac{1}{4}$ |
S13 |
1961

Dig pits, 18x18x12 ins., N. and S. of cor., 4 ft. dist., and raise a mound of earth, 3 ft. base, 2 ft. high, W. of cor. Bury stone cor. alongside iron post.

N. $0^{\circ} 03'$ W. beginning new measurement.

Continue over level bench land.

34.56

Point for the cor. of secs. 7 and 18, T. 6 N., R. 12 W.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 22 ins. in the ground with brass cap mkd.

T6N
R13W R12W
S13 | $\frac{S}{7}$
 | $\frac{S}{18}$
1961

Dig pits, 18x18x12 ins., NE. and SE. of cor., 4 ft. dist., and raise a mound of earth, 3 ft. base, 2 ft. high, E. of cor.

40.03

The original cor. of secs. 7, 12, 13 and 18, monumented with a limestone, 6x8x10 ins., set, mkd. and witnessed as described in the official record. This cor. now functions as the cor. of secs. 12 and 13, T. 6 N., R. 13 W. only.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 22 ins. in the ground with brass cap mkd.

T6N
R13W R12W
 $\frac{S}{12}$ | $\frac{S}{7}$
S13 |
1961

Dig pits, 18x18x12 ins., NW. and SW. of cor., 4 ft. dist., and raise a mound of earth, 3 ft. base, 2 ft. high, W. of cor. Bury stone cor. alongside iron post.

Land, level desert.

Soil, clay, fourth rate.

Vegetation, moderate shadscale.

Dependent Resurvey of the E. Bdy. of T. 6 N., R. 13 W.

Chains

N. 0° 06' W. along the E. bdy. of sec. 12.

Over level bench land through moderate shade.

34.53 Point for the $\frac{1}{4}$ sec. cor. of sec. 7, T. 6 N., R. 12 W.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:

T6N R12W $\frac{1}{4}$ S7 on E. face. Dig pits, 18x18x12 ins., N. and S. of cor., 4 ft. dist., and raise a mound of earth, 3 ft. base, 2 ft. high, E. of cor.

40.04 The original $\frac{1}{4}$ sec. cor. of secs. 7 and 12, monumented with a limestone, 6x6x18 ins., set, mkd. and witnessed as described in the official record. This cor. now functions as the $\frac{1}{4}$ sec. cor. of sec. 12, T. 6 N., R. 13 W. only.

At the cor. point

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:

T6N R13W $\frac{1}{4}$ S12 on W. face. Dig pits, 18x18x12 ins., N. and S. of cor., 4 ft. dist., and raise a mound of earth, 3 ft. base, 2 ft. high, W. of cor. Bury stone cor. alongside fir post.

North, beginning new measurement.

Continue over level bench land.

7.70 Edge of bench land; enter level clay flats with widely scattered salt brush.

34.49 Point for the cor. of secs. 6 and 7, T. 6 N., R. 12 W.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:

T6N S6 on NE. and R12W S7 on SE. faces, with 5 notches on S. and 1 on N. edges. Dig pits, 18x18x12 ins., NE. and SE. of cor., 4 ft. dist., and raise a mound of earth, 3 ft. base, 2 ft. high, E. of cor.

39.99 The original cor. of secs. 1, 6, 7 and 12, monumented with a limestone, 4x6x10 ins., set, mkd. and witnessed as described in the official record. This cor. now functions as the cor. of secs. 1 and 12, T. 6 N., R. 13 W. only.

At the cor. point

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:

T6N S1 on NW. and R13W S12 on SW. faces, with 5 notches on S. and 1 on N. edges. Dig pits, 18x18x12 ins., NW. and SW. of cor., 4 ft. dist., and raise a mound of earth, 3 ft. base, 2 ft. high, W. of cor. Bury stone cor. alongside fir post.

Chains

Land, level clay flats.
Soil, alkali clay, fourth rate.
Vegetation, moderate salt brush and shadscale.

North, along the E. bdy. of sec. 1.

Over level alkali clay flats through widely scattered salt brush.

34.50

Point for the $\frac{1}{4}$ sec. cor. of sec. 6, T. 6 N., R. 12 W.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, set as follows:

T6N R12W $\frac{1}{4}$ S6 on E. face. Dig pits, 18x18x12 ins., N. and S. of cor., 4 ft. dist., and raise a mound of earth, 3 ft. base, 2 ft. high, E. of cor.

40.02

The original $\frac{1}{4}$ sec. cor. of secs. 1 and 6, monumented with a lime stone, 4x4x8 ins., set, mkd. and witnessed as described in the official record. This cor. now functions as the $\frac{1}{4}$ sec. cor. of sec. 1, T. 6 N., R. 13 W. only.

At the cor. point.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, set as follows:

T6N R13W $\frac{1}{4}$ S1 on W. face; dig pits 18x18x12 ins., N. and S. of cor., 4 ft. dist., and raise a mound of earth, 3 ft. base, 2 ft. high, W. of cor. Bury stone cor. alongside fir post.

N. 0° 01' W., beginning new measurement.

Continue over level alkali clay flats.

34.48

Point for the 1/16 sec. cor. of sec. 6, T. 6 N., R. 12 W.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, set as follows:

T6N R12W 1/16 S6 on E. and 80 on S. faces. Dig pits, 18x18x12 ins., N. and S. of cor., 4 ft. dist., and raise a mound of earth, 3 ft. base, 2 ft. high, E. of cor.

47.10

Ditch, 20 lks. wide, 3 ft. deep, parallels railroad.

47.55

Power line, parallels railroad.

48.35

Center of Southern Pacific Railroad, bears N. 82° 55' W. and S. 82° 55' E.

48.65

Road, gravel, parallels railroad.

48.78

True point for the closing cor. of Tps. 6 and 7 N., R. 13 W. falls road and cannot be perpetuated.

From the true point the original witness closing cor. of Tps. 6 and 7 N., R. 13 W., bears W., 3.00 chs. dist., and is monumented with a sandstone, 10x12x18 ins., set, mkd. and witnessed as described in the official record.

Dependent Resurvey of the E. Bdy. of T. 6 N., R. 13 W.

Chains

At the witness cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground with brass cap mkd.

```

      T7N
    R13W T6N
      | R12W
WCC S36
   S 1 | S 6
      T6N
      1961
  
```

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor. Bury stone cor. alongside iron post.

From the true point for the closing cor. of Tps. 6 and 7 N., R. 13 W.

Point for the cor. of Tps. 6 and 7 N., R. 12 W. hereinafter described bears N. 0° 01' W., 18.66 chs. dist.

Topography along this tie is as follows:

0.53 chs., Telephone line, parallels railroad.

1.57 chs., Ditch, 20 lks. wide, 2 ft. deep, parallels railroad.

5.70 chs., Point for the 1/16 sec. cor. of sec. 6, T. 6 N., R. 12 W.

At the cor. point

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:

T6N R12W 1/16 S6 on E. and 100 on S. faces. Dig pits, 18x18x12 ins., N. and S. of cor., 4 ft. dist., and raise a mound of earth, 3 ft. base, 2 ft. high, E. of cor.

Land, level alkali clay desert.

Soil, alkali clay, fourth rate.

Vegetation, widely scattered salt brush.

Dependent Resurvey of the South Boundary of Township 7 North, Range 12 West, With Original Corners Remonumented to Function for Township 7 North, Range 12 West Only.

Reestablishment of the survey executed by Edmund Wilkes and Charles L. Betts in 1886.

From the cor. of Tps. 6 and 7 N., R. 12 W., as determined from the remains of the original pits:

At the cor. point

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:

Chains

- T7N R12W S31 on NE. and T6N R12W S6 on SE. faces, with 6 notches on N., S. and E. edges. Dig pits, 18x18x12 ins., N., S. and E. of cor., 4 ft. dist.
- East, along the S. bdy. of sec. 31.
- Over level, barren, alkali clay flats.
- 40.66 Point for the original $\frac{1}{4}$ sec. cor. of secs. 6 and 31 at proportionate dist.; there is no remaining evidence of the original cor. This cor. now functions as the $\frac{1}{4}$ sec. cor. of sec. 31, T. 7 N., R. 12 W. only.
- Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribbled as follows:
- T7N R12W $\frac{1}{4}$ S31 on N. face. Dig pits, 18x18x12 ins., E. and W. of cor., 4 ft. dist., and raise a mound of earth, 3 ft. base, 2 ft. high, N. of cor.
- 81.32 The original cor. of secs. 5, 6, 31 and 32, monumented with a stone, 4x6x10 ins., set, mkd. and witnessed as described in the official record. This cor. now functions as the cor. of secs. 31 and 32, T. 7 N., R. 12 W. only.
- At the cor. point
- Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribbled as follows:
- T7N S32 on NE. and R12W S31 on NW. faces, with 5 notches on E. and 1 on W. edges. Dig pits, 18x18x12 ins., E. and W. of cor., 4 ft. dist., and raise a mound of earth, 3 ft. base, 2 ft. high, N. of cor.
- Land, level alkali clay flats.
Soil, alkali clay, fourth rate.
Vegetation, scattered salt brush and shadscale.
- S. 89° 56' E., along the S. bdy. of sec. 32.
- Over level alkali flat through widely scattered salt brush.
- 40.71 Point for the original $\frac{1}{4}$ sec. cor. of secs. 5 and 32 at proportionate dist.; there is no remaining evidence of the original cor. This cor. now functions as the $\frac{1}{4}$ sec. cor. of sec. 32, T. 7 N., R. 12 W. only.
- Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribbled as follows:
- T7N R12W $\frac{1}{4}$ S32 on N. face. Dig pits, 18x18x12 ins., E. and W. of cor., 4 ft. dist., and raise a mound of earth, 3 ft. base, 2 ft. high, N. of cor.
- Continue over level land.
- 81.42 The original cor. of secs. 4, 5, 32 and 33, a stone 7x10x12 found lying loose on the ground. Position determined from the remains of the original pits. This cor. now functions as the cor. of secs. 32 and 33, T. 7 N., R. 12 W. only.

Dependent Resurvey of the S. Bdy. of T. 7 N., R. 12 W.

Chains

At the cor. point

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:

T7N S33 on NE. and R12W S32 on NW. faces, with 4 notches on E. and 2 on W. edges. Dig pits, 18x18x12 ins., NE. and NW. of cor., 4 ft. dist., and raise a mound of earth, 3 ft. base, 2 ft. high, N. of cor. Bury stone cor. alongside fir post.

Land, level alkali clay flats.
Soil, alkali clay, fourth rate.
Vegetation, widely scattered salt brush.

N. 89° 38' E., along the S. bdy. of sec. 33.

Over level alkali clay flats through widely scattered salt brush.

39.85

Point for the original $\frac{1}{4}$ sec. cor. of secs. 4 and 33 at proportionate dist.; there is no remaining evidence of the original cor. This cor. now functions as the $\frac{1}{4}$ sec. cor. of sec. 33, T. 7 N., R. 12 W. only.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:

T7N R12W $\frac{1}{4}$ S33 on N. face. Dig pits, 18x18x12 ins., E. and W. of cor., 4 ft. dist., and raise a mound of earth, 3 ft. base, 2 ft. high, N. of cor.

Continue over level land.

79.70

Point for the original cor. of secs. 3, 4, 33 and 34, at proportionate dist.; there is no remaining evidence of the original cor. This cor. now functions as the cor. of secs. 33 and 34, T. 7 N., R. 12 W. only.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:

T7N S34 on NE. and R12W S33 on NW. faces, with 3 notches on E. and W. edges. Dig pits, 18x18x12 ins., NE. and NW. of cor., 4 ft. dist.; and raise a mound of earth, 3 ft. base, 2 ft. high, N. of cor.

Land, level alkali desert.
Soil, alkali clay, fourth rate.
Vegetation, widely scattered salt brush.

N. 89° 38' E., along the S. bdy. of sec. 34.

Over level clay flats through scattered salt brush on low hummocks.

99.85

Point for the original $\frac{1}{4}$ sec. cor. of secs. 3 and 34, at proportionate dist.; there is no remaining evidence of the original cor. This cor. now functions as the $\frac{1}{4}$ sec. cor. of sec. 34, T. 7 N., R. 12 W. only.

Dependent of the S. of T. 7 N. R. 12 W.

Chains

- Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:
- T7N R12W $\frac{1}{4}$ S34 on N. face. Dig pits, 18x18x12 ins., E. and W. of cor., 4 ft. dist., and raise a mound of earth, 3 ft. base, 2 ft. high, N. of cor.
- Continue over level land.
- 79.70 Point for the original cor. of secs. 2, 3, 34 and 35, at proportionate dist.; there is no remaining evidence of the original cor. This cor. now functions as the cor. of secs. 34 and 35, T. 7 N., R. 12 W. only.
- Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:
- T7N S35 on NE. and R12W S34 on NW. faces, with 2 notches on E. and 4 on W. edges. Dig pits, 18x18x12 ins., NE. and NW. of cor., 4 ft. dist.
- Land, level clay flats.
Soil, alkali clay, fourth rate.
Vegetation, scattered salt brush.
- N. 89° 38' E. along the S. Bdy. of sec. 35.
- Over low, rolling clay hills, through shadscale and salt brush.
- Asc. 20 ft. over gentle W. slope.
- 10.20 Top of ascent, desc. 10 ft. over gentle E. slope.
- 19.80 Enter level alkali flats; leave vegetation.
- 39.85 Point for the original $\frac{1}{4}$ sec. cor. of secs. 2 and 35, at proportionate dist.; there is no remaining evidence of the original cor. This cor. now functions as the $\frac{1}{4}$ sec. cor. of sec. 35, T. 7 N., R. 12 W. only.
- Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:
- T7N R12W $\frac{1}{4}$ S35 on N. face. Dig pits, 18x18x12 ins., E. and W. of cor., 4 ft. dist., and raise a mound of earth, 3 ft. base, 2 ft. high, N. of cor.
- Continue over level land.
- 46.40 Enter low, rolling clay hills and moderate shadscale brush.
- 79.70 Point for the original cor. of secs. 1, 2, 35 and 36, at proportionate dist.; there is no remaining evidence of the original cor. This cor. now functions as the cor. of secs. 35 and 36, T. 7 N., R. 12 W. only.
- Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:
- T7N S36 on NE. and R12W S35 on NW. faces, with 1 notch on E. and 5 on W. edges. Dig pits, 18x18x12 ins., NE. and NW. of cor., 4 ft. dist.

Dependent Reserve of the S. Bdy. of T. 7 N., R. 12 W.

Chains

Land, level clay flats W. portion; low rolling clay hills E. portion.
Soil, alkali clay, fourth rate.
Vegetation, none W. portion; moderate shadscale brush E. portion.

N. 89° 38' E., along the S. bdy. of sec. 36.

Over low, rolling clay hills through moderate shadscale brush.

39.85 The original $\frac{1}{4}$ sec. cor. of secs. 1 and 36, monumented with a sandstone, 4x10x15 ins., set, mkd. and witnessed as described in the official record. This cor. now functions as the $\frac{1}{4}$ sec. cor. of sec. 36, T. 7 N., R. 12 W. only.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 22 ins. in the ground, with brass cap mkd.

T7N R12W
 $\frac{1}{4}$ S36
T6N
1961

Dig pits, 18x18x12 ins., E. and W. of cor., 4 ft. dist., and raise a mound of earth, 3 ft. base, 2 ft. high, W. of cor.; bury stone cor. alongside iron post. Deposit glass at base of iron post.

N. 89° 40' E. beginning new measurement.

Continue over low rolling hills.

40.22 The original cor. of Tps. 6 and 7 N., Rs. 11 and 12 W., monumented with a sandstone, 4x8x16 ins., set, mkd. and witnessed as described in the official record. This cor. now functions as the cor. of Tp. 7 N., Rs. 11 and 12 W. only.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 22 ins. in the ground, with brass cap mkd.

T7N
R12W R11W
S36|S31
S 6
T6N R11W
1961

Bury stone cor. alongside iron post.

Land, low rolling clay hills.
Soil, alkali clay, fourth rate.
Vegetation, moderate shadscale brush.

Survey of the South Boundary of Township 6 North, Range 12 West

From the cor. of Tps. 5 and 6 N., Rs. 11 and 12 W., monumented with a fir post, 4x4 ins., set, mkd. and witnessed as described in the 1961 field notes of the S. bdy. of T. 6 N., R. 11 W.

Chains

West, bet. secs. 1 and 36.

Over level clay flats through small salt brush.

40.00

Point for the $\frac{1}{4}$ sec. cor. of secs. 1 and 36.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, set as follows:

T6N $\frac{1}{4}$ S36 on N.; R12W on E. and T5N S1 on S. faces. Dig pits, 18x18x12 ins., E. and W. of cor., 4 ft. dist., and raise a mound of earth, 3 ft. base, 2 ft. high, N. of cor.

Continue over level land.

80.00

Point for the cor. of secs. 1, 2, 35 and 36.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, set as follows:

T6N S36 on NE.; R12W S1 on SE.; T5N S2 on SW. and S35 on NW. faces, with 1 notch on E. and 5 on W. edges. Dig pits, 18x18x12 ins., 4 ft. dist. in each quadrant.

Land, level clay flats.
Soil, alkali clay, fourth rate.
Vegetation, small salt brush.

West, bet. secs. 2 and 35.

Over level clay flats through small brush and low hummocks.

40.00

Point for the $\frac{1}{4}$ sec. cor. of secs. 2 and 35.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, set as follows:

T6N $\frac{1}{4}$ S35 on N.; R12W on E. and T5N S2 on S. faces. Dig pits, 18x18x12 ins., E. and W. of cor., 4 ft. dist., and raise a mound of earth, 3 ft. base, 2 ft. high, N. of cor.

Continue over level land.

80.00

Point for the cor. of secs. 2, 3, 34 and 35.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, set as follows:

T6N S35 on NE.; R12W S2 on SE.; T5N S3 on SW. and S34 on NW. faces, with 2 notches on E. and 4 on W. edges. Dig pits, 18x18x12 ins., 4 ft. dist., in each quadrant.

Land, level clay flats.
Soil, alkali clay, fourth rate.
Vegetation, small salt brush.

West, bet. secs. 3 and 34.

Survey of the S. Bdy. of T. 6 N., R. 12 W.

Chains

Over level alkali clay flats through small salt brush.

40.00

Point for the $\frac{1}{4}$ sec. cor. of secs. 3 and 34.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:

T6N $\frac{1}{4}$ S34 on N.; R12W on E. and T5N S3 on S. faces.
Dig pits, 18x18x12 ins., E. and W. of cor., 4 ft.
dist., and raise a mound of earth, 3 ft. base, 2 ft.
high, N. of cor.

Continue over level land.

80.00

Point for the cor. of secs. 3, 4, 33 and 34.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:

T6N S34 on NE.; R12W S3 on SE.; T5N S4 on SW. and S33
on NW. faces, with 3 notches on E. and W. edges. Dig
pits, 18x18x12 ins., 4 ft. dist. in each quadrant.

Land, level clay flats.
Soil, alkali clay, fourth rate.
Vegetation, small salt brush.

West, bet. secs. 4 and 33.

Over nearly level clay flats through small salt brush.

4.10

Leave level land, thence over low, rolling clay hills.

14.70

S. end of rocky point, 25 ft. above flat, projects SE., thence over rolling land.

40.00

Point for the $\frac{1}{4}$ sec. cor. of secs. 4 and 33.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:

T6N $\frac{1}{4}$ S33 on N.; R12W on E. and T5N S4 on S. faces.
Dig pits, 18x18x12 ins., E. and W. of cor., 4 ft.
dist., and raise a mound of earth, 3 ft. base, 2 ft.
high, N. of cor.

Continue over rolling land.

75.00

Enter level clay flats.

80.00

Point for the cor. of secs. 4, 5, 32 and 33.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:

T6N S33 on NE.; R12W S4 on SE.; T5N S5 on SW. and S32
on NW. faces, with 5 notches on E. and 2 on W. edges.
Dig pits, 18x18x12 ins., 4 ft. dist. in each quadrant.

Land, low, rolling clay hills.
Soil, alkali clay, fourth rate.
Vegetation, small salt brush and shadscale.

CHAINS

- West, bet. secs. 5 and 32.
- Over level alkali clay flat through salt brush and low hummocks
- 40.00 Point for the 1/4 sec. cor. of secs. 5 and 32.
- Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, as follows:
 - T6N 1/4 S32 on N.; R12W on E. and T5N S5 on S. faces.
 - Dig pits, 18x18x12 ins., E. and W. of cor., 4 ft. dist., and raise a mound of earth, 3 ft. base, 2 ft. high, N. of cor.
- Continue over level land.
- 80.00 Point for the cor. of secs. 5, 6, 31 and 32.
- Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, as follows:
 - T6N S32 on NE.; R12W S5 on SE.; T5N S6 on SW. and S31 on NW. faces, with 5 notches on E. and 1 on W. edges.
 - Dig pits, 18x18x12 ins., 4 ft. dist. in each quadrant.
- Land, nearly level clay flats.
- Soil, alkali clay, fourth rate.
- Vegetation, small salt brush.
- West, bet. secs. 6 and 31.
- Over nearly level alkali clay flats through salt brush.
- 40.00 Point for the 1/4 sec. cor. of secs. 6 and 31.
- Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, as follows:
 - T6N 1/4 S31 on N.; R12W on E. and T5N S6 on S. faces.
 - Dig pits, 18x18x12 ins., E. and W. of cor., 4 ft. dist., and raise a mound of earth, 3 ft. base, 2 ft. high, N. of cor.
- Continue over nearly level land.
- 58.01 Intersect the W. bdy. of the Tp.
- Point for the SW. cor. of T. 6 N., R. 12 W. only, in accordance with the special instructions.
- Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, as follows:
 - T6N R12W S31 on NE. face, with 6 notches on N. and E. edges. Dig pits, 18x18x12 ins., E. and N. of cor., 4 ft. dist., and raise a mound of earth, 3 ft. base, 2 ft. high, NE. of cor.
- From this cor., the cor. of Tps. 5 and 6 N., R. 13 W., bears N., 5.31 chs. dist., and is monumented with a fir post, set, mkd. and witnessed as described in the 1961 field notes of the S. bdy. of T. 6 N., R. 13 W., surveyed under Group 442.

Chains

Land, level clay flats.
Soil, alkali clay, fourth rate.
Vegetation, scattered small salt brush.

Survey of the East Boundary of Township 6 North, Range 12 West

From the cor. of Tps. 5 and 6 N., Rs. 11 and 12 W., monumented with a fir post, set, mkd. and witnessed as described in the 1961 field notes of the S. bdy. of T. 6 N., R. 11 W.

North, bet. secs. 31 and 36.

Over level alkali flats through small salt brush and low hummocks.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 31 and 36.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:

T6N on N.; R11W S31 on E. and R12W $\frac{1}{4}$ S36 on W. faces.
Dig pits, 18x18x12 ins., N. and S. of cor., 4 ft. dist.,
and raise a mound of earth, 3 ft. base, 2 ft. high, W.
of cor.

Continue over level alkali flats.

80.00 Point for the cor. of secs. 25, 30, 31 and 36.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:

T6N S30 on NE.; R11W S31 on SE.; R12W S36 on SW. and
S25 on NW. faces, with 1 notch on S. and 5 on N. edges.
Dig pits, 18x18x12 ins., 4 ft. dist. in each quadrant.

Land, level clay flats.
Soil, alkali clay, fourth rate.
Vegetation, small salt brush.

North, bet. secs. 25 and 30.

Over level alkali clay flats through small salt brush and low hummocks.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 25 and 30.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:

T6N on N.; R11W S30 on E. and R12W $\frac{1}{4}$ S25 on W. faces.
Dig pits, 18x18x12 ins., N. and S. of cor., 4 ft. dist.,
and raise a mound of earth, 3 ft. base, 2 ft. high, W.
of cor.

Continue over level alkali clay land.

80.00 Point for the cor. of secs. 19, 24, 25 and 30.

S. 1/4 of the E. 1/4 of T. 6 N. R. 12 W.

Chains

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, so as follows:

T6N S19 on NE.; R11W S30 on SE.; R12W S25 on SW. and S24 on NW. faces, with 2 notches on S. and 4 on N. edges. Dig pits, 18x18x12 ins., 4 ft. dist. in each quadrant.

Land, level clay flats.
Soil, alkali clay, fourth rate.
Vegetation, small salt brush.

North, bet. secs. 19 and 24.

Over level alkali clay flats through salt brush and low hummocks.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 19 and 24.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, so as follows:

T6N on N.; R11W S19 on E. and R12W $\frac{1}{4}$ S24 on W. faces. Dig pits, 18x18x12 ins., N. and S. of cor., 4 ft. dist., and raise a mound of earth, 3 ft. base, 2 ft. high, W. of cor.

Continue over level alkali clay flats.

43.70 Summit of small clay knoll, 10 ft. high.

80.00 Point for the cor. of secs. 13, 18, 19 and 24.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, so as follows:

T6N S18 on NE.; R11W S19 on SE.; R12W S24 on SW. and S13 on NW. faces, with 3 notches on N. and S. edges. Dig pits, 18x18x12 ins., 4 ft. dist. in each quadrant.

Land, level clay flats.
Soil, alkali clay, fourth rate.
Vegetation, small salt brush.

North, bet. secs. 13 and 18.

Over low, rolling clay hills through small shadscale brush.

20.00 Summit of low, clay ridge, bears NE. and SW.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 13 and 18.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, so as follows:

T6N on N.; R11W S18 on E. and R12W $\frac{1}{4}$ S13 on W. faces. Dig pits, 18x18x12 ins., N. and S. of cor., 4 ft. dist., and raise a mound of earth, 3 ft. base, 2 ft. high, W. of cor.

Thence over level alkali clay flats.

Survey of the E. Bdy. of T. 6 N., R. 12 W.

Chains

80.00 Point for the cor. of secs. 7, 12, 13 and 18.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:

T6N S7 on NE.; R11W S18 on SE.; R12W S13 on SW. and S12 on NW. faces; with 4 notches on S. and 2 on N. edges.
Dig pits, 18x18x12 ins., 4 ft. dist. in each quadrant.

Land, low, rolling S. portion; level alkali clay flats N. portion.
Soil, alkali clay, fourth rate.
Vegetation, small salt brush and shadscale.

North, bet. secs. 7 and 12.

Over level clay flats and low, small, clay knolls through small shadscale.

1.30 Road, unimproved dirt, bears NW. and SE.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 7 and 12.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:

T6N on N.; R11W S7 on E. and R12W $\frac{1}{4}$ S12 on W. faces.
Dig pits, 18x18x12 ins., N. and S. of cor., 4 ft. dist., and raise a mound of earth, 3 ft. base, 2 ft. high, W. of cor.

Continue over level clay flats.

80.00 Point for the cor. of secs. 1, 6, 7 and 12.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:

T6N S6 on NE.; R11W S7 on SE.; R12W S12 on SW. and S1 on NW. faces with 5 notches on S. and 1 on N. edges. Dig pits, 18x18x12 ins., 4 ft. dist. in each quadrant.

Land, level clay flats.

Soil, alkali clay, fourth rate.

Vegetation, small salt brush and shadscale.

North, bet. secs. 1 and 6.

Over nearly level clay flat with low clay knolls and small salt brush.

24.30 Power line, parallels railroad.

25.06 Center of Southern Pacific Railroad, bears N. 79° W. and S. 79° E.

25.35 Road, gravel, parallels railroad.

25.65 Telephone line, parallels railroad.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 1 and 6.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribble as follows:

T&M on N., R11W S6 on E. and R12W 1/16 S1 on W. faces.
Dig pits, 18x18x12 ins., N. and S. of cor., 4 ft. dist., and raise a mound of earth, 3 ft. base, 2 ft. high, W. of cor. Deposit glass alongside fir post.

Continue over level clay flats.

33. Enter rolling clay brush land.

34. Point for the 1/16 sec. cor. of secs. 1 and 6.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribble as follows:

T&M on N., R11W S6 on E., 80 on S. and R12W 1/16 S1 on W. faces. Dig pits, 18x18x12 ins., N. and S. of cor., 4 ft. dist., and raise a mound of earth, 3 ft. base, 2 ft. high, W. of cor. Deposit glass alongside fir post.

35. Point for the 1/16 sec. cor. of secs. 1 and 6.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribble as follows:

T&M on N., R11W S6 on E., 100 on S. and R12W 1/16 S1 on W. faces. Dig pits, 18x18x12 ins., N. and S. of cor., 4 ft. dist., and raise a mound of earth, 3 ft. base, 2 ft. high, W. of cor.

36. Enter the N. bdy. of the Tp.

Point for the closing cor. of T. 6 N., R. 11 and 12 W.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribble as follows:

R11W S6 on E., T&M CC on S. and R12W S1 on W. faces, with 6 matches on S. and W. edges. Dig pits, 18x18x12 ins., E., S. and W. of cor., 4 ft. dist. Deposit glass at base of post.

From this cor. the 1/4 sec. cor. of sec. 36, T. 7 N., R. 12 W. bears S. 89° 40' W., 15.98 chs. dist., and is monumented with a 24 in. iron post, heretofore described.

Land nearly level with small clay knolls.
Soil, almost clay, fourth rate.
Vegetation, small salt brush and shade tree.

Survey of a Portion of the Subdivision of Township 6 North, Range 12 West

From the cor. of secs. 1, 2, 35 and 36, on the S. bdy. of the Tp.

S. 17° 01' W. bet. secs. 35 and 36.

Over nearly level clay flats through scattered salt brush and low

Survey of a Portion of the Subdivision of T. 6 N., R. 12 W.

Chains

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 35 and 36.
Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:

T6N on N.; S36 on E.; R12W on S. and $\frac{1}{4}$ S35 on W. faces.
Dig pits, 18x18x12 ins., N. and S. of cor., 4 ft. dist.,
and raise a mound of earth, 3 ft. base, 2 ft. high, W. of cor.

Continue over level clay flats.

80.00 Point for the cor. of secs. 25, 26, 35 and 36.
Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:

T6N S25 on NE.; R12W S36 on SE.; S35 on SW. and S26 on NW. faces, with 1 notch on S. and E. edges. Dig pits, 18x18x12 ins., 4 ft. dist. in each quadrant.

Land, level clay flats.

Soil, alkali clay, fourth rate.

Vegetation, scattered small salt brush.

From the cor. of secs. 25, 30, 31 and 36, on the E. bdy. of the Tp.

N. 89° 59' W., bet. secs. 25 and 36.

Over nearly level clay flats through scattered salt brush and low hummocks.

39.98 Point for the $\frac{1}{4}$ sec. cor. of secs. 25 and 36.
Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:

$\frac{1}{4}$ S25 on N.; T6N on E.; S36 on S. and R12W on W. faces.
Dig pits, 18x18x12 ins., E. and W. of cor., 4 ft. dist.,
and raise a mound of earth, 3 ft. base, 2 ft. high, N. of cor.

Continue over nearly level land.

79.96 The cor. of secs. 25, 26, 35 and 36.

Land, nearly level clay flats, with low hummocks.

Soil, alkali clay, fourth rate.

Vegetation, scattered small salt brush.

Point for the cor. of secs. 1 and 2, on the N. bdy. of the Tp.,
80.00 chs. westing from the closing cor. of Tp. 6 N., Rs. 11 and 12 W.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:

T6N S1 on SE. and R12W S2 on SW. faces. Dig pits,
18x18x12 ins., SE. and SW. of cor., 4 ft. dist.

Survey of a Portion of the Subdivision of T. 7 N., R. 12 W.,

- Chains
- From this cor., the $\frac{1}{4}$ sec. cor. of sec. 35, T. 7 N., R. 12 W., S. $89^{\circ} 38' W.$, 15.68 chs. dist., and is monumented with a fir post hereinbefore described.
- S. $0^{\circ} 01' E.$, bet. secs. 1 and 2.
- Over nearly level alkali clay flats through scattered salt brush.
- 14.38 Point for the $\frac{1}{16}$ sec. cor. of secs. 1 and 2, at 100.00 chs. north from the SE. cor. of the sec.
- Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:
- T6N on N.; S1 on E.; R12W 100 on S. and $\frac{1}{16}$ S2 on W. faces. Dig pits 18x18x12 ins., N. and S. of cor., 4 ft. dist., and raise a mound of earth, 3 ft. base, 2 ft. high, W. of cor.
- 34.38 Point for the $\frac{1}{16}$ sec. cor. of secs. 1 and 2.
- Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:
- T6N on N.; S1 on E.; R12W 80 on S. and $\frac{1}{16}$ S2 on W. faces. Dig pits, 18x18x12 ins., N. and S. of cor., 4 ft. dist., and raise a mound of earth, 3 ft. base, 2 ft. high, W. of cor.
- 73.28 Ditch, 20 lks., wide, 3 ft. deep, parallels railroad.
- 73.58 Telephone line, parallels railroad.
- 74.28 Center of gravel road, bears N. $81^{\circ} 55' W.$ and S. $81^{\circ} 55' E.$
- 74.38 Point for the $\frac{1}{4}$ sec. cor. of secs. 1 and 2 falls on railroad and cannot be perpetuated.
- 74.45 Center of Southern Pacific Railroad, bears N. $81^{\circ} 55' W.$ and S. $81^{\circ} 55' E.$
- 74.88 Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:
- T6N WC on N.; S1 on E.; R12W on S. and $\frac{1}{4}$ S2 on W. faces, and raise a mound of stone, $2\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
- Continue over nearly level land.
- 75.35 Power line, parallels railroad.
- 75.98 Ditch, 20 lks. wide, 3 ft. deep, parallels railroad.
- 114.38 Point for the cor. of secs. 1, 2, 11 and 12, at a position calculated to be west of the cor. of secs. 1, 6, 7 and 12, on the E. bdy. of the Tp.
- Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:
- T6N S1 on NE.; R12W S12 on SE.; S11 on SW. and S2 on NW. faces. Dig pits, 18x18x12 ins., 4 ft. dist. in each quadrant.

Survey of a Portion of the Subdivision of T. 6 N., R. 12 W.

Chains	
40.00	<p>Land, nearly level clay flats. Soil, alkali clay, fourth rate. Vegetation, scattered small salt brush.</p> <p>West, bet. secs. 2 and 11.</p> <p>Over level alkali clay flats through scattered salt brush and low hummocks.</p> <p>Point for the $\frac{1}{4}$ sec. cor. of secs. 2 and 11.</p> <p>Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:</p> <p>$\frac{1}{4}$ S2 on N.; T6N on E.; S11 on S. and R12W on W. faces. Dig pits, 18x18x12 ins., E. and W. of cor., 4 ft. dist., and raise a mound of earth, 3 ft. base, 2 ft. high, N. of cor.</p>
80.00	<p>Continue over level land.</p> <p>Point for the cor. of secs. 2, 3, 10 and 11.</p> <p>Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:</p> <p>T6N S2 on NE.; R12W S11 on SE.; S10 on SW. and S3 on NW. faces. Dig pits, 18x18x12 ins., 4 ft. dist. in each quadrant.</p> <p>Land, level desert. Soil, alkali clay, fourth rate. Vegetation, scattered small salt brush.</p>
40.00	<p>N. $0^{\circ} 02'$ W. bet. secs. 2 and 3.</p> <p>Over nearly level clay flats, through scattered small salt brush.</p> <p>Point for the $\frac{1}{4}$ sec. cor. of secs. 2 and 3.</p> <p>Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:</p> <p>T6N on N.; S2 on E.; R12W on S. and $\frac{1}{4}$ S3 on W. faces. Dig pits, 18x18x12 ins., N. and S. of cor., 4 ft. dist., and raise a mound of earth, 3 ft. base, 2 ft. high, W. of cor.</p>
50.10	<p>Ditch, 20 lks. wide, 5 ft. deep, parallels railroad.</p>
50.62	<p>Power line, parallels railroad.</p>
51.40	<p>Center of Southern Pacific Railroad, bears N. $81^{\circ} 55'$ W. and S. $81^{\circ} 55'$ E.</p> <p>From point of intersection with center of railroad, bridge No. 717.17 bears S. $81^{\circ} 55'$ E. 0.40 chs. dist.</p>
51.67	<p>Center of gravel road, parallels railroad.</p>

Chains

- 52.32 Telephone line, parallels railroad.
- 80.00 Point for the $1/16$ sec. cor. of secs. 2 and 3.
- Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, set as follows:
- T6N on N.; S2 on E.; R12W 80 on S. and $1/16$ S3 on W. faces. Dig pits, 18x18x12 ins., N. and S. of cor., 4 ft. dist., and raise a mound of earth, 3 ft. base, 2 ft. high, W. of cor.
- 100.00 Point for the $1/16$ sec. cor. of secs. 2 and 3.
- Set a fir post 4x4 ins., 4 ft. long, 36 ins. in the ground, set as follows:
- T6N on N.; S2 on E.; R12W 100 on S. and $1/16$ S3 on W. faces. Dig pits, 18x18x12 ins., N. and S. of cor., 4 ft. dist., and raise a mound of earth, 3 ft. base, 2 ft. high, W. of cor.
- 113.95 Intersect the N. bdy. of the Tp.
- Point for the closing cor. of secs. 2 and 3.
- Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, set as follows:
- S2 on E.; CC T6N R12W on S. and S3 on W. faces; Dig pits, 18x18x12 ins., E., S. and W. of cor., 4 ft. dist.
- From this cor., the $\frac{1}{2}$ sec. cor. of sec. 34, T. 7 N., R. 12 W., bears S. $89^{\circ} 38' W.$, 15.32 chs. dist., monumented with a fir post, herebefore described.
- Land, level clay flats.
Soil, alkali clay, fourth rate.
Vegetation, scattered small salt brush.
- Point for the N. $\frac{1}{2}$ sec. cor. of sec. 2, on the N. bdy. of the Tp. and at midpoint bet. the cor. of secs. 1 and 2, and the closing cor. of secs. 2 and 3.
- Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, set as follows:
- T6N R12W $\frac{1}{2}$ S2 on S. face. Dig pits, 18x18x12 ins., E. and W. of cor., 4 ft. dist., and raise a mound of earth, 3 ft. base, 2 ft. high, S. of cor.,
- From this cor., the cor. of secs. 34 and 35, T. 7 N., R. 12 W., bears S. $89^{\circ} 38' W.$, 15.50 chs. dist.; a fir post, hereinbefore described.
- From the cor. of secs. 3, 4, 33 and 34, on the S. bdy. of the Tp. N. $0^{\circ} 02' W.$, bet. secs. 33 and 34.
- Over nearly level alkali desert land through scattered to moderate salt brush.

Survey of a Portion of The Subdivision of T. 6 N., R. 12 W.

Chains

40.00

Point for the $\frac{1}{4}$ sec. cor. of secs. 33 and 34.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:

T6N on N.; S34 on E.; R12W on S. and $\frac{1}{4}$ S33 on W. faces.
 Dig pits, 18x18x12 ins., N. and S. of cor., 4 ft. dist.,
 and raise a mound of earth, 3 ft. base, 2 ft. high, W.
 of cor.

Continue over nearly level desert land.

80.00

Point for the cor. of secs. 27, 28, 33 and 34.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:

T6N S27 on NE.; R12W S34 on SE.; S33 on SW. and S28 on
 NW. faces, with 3 notches on E. and 1 on S. edges. Dig
 pits, 18x18x12 ins., 4 ft. dist. in each quadrant. Deposit
 glass at base of post.

Land, level alkali desert.

Soil, alkali clay, fourth rate.

Vegetation, scattered to moderate salt brush.

N. 0° 02' W. bet. secs. 27 and 28.

Over level alkali desert land through scattered salt brush.

40.00

Point for the $\frac{1}{4}$ sec. cor. of secs. 27 and 28.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:

T6N on N.; S27 on E.; R12W on S. and $\frac{1}{4}$ S28 on W. faces.
 Dig pits, 18x18x12 ins., N. and S. of cor., 4 ft. dist.,
 and raise a mound of earth, 3 ft. base, 2 ft. high, W.
 of cor.

Continue over level alkali desert land.

80.00

Point for the cor. of secs. 21, 22, 27 and 28.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:

T6N S22 on NE.; R12W S27 on SE.; S28 on SW. and S21 on NW.
 faces, with 3 notches on E. and 2 on S. edges. Dig pits,
 18x18x12 ins., 4 ft. dist. in each quadrant.

Land, level clay desert.

Soil, alkali clay, fourth rate.

Vegetation, scattered salt brush.

N. 0° 02' W., bet. secs. 21 and 22.

Over level alkali clay desert through scattered small salt brush.

Survey of a Portion of the Subdivision of T. 6 N., R. 12 W.

Chains

- 40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 21 and 22.
Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribbled as follows:
T6N on N.; S22 on E.; R12W on S. and $\frac{1}{4}$ S21 on W. faces. Dig pits, 18x18x12 ins., N. and S. of cor., 4 ft. dist., and raise a mound of earth, 3 ft. base, 2 ft. high, W. of cor.
Continue over level desert land.
- 80.00 Point for the cor. of secs. 15, 16, 21 and 22.
Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribbled as follows:
T6N S15 on NE.; R12W S22 on SE.; S21 on SW. and S16 on NW. faces, with 3 notches on E. and S. edges. Dig pits, 18x18x12 ins., 4 ft. dist. in each quadrant.
Land, level clay desert.
Soil, alkali clay, fourth rate.
Vegetation, scattered small salt brush.
N. 0° 02' W., bet. secs. 15 and 16.
Over level alkali clay desert through scattered small salt brush.
- 40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 15 and 16.
Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribbled as follows:
T6N on N.; S15 on E.; R12W on S. and $\frac{1}{4}$ S16 on W. faces. Dig pits, 18x18x12 ins., N. and S. of cor., 4 ft. dist., and raise a mound of earth, 3 ft. base, 2 ft. high, W. of cor.
Continue over level desert land.
- 80.00 Point for the cor. of secs. 9, 10, 15 and 16.
Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribbled as follows:
T6N S10 on NE.; R12W S15 on SE.; S16 on SW. and S9 on NW. faces, with 3 notches on E. and 4 on S. edges. Dig pits, 18x18x12 ins., 4 ft. dist. in each quadrant.
Land, level alkali clay desert.
Soil, alkali clay, fourth rate.
Vegetation, scattered small salt brush.
N. 0° 02' W., bet. secs. 9 and 10.
Over nearly level alkali desert through scattered small salt brush.
- 40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 9 and 10.

Survey of a Portion of the Subdivision of T. 6 N., R. 12 W.

Chains

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:

T6N on N.; S10 on E.; R12W on S. and $\frac{1}{2}$ S9 on W. face.
Dig pits, 18x18x12 ins., N. and S. of cor., 4 ft. dist.,
and raise a mound of earth, 3 ft. base, 2 ft. high, W.
of cor.

Continue over level desert land.

80.00 Point for the cor. of secs. 3, 4, 9 and 10.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:

T6N S3 on NE.; R12W S10 on SE.; S9 on SW. and S4 on
NW. faces, with 3 notches on E. and 5 on S. edges.
Dig pits, 18x18x12 ins., in each sec., 4 ft. dist.

Land, level desert.
Soil, alkali clay, fourth rate.
Vegetation, scattered small salt brush.

N. 0° 02' W., bet. secs. 3 and 4.

Over nearly level alkali desert with low hummocks and through scattered small salt brush.

40.00 Point for the $\frac{1}{2}$ sec. cor. of secs. 3 and 4.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:

T6N on N.; S3 on E.; R12W on S. and $\frac{1}{2}$ S4 on W. faces.
Dig pits, 18x18x12 ins., N. and S. of cor., 4 ft. dist.,
and raise a mound of earth, 3 ft. base, 2 ft. high,
W. of cor.

Continue over nearly level desert land.

41.00 S. end of low, clay rise, bears N. and S.

60.00 E. end of abandoned railroad buildings, bears west, 2.00 chs. dist.

60.80 Road, dirt, parallels railroad.

61.80 Power line, parallels railroad.

62.63 Center of Southern Pacific Railroad, bears N. 81° 50' W. and S. 81° 50' E.

From point of intersection with center of railroad, a circular, cement structure (telephone booth), bears N. 69° 13' W., 2.25 chs. dist.

63.59 Telephone line, parallels railroad.

68.00 Leave clay rise; enter level alkali flats.

80.00 Point for the 1/16 sec. cor. of secs. 3 and 4.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:

T6N on N.; S3 on E.; R12W 80 on S. and 1/16 S4 on W. faces. Dig pits, 18x18x12 ins., N. and S. of cor., 4 ft. dist., and raise a mound of earth, 3 ft. base, 2 ft. high, W. of cor.

199.00 Point for the 1/16 sec. cor. of secs. 3 and 4.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scri as follows:

T6N on N.; S3 on E.; R12W 100 on S. and 1/16 S4 on W. faces. Dig pits, 18x18x12 ins., N. and S., of cor., 4 ft. dist., and raise a mound of earth, 3 ft. base, 2 ft. high, W. of cor.

113.17 Intersect the N. bdy. of the Tp.

Point for the closing cor. of secs. 3 and 4.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scri as follows:

S3 on E.; CC T6N R12W on S. and S4 on W. faces, with 6 notches on S. face. Dig pits, 18x18x12 ins., E., S. and W. of cor., 4 ft. dist.

From this cor., the 1/4 sec. cor. of sec. 33, T. 7 N., R. 12 W., bears S. 89° 38' W., 15.11 chs. dist. and is monumented with a fir post, hereinbefore described.

Land, nearly level alkali desert.

Soil, alkali clay, fourth rate.

Vegetation, scattered small salt brush.

From the cor. of secs. 15, 16, 21 and 22.

West, bet. secs. 16 and 21.

Over level alkali desert through widely scattered small salt brush.

40.00 Point for the 1/4 sec. cor. of secs. 16 and 21.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scri as follows:

1/4 S16 on N.; T6N on E.; S21 on S. and R12W on W. faces. Dig pits, 18x18x12 ins., E. and W. of cor., 4 ft. dist., and raise a mound of earth, 3 ft. base, 2 ft. high, N. of cor.

Continue over level desert land.

54.90 Base of low, clay ridge, bears irregularly N. and S., asc. 5 ft. on gentle E. slope.

61.90 Crest of ridge, bears N. 15° W. and S. 15° E., desc. 15 ft. over gentle W. slope.

69.90 Base of ridge, bears irregularly N. and S., thence over level clay flats.

80.00 Point for the cor. of secs. 16, 17, 20 and 21.

Survey of a Portion of the Subdivision of T. 6 N., R. 12 W.

Chains

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:

T6N S16 on NE.; R12W S21 on SE.; S20 on SW. and S17 on NW. faces, with 4 notches on E. and 3 on S. edges.
Dig pits, 18x18x12 ins., in each sec., 4 ft. dist.

Land, nearly level alkali desert.
Soil, alkali clay, fourth rate.
Vegetation, scattered small salt brush.

N. 0° 03' W., bet. secs. 16 and 17.

Over level alkali desert through scattered small salt brush.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 16 and 17.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:

T6N on N.; S16 on E.; R12W on S. and $\frac{1}{4}$ S17 on W. faces.
Dig pits, 18x18x12 ins., N. and S. of cor., 4 ft. dist.,
and raise a mound of earth, 3 ft. base, 2 ft. high,
W. of cor.

Continue over level alkali desert.

80.00 Point for the cor. of secs. 8, 9, 16 and 17.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:

T6N S9 on NE.; R12W S16 on SE.; S17 on SW. and S8 on NW. faces, with 4 notches on S. and E. edges. Dig pits, 18x18x12 ins., in each sec., 4 ft. dist.

Land, level alkali desert.
Soil, alkali clay, fourth rate.
Vegetation, scattered small salt brush.

From the cor. of secs. 9, 10, 15 and 16.

N. 89° 58' W., bet. secs. 9 and 16.

Over level alkali desert through scattered small salt brush.

40.01 Point for the $\frac{1}{4}$ sec. cor. of secs. 9 and 16.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:

$\frac{1}{4}$ S9 on N.; T6N on E.; S16 on S. and R12W on W. faces.
Dig pits, 18x18x12 ins., E. and W. of cor., 4 ft. dist.,
and raise a mound of earth, 3 ft. base, 2 ft. high,
N. of cor.

Continue over level alkali desert.

80.02 The cor. of secs. 8, 9, 16 and 17.

Chains

Land, level alkali desert.
Soil, alkali clay, fourth rate.
Vegetation, scattered small salt brush.

From the cor. of secs. 4, 5, 32 and 33, on the S. bdy. of the Tp.
N. 0° 03' W., bet. secs. 32 and 33.

Over nearly level alkali desert through scattered small salt brush.

30.80 Enter low, rolling clay hills.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 32 and 33.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribble
as follows:

T6N on N.; S33 on E.; R12W on S. and $\frac{1}{4}$ S32 on W. faces.
Dig pits, 18x18x12 ins., N. and S. of cor., 4 ft. dist.,
and raise a mound of earth, 3 ft. base, 2 ft. high, W.
of cor.

Continue over low, rolling clay hills.

64.00 E. end of small rocky point; thence enter level clay flats.

80.00 Point for the cor. of secs. 28, 29, 32 and 33.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribble
as follows:

T6N S28 on NE.; R12W S33 on SE.; S32 on SW. and S29
on NW. faces, with 4 notches on E. and 1 on S. edges.
Dig pits, 18x18x12 ins., in each sec., 4 ft. dist.

Land, nearly level desert.
Soil, alkali clay, fourth rate.
Vegetation, scattered small salt brush.

From the cor. of secs. 5, 6, 31 and 32, on the S. bdy. of the Tp.
N. 0° 04' W., bet. secs. 31 and 32.

Over nearly level alkali clay desert through scattered salt brush.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 31 and 32.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribble
as follows:

T6N on N.; S32 on E.; R12W on S. and $\frac{1}{4}$ S31 on W. faces.
Dig pits, 18x18x12 ins., N. and S. of cor., 4 ft. dist.
and raise a mound of earth, 3 ft. base, 2 ft. high, W.
of cor.

Continue over level desert land.

80.00 Point for the cor. of secs. 29, 30, 31 and 32.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribble
as follows:

Survey of a Portion of the Subdivision of T. 6 N., R. 12 W.

Chains

T6N S29 on NE.; R12W S32 on SE.; S31 on SW. and S30 on NW. faces, with 5 notches on E. and 1 on S. edges. Dig pits, 18x18x12 ins., in each sec., 4 ft. dist.

Land, level alkali desert.
Soil, alkali clay, fourth rate.
Vegetation, scattered small salt brush.

From the cor. of secs. 28, 29, 32 and 33.

West, bet. secs. 29 and 32.

Over nearly level alkali desert through scattered small salt brush.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 29 and 32.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:

$\frac{1}{4}$ S29 on N.; T6N on E.; S32 on S. and R12W on W. faces. Dig pits, 18x18x12 ins., E. and W. of cor., 4 ft. dist., and raise a mound of earth, 3 ft. base, 2 ft. high, N. of cor.

Continue over nearly level desert land.

80.00 The cor. of secs. 29, 30, 31 and 32.

Land, nearly level alkali desert.
Soil, alkali clay, fourth rate.
Vegetation, scattered small salt brush.

General Description

Township 6 North, Range 12 West, lies about 15 miles west of Lakeside, in the Great Salt Lake Desert, and is barren, alkali clay desert with small clay ridges and knolls. The soil is alkali clay, fourth rate, with scattered small salt brush and shadscale vegetation. The elevation is about 4,200 ft. above sea level.

The Southern Pacific Railroad enters the township in the northwest corner, and bears easterly through the northern portion of the township. A power line and telephone line, and a gravel road parallels the railroad through the township. There are several other unimproved roads throughout the township. No water is in this area. The drainage is in an easterly direction.

CERTIFICATE OF CADASTRAL ENGINEER

I, Boyd S. Owens, HEREBY CERTIFY upon honor that, pursuant of special instructions bearing date of the 3rd day of March, I have ~~surveyed~~ independently resurveyed the east boundary of Township 6 North, West and the south boundary of Township 7 North, Range 12 West and a portion of the south and east boundaries and a portion of the subdivision of Township 6 North, Range 12 West of the Salt Lake Meridian, in the State of Utah, which is represented in the foregoing field notes as having been executed by me and under my direction; and since said survey has been made in strict conformity with said instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in the specific manner described in the foregoing field notes.

Salt Lake City, Utah

April 5, 1962

Boyd S. Owens

Boyd S. Owens - Cadastral Engineer

CERTIFICATE OF APPROVAL

SUBMITTED FOR APPROVAL
Date AUG 31 1962

BUREAU OF LAND MANAGEMENT,
Washington, D. C., OCT 7 1966, 19

The foregoing field notes of the ~~survey of~~ survey of the east boundary of Township 6 North, Range 13 West and the south boundary of Township 7 North, Range 12 West and the survey of the south and east boundaries and a portion of the subdivision of Township 6 North, Range 12 West

executed by Boyd S. Owens, Cadastral Engineer having been critically examined and found correct, are hereby approved.

[Signature]
Acting Chief, Division of Engineers
Cadastral Engineering Staff Officer

I CERTIFY that the foregoing transcript of the field notes of the above-described surveys in _____, is a true and correct copy of the original field notes.

Cadastral Engineering Staff Officer.

Blank

Page

Blank

Page

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
ORIGINAL

FIELD NOTES

OF THE

RETRACEMENT OF THE EAST BOUNDARY (UTAH-COLORADO STATE

BOUNDARY), WITH REMONUMENTATION OF MILE CORNERS FOUND

AND THE

DEPENDENT RESURVEY OF A PORTION OF THE NORTH BOUNDARY

AND THE

SURVEY OF THE SUBDIVISIONAL LINES

OF

TOWNSHIP 22 SOUTH, RANGE 26 EAST

1966 DEC 20 11:10 AM
SALT LAKE COUNTY OFFICE
DEPT OF THE INTERIOR

Of the SALT LAKE Meridian,

In the State of UTAH

EXECUTED BY

CRAIG P. SYLVESTER

SUPERVISORY CADASTRAL SURVEYOR

Under special instructions dated MAY 28, 19 64, which provided for the surveys

included under Group Number 474, approved JUNE 3, 1964,

and assignment instructions dated JUNE 5, 19 64.

Survey commenced JUNE 19, 19 64

Survey completed JULY 17, 19 64

INDEX DIAGRAM

M.P. 134

Township 22 SOUTH, Range 26 EAST,
6

	8	M.P. 133			
6 26	5 6	4	8	2	1
23	24				
		M.P. 132			
7	8 5	9	10	11	12
20	20				
		M.P. 131 (Not Found)			
18	17 4	16	15	14	13
16	17				
		M.P. 130			
19	20	3 Signal 4 129+42.21	22	23	24
13	14				
		M.P. 129 (Not Found)			
30	29 2	28	27	26	25
10	11				
		M.P. 128			
31 9	32 1	33	34	35	36

Township 22 South, Range 26 East

CHAINS

The east boundary (Utah-Colorado State Boundary), was surveyed by J. R. Reeves in 1879, and resurveyed by A. D. Wilson in 1885. In 1933, C. F. Moore retraced this line between mile corners 124 and 129 plus 43.18 chs. in connection with the survey of Township 23 South, Range 26 East. The north boundary was surveyed by Howard W. Miller in 1910. The south and west boundaries were surveyed by C. F. Moore in 1933. The following field notes are those of the retracement of the east boundary (Utah-Colorado State Boundary), with remonumentation of mile corners found between the closing of Tps. 22 and 23 S., R. 26 E. and mile corner 134, and the resurvey of a portion of the north boundary, and the survey of the subdivisional lines of Township 22 South, Range 26 East.

The survey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1947, and special instructions dated May 28, 1964.

All lines of this survey were run by direct method where the lines were accessible; lines inaccessible were run by triangulation or traverse methods. Distances to topography on lines run by traverse or triangulation methods are approximately as scaled from U.S.G.S. topographic sheet "Coates Creek, Utah-Colorado." The details of such traverses or triangulations have been thoroughly checked and verified, and in order to simplify the record the diagrams and reductions are omitted from these field notes.

The lines of this survey were determined by reference to true meridians established on line by observations on Polaris and altitude observations on the sun. The lines were carried forward by sustained angulation being supplemented by other altitude observations on the sun taken throughout the progress of this survey.

The geographic position for the southeast corner of the township is at latitude $38^{\circ}50'27''$ N. and longitude $109^{\circ}03'17''$ W., as scaled from U.S.G.S. topographic sheet "Coates Creek, Utah-Colorado".

The magnetic declination was read at several stations throughout the township and the average of these readings was found to be 15° East.

Retracement of the E. Bdy. (Utah-Colorado State Boundary), with Remonumentation of Mile Cors. Found. T. 22 S., R. 26 E. Salt Lake Meridian.

Retracement of the Resurvey Executed by A. D. Wilson in 1885.

Beginning at the closing cor. of Tps. 22 and 23 S., R. 26 E., on the Utah-Colorado State Boundary, monumented with an iron post, 3 ins. diam., set, mkd. and witnessed as described in the official record of the 1933 survey.

N. $1^{\circ}57'$ E., along the 128th mile and the E. bdy. of sec. 32.

Retracement of the E. Bdy. (Utah-Colorado State Boundary),
with Remonumentation of Mile Cors. Found. T. 22 S., R. 26 E.

CHAINS	
	Over mountainous land through dense pinon and juniper timber. Asc. 70 ft. over S. slope.
11.00	Ridge, bears NW. and SE.; desc. 300 ft. over steep NE. slope.
21.00	Base of steep descent, bears NW. and SE.; desc. 85 ft. over gentle N. slope. Leave timber, bears NE. and SW.
36.40	Trail road, bears NW. and SE.
40.05	Point for the E. $\frac{1}{4}$ sec. cor. of sec. 32, hereinafter described.
	Desc. 80 ft. over gentle NW. slope.
41.00	Enter dense pinon and juniper timber, bears E. and W.
52.00	Ryan Creek, drains NW.; asc. 80 ft. over SW. slope.
63.45	Small spur, slopes W.; desc. 30 ft. over NW. slope.
69.00	Base of descent, slopes W.; asc. 10 ft. along W. slope.
70.20	Mile cor. 128 of the 1885 resurvey, on the Utah-Colorado State Boundary, monumented with a sandstone, 16x12x3 ins., firmly set in a small mound of stone, and plainly mkd. 128U on W. face and C on E. face. (This mile cor. was not found in the 1933 retracement).
	At the mile cor. point
	Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.
	128M UT COLO 1964
	From which
	A pinon, 12 ins. diam., bears N. 35° E. 83 lks. dist., mkd. 128M C.
	A juniper, 6 ins. diam., bears S. 10° W., 14 lks. dist., mkd. 128M U.
	Bury original mile cor. stone alongside iron post.
	Land, mountainous. Soil, rocky loam. Timber, dense pinon and juniper. Undergrowth, sagebrush and scattered oak brush.
	N. $1^{\circ}57'$ E., along the 129th mile.
	Over broken and mountainous land through dense pinon and juniper timber and scattered undergrowth. Asc. 90 ft. along W. slope.
9.90	Point for the closing cor. of secs. 29 and 32, hereinafter described.
	Thence along the E. bdy. of sec. 29.
	By triangulation, asc. about 40 ft. over SW. slope.

Retracement of the E. Bdy. (Utah-Colorado State Boundary),
with Remonumentation of Mile Cors. Found. T. 22 S., R. 26 E.

CHAINS	
19.90	Spur, slopes W.; desc. about 50 ft. over NW. slope.
27.00	Draw, drains W.; asc. about 500 ft. over steep and broken S. slope.
44.00	Point of spur, slopes S. End triangulation; asc. 40 ft. along W. slope.
49.90	Point for the E. $\frac{1}{2}$ sec. cor. of sec. 29, hereinafter described. Asc. 65 ft. along W. slope.
60.15	Top of ascent slopes W., thence by trinagulation; desc. about 250 ft. over NW. slope.
74.15	Draw, drains SW.; asc. about 80 ft. over SE. slope.
78.21	Point for mile cor. 129 at proportionate dist. falls in wash draining SW. and is not monumented; no trace of the original mile cor. found. End triangulation. Land, mountainous and broken. Soil, rocky loam. Timber, dense pinon and juniper. Undergrowth, scattered sagebrush and oak brush.
	N. 1°57' E., along the 130th mile. Over broken and mountainous land through dense pinon and juniper timber and scattered undergrowth.
0.20	Set an unmarked cedar post, 6 ft. long, 8 ins. diam., in a mound of stone, 3 ft. base, 2 ft. high, for a reference marker to mile cor. 129. Thence by triangulation; asc. about 160 ft. over SE. slope.
11.69	Point for the closing cor. of secs. 20 and 29, hereinafter described. Thence along the E. bdy. of sec. 20.
11.95	Small wash, drains S. 20° E.; asc. about 120 ft. over S. slope.
20.45	Base of steep ascent, bears E. and W.; asc. about 440 ft. over steep and ledgy S. slope.
41.21	The closing cor. for Tps. 13 and 14 S., R. 104 W., 6th Principal Meridian, Colorado, monumented with a sandstone, 8x6x4 ins. above ground, mkd. 6 notches on N., S. and E. edges.
42.21	A signal, on top of white sandstone bluff, found in 1885 at 129 miles plus 43.18 chs., monumented with a sandstone boulder, 6x4x3 $\frac{1}{2}$ ft., set in large mound of stone. End triangulation. On S. side of boulder Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., on solid sandstone, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

Retracement of the E. Bdy. (Utah-Colorado State Boundary)
with Remonumentation of Mile Cors. Found. T. 22 S. R. 26 E.

CHAINS

AP
UTAH | COLORADO
129 + 43.18

1964

- N. 0°27' E., beginning new measurement.
Desc. 20 ft. over N. slope.
- 9.58 Point for the E. $\frac{1}{4}$ sec. cor. of sec. 20, hereinafter described.
Desc. 45 ft. over N. slope.
- 14.50 Small draw, drains NW.; desc. 30 ft. over NW. slope.
- 30.70 Low rim, bears NW. and curves S.; desc. 65 ft. along E. slope.
- 36.25 Point for mile cor. 130 at proportionate dist.; no trace of the original mile cor. found.
Set an unmarked cedar post, 9 ft. long, 4 ins. diam., in mound of stone, 5 ft. base, 3 ft. high.
Land, mountainous and broken.
Soil, rocky loam.
Timber, dense pinon and juniper.
Undergrowth, scattered sagebrush and oak brush.
-
- N. 0° 27' E., along the 131st mile.
Over broken and mountainous land through dense pinon and juniper timber and scattered undergrowth. Desc. 120 ft. along E. slope.
- 13.43 Point for the closing cor. of secs. 17 and 20, hereinafter described.
Thence along the E. bdy. of sec. 17
By triangulation; desc. about 400 ft. along broken E. slope.
- 40.20 Renegade Creek, with small stream of water, drains W.; asc. about 280 ft. over ledgy S. slope.
- 53.32 Point for the E. $\frac{1}{4}$ sec. cor. of sec. 17, hereinafter described. End triangulation.
Asc. 60 ft. over ledgy SW. slope.
- 55.75 Slope changes; asc. 100 ft. over ledgy S. slope.
- 71.85 Ridge, bears E. and W.; thence by triangulation; desc. about 80 ft. over N. slope.
- 78.75 Mile cor. 131 of the 1885 resurvey, on the Utah-Colorado State Boundary, monumented with a sandstone, 20x5x4 ins., firmly set and plainly mkd. 131M U on W. face and C on E. face.
At the mile cor. point

Retracement of the E. Bdy. (Utah-Colorado State Boundary),
 With Remonumentation of Mile Cors. Found. T. 22 S., R. 26 E.

CHAINS	
	<p>Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">131M UT COLO 1964</p> <p>Bury original mile cor. stone and a cedar post alongside iron post.</p> <p>Land, broken and mountainous. Soil, rocky loam. Timber, dense pinon and juniper. Undergrowth, scattered sagebrush and oak brush.</p> <hr/> <p>N. 0°27' E., along the 132nd mile.</p> <p>Over broken and mountainous land through dense pinon and juniper timber and scattered undergrowth. By triangulation; desc. about 200 ft. over broken N. slope.</p> <p>12.00 Wash, in draw, drains W.; asc. about 20 ft. along W. slope.</p> <p>13.50 Trail road, bears irregularly SE. and N. 10° W.</p> <p>14.46 Point for the closing cor. of secs. 8 and 17, hereinafter described.</p> <p>Thence along the E. bdy. of sec. 8.</p> <p>24.50 Spur, slopes NW.; desc. about 40 ft. over NW. slope.</p> <p>31.45 Draw, drains NW.; desc. about 80 ft. along W. slope.</p> <p>52.40 Spur, slopes NW.; continue along W. slope.</p> <p>54.44 Point for the E. ¼ sec. cor. of sec. 8, hereinafter described.</p> <p>Desc. about 80 ft. along W. slope.</p> <p>61.40 Slope changes; desc. about 150 ft. over NW. slope.</p> <p>70.40 Small draw, drains W.; asc. about 150 ft. over S. slope.</p> <p>80.07 Mile cor. 132 of the 1885 resurvey, on the Utah-Colorado State Boundary, monumented with a sandstone, 24x12x4 ins. firmly set and plainly mkd. 132M U on W. face and C on E. face. End triangulation.</p> <p>At the mile cor. point</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.</p> <p style="text-align: center;">132M UT COLO 1964</p> <p>Bury the original mile cor., and set a steel fence post in a mound of stone alongside of post.</p> <p>Mile cor. falls on NW. end of low sandstone outcropping, on top of high spur, slopes W.</p>

204

Retracement of the E. Bdy. (Utah-Colorado State Bdy.) with
 Remonumentation of Mile Cors. Found. T. 22 S. R. 26 E.

CHAINS

Land, broken and mountainous.
 Soil, rocky loam.
 Timber, dense pinon and juniper.
 Undergrowth, scattered oak and service brush.

N. 0°29' E., along the 133rd mile.

Over broken and mountainous land through dense timber and scattered undergrowth; descend 145 ft. over steep N. slope.

- 13.00 Trail road, bears nearly E. and W.
- 14.35 Point for the closing cor. of secs. 5 and 8, hereinafter described.
 Thence along E. bdy. sec. 5.
 Desc. 135 ft. along steep and rocky N. slope.
- 17.90 Base of steep descent, bears E. and W.; desc. 225 ft. over N. slope.
- 46.35 Same trail road, bears NW. and SE.
- 47.10 Spring Canyon with small stream of water, flows about N. 60° W.; ascend 65 ft. over S. slope.
- 53.70 Low Spur, slopes W.; desc. 5 ft. over N. slope.
- 54.00 Old drift fence, bears about N. 10° E. and S. 20° W.
- 54.35 Point for the E. $\frac{1}{2}$ sec. cor. of sec. 5, hereinafter described.
- 61.10 Small wash, drains SW.; asc. 30 ft. along W. slope.
- 66.00 Trail road, bears N. 60° W. and S. 60° E.
- 71.60 Base of steep ascent, bears E. and NW.; asc. 145 ft. over ledgy S. slope.
- 75.92 Solid ridge of rock, about 50 lks. wide, bears E., and extends W. for about 4 chs. dist. to end; no trace of the Wilson, "1885" witness mile cor. reported at 74.20 chs. could be found. Set a steel fence post on bedrock in a mound of stone for a line point.
- 79.41 Point for the 133 mile cor. at proportionate dist. No trace of the original monument was found.
 Set an unmarked cedar post, 6 ft. long, 8 ins. diam., 18 ins. in the ground, and in a mound of stone, 3 ft. base, 1 ft. high.

Land, broken and mountainous.
 Soil, rocky loam.
 Timber, dense pinon and juniper.
 Undergrowth, sage and oak brush.

N. 0°29' E., along the 134th mile.

Over mountainous land through dense pinon and juniper timber and scattered undergrowth; desc. 30 ft. over N. slope.

Retracement of the E. Bdy. (Utah-Colorado State Boundary)
 With Remonumentation of Mile Cors. Found. T. 22 S., R. 26 E.

CHAINS

- 7.70 Wash, 20 lks. wide, 3 ft. deep, drains W.; asc. 30 ft. over SW. slope.
- 10.20 Top of ascent, slopes W.; desc. 10 ft.
- 14.50 Wash, 10 lks. wide, 2 ft. deep, drains SW.; asc. 15 ft.
- 19.19 Point for the closing cor. of Tps. 21 and 22 S., R. 26 E. hereinafter described.
 Thence along the E. bdy. sec. 32, T. 21 S., R. 26 E.
 By triangulation; asc. about 120 ft. over rocky SW. slope
- 25.20 Point of rocky spur, slopes W.; desc. about 120 ft. over NW. slope.
- 32.00 Draw, drains W.; asc. about 80 ft., entering scattered timber.
- 44.00 Spur, slopes N. 65° W.; end triangulation; desc. 50 ft. over N. slope.
- 53.20 Draw, drains N. 60° W.; asc. 60 ft.
- 69.70 Spur, slopes NW.; desc. 25 ft. over N. slope.
- 79.41 Mile Cor. 134 of the "1885" resurvey, on the Utah-Colorado State Boundary, monumented with a sandstone, 16x10x4 ins., loosely set, marked 134 on S. face and 1885 on N. face, no other mks. could be identified, unwitnessed.
 At cor. point
 Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap marked

134 M
 UT|COLO
 1964

 Bury original cor. at base of post, and raise a mound of stone, 3 ft. base 2 ft. high, S. of cor.
 A wire fence, bearing about N. 1° E. and S. 1° W., bears 11 lks. dist. W. of the mile cor.
 From this mile cor., the closing cor. of secs. 29 and 32, T. 21 S., R. 26 E., monumented by an iron post, 2 ins. diam., set, mkd. and witnessed as described in the official "1910" record, bears N. 1°36' E., 20.25 chs. dist. (record bearing and dist. N. 0° 33' E., 20.35 chs.)
 Land, mountainous.
 Soil, rocky loam.
 Timber, dense juniper and pinon on S. portion, scattered on N. portion.
 Undergrowth, sagebrush.

Dependent Resurvey of a Portion of the North Boundary T. 22 S., R. 26 E.

Reestablishment of the Survey Executed by Howard W. Miller in 1910

Dependent Resurvey of Portion of N. Bdy., T. 22 S., R. 26 E.

CHAINS	
	East, bet. secs. 5 and 32.
	Over mountainous land, through dense pinon and juniper; asc. 30 ft. over NW. slope.; by triangulation.
4.00	Small spur, slopes N.; desc. about 80 ft.
12.50	Spring Canyon, drains N.; asc. about 150 ft. over NW. slope.
26.00	Spur, slopes NW.; desc. 30 ft.
30.00	Small draw, drains NW.; asc. about 100 ft. over SW. slope.
40.00	The $\frac{1}{4}$ sec. cor. of secs. 5 and 32, monumented by an iron post, 1 in. diam., set, mkd. and witnessed as described in the official record.
	East, beginning new measurement.
	By triangulation; desc. about 80 ft. over NE. slope.
10.00	Draw, drains NW.; asc. about 80 ft. over SW. slope.
19.00	Trail road, bears about N. 15° E., and S. 15° W.; asc. 100 ft.
40.00	Point for the 80 $\frac{1}{16}$ sec. cor. of sec. 5, on N. bdy. of Tp. at 80.00 chs. easting from cor. secs. 5, 6, 31 and 32.
	Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 22 ins. in the ground, with brass cap mkd.
	$\frac{1}{16}$ S5 80 T22S R26E 1964
	Raise a mound of stone, 3 ft. base, around cor.
	Thence by chaining. Asc. SW. slope 65 ft. to State line.
43.21	The "1910" closing cor. of Ts. 21 and 22 S., R. 26 E., monumented by an iron post, 3 ins. diam., set, mkd. and witnessed as described in the official record of T. 21 S., R. 26 E. This cor. is found not to be on the State line as determined by retracement of State line hereinbefore described, therefore, this point now functions as an amended monument only. Destroy all marks on brass cap and add letters A M.
46.40	Intersect the Utah-Colorado State Boundary, as defined by line between Mile Cqrs. 132 and 134.
	Point for closing cor. of Ts. 21 and 22 S., R. 26 E.
	Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

Dependent Resurvey of Portion of N. Bdy., T. 22 S., R. 26 E.

CHAINS

	T21S	C
U	R26E	O
T	CC S 32	L
A	S 5	O
H	T22S	R
	R26E	A
		D
		O
	1964	

Set a steel fence post alongside and raise a mound of stone around cor.

From this cor., the Mile Cor. 134, on the Utah-Colorado State Boundary, bears N. 0° 29' E., 60.22 chs. dist., hereinbefore described.

Land, mountainous.
Soil, rocky loam.
Timber, dense pinon and juniper.
Undergrowth, scattered sagebrush.

Survey of the Subdivision, T. 22 S., R. 26 E.

From the cor. of secs. 31 and 32, on the S. bdy. of the Tp. monumented with an iron post, 2 ins. diam., set, mkd. and witnessed as described in the official record of the 1933 survey.

N. 0° 01' E.; bet. secs. 31 and 32.

Over mountainous land through dense pinon and juniper timber. Asc. 50 ft. over SW. slope.

- 4.25 Spur, slopes SE.; desc. 20 ft. over NE. slope.
- 10.90 Trail road, in bottom of draw, bears NW. and SE.; draw drains SE.; asc. 70 ft. over SW. slope.
- 13.50 Leave timber, bears NE. and SW.; enter sagebrush clearing.
- 34.70 Enter dense pinon and juniper timber, bears NW. and SE.
- 40.00 Point for the ¼ sec. cor. of secs. 31 and 32.

Set an iron post, 30 ins. long, 2½ ins. diam., 14 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T22S	R26E
	¼
S31	S32
	1964

From which

A juniper, 4 ins. diam., bears N. 50° E., 21 lks. dist., mkd. ¼ S32 BT.

A juniper, 8 ins. diam., bears S. 50° W., 28 lks. dist., mkd. ¼ S31 BT.

Survey of the Subdivision, T. 22 S. R. 26 E.

CHAINS

- 41.00 Low ridge, bears N. 75° W. and S. 75° E.; desc. 60 ft. over broken N. slope.
- 61.55 Spur, slopes NW., thence by triangulation; desc. about 100 ft. over NE. slope.
- 80.00 Point for the cor. of secs. 29, 30, 31 and 32. End triangulation.

Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground, and in a collar of stone, with brass cap mkd.

T22S R26E

S30 | S29

S31 | S32

1964

From which

A juniper, 18 ins. diam., bears N. 77° E., 40 lks. dist., mkd. T22S R26E S29 BT.

A pinon, 6 ins. diam., bears S. 32° 15' E., 61 lks. dist., mkd. T22S R26E S32 BT.

A juniper, 4 ins. diam., bears S. 86° 45' W., 32 lks. dist., mkd. T22S R26E S31 BT.

A juniper, 12 ins. diam., bears N. 5° 15' W., 46 lks. dist., mkd. T22S R26E S30 BT.

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Land, mountainous.

Soil, rocky loam.

Timber, dense pinon and juniper.

Undergrowth, dense sagebrush in clearing.

From the cor. of secs. 25, 30, 31 and 36, on the W. bdy. of the Tp., monumented with an iron post, 2 ins. diam., set, mkd. and witnessed as described in the official record of the 1933 survey.

N. 89° 59' E., bet. Secs. 30 and 31.

Over mountainous land through dense pinon and juniper timber. By triangulation; along N. slope.

20.75 Draw, drains NW.; asc. about 100 ft. over W. slope.

39.88 Point for the ¼ sec. cor. of secs. 30 and 31. End triangulation.

Set an iron post, 30 ins. long, 2½ ins. diam., on solid rock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T22S R26E

¼ S30

S31

1964

Survey of the Subdivision, T. 22 S., R. 26 E.

CHAINS	
	<p>From which</p> <p>A juniper, 10 ins. diam., bears S. 50° E., 22 lks. dist., mkd. $\frac{1}{4}$ S31 BT.</p> <p>A juniper, 8 ins. diam., bears N. 60° W., 22 lks. dist., mkd. $\frac{1}{4}$ S30 BT.</p> <p>Asc. 40 ft. over gentle SW. slope.</p>
62.05	Junction of trail roads, with road bearing N. 20° E. and S. 20° W., and road bearing irregularly E.
64.75	Spur, slopes NW.; desc. 80 ft. over E. slope.
79.76	The cor. of secs. 29, 30, 31 and 32.
	<p>Land, mountainous. Soil, rocky loam. Timber, dense pinon and juniper. Undergrowth, scattered sagebrush.</p>
	<p>East, bet. secs. 29 and 32.</p> <p>Over mountainous land through dense pinon and juniper timber. Desc. E. slope.</p>
0.20	Wash, 10 lks. wide, 3 ft. deep, drains NE., thence along N. slope.
5.00	Leave timber, bears N. and S.
6.00	Trail road, bears about N. 55° W. and S. 55° E.
24.00	Spur, slopes N.; desc. 20 ft. over gentle NE. slope.
25.00	Enter timber, bears NW. and SE.
32.20	Desc. 75 ft. along S. slope, 1.00 ch. above wash, drains E.
40.00	Point for the $\frac{1}{4}$ sec. cor. of secs. 29 and 32.
	<p>Set an iron post, 30 ins. long, 2$\frac{1}{2}$ ins. diam., 22 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T22S R26E $\frac{1}{4}$ $\frac{S29}{S32}$ 1964</p>
	<p>From which</p> <p>A pinon, 18 ins. diam., bears S. 36°30' E., 19 lks. dist., mkd. $\frac{1}{4}$ S32 BT.</p> <p>A pinon, 14 ins. diam., bears N. 9°15' W., 37 lks. dist., mkd. $\frac{1}{4}$ S29 BT.</p> <p>Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.</p> <p>Thence by triangulation; desc. about 50 ft. along N. side of wash draining E.</p>
49.00	Ryan Creek, drains NW.; asc. about 200 ft. over SW. slope

Survey of the Subdivision, T. 22 S., R. 26 E.

CHAINS

74.33 End triangulation.

80.95 Intersect the Utah-Colorado State Boundary.

Point for the closing cor. of secs. 29 and 32.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 22 ins. in the ground, with brass cap mkd.

T22S
R26E
UT C S29 | COLO
C S32 |
1964

From which

A juniper, 6 ins. diam., bears S. $57^{\circ}45'$ W., 34 lks. dist., mkd. T22S R26E S32 BT.A juniper, 6 ins. diam., bears N. $46^{\circ}45'$ W., 21 lks. dist., mkd. T22S R26E S29 Bt.Raise a mound of stone, 3 ft. base, $2\frac{1}{2}$ ft. high, W. of cor.From this cor., mile post 128, on the Utah-Colorado State Boundary, bears S. $1^{\circ}57'$ W., 9.90 chs. dist., monumented with an iron post, $2\frac{1}{2}$ ins. diam., hereinbefore described

Land, mountainous.

Soil, rocky loam.

Timber, dense pinon and juniper.

Undergrowth, scattered sagebrush and oak brush.

Point for the E. $\frac{1}{2}$ sec. cor. of sec. 32, on the E. bdy. of the Tp. (Utah-Colorado State Boundary), at mid point bet. the closing cor. of secs. 29 and 32, and the closing cor. of Tps 22 and 23 S., R. 26 E.Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T22S
R26E
UT $\frac{1}{2}$ | COLO
S32 |
1964

Set a cedar post, 6 ins. diam., 6 ft. above ground, alongside iron post.

From this cor., mile cor. 128, on the Utah-Colorado State Boundary, bears N. $1^{\circ}57'$ E., 30.15 chs. dist., monumented with an iron post, $2\frac{1}{2}$ ins. diam., hereinbefore described.

From the cor. of secs. 29, 30, 31 and 32.

N. $0^{\circ}01'$ E., bet. secs. 29 and 30.

Survey of the Subdivision, T. 22 S., R. 26 E.

CHAINS	
	Over mountainous land through dense pinon and juniper timber and scattered undergrowth. Desc. 90 ft. over NE. slope.
3.00	Trail road, bears about S. 55 E. and SW. curving W.
40.00	Point for the $\frac{1}{2}$ sec. cor. of secs. 29 and 30. Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 16 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd. T22S R26E $\frac{1}{2}$ S30 S29 1964 From which A pinon, 8 ins. diam., bears N. $71^{\circ}15'$ E., 39 lks. dist., mkd. $\frac{1}{2}$ S29 BT. A juniper, 16 ins. diam. bears S. $38^{\circ}30'$ W., 17 lks. dist., mkd. $\frac{1}{2}$ S30 BT. Thence by triangulation; desc. about 240 ft. over broken NE. slope.
61.00	Ryan Creek, with small stream of water, drains NW.; asc. about 600 ft. over steep and broken SW. slope.
78.40	Small, ledgy spur, slopes SW. End triangulation.
78.50	Point selected for the witness cor. of secs. 19, 20, 29 and 30. Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins. in the ground, and in a mound of stone, 4 ft. base to top, with brass cap mkd. T22S R26E W C <u>S19 S20</u> S30 S29 1964
80.00	Point for the cor. of secs. 19, 20, 29 and 30 falls on inaccessible ledges and cannot be perpetuated. Land, mountainous and broken. Soil, rocky loam. Timber, dense pinon and juniper. Undergrowth, sacttered sagebrush and oak brush.
	From the cor. of secs. 19, 24, 25 and 30, on the W. bdy. of the Tp., monumented with an iron post, 2 ins. diam., set, mkd. and witnessed as described in the official record of the 1933 survey. N. $89^{\circ}58'$ E., bet. secs. 19 and 30. Over broken and mountainous land through dense pinon and juniper timber and scattered undergrowth. Asc. 95 ft. over gentle W. slope.
19.00	Trail road, bears NW. and SE.; desc. 90 ft. over NE. slope.

Survey of the Subdivision, T. 22 S., R. 26 E.

CHAINS	
34.90	Same road, bears NE. and SW.
38.50	Same road, bears NW. and SE.
39.00	Ryan Creek, drains N. 75° W.; asc. 50 ft. over SW. slope.
39.87	Point for the $\frac{1}{4}$ sec. cor. of secs. 19 and 30. Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd. T22S R26E $\frac{1}{4}$ $\frac{S19}{S30}$ 1964
	Set a cedar post, 10 ins. diam., 6 ft. high, alongside iron post. Cor. located on N. bank of Ryan Creek. Thence by triangulation; asc. about 700 ft. over steep and broken SW. slope.
79.74	True point for the cor. of secs. 19, 20, 29 and 30, from which the witness cor. bears S. 0°01' W., 1.50 chs. dist., hereinbefore described. Land, broken and mountainous. Soil, rocky loam. Timber, dense pinon and juniper. Undergrowth, sagebrush and oak brush.
	East, bet. secs. 20 and 29. Over broken and mountainous land through dense pinon and juniper timber and scattered undergrowth. By triangulation; asc. about 240 ft. along broken and rocky S. slope.
33.20	Point of rocky spur, slopes SW. about 2.50 chs. to end. End triangulation; thence along rocky S. slope.
40.00	Point for the $\frac{1}{4}$ sec. cor. of secs. 20 and 29. Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., on solid rock, and in a mound of stone, 4 ft. base to top, with brass cap mkd. T22S R26E $\frac{1}{4}$ $\frac{S20}{S29}$ 1964
	Thence by triangulation; continue along S. slope.
50.00	Head of draw, drains S. 75° W.; asc. about 250 ft. over broken W. slope.
75.00	Spur, slopes S. End triangulation; desc. 80 ft. over SE. slope.
83.56	Intersect the Utah-Colorado State Boundary.

Survey of the Subdivision, T. 22 S., R. 26 E.

CHAINS

Point for the closing cor. of secs. 20 and 29.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 8 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T22S
R26E
UT C $\frac{S20}{S29}$ | COLO
1964

From this cor., a Signal at 129 miles plus 43.18 chs., on the Utah-Colorado State Boundary, bears N. $1^{\circ} 57' E.$, 30.52 chs. dist., monumented with an iron post, $2\frac{1}{2}$ ins. diam., hereinbefore described.

Land, broken and mountainous.
Soil, rocky loam.
Timber, dense pinon and juniper.
Undergrowth, scattered sagebrush and oak brush.

Point for the E. $\frac{1}{4}$ sec. cor. of sec. 29 on the E. bdy. of the Tp. (Utah-Colorado State Boundary), at mid point bet. the closing cor. of secs. 20 and 29, and the closing cor. of secs. 29 and 32.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 8 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T22S
R26E
UT $\frac{1}{4}$ | COLO
S29
1964

From which

A pinon, 10 ins. diam., bears West, 5 lks. dist., mkd. T22S R26E $\frac{1}{4}$ S29 BT.

From this cor., mile cor. 128, on the Utah-Colorado State Boundary, bears S. $1^{\circ} 57' W.$, 49.90 chs. dist., monumented with an iron post, $2\frac{1}{2}$ ins. diam., hereinbefore described.

From the true point for the cor. of secs. 19, 20, 29 and 30, from which the witness cor. bears S. $0^{\circ} 01' W.$, 1.50 chs. dist., hereinbefore described.

N. $0^{\circ} 01' E.$, bet. secs. 19 and 20.

Over broken and mountainous land through dense pinon and juniper timber and scattered undergrowth. By triangulation; asc. about 240 ft. over broken S. slope.

18.00 Spur, slopes SW.; desc. about 80 ft. over NW. slope.

28.00 Head of draw, drains SW.; asc. about 90 ft. over S. slope.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 19 and 20. End triangulation.

Survey of the Subdivision, T. 22 S., R. 26 E.

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T22S R26E

$$\begin{array}{c} \frac{1}{2} \\ \hline S19 | S20 \\ 1964 \end{array}$$

From which

A juniper, 16 ins. diam., bears N. 86° E., 64 lks. Dist., mkd. $\frac{1}{2}$ S20 BT.

A juniper, 12 ins. diam., bears N. 89° W., 9 lks. dist., mkd. $\frac{1}{2}$ S19 BT.

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Cor. located on large flat spur, slopes W.

Thence by triangulation; desc. about 150 ft. over NW. slope.

76.00

Draw, drains SW.; asc. about 30 ft. over SE. slope.

80.00

Point for the cor. of secs. 17, 18, 19 and 20. End triangulation.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 16 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T22S R26E

$$\begin{array}{c} \frac{1}{2} \\ \hline S18 | S17 \\ \hline S19 | S20 \\ 1964 \end{array}$$

From which

A juniper, 8 ins. diam., bears N. 41° E., 61 lks. T22S R26E S17 BT.

A juniper, 8 ins. diam., bears S. 28° E., 45 lks. dist., mkd. T22S R26E S20 BT.

A juniper, 14 ins. diam., bears S. $29^{\circ}45'$ W., 39 lks. dist., mkd. T22S R26E S19 BT.

A juniper, 10 ins. diam., bears N. $31^{\circ}30'$ W., 53 lks. mkd. T22S R26E S18 BT.

Land, broken and mountainous.

Soil, rocky loam.

Timber, dense pinon and juniper.

Undergrowth, sagebrush and oak brush.

From the cor. of secs. 13, 18, 19 and 24, on the W. bdy. of the Tp., monumented with an iron post, 2 ins. diam., set, mki. and witnessed as described in the official record of the 1933 survey.

N. $89^{\circ}44'$ E., bet. secs. 18 and 19.

Over broken and mountainous land through dense pinon and juniper timber and scattered undergrowth, By

Survey of the Subdivision, T. 22 S., R. 26 E.

CHAINS	
	triangulation; asc. about 400 ft. over steep and broken W. slope.
17.50	Top of ledge, 50 ft. high, bears N. and S. End triangulation; asc. 205 ft. over SW. slope.
33.70	Spur, slopes NW.; desc. 35 ft. over E. slope.
36.15	Draw, drains N. about 15.00 chs., thence W.; asc. 50 ft. over W. slope.
39.92	Point for the $\frac{1}{4}$ sec. cor. of secs. 18 and 19. Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd. $\begin{array}{r} \text{T22S R26E} \\ \frac{1}{4} \frac{\text{S18}}{\text{S19}} \\ 1964 \end{array}$ From which A juniper, 12 ins. diam., bears N. $16^{\circ}30'$ E., 45 lks. dist., mkd. $\frac{1}{4}$ S18 BT. A juniper, 10 ins. diam., bears S. 52° E., 29 lks. dist., mkd. $\frac{1}{4}$ S19 BT. Asc. 65 ft. over W. slope.
43.45	Spur, slopes NW.; desc. 20 ft. over NE. slope.
44.20	Head, of draw, drains NW.; asc. 125 ft. over broken NW. slope.
63.60	Ridge, bears NE. and SW.; desc. 5 ft. over SE. slope.
66.10	Top of sandstone ledge, 100 ft. high, bears NE. and SW., thence by triangulation; desc. about 240 ft. over broken SE. slope.
79.84	The cor. of secs. 17, 18, 19 and 20. Land, broken and mountainous. Soil, rocky loam. Timber, dense pinon and juniper. Undergrowth, scattered sagebrush.
40.00	East, bet. secs. 17 and 20. Over broken and mountainous land through dense pinon and juniper timber and scattered undergrowth. By triangulation. asc. about 240 ft. over W. slope. Point for the $\frac{1}{4}$ sec. cor. of secs. 17 and 20. End triangulation. Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd. $\begin{array}{r} \text{T22S R26E} \\ \frac{1}{4} \frac{\text{S17}}{\text{S20}} \\ 1964 \end{array}$

Survey of the Subdivision, T. 22 S., R. 26 E.

CHAINS

from which

A juniper, 8 ins. diam., bears N. 12° E., 54 lks. dist., mkd. $\frac{1}{4}$ S17 BT.

A juniper, 14 ins. diam., bears S. 14°30' W., 48 lks. dist., mkd. $\frac{1}{4}$ S20 BT.

By triangulation; asc. about 240 ft. over broken NW. slope.

53.00 Spur, slopes N.; desc. about 160 ft. over NE. slope.

63.00 Draw, drains N.; asc. about 360 ft. over steep and broken W. slope.

75.00 Spur, slopes N.; end triangulation; desc. 80 ft. over NE. slope.

80.00 Point for the 1/16 sec. cor. of sec. 17 only, at 80.00 chs. easting from the cor. of secs. 17, 18, 19 and 20. Not monumented.

Desc. 80 ft. over NE. slope.

84.89 Intersect the Utah Colorado State Boundary.

Point for the closing cor. of secs. 17 and 20.

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

	T22S	
	R26E	
UT	S17	COLO
	S20	
	1964	

Cor. falls in small clearing on E. slope.

From this cor., a Signal, at 129 miles plus 43.18 chs., on the Utah-Colorado State Boundary, bears S. 0°27' W., 49.68 chs. dist., monumented with an iron post, 2½ ins. diam., hereinbefore described.

Land, broken and mountainous.

Soil, rocky loam.

Timber, dense pinon and juniper.

Undergrowth, scattered sagebrush and oak brush.

Point for the E. ½ sec. cor. of sec. 20, on the E. bdy. of the Tp. (Utah-Colorado State Boundary), at mid-point bet. the closing cor. of secs. 17 and 20, and the closing cor. of secs. 20 and 29.

Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

	T22S	
	R26E	
	½	
UT	S20	COLO
	1964	

Survey of the Subdivision, T. 22 S., R. 26 E.

CHAINS

Cor. falls in small clearing on large spur.

From this cor., a Signal, at 129 miles plus 43.18 chs., on the Utah-Colorado State Boundary, bears S. 0°27' W., 9.58 chs. dist., monumented with an iron post, 2½ ins. diam., hereinbefore described.

From the cor. of secs. 17, 18, 19 and 20.

N. 0°01' E., bet. secs. 17 and 18.

Over broken and mountainous land through dense pinon and juniper timber and scattered undergrowth. By triangulation; asc. about 250 ft. over SE. slope.

17.00 Ridge, bears NE. and SW.; continue by triangulation; desc. about 720 ft. over steep and broken N. slope.

40.00 Point for the ¼ sec. cor. of secs. 17 and 18. End triangulation.

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T22S R26E

¼

S18|S17

1964

From which

A juniper, 14 ins. diam., bears S. 83° E., 6 lks. dist., mkd. ¼ S17 BT.

A juniper, 14 ins. diam., bears N. 85° W., 37 lks. dist., mkd. ¼ S18 BT.

Thence by triangulation; desc. about 40 ft. over N. slope

42.00 Renegade Creek, drains N. 75° W.; asc. about 240 ft. over SW. slope.

57.00 Top of asc. slopes W.; thence along W. slope.

80.00 Point for the cor. of secs. 7, 8, 17 and 18. End triangulation.

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.

T22S R26E

S7|S8

S18|S17

1964

From which

A juniper, 18 ins. diam., bears S. 18° E., 27 lks. dist., mkd. T22S R26E S17 BT.

A pinon, 14 ins. diam., bears N. 10° W., 26 lks. dist., mkd. T22S R26E S7 BT

Survey of the Subdivision T 22 S . . . 2 . . .

CHAINS

Land, broken and mountainous.
Soil, rocky loam.
Timber, dense pinon and juniper.
Undergrowth, scattered sagebrush and oak brush.

From the cor. of secs. 7, 12, 13 and 18, on the W. bdy. of the Tp., monumented with an iron post, 2 ins. diam., set, mkd. and witnessed as described in the official record of the 1933 survey.

N. 89°39' E., bet. secs. 7 and 18.

Over mountainous land through dense pinon and juniper timber and scattered undergrowth. Asc. 280 ft. over W. slope.

39.89 Point for the $\frac{1}{4}$ sec. cor. of secs. 7 and 18.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground and in a collar of stone, with brass cap mkd.

T22S R26E
 $\frac{1}{4}$ $\frac{S7}{S18}$
1964

Set a cedar post, 4 ft. high, 6 ins. diam., alongside iron post.

Asc. 200 ft. over W. slope.

79.78 The cor. of secs. 7, 8, 17 and 18.

Land, mountainous.
Soil, rocky loam.
Timber, dense pinon and juniper.
Undergrowth, scattered sagebrush.

East, bet. secs. 8 and 17.

Over mountainous and broken land through dense pinon and juniper timber and scattered undergrowth. By triangulation; asc. about 400 ft. over NW. slope.

30.25 Rim, bears NE. and SW.; end triangulation.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 8 and 17.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 8 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T22S R26E
 $\frac{1}{4}$ $\frac{S8}{S17}$
1964

Thence by triangulation; asc. about 240 ft. over NW. slope.

58.55 Spur, slopes N.; desc. about 120 ft. over NE. slope.

62.55 Draw, drains N.; asc. about 50 ft. over NW slope.

Survey of the Subdivision, T. 22 S., R. 26 E.

CHAINS

- 67.55 Spur, slopes N.; desc. about 40 ft. over NE. slope.
- 71.55 Draw, drains N.; asc. about 120 ft. over NW. slope.
- 75.75 Spur, slopes NW.; desc. 50 ft. over NE. slope. End triangulation.
- 80.00 Point for the 80 1/16 sec. cor., of secs. 8 and 17.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T22S R26E
 1/16 $\frac{S8}{S17}$ 80
 1964

Raise a mound of stone, 3 ft. base around cor. Cor. is located on steep NE. slope.

Desc. 30 ft. over NE. slope.

- 81.25 Draw, drains NW.; asc. 120 ft. over steep W. slope.
- 85.20 Trail road, bears irregularly SE. and N. 10° W.
- 85.57 Intersect the Utah-Colorado State Boundary.

Point for the closing cor. of secs. 8 and 17.

Set an iron post, 30 ins. long, 2½ ins. diam., 16 ins. in the ground, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T22S C
 R26E O
 U L
 T CC S8 O
 A S17 R
 H A
 D
 O
 1964

From this cor., mile cor. 131, on the Utah-Colorado State Boundary, bears S. 0° 27' W., 14.46 chs. dist., monumented with an iron post, 2½ ins. diam., hereinbefore described.

Land, mountainous and broken.
 Soil, rocky loam.
 Timber, dense pinon and juniper.
 Undergrowth, scattered sagebrush and oak brush.

Point for the E. ½ sec. cor. of sec. 17, on the E. bdy. of the Tp., (Utah-Colorado State Boundary), at mid-point Bet. the closing cor. of secs. 8 and 17, and the closing cor. of secs. 17 and 20.

Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

Survey of the Subdivision, T. 22 S., R. 26 E.

CHAINS

T22S
 R26E | C
 | O
 | L
 S17 | O
 | R
 | A
 | D
 | O
 1964

From this cor., Mile Cor. 131, on the Utah-Colorado State Boundary, bears N. 0°27' E., 25.43 chs. dist., monumented with an iron post, 2½ ins. diam., hereinbefore described.

From the cor. of secs. 7, 8, 17 and 18.

N. 0°01' E., bet. secs. 7 and 8.

Over rolling mountain land through dense pinon and juniper timber and scattered undergrowth. By triangulation; desc. about 120 ft. over NW. slope.

14.00 Draw, drains NW., thence along rolling W. slope.

38.00 End triangulation; continue along W. slope.

40.00 Point for the ¼ sec. cor. of secs. 7 and 8.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground with brass cap mkd.

T22S R26E
 |
 | ¼
 S7 | S8
 1964

From which

A juniper, 8 ins. diam., bears S. 73° E., 14 lks. dist., mkd. ¼ S8 BT.

A juniper, 10 ins. diam., bears N. 40° W., 38 lks. dist., mkd. ¼ S7 BT.

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Continue along rolling W. slope.

68.10 Spur, on N. end of Flat Iron Hill, slopes NW.; thence by triangulation; desc. about 150 ft. over N. slope.

80.00 Point for the cor. of secs. 5, 6, 7 and 8. End triangulation.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

Survey of the Subdivision, T. 22 S., R. 25 E.

CHAINS

T22S R26E

$\frac{S6}{S7} | \frac{S5}{S8}$

1964

From which

A juniper, 10 ins. diam., bears N. 61°30' E., 44 lks. dist., mkd. T22S R26E S5 BT.

A pinon, 14 ins. diam., bears S. 25°E., 24 lks. dist., mkd. T22S R26E S8 BT.

A juniper, 15 ins. diam., bears S. 61°30' W., 29 lks. dist., mkd. T22S R26E S7 BT.

A juniper, 12 ins. diam., bears N. 28°30' W., 37 lks. dist., mkd. T22S R26E S6 BT.

Land, rolling mountain.
Soil, rocky loam.
Timber, dense pinon and juniper.
Undergrowth, scattered sagebrush.

From the cor. of secs. 1, 6, 7 and 12, on the W. bdy. of the Tp., monumented with an iron post, 2 ins. diam., set, mkd. and witnessed as described in the official record of the 1933 survey.

N. 89°39' E., bet. secs. 6 and 7.

Over mountainous land through medium dense pinon and juniper timber and scattered undergrowth. Asc. 30 ft. over SW. slope.

6.45 Spur, slopes SW.; thence by triangulation; desc. about 40 ft. along S. slope.

30.00 Small draw, drains SW.; asc. about 50 ft. over NW. slope. Leave timber.

32.15 Trail road, bears NE. and SW. End triangulation.

39.88 Point for the $\frac{1}{2}$ sec. cor. of secs. 6 and 7.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

T22S R26E

$\frac{1}{2} \frac{S6}{S7}$

1964

Asc. 35 ft. over NW. slope.

46.00 Wash, drains NW., asc. 105 ft. over SW. slope. Enter dense timber, bears NW. and SE.

56.75 Enter draw, drains SW. from E.; asc. 45 ft. along draw.

59.20 Leave draw, drains W. from SE.; asc. 15 ft. over SW. slope.

Survey of the Subdivision, T. 22 S., R. 26 E.

CHAINS	
61.55	Small draw, drains SW.; asc. 130 ft. over SW. slope.
76.50	Spur, slopes N.; desc. 5 ft. along N. slope.
79.76	The cor. of secs. 5, 6, 7 and 8. Land, mountainous. Soil, rocky loam. Timber, dense pinon and juniper. Undergrowth, sagebrush.
	East, bet. secs. 5 and 8. Over mountainous land through dense pinon and juniper timber and scattered undergrowth. Along N. slope by triangulation.
23.20	Draw, drains NW.; asc. about 120 ft. over W. slope.
40.00	Point for the $\frac{1}{2}$ sec. cor. of secs. 5 and 8. End triangulation. Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 5 ft. base to top, with brass cap mkd. T22S R26E $\frac{1}{2} \frac{S5}{S8}$ 1964
	Thence by triangulation.
40.20	Small wash, drains SW.; asc. about 160 ft. over W. slope.
66.20	Spur, slopes N.; desc. 40 ft. over NE. slope.
77.20	Draw, drains NW.; asc. 50 ft. over NW. slope.
80.00	Point for the $80 \frac{1}{16}$ sec. cor. of secs. 5 and 8. Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd. T22S R26E $1/16 \frac{S5}{S8} 80$ 1964
	Raise a mound of stone around cor. Cor. is located on steep, rocky NW. slope, about $1\frac{1}{2}$ chs. NW. of trail road, bearing nearly E. and SW. Asc. 15 ft. over NW. slope.
80.30	Wire fence, bears nearly N. and extends S. about 1 ch. to end.
81.00	Top ascent on N. slope; end triangulation; desc. 85 ft. along N. slope.
86.24	Point for the closing cor. of secs. 5 and 8.

Survey of the Subdivision, T. 22 S., R. 26 E.

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T22S
R26E
UT $\frac{C S5}{C S8}$ COLO
1964

From this cor. mile cor. 132, on the Utah-Colorado State Boundary, bears S. 0°29' W., 14.35 chs. dist., monumented with an iron post, 2½ ins. diam., hereinbefore described.

Land, mountainous.
Soil, rocky loam.
Timber, dense pinon and juniper.
Undergrowth, scattered sagebrush.

Point for the E. ¼ sec. cor. of sec. 8, on the E. bdy. of the Tp. (Utah-Colorado State Boundary), at mid-point bet. the closing cor. of secs. 5 and 8, and the closing cor. of secs. 8 and 17.

Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T22S | C
R26E | Q
 | ½ L
 | S8 O
 | R
 | A
 | D
 | O
1964

From which

A pinon, 8 ins. diam., bears N. 0°45' W., 29 lks. dist., mkd. ¼ S8 BT.

From this cor., mile cor. 132, on the Utah-Colorado State Boundary, bears N. 0°27' E., 25.63 chs. dist., monumented with an iron post, 2½ ins. diam., hereinbefore described.

Point for the E. ¼ sec. cor. of sec. 5, on the E. bdy. of the Tp. (Utah-Colorado State Boundary), at 40.00 chs. northing from the closing cor. of secs. 5 and 8.

Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

Survey of the Subdivision, T. 22 S., R. 26 E.

CHAINS

T22S
R26E
 $\frac{1}{4}$
UT S5 | COLO
1964 |

From which

A juniper, 10 ins. diam., bears West 47 lks. dist.,
mkd. T22S R26E $\frac{1}{4}$ S5 BT.

An old drift fence, bears East, 15 lks. dist.

From this cor., mile cor. 132, on the Utah-Colorado State
Boundary, bears S. $0^{\circ}29'$ W., 54.35 chs. dist., monu-
mented with an iron post, $2\frac{1}{2}$ ins. diam., hereinbefore
described.

From the cor. of secs. 5, 6, 7 and 8.

N. $0^{\circ}15'$ E., bet. secs. 5 and 6.

Over mountainous land through dense pinon and juniper
timber and scattered undergrowth. Desc. 75 ft. over N.
slope.

- 5.35 Trail road, bears NW. and SE.; desc. 75 ft. over NE.
slope.
- 11.05 Draw, drains NW.; asc. 60 ft. over S. slope.
- 18.40 Spur, slopes W.; desc. 50 ft. over N. slope.
- 21.60 Draw, drains W.; asc. 65 ft. over S. slope.
- 26.20 Rocky spur, slopes N. 80° W., desc. 75 ft. over N. slope.
- 31.25 Base of descent; asc. 20 ft. over S. slope.
- 36.16 Top of rocky knoll; desc. 40 ft. over NW. slope.
- 39.20 Trail road, bears E. and W.
- 40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 5 and 6.
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins.
in the ground, and in a collar of stone, with brass cap
mkd.

T22S R26E
 $\frac{1}{4}$
S6 | S5
1964

From which

A juniper, 8 ins. diam., bears S. $39^{\circ}30'$ E., 12
lks. dist., mkd. $\frac{1}{4}$ S5 BT.

A juniper, 8 ins. diam., bears S. $57^{\circ}15'$ W., 24
lks. dist., mkd. $\frac{1}{4}$ S6 BT.

Desc. 15 ft. over NW. slope.

Survey of the Subdivision, T. 22 S., R. 26 E.

CHAINS

- 42.00 Draw, drains SW.; asc. 40 ft. over SW. slope.
- 55.60 Rocky spur, slopes NW.; desc. 105 ft. over NW. slope.
- 78.70 Spur, slopes NW.; desc. 15 ft. over NE. slope.
- 83.00 Small draw, drains NW.; asc. 10 ft. over SW. slope.
- 84.34 The cor. of secs. 5, 6, 31 and 32, on the N. bdy. of the Tp., monumented with an iron post, 3 ins. diam., here-
inbefore described.

Land, mountainous.
Soil, rocky loam.
Timber, dense pinon and juniper.
Undergrowth, sagebrush.

General Description

Township 22 South, Range 26 East is located about 13 miles southeast of Cisco, Utah. Access to the township is by trail roads from Dewey, Utah, about 20 miles southwest of the township, and by improved dirt and oiled highway from Fruita, Colorado. There are several trail roads throughout most of the township. The area is broken and mountainous, covered with a dense growth of pinon and juniper timber, with sagebrush and oak brush undergrowth. The soil is rocky loam and shallow. The township is drained in a westerly direction by numerous draws and washes. The only water noted in the township were small intermittent streams in Ryan Creek and Spring Canyon. The elevation varies from 6,000 ft. to 7,600 ft. above sea level. The area is used mostly for grazing. There are no habitations in the township.

CHAINS

Blank

Page

CERTIFICATE OF SURVEY

I, Craig P. Sylvester

, HEREBY CERTIFY upon honor

in pursuance of special instructions bearing date of the 28th day of May, 1966

I have retraced the E. boundary (Utah-Colorado State Boundary), with re-orientation of mile cors. found, and dependently resurveyed a portion of the N. boundary, and surveyed the subdivisional lines of Township 22 South, Range 26 East

of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

March 30, 1965
(Date)

[Signature]
(Cadastral Surveyor)
Supervisory

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

RECEIVED FOR APPROVAL
AUG 31 1966

BUREAU OF LAND MANAGEMENT,
Washington, D. C.

The foregoing field notes of the retracement of the E. boundary (Utah-Colorado State Boundary), and the dependent resurvey of a portion of the N. boundary, and the survey of the subdivisional lines of Township 22 South, Range 26 East Salt Lake Meridian,

executed by Craig P. Sylvester, Supervisory Cadastral Surveyor having been critically examined and found correct, are hereby approved.

(Date)

[Signature]
(Chief, Division of Engineering)

CERTIFICATE OF TRANSCRIPT

is a true copy of the original field notes.

Blank

Page

Blank

Page

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
ORIGINAL

43

321

FIELD NOTES

OF THE SURVEY

OF

A PORTION OF THE SUBDIVISIONAL LINES

OF

TOWNSHIP 21 SOUTH, RANGE 21 EAST

RECORDED
INDEXED
MAY 11 1965
BUREAU OF LAND MANAGEMENT
SALT LAKE CITY, UTAH

Of the SALT LAKE Meridian,

In the State of UTAH

EXECUTED BY

Gerald W. Hochstrasser, Cadastral Surveyor

Under special instructions dated May 28, 19 64, which provided for the surveys

included under Group Number 474, approved June 3, 1964,

and assignment instructions dated January 6, 19 65.

Survey commenced January 6, 19 65

Survey completed February 18, 19 65

INDEX DIAGRAM

Township 21 South, Range 21 East,

32	32	18	14		6
31 8	31 8	17 4	8	9	1
29	29	17	14		6
30 7	28 8	16 9	10	13 11	5 12
27	26		13	12	5
28 18	25 17	16	15	12 14	4 13
24	23		11	11	4
25 19	23 20	16 21	22	10 23	3 24
21	21	15	9	9	2
22 30	20 29	15 28	27	8 26	1 25
19		14	8	7	
20 31	32	33	34	7 35	36

Portion of the Subdivisions of
Survey of Township 21 South, Range 21 East

CHAINS

The north boundary (The 4th Standard Parallel South) was surveyed by A.D. Ferron in 1884 and resurveyed by Lewis and Blossom in 1898, and Nelson and Terry in 1919, and the record appears in the field notes of the 4th Standard Parallel South between Townships 20 and 21 South, Range 21 East. The east boundary was surveyed by R.C. Yundt in 1936 and its record appears in the field notes of T. 21 S., R. 22 E. The south boundary was surveyed by C.F. Moore in 1933 and its record appears in the field notes of T. 22 S., R. 21 E. The west boundary was surveyed by A.D. Ferron in 1884 and resurveyed by Lewis and Blossom in 1898, and Craig Sylvester in 1961, and its record appears in the field notes of T. 21 S., R. 21 E. A portion of the subdivisional lines were surveyed by Craig Sylvester et. al. in 1961 under Group 424, and the record appears in the field notes of T. 21 S., R. 21 E.

The following field notes are those of the completion survey of the subdivisions of T. 21 S., R. 21 E. The survey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1947, and the Special Instructions dated May 28, 1964.

The direction of the lines of the survey were determined generally by sustained angulation carried forward from an observation on Polaris for meridian, supplemented by numerous altitude observations on the sun for azimuth taken throughout the survey.

The lengths of all lines were determined by chaining where possible; otherwise by traverse or triangulation. The details of such traverses and triangulations have been thoroughly verified and in order to simplify the record the diagrams and reductions are omitted from these field notes.

The geographic position of the Southeast corner of the township is latitude $38^{\circ}55'44''$ N., and longitude $109^{\circ}32'08''$ W., as taken from data accompanying the special instructions and, in accordance with the special instructions, is deemed sufficiently accurate to meet the needs of this survey.

The magnetic declination was read at a number of stations throughout the township and the average of these readings was found to be $15^{\circ}45'$ E.

Survey of a Portion of the Subdivision of
Township 21 South, Range 21 East

Beginning at the cor. of secs. 25, 26, 35 and 36, an iron post, $2\frac{1}{2}$ ins. diam., set, mkd. and witnessed as described in the 1961 surveys of T. 21 S., R. 21 E.

N. $0^{\circ}01'$ W., bet. secs. 25 and 26.

Over gently rolling desert land through scattered undergrowth of shadscale.

17.06

Telephone line, 6 wires, bears N. $87^{\circ}31'$ W., and S. $87^{\circ}31'$ E. about 1.00 ch., thence about S. 65° E.

Survey of a Portion of the Subdivisions of T. 21 S., R. 21 E.

CHAINS	
18.49	U.S. Highway 50-6, bears N. 87°31' W. and S. 87°31' E. about 6.00 chs., thence about S. 65° E.
21.59	Fence, 4 strand, barbed wire, bears N. 87°31' W., and S. 87°31' E. about 8.00 chs., thence about S. 65° E. parallel to the highway.
40.00	Point for the $\frac{1}{2}$ sec. cor. of secs. 25 and 26. Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 20 ins. in the ground and in a collar of stone, 3 ft. base to brass cap mkd. T21S R21E $\frac{1}{2}$ S25 S26 1965
44.10	Small wash, drains N. 80° E.
49.00	Small wash, drains N. 50° E.
59.60	Small wash, drains S. 40° E.
67.90	Small wash, drains S. 40° E.
71.60	Small wash, drains S. 30° E.
76.40	Old railroad bed, bears E. and W.
80.00	Point for the cor. of secs. 23, 24, 25, and 26. Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground with brass cap mkd. T21S R21E S23 S24 S26 S25 1965 Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor. Land, gently rolling and broken. Soil, clay. No timber. Undergrowth, shadscale.
	From the cor. of secs. 19, 24, 25 and 30 on the E. bdy. of the Tpl., an iron post, 2 ins. diam., set, mkd. and witnessed as described in the official record of T. 21 S., R. 22 E. N. 89°59' W., bet. secs. 24 and 25. Over gently rolling desert land through scattered undergrowth of shadscale.
12.50	Wash, 10 ft. deep, 80 lks. wide, drains S. 40° E.
39.99	Point for the $\frac{1}{2}$ sec. cor. of secs. 24 and 25. Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground with brass cap mkd.

Survey of a Portion of the Subdivisions of T. 21 S., R. 21 E.

CHAINS

T21S R21E
 $\frac{1}{4}$ $\frac{S24}{S25}$
 1965

Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.

79.98 The cor. of secs. 23, 24, 25 and 26.

Land, gently rolling and broken.
 Soil, clay.
 No timber.
 Undergrowth, shadscale.

N. 0°01' W., bet. secs. 23 and 24.

Over gently rolling desert land through scattered undergrowth of shadscale.

13.40 Railroad maintenance road, parallel to railroad.

17.57 Denver and Rio Grand Western Railroad, single track, bears N. 86°27' W. and S. 86°27' E.

18.28 Power line, 23 wires, bears N. 86°27' W. and S. 86°27' E.

21.30 Railroad maintenance road, parallel to tracks.

30.00 Enter low, rolling clay hills.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 23 and 24.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground with brass cap mkd.

T21S R21E
 $\frac{1}{4}$
 S23 | S24
 1965

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

41.40 Low ridge, bears E. and W.

52.00 Trail road, bears E. and W.

55.30 Wash, 6 ft. deep, 20 lks. wide, drains N. 45° E. about 25.00 chs., thence E.

64.40 Wash, 3 ft. deep, 150 lks. wide, drains E.

68.50 Wash, 4 ft. deep, 20 lks. wide, drains E.

76.60 Wash, 4 ft. deep, 20 lks. wide, drains S. 45° E. about 10.00 chs., thence E.

80.00 Point for the cor. of secs. 13, 14, 23 and 24.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T21S R21E
 S14 | S13
 S23 | S24
 1965

Raise a mound of stone, 3 ft. base, 2 ft. high W. of cor.

CHAINS

Land, rolling.
Soil, clay.
No timber.
Undergrowth, shadscale.

From the cor. of secs. 13, 18, 19 and 24 on the E. bdy. of the Tp., a 2 ins. iron post, set, mkd. and witnessed as described in the official record of T. 21 S., R. 22 E.

West, bet. secs. 13 and 24.

Over low rolling clay hills through scattered undergrowth of shadscale.

20.60 Low ridge, bears NW. and SE.

39.99 Point for the $\frac{1}{4}$ sec. cor. of secs. 13 and 24.

Set an iron post, 30 ins. long $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T21S R21E
 $\frac{1}{4}$ $\frac{S13}{S24}$
1965

Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.

From this cor., a stock pond bears about N. 30° W., about 10.00 chs. dist., and is surrounded by a barbed wire fence.

44.10 Wash, 3 ft. deep, 20 lks. wide, drains N. 80° E.

57.50 Ditch, 4 ft. deep, 30 lks. wide, drains N. 65° E. from above wash to stock pond.

79.98 The cor. of secs. 13, 14, 23 and 24.

Land, rolling.
Soil, clay.
No timber.
Undergrowth, shadscale.

N. $0^{\circ}01'$ W., bet. secs. 13 and 14.

Over low, rolling clay hills through scattered undergrowth of shadscale.

9.00 Trail road, bears E. and W., irregularly.

13.00 Wash, 4 ft. deep, 25 lks. wide, drains E., irregularly.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 13 and 14.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T21S R21E
 $\frac{1}{4}$ $S14|S13$
1965

Raise a mound of stone, 2 ft. base, 2 ft. high, W. of cor

Survey of a Portion of the Subdivisions of T. 21 S., R. 21 E.

CHAINS 45.20	Wash, 3 ft. deep, 20 lks. wide, drains S. 70° E.
53.10	Wash, 5 ft. deep, 30 lks. wide, drains S. 60° E.
59.50	Wash, 4 ft. deep, 40 lks. wide, drains S. 70° E.
80.00	Point for the cor. of secs. 11, 12, 13 and 14. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, 3 ft. base, with brass cap mkd. <div style="text-align: center;"> T21S R21E S11 S12 S14 S13 1965 </div>
	Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor. Land, rolling. Soil, clay. No timber. Undergrowth, shadscale.
	From the cor. of secs. 7, 12, 13 and 18, on the E. bdy. of the Tp., a 2 ins. iron post, set, mkd. and witnessed as described in the official record of T. 21 S., R. 22 E. S. 89°59' W., bet. secs. 12 and 13. Over low rolling clay hills through scattered undergrowth of shadscale.
17.80	Road, dirt, graded, bears S. 50° E. and N. 50° W.
28.00	Pinto Wash, drains S. irregularly.
40.00	Point for the ¼ sec. cor. of secs. 12 and 13. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd. <div style="text-align: center;"> T21S R21E S12 S13 1965 </div>
	Set a cedar post, 5 ft. long, 24 ins. in the ground alongside the cor.
47.80	Pinto Wash, drains NE irregularly.
52.00	Road, dirt, graded, curves NW. and NE.
54.00	Pinto Wash, 6 ft. deep, 2.00 chs. wide, drains S. 60° E.
80.00	The cor. of secs. 11, 12, 13 and 14. Land, rolling. Soil, clay. No timber. Undergrowth, shadscale.
	N. 0°01' W., bet. secs. 11 and 12. Over low, rolling clay hills through scattered undergrowth of shadscale and bunch grass.

Survey of a Portion of the Subdivisions of T. 21 S., R. 21 E.

CHAINS	
11.00	Pinto Wash, 6 ft., deep, 100 lks. wide, drains E., irregularly.
11.50	Road, dirt, graded, bears N. 80° E. and S. 80° W.
24.30	Wash, 4 ft. deep, 15 lks. wide, drains S. 45° E.
39.10	Low ridge, bears N. 70° W. and S. 70° E.
40.09	Point for the $\frac{1}{4}$ sec. cor. of secs. 11 and 12. Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T21S R21E $\frac{1}{4}$ S11 S12 1965
54.00	Raise a mound of stone, 2 ft. base, 2 ft. high, W. of cor. Wash, 3 ft. deep, 15 lks wide, drains NE.
63.00	Wash, 3 ft. deep, 15 lks. wide, drains S. 30° E. about 10.00 chs., thence E.
80.18	The cor. of secs. 1, 2, 11 and 12, a $2\frac{1}{2}$ ins. iron post, set, mkd. and witnessed, as described in the official record. Land, rolling. Soil, clay. No timber. Undergrowth, shadscale and bunch grass.
	From the cor. of secs. 1, 6, 7 and 12 on the E. bdy. of the Tp., a 2 ins. iron post, set, mkd. and witnessed as described in the official record, T. 21 S., R. 22 E. N. 89°56' W., bet. secs. 1 and 12. Over low rolling clay hills through scattered growth of shadscale.
15.30	Wash, 5 ft. deep, 50 lks. wide, drains S. 20° W.
38.40	Wash, 10 ft. deep, 75 lks. wide, drains S. 20° E.
40.00	Point for the $\frac{1}{4}$ sec. cor. of secs. 1 and 12. Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground with brass cap mkd.
	T21S R21E $\frac{1}{4}$ S1 S12 1965
80.00	Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor. The cor. of secs. 1, 2, 11 and 12. Land, rolling. Soil, clay. Timber, none. Undergrowth, shadscale.
	The point for the N. $\frac{1}{4}$ sec. cor. of sec. 1 is at mid-point bet. the closing cor. of secs. 1 and 2 and the closing cor. of T. 21 S., Rs. 21 and 22 E. on the N. bdy. of the Tp. At the cor. point.

Survey of a Portion of the Subdivisions of T. 21 S., R. 21 E.

CHAINS	
	<p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground with brass cap mkd.</p> <p style="text-align: center;"> T20S <hr style="width: 10%; margin: auto;"/> ¼ S1 T21S R21E 1965 </p> <p>Raise a mound of stone, 3 ft. base, 2 ft. high, S. of cor. From this cor., the Standard ¼ cor. of sec. 36, T. 20 S., R. 21 E., bears West 5.215 chs. dist. and is an iron post, 1 in. diam., set, mkd. and witnessed as described in the official record.</p>
	<p>From the cor. of secs. 2, 3, 34 and 35 on the S. bdy. of the Tp., a 2 ins. iron post, set, mkd. and witnessed as described in the official record, T. 22 S., R. 21 E.</p> <p>N. 0°01' W., bet. secs. 34 and 35.</p> <p>Over nearly level desert land through scattered growth of shadscale.</p>
21.60	<p>Wash, 4 ft. deep, 31 lks. wide, drains S. 60° E. about 15.00 chs., thence E.</p>
40.00	<p>Point for the ¼ sec. cor. of secs. 34 and 35.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground with brass cap mkd.</p> <p style="text-align: center;"> T21S R21E ¼ S34 S35 1965 </p>
72.00	<p>Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor. Small wash, drains S. 45° E.</p>
80.00	<p>Point for the cor. of secs. 26, 27, 34 and 35.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground with brass cap mkd.</p> <p style="text-align: center;"> T21S R21E S27 S26 S34 S35 1965 </p> <p>Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor. Land, nearly level. Soil, clay. No timber. Undergrowth, shadscale.</p>
39.98	<p>From the cor. of secs. 25, 26, 35 and 36.</p> <p>West, bet. secs. 26 and 35.</p> <p>Over nearly level desert land through scattered undergrowth of shadscale.</p> <p>Point for the ¼ sec. cor. of secs. 26 and 35.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground with brass cap mkd.</p> <p style="text-align: center;"> T21S R21E S26 ¼ S35 1965 </p>

Survey of a Portion of the Subdivisions of T. 21 S., R. 21 E.

CHAINS	
	Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.
41.50	Wash, 10 ft. deep, 30 lks. wide, drains S. 45° E.
79.96	The cor. of secs. 26, 27, 34 and 35. Land, nearly level. Soil, clay. No timber. Undergrowth, shadscale.
	S. 89°59' W., ^{bet} / _{secs.} 27 and 34.
	Over nearly level desert land through scattered undergrowth of shadscale.
40.01	Point for the $\frac{1}{4}$ sec. cor. of secs. 27 and 34. Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd. <div style="text-align: center;"> T21S R21E $\frac{1}{4}$ $\frac{S27}{S34}$ 1965 </div>
	Raise a mound of stone, 2 ft. base, 2 ft. high, N. of cor.
80.02	The cor. of secs. 27, 28, 33 and 34, an iron post, 2 $\frac{1}{2}$ ins. diam., set, mkd. and witnessed as described in the official record of the 1961 surveys of T. 21 S., R. 21 E. Land, nearly level. Soil, clay. No timber. Undergrowth, scattered shadscale.
	From the cor. of secs. 26, 27, 34 and 35. N. 0°01' W., bet. secs. 26 and 27.
	Over gently rolling land through scattered undergrowth of shadscale.
6.30	Middle of stock pond, about 3.00 chs. square.
12.30	Wash, drains about S. 70° E.
20.37	Telephone line, 6 wires, bears N. 87°32' W. and S. 87°32' E.
21.91	U. S. Highway 50-6, bears N. 87°32' W. and S. 87°32' E.
25.00	Fence, 4-strand, barbed wire, bears N. 87°32' W. and S. 87°32' E.
40.00	Point for the $\frac{1}{4}$ sec. cor. of secs. 26 and 27. Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd. <div style="text-align: center;"> T21S R21E $\frac{1}{4}$ S27 S26 1965 </div>
	Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.
72.00	Small wash, drains S. 10° E.; a stock pond bears S. 40° E. about 15.00 chs. dist.
80.00	Point for the cor. of secs. 22, 23, 26 and 27.

Survey of a Portion of the Subdivisions of T. 21 S., R. 21 E.

CHAINS	
	<p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T21S R21E $\frac{S22}{S27} \frac{S23}{S26}$ 1965</p> <p>Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.</p> <p>Land, gently rolling. Soil, clay. No timber. Undergrowth, scattered shadscale.</p>
	<p>From the cor. of secs. 23, 24, 25 and 26.</p> <p>West, bet. secs. 23 and 26.</p> <p>Over gently rolling desert land through scattered undergrowth of shadscale.</p>
16.70	Wash, 6 ft. deep, 15 lks. wide, drains S. 40° E.
39.97	Point for the ¼ sec. cor. of secs. 23 and 26.
	<p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T21S R21E $\frac{¼}{S23}$ S26 1965</p> <p>Raise a mound of stone, 3 ft. base, 2 ft. high, N. of Cor</p>
55.90	Old abandoned railroad bed, bears S. 80° E. and N. 80° W.
79.94	The cor. of secs. 22, 23, 26 and 27.
	<p>Land, gently rolling. Soil, clay. No timber. Undergrowth, scattered shadscale.</p>
	<p>S. 89°59' W., bet. secs. 22 and 27.</p> <p>Over nearly level desert land through scattered undergrowth of shadscale.</p>
8.30	Wash, drains SE.
40.00	Point for the ¼ sec. cor. of secs. 22 and 27.
	<p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground with brass cap mkd.</p>

Survey of a Portion of the Subdivisions of T. 21 S., R. 21 E.

CHAINS	T21S R21E ¼ S22 S27 1965
	Raise a mound of stone, 3 ft. base, 2 ft. high, N. of c.
46.20	Wash, 3 ft. deep, 10 lks. wide, drains S. 30° E.
49.80	Dirt road, unimproved, bears N. 20° W. and S. 20° E.
80.00	The cor. of secs. 21, 22, 27 and 28, an iron post, 2½ ins. diam., set, mkd. and witnessed as described in the official record of the 1961 surveys of T. 21 S., R. 21 E.
	Land, nearly level. Soil, clay. No timber. Undergrowth, scattered shadscale.
From the cor. of secs. 22, 23, 26 and 27.	
	N. 0°01' W., bet. secs. 22 and 23.
	Over gently rolling land through scattered undergrowth of shadscale.
18.10	Old, abandoned, railroad bed, bears about S. 80° E. and N. 80° W.
20.00	Railroad maintenance road, parallel to tracks.
22.50	Denver and Rio Grande Western Railroad, single track, bears N. 86°27' W. and S. 86°27' E.
23.21	Power line, 23 wires, bears N. 86°27' W. and S. 86°27' E.
39.00	Point selected for the witness ¼ sec. cor. of secs. 22 and 23.
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
T21S, R21E W, C S22 S23 1965	
	Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.
40.00	True point for the cor. falls in wash 6 ft. deep, 1.00 chs. wide, draining S. 15° W.
59.50	Wash; 5 ft. deep, 1.00 chs. wide, drains S. 15° E. about 10.00 chs., thence S. 15° W.
80.00	Point for the cor. of secs. 14, 15, 22 and 23.
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground with brass cap mkd.

CHAINS

T21S R21E
 $\frac{S15}{S22} | \frac{S14}{S23}$
 1965

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Land, gently rolling.
 Soil, clay.
 No timber.
 Undergrowth, scattered shadscale.

From the cor. of secs. 13, 14, 23 and 24.

West, bet. secs. 14 and 23.

Over low rolling clay hills through scattered undergrowth of shadscale.

23.50 Trail road bears, NE. and SW.

39.98 Point for the $\frac{1}{4}$ sec. cor. of secs. 14 and 23.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

T21S R21E
 $\frac{1}{4} \frac{S14}{S23}$
 1965

79.96 The cor. of secs. 14, 15, 22 and 23.

Land, rolling.
 Soil, clay.
 No timber.
 Undergrowth, scattered shadscale.

N. $89^{\circ}57'$ W., bet. secs. 15 and 22.

Over low rolling clay hills through scattered growth of shadscale.

4.25 Wash, 3 ft. deep, 15 lks. wide, drains S. 20° E.

27.50 Wash, 4 ft. deep, 20 lks. wide, drains S. 20° E.

40.04 Point for the $\frac{1}{4}$ sec. cor. of secs. 15 and 22.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T21S R21E
 $\frac{1}{4} \frac{S15}{S22}$
 1965

Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.

50.50 Low ridge, bears N. and S.

Survey of a Portion of the Subdivisions of T. 21 S., R. 21 E.

CHAINS	
70.90	Wash, 6 ft. deep, 75 lks. wide, drains S. 40° E.
80.08	<p>The cor. of secs. 15, 16, 21 and 22, an iron post, 2½ ins. diam., set, mkd. and witnessed as described in the official record of the 1961 surveys of T. 21 S., R. 21 E.</p> <p>Land, rolling. Soil, clay. No timber. Undergrowth, scattered shadscale.</p>
40.00	<p>From the cor. of secs. 14, 15, 22 and 23.</p> <p>N. 0°01' W., bet. secs. 14 and 15.</p> <p>Over low rolling clay hills through scattered growth of shadscale.</p> <p>Point for the ¼ sec. cor. of secs. 14 and 15.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone, 3 ft. base with brass cap mkd.</p> <p style="text-align: center;">T21S R21E ¼ S15 S14 1965</p>
65.20	Wash, 4 ft. deep, 20 lks. wide, drains N. 20° E.
80.00	<p>Point for the cor. of secs. 10, 11, 14 and 15.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T21S R21E S10 S11 S15 S14 1965</p>
	<p>Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.</p> <p>Land, rolling. Soil, clay. No timber. Undergrowth, scattered shadscale.</p>
26.70	<p>From the cor. of secs. 11, 12, 13 and 14, previously described.</p> <p>N. 89°57' W., bet. secs. 11 and 14.</p> <p>Over rolling land through scattered growth of shadscale.</p> <p>Trail road bears, NW. and SE.</p>
39.95	<p>Point for the ¼ sec. cor. of secs. 11 and 14.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>

Survey of a Portion of the Subdivisions of T. 21 S., R. 21 E.

CHAINS	
	T21S R21E $\frac{1}{2} \frac{S11}{S14}$ 1965
79.90	Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor The cor. of secs. 10, 11, 14 and 15. Land, rolling. Soil, clay. No timber. Undergrowth, scattered shadscale.
40.04	N. 89°55' W., bet. secs. 10 and 15. Over rolling land through scattered undergrowth of shadscale. Point for the $\frac{1}{2}$ sec. cor. of secs. 10 and 15. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone, 3 ft. base with brass cap mkd.
	T21S R21E $\frac{1}{2} \frac{S10}{S15}$ 1965
77.00	Low ridge, bears N. 30° E. and S. 30° W.
80.08	The cor. of secs. 9, 10, 15 and 16, an iron post, 2½ ins. diam., set, mkd. and witnessed as described in the official record of the 1961 surveys of T. 21 S., R. 21 E. Land, rolling. Soil, clay. No timber. Undergrowth, scattered shadscale.
13.90	From the cor. of secs. 10, 11, 14 and 15. N. 0°09' W., bet. secs. 10 and 11. Over low rolling hills through scattered undergrowth of shadscale.
28.90	Pinto Wash, 5 ft. deep, 60 lks. wide, drains E.
40.09	Road, dirt, graded, S. 70° E. and N. 70° W., about 8.00 chs., thence N. Point for the $\frac{1}{2}$ sec. cor. of secs. 10 and 11. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T21S R21E $\frac{1}{2}$ S10 S11 1965

Survey of a Portion of the Subdivisions of T. 21 S., R. 21 E.

CHAINS	Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.
69.50	Wash, 12 ft. deep, 60 lks. wide, drains S. 70° E.
80.18	The cor. of secs. 2, 3, 10 and 11, an iron post, 2½ ins. diam., set, mkd. and witnessed as described in the official record of the 1961 surveys of T. 21 S., R. 21 E. Land, rolling. Soil, clay. No timber. Undergrowth, scattered shadscale.
	S. 89°58' W. bet. secs. 3 and 10. Over low rolling clay hills through scattered undergrowth of shadscale.
2.00	Wash, 15 ft. deep, 75 lks. wide, drains S. 60° E.
39.98	Point, for the ¼ sec. cor. of secs. 3 and 10. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T21S R21E S3 ¼ ——— S10 1965
79.96	Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor. The cor. of secs. 3, 4, 9 and 10, an iron post, 2½ ins. diam., set, mkd. and witnessed as described in the official record of 1961 surveys of T. 21 S., R. 21 E. Land, rolling. Soil, clay. No timber. Undergrowth, scattered shadscale.
	The point for the N. ¼ sec. cor. of sec. 3 is at midpoint bet. the closing cor. of secs. 2 and 3 and the closing cor. of secs. 3 and 4 and on the N. bdy. of the Tp. At the cor. point. Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground and in a mound of stone, 4 ft. base to brass cap mkd. T20S ¼ ——— S3 T21S R21E 1965
	From this cor., the Standard ¼ Cor. of sec. 34 bears West. 5.46 chs. and is a 1 in. iron post, set, mkd. and witnessed as described in the official record.
40.00	From the cor. of secs. 27, 28, 33 and 34. N. 89°57' W., bet. secs. 28 and 33. Over nearly level desert land through scattered undergrowth of shadscale. Point for the ¼ sec. cor. of secs. 28 and 33. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground with brass cap mkd.

Survey of a Portion of the Subdivisions of T. 21 S., R. 21 E.

CHAINS	
	<p style="text-align: center;">T21S R21E $\frac{1}{4}$ $\frac{S28}{S33}$ 1965</p> <p>Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.</p> <p>57.50 Wash, 15 ft. deep, 1.00 ch. wide, drains S. 30° E. from N. 80° W.</p> <p>80.00 The cor. of secs. 28, 29, 32 and 33, an iron post, 2½ ins. diam., set, mkd. and witnessed as described in the official record of the 1961 surveys of T. 21 S., R. 21 E.</p> <p>Land, nearly level. Soil, clay. No timber. Undergrowth, scattered shadscale.</p>
	<p>N. 0°03' W., bet. secs. 28 and 29.</p> <p>Over nearly level desert land through scattered undergrowth of shadscale.</p> <p>2.30 Wash, 15 ft. deep, 75 lks. wide, drains S. 80° E. about 15.00 chs., thence S.</p> <p>27.11 Telephone line, 6 wires, bears N. 87°32' W. and S. 87°32' E.</p> <p>28.61 U.S. Highway 50-6, bears N. 87°32' W. and S. 87°32' E.</p> <p>31.70 Fence, barbed wire, 4 strand, bears N. 87°32' W. and S. 87°32' E.</p> <p>40.00 Point for the ¼ sec. cor. of secs. 28 and 29.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T21S R21E $\frac{1}{4}$ $\frac{S29}{S28}$ 1965</p> <p>Raise a mound of stone, 3 ft. base, 2½ ft. high, W. of cor.</p> <p>80.00 Point for the cor. of secs. 20, 21, 28 and 29.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T21S R21E $\frac{1}{4}$ $\frac{S20}{S29} \frac{S21}{S28}$ 1965</p> <p>Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.</p> <p>Land, nearly level. Soil, clay. No timber. Undergrowth, scattered shadscale.</p>
	<p>From the cor. of secs. 21, 22, 27 and 28.</p> <p>West, bet. secs. 21 and 28.</p> <p>Over nearly level desert land through scattered undergrowth of shadscale.</p> <p>39.96 Point for the ¼ sec. cor. of secs. 21 and 28.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>

Survey of a Portion of the Subdivisions of T. 21 S., R. 21 E.

CHAINS	T. 21 S. R. 21 E. ¼ S21 S28 1965
67.50	Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor. Wash, drains S. 20° E.
79.92	The cor. of secs. 20, 21, 28 and 29. Land, nearly level. Soil, clay. No timber. Undergrowth, scattered shadscale.
23.52	N. 0°05' W., bet. secs. 20 and 21. Over nearly level desert land through scattered undergrowth of shadscale.
24.20	Denver and Rio Grande Western Railroad, single track, bears N. 75° E. and S. 75° W.
39.99	Power line, 23 wires, bears N. 75° E. and S. 75° W.; enter low rolling clay hills. Point for the ¼ sec. cor. of secs. 20 and 21. Set an iron post, 30 ins. long 2½ ins. diam., 24 ins. in the ground with brass cap mkd.
79.98	T21S R21E ¼ S20 S21 1965 Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor. The cor. of secs. 16, 17, 20 and 21, an iron post, 2½ ins. diam., set, mkd. and witnessed as described in the official record of the 1961 surveys of T. 21 S., R. 21 E. Land, nearly level S. 25.00 chs.; rolling N. 55.00 chs. Soil, clay. No timber. Undergrowth, scattered shadscale.
28.20	From the cor. of secs. 8, 9, 16 and 17, an iron post, 2½ ins. diam., set, mkd. and witnessed as described in the official record of the 1961 surveys of T. 21 S., R. 21 E. N. 0°03' W., bet. secs. 8 and 9. Over rolling bench land through scattered undergrowth of shadscale.
40.00	Sagers Wash, 6 ft. deep, 60 lks. wide, drains S. 20° W. Point for the ¼ sec. cor. of secs. 8 and 9. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground with brass cap mkd.
65.00	T21S R21E ¼ S8 S9 1965 Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.
80.00	Sagers Wash, 6 ft. deep, 60 lks wide, drains S. 10° E. about 20.00 chs., thence S. 20° W. Point for the cor. of secs. 4, 5, 8 and 9. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground with brass cap mkd.

Survey of a Portion of the Subdivisions of T. 21 S., R. 21 E.

CHAINS	T21S R21E S5 S4 S8 S9 1965
	Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.
	Land, rolling. Soil, clay and gravel. No timber. Undergrowth, scattered shadscale.
	From the cor. of secs. 3, 4, 9 and 10. S. 89°54' W., bet. secs. 4 and 9. Over broken bench land through scattered undergrowth of Shadscale.
32.70	Dirt road, bears N. 65° W. and S. 65° E.
39.98	Point for the $\frac{1}{2}$ sec. cor. of secs. 4 and 9. Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground with brass cap mkd.
	T21S R21E $\frac{1}{2}$ ——— S4 S9 1965
	Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.
41.90	Fence, barbed wire, bears about S. 70° W., and N. 70° E. about 6.00 chs., thence about N. 45° E.
42.00	Pinto Wash, 4 ft. deep, 30 lks. wide, drains S.
53.10	Trail road, bears N. and S.
56.70	Fence, barbed wire, bears about N. 20° W. and S. 20° E. about 6.00 chs., thence about N. 70° E.
62.50	Dirt road, bears N. 60° W. and S. 60° E.
79.96	The cor. of secs. 4, 5, 8 and 9. Land, broken. Soil, clay and gravel. No timber. Undergrowth, scattered shadscale.
	N. 0°03' W., bet. secs. 4 and 5. Over broken bench land through scattered undergrowth of shadscale; by triangulation.
10.00	Dirt road, bears about E. and W.
25.00	Begin steep ascent over vertical ledges facing S.
40.00	True point for the $\frac{1}{2}$ sec. cor. of secs. 4 and 5 falls on the face of sandstone ledge; it is impossible to perpetuate an iron post at this point.

Survey of a Portion of the Subdivisions of T. 21 S., R. 21 E.

CHAINS

40.30 Top of sandstone ledge, 200 ft. high, faces S.; end of triangulation; enter scattered pinon and juniper.

40.40 Point selected for the witness $\frac{1}{4}$ sec. cor. of secs. 4 and

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., on solid sandstone and in a mound of stone, 5 ft. base, to brass cap mkd.

T21S R21E
 \downarrow
 S5 $\frac{1}{4}$ S4
 \downarrow
 WC
 1965

Thence, over rolling and broken bench through scattered growth of juniper.

78.88 Intersect the N. bdy. of the Tp. (The 4th Standard Parallel South).

Point for the closing cor. of secs. 4 and 5.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground with brass cap mkd.

T20S
 S33

 S5 | S4
 |
 GC
 T21S R21E
 1965

Raise a mound of stone, 3 ft. base, 2 ft. high, S. of cor.

From this point the Standard Cor. of secs. 32 and 33, T. 20 S., R. 21 E., bears West, 5.70 chs. dist. and is an iron post, 2 ins. diam., set, mkd. and witnessed as described in the official record of T. 20 S., R. 21 E.

Land, broken rolling S. half and mountains on N. half mile.

Soil, clay and gravel.

Undergrowth, scattered shadscale.

Timber, none on S. half mile; scattered juniper on N. half mile.

The N. $\frac{1}{4}$ sec. cor. of sec. 4 is set at midpoint bet. the closing cors. of secs. 4 and 5 and the closing cor. of secs. 3 and 4 and on the N. bdy. of the Tp.

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground with brass cap mkd.

T20S
 $\frac{1}{4}$ S4

 T21S R21E
 1965

Raise a mound of stone, 3 ft. base, 2 ft. high, S. of cor.

From this point the Standard $\frac{1}{4}$ sec. cor. of sec. 33, T. 20 S., R. 21 E., bears W., 5.61 chs. dist., and is an iron post, 1 in. diam., set, mkd. and witnessed as described in the official record of the 1919 resurvey of the 4th Standard Parallel South.

Survey of a Portion of the Subdivisions of T. 21 S., R. 21 E.

CHAINS

From the cor. of secs. 29, 30, 31 and 32, an iron post, 2½ ins. diam., set, mkd. and witnessed as described in the 1961 surveys of T. 21 S., R. 21 E.

West, bet. secs. 30 and 31.

Over low rolling clay hills through scattered undergrowth of shadscale.

6.80 Dirt road, bears N. and S.

12.00 Low ridge, bears N. and S.

26.00 Leave hills; enter nearly level land.

28.80 Wash, 5 ft. deep, 30 lks. wide, drains S. 30° E.

40.00 Point for the ¼ sec. cor. of secs. 30 and 31.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

$$\begin{array}{r} \text{T21S R21E} \\ \frac{\text{S30}}{\text{S31}} \\ \frac{1}{4} \\ 1965 \end{array}$$

Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.

75.00 Wash, 6 ft. deep, 40 lks. wide, drains S. 45° E.

80.00 Point for the 1/16 sec. cor. of secs. 30 and 31.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

$$\begin{array}{r} \text{T21S R21E} \\ \frac{\text{S30}}{\text{S31}} \\ 1/16 \ 80 \\ 1965 \end{array}$$

Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.

86.54 Intersect the W. bdy. of the tp.; true point for the closing cor. of secs. 30 and 31 falls in the bottom of a wash, 10 ft. deep, 30 lks. wide, draining S. 45° E.

Therefore, at a point N. 0°11' W., 50 lks. dist. from the true point for the cor., I select a point for the witness closing cor.

At this point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

$$\begin{array}{r} \text{T21S} \\ \text{R20E R21E} \\ \text{S36} \left| \frac{\text{S30}}{\text{S31}} \right. \text{WCC} \\ 1965 \end{array}$$

Raise a mound of stone, 3 ft. base, 2 ft. high, E. of cor.

From the true point for the closing cor.

The E. ¼ sec. cor. of sec. 36, T. 21 S., R. 20 E., bears S. 0°11' E., 10.76 chs. dist., and is a 2½ ins. iron post

Survey of a Portion of the Subdivisions of T. 21 S., R. 21 E.

CHAINS

set, mkd. and witnessed as described in the official record of the field notes of the 1961 resurvey of the W. bdy. of T. 21 S., R. 21 E.

Land, rolling E. 26.00 chs.; nearly level W. 60.00 chs.
Soil, clay.
No timber.
Undergrowth, scattered shadscale.

The point for the W. $\frac{1}{4}$ sec. cor. of sec. 31 is at mid-point bet. the closing cor. of secs. 30 and 31 and the closing Tp. cor. of Tps. 21 and 22 S., R. 21 E.

At this point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T21S
R20E | R21E
 | $\frac{1}{4}$
 | S31
 |
 1965

Raise a mound of stone, 3 ft. base, 2 ft. high, E. of cor.

From this point, the cor. of Tps. 21 and 22 S., R. 20 E. bears S. $0^{\circ}11'$ E., 11.00 chs. dist. and is an iron post, $2\frac{1}{2}$ ins. diam., set, mkd. and witnessed as described in the official record of the field notes of the 1961 resurvey of the W. bdy. of T. 21 S., R. 21 E.

From the cor. of 29, 30, 31 and 32.

N. $0^{\circ}03'$ W., bet. secs. 29 and 30.

Over nearly level desert land through scattered undergrowth of shadscale.

30.50 Telephone line, 6 wire, bears N. $87^{\circ}32'$ W., and S. $87^{\circ}32'$ E.

32.00 U.S. Highway 50²⁶, bears N. $87^{\circ}32'$ W. and S. $87^{\circ}32'$ E.

35.87 Fence, barbed wire, 4 strand, bears N. $87^{\circ}32'$ W. and S. $87^{\circ}32'$ E.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 29 and 30.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T21S R21E
 | $\frac{1}{4}$
 | S30 | S29
 |
 1965

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

45.30 Low ridge, bears E. and W.

74.50 Bootlegger Wash, 7 ft. deep, 75 lks. wide, drains S. 20° E.

80.00 Point for the cor. of secs. 19, 20, 29 and 30.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in

Survey of a Portion of the Subdivisions of T. 21 S., R. 21 E.

CHAINS	
	<p>the ground, with brass cap mkd.</p> <p style="text-align: center;">T21S R21E $\frac{S19}{S30} \frac{S20}{S29}$ 1965</p> <p>Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.</p> <p>Land, nearly level S. half mile; rolling N. half mile. Soil, clay. No timber. Undergrowth, scattered shadscale.</p>
	<p>From the cor. of secs. 20, 21, 28 and 29.</p> <p>S. 89°56' W., bet. secs. 20 and 29.</p> <p>Over gently rolling desert land through scattered undergrowth of shadscale.</p>
31.00	Trail road, bears N. and S.
34.00	Trail road, bears NW. and SE. about 4.00 chs., thence S.
39.97	Point for the cor. of secs. 20 and 29.
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">T21S R21E $\frac{1}{2} \frac{S20}{S29}$ 1965</p>
47.50	Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor. Dirt road bears SE and NW.
50.70	Wash, 10 ft. deep, 70 lks. wide, drains S. 15° E.
79.94	The cor. of secs. 19, 20, 29 and 30.
	Land, nearly level. Soil, clay. No timber. Undergrowth, scattered shadscale.
	West, bet secs. 19 and 30.
	Over nearly level desert land through scattered undergrowth of shadscale.
.90	Wash, 8 ft. deep, 60 lks. wide, drains S. 20° E.
15.00	Bootlegger Wash, 8 ft. deep, 60 lks. wide, drains S. 60° E.
40.00	Point for the ½ sec. cor. of secs. 19 and 30.
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

Survey of a Portion of the Subdivisions of T. 21 S., R. 21 E.

CHAINS

T21S R21E
 $\frac{1}{4}$
 S19
 S30
 1965

- Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.
- 52.46 Fence, barbed wire, 4 strand, bears S. 26° E. and N. 26° W.
- 73.40 Dirt road, bears SE and NW.
- 80.00 Point for the 1/16 sec. cor. of secs. 19 and 30.
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T21S R21E
 1/16 80
 S19
 S30
 1965

- Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.
- 86.26 Intersect the W. bdy. of the Tp.
- Point for the closing cor. of secs. 19 and 30.
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T21S
 R20E R21E
 S19
 S25 | CC
 S30
 1965

- Raise a mound of stone, 3 ft. base, 2 ft. high, E. of cor.
- From this cor., the E. $\frac{1}{4}$ sec. cor. of sec. 25, R. 21 S., R. 20 E., bears S. $0^{\circ}06'$ W., 10.57 chs. dist. and an iron post, $2\frac{1}{2}$ ins. diam., set, mkd. and witnessed as described in the official record of the 1961 resurvey of the E. bdy. of T. 21 S., R. 20 E.
- Land, nearly level.
 Soil, clay.
 No timber.
 Undergrowth, scattered shadscale.

The point for the W. $\frac{1}{4}$ sec. cor. of sec. 30 is at mid-point bet. the closing cor. of secs. 19 and 30 and the closing cor. of secs. 30 and 31 and on the W. bdy. of the Tp.

At the cor. point.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T21S
 R20E | R21E
 $\frac{1}{4}$
 S30
 1965

Raise a mound of stone, 3 ft. base, 2 ft. high, E. of cor.

Survey of a Portion of the Subdivision of T. 21 S., R. 21 E.

CHAINS

From this cor., the cor. of secs. 25 and 36, T. 21 S., R. 20 E., bears S. $0^{\circ}32'$ W., 10.56 chs. dist., and is an iron post, $2\frac{1}{2}$ ins. diam., set, mkd. and witnessed as described in the official record of the 1961 re-survey ~~and witnessed as described in the official record of the 1961 re-survey~~ of the E. bdy. of T. 21 S., R. 20 E.

From the cor. of secs. 19, 20, 29 and 30.

N. $0^{\circ}03'$ W., bet. secs. 19 and 20.

Over nearly level desert land through scattered undergrowth of shadscale.

15.00 Wash, 12 ft. deep, 40 lks. wide, drains S.

28.15 Denver and Rio Grande Western Railroad, single track, bears N. $67^{\circ}07'$ W. and S. $67^{\circ}07'$ E.

29.00 Power line, 23 wires, bears N. $67^{\circ}07'$ W. and S. $67^{\circ}07'$ E.; enter low rolling clay hills.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 19 and 20.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground with brass cap mkd.

T21S R21E

$\frac{1}{4}$
S19 | S20
1965

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

62.80 Wash, 3 ft. deep, 15 lks. wide, drains S. 35° E.

80.00 Point for the cor. of secs. 17, 18, 19 and 20.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground with brass cap mkd.

T21S R21E

S18 | S17
S19 | S20
1965

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Land, nearly level S. 29.00 chs.; rolling N. 51.00 chs.
Soil, clay.

No timber.

Undergrowth, scattered shadscale.

From the cor. of secs. 16, 17, 20 and 21.

S. $89^{\circ}58'$ W., bet. secs. 17 and 20.

Over low rolling clay hills through scattered undergrowth of shadscale.

Survey of a Portion of the Subdivisions of T. 21 S., R. 21 E.

CHAINS	
37.88	<p>Point selected for the witness cor. for the $\frac{1}{4}$ sec. cor. of secs. 17 and 20.</p> <p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground with brass cap mkd.</p> <div style="text-align: center;"> <p>T21S R21E</p> <p>WC$\frac{1}{4}$ ← $\frac{S17}{S20}$</p> <p>1965</p> </div> <p>Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.</p>
38.06	Road, dirt, bears N. 15° E. and S. 15° W.
39.98	True point for the $\frac{1}{4}$ sec. cor. of secs. 17 and 20 falls in a wash, 15 ft. deep, 2.00 chs. wide, drains S. 15° W.
67.00	Wash, 4 ft. deep, 50 lks. wide, drains S. 20° E.
79.96	<p>The cor. of secs. 17, 18, 19 and 20.</p> <p>Land, rolling. Soil, clay. No timber. Undergrowth, scattered shadscale.</p> <hr/> <p>West, bet. secs. 18 and 19.</p> <p>Over low rolling clay hills through scattered undergrowth of shadscale.</p>
40.00	<p>Point for the $\frac{1}{4}$ sec. cor. of secs. 18 and 19.</p> <p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground with brass cap mkd.</p> <div style="text-align: center;"> <p>T21S R21E</p> <p>$\frac{1}{4}$ ← $\frac{S18}{S19}$</p> <p>1965</p> </div> <p>Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.</p>
71.70	Bootlegger Wash, 4 ft. deep, 40 lks. wide, drains S. 30° E.
80.00	<p>Point for the $\frac{1}{16}$ sec. cor. of secs. 18 and 19.</p> <p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground with brass cap mkd.</p> <div style="text-align: center;"> <p>T21S R21E</p> <p>$\frac{1}{16}$ ← $\frac{S18}{S19}$</p> <p>1965</p> </div> <p>Raise a mound of stone, 2 ft. base, 2 ft. high, N. of cor.</p>
86.28	Intersect the W. bdy. of the Tp.

Survey of a Portion of the Subdivisions of T. 21 S., R. 21 E.

CHAINS

Point for the closing cor. of secs. 18 and 19.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground with brass cap mkd.

T21S
R20E | R21E
S24 | S18 CC
 | S19
 1965

Raise a mound of stone, 3 ft. base, 2 ft. high, E. of cor.

From this cor., the E. $\frac{1}{4}$ sec. cor. of sec. 24, T. 21 S., R. 20 E., bears S. $0^{\circ}19'$ E., 10.32 chs. dist., and is monumented with an iron post, $2\frac{1}{2}$ ins. diam., set, mkd. and witnessed as described in the official record of the 1961 resurvey of the E. bdy of T. 21 S., R. 20 E.

Land, rolling clay hills.
Soil, clay.
No timber.
Undergrowth, shadscale.

The point for the W. $\frac{1}{4}$ sec. cor. of sec. 19 is at mid-point between the closing cor. of secs. 18 and 19, and the closing cor. of 19 and 30 and on the W. bdy. of the Tp.

At cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, and in a collar of stone 2 ft. base, to brass cap mkd.

T21S
R20E | R21E
 | $\frac{1}{4}$
 | S19
 1965

From this cor., the cor. of secs. 24 and 25, T. 21 S., R. 20 E., bears S. $0^{\circ}06'$ W., 10.445 chs. dist., and is monumented with an iron post, $2\frac{1}{2}$ ins. diam., set, mkd. and witnessed as described in the official record of the 1961 resurvey of the E. bdy. of T. 21 S., R. 20 E.

From the cor. of secs. 17, 18, 19 and 20.

N. $0^{\circ}03'$ W., bet. secs. 17 and 18.

Over low rolling clay hills through scattered undergrowth of shadscale.

39.00

Point selected for the witness $\frac{1}{4}$ sec. cor. of secs. 17 and 18.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

Survey of a Portion of the Subdivisions of T. 21 S., R. 21 E.

CHAINS

T21S R21E

WC

↑
½

S18 | S17

1965

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

40.00 True point for the ¼ sec. cor. of secs. 17 and 18 falls in a wash, 5 ft. deep, 50 lks. wide, draining S. 10° E., and it is not deemed safe to perpetuate an iron post at this point.

44.00 Stock pond bears E. about 6.00 chs. dist.

49.50 Trail road, bears N. 60° W. and S. 60° E. to stock pond.

80.00 Point for the cor. of secs. 7, 8, 17 and 18.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground with brass cap mkd.

T21S R21E	
S7	S8
S18	S17
1965	

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Land, rolling clay hills.

Soil, rocky clay.

No timber.

Undergrowth, scattered shadscale.

From the cor. of secs. 8, 9, 16 and 17.

S. 89°58' W., bet. secs. 8 and 17.

Over low rolling clay hills through scattered undergrowth of shadscale.

15.20 Sager's Wash, 6 ft. deep, 25 lks. wide, drains S. 30° W.

27.90 Wash, drains S. 10° E. about 10.00 chs., thence S. 30° W.

39.90 Point for the ¼ sec. cor. of secs. 8 and 17.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T21S R21E	
¼	S8
S17	
1965	

Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.

Survey of a Portion of the Subdivisions of T. 21 S., R. 21 E.

CHAINS	
79.80	<p>The cor. of secs. 7, 8, 17 and 18.</p> <p>Land, rolling clay hills. Soil, rocky clay. No timber. Undergrowth, scattered shadscale.</p>
	<p>West, bet. secs. 7 and 18.</p> <p>Over low rolling clay hills through scattered undergrowth of shadscale.</p>
3.70	<p>Trail road, bears N. and S. irregularly.</p>
7.30	<p>Wash, drains S. irregularly.</p>
40.00	<p>Point for the $\frac{1}{4}$ sec. cor. of secs. 7 and 18.</p> <p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T21S R21E $\frac{1}{4}$ $\frac{S7}{S18}$ 1965</p>
	<p>Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.</p>
80.00	<p>Point for the $\frac{1}{16}$ sec. cor. of secs. 7 and 18.</p> <p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins. in the ground and in a mound of stone, 3 ft. base, to brass cap mkd.</p> <p style="text-align: center;">T21S R21E $\frac{1}{16}$ 80 $\frac{S7}{S18}$ 1965</p>
86.17	<p>Intersect the W. bdy. of the Tp.</p> <p>Point for the closing cor. of secs. 7 and 18.</p> <p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T21S R R20E R21E S13 $\frac{S7}{S18}$ CC 1965</p>
	<p>Raise a mound of stone, 3 ft. base, 2 ft. high, E. of cor.</p> <p>From this cor., the E. $\frac{1}{4}$ sec. cor. of secs. 13, T. 21 S., R. 20 E., bears S. $0^{\circ}05'$ W., 10.26 chs. dist., and is monumented with a $2\frac{1}{2}$ in. iron post, set, mkd. and witnessed as described in the official record of the 1961 resurvey of the E. bdy. of T. 21 S., R. 20 E.</p>

Survey of a Portion of the Subdivisions of T. 21 S., R. 21 E.

CHAINS

Land, rolling clay hills.
Soil, rocky clay.
No timber.
Undergrowth, scattered shadscale.

The point for the W. 1/4 sec. cor. of sec. 18 is at mid-point bet. the closing cor. of secs. 7 and 18 and the closing cor. of secs. 18 and 19, and on the W. bdy. of the Tp.

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground and in a collar of stone, 2 ft. base, to brass cap mkd.

T21S
R20E | R21E
1/4
S18

1965

From this cor., the cor. of secs. 13 and 24, T. 21 S., R. 20 E., bears S. 0°29' W., 10.03 chs. dist., and is a 2 1/2 in. iron post, set, mkd. and witnessed as described in the official record of the 1961 resurvey of the E. bdy. of T. 21 S., R. 20 E.

From the cor. of secs. 7, 8, 17 and 18.

N. 0°03' W., bet. secs. 7 and 8.

Over low rolling clay hills, through scattered undergrowth of shadscale.

40.00 Point for the 1/4 sec. cor. of secs. 7 and 8.

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.

T21S R21E

1/4
S7 | S8

1965

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

80.00 Point for the cor. of secs. 5, 6, 7 and 8.

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.

T21S R21E

S6 | S5
S7 | S8

1965

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Survey of a Portion of the Subdivisions of T. 21 S., R. 21 E.

CHAINS	
	<p>Land, low rolling hills. Soil, rocky clay. No timber. Undergrowth, scattered shadscale.</p>
	<p>From the cor. of secs. 4, 5, 8 and 9. West, bet. secs. 5 and 8. Over low rolling clay hills through scattered undergrowth of shadscale.</p>
8.00	Sagers Wash, 8 ft. deep, 60 lks. wide, drains S.
26.80	Wash, 5 ft. deep, 20 lks. wide, drains S.
39.89	Point for the $\frac{1}{4}$ sec. cor. of secs. 5 and 8. Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd. T21S R21E $\frac{1}{4} \frac{S5}{S8}$ 1965
	Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.
79.78	The cor. of secs. 5, 6, 7 and 8, previously described. Land, low rolling hills. Soil, rocky clay. No timber. Undergrowth, scattered shadscale.
	West, bet. secs. 6 and 7. Over broken land along S. edge of Book Cliffs. Asc. abruptly over ledgy E. slope; by triangulation.
19.90	Top of ledge, 300 ft. high, bears N., and S., about 3.00 chs., to end of spur; thence across top of spur.
22.40	Top of ledge, 300 ft. high, bears N., and S. about 3.00 chs., to end of spur; desc. over ledgy W. slope.
40.00	Point for the $\frac{1}{4}$ sec. cor. of secs. 6 and 7. Set an iron post, 30 ins. long, 12 ins. in the ground and in a mound of stone, 4 ft. base, to brass cap mkd. T21S R21E $\frac{1}{4} \frac{S6}{S7}$ 1965
	Desc. about 100 ft. over W. slope.

Survey of a Portion of the Subdivisions of T. 21 S., R. 21 E.

CHAINS

- 44.00 Draw, drains S.; asc. 100 ft. over E. slope.
 48.50 Top of ascent; thence over rolling and broken land.
 80.00 Point for 1/16 sec. cor. secs. 6 and 7.
 Set an iron post, 30 ins. long, 2½ ins. diam., 16 ins. in the ground and in a mound of stone, 4 ft. base, to brass cap mkd.

T21S R21E
 1/1680 $\frac{S6}{S7}$
 1965

- 81.00 Wash, 3 ft. deep, 20 lks. wide, drains S.
 86.16 Intersect the W. bdy. of the Tp.
 Point for the closing cor. of secs. 6 and 7.
 Set an iron post; 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T21S
 R20E | R21E
 S12 | $\frac{S6}{S7}$ CC
 1965

Raise a mound of stone, 3 ft. base, 2 ft. high, E. of cor.

From this cor., the E. ¼ sec. cor. of sec. 12, T. 21 S., R. 20 E., bears S. 0°04' W., 10.08 chs. dist., and is monumented with a 2½ in. iron post, set, mkd. and witnessed as described in the official record of the 1961 resurvey of the E. bdy. of T. 21 S., R. 20 E.

Land, broken and rolling.
 Soil, rocky clay.
 No timber.
 Undergrowth, scattered shadscale.

The point for the W. ¼ sec. cor. of sec. 7 is at mid-point bet. the closing cor. of secs. 6 and 7, and the closing cor. of secs. 7 and 18, and on the W. bdy. of the Tp.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T21S
 R20E | R21E
 | ¼
 | S7
 1965

Raise a mound of stone, 3 ft. base, 2 ft. high, E. of cor.

From this cor., the cor. of secs. 12 and 13, T. 21 S., R. 20 E., bears S. 0°05' W., 10.15 chs. dist., and is monumented with an iron post, 2½ ins. diam., set, mkd.

Survey of a Portion of the Subdivisions of T. 21 S., R. 21 E.

CHAINS

55.00 Ledy ridge, about 150 ft. high, bears W., and E. about 8.00 chs.

76.00 Trail road, bears SE. and W.

79.06 Intersect the N. bdy. of the Tp. (Fourth Standard Parallel South).

Point for the closing cor. of secs. 5 and 6.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground with brass cap mkd.

T20S
 $\frac{S32}{S6|S5}$
 CC

T21S R21E

1965

Raise a mound of stone, 3 ft. base, 2 ft. high, S. of cor.

From this cor., the standard cor. of secs. 31 and 32 bears W., 6.14 chs. dist., and is a 2 in. iron post, set, mkd. and witnessed as described in the official record, T. 20 S., R. 21 E.

Land, mountainous.

Soil, rocky clay.

Timber, scattered juniper and pinon on upper mesas.

Undergrowth, scattered sagebrush and shadscale.

The point for the N. $\frac{1}{2}$ sec. cor. of sec. 5 is at mid-point bet. the closing cor. of secs. 4 and 5, and the closing cor. of 5 and 6, and on the N. bdy. of the Tp.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 12 ins. in the ground and in a mound of stone, 4 ft. base, to brass cap mkd.

T20S
 $\frac{1}{2} S5$
 T21S R21E

1965

From this cor., the standard $\frac{1}{2}$ cor. of sec. 32, T. 20 S., R. 21 E., bears W., 5.92 chs. dist. and is a 1 in. iron post, set, mkd. and witnessed as described in the official record.

The point for the N. $\frac{1}{2}$ sec. cor. of sec. 6 is W., 40.00 chs. dist. from the closing cor. of secs. 5 and 6; this point falls on a vertical ledge and it is not possible to perpetuate an iron post at the true cor. point.

At a point W., 1.00 chs. dist. from the true cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins. in the ground and in a mound of stone, 4 ft. base, to brass cap for witness cor.; brass cap mkd.

Survey of a Portion of the Subdivisions of T. 21 S., R. 21 E.

CHAINS

T20S

→
 $\frac{1}{2}$ WC S6

T21S R21E

1965

This witness cor. is located at the base of a vertical ledge facing W.

From the true point for this cor., the standard $\frac{1}{2}$ cor. of sec. 31 bears W., 6.14 chs. dist. and is a 1 in. iron post, set, mkd. and witnessed as described in the official record.

The point for the 1/16 sec. cor. of sec. 6 is W., 80.00 chs. dist. from the closing cor. of secs. 5 and 6; this point falls in a wash on a steep S. slope and it is deemed unsafe to perpetuate an iron post at this point.

At a point W., 30 lks. dist. from the true cor. point.

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground and in a mound of stone, 4 ft. base, to brass cap for witness cor.; brass cap mkd.

T20S

→ WC
 1/16 80 S6

T21S R21E

1965

From the true point for this cor., the closing cor. of Tp. 21 S., Rs. 20 and 21 E. bears W., 5.94 chs. dist. and is a 3 in. iron post, set, mkd. and witnessed as described in the official record.

General Description

Township 21 South, Range 21 East is located about 3 miles east of Thompson, Utah. The south 5 tiers of sections are located in low, rolling, clay hills cut by a series of deep washes. The N. tier of sections are on the south end of the Book Cliffs and are cut by deep canyons. Drainage is generally to the south. The elevation ranges from about 4,600 ft. to about 6,500 ft. above sea level. U. S. Highway 50&6 enters the township at the SE. cor. of Sec. 25 continuing in an almost westward direction and leaves the township about 2,00 chs. north of the $\frac{1}{4}$ sec. cor. of Sec. 30 on the W. bdy. The Denver and Rio Grande Western Railroad enters the township at the SE. cor. of Sec. 24 continuing in an almost westward direction and leaves the township just south of the 1/4 sec. cor. of Sec. 19 on the W. bdy. The vegetation is principally shadscale with scattered sagebrush. There are small areas of scattered pinon and juniper in the higher elevations. The only water in the area is contained in several small stockponds scattered through the township. Most of the township is accessible by several trail roads. There is no land within the township under cultivation and it appears to be used entirely for grazing purposes.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS

NAMES	CAPACITY
Ferrel D. Reynolds	Transitman
Merlin J. Robinson	Notekeeper
LaVern Griffin	Cornerman
Stephen L. Peterson	Flagman
David E. Lund	Front Chainman

CERTIFICATE OF SURVEY

W. M. [unclear]

HEREBY CERTIFY upon honor that

... of special instructions bearing date of the 18th day of May 1964 ...
... of the subdivisional lines of Township 11 South ...

... Meridian in the State of Utah ... which
... as having been executed by me and under my direction,
... has been made in strict conformity with said special instructions, the Manual
... of the Survey of the Public Lands of the United States, and in specific manner
... of the foregoing field notes.

...
Date

[Signature]
Celestial Surveyor

Date

Celestial Surveyor

CERTIFICATE OF APPROVAL

...
Date

BUREAU OF LAND MANAGEMENT
Washington, D.C.

... of the subdivisional lines of
... Salt Lake Meridian.

... Celestial Surveyor
... are hereby approved.

OC
Date

[Signature]
Chief, Division of Engineering

CERTIFICATE OF TRANSCRIPT

... that the foregoing transcript of the field notes of the above-described surveys is
... is a true copy of the original field notes.

Date

Chief, Division of Engineering

Blank

Page

Blank

Page

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

ORIGINAL

FIELD NOTES

OF THE

DEPENDENT RESURVEY

OF

A PORTION OF THE SOUTH BOUNDARY (SALT LAKE BASE LINE)

TOWNSHIP 1 NORTH, RANGE 6 EAST

AND

A PORTION OF THE SUBDIVISION LINES

OF

TOWNSHIP 1 SOUTH, RANGE 6 EAST

Of the SALT LAKE Meridian,

In the State of UTAH

EXECUTED BY

FRED R. CHAPPELL

SUPERVISORY CADASTRAL SURVEYOR

Under special instructions dated JUNE 19, 19 64, which provided for the surveys
included under Group Number 472, approved JUNE 22, 1964,
and assignment instructions dated MAY 7, 19 65.

Survey commenced MAY 26, 19 65

Survey completed SEPTEMBER 2, 19 65

R578

INDEX DIAGRAM

Township	1 SOUTH		Range		6 EAST			
	1	2	1	2	3	4	5	6
6	0	0	0	12	0	19	0	
					13		18	
7	0	0	10	11	11	17	18	
			11		12		15	
18	17	18	18	28	14	14	18	
					17		13	
19	00	01	00	25	00	11	00	
					14		10	
20	00	00	07	23	00	19	00	
					22		7	
21	00	00	04	21	00	6	00	

Dependent Resurvey of a Portion of Township 1 South, Range 6 East

CHAINS

The north boundary, of T. 1 S., R. 6 E., (Salt Lake Base Line), was surveyed by William Hardin, in 1872, resurveyed by A. Jessen, in 1893 and retraced by Baxter and Blossom in 1899; the west 5 miles of the south boundary was surveyed by Joseph Gorkinski, in 1869, the east 1 mile was surveyed by Baxter and Blossom in 1899 and in 1931, Ralph Gentry resurveyed the east 2 miles; the south 5 miles of the west boundary was surveyed by Joseph Gorkinski, in 1869, and the north 1 mile was surveyed by Baxter and Blossom in 1899; the north 3 miles of the east boundary were surveyed by Adolphe Jessen, in 1893, in 1899 Baxter and Blossom, surveyed the south 3 miles and retraced the north 3 miles of this boundary and the entire boundary is concurrently being resurveyed by Fred R. Chappell, under this same group and its record appears in the resurvey of the west boundary of T. 1 S., R. 7 E. The southwest portion of the subdivisional lines were surveyed by Joseph Gorkinski, in 1869 and the northeast portion was surveyed by Baxter and Blossom, in 1899, completing the survey of the township.

The following field notes are those of the dependent resurvey, or reestablishment of a portion of the north boundary, and a portion of the subdivisional lines of T. 1 S., R. 6 E.

The resurvey was initiated on the official request of the U. S. Forest Service, because of the need for the plain marking of the lines, and the establishment of 1/16 corners where private and U. S. Forest Service Lands, are adjacent to 1/16 corner points on the section lines.

The survey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1947, and the Special Instructions dated June 19, 1964.

Before restoring the corners, the lines of the original survey were retraced; and a diligent search made for any evidence of the original corners, bearing trees, and other calls of the original field note record. When duly identified the corner positions were remonumented.

The rules of proportionate measurement were applied in order to ascertain the position of lost corners, after completing the necessary retracements to connect with the identified corner locations, but not until exhausting every reasonable possibility of finding direct evidence for the control of each particular corner.

The direction of the lines of the survey were determined by the solar transit method, and checked by numerous altitude observations on the sun, taken throughout the progress of the survey.

The length of the lines were determined by chaining, where the lines were accessible; lines inaccessible were run by traverses and triangulation methods. Distances to topography on lines run by traverse and triangulation methods are approximate as scaled from a reliable U. S. G. S. topographic sheet, the details of such triangulations or traverses have been thoroughly checked and verified and in order to simplify the record the diagrams

Dependent Resurvey of a portion of Township 1 South, Range 6 East

CHAINS

and reductions are omitted from these field notes.

The geographic position for the southeast corner of the township is at Latitude $40^{\circ} 41' 02''$ N. and Longitude $111^{\circ} 12' 21''$ W., as scaled from U.S.C. & G.S. quadrangle sheet "Coalville."

The magnetic declination was read at a number of stations throughout the survey and the average of the several readings was found to be N. 16° E.

Dependent resurvey of a portion of the S. bdy. of T. 1 N. R. 6 E., Salt Lake Meridian (Salt Lake Base Line).

Reestablishment of the surveys executed by William Hardin and Adolphe Jessen, in 1872, and 1893 respectively and retraced by Baxter and Blossom in 1899.

The standard $1/4$ sec. cor. of sec. 34, T. 1 N., R. 6 E., monumented with a sandstone, $20 \times 12 \times 8$ inches, firmly set in the ground, and mkd. $1/4$ on the N. face, and witnessed by a small mound of stone N. of the cor.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 18 ins. in the ground, to solid rock, and in a mound of stone, $3\frac{1}{2}$ ft. base, to top, with brass cap mkd.

SC
T1N R6E
 $\frac{1}{4}$ S34
1965

Rebuild the mound of stone, N. 3 ft. base, 2 ft. high.

Deposit the original cor. in the mound alongside the iron post.

N. $88^{\circ} 53'$ E., along the S. bdy. of sec. 34.

Over mountainous land, through dense undergrowth; desc. 115 ft. over an E. slope.

3.70 Stream, 3 lks. wide, 2 ins. deep, flows SW.; asc. 200 ft. over a W. slope.

22.00 Spur, projects S.

22.67 Point for the closing cor. of secs. 2 and 3, T. 1 S., R. 6 E., hereinafter described.

Desc. 50 ft. over an E. slope, through dense undergrowth.

Dependent Resurvey of a portion of the S. bdy. of T. 1 N., R. 6 E.

CHAINS

- 24.50 Draw, drains S.; asc. 170 ft. over a W. slope.
- 36.70 Spur, projects S.; desc. 56 ft. over a SE. slope.
- 39.48 The standard cor. of secs. 34 and 35, monumented with a sandstone 12x10x2 ins. firmly set in the ground, and mkd. SC on the N. face and with 2 notches on the E. and 4 notches on the W. edges.

At the cor. point.

Set an iron post, 30 ins. long, 2½ ins. in diam., 10 ins. in the ground, to solid rock, and in a mound of stone, 3½ ft. base, to top, with brass cap mkd.

SC
T1N R6E
S34 | S35

1965

Deposit the original cor. in the mound, alongside the iron post.

Land, mountainous.

Soil, rocky, clay loam.

Timber, scattered patches of aspen.

Undergrowth, medium dense oak, service berry and sagebrush.

N. 89° 37' E., along the S. bdy. of sec. 35.

Over mountainous land, through dense undergrowth; desc. 45 ft. over a SE. slope.

- 3.50 Ravine, drains S.; asc. 104 ft. over a W. slope.
- 11.00 Spur, projects S.; desc. 113 ft. over a SE. slope; leave dense undergrowth, enter aspen timber.
- 24.90 Stream, 4 lks. wide, 6 ins. deep, flows S.; asc. 150 ft. over a SW. slope.
- 33.30 Slope changes to W.; asc. 150 ft.
- 38.80 Rocky spur, projects N. 80° W.; asc. 15 ft. along a N. slope; leave timber.
- 40.02 The standard 1/4 sec. cor. of sec. 35, monumented with a sandstone 14x6x4 ins. firmly set in the ground, and mkd. 1/4 and SC on the N. face.

At the cor. point.

Set an iron post, 30 ins. long, 2½ ins. in diam., 22 ins. in the ground, with brass cap mkd.

SC
T1N R6E

½ S35

1965

Raise a mound of stone, 3 ft. base, 2½ ft. high, N. of the cor.

Bury the original cor. alongside the iron post.

Dependent Resurvey of a portion of the S. bdy. of T. 1 N., R. 6 E.

CHAINS

- N. 89° 05' E., beginning new measurement.
- Over mountainous land; asc. 45 ft. over a N. changing to W. slope through scattered undergrowth.
- 3.80 Ridge, bears N. and S.; desc. 100 ft. over an E. slope.
- 9.00 Enter dense aspen timber.
- 16.30 Ravine, drains S. 45° E.; leave timber; asc. 15 ft. along a S. slope.
- 22.67 The closing cor. of secs. 1 and 2, T. 1 S., R. 6 E.; hereinafter described.
- Asc. 10 ft. along a SW. slope.
- 23.20 Spur, projects S.; desc. 80 ft. over an E. slope.
- 27.60 Ravine, drains S.; asc. 10 ft. along a S. slope.
- 33.50 Spur, projects S. 45° E.; desc. 40 ft. over an E. slope.
- 39.55 The standard cor. of secs. 35 and 36, monumented with a sandstone 20x11x4 ins. firmly set in the ground, and mkd. SC on the N. face 5 notches on the W. and 1 notch on the E. faces.
- At the cor. point.
- Set an iron post, 30 ins. long, 2½ ins. in diam., 18 ins. in the ground, to solid rock, and in a mound of stone, 3½ ft. base, to top, with brass cap mkd.
- SC.
T1N R6E
S35|S36
1965
- Bury the original cor. alongside the iron post.
- Land, mountainous.
Soil, rocky clay loam.
Timber, scattered patches of aspen and pine.
Undergrowth, medium dense oak, service berry and sagebrush.
-
- N. 89° 10' E., along the S. bdy. of Sec. 36.
- Over mountainous land, through dense undergrowth and scattered timber.
- .30 Jeep road, bears S. 30° E., and N. 30° W.; desc. 160 ft. over an E. slope.
- 9.70 Bottom of swale, stream, 6 lks. wide, 2 ins. deep, flows S. 3.00 chs. into stock pond.; asc. 63 ft. over a SW. slope.

Dependent Resurvey of a portion of the S. bdy. of T. 1 N., R. 6 E.

CHAINS

- 15.00 Spur, projects S. 30° E., desc. 137 ft. over an E. slope.
- 22.80 Recross jeep road, bears irregularly SW. and NE.; desc. 66 ft. over an E. slope.
- 31.25 Bottom of ravine, stream, 3 lks. wide, 3 ins. deep, flows S.; asc. 92 ft. over a SW. slope.
- 40.09 The standard 1/4 sec. cor. of sec. 36, monumented with a sandstone, 10x7x7 ins. firmly set in the ground, and mkd. SC and 1/4 on the N. face.
- At the cor. point
- Set an iron post, 30 ins. long, 2½ ins. in diam., 20 ins. in the ground, with brass cap mkd.
- SC
T1N R6E
¼ S36
1965
- Raise a mound of stone, 3 ft. base, 2½ ft. high, N. of the cor.
- Bury the original cor. alongside the iron post.
-
- S. 89° 23' E., beginning new measurement.
- Over mountainous land, through dense undergrowth; asc. 10 ft. over a SW. slope.
- 2.70 Spur, projects S.; enter dense aspen timber; desc. 118 ft. over an E. slope.
- 10.70 Ravine, drains S.; asc. 30 ft. over a SW. slope; leave timber.
- 14.60 Saddle in spur, projecting S. 45° E.; desc. 94 ft. over an E. slope; enter aspen timber.
- 21.91 Point for the closing cor. of secs. 1 and 6, T. 1 S., Rs. 6 and 7 E.; hereinafter described.
- Desc. 216 ft. over a rolling E. slope.
- 32.31 Timber, becomes scattered; beginning of a net wire fence; bears irregularly E.; desc. 133 ft. over an E. slope.
- 40.20 The standard cor. of secs. 31 and 36, T. 1 N., Rs. 6 and 7 E., monumented with an iron post, 2½ ins. in diam., as described in the field notes of T. 1 S., R. 7 E., S. L. Mer., resurveyed concurrently under this same group.
- Land, mountainous.
Soil, rocky, clay loam.
Timber, patches of dense aspen, scattered pine and fir.
Undergrowth, areas of dense oak, sagebrush, scattered service berry.

Dependent Reserves of a portion of the Subdivision of T. 1 S., R. 6 E.

Reestablishment of the Survey executed by Foster and Blossom in 1899.

From the cor. of secs. 15 and 16, on the S. 84v. of the Township, monumented with an iron post, 2 ins. in diam., according to the record.

W. 1/2 Sec. 15, Secs. 15 and 16.

Open prairie land, through medium dense aspen timber; sec. 120 ft. over a SW. slope.

W. 1/2 Sec. 15, corner pine and fir, sec. 100 ft. over a SW. slope.

W. 1/2 Sec. 15, corner aspen, sec. 100 ft. over a SW. slope.

The corner of secs. 15 and 16, monumented with a sandstone, 14x14 ins. firmly set in the ground, and nail on the W. face.

No trace of the original bearing trees was found.

At the corner:

Iron post, 2 ins. diam., 24 ins. in diam., 12 ins. in height, with brass cap and.

T15 R6E

1

S15 S16

1899

From the

At corner of sec. 15 in diam., bears S. 14° 45' E., 1.10 sec. dist., nail T15 R6E S15 BT.

At corner of sec. 15 in diam., bears S. 60° W., 45 sec. dist., nail T15 R6E S15 BT.

As a mound of stone, 6 ft. base, 4 ft. high, W. of the post.

At the original cor. alongside the iron post.

At corner of sec. 15, beginning new measurement.

Open prairie land, through dense aspen and scattered timber, sec. 115 ft. over a SW. slope.

W. 1/2 Sec. 15, corner pine and fir, sec. 100 ft. over a SW. slope.

Dependent Resurvey of a portion of the subdivision of T. 1 S., R. 6 E.

CHAINS

- 18.30 Leave rock slide, enter timber; asc. 662 ft. over a SW. slope.
- 40.30 The cor. of secs. 35 and 36, monumented with a sandstone, 18x8x6 ins. firmly set in the ground, and mkd. with 1 notch on the S. and E. edges.
- No trace of the original bearing trees was found.
- At the cor. point
- Set an iron post, 30 ins. long, 2½ ins. in diam., 15 ins. in the ground, to solid rock, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.
- T18 R6E
 S25
 S35|S36
 1965
- from which
- An aspen 5 ins. in diam., bears S. 46° 15' E., 24 lks. dist., mkd. T18 R6E ¼S36 BT.
- An aspen 7 ins. in diam., bears S. 33° 45' W., 6 lks. dist., mkd. T18 R6E ¼S35 BT.
- Deposit the original cor. in the mound, alongside the iron post.
- Land, mountainous.
 Soil, rocky clay, with a considerable amount of broken and exposed sandstone.
 Timber, dense aspen, pine and fir.
 Undergrowth, scattered service berry, choke cherry and oak.
- From the cor. of secs. 25, 30, 31 and 36, on the E. bdy. of the T.
- N. 89° 35' W., bet. secs. 25 and 36.
- Over mountainous land, through medium dense pine timber; desc. 33 ft. along a N. slope.
- 7.90 Bottom of Swifts Canyon, drains irregularly N.; asc. 400 ft. over a broken NE. slope.
- 19.62 Point for the E. 1/16 cor. of secs. 25 and 36, at mid-point bet. the cor. of secs. 25, 30, 31 and 36, and the 1/4 sec. cor. of secs. 25 and 36.
- Set an iron post, 30 ins. long, 2½ ins. in diam., 15 ins. in the ground, to solid rock, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.

E 1 S25
 16 S36
 1965

Dependent Resurvey of a portion of the subdivision of T. 1 S., R. 6

CHAINS

from which.

A pine, 5 ins. in diam., bears N. 45° 15' E., 53 lks dist., mkd. E1/16 S25 BT.

A pine, 14 ins. in diam., bears S. 60° 45' W., 29 lks. dist., mkd. E1/16 S36 BT.

Asc. 143 ft. over an E. slope.

36.00 Spur ridge, projects SW.; desc. 43 ft. over a W. slope.

39.24 The 1/4 sec. cor. of secs. 25 and 36, monumented with a sandstone, 18x15x10 ins. firmly set in the ground, and mkd. 1/4 on the N. face, and witnessed by a small mound of stone, N. of the cor.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 22 ins. in the ground, with brass cap mkd.

T1S R6E

½ S25
S36

1965

Raise a mound of stone, 4 ft. base 3 ft. high, N. of the cor.

Bury the original cor. alongside the iron post.

S. 89° 51' W., beginning new measurement.

Over mountainous land, through scattered pine and dense aspen timber; desc. 263 ft. over a SW. slope.

11.97 The cor. of secs. 35 and 36, hereinbefore described.

N. 89° 43' W., beginning new measurement bet. secs. 25 and 35.

Over mountainous land, through dense aspen and scattered pine timber; desc. 871 ft. over a SW. slope.

28.30 The cor. of secs. 25 and 26, monumented with a quartzite 16x8x6 ins., firmly set in the ground, and mkd., with 1 notch on the E. and 5 notches on the W. edges.

From which an original bearing tree.

An aspen 9 ins. in diam., bears N. 35° E., 28 lks. dist., mkd. T1S R6E S25 BT.

At the cor. point.

Dependent Resurvey of a portion of the subdivision of T. 1 S., R. 6 E.

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.

T1S R6E

$\frac{S26}{S35}$ | $\frac{S25}{S35}$

1965

from which

A aspen, 7 ins. in diam., bears N. $33^{\circ}15'$ E., 21 lks. dist., mkd. T1S R6E S25 BT.

A pine, 9 ins. in diam., bears N. $89^{\circ}30'$ W., 33 lks. dist., mkd. T1S R6E S26 BT.

Raise a mound of stone, 3 ft. base, 2 ft. high, N. of the cor.

Bury the original cor. alongside the iron post.

Land, mountainous.

Soil, rocky clay, with a considerable amount of exposed sandstone.

Timber, dense aspen, dense to scattered pine and fir.

Undergrowth, scattered service berry and choke cherry.

N. $0^{\circ}03'$ W., bet. secs. 25 and 26.

Over mountainous land, through dense pine and aspen timber; asc. 365 ft. over a SW. slope.

38.90 Spur ridge, projects SW.; desc. 16 ft. over a NE. slope.

40.00 The $\frac{1}{2}$ sec. cor. of secs. 25 and 26, monumented with a sandstone, 14x8x6 ins., firmly set in the ground, and mkd. $\frac{1}{2}$ on the W. face.

No trace of the original bearing trees was found.

At the cor. point.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.

T1S R6E

$\frac{1}{2}$
 $\frac{S26}{S25}$

1965

from which

A aspen 8 ins. in diam., bears N. 49° E., 8 lks. dist., mkd. T1S R6E $\frac{1}{2}$ S25 BT.

A aspen 8 ins. in diam., bears W., 11 lks. dist., mkd. T1S R6E $\frac{1}{2}$ S26 BT.

Dependent Resurvey of a portion of the subdivision of T. 1 N. R.
CHAINS

Bury the original cor. alongside the iron post.

N. 0°03' E., beginning new measurement.

Over mountainous land, through dense aspen and scattered pine timber; desc. 510 ft. over a NE. slope.

25.50 Slope changes to N.; desc. 178 ft.

37.50 Draw, drains NW.; thence along a W. slope.

38.20 Jeep road, bears irregularly SE. and NW.; thence along a W. slope.

40.01 The cor. of secs. 23, 24, 25 and 26, monumented with a sandstone, 14x10x8 ins. firmly set in the ground, and mkd. with 1 notch on the E. and 2 notches on the S. edges.

from which the original bearing trees

A aspen 6 ins. in diam., bears N. 35°45' E., (record N. 40° E.), 18 lks. dist., mkd. T1S R6E S24 BT.

SE tree dead and fallen.

A aspen 7 ins. in diam., bears S. 69°15' W., (record S. 26° W.), 21 lks. dist. mkd. T1S R6E S26 BT.

A aspen 7 ins. in diam., bears N. 49°15' W., 47 lks. dist., (record N. 47° W., 40 lks. dist.), mkd. T1S R6E S23 BT.

At the cor. point.

Set an iron post, 30 ins. long, 2½ ins. in diam., 16 ins. in the ground, to solid rock, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.

T1S R6E

S23	S24
S26	S25

1965

from which

A aspen, 6 ins. in diam., bears S. 62°45' E., 28 lks. dist., mkd. T1S R6E S25 BT.

Bury the original cor. alongside the iron post.

Land, mountainous.

Soil, rocky, mountain loam.

Timber, dense aspen, fir and pine.

Undergrowth, scattered service berry and choke cherry.

From the cor. of secs. 19, 24, 25 and 30, on the E. bdy. of the T.

N. 89°59' W., bet. secs. 24 and 25.

Over mountainous land, through dense aspen and

Dependent Resurvey of a portion of the subdivision of T. 1 S., R. 6 E.

CHAINS

- scattered pine timber; desc. 540 ft. over a W. slope.
- 16.60 Bottom of Swifts Canyon; stream, 5 lks. wide, 4 ins. deep, flows irregularly N.
- 18.40 Jeep road, bears N. and S., along canyon bottom; asc. 54 ft. over a E. slope.
- 20.40 Small spur, projects N.; desc. 40 ft. over a W. slope.
- 23.30 Ravine, drains N.; asc. 638 ft. over a E. slope.
- 39.89 The $\frac{1}{2}$ sec. cor. of secs. 24 and 25, monumented with a sandstone, 14x12x6 ins. firmly set in the ground, and mkd. $\frac{1}{2}$ on the N. face.
- The original bearing trees are dead and fallen.
- At the cor. point.
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins. in the ground, with brass cap mkd.
- T1S R6E
- $\frac{1}{2} \frac{S24}{S25}$
- 1965
- from which
- A pine, 6 ins. in diam., bears N. 60° E., 51 lks. dist., mkd. T1S R6E $\frac{1}{2}$ S24 BT.
- A pine, 5 ins. in diam., bears S. $82^\circ 45'$ W., 17 lks. dist., mkd. T1S R6E $\frac{1}{2}$ S25 BT.
- Raise a mound of stone, 4 ft. base, $3\frac{1}{2}$ ft. high, N. of the cor.
- Bury the original cor. alongside the iron post.
-
- N. $89^\circ 40'$ W., beginning new measurement.
- Over mountainous land, through dense aspen and scattered pine timber; asc. 75 ft. over a E. slope.
- 1.80 Spur, projects N. desc. 935 ft. over a timber covered W. slope.
- 39.38 The cor. of secs. 23, 24, 25 and 26.
- Land, mountainous.
Soil, rocky, clay.
Timber, dense aspen, scattered pine and fir.
Undergrowth, scattered patches of service berry, oak and choke cherry.
-
- N. $0^\circ 05'$ W. bet. secs. 23 and 24.

Dependent Resurvey of a portion of the

CHAINS

- Over mountainous land, through dense aspen timber; asc. 134 ft. over SW. slope.
- 13.00 Leave timber, enter dense mahogany; asc. 143 ft. over a SW. slope.
- 19.00 Spur, projects W.; desc. 13 ft. over a NW. slope.
- 23.50 Swale, drains W.; leave undergrowth, enter dense aspen; asc. 48 ft. over a SW. slope.
- 29.30 Spur, projects NW.; desc. 341 ft. over a N. slope, through dense aspen and pine timber.
- 39.90 The $\frac{1}{2}$ sec. cor. of secs. 23 and 24, monumented with a limestone, 17x10x5 ins. firmly set in the ground, and mkd. $\frac{1}{2}$ on the W. face.
- from which a original bearing tree.
- A pine, 14 ins. in diam., bears W. 16 lks. dist., mkd. $\frac{1}{2}$ S23 BT (record calls for a aspen S. 86° W., 16 lks).
- The SE. tree dead and fallen.
- At the cor. point.
- Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. in diam., 24 ins. in the ground, with brass cap mkd.
- T1S R6E
 $\frac{1}{2}$
S23|S24
1965
- from which
- A pine, 8 ins. in diam., bears S. 80° E., 25 lks. dist., mkd. T1S R6E $\frac{1}{2}$ S24 BT.
- Bury the original cor. alongside the iron post.
-
- N. 0°12' W., beginning new measurement.
- Over mountainous land, through dense aspen and pine timber; desc. 500 ft. over a N. slope.
- 31.90 Draw, drains W.; asc. 150 ft. over a S. slope; leave timber; enter medium dense undergrowth.
- 39.86 The cor. of secs. 13, 14, 23 and 24, monumented with a quartzite 20x10x2 ins. firmly set in the ground, and mkd. with 1 notch on the E. and 3 notches on the S. edges, and witnessed by a mound of stone W. of the cor.
- At the cor. point.

Dependent Resurvey of a portion of the subdivision of T. 1 S., R. 6 E.

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 16 ins. in the ground, to solid rock, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.

T1S R6E

$\frac{S14}{S23}$ | $\frac{S13}{S24}$

1965

Rebuild the mound of stone W.

Bury the original cor. alongside the iron post.

Land, mountainous.

Soil, rocky, clay, with broken sandstone.

Timber, areas of dense aspen, pine and scattered fir.

Undergrowth, patches of dense mahogany, scattered sagebrush and service berry.

From the cor. of secs. 13, 18, 19 and 24, on the E. bdy. of the T.

N. $89^{\circ}35'$ W., bet. secs. 13 and 24.

Over mountainous land, through dense aspen and scattered pine timber; desc. 46 ft. over a NW. slope.

2.50 Gully, drains NW.; asc. 56 ft. over a E. slope.

8.40 Spur, projects N.; desc. 177 ft. over a W. slope.

13.30 Jeep road, bears N. and S.; desc. 128 ft. over a N. slope

18.40 Bottom of Swifts Canyon; stream 5 lks. wide, 4 ins. deep, flows N.; asc. 138 ft. over a E. slope.

23.60 Head of gully, drains N. 30° E.; asc. 388 ft. over a NE. slope.

39.84 The $\frac{1}{4}$ sec. cor. of secs. 13 and 24, monumented with a sandstone, 12x9x8 ins. firmly set in the ground, and mkd. $\frac{1}{4}$ on the N. face.

from which the original bearing tree.

A dead pine, 9 ins. in diam., bears N. 10° E., 10 lks. dist., mkd. $\frac{1}{4}$ S13 BT.

At the cor. point.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

T1S R6E

$\frac{1}{4}$ $\frac{S13}{S24}$

1965

Dependent Resurvey of a portion of the subdivision of T. 1 S. R.

CHAINS

Raise a mound of stone, 4 ft. base, 3 ft. high, N. of the cor.

Bury the original cor. alongside the iron post.

N. 89°45' W., beginning new measurement.

Over mountainous land, through dense pine timber; asc. 28 ft. over a NE. slope.

- 4.60 Ridge, bears N. 30° W., and S.; leave timber, enter dense undergrowth; desc. 150 ft. over a SW. slope.
- 18.20 Spur, projects S.; desc. 474 ft. over a SW. slope.
- 33.70 Draw, drains S. 15° W.; asc. 107 ft. along a S. slope.
- 39.83 The cor. of secs. 13, 14, 23 and 24.

Land, mountainous.

Soil, rocky, clay loam.

Timber, dense pine, aspen, scattered fir.

Undergrowth, areas of dense mahogany, scattered service berry and sagebrush.

N. 0°05' E., bet. secs. 13 and 14.

Over mountainous land, through dense undergrowth; asc. 740 ft. over a S. slope.

- 24.40 Spur, projects W.; desc. 375 ft. over a broken NW. slope, through dense pine timber.
- 38.30 Timber becomes scattered, enter dense undergrowth; desc. 70 ft. over NW. slope.
- 40.48 The $\frac{1}{2}$ sec. cor. of secs. 13 and 14, monumented with a sandstone, 12x8x6 ins. firmly set in the ground, and mkd. $\frac{1}{2}$ on the W. face, witnessed by a mound of stone W. of the cor.

At the cor. point.

Set an iron post, 30 ins. long, 2½ ins. in diam., 15 ins. in the ground, to solid rock, ad in a mound of stone, 3 ft. base, to top, with brass cap mkd.

T1S R6E

$\frac{1}{2}$
S14 | S13

1965

from which

A pine, 4 ins. in diam., bears N. 68°15' E., 46 lks. dist., mkd. T1S R6E $\frac{1}{2}$ S13 BT.

Dependent Resurvey of a portion of the subdivision of T. 1 S., R. 6 E.

CHAINS

A pine, 4 ins. in diam., bears N. 40° W., 29 lks. dist., mkd. T1S R6E ½ S14 BT.

Bury the original cor. alongside the iron post.

N. 0°06' W., beginning new measurement.

Over mountainous land, through scattered timber and medium dense undergrowth; desc. 170 ft. over a NW. slope.

5.62 Fall 1.37 chs. W. of a sandstone, 18x8x6 ins. above ground, mkd. ½ on the W. face. There is no official record of this cor.

from which

A pine, 30 ins. in diam., bears N. 73°30' W., 1.05 chs. dist., mkd. 14 SBT.

Thence by triangulation; desc. 930 ft. over a NW. slope.

20.00 Draw, drains NW.; asc. 224 ft. over a SW. slope, through dense undergrowth.

29.40 Spur, projects N. 80° W.; end of triangulation; desc. 220 ft. over a N. slope.

39.00 The cor. of secs. 11, 12, 13 and 14, monumented with a sandstone, 14x10x3 ins. firmly set in the ground, and mkd., with 1 notch on the E. and 4 notches on the S. edges, and witnessed by a small mound of stone W.

At the cor. point.

Set an iron post, 30 ins. long, 2½ ins. in diam., 8 ins. in the ground, to solid rock, and in a mound of stone, 3½ ft. base, to top, with brass cap mkd.

T1S R6E

S11	S12
S14	S13

1965

Rebuild the mound of stone, W. 3 ft. base, 2½ ft. high.

Deposit the original cor. in the mound, alongside the iron post.

Land, mountainous.

Soil, rocky clay.

Timber, patches of dense pine, scattered aspen and fir.

Undergrowth, areas of dense mahogany, medium dense oak and choke cherry.

S. 89°45' E., bet. secs. 12 and 13.

Dependent Resurvey of a portion of the subdivision of T. 1 S., R. 6

CHAINS

- Over mountainous land, through scattered timber and dense undergrowth; asc. 113 ft. along a N. slope.
- 8.30 Spur, projects NE.; desc. 193 ft. over a E. slope.
- 19.80 Jeep road, bears N. 30° W., and S. 30° E.
- 20.40 Bottom of Swifts Canyon, stream, 6 lks. wide, 9 ins. deep flows N. 30° W.; asc. 595 ft. over a SW. slope.
- 39.96 The $\frac{1}{2}$ sec. cor. of secs. 12 and 13, monumented with a sandstone, 20x12x6 ins. firmly set in the ground, and mkd. $\frac{1}{2}$ on the N. face.
- At the cor. point.
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 18 ins. in the ground, to solid rock, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.
- T1S R6E
- $\frac{1}{2}$ $\frac{S12}{S13}$
- 1965
- Deposit the original cor. in the mound, alongside the iron post.
-
- S. 89°36' E., beginning new measurement.
- Over mountainous land, through dense undergrowth; asc. 197 ft. over a SW. slope.
- 4.50 Spur, projects NW.; enter aspen timber; asc. 150 ft. along a N. slope.
- 16.00 Top of rise; desc. 156 ft. over a NE. slope.
- 28.00 Gulch, drains NW.; asc. 163 ft. over a NW. changing to N. slope.
- 38.86 The closing cor. of secs. 12 and 13, on the E. bdy. of the T. monumented, with an iron post, $2\frac{1}{2}$ ins. in diam., conforming to the record of the resurvey of the W. bdy. of T. 1 S., R. 7 E.
- From the above cor., the cor. of secs. 7 and 18, T. 1 S., R. 7 E., monumented with an iron post, $2\frac{1}{2}$ ins. in diam., bears S. 0°08' E., .79 lks. dist.
- Land, mountainous.
Soil, rocky clay.
Timber, patches of dense aspen, scattered pine and fir.
Undergrowth, patches of dense oak, mahogany, medium dense service berry, mountain. laural and choke cherry.
- From the cor. of secs. 11, 12, 13, and 14.

Dependent Resurvey of a portion of the subdivision of T. 1 S., R. 6 E.

CHAINS

- N. $0^{\circ} 22'$ W., bet. secs. 11 and 12.
- Over mountainous land, through medium dense timber, by triangulation; desc. 150 ft. over a NE. slope.
- 8.00 Jeep road, at bend, bears W. and N. 10° E.; thence along a W. slope.
- 18.00 Weber River, 90 lks. wide, 4 ft. deep, flows SW.; thence over nearly level meadow land.
- 24.22 Center of State Highway No. 213, bears NE. and SW.; end of one triangulation, beginning of another, asc. 459 ft. over a broken SE. slope, through dense undergrowth.
- 40.11 Point for the $\frac{1}{4}$ sec. cor. of secs. 11 and 12, at proportionate dist.; there is no remaining evidence of the original cor., end of triangulation.
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 4 ins. in the ground, to solid rock, and in a mound of stone, 5 ft. base, to top, with brass cap mkd.
- T1S R6E
 $\frac{1}{2}$
S11|S12
1965
- Deposit the original cor. in the mound, alongside the iron post.
- Asc. 427 ft. over a broken SE. slope, through dense undergrowth.
- 60.165 Point for the N. $\frac{1}{16}$ cor. of secs. 11 and 12, at proportionate dist.
- Over a cross (X) cut in solid rock. Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., in a mound of stone, 4 ft. base, to top, with brass cap mkd.
- T1S R6E
N $\frac{1}{16}$
S11|S12
1965
- Asc. 214 ft. over a broken SE. slope, through dense undergrowth.
- 69.20 Spur, projects SW.; enter fir timber; desc. 60 ft. over a NE. slope.
- 74.60 Hollow, drains E.; asc. 42 ft. over a SE. slope.

Dependent Resurvey of a portion of the subdivision of T. 1 S., R. 6

CHAINS	
80.22	<p>The cor. of secs. 1, 2, 11 and 12, monumented with a limestone, 18x16x4 ins. firmly set in the ground, and mkd. with 1 notch on the E. and 5 notches on the S. edges, and witnessed by a small mound of stone W.</p> <p>At the cor. point.</p> <p>Set an iron post, 30 ins. long, 2½ ins. in diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T1S R6E $\frac{S2}{S11} \frac{S1}{S12}$ 1965</p> <p>Rebuild the mound of stone W., 3 ft. base, 2½ ft. high.</p> <p>Bury the original cor. alongside the iron post.</p> <p>Land, mountainous. Soil, rocky clay, with a considerable amount of broken and exposed sandstone. Timber, patches of dense aspen, fir, and pine. Undergrowth, patches of dense mahogany, oak, scattered service berry.</p>
40.17	<p>S. 89° 52' E., bet. secs. 1 and 12.</p> <p>Over mountainous land, through scattered timber and dense undergrowth; desc. 720 ft. over a broken SE. slope.</p> <p>Point for the 1/4 sec. cor. of secs. 1 and 12, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 30 ins. long, 2½ ins. in diam., 8 ins. in the ground, to solid rock, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T1S R6E $\frac{1}{4} \frac{S1}{S12}$ 1965</p> <p>Desc. 280 ft. over an E. slope, through dense undergrowth.</p>
47.99	<p>Power line, bears NE. and SW.</p>
48.77	<p>Center of State Highway No. 213, bears NE. and SW.; thence over meadow land.</p>
55.30	<p>Right bank of the Weber River, 3 ft. deep, flows SW.</p>

Dependent Resurvey of a portion of the subdivision of T. 1 S., R. 6 E.

CHAINS

56.30 Left bank of the Weber River; asc. 600 ft. over a NW. slope through dense timber.

79.08 The closing cor. of secs. 1 and 12, on the E. bdy. of the T. monumented with an iron post, 2½ ins. in diam., conforming to the record of the resurvey of the W. bdy. of T. 1 S., R. 7 E.

From the above cor., the cor. of secs. 6 and 7, T. 1 S., R. 7 E., monumented with an iron post, 2½ ins. in diam., bears S. 0°20' E., 2.00 chs. dist.

Land, mountainous.
Soil, rocky clay, in the mountains, silt loam, in the meadow land along the Weber River.
Timber, patches of dense pine and aspen.
Undergrowth, areas of dense mahogany, oak, service berry and choke cherry.

From the cor. of secs. 1, 2, 11 and 12.

N. 0°09' W., bet. secs. 1 and 2.

Over mountainous land, through medium timber, asc. 50 ft. over a SE. slope.

2.70 Spur, projects E.; desc. 40 ft. over a N. slope.

7.00 Small ravine, drains E.; asc. 40 ft. over a S. slope.

11.00 Spur, projects E.; desc. 107 ft. over a NE. slope.

18.90 Small gully, drains SE.; asc. 40 ft. over a S. slope.

28.90 Spur, projects NE.; desc. 178 ft. over a N. slope.

38.50 Gully, drains E.; asc. 48 ft. over a S. slope.

39.94 Point for the ¼ sec. cor. of secs. 1 and 2, at proportionate dist., there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. in diam., 6 ins. in the ground, to solid rock, and in a mound of stone, 5 ft. base, to top, with brass cap mkd.

T1S R6E

¼
S2|S1

1965

Asc. 314 ft. over a S. slope, through dense mahogany.

50.40 Spur, projects E.; desc. 300 ft. over a N. slope.

61.30 Draw, drains E.; asc. 30 ft. over a S. slope.

64.70 Small spur, projects E.; desc. 60 ft. over a N. slope.

70.86 Stream in bottom of draw, 3 lks. wide, 2 ins. deep, flows E.; asc. 128 ft. over a SW. slope.

Dependent Resurvey of a portion of the subdivision of T. 1 S. R. 6

CHAINS

76.54

The closing cor. of secs. 1 and 2, on the N. bdy. of the T., monumented with a sandstone, 20x14x6 ins., firmly set in a mound of stone, and mkd., with 1 grove on the E. 5 groves on the W., and CC on the S. face.

At the cor. point.

Set an iron post, 30 ins. long, 2½ ins. in diam., 20 ins. in the ground, with brass cap mkd.

S35
S2|S1
C C

T1S R6E

1965

Raise a mound of stone 3 ft. base, 2 ft. high W. of the cor.

Deposit the original cor. in the mound alongside the iron post.

From the above cor., the cor. of secs. 35 and 36, T. 1 N., R. 6 E., hereinbefore described, bears N. 89°05' E., 16.88 chs. dist.

Land, mountainous.

Soil, rocky clay, with a considerable amount of broken and exposed sandstone.

Timber, scattered patches of dense aspen, pine and fir. Undergrowth, areas of dense mahogany, oak, medium dense sagebrush and service berry.

Point for the N. ¼ sec. cor. of sec. 1, at proportionate distance, bet. the closing cor. of secs. 1 and 2, and the closing cor. of secs. 1 and 6.

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.

¼ S1
T1S R6E

1965

from which

A aspen, 6 ins. in diam., bears S. 0°15' W., 1.66 chs. dist., mkd. ¼S1 BT.

From the above cor. the standard ¼ sec. cor. of sec. 36, T. 1 N., R. 6 E., bears N. 89°10' E., 16.90 chs. dist., hereinbefore described.

Reestablishment of the survey executed
by Joseph Gorkinski in 1869

Dependent Resurvey of a portion of the subdivision of T. 1 S., R. 6 E.

CHAINS

From the cor. of secs. 2, 3, 34 and 35, on the S. bdy. of the T., monumented with a iron post, 2 ins. in diam., conforming to the record, of the Gentry 1931 resurvey.

N. 0°02' E., bet. secs. 34 and 35.

Over mountainous land, through scattered timber, and dense undergrowth; 35 ft. over a S. slope.

- 3.22 Trail, bears E. and W.; asc. 285 ft. over a S. slope.
- 20.30 Spur, projects S. 60° W.; desc. 200 ft. over a NW. slope.
- 25.20 Draw, drains S. 85° W.; asc. 100 ft. over a S. slope.
- 34.00 Spur, projects W.; desc. 150 ft. over a NW. slope.
- 39.84 Point for the $\frac{1}{2}$ sec. cor. of secs. 34 and 35, at proportionate dist., there is no remaining evidence of the original cor.
- Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. in diam., 24 ins. in the ground, with brass cap mkd.

T1S R6E

$\frac{1}{2}$

S34 S35

1965

Raise a mound of stone, 3 ft. base, 2 $\frac{1}{2}$ ft. high W. of the cor.

Desc. 50 ft. over a NW. slope.

- 43.70 Jeep road, bears irregularly E. and W.; desc. 35 ft. over a N. slope.
- 48.00 Bottom of draw, stream, 6 lks. wide, 4 ins. deep, flows W.; asc. 800 ft. over a S. slope, through dense undergrowth.
- 70.30 Spur, projects S. 60° W.; desc. 203 ft. over a broken NW. slope; enter timber.
- 79.69 The cor. of secs. 26, 27, 34 and 35, monumented with a sandstone, 14x14x5 ins. set in a mound of stone, and mkd. with 2 groves on the E. and 1 grove on the S. faces.
- At the cor. point.
- Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. in diam., 14 ins. in the ground, to solid rock, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.

T1S R6E

S27	S26
S34	S35

1965

pendent Resurvey of a portion of the subdivision of T 1 S R
 CHAINS

from which

A fir, 16 ins. in diam., bears N. 20° E., 61 lks. dist., mkd. T1S R6E S26 BT.

A fir, 24 ins. in diam., bears S. 27° W., 35 lks. dist., mkd. T1S R6E S34 BT.

A fir, 16 ins. in diam., bears N. 60° W., 29 lks. dist., mkd. T1S R6E S27 BT.

Deposit the original cor. in the mound, alongside the iron post.

Land, mountainous.

Soil, rocky clay, with broken and exposed sandstone.

Timber, scattered juniper, aspen and pine, the first 70.00 chs. medium dense fir, the balance.

Undergrowth, medium dense, mahogany, oak and service berry.

N. 89°04' E., bet. secs. 26 and 35.

Over mountainous land, through medium dense timber; asc. 480 ft. over a NW. slope.

21.00 Leave timber; enter dense undergrowth; asc. 192 ft. over a NW. slope.

24.00 Enter dense timber; asc. 40 ft. over a W. slope.

33.10 Top of rise; desc. 37 ft. over a E. slope.

39.16 The cor. originally set for the ¼ sec. cor. of secs. 26 and 35, monumented with a sandstone, 14x8x5 ins. set in a mound of stone, and mkd. ¼ on the N. face.

This cor. will now function as the N. ¼ sec. cor. of sec. 35 only.

At the cor. point.

Set an iron post, 30 ins. long, 2½ ins. in diam., 15 ins. in the ground, to solid rock, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.

T1S R6E

¼S35

1965

from which

A aspen, 5 ins. in diam., bears S. 35°30' E., 33 lks. dist., mkd. T1S R6E ¼S35 BT.

Deposit the original cor. in the mound, alongside the iron post.

N. 89° 54' E., beginning new measurement.

12.09 The cor. of secs. 25 and 26 previously described.

Dependent Resurvey of a portion of the subdivision of T. 1 S., R. 6 E.

CHAINS

Land, mountainous.
Soil, rocky clay, loam.
Timber, medium dense aspen, pine and fir.
Undergrowth, patches of dense oak, service berry and choke cherry.

Reestablishment of the Resurvey executed
by Baxter and Blossom in 1899

From the cor. of secs. 26, 27, 34 and 35.

N. 0° 09' E., bet. secs. 26 and 27.

Over mountainous land, through scattered timber, and
dense undergrowth; desc. 330 ft. over a NW. slope.

14.00 Draw, drains W.; asc. 150 ft. over a SW. slope.

28.00 Spur, projects NW.; desc. 67 ft. over a N. slope.

32.70 Swale, drains W.; asc. 18 ft. along a W. slope.

40.42 The 1/4 sec. cor. of secs. 26 and 27, monumented with a
sandstone 14x10x5 ins. firmly set in the ground, and
mkd. 1/4 on the W. face.

At the cor. point.

Set an iron post, 30 ins. long, 2½ ins. in diam., 20 ins.
in the ground, and in a mound of stone, 3 ft. base, to
top, with brass cap mkd.

T1S R6E

½
S27 | S26

1965

Bury the original cor. alongside the iron post.

N. 0° 08' W., beginning new measurement.

Over mountainous land, through dense timber; asc. 100
ft. over a W. slope.

10.00 Head of gulch, drains W.; asc. 250 ft. over a SW. slope.

40.08 The closing cor. of secs. 23 and 26, hereinafter des-
cribed. Thence bet. secs. 23 and 27.

40.93 The cor. of secs. 22 and 27, monumented with a sandstone,
14x6x6 ins. firmly set in the ground, and mkd. with 2
notches on the S. and E. edges, and witnessed by a mound
of stone, W.

At the corner point.

Dependent Resurvey of a portion of the subdivision of T. 1 S., R. 6

CHAINS

Set an iron post, 30 ins. long, 2½ ins. in diam., 15 ins. in the ground, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.

T1S R6E

$$\frac{S22}{S27} | S23$$

1965

Rebuild the mound of stone, W. 3½ ft. base 3 ft. high.

Deposit the original cor. in the mound alongside the iron post.

Land, mountainous.

Soil, rocky clay, with a considerable amount of broken and exposed sandstone.

Timber, patches of dense aspen and pine on the N. slopes.

Undergrowth, dense oak and mahogany.

Reestablishment of the survey executed by Baxter and Blossom in 1899

From the cor. of secs. 23, 24, 25 and 26.

N. 89° 59' W., between secs. 23 and 26.

Over mountainous land, through dense aspen timber; desc. 20 ft. over a NW. slope.

3.00 Jeep road, bears irregularly NW. and SE.

3.70 Swale, drains N.; asc. 20 ft. over a NE. slope.

4.50 Small spur, projects N.; desc. 60 ft. over a W. slope.

9.40 Bottom of canyon, drains NW.; asc. 262 ft. over a NE. slope.

30.40 Spur, projects NW., leave timber, enter dense undergrowth; desc. 320 ft. over a W. slope.

40.02 The ¼ sec. cor. of secs. 23 and 26, monumented with a sandstone, 16x10x8 ins. firmly set in the ground, and mkd. 1/4 on the N. face.

At the cor. point.

Set an iron post, 30 ins. long, 2½ ins. in diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.

T1S R6E

$$\frac{1}{2} \frac{S23}{S26}$$

1965

Dependent Resurvey of a portion of the subdivision of T. 1 S., R. 6 E.

CHAINS

Raise a mound of stone, 3 ft. base, 2 ft. high,
N. of the cor.

Bury the original cor. alongside the iron post.

N. 89° 58' W., beginning new measurement.

Over mountainous land, through dense undergrowth; desc.
363 ft. over a SW. slope.

11.28

The closing cor. of secs. 23 and 26, monumented with a
sandstone, 15x8x4 ins. firmly set in the ground, and
mkd. with 2 groves on the S., 2 groves and CC on the
E. face, and witnessed by a small mound of stone, E.

At the cor. point.

Set an iron post, 30 ins. long, 2½ ins. in diam., 18 ins.
in the ground, to solid rock, and in a mound of stone,
4 ft. base, to top, with brass cap mkd.

T1S R6E.

S27 | S23 C C.
 | S26

1965

Rebuild the mound of stone, E. 3 ft. base, 2½ ft.
high.

Deposit the original cor. in the mound, alongside
the iron post.

From this point, the cor. of secs. 22 and 27 previously
described, bears N. 0° 08' W., 0.85 chs. dist.

Land, mountainous.

Soil, rocky clay, with broken and exposed sandstone.

Timber, medium dense aspen and pine, on the N. and E.
slopes.

Undergrowth, dense oak and service berry, on the S.
and W. slopes.

Reestablishment of the resurvey executed
by Baxter and Blossom in 1899

From the cor. of secs. 22 and 27.

N. 0° 28' W., along the E. bdy. of sec. 22.

Over mountainous land, through dense undergrowth; asc.
140 ft. over a SW. slope.

19.955

Point for the S. 1/16 cor. of sec. 22, at proportionate
dist.

Set an iron post, 30 ins. long, 2½ ins. in diam., 16 ins.
in the ground, to solid rock, and in a mound of stone, 3
ft. base, to top, with brass cap mkd.

T1S

R6E

S1

16

S22

1965

Dependent Resurvey of a portion of the subdivision of T. 1 S., R. 6 E.

CHAINS

Asc. 35 ft. over a SW. slope.

24.30 Spur ridge, projects N. 10° W.; desc. 330 ft. over a NE. slope, through dense pine timber.

39.135 Point for the 1/4 sec. cor. of sec. 23, at midpoint bet. closing cors.

Set an iron post, 30 ins. long, 2½ ins. in diam., 18 ins. in the ground, to solid rock, and in a mound of stone, 3 ft. base, to top, with brass cap mkd..

T1S

R6E

½

S23

1965

from which

A fir, 14 ins. in diam., bears N. 33° E., 7 lks. dist., mkd. ½S23 BT.

Desc. 15 ft. over a NE. slope.

39.91 Point for the 1/4 sec. cor. of sec. 22, at proportionate dist., there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. in diam., 18 ins. in the ground, to solid rock, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.

T1S

R6E

½

S22

1965

from which

A fir, 16 ins. in diam., bears S. 61° W., 28 lks. dist., mkd. ½S22 BT.

Desc. 400 ft. over a NE. slope, through dense pine and fir.

59.815 Point for the N. 1/16 cor. of sec. 22, at proportionate dist.

Set an iron post, 30 ins. long, 2½ ins. in diam., 20 ins. in the ground, with brass cap mkd.

T1S

R6E

N1

16

S22

1965

Raise a mound of stone, 3 ft. base, 2½ ft. high, W. of the cor.

Dependent Resurvey of a portion of the subdivision of T. 1 S., R. 6 E.

CHAINS

79.12 The closing cor. of secs. 14 and 23, monumented with an iron post, 2½ ins. in diam., set, mkd. and witnessed as described in the 1962 record of the remonumentation program.

79.72 The cor. of secs. 15 and 22, monumented with a boulder, 14x10x5 inches firmly set in the ground, and mkd. with 3 notches on the S. and 2 notches on the E. edges.

At the cor. point.

Set an iron post, 30 ins. long, 2½ ins. in diam., 16 ins. in the ground, to solid rock, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.

T1S R6E

S15 | S14
S22 |

1965

Deposit the original cor. in the mound alongside the iron post.

Land, mountainous.

Soil; rocky clay.

Timber, dense pine and fir, on the N. and E. slopes.

Undergrowth, medium dense, oak, mahogany and service berry on the S. and W. slopes.

Reestablishment of the survey executed by Baxter and Blossom in 1899

From the cor. of secs. 13, 14, 23 and 24.

N. 89°54' W.; bet. secs. 14 and 23.

Over mountainous land, through dense pine timber; desc. 102 ft. along a N. slope.

4.20 Stream, 2 lks. wide, 2 ins. deep, flows irregularly NW.; desc. 50 ft. along a N. slope.

7.50 Recross stream, flows S. 85° W.; leave timber, enter dense undergrowth; asc. 31 ft. along a S. slope.

9.40 Top of rise; desc. 25 ft. along a S. slope.

21.70 Gully, drains S.; asc. 56 ft. along a S. slope.

34.80 Spur, projects S. 60° W.; desc. 21 ft. along a S. slope.

39.73 The ¼ sec. cor. of secs. 14 and 23, monumented with a quartzite, 16x8x6 ins. firmly set in the ground, and mkd. ¼ on the N. face.

At the cor. point.

Set an iron post, 30 ins. long, 2½ ins. in diam., 10 ins. in the ground, to solid rock, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.

Dependent Resurvey of a portion of the subdivision of T. 1 S. R. 6

CHAINS

T1S R6E

 $\frac{1}{2}$ $\frac{S14}{S23}$

1965

Deposit the original cor. in the mound alongside the iron post.

N. 89°56' W., beginning new measurement.

Desc. 221 ft. over a SW. slope.

- 3.45 Gully, drains SW.; desc. 105 ft. along S. slope.
- 8.00 Jeep road, bears NW. and SE.; desc. 10 ft.
- 9.20 Stream, 2 lks. wide, 2 ins. deep, flows N. 80° W.; thence along a N. slope, enter dense timber.
- 11.96 The closing cor. of secs. 14 and 23, hereinbefore described.

From the above cor., the cor. of secs. 15 and 22, hereinbefore described, bears N. 0°28' W., .60 lks. dist.

Land, mountainous.
Soil, rocky clay, with broken and exposed sandstone.
Timber, dense pine and fir, on the N. slopes.

Undergrowth, dense oak and mahogany on the S. and W. slope.

From the cor. of secs. 15 and 22.

N. 0°02' E., along the E. bdy. of sec. 15.

Over mountainous land, through dense timber; desc. N. slope.

- .10 Bottom of canyon, stream 2 lks. wide, 3 ins. deep, flows W.
- .90 Jeep road, bears E. and W.; leave timber, enter dense undergrowth; asc. 55 ft. over a SW. slope.
- 3.85 Jeep road, bears E. and W.; asc. 510 ft. over a SW. slope, through dense undergrowth.
- 22.60 Spur, projects W.; desc. 440 ft. over a NW. slope, through dense undergrowth and medium dense pine and fir timber.
- 39.07 Point for the $\frac{1}{2}$ sec. cor. of sec. 14, at midpoint bet. closing cors.

Set an iron post, 30 ins. long, 2½ ins. in diam., 18 ins. in the ground, to solid rock, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.

Dependent Resurvey of a portion of the subdivision of T. 1 S., R. 6 E.

CHAINS

T1S R6E

1/4
S14

1965

Deposit a stone, 8x6x2 ins., mkd. with a cross (X), at the base of the iron post.

Desc. 50 ft. over a NW. slope.

40.21 The 1/4 sec. cor. of sec. 15, monumented with a quartzite 18x12x10 ins. firmly set in a mound of stone, and mkd. 1/4 on the W. face.

At the cor. point.

Set an iron post, 30 ins. long, 2 1/2 ins. in diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.

T1S R6E

1/4
S15

1965

Bury the original cor. alongside the iron post.

N. 0° 02' W., beginning new measurement.

Over mountainous land, through dense undergrowth and medium dense timber, desc. 400 ft. over a N. slope.

12.10 Jeep road, bears N. 45° E., and S. 85° W.; desc. 65 ft. over a N. slope.

14.60 Left bank of Weber River, 2 ft. deep, flows SW.

16.00 Right bank of Weber River.

19.54 Point for the N. 1/16 cor. of sec. 15, at proportionate dist.

Set an iron post, 30 ins. in diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.

T1S

R6E

N1

1/16

S14

1965

Deposit a stone, 4x4x4 ins., mkd. with a cross (X) at the base of the iron post.

19.54 Point for the N 1/16 cor. of Sec 15, not monumented.

23.40 Center of State Highway 213, bears irregularly NE. and SW.; asc. 200 ft. over a SE. slope.

33.80 Spur, projects SE.; asc. 100 ft. along an E. slope.

Dependent Resurvey of a portion of the subdivision of T. 1 S., R. 6

CHAINS

- 38.53 The closing cor. of secs. 11 and 14, hereinafter described.
- 39.08 The NE. cor. of sec. 15, monumented with a sandstone, 16x12x6 ins. firmly set in a mound of stone, and mkd. with 4 notches on the S. and 2 notches on the E. edges.
- At the cor. point.
- Set an iron post, 30 ins. long, 2½ ins. in diam., 14 ins. in the ground, to solid rock, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.
- T1S
R6E
S15
- 1965
- Deposit the original cor. in the mound, alongside the iron post.
- Land, mountainous.
Soil, rocky clay.
Timber, medium dense pine, fir and aspen on the N. slopes.
Undergrowth, dense oak, medium dense mahogany on the S. and W. slopes.

- From the cor. of secs. 11, 12, 13 and 14.
- N. 89° 59' W., bet. secs. 11 and 14.
- Over mountainous land, through dense undergrowth; asc. 50 ft. along a N. slope.
- 5.00 Jeep road, on spur, road bears E. and SW., spur projects NW.; desc. 100 ft. over a NW. slope.
- 20.50 Left bank of the Weber River, 2 ft. deep, flows SW.
- 22.50 Right bank of river.
- 34.40 Power line, bears irregularly NE. and SW.
- 35.82 Center of State Highway 213, bears irregularly NE. and SW.; asc. 100 ft. over a SE. slope.
- 39.85 Point for the 1/4 sec. cor. of secs. 11 and 14, at proportionate dist., there is no remaining evidence of the original cor.
- Set an iron post, 30 ins. long, 2½ ins. in diam., 14 ins. in the ground, to solid rock, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.
- T1S R6E
½ S11
S14
- 1965
- Asc. 100 ft. over a SE. slope, through dense undergrowth.

Dependent Resurvey of a portion of the subdivision of T. 1 S., R. 6 E.

CHAINS

51.81

The closing cor. of secs. 11 and 14, monumented with a sandstone, 17x8x8 ins. firmly set in the ground, and mkd. with 4 groves on the S. 2 groves and CC on the E. face.

At the cor. point.

Set an iron post, 30 ins. long, 2½ ins. in diam., 14 ins. in the ground, to solid rock, and in a mound of stone, 3½ ft. base, to top, with brass cap mkd.

T1S R6E

S15 | S11
 | S14

1965

Deposit the original cor. in the mound alongside the iron post.

From the above cor. the NE. cor. of sec. 15, hereinbefore described, bears N. 0°02' W., 55 lks. dist.

Land, mountainous.

Soil, rocky clay, with exposed broken sandstone.

Timber, pine and firm, on the N. slopes.

Undergrowth, dense oak and medium dense mahogany on the S. and W. slopes.

From the NE. cor. of sec. 15.

N. 89°22' W., along the N. bdy. of sec. 15.

Over mountainous land, through dense undergrowth; asc. 322 ft. over a broken SE. slope.

13.90

Spur, projects S.; desc. 149 ft. over a SW. slope.

28.22

The cor. of secs. 10 and 11, monumented with a sandstone, 16x13x10 ins. firmly set in the ground, and mkd., with 2 notches on the E. and 4 notches on the S. edges, and witnessed by a small mound of stone N.

At the cor. point.

Set an iron post, 30 ins. long, 2½ ins. in diam., 22 ins. in the ground, with brass cap mkd.

T1S R6E

S10 | S11
 | S15

1965

Raise a mound of stone, 3 ft. base, 2 ft. high, N. of the cor.

Bury the original cor. alongside the iron post.

N. 0°09' W., bet. secs. 10 and 11.

Over mountainous land, through dense undergrowth; asc. 773 ft. over a broken S. slope.

Dependent Resurvey of a portion of the subdivision of T. 1 S. R. 6

CHAINS

- 20.10 Spur, projects SW.; desc. 489 ft. over a NW. slope, through dense undergrowth and scattered timber.
- 39.31 Point for the $\frac{1}{2}$ sec. cor. of sec. 11, at midpoint in northing bet. the closing cor. of secs. 11 and 14 and the closing cor. of secs. 2 and 11.
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 16 ins. in the ground, to solid rock, and in a mound of stone, $3\frac{1}{2}$ ft. base, to top, with brass cap mkd.
- T1S R6E
| $\frac{1}{2}$ S11
1965
- 39.79 The $\frac{1}{2}$ sec. cor. of sec. 10, monumented with a sandstone, 18x9x6 ins. firmly set in a mound of stone and mkd. $\frac{1}{2}$ on the W. face.
- At the cor. point.
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 8 ins. in the ground, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.
- T1S R6E
 $\frac{1}{2}$ S10|
1965
- From which
- A fir, 9 ins. in diam., bears N. $74^{\circ}45'$ W., 27 lks. dist., mkd. $\frac{1}{2}$ S10 BT.
- Deposit the original cor. in the mound alongside the iron post.
- _____
- N. $0^{\circ}27'$ E., beginning new measurement.
- Over mountainous land, through dense timber; desc. 18 ft. over a NW. slope.
- 1.40 Gulch, drains W.; leave timber; asc. 30 ft. over a SW. slope, through dense undergrowth.
- 4.20 Spur, projects NW.; desc. 116 ft. over a N. slope.
- 12.40 Enter dense timber; desc. 176 ft. over a N. slope.
- 19.25 Stream, 4 lks. wide, 2 ins. deep, flows W.; asc. 422 ft. over a S. slope, through dense undergrowth, leave timber.
- 29.20 Small spur, projects SE.; desc. 50 ft. along a E. slope.
- 39.70 The closing cor. of secs. 2 and 11, hereinafter described.

Dependent Resurvey of a portion of the subdivision of T. 1 S., R. 6 E.

CHAINS

40.30

The cor. of secs. 3 and 10, monumented with a limestone, 18x8x5 ins. firmly set in a small mound of stone, and mkd., with 2 notches on the E. and 5 notches on the S. edges.

At the cor. point.

Set an iron post, 30 ins. long, 2½ ins. in diam., 15 ins. in the ground, to solid rock, and in a mound of stone, 3½ ft. base, to top, with brass cap mkd.

T1S R6E

$$\frac{S3}{S10} | S2$$

1965

Deposit the original cor. in the mound alongside the iron post.

Land, mountainous.

Soil, rocky clay, with a considerable amount of broken sandstone.

Timber, patches of fir, pine and aspen on the N. and E. slopes.

Undergrowth, dense mahogany, oak and service berry on the S. and W. slopes.

From the cor. of secs. 1, 2, 11 and 12.

S. 89°39' W., bet. secs. 2 and 11.

Over mountainous land, through dense timber; asc. 20 ft. over a E. slope.

1.20 Top of rock rib, slopes NE.; asc. 30 ft. over a E. slope.

6.00 Spur, projects N. 30° W.; desc. 150 ft. over a W. slope.

37.90 Spur, projects S.; desc. 40 ft. along a SW. slope.

39.63 The ½ sec. cor. of secs. 2 and 11, monumented with a limestone, 12x10x8 ins. firmly set in the ground, and mkd. ½ on the N. face.

At the cor. point.

Set an iron post, 30 ins. long, 2½ ins. in diam., 16 ins. in the ground, to solid rock, and in a mound of stone, 3½ ft. base, to top, with brass cap mkd.

T1S R6E

$$\frac{1}{2} \frac{S2}{S11}$$

1965

Deposit the original cor. in the mound alongside the iron post.

Dependent Resurvey of a portion of the subdivision of T. 1 S., R. 6

CHAINS

- N. 89°28' W., beginning new measurement.
- Over mountainous land, through dense undergrowth; thence along a broken S. slope.
- 17.40 Spur, projects S.; desc. 145 ft. over a W. slope.
- 36.40 Bottom of draw, stream, 3 lks. wide, 4 ins. deep, flows S.; asc. 134 ft. over a broken E. slope.
- 39.92 The closing cor. of secs. 2 and 11, monumented with a limestone, 16x12x6 ins. set in a mound of stone, and mkd. with 5 groves on the S. 2 groves and CC on the E. face.
- At the cor. point.
- Set an iron post, 30 ins. long, 2½ ins. in diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.
- T1S R6E
S10 | S2 CC
 | S11
1965
- Bury the original cor. alongside the iron post.
- From the above cor., the cor. of secs. 3 and 10 previously described, bears N. 0°27' E., 60 lks. dist.
- Land, mountainous.
Soil, rocky clay, with a considerable amount of broken sandstone.
Timber, medium dense fir, pine and aspen on the N. slopes.
Undergrowth, medium dense, mahogany, oak and service berry on the S. and W. slopes.
-
- From the cor. of secs. 3 and 10.
- N. 0°11' W., along the E. bdy. of sec. 3.
- Over mountainous land, through dense undergrowth; thence by triangulation; asc. 350 ft. along a SE. slope.
- 24.20 Spur, projects S. 20° W.; desc. 40 ft. over a NW. slope.
- 28.00 Gully, drains SW.; asc. 50 ft. over a SW. slope.
- 33.00 Small spur, projects NW., enter aspen timber; desc. 153 ft. over a N. slope.
- 39.23 Point for the ¼ sec. cor. of sec. 2, at proportionate dist.
- Set an iron post, 30 ins. long, 2½ ins. in diam., 18 ins. in the ground, and in a collar of stone, with brass cap mkd.

Dependent Resurvey of a portion of the subdivision of T. 1 S., R. 6 E.

CHAINS

T1S R6E

1/2
S2

1965

40.14

The 1/2 sec. cor. of sec. 3, monumented with a sandstone, 18x8x3 ins. firmly set in the ground, and mkd. 1/2 on the W. face.

At the cor. point.

Set an iron post, 30 ins. long, 2 1/2 ins. in diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

T1S R6E

1/2
S3

1965

from which

A boulder, 6x5x4 ft. above ground, bears N. 32°28'W. 2.46 chs. dist., mkd. BO.

X

The SE. cor. of a corral, bears N. 65°39' W., 1.54 chs. dist.

Bury the original cor. alongside the iron post.

N. 0°04' W., beginning new measurement.

Over mountainous land, through medium dense undergrowth; desc. 10 ft. over a N. slope.

1.00

Bottom of swale; asc. 25 ft. over a S. slope.

10.10

Jeep road, bears irregularly NE. and SW.; asc. 298 ft. over a S. slope.

34.89

Intersect the N. bdy. of the T.

Point for the closing cor. of secs. 5 and 6, T. 1 S., R. 6 E.

Set an iron post, 30 ins. long, 2 1/2 ins. in diam., 10 ins. in the ground, to solid rock, and in a mound of stone, 3 1/2 ft. base, to top, with brass cap mkd.

S3 | S2
C C

T1S R6E

1965

From this cor. the standard cor. of secs. 34 and 35, T. 1 N., R. 6 E., hereinbefore described, bears N. 88°53' E., 16.81 chs. dist.

Dependent Resurvey of a portion of the subdiv. T. 1 S.

CHAINS

35.20

The original closing cor. of secs. 2 and 3, monumented with a limestone, 14x8x5 ins. above ground, mkd., with 2 groves on the E. 4 groves on the W., and CC on the S. face.

I destroy the original marks and remark the stone with "AM."

Land, mountainous.

Soil, rocky clay.

Timber, medium dense aspen on the N. slopes.

Undergrowth, medium dense oak, mahogany and service berry on the S. and W. slopes.

Point for the N. $\frac{1}{4}$ sec. cor. of sec. 2, at proportionate distance between the closing cor. of secs. 1 and 2, and the closing cors. of secs. 2 and 3.

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. in diam., 20 ins. in the ground, with brass cap mkd.

$\frac{1}{4}$ S2
T1S R6E

1965

from which

A aspen 3 ins. in diam., bears S. 56° E., 49 lks. dist., mkd. $\frac{1}{4}$ S2 BT.

From the above cor. the standard $\frac{1}{4}$ sec. cor. of sec. 35, T. 1 N., R. 6 E., bears N. 89°37' E., 17.21 chs. dist., hereinbefore described.

General Description

The land in T. 1 S., R. 6 E., covered by this survey, is all mountainous. The soil is mostly a rocky clay, with a alluvial silt and loam, in the meadow land along the Weber River. The general elevation ranges from about 6,800 ft. above sea level along the Weber River in the NE. cor. of the T., to about 1,000 ft. above sea level in sec. 36. The timber consists of areas of dense aspen and pine, with lesser amounts of fir and balsom, the undergrowth is mostly oak, mahogany and service berry, with smaller amounts of choke cherry and sagebrush. The township is accessible from highway 213, which crosses the NE. cor. of the township.

CERTIFICATE OF SURVEY

I, Fred R. Chappell, HEREBY CERTIFY upon honor that,
 in pursuance of special instructions bearing date of the 19th day of June, 1964,
 I have dependently resurveyed a portion of the South boundary, (Salt Lake
 Line) T. 1 N., R. 6 E., and a portion of the subdivision lines of Township
 South, Range 6 East.

of the Salt Lake Meridian, in the State of Utah, which
 are represented in the foregoing field notes as having been executed by me and under my direction;
 and that said survey has been made in strict conformity with said special instructions, the Manual
 of Instructions for the Survey of the Public Lands of the United States, and in specific manner
 described in the foregoing field notes.

May 3, 1966

(Date)

Fred R. Chappell
 (Cadastral Surveyor)
 SUPERVISORY

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

SUBMITTED FOR APPROVAL
 Date JUN 6 1967

BUREAU OF LAND MANAGEMENT,
 Washington, D. C.

The foregoing field notes of the resurvey of a portion of the South boundary (Salt
 Lake Base Line) T. 1 N., R. 6 E., and a portion of the subdivisional lines
 of T. 1 S., R. 6 E., Salt Lake Meridian, Utah.

executed by Fred R. Chappell, Supervisory Cadastral Surveyor
 having been critically examined and found correct, are hereby approved.

SEP 7 1967

(Date)

E. P. Livingston
 (Chief, Division of Engineering)

CERTIFICATE OF TRANSCRIPT

~~I CERTIFY That the foregoing transcript of the field notes of the above described surveys in~~
~~, is a true copy of the original field notes.~~

~~(Date)~~

~~(Chief, Division of Engineering)~~

Blank

Page

Blank

Page

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
ORIGINAL

403

FIELD NOTES

OF THE

DEPENDENT RESURVEY

OF

A PORTION OF THE SOUTH BOUNDARY OF T. 1 N., R. 7 E. (SALT LAKE BASE LINE)

THE WEST BOUNDARY

AND

A PORTION OF THE SUBDIVISION LINES

OF

TOWNSHIP 1 SOUTH, RANGE 7 EAST

Of the SALT LAKE Meridian,

In the State of UTAH

EXECUTED BY

FRED R. CHAPPELL

SUPERVISOR CADASTRAL SURVEYOR

Under special instructions dated JUNE 19, 19 64, which provided for the surveys
included under Group Number 472, approved JUNE 22, 1964,
and assignment instructions dated MAY 7, 19 65.

Survey commenced JUNE 21, 19 65

Survey completed SEPTEMBER 9, 19 65

INDEX DIAGRAM

Township 1 SOUTH, Range 7 EAST
2 4

14	6 31 30	5 20 29	4	3	2	1
12	7 27 26	8 19 25	9	10	11	12
10	18 23 23	17 17 22	16	15	14	13
8	19	20	21	22	23	24
7	30	29	28	27	26	25
5	31	32	33	34	35	36

Dependent Resurvey of a Portion of Township 1 South, Range 7 East

CHAINS

Township 1 South, Range 7 East, of the Salt Lake Meridian, Utah, is located within the Wasatch National Forest. The west 4 miles of the north boundary, of T. 1 S., R. 7 E., (Salt Lake Base Line), was surveyed by Wm. Hardin, in 1872. In 1893, Adolphe Jessen, surveyed the east 2 miles and resurveyed the west 4 miles and in 1897 Baxter and Dougall retraced the west 2 miles of this boundary. The south and east boundaries were surveyed by Baxter and Dougall, in 1897, and were resurveyed by Ralph Gentry, in 1931. The north 3 miles of the west boundary were surveyed by Adolphe Jessen, in 1893, and in 1899, Baxter and Blossom surveyed the south 3 miles and retraced the north 3 miles of this boundary. In 1893, Adolphe Jessen surveyed secs. 5, 6, 7, 8, 17 and 18; and in 1897, Baxter and Dougall surveyed the remaining 30 secs., at which time they retraced the east boundary of sec. 5 and the south boundary of secs. 17 and 18.

The following field notes are those of the dependent resurvey of a portion of the south boundary (Salt Lake Base Line) of T. 1 N., R. 7 E., the west boundary and a portion of the subdivisional lines of T. 1 S., R. 7 E., Salt Lake Meridian, Utah.

The resurvey was initiated on the official request of the U. S. Forest Service because of the need for the plain marking of the lines, and the establishment of 1/16 corners where private and U. S. Forest Service Lands are adjacent to 1/16 corner points on the section lines.

The survey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions 1947, and the Special Instructions dated June 19, 1964.

Before restoring the corners, the lines of the original survey were retraced, and a diligent search made for any evidence of the original corners, bearing trees, and other calls of the original field note record. When duly identified the corner positions were remonumented.

The rules of proportionate measurement were applied in order to ascertain the position of lost corners, after completing the necessary retracements to connect with the identified corner locations, but not until exhausting every reasonable possibility of finding direct evidence for the control of each particular corner.

The direction of the lines of the survey were determined by the solar transit method, and checked by numerous altitude observations on the sun, taken throughout the progress of the survey.

The length of the lines were determined by chaining, where the lines were accessible; lines inaccessible were run by traverses and triangulation methods. Distances to topography on lines run by triangulation and traverse methods are approximate as scaled from reliable U. S. G. S. topographic sheets, the details of such triangulations or traverses have been thoroughly checked and verified and in order to simplify the record the diagrams and reductions are omitted from these field notes.

Dependent Resurvey of a Portion of Township 1 South, Range 7 East

CHAINS

The geographic position for the southwest corner of the township is at Latitude 40°41'02" N., and Longitude 111° 12'21" W., as scaled from U. S. C. & G. S. quadrangle sheet "Coalville".

The magnetic declination was read at a number of stations throughout the survey and the average of the several readings was found to be N. 16° E.

Dependent Resurvey of a Portion of the S. Bdy. of T. 1 N., R. 7 E. (Salt Lake Base Line)

Reestablishment of the surveys executed by Wm. Hardin, and Adolphe Jessen, in 1872, and 1893, respectively, and retraced by Baxter and Dougall in 1897.

The standard cor. of T. 1 N., Rs. 6 and 7 E., monumented with a sandstone, 24x18x10 inches, firmly set in the ground, and mkd. with 6 notches on the E. and W. edges and 6 notches and SC on the N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.

SC
T1N
R6E R7E
S36|S31
1965

from which

An aspen, 6 ins. in diam., bears N. 19°45' E., 42 lks. dist., mkd. T1N R7E S31 BT.

An aspen, 5 ins. in diam., bears N. 26°45' W., 36 lks. dist., mkd. T1N R6E S36 BT.

Raise a mound of stone, 3 ft. base 2 ft. high, N. of cor.

Deposit the original cor. alongside the iron post.

N. 88°57' E., along the S. bdy. of sec. 31.

Decs. 130 ft. over an east slope, along a fence, through scattered timber.

7.33

Purdue Creek, 10 lks. wide, 6 ins. deep, flows SW., leave fence, bears NE., leave timber; thence along a gentle S. slope.

13.22

Center of State Highway 213 bears N. 63°40' E., and S. 63° 40' W.

Dependent Resurvey of a Portion of the S. Bdy. of T. 1 N., R. 7 E.

CHAINS

- 16.25 Fence, bears NE. and SW., enter pasture, scattered clumps of willows.
- 25.85 Weber River, 70 lks. wide, 4 ft. deep, flows SW., thence along a barbed wire fence.
- 39.86 The standard $\frac{1}{4}$ sec. cor. of sec. 31, monumented with a sandstone, 14x10x6 ins. firmly set in the ground, and mkd. $\frac{1}{4}$ on the N. face.
- At the cor. point
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 21 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.
- SC
T1N R7E
 $\frac{1}{4}$ S31
1965
- Deposit the original cor. alongside the iron post.
-
- N. $89^{\circ}29'$ E., beginning new measurement.
- Over meadow land.
- 1.40 Leave meadow land; asc. 35 ft. along a gentle N. slope, covered with sagebrush.
- 16.30 Enter aspen timber.
- 18.34 Point for the closing cor. of secs. 5 and 6, T. 1 S., R. 7 E., hereinafter described.
- Asc. 45 ft. along a N. slope.
- 28.20 Leave aspen timber, thence along a gentle E. slope, covered with sagebrush.
- 28.70 Cor. of fences, bearing N. and E., thence along fence line.
- 40.03 The standard cor. of secs. 31 and 32, monumented with a sandstone 14x10x5 ins. firmly set in the ground, and mkd. with 5 notches on the E., 1 notch on the W. edges and SC on the N. face.
- At the cor. point
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins. in the ground, with brass cap mkd.
- SC
T1N R7E
S31|S32
1965
- Deposit the original cor. alongside the iron post.

Dependent Resurvey of a Portion of the S. Bdy. of T. 1 N., R. 7 E.

CHAINS

The above cor. is set at the cor. of fences bearing N., E. and W.

Land, gently rolling.

Soil, rocky clay.

Timber, scattered patches of aspen.

Undergrowth, medium dense sagebrush and grass, with willows along the river bottom.

N. 89°08' E., along the S. bdy. of sec. 32.

Over mountainous land, along a fence bearing irregularly E.

- 2.00 Enter timber aspen and scattered pine; asc. 30 ft. along a N. slope.
- 8.30 Small draw, drains NW.; asc. 305 ft. over a NW. slope.
- 36.90 Enter dense timber, pine and fir; asc. 20 ft. over a NW. slope.
- 37.50 Fence, bears NE. and SW., end of fence from W.; asc. 30 ft. over a NW. slope.
- 39.99 Point for the standard $\frac{1}{4}$ sec. cor. of sec. 32, at proportionate distance; there is no remaining evidence of the original cor.
- Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. in diam., 24 ins. in the ground, with brass cap mkd.
- SC
T1N R7E
 $\frac{1}{4}$ S32
1965
- from which
- An aspen 8 ins. in diam., bears N. 03° E., 78 lks. dist., mkd. T1N R7E $\frac{1}{4}$ S32 BT.
- Asc. 115 ft. over a NW. slope.
- 47.10 Spur, projects N.; desc. 125 ft. over a NE. slope.
- 48.50 Draw, drains NW.; asc. 340 ft. over a NW. slope.
- 58.55 The closing cor. of secs. 4 and 5, T. 1 S., R. 7 E., hereinafter described.
- Asc. 155 ft. over a NW. slope.
- 67.00 Top of asc.; desc. 60 ft. over a NE. slope.
- 77.00 Bottom of hollow, drains NW.; asc. 55 ft. along a N. slope.

Dependent Resurvey of a Portion of the ~~W~~ Bdy. of T. 1 S., R. 7 E.

CHAINS

79.98

The standard cor. of secs. 32 and 33, monumented with a granite rock 14x10x6 ins. firmly set in the ground, and mkd. with 4 notches on the E. and 2 notches on the west edges, and SC on the N. face.

from which the original bearing trees in good condition

A pine, 13 ins. in diam., bears N. 17° E., 19 lks. dist., mkd. S33 T1N R7E BT.

A pine, 17 ins. in diam., bears N. 81°15' W., 34 lks. dist., mkd. S32 T1N R7E BT.

At the cor. point

Set an iron post, 30 ins. long, 20 ins. in the ground, to solid rock and in a mound of stone, 2½ ft. base, to top, with brass cap mkd.

SC
T1N R7E

S32|S33

1965

Deposit the original cor. alongside the iron post.

Land, mountainous.

Soil, rocky mountain loam.

Timber, medium dense aspen, pine and fir.

Undergrowth, scattered service berry, sagebrush and medium dense grass.

Dependent Resurvey of the West Boundary of T. 1 S., R. 7 E.

Reestablishment of the Survey Executed
by Baxter and Blossom in 1899

From the cor. of T. 1 S., Rs. 6 and 7 E., monumented with an iron post, 2 ins. in diam., conforming to the record.

N. 0°02' E., bet. secs. 31 and 36.

Over mountainous land; asc. 1300 ft. over a rocky S. slope, through dense aspen timber.

40.09

The ½ sec. cor. of secs. 31 and 36, monumented with a Quartzite stone, 20x12x8 ins. firmly set in the ground, and mkd. ½ on the W. face.

No trace of the original bearing trees was found.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 12 ins. in the ground, to solid rock and in a mound of stone, 4 ft. base, to top, with brass cap mkd.

Dependent Resurvey of the West Boundary of T. 1 S., R. 7 E.
CHAINS

T1S
R6E R7E
½
S36|S31

1965

Deposit the original cor. in the mound alongside the iron post.

No suitable trees within limits.

The above cor. is set in a rock slide, sloping S.

N. 0°04' W., beginning new measurement.

Over steep mountainous land; asc. 255 ft. over a rock slide sloping S.

- 2.60 Leave rock slide, enter dense aspen timber; asc. 200 ft. over a S. slope.
- 12.40 Ridge, bears E. and W.; desc. 485 ft. over a NE. slope, through scattered pine timber.
- 28.80 Slope changes to the N., timber becomes dense; desc. 85 ft.
- 40.19 The cor. of secs. 25, 30, 31 and 36, monumented with a sandstone, 16x10x5 ins. firmly set in the ground, and mkd. with 1 notch on the S., and 5 notches on the N. edges.

The original bearing trees are all dead and fallen.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 20 ins. in the ground, and in a mound of stone, 3½ ft. base, to top, with brass cap mkd.

T1S
R6E R7E
S25|S30
S36|S31

1965

from which

A pine, 4 ins. in diam., bears N. 72°30' E., 32 lks. dist., mkd. T1S R7E S30 BT.

A pine, 9 ins. in diam., bears S. 60°30' W., 28 lks. dist., mkd. T1S R6E S36 BT.

Land, mountainous.

Soil, rocky clay.

Timber, dense to scattered aspen the first ½ mile, dense to scattered pine and fir the balance.

Undergrowth, scattered choke cherry, service berry and grass.

Dependent Resurvey of the West Boundary of T. 1 S., R. 7 E.

CHAINS

N. 0°02' E., bet. secs. 25 and 30.

Over mountainous land; desc. 70 ft. over a NE. slope, through medium dense pine and fir timber.

11.40 Stream, 2 lks. wide, 3 ins. deep, flows N. 30° W.; desc. 40 ft. over a NW. slope.

20.10 Point for the S. 1/16 sec. cor. of secs. 25 and 30, at proportionate dist.

Set an iron post, 30 ins. long, 2½ ins. in diam., 18 ins. in the ground, to solid rock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

S
1
16
S25|S30
1965

from which

A pine, 20 ins. in diam., bears S. 26° E., 16 lks. dist., mkd. S1/16 S30 BT.

A pine, 12 ins. in diam., bears S. 47° W., 21 lks. dist., mkd. S1/16 S25 BT.

Desc. 115 ft. over a NW. slope.

33.80 Gulch, with stream in bottom, 5 lks. wide, 4 ins. deep, flows NW.; asc. 130 ft. over a SW. slope, through dense aspen timber.

40.20 The ¼ sec. cor. of secs. 25 and 30, monumented with a sandstone, 14x10x6 ins. firmly set in the ground, and mkd. ¼ on the W. face.

from which the original bearing trees, in good condition

An aspen, 5 ins. in diam., bears N. 87° E., 8 lks. dist., mkd. ¼S30 BT.

A pine, 12 ins. in diam., bears S. 85° W., 5 lks. dist., mkd. ¼S25 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

T1S
R6E R7E
¼
S25|S30
1965

Deposit the original cor. alongside the iron post.

Dependent Resurvey of the West Boundar of T. 1 S. R. 7 E.

CHAINS

N. $0^{\circ}15'$ W., beginning new measurement.

Over mountainous land; asc. 110 ft. over a SW. slope, through dense aspen timber and scattered pine.

- 8.00 Spur, projects W., desc. 300 ft. over a NW. slope.
- 34.20 Ravine, drains W.; asc. 105 ft. over a SW. slope.
- 40.00 The cor. of secs. 19, 24, 25 and 30, monumented with a sandstone, 14x10x6 ins. firmly set in the ground, and mkd. with 2 notches on the S. and 4 notches on the N. edges.

No trace of the original bearing trees was found.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 8 ins. in the ground, to solid rock, and in a mound of stone, $3\frac{1}{2}$ ft. base, to top, with brass cap mkd.

T1S

R6E R7E

S24 | S19

S25 | S30

1965

from which

An aspen 8 ins. in diam., bears, N. 48° E., 11 lks. dist., mkd. T1S R7E S19 BT.

An aspen 6 ins. in diam., bears, S. $64^{\circ}15'$ E., 20 lks. dist., mkd. T1S R7E S30 BT.

An aspen 6 ins. in diam., bears, S. 16° W., 1 lk. dist., mkd. T1S R6E S25 BT.

An aspen 5 ins. in diam., bears, N. $54^{\circ}45'$ W., 70 lks. dist., mkd. T1S R6E S24 BT.

Deposit the original cor. alongside the iron post.

Land, mountainous:

Soil, rocky mountain loam.

Timber, dense aspen, scattered pine and fir.

Undergrowth, scattered choke cherry, service berry and grass.

N. $0^{\circ}13'$ W., bet. secs. 19 and 24.

Over mountainous land; asc. 35 ft. over a SW. slope, through dense aspen and scattered pine timber.

- 4.10 Spur, projects W.; desc. 400 ft. over a NW. slope.
- 30.50 Small ravine, drains W.; asc. 55 ft. over a SW. slope.

Dependent Resurvey of the West Boundary of T. 1 S., R. 7 E.

CHAINS

- 37.20 Spur, projects W.; desc. 65 ft. over a NW. slope.
- 39.82 The $\frac{1}{4}$ sec. cor. of secs. 19 and 24, monumented with a sandstone, 16x10x4 ins. firmly set in the ground, and mkd. $\frac{1}{4}$ on the W. face.
- No trace of the original bearing trees was found.
- At the cor. point
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 8 ins. in the ground, to solid rock, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.
- T1S
- R6E R7E
- $\frac{1}{4}$
- S24|S19
- 1965
- from which
- An aspen 5 ins. in diam., bears N. 86° E., 23 lks. dist., mkd. T1S R7E $\frac{1}{4}$ S19 BT.
- An aspen 4 ins. in diam., bears S. 53° W., 21 lks. dist., mkd. T1S R6E $\frac{1}{4}$ S24 BT.
- Deposit the original cor. in the mound alongside the iron post.
-
- N. $0^{\circ}06'$ W., beginning new measurement.
- Over mountainous land, through dense aspen timber; desc. 270 ft. over a NW. slope.
- 10.90 Enter rock slide, sloping NW., timber becomes scattered; desc. 130 ft.
- 35.70 Leave rock slide, timber becomes dense; desc. 55 ft. over a NW. slope.
- 39.68 The cor. of secs. 13, 18, 19 and 24, monumented with a sandstone, 16x8x5 ins. firmly set in the ground, and mkd. with 3 groves on the N. and S. faces.
- No trace of the original bearing trees was found.

Dependent Reserve of the West Boundary of T. 1 S., R. 7 E.

CHAINS

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. in diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

T1S

R6E R7E

S13 | S18
S24 | S19

1965

from which

An aspen 10 ins. in diam., bears N. 45° E., 25 lks. dist., mkd. T1S R7E 1/4 S18 BT.

An aspen 5 ins. in diam., bears S. 62°30' W., 8 lks. dist., mkd. T1S R6E 1/4 S24 BT.

An aspen, 5 ins. diam., bears N. 25°45' W., 11 lks. dist., mkd. T1S R6E S13 BT.

Deposit the original cor. in the mound alongside the iron post.

Land, mountainous.
Soil, rocky clay.
Timber, dense aspen, scattered to dense pine and fir.
Undergrowth, scattered service berry, choke cherry and grass.

Reestablishment of the Survey Executed by A. Jessen in 1893, and Retraced by Baxter and Blossom in 1899

From the cor. of secs. 13, 18, 19 and 24, previously described.

N. 0°31' W., bet. secs. 13 and 18.

Over mountainous land, through medium dense timber; desc. 250 ft. over a NW. slope.

23.20 Gulch, drains NW.; asc. 100 ft. over a S. slope.

Dependent Resurvey of the West Boundary of T. 1 S., R. 7 E.

CHAINS

26.10 Spur, projects W.; desc. 300 ft. over a N. slope, by triangulation.

39.78 Point for the $\frac{1}{2}$ sec. cor. of sec. 13, T. 1 S., R. 6 E., at midpoint bet. the cor. of secs. 13, 18, 19 and 24 and the closing cor. of secs. 12 and 13; end of triangulation.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.

T1S
R6E |
 $\frac{1}{2}$ S13 |
1965

from which

An aspen 5 ins. in diam., bears S. 70° W., 26 lks. dist., mkd. T1S R6E $\frac{1}{2}$ S13BT.

40.40 The $\frac{1}{2}$ sec. cor. of sec. 18, monumented with a sandstone, 12x10x4 ins. firmly set in the ground, and mkd. $\frac{1}{2}$ on the W., face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 18 ins. in the ground, to solid rock, and in a collar of stone, with brass cap mkd.

T1S
R7E |
 $\frac{1}{2}$ S18 |
1965

from which

An aspen 6 ins. in diam., bears S. 60° E., 30 lks. dist., mkd. T1S R7E $\frac{1}{2}$ S18 BT.

Deposit the original cor. alongside the iron post.

N. $0^\circ 08'$ W., beginning new measurement.

Over mountainous land, through dense timber, by triangulation; desc. 150 ft. over a N. slope.

Dependent Resurvey of the West Boundary of T. 1 S., R. 7 E.

CHAINS

- 8.40 A stream in bottom of canyon, 4 lks. wide, 6 ins. deep, flows W.; asc. 600 ft. over a S. slope, covered with medium dense oak and mahogany.
- 28.00 Ridge, bears S. 85° W., and N. 85° E.; desc. 230 ft. over a NW. slope, through dense aspen.
- 38.37 The cor. of secs. 7 and 18, monumented with a sandstone, 20x12x6 ins. firmly set in the ground, and mkd. with 4 notches on the S. and 2 notches on the N. edges.

No trace of the original bearing trees was found.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.

T1S
R7E
S7
S18

1965

from which

An aspen, 5 ins. in diam., bears, N. 52°15' E., 19 lks. dist., mkd. T1S R7E S7 BT.

A pine, 14 ins. in diam., bears, S. 43° E., 36 lks. dist., mkd. T1S R7E S18 BT.

Deposit the original cor. alongside the iron post.

Land, mountainous.

Soil, rocky clay.

Timber, dense, aspen, with patches of dense pine and fir. Undergrowth, scattered sagebrush, service berry, mahogan and oak.

N. 0°08' W., along the W. bdy. of sec. 7.

Over mountainous land, through dense aspen timber.

- .79 The closing cor. of secs. 12 and 13, T. 1 S., R. 6 E., monumented with a sandstone, 32x10x8 ins., firmly set in the ground, and mkd. with 4 groves on the S. 2 groves on the N. and CC on the W. face.

No trace of the original bearing trees was found.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. in diam., 18 ins. in the ground, and in a mound of stone, 3½ ft. base, to top, with brass cap mkd.

T1S
R6E
S12
S13

1965

Dependent Resurvey of the West Boundary of T. 1 S., R. 7 E.

CHAINS

from which

A white pine, 12 ins. in diam., bears S45°15' W., 20 lks. dist., mkd. T1S R6E S13 BT.

A aspen, 4 ins. in diam., bears N. 35° W., 16 lks. dist., mkd. T1S R6E S12 BT.

Deposit the original cor. in the mound alongside the iron post.

Desc. 280 ft. over a N. slope, through dense aspen and pine, timber.

10.50 Bottom of small ravine, drains N. 60° W.; asc. 90 ft. over a SW. slope.

15.60 Top of rise, slopes W.; desc. 150 ft. over a N. slope.

20.90 Leave timber, enter dense undergrowth; desc. 130 ft. over a N. slope.

28.00 Leave undergrowth, enter dense aspen, fir and pine timber; desc. 360 ft. over N. slope.

39.05 The $\frac{1}{4}$ sec. cor. of sec. 7, monumented with a sandstone, 16x8x4 ins., firmly set in the ground, and mkd. $\frac{1}{4}$ on the W. face.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. in diam., 16 ins. in the ground, to solid rock, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.

T1S
R7E
 $\frac{1}{4}$ S7

1965

from which

A white pine, 8 ins. in diam., bears, S. 53°45' E., 43 lks. dist., mkd. T1S R7E $\frac{1}{4}$ S7 BT.

Deposit the original cor. in the mound alongside the iron post.

The above cor. is set at the cor. of fences bearing N. and E.

N. 0°25' W., beginning new measurement.

Over mountainous land, through scattered timber; desc. 20 ft. over a N. slope, along fence line.

1.88 Point for the $\frac{1}{4}$ sec. cor. of sec. 12, T. 1 S., R. 6 E., at midpoint bet. closing cors.

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. in diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.

Dependent Resurvey of the West Boundary of T. 1 S., R. 7 E.

CHAINS

T1S
R6E
½S12

1965

- Desc. 20 ft. over a N. slope.
- 5.30 South fork of the Weber River, 40 lks. wide, 2 ft. deep, flows W.
- 6.32 Cor. of fence, bears S. and E.
- 6.50 Dirt road, bears E. and W.; asc. 510 ft. over a S. slope through dense oak and mahogany.
- 19.40 Spur, projects W.; desc. 206 ft. over a NW. slope.
- 31.40 Draw, drains SW.; asc. 277 ft. over a ledgy SW. slope.
- 40.02 The cor. of secs. 6 and 7, monumented with a 16x12x6 ins firmly set in the ground, and mkd. with 5 notches on the S. and 1 notch on the N. edges.

At the cor. point

Set an iron post, 30 ins. long; 2½ ins. in diam., 6 ins. in the ground, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.

T1S
R7E
S6
S7

1965

Deposit the original cor. in the mound alongside the iron post.

Land, mountainous.
Soil, rocky clay.
Timber, medium dense aspen and pine.
Undergrowth, scattered service berry, and grass the first ½ mile, medium dense oak and mahogany the balance.

N. 0°20' W., along the W. bdy. of sec. 6.

Over mountainous land, through patches of dense timber and medium dense undergrowth; asc. 10 ft. over a SW slope.

- .40 Spur, projects S. 80° W.; desc. 30 ft. over a NW. slope, through dense undergrowth.
- 2.00 The closing cor. of secs. 1 and 12, T. 1 S., R. 6 E., monumented with a sandstone, 20x14x4 ins. firmly set in the ground, and mkd. with 5 groves on the S. 1 grove on the N. and CC on the W. faces, and witnessed by a mound of stone 2½ ft. base 2 ft. high, W. of the cor.

At the cor. point

Dependent Resurvey of the West Boundary of T. 1 S., R. 7 E.

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins. in the ground, with brass cap mkd.

T1S

R6E

CC $\frac{S1}{S12}$

1965

from which

An aspen, 4 ins. in diam., bears, S. $08^{\circ}45'$ W., 39 lks. dist., mkd. T1S R6E S12 CC BT.

Raise a mound of stone, 3 ft. base 2 ft. high W. of the cor.

Deposit the original cor. in the mound alongside the iron post.

Thence by triangulation; desc. 585 ft. over a NW. slope, through dense timber.

28.80 Left bank of the Weber River; 4 ft. deep, flows SW.; end of triangulation.

29.70 Right bank of river; thence over meadow land.

39.73 The $\frac{1}{4}$ sec. cor. of sec. 6, monumented with a granitestone, 14x14x8 ins. firmly set in the ground, and mkd. $\frac{1}{4}$ on the W. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.

T1S

R7E

 $\frac{1}{4}$ S6

1965

Deposit the original cor. alongside the iron post.

N. $0^{\circ}17'$ W., beginning new measurement.

Over nearly level meadow land.

1.99 Power line, bears S. $36^{\circ}30'$ W., and N. $36^{\circ}30'$ E.

2.02 Point for the $\frac{1}{4}$ sec. cor. of sec. 1, T. 1 S., R. 6 E., at proportionate distance.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 20 ins. in the ground, and in a collar of stone, to top, with brass cap mkd.

T1S

R6E

 $\frac{1}{4}$ S1

1965

Dependent Reserve of the West Boundary of T. 1 S R 7 E

CHAINS

- 2.49 Center of highway 213, bears S. $36^{\circ}30'$ W., and N. $36^{\circ}30'$ E.; asc. 415 ft. over a SE. slope through medium dense undergrowth.
- 19.90 Point for the N. 1/16 sec. cor. of sec. 6, T. 1 S., R. 7 E., at proportionate distance.
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 20 ins. in the ground, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.
- N
 $\frac{1}{16}$
 S6
- 1965.
- Asc. 163 ft. over a SE. slope.
- 24.90 Spur, projects E.; desc. 75 ft. over a NE. slope.
- 27.70 Draw, drains E.; asc. 80 ft. over a S. slope.
- 30.40 Spur, projects E.; desc. 50 ft. over a N. slope.
- 32.59 Draw, drains E.; asc. 55 ft. over a S. slope.
- 36.30 Spur, projects E.; desc. 60 ft. over a NE. slope.
- 39.17 The original closing cor. of secs. 1 and 6, T. 1 S., Rs. 6 and 7 E., monumented with a sandstone, 16x12x5 ins. above ground, and mkd. with CC on the S. face, 6 grooves on the E. and W. faces.
- Destroy the original markings and remark the stone with "AM".
- 39.49 Intersect the N. bdy. of the T.
- Point for the closing cor. of secs. 1 and 6, T. 1 S., Rs. 6 and 7 E.
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 22 ins. in the ground, with brass cap mkd.

S1|S6
 CC
 T1S
 R6E R7E

1965

from which

An aspen 6 ins. in diam., bears S. $36^{\circ}30'$ E., 42 lks. dist., mkd. T1S R7E S6 CC BT.

An aspen 6 ins. in diam., bears S. $23^{\circ}15'$ W., 20 lks. dist., mkd. T1S R6E S1 CC BT.

From this cor., the standard cor. of secs. 31 and 36, T. 1 N., Rs. 6 and 7 E., hereinbefore described bears S. $89^{\circ}23'$ E., 18.29 chs. dist.

Dependent Resurvey of the West boundary of T. 1 S., R. 7 E.

CHAINS

Land, mountainous.
Soil, rocky clay.
Timber, patches of dense aspen, pine and fir.
Undergrowth, scattered to dense patches of mahogany,
service berry, oak and grass.

Dependent Resurvey of a Portion of the Subdivision of
T. 1 S., R. 7 E.

Reestablishment of the Survey Executed by Adophe Jessen
in 1893.

The cor. of secs. 16, 17, 20 and 21, monumented with a
sandstone 16x12x6 ins. firmly set in the ground, and mkd.
with 4 notches on the S. and E. edges.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 22 ins.
in the ground, with brass cap mkd:

T1S R7E

S17	S16
S20	S21

1965

Raise a mound of stone, 3 ft. base, 2 ft. high, W.
of the cor.

Deposit the original cor. alongside the iron post.

N. $1^{\circ}07'$ W., bet. secs. 16 and 17.

Over mountainous land, through dense undergrowth; asc.
20 ft. over a SE. slope.

- 1.70 Top of rise, slopes E.; desc. 375 ft. over a NE. slope,
through dense timber.
- 25.20 Beaver pond, 80 lks. wide, drains irregularly N.; desc.
100 ft. over a N. slope, through dense timber.
- 36.00 South fork of the Weber River, 30 lks. wide, 1 ft. deep,
flows NW.; thence across nearly level bottom land.
- 36.45 The site of John Maxwell's cabin, has been burned.
- 37.00 Leave canyon bottom land; asc. 100 ft. over a S. slope.
- 40.45 Point for the $\frac{1}{2}$ sec. cor. of secs. 16 and 17, reestablished
from ties, given in the original notes to John Maxwell's
cabin and sawmill.
- from which the remains of John Maxwell's cabin and
sawmill:

Dependent Reserve of a Portion of Subdivision of T. 1 S R
CHAINS

The remains of John Maxwell's cabin, bears S. 4.00 chs. dist.

The remains of John Maxwell's sawmill, bears S. 48°40' W., 3.00 chs. dist.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 12 ins. in the ground, to solid rock, and in a mound of stone, 3½ ft. base, to top, with brass cap mkd.

T1S R7E

½

S17|S16

1965

N. 0° 53' E., beginning new measurement.

Over mountainous land, through dense undergrowth; asc. 570 ft. over a SW. slope.

- 17.20 Spur, projects W.; desc. 100 ft. over a NW. slope, enter dense timber.
- 22.50 Draw, drains W.; asc. 80 ft. over a S. slope.
- 27.30 Spur, projects S. 45° W.; desc. 50 ft. over a NW. slope.
- 32.80 Ravine, drains W.; asc. 140 ft. along a SW. slope.
- 35.61 The closing cor. of secs. 9 and 16, monumented with a sandstone, 16x11x5 ins. firmly set in the ground, and mkd with CC and 4 groves on the E. and 4 groves on the S. faces.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 18 ins. in the ground, with a collar of stone, to top, with brass cap mkd.

T1S R7E

|S9 CC
|S16

1965

from which

Anaspn 5 ins. in diam., bears N. 68° E., 37 lks. dist., mkd. T1S R7E S9 CC BT.

Deposit the original cor. alongside the iron post.

Thence along the E. bdy. of sec. 17.

- 38.98 The cor. of secs. 8 and 17, monumented with a sandstone, 13x7x4 ins., firmly set in the ground, and mkd. with 4 notches on the S. and E. edges, witnessed by a small mound of stone, W.

At the cor. point

Dependent Resurvey of a Portion of the Subdivision of T. 1 S., R. 7 E.

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 20 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T1S R7E

$\frac{S8}{S17}$ | S9

1965

from which .

An aspen, 4 ins. in diam., bears S. $64^{\circ}15'$ W., 31 lks. dist., mkd. T1S R7E S17 BT.

An aspen, 5 ins. in diam., bears N. $25^{\circ}45'$ W., 17 lks dist., mkd. T1S R7E S8 BT.

Deposit the original cor. alongside the iron post.

Land, mountainous.

Soil, rocky, clay loam.

Timber, dense aspen, scattered pine and fir.

Undergrowth, dense oak, service berry and mahogany the first 17.00 chs. scattered the balance.

N. $0^{\circ}56'$ E., along the E. bdy. of sec. 8.

Over mountainous land, through dense aspen timber; asc. 20 ft. over a SW. slope.

2.00 Spur, projects W.; desc. 75 ft. over a NW. slope.

5.50 Draw, drains NW.; asc. 135 ft. along a SW. slope.

18.60 Spur, projects NW.; desc. 75 ft. over a NW. slope.

35.49 Point for the $\frac{1}{2}$ sec. cor. of sec. 9, at midpoint between closing cors.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 18 ins. in the ground, to solid rock, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.

T1S R7E

$\frac{1}{2}$ | S9

1965

38.97 Point for the $\frac{1}{2}$ sec. cor. of sec. 8, at proportionate dist., there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins. in the ground with brass cap mkd.

T1S R7E

$\frac{1}{2}$ | S8

1965

Dependent Resurvey of a Portion of the Subdivision of T. 1 S., R. 7 E

CHAINS

Raise a mound of stone, 3 ft. base, $2\frac{1}{2}$ ft. high,
W. of the cor.

Desc. 100 ft. along a W. slope.

52.00 Draw, drains W., leave timber, enter medium dense oak
brush; asc. 500 ft. over a S. slope.

74.35 The closing cor. of secs. 4 and 9, monumented with a
sandstone, 14x8x6 ins., firmly set in the ground, and
mkd. with CC and 4 groves on the E. and 5 groves on the
S. faces, and witnessed by a small mound of stone E.

At the corner point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 12 ins.
in the ground, to solid rock, and in a mound of stone,
3 ft. base to top, with brass cap mkd.

T1S R7E

S8 | $\frac{S4}{S9}$ | CC

1965

Deposit the original cor. alongside the iron post.

Asc. 150 ft. over a S. slope.

77.95 The cor. of secs. 5 and 8, monumented with a sandstone,
18x8x4 ins., firmly set in the ground, and mkd. with 5
notches on the S. and 4 notches on the E. faces.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins.
in the ground, and in a collar of stone, with brass cap
mkd.

T1S R7E

$\frac{S5}{S8}$ | S4

1965

Deposit the original cor. alongside the iron post.

Land, mountainous.

Soil, rocky, clay loam.

Timber, patches of dense aspen and pine.

Undergrowth, medium dense oak, service berry, choke
cherry and grass.

N. $0^{\circ}04'$ W., along the E. bdy. of sec. 5.

Over mountainous land, through dense undergrowth; asc.
190 ft. over a S. slope.

7.10 Spur, projects W.; desc. 245 ft. over a N. slope, through
dense timber.

Dependent Resurvey of a Portion of the Subdivision of T. 1 S., R. 7 E.

CHAINS

- 20.50 Small ravine drains N. 30° W., desc. 290 ft. over a N. slope.
- 35.87 Point for the $\frac{1}{4}$ sec. cor. of sec. 4, at proportionate distance.
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.
- T1S R7E
|
 $\frac{1}{4}$
|
S4
1965
- Desc. 65 ft. over a N. slope.
- 39.44 Point for the $\frac{1}{4}$ sec. cor. of sec. 5, at proportionate dist., there is no remaining evidence of the original cor.
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.
- T1S R7E
|
 $\frac{1}{4}$
|
S5
1965
- Desc. 140 ft. over a N. slope, through dense timber.
- 43.20 Bottom of canyon, creek 8 lks. wide, 8 ins. deep, flows W.; leave timber, enter medium undergrowth; asc. 410 ft. over a S. slope.
- 70.80 Ridge, jeep road along top, bears irregularly E. and W.; desc. 237 ft. over a N. slope, through dense timber.
- 77.74 Intersect the N. bdy. of the township, at the closing cor. of secs. 4 and 5, monumented with a sandstone, 16x14x8 ins. firmly set in the ground, and mkd. CC and 4 groves on the E. and 2 groves on the W. faces.
- At the corner point
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 22 ins. in the ground, with brass cap mkd.
- S5|S4
CC
T1S R7E
1965
- from which
- A pine, 8 ins. in diam., bears S. 85°45' E. 33 lks. dist., mkd. T1S R7E S4 CC BT.
- A pine, 5 ins. in diam., bears S. 33° W., 39 lks. dist., mkd. T1S R7E S5 CC BT.
- From this cor., the standard cor. of secs. 32 and 33, T. 1 N., R. 7 E., bears N. 89°08' E., 21.43 chs. dist.

Dependent Resurvey of a Portion of the Subdivision of T. 1 S R 7

Land, mountainous.
 Soil, rocky, clay loam.
 Timber, patches of dense pine and aspen.
 Undergrowth, patches of dense oak, scattered mahogany,
 service berry and grass.

From the cor. of secs. 16, 17, 20 and 21.

S. 88°46' W., bet. secs. 17 and 20.

Over mountainous land, through dense undergrowth; asc.
 242 ft. over an E. slope.

5.80 Spur, projects NE.; desc. 20 ft. along a N. slope, enter
 dense timber.

17.20 Ravine, drains NE.; asc. 455 ft. over a E. slope.

17.40 Leave timber, enter rock slide; asc. 100 ft. over a E.
 slope.

32.40 Leave rock slide, enter scattered timber; asc. 240 ft.
 over a E. slope.

39.05 Point for the $\frac{1}{2}$ sec. cor. of secs. 17 and 20, at pro-
 portionate dist., there is no remaining evidence of the
 original cor.

Set an iron post, 30 ins. long, 2½ ins. in diam., 10 ins
 in the ground, and in a mound of stone, 4½ ft. base, to
 top, with brass cap mkd.

T1S R7E

§ 17
 § 20

1965

Asc. 245 ft. over a SE. slope.

55.70 Spur, projects N. 45° E.; thence by triangulation; desc.
 300 ft. over a W. slope, through medium dense pine
 timber.

66.60 Deep draw, drains N.; asc. 250 ft. over rock slides,
 sloping E. through scattered timber.

77.20 Spur, projects N. 30° E.; thence along a N. slope.

78.16 The cor. of secs. 17, 18, 19 and 20, monumented with a
 sandstone, 14x11x6 ins. firmly set in the ground, and
 mkd. with 1 notches on the S. and 5 notches on the E.
 edges, and witnessed by a small mound of stone W.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 6 ins.
 in the ground, to solid rock, and in a mound of stone,
 4½ ft. base, to top, with brass cap mkd.

T1S R7E

§ 18 § 17
 § 19 § 20

1965

Dependent Resurvey of a Portion of the Subdivision of T. 1 S., R. 7 E.

CHAINS

Deposit the original cor. in the mound alongside the iron post.

Land, mountainous.

Soil, rocky clay, with a considerable amount of exposed sandstone.

Timber, dense to scattered pine and aspen.

Undergrowth, patches of dense service berry, oak, grass and weeds.

S. 88°31' W., bet. secs. 18 and 19.

Over mountainous land, through dense timber; desc. 775 ft. over a NW. slope.

36.40 Ravine, drains N. 45° W.; asc. 50 ft. over a SE. slope.

37.70 Spur, projects N.; desc. 35 ft. over a NW. slope.

39.81 Point for the $\frac{1}{4}$ sec. cor. of secs. 18 and 19, at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. in diam., 6 ins. in the ground, to solid rock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T1S R7E

$\frac{1}{4}$ $\frac{S18}{S19}$

1965

Asc. 30 ft. over a NE. slope.

44.00 Spur, projects N.; desc. 40 ft. along a N. slope.

51.90 Small ravine, drains N. 30° W.; asc. 20 ft. over a NE. slope.

57.10 Spur, projects N. 10° W.; desc. 315 ft. over a NW. slope.

76.88 The cor. of secs. 13, 18, 19 and 24, on the W. bdy. of the T.; hereinbefore described.

Land, mountainous.

Soil, rocky, clay, with a considerable amount of broken and exposed sandstone.

Timber, scattered to dense pine and aspen.

Undergrowth, medium dense service berry, oak, choke cherry and grass.

From the cor. of secs. 17, 18, 19 and 20.

N. 1°25' W., bet. secs. 17 and 18.

Over mountainous land, through medium dense timber; desc. 809 ft. over a N. slope.

30.30 Draw, drains N. 80° E.; asc. 75 ft. over a SE. slope.

37.70 Spur, projects SE.

Dependent Resurvey of a Portion of the Subdivision of T. 1 S. R. 7 E

CHAINS

37.90 Point for the $\frac{1}{2}$ sec. cor. of secs. 17 and 18, at proportionate dist., there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in dia., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.

T1S R7E

$\frac{1}{2}$

S18|S17

1965

from which

An aspen 7 ins. in diam., bears N. $78^{\circ}45'$ E., 38 lks. dist., mkd. T1S R7E $\frac{1}{2}$ S17 BT.

An aspen 7 ins. in diam., bears N. $52^{\circ}30'$ W., 45 lks. dist., mkd. T1S R7E $\frac{1}{2}$ S18 BT.

Desc. 195 ft. over a NE. slope.

- 41.00 Ravine, drains N. 45° E.; asc. 170 ft. over a SE. slope.
- 47.80 Spur, projects NE.; desc. 40 ft. over a NE. slope.
- 52.00 Small ravine drains E.; asc. 150 ft. over a SE. slope.
- 63.20 Spur, projects N. 15° E.; desc. 250 ft. over a N. slope.
- 75.80 Point for the cor. of secs. 7, 8, 17 and 18, at proportionate dist., there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 15 ins. in the ground, to solid rock, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.

T1S R7E

S7|S8

S18|S17

1965

from which

A pine, 10 ins. in diam., bears N. $55^{\circ}30'$ E., 97 lks. dist., mkd. T1S R7E S8 BT.

An aspen, 4 ins. in diam., bears S. $75^{\circ}30'$ W., 45 lks. dist., mkd. T1S R7E S18 BT.

A pine, 6 ins. in diam., bears N. $65^{\circ}15'$ W., 34 lks. dist., mkd. T1S R7E S7 BT.

Land, mountainous.

Soil, rocky clay loam.

Timber, patches of dense aspen and pine.

Undergrowth, patches of dense oak, service berry, choke cherry and grass.

From the cor. of secs. 8 and 17.

Dependent Resurvey of a Portion of the Subdivision of T. 1 S., R. 7 E.

CHAINS

S. 87°32' W., bet. secs. 8 and 17.

Over mountainous land, through dense aspen timber, desc. 560 ft. over a W. slope.

15.50 Gulch, drains S. 70° W.; desc. 295 ft. over a SW. slope.

27.60 Jeep road, in canyon bottom, bears irregularly N. and S.

30.04 Right bank of the South Fork of Weber River, 30 lks. wide, 1 ft. deep, flows N. 05° W.

32.70 W. side of canyon bottom; asc. 335 ft. over a NE. slope, through dense pine timber.

40.34 The $\frac{1}{2}$ sec. cor. of secs. 8 and 17, monumented with a sandstone, 14x12x8 ins. firmly set in the ground, and mkd. $\frac{1}{2}$ on the N. face.

from which the original bearing tree

A Balsom 12 ins. in diam., bears N. 10° W., 27 lks. dist., (record 25 lks.), I remark this tree to read T1S R7E $\frac{1}{2}$ S8 BT.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. in diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.

T1S R7E

$\frac{1}{2}$ $\frac{S8}{S17}$

1965

S. 84°34' W., beginning new measurement.

Asc. 220 ft. over a NE. slope, through pine timber.

10.20 Leave pine, enter dense aspen; asc. 25 ft. along a N. slope.

14.00 Spur, projects NW.; desc. 140 ft. over a W. slope.

19.80 Point for the W. 1/16 sec. cor. of secs. 8 and 17, at proportionate dist.

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. in diam., 15 ins. in the ground, to solid rock and in a mound of stone, 3 ft. base, to top, with brass cap mkd.

W1/16 $\frac{S8}{S17}$

1965

from which

An aspen, 8 ins. in diam., bears S. 07° W., 15 lks. dist., mkd. W1/16 S17 BT.

An aspen, 12 ins. in diam., bears N. 37° W., 46 lks. dist., mkd. W1/16 S8 BT.

Dependent Reserve of a Portion of the Su

CHAINS

- Desc. 285 ft. over a W. slope, through medium dense aspen.
- 30.60 Bottom of canyon, stream 1 lk. wide, 1 in. deep, flows N.; asc. 160 ft. over a E. slope, through dense aspen timber.
- 39.60 The cor. of secs. 7, 8, 17 and 18.
- Land, mountainous.
Soil, rocky, clay.
Timber, patches of dense pine, fir and aspen.
Undergrowth, medium dense oak, service berry and choke cherry.
- N. 89°17' W., bet. secs. 7 and 18.
- Over mountainous land; asc. 100 ft. along a N. slope, through medium dense timber.
- 7.00 Draw, drains NE. leave timber, enter dense undergrowth; asc. 1050 ft. over a broken E. slope.
- 33.00 Ridge, bears N. 25° E., and S. 25° W.; desc. 160 ft. over a NW. slope through dense undergrowth.
- 39.29 Point for the $\frac{1}{2}$ sec. cor. of secs. 7 and 18, at proportionate dist.; there is no remaining evidence of the original cor.
- Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. in diam., 25 ins. in the ground, with brass cap mkd.
- T1S R7E
 $\frac{1}{2}$ $\frac{S7}{S18}$
1965
- from which
- A pine, 5 ins. in diam., bears S. 66° E., 12 lks. dist., mkd. T1S R7E $\frac{1}{2}$ S18 BT.
- A pine, 10 ins. in diam., bears N. 11°15' W., 42 lks dist., mkd. T1S R7E $\frac{1}{2}$ S7 BT.
- 39.40 Small swale, drains NW.; asc. 40 ft. over a NE. slope.
- 40.60 Top of rise, slopes N.; desc. 140 ft. over a NW. slope.
- 43.40 Enter dense aspen timber; desc. 75 ft. along a NW. slope.
- 49.42 Leave timber; enter dense undergrowth; desc. 20 ft. along a NW. slope.
- 52.00 Enter dense timber; desc. 310 ft. over a NW. slope.
- 75.32 The cor. of secs. 7 and 18, on the W. bdy. of the T.; hereinbefore described.

Dependent Resurvey of a Portion of the Subdivision of T. 1 S., R. 7 E.

CHAINS

Land, mountainous.

Soil, rocky clay, with a considerable amount of broken and exposed sandstone.

Timber, patches of dense aspen, scattered pine and fir. Undergrowth, patches of dense oak, mahogany and service berry.

From the cor. of secs. 7, 8, 17 and 18.

N. 5°57' E., bet. secs. 7 and 8.

Over mountainous land, through dense aspen timber; desc. 200 ft. over a NE. slope.

- 8.50 Bottom of draw, stream, 4 lks. wide, 2 ins. deep, flows N. 60° E.; asc. 85 ft. over a SE. slope.
- 12.40 Spur, projects E.; desc. 55 ft. over a NE. slope.
- 19.05 Point for the S. 1/16 sec. cor. of secs. 7 and 8, at proportionate dist.
- Set an iron post, 30 ins. long, 2½ ins. in diam., 15 ins. in the ground, to solid rock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.
- S1
—
16
S7½S8

1965
- Desc. 45 ft. over a NE. slope.
- 26.70 Ravine, drains N. 70° E.; asc. 30 ft. over a SE. slope.
- 28.80 Small spur, projects E.; desc. 165 ft. over a NE. slope.
- 38.10 The ¼ sec. cor. of secs. 7 and 8, monumented with a sandstone, 18x14x4 ins., firmly set in the ground, and mkd. ½ on the W. face.
- No trace of the original bearing trees could be found.
- At the cor. point
- Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.
- T1S R7E
½
S7½S8

1965
- from which
- An aspen 6 ins. in diam., bears N. 60°45' E., 26 lks. dist., mkd. T1S R7E ½S8 BT.
- An aspen 5 ins. in diam., bears N. 73°30' W., 19 lks. dist., mkd. T1S R7E ½S7 BT.

Dependent Resurvey of a Portion of the Subdivision of T. 1 S., R. 7 E

CHAINS

Deposit the original cor. alongside the iron post.

N. 3°49' W., beginning new measurement.

Over mountainous land; desc. 105 ft. over a NE. slope, through medium dense timber.

- 8.90 Leave timber; enter canyon bottom.
- 11.27 Barbed wire fence, bears E. and W.
- 12.30 South fork of the Weber River, 40 lks. wide, 2 ft. deep, flows W.
- 13.65 Barbed wire fence, bears E. and W.
- 13.80 Dirt road, bears irregularly E. and W., base of slope; asc. 300 ft. over a S. slope, through medium dense undergrowth.
- 21.71 Point for the N. 1/16 sec. cor. of secs. 7 and 8, at proportionate dist.

Set an iron post, 30 ins. long, 2½ ins. in diam., 15 ins. in the ground, to solid rock, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.

$$\frac{N\ 1}{16}$$

S7|S8

1965

Asc. 350 ft. over a S. slope.

- 32.40 Spur, projects S. 30° W.; desc. 140 ft. over a NW. slope.
- 41.10 Draw, drains W.; asc. 25 ft. over a SW. slope.
- 43.43 The cor. of secs. 5, 6, 7 and 8, monumented with a quartzite, 16x12x4 ins., firmly set in the ground, and mkd. with 5 notches on the S. and E. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 5 ins. in the ground, to solid rock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T1S R7E

$$\frac{S6\ |S5}{S7\ |S8}$$

1965

Deposit the original cor. in the mound alongside the iron post.

Land, mountainous.

Soil, rocky, clay.

Timber, patches of dense aspen, with scattered pine.

Undergrowth, patches of medium dense oak, mahogany and service berry.

Dependent Resurvey of a Portion of the Subdivision of T. 1 S., R. 7 E.

CHAINS

From the cor. of secs. 5 and 8.

S. 88°30' W., bet. secs. 5 and 8.

Over mountainous land, through medium dense undergrowth;
asc. 70 ft. along a S. slope.

6.40 Spur, projects NW.; desc. 290 ft. over a W. slope.

16.60 Leave undergrowth; enter dense aspen timber; desc. 545
ft. over a W. slope.

34.60 Bottom of canyon, jeep road, bears irregularly NE. and
SW.

35.40 Barbed wire fence, bears N. and S.

35.70 Stream, 3 lks. wide, 4 ins. deep, flows S. 15° W.; asc.
50 ft. along a SE. slope.

39.98 Point for the $\frac{1}{2}$ sec. cor. of secs. 5 and 8, at pro-
portionate dist.

From the above point, a limestone, 14x10x8 ins. mkd. $\frac{1}{2}$
lying loose on the ground, bears S. 36°07' E., 4.85 chs.
dist.; this stone was found in an area that the boy
scouts have used as a camp ground and appears to have
been used as a weight on the sod cloth of a tent.

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. in diam., 22 ins.
in the ground, and in a collar of stone, with brass cap
mkd.

T1S R7E

$\frac{1}{2}$ S5
S8

1965

from which

A oak, 4 ins. in diam., bears S. 43° W., 76 lks.
dist., mkd. T1S R7E $\frac{1}{2}$ S8 BT.

An aspen 5 ins. in diam., bears N. 11°45' W., 76 lks.
dist., mkd. T1S R7E $\frac{1}{2}$ S5 BT.

Deposit the found stone, below the surface of the
ground, alongside the iron post.

Asc. 527 ft. over a SE. slope, through medium dense
undergrowth.

59.97 Point for the W. 1/16 sec. cor. of secs. 5 and 8, at pro-
portionate dist.

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. in diam., 18 ins.
in the ground, to solid rock, and in a mound of stone,
3 ft. base, to top, with brass cap mkd.

W1 S5
16 S8

1965

Asc. 65 ft. over a SE. slope.

Dependent Resurvey of a Portion of the Subdivision of T. 1 S. R. 7 E.

CHAINS

- 64.10 Spur, projects S. 60° W.; desc. 225 ft. over a NW. slope, through dense aspen timber.
- 75.00 Gulch, drains SW.; asc. 150 ft. over a SE. slope.
- 79.96 The cor. of secs, 5, 6, 7 and 8.
- Land, mountainous.
Soil, rocky clay.
Timber, patches of dense aspen, scattered pine.
Undergrowth, patches of dense oak, mahogany and service berry.

S. 89°55' W., bet. secs. 6 and 7.

Over mountainous land, through dense undergrowth, along a SW. slope.

- .50 Spur, projects S. 80° W.; desc. 90 ft. over a NW. slope.
- 11.60 Ravine, drains S. 60° W.; asc. 170 ft. over a SE. slope.
- 39.00 Spur, projects S.; desc. 10 ft. over a SW. slope.
- 40.01 The $\frac{1}{2}$ sec. cor. of secs. 6 and 7, monumented with a sandstone, 24x18x4 ins. firmly set in the ground, and mkd. $\frac{1}{2}$ on the N. face.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. in diam., 20 ins. in the ground, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.

T1S R7E

$\frac{1}{2} \frac{S6}{S7}$

1965

Deposit the original cor. alongside the iron post.

S. 88°11' W., beginning new measurement.

Over mountainous land, through dense undergrowth; desc. 40 ft. over a SW. slope.

- 9.00 Ravine, drains S.; barbed wire fence in bottom, bears N. and S.; asc. 90 ft. over a SE. slope.
- 13.40 Spur, projects SW.; desc. 65 ft. over a NW. slope, through dense timber.
- 17.50 Draw, drains N.; asc. 80 ft. over a NE. slope; leave timber.
- 23.40 Spur, projects NW.; desc. 215 ft. over a W. slope, through dense undergrowth.
- 35.20 Ledge, 20 ft. high, slope changes to SW.; desc. 80 ft.

Dependent Resurvey of a Portion of the Subdivision of T. 1 S., R. 7 E.

CHAINS

36.75 The cor. of secs. 6 and 7, on the W. bdy. of the T.

Land, mountainous.

Soil, rocky, clay, with a considerable amount of exposed sandstone.

Timber, patches of dense pine and aspen.

Undergrowth, patches of dense mahogany, oak, scattered sagebrush and service berry.

From the cor. of secs. 5, 6, 7 and 8.

N. 0°42' W.; bet. secs. 5 and 6.

Over mountainous land, through dense undergrowth; asc. 305 ft. over a SW. slope.

15.66 Barbed wire fence, bears E. and W.; asc. 90 ft. over a SW. slope.

19.30 Spur, projects S. 60° W., desc. 265 ft. over a N. changing to NW. slope; leave undergrowth, enter dense timber.

39.36 The $\frac{1}{4}$ sec. cor. of secs. 5 and 6, monumented with a quartzite 16x14x4 ins., firmly set in the ground, and mkd. $\frac{1}{2}$ on the W. face.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. in diam., 5 ins. in the ground, to solid rock, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.

T1S R7E

$\frac{1}{2}$
S6|S5

1965

N. 0°08' W., beginning new measurement.

Over mountainous land, through medium dense timber; desc. 360 ft. over a NW. slope.

19.60 Point for the N. 1/16 sec. cor. of secs. 5 and 6, at proportionate dist.

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. in diam., 20 ins. in the ground, and in a mound of stone, 2 $\frac{1}{2}$ ft. base to top, with brass cap mkd.

N $\frac{1}{16}$

S6|S5

1965

Desc. 175 ft. over a N. slope.

Dependent Resurvey of a Portion of the Subdivision of T. 1 S., R. 7 E.

CHAINS

39.32 Intersect the N. bdy. of the T.

Point for the closing cor. of secs. 5 and 6, T. 1 S.,
R. 7 E.Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins.
in the ground, with brass cap mkd.

S6	S5
C C	
T1S R7E	

1965

from which

An aspen 7 ins. in diam., bears S. $55^{\circ}45'$ E., 62 lks.
dist., mkd. T1S R7E S5 CC BT.An aspen 4 ins. in diam., bears S. $42^{\circ}45'$ W., 30 lks.
dist., mkd. T1S R7E S6 CC BT.From this cor., the standard cor. of secs. 31 and 32,
T. 1 N., R. 7 E., hereinbefore described, bears N. 89°
 $29'$ E., 21.69 chs. dist.39.43 The original closing cor. of secs. 5 and 6, monumented
with a sandstone, 16x14x6 ins., firmly set in the ground,
and mkd., with 5 notches on the E. 1 notch on the W. and
CC on the S. face.Destroy the original markings and remark the stone with
"AM".

Land, mountainous.

Soil, rocky, clay.

Timber, patches of dense aspen, scattered pine and fir.

Undergrowth, patches of dense oak, mahogany and service
berry.Point for the N. $\frac{1}{4}$ sec. cor. of sec. 5, at midpoint bet.
the closing cor. of secs. 4 and 5 and the closing cor. of
secs. 5 and 6.Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins.
in the ground, with brass cap mkd.

$\frac{1}{4}$ —————
S5
T1S R7E

1965

from which

An aspen, 7 ins. in diam., bears S. $30^{\circ}45'$ W., 2 lks.
dist., mkd. T1S R7E $\frac{1}{4}$ S5 BT.

Dependent Resurvey of a Portion of the Subdivision of T. 1 S., R. 7 E.

CHAINS

From the above cor., the standard cor. of secs. 31 and 32, T. 1 N., R. 7 E., bears S. 89°08' W., 18.43 chs. dist. hereinbefore described.

Point for the N. $\frac{1}{2}$ sec. cor. of sec. 6, at proportionate distance, bet. the closing cor. of secs. 5 and 6, and the closing township cor. of secs. 1 and 6.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 20 ins. in the ground, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.

$\frac{1}{2}$ _____
S6
T1S R7E

1965

From the above cor., the standard cor. of secs. 31 and 36, T. 1 N., Rs. 6 and 7 E., bears S. 88°57' W., 18.45 chs. dist.; hereinbefore described.

Point for the E. $\frac{1}{16}$ cor. of sec. 6, at proportionate distance, bet. the closing cor. of secs. 5 and 6, and the closing township cor. of secs. 1 and 6.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins. in the ground, and with a collar of stone, to top, with brass cap mkd.

$\frac{E1}{16}$ S6

1965

From the above cor., the standard $\frac{1}{2}$ sec. cor. of sec. 31, T. 1 N., R. 7 E., bears N. 88°57' E., 1.54 chs. dist., hereinbefore described.

General Description

A considerable variety of land and soil are found in the portion of Township 1 South, Range 7 East, covered by this survey. The general elevation ranges from about 6,900 ft. above sea level, along the Weber River in the NE. cor. of sec. 6, to 10,237 ft. above sea level on Hoyt Peak in sec. 31. The soil, in the meadow land, along the Weber River, is a alluvial silt and loam, while the mountainous land, is mostly a rocky, clay mountain loam. The undergrowth is mostly oak, mahogany, and service berry with some choke cherry and sagebrush. The timber consists of areas of dense aspen, pine, with scattered fir and balsom. The township is accessible from highway 213, which crosses the NW. cor. of sec. 6.

CHAINS

CERTIFICATE OF SURVEY

I, Fred R. Chappell, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 19th day of June, 1964,

I have dependently resurveyed the west boundary, a portion of the south boundary of Township 1 North, Range 7 E. (Salt Lake Base Line), and a portion of the subdivision lines of Township 1 South, Range 7 East,

of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

May 20, 1966 (Date)

Fred R. Chappell (Cadastral Surveyor) SUPERVISORY

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

SUBMITTED FOR APPROVAL Date JUN 6 1967

BUREAU OF LAND MANAGEMENT, Washington, D. C.

The foregoing field notes of the a portion of the south boundary of Township 1 North, Range 7 East (Salt Lake Base Line), the west boundary, and a portion of the subdivision lines of Township 1 South, Range 7 East, Salt Lake Meridian, Utah

executed by Fred R. Chappell

having been critically examined and found correct, are hereby approved.

SEP 7 1967 (Date)

E. E. Livingston (Chief, Division of Engineering)

CERTIFICATE OF TRANSCRIPT

I CERTIFY That the foregoing transcript of the field notes of the above described surveys in T. 1 S., Range 7 E., Salt Lake Meridian, Utah, is a true copy of the original field notes.

(Date)

(Chief, Division of Engineering)