

Volume

#

R0580

(April 1965)
(formerly 4-679)

DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

ORIGINAL

FIELD NOTES

RECEIVED
BUREAU OF LAND MGMT

1968 FEB 7 AM 10 00.0

OF THE DEPENDENT RESURVEY OF THE

EAST BOUNDARY (PANGUITCH GUIDE MERIDIAN)

AND PORTION OF THE SOUTH BOUNDARY

A RETRACEMENT OF

A PORTION OF THE NORTH BOUNDARY

AND SUBDIVISIONAL LINE BETWEEN SECTIONS 11 AND 14

AND

DEPENDENT RESURVEY AND SURVEY OF

A PORTION OF THE SUBDIVISIONAL LINES

COMPLETING THE SUBDIVISION OF

TOWNSHIP 32 SOUTH, RANGE 5 WEST

Of the SALT LAKE Meridian,

In the State of UTAH

EXECUTED BY

CRAIG P. SYLVESTER

SUPERVISORY CADASTRAL SURVEYOR

Under special instructions dated AUGUST 7, 19 64, which provided for the surveys
included under Group Number 478, approved AUGUST 7, 1964,
and assignment instructions dated SEPTEMBER 28, 19 64.

Survey commenced NOVEMBER 11, 19 64

Survey completed MAY 21, 19 65

INDEX DIAGRAM

Township 32 SOUTH Range 5 WEST

13

64	6	52	4	42	8	2	1	12
63	63	43		40			36	
62	8	43	9	40	10	38	11	11
61	60					29		20
59	17	51	16	16	28	14	20	13
58	57			35		27		19
56	20	49	21	34	22	25	23	17
55		48		33		24		17
54	29	47	25	32	27	23	26	15
		45		31		22		15
	32	33	29	34	21	35	14	36
		5		4		3		2

TOWNSHIP 32 SOUTH, RANGE 5 WEST

CHAINS

The east 4 miles of the south boundary were surveyed by T. C. Bailey, in 1874. The west 2 miles of the south boundary were surveyed by Ralph Gentry, in 1920. The south 5 miles of the east boundary, (Panguitch Guide Meridian), were surveyed by J. G. Burrill, in 1874. The north 1 mile of the east boundary and the north boundary were surveyed by Quinby Stewart, in 1911. The west boundary and portion of the subdivisional lines were surveyed, and a portion of the subdivisional lines resurveyed by W. H. Sylvester, in 1960. A portion of the subdivisional lines were surveyed by T. C. Bailey and J. G. Burrill, in 1874.

The following field notes are those of a dependent re-survey of the east 4 miles of the south boundary, the east boundary, and portion of the subdivisional lines; a retracement of the west 1 mile of the north boundary, and subdivisional line bet. secs. 11 and 14, and the survey of the unsurveyed subdivisional lines in T. 32 S., R. 5 W.

The survey was executed in accordance with the specifications as set forth in the Manual of Instructions, 1947, and the Special Instructions dated August 7, 1964.

Corners on the east-west lines were set on the true latitudinal curve. Lines connecting previously established corners were run by random and true method, but for simplification of the record, the random lines are omitted from these field notes.

All lines of this survey were run by direct method where lines were accessible; lines inaccessible were run by traverse or triangulation method. Distances to topography on lines run by traverse and triangulation methods are approximately as scaled from U.S.G.S. topographic sheets. The details of such traverses and triangulations have been thoroughly checked and verified, and in order to simplify the records, the diagrams and reductions are omitted from these field notes.

Before restoring lost corners, the lines of the original survey were retraced, and a diligent search made for any evidence of the original corners. The rules of proportionate measurement were applied to ascertain the position of the lost corner after every reasonable possibility of finding direct evidence of the corner had been exhausted.

The direction of the lines of this survey were determined by reference to true meridians established on line by hour angle observations on Polaris or altitude observations on the sun. The lines were carried forward by sustained angulation being supplemented by other numerous altitude observations on the sun taken throughout the progress of the survey.

The geographic position for the southeast corner of the township is at Latitude $37^{\circ} 58' 43.1''$ N. and longitude $112^{\circ} 21' 23.1''$ W. as adjusted from the data furnished in the Special Instructions.

TOWNSHIP 32 SOUTH, RANGE 5 WEST

CHAINS

The magnetic declination was read at a number of station throughout the township and the average of the several readings was found to be 15° 30' East.

Dependent Resurvey, Portion of the South Boundary, T. 32 S., R. 5 W.

Reestablishment of the Survey Executed by T. C. Bailey, Deputy Surveyor, in 1874

The cor. of Tps. 32 and 33 S., Rs. 4½ and 5 W., is determined by a lava stone, 5x12x14 ins., plainly mkd. 6 notches on 4 sides.

At the corner point

Set an iron post 30 ins. long, 2½ ins. diam., 24 ins. in the ground, in a collar of stone, with brass cap mkd.

T32S
R5W R4½W
S36 | S31
S1 | S6
T33S
R5W R4½W
1964

Bury original stone N. of corner.

Set cedar post 6 ins. diam., 5 ft. tall, E. of corner.

S. 89° 07' W., bet. secs. 1 and 36.

Over rolling brush covered bench land, desc. 10 ft. over NW. slope.

16.20 Wash, 3 ft. deep, 30 lks. wide, drains NW., desc. 35 ft. over gentle NW. slope.

40.00 The ¼ sec. cor. of secs. 1 and 36, monumented with a lava stone, 10x12x12 ins., plainly mkd. ¼.

At the corner point

Set an iron post 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T32S R5W
¼ S36
S1
T33S R5W
1964

Bury original stone N. of corner.

Dependent Resurvey, Portion of the South Boundary, T. 32 S., R. 5 W.

CHAINS

S. 89° 11' W., beginning new measurement.

Desc. 20 ft. over gentle NW. slope.

- 6.30 Wash, 2 ft. deep, 20 lks. wide, drains NW., desc. 15 ft. over gentle NW. slope.
- 20.21 Fence, 4 strand barb, bears N. and S.
- 39.90 Small wash, drains NW.
- 40.38 The cor. of secs. 1, 2, 35 and 36, determined by a mound of stone and fence corner. Fence bears N., S. and W. This corner position was verified by Roy Veater, local property owner.

At the corner point

Set an iron post 30 ins. long, 2½ ins. diam., 24 ins. in the ground, in a collar of stone, with brass cap mkd.

T32S R5W

S35|S36
S2|S1

T33S R5W

1964

Land, rolling bench.

Soil, clay with gravel spots..

Timber, none.

Undergrowth, sagebrush and shadscale.

S. 89° 27' W., bet. secs. 2 and 35.

Over rolling bench land, desc. 15 ft. over gentle NW. slope; along old E. and W. fence line.

- 3.60 Large wash, 6 ft. deep, 1.50 chs. wide, drains NW.
- 28.60 Trail road, bears NE. and SW.
- 40.23 The ¼ sec. cor. of secs. 2 and 35, monumented with a sandstone, 14x12x8 ins., set in line with old E. and W. fence line, plainly mkd. ¼.

At the corner point

Set an iron post 30 ins. long, 2½ ins. diam., 24 ins. in the ground, in a collar of stone, with brass cap mkd.

T32S R5W

¼ S35
S2

T33S R5W

1964

Dependent Resurvey, Portion of the South Boundary, T. 32 S., R. 5 W.

CHAINS

Bury original stone N. of corner.

S. 89° 32' W., beginning new measurement.

Desc. 25 ft. over gentle E. slope, along old E. and W. fence line.

25.50 Enter nearly level river bottom land.

40.50 Point selected for the witness cor. of secs. 2, 3, 34 and 35.

Set an iron post 30 ins. long, 2½ ins. diam., 24 ins. in the ground, in a collar of stone, with brass cap mkd.

T32S R5W

W ← S34 | S35
C ← S3 | S2

T33S R5W

1964

40.90 Right bank of Sevier River, bears NE. and SW. irregularly, thence across river, water about 1 ft. deep.

40.98 True point for the cor. of secs. 2, 3, 34 and 35, determined by intersection of property lines from N., S., E. and W. This position was verified by Roy Veater, adjacent property owner, and lifetime resident of this area. This position now falls in river and cannot be monumented.

Land, rolling.

Soil, clay.

Timber, none.

Undergrowth, sagebrush and shadscale.

From the true point for the cor. of secs. 2, 3, 34 and 35.

S. 88° 59' W., bet. secs. 3 and 34.

Across Sevier River, about 1 ft. deep, 1 ch. wide.

.80 Left bank Sevier River, bears NE. and SW.

2.00 Gravel road, bears NW. and SE. over bridge, thence S.

2.20 Fence cor., fence bears SE. and W., thence along fence line with pasture land S. of fence and brushland N. of fence.

27.29 Leave fence line, fence bears to SW., thence over rolling brushland.

37.29 U. S. Highway No. 89, hard surface, bears N. 32° 50' E. and S. 32° 50' W.

38.46 Telephone line, 12 strand, parallels highway, asc. gentle SE. slope.

Dependent Resurvey, Portion of the South Boundary, T. 32 S., R. 5 W.

CHAINS

- 40.26 Point for the $\frac{1}{4}$ sec. cor. of secs. 3 and 34, at proportionate distance; there is no remaining evidence of original corner.
- Asc. 55 ft. over SE. slope, of rocky bench.
- 52.60 Wash, 3 ft. deep, 20 lks. wide, drains SE.; asc. 50 ft. over SE. slope.
- 60.70 Trail road, bears NW. and SE.; asc. 30 ft. over SE. slope.
- 67.36 Powerline, bears N. $24^{\circ} 50'$ E. and S. $24^{\circ} 50'$ W.; asc. 25 ft. over SE. slope.
- 80.52 Point for the cor. of secs. 3, 4, 33 and 34, at proportionate distance; there is no remaining evidence of original corner.
- Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, in a collar of stone, with brass cap mkd.

T32S R5W

S33	S34
-----	-----

S4 S3

T33S R5W

1964

Land, rolling.
Soil, gravelly, rocky on W. portion.
Timber, none.
Undergrowth, sagebrush and shadscale.

S. $88^{\circ} 59'$ W., bet. secs. 4 and 33.

Over gravelly bench land draining SE.; asc. SE. slope.

- 2.00 Base of low hills; asc. 40 ft. over E. slope.
- 4.42 Powerline, bears S. 50° E. and N. 50° W.; asc. 25 ft. over E. slope.
- 7.10 Low spur, slopes SE.; desc. 70 ft. over SW. slope.
- 13.60 Small draw, drains SE.; asc. 60 ft. over NE. slope.
- 18.70 Low spur, slopes SE.; asc. 65 ft. over SE. slope.
- 32.00 Low spur, slopes SE.; desc. 75 ft. over W. slope.
- 37.60 Draw, drains SE.; asc. 80 ft. over E. slope. Enter scattered timber.
- 40.26 Point for the $\frac{1}{4}$ sec. cor. of secs. 4 and 33, at proportionate distance; there is no remaining evidence of original corner. This cor. will now function for the N. $\frac{1}{4}$ sec. cor. of sec. 4, T. 33 S., R. 5 W., only. Cor. markings are altered to read:

T32S R5W

$\frac{1}{4}$	S4
---------------	----

T33S R5W

1964

Dependent Resurvey, Portion of the South Boundary, T. 32 S., R. 5 W.

CHAINS

- Asc. 50 ft. over E. slope.
- 40.51 Point for the S. $\frac{1}{4}$ sec. cor. of sec. 33 at 40.00 chs. in easting from the cor. of secs. 4, 5, 32 and 33.
- Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 8 ins. in the ground to bedrock, in a mound of stone, 4 ft. base to top, with brass cap mkd.
- T32S R5W
 $\frac{1}{4}$ S33
T33S R5W
1964
- 43.10 Ridge, bears N. and S. irregular; also trail road, bears N. and S.; desc. 150 ft. over W. slope.
- 54.50 Draw, drains S. about 10.00 chs. to junction, thence SE.; asc. 150 ft. over E. slope.
- 60.50 Spur, slopes S.; desc. 120 ft. over W. slope.
- 67.40 Wash in draw, drains SE.; asc. 200 ft. over ledgy E. slope.
- 74.40 Crest of ledgy E. slope; asc. 55 ft. over gentle E. slope of ridge, through dense timber.
- 80.52 The cor. of secs. 4, 5, 32 and 33, marked by an iron post $2\frac{1}{2}$ ins. diam., set, mkd. and witnessed as recorded in the survey of a portion of the subdivision, in 1960.
- Land, broken mountain.
Soil, rocky gravel.
Timber, juniper and pinon on W. portion.
Undergrowth, sagebrush.
-
- Dependent Resurvey of the East Boundary, T. 32 S.,
R. 5 W., Panguitch Guide Meridian, Utah
-
- Reestablishment of the Survey Executed by
J. G. Burrill, Deputy Surveyor, in 1874
- From the cor. of Tps. 32 and 33 S., Rs. $4\frac{1}{2}$ and 5 W., previously described.
- N. $0^{\circ} 24'$ E., bet. secs. 31 and 36.
- Over brushy benchland; asc. 35 ft. along gentle W. slope.
- 7.30 Small wash, drains W.
- 12.20 Low rise, slopes W.; desc. 40 ft. over N. slope.
- 20.00 Wash, 5 ft. deep, 30 lks. wide, drains N. 75° W.; asc. 65 ft. over SW. slope.
- 33.10 Low spur, slopes W.; thence along W. slope.

Dependent Resurvey, East Boundary, T. 32 S., R. 5 W.

CHAINS

40.24

The $\frac{1}{2}$ sec. cor. of secs. 31 and 36, monumented with a sandstone, 14x14x18 ins., plainly mkd. $\frac{1}{4}$.

At the corner point

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, in a collar of stone, with brass cap mkd.

T32S
R5W R4 $\frac{1}{2}$ W
 $\frac{1}{4}$
S36 | S31
1964

Bury original stone W. of corner.

Corner is located on low spur, which slopes W.

N. 0° 16' E., beginning new measurement.

Desc. 20 ft. along gentle W. slope.

5.40

Wash, 2 ft. deep, 20 lks. wide, drains N. 75° W., asc. 55 ft. over SW. slope.

19.00

Low spur, slopes SW., desc. 65 ft. over N. slope.

26.60

Small wash, drains N. 80° W.; asc. 90 ft. over SW. slope.

39.00

Spur, slopes W.; desc. 15 ft. over N. slope.

40.07

The cor. of secs. 25, 30, 31 and 36, monumented by a sandstone, 12x14x18 ins., plainly mkd. 1 notch on S., and 5 notches on N. face.

At the corner point

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, in a collar of stone, with brass cap mkd.

T32S
R5W R4 $\frac{1}{2}$ W
S25 | S30
S36 | S31
1964

Land, rolling bench.

Soil, gravelly.

Timber, none.

Undergrowth, sagebrush and shadscale.

N. 0° 10' E., bet. secs. 25 and 30.

Over broken bench land, desc. 30 ft. over N. slope.

5.40

Wash, 3 ft. deep, 30 lks. wide, drains W., desc. 20 ft. along gentle W. slope of bench.

Dependent Resurvey, East Boundary, T. 32 S., R. 5 W.

CHAINS

35.60 Wash, 3 ft. deep, 50 lks. wide, drains N. 75° W.; desc. 20 ft. over gentle NW. slope.

40.27 The 1/2 sec. cor. of secs. 25 and 30, monumented by a granite stone, 8x12x16 ins., plainly mkd. 1/2.

At the corner point

Set an iron post 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, in a collar of stone, with brass cap mkd.

T32S
R5W R4 1/2 W
1/2
S25 | S30
1964

Bury original stone W. of corner.

North, beginning new measurement.

Desc. 85 ft. over gentle NW. slope.

32.40 Small wash, drains N. 75° W.; asc. 35 ft. over SW. slope, across rolling hills.

40.26 The cor. of secs. 19, 24, 25 and 30, monumented by a volcanic stone, 12x14x18 ins., plainly mkd. 2 notches on S., and 4 notches on N. face.

At the corner point

Set an iron post 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.

T32S
R5W R4 1/2 W
S24 | S19
S25 | S30
1964

Bury original stone beside corner.

Raised mound of stone 3 ft. base, 2 1/2 ft. high, W. of corner.

Land, broken.
Soil, gravelly.
Timber, none.
Undergrowth, sagebrush and shadscale.

N. 0° 21' E., bet. secs. 19 and 24.

Over rolling hills covered with shadscale, desc. 40 ft. over general W. slope.

Dependent Resurvey, East Boundary, T. 32 S., R. 5 W.

CHAINS	
3.40	Wash, 2 ft. deep, 30 lks. wide, drains W.; asc. 60 ft. over S. slope.
13.60	Spur, slopes W.; desc. 160 ft. over N. slope.
24.00	Wash, 3 ft. deep, 10 lks. wide, drains W., thence along W. slope, near E. edge of valley.
31.70	Small wash; drains W.
38.60	Small spur, slopes W. about 4 chs. to valley edge; desc. 30 ft. along W. slope.
40.00	The $\frac{1}{4}$ sec. cor. of secs. 19 and 24, marked by a volcanic stone, 8x12x12 ins., plainly mkd. $\frac{1}{4}$.
	At the corner point
	Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, in a collar of stone, with brass cap mkd.
	T32S R5W R4 $\frac{1}{2}$ W $\frac{1}{4}$ S24 S19 1964
	Bury original stone W. of iron post.
	Corner falls on S. side of small drain, which drains W. about 7 chs. to Sevier River.
	<hr style="width: 20%; margin: auto;"/> N. 0° 06' E., beginning new measurement.
	Desc. 35 ft. along W. slope.
3.83	Fence, 4 strand, bears N. irregular and S. 67° W., thence along gentle W. slope on E. side of valley. Leave hills.
40.19	The cor. of secs. 13, 18, 19 and 24, monumented by a volcanic stone, 12x12x16 ins., plainly mkd. 3 notches on N. and S. faces.
	At the corner point
	Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, in a collar of stone, with brass cap mkd.
	T32S R5W R4 $\frac{1}{2}$ W <u>S13 S18</u> <u>S24 S19</u> 1964
	Place original stone beside iron post.
	Corner is located at fence corner, fence bears N., S., E. and W.

Dependent Resurvey, East Boundary, T. 32 S., R. 5 W.

CHAINS

Land, hills S. portion, rolling N. portion.
Soil, mountain gravel.
Timber, none.
Undergrowth, sagebrush and shadscale.

N. 0° 11' E., bet. secs. 13 and 18.

Over brushy land on E. side of valley, along fence line over gentle W. slope.

17.10 Powerline, bears N. 60° E. and S. 60° W.

33.80 Gravel road, bears E. and W., 3.50 chs. to U. S. Highway No. 89, and 50 lks. W. to bridge over Sevier River.

34.50 Right bank of Sevier River, bears NE. and SW., thence over river, water about 1 ft. deep.

35.50 Left bank same river, bears NE. and SW., thence over pasture land.

40.43 Point for the $\frac{1}{4}$ sec. cor. of secs. 13 and 18, at proportionate distance; there is no remaining evidence of original corner.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, in a collar of stone, with brass cap mkd.

T32S
R5W R4 $\frac{1}{2}$ W
 $\frac{1}{4}$
S13 | S18
1964

Set steel fence post, 5 ft. high, beside iron post.

Continue over small pasture.

45.00 Net wire fence, also telephone line, bears N. 10° 40' E. and S. 10° 40' W.

48.24 Center of U. S. Highway No. 89, bears N. 10° 40' E. and S. 10° 40' W., 25.00 chs. dist., thence curves SW.

51.20 Net wire fence, parallel highway, thence over small pasture.

71.60 Base of ledges, bears E. and W.; asc. 150 ft. over ledgy S. slope.

78.70 Ledgy spur, slopes E.; desc. 75 ft. over N. slope.

80.86 The cor. of secs. 7, 12, 13 and 18, determined by a mound of stone, no positive markings on stones. This location fits calls of original field notes.

At the corner point

Dependent Resurvey, East Boundary, T. 32 S., R. 5 W.

CHAINS

Set an iron post 30 ins. long, 2½ ins. diam., 10 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T32S
R5W R4½W

S12	S7
S13	S18

1964

Land, rolling S. portion, mountain N. portion.
Soil, clay S. portion, ledgy and rocky N. portion.
Timber, none.
Undergrowth, sagebrush.

N. 0° 41' E., bet. secs. 7 and 12.

Over broken mountain land; desc. 75 ft. over N. slope.

- 1.50 Small draw, drains E.; asc. 50 ft. along ledgy E. slope.
5.00 Ledgy point, projects E.; desc. 100 ft. along E. slope.
10.50 Leave ledges, thence along brushy E. slope.
36.58 The E. ¼ sec. cor. of sec. 12, T. 32 S., R. 5 W., hereinafter described.
39.79 The ¼ sec. cor. of secs. 7 and 12, monumented with a volcanic stone, 10x12x12 ins., plainly mkd. ¼. This cor. will now function for the W. ¼ sec. cor. of sec. 7, T. 32 S., R. 4½ W. only.

At the corner point

Set an iron post 30 ins. long, 2½ ins. diam., 24 ins. in the ground, in a collar of stone, with brass cap mkd.

T32S
R5W R4½W
|
¼
|
S7

1964

Bury original stone beside iron post.

N. 1° 16' E., beginning new measurement.

Continue along brushy E. slope.

- 6.00 Draw, drains E.; continue along E. slope.
15.00 Enter low hills; asc. 100 ft. over SW. slope.
30.00 Spur, slopes SE.; desc. 60 ft. over NE. slope.
32.00 Small ravine, drains SE.

Dependent Resurvey, East Boundary, T. 32 S., R. 5 W.

CHAINS

36.80 The closing cor. of secs. 1 and 12, T. 32 S., R. 5 W., hereinafter described.

40.82 The cor. of secs. 1, 6, 7 and 12, monumented with an iron post 3 ins. diam., set, mkd. and witnessed as recorded in the survey of a portion of the E. bdy., in 1911. This cor. will now function as the cor. of secs. 6 and 7, T. 32 S., R. 4½ W. only and was remkd.

T32S R4½W

R5W

S1 | S6

| S7

1911

64

Land, broken.

Soil, clay with gravel and rocky spots.

Timber, none.

Undergrowth, sagebrush.

Reestablishment of the Survey Executed by
Quinbly Stewart, Deputy Surveyor, in 1911

North, bet. secs. 1 and 6.

Over broken mountainous land; asc. 40 ft. along E. slope.

2.00 Spur, slopes E.; desc. 100 ft. over N. slope.

9.50 Wash, 2 ft. deep, 30 lks. wide, drains E.

10.10 Trail road, bears W. and E. about 20.00 chs. to U. S. Highway No. 89; asc. 600 ft. over S. slope of ridge. Enter scrub timber.

35.98 The E. ¼ sec. cor. of sec. 1, T. 32 S., R. 5 W., hereinafter described.

38.20 Ridge, bears E. and W.; desc. 35 ft. over N. slope.

39.85 The ¼ sec. cor. of secs. 1 and 6, monumented with an iron post 1 in. diam., set and mkd. as described in the survey of a portion of the E. bdy., in 1911. This cor. will now function as the W. ¼ sec. cor. of sec. 6, T. 32 S., R. 4½ W. only.

from which

A pinon, 12 ins. diam., bears N. 76½° E., 28 lks. dist., mkd. ¼ S6 BT.

A pinon, 10 ins. diam., bears N. 61° W., 22 lks. dist., mkd. ¼ S1 BT. The mks. on this tree were obliterated.

At the corner point

Dependent Resurvey, East Boundary, T. 32 S., R. 5 W.

CHAINS

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins. in the ground, to bedrock, in a mound of stone, 3 ft. base to top, with brass cap mkd.

T32S
R5W R4 $\frac{1}{2}$ W
|
 $\frac{1}{2}$
|
S6
1964

Bury original iron post, which had rusted beyond use, beside iron post.

Desc. 400 ft. over N. slope.

65.10 Wash, 3 ft. deep, 30 lks. wide, drains E.; asc. 30 ft. over S. slope in canyon.

78.40 Base of steep ascent, bears E. and NW.; asc. 115 ft. over ledgy S. slope.

79.86 The cor. of Tps. 31 S., Rs. 4 and 5 W., and Tps. 32 S., Rs. 4 $\frac{1}{2}$ and 5 W., monumented with an iron post, 3 ins. diam., set, and witnessed as described in the survey of a portion of the E. bdy. of the Tp., in 1911, and mkd.

T31S
R5W R4W
S36 | S31
S1 | S6
R5W R4 $\frac{1}{2}$ W
T32S
1911
64

Land, broken mountain.
Soil, mountain gravel.
Timber, scattered juniper and pinon.
Undergrowth, shadscale.

Retracement of the Survey Executed by
Quinbly Stewart, Deputy Surveyor, in 1911

From the cor. of secs. 5, 6, 31 and 32, on the N. bdy. of the Tp., monumented with an iron post 3 ins. in diam., set, mkd. and witnessed as recorded in the survey of the S. bdy. of T. 31 S., R. 5 W., in 1911.

West, bet. secs. 6 and 31.

The topography being substantially the same as recorded in the survey of the S. bdy. of T. 31 S., R. 5 W., in 1911, is not entered in this retracement.

40.00 The $\frac{1}{2}$ sec. cor. of secs. 6 and 31, monumented with an iron post 1 in. diam., set, mkd. and witnessed as described in the survey of the S. bdy. of T. 31 S., R. 5 W., in 1911.

Dependent Resurvey, East Boundary, T. 32 S., R. 5 W.

CHAINS	
80.12	The closing cor. of Tps. 32 S., Rs. 5 and 5½ W., an iron post 2½ ins. diam., set, mkd. and witnessed as described in the survey of the E. bdy. of T. 32 S., R. 5½ W., in 1960.
	Dependent Resurvey, Portion of the Subdivisional Lines, T. 32 S., R. 5 W., Salt Lake Meridian, Utah
	Reestablishment of the Survey Executed by T. C. Bailey and J. G. Burrill, Deputy Surveyors, in 1874
	<hr/> <p>From the cor. of secs. 1, 2, 35 and 36, on the S. bdy. of the Tp.</p> <p>N. 0° 12' E., bet. secs. 35 and 36.</p>
0.10	<p>Small wash, drains NW.</p> <p>Over rolling valley land covered with sagebrush; desc. 30 ft. along gentle W. slope, along N. and S. fence line.</p>
40.06	<p>The ¼ sec. cor. of secs. 35 and 36, monumented with a conglomerate stone, 10x12x18 ins., plainly mkd. ¼.</p> <p>At the corner point</p> <p>Set an iron post 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T32S R5W</p> <p> ½</p> <p>S35 S36</p> <p> </p> <p> 1964</p> </div> <p>Bury original stone beside iron post.</p> <hr/> <p>N. 0° 20' E., beginning new measurement.</p> <p>Desc. 20 ft. along gentle W. slope, along N. and S. fence line.</p>
20.00	<p>Enter meadow land, also fence cor., fence bears N., S. and W.</p>
40.34	<p>The cor. of secs. 25, 26, 35 and 36, determined latitudinally by proportionate measurement, and longitudinally by fence bearing N. and S.</p> <p>At the corner point</p>

Dependent Resurvey, Portion of the Subdivision, T. 32 S., R. 5 W.

CHAINS

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T32S R5W

<u>S26</u>	<u>S25</u>
S35	S36

1964

Land, rolling S. portion, level bottom land on N. portion.

Soil, sandy clay.

Timber, none.

Undergrowth, sagebrush on S. portion, grass pasture on N. portion.

From the cor. of secs. 25, 30, 31 and 36, on the E. bdy. of the Tp.

S. $89^{\circ} 05' W.$, bet. secs. 25 and 36.

Over brush covered hills; asc. 20 ft. along N. slope of small spur.

2.00 Crest of spur, slopes N. $80^{\circ} W.$; desc. 100 ft. over general W. slope, along S. side of small hollow.

38.50 Wash in hollow, drains S. $80^{\circ} W.$; desc. 20 ft. along N. side of hollow.

40.40 The $\frac{1}{2}$ sec. cor. of secs. 25 and 36, monumented with a volcanic stone, 10x10x12 ins., plainly mkd. $\frac{1}{2}$.

At the corner point

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, in a collar of stone, with brass cap mkd.

T32S R5W

$\frac{1}{2}$ <u>S25</u>	<u>S36</u>
--------------------------	------------

1964

Bury original stone beside iron post.

S. $89^{\circ} 08' W.$, beginning new measurement.

Desc. 90 ft. over general W. slope, along N. side of small hollow.

20.00 Leave hills, enter valley bottom land.

40.06 The cor. of secs. 25, 26, 35 and 36.

Land, hills in E. portion, bottom land W. portion.

Soil, gravelly E. portion, clay on W. portion.

Timber, none.

Undergrowth, sagebrush on E. portion, grass on W. portion.

Dependent Resurvey, Portion of the Subdivision, T. 32 S., R. 5 W.

CHAINS

N. 0° 31' E., bet. secs. 25 and 26.

Over valley pasture land, along N. and S. fence line.

1.90 Right bank Sevier River, bears NE. and SW.; thence across river, water about 1 ft. deep.

3.90 Left bank same river, bears NE. and SW.; thence over grass pasture land.

40.34 The $\frac{1}{4}$ sec. cor. of secs. 25 and 26, determined latitudinally by proportionate measurement, and longitudinally by fence bearing N. and S.

At the corner point

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T32S R5W

$\frac{1}{4}$
S26 | S25

1964

No accessories available.

N. 0° 09' W., beginning new measurement.

Continue over pasture land, along N. and S. fence.

15.00 Slough, drains NE.

20.00 Fence corner, fence bears N., S. and W.

35.75 Road, unimproved, bears W. and E., 5.00 chs.; thence S. 6.00 chs. to Dan Perkins ranch house.

36.00 Leave pasture land, enter tall brush, also pole fence of old corral.

39.25 Small wash, drains E.

40.34 Point for the cor. of secs. 23, 24, 25 and 26, at proportionate distance; there is no remaining evidence of original corner.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T32S R5W

S23 | S24
S26 | S25

1965

No accessories available.

Dependent Resurvey, Portion of the Subdivision, T. 32 S., R. 5 W.

CHAINS	
40.18	<p>Land, level bottom land. Soil, clay. Timber, none. Undergrowth, grass pasture, sagebrush on N. 4.00 chs.</p> <hr/> <p>From the cor. of secs. 19, 24, 25 and 30, on the E. bdy. of the Tp.</p> <p>S. 89° 44' W., bet. secs. 24 and 25.</p> <p>Over brushy bench land on E. side of valley; desc. 120 ft. over gentle W. slope.</p> <p>The $\frac{1}{4}$ sec. cor. of secs. 24 and 25, monumented with a sandstone 14x10x8 ins., plainly mkd. $\frac{1}{4}$.</p> <p>At the corner point</p> <p>Set an iron post 30 ins. long, 2$\frac{1}{2}$ ins. diam., 24 ins. in the ground, in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T32S R5W</p> <p style="text-align: center;">$\frac{1}{4}$ — $\frac{S24}{S25}$</p> <p style="text-align: center;">1965</p> <p>Bury original stone N. of iron post.</p> <hr style="width: 20%; margin: 10px auto;"/>
8.20	<p>S. 88° 35' W., beginning new measurement.</p> <p>Desc. 20 ft. over gentle W. slope.</p>
15.50	<p>Enter level river bottom land.</p> <p>Right bank of Sevier River, bears NE. and SW. irregularly; thence across river, water about 1 ft. deep.</p>
16.60	<p>Left bank same river, bears NE. and SW. irregularly; thence over pasture land.</p>
35.40	<p>Fence, bears N. and S.; leave pasture land.</p>
40.25	<p>The cor. of secs. 23, 24, 25 and 26.</p> <p>Land, rolling hills E. portion, bottom land E. portion. Soil, gravelly E. portion, clay W. portion. Timber, none. Undergrowth, sagebrush on hills, grass on bottom land.</p> <hr/>
6.40	<p>N. 0° 30' W., bet. secs. 23 and 24.</p> <p>Over rolling land covered with sagebrush.</p> <p>Enter low hills leave valley land; asc. 70 ft. over SE. slope.</p>

Dependent Resurvey, Portion of the Subdivision, T. 32 S., R. 5 W.

CHAINS

14.30 Center U. S. Highway No. 89, bears N. 38° 06' E. and S. 38° 06' W.

16.07 Telephone line, parallel highway; asc. SE. slope.

24.00 Powerline, bears N. 42° 50' E. and S. 42° 50' W.; asc. 40 ft. over SE. slope.

40.34 The $\frac{1}{2}$ sec. cor. of secs. 23 and 24, monumented with a granite stone, 13x16x24 ins., plainly mkd. $\frac{1}{2}$.

At the corner point

Set an iron post 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 8 ins. in the ground, to bedrock, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T32S R5W

$\frac{1}{2}$
S23 | S24

1964

Bury original stone beside iron post.

N. 0° 30' E., beginning new measurement.

Asc. 50 ft. over brush covered hills draining E.

8.40 Spur, slopes E.; asc. 150 ft. over SE. slope.

35.40 Crest of low ridge, bears E. and W.; desc. 85 ft. over N. slope.

40.03 The cor. of secs. 13, 14, 23 and 24, monumented by a granite stone, 8x8x20 ins., plainly mkd. 1 notch on E. and 3 notches on S. face.

At the corner point

Set an iron post 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 18 ins. in the ground, in a collar of stone, with brass cap mkd.

T32S R5W

S14 | S13
S23 | S24

1965

Place original stone beside iron post.

Land, broken hills.
Soil, mountain gravel.
Timber, none.
Undergrowth, sagebrush.

Dependent Resurvey, Portion of the Subdivision, T. 32 S., R. 5 W.

CHAINS	
	<p>From the cor. of secs. 13, 18, 19 and 24, on the E. bdy. of the Tp.</p> <p>S. 89° 10' W., bet. secs. 13 and 24, along fence line.</p> <p>Over brush covered valley land; desc. 20 ft. over gentle W. slope.</p>
10.10	Small pond, 4 chs. long, 50 lks. wide.
12.60	Right bank of Sevier River, bears N. 15° E. and S. 15° W.; thence over river, water about 1 ft. deep.
13.70	Left bank same river, bears N. 15° E. and S. 15° W.; thence over pasture land.
24.95	Net wire fence, parallel to highway.
26.25	Center of U. S. Highway No. 89, bears N. 55° 26' E. and curves to S. 38° 20' W.
27.50	Telephone line, parallel to highway.
28.00	Small corral and farm equipment shed.
29.50	Small ledgy outcrop, about 10 ft. high.
30.76	Enter small cultivated field.
34.30	Powerline, bears N. 42° 54' E. and S. 42° 54' W.
40.34	<p>Point for the ¼ sec. cor. of secs. 13 and 24, at proportionate distance; there is no evidence of original corner.</p> <p>Set an iron post 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T32S R5W</p> <p style="text-align: center;">¼ $\frac{S13}{S24}$</p> <p style="text-align: center;">1965</p> <p>Raised mound of stone 3 ft. base, 2½ ft. high, N. of corner.</p> <p>Cor. falls on W. edge of small field; asc. 90 ft. over E. slope.</p>
57.70	Saddle on small spur, spur slopes S.; desc. 90 ft. over W. slope.
67.60	Unimproved road in small hollow, bears N. and S. irregularly; asc. 50 ft. over E. slope.
73.00	Small spur, slopes NE.; desc. 35 ft. along N. slope.
80.68	<p>The cor. of secs. 13, 14, 23 and 24.</p> <p>Land, nearly level E. portion, broken W. portion. Soil, clay E. portion, mountain gravel W. portion. Timber, none. Undergrowth, sagebrush.</p>

Dependent Resurvey, Portion of the Subdivision, T. 32 S., R. 5 W.

CHAINS

- N. 1° 23' E., bet. secs. 13 and 14.
Over broken mountain land; desc. 30 ft. over N. slope.
- 4.30 Wash in small canyon, drains S. 80° E.
- 4.70 Unimproved road in canyon, bears S. 80° E. and N. 80° W.; asc. 210 ft. over S. slope.
- 27.20 Spur, slopes SE.; asc. 40 ft. along E. slope.
- 39.38 Point for the $\frac{1}{2}$ sec. cor. of secs. 13 and 14, at proportionate distance; there is no remaining evidence of original corner.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 4 ins. in the ground, to bedrock, in a mound of stone, 4 ft. base to top, with brass cap mkd.
- T32S R5W
 $\frac{1}{2}$
S14|S13
1965
- Asc. 40 ft. along E. slope.
- 70.00 Point, projects E.; desc. 55 ft. over NE. slope.
- 73.10 Small draw, drains SE.; asc. 15 ft. over SW. slope.
- 78.76 The cor. of secs. 11, 12, 13 and 14, monumented with an iron post, $2\frac{1}{2}$ ins. diam., set, mkd. and witnessed as described in the survey of a portion of the subdivision, in 1960.

Land, broken.
Soil, mountain gravel and granite boulders.
Timber, scattered juniper and pinon.
Undergrowth, sagebrush and shadscale.

- From the cor. of secs. 7, 12, 13 and 18, on the E. bdy. of the Tp.

S. 87° 34' W., bet. secs. 12 and 13.

Over broken mountain land; asc. 300 ft. over irregular ledges facing E.
- 4.60 Crest of ledges, bears N. and S. irregularly; asc. 40 ft. over top of ridge.
- 20.80 W. crest of ridge, bears N. and S. irregularly; desc. 50 ft. over W. slope.
- 39.00 Point for the S. $\frac{1}{2}$ sec. cor. of sec. 12, at 40.00 chs. easting from the cor. of secs. 11, 12, 13 and 14.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. in diam., on solid sandstone, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T32S R5W
 $\frac{1}{2}$ S12
1965

Dependent Resurvey, Portion of the Subdivision, T. 32 S., R. 5 W.

CHAINS	
39.40	Bottom small ravine, small stream of water, drains S.; asc. E. slope.
39.52	Point for the $\frac{1}{2}$ sec. cor. of secs. 12 and 13, at proportionate distance; there is no remaining evidence of original corner. This cor. will now function as the N. $\frac{1}{2}$ sec. cor. of sec. 13 only. Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd. T32S R5W $\frac{1}{2}$ S13 1965 Raised mound of stone 3 ft. base, $2\frac{1}{2}$ ft. high, S. of corner. Asc. 70 ft. over E. slope.
40.50	Unimproved road, bears S. and NW. irregularly.
58.10	Ridge, bears N. and S.; desc. 150 ft. over W. slope.
70.00	Small draw, drains S.; asc. 100 ft. over E. slope.
78.50	Spur, slopes S.; desc. 10 ft. over SW. slope.
79.04	The cor. of secs. 11, 12, 13 and 14. Land, broken mountain. Soil, mountain gravel. Timber, juniper pinon. Undergrowth, sagebrush.
	From the true point for the cor. of secs. 2, 3, 34 and 35, on the S. bdy. of the Tp., from which its witness cor. bears N. $89^{\circ} 32'$ E., 0.48 lks. dist. True point falls in Sevier River.
	N. $0^{\circ} 37'$ E., bet. secs. 34 and 35.
	Across Sevier River, water about 1 ft. deep, flows NE.
.90	Left bank of river, bears irregularly NE. and SW.; asc. 40 ft. over gentle S. slope, along the E. side of a N. and S. fence line.
17.50	Roy Veater's farm house and corrals bear E., 1.00 ch. dist.
21.60	Leave fence line, fence bears NE.; asc. SE. slope covered with brush.
36.10	Wash, 6 ft. deep, 30 lks. wide, drains S. 80° E.
39.40	Small wash, drains S. 75° E.
40.45	Point for the $\frac{1}{2}$ sec. cor. of secs. 34 and 35, at proportionate distance; there is no remaining evidence of the original corner.

Dependent Resurvey, Portion of the Subdivision, T. 32 S., R. 5 W.

CHAINS

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T32S R5W

$\frac{1}{4}$
S34|S35

1965

Raised mound of stone 3 ft. base, $2\frac{1}{2}$ ft. high, W. of corner.

Over hilly brush covered land; asc. 20 ft. along gentle E. slope.

56.55 U. S. Highway No. 89, hard surface, bears N. $32^{\circ} 50'$ E. and S. $32^{\circ} 50'$ W.

58.32 Telephone line, parallel to highway, continues along gentle E. slope.

80.90 The cor. of secs. 26, 27, 34 and 35, monumented with a granite stone 8x12x15 ins., plainly mkd. 1 notch on S. and 2 notches on E. face.

At the corner point

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, in a collar of stone, with brass cap mkd.

T32S R5W

S27|S26
S34|S35

1964

Bury original stone beside iron post.

Land, rolling.
Soil, mountain gravel.
Timber, none.
Undergrowth, sagebrush.

From the cor. of secs. 25, 26, 35 and 36.

N. $89^{\circ} 42'$ W., bet. secs. 26 and 35.

Over grass covered pasture land of Sevier River bottom land.

2.30 Right bank of Sevier River, bears NE. and SW.; thence over river flowing NE. Water about 1 ft. deep.

3.20 Left bank same river, bears NE. and SW., continue over pasture land.

Dependent Resurvey, Portion of the Subdivision, T. 32 S., R. 5 W.

CHAINS

- 38.50 Slough, 80 lks. wide, drains N., about 2 chs. to head.
- 40.33 Point for the $\frac{1}{4}$ sec. cor. of secs. 26 and 35, determined longitudinally by proportionate measurement, and latitudinally by fence from the W.
- At the corner point
- Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.
- T32S R5W
 $\frac{1}{4}$ $\frac{S26}{S35}$
 1964
-
- S. $89^{\circ} 20'$ W., beginning new measurement.
- Continue over pasture land, along irregular E. and W. fence line.
- 10.80 Old house and corrals.
- 11.70 Fence, bears N. and S.; asc. 120 ft. over gentle E. slope, leave pasture land.
- 24.69 U. S. Highway No. 89, hard surface, bears N. $32^{\circ} 50'$ E. and S. $32^{\circ} 50'$ W.
- 26.46 Telephone line, parallel highway; asc. gentle E. slope.
- 40.33 The cor. of secs. 26, 27, 34 and 35.
- Land, level E. portion, rolling hills W. portion.
 Soil, clay E. portion, mountain gravel W. portion.
 Timber, none.
 Undergrowth, grass on pasture land, sagebrush on W. portion.
-
- N. $0^{\circ} 05'$ E., bet. secs. 26 and 27.
- Over hilly brush covered land; asc. 30 ft. along gentle E. slope.
- 7.00 Small wash, drains E.
- 25.37 Powerline, bears N. $42^{\circ} 50'$ E. and S. $42^{\circ} 50'$ W., also wash, drains E. about 7 chs. dist., thence SE.
- 40.29 The $\frac{1}{4}$ sec. cor. of secs. 26 and 27, monumented with a granite stone, 8x11x14 ins., plainly mkd. $\frac{1}{4}$.
- At the corner point
- Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground, in a collar of stone, with brass cap mkd.

Dependent Resurvey, Portion of the Subdivision, T. 32 S., R. 5 W.

CHAINS

T32S R5W

$$\frac{1}{4}$$
 S27 | S26

1964

Place original stone beside iron post.

Raised mound of stone 3 ft. base, 2½ ft. high, W. of corner.

 N. 0° 34' E., beginning new measurement.

Asc. 110 ft. over brush covered SE. slope.

- 2.00 Wash, 4 ft. deep, 40 lks. wide, drains SE.
- 20.50 Graded dirt road, Dog Valley to Highway No. 89, bears NW. and SE.
- 25.70 Small wash, drains E.
- 40.17 The cor. of secs. 22, 23, 26 and 27, monumented with a granite stone, 10x12x18 ins., plainly mkd. 2 notches on S. and E. faces.
- At the corner point
- Set an iron post 30 ins. long, 2½ ins. diam., 22 ins. in the ground, in a collar of stone, with brass cap mkd.

T32S R5W

$$\frac{S22 | S23}{S27 | S26}$$

1964

Bury original stone beside iron post.

Land, rolling hills.
 Soil, mountain gravel.
 Timber, none.
 Undergrowth, sagebrush.

From the cor. of secs. 23, 24, 25 and 26.

S. 89° 52' W., bet. secs. 23 and 26.

Over brush covered hills; asc. 80 ft. over gentle E. slope.

- 2.80 Wash, 3 ft. deep, 30 lks. wide, drains SE.
- 10.70 U. S. Highway No. 89, hard surface, bears N. 38° 08' E. and S. 38° 08' W.

Dependent Resurvey, Portion of the Subdivision, T. 32 S., R. 5 W.

CHAINS

- 11.70 Telephone line, parallel highway.
 11.80 4 strand barbed wire fence, parallel highway.
 13.50 Small wash, drains SE.
 25.80 Wash, 3 ft. deep, 20 lks. wide, drains S. 70° E.
 29.10 Powerline, bears N. 42° 50' E. and S. 42° 50' W.
 40.24 The $\frac{1}{4}$ sec. cor. of secs. 23 and 26, monumented with a volcanic stone, 10x12x15 ins., plainly mkd. $\frac{1}{4}$.

At the corner point

Set an iron post 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T32S R5W

$\frac{1}{4}$ $\frac{S23}{S26}$

1965

Bury original stone beside iron post.

Raised mound of stone 3 ft. base, 2 $\frac{1}{2}$ ft. high, N. of corner.

S. 89° 24' W., beginning new measurement.

Asc. 85 ft. over brush E. slope.

- 16.70 Wash, 3 ft. deep, 20 lks. wide, drains SE.
 31.20 Wash, 1 ft. deep, 10 lks. wide, drains SE.
 34.80 Base of steeper ascent, bears NE. and SW. irregularly; asc. 80 ft. over SE. slope.
 40.20 The cor. of secs. 22, 23, 26 and 27.
 Land, rolling and broken hills.
 Soil, mountain gravel.
 Timber, none.
 Undergrowth, sagebrush.

N. 0° 27' E., bet. secs. 22 and 23.

Over hills covered with sagebrush and scattered juniper and pinon; desc. N. slope.

- 1.90 Small ravine, drains SE.; asc. 60 ft. over S. slope.

Dependent Resurvey, Portion of the Subdivision, T. 32 S., R. 5 W.

CHAINS

- 8.00 Spur, slopes SE.; desc. 50 ft. over N. slope.
- 23.90 Wash in ravine, drains SE.; asc. 135 ft. over S. slope.
- 37.90 Low ridge, bears SE. and N.; desc. 15 ft. on top of ridge.
- 40.00 The $\frac{1}{2}$ sec. cor. of secs. 22 and 23, monumented with a volcanic stone, 14x14x20 ins., plainly mkd. $\frac{1}{4}$.
- from which
- A pine, 12 ins. diam., bears S. 8° W., 120 lks. dist., mkd. $\frac{1}{4}$ S BT.
- A pine, 10 ins. diam., bears S. 89° W., 100 lks. dist., mkd. $\frac{1}{4}$ S BT.
- At the corner point
- Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 22 ins. in the ground, in a collar of stone, with brass cap mkd.
- T32S R5W
 $\frac{1}{4}$
 S22|S23
- 1965
- Bury original stone beside iron post.
-
- N. 0° 16' E., beginning new measurement.
- Asc. 35 ft. over top of ridge.
- 5.40 Leave top of ridge which bears to NW.; desc. 30 ft. over N. slope.
- 10.80 Small draw, drains SE.; asc. 35 ft. over S. slope.
- 15.60 Spur, slopes SE.; desc. 55 ft. over NE. slope.
- 21.10 Small ravine, drains NE.; asc. 50 ft. over SE. slope.
- 24.50 Spur, slopes E.; desc. 55 ft. over NE. slope.
- 29.80 Draw, drains SE.; asc. 85 ft. over SW. slope.
- 40.07 The cor. of secs. 14, 15, 22 and 23, monumented with a lava stone, 8x10x14 ins., plainly mkd. 3 notches on S. and 2 notches on E. face.
- from which
- A cedar, 12 ins. diam., bears S. 83° E., 152 lks. dist., mkd. T32S R5W S23 BT.

Dependent Resurvey, Portion of the Subdivision, T. 32 S., R. 5 W.

CHAINS

A pine, 10 ins. diam., bears N. 68° E., 119 lks. dist., mkd. S14 BT.

At the corner point

Set an iron post 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T32S R5W

S15	S14
S22	S23

1965

Bury original stone beside iron post.

Raised mound of stone 3 ft. base, 2 ft. high, W. of corner.

Land, broken hills.
Soil, rocky mountain gravel.
Timber, juniper and pinon.
Undergrowth, sagebrush.

From the cons. of sec. 13, 14, 23 and 24.

S. 89° 28' W., bet. secs. 14 and 23.

Over mountainous land; asc. 245 ft. over NE. slope.

11.40 Ridge, bears NW. and SE.; desc. 50 ft. over SW. slope.

28.90 Small ravine, drains S.; asc. 40 ft. over E. slope.

34.40 Spur, slopes S.; desc. 75 ft. over W. slope.

40.02 Point for the ¼ sec. cor. of secs. 14 and 23, at proportionate distance; there is no remaining evidence of original corner.

Set an iron post 30 ins. long, 2½ ins. diam., 10 ins. in the ground, to bedrock, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T32S R5W

¼	S14
	S23

1965

Desc. 100 ft. over W. slope.

45.00 Small draw, drains S.; asc. 100 ft. over E. slope.

50.40 Spur, slopes S.; desc. 105 ft. over W. slope.

56.30 Draw, drains SE.; asc. 205 ft. over NE. slope.

Dependent Resurvey, Portion of the Subdivision, T. 32 S., R. 5 W.

CHAINS	
80.04	<p>The cor. of secs. 14, 15, 22 and 23.</p> <p>Land, mountainous. Soil, rocky mountain gravel. Timber, scattered juniper and pinon. Undergrowth, sagebrush.</p>
	<p>N. 3° 18' E., bet. secs. 14 and 15.</p>
	<p>Over mountainous land covered with juniper and pinon; asc. 35 ft. over SW. slope.</p>
2.20	<p>Ridge, bears SE. and NW.; desc. 50 ft. over NE. slope.</p>
5.10	<p>Small draw, drains E.; asc. 45 ft. over SE. slope.</p>
12.00	<p>Spur, slopes E.; desc. 60 ft. over N. slope.</p>
20.70	<p>Draw, drains E.; asc. 160 ft. over S. slope.</p>
38.00	<p>Spur, slopes SE.; desc. 80 ft. over NE. slope.</p>
40.40	<p>The $\frac{1}{4}$ sec. cor. of secs. 14 and 15, monumented with a volcanic stone, 8x12x14 ins., plainly mkd. $\frac{1}{2}$.</p>
	<p>from which</p>
	<p>A pine, 6 ins. diam., bears S. 45° W., 44 lks. dist., mkd. $\frac{1}{2}$ S BT.</p>
	<p>A pine, 12 ins. diam., bears N. 5° W., 80 lks. dist., mkd. $\frac{1}{2}$ S BT.</p>
	<p>At the corner point</p>
	<p>Set an iron post 30 ins. long, 2$\frac{1}{2}$ ins. diam., 8 ins. in the ground, to bedrock, in a mound of stone, 4 ft. base to top, with brass cap mkd.</p>
	<p>T32S R5W $\frac{1}{4}$ S15 S14 1965</p>
	<p>Place original stone beside iron post.</p>
	<p>N. 1° 41' W., beginning new measurement.</p>
	<p>Desc. 45 ft. over NE. slope.</p>
4.00	<p>Wash in bottom of draw, drains E.; asc. 125 ft. over S. slope.</p>
13.10	<p>Ridge, bears NW. and SE.; desc. 90 ft. over NE. slope.</p>

Dependent Resurvey, Portion of the Subdivision, T. 32 S., R. 5 W.

CHAINS	
22.90	Small ravine, drains SE.; asc. 115 ft. over SW. slope.
29.20	Spur, slopes E.; desc. 40 ft. over NE. slope.
33.50	Small ravine, drains SE.; asc. 70 ft. over SW. slope.
40.04	<p>The cor. of secs. 10, 11, 14 and 15, monumented with an iron post 2½ ins. diam., set, mkd. and witnessed as recorded in the resurvey of a portion of the Tp., in 1960. This cor. is remarked to function as the corner of secs. 14 and 15 only, as hereinafter described.</p> <p>Land, mountainous. Soil, rocky mountain gravel. Timber, juniper and pinon. Undergrowth, sagebrush.</p>
39.33	<p>Retracement of the Resurvey Executed by W. H. Sylvester, Cadastral Surveyor, in 1960</p> <p>From the cor. of secs. 11, 12, 13 and 14, previously described.</p> <p>N. 89° 30' W., bet. secs. 11 and 14.</p> <p>The topography being substantially the same as recorded in the resurvey in 1960, is not entered in this retracement.</p> <p>Point selected for the witness ¼ sec. cor. of sec. 11, hereinafter described.</p>
40.03	True point for the S. ¼ sec. cor. of sec. 11, herein after described.
40.56	True point for the ¼ sec. cor. of sec. 14, at record distance from its witness cor.
41.26	The original witness ¼ sec. cor. of secs. 11 and 14 now functions for sec. 14 only as hereinafter described.
80.91	The original cor. of secs. 10, 11, 14 and 15, now functions for secs. 14 and 15 only as hereinafter described.
	<p>Reestablishment of the Survey Executed by T. C. Bailey and J. G. Burrill, Deputy Surveyors, in 1874</p> <p>From the cor. of secs. 3, 4, 33 and 34, on the S. bdy. of the Tp.</p> <p>N. 1° 20' E., bet. secs. 33 and 34.</p>

Dependent Resurvey, Portion of the Subdivision, T. 32 S., R. 5 W.

CHAINS

- Over hilly brush covered land; asc. 30 ft. over S. slope.
- 3.30 Unimproved road, bears NW. and SE., also low spur, slopes SE.; desc. 40 ft. along E. slope.
- 11.50 Wash in small ravine, drains SE.; asc. 115 ft. over S. slope.
- 38.41 The E. $\frac{1}{4}$ sec. cor. of sec. 33, hereinafter described.
- 38.70 Spur, slopes E.; desc. 35 ft. over N. slope.
- 40.79 The $\frac{1}{4}$ sec. cor. of secs. 33 and 34, monumented with a lava stone, 8x10x12 ins., plainly mkd. $\frac{1}{2}$. This cor. will now function as the W. $\frac{1}{4}$ sec. cor. of sec. 34 only.

At the corner point

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T32S R5W

$\frac{1}{2}$
S34

1965

Bury original stone beside iron post.

Raised mound of stone 3 ft. base, 2 ft. high, W. of corner.

N. $0^{\circ} 21'$ W., beginning new measurement.

Desc. 50 ft. over N. slope.

- 14.00 Wash in ravine, drains SE.; asc. 210 ft. over S. slope.
- 37.62 The closing cor. of secs. 28 and 33, hereinafter described.
- 39.72 The cor. of secs. 27, 28, 33 and 34, monumented with a granite stone, 8x12x16 ins., plainly mkd. 1 notch on S. and 3 notches on E. face. This cor. will now function as the cor. of secs. 27 and 34 only.

from which

A pinon, 10 ins. diam., bears N. 86° E., 64 lks. dist., mkd. S27 BT.

A dead cedar, 12 ins. diam., bears S. 75° E., 60 lks. dist., mkd. T32S R5W S34 BT.

A cedar, 10 ins. diam., bears S. 26° W., 46 lks. dist., mkd. S33 BT. These mks. were obliterated.

A cedar, 12 ins. diam., bears N. 19° W., 74 lks. dist., mkd. S28 BT. These mks. were obliterated.

Dependent Resurvey, Portion of the Subdivision, T. 32 S., R. 5 W.

CHAINS

At the corner point

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T32S R5W

S28 | S27
 | S34

1965

Bury original stone W. of iron post.

Raised mound of stone 3 ft. base, $2\frac{1}{2}$ ft. high, W. of corner.

Land, broken.

Soil, rocky mountain gravel.

Timber, scattered juniper and pinon.

Undergrowth, sagebrush.

From the cor. of secs. 26, 27, 34 and 35.

S. $88^{\circ} 08'$ W., bet. secs. 27 and 34.

Over hilly brush covered land; asc. 125 ft. over general SE. slope.

24.17 Powerline, bears N. $42^{\circ} 50'$ E. and S. $42^{\circ} 50'$ W.

30.40 Wash, 3 ft. deep, 1 ch. wide, drains SE.

40.72 The $\frac{1}{2}$ sec. cor. of secs. 27 and 34, monumented with a sandstone, 8x12x14 ins., plainly mkd. $\frac{1}{2}$.

At the corner point

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground, in a collar of stone, with brass cap mkd.

T32S R5W

$\frac{1}{2}$ | S27
 | S34

1965

Bury original stone beside iron post.

S. $89^{\circ} 21'$ W., beginning new measurement.

Asc. 130 ft. over general SE. slope.

20.40 Low spur, slopes SE.; asc. 55 ft. over SE. slope.

39.50 Spur, slopes SE.; thence along S. slope.

39.88 The cor. of secs. 27 and 34, previously described.

Land, broken.

Soil, rocky mountain gravel.

Timber, scattered juniper and pinon on W. portion.

Undergrowth, sagebrush.

Dependent Resurvey, Portion of the Subdivision, T. 32 S., R. 5 W.

CHAINS	
	N. 0° 14' W., bet. secs. 27 and 28.
	Over mountain land covered with juniper and pinon; asc. 40 ft. over S. slope of ridge.
7.00	Ridge, bears NW. and SE.; desc. 265 ft. over NE. slope.
31.60	Ravine, drains SE.; asc. 140 ft. over S. slope.
38.09	The E. $\frac{1}{4}$ sec. cor. of sec. 28, hereinafter described.
38.97	The $\frac{1}{4}$ sec. cor. of secs. 27 and 28, monumented with a sandstone, 6x10x14 ins., plainly mkd. $\frac{1}{4}$. This cor. will now function as the W. $\frac{1}{4}$ sec. cor. of sec. 27 only.
	from which
	A pinon, 14 ins. diam., bears N. 5° E., 20 lks. dist., mkd. $\frac{1}{4}$ S BT.
	A pinon, 12 ins. diam., bears S. 77° E., 40 lks. dist., mkd. $\frac{1}{4}$ S BT.
	At the corner point
	Set an iron post 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 16 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.
	T32S R5W S27 1965
	Bury original stone beside iron post.

	N. 0° 22' E., beginning new measurement.
	Asc. 120 ft. over S. slope.
8.00	Ridge, bears NW. and SE.; desc. 70 ft. over NE. slope.
18.90	Ravine, drains SE.; asc. 130 ft. over S. slope.
30.50	Ridge, bears NW. and SE.; desc. 80 ft. over N. slope.
38.90	Draw, drains E.; asc. 10 ft. over S. slope.
39.31	The cor. of secs. 21, 22, 27 and 28, monumented with a sandstone, 8x8x14 ins., plainly mkd. 2 notches on S. and 3 notches on E. face.
	from which
	A cedar, 10 ins. diam., bears N. 18° E., 98 lks. dist., mkd. T32S R5W S22 BT.

Dependent Resurvey, Portion of the Subdivision, T. 32 S., R. 5 W.

CHAINS

A pinon, 12 ins. diam., bears S. $74\frac{1}{2}^{\circ}$ E., 150 lks. dist., mkd. S27 BT.

A pinon, 10 ins. diam., bears S. $72\frac{1}{2}^{\circ}$ W., 60 lks. dist., mkd. S28 BT.

At the corner point

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T32S R5W

S21|S22
S28|S27

1965

Bury original stone beside iron post.

Raised mound of stone 3 ft. base, 2 ft. high, W. of corner.

Land, mountainous.
Soil, rocky mountain gravel.
Timber, juniper and pinon.
Undergrowth, sagebrush.

From the cor. of secs. 22, 23, 26 and 27.

S. 85° 20' W., bet. secs. 22 and 27.

Over low hills covered with brush; asc. 45 ft. over E. slope.

2.90 Low spur, slopes SE.; asc. 20 ft. over general SE. slope.

12.30 Spur, slopes S.; desc. 40 ft. over W. slope.

14.60 Wash in small hollow, drains S.; asc. 125 ft. over E. slope.

28.50 Spur, slopes S.; desc. 40 ft. over SW. slope. Enter scattered timber.

29.95 Graded dirt road, Dog Valley to U. S. Highway No. 89, bears NW. and SE.

35.50 Small draw, drains SE.; asc. 70 ft. over NE. slope.

41.58 The $\frac{1}{2}$ sec. cor. of secs. 22 and 27, monumented with a granite stone, 12x14x20 ins., plainly mkd. $\frac{1}{2}$.

from which

A pinon, 14 ins. diam., bears S. 44° E., 35 lks. dist., mkd. $\frac{1}{2}$ S BT.

A pinon, 10 ins. diam., bears N. 36° W., 20 lks. dist., mkd. $\frac{1}{2}$ S BT.

At the corner point

Dependent Resurvey, Portion of the Subdivision, T. 32 S., R. 5 W.

CHAINS

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 22 ins. in the ground, in a collar of stone, with brass cap mkd.

T32S R5W

$\frac{1}{4}$ $\frac{S22}{S27}$

1965

Bury original stone beside iron post.

S. $89^{\circ} 14'$ W., beginning new measurement.

Asc. 120 ft. over NE. slope.

11.00 Ridge, bears NW. and SE.; desc. 90 ft. along gradual S. slope.

39.20 Wash, 20 lks. wide, 2 ft. deep, drains SE.; asc. 15 ft. over NE. slope.

39.55 The cor. of secs. 21, 22, 27 and 28.

Land, broken.

Soil, rocky mountain gravel.

Timber, juniper and pinon on W. portion.

Undergrowth, sagebrush.

N. $0^{\circ} 07'$ E., bet. secs. 21 and 22.

Over mountainous land, covered with pinon and juniper; asc. 60 ft. over S. slope.

0.40 Wash, 20 lks. wide, 2 ft. deep, drains SE.; asc. 60 ft. over a S. slope.

6.30 Low spur, slopes SE.; desc. 45 ft. over N. slope.

8.60 Wash in small draw, drains S. 80° E.; asc. 95 ft. over S. slope.

13.10 Slope changes; asc. 60 ft. along gentle E. slope, on mountain top.

26.70 Graded dirt road, Dog Valley to U. S. Highway No. 89, bears S. 60° E. and N. 60° W.

39.76 The $\frac{1}{4}$ sec. cor. of secs. 21 and 22, monumented with a sandstone, 8x14x16 ins., plainly mkd. $\frac{1}{4}$.

from which

A juniper, 10 ins. diam., bears N. 74° W., 24 lks. dist., mkd. $\frac{1}{4}$ S BT.

A juniper stump, bears west, 19 lks. dist.

At the corner point

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins. in the ground, in a collar of stone, with brass cap mkd.

Dependent Resurvey, Portion of the Subdivision, T. 32 S., R. 5 W.

CHAIN

T32S R5W

 $\frac{1}{4}$

S21 | S22

1964

Bury original stone beside iron post.

N. 1° 34' E., beginning new measurement.

Asc. 30 ft. along gentle E. slope.

- 9.00 Small draw, drains E.; asc. 35 ft. along E. slope.
- 24.50 Small draw, drains E.; asc. 30 ft. along gentle E. slope.
- 42.50 Small draw, drains E. 4 chs. dist. to main draw; thence SE., desc. 5 ft. along E. slope.
- 45.07 The cor. of secs. 15, 16, 21 and 22, monumented with an iron post, 2½ ins. diam., set, mkd. and witnessed as recorded in the resurvey of a portion of the Tp., in 1960.

Land, mountainous.
Soil, rocky gravel.
Timber, juniper and pinon.
Undergrowth, sagebrush.

From the cor. of secs. 14, 15, 22 and 23.

N. 89° 19' W., bet. secs. 15 and 22.

Over mountainous land covered with juniper and pinon;
asc. 210 ft. over general SE. slope.

- 8.00 Small ravine, drains SE.
- 39.00 Small ravine, drains SE.
- 40.11 Point for the $\frac{1}{4}$ sec. cor. of secs. 15 and 22, at proportionate distance; there is no remaining evidence of original corner.

Set an iron post 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T32S R5W

 $\frac{1}{4}$ $\frac{S15}{S22}$

1965

from which

A pinon, 8 ins. diam., bears S. 40° E., 25 lks. dist. mkd. $\frac{1}{4}$ S22 BT.

A pinon, 12 ins. diam., bears N. 16° W., 61 lks. dist., mkd. $\frac{1}{4}$ S15 BT.

Dependent Resurvey, Portion of the Subdivision, T. 32 S., R. 5 W.

CHAINS

Raised mound of stone 3 ft. base, $2\frac{1}{2}$ ft. high, N. of corner.

Asc. 170 ft. along irregular S. slope.

75.40 Ravine, drains SE.; asc. 40 ft. over E. slope.

80.22 The cor. of secs. 15, 16, 21 and 22.

Land, broken.

Soil, rocky mountain gravel.

Timber, pinon and juniper.

Undergrowth, sagebrush.

Survey of a Portion of the Subdivisional Lines
of T. 32 S., R. 5 W.

From the cor. of secs. 1, 2, 11 and 12, monumented with an iron post, $2\frac{1}{2}$ ins. diam., set, mkd. and witnessed as recorded in the survey of a portion of the Tp., in 1960.

East, bet. secs. 1 and 12.

Over mountainous land covered with scattered juniper and pinon; desc. 40 ft. over E. slope.

3.90 Small ravine, drains SE.; asc. 40 ft. over W. slope.

8.00 Spur, slopes SE.; desc. 250 ft. over steep and ledgy E. slope.

22.30 Small canyon, drains SE.; asc. 90 ft. over SW. slope.

31.50 Small spur, slopes S.; desc. 40 ft. over SE. slope.

36.20 Small ravine, drains SW.; asc. gentle SW. slope, in pass.

40.16 Point for the $\frac{1}{2}$ sec. cor. of secs. 1 and 12, at midpoint.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 22 ins. in the ground, in a collar of stone, with brass cap mkd.

T32S R5W

$\frac{1}{2}$ $\frac{S1}{S12}$

1965

Cor. is located on brushy flat in pass.

47.40 Crest of ascent in pass; desc. along broken N. slope of mountain over series of gulches draining N. about 7 chs. to canyon, thence E. in main canyon.

Portion of the Subdivision, T. 32 S., R. 5 W.

CHAINS

- 55.60 Slope changes; desc. 80 ft. over E. slope.
- 75.20 Small ravine, drains SE.; asc. 75 ft. over W. slope.
- 78.30 Low spur, slopes SE.; desc. 65 ft. over NE. slope.
- 80.32 Intersect the E. bdy. of the Tp.

Point for the closing cor. of secs. 1 and 12.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground, in a collar of stone, with brass cap mkd.

T32S
R5W R4 $\frac{1}{2}$ W
C S1 | S7
C S12 |
1965

From this closing cor., the cor. of secs. 6 and 7, T. 32 S., R. 4 $\frac{1}{2}$ W., bears N. $1^{\circ} 16'$ E., 4.02 chs. dist., previously described.

Land, mountainous.
Soil, rocky mountain gravel.
Timber, juniper and pinon.
Undergrowth, sagebrush.

Point for the E. $\frac{1}{4}$ sec. cor. of sec. 12, on the E. bdy. of the Tp., and at 40.00 chs. of southing from the closing cor. of secs. 1 and 12, T. 32 S., R. 5 W.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, in a collar of stone, with brass cap mkd.

T32S
R5W
 $\frac{1}{4}$ |
S12 |
1965

From this cor., the W. $\frac{1}{4}$ sec. cor. of sec. 7, T. 32 S., R. 4 $\frac{1}{2}$ W., bears N. $0^{\circ} 41'$ E., 3.21 chs. dist., previously described.

Point for the E. $\frac{1}{4}$ sec. cor. of sec. 1, on the E. bdy. of the Tp., and at 40.00 chs. of northing from the closing cor. of secs. 1 and 12, T. 32 S., R. 5 W.

Portion of the Subdivision, T. 32 S., R. 5 W.

CHAINS

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T32S

R5W

 $\frac{1}{4}$

S1

1965

From this cor., the W. $\frac{1}{4}$ sec. cor. of sec. 6, T. 32 S., R. $4\frac{1}{2}$ W., bears N. 3.87 chs. dist., previously described.

From the cor. of secs. 2, 3, 10 and 11, monumented with an iron post, $2\frac{1}{2}$ ins. diam., set, mkd. and witnessed as described in the survey of a portion of the Tp., in 1960.

S. $0^{\circ} 01' E.$, bet. secs. 10 and 11.

Over mountainous land covered with juniper and pinon, along E. slope.

1.70 Spur, slopes SE., desc. 420 ft. over steep and ledgy SE. slope into canyon.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 10 and 11.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T32S R5W

 $\frac{1}{4}$

S10 | S11

1965

Desc. 40 ft. over SE. slope.

44.20 Wash in bottom of canyon, drains SE., small stream of water in canyon; asc. 200 ft. over NE. slope.

68.00 S. rim of canyon, bears NW. and SE.; asc. 20 ft. over gentle N. slope on mountain top.

Portion of the Subdivision, T. 32 S., R. 5 W.

CHAINS

79.17 Intersect the N. bdy. of sec. 14.

Point for the closing cor. of secs. 10 and 11.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, in a collar of stone, with brass cap mkd.

T32S R5W

C|C

S10|S11

S14

1965

From this closing cor., the cor. of secs. 10, 11, 14 and 15, bears N. $89^{\circ} 30' W.$, 0.85 chs. dist., previously described. This cor. will now function as the cor. of secs. 14 and 15 only, and was remkd.

T32S R5W

S10

S15|S14

1960

65

Land, broken.

Soil, rocky mountain gravel.

Timber, juniper and pinon.

Undergrowth, sagebrush.

Point for the S. $\frac{1}{4}$ sec. cor. of sec. 11, on the N. bdy. of sec. 14, and midpoint bet. the cor. of secs. 11, 12, 13 and 14, and the closing cor. of secs. 10 and 11, falls in wash and cannot be perpetuated.

The point selected for the witness S. $\frac{1}{4}$ sec. cor. of sec. 11, bears S. $89^{\circ} 30' E.$, 0.70 chs. dist.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, in a collar of stone, with brass cap mkd.

T32S R5W

W $\frac{1}{4}$ S11
C ←

1965

From the true point for this cor. the true point for the $\frac{1}{4}$ sec. cor. of secs. 11 and 14, bears N. $89^{\circ} 30' W.$, 0.53 chs. dist., from which its witness cor. bears N. $89^{\circ} 30' W.$, 0.70 chs. dist., monumented with an iron post $2\frac{1}{2}$ ins. diam., set, mkd. and witnessed as described in the re-survey of a portion of the Tp., in 1960. This witness cor. will now function for the N. $\frac{1}{4}$ sec. cor. of sec. 14 only, and was remkd.

T32S R5W

→
S14 C

1960

65

Portion of the Subdivision, T. 32 S., R. 5 W.

CHAINS

From the cor. of secs. 2, 3, 10 and 11.

West, bet. secs. 3 and 10, on a sectional correction line.

Over mountainous land covered with juniper and pinon; asc. 75 ft. over E. slope.

16.00 Ridge, bears N. and S.; desc. 90 ft. over W. slope.

22.50 Small draw, drains S.; asc. 90 ft. over E. slope.

30.00 Spur, slopes S.; desc. 100 ft. over W. slope.

40.00 Point for the $\frac{1}{2}$ sec. cor. of secs. 3 and 10.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 8 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T32S R5W

$\frac{1}{2}$ $\frac{S3}{S10}$

1965

Desc. 25 ft. over W. slope.

41.60 Small draw, drains SE.; asc. 155 ft. over E. slope.

55.80 Ridge, bears NW. and SE.; desc. 35 ft. over W. slope on top of ridge.

62.40 E. rim of canyon, bears NW. and SE.; desc. 315 ft. over steep SW. slope, into canyon.

80.00 Point for the cor. of secs. 3, 4, 9 and 10.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 8 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T32S R5W

$\frac{S4|S3}{S9|S10}$

1965

Land, mountainous.

Timber, juniper and pinon.

Soil, rocky mountain gravel.

Undergrowth, sagebrush.

S. $0^{\circ} 02'$ E., bet. secs. 9 and 10.

Over mountainous land covered with scattered juniper and pinon; desc. 30 ft. over SW. slope.

2.40 Wash in canyon bottom; drains SE., asc. 215 ft. over NE. slope.

Portion of the Subdivision, T. 32 S., R. 5 W.

CHAINS

- 24.10 Crest of ascent, bears NW. and SE.; desc. 200 ft. over S. slope, on top of brush covered ridge.
- 24.72 Barbed wire fence, bears N. $62^{\circ} 20'$ E. and S. $62^{\circ} 20'$ W.
- 35.60 Small canyon, drains E.; asc. 35 ft. over NW. slope.
- 40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 9 and 10.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 22 ins. in the ground, in a collar of stone, with brass cap mkd.

T32S R5W

$\frac{1}{4}$
S9|S10

1965

Asc. 65 ft. over NW. slope.

- 51.90 Low ridge, bears E. and W.; desc. 40 ft. over gentle S. slope.
- 52.10 Dirt road, bears SW. and NE. irregular.
- 59.20 Small ravine, drains SE.
- 77.92 Intersect the N. bdy. of sec. 15.

Point for the closing cor. of secs. 9 and 10.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T32S R5W

C C

S9|S10

S15

1965

Raised mound of stone 3 ft. base, $2\frac{1}{2}$ ft. high, N. of corner.

From this closing cor., the cor. of secs. 9, 10, 15 and 16, bears N. $89^{\circ} 26'$ W., 1.51 chs. dist. This cor. will now function as the cor. of secs. 15 and 16 only, and was remkd.

T32S R5W

S9
S16|S15

1960

65

Portion of the Subdivision, T. 32 S., R. 5 W.

CHAINS

Point for the S. $\frac{1}{4}$ sec. cor. of sec. 10, on the N. bdy. of sec. 15, and midpoint bet. the closing cor. of secs. 10 and 11, and the closing cor. of secs. 9 and 10.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T32S R5W

$\frac{1}{4}$ S10

1965

Raised mound of stone 3 ft. base, $2\frac{1}{2}$ ft. high, N. of corner.

From this cor., the $\frac{1}{4}$ sec. cor. of secs. 10 and 15, bears N. $89^{\circ} 26'$ W., 1.18 chs. dist., monumented with an iron post $2\frac{1}{2}$ ins. diam., set, mkd. and witnessed as recorded in the resurvey of a portion of the Tp., in 1960. This cor. will now function as the N. $\frac{1}{4}$ sec. cor. of sec. 15 only, and was remkd.

T32S R5W

$\frac{1}{4}$ S15

1960

65

From the cor. of secs. 3, 4, 9 and 10.

N. $0^{\circ} 16'$ W., bet. secs. 3 and 4.

Over mountainous land; asc. 240 ft. over steep SW. slope.

35.70 Spur, slopes SW. from N. irregularly; desc. 25 ft. over N. slope.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 3 and 4.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, in a collar of stone, with brass cap mkd.

T32S R5W

$\frac{1}{4}$
S4|S3

1965

Desc. 70 ft. over N. slope.

50.00 Small draw, drains SW.; asc. 120 ft. over S. slope.

66.00 Ridge, bears E. and W.; desc. 100 ft. over N. slope.

Portion of the Subdivision, T. 32 S., R. 5 W.

CHAINS

83.82

The cor. of secs. 3, 4, 33 and 34, on the N. bdy. of the Tp., monumented with an iron post 3 ins. diam., set, mkd. and witnessed as recorded in the survey of the S. bdy. of T. 31 S., R. 5 W., in 1911.

Land, mountainous.

Soil, mountain gravel.

Timber, scattered juniper and pinon on S. portion.

Undergrowth, sagebrush.

From the cor. of secs. 3, 4, 9 and 10.

West, bet. secs. 4 and 9, on a sectional correction line.

Over mountainous land; desc. 30 ft. over SW. slope.

3.00

Wash in deep canyon, drains SE.; asc. 180 ft. over broken SE. slope.

15.00

Slope changes; thence along a N. slope.

22.00

Slope changes; desc. 50 ft. over a W. slope.

26.00

Wash, drains N.

38.00

Bottom of draw drains NE.; asc. 30 ft. along a SE. slope.

40.00

Point for the $\frac{1}{2}$ sec. cor. of secs. 4 and 9.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 16 ins. in the ground, in a mound of stone, 3 ft. base to top, with brass cap mkd.

T32S R5W

$$\frac{1}{2} \frac{S4}{S9}$$

1965

Asc. 60 ft. over brush covered SE. slope.

49.40

Small ravine, drains SE.; asc. 105 ft. over SE. slope.

53.90

Crest of steep ascent, bears NE. and SW.; asc. 100 ft. over gentle SE. slope on brush covered ridge.

76.90

Crest of ridge, bears NE. and SW., also dirt road along ridge; desc. 15 ft. over NW. slope.

80.00

Point for the cor. of secs. 4 and 9 only, on the E. bdy. of sec. 5.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground, in a collar of stone, with brass cap mkd.

T.32S R5W

$$S5 \frac{S4}{S9}$$

1965

Land, mountainous.

Soil, mountain gravel.

Timber, scattered juniper and pinon on E. portion.

Undergrowth, sagebrush.

Portion of the Subdivision, T. 32 S., R. 5 W.

CHAINS

- S. 0° 02' E., along the W. bdy. of sec. 9.
- Over mountainous land covered with sagebrush; asc. 10 ft. over gentle NW. slope.
- 3.30 Crest of ridge, bears NE. and SW., also dirt road along ridge; desc. 100 ft. over gentle SE. slope.
- 3.76 Point for the cor. of secs. 5 and 8, hereinafter described.
- 17.30 Small wash, drains NE.; asc. 85 ft. over gentle NW. slope.
- 40.00 Point for the W. $\frac{1}{4}$ sec. cor. of sec. 9.
- Set an iron post 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 22 ins. in the ground, in a collar of stone, with brass cap mkd.
- | | |
|------|---------------|
| T32S | R5W |
| | $\frac{1}{4}$ |
| | S9 |
| 1965 | |
- Asc. 15 ft. over gentle NW. slope.
- 43.76 Point for the E. $\frac{1}{4}$ sec. cor. of sec. 8, hereinafter described on page 51.
- 51.50 Low rise, slopes NE.; desc. 40 ft. over gentle SW. slope.
- 69.20 Small ravine, drains NE.; asc. 10 ft. over gentle N. slope.
- 78.20 Intersect the N. bdy. of sec. 16.
- Point for the closing cor. of secs. 8 and 9.
- Set an iron post 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.
- | | |
|------|-----|
| T32S | R5W |
| C | C |
| S8 | S9 |
| S16 | |
| 1965 | |
- A barbed wire fence bears S. 67 lks. dist., fence bears N. 56° 45' E. and S. 56° 45' W., 4.50 chs. dist., thence west.
- Raised mound of stone 3 ft. base, 2 $\frac{1}{2}$ ft. high, N. of corner.
- From this closing cor., the cor. of secs. 8, 9, 16 and 17, bears S. 89° 44' W., 1.65 chs. dist., an iron post 2 $\frac{1}{2}$ in. diam., set, mkd. and witnessed as described in the survey of a portion of the Tp., in 1960. This cor. will now function as the NW. cor. of sec. 16 only, and was remkd.
- | | |
|------|-----|
| T32S | R5W |
| S8 | |
| | S16 |
| 1960 | |
| 65. | |
- from which
- The cor. of secs. 8 and 17 on the west boundary of sec. 16 bears S. 0° 13' W., 5.56 chs. dist. hereinafter described on page 51.

Portion of the Subdivision, T. 32 S., R. 5 W.

CHAINS

Land, mountainous.
Soil, mountain gravel.
Timber, none.
Undergrowth, sagebrush.

Point for the S. $\frac{1}{4}$ sec. cor. of sec. 9, on the N. bdy. of sec. 16, and midpoint bet. the closing cor. of secs. 9 and 10, and the closing cor. of secs. 8 and 9.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T32S R5W

$\frac{1}{4}$ S9

1965

Raised mound of stone 3 ft. base, $2\frac{1}{2}$ ft. high, N. of corner.

From this cor., the $\frac{1}{4}$ sec. cor. of secs. 9 and 16, bears S. $89^{\circ} 44'$ W. 1.58 chs. dist., monumented with an iron post $2\frac{1}{2}$ ins. diam., set, mkd. and witnessed as recorded in the survey of a portion of the Tp., in 1960. This cor. will now function as the N. $\frac{1}{4}$ sec. cor. of sec. 16, and was remkd.

T32S R5W

S16

1960
65

From the cor. of secs. 28, 29, 32 and 33, monumented with an iron post $2\frac{1}{2}$ ins. diam., set, mkd. and witnessed as recorded in the survey of a portion of the Tp., in 1960.

East, bet. secs. 28 and 33.

Over mountainous land covered with pinon and juniper; asc. 140 ft. over SW. slope.

10.00 Spur, slopes S.; desc. 200 ft. over E. slope.

21.60 Draw, drains S.; asc. 120 ft. over general W. slope.

38.50 Low ridge, bears N. and S. irregular; desc. 20 ft. over SE. slope on top of ridge.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 28 and 33.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 12 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.

Portion of the Subdivision, T. 32 S., R. 5 W.

CHAINS

T32S R5W

$$\frac{1}{4} \frac{S28}{S33}$$

1965

Desc. 70 ft. over SE. slope.

43.55 Head of small draw, drains SE.; asc. 30 ft. over SW. slope.

53.20 Spur, slopes SE.; desc. 140 ft. over NE. slope.

70.58 Draw, drains SE.; asc. 30 ft. over SW. slope.

74.30 Slope changes; desc. 30 ft. along gentle S. slope.

81.33 Intersect the W. bdy. of sec. 34.

Point for the closing cor. of secs. 28 and 33.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T32S

R5W

$$\begin{array}{c|c} C & S28 \\ C & S33 \end{array} S34$$

1965

Raised mound of stone 3 ft. base, 3 ft. high, W. of corner.

From this closing cor., the cor. of secs. 27 and 34, bears N. $0^{\circ} 21'$ W., 2.10 chs. dist., previously described.

Land, mountainous.

Soil, rocky mountain gravel.

Timber, pinon and juniper.

Undergrowth, sagebrush.

Point for the E. $\frac{1}{4}$ sec. cor. of sec. 33, on the W. bdy. of sec. 34, and at a position 40.00 chs. southing from the closing cor. of secs. 28 and 33.Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T32S R5W

 $\frac{1}{4}$

S33

1965

Raised mound of stone 3 ft. base, $2\frac{1}{2}$ ft. high, W. of corner.

Portion of the Subdivision, T. 32 S., R. 5 W.

CHAINS	
	<p>From this cor., the W. $\frac{1}{4}$ sec. cor. of sec. 34, bears N. $1^{\circ} 20'$ E., 2.38 chs. dist., previously described.</p>
	<p>Point for the E. $\frac{1}{4}$ sec. cor. of sec. 28, on the W. bdy. of sec. 27, and midpoint bet. the closing cor. of secs. 28 and 33, and the cor. of secs. 21, 22, 27 and 28.</p>
	<p>Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground, in a collar of stone, with brass cap mkd.</p>
	<p style="text-align: center;">T32S R5W $\frac{1}{4}$ S28 1965</p>
	<p>From this cor., the W. $\frac{1}{4}$ sec. cor. of sec. 27, bears N. $0^{\circ} 14'$ W., 0.88 chs. dist., previously described.</p>
	<p>From the cor. of secs. 28, 29, 32 and 33.</p>
	<p>N. $0^{\circ} 03'$ W., bet. secs. 28 and 29.</p>
	<p>Over mountainous land covered with juniper and pinon; asc. 250 ft. over SW. slope.</p>
16.70	<p>Ridge, bears N. 20° W. and S. 20° E.; desc. gentle NE. slope on ridge.</p>
40.00	<p>Point for the $\frac{1}{4}$ sec. cor. of secs. 28 and 29.</p>
	<p>Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;">T32S R5W $\frac{1}{4}$ S29 S28 1965</p>
	<p>Raised mound of stone 3 ft. base, $2\frac{1}{2}$ ft. high, W. of corner.</p>
	<p>from which</p>
	<p>A pinon, 8 ins. diam., bears S. $69\frac{1}{2}^{\circ}$ E., 41 lks. dist., mkd. $\frac{1}{4}$ S BT.</p>
	<p>A pinon, 6 ins. diam., bears W., 17 lks. dist., mkd. $\frac{1}{4}$ S BT.</p>
	<p>Desc. gentle NE. slope on ridge.</p>
41.50	<p>Crest of steeper descent, bears NW. and SE. irregular; desc. 200 ft. over irregular NE. slope.</p>

Portion of the Subdivision, T. 32 S. R. 5 W.

CHAINS

- 80.00 Point for the cor. of secs. 20, 21, 28 and 29.
- Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins. in the ground, in a collar of stone, with brass cap mkd.
- T32 S R5W
- | | |
|------------|------------|
| <u>S20</u> | <u>S21</u> |
| S29 | S28 |
- 1965
- from which
- A pinon, 12 ins. diam., bears N. $31\frac{1}{2}^{\circ}$ E., 8 lks. dist., mkd. T32S R5W S21 BT.
- A pinon, 8 ins. diam., bears S. $10\frac{1}{2}^{\circ}$ E., 40 lks. dist., mkd. T32S R5W S28 BT.
- A juniper, 8 ins. diam., bears S. 63° W., 32 lks. dist., mkd. T32S R5W S29 BT
- Land, mountainous.
Soil, rocky mountain gravel.
Timber, pinon and juniper.
Undergrowth, sagebrush.
-
- From the cor. of secs. 21, 22, 27 and 28.
- S. $89^{\circ} 41'$ W., bet. secs. 21 and 28.
- Over mountainous land covered with pinon and juniper; asc. 70 ft. along S. slope.
- 6.00 Small ravine, drains SE.; asc. 200 ft. over irregular NE. slope.
- 32.50 Crest of flat topped ridge, bears NW. and SE.; desc. 140 ft. over rocky W. slope.
- 38.90 Small canyon, drains S.; asc. 45 ft. over E. slope.
- 41.19 Point for the $\frac{1}{2}$ sec. cor. of secs. 21 and 28, at 40.00 chs. of easting from the cor. of secs. 20, 21, 28 and 29.
- Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.
- T32S R5W
- | | |
|---------------|------------|
| $\frac{1}{2}$ | <u>S21</u> |
| | S28 |
- 1965
- Raised mound of stone 3 ft. base, $2\frac{1}{2}$ ft. high, N. of corner.
- Asc. 120 ft. over E. slope.

Portion of the Subdivision, T. 32 S., R. 5 W.

CHAINS

- 52.60 Rocky ridge, bears NW. and SE.; desc. 280 ft. over broken SW. slope.
- 74.50 Wash in canyon, drains SE.; asc. 40 ft. over E. slope.
- 81.19 The cor. of secs. 20, 21, 28 and 29.

Land, mountainous.
Soil, rocky mountain gravel.
Timber, juniper and pinon.
Undergrowth, sagebrush.

N. 0° 03' W., bet. secs. 20 and 21.

Over mountainous land covered with juniper and pinon; desc. 40 ft. along E. slope.

- 8.50 Wash in canyon, drains SE.; asc. 300 ft. over broken SW. slope.
- 38.30 Crest of black ledge, bears NW. and SE.; asc. 20 ft. over gradual SE. slope.
- 40.00 Point for the $\frac{1}{2}$ sec. cor. of secs. 20 and 21.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 4 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T32S R5W

$\frac{1}{2}$
S20 | S21

1965

from which

A pinon, 10 ins. diam., bears S. $85\frac{1}{2}^\circ$ E., 34 lks. dist., mkd. $\frac{1}{2}$ S21 BT.

A pinon, 18 ins. diam., bears N. $74\frac{1}{2}^\circ$ W., 39 lks. dist., mkd. $\frac{1}{2}$ S20 BT.

Asc. 200 ft. over gradual SE. slope.

- 80.00 Point for the cor. of secs. 17 and 20.
- Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T32S R5W

$\frac{S17}{S20}$ | S21

1965

Set steel fence post, 5 ft. high, beside corner.

Thence bet. secs. 17 and 21.

Portion of the Subdivision, T. 32 S., R. 5 W.

CHAINS

85.56 Point for the NW. cor. of sec. 21.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 22 ins. in the ground, in a collar of stone, with brass cap mkd.

T32S R5W

S21

1965

From this cor., the cor. of secs. 16, 17, 20 and 21, bears E., 2.47 chs. dist., monumented with an iron post $2\frac{1}{2}$ ins. diam., set, mkd. and witnessed as recorded in the survey of a portion of the Tp., in 1960. This cor. will now function as the cor. of secs. 16 and 17 only, and was remkd.

T32S R5W

S17|S16

S21

1960
65

Land, mountainous.
Soil, mountain gravel.
Timber, juniper and pinon.
Undergrowth, sagebrush.

Point for the $N\frac{1}{4}$ sec. cor. of sec. 21, on the S. bdy. of sec. 16, and at 40.00 chs. of easting from the NW. cor. of sec. 21.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T32S R5W

 $\frac{1}{4}$ S21

1965

From this cor., the $\frac{1}{4}$ sec. cor. of secs. 16 and 21, bears E., 2.47 chs. dist., monumented with an iron post $2\frac{1}{2}$ ins. diam., set, mkd. and witnessed as described in the record of the survey of a portion of the Tp., in 1960. This cor. will now function as the $S\frac{1}{4}$ sec. cor. of sec. 16 only, and was remkd.

T32S R5W

 $\frac{1}{4}$ S161960
65

Portion of the Subdivision, T. 32 S., R. 5 W.

CHAINS

Point for the E. $\frac{1}{4}$ sec. cor. of sec. 17, on the W. bdy. of sec. 16, and at 40.00 chs. of northing from the cor. of secs. 17 and 20.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 21 ins. in the ground, in a collar of stone, with brass cap mkd.

T32S R5W

 $\frac{1}{4}$

S17

1965

From this cor., the $\frac{1}{4}$ sec. cor. of secs. 16 and 17, bears N. $0^{\circ} 13' E.$, 5.56 chs. dist., monumented with an iron post $2\frac{1}{2}$ ins. diam., set, mkd. and witnessed as described in the record of the survey of a portion of the Tp., in 1960. This cor. will now function as the W. $\frac{1}{4}$ sec. cor. of sec. 16 only, and was remkd.

T32S R5W

 $\frac{1}{4}$

S16

1960
65

Point for the cor. of secs. 8 and 17, on the W. bdy. of sec. 16, and at 80.00 chs. of northing from the cor. of secs. 17 and 20.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins. in the ground, in a mound of stone, 3 ft. base to top, with brass cap mkd.

T32S R5W

 $\frac{S8}{S17}$

1965

From this cor., the NW. cor. of sec. 16, bears N. $0^{\circ} 13' E.$, 5.56 chs. dist., previously described.

Point for the E. $\frac{1}{4}$ sec. cor. of sec. 8, on the W. bdy. of sec. 9, and at 40.00 chs. of northing from the cor. of secs. 8 and 17.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 22 ins. in the ground, in a collar of stone, with brass cap mkd.

T32S R5W

 $\frac{1}{4}$

S8

1965

Portion of the Subdivision, T. 32 S., R. 5 W.

CHAINS

From this cor., the W. $\frac{1}{2}$ sec. cor. of sec. 9, bears N. $0^{\circ} 02' W.$, 3.76 chs. dist., previously described.

Point for the cor. of secs. 5 and 8, on the W. bdy. of sec. 9, and at 80.00 chs. of northing from the cor. of secs. 8 and 17.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 22 ins. in the ground, in a collar of stone, with brass cap mkd.

T32S R5W

S5	S9
S8	

1965

From this cor., the cor. of secs. 4 and 9, bears N. $0^{\circ} 02' W.$, 3.76 chs. dist., previously described.

From the cor. of secs. 4 and 9, previously described.

N. $0^{\circ} 15' W.$, bet. secs. 4 and 5.

Over mountainous land covered with sagebrush; desc. 100 ft. over NW. slope.

10.10 Small draw, drains E.; asc. 95 ft. over gentle S. slope.

36.24 Point for the E. $\frac{1}{2}$ sec. cor. of sec. 5, at 40.00 chs. of northing from the cor. of secs. 5 and 8.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground, in a collar of stone, with brass cap mkd.

T32S R5 W

$\frac{1}{2}$	
S5	

1965

Asc. gentle S. slope.

40.00 Point for the W. $\frac{1}{2}$ sec. cor. of sec. 4.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 22 ins. in the ground, in a collar of stone, with brass cap mkd.

T32S R5W

$\frac{1}{2}$	
S4	

1965

Cor. falls on small rise; desc. 90 ft. over gentle NE. slope.

Portion of the Subdivision, T. 32 S., R. 5 W.

CHAINS

- 61.70 Small draw, drains NW. into stock pond; asc. 60 ft. over gentle SW. slope.
- 76.24 Point for the N1/16 sec. cor. of sec. 5, at 80.00 chs. of northing from the cor. of secs. 5 and 8.
- Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins. in the ground, in a collar of stone, with brass cap mkd.

T32S R5W

N 1/16 |

S5 |

80

1965

- Cor. is located on small rise; desc. 35 ft. over N. slope.
- 83.81 The cor. of secs. 4, 5, 32 and 33, on the N. bdy. of the Tp., monumented with an iron post, 3 ins. diam., set, mkd. and witnessed as described in the survey of the S. bdy. of T. 31 S., R. 5 W., in 1911.
- Land, rolling mountain top.
Soil, mountain gravel.
Timber, none.
Undergrowth, sagebrush.

From the cor. of secs. 29, 30, 31 and 32, monumented with an iron post $2\frac{1}{2}$ ins. diam., set, mkd. and witnessed as recorded in the survey of a portion of the Tp., in 1960.

N. $89^{\circ} 58'$ W., bet. secs. 30 and 31.

Over mountainous land covered with juniper and pinon; asc. 45 ft. over NE. slope.

- 12.70 Spur, slopes SE.; desc. 70 ft. over W. slope.
- 16.50 Small draw, drains SE.; asc. 90 ft. over E. slope.
- 27.00 Spur, slopes S.; desc. 30 ft. over general S. slope of small draw.
- 40.00 Point for the $\frac{1}{2}$ sec. cor. of secs. 30 and 31.
- Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 15 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T32S R5W

$\frac{1}{2}$ $\frac{S30}{S31}$

1965

Asc. 30 ft. along general S. slope.

Part 2 of the Subdivision, T. 32 S., R. 5 W.

- 11.00 30 ft. along general S. slope.
- 11.01 Small draw, drains SE., asc. 75 ft. over E. slope.
- 11.02 Arroyo, bears N. and S., irregular, desc. 120 ft. over W. slope.
- 11.03 The cor. at secs. 25, 30, 31 and 36, on the W. bdy. of T. 32 S., supported with an iron post 2 1/2 ins. diam., set, set. and witnessed is recorded in the survey of the 1/4 sec. at T. 32 S., R. 5 W., in 1960.
- 11.04
 11.05
 11.06
 11.07
 11.08
 11.09
 11.10
 11.11
 11.12
 11.13
 11.14
 11.15
 11.16
 11.17
 11.18
 11.19
 11.20
 11.21
 11.22
 11.23
 11.24
 11.25
 11.26
 11.27
 11.28
 11.29
 11.30
 11.31
 11.32
 11.33
 11.34
 11.35
 11.36
 11.37
 11.38
 11.39
 11.40
 11.41
 11.42
 11.43
 11.44
 11.45
 11.46
 11.47
 11.48
 11.49
 11.50
 11.51
 11.52
 11.53
 11.54
 11.55
 11.56
 11.57
 11.58
 11.59
 11.60
 11.61
 11.62
 11.63
 11.64
 11.65
 11.66
 11.67
 11.68
 11.69
 11.70
 11.71
 11.72
 11.73
 11.74
 11.75
 11.76
 11.77
 11.78
 11.79
 11.80
 11.81
 11.82
 11.83
 11.84
 11.85
 11.86
 11.87
 11.88
 11.89
 11.90
 11.91
 11.92
 11.93
 11.94
 11.95
 11.96
 11.97
 11.98
 11.99
 12.00

12.01 The cor. at secs. 29, 30, 31 and 32.

12.02 The cor. at secs. 29 and 30.

12.03 The cor. at secs. 29 and 30, covered with juniper and pinon; 30 ft. along general S. slope.

12.04 The cor. at secs. N. 66 - 30' W. and S. 66 - 30' E.

12.05 The cor. at road, bears N. 50' W. and S. 80' E.; desc. 50 ft. over series of small weirs and draws, draining E.

12.06 Arroyo, bears N. and S., irregular, desc. gentle W. slope.

12.07 The cor. at the cor. at secs. 29 and 30.

12.08 The cor. at the cor. at secs. 29 and 30, supported with an iron post 2 1/2 ins. diam., on solid ground, in a mound of stone, 4 ft. base to top, with 1/2 in. gravel.

T. 32 S. R. 5 W.

30, 129

1965

- 12.09 30 ft. along W. slope.
- 12.10 Small draw, drains SW., asc. 190 ft. over S. slope.
- 12.11 Arroyo, bears N. and S., desc. 200 ft. over N. slope.
- 12.12 Small draw, drains N., asc. 60 ft. over S. slope.
- 12.13 The cor. at the cor. at secs. 29, 30, 31 and 32.
- 12.14 The cor. at the cor. at secs. 29 and 30, supported with an iron post 2 1/2 ins. diam., on solid ground, in a mound of stone, 4 ft. base to top, with 1/2 in. gravel.

Portion of the Subdivision, T. 32 S., R. 5 W.

CHAINS

T32S R5W

S19	S20
S30	S29

1965

from which

A pinon, 14 ins. diam., bears S. 70° E., 39 lks. dist., mkd. S29 BT.

A pinon, 12 ins. diam., bears S. 50° W., 54 lks. dist., mkd. S30 BT.

A juniper, 10 ins. diam., bears N. 40° W., 43 lks. dist., mkd. S19 BT.

Land, mountainous.

Soil, rocky mountain gravel.

Timber, juniper and pinon.

Undergrowth, sagebrush.

From the cor. of secs. 20, 21, 28 and 29.

S. 89° 56' W., bet. secs. 20 and 29.

Over mountainous land covered with juniper and pinon; asc. 140 ft. over E. slope.

12.80 Spur, slopes NE.; desc. 105 ft. over NW. slope.

23.30 Small draw, drains NE.; asc. 115 ft. over NE. slope.

31.70 Spur, slopes NE.; asc. 55 ft. over E. slope.

40.04 Point for the $\frac{1}{4}$ sec. cor. of secs. 20 and 29.Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins. in the ground, in a collar of stone, with brass cap mkd.

T32S R5W

$\frac{1}{4}$	S20
	S29

1965

Asc. 40 ft. over E. slope.

47.40 Spur, slopes NE., continue over E. slope. Asc. 100 ft.

65.80 Ridge, bears N. and S. irregularly; desc. 135 ft. over W. slope.

80.08 The cor. of secs. 19, 20, 29 and 30.

Portion of the Subdivision, T. 32 S., R. 5 W.

CHAINS

Land, mountainous.
Soil, mountain gravel.
Timber, juniper and pinon.
Undergrowth, sagebrush.

S. 89° 55' W., bet. secs. 19 and 30.

Over mountainous land covered with juniper and pinon;
desc. 45 ft. over W. slope.

2.90 Small draw, drains SE.; asc. 80 ft. over NE. slope.

8.90 Spur, slopes NE.; desc. 45 ft. over W. slope.

15.60 Small draw, drains NE.; asc. 135 ft. over NE. slope.

30.50 Ridge, bears N. and S. irregularly; desc. gradual NW.
slope.

40.00 Point for the 1/4 sec. cor. of secs. 19 and 30.

Set an iron post 30 ins. long, 2 1/2 ins. diam., 10 ins. in
the ground, in a mound of stone, 4 ft. base to top, with
brass cap mkd.

T32S R5W

1/4 $\frac{S19}{S30}$

1965

Desc. 180 ft. over general NW. slope.

69.28 Power line, bears N. 60° 12' W. and S. 60° 12' E., also
bulldozed road N. of power line.

75.85 The cor. of secs. 19, 24, 25 and 30, on the W. bdy. of
the Tp., monumented with an iron post 2 1/2 ins. diam., set,
mkd. and witnessed as recorded in the survey of the W.
bdy. of T. 32 S., R. 5 W., in 1960.

Land, mountainous.
Soil, mountain gravel.
Timber, juniper and pinon.
Undergrowth, sagebrush.

From the cor. of secs. 19, 20, 29 and 30.

N. 0° 03' W., bet. secs. 19 and 20.

Over mountainous land covered with juniper and pinon;
asc. 160 ft. over S. slope.

15.10 Ridge, bears E. and W.; desc. 60 ft. over N. slope.

Portion of the Subdivision, T. 32 S., R. 5 W.

CHAINS

- 22.20 Small draw, drains NE.; asc. 40 ft. over S. slope.
- 27.00 Small spur, slopes NE.; desc. 25 ft. over N. slope.
- 31.60 Small draw, drains E.; asc. 70 ft. over S. slope.
- 40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 19 and 20.
Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.
- T32S R5W
 $\frac{1}{4}$
S19|S20
1965
- Raised mound of stone 3 ft. base, 3 ft. high, W. of corner.
- Cor. falls on small spur sloping E.; desc. 60 ft. over N. slope.
- 47.30 Small draw, drains E.; asc. 40 ft. over S. slope.
- 51.00 Ridge, bears E. and W. irregularly; desc. 185 ft. over N. slope.
- 63.70 Draw, drains E.; asc. 130 ft. over S. slope.
- 71.30 Spur, slopes E.; desc. 90 ft. over N. slope.
- 80.00 Point for the cor. of secs. 17, 18, 19 and 20.
Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 15 ins. in the ground, in a mound of stone, $3\frac{1}{2}$ ft. base to top, with brass cap mkd.
- T32S R5W
S18|S17
S19|S20
1965
- Land, mountainous.
Soil, gravelly.
Timber, juniper and pinon.
Undergrowth, sagebrush.

From the cor. of secs. 17 and 20 on the west boundary of sec. 21.

S. $89^{\circ} 57'$ W., bet. secs. 17 and 20.

Over mountainous land; asc. 125 ft. over gradual E. slope.

Portion of the Subdivision, T. 32 S., R. 5 W.

CHAINS

40.05 Point for the $\frac{1}{4}$ sec. cor. of sec. 20.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. in diam., on solid rock, in a mound of stone, 4 ft. base to top, with brass cap mkd.

$\frac{1}{4}$
S20
1965

40.10 Point for the $\frac{1}{4}$ sec. cor. of sec. 17 at 40.00 chs. of easting from the cor. of secs. 17, 18, 19 and 20.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., on solid rock, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T32S R5W
 $\frac{1}{4}$ S17
1965

Asc. gentle E. slope.

40.60 Top of ascent on ridge, bears NW. and SE.; desc. 300 ft. over broken SW. slope.

73.00 Wash in canyon, drains SE.; asc. 80 ft. over NE. slope.

80.10 The cor. of secs. 17, 18, 19 and 20.

Land, mountainous.
Soil, rocky and gravelly.
Timber, juniper and pinon.
Undergrowth, sagebrush.

S. $89^{\circ} 53'$ W., bet. secs. 18 and 19.

Over mountainous land covered with juniper and pinon; asc. 380 ft. over broken NE. slope.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 18 and 19.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground, in a mound of stone, 3 ft. base to top, with brass cap mkd.

T32S R5W
 $\frac{1}{4}$ S18
 S19
1965

Asc. 135 ft. over broken NE. slope.

46.70 High spur, slopes NE.; desc. 60 ft. over NW. slope.

52.70 Small draw, drains N.; asc. 140 ft. along N. slope.

63.80 Spur, slopes NE.; desc. 95 ft. over NW. slope.

Portion of the Subdivision, T. 32 S., R. 5 W.

CHAINS

75.80

The cor. of secs. 13, 18, 19 and 24, on the W. bdy. of the Tp., monumented with an iron post, 2½ ins. diam., set, mkd. and witnessed as recorded in the survey of the W. bdy. of T. 32 S., R. 5 W., in 1960.

Land, mountainous.
Soil, rocky mountain gravel.
Timber, juniper and pinon.
Undergrowth, sagebrush.


6.00

From the cor. of secs. 17, 18, 19 and 20.
N. 0° 03' W., bet. secs. 17 and 18.
Over mountainous land covered with juniper and pinon; desc. 60 ft. over NE. slope, in canyon bottom.

Wash in canyon bottom, drains SE.; asc. 450 ft. over steep and ledgy SW. slope.

40.00

Point for the ½ sec. cor. of secs. 17 and 18.
Set an iron post 30 ins. long, 2½ ins. diam., 20 ins. in the ground, in a collar of stone, with brass cap mkd.




Asc. 140 ft. over steep SW. slope.

49.50

Ridge, bears NW. and SE.; desc. 220 ft. over N. slope. Leave timber.

80.00

Point for the cor. of secs. 17 and 18, on the S. bdy. of sec. 7.
Set an iron post 30 ins. long, 2½ ins. diam., 24 ins. in the ground, in a collar of stone, with brass cap mkd.



Land, mountainous.
Soil, mountain gravel.
Timber, juniper and pinon on S. portion.
Undergrowth, sagebrush.

Portion of the Subdivision, T. 32 S., R. 5 W.

CHAINS

- From the cor. of secs. 8 and 17, previously described.
S. 89° 57' W., bet. secs. 8 and 17.
Over rolling mountain top covered with sagebrush.
- 17.00 Crest of rise, bears N. 12° W. and S. 12° E.; desc. 40 ft. over W. slope.
- 25.35 Graded dirt road, bears N. 12° W. and S. 12° E.
- 27.12 Barbed wire fence, bears N. 86° 06' E. and S. 86° 06' W., also E. bank of small stock pond.
- 29.30 W. bank of same stock pond; asc. 50 ft. over E. slope.
- 38.33 Point for the S. $\frac{1}{4}$ sec. cor. of sec. 8, at 40.00 chs. of westing from the closing cor. of secs. 8 and 9.
Set an iron post 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.
T32S R5W
 $\frac{1}{4}$ S8
1965
Raised mound of stone 3 ft. base, 2 $\frac{1}{2}$ ft. high, N. of corner.
Asc. 15 ft. over gentle E. slope.
- 43.25 Point for the N. $\frac{1}{4}$ sec. cor. of sec. 17, at 40.00 chs. of easting from the cor. of secs. 17 and 18.
Set an iron post 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, in a collar of stone, with brass cap mkd.
T32S R5W
 $\frac{1}{4}$ S17
1965
Asc. 15 ft. over gentle E. slope.
- 47.00 Low spur, slopes NE.; desc. 40 ft. over NW. slope.
- 53.70 Small ravine, drains NE.; asc. 130 ft. over E. slope.
- 72.80 Spur, slopes NE., thence along N. slope.
- 78.33 Point for the cor. of secs. 7 and 8, at 80.00 chs. of westing from the closing cor. of secs. 8 and 9.

Portion of the Subdivision, T. 32 S., R. 5 W.

CHAINS

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground, in a collar of stone, with brass cap mkd.

T32S R5W

S7|S8

S17

1965

Continue along N. slope bet. secs. 7 and 17.

83.25 The cor. of secs. 17 and 18.

Land, broken mountain top.
Soil, mountain gravel.
Timber, very scattered juniper and pinon.
Undergrowth, heavy growth of sagebrush.

N. $89^{\circ} 59'$ W., bet. secs. 7 and 18.

Over mountainous land covered with sagebrush; desc. 15 ft. over gentle NW. slope.

23.20 Small ravine, drains NE.; asc. 75 ft. over NE. slope.

35.08 Point for the S. $\frac{1}{4}$ sec. cor. of sec. 7, at 40.00 chs. of westing from the cor. of secs. 7 and 8.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 8 ins. in the ground, in a mound of stone, $3\frac{1}{2}$ ft. base to top, with brass cap mkd.

T32S R5W

$\frac{1}{4}$ S7

1965

Asc. NE. slope.

40.00 Point for the N. $\frac{1}{4}$ sec. cor. of sec. 18.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 5 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T32S R5W

$\frac{1}{4}$ S18

1965

Asc. 120 ft. over NE. slope, through scattered juniper and pinon.

55.50 High spur, slopes NE.; desc. 110 ft. over NW. slope.

Portion of the Subdivision, T. 32 S., R. 5 W.

CHAINS

75.74 The cor. of secs. 7, 12, 13 and 18, on the W. bdy. of the Tp., monumented with an iron post $2\frac{1}{2}$ ins. diam., set, mkd. and witnessed as recorded in the survey of the E. bdy. of T. 32 S., R. $5\frac{1}{2}$ W., in 1960.

Land, mountainous.
Soil, rocky mountain gravel.
Timber, scattered juniper and pinon.
Undergrowth, heavy growth sagebrush.

From the cor. of secs. 7 and 8, on the north boundary of sec. 17.

N. $0^{\circ} 03'$ W., bet. secs. 7 and 8.

Over mountainous land covered with sagebrush; desc. 75 ft. over NE. slope.

7.70 Small draw, drains NE.; asc. 105 ft. over S. slope.

21.60 Spur, slopes NE.; desc. 75 ft. over N. slope.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 7 and 8.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground, in a collar of stone, with brass cap mkd.

T32S R5W

$\frac{1}{4}$
S7 | S8

1965

Desc. 85 ft. over N. slope.

49.80 Small draw, drains NE.; asc. 50 ft. over N. slope.

59.00 Small spur, slopes NE.; desc. 50 ft. over NW. slope.

66.80 Small draw, drains NE.; asc. 85 ft. over SE. slope.

77.60 Spur, slopes NE.; desc. 15 ft. over N. slope.

80.00 Point for the cor. of secs. 5, 6, 7 and 8.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 22 ins. in the ground, in a collar of stone, with brass cap mkd.

T32S R5W

S6 | S5
S7 | S8

1965

Portion of the Subdivision, T. 32 S., R. 5 W.

CHAINS

Land, mountainous.
Soil, rocky mountain gravel.
Timber, very scattered juniper and pinon.
Undergrowth, heavy growth of sagebrush.

From the cor. of secs. 5 and 8, on the west boundary of sec. 9 previously described.

N. 89° 59' W., bet. secs. 5 and 8.

Over rolling mountain top covered with sagebrush; desc. 30 ft. along N. slope.

- 7.40 Unimproved road, bears N. 80° E. and SW.
- 11.30 Slope changes; desc. 65 ft. over gentle W. slope.
- 27.90 Small draw, drains NE.; asc. gentle E. slope.
- 31.45 Graded dirt road, bears N. and S.; asc. 60 ft. over E. slope.
- 40.03 Point for the $\frac{1}{2}$ sec. cor. of secs. 5 and 8.

Set an iron post 30 ins. long, 2½ ins. diam., 22 ins. in the ground, in a collar of stone, with brass cap mkd.

T32S R5W

$\frac{1}{2}$ $\frac{S5}{S8}$

1965

Asc. 15 ft. over E. slope.

- 42.90 Small spur, slopes NE.; desc. 105 ft. over W. slope.
- 56.90 Draw, drains S. from NW.; asc. 95 ft. over NE. slope.
- 80.06 The cor. of secs. 5, 6, 7 and 8.

Land, rolling mountain top.
Soil, rocky mountain gravel.
Timber, none.
Undergrowth, heavy sagebrush.

N. 89° 52' W., bet. secs. 6 and 7.

Over mountainous land covered with sagebrush; asc. 80 ft. over NE. slope.

- 28.20 Spur, slopes N.; desc. 100 ft. over W. slope.
- 40.00 Point for the $\frac{1}{2}$ sec. cor. of secs. 6 and 7.
- Set an iron post 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

Portion of the Subdivision, T. 32 S., R. 5 W.

CHAINS

T32S R5W

$$\frac{1}{4} \frac{S6}{S7}$$

1965

Desc. 90 ft. over W. slope.

- 55.90 Small ravine, drains N.; asc. 50 ft. over gentle E. slope.
- 59.70 A stock pond bears S. 5.60 chs. dist.
- 67.75 Graded dirt road, bears NE. and SW.
- 80.59 The cor. of secs. 1, 6, 7 and 12, on the W. bdy. of the Tp., marked by an iron post $2\frac{1}{2}$ ins. diam., set, mkd. and witnessed as recorded in the survey of the W. bdy. of T. 32 S., R. 5 W., in 1960.
- Land, mountainous.
Soil, rocky mountain gravel.
Timber, very scattered juniper and pinon.
Undergrowth, sagebrush.

From the cor. of secs. 5, 6, 7 and 8.

N. $0^{\circ} 17'$ W., bet. secs. 5 and 6.

Over mountainous land covered with sagebrush; desc. 35 ft. over N. slope.

- 2.90 Small draw, drains E.; asc. 100 ft. over S. slope.
- 18.00 Low ridge, bears NE. and SW.; desc. 120 ft. over N. slope.
- 40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 5 and 6.
- Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground, in a collar of stone, with brass cap mkd.

T32S R5W

$$\frac{1}{4} S6 | S5$$

1965

Desc. 55 ft. over N. slope.

- 44.70 Small draw, drains NE.; asc. 75 ft. over S. slope.
- 57.00 Spur, slopes NE.; desc. 75 ft. over gentle NE. slope.
- 71.80 Slope changes; desc. 100 ft. over N. slope.

Portion of the Subdivision, T. 32 S., R. 5 W.

CHAINS

80.00 Point for the N $\frac{1}{16}$ sec. cor. of secs. 5 and 6.

Set an iron post 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 22 ins. in the ground, in a collar of stone, with brass cap mkd.

T32S R5W

N $\frac{1}{16}$

S6 | S5

80

1965

81.50 Graded dirt road, bears E. and W.

87.46 The cor. of secs. 5, 6, 31 and 32, on the N. bdy. of the Tp., monumented with an iron post 3 ins. diam., set, mkd. and witnessed as recorded in the survey of the S. bdy. of T. 31 S., R. 5 W., in 1911.

Land, mountainous.

Soil, gravelly clay.

Timber, none.

Undergrowth, heavy sagebrush.

Point for the N $\frac{1}{16}$ sec. cor. of secs. 1 and 6, on the W. bdy. of the Tp., at 80.00 chs. of northing from the cor. of secs. 1, 6, 7 and 12.

Set an iron post 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 16 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T32S

R5 $\frac{1}{2}$ W R5W

N $\frac{1}{16}$

S1 | S6

80

1965

From this cor., the closing cor. of T. 32 S., Rs. 5 and 5 $\frac{1}{2}$ W., bears N. 7.02 chs. dist., monumented with an iron post 2 $\frac{1}{2}$ ins. diam., set, mkd. and witnessed as recorded in the survey of the E. bdy. of T. 32 S., R. 5 $\frac{1}{2}$ W., in 1960.

Portion of the Subdivision, T. 32 S. R. 5 W.

CHAINS

General Discription

T. 32 S., R. 5 W. is located about 10 miles north of Panguitch, Utah. The township varies from grass pasture land, along the Sevier River, in the SE. portion of the township, to broken mountain land, covered with pinon and juniper, in the NW. portion of the township. There are many roads within the township, the main one being U. S. Highway No. 89, which enters the township on the S. bdy. of sec. 34, bears NE, and leaves the township on the E. bdy. of sec. 13. The main source of permanent water is the Sevier River, which flows through the SE. portion of the township. The homes of Roy Veater, in the SW. $\frac{1}{4}$ of sec. 35, and Dan Perkins, located in the NW. $\frac{1}{4}$ of sec. 25, are the only places of permanent abode within the township. The elevation of the township varies from about 6,400 to 8,000 ft. above sea level.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS

NAMES	CAPACITY
Jerry L. Thomas	Surveying Technician
Ferrel Reynolds	Surveying Aid
LaVern Griffin	Surveying Aid
Lavere Gleave	Surveying Aid
Phylip Leslie	Surveying Aid

CERTIFICATE OF SURVEY

I, Craig P. Sylvester, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 7th day of August, 1964,

I have dependently resurveyed the East boundary (Panguitch Guide Meridian) a portion of the South boundary and a portion of the subdivisional lines, a retracement of a portion of the North boundary and a portion of the subdivisional lines and the survey of a portion of the subdivisional lines of T. 32 S., R. 5 W.

of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

July 11, 1966 (Date)

Craig P. Sylvester (Cadastral Surveyor)

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

SUBMITTED FOR APPROVAL Date SEP 28 1967

BUREAU OF LAND MANAGEMENT, Washington, D. C.

The foregoing field notes of the East boundary (Panguitch Guide Meridian) a portion of the South boundary and a portion of the subdivisional lines, a retracement of a portion of the North boundary and a portion of the subdivisional lines and the survey of a portion of the subdivisional lines of T. 32 S., R. 5 W., S. L. Mer., Utah.

executed by Craig P. Sylvester, Supervisory Cadastral Surveyor having been critically examined and found correct, are hereby approved.

DEC 21 1967 (Date)

Acting (Chief, Division of Engineering)

CERTIFICATE OF TRANSCRIPT

I CERTIFY That the foregoing transcript of the field notes of the above described surveys in, is a true copy of the original field notes. (Date) (Chief, Division of Engineering)

Blank

Page

Blank

Page

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
ORIGINAL
BUREAU OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD NOTES

OF THE 1968 FEB 7 AM 10 00 .0

SURVEY OF A PORTION

OF

THE SUBDIVISION OF

TOWNSHIP 39 SOUTH, RANGE 7 EAST

Of the SALT LAKE Meridian,

In the State of UTAH

EXECUTED BY

GERALD W. HOCHSTRASSER SUPERVISORY CADASTRAL SURVEYOR

Under special instructions dated OCTOBER 15, 19 64, which provided for the surveys included under Group Number 476, approved OCTOBER 15, 1964, and assignment instructions dated NOVEMBER 2, 19 64.

Survey commenced NOVEMBER 20, 19 64

Survey completed DECEMBER 7, 19 64

INDEX DIAGRAM

Township 39 SOUTH, Range 7 EAST

6	34 5	23 4	8	2	1
33	32	23	18		8
7	31 8	22 9	10	17 11	7 12
31	30		17	16	6
18	29 17	16	15	15 14	5 13
28	28		15	14	5
19	27 20	21 21	22	14 23	4 24
26	25	20	13	12	3
30	24 29	19 28	27	11 26	1 25
24		19	10	10	
31	32	33	34	9 35	36

Survey of a Portion of the Subdivision
of Township 39 South, Range 7 East

CHAINS

The north, south, east and west boundaries and a portion of the subdivisional lines were surveyed by Del Cazier in 1958.

The following field notes are those of a portion of the subdivisional lines of T. 39 S., R. 7 E.

The survey was executed in accordance with the specifications as set forth in the Manual of Survey Instructions, 1947, and the Special Instructions dated October 15, 1964.

Corners on the east-west lines were set on the true latitudinal curve. Lines connecting previously established corners were run by random and true method, but for simplification of the record the random lines are omitted from these field notes.

All lines of this survey were run by direct method where the lines were accessible; lines inaccessible were run by triangulation or traverse methods. Distances to topography on lines run by triangulation and traverses have been thoroughly checked and verified, and in order to simplify the records the diagrams and reductions are omitted from these field notes.

The geographic position of the southeast corner of the township is in Latitude $37^{\circ}22'10.96''$ N. and Longitude $111^{\circ}05'18.73''$ W. as determined in the 1958 survey of the boundaries and a portion of the subdivisional lines of the township.

The magnetic declination was read at a number of stations throughout the township and the average of the readings was found to be $15^{\circ} 15'$ E.

Beginning at the cor. of secs. 25, 26, 35 and 36, which is an iron post, $2\frac{1}{2}$ ins. diam., set, mkd. and witnessed as described in the 1958 survey of a portion of the subdivision of the tp.

N. $0^{\circ} 01'$ W., bet. secs. 25 and 26.

Over rolling and broken desert land through heavy undergrowth of sagebrush.

Survey of a Portion of the Subdivision
of Township 39 South, Range 7 East

CHAINS	
3.30	Trail road, bears N. 45° W. and S. 60° E.
4.30	Begin descent along broken NW. slope, bears NE. and SW.; desc. 150 ft.
40.00	Point for the $\frac{1}{4}$ sec. cor. of secs. 25 and 26.
	Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins. in the ground to solid rock, and in a mound of stone, 4 ft. base, to brass cap mkd.
	<p style="text-align: center;">T39S R7E $\frac{1}{4}$ S26 S25 1964</p>
	Continue along broken NW. slope; desc. 65 ft.
52.40	Top of low spur, projects N. 15° W.
56.30	Hurricane Wash, 40 lks. wide, 5 ft. deep, drains N. 80° E.; asc. 105 ft. over broken SE. slope.
70.90	Wash, 15 lks. wide, 5 ft. deep, drains SE.
79.30	Same wash, drains SW.
80.00	Point for the cor. of secs. 23, 24, 25 and 26.
	Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., on solid sandstone and in a mound of stone, 4 ft. base, to brass cap mkd.
	<p style="text-align: center;">T39S R7E $\frac{1}{4}$ S23 S24 S26 S25 1964</p>
	<p>Land, broken and rolling. Soil, sandy. No timber. Undergrowth, medium to heavy sagebrush.</p>

Survey of a Portion of the Subdivision
of Township 39 South, Range 7 East

CHAINS

From the cor. of secs. 19, 24, 25 and 30 on the E. bdy. of the tp., which is an iron post, 2½ ins. diam., set, mkd. and witnessed as described in the official record.

N. 89° 59' W., bet. secs. 24 and 25.

Over rolling and broken desert land through heavy undergrowth of sagebrush; asc. 65 ft. over E. slope.

- 7.70 Wash, 20 lks. wide, 2 ft. deep, drains SW.
- 16.10 Ridge, bears NE. and SW.; desc. 95 ft. over broken NW. slope.
- 40.05 True point for the ¼ sec. cor. of secs. 24 and 25, falls in Hurricane Wash, 50 lks. wide, 8 ft. deep, drains NE. where the cor. cannot be perpetuated.
- 40.30 Right bank of wash, 8 ft. high, bears NE. and SW.
- 41.05 Point selected for the witness ¼ sec. cor. of secs. 24 and 25.

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground to solid rock and in a mound of stone, 3 ft. base to brass cap mkd.

T39S R7E

WC ¼ $\frac{S24}{S25}$

1964

Raise a mound of stone, 3 ft. base, 2½ ft. high, N. of cor.

Asc. 50 ft. over broken SE. slope.

- 66.60 W. rim of ravine, bears NE. and SW.; thence, desc. gradually along broken S. slope.
- 79.00 Wash, 15 lks. wide, 2 ft. deep, drains SW.
- 80.10 The cor. of secs. 23, 24, 25 and 26, previously described.

Land, broken and rolling.

Soil, sandy.

No timber.

Undergrowth, sagebrush.

Survey of a Portion of the Subdivision
of Township 39 South, Range 7 East

CHAINS

N. 0° 01' W., bet. secs. 23 and 24.

Over gently rolling desert land through medium to heavy undergrowth of sagebrush and greasewood; asc. 90 ft. over SE. slope.

- 5.80 Wash, 15 lks. wide, 2 ft. deep, drains SW.
19.30 Fence, barbed wire, 5 strand, bears S. 80° E. and N. 83° W.
40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 23 and 24.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground with brass cap mkd.

T39S R7E

$\frac{1}{4}$
S23|S24

1964

Raise a mound of stone, $2\frac{1}{2}$ ft. base, 2 ft. high, W. of cor.

Asc. 105 ft. over gentle SE. slope.

- 75.50 Chimney Rock, bears W. 30 lks. dist.
75.80 Sandstone rib, 20 ft. high, projects E. from Chimney Rock; desc. 20 ft. to sec. cor.
80.00 Point for the cor. of secs. 13, 14, 23 and 24.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins. in the ground to solid rock and in a mound of stone, 3 ft. base, to brass cap mkd.

T39S R7E

S14|S13
S23|S24

1964

Raise a mound of stone, 3 ft. base, $2\frac{1}{2}$ ft. high, W. of cor.

Land, gently rolling.

Soil, sandy.

No timber.

Undergrowth, medium to heavy sagebrush and greasewood.

From the cor. of secs. 13, 18, 19 and 24, on the E. bdy. of the tp., which is an iron post, $2\frac{1}{2}$ ins. diam., set, mkd. and witnessed as described in the official record of the 1958 survey.

Survey of a Portion of the Subdivision
of Township 39 South, Range 7 East

CHAINS		
	<p>S. 89° 59' W., bet. secs. 13 and 24.</p> <p>Over broken and rolling land through medium undergrowth of sagebrush and series of sandstone outcroppings; asc. 175 ft. over SE. slope.</p>	
40.04	<p>Point for the $\frac{1}{2}$ sec. cor. of secs. 13 and 24.</p> <p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., on solid sandstone and in a mound of stone, 4 ft. base to brass cap mkd.</p> <p style="text-align: center;">T39S R7E</p> <p style="text-align: center;">$\frac{1}{2}$ $\frac{S13}{S24}$</p> <p style="text-align: center;">1964</p>	
80.08	<p>Thence, over gently rolling SE. slope.</p> <p>The cor. of secs. 13, 14, 23 and 24, previously described.</p> <p>Land, rolling and broken. Soil, sandy. No timber. Undergrowth, medium sagebrush and greasewood.</p>	
22.00	<p>N. 0° 01' W., bet. secs. 13 and 14.</p> <p>Over gently rolling desert land through medium to heavy undergrowth of sagebrush and greasewood; desc. 115 ft. over NW. slope.</p> <p>Slope changes to N.</p>	
39.90	<p>Small sandstone ledge, 4 ft. high, bears NE. and SW.</p>	
40.00	<p>Point for the $\frac{1}{2}$ sec. cor. of secs. 13 and 14.</p> <p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., on solid sandstone and in a mound of stone, 4 ft. base, to brass cap mkd.</p> <p style="text-align: center;">T39S R7E</p> <p style="text-align: center;">$\frac{1}{2}$</p> <p style="text-align: center;">S14 S13</p> <p style="text-align: center;">1964</p>	
67.30	<p>Thence, desc. 140 ft. over broken N. slope.</p> <p>S. rim of ravine, bears E. and W.; desc. 150 ft. to bottom.</p>	

Survey of a Portion of the Subdivision
of Township 39 South, Range 7 East

CHAINS

- 76.40 Bottom of ravine, wash, 40 lks. wide, 3 ft. deep, drains NE.; asc. 40 ft. over broken SE. slope.
- 79.40 Point selected for the witness cor. for the cor. of secs. 11, 12, 13 and 14.
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 12 ins. in the ground to solid rock and in a mound of stone, 3 ft. base, to brass cap mkd.

T39S R7E

S11	S12
S14	S13
↑	
WC	
1964	

- 80.00 True point for the cor. of secs. 11, 12, 13 and 14, falls on solid sandstone slope where the cor. cannot be perpetuated.
- At this point mark a cross (X) in solid stone.
- Land, rolling and broken.
Soil, sandy.
No timber.
Undergrowth, medium sagebrush and greasewood.

From the true point for the cor. of secs. 7, 12, 13 and 18 on the E. bdy. of the tp.; this cor. point is witnessed N., 20 lks. dist., with an iron post, $2\frac{1}{2}$ ins. diam., set, mkd. and witnessed as described in the official record of the 1958 survey.

N. $89^{\circ} 59'$ W., bet. secs. 12 and 13.

Over rough and broken sandstone ledges and outcroppings.

By triangulation.

- 3.50 Approx. dist. to bottom of Coyote Wash, drains NE.; thence along N. rim of Coyote Canyon.
- 38.00 Approx. dist. to Coyote Gulch, drains SE.; thence along S. side of canyon.
- 40.02 True point for the $\frac{1}{2}$ sec. cor. of secs. 12 and 13 falls on a steep and ledgy N. slope where the cor. cannot be perpetuated.
- Asc. along ledgy N. slope.
- 42.64 End of triangulation.

Survey of a Portion of the Subdivision
of Township 39 South, Range 7 East

CHAINS

42.64 Point selected for the witness $\frac{1}{2}$ sec. cor. of secs. 12 and 13.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 4 ins. in the ground to solid rock, and in a mound of stone, 4 ft. base to brass cap mkd.

T39S R7E

$$\frac{1}{2} \frac{S12 \text{ WC}}{S13}$$

1964

Continue along ledgy N. slope.

44.60 Top of ledges, bears E. and W., irregularly.

47.30 Begin descent into Coyote Gulch, bears E. and W., irregularly; desc. 70 ft. along broken N. slope.

64.30 Enter bottom of Coyote Gulch, 2.00 chs. wide, 8 ft. deep, drains E. and W., irregularly.

67.50 Leave wash; asc. 80 ft. over broken SE. slope.

80.04 True point for the cor. of secs. 11, 12, 13 and 14, previously described.

Land, broken.

Soil, mostly bare sandstone; sandy along bottom of canyon.

No timber.

Undergrowth, scattered sagebrush.

N. $0^{\circ} 02'$ E., bet. secs. 11 and 12.

Over rough and broken land.

Asc. 50 ft. over SE. slope.

5.60 Top of sandstone spur, projects E.; desc. 110 ft. over N. slope.

8.90 Bottom of Coyote Gulch, drains E., irregularly; asc. 130 ft. over broken SW. slope.

40.01 Point for the $\frac{1}{2}$ sec. cor. of secs. 11 and 12.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 8 ins. in the ground to solid rock, and in a mound of stone, 4 ft. base, to brass cap mkd.

T39S R7E

$$\frac{1}{2} S11 | S12$$

1964

Survey of a Portion of the Subdivision
of Township 39 South, Range 7 East

CHAINS

Asc. 65 ft. over SW. slope.

42.50 Sandstone rib, projects W.; desc. 95 ft. along W. slope.

55.40 Bottom of ravine; wash, 1.00 ch. wide, 20 ft. deep,
drains SW.; asc. 270 ft. over SE. slope.

80.02 The cor. of secs. 1, 2, 11 and 12, which is an iron
post, 2½ ins. diam., set, mkd. and witnessed as des-
cribed in the official record of the 1958 survey.

Land, broken.

Soil, sandy.

No timber.

Undergrowth, sagebrush and greasewood.

From the cor. of secs. 1, 6, 7 and 12 on the E. bdy. of
the tp., which is an iron post, 2½ ins. diam., set, mkd.
and witnessed as described in the official record.

N. 89° 59' W., bet. secs. 1 and 12.

Over rough and broken land crossing bare sandstone and
numerous sandstone outcroppings.

Desc. 50 ft. over NW. slope.

5.00 Wash in sandstone, 1.00 ch. wide, 15 ft. deep, drains
SW.; asc. 80 ft. over broken SE. slope.

31.60 E. edge of ravine, bears NE. and SW.; desc. 125 ft.
over NW. slope.

38.00 Bottom of ravine, drains SW.; asc. over SE. slope.

40.00 Point for the ¼ sec. cor. of secs. 1 and 12.

Set an iron post, 30 ins. long, 2½ ins. diam., on solid
sandstone and in a mound of stone, 4 ft. base, to brass
cap mkd.

T39S R7E

¼ $\frac{S1}{S12}$

1964

Asc. 125 ft. over broken E. slope.

56.50 Top of broad spur, projects S.; desc. 125 ft. over
broken S. slope.

67.40 Bottom of draw, drains SW.; asc. 100 ft. over SE. slope.

Survey of a Portion of the Subdivision
of Township 39 South, Range 7 East

CHAINS	
80.00	<p>The cor. of secs. 1, 2, 11 and 12.</p> <p>Land, broken and rolling. Soil, bare sandstone; scattered areas of sandy soil along line. No timber. Undergrowth, scattered sagebrush.</p>
	<p>From the cor. of secs. 2, 3, 34 and 35 on the S. bdy. of the tp., which is an iron post, 2½ ins. diam., set, mkd. and witnessed as described in the official record of the 1958 survey.</p>
	<p>N. 0° 01' W., bet. secs. 34 and 35.</p>
	<p>Over rolling desert land through heavy undergrowth of sagebrush and shadscale; desc. 125 ft. over NW. slope.</p>
3.80	<p>Dirt road, bears N. 45° W. and S. 45° E. to Hole in the Rock.</p>
15.80	<p>Wash, 10 lks. wide, 5 ft. deep, drains N., irregularly.</p>
31.10	<p>Bottom of draw; wash, 30 lks. wide, 4 ft. deep, drains NE., irregularly; asc. 55 ft. over SE. slope.</p>
40.00	<p>Point for the ¼ sec. cor. of secs. 34 and 35.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground with brass cap mkd.</p>
	<p style="text-align: center;">T39S R7E $\frac{1}{4}$ S34 S35 1964</p>
	<p>Raise a mound of stone, 3 ft. base, 2½ ft. high, W. of cor.</p>
	<p>Thence, desc. gradually over gently rolling land; desc. 55 ft.</p>
80.00	<p>Point for the cor. of secs. 26, 27, 34 and 35.</p> <p>Set an iron post, 30 ins. long 2½ ins. diam., 24 ins. in the ground with brass cap mkd.</p>
	<p style="text-align: center;">T39S R7E S27 S26 S34 S35 1964</p>
	<p>Raise a mound of stone, 3 ft. base, 2½ ft. high, W. of cor.</p>
	<p>From this cor., the SE. corner of the cabin at Willow Tank, bears N. 66° 39' W., 39.04 chs. dist.</p>

Survey of a Portion of the Subdivision
of Township 39 South, Range 7 East

CHAINS

Land, rolling.
Soil, sandy.
No timber.
Undergrowth, medium to heavy sagebrush, greasewood and
shadscale.

From the cor. of secs. 25, 26, 35 and 36, previously
described.

N. 89° 58' W., bet. secs. 26 and 35.

Over broken and rolling land through medium undergrowth
of sagebrush and greasewood; asc. 20 ft. over E. slope.

- 4.00 Top of ascent, bears NE. and SW.; desc. 135 ft. over
broken W. slope.
- 17.90 Bottom of ravine; wash, 30 lks. wide, 3 ft. deep, drains
N.; asc. 105 ft. over E. slope.
- 21.10 W. rim of ravine, bears N. and S.; desc. 60 ft. over
NW. slope.
- 40.01 Point for the $\frac{1}{4}$ sec. cor. 26 and 35.
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins.
in the ground with brass cap mkd.

T39S R7E

$\frac{1}{4}$ $\frac{S26}{S35}$

1964

Raise a mound of stone, 3 ft. base, $2\frac{1}{2}$ ft. high, N. of
cor.

Desc. 15 ft. over NW. slope.

- 43.30 Bottom of ravine; wash, 30 lks. wide, 4 ft. deep, drains
NE.; asc. 115 ft. over steep SE. slope.
- 55.00 Top of steep ascent, bears NE. and SW.; thence, asc.
gradually.
- 80.02 The cor. of secs. 26, 27, 34 and 35.
- Land, broken and rolling, desert.
Soil, sandy clay.
No timber.
Undergrowth, scant sagebrush, greasewood and grass.

N. 89° 59' W., bet. secs. 27 and 34.

- Over rolling desert land through medium dense undergrowth
- 16.40 Seismograph road, bears SW. and NE.

Survey of a Portion of the Subdivision
of Township 39 South, Range 7 East

CHAINS

- 28.80 Unimproved dirt road, bears N. 45° W., and S. 45° E.
- 31.90 Seismograph road, bears SW. and NE.
- 38.20 Wash, 50 lks. wide, 4 ft. deep, drains NE.
- 39.74 Point selected for the witness $\frac{1}{2}$ sec. cor. of secs. 27 and 34.
Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 10 ins. in the ground to solid rock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.
- T39S R7E
- $\frac{1}{2}$ $\frac{S27}{S34}$
- 1964
- 40.04 True point for the $\frac{1}{2}$ sec. cor. of secs. 27 and 34 falls in a wash, 20 lks. wide, 3 ft. deep, draining NE., where the cor. cannot be perpetuated.
- 40.70 Wash, 1.00 ch. wide, 5 ft. deep, drains NE.
- 52.90 Seismograph road, bears NE. and SW.
- 62.00 Wash, 40 lks. wide, 10 ft. deep, drains NE.
- 80.08 The cor. of secs. 27, 28, 33 and 34, monumented by an iron post, $2\frac{1}{2}$ ins. in diam., set, mkd. and witnessed as described in the official record of the 1958 survey.
- Land, rolling desert.
Soil, sandy clay.
No timber.
Undergrowth, medium dense, shadscale, sagebrush, greasewood, grass and weeds.
-
- From the cor. of secs. 26, 27, 34 and 35, previously described.
- N. 0° 01' W., bet. secs. 26 and 27.
- Over rolling desert land, through dense undergrowth; desc. 120 ft. over a NW. slope.
- 12.90 Wash, 60 lks. wide, 4 ft. deep, drains NE.; thence along a NE. slope.
- 15.04 Seismograph Road bears NE. and SW.
- 35.80 Wash, 20 lks. wide, 4 ft. deep, drains SE.
- 40.00 True point for the $\frac{1}{2}$ sec. cor. of secs. 26 and 27, falls on the steep slope of a sandstone outcropping where the cor. cannot be perpetuated.

Survey of a Portion of the Subdivision
of Township 39 South, Range 7 East

CHAINS

- 40.19 Point selected for the witness $\frac{1}{4}$ sec. cor. of secs. 26 and 27.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., on solid sandstone and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T39S R7E

$\frac{1}{4}$ WC
S27 | S26
↓
1964

- Asc. 140 ft. over a rolling SE. slope.
62.80 Fence, barbed wire, bears N. 40° E. and S. 40° W.
80.00 Point for the cor. of secs. 22, 23, 26 and 27.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins. in the ground, with brass cap mkd.

T39S R7E

S22 | S23
S27 | S26

1964

Raise a mound of stone, 3 ft. base, $2\frac{1}{2}$ ft. high, W. of the cor.

Land, rolling desert.

Soil, sandy clay, with sandstone outcroppings.

No timber.

Undergrowth, medium dense sagebrush, greasewood and shadscale.

From the cor. of secs. 23, 24, 25 and 26, previously described.

N. $89^\circ 58'$ W., bet. secs. 23 and 26.

Over rolling desert land, through medium dense undergrowth; asc. 185 ft. over a SE. slope.

- 4.60 Dozed road, bears irregularly N. and S.
22.70 Top of ascent, bears NE. and SW.; thence over a nearly level plateau.
40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 23 and 26.

Survey of a Portion of the Subdivision
of Township 39 South, Range 7 East

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 22 ins. in the ground, with brass cap mkd.

T39S R7E

$$\frac{1}{4} \frac{S23}{S26}$$

1964

Raise a mound of stone, 2 ft. high, 2 ft. base N. of the cor.

Asc. gradually over a gentle SE. slope.

41.40 Fence, 5 strand, barbed wire, bears N. 62° E. and S. 62° W.

80.00 The cor. of secs. 22, 23, 26 and 27.

Land, rolling desert.

Soil, sandy clay.

No timber.

Undergrowth, medium sagebrush and greasewood.

N. $89^\circ 54'$ W. bet. secs. 22 and 27.

Over gently rolling desert land; asc. 120 ft.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 22 and 27.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins. in the ground, with brass cap mkd.

T39S R7E

$$\frac{1}{4} \frac{S22}{S27}$$

1964

Deposit broken glass, alongside the iron post.

Continue over gently rolling land.

47.00 Dirt road, bears NE. and SW.

80.00 The cor. of secs. 21, 22, 27 and 28, which is an iron post, $2\frac{1}{2}$ ins. in diam., set mkd. and witnessed as described in the official record of the 1958 survey.

Land, gently rolling desert.

Soil, sandy clay.

No timber.

Undergrowth, scattered sagebrush, greasewood, shadscale and grass.

From the cor. of secs. 22, 23, 26 and 27, previously described.

Survey of a Portion of the Subdivision
of Township 39 South, Range 7 East

CHAINS

N. 0° 01' W., bet. secs. 22 and 23.

Over nearly level desert land through medium undergrowth.

40.00 Point for the $\frac{1}{2}$ sec. cor. of secs. 22 and 23.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins. in the ground, with brass cap mkd.

T39S R7E

$\frac{1}{2}$
S22 | S23

1964

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of the cor.

Continue over nearly level desert land.

30.00 Point for the cor. of secs. 14, 15, 22 and 23.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins. in the ground, with brass cap mkd.

T39S R7E

S15 | S14
S22 | S23

1964

Deposit broken glass alongside the iron post.

Land, nearly level desert.

Soil, sandy clay.

No timber.

Undergrowth, scattered sagebrush, greasewood and grass.

From the cor. of secs. 13, 14, 23 and 24.

N. 89° 57' W., bet. secs. 14 and 23.

Over nearly level desert land, through medium dense undergrowth.

40.00 Point for the $\frac{1}{2}$ sec. cor. of secs. 14 and 23.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 16 ins. in the ground, to solid rock, in a mound of stone, 3 ft. high, to top, with brass cap mkd.

T39S R7E

$\frac{1}{2}$ S14
S23

1964

Survey of a Portion of the Subdivision
of Township 39 South, Range 7 East

CHAINS

- Continue over nearly level land.
- 41.90 Dozed road, bears NW. and SE.
- 80.00 The cor. of secs. 14, 15, 22 and 23.
- Land, nearly level and gently rolling desert.
Soil, sandy clay.
No timber.
Undergrowth, medium dense sagebrush and greasewood.
-
- N. 89° 54' W., bet. secs. 15 and 22.
- Over gently rolling desert land through medium dense undergrowth.
- 1.60 Jeep road, bears irregularly NE. and SW.
- 39.95 Point for the $\frac{1}{4}$ sec. cor. of secs. 15 and 22.
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins. in the ground, with brass cap mkd.
- T39S R7E
 $\frac{1}{4}$ $\frac{S15}{S22}$
1964
- Deposit broken glass alongside the iron post.
- Continue over nearly level desert land.
- 79.90 The cor. of secs. 15, 16, 21 and 22, monumented with an iron post, $2\frac{1}{2}$ ins. in diam., set, mkd. and witnessed as described in the official record of the 1958 survey.
- Land, gently rolling desert.
Soil, sandy clay.
No timber.
Undergrowth, scattered sagebrush, greasewood, grass and weeds.
-
- From the cor. of secs. 14, 15, 22 and 23.
- N. 0° 01' W., bet. secs. 14 and 15.
- Over gently rolling desert land, through scattered sagebrush, cacti, grass and weeds.
- 7.00 Jeep road, bears N. 20° E., and S. 20° W.
- 14.20 Seismograph road, bears NW. and SE.

Survey of a Portion of the Subdivision
of Township 39 South, Range 7 East

CHAINS

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 14 and 15.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins. in the ground, with brass cap mkd.

T39S R7E

$\frac{1}{4}$
S15 | S14

1964

Deposit broken glass, alongside the iron post.

Desc. 135 ft. over a gentle N. slope.

80.00 Point for the cor. of secs. 10, 11, 14 and 15.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 16 ins. in the ground to solid rock, in a mound of stone, 3 ft. base to top, with brass cap mkd.

T39S R7E

S10 | S11
S15 | S14

1964

Deposit broken glass alongside the iron post.

Land, nearly level desert.

Soil, sandy clay.

No timber.

Undergrowth, scattered sagebrush, cacti and grass.

From the true point for the cor. of secs. 11, 12, 13 and 14.

N. $89^{\circ} 57'$ W., bet. secs. 11 and 14.

Over rolling desert land, through scattered undergrowth; asc. 200 ft. over a NE. slope.

40.01 Point for the $\frac{1}{4}$ sec. cor. of secs. 11 and 14.

Over a cross (X) cut in solid sandstone, set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., in a mound of stone, 5 ft. base to top, with brass cap mkd.

T39S R7E

$\frac{1}{4}$ S11
S14

1964

Asc. 165 ft. over a rocky NE. slope.

Survey of a Portion of the Subdivision
of Township 39 South, Range 7 East

CHAIN	
80.02	<p>The cor. of secs. 10, 11, 14 and 15.</p> <p>Land, rolling desert. Soil, sandy clay, with exposed and broken sandstone. No timber. Undergrowth, scattered sagebrush, greasewood, grass and weeds.</p>
40.00	<p>N. 89° 54' W., bet. secs. 10 and 15.</p> <p>Over rolling desert land; desc. 135 ft. over a N. changing to NW. slope.</p> <p>Point for the $\frac{1}{2}$ sec. cor. of secs. 10 and 15.</p> <p>Over a cross (X), cut in solid sandstone, set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., in a mound of stone, $4\frac{1}{2}$ ft. base to top, with brass cap mkd.</p> <p style="text-align: center;">T39S R7E</p> <p style="text-align: center;">$\frac{1}{2}$ $\frac{S10}{S15}$</p> <p style="text-align: center;">1964</p> <p>Desc. 40 ft. over a gentle NW. slope.</p>
70.29	<p>Barbed wire fence, bears N. 40° E. and S. 40° W.; desc. 35 ft. over a gentle NW. slope.</p>
80.00	<p>The true point for the cor. of secs. 9, 10, 15 and 16, from which its witness cor. bears N. 0° 02' W., 90 lks. dist., monumented with an iron post, $2\frac{1}{2}$ ins. in diam., set, mkd. and witnessed as described in the official record of the 1958 survey.</p> <p>Land, rolling desert. Soil, sandy clay, with exposed, eroded and broken sandstone. No timber. Undergrowth, scattered sagebrush, greasewood, grass and weeds.</p>
2.70	<p>From the cor. of secs. 10, 11, 14 and 15.</p> <p>N. 0° 01' W., bet. secs. 10 and 11.</p> <p>Over desert land through scattered undergrowth.</p> <p>Enter ledges; desc. 290 ft. over a broken N. slope.</p>

Survey of a Portion of the Subdivision
of Township 39 South, Range 7 East

CHAINS

29.60 Bottom of wash, 1.00 ch. wide, 10 ft. deep, drains irregularly SE.; asc. 90 ft. over a SW. slope.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 10 and 11.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins. in the ground, with brass cap mkd.

T39S R7E

$\frac{1}{4}$
S10 | S11

1964

Raise a mound of stone, $3\frac{1}{2}$ ft. base $2\frac{1}{2}$ ft. high, W. of the cor.

Asc. 35 ft. over a SW. slope.

45.80 Spur, projects E.; desc. 100 ft. over a NE. slope.

52.00 Bottom of Coyote Gulch, 40 lks. wide, 30 ft. deep, drains irregularly E.; thence over rolling land.

80.00 The cor. of secs. 2, 3, 10 and 11, monumented with an iron post, $2\frac{1}{2}$ ins. in diam., set, mkd. and witnessed as described in the official record of the 1958 survey.

Land, rolling and broken desert.

Soil, sandy clay, with a considerable amount of exposed sandstone.

No timber.

Undergrowth, scattered sagebrush, greasewood, grass and weeds.

N. 89° 58' W., bet. secs. 3 and 10.

Over desert land, through scattered undergrowth; desc. 10 ft. over a SW. slope.

4.60 Wash, 1.00 ch. wide, 5 ft. deep, drains S.; desc. 80 ft. over a SW. slope.

15.40 Bottom of Coyote Gulch, 80 lks. wide, 4 ft. deep, drains irregularly SE.; asc. 160 ft. over a NE. slope.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 3 and 10.

Over a cross (X) cut in solid sandstone, set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., in a mound of stone, $4\frac{1}{2}$ ft. base to top, with brass cap mkd.

T39S R7E

$\frac{1}{4}$ $\frac{S3}{S10}$

1964

Asc. 85 ft. over a NE. slope.

58.40 Sandstone, draw, drains N.; asc. 160 ft. over a NE. slope.

Survey of a Portion of the Subdivision
of Township 39 South, Range 7 East

CHAINS		
80.00	<p>The cor. of secs. 3, 4, 9 and 10, monumented with an iron post, 2½ ins. in diam., set, mkd. and witnessed as described in the official record of the 1958 survey.</p> <p>Land, broken desert. Soil, sandy clay, with a considerable amount of exposed and broken sandstone. No timber. Undergrowth, scattered sagebrush; cacti, grass and weeds.</p>	
3.20	<p>From the cor. of secs. 27, 28, 33 and 34, previously described.</p> <p>West, bet. secs. 28 and 33.</p> <p>Over rolling desert land, through scattered undergrowth.</p> <p>Head of wash, drains irregularly NE.; asc. 55 ft. over a NE. slope.</p>	
17.70	<p>Seismograph road, NW. and SE.; asc. 30 ft. over a NE. slope.</p>	
28.27	<p>Barbed wire fence, bears N. 45° E. and S. 45° W.; asc. 20 ft. over a NE. slope.</p>	
39.95	<p>Point for the ½ sec. cor. of secs. 28 and 33.</p> <p>Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T39S R7E</p> <p style="text-align: center;">½ $\frac{S28}{S33}$</p> <p style="text-align: center;">1964</p> <p>Deposit broken glass alongside the iron post.</p> <p>Raise a mound of stone, 3 ft. base, 2½ ft. high, N. of the cor.</p> <p>Thence along a gentle N. slope.</p>	
58.80	<p>Jeep road, bears NE. and SW.</p>	
79.90	<p>The cor. of secs. 28, 29, 32 and 33, monumented with an iron post, 2½ ins. in diam., set, mkd. and witnessed as described in the official record of the 1958 survey.</p> <p>Land, rolling desert. Soil, sandy clay. No timber. Undergrowth, scattered sagebrush; greasewood, grass and weeds.</p>	
	<p>N. 0° 03' W., bet. secs. 28 and 29.</p>	

Survey of a Portion of the Subdivision
of Township 39 South, Range 7 East

CHAINS

Over desert land, through scattered undergrowth; desc.
75 ft. over a NE. slope.

39.20 Unimproved dirt road, bears SE. and NW.

40.00 Point for the $\frac{1}{2}$ sec. cor. of secs. 28 and 29.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins
in the ground, with brass cap mkd.

T39S R7E

$\frac{1}{2}$
S29 | S28

1964

Deposit broken glass around the iron post.

Raise a mound of stone $3\frac{1}{2}$ ft. base, 3 ft. high, W.
of the cor.

Desc. 35 ft. over a gentle NE. slope.

55.60 Wash, 30 fks. wide, 3 ft. deep, drains NE.; thence over
nearly level land.

80.00 Point for the cor. of secs. 20, 21, 28 and 29.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins
in the ground, with brass cap mkd.

T39S R7E

S20 | S21
S29 | S28

1964

Deposit broken glass around the iron post.

Raise a mound of stone, 3 ft. base, 2 ft. high,
W. of the cor.

Land, nearly level desert.

Soil, sandy clay.

No timber.

Undergrowth, scattered sagebrush, cacti, grass and weeds.

From the cor. of secs. 21, 22, 27 and 28, previously
described.

N. $89^{\circ} 57'$ W., bet. secs. 21 and 28.

Over gently rolling desert land, through scant under-
growth; desc. 85 ft. over a gentle SW. slope.

26.50 Bladed dirt road, Escalante to the Hole in the Rock,
bears N. $32^{\circ} 35'$ W., and S. $32^{\circ} 35'$ E.; desc. 50 ft.
over a SW. slope.

39.98 Point for the $\frac{1}{2}$ sec. cor. of secs. 21 and 28.

Survey of a Portion of the Subdivision
of Township 39 South, Range 7 East

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 20 ins. in the ground and in a collar of stone, with brass cap mkd.

T39S R7E

$\frac{1}{4}$ $\frac{S21}{S28}$

1964

Desc. 15 ft. over a gentle SW. slope.

- 60.50 Dozed road, bears irregularly N. and S.
- 74.00 Wash, 40 lks. wide, 4 ft. deep, drains N.; asc. 30 ft. over a NE. slope.
- 79.96 The cor. of secs. 20, 21, 28 and 29.
- Land, gently rolling desert.
Soil, sandy clay.
No timber.
Undergrowth, scattered sagebrush, cacti, grass and weeds.

N. $0^{\circ} 06'$ W., bet. secs. 20 and 21.

Over gently rolling desert land; desc. 65 ft.

- 40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 20 and 21.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 20 ins. in the ground, with brass cap mkd.

T39S R7E

$\frac{1}{4}$
S20 | S21

1964

Raise a mound of stone, 2 ft. base, 2 ft. high, W. of the cor.

- Desc. 45 ft. over a gentle N. slope.
- 53.00 Wash, 10 lks. wide, 2 ft. deep, drains NE.
- 62.90 Wash, 60 lks. wide, 6 ft. deep, drains NE.
- 76.20 Dozed road, bears NW. and SE.

Survey of a Portion of the Subdivision
of Township 39 South, Range 7 East

CHAINS

80.00 The cor. of secs. 16, 17, 20 and 21, monumented with an iron post, 2½ ins. in diam., set, mkd. and witnessed as described in the official record of the 1958 survey.

Land, gently rolling desert.

Soil, sandy, clay.

No timber.

Undergrowth, scattered sagebrush, cacti, grass and weeds.

From the cor. of secs. 8, 9, 16 and 17, monumented with an iron post, 2½ ins. in diam., set, mkd. and witnessed as described in the official record of the 1958 survey.

N. 0° 03' W., bet. secs. 8 and 9.

Over rolling desert land, through scattered undergrowth.

SE. cor. of water trough, bears N. 77° 30' W., 7.74 chs. dist.

- 3.50 Unimproved dirt road, bears NE. and SW.
- 14.90 Wash, 10 lks. wide, 5 ft. deep, drains NE.
- 29.50 Wash, 15 lks. wide, 4 ft. deep, drains SE.
- 40.00 Point for the ½ sec. cor. of secs. 8 and 9.
- Set an iron post, 30 ins. long, 2½ ins. in diam., 10 ins. in the ground, to solid rock, in a mound of stone, 3½ ft. base to top, with brass cap mkd.

T39S R7E

½
S8 | S9

1964

Continue over gently rolling land.

- 52.90 Wash, 15 lks. wide, 5 ft. deep, drains E.
- 80.00 Point for the cor. of secs. 4, 5, 8 and 9.
- Set an iron post, 30 ins. long, 2½ ins. in diam., 20 ins. in the ground, with brass cap mkd.

T39S R7E

S5 | S4
S8 | S9

1964

Raise a mound of stone, 3½ ft. base, 3 ft. high,
W. of the cor.

Survey of a Portion of the Subdivision
of Township 39 South, Range 7 East

CHAINS	
40.07	<p>Land, rolling desert. Soil, sandy clay. No timber. Undergrowth, scattered sagebrush, cacti, grass and weeds.</p> <p>From the cor. of secs. 3, 4, 9 and 10, previously described.</p> <p>S. 89° 53' W., bet. secs. 4 and 9.</p> <p>Over rolling desert land, through scant undergrowth.</p> <p>Point for the $\frac{1}{4}$ sec. cor. of secs. 4 and 9, falls on the steep slope of a small sandstone ledge, where the cor. cannot be perpetuated.</p> <p>Point selected for the witness $\frac{1}{4}$ sec. cor. of secs. 4 and 9.</p> <p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T39S R7E $\frac{1}{4}$ $\xrightarrow{\text{S4 W}}$ S9 C 1964</p> <p>Continue over gently rolling land.</p>
80.14	<p>The cor. of secs. 4, 5, 8 and 9.</p> <p>Land, rolling desert. Soil, sandy clay, with exposed and broken sandstone. No timber. Undergrowth, scattered sagebrush, cacti, grass and weeds.</p> <p>N. 0° 01' E., bet. secs. 4 and 5.</p> <p>Over rolling desert land, through scant undergrowth; asc. 215 ft. over a S. slope.</p> <p>Point for the $\frac{1}{4}$ sec. cor. of secs. 4 and 5.</p> <p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 10 ins. in the ground to solid rock, in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T39S R7E $\frac{1}{4}$ S5 S4 1964</p> <p>Top of rise; desc. 155 ft. over a NE. slope.</p> <p>S. rim, of Coyote Gulch; desc. 210 ft. over a broken NE. slope.</p>
41.00	
66.00	

Survey of a Portion of the Subdivision
of Township 39 South, Range 7 East

CHAINS

80.12 The cor. of secs. 4, 5, 32 and 33, on the N. bdy. of the Tp. monumented with an iron post, $2\frac{1}{2}$ ins. in diam., set, mkd. and witnessed as described in the official record of the 1958 survey.

Land, rolling and broken desert.

Soil, sandy clay, with a considerable amount of exposed and broken sandstone.

No timber.

Undergrowth, scattered sagebrush, greasewood grass and weeds.

From the cor. of secs. 29, 30, 31 and 32, monumented with an iron post, $2\frac{1}{2}$ ins. in diam., set, mkd. and witnessed as described in the official record of the 1958 survey.

West, bet. secs. 30 and 31.

Over desert mountainous land, through scattered timber; asc. 450 ft. over a broken NE. slope.

28.60 Spur, projects N.; desc. 190 ft. over a NW. slope.

39.00 Wash, 20 lks. wide, drains northerly.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 30 and 31.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 6 ins. in the ground, to solid rock, in a mound of stone, $3\frac{1}{2}$ ft. base, to top, with brass cap mkd.

T39S R7E

$\frac{1}{4}$ $\frac{S30}{S31}$

1964

Desc. 100 ft. over a NW. slope.

46.00 Wash, 10 lks. wide, drains northerly.

57.00 Wash, 10 lks. wide, drains northerly.

62.00 Draw, drains NE.; asc. 150 ft. over an E. slope.

72.00 Spur, projects NE.; desc. 100 ft. over a W. slope.

79.46 The cor. of secs. 25, 30, 31 and 36, on the W. bdy. of the Tp. monumented with an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., set, mkd. and witnessed as described in the official record of the 1958 survey.

Land, broken desert mountain.

Soil, rocky clay, with a considerable amount of exposed and broken sandstone.

Timber, scattered juniper and pinon.

Undergrowth, medium sagebrush, greasewood, grass and weeds.

From the cor. of secs. 29, 30, 31 and 32, previously described.

N. $0^{\circ} 03'$ W., bet. secs. 29 and 30.

Over rolling desert land, through medium dense undergrowth; desc. 50 ft. over a NE. slope.

Survey of a Portion of the Subdivision
of Township 39 South, Range 7 East

CHAINS

- 6.30 Wash, 20 lks. wide, 3 ft. deep, drains irregularly E.; desc. 20 ft. over a NE. slope.
- 10.30 Wash, 30 lks. wide, 5 ft. deep, drains irregularly E.
- 19.50 Seismograph road, bears NE. and SW.; thence over nearly level land.
- 30.40 Wash, 30 lks. wide, 5 ft. deep, drains NE.
- 40.00 Point for the $\frac{1}{2}$ sec. cor. of secs. 29 and 30.
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins. in the ground, with brass cap mkd.

T39S R7E

$$\begin{array}{c} \frac{1}{2} \\ \text{S30} | \text{S29} \\ 1964 \end{array}$$

Raise a mound of stone, $3\frac{1}{2}$ ft. base, 3 ft. high, W. of the cor.

Desc. 35 ft. over a gentle NE. slope.

- 65.10 Barbed wire fence, bears N. 30 E., and S. 30 W.
- 73.40 Wash, 40 lks. wide, 4 ft. deep, drains irregularly NE.
- 80.00 Point for the cor. of secs. 19, 20, 29 and 30.
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins. in the ground, with brass cap mkd.

T39S R7E

$$\begin{array}{c} \text{S19} | \text{S20} \\ \text{S30} | \text{S29} \\ 1964 \end{array}$$

Raise a mound of stone, $3\frac{1}{2}$ ft. base, $2\frac{1}{2}$ ft. high, W. of the cor.

Set a steel fence post, alongside the iron post.

Land, gently rolling desert.

Soil, sandy clay.

No timber.

Undergrowth, scattered sagebrush, cacti, grass and weeds.

From the cor. of secs. 20, 21, 28 and 29, previously described.

S. $89^{\circ} 56'$ W., bet. secs. 20 and 29.

Over nearly level desert land, through scant undergrowth.

Survey of a Portion of the Subdivision
of Township 39 South, Range 7 East

CHAINS

- 26.50 Wash, 30 lks. wide, 5 ft. deep, drains NW.
28.20 Wash, 30 lks. wide, 5 ft. deep, drains NE.
34.90 Seismograph road, bears NW. and SE.
40.01 Point for the $\frac{1}{4}$ sec. cor. of secs. 20 and 29.
Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins. in the ground, with brass cap mkd.

T39S R7E

$$\frac{1}{4} \frac{S20}{S29}$$

1964

Raise a mound of stone, 3 ft. base, 2 ft. high N. of the cor.

- Thence over gently rolling land.
61.70 Unimproved dirt road, bears NE. and SW.
71.40 Barbed wire fence, bears N. 30° E., and S. 30° W.
74.60 Wash, 30 lks. wide, 5 ft. deep, drains irregularly NE.
80.02 The cor. of secs. 19, 20, 29 and 30.

Land, gently rolling desert.
Soil, sandy clay.
No timber.
Undergrowth, scattered sagebrush, greasewood, cacti, grass and weeds.

S. $89^{\circ} 55'$ W., bet. secs. 19 and 30.

- Over nearly level desert land, through scant undergrowth.
16.10 Wash, 10 lks. wide, 3 ft. deep, drains N.
24.70 Wash, 20 lks. wide, 3 ft. deep, drains NE.
40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 19 and 30.
Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins. in the ground, with brass cap mkd.

T39S R7E

$$\frac{1}{4} \frac{S19}{S30}$$

1964

Deposit broken glass, around the iron post.

Over rolling land; asc. 30 ft. over a E. slope.

Survey of a Portion of the Subdivision
of Township 39 South, Range 7 East

CHAINS	
52.50	Wash, 30 lks. wide, 3 ft. deep, drains irregularly NE.; asc. 100 ft. over a rocky E. slope.
74.00	Top of low ridge, bears N. and S.; desc. 50 ft. over a W. slope.
79.40	<p>The cor. of secs. 19, 24, 25 and 30, on the W. bdy. of the Tp. monumented with an iron post, 2½ ins. in diam., set, mkd. and witnessed as described in the official record of the 1958 survey.</p> <p>Land, rolling desert. Soil, sandy clay, with broken and exposed sandstone. No timber. Undergrowth, medium sagebrush, greasewood, cacti, grass and weeds.</p>
	From the cor. of secs. 19, 20, 29 and 30.
	N. 0° 03' W., bet. secs. 19 and 20.
	Over rolling desert land, through scattered undergrowth.
9.80	Wash, 40 lks. wide, 4 ft. deep, drains irregularly NE.
40.00	Point for the ½ sec. cor. of secs. 19 and 20.
	Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">T39S R7E</p> <p style="text-align: center;"> $\begin{array}{c} \frac{1}{2} \\ \text{S19} \mid \text{S20} \\ \text{1964} \end{array}$ </p>
	Raise a mound of stone, 3 ft. base, 2 ft. high W. of the cor.
54.00	Jeep road, bears NE. and SW.
76.90	Wash, 30 lks. wide, 3 ft. deep, drains NE.
77.80	Seismograph road, bears NW. and SE.
80.00	Point for the cor. of secs. 17, 18, 19 and 20.
	Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">T39S R7E</p> <p style="text-align: center;"> $\begin{array}{c} \text{S18} \mid \text{S17} \\ \text{S19} \mid \text{S20} \\ \text{1964} \end{array}$ </p>
	Raise a mound of stone, 3½ ft. base, 2½ ft. high, W. of the cor.

Survey of a Portion of the Subdivision
of Township 39 South, Range 7 East

CHAINS

Land, rolling desert.
Soil, sandy clay.
No timber.
Undergrowth, scattered sagebrush, cacti, grass and
weeds.

From the cor. of secs. 16, 17, 20 and 21, previously
described.

West, bet. secs. 17 and 20.

Over rolling desert land, through scattered undergrowth.

6.90 Barbed wire fence, bears S. 44° W., and N. 44° E.

39.98 Point for the $\frac{1}{2}$ sec. cor. of secs. 17 and 20.

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. in diam. 20 ins.
in the ground and in a collar of stone, with brass cap
mkd.

T39S R7E

$\frac{1}{2}$ $\frac{S17}{S20}$

1964

Raise a mound of stone, 3 ft. base, 2 $\frac{1}{2}$ ft. high,
N. of the cor.

Continue over gently rolling land.

49.80 Trail road, bears NE. and SW.

51.30 Trail road, bears NE. and SW.

77.00 Wash, 50 lks. wide, 10 ft. deep, drains N.

79.96 The cor. of secs. 17, 18, 19 and 20.

Land, gently rolling desert.
Soil, sandy clay.
No timber.
Undergrowth, scattered sagebrush, cacti, grass and
weeds.

S. 89° 54' W., bet. secs. 18 and 19.

Over gently rolling desert land, through scant under-
growth.

1.35 Trail road, bears NW. and SE.

11.70 Wash, 1.00 ch. wide, 7 ft. deep, drains NE.

Survey of a Portion of the Subdivision
of Township 39 South, Range 7 East

CHAINS	
30.00	Wash, 60 lks. wide, 6 ft. deep, drains irregularly E.
40.00	Point for the $\frac{1}{4}$ sec. cor. of secs. 18 and 19.
	Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 22 ins. in the ground, with brass cap mkd.
	T39S R7E
	$\frac{1}{4}$ $\frac{S18}{S19}$
	1964
	Set an unmarked rock, 20x10x8 ins. alongside the iron post.
	Continue over gently rolling land.
42.00	Wash, 60 lks. wide, 6 ft. deep, drains NE.
47.80	Top of small rise.
53.20	Top of small rise.
79.25	The cor. of secs. 13, 18, 19 and 24, on the W. bdy. of the Tp. monumented with an iron post, $2\frac{1}{2}$ ins. in diam., set, mkd. and witnessed as described in the official record of the 1958 survey.
	Land, gently rolling desert.
	Soil, sandy clay.
	No timber.
	Undergrowth, scattered sagebrush, greasewood, grass and weeds.
	From the cor. of secs. 17, 18, 19 and 20.
	N. $0^{\circ} 03'$ W., bet. secs. 17 and 18.
	Over rolling desert land, desc. 45 ft. over a N. slope.
14.10	Wash, 30 lks. wide, 5 ft. deep, drains NE.; asc. 40 ft. over a S. slope.
40.00	Point for the $\frac{1}{4}$ sec. cor. of secs. 17 and 18.
	Over a cross (X) cut in solid sandstone, set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., in a mound of stone, $3\frac{1}{2}$ ft. base to top, with brass cap mkd.
	T39S R7E
	$\frac{1}{4}$ $\frac{S18}{S17}$
	1964

Survey of a Portion of the Subdivision
of Township 39 South, Range 7 East

CHAINS

- Asc. 15 ft. over a S. slope.
- 41.60 Top of rise; desc. 65 ft. over a N. slope.
- 71.40 Wash, 40 lks. wide, 3 ft deep, drains E.
- 80.00 Point for the cor. of secs. 7, 8, 17 and 18.
- Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins in the ground, with brass cap mkd.

T39S R7E

S7	S8
S18	S17

1964

Raise a mound of stone, 3½ ft. base, 2 ft. high,
W. of the cor.

Land, rolling desert.
Soil, sandy clay.
No timber.
Undergrowth, scattered sagebrush, greasewood, grass and weeds.

From the cor. of secs. 8, 9, 16 and 17, previously described.

N. 89° 58' W., bet. secs. 8 and 17.

Over rolling desert land, through scant undergrowth.

- 9.80 Wash, 10 lks. wide, 4 ft. deep, drains N.
- 15.35 Unimproved dirt road, bears N. and S.
- 39.96 Point for the ¼ sec. cor. of secs. 8 and 17.
- Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground with brass cap mkd.

T39S R7E

¼	S8
	S17

1964

Raise a mound of stone, 3 ft. base, 2½ ft. high,
N. of cor.

- 40.50 Improved dirt road, bears NW. and SE.

Survey of a Portion of the Subdivision
of Township 39 South, Range 7 East

CHAINS	
53.60	Wash, 40 lks. wide, 5 ft. deep, drains NE.
79.92	The cor. of secs. 7, 8, 17 and 18, previously described.
	<p>Land, rolling. Soil, sandy clay. No timber. Undergrowth, scattered sagebrush and greasewood.</p>
	S. 89° 51' W., bet. secs. 7 and 18.
	Asc. gradually over gently rolling desert land through scattered undergrowth of sagebrush and greasewood.
40.00	Point for the $\frac{1}{4}$ sec. cor. of secs. 7 and 18.
	Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground and in a collar of stone to brass cap mkd.
	<p>T39S R7E $\frac{1}{4} \frac{S7}{S18}$ 1964</p>
41.70	Seismograph road, bears NE. and SW.
63.50	Unimproved dirt road, bears NW. and SE.
79.13	The cor. of secs. 7, 12, 13 and 18 on the W. bdy. of the Tp., monumented with an iron post, $2\frac{1}{2}$ ins. diam., set, mkd. and witnessed as described in the official record of the 1958 survey.
	<p>Land, gently rolling. Soil, sandy clay. No timber. Undergrowth, scattered sagebrush and greasewood.</p>
	From the cor. of secs. 7, 8, 17 and 18, previously described.
	N. 0° 03' W., bet. secs. 7 and 8.
	Over rolling land through scattered undergrowth of sagebrush and greasewood.
28.20	Seismograph road, bears NE. and SW.
32.20	Improved dirt road, bears NW. and SE.
40.00	Point for the $\frac{1}{4}$ sec. cor. of secs. 7 and 8.

Survey of a Portion of the Subdivision
of Townshi 39 South Ran e 7 East

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground with brass cap mkd.

T39S R7E

$$\frac{1}{2}$$

S7	S8
----	----

1964

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Desc. 125 ft. over NW. slope.

67.30 Wash, 1.00 ch. wide, 6 ft. deep, drains NE., irregularly; thence over rolling land.

80.00 Point for the cor. of secs. 5, 6, 7 and 8.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., on solid rock and in a mound of stone, 4 ft. base to brass cap mkd.

T39S R7E

S6	S5
S7	S8

1964

Land, rolling.

Soil, sandy clay.

No timber.

Undergrowth, scattered sagebrush and greasewood.

From the cor. of secs. 4, 5, 8 and 9, previously described.

N. $89^{\circ}53'$ W., bet. secs. 5 and 8.

Over rolling and broken desert land through scattered undergrowth of sagebrush and greasewood.

28.40 Wash, 40 lks. wide, 2 ft. deep, drains S.

39.96 Point for the $\frac{1}{4}$ sec. cor. of secs. 5 and 8.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 8 ins. in the ground to solid rock and in a mound of stone, 4 ft. base, to brass cap mkd.

T39S R7E

$$\frac{1}{4}$$

S5	S8
----	----

1964

Survey of a Portion of the Subdivision
of Township 39 South, Range 7 East

CHAINS	
75.40	Wash in bottom of gully, 1.00 ch. wide, 3 ft. deep, drains SE.
79.92	<p>The cor. of secs. 5, 6, 7 and 8, previously described.</p> <p>Land, rolling. Soil, sandy clay. No timber. Undergrowth, scattered sagebrush and greasewood.</p>
	<p>S. 89° 48' W., bet. secs. 6 and 7.</p> <p>Over rolling desert land through scattered undergrowth of sagebrush and greasewood.</p>
	Asc. 110 ft. over NE. slope.
22.20	Top of ascent; thence over gently rolling land.
39.50	Improved dirt road, bears S. 35° E. and N. 35° W.
40.00	Point for the $\frac{1}{4}$ sec. cor. of secs. 6 and 7.
	Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground with brass cap mkd.
	<p>T39S R7E</p> <p>$\frac{1}{4} \frac{S6}{S7}$</p> <p>1964</p>
	Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.
	Continue over rolling desert land.
53.30	Wash in bottom of draw, 1.00 ch. wide, 7 ft. deep, drains SE.
64.10	Small wash, drains NE.
68.70	Fence, 4 strand, barbed wire, bears N. 30° E. and S. 30° W. 3.00 ch., thence westerly.
79.02	<p>The cor. of secs. 1, 6, 7 and 12 on the W. bdy. of the tp., monumented with an iron post, $2\frac{1}{2}$ ins. diam., set, mkd. and witnessed as described in the official record of the 1958 survey.</p> <p>Land, rolling and broken. Soil, sand clay. No timber. Undergrowth, scattered sagebrush and greasewood.</p>

Survey of a Portion of the Subdivision
of Township 39 South, Range 7 East

CHAINS

From the cor. of secs. 5, 6, 7 and 8, previously described.

N. 0° 02' W., bet. secs. 5 and 6.

Over rolling desert land through scattered undergrowth of sagebrush and greasewood.

- 1.30 Wash, 50 lks. wide, 4 ft. deep, drains E., irregularly; asc. 160 ft. over SW. slope.
- 21.20 Wash in bottom of small draw, 50 lks. wide, 4 ft. deep, drains SW.
- 40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 5 and 6.
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 12 ins. in the ground and in a mound of stone, 3 ft. base, to brass cap mkd.

T39S R7E

$\frac{1}{4}$
S6 | S5
1964

Asc. 150 ft., continuing over SW. slope.

- 51.40 Wash, 40 lks. wide, 3 ft. deep, drains SW.
- 58.40 Top of asc., bears SE. and N.; thence desc. 40 ft. along W. slope over exposed sandstone.
- 79.86 The cor. of secs. 5, 6, 31 and 32 on the N. bdy. of the tp., monumented with an iron post, $2\frac{1}{2}$ ins. diam., set, mkd. and witnessed as described in the official record of the 1958 survey.

Land, rolling and broken.

Soil, sandy clay.

No timber.

Undergrowth, scattered sagebrush and greasewood.

Description

The land in T. 39 S., R. 7 E. is entirely desert land. The soil is a sandy clay covered with a scattered to medium dense undergrowth of sagebrush and shadscale, with a good growth of grass throughout the township. The only timber in the township is a widely scattered growth of juniper in the southwest and northeast corners of the township and a few tamarack along the bottoms of the deeper draws. There was no permanent source of water noted in the township.

An improved dirt road from Escalante, Utah to Hole-In-The Rock enters the township in the northwest corner of Sec. 6, and runs in a southeasterly direction, leaving the township in the SW. cor. of Sec. 35. The elevation of

Survey of a Portion of the Subdivision
of Township 39 South, Range 7 East

CHAINS

the township ranges from about 4800 feet above sea level
in most of the township to about 6000 feet above sea
level on the benches in the southwest corner of Sec. 31.

CHAINS

CERTIFICATE OF SURVEY

I, Gerald W. Hochstrasser, HEREBY CERTIFY upon honor that,
 in pursuance of special instructions bearing date of the 15th day of October, 1964,
 I have surveyed a portion of the subdivision of Township 39 South, Range
 7 East

of the Salt Lake Meridian, in the State of Utah, which
 are represented in the foregoing field notes as having been executed by me and under my direction;
 and that said survey has been made in strict conformity with said special instructions, the Manual
 of Instructions for the Survey of the Public Lands of the United States, and in specific manner
 described in the foregoing field notes.

June 7, 1966

(Date)

(Cadastral Surveyor)

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

SUBMITTED FOR APPROVAL
 Date SEP 28 1967

BUREAU OF LAND MANAGEMENT,
 Washington, D. C.

The foregoing field notes of the survey of a portion of the subdivision of
 Township 39 South, Range 7 East, Salt Lake Meridian, Utah

executed by Gerald W. Hochstrasser, Supervisory Cadastral Surveyor
 having been critically examined and found correct, are hereby approved.

DEC 21 1967

(Date)

Acting (Chief, Division of Engineering)

CERTIFICATE OF TRANSCRIPT

, is a true copy of the original field notes.

Blank

Page

Blank

Page

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

ORIGINAL

FIELD NOTES

FEB 7 1964 00 0

OF THE

SURVEY

OF A

PORTION OF THE SUBDIVISIONAL LINES

OF

SECTIONS 34 AND 35

TOWNSHIP 41 SOUTH, RANGE 5 EAST

Of the SALT LAKE Meridian,

In the State of UTAH

EXECUTED BY

CRAIG P. SYLVESTER SUPERVISORY CADASTRAL SURVEYOR

Under special instructions dated JUNE 26, 19 64, which provided for the surveys

included under Group Number 475, approved JUNE 29, 1964,

and assignment instructions dated DECEMBER 9, 19 64.

Survey commenced DECEMBER 18, 19 64

Survey completed JULY 13, 19 65

INDEX DIAGRAM

Township 41 SOUTH, Range 5 EAST

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
			3	3	
31	32	33	34	2 35	36

Portion of the Subdivision, T. 41 S., R. 5 E.

CHAINS

The north, south, east and west boundaries and a portion of the subdivision were surveyed by Vern E. Lane in 1958.

The following field notes are those of a survey of the subdivisional lines completing secs. 34 and 35 in T. 41 S., R. 5 E.

The survey was executed in accordance with the specifications as set forth in the Manual of Instructions, 1947, and the Special Instructions dated June 26, 1964.

Corners on the east-west lines were set on the true latitudinal curve. Lines connecting previously established corners were run by random and true method, but for simplification of the record, the random lines are omitted from these field notes.

All lines of this survey were run by direct method where lines were accessible; lines inaccessible were run by traverse or triangulation method. Distance to topography on lines run by traverse and triangulation methods are approximately as scaled from U.S.G.S. topographic sheets. The details of such traverses and triangulations have been thoroughly checked and verified, and in order to simplify the records, the diagrams and reductions are omitted from these field notes.

The direction of the lines of this survey were determined by references to true meridians established on line by observations on the sun. They were carried forward by sustained angulation, being supplemented by numerous other observations on the sun taken throughout the progress of the survey.

The geographic position for the southeast corner of section 35 is in Latitude $37^{\circ} 11' 37.0''$ N. and Longitude $111^{\circ} 19' 34.4''$ W., as determined by the data furnished with the Special Instructions.

The magnetic declination was read at a number of stations throughout the township and the average of the several readings was found to be $15^{\circ} 15' E.$

Beginning at the true point for the cor. of secs. 2, 3, 34 and 35 on the S. bdy., established in 1958. This cor. has been lost due to erosion and its position was reestablished midpoint bet. the $\frac{1}{2}$ sec. cors. of secs. 2 and 35 and 3 and 34. This point now falls in a gully and cannot be perpetuated.

Therefore, at a point S. $89^{\circ} 58' E.$, 0.23 chs. dist. from the true point for the cor. of secs. 2, 3, 34 and 35.

Set an iron post 30 ins. long $2\frac{1}{2}$ ins. diam., 10 ins. in the ground, in a mound of stone, 4 ft. base, to top, with brass cap mkd.

T41S R5E

W	S34	S35
C	S3	S2

T42S

1964

Portion of the Subdivision, T. 41 S., R. 5 E.

CHAINS

From the true point for this cor., the $\frac{1}{4}$ sec. cor. for secs. 2 and 35, bears S. $89^{\circ} 58' E.$, 40.00 chs. dist., marked by an iron post $2\frac{1}{2}$ ins. diam., set, mkd. and witnessed as described in the survey of the S. bdy., in 1958.

From the same corner point, the $\frac{1}{4}$ sec. cor. of secs. 3 and 34, bears N. $89^{\circ} 58' W.$, 40.00 chs. dist., mkd. by an iron post $2\frac{1}{2}$ ins. diam., set, mkd. and witnessed as described in the survey of the S. bdy. of T. 41 S., R. 5 E., in 1958.

N. $0^{\circ} 01' W.$, bet. secs. 34 and 35.

Over broken and mountainous desert land, covered with scattered shadscale; asc. 120 ft. over S. slope of small spur.

- 3.20 Spur, slopes E.; asc. 140 ft. over series of broken spurs and gullies draining SE. about 4 chs. to wash; thence S.
- 40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 34 and 35, falls on steep N. slope of spur, and cannot be perpetuated.
- 40.40 Small wash, drains SE., about 2 chs.; thence S.
- 40.60 Point selected for the witness $\frac{1}{4}$ sec. cor. of secs. 34 and 35.
- Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins. in the ground, in a mound of stone 4 ft. base, to top, with brass cap mkd.

T41S R5E

$\frac{1}{4}$
S34 | S35
↓
W C

1964

Asc. 400 ft. over broken SE. slope, by triangulation with topography scaled.

- 74.00 Base of ledges, bears SW. and E.; asc. 450 ft. over ledges facing S.
- 79.10 Crest same ledges, bears SW. and E.; asc. 10 ft. over gentle S. slope. End triangulation.
- 80.00 Point for the cor. of secs. 26, 27, 34 and 35.
- Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 8 ins. in the ground, in a mound of stone 4 ft. base, to top, with brass cap mkd.

T41S R5E

S27 | S26
S34 | S35

1964

Portion of the Subdivision, T. 41 S., R. 5 E.

CHAINS	
	<p>Land, broken. Soil, clay, sand and exposed sandstone. Timber, none. Undergrowth, scattered shadscale.</p>
	<p>From the cor. of secs. 25, 26, 35 and 36, marked by an iron post 2½ ins. diam., set, mkd. and witnessed as described in the survey of a portion of the subdivision, in 1958.</p> <p>S. 89° 57' W., bet. secs. 26 and 35.</p> <p>Over broken desert land, covered with scattered shadscale; asc. 30 ft. along N. slope of long spur extending E.</p>
26.90	Base of steep ascent, bears N. and curves SE.; asc. 200 ft. over irregular NE. slope.
38.34	<p>Point selected for the witness ¼ sec. cor. of secs. 26 and 35.</p> <p>Set an iron post 30 ins. long, 2½ ins. diam., 14 ins. in the ground, in a mound of stone 3 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T41S R5E</p> <p style="text-align: center;"> $\begin{array}{c} \frac{1}{4} \text{ W} \leftarrow \text{S26} \\ \text{C} \leftarrow \text{S35} \end{array}$ </p> <p style="text-align: center;">1964</p>
	Asc. 100 ft. over ledgy E. slope.
40.02	Point for the ¼ sec. cor. of secs. 26 and 35, at midpoint, falls on small ledge facing E. and cannot be perpetuated. Asc. 500 ft. over ledgy NE. slope. By triangulation, topography scaled.
57.40	High red shale spur, slopes sharply SE.; asc. 100 ft. along broken and inaccessible ledges facing S.
78.00	Rim, bears E. and SW.; thence along S. slope above rim.
80.04	The cor. of secs. 26, 27, 34 and 35.
	<p>Land, broken. Soil, sand, clay and exposed sandstone. Timber, none. Undergrowth, scattered shadscale.</p>
	<p>N. 89° 56' W., bet. secs. 27 and 34.</p> <p>Over broken mountain desert land, covered with shadscale, along S. slope, on high ridge.</p>
1.70	Crest of steep descent, bears NE. and SW.; desc. 300 ft. over W. slope.
18.90	Wash in draw, drains S. 25° W.; asc. 200 ft. over SE. slope.

Portion of the Subdivision, T. 41 S., R. 5 E.

CHAINS

- 22.10 Spur, slopes SW.; desc. 200 ft. over NE. slope.
- 28.40 Small draw, drains S. 10° W.; asc. 100 ft. over E. slope.
- 35.30 Spur, slopes S.; desc. 100 ft. over W. slope.
- 40.00 Point for the ¼ sec. cor. of secs. 27 and 34, at midpoint.

Set an iron post 30 ins. long, 2½ ins. diam., 6 ins. in the ground, in a mound of stone 3 ft. base, to top, with brass cap mkd.

T41S R5E

$$\frac{1}{4} \frac{S27}{S34}$$

1964

Desc. W. slope.

- 41.20 Small draw, drains S.; asc. 120 ft. over SE. slope.
- 61.40 Enter ledges facing SE.; asc. 190 ft.
- 78.30 Ridge, bears NE. and SW. irregular; thence over NW. slope of small spur sloping W.
- 80.00 The cor. of secs. 27, 28, 33 and 34, marked by an iron post 2½ ins. diam., set, mkd. and witnessed as described in the survey of a portion of the subdivision, in 1958.

Land, broken.
Soil, sand and exposed sandstone.
Timber, none.
Undergrowth, scattered shadscale.

General Description


The land covered by this portion of T. 41 S., R. 5 E., consists of mountainous desert land draining generally south. The higher elevations are sand and exposed sandstone ledges, the lower elevations consist of irregular clay spurs and gullies. No permanent water was noted during the survey. The undergrowth is mainly scattered shadscale, there is no timber. The elevation varies from about 4,000 ft. to 5,400 ft. above sea level.

CERTIFICATE OF SURVEY

I, Craig P. Sylvester, HEREBY CERTIFY upon honor that,
 in pursuance of special instructions bearing date of the 26th day of June, 1964,
 I have surveyed a portion of the subdivisional lines of ~~secs. 34 and 35~~,
 Township 41 South, Range 5 East

of the Salt Lake Meridian, in the State of Utah, which
 are represented in the foregoing field notes as having been executed by me and under my direction;
 and that said survey has been made in strict conformity with said special instructions, the Manual
 of Instructions for the Survey of the Public Lands of the United States, and in specific manner
 described in the foregoing field notes.

October 3, 1966
 (Date)

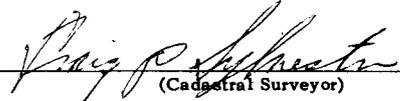
 (Cadastral Surveyor)
 SUPERVISORY

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

SUBMITTED FOR APPROVAL
 Date SEP 28 1967

BUREAU OF LAND MANAGEMENT,
 Washington, D. C.

The foregoing field notes of the subdivisional lines of ~~secs. 34 and 35~~,
 Township 41 South, Range 5 East, Salt Lake Meridian, Utah

executed by Craig P. Sylvester, Supervisory Cadastral Surveyor
 having been critically examined and found correct, are hereby approved.


 (Date)


 (Chief, Division of Engineering)

CERTIFICATE OF TRANSCRIPT

, is a true copy of the original field notes.

Blank

Page

Blank

Page

FIELD NOTES

OF THE
SURVEY

OF

A PORTION OF THE SUBDIVISIONAL LINES

COMPLETING THE SUBDIVISION OF

TOWNSHIP 41 SOUTH, RANGE 5 EAST

Of the SALT LAKE Meridian,

In the State of UTAH

EXECUTED BY

CRAIG P. SYLVESTER SUPERVISORY CADASTRAL SURVEYOR

Under special instructions dated APRIL 30, 19 65, which provided for the surveys

included under Group Number 481, approved MAY 4, 1965,

and assignment instructions dated MAY 7, 19 65.

Survey commenced JULY 12, 19 65

Survey completed SEPTEMBER 27, 19 65

INDEX DIAGRAM

Township 41 SOUTH, Range 5 EAST

35	34	23	16			
6	33 8	21 4	8	2	1	
32	31	20	16		7	
7	30 8	19 9	10	15 11	6 12	
30	29		14	13	5	
18	28 17	16	15	12 14	4 13	
27	27		11	11	4	
19	26 20	19 21	22	10 23	3 24	
25	25	18	9	9	2	
30	24 29	17 28	27	8 26	1 25	
23		17				
31	32	33	34	35	36	

Portion of the Subdivision of T. 41 S., R. 5 E.

CHAINS

The North, (Eighth Standard Parallel South), East and West boundaries, and a portion of the subdivision lines were surveyed by Vern E. Lane, et al, in 1958.

The following field notes are those of a survey of the unsurveyed subdivisional lines of T. 41 S., R. 5 E.

The survey was executed in accordance with the specifications as set forth in the Manual of Instructions, 1947, and the special instructions dated April 30, 1965.

Corners on the east-west lines were set on the true latitudinal curve. Lines connecting previously established corners were run by random and true method, but for simplification of the record, the random lines are omitted from these field notes.

All lines of this survey were run by direct method where lines were accessible; lines inaccessible were run by traverse or triangulation method. Distances to topography on lines run by traverse and triangulation methods are approximate as scaled from U.S.G.S. topographic sheets. The details of such traverses and triangulations have been thoroughly checked and verified, and in order to simplify the records, the diagrams and reductions are omitted from these field notes.

The geographic position for the southeast corner of the township is at Latitude $37^{\circ} 11' 37.0''$ N. and Longitude $111^{\circ} 18' 29.1''$ W. as determined from section line ties, made to U.S.G.S. triangulation station Rock Creek, which is at Latitude $37^{\circ} 11' 31.344''$ N. and Longitude $111^{\circ} 12' 21.340''$ W.; located in the northeast portion of section 1, T. 42 S., R. 6 E.

The magnetic declination was read at a number of stations throughout the township and the average of the several readings was found to be $15^{\circ} 15'$ East.

Beginning at the cor. of secs. 25, 26, 35 and 36, marked by an iron post, $2\frac{1}{2}$ ins. diam.; set, mkd. and witnessed as recorded in the survey of a portion of the subdivision of the Tp., in 1958.

N. $0^{\circ} 01'$ W., bet. secs. 25 and 26.

Over broken desert mountain land; desc. 100 ft. over a N. slope.

10.00 Wash, 20 lks. wide, 6 ft. deep, drains E.; asc. 130 ft. over a S. slope.

15.20 Spur, projects E.; desc. 200 ft. over a N. slope.

40.00 Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins. in the ground, in a mound of stone, $4\frac{1}{2}$ ft. base to top, with brass cap mkd.

T41S R5E

$\frac{1}{2}$
S26 | S25

1965

Desc. 80 ft. over a N. slope.

Portion of the Subdivision of T. 41 S. R. 5 E.

CHAINS

50.20 Wash, 20 lks. wide, 1 ft. deep, drains E.; asc. 100 ft. over a S. slope.

55.00 Spur, projects E.; desc. 120 ft. over a N. slope.

60.00 Wash, in draw, 30 lks. wide, 3 ft. deep, drains E.; asc. 100 ft. over a SE. slope.

73.20 Bulldozed road, on backbone of spur, ridge, bears E. and W.; desc. 60 ft. over a N. slope.

76.70 Wash, 10 lks. wide, 2 ft. deep, drains E.; asc. 55 ft. over a S. slope.

80.00 Point for the cor. of secs. 23, 24, 25 and 26.

Set an iron post, 30 ins. long, 2½ ins. in diam., 18 ins. in the ground to bedrock, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T41S R5E

S23	S24
S26	S25

1965

Land, broken desert mountain.
Soil, rocky clay.
No timber.
Undergrowth, scattered shadscale and weeds.

From the cor. of secs. 19, 24, 25 and 30, on the E. bdy. of the Tp., an iron post, 2½ ins. in diam., set, mkd. and witnessed as recorded in the survey of the E. bdy. of the Tp., in 1958.

N. 89° 59' W., bet. secs. 24 and 25.

Over broken desert mountain land; desc. 60 ft. over a rocky W. slope.

12.00 Rim of canyon bears irregularly N. and S.; desc. 120 ft. over a ledgy W. slope.

17.80 Bottom of Croton Canyon, drains S.; asc. 320 ft. over a E. slope.

39.97 Point for the ¼ sec. cor. of secs. 24 and 25.

Set an iron post, 30 ins. long, 2½ ins. in diam., 6 ins. in the ground to bedrock, in a mound of stone, 5 ft. base to top, with brass cap mkd.

T41S R5E

¼	S24
	S25

1965

Portion of the Subdivision of T. 41 S., R. 5 E.

CHAINS	
	Asc. 55 ft. over an E. slope.
61.40	Dirt road, bears NE. and SW.; asc. 115 ft. over an E. slope.
69.20	Small draw, drains N. 80° E.; asc. 60 ft. over an E. slope.
73.50	Recross draw, drains SE.; asc. 55 ft. over an E. slope.
79.94	The cor. of secs. 23, 24, 25 and 26. Land, broken desert mountain. Soil, rocky clay. No timber. Undergrowth, scattered shadscale, grass and weeds.
	N. 0° 01' W., bet. secs. 23 and 24. Over broken desert mountain land, along an E. slope.
15.60	Slope changes to N.; desc. 135 ft.
20.90	Wash, 30 lks. wide, 2 ft. deep, drains E.; asc. 150 ft. over a broken S. slope.
28.70	Spur, projects E.; desc. 60 ft. over a N. slope.
40.00	Point for the 1/4 sec. cor. of secs. 23 and 24. Set an iron post, 30 ins. long, 2 1/2 ins. in diam., 4 ins. in the ground to bedrock, in a mound of stone, 4 ft. base to top, with brass cap mkd. T41S R5E 1/4 S23 S24 1965
	Desc. 100 ft. over a N. slope.
41.90	Wash, in bottom of draw, 50 lks. wide, 4 ft. deep, drains E.; asc. 50 ft. over a S. slope.
48.90	Top of ascent; desc. 65 ft. over a N. slope.
54.00	Draw, drains E.; asc. 40 ft. over a S. slope.
56.50	Spur, projects E.; desc. 60 ft. along an E. slope.
73.80	Wash, drains S. 10° E., asc. 35 ft. a gentle S. slope.
80.00	Point for the cor. of secs. 13, 14, 23 and 24. Set an iron post, 30 ins. long, 2 1/2 ins. in diam., 12 ins. in the ground to bedrock, in a mound of stone, 4 ft. base to top, with brass cap mkd. T41S R5E S14 S13 S23 S24 1965

Portion of the Subdivision of T. 41 S. R. 5 E.

CHAINS

Land, broken desert mountain.
Soil, rocky clay.
No timber.
Undergrowth, scant shadscale grass and weeds.

From the cor. of secs, 13, 18, 19 and 24, on the E. bdy. of the Tp., an iron post, 2½ ins. in diam., set, mkd. and witnessed as recorded in the survey of the E. bdy. of the Tp., in 1958.

West, bet. secs. 13 and 24.

Over rolling desert mountain land; desc. 50 ft. over a W. slope.

4.60 Wash in bottom of Croton Canyon, 2.00 chs. wide, 5 ft. deep, drains S.; asc. 45 ft. over a rolling E. slope.

39.96 Point for the ¼ sec. cor. of secs. 13 and 24.

Set an iron post, 30 ins. long, 2½ ins. in diam., 4 ins. in the ground to solid rock, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T41S R5E

¼ $\frac{S13}{S24}$

1965

Asc. 160 ft. over a SE. slope.

60.90 Low ridge, bears NE. and SW. desc. 90 ft. over a W. slope.

70.70 Wash, 1.00 ch. wide, 15 ft. deep, drains S. 10° E.; asc. 30 ft. over an E. slope.

79.40 Dirt road, bears SE. and NW.

79.92 The cor. of secs. 13, 14, 23 and 24.

Land, rolling desert mountain.
Soil, rocky, clay.
No timber.
Undergrowth, scant shadscale, grass and weeds.

N. 0° 01' W., bet. secs. 13 and 14.

Over rolling desert mountain land, through scant undergrowth.

0.60 Dirt road, bears SE. and NW.

10.90 Wash, 20 lks. wide, 5 ft. deep, drains SE.

29.00 Base of clay spur, ridge; asc. 320 ft. over a SW. slope.

Portion of the Subdivision of T. 41 S., R. 5 E.

CHAINS

37.50 Top of narrow clay spur ridge, bears NW. and SE.; desc. 60 ft. over a NE. slope.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 13 and 14.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 22 ins. in the ground, in a collar of stone, with brass cap mkd.

T41S R5E

$\frac{1}{4}$

S14 | S13

1965

Desc. 50 ft. over a NE. slope.

50.00 Draw, drains E.; asc. 120 ft. over a SE. slope.

56.00 Spur, projects E.; desc. 200 ft. over a NE. slope.

65.70 Draw, drains E.; asc. 250 ft. over a S. slope.

70.80 Spur, projects E.; desc. 120 ft. over a NE. slope.

80.00 Point for the cor. of secs. 11, 12, 13 and 14.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 6 ins. in the ground, to solid rock, in a mound of stone, $4\frac{1}{2}$ ft. base, to top, with brass cap mkd.

T41S R5E

S11 | S12

S14 | S13

1965

Land, broken desert.

Soil, rocky, clay.

No timber.

Undergrowth, scant shadscale, grass and weeds.

From the cor. of secs. 7, 12, 13 and 18, on the E. bdy. of the Tp., an iron post, $2\frac{1}{2}$ ins. in diam., set, mkd. and witnessed as recorded in the survey of the E. bdy. of the Tp., in 1958.

N. $89^{\circ} 58'$ W., bet. secs. 12 and 13.

Over rolling clay hills; along the top of a bench.

16.50 Rim of bench, bears N. and S.; desc. 180 ft. over a W. slope.

23.20 Wash, 1.00 ch. wide, 2 ft. deep, drains SW.; asc. 90 ft. over a E. slope.

37.90 Top of low clay ridge, bears N. and S.; desc. 30 ft. over a NW. slope.

39.93 Point for the $\frac{1}{4}$ sec. cor. of secs. 12 and 13.

Portion of the Subdivision of T. 41 S., R. 5 E.

CHAINS

Set an iron post, 30 ins. long, 2½ ins. in diam., 20 ins. in the ground, in a collar of stone, with brass cap mkd.

T41S R5E

½ $\frac{S12}{S13}$

1965

Desc. 20 ft. over a NW. slope.

- 42.90 Wash, 10 lks. wide, drains N. 80° E.
- 44.90 Recross wash, drains S., 50 lks., then NE.; asc. 430 ft. over a NE. changing to SE. slope.
- 79.86 The cor. of secs. 11, 12, 13 and 14.
- Land, rolling and broken desert.
Soil, rocky, clay.
No timber.
Undergrowth, shadscale and weeds.

N. 0° 10' W., bet. secs. 11 and 12.

Over broken desert mountain land; asc. 15 ft. over a SE. slope.

- 1.50 Spur, projects E.; desc. 175 ft. over a NE. slope.
- 12.00 Wash, 20 lks. wide, 2 ft. deep, drains E.; asc. 30 ft. over a S. slope.
- 16.70 Low spur, projects E.; desc. 140 ft. over a N. slope.
- 32.15 Bottom of deep draw, drains NE.; asc. 55 ft. over a SE. changing to an E. slope.
- 40.01 Point for the ½ sec. cor. of secs. 11 and 12.
- Set an iron post, 30 ins. long, 2½ ins. in diam., 4 ins. in the ground to solid rock, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T41S R5E

½
S11|S12

1965

Desc. 65 ft. along an E. slope.

- 60.70 Slope changes to N.; desc. 120 ft.
- 65.40 Wash, 20 lks. wide, 2 ft. deep, drains E.; desc. 105 ft. over a N. slope.

Portion of the Subdivision of T. 41 S., R. 5 W.

CHAINS

74.50 Wash, 50 lks. wide, 2 ft. deep, drains SE.; asc. 55 ft. over a S. slope.

78.10 White clay spur, projects W.; desc. 35 ft. over a W. slope.

80.02 The cor. of secs. 1, 2, 11 and 12, an iron post, 2 1/2 ins. in diam., set, mkd. and witnessed as recorded in the survey of the subdivision of the Tp. in 1958.

Land, broken desert mountains.
Soil, rocky clay.
No timber.
Undergrowth, scant shadscale, sagebrush and weeds.

From the cor. of secs. 1, 6, 7 and 12, on the E. bdy. of the Tp. an iron post, 2 1/2 ins. in diam., set, mkd. and witnessed as recorded in the survey of the E. bdy. of the Tp. in 1958.

N. 89° 58' W., bet. secs. 1 and 12.

Over broken desert mountain land; asc. 15 ft. over a rocky bench.

6.70 East rim of canyon, bears N. and S.; desc. 220 ft. over a broken W. slope.

16.70 Bottom of Rogers Canyon, drains S., asc. 325 ft. over a E. slope.

24.00 West rim of canyon, bears N. and S.; asc. 55 ft. over a NE. slope.

35.90 Spur, projects SE.; desc. 50 ft. over a SW. slope.

40.06 Point for the 1/4 sec. cor. of secs. 1 and 12.

Set an iron post, 30 ins. long, 2 1/2 ins. in diam., 10 ins. in the ground, to solid rock, in a mound of stone, 3 1/2 ft. base to top, with brass cap mkd.

T41S R5E

1/4 S1
S12

1965

41.00 Draw, drains S.; asc. 100 ft. over an E. slope.

44.30 Top of narrow ridge, bears N. and S.; desc. 80 ft. over a W. slope.

46.80 Draw, drains S.; asc. 50 ft. over an E. slope.

47.80 Spur, projects S.; desc. 65 ft. over a W. slope.

50.20 Draw, drains S.; thence over a series of small spurs and draws sloping S.

Portion of the Subdivision of T. 41 S., R. 5 E.

CHAINS

- 62.80 Spur, projects S.; desc. 60 ft. over a W. slope.
- 72.00 Wash, 10 lks. wide, 2 ft. deep, drains S.; asc. 195 ft. over a SE. slope.
- 76.50 Spur, projects SW. 50 lks.; then S.; desc. 105 ft. over a W. slope.
- 80.12 The cor. of secs. 1, 2, 11 and 12, previously described.

Land, broken desert mountains.

Soil, rocky clay.

No timber.

Undergrowth, scant shadscale, sagebrush and weeds.

Point for the N. $\frac{1}{2}$ sec. cor. of sec. 1; on the N. bdy. of the Tp. at midpoint bet. the closing cor. of T. 40 S., Rs. 5 and 6 E. and the cor. of secs. 1 and 2.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 6 ins. in the ground, to solid rock, in a mound of stone, 4 ft. base, to top, with brass cap mkd.

$\frac{1}{2}$ S1
 T41S R5E
 1965

From this cor., the standard $\frac{1}{2}$ sec. cor. of sec. 36, T. 40 S., R. 5 E., bears East 7.515 chs. dist., marked by an iron post, $2\frac{1}{2}$ ins. in diam., set, mkd. and witnessed as described in the survey of the S. bdy. of T. 40 S., R. 5 E., 1958 survey.

From the cor. of secs. 26, 27, 34 and 35, monumented with an iron post, $2\frac{1}{2}$ ins. in diam., set, mkd. and witnessed as described in the official record.

N. $0^{\circ} 01'$ W., bet. secs. 26 and 27.

Over desert mountain land; desc. 300 ft. over a NW. slope.

- 16.30 Draw, drains SW.; asc. 290 ft. over a SE. changing to S. slope.

- 37.10 Top of sandstone ledge, bears N. and SW.; asc. 10 ft. along ledge.

- 40.00 Point for the $\frac{1}{2}$ sec. cor. of secs. 26 and 27.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 4 ins. in the ground to solid rock, in a mound of stone, $4\frac{1}{2}$ ft. base to top, with brass cap mkd.

T41S R5E
 $\frac{1}{2}$
 S27 | S26
 1965

Asc. 60 ft. along top of ledge.

Portion of the Subdivision of T. 41 S., R. 5 E.

CHAINS	
48.20	Point of ledge, slopes E.; desc. 200 ft. along a broken E. slope.
80.00	<p>Point for the cor. of secs. 22, 23, 26 and 27.</p> <p>Set an iron post, 30 ins. long, 2½ ins. in diam., 4 ins. in the ground to solid rock, in a mound of stone, 4½ ft. base to top, with brass cap mkd.</p> <p style="text-align: center;">T41S R5E</p> <p style="text-align: center;">S22 S23 S27 S26</p> <p style="text-align: center;">1965</p> <p>Land, broken desert mountain. Soil, rocky clay, with a considerable amount of exposed sandstone. No timber. Undergrowth, scattered shadscale and sagebrush.</p>
40.08	<p>From the cor. of secs. 23, 24, 25 and 26, previously described.</p> <p>S. 89° 59' W., bet. secs. 23 and 26.</p> <p>Over desert mountain land; asc. 240 ft. over bench land, sloping to the E.</p> <p>Point for the ½ sec. cor. of secs. 23 and 26.</p> <p>Set an iron post, 30 ins. long, 2½ ins. in diam., 4 ins. in the ground, to solid rock, in a mound of stone, 4½ ft. base to top, with brass cap mkd.</p> <p style="text-align: center;">T41S R5E</p> <p style="text-align: center;">½ S23 S26</p> <p style="text-align: center;">1965</p> <p>Asc. 820 ft. over a badly broken, ledgy E. slope.</p>
80.16	<p>The cor. of secs. 22, 23, 26 and 27.</p> <p>Land, broken desert mountain. Soil, rocky clay, with a considerable amount of broken and eroded sandstone. No timber. Undergrowth, scant shadscale, sagebrush and weeds.</p>
8.10	<p>N. 89° 59' W., bet. secs. 22 and 27.</p> <p>Over broken desert mountain land; asc. 180 ft. over a ledgy E. slope.</p> <p>Ridge, bears N. and S.; desc. 420 ft., by triangulation, over a broken NW. slope.</p>
39.96	Point for the ½ sec. cor. of secs. 22 and 27 (end of triangulation).

Portion of the Subdivision of T. 41 S., R. 5 E.

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 18 ins. in the ground, to solid rock, in a mound of stone, $3\frac{1}{2}$ ft. base to top, with brass cap mkd.

T41S R5E

$\frac{1}{4}$ $\frac{S22}{S27}$

1965

Desc. 320 ft. over a NW. changing to a W. slope.

54.60 Draw, drains SW.; asc. 190 ft. over a SE. slope.

72.20 Spur, projects SE.; desc. 30 ft. over a rocky SW. slope.

79.92 The true point for the cor. of secs. 21, 22, 27 and 28. From which its witness cor., bears N. $0^{\circ} 02' W.$, 2.16 chs. dist., marked by an iron post, $2\frac{1}{2}$ ins. in diam., set, mkd. and witnessed as recorded in the survey of a portion of the subdivision of the Tp., in 1958.

Land, broken desert mountain.

Soil, rocky clay, with broken and exposed sandstone.

No timber.

Undergrowth, scant shadscale, grass and weeds.

From the cor. of secs. 22, 23, 26 and 27.

N. $0^{\circ} 01' W.$, bet. secs. 22 and 23.

Over badly broken desert mountain land, asc. 80 ft. along a ledgy E. slope.

17.70 Red ledge spur, projects E.; desc. 540 ft. by triangulation, over a badly broken NE. slope.

39.70 Point selected for the witness $\frac{1}{4}$ sec. cor. of secs. 22 and 23 (end of triangulation).

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 6 ins. in the ground to solid rock, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T41S R5E

$\frac{1}{4}$

W C

S22 \uparrow S23

1965

40.00 True point for the $\frac{1}{4}$ sec. cor. of secs. 22 and 23, falls on the steep slope of a ledge and cannot be perpetuated.

Desc. 80 ft. over a NE. slope.

44.50 Draw, drains E.; asc. 75 ft. over a SE. slope.

50.00 Spur, projects E.; desc. 320 ft. over a broken NW. slope.

Portion of the Subdivision of T. 41 S., R. 5 E.

CHAINS	
74.50	Deep draw, drains NE.; asc. 160 ft. over a SE. slope.
80.00	Point for the cor. of secs. 14, 15, 22 and 23, falls on a steep SE. slope of clay spur, and cannot be perpetuated.
	Land, broken desert mountain. Soil, rocky clay, with exposed broken and eroded sandstone. No timber. Undergrowth, scant shadscale, sagebrush, grass and weeds.
	From the cor. of secs. 13, 14, 23 and 24.
	S. 89° 59' W., bet. secs. 14 and 23.
	Over desert mountain land; desc. 50 ft. over a W. slope.
2.60	Wash, in bottom of draw, 40 lks. wide, drains S.; asc. 155 ft. over a NE. slope.
23.00	Rim of bench, bears NW. and SE.; asc. 30 ft. over a gentle NE. slope.
28.70	Top of knoll; desc. 75 ft. over a W. slope.
40.04	Point for the $\frac{1}{2}$ sec. cor. of secs. 14 and 23.
	Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. in diam., 4 ins. in the ground, to solid rock, in a mound of stone, 4 ft. base to top, with brass cap mkd.
	T41S R5E
	$\frac{S14}{S23}$
	1965
40.54	Bottom of wash, in draw, drains NE.; asc. 250 ft. over a NE. slope.
62.00	Spur, projects N. 10° E.; desc. 110 ft. over a NW. slope.
75.00	Draw, drains NE.; asc. 190 ft. over a SE. slope.
80.08	The true point for the cor. of secs. 14, 15, 22 and 23, from which its witness cor. bears N. 0° 01' W., 50 lks. dist.
	Land, rolling desert mountain. Soil, rocky clay. No timber. Undergrowth, scant shadscale, sagebrush, grass and weeds.
	From the true point for the cor. of secs. 14, 15, 22 and 23.
	S. 89° 56' W., bet. secs. 15 and 22.
	Over broken desert mountain land; asc. 120 ft. over a SE. slope.

Portion of the Subdivision of T. 41 S., R. 5 E.

CHAINS

- 6.00 Clay spur, projects NE.; desc. 40 ft. along a N. slope.
- 15.00 Draw, drains NE.; asc. 640 ft. over a ledgy NE. slope.
- 34.90 Ridge, bears N. and S.; desc. 100 ft. along a NW. slope.
- 39.97 Point for the $\frac{1}{2}$ sec. cor. of secs. 15 and 22.
Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 4 ins. in the ground to solid rock, in a mound of stone, 4 ft. base to top, with brass cap mkd.
- T41S R5E
 $\frac{1}{2}$ $\frac{S15}{S22}$
1965
- Desc. 175 ft. along a NW. slope.
- 54.10 Draw, drains S. 80° W.; then along a broken S. slope.
- 79.94 The cor. of secs. 15, 16, 21 and 22, monumented by an iron post, $2\frac{1}{2}$ ins. in diam., set, mkd. and witnessed as recorded in the survey of a portion of the subdivision of the Tp. in 1958.
Land, broken desert mountain.
Soil, rocky clay, with a considerable amount of exposed sandstone.
No timber.
Undergrowth, scant shadscale, grass and weeds.
-
- From the true point for the cor. of secs. 14, 15, 22 and 23.
N. $0^\circ 01'$ W., bet. secs. 14 and 15.
Over broken desert mountain land; asc. 30 ft. over a SE. clay slope.
- .50 Point selected for the witness cor. of secs. 14, 15, 22 and 23.
On top of a clay spur, projecting NE., set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 10 ins. in the ground to solid rock, in a mound of stone, $4\frac{1}{2}$ ft. base to top, with brass cap mkd.
- T41S R5E
 $\frac{S15}{S22}$ | $\frac{S14}{S23}$
W C
1965
- Desc. 210 ft. over a broken N. slope.
- 11.00 Draw, drains E.; asc. 130 ft. over a SE. slope.

Portion of the Subdivision of T. 41 S., R. 5 E.

CHAINS	
16.00	Spur, projects E.; desc. 65 ft. over a N. slope.
27.60	Rim of canyon, bears E. and W.; desc. 210 ft. over ledges sloping N.
30.80	Bottom of canyon drains E.; asc. 285 ft. over a rocky S. slope.
40.00	Point for the $\frac{1}{2}$ sec. cor. of secs. 14 and 15.
	Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 6 ins. in the ground to solid rock, in a mound of stone, $4\frac{1}{2}$ ft. base to top, with brass cap mkd.
	T41S R5E
	$\frac{1}{2}$ S15 S14
	1965
	Asc. 40 ft. over a S. slope.
41.00	Small spur, projects E.; desc. 80 ft. over a NE. slope.
43.10	Small draw, drains SE.; asc. 80 ft. over a S. slope.
52.50	Spur, projects SE.; desc. 25 ft. over a NW. slope.
58.74	Dirt road, in draw, drains SE., road, bears SE. and NW.; asc. 150 ft. over a S. slope.
64.10	Spur, projects E.; desc. 40 ft. over a NE. slope.
68.60	Small draw, drains E.; asc. 80 ft. over a S. slope.
71.70	Spur, projects E.; desc. 50 ft. over a NE. slope.
75.70	Draw, drains SE.; asc. 110 ft. over a S. slope.
80.00	Point for the cor. of secs. 10, 11, 14 and 15.
	Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 4 ins. in the ground to solid rock, in a mound of stone, 4 ft. base to top, with brass cap mkd.
	T41S R5E
	<u>S10 S11</u> <u>S15 S14</u>
	1965
	Land, broken desert mountain. Soil, rocky clay. No timber. Undergrowth, scant shadscale, sagebrush, grass and weeds.
	From the cor. of secs. 11, 12, 13 and 14.
	S. $89^{\circ} 59'$ W.; bet. secs. 11 and 14.

Portion of the Subdivision of T. 41 S., R. 5 E.

CHAINS

Over rolling desert mountain land; asc. 190 ft. over a NE. slope.

40.07 Point for the $\frac{1}{2}$ sec. cor. of secs. 11 and 14.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 8 ins. in the ground to solid rock, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T41S R5E

$\frac{1}{2}$ $\frac{S11}{S14}$

1965

Asc. 100 ft. over a NE. slope.

53.00 High spur, projects SE.; desc. 100 ft. along a broken SW. changing to a S. slope.

80.14 The cor. of secs. 10, 11, 14 and 15.

Land, broken desert mountain.

Soil, rocky clay.

No timber.

Undergrowth, medium dense shadscale, sagebrush, grass and weeds.

S. 89° 58' W., bet. secs. 10 and 15.

Over broken desert mountain land; asc. 45 ft. along a S. slope.

5.50 Top of rise; desc. 30 ft. over a SW. slope.

7.60 Small draw, drains S.; asc. 35 ft. over an E. slope.

13.50 Small spur, projects S.; desc. 150 ft. over a W. slope.

19.30 Draw, drains S.; asc. 90 ft. over an E. slope.

25.15 Bulldozed road, bears irregularly N. and S.; asc. 15 ft. over an E. slope.

30.00 Top of bench; desc. 135 ft. over a SW. slope.

39.95 Point for the $\frac{1}{2}$ secs. cor. of secs. 10 and 15.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 18 ins. in the ground to solid rock, in a mound of stone, 3 ft. base to top, with brass cap mkd.

T41S R5E

$\frac{1}{2}$ $\frac{S10}{S15}$

1965

Desc. 100 ft. along a SW. slope.

Portion of the Subdivision of T. 41 S., R. 5 E.

CHAINS	
45.90	Draw, drains SE.; asc. 650 ft. over a broken E. slope.
76.50	Spur, projects NE.; desc. 100 ft. over a NW. slope.
79.90	The cor. of secs. 9, 10, 15 and 16, monumented by an iron post, 2½ ins. in diam., set, mkd. and witnessed as recorded in the survey of a portion of the subdivision of the Tp. in 1958.
	Land, broken desert mountain. Soil, rocky clay, with broken and eroded sandstone. No timber. Undergrowth, scant shadscale, sagebrush, grass and weeds.
	From the cor. of secs. 10, 11, 14 and 15.
	N. 0° 01' W., bet. secs. 10 and 11.
	Over broken desert mountain land; asc. 230 ft. over a broken S. slope.
13.20	High spur, projects SE.; desc. 140 ft. over a NE. slope.
20.90	Draw, drains SE.; asc. 65 ft. over a S. slope.
26.40	Spur, projects E.; desc. 60 ft. over a NE. slope.
28.60	Small draw, drains E.; asc. 40 ft. over a S. slope.
31.00	Spur, projects SE.; desc. 90 ft. over a NE. slope.
36.04	Point selected for the witness ¼ sec. cor. of secs. 10 and 11.
	Set an iron post, 30 ins. long, 2½ ins. in diam., 4 ins. in the ground, to solid rock, in a mound of stone, 4 ft. base to top, with brass cap mkd.
	T41S R5E ¼ W C S10↑S11 1965
	Thence by triangulation; desc. 150 ft. over a badly broken NE. slope.
40.02	True point for the ¼ sec. cor. of secs. 10 and 11, falls on the steep slope of a ledge, facing NE. where the corner cannot be perpetuated.
	Desc. 450 ft. over a ledgy NE. slope.
80.04	The cor. of secs. 2, 3, 10 and 11, monumented with an iron post, 2½ ins. in diam., set, mkd. and witnessed as recorded in the survey of a portion of the subdivision of the Tp. in 1958.
	Land, broken desert mountain. Soil, rocky clay, with a considerable amount of exposed sandstone. No timber. Undergrowth, scant shadscale sagebrush, grass and weeds.

Portion of the Subdivision of T. 41 S. R. 5 E.

CHAINS

N. 89° 59' W., bet. secs. 3 and 10.

Over broken desert mountain land; asc. by triangulation 500 ft. over a ledgy NE. slope.

30.80 High spur, projects SE.; desc. 60 ft. over a W. slope.

35.30 Bulldozed road, bears irregularly N. and S.; desc. 115 ft. over a W. slope.

40.03 Point for the $\frac{1}{4}$ sec. cor. of secs. 3 and 10.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 6 ins. in the ground to solid rock, in a mound of stone, $4\frac{1}{2}$ ft. base to top, with brass cap mkd.

T41S R5E

$\frac{1}{4}$ $\frac{S3}{S10}$

1965

Desc. 85 ft. over a W. slope.

49.10 Draw, drains S.; asc. 85 ft. over an E. slope.

57.10 Spur, projects S.; desc. 40 ft. over a W. slope.

60.60 Draw, drains S.; asc. 85 ft. over a SE. slope.

65.10 Spur, projects S.; desc. 175 ft. over a SW. slope.

80.06 The cor. of secs. 3, 4, 9 and 10, monumented by an iron post, $2\frac{1}{2}$ ins. in diam., set, mkd. and witnessed as recorded in the survey of a portion of the subdivision of the Tp. in 1958.

Land, broken desert mountain.

Soil, rocky clay.

No timber.

Undergrowth, medium dense shadscale, sagebrush, grass and weeds.

Point for the N. $\frac{1}{4}$ sec. cor. of sec. 3, on the N. bdy. of the Tp. at midpoint bet. the cor. of secs. 2 and 3, and the closing cor. of secs. 3 and 4.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 6 ins. in the ground to solid rock, in a mound of stone, $3\frac{1}{2}$ ft. base to top, with brass cap mkd.

$\frac{1}{4}$ S3

T41S R5E

1965

From this cor., the standard witness $\frac{1}{4}$ sec. cor. of sec. 34, T. 40 S., R. 5 E., bears east, 5.415 chs. dist., marked by an iron post, $2\frac{1}{2}$ ins. in diam., set, mkd. and witnessed as described in the survey of the S. bdy. of T. 40 S., R. 5 E., 1958 survey.

Portion of the Subdivision of T. 41 S., R. 5 E.

CHAINS	
	<p>From the cor. of secs. 27, 28, 33 and 34.</p> <p>S. 89° 57' W., bet. secs. 28 and 33.</p> <p>Over broken desert mountain land; asc. 10 ft. along a steep N. slope.</p>
3.50	Spur, projects N.; desc. 120 ft. along a N. slope.
10.00	Spur, projects N.; asc. 80 ft. over a ledgy NE. slope.
14.00	Spur, projects N.; desc. 90 ft. along a NW. slope.
19.50	Spur, projects NW.; desc. 720 ft. over a W. slope.
40.00	<p>Point for the $\frac{1}{4}$ sec. cor. of secs. 28 and 33.</p> <p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 4 ins. in the ground to solid rock, in a mound of stone, 4 ft. base to top, with brass cap mkd.</p> <p style="text-align: center;">T41S R5E $\frac{1}{4}$ $\frac{S28}{S33}$ 1965</p>
80.00	<p>Desc. 230 ft. over a gentle west slope.</p> <p>The cor. of secs. 28, 29, 32 and 33, monumented by an iron post, 2$\frac{1}{2}$ ins. in diam., set, mkd. and witnessed as recorded in the survey of a portion of the subdivision of the Tp. in 1958.</p> <p>Land, desert mountain. Soil, rocky clay. No timber. Undergrowth, scattered shadscale, grass and weeds.</p>
	<p>N. 0° 03' W., bet. secs. 28 and 29.</p> <p>Over desert mountain land; desc. 120 ft. over a NW. slope.</p>
15.00	Draw, drains SW.; asc. 130 ft. over a S. slope.
20.00	Top of ascent; thence over broken bench land, sloping to the W.
39.65	<p>Point selected for the witness $\frac{1}{4}$ sec. cor. of secs. 28 and 29.</p> <p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 4 ins. in the ground, to solid rock, in a mound of stone, 4 ft. base to top, with brass cap mkd.</p> <p style="text-align: center;">T41S R5E $\frac{1}{4}$ W C S29 \uparrow S28 1965</p> <p>The above cor. is set on a clay spur, sloping to the W.</p>

Portion of the Subdivision of T. 41 S., R. 5 E.

CHAINS	
40.00	True point for the $\frac{1}{4}$ sec. cor. of secs. 28 and 29, falls on a steep N. clay slope, where the cor. cannot be perpetuated. Desc. 40 ft. over a N. slope.
42.65	Wash, drains SW.; asc. 45 ft. over a S. slope.
45.30	Spur, projects W.; desc. 80 ft. over a N. slope.
52.40	Draw, drains SW.; asc. 100 ft. along a broken E. slope.
78.50	Wash, 10 lks. wide, 6 ft. deep, drains E. 1.00 ch. then S.; asc. 30 ft. over a S. slope.
80.00	Point for the cor. of secs. 20, 21, 28 and 29. Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 6 ins. in the ground to solid rock, in a mound of stone, $4\frac{1}{2}$ ft. base to top, with brass cap mkd. T41S R5E $\begin{array}{r} \underline{S20} \underline{S21} \\ \underline{S29} \underline{S28} \end{array}$ 1965 Land, broken desert mountain. Soil, rocky clay. No timber. Undergrowth, scattered shadscale, sagebrush, grass and weeds.
	From the true point for the cor. of secs. 21, 22, 27 and 28. S. $89^{\circ} 58'$ W., bet. secs. 21 and 28. Over broken desert mountain land; desc. 5 ft. over a SW. slope.
.40	Draw, drains S.; along a S. slope.
3.60	Slope changes to SW.; desc. 440 ft.
40.07	Point for the $\frac{1}{4}$ sec. cor. of secs. 21 and 28. Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 18 ins. in the ground, to solid rock, in a mound of stone, 3 ft. base to top, with brass cap mkd. T41S R5E $\frac{1}{4} \quad \begin{array}{r} \underline{S21} \\ \underline{S28} \end{array}$ 1965 Desc. 160 ft. over a broken SW. slope.
60.40	Fork of Last Chance Creek, dry, drains SW.; asc. 195 ft. along a broken S. slope.
75.60	Spur, projects S.; desc. 130 ft. over a SW. slope.

Portion of the Subdivision of T. 41 S., R. 5 E.

CHAINS	
80.14	<p>The cor. of secs. 20, 21, 28 and 29.</p> <p>Land, broken desert mountain. Soil, rocky clay, with a considerable amount of exposed sandstone. No timber. Undergrowth, scattered shadscale, sagebrush, grass and weeds.</p>
	<p>N. 0° 02' E., bet. secs. 20 and 21.</p> <p>Over broken desert mountain land; asc. 500 ft. over a broken SW. slope.</p>
15.00	<p>Top of shelf, bears E. and W.; asc. 80 ft. over a S. slope.</p>
25.00	<p>Spur, projects SE.; asc. 80 ft. along an E. slope.</p>
40.01	<p>Point for the 1/2 sec. cor. of secs. 20 and 21.</p> <p>Set an iron post, 30 ins. long, 2 1/2 ins. in diam., 4 ins. in the ground to solid rock, in a mound of stone, 4 ft. base to top, with brass cap mkd.</p>
	<p style="text-align: center;">T41S R5E 1 S20 1/2 S21 1965</p>
	<p>Asc. 80 ft. along an E. slope.</p>
46.80	<p>Spur, projects S. 10° W.; desc. 120 ft. over a NW. slope.</p>
65.90	<p>Draw, drains W.; asc. 60 ft. over a SW. slope.</p>
72.40	<p>Spur, projects W.; desc. 130 ft. over a NW. slope.</p>
80.02	<p>The cor. of secs. 16, 17, 20 and 21, monumented by an iron post, 2 1/2 ins. in diam., set, mkd. and witnessed as recorded in the survey of a portion of the subdivision of the Tp. in 1958.</p>
	<p>Land, broken desert mountain. Soil, rocky clay, with exposed broken sandstone. No timber. Undergrowth, scant shadscale, sagebrush, grass and weeds.</p>
	<p>From the cor. of secs. 8, 9, 16 and 17, monumented by an iron post, 2 1/2 ins. in diam., set, mkd. and witnessed as recorded in the survey of a portion of the subdivision of the Tp. in 1958.</p>
	<p>N. 0° 03' W., bet. secs. 8 and 9.</p>
	<p>Over broken desert mountain land; desc. 130 ft. over a NW. slope.</p>

Portion of the Subdivision of T. 41 S., R. 5 E.

CHAINS

- 9.60 Wash, 10 lks. wide, 1 ft. deep, drains SW.; desc. 60 ft. along a W. slope.
- 16.50 Wash, 10 lks. wide, drains W.; desc. 40 ft. along a W. slope.
- 21.30 Wash, 10 lks. wide, 1 ft. deep, drains SW.; asc. 60 ft. over a S. slope.
- 26.00 Top of bench, then over rolling land.
- 39.80 Rim of canyon bears NE. and W.; desc. 5 ft. over a NW. slope.
- 40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 8 and 9.

Over a cross (X) cut in solid rock, set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., in a mound of stone, $4\frac{1}{2}$ ft. base to top, with brass cap mkd.

T41S R5E

$\frac{1}{4}$

S8|S9

1965

Desc. 225 ft. over a broken NW. slope.

- 50.80 Wash in bottom of draw, 20 lks. wide, 1 ft. deep, drains SW.; asc. 280 ft. over a broken S. slope.
- 62.70 N. rim of canyon, bears SE. and NW.; then over rolling bench top.
- 80.00 Point for the cor. of secs. 4, 5, 8 and 9.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 2 ins. in the ground to solid rock, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T41S R5E

S5|S4

S8|S9

1965

Land, broken desert mountain.

Soil, rocky clay, with a considerable amount of exposed sandstone.

No timber.

Undergrowth, scattered shadscale, sagebrush, grass and weeds.

From the cor. of secs. 3, 4, 9 and 10.

S. $89^{\circ} 52'$ W., bet. secs. 4 and 9.

Portion of the Subdivision of T. 41 S., R. 5 E.

CHAINS	
	Over broken desert mountain land; desc. 75 ft. over a SW. slope.
6.60	Wash, 20 lks. wide 1 ft. deep, drains S.; asc. 165 ft. over a NE. slope.
24.60	Spur, projects NE.; desc. 195 ft. over a W. slope.
37.00	Wash, 20 lks. wide, 1 ft. deep, drains S. 80° W.; asc. 175 ft. over a SE. slope.
40.00	Point for the ½ sec. cor. of secs. 4 and 9, falls on the steep slope of a ledge, where the cor. cannot be perpetuated.
40.60	Point selected for the witness ½ sec. cor. of secs. 4 and 9. Set an iron post, 30 ins. long, 2½ ins. in diam., 5 ins. in the ground to solid rock, in a mound of stone, 4 ft. base to top, with brass cap mkd. T41S R5E. $\frac{1}{4} \frac{S4^{\circ} W}{S9^{\circ} C}$ 1965 Asc. 40 ft. over a SE. slope.
43.20	Spur, projects S.; desc. 315 ft. over a W. slope.
57.70	Wash, in bottom of canyon, 1.00 ch. wide, 2 ft. deep, drains S.; asc. 310 ft. over a SE. slope.
69.10	Head of small cove; asc. 210 ft. over a SE. slope.
74.10	Bulldozed road, bears N. and S.; asc. 110 ft. over a SE. slope.
77.60	East rim of ridge, bears N. 10° W. and S. 10° E.; then along ridge top.
80.00	The cor. of secs. 4, 5, 8 and 9. Land, broken desert mountain. Soil, rocky clay, with exposed and broken sandstone. No timber. Undergrowth, scattered shadscale, sagebrush, grass and weeds.
	N. 0° 03' W., bet. secs. 4 and 5. Over broken desert mountain land; asc. 10 ft. over top of ridge.
4.20	Top of ridge, bears N. 10° W. and S. 10° E.; desc. 20 ft. over a NE. slope.
6.28	Sandstone ledge, bears E. and W.; desc. 40 ft. over a NE. slope.

Portion of the Subdivision of T. 41 S. R. 5 E.

CHAINS	
7.43	Bulldozed road, bears irregularly E. and W.; desc. 175 ft. over a NE. slope.
30.20	South rim of canyon, bears E. and W.; desc. 140 ft. over a N. slope.
40.00	Point for the $\frac{1}{2}$ sec. cor. of secs. 4 and 5. Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 8 ins. in the ground to solid rock, in a mound of stone, 4 ft. base to top, with brass cap mkd. T41S R5E $\frac{1}{2}$ S5 S4 1965 Desc. 30 ft. over a N. slope.
45.10	Wash, in bottom of canyon, wash, 30 lks. wide, 4 ft. deep, drains S. 10° E.; asc. 195 ft. over a broken S. slope.
50.40	N. rim of canyon, bears E. and W.; asc. 165 ft. along a W. slope.
80.00	Point for the N1/16 sec. cor. of secs. 4 and 5. Over a cross (X) cut in solid sandstone, set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., in a mound of stone, 4 ft. base to top, with brass cap mkd. T41S R5E N $\frac{1}{16}$ 16 S5 S4 80 1965 Asc. 30 ft. along a W. slope.
82.60	Top of rise; desc. 75 ft. over a N. slope.
91.26	Intersect the N. bdy. of the Tp. (Eight Standard Parallel South). Point for the closing cor. of secs. 4 and 5. Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 14 ins. in the ground to solid rock, in a mound of stone, 4 ft. base to top, with brass cap mkd. T40S R5E <hr/> S32 S5 S4 C C T41S R5E 1965 From this cor., the standard cor. of secs. 32 and 33, bears E. 7.42 chs. dist., monumented with an iron post, $2\frac{1}{2}$ ins. in diam., set, mkd. and witnessed as recorded in the survey of the S. bdy. of T. 40 S., R. 5 E., 1958 survey.

Portion of the Subdivision of T. 41 S., R. 5 E.

CHAINS

Land, broken desert mountain.
Soil, rocky, clay, with a considerable amount of exposed sandstone.
No timber.
Undergrowth, scant shadscale, sagebrush, grass and weeds.

Point for the N. $\frac{1}{4}$ sec. cor. of sec. 4, on the N. bdy. of the Tp. at midpoint bet. the closing cors. of secs. 3 and 4, and 4 and 5.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 10 ins. in the ground to solid rock, in a mound of stone, 4 ft. base to top, with brass cap mkd.

$\frac{1}{4}$ S4
T41S R5E
1965

From this cor., the standard $\frac{1}{4}$ sec. cor. of sec. 33, T. 40 S., R. 5 E., bears East, 7.405 chs. dist., marked by an iron post, $2\frac{1}{2}$ ins. in diam., set, mkd. and witnessed as recorded in the survey of the S. bdy. of T. 40 S., R. 5 E., 1958 survey.

From the cor. of secs. 29, 30, 31 and 32, monumented by an iron post, $2\frac{1}{2}$ ins. in diam., set, mkd. and witnessed as recorded in the survey of a portion of the subdivision of the Tp. 1958 survey.

N. $89^{\circ} 45'$ W. bet. secs. 30 and 31.

Over broken desert mountain land; desc. 140 ft. over a broken NW. slope.

13.40 Draw, drains N.; asc. 520 ft. over a broken NE. slope.

26.50 Spur, projects N.; desc. 250 ft. over a W. slope.

33.80 Draw, drains N.; asc. 105 ft. over a NE. slope.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 30 and 31.

Over a cross (X) cut in solid sandstone, set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., in a mound of stone, 4 ft. base to top, with, brass cap mkd.

T41S R5E
 $\frac{1}{4}$ S30
S31
1965

Asc. 65 ft. over a NE. slope.

58.50 Spur, projects N.; desc. 110 ft. over a W. slope.

Portion of the Subdivision of T. 41 S., R. 5 E.

CHAINS

- 62.50 Draw, drains N.; asc. 185 ft. over a ledgy NE. slope.
- 78.00 The cor. of secs. 25, 30, 31 and 36, on the W. bdy. of the Tp. monumented, with an iron post, $2\frac{1}{2}$ ins. in diam., set, mkd. and witnessed as recorded in the survey of the W. bdy. of the Tp. in 1958.
- Land, broken desert mountain.
Soil, rocky clay, with a considerable amount of exposed sandstone.
No timber.
Undergrowth, scant shadscale, sagebrush, grass and weeds.
- From the cor. of secs. 29, 30, 31 and 32.
- N. $0^{\circ} 03'$ W., bet. secs. 29 and 30.
- Over desert mountain land; desc. 230 ft. over a N. slope.
- 13.10 Draw, drains N. 10° E.; asc. 35 ft. along an E. clay slope.
- 17.90 Spur, projects E. desc. 115 ft. over a NE. ledgy slope.
- 25.10 Wash, 1.00 ch. wide, 5 ft. deep, in bottom of Last Chanc Canyon, drains SE.; asc. 170 ft. over a S. slope.
- 37.70 Top of rise, slopes W.; desc. 15 ft. along a W. slope.
- 40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 29 and 30.
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins in the ground, with brass cap mkd.

T41S R5E

$$\frac{1}{4}$$

S30	S29
-----	-----

1965

Raise a mound of stone, $3\frac{1}{2}$ ft. base, $2\frac{1}{2}$ ft. high, W. of the cor.

Thence along a gentle W. slope.

- 43.00 Wash, 10 lks. wide, 2 ft. deep, drains SW.; asc. 190 ft. over a SE. ledgy slope.
- 55.00 Top of clay shelf, bears E. and W.; asc. 530 ft. over a ledgy SE. slope.
- 80.00 Point for the cor. of secs. 19, 20, 29 and 30.
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 12 ins in the ground, to solid rock, in a mound of stone, $3\frac{1}{2}$ ft base to top, with brass cap mkd.

T41S R5E

S19	S20
S30	S29

1965

Land, broken desert mountain.

Soil, rocky clay, with exposed and broken sandstone.
No timber.

Portion of the Subdivision of T. 41 S., R. 5 E.

CHAINS	
	Undergrowth, scattered shadscale, sagebrush, grass and weeds.
	From the cor. of secs. 20, 21, 28 and 29. S. 89° 57' W., bet. secs. 20 and 29. Over broken desert mountain land, by triangulation; asc. 720 ft. over a broken E. slope.
26.80	High, spur, projects S.; end of triangulation; desc. 450 ft. over a W. slope.
39.98	Point for the $\frac{1}{4}$ sec. cor. of secs. 20 and 29. Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 18 ins. in the ground, to solid rock, in a mound of stone, 4 ft. base to top, with brass cap mkd. T41S R5E $\frac{1}{4} \frac{S20}{S29}$ 1965
60.00	By triangulation, desc. 830 ft. over a broken W. slope. Deep draw, drains S.; asc. 610 ft. over a broken SE. slope.
79.96	The cor. of secs. 19, 20, 29 and 30. Land, broken desert mountain. Soil, rocky clay, with a considerable amount of exposed and broken sandstone. No timber. Undergrowth, scant shadscale, sagebrush, grass and weeds.
	N. 89° 48' W., bet. secs. 19 and 30. Over broken desert mountain land; asc. 160 ft. over a broken SE. slope.
2.00	High spur, projects S.; desc. 760 ft. over a broken SW. slope.
40.00	Point for the $\frac{1}{4}$ sec. cor. of secs. 19 and 30, falls on a steep clay slope, where the cor. cannot be perpetuated.
40.22	Point selected for the witness $\frac{1}{4}$ sec. cor. of secs. 19 and 30. Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 17 ins. in the ground, to solid rock, in a mound of stone, 3 ft. base to top, with brass cap mkd.

Portion of the Subdivision of T. 41 S., R. 5 E.

CHAINS

T41S R5E

$$\frac{1}{2} \begin{array}{l} \text{S19 W} \\ \text{S30 C} \end{array}$$

1965

Desc. 130 ft. over a W. slope.

49.80 Wash, in bottom of Last Chance Canyon, 1.00 ch. wide, 3 ft. deep, drains SE.; asc. 320 ft. over a E. changing to SE. slope.

77.76 The cor. of secs. 19, 24, 25 and 30, on the W. bdy. of the Tp., monumented with an iron post, 2½ ins. in diam., set, mkd. and witnessed as recorded in the survey of the W. bdy. of the Tp. in 1958.

Land, broken desert mountain.

Soil, rocky clay, with exposed, broken and eroded sandstone.

No timber.

Undergrowth, scant shadscale, sagebrush, grass and weeds.

From the cor. of secs. 19, 20, 29 and 30.

N. 0° 03' W., bet. secs. 19 and 20.

Over broken desert mountain land; asc. 240 ft. over a broken SE. slope.

8.90 Spur ridge, bears NE. and SW.; desc. 480 ft. over a broken NW. changing to a W. slope.

39.00 Draw, drains SW.

40.00 Point for the ½ sec. cor. of secs. 19 and 20.

Set an iron post, 30 ins. long, 2½ ins. in diam., 4 ins. in the ground, to solid rock, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T41S R5E

$$\frac{1}{2} \begin{array}{l} \text{S19} \\ \text{S20} \end{array}$$

1965

Asc. 465 ft. over a broken S. slope.

52.50 Spur, projects SW.; desc. 150 ft. along a W. slope.

64.00 Spur, projects N. 80° W.; desc. 365 ft. over a N. slope.

77.20 Wash, in bottom of deep draw, 30 lks. wide, 1 ft. deep, drains W.; asc. 130 ft. over a ledgy S. slope.

80.00 Point for the cor. of secs. 17, 18, 19 and 20.

Over a cross (X) cut in solid sandstone, set an iron post, 30 ins. long, 2½ ins. in diam., in a mound of stone, 5 ft. base to top, with brass cap mkd.

T41S R5E

$$\begin{array}{l} \text{S18} \text{ | } \text{S17} \\ \text{S19} \text{ | } \text{S20} \end{array}$$

Portion of the Subdivision of T. 41 S., R. 5 E.

CHAINS

The above cor. is set on the N. rim of a box canyon.

Land, broken desert mountain.

Soil, rocky clay, with exposed, broken and eroded sandstone.

No timber.

Undergrowth, scant shadscale, sagebrush, grass and weeds.

From the cor. of secs. 16, 17, 20 and 21.

S. 89° 57' W., bet. secs. 17 and 20.

Over broken desert mountain land; desc. 310 ft. over a W. slope.

10.60 Draw, drains SW.; asc. 65 ft. along a S. slope.

15.60 Spur, projects S.; desc. 195 ft. over a SW. slope.

22.70 Wash, 40 lks. wide, 2 ft. deep, in bottom of deep draw, drains S.; asc. 410 ft. over a ledgy E. slope.

40.03 Point for the $\frac{1}{4}$ sec. cor. of secs. 17 and 20.

Set an iron post, 30 ins. long, 2½ ins. in diam., 6 ins. in the ground to solid rock, in a mound of stone, 3½ ft. base to top, with brass cap mkd.

T41S R5E

$\frac{1}{4}$ $\frac{S17}{S20}$
1965

Asc. 320 ft. over a steep ledgy E. slope.

47.30 Ridge, bears N. and S.; desc. 830 ft. over a badly broken SW. slope.

80.06 The cor. of secs. 17, 18, 19 and 20.

Land, badly broken desert mountain.

Soil, rocky clay, with a considerable amount of broken and exposed sandstone.

No timber.

Undergrowth, scant sagebrush, shadscale, grass and weeds.

N. 89° 48' W., bet. secs. 18 and 19.

Over badly broken desert mountain land; by triangulation desc. 70 ft. over a SW. slope.

8.00 Draw, drains NW.; asc. 160 ft. over a NE. slope.

16.00 Spur, projects N.; desc. 350 ft. over a NW. slope.

35.00 Draw, drains SW.; asc. 120 ft. over a ledgy SE. slope.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 18 and 19, falls on the slope of a ledge, where the cor. cannot be perpetuated.

Portion of the Subdivision of T. 41 S. R. 5 E.

CHAINS

By triangulation; asc. 560 ft. over a badly broken SE. slope.

- 50.20 Point selected for the witness $\frac{1}{2}$ sec. cor. of secs. 18 and 19.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 2 ins. in the ground to solid rock, in a mound of stone, $4\frac{1}{2}$ ft. base, to top, with brass cap mkd.

T41S R5E

$\xrightarrow{\text{S18 W}}$
S19 C

1965

The above cor. is set on top of a high spur, projecting S. End of one triangulation, beginning of another.

Desc. 830 ft. over a ledgy SW. slope.

- 70.30 Wash, 1.00 ch. wide, 4 ft. deep, in bottom of Last Chance Canyon, drains SE.; asc. 70 ft. over a E. slope.

- 77.70 The cor. of secs. 13, 18, 19 and 24, on the W. bdy. of the Tp., monumented with an iron post, $2\frac{1}{2}$ ins. in diam., set, mkd. and witnessed as recorded in the survey of the W. bdy. of the Tp. in 1958.

Land, badly broken desert mountain.

Soil, rocky clay, with exposed broken and eroded sandstone.

No timber.

Undergrowth, scant shadscale, sagebrush, grass and weeds.

From the cor. of secs. 17, 18, 19 and 20.

N. $0^{\circ} 03'$ W., bet. secs. 17 and 18.

Over desert mountain land; asc. 100 ft. over a SW. slope.

- 3.60 Spur, projects W.; desc. 80 ft. over a NW. slope.
- 9.00 Draw, drains W.; asc. 280 ft. over a SW. slope.
- 18.00 Spur, projects W.; desc. 360 ft. over a N. slope.
- 27.50 Draw, drains W.; asc. 440 ft. over a S. changing to a SW. slope.
- 38.40 Top of ascent, on W. slope of knoll; desc. 20 ft. over a NW. slope.
- 40.00 Point for the $\frac{1}{2}$ sec. cor. of secs. 17 and 18.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. in diam., 2 ins. in the ground to solid rock, in a mound of stone, 4 ft. base to top, with brass cap mkd.

Portion of the Subdivision of T. 41 S., R. 5 E.

CHAINS	
	<p style="text-align: center;">T41S R5E $\frac{1}{2}$ S18 S17 1965</p> <p>Desc. 290 ft. over a NW. slope.</p>
51.60	S. rim of deep draw, bears NE. and SW.; desc. 100 ft. over a NW. slope.
54.40	Bottom of draw, drains SW.; asc. 100 ft. over a SE. slope.
64.00	N. rim of draw, bears NE. and SW.; asc. 160 ft. over a SE. slope.
80.00	Point for the cor. of secs. 7, 8, 17 and 18.
	<p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 4 ins. in the ground to solid rock, in a mound of stone, $4\frac{1}{2}$ ft. base to top, with brass cap mkd.</p> <p style="text-align: center;">T41S R5E $\frac{S7 S8}{S18 S17}$ 1965</p> <p>Land, broken desert mountain. Soil, rocky clay, with a considerable amount of exposed and broken sandstone. No timber. Undergrowth, scant shadscale, sagebrush, grass and weeds.</p>
	<p>From the cor. of secs. 8, 9, 16 and 17.</p> <p>N. $89^{\circ} 53'$ W., bet. secs. 8 and 17.</p> <p>Over broken desert mountain land; desc. 450 ft. over a NW. changing to a N. slope.</p>
39.00	Spur, projects S. 85° E; asc. 20 ft. along a S. slope.
40.12	Point for the $\frac{1}{2}$ sec. cor. of secs. 8 and 17.
	<p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 10 ins. in the ground to solid rock, in a mound of stone, 4 ft. base to top, with brass cap mkd.</p> <p style="text-align: center;">T41S R5E $\frac{1}{2} \frac{S8}{S17}$ 1965</p>
	Asc. 30 ft. along a S. slope.
41.60	Spur ridge, projects NW.; desc. 15 ft. over a S. slope.
43.90	Top of rocky knoll; desc. 205 ft. along a N. slope.
58.00	N. slope of knoll; desc. 305 ft. over a W. slope.

Portion of the Subdivision of T. 41 S., R. 5 E.

CHAINS

- 67.60 Wash in bottom of draw, 30 lks. wide, 1 ft. deep, drains SW.; asc. 140 ft. over a SE. slope.
- 80.24 The cor. of secs. 7, 8, 17 and 18.
 Land, broken desert mountain.
 Soil, rocky clay, with broken, exposed sandstone.
 No timber.
 Undergrowth, scant shadscale; sagebrush, grass and weeds.
- N. 89° 58' W., bet. secs. 7 and 18.
 Over broken desert mountain land; asc. 345 ft. over a broken SE. slope.
- 12.60 Ridge, bears NE. and SW.; desc. 135 ft. along a N. slope.
- 37.40 Slope changes to N.; desc. 45 ft.
- 40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 7 and 18.
 Over a cross (X) cut in solid sandstone, set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., in a mound of stone, 4 ft. base to top, with brass cap mkd.
- T41S R5E
 $\frac{1}{4}$ $\frac{S7}{S18}$
 1965
- Desc. 400 ft. over a NW. slope.
- 64.40 Draw, drains SW.; asc. 100 ft. over a ledgy E. slope.
- 77.61 The cor. of secs. 7, 12, 13 and 18, on the W. bdy. of the Tp., monumented with an iron post, $2\frac{1}{2}$ ins. in diam., set, mkd. and witnessed as recorded in the survey of the W. bdy. of the Tp. in 1958.
 Land, broken desert mountain.
 Soil, rocky clay, with a considerable amount of exposed sandstone.
 No timber.
 Undergrowth, scant shadscale, sagebrush, grass and weeds
- From the cor. of secs. 7, 8, 17 and 18.
 N. 0° 03' W., bet. secs. 7 and 8.
 Over broken desert mountain land; asc. 445 ft. over a SE. slope.
- 25.40 Spur, projects W.; desc. 195 ft. over a N. slope.
- 35.92 Point selected for the witness $\frac{1}{4}$ sec. cor. of secs. 7 and 8.

Portion of the Subdivision of T. 41 S., R. 5 E.

CHAINS

Set an iron post, 30 ins. long, 2½ ins. in diam., 8 ins. in the ground to solid rock, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T41S R5E

½
W C
S7↑S8

1965

Desc. 90 ft. over a broken N. slope.

40.00 True point for the ½ sec. cor. of secs. 7 and 8, falls on a steep N. clay slope, where the cor. cannot be perpetuated.

Desc. 50 ft. over a N. slope.

41.00 Draw, drains W.; asc. 300 ft. over a SW. slope.

61.20 Spur, projects W.; desc. 405 ft. over a broken NW. slope.

75.40 Bottom of deep draw, drains SW.; asc. 50 ft. over a SE. slope.

80.00 Point for the cor. of secs. 5, 6, 7 and 8.

Set an iron post, 30 ins. long, 2½ ins. in diam., 8 ins. in the ground to solid rock, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T41S R5E

S6|S5
S7|S8

1965

Land, broken desert mountain.

Soil, rocky clay, with a considerable amount of exposed and broken sandstone.

No timber.

Undergrowth, scattered shadscale, sagebrush, grass and weeds.

From the cor. of secs. 4, 5, 8 and 9.

N. 89° 53' W., bet. secs. 5 and 8.

Over broken desert mountain land; desc. 25 ft. over a gentle N. slope.

5.50 Head of rocky cove, drains SW.; asc. 45 ft. over an E. slope.

15.40 Ridge, bears NE. and SW.; desc. 215 ft. over a NW. slope.

20.10 Bulldozed road, bears NE. and SW.; desc. 195 ft. over a NW. slope.

40.17 Point for the ½ sec. cor. of secs. 5 and 8.

Portion of the Subdivision of T. 41 S., R. 5 E.

CHAINS

Set an iron post, 30 ins. long, 2½ ins. in diam., 10 ins. in the ground to solid rock, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T41S R5E

¼ $\frac{S5}{S8}$
1965

Desc. 200 ft. over a W. slope.

45.00 Bottom of deep draw, drains N.; asc. 150 ft. over a E. slope.

52.00 Spur, projects NW.; desc. 415 ft. over a broken W. slope.

70.30 Wash, 40 lks. wide, 2 ft. deep, in bottom of deep draw, drains SW.; asc. 75 ft. over a SE. slope.

78.60 Spur, projects S.; desc. 40 ft. over a SW. slope.

80.34 The cor. of secs. 5, 6, 7 and 8.

Land, badly broken desert mountain.
Soil, rocky clay, with a considerable amount of exposed sandstone.
No timber.
Undergrowth, scattered shadscale, sagebrush, grass and weeds.

N. 89° 56' W., bet. secs. 6 and 7.

Over broken desert mountain land; desc. 10 ft. over a SW. slope.

1.00 Wash, drains S.; asc. 255 ft. over an E. slope.

7.80 Spur, projects S.; desc. 15 ft. along a S. slope.

12.70 Slope changes to W.; desc. 295 ft.

20.50 Wash, in bottom of draw, 20 lks. wide, 1 ft. deep, drains S.; asc. 105 ft. over an E. slope.

23.90 Spur, projects S.; desc. 105 ft. over a NW. slope.

29.00 Wash, 20 lks. wide, 1 ft. deep, drains S. 80° W.; asc. 130 ft. over a SE. slope.

40.00 Point for the ¼ sec. cor. of secs. 6 and 7.

Set an iron post, 30 ins. long, 2½ ins. in diam., 8 ins. in the ground to solid rock, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T41S R5E

¼ $\frac{S6}{S7}$
1965

Portion of the Subdivision of T. 41 S., R. 5 E.

CHAINS	
	<p>The above cor. is set on a small rise, sloping S.</p> <p>Desc. 30 ft. over a SW. slope.</p>
42.00	Wash, 20 lks. wide, 2 ft. deep, drains SE.; asc. 460 ft. over a E. slope.
61.10	High spur, projects S.; desc. 30 ft. over a W. slope.
77.46	<p>True point for the cor. of secs. 1, 6, 7 and 12, on the W. bdy. of the tp. from which its witness cor., bears N. 14.34 chs. dist., monumented with an iron post, 2½ ins. in diam., set, mkd. and witnessed as recorded in the survey of the W. bdy. of the Tp. in 1958.</p> <p>Land, broken desert mountain. Soil, rocky clay, with a considerable amount of exposed broken sandstone. No timber. Undergrowth, scant shadscale, sagebrush, grass and weeds.</p>
	<p>From the cor. of secs. 5, 6, 7 and 8.</p> <p>N. 0° 03' W., bet. secs. 5 and 6.</p> <p>Over broken desert mountain land; asc. 200 ft. along a SW. slope.</p>
10.00	Spur, projects SE.; asc. 250 ft. along a SE. slope.
29.00	Spur ridge, projects SW.; thence along top of ridge.
40.00	<p>Point for the ½ sec. cor. of secs. 5 and 6.</p> <p>Over a cross (X) cut in solid sandstone, set an iron post, 30 ins. long, 2½ ins. in diam., in a mound of stone, 4 ft. base to top, with brass cap mkd.</p>
	<p style="text-align: center;">T41S R5E ½ S6 S5 1965</p>
42.46	Sandstone ledge, 30 ft. high, faces SW.; desc. 380 ft. over a rocky and broken NW. slope.
66.90	Bottom of deep draw, drains SW.; asc. 165 ft. along an E. slope.
76.70	Top of rise, slopes E.; desc. 25 ft. over a NE. slope.
79.00	Recross deep draw, drains SE.; asc. 15 ft. over a SW. slope.
80.00	Point for the N ₁ /16 sec. cor. of secs. 5 and 6.

Portion of the Subdivision of T. 41 S., R. 5 E.

CHAINS

Over a cross (X) cut in solid sandstone, set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., in a mound of stone, 4 ft. base to top, with brass cap mkd.

T41S R5E

N $\frac{1}{16}$
S6|S5
80
1965

Asc. 165 ft. over a SW. slope.

88.40 Top of bench slopes W.; desc. 50 ft. over a NW. slope.

91.02 Intersect the N. bdy. of the Tp. (Eighth Standard Parallel South).

Point for the closing cor. of secs. 5 and 6.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 4 ins. in the ground, to solid rock, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T40S R5E

S31
S6|S5
C C
T41S R5E
1965

From this cor., the standard cor. of secs. 31 and 32, bears E. 7.72 chs. dist., monumented with an iron post, $2\frac{1}{2}$ ins. in diam., set, mkd. and witnessed as recorded in the survey of the S. bdy. of T. 40 S., R. 5 E. 1958 survey.

Land, broken desert mountain.

Soil, rocky clay, with exposed and broken sandstone.
No timber.

Undergrowth, scattered shadscale, sagebrush, grass and weeds.

Point for the N. $\frac{1}{2}$ sec. cor. of sec. 5, on the N. bdy. of the Tp. at midpoint bet. the closing cors. of secs. 4 and 5 and 5 and 6.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam.; 10 ins. in the ground to solid rock, in a mound of stone, $3\frac{1}{2}$ ft. base to top, with brass cap mkd.

$\frac{1}{2}$ S5
T41S R5E
1965

Portion of the Subdivision of T. 41 S., R. 5 E.

CHAINS

From this cor., the standard $\frac{1}{4}$ sec. cor. of sec. 32, T. 40 S., R. 5 E., bears E. 7.57 chs. dist., marked by an iron post, $2\frac{1}{2}$ ins. in diam., set, mkd. and witnessed as recorded in the survey of the S. bdy. of T. 40 S., R. 5 E. 1958 survey.

Point for the N. $\frac{1}{4}$ sec. cor. of sec. 6, on the N. bdy. of the Tp. at 40.00 chs. west of the closing cor. of secs. 5 and 6.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 6 ins. in the ground to solid rock, in a mound of stone, $3\frac{1}{2}$ ft. base, to top, with brass cap mkd.

 $\frac{1}{4}$ S6
 T41S R5E

1965

From this cor., the standard $\frac{1}{4}$ sec. cor. of sec. 31, T. 40 S., R. 5 E., bears E. 7.72 chs. dist., mkd. by an iron post, $2\frac{1}{2}$ ins. in diam., set, mkd. and witnessed as recorded in the survey of the S. bdy. of T. 40 S., R. 5 E. 1958 survey.

General Description

T. 41 S., R. 5 E., consists of mountainous desert land, of the Smokey Mountain, located about 25 miles NE. of Glen City, Utah. Access to the township is by a graded dirt road from Glenn City, Utah, to Escalante, Utah. There are several bulldozed spur roads, leaving this road, having been used for recent coal exploration within the township. The elevation varies from about 4100 ft. to about 5700 ft. above sea level. There are no permanent habitations within the township. A considerable amount of prospecting for coal, gas and oil has been done, and to some extent is still being carried on in the area.

CERTIFICATE OF SURVEY

I, Craig P. Sylvester, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 30th day of April, 1965, I have surveyed a portion of the subdivision lines completing the subdivision of Township 41 South, Range 5 East

of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

May 12, 1966 (Date)

Craig P. Sylvester (Cadastral Surveyor) SUPERVISORY

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

SUBMITTED FOR APPROVAL Date SEP 28 1967

BUREAU OF LAND MANAGEMENT, Washington, D. C.

The foregoing field notes of the survey of a portion of the subdivisional lines completing the subdivision of Township 41 South, Range 5 East, Salt Lake Meridian, Utah

executed by Craig P. Sylvester, Supervisory Cadastral Surveyor having been critically examined and found correct, are hereby approved.

(Date)

W. E. Brown (Chief, Division of Engineering)

CERTIFICATE OF TRANSCRIPT

I CERTIFY That the foregoing transcript of the field notes of the above described surveys in, is a true copy of the original field notes.

(Date)

(Chief, Division of Engineering)

Blank

Page

Blank

Page

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

167

ORIGINAL

FIELD NOTES

OF THE

DEPENDENT RESURVEY

OF

THE BOUNDARIES OF SECTIONS 19, 20, 21, 22 AND 24

AND

THE SURVEY OF

A PORTION OF THE SUBDIVISION LINES IN THOSE SECTIONS IN

TOWNSHIP 3 SOUTH, RANGE 7 EAST

Of the SALT LAKE Meridian,

in the State of UTAH

EXECUTED BY

FRED R. CHAPPELL

SUPERVISORY CADASTRAL SURVEYOR

Under special instructions dated JUNE 4, 19 65, which provided for the surveys

included under Group Number 482, approved JUNE 8, 1965,


and assignment instructions dated JUNE 8, 19 65.

Survey commenced SEPTEMBER 7, 19 65

Survey completed NOVEMBER 22, 19 65

INDEX DIAGRAM

Township 3 SOUTH, Range 7 EAST

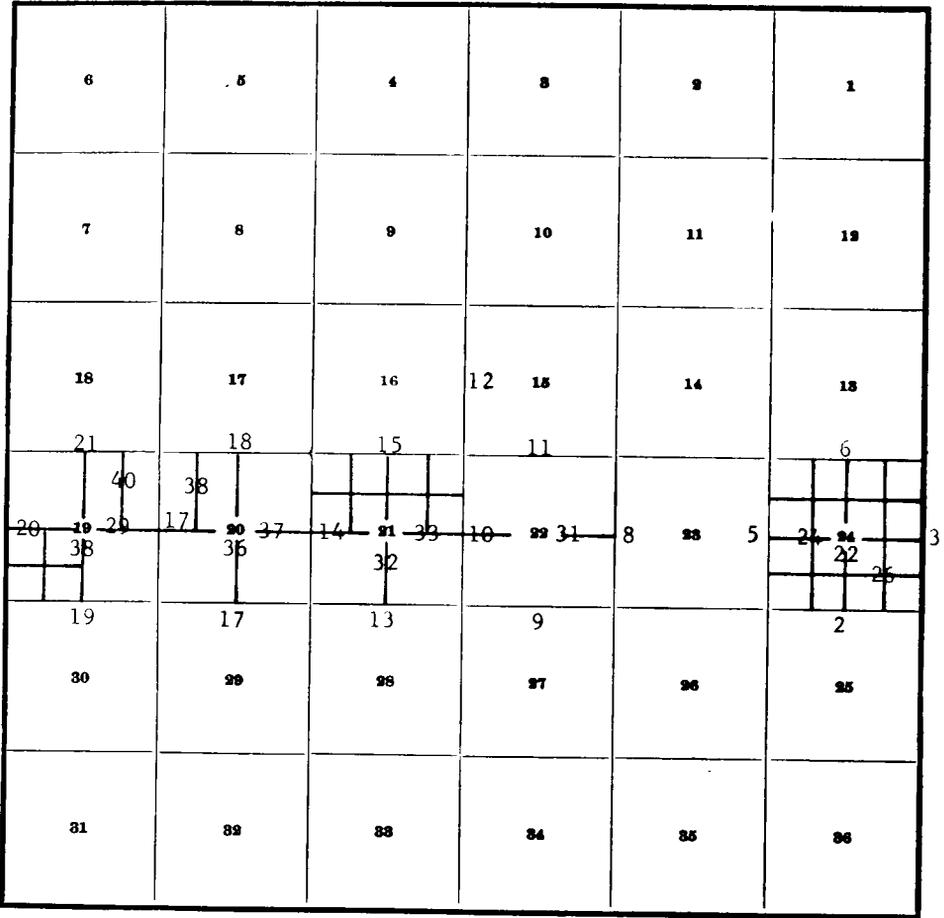

Dependent Resurvey of Boundaries and Subdivision
of a Portion of the Sections in Township 3 South,
Range 7 East, Salt Lake Meridian, Utah

CHAINS

Township 3 South, Range 7 East of the Salt Lake Meridian, Utah, is located within the National Forest. The W. 2 miles of the north boundary were surveyed by Joseph Gorkinski in 1869. In 1891 Nephi Anderson retraced these 2 miles and surveyed the west 4 miles, and in 1923 thru 1931 Ralph Gentry resurveyed the entire boundary. The south and east boundaries were surveyed by Ralph Gentry in 1923-26, and 1925, respectively. The north 3 miles of the west boundary were surveyed in 1869 by Joseph Gorkinski. The west boundary of sec. 19, was surveyed by Nephi Anderson in 1891. The west boundary of secs. 30 and 31, was surveyed in 1901 by A. P. Hanson, and resurveyed by Ralph Gentry in 1923-26. In 1869 Joseph Gorkinski surveyed secs. 5, 6, 7, 8, 17, 18, 19 and 20. In 1891, Nephi Anderson surveyed portions of the north 2/3rds of the township, and in 1923 Ralph Gentry resurveyed several sections and completed the survey of the township. The following field notes are those of the dependent resurvey of the boundaries of secs. 19, 20, 21, 22 and 24, and a survey of a portion of the subdivisional lines in those sections in T. 3 S., R. 7 E.

These surveys were initiated on the official request of the U. S. Forest Service. This subdivision of section survey is designed to form the basis for further subdivision of section surveys to be made by U. S. Forest Service engineers to determine the boundary lines and position of each angle point along the boundary lines between forest and private lands.

The survey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1947, and the special instructions dated June 4, 1965.

Before restoring missing corners, the lines of the original survey were retraced, and a diligent search made for any evidence of the original corners, bearing trees, and other calls of the original field note record. When duly identified the corner positions were remonumented.

The rules of proportionate measurement were applied in order to ascertain the position of lost corners, after completing the necessary retracements to connect with the identified corner locations, but not until exhausting every reasonable possibility of finding direct evidence for the control of each particular corner.

The direction of the lines of the survey were determined by the solar transit method.

The lengths of the lines were determined by chaining, where the lines were accessible; lines inaccessible were run by traverse and triangulation methods. Distances to topography on lines run by triangulation and traverse methods are approximate as scaled from reliable U.S.G.S. topographic sheets, the details of such triangulations or traverses have been thoroughly checked and verified and in order to simplify the record the diagrams and reductions are omitted from these field notes.

Dependent Resurvey of Boundaries and Subdivision
of a Portion of the Sections in Township 3 South,
Range 7 East, Salt Lake Meridian, Utah

CHAINS

The geographic position of the southeast corner of sec. 24 is at Latitude $40^{\circ} 32' 13''$ N. and Longitude $111^{\circ} 05' 20''$ W., as scaled from U.S.F.S. quadrangle sheet "Hoyt Peak."

The magnetic declination was read at a number of stations throughout the survey and the average of the several readings was found to be N. 16° E.

Dependent Resurvey of the survey executed
by Ralph Gentry in 1925 and 1926

From the cor. of secs. 23, 24, 25 and 26, monumented with an iron post, 2 ins. in diam., conforming to the record.

N. $89^{\circ} 39'$ E., bet. secs. 24 and 25.

Over mountainous land, through medium dense timber and scattered undergrowth; desc. 25 ft. over a gentle E. slope.

8.00 Timber becomes scattered, enter dense undergrowth; desc. 600 ft. over a broken E. slope.

19.988 Point for the W. $1/16$ cor. of secs. 24 and 25, at proportionate dist.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 20 ins. in the ground, with brass cap mkd.

W $\frac{1}{16}$ $\frac{S24}{S25}$
1965

from which

An aspen, 5 ins. in diam., bears S. $36^{\circ} 45'$ E., 20 lks. dist., mkd. W $1/16$ S25 BT.

An aspen, 5 ins. in diam., bears N. $31^{\circ} 30'$ W., 25 lks. dist., mkd. W $1/16$ S24 BT.

Desc. 525 ft. over a broken E. slope.

33.80 South Fork of the Provo River, 15 lks. wide, 2 ft. deep, flows NW.; asc. 30 ft. over a NW. slope.

37.90 Gravel road, bears irregularly NE. and S.; asc. 30 ft. over a NW. slope.

39.976 The $\frac{1}{4}$ sec. cor. of secs. 24 and 25, monumented with an iron post, 1 inch in diam., conforming to the record.

East, beginning new measurement.

Dependent Resurvey of a Portion of the
Subdivision of T. 3 S., R. 7 E.

CHAINS	
	Over mountainous land, through dense aspen and scattered pine; asc. 175 ft. over a NW. slope.
17.70	Jeep road, bears irregularly NW. and SE.; thence along a N. slope.
19.745	Point for the E. 1/16 cor. of secs. 24 and 25, at proportionate dist. Set an iron post, 30 ins. long, 2½ ins. in diam., 15 ins. in the ground, to solid rock, and in a mound of stone, 4 ft. base to top, with brass cap mkd. E $\frac{1}{16}$ $\frac{S24}{S25}$ 1965 from which An aspen 4 ins. in diam., bears S. 41° 15' E., 38 lks. dist., mkd. E 1/16 S25 BT. An aspen 5 ins. in diam., bears N. 18° 45' W., 31 lks. dist., mkd. E 1/16 S24 BT.
19.90	Swale, drains NW.; asc. 80 ft. over a NW. slope.
28.10	Underground natural gas line, bears N. 59° 35' W. and S. 59° 35' E.; asc. 70 ft. along a NW. slope.
29.70	Spur, projects N. 60° W.; asc. 45 ft. along a N. slope.
39.72	The closing cor. of secs. 24 and 25, monumented with an iron post, 2 ins. in diam., conforming to the record. Land, mountainous. Soil, rocky, mountain loam. Timber, patches of dense aspen, pine and fir. Undergrowth, medium dense oak, service berry and willows.
	N. 0° 07' W., along the E. bdy. of sec. 24. Over mountainous land, through dense timber; desc. 20 ft. over a N. slope.
2.79	The cor. of secs. 19 and 30, monumented with an iron post, 2 ins. in diam., conforming to the record. Desc. 186 ft. over a N. changing to NW. slope.
11.30	Draw, stream in bottom, 3 lks. wide, 2 ins. deep, flows S. 60° W.; asc. 155 ft. over a SW. slope.
16.60	Spur, projects S. 60° W., timber becomes scattered, enter dense undergrowth; desc. 31 ft. over a NW. slope.
20.053	Point for the S. 1/16 cor. of sec. 24, at proportionate dist.

4

Dependent Resurvey of a Portion of
the Subdivision of T. 3 S., R. 7 E.

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins. in the ground, with brass cap mkd.

S $\frac{1}{16}$ |
S24 |
1965

from which

An aspen, 8 ins. in diam., bears N. 83° W., 17 lks. dist., mkd. S1/16 S24 BT.

Desc. 30 ft. over a NW. slope.

24.70 Spring of clear water, 1 lk. wide 1 in. deep, flows NW.; desc. 36 ft. over a broken NW. slope.

34.80 Timber becomes dense; desc. 47 ft. over a NW. slope.

40.106 The E $\frac{1}{2}$ sec. cor. of sec. 24, monumented with an iron post, 1 inch in diam., conforming to the record.

—————

N. $0^\circ 04'$ W., beginning new measurement.

Over mountainous land, through dense timber; desc. 45 ft. over a NW. slope.

2.65 The $\frac{1}{4}$ sec. cor. of sec. 19, monumented with an iron post, 1 inch in diam., conforming to the record.

Desc. 250 ft. over a NW. slope.

17.50 Noblett Creek, 15 lks. wide, 1 ft. deep, flows S. 60° W.; timber becomes scattered; asc. 78 ft. over a SW. slope.

19.935 Point for the N. 1/16 cor. of sec. 24, at proportionate dist.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 22 ins. in the ground, with brass cap mkd.

N $\frac{1}{16}$ |
S24 |
1965

Raise a mound of stone, 4 ft. base, 3 ft. high, W. of the cor.

Asc. 248 ft. over a SW. slope, through scattered timber and dense undergrowth.

39.870 The closing cor. of secs. 13 and 24, monumented with an iron post, 2 ins. in diam., conforming to the record.

Dependent Resurvey of a Portion of
the Subdivision of T. 3 S., R. 7 E.

CHAINS

Land, mountainous.
Soil, rocky, mountain loam.
Timber, patches of dense pine fir and aspen.
Undergrowth, medium dense oak, service berry and sagebrush.

From the cor. of secs. 23, 24, 25 and 26.

N. 0° 16' W., bet. secs. 23 and 24.

Over mountainous land, through medium timber, and medium dense undergrowth; desc. 170 ft. over a NE. slope.

13.00 Enter dense timber; desc. 182 ft. over a NE. slope.

19.993 Point for the S. 1/16 cor. of secs. 23 and 24, at proportionate dist.

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.

S $\frac{1}{16}$
S23|S24
1965

from which

An aspen, 3 ins. in diam., bears N. 77° E., 31 lks. dist., mkd. S1/16 S24 BT.

A pine, 24 ins. in diam., bears S. 80° W., 39 lks. dist., mkd. S1/16 S23 BT.

Desc. 275 ft. over a NE. slope.

39.986 The ¼ sec. cor. of secs. 23 and 24, monumented with an iron post, 1 in. in diam., conforming to the record.

N. 0° 30' E., beginning new measurement.

Over mountainous land, through medium dense timber; desc. 20 ft. over a NE. slope.

7.40 Underground natural gas line, bears N. 41° 15' W. and S. 41° 15' E., desc. 224 ft. over a NE. slope.

20.099 Point for the N. 1/16 cor. of secs. 23 and 24, at proportionate dist.

Set an iron post, 30 ins. long, 2½ ins. in diam., 15 ins. in the ground, to solid rock and in a mound of stone, 3 ft. base, to top, with brass cap mkd.

N $\frac{1}{16}$
S23|S24
1965

Dependent Resurvey of a Portion of
the Subdivision of T. 3 S., R. 7 E.

CHAINS

from which

A pine, 14 ins. in diam., bears N. 69° E., 29 lks.
dist., mkd. N1/16 S24 BT.

A pine, 14 ins. in diam., bears N. 65° W., 33 lks.
dist., mkd. N1/16 S23 BT.

Desc. 155 ft. over a N. slope.

27.60 Barbed and woven wire fence, bears N. 30° W., and S. 30°
E.; desc. 45 ft. over a N. slope.

30.148 Point for the NN1/64 cor. of secs. 23 and 24, at pro-
portionate dist.

Set a 1 in. T-iron stake, 24 ins. long, 15 ins. in the
ground, and in a mound of stone, 3 ft. base to top, with
cadmium plated cap mkd.

NN
1
64
S23 | S24
1965

Desc. 42 ft. over a N. slope.

35.173 Point for the NNN1/256 cor. of secs. 23 and 24, at pro-
portionate dist.

Set a 1 in. T-iron stake, 24 ins. long, 12 ins. in the
ground, and in a mound of stone, 3 ft. base to top, with
cadmium plated cap mkd.

NNN
1
256
S23 | S24
1965

Desc. 67 ft. over a N. slope.

38.00 Enter dense willows in river bottom.

40.198 The cor. of secs. 13, 14, 23 and 24, monumented with an
iron post, 2 ins. in diam., conforming to the record.

Land, mountainous.

Soil, rocky, mountain loam.

Timber, dense aspen, pine and fir.

Undergrowth, medium dense oak, service berry, with dense
willows in the river bottom.

N. 89° 57' E., bet. secs. 13 and 24.

Over river bottom land, through dense willows.

7.20 South Fork of the Provo River, 23 lks. wide, 1 ft. deep,
flows N. 80° W.

Dependent Resurvey of a Portion of
the Subdivision of T. 3 S., R. 21 E.

CHAINS

9.97 Point for the NW 1/6 cor. of secs. 13 and 14, at proportionate dist.

Set a 1 in. T-iron stake, 24 ins. long, 1/2 in. in diam., in the ground, and in a mound of stone, 3 ft. base to top, with cadmium plated cap mkd.

S13

NW $\frac{1}{6}$
54

S. 4

1965

10.70 Noblett Creek, 15 lbs. wide, 1 ft. deep, flows NW. 10 ft. over a SW. slope.

14.60 Barbed and woven wire fence, bears NW. and SE.

15.80 Graveled road, bears irregularly NW. and SE.; enters creek willows, enter oak brush; asc. 116 ft. along a S. slope.

19.941 Point for the W 1/16 cor. of secs. 13 and 14, at proportionate dist.

Set an iron post, 30 ins. long, 2 1/2 ins. in diam., 1/2 in. in the ground, to solid rock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

W $\frac{1}{16}$ S13
16 S14

1965

Asc. 436 ft. along a S. slope.

39.882 The E. sec. cor. of secs. 13 and 14, monument to be set by iron post, 1 in. in diam., conforming to the corner.

N. 89° 57' E., beginning new measurement.

Over mountainous land, through fence undergrowth and scattered timber; asc. 95 ft. along a S. slope.

6.60 Top of rise; desc. 25 ft. along a SE. slope.

10.20 Small draw, drains S.; asc. 90 ft. over a SW. slope and enter dense timber.

19.523 Point for the E 1/16 cor. of secs. 13 and 14, at proportionate dist.

Set an iron post, 30 ins. long, 2 1/2 ins. in diam., 1/2 in. in the ground, to solid rock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

Dependent Resurvey of a Portion of
the Subdivision of T. 3 S., R. 7 E.

CHAINS	
	$E \frac{1}{16} \frac{S13}{S24}$ 1965
	from which
	A douglas fir, 14 ins. in diam., bears N. 21° E., 40 lks. dist., mkd. E1/16 S13 BT.
	A red cedar, 5 ins. in diam., bears S. 43° 30' W., 8 lks. dist., mkd. E1/16 S24 BT.
	Asc. 10 ft. over a SW. slope.
36.20	Draw, drains S.; asc. 40 ft. over a SW. slope.
39.496	The closing cor. of secs. 13 and 24, hereinbefore described.
	Land, mountainous. Soil, rocky, mountain loam. Timber, patches of dense pine, firm, scattered aspen and cedar. Undergrowth, areas of dense willows, oak and service berry.
	From the cor. of secs. 22 and 23, monumented with an iron post, 1 ins. in diam., conforming to the record.
	North, bet. secs. 22 and 23.
	Over mountainous land, through dense timber; desc. 65 ft. along an E. slope.
3.90	Rock slide, 3 chs. wide, slopes E.; desc. 303 ft. over an E. slope.
24.50	Slope changes to NE.; desc. 282 ft.
40.28	The 1/2 sec. cor. of secs. 22 and 23, monumented with an iron post, 1 in. in diam., conforming to the record.
	—————
	N. 0° 04' E., beginning new measurement.
	Over nearly level mountainous land, through scattered timber and medium dense undergrowth.
.60	Dirt road, bears NW. and SE.
8.00	Stream, 4 lks. wide, 3 ins. deep, flows SW.
8.50	Dirt road, bears NW. and SE.
13.00	Recross road, bears NE. and SW.
17.20	Recross road, bears NW. and SE.; desc. 45 ft. over a gentle S. slope.

Dependent Resurvey of a Portion of
the Subdivision of T. 3 S., R. 7 E.

CHAINS	
20.40	Recross road, bears NE. and SW.
33.90	Recross road, bears NW. and SE.
36.23	Pipe line, bears E. and W.
36.50	Recross road, bears NE. and SW.; asc. 35 ft. over a S. slope.
40.53	The cor. of secs. 14, 15, 22 and 23, monumented with an iron post, 2 ins. in diam., conforming to the record.
	<p>Land, gently rolling mountainous. Soil, rocky, mountain loam. Timber, patches of medium dense aspen, pine and fir. Undergrowth, medium dense, oak, service berry and sagebrush.</p>
	From the cor. of secs. 22 and 23.
	West, along the S. bdy. of sec. 22.
	Over mountainous land, through dense timber and scattered undergrowth; asc. 210 ft. over a E. slope.
17.50	Spur, projects N.; desc. 188 ft. over a NW. slope.
29.90	Leave timber, enter rock slide; desc. 180 ft. over a NW. slope.
35.00	Leave rock slide, enter aspen timber; desc. 180 ft. over a NW. slope.
39.01	The $\frac{1}{2}$ sec. cor. of sec. 27, monumented with an iron post, 1 in. in diam., conforming to the record.
40.14	The $\frac{1}{2}$ sec. cor. of sec. 22, monumented with an iron post, 1 in. in diam., conforming to the record.
	S. $89^{\circ} 52' W.$, beginning new measurement.
	Over mountainous land, through dense timber and medium undergrowth; desc. 160 ft. over a NW. slope.
8.50	Gully, drains N. $45^{\circ} W.$; desc. 280 ft. over a NW. slope.
24.34	Trail, bears irregularly NE. and SW.; desc. 60 ft. over a NW. slope.
29.30	Little South Fork of the Provo River, 15 lks. wide, 8 ins. deep, flows NE.; asc. 210 ft. over a SE. slope, through dense undergrowth.
39.09	The closing cor. of secs. 27 and 28, monumented with an iron post, 2 ins. in diam., conforming to the record.
40.16	The cor. of secs. 21 and 22, monumented with an iron post, 2 ins. in diam., conforming to the record.

Dependent Resurvey of a Portion of
the Subdivision of T. 3 S., R. 7 E.

CHAINS

Land, mountainous.
Soil, rocky mountain loam.
Timber, dense to scattered aspen, pine and fir.
Undergrowth, patches of dense oak, choke cherry and
service berry.

N. 0° 03' W., bet. secs. 21 and 22.

Over mountainous land, through dense undergrowth; asc.
185 ft. over a SE. slope.

- 5.30 Slope, changes to E.; asc. 412 ft.
- 25.20 Rocky spur, projects E.; desc. 557 ft. over a N. slope,
through dense undergrowth, and scattered timber.
- 41.14 The $\frac{1}{2}$ sec. cor. of secs. 21 and 22, monumented with an
iron post, 1 in. in diam., conforming to the record.
-
- N. 0° 06' W., beginning new measurement.
- Over mountainous land, through dense timber; desc. 80 ft.
over a N. slope.
- 2.10 Leave timber, enter rock slide; desc. 95 ft. over a N.
slope.
- 7.10 Leave rock slide, enter scattered timber.
- 7.96 Foundation of summer home now under construction. SW.
cor. of foundation bears W. 10 lks. dist.; desc. 15 ft.
over a NE. slope.
- 10.73 Dirt road, leading to summer homes, bears NW. and SE.;
desc. 100 ft. over a N. slope.
- 17.70 Dirt road, leading to summer homes, bears NE. and SW.;
desc. 45 ft. over a N. slope.
- 20.02 Point for the N. 1/16 cor. of secs. 21 and 22, at pro-
portionate dist.
- Cor. point, falls on the S. edge of private road, and
is on private property; cor. point not monumented.
- 20.10 Center of dirt road, bears NW. and SE.; desc. 80 ft.
over a N. slope.
- 25.04 Center of dirt road, leading to summer homes, bears E.
and W.; enter river bottom land, dense willows.
- 25.40 Little South Fork of the Provo River, 15 lks. wide, 1 ft.
deep, flows NW.
- 27.54 Fence, bears E. and W.
- 35.60 Fence, bears NE. and SW.

Dependent Resurvey of a Portion of
the Subdivision of T. 3 S., R. 7 E.

CHAINS	
37.20	Dirt road, bears NE. and SW.
38.30	Left bank, of the Provo River, 2.00 chs. wide, 6 ins. deep, flows S. 80° W.
40.04	<p>Point for the cor. of secs. 15, 16, 21 and 22, at proportionate dist., falls in the Provo River, and cannot be perpetuated; there is no remaining evidence of the original cor. A considerable amount of work has been done in the area, such as building of roads and retention dikes for the river.</p> <p>Land, mountainous. Soil, rocky, mountain loam. Timber, patches of dense pine and aspen. Undergrowth, dense oak, service berry, choke cherry, with dense willows over part of the river bottom land.</p>
	From the cor. of secs. 14, 15, 22 and 23.
	N. 89° 58' W., bet. secs. 15 and 22.
	Over mountainous land, through dense timber, and medium undergrowth; desc. 30 ft. over a W. slope.
4.20	Swale, drains N., also gate in fence, bears N. and S.; asc. 35 ft. over an E. slope.
9.60	Leave timber, enter medium dense undergrowth; asc. 55 ft. over an E. slope.
12.80	Low spur, projects S.; desc. 165 ft. over a W. slope.
23.80	Enter aspen timber; desc. 80 ft. over a W. slope.
34.84	Fence, bears NE. and SW.
34.90	Ditch, drains NE.
36.70	Leave aspen timber.
40.26	The $\frac{1}{2}$ sec. cor. of secs. 15 and 22, monumented with an iron post, 1 in. in diam., conforming to the record.
	N. 89° 32' W., beginning new measurement.
	Over nearly level meadow land.
8.80	Irrigation ditch, drains N.
11.55	Irrigation ditch, drains N.
16.85	Dirt road, bears NE. and SW.
17.90	Enter dense willows.

Dependent Resurvey of a Portion of
the Subdivision of T. 3 S., R. 7 E.

CHAINS

- 29.34 Fence, bears N. and S.
- 29.80 Stream, 30 lks. wide, 18 ins. deep, flows S. 45° W.
- 30.40 Dirt road, bears NE. and SW.
- 33.59 Left bank, of the Provo River, 6 ins. deep, flows S. 80° W.
- 40.17 True point for the cor. of secs. 15, 16, 21 and 22.
- Land, mountainous the first ½ mile, mountain meadow the balance.
Soil, rocky mountain loam.
Timber, patches of dense pine, and aspen the first ½ mile
widely scattered pine the balance.
Undergrowth, medium oak and service berry the first ½
mile, areas of dense willows along the river bottom land.
-
- From the true point for the cor. of secs. 15, 16, 21 and 22, in the Provo River.
- North, bet. secs. 15 and 16.
- .40 Right bank of the Provo River.
- .49 Point selected for the witness cor. of secs. 15, 16, 21 and 22.
- Set an iron post, 30 ins. long, 2½ ins. in diam., 30 ins. in the rock retention dike, on the N. bank of the Provo River, brass cap of iron post, mkd.
- T3N R7E
W C
S16 | S15
S21 | S22
↓
1965
- 1.00 Road, leading to summer homes, bears NE. and SW.
- 2.67 SW. cor. of summer home.
- 4.98 Fence, at gate, bears E. and W.
- 16.40 Irrigation ditch, drains W.
- 21.94 Fence, bears N. 51° 15' E., and S. 51° 15' W.
- 22.91 Center of improved gravel road, bears N. 51° 15' E. and S. 51° 15' W.
- 23.84 Fence, parallel to road. Asc. 79 ft, over a S. slope, through medium dense undergrowth.

Dependent Resurvey of a Portion of
the Subdivision of T. 3 S., R. 7 E.

CHAINS

- 29.60 Farm road, bears SE. and NW.
- 31.53 Fence bears N. 60° E. and S. 60° W., enter cultivated farm land.
- 40.04 Point for the $\frac{1}{2}$ sec. cor. of secs. 15 and 16, at proportionate dist., there is no remaining evidence of the original cor.
Cor. point falls on edge of farm road in cultivated field, cor. point not monumented.
- 44.00 Irrigation ditch, drains SW.
- 53.20 Leave farm land; asc. 20 ft. over a SE. slope, through dense undergrowth.
- 55.45 Irrigation ditch, drains W.; asc. 62 ft. over a SE. slope.
- 60.80 Fence cor. bears E. and N.; thence along fence line.
- 64.96 Cor. of fences, S. and W.
- 76.30 Farm road, bears E. and W.; asc. 47 ft. over a SE. slope.
- 80.08 The cor. of secs. 9, 10, 15 and 16, monumented with a sandstone, 18x8x5 ins. firmly set in the ground, and mkd. with 3 notches on the E. and 4 notches on the S. edges, and witnessed by a small mound of stone, W. of the cor.
At the cor. point
Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins. in the ground, with brass cap mkd.
- T3S R7E
S9 | S10
S16 | S15
1965
- Land, river bottom and gently rolling mountainous farm and pasture.
Soil, sandy, clay loam.
Timber, widely scattered pine and aspen the first 15.00 chs., no timber the balance.
Undergrowth, patches of medium dense oak, service berry and sagebrush.
- From the cor. of secs. 21 and 22, previously described.
S. 89° 58' W., along the S. bdy. of sec. 21.
Over mountainous land, through dense undergrowth; asc. 207 ft. over a SE. slope.
- 19.80 Ledge 15 ft. high, bears NE. and SW.; desc. 45 ft. along a S. slope.

Dependent Resurvey of a Portion of
the Subdivision of T. 3 S., R. 7 E.

CHAINS

- 36.40 Draw, drains SE.; asc. 118 ft. over an E. slope.
- 39.07 The $\frac{1}{4}$ sec. cor. of sec. 28, monumented with an iron post, 1 in. in diam., conforming to the record.
- Asc. 45 ft. over an E. slope.
- 40.40 The $\frac{1}{4}$ sec. cor. of sec. 21, monumented with an iron post, 1 in. in diam., conforming to the record.
-
- S. 89° 53' W., beginning new measurement.
- Over broken mountainous land; asc. 107 ft. over an E. slope.
- 4.40 Slope changes to SE.; asc. 76 ft.
- 20.40 Unimproved dirt road, to the Little South Fork of the Provo River, bears irregularly N. and S.; enter dense aspen timber; asc. 60 ft. over a SE. slope.
- 30.70 Spur, projects N.; leave timber, enter dense sagebrush; desc. 88 ft. over a NW. slope.
- 37.20 Enter pine and aspen timber; desc. 15 ft. along a NW. slope.
- 38.70 The closing cor. of secs. 28 and 29, monumented with an iron post, 2 ins. in diam., conforming to the record.
- 40.02 The SW. cor. of sec. 21, monumented with an iron post, 2 ins. in diam., conforming to the record.
- Land, mountainous.
Soil, rocky clay.
Timber, groves of dense aspen, pine and fir.
Undergrowth, medium dense oak, service berry and sagebrush.
-
- N. 0° 02' W., along the W. bdy. of sec. 21.
- Over mountainous land, through medium dense timber; desc. 20 ft. over a NW. slope.
- 1.24 The SE. cor. of sec. 20, monumented with an iron post, 2 ins. in diam., conforming to the record.
- Thence; bet. secs. 20 and 21, with continuous measurement.
- Desc. 40 ft. over a NW. slope.
- 3.23 Old fence, bears irregularly NE. and SW.; desc. 20 ft. over a NW. slope.

Dependent Resurvey of a Portion of
the Subdivision of T. 3 S., R. 7 E.

CHAINS	
4.70	Draw, drains NW.
6.30	Unimproved dirt road, to Little South Fork of the Provo River, bears N. 60° W. and S. 60° E.; asc. 75 ft. over a S. slope.
13.20	Spur, projects W.; desc. 347 ft. over a N. changing to NW. slope.
41.40	The ½ sec. cor. of secs. 20 and 21, monumented with an iron post, 1 in. in diam., conforming to the record.
	<p style="text-align: center;">—————</p> N. 0° 17' W., beginning new measurement.
	Over mountainous land, through dense timber; desc. 68 ft. over a N. slope.
7.20	Swale, drains NW.; asc. 30 ft. over a SW. slope.
10.70	Spur, projects W.; desc. 186 ft. over a NE. slope.
19.83	Point for the N1/16 cor. of secs. 20 and 21, at proportionate dist.
	Set an iron post, 30 ins. long, 2½ ins. in diam., 18 ins. in the ground, to solid rock and in a mound of stone, 3 ft. base, to top, with brass cap mkd.
	<p style="text-align: center;"> N1 16 S20 S21 1965 </p>
	Desc. 140 ft. over a NE. slope.
33.00	Small draw, drains N. 75° E.; asc. 25 ft. over a SE. slope.
35.40	Small spur, projects NE.; desc. 105 ft. over a NE. slope.
39.66	The cor. of secs. 16, 17, 20 and 21, monumented with an iron post, 2 ins. in diam., conforming to the record.
	Land, mountainous. Soil, rocky, mountain loam. Timber, patches of dense pine, fir and aspen. Undergrowth, scattered chokecherry, service berry and sagebrush.
	From the true point for the cor. of secs. 15, 16, 21 and 22, in the Provo River.
	S. 89° 50' W., bet. secs. 16 and 21.
2.70	Right bank of the Provo River, course SW.; then over meadow land; that is private property and has been subdivided into sites for summer homes.

Dependent Resurvey of a Portion of
the Subdivision of T. 3 S., R. 7 E.

CHAINS

- 20.13 Point for the E1/16 cor. of secs. 16 and 21, at proportionate dist.
Cor. point, falls on private property and is not monumented.
- 31.00 Foot of bench, bears SW. and NE.; asc. 25 ft.
- 33.00 Top of bench.
- 33.66 Barbed wire fence, curves NE. to NW.; then inside highway right of way.
- 40.26 The $\frac{1}{2}$ sec. cor. of secs. 16 and 21, monumented with an iron post, 1 in. in diam., conforming to the record.
-
- S. 89° 44' W., beginning new measurement.
- Over highway right of way.
- 6.50 Barbed wire fence, curves NW. to NE.; desc. 45 ft. over a SW. slope.
- 13.30 Dirt road, leading to summer homes, bears N. and S., base of descent; then over river bottom land, through scattered timber and medium undergrowth.
- 15.20 Barbed wire fence, bears N. and S.
- 18.70 Recross dirt road, bears NW. and SE.
- 20.17 Point for the W1/16 cor. of secs. 16 and 21.
Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. in diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.
- W $\frac{1}{16}$ $\frac{S16}{S21}$
1965
- 26.90 Right bank of the Provo River, 1.70 chs. wide, 18 ins. deep, flows N. 45° W.
- 28.72 Flume pipe, bears NW. and SE.; asc. 105 ft. over a broken NE. slope.
- 30.50 Rim of bench, bears NW. and SE.; asc. 45 ft. along a NE. slope.
- 40.34 The cor. of secs. 16, 17 20 and 21, hereinbefore described.
Land, mountainous and river bottom.
Soil, rocky, mountain loam.
Timber, areas of dense aspen, pine and fir.
Undergrowth, dense service berry, choke cherry and oak.
- From the SE. cor. of sec. 20.

Dependent Resurvey of a Portion of
the Subdivision of T. 3 S., R. 7 E.

CHAINS	
	<p>S. 89° 52' W., along the S. bdy. of sec. 20.</p> <p>Over mountainous land, through dense timber, and medium dense undergrowth; desc. 125 ft. over a NW. slope.</p>
20.70	Stock pond, 40 lks. wide, in bottom of draw, drains N.; asc. 65 ft. over a NE. slope.
25.50	Barbed wire fence, bears N. 45° E. and S. 45° W.; asc. 35 ft. over a NE. slope.
32.80	Spur, projects N.; desc. 45 ft. over a NW. slope.
38.56	The ½ sec. cor. of sec. 29, monumented with an iron post, 1 in. in diam., conforming to the record.
40.38	The ½ sec. cor. of sec. 20, monumented with an iron post, 1 in. in diam., conforming to the record.
	<p style="text-align: center;">—————</p> <p>S. 89° 45' W., beginning new measurement.</p> <p>Over mountainous land, through scattered timber and dense undergrowth; desc. 85 ft. over a NW. slope.</p>
7.00	Small draw, drains NW.; asc. 25 ft. over a NE. slope.
10.30	Small spur, projects N.; desc. 478 ft. over a NW. slope, through scattered aspen timber and medium dense sagebrush.
38.02	The closing cor. of secs. 29 and 30, monumented with an iron post, 2 ins. in diam., conforming to the record.
40.36	The cor. of secs. 19 and 20, monumented with an iron post, 2 ins. in diam., conforming to the record.
	<p>Land, mountainous.</p> <p>Soil, rocky, mountain loam.</p> <p>Timber, scattered patches of dense aspen, fir and pine.</p> <p>Undergrowth, medium dense, sagebrush, service berry and choke cherry.</p>
	<p>N. 0° 16' W. bet. secs. 19 and 20.</p> <p>Over mountainous land, through scattered timber, and medium dense undergrowth; desc. 40 ft. along a NW. slope.</p>
11.14	Unimproved dirt road, bears irregularly S. 30° W. and N. 30° E.; desc. 40 ft. over a NW. slope.
17.30	Small draw, drains SW.; asc. 35 ft. over a SW. slope.
24.50	Top of rise, slopes W.; desc. 35 ft. over a W. slope.
30.90	Old irrigation ditch, drains S. 10° W.; desc. 70 ft. over a NW. slope.
40.26	Barbed wire fence, bears E. and W.

Dependent Resurvey of a Portion of
the Subdivision of T. 3 S., R. 7 E.

CHAINS

- 40.28 The $\frac{1}{2}$ sec. cor. of secs. 19 and 20, monumented with an iron post, 1 in. in diam., conforming to the record.
-
- N. $0^{\circ} 11'$ W., beginning new measurement.
- Over gently rolling mountainous land, through scattered clumps of aspen timber, and dense undergrowth; desc. 63 ft. over a NW. slope.
- 17.40 Wash, drains, S. 20° W.; desc. 90 ft. over a NW. slope.
- 33.90 Ditch, drains N. 20° W.
- 37.30 Ditch, drains S. 45° W.
- 39.89 Fence, bears N. and S.
- 40.02 The cor. of secs. 17, 18, 19 and 20, monumented with an iron post, 2 ins. in diam., conforming to the record.
- Land, rolling mountainous.
Soil, rocky mountain loam.
Timber, scattered clumps of aspen.
Undergrowth, dense sagebrush, medium service berry, and oak.
-
- From the cor. of secs. 16, 17, 20 and 21, previously described.
- N. $89^{\circ} 24'$ W., bet. secs. 17 and 20.
- Over mountainous land, through scattered timber and dense undergrowth; asc. 115 ft. over a NE. slope.
- 9.90 Spur, projects N.; desc. 70 ft. over a NW. slope.
- 18.03 Trail, bears NE. and SW.; desc. 90 ft. over a NW. slope.
- 19.00 Draw, drains N.; asc. 10 ft. over a NE. slope.
- 20.03 Water pipe line, drains, N. 20° E., water tank, bears S. 20° W., 32 lks. dist. Asc. 108 ft. over a NE. slope.
- 24.40 N. slope of small knoll; desc. 25 ft. along a N. slope.
- 28.31 Barbed wire fence, bears N. and S.; desc. 100 ft. along a N. slope.
- 37.18 Barbed wire fence, bears S. 70° E. and W.; desc. 43 ft. over a N. slope.
- 40.68 The $\frac{1}{2}$ sec. cor. of secs. 17 and 20, monumented with an iron post, 1 in. in diam., conforming to the record.
-
- S. $89^{\circ} 50'$ W., beginning new measurement.

Dependent Resurvey of a Portion of
the Subdivision of T. 3 S., R. 7 E.

CHAINS	
	Over mountainous land, through medium dense timber; desc. 20 ft. along a N. slope.
3.24	Fence, bears N. 35° E. and S. 55° W.; desc. 75 ft. along a N. slope.
11.60	Leave timber; continue along a N. slope.
20.10	Point for the W1/16 cor. of secs. 17 and 20, at proportionate dist.
	Set an iron post, 30 ins. long, 2½ ins. in diam., 18 ins. in the ground and in a mound of stone, 3 ft. base, to top, with brass cap mkd.
	$W \frac{1}{16} \quad \frac{S17}{S20}$ 1965
	Slope, changes to W.; desc. 197 ft.
37.45	Ditch, drains SW.; desc. 15 ft. over a W. slope.
38.50	Fence, bears N. 80° E. and S. 80° W.
40.20	The cor. of secs. 17, 18, 19 and 20.
	Land, rolling mountain. Soil, rocky, mountain loam. Timber, patches of medium dense aspen and pine. Undergrowth, dense oak, sagebrush and service berry.
	From the cor. of sec. 19 and 20.
	N. 88° 46' W., along the S. bdy. of sec. 19.
	Over mountainous land; desc. 150 ft. over a W. slope, through dense undergrowth.
15.00	Unimproved dirt road, bears irregularly N. and S.; desc. 50 ft. over a W. slope.
23.00	Stream, 5 lks. wide, 4 ins. deep, flows NE.; asc. 450 ft. over an E. slope.
37.96	The ¼ sec. cor. of sec. 30, monumented with an iron post, 1 in. in diam., conforming to the record.
	Asc. 80 ft. over an E. slope.
40.88	The ¼ sec. cor. of sec. 19, monumented with an iron post, 1 in. in diam., conforming to the record.

	N. 88° 53' W., beginning new measurement.
	Over mountainous land, through scattered timber and medium dense undergrowth; asc. 470 ft. over an E. slope.

Dependent Resurvey of a Portion of
the Subdivision of T. 3 S., R. 7 E.

CHAINS

- 20.16 Point for the W1/16 cor. of sec. 19, at proportionate dist.
Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 18 ins. in the ground and in a mound of stone, 3 ft. base, to top, with grass cap mkd.
$$W \frac{1}{16} S19$$
1965
Asc. 50 ft. over an E. slope.
- 30.00 Spur, projects N.; desc. 50 ft. over a NW. slope.
- 35.80 Draw, drains N. 10° W.; asc. 50 ft. over an E. slope.
- 40.74 The cor. of secs. 19 and 30, monumented with an iron post, 2 ins. in diam., conforming to the record.
Land, mountainous.
Soil, rocky, mountain loam.
Timber, scattered aspen and pine.
Undergrowth, dense sagebrush, medium dense choke cherry and oak.
N. $0^\circ 14'$ E., along the W. bdy. of sec. 19.
Over mountainous land, along an E. slope, through scattered timber and dense undergrowth.
- 4.40 No trace of the closing cor. of secs. 24 and 25, at record dist.
- 7.20 Slope changes to NE.; desc. 270 ft.
- 20.20 Point for the S1/16 cor. of sec. 19, at proportionate dist.
Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 16 ins. in the ground and in a mound of stone, 4 ft. base to top, with brass cap mkd.
$$S \frac{1}{16}$$
|S19
1965
Desc. 207 ft. over a NE. slope.
- 40.40 The cor. originally set for the $\frac{1}{4}$ sec. cor. of secs. 19 and 24, monumented with a quartz stone 14x8x6 ins., firmly set in the ground, and mkd. $\frac{1}{4}$ on the W. face. This cor. will now function as the $\frac{1}{4}$ sec. cor. of sec. 19 only.
At the cor. point
Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 22 ins. in the ground and in a collar of stone, with brass cap mkd.

Dependent Resurvey of a Portion of
the Subdivision of T. 3 S., R. 7 E.

CHAINS

T3S

R7E

|
1/2

|S19

1965

Bury the original cor. alongside the iron post.

N. 0° 07' E., beginning new measurement.

Over mountainous land, through scattered timber and dense undergrowth; desc. 350 ft. over a NE. slope.

17.30 Stream, 4 lks. wide, 2 ins. deep, flows, N. 60° E.; asc. 340 ft. over a SE. slope.

37.90 Spur, projects E.; desc. 20 ft. over a N. slope.

39.35 The cor. of secs. 13, 18, 19 and 24, monumented with a black sandstone, 16x10x8 ins., firmly set in the ground and mkd. with 3 notches on the S. and N. edges.

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. in diam., 16 ins. in the ground, to solid rock, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.

T3S

R6E R7E

S13 | S18

S24 | S19

1965

Bury the original cor. alongside the iron post.

Land, mountainous.

Soil, rocky, mountain loam.

Timber, widely scattered aspen and pine.

Undergrowth, dense sagebrush, choke cherry and oak.

From the cor. of secs. 17, 18, 19 and 20.

N. 89° 11' W., bet. secs. 18 and 19.

Over gently rolling canyon bottom land.

1.20 Irrigation ditch, drains N.

3.20 Creek, 4 lks. wide, 3 ins. deep, flows N. 30° E.

3.50 Fence, bears N. 25° W. and S. 25° E.

4.90 Creek, 5 lks. wide, 4 ins. deep, flows N.

7.00 Trail road, bears NW. and SE.

11.50 Fence, bears N. 30° E. and S. 30° W.

Dependent Resurvey of a Portion of
the Subdivision of T. 3 S., R. 7 E.

CHAINS

11.80	Road, bears N. 30° E. and S. 30° W.; asc. 50 ft. over an E. slope.
20.27	Point for the E1/16 cor. of secs. 18 and 19. Set an iron post, 30 ins. long, 2½ ins. in diam., 12 ins. in the ground, to solid rock and in a mound of stone, 3½ ft. base, to top, with brass cap mkd. $E \frac{1}{16} \frac{S18}{S19}$ Asc. 300 ft. over an E. slope.
38.00	Spur, projects N. 85° E.; asc. 20 ft. along a N. slope.
40.54	Point for the ¼ sec. cor. of secs. 18 and 19, at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. in diam., 12 ins. in the ground, to solid rock, and in a mound of stone, 3½ ft. base, to top, with brass cap mkd. $T3S R7E$ $\frac{1}{4} \frac{S18}{S19}$ 1965 Asc. 250 ft. along a N. slope.
81.08	The cor. of secs. 13, 18, 19 and 24. Land, mountainous and canyon bottom. Soil, rocky, mountain loam. Timber, widely scattered, aspen and pine. Undergrowth, dense sagebrush, service berry, choke cherry and oak.
Subdivision of Section 24, T. 3 S., R 7 E.	
2.10	From the ¼ sec. cor. of secs. 24 and 25.
18.50	N. 0° 04' E., on the N. and S. center line of sec. 24. Over mountainous land, through dense timber; desc. 120 ft. over a NW. slope. Gravel road bears NE. and SW. Leave timber.
19.50	Unimproved dirt road, bears irregularly E. and W.
19.80	Barbed and woven wire fence, bears E. and W.; enter cultivated land.
19.966	Point for the center S1/16 sec. cor. of sec. 24, at proportionate dist.

Subdivision of Section 24, T. 3 S., R. 7 E.

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 18 ins. below the surface of the ground, with brass cap mkd.

$$\begin{array}{c} C \\ S \frac{1}{16} | S24 \\ C \end{array}$$
 1965

from which

An aspen 6 ins. in diam., bears S. $27^{\circ} 15'$ E., 2.30 chs. dist., mkd. CS 1/16 S24 BT.

An aspen 6 ins. in diam., bears S. 09° W., 1.80 chs. dist., mkd. CS 1/16 S24 BT.

39.932 Intersect the E. and W. center line of sec. 24.

Point for the center $\frac{1}{2}$ sec. cor. of sec. 24.

Set an iron post, 18 ins. long, $2\frac{1}{2}$ ins. in diam., 18 ins. below the surface of the ground, with brass cap mkd.

$$\begin{array}{c} C \\ C \frac{1}{2} | S24 \\ C \end{array}$$
 1965

59.944 Point for the center N1/16 sec. cor. of sec. 24, at proportionate dist.

Set an iron post, 18 ins. long, $2\frac{1}{2}$ ins. in diam., 18 ins. below the surface of the ground, with brass cap mkd.

$$\begin{array}{c} C \\ N \frac{1}{16} | S24 \\ C \end{array}$$
 1965

60.30 Leave cultivated land, enter dense undergrowth.

60.50 Noblett Creek, 15 lks. wide, 6 ins. deep, flows W.

63.30 Barbed and woven wire fence, bears irregularly NW. and SE.

64.00 Improved dirt road, bears E. and W.; asc. 10 ft. over a SW. slope.

64.947 Point for the CSNN 1/256 cor. of sec. 24, at proportionate dist.

Set a 1 in. T-iron stake, 24 ins. long, 15 ins. in the ground and in a mound of stone, $2\frac{1}{2}$ ft. base, to top, with cadmium plated cap mkd.

$$\begin{array}{c} S24 \\ CSNN \\ \frac{1}{256} \\ 1965 \end{array}$$

Asc. 200 ft. over a SW. slope, through dense undergrowth.

Subdivision of Section 24, T. 3 S., R. 7 E.

CHAINS

69.950 Point for the CNN 1/64 cor. of sec. 24, at proportionate dist.

Set a 1 in. T-iron stake, 24 ins. long, 15 ins. in the ground and in a mound of stone, 2½ ft. base, to top, with cadmium plated cap mkd.

S24
CNN
 $\frac{1}{64}$
1965

Asc. 275 ft. over a SW. slope.

79.956 The ¼ sec. cor. of secs. 13 and 24.

Land, mountainous and nearly level farm and pasture. Soil, rocky, clay and mountain loam. Timber, dense aspen the first 18.50 chs. none the balance.

Undergrowth, dense willows along Noblett Creek, dense oak, service berry and choke cherry the last 15.00 chs.

From the ¼ sec. cor. of sec. 23 and 24.

N. 89° 45' E., on the E. and W. center line of sec. 24.

Over mountainous land, through dense timber; desc. 150 ft. over a NE. slope.

20.084 Point for the center W1/16 cor. of sec. 24, at proportionate dist.

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground and in a collar of stone, with brass cap mkd.

W $\frac{1}{16}$
G—C
S24
1965

from which

A pine, 5 ins. in diam., bears N. 33° E., 40 lks. dist., mkd. CW 1/16 S24 BT.

Desc. 225 ft. over a NE. slope.

25.105 Point for the CWEW 1/256 cor. of sec. 24, at proportionate dist.

Set a 1 in. T-iron stake, 24 ins. long, 15 ins. in the ground and in a mound of stone, 3 ft. base, to top, with brass cap mkd.

Subdivision of Section 24, T. 3 S., R. 7 E.

CHAINS

S24
CWEW
 $\frac{1}{256}$

1965

Desc. 88 ft. over a N. slope.

- 27.57 Barbed and woven wire fence, bears N. and S.
- 29.60 South Fork of the Provo River, 20 lks. wide, 1 ft. deep, flows N.; enter medium dense cottonwood.
- 32.87 Barbed wire fence, bears N. and S.; enter cultivated land.
- 40.169 Intersect the N. and S. center line of sec. 24. The center $\frac{1}{2}$ sec. cor. of sec. 24.
- 49.812 Point for the CWE 1/64 cor. of sec. 24, at proportionate dist.

Set a 1 in. T-iron stake, 24 ins. long, 18 ins. below the surface of the ground, with cadmium plated cap mkd.

S24
CWE
 $\frac{1}{64}$

1965

from which

An iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., set 24 ins. in the ground, for a reference monument, bears N. 65° E., 38 ft. dist., with brass cap mkd. CWE1/64RM38 FT. 1965 and an arrow pointing to the true point.

An iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., set 24 ins. in the ground, for a reference monument, bears S. 65° E., 38 ft. dist., with brass cap mkd. CWE1/6438FT.1965 and an arrow pointing to the true point.

- 50.26 Barbed wire fence, bears N. and S.
- 53.06 Barbed and woven wire fence, bears N. and S.
- 53.76 Improved dirt road, bears irregularly N. and S.; asc. 85 ft. over a W. slope.
- 59.795 Point for the center E1/16 cor. of sec. 24, at proportionate dist.
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 18 ins. in the ground, to solid rock, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.

Subdivision of Section 24, T. 3 S., R. 7 E.

CHAINS

E $\frac{1}{16}$

C ————— C

S24

1965

- 60.70 Enter timber; asc. 300 ft. over a W. slope.
- 79.761 The E $\frac{1}{2}$ sec. cor. of sec. 24.
- Land, mountainous and nearly level farm and pasture. Soil, rocky, clay and mountain loam. Timber, dense pine and aspen on the mountain slopes. Undergrowth, dense willows along the river, medium service berry, on the mountain slopes.
-
- From the E1/16 cor. of secs. 24 and 25.
- N. 0° 06' W., on the N. and S. center line of the SE. $\frac{1}{2}$ of sec. 24.
- Over mountainous land, through medium dense timber; desc. 30 ft. over a NW. slope.
- 5.00 Underground natural gas line, bears N. 59° 35' W. and S. 59° 35' E.; desc. 150 ft. over a NW. slope.
- 14.70 Small draw, drains W.; asc. 20 ft. over a S. slope.
- 19.00 Top of rise, slopes W.; desc. 5 ft. over a NW. slope.
- 20.01 Intersect the E. and W. center line of the SE. $\frac{1}{2}$ of sec. 24.
- Point for the SE. 1/16 cor. of sec. 24.
- Set an iron post, 30 ins. long, 2½ ins. in diam., 15 ins. in the ground, to solid rock, and in a mound of stone, 5 ft. base, to top, with brass cap mkd.
- SE $\frac{1}{16}$ S24
1965
- Desc. 95 ft. over a NW. slope.
- 40.02 The center E1/16 cor. of sec. 24.
-
- From the center S1/16 cor. of sec. 24.
- N. 89° 51' E., on the E. and W. center line of the SE. $\frac{1}{2}$ of sec. 24.
- Over cultivated land; asc. 55 ft. over a gentle W. slope.

Subdivision of Section 24, T. 3 S., R. 7 E.

CHAINS

- 9.00 Barbed and woven wire fence, bears irregularly N. and S.
- 9.40 Improved dirt road, bears irregularly N. and S.
- 9.701 Point for the CWSE. 1/64 cor. of sec. 24, at proportionate dist.
- Set a 1 in. T-iron stake, 24 ins. long 15 ins. in the ground, and in a mound of stone, 5 ft. base, to top, with cadmium plated cap mkd.
- S24
CWSE
 $\frac{1}{64}$
1965
- Asc. 40 ft. over a W. slope.
- 13.70 Enter scattered timber.
- 19.686 Intersect the N. and S. center line of the SE. $\frac{1}{2}$ of sec. 24, the SE. 1/16 cor. of sec. 24.
- Asc. 308 ft. over a W. slope; timber becomes medium dense.
- 39.656 The S1/16 cor. of sec. 24.

- From the center E1/16 cor. of sec. 24.
- N. 0° 05' W., on the N. and S. center line of the NE. $\frac{1}{2}$ of sec. 24.
- Over mountainous land, through dense undergrowth, along a NW. slope.
- .80 Slope changes to N., enter timber, desc. 50 ft.
- 4.10 Noblett Creek, 10 lks. wide, 8 ins. deep, flows W.
- 8.10 Branch of Noblett Creek, 10 lks. wide, 4 ins. deep, flows S. 60° W.; asc. 185 ft. over a SW. slope.
- 19.976 Intersect the E. and W. center line of the NE. $\frac{1}{2}$ of sec. 24.
- Point for the NE. 1/16 cor. of sec. 24.
- Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. in diam., 12 ins. in the ground, to solid rock and in a mound of stone, 3 ft. base, to top, with brass cap mkd.

NE $\frac{1}{16}$ S24
1965

from which

Subdivision of Section 24, T. 3 S., R. 7 E.

CHAINS

- A red cedar, 4 ins. in diam., bears S. 40° 30' E.,
12 lks. dist., mkd. NE 1/16 S24 BT.
- A red cedar, 5 ins. in diam., bears N. 45° 30' W.,
15 lks. dist., mkd. NE 1/16 S24 BT.
- Asc. 425 ft. over a S. slope.
- 39.95 2 The E1/16 cor. of secs. 13 and 24.
-
- From the center N1/16 cor. of sec. 24.
- N. 89° 51' E., on the E. and W. center line of the NE.
½ of sec. 24.
- Over canyon bottom land.
- .60 Noblett Creek, 15 lks. wide, 6 ins. deep, flows NW.
- 2.53 Barbed and woven wire fence, bears irregularly NW. and
SE.
- 3.20 Improved dirt road, bears NW. and SE.; asc. 35 ft. over
a SW. slope.
- 4.598 Point for the CWWNE 1/256 cor. of sec. 24, at pro-
portionate dist.
- Set a 1 in. T-iron stake, 24 ins. long, 15 ins. in the
ground and in a mound of stone, with cadmium plated cap
mkd.
- | |
|----------|
| S24 |
| CWWNE |
| <u>1</u> |
| 256 |
| 1965 |
- 16.30 Top of rise; desc. 10 ft. over a SE. slope.
- Asc. 210 ft. over a SW. slope, through scattered timber.
- 19.575 Intersect the N. and S. center line of the NE. ½ of sec.
24, the NE. 1/16 cor. of sec. 24.
- Desc. 85 ft. over a SE. slope.
- 38.40 Draw, drains S.; asc. 25 ft. over a NW. slope.
- 39.544 The N1/16 cor. of sec. 24.
-
- From the W1/16 cor. of secs. 24 and 25.
- N. 0° 06' W., on the N. and S. center line, of the SW. ½
of sec. 24.
- Over mountainous land, through dense timber; asc. 60 ft.
over an E. slope.
- 5.20 Spur, projects E.; desc. 255 ft. over a broken NE. slope

Subdivision of Section 24, T. 3 S., R. 7 E.

CHAINS	
19.98	<p>Intersect the E. and W. center line of the SW. $\frac{1}{4}$ of sec. 24.</p> <p>Point for the SW. 1/16 cor. of sec. 24.</p> <p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 22 ins. in the ground and in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">SW $\frac{1}{16}$ S24 1965</p> <p>Desc. 70 ft. over a NE. slope.</p>
28.70	Underground natural gas line, bears NW. and SE.; desc. 40 ft. over
39.96	The CW. 1/16 cor. of sec. 24.
20.036	<p>From the S1/16 cor. of secs. 23 and 24.</p> <p>N. $89^{\circ} 42'$ E., on the E. and W. center line of the SW. $\frac{1}{4}$ of sec. 24.</p> <p>over mountainous land, through dense timber; desc. 330 ft. over a NE. slope.</p> <p>Intersect the N. and S. center line of the SW. $\frac{1}{4}$ of sec. 24, the SW. 1/16 cor. of sec. 24.</p> <p>Desc. 345 ft. over a NE. slope.</p>
33.10	Underground natural gas line, bears SE. and NW.; leave timber; desc. 40 ft. over a NE. slope.
34.963	<p>Point selected for the witness CEESW 1/256 cor. of sec. 24.</p> <p>Set a 1 in. T-iron stake, 24 ins. long, 10 ins. in the ground and in a mound of stone, $2\frac{1}{2}$ ft. base, to top, with cadmium plated cap mkd.</p> <p style="text-align: center;">S24 CEESW $\frac{1}{256}$ WC</p>
35.063	True point for the CEESW 1/256 cor. of sec. 24, at proportionate dist., falls in the South Fork of the Provo River, river 20 lks. wide, 8 ins. deep, flows N.
38.70	Barbed wire fence, bears irregularly N. and S.; enter cultivated land.
40.072	The center S1/16 cor. of sec. 24.
5.015	<p>From the center W 1/16 cor. of sec. 24.</p> <p>N. $0^{\circ} 17'$ E., on the N. and S. center line of the NW. $\frac{1}{4}$ of sec. 24.</p> <p>Over mountainous land, through dense timber; desc. 100 ft. over a NE. slope.</p> <p>Point for the CSSNW 1/256 cor. of sec. 24, at proportionate dist.</p>

Subdivision of Section 24, T. 3 S., R. 7 E.

CHAINS

Set a 1 in. T-iron stake, 24 ins. long, 15 ins. in the ground and in a mound of stone, 3 ft. base, to top, with cadmium plated cap mkd.

S24
CSSNW
 $\frac{1}{256}$
1965

Desc. 165 ft. over a NE. slope.

10.03 Point for the CSNW $\frac{1}{64}$ cor. of sec. 24, at proportionate dist.

Set a 1 in. T-iron stake, 24 ins. long, 13 ins. in the ground and in a mound of stone, $3\frac{1}{2}$ ft. base, to top, with cadmium plated cap mkd.

S24
CSNW
 $\frac{1}{64}$
1965

10.20 Barbed and woven wire fence, bears irregularly NW. and SE.; desc. 60 ft. over a NE. slope. Timber becomes scattered.

20.06 Intersect the E. and W. center line of the NW. $\frac{1}{4}$ of sec. 24.

Point for the NW. $\frac{1}{16}$ cor. of sec. 24

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins. in the ground, with brass cap mkd.

NW $\frac{1}{16}$ S24
1965

from which

An aspen 5 ins. in diam., bears east, 13 lks. dist., dist., mkd. NW $\frac{1}{16}$ S24 BT.

An aspen, 10 ins. in diam., bears N. 45° W., 28 lks. dist., mkd. NW $\frac{1}{16}$ S24 BT.

Desc. 20 ft. over a NE. slope, enter willows, leave timber.

33.56 South Fork of the Provo River, 20 lks. wide, $1\frac{1}{2}$ ft. deep, flows NW.

35.105 Point for the CNNW $\frac{1}{256}$ cor. of sec. 24, at proportionate dist.

Set a 1 in. T-iron stake, 24 ins. long, 15 ins. in the ground and in a mound of stone, 3 ft. base, to top, with cadmium plated cap mkd.

Subdivision of Section 24, T. 3 S., R. 7 E.

CHAINS

S24
CNNNW
 $\frac{1}{256}$
1965

- 35.48 Barbed and woven wire fence, bears NW. and SE.
35.86 Noblett Creek, 15 lks. wide, 1 ft. deep, flows W.
37.36 Improved dirt road, bears NW. and SE.; leave willows;
asc. 100 ft. over a SW. slope, through dense undergrowth.
40.12 The W1/16 cor. of secs. 13 and 24.

From the N1/16 cor. of secs. 23 and 24.

N. 89° 52' E., on the E. and W. center line of the NW.
 $\frac{1}{2}$ of sec. 24.

Over mountainous land, through medium dense timber; desc.
170 ft. over a NE. slope.

- 10.013 Point for the CWNW 1/64 cor. of sec. 24, at proportionate
dist.

Set a 1 in. T-iron stake, 24 ins. long, 14 ins. in the
ground and in a mound of stone, 3 ft. base, to top, with
cadmium plated cap mkd.

S24
CWNW
 $\frac{1}{64}$
1965

- 10.04 Barbed and woven wire fence, bears irregularly NW. and
SE.; desc. 35 ft. over a NW. slope.
20.027 Intersect the N. and S. center line of the NW. $\frac{1}{2}$ of sec.
24. The NW. 1/16 cor. of sec. 24.
Desc. 20 ft. over a NE. slope.
22.60 Enter river bottom land, and dense willows.
23.50 South Fork of the Provo River, flows irregularly N.
31.60 Barbed wire fence, bears irregularly N. and S.
37.00 Leave willows, enter cultivated and pasture land.
40.054 The center N1/16 cor. of sec. 24.

Subdivision of Section 22, T. 3 S., R. 7 E.

From the $\frac{1}{2}$ sec. cor. of secs. 22 and 23, previously
described.

Subdivision of Section 22, T. 3 S., R. 7

CHAINS

- N. 89° 28' W. on the E. and W. center line of Sec. 22, which is also a forest bdy. line.
- Over mountainous land, through medium dense timber; asc. 170 ft. over a NE. slope.
- 11.60 Small spur, slopes W.; desc. 235 ft. along spur.
- 31.70 Trail in bottom of swale, trail bears irregularly N. and S.; asc. 25 ft. over an E. slope.
- 34.40 Top of small rise; desc. 190 ft. over a W. slope.
- 60.28 Little South Fork of the Provo River, 13 lks. wide, 1 ft. deep, flows NW.; dense willows along creek; asc. 145 ft. over an E. slope.
- 64.47 Corner of old fence, fences bear N. 45° E. and W.; asc. 150 ft. over a NE. slope.
- 74.07 Fence, bears N. and S.
- 80.33 The $\frac{1}{4}$ sec. cor. of secs. 21 and 22, previously described.
- Land, mountainous.
Soil, rocky mountain loam.
Timber, medium dense aspen, fir and pine.
Undergrowth, willows, oak, service berry and choke cherry.

Subdivision of Section 21, T. 3 S., R. 7 E.

- From the $\frac{1}{4}$ sec. cor. of sec. 21, on the S. bdy. of the sec.
- N. 0° 02' E., on the N. and S. center line of sec. 21.
- Over mountainous land, through dense aspen timber; asc. 95 ft. over a SE. slope.
- 5.50 Leave timber, slope changes to S.; asc. 70 ft.
- 12.00 Enter aspen timber; asc. 20 ft. over a S. slope.
- 14.00 Ridge, bears N. 60° E., and S. 60° W.; desc. 120 ft. over a NW. slope.
- 30.00 Enter dense pine timber; desc. 285 ft. over a NW. slope.
- 41.23 Intersect the E. and W. center line of sec. 21.
- Point for the center $\frac{1}{4}$ sec. cor. of sec. 21.
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 12 ins. in the ground, to solid rock and in a mound of stone, 3 ft. base, to top, with brass cap mkd.

Subdivision of Section 21, T. 3 S., R. 7 E.

CHAINS

C $\frac{1}{2}$ S21
1965

Desc. 185 ft. over a NW. slope.

- 49.20 Draw, drains N. 45° E.; thence along an E. slope.
50.60 Center of rock slide, 2.00 chs. wide, slopes E.; desc. 220 ft. along an E. changing to NE. slope.

- 61.18 Point for the center N. 1/16 cor. of sec. 21, at proportionate dist.

Set an iron post, 30 ins. long, 2½ ins. in diam., 6 ins. in the ground, to solid rock and in a mound of stone, 4 ft. base, to top, with brass cap mkd.

C
N $\frac{1}{16}$ | S21
C
1965

Desc. 215 ft. over a NE. slope.

- 66.00 Left bank of the Provo River, 2 ft. deep, flows irregularly W.
66.90 Right bank of the Provo River.
67.20 Road along right bank of river, leading to summer homes; thence across river bottom land.
70.40 Left bank of fork of the Provo River, 6 ins. deep, flows W.
71.80 Right bank of fork of the Provo River; asc. 40 ft. over a S. slope.
81.13 The ¼ sec. cor. of secs. 16 and 21.

Land, mountainous.
Soil, rocky mountain loam.
Timber, areas of dense pine, aspen and fir.
Undergrowth, medium dense oak, service berry and choke cherry.

From the ¼ sec. cor. of secs. 21 and 22.

N. 89° 56' W., on the E. and W. center line, of sec. 21.
Over mountainous land, through medium dense timber; asc. 10 ft. over a NE. slope.

- 2.30 Enter rock slide, slopes NE.; asc. 30 ft. over a NE. slope.
5.80 Leave rock slide; asc. 300 ft. over a broken NE. slope, enter timber.
20.16 Point for the center E1/16 cor. of sec. 21, at proportionate dist.

Subdivision of Section 21, T. 3 S., R. 7 E.

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 12 ins. in the ground, to solid rock and in a mound of stone, $3\frac{1}{2}$ ft. base, to top, with brass cap mkd.

$$E \frac{1}{16}$$

$$C \text{-----} C$$

$$S21$$

1965

Asc. 140 ft. over a NE. slope.

- 24.50 Spur, projects N.; desc. 255 ft. over a NW. slope.
- 40.32 Intersect the N. and S. center line of sec. 21. The center $\frac{1}{4}$ sec. cor. of sec. 21.
- Desc. 60 ft. over a NW. slope.
- 44.90 Ravine, drains N. 45° E.; asc. 290 ft. over an E. slope.
- 54.00 Old fence, bears N. and S.; asc. 40 ft. over an E. slope.
- 55.90 Spur, projects N. 30° E.; desc. 90 ft. over a NW. slope.
- 60.37 Point for the center W1/16 cor. of sec. 21, at proportionate dist.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins. in the ground, with brass cap mkd.

$$W \frac{1}{16}$$

$$C \text{-----} C$$

S21

1965

Desc. 55 ft. over a NW. slope.

- 63.10 Old skid trail, bears N. 45° W., and S. 45° E.; desc. 110 ft. over a NW. slope.
- 75.40 Slope changes to N.; desc. 20 ft.
- 80.42 The $\frac{1}{4}$ sec. cor. of secs. 20 and 21.
- Land, mountainous.
Soil, rocky, mountain loam.
Timber, dense aspen, pine and fir.
Undergrowth, patches of dense service berry and choke cherry.

From the center-E1/16 cor. of sec. 21.

N. $0^\circ 01'$ W., on the N. and S. center line of the NE. $\frac{1}{4}$ of sec. 21.

Over mountainous land, through dense fir timber and choke cherry undergrowth; desc. 635 ft. over a broken N. slope.

Subdivision of Section 21, T. 3 S., R. 7 E.

CHAINS	
20.00	Intersect the E. and W. center line of the NE. $\frac{1}{4}$ of sec. 21.
	Point for the NE. 1/16 cor. of sec. 21.
	Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 8 ins. in the ground, to solid rock and in a mound of stone, $3\frac{1}{2}$ ft. base, to top, with brass cap mkd.
	NE $\frac{1}{16}$ S21
	1965
	Thence by triangulation; desc. 165 ft. over a broken timber covered N. slope.
33.70	Left bank of the Provo River, 8 ins. deep, flows irregularly W.
35.10	Right bank of the river.
40.00	The E. 1/16 cor. of secs. 16 and 21.
	From the point for the N. 1/16 cor. of secs. 21 and 22.
	S. $89^{\circ} 58'$ W., on the E. and W. center line of the NE. $\frac{1}{4}$ of sec. 21.
	Over mountainous land, through medium dense timber; asc. 35 ft. along a N. slope.
15.70	Leave timber, enter rock slide; asc. 45 ft. over a NE. slope.
20.15	Intersect the N. and S. center line of the NE. $\frac{1}{4}$ of sec. 21. The NE. 1/16 cor. of sec. 21.
20.30	Leave rock slide; asc. 85 ft. over a timber covered NE. slope.
28.80	Spur, projects N.; desc. 30 ft. over a NW. slope.
35.30	Draw, drains N.; asc. 90 ft. over a NE. slope.
40.30	The center N. 1/16 cor. of sec. 21.
	From the center W. 1/16 cor. of sec. 21.
	N. $0^{\circ} 06'$ W., on the N. and S. center line of the NW. $\frac{1}{4}$ of sec. 21.
	Over mountainous land, through dense timber; desc. 75 ft. over a NW. slope.
8.00	Trail, bears NW. and SE.; desc. 180 ft. over a NW. slope.
19.30	Slope changes to N.
19.89	Intersect the E. and W. center line, of the NW. $\frac{1}{4}$ of sec. 21.

Subdivision of Section 21, T. 3 S., R. 7 E.

CHAINS

Point for the NW. 1/16 cor. of sec. 21.

Set an iron post, 30 ins. long, 2½ ins. in diam., 15 ins. in the ground, to solid rock and in a mound of stone, 3 ft. base, to top, with brass cap mkd.

NW $\frac{1}{16}$ S21

1965

Thence by triangulation; desc. 800 ft. over a broken N. slope.

- 37.00 Left bank of the Provo River, 1½ ft. deep, flows SW.
 38.00 Right bank of river, then across river bottom land.
 39.78 The W. 1/16 cor. of secs. 16 and 21.

From the center N. 1/16 cor. of sec. 21.

S. 89° 53' W., on the E. and W. center line, of the NW. ¼ of sec. 21.

Over mountainous land, through dense timber; asc. 250 ft. over a broken NE. slope.

- 20.12 Intersect the N. and S. center line, of the NW. ¼ of sec. 21. The NW. 1/16 cor. of sec. 21.
 21.20 Spur, projects NW.; desc. 220 ft. along a N. slope.
 40.24 The N. 1/16 cor. of secs. 20 and 21.

Subdivision of Section 20, T. 3 S., R. 7 E.

From the ¼ sec. cor. of sec. 20, on the S. bdy. of the sec.

N. 0° 24' W., on the N. and S. center line of sec. 20.

Over mountainous land, through scattered timber and dense undergrowth; desc. 260 ft. over a N. slope.

- 13.00 Slope changes to NE.; desc. 105 ft.
 19.50 Jeep road, bears S. 45° E. and N. 45° W., desc. 25 ft. over a NE. slope.
 23.00 Slope changes to N.; desc. 140 ft.
 36.00 Draw, drains N. 30° W.; asc. 15 ft. over a SW. slope.
 40.11 Intersect the E. and W. center line of sec. 20.
 Point for the center ¼ cor. of sec. 20.

Subdivision of Section 20, T. 3 S., R. 7 E.

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 20 ins. in the ground and in a collar of stone, with brass cap mkd.

$$C \frac{1}{4} S20$$

1965

Asc. 25 ft. over a N. slope.

48.70 Spur, projects NW., desc. 90 ft. over a N. slope.

59.10 Draw, drains NW.; asc. 40 ft. over a S. slope.

71.30 Spur, projects NW.; desc. 100 ft. over a N. slope.

80.21 The $\frac{1}{4}$ sec. cor. of secs. 17 and 20.

Land, mountainous.

Soil, rocky, mountain loam.

Timber, scattered to patches of dense aspen and pine.

Undergrowth, medium dense oak, service berry and choke cherry.

From the $\frac{1}{4}$ sec. cor. of secs. 20 and 21.

S. $89^{\circ} 55'$ W., on the E. and W. center line of sec. 20.

Over mountainous land, through dense timber; desc. 45 ft. along a broken N. slope.

7.00 Small draw, drains N.; asc. 65 ft. along a N. slope, timber becomes scattered; enter dense undergrowth.

14.30 Spur, projects NW.; desc. 220 ft. over a W. slope.

40.60 Intersect the N. and S. center line of sec. 20. The center $\frac{1}{4}$ sec. cor. of sec. 20.

Desc. 30 ft. over a W. slope.

42.30 Draw, drains N. 30° W.; asc. 35 ft. over a NE. slope.

47.40 Spur, projects NW.; desc. 54 ft. over a W. slope.

60.77 Point for the center W. $\frac{1}{16}$ cor. of sec. 20, at proportionate dist.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 18 ins. in the ground, to solid rock and in a mound of stone, 3 ft. base, to top, with brass cap mkd.

$$W \frac{1}{16}$$

$$C \text{ ————— } C$$

S20

1965

62.46 Fence, bears S. 06° W. and N. 40° W.; desc. 185 ft. over a NW. slope.

80.94 The $\frac{1}{4}$ sec. cor. of secs. 19 and 20.

Subdivision of Section 20, T. 3 S., R. 7 E.

CHAINS

Land, mountainous.
 Soil, rocky, clay loam.
 Timber, scattered, with patches of dense pine, fir and aspen.
 Undergrowth, dense oak, medium dense choke cherry and service berry.

- From the center W. 1/16 cor. of sec. 20.
- N. 0° 19' W. on the N. and S. center line, of the NW. ¼ of sec. 20.
- Over mountainous land, through medium dense undergrowth; desc. 45 ft. over a NW. slope.
- 4.98 Irrigation ditch, drains NW.
- 5.87 Fence, bears N. 5° E. and S. 5° W.; desc. 115 ft. over a NW. slope.
- 13.80 Enter aspen timber; desc. 20 ft. over a NW. slope.
- 16.00 Wash, drains NW.; asc. 25 ft. over a SW. slope.
- 16.30 Slope changes to N.
- 17.42 Trail road, bears irregularly E. and W.; desc. 25 ft. over a N. slope.
- 18.50 Small draw, drains NW.; asc. 15 ft. over a S. slope.
- 19.50 Leave timber; enter dense undergrowth.
- 19.93 Fence, bears S. 20° E. and N. 20° W.; asc. 90 ft. over a S. slope.
- 35.90 Spur, projects NW.; desc. 50 ft. over a N. slope.
- 39.67 Fence, bears N. 8° E. and S. 8° W.
- 40.06 The W. 1/16 cor. of secs. 17 and 20.

Subdivision of Section 19, T. 3 S., R. 7 E.

- From the ¼ sec. cor. of sec. 19, on the S. bdy. of the sec.
- North, on the N. and S. center line of sec. 19.
- Over mountainous land, through dense timber, thence by triangulation along a broken E. slope.
- 20.15 Point for the center S. 1/16 cor. of sec. 19, at proportionate dist.

Subdivision of Section 19, T. 3 S., R. 7 E.

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins. in the ground, with brass cap mkd.

$$\begin{array}{c} C \\ S \frac{1}{16} \left| S19 \right. \\ C \end{array}$$

Desc. 295 ft. over a broken timber covered NE. slope.

40.30 Intersect the E. and W. center line of sec. 19.

Point for the center $\frac{1}{4}$ cor. of sec. 19.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 4 ins. in the ground, to solid rock and in a mound of stone, 4 ft. base, to top, with brass cap mkd.

$$\begin{array}{c} C \\ \frac{1}{4} S19 \\ 1965 \end{array}$$

Desc. 250 ft. over a broken NE. slope; timber becomes scattered, undergrowth dense.

60.00 Creek, 5 lks. wide, 4 ins. deep, flows irregularly E.; asc. 230 ft. over a S. slope through dense undergrowth.

79.20 Spur, projects N. 85° E.; desc. 35 ft. over a N. slope. End of triangulations.

80.00 The $\frac{1}{4}$ sec. cor. of secs, 18 and 19.

Land, mountainous.

Soil, rocky, mountain loam.

Timber, dense to scattered aspen, pine and fir.

Undergrowth, dense oak, service berry and choke cherry, scattered patches of sagebrush.

From the $\frac{1}{4}$ sec. cor. of secs. 19 and 20.

N. $88^\circ 45'$ W., on the E. and W. center line of sec. 19.

Over mountainous land, through dense undergrowth, by triangulation; desc. 50 ft. over a W. slope.

9.00 Creek, 3 lks. wide, 6 ins. deep, flows N.; asc. 20 ft. over a E. slope.

11.50 Dirt road, bears irregularly N. and S.; asc. 25 ft. over an E. slope.

20.34 Point for the center E. $1/16$ cor. of sec. 19, at proportionate dist.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 3 ins. in the ground, to solid rock and in a mound of stone, 5 ft. base, to top, with brass cap mkd.

Subdivision of Section 19, T. 3 S., R. 7 E.

CHAINS

$E \frac{1}{16}$
 C ————— C
 S19
 1965

25.00 Enter widely scattered timber, dense undergrowth; asc. 240 ft. over a NE. slope.

40.68 Intersect the N. and S. center line of sec. 19. The center $\frac{1}{2}$ sec. cor. of sec. 19.

Asc. 320 ft. over a broken NE. slope.

60.88 Point for the center W. $\frac{1}{16}$ cor. of sec. 19, at proportionate dist.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 22 ins in the ground, and in a collar of stone, with brass cap mkd.

$W \frac{1}{16}$
 C ————— C
 S19
 1965

The above cor. is set on a gentle NE. slope, in a grove of scrub aspen.

Asc. 50 ft. over a NE. slope.

62.90 Spur, projects N.; desc. 50 ft. along a broken N. changing to NW. slope.

81.29 The $\frac{1}{2}$ sec. cor. of sec. 19, on the W. bdy. of the sec.

Land, mountainous.

Soil, rocky, mountain loam.

Timber, scattered to medium dense pine, aspen and fir. Undergrowth, dense oak, service berry and choke cherry.

From the center E. $\frac{1}{16}$ cor. of sec. 19.

N. $0^{\circ} 06' W.$, on the N. and S. center line of the NE. $\frac{1}{2}$ of sec. 19.

Over rolling mountain canyon bottom land, through dense undergrowth; desc. 90 ft. over a NE. slope.

19.00 Creek, 5 lks. wide, 4 ins. deep, flows E.

20.00 Road, bears N.; then along the E. side of road and the W. side of a fence.

33.00 Road and fence turn to the NE.; asc. 50 ft. over a SE. slope.

39.86 The E. $\frac{1}{16}$ cor. of secs. 18 and 19.

Subdivision of Section 19, T. 3 S., R. 7 E.

CHAINS

From the W. 1/16 cor. of sec. 19, on the S. bdy. of the sec.

N. 0° 02' E., on the N. and S. center line of the SW ¼ of sec. 19.

Over mountainous land, through dense timber; desc. 30 ft. over a NE. slope.

3.60 Slope changes to N.; desc. 205 ft.

20.17 Intersect the E. and W. center line of the SW ¼ of sec. 19.

Point for the SW. 1/16 cor. of sec. 19.

Set an iron post, 30 ins. long, 2½ ins. in diam., 20 ins. in the ground and in a collar of stone, with brass cap mkd.

SW $\frac{1}{16}$ S19

1965

Desc. 90 ft. over a NE. slope, through scattered timber and dense undergrowth.

30.255 Point for the CNSW 1/64 cor. of sec. 19.

Set a 1 in. T-iron stake, 24 ins. long, 10 ins. in the ground, and in a mound of stone, 2½ ft. base, with cadmium plated cap mkd.

S19

CNSW

$\frac{1}{64}$

1965

Desc. 160 ft. over a NE. slope, through scattered timber and medium dense undergrowth.

40.34 The center W. 1/16 cor. of sec. 19.

From the center S. 1/16 cor. of sec. 19.

N. 88° 49' W., on the E. and W. center line of the SW ¼ of sec. 19.

Over mountainous land, through scattered timber and dense undergrowth; asc. 25 ft. over a E. slope.

2.40 Spur, projects N. 30° E.; desc. 20 ft. over a W. slope.

6.20 Draw, drains NE.; asc. 210 ft. over a NE. slope.

20.18 Intersect the N. and S. center line of the SW ¼ of sec. 19. The SW. 1/16 cor. of sec. 19.

Asc. 60 ft. over a NE. slope.

Subdivision of Section 19, T. 3 S., R. 7 E.

CHAINS

23.40 Spur, projects N. desc. 20 ft. over a NW. slope.

25.223 Point for the CEWSW 1/256 cor. of sec. 19.

Set a 1 in. T-iron stake 12 ins. in the ground and in a mound of stone, with cadmium plated cap mkd.

S19
CEWSW
1
256
1965

Desc. 80 ft. over a NW. slope.

40.67 The S. 1/16 cor. of sec. 19, on the W. bdy. of the sec.

General Description

A considerable variety of land and soil is found in Township 3 South, Range 7 East, covered by this survey. The general elevation ranges from about 9,000 ft. above sea level; on the top of the mountains to about 7,000 ft. above sea level along the Provo River. The soil in the canyon bottom land is an alluvial silt and loam and part of it is being farmed and pastured. The mountain land, is a rocky mountain loam. The timber consists of areas of dense aspen fir and pine. The undergrowth is mostly oak service berry and choke cherry, with lesser amounts of sagebrush. Some of the private property in the canyon bottoms, mostly along the Provo River has been subdivided and summer homes are being built. The area is accessible from an oil changing to an improved dirt and gravel road, which bears SE. from Francis, Utah.

CERTIFICATE OF SURVEY

I, Fred R. Chappell, HEREBY CERTIFY upon honor that,
 in pursuance of special instructions bearing date of the 4th day of June, 19 65,
 I have dependently resurveyed the boundaries of secs. 19, 20, 21, 22 and 24
 and surveyed a portion of the subdivisional lines in those sections, in
 Township 3 South, Range 7 East

of the Salt Lake Meridian, in the State of Utah, which
 are represented in the foregoing field notes as having been executed by me and under my direction;
 and that said survey has been made in strict conformity with said special instructions, the Manual
 of Instructions for the Survey of the Public Lands of the United States, and in specific manner
 described in the foregoing field notes.

April 19, 1966
 (Date)

Fred R. Chappell
 (Cadastral Surveyor)
 SUPERVISORY

 (Date)

 (Cadastral Surveyor)

CERTIFICATE OF APPROVAL

SUBMITTED FOR APPROVAL
 Date NOV 27 1967

BUREAU OF LAND MANAGEMENT,
 Washington, D. C.

The foregoing field notes of the boundaries of secs. 19, 20, 21, 22 and 24 and a
 portion of the subdivisional lines in those sections in Township 3 South,
 Range 7 East, Salt Lake Meridian, Utah

executed by Fred R. Chappell, Supervisory Cadastral Surveyor
 having been critically examined and found correct, are hereby approved.

MAR 17 1968
 (Date)

R. E. Brown
 (Chief, Division of Engineering)

CERTIFICATE OF TRANSCRIPT

~~I CERTIFY That the foregoing transcript of the field notes of the above described surveys in~~
~~_____~~, is a true copy of the original field notes.

~~_____~~
 (Date)

~~_____~~
 (Chief, Division of Engineering)

Blank

Page

ALL INFORMATION CONTAINED
HEREIN IS UNCLASSIFIED

DATE 11 FEB 2 39 8

Blank

Page

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

ORIGINAL

RECEIVED
BUREAU OF LAND MANAGEMENT

FIELD NOTES

OF THE

280 APR 11 AM 2 30 9

DEPENDENT RESURVEY OF A PORTION OF THE EAST BOUNDARY

THE NORTH BOUNDARY

AND PORTION OF THE SUBDIVISION

OF

TOWNSHIP 37 SOUTH, RANGE 7 WEST

Of the SALT LAKE Meridian,

in the State of UTAH

EXECUTED BY

CRAIG P. SYLVESTER

SUPERVISORY CADASTRAL SURVEYOR

Under special instructions dated FEBRUARY 25, 19 64, which provided for the surveys

included under Group Number 471, approved FEBRUARY 26, 1964,

and assignment instructions dated JULY 2, 19 64.

Survey commenced AUGUST 5, 19 64

Survey completed NOVEMBER 6, 19 64

INDEX DIAGRAM

Township 37 SOUTH Range 7 WEST

14	12	11	9	8	7	
6	58 5	47 4	37 8	29 2	21 1	6
57	55	46	35	28	20	
7	54 4	44 9	34 10	26 11	19 12	4
53	52	43	33	26	18	
18	51 17	42 16	32 15	24 14	16 13	2
50	48	41	31	23	15	
19	20	21	22	23	24	
30	29	28	27	26	25	
31	32	33	34	35	36	

Dependent Resurvey, T. 37 S., R. 7 W.

CHAINS

The north boundary was surveyed by Shadrach M. Richardson, Deputy Surveyor, in 1884; the east 1 mile was retraced by R. E. L. Collier, Deputy Surveyor, in 1895; and the west 2 miles were retraced by Alfred B. Lewis, Deputy Surveyor, in 1897. The south boundary was surveyed by Andrew J. Stewart Jr., Deputy Surveyor, in 1883; the east 5 miles were retraced by R. E. L. Collier, in 1895; and the west 2 miles were retraced by Alfred B. Lewis, in 1897. The east boundary was surveyed by Andrew J. Stewart Jr., in 1883; and retraced by R. E. L. Collier, in 1895. The west boundary was surveyed by Andrew J. Stewart Jr., in 1883; retraced by Alfred B. Lewis, in 1897; and retraced by Elliot Bird and Andrew Nelson, in 1941. A portion of the subdivisional lines were surveyed by R. E. L. Collier in 1895 and a portion by Alfred B. Lewis in 1897.

The following field notes are those of a dependent resurvey of the north three miles of the east boundary, the north boundary, and the subdivisional lines of the north one half of T. 37 S., R. 7 W.

Before restoring lost corners the lines of the original survey were retraced and a diligent search made for any evidence of the original corners. The rules of proportionate measurement were applied to ascertain the position of the lost corner after every reasonable possibility of finding direct evidence of the corner had been exhausted.

The survey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1947, and the Special Instructions dated February 25, 1964.

Corners on the east-west lines were set on the true latitudinal curve. Lines connecting previously established corners were run by random and true method, but for simplification of the record, the random lines are omitted from these field notes.

All lines of this survey were run by direct method where lines were accessible; lines inaccessible were run by traverse or triangulation method. Distances to topography on lines run by traverse and triangulation methods are approximately as scaled from U.S.G.S. topographic sheets. The details of such traverses and triangulations have been thoroughly checked and verified, and in order to simplify the records, the diagrams and reductions are omitted from these field notes.

The direction of the lines of this survey were determined by reference to true meridians established on line by hour angle observations on Polaris. They were carried forward by sustained angulation, being supplemented by numerous other observations on the sun taken throughout the progress of the survey.

Dependent Resurvey, T. 37 S., R. 7 W.

CHAINS

The geographic position for the southeast corner of section 13 is in Latitude $37^{\circ} 35' 12.5''$ N. and Longitude $112^{\circ} 34' 33.5''$ W., as determined by traverse from United States Geological Survey triangulation station "Henrie" located in sec. 17, S. $31^{\circ} 58' E.$, 1736 chs. from the $\frac{1}{4}$ cor. of secs. 17 and 18, in Latitude $37^{\circ} 35' 28.14''$ N., Longitude $112^{\circ} 39' 54.81''$ W.

The magnetic declination was read at a number of stations throughout the township and the average of the several readings was found to be $15^{\circ} 15' E.$

Dependent Resurvey, West Boundary, T. 37 S., R. 6 W.

Reestablishment of the Resurvey Executed by R. E. L. Collier, Deputy Surveyor, in 1895

Beginning at the cor. of secs. 18 and 19, T. 37 S., R. 6 W., determined by a sandstone $6 \times 12 \times 16$ ins., plainly mkd. 3 notches on S. face.

from which

A pine, 14 ins. diam., bears N. $45^{\circ} W.$, 43 lks. dist.; mks. have been obliterated.

A pine, 16 ins. diam., bears N. $57^{\circ} E.$, 43 lks. dist., mkd. T37S R6W S18 BT.

A pine, 14 ins. diam., bears S. $85^{\circ} E.$, 129 lks. dist.; mks. not legible.

At the corner point

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins. in the ground, in a mound of stone 5 ft. base, to top, with brass cap mkd.

	T37S	
R7W		R6W
S24		S18
		S19

1964

from which

A pine, 10 ins. diam., bears S. $3^{\circ} E.$, 57 lks. dist., mkd. T37S R6W S19 BT.

N. $0^{\circ} 08' E.$, along the W. bdy. of sec. 18.

Over broken mountain land, covered with timber; asc. 90 ft. over steep and eroded S. slope.

Dependent Resurvey, West Boundary, T. 37 S., R. 6 W.

CHAINS

3.09 Point for the cor. of secs. 13 and 24, at proportionate distance; there is no remaining evidence of original corner, and remaining bearing trees do not fit calls of original notes.

Set an iron post 30 ins. long, 2½ ins. diam., 16 ins. in the ground, in a collar of stone, with brass cap mkd.

T37S	
R7W	R6W
S13	S18
S24	
1964	

from which

A pine, 12 ins. diam., bears S. 2° W., 97 lks. dist., mkd. for sec. 13; marks on this tree effaced.

A cedar 12 ins. diam., bears S. 80½ W., 41 lks. dist., mkd. T37S R7W S13 BT. The mark S13 was changed to S24.

A cedar 10 ins. diam., bears N. 40½ W., 22 lks. dist., mkd. T37S R7W S13 BT.

Cor. falls at crest of steep eroded area; asc. 450 ft. over broken S. slope, through heavy timber.

20.30 E. end high ridge, bears W. and slopes sharply E.; desc. 420 ft. over steep N. slope.

39.79 Point for the ¼ sec. cor. of sec. 18, T. 37 S., R. 6 W., at proportionate distance; there is no remaining evidence of original corner.

Set an iron post 30 ins. long, 2½ in. diam., 24 ins. in the ground, in a collar of stone, with brass cap mkd.

T37S	
R7W	R6W
	¼
	S18
1964	

from which

A pine, 10 ins. diam., bears East, 29 lks. dist., mkd. ¼ S18 BT.

Desc. 85 ft. over steep N. slope.

42.73 Point for the ¼ sec. cor. of sec. 13, T. 37 S., R. 7 W., at midpoint; there is no remaining evidence of original corner.

Dependent Resurvey, West Boundary, T. 37 S. R. 6 W.

CHAINS

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, in a collar of stone, with brass cap mkd.

T37S	
R7W	R6W
$\frac{1}{2}$	
S13	
1964	

from which

A pine, 6 ins. diam., bears West, 43 lks. dist., mkd. $\frac{1}{2}$ S13 BT.

Desc. 200 ft. over N. slope, through dense timber.

- 64.50 Road, improved gravel, bears N. 75° E. and S. 75° W.; desc. 45 ft. over gentle N. slope, leave timber.
- 75.80 Wash, 3 ft. deep, 20 lks. wide, drains E., small seep of water; asc. S. slope.
- 76.40 Base of steep ascent, bears E. and W.; asc. 90 ft. over steep S. slope, over broken lava boulders, enter scattered timber.
- 79.28 The cor. of secs. 7 and 18, T. 37 S., R. 6 W., marked by a lava stone, plainly mkd. 2 notches on N. and 4 notches on S. face.

At the corner point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in lava slide rock, with brass cap mkd.

T37S	
R7W	R6W
$\frac{1}{2}$	
S13	S7
S18	
1964	

Place original stone E. of corner.

Set red cedar post, 5 ins. diam., 5 ft. long beside corner.

Land, mountainous.

Soil, rocky gravel.

Timber, pine and scattered juniper.

N. $0^\circ 41'$ W., along the W. bdy. of sec. 7.

Over broken mountain land; asc. 100 ft. over steep S. slope, over lava boulders.

- 3.09 The cor. of secs. 12 and 13, T. 37 S., R. 7 W., marked by a lava stone, plainly mkd. 2 notches on N. and 4 notches on S. face.

from which

A red cedar, 14 ins. diam., bears S. 82° W., 92 lks. dist., properly mkd.

Dependent Resurvey, West Boundary, T. 37 S., R. 6 W.

CHAINS

At the corner point

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in lava rock slide, with brass cap mkd.

T37S	
R7W	R6W
<u>S12</u>	S7
S13	

1964

Place original stone W. of corner.

Set red cedar post, 5 ins. diam., 5 ft. long beside corner.

Asc. 180 ft. over steep S. slope, over lava boulders.

- 7.90 S. crest of point, bears E. and W.; thence over top of point.
- 12.00 N. crest same point, bears E. and W. irregular; desc. 310 ft. over steep and rocky N. slope.
- 21.00 Base steep descent, bears E. and W. irregular; thence over level bottom land, leave timber.
- 39.94 The $\frac{1}{4}$ sec. cor. of sec. 7, T. 37 S., R. 6 W., marked by a lava stone, 10x12x16 ins., plainly mkd. $\frac{1}{4}$.
- At the corner point
- Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, in a collar of stone with brass cap mkd.
- | | |
|------|---------------|
| T37S | |
| R7W | R6W |
| | $\frac{1}{4}$ |
| | S7 |
- 1964
- Place original stone E. of corner.
-
- N. $0^{\circ} 01'$ W., beginning new measurement.
- Desc. 45 ft. over brushy land.
- 2.88 The $\frac{1}{4}$ sec. cor. of sec. 12, T. 37 S., R. 7 W., marked by a limestone 12x12x16 ins., plainly mkd. $\frac{1}{4}$.
- At the corner point
- Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, in a collar of stone, with brass cap mkd.
- | | |
|------|---------------|
| T37S | |
| R7W | R6W |
| | $\frac{1}{4}$ |
| S12 | |
- 1964
- Place original stone W. of corner.
- 6.70 Dirt road, bears S. 80° W. and NE. about 5 chs. to junction.

Dependent Resurvey, West Boundary, T. 37 S., R. 6 W.

CHAINS

- 10.20 Dirt road, bears NW. and E.
- 10.90 Low rocky finger, bears E. and W.; desc. brushy N. slope.
- 19.83 Old fence cor., bears N. and E.
- 22.55 Old fence corner, bears W. and S.
- 31.70 Leave brush land; thence over grassy pasture.
- 40.68 The cor. of secs. 6 and 7, in line with old property line fences to the N. and E. These fences were shown me by present property owner and identified as being on the original section lines.

At the corner point

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T37S	
R7W	R6W
S12	S6
	S7
1964	

Land, mountainous S. portion, rolling N. portion.
Soil, rocky S. portion, clay gravel N. portion.
Timber, pine and juniper S. portion, none N. portion.

N. $0^{\circ} 13'$ W., along W. bdy. of sec. 6, T. 37 S., R. 6 W.

Over grassy pasture land.

- 2.58 The cor. of secs. 1 and 12, marked by a limestone 6x10x16 ins.; marks weathered away. This stone was identified by the property owner as the original corner.

At the corner point

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T37S	
R7W	R6W
S1	S6
S12	
1964	

Place original stone W. of corner.

Continue over grassy pasture land.

- 4.20 Mammoth Creek, 2 ft. deep, 20 lks. wide, flows E. irregular, continue over pasture land.
- 11.40 Net wire fence, bears W. and E., 30 lks.; thence N.
- 23.90 Leave grassy pasture; asc. gentle brushy S. slope.
- 32.90 Dirt road, bears NW. and SE.; asc. gentle S. slope.

Dependent Resurvey, West Boundary, T. 37 S., R. 6 W.

CHAINS

40.40 The $\frac{1}{2}$ sec. cor. of sec. 6, T. 37 S., R. 6 W., marked by an iron post, $2\frac{1}{2}$ ins. diam., set, mkd. and witnessed as described in the record of remonumentations, in 1961. At fence corner; fence bears N., S. and E.

N. $1^{\circ} 37'$ W., beginning new measurement.

Asc. gentle brushy S. slope.

2.21 The $\frac{1}{2}$ sec. cor. of sec. 1, T. 37 S., R. 7 W., marked by an iron post, $2\frac{1}{2}$ ins. diam., set, mkd. and witnessed as described in the record of remonumentations, in 1961. In N. and S. fence line, at base of small knoll.

Asc. 100 ft. over S. slope of knoll.

19.00 Knoll, desc. 75 ft. over gentle N. slope.

25.50 Base same knoll, curves SE. and SW., asc. 20 ft. over gentle S. slope.

40.40 Trail road, bears NE. and SW.

40.53 The cor. of Tps. 36 and 37 S., Rs. 6 and 7 W., marked by an iron post, $2\frac{1}{2}$ ins. diam., set, mkd. and witnessed as described in the record of remonumentations, in 1961. Falls in N. and S. fence line, by gate post.

Land, grassy pasture S. portion, rolling N. portion.
Soil, gravelly clay S. portion, gravelly N. portion.
Timber, none.

Dependent Resurvey, South Boundary, T. 36 S., R. 7 W.

Reestablishment of the Survey Executed by
Shadrach M. Richardson, Deputy Surveyor, in 1884

From the cor. of Tps. 36 and 37 S., Rs. 6 and 7 W., previously described.

N. $88^{\circ} 33'$ W., along the S. bdy. of sec. 36, T. 36 S., R. 7 W.

Over mountainous valley land, through scattered timber, along gentle S. slope.

6.70 Dirt road, bears N. and S.

22.50 Base of spur, bears N. and S., asc. 70 ft. over rocky E. slope.

30.50 Spur, slopes S., desc. 80 ft. over W. slope.

39.49 The $\frac{1}{2}$ sec. cor. of sec. 1, T. 37 S., R. 7 W., hereinafter described.

40.07 Point for the $\frac{1}{2}$ sec. cor. of sec. 36, T. 36 S., R. 7 W., at midpoint; there is no remaining evidence of original corner:

Dependent Resurvey, West Boundary, T. 37 S., R. 6 W.

CHAINS

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T36S R7W

$\frac{1}{2}$ S36

T37S R7W

1964

Set cedar post 6 ins. diam., 5 ft. high beside corner.

Cor. falls at base of W. slope of spur, thence along gentle S. slope.

- 43.70 Wash, 4 ft. deep, 20 lks. wide, drains S.
- 48.50 Wash, 3 ft. deep, 10 lks. wide, drains S. 20° E.
- 56.00 Low rise, slopes S., continue along gentle S. slope.
- 65.70 Dirt road, bears NW. and SE.
- 70.10 Wash, 4 ft. deep, 30 lks. wide, drains SE.
- 78.98 The closing cor. of secs. 1 and 2, T. 37 S., R. 7 W., hereinafter described.
- 80.14 The cor. of secs. 35 and 36, T. 36 S., R. 7 W., marked by an iron post, $2\frac{1}{2}$ ins. diam., set, mkd. and witnessed as described in the record of remonumentations, in 1961.

Land, rolling mountain valley.

Soil, gravelly clay.

Timber, scattered pinon and juniper on E. portion.

Undergrowth, sage.

N. $88^{\circ} 40'$ W., along the S. bdy. of sec. 35.

Over mountainous valley land, along gentle S. slope.

- 10.00 Enter broken and irregular lava bed.
- 39.125 The $\frac{1}{2}$ sec. cor. of sec. 2, T. 37 S., R. 7 W., hereinafter described.
- 40.21 Point for the $\frac{1}{2}$ sec. cor. of sec. 35, T. 36 S., R. 7 W., at midpoint; there is no remaining evidence of original corner.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., on solid rock, in a mound of stone 4 ft. base, to top, with brass cap mkd.

T36S R7W

$\frac{1}{2}$ S35

T37S R7W

1964

Continue over broken lava bed.

- 79.41 The closing cor. of secs. 2 and 3, T. 37 S., R. 7 W., hereinafter described.

Dependent Resurvey, South Boundary, T. 36 S., R. 7 W.

CHAINS

80.42

The cor. of secs. 34 and 35, T. 36 S., R. 7 W., marked by a lava stone 6x12x14 ins., marked 2 notches on E. and 4 notches on W. face:

from which

A pine stump, 36 ins. diam., bears N. 8° W., 166 lks. dist., mkd. BT.

At the corner point

Set an iron post 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T36S R7W

S34|S35

S3

T37S R7W

1964

from which

A pine 14 ins. diam., bears N. 46½° E., 151 lks. dist., mkd. T36S R7W S35 BT.

A pine 9 ins. diam., bears N. 50° W., 189 lks. dist., mkd. T36S R7W S34 BT.

Raise mound of stone 3 ft. base, 2½ ft. high, N. of corner.

Cor. falls 10 lks. N. of lava bed and 50 lks. S. of dirt road.

Land, mostly broken lava bed.

Soil, mostly lava boulders.

Timber, few pines on extreme W. portion.

N. 89° 36' W., along the S. bdy. of sec. 34.

Asc. 40 ft. over E. slope of broken lava bed.

18.965

The E.1/16 sec. cor. of sec. 3, T. 37 S., R. 7 W., hereinafter described. Asc. 40 ft. over broken W. slope of lava bed.

30.00

Top of ascent on lava bed, bears N. and S., desc. 60 ft. over broken W. slope of lava bed.

37.00

Leave lava bed, enter timber.

38.94

The ¼ sec. cor. of sec. 3, T. 37 S., R. 7 W., hereinafter described.

40.90

The ¼ sec. cor. of sec. 34, T. 36 S., R. 7 W., marked by a lava stone 10x12x16 ins., firmly set with top broken off, marked ¼.

from which

A pine, 30 ins. diam., bears N. 8½° E., 168 lks. dist., mkd. ¼ S BT.

Dependent Resurvey, South Boundary, T. 36 S. R. 7 W.

CHAINS

At the corner point

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, in a collar of stone, with brass cap mkd.

T36S R7W

 $\frac{1}{2}$ S34

T37S R7W

1964

from which

A pine, 34 ins. diam., bears N. 52° E., 67 lks. dist., mkd. $\frac{1}{2}$ S34 BT.

Place original stone N. of corner.

S. $86^\circ 17'$ W., beginning new measurement.

Over mountainous land, through heavy timber, asc. 75 ft. over SE. slope.

- .10 Old logging road, bears N. and S., 1 ch., thence SW.
- 7.20 Spur, slopes S., 5 chs. to end, desc. 10 ft. along S. slope.
- 14.50 Small wash, drains S., asc. 60 ft. along S. slope.
- 17.80 Spur, slopes S., continue along S. slope.
- 18.06 The W. 1/16 sec. cor. of sec. 3, T. 37 S., R. 7 W., hereinafter described. Asc. 20 ft. along S. slope.
- 38.08 The closing cor. of secs. 3 and 4, T. 37 S., R. 7 W., hereinafter described, at a position 0.11 chs. south of Tp. line.
- 38.90 The cor. of secs. 33 and 34, T. 36 S., R. 7 W., marked by a lava stone 8x12x14 ins., plainly mkd. 3 notches on E. and W. faces.

from which

A pine, 12 ins. diam., bears N. 45° W., 10 lks. dist., mkd. T36S R7W S33 BT.

A pine, 17 ins. diam., bears N. 45° E., 12 lks. dist., mkd. T36S R7W S34 BT.

At the corner point

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 14 ins. in the ground, in a mound of stone 4 ft. base, to top, with brass cap mkd.

T36S R7W

S33|S34

S4

T37S R7W

1964

Place original stone N. of corner.

Dependent Resurvey, South Boundary, T. 36 S., R. 7 W.

CHAINS

Note: from this cor. A pine, 18 ins. diam., bears N. 16° 10' W., 337 lbs. dist., mhd. T36S R7W S3 RT.
Another pine, 20 ins. diam., bears N. 11° N.W., 169 lbs. dist., mhd. T35 R7W S3 RT. These marks are of unofficial origin and were affixed.

Land, broken lava bed E. portion, mountainous W. portion
Soil, lava boulders E. portion, gravelly W. portion.
Timber, pine and Juniper W. portion.

N. 89° 44' W., along the S. div. of sec. 33.

Over mountainous land, through heavy timber, 100 ft. along broken S. slope.

24.30 Spur, slopes S., desc. 100 ft. over SW. corner.

39.01 The E. sec. cor. of secs. 33, T. 36 S., R. 7 W., marked by a lava stone 10x15x10 ins., in S. side of draw, plainly mhd. E.

from which

A dead fall, marked with sharp E. corner, 1.6 ins. diam., 1.6 ins. dist. The tree fall probably been moved by floods.

At the corner point

Set an iron post 30 ins. long, 1 1/2 ins. diam., set in the ground, in a mound of stone 4 ft. high, with brass cap mid.

T36S R7W

S3 RT

T35 R7W

S3 RT

Place original stone N. of corner.

N. 89° 13' W., beginning new measurement.

Desc. SW. slope, in bottom of draw.

15 The E. sec. cor. of secs. 34, T. 36 S., R. 7 W., as after described.

19.00 Wash in bottom of draw, drains SE., over SW. corner E. slope, through timber.

20.00 High spur, slopes S., desc. 100 ft. over SW. corner.

30.00 Draw, drains S., desc. 100 ft. over N. corner.

36.80 Spur, slopes S., desc. 50 ft. over SW. corner.

39.19 The cor. of secs. 33 and 34, T. 36 S., R. 7 W., marked by an iron post, 1 1/2 ins. diam., set, mhd. as described in the official record of same measurement, in 1961.

Dependent Resurvey, South Boundary, T. 36 S., R. 7 W.

CHAINS

Land, broken mountain.
Soil, gravelly and rocky.
Timber, pine.

Reestablishment of the Resurvey Executed by
Alfred B. Lewis, Deputy Surveyor, in 1897

N. 89° 46' W., along the S. bdy. of sec. 32.

Over mountainous land, through timber, desc. 20 ft.
over SW. slope.

.73 The closing cor. of secs. 4 and 5, hereinafter
described.

1.60 Head of small draw, drains S., asc. 55 ft. over SE.
slope.

7.30 Spur, slopes S., desc. 150 ft. over SW. slope.

16.70 Small draw, drains S., asc. 40 ft. along S. slope.

20.655 The E. 1/16 sec. cor. of sec. 5, T. 37 S., R. 7 W.,
hereinafter described. Asc. 20 ft. along S. slope.

22.80 Top of ascent on S. slope, desc. 60 ft. along S. slope.

40.58 Point for the $\frac{1}{4}$ sec. cor. of secs. 5 and 32, at pro-
portionate distance bet. the cor. of secs. 5, 6, 31
and 32, and the cor. of secs. 32 and 33, T. 36 S.,
R. 7 W., and midpoint bet. the cor. of secs. 5, 6, 31
and 32, and the closing cor. of secs. 4 and 5, T. 37 S.,
R. 7 W.; there is no remaining evidence of original cor.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 16 ins.
in the ground, in a collar of stone, with brass cap mkd.

T36S R7W

$\frac{1}{4}$ $\frac{S32}{S5}$

T37S R7W

1964

from which

A pine, 10 ins. diam., bears N. 30° E., 16 lks.
dist., mkd. $\frac{1}{4}$ S32 BT.

A pine, 8 ins. diam., bears S. 62° W., 38 lks.
dist., mkd. $\frac{1}{4}$ S5 BT.

Asc. 60 ft. along S. slope.

53:20 Enter burned area.

60.505 Point for the W. 1/16 sec. cor. of secs. 5 and 32, at
midpoint.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 16 ins.
in the ground; in a collar of stone, with brass cap mkd.

T36S R7W

W1/16 $\frac{S32}{S5}$

T37S R7W

1964

Dependent Resurvey, South Boundary, T. 36 S., R. 7 W.

CHAINS

from which

A pine, 8 ins. diam., bears N. 5° E., 16 lks.
dist., mkd. W1/16 S32 BT.

A pine, 10 ins. diam., bears S. 40° E., 10 lks.
dist., mkd. W1/16 S5 BT.

Continue along S. slope.

71.20 Slope changes, desc. 110 ft. over SW. slope, into
Mammoth Creek.

75.90 Graded gravel road, bears N. 20° W. and S. 20° E.

76.10 Mammoth Creek, 2 ft. deep, 20 lks. wide, flows SE.,
asc. 20 ft. over gentle E. slope, in canyon bottom.
In small clearing.

80.43 The cor. of secs. 5, 6, 31 and 32, marked by a wood
stake scribed with NW. cor. sec. 5, and iron stake
driven in the ground. This position compares closely
with the proportionate distance for this cor. and was
accepted as an acceptable determination by local survey.
There is no other evidence of original corner.

At the corner point

Set an iron post 30 ins. long, 2½ ins. diam., 24 ins.
in the ground, in a collar of stone, with brass cap
mkd.

T36S R7W

S31	S32
-----	-----

S6	S5
----	----

T37S R7W

1964

from which

A pine, 21 ins. diam., bears N. 46½° W., 50 lks.
dist., mkd. T36S R7W S31 BT.

A pine, 8 ins. diam., bears N. 37° E., 51 lks.
dist., mkd. T36S R7W S32 BT.

A spruce, 10 ins. diam., bears S. 55° E., 100 lks.
dist., mkd. T37S R7W S5 BT.

A pine, 12 ins. diam., bears S. 53° W., 92 lks. dist.,
mkd. T37S R7W S6 BT.

Note: from this cor. a lava stone 5x10x12 ins., in a
mound of stone, bears N. 31° 35' E., 4.33 chs. dist.,
mkd. 5 notches on E. and 1 notch on W. face.

from which

A pine, 30 ins. diam., bears N. 65° E., 90 lks.
dist., mkd. T36S R7W S32 BT.

The marks on this stone and tree are of unofficial
origin and were effaced.

Dependent Resurvey, South Boundary, T. 36 S., R. 7 W.

CHAINS

Land, broken mountain.
Soil, mountain gravel.
Timber, pine.

N. 88° 44' W., bet. secs. 6 and 31.

Over broken mountainous land, through timber, asc.
gentle E. slope, in canyon bottom.

- 1.10 Base steep ascent, bears N. and S. irregular, asc. 560
ft. over steep E. slope, covered with lava boulders.
- 22.10 Crest of steep ascent, bears N. and curves SW.; asc. 80f
over gentle E. slope, through dense timber.
- 29.20 Unimproved road, bears NW. and S. irregular.
- 40.16 Point for the $\frac{1}{2}$ sec. cor. of secs. 6 and 31, at pro-
portionate bearing and distance; there is no remaining
evidence of original corner.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 8 ins. in
the ground, to bedrock, in a mound of stone 4 ft. base,
to top, with brass cap mkd.

T36S R7W

$\frac{1}{2}$ S31
S6

T37S R7W

1964

from which

A pinon, 10 ins. diam., bears N. $40\frac{1}{2}^\circ$ E., 64 lks.
dist., mkd. $\frac{1}{2}$ S31 BT.

A pinon, 8 ins. diam., bears S. 70° W., 22 lks.
dist., mkd. $\frac{1}{2}$ S6 BT.

N. 76° 57' W., beginning new measurement.

Asc. 90 ft. over gentle NE. slope, through dense timber.

- 21.90 Slope changes, desc. 50 ft. along gentle N. slope.
- 29.66 The closing cor. of Tp. 37 S., Rgs. 7 and 8 W., marked
by an iron post, 3 ins. diam., set, mkd. and witnessed
as described in the official record of the resurvey of
the W. bdy. of T. 37 S., R. 7 W., in 1940.

Land, broken mountain.
Soil, gravelly with lava boulders.
Timber, pine and quaking asp.

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 37 S., R. 7 W., Salt Lake Meridian, Utah

Dependent Resurvey, T. 37 S., R. 7 W.

CHAINS

Reestablishment of the Survey Executed by Robert
E. Lee Collier, Deputy Surveyor, in 1895

From the cor. of secs. 13 and 24, on the E. bdy. of the
Tp.

S. 89° 35' W., bet. secs. 13 and 24.

Over broken mountain land, through timber, asc. 30 ft.
over broken SE. slope.

14.50 Base of steep ascent, bears S. and NE., asc. 350 ft.
over steep E. slope.

31.40 Ridge, bears S. 10° W. and curves NE., desc. 200 ft.
over steep W. slope.

39.83 The 1/4 sec. cor. of secs. 13 and 24, determined by an
unmarked sandstone 6x12x14 ins., set in small mound of
stone.

from which

A pine, 30 ins. diam., bears N. 2° W., 12 lks.
dist. mkd. 1/4 S BT.

At the corner point

Set an iron post 30 ins. long, 2 1/2 ins. diam., 16 ins.
in the ground, in a collar of stone, with brass cap mkd.

T37S R7W

1/4 $\frac{S13}{S24}$

1964

from which

A pine, 8 ins. diam., bears S. 6 1/2° W., 218 lks.
dist., mkd. 1/4 S24 BT.

S. 89° 32' W., beginning new measurement.

Desc. 180 ft. over E. slope.

9.00 Small draw, drains NW., desc. 120 ft. along NW. slope.

16.50 Base steep descent, bears NE. and SW., desc. 30 ft.
over gentle NW. slope.

27.70 Swale, drains N., asc. 40 ft. over gentle E. slope.

40.19 The cor. of secs. 13, 14, 23 and 24, marked by a lime-
stone 6x12x15 ins., dimly mkd. 3 notches on S. and 1
notch on E. face, mound of stone W. of corner.

from which

A pine, 24 ins. diam., bears S. 26° E., 101 lks.
dist., properly mkd.

Dependent Resurvey, T. 37 S., R. 7 W.

CHAINS

A dead fall, bears N. 79° E., 82 lks. dist., properly mkd.

At the corner point

Set an iron post 30 ins. long, 2½ ins. diam., 16 ins. in the ground, in a mound of stone 4 ft. base, to top, with brass cap mkd.

T37S R7W

S14	S13
S23	S24

1964

from which

A pine, 10 ins. diam., bears N. 22½° E., 67 lks. dist., mkd. T37S R7W S13 BT.

A pine, 10 ins. diam., bears S. 62½° E., 19 lks. dist., mkd. T37S R7W S24 BT.

A pine, 12 ins. diam., bears S. 32½° W., 56 lks. dist., mkd. T37S R7W S23 BT.

A pine, 12 ins. diam., bears N. 57½° W., 32 lks. dist., mkd. T37S R7W S14 BT.

Place original stone W. of corner.

Land, broken mountain.

Soil, gravelly.

Timber, pine.

N. 0° 08' W., bet. secs. 13 and 14.

Over broken mountain land, through heavy timber, desc. 30 ft. along E. slope of spur.

14.30 Crest of spur, slopes N., desc. 40 ft. over N. slope on top of spur.

22.60 Gravel road, Hatch Pt. to Panguich Lake, bears E. and curves SW., desc. 25 ft. over N. slope.

24.80 Wash in low pass, drains N. 80° E., asc. 30 ft. over irregular lava boulders.

40.19 The ¼ sec. cor. of secs. 13 and 14, marked by a lava stone 4x24x24 ins., plainly mkd. ½. There is no evidence of original bearing trees.

At the corner point

Set an iron post 30 ins. long, 2½ ins. diam., in rocky lava bed, in mound of stone 4 ft. base, to top, with brass cap mkd.

T37S R7W

½	S14	S13
---	-----	-----

1964

Dependent Resurvey, T. 37 S., R. 7 W.

CHAINS

from which

A pinon, 10 ins. diam., bears N. $5\frac{1}{2}^{\circ}$ E., 112 lks. dist., mkd. T37 S R7W $\frac{1}{2}$ S13 BT.

A pinon, 8 ins. diam., bears N. $33\frac{1}{2}^{\circ}$ W., 90 lks. dist., mkd. T37S R7W $\frac{1}{2}$ S14 BT.

Place original stone W. of corner.

N. $0^{\circ} 03'$ W., beginning new measurement.

Continue over lava bed.

- .50 Leave lava bed, asc. 25 ft. over S. slope, through scattered lava boulders.
- 8.70 Base steep ascent, bears NE. and SW., asc. 115 ft. over rocky SE. slope.
- 13.00 S. crest low ridge, bears NE. and SW., desc. 10 ft. over top of ridge.
- 20.00 Point for the N. 1/16 sec. cor. of secs. 13 and 14, at midpoint.
- Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, in a collar of stone, with brass cap mkd.

T37S R7W

N 1/16

S14|S13

1964

from which

A pine, 8 ins. diam., bears S. $69\frac{1}{2}^{\circ}$ E., 81 lks. dist., mkd. N1/16 S13 BT.

A pine, 6 ins. diam., bears S. 18° W., 47 lks. dist., mkd. N1/16 S14 BT.

Desc. 15 ft. over gentle N. slope, on top of ridge.

- 23.80 Bulldozed road, bears E. and W. irregular.
- 29.70 N. crest of ridge, bears NE. and SW. irregular, desc. 100 ft. over rocky NW. slope.
- 36.00 Base of ridge, bears NE. and SW., desc. 10 ft. over gentle N. slope.
- 39.50 Wash, 4 ft. deep, 30 lks. wide, drains N. 70° E.
- 40.00 The cor. of secs. 11, 12, 13 and 14, marked by a sandstone $7 \times 10 \times 18$ ins., plainly mkd. 4 notches on S. and 1 notch on E. face. Original bearing trees have probably been removed by logging work.

Dependent Resurvey, T. 37 S., R. 7 W.

CHAINS

At the corner point

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, in a collar of stone, with brass cap mkd.

T37S R7W

S11	S12
S14	S13

1964

from which

A red cedar, 10 ins. diam., bears N. 68° E., 142 lks. dist., mkd. T37S R7W S12 BT.

A pine, 8 ins. diam., bears N. $61\frac{1}{2}^\circ$ W., 24 lks. dist., mkd. T37S R7W S11 BT.

Place original stone N. of corner.

Land, broken.

Soil, gravel and lava bed.

Timber, pine and quaking asp.

From the cor. of secs. 12 and 13, on the E. bdy. of the Tp.

N. $89^\circ 56'$ W., bet. secs. 12 and 13.

Over broken mountainous land, through timber, asc. 110 ft. over SE. slope, across lava boulders.

13.50

S. crest of ridge, bears NE. and SW. irregular, thence over top of ridge.

40.11

Point for the $\frac{1}{2}$ sec. cor. of secs. 12 and 13, at midpoint; there is no evidence of original corner.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, in a collar of stone, with brass cap mkd.

T37S R7W

$\frac{1}{2}$	S12
	S13

1964

from which

A pine, 8 ins. diam., bears S. $47\frac{1}{2}^\circ$ W., 31 lks. dist., mkd. $\frac{1}{2}$ S13 BT.

A pine, 20 ins. diam., bears N. 26° W., 158 lks. dist., mkd. $\frac{1}{2}$ S12 BT.

Desc. 20 ft. over gentle NW. slope on top of ridge.

57.00

N. crest of ridge, bears NE. and SW., desc. 70 ft. over NW. slope, over lava boulders.

60.165

Point for the W. $\frac{1}{16}$ sec. cor. of secs. 12 and 13, at midpoint.

Dependent Resurvey, T. 37 S., R. 7 W.

CHAINS

Set an iron post 30 ins. long, 2½ ins. diam., 14 ins. in the ground, in a mound of stone 4 ft. base, to top, with brass cap mkd.

T37S R7W

W1/16 S12
S13

1964

from which

A pine, 18 ins. diam., bears N. 37½° E., 26 lks. dist., mkd. W1/16 S12 BT.

A red cedar, 8 ins. diam., bears S. 38° E., 46 lks. dist., mkd. W1/16 S13 BT.

Desc. 60 ft. over rocky NW. slope.

71.00

Base of descent, bears NE. and SW., thence along gentle N. slope, in clearing.

76.50

Wash, 5 ft. deep, 40 lks. wide, drains N. 70° E.

80.22

The cor. of secs. 11, 12, 13 and 14.

Land, broken.

Soil, gravelly with lava boulders.

Timber, pine and quaking asp.

N. 0° 10' W., bet. secs. 11 and 12.

Over broken mountainous land, asc. 10 ft. over gentle S. slope.

2.00

Unimproved road, bears NE. and SW. irregular, asc. 110 ft. over steep S. slope.

9.50

Spur, slopes E., asc. 80 ft. along broken and irregular E. slope.

21.20

Small draw, drains SE., asc. 300 ft. over broken S. slope.

39.90

Ridge, bears E. and W., desc. N. slope on top of ridge.

40.03

The ¼ sec. cor. of secs. 11 and 12, marked by a sandstone 8x10x14 ins., plainly mkd. ¼. Logging work has removed positive evidence of original bearing trees.

At the corner point

Set an iron post 30 ins. long, 2½ ins. diam., 20 ins. in the ground, in a collar of stone, with brass cap mkd.

T37S R7W

¼
S11 | S12

1964

from which

Dependent Resurvey, T. 37 S., R. 7 W.

CHAINS

A pine, 14 ins. diam., bears N. 15° E., 21 lks. dist., mkd. $\frac{1}{2}$ S12 BT.

A pine, 16 ins. diam., bears West, 12 lks. dist., mkd. $\frac{1}{2}$ S11 BT.

Place original stone W. of corner.

N. 0° 15' W., beginning new measurement.

Desc. 500 ft. over broken N. slope, along top of spur, which slopes N.

37.50 Base of steep descent, bears E. and W. irregular, desc. gentle N. slope, through scattered timber.

40.06 The cor. of secs. 1, 2, 11 and 12, marked by a sandstone 10x12x20 ins., mkd. 5 notches on S. and 1 notch on E. face.

from which

A pine, 24 ins. diam., bears S. 31 $\frac{1}{2}$ ° E., 160 lks., mkd. T37S R7W S12 BT.

At the corner point

Set an iron post 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T37S R7W

S2	S1
S11	S12

1964

from which

A pine, 12 ins. diam., bears S. 6° W., 110 lks. dist., mkd. T37S R7W S11 BT.

Raised mound of stone 3 ft. base, 2 $\frac{1}{2}$ ft. high, W. of corner.

Place original stone W. of corner.

Land, broken mountain.
Soil, gravelly with some exposed sandstone.
Timber, pine, juniper some quaking asp.

From the cor. of secs. 1 and 12, on the E. bdy. of the Tp.

N. 89° 49' W., bet. secs. 1 and 12.

Over grassy pasture land, draining N.

6.00 Mammoth Creek, 1 ft. deep, 40 lks. wide, flows N. 30° E., thence over neck of land.

7.50 Same creek, drains SE., continue over pasture land.

14.50 Curve in dirt road, bears W. and S., thence along N. side of road.

Dependent Resurvey, T. 37 S., R. 7 W.

CHAINS

- 29.50 Dirt road, bears NW. and SE., also base of spur, bears NE. and SW., asc. 120 ft. over NE. slope, enter timber.
- 40.07 The 1/4 sec. cor. of secs. 1 and 12, marked by a sandstone 6x10x18 ins., mkd. $\frac{1}{2}$.
from which
A pine, 18 ins. diam., bears S. 50° W., 27 lks., mkd. $\frac{1}{2}$ S BT.
At the corner point
Set an iron post 30 ins. long, 2½ ins. diam., 15 ins. in the ground, in a mound of stone, 3 ft. base, to top, with brass cap mkd.
T37S R7W
 $\frac{1}{2} \frac{S1}{S12}$
1964
from which
A pine, 15 ins. diam., bears N. 70° E., 20 lks. dist., mkd. $\frac{1}{2}$ S1 BT.
Place original stone N. of corner.

N. 89° 55' W., beginning new measurement.
Asc. 25 ft. over NE. slope.
- 1.70 Spur, slopes N., desc. 40 ft. over W. slope.
- 3.30 Small ravine, drains N., asc. 40 ft. over E. slope.
- 6.60 Spur, slopes N., desc. 70 ft. over W. slope.
- 12.00 Base of spur, bears N. and S. irregular, desc. 20 ft. along broken N. slope, through scattered timber.
- 32.00 Wash, 3 ft. deep, 20 lks. wide, drains N., asc. 30 ft. along N. slope.
- 40.09 The cor. of secs. 1, 2, 11 and 12.
Land, pasture E. portion, mountainous W. portion.
Soil, clay E. portion, gravelly and rocky W. portion.
Timber, none E. portion, pine W. portion.
-
- N. 0° 04' W., bet. secs. 1 and 2.
Over broken land, desc. 60 ft. over gentle NE. slope, through scattered timber.
- 36.00 Enter willows and meadow land, leave timber.
- 37.50 Mammoth Creek, 2 ft. deep, 20 lks. wide, drains N. 50° E., asc. gentle S. slope.

Dependent Resurvey, T. 37 S., R. 7 W.

CHAINS

- 40.06 The 1/4 sec. cor. of secs. 1 and 2, marked by a lava stone 6x16x20 ins., plainly mkd. $\frac{1}{4}$.

At the corner point

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T37S R7W

$\frac{1}{4}$
S2 | S1

1964

Raised mound of stone $2\frac{1}{2}$ ft. base, 3 ft. high W. of corner.

Place original stone W. of corner.

N. $0^{\circ} 14'$ W., beginning new measurement.

Asc. gentle S. slope.

- 15.60 S. foot of lava bed, bears NE. and SW., thence over lava bed.

- 20.17 Point for the N. 1/16 sec. cor. of secs. 1 and 2, at proportionate distance.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., in lava boulders, in a mound of stone 4 ft. base, to top, with brass cap mkd.

T37S R7W

N1/16
S2 | S1

1964

Continue over lava boulders.

- 34.50 N. edge lava bed, bears NW. and curves SE., thence over brushland.

- 40.01 The closing cor. of secs. 1 and 2, on the N. bdy. of the Tp., marked by an iron post $2\frac{1}{2}$ ins. diam., set, mkd. and witnessed as described in the official record of re-monumentations, in 1961.

From this closing cor., the cor. of secs. 35 and 36, T. 36 S., R. 7 W., bears N. $88^{\circ} 33'$ W., 1.16 chs. dist., previously described.

Land, broken N. and S. portions, pasture in center.

Soil, gravelly, with lava bed on N. portion.

Timber, scattered pine S. portion, none N. portion.

Point for the N. 1/4 sec. cor. of sec. 1, on the N. bdy. of the Tp., and midpoint bet. the cor. of Tps. 36 and 37 S., Rs. 6 and 7 W., and the closing cor. of secs. 1 and 2.

Dependent Resurvey, T. 37 S., R. 7 W.

CHAINS

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T36S R7W

 $\frac{1}{4}$ $\frac{S1}{S1}$

T37S R7W

1964

Set cedar post, 6 ins. diam., 5 ft. long, beside corner.

From this corner, the $\frac{1}{4}$ sec. cor. of sec. 36, T. 36 S., R. 7 W., bears N. $88^{\circ} 33'$ W., 0.58 chs. dist., previously described.

From the cor. of secs. 13, 14, 23 and 24.

S. $89^{\circ} 52'$ W., bet. secs. 14 and 23.

Over mountainous land, through dense timber, asc. 20 ft. over E. slope.

- 2.80 Low spur, slopes N., desc. 60 ft. over gentle W. slope.
- 15.50 Enter small grassy clearing.
- 24.00 Leave clearing, enter dense timber, asc. 100 ft. over gentle E. slope.
- 33.90 Low spur, slopes N., desc. 55 ft. over W. slope.
- 39.40 Gravel road, Hatch to Panguich Lake, bears N. 35° E. and S. 35° W.
- 40.07 Point for the $\frac{1}{4}$ sec. cor. of secs. 14 and 23, at midpoint; there is no remaining evidence of original cor.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., on solid rock, in a mound of stone 5 ft. base, to top, with brass cap mkd.

T37S R7W

 $\frac{1}{4}$ $\frac{S14}{S23}$

1964

Cor. falls in small swale, draining NE.

Asc. 60 ft. over gentle NE. slope, through dense timber.

- 62.00 Gravel road, bears N. 30° W. and S. 30° E.

- 80.14 The cor. of secs. 14, 15, 22 and 23, marked by a lava stone $12 \times 16 \times 20$ ins., mkd. 3 notches on S. and 2 notches on E. faces.

from which

A dead fall bears S. $38\frac{1}{2}^{\circ}$ E., 49 lks. dist., properly mkd. Other bearing trees destroyed by logging work.

Dependent Resurvey, T. 37 S., R. 7 W.

CHAINS

At the corner point

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 12 ins. in the ground, in a mound of stone 4 ft. base, to top, with brass cap mkd.

T37S R7W

S15	S14
S22	S23

1964

from which

A pine, 10 ins. diam., bears N. $7\frac{1}{2}^{\circ}$ E., 113 lks. dist., mkd. T37S R7W S14 BT.

A pine, 10 ins. diam., bears S. $41\frac{1}{2}^{\circ}$ E., 17 lks. dist., mkd. T37S R7W S23 BT.

A pine, 14 ins. diam., bears S. $41\frac{1}{2}^{\circ}$ W., 43 lks. dist., mkd. T37S R7W S22 BT.

A pine, 10 ins. diam., bears N. $70\frac{1}{2}^{\circ}$ W., 69 lks. dist., mkd. T37S R7W S15 BT.

Place original stone W. of corner.

Land, broken.

Soil, mountain gravel.

Timber, pine and quaking asp.

N. $0^{\circ} 20'$ W., bet. secs. 14 and 15.

Over broken mountain land, through dense timber, asc. 20 ft.

16.50 Gravel road, bears NW. and SE.

19.20 Base of lava rise, bears E. and W., asc. 30 ft. over S. slope.

21.40 Crest same rise, bears E. and W., desc. 45 ft. over gentle N. slope.

34.80 Leave timber, enter Houston Flat.

40.14 The $\frac{1}{4}$ sec. cor. of secs. 14 and 15, marked by a lava stone $6 \times 12 \times 14$ ins., mkd. $\frac{1}{2}$.

from which

A stump bears N. 24° E., 355 lks. dist.

At the corner point

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T37S R7W

S15	S14
-----	-----

1964

Dependent Resurvey, T. 37 S., R. 7 W.

CHAINS

Place original stone W. of corner.

N. 0° 06' W., beginning new measurement.

Asc. 60 ft. over gentle S. slope.

- 5.00 Leave Houston Flat, enter timber.
- 14.80 Unimproved road, bears E. and W. irregular.
- 20.03 Point for the N. 1/16 sec. cor. of secs. 14 and 15, at midpoint.

Set an iron post 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T37S R7W

N1/16

S15|S14

1964

from which

A red cedar, 8 ins. diam., bears N. 55½° E., 23 lks. dist., mkd. N1/16 S14 BT.

A pine, 24 ins. diam., bears west, 41 lks. dist., mkd. N1/16 S15 BT.

- 40.06 The cor. of secs. 10, 11, 14 and 15, marked by a sandstone 8x8x14 ins., mkd. 4 notches on S. and 2 notches on E. face.

from which

A pine, 36 ins. diam., bears N. 31° E., 277 lks. dist., mkd. T37S R7W S11 BT.

A pine, 40 ins. diam., bears S. 14° E., 96 lks. dist., mkd. T37S R7W S14 BT.

A pine, 20 ins. diam., bears S. 46½° W., 215 lks. dist., mkd. T37S R7W S15 BT.

A pine, 40 ins. diam., bears N. 84° W., 255 lks. dist., mkd. T37S R7W S10 BT.

At the corner point

Set an iron post 30 ins. long, 2½ ins. diam., 20 ins. in the ground, in a collar of stone, with brass cap mkd.

T37S R7W

S10|S11

S15|S14

1964

Place original stone W. of corner.

Dependent Resurvey, T. 37 S., R. 7 W.

CHAINS

land, broken.
Soil, gravelly.
Timber, pine and quaking asp.

From the cor. of secs. 11, 12, 13 and 14.

S. 89° 52' W., bet. secs. 11 and 14.

Over mountainous land, through timber, asc. 20 ft. over SE. slope.

- 5.00 Road, bears N. 50° E. and S. 50° W., asc. 160 ft. over broken SE. slope.
- 31.00 Spur, slopes SE., desc. 30 ft. over W. slope.
- 37.00 Small ravine, drains SE., asc. 25 ft. over E. slope.
- 40.08 Point for the $\frac{1}{2}$ sec. cor. of secs. 11 and 14, at midpoint there is no evidence of original corner.
- Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 22 ins. in the ground, in a collar of stone, with brass cap mkd.

T37S R7W

$\frac{1}{2}$ $\frac{S11}{S14}$

1964

from which

A pine, 12 ins. diam., bears S. 57° W., 22 lks. dist., mkd. $\frac{1}{2}$ S14 BT.

A pine, 14 ins. diam., bears N. 60° W., 110 lks. dist., mkd. $\frac{1}{2}$ S11 BT.

Asc. 40 ft. over E. slope.

- 44.00 Low spur, slopes S., thence along irregular S. slope, through timber.
- 80.16 The cor. of secs. 10, 11, 14 and 15.
- Land, broken.
Soil, gravelly.
Timber, pine and few juniper..
- N. 0° 20' W., bet. secs. 10 and 11.
- Over mountainous land, through dense timber, asc. 90 ft. over gradual S. slope.
- 23.50 Base of steep ascent, bears E. and W., asc. 250 ft. over steep S. slope.
- 39.95 The $\frac{1}{4}$ sec. cor. of secs. 10 and 11, marked by a sandstone 6x12x18 ins., plainly mkd. $\frac{1}{2}$.

from which

Dependent Resurvey, T. 37 S., R. 7 W.

CHAINS

A pine, 24 ins. diam., bears N. 35° E., 112 lks.
dist., mkd. $\frac{1}{2}$ S BT.

At the corner point

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 15 ins. in
the ground, in a mound of stone 3 ft. base, to top, with
brass cap mkd.

T37S R7W

$\frac{1}{2}$
S10 | S11

1964

from which

A cedar, 12 ins. diam., bears S. 69 $\frac{1}{2}$ ° E., 133 lks.
dist., mkd. $\frac{1}{2}$ S11 BT.

A pine, 24 ins. diam., bears S. 88 $\frac{1}{2}$ ° W., 31 lks.
dist., mkd. $\frac{1}{2}$ S10 BT.

Place original stone W. of corner.

N. 0° 24' W., beginning new measurement.

Asc. 100 ft. over steep S. slope.

4.00 S. crest of ridge, bears E. and W., thence over barren top
of ridge.

10.06 Point for the S-N 1/64 sec. cor. of secs. 10 and 11, at
midpoint.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins.
in the ground, in a collar of stone, with brass cap mkd.

T37S R7W

S-N1/64

S10 | S11

1964

Desc. 10 ft. over top of ridge.

16.60 N. crest same ridge, bears E. and W., desc. 70 ft. over
steep N. slope, through timber.

20.12 Point for the N. 1/16 sec. cor. of secs. 10 and 11, at
midpoint.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in
the ground, in collar of stone, with brass cap mkd.

T37S R7W

N1/16

S10 | S11

1964

from which

Dependent Resurvey, T. 37 S., R. 7 W.

CHAINS

- A spruce, 12 ins. diam., bears S. 67° E., 21 lks. dist., mkd. 1/16 S11 BT.
- A spruce, 10 ins. diam., bears N. 68½° W., 34 lks. dist., mkd. 1/16 S10 BT.
- Desc. 300 ft. over broken N. slope.
- 31.00 Slope changes, desc. 180 ft. over broken NE. slope.
- 40.24 The cor. of secs. 2, 3, 10 and 11, marked by a sandstone, 10x12x16 ins., mkd. 5 notches on S. and 2 notches on E. face.
- from which
- A pine, 15 ins. diam., bears N. 60° E., 32 lks. dist., mkd. T37S R7W S2 BT.
- A red cedar, 12 ins. diam., bears S. 50° E., 40 lks. dist., mkd. T37S R7W S11 BT.
- A pine, 18 ins. diam., bears S. 15° W., 35 lks. dist., mkd. T37S R7W S10 BT.
- A pine, 12 ins. diam., bears N. 30° W., 19 lks. dist., mkd. T37S R7W S3 BT.
- At the corner point
- Set an iron post 30 ins. long, 2½ ins. diam., 16 ins. in the ground, in a collar of stone, with brass cap mkd.
- | | |
|----------|-----|
| T37S R7W | |
| S3 | S2 |
| S10 | S11 |
| 1964 | |
- Place original stone W. of corner.
- Land, broken mountain.
Soil, gravelly.
Timber, pine, juniper and quaking asp.
- From the cor. of secs. 1, 2, 11 and 12.
- S. 89° 54' W., bet. secs. 2 and 11.
- Over mountainous land, through timber, asc. 50 ft. along broken N. slope.
- 14.00 Wash, 3 ft. deep, 20 lks. wide, drains NE., asc. 120 ft. over E. slope.
- 33.40 High spur, slopes N., desc. 60 ft. over W. slope.
- 35.00 Small ravine, drains N., asc. 50 ft. over NE. slope.
- 37.50 Small spur, slopes N., desc. 20 ft. over NW. slope.
- 39.74 The 1/4 sec. cor. of secs. 2 and 11, marked by a sandstone 6x10x12 ins., plainly mkd. ¼.

Dependent Resurvey, T, 37 S., R. 7 W.

CHAINS

from which

A pine, 36 ins. diam., bears S. 75° W., 97 lks.
dist., mkd. $\frac{1}{2}$ S BT.

At the corner point

Set an iron post 30 ins. long, 2½ ins. diam., 10 ins. in
the ground, in a mound of stone 4 ft. base, to top, with
brass cap mkd.

T37S R7W

$\frac{1}{2}$ $\frac{S2}{S11}$

1964

from which

A pine, 12 ins. diam., bears S. 40° E., 24 lks.
dist., mkd. $\frac{1}{2}$ S11 BT.

A pine, 10 ins. diam., bears N. 45° W., 6 lks.
dist., mkd. $\frac{1}{2}$ S2 BT.

Place original stone N. of corner.

N. 89° 51' W., beginning new measurement.

Desc. 40 ft. along broken N. slope, through timber.

13.10 Draw, drains N. 20° E., asc. 200 ft. over E. slope.

24.00 Spur, slopes N., desc. 60 ft. over NW. slope.

32.00 Ravine, drains NE., asc. 140 ft. over broken NE. slope.

40.70 The cor. of secs. 2, 3, 10 and 11.

Land, broken mountain.

Soil, gravelly with exposed sandstone.

Timber, pine and some juniper.

N. 0° 04' W., bet. secs. 2 and 3.

Over broken mountainous land, through timber, asc. 55 ft.
over ledgy and broken SE. slope.

6.70 Top of ascent on SE. slope, desc. 105 ft. along ledgy
E. slope.

20.03 Point for the S. 1/16 sec. cor. of secs. 2 and 3, at
midpoint.

Set an iron post 30 ins. long, 2½ ins. diam., 8 ins. in
the ground, in a mound of stone 4 ft. base, to top, with
brass cap mkd.

T37S R7W

S1/16

S3|S2

1964

Dependent Resurvey, T. 37 S., R. 7 W.

CHAINS

from which

An X, 6 ins. high, on sandstone outcrop, bears
S. 30° W., 27 lks. dist.

- 20.30 Spur, slopes NE., desc. 320 ft. over irregular NW. slope.
40.06 The 1/4 sec. cor. of secs. 2 and 3, marked by a limestone
6x12x24 ins., plainly mkd. ½.

from which

A pine, 16 ins. diam., bears N. 35° E., 33 lks.
dist., mkd. ½ S BT.

A pine, 15 ins. diam., bears N. 85° W., 14 lks.
dist., marks not legible, remarked ½ S3 BT.

At the corner point

Set an iron post 30 ins. long, 2½ ins. diam., 20 ins. in
the ground, in a collar of stone, with brass cap mkd.

T37S R7W

½
S3 | S2
1964

Corner falls in head of draw, at base of mountain.

Place original stone N. of corner.

N. 0° 19' W., beginning new measurement.

Desc. 40 ft. over gentle N. slope.

- 9.50 Mammoth Creek, 1 ft. deep, 20 lks. wide, flows E., asc.
30 ft. over S. slope.
13.00 Base of lava bed, bears E. and W. irregular, asc. 110 ft.
over steep S. slope of lava bed.
20.90 S. crest of lava bed, bears E. and W. irregular, thence
over lava boulders, leave timber.
21.44 Point for the N. 1/16 sec. cor. of secs. 2 and 3, at
proportionate distance.

Set an iron post 30 ins. long, 2½ ins. diam., on solid
lava, in a mound of stone 4 ft. base, to top, with brass
cap mkd.

T37S R7W

N1/16
S3 | S2
1964

Desc. 20 ft. over lava bed.

- 41.98 Intersect the N. bdy. of the Tp.

Dependent Resurvey, T. 37 S., R. 7 W.

CHAINS

Point for the closing cor. of secs. 2 and 3, at record distance from the cor. of secs. 34 and 35, T. 36 S., R. 7 W.; the original stone was found close by, but has been disturbed by road work.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T36S R7W
 $\frac{S35}{S3|S2}$
 C|C
 T37S R7W
 1964

Raised mound of stone 3 ft. base, $2\frac{1}{2}$ ft. high S. of corner.

Corner falls 20 lks. N. of lava bed.

From this closing corner, the cor. of secs. 34 and 35, T. 36 S., R. 7 W., bears N. $88^{\circ} 40' W.$, 1.01 chs. dist., previously described.

Land, broken.

Soil, gravelly S. portion, lava bed N. portion.

Timber, pine and juniper on S. portion.

Point for the N. $\frac{1}{4}$ sec. cor. of sec. 2, on the N. bdy. of the Tp. and midpoint bet. the closing cor. of secs. 1 and 2, and the closing cor. of secs. 2 and 3.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., on solid lava stone, in a mound of stone 4 ft. base, to top, with brass cap mkd.

T36S R7W
 $\frac{S2}{S2}$
 T37S R7W
 1964

From this cor., the $\frac{1}{4}$ sec. cor. of sec. 35, T. 36 S., R. 7 W., bears N. $88^{\circ} 40' W.$, 1.085 chs. dist., previously described.

From the cor. of secs. 14, 15, 22 and 23.

S. $89^{\circ} 52' W.$, bet. secs. 15 and 22.

Over mountainous land, through heavy timber; asc. 50 ft. over gradual E. slope.

24.50 Enter lava boulders; asc. 85 ft. over broken E. slope.

40.19 The $\frac{1}{4}$ sec. cor. of secs. 15 and 22, marked by a lava stone $8 \times 15 \times 20$ ins., plainly mkd. $\frac{1}{2}$.

from which

A pine, 30 ins. diam., bears S. $40^{\circ} W.$, 91 lks. dist., marks illegible, remarked $\frac{1}{2}$ S22 BT.

Dependent Resurvey, T. 37 S., R. 7 W.

CHAINS

A pine, 24 ins. diam., bears N. 15° W., 98 lks. dist., marks illegible, remarked 1/2 S15 BT.

At the corner point

Set an iron post 30 ins. long, 2 1/2 ins. diam., 10 ins. in the ground, in a mound of stone 4 ft. base, to top, with brass cap mkd.

T37S R7W
1/2 S15
S22
1964

Place original stone N. of corner.

S. 89° 55' W., beginning new measurement.

Asc. 120 ft. over gradual E. slope, through timber, over lava rocks.

40.21

The corner of secs. 15, 16, 21 and 22, marked by a lava stone 6x10x18 ins., mkd. 3 notches on S. and E. faces.

from which

A pine, 24 ins. diam., bears S. 71° E., 70 lks. dist., mkd. T37S R7W S22BT.

A cedar, 9 ins. diam., bears S. 39° W., 67 lks. dist., mkd. T37S R7W S21 BT.

At the corner point

Set an iron post 30 ins. long, 2 1/2 ins. diam., in lava boulders, in a mound of stone 4 ft. base, to top, with brass cap mkd.

T37S R7W
S16 | S15
S21 | S22
1964

from which

A red cedar, 6 ins. diam., bears N. 13° W., 59 lks. dist., mkd. T37S R7W S16 BT.

Place original stone W. of corner.

Land, broken.

Soil, gravelly E. portion, rocky W. portion.

Timber, pine, cedar and quaking asp.

N. 0° 13' W., bet. secs. 15 and 16.

Over broken lava formation, through timber; asc. 55 ft. along gentle E. slope.

40.14

The 1/4 sec. cor. of secs. 15 and 16, marked by a lava stone 8x12x16 ins., plainly mkd. 1/2.

At the corner point

Set an iron post 30 ins. long, 2 1/2 ins. diam., in lava

Dependent Resurvey, T. 37 S., R. 7 W.

CHAINS

boulders, in a mound of stone 4 ft. base, to top, with brass cap mkd.

T37S R7W

$$\frac{1}{4}$$

S16	S15
-----	-----

1964

from which

A pine, 20 ins. diam., bears N. 60° E., 121 lks. dist., mkd. $\frac{1}{4}$ S15 BT.

A pine, 20 ins. diam., bears N. 58° W., 114 lks. dist., mkd. $\frac{1}{4}$ S16 BT.

Place original stone W. of corner.

N. 0° 12' W., beginning new measurement.

Continue along E. slope, over lava formation.

24.90 Crest of low lava rise, bears E. and W., continue along E. slope.

40.16 The cor. of secs. 9, 10, 15 and 16, marked with an iron post 2½ ins. diam., set, mkd. and witnessed as described in the official record of remonumentations, in 1962.

Land, broken.

Soil, gravelly with lava boulders.

Timber, pine, juniper and quaking asp.

From the cor. of secs. 10, 11, 14 and 15.

S. 89° 58' W., bet. secs. 10 and 15.

Over mountainous land, through timber, asc. 65 ft. over gradual SE. slope.

40.20 Point for the $\frac{1}{4}$ sec. cor. of secs. 10 and 15, at midpoint; there is no remaining evidence of original corner.

Set an iron post 30 ins. long, 2½ ins. diam., 24 ins. in the ground, in a collar of stone, with brass cap mkd.

T37S R7W

$$\frac{1}{4} \frac{S10}{S15}$$

1964

from which

A pine, 8 ins. diam., bears N. 8½° E., 38 lks. dist., mkd. $\frac{1}{4}$ S10 BT.

A pine, 8 ins. diam., bears S. 29½° E., 62 lks. dist., mkd. $\frac{1}{4}$ S15 BT.

Dependent Resurvey, T. 37 S., R. 7 W.

CHAINS

- Asc. 10 ft. over SE. slope.
- 50.00 Base of steeper ascent, bears N. and S., asc. 120 ft. over irregular SE. slope.
- 70.50 Ridge, bears N. and S. irregular, desc. 70 ft. over SW. slope.
- 78.40 Gravel road, Hatch to Panguich Lake, bears NW. and SE.
- 80.40 The cor. of secs. 9, 10, 15 and 16.
- Land, broken mountain.
Soil, gravelly.
Timber, pine and quaking asp.
- N. 0° 19' W., bet. secs. 9 and 10.
- Over broken mountain land, through timber, asc. 50 ft. along W. slope.
- .40 Gravel road, bears NW. and SE.
- 7.40 Spur, slopes W., desc. 250 ft. over NW. slope.
- 29.00 Enter canyon, desc. 75 ft. over NE. slope.
- 40.27 The 1/4 sec. cor. of secs. 9 and 10, determined by recor course and distance to bearing tree, and dim stump hole.
- from which
- A pine, 24 ins. diam., bears N. 35° W., 26 lks. dist., mkd. ½ S BT.
- A dim stump hole in drag trail bears N. 30° E., 20 lks. dist.
- At the corner point
- Set an iron post 30 ins. long, 2½ ins. diam., 20 ins. in the ground, in a collar of stone, with brass cap mkd.
- T37S R7W
 ½
 S9 | S10
 1964
- from which
- A pine, 20 ins. diam., bears S. 55° E., 60 lks. dist., mkd. ½ S10 BT.
- Corner falls in bottom small draw, which drains N. 20° E.
-
- N. 0° 19' E., beginning new measurement.
- Desc. 70 ft. over broken canyon bottom.
- 7.00 Wash in bottom of Spring Hollow, drains NE., also loggin road, bears NE. and SW., asc. 155 ft. over SE. slope.

Dependent Resurvey, T. 37 S., R. 7 W.

CHAINS

- 19.00 S. crest of ridge, bears NE. and SW., thence over top of ridge.
- 37.60 N. crest same ridge, bears NW. and S. 10° E., desc. 80 ft. over NE. slope, also dirt road, bears E. and W.
- 40.31 The cor. of secs. 3, 4, 9 and 10, marked by a sandstone 14x14x24 ins., mkd. 5 notches on S. and 3 notches on E. face.
- from which
- A pine, 15 ins. diam., bears N. 16° E., 39 lks. dist., mkd. T37S R7W S3 BT.
- A pine, 15 ins. diam., bears S. 42° W., 230 lks. dist., marks illegible.
- A stump, 24 ins. diam., bears N. 27° W., 64 lks. dist.
- A stump, 24 ins. diam., bears S. 51° E., 37 lks. dist.
- At the corner point.
- Set an iron post 30 ins. long, 2½ ins. diam., 20 ins. in the ground, in a collar of stone, with brass cap mkd.
- T37S R7W
- | | |
|----|-----|
| S4 | S3 |
| S9 | S10 |
- 1964
- from which
- A pine, 18 ins. diam., bears S. 15° E., 31 lks. dist., mkd. T37S R7W S10 BT.
- A pine, 14 ins. diam., bears S. 62½° W., 67 lks. dist., mkd. T37S R7W S9 BT.
- Place original stone W. of corner.
- Cor. falls on S. bank of small wash, which drains S. 80° E.
- Land, broken mountain.
Soil, gravelly.
Timber, pine and some cedar.
-
- From the cor. of secs. 2, 3, 10 and 11.
- N. 89° 41' W., bet. secs. 3 and 10.
- Over broken mountain land, through timber, asc. 90 ft. over E. slope.
- 2.80 High spur, slopes N., desc. 140 ft. over W. slope.
- 9.00 Small hollow, drains N., asc. 60 ft. over NE. slope.

Dependent Resurvey, T. 37 S., R. 7 W.

CHAINS

- 12.30 Small spur, slopes N., desc. 125 ft. over W. slope.
 17.00 Draw, drains N., asc. 70 ft. over E. slope.
 19.97 Point for the E. 1/16 sec. cor. of secs. 3 and 10, at midpoint.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, in a collar of stone, with brass cap mkd.

T37S R7W

E1/16 $\frac{S3}{S10}$

1964

from which

A spruce, 14 ins. diam., bears south, 7 lks. dist., mkd. E1/16 S10 BT.

Asc. 30 ft. over E. slope.

- 22.50 Low spur, slopes N., desc. 30 ft. over W. slope.
 27.50 Hollow, drains N., asc. 200 ft. over E. slope.
 33.70 High spur, slopes N., desc. 115 ft. over W. slope.
 39.94 The 1/4 sec. cor. of secs. 3 and 10, marked by a sandstone 8x14x14 ins., plainly mkd. $\frac{1}{2}$.

from which

A pine, 18 ins. diam., bears S. 37° W., 23 lks. dist., marks grown over, remarked $\frac{1}{2}$ S10 BT.

A pine, 30 ins. diam., bears N. 35° W., 114 lks. dist., mkd. $\frac{1}{2}$ S BT.

At the corner point

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins. in the ground, in a collar of stone, with brass cap mkd.

T37S R7W

$\frac{1}{2}$ $\frac{S3}{S10}$

1964

Place original stone N. of corner.

N. $89^\circ 46'$ W., beginning new measurement.

Desc. 260 ft. over steep W. slope.

- 13.60 Base of steep descent, bears N. and S. also wash, drains N., thence over S. edge small clearing.

Dependent Resurvey, T. 37 S., R. 7 W.

CHAINS	
17.00	Base of low spur, in Spring Hollow, bears S. and N. 4 chs. to end, asc. 50 ft. along N. slope of spur, enter timber.
19.93	Point for the W. 1/16 sec. cor. of secs. 3 and 10, at midpoint. Set an iron post 30 ins. long, 2½ ins. diam., 20 ins. in the ground, in a collar of stone, with brass cap mkd.
	T37S R7W
	W1/16 $\frac{S3}{S10}$ 1964
	from which
	A spruce, 10 ins. diam., bears N. 45° W., 22 lks. dist., mkd. W1/16 S3 BT.
	A spruce, 12 ins. diam., bears S. 43° W., 26 lks. dist., mkd. W1/16 S10 BT.
	Cor. falls on steep N. slope, on top of spur.
	Desc. 25 ft. along N. slope of spur.
23.90	Wash in Spring Hollow, drains NE. also logging road, bears NE. and SW., asc. 135 ft. over SE. slope.
33.70	Gully, drains SE., asc. 80 ft. over E. slope, in small ravine.
39.00	Wash, 4 ft. deep, 30 lks. wide, drains S. 80° E., 1 ch. thence E. irregular.
39.86	The cor. of secs. 3, 4, 9 and 10. Land, broken mountain. Soil, gravelly. Timber, pine, juniper and quaking asp.
	North, bet. secs. 3 and 4.
	Over broken mountain land; through timber.
.50	Wash, 4 ft. deep, 30 lks. wide, drains S. 80° E., asc. 40 ft. over SE. slope.
4.20	S. crest of ridge, bears S. and NE., asc. 40 ft. over gentle S. slope, on top of ridge.
11.40	Bulldozed logging road, bears NE. and SW.
20.06	Point for the S. 1/16 sec. cor. of secs. 3 and 4. Set an iron post 30 ins. long, 2½ ins. diam., 20 ins. in the ground, in a collar of stone, with brass cap mkd.
	T37S R7W S1/16 S4 S3 1964

Dependent Resurvey, T. 37 S., R. 7 W.

CHAINS

from which

A red cedar, 10 ins. diam., bears East, 26 lks. dist., mkd. S1/16 S3 BT.

A pine, 9 ins. diam., bears S. $24\frac{1}{2}^\circ$ W., 18 lks. dist., mkd. S1/16 S4 BT.

Cor. falls on N. crest of ridge, which bears NE. and SW., desc. 255 ft. over steep NW. slope.

40.12 The 1/4 sec. cor. of secs. 3 and 4, marked by a limestone 6x14x14 ins. plainly mkd. $\frac{1}{2}$.

from which

A pine, 32 ins. diam., bears N. 87° E., 24 lks. dist., mkd. $\frac{1}{2}$ S BT.

A pine, 12 ins. diam., bears S. 85° W., 19 lks. dist., mkd. $\frac{1}{2}$ S BT.

At the corner point

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins. in the ground, in a mound of stone 3 ft. base, to top, with brass cap mkd.

T37S R7W

$\frac{1}{2}$
S4 | S3

1964

Place original stone W. of corner.

N. $0^\circ 26'$ W., beginning new measurement.

Desc. 190 ft. over steep NW. slope.

12.00 Base of steep descent, bears E. and W., desc. gentle N. slope in Mammoth Creek Canyon, through willows and grass pasture.

15.80 Mammoth Creek, 1 ft. deep, 20 lks. wide, flows S. 75° E. asc. 10 ft. over grassy S. slope.

19.78 Point for the N. 1/16 sec. cor. of secs. 3 and 4, at proportionate distance.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, in a collar of stone, with brass cap mkd.

T37S R7W

N1/16

S4 | S3

1964

Asc. 55 ft. over gentle S. slope, in Mammoth Creek Canyon.

26.30 Trail road, bears E. and W.

Dependent Resurvey, T. 37 S., R. 7 W.

CHAINS

29.67

Point for the N-N 1/64 sec. cor. of secs. 3 and 4, at proportionate distance.

Set an iron post 30 ins. long, 2½ ins. diam., 15 ins. in the ground, in a collar of stone, with brass cap mkd.

N-N 1/64
S4|S3
1964

Bury black stone 2x5x5 ins., marked X, beside corner.

An X, 4 ins. high, marked on boulder in place, bears N. 40° E., 23 lks. dist.

Asc. gentle S. slope.

32.50

Base of steeper ascent, bears E. and W., asc. 155 ft. over S. slope, leave canyon bottom.

39.10

The closing cor. of secs. 3 and 4, marked by a lava stone 6x16x16 ins., mtd. 3 notches on E. and W. faces, and C C on S. face. This cor. was remtd. AM.

from which

A pine, 20 ins. diam., bears S. 51° E., 108 lks. dist., mtd. T37S R7W S3 BT.

A pine, 14 ins. diam., bears S. 49° W., 160 lks. dist., mtd. T37S R7W S4 BT.

Asc. S. slope.

39.11

Intersect the N. bdy. of the Tp.

Point for the closing cor. of secs. 3 and 4.

Set an iron post 30 ins. long, 2½ ins. diam., 10 ins. in the ground, in a round of stone 6 in. diam., 10 in. top, with brass cap mtd.

T37S R7W
S34
S4,S3
C C
T37S R7W
1964

From this cor., the cor. of secs. 33 and 34, T. 36 S., R. 7 W., bears S. 86° 17' W., 0.82 chs. dist., previously described.

Land, broken mountain.

Soil, gravelly.

Timber, pine, juniper and quaking asp.

Point for the N. 1/4 sec. cor. of sec. 3, on the N. bdy. of the Tp. and midpoint bet. the closing cor. of secs. 2 and 3, and the closing cor. of secs. 3 and 4.

Dependent Resurvey, T. 37 S., R. 7 W.

CHAINS

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, in a collar of stone, with brass cap mkd.

T36S R7W

 $\frac{1}{2}$ S3
 T37S R7W

1964

Set cedar post 5 ins. diam., 5 ft. high, S. of corner.

From this cor., the $\frac{1}{4}$ sec. cor. of sec. 34, T. 36 S., R. 7 W., bears N. $89^{\circ} 36'$ W., 1.96 chs. dist., previously described.

Point for the E. $\frac{1}{16}$ sec. cor. of sec. 3, on the N. bdy. of the Tp. and midpoint bet. the closing cor. of secs. 2 and 3, and the N. $\frac{1}{4}$ sec. cor. of sec. 3.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., in lava bed and in a mound of stone 4 ft. base, to top, with brass cap mkd.

T36S R7W

 E $\frac{1}{16}$ S3

T37S R7W

1964

From this cor., the cor. of secs. 34 and 35, T. 36 S., R. 7 W., bears S. $89^{\circ} 36'$ E., 18.965 chs. dist., previously described.

Point for the W. $\frac{1}{16}$ sec. cor. of sec. 3, on the N. bdy. of the Tp. and midpoint bet. the closing cor. of secs. 3 and 4, and the N. $\frac{1}{4}$ sec. cor. of sec. 3.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 22 ins. in the ground, in a collar of stone, with brass cap mkd.

T36S R7W

 W $\frac{1}{16}$ S3

T37S R7W

1964

from which

A red cedar, 10 ins. diam., bears S. 82° W., 48 lks dist., mkd. W $\frac{1}{16}$ S3 BT.

From this cor., the $\frac{1}{4}$ sec. cor. of sec. 34, T. 36 S., R. 7 W., bears N. $86^{\circ} 17'$ E., 18.06 chs. dist., previously described.

Dependent Resurvey, T. 37 S., R. 7 W.

CHAINS

Reestablishment of the Survey Executed by
Alfred E. Lewis, Deputy Surveyor, in 1897

From the cor. of secs. 15, 16, 21 and 22.

S. 89° 56' W., bet. secs. 16 and 21.

Over mountainous land, through scattered growth of pine
and quaking asp, asc. 110 ft. over gradual E. slope,
over broken lava bed.

38.40 Leave lava bed, enter heavy timber.

40.20 The 1/4 sec. cor. of secs. 16 and 21, marked by a lava
stone 8x10x14 ins., plainly mkd. $\frac{1}{2}$.

from which

A pine, 30 ins. diam., bears N. 42° E., 52 lks.
dist., mkd. $\frac{1}{2}$ S BT.

A pine, 24 ins. diam., bears N. 9 $\frac{1}{2}$ ° E., 177 lks.
dist., mkd. $\frac{1}{2}$ S BT.

At the corner point

Set an iron post 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 15 ins.
in the ground, in a mound of stone 3 ft. base, to top,
with brass cap mkd.

T37S R7W

$\frac{1}{2}$ $\frac{S16}{S21}$

1964

Place original stone N. of corner.

S. 89° 49' W., beginning new measure at.

Asc. 105 ft. over gradual E. slope, through timber.

40.22 The cor. of secs. 16, 17, 20 and 21, marked by a lava
stone 8x8x14 ins., marked with 3 notches on the S. and
4 notches on the E. face.

from which

A pine, 36 ins. diam., bears N. 78° E., 314 lks.
dist., mkd. T37S R7W S16 BT.

A pine, 18 ins. diam., bears S. 62° E., 66 lks.
dist., mkd. T37S R7W S21 BT.

A pine, 15 ins. diam., bears West, 127 lks. dist.,
mkd. T37S R7W S20 BT.

A pine, 18 ins. diam., bears N. 23° W., 54 lks.
dist., mkd. T37S R7W S17 BT.

At the corner point

Dependent Resurvey, T. 37 S., R. 7 W.

CHAINS

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 12 ins. in the ground, in a mound of stone 3 ft. base, to top, with brass cap mkd.

T37S R7W

S17	S16
S20	S21

1964

Place original stone W. of corner.

Land, broken mountain.
Soil, gravelly and lava bed.
Timber, pine, juniper and quaking asp.

N. $0^{\circ} 02'$ W., bet. secs. 16 and 17.

Over mountainous land, through timber, asc. 55 ft. along gradual E. slope, over lava boulders.

36.30 Dirt road, bears E. and curves SW.

39.90 The $\frac{1}{4}$ sec. cor. of secs. 16 and 17, marked by a lava stone $8 \times 10 \times 16$ ins., plainly mkd. $\frac{1}{2}$.

from which

A dead pine, 15 ins. diam., bears N. 33° E., 133 lks. dist., mkd. $\frac{1}{2}$ S BT.

A dead pine, 20 ins. diam., bears N. 38° W., 81 lks. dist. mkd. $\frac{1}{2}$ S BT.

At the corner point

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins. in the ground, in a mound of stone 4 ft. base, to top, with brass cap mkd.

T37S R7W

$\frac{1}{2}$	
S17	S16

1964

from which

A pine, 10 ins. diam., bears N. 74° E., 43 lks. dist., mkd. $\frac{1}{2}$ S16 BT.

A pine, 16 ins. diam., bears N. 68° W., 11 lks. dist., mkd. $\frac{1}{2}$ S17 BT.

Place original stone W. of corner.

N. $0^{\circ} 06'$ W., beginning new measurement.

Desc. 40 ft. along gradual E. slope, over broken lava.

Dependent Resurvey, T. 37 S., R. 7 W.

CHAINS

40.11

The cor. of secs. 8, 9, 16 and 17, marked by a lava stone 8x10x12 ins., plainly mkd. 4 notches on S. and E. faces.

from which

A pine, 24 ins. diam., bears S. 72° E., 62 lks. dist., mkd. T37S R7W S16 BT.

A pine, 24 ins. diam., bears N. 34½° W., 119 lks. dist., mkd. T37S R7W S8 BT.

No positive identification of other original bearing trees.

At the corner point

Set an iron post 30 ins. long, 2½ ins. diam., 6 ins. in the ground, in a mound of stone 4 ft. base, to top, with brass cap mkd.

T37S R7W

S8	S9
S17	S16

1964

from which

A pine, 10 ins. diam., bears N. 41° E., 89 lks. dist., mkd. T37S R7W S9 BT.

A pine, 10 ins. diam., bears S. 39° W., 66 lks. dist., mkd. T37S R7W S17 BT.

Place original stone W. of corner.

Land, broken mountain.

Soil, gravelly with lava boulders.

Timber, pine, juniper and quaking asp.

From the cor. of secs. 9, 10, 15 and 16.

S. 89° 25' W., bet. secs. 9 and 16.

Over broken mountain land, through timber, asc. 80 ft. over SE. slope.

8.30

Dirt road, bears SW. and E., 9 chs. to junction.

34.50

Lava rim, about 20 ft. high, bears N. and S., asc. gentle E. slope, over lava boulders.

41.06

The ¼ sec. cor. of secs. 9 and 16, marked by a lava boulder 8x8x12 ins., plainly mkd. ¼.

from which

A dead fall bears N. 86° E., 52 lks. dist., mkd. ¼ S BT.

Other bearing tree could not be identified.

Dependent Resurvey, T. 17 S., R. 7 W.

CHAINS

At the corner point

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins. in the ground, in a collar of stone, with brass cap mkd.

T37S R7W

$\frac{1}{4}$ S9

S16

1964

from which

A pine, 14 ins. diam., bears S. 45° W., 8 lks. dist., mkd. $\frac{1}{4}$ S16 BT.

A pine, 14 ins. diam., bears N. 50° W., 30 lks. dist., mkd. $\frac{1}{4}$ S9 BT.

Place original stone N. of corner.

S. $89^\circ 51'$ W., beginning new measurement.

Asc. 100 ft. over gradual E. slope.

39.11 The cor. of secs. 8, 9, 16 and 17.

Land, broken mountain.

Soil, gravelly with lava boulders.

Timber, pine and quaking asp.

N. $0^\circ 01'$ W., bet. secs. 8 and 9.

Over mountainous land, through timber, desc. 35 ft. over gradual NE. slope, across lava formation.

42.42 The $\frac{1}{4}$ sec. cor. of secs. 8 and 9, marked by a lava stone $8 \times 12 \times 14$ ins., dimly mkd. $\frac{1}{4}$.

from which

A pine, 30 ins. diam., bears N. 85° E., 137 lks. dist., marks not legible, remarked $\frac{1}{4}$ S9 BT.

A pine, 30 ins. diam., bears S. 60° W., 32 lks. dist., marks not legible, remarked $\frac{1}{4}$ S8 BT.

At the corner point

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground, in a collar of stone, with brass cap mkd.

T37S R7W

$\frac{1}{4}$

S8 | S9

1964

Place original stone W. of corner.

Dependent Resurvey, T. 17 S., R. 7 W.

CHAINS

N. 0° 05' E., beginning new measurement.

Asc. 25 ft. over SE. slope.

13.90 Crest of steep descent, bears NW. and SE., desc. 200 ft. over NE. slope, through dense timber.

28.50 Small ravine, drains NE., asc. 70 ft. over SE. slope.

38.00 Logging road, bears N. 10° E. and S. 10° W., on top of high ridge, which bears NE. and S.

38.80 The cor. of secs. 4, 5, 8 and 9, marked by a limestone 6x6x18 ins., plainly mkd. 5 notches on S. and 4 notches on E. face.

from which

A pine stump, 30 ins. diam., bears N. 76½° E., 68 lks. dist.

A pine, 20 ins. diam., bears S. 23° E., 70 lks. dist., BT legible.

A pine, 24 ins. diam., bears S. 50° W., 135 lks. dist., dimly mkd.

A pine, 20 ins. diam., bears N. 88° W., 90 lks. dist., mkd. T37S R7W S5 BT.

At the corner point

Set an iron post 30 ins. long, 2½ ins. diam., 24 ins. in the ground, in a collar of stone, with brass cap mkd.

T37S R7W

S5	S4
S8	S9

1964

from which

A pine, 8 ins. diam., bears N. 33° E., 55 lks. dist., mkd. T37S R7W S4 BT.

A pine, 15 ins. diam., bears S. 88½° E., 44 lks. dist., mkd. T37S R7W S9 BT.

A pine, 7 ins. diam., bears S. 56° W., 22 lks. dist., mkd. T37S R7W S8 BT.

A pine, 20 ins. diam., bears N. 17½° W., 66 lks. dist., mkd. T37S R7W S5 BT.

Place original stone W. of corner.

Cor. falls on W. side of logging road, on top of ridge.

Land, broken mountain.

Timber, pine, juniper and quaking asp.

Soil, gravelly with lava boulders.

Dependent Resurvey, T. 37 S., R. 7 W.

CHAINS

Reestablishment of the Survey Executed by
Robert E. Lee Collier, Deputy Surveyor, in 1895

From the cor. of secs. 3, 4, 9 and 10.

N. 89° 52' W., bet. secs. 4 and 9.

Over mountainous land, through heavy timber, asc. 60 ft. over NE. slope.

- 5.80 E. crest of ridge, bears NE. and S. irregular, also logging road, bears N. and S., thence over top of ridge.
- 12.00 W. crest same ridge, bears N. and S. irregular, desc. 200 ft. over W. slope.
- 24.30 Gravel road in bottom of ravine, bears N. and S., asc. 230 ft. over E. slope.
- 35.10 High spur, slopes N., desc. 30 ft. over W. slope into small cove.
- 40.03 The 1/4 sec. cor. of secs. 4 and 9, marked by a limestone 6x8x14 ins., plainly mkd. 1/4.

from which

A pine, 20 ins. diam., bears N. 31 1/2° E., 44 lks. dist., mkd. 1/4 S BT.

A pine stump 24 ins. diam., bears S. 15° E., 60 lks. dist.

At the corner point

Set an iron post 30 ins. long, 2 1/2 ins. diam., 18 ins. in the ground, in a collar of stone, with brass cap mkd.

T37S R7W

1/4 $\frac{S4}{S9}$

1964

from which

A pine, 14 ins. diam., bears S. 28 1/2° W., 27 lks. dist., mkd. 1/4 S9 BT.

Place original stone N. of corner.

S. 89° 52' W., beginning new measurement.

Asc. 60 ft. over NE. slope.

- 7.00 Spur, slopes N., desc. 170 ft. over W. slope.
- 20.00 Ravine, drains NE., asc. 320 ft. over steep E. slope.

Dependent Resurvey, T. 37 S., R. 7 W.

CHAINS	
37.50	E. crest of ridge, bears NE. and S. irregular, thence over top of ridge.
38.80	Logging road, bears N. 10° E. and S. 10° W.
39.97	The cor. of secs. 4, 5, 8 and 9. Land, broken mountain. Soil, gravelly. Timber, pine, juniper and quaking asp.
19.73	N. 0° 11' W., bet. secs. 4 and 5. Over mountainous land, through timber, desc. 140 ft. along W. slope of spur. Point for the S. 1/16 sec. cor. of secs. 4 and 5, at midpoint. Set an iron post 30 ins. long, 2½ ins. diam., 20 ins. in the ground, in a collar of stone, with brass cap mkd.
	T37S R7W S1/16 S5 S4 1964
	Desc. 200 ft. over steep NW. slope.
32.60	Base of steep descent, in canyon bottom, bears NE. and SW., desc. 40 ft. over gentle NW. slope.
35.10	Tommy Creek, 1 ft. deep, 10 lks. wide, flows NE., asc. 15 ft. over small flat, scattered timber.
39.46	The ½ sec. cor. of secs. 4 and 5, marked by an iron post 2½ ins. diam., set, mkd. and witnessed as described in the official record of remonumentations, in 1961.
	N. 0° 18' W., beginning new measurement.
	Over small flat in canyon bottom.
1.00	Base of lava spur, bears NE. and SW., asc. 45 ft. over steep SE. slope, over lava boulders.
3.50	S. crest same lava spur, bears NE. and SW., desc. 30 ft. over top of lava spur.
13.00	Unimproved road, bears E. and W. irregular.
14.30	N. crest same lava spur, desc. 35 ft. over N. slope.
16.40	Base same lava spur, thence over creek bottom.
19.80	Mammoth Creek, 1 ft. deep, 25 lks. wide, flows E., asc. S. slope.

Dependent Resurvey, T. 37 S., R. 7 W.

- 11.16 Point for the N. 1/16 sec. cor. of secs. 4 and 5, at proportionate distance.

Set as iron post 30 ins. long, 2½ ins. diam., 24 ins. in the ground, in a collar of stone, with brass cap mkd.

T37S R7W

N1/16

S5/4

1964

Asc. 20 ft. over S. slope.

- 11.20 Gravel road, hatch to Panguich Lake, bears E. and W., asc. 240 ft. over SW. slope, along E. side of draw. Leave creek bottom.

- 11.24 The closing cor. of secs. 4 and 5, on the N. bdv. of the T., marked by an iron post 2½ ins. diam., set, mkd. and witnessed as described in the official record of re-mentations, in 1961.

From this closing cor., the cor. of secs. 32 and 33, T. 36 S., R. 7 W., bears S. 89° 46' E., 0.73 chs. dist., previously described.

Land, broken mountain.

Soil, gravelly.

Timber, pine, juniper and quaking asp.

Point for the N. 1/4 sec. cor. of sec. 4, on the N. bdv. of the T., and midpoint bet. the closing cor. of secs. 3 and 4, and the closing cor. of secs. 4 and 5.

Set an iron post 30 ins. long, 2½ ins. diam., 18 ins. in the ground, in a collar of stone, with brass cap mkd.

T36S R7W

1/4 S4

T37S R7W

1964

From this cor., the 1/4 sec. cor. of sec. 33, T. 36 S., R. 7 W., bears S. 89° 33' E., 0.15 chs. dist., previously described.

Re-establishment of the Survey Executed by
Alfred B. Lewis, Deputy Surveyor, in 1897

From the cor. of secs. 16, 17, 20 and 21.

N. 50° 51' W., bet. secs. 17 and 20.

Over broken mountain land, through timber, asc. 145 ft. over gradual E. slope, over lava boulders.

- 11.28 Enter very loose lava bed.

Dependent Resurvey, T. 37 S., R. 7 W.

CHAINS

40.16 The 1/4 sec. cor. of secs. 17 and 20, marked by a lava stone 10x10x12 ins., plainly mkd. $\frac{1}{4}$.

from which

A spruce, 20 ins. diam., bears S. $54\frac{1}{2}^{\circ}$ W., 33 lks. dist., mkd. $\frac{1}{4}$ S BT.

At the corner point

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins. in the ground, in a mound of stone 3 ft. base, to top, with brass cap mkd.

T37S R7W

$\frac{1}{4}$ $\frac{S17}{S20}$

1964

from which

A spruce, 8 ins. diam., bears N. 48° W., 105 lks. dist., mkd. $\frac{1}{4}$ S17 BT.

Place original stone N. of corner.

S. $89^{\circ} 46'$ W., beginning new measurement.

Asc. 85 ft. over gradual E. slope, over lava bed.

27.00 Base of lava terrace, bears N. and S.; asc. 35 ft. over terrace.

29.00 Crest of same terrace; asc. 15 ft. over SE. slope of bench.

40.14 The cor. of secs. 17, 18, 19 and 20, marked by a lava stone 10x12x14 ins., mkd. 3 notches on S. and 5 notches on E. face.

from which

A spruce, 16 ins. diam., bears S. $67\frac{1}{2}^{\circ}$ E., 106 lks., mkd. T37S R7W S20 BT.

At the corner point

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 12 ins. in the ground, in a mound of stone, with brass cap mkd.

T37S R7W

$\frac{S18}{S19}$ $\frac{S17}{S20}$

1964

from which

A pine, 24 ins. diam., bears N. $70\frac{1}{2}^{\circ}$ E., 72 lks. dist., mkd. T37S R7W S17 BT.

Dependent Resurvey, T. 37 S., R. 7 W.

CHAINS

A pine, 34 ins. diam., bears S. 26° W., 168 lks. dist., mkd. T37S R7W S19 BT.

A pine, 30 ins. diam., bears N. $78\frac{1}{2}^{\circ}$ W., 45 lks. dist., mkd. T37S R7W S18 BT.

Place original stone W. of corner.

Land, broken.

Soil, gravelly with lava boulders.

Timber, pine, juniper and quaking asp.

N. $89^{\circ} 47'$ W., bet. secs. 18 and 19.

Over broken mountain land, through timber; asc. 35 ft. along S. slope.

17.70 Slope changes; desc. 35 ft. over gradual W. slope, over lava.

40.13 The $\frac{1}{4}$ sec. cor. of secs. 18 and 19, marked by a lava stone $10 \times 10 \times 12$ ins., dimly mkd. $\frac{1}{2}$.

At the corner point

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 12 ins. in the ground, in a mound of stone 3 ft. base, to top, with brass cap mkd.

T37S R7W

$\frac{1}{2}$ $\frac{S18}{S19}$

1964

from which

A spruce, 18 ins. diam., bears N. $20\frac{1}{2}^{\circ}$ E., 36 lks. dist., mkd. $\frac{1}{2}$ S18 BT.

A spruce, 12 ins. diam., bears S. $66\frac{1}{2}^{\circ}$ W., 102 lks. dist., mkd. $\frac{1}{2}$ S19 BT.

Place original stone N. of corner.

N. $89^{\circ} 39'$ W., beginning new measurement.

Desc. 50 ft. over gradual W. slope, through scattered spruce and quaking asp, over lava formation.

29.96 The cor. of secs. 18 and 19, on the W. bdy. of the Tp. marked by an iron post 2 ins. diam., set, mkd. and witnessed as described in the resurvey of the W. bdy. in 1941.

Dependent Resurvey, T. 37 S., R. 7 W.

CHAINS

Land, broken mountain.
Soil, gravelly with lava rocks.
Timber, pine, juniper and quaking asp.

From the cor. of secs. 17, 18, 19 and 20.

N. 0° 18' E., bet. secs. 17 and 18.

Over broken mountain land, through timber; asc. 70 ft. over SW. slope.

.90 End of dirt road from E.

9.60 Slope changes; asc. 270 ft. along W. slope of Henrie Knoll.

27.20 Top of ascent on W. slope; desc. 180 ft. along W. slope.

40.00 The 1/4 sec. cor. of secs. 17 and 18, marked by a lava stone 6x14x18 ins., plainly mkd. 1/2. Bearing trees fit calls of original notes, but are now dead.

At the corner point

Set an iron post 30 ins. long, 2 1/2 ins. diam., 18 ins. in the ground, in a collar of stone, with brass cap mkd.

T37S R7W

1/2
S18 | S17

1964

from which

U.S.G.S. Triangulation Station "Henrie" Latitude 37° 35' 28.14" N., Longitude 112° 39' 54.81" W., bears S. 31° 58' E., 17.36 chs. dist.

A spruce, 16 ins. diam., bears N. 48° W., 21 lks. dist., mkd. 1/2 S18 BT.

A spruce, 18 ins. diam., bears N. 60° E., 21 lks. dist., mkd. 1/4 S17 BT.

Place original stone W. of corner.

N. 1° 26' E., beginning new measurement

Desc. 70 ft. along W. slope of Henrie Knoll.

7.50 Slope changes; desc. 245 ft. over N. slope, over very broken lava.

Dependent Resurvey, T. 37 S., R. 7 W.

CHAINS

- 40.19 The cor. of secs. 7, 8, 17 and 18, marked by a lava stone 5x10x14 ins., plainly mkd. 4 notches on S. and 5 notches on E. face. Bearing trees fit calls of original notes, but are now dead.

At the corner point

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 12 ins. in the ground, in a mound of stone, with brass cap mkd.

T37S R7W

S7	S8
S18	S17

1964

from which

A spruce, 10 ins. diam., bears S. 49° W., 46 lks. dist., mkd. T37S R7W S18 BT.

A spruce, 10 ins. diam., bears N. 50° W., 77 lks. dist., mkd. T37S R7W S7 BT.

No other suitable bearing trees.

Place original stone W. of corner.

Land, broken mountain.

Soil, gravelly and lava bed.

Timber, pine, juniper and quaking asp.

From the cor. of secs. 8, 9, 16 and 17.

N. $89^\circ 55'$ W., bet. secs. 8 and 17.

Over broken mountain land, through timber; asc. 275 ft. over broken NE. slope, over lava formation.

- 35.10 Low spur, slopes N.; desc. 20 ft. over broken NW. slope.

- 38.86 The $\frac{1}{4}$ sec. cor. of secs. 8 and 17, marked by a lava stone 10x12x16 ins., plainly mkd. $\frac{1}{4}$.

from which

A pine, 16 ins. diam., bears S. $45\frac{1}{2}^\circ$ W., 20 lks. dist., marks illegible, remarked $\frac{1}{4}$ S17 BT. No evidence other bearing tree.

At the corner point

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 16 ins. in the ground, in a collar of stone, with brass cap mkd.

T37S R7W

$\frac{1}{4}$	S8
	S17

1964

Dependent Resurvey, T. 37 S., R. 7 W.

CHAINS

from which

A pine, 6 ins. diam., bears N. $40\frac{1}{2}^{\circ}$ W., 26 lks.
dist., mkd. $\frac{1}{2}$ S8 BT.

Place original stone N. of corner.

S. $89^{\circ} 59'$ W., beginning new measurement.

Desc. 50 ft. over NW. slope.

11.50 Swale, drains N., asc. 40 ft. along broken N. slope,
over lava.

29.50 Lava rise, bears N. and S., desc. 15 ft. along N. slope,
over lava.

40.19 The cor. of secs. 7, 8, 17 and 18.

Land, broken.
Soil, gravelly and mostly lava bed.
Timber, pine and quaking asp.

N. $89^{\circ} 42'$ W., bet. secs. 7 and 18.

Over broken mountain land, through scattered timber,
desc. 20 ft. along broken N. slope, over lava formation.

22.50 Crest of steep descent, bears SW. and curves NE., desc.
150 ft. over steep NW. slope, through dense timber.

37.00 Tommy Creek, drains NE., asc. 50 ft. over steep SE.
slope.

40.12 The $\frac{1}{4}$ sec. cor. of secs. 7 and 18, marked by a sand-
stone $7 \times 12 \times 14$ ins., plainly mkd. $\frac{1}{2}$.

from which

A spruce, 18 ins. diam., bears S. $30\frac{1}{2}^{\circ}$ E., 22 lks.
dist., mkd. $\frac{1}{2}$ S BT.

A spruce, 20 ins. diam., bears N. $25\frac{1}{2}^{\circ}$ W., 10 lks.
dist., mkd. $\frac{1}{2}$ S BT.

At the corner point

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins.
in the ground, in a collar of stone, with brass cap mkd.

T37S R7W

$\frac{1}{2}$ $\frac{S7}{S18}$

1964

Place original stone N. of corner.

S. $89^{\circ} 35'$ W., beginning new measurement.

Asc. 150 ft. over SE. slope, through timber.

Dependent Resurvey, T. 37 S., R. 7 W.

CHAINS

- 5.50 Spur, slopes NE., desc. 60 ft. along N. slope.
- 19.20 Small draw, drains NE., asc. 300 ft. over steep E. slope
- 29.42 The cor. of secs. 7 and 18, on the W. bdy. of the Tp., marked by an iron post, 2 ins. diam., set, mkd. and witnessed as described in the official record of the resurvey of the W. bdy., in 1941.
- Land, broken mountain.
Soil, gravelly with lava formation on E. portion.
Timber, pine, juniper and quaking asp.
- From the cor. of secs. 7, 8, 17 and 18.
- N. 0° 09' W., bet. secs. 7 and 8.
- Over mountainous land, through timber, desc. 285 ft. over broken N. slope, across lava formation.
- 30.30 Tommy Creek, 3 ft. deep, 20 lks. wide, drains N. 20° E., dry at time of survey, thence along W. side of creek.
- 33.00 Leave W. side creek, desc. 20 ft. along gentle E. slope, through dense timber.
- 39.91 The 1/4 sec. cor. of secs. 7 and 8, marked by a lava stone 5x10x16 ins., dimly mkd. 1/2.
- from which
- A pine, 30 ins. diam., bears N. 45 1/2° E., 87 lks. dist., mkd. 1/2 S BT.
- A pine, 30 ins. diam., bears S. 38 1/2° E., 107 lks. dist., mkd. 1/2 S BT.
- At the corner point
- Set an iron post 30 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, in a collar of stone, with brass cap mkd.
- T37S R7W
1/2
S7 | S8
1964
- Place original stone W. of corner.
-
- N. 0° 35' W., beginning new measurement.
- Desc. 130 ft. over gradual NE. slope, through dense timber.
- 9.43 Old log fence, bears NW. and SE., about 10 chs. each direction to end.
- 20.75 Point for the N. 1/16 sec. cor. of secs. 7 and 8, at midpoint.
- Set an iron post 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, in a collar of stone, with brass cap mkd.

Dependent Resurvey, T. 37 S., R. 7 W.

CHAINS

T37S R7W

N1/16

S7|S8

1964

from which

A pine, 24 ins. diam., bears N. $79\frac{1}{2}^{\circ}$ E., 29 lks. dist., mkd. N1/16 S8 BT.

A pine, 8 ins. diam., bears S. $21\frac{1}{2}^{\circ}$ W., 16 lks. dist., mkd. N1/16 S7 BT.

Desc. 75 ft. over gentle N. slope, through dense timber.

34.40 Dirt road, bears E. and W. irregular.

35.50 Wash, 3 ft. deep, 10 lks. wide, drains E., asc. 60 ft. over S. slope, in small hollow, draining S.

41.50 The cor. of secs. 5, 6, 7 and 8, marked by a limestone $4 \times 12 \times 14$ ins., firmly set and plainly mkd. 5 notches on S. and E. faces.

from which

A pine, 30 ins. diam., bears S. 10° E., 118 lks. dist., mkd. T37S R7W S8 BT. No other positive bearing trees.

At the corner point

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 22 ins. in the ground, in a collar of stone, with brass cap mkd.

T37S R7W

S6|S5

S7|S8

1964

from which

A pine, 8 ins. diam., bears N. $78\frac{1}{2}^{\circ}$ E., 84 lks. dist., mkd. T37S R7W S5 BT.

A pine, 6 ins. diam., bears S. $81\frac{1}{2}^{\circ}$ W., 48 lks. dist., mkd. T37S R7W S7 BT.

A pine, 6 ins. diam., bears N. 68° W., 15 lks. dist., mkd. T37S R7W S6 BT.

Place original stone W. of corner.

Land, broken mountain.

Soil, gravelly N. portion, lava formation S. portion.

Timber, pine, juniper and quaking asp.

From the cor. of secs. 4, 5, 8 and 9.

S. $89^{\circ} 54'$ W., bet. secs. 5 and 8.

De endent Resurve

CHAINS

- Over mountainous land, through timber, desc. 20 ft. over NW. slope.
- 4.30 Swale, drains N., asc. 35 ft. over NE. slope.
- 9.90 Spur, slopes N., desc. 190 ft. over steep NW. slope.
- 19.98 Point for the E. 1/16 sec. cor. of secs. 5 and 8, at midpoint.
- Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins. in the ground, in a collar of stone, with brass cap mkd.

T37S R7W

E1/16 $\frac{S5}{S8}$

1964

from which

A pine, 24 ins. diam., bears S. 47° W., 46 lks. dist., mkd. E1/16 S8 BT.

A pine, 18 ins. diam., bears N. $11\frac{1}{2}^\circ$ W., 36 lks. dist., mkd. E1/16 S5 BT.

Desc. 50 ft. over NW. slope.

- 21.00 Wash in draw, drains NW., asc. 60 ft. over NE. slope.
- 26.50 Spur, slopes NW., desc. 60 ft. over NW. slope.
- 32.50 Base same spur, bears NE. and SW., desc. 10 ft. along N. slope, in canyon bottom.
- 39.96 The 1/4 sec. cor. of secs. 5 and 8, marked by a lava stone 6x8x15 ins., plainly mkd. $\frac{1}{2}$.

from which

A pine, 20 ins. diam., bears N. $43\frac{1}{2}^\circ$ E., 36 lks. dist., marks illegible, remarked $\frac{1}{2}$ S5 BT.

A deadfall bears S. 50° W., 90 lks. dist., mks. illegible.

At the corner point

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground, in a collar of stone, with brass cap mkd.

T37S R7W

 $\frac{1}{2}$ $\frac{S5}{S8}$

1964

from which

A pine, 15 ins. diam., bears S. 65° E., 54 lks. dist., mkd. $\frac{1}{2}$ S8 BT.

Place original stone N. of corner.

Dependent Resurvey, T. 17 S., R. 7 W.

CHAINS

N. 89° 45' W., beginning new measurement.

Continue along N. slope in canyon.

- 6.80 Tommy Creek, dry, 3 ft. deep, 20 lks. wide, drains NE.; asc. 30 ft. over E. slope.
- 13.50 Road, bears NE. and SW., about 5 chs.; thence W.; asc. 140 ft. along S. slope.
- 19.73 Point for the W. 1/16 sec. cor. of secs. 5 and 8, at midpoint.

Set an iron post 30 ins. long, 2½ ins. diam., 24 ins. in the ground, in a collar of stone, with brass cap mkd.

T37S R7W

W1/16 $\frac{S5}{S8}$

from which

A pine, 10 ins. diam., bears N. 42½° E., 36 lks. dist., mkd. W1/16 S5 BT.

A pine, 14 ins. diam., bears S. 50½° E., 47 lks. dist., mkd. W1/16 S8 BT.

Asc. 120 ft. along S. slope.

- 30.10 Spur, slopes S.; desc. 140 ft. over SW. slope.
- 39.46 The cor. of secs. 5, 6, 7 and 8.

Land, broken mountain.

Soil, gravelly.

Timber, pine, juniper and quaking asp.

S. 89° 48' W., bet. secs. 6 and 7.

Over mountainous land, through timber; asc. 120 ft. over SE. slope.

- 5.40 Spur, slopes S.; desc. 70 ft. over SW. slope.
- 10.60 Small draw, drains S.; desc. 80 ft. along S. slope.
- 13.70 Small spur, slopes S.; desc. 40 ft. over SW. slope.
- 21.10 Dirt road, in a draw draining SE., bears NW. and SE.; asc. 250 ft. over SE. slope.
- 35.30 Slope changes; desc. 25 ft. along S. slope.
- 40.04 The 1/4 sec. cor. of secs. 6 and 7, marked by a sandstone 10x14x18 ins., mkd. ¼. Decayed dead falls fit calls of original bearing trees, no legible mks.

At the corner point

De endent Resurve , T. 37 S. R. 7 W.

CHAINS

Set an iron post 30 ins. long, 2½ ins. diam., 16 ins. in the ground, in a collar of stone, with brass cap mkd.

T37S R7W

½ $\frac{S6}{S7}$

1964

from which

A pine, 10 ins. diam., bears N. 1° E., 55 lks. dist., mkd. ½ S6 BT.

A pine, 6 ins. diam., bears S. 15° E., 28 lks. dist., mkd. ½ S7 BT.

Place original stone N. of corner.

S. 89° 40' W., beginning new measurement.

Desc. 30 ft. along S. slope.

10.50 Draw, drains SE.; asc. 400 ft. over ledgy and irregular E. slope.

27.00 Crest of steep ascent, bears NW. and S. irregular; asc. gentle E. slope of bench, through timber.

29.51 The cor. of secs. 6 and 7, on the W. bdy. of the Tp., marked by an iron post 2½ ins. diam., set, mkd. and witnessed as described in the official record of the resurvey of the W. bdy., in 1941.

Land, broken mountain.

Soil, gravelly.

Timber, pine, juniper and quaking asp.

From the cor. of secs. 5, 6, 7 and 8.

N. 0° 18' W., bet. secs. 5 and 6.

Over mountainous land, through timber; asc. 200 ft. over irregular S. slope, in hollow.

13.70 Ridge, bears E. and W.; desc. 75 ft. over N. slope.

19.99 Point for the S. 1/16 sec. cor. of secs. 5 and 6, at midpoint.

Set an iron post 30 ins. long, 2½ ins. diam., 18 ins. in the ground, in a collar of stone, with brass cap mkd.

T37S R7W

S1/16

S6 | S5

1964

from which

Dependent Resurvey, T. 37 S., R. 7 W.

CHAINS

A pine, 16 ins. diam., bears N. $5\frac{1}{2}^{\circ}$ E., 22 lks. dist., mkd. S1/16 S5 BT.

A pine, 24 ins. diam., bears S. $6\frac{1}{2}^{\circ}$ W., 25 lks. dist., mkd. S1/16 S6 BT.

Desc. 20 ft. over N. slope.

22.80 Wash in bottom of ravine, drains E., asc. 85 ft. over SE. slope.

30.20 Ridge, bears E. and W., desc. 150 ft. over NE. slope.

39.98 The $\frac{1}{4}$ sec. cor. of secs. 5 and 6, marked by a lava stone 4x12x18 ins., plainly mkd. $\frac{1}{2}$.

from which

A pine, 14 ins. diam., bears N. $61\frac{1}{2}^{\circ}$ E., 26 lks. dist., mkd. $\frac{1}{2}$ S BT.

A spruce, 24 ins. diam., bears N. $4\frac{1}{2}^{\circ}$ W., 30 lks. dist., mkd. $\frac{1}{2}$ S BT.

At the corner point

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground, in a collar of stone, with brass cap mkd.

T37S R7W

$\frac{1}{2}$
S6 | S5

1964

Place original stone W. of corner.

N. $0^{\circ} 30'$ W., beginning new measurement.

Desc. 15 ft. over NE. slope.

2.00 Wash in ravine, drains E., asc. 130 ft. over SE. slope.

17.00 Ridge, bears E. and W., desc. 50 ft. over NE. slope.

20.04 Point for the N. $\frac{1}{16}$ sec. cor. of secs. 5 and 6, at proportionate distance.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground, in a mound of stone 3 ft. base, to top, with brass cap mkd.

T37S R7W

N1/16

S6 | S5

1964

No suitable bearing trees.

Desc. 255 ft. over steep N. slope.

Dependent Resurvey, T. 37 S., R. 7 W.

CHAINS

33.10 Wash in small ravine, drains NE., also base of steep descent, asc. 30 ft. along gentle E. slope, in Mammoth Creek Canyon.

40.15 The cor. of secs. 5, 6, 31 and 32, on the N. bdy. of the Tp., an iron post $2\frac{1}{2}$ ins. diam., previously described.

Land mountainous.

Soil, gravelly.

Timber, pine, juniper and quaking asp.

Point for the E. $\frac{1}{16}$ sec. cor. of sec. 5, on the N. bdy. of the Tp. and midpoint bet. the closing cor. of secs. 4 and 5, and the $\frac{1}{2}$ sec. cor. of secs. 5 and 32.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground, in a collar of stone, with brass cap mkd.

T36 S R7W

E1/16 S5

T37S R7W

1964

from which

A pine, 14 ins. diam., bears S. $18\frac{1}{2}^{\circ}$ E., 73 lks. dist., mkd. E1/16 S5 BT.

A pine, 8 ins. diam., bears S. 27° W., 75 lks. dist., mkd. E1/16 S5 BT.

From this cor., the closing cor. of secs. 4 and 5, bears S. $89^{\circ} 46'$ E., 19.925 chs. dist., previously described.

From this same cor., the $\frac{1}{4}$ sec. cor. of secs. 5 and 32, bears N. $89^{\circ} 46'$ W., 19.925 chs. dist., previously described.

Point for the N. $\frac{1}{16}$ sec. cor. of sec. 6, on the W. bdy. of the Tp. and at proportionate distance bet. the W. $\frac{1}{4}$ sec. cor. of sec. 6, and the closing cor. of T. 37 S., Rs. 7 and 8 W.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, in a collar of stone, with brass cap mkd.

T37S

R8W | R7W

| N1/16

| S6

1964

from which

A pine, 14 ins. diam., bears N. 45° E., 151 lks. dist., mkd. N1/16 S6 BT.

Dependent Resurvey, T. 37 S., R. 7 W.

CHAINS

From this cor., the W. $\frac{1}{4}$ sec. cor. of sec. 6, bears S. $0^{\circ} 11'$ E., 20.80 chs. dist., marked by an iron post 1 in. diam., set, mkd. and witnessed as described in the official record of the resurvey of the W. bdy., in 1940.

From this same cor., the closing cor. of T. 37 S., Rs. 7 and 8 W., bears N. $0^{\circ} 11'$ W., 26.98 chs. dist., previously described.

General Description

The portion of T. 37 S., R. 7 W. covered by this survey consists of mountain land within the Dixie National Forest, located about 6 miles south of Panguitch Lake.

With the exception of a few barren patches of lava bed, and pasture land along Mammoth Creek the township is covered with a dense growth of pine, scattered juniper and groves of quaking asp on higher elevations.

Main access to the township is by a gravel road, which enters the township on the E. bdy. of sec. 13, bearing generally SW. through the township. A branch leaves this road in sec. 23, bears NW., irregular, leaving the township on the N. bdy. of sec. 5. There is numerous other unimproved branches of road, which have been built mainly for logging work.

The main source of water is Mammoth Creek, which enters the township on the N. bdy. of sec. 5, flows eastward, leaving the township on the E. bdy. of sec. 1.

Habitation consists of numerous summer homes along Mammoth Creek, in secs. 1, 4 and 5.

The elevation varies from about 7600 to 9250 feet above sea level.

CHAINS

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS

NAMES	CAPACITY
LaVern Griffin	Surveying Aid
Merlin J. Robinson	Surveying Aid
Morris E. Blackburn	Surveying Aid
Randy Robinson	Surveying Aid
Lee Christensen	Surveying Aid
Calvin M. Gleave	Surveying Aid

CERTIFICATE OF SURVEY

I, Craig P. Sylvester, HEREBY CERTIFY upon honor that,
 in pursuance of special instructions bearing date of the 25th day of February, 1964,
 I have surveyed a portion of the East Boundary, the North Boundary, and a
 portion of the Subdivision of Township 37 South, Range 7 West

of the Salt Lake Meridian, in the State of Utah, which
 are represented in the foregoing field notes as having been executed by me and under my direction;
 and that said survey has been made in strict conformity with said special instructions, the Manual
 of Instructions for the Survey of the Public Lands of the United States, and in specific manner
 described in the foregoing field notes.

January 19, 1967
 (Date)

Craig P. Sylvester
 (Cadastral Surveyor)
 SUPERVISORY

 (Date)

 (Cadastral Surveyor)

CERTIFICATE OF APPROVAL

SUBMITTED FOR APPROVAL
 Date NOV 27 1967

BUREAU OF LAND MANAGEMENT,
 Washington, D. C.

The foregoing field notes of the survey of the East Boundary, the North Boundary,
 and a portion of the Subdivision of Township 37 South, Range 7 West, Salt
 Lake Meridian, Utah

executed by Craig P. Sylvester, Supervisory Cadastral Surveyor
 having been critically examined and found correct, are hereby approved.

 (Date)

[Signature]
 (Chief, Division of Engineering)

CERTIFICATE OF TRANSCRIPT

, is a true copy of the original field notes.


 Date

Blank

Page

11 11 2 30 9

11 11 2 30 9

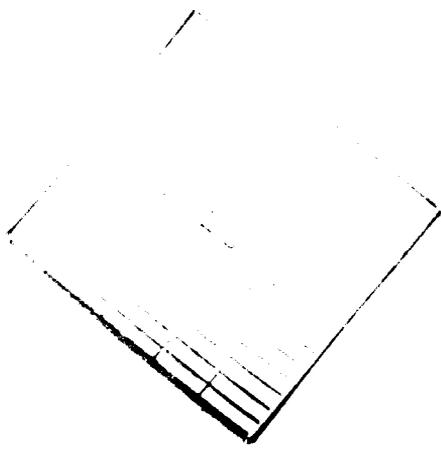

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
Original

283

FIELD NOTES

OF THE SURVEY OF

A PORTION OF THE SUBDIVISIONAL LINES

COMPLETING THE SUBDIVISION OF

TOWNSHIP 41 SOUTH, RANGE 4 EAST

RECEIVED
BUREAU OF LAND MANAGEMENT
MAY 11 4 53 PM '65

Of the SALT LAKE Meridian,

In the State of UTAH

EXECUTED BY


CRAIG P. SYLVESTER SUPERVISORY CADASTRAL SURVEYOR

Under special instructions dated APRIL 30, 19 65, which provided for the surveys
included under Group Number 481, approved MAY 4, 1965,
and assignment instructions dated MAY 7, 19 65.

Survey commenced JULY 9, 19 65

Survey completed AUGUST 18, 19 65

PLATE 1

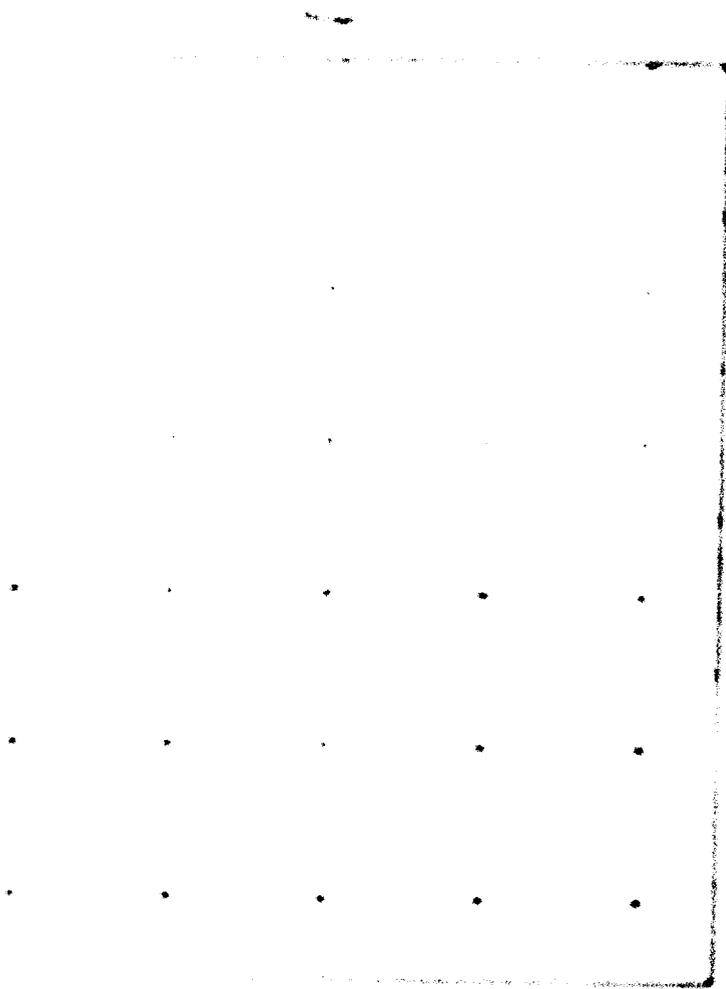

Portion of the Subdivision of T. 41 S., R. 4 E.

CHAINS

The south boundary was surveyed by Andrew Nelson and Elliot Bird in 1934. The north (Eighth Standard Parallel South), east and west boundaries and a portion of the subdivisional lines were surveyed by Vern E. Lane, in 1958.

The following field notes are those of a survey of the remaining subdivisional lines of T. 41 S., R. 4 E.

The survey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1947, and the Special Instructions dated April 30, 1965.

Corners on the east-west lines were set on the true latitudinal curve. Lines connecting previously established corners were run by random and true method, but for simplification of the record, the random lines are omitted from these field notes.

All lines of this survey were run by direct method where lines were accessible; lines inaccessible were run by traverse or triangulation method. Distances to topography on lines run by traverse and triangulation methods are approximately as scaled from U.S.G.S. topographic sheets. The details of such traverses and triangulations have been thoroughly checked and verified, and in order to simplify the records, the diagrams and reductions are omitted from these field notes.

The direction of the lines of this survey were determined by reference to true meridians established on line by altitude observations on the sun. The lines were carried forward by sustained angulation being supplemented by other numerous altitude observations on the sun taken throughout the progress of the survey.

The geographic position for the southeast corner of the township is in Latitude $37^{\circ} 11' 37.0''$ N. and Longitude $111^{\circ} 24' 58.2''$ W., as furnished with the data in the special instructions.

The magnetic declination was read at a number of stations throughout the township and the average of the several readings was found to be $15^{\circ} 15'$ E.

Beginning at the cor. of secs. 25, 26, 35 and 36, marked by an iron post, $2\frac{1}{2}$ ins. diam., set, mkd. and witnessed as described in the survey of a portion of the subdivision, in 1958.

N. $0^{\circ} 01'$ W., bet. secs. 25 and 26.

Over broken land on E. breaks of Smoky Mtn., asc. 105 ft. over ledgy SE. slope.

6.70 Ridge, bears NE. and SW., desc. 515 ft. over ledgy NW. slope.

32.70 Canyon, drains E., asc. 80 ft. over ledgy S. slope.

40.00 Point for the $1/4$ sec. cor. of secs. 25 and 26.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.

Portion of the Subdivision of T. 41 S., R. 4 E.

CHAINS

T41S R4E

$$\frac{1}{2} \begin{array}{|l} S26 \\ S25 \end{array}$$

1965

Asc. 560 ft. over ledgy S. slope.

- 63.10 Crest of steep ascent, also S. edge of small bench, bear E. and W., asc. 15 ft. over small bench.
- 72.00 Base of ledgy rim, bears E. and W., asc. 50 ft. over ledgy S. slope.
- 78.00 Crest same rim, bears E. and W., thence over rolling land on top of Smoky Mtn.
- 80.00 Point for the cor. of secs. 23, 24, 25 and 26.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 12 ins. in the ground, in a mound of stone, 4 ft. base, to top, with brass cap mkd.

T41S R4E

$$\begin{array}{|l} S23 \\ S26 \end{array} \begin{array}{|l} S24 \\ S25 \end{array}$$

1965

Land, broken.
Soil, sand and exposed sandstone.
Timber, none.
Undergrowth, black brush and bunch grass.

From the cor. of secs. 19, 24, 25 and 30, on the E. bdy. of the Tp., marked by an iron post, $2\frac{1}{2}$ ins. diam., set, mkd. and witnessed as described in the survey of the E. bdy., in 1958.

N. $89^{\circ} 58'$ W., bet. secs. 24 and 25.

Over broken land of W. breaks of Last Chance Canyon, asc. 100 ft. over E. slope.

- 1.90 Spur, slopes S., asc. 150 ft. over ledgy bottom of canyo draining E.
- 36.80 Leave canyon bottom, which changes course to SW., asc. 240 ft. over ledgy and irregular SE. slope.
- 39.93 Point for the $1/4$ sec. cor. of secs. 24 and 25, falls on ledge facing SE. and cannot be monumented.
- 40.86 Point selected for the witness $1/4$ sec. cor. of secs. 24 and 25.
- Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T41S R4E

$$\frac{1}{4} \begin{array}{|l} S24 W \\ S25 C \end{array}$$

1965

Asc. 330 ft. over ledgy SE. slope.

- 55.60 Crest of steep ascent, W. rim of canyon, bears NE. and S., asc. 10 ft. over small bench.

Portion of the Subdivision of T. 41 S., R4 E.

CHAINS	
70.40	Base of ledgy rim, bears NE. and SW., asc. 50 ft. over ledgy SE. slope.
76.00	Crest of rim, bears NE. and SW., thence over rolling land of Smoky Mtn.
79.86	The cor. of secs. 23, 24, 25 and 26. Land, broken. Soil, sand and exposed sandstone. Timber, none. Undergrowth, black brush and bunch grass.
	N. 0°01' W., bet. secs. 23 and 24. Over rolling land on Smoky Mtn., through scattered timber, asc. gentle S. slope.
1.00	Crest of ascent, bears E. and W., desc. 50 ft. over gentle N. slope.
7.20	Bulldozed road, bears N. 70° E. and S. 70° W.
40.00	Point for the $\frac{1}{2}$ sec. cor. of secs. 23 and 24. Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd. <div style="text-align: center;"> T41S R4E $\frac{1}{2}$ S23 S24 1965 </div>
	Desc. 40 ft. over gentle N. slope.
62.00	Small wash, drains NW., asc. 20 ft. over gentle SW. slope.
72.80	S. rim of canyon, bears E. and SW., desc. 210 ft. over ledgy N. slope.
80.00	Point for the cor. of secs. 13, 14, 23 and 24. Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., on solid sandstone, over an X, in a mound of stone, 4 ft. base to top, with brass cap mkd. <div style="text-align: center;"> T41S R4E S14 S13 S23 S24 1965 </div>
	Land, rolling S. portion, broken N. portion. Soil, sand and exposed sandstone. Timber, very scattered scrub juniper. Undergrowth, shadscale and bunch grass.
	From the cor. of secs. 13, 18, 19 and 24, on the E. bdy. of the Tp., set, mkd. and witnessed as described in the survey of the E. bdy., in 1958. N. 89°58' W., bet. secs. 13 and 24. Over sandy land in bottom of Last Chance Canyon.
1.90	Base of ledgy breaks, bears N. and S., asc. 120 ft. over E. slope.

Portion of the Subdivision of T. 41 S., R. 4 E.

CHAINS	
6.80	Spur, slopes N., 20 ft. along broken N. slope.
27.70	Draw, drains NE., asc. 320 ft. over ledgy E. slope.
35.70	Spur, slopes NE., desc. 75 ft. over NW. slope.
39.93	Point for the $\frac{1}{2}$ sec. cor. of secs. 13 and 24. Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., on sandstone in a mound of stone, 4 ft. base to top, with brass cap mkd. T41S R4E $\frac{1}{2} \begin{array}{r} S 13 \\ S 24 \end{array}$ 1965
	Cor. falls in swale draining N., asc. 580 ft. over irregular E. slope.
64.60	Spur, slopes N., desc. 90 ft. along N. slope.
71.30	End of descent, thence along N. slope.
79.86	The cor. of secs. 13, 14, 23 and 24. Land, broken. Soil, sand and exposed sandstone. Timber, none. Undergrowth, scattered shadscale.
	N. $0^{\circ}01'$ W., bet. secs. 13 and 14. Over broken land, desc. about 720 ft. over ledgy N. slope. By triangulation, topography estimated.
28.00	Bottom of Smoke Hollow, drains E., asc. 500 ft. over ledgy S. slope.
40.00	Point for the $\frac{1}{2}$ sec. cor. of secs. 13 and 14. Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., on sandstone, in a mound of stone, 4 ft. base to top, with brass cap mkd. T41S R4E $\frac{1}{2} \begin{array}{r} S14 S13 \end{array}$ 1965
	Asc. 260 ft. over ledgy S. slope.
48.10	Slope changes, asc. 200 ft. along irregular E. slope.
73.50	High spur, slopes E., desc. 120 ft. over NE. slope.
80.00	Point for the cor. of secs. 11, 12, 13 and 14. Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd. T41S R4E $\frac{1}{2} \begin{array}{r} S11 S12 \\ S14 S13 \end{array}$ 1965

Portion of the Subdivision of T. 41 S., R. 4 E.

CHAINS	<p>Land, broken. Soil, sand and exposed sandstone. Timber, none. Undergrowth, scattered shadscale.</p>
	<p>From the cor. of secs. 7, 12, 13 and 18, on the E. bdy. of the Tp., marked by an iron post, 2½ ins. diam., set, mkd. and witnessed as described in the survey of the E. bdy. in 1958.</p>
	<p>N. 89° 48' W., bet. secs. 12 and 13.</p>
	<p>Over very broken land of E. breaks of Last Chance Canyon, asc. 545 ft. over ledgy E. slope.</p>
7.00	<p>Wash drains S. 40° E., asc. along E. slope.</p>
13.70	<p>Spur, slopes S., desc. about 200 ft. over W. slope. By triangulation, topography estimated.</p>
23.80	<p>Draw, drains S., asc. about 200 ft. over SW. slope.</p>
29.80	<p>Spur, slopes S., desc. about 200 ft. over irregular W. slope.</p>
39.90	<p>Point for the 1/4 sec. cor. of secs. 12 and 13.</p>
	<p>Set an iron post 30 ins. long, 2½ ins. diam., on sandstone, in a mound of stone, 4 ft. base to top, with brass cap mkd.</p>
	<p style="text-align: center;">T41S R4E $\frac{1}{4} \frac{S12}{S13}$ 1965</p>
	<p>Desc. 200 ft. over irregular SW. slope.</p>
64.80	<p>Wash in Last Chance Canyon, drains SE. from N., asc. about 800 ft. over irregular E. slope.</p>
77.30	<p>Spur, slopes NE., asc. 50 ft. over NE. slope.</p>
79.80	<p>The cor. of secs. 11, 12, 13 and 14.</p>
	<p>Land, broken. Soil, sand and exposed sandstone. Timber, none. Undergrowth, scattered shadscale.</p>
	<p>N. 0° 14' W., bet. secs. 11 and 12.</p>
	<p>Over broken and ledgy land, desc. 400 ft. over NE. slope. By triangulation, topography estimated.</p>
15.00	<p>Canyon, drains E., asc. 600 ft. over ledgy S. slope.</p>
32.00	<p>High Spur, slopes E., desc. 315 ft. over N. slope.</p>
39.90	<p>Point for the 1/4 sec. cor. of secs. 11 and 12.</p>
	<p>Set an iron post 30 ins. long, 2½ ins. diam., 12 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.</p>
	<p style="text-align: center;">T41S R4E $\frac{1}{4} \frac{S11 S12}{S12}$ 1965</p>

Portion of the Subdivision of T. 41 S., R. 4 E.

CHAINS

- Desc. 45 ft. over NE. slope.
- 46.70 Base of descent in cove on W. side of Last Chance Canyon, asc. 40 ft. along E. slope, in canyon bottom.
- 51.90 Low spur, slopes E., desc. 20 ft. along E. slope.
- 54.90 Small draw, drains SE., asc. 140 ft. over SE. slope.
- 61.60 Spur, slopes E., desc. 75 ft. over N. slope.
- 64.10 Wash in Last Chance Canyon, drains SE., asc. 70 ft. over SW. slope.
- 79.80 The cor. of secs. 1, 2, 11 and 12, marked by an iron post, 2½ ins. diam., set, mkd. and witnessed as described in the survey of a portion of the subdivision, in 1958.
- Land, broken.
Soil, sand and exposed sandstone.
Timber, none.
Undergrowth, scattered shadscale.
-
- From the true point for the cor. of secs. 1, 6, 7 and 12, on the E. bdy. of the Tp., from which its witness cor. bears North 14.34 chs. dist., marked by an iron post, 2½ ins. diam., set, mkd. and witnessed as described in the survey of the E. bdy., in 1958.
- N. 89° 54' W., bet. secs. 1 and 12.
- Over broken land on E. breaks of Last Chance Canyon, desc. about 200 ft. over ledgy W. slope. By triangulation topography estimated.
- 6.00 Bottom of ledgy draw, drains S., asc. 300 ft. over E. slope.
- 14.80 High spur, slopes S., desc. about 200 ft. along ledgy SW. slope.
- 39.99 Point for the 1/4 sec. cor. of secs. 1 and 12.
- Set an iron post 30 ins. long, 2½ ins. diam., 10 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.
- T41S R4E
½ $\frac{S1}{S12}$
1965
- Desc. 200 ft. over irregular SW. slope.
- 54.00 Wash in Rees Canyon, drains S., asc. 300 ft. over steep E. slope.
- 63.30 Spur, slopes S., desc. 250 ft. over steep SW. slope.
- 79.98 The cor. of secs. 1, 2, 11 and 12.
- Land, broken.
Soil, sand and exposed sandstone.
Timber, none.
Undergrowth, shadscale.
- Point for the N. 1/4 sec. cor. of sec. 1, on the N. bdy. of the Tp. and midpoint bet. the closing cor. of T. 41 S. Rs. 4 and 5 E. and the cor. of secs. 1 and 2 on the N. ; ;

Portion of the Subdivision of T. 41 S., R. 4 E.

CHAINS

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 8 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.

$\frac{1}{2}$ S1

T41S R4E

1965

From this cor., the standard $\frac{1}{4}$ sec. cor. of sec. 36, T. 40 S., R. 4 E., bears East 5.05 chs. dist., marked by an iron post, $2\frac{1}{2}$ ins. diam., set, mkd. and witnessed as described in the survey of the Eighth Standard Parallel South, in 1958.

From the cor. of secs. 2, 3, 34 and 35, on the S. bdy. of the Tp., marked by an iron post, 2 ins. diam., set, mkd. and witnessed as described in the survey of the S. bdy. in 1934.

N. $0^{\circ} 01' W.$, bet. secs. 34 and 35.

Over rolling sandy land on top of Smoky Mt., through shadscale and bunch grass.

40.00

Point for the $\frac{1}{4}$ sec. cor. of secs. 34 and 35.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 15 ins. in the ground, in a collar of stone, with brass cap mkd.

T41S R4E

$\frac{1}{2}$
S34|S35

1965

Continue over rolling land.

63.30

S. rim of cove, bears E. and curves NW., desc. 105 ft. over NE. slope in cove.

71.20

Bottom of descent in cove, drains E., asc. 105 ft. over SE. slope.

79.00

N. rim same cove, bears NE. and SW., thence over rolling land.

80.00

Point for the cor. of secs. 26, 27, 34 and 35.

Drilled an iron post 18 ins. long, 1 in. diam., in sandstone, 10 ins. deep, with brass cap mkd.

T41S R4E

S27|S26
S34|S35

1965

Raised mound of stone, 3 ft. base, $2\frac{1}{2}$ ft. high, west of cor.

Land, rolling, except in cove.
Soil, sand and exposed sandstone.
Timber, none.

Undergrowth, shadscale and bunch grass.

From the cor. of secs. 25, 26, 35 and 36.

Portion of the Subdivision of T. 41 S., R. 4 E.

CHAINS

S. 89° 56' W., bet. secs. 26 and 35.

Over broken land of E. breaks of Smoky Mt., asc. 140 ft. over steep SE. slope.

- 9.20 Ridge bears N. and S. irregular, desc. 410 ft. over irregular SW. slope.
- 25.70 Canyon, drains NE., asc. 285 ft. over steep NE. slope.
- 37.70 Spur, slopes N., desc. 10 ft. over NW. slope.
- 39.20 Small wash, drains NE., asc. E. slope.
- 39.97 Point for the 1/4 sec. cor. of secs. 26 and 35.
- Set an iron post 30 ins. long, 2½ ins. diam., on sandstone, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T41S R4E

½ $\frac{S26}{S35}$

1965

Asc. 240 ft. over E. slope.

- 53.80 Spur, slopes N., desc. 120 ft. over NW. slope.
- 63.50 Canyon, drains NE., asc. 335 ft. over SE. slope.
- 74.90 E. rim of Smoky Mt., bears N. and S. irregular, asc. 25 ft. over E. slope on mountain.
- 79.94 The cor. of secs. 26, 27, 34 and 35.

Land, broken.
Soil, sand and exposed sandstone.
Timber, none.
Undergrowth, shadscale.

West, bet. secs. 27 and 34.

Over rolling land on top of Smoky Mt., covered with black brush and bunch grass, asc. 30 ft. over gentle NE. slope.

- 21.90 Bulldozed road, bears NE. and SW.
- 31.20 Graded dirt road, bears N. 15° W. and S. 15° E., Glen City to Escalante.
- 40.04 Point for the 1/4 sec. cor. of secs. 27 and 34.
- Set an iron post 30 ins. long, 2½ ins. diam., 10 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T41S R4E

½ $\frac{S27}{S34}$

1965

Cor. falls on top of rise, desc. 25 ft. over gentle W. slope.

- 80.08 The cor. of secs. 27, 28, 33 and 34, marked by an iron post 2½ ins. diam., set, mkd. and witnessed as described

Portion of the Subdivision of T. 41 S., R. 4 E.

CHAINS

in the survey of a portion of the subdivision, in 1958.

Land, rolling.

Timber, none.

Soil, sand and exposed sandstone.

Undergrowth, black brush and bunch grass.

From the cor. of secs. 26, 27, 34 and 35.

N. 0°01' W., bet. secs. 26 and 27.

Over rolling land on top of Smoky Mt., desc. 60 ft. over NE. slope.

21.00 Head of draw, drains E., asc. 20 ft. along gentle E. slope.

39.90 Bulldozed road, bears NE. and SW.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 26 and 27.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., on sandstone, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T41S R4E

$\frac{1}{4}$

S27 | S26

1965

Asc. 20 ft. over gentle SE. slope.

50.90 Rise, bears E. and W., desc. 40 ft. over gentle NE. slope.

75.00 S. rim of cove, bears NE. and SW., desc. 55 ft. over NW. slope.

80.00 Point for the cor. of secs. 22, 23, 26 and 27.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., on sandstone, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T41S R4E

$\frac{S22}{S27}$ | $\frac{S23}{S26}$

1965

Land, rolling.

Soil, sand and exposed sandstone.

Timber, very scattered scrub juniper.

Undergrowth, black brush and bunch grass.

From the cor. of secs. 23, 24, 25 and 26.

S. 89°52' W., bet. secs. 23 and 26.

Over rolling land on top of Smoky Mt., desc. 35 ft. over gentle NW. slope.

10.50 Bulldozed road, bears N. 55° E. and S. 55° W.

40.02 Point for the $\frac{1}{4}$ sec. cor. of secs. 23 and 26.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.

Portion of the Subdivision of T. 41 S., R. 4 E.

CHAINS

T41S R4E

$$\frac{1}{2} \frac{S23}{S26}$$

1965

- Desc. 20 ft. over NW. slope.
- 69.40 Cove, drains NE., about 4.00 chs. SW. to head, asc. 65 ft. over E. slope.
- 75.70 Long spur, slopes NE., desc. 50 ft. over NW. slope, in to cove.
- 80.04 The cor. of secs. 22, 23, 26 and 27.
- Land, slightly broken.
Soil, sand and exposed sandstone.
Timber, scattered juniper.
Undergrowth, black brush and bunch grass.
-
- S. 89°59' W., bet. secs. 22 and 27.
- Over broken land in head of cove, desc. 60 ft. over NW. slope.
- 10.00 Wash in cove, drains NE., asc. 105 ft. over gentle NE. slope.
- 40.06 Point for the $\frac{1}{2}$ sec. cor. of secs. 22 and 27.
- Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 26 ins. in the ground, in a collar of stone, with brass cap mkd.
- T41S R4E
- $\frac{1}{2} \frac{S22}{S27}$
- 1965
- Asc. 45 ft. over gentle NE. slope.
- 70.10 Rise, bears NW. and SE., desc. 20 ft. over gentle SW. slope.
- 74.40 Graded dirt road, Escalante to Glen City, bears N. 28° W. and S. 28° E.
- 80.12 The cor. of secs. 21, 22, 27 and 28, marked by an iron post, $2\frac{1}{2}$ ins. diam., set, mkd. and witnessed as described in the survey of a portion of the subdivision, in 1958.
- Land, rolling.
Soil, sand and exposed sandstone.
Timber, scattered juniper.
Undergrowth, black brush and bunch grass.
-
- From the cor. of secs. 22, 23, 26 and 27.
- N.0°01' W., bet. secs. 22 and 23.
- Over broken land on Smoky Mt., desc. 320 ft. over NW. slope.
- 21.00 Smoke Hollow, drains NE., asc. 100 ft. along E. slope.
- 40.00 Point for the $\frac{1}{2}$ sec. cor. of secs. 22 and 23.

Portion of the Subdivision of T. 41 S., R. 4 E.

CHAINS

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 12 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T41S R4E

$\frac{1}{2}$
S22 | S23

1965

Asc. 200 ft. over SE. slope.

57.20 N. rim of Smoke Hollow, bears NE. and SW., desc. 60 ft. over gentle NE. slope, on Mt. top. Enter medium growth of scrub juniper.

80.00 Point for the cor. of secs. 14, 15, 22 and 23.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 15 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T41S R4E

S15 | S14
S22 | S23

1965

Land, broken.

Soil, sand and exposed sandstone.

Timber, scattered juniper.

Undergrowth, black brush and bunch grass.

From the cor. of secs. 13, 14, 23 and 24.

S. $89^{\circ}48'$ W., bet. secs. 14 and 23.

Over broken land, desc. 500 ft. over ledgy NW. slope, into Smoke Hollow.

25.10 Bottom of Smoke Hollow, drains NE., asc. 320 ft. over irregular SE. slope.

40.06 Point for the $\frac{1}{2}$ sec. cor. of secs. 14 and 23.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 12 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T41S R4E

$\frac{1}{2}$ S14
S23

1965

Asc. 330 ft. over ledgy SE. slope.

57.40 N. rim of Smoke Hollow, bears NE. and SW., asc. 60 ft. over gentle NE. slope, on mountain top.

80.12 The cor. of secs. 14, 15, 22 and 23.

Land, broken.

Soil, sand and exposed sandstone.

Timber, scrub juniper.

Undergrowth, black brush and bunch grass.

Portion of the Subdivision of T. 41 S., R. 4 E.

CHAINS	
	N. 89°56' W., bet. secs. 15 and 22.
	Over broken land, through scrub juniper, 30 ft. over NE. slope.
9.40	E. rim small canyon, bears N. and S., desc. 150 ft. over NW. slope.
18.00	Bottom of canyon, drains N. 20° E., asc. 150 ft. over NE. slope.
22.00	W. rim same canyon, bears NW. and SE., asc. 40 ft. over NE. slope, on mountain top.
40.08	Point for the $\frac{1}{4}$ sec. cor. of secs. 15 and 22. Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., on solid sandstone, in a mound of stone, 4 ft. base to top, with brass cap mkd. T41S R4E $\frac{1}{4}$ $\frac{S15}{S22}$ 1965
	Continue along gentle N. slope.
52.80	E. rim small canyon, bears NE. and SW., desc. 160 ft. over NW. slope.
65.00	Bottom of canyon, drains NE., asc. 160 ft. over E. slope.
72.00	W. rim of same canyon, bears NE. and SW., asc. 20 ft. over gentle NE. slope, on top of Smoky Mt.
80.16	The cor. of secs. 15, 16, 21 and 22, marked by an iron post, $2\frac{1}{2}$ ins. diam., set, mkd. and witnessed as described in the survey of a portion of the subdivision, in 1958. Land, broken. Soil, sand and exposed sandstone. Timber, scrub juniper. Undergrowth, black brush and bunch grass.
	From the cor. of secs. 14, 15, 22 and 23. N. 0°01' W., bet. secs. 14 and 15. Over rolling land, asc. 25 ft. over gentle SE. slope.
6.20	Low rise, slopes NE., desc. 50 ft. over NW. slope.
12.60	Rim, bears NE. and SE., desc. 400 ft. over ledgy NW. slope, into Left Fork of Water Canyon.
40.00	Point for the $\frac{1}{4}$ sec. cor. of secs. 14 and 15. Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd. T41S R4E $\frac{1}{4}$ S15 S14 1965
	Desc. 110 ft. over NW. slope.

Portion of the Subdivision of T. 41 S., R. 4 E.

CHAINS					
51.60	Left Fork of Water Canyon, drains NE., asc. 200 ft. over SE. slope.				
67.00	Spur, slopes E., asc. 120 ft. along broken E. slope.				
80.00	Point for the cor. of secs. 10, 11, 14 and 15.				
	Set an iron post 30 ins. long, 2½ ins. diam., 6 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.				
	T41S R4E				
	<table border="1" style="margin: auto;"> <tr> <td style="padding: 2px;">S10</td> <td style="padding: 2px;">S11</td> </tr> <tr> <td style="padding: 2px;">S15</td> <td style="padding: 2px;">S14</td> </tr> </table>	S10	S11	S15	S14
S10	S11				
S15	S14				
	1965				
	Land, broken. Soil, sand and exposed sandstone. Timber, scrub juniper. Undergrowth, scattered shadscale.				
	From the cor. of secs. 11, 12, 13 and 14.				
	S. 89° 46' W., bet. secs. 11 and 14.				
	Over broken land, asc. 75 ft. along irregular N. slope.				
16.70	Spur, slopes NE., desc. 100 ft. over NW. slope.				
40.07	Point for the 1/4 sec. cor. of secs. 11 and 14.				
	Set an iron post 30 ins. long, 2½ ins. diam., 6 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.				
	T41S R4E				
	<table border="1" style="margin: auto;"> <tr> <td style="padding: 2px;">½</td> <td style="padding: 2px;">S11</td> </tr> <tr> <td></td> <td style="padding: 2px;">S14</td> </tr> </table>	½	S11		S14
½	S11				
	S14				
	1965				
	Desc. 385 ft. over steep NW. slope.				
61.40	Bottom of Left Fork of Water Canyon, drains NE., asc. 380 ft. over broken SE. slope.				
80.14	The cor. of secs. 10, 11, 14 and 15.				
	Land, broken. Soil, sand and exposed sandstone. Timber, scrub juniper. Undergrowth, shadscale.				
	N. 89° 50' W., bet. secs. 10 and 15.				
	Over broken land, asc. 70 ft. over steep E. slope.				
7.00	Rim, bears N. and S. irregular, asc. 80 ft. over general E. slope, on mountain top.				
40.04	Point for the 1/4 sec. cor. of secs. 10 and 15.				
	Set an iron post 30 ins. long, 2½ ins. diam., 10 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.				

Portion of the Subdivision of T. 41 S., R. 4 E.

CHAINS

T41S R4E

 $\frac{1}{2}$ $\frac{S10}{S15}$

1965

Asc. 60 ft. over rolling mountain top, through scrub timber.

80.08 The cor. of secs. 9, 10, 15 and 16, marked by an iron post, $2\frac{1}{2}$ ins. diam., set, mkd. and witnessed as described in the survey of a portion of the subdivision, in 1958.

Land, mostly rolling.
Soil, sand and exposed sandstone.
Timber, scrub juniper.
Undergrowth, black brush and bunch grass.

From the cor. of secs. 10, 11, 14 and 15.

N. $0^{\circ} 08'$ W., bet. secs. 10 and 11.

Over broken land on E. breaks of Smoky Mt., asc. 300 ft. along ledgy E. slope.

25.00 High spur, slopes E., desc. 500 ft. over ledgy NE. slope.

39.50 Bottom of Right Fork of Water Canyon, drains SE., asc. 25 ft. over steep SW. slope.

40.13 Point for the $\frac{1}{4}$ sec. cor. of secs. 10 and 11, at midpoint.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 8 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T41S R4E

 $\frac{1}{2}$ S10|S11

1965

Asc. 525 ft. over ledgy SW. slope.

59.50 N. rim of Water Canyon, bears NW. and SE., asc. 105 ft. over SW. slope, on mountain top. Enter medium growth timber.

79.20 Bulldozed road, bears N. 80° W. and S. 80° E.

80.26 The cor. of secs. 2, 3, 10 and 11, marked by an iron post, $2\frac{1}{2}$ ins. diam., set, mkd. and witnessed as described in the survey of a portion of the subdivision, in 1958.

Land, broken.
Soil, sand and exposed sandstone.
Timber, juniper and pinon on mountain top.
Undergrowth, black brush and bunch grass.

N. $89^{\circ} 57'$ W., bet. secs. 3 and 10.

Over rolling land on Smoky Mt., through medium growth of timber, desc. 45 ft. over SW. slope.

Portion of the Subdivision of T. 41 S., R. 4 E.

CHAINS

- 1.50 Bulldozed road, bears NW. and SE.
- 31.90 Head of draw, drains SE. into Water Canyon.
- 39.98 Point for the 1/4 sec. cor. of secs. 3 and 10.
Set an iron post 30 ins. long, 2½ ins. diam., 18 ins. in the ground, in a collar of stone, with brass cap mkd.
- T41S R4E
½ $\frac{S3}{S10}$
1965
- Asc. 70 ft. over general E. slope.
- 71.60 Bulldozed road, bears N. 25° E. and S. 25° W.
- 79.96 The cor. of secs. 3, 4, 9 and 10, marked by an iron post, 2½ ins. diam., set, mkd. and witnessed as described in the survey of a portion of the subdivision, in 1958.
- Land, rolling.
Soil, sand.
Timber, juniper and pinon.
Undergrowth, black brush and bunch grass.
- Point for the N. 1/4 sec. cor. of sec. 3, on the N. bdy. of the Tp. and midpoint bet. the cor. of secs. 2 and 3, and the closing cor. of secs. 3 and 4.
- Set an iron post 30 ins. long, 2½ ins. diam., on sandstone, in a mound of stone, 4 ft. base to top, with brass cap mkd.
- ½ S3
T41S R4E
1965
- From this cor., the true point for the standard 1/4 sec. cor. of sec. 34, T. 40 S., R. 4 E., bears East 4,975 chs. dist., from which its witness cor. bears East 0.20 chs. dist., marked by an iron post 2½ ins. diam., set, mkd. and witnessed as described in the survey of the Eighth Standard Parallel South, in 1958.
- From the cor. of secs. 27, 28, 33 and 34.
S. 89° 50' W., bet. secs. 28 and 33.
- Over rolling land on top of Smoky Mt., desc. 110 ft. over general W. slope.
- 25.60 E. rim of Smoky Hollow, bears N. 75° E. and S. 75° W., desc. 265 ft. over NW. slope of spur, which slopes SW.
- 39.95 Point for the 1/4 sec. cor. of secs. 28 and 33.
Set an iron post 30 ins. long, 2½ ins. diam., 8 ins. in the ground, in a mound of stone, 4 ft. base, to top, with brass cap mkd.

Portion of the Subdivision of T. 41 S., R. 4 E.

CHAINS

T41S R4E

$\frac{1}{2}$ S28
S33

1965

Cor. falls in small swale draining N., asc. 20 ft. along N. slope.

42.60 Small spur, slopes N., desc. 110 ft. along N. slope.

54.30 Wash, drains NE., asc. 45 ft. over NE. slope.

62.00 Spur, slopes NW., desc. 165 ft. over NW. slope.

73.30 Bottom of canyon, drains SW., asc. 105 ft. over SE. slope.

78.40 Spur, slopes SE., thence along S. slope on spur.

79.90 The cor. of secs. 28, 29, 32 and 33, marked by an iron post, 2½ ins. diam., set, mkd. and witnessed as described in the survey of a portion of the subdivision, in 1958.

Land, broken.
Soil, sand and exposed sandstone.
Timber, none.
Undergrowth, shadscale.

N. 0° 03' W., bet. secs. 28 and 29.

Over broken and ledgy land, asc. 250 ft. along E. slope. By triangulation, topography scaled from U.S.G.S. topographic sheets.

24.00 Spur, slopes SE., desc. 50 ft. along E. slope.

30.00 Wash, drains E., asc. 80 ft. along E. slope.

40.00 Point for the 1/4 sec. cor. of secs. 28 and 29.

Set an iron post 30 ins. long, 2½ ins. diam., 12 ins. in the ground, in a mound of stone, with brass cap mkd.

T41S R4E

$\frac{1}{2}$ S29 | S28

1965

Asc. 80 ft. along E. slope, on top of spur.

56.00 Base of ledgy rim, bears N. and curves SW., asc. 90 ft. over S. slope of rim.

59.00 Crest same rim, bears N. and curves SW., asc. 20 ft. over gentle S. slope on top of spur, which slopes S.

80.00 Point for the cor. of secs. 20, 21, 28 and 29.

Set an iron post 30 ins. long, 2½ ins. diam., on sandstone, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T41S R4E

S20 | S21
S29 | S28

1965

Portion of the Subdivision of T. 41 S., R. 4 E.

CHAINS

Land, broken.
Soil, sand and exposed sandstone.
Timber, none.
Undergrowth, shadscale.

From the cor. of secs. 21, 22, 27 and 28.

S. 89°50' W., bet. secs. 21 and 28.

Over rolling land on top of Smoky Mt., desc. 75 ft. over gentle SW. slope.

39.60 Wash, 5 ft. deep, 150 lks. wide, drains S.

39.93 Point for the $\frac{1}{4}$ sec. cor. of secs. 21 and 28.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 8 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T41S R4E

$$\frac{\frac{1}{4} \text{ S21}}{\text{S28}}$$

1965

Desc. 60 ft. over gentle SW. slope.

74.70 E. rim of canyon, bears N. and SE. irregular, desc. 120 ft. over W. slope.

79.86 The cor. of secs. 20, 21, 28 and 29.

Land, mostly rolling.
Soil, sand and exposed sandstone.
Timber, none.
Undergrowth, black brush and bunch grass.

N. 0°09' W., bet. secs. 20 and 21.

Over broken land of W. breaks of Smoky Mt., desc. 130 ft. along W. slope.

13.60 Small draw, drains W., asc. 75 ft. over SW. slope.

18.50 Spur, slopes W., desc. 170 ft. over NW. slope.

28.30 Bottom of small draw, drains W., asc. 110 ft. over SW. slope.

37.80 Spur, slopes W., desc. 60 ft. over NW. slope.

40.13 Point for the $\frac{1}{4}$ sec. cor. of secs. 20 and 21, at midpoint.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 12 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T41S R4E

$$\frac{\frac{1}{4} \text{ S20} | \text{S21}}{1965}$$

1965

Desc. 20 ft. over NW. slope.

40.90 Bottom of canyon, drains SW., asc. 250 ft. over steep SE. slope.

Portion of the Subdivision of T. 41 S., R. 4 E.

CHAINS

- 58.40 N. rim of canyon, curves SW. and SE. irregular, asc.
70 ft. over S. slope on Smoky Mtn. Enter scrub juniper.
- 80.26 The cor. of secs. 16, 17, 20 and 21, marked by an iron post 2½ ins. diam., set, mkd. and witnessed as described in the survey of a portion of the subdivision, in 1958.
- Land, broken.
Soil, sand and exposed sandstone.
Timber, scrub juniper on N. portion.
Undergrowth, black brush and bunch grass.
- From the cor. of secs. 8, 9, 16 and 17, marked by an iron post 2½ ins. diam., set, mkd. and witnessed as described in the survey of a portion of the subdivision, in 1958.
- N. 0°03' W., bet. secs. 8 and 9.
- Over rolling land on top of Smoky Mt., through pinon and juniper.
- 40.00 Point for the ¼ sec. cor. of secs. 8 and 9.
- Set an iron post 30 ins. long, 2½ ins. diam., 8 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.
- T41S R4E
¼
S8|S9
1965
- Continue over rolling Mt. top.
- 59.80 Bulldozed road, curves S. 80° E. and S. 70° W.
- 67.50 Wash, 2 ft. deep, 20 lks. wide, drains NE.
- 80.00 Point for the cor. of secs. 4, 5, 8 and 9.
- Set an iron post 30 ins. long, 2½ ins. diam., 6 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.
- T41S R4E
S5 | S4
S8 | S9
1965
- Land, rolling.
Soil, sand and exposed sandstone.
Timber, scrub juniper and pinon.
Undergrowth, black brush and bunch grass.
-
- From the cor. of secs. 3, 4, 9 and 10.
- S. 89°55' W., bet. secs. 4 and 9.
- Over rolling land on top of Smoky Mt., through scrub juniper and pinon, asc. 90 ft. over gentle NE. slope.
- 40.00 Point for the ¼ sec. cor. of secs. 4 and 9.
- Set an iron post 30 ins. long, 2½ ins. diam., 10 ins. in the ground, in a mound of stone, 4 ft. base to top, with

Portion of the Subdivision of T. 41 S., R. 4 E.

CHAINS	
	<p style="text-align: center;">T41S R4E $\frac{1}{2} \frac{S4}{S9}$ 1965</p> <p>Asc. 45 ft. over gentle NE. slope.</p>
51.40	Bulldozed road, bears N. 65° E. and S. 65° W., desc. 35 ft. over gentle W. slope.
76.50	Bottom of head of small canyon, drains N., continue over mtn. land.
80.00	The cor. of secs. 4, 5, 8 and 9.
	<p>Land, rolling mountain. Soil, sand and exposed sandstone. Timber, scrub juniper and pinon. Undergrowth, black brush and bunch grass.</p>
	<p>N. 0° 03' W., bet. secs. 4 and 5.</p> <p>Over broken land on top of Smoky mtn., desc. 100 ft. along irregular E. slope, over series of sandstone gullies, draining eastward.</p>
3.30	Gully, about 50 ft. deep, drains NE.
21.90	Head of small canyon, 80 ft. deep, drains E.
38.00	Head of small canyon, 80 ft. deep, drains E.
40.00	Point for the 1/4 sec. cor. of secs. 4 and 5, falls on small ledge facing S. and cannot be monumented.
40.06	Point selected for the witness 1/4 sec. cor. of secs. 4 and 5.
	<p>Set an iron post 30 ins. long, 2½ ins. diam., 6 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.</p>
	<p style="text-align: center;">T41S R4E $\frac{1}{2}$ S5 S4 ↓ W C 1965</p>
	Asc. 30 ft. over SE. slope.
44.20	Rise, bears NE. and SW., desc. 80 ft. over NW. slope, over broken sandstone formation.
79.90	Point selected for the witness 80 1/16 sec. cor. of secs. 4 and 5.
	<p>Set an iron post 30 ins. long, 2½ ins. diam., 8 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.</p>
	<p style="text-align: center;">T41S R4E 1/16 W C S5 ↑ S4 80 1965</p>

Portion of the Subdivision of T. 41 S., R. 4 E.

CHAINS

- 80.00 True point for the 80 1/16 sec. cor. of secs. 4 and 5 falls on small sandstone ledge and cannot be perpetuated
- 90.74 Intersect the N. bdy. (Eighth Standard Parallel South).
Point for the closing cor. of secs. 4 and 5.
Set an iron post 30 ins. long, 2½ ins. diam., on sandstone, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T40S R4E
S32

S5	S4
C C	

T41S R4E
1965

From this cor., the standard cor. of secs. 32 and 33, T. 40 S., R. 4 E., bears East 4.81 chains dist., marked by an iron post 2½ ins. diam., set, mkd. and witnessed as described in the survey of the Eighth Standard Parallel South, in 1958.

Land, broken.

Soil, sand and exposed sandstone.

Timber, juniper and pinon.

Undergrowth, black brush and bunch grass.

Point for the N. 1/4 sec. cor. of sec. 4, on the N. bdy. of the Tp. and midpoint bet. the closing cor. of secs. 3 and 4, and the closing cor. of secs. 4 and 5.

Set an iron post 30 ins. long, 2½ ins. diam., 10 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.

½	S4
T41S R4E	

1965

From this cor., the standard 1/4 sec. cor. of sec. 33, T. 40 S., R. 4 E., bears East 4.885 chains dist., marked by an iron post 2½ ins. diam., set, mkd. and witnessed as described in the survey of the Eighth Standard Parallel South, in 1958.

From the cor. of secs. 29, 30, 31 and 32, marked by an iron post, 2½ ins. diam., set, mkd. and witnessed as described in the survey of a portion of the subdivision, in 1958.

West, bet. secs. 30 and 31.

Over broken land of E. breaks of Warm Creek, asc. 255 ft. over ledgy SE. slope.

- 15.80 Crest of ledgy SE. slope, bears NE. and SW., asc. 10 ft. over top of mesa.
- 20.20 Bulldozed road, bears N. 30° E. and S. 30° W.
- 21.40 Top of ascent on mesa, bears N. and S., desc. 45 ft. over gentle W. slope.

Portion of the Subdivision of T. 41 S., R. 4 E.

CHAINS

34.00 E. rim of broken canyon, bears N. and S. irregular, desc. 65 ft. over irregular W. slope.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 30 and 31, falls on small ledge facing W. and cannot be monumented.

40.10 Point selected for the witness $\frac{1}{4}$ sec. cor. of secs. 30 and 31.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., on solid sandstone, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T41S R4E

$\frac{1}{4}$ $\frac{S30 W}{S31 C}$

1965

Desc. 235 ft. over irregular SW. slope.

63.00 Spur, slopes SW., desc. 345 ft. over irregular and ledgy W. slope.

77.64 Intersect the W. bdy. of the Tp.

Point for the closing cor. of secs. 30 and 31.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T41S
R4E
T41S
R3E $\frac{S30 C}{S31 C}$

1965

From this cor. the cor. of secs. 25 and 36, T. 41 S., R. 3 E., bears North 4.85 chains dist., marked by an iron post $2\frac{1}{2}$ ins. diam., set, mkd. and witnessed as described in the survey of the E. bdy. of T. 41 S., R. 3 E., in 1958.

Land, broken.
Soil, sand and exposed sandstone.
Timber, none.
Undergrowth, shadscale.

Point for the W. $\frac{1}{4}$ sec. cor. of secs. 31, on the W. bdy. of the Tp. and midpoint bet. the closing cor. of Tps. 41 and 42 S., R. 4 E., and the closing cor. of secs. 30 and 31.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 12 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T41S
R4E
 $\frac{1}{4}$
S31

1965

From this cor. the true point for the W. $\frac{1}{4}$ sec. cor. of sec. 36, T. 41 S., R. 3 E., bears North 4.77 chs. dist., from which its witness cor. bears North 0.10 chains dist., marked by an iron post $2\frac{1}{2}$ ins. diam., set, mkd. and

Portion of the Subdivision of T. 41 S., R. 4 E.

CHAINS

witnessed as described in the survey of the E. bdy. of T. 41 S., R. 3 E., in 1958.

From the cor. of secs. 29, 30, 31 and 32.

N. 0°03' W., bet. secs. 29 and 30.

Over broken land, asc. 255 ft. over SE. slope.


11.30 Crest of rim, bears NE. and SW., asc. 15 ft. over rolling land on W. edge of Smoky Mt.

27.10 Bulldozed road, bears NE. and SW., desc. 10 ft. over rolling land.

40.00 Point for the 1/4 sec. cor. of secs. 29 and 30.

Set an iron post 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.

T41S R4E



1965

Raised mound of stone, 2 1/2 ft. base, 2 1/2 ft. high W. of cor.


Desc. 45 ft. over rolling W. slope.

76.70 S. Rim of cove, bears NE. and SW., desc. 65 ft. over NW. slope.

80.00 Point for the cor. of secs. 19, 20, 29 and 30.

Set an iron post 30 ins. long, 2 1/2 ins. diam., 6 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T41S R4E



1965

Land, broken N. and S. portion, rolling center portion. Soil, sand and exposed sandstone.

Timber, none.

Undergrowth, shadscale and bunch grass.

From the cor. of secs. 20, 21, 28 and 29.

N. 89°56' W., bet. secs. 20 and 29.

Over broken land on W. breaks of Smoky Mt., desc. 330 ft. over ledgy W. slope.

14.20 Bottom of canyon, drains S., asc. 115 ft. over E. slope.

23.80 Spur, slopes SE., desc. 50 ft. over SW. slope.

29.17 Small draw, drains SE., asc. 70 ft. over NE. slope.

40.05 Point for the 1/4 sec. cor. of secs. 20 and 29.

Portion of the Subdivision of T. 41 S., R. 4 E.

CHAINS

Set an iron post 30 ins. long, 2½ ins. diam., 8 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T41S R4E

$\frac{1}{4}$ $\frac{S20}{S29}$

1965

Asc. 250 ft. over ledgy E. slope.

48.50 W. rim of canyon, bears N. and S. irregular, thence over rolling land.

62.60 Bulldozed road, bears N. 25° E. and S. 25° W., desc. gentle W. slope.

78.00 E. crest of cove, bears NE. and SW., desc. 90 ft. over NW. slope.

80.10 The cor. of secs. 19, 20, 29 and 30.

Land, broken on E. and W. portion, rolling center portion.

Soil, sand and exposed sandstone.

Timber, none.

Undergrowth, shadscale and bunch grass.

West bet. secs. 19 and 30.

Over broken land on W. breaks of Smoky Mt., desc. 60 ft. over broken NW. slope, in cove.

17.10 Crest of steep descent, bears NW. and SE., desc. 305 ft. over steep SW. slope.

29.80 Bottom of canyon, drains SW., asc. 100 ft. over SE. slope.

40.00 Point for the ¼ sec. cor. of secs. 19 and 30.

Set an iron post 30 ins. long, 2½ ins. diam., 6 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T41S R4E

$\frac{1}{4}$ $\frac{S19}{S30}$

1965

Asc. 20 ft. over SE. slope.

44.60 Spur, slopes SW., desc. 305 ft. over NW. slope.

69.90 Bottom of canyon, drains S. 20° W., also bulldozed road, asc. 155 ft. over SE. slope.

77.56 Intersect the W. bdy. of the Tp.

Point for the closing cor. of secs. 19 and 30.

Set an iron post 30 ins. long, 2½ ins. diam., on solid sandstone, in a mound of stone, 4 ft. base to top, with brass cap mkd.

Portion of the Subdivision of T. 41 S., R. 4 E.

CHAINS

	T41S	
	R4E	
T41S		S19 C
R3E		S30 C
		1965

From this cor. the cor. of secs. 24 and 25, T. 41 S., R. 3 E., bears North 4.62 chs. dist., marked by an iron post 2½ ins. diam., set, mkd. and witnessed as described in the survey of the E. bdy. of T. 41 S., R. 3 E., in 1958.

Land, broken.
Soil, sand and exposed sandstone.
Timber, none.
Undergrowth, shadscale and bunch grass.

Point for the W. ¼ sec. cor. of sec. 30, on the W. bdy. of the Tp. and midpoint bet. the closing cor. of secs. 30 and 31, and the closing cor. of secs. 19 and 30.

Set an iron post 30 ins. long, 2½ ins. diam., 6 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.

	T41S	
	R4E	
	¼	
	S30	
		1965

From this cor. the E. ¼ sec. cor. of sec. 25, T. 41 S., R. 3 E., bears North 4.735 chains dist., marked by an iron post 2½ ins. diam., set, mkd. and witnessed as described in the survey of the E. bdy. of T. 41 S., R. 3 E., in 1958.

From the cor. of secs. 19, 20, 29 and 30.

N. 0°03' W., bet. secs. 19 and 20.

Over broken land on W. breaks of Smoky Mt., desc. NW. slope.

- .20 Wash, drains W., asc. 50 ft. over SW. slope.
- 9.00 Sandstone spur, slopes W., desc. 60 ft. over NW. slope, into cove.
- 15.00 Bottom of descent, drains W., asc. 80 ft. over SW. slope,
- 23 20 N. rim of cove, bears W. and SE., desc. 75 ft. over broken land draining W.
- 40.00 Point for the ¼ sec. cor. of secs. 19 and 20.

Set an iron post 30 ins. long, 2½ ins. diam., on sandstone, in a mound of stone, 4 ft. base to top, with brass cap mkd.

	T41S	R4E
	¼	
	S19	S20
		1965

Desc. 30 ft. along broken W. slope.

Portion of the Subdivision of T. 41 S., R. 4 E.

CHAINS	
46.00	S. rim of canyon, bears NE. and W., desc. 300 ft. over NW. slope.
60.00	Bottom of canyon, drains SW., asc. 360 ft. over ledgy S. slope.
76.50	N. rim same canyon, bears E. and W., thence over broken sandstone formation draining W. Enter scrub juniper.
80.00	<p>Point for the cor. of secs. 17, 18, 19 and 20.</p> <p>Set an iron post 30 ins. long, 2½ ins. diam., on sandstone, in a mound of stone, 4 ft. base to top, with brass cap mkd.</p> <p style="text-align: center;">T41S R4E</p> <p style="text-align: center;">$\frac{S18 S17}{S19 S20}$</p> <p style="text-align: center;">1965</p> <p>Land, broken. Soil, sand and exposed sandstone. Timber, scrub juniper on N. portion. Undergrowth, shadscale and bunch grass.</p>
	<p>From the cor. of 16, 17, 20 and 21.</p> <p>S. 89°54' W., bet. secs. 17 and 20.</p> <p>Over rolling land on top of Smoky Mt., desc. 30 ft. over general SW. slope. Through scrub timber.</p>
1.80	Bulldozed road, bears NE. and SW.
30.60	Bulldozed road, bears NE. and SW.
40.01	<p>Point for the ¼ sec. cor. of secs. 17 and 20.</p> <p>Set an iron post 30 ins. long, 2½ ins. diam., on solid sandstone, in a mound of stone, 4 ft. base to top, with brass cap mkd.</p> <p style="text-align: center;">T41S R4E</p> <p style="text-align: center;">$\frac{1}{4} \frac{S17}{S20}$</p> <p style="text-align: center;">1965</p> <p>Desc. 75 ft. over general SW. slope.</p>
40.20	Small wash, drains SW.
76.50	Small sandstone hollow, about 50 ft. deep, drains SW.
80.02	<p>The cor. of secs. 17, 18, 19 and 20.</p> <p>Land, rolling to slightly broken. Soil, sand and exposed sandstone. Timber, scattered juniper. Undergrowth, shadscale and bunch grass.</p>
	<p>West, bet. secs. 18 and 19.</p> <p>Over broken land on top of Smoky Mt., desc. 90 ft. over W. slope.</p>
3.70	Bulldozed road, bears N. 30° E. and S. 30° W.

Portion of the Subdivision of T. 41 S., R. 4 E.

CHAINS

40.00

Point for the $\frac{1}{2}$ sec. cor. of secs. 18 and 19.Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T41S R4E

$$\frac{S18}{\frac{1}{2} S19}$$

1965

Set cedar post 6 ins. diam., 6 ft. high beside corner.

Desc. 40 ft. over W. slope.

55.00

E. rim of canyon, bears N. 20° W. and S. 20° E., desc. 330 ft. over steep W. slope.

72.40

Bottom of canyon, drains S., also bulldozed road in canyon bottom, asc. 195 ft. over steep E. slope.

77.43

Intersect the W. bdy. of the Tp.

Point for the closing cor. of secs. 18 and 19.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 14 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.

	T41S	
	R4E	
T41S	S18	C
R3E	S19	C
		1965

From this cor. the cor. of secs. 13 and 24, T. 41 S., R. 3 E., bears North 4.98 chs. dist., marked by an iron post $2\frac{1}{2}$ ins. diam., set, mkd. and witnessed as recorded in the survey of the E. bdy. of T. 41 S., R. 3 E., in 1958.

Land, rolling E. portion, broken W. portion.
 Soil, sand and exposed sandstone.
 Timber, scrub juniper.
 Undergrowth, shadscale and bunch grass.

Point for the W. $\frac{1}{2}$ sec. cor. of sec. 19, on the W. bdy. of the Tp. and midpoint bet. the closing cor. of secs. 19 and 30, and the closing cor. of secs. 18 and 19.Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 12 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.

	T41S	
	R4E	
	$\frac{1}{2}$	
	S19	
		1965

From this cor. the E. $\frac{1}{2}$ sec. cor. of sec. 24, T. 41 S., R. 3 E., bears North 4.80 chs. dist., marked by an iron post $2\frac{1}{2}$ ins. diam., set mkd. and witnessed as described in the record of the survey of the E. bdy. of T. 41 S., R. 3 E., in 1958.

From the cor. of secs. 17, 18, 19 and 20.

Portion of the Subdivision of T. 41 S., R. 4 E.

CHAINS	
14.10	<p>N. 0°03' W., bet. secs. 17 and 18.</p> <p>Over broken land on Smoky Mt., asc. 20 ft. over SW. slope.</p> <p>Bulldozed road on top of rise, which bears NE. and SW., desc. 15 ft. over NW. slope.</p>
27.00	<p>S. rim of small cove, bears E. and W., cove heads about 12.00 chs. E., desc. 40 ft. over N. slope.</p>
38.00	<p>Wash in cove, drains W., asc. 10 ft. over S. slope.</p>
40.00	<p>Point for the $\frac{1}{4}$ sec. cor. of secs. 17 and 18.</p> <p>Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., on sandstone, in a mound of stone, 4 ft. base to top, with brass cap mkd.</p>
	<p style="text-align: center;">T41S R4E $\frac{1}{4}$ S18 S17 1965</p>
	<p>Asc. 45 ft. over S. slope.</p>
49.70	<p>N. rim same cove, bears E. and W., asc. 20 ft. over SW. slope.</p>
60.20	<p>Bulldozed road on top of rise, which bears E. and W., desc. 35 ft. over NW. slope.</p>
80.00	<p>Point for the cor. of secs. 7, 8, 17 and 18.</p> <p>Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;">T41S R4E <u>S 7 S 8</u> S18 S17 1965</p>
	<p>Raised mound of stone $2\frac{1}{2}$ ft. base, $2\frac{1}{2}$ ft. high, west of corner.</p>
	<p>Land, slightly broken. Soil, sand and exposed sandstone. Timber, juniper and pinon. Undergrowth, black brush and bunch grass.</p>
	<p>From the cor. of 8, 9, 16 and 17.</p>
	<p>S. 89°47' W., bet. secs. 8 and 17.</p>
	<p>Over rolling land on top of Smoky Mt., through scattered timber.</p>
19.20	<p>Graded dirt road, Glen City to Escalante, bears N. 33° W. and S. 33° E.</p>
39.80	<p>Bulldozed road, bears N. 65° E. and S. 65° W.</p>
40.04	<p>Point for the $\frac{1}{4}$ sec. cor. of secs. 8 and 17.</p> <p>Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>

Portion of the Subdivision of T. 41 S., R. 4 E.

CHAINS

T41S R4E

$$\frac{1}{4} \frac{S 8}{S17}$$

1965

Raised mound of stone, 3 ft. base, 2½ ft. high, west of corner.

Desc. 75 ft. over gentle NW. slope.

80.08 The cor. of secs. 7, 8, 17 and 18.

Land, rolling mountain top.
Soil, sand and exposed sandstone.
Timber, scattered juniper and pinon.
Undergrowth, black brush and bunch grass.

West, bet. secs. 7 and 18.

Over rolling land on top of Smoky Mt., through scattered timber, asc. 15 ft. over gentle SE. slope.

7.50 Low spur, slopes S., desc 210 ft. over W. slope.

40.00 Point for the ¼ sec. cor of secs. 7 and 18.

Set an iron post 30 ins. long, 2½ ins. diam., 10 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T41S R4E

$$\frac{1}{4} \frac{S 7}{S18}$$

1965

Desc. 100 ft. over W. slope.

50.00 Bottom of canyon, drains S., also bulldozed road in canyon bottom, asc. 350 ft. over ledgy E. slope.

60.34 W. rim of same canyon, bears N. and S., thence over rolling mountain top.

72.30 Bulldozed road, bears N. 30° E. and S. 30° W.

77.00 Intersect the W. bdy. of the Tp.

Point for the closing cor. of secs. 7 and 18.

Set an iron post 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T41S

R4E

$$\begin{array}{l|l} T41S & \\ R3E & \frac{S 7 C}{S18 C} \end{array}$$

1965

Raised mound of stone 3 ft. base, 2½ ft. high, E. of corner.

From this cor. the cor. of secs. 12 and 13, T. 41 S., R. 3 E., bears North 4.89 chs. dist., marked by an iron post 2½ ins. diam., set, mkd. and witnessed as recorded in the survey of the E. bdy. of T. 41 S., R. 3 E., in 1958.

Portion of the Subdivision of T. 41 S., R. 4 E.

CRABBS

Land, rolling on mountain top, broken in canyon.
Soil, sand and exposed sandstone.
Timber, scattered juniper and pinon.
Undergrowth, black brush and bunch grass.

Point for the W. $\frac{1}{2}$ sec. cor. of sec. 18, on the W. bdy. of the Tp. and midpoint bet. the closing cor. of secs. 18 and 19, and the closing cor. of secs. 7 and 18.

Set an iron post 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 8 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T41S

S4E

 $\frac{1}{2}$

S18

1965

From this cor. the E. $\frac{1}{2}$ sec. cor. of sec. 14, T. 41 S., R. 3 E., bears North 89° 55' east, dist. 1 mi., marked by an iron post 2 $\frac{1}{2}$ ins. diam., set, mkd. and witnessed as recorded in the survey of the E. bdy. of T. 41 S., R. 3 E., in 1958.

From the cor. of secs. 7, 8, 17 and 18

N. 10° 15' W., 100 ft. to cor. of E.

Over rolling, sandy top of mks. Mt., on gentle SW. slope.

18.00 Cor. of sec. 14, bears E. and W., 100 ft. to cor. N. slope.

20.00 same as above, 100 ft. to cor. W.

22.00 Middle of sec. 14, sandy bottom, bears E. and W., 100 ft. to cor. E. slope.

24.00 Point for the E. sec. cor. of secs. 7 and 8, falls on N. rim of canyon and can't be monumented. Canyon rim bears E. and W., over gentle SW. slope.

26.00 Point selected for the without $\frac{1}{2}$ sec. cor. of secs. 7 and 8

Set an iron post 30 ins. long, 2 $\frac{1}{2}$ ins. diam., on solid sandstone, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T41S R4E

 $\frac{1}{2}$ S7 $\frac{1}{2}$ S8

W18

1965

Asc. 80 ft. over gentle SW. slope, through pinon and juniper.

80.00 Point for the cor. of secs. 5, 6, 7 and 8.

Set an iron post 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 6 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.

Portion of the Subdivision of T. 41 S., R. 4 E.

CHAINS

T41S R4E

$$\frac{S6}{S7} \mid \frac{S5}{S8}$$

1965

Land, rolling on mountain, broken in canyon.
Soil, sand and exposed sandstone.
Timber, scattered juniper and pinon.
Undergrowth, shadscale and bunch grass.

From the cor. of secs. 4, 5, 8 and 9.

S. 89°50' W., bet. secs. 5 and 8.

Over rolling land on top of Smoky Mt., asc. 130 ft. over E. slope, through pinon and juniper.

40.09 Point for the $\frac{1}{2}$ sec. cor. of secs. 5 and 8.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T41S R4E

$$\frac{1}{2} \frac{S 5}{S 8}$$

1965

Asc. 5 ft. over gentle E. slope.

44.60 Top of ascent, bears N. and S., desc. 30 ft. over gentle W. slope.

70.50 Graded dirt road, Escalante to Glen City, bears N. 37° W. and S. 37° E.

80.18 The cor. of secs. 5, 6, 7 and 8.

Land, rolling mountain.
Soil, sand and exposed sandstone.
Timber, scattered juniper and pinon.
Undergrowth, black brush and bunch grass

West, bet. secs. 6 and 7.

Over rolling land on top of Smoky Mt., through pinon and juniper, desc. 75 ft. over general W. slope.

40.00 Point for the $\frac{1}{2}$ sec. cor. of secs. 6 and 7.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 8 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T41S R4E

$$\frac{1}{2} \frac{S 6}{S 7}$$

1965

Desc. 10 ft. over W. slope.

43.40 Bottom of head of canyon, about 40 ft. deep, drains S., asc. 40 ft. over gentle E. slope.

55.90 Bulldozed road on crest of rise, bears N. 15° W. and S. 15° E., desc. 50 ft. over W. slope.

Portion of the Subdivision of T. 41 S., R. 4 E.

CHAINS

76.90

Intersect the W. bdy. of the Tp.

Point for the closing cor. of secs. 6 and 7.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground, in a collar of stone, with brass cap mkd.

	T41S	
	R4E	
T41S	S 6	C
R3E	S 7	C

1965

From this cor. the cor. of secs. 1 and 12, T. 41 S., R. 3 E., bears North 4.86 chs. dist., marked by an iron post $2\frac{1}{2}$ ins. diam., set, mkd. and witnessed as recorded in the survey of the E. bdy. of T. 41 S., R. 3 E., in 1958.

Land, rolling mountain top.

Soil, sand and exposed sandstone.

Timber, scattered juniper and pinon.

Undergrowth, black brush and bunch grass.

Point for the W. $\frac{1}{2}$ sec. cor. of sec. 7, on the W. bdy. of the Tp. and midpoint bet. the closing cor. of secs. 7 and 18, and the closing cor. of secs. 6 and 7.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 22 ins. in the ground, in a collar of stone, with brass cap mkd.

	T41S	
	R4E	
	$\frac{1}{2}$	
	S 7	

1965

From this cor. the E. $\frac{1}{2}$ sec. cor. of sec. 12, T. 41 S., R. 3 E., bears North 4.875 chs. dist., marked by an iron post $2\frac{1}{2}$ ins. diam., set, mkd. and witnessed as recorded in the survey of the E. bdy. of T. 41 S., R. 3 E., in 1958.

Point for the W. $\frac{1}{2}$ sec. cor. of sec. 6, on the W. bdy. of the Tp. at 40.00 chs. Northing from the closing cor. of secs. 6 and 7.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground, in a collar of stone, with brass cap mkd.

	T41S	
	R4E	
	$\frac{1}{2}$	
	S 6	

1965

From this cor. the E. $\frac{1}{2}$ sec. cor. of sec. 1, T. 41 S., R. 3 E., bears North 4.86 chs. dist., marked by an iron post $2\frac{1}{2}$ ins. diam., set, mkd. and witnessed as recorded in the survey of the E. bdy. of T. 41 S., R. 3 E., in 1958.

Portion of the Subdivision of T. 41 S., R. 4 E

CHAINS

Point for the 80 1/16 sec. cor. of sec. 6, on the W. bdy. of the Tp. and 80.00 chs. northing from the closing cor. of secs. 6 and 7.

Set an iron post 30 ins. long, 2½ ins. diam., on solid sandstone, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T41S
R4E

1/16
S 6
80

1965

From this cor. the closing cor. of T. 41 S., Rs. 3 and 4 E., bears North 10.98 chs. dist., marked by an iron post 2½ ins. diam., set, mkd. and witnessed as recorded in the survey of the E. bdy. of T. 41 S., R. 3 E., in 1958.

From the cor. of secs. 5, 6, 7 and 8.

N. 0°03' W., bet. secs. 5 and 6.

Over rolling land on top of Smoky Mt., through scattered juniper and pinon, asc. 50 ft. over gentle SW. slope.

12.30 Graded dirt road, Escalante to Glen City, bears N. 33° W. and S. 33° E.

40.00 Point for the ¼ sec. cor. of secs. 5 and 6.

Set an iron post 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T41S R4E

¼
S6 | S5

1965

Raised mound of stone 3 ft. base, 2½ ft. high, W. of corner.

Asc. 10 ft. over gentle SW. slope.

46.10 Crest of gentle rise, bears NW. and SE., desc. 100 ft. over gentle NE. slope.

80.00 Point for the 1/16 sec. cor. of secs. 5 and 6.

Set an iron post 30 ins. long, 2½ ins. diam., on solid sandstone, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T41S R4E

1/16
S6 | S5

80

1965

Desc. gentle NE. slope.

90.92 Intersect the N. bdy. of the Tp. (Eighth Standard Parallel South).

Portion of the Subdivision of T. 41 S., R. 4 E.

CHAINS

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T40S R4E

S6	S5
----	----

C | C

T41S R4E

1965

From this cor., the standard cor. of secs. 31 and 32, T. 40 S., R. 4 E., bears East 5.10 chs. dist., marked by an iron post $2\frac{1}{2}$ ins. diam., set, mkd. and witnessed as recorded in the survey of the Eighth Standard Parallel South, in 1958.

Land, rolling mountain top.

Soil, sand and exposed sandstone.

Timber, scattered juniper and pinon.

Undergrowth, shadscale and bunch grass.

Point for the N. $\frac{1}{4}$ sec. cor. of sec. 5, on the N. bdy. of the Tp. and midpoint bet. the closing cor. of secs. 4 and 5, and the closing cor. of secs. 5 and 6.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., on solid sandstone, in a mound of stone, 4 ft. base to top, with brass cap mkd.

$\frac{1}{2}$	S5
---------------	----

T41S R4E

1965

From this cor., the true point for the standard $\frac{1}{4}$ sec. cor. of sec. 32, T. 40 S., R. 4 E., bears East 4.955 chs. dist., from which its witness cor. bears East 0.85 chs. dist., marked by an iron post $2\frac{1}{2}$ ins. diam., set, mkd. and witnessed as recorded in the survey of the Eighth Standard Parallel South, in 1958.

Point for the N. $\frac{1}{4}$ sec. cor. of sec. 6, on the N. bdy. of the Tp. at 40.00 chs. westing from the closing cor. of secs. 5 and 6.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 22 ins. in the ground, with brass cap mkd.

$\frac{1}{2}$	S6
---------------	----

T41S R4E

1965

From this cor., the standard $\frac{1}{4}$ sec. cor. of sec. 31, T. 40 S., R. 4 E., bears East 5.10 chs. dist., marked by an iron post $2\frac{1}{2}$ ins. diam., set, mkd. and witnessed as recorded in the survey of the Eighth Standard Parallel South, in 1958.

Portion of the Subdivision of T. 41 S., R. 4 E.

CHAINS

General Description

T. 41 S., R. 4 E. consists of mountainous desert land of Smoky Mountain, located about 20 miles NE. of Glen City, Utah. Access to the township is by a graded dirt road from Glen City, Utah to Escalante, Utah. This road enters the township on the S. bdy. of sec. 34, bears irregularly NW. across the top of Smoky Mountain, and leaves the township on the N. bdy. of sec. 6. There are several bulldozed spurs leaving this road, both east and west, having been used for recent coal exploration within the township.

The only permanent water noted during the survey was several seeps in the bottom of Water Canyon.

The elevation varies from about 4200 to 5600 feet above sea level.

There is no permanent habitation within the township.

CERTIFICATE OF SURVEY

I, **CRAIG P. SYLVESTER**, HEREBY CERTIFY upon honor that,
 in pursuance of special instructions bearing date of the 30th day of **April**, 19 **65**,
 I have surveyed a portion of the subdivisional lines completing the sub-
 division of Township 41 South, Range 4 East,

of the **Salt Lake** Meridian, in the State of **Utah**, which
 are represented in the foregoing field notes as having been executed by me and under my direction;
 and that said survey has been made in strict conformity with said special instructions, the Manual
 of Instructions for the Survey of the Public Lands of the United States, and in specific manner
 described in the foregoing field notes.

May 11, 1966
 (Date)

 (Date)

Craig P. Sylvester
~~Cadastral Surveyor~~
 Supervisory Cadastral Surveyor

 (Cadastral Surveyor)

CERTIFICATE OF APPROVAL

SUBMITTED FOR APPROVAL
 Date FEB 16 1967

BUREAU OF LAND MANAGEMENT,
 Washington, D. C.

The foregoing field notes of the survey of a portion of the subdivisional lines
 completing the subdivision of Township 41 South, Range 4 East, Salt Lake
 Meridian, Utah

executed by **Craig P. Sylvester**, Supervisory Cadastral Surveyor,
 having been critically examined and found correct, are hereby approved.

SPR 5

 (Date)

E. R. Livingston
 (Chief, Division of Engineering)

CERTIFICATE OF TRANSCRIPT

The foregoing field notes of the survey of a portion of the subdivisional lines
 completing the subdivision of Township 41 South, Range 4 East, Salt Lake
 Meridian, Utah, is a true copy of the original field notes.

 (Date)

 (Date)

Blank

Page

Blank

Page

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
ORIGINAL

FIELD NOTES

OF THE SURVEY OF

A PORTION OF THE SUBDIVISIONAL LINES

COMPLETING THE SUBDIVISION OF

TOWNSHIP 40 SOUTH, RANGE 7 EAST

1967 MAY 1 AM 11 43 A
BUREAU OF LAND MANAGEMENT
SALT LAKE CITY, UTAH

Of the SALT LAKE Meridian,

In the State of UTAH

EXECUTED BY

CRAIG P. SYLVESTER

SUPERVISORY CADASTRAL SURVEYOR

Under special instructions dated OCTOBER 15, 19 64, which provided for the surveys
included under Group Number 476, approved OCTOBER 15, 1964,
and assignment instructions dated NOVEMBER 2, 19 64.

Survey commenced SEPTEMBER 22, 19 65

Survey completed NOVEMBER 11, 19 65

INDEX DIAGRAM

Township 40 SOUTH, Range 7 EAST,

6 28	5 19	4	8	2	1
28	27	18	14		6
7 26	8 17	9	10 14	11 5	12
25	25		13	13	5
18 24	17	16	15 12	14 4	13
23	23		11	11	3
19 22	20 17	21	22 10	23 2	24
21	21	16	9	9	2
30 20	29 16	28	27 8	26 1	25
19		15	8	7	
31	32	33	34 6	35	36

Survey of a Portion of the Subdivision of T. 40 S., R. 7 E.

CHAINS

The north, south, east and west boundaries and a portion of the subdivisional lines were surveyed by Vern E. Lane et. al., in 1958.

The following field notes are those of a survey of the unsurveyed subdivisional lines of T. 40 S., R. 7 E.

The survey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1947, and the Special Instructions dated October 15, 1964.

Corners on the east-west lines were set on the true latitudinal curve. Lines connecting previously established corners were run by random and true methods, but for simplification of the record, the random lines are omitted from these field notes.

All lines of this survey were run by direct method where lines were accessible; lines inaccessible were run by traverse or triangulation method. Distances to topography on lines run by traverse and triangulation methods are as scaled from Bureau of Land Management maps. The details of such traverses and triangulations have been thoroughly checked and verified, and in order to simplify the records, the diagrams and reductions are omitted from these field notes.

The direction of the lines of this survey were determined by reference to true meridians established on line by altitude observations on the sun. The lines were carried forward by sustained angulation being supplemented by other numerous altitude observations on the sun taken throughout the progress of the survey.

The geographic position for the southeast corner of the township is at latitude 37° 16' 57.73" N. and longitude 111° 05' 18.78" W. as recorded in the partial survey of the township, in 1958.

The magnetic declination was read at a number of stations throughout the township and the average of the several readings was found to be 15° 15' E.

Beginning at the cor. of secs. 25, 26, 35 and 36, an iron post 2½ ins. diam., set, mkd. and witnessed as described in the official record of surveys, in 1958.

N. 0° 01' W., bet. secs. 25 and 26.

Over broken land, through bushes and scrub timber, desc. about 200 ft. over ledgy NE. slope of Fifty Mile Mtn.

11.00 Base of steep descent, bears NW. and SE., desc. 20 ft. over broken bench, draining E.

18.00 Unimproved road, bears NW. and SE. irregular, desc. 150 ft. over broken bench.

40.00 Point for the 1/4 sec. cor. of secs. 25 and 26.

Set an iron post 30 ins. long, 2½ ins. diam., 15 ins. in the ground, in a mound of stone, 4 ft. base, to top, with brass cap mkd.

T40S R7E

↓
S26 S25
1965

Survey of a Portion of the Subdivision of T. 40 S., R. 7 E.

CHAINS

Desc. 100 ft. over broken bench, draining NE.

58.00 Low rim, bears E. and W., desc. 80 ft. over NE. slope.

80.00 Point for the cor. of secs. 23, 24, 25 and 26.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 8 ins. in the ground, in a mound of stone, 4 ft. base, to top, with brass cap mkd.

T40S R7E

S23	S24
S26	S25

1965

Land, broken mountain.
Soil, sandy and rocky.
Timber, scrub juniper and pinon.
Undergrowth, scattered bushes and shadscale.

From the true point for the cor. of secs. 19, 24, 25 and 30, on the E. bdy., from which its witness cor. bears North 9.60 chs., marked by an iron post $2\frac{1}{2}$ ins. diam., set, mkd. and witnessed as described in the official record.

N. $89^{\circ} 57'$ W., bet. secs. 24 and 25.

Over broken and ledgy land, asc. about 400 ft. over inaccessible SE. slope.

24.60 Spur, slopes NE., asc. 40 ft. over broken bench, draining NE., through scrub timber.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 24 and 25.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 8 ins. in the ground, to bedrock, in a mound of stone, $3\frac{1}{2}$ ft. base, to top, with brass cap mkd.

T40S R7E

$\frac{1}{2}$	S24
	S25

1965

Asc. 80 ft. over broken bench, draining NE.

49.40 Spur, slopes NE., desc. 80 ft. over NW. slope.

61.00 Wash, 10 lks. wide, 2 ft. deep, drains NE., asc. 75 ft. over NW. slope.

67.90 Slope changes, desc. 10 ft. along N. slope.

80.00 The cor. of secs. 23, 24, 25 and 26.

Land, broken mountain.
Soil, sand and exposed sandstone.
Timber, scrub pinon and juniper.
Undergrowth, scattered bushes and black brush.

N. $0^{\circ} 01'$ W., bet. secs. 23 and 24.

Over broken bench land, on E. slopes of Fifty Mile Mtn., through scrub timber, desc. 45 ft. over N. slope.

Survey of a Portion of the Subdivision of T. 40 S., R. 7 E.

CHAINS	
6.30	Wash, 3 ft. deep, 20 lks. wide, drains NE., desc. 40 ft. over broken bench, draining NE.
22.00	Crest of steep and ledgy descent, bears NW. and SE. irregular, desc. 600 ft. over ledges facing N. and steep N. slope.
40.00	Point for the 1/4 sec. cor. of secs. 23 and 24. Set an iron post 30 ins. long, 2½ ins. diam., 18 ins. in the ground, in a mound of stone 3 ft. base, to top, with brass cap mkd.
	T40S R7E ½ S23 S24 1965
	Cor. falls near base of ledges. Desc. 190 ft. over steep and rocky N. slope, into ravine.
44.40	Left Fork of Carcass Wash, drains E., asc. 200 ft. over rocky S. slope.
49.10	High spur, slopes E., desc. 200 ft. over broken NE. slope, over series of spurs and gullys draining E.
58.10	Spur, slopes NE.
64.20	Wash, 2 ft. deep, 10 lks. wide, drains NE.
75.50	Wash, 3 ft. deep, 15 lks. wide, drains NE.
80.00	Point for the cor. of secs. 13, 14, 23 and 24. Set an iron post 30 ins. long, 2½ ins. diam., on solid sandstone, over an X, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.
	T40S R7E S14 S13 S23 S24 1965
	Land, broken and ledgy. Soil, sand and exposed sandstone. Timber, scrub pinon and juniper on high bench. Undergrowth, black brush with scattered bushes on bench.
	From the cor. of secs. 13, 18, 19 and 24, on the E. bdy., marked by an iron post 2½ ins. diam., set, mkd. and witnessed as described in the official record.
	S. 89° 58' W., bet. secs. 13 and 24. Over rolling sandy desert land, draining NE.
30.00	Left Fork of Carcass Wash, 20 ft. deep, 50 lks. wide, drains NE., asc. 40 ft. over NE. slope.
39.98	Point for the 1/4 sec. cor. of secs. 13 and 24. Set an iron post 30 ins. long, 2½ ins. diam., 20 ins. in the ground, in a collar of stone, with brass cap mkd.

Survey of a Portion of the Subdivision of T. 40 S., R. 7 E.

CHAINS

T40S R7E

$$\frac{1}{4} \frac{S13}{S24}$$
 1965

Asc. 50 ft. over general NE. slope.

72.00 Wash, 2 ft. deep, 15 lks. wide, drains NE,

79.96 The cor. of secs. 13, 14, 23 and 24.

Land, rolling to broken.
Soil, sand and exposed sandstone.
Timber, none.
Undergrowth, black brush.

N. 0° 01' W., bet. secs. 13 and 14.

Over broken land, draining E.

9.00 S. rim of hollow, bears E. and W., desc. 110 ft. over hollow.

11.60 Right Fork of Carcass Wash in hollow, drains E., asc. 90 ft. over S. slope.

14.20 N. rim same hollow, bears E. and W., desc. 70 ft. along E. slope.

20.00 Bulldozed road, bears E. and W.

40.00 Point for the 1/4 sec. cor. of secs. 13 and 14.

Set an iron post 30 ins. long, 2½ ins. diam., 22 ins. in the ground., in a collar of stone, with brass cap mkd.

T40S R7E

$$\frac{1}{4} \frac{S14|S13}{S14|S13}$$
 1965

Desc. 80 ft. along broken E. slope.

52.00 Wash, 3 ft. deep, 15 lks. wide, drains E.

60.50 Wash, 3 ft. deep, 20 lks. wide, drains E.

77.00 Wash, 2 ft. deep, 10 lks. wide, drains NE.

80.00 Point for the cor. of secs. 11, 12, 13 and 14.

Set an iron post 30 ins. long, 2½ ins. diam., 16 ins. in the ground, in a mound of stone, 3½ ft. base, to top, with brass cap mkd.

T40S R7E

$$\frac{S11|S12}{S14|S13}$$

1965

Land, broken.
Soil, sand and exposed sandstone.
Timber, none.
Undergrowth, black brush.

Survey of a Portion of the Subdivision of T. 40 S., R. 7 E.

CHAINS	
	<p>From the cor. of secs. 7, 12, 13 and 18, on the E. bdy., marked by an iron post 2½ ins. diam., set, mkd. and witnessed as described in the official record of the survey of the E. bdy.</p> <p>West, bet. secs. 12 and 13.</p> <p>Over rolling desert land, draining E.</p>
16.80	Graded dirt road, Escalante to Hole in Rock, bears NW. and curves E., asc. 10 ft. over gentle E. slope.
26.40	Small wash, drains NE.
38.20	Small wash, drains N. 80° E.
39.99	<p>Point for the 1/4 sec. cor. of secs. 12 and 13.</p> <p>Set an iron post 30 ins. long, 2½ ins. diam., 20 ins. in the ground, in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T40S R7E ½ S12 S13 1965</p>
	Asc. 140 ft. over gentle NE. slope.
61.90	Bulldozed road, bears N. and S.
64.60	Wash, 2 ft. deep, 15 lks. wide, drains NE.
72.90	Wash, 2 ft. deep, 20 lks. wide, drains NE.
79.98	<p>The cor. of secs. 11, 12, 13 and 14.</p> <p>Land, rolling. Soil, sand and exposed sandstone. Timber, none. Undergrowth, black brush.</p>
	<p>N. 0° 02' W., bet. secs. 11 and 12.</p> <p>Over broken land, draining E.</p>
3.70	Small wash, drains E., desc. 65 ft. along E. slope.
19.90	Wash, 2 ft. deep, 20 lks. wide, drains E., desc. 50 ft. along E. slope.
28.00	Left Fork of Forty Mile Gulch, drains E., desc. 50 ft. along E. slope.
37.20	Wash, 4 ft. deep, 30 lks. wide, drains E.
39.98	<p>Point for the 1/4 sec. cor. of secs. 11 and 12.</p> <p>Set an iron post 30 ins. long, 2½ ins. diam., on solid sandstone, over an X, in a mound of stone 4 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T40S R7E ½ S11 S12 1965</p>

Survey of a Portion of the Subdivision of T. 40 S., R. 7 E.

CHAINS

- Asc. 30 ft. along E. slope.
- 58.10 Bulldozed road, bears E. and W., asc. 110 ft. over S. slope of small hill.
- 63.20 Low hill, bears E. and W., desc. 130 ft. over N. slope of hill.
- 72.10 Wash, 3 ft. deep, 50 lks. wide, drains NE., asc. 15 ft. along E. slope.
- 78.10 Small wash, drains E., cont. along E. slope.
- 79.96 The cor. of secs. 1, 2, 11 and 12, marked by an iron post 2½ ins. diam., set, mkd. and witnessed as described in the official record.
- Land, rolling to broken.
Soil, sand and exposed sandstone.
Timber, none.
Undergrowth, black brush.
-
- From the cor. of secs. 1, 6, 7 and 12, on the E. bdy., marked by an iron post 2½ ins. diam., set, mkd. and witnessed as described in the official record.
- N. 89° 59' W., bet. secs. 1 and 12.
- Over irregular sandstone formation, draining S.
- 39.98 Point for the 1/4 sec. cor. of secs. 1 and 12.
- Set an iron post 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
- T40S R7E
½ $\frac{S1}{S12}$
1965
- Raised mound of stone 3 ft. base, 2 ft. high N. of corner.
- Continue over irregular sandstone formation.
- 40.20 Slope changes, desc. 35 ft. over gentle SW. slope.
- 58.90 Right Fork of Forty Mile Gulch, drains SE.
- 60.90 Graded dirt road, Escalante to Hole in Rock, bears N. 10° E. and S. 10° W., asc. 100 ft. over general E. slope, along N. side of wash.
- 79.96 The cor. of secs. 1, 2, 11 and 12, previously described.
- Land, rolling to broken.
Soil, sand and exposed sandstone.
Timber, none.
Undergrowth, black brush.
-
- From the standard corner of secs. 34 and 35, on the S. bdy., marked by an iron post 2½ ins. diam., set, mkd. and witnessed as described in the official record.
- N. 0° 01' W., bet. secs. 34 and 35.

Survey of a Portion of the Subdivision of T. 40 S., R. 7 E.

CHAINS

Over mountain land on top of Fifty Mile Mtn., through sage brush and scattered juniper, desc. 115 ft. over N. slope of small hollow.

19.40 Lake Canyon, drains E., asc. 75 ft. over SW. slope.

31.10 Low spur, slopes W., desc. 35 ft. over NW. slope.

36.90 Swale, drains S. 10° W., asc. 35 ft. over SE. slope.

40.00 Point for the $\frac{1}{2}$ sec. cor. of secs. 34 and 35.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins. in the ground, in a mound of stone, 4 ft. base, to top, with brass cap mkd.

T40S R7E

$\frac{1}{2}$

S34|S35

1965

Asc. 65 ft. over rocky SE. slope.

50.00 Enter rolling bench, covered with dense sage brush.

80.00 Point for the cor. of secs. 26, 27, 34 and 35.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T40S R7E

$\frac{S27|S26}{S34|S35}$

1965

Corner falls in small grove of oak brush.

Land, mountainous.

Soil, sandy with exposed sandstone.

Timber, scrub juniper.

Undergrowth, sage and oak brush.

From the cor. of secs. 25, 26, 35 and 36, previously described.

West, bet. secs. 26 and 35.

Over broken land on E. breaks of Fifty Mile Mtn., asc. 660 f. over ledgy NE. slope of Straight Cliffs.

16.80 E. rim of Fifty Mile Mtn., bears NW. and SE., desc. 20 ft. over rolling land on mountain top.

39.98 Point for the $\frac{1}{2}$ sec. cor. of secs. 26 and 35.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T40S R7E

$\frac{1}{2} \frac{S26}{S35}$

1965

No accessories available.

Asc. 20 ft. over rolling mountain top, through sage and oak brush.

Survey of a Portion of the Subdivision of T. 40 S., R. 7 E.

CHAINS 79.96	The cor. of secs. 26, 27, 34 and 35.
	Land, broken E. portion, rolling W. portion. Soil, rocky E. portion, sandy W. portion. Timber, scrub juniper. Undergrowth, sage and oak brush.
	S. 89°59' W., bet. secs. 27 and 34.
	Over rolling top of Fifty Mile Mtn., through sage and oak brush.
40.01	Point for the $\frac{1}{4}$ sec. cor. of secs. 27 and 34.
	Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, in a collar of stone, with brass cap mkd.
	T40S R7E
	$\frac{1}{4} \frac{S27}{S34}$
	1965
	Desc. 60 ft. over rolling mountain top.
69.20	Descent becomes steeper, desc. 60 ft. over W. slope, across barren sandstone.
72.40	Bottom of swale, drains S., asc. 60 ft. over E. slope.
80.02	The cor. of secs. 27, 28, 33 and 34, marked by an iron post, $2\frac{1}{2}$ ins. diam., set, mkd. and witnessed as described in the official record.
	Land, rolling. Soil, sand and exposed sandstone. Timber, scattered juniper. Undergrowth, sage and oak brush.
	From the cor. of secs. 26, 27, 34 and 35.
	N. 0°01' W., bet. secs. 26 and 27.
	Over rolling land on top of Fifty Mile Mtn., through sage and oak brush.
35.00	Enter scrub juniper and pinion.
39.80	Rim of Fifty Mile Mtn., bears NW. and SE., desc. 10 ft. over steep NE. slope.
40.00	Point for the $\frac{1}{4}$ sec. cor. of secs. 26 and 27.
	Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., on solid bedrock, in a mound of stone 4 ft. base, to top, with brass cap mkd.
	T40S R7E
	$\frac{1}{4}$
	S27 S26
	1965
	Desc. 800 ft. over ledgy NE. slope of Straight Cliffs of Fifty Mile Mtn. By triangulation with topography scaled from Bureau of Land Management maps.

Survey of a Portion of the Subdivision of T. 40 S., R. 7 E.

CHAINS	
60.00	Base of Straight Cliffs, bears NW. and SE., desc. 50 ft. over bench draining NE.
70.00	Bulldozed road, bears NW. and SE.
80.00	<p>Point for the cor. of secs. 22, 23, 26 and 27.</p> <p>Set an iron post 30 ins. long, 2½ ins. diam., 8 ins. in the ground, in a mound of stone 4 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T40S R7E $\frac{S22}{S27} \frac{S23}{S26}$ 1965</p> <p>Cor. falls 50 lks. W. of small draw.</p> <p>Land, rolling S. portion, broken N. portion. Soil, sand and exposed sandstone. Timber; scrub juniper and pinon. Undergrowth, sage and oak brush.</p>
30.00	<p>From the cor. of secs. 23, 24, 25 and 26.</p> <p>S. 89° 56' W., bet. secs. 23 and 26.</p> <p>Over broken land on E. bench of Fifty Mile Mtn., through scrub timber, asc. 80 ft. over general NE. slope.</p>
40.00	<p>Small ravine, drains NE., asc. 50 ft. over NE. slope.</p> <p>Point for the 1/4 sec. cor. of secs. 23 and 26.</p> <p>Set an iron post 30 ins. long, 2½ ins. diam., 15 ins. in the ground, in a mound of stone 3 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T40S R7E $\frac{1}{4} \frac{S23}{S26}$ 1965</p> <p>Asc. 125 ft. over SW. slope of spur.</p>
50.50	Bulldozed road, bears NE. and SW.
51.70	Spur, slopes NE., desc. 55 ft. over NW. slope.
62.20	Head of small draw, drains NE., asc. 85 ft. over NE. slope.
78.20	Small draw, drains NE., asc. 30 ft. over E. slope.
80.00	<p>The cor. of secs. 22, 23, 26 and 27.</p> <p>Land, broken mountain. Soil, sandy clay and rocky. Timber, scrub juniper and pinon. Undergrowth, black brush and bunch grass.</p>
6.00	<p>N. 89° 58' W., bet. secs. 22 and 27.</p> <p>Over broken bench land on E. breaks of Fifty Mile Mtn., through scrub timber, asc. 30 ft. over NE. slope.</p> <p>Bulldozed road, bears NW. and SE.</p>

Survey of a Portion of the Subdivision of T. 40 S. R. 7 E

CHAINS

- 10.00 Base of Straight Cliffs of Fifty Mile Mtn., bears NW. and SE., asc. 800 ft. over ledgy NE. slope. By triangulation.
- 34.30 Crest of Straight Cliffs, bears NW. and SE., asc. 10 ft. over E. slope, on Fifty Mile Mtn.
- 40.02 Point for the 1/4 sec. cor. of secs. 22 and 27.
- Set an iron post 30 ins. long, 2½ ins. diam., 20 ins. in the ground, in a collar of stone, with brass cap mkd.

T40S R7E

$$\frac{1}{4} \frac{S22}{S27}$$

1965

Asc. 125 ft. over general E. slope, on mountain top.

- 62.40 Crest of ascent, bears N. and S., desc. 85 ft. over gentle W. slope.
- 80.04 The cor. of secs. 21, 22, 27 and 28, marked by an iron post 2½ ins. diam., set, mkd. and witnessed as described in the official record, in 1958.

Land, broken.
Soil, sand and exposed sandstone.
Timber, scrub juniper and pinon.
Undergrowth, sagebrush.

From the cor. of secs. 22, 23, 26 and 27.

N. 0° 01' W., bet. secs. 22 and 23.

Over broken bench land, through scrub timber, desc. 240 ft. over NE. slope.

- 12.00 Small ravine, drains NE.
- 40.00 Point for the 1/4 sec. cor. of secs. 22 and 23.
- Set an iron post 20 ins. long, 2½ ins. diam., 10 ins. in the ground, in a mound of stone 4 ft. base, to top, with brass cap mkd.

T40S R7E

$$\frac{1}{4} \frac{S22}{S23}$$

1965

Desc. 100 ft. over broken NE. slope.

- 48.00 Crest of steep ledgy descent, bears E. and W., desc. 300 ft. over ledgy N. slope of ravine. By triangulation, topography estimated.
- 60.00 Right Fork of Carcass Wash, drains E., asc. 300 ft. over steep and ledgy S. slope.
- 70.00 N. rim same ravine, bears E. and W., asc. 80 ft. over steep SE. slope.
- 80.00 Point for the cor. of secs. 14, 15, 22 and 23.
- Set an iron post 30 ins. long, 2½ ins. diam., 12 ins. in the ground, in a mound of stone 4 ft. base, to top, with brass cap mkd.

Survey of a Portion of the Subdivision of T. 40 S., R. 7 E.

CHAINS

T40S R7E

S15	S14
S22	S23

1965

Land, broken.
Soil, sandy clay with exposed sandstone.
Timber, scrub juniper and pinon.
Undergrowth, black brush and bunch grass.

From the cor. of secs. 13, 14, 23 and 24.

S. 89° 54' W., bet. secs. 14 and 23.

Over broken land of E. breaks of Fifty Mile Mtn., through scrub timber asc. about 200 ft. over ledgy E. slope. By triangulation, topography estimated.

- 11.50 Right Fork of Carcass Wash, drains irregularly NE.
- 35.00 Base of vertical ledges in ravine, bears NE. and SW., asc. 500 ft. over ledges facing SE.
- 40.03 Point for the 1/4 sec. cor. of secs. 14 and 23, falls on ledges facing SE. and cannot be monumented.
- 43.00 Crest of same ledges, bears NE. and SW., asc. 50 ft. over steep SE. slope.
- 43.93 Point selected for the witness 1/4 sec. cor. of secs. 14 and 23.

Set an iron post 30 ins. long, 2½ ins. diam., 12 ins. in the ground, in a mound of stone, 4 ft. base, to top, with brass cap mkd.

T40S R7E

S14	WC
S23	

1965

Asc. 400 ft. over irregular E. slope. End triangulation.

- 80.06 The cor. of secs. 14, 15, 22 and 23.

Land, very broken and ledgy.
Soil, sand and exposed sandstone.
Timber, scrub pinon and juniper.
Undergrowth, black brush.

N. 89° 55' W., bet. secs. 15 and 22.

Over broken land on E. breaks of Fifty Mile Mtn., through scrub timber, asc. 350 ft. over SE. slope.

- 26.30 Slope changes, asc. 60 ft. over E. slope.
- 27.60 Bulldozed road, bears NW. and SE.
- 40.01 Point for the 1/4 sec. cor. of secs. 15 and 22.

Set an iron post 30 ins. long, 2½ ins. diam., 18 ins. in the ground, in a collar of stone, with brass cap mkd.

Survey of a Portion of the Subdivision of T. 40 S., R. 7 E.

CHAINS

T40S R7E

 $\frac{1}{4}$ S15
S22

1965

- Asc. 200 ft. over E. slope.
- 53.50 Base of Straight Cliffs, bears NW. and SE. irregular, asc. 800 ft. over series of ledges facing NE. By triangulation.
- 74.80 Crest of same ledges, bears NW. and SE., desc. 60 ft. over NW. slope on Fifty Mile Mtn.
- 80.02 The cor. of secs. 15, 16, 21 and 22, marked by an iron post $2\frac{1}{2}$ ins. diam., set, mkd. and witnessed as described in the official record.
- Land, broken.
Soil, sand and exposed sandstone.
Timber, scrub juniper and pinon.
Undergrowth, black brush and scattered oak brush on Mtn. top.
- From the cor. of secs. 14, 15, 22 and 23.
- N. 0° Q1' W., bet. secs. 14 and 15.
- Over broken land of E. breaks of Fifty Mile Mtn., through scrub timber, asc. 70 ft. over S. slope.
- 10.30 Bulldozed road, bears E. and SW., asc. 80 ft. over S. slope.
- 18.80 High spur, slopes E., desc. 30 ft. over N. slope, on spur.
- 24.30 Crest of steep and ledgy descent, bears E. and W., desc. 560 ft. over ledgy NE. slope.
- 40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 14 and 15.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 16 ins. in the ground, in a mound of stone, 3 ft. base, to top, with brass cap mkd.

T40S R7E

 $\frac{1}{4}$
S15|S14

1965

- Desc. 175 ft. over ledgy NE. slope. By triangulation, topography estimated.
- 44.00 Left Fork of Forty Mile Gulch, drains NE. irregular, asc 400 ft. over SE. slope.
- 50.00 Spur, slopes NE., desc. 400 ft. over NW. slope.
- 60.00 Bottom of deep ravine, drains NE., asc. 700 ft. over ledgy SE. slope.
- 80.00 Point for the cor. of secs. 10, 11, 14 and 15, falls on inaccessible ledges facing SE. and cannot be monumented.
- Witness corner hereinafter described.

Survey of a Portion of the Subdivision of T. 40 S., R. 7 E.

CHAINS	<p>Land, very broken. Soil, sand and exposed sandstone. Timber, scattered juniper and pinon. Undergrowth, black brush.</p>
	<p>From the cor. of secs. 11, 12, 13 and 14. S. 89° 57' W., bet. secs. 11 and 14.</p>
21.70	<p>Over rolling desert land, asc. 80 ft. over gentle E. slope.</p>
38.00	<p>Crest of low sandy spur, slopes NE., desc. 80 ft. over gentle NW. slope.</p>
40.05	<p>Left Fork of Forty Mile Gulch, drains NE., asc. 30 ft. over E. slope. Enter broken land.</p>
	<p>Point for the 1/4 sec. cor. of secs. 11 and 14.</p>
	<p>Set an iron post 30 ins. long, 2½ ins. diam., 18 ins. in the ground, in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p>
	<p style="text-align: center;">T40S R7E ½ $\frac{S11}{S14}$ 1965</p>
65.00	<p>Asc. 250 ft. over broken E. slope. By triangulation, topography estimated.</p>
80.10	<p>Base of ledges facing SE., asc. 600 ft. over ledgy SE. slope.</p>
	<p>True point for the cor. of secs. 10, 11, 14 and 15, from which its witness cor. bears N. 0° 06' E., 5.00 chs. dist.</p>
	<p>Land, rolling E. portion, broken W. portion. Soil, sand and exposed sandstone. Timber, scrub juniper on W. portion. Undergrowth, black brush and June grass.</p>
	<p>From the true point for the cor. of secs. 10, 11, 14 and 15, from which its witness cor. bears N. 0° 06' E., 5.00 chs. dist.</p>
	<p>N. 89° 54' W., bet. secs. 10 and 15.</p>
18.70	<p>Over broken land, asc. 300 ft. over inaccessible ledges facing SE. By triangulation, topography estimated.</p>
40.03	<p>Spur, slopes NE., asc. 50 ft. over general NE. slope.</p>
	<p>Point for the 1/4 sec. cor. of secs. 10 and 15.</p>
	<p>Set an iron post 30 ins. long, 2½ ins. diam., 15 ins. in the ground, in a mound of stone, 3 ft. base, to top, with brass cap mkd.</p>
	<p style="text-align: center;">T40S R7E ½ $\frac{S10}{S15}$ 1965</p>
68.00	<p>Asc. 50 ft. over NE. slope.</p>
73.20	<p>Wash in small hollow, drains NE., asc. 100 ft. over SE. slope.</p>
77.10	<p>Spur, slopes NE., desc. 25 ft. over NW. slope.</p>
	<p>Bulldozed road, bears N. and S.</p>

Survey of a Portion of the Subdivision of T. 40 S., R. 7 E.

CHAINS

- 78.50 Small wash, drains NE., asc. SE. slope.
- 80.06 The cor. of secs. 9, 10, 15 and 16, marked by an iron post 2½ ins. diam., set, mkd. and witnessed as described in the official record.

Land, broken.
Soil, sand and exposed sandstone.
Timber, scrub juniper and pinon.
Undergrowth, black brush and bunch grass.

From the true point for the cor. of secs. 10, 11, 14 and 15.

N. 0° 06' E., bet. secs. 10 and 11.

Over broken land on E. breaks of Fifty Mile Mtn., asc. 200 ft. over inaccessible ledges facing SE.

- 5.00 Point selected for the witness cor. of secs. 10, 11, 14 and 15.

Set an iron post 30 ins. long, 2½ ins. diam., on solid sandstone, in a mound of stone, 4 ft. base, to top, with brass cap mkd.

T40S R7E

S10|S11

S15|S14

W C

1965

Asc. 215 ft. over ledgy SE. slope.

- 14.80 Point, projects NE., desc. 600 ft. over ledgy N. slope. By triangulation, topography estimated.

- 40.09 Point for the 1/4 sec. cor. of secs. 10 and 11.

Set an iron post 30 ins. long, 2½ ins. diam., 18 ins. in the ground, in a mound of stone 4 ft. base, to top, with brass cap mkd.

T40S R7E

½
S10|S11

1965

From this corner U.S.G.S. Triangulation Station "SODA" in Latitude 37° 20' 46.251" N., Longitude 111° 07' 26.728" W., bears S. 24° 37' E., 6.98 chs. dist.

Desc. 475 ft. over ledgy N. slope.

- 64.20 Base of ledgy descent, E. and NW., thence over desert land, draining NE.

- 67.70 Right Fork of Forty Mile Gulch, drains NE.

- 80.18 The cor. of secs. 2, 3, 10 and 11, marked by an iron post 2½ ins. diam., set, mkd. and witnessed as described in the official record.

Land, broken.
Soil, sand and exposed sandstone.
Timber, scrub juniper on S. portion.
Undergrowth, black brush.

N. 89° 55' W., bet. secs. 3 and 10.

Over broken desert land covered with black brush, asc. 100 ft. over NE. slope.

Survey of a Portion of the Subdivision of T. 40 S., R. 7 E.

CHAINS

39.98

Point for the $\frac{1}{2}$ sec. cor. of secs. 3 and 10.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins. in the ground, in a mound of stone 4 ft. base, to top, with brass cap mkd.

T40S R7E

$$\frac{1}{4} \frac{S 3}{S10}$$

1965

Asc. 200 ft. over broken NE. slope.

51.00

Spur, slopes NE., desc. 150 ft. over W. slope.

65.00

Small hollow, drains NE., asc. 200 ft. over rocky E. slope.

79.96

The cor. of secs. 3, 4, 9 and 10, marked by an iron post $2\frac{1}{2}$ ins. diam., set, mkd. and witnessed as described in the official record.

Land, broken.

Soil, sand and exposed sandstone.

Timber, none.

Undergrowth.

From the cor. of secs. 27, 28, 33 and 34, previously described.

West, bet. secs. 28 and 33.

Over rolling land on Fifty Mile Mtn., through sage and oak brush and scattered timber, asc. 45 ft. over gentle E. slope.

34.20

Crest of low ridge, bears N. and S., desc. 30 ft. over steep W. slope, into W. breaks of Fifty Mile Mtn.

39.99

Point for the $\frac{1}{2}$ sec. cor. of secs. 28 and 33.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins. in the ground, in a collar of stone, with brass cap mkd.

T40S R7E

$$\frac{1}{4} \frac{S28}{S33}$$

1965

Desc. 200 ft. over broken W. slope. By triangulation, topography estimated.

48.00

Cove, drains SW., asc. 200 ft. over SE. slope.

59.40

High spur, slopes SW., desc. 200 ft. over ledgy NW. slope, into canyon.

78.00

Bottom of canyon, drains S., asc. 100 ft. over ledgy E. slope.

79.98

True point for the cor. of secs. 28, 29, 32 and 33, from which its witness cor. bears N. $89^{\circ}51'$ W., 12.60 chs. dist., marked by an iron post $2\frac{1}{2}$ ins. diam., set, mkd. and witnessed as described in the official record. True point for corner falls in bottom of canyon draining southwesterly.

Survey of a Portion of the Subdivision of T. 40 S., R. 7 E.

CHAINS

Land, rolling E. portion, broken W. portion.
Soil, sand and exposed sandstone.
Timber, scattered juniper and pinon.
Undergrowth, sage and oak brush.

From the true point for the cor. of secs. 28, 29, 32 and 33, previously described.

N. 0°03' W., bet. secs. 28 and 29.

Over broken land of W. breaks of Fifty Mile Mtn., asc. 200 ft. along E. slope of canyon. By triangulation, topography estimated.

40.00 Point for the $\frac{1}{2}$ sec. cor. of secs. 28 and 29, falls on steep and ledgy E. slope and cannot be perpetuated.

41.70 Canyon changes course to NE., asc. gradual SE. slope.

42.00 Point selected for the witness cor. of secs. 28 and 29.

Set an iron post 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 16 ins. in the ground, in a mound of stone, 4 ft. base, to top, with brass cap mkd.

T40S R7E

$\frac{1}{2}$

S29 | S28

↓
W C

1965

Asc. 150 ft. over SE. slope.

62.00 Slope changes, asc. gentle S. slope of bench on Fifty Mile Mtn.

80.00 Point for the cor. of secs. 20, 21, 28 and 29.

Set an iron post 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 15 ins. in the ground, in a mound of stone, 4 ft. base, to top, with brass cap mkd.

T40S R7E

S20 | S21

S29 | S28

1965

Land, broken.
Soil, sandy with exposed sandstone.
Timber, scattered juniper.
Undergrowth, sage and oak brush.

From the cor. of secs. 21, 22, 27 and 28, previously described.

S. 89°55' W., bet. secs. 21 and 28.

Over rolling land on top of Fifty Mile Mtn., through heavy sage brush and scattered pinon, asc. 50 ft. over gentle SE. slope.

39.98 Point for the $\frac{1}{2}$ sec. cor. of secs. 21 and 28.

Set an iron post 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 8 ins. in the ground, in a mound of stone, 4 ft. base, to top, with brass cap mkd.

Survey of a Portion of the Subdivision of T. 40 S., R. 7 E.

CHAINS	
	<p style="text-align: center;">T40S R7E</p> <p style="text-align: center;">$\frac{1}{4}$ $\frac{S21}{S28}$</p> <p style="text-align: center;">1965</p> <p>Desc. 80 ft. over gentle SW. slope.</p> <p>62.00 Head of canyon, drains SW., asc. 60 ft. over gentle SE. slope.</p> <p>78.50 Leave heavy timber, enter scattered timber and heavy sage brush.</p> <p>79.96 The cor. of secs. 20, 21, 28 and 29.</p> <p>Land, rolling Mtn. top. Soil, sand and exposed sandstone. Timber, pinon. Undergrowth, sagebrush and scattered oak brush</p>
	<p>N. 0°04' W., bet. secs. 20 and 21.</p> <p>Over rolling top of Fifty Mile Mtn., through scattered timber and oak brush, desc. 170 ft. along gentle W. slope.</p> <p>30.00 Small draw, drains W., asc. 45 ft. over gentle SW. slope.</p> <p>40.08 Point for the $\frac{1}{4}$ sec. cor. of secs. 20 and 21.</p> <p>Set an iron post 30 ins. long, 2$\frac{1}{2}$ ins. diam., 15 ins. in the ground, in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T40S R7E</p> <p style="text-align: center;">$\frac{1}{4}$ S20 S21</p> <p style="text-align: center;">1965</p> <p>Asc. gentle SW. slope.</p> <p>50.40 S. rim of canyon, bears E. and W., desc. 135 ft. over N. slope.</p> <p>53.70 Bottom of canyon, drains W., asc. 135 ft. over S. slope.</p> <p>63.40 N. rim of same canyon, bears E. and W., thence over rolling Mtn. top.</p> <p>75.60 S. rim of canyon, bears E. and W., desc. 165 ft. over brushy N. slope of canyon.</p> <p>80.16 The cor. of secs. 16, 17, 20 and 21, marked by an iron post 2$\frac{1}{2}$ ins. diam., set, mkd. and witnessed as described in the official record.</p> <p>Land, rolling and broken Mtn. top. Soil, sand and exposed sandstone. Timber, scattered juniper and pinon. Undergrowth, sagebrush and scattered oak brush.</p>
	<p>From the true point for the cor. of secs. 8, 9, 16 and 17, from which its witness corner bears S. 0°03' E., 8.74 chs. dist., marked by an iron post 2$\frac{1}{2}$ ins. diam., set, mkd. and witnessed as described in the official record.</p> <p>N. 0°03' W., bet. secs. 8 and 9.</p>

Surve of the Subdivision of T. 40 S., R. 7 E.

CHAINS

- Over broken land on E. breaks of Fifty Mile Mtn., desc. 400 ft. over ledgy NE. slope of Straight Cliffs. By triangulation, topography estimated.
- 10.00 Base of ledgy descent, bears NW. and SE., desc. 200 ft. over broken bench, draining NE., through bushes and scattered timber.
- 40.00 Point for the $\frac{1}{2}$ sec. cor. of secs. 8 and 9.
- Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 15 ins. in the ground, in a mound of stone, 3 ft. base, to top, with brass cap mkd.
- T40S R7E
 $\frac{1}{2}$
S8 | S 9
- 1965
- Desc. 60 ft. down small hollow, draining N.
- 45.90 Leave hollow, which changes course to NE., desc. 225 ft. over NE. slope of bench.
- 71.60 Bulldozed road, bears NW. and SE.
- 80.00 Point for the cor. of secs. 4, 5, 8 and 9.
- Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins. in the ground, in a mound of stone 4 ft. base, to top, with brass cap mkd.
- T40S R7E
S5 | S4
S8 | S9
- 1965
- Land, broken.
Soil, sand and exposed sandstone.
Timber, scrub juniper.
Undergrowth, black brush.
- From the cor. of secs. 3, 4, 9 and 10, previously described.
- N. $89^{\circ}55'$ W., bet. secs. 4 and 9.
- Over broken land on E. breaks of Fifty Mile Mtn., through scattered juniper, asc. 30 ft. over NE. slope on top of spur.
- .20 Bulldozed road, bears NE. and SW.
- 3.80 W. rim of spur, bears NE. and SW., desc. 45 ft. over NW. slope.
- 6.20 Gully, drains NE., asc. 125 ft. over E. slope.
- 12.40 Spur, slopes N., desc. 245 ft. over steep . slope.
- 18.30 Ravine, drains N., asc. 205 ft. over steep E. slope.
- 24.90 Spur, slopes N., desc. 130 ft. over W. slope.
- 29.30 Ravine, drains N., asc. 155 ft. over E. slope.
- 33.60 Spur, slopes N., desc. 95 ft. over NW. slope.

Survey of a Portion of the Subdivision of T. 40 S., R. 7 E.

CHAINS

37.40	Ravine, drains NE., also base of ledges, asc. 200 ft. over ledgy E. slope.
40.00	Point for the $\frac{1}{2}$ sec. cor. of secs. 4 and 9. Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 4 ins. in the ground, in a mound of stone, 4 ft. base, to top, with brass cap mkd. T40S R7E $\frac{1}{2} \frac{S \ 4}{S \ 9}$ 1965 Asc. 600 ft. over ledgy E. slope.
51.70	E. crest of bench, bears NW. and SE. irregular, asc. 200 ft. over broken bench, draining NE., through scrub juniper.
80.00	The cor. of secs. 4, 5, 8 and 9. Land, broken. Soil, sand and exposed sandstone. Timber, scrub juniper. Undergrowth, black brush.
	N. $0^{\circ}02'$ W., bet. secs. 4 and 5. Over broken bench land draining NE. through scrub juniper and pinon, desc. 130 ft.
37.70	E. crest of bench, bears NW. and SE. irregular, desc. 85 ft. over ledgy NE. slope.
40.00	Point for the $\frac{1}{2}$ sec. cor. of secs. 4 and 5. Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins. in the ground, in a mound of stone, with brass cap mkd. T40S R7E $\frac{1}{2}$ S5 S4 1965 Desc. 600 ft. over ledgy NE. slope. By triangulation, topography estimated.
52.00	Wash in draw, drains NE., thence over series of small spurs and gullys draining NE.
79.90	The cor. of secs. 4, 5, 32 and 33, on the N. bdy., marked by an iron post $2\frac{1}{2}$ ins. diam., set, mkd. and witnessed as described in the official record. Land, broken. Soil, sand and exposed sandstone. Timber, scrub juniper and pinon. Undergrowth, black brush and bunch grass.
	From the cor. of secs. 29, 30, 31 and 32, marked by an iron post $2\frac{1}{2}$ ins. diam., set, mkd. and witnessed as described in the official record. S. $89^{\circ}56'$ W., bet. secs. 30 and 31.

Surve of a Portion of the Subdivision of T. 40 S., R. 7 E.

CHAINS

Over rolling land on top of Fifty Mile Mtn., through juniper and pinon.

24.70 W. rim of Fifty Mile Mtn., bears N. and S., desc. 600 ft. over ledgy SW. slope.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 30 and 31.

Set an iron post $2\frac{1}{2}$ ins. diam., 30 ins. long, 6 ins. in the ground, in a mound of stone, 4 ft. base, to top, with brass cap mkd.

T40S R7E

$$\frac{\frac{1}{4} \text{ S } 30}{\text{S } 31}$$

1965

Desc. 600 ft. over ledgy SW. slope.

76.30 Wash in draw, drains S., asc. 100 ft. over steep SE. slope of clay spur.

80.00 The cor. of secs. 25, 30, 31 and 36, on the W. bdy., marked by an iron post $2\frac{1}{2}$ ins. diam., set. mkd. and witnessed as described in the official record.

Land, broken.

Soil, sand and exposed sandstone, clay on lower elevation
Timber, pinon and juniper on higher elevations.
Undergrowth, sage brush on higher elevations.

From the cor. of secs. 29, 30, 31 and 32, previously described.

N. $0^{\circ}03'$ W., bet. secs. 29 and 30.

Over rolling top of Fifty Mile Mtn., through juniper and pinon, asc. 105 ft. over SE. slope.

11.10 Crest of ascent, bears NW. and SE., desc. 175 ft. over gentle N. slope.

39.50 Small spring, flows W., asc. 10 ft. over S. slope.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 29 and 30.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 4 ins. in the ground, in a mound of stone, 4 ft. base, to top, with brass cap mkd.

T40S R7E

$$\frac{1}{4}$$

S30|S29

1965

Asc. 180 ft. over general SW. slope.

46.00 Enter sage brush flat, leave timber.

68.10 Enter scattered timber.

78.40 S. rim of canyon, bears NW. and SE., desc. 80 ft. over NE. slope. through oak brush.

80.00 Point for the cor. of secs. 19, 20, 29 and 30.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground, in a collar of stone, with brass cap mkd.

Survey of a Portion of the Subdivision of T. 40 S., R. 7 E.

CHAINS	
	<p style="text-align: center;">T40S R7E</p> <p style="text-align: center;"> $\frac{S19 S20}{S30 S29}$ </p> <p style="text-align: center;">1965</p> <p>Land, rolling. Soil, sand and exposed sandstone. Timber, pinon and juniper. Undergrowth, sage and oak brush.</p>
	<p>From the cor. of secs. 20, 21, 28 and 29.</p> <p>N. 89°49' W., bet. secs. 20 and 29.</p> <p>Over broken land on top of Fifty Mile Mtn., through oak and sage brush, desc. 90 ft. over general W. slope.</p>
39.97	<p>Point for the $\frac{1}{4}$ sec. cor. of secs. 20 and 29.</p> <p>Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 8 ins. in the ground, in a mound of stone, 4 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T40S R7E</p> <p style="text-align: center;"> $\frac{\frac{1}{4} S20}{S29}$ </p> <p style="text-align: center;">1965</p>
48.14	<p>Desc. 210 ft. over steep SW. slope, into head of canyon.</p> <p>Wash in canyon, drains N. 80° W., asc. 45 ft. over NE. slope.</p>
58.90	Spur in canyon, slopes N., desc. 115 ft. over NW. slope.
63.90	Small draw, drains N., asc. 105 ft. over NE. slope.
69.40	Spur, slopes N., desc. 80 ft. along steep N. slope.
79.94	<p>The cor. of secs. 19, 20, 29 and 30.</p> <p>Land, broken. Soil, sand and exposed sandstone. Timber, scattered juniper and pinon. Undergrowth, oak and sage brush.</p>
	<p>S. 89°54' W., bet. secs. 19 and 30.</p> <p>Over broken land of E. breaks of Fifty Mile Mtn., through oak brush, asc. 80 ft. along N. slope.</p>
6.00	Spur in canyon, slopes NW., thence along steep N. slope.
9.20	Head of small draw, drains N.
16.00	Crest of S. rim of canyon, bears N. 80° W. and S. 80° E., 165 ft. over SW. slope, on Mtn. top.
40.00	<p>Point for the $\frac{1}{4}$ sec. cor. of secs. 19 and 30.</p> <p>Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins. in the ground, in a mound of stone, 4 ft. base, to top, with brass cap mkd.</p> <p style="text-align: center;">T40S R7E</p> <p style="text-align: center;"> $\frac{\frac{1}{4} S19}{S30}$ </p> <p style="text-align: center;">1965</p>

Survey of a Portion of the Subdivision of T. 40 S., R. 7 E.

CHAINS	
	Desc. 65 ft. over SW. slope.
49.80	W. rim of Fifty Mile Mtn., bears NW. and SW., desc. 200 ft. over ledges facing W. and steep W. slope into head of cove.
60.70	Crest of ledges facing W., desc. 300 ft.
68.30	Base of same ledges, bears N. and S., desc. 400 ft. over ledgy W. slope.
79.94	The cor. of secs. 19, 24, 25 and 30, on the W. bdy., marked by an iron post 2½ ins. diam., set, mkd. and witnessed as described in the official record.
	Land, broken. Soil, sand and exposed sandstone. Timber, juniper and pinon. Undergrowth, oak and sagebrush.
	From the cor. of secs. 19, 20, 29 and 30.
	N. 0°03' W., bet. secs. 19 and 20.
	Over broken land of W. breaks of Fifty Mile Mtn., desc. 220 ft. over steep N. slope of canyon, through oak brush. By triangulation, topography estimated.
10.00	Wash in canyon, drains W., asc. 200 ft. over SW. slope.
20.00	Spur, slopes W., desc. 180 ft. over NW. slope.
30.00	Wash in canyon, drains SW., asc. 400 ft. over ledgy SE. slope.
40.00	Point for the ½ sec. cor. of secs. 19 and 20, falls on ledges facing SE. and cannot be monumented.
40.50	N. rim of canyon, bears NE. and SW., asc. gradual S. slope, on mountain top.
40.62	Point selected for the witness ½ sec. cor. of secs. 19 and 20.
	Set an iron post 30 ins. long, 2½ ins. diam., 6 ins. in the ground, in a mound of stone 4 ft. base, to top, with brass cap mkd.
	T40S R7E ½ S19 S20 ↓ W C 1965
	Asc. 75 ft. over gradual S. slope.
54.20	S. rim small canyon, bears E. and W., desc. 250 ft. over N. slope.
60.00	Bottom of canyon, drains W., asc. 250 ft. over S. slope.
77.90	N. rim same canyon, bears E. and W., asc. gentle S. slope.
80.00	Point for the cor. of secs. 17, 18, 19 and 20.
	Set an iron post 30 ins. long, 2½ ins. diam., 8 ins. in the ground, in a mound of stone 4 ft. base, to top, with brass cap mkd.

Survey of a Portion of the Subdivision of T. 40 S., R. 7 E.

CHAINS

T40S R7E

$$\frac{S18|S17}{S19|S20}$$

1965

from which

A pinon, 12 ins. diam., bears N. $45\frac{1}{2}^\circ$ E., 87 lks. dist., mkd. T40S R7E S17 BT.

A juniper, 12 ins. diam., bears S. $48\frac{1}{2}^\circ$ E., 62 lks. dist., mkd. T40S R7E S20 BT.

A juniper, 8 ins. diam., bears S. $48\frac{1}{2}^\circ$ W., 21 lks. dist., mkd. T40S R7E S19 BT.

A juniper, 6 ins. diam., bears N. $25\frac{1}{2}^\circ$ W., 40 lks. dist., mkd. T40S R7E S18 BT.

Land, broken.

Soil, sand and exposed sandstone.

Timber, juniper and pinon.

Undergrowth, oak and sage brush.

From the cor. of 16, 17, 20 and 21, previously described N. $89^\circ 55'$ W., bet. secs. 17 and 20.

Over broken mountain land, desc. 100 ft. over brushy NW. slope of canyon.

10.00 Wash in canyon, drains S. 80° W., asc. 50 ft. over SE. slope.

19.50 Slope changes, thence along gentle S. slope, above canyon.

39.99 Point for the $\frac{1}{4}$ sec. cor. of secs. 17 and 20.

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 4 ins. in the ground, in a mound of stone, 4 ft. base, to top, with brass cap mkd.

T40S R7E

$$\frac{\frac{1}{4} S17}{S20}$$

1965

Asc. 50 ft. along S. slope, above canyon.

51.80 Leave S. slope, thence over rolling mountain land.

79.98 The cor. of secs. 17, 18, 19 and 20.

Land, mostly broken.

Soil, sand and exposed sandstone.

Timber, juniper and pinon.

Undergrowth, oak and sage brush.

S. $89^\circ 56'$ W., bet. secs. 18 and 19.

Over rolling land on top of Fifty Mile Mtn., through dense timber.

16.40 E. rim of canyon, bears NE. and SW., desc. 450 ft. over ledgy W. slope. By triangulation, topography estimated.

Survey of a Portion of the Subdivision of T. 40 S., R. 7 E.

CHAINS	
25.00	Bottom of canyon, drains SW., asc. 250 ft. over ledgy SE. slope.
40.00	Point for the $\frac{1}{2}$ sec. cor. of secs. 18 and 19, falls on ledges facing SE. and cannot be monumented.
40.44	Point selected for the witness $\frac{1}{2}$ sec. cor. of secs. 18 and 19.
	Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins. in the ground, in a mound of stone, 4 ft. base, to top, with brass cap mkd.
	T40S R7E
	$\frac{1}{2} \begin{array}{c} \text{S18} \\ \text{S19} \end{array} \rightarrow \begin{array}{c} \text{W} \\ \text{C} \end{array}$
	1965
	Asc. 200 ft. over SE. slope of canyon.
50.90	W. rim same canyon, bears N. and S., thence over rolling mountain top.
56.00	Enter sage brush flat.
79.86	The cor. of secs. 13, 18, 19 and 24, on the W. bdy., marked by an iron post, $2\frac{1}{2}$ ins. diam., set, mkd. and witnessed as described in the official record.
	Land, rolling on mountain top, broken in canyon. Soil, sand and exposed sandstone. Timber, pinon and juniper. Undergrowth, sage brush.
	From the cor. of secs. 17, 18, 19 and 20.
	N. $0^{\circ}03'$ W., bet. secs. 17 and 18.
	Over rolling land on top of Fifty Mile Mtn., through sagebrush and scattered timber.
11.60	Slope changes, desc. 40 ft. over gradual NW. slope.
21.80	S. crest of small canyon, bears NE. and SW., desc. 400 ft. over NW. slope.
37.00	Bottom of canyon, drains SW., asc. 30 ft. over SE. slope.
40.00	Point for the $\frac{1}{2}$ sec. cor. of secs. 17 and 18.
	Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 4 ins. in the ground, in a mound of stone, 4 ft. base, to top, with brass cap mkd.
	T40S R7E
	$\frac{1}{2}$
	S18 S17
	1965
	from which
	A pinon, 14 ins. diam., bears S. $52\frac{1}{2}^{\circ}$ E., 56 lks. dist., mkd. $\frac{1}{2}$ S17 BT.
	A pinon, 14 ins. diam., bears S. $36\frac{1}{2}^{\circ}$ W., 14 lks. dist., mkd. $\frac{1}{2}$ S18 BT.
	Asc. 380 ft. over broken SW. slope.

Survey of a Portion of the Subdivision of T. 40 S., R. 7 E.

CHAINS

76.50	N. crest canyon, bears NE. and SW., thence over broken mountain land.
80.00	Point for the cor. of secs. 7, 8, 17 and 18. Set an iron post 30 ins. long, 2½ ins. diam., 24 ins. in the ground, in a collar of stone, with brass cap mkd. T40S R7E $\begin{array}{c c} \hline S\ 7 & S\ 8 \\ \hline S18 & S17 \\ \hline \end{array}$ 1965 Land, broken. Soil, sand and exposed sandstone. Timber, juniper and pinon. Undergrowth, sage brush.
	From the true point for the cor. of secs. 8, 9, 16 and 17, from which its witness cor. bears S. 0°03' E., 8.74 chs. dist., previously described. West, bet. secs. 8 and 17. Over broken land of Fifty Mile Mtn., asc. about 600 ft. over ledgy NE. slope of Straight Cliffs.
7.00	E. rim of Fifty Mile Mtn., bears NW. and SE., desc. 100 ft. over mountain land, draining SW.
40.00	Point for the ¼ sec. cor. of secs. 8 and 17. Set an iron post 30 ins. long, 2½ ins. diam., 6 ins. in the ground, in a mound of stone, 4 ft. base, to top, with brass cap mkd. T40S R7E $\begin{array}{c} S\ 8 \\ \hline \frac{1}{4}S17 \end{array}$ 1965 Desc. 100 ft. over W. slope.
47.00	Draw, drains S., asc. 150 ft. over E. slope.
55.00	Ridge, bears N. and S., desc. 150 ft. over W. slope.
65.00	Draw, drains S., asc. 150 ft. over E. slope.
74.00	W. crest of draw, bears N. and S., thence over mountain top, through heavy growth of sage brush.
80.00	The cor. of secs. 7, 8, 17 and 18. Land, broken mountain. Soil, sand and exposed sandstone. Timber, juniper and pinon. Undergrowth, sage brush.
	West, bet. secs. 7 and 18. Over mountain land, through dense sage brush and scattered timber, asc. 40 ft. over gentle E. slope.

Survey of a Portion of the Subdivision of T. 40 S., R. 7 E.

CHAINS	
19.90	Crest of ascent, bears N. and S., desc. 20 ft. over gentle W. slope.
29.90	Sandstone ledge, bears NW. and SE., desc. 65 ft. over SW. slope.
33.80	Small draw, drains S., asc. 45 ft. over E. slope.
40.00	Point for the $\frac{1}{2}$ sec. cor. of secs. 7 and 18. Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins. in the ground, in a mound of stone, 4 ft. base, to top, with brass cap mkd. T40S R7E $\frac{1}{2} \frac{S 7}{S18}$ 1965 Asc. 50 ft. over E. slope.
48.10	Low ridge, bears N. and S., desc. 125 ft. over W. slope, through dense sage brush.
79.80	The cor. of secs. 7, 12, 13 and 18, on the W. bdy., marked by an iron post, $2\frac{1}{2}$ ins. diam., set, mkd. and witnessed as described in the official record. Land, broken mountain. Soil, sand and exposed sandstone. Timber, juniper and pinon. Undergrowth, sage brush.
	From the cor. of secs. 7, 8, 17 and 18. N. $0^{\circ}03'$ W., bet. secs. 7 and 8. Over mountain land, through sage brush and scattered timber.
5.30	S. crest of small draw, bears NW. and SE., desc. 115 ft. over NE. slope.
12.00	Small draw, drains SE., asc. 30 ft. over SW. slope.
14.00	Small spur, slopes E., desc. 20 ft. along gentle E. slope.
21.30	Small draw, drains SE., asc. 35 ft. over gentle SW. slope.
29.50	Low ridge, bears NW. and SE., thence over mountain top.
39.60	E. crest of Fifty Mile Mtn., bears NW. and SE., desc. 20 ft. over steep NE. slope of Straight Cliffs.
40.00	Point for the $\frac{1}{2}$ sec. cor. of secs. 7 and 8. Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 4 ins. in the ground, in a mound of stone, 4 ft. base, to top, with brass cap mkd. T40S R7E $\frac{1}{2}$ S7 S8 1965 Desc. about 900 ft. over ledgy NE. slope of Straight Cliffs. By triangulation.

Survey of a Portion of the Subdivision of T. 40 S., R. 7 E.

CHAINS	
70.00	Base of straight Cliffs, bears NW. and SE., desc. 200 ft. over steep and rocky NE. slope.
79.88	Point selected for the witness cor. of secs. 5, 6, 7 and 8.
	Set an iron post 30 ins. long, 2½ ins. diam., 10 ins. in the ground, in a mound of stone, 4 ft. base, to top, with brass cap mkd.
	T40S R7E
	W C
	$\begin{array}{r l} \text{S6} & \text{S5} \\ \hline \text{S7} & \text{S8} \end{array}$
	1965
80.00	Point for the cor. of secs. 5, 6, 7 and 8, falls on huge boulder and cannot be monumented.
	Land, broken. Soil, sand and exposed sandstone. Timber, juniper and pinon. Undergrowth, sage brush and black brush.
	From the cor. of secs. 4, 5, 8 and 9.
	S. 89°55' W., bet. secs. 5 and 8.
	Over broken bench land, draining NE., desc. 40 ft. over NW. slope.
14.70	Small draw, drains N., asc. 100 ft. over general NE. slope.
39.96	Point for the ¼ sec. cor. of secs. 5 and 8.
	Set an iron post 30 ins. long, 2½ ins. diam., 12 ins. in the ground, in a mound of stone, 4 ft. base, to top, with brass cap mkd.
	T40S R7E
	$\frac{\frac{1}{4} \text{ S } 5}{\text{S } 8}$
	1965
	Asc. NE. slope.
41.70	E. crest of small draw, bears NE. and SW., desc. 60 ft. over NW. slope.
48.10	Small draw, drains NE., asc. 90 ft. over SE. slope.
53.30	Spur, slopes N., desc. 160 ft. over W. slope.
70.50	Draw, drains N., asc. 175 ft. over E. slope.
77.60	Spur, slopes N., desc. 45 ft. over NW. slope.
79.92	True point for the cor. of secs. 5, 6, 7 and 8, from which its witness cor. bears S. 0°03' E., 0.12 chs. dist. previously described.
	Land, broken. Soil, sandy clay. Timber, scrub juniper. Undergrowth, black brush.

Survey of a Portion of the Subdivision of T. 40 S., R. 7 E.

CHAINS

From the true point for the cor. of secs. 5, 6, 7 and 8, from which its witness cor. bears S. 0°03' E., 0.12 chs. dist.

S. 89°56' W., bet. secs. 6 and 7.

Over broken land of E. breaks of Fifty Mile Mtn., asc. 200 ft. over irregular NE. slope.

- 9.00 Base of Straight Cliffs, bears NW. and SE., asc. about 800 ft. over ledgy NE. slope. By triangulation.
- 38.50 Crest of Straight Cliffs, bears NW. and SE., thence over top of Fifty Mile Mtn.
- 40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 6 and 7.
- Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins. in the ground, in a mound of stone, 4 ft. base, to top, with brass cap mkd.

T40S R7E

$\frac{S 6}{\frac{1}{4} S 7}$

1965

Continue over rolling top of Fifty Mile Mtn., through juniper and pinon.

- 67.50 Leave timber, enter sage brush flat.
- 79.74 The cor. of secs. 1, 6, 7 and 12, on the W. bdy., marked by an iron post, $2\frac{1}{2}$ ins. diam., set, mkd. and witnessed as described in the official record.
- Land, broken E. portion, rolling W. portion.
Soil, sand and exposed sandstone.
Timber, juniper and pinon.
Undergrowth, sage brush.

From the true point for the cor. of secs. 5, 6, 7 and 8, from which its witness cor. bears S. 0°03' E., 0.12 chs. dist.

N. 0°05' W., bet. secs. 5 and 6.

Over broken bench land, through scattered timber, desc. 50 ft. over NW. slope.

- 22.20 Draw drains NE., asc. 110 ft. over SE. slope.
- 33.20 Spur slopes E., desc. 70 ft. along E. slope.
- 40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 5 and 6, falls on small sandstone ledge and cannot be perpetuated.
- 40.06 Point selected for the witness $\frac{1}{4}$ sec. cor. of secs. 5 and 6.
- Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins. in the ground, in a mound of stone, 4 ft. base, to top, with brass cap mkd.

T40S R7E

$\frac{1}{4}$

S 6 | S 5

WVC

1965

Survey of a Portion of the Subdivision of T. 40 S., R. 7 E.

CHAINS

80.04

Desc. 160 ft. along general E. slope, through scattered juniper.

The cor. of secs. 5, 6, 31 and 32, on the N. bdy., marked by an iron post, 2½ ins. diam., set, mkd. and witnessed as described in the official record.

Land, broken bench.
Soil, sandy clay.
Timber, scrub juniper.
Undergrowth, black brush.

General Description

T. 40 S., R. 7 E. is divided by the Straight Cliffs, which bear NW. and SE. through the township. The NE. portion of the township consists mostly of very broken bench land below the Straight Cliffs of the Fifty Mile Mountain, with the extreme NE. corner of the township extending into the Escalante Desert. The SW. portion of the township is mostly rolling to broken land on top of the Fifty Mile Mountain.

The roads within the township are a graded dirt road, Escalante to Hole in the Rock, which enters the township on the north bdy. of sec. 2, bears SE., leaving the township on the E. bdy. of sec. 13. A bulldozed branch of this road enters the township on the N. bdy. of sec. 3, bears SW. into the bench below the Straight Cliffs, thence SE. below the Straight Cliffs, leaving the township on the E. bdy. of sec. 36. There are no roads on the Fifty Mile Mountain.

The only permanent water noted during the survey is a small spring on the Fifty Mile Mountain.

The timber consists of pinon and juniper with scattered patches of quaking aspen on the mountain top. The main undergrowth is oak and sage brush on the higher elevations, black brush on the lower elevations.

The elevation varies from about 4600 to 7600 feet above sea level.

There is no habitation within the township.

Blank

Page

CERTIFICATE OF SURVEY

I, Craig P. Sylvester, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 15th day of October, 19 64, I have surveyed a portion of the subdivisional lines completing the subdivision of Township 40 South, Range 7 East,

of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

March 23, 1966
(Date)

Craig P. Sylvester
(Cadastral Surveyor)
Supervisory

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

SUBMITTED FOR APPROVAL
Date FEB 10 1967

BUREAU OF LAND MANAGEMENT,
Washington, D. C.

The foregoing field notes of the survey of a portion of the subdivisional lines completing the subdivision of Township 40 South, Range 7 East, Salt Lake Meridian, Utah.

executed by Craig P. Sylvester, Supervisory Cadastral Surveyor, having been critically examined and found correct, are hereby approved.

(Date)

E. J. Lemington
(Chief, Division of Engineering)

CERTIFICATE OF TRANSCRIPT

40 South, Range 7 East, Meridian, Utah, is a true copy of the original field notes.

(Date)

(Date)