

Volume

#

R0581

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

U.S. DEPT. OF LAND MGMT.
NOV 10 10 35

ORIGINAL

FIELD NOTES

OF THE

RETRACEMENT

OF

A PORTION OF THE SOUTH BOUNDARY

(FOURTH STANDARD PARALLEL SOUTH)

A PORTION OF THE SUBDIVISIONAL LINES

AND

THE DEPENDENT RESURVEY

OF

A PORTION OF THE EAST BOUNDARY

A PORTION OF THE WEST BOUNDARY

AND

A PORTION OF THE SUBDIVISIONAL LINES

AND MEANDERS OF THE COLORADO RIVER

IN

TOWNSHIP 20 SOUTH, RANGE 25 EAST

Of the SALT LAKE Meridian,

In the State of UTAH.

EXECUTED BY

GLEN B. HATCH

SUPERVISORY CADASTRAL SURVEYOR

Under special instructions dated SEPTEMBER 21, 19 62, which provided for the surveys and Supplemental Instructions dated August 24, 1966 included under Group Number 459, approved OCTOBER 1, 1962,

and assignment instructions dated AUGUST 14, 19 63, and August 25, 1966

Survey commenced SEPTEMBER 9, 19 63

INDEX DIAGRAM

Township 20 SOUTH, Range 25 EAST,

6 61 60	5 47 59	4 38 46	3 24 37	2 17 23	1 3 14
7 58 57	8 45 56	9 35 44	10 22 34	11 16 21	12 5 13
10 18 55 54	17 44 53	16 33 43	15 20 31	14 12 18	13 6 11
9 19 52 51	20 42 51	21 30 41	22 19 28	23 24	24 7 25
30 50 49	29 40 48	28 27 39	27 25	26 25	25 26
9 31 47	32 39	33 2	26 34	35	36

Present Meanders of Colorado River:

Right Bank, pages 62 to 64 incl.

Left Bank, pages 64 to 68 incl.

Adjusted Original Meanders:

Left Bank, pages 69 to 72 incl.

Township 20 South, Range 25 East

CHAINS

The north boundary was surveyed by Frank E. Baxter in 1894, and was dependently resurveyed concurrently with this survey. The west 2-3/4 miles of the south boundary (Fourth Standard Parallel South), were surveyed by Frank E. Baxter in 1894, and were retraced in 1910 by Howard W. Miller, who also surveyed the east 3½ miles of this boundary. The north 4 miles of the east boundary were surveyed in 1894 by Frank E. Baxter, and were retraced by Howard W. Miller in 1910, who surveyed the south 2 miles of this boundary that same year. The west boundary was surveyed by A. D. Ferron in 1884, and was retraced in 1894 by Frank E. Baxter. In 1910, Howard W. Miller retraced the south 4 miles and resurveyed the north 2 miles of this boundary. The north and west 3/4 of the subdivisional lines were surveyed by Frank E. Baxter in 1894, and the southeast 1/4 was surveyed by Howard W. Miller in 1910.

The following field notes are those of the retracement of a portion of the south boundary (Fourth Standard Parallel South), and a portion of the subdivisional lines, and the dependent resurvey of a portion of the east boundary, a portion of the west boundary, and a portion of the subdivisional lines of Township 20 South, Range 25 East.

Before restoring the corners, the lines of the original survey were retraced, and a diligent search made for any evidence of the original corners, bearing trees, and other calls of the original field note record.

The rules of proportionate measurement were applied to ascertain the position of the lost corners, but not until exhausting every reasonable possibility of finding direct evidence for the control of each particular corner.

The cost of the field and office work incurred in the execution of the retracements and dependent resurveys herein described are payable from the current appropriation for "Management of Lands and Resources, Bureau of Land Management."

The retracements and dependent resurveys were executed with a W. & L.E. Gurley Solar Transit No. 580518, constructed in accordance with the standard instrumental specifications of the Bureau of Land Management. The instrument was in good condition prior to the beginning of the survey and was maintained in proper adjustment throughout the progress of the survey.

Lines connecting previously established corners were run by random and true method, but for simplification of the record the random lines are omitted from the field notes.

Measurements herein contained were made with a narrow steel tape, 8 chains in length, graduated every link for the first 100 links and thereafter at intervals of 10 links. The tape was tested by comparison with a one chain standard steel tape and found to be correct. Measurements were made on the slope with the vertical angle of each interval ascertained with a clinometer in good adjustment; horizontal equivalents alone are entered in the field notes. All lines of this survey were run by direct method where the lines were accessible; lines

Township 20 South, Range 25 East

CHAINS

inaccessible were run by traverse or triangulation methods. Distances to topography on lines run by traverse or triangulation are approximate. The details of such traverses or triangulations have been thoroughly checked and verified, and in order to simplify the record, the diagrams and reductions are omitted from these field notes.

The direction of the lines of this survey were determined by reference to true meridians established on line by altitude observations on the sun. The lines were carried forward by sustained angulation being supplemented by other numerous altitude observations on the sun taken throughout the progress of the survey.

The geographic position for the southeast corner of the township is at Latitude $39^{\circ} 00' 57''$ North and Longitude $109^{\circ} 05' 18''$ West as adjusted from section line ties to U.S.C. & G.S. triangulation station "West," located S. $12^{\circ} 18' E.$, 12.65 chs. dist. from the 1/4 section corner of sections 2 and 35, Townships 19 and 20 South, Range 25 East.

The magnetic declination was read at a number of stations throughout the township and the average of these readings was found to be $15^{\circ} 30' E.$

Generally, the river banks at the meander line are unstable and changing position rather rapidly, either by erosion or accretion. The very considerable changes in the position of the river which have taken place since the original survey of 1894 are the result of erosive, accretive action rather than evulsive, so that ownership of shore lands have moved with the changing river position. In several instances in the present work, due to the unstable, unsafe condition of the river banks, the positions for meander corners on the present river banks have not been monumented.

Retracement of a Portion of the South Boundary (Fourth Standard Parallel South).

Retracement of a Survey Executed by Frank E. Baxter in 1894 and Howard W. Miller in 1910.

Beginning at the standard cor. of secs. 32 and 33, on S. bdy. of T. 20 S., R. 25 E., monumented with an iron post, 3 ins. diam., set, mkd. and witnessed as described in the official record of the 1910 resurvey.

S. $89^{\circ} 57' E.$, along the S. bdy. of sec. 33.

Over mountainous land through scattered to medium dense scrub pinon and juniper timber. Asc. 150 ft. over gradual SW. slope.

Retracement of a Portion of the S. Bdy., T. 20 S., R. 25 E.

CHAINS	
32.00	Ridge, bears NW. and SE., desc. 50 ft. over NE. slope.
38.50	Draw, drains N., asc. 40 ft. over W. slope.
40.26	The standard 1/4 sec. cor. of sec. 33, monumented with a 1 in. iron post, set, mkd. and witnessed as described in the official record of the 1910 survey.
	<hr/> East, beginning new measurement. Asc. 120 ft. over W. slope.
18.30	Top of ascent bears N. and S., thence by triangulation, desc. about 400 ft. over ledgy E. slope, leave timber.
34.85	The meander cor. on S. bdy. sec. 33, monumented with an iron post, 3 ins. diam., set, mkd. and witnessed as described in the official record of the 1910 survey. End triangulation.
41.43	True point for the standard cor. of secs. 33 and 34, at proportionate dist., falls in Colorado River, from which the meander cor. on S. bdy. sec. 34 bears East 1.51 chs. dist., monumented with an iron post, 3 ins. diam., set, mkd. and witnessed as described in the official record of the 1910 survey.
	Land, mountainous. Soil, sandy, rocky, considerable exposed sandstone. Timber, medium dense scrub pinon and juniper W. 68.00 chs. No timber E. 23.00 chs. Undergrowth, scattered shadscale and sagebrush W. 68.00 chs. No undergrowth E. 23.00 chs.
Dependent Resurvey of a Portion of the East Boundary Township 20 South, Range 25 East	
Reestablishment of the Survey Executed by Frank E. Baxter in 1894.	
	<hr/> From the cor. of Tps. 19 and 20 S., Rs. 25 and 26 E., monumented with a 2½ ins. iron post, set, mkd. and witnessed as described in the 1963 field notes of the S. Bdy., T. 19 S., R. 25 E.
	S. 0° 05' E., bet. secs. 1 and 6.
	Over nearly level river bottom land through dense greasewood, willows, and tamarack undergrowth.
0.86	Powerline bears S. 58° 52' W. and N. 58° 52' E.
1.00	Abandoned railroad track parallels powerline.
1.63	Point for the original meander cor. of secs. 1 and 6 on the right bank of the Colorado River at proportionate dist.; there is no remaining evidence of the original cor.
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone to top, with brass cap mkd.

Dependent Resurvey of a Portion of the E. Bdy., T. 20 S., R. 25 E.

CHAINS

T20S
R25E R26E
S1|S6
M C
1963

- 4.69 Present track of Denver and Rio Grande Western Railroad bears S. 54° 35' W. and N. 54° 35' E.
- 5.47 Telephone line parallels railroad.
- 24.50 Present right bank of Colorado River bears NE. and SW. Point for the present meander cor. secs. 1 and 6, not monumented. Thence by triangulation.
- 25.77 Point for the original meander cor. of secs. 1 and 6 on the left bank, at proportionate dist., falls in Colorado River; there is no remaining evidence of the original cor.
- 37.70 Point selected for the witness meander cor. of secs. 1 and 6 on the present left bank of Colorado River. End triangulation.
- Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone to top, with brass cap mkd.

WMC
S1|S6
T20S
R25E | R26E
1963

- 42.11 Point for the 1/4 sec. cor. of secs. 1 and 6 proportionate dist.; there is no remaining evidence of the original cor.
- Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone to top, with brass cap mkd.

T20S
R25E R26E
½
S1|S6
1963

- Continue over nearly level bottom land through medium dense cottonwood timber and greasewood undergrowth.
- 82.11 The cor. of secs. 1, 6, 7 and 12, monumented with a sandstone, 14x10x6 ins., firmly set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T20S
R25E R26E
S1|S6
S12|S7
1963

Dependent Resurvey of a Portion of the E. Bdy., T.20 S., R. 25 E.

CHAINS

Dig pits, 18x18x12 ins. in each sec., 3 ft. dist., and bury original stone cor. alongside iron post.

Land, nearly level river bottom.

Soil, sandy.

Timber, medium dense cottonwood south of river; none north of river.

Undergrowth, dense greasewood, willows, and tamarack north of river; scattered greasewood south of river.

S. 0° 04' W., bet. secs. 7 and 12.

Over nearly level bottom land through scattered greasewood and sagebrush.

- 8.70 Old log cabin bears East, 25 links dist.
- 25.10 Wash, 10 lks. wide, 2 ft. deep, drains W.
- 37.30 Base of spur bears NE. and SW., asc. 90 ft. over NW. slope.
- 40.00 The 1/4 sec. cor. of secs. 7 and 12, monumented with a sandstone, 12x10x6 ins., firmly set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone to top, with brass cap mkd.

T20S
R25E R26E
↓
S12|S7
1963

Bury original stone cor. alongside iron post.

Cor. falls 10 lks. north of sandstone ledge, 200 ft. high.

S. 0° 03' W., beginning new measurement.

By triangulation, asc. abruptly about 200 ft. over sandstone ledge, bears NE. and SW.

- 4.25 Top of ledge, spur slopes SW., desc. abruptly 160 ft. over sandstone ledges facing SE.
- 11.60 Ledgy draw drains SW., asc. abruptly about 250 ft. over sandstone ledges facing NW.
- 18.45 Ledgy spur slopes SW. End triangulation. Desc. 85 ft. over steep, ledgy SE. slope.
- 26.40 Top of ledge, bears NE. and SW., desc. abruptly 80 ft. over sandstone ledge.
- 28.00 Base of ledge bears NE. and SW., desc. 40 ft. over SE. slope.
- 40.59 The cor. of secs. 7, 12, 13 and 18, monumented with a sandstone, 14x8x6 ins., set, mkd., and witnessed as described in the official record.

Dependent Resurvey of a Portion of the E. Bdy., T.20 S., R. 25 E.

CHAINS

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T20S
R25E R26E

S12|S7
S13|S18

1963

Dig pits, 18x18x12 ins., in each sec., and bury original stone cor. alongside iron post.

Land, nearly level bottom north portion; mountainous, ledgy south portion.

Soil, sandy north portion; sandstone ledgy south portion. No timber.

Undergrowth, scattered greasewood and sagebrush.

South, bet. secs. 13 and 18.

Over rolling land through scattered shadscale and sagebrush. Desc. 80 ft. over SE. slope.

- 14.40 Wash, 10 lks. wide, 2 ft. deep, drains SW., asc. 30 ft. over NW. slope.
- 20.90 Road, unimproved, on spur slopes SW., desc. 30 ft. over SE. slope.
- 26.80 Wash, 1.00 ch. wide, 10 ft. deep, drains W., asc. 45 ft. over N. slope.
- 30.75 Small spur slopes W., desc. 25 ft. over S. slope.
- 35.20 Wash, 15 lks. wide, 4 ft. deep, drains W., asc. 35 ft. over N. slope.
- 40.22 The $\frac{1}{4}$ sec. cor. of secs. 13 and 18, monumented with a sandstone, 14x10x2 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, and in a collar of stone to top, with brass cap mkd.

T20S
R25E R26E

$\frac{1}{2}$
S13|S18

1963

Bury original stone cor. alongside iron post.

S. $0^{\circ} 02'$ E., beginning new measurement.

Desc. 10 ft. over gentle SW. slope.

Dependent Resurvey of a Portion of the E. Bdy., T. 20 S., R. 25 E.

CHAINS

- 9.40 Wash, 30 lks. wide, 8 ft. deep, drains NW., asc. 25 ft. over NE. slope.
- 11.10 Small spur slopes NW., desc. 15 ft. over SW. slope.
- 18.60 Wash, 15 lks. wide, 3 ft. deep, drains W.
- 23.70 Wash, 30 lks. wide, 6 ft. deep, drains NW., asc. 60 ft. over NE. slope.
- 29.10 Road, unimproved, bears NW. and SE.
- 40.15 The cor. of secs. 13, 18, 19 and 24, monumented with a sandstone, 20x18x3 ins., firmly set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone to top, with brass cap mkd.

T20S
R25E R26E
S13 | S18
S24 | S19
1963

Bury original stone cor. alongside iron post.

Land, rolling.

Soil, sandy.

No timber.

Undergrowth, dense sagebrush.

S. 0° 01' E., bet. secs. 19 and 24.

Over rolling land through scattered timber and dense sagebrush. Desc. 20 ft. over S. slope.

- 6.00 Wash, 15 lks. wide, 5 ft. deep, drains W., asc. 20 ft. over N. slope.
- 12.70 Small spur slopes NW., desc. 15 ft. over SW. slope.
- 15.90 Wash, 10 lks. wide, 2 ft. deep, drains W., asc. 25 ft. over NE. slope.
- 20.00 Small spur slopes NW., desc. 10 ft. over SW. slope.
- 23.00 Wash, 20 lks. wide, 9 ft. deep, drains NW., asc. 50 ft. over NE. slope.
- 32.50 Spur slopes NW., desc. 15 ft. over SW. slope.
- 39:70 The 1/4 sec. cor. of secs. 19 and 24, monumented with a sandstone, 18x14x3 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone to top, with brass cap mkd.

Dependent Resurvey of a Portion of the E. Bdy., T. 20 S., R. 25 E.

CHAINS

T20S
R25E R26E

↓
S24 | S19

1963

Bury original stone cor. alongside iron post.

S. 0° 05' W., beginning new measurement.

Asc. 70 ft. over rolling land.

7.80 Wash, 15 lks. wide, 1 ft. deep, drains NW.

21.00 Wash, 20 lks. wide, 2 ft. deep, drains NW., asc. 190 ft. over N. slope.

40.15 The cor. of secs. 19 and 30, monumented with a sandstone, 20x16x4 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground, to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T20S
R25E R26E

↓
S24 | S19
S30

1963

Bury original stone cor. alongside iron post.

From the above cor., the closing cor. of secs. 24 and 25, T. 20 S., R. 25 E., bears South, 0.66 chs. dist., monumented with an iron post, 2 ins. diam., set, mkd. and witnessed as described in the official record of the 1910 survey.

Land, rolling north 60.00 chs.; mountainous south 20.00 chs.

Soil, sandy north 60.00 chs.; rocky south 20.00 chs.

Timber, scattered to medium pinon and juniper.

Undergrowth, dense sagebrush.

Dependent Resurvey of a Portion of the West Boundary
T. 20 S., R. 25 E.

Reestablishment of the Survey Executed by A. D. Ferron in 1884 and the Retracements, Executed by Frank E. Baxter in 1894, and Howard W. Miller in 1910.

From the standard cor. of Tps. 20 S., Rs. 24 and 25 E., monumented with a 3 in. iron post, set, mkd. and witnessed as described in the official record of the 1910 survey.

.Dependent Resurvey of a Portion of the W. Bdy., T. 20 S., R. 25 E.

CHAINS	
	N. 4° 20' E., bet. secs. 31 and 36.
	Over gently rolling land through scattered shadscale and sagebrush:
39.98	The 1/4 sec. cor. of secs. 31 and 36, monumented with a sandstone, 20x16x3 ins., set, mkd. and witnessed as described in the official record.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.
	T20S R24E R25E ½ S36 S31 1963
	Bury original stone cor. alongside iron post.
	North, beginning new measurement.
	Continue over rolling land.
4.20	Cottonwood Wash, 1.50 chs. wide, 10 ft. deep, drains SW.
36.40	Wash, 10 lks. wide, 4 ft. deep, drains E.
40.00	The cor. of secs. 25, 30, 31 and 36, monumented with a sandstone, 18x12x5 ins., set, mkd. and witnessed as described in the official record.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T20S R24E R25E S25 S30 S36 S31 1963
	Bury original stone cor. alongside iron post.
	Land, rolling.
	Soil, sandy.
	No timber.
	Undergrowth, sagebrush, shadscale and greasewood.
	From the cor. of secs. 19, 24, 25 and 30, monumented with a 3 in. iron post, set, mkd. and witnessed as described in the official record of the 1910 survey.
	North, bet. secs. 19 and 24.
	Over rolling land through scattered greasewood and sagebrush.
16.40	Road, unimproved, bears irregularly N. and S.
18.23	Over and Rio Grande Western Railroad, bears N. 50°30' E.

Dependent Resurvey of a Portion of the W. Bdy., T. 20 S., R. 25 E.

CHAINS	
26.30	Base of ascent bears E. and SW., asc. 240 ft. over SW. slope.
40.20	The 1/4 sec. cor. of secs. 19 and 24, monumented with a sandstone, 18x18x6 ins., set, mkd. and witnessed as described in the official record.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground, to bedrock, and in a mound of stone, 5 ft. base to top, with brass cap mkd.
	T20S R24E R25E ½ S24 S19 1963
	Bury original stone cor. alongside iron post.
	North, beginning new measurement.
	Asc. 160 ft. over SW. slope.
4.50	Spur, slopes SE. and NE., desc. 280 ft. over N. slope.
40.00	The cor. of secs. 13, 18, 19 and 24, monumented with a 3 in. iron post, set, mkd. and witnessed as described in the official record of the 1910 survey.
	Land, rolling S. portion; mountainous N. portion. Soil, sandy. No timber. Undergrowth, scattered greasewood and sagebrush.
	N. 0° 03' E., bet. secs. 13 and 18.
	Over mountainous land through scattered greasewood and sagebrush.
	Desc. 80 ft. over NW. slope.
26.50	Wash, 20 lks. wide, 2 ft. deep, drains SW., desc. 40 ft. along W. slope.
40.00	The 1/4 sec. cor. of secs. 13 and 18, monumented with a sandstone, 18x8x6 ins., set, mkd. and witnessed as described in the official record.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground, and in a collar of stone to top, with brass cap mkd.
	T20S R24E R25E ½ S13 S18 1963
	Bury original stone cor. alongside iron post.

Dependent Resurvey of a Portion of the W. Bdy., T. 20 S., R. 25 E.

CHAINS

- N. 0° 05' W., beginning new measurement.
 Desc. 40 ft. along W. slope.
- 10.00 Wash, drains W., asc. 50 ft. over S. slope.
- 16.50 Spur, slopes W., desc. 40 ft. over NW. slope.
- 28.30 Wash, 30 lks. wide, 3 ft. deep, drains SW., asc. 80 ft. over SW. slope.
- 40.00 The cor. of secs. 7, 12, 13 and 18, monumented with a 3 ins. iron post, set, mkd. and witnessed as described in the official record of the 1910 survey.
- Land, mountainous.
 Soil, sandy.
 No timber.
 Undergrowth, scattered greasewood and sagebrush.

Dependent Resurvey of a Portion of the Subdivision
 T. 20 S., R. 25 E.

Reestablishment of the survey executed by Frank E. Baxter in 1894, and retracement made by Howard W. Miller in 1910

From the cor. of secs. 13, 18, 19 and 24, on the E. bdy. of the Tp., hereinbefore described.

S. 89° 56' W., bet. secs. 13 and 24.

Over rolling land through scattered timber and dense sagebrush. Desc. 40 ft. over SW. slope.

- 9.65 Wash, 15 lks. wide, 3 ft. deep, drains NW.; asc. 30 ft. over NE. slope.
- 12.80 Small spur slopes NW., desc. 30 ft. over SW. slope.
- 16.20 Small draw drains NW., asc. 40 ft. over NE. slope.
- 20.80 Spur slopes N., desc. 40 ft. over SW. slope.
- 23.00 Wash, 10 lks. wide, 4 ft. deep, drains NW.; asc. 15 ft. over NE. slope.
- 25.00 Small spur slopes NW., desc. 40 ft. over gentle SW. slope.
- 39.90 Small wash drains NW.
- 40.27 The 1/4 sec. cor. of secs. 13 and 24, monumented with a sandstone, 20x8x4 ins., set, mkd. and witnessed as described in the official record.
- At the cor. point
- Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone to top, with brass cap mkd.

Dependent Resurvey of a Portion of the Subdivision, T. 20 S., R. 25 E.

CHAINS

T20S R25E

$$\frac{1}{2} \frac{S13}{S24}$$

1963

Bury original stone cor. alongside iron post, and set a sandstone, 24x20x6 ins., N. of cor.

S. 89° 58' W., beginning new measurement.

Desc. 10 ft. over SW. slope.

3.60 Wash, 10 lks. wide, 4 ft. deep, drains NW.

6.60 Wash, 8 lks. wide, 2 ft. deep, drains NW., asc. 20 ft. over NE. slope.

16.00 Enter dense timber, bears NW. and SE.

20.20 Spur slopes NW., desc. 45 ft. over SW. slope.

25.00 Leave timber, bears NW. and SE.

34.30 Wash, 15 lks. wide, 4 ft. deep, drains NW., asc. 10 ft. over NE. slope.

36.90 Small spur slopes NW., desc. 30 ft. over W. slope.

39.60 Road, unimproved, bears NE. and SW.

40.23 The cor. of secs. 13, 14, 23 and 24, monumented with a 3 in. iron post, set, mkd. and witnessed as described in the official record of the 1910 survey.

Cor. set in old fence line, bears N. 5° E. and S. 5° W.

Land, rolling.

Soil, sandy.

Timber, medium dense pinon and juniper.

Undergrowth, sagebrush.

Dependent Resurvey of a Portion of the Subdivision
T. 20 S., R. 25 E.

Reestablishment of the survey executed by Frank E.
Baxter in 1894.

N. 0° 01' W., bet. secs. 13 and 14.

Over nearly level land through dense sagebrush and greasewood.

7.30 Wash, 20 lks. wide, 9 ft. deep, drains N. 55° W.

24.20 Wash, 15 lks. wide, 8 ft. deep, drains W.

31.54 Left bank of Colorado River bears NE. and SW. This point selected for witness meander cor. and will also function as the MC of sec. 13.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

Dependent Resurvey of a Portion of the Subdivision, T. 20 S., R. 25 E.

CHAINS

WMC	
T20S	R25E
S14	S13

1963

Deposit broken glass at base of iron post.

Thence, by triangulation over the bed of the Colorado River, part open water, part gravel and mud bars with some willows; all subject to overflow at ordinary high water stage.

35.70 Point for the original meander cor. of secs. 13 and 14 on the left bank of the Colorado River, at record course and distance, falls on partially exposed unstable river bed. Not monumented.

47.00 Point for the original cor. of secs. 13 and 14 on the right bank of the Colorado River, at record course and distance, falls in river. Not monumented.

72.00 Point for the original meander cor. of secs. 13 and 14 on the right bank of the Colorado River, at record course and distance, falls in river. Not monumented.

N. 0° 19' E., beginning new measurement.

By triangulation, across the waters of Colorado River.

8.48 Point for the cor. of secs. 11, 12, 13 and 14, at calculated intersection of E-W and N-S sec. lines, falls in river. Not monumented.

Land, nearly level.

Soil, sandy and river silt and mud.

No timber.

Undergrowth, dense sagebrush and greasewood, willows on shallow river bed and bars.

From the cor. of secs. 7, 12, 13 and 18 on the E. bdy. of the Tp., hereinbefore described.

S. 89° 56' W., bet. secs. 12 and 13.

Over mountainous land through dense sagebrush.

By traverse, topography scaled from U.S.G.S. Quadrangle sheet "Westwater 4 SE." Desc. 80 ft. over W. slope.

13.30 Wash, drains S.; asc. abruptly about 130 ft. over sandstone ledges facing SE.

23.50 Ledgy spur slopes SW.; desc. about 160 ft. over broken NW. slope.

33.50 Draw, drains N.; asc. about 40 ft. over NE. slope.

35.00 Small spur slopes N.; desc. about 50 ft. over W. slope.

39.82 The 1/4 sec. cor. of secs. 12 and 13, monumented with a sandstone, 18x16x3 ins., set in a mound of stone and dimly mkd. 1/4 on N. face.

At the cor. point

De endent Reserve of a Portion of the Subdivision

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground to bedrock, and in a mound of stone, 3½ ft. base to top, with brass cap mkd.

T20S R25E

$$\frac{1}{2} \frac{S12}{S13}$$

Bury original stone cor. alongside iron post.

N. 89° 48' W., beginning new measurement.

Desc. 20 ft. over SW. slope.

- 1.00 Small draw, drains N.; asc. 80 ft. over NE. slope.
 4.00 Point of ledgy spur slopes N.; desc. 120 ft. over broken W. slope.
 11.50 Base of spur, bears N. and S.; thence over level bottom land through scattered cottonwood timber.
 21.12 Left bank of Colorado River bears N. 10° 44' W. and S. 10° 44' E. This point selected for witness meander cor. of secs. 12 and 13 for meander line of 1894.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground in a collar of stone to top, with brass cap mkd.

T20S R25E

$$WMC \frac{S12}{S13}$$

1963

Deposit broken glass at base of iron post.

Thence over overflow river bed land through dense willows.

- 24.42 Point for the original meander cor. of secs. 12 and 13 on the left bank at proportionate distance. Falls on partially exposed, swampy unstable river bed. Not monumented.

N. 89° 53' W., beginning new measurement.

By triangulation, across the waters of Colorado River.

- 16.10 Point for the cor. of secs. 11, 12, 13 and 14 at calculated intersection of E-W and N-S section line. Falls in river. Not monumented.

Land, mountainous, broken E. portion; level bottom land W. portion.

Soil, sandy.

Timber, scattered cottonwood along river.

Undergrowth, dense sagebrush and willows.

From the cor. of secs. 1, 6, 7 and 12, on the E. bdy. of the Tp., hereinbefore described.

N. 89° 38' W., bet. secs. 1 and 12.

Dependent Resurvey of a Portion of the Subdivision, T. 20 S., R. 25 E.

CHAINS

Over level bottom land through medium dense cottonwood timber and willows.

4.68 Point for the meander cor. of secs. 1 and 12, determined from the original bearing trees:


A cottonwood, 48 ins. diam., bears N. 12° W., 7 lks. dist.

A cottonwood, 30 ins. diam., bears S. 1° W., 18 lks. dist.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T20S R25E



Deposit broken glass at base of iron post.

S. 88° 24' W., beginning new measurement.

Continue over level accretion land through dense willows.

5.70 Old channel of Colorado River, 50 lks. wide, 6 ft. deep, drains S.

26.50 E. bank of wash, bears N. and S.

28.35 W. bank of wash, bears N. and S.


Point for the meander cor. of secs. 1 and 12 on original right bank of river at record bearing and distance from the reestablished corner of secs. 1, 2, 11 and 12, hereinafter described. Not monumented. There is no remaining evidence of the original cor.

West, beginning new measurement.

7.10 Point for the 1/4 sec. cor. of secs. 1 and 12 at record bearing and distance from the reestablished corner of secs. 1, 2, 11 and 12, hereinafter described; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. in the ground, with brass cap mkd.

T20S R25E



1963

16.00 Present bank of Colorado River bears N. 27° W. and S. 27° E. Point for meander cor. of secs. 1 and 12 on left bank of Colorado River, curves NE. and SE. Cor. not monumented. Thence by triangulation.

24.30 Right bank of Colorado River, curves NW. and SE. End triangulation.

Dependent Resurvey of a Portion of the Subdivision, T. 20 S., R. 25 E.

CHAINS

- Point for meander cor. secs. 1 and 12; not monumented.
- 24.00 Irrigation ditch, drains S., enter cultivated land.
- 28.51 Power line, bears N. 20° W. and S. 20° E.
- 34.40 Wash, 30 lks. wide, 6 ft. deep, drains SW., leave cultivated land, enter greasewood and sagebrush.
- 37.10 Trail road, bears NE. and SW.
- 40.16 Telephone line, bears N. 43° 15' E. and S. 43° 15' W.
- 40.45 Denver and Rio Grande Western Railroad, bears N. 43° 15' E. and S. 43° 15' W.; asc. 85 ft. over SE. slope.
- 47.10 Point for the cor. of secs. 1, 2, 11 and 12 at record distance longitudinally from the 1/4 sec. cor. of secs. 2 and 11 and record dist. southing from the 1/4 sec. cor. of secs. 1 and 2.
- Set an iron post, 30 ins. long, 2½ ins. diam., 4 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T20S R25E

S2	S1
S11	S12

1963

Land, level bottom E. 74.00 chs.; mountainous W. 6.00 chs.
 Soil, sandy, gravelly, E. 74.00 chs.; rocky W. 6.00 chs.
 Timber, medium dense cottonwood E. 1/2, no timber W. 1/2
 Undergrowth, dense willows E. of river; sagebrush and greasewood W. of river.

S. 0° 01' E., bet. secs. 11 and 12.

Desc. 85 ft. over broken SE. slope.

- 3.50 Base of descent, bears NE. and SW., thence over level land.
- 4.30 Road, unimproved, bears E. and W.
- 6.54 Denver and Rio Grande Western Railroad, bears N. 46° 45' E. and S. 46° 45' W.
- 7.45 Telephone line, parallels railroad.
- 9.60 Road, graded, to Westwater; parallels railroad.
- 14.11 Power line, bears N. 57° 05' E. and S. 57° 05' W.
- 40.00 Point for the 1/4 sec. and meander cor. of secs. 11 and 12 at record course and dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T20S R25E

½	
S11	S12

MC

1963

Dependent Resurvey of a Portion of the Subdivision, T. 20 S., R. 25 E.

CHAINS

Dig pits, 18x18x12 ins., N. and S. of cor., and raise a mound of earth, 3 ft. base, 1½ ft. high, W. of cor.

S. 0° 19' W., beginning new measurement.

Over level accretion land through dense willows.

30.50

Point for meander cor. of secs. 11 and 12 on present right bank of the Colorado River, bears NE. and SW. Not monumented. Continue by triangulation across the waters of Colorado River.

39.88

Point for cor. of secs. 11, 12, 13 and 14 at calculated intersection of E-W and N-S section lines. Falls in river, not monumented.

Land, level bottom.

Soil, sandy.

No timber.

Undergrowth, scattered greasewood and sagebrush and willows on newly formed accretion land.

From the cor. of secs. 1, 2, 11 and 12.

N. 0° 15' W., bet. secs. 1 and 2.

Over mountainous land through scattered timber with greasewood and sagebrush undergrowth; asc. 165 ft. over SE. slope.

5.30

Wash, 15 lks. wide, 8 ft. deep, drains SE.

10.30

Wash, 10 lks. wide, 2 ft. deep, drains SE.

17.20

Ridge, bears NE. and SW.; desc. 80 ft. over NW. slope.

29.40

Wash, 10 lks. wide, 3 ft. deep, drains NW. curving NE.

32.40

Ledge, 10 ft. high, bears NE. and SW.; desc. 90 ft. over steep NW. slope.

39.50

Wash, 10 lks. wide, 2 ft. deep, drains NE.

40.00

The 1/4 sec. cor. of secs. 1 and 2, monumented with a sandstone, 14x10x2 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone to top, with brass cap mkd.

T20S R25E

½

S2|S1

1963

Bury original stone cor. alongside iron post.

N. 0° 06' W., beginning new measurement.

Desc. 30 ft. along E. slope.

13.30

Wash, 10 lks. wide, 2 ft. deep, drains E.; asc. 60 ft. over SE. slope.

21.35

Spur slopes E., descend 65 ft. over NE. slope.

27.80

Wash, 10 lks. wide, 3 ft. deep, drains E.; asc. 50 ft. over SE. slope.

32.00

Wash, 10 lks. wide, 2 ft. deep, drains SE.

Dependent Resurvey of a Portion of the Subdivision, T. 20 S., R. 25 E.

CHAINS	
42.58	<p>The cor. of secs. 1, 2, 35 and 36, on the N. bdy. of the Tp., monumented with a 2½ in. iron post, set, mkd. and witnessed as described in the 1963 field notes of the S. bdy., T. 19 S., R. 25 E.</p> <p>Land, mountainous. Soil, sandy clay, rocky. Timber, scattered pinon and juniper. Undergrowth, scattered greasewood and sagebrush.</p>
<p>Retracement of a Portion of the Subdivision T. 20 S., R. 25 E.</p>	
<p>Retracement of the Survey Executed by Frank E. Baxter in 1894 and the Retracement made by Howard W. Miller in 1910</p>	
14.00	<p>From the cor. of secs. 13, 14, 23 and 24. N. 89° 10' W., bet. secs. 14 and 23. Over level land through dense sagebrush and greasewood. Wash, drains NE.</p>
19.98	<p>Present left bank of Colorado River bears N. 29° 15' E. and S. 29° 15' W. Point for the M. C. of sec. 23 only set an iron 30 ins. long, 24 ins. in the ground and in a collar of stone, with brass cap mkd.</p>
<p>T20S R25E MC S23 1966</p>	
39.97	<p>Point for the 1/4 sec. cor. of secs. 14 and 23 at record bearing and distance as found in 1963 has been washed away. Not monumented.</p> <p>From the true point S. 83° 05' W., beginning new measurement.</p>
4.15	<p>The meander cor. of secs. 14 and 23, monumented with a 1 in. iron post, set, mkd. and witnessed as described in the official record.</p>
<p>S. 89° 56' W., beginning new measurement.</p>	
30.77	<p>By triangulation over soft unstable accretion land through dense willows and cottonwood timber.</p> <p>Point for the meander cor. of secs. 14 and 23 on the present left bank of the Colorado River, bears N. 30° E. and S. 30° W.</p>

Retracement of a Portion of the Subdivision, T. 20 S., R. 25 E.

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 28 ins. in the ground, and in a collar of stone, with a brass cap mkd.

T20S R25E

MC / $\frac{S14}{S23}$

1966

35.79 Point for closing cor. of secs. 22 and 23, hereinafter described.

37.21 Point for cor. of secs. 14 and 15 at point of intersection of E-W sec. line with line bet. secs. 14 and 15, falls in the Colorado River.

Land, mostly level bottom land.
Soil, sandy river bottom silt.
No timber E. portion; cottonwood W. portion.
Undergrowth, greasewood, sagebrush and willows.

From the cor. of secs. 22, 23, 26 and 27, monumented with a 2 in. iron post, set, mkd. and witnessed as described in the official record.

N. $0^{\circ} 01'$ W., bet. secs. 22 and 23.

Over rolling land through scattered timber.

7.80 Wash, drains NW.; desc. 40 ft. over NW. slope.

40.02 Point for the $\frac{1}{4}$ sec. cor. of secs. 22 and 23 at proportionate distance, falls in wash in unsafe place for cor. monument.

40.74 The witness $\frac{1}{4}$ sec. cor. of secs. 22 and 23, monumented with a 1 in. iron post, set, mkd. and witnessed as described in the official record of the 1910 survey.

44.20 Wash, drains NW.

50.75 Wash, drains W.

52.50 Small spur slopes W.; desc. 80 ft. over NW. slope.

68.10 The meander cor. of secs. 22 and 23, monumented with a 1 in. iron post, set, mkd. and witnessed as described in the official record of 1910 on the present left bank of the Colorado River.

N. $0^{\circ} 02'$ W., beginning new measurement.

By triangulation, across waters of Colorado River.

12.60 Intersect S. bdy. sec. 14, at point for closing cor. of secs. 22 and 23; falls in the Colorado River.

From which

The unmonumented point for cor. of secs. 14 and 15 bears S. $89^{\circ} 56'$ W., 1.42 chs. dist.

Land, part flat, part rolling.
Soil, sandy to muddy river bottom silt.
Timber, scattered pinon and juniper.
Undergrowth, sagebrush, with dense willows on accretion land along river.

Retracement of a Portion of the Subdivision, T. 20 S., R. 25 E.

CHAINS

Dependent Resurvey of a Portion of the Subdivision
T. 20 S., R. 25 E.Reestablishment of the Survey Executed
by Frank E. Baxter in 1894.

The cor. of secs. 10, 11, 14 and 15, monumented with a sandstone, 18x6x6 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T20S R25E

S10|S11
S15|S14

1963

Bury original stone cor. alongside iron post.

S. 0° 02' W., bet. secs. 14 and 15.

Over mountainous land through scattered timber with sagebrush and greasewood undergrowth. By triangulation, asc. about 240 ft. over broken NE. slope.

31.30 End triangulation, thence along E. slope.

40.22 The 1/4 sec. cor. of secs. 14 and 15, monumented with a sandstone, 16x8x6 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long; 2½ ins. diam., 12 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T20S R25E

½
S15|S14

1963

Bury original stone cor. alongside iron post.

S. 0° 02' E., beginning new measurement.

Asc. 10 ft. along E. slope.

5.40 Top of ascent slopes E.; desc. 210 ft. over broken SE. slope.

14.84 Point selected for the witness meander cor. of secs. 14 and 15.

Dependent Resurvey of a Portion of the Subdivision, T. 20 S., R. 25 E.

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., on solid rock, and in a mound of stone, 6 ft. base to top, with brass cap mkd.

T20S R25E
 S15|S14
 ↓
 WMC
 1963

Descend abruptly about 100 ft. over sheer sandstone ledges facing SE.

16.40 Enter Colorado River at its right bank, course S. 59° W. from S. 86° 30' E., **point for meander corner secs. 14 &**

30.00 **15** Point for 1894 meander cor. of secs. 14 and 15, and witness corner to secs. 14, 15, 22 and 23, at record course and distance; falls in river and is not monumented.

40.26 Point for cor. of secs. 14 and 15 on N. bdy. of sec. 22, hereinbefore described.

Land, mostly mountainous, broken.

Soil, mostly rocky.

Timber, scattered juniper on NW. side of Colorado River.

Undergrowth, sagebrush and greasewood on NW. side of river; willows along left side of river.

From the cor. of secs. 10, 11, 14 and 15.

S. 89° 48' E., bet. secs. 11 and 14.

Over nearly level land through dense greasewood.

1.00 Road, unimproved, bears irregularly N. and S.

1.33 Fence, bears N. and S.

8.31 Powerline bears N. 2° E. and S. 2° W.

37.20 Westwater Wash, 1.20 chs. wide, 4 ft. deep, drains SE.

40.29 Point for the 1/4 sec. cor. of secs. 11 and 14 at proportionate dist., falls on low bank of Westwater Wash, subject to flood water and deemed unsafe to perpetuate; there is no remaining evidence of the original cor.

40.68 Fence, bears N. and S., and point selected for the witness 1/4 sec. cor. of secs. 11 and 14.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone to top, with brass cap mkd.

T20S R25E
 W ← S11
 C ← S14
 1963

Enter cultivated land.

61.50 Leave cultivated land, enter dense greasewood, bears N. and S.

62.25 Road, unimproved, bears NE. and S.

66.00 Right bank of Colorado River, bears N. 51° E. and S. 51° W.

Point selected for the witness meander cor. of secs. 11 and 14.

Dependent Resurvey of a Portion of the Subdivision, T. 20 S., R. 25 E.

CHAINS

- 42.70 Westwater Wash, 2.00 chs. wide, 3 ft. deep, drains SE. from NW., enter dense willows.
- 45.70 Westwater Wash, drains SW. from NE.
- 56.55 Westwater Wash, drains SE. from irregularly NW.
- 60.93 Power line, bears N. 70° W. and S. 70° E., leave willows, enter dense greasewood.
- 63.65 Road, graded, to Westwater, bears irregularly SE. and NW., asc. 175 ft. over broken SE. slope.
- 71.30 Spur, slopes SW., desc. 80 ft. over NW. slope.
- 79.98 The cor. of secs. 2, 3, 10 and 11, monumented with a sandstone, 20x12x6 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to bedrock, and in a mound of stone, 3½ ft. base to top, with brass cap mkd.

T20S R25E

S3	S2
S10	S11

1963

Bury original stone cor. alongside iron post.

Land, mountainous.

Soil, sandy, rocky.

No timber.

Undergrowth, sagebrush, willows, and greasewood.

From the cor. of secs. 1, 2, 11 and 12.

S. 89° 55' W., bet. secs. 2 and 11.

Over mountainous land through scattered sagebrush and shadscale. Asc. 55 ft. over SE. slope.

- 6.15 Spur slopes S., desc. 20 ft. over SW. slope.
- 8.00 Small draw drains S., asc. 90 ft. over broken SE. slope.
- 13.00 Spur slopes S., desc. 145 ft. over broken SW. slope.
- 21.00 Wash, 20 lks. wide, 7 ft. deep, drains SE., asc. 50 ft. over E. slope.
- 24.20 Saddle on small spur slopes SE., desc. 15 ft. over SW. slope.
- 32.40 Bottom of small, broken basin, asc. 70 ft. over SE. slope.
- 40.00 The ¼ sec. cor. of secs. 2 and 11, monumented with a sandstone, 12x8x5 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Dependent Resurvey of a Portion of the Subdivision, T. 20 S., R. 25 E.

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 4 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T20S R25E

$\frac{1}{4}$ S2
S11

1963

Bury original stone cor. in mound of stone alongside iron post.

N. $89^{\circ} 26'$ W., beginning new measurement.

Asc. 230 ft. over broken SE. slope.

12.75 Point of ridge, bears SW. and N., desc. 385 ft. over broken W. slope.

40.35 The cor. of secs. 2, 3, 10 and 11.

Land, mountainous, broken.

Soil, rocky clay loam.

No timber.

Undergrowth, scattered sagebrush and shadscale.

N. $0^{\circ} 11'$ W., bet. secs. 2 and 3.

Over mountainous land through scattered shadscale and bunch grass. Desc. 10 ft. over NE. slope.

1.30 Wash, 10 lks. wide, 1 ft. deep, drains NW., asc. 15 ft. over SW. slope.

7.70 Small spur slopes NW., desc. 15 ft. over NE. slope.

8.90 Wash, 15 lks. wide, 2 ft. deep, drains NW., asc. 10 ft. over SW. slope.

12.20 Small spur slopes W., desc. 10 ft. over N. slope.

13.50 Wash, 20 lks. wide, 3 ft. deep, drains SW., asc. 480 ft. over broken SE. slope.

27.60 Top of sandstone ledge, 60 ft. high, bears NE. and SW., asc. 40 ft. over SE. slope.

31.15 Top of ledge, 15 ft. high, bears NE. and SW., asc. 25 ft. along E. slope.

38.80 Spur slopes SW., desc. 5 ft. over NW. slope.

40.18 The $\frac{1}{4}$ sec. cor. of secs. 2 and 3, monumented with a sandstone, 18x6x6 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 8 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

Dependent Resurvey of a Portion of the Subdivision, T. 20 S., R. 25 E.

CHAINS

T20S R25E

S3|S2

1963

Bury original stone cor. alongside iron post.

N. 0° 13' W., beginning new measurement.

Desc. 100 ft. over NW. slope. Enter scattered juniper timber.

13.75 Bottom of rocky draw, drains NW. about 6.00 chs., thence W., asc. 50 ft. over SW. slope.

17.35 N. edge of draw, thence along W. slope.

21.45 Small draw, 12 ft. deep, drains W.

27.15 Spur slopes SW., desc. 65 ft. over NW. slope.

41.15 Wash, 10 lks. wide, 2 ft. deep, drains NW.

42.15 The cor. of secs. 2, 3, 34 and 35, monumented with a 2½ in. iron post, set, mkd. and witnessed as described in the 1963 field notes of the S. bdy., T. 19 S., R. 25 E.

Land, mountainous, broken.

Soil, sandy clay, rocky.

No timber S. 1/2; scattered juniper N. 1/2.

Undergrowth, scattered shadscale, sagebrush and grass.

From the cor. of secs. 26, 27, 34 and 35, monumented with a 2 in. iron post, set, mkd. and witnessed as described in the official record of the 1910 survey.

N. 89° 02' W., bet. secs. 27 and 34.

Over mountainous land through dense timber, with sagebrush, shadscale and grass undergrowth. By triangulation, asc. about 450 ft. over precipitous, ledgy E. slope.

18.06 Top of ledge, bears N. and SW. End triangulation.

The witness cor. of secs. 26, 27, 34 and 35, monumented with a (X) cut on solid sandstone, and a mound of stone, 3 ft. base, 1½ ft. high, alongside. This point will now function as a witness point only.

At the cor. point

Drill a 1 in. iron post, 12 ins. long, 8 ins. in solid sandstone, with brass cap mkd.

T20S R25E

S27|S26 W
S34|S35 P

1963

S. 89° 46' W., beginning new measurement.

Asc. 30 ft. over E. slope.

Dependent Resurvey of a Portion of the Subdivision, T. 20 S., R. 25 E

CHAINS	
5.50	Ridge, bears N. and SW., desc. 85 ft. over W. slope.
21.32	Point for the 1/4 sec. cor. of sec. 34, at midpoint bet. the cor. of secs. 26, 27, 34 and 35, and the closing cor. of secs. 33 and 34.
	<u>T20S R25E</u> $\frac{1}{2}$ S34 1963
22.41	Point selected for the witness 1/4 sec. cor. of sec. 27. Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.
	T20S R25E WC ← $\frac{1}{2}$ S27 1963
22.71	Point for the 1/4 sec. cor. of secs. 27 and 34, at proportionate dist. falls in wash, 25 lks. wide, 3 ft. deep drains SW., and deemed unsafe to perpetuate; there is no remaining evidence of the original cor. This cor. will now function as the 1/4 sec. cor. of sec. 27 only. Desc. 190 ft. over W. slope.
58.40	Wash, 70 lks. wide, 9 ft. deep, drains S.
60.70	The closing cor. of secs. 33 and 34, monumented with a 2 in. iron post, set, mkd. and witnessed as described in the official record of the 1910 survey.
62.91	The cor. of secs. 27 and 28, monumented with a 2 in. iron post, set, mkd. and witnessed as described in the official record of the 1910 survey. Land, mountainous. Soil, sandy, rocky. Timber, dense juniper. Undergrowth, sagebrush and shadscale.
	Retracement of the survey executed by Howard W. Miller in 1910.
	From the closing cor. of secs. 33 and 34.
	S. 0° 06' W., bet. secs. 33 and 34.
	Over mountainous, broken land through dense timber. Desc. 160 ft. over SE. slope.
14.50	Draw, drains SW., thence along broken W. slope.
25.00	Draw, drains W., asc. 360 ft. over NW. slope.
38.50	Point of ledgy spur slopes SW., desc. abruptly 360 ft. over precipitous S. slope.

Dependent Resurvey of a Portion of the Subdivision, T. 20 S., R. 25 E.

CHAINS

- 40.00 Point for the 1/4 sec. cor. of secs. 33 and 34 at record distance which falls on ledge and cannot be perpetuated.
- 40.55 The witness 1/4 sec. cor. of secs. 33 and 34, monumented with a 1 in. iron post, set, mkd. and witnessed as described in the official record.
Desc. 120 ft. over S. slope.
- 44.00 Draw, drains E. about 3.00 chs., thence SE., asc. 50 ft. over N. slope.
- 48.00 Point of ledgy spur slopes E., desc. 100 ft. over SE. slope.
- 53.25 The meander cor. of secs. 33 and 34, monumented with a 1 in. iron post, set, mkd. and witnessed as described in the official record.
Right bank of Colorado River, bears S. and N. 80° E.

S. 1° 47' W., beginning new measurement.
By triangulation and traverse, desc. about 200 ft. to river, thence along river.
- 26.86 True point for the standard cor. of secs. 33 and 34, falls in river, from which, the meander cor. of sec. 34, bears East, 1.51 chs. dist., monumented with a 3 in. iron post, set, mkd. and witnessed as described in the official record.

Land, mountainous, broken.
Soil, rocky, considerable exposed sandstone.
Timber, dense juniper.
Undergrowth, sagebrush.

Dependent Resurvey of a Portion of the Subdivision
T. 20 S., R. 25 E.

Reestablishment of the Survey Executed by Frank E.
Baxter in 1894.

- From the cor. of secs. 27 and 28, on the N. bdy. of sec. 33.
N. 0° 02' W., bet. secs. 27 and 28.
Over gently rolling land through dense timber.
- 23.95 Wash, 10 lks. wide, 2 ft. deep, drains W.
- 40.15 The 1/4 sec. cor. of secs. 27 and 28, monumented with a sandstone, 10x10x3 ins., set, mkd. and witnessed as described in the official record.

Dependent Resurvey of a Portion of the Subdivision, T. 20 S., R. 25 E

CHAINS

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground, and in a collar of stone to top, with brass cap mkd.

T20S R25E

½
S28 | S27
1963

Bury original stone cor. alongside iron post.

N. 0° 02' E., beginning new measurement.

20.10 Wash, 10 lks. wide, 3 ft. deep, drains NW.

25.20 Wash, 10 lks. wide, 4 ft. deep, drains W.

40.12 The cor. of secs. 21, 22, 27 and 28, monumented with a sandstone, 10x10x2 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone to top, with brass cap mkd.

T20S R25E

S21 | S22
S28 | S27
1963

Bury original stone cor. alongside iron post.

Land, gently rolling.
Soil, sandy clay.
Timber, dense juniper.
Undergrowth, sagebrush and shadscale.

Retracement of a Portion of the Subdivision
T. 20 S., R. 25 E.

Reestablishment of the Survey Executed by H. W. Miller in 1910.

From the cor. of secs. 22, 23, 26 and 27, monumented with a 2 in. iron post, set, mkd. and witnessed as described in the official record.

N. 89° 57' W., bet. secs. 22 and 27.

Over rolling land through scattered timber. Desc. 180 ft. over W. slope.

Dependent Resurvey of a Portion of the Subdivision, T. 20 S., R. 25 E.

CHAINS

25.58 The meander cor. of secs. 22 and 27, monumented with a 1 in. iron post, set, mkd. and witnessed as described in the official record of the 1910 survey.

N. 88° 08' W., beginning new measurement.

By triangulation across river.

4.94 Point for the meander cor. of secs. 22 and 27 at proportionate dist. There is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., on solid rock, and in a mound of stone, 6 ft. base to top, with brass cap mkd.

T20S R25E

$$\frac{S22}{S27} / MC$$

1963

Asc. abruptly about 480 ft. over sandstone ledges facing E.

10.40 Top of ledge, bears N. and S., desc. 10 ft. over W. slope. End triangulation.

15.39 The 1/4 sec. cor. of secs. 22 and 27, monumented with a sandstone, 14x14x3 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone to top, with brass cap mkd.

T20S R25E

$$\frac{1}{2} \frac{S22}{S27}$$

1963

Bury original stone cor. alongside iron post.

Dependent Resurvey of a Portion of the Subdivision
T. 20 S., R. 25 E.

Reestablishment of the Survey Executed by Frank E. Baxter in 1894, and the retracement made by H. W. Miller in 1910.

N. 89° 59' W., beginning new measurement.

Dependent Resurvey of a Portion of the Subdivision, T. 20 S., R. 25 E.

CHAINS	
40.07	<p>Desc. 170 ft. over gentle W. slope.</p> <p>The cor. of secs. 21, 22, 27 and 28.</p> <p>Land, mountainous. Soil, sandy clay. Timber, scattered juniper. Undergrowth, sagebrush, shadscale and grass.</p>
2.30	<p>N. 0° 08' E., bet. secs. 21 and 22.</p> <p>Over rolling desert land through medium dense timber. Asc. 10 ft. over SE. slope.</p> <p>Small spur, slopes SW., desc. 10 ft. over NW. slope.</p>
7.10	<p>Wash, 10 lks. wide, 2 ft. deep, drains SW., asc. 45 ft. over SE. slope.</p>
13.30	<p>Road, unimproved, bears E. and W., spur slopes SW., desc. 30 ft. over NW. slope.</p>
20.10	<p>Wash, 15 lks. wide, 4 ft. deep, drains W., asc. 15 ft. over SW. slope.</p>
26.60	<p>Spur slopes NW., desc. 55 ft. over NW. slope.</p>
32.30	<p>Wash, 10 lks. wide, 2 ft. deep, drains NW., asc. 30 ft. over SW. slope.</p>
34.30	<p>Spur slopes NW., desc. 15 ft. over NE. slope.</p>
37.90	<p>Wash, 5 lks. wide, 2 ft. deep, drains NW., asc. 10 ft. over SW. slope.</p>
38.10	<p>Small spur slopes NW., desc. 20 ft. over NE. slope.</p>
40.22	<p>Point for the 1/4 sec. cor. of secs. 21 and 22 at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground, and in a collar of stone to top, with brass cap mkd.</p> <p style="text-align: center;">T20S R25E ½ S21 S22 1962</p> <p>Desc. 20 ft. over NE. slope.</p>
51.45	<p>Wash, 15 lks. wide, 3 ft. deep, drains W., asc. 30 ft. over SW. slope.</p>
55.45	<p>Spur, slopes W., desc. 15 ft. over NW. slope.</p>

Dependent Resurvey of a Portion of the Subdivision, T. 20 S., R. 25 E.

CHAINS

- 63.05 Wash, 15 lks. wide, 4 ft. deep, drains SW., asc. 20 ft. over S. slope.
- 66.25 Spur, slopes W., desc. 35 ft. over NW. slope.
- 74.05 Drift fence, bears E. and W.
- 75.90 Wash, 10 lks. wide, 4 ft. deep, drains W., asc. 15 ft. over SW. slope,
- 76.75 Spur slopes W., desc. 15 ft. over NW. slope.
- 79.15 Wash, 30 lks. wide, 8 ft. deep, drains SW., asc. 10 ft. over SE. slope.
- 80.44 The cor. of secs. 15, 16, 21 and 22, monumented with a sandstone, 10x8x2 ins.; set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground, and in a collar of stone to top, with brass cap mkd.

T20S R25E

S16	S15
S21	S22

1963

Bury original stone cor. alongside iron post.

Land, rolling desert.

Soil, sandy clay.

Timber, dense to medium juniper.

Undergrowth, sagebrush and shadscale.

S. 89° 57' E., bet. secs. 15 and 22.

Over rolling land through medium dense timber. Asc. 60 ft. over W. slope.

- 16.20 Slope changes to N., asc. 5 ft. along N. slope.
- 26.10 Top of ascent, slopes N., desc. 10 ft. over NE. slope.
- 28.20 Wash, 20 lks. wide, 2 ft. deep, drains N., asc. 40 ft. over NW. slope.
- 36.75 Spur slopes N., desc. 20 ft. over NE. slope.

Dependent Resurvey of a Portion of the Subdivision, T. 20 S., R. 25 E.

CHAINS

40.21 The 1/4 sec. cor. of secs. 15 and 22, monumented with a sandstone, 18x10x3 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 16 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T20S R25E

½ $\frac{S15}{S22}$

1963

Bury original stone cor. alongside iron post.

S. 89° 50' E., beginning new measurement.

Asc. 15 ft. over gentle NW. slope.

7.20 Spur slopes N., desc. 10 ft. along N. slope.

16.20 Wash, 15 lks. wide, 4 ft. deep, drains N., asc. 20 ft. over NW. slope.

26.00 Point of spur slopes N., desc. 20 ft. over E. slope.

32.15 Top of ledge, 400 ft. high, bears N. and S., desc. abruptly.

35.93 The meander cor. of secs. 15 and 22, and the witness cor. of secs. 14, 15, monumented with a sandstone, 18x14x4 ins., set, mkd. and witnessed as described in the official record. This cor. will continue to function as meander cor. of secs. 15 and 22, and the witness cor. of secs. 14 and 15 only.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 4 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T20S R25E

$\frac{S15|S14}{22}$ WMC

1963

Bury original stone cor. alongside iron post.

Dependent Resurvey of a Portion of the Subdivision, T. 20 S., R. 25 E.

CHAINS

N. 89° 56' E., beginning new measurement.

By calculation and triangulation across the waters of Colorado River.

Center river at its right bank, course S. 3° 45' W. from N. 23° 30' W.

3.93

Point for the cor. of secs. 14 and 15 on N. bdy. of sec. 22, hereinbefore described, falls in the Colorado River.

Land, rolling for W. 76 chs.

Soil, sandy and rocky for W. 76 chs.

Timber, dense juniper for W. 76 chs.

Undergrowth, sagebrush and shadscale for W. 76 chs.

From the cor. of secs. 15, 16, 21 and 22.

North, bet. secs. 15 and 16.

Over rolling land through dense timber, with shadscale undergrowth. Desc. 180 ft. over gently rolling NW. slope.

37.70

Wash, 10 lks. wide, 2 ft. deep, drains NE.

40.09

The 1/4 sec. cor. of secs. 15 and 16, monumented with a sandstone, 16x12x3 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 16 ins. in the ground to bedrock, and in a collar of stone to top, with brass cap mkd.

T20S R25E

½

S16|S15

1963

Bury original stone cor. alongside iron post.

N. 0° 02' E., beginning new measurement.

Desc. 15 ft. over NW. slope.

4.07

Road, unimproved, bears NE. and SW.

8.20

Wash, 10 lks. wide, 3 ft. deep, drains E., asc. 20 ft. over S. slope.

Dependent Resurvey of a Portion of the Subdivision, T. 20 S., R. 25 E.

CHAINS

- 12.35 Spur slopes E., desc. 100 ft. over N. slope.
 - 18.65 Wash, 10 lks. wide, 3 ft. deep, drains NW., desc. 35 ft. over gently rolling N. slope.
 - 29.52 Power line, bears E. and W.
 - 32.62 Fence, bears E. and W.
 - 34.52 Telephone line, bears E. and W.
 - 35.60 Road, unimproved, bears E. and W.
 - 36.00 Denver and Rio Grande Western Railroad, curves NE. and NW.
 - 40.32 The cor. of secs. 9, 10, 15 and 16, monumented with a sandstone, 18x12x6 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone to top, with brass cap mkd.

T20S R25E

 S9|S10
 S16|S15

 1963

Bury original stone cor. alongside iron post.

Land, rolling desert.
Soil, sandy clay.
Timber, scattered juniper.
Undergrowth, shadscale.
-
- From the cor. of secs. 10, 11, 14 and 15.
S. 89° 16' W., bet. secs. 10 and 15.
Over mountainous land through scattered timber, with shadscale and sagebrush undergrowth. Asc. 135 ft. over broken E. slope.
 - 3.50 Top of ledge, 10 ft. high, bears N. and S., asc. 10 ft. over gentle E. slope.
 - 9.60 Ridge, bears N. and S., desc. 35 ft. along gentle N. slope.
 - 15.25 Wash, 40 lks. wide, 10 ft. deep, drains N.

Dependent Resurvey of a Portion of the Subdivision, T. 20 S., R. 25 E.

CHAINS

30.00	Wash, 15 lks. wide, 3 ft. deep, drains N.
37.60	Wash, 10 lks. wide, 2 ft. deep, drains N.
39.48	The 1/4 sec. cor. of secs. 10 and 15, monumented with a sandstone, 16x8x4 ins., set, mkd. and witnessed as described in the official record.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground, and in a collar of stone to top, with brass cap mkd.
	T20S R25E
	¼ $\frac{S10}{S15}$
	1963
	Bury original stone cor. alongside iron post.
	N. 89° 10' W., beginning new measurement.
	Over gently rolling land.
2.80	Wash, 10 lks. wide, 3 ft. deep, drains N.
14.00	Road, unimproved, bears S., NE. and irregularly W.
20.00	Road, unimproved, bears NE. and SW.
22.00	Telephone line, bears N. 56° 10' E. and S. 56° 10' W.
22.75	Power line, bears N. 58° 55' E. and S. 58° 55' W.
24.15	Denver and Rio Grande Western Railroad, bears N. 58° 55' E., and curves SW.
30.00	Wash, 25 lks. wide, 4 ft. deep, drains N.
40.82	The cor. of secs. 9, 10, 15 and 16.
	Land, rolling. Soil, sandy clay. Timber, scattered juniper. Undergrowth, shadscale.
	N. 0° 02' E., bet. secs. 9 and 10.
	Over mountainous land through scattered juniper timber. Desc. 15 ft. over NW. slope.

Dependent Resurvey of a Portion of the Subdivision, T. 20 S., R. 25 E.

CHAINS

- 3.00 Wash, 20 lks. wide, 4 ft. deep, drains SE., asc. 350 ft. over rocky SE. slope.
- 18.25 Point of spur slopes E., desc. 310 ft. over rocky NE. slope.
- 37.15 Wash, drains irregularly E., asc. 50 ft. over S. slope.
- 40.06 Point for the 1/4 sec. cor. of secs. 9 and 10 at proportionate dist.; there is no remaining evidence of the original cor.
- Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.
- T20S R25E
½
S9|S10
1963
- Asc. 70 ft. over rocky S. slope.
- 43.30 Spur slopes E., desc. 45 ft. over N. slope.
- 49.25 Gulch, drains E., asc. 130 ft. over SW. slope.
- 70.20 Point of ledge, 20 ft. high, bears NW. and SE.
- 74.40 Road, unimproved, bears NW. and SE.
- 80.12 The cor. of secs. 3, 4, 9 and 10, monumented with a sandstone, 18x8x7 ins., set, mkd. and witnessed as described in the official record.
- At the cor. point
- Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to bedrock, and in a mound of stone, 3½ ft. base to top, with brass cap mkd.
- T20S R25E
S4|S3
S9|S10
1963
- Bury original stone cor. alongside iron post.
- Land, mountainous.
Soil, rocky.
Timber, scattered juniper.
Undergrowth, shadscale and sagebrush.

Dependent Resurvey of a Portion of the Subdivision, T. 20 S., R. 25 E.

CHAINS

From the cor. of secs. 2, 3, 10 and 11.

N. 89° 48' W., bet. secs. 3 and 10.

Over mountainous land through shadscale and greasewood undergrowth. Asc. 15 ft. over NE. slope.

- 1.45 Small spur slopes NW., desc. 100 ft. over gentle NW. slope
- 21.45 Enter dense greasewood.
- 21.76 Power line, bears N. 18° 20' W. and S. 18° 20' E.
- 25.35 Road to Westwater, graded gravel, bears irregularly NW. and SE.
- 25.85 Wash, 30 lks. wide, 10 ft. deep, drains SW.
- 33.95 Westwater Wash, 1.70 chs. wide, 6 ft. deep, drains irregularly SE.
- 40.18 Point for the 1/4 sec. cor. of secs. 3 and 10 at proportionate dist.; there is no remaining evidence of the original cor.
- Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone to top, with brass cap mkd.
- T20S R25E
- ¼ $\frac{S3}{S10}$
- 1963
- Asc. 330 ft. over steep, rocky E. slope.
- 43.85 Leave greasewood, bears N. and S.
- 56.05 Point of rocky spur slopes SE., asc. 20 ft. along S. slope. Enter scattered timber.
- 65.45 Spur slopes S., desc. 85 ft. over SW. slope.
- 80.36 The cor. of secs. 3, 4, 9 and 10.
- Land, mountainous.
Soil, rocky.
Timber, scattered juniper W. portion; no timber E. portion.
Undergrowth, shadscale, dense greasewood E. portion; shadscale W. portion.

Dependent Resurvey of a Portion of the Subdivision, T. 20 S., R. 25 E.

CHAINS

N. 0° 04' W., bet. secs. 3 and 4.

Over rolling desert land through scattered juniper timber; asc. 50 ft. over SW. slope.

6.30 Spur slopes SW., desc. 80 ft. over gentle NW. slope.

7.70 Trail road, bears irregularly E. and W.

30.90 Wash, 5 lks. wide, 3 ft. deep, drains NW.

29.10 Wash, 10 lks. wide, 1 ft. deep, drains NW.

40.11 The 1/4 sec. cor. of secs. 3 and 4, monumented with a sandstone, 24x14x2 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T20S R25E

½
S4|S3

1963

Bury original stone cor. alongside iron post.

N. 0° 08' W., beginning new measurement.

Desc. 105 ft. over gentle NW. slope.

6.75 Leave timber.

37.40 Point of ridge, bears S. and W., desc. 135 ft. over steep N. slope.

39.22 The witness cor. of secs. 3, 4, 33 and 34, monumented with a 2½ in. iron post, set, mkd. and witnessed as described in the 1963 field notes of the S. bdy., T. 19 S., R. 25 E.

Enter Westwater Wash and dense willows.

42.11 True point for the cor. of secs. 3, 4, 33 and 34.

Land, rolling desert.

Soil, clay loam, rocky.

Timber, scattered juniper S. portion; no timber N. portion.

Undergrowth, dense shadscale, with dense willows and greasewood along Westwater Wash.

Dependent Resurvey of a Portion of the Subdivision, T. 20 S., R. 25 E.

CHAINS	From the standard cor. of secs. 32 and 33, on the S. bdy. of the Tp., monumented with a 3 in. iron post, set, mkd. and witnessed as described in the official record of the 1910 survey. N. 0° 03' E., bet. secs. 32 and 33.
7.55	Over gently rolling land through scattered juniper timber and scattered sagebrush, shadscale and grass. Asc. 20 ft. over S. slope. Ridge, bears E. and W., desc. 95 ft. over gentle N. slope.
40.13	Point for the 1/4 sec. cor. of secs. 32 and 33, at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone to top, with brass cap mkd. T20S R25E $\frac{1}{2}$ S32 S33 1963 Desc. 65 ft. over gentle N. slope.
68.25	Wash, drains NE., asc. 25 ft. over SE. slope.
72.85	Trail road, bears N. 20° E. and S. 15° W.
78.65	Small spur slopes NE., desc. 10 ft. over N. slope.
80.26	The cor. of secs. 28, 29, 32 and 33, monumented with a wood post, 3x3 ins., 2 ft. long, badly deteriorated. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T20S R25E $\frac{S29}{S32}$ $\frac{S28}{S33}$ 1963 Bury original post cor. alongside iron post, and raise a mound of stone, 3' ft. base, 1½ ft. high, W. of cor. Land, gently rolling. Soil, sandy clay. Timber, scattered juniper. Undergrowth, shadscale, sagebrush, and grass.
	From the cor. of secs. 27 and 28. N. 89° 59' W., bet. secs. 28 and 33. Over rolling, broken land through scattered juniper timber. Desc. 160 ft. over NW. slope.

Dependent Resurvey of a Portion of the Subdivision, T. 20 S., R. 25 E.

CHAINS	
21.70	Wash, 20 lks. wide, 4 ft. deep, drains NW.
32.30	Wash, 1.70 chs. wide, 20 ft. deep, drains SW., asc. 40 ft. over SE. slope.
34.30	Small spur slopes S., desc. 40 ft. over W. slope.
40.08	The 1/4 sec. cor. of secs. 28 and 33, monumented with a sandstone, 14x12x3 ins., set, mkd. and witnessed as described in the official record.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to bedrock, and in a mound of stone, 3½ ft. base to top, with brass cap mkd.
	T20S R25E
	½ $\frac{S28}{S33}$
	1963
	Bury original stone cor. alongside iron post.
	N. 89° 41' W., beginning new measurement.
	Desc. 20 ft. over W. slope.
4.95	Wash, 1.10 chs. wide, 10 ft. deep, drains S., asc. 70 ft. over E. slope.
24.70	Top of ascent, slopes S., desc. 10 ft. over SW. slope.
27.00	Wash, 20 lks. wide, 4 ft. deep, drains NE., asc. 40 ft. over SE. slope.
35.50	Trail road, bears N. 20° E. and S. 20° W.
38.55	Small spur slopes NE., desc. 10 ft. over NW. slope.
40.26	The cor. of secs. 28, 29, 32 and 33.
	Land, rolling and broken. Soil, sandy clay and rocky. Timber, scattered juniper. Undergrowth, shadscale, sagebrush and grass.
	N. 0° 09' E., bet. secs. 28 and 29.
	Over gently rolling land through scattered juniper timber and dense grass, with scattered shadscale, greasewood and cacti.
19.90	Trail road, bears irregularly NW. and SE.
39.98	The 1/4 sec. cor. of secs. 28 and 29, monumented with a sandstone, 18x14x6 ins., set, mkd. and witnessed as described in the official record.

Dependent Resurvey of a Portion of the Subdivision, T. 20 S., R. 25 E.

CHAINS

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground, and in a collar of stone to top, with brass cap mkd.

T20S R25E

$\frac{1}{2}$
S29|S28
1963

Bury original stone cor. alongside iron post.

N. $0^{\circ} 03'$ E., beginning new measurement.

16.85 Wash, 30 lks. wide, 3 ft. deep, drains W.

40.16 The cor. of secs. 20, 21, 28 and 29, monumented with a sandstone, 20x10x4 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground, and in a collar of stone to top, with brass cap mkd.

T20S R25E

S20|S21
S29|S28
1963

Bury original stone cor. alongside iron post.

Land, gently rolling.

Soil, clay.

Timber, scattered juniper.

Undergrowth, sagebrush, shadscale, greasewood and cacti.

From the cor. of secs. 21, 22, 27 and 28.

N. $89^{\circ} 55'$ W., bet. secs. 21 and 28.

Over rolling desert land through scattered juniper, with greasewood and sagebrush undergrowth.

4.00 Wash, 20 lks. wide, 4 ft. deep, drains SW.

19.50 Wash, 20 lks. wide, 3 ft. deep, drains SW.

39.93 The $\frac{1}{4}$ sec. cor. of secs. 21 and 28, monumented with a sandstone, 20x12x2 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, and in a collar of stone to top, with brass cap mkd.

Dependent Resurvey of a Portion of the Subdivision, T. 20 S., R. 25 E.

CHAINS

T20S R25E

$$\frac{1}{4} \frac{S21}{S28}$$

1963

Bury original stone cor. alongside iron post.

 N. 89° 53' W., beginning new measurement.

- 0.72 Trail road, bears irregularly N. and S.
 40.17 The cor. of secs. 20, 21, 28 and 29.

Land, rolling desert.
 Soil, sandy clay.
 Timber, scattered juniper.
 Undergrowth, sagebrush and greasewood.

N. 0° 03' E., bet. secs. 20 and 21.

Over rolling land through scattered juniper timber, with
 sagebrush, greasewood, and shadscale undergrowth. Asc.
 10 ft. over SE. slope.

- 7.50 Small spur slopes SW., desc. 10 ft. over NW. slope.
 17.70 Small draw, drains SW., asc. 40 ft. over SE. slope.
 35.35 Spur, slopes SW., desc. 15 ft. over NW. slope.
 40.25 Point for the 1/4 sec. cor. of secs. 20 and 21 at pro-
 portionate dist.; there is no remaining evidence of the
 original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins.
 in the ground, and in a collar of stone to top, with
 brass cap mkd.

T20S R25E

$$\frac{1}{4} \frac{S20}{S21}$$

1963

Desc. 55 ft. over NW. slope.

- 49.30 Wash, 30 lks. wide, 8 ft. deep, drains W.
 55.30 Wash, 20 lks. wide, 4 ft. deep, drains SW., asc. 40 ft.
 over SE. slope.
 61.45 Spur slopes SW., desc. 30 ft. over NW. slope.
 66.00 Wash, drains SW., asc. 30 ft. over S. slope.
 69.50 Spur slopes W., desc. 25 ft. over N. slope.
 74.95 Wash, 70 lks. wide, 8 ft. deep, drains W., asc. 50 ft.
 over SW. slope.
 78.20 Spur slopes NW., desc. 50 ft. over NE. slope.

Dependent Resurvey of a Portion of the Subdivision, T. 20 S., R. 25 E.

CHAINS

80.50

Point for the cor. of secs. 16, 17, 20 and 21 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T20S R25E

S17	S16
S20	S21

1963

Land, rolling.

Soil, sandy clay, rocky.

Timber, scattered juniper.

Undergrowth, sagebrush, greasewood and shadscale.

From the cor. of secs. 15, 16, 21 and 22.

West, bet. secs. 16 and 21.

Over broken, rolling land through medium dense juniper timber. Desc. 80 ft. over W. slope.

17.75

Wash, 1.00 ch. wide, 2 ft. deep, drains N., asc. 30 ft. over E. slope.

20.50

Trail road, bears N. 20° E. and S. 20° W.

40.17

The $\frac{1}{4}$ sec. cor. of secs. 16 and 21, monumented with a sandstone, 14x10x3 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground, and in a collar of stone to top, with brass cap mkd.

T20S R25E

$\frac{1}{4}$	S16
	S21

1963

Bury original stone cor. alongside iron post.

N. $89^\circ 59'$ W., beginning new measurement.

Asc. 10 ft. along N. slope.

10.55

Spur slopes N., desc. 55 ft. over W. slope.

17.45

Wash, 30 lks. wide, 4 ft. deep, drains N., asc. 110 ft. over E. slope.

29.60

Spur slopes N., desc. 40 ft. over NW. slope.

40.17

The cor. of secs. 16, 17, 20 and 21.

Land, rolling.

Soil, sandy clay.

Timber, medium dense to scattered juniper.

Undergrowth, sagebrush and shadscale.

Dependent Resurvey of a Portion of the Subdivision, T. 20 S., R. 25 E.

CHAINS

N. 0° 02' W., bet. secs. 16 and 17.

Over broken rolling land through scattered timber and undergrowth. Desc. 100 ft. over NE. slope.

13.15 Wash, 40 lks. wide, 4 ft. deep, drains NW., asc. 15 ft. over S. slope.

15.55 Spur slopes E., desc. 30 ft. over N. slope.

27.25 Wash, 80 lks. wide, 7 ft. deep, drains E., asc. 70 ft. over S. slope.

40.25 The 1/4 sec. cor. of secs. 16 and 17, monumented with a sandstone, 12x8x3 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, and in a collar of stone to top, with brass cap mkd.

T20S R25E

1/2
S17 | S16
1963

Bury original stone cor. alongside iron post.

Cor. set on small spur slopes W.

N. 0° 02' W., beginning new measurement.

Desc. 100 ft. over NW. slope.

19.10 Wash, 30 lks. wide, 3 ft. deep, drains NW.

24.30 Wash, 40 lks. wide, 6 ft. deep, drains W.; asc. 125 ft. over SE. slope.

27.90 Small spur slopes W., desc. 120 ft. over NW. slope.

37.45 Wash, 80 lks. wide, 7 ft. deep, drains NW.

38.00 Trail road, bears NE. and SW.

40.10 Point for the cor. of secs. 8, 9, 16 and 17 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 4 ins. in the ground to bedrock, and in a mound of stone, 3 1/2 ft. base to top, with brass cap mkd.

T20S R25E

S8 | S9
S17 | S16
1963

Land, rolling, broken.

Soil, rocky clay.

Timber, scattered juniper.

Undergrowth, sagebrush and greasewood.

From the cor. of secs. 9, 10, 15 and 16.

N. 89° 59' W., bet. secs. 9 and 16.

Over rolling land through scattered juniper timber with sagebrush and greasewood undergrowth. Desc. 15 ft. over NW. slope.

8.00 Wash, 20 lks. wide, 3 ft. deep, drains NE., asc. 65 ft. over NE. slope.

Dependent Resurvey of a Portion of the Subdivision, T. 20 S., R. 25 E.

CHAINS

- 17.50 Denver and Rio Grande Western Railroad, bears NW. and curves E.
- 18.20 Road, unimproved, bears irregularly E. and W.
- 19.08 Power line, bears NW. and curves E.
- 23.90 Same road, bears irregularly E. and W.
- 38.00 Same road, bears irregularly E. and W.
- 40.21 The 1/4 sec. cor. of secs. 9 and 16, monumented with a sandstone, 18x8x3 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.

T20S R25E
 1/4 S9
 S16
 1963

Bury original stone cor. alongside.
No accessories available.

N. 89° 55' W., beginning new measurement.
Asc. 65 ft. over NE. slope.

- 38.65 Road, unimproved, bears irregularly NE. and SW.
- 40.13 The cor. of secs. 8, 9, 16 and 17.

Land, rolling.
Soil, sandy clay.
Timber, scattered juniper.
Undergrowth, sagebrush and greasewood.

N. 0° 04' E., bet. secs. 8 and 9.
Over mountainous land through scattered juniper. Desc. over N. slope.

- 18.60 Trail road, bears irregularly E. and W.
- 20.07 Power line, parallels railroad.
- 20.87 Denver and Rio Grande Western Railroad bears S. 82° 04' E. and N. 82° 04' W.
- 22.10 Wash, drains W., asc. 280 ft. over steep S. slope.
- 33.75 Rim of mesa bears irregularly E. and W., desc. 45 ft. over gentle N. slope. Enter medium dense juniper timber.
- 40.10 The 1/4 sec. cor. of secs. 8 and 9, monumented with a sandstone, 16x12x5 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 16 ins. in the ground, and in a collar of stone to top, with brass cap mkd.

T20S R25E
 S8|S9
 1963

Dependent Resurvey of a Portion of the Subdivision, T. 20 S., R. 25

CHAINS

Bury original stone cor. alongside iron post.

N. 0° 04' W., beginning new measurement.

Desc. 200 ft. over gentle N. slope of mesa.

40.09 The cor. of secs. 4, 5, 8 and 9, monumented with a sandstone, 16x12x4 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone to top, with brass cap mkd.

T20S R25E

S5	S4
S8	S9

1963

Bury original stone cor. alongside iron post.

Land, mountainous.

Soil, rocky clay.

Timber, scattered juniper S. portion; medium juniper N. portion.

Undergrowth, sagebrush, shadscale, and greasewood.

From the cor. of secs. 3, 4, 9 and 10.

N. 89° 56' W., bet. secs. 4 and 9.

Over rolling N. slope of mesa, through scattered to medium dense juniper. Asc. 40 ft. over gentle SE. slope.

14.40 Jeep trail bears NW. and SE.

16.00 Spur slopes NE., desc. 50 ft. over gentle NW. slope.

40.20 The ¼ sec. cor. of secs. 4 and 9, monumented with a sandstone, 15x6x3 ins.; set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T20S R25E

¼	S4	
	S9	

1963

Bury original stone cor. alongside iron post.

N. 89° 56' W., beginning new measurement. Desc. 45 ft. over gently rolling NW. slope.

28.00 Trail road bears irregularly N. and S.

30.00 Low spur slopes NE., desc. gentle NW. slope.

40.30 The cor. of secs. 4, 5, 8 and 9.

Dependent Resurvey of a Portion of the Subdivision, T. 20 S., R. 25 E.

CHAINS

Land, gently rolling N. slope of mesa.
Soil, rocky clay.
Timber, scattered to medium dense juniper.
Undergrowth, sagebrush and shadscale.

N. 0° 03' W., bet. secs. 4 and 5.

Over broken, rolling land through medium dense juniper.
Desc. 175 ft. over NW. slope.

4.90 Leave timber; enter dense greasewood, shadscale and sagebrush.

18.10 Trail road, bears E. and W.

35.20 Wash, 20 lks. wide, 4 ft. deep, drains NW.

40.11 Point for the 1/4 sec. cor. of secs. 4 and 5 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone to top, with brass cap mkd.

T20S R25E

½
S5 | S4
1963

42.40 Wash, 30 lks. wide, 7 ft. deep, drains NE., asc. 15 ft. over SE. slope.

59.80 Spur slopes NE., desc. 60 ft. over NW. slope.

81.91 The cor. of secs. 4, 5, 32 and 33, on the N. bdy. of the Tp., monumented with a 2½ in. iron post, set, mkd. and witnessed as described in the 1963 field notes of the S. bdy. of T. 19 S., R. 25 E.

Land, broken, rolling.
Soil, rocky clay.
Timber, medium dense juniper.
Undergrowth, dense greasewood, shadscale and sagebrush.

From the standard cor. of secs. 31 and 32 on the S. bdy. of the Tp., monumented with a 3 in. iron post, set, mkd. and witnessed as described in the official record of the 1910 survey.

N. 0° 04' W., bet. secs. 31 and 32.

Over mountainous land through widely scattered juniper timber. Asc. 5 ft. over S. slope.

0.85 Spur slopes SW., desc. 130 ft. over steep NW. slope.

13.20 Ledgy wash, 60 lks. wide, 10 ft. deep, drains SW., asc. 135 ft. over SE. slope over solid sandstone.

Dependent Resurvey of a Portion of the Subdivision, T. 20 S., R. 25 E.

CHAINS	
18.15	Top of ledge, 10 ft. high, bears NE. and SW., asc. gentle SE. slope.
21.25	Sandy spur slopes SW., desc. 45 ft. over gentle NW. slope
40.11	Point for the 1/4 sec. cor. of secs. 31 and 32 at proportionate dist.; there is no remaining evidence of the original cor.
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T20S R25E $\frac{1}{2}$ S31 S32 1963
	Deposit glass at base of iron post.
	Desc. 40 ft. over gentle NW. slope.
46.45	Wash, 30 lks. wide, 6 ft. deep, drains W., asc. 70 ft. over S. slope.
58.05	Sandy spur slopes W., desc. 95 ft. over NW. slope.
71.20	Wash, 15 lks. wide, 2 ft. deep, drains W., asc. 15 ft. over SW. slope.
72.45	Small spur slopes W., desc. 20 ft. over NW. slope.
80.22	Point for the cor. of secs. 29, 30, 31 and 32 at proportionate dist.; there is no remaining evidence of the original cor.
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone to top, with brass cap mkd.
	T20S R25E $\frac{S30}{S31}$ $\frac{S29}{S32}$ 1963
	Land, mountainous and rolling. Soil, sandy. Timber widely scattered juniper. Undergrowth, shadscale, sagebrush and grass.
	From the cor. of secs. 28, 29, 32 and 33.
	N. 89° 55' W., bet. secs. 29 and 32.
	Over rolling desert land through widely scattered juniper timber and sagebrush and shadscale undergrowth. Desc. 10 ft. along N. slope.
20.20	Slope changes, desc. 55 ft. over W. slope.
28.20	Wash, 20 lks. wide, 3 ft. deep, drains SW., desc. 40 ft. over SW. slope.
40.03	Point for the 1/4 sec. cor. of secs. 29 and 32 at proportionate dist.; there is no remaining evidence of the original cor.

Dependent Resurvey of a Portion of the Subdivision, T. 20 S., R. 25 E.

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, and in a collar of stone to top, with brass cap mkd.

T20S R25E

$\frac{1}{2}$ S29
S32

1963

Desc. 60 ft. over SW. slope.

45.50 Leave timber, enter dense grass and cacti.

47.70 Wash, 80 lks. wide, 8 ft. deep, drains NW.

80.05 The cor. of secs. 29, 30, 31 and 32.

Land, rolling desert.

Soil, sandy.

Timber, widely scattered juniper.

Undergrowth, grass and cacti.

S. $89^{\circ} 56'$ W., bet. secs. 30 and 31.

Over gently rolling desert land through widely scattered juniper timber, with dense grass and shadscale undergrowth. Desc. 85 ft. over gentle W. slope.

32.35 Wash, 10 lks. wide 2 ft. deep, drains irregularly S. 80° W.

40.09 The $\frac{1}{4}$ sec. cor. of secs. 30 and 31, monumented with a sandstone, $12 \times 8 \times 5$ ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins. in the ground, and in a mound of stone, $3\frac{1}{2}$ ft. base to top, with brass cap mkd.

T20S R25E

S30
S31

1963

Bury original stone cor. alongside iron post.

N. $89^{\circ} 57'$ W., beginning new measurement.

Desc. 70 ft. over gentle W. slope.

3.40 Wash, 10 lks. wide, 2 ft. deep, drains S. 20° W.

19.25 Wash, 20 lks. wide, 3 ft. deep, drains SW.

24.76 East bank of Cottonwood Wash, bears N. and S.

27.35 West bank of Cottonwood Wash, bears N. and S., asc. 30 ft. over gentle E. slope.

39.95 The cor. of secs. 25, 30, 31 and 36, on the W. bdy. of the Tp., hereinbefore described.

Dependent Resurvey of a Portion of the Subdivision, T. 20 S., R. 25 E.

CHAINS

Land, rolling desert.
Soil, sandy.
Timber, widely scattered juniper E. 1/2; no timber W. 1/2
Undergrowth, shadscale, greasewood, grass, with tamarack
along Cottonwood Wash.

From the cor. of secs. 29, 30, 31 and 32.

N. 0° 03' E., bet. secs. 29 and 30.

Over gently rolling desert land through widely scattered
juniper timber with shadscale and grass undergrowth.

18.65 Wash, 50 lks. wide, 4 ft. deep, drains irregularly W.,
asc. 20 ft. over S. slope.

21.20 Small spur slopes W., desc. 30 ft. over N. slope.

28.60 Wash, 10 lks. wide, 3 ft. deep, drains W., asc. 30 ft.
over S. slope.

32.10 Small spur slopes W., desc. 20 ft. over N. slope.

37.50 Wash, 35 lks. wide, 4 ft. deep, drains irregularly W.,
asc. 20 ft. over S. slope.

40.11 Point for the 1/4 sec. cor. of secs. 29 and 30 at pro-
portionate dist., there is no remaining evidence of the
original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins.
in the ground, and in a collar of stone to top, with
brass cap mkd.

T20S R25E

½
S30 | S29

1963

Continue over series of small spurs sloping W.

54.00 Wash, 30 lks. wide, 3 ft. deep, drains W.

56.70 Wash, 10 lks. wide, 3 ft. deep, drains W.

64.10 Wash, 15 lks. wide, 3 ft. deep, drains N. 80° W.

70.20 Wash, 10 lks. wide, 2 ft. deep, drains W.

73.80 Trail road, bears irregularly E. and W.

78.10 Wash, 20 lks. wide, 2 ft. deep, drains W.

80.22 The cor. of secs. 19, 20, 29 and 30, monumented with a
sandstone, 20x14x3 ins., set, mkd. and witnessed as
described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 15 ins.
in the ground, and in a mound of stone, 3 ft. base to
top, with brass cap mkd.

Dependent Resurvey of a Portion of the Subdivision, T. 20 S., R. 25 E.

CHAINS

T20S R25E

S19	S20
S30	S29

1963

Bury original stone cor. alongside iron post.

Land, gently rolling desert.

Soil, sandy clay.

Timber, widely scattered juniper.

Undergrowth, shadscale, grass and scattered greasewood.

From the cor. of secs. 20, 21, 28 and 29.

N. 89° 48' W., bet. secs. 20 and 29.

Over rolling desert land through widely scattered juniper timber with sagebrush and greasewood undergrowth. Desc. 120 ft. over W. slope.

24.20 Wash, 30 lks. wide, 10 ft. deep, drains S. 30° W.

37.66 The 1/4 sec. cor. of secs. 20 and 29, monumented with a sandstone, 30x14x4 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone to top, with brass cap mkd.

T20S R25E

S20
S29

1963

Bury original stone cor. alongside iron post.

N. 89° 58' W., beginning new measurement.

Desc. 155 ft. over W. slope.

42.45 The cor. of secs. 19, 20, 29 and 30.

Land, rolling desert.

Soil, sandy clay, rocky.

Timber, scattered juniper.

Undergrowth, scattered greasewood and sagebrush.

N. 89° 59' W., bet. secs. 19 and 30.

Over gently rolling desert land through greasewood and shadscale.

3.90 Wash, 5 lks. wide, 2 ft. deep, drains SW.

10.95 Wash, 10 lks. wide, 3 ft. deep, drains SW.

Dependent Resurvey of a Portion of the Subdivision, T. 20 S., R. 25 E.

CHAINS	
25.15	Trail road, bears irregularly E. and W.
31.85	Wash, 20 lks. wide, 6 ft. deep, drains SW.
32.00	Same trail road, bears irregularly E. and W.
40.10	The 1/4 sec. cor. of secs. 19 and 30, monumented with a sandstone, 12x5x3 ins., set, mkd. and witnessed as described in the official record.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone to top, with brass cap mkd.
	T20S R25E
	$\frac{1}{2} \frac{S19}{S30}$
	1963
	Bury original stone cor. alongside iron post.

	S. 89° 52' W., beginning new measurement.
7.75	Trail road, bears NE. and SW.
8.99	Power line, bears S. 49° 15' W. and N. 49° 15' E.
20.00	Trail road, bears NW. and SE.
28.00	Wash, 25 lks. wide, 8 ft. deep, drains S.
39.88	The cor. of secs. 19, 24, 25 and 30, on the W. bdy. of the Tp., monumented with a 3 in. iron post, set, mkd. and witnessed as described in the official record.
	Land, gently rolling desert.
	Soil, sandy clay.
	No timber.
	Undergrowth, greasewood and shadscale.
	From the cor. of secs. 19, 20, 29 and 30.
	N. 0° 03' E., bet. secs. 19 and 20.
	Over gently rolling desert land through widely scattered juniper timber, with grass, sagebrush and greasewood undergrowth. Desc. 30' ft. over NW. slope.
9.70	Wash, 20 lks. wide, 4 ft. deep, drains SW.
12.20	Wash, 10 lks. wide, 2 ft. deep, drains SW., asc. 60 ft. over S. slope.
16.85	Spur slopes W., desc. 25 ft. over NW. slope.
39.45	Wash, 20 lks. wide, 4 ft. deep, drains W.
40.25	The 1/4 sec. cor. of secs. 19 and 20, monumented with a sandstone, 16x8x5 ins., set, mkd. and witnessed as described in the official record.
	At the cor. point

Dependent. Resurvey of a Portion of the Subdivision, T. 20 S., R. 25 E.

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, and in a collar of stone to top, with brass cap mkd.

T20S R25E

$\frac{1}{2}$
S19 | S20

1963

Bury original stone cor. alongside iron post.

North, beginning new measurement.

Asc. 95 ft. over SE. slope.

5.20 Power line bears S. $57^{\circ} 45'$ W. and N. $57^{\circ} 45'$ E.

7.60 Trail road, bears NE. and SW.

23.75 Spur slopes S. 85° E.

28.65 Wash, 30 lks. wide, 2 ft. deep, drains irregularly W., desc. 85 ft. over NW. slope.

40.13 The cor. of secs. 17, 18, 19 and 20, monumented with a sandstone, $16 \times 8 \times 4$ ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., 16 ins. in the ground, and in a collar of stone to top, with brass cap mkd.

T20S R25E

S18 | S17
S19 | S20

1963

Bury original stone cor. alongside iron post.

Land, gently rolling desert.

Soil, sandy clay.

Timber, widely scattered juniper.

Undergrowth, grass, sagebrush and greasewood.

From the cor. of secs. 16, 17, 20 and 21.

N. $89^{\circ} 48'$ W., bet. secs. 17 and 20.

Over rolling mountainous land through scattered juniper timber with shadscale undergrowth. Asc. 60 ft. over NE. slope.

7.75 Spur slopes NW., desc. 135 ft. over SW. slope.

40.18 The $\frac{1}{4}$ sec. cor. of secs. 17 and 20, monumented with a sandstone, $10 \times 8 \times 6$ ins., set, mkd. and witnessed as described in the official record.

At the cor. point

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground, and in a collar of stone to top, with brass cap mkd.

T20S R25E

½ $\frac{S17}{S20}$

1963

Bury original stone cor. alongside iron post.

S. 89° 56' W., beginning new measurement.

Asc. 125 ft. over SE. slope.

- 1.65 Power line, bears N. 47° 30' E. and S. 47° 30' W.
- 3.60 Trail road, bears N. and S.
- 13.95 Top of ascent, bears NW. and SE., desc. 140 ft. over steep NW. slope.
- 24.20 Base of steep descent, bears NE. and SW., desc. 30 ft. over gentle NW. slope.
- 33.50 Wash, 15 lks. wide, 3 ft. deep, drains NW.
- 40.09 The cor. of secs. 17, 18, 19 and 20.

Land, mountainous, rolling.
Soil, rocky clay.
Timber, scattered juniper.
Undergrowth, shadscale.

S. 89° 57' W., bet. secs. 18 and 19.

Over rolling mountainous land through shadscale and sagebrush undergrowth.

Desc. 40 ft. over NW. slope.

- 4.04 Telephone line, bears N. 50° E. and S. 50° W.
- 5.00 Levee of abandoned railroad track, bears N. 50° E. and S. 50° W.
- 15.05 Wash, 30 lks. wide, 3 ft. deep, drains SW., asc. 35 ft. over E. slope.
- 22.30 Spur, slopes SW., desc. 65 ft. over W. slope.
- 28.30 Begin ascent over E. slope, asc. 10 ft.
- 31.07 Denver and Rio Grande Western Railroad, bears N. 30° 56' E. and S. 30° 56' W.
- 34.15 Trail road, in wash, bears NE. and SW., asc. 20 ft. over E. slope.
- 40.20 The ¼ sec. cor. of secs. 18 and 19, monumented with a sandstone, 12x8x8 ins., set, mkd., and witnessed as described in the official record.

Dependent Resurvey of a Portion of the Subdivision, T. 20 S., R. 25 E.

CHAINS

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins. in the ground, and in a collar of stone to top, with brass cap mkd.

T20S R25E

$\frac{1}{2}$ $\frac{S18}{S19}$

1963

Bury original stone cor. alongside iron post.

S. $89^{\circ} 35'$ W., beginning new measurement.

Asc. 30 ft. over broken E. slope.

- 12.60 Small spur slopes NW., desc. 10 ft. over SW. slope.
- 15.70 Wash, 20 lks. wide, 2 ft. deep, drains SE., asc. 60 ft. over broken E. slope.
- 22.70 Spur slopes N., desc. 50 ft. over W. slope.
- 24.65 Wash, 30 lks. wide, 2 ft. deep, drains S., asc. 170 ft. over steep, broken E. slope.
- 32.90 Top of knobby hill, desc. 150 ft. over broken W. slope.
- 39.83 The cor. of secs. 13, 18, 19 and 24, on the W. bdy. of the Tp., monumented with a 3 in. iron post, set, mkd. and witnessed as described in the official record of the 1910 survey.
- Land, rolling, broken.
Soil, rocky.
No timber.
Undergrowth, shadscale and sagebrush.

From the cor. of secs. 17, 18, 19 and 20.

N. $0^{\circ} 07'$ W., bet. secs. 17 and 18.

Over rolling desert land through shadscale and dense tumbleweeds. Desc. 15 ft. over NW. slope.

- 3.25 Telephone line, bears NE. and SW.
- 4.20 Levee of abandoned railroad track, bears NE. and SW.
- 12.30 Wash, 10 lks. wide, 3 ft. deep, drains SW., asc. 30 ft. over SW. slope.
- 30.20 Wash, 15 lks. wide, 3 ft. deep; drains SW.
- 38.50 Levee of abandoned railroad track, bearing S. 25° E. and N. 25° W.
- 40.17 Point for the $\frac{1}{4}$ sec. cor. of secs. 17 and 18 at proportionate dist.; there is no remaining evidence of the original cor.

Dependent Resurvey of a Portion of the Subdivision, T. 20 S., R. 25 E.

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground, and in a collar of stone to top, with brass cap mkd.

T20S R25E
½
S18|S17
1963

Asc. 70 ft. over SE. slope.

51.85 Telephone line, bears N. 25° E. and S. 25° W.

54.20 Trail road, bears NE. and SW.

54.95 Denver and Rio Grande Western Railroad, bears N. 25° E. and S. 25° W.

61.85 Point of spur slopes E., desc. 55 ft. over NE. slope.

70.35 Wash, drains E., asc. 15 ft. over SE. slope.

75.00 Point of spur slopes E., desc. 20 ft. over NE. slope.

80.34 The cor. of secs. 7, 8, 17 and 18, monumented with a sandstone, 14x4x4 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 14 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T20S R25E
S7|S8
S18|S17
1963

Bury original stone cor. alongside iron post.

Land, rolling desert.

Soil, sandy clay.

No timber.

Undergrowth, shadscale and tumbleweeds.

From the cor. of secs. 8, 9, 16 and 17.

S. 89° 56' W., bet. secs. 8 and 17.

Over broken, rolling land through scattered juniper timber and sagebrush undergrowth. Desc. 15 ft. over NW. slope.

9.00 Wash, 10 lks. wide, 2 ft. deep, drains NE., asc. 100 ft. over slope.

32.75 Spur slopes NE., desc. 70 ft. over NW. slope.

40.14 The 1/4 sec. cor. of secs. 8 and 17, monumented with a sandstone, 20x10x4 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Dependent Resurvey of a Portion of the Subdivision, T. 20 S., R. 25 E.

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 16 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T20S R25E

¼ $\frac{S8}{S17}$

1963

Bury original stone cor. alongside iron post.

N. 89° 57' W., beginning new measurement.

Desc. 10 ft. over NW. slope.

- 0.55 Wash, 10 lks. wide, 8 ft. deep, drains N., asc. 20 ft. over NE. slope.
- 3.40 Point of small spur slopes N., desc. 30 ft. over NW. slope.
- 29.00 Wash, drains N. 20° E., asc. 15 ft. over gentle NE. slope.
- 29.70 Power line, bears N. 21° 47' E. and S. 21° 47' W.
- 30.50 Denver and Rio Grande Western Railroad, bears N. 21° 47' E. and S. 21° 47' W.
- 40.20 The cor. of secs. 7, 8, 17 and 18.

Land, rolling and broken.
Soil, sandy clay, rocky.
Timber, scattered juniper.
Undergrowth, sagebrush.

S. 89° 48' W., bet. secs. 7 and 18.

Over broken, rolling land through scattered juniper timber with sagebrush and shadscale undergrowth. Asc. 90 ft. over NE. slope.

- 6.00 Ridge, bears N. and S., desc. 40 ft. over NW. slope.
- 9.50 Head of draw, drains N., asc. 65 ft. over NE. slope.
- 14.00 Ridge, bears N., S., and W., desc. 10 ft. along S. slope.
- 26.95 Base of descent, slopes SE., asc. 110 ft. over steep SE. slope.
- 32.90 Rim of mesa, bears NE. and SW., asc. 5 ft. over gentle SE. slope.
- 40.06 The ¼ sec. cor. of secs. 7 and 18, monumented with a sandstone, 18x10x6 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Dependent Resurvey of a Portion of the Subdivision, T. 20 S., R. 25 E.

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins. in the ground, and in a collar of stone to top, with brass cap mkd.

T20S R25E

$\frac{1}{4}$ S7
S18
1963

Bury original stone cor. alongside iron post.

S. $89^{\circ} 26'$ W., beginning new measurement.

Desc. 120 ft. over NW. slope.

29.00 Wash, 15 lks. wide, 1 ft. deep, drains SW., asc. 90 ft. over SE. slope.

38.00 Trail road, bears N. and S.

39.77 The cor. of secs. 7, 12, 13 and 18, on the W. bdy. of the Tp., monumented with a 3 in. iron post, set, mkd. and witnessed as described in the official record.

Land, rolling, broken.

Soil, clay, rocky.

Timber, scattered juniper.

Undergrowth, sagebrush and shadscale.

From the cor. of secs. 7, 8, 17 and 18.

N. $0^{\circ} 03'$ W., bet. secs. 7 and 8.

Over rolling desert land through widely scattered timber with dense shadscale and sagebrush undergrowth. Desc. 10 ft. over gentle NE. slope.

10.05 Wash, 10 lks. wide, 2 ft. deep, drains SE., asc. 45 ft. over S. slope.

14.85 Low ridge, bears E. and W., desc. 45 ft. over N. slope.

24.20 Enter nearly level desert land.

26.70 Wash, 20 lks. wide, 2 ft. deep, drains irregularly E.

40.19 The $\frac{1}{4}$ sec. cor. of secs. 7 and 8, monumented with a sandstone, $16 \times 5 \times 3$ ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 8 ins. in the ground to bedrock, and in a mound of stone, $3\frac{1}{2}$ ft. base to top, with brass cap mkd.

T20S R25E

$\frac{1}{4}$
S7|S8

1963

Bury original stone cor. alongside iron post.

Dependent Resurvey of a Portion of the Subdivision, T. 20 S., R. 25 E.

CHAINS

N. 0° 11' W., beginning new measurement.

3.00 Leave nearly level land, asc. 190 ft. over steep, rocky SW. slope.

13.70 Rim of mesa, bears SE. and W., desc. 160 ft. over N. slope of mesa. Enter dense juniper.

40.16 Point for the cor. of secs. 5, 6, 7 and 8 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground to bedrock, and in a mound of stone, 3½ ft. base to top, with brass cap mkd.

T20S R25E

S6	S5
S7	S8

1963

Land, rolling and mountainous.

Soil, clay, rocky.

Timber, widely scattered juniper S. portion; dense juniper N. portion.

Undergrowth, dense shadscale and sagebrush.

From the cor. of secs. 4, 5, 8 and 9.

N. 89° 58' W., bet. secs. 5 and 8.

Over rolling N. slope of mesa through scattered juniper with shadscale undergrowth.

4.70 Wash, 20 lks. wide, 3 ft. deep, drains N.

15.00 Wash, 20 lks. wide, 10 ft. deep, drains N.

20.00 Wash, 50 lks. wide, 15 ft. deep, drains N.

40.41 The 1/4 sec. cor. of secs. 5 and 8, monumented with a sandstone, 14x8x4 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 3½ ft. base to top, with brass cap mkd.

T20S R25E

S5	S8
----	----

1963

Bury original stone cor. alongside iron post.

S. 89° 48' W., beginning new measurement.

Continue along N. slope of mesa.

Dependent Resurvey of a Portion of the Subdivision, T. 20 S., R. 25 E.

CHAINS

- 13.75 Point of spur slopes N.
 25.50 Bottom of draw, 50 ft. deep, drains N.
 33.50 Point of spur slopes N., descend 40 ft. along N. slope.
 40.11 The cor. of secs. 5, 6, 7 and 8.

Land, rolling N. slope of mesa.
 Soil, rocky clay.
 Timber, scattered juniper.
 Undergrowth, shadscale.

S. 89° 53' W., bet. secs. 6 and 7.

Along gentle N. slope of mesa through widely scattered juniper timber with dense shadscale. Desc. 40 ft. along N. slope.

- 2.00 Wash, 50 lks. wide, 10 ft. deep, drains N.
 16.90 Road, unimproved, bears NE. and SW.
 19.50 Wash, drains N., asc. 20 ft. along N. slope.
 20.30 Trail road, bears N. and S.
 40.10 The 1/4 sec. cor. of secs. 6 and 7, monumented with a sandstone, 9x5x3 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone to top, with brass cap mkd.

T20S R25E

¼ $\frac{S6}{S7}$

1963

Bury original stone cor. alongside iron post.

S. 89° 51' W., beginning new measurement.

Asc. 60 ft. along N. slope.

- 15.00 Road, unimproved, bears irregularly E. and NW.
 23.50 Road, unimproved, bears N. and S., des. 30 ft. along N. slope.
 39.57 The cor. of secs. 1, 6, 7 and 12, monumented with a sandstone, 10x8x4 ins., set, mkd. and witnessed as described in the official record. This cor. will now function as the cor. of secs. 6 and 7, T. 20 S., R. 25 E. only.

Dependent Resurvey of a Portion of the Subdivision, T. 20 S., R. 25 E.

CHAINS

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T20S
R 24E R25E

S1 | S6
 | S7

1963

Bury original stone cor. alongside iron post.

No accessories available.

From the above cor., the cor. of secs. 1 and 12, T. 20 S., R. 24 E., bears South, 0.75 chs. dist., monumented with a 3 in. iron post, set, mkd. and witnessed as described in the official record of the 1910 resurvey.

land, gently rolling.

Soil, clay.

Timber, widely scattered juniper.

Undergrowth, dense shadscale.

From the cor. of secs. 5, 6, 7 and 8.

N. $0^{\circ} 13'$ E., bet. secs. 5 and 6.

Over rolling desert land through dense shadscale undergrowth; desc. 95 ft. over N. slope.

17.40 Road, unimproved, bears irregularly E. and W.

20.05 Wash, 10 lks. wide, 3 ft. deep, drains NE.; asc. 90 ft. over S. slope.

32.60 Spur slopes E. about 6.00 chs.; thence NE., desc. 40 ft. over N. slope.

40.16 Point for the $\frac{1}{4}$ sec. cor. of secs. 5 and 6 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 22 ins. in the ground, and in a collar of stone to top, with brass cap mkd.

T20S R25E

$\frac{1}{2}$
S6 | S5

1963

Desc. 55 ft. over gentle N. slope.

48.85 Wash, 10 lks. wide, 2 ft. deep, drains NE.

78.95 Wash, 15 lks. wide, 6 ft. deep, drains NE.

Dependent Resurvey of a Portion of the Subdivision, T. 20 S., R. 25 E.

CHAINS

82.06

The cor. of secs. 5, 6, 31 and 32, on the N. bdy. of the Tp., monumented with a 2½ in. iron post, set, mkd. and witnessed as described in the 1963 field notes of the S. bdy. of T. 19 W., R. 25 E.

Land, gently rolling desert.
Soil, clay.
No timber.
Undergrowth, dense shadscale.

Present River Meander Through a Portion of T. 20 S., R. 25 E.

Note: Since 1894, the date of the original survey of a portion of this township, the Colorado River has made major shifts in its position in the NE. portion of T. 20 S., R. 25 E. However, in each case, the shift has been by erosive and accretive action rather than by evulsion so that ownership of adjoining lands have shifted with the river moves. However, the original 1894 meander line of the right bank of the Colorado River through secs. 1, 11, 12 13, 14 and 15 has no influence in the placement of present boundary limits of federally owned lands on either side of the river. A traverse of the right bank is made for information purposes only.

Traverse of the Present Right Bank, Colorado River; Section 1

From a point S. 0° 05' E., 24.50 chs. dist. from the cor. of Tps. 19 and 20 S., Rs. 25 and 26 E., on the present right bank of the Colorado River between secs. 1 and 6.

Thence with a traverse along the present right bank of the Colorado River downstream through section 1, for information purposes only.

S. 56° 00' W. 14.00 chs.

S. 69° 50' W., 16.15 chs.

S. 64° 04' W., 13.98 chs.

S. 38° 41' W., 16.11 chs.

S. 28° 28' W., 24.30 chs.

S. 47° 32' E., 3.27 chs.

S. 24° 53' E., 2.90 chs.

Intersect the section line between secs. 1 and 12 at a pt. 22.80 chs, East of the cor. of secs. 1, 2, 11 and 12. Point for the M.C. of secs. 1 and 12. Not monumented.

Dependent Resurvey of a Portion of the Subdivision, T. 20 S., R. 25 E.

CHAINS

Thence with a traverse along the present right bank of the Colorado River, downstream, through section 12, for information purposes only.

S. 24° 53' E., 14.27 chs.

S. 24° 37' E., 9.10 chs.

S. 12° 03' W., 16.14 chs.

S. 37° 18' W., 22.35 chs.

S. 49° 06' W., 11.71 chs.

S. 39° 28' W., 10.50 chs.

Intersect the section line between sections 11 and 12, at a point S. 0° 19' W., 30.50 chs. dist. from the meander cor. and 1/4 sec. cor. of secs. 11 and 12, hereinbefore described. Pt. for the M.C. of secs. 11 and 12. Not monumented.

Thence with a traverse along the present right bank of the Colorado River, downstream, through section 11, for information purposes only.

S. 39° 28' W., 2.10 chs.

S. 41° 12' W., 2.67 chs.

S. 73° 01' W., 7.70 chs.

S. 51° 18' W., 3.28 chs.

S. 29° 48' W., 1.77 chs.

To witness meander cor. of secs. 11 and 14 set at 66.00 chs. on line between said sec.

Thence with a traverse along the present right bank of the Colorado River, downstream through section 14, for information purposes only.

S. 10° 02' W., 3.13 chs.

S. 26° 55' W., 11.82 chs.

S. 21° 06' W., 7.87 chs.

S. 12° 40' W., 1.43 chs.

S. 17° 36' E., 11.09 chs.

S. 29° 52' E., 13.89 chs.

S. 21° 50' E., 2.26 chs.

Dependent Resurvey of a Portion of the Subdivision, T. 20 S., R. 25 E.

CHAINS

S. 14° 12' E., 2.47 chs.

S. 15° 30' W., 3.78 chs.

S. 34° 23' W., 15.12 chs.

S. 52° 41' W., 8.53 chs.

S. 69° 30' W., 8.15 chs.

N. 42° 32' W., 9.88 chs.

N. 64° 12' W., 15.39 chs.

N. 68° 13' W., 6.20 chs.

N. 86° 35' W., 18.62 chs.

To true point for meander cor. of secs. 14 and 15, set at 16.40 chs. on S. half of line between said secs. which is witnessed N. 0° 02' W., 1.56 chs. dist.

Thence with a traverse along the present right bank of the Colorado River downstream through section 15, for information purposes only.

S. 59° 43' W., 10.43 chs.

S. 5° 34' E., 12.69 chs.

S. 31° 33' E., 6.90 chs.

To meander cor. of secs. 15 and 22, and witness cor. of secs. 14 and 15 only, set at 35.93 chs. on E. half of line between secs. 15 and 22 on the present right bank of the Colorado River.

Note: The present meander line of the right bank of the Colorado River through secs. 22, 27, 26, 35, 34 and 33 follows very closely along the position of the meander line of 1910 and is not remeandered at the present time.

Present Traverse Along the Left Bank of the Colorado River Through Section 1, for Information Purposes Only.

From the witness original meander cor. of secs. 1 and 6, on the E. bdy. of the township, shown at 37.70 chs. southing in present field notes of the resurvey of a portion of the E. bdy. of T. 20 S., R. 25 E.

Thence with a traverse of the present left bank of the Colorado River downstream through section 1.

CHAINS

S. 78° 56' W., 14.71 chs. At 6.42 chs. on this course intersect calculated position of adjusted original (1894) meander line, bears North 6.64 chs. and South 3.36 chs. Thence continue with a traverse along the left bank of the river.

S. 72° 42' W., 5.65 chs.

S. 67° 22' W., 3.64 chs.

S. 64° 42' W., 14.14 chs.

S. 39° 34' W., 6.17 chs.

S. 28° 18' W., 19.81 chs.

S. 6° 19' W., 8.18 chs.

S. 26° 51' E., 2.89 chs. Intersect the section line between secs. 1 and 12 at a point West 8.90 chs. dist. from the $\frac{1}{2}$ sec. cor. of secs. 1 and 12, hereinbefore described. Point for the M.C. of secs. 1 and 12. Not monumented.

Thence with a traverse along the present left bank of the Colorado River through section 12, for information purposes only.

S. 26° 51' E., 10.52 chs.

S. 21° 30' E., 10.44 chs. At 8.38 chs. on this course, proportionate point for auxiliary meander cor. of sec. 12, marking NW. terminal of dividing line between private accretion lands attaching to original lots 1 and 5, sec. 12, and federally owned accretion lands attaching to original lots 6 and 7, sec. 12. Set an iron post, 30 ins. long, 2½ ins. diam., 26 ins. in the ground with brass cap mkd. T20S R25E

AMC

S12

1966

From this cor., the true pt. for the special meander cor. on the E-W center line of sec. 12, bears S. 44° 07' E. 41.75 chs. dist., hereinafter described. Thence with the meanders of the present left bank of the river.

CHAINS

S. 7° 51' W., 10.31 chs.

S. 20° 00' W., 17.88 chs. At 3.93 chs. on this course, proportionate pt. for auxiliary meander cor. sec. 12, marking the NW. terminal of dividing line between accretion lands attaching to federally owned original lots 6 and 7, sec. 12, and accretion lands attaching to State owned original lot 8, sec. 12. Set an iron post, 30 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.

T20S R25E

AMC

S12

1966

From this cor., the point for special meander cor. on the E-W center line of sec. 12, and on the adjusted original (1894) meander line of sec. 12, bears S. 21° 32' E., 7.03 chs. dist., hereinafter described. Thence continue with the traverse of the left bank for information purposes; along the river limiting boundary of accretion lands attaching to privately owned lot 8, sec. 12. At 8.22 chs. the adjusted orig. (1894) meander line of sec. 12, bears N. 40° 56' W., 2.28 chs. and S. 40° 56' E., 2.21 chs.

S. 60° 50' W., 3.38 chs.

S. 32° 20' W., 2.81 chs.

S. 24° 00' W., 3.69 chs.

S. 29° 00' W., 5.75 chs.

S. 23° 50' W., 14.51 chs.

S. 10° 44' E., 8.55 chs. To witness meander cor. of secs. 12 and 13, set at 21.12 chs. on W. half of line between said secs. on the present left bank at the W.M.C. of secs. 12 and 13.

Thence with the traverse of the present left bank of the Colorado River through sec. 13, for information purposes only.

CHAINS

S. 10° 44' E., 13.99 chs.

S. 15° 30' E., 8.53 chs.

S. 26° 06' W., 6.86 chs.

S. 27° 50' W., 8.04 chs.

S. 36° 50' W., 6.09 chs.

At 2.98 chs. on this course intersect an angle point on the adjusted original (1894) meander line, bears N. 8° 24' E., 31.59 chs. and S. 62° 56' W., 9.74 chs.

S. 73° 30' W., 6.82 chs.

Thence with the meanders of the left bank.

S. 62° 30' W., 2.68 chs.

S. 42° 50' W., 5.76 chs.

S. 39° 16' W., 1.60 chs.

To witness meander cor. of sec. 14, set at 31.54 chs. on line between secs. 13 and 14. This cor. also functions as the M.C. of sec. 13.

Thence with the traverse of the present left bank of the Colorado River through sec. 14.

S. 43° 50' W.; 10.14 chs.

S. 32° 30' W., 10.79 chs.

S. 21° 50' W., 8.07 chs.

S. 29° 15' W., 8.42 chs.

Intersect section line between secs. 14 and 23 at a point N. 89° 10' W., 19.98 chs. dist. from the cor. of secs. 13, 14, 23 and 24, at the M.C. of sec. 23, hereinbefore described.

Thence with a traverse along the present left bank of the Colorado River through sec. 23, for information purposes only.

S. 29° 15' W., 2.26 chs.

N. 85° 54' W., 23.15 chs.

To meander cor. of secs. 14 and 23, hereinbefore described.

Thence with the meander along the present left bank of the Colorado River through sec. 14.

Dependent Resurvey of a Portion of the Subdivision, T. 20 S., R. 25 E.

CHAINS

N. 60° 30' W., 5.30 chs.

N. 24° 30' W., 4.35 chs.

N. 42° 00' W., 2.33 chs.

N. 35° 30' W., 3.01 chs.

N. 47° 00' W., 6.98 chs.

S. 75° 00' W., 5.94 chs.

S. 39° 30' W., 10.52 chs.

S. 30° 00' W., 6.92 chs.

Intersect the meander cor. of secs. 14 and 23 at a point N. 89° 56' E., 5.02 chs. dist. from the calculated point for the closing cor. of secs. 22 and 23, which point falls in Colorado River.

Thence with the meanders of the present left bank of the Colorado River through sec. 23.

S. 30° 00' W., 5.65 chs.

S. 15° 30' W., 8.02 chs.

To meander cor. of secs. 22 and 23, shown at 28.08 chs. on N. half mile between said secs.

Thence with the meanders of the present left bank of the Colorado River through sec. 22.

S. 59° 33' W., 1.74 chs.

S. 45° 17' W., 12.21 chs.

S. 25° 11' W., 30.83 chs.

S. 23° 20' W., 7.26 chs.

S. 5° 30' E., 17.02 chs.

S. 7° 50' W., 7.00 chs.

To meander cor. of secs. 22 and 27, shown at 25.58 chs., in the field notes of the present retracement of the line between secs. 22 and 27.

Note: The present meander line of the left bank of the Colorado River through secs. 26, 27, 35 and 34 follows very closely along the position of the meander line of 1910 and is not in need of remeandering at the present time.

CHAINS

Adjusted Original River Meanders Through a
Portion of T. 20 S., R. 25 E.

Adjusted Original Meanders (1894) of the Left Bank of the
Colorado River through Sec. 1.

From the unmonumented point for the meander cor. of secs.
1 and 6, on the E. bdy. of the township, shown at 25.77
chs. in the present field notes of the resurvey of said
line, which point falls in Colorado River: thence by
calculation, with adjusted original meanders through
sec. 1, across the waters of the Colorado River.

S. 38° 20' W., 4.64 chs.

S. 51° 00' W., 4.40 chs.

South 10.00 chs.

At 6.64 chs. on this course,
the present left shore line
of the Colorado River bears
N. 78° 56' E. and S. 78° 56'
W. Thence along E. margin of
accretion lands attaching to
privately owned original lots
6, 7 and 10, sec. 1.

S. 48° 00' W., 2.40 chs.

South 4.00 chs.

S. 13° 00' E., 4.50 chs.

S. 8° 30' W., 12.00 chs.

S. 16° 00' E., 9.60 chs.

S. 11° 00' E., 9.00 chs.

To meander cor. of secs. 1
and 12, at a point N. 89° 38'
W., 4.68 chs. from the cor.
of secs. 1, 6, 7 and 12, on
the E. bdy. of the township,
hereinbefore described.

Thence with adjusted original (1894) meanders of the left
bank of the Colorado River through sec. 12.

S. 11° 51' E., 14.94 chs.

S. 0° 05' E., 7.52 chs.

S. 21° 52' W., 6.01 chs.

S. 40° 15' W., 3.50 chs.

S. 31° 40' W., 1.81 chs.

Dependent Resurvey of a Portion of the Subdivision, T. 20 S., R. 25 E.


CHAINS

S. 38° 40' W., 3.20 chs.

S. 43° 50' W., 8.01 chs.

At 7.92 chs. on this course intersect point for special meander cor. of sec. 12, on E-W center line of sec. 12, which falls in an old channel of the river and deemed unsafe to perpetuate. Point selected for the witness special meander cor., bears N. 89° 30' E., 0.87 chs. dist. Set an iron post, 30 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.

T20S R25E
SMC



1966

From true point for cor., the dividing partition line between private and federally owned accretion lands bears N. 44° 07' W., 41.75 chs. dist. to present meander line of the Colorado River. Thence along S. margin of accretion land attaching to federally owned original lots 6 and 7, sec. 12.

S. 61° 34' W., 3.99 chs.

N. 70° 10' W., 6.48 chs.

S. 78° 46' W., 5.70 chs.


N. 85° 15' W., 4.84 chs.

N. 87° 44' W., 5.29 chs.

N. 74° 10' W., 3.48 chs.

At 0.31 chs. on this course intersect point for special meander cor. on E-W center line of sec. 12. Set an iron post, 30 ins. long, 2½ ins. diam., 28 ins. in the ground, with brass cap mkd.

T20S R25E



1966

From this cor., the dividing

Dependent Resurvey of a Portion of the Subdivision, T. 20 S., R. 25 E.

CHAINS

partition line between federally and State owned accretion lands bears N. 21° 32' W., 7.03 chs. dist. to present meander line of Colorado River. Thence along S. margin of accretion land attaching to State owned original lot 8, sec. 12.

N. 40° 56' W., 4.49 chs.

At 2.21 chs. on this course, present meander line of the left bank of the Colorado River bears N. 20° 00' E. and S. 20° 00' W. Thence continue with adjusted original (1894) meander line across Colorado River by calculation.

N. 57° 31' W., 3.69 chs.

N. 72° 03' W., 2.99 chs.

S. 83° 52' W., 4.59 chs.

S. 68° 49' W., 12.50 chs.

S. 34° 52' W., 8.12 chs.

S. 12° 07' W., 6.72 chs.

S. 6° 59' W., 2.71 chs.

S. 8° 54' E., 2.71 chs.

S. 12° 34' E., 4.83 chs.

S. 19° 03' E., 7.63 chs.

S. 62° 55' E., 3.01 chs.

S. 39° 22' E., 4.31 chs.

S. 12° 49' E., 4.01 chs.

S. 10° 01' W., 2.01 chs.

S. 21° 00' E., 1.36 chs.

To point for original meander cor. of secs. 12 and 13, at 24.42 chs. on W. half of line between said secs., which pt. falls in Colorado River.

Thence with calculated adjusted original (1894) meanders of the left bank of the Colorado River through sec. 13.

S. 33° 36' E., 7.66 chs.

CHAINS

S. 8° 24' W., 31.59 chs. Intersect present meander line of left bank of Colorado River, bears N. 36° 50' E., and S. 36° 50' W.

S. 62° 56' W., 9.74 chs.

S. 69° 20' W., 7.71 chs. To true point for original meander cor. of secs. 13 and 14 shown at 35.70 chs. on line between said secs.

Thence with original (1894) meanders of left bank of Colorado River through sec. 14 (suitable closure eliminates need of adjustments) across the waters of the Colorado River.

S. 66° 30' W., 5.24 chs.

S. 61° 00' W., 4.70 chs.

S. 66° 00' W., 4.00 chs.

S. 80° 45' W., 10.60 chs.

S. 52° 00' W., 7.60 chs.

S. 42° 45' W., 15.00 chs.

S. 21° 30' W., 13.00 chs. To meander cor. of secs. 14 and 23, hereinbefore described.

The original (1910) meander line of the left bank of the Colorado River through sec. 23, follows along southern limits of accretion lands attaching to federally owned original lots 1 and 2, sec. 23, and its courses and distances through sec. 23 are no longer of consequence as the original acres of lots 1 and 2 are now being combined with the accretion lands to form new lots 7 and 8, sec. 23.

General Description

Township 20 South, Range 25 East is located about seven miles northeast of Cisco, Utah and consists mostly of rolling desert plateau in the north and west portions. The Colorado River enters the township in the northeast corner and flows southwesterly through the township. The land along the river through secs. 1, 11, 12, 13, 14 and 15 is good farm land while the rest of the land along the river is mountainous and broken with high sandstone ledges. The drainage is generally southeast

Dependent Resurvey of a Portion of the Subdivision, T. 20 S., R. 25 E.

CHAINS

into the Colorado River. The soil is sandy to sandy clay, and rocky in the mountainous portion of the township. The timber consists mostly of scrub juniper, with some pinon, with sagebrush, greasewood, grass and shadscale undergrowth. There is no water in the township except the Colorado River. The Denver and Rio Grande Western Railroad bears northeast and southwest through the northwest portion of the township. U. S. Highway 50 and 6 bears northeast and southwest through the extreme northwest corner of the township. The elevation of the township varies from 4,200 ft. along the river to 5,600 ft. above sea level in the southeast portion. The township is good winter range for sheep.

The action of erosion and accretion are quite pronounced along the Colorado River especially in the NE $\frac{1}{4}$ of the township. There is a number of rather extensive silt, sand and gravel bars building up in wide places in the Colorado River. These bars are generally unstable in character but are submerged only at fairly high water stages of the river. In some places they are being invaded by willows and cottonwoods. It is likely that within a few years some of these bars will be washed away and some will increase in elevation by fill-in sediment and debris and eventually attain the dignity of true islands. Others will likely build up in height, but attach themselves to and become an integral part of one or the other banks of the river.

Blank

Page

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS

NAMES	CAPACITY
Ferrel D. Reynolds	Surveying Technician
Paul E. Mahler	Surveying Aid
Ashley D. Allen	Surveying Aid
Phylip John Leslie	Surveying Aid
Ray S. Muniz	Surveying Aid
Steven M. Christensen	Surveying Aid
Max B. Morrill	Surveying Aid
Robert L. Gleave	Surveying Aid
Merlin J. Robinson	Surveying Aid

I, Glen B. Hatch

, HEREBY CERTIFY upon honor that,

in pursuance of special instructions bearing date of the 21 day of September , 19 62, and supplemental special instructions dated August 24, 1966

I have retraced a portion of the South Boundary (Fourth Standard Parallel South) and a portion of the subdivisional lines, and dependently resurveyed a portion of the East Boundary, a portion of the West Boundary, a portion of the subdivisional lines and meanders of the Colorado River in Township 20 South, Range 25 East

of the Salt Lake Meridian, in the State of Utah , which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

December 20, 1966
(Date)

Glen B. Hatch
(Cadastral Surveyor)
SUPERVISORY

(Date)

(Cadastral Surveyor)

APPROVED FOR APPROVAL
OCT 27 1965 JUN 25 1969

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT,
Washington, D. C.

The foregoing field notes of the retracement of a portion of the South Boundary (Fourth Standard Parallel South) and a portion of the subdivisional lines, and the dependent resurvey of a portion of the East Boundary, a portion of the West Boundary, and a portion of the subdivisional lines and meanders of the Colorado River in Township 20 South, Range 25 East, Salt Lake Meridian, Utah

executed by Glen B. Hatch, Supervisory Cadastral Surveyor having been critically examined and found correct, are hereby approved.

JUL 11 1968
(Date)

R. E. Brown
(Chief, Division of Engineering)

CERTIFICATE OF TRANSCRIPT

~~I CERTIFY That the foregoing transcript of the field notes of the above-described surveys in _____, is a true copy of the original field notes.~~

~~(Date)~~

~~(Chief, Division of Engineering)~~

Blank

Page

Blank

Page

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

ORIGINAL

FIELD NOTES

OF THE

DEPENDENT RESURVEY

OF

A PORTION OF THE SUBDIVISIONAL LINES

AND

THE SURVEY OF

THE SUBDIVISION OF SECTION 29

OF

TOWNSHIP 39 SOUTH, RANGE 16 WEST

Of the SALT LAKE Meridian,

In the State of UTAH

EXECUTED BY

GLEN B. HATCH

SUPERVISORY CADASTRAL SURVEYOR

Under special instructions dated SEPTEMBER 3, 19 65, which provided for the surveys
included under Group Number 486, approved SEPTEMBER 13, 1965,
and assignment instructions dated FEBRUARY 23, 19 66.

Survey commenced MARCH 2, 19 66


Survey completed MARCH 16, 19 66

1968 SEP 24 AM 10 00 .0

SECTION 17
TOWNSHIP 39 S
RANGE 16 W
LAKE COUNTY, UTAH

INDEX DIAGRAM

Township 39 SOUTH, Range 16 WEST,

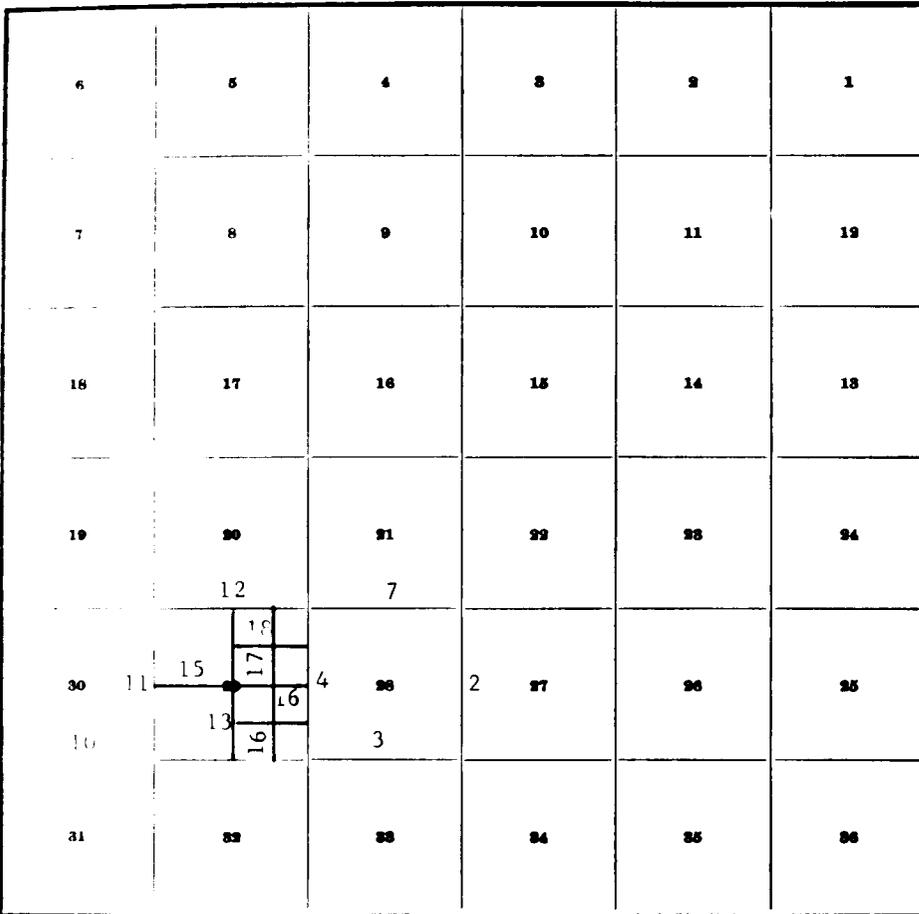

Dependent Resurvey of a Portion of the Subdivision, T. 39 S., R. 16 W.

CHAINS

The South boundary, the north 2 miles of the East boundary, (Pine Valley Guide Meridian), and the south 2 miles of the West boundary were surveyed by T. C. Bailey in 1877. T. C. Bailey and Burrill surveyed a portion of the subdivisional lines in 1877. In 1918, Hugo Price and Elliot Bird resurveyed the east 2 miles of the South boundary, a portion of the West boundary, retraced a portion of the East boundary, retraced or resurveyed a portion of the subdivisional lines and completed the survey of the subdivisional lines. The following field notes are those of the dependent resurvey of a portion of the subdivisional lines and the survey of the subdivision of section 29, Township 39 South, Range 16 West.

The purpose of this survey is to clear up the matter of suspected occupancy trespass on Federal lands within the area based on a request for survey by the local district manager of the Bureau of Land Management, dated August 4, 1965.

The survey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions 1947, and Special Instructions dated September 3, 1965.

The direction of the lines of this survey were determined by reference to true meridians established on line by altitude observations on the sun. The lines were carried forward by sustained angulation being supplemented by other altitude observations on the sun taken throughout the progress of the survey.

The geographic position of the southeast corner of section 28 is at Latitude $37^{\circ} 21' 33.640''$ North and Longitude $113^{\circ} 38' 31.358''$ West as computed from section line ties to U.S.G.S. triangulation station "Veyo," at Latitude $37^{\circ} 21' 57.437''$ North, and Longitude $113^{\circ} 40' 23.044''$ West, located S. $71^{\circ} 50' 47''$ W., 16.68 chs. distance from the center of $\frac{1}{4}$ section corner of section 29.

The magnetic declination was found to be $16^{\circ} 30'$ East.

Dependent Resurvey of a Portion of the
Subdivision, T. 39 S., R. 16 W.

Reestablishment of the Survey Executed
by Bailey and Burrill in 1877

Beginning at the reestablished point for the cor. of
secs. 27, 28, 33 and 34 at proportionate dist.; there
is no remaining evidence of the original cor.

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 3 ins. in the ground to bedrock, and in a mound of stone, 6 ft. base to top, with brass cap mkd.

T39S R16W

S28	S27
S33	S34

1966

From this cor., the cor. of secs. 3, 4, 33 and 34, on the S. bdy. of the Tp., bears S. 0° 13' W., 79.20 chs. dist., monumented with a lava rock, 10x12x18 ins., firmly set and plainly mkd. 3 notches on the E. and W. edges, with small mound of stone to W. This control line was fully retraced and careful search was made for evidence of intervening corner, which was not recovered.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T39S R16W

S33	S34
S4	S3

T40S
1966

Bury original stone cor. alongside iron post.

From the same cor., the cor. of secs. 26, 27, 34 and 35, monumented with an iron post, 2 ins. diam., set, mkd. and witnessed as described in the 1918 official record, bears N. 89° 51' E., 80.66 chs. dist. This control line was fully retraced and careful search was made for evidence of intervening corner, which was not recovered.

From the same cor., the cor. of secs. 21, 22, 27 and 28, bears N. 0° 22' E., 79.20 chs. dist., hereinafter described.

From the same cor., the cor. of secs. 28, 29, 32 and 33, bears N. 88° 45' W., 81.02 chs. dist., hereinafter described.

Thence,

N. 0° 22' E., bet. secs. 27 and 28.

Over mountainous land through medium dense timber. Asc. 280 ft. over broken and rocky SE slope.

10.80 Top of ledge, 25 ft. high, bears nearly E. and W., asc. 140 ft. over gentle SE slope. Timber becomes scattered.

27.00 Ridge, bears NE. and SW.; desc. 35 ft. over gentle NW slope.

Dependent Resurvey of a Portion of the Subdivision, T. 39 S., R. 16 W.

CHAINS

36.60 Top of ledge, 15 ft. high, bears N. 35° E. and S. 35° W., desc. 80 ft. over rocky NW' slope.

39.60 Point for the 1/4 sec. cor. of secs. 27 and 28 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 5 ft. base to top, with brass cap mkd.

T39S R16W

½
S28 | S27
1966

Desc. 495 ft. over steep and rocky NW. slope.

76.60 Santa Clara River, 10 lks. wide, 1 ft. deep, flows W. from N., asc. 5 ft. over S. slope.

79.20 The cor. of secs. 21, 22, 27 and 28, monumented with a lava boulder, 3x3x3 ft. above ground, plainly mkd. 3 notches on E. and 2 on S. edges. Not practical to monument this point with an iron post.
At a point 2 lks. east of true cor. point.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T39S R16W

W S21 | S22
C S28 | S27

1966

Raise a mound of stone, 5 ft. base, 3 ft. high, W. of cor.

Land, mountainous.

Soil, rocky.

Timber, scattered to medium dense pinon and juniper.

Undergrowth, black brush, sagebrush and scattered oak brush.

From the cor. of secs. 27, 28, 33 and 34.

N. 88° 45' W., bet. secs. 28 and 33.

Over mountainous land through medium dense timber. Asc. 35 ft. along SE. slope.

14.75 Top of ascent, slopes S., desc. 325 ft. over rocky SW. slope.

21.60 Old fence, bears about N. 60° W. and S. 60° E.

40.51

Point for the 1/4 sec. cor. of secs. 28 and 33 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T39S R16W

1/2 S28
S33

1966

Desc. 95 ft. over SW. slope.

50.00

Slope changes, desc. 75 ft. over NW. slope.

55.87

Fence, bears about N. 45° E. and S. 45° W.

56.92

Telephone line, bears about N. 12° E. and S. 12° W.

63.82

Fence, bears about N. 5° W. and S. 5° E.

67.40

Santa Clara River, 10 lks. wide, 1 ft. deep, flows S. 50° E. about 1.00 chs., thence S., asc. 105 ft. over rocky SE. slope.

81.02

The cor. of secs. 28, 29, 32 and 33, monumented with a lava boulder, 7x5x3 ft. above ground, plainly mkd. 4 notches on E. and 1 on S. edges. Not practical to monument this point with an iron post.

Land, mountainous.

Soil, rocky.

Timber, pinon and juniper.

Undergrowth, black brush and sagebrush.

N. 0° 20' E., bet. secs. 28 and 29.

Over mountainous land through scattered timber. Asc. 110 ft. over ledgy and rocky SE. slope.

0.03

Point selected for the witness cor. of secs. 28, 29, 32 and 33.

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 15 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T39S R16W

S29/S28
S32/S33

W C

1966

Dependent Resurvey of a Portion of the Subdivision, T. 39 S., R. 16 W.

CHAINS

- 2.50 Top of ledge, 20 ft. high, bears N. 15° E. and curves W.; asc. 30 ft. over gentle SE. slope.
- 7.20 Top of ascent; bears NE. and SW., thence over gently rolling benchland.
- 19.60 Fence, bears N. 85° W. and S. 70° E.
- 19.74 Point for the S. 1/16 sec. cor. of secs. 28 and 29.
Set an iron post; 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T39S R16W
 S 1/16
 S29 | S28
 1966
- Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.
- Continue over gently rolling benchland. Leave timber.
- 24.05 Transmission line, bears N. 21° 15' E. and S. 21° 15' W., with trail road alongside.
- 30.80 Enter cleared land, bears nearly E. and W.
- 33.10 Trail road, bears nearly E. and W.
- 38.10 Leave cleared land, bears nearly E. and W., enter sagebrush.
- 39.48 The 1/4 sec. cor. of secs. 28 and 29, monumented with a lava rock, 18x12x6 ins., firmly set and plainly mkd. 1/4 on W. face, with small mound of stone to W.
At the cor. point
Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T39S R16W
 ½
 S29 | S28
 1966
- Bury original stone cor. alongside iron post.
- Raise a mound of stone, 3 ft. base, 2 ft. high W. of cor.
- From this cor., the SW. cor. of barn, bears N. 34° 04' E., 12.20 chs. dist., and the SW. cor. of farm house, bears N. 16° 40' E., 18.00 chs. dist.

Dependent Resurvey of a Portion of the Subdivision, T. 39 S., R. 16 W.

CHAINS

N. 0° 36' E., beginning new measurement.

Continue over nearly level land through sagebrush.

- 5.60 Trail road, bears E. curving SE. and W. curving SW.
- 8.70 Fence, bears N. 63° 30' E. and S. 63° 30' W. Enter cultivated land.
- 14.44 Fence, bears N. 42° 30' E. and S. 42° 30' W.
- 18.00 Fence, bears N. 57° E. and S. 57° W. Enter small fruit orchard.
- 18.70 Irrigation canal, 15 lks. wide, 2 ft. deep, flows S. 57° W. from E. Leave orchard.
- 19.68 Point for the N. 1/16 sec. cor. of secs. 28 and 29.
- Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T39S R16W

N 1/16

S29 | S28

1966

Raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

- 20.33 Fence, bears N. 50° 50' E. and S. 50° 50' W., at 30 lks. along fence to SW., a fence bears N. 65° 10' W. Leave cultivated land.
- 20.55 Earth fill dam, bears N. 65° W., 5.00 chs., and S. 65° E., 7.00 chs. Enter small reservoir, dry at this time.
- 24.75 Fence, bears N. 79° E. and S. 79° W., also, N. edge of reservoir.
- 27.40 Centerline of State Highway No. 18, bears N. 54° 23' E. and S. 54° 23' W., asc. 315 ft. over steep and rocky SE. slope. Enter scattered timber.
- 39.36 The cor. of secs. 20, 21, 28 and 29, monumented with a lava rock, 13x8x5 ins., firmly set and plainly mkd. 4 notches on E. and 2 on S. edges, with small mound of stone to W.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 15 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T39S R16W

S20 | S21
S29 | S28

1966

Bury original stone cor. alongside iron post.

Dependent Resurvey of a Portion of the Subdivision, T. 39 S., R. 16 W.

CHAINS

Land, mountainous and rolling bench.
Soil, rocky in mountainous portion, sandy on bench.
Timber, pinon and juniper.
Undergrowth, sagebrush and black brush.

From the cor. of secs. 21, 22, 27 and 28.

N. 88° 32' W., bet. secs. 21 and 28.

Along Santa Clara River bottom through dense willows and sagebrush.

- 4.70 Santa Clara River, 10 lks. wide, 1 ft. deep, flows N. 70° W.
- 7.06 Fence, bears S. 60 lks. to end, and N. 1.20 chs., thence N. 65° E.
- 10.66 Fence, bears N. 50° E 2.00 chs. to end, and S. 50° W.
- 12.75 Santa Clara River, 10 lks. wide, 1 ft. deep, flows S. 35° W., asc. abruptly 60 ft. over ledgy SE. slope.
- 17.15 Top of ledge, 60 ft. high, bears nearly S. and N., asc. 15 ft. over gentle SE. slope. Enter scattered timber.
- 20.45 Top of ascent, slopes S., desc. 30 ft. along broken S. slope.
- 31.65 Rocky draw, drains S., asc. 55 ft. over broken SE. slope.
- 36.30 Rim of draw, bears NE. and curves S., desc. 10 ft. over gentle SW. slope.
- 37.36 Telephone line, bears N. 10° E. and S. 10° W.
- 38.30 Small draw, drains S. 30° E., asc. 65 ft. over E. slope.
- 41.66 The 1/4 sec. cor. of secs. 21 and 28, monumented with a mound of stone, with old and new lath alongside. This is apparently used by local surveyors as being the cor. point; and I accept it as being the best available evidence of the original cor. point.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground to bedrock, and in a mound of stone, 6 ft. base to top, with brass cap mkd.

T39S R16W

¼ $\frac{S21}{S28}$

1966

N. 89° 29' W., beginning new measurement.

Dependent Resurvey of a Portion of the Subdivision, T. 39 S., R. 16 W.

CHAINS

- Asc. 75 ft. over gentle E. slope.
- 0.85 Irrigation canal, 10 lks. wide, 3 ft. deep, flows S. 40° E., about 4.00 chs., thence S.
- 10.45 Top of ascent, bears N. and S., desc. 20 ft. over gently rolling benchland.
- 14.70 Old broken fence line, bears N. 35° E. and S. 35° W.
- 18.65 Spring branch, 3 lks. wide, 2 ins. deep, flows S.
- 19.96 Transmission line, bears N. 21° 15' E. and S. 21° 15' W.
- 23.56 Centerline of State Highway No. 18, bears N. 48° 50' E. and S. 48° 50' W.
- 25.00 Base of hill, bears NE. and SW., asc. 200 ft. over rocky SE. slope.
- 39.46 The cor. of secs. 20, 21, 28 and 29.
- Land, river bottom E. portion, rolling bench and mountainous W. portion.
Soil, rocky sand.
Timber, scattered pinon and juniper.
Undergrowth, sagebrush, black brush, with willows along river.
- From the cor. of secs. 28, 29, 32 and 33.
- N. 89° 55' W., bet. secs. 29 and 32.
- Over rolling bench land through scattered timber. Desc. 25 ft. along slope.
- 1.50 Small rocky draw, drains SE., asc. 130 ft. over ledgy and broken E. slope.
- 3.90 Top of ledge, and rim, bears N. about 2.00 chs. curving E. and S. about 3.00 chs., curving W., thence over gently rolling bench land.
- 8.88 Transmission line, bears N. 21° E. and S. 21° W.
- 15.25 Trail road, bears nearly N. and S.
- 16.10 Irrigation canal, 15 lks. wide, 3 ft. deep, flows S. from N.
- 20.01 Point for the E. 1/16 sec. cor. of secs. 29 and 32.
- Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

Dependent Resurvey of a Portion of the Subdivision, T. 39 S., R. 16 W.

CHAINS

T39S R16W

E1/16 $\frac{S29}{S32}$

1966

- 25.30 Trail road, bears N. 30° W. and S. 20° E.
- 31.00 Top of small rise, desc. 20 ft. over gentle NW. slope.
- 40.02 The 1/4 sec. cor. of secs. 29 and 32, monumented with a lava rock, 14x8x8 ins., firmly set and plainly mkd. 1/4 on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T39S R16W

½ $\frac{S29}{S32}$

1966

Bury original stone cor. alongside iron post.

Raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.

N. 89° 36' W., beginning new measurement.

Continue over rolling bench land.

- 8.38 Fence, bears N. 52° 25' E. and S. 52° 25' W.
- 17.20 Centerline of State Highway No. 18, bears N. 53° 10' E. and S. 53° 10' W., desc. 135 ft. over NW. slope.
- 40.06 The cor. of secs. 29, 30, 31 and 32, monumented with a lava rock, 17x12x6 ins., firmly set and plainly mkd. 5 notches on E. and 1 on S. edges, with mound of stone to W.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T39S R16W

 $\frac{S30}{S31} \frac{S29}{S32}$

1966

Bury original cor. stone alongside iron post.

Dependent Resurvey of a Portion of the Subdivision T. 39 S. R. 16 W.
CHAINS

Rebuild mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Land, rolling bench.

Soil, sandy.

Timber, scattered juniper.

Undergrowth, sagebrush and black brush.

N. 89° 43' W., bet. secs. 30 and 31.

Over gently rolling bench land through scattered timber.

- 2.25 Trail road, bears S. and N. about 2.00 chs. to junction, thence NE. and NW.
- 8.00 Base of low ridge, asc. 20 ft. over NE. slope.
- 20.00 Low ridge, bears NW. and SE., desc. 50 ft. over gentle W. slope.
- 40.05 The 1/4 sec. cor. of secs. 30 and 31, monumented with a lava rock, 18x12x7 ins., firmly set and plainly mkd. 1/4 on N. face, with small mound of stone to N.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T39S R16W

¼ $\frac{S30}{S31}$

1966

Bury original stone cor. alongside iron post.

Rebuild mound of stone, 3 ft. base, 2 ft. high, N. of cor.

N. 89° 49' W., beginning new measurement.

Continue over rolling bench land. Desc. 55 ft. over gentle NW. slope.

- 5.40 Trail road, bears N. 40° E. and S. 40° W.
- 16.25 Head of small draw, drains N. 30° W., desc. 20 ft. along N. slope. Enter dense timber.
- 30.05 Trail road, bears N. 50° E. and S. 50° W. about 2.00 chs., thence curves SE.

Dependent Resurvey of a Portion of the Subdivision, T. 39 S., R. 16 W.

CHAINS

- 36.00 Rim of bench, bears N. 70° E. and S., desc. 35 ft. over NW. slope.
- 39.32 The cor. of secs. 25, 30, 31 and 36, on the W. bdy. of the Tp., monumented with a lava rock, 16x12x8 ins., firmly set and plainly mkd. 5 notches on N. and 1 on S. edges.
- At the cor. point
- Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
- T39S
R17W R16W
- | | |
|-----|-----|
| S25 | S30 |
| S36 | S31 |
- 1966
- Bury original stone cor. alongside iron post.
- Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.
- Land, rolling bench.
Soil, rocky gravel.
Timber, scattered to dense juniper.
Undergrowth, sagebrush and black brush.
-
- From the cor. of secs. 29, 30, 31 and 32.
- N. 0° 45' E., bet. secs. 29 and 30.
- Over rolling bench land through scattered timber.
- 1.30 Wash, 10 lks. wide, 1 ft. deep, drains W., asc. 100 ft. over gentle SW. slope.
- 9.40 Trail road, bears N. 25° E. and S. 25° W.
- 20.60 Trail road, bears nearly E. and W.
- 32.00 Top of ascent, slopes W., desc. 35 ft. over NW. slope.
- 39.10 Draw, drains S. 50° W., asc. 15 ft. over rocky SE. slope.
- 39.97 The 1/4 sec. cor. of secs. 29 and 30, monumented with a lava rock, 18x15x6 ins., firmly set and plainly mkd. 1/4 on W. face, with small mound of stone to W.
- At the cor. point

De endent Resurve of a Portion of the Subdiv's on
CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 16 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T39S R16W

$\frac{1}{2}$

S30 | S29

1966

Bury original stone cor. alongside iron post.

N. $0^{\circ} 05'$ W., beginning new measurement.

Asc. 150 ft. over rocky SE. slope.

10.30 Top of steep ascent, bears NE. and SW., asc. 60 ft. over gentle SE. slope.

35.20 Low ridge, bears N. 60° E. and S. 60° W., desc. 10 ft. over gentle NW. slope.

40.38 The cor. of secs. 19, 20, 29 and 30, monumented with a lava rock, $24 \times 12 \times 12$ ins., firmly set and plainly mkd. 5 notches on E. and 2 on S. edges, with mound of stone to W.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T39S R16W

S19 | S20

S30 | S29

1966

Bury original stone cor. alongside iron post.

Rebuild mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Land, rolling bench.

Soil, rocky gravel.

Timber, scattered juniper.

Undergrowth, sagebrush and black brush.

From the cor. of secs. 20, 21, 28 and 29.

N. $88^{\circ} 41'$ W., bet. secs. 20 and 29.

Over mountainous land through scattered timber. Asc. 20 ft. over SE. slope.

Dependent Resurvey of a Portion of the Subdivision, T. 39 S., R. 16 W.

CHAINS

- 1.50 Spur, slopes S., desc. 70 ft. over SW. slope.
- 15.00 Head of draw, drains S., asc. 40 ft. over SE. slope.
- 20.06 Point for the E. 1/16 sec. cor. of secs. 20 and 29 not monumented.
Asc. 55 ft. over SE. slope.
- 30.20 Top of ascent, slopes S., desc. 20 ft. over gentle SW. slope.
- 40.12 Point for the 1/4 sec. cor. of secs. 20 and 29 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
- T39S R16W
¼ $\frac{S20}{S29}$
1966
- Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.

Desc. 80 ft. over gentle SW. slope.
- 29.35 S. side of knoll, 6.00 chs. diam., desc. 95 ft. over NW. slope.
- 80.24 The cor. of secs. 19, 20, 29 and 30.

Land, mountainous.
Soil, rocky.
Timber, juniper and pinon.
Undergrowth, sagebrush and black brush.

Survey of the Subdivision, Sec. 29, T. 39 S., R. 16 W.

- From the 1/4 sec. cor. of secs. 29 and 32.

N. 0° 21' E., along the N-S centerline of sec. 29.

Over rolling bench land through scattered timber. Asc. 15 ft. over S. slope.
- 4.60 Top of small knoll, desc. 10 ft. over N. slope.
- 6.61 Fence, bears N. 52° 25' E. and S. 52° 25' W.
- 9.33 Trail road, bears N. 45° E. and S. 52° W.
- 12.70 Centerline of State Highway No. 18, bears N. 50° 25' E. and S. 50° 25' W., asc. 15 ft. over SE. slope.
- 19.92 Point for the center south 1/16 sec. cor. of sec. 29.

Survey of Subdivision, Section 29, T. 39 S., R. 16 W.

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins. in the ground to bedrock, and in a mound of stone, $3\frac{1}{2}$ ft base to top, with brass cap mkd.

T39S R16W
C
S1/16 | S29
C
1966

From this cor., the NW. cor. of new ranch house, bears S. $54^{\circ} 36'$ E., 10.23 chs. dist.

Asc. 90 ft. over gentle SE. slope.

39.84 Intersect the E-W centerline of sec. 29.

Point for the center $1/4$ sec. cor. of sec. 29.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 22 ins. in the ground, with brass cap mkd.

T39S R16W
C
C $\frac{1}{2}$ | S29
1966

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

From this cor., U.S.G.S. triangulation station "Veyo," bears S. $71^{\circ} 50' 47''$ W., 16.68 chs. dist., which is a brass cap set in solid stone, with mound of stone over top of brass cap.

Desc. 35 ft. over gentle NE. slope.

57.65 Trail road, in bottom of small draw, bears N. 80° W. and S. 80° E., asc. 25 ft. over S. slope.

59.78 Point for the center north $1/16$ sec. cor. of sec. 29 not monumented.

Asc. 200 ft. over steep S. slope.

73.00 Top of steep ascent, bears N. 70° E. and S. 70° W., asc. 15 ft. over gentle SE. slope.

79.72 The $1/4$ sec. cor. of secs. 20 and 29.

Land, rolling bench S. portion, mountainous N. portion.
Soil, rocky, gravel.
Timber, scattered juniper.
Undergrowth, sagebrush and black brush.

Survey of Subdivision, Section 29, T. 39 S., R. 16 W.

CHAINS

- From the 1/4 sec. cor. of secs. 28 and 29.
- N. 89° 23' W., on the E-W centerline of sec. 29.
- Over gently rolling bench land, through sagebrush undergrowth.
- 2.40 Trail road, bears N. curving E. and S. curving E.
- 2.57 Fall 34 lks. N. of fence cor., with fence bearing S. and W.
- 4.10 Fence, bears N. 23° E. and S. 23° W. 34 lks. to cor., thence E. Enter cultivated land. Asc. 30 ft. over gentle E. slope.
- 12.44 Fence, bears N. 9° 28' W. and S. 5° 45' W.
- 12.55 Irrigation canal, 15 lks. wide, 3 ft. deep, flows S. 6° W. from N. 10° W.
- 19.99 Point for the center east 1/16 sec. cor. of sec. 29.
- Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.
- T39S R16W
E1/16
C———C
S29
1966
- Raise a mound of stone, 2 ft. base, 1½ ft. high N. of cor.
- Asc. 80 ft. over gentle E. slope.
- 23.25 Fence, bears N. 15° 27' E. and S. 15° 27' W. Leave cultivated land.
- 24.20 Centerline of State Highway No. 18, bears N. 21° 24' E. and S. 17° 47' W.
- 39.98 Intersect the N-S centerline at the center 1/4 sec. cor. of sec. 29, hereinbefore described.
- Asc. 160 ft. over E. slope.
- 52.20 Spur, slopes S. 30° W., desc. 135 ft. over NW. slope.
- 60.25 Head of draw, drains W. about 2.00 chs., thence N. 60° W., asc. 10 ft. over NE. slope.
- 67.50 Spur, slopes N. 30° W., desc. 190 ft. over NW. slope.
- 76.90 Draw, drains S. 50° W., asc. 15 ft. over SE. slope.
- 79.73 The 1/4 sec. cor. of secs. 29 and 30, hereinbefore described.

Survey of Subdivision, Section 29, T. 39 S., R. 16 W.

CHAINS

Land, gently rolling bench E. portion, mountainous W. portion.

Soil, sandy E. portion, rocky W. portion.

Timber, scattered juniper W. portion.

Undergrowth, sagebrush and black brush.

From the E. 1/16 sec. cor. of secs. 29 and 32.

N. 0° 20' E., on the N-S centerline of the SE. 1/4 sec. 29.

Over gently rolling bench land.

12.87 Transmission line, bears N. 77° W. and S. 77° E.

13.10 Irrigation canal, 15 lks. wide, 3 ft. deep, flows E. about 3.00 chs. thence curves S.

19.82 Intersect the E-W centerline of the SE 1/4 sec. 29.

Point for the SE. 1/16 sec. cor. of sec. 29.

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.

T39S R16W

SE 1/16 S29

1966

Raise a mound of stone, 3 ft. base, 1 1/2 ft. high, W. of cor.

From this cor., the NE. cor. of barn, bears S. 60° 27' W, 6.83 chs. dist.

20.00 Trail road, bears N. 75° E. and S. 75° W.

20.22 Fence, bears N. 75° 50' E. and S. 75° 50' W.

25.10 Irrigation canal, 15 lks. wide, 3 ft. deep, flows S. 40° W. from N. 40° E.

39.64 The center east 1/16 sec. cor. of sec. 29.

From the S. 1/16 sec. cor. of secs. 28 and 29.

N. 89° 40' W.; on the E-W centerline of the SE. 1/4 sec. 29.

Over gently rolling bench land.

0.50 Fence, bears about N. 85° W. and S. 85° E.

2.30 Trail road, bears N. 30° E. and S. 30° W.

3.65 Fence, bears N. 3° 35' E. and S. 3° 35' W. 1.34 chs. dist., thence nearly W. N. 3° 35' E. 34 lks. dist., fence from E. intersects fence bearing N. 3° 35' E. and S. 3° 35' W. Enter cultivated land.

Survey of Subdivision, Section 29, T. 39 S., R. 16 W.

CHAINS

- 13.28 Fence, bears N. 9° 10' W., 66 lks., thence about N. 80° W., and S. 9° 10' E., 73 lks., thence nearly E. Leave cultivated land.
- 20.00 Intersect the N-S centerline of the SE. $\frac{1}{4}$ at the SE. 1/16 sec. cor., hereinbefore described.
- 21.42 Fence, bears N. 75° 50' E. and S. 75° 50' W.
- 23.04 Fence, bears S. 18° 30' W. and N. 18° 30' E. At 33 lks. S. 18° 30' W. fence from E. intersects, and at 40 lks. N. 18° 30' E., fence turns W.
- 24.28 Fence, bears N. 18° 30' E. 67 lks. to intersection with E. and W. fence, and S. 18° 30' W.
- 24.80 Irrigation canal, 15 lks. wide, 3 ft. deep, flows S. 42° W.
- 25.25 Fence, on E. side of corral, bears N. 42° E. and S. 42° W.
- 28.35 Fence, on W. side of corral, bears nearly N. and S.
- 31.70 Fence, bears N. 34° 37' E. and S. 34° 37' W. At 1.21 chs. S. fence from E. intersect, and at 2.34 chs. N. fence from E. intersects.
- 33.30 Centerline of State Highway No. 18, bears N. 38° 37' E. and S. 38° 37' W.
- 40.00 The center south 1/16 sec. cor. of sec. 29, hereinbefore described.
- From the center east 1/16 sec. cor. of sec. 29.
N. 0° 28' E., along the N-S centerline of the NE $\frac{1}{4}$ sec. 29.
Asc. 20 ft. over gentle SE. slope.
- 2.85 Cor. of fence, bears East, 6 lks. dist., with fence bearing N. 0° 28' E. and S. 75° 55' W., thence along fence line.
- 3.83 Fence from the SE. intersects N-S fence, continue along fence line.
- 7.63 Cor. of fence, bears E. 6 lks. dist., with fence turning N. 29° 30' E., leave fence line.
- 9.00 Centerline of State Highway No. 18, bears N. 29° 30' E. and S. 29° 30' W.
- 10.41 Beginning of fence, bearing N. 29° 30' E., curving E., bears E. 3 lks. dist. Enter scattered timber.
- 15.05 Trail road, bears N. 15° E. and S. 15° W.
- 19.81 Intersect the E-W centerline of the NE $\frac{1}{4}$ sec. 29.

Survey of Subdivision, Section 29, T. 39 S., R. 16 W.

CHAINS

Point for the NE. 1/16 sec. cor. of sec. 29.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T39S R16W

NE 1/16 S29

1966

Raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

Asc. 250 ft. over SE. slope.

39.62 Point for the E. 1/16 sec. cor. of secs. 20 and 29, hereinbefore described.

From the N. 1/16 sec. cor. of secs. 28 and 29.

N. 89° 01' W., along the E-W centerline of sec. 29.

Over cultivated land.

0.75 Fence, bears N. 50° 50' E. and S. 50° 50' W.

9.30 Fence, bears N. 54° 12' E. and S. 54° 12' W. curving S. Leave cultivated land.

10.30 Centerline of State Highway No. 18, bears N. 54° 12' E. and S. 54° 12' W. curving S.

11.60 Fence, parallel to highway. Enter sagebrush and scattered timber.

15.15 Fence, parallel to highway.

18.10 Trail road, bears N. 55° E. curving E. and S. 55° W. curving S.

20.03 Intersect the N-S centerline of the NE¼ at the NE. 1/16 sec. cor., hereinbefore described.

Asc. 80 ft. over gentle SE. slope.

35.25 Top of ascent, slopes S., desc. 10 ft. along S. slope.

40.06 Point for the center north 1/16 sec. cor., hereinbefore described.

General Description

The portion of Township 39 South, Range 16 West, covered by this survey, is located two miles north of Veyo, Utah and is mostly rolling benchland in section 29, and mountains in section 28. A portion of the east half of section 29 and the northwest quarter of section 28 is

Survey of Subdivision, Section 29, T. 39 S., R. 16 W.

CHAINS

mostly cultivated land. There is a ranch house and building in the northwest quarter of section 28 and a ranch house and buildings in the southeast quarter of section 29. State Highway No. 18, passes through the northwest corner of section 28 and bears southwesterly through section 29, with numerous trail roads from the highway through both sections. The Santa Clara River, flows southwesterly through section 28. No other water except irrigation canals was noted in this survey. The elevation is about 5,000 feet above sea level. The soil is sandy and rocky on the bench and gravelly and covered with large volcanic boulders in the mountains. Timber in the area is mostly scattered juniper with some pinon, and the undergrowth is sagebrush, black brush, buck brush and cacti.

CHAINS

Blank

Page

CERTIFICATE OF SURVEY

I, Glen B. Hatch, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 3d day of September, 1965, I have dependently resurveyed a portion of the subdivisional lines and the subdivision of section 29, Township 39 South, Range 16 West.

of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

(Date)
December 29, 1966
(Date)

(Cadastral Surveyor)
Glen B. Hatch
(Cadastral Surveyor)
SUPERVISORY

CERTIFICATE OF APPROVAL

SUBMITTED FOR APPROVAL
Date _____

BUREAU OF LAND MANAGEMENT,
Washington, D. C.

The foregoing field notes of the dependent resurvey of a portion of the subdivisional lines and the subdivision of sec. 29, T. 39 S., R. 16 W., Salt Lake Meridian, Utah

executed by Glen B. Hatch, Supervisory Cadastral Surveyor having been critically examined and found correct, are hereby approved.

AUG 7 1968

(Date)

W. D. Brown

(Chief, Division of Engineering)

CERTIFICATE OF TRANSCRIPT

_____, is a true copy of the original field notes.

Blank

Page

Blank

Page

ORIGINAL

FIELD NOTES

OF THE
DEPENDENT RESURVEY

OF

THE EAST BOUNDARY

AND

A PORTION OF THE SUBDIVISION

OF

TOWNSHIP 10 SOUTH, RANGE 7 WEST

RECEIVED
SEP 24 AM 10 00 '65
BUREAU OF LAND MANAGEMENT
SALT LAKE CITY, UTAH

Of the SALT LAKE Meridian,

In the State of UTAH

EXECUTED BY

GLEN B. HATCH

SUPERVISORY CADASTRAL SURVEYOR

Under special instructions dated MAY 18, 19 65, which provided for the surveys
included under Group Number 470, approved MAY 20, 1965,
and assignment instructions dated MAY 21, 19 65.

Survey commenced OCTOBER 17, 19 66

Survey completed MAY 11, 19 67

INDEX DIAGRAM

Township 10 SOUTH, Range 7 WEST,

6	5 39	38 4 38	36 3 35	29 2 28	20 1 9 19
7	8	36 9	34 10 33	27 11 26	17 12 8 17
18	17	16	15 32	25 14 24	15 13 7 15
19	20	21	22 32	23 23 23	13 24 5 13
30	29	28	30 27 29	22 26 21	12 25 3 11
31	32	33	34	20 35	10 36 2

Township 10 South, Range 7 West

CHAINS

The E. 3 miles of the S. bdy. (Second Standard Parallel South), was surveyed by A. J. Stewart Jr. in 1872. The W. 3 miles were surveyed by Joseph Gorlinski in 1875. In 1915 H. W. Miller and Isaac Hayes resurveyed this bdy., and in 1933 Ralph Gentry resurveyed the S. bdy. of secs. 32 and 33. The E. bdy. was surveyed by A. J. Stewart Jr. in 1872. In 1907, A. J. Stookey retraced the south 4 miles of this boundary. The N. bdy. was surveyed by A. J. Stewart Jr. in 1872. In 1933, Ralph Gentry resurveyed the W. 1 mile. The E. 5 miles were concurrently resurveyed by Glen B. Hatch in 1966. The W. bdy. was surveyed by Ralph Gentry in 1933. A portion of the subdivision was surveyed by A. J. Stewart Jr. in 1872. In 1933, Ralph Gentry surveyed the remainder and resurveyed a portion of the subdivision. The following field notes are those of the dependent resurvey of the E. bdy. and a portion of the subdivisional lines of Township 10 South, Range 7 West.

The survey was executed in accordance with the Manual of Surveying Instructions, 1947, and Special Instructions dated May 18, 1965.

Before restoring the corners, the lines of the original survey were retraced and a diligent search made for any evidence of the original corners, bearing trees or other calls of the original field note record.

The rules of proportionate measurement were applied to ascertain the position of the lost corners, but not until exhausting every reasonable possibility of finding direct evidence for the control of each particular corner.

The direction of the lines were established on line by hour angle observations on Polaris. The lines were carried forward by sustained angulation.

The lines were run by direct method where the lines were accessible; lines inaccessible were run by triangulation or traverse method. Lines run by triangulation or traverse method were thoroughly checked and verified and in order to simplify the record the diagrams and reductions are omitted from these field notes.

Topography on lines run by triangulation or traverse methods are approximate as scaled from soil conservation maps.

The position of the southeast corner of the township is at Latitude $39^{\circ} 54' 12''$ N. and Longitude $112^{\circ} 34' 24''$ W., as scaled from U. S. Forest Service maps.

The magnetic declination was read at several stations in the township and the average of these readings was found to be $16^{\circ} 15'$ East.

Dependent Resurvey of the East Boundary, T. 10 S., R. 7 W.

Dependent Resurvey of the E. Bdy., T. 10 S., R. 7 W.

CHAINS

Reestablishment of the Survey Executed by A. J. Stewart Jr. in 1872 and the Retracement Executed by A. J. Stookey in 1907, with Establishment of W. 1/4 Sec. Cors. Pertaining to 10 S., R. 6 W. on this line.

Beginning at the standard cor. of Tps. 10 and 11 S., Rs. 6 and 7 W., which is monumented with an iron post, 3 ins. diam., set, and properly mkd. as described in the 1966 field notes of T. 11 S., R. 6 W.

thence

N. 0° 06' W., along the E. bdy. of sec. 36.

Over rolling land through medium timber and sagebrush and shadscale undergrowth; asc. 65 ft. over S. slope.

31.55 Top of ascent, slopes W.; desc. 20 ft. over N. slope.

40.13 Point for the W. 1/4 sec. cor. of sec. 31, T. 10 S., R. 6 W., at midpoint bet. the standard cor. of T. 10 S., Rs. 6 and 7 W., and the closing cor. of secs. 30 and 31.

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.

T10S
R7W R6W
|
½
S31

1967

40.65 The 1/4 sec. cor. of secs. 31 and 36, monumented with a sandstone, 18x10x6 ins., firmly set and plainly mkd. 1/4 on W. face. This cor. will now function as the E. 1/4 sec. cor. of sec. 36 only.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

T10S
R7W R6W
|
½
S36

1967

Bury original stone cor. alongside iron post.

N. 0° 16' E., beginning new measurement.

Dependant Resurvey of the E. Bdy., T. 10 S., R. 7 W.

CRAINS

Desc. 15 ft. over N. slope.

17.60 Base of hill, sec. 40 ft. over S. slope.

23.70 Spur, slopes S. 45° W., thence over gently rolling land.

31.90 Wash, 10 lks. wide, 3 ft. deep, drains S. 45° W.

34.10 Trail road, bears N. 45° E. and S. 45° W.

39.61 The closing cor. of secs. 30 and 31, T. 10 S., R. 6 W., monumented with a granite stone, 20x10x6 ins., firmly set and plainly mkd. 1 notch on S. and 5 on N. edges, with CC on E. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T10S
R7W R6W
S36 | S30 C
 | S31 C
1967

Bury original stone cor. alongside iron post.

Raise a mound of stone, 2½ ft. base, 1½ ft. high, E. of cor.

40.23 The cor. of secs. 25, 30, 31 and 36, monumented with a granite stone, 20x10x6 ins., firmly set and plainly mkd. 1 notch on S. and 5 on N. edges. This cor. will now function as the cor. of secs. 25 and 36 only.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T10S
R7W R6W
S25 | S30
S36 |
1967

Bury original stone cor. alongside iron post.

Raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor.

Land, rolling.

Soil, rocky loam.

Timber, medium dense pinon and juniper.

Undergrowth, sagebrush and shadecale.

N. 0° 06' E., along the E. bdy. of sec. 25.

Dependent Resurvey of the E. Bdy., T. 10 S., R. 7 W.

CHAINS

Over rolling land through medium timber and sagebrush undergrowth. Asc. 50 ft. over gently rolling SE. slope.

22.45 Wash, 40 lks. wide, 5 ft. deep, drains S. 25° E.

39.51 Point for the W. 1/4 sec. cor. of sec. 30, T. 10 S., R. 6 W., at midpoint bet. the closing cor. of secs. 30 and 31, and the closing cor. of secs. 19 and 30.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

T10S
R7W R6W
|
½
|
S30
1967

40.40 Point for the 1/4 sec. cor. of secs. 25 and 30 at proportionate dist.; there is no remaining evidence of the original cor. This point will now function as the E. 1/4 sec. cor. of sec. 25 only.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

T10S
R7W R6W
|
½
|
S25
1967

Asc. 85 ft. over rolling land sloping S.

79.64 The closing cor. of secs. 19 and 30, T. 10 S., R. 6 W., monumented with a sandstone, 13x6x6 ins., firmly set and plainly mkd. 2 notches on S. and 4 on N. edges, with CC on E. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T10S
R7W R6W
|
S25 | S19 C
| S30 C
1967

Bury original stone cor. alongside iron post.

Raise a mound of stone, 2½ ft. base, 1½ ft. high, E. of cor.

Dependent Resurvey of the E. Bdy., T. 10 S., R. 7 W.

CHAINS

80.86

The cor. of secs. 19, 24, 25 and 30, monumented with a sandstone, 18x8x6 ins., firmly set and plainly mkd. 2 notches on S. and 4 on N. edges, with mound of stone W. This cor. will now function as the cor. of secs. 24 and 25 only.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T10S
R7W R6W
S24 | S19
S25 |
1967

Bury original stone cor. alongside iron post.

Rebuild mound of stone, 3 ft. base, 1½ ft. high, W. of cor.

Land, rolling.

Soil, rocky loam.

Timber, medium dense juniper and pinon.

Undergrowth, sagebrush.

N. 0° 06' E., along the E. bdy. of sec. 24.

Over mountainous land through dense timber. Asc. 180 ft. over SE. slope.

0.14

Fence, bears E. and W.

39.02

Point for the W. 1/4 sec. cor. of sec. 19, T. 10 S., R. 6 W., at midpoint bet. the closing cor. of secs. 19 and 30, and the closing cor. of secs. 18 and 19.

Set an iron post, 30 ins. long, 2½ ins. diam., 16 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T10S
R7W R6W
½ | S19
1967

40.64

The 1/4 sec. cor. of secs. 19 and 24, monumented with a granite stone, 20x10x10 ins., firmly set and plainly mkd. 1/4 on W. face. This cor. will now function as the E. 1/4 sec. cor. of sec. 24 only.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.

Dependent Resurvey of the E. bdy., T. 10 S., R. 7 W.

CHAINS

T10S
R7W R6W
½
S24
1967

Bury original stone cor. alongside iron post.

Raise a mound of stone, 2½ ft. base, 1½ ft. high,
W. of cor.

N. 0° 09' E., beginning new measurement.

Asc. 10 ft. over SE. slope.

- 2.30 Spur, slopes S. 25° W., desc. 35 ft. over NW. slope.
- 25.80 Wash, drains N. 60° W., asc. 40 ft. over SW. slope.
- 38.62 The closing cor. of secs. 18 and 19, T. 10 S., R. 6 W.,
monumented with a granite stone, 20x10x8 ins., firmly
set and plainly mkd. 3 notches on N. and S. edges and
CC on E. face, and mound of stone to E.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins.
in the ground, with brass cap mkd.

T10S
R7W R6W
S24 | S18 C
 | S19 C
1967

Bury original stone cor. alongside iron post.

Rebuild mound of stone, 3 ft. base, 2 ft. high,
E. of cor.

- 40.30 The cor. of secs. 13, 18, 19 and 24, monumented with
a granite stone, 20x7x5 ins., firmly set and plainly
mkd. 3 notches on N. and S. edges, with mound of stone
to W. This cor. will now function as the cor. of secs.
13 and 24 only.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins.
in the ground, with brass cap mkd.

T10S
R7W R6W
S13 | S18
S24 |
1967

Bury original stone cor. alongside iron post.

Rebuild mound of stone, 3 ft. base, 1½ ft. high,
W. of cor.

Dependent Resurvey of the E. Bdy., T. 10 S., R. 7 W.

CHAINS

Land, mountainous.
Soil, rocky loam.
Timber, dense pinon and juniper.
Undergrowth, sagebrush.

N. 0° 31' E., along the E. bdy. of sec. 13.

Over mountainous land through dense timber; asc. 60 ft. over S. slope.


20.20 Spur, slopes S. 45° W.; desc. 35 ft. over NW. slope.

23.80 Trail road, in draw, bears N. 45° E. and S. 45° W.; asc. 105 ft. over SE. slope.

35.70 Spur, slopes S. 45° W.; desc. 65 ft. over NW. slope.

38.54 Point for the W. 1/4 sec. cor. of sec. 18, T. 10 S., R. 6 W., at midpoint bet. the closing cor. of secs. 18 and 19 and the closing cor. of secs. 7 and 18.


Set an iron post, 30 ins. long, 2½ ins. diam., 15 in. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.



41.11 The 1/4 sec. cor. of secs. 13 and 18, monumented with a sandstone, 15x10x6 ins., firmly set and plainly mkd. 1/4 on W. face. This cor. will now function as the E. 1/4 sec. cor. of sec. 13 only.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, with brass cap mkd.



Bury original stone cor. alongside iron post.

Raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor.

N. 0° 03' E., beginning new measurement.

Desc. 20 ft. over NW. slope.

8.00 SouthOak Brush Creek, drains S. 20° W.; asc. 300 ft. over S. slope.

Dependent Resurvey of the E. Bdy., T. 10 S., R. 7 W.

CHAINS

- 37.15 Ridge, bears E. and W.; desc. 35 ft. over NW. slope.
- 37.65 The closing cor. of secs. 7 and 18, T. 10 S., R. 6 W., monumented with a sandstone, 18x10x8 ins., firmly set and plainly mkd. 4 notches on S. and 2 on N., with CC on E. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T10S
R7W R6W
S13 $\frac{S7}{S18}$ C

1967

Bury original stone cor. alongside iron post.

Raise a mound of stone, 2½ ft. base, 1½ ft. high, E. of cor.

- 39.37 The cor. of secs. 7, 12, 13 and 18, monumented with a sandstone, 18x10x5 ins., firmly set and plainly mkd. 4 notches on S. and 2 on N. edges. This cor. will now function as the cor. of secs. 12 and 13 only.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T10S
R7W R6W
S12 S7
S13 |

1967

Bury original stone cor. alongside iron post.

Land, mountainous.
Soil, rocky loam.
Timber, dense pinon and juniper.
Undergrowth, sagebrush and scattered oakbrush.

Reestablishment of the Survey
Executed by A. J. Stewart in
1872.

N. 0° 57' E., along the E. bdy. of sec. 12.

Over mountainous land through dense timber. By triangulation; desc. about 175 ft. over NW. slope.

- 21.50 Black Crook Creek, drains S. 40° W.; asc. about 100 ft. over SW. slope.

- 34.25 End triangulation.

Dependent Resurvey of the E. Bdy., T. 10 S., R. 7 W.

CHAINS

40.15

Point for the 1/4 sec. cor. of secs. 7 and 12 at proportionate dist.; there is no remaining evidence of the original cor. This point will now function as the E. 1/4 sec. cor. of sec. 12 only.

Set an iron post, 30 ins. long, 2½ ins. diam., 14 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T10S
R7W R6W
½ |
S12 |

1967

By triangulation, asc. about 100 ft. over SW. slope.

53.60

Spur, slopes W. End triangulation. Desc. 30 ft. over N. slope.

55.00

Small draw, drains W., asc. 30 ft. over S. slope.

59.40

Spur, slopes W., desc. 30 ft. over NW. slope.

61.00

Draw, drains S. 70° W., asc. 120 ft. over SE. slope.

72.10

Ridge, bears nearly E. and W., desc. 120 ft. over N. slope.

80.30

The cor. of secs. 1, 6, 7 and 12, monumented with a white flintstone, 20x10x6 ins., firmly set and plainly mkd. 5 notches on S. and 1 on N. edges. This cor. will now function as the cor. of secs. 1 and 12 only.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

T10S
R7W R6W
S1 |
S12 |

1966

Bury original stone cor. alongside iron post.

Land, mountainous.

Soil, rocky loam.

Timber, dense pinon and juniper.

Undergrowth, sagebrush and buckbrush.

N. 12° 07' E., along the E. bdy. of sec. 1.

Over mountainous land through scattered timber and dense undergrowth. Desc. 20 ft. over NE. slope.

Dependent Resurvey of the E. Bdy., T. 10 S., R. 7 W.

CHAINS	
3.70	Trail road, in draw, bears nearly E. and W., asc. 85 ft. over S. slope.
14.50	Top of ascent, slopes W., desc. 30 ft. over NW. slope.
18.70	Draw, drains S. 45° W., asc. 20 ft. over SE. slope.
25.75	Ridge, bears N. 45° E. and S. 45° W., desc. 15 ft. over NW. slope.
29.25	Draw, drains S. 60° W., asc. 80 ft. over S. slope.
38.54	The cor. of Tps. 9 and 10 S., Rs. 6 and 7 W., monumented with an iron post, 2½ ins. diam., set, mkd. and witnessed as described in the 1966 field notes of T. 9 S., R. 7 W.
	Land, mountainous. Soil, rocky loam. Timber, scattered juniper. Undergrowth, dense sagebrush, scattered oakbrush and buckbrush.
Dependent Resurvey of a Portion of the Subdivision, T. 10 S., R. 7 W.	
Reestablishment of the Survey Executed by A. J. Stewart Jr. in 1872.	
From the standard cor. of secs. 35 and 36, on the S. bdy. of the Tp., monumented with an iron post, 3 ins. diam., set, mkd. and witnessed as described in the official record of the 1915 survey.	
N. 0° 08' W., bet. secs. 35 and 36.	
Over gently rolling land through widely scattered timber, and along W. side of fence, through partially reseeded area.	
17.20	Trail road, bears nearly E. and W.
40.22	Point for the 1/4 sec. cor. of secs. 35 and 36, at proportionate dist.; there is no remaining evidence of the original cor.
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
<p>T10S R7W</p> <p>½</p> <p>S35 S36</p> <p>1967</p>	

Dependent Resurvey of a Portion of the Subdivision,
T. 10 S., R. 7 W.

CHAINS

Raise a mound of stone, $2\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

Asc. 35 ft. over gently rolling land. Continue along W. side of fence.

80.44 Point for the cor. of secs. 25, 26, 35 and 36, at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 12 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T10S R7W

S26	S25
S35	S36

1967

Land, gently rolling.

Soil, rocky loam.

Timber, scattered pinon and juniper in uncleared area.

Undergrowth, sagebrush, shadscale and grass.

From the cor. of secs. 25 and 36, on the E. bdy. of the Tp.

S. $89^{\circ} 44'$ W., bet. secs. 25 and 36.

Over gently rolling land through scattered timber.

0.90 Wash, 20 lks. wide, 4 ft. deep, drains S. 5° E.

5.90 Wash, 30 lks. wide, 10 ft. deep, drains S. 5° E.

36.10 Trail road, bears N. 3° E. and S. 3° W.

40.27 Point for the $1/4$ sec. cor. of secs. 25 and 36 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T10S R7W

$\frac{1}{4}$	S25
	S36

1967

Raise a mound of stone, $2\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

Desc. 45 ft. over gently rolling land.

61.15 Wash 10 lks. wide, 4 ft. deep, drains S. 40° W.

79.75 Fence, bears N. $0^{\circ} 40'$ E. and S. $0^{\circ} 40'$ W.

80.54 The cor. of secs. 25, 26, 35 and 36.

Dependent Resurvey of a Portion of the Subdivision,
T. 10 S., R. 7 W.

CHAINS

Land, gently rolling.
Soil, rocky loam.
Timber, scattered juniper.
Undergrowth, sagebrush and shadscale.

N. 0° 35' E., bet. secs. 25 and 26.

Desc. 20 ft. over gently rolling land through scattered timber and dense undergrowth and along W. side of fence.

3.00 South Oak Brush Creek, dry, drains S. 70° W.; asc. S. slope.

40.22 Point for the 1/4 sec. cor. of secs. 25 and 26 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T10S R7W

½
S26 | S25

1967

from which

A juniper, 6 ins. diam., bears N. 25° W., 19 lks. dist., mkd. 1/4SBT.

Raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor.

Continue over gently rolling land.

80.44 Point for the cor. of secs. 23, 24, 25 and 26 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T10S R7W

S23 | S24
S26 | S25

1967

from which

A juniper, 12 ins. diam., bears N. 85° E., 7 lks. dist., mkd. T10S R7W S24 BT.

A juniper, 10 ins. diam., bears S. 35° E., 21 lks. dist., mkd. T10S R7W S25 BT.

Raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor.

Land, gently rolling.
Soil, rocky loam.
Timber, scattered juniper.
Undergrowth, sagebrush and shadscale.

Dependent Resurvey of a Portion of the Subdivision,
T. 10 S., R. 7 W.

CHAINS

From the cor. of secs. 24 and 25, on the E. bdy. of the Tp.

S. 89° 28' W., bet. secs. 24 and 25.

Over rolling land through reseeded area. Desc. 55 ft. over W. slope.

13.85 Wash, 10 lks. wide, 2 ft. deep, drains S. 5° W.

18.10 Wash, 10 lks. wide, 2 ft. deep, drains S. 20° E.

27.30 Trail road, bears N. 16° E. and S. 16° W.

31.50 South Oak Brush Creek, drains S. 30° W.

39.96 Point for the 1/4 sec. cor. of secs. 24 and 25 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T10S R7W

¼ $\frac{S24}{S25}$

1967

Raise a mound of stone, 2½ ft. base, 1½ ft. high, N. of cor.

Desc. 95 ft. over rolling SW. slope.

79.28 Fence, bears N. 0° 40' E. and S. 0° 40' W.

79.92 The cor. of secs. 23, 24, 25 and 26.

Land, rolling.

Soil, rocky loam.

Timber, scattered juniper.

Undergrowth, sagebrush and shadscale.

N. 0° 53' E., bet. secs. 23 and 24.

Over rolling land through juniper timber, along W. side of fence.

1.23 Cor. of fence, is 50 lks. E. of line, with fence bearing about S. 0° 40' W. and N. 0° 40' E. and nearly E.

Dependent Resurvey of a Portion of the Subdivision,
T. 10 S., R. 7 W.

CHAINS

19.90 Desc. 65 ft. over N. slope.

24.80 Wash, 15 lks. wide, 3 ft. deep, drains W., asc. 60 ft.
over S. slope.

40.23 Point for the 1/4 sec. cor. of secs. 23 and 24 at
proportionate dist.; there is no remaining evidence of
the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins.
in the ground, and in a collar of stone, with brass
cap mkd.

T10S R7W

½
S23 | S24
↓
1967

Asc. 80 ft. over gently rolling S. slope.

80.46 The cor. of secs. 13, 14, 23 and 24, monumented with
a sandstone, 12x10x8 ins., firmly set and plainly mkd.
1 notch on E. and 3 on S. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T10S R7W

S14 | S13
S23 | S24

1967

Bury original stone cor. alongside iron post.

Raise a mound of stone, 2½ ft. base, 1½ ft. high,
W. of cor.

Land, rolling.

Soil, rocky loam.

Timber, juniper.

Undergrowth, sagebrush and shadscale.

From the cor. of secs. 13 and 24, on the E. bdy. of
the Tp.

Dependent Resurvey of a Portion of the Subdivision,
T. 10 S., R. 7 W.

CHAINS	
	S. 89° 06' W., bet. secs. 13 and 24.
	Over mountainous land through scattered timber. Desc. 55 ft. over W. slope.
6.00	South Oak Brush Creek, dry, drains southerly; asc. over
9.00	Trail road, bears N. 45° E. and South. <u>E. slope.</u>
17.60	Spur, slopes nearly S., desc. 175 ft. over W. slope. Enter dense timber.
27.20	Leave dense timber, enter cleared land. Thence over gently rolling land.
39.41	Point for the 1/4 sec. cor. of secs. 13 and 24 at proportionate dist.; there is no remaining evidence of the original cor.
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T10S R7W
	¼ — $\frac{S13}{S24}$
	1967
	Raise a mound of stone, 2½ ft. base, 1½ ft. high, N. of cor.
	Continue over gently rolling land.
41.65	Trail road, bears N. 32° E. and S. 32° W.
59.00	Black Crook Creek, dry, drains S.
70.70	Trail road, bears N. 72° W. and S. 72° E.
73.30	Trail road, bears N. and S.
78.74	Fence, bears about N. 0° 40' E. and S. 0° 40' W.
78.82	The cor. of secs. 13, 14, 23 and 24.
	Land, mountainous, E. portion; rolling W. portion. Soil, rocky loam. Timber, dense juniper E. portion; cleared W. portion. Undergrowth, sagebrush and grass.
	N. 0° 20' E., bet. secs. 13 and 14.

Dependent Resurvey of a Portion of the Subdivision,
T. 10 S., R. 7 W.

CHAINS

Over rolling land through scattered timber and sagebrush in cleared area. Asc. 95 ft. over gently rolling land sloping SW.

- 2.00 Trail road, bears E. and W.
20.00 Wash, 10 lks. wide, 3 ft. deep, drains S. 45° W.; asc. over SE. slope.
39.85 Point for the 1/4 sec. cor. of secs. 13 and 14 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 16 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T10S R7W

½

S14 | S13

1967

Asc. 190 ft. over rolling hills.

- 79.70 The cor. of secs. 11, 12, 13 and 14, monumented with a sandstone, 18x12x10 ins., firmly set and plainly mkd. 1 notch on E. and 4 on S. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T10S R7W

S11 | S12
S14 | S13

1967

Bury original stone cor. alongside iron post.

Raise a mound of stone, 3 ft. base, 1½ ft. high W. of cor.

Land, rolling S. portion; mountainous N. portion
Soil, rocky loam.
Timber, medium dense pinon and juniper.
Undergrowth, sagebrush.

Dependent Resurvey of a Portion of the Subdivision,
T. 10 S., R. 7 W.

CHAINS

From the cor. of secs. 12 and 13, on the E. bdy. of the Tp.

S. 88° 28' W., bet. secs. 12 and 13.

Over mountainous land through dense timber. By triangulation; desc. 175 ft. over NW. slope.

20.00 Black Crook Creek, dry, drains S. 30° W.; asc. 200 ft. over SE. slope.

35.90 Ridge, bears N. 20° E. and S. 20° W. End triangulation; desc. 15 ft. over NW. slope.

39.43 Point for the 1/4 sec. cor. of secs. 12 and 13 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 15 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T10S R7W

¼ — $\frac{S12}{S13}$

1967

Desc. 285 ft. over NW. slope.

54.00 Draw, drains S. 35° W.; asc. 130 ft. over SE. slope.

63.70 Ridge, bears N. 35° E. and S. 35° W.; desc. 125 ft. over NW. slope.

74.25 Draw, drains S. 20° W.; asc. 55 ft. over SE. slope.

78.86 The cor. of secs. 11, 12, 13 and 14.

Land, mountainous.

Soil, rocky loam.

Timber, dense pinon and juniper.

Undergrowth, sagebrush and scattered buckbrush.

N. 0° 23' W., bet. secs. 11 and 12.

Over mountainous land through dense timber; asc. 80 ft. over SE. slope.

Dependent Resurvey of a Portion of the Subdivision,
T. 10 S., R. 7 W.

CHAINS

- 8.95 Spur, slopes S. 40° W.; desc. 70 ft. over NW. slope.
Enter scattered timber.
- 9.86 Old abandoned fence line, bears E. and W.
- 23.35 Draw, drains S. 30° W., from N.; asc. 35 ft. along draw.
- 32.80 Elderberry Creek, drains S. from N. 15° E.; asc. 60 ft.
over SE. slope.
- 40.04 Fence, bears W. and E. 75 lks. to cor.; thence N.
Enter cleared area.
- 41.22 Point for the 1/4 sec. cor. of secs. 11 and 12 at
proportionate dist.; there is no remaining evidence
of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins.
in the ground, and in a mound of stone, 3 ft. base to
top, with brass cap mkd.

T10S R7W

½
S11 | S12
1967

Asc. 160 ft. over SE. slope.

- 61.60 Spur, slopes S. 30° W., with trail road along top;
desc. 25 ft. over NW. slope. Leave cleared area,
enter scattered timber.
- 70.65 Small draw, drains S. 35° W.; asc. 45 ft. over SE.
slope.
- 75.95 Spur, slopes W.; desc. 15 ft. over gentle N. slope.
- 82.44 The cor. of secs. 1, 2, 11 and 12, monumented with a
flintstone, 18x10x4 ins., firmly set and plainly mkd.
1 notch on E. and 5 on S. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins.
in the ground, and in a collar of stone, with brass cap
mkd.

T10S R7W

S2 | S1
S11 | S12
1966

Bury original stone cor. alongside iron post.

Land, mountainous.
Soil, rocky loam.
Timber, dense to scattered pinon and juniper.
Undergrowth, sagebrush.

Dependent Resurvey of a Portion of the Subdivision,
T. 10 S., R. 7 W.

CHAINS

From the cor. of secs. 1 and 12, on the E. bdy. of the Tp.

S. 89° 56' W., bet. secs. 1 and 12.

Over mountainous land through scattered to dense timber.
Asc. 35 ft. over NE. slope.

- 4.65 Spur, slopes N. 15° W., desc. 55 ft. over W. slope.
- 7.30 Draw, drains N., asc. 30 ft. over NE. slope.
- 13.55 Ridge, bears N. and S., desc. 75 ft. over W. slope.
- 20.15 Draw, drains N., asc. 30 ft. over NE. slope.
- 23.60 Spur, slopes S. 40° W., desc. 125 ft. over NW. slope.
- 38.55 Draw, drains N., asc. 10 ft. over E. slope.
- 40.26 The 1/4 sec. cor. of secs. 1 and 12, monumented with a
cobblestone, 14x12x5 ins., firmly set and plainly mkd.
1/4 on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins.
in the ground, and in a collar of stone, with brass cap
mkd.

T10S R7W

½ S1
S12

1966

Bury original stone cor. alongside iron post.

N. 89° 44' W., beginning new measurement.

Desc. 10 ft. over NW. slope.

- 2.50 Wash, in small draw, drains N. 45° W., desc. 60 ft.
over NW. slope.
- 7.90 Elderberry Creek, drains S. 45° W.
- 15.50 Draw, drains S. 45° W., asc. 95 ft. over E. slope.
- 31.20 Trail road, bears N. 30° E. and S. 30° W.
- 33.50 Spur, slopes nearly S. curving SW., desc. 70 ft. along
N. slope.
- 39.04 Fence, bears N. and S.
- 40.48 The cor. of secs. 1, 2, 11 and 12.

4

Dependent Resurvey of a Portion of the Subdivision,
T. 10 S., R. 7 W.

CHAINS

Land, mountainous.
Soil, rocky loam.
Timber, scattered to dense pinon and juniper.
Undergrowth, sagebrush, with scattered oak brush
E. portion.

N. 13° 06' E., bet. secs. 1 and 2.

Over mountainous land through dense timber. Desc. 55
ft. over N. slope.

6.70 Fence, bears nearly N. and S.

8.70 Draw, drains W., asc. 120 ft. over S. slope.

18.65 Trail road, bears E. and W. Leave timber.

19.35 Ridge, bears E. and W., desc. 15 ft. over gentle N.
slope.

37.45 The cor. of secs. 1, 2, 35 and 36, on the N. bdy. of
the Tp., monumented with an iron post, 2½ ins. diam.,
set, mkd. and witnessed as described in the 1966 field
notes of T. 9 S., R. 7 W.

Land, mountainous.
Soil, rocky loam.
Timber, dense to scattered juniper S. portion; no
timber N. portion.
Undergrowth, sagebrush and scattered buck brush.

From the standard cor. of secs. 34 and 35, on the S. bdy.
of the Tp., monumented with an iron post, 3 ins. diam.,
set, mkd. and witnessed as described in the official
record of the 1915 survey.

N. 0° 01' W., bet. secs. 34 and 35.

Over gently rolling land, along fence line and through
scattered timber.

39.98 Point for the 1/4 sec. cor. of secs. 34 and 35 at pro-
portionate dist.; there is no remaining evidence of the
original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins.
in the ground, and in a collar of stone, with brass cap mkd
mkd.

T10S R7W

½
S34 | S35

1967

Continue over gently rolling land along fence line.

Dependent Resurvey of a Portion of the Subdivision,
T. 10 S., R. 7 W.

CHAINS

- 54.90 Meadow Creek, dry, in a wash, 15 lks. wide, 3 ft. deep, drains S. 45° E.
- 79.65 Fence, bears W. 25 lks.; thence N. 30 lks. to fence, bearing W. and NE.
- 79.85 Trail road, bears N. 20° W. and S. 20° E.
- 79.96 Point for the cor. of secs. 26, 27, 34 and 35, at extension intersection of fences from N., S. and W. This point is harmoniously related to existant original cors., and is accepted as a perpetuation of the original cor. point.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.

T10S R7W

S27	S26
S34	S35

1967

Land, gently rolling.
Soil, loam.
Timber, scattered juniper.
Undergrowth, sagebrush and shadscale.

From the cor. of secs. 25, 26, 35 and 36.

S. 89° 45' W., bet. secs. 26 and 35.

Over rolling land through dense timber; desc. 95 ft. over rolling SW. slope.

- 10.00 South Oak Brush Creek, dry, drains S. 70° W.
- 18.50 Small draw, drains S. 50° W.
- 40.02 Point for the 1/4 sec. cor. of secs. 26 and 35 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T10S R7W

¼	S26
	S35

1967

Raise a mound of stone, 2½ ft. base, 1½ ft. high, N. of cor.

Desc. 35 ft. over gently rolling SW. slope.

- 48.40 Leave dense timber.
- 56.50 Elderberry Creek, dry, drains SW.
- 65.30 Wash, 10 lks. wide, 5 ft. deep, drains S. 43° E.

Dependent Resurvey of a Portion of the Subdivision,
T. 10 S., R. 7 W.

CHAINS

74.80 Small stream of water, in wash, drains S. 30° E.; asc. 10 ft. over gentle NE. slope.

76.50 Erickson Pass Road, bears S. 10° W. and curves N.

80.04 The cor. of secs. 26, 27, 34 and 35.

Land, rolling.
Soil, rocky loam.
Timber, dense juniper E. portion; scattered W. portion.
Undergrowth, sagebrush and shadscale.

N. 0° 33' E., bet. secs. 26 and 27.

Over gently rolling land through widely scattered timber.

0.15 Fence, bears SW. and N.; thence along fence line.

7.45 Small stream of water, flows S. 45° E.

8.37 Fence, bears N. 45° E., continue along fence line.

20.03 Fence, bears W. Leave fence line.

20.70 Trail road, bears N. 45° W. and S. 20° E.

40.21 Point for the 1/4 sec. cor. of secs. 26 and 27 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T10S R7W

½
S27 | S26

1967

Raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor.

Continue over gently rolling land.

70.00 Small draw, 15 ft. deep, drains S. 50° E.; asc. 35 ft. over SW. slope.

80.42 Point for the cor. of secs. 22, 23, 26 and 27 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T10S R7W

S22 | S23
S27 | S26

1967

Dependent Resurvey of a Portion of the Subdivision,
T. 10 S., R. 7 W.

CHAINS

Raise a mound of stone, 3 ft. base, 1½ ft. high,
W. of cor.

Land, gently rolling.
Soil, rocky loam.
Timber, widely scattered juniper.
Undergrowth, sagebrush and grass.

From the cor. of secs. 23, 24, 25 and 26.

S. 89° 43' W., bet. secs. 23 and 26.

Desc. 85 ft. over rolling W. slope through scattered
timber.

19.60 Elderberry Creek, dry, in a wash, 20 lks. wide, 6 ft.
deep, drains S. 50° W.; thence over gently rolling land.

40.00 Point for the 1/4 sec. cor. of secs. 23 and 26 at pro-
portionate dist.; there is no remaining evidence of the
original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins.
in the ground, with brass cap mkd.

T10S R7W

¼ — $\frac{S23}{S26}$

1967

Raise a mound of stone, 2½ ft. base, 1½ ft. high,
N. of cor.

Desc. 30 ft. over gently rolling land.

49.50 Wash, 10 lks. wide, 4 ft. deep, in small draw, drains
S. 45° E.

55.70 Erickson Pass Road, bears N. 4° W. and S. 4° E.

55.90 Fence, parallel to road; asc. 15 ft. over gentle E.
slope.

63.20 Wash, drains S.

64.80 Enter reseeded area.

80.00 The cor. of secs. 22, 23, 26 and 27.

Land, gently rolling.
Soil, loam.
Timber, scattered juniper.
Undergrowth, sagebrush and grass.

N. 0° 38' E., bet. secs. 22 and 23.

Over gently rolling land through scattered timber.

Dependent Resurvey of a Portion of the Subdivision,
T. 10 S., R. 7 W.

CHAINS

Point for the 1/4 sec. cor. of secs. 22 and 23 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T10S R7W

 ½
S22 | S23

1967

Raise a mound of stone, 3 ft. base, 1½ ft. high, W. of cor.

Continue over gently rolling land.

60.20 Trail road, bears N. 55° E. and S. 55° W.

61.05 Fence, parallel to trail road.

80.42 Point for the cor. of secs. 14, 15, 22 and 23 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T10S R7W

 S15 | S14
 S22 | S23

1967

Raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor.

From this cor. Black Spring bears S. 67° 20' E., 20.20 chs. dist.

Land, gently rolling.

Soil, loam.

Timber, scattered juniper.

Undergrowth, sagebrush and grass.

From the cor. of secs. 13, 14, 23 and 24.

S. 89° 47' W., bet. secs. 14 and 23.

Over gently rolling land through dense timber.

3.50 Elderberry Creek, dry, drains S.

5.90 Trail road, bears N. 35° E. and S. 35° W.

40.16 Point for the 1/4 sec. cor. of secs. 14 and 23 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd.

Dependent Resurvey of a Portion of the Subdivision,
T. 10 S., R. 7 W.

CHAINS

T10S R7W

 $\frac{1}{4}$ — $\frac{S14}{S23}$

1967

Raise a mound of stone, $2\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high,
N. of cor.

Continue over gently rolling land through scattered
timber.

58.75 Wash, drains S.

62.50 Erickson Pass Road, bears N. 4° E. and S. 4° W.78.65 Erickson Trail Road, bears N. 13° W. and S. 13° E.79.05 Fence, bears N. 13° W. and S. 13° E.

80.32 The cor. of secs. 14, 15, 22 and 23.

Land, gently rolling.
Soil, rocky loam.
Timber, dense to scattered juniper.
Undergrowth, sagebrush.

N. $0^\circ 01'$ E., bet. secs. 14 and 15.

Over gently rolling land through scattered timber.

40.21 Point for the $1/4$ sec. cor. of secs. 14 and 15 at pro-
portionate dist.; there is no remaining evidence of the
original cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T10S R7W

 $\frac{1}{4}$

S15|S14

1967

Raise a mound of stone, $2\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high,
W. of cor.

Asc. 180 ft. over S. slope.

55.10 Spur, slopes E.; desc. 25 ft. over NE. slope.

23.
 Dependent Resurvey of a Portion of the Subdivision,
 T. 10 S., R. 7 W.

CHAINS

- 63.15 Draw, drains E.; asc. 75 ft. over S. slope.
- 69.25 Trail road, bears irregularly W. and N. 55° E.
- 69.75 Ridge, bears nearly E. and W.; desc. 35 ft. over NW. slope.
- 80.42 The cor. of secs. 10, 11, 14 and 15, monumented with a flintstone, 18x8x6 ins., firmly set and plainly mkd. 2 notches on E. and 4 on S. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 16 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T10S R7W

S10	S11
S15	S14

1966

Bury original stone cor. alongside iron post.

Raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor.

Land, rolling S. portion; mountainous N. portion.
 Soil, rocky loam.
 Timber, medium dense pinon and juniper.
 Undergrowth, sagebrush.

From the cor. of secs. 11, 12, 13 and 14.

N. 89° 41' W., bet. secs. 11 and 14.

Over mountainous land through scattered to medium dense timber; asc. 15 ft. over SE. slope.

- 5.70 Spur, slopes S. 20° W; desc. 85 ft. over NW. slope.
- 10.75 Elderberry Creek, dry, drains S. 20° W; asc. 30 ft. over SE. slope.
- 21.48 Old abandoned fence line, bears N. and S.
- 22.50 Spur, slopes S. 30° W; desc. 75 ft. over NW. slope.
- 30.85 Draw, drains S.; asc. 70 ft. over E. slope.
- 37.50 Spur, slopes S.; desc. 15 ft. over W. slope.
- 40.37 Point for the 1/4 sec. cor. of secs. 11 and 14 at proportionate dist.; there is no remaining evidence of the original cor.

Dependent Resurvey of a Portion of the Subdivision,
T. 10 S., R. 7 W.

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T10S R7W

¼ $\frac{S11}{S14}$

1967

- 40.70 Draw, drains S.; asc. 120 ft. over E. slope.
- 48.95 Spur, slopes S. 10° W.; desc. 175 ft. over W. slope.
- 56.50 Draw, drains S.; asc. 160 ft. over SE. slope.
- 56.70 Old trail road, bears N. and S.
- 58.25 Erickson Pass Road, bears irregularly N. and S.
- 67.80 Ridge, bears N. 20° E. and curves W.; desc. 25 ft. over gentle NW. slope.
- 72.30 Trail road, bears N. 70° E. and S. 70° W.
- 80.74 The cor. of secs. 10, 11, 14 and 15.

Land, mountainous.
Soil, rocky loam.
Timber, medium dense pinon and juniper.
Undergrowth, sagebrush and buckbrush.

N. 0° 09' W., bet. secs. 10 and 11.

Over mountainous land through scattered timber; desc. 90 ft. over NW. slope.

- 20.15 Slope changes; desc. 10 ft. along W. slope.
- 28.15 Slope changes; desc. 55 ft. over NW. slope.
- 39.17 The ¼ sec. cor. of secs. 10 and 11, monumented with a granite stone, 18x12x8 ins., firmly set and plainly mkd. ¼ on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T10S R7W

¼
S10|S11

1966

from which

Dependent Resurvey of a Portion of the Subdivision,
T. 10 S., R. 7 W.

CHAINS

A juniper, 5 ins. diam., bears S. 45° W., 6½ lks. dist., mkd. 1/4 S10 BT.

Bury original stone cor. alongside iron post.

Raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor.

N. 0° 20' W., beginning new measurement.

Desc. 30 ft. over NW. slope.

0.62 Fence, bears E. and W. Enter cleared area.

6.60 Government Creek, drains N. 40° W., curving N.; asc. 65 ft. over SW. slope.

9.70 Erickson Pass Road, bears S. 46° E. and N. 46° W., curving N. 15° W.

17.15 Spur, slopes W.; desc. 55 ft. over N. slope.

25.40 Draw, drains W.; asc. 105 ft. over S. slope.

35.15 Spur, slopes W.; desc. 20 ft. over gentle N. slope.

42.63 The cor. of secs. 2, 3, 10 and 11, monumented with a flintstone, 16x8x6 ins., firmly set and plainly mkd. 2 notches on E. and 5 on S. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T10S R7W

S3|S2
S10|S11

1966

Bury original stone cor. alongside iron post.

Raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

Land, mountainous.

Soil, rocky loam.

Timber, scattered pinon and juniper S. portion; cleared N. portion.

Undergrowth, sagebrush and grass.

From the cor. of secs. 1, 2, 11 and 12.

S. 89° 46' W., bet. secs. 2 and 11.

Dependent Resurvey of a Portion of the Subdivision,
T. 10 S., R. 7 W.

CHAINS

- Over rolling mountain land through dense timber to N. and cleared to S.; desc. 45 ft. over NW. slope.
- 12.25 Draw, drains N. 45° W.; asc. 20 ft. over NE. slope.
- 17.50 Ridge, bears N. 45° W. and S. 45° E.; desc. 185 ft. over SW. slope.
- 40.10 Draw, drains N. 45° W.; asc. 10 ft. over NE. slope.
- 40.24 Point for the 1/4 sec. cor. of secs. 2 and 11 at proportionate dist.; there is no remaining evidence of the original cor.
- Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.
- T10S R7W
- $$\frac{1}{2} \frac{S2}{S11}$$
- 1966
- Asc. 25 ft. over NE. slope.
- 44.85 Ridge, bears N. and S.; desc. 90 ft. over W. slope.
- 62.40 Spur, slopes nearly W.; desc. 15 ft. along N. slope.
- 80.48 The cor. of secs. 2, 3, 10 and 11.
- Land, rolling mountainous.
Soil, rocky loam.
Timber, dense pinon and juniper to N.; cleared to S.
Undergrowth, sagebrush and grass.
-
- N. 13° 57' E., bet. secs. 2 and 3.
- Over rolling mountain land through dense timber; desc. 100 ft. over N. slope.
- 15.10 Draw, drains W.; asc. 130 ft. over S. slope.
- 36.95 The cor. of secs. 2, 3, 34 and 35, on the N. bdy. of the Tp., monumented with an iron post, set, mkd. and witnessed as described in the 1966 field notes of T. 9 S., R. 7 W.
- Land, rolling mountain.
Soil, rocky loam.
Timber, dense pinon and juniper.
Undergrowth, sagebrush and grass.
- From the cor. of secs. 26, 27, 34 and 35.
- N. 85° 45' W., bet. secs. 27 and 34.
- Over rolling land through scattered timber.

Dependent Resurvey of a Portion of the Subdivision,
T. 10 S., R. 7 W.

CHAINS

- 0.15 Trail road, bears N. 20° W. and S. 20° E.
- 0.25 Fence, bears S., NE. and N. 87° 15' W.; thence along N. side of fence.
- 20.05 Fall 57 lks. N. of cor. of fence bearing S. 87° 15' E. and N. 2° 45' E.
- 33.60 Meadow Creek, dry, in a wash, 50 lks. wide, 10 ft. deep, drains S. 10° E.
- 40.79 The 1/4 sec. cor. of secs. 27 and 34, monumented with a sandstone, 15x10x8 ins., firmly set and plainly mkd. 1/4 on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

T10S R7W

½ — $\frac{S27}{S34}$

1967

Bury original stone cor. alongside iron post.

S. 84° 02' W., beginning new measurement.

Asc. 175 ft. over rolling E. slope. Enter dense timber.

- 20.65 Trail road, bears N. 60° E. and S. 60° W.
- 38.64 The cor. of secs. 27, 28, 33 and 34, monumented with an iron post, 2 ins. diam., set, properly mkd. as described in the official record of the 1932 survey.

Land, rolling.

Soil, clay loam.

Timber, dense pinon and juniper W. portion; scattered E. portion.

Undergrowth, sagebrush, grass and shadscale.

Reestablishment of the Surveys Executed by
A. J. Stewart Jr. in 1872 and Ralph Gentry
in 1932.

From the cor. of secs. 27, 28, 33 and 34.

N. 0° 18' E., bet. secs. 27 and 28.

Over rolling land through dense timber; desc. 15 ft. over N. slope.

Dependent Resurvey of a Portion of the Subdivision,
T. 10 S., R. 7 W.

CHAINS	
5.60	Base of descent; asc. 15 ft. over S. slope.
11.70	Low spur, slopes E.; desc. 10 ft. over NE. slope.
18.00	Draw, drains S. 55° E.; asc. 15 ft. over SW. slope.
19.00	Low spur, slopes S. 45° E.; desc. 25 ft. over NE. slope.
25.70	Small draw, drains E.; asc. 30 ft. over SE. slope.
36.00	Spur, slopes E.; desc. 25 ft. over NE. slope.
40.95	Draw, drains S. 80° E.
41.30	Point for the 1/4 sec. cor. of secs. 27 and 28 at proportionate bearing and dist.; there is no remaining evidence of the original cor. found in 1932.
	Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.
	T10S R7W
	S28 S27
	1967
	N. 0° 10' W., beginning new measurement.
	Asc. 15 ft. over S. slope.
2.75	Trail road, bears N. 55° W. and S. 55° E.
3.16	Fence, bears E. and W.
4.35	Spur, slopes E.; desc. 10 ft. along E. slope.
7.25	Base of descent; asc. 75 ft. over SW. slope.
29.20	Spur, slopes E.; desc. 40 ft. over NE. slope.
39.25	Meadow Creek, dry, drains S. 50° E.; asc. 10 ft. over SW. slope.
42.27	The cor. of secs. 21, 22, 27 and 28, monumented with an iron post, 2 ins. diam., set and properly mkd. as described in the official record of the 1932 survey.
	Land, rolling.
	Soil, loam.
	Timber, dense pinon and juniper.
	Undergrowth, sagebrush.

Dependent Resurvey of a Portion of the Subdivision,
T. 10 S., R. 7 W.

CHAINS

Reestablishment of the Survey Executed
by A. J. Stewart Jr. in 1872.

From the cor. of secs. 22, 23, 26 and 27.

N. 88° 25' W., bet. secs. 22 and 27.

Over rolling land through reseeded area.

- 19.60 Fence, bears N. and S.
38.65 Improved road, bears N. 22° W. and S. 22° E.
39.45 Fence, bears N. 22° W. and S. 22° E.
39.83 Point for the 1/4 sec. cor. of secs. 22 and 27 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T10S R7W

¼ — $\frac{S22}{S27}$

1967

Raise a mound of stone, 3 ft. base, 1½ ft. high, N. of cor.

Continue over gently rolling land.

- 42.70 Small stream of water, flows S. 20° E.
46.45 Fence, bears N. 75° E. and S. 75° W.
47.45 Fence, bears N. 24° W. and S. 24° E.
55.00 Fence, bears N. 10° W. and S. 10° E.
79.66 The cor. of secs. 21, 22, 27 and 28.

Land, gently rolling.

Soil, loam.

Timber, widely scattered patches of juniper.

Undergrowth, sagebrush, shadscale and grass.

From the cor. of secs. 14, 15, 22 and 23.

N. 88° 00' W., bet. secs. 15 and 22.

Over rolling land through dense timber; asc. 50 ft. over E. slope.

- 12.60 Spur, slopes S.; desc. 15 ft. over W. slope.
20.00 Draw, drains S.; asc. 30 ft. over E. slope.

Dependent Resurvey of a Portion of the Subdivision,
T. 10 S., R. 7 W.

CHAINS

- 24.10 Spur, slopes S., desc. 15 ft. over W. slope.
- 32.05 Draw, drains S., asc. 65 ft. over E. slope.
- 40.19 The 1/4 sec. cor. of secs. 15 and 22, monumented with a granite stone, 16x10x6 ins., firmly set and plainly mkd. 1/4 on N. face.
- At the cor. point
- Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
- T10S R7W
 $\frac{1}{4} \frac{S15}{S22}$
 1967
- Bury original stone cor. alongside iron post.
- Raise a mound of stone, 2½ ft. base, 1½ ft. high, N. of cor.
-
- S. 89° 33' W., beginning new measurement.
- Asc. 45 ft. over SE. slope.
- 7.50 Spur, slopes S., desc. 25 ft. over SW. slope.
- 15.20 Draw, drains S. 30° E., asc. 125 ft. over NE. slope.
- 22.25 Spur, slopes S. 20° E., desc. 65 ft. over W. slope.
- 25.15 Draw, drains S. 20° E., asc. 279 ft. over E. slope.
- 35.85 Ridge, bears N. 15° W. and S. 15° E., desc. 60 ft. over SW. slope.
- 40.08 The cor. of secs. 15, 16, 21 and 22, monumented with an iron post, 2 ins. diam., set and properly mkd. as described in the official record of the 1932 survey.
- Land, rolling.
 Soil, rocky loam.
 Timber, dense pinon and juniper.
 Undergrowth, sagebrush.
-
- From the cor. of secs. 10, 11, 14 and 15.
- N. 89° 53' W., bet. secs. 10 and 15.
- Over rolling mountain land through dense timber. Desc. 15 ft. over NW. slope.
- 5.55 Wash, 10 lks. wide, 1 ft. deep, drains N. 20° E., asc. 45 ft. over SE. slope.

Dependent Resurvey of a Portion of the Subdivision,
T. 10 S., R. 7 W.

CHAINS

- 13.90 Ridge, bears N. 20° E. and S. 20° W., desc. 120 ft. over NW. slope.
- 36.65 Small draw, drains N. 5° E., asc. 45 ft. over E. slope.
- 40.65 The 1/4 sec. cor. of secs. 10 and 15, monumented with a granite stone, 12x5x3 ins., firmly set and plainly mkd. 1/4 on N. face.
- At the cor. point
- Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
- T10S R7W
- ¼ $\frac{S10}{S15}$
- 1967
- Bury original stone cor. alongside iron post.
- Raise a mound of stone, 2½ ft. base, 1½ ft. high, N. of cor.
-
- S. 89° 51' W., beginning new measurement.
- Asc. 40 ft. over rolling E. slope.
- 3.15 Spur, slopes N., desc. 100 ft. over W. slope.
- 12.65 Draw, drains N. 45° W., asc. 80 ft. over E. slope.
- 20.15 Spur, slopes N., desc. 35 ft. over W. slope.
- 26.95 Draw, drains N., asc. 80 ft. over E. slope.
- 31.65 Spur, slopes N., desc. 40 ft. over W. slope.
- 40.15 The cor. of secs. 9, 10, 15 and 16, monumented with an iron post, 2 ins. diam., set, properly mkd. as described in the official record of the 1932 survey.
- Land, mountainous.
Soil, rocky loam.
Timber, dense pinon and juniper.
Undergrowth, sagebrush.
-
- N. 0° 08' E., bet. secs. 9 and 10.
- Over rolling mountain land through dense timber. Desc. 120 ft. over rolling N. slope.
- 39.79 Trail road, bears irregularly E. and W.
- 39.94 Fence, bears E. and W. Leave dense timber.

Dependent Resurvey of a Portion of the Subdivision,
T. 10 S., R. 7 W.

CHAINS

39.97 Point for the 1/4 sec. cor. of secs. 9 and 10 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

T10S R7W

½
S9|S10

1966

Desc. 110 ft. over rolling N. slope.

79.94 Point for the cor. of secs. 3, 4, 9 and 10 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T10S R7W

S4 S3
S9 S10

1966

Land, rolling mountain.
Soil, loam.
Timber, dense pinon and juniper.
Undergrowth, sagebrush and grass.

From the cor. of secs. 2, 3, 10 and 1.

S. 88° 40' W., bet. secs. 3 and 10.

Over rolling mountain land through sagebrush and grass undergrowth; desc. 180 ft. over SW. slope.

16.00 Erickson Pass Road, bears N. 40° W. and S. 40° E.

18.90 Government Creek, drains N. 30° W.; asc. 110 ft. over E. slope.

32.20 Spur, slopes N.; desc. 110 ft. over W. slope.

40.17 Point for the 1/4 sec. cor. of secs. 3 and 10 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd.

T10S R7W

½ S3
S10

1966

Dependent Resurvey of a Portion of the Subdivision,
T. 10 S., R. 7 W.

CHAINS

- Raise a mound of stone, $2\frac{1}{2}$ ft. base, 2 ft. high,
N. of cor.
- 40.30 Draw, drains N.; asc. 85 ft. over E. slope.
- 45.50 Spur, slopes N.; desc. 105 ft. over W. slope.
- 58.50 Wash, 10 lks. wide, 2 ft. deep, in draw, drains N.;
asc. 50 ft. over E. slope.
- 65.20 Spur, slopes N.; desc. 35 ft. over W. slope, changing
to N. slope.
- 80.34 The cor. of secs. 3, 4, 9 and 10.

Land, rolling mountain.
Soil, rocky loam.
Timber, widely scattered patches of juniper.
Undergrowth, sagebrush and grass.
-
- N. $13^{\circ} 23'$ E., bet. secs. 3 and 4.

Over rolling mountain land through scattered juniper
timber; desc. 60 ft. over rolling N. slope.
- 19.87 Fence, bears E. and W.
- 29.35 Wash, 30 lks. wide, 4 ft. deep, drains W.; asc. 25 ft.
over S. slope.
- 30.75 Trail road, bears E. and W.
- 36.73 Fence, bears N. 75° W. and S. 75° E.
- 39.03 The cor. of secs. 3, 4, 33 and 34, on the N. bdy. of
the Tp., monumented with an iron post, $2\frac{1}{2}$ ins. diam.,
set, mkd. and witnessed as described in the 1966 field
notes of T. 9 S., R. 7 W.

Land, rolling mountain.
Soil, loam.
Timber, scattered juniper.
Undergrowth, sagebrush and grass.
-
- From the cor. of secs. 8, 9, 16 and 17, monumented with
an iron post, 2 ins. diam., set, mkd. and witnessed as
described in the official record of the 1932 survey.
- N. $0^{\circ} 03'$ W., bet. secs. 8 and 9.

Over mountainous land through dense timber; asc. 15 ft.
over SE. slope.
- 7.80 Ridge, bears E. and W.; desc. 60 ft. over N. slope.
- 17.05 Head of draw, drains N. 10° W.; asc. 30 ft. over SW.
slope.

Dependent Resurvey of a Portion of the Subdivision,
T. 10 S., R. 7 W.

CHAINS

22.95 Point of spur, slopes W.; desc. 90 ft. over NW. slope.

35.30 Draw, drains N. 10° E.; asc. 5 ft. along E. slope.

39.97 Point for the 1/4 sec. cor. of secs. 8 and 9 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T10S R7W

½
S8|S9

1967

Raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor.

Asc. 15 ft. along E. slope.

42.00 Desc. 25 ft. over NW. slope.

50.20 Spring branch, 2 lks. wide, 6 ins. deep, flows N. 35° E.; asc. 15 ft. along E. slope.

57.41 Old abandoned fence, bears E. and W.

60.80 Trail road, bears N. 40° E. and S. 40° W., on spur; desc. 115 ft. over NW. slope.

79.30 Draw, drains N. 55° E.; asc. 10 ft. over SE. slope.

79.94 The cor. of secs. 4, 5, 8 and 9, monumented with a sandstone, 12x10x8 ins., firmly set and plainly mkd. 4 notches on E. and 5 on S. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

T10S R7W

S5|S4
S8|S9

1966

from which

A juniper, 8 ins. diam., bears N. 32° E., 13 lks. dist., mkd. T10S R7W S4 BT.

A juniper, 10 ins. diam., bears S. 58° E., 43 lks. dist., mkd. T10S R7W S9 BT.

A juniper, 8 ins. diam., bears N. 81° W., 32 lks. dist., mkd. T10S R7W S5 BT.

Bury original stone cor. alongside iron post.

Dependent Resurvey of a Portion of the Subdivision,
T. 10 S., R. 7 W.

CHAINS

Land, mountainous.
Soil, rocky loam.
Timber, dense pinon and juniper.
Undergrowth, sagebrush.

From the cor. of secs. 3, 4, 9 and 10.

S. 89° 36' W., bet. secs. 4 and 9.

Over rolling mountain land through scattered timber;
desc. 20 ft. along N. slope changing to NW. slope.

11.80 Wash, 40 lks. wide, 4 ft. deep, drains N. 20° E.; asc.
45 ft. over SE. slope.

19.75 Spur, slopes N.; desc. 45 ft. over W. slope.

37.75 Wash, 1.00 ch. wide, 8 ft. deep, drains N. 15° E.; asc.
15 ft. over E. slope.

40.07 Point for the 1/4 sec. cor. of secs. 4 and 9 at pro-
portionate dist.; there is no remaining evidence of
the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T10S R7W

½ $\frac{S4}{S9}$

1966

Raise a mound of stone, 3 ft. base, 1½ ft. high,
N. of cor.

43.25 Trail road, bears N. 10° E. and S. 10° W.

51.80 Spur, slopes N.; desc. 15 ft. over W. slope.

60.95 Wash, 40 lks. wide, 3 ft. deep, drains N. 15° E.; asc.
35 ft. over E. slope.

70.32 Fence, bears N. and S.

70.70 Trail road, bears N. and S., on spur; desc. 45 ft. over
NW. slope.

78.00 Wash, drains N. 60° E.; asc. 10 ft. over SE. slope.

80.14 The cor. of secs. 4, 5, 8 and 9.

Land, rolling mountain.
Soil, loam.
Timber, scattered pinon and juniper.
Undergrowth, sagebrush.

N. 13° 12' E., bet. secs. 4 and 5.

Dependent Resurvey of a Portion of the Subdivision,
T. 10 S., R. 7 W.

CHAINS	
	Over mountainous land through dense timber; asc. 50 ft. over SE. slope.
27.30	Spur, slopes E.; desc. 85 ft. over N. slope.
39.00	The cor. of secs. 4, 5, 32 and 33, on the N. bdy. of the Tp., monumented with an iron post, 2½ ins. diam., set, mkd. and witnessed as described in the 1966 field notes of T. 9 S., R. 7 W. Land, mountainous. Soil, rocky. Timber, dense pinon and juniper. Undergrowth, sagebrush.
	From the cor. of secs. 4, 5, 8 and 9. S. 89° 48' W., bet. secs. 5 and 8. Over mountainous land through dense timber; asc. 185 ft. over SE. slope.
40.45	Point for the 1/4 sec. cor. of secs. 5 and 8 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T10S R7W $\frac{1}{4} \frac{S5}{S8}$ 1966 from which A juniper, 4 ins. diam., bears S. 45° E., 1 lk. dist., mkd. 1/4 S BT Asc. 115 ft. over E. slope.
55.65	Trail road, on spur, bears irregularly N. and S.; desc. 15 ft. over NW. slope.
58.60	Draw, drains N. 20° E.; asc. 75 ft. over SE. slope.
64.00	Spur, slopes N. 35° E.; desc. 30 ft. over NW. slope.
68.50	Draw, drains N. 35° E.; asc. 125 ft. over NE. slope.
75.80	Top of ascent, slopes N.; desc. 20 ft. over NW. slope.
80.90	The cor. of secs. 5 and 8, monumented with an iron post, 2 ins. diam., set, mkd. and witnessed as described in the official record of the 1932 survey. Land, mountainous. Soil, rocky. Timber, dense pinon and juniper. Underbrush, sagebrush.

Dependent Resurvey of a Portion of the Subdivision,
T. 10 S., R. 7 W.

CHAINS

General Description

The area of the township covered by this survey is mostly rolling land that has been cleared of timber and reseeded. That portion not cleared is covered with medium to dense pinon and juniper timber. The north and northeastern portions are mountainous. The soil is mostly rocky loam in the north and east and sandy loam in the south. Undergrowth consists of grass, sagebrush and some shadscale. The area drains from the east and west to the central portion of the township; thence southerly. The elevation ranges from 6,000 ft. to 7,500 ft. above sea level. There is one ranch located in section 22. There is a spring located in the northwest portion of section 23 and one in the southwest portion of section 8. No other water was noted. There are several trail roads throughout the central and eastern portion of the township. One improved dirt road enters the township in the northwest portion of section 3, and bears southerly through the township leaving in section 35.

CERTIFICATE OF SURVEY

I, Glen B. Hatch, HEREBY CERTIFY upon honor that,
 in pursuance of special instructions bearing date of the 18th day of May, 1965,
 I have dependently resurveyed the E. bdy. and a portion of the subdivisional
 lines of Township 10 South, Range 7 West

of the Salt Lake Meridian, in the State of Utah, which
 are represented in the foregoing field notes as having been executed by me and under my direction;
 and that said survey has been made in strict conformity with said special instructions, the Manual
 of Instructions for the Survey of the Public Lands of the United States, and in specific manner
 described in the foregoing field notes.

May 29, 1967

(Date)

Glen B. Hatch

(Cadastral Surveyor)

SUPERVISORY

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

SUBMITTED FOR APPROVAL
 Date MAR 28 1968

BUREAU OF LAND MANAGEMENT,
 Washington, D. C.

The foregoing field notes of the dependent resurvey of the E. bdy. and a portion
 of the subdivisional lines of Township 10 South, Range 7 West, Salt Lake
 Meridian in the state of Utah

executed by Glen B. Hatch, Supervisory Cadastral Surveyor
 having been critically examined and found correct, are hereby approved.

AUG 2 1968

(Date)

R. E. Brown

(Chief, Division of Engineering)

CERTIFICATE OF TRANSCRIPT

~~I CERTIFY That the foregoing transcript of the field notes of the above described surveys in~~

, is a true copy of the original field notes.

(Date)

(Chief, Division of Engineering)

Blank

Page

Blank

Page

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
ORIGINAL

FIELD NOTES

OF THE DEPENDENT RESURVEY OF THE

SECOND STANDARD PARALLEL SOUTH

ALONG THE SOUTH BOUNDARY OF TOWNSHIP 10 SOUTH

THROUGH RANGE 6 WEST

AND OF THE

EAST AND A PORTION OF THE SOUTH BOUNDARY

AND

A PORTION OF THE SUBDIVISION OF

TOWNSHIP 11 SOUTH, RANGE 6 WEST

AND OF

THE INDEPENDENT RESURVEY

OF THE

LINES BETWEEN SECTIONS

3 AND 4, 4 AND 5, AND 5 AND 6

OF

TOWNSHIP 11 SOUTH, RANGE 6 WEST

Of the SALT LAKE Meridian,

In the State of UTAH

EXECUTED BY

GERALD W. HOCHSTRASSER SUPERVISORY CADASTRAL SURVEYOR

Under special instructions dated MAY 18, 19 65, which provided for the surveys
included under Group Number 470, approved MAY 20, 1965,
and assignment instructions dated MAY 21, 19 65.

Survey commenced JANUARY 5, 19 66

DEPARTMENT OF LANDS
SOUTH AFRICA

1933 SEP 24 11 10 00 .0

DEPARTMENT OF LANDS
SOUTH AFRICA

INDEX DIAGRAM

Township 11 SOUTH, Range 6 WEST,

8	7	6	5	3	2
64	60	52	41	31	20
63	62	59	51	40	30
62	58	50	39	29	19
58	57	56	49	38	28
18	17	55	49	37	27
65	55	48	36	26	18
19	20	54	47	36	25
		46	46	35	24
30	29	28	45	34	23
		44	43	33	23
31	22	22	43	32	22
		13	12	11	10

Dependent Resurvey of a Portion of T. 11 S., R. 6 W.

CHAINS

The south boundary of Township 10 S., R. 6 W. (Second Standard Parallel South) was surveyed in 1872 by J. Gorlinski, and in 1907 A. J. Stookey dependently resurveyed the east 2 miles. This same year Mr. Stookey retraced westerly along the west 4 miles of this boundary and found no trace of any original corners until reaching the township corner of Tps. 10 and 11 S., Rs. 6 and 7 W. He then independently re-established the standard sec. cors. and 1/4 sec. cors. at 40.00 and 80.00 chain intervals westerly on line between the found original standard sec. cor. of secs. 34 and 35, and the original township cor. of Tps. 10 and 11 S., Rs. 6 and 7 W. The south boundary of Township 11 South, Range 6 West, was surveyed by J. Gorlinski in 1872 and Miller and Hayes resurveyed 1½ miles and retraced 1 mile of the south boundary in 1915. The east boundary (First Guide Meridian West) was surveyed by J. Bausman in 1869. The north 4 miles of the west boundary were surveyed by J. Gorlinski in 1872 and resurveyed by Miller and Hayes in 1915; the south 2 miles of the west boundary were surveyed by Miller and Hayes in 1915. J. Gorlinski surveyed 31 sections in 1872 and Miller and Hayes completed the subdivisions, sections 19 and 29-32 inclusive, in 1915.

The following field notes are those of the dependent resurvey of the north boundary, the Second Standard Parallel South, the east boundary (First Guide Meridian West), a portion of the south boundary and a portion of the subdivisional lines, the remonumentation of the cor. of secs. 17, 18, 19 and 20 not remonumented in the 1915 resurvey of a portion of Township 11 South, Range 6 West, and of the independent resurvey of the lines between secs. 3 and 4, 4 and 5, and 5 and 6, in T. 11 S., R. 6 W.

The survey was initiated at the request of the District Manager, Bureau of Land Management, to relocate lost corners pertinent to the management of the lands. The cost of the field and office work incurred in the execution of the resurveys is payable from the current appropriations for "Management of Lands and Resources, Bureau of Land Management."

Before restoring the lost corners, the lines of the survey were retraced and a diligent search was made for any evidence of the original corners and other calls of the field note records. After completing the necessary retracements, the rules of proportionate measurement were applied in order to ascertain the position of the lost corners.

The directions of the lines were determined by an observation on Polaris and carried forward by sustained angulation.

The lengths of the lines were determined by chaining where the lines were accessible; inaccessible lines were run by traverse or triangulation methods. Distances to topography on lines run by traverse or triangulation are approximate as scaled from U.S.G.S. topographic maps and U. S. Forest Service Planimetric maps. The details of such traverses or triangulations have been thoroughly checked and verified and in order to simplify the record the diagrams and reductions are omitted from these field notes.

Dependent Resurvey of a Portion of T. 11 S., R. 6 W.

CHAINS

The geographic position of the southeast corner of the township is at Latitude $39^{\circ} 49' 00''$ N. and Longitude $112^{\circ} 27' 35''$ W., as scaled from U.S.G.S. topographic sheet Cherry Creek, Utah.

The magnetic declination was read at several stations throughout the township and the average of these readings was found to be $16^{\circ} 30'$ E.

Dependent Resurvey of the South Boundary, the Second Standard Parallel South, of Township 10 South, Range 6 West.

Reestablishment of the Survey Executed by Joseph Gorkinski in 1872, and Retraced by Alonzo J. Stookey in 1907.

Beginning at the cor. of Tps. 10 and 11 S., Rs. 5 and 6 W., which is a black sandstone $20 \times 14 \times 8$ ins., firmly set and plainly mkd. with 6 notches on the N., S., E. and W. edges and witnessed by a scattered mound of stone S. of cor.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 15 ins. in the ground to solid rock and in a mound of stone, 4 ft. base to brass cap mkd.

S C
T10S
R6W R5W
S36 | S31
S1 | S6
T11S
1966

Deposit the original stone alongside the cor.

S. $89^{\circ} 59'$ W., along the S. bdy. of sec. 36.

Over mountainous land through scattered juniper along old fence line; desc. 110 ft. over SW. slope.

10.20 Bottom of ravine, drains S. 45° W.; asc. 145 ft. over SE. slope.

22.20 Ridge, bears N. 45° E. and S. 45° W.; desc. 295 ft. over NW. slope.

40.21 The standard $1/4$ sec. cor. of sec. 36, monumented with a gray sandstone, $18 \times 6 \times 5$ ins., firmly set and plainly mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground and in a collar of stone to brass cap mkd.

Dependent Resurvey of the South Boundary, the Second Standard Parallel South, of Township 10 South, Range 6 West

CHAINS

S C
T10S R6W

1/4 S36

1966

Deposit the original stone alongside the cor.

N. 89° 57' W., beginning new measurement.

Over mountainous land through scattered juniper; desc. gradually.

Continue along old fence line.

- 1.10 Wash, 2 ft. deep, 20 lks. wide, drains S.
- 4.10 Trail road, bears N. and S.
- 5.10 Bottom of Otts Canyon, drains S.; asc. 265 ft. over E. slope; enter dense juniper, bears N. and S.
- 15.70 Ridge, bears N. and S.; leave juniper.
- Thence by triangulation.
- 25.00 Approx. dist. to bottom of ravine, drains S.
- 40.10 End of triangulation.

The standard cor. of secs. 35 and 36, monumented with a gray sandstone, 14x12x8 ins. (record 18x6x6 ins.), firmly set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone to brass cap mkd.

S C
T10S R6W

S35|S36

1966

Deposit the original stone alongside the corner.

Land, mountainous.

Soil, rocky.

Timber, scattered sagebrush.

S. 89° 59' W., along the S. bdy. of sec. 35.

Over mountainous land through scattered to dense juniper.

By triangulation.

- 1.10 Ridge, bears N. and S.; desc. approx. 200 ft. over SW. slope.
- 17.50 Bottom of Joes Canyon, drains S.; asc. approx. 200 ft. over SE. slope.
- 19.50 Trail road, bears N. and S.

Dependent Resurvey of the South Boundary, the Second
Standard Parallel South, of Township 10 South, Range 6 West

CHAINS

40.12 End of triangulation.

The standard 1/4 sec. cor. of sec. 35, monumented with a quartzite stone, 20x6x5 ins. (record 14x8x8 ins.), firmly set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground with brass cap mkd.

S C
T10S R6W
¼ S35
1966

Deposit the original stone alongside and raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.

West, beginning new measurement.

Over mountainous land through scattering to dense juniper; asc. 15 ft. over SE. slope, along old fence.

1.30 Ridge, bears N. and S.; desc. 65 ft. over SW. slope.

5.30 Draw, drains SW.; asc. 60 ft. over SE. slope.

12.30 Ridge, bears N. 60° E. and S. 60° W.; desc. 355 ft. over NW. slope.

40.26 Cor. of fence, bears N., S. and E.

The standard cor. of secs. 34 and 35, monumented with a sandstone 14x6x4 ins. (record 12x6x5 ins.), firmly set and mkd. as described in the official record.

from which the original bearing trees

A juniper, 10 ins. diam., bears N. 70° 40' E.,
62 lks. dist., mkd. T10S R6W S35 BT.

A juniper, 14 ins. diam., bears N. 56° 30' W.,
127 lks. dist., mkd. T10S R6W S34 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone, to brass cap mkd.

S C
T10S R6W
S34|S35
1966

Deposit the original stone alongside the corner.

Dependent Resurvey of the South Boundary, the Second
Standard Parallel South, of Township 10 South, Range 6 West

CHAINS	
	<p>Land, mountainous. Soil, rocky. Timber, scattered to dense juniper. Undergrowth, scattered sagebrush and shadscale.</p>
	<p>Reestablishment of a Survey Executed by Joseph Gorlinski in 1872 and Resurveyed by Alonzo J. Stookey in 1907</p>
	<p>S. 89° 52' W., along the S. bdy. of sec. 34.</p> <p>Over mountainous land through scattered to dense juniper and scattered undergrowth of sagebrush and shadscale; desc. gradually.</p>
3.20	Bottom of draw, drains S. 45° W.; asc. 110 ft. over SE. slope.
14.20	Ridge, bears N. 50° E. and S. 50° W.; desc. 130 ft. over SW. slope.
21.20	Bottom of ravine, drains S. 50° W.; asc. 80 ft. over SE. slope.
28.80	Ridge, bears N. 50° E. and W.; desc. 75 ft. along top of ridge.
40.21	Intersection of fence line, bears N., S. and N. 85° W.
	<p>The standard 1/4 sec. cor. of sec. 34, monumented with a sandstone 18x8x5 ins., firmly set and mkd. as des- cribed in the official record.</p> <p>The original bearing trees were destroyed during construction of fence lines.</p> <p>At the cor. point</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 16 ins. in the ground to solid rock and in a mound of stone, 3 ft. base to brass cap mkd.</p>
	<p style="text-align: center;">S C T10S R6W <u>½ S34</u> 1966</p>
	<p>Deposit the original stone alongside the cor.</p>
	<p>S. 89° 46' W., beginning new measurement.</p> <p>Over mountainous land through scattered juniper and shadscale; desc. 265 ft. over NW. slope.</p>
21.10	Fence, 4 strand, barbed wire, bears approx. N. 20° E. and S. 20° W.; bottom of steep descent, bears N. 20° E. and S. 20° W.; leave mountains; enter cultivated field.
32.10	Fence, 4 strand, barbed wire, bears N. and S.; leave cultivated field; enter broken and rolling desert land.
35.60	Dirt road, unimproved, bears NE. and SW., irregularly.

Dependent Resurvey of the South Boundary, the Second
Standard Parallel South, of Township 10 South, Range 6 West

CHAINS

- 39.10 Wash, 4 ft. deep, 20 lks. wide, drains S. 45° W.
40.14 The standard cor. of secs. 33 and 34, monumented with a sandstone, 24x10x8 ins., firmly set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone to brass cap mkd.

S C
T10S R6W
S33|S34

1966 .

Deposit the original stone alongside the cor.

Land, E. 60 chs. mountainous, W. 20 chs. rolling bench land.

Soil, rocky clay.

Timber, scattered to dense juniper.

Undergrowth, scattered sagebrush and shadscale.

S. 89° 50' W., along the S. bdy. of sec. 33.

Over rolling and broken desert bench land through scattered to dense juniper; asc. gradually.

- 15.20 Wash, 3 ft. deep, 20 lks. wide, drains S. 30° W.
19.20 Intersection of fence line, bears S., W. and approx. N. 85° E.; thence along fence line; dozed trail parallels fence line on S. side of fence.
33.20 Dirt road, unimproved, bears N. and S.
36.20 Hard to Beat Canyon, 15 ft. deep, 100 lks. wide, drains S. 10° W.
40.24 The standard 1/4 sec. cor. of sec. 33, monumented with a quartzite stone, 18x6x6 ins., firmly set and mkd. as described in the official record.

The original bearing trees were destroyed during construction of the fence line.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone to brass cap mkd.

S C
T10S R6W
¼ S33

1966

Deposit the original stone alongside the cor.

S. 89° 49' W., beginning new measurement.

Dependent Resurvey of the South Boundary, the Second Standard Parallel South, of Township 10 South, Range 6 West

CHAINS	
	<p>Over rolling desert bench land; continue along fence line and dozed trail with scattered juniper and sagebrush N. and S. of trail.</p>
4.70	Draw, 10 ft. deep, 150 lks. wide, drains S. 45° W.
20.20	Dirt road, improved, bears N. 20° E. and S. 20° W.
23.70	Wash, 4 ft. deep, 20 lks. wide, drains S. 45° W.
30.20	Wash in bottom of hollow, 5 ft. deep, 40 lks. wide, drains S. 45° W.
40.20	<p>The standard cor. of secs. 32 and 33, monumented with a quartzite stone, 12x6x4 ins. (record 15x8x6 ins.), firmly set, mkd. and witnessed as described in the official record.</p> <p>At the cor. point</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground with brass cap mkd.</p> <p style="text-align: center;">S C T10S R6W <u>S32 S33</u> 1966</p> <p>Deposit the original stone alongside and raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.</p> <p>Land, rolling and broken. Soil, rocky clay. Timber, scattered to dense juniper. Undergrowth, scattered sagebrush and shadscale.</p>
	<p>S. 89° 50' W., along the S. bdy. of sec. 32.</p> <p>Over rolling and broken desert bench land through scattered to dense juniper and scattered undergrowth of sagebrush and shadscale.</p> <p>Desc. gradually along 4 strand, barbed wire fence and dozed trail along S. side of fence.</p>
9.10	Wash, 2 ft. deep, 15 lks. wide, drains S. 20° W.
20.50	Small draw, drains S. 10° W.; asc. gradually over SE. slope.
24.10	Small draw, drains S. 10° W.
33.10	Low ridge, bears N. 20° E. and S. 20° W.; desc. 70 ft. over SW. slope.
40.08	<p>The standard 1/4 sec. cor. of secs. 32, monumented with a quartzite stone, 15x9x7 ins., firmly set, mkd. and witnessed as described in the official record.</p> <p>At the cor. point</p>

Dependent Resurvey of the South Boundary, the Second Standard Parallel South, of Township 10 South, Range 6 West

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground with brass cap mkd.

S C
T10S R6W
 $\frac{1}{2}$ S32

1966

Deposit the original stone alongside and raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.

S. $89^{\circ} 47'$ W., beginning new measurement.

Desc. gradually over SW. slope, continuing along fence line and dozed trail.

- 5.40 Draw, drains S.; asc. 50 ft. over SE. slope.
12.40 Low ridge, bears N. and S.; desc. 100 ft. SW. slope.
20.40 Draw, drains S.; asc. 60 ft. over SE. slope.
36.40 Low ridge, bears N. 10° E. and S. 10° W.; desc. 100 ft. over SW. slope.
40.36 The standard cor. of secs. 31 and 32, monumented with a quartzite stone, 18x7x7 ins., firmly set and plainly mkd. as described in the official record.

The original bearing trees were destroyed during construction of the fence line.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground and in a collar of stone to brass cap mkd.

S C
T10S R6W
S31|S32

1966

Deposit the original stone alongside the cor.

Land, rolling and broken.
Soil, sandy, rocky clay.
Timber, scattered to dense juniper.
Undergrowth, scattered sagebrush and shadscale.

S. $89^{\circ} 56'$ W., along S. bdy. of sec. 31.

Over rolling and broken desert bench land through scattered to dense juniper and scattered undergrowth of sagebrush and shadscale.

Asc. 60 ft. over SE. slope along fence line and dozed trail on S. side of fence.

Dependent Resurvey of the South Boundary, the Second
Standard Parallel South, of Township 10 South, Range 6 West

CHAINS

- 9.50 Low ridge, bears N. and S.; desc. gradually over broken SW. slope.
- 15.30 Small draw, drains S.
- 29.50 Dirt road, unimproved, bears N. and S.
- 39.30 Small draw, drains S. 15° W.
- 40.33 The standard 1/4 sec. cor. of sec. 31, monumented with a quartzite stone, 24x10x4 ins. (record 18x10x5 ins.), firmly set, mkd. and witnessed as described in the official record.
- At the cor. point
- Set an iron post, 30 ins. long, 2½ ins. diam., 28 ins. in the ground and in a mound of stone, 3 ft. base, 2 ft. high, to brass cap mkd.

S C
T10S R6W
¼ S31

1966

Deposit the original stone alongside the cor.

S. 89° 41' W., beginning new measurement.

Continue gradual descent over broken SW. slope along fence line and dozed trail.

- 27.80 South Pine Creek, drains S. 45° W.
- 35.80 Draw, drains S.; asc. gradually over gentle SE. slope.
- 41.80 Low ridge, bears N. and S.; desc. 10 ft. over gentle W. slope.
- 45.83 The standard cor. of Tps. 10 and 11 S., Rs. 6 and 7 W., monumented with a quartzite stone, 18x12x10 ins., firmly set and mkd. as described in the official record.
- There is no remaining evidence of the original bearing trees.
- At the cor. point
- Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground with brass cap mkd.

S C
T10S
R7W R6W
S36 | S31
S1 | S6

1966

Deposit the original stone alongside the cor.

Dependent Resurvey of the South Boundary, the Second
Standard Parallel South, of Township 10 South, Range 6 West

CHAINS

Land, rolling and broken.
Soil, rocky, sandy clay.
Timber, scattered to dense juniper.
Undergrowth, scattered sagebrush and shadscale.

Dependent Resurvey of a Portion of the South Boundary
of T. 11 S.; R. 6 W., Salt Lake Meridian, Utah

Reestablishment of the Survey Executed
by Joseph Gorlinski in 1872.

From the cor. of secs. 1, 6, 31 and 36, Tps. 11 and 12
S., Rs. 5 and 6 W., which is a gray sandstone, 18x11x7
ins., firmly set, mkd. and witnessed as described in the
official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins.
in the ground and in a collar of stone to brass cap mkd.

T11S
R6W R5W
S36 | S31
S1 | S6
T12S
1966

Deposit the original stone alongside the cor.

N. 89° 46' W., bet. secs. 1 and 36.

Over rolling and broken desert bench land through
scattered juniper and medium undergrowth of sagebrush
and shadscale.

- 17.30 Dirt road, improved, bears N. and S.
19.00 Wash, 2 ft. deep, 10 lks. wide, drains S.; asc. 90 ft.
over E. slope.
30.40 Ridge, bears N. and S.; desc. 105 ft. over W. slope.
40.13 The 1/4 sec. cor. of secs. 1 and 36, monumented with a
granite stone, 15x6x6 ins., firmly set, mkd. and wit-
nessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins.
in the ground and in a collar of stone to brass cap
mkd.

Dependent Resurvey of a Portion of the
South Boundary of T. 11 S., R. 6 W.

CHAINS

T11S R6W

$$\frac{S36}{S1}$$

T12S R6W

1966

Deposit the original stone alongside the cor.

N. 89° 59' W., beginning new measurement.

Desc. gradually over W. slope.

- 1.20 Wash, 3 ft. deep, 10 lks. wide, drains SW., irregularly;
asc. 75 ft. over broken E. slope.
- 8.20 Spur, projects S.; desc. 20 ft. over W. slope.
- 11.60 Draw, drains S.; asc. 25 ft. over E. slope.
- 15.40 Ridge, bears N. and S.; leave juniper; desc. 65 ft. over
broken NW. slope.
- 18.70 Small draw, drains SW., irregularly.
- 23.40 Small spur, projects S. 30° W.
- 28.60 Small draw, drains SW., irregularly.
- 32.90 Small spur, projects S. 10° W.; thence along S. slope.
- 40.18 The cor. of secs. 1, 2, 35 and 36, monumented with a
gray sandstone, 14x10x6 ins., firmly set, mkd. and
witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins.
in the ground with brass cap mkd.

T11S R6W

$$\frac{S35|S36}{S2|S1}$$

T12S R6W

1966

Deposit the original stone alongside and raise a
mound of stone, 3 ft. base, 2 ft. high, N. of cor.

Land, rolling and broken.

Soil, sandy, rocky clay.

Timber, scattered juniper.

Undergrowth, scattered to dense sagebrush and shadscale.

N. 89° 49' W., bet. secs. 2 and 35.

Over rolling and broken desert land through medium to
dense undergrowth of sagebrush and shadscale.

Asc. gradually.

Dependent Resurvey of a Portion of the
South Boundary of T. 11 S., R. 6 W.

CHAINS

- 2.20 Low ridge, bears N. 80° E. and S. 80° W.; desc. 100 ft. over NW. slope.
- 10.30 Base of descent, bears N. 80° E. and S. 80° W.; thence over nearly level desert land.
- 22.00 Dirt road, unimproved, bears N. and S.
- 40.18 The 1/4 sec. cor. of secs. 2 and 35, monumented with a limestone, 14x10x8 ins., firmly set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone to brass cap mkd.

T11S R6W

½ — S35
S2

T12S R6W

1966

Deposit the original stone alongside the cor.

N. 89° 52' W., beginning new measurement.

Continue over nearly level desert land.

- 22.40 Wash, 4 ft. deep, 5 lks. wide, drains S.
- 27.50 Wash, 3 ft. deep, 5 lks. wide, drains S.
- 40.38 Point for the cor. of secs. 2, 3, 34 and 35 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground and in a mound of stone, 3 ft. base to brass cap mkd.

T11S R6W

S34 | S35
S3 | S2

T12S R6W

1966

Land, nearly level.

Soil, sandy clay.

No timber.

Undergrowth, medium to dense sagebrush and shadscale.

N. 89° 52' W., bet. secs. 3 and 34.

Over nearly level desert land through medium undergrowth of sagebrush and shadscale.

- 30.00 Dirt road, improved, bears N. 30° W. and S. 30° E.

Dependent Resurvey of a Portion of the
South Boundary of T. 11 S., R. 6 W.

CHAINS	
35.20	Trail road, bears N. 30° E. and S. 30° W.
40.38	The 1/4 sec. cor. of secs. 3 and 34, monumented with a limestone, 12x11x4 ins. (record 14x8x8 ins.), firmly set, mkd. and witnessed as described in the official record.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone to brass cap mkd.
	T11S R6W
	$\frac{1}{2} \frac{S34}{S3}$
	T12S R6W
	1966
	Deposit the original stone alongside the cor.
	N. 89° 53' W., beginning new measurement.
	Continue over nearly level desert land.
3.80	Dirt road, improved, bears N. 20° E. and S. 20° W.
40.51.	The cor. of secs. 3, 4, 33 and 34, monumented with a quartzite stone, 12x8x4 ins. (record 14x8x8 ins.), firmly set, mkd. and witnessed as described in the official record.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone to brass cap mkd.
	T11S R6W
	$\frac{S33}{S4} \frac{S34}{S3}$
	T12S R6W
	1966
	Deposit the original stone alongside the cor.
	Land, nearly level. Soil, sandy clay. No timber. Undergrowth, medium sagebrush and shadscale.
	N. 89° 54' W., bet. secs. 4 and 33.
	Over nearly level desert land through medium undergrowth of sagebrush and shadscale.
1.60	Wash, 4 ft. deep, 20 lks. wide, drains S. 45° W.
24.10	Wash, 2 ft. deep, 15 lks. wide, drains S.
40.22	The 1/4 sec. cor. of secs. 4 and 33, monumented with a cobblestone, 13x13x4 ins., firmly set, mkd. and witnessed as described in the official record.

Dependent Resurvey of a Portion of the
South Boundary of T. 11 S., R. 6 W.

CHAINS

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins.
in the ground and in a collar of stone to brass cap mkd.

T11S R6W

$\frac{1}{2}$ $\frac{S33}{S4}$

T12S R6W

1966

Deposit the original stone alongside the cor.

S. $89^{\circ} 57'$ W., beginning new measurement.

Over nearly level desert land through medium undergrowth
of sagebrush and shadscale.

- 11.65 Wash, 1 ft. deep, 10 lks. wide, drains S.
20.70 Wash, 1 ft. deep, 10 lks. wide, drains S.
23.90 Trail road, bears N. and S.
40.26 The cor. of secs. 4, 5, 32 and 33, monumented with a
cobblestone, 10x4x4 ins. (record 14x8x8 ins.), set, mkd.
and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins.
in the ground with brass cap mkd.

T11S R6W

$\frac{S32}{S5}$ | $\frac{S33}{S4}$

T12S R6W

1966

Deposit the original stone alongside and raise a
mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Land, nearly level.
Soil, sandy clay.
No timber.
Undergrowth, medium sagebrush and shadscale.

Dependent Resurvey of the East Boundary of T. 11 S., R.
6 W. (First Guide Meridian West).

Reestablishment of the survey executed by J. Bausman in
1869.

From the cor. of Tps. 11 and 12 S., Rs. 5 and 6 W.,
previously described.

N. $0^{\circ} 16'$ E., bet. secs. 31 and 36.

Dependent Resurvey of a Portion of the
South Boundary of T. 11 S.; R. 6 W.

CHAINS

Over rolling desert land through scattered juniper and dense undergrowth of sagebrush; asc. 85 ft. over gentle SE. slope.

40.40

The 1/4 sec. cor. of secs. 31 and 36, monumented with a gray sandstone, 16x10x8 ins., firmly set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone to brass cap mkd.

T11S
R6W R5W
½
S36 | S31
1966

Deposit the original stone alongside the cor.

N. 0° 17' E., beginning new measurement.

Over rolling land through scattered to dense juniper and dense undergrowth of sagebrush; asc. 135 ft. over gentle S. slope.

24.70

Fence, 4 strand, barbed wire, bears approx. N. 60° W. and S. 60° E.

27.40

Wash, 1 ft. deep, 20 lks. wide, drains SW., irregularly.

30.70

Slope changes to SE.

40.41

The cor. of secs. 25, 30, 31 and 36, monumented with a gray sandstone, 18x12x6 ins. (record 23x13x4 ins.), firmly set and plainly mkd. with 1 notch on S. and 5 notches on N. edge.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground and in a collar of stone to brass cap mkd.

T11S
R6W R5W
S25 | S30
S36 | S31
1966

Deposit the original stone alongside the cor.

Land, rolling.

Soil, sandy clay.

Timber, scattered juniper.

Undergrowth, heavy sagebrush and shadscale.

N. 0° 21' E., bet. secs. 25 and 30.

Over rolling and broken land through dense juniper; asc. 145 ft. over broken SE. slope.

Dependent Resurvey of the East Boundary
of T. 11 S., R. 6 W.

CHAINS

- 6.30 Small spur, projects E.
10.20 Small draw, drains E.
13.20 Small spur, projects E.
18.90 Small draw, drains E.
23.00 Top of low ridge, bears N. 30° E. and S. 30° W.; desc.
35 ft. over NW. slope.
30.70 Draw, drains S. 30° W.; asc. 95 ft. over S. slope.
40.25 The 1/4 sec. cor. of secs. 25 and 30, monumented with
a flintstone, 20x15x4 ins., firmly set and plainly mkd.
"1/4" on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins.
in the ground and in a collar of stone to brass cap mkd.

T11S
R6W R5W
½
S25 | S30
1966

Deposit the original stone alongside the cor.; no
suitable bearing trees available.

N. 0° 42' E., beginning new measurement.

- .50 Ridge, bears N. 10° E. and S. 10° W.; thence along W.
slope.
2.60 Spur, projects NW.; desc. 90 ft. over NE. slope.
10.60 Draw, drains W.; asc. 55 ft. over SW. slope.
17.00 Spur, projects W.; desc. 95 ft. over NW. slope.
25.00 Leave timber, bears NW. and SE.; enter heavy sagebrush
undergrowth.
37.50 Wash, 5 ft. deep, 15 lks. wide, drains S. 45° W.; asc.
gradually.
38.80 Dirt road, unimproved, bears NE. and SW., irregularly.
39.31 The cor. of secs. 19, 24, 25 and 30, monumented with
a flintstone, 14x10x4 ins. (record, gray sandstone
18x7x5 ins.), firmly set and plainly mkd. with 2 notches
on S., and 4 notches on N. edge.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins.
in the ground and in a mound of stone 3 ft. base to
brass cap mkd.

Dependent Resurvey of the East Boundary of T. 11 S., R. 6 W.

CHAINS

T11S
R6W R5W
S24 | S19
S25 | S30
1966

Deposit the original stone alongside the cor.

Land, rolling and broken.

Soil, sandy, rocky clay.

Timber, scattered to dense juniper.

Undergrowth, medium to dense sagebrush and shadscale.

N. 0° 21' E., bet. secs. 19 and 24.

Over rolling and broken land through scattered to dense juniper and scattered undergrowth of sagebrush.

Desc. gradually.

- 3.90 Wash in Indian Hollow, 4 ft. deep, 15 lks. wide, drains SW., irregularly; asc. 240 ft. over SE. slope.
- 30.00 Ridge, bears N. 45° E. and S. 45° W.; desc. 80 ft. over NE. slope.
- 39.30 Draw, drains N. 10° W.
- 40.13 The 1/4 sec. cor. of secs. 19 and 24, monumented with a gray sandstone, 12x8x4 ins. (record 17x10x6 ins.), firmly set and plainly mkd. "1/4" on W. face.
- At the cor. point
- Set an iron post, 30 ins. long, 2½ ins. diam., 16 ins. in the ground to solid rock and in a mound of stone, 3 ft. base to brass cap mkd.
- T11S
R6W R5W
½
S24 | S19
1966
- Deposit the original stone alongside the cor.
-
- N. 0° 33' E., beginning new measurement.
- Over rolling and broken land through scattered to dense juniper and heavy undergrowth of sagebrush.
- Asc. 45 ft. over SW. slope.
- 6.50 Spur, projects W.; desc. 85 ft. over NW. slope.
- 12.00 Bottom of descent, bears NW. and SE.; thence over gently rolling land.

Dependent Resurvey of the East Boundary of T. 11 S., R. 6 W.

CHAINS

- 18.20 Fence, barbed wire, 4 strand, bears NE. and SW., irregularly.
- 20.10 Fence, barbed wire, 4 strand, bears W. and E., 30 lks. to intersection with fence bearing N. and S., irregularly.
- 37.40 Old wood fence, bears E. and W.
- 40.18 The cor. of secs. 13, 18, 19 and 24, monumented with a quartzite stone, 20x12x3 ins. (record flintstone 25x12x5 ins.), firmly set and plainly mkd. with 3 notches on the N. and S. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground and in a mound of stone, 2 ft. base to brass cap mkd.

T11S
R6W R5W
S13 | S18
S24 | S19
1966

Deposit the original stone alongside the cor.

Land, rolling and broken.
Soil, sandy, rocky clay.
Timber, scattered to dense juniper.
Undergrowth, heavy sagebrush.

N. 0° 26' E., bet. secs. 13 and 18.

Over rolling and broken land through medium undergrowth of sagebrush; desc. 20 ft. over N. slope.

- 2.20 Cow Hollow Creek, 3 ins. deep, 2 lks. wide, flows S. 80° W., irregularly; asc. 30 ft. over SE. slope.
- 4.90 Dirt road, bears E. and W.
- 11.90 Enter dense juniper, bears NE. and SW.; thence asc. 70 ft. over broken bench land.
- 20.30 Corner of fence bears W. 25 lks. dist.; fence bears N. irregularly and W. irregularly.
- 40.19 The ¼ sec. cor. of secs. 13 and 18, monumented with a flintstone, 12x8x6 ins. (record 16x10x8 ins.), firmly set and plainly mkd. "¼" on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone to brass cap mkd.

T11S
R6W R5W
S13 | S18
1966

Dependent Resurvey of the East Boundary of T. 11 S., R. 6 W.

CHAINS

Deposit the original stone alongside the cor.

N. 0° 33' E., beginning new measurement.

Asc. 120 ft. over gentle S. slope through scattered to dense juniper and heavy undergrowth of sagebrush.

.80 Dirt road, improved, bears N. 40° W. and S. 40° E.

40.28 The cor. of secs. 7, 12, 13 and 18, monumented with a sandstone, 14x8x6 ins. (record 23x10x4 ins.), firmly set and plainly mkd. with 4 notches on S. and 2 notches on N. edge.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground with brass cap mkd.

T11S
R6W R5W
S12|S7
S13|S18

1966

from which

A juniper, 6" diam., bears N. 38° E., 23 lks. dist., mkd. T. 11 S., R. 5 W., S7 BT.

A juniper, 6" diam., bears S. 17° 30' W., 21 lks. dist., mkd. T. 11S R. 6 W., S13 BT.

There were no other suitable bearing trees available.

Deposit the original stone alongside and raise a mound of stone 3 ft. base, 2 ft. high, W. of cor.

Land, rolling.

Soil, sandy clay.

Timber, scattered to dense juniper.

Undergrowth, heavy sagebrush.

N. 1° 39' E., bet. secs. 7 and 12.

Over rolling bench land through scattered to dense juniper and heavy undergrowth of sagebrush; asc. gradually over S. slope.

1.50 Dirt road, improved, bears E. and W. 1.25 chs., thence SW. irregularly.

24.00 Wash 5 ft. deep, 20 lks. wide, drains SW., irregularly; asc. 100 ft. over SE. slope.

40.43 True point for the 1/4 sec. cor. of secs. 7 and 12 as determined from the original bearing trees.

Dependent Resurvey of the East Boundary of T. 11 S., R. 6 W.

CHAINS

A juniper, 12 ins. diam., bears S. 39° W., 70 lks. dist., mkd. 1/4 S BT.

A juniper, 16 ins. diam., bears N. 28° 30' W., 106 lks. dist., mkd. 1/4 S BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground to solid rock and in a mound of stone; 3 ft. base to brass cap mkd.

T11S
R6W R5W
½
S12|S7
1966

The cor. is located on the E. edge of a dozed trail used in the construction of a fence line.

N. 0° 41' E., beginning new measurement.

Asc. 85 ft. over SE. slope along E. side of fence.

20.00 Spur, projects E.; thence along E. slope.

25.00 Spur, projects N. 20° E.; desc. 25 ft. over NW. slope.

39.83 The cor. of secs. 1, 6, 7 and 12, monumented with a sandstone, 16x8x8 ins. (record 20x14x12), firmly set and plainly mkd. with 5 notches S. and 1 notch on N. edge.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone to brass cap mkd.

T11S
R6W R5W
S1|S6
S12|S7
1966

Deposit the original stone alongside the cor.

The cor. is at a fence cor. with barbed wire fences bearing E., W. and S., irregularly.

Land, rolling.

Soil, sandy, rocky clay.

Timber, scattered to dense juniper.

Undergrowth, heavy sagebrush.

N. 0° 38' E., bet. secs. 1 and 6.

Dependent Resurvey of the East Boundary of T. 11 S., R. 6 W.

CHAINS

- Over mountainous land through scattered juniper and heavy undergrowth of sagebrush; asc. 20 ft. along E. side of draw.
- 2.80 Old fence line, barbed wire, bears N. and S. 45° E.; thence along old fence line.
- 9.50 Wash in Pole Canyon, 10 ft. deep, 40 lks. wide, drains S. 10° W.; enter dense juniper, bears N. 10° E. and S. 10° W.; asc. 20 ft. along W. side of draw.
- 14.40 Begin ascent over SE. slope, bears N. 10° E. and S. 10° W.; asc. 180 ft.
- 40.86 The 1/4 sec. cor. of secs. 1 and 6, monumented with a sandstone, 12x8x4 ins. (record 20x8x6 ins.), firmly set and plainly mkd. "1/4" on W. face.
- At the cor. point
- Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone to brass cap mkd.
- T11S
R6W R5W
½
S1|S6
1966
- Deposit the original stone alongside the cor.
-
- N. 0° 31' E., beginning new measurement.
- Asc. 295 ft. over broken SE. slope through scattered to dense juniper.
- 29.50 Ridge, bears N. 20° E. and S. 20° W.; desc. 80 ft. over NW. slope.
- 39.00 Draw, drains S. 45° W.; asc. 20 ft. over S. slope.
- 40.67 The cor. of Tps. 10 and 11 S., Rs. 5 and 6 W., previously described.
- Land, mountainous.
Soil, sandy, rocky clay.
Timber, scattered to dense juniper.
Undergrowth, scattered to heavy sagebrush.

Dependent Resurvey of a Portion of the
Subdivisional Lines of T. 11 S., R. 6 W.

Reestablishment of the Survey
Executed by J. Gorlinski in 1872.

Dependent Resurvey of a Portion of the
Subdivisional Lines of T. 11 S., R. 6 W.

CHAINS

- From the cor. of secs. 1, 2, 35 and 36 on the S. bdy. of the tp., previously described.
- N. 0° 16' E., bet. secs. 35 and 36.
- Over rolling and broken desert land through scattered to dense undergrowth of sagebrush and shadscale; asc. 10 ft. over S. slope.
- 1.00 Spur, projects W.; desc. 20 ft. over N. slope.
- 5.00 Draw, drains W.; asc. 10 ft. over SE. slope.
- 9.00 Spur, projects W.; desc. 10 ft. over NW. slope.
- 12.00 Draw, drains SW., irregularly; asc. 20 ft. over SE. slope.
- 15.30 Spur, projects S. 45° W.; desc. 25 ft. over NW. slope.
- 23.30 Draw, drains S. 45° W.; asc. 95 ft. over SE. slope.
- 35.60 Ridge, bears S. 45° W. and S. 80° E.; desc. 50 ft. over N. slope.
- 40.29 The 1/4 sec. cor. of secs. 35 and 36, monumented with a cobblestone, 18x14x10 ins. (record 16x8x7 ins.), firmly set and dimly mkd. "1/4" on W. face.
- At the cor. point
- Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone to brass cap mkd.
- T11S R6W
S35 | S36
1966
- Deposit the original stone alongside the cor.
-
- N. 0° 01' W., beginning new measurement.
- Continue over rolling and broken desert land.
- Desc. 10 ft. over N. slope.
- 2.00 Draw, drains S. 80° W.; asc. 45 ft. over S. slope.
- 9.00 Low ridge, bears E. and W.; desc. 35 ft. over N. slope.
- 13.00 Draw, drains S. 80° W.; thence over gently rolling and broken land.
- 35.70 Wash, 2 ft. deep, 20 lks. wide, drains S. 60° W.
- 40.43 Point for the cor. of secs. 25, 26, 35 and 36 at proportionate dist.; there is no remaining evidence of the original cor.
- Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone to brass cap mkd.

Dependent Resurvey of T. 11 S., R. 6 W.

CHAINS

T11S R6W

S26	S25
S35	S36

1966

Land, rolling and broken.
Soil, sandy, rocky clay.
No timber.
Undergrowth, scattered to heavy sagebrush and shadscale.

From the cor. of secs. 25, 30, 31 and 36 on the E. bdy.
of the tp., previously described.

West, bet. secs. 25 and 36.

Over rolling and broken land through scattered to dense
juniper; asc. 10 ft. over SE. slope.

- 1.70 Spur, projects S.; desc. 20 ft. over SW. slope.
- 5.50 Fence, barbed wire, 4 strand, bears N. and S.; thence
along gentle S. slope.
- 25.00 Dirt road, improved, bears N. and S.
- 40.29 Point for the 1/4 sec. cor. of secs. 25 and 36 at pro-
portionate dist.; there is no remaining evidence of the
original cor.
- Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins.
in the ground and in a collar of stone to brass cap mkd.
- T11S R6W
- | | |
|---|-----|
| ¼ | S25 |
| | S36 |
- 1966
- Continue over rolling desert land.
- 41.80 Wash, 2 ft. deep, drains SW., irregularly; asc. 30 ft.
over NE. slope.
- 52.50 Spur, projects N.; desc. 70 ft. over broken NW. slope.
- 58.90 Wash, 2 ft. deep, 10 lks. wide, drains S. 45° W.; leave
timber.
- 72.00 Wash, 2 ft. deep, 10 lks. wide, drains S. 45° W.
- 80.58 The cor. of secs. 25, 26, 35 and 36, previously described
- Land, rolling and broken.
Soil, sandy, rocky clay.
Timber, scattered to dense juniper.
Undergrowth, scattered to heavy sagebrush and shadscale.

N. 0° 10' E., bet. secs. 25 and 26.

Over rolling and broken desert land through scattered
juniper and sagebrush.

Dependent Resurvey of T. 11 S., R. 6 W.

CHAINS

18.40 Wash, 3 ft. deep, 20 lks. wide, drains S. 45° W.

40.43 Point for the 1/4 sec. cor. of secs. 25 and 26 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone to brass cap mkd.

T11S R6W

 ½
S26 | S25

1966

Continue over broken and rolling desert land; asc. 155 ft. over SE. slope.

52.10 Trail road, bears N. 45° E. and S. 45° W.

79.10 Trail road, bears N. 45° E. and S. 45° W., along top of ridge; desc. gradually along NW. slope.

80.86 Point for the cor. of secs. 23, 24, 25 and 26 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone to brass cap mkd.

T11S R6W

S23 | S24
S26 | S25

1966

Land, rolling and broken.

Soil, sandy, rocky clay.

Timber, scattered juniper.

Undergrowth, scattered to dense sagebrush and shadscale.

From the cor. of secs. 19, 24, 25 and 30 on the E. bdy. of the tp., previously described.

N. 89° 05' W., bet. secs. 24 and 25.

Over mountainous land through dense juniper and pinon.

Desc. gradually over NW. slope.

2.31 Wash in Indian Hollow, 2 ft. deep, 20 lks. wide, drains SW., irregularly; asc. 85 ft. over SE. slope.

4.59 Fence, barbed wire, bears N. 35° E. and S. 35° W.

17.90 Spur, projects S. 30° W.; desc. 50 ft. over NW. slope.

31.25 Draw, drains S. 30° W.; asc. 30 ft. over SE. slope.

34.85 Spur, projects S. 45° W.; desc. 90 ft. over W. slope.

40.54 Point for the 1/4 sec. cor. of secs. 24 and 25 at proportionate dist.; there is no remaining evidence of the original cor.

Dependent Resurvey of T. 11 S., R. 6 W.

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground and in a collar of stone to brass cap mkd.

T11S R6W

$\frac{1}{4}$ $\frac{S24}{S25}$

1966

Continue over mountainous land through scattered to dense juniper and pinon; desc. 15 ft. over W. slope.

- 44.60 Dirt road, improved, bears N. and S., along bottom of draw, drains S.; asc. 95 ft. over SE. slope.
- 55.30 Spur, projects S. 45° W.; desc. 75 ft. over NW. slope.
- 64.90 Draw, drains S. 45° W.; asc. 50 ft. over SE. slope.
- 75.90 Spur, projects S. 45° W.; desc. 20 ft. over NW. slope.
- 81.08 The cor. of secs. 23, 24, 25 and 26, previously described.

Land, mountainous.

Soil, sandy, rocky clay.

Timber, scattered to dense juniper and pinon.

Undergrowth, scattered to heavy sagebrush and shadscale.

N. $0^\circ 51'$ E., bet. secs. 23 and 24.

Over rolling and broken land through medium to dense juniper; desc. 55 ft. over NW. slope.

- 14.60 Draw, drains W.; asc. 35 ft. over SW. slope.
- 17.85 Fence, net wire, bears N. 45° E. and S. 45° W.
- 25.60 Low ridge, bears E. and W.; desc. 50 ft. over gentle N. slope.
- 35.15 Fence, net wire, bears N. 50° E. and S. 50° W.; enter deserted ranch yard.
- 37.20 Old tool shed bears W., 20 lks. dist.; deserted ranch house bears E., 2.80 chs. dist.
- 38.00 Dirt road, unimproved, bears S. 50° W. and N. 50° E.
- 40.00 Cow Hollow, drains S. 50° W.
- 40.43 Point for the $\frac{1}{4}$ sec. cor. of secs. 23 and 24 at proportionate dist.; there is no remaining evidence of the original cor.
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground with brass cap mkd.

T11S R6W

$\frac{1}{4}$ S23 | S24

1966

Set a steel fence post alongside the cor.

Thence over grassy bottom land.

- 41.27 Fence, net wire, bears N. 60° E. and S. 60° W.

Dependent Resurvey of T. 11 S., R. 6 W.

CHAINS

- 47.00 Wash, drains S. 60° W.
- 48.00 Leave bottom land, bears N. 60° E. and S. 60° W.; enter rolling land; asc. 155 ft. over SE. slope through dense juniper.
- 59.65 Fence, net wire, bears E. and SW.
- 74.40 Ridge, bears N. 60° E. and S. 60° W.; desc. 35 ft. over NW. slope.
- 80.86 Point for the cor. of secs. 13, 14, 23 and 24 at proportionate dist.; there is no remaining evidence of the original cor.
- Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground and in a mound of stone 3 ft. base to brass cap mkd.

T11S R6W

S14	S13
S23	S24

1966

Land, rolling and broken.
 Soil, sandy, rocky clay.
 Timber, scattered to dense juniper.
 Undergrowth, scattered to heavy sagebrush and shadscale.

From the cor. of secs. 13, 18, 19 and 24 on the E. bdy. of the tp., previously described.

N. 89° 43' W., bet. secs. 13 and 24.

Over rolling and broken land; desc. 35 ft. along N. slope.

- 2.00 Slope changes to NW.
- 3.20 Wash in Cow Hollow, 2 ft. deep, 10 lks. wide, drains S. 60° W.; asc. gradually over gently rolling E. slope; enter scattered to dense juniper, bears N. and S.
- 7.50 Dirt road, unimproved, bears N. and S.
- 19.50 Old wood fence, bears NE. and SW.
- 20.20 Fence, barbed wire, 4 strand, bears S. and N., approx. 2.00 chs. to intersection with fence bearing W. and N. 80° E.; thence along S. side of fence.
- 28.50 Ridge, bears N. and S.; desc. 65 ft. over W. slope.
- 40.24 The 1/4 sec. cor. of secs. 13 and 24, monumented with a granite stone, 16x8x6 ins., firmly set and dimly mkd. "1/4" on W. face; the monument is at the corner of a fence bearing S. and E.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground and in a collar of stone to brass cap mkd.

Dependent Resurvey of T. 11 S., R. 6 W.

CHAINS

T11S R6W

 $\frac{1}{4}$ $\frac{S13}{S24}$

1966

Deposit the original stone alongside the cor.

N. 88° 00' W., beginning new measurement.

Over rolling and broken land.

- .20 Bottom of draw, drains S.; asc. 25 ft. over E. slope.
- 3.50 Low ridge, bears N. and S.; desc. 60 ft. over W. slope.
- 10.00 Fence, barbed wire, 4 strand, bears NW. and SE., irregularly.
- 11.40 Dirt road, unimproved, bears N. and S.
- 15.30 Draw, drains S.; asc. 110 ft. over broken SE. slope.
- 16.20 Fence, barbed wire, bears N. and S.
- 16.50 Wash, 3 ft. deep, 15 lks. wide, drains S.
- 34.50 Ridge, bears N. and S.; desc. 45 ft. over NW. slope.
- 40.21 The cor. of secs. 13, 14, 23 and 24, previously described.
- Land, rolling and broken.
Soil, sandy, rocky clay.
Timber, scattered to dense juniper and pinon.
Undergrowth, scattered to heavy sagebrush and shadscale.

N. 0° 02' W., bet. secs. 13 and 14.

Over rolling and broken land through scattered to dense juniper and pinon; desc. 30 ft. over NW. slope.

- 5.80 Draw, drains S. 20° W.; asc. 120 ft. over broken SE. slope.
- 6.30 Dirt road, unimproved, bears E. and W.
- 30.30 Ridge, bears E. and W.; desc. gradually along broken NW. slope.
- 37.00 Draw drains SW.; asc. 15 ft. over SE. slope.
- 40.43 Point for the 1/4 sec. cor. of secs. 13 and 14 at proportionate dist.; there is no remaining evidence of the original cor.
- Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground to solid rock and in a mound of stone, 3 ft. base to brass cap mkd.

Dependent Resurvey of T. 11 S., R. 6 W.

CHAINS

T11S R6W

 $\frac{1}{2}$
 S14|S13

1966

Continue over rolling and broken land; asc. 155 ft. over SE. slope.

- 52.30 Ridge, bears E. and W.; desc. 75 ft. over NW. slope.
 64.10 Draw, drains S. 45° W.; asc. 80 ft. over S. slope.
 65.60 Dirt road, unimproved, bears E. and W.
 66 30 Fence, barbed wire, 4 strand, bears E. and W.
 80.86 Point for the cor. of secs. 11, 12, 13 and 14 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground with brass cap mkd.

T11S R6W

 $\frac{S11|S12}{S14|S13}$

1966

Raise a mound of stone 3 ft. base, 2 ft. high, W. of cor.

Land, rolling and broken.
 Soil, sandy, rocky clay.
 Timber, scattered to dense juniper and pinon.
 Undergrowth, scattered to heavy sagebrush and shadscale.

From the cor. of secs. 7, 12, 13 and 18 on the E. bdy. of the tp., previously described.

N. 88° 33' W., bet. secs. 12 and 13.

Over rolling, mountainous land through dense juniper and heavy sagebrush undergrowth; desc. over gentle W. slope.

- 1.25 Fence, barbed wire, bears nearly N. and S.
 2.50 Road, unimproved, bears N. 35° E. and S. 35° W.
 7.93 Stream, 1 lk. wide, 2 ins. deep, flows S.
 24.40 Ridge, bears N. 15° E. and S. 15° W.; desc. 55 ft. over W. slope.
 30.70 Draw, drains S. 20° W.; asc. 80 ft. over E. slope.
 37.10 Spur, projects S. 20° W.; desc. 30 ft. over W. slope.
 40.60 Point for the 1/4 sec. cor. of secs. 12 and 13 at proportionate dist.; there is no remaining evidence of the original cor.

Dependent Resurvey of T. 11 S., R. 6 W.

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground and in a mound of stone, 3 ft. base to brass cap mkd.

T11S R6W

¼ $\frac{S12}{S13}$

1966

Continue over mountainous land; desc. 30 ft. over W. slope.

- 44.80 Draw, drains S. 20° W.; asc. 90 ft. over E. slope.
- 50.50 Ridge, bears N. 30° E. and S. 30° W.; thence by triangulation; desc. 120 ft.
- 57.70 Trail road, bears N. 45° E. and S. 55° W.
- 59.70 Fence, barbed wire, bears N. 55° E. and S. 55° W.
- 60.20 Wash in Pole Canyon, 6 ft. deep, 30 lks. wide, drains S. 60° W. 60° W.
- 81.20 End of triangulation.

The cor. of secs. 11, 12, 13 and 14, previously described.

Land, mountainous.

Soil, sandy, rocky clay.

Timber, scattered to dense juniper and pinon.

Undergrowth, scattered to heavy sagebrush and shadscale.

N. 0° 20' W., bet. secs. 11 and 12.

Over mountainous land through scattered to dense juniper and pinon; asc. 130 ft. over S. slope.

- 14.50 Ridge, bears N. 60° E. and S. 60° W.; desc. gradually over NW. slope.
- 23.00 Draw, drains S. 20° W.; asc. 25 ft. over SE. slope.
- 25.80 Ridge, bears N. 45° E. and S. 45° W.; desc. 125 ft. over broken NW. slope.
- 34.50 Draw, drains S. 45° W.
- 36.00 Spur, projects S. 45° W.
- 38.50 Draw, drains S. 45° W.; asc. 10 ft. over SE. slope.
- 40.38 Fence, barbed wire, bears S. and W.
- 40.43 Point for the 1/4 sec. cor. of secs. 11 and 12 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground and in a mound of stone, 3 ft. base to brass cap mkd.

Dependent Resurvey of T. 11 S., R. 6 W.

CHAINS

T11S R6W

 $\frac{1}{4}$

S11 | S12

1966

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Continue over mountainous land; asc. 100 ft. over broken SE. slope.

- 42.50 Leave timber, bears NE. and SW.
- 63.00 Draw, in bottom of Ott's Canyon, drains S. 20° W.
- 69.80 Dirt road, unimproved, bears N. 20° E. and S. 20° W.
- 70.00 Enter dense juniper, bears NE. and SW.
- 79.83 Fence, barbed wire, 4 strand, bears E. and W.
- 80.86 The cor. of secs. 1, 2, 11 and 12, monumented with a gray sandstone, 15x12x6 ins., firmly set and plainly mkd. with 5 notches on the S. and 1 notch on the E. edge.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground with brass cap mkd.

T11S R6W

S2 | S1

S11 | S12

1966

Deposit the original stone alongside and raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Land, mountainous.

Soil, sandy, rocky clay.

Timber, scattered to dense juniper and pinon.

Undergrowth, scattered to heavy sagebrush and shadscale.

From the cor. of secs. 1, 6, 7 and 12 on the E. bdy. of the tp., previously described.

N. 88° 15' W., bet. secs. 1 and 12.

Over mountainous land; desc. gradually over W. slope through scattered juniper and heavy undergrowth of sagebrush.

- .95 Wash, 4 ft. deep, 40 lks. wide with stream of water, 6 ins. deep, 5 lks. wide, flows S.; asc. 120 ft. over E. slope.
- 4.15 Trail road, bears N. 20° E. and S.; enter dense juniper, bears N. and S.
- 28.70 Ridge, bears N. and S.; desc. 100 ft. over W. slope.
- 41.74 Point for the 1/4 sec. cor. of secs. 1 and 12 at proportionate dist.; there is no remaining evidence of the original cor.
- Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground to solid rock and in a mound of stone, 4

Dependent Resurvey of T. 11 S., R. 6 W.

CHAINS

base to brass cap mkd.

T11S R6W

$$\frac{1}{2} \frac{S1}{S12}$$

1966

Continue over mountainous land; asc. 80 ft. over E. slope.

46.50 Spur, projects S.; desc. 85 ft. over W. slope.

53.40 Draw, drains S.; asc. 75 ft. over E. slope.

59.00 Ridge, bears N. 10° E. and S. 10° W.; desc. 360 ft. over W. slope.

62.15 Fence, barbed wire, bears N. and S.

72.50 Leave timber, bears N. and S.; thence over bottom of wide draw in Ott's Canyon.

74.20 Stream, 1 in. deep, 10 lks. wide, flows S. 10° W.; asc. 50 ft. over E. slope.

79.80 Dirt road, unimproved, bears N. 15° E. and S. 15° W.

79.90 Enter juniper, bears N. and S.

80.58 Fence, barbed wire, bears N. and S.

83.48 The cor. of secs. 1, 2, 11 and 12, previously described.

Land, mountainous.

Soil, sandy, rocky clay.

Timber, scattered to dense juniper and pinon.

Undergrowth, scattered to heavy sagebrush and shadscale.

N. 3° 59' E., bet. secs. 1 and 2.

Over mountainous land through scattered to dense juniper and pinon; asc. 190 ft. over SE. slope.

21.00 Spur, projects NE.; desc. 25 ft. over N. slope.

26.00 Draw, drains E.; asc. 75 ft. over SE. slope.

35.60 Slope changes to E.; asc. 20 ft.

39.36 Point for the 1/4 sec. cor. of secs. 1 and 2 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground and in a mound of stone, 3 ft. base to brass cap mkd.

T11S R6W

$$\frac{1}{2} S2|S1$$

1966

Dependent Resurvey of T. 11 S., R. 6 W.

CHAINS

Continue along E. slope through medium juniper and pinon; asc. 185 ft.

79.33

Point for the closing cor. of secs. 1 and 2 on the N. bdy. of the tp., the Second Standard Parallel South, at record distance from the standard corner of secs. 35 and 36, T. 10 S., R. 6 W.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground and in a collar of stone to brass cap mkd.

T10S R6W

S36
—
S2 S1
C C

T11S R6W

1966

From this cor., the standard cor. of secs. 35 and 36, T. 10 S., R. 6 W., bears N. $89^{\circ} 57' W.$, 1.60 chs. dist., previously described.

The position for the $1/4$ sec. cor. of sec. 1 on the N. bdy. of the sec., is at midpoint bet. the closing cor. of secs. 1 and 2 and the standard tp. cor. of Tps. 10 and 11 S., Rs. 5 and 6 W., and on the Second Standard Parallel South.

At this point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 22 ins. in the ground and in a collar of stone to brass cap mkd.

$\frac{1}{4}$ S1
T11S R6W

1966

From this cor., the standard $1/4$ sec. cor. of sec. 36, T. 10 S., R. 6 W., bears S. $89^{\circ} 59' W.$, 86 lks. dist., and is monumented with an iron post, $2\frac{1}{2}$ ins. diam., previously described.

Land, mountainous.

Soil, sandy, rocky clay.

Timber, scattered to dense juniper and pinon.

Undergrowth, scattered to heavy sagebrush and shadscale.

From the cor. of secs. 2, 3, 34 and 35 on the S. bdy. of the tp., previously described.

N. $0^{\circ} 14' E.$, bet. secs. 34 and 35.

Over gently rolling desert land through heavy undergrowth of shadscale; asc. gradually.

28.40

Wash, 3 ft. deep, 20 lks. wide, drains S. $30^{\circ} W.$

40.29

Point for the $1/4$ sec. cor. of secs. 34 and 35 at proportionate dist.; there is no remaining evidence of the original cor.

Dependent Resurvey of T. 11 S., R. 6 W.

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground and in a collar of stone to brass cap mkd.

T11S. R6W

$\frac{1}{2}$
S34 | S35

1966

Continue over gently rolling land; asc. gradually.

48.50 Wash, 1 ft. deep, 5 lks. wide, drains S. 30° W.

79.65 Dirt road, improved, bears E. and W., 1.00 ch.; thence S. 30° W.

80.58 Point for the cor. of secs. 26, 27, 34 and 35 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground with brass cap mkd.

T11S R6W

S27 | S26
S34 | S35

1966

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Land, gently rolling.

Soil, sandy clay.

No timber.

Undergrowth, heavy shadscale.

From the cor. of secs. 25, 26, 35 and 36, previously described.

N. $89^\circ 54'$ W., bet. secs. 26 and 35.

Over gently rolling desert land through heavy undergrowth of sagebrush and shadscale; desc. gradually.

16.80 Wash, 2 ft. deep, 10 lks. wide, drains S. 20° W.

31.00 Dozed road, bears N. and S.

40.16 Point for the $\frac{1}{4}$ sec. cor. of secs. 26 and 35 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground and in a collar of stone to brass cap mkd.

T11S R6W

$\frac{1}{2}$ — S26
S35

1966

Continue over gently rolling land.

Dependent Resurvey of T. 11 S., R. 6 W.

CHAINS

80.10 Road, improved, bears SW. and NE., irregularly.

80.32 The cor. of secs. 26, 27, 34 and 35, previously described.

Land, gently rolling.

Soil, sandy clay.

No timber.

Undergrowth, scattered to heavy sagebrush and shadscale.

N. 0° 14' E., bet. secs. 26 and 27.

Over gently rolling desert land through scattered to dense sagebrush and shadscale; asc. gradually.

7.00 Cow Hollow Creek, dry, 1 ft. deep, 10 lks. wide, drains SW., irregularly.

10.50 Trail road, bears S. 80° W. and N. 80° E.

40.29 The 1/4 sec. cor. of secs. 26 and 27, monumented with a quartzite, 10x10x6 ins. (record 14x10x6 ins.), firmly set and dimly mkd. "1/4" on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone to brass cap mkd.

T11S R6W

½
S27 | S26

1966

Deposit the original stone alongside the cor.

N. 0° 10' E., beginning new measurement.

Over gently rolling desert land; desc. gradually.

23.00 Wash, 1 ft. deep, 10 lks. wide, drains SW., irregularly; asc. gradually.

40.34 The cor. of secs. 22; 23, 26 and 27, monumented with a quartzite stone, 14x8x8 ins., firmly set and plainly mkd. with 2 notches on the S. and E. edge.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground and in a mound of stone, 3 ft. base to brass cap mkd.

T11S R6W

S22 | S23
S27 | S26

1966

Deposit the original stone alongside the cor.

Dependent Resurvey of T. 11 S., R. 6 W.

CHAINS	
	<p>Land, gently rolling. Soil, sandy, rocky clay. No timber. Undergrowth, scattered to dense sagebrush and shadscale.</p>
	<p>From the cor. of secs. 23, 24, 25 and 26, previously described.</p> <p>S. 89° 53' W., bet. secs. 23 and 26.</p> <p>Over rolling and broken land through dense juniper; 140 ft. over W. slope.</p>
6.98	Fence, net wire, bears nearly N. and S.
14.00	Enter dense juniper, bears N. and S.
22.00	Draw, drains S. 20° W.; asc. 30 ft. over SE. slope.
23.60	Trail road, bears N. 40° E. and S. 40° W.
29.60	Low ridge, bears N. 20° E. and S. 20° W.; desc. 60 ft. over W. slope.
32.40	Road, improved, bears N. and S.
38.40	Cow Hollow Creek, 6 ins. deep, 10 lks. wide, drains S.; asc. gradually over E. slope.
40.17	<p>Point for the 1/4 sec. cor. of secs. 23 and 26 at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone to brass cap mkd.</p>
	<p>T11S R6W</p> $\frac{1}{4} \frac{S23}{S26}$ <p>1966</p>
	Continue over rolling land; asc. gradually over E. slope.
52.64	Fence, netwire, bears N. 26° E. and S. 26° W., along top of low ridge; desc. 50 ft. over broken W. slope.
56.90	Small draw, drains S. 30° W.
60.15	Trail road, bears N. 40° W. and S. 40° E.
61.30	Small draw, drains S.
76.40	Wash, 2 ft. deep, 10 lks. wide, drains S. 30° W.; asc. gentle SE. slope.
80.34	<p>The cor. of secs. 22, 23, 26 and 27, previously described</p> <p>Land, rolling and broken. Soil, sandy, rocky clay. No timber. Undergrowth, scattered to heavy sagebrush and shadscale.</p>

Dependent Resurvey of T. 11 S., R. 6 W.

CHAINS

N. 0° 05' E., bet. secs. 22 and 23.

Over rolling bench land through heavy undergrowth of sagebrush; asc. gradually over SE. slope.

8.20 Road, unimproved, bears N. 45° E. and S. 45° W. along top of low ridge; desc. gradually over NW. slope.

33.00 Draw, drains S. 65° W.; asc. gradually over SE. slope.

40.34 Point for the 1/4 sec. cor. of secs. 22 and 23 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone to brass cap mkd.

T11S R6W

½
S22|S23

1966

Continue over rolling bench land; asc. 75 ft. over SE. slope.

52.30 Low ridge, bears N. 60° E. and S. 60° W.; desc. 60 ft. over broken NW. slope.

80.68 The cor. of secs. 14, 15, 22 and 23, monumented with a gray sandstone, 18x12x6 ins., firmly set and plainly mkd. with 3 notches on the S. and 2 notches on the E. edge.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone, to brass cap mkd.

T11S R6W

S15|S14
S22|S23

1966

Deposit the original stone alongside the cor.

Land, rolling.

Soil, sandy, rocky clay.

No timber.

Undergrowth, medium to heavy sagebrush and shadscale.

From the cor. of secs. 13, 14, 23 and 24, previously described.

S. 89° 49' W., bet. secs. 14 and 23.

Over mountainous land through dense juniper; by triangulation; desc. 50 ft. over E. slope.

6.00 Draw, drains S.; asc. 60 ft. over SE. slope.

Dependent Resurvey of T. 11 S., R. 6 W.

CHAINS	
25.00	Ridge, bears N. 30° E. and S. 30° W.; desc. 30 ft. over SW. slope.
30.00	Draw, drains S. 30° W.; asc. 30 ft. over SE. slope.
36.25	End of triangulation; asc. gradually over SE. slope.
40.61	Point for the 1/4 sec. cor. of secs. 14 and 23 at proportionate dist.; there is no remaining evidence of the original cor.
	Set an iron post, 30 ins. long, 2½ ins. diam., 16 ins. in the ground to solid rock and in a mound of stone, 3 ft. base to brass cap mkd.
	T11S R6W
	$\frac{1}{2} \frac{S14}{S23}$
	1966
	Continue over low rolling mountains through scattering to dense juniper; asc. gradually over SE. slope.
43.50	Ridge, bears N. 30° E. and S. 30° W.; desc. 120 ft. over gently rolling NW. slope.
47.70	Draw, drains S. 30° W.
54.70	Dirt road, unimproved, bears N. 50° E. and S. 50° W. along top of low ridge.
70.00	Leave dense juniper; continue through scattered juniper.
81.22	The cor. of secs. 14, 15, 22 and 23, previously described.
	Land, low, rolling mountains. Soil, sandy, rocky clay. Timber, scattered to dense juniper. Undergrowth, medium sagebrush and shadscale.
	N. 0° 12' E., bet. secs. 14 and 15.
	Over rolling bench land through scattered juniper and heavy sagebrush undergrowth; desc. gradually over NW. slope.
6.00	Wash, 10 ft. deep, 20 lks. wide; drains S. 45° W.; asc. 115 ft. over SE. slope.
27.50	Trail road, bears N. 60° E. and S. 60° W., along top of low ridge; desc. 55 ft. over NW. slope.
39.40	Draw, drains S. 60° W.; asc. gradually.
40.32	Point for the 1/4 sec. cor. of secs. 14 and 15 at proportionate dist.; there is no remaining evidence of the original cor.

Dependent Resurvey of T. 11 S., R. 6 W.

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground and in a collar of stone to brass cap mkd.

T11S R6W

$\frac{1}{2}$
S15|S14

1966

Continue over rolling bench land through scattered juniper; asc. 80 ft. over SE. slope.

- 47.70 Low ridge, bears N. 45° E. and S. 45° W.; desc. gradually over gentle NW. slope.
- 63.45 Fence, barbed wire, 4 strand, bears E. and W.
- 80.64 The cor. of secs. 10, 11, 14 and 15, monumented with a limestone, 12x8x6 ins. (record 14x10x8 ins.), firmly set and plainly mkd. with 4 notches on the S. and 2 notches on the E. edge.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone to brass cap mkd.

T11S R6W

S10|S11
S15|S14

1966

Deposit the original stone alongside the cor.

Land, rolling.

Soil, sandy, rocky clay.

Timber, scattered juniper.

Undergrowth, sagebrush and shadscale.

From the cor. of secs. 11, 12, 13 and 14, previously described.

S. 89° 41' W., bet. secs. 11 and 14.

Over mountainous land through dense juniper and heavy sagebrush undergrowth; asc. 45 ft. over SE. slope.

- 9.80 Ridge, bears N. 50° E. and S. 40° W.; desc. 180 ft. over W. slope.
- 27.70 Draw, drains S. 40° W.; asc. 35 ft. over SE. slope.
- 31.80 Spur, projects S. 50° W.; desc. 70 ft. over W. slope.
- 38.00 Wash, in Otts Canyon, 1 ft. deep, 15 lks. wide, drains S. 20° W.; thence over rolling bench land; asc. gradually

Dependent Resurvey of T. 11 S., R. 6 W.

CHAINS

40.54 Point for the 1/4 sec. cor. of secs. 11 and 14 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 16 ins. in the ground and in a mound of stone, 3 ft. base to brass cap mkd.

T11S R6W

½ $\frac{S11}{S14}$

1966

Continue over gently rolling bench land; asc. gradually.

48.70 Low ridge, bears N. 20° E. and S. 20° W.; desc. 90 ft. over NW. slope.

50.30 Trail road, bears S. 20° W. and N. 20° E.

61.10 Center of stock pond, 1.00 ch. diam.

76.68 Fence, barbed wire, bears N. 9° W. and S. 9° E.

81.08 The cor. of secs. 10, 11, 14 and 15, previously described.

Land, rolling.

Soil, sandy, rocky clay.

Timber, dense to scattering juniper.

Undergrowth, scattered to heavy sagebrush and shadscale.

N. 0° 05' E., bet. secs. 10 and 11.

Over mountainous land through dense juniper and heavy undergrowth of sagebrush; by triangulation.

Desc. 50 ft. over NW. slope.

14.00 Draw, drains S. 30° W.; asc. 60 ft. over SE. slope.

33.00 Joe's Canyon, drains S. 40° W.; asc. SE. slope.

39.00 Ridge, bears E. and W.; desc. gradually.

40.49 End of triangulation.

The 1/4 sec. cor. of secs. 10 and 11, monumented with a white sandstone, 12x6x4 ins. (record 16x10x5 ins.), firmly set and plainly mkd. "1/4" on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone to brass cap mkd.

T11S R6W

½ $\frac{S10}{S11}$

1966

Deposit the original cor. alongside the cor.

Dependent Resurvey of T. 11 S., R. 6 W.

CHAINS

N. 0° 02' E., beginning new measurement.

Continue over mountainous land through dense juniper; by triangulation.

Desc. 40 ft. over NW. slope.

21.00 Trail road, bears N. 40° W. and S. 30° E.

26.00 Draw, drains S. 30° W.; asc. SE. slope.

34.50 Trail road, bears N. 40° E. and S. 40° W.

40.15 End of triangulation.

The cor. of secs. 2, 3, 10 and 11, monumented with a white sandstone, 20x10x6 ins. (record 20x14x10 ins.), firmly set and plainly mkd. with 5 notches on the S. and 2 notches on the E. edge.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone to brass cap mkd.

T11S R6W

S3	S2
S10	S11

1966

Deposit the original stone alongside the cor.

Land, mountainous.

Soil, sandy, rocky clay.

Timber, scattered to dense juniper.

Undergrowth, scattered to dense sagebrush and shadscale.

From the cor. of secs. 1, 2, 11 and 12, previously described.

S. 89° 44' W., bet. secs. 2 and 11.

Over mountainous land through scattered to dense juniper; asc. 150 ft. over SE. slope.

8.00 Ridge, bears N. and S.; desc. 90 ft. over W. slope.

11.10 Draw, drains S.; asc. 90 ft. over E. slope.

18.00 Ridge, bears N. and S.; desc. 300 ft. over broken NW. slope.

24.00 Head of draw, drains S. 75° W.

28.80 Spur, projects S. 75° W.

38.20 Draw, drains S. 40° W.; asc. gradually over SE. slope.

40.28 Point for the 1/4 sec. cor. of secs. 2 and 11 at proportionate dist.; there is no remaining evidence of the original cor.

Dependent Resurvey of T. 11 S., R. 6 W.

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 12 ins. in the ground to solid rock and in a mound of stone, 4 ft. base to brass cap mkd.

T11S R6W

$\frac{1}{4}$ $\frac{S2}{S11}$

1966

Continue over mountainous land; asc. 90 ft. over SE. slope.

- 47.60 Ridge, bears N. 40° E. and S. 40° W.; desc. 165 ft. over W. slope.
- 55.65 Fence, barbed wire, bears N. and S., approx. 3.00 chs.; thence E.
- 56.25 Wash in Joes Canyon, 2 ft. deep, 10 lks. wide, drains S. 10° W.; thence over bottom of wide draw.
- 57.95 Trail road, bears N. 30° E. and S. 50° W.
- 67.90 Begin ascent over SE. slope; asc. 75 ft.
- 77.59 Fence, barbed wire, bears S. 21° W. and N. 21° E., 2.00 chs.; thence N. 31° W.
- 78.60 Ridge, bears N. 30° E. and S. 30° W.; desc. gradually over top of ridge.
- 80.56 The cor. of secs. 2, 3, 10 and 11, previously described.
- Land, mountainous.
Soil, sandy, rocky clay.
Timber, scattered to dense juniper.
Undergrowth, scattered to heavy sagebrush and shadscale.

N. $3^\circ 42'$ E., bet. secs. 2 and 3.

Over mountainous land through scattered juniper and medium sagebrush and shadscale undergrowth; asc. gradually to top of spur.

- 1.00 Spur, projects W.; desc. 20 ft. over NW. slope.
- 6.00 Draw, drains W.; asc. 120 ft. over SW. slope.
- 7.30 Fence, barbed wire, bears N. 31° W. and S. 31° E.
- 16.00 Spur, projects W.; desc. 100 ft. over NW. slope.
- 26.00 Draw, drains W.; asc. 150 ft. over S. slope.
- 37.00 Ridge, bears E. and W.; desc. 25 ft. over NW. slope.
- 39.48 Point for the $\frac{1}{4}$ sec. cor. of secs. 2 and 3 at proportionate dist.; there is no remaining evidence of the original cor.

Dependent Resurvey of T. 11 S., R. 6 W.

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins. in the ground and in a mound of stone, 3 ft. base to brass cap mkd.

T11S R6W

$\frac{1}{2}$
S3|S2

1966

Continue over mountainous land; desc. 45 ft. over NW. slope.

- 45.90 Draw, drains W.; asc. 175 ft. over SW. slope.
- 51.50 Ridge, bears E. and W.; desc. 145 ft. over broken NW. slope.
- 54.90 Draw, drains W.
- 63.90 Spur, projects W.
- 68.90 Draw, drains W.
- 72.25 Spur, projects W.
- 79.76 Point for the closing cor. of secs. 2 and 3 on the N. bdy. of the tp., the Second Standard Parallel South, at record distance from the standard corner of secs. 34 and 35, T. 10 S., R. 6 W.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground and in a collar of stone to brass cap mkd.

T10S R6W

S35

S3|S2

CIC

1966

From this cor., the standard cor. of secs. 34 and 35, T. 10 S., R. 6 W., bears West, 1.05 chs. dist., and is monumented with a $2\frac{1}{2}$ in. iron post, previously described.

The position for the $\frac{1}{4}$ sec. cor. of sec. 2 on the N. bdy. of the sec. is at midpoint bet. the closing cors. of secs. 1 and 2, and secs. 2 and 3, and on the Second Standard Parallel South.

At this point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground and in a collar of stone to brass cap mkd.

$\frac{1}{2}$ S2

T11S R6W

1966

Dependent Resurvey of T. 11 S., R. 6 W.

CHAINS

From this cor., the standard 1/4 sec. cor. of sec. 35, T. 11 S., R. 6 W., bears S. 89° 59' W., 1.26 chs. dist., previously described.

Land, mountainous.

Soil, sandy, rocky clay.

Timber, scattered to dense juniper.

Undergrowth, scattered to heavy sagebrush and shadscale.

From the cor. of secs. 3, 4, 33 and 34 on the S. bdy. of the tp., previously described.

N. 0° 21' E., bet. secs. 33 and 34.

Over nearly level desert land through medium undergrowth of sagebrush and shadscale.

1.50 Cow Hollow Creek, 4 ft. deep, 20 lks. wide, drains S. 45° W.; asc. gradually.

21.20 Wash, 1 ft. deep, 5 lks. wide, drains S. 45° W.

40.32 Point for the 1/4 sec. cor. of secs. 33 and 34 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone to brass cap mkd.

T11S R6W

½
S33|S34

1966

Thence over gently rolling desert land.

66.50 Wash, 1 ft. deep, 10 lks. wide, drains W. irregularly.

80.64 Point for the cor. of secs. 27, 28, 33 and 34 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone, 2 ft. base to brass cap mkd.

T11S R6W

S28|S27
S33|S34

1966

Land, gently rolling.

Soil, sandy, rocky clay.

No timber.

Undergrowth, medium sagebrush and shadscale.

From the cor. of secs. 26, 27, 34 and 35, previously described.

N. 89° 52' W., bet. secs. 27 and 34.

Dependent Resurvey of T. 11 S., R. 6 W.

CHAINS

Over gently rolling and broken desert land through medium undergrowth of sagebrush and shadscale; desc. gradually.

- 1.60 Cow Hollow Creek, drains SW.; irregularly.
 15.90 Wash, 1 ft. deep, 10 lks. wide, drains SW., irregularly.
 30.00 Wash, 1 ft. deep, 10 lks. wide, drains SW., irregularly.
 40.36 Point for the 1/4 sec. cor. of secs. 27 and 34 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground with brass cap mkd.

T11S R6W

½ — S27
 S34
 1966

Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.

Continue over gently rolling desert land.

- 71.60 Wash, 2 ft. deep, 20 lks. wide, drains S. 45° W.
 79.80 Dirt road, improved, bears N. 45° W. and S. 45° E.
 80.72 The cor. of secs. 27, 28, 33 and 34, previously described.

Land, gently rolling.
 Soil, sandy, rocky clay.
 No timber.
 Undergrowth, medium sagebrush and shadscale.

S. 89° 52' W., bet. secs. 28 and 33.

Over gently rolling desert land through medium undergrowth of sagebrush and shadscale.

- 17.00 Wash, 3 ft. deep, 10 lks. wide, drains S. 45° W.
 37.00 Wash, 2 ft. deep, 5 lks. wide, drains S. 20° W.
 40.57 Point for the 1/4 sec. cor. of secs. 28 and 33 at proportionate dist.; there is no remaining evidence of the original cor.
 Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone to brass cap mkd.

T11S R6W

½ — S28
 S33
 1966

Continue over gently rolling desert land.

- 65.20 Dirt road, unimproved, bears N. and S.

Dependent Resurvey of T. 11 S., R. 6 W.

CHAINS

81.14

The cor. of secs. 28, 29, 32 and 33, monumented with a quartzite stone, 20x10x8 ins., firmly set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 16 ins. in the ground to solid rock and in a mound of stone, 3 ft. base to brass cap mkd.

T11S. R6W

S29|S28

S32|S33

1966

Deposit the original stone alongside the cor.

Land, gently rolling.

Soil, sandy, rocky clay.

No timber.

Undergrowth, medium to heavy sagebrush and shadscale.

From the cor. of secs. 27, 28, 33 and 34, previously described.

N. 0° 10' E., bet. secs. 27 and 28.

Over gently rolling desert land through medium undergrowth of sagebrush and shadscale.

2.30

Dirt road, bears N. 20° W. and S. 20° E.

11.50

Dirt road, bears N. 30° E. and S. 10° W.

22.10

Wash, 4 ft. deep, 20 lks. wide, drains W.

40.32

Point for the 1/4 sec. cor. of secs. 27 and 28 at proportionate dist.; there is no remaining evidence of the original cor.

Thence over rolling desert land.

78.60

Wash, 3 ft. deep, 20 lks. wide, drains S. 80° W.

79.00

Trail road, bears N. 80° E. and S. 80° W.

80.64

The cor. of secs. 21, 22, 27 and 28, monumented with a quartzite stone, 12x10x5 ins., firmly set and mkd. with 2 notches on S. and 3 notches on E. edge.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground and in a mound of stone, 3 ft. base to brass cap mkd.

T11S R6W

S21|S22

S28|S27

1966

Deposit the original stone alongside the cor.

Dependent Resurvey of T. 11 S., R. 6 W.

CHAINS

Land, gently rolling to rolling.
Soil, sandy, rocky clay.
No timber.
Undergrowth, medium sagebrush and shadscale.

From the cor. of secs. 22, 23, 26 and 27, previously described.

N. 89° 55' W., bet. secs. 22 and 27.

Over rolling desert land through scattered undergrowth of sagebrush and shadscale; asc. gradually.

2.90 Low ridge, bears N. 45° E. and S. 45° W.; desc. gradually.

9.70 Draw, drains S. 45° W.; asc. gradually.

16.30 Trail road, bears N. 45° E. and S. 45° W. along top of low ridge; desc. gradually.

40.44 Point for the 1/4 sec. cor. of secs. 22 and 27 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to solid rock and in a mound of stone, 3 ft. base to brass cap mkd.

T11S R6W

¼ $\frac{S22}{S27}$

1966

Continue over rolling desert land; desc. gradually.

49.10 Draw, drains S. 60° W.; asc. 75 ft. over SE. slope.

60.60 Low ridge, bears N. 60° E. and S. 60° W.; desc. 50 ft. over NW. slope.

73.30 Wash, 2 ft. deep, 10 lks. wide, drains S. 80° W.

76.80 Trail road, bears S. 80° W. and N. 80° E.

80.88 The cor. of secs. 21, 22, 27 and 28, previously described.

Land, rolling.
Soil, sandy, rocky clay.
No timber.
Undergrowth, scattered sagebrush and shadscale.

S. 89° 38' W., bet. secs. 21 and 28.

Over gently rolling desert land through heavy undergrowth of shadscale and scattered sagebrush; desc. gradually.

4.50 Wash, 3 ft. deep, 15 lks. wide, drains S. 60° W.

Dependent Resurvey of T. 11 S., R. 6 W.

CHAINS

40.40

Point for the 1/4 sec. cor. of secs. 21 and 28 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone, to brass cap mkd.

T11S R6W

$$\frac{1}{4} \frac{S21}{S28}$$

1966

Continue over rolling land; desc. gradually.

42.00

Dirt road, improved, bears N. 28° W. and S. 28° E.

67.20

Wash, 4 ft. deep, 20 lks. wide, drains S. 70° W.

73.00

Same wash, drains N. 70° W.

80.80

The cor. of secs. 20, 21, 28 and 29, monumented with a sandstone 18x10x4 ins. (record 16x12x4 ins.), firmly set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground with brass cap mkd.

T11S R6W

$$\frac{S20}{S29} \frac{S21}{S28}$$

1966

Deposit the original stone alongside and raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Land, rolling.

Soil, sandy, rocky clay.

No timber.

Undergrowth, medium sagebrush and shadscale.

From the cor. of secs. 21, 22, 27 and 28, previously described.

N. 0° 15' E., bet. secs. 21 and 22.

Over gently rolling desert land through heavy undergrowth of sagebrush and shadscale; asc. gradually.

2.90

Wash, 2 ft. deep, 10 lks. wide, drains W.

30.40

Wash, 1 ft. deep, 5 lks. wide, drains S. 60° W.

40.29

Point for the 1/4 sec. cor. of secs. 21 and 22 at proportionate dist.; there is no remaining evidence of the original cor.

Dependent Resurvey of T. 11 S., R. 6 W.

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground and in a collar of stone to brass cap mkd.

T11S R6W

$\frac{1}{2}$
S21 | S22

1966

Continue over gently rolling desert land.

67.10 Wash, 1 ft. deep, 10 lks. wide, drains S. 45° W.

74.50 Trail road, bears S. 45° W. and N. 45° E.

80.58 Point for the cor. of secs. 15, 16, 21 and 22 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground and in a collar of stone to brass cap mkd.

T11S R6W

S16 | S15
S21 | S22

1966

Land, gently rolling.
Soil, sandy, rocky clay.
No timber.

Undergrowth, medium sagebrush and shadscale.

From the cor. of secs. 14, 15, 22 and 23, previously described.

N. $89^\circ 52'$ W., bet. secs. 15 and 22.

Over rolling desert land through medium undergrowth of sagebrush and shadscale; desc. 50 ft. over NW slope.

9.50 Draw, drains S.

14.30 Trail road, bears N. and S.

22.50 Begin steep ascent over SE. slope, bears N. and S.; asc. 140 ft.

40.00 Spur, projects S.; continue ascent.

40.40 Point for the $\frac{1}{4}$ sec. cor. of secs. 15 and 22 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ diam., 24" in the ground and in a collar of stone to brass cap mkd.

T11S R6W

$\frac{1}{2}$ — S15
S22

1966

Asc. gradually.

Dependent Resurvey of T. 11 S., R. 6 W.

CHAINS

- 51.20 Ridge, bears N. and S.; desc. 30 ft. over NW. slope.
 69.30 Draw, drains S.; asc. 40 ft. over SE. slope.
 75.70 Ridge, bears N. and S.
 76.70 Trail road, bears N. and S. 45° W.
 80.80 The cor. of secs. 15, 16, 21 and 22, previously described.

N. 0° 11' W., bet. secs. 15 and 16.

Over gently rolling desert land through heavy undergrowth of sagebrush and shadscale; asc. gradually.

- 12.50 Trail road, bears E. and W.
 14.16 Fence, barbed wire, 4 strand, bears E. and W.
 14.60 Wash in Joe's Canyon, 3 ft. deep, 30 lks. wide, drains W.
 40.29 Point for the 1/4 sec. cor. of secs. 15 and 16 at proportionate dist.; there is no remaining evidence of the original cor.
 Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground and in a collar of stone to brass cap mkd.

T11S R6W

½
 S16 | S15

1966

Continue over gently rolling desert land.

- 73.10 Wash, 1 ft. deep, 5 lks. wide, drains W.
 80.58 Point for the cor. of secs. 9, 10, 15 and 16 at proportionate dist.; there is no remaining evidence of the original cor.
 Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone to brass cap mkd.

T11S R6W

S9 | S10
 S16 | S15

1966

Land, gently rolling.
 Soil, sandy, rocky clay.
 No timber.
 Undergrowth, medium to heavy sagebrush and shadscale.

From the cor. of secs. 10, 11, 14 and 15, previously described.

S. 89° 59' W., bet. secs. 10 and 15.

Dependent Resurvey of T. 11 S., R. 6 W.

CHAINS

Over gently rolling desert land through dense juniper and heavy undergrowth of sagebrush and shadscale; descent 70 ft. over broken SW. slope.

- 12.20 Leave dense juniper, bears NE. and SW.
- 12.60 Wash, 4 ft. deep, 20 lks. wide, drains S. 45° W.; thence over bottom of wide draw.
- 27.20 Wash in Joes Canyon, 4 ft. deep, 20 lks. wide, drains S. 30° W.
- 40.59 Point for the 1/4 sec. cor. of secs. 10 and 15 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone to brass cap mkd.

T11S R6W

½ — S10
S15

1966

Continue over broken SW. slope; desc. 75 ft.

- 65.60 Wash, 3 ft. deep, 20 lks. wide, drains S. 60° W.
- 81.18 The cor. of secs. 9, 10, 15 and 16, previously described.

Land, gently rolling and broken.
Soil, sandy, rocky clay.
Timber, scattered to dense juniper.
Undergrowth, medium sagebrush and shadscale.

N. 0° 47' W., bet. secs. 9 and 10.

Over rolling desert land through heavy undergrowth of sagebrush and shadscale; asc. gradually.

- 40.29 The 1/4 sec. cor. of secs. 9 and 10, monumented with a gray sandstone, 12x8x6 ins., firmly set and dimly mkd. "1/4" on W. face and witnessed by a scattered mound of stone W. of cor.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 16 ins. in the ground to solid rock and in a mound of stone, 3 ft. base to brass cap mkd.

T11S R6W

½ — S9 | S10

1966

Deposit the original stone alongside the cor.

N. 0° 39' E., beginning new measurement.

Over gently rolling desert land through medium undergrowth of sagebrush and shadscale; desc. gradually over

Dependent Resurvey of T. 11 S., R. 6 W.

CHAINS

NW. slope.

- 1.50 Draw, drains S. 60° W.; asc. gradually over SE. slope.
- 6.65 Dirt road, unimproved, bears E. and W.; desc. gradually over NW. slope.
- 15.80 Draw, drains W.; asc. gradually over S. slope.
- 27.00 Enter scattered juniper; low ridge, bears E. and W.
- 35.00 Low ridge, bears E. and W.; desc. gradually over N. slope.
- 40.00 Point for the cor. of secs. 3, 4, 9 and 10 at record dist. in northing from the 1/4 sec. cor. of secs. 9 and 10, and at proportionate dist. longitudinally; there is no remaining evidence of the original cor.

Note: Because of the Independent Resurvey executed in 1907 by A. J. Stookey on the West 4 miles of the S. bdy. of T. 10 S., R. 6 W., the Second Standard Parallel South, it is not possible to establish the closing cors. of secs. 3, and 4, 4 and 5, and 5 and 6 by proportionate methods. The cors. of secs. 3, 4, 9 and 10 and 5, 6, 7 and 8, and the 1/4 sec. cor. of secs. 7 and 8, hereinafter described, are established at proportionate dist. longitudinally and at record dist. latitudinally from the last existing original cor. on the meridional lines.

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground and in a mound of stone, 3 ft. base to brass cap mkd.

T11S R6W

S4	S3
<hr/>	
S9	S10

1966

Land, rolling.
Soil, sandy, rocky clay.
Timber, scattered juniper on N. 20 chs.
Undergrowth, scattered to heavy sagebrush and shadscale.

From the cor. of secs. 2, 3, 10 and 11, previously described.

S. 89° 36' W., bet. secs. 3 and 10.

Over rolling mountains through dense juniper; by triangulation.

- 11.00 Draw, drains S. 40° W.; asc. along SE. slope.
- 40.69 Point for the 1/4 sec. cor. of secs. 3 and 10 at proportionate dist.; there is no remaining evidence of the original cor.
- Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground with brass cap mkd.

Dependent Resurvey of T. 11 S., R. 6 W.

CHAINS

T11S R6W

$$\frac{1}{2} \frac{S3}{S10}$$

1966

Raise a mound of stone, 3 ft. base, $2\frac{1}{2}$ ft. high, N. of cor.; there are no suitable bearing trees available.

Thence over rolling and broken bench land through dense juniper; desc. 75 ft.

- 52.70 Small draw, drains S. 10° W.
 54.50 Low spur, projects S. 10° W.
 58.10 Small draw, drains S. 10° W.
 63.70 Low spur, projects S. 10° W.
 67.80 Small wash, drains S. 10° W.
 72.70 Low spur, projects S. 45° W.
 78.70 Leave dense juniper; thence through scattered juniper and medium undergrowth of sagebrush and shadscale.
 81.38 The cor. of secs. 3, 4, 9 and 10, previously described.

Land, gently rolling mountains.
 Soil, sandy, rocky clay.
 Timber, scattered to dense juniper.
 Undergrowth, sagebrush and shadscale.

Independent Resurvey Between Secs. 3
 and 4, T. 11 S., R. 6 W.

Superseding the Survey Executed by Joseph
 Gorkinski in 1872.

North, bet. secs. 3 and 4.

Over rolling bench land through scattered juniper and heavy undergrowth of sagebrush and shadscale; asc. 55 ft. over SE. slope.

- 13.50 Trail road, bears N. 55° E. and S. 55° W., along top of low spur, projects S. 55° W.; continue ascent over NW. slope; asc. 15 ft., enter dense juniper.
 15.00 Wash, 6 ft. deep, 40 lks. wide, drains S. 60° W.
 26.90 Top of ascent, bears N. 60° E. and S. 60° W.; thence over gently rolling land.
 32.50 Trail road, bears N. 10° E. and S. 50° W.
 34.00 Trail road, bears N. 45° E. 1.00 ch.; thence curves N. and S. 45° W., 2.00 chs.; thence curves S.
 34.70 NE. cor. of old corral from which a fence bears N. 15° E.; enter cultivated field.

Independent Resurvey Between Secs. 3 and 4, T. 11 S., R. 6 W.

CHAINS

40.00

Point for the 1/4 sec. cor. of secs. 3 and 4; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone to brass cap mkd.

T11S R6W

$$\begin{array}{c} \frac{1}{2} \\ S4 \mid S3 \end{array}$$

1966

Continue over cultivated field.

48.88

Fence, bears N. 70° W. and S. 70° E.; leave cultivated field enter dense juniper and heavy undergrowth of sagebrush.

49.20

Small stream, 6 ins. deep, 4 lks. wide, flows S. 45° W.

55.70

Small stream, 6 ins. deep, 4 lks. wide, flows S. 40° W.

80.08

Intersect the Second Standard Parallel South; point for the closing cor. of secs. 3 and 4.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone to brass cap mkd.

T10S R6W

$$\begin{array}{c} S33 \\ \hline S4 \mid S3 \\ C \mid C \end{array}$$

1966

From which the standard cor. of secs. 33 and 34, T. 10 S., R. 6 W., bears N. 89° 50' E., 5.19 lks. dist., previously described.

The point for the 1/4 sec. cor. of sec. 3 is at midpoint bet. the closing cors. of secs. 2 and 3 and secs. 3 and 4, and on the Second Standard Parallel South.

At this point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone to brass cap mkd.

$$\begin{array}{c} \frac{1}{2} \quad S3 \\ \hline T11S R6W \end{array}$$

1966

From this cor., the standard 1/4 sec. cor. of secs. 34, T. 10 S., R. 6 W., bears N. 89° 46' E., 2.03 chs. dist., previously described.

Land, rolling.

Soil, sandy, rocky clay.

Timber, scattered to dense juniper.

Undergrowth, scattered to heavy sagebrush and shadscale.

Dependent Resurvey of T. 11 S., R. 6 W.

Reestablishment of the Survey Executed by
Joseph Gorkinski in 1872.

Dependent Resurvey of T. 11 S., R. 6 W.

CHAINS

From the cor. of secs. 20, 21, 28 and 29, previously described.

N. 0° 01' E., bet. secs. 20 and 21.

Over nearly level desert land through heavy undergrowth of sagebrush and shadscale.

- 4.00 Wash, 3 ft. deep, 20 lks. wide, drains N. 70° W.
 20.00 Trail road, bears NE. and SW.
 40.47 The 1/4 sec. cor. of secs. 20 and 21, monumented with a cobblestone, 12x9x7 ins., firmly set and plainly mkd. "1/4" on the W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground and in a mound of stone, 3 ft. base to brass cap mkd.

T11S R6W

½
 S20 | S21

1966

Deposit the original stone alongside the cor.

N. 0° 01' E., beginning new measurement.

Continue over nearly level desert land.

- 16.70 Wash, 3 ft. deep, 10 lks. wide, drains W.
 19.40 Dirt road, improved, bears N. 45° W. and S. 45° E.
 39.99 The cor. of secs. 16, 17, 20 and 21, monumented with a cobblestone, 16x12x8 ins., firmly set and plainly mkd. with 4 notches on the E. and 3 notches on the S. edge.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone to brass cap mkd.

T11S R6W

S17 | S16
 S20 | S21

1966

Deposit the original stone alongside the cor.

Land, nearly level.
 Soil, sandy, rocky clay.
 No timber.
 Undergrowth, heavy sagebrush and shadscale.

Dependent Resurvey of T. 11 S., R. 6 W.

CHAINS	
	<p>From the cor. of secs. 15, 16, 21 and 22, previously described.</p> <p>S. 89° 28' W., bet. secs. 16 and 21.</p> <p>Over nearly level desert land through heavy undergrowth of sagebrush and shadscale.</p>
17.00	Dirt road, unimproved, bears N. 60° W. and S. 60° E.
40.52	<p>Point for the 1/4 sec. cor. of secs. 16 and 21; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone to brass cap mkd.</p>
	<p>T11S R6W</p> $\frac{1}{4} \frac{S16}{S21}$ <p>1966</p>
48.00	Continue over nearly level land. Dirt road, unimproved, bears N. and S.
51.00	Wash, 4 ft. deep, 30 lks. wide, drains S. 45° W.
81.04	<p>The cor. of secs. 16, 17, 20 and 21, previously described.</p> <p>Land, nearly level. Soil, sandy, rocky clay. No timber. Undergrowth, heavy sagebrush and shadscale.</p>
	<p>North, bet. secs. 16 and 17.</p> <p>Over nearly level desert land through heavy undergrowth of sagebrush and shadscale.</p>
20.00	Wash, 2 ft. deep, 10 lks. wide, drains W.
32.00	Wash, 3 ft. deep, 10 lks. wide, drains W.
40.20	<p>The 1/4 sec. cor. of secs. 16 and 17, monumented with a cobblestone, 16x12x5 ins. (record 12x8x7 ins.), firmly set and dimly mkd. "1/4" on W. face.</p> <p>At the cor. point</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground and in a collar of stone to brass cap mkd.</p>
	<p>T11S R6W</p> $\frac{1}{4} \frac{S17}{S16}$ <p>1966</p>
	<p>Deposit the original stone alongside the cor.</p>
	<hr style="width: 10%; margin: 0 auto;"/> <p>N. 0° 05' E., beginning new measurement.</p>

Dependent Resurvey of T. 11 S., R. 6 W.

CHAINS

Over nearly level desert land through heavy undergrowth of sagebrush and shadscale.

- 3.60 Wash, 5 ft. deep, 40 lks. wide, drains S. 60° W.
- 5.00 Dirt road, improved, bears N. 50° E. and S. 50° W.
- 40.24 The cor. of secs. 8, 9, 16 and 17, monumented with a cobblestone, 13x9x6 ins., firmly set and plainly mkd. with 4 notches on the S. and E. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone to brass cap mkd.

T11S R6W

S8	S9
S17	S16

1966

Deposit the original stone alongside the cor.

Land, nearly level.

Soil, sandy, rocky clay.

No timber.

Undergrowth, heavy sagebrush and shadscale.

From the cor. of secs. 9, 10, 15 and 16, previously described.

S. 88° 45' W., bet. secs. 9 and 16.

Over rolling and broken desert land through medium undergrowth of sagebrush and shadscale; asc. gradually along S. slope.

- 15.60 Trail road, bears N. 10° E. and S. 10° W. along top of low ridge; desc. 65 ft. over NW. slope.
- 27.60 Draw, drains S. 60° W.; asc. 50 ft. over SE. slope.
- 29.80 Top of ascent, bears NE. and SW.; thence over nearly level land.
- 33.60 Wash, 2 ft. deep, 15 lks. wide, drains S.
- 37.60 Trail road, bears N. and S.
- 40.58 The 1/4 sec. cor. of secs. 9 and 16, monumented with a limestone, 12x8x4 ins. (record 12x10x8 ins.), firmly set and plainly mkd. "1/4" on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone to brass cap mkd.

T11S R6W

½	S9
	S16

1966

Dependent Resurvey of T. 11 S., R. 6 W.

CHAINS

Deposit the original stone alongside the cor.

N. 89° 59' W., beginning new measurement.

Over nearly level desert land.

23.20 Sheep Rock Creek, dry, 4 ft. deep, 20 lks. wide, drains S. 45° W.

25.15 Dirt road, improved, bears N. and S.

40.15 The cor. of secs. 8, 9, 16 and 17, previously described.

Land, rolling on E. 1/2 mi.; nearly level on W. 1/2 mi.
Soil, sandy, rocky clay.

No timber.

Undergrowth; medium sagebrush and shadscale.

N. 89° 39' W., bet. secs. 8 and 17.

Over nearly level desert land through medium undergrowth of sagebrush and shadscale.

6.00 Wash, 2 ft. deep, 10 lks. wide, drains S. 30° W.

24.00 Dirt road, unimproved, bears S. 70° W. and N. 70° E.

34.00 Wash, 4 ft. deep, 20 lks. wide, drains S. 30° W.

40.22 Point for the 1/4 sec. cor. of secs. 8 and 17 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone to brass cap mkd.

T11S R6W

½ $\frac{S8}{S17}$

1966

Continue over nearly level land.

66.00 Wash, 2 ft. deep, 10 lks. wide, drains S. 30° W.

76.00 Dirt road, unimproved, bears N. and S.

77.00 Wash, 2 ft. deep, 10 lks. wide, drains S. 30° W.

80.44 The cor. of secs. 7, 8, 17 and 18, monumented with a conglomerate quartz stone, 12x8x4 ins. (record 8x8x3 ins.) firmly set and plainly mkd. with 5 notches on E. and 4 notches on S. edge.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone to brass cap mkd.

Dependent Resurvey of T. 11 S., R. 6 W.

CHAINS

T11S R6W

S7	S8
S18	S17

1966

Deposit the original stone alongside the cor.

Land, nearly level.
Soil, sandy, rocky clay.
No timber.
Undergrowth, medium sagebrush and shadscale.

S. 89° 45' W., bet. secs. 7 and 18.

Over nearly level desert land through medium undergrowth of sagebrush and shadscale.

11.00 Trail road, bears N. 45° W. and S. 45° E.

40.36 Point for the 1/4 sec. cor. of secs. 7 and 18 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone to brass cap mkd.

T11S R6W

¼	S7
	S18

1966

Continue over nearly level desert land.

45.40 Trail road, bears N. 75° E. and S. 75° W.

70.00 Wash, 5 ft. deep, 30 lks. wide, drains S. 45° W.

80.60 The cor. of secs. 7 and 18 on the W. bdy. of the tp., monumented with an iron post, 3 ins. diam., firmly set, mkd. and witnessed as described in the official record.

Land, nearly level.
Soil, sandy, rocky clay.
No timber.
Undergrowth, medium sagebrush and shadscale.

From the cor. of secs. 8, 9, 16 and 17, previously described.

N. 0° 07' E., bet. secs. 8 and 9.

Over nearly level desert land through medium undergrowth of sagebrush and shadscale.

24.00 Trail road, bears N. 35° E. and S. 35° W.

28.00 Wash, 2 ft. deep, 15 lks. wide, drains S. 45° W.

40.24 The 1/4 sec. cor. of secs. 8 and 9, monumented with a sandstone, 14x10x4 ins., firmly set and plainly mkd. "1/4" on W. face.

Dependent Resurvey of T. 11 S., R. 6 W.

CHAINS

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins.
in the ground and in a collar of stone, to brass cap mkd.

T11S R6W

$$\frac{1}{2}$$

S8		S9
----	--	----

1966

Deposit the original stone alongside the cor.

N. $0^{\circ} 13'$ E., beginning new measurement.

Continue over nearly level desert land.

16.00 Wash, 2 ft. deep, 10 lks. wide, drains S. 45° W.

23.00 Trail road, bears E. and W.

32.00 Wash, 2 ft. deep 15 lks. wide, drains W.

38.00 Dirt road, improved, bears E. and W.

40.23 The cor. of secs. 4, 5, 8 and 9, monumented with a
sandstone, 13x10x5 ins., firmly set and plainly mkd.
with 5 notches on the S. and 4 notches on the E. edge.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins.
in the ground and in a collar of stone to brass cap mkd.

T11S R6W

S5		S4
S8		S9

1966

Deposit the original stone alongside the cor.

Land, nearly level.

Soil, sandy, rocky clay.

No timber.

Undergrowth, medium sagebrush and shadscale.

From the cor. of secs. 3, 4, 9 and 10, previously
described.

S. $89^{\circ} 17'$ W., bet. secs. 4 and 9.

Over gently rolling desert land through scattered juniper
and medium undergrowth of sagebrush and shadscale; asc.
gradually.

3.70 Low ridge, bears N. 45° E. and S. 45° W.; desc. 700 ft.
over gentle SW. slope.

24.70 Trail road, bears N. 25° W. and S. 25° E.

Dependent Resurvey of T. 11 S. R. 6 W.

- 37.70 Sheep Rock Creek, dry, 2 ft. deep, 10 lks. wide, drains S. 20° W.; thence over nearly level land.
- 40.66 The 1/4 sec. cor. of secs. 4 and 9, monumented with a sandstone, 17x8x6 ins., firmly set and dimly mkd. "1/4" on N. face.
- At the cor. point
- Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone, to brass cap mkd.

T11S R6W

$$\frac{1}{4} \frac{S4}{S9}$$

1966

Deposit the original stone alongside the cor.

S. 89° 52' W., beginning new measurement.

Over nearly level desert land through scattered juniper and medium undergrowth of sagebrush and shadscale.

- 2.20 Trail road, unimproved, bears N. 45° W. and S. 45° E.
- 3.70 Small stock pond bears N., 1.00 ch. dist.
- 16.70 Trail road, bears N. 55° E. and S. 55° W.
- 22.70 Wash, 3 ft. deep, 20 lks. wide, drains S. 60° W.
- 23.70 Dirt road, improved, bears N. and S.
- 39.72 The cor. of secs. 4, 5, 8 and 9, previously described.

Land, gently rolling.
Soil, sand, rocky clay.
Timber, scattered juniper.
Undergrowth, medium sagebrush and shadscale.

Independent Resurvey Between Secs.
4 and 5, T. 11 S., R. 6 W.

Superseding the Survey Executed by
Joseph Gorkinski in 1872.

North, bet. secs. 4 and 5.

Over nearly level desert land through scattered sagebrush and shadscale; asc. gradually.

- 6.00 Wash in Hard to Beat Canyon, 2 ft. deep, 10 lks. wide, drains W.
- 24.00 Wash, 2 ft. deep, 15 lks. wide, drains S. 45° W.
- 28.00 Enter scattered juniper.
- 40.00 Point for the 1/4 sec. cor. of secs. 4 and 5; there is no remaining evidence of the original cor.

Independent Resurvey Between Secs.
4 and 5, T. 11 S., R. 6 W.

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground and in a mound of stone, 3 ft. base to brass cap mkd.

T11S R6W

$$\frac{1}{4} \text{ S4}$$

1966

Continue over gently rolling land; asc. gradually.

43.00 Wash, 3 ft. deep, 20 lks. wide, drains S. 30° W.

53.00 Wash, 5 ft. deep, 30 lks. wide, drains W.

80.30 Dozed trail, bears E. and W.

80.37 Fence, 4 strand, barbed wire, bears E. and W.

80.47 Intersect the Second Standard Parallel South.

Point for the closing cor. of secs. 4 and 5.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground and in a collar of stone to brass cap mkd.

T10S R6W

S32

$$\frac{1}{4} \text{ S4}$$

C | C

T11S R6W

1966

From which the standard cor. for secs. 32 and 33, T. 10 S., R. 6 W., bears N. $89^\circ 50'$ E., 5.11 chs. dist., previously described.

The position for the $\frac{1}{4}$ sec. cor. of sec. 4 is at midpoint bet. the closing cors. of secs. 3 and 4 and 4 and 5, and on the Second Standard Parallel South.

At this point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground and in a collar of stone to brass cap mkd.

$$\frac{1}{4} \text{ S4}$$

T11S R6W

1966

From this cor., the standard $\frac{1}{4}$ sec. cor. of sec. 33, T. 11 S., R. 6 W., bears N. $89^\circ 49'$ E., 5.13 chs. dist., previously described.

Land, gently rolling.

Soil, sandy, rocky clay.

Timber, scattered juniper.

Undergrowth, scattered sagebrush and shadscale.

Dependent Resurvey of T. 11 S., R. 6 W.

Dependent Resurvey of T. 11 S., R. 6 W.

CHAINS

Reestablishment of the Survey Executed
by Joseph Gorkinski in 1872.

From the cor. of secs. 7, 8, 17 and 18, previously described.

N. 0° 20' E., bet. secs. 7 and 8.

Over nearly level desert land through scattered sagebrush and shadscale.

- 4.60 Dirt road, improved, bears N. 30° W. and S. 30° E.
24.00 Trail road, bears E. and W.
29.00 Wash in Hard to Beat Canyon, 4 ft. deep, 30 lks. wide, drains W.
40.00 Point for the 1/4 sec. cor. of secs. 7 and 8; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone to brass cap mkd.

T11S R6W

½
S7|S8

1966

Continue over nearly level land.

- 43.00 Wash, 2 ft. deep, 15 lks. wide, drains W.
80.00 Point for the cor. of secs. 5, 6, 7 and 8, at record distance latitudinally and at proportionate distance longitudinally; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground and in a collar of stone to brass cap mkd.

T11S R6W

S6|S5
S7|S8

1966

Land, nearly level.
Soil, sandy, rocky clay.
No timber.
Undergrowth, scattered sagebrush and shadscale.

From the cor. of secs. 4, 5, 8 and 9, previously described.

N. 89° 58' W., bet. secs. 5 and 8.

Over nearly level desert land through scattered shadscale and sagebrush.

- 5.00 Wash, 2 ft. deep, 10 lks. wide, drains S. 45° W.
8.00 Dirt road, improved, bears N. 70° W. and S. 70° E.
21.00 Wash, 4 ft. deep, 20 lks. wide, drains S. 45° W.

Dependent Resurvey of T. 11 S., R. 6 W.

CHAINS

- 25.00 Wash, 3 ft. deep, 15 lks. wide, drains S.
- 40.16 Point for the 1/4 sec. cor. of secs. 5 and 8 at proportionate dist.; there is no remaining evidence of the original cor.
- Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone to brass cap mkd.
- T11S R6W
 $\frac{1}{4} \frac{S5}{S8}$
 1966
- Continue over nearly level land.
- 60.00 Wash, 2 ft. deep, 10 lks. wide, drains S. 30° W.
- 80.32 The cor. of secs. 5, 6, 7 and 8, previously described.
- Land, nearly level.
 Soil, sandy, rocky clay.
 No timber.
 Undergrowth, scattered sagebrush and shadscale.
-
- S. 89° 47' W., bet. secs. 6 and 7.
- Over nearly level desert land through scattered sagebrush and shadscale.
- 36.75 Wash, 6 ft. deep, 50 lks. wide, drains S. 45° W.
- 40.33 Point for the 1/4 sec. cor. of secs. 6 and 7 at proportionate dist.; there is no remaining evidence of the original cor.
- Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone to brass cap mkd.
- T11S R6W
 $\frac{1}{4} \frac{S6}{S7}$
 1966
- Continue over nearly level desert land.
- 55.75 Trail road, bears N. and S.
- 73.25 Wash, 5 ft. deep, 40 lks. wide, drains S. 45° W.
- 77.75 Wash, 7 ft. deep, 60 lks. wide, drains S. 45° W.
- 80.90 The cor. of secs. 6 and 7 on the W. bdy. of the tp., monumented with a 3 in. iron post, set, mkd. and witnessed as described in the official record.
- Land, nearly level.
 Soil, sandy, rocky clay.
 No timber.
 Undergrowth, scattered sagebrush and shadscale.

Independent Resurvey Between
Secs. 5 and 6, T. 11 S., R. 6 W.

CHAINS

Superseding the Survey Executed
by Joseph Gorlinski in 1872.

From the cor. of secs. 5, 6, 7 and 8, previously described.

North, bet. secs. 5 and 6.

Over nearly level land through scattered sagebrush and shadscale.

- 15.00 Dirt road, improved, bears N. 80° W. and S. 80° E.
35.70 Enter rolling desert land.
38.00 Draw, drains W.
40.00 Point for the 1/4 sec. cor. of secs. 5 and 6; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 16 ins. in the ground to solid rock and in a mound of stone, 3 ft. base to brass cap mkd.

T11S R6W

$\frac{1}{2}$
S6 | S5

1966

Continue over rolling desert land; asc. 55 ft. over SE. slope.

- 44.00 Low ridge, bears N. 45° E. and S. 45° W.; desc. 55 ft. over NW. slope.
46.00 Trail road, bears N. 45° E. and S. 45° W.; enter scattered juniper.
72.00 Draw, drains S. 20° W.; asc. 50 ft. over SE. slope; enter dense juniper.
80.00 Dozed trail, bears E. and W.
80.06 Fence line, 4 strand, barbed wire, bears E. and W.

Intersect Second Standard Parallel South; point for the closing cor. of secs. 5 and 6.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone to brass cap mkd.

T10S R6W

S31
S6 | S5
C1C

1966

From which the standard cor. of secs. 31 and 32, T. 10 S., R. 6 W., bears N. 89° 56' E., 5.04 chs. dist., previously described.

The position for the 1/4 sec. cor. on the N. bdy. of sec. 5 is on the Second Standard Parallel South and at midpoint bet. the closing cors. of secs. 4 and 5, and 5 and 6.

Independent Resurvey of T. 11 S., R. 6 W.

CHAINS

At this point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground and in a collar of stone to brass cap mkd.

$\frac{1}{4}$ S5
T11S R6W
1966

From which the standard $\frac{1}{4}$ sec. cor. of sec. 32, T. 10 S., R. 6 W., bears N. $89^{\circ} 47'$ E., 5.22 chs. dist., previously described.

The position for the $\frac{1}{4}$ sec. cor. on the N. bdy. of sec. 6 is at proportionate dist. bet. the closing cor. of secs. 5 and 6 and the standard cor. of Tps. 10 and 11 S., Rs. 6 and 7 W., and on the Second Standard Parallel South.

At a point 40.28 chs. westing from the closing cor. of secs. 5 and 6 and on the Second Standard Parallel South.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground and in a collar of stone to brass cap mkd.

$\frac{1}{4}$ S6
T11S R6W
1966

From which the standard $\frac{1}{4}$ sec. cor. of sec. 31, T. 10 S., R. 6 W., bears N. $89^{\circ} 41'$ E., 4.99 chs. dist., previously described.

Land, rolling and broken.
Soil, sandy, rocky clay.
Timber, scattered to dense juniper.
Undergrowth, scattered sagebrush and shadscale.

At the cor. of secs. 17, 18, 19 and 20, marked with a quartzite stone, 16x9x4 ins., firmly set and plainly mkd. as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground with brass cap mkd.

T11S R6W
S18 | S17
S19 | S20
1966

Deposit the original stone alongside and raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Dependent Resurvey of T. 11 S., R. 6 W.

CHAINS

General Description

The land in Township 11 South, Range 6 West varies from level desert land in the south and west portions of the township to rolling mountains in the north and east portions. The soil is generally sandy clay in the lower regions, becoming quite rocky in the higher regions. The elevation ranges from about 5,000 to 7,000 ft. above sea level.

The vegetation in the township consists of scattered to dense juniper and pinon trees in the higher elevations and a scattered to heavy undergrowth of sagebrush and shadscale through the entire township. The only water noticed in the township was from several spring branches located in the northeast portions of the township, most of which originated outside the boundaries of the township and appeared to be intermittent streams.

There were no permanent habitations observed in the township. A considerable amount of grazing was noticed throughout the entire township.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS

NAMES	CAPACITY
Ferrel D. Reynolds	Survey Technician
Jerry L. Thomas	Survey Technician
Max Asay	Survey Aid
Merlin J. Robinson	Survey Aid
LaVern Griffin	Survey Aid


CERTIFICATE OF SURVEY

I, **Gerald W. Hochstrasser**, HEREBY CERTIFY upon honor that,
in pursuance of special instructions bearing date of the 18th day of **May**, 1965,

I have dependently resurveyed the Second Standard Parallel South along the south boundary of Township 10 South through Range 6 West, and the east boundary, portions of the south boundary and subdivisional lines and independently resurveyed the lines between secs. 3 and 4, 4 and 5, and 5 and 6 in T. 11 S., R. 6 W.

of the **Salt Lake** Meridian, in the State of **Utah**, which
are represented in the foregoing field notes as having been executed by me and under my direction;
and that said survey has been made in strict conformity with said special instructions, the Manual
of Instructions for the Survey of the Public Lands of the United States, and in specific manner
described in the foregoing field notes.

April 24, 1967
(Date)

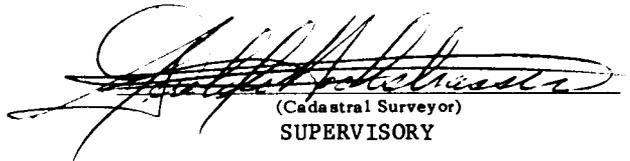
(Cadastral Surveyor)
SUPERVISORY

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

SUBMITTED FOR APPROVAL
Date MAR 28 1968

BUREAU OF LAND MANAGEMENT,
Washington, D. C.

The foregoing field notes of the dependent resurvey of the Second Standard Parallel South along the south boundary of Township 10 South through Range 6 West, and the east boundary, portions of the south boundary and subdivisional lines and the independent resurvey of the lines between secs. 3 and 4, 4 and 5, and 5 and 6, in T. 11 S., R. 6 W., Salt Lake Meridian, Utah

executed by **Gerald W. Hochstrasser**, Supervisory Cadastral Surveyor
having been critically examined and found correct, are hereby approved.

AUG 2 1968
(Date)


(Chief, Division of Engineering)

CERTIFICATE OF TRANSCRIPT

, is a true copy of the original field notes.

Blank

Page

Blank

Page

68 JUL 15 AM 10:11

ORIGINAL

FIELD NOTES

DEPT. OF INTERIOR OF THE
BUR. OF LAND MGMT.
DEPENDENT RESURVEY

DEPT. OF INTERIOR
BUR. OF LAND MGMT.

OF

THE NORTH AND WEST BOUNDARIES

A PORTION OF

THE SOUTH AND EAST BOUNDARIES

A PORTION OF

THE SUBDIVISIONAL LINES

AND

THE SURVEY OF A PORTION OF

THE EAST BOUNDARY

AND

A PORTION OF THE SUBDIVISIONAL LINES

OF

TOWNSHIP 9 SOUTH, RANGE 7 WEST

Of the SALT LAKE Meridian,

In the State of UTAH

EXECUTED BY

GLEN B. HATCH

SUPERVISORY CADASTRAL SURVEYOR

Under special instructions dated MAY 18, 19 65, which provided for the surveys

included under Group Number 470, approved MAY 20, 1965,

and assignment instructions dated MAY 21, 19 65.

Survey commenced SEPTEMBER 1, 19 65

Survey completed MAY 9, 19 66

INDEX DIAGRAM

Township 9 SOUTH, Range 7 WEST, S. L. MER.
 19 18 17 16 15 14

7	6	68	8	54	4	38	8	42	2	40	1	26
							43		41			39
	67		67		53							
8	7	66	8	52	9	37	10		11		12	25
	65		64		51							
9	18	63	17	50	16	36	15		14		13	24
	62		62		49							
10	19	60	20	48	21	34	22		23		24	23
	59		59		47							
11	30	58	29	46	28	33	27		26		25	22
	56		55		45		32		30		28	
12	31	54	32	44	33	31	34	29	35	27	36	20
		2		3		4		5		6		

CHAINS

The south boundary of T. 9 S., R. 7 W. was surveyed by A. J. Stewart Jr., in 1872 and in 1933 Ralph Gentry re-surveyed the west 1 mile of this boundary. The west and north boundaries were surveyed by A. J. Stewart Jr. in 1872 and in 1915 Miller and Hayes, retraced the east 2 miles and amended the east mile of the north boundary in 1917. The south 2 miles of the east boundary and a portion of the subdivisional lines were surveyed by A. J. Stewart Jr., in 1872. The following field notes are those of a dependent resurvey of the east 5 miles of the south boundary, the west and north boundaries, the south 2 miles of the east boundary and a portion of the subdivisional lines. The survey of the north 4 miles of the east boundary, the survey of secs. 1 and 2 and the completion of the survey of sec. 3, in T. 9 S., R. 7 W.

The resurvey and survey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1947, and the Special Instructions dated May 18, 1965.

Before restoring the corners, the lines of the original survey were retraced, and a diligent search made for any evidence of the original corners, bearing trees, and other calls of the original field note record. When duly identified the corner positions were remonumented.

The rules of proportionate measurement were applied in order to ascertain the position of lost corners, after completing the necessary retracements to connect with the identified corner locations, but not until exhausting every reasonable possibility of finding direct evidence for the control of each particular corner.

The direction of the lines of this resurvey and survey were determined by the solar transit method.

The length of the lines were determined by chaining, where the lines were accessible; lines inaccessible run by traverses and triangulation methods. Distances to topography on lines run by traverse and triangulation methods are approximate as scaled from a reliable U.S.G.S topographic sheet, the details of such triangulations or traverses have been thoroughly checked and verified and in order to simplify the record the diagrams and reductions are omitted from these field notes.

The geographic position for the southeast corner of the township is at Latitude 39° 59' 00" N. and Longitude 112° 34' 18" W., as scaled from a U. S. Forest Service planimetric map.

The magnetic declination was read at a number of stations throughout the survey and the average of the several readings was found to be N. 16° 15' E.

Dependent Resurvey of a Portion of the
S. Bdy. of T. 9 S., R. 7 W.

Reestablishment of the Survey Executed
by A. J. Stewart Jr. in 1872.

Dependent Resurvey of a Portion of the S. Bdy. of T. 9 S., R. 7 W.

CHAINS

The cor. of secs. 5, 6, 31 and 32, on the S. bdy. of the Tp., monumented with an iron post, 2 ins. in diam., set, mkd., and witnessed as described in the official record.

East, bet. secs. 5 and 32.

Over mountainous land, through dense timber and medium dense undergrowth; desc. 180 ft. over SE. slope.

31.30 Trail road in bottom of draw, drains NE.; asc. 110 ft. over NW. slope.

36.00 Low spur, projects SW.; desc. 15 ft. over E. slope.

39.74 The 1/4 sec. cor. of secs. 5 and 32, monumented with a limestone 14x12x10 ins. firmly set in the ground and mkd. 1/4 on the N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.

T9S R7W

½ S32
S5

T10S

1965

Set a cedar post, 7 ft. long, 5 ins. in diam., 24 ins. in the ground alongside the iron post.

Bury the original cor. alongside the iron post.

S. 89° 31' E., beginning new measurement.

Over nearly level land.

12.68 Fence, barbed wire, bears N. 36° E. and S. 36° W. and W.

13.60 Top of low rise; desc. 185 ft. over a SE. slope.

32.40 Draw, drains NE.; asc. 10 ft. over a W. slope.

40.45 The cor. of secs. 4, 5, 32 and 33, monumented with a sandstone, 18x9x8 ins., firmly set in the ground, and mkd. with 4 notches on the E. and 2 notches on the W. edges. This cor. is set at the cor. of fences bearing N., S., and W.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 20 ins. in the ground and in a collar of stone, with brass cap mkd.

T9S R7W

S32 | S33
S5 | S4

T10S

1965

Dependent Resurvey of a Portion of the S. Bdy. of T. 9 S., R. 7 W.

CHAINS

Bury the original cor. alongside the iron post.

Land, rolling hills.

Soil, rocky clay.

Timber, medium dense juniper.

Undergrowth, dense sagebrush, scattered patches of oak.

N. 89°09' E., bet. secs. 4 and 33.

Over rolling land, through scattered timber and dense undergrowth, asc. 35 ft. over W. slope.

- 13.10 Trail road, bears N. 50° E. and S. 50° W.
- 14.20 Low spur, projects N. 15° E.; desc. 60 ft. over E. slope.
- 23.20 Leave timber, enter dense undergrowth; desc. 55 ft. over E. slope.
- 40.23 The 1/4 sec. cor. of secs. 4 and 33, monumented with a granite stone; 16x9x7 ins., firmly set in the ground, and mkd. 1/4 on the N. face.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

T9S R7W

½ $\frac{S33}{S4}$

T10S

1965

Set a cedar post, 7 ft. long, 5 ins. in diam., 24 ins. in the ground, on the N. side of the iron post.

Bury the original cor. alongside the iron post.

S. 89° 53' E., beginning new measurement.

Over gently rolling land.

- 7.30 Trail road, bears irregularly N. and S.
- 8.60 Trail road, bears N. 20° E. and S. 20° W.
- 10.60 Small stream, 2 ins. deep, 18 ins. wide, flows N. 15° E.
- 17.00 Low spur, projects N.; desc. 30 ft. over E. slope.
- 22.50 Wash, 6 ft. deep, 70 lks. wide, drains N. 40° W.
- 26.65 Trail road, bears N. 42° W. and S. 42° E.
- 31.10 Enter medium dense timber.

Dependent Resurvey of a Portion of the S. Bdy. of T. 9 S., R. 7 W
CHAINS

- 37.50 Wash, 2 ft. deep, 40 lks. wide, drains S. 40° W.
38.29 Barbed wire fence, bears N. 50° W. and S. 50° E.
40.14 Point for the cor. of secs. 3, 4, 33 and 34, at proportionate distance; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. in diam., 18 ins. in the ground, to solid rock and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T9S R7W

$\frac{S33}{S4} | \frac{S34}{S3}$

T10S

1965

from which

A juniper, 8 ins. in diam., bears N. 0° 30' W., 81 lks. dist., mkd. T. 9 S., R. 7 W. S33 BT.

Land, gently rolling.

Soil, rocky clay.

Timber, widely scattered, to dense juniper.

Undergrowth, medium dense sagebrush.

S. 89° 53' E., bet. secs. 3 and 34.

Over rolling mountainous land, through medium dense timber and undergrowth.

- .56 Bladed dirt road, bears irregularly N. and S.; asc. 40 ft. over W. slope.
5.50 Trail road, bears S. and N., curving to the NE.; asc. 95 ft. over W. slope.
40.14 Point for the 1/4 sec. cor. of secs. 3 and 34, at proportionate distance; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. in diam., 18 ins. in the ground, to solid rock and in a mound of stone to top, with brass cap mkd.

T9S R7W

$\frac{1}{4} \frac{S34}{S3}$

T10S

1965

from which

A juniper 6 ins. in diam., bears S. 23° W., 26 lks. dist., mkd. 1/4 S BT.

- 48.10 Small ravine, drains S. 70° W.; asc. 115 ft. over NW. slope.

Dependent Resurvey of a Portion of the S. Bdy. of T. 9 S., R. 7 W.

CHAINS

74.60 Timber becomes scattered; asc. 25 ft. over W. slope.

80.28 The cor. of secs. 2, 3, 34 and 35, monumented with a flint stone, 18x12x6 ins., firmly set in the ground and mkd. with 2 notches on the E. and 4 notches on the W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 18 ins. in the ground, to solid rock and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T9S R7W

$$\begin{array}{r} \underline{S34} \quad \underline{S35} \\ S3 \quad S2 \end{array}$$

T10S

1965

Bury the original cor. alongside the iron post.

Land, rolling mountainous.

Soil, rocky clay.

Timber, dense to scattered juniper.

Undergrowth, dense sagebrush.

N. 89° 20' E., bet. secs. 2 and 35.

Over gently rolling mountainous land, through scattered timber; asc. 25 ft. over W. slope.

8.00 Trail road, bears N. 80° W. and S. 80° E.; asc. 65 ft. over W. slope.

39.00 Small ravine, drains N. 80° W.; asc. 15 ft. over W. slope.

40.02 Point for the 1/4 sec. cor. of secs. 2 and 35 at proportionate distance; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. in diam., 16 ins. in the ground, to solid rock and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T9S R7W

$$\frac{1}{4} \frac{\underline{S35}}{S2}$$

T10S

1965

Continue over rolling hills; asc. 165 ft. over W. slope.

72.61 Fence, bears N. and S.; asc. 35 ft. over W. slope.

80.04 The cor. of secs. 1, 2, 35 and 36, monumented with a sandstone, 19x13x4 ins., firmly set in the ground and mkd. with 1 notch on the E. and 5 notches on the W. edges.

Dependent Resurvey of a Portion of the S. Bdy. of T. 9 S., R. 7

CHAINS

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins. in the ground and in a collar of stone, with brass cap mkd.

T9S R7W

S35 | S36

S2 | S1

T10S

1965

Bury the original cor. alongside the iron post.

Land, rolling mountainous.
Soil, rocky clay.
Timber, scattered juniper.
Undergrowth, dense sagebrush.

N. $88^{\circ} 58'$ E., bet. secs. 1 and 36.

Over rolling mountainous land, through scattered timber and dense undergrowth; asc. 200 ft. over W. slope.

40.20 Point for the $\frac{1}{4}$ sec. cor. of secs. 1 and 36, at proportionate distance; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins. in the ground, with brass cap mkd.

T9S R7W

$\frac{1}{2}$ S36

S1

T10S

1965

Raise a mound of stone 3 ft. base, $2\frac{1}{2}$ ft. high N. of the cor.

Asc. gradually over rolling NW. slope.

52.55 Trail road, bears N. 75° W. and S. 75° E.

54.90 Irrigation ditch, drains N. 75° W.

68.40 Top of rise; desc. gradual SE. slope.

70.80 Recross irrigation ditch, drains S. 28° W.

76.50 Recross irrigation ditch, drains N. 54° W.

80.20 Trail road, bears N. 15° E. and S. 15° W.

80.40 The cor. of Tps. 9 and 10 S., Rs. 6 and 7 W., monumented with a granite stone, $20 \times 12 \times 6$ ins., set in a mound of stone and mkd. with 6 notches on all 4 edges.

At the cor. point

Dependent Resurvey of a Portion of the S. Bdy. of T. 9 S., R. 7 W.

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins. in the ground, with brass cap mkd.

T9S
R7W R6W
S36 | S31
S1 | S6
T10S
R7W R6W
1965

Raise a mound of stone, 3 ft. base, $2\frac{1}{2}$ ft. high N. of the cor.

Bury the original cor. alongside the iron post.

Land, gently rolling mountains.

Soil, rocky clay.

Timber, scattered juniper.

Undergrowth, medium dense sagebrush, grass and weeds.

Dependent Resurvey of the W. Bdy. of T. 9 S., R. 7 W.

Reestablishment of the Survey Executed by
A. J. Stewart Jr. in 1872.

From the cor. of Tps. 8 and 9 S., Rs. 7 and 8 W., monumented with an iron post, 3 ins. in diam., conforming to the official record.

S. $0^{\circ} 13'$ E., bet. secs. 1 and 6,

Over nearly level desert land; asc. 15 ft. over gradual N. slope.

19.60 Wash, 3 ft. deep, 20 lks. wide, drains N. 40° W.; asc. 15 ft. over gentle N. slope.

40.02 Point for the $\frac{1}{4}$ sec. cor. of secs. 1 and 6, at proportionate distance, the original cor. a sandstone, $14 \times 8 \times 6$ ins. was found lying loose on the ground and the original cor. position could not be identified.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins. in the ground and in a collar of stone, with brass cap mkd.

T9S
R8W R7W
 $\frac{1}{2}$
S1 | S6
1965

Bury the original cor. alongside the iron post.

42.80 Wash, 3 ft. deep, 30 lks. wide, drains N. 40° W., asc. 80 ft. over gentle N. slope.

Dependent Resurvey of the W. Bdy. of T. 9 S., R. 7 W.

CHAINS

80.04 Point for the cor. of secs. 1, 6, 7 and 12; at proportionate distance; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins. in the ground, with brass cap mkd.

T9S
R8W R7W
S1|S6
S12|S7
1965

Raise a mound of stone, $3\frac{1}{2}$ ft. base, 2 ft. high W. of the cor.

Land, gently sloping bench.

Soil, rocky, sandy clay.

No timber.

Undergrowth, medium dense sagebrush, grass and weeds.

S. $0^{\circ} 13'$ E., bet. secs. 7 and 12.

Over nearly level desert bench land, through medium dense undergrowth.

4.18 Barbed wire fence, bears N. 40° E. and S. 40° W.

6.10 Wash, 6 ft. deep, 20 lks. wide, drains N. 10° W.

36.50 Junction of bulldozed road, bears N. 25° E., S. 50° W. and S. 5° E.

40.02 The $\frac{1}{4}$ sec. cor. of secs. 7 and 12, monumented with a limestone, $18 \times 10 \times 4$ ins., firmly set in the ground and mkd. $\frac{1}{4}$ on the W. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins. in the ground and in a collar of stone, with brass cap mkd.

T9S
R8W R7W
 $\frac{1}{2}$
S12|S7
1966

Bury the original cor. alongside the iron post.

S. $0^{\circ} 06'$ E., beginning new measurement.

Over desert land; asc. 45 ft. over gentle N. slope.

20.70 Junction of bulldozed road, bears N. 03° E., S. 15° E. and S. 30° W.; asc. 50 ft. over gentle N. slope.

CHAINS

39.96

The cor. of secs. 7, 12, 13 and 18, monumented with a granite stone, 12x8x6 ins., firmly set in the ground and mkd. with 2 notches on the N. and 4 notches on the S. edges, (record reports a sandstone 18x9x8 ins.).

At the corner point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground and in a collar of stone, with brass cap mkd.

T9S
R8W R7W
S12 | S7
S13 | S18
1966

Bury the original cor. alongside the iron post.

Land, gently rolling desert.

Soil, rocky clay.

No timber.

Undergrowth, medium shadscale, sagebrush and grass.

S. 0° 13' E., bet. secs. 13 and 18.

Over desert mountain land, through dense undergrowth; asc. 40 ft. over gentle NE. slope.

6.40

Unimproved dirt road, bears irregularly NE. and SW., enter dense timber; asc. 70 ft. over NE. slope.

40.41

The 1/4 sec. cor. of secs. 13 and 18, monumented with a sandstone, 20x8x6 ins., firmly set in the ground and mkd. 1/4 on the W. face (record reports a sandstone, 18x14x12 ins.). No remaining evidence of the original bearing trees was found.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground and in a collar of stone, with brass cap mkd.

T9S
R8W R7W
½
S13 | S18
1966

Bury the original cor. alongside the iron post.

S. 0° 09' E., beginning new measurement.

Dependent Resurvey of the W. Bdy. of T. 9 S. R. 7 W.

CHAINS

Over gently rolling desert mountain land; asc. 150 ft. over NE. slope, through dense to scattered timber and dense undergrowth.

37.20 Wash, 2 ft. deep, 20 lks. wide, drains N. 40° E.

40.16 The cor. of secs. 13, 18, 19 and 24, monumented with a flint stone, 18x13x4 ins., firmly set in the ground and mkd. with 3 notches on the N. and S. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 18 ins. in the ground, to solid rock and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T9S
R8W R7W
S13 | S18
S24 | S19
1966

Bury the original cor. alongside the iron post.

Land, gently rolling mountains.

Soil, rocky clay.

Timber, dense to scattered juniper.

Undergrowth, medium dense shadscale, sagebrush and grass.

S. 0° 12' E., bet. secs. 19 and 24.

Over gently rolling mountain land, through dense timber and scattered undergrowth; asc. 145 ft. over NE. slope.

35.70 Spur, projects NE.; desc. 5 ft. over SE. slope.

40.08 The 1/4 sec. cor. of secs. 19 and 24, monumented with a sandstone, 16x8x4 ins., firmly set in the ground and mkd. 1/4 on the W. face. No trace of the original bearing tree was found.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 18 ins. in the ground, to solid rock and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T9S
R8W R7W
 $\frac{1}{2}$
S24 | S19
1966

Bury the original cor. alongside the iron post.

S. 0° 26' E., beginning new measurement.

Dependent Resurvey of the W. Bdy. of T. 9 S., R. 7 W.

CHAINS	
	Over mountainous land, through scattered to dense timber.
.50	Small swale drains E.; asc. 30 ft. over N. slope.
3.00	Spur, projects NE., desc. 50 ft. over SE. slope.
8.80	Draw, drains N. 45° E.; asc. 95 ft. over NW. slope, along a fence line.
20.41	Cor. of barbed wire fences, bears N., S., E. and W.; asc. 50 ft. over NW. slope.
28.60	Spur, projects N. 20° E.; desc. 35 ft. over SE. slope.
35.60	Draw, drains NE.; asc. 40 ft. over N. slope.
39.98	The cor. of secs. 19, 24, 25 and 30, monumented with a sandstone, 16x8x4 ins., firmly set in the ground and mkd. with 2 notches on the S. and 4 notches on the N. edge. No trace of the original bearing tree was found.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. in diam., 16 ins. in the ground, to solid rock and in a mound of stone, 4 ft. base to top, with brass cap mkd.
	T9S R8W R7W <u>S24 S19</u> <u>S25 S30</u> 1965
	Bury the original cor. alongside the iron post.
	Land, rolling mountains. Soil, rocky clay. Timber, dense to scattered juniper. Undergrowth, medium sagebrush and grass.
	S. 0° 06' W., bet. secs. 25 and 30.
	Over desert mountain land, through medium dense timber and undergrowth; asc. 20 ft. over NW. slope.
.60	Spur, projects NE., desc. 45 ft. over SE. slope.
5.50	Draw, drains N. 45° E.; asc. 40 ft. over NW. slope.
11.60	Spur, projects NE.; desc. 45 ft. over SE. slope.
19.90	Draw, drains NE.; asc. 155 ft. over NW. slope.
40.01	The 1/4 sec. cor. of secs. 25 and 30, monumented with a limestone, 12x10x8 ins. firmly set in the ground and mkd. 1/4 on the W. face (record reports a limestone 14x13x4 ins.).

Dependent Resurvey of the W. Bdy. of T. 9 S., R. 7 W.

CHAINS

At the corner point

Set an iron post, 30 ins. long, 2½ ins. in diam., 16 ins. in the ground, to solid rock and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T9S
R8W R7W
½
S25|S30
1965

Bury the original cor. alongside the iron post.

South, beginning new measurement.

Continue over mountainous land; asc. 100 ft. over NW. slope, along a fence line.

16.60 Spur, projects N. 40° E.; desc. 40 ft. over SE. slope.

22.50 Draw, drains E.; asc. 90 ft. over NW. slope.

38.30 Spur, projects N. 45° E.

39.93 The cor. of secs. 25, 30, 31 and 36, monumented with a flintstone, 18x11x6 ins. firmly set in a mound of stone, and mkd. with 1 notch on the S. and 5 notches on the N. edge.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 20 ins. in the ground and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T9S
R8W R7W
S25|S30
S36|S31
1965

Bury the original cor. alongside the iron post.

The above cor. is set in a barbed wire fence bearing irregularly N. and S.

Land, rolling mountains.
Soil, rocky clay.
Timber, dense to scattered juniper.
Undergrowth, medium sagebrush and grass.

S. 1° 42' W., bet. secs. 31 and 36.

Over mountainous land, through medium dense timber and undergrowth; desc. 40 ft. over SE. slope, along a barbed wire fence.

Dependent Resurvey of the W. Bdy. of T. 9 S., R. 7 W.

CHAINS

- 2.80 Draw, drains N. 70° E.; asc. 160 ft. over N. slope.
- 13.30 Spur, projects E.; desc. 60 ft. over S. slope.
- 23.50 Draw, drains E.; asc. 75 ft. over N. slope.
- 27.70 Top of rise; desc. 40 ft. over SE. slope.
- 39.02 The 1/4 sec. cor. of secs. 31 and 36, monumented with a flintstone, 14x13x12 ins., firmly set in a mound of stone, and mkd. 1/4 on the W. face.
- At the cor. point
- Set an iron post, 30 ins. long, 2½ ins. in diam., 26 ins. in the ground, with brass cap mkd.
- T9S
R8W R7W
½
S36 | S31
1965
- Bury the original cor. alongside the iron post.
- The above cor. is set at the cor. of fences bearing N. and E.
-
- S. 0° 13' E., beginning new measurement.
- Over mountainous land, through scattered timber and dense undergrowth.
- .20 Unimproved dirt road, bears E. and W.; desc. 30 ft. over S. slope.
- 3.60 West fork of Government Creek, dry, drains E.; asc. 420 ft. over N. slope.
- 23.70 Spur, projects N. 60° E.; desc. 50 ft. over SE. slope.
- 37.60 Draw, drains NE.; asc. 85 ft. over NW. slope.
- 42.14 The cor. of secs. 31 and 36, on the S. bdy. of the Tp., monumented with an iron post, 3 ins. in diam., conforming to the record.
- Land, mountainous.
Soil, rocky clay.
Timber, dense to scattered juniper the first one half mile, widely scattered juniper the balance.
Undergrowth, medium dense sagebrush and oak.

Dependent Resurvey of the N. Bdy. of T. 9 S., R. 7 W.

Reestablishment of the Survey Executed by A. J. Stewart Jr. in 1872 and Resurveyed by Miller and Hayes, in 1915 and Amended by Miller in 1917.

Dependent Resurvey of the N. Bdy. of T. 9 S., R. 7 W.

CHAINS

From the closing cor. of secs. 31 and 36, T. 8 S., Rs. 6 and 7 W., monumented with an iron post, 3 ins. in diam. conforming to the record.

N. 88° 41' W., along the S. bdy. of sec. 36, T. 8 S., R. 7 W.

Over mountainous land, through dense timber and undergrowth.

- 1.99 Point for the closing cor. of Tp. 9 S., Rs. 6 and 7 W., hereinafter described.
- 5.33 The cor. of T. 9 S., Rs. 6 and 7 W., monumented with an iron post, 3 ins. in diam., conforming to the official record. I remark this cor. to function as an angle point only.
- Thence, N. 89° 45' W., beginning new measurement.
- Desc. 120 ft. over W. slope.
- 7.30 Draw, drains N. 40° W.; asc. 70 ft. over E. slope.
- 11.30 Spur, projects N.; desc. 130 ft. over W. slope.
- 17.10 Draw, drains irregularly N.; asc. 155 ft. over E. slope.
- 25.80 Spur, projects N. 10° W.; desc. 160 ft. over W. slope.
- 33.50 Draw, drains N. 30° W.; asc. 50 ft. over E. slope.
- 36.68 Point for the 1/4 sec. cor. of sec. 1, hereinafter described; asc. 60 ft. over E. slope.
- 39.79 The 1/4 sec. cor. of secs. 1 and 36, monumented with an iron post, 1 in. in diam., conforming to the record, I remark this cor. to refer to sec. 36, T. 8 S., R. 7 W., only.
- S. 89° 38' W., beginning new measurement.
- Over mountainous land, through dense timber and undergrowth; asc. 15 ft. over E. slope.
- 1.40 Spur, projects N.; desc. 110 ft. over W. slope.
- 8.50 Draw, drains irregularly N.; asc. 80 ft. over E. slope.
- 13.20 Spur, projects N. 30° E.; desc. 160 ft. over W. slope.
- 20.80 Draw, drains N. 30° W.; asc. 150 ft. over E. slope.
- 26.00 Trail road, on top of ridge, bears N. 30° W. and S. 30° E.; desc. 150 ft. over S. slope.
- 36.70 Swale, drains SW.; asc. 10 ft. over SE. slope.
- 36.91 Point for the closing cor. of secs. 1 and 2, T. 9 S., R. 7 W., hereinafter described.
- 38.42 The cor. of secs. 1, 2, 35 and 36, monumented with an iron post, 3 ins. in diam., conforming to the record. I remark this cor. to refer to secs. 35 and 36, T. 8 S., R. 7 W., only.

Dependent Resurvey of the N. Bdy. of T. 9 S., R. 7 W.

CHAINS

Land, mountainous.
Soil, rocky clay.
Timber, medium dense juniper and pinon.
Undergrowth, medium dense sagebrush, oak and mahogany.

Reestablishment of the Survey Executed by A. J. Stewart Jr. in 1872 and Retraced by Miller and Hayes, in 1915.

S. 89° 05' W., along the S. bdy. of sec. 35, T. 8 S., R. 7 W.

Over mountainous land, through dense timber and medium dense undergrowth; asc. 45 ft. over SE. slope.

- 2.80 Spur, projects S.; desc. 175 ft. over NW. slope.
- 23.30 Wash, 2 ft. deep, 30 lks. wide, drains N. 75° W.; desc. 55 ft. over NW. slope.
- 37.79 The 1/4 sec. cor. of secs. 2 and 35, monumented with a granite stone, 14x10x8 ins. firmly set in the ground and mkd. 1/4 on the N. face, (record reports a limestone 18x10x7 ins.). This cor. will now refer to sec. 35, T. 8 S., R. 7 W. only.
- At the cor. point
- Set an iron post, 30 ins. long, 2½ ins. in diam., 20 ins. in the ground, and in a mound of stone, 3 ft. base to top with brass cap mkd.
- T8S R7W
½ S35
1966
- Bury the original cor. alongside the iron post.
- N. 89° 45' W., beginning new measurement.
- Over mountainous land, through dense timber and medium dense undergrowth; desc. 90 ft. over NW. slope.
- .75 Point for the 1/4 sec. cor. of sec. 2, hereinafter described.
- 14.10 Bladed dirt road, bears N. 65° E. and S. 45° W.; desc. 20 ft. over NW. slope.
- 17.20 Wash, 3 ft. deep, 30 lks. wide, drains S. 30° W.; asc. 30 ft. over SE. slope.
- 18.90 S. point of low spur; desc. 40 ft. over gentle W. slope.
- 30.90 Wash, 2 ft. deep, 40 lks. wide, drains S. 40° W.; asc. 25 ft. over SE. slope.

Dependent Resurvey of the N. Bdy. of T. 9 S., R. 7 W.

CHAINS

- 34.50 Top of rise; desc. 50 ft. over SW. slope.
- 39.63 The cor. of secs. 2, 3, 34 and 35, monumented with a flintstone, 36x18x15 ins., firmly set in the ground and mkd. with 2 notches on the E. and 4 notches on the W. edges. This cor. will now refer to secs. 34 and 35, T. 8 S., R. 7 W., only.
- At the cor. point
- Set an iron post, 30 ins. long, 2½ ins. in diam., 12 ins. in the ground, to solid rock and in a mound of stone, 5 ft. base to top, with brass cap mkd.
- T8S R7W
S34|S35
 S2
 T9S R7W
 1965
- Deposit the original cor. in the mound alongside the iron post.
- Land, mountainous.
 Soil, rocky clay.
 Timber, medium dense juniper and pinon.
 Undergrowth, medium dense shadscale and sagebrush.
-
- Reestablishment of the Survey Executed
 by A. J. Stewart in 1872.
-
- West along the S. bdy. of sec. 34, T. 8 S., R. 7 W.
- Over mountainous land, through dense timber and undergrowth; desc. 10 ft. over SW. slope.
- 1.17 Point for the closing cor. of secs. 2 and 3, hereinafter described.
- Thence bet. secs. 3 and 34; desc. 90 ft. over SW. slope.
- 10.50 Wash, 2 ft. deep, 40 lks. wide, drains N. 80° W.
- 13.80 Recross wash, drains S. 80° W; asc. 15 ft. over E. slope.
- 20.80 Top of rise; desc. 65 ft. over gentle W. slope.
- 39.79 The 1/4 sec. cor. of secs. 3 and 34, monumented with a limestone, 14x10x8 ins., firmly set in the ground and mkd. 1/4 on the N. face.
- At the corner point
- Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground and in a collar of stone, with brass cap mkd.

Dependent Resurvey of the N. Bdy. of T. 9 S., R. 7 W.

CHAINS

T8S R7W

 $\frac{1}{2} \frac{S34}{S3}$

T9S

1965

from which

A juniper, 8 ins. in diam., bears S. 32° W. 38 lks. dist., mkd. 1/4 S3 BT.

Bury the original cor. alongside the iron post.

N. 89° 58' W., beginning new measurement.

Over rolling land, through dense timber, and scattered undergrowth; desc. 90 ft. over W. slope.

26.00 Wash, 4 ft. deep, 40 lks. wide, drains S. 60° W.

27.20 Recross wash, drains N. 45° W.; desc. 85 ft. over W. slope.

34.40 Wash, 5 ft. deep, 30 lks. wide, drains N. 45° W.

39.99 The cor. of secs. 3, 4, 33 and 34, monumented with a limestone, 14x8x8 ins., firmly set in the ground and mkd. with 3 notches on the E. and W. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 20 ins. in the ground and in a collar of stone, with brass cap mkd.

T8S R7W

 $\frac{S33|S34}{S4|S3}$

T9S

1965

from which

A juniper, 8 ins. in diam., bears S. 39° W., 99 lks. dist., mkd. S4 BT.

A juniper, 8 ins. in diam., bears N. 11° W., 34 lks. dist., mkd. S33 BT.

Bury the original cor. alongside the iron post.

Land, gently rolling bench land.

Soil, rocky clay.

Timber, dense juniper.

Undergrowth, medium dense sagebrush and grass.

S. 89° 56' W., bet. secs. 4 and 33.

Dependent Resurvey of the N. Bdy. of T. 9 S., R. 7 W.

CHAINS

- Over desert bench land, through dense timber and scattered undergrowth; desc. 50 ft. over gentle W. slope.
- 20.30 Bulldozed road, bears irregularly N. and S.; desc. 60 ft. over gentle W. slope.
- 40.48 The 1/4 sec. cor. of secs. 4 and 33, monumented with a limestone, 18x7x6 ins., firmly set in the ground and mkd. 1/4 on the N. face. No trace of the original bearing trees was found.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. in diam., 20 ins. in the ground and in a collar of stone, with brass cap mkd.

T8S R7W

¼ S33
S4

T9S R7W

1965

Bury the original cor. alongside the iron post.

S. 89° 48' W., beginning new measurement.

Over desert bench land, through dense timber and medium dense undergrowth.

- 3.70 Wash, 1½ ft. deep, 10 lks. wide, drains NW.; desc. 100 ft. over W. slope.
- 40.54 The cor. of secs. 4, 5, 32 and 33, monumented with a sandstone, 14x12x10 ins., firmly set in the ground and mkd. with 4 notches on the E. and 2 notches on the W. edges (record reports a limestone 20x8x6 ins.).

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 16 ins. in the ground, to solid rock and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T8S R7W

S32 | S33
S5 | S4

T9S R7W

1965

Set a steel fence post, 1 ft. E. of the cor.

Bury the original cor. alongside the iron post.

Land, desert bench.

Soil, rocky, sandy, clay.

Timber, dense to scattered juniper.

Undergrowth, dense to scattered sagebrush.

S. 89° 54' W., bet. secs. 5 and 32.

Dependent Resurvey of the N. Bdy. of T. 9 S., R. 7 W.

CHAINS	
14.20	Over desert bench land, through medium dense timber and undergrowth; desc. 40 ft. over W. slope. Dirt road, bears irregularly NW. and SE.; desc. 20 ft. over W. slope.
23.20	Wash, 4 ft. deep, 40 lks. wide, drains NW.; desc. 40 ft. over W. slope.
37.66	Center of gravel road, bears irregularly N. and S.
40.46	Point for the 1/4 sec. cor. of secs. 5 and 32, at proportionate distance; there is no remaining evidence of the original cor.
	Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground and in a collar of stone, with brass cap mkd.
	T8S R7W
	¼ — $\frac{S32}{S5}$
	T9S R7W
	1965
	Desc. 45 ft. over gentle W. slope.
54.00	Wash, 2 ft. deep, 30 lks. wide, drains N. 40° W.; desc. 60 ft. over gentle W. slope.
80.92	The cor. of secs. 5, 6, 31 and 32, monumented with a limestone, 12x10x6 ins., firmly set in the ground and mkd. with 5 notches on the E. and 1 notch on the W. edges (record reports a limestone 14x12x10 ins).
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.
	T8S R7W
	$\frac{S31}{S6} \frac{S32}{S5}$
	T9S R7W
	1965
	Bury the original cor. alongside the iron post.
	Land, gentle rolling desert bench. Soil, sandy clay. Timber, scattered to medium dense scrub juniper. Undergrowth, medium dense sagebrush.
	S. 89° 47' W., bet. secs. 6 and 31.
	Over gently rolling desert land, through medium dense undergrowth; desc. 65 ft. over gentle W. slope.
31.80	Wash, 6 ft. deep, 20 lks. wide, drains N. 50° W.

Dependent Resurvey of the N. Bdy. of T. 9 S., R. 7 W.

CHAINS

40.10 The 1/4 sec. cor. of secs. 6 and 31, monumented with a limestone, 18x10x8 ins., firmly set in the ground and mkd. 1/4 on the N. face.

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. in diam., 24 ins in the ground, with brass cap mkd.

T8S R7W
1/4 S31
S6
T9S R7W
1965

Bury the original cor. alongside the iron post.

S. 89° 47' W., beginning new measurement.

Over desert bench land, through medium dense undergrowth desc. 20 ft. over gentle W. slope.

18.70 Wash, 12 ft. deep, 100 lks. wide, drains N. 45° W.; thence over level land.

21.60 Dirt road, bears N. 45° W. and S. 45° E. irregularly.

40.13 The cor. of Tps. 8 and 9 S., Rs. 7 and 8 W., previously described.

Land, nearly level desert.
Soil, sandy clay.
No timber.
Undergrowth, medium dense sagebrush, grass and weeds.

Dependent Resurvey of a Portion of the E. Bdy. of T. 9 S., R. 7 W.

Reestablishment of the survey executed by A. J. Stewart Jr. in 1872.

From the cor. of Tps. 9 and 10 S., Rs. 6 and 7 W.; previously described.

N. 0° 03' W., bet. secs. 31 and 36.

Over mountainous land, through scattered timber and medium dense undergrowth.

.80 Trail road, bears N. 15° E. and S. 15° W.; asc. 325 ft. over SW. slope.

19.40 Spur, projects W.; desc. 115 ft. over NE. slope.

Dependent Resurvey of the E. Bdy. of T. 9 S., R. 7 W.

CHAINS	
28.20	Thence across nearly level bottom land.
41.13	The 1/4 sec. cor. of secs. 31 and 36, monumented with a granite stone, 16x8x6 ins., firmly set in the ground and mkd. 1/4 on the W. face (record reports a granite 15x13x5 ins.).
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. in diam., 16 ins. in the ground, to solid rock and in a mound of stone, 5 ft. base to top, with brass cap mkd.
	T9S R7W R6W ½ S36 S31
	1966
	Bury the original cor. alongside the iron post.
	<hr style="width: 20%; margin: auto;"/> N. 0° 16' W., beginning new measurement.
	Over mountainous land, through dense undergrowth.
5.70	Draw, drains S. 70° W.; asc. 385 ft. over S. slope.
24.20	High spur, projects W.; desc. 315 ft. over N. slope.
35.80	Quakenasp draw, drains irregularly W.; asc. 40 ft. over S. slope.
40.16	The cor. of secs. 25, 30, 31 and 36, monumented with a granite stone, 16x7x5 ins., firmly set in the ground and mkd. with 1 notch on the N. and 5 notches on the S. edge.
	At the cor. point
	Set an iron post, 30 ins. long; 2½ ins. in diam., 8 ins. in the ground, to solid rock and in a mound of stone 5 ft. base to top, with brass cap mkd.
	T9S R7W R6W S25 S30 S36 S31
	1966
	Bury the original cor. in the mound alongside the iron post.
	Land, mountainous. Soil, rocky clay. Timber, widely scattered juniper. Undergrowth, medium dense oak and sagebrush.

Dependent Resurvey of a Portion of the
E. Bdy. of T. 9 S., R. 7 E.

CHAINS

N. 0° 02' E., bet. secs. 25 and 30.

Over mountainous land, through scattered timber and medium dense undergrowth; asc. 30 ft. over S. slope.

- 3.50 Spur, projects W.; desc. 125 ft. over NW. slope.
9.70 Cottonwood Creek, 2 inches deep, 3 lks. wide, flows irregularly W.; asc. 360 ft. over SW. slope.
24.90 Spur, projects W.; desc. 260 ft. over NW. slope.
38.52 The 1/4 sec. cor. of secs. 25 and 30, monumented with a granite stone, 14x8x7 ins., firmly set in the ground and mkd. 1/4 on the W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.

T9S
R7W R6W
½
S25|S30
1966

Bury the original cor. alongside the iron post.

North, beginning new measurement.

Over mountainous land, through dense undergrowth; desc. 25 ft. over NW. slope.

- 5.10 Small stream 1 inch deep, 2 lks. wide, in draw, flows irregularly W.; asc. 45 ft. over SW. slope.
11.00 Spur, projects W.; desc. 140 ft. over NW. slope.
19.00 Draw, drains SW.; asc. 160 ft. over SW. slope.
30.00 Spur, projects W.; desc. 175 ft. over NW. slope.
40.00 Point for the cor. of secs. 19, 24, 25 and 30, at record course and distance; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. in diam., 20 ins. in the ground and in a collar of stone, with brass cap mkd.

T9S
R7W R6W
S24|S19
S25|S30
1966

from which

A juniper 6 ins. in diam., bears S. 83° 45' E., 74 lks. dist., mkd. T9S R6W S30 BT.

Dependent Resurvey of a Portion of the E. Bdy.
of T. 9 S., R. 7 E.

CHAINS

Land, mountainous.
Soil, rocky clay.
Timber, widely scattered juniper.
Undergrowth, medium dense oak and sagebrush.

Survey of a Portion of the E. Bdy. of T. 9 S., R. 7 E.

From the cor. of secs. 19, 24, 25 and 30 on the E. bdy.
of the Tp., previously described.

North, bet. secs. 19 and 24.

Over mountainous land, through dense timber and medium
dense undergrowth; desc. 40 ft. over N. slope.

- 2.60 Seep, in bottom of draw, drains W.; asc. 195 ft. over S.
slope.
- 29.40 Spur, projects S. 65° W.; desc. 150 ft. over NW. slope.
- 40.00 Point for the 1/4 sec. cor. of secs. 19 and 24.
- Set an iron post, 30 ins. long, 2½ ins. in diam., 8 ins.
in the ground, to solid rock and in a mound of stone, 3½
ft. base to top, with brass cap mkd.
- T9S
R7W R6W
↓
S24 | S19
1965
- Trees within limits are too scrubby to mark.
- Desc. 55 ft. over N. slope.
- 41.40 Draw, drains irregularly W.; asc. 130 ft. over SW.
slope.
- 47.00 Spur, projects W., desc. 25 ft. over NW. slope.
- 53.30 Draw, drains S. 75° W.; asc. 30 ft. over S. slope.
- 57.50 Spur, projects S. 75° W.; desc. 70 ft. over NW. slope.
- 62.60 Draw, drains S. 70° W.; asc. 30 ft. over S. slope.
- 65.70 Low spur, projects S. 70° W.; desc. 60 ft. over NW.
slope.
- 70.10 Draw, drains S. 45° W.; asc. 185 ft. over S. slope.
- 80.00 Point for the cor. of secs. 13, 18, 19 and 24.

At the base of a 3 ft. high ledge facing south set an
iron post, 30 ins. long, 2½ ins. in diam., 4 ins. in
the ground, to solid rock and in a mound of stone, 4 ft.
base to top, with brass cap mkd.

Survey of a Portion of the E. Bdy. of T. 9 S., R. 7 W.

CHAINS

T9S
R7W R6W
S13|S18
S24|S19
1965

I cut an X (cross) 6 ins. long, 1/2 in. deep, on the S. face of a ledge, 1 lk. N. of the cor.

No suitable trees for marking, within limits.

Land, mountainous.
Soil, rocky, mountain loam.
Timber, dense to scattered juniper.
Undergrowth, medium dense oak, sagebrush and grass.

North, bet. secs. 13 and 18.

Over mountainous land, through dense timber and medium dense undergrowth; asc. 15 ft. over S. slope.

- 1.50 Spur, projects S. 15° W.; desc. 60 ft. over NW. slope.
16.40 Draw, drains S. 15° W.; 215 ft. over S. slope.
23.20 Spur, projects S. 70° W.; desc. 110 ft. over N. slope.
32.30 Draw, drains S. 45° W., about 4 chs., then curves W.; asc. 190 ft. over S. slope.
39.80 Ledge 15 ft. high, faces S.; asc. 45 ft. over S. slope.
40.00 Point for the 1/4 sec. cor. of secs. 13 and 18.

Over a cross (X) cut in solid sandstone, set an iron post 30 ins. long, 2½ ins. in diam., in a mound of stone, 5 ft. base to top, with brass cap mkd.

T9S
R7W R6W
S13|S18
1965

Trees within limits are too scrubby to mark.

Asc. 85 ft. over S. slope.

- 43.90 Spur, projects W.; desc. 70 ft. over NW. slope.
54.00 Head of draw, drains S. 70° W.; asc. 240 ft. over S. slope.
63.50 Spur ridge, bears N. 25° W.; and S. 25° E.; thence by triangulation; desc. 310 ft. over NE. slope.
80.00 Point for the cor. of secs. 7, 12, 13 and 18.
Set an iron post, 30 ins. long, 2½ ins. in diam., 8 ins. in the ground, to solid rock and in a mound of stone, 4 ft. base to top, with brass cap mkd.

Survey of a Portion of the E. Bdy. of T. 9 S., R. 7 W.

CHAINS

T9S
R7W R6WS12 S7
S13 S18

1965

from which

A mahogany 6 ins. in diam., bears N. 32° E., 31
lks. dist., mkd. S7 BT.A mahogany 10 ins. in diam., bears S. 49° W., 13
lks. dist., mkd. S13 BT.

Land, mountainous.

Soil, rocky mountain loam.

Timber, medium dense juniper and pinon, with patches of
dense mahogany.

Undergrowth, medium to scattered sagebrush, oak and grass

North, bet. secs. 7 and 12.

Over mountainous land, through medium dense timber, and
dense to scattered undergrowth; desc. 115 ft. over NE.
slope.4.00 Draw, drains irregularly E.; asc. by triangulation
approximately 500 ft. along SE. slope.

40.00 Point for the 1/4 sec. cor. of secs. 7 and 12.

Set an iron post, 30 ins. long, 2½ ins. in diam., 12 ins.
in the ground, to solid rock and in a mound of stone, 4
ft. base to top, with brass cap mkd.T9S
R7W R6WS12 S7

1965

Asc. 175 ft. over SE. slope.

4.20 Spur, ridge, bears E. and W.; by triangulation; desc.
about 500 ft. over NE. slope.

72.00 Draw, drains E.; asc. 150 ft. over S. slope.

77.40 Spur, projects irregularly E.; end of triangulation;
desc. 85 ft. over N. slope.

80.00 Point for the cor. of secs. 1, 6, 7 and 12.

Set an iron post, 30 ins. long, 2½ ins. in diam., 18 ins.
in the ground, to solid rock and in a mound of stone,
3½ ft. base to top, with brass cap mkd.T9S
R7W R6WS1 S6
S12 S7

1965

Survey of a Portion of the E. Bdy. of T. 9 S., R. 7 W.

CHAINS

from which

A pine, 18 ins. in diam., bears N. 31° 45' E., 9 lks. dist., mkd, T9S R6W S6 BT.

A pine, 10 ins. in diam., bears S. 19° E., 14 lks. dist., mkd. S7 BT.

A pine, 10 ins. in diam., bears S. 45° 45' W., 22 lks. dist., mkd. S12 BT.

Land, mountainous.

Soil, rocky clay loam.

Timber, scattered to dense pine, juniper, pinon and mahogany.

Undergrowth, scattered oak, sagebrush and grass.

North, bet. secs. 1 and 6.

Over mountainous land, through dense timber and scattered undergrowth; desc. 555 ft. over N. changing to a NE. slope.

27.90 Wash, 6 ft. deep, 70 lks. wide, drains N. 50° E.; desc. 195 ft. over NE. slope.

40.00 Point for the 1/4 sec. cor. of secs. 1 and 6.

Set an iron post, 30 ins. long, 2½ ins. in diam., 15 ins. in the ground, to solid rock and in a mound of stone, 5 ft. base to top, with brass cap mkd.

T9S
R7W R6W
½
S1|S6
1965

The above cor. is set in an E. and W. fence line, and on the N. edge of a trail road, bearing N. 80° W., and S. 80° E.

Desc. 50 ft. over NE. slope.

44.20 Wash, 4 ft. deep, 40 lks. wide, in bottom of draw, drain S. 80° E.; asc. 220 ft. over S. slope.

59.20 Spur, projects S. 50° E., desc. 140 ft. over NE. slope.

65.30 Bottom of swale, drains irregularly E.; asc. 210 ft. over SW. changing to W. slope.

80.93 Intersect the N. bdy. of the Tp.

Point for the closing cor. of Tp. 9 S., Rs. 6 and 7 W.

Set an iron post, 30 ins. long, 2½ ins. in diam., 20 ins. in the ground and in a collar of stone, with brass cap mkd.

Survey of a Portion of the E. Bdy. of T. 9 S., R. 7 W.

CHAINS

T8S R7W

S36

S1 | S6

C C

R7W R6W

1965

From point of intersection, the closing cor. of Tp. 8 S., Rs. 6 and 7 W., monumented with an iron post, 3 ins. in diam., conforming to the record, bears S. 88° 41' E., 1.99 chs. dist.

Land, broken mountains.

Soil, rocky mountain loam, with a considerable amount of exposed and broken granite stone.

Timber, medium dense pine, pinon, juniper and mahogany.

Undergrowth, scattered patches of oak and sagebrush.

Dependent Resurvey of a Portion of the
Subdivision of T. 9 S., R. 7 W.

Reestablishment of the Survey Executed by
A. J. Stewart Jr. in 1872

From the cor. of secs. 1, 2, 35 and 36, on the S. bdy. of the Tp.

N. 0° 01' W., bet. secs. 35 and 36.

Over rolling bench land, through dense undergrowth; desc. 25 ft. over NW. slope.

5.30 Irrigation ditch, drains N. 80° W.; desc. 120 ft. over NW. slope.

21.10 Draw, drains W.; asc. 195 ft. over S. slope.

40.91 The 1/4 sec. cor. of secs. 35 and 36; monumented with a granite stone, 24x16x10 ins., firmly set in the ground and mkd. 1/4 on the W. face. (Record reports a blue limestone 17x11x7 ins.)

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground and in a collar of stone, with brass cap mkd.

T9S R7W

½

S35 | S36

1965

Bury the original cor. alongside the iron post.

N. 1° 57' W., beginning new measurement.

Dependent Resurvey of a Portion of the Subdivision
of T. 9 S., R. 7 W.

CHAINS

- Over rolling land, through dense undergrowth; asc. 50 ft over S. slope.
- 12.60 Top of rise; desc. 75 ft. over N. slope.
- 21.50 Wash, 3 ft. deep, 40 lks. wide, drains N. 65° W.; asc. 110 ft. over S. slope.
- 34.70 Top of rise; desc. 20 ft. along SW. slope.
- 39.26 The cor. of secs. 25, 26, 35 and 36, monumented with a granite stone, 18x12x8 ins., firmly set in the ground and mkd. with 1 notch on the S. and E. edges.
- At the cor. point
- Set an iron post, 30 ins. long, 2½ ins. in diam., 20 ins in the ground and in a collar of stone, with brass cap mkd.

T9S R7W

S26|S25

S35|S36

1965

Bury the original cor. alongside the iron post.

Land, rolling desert bench.
Soil, rocky, sandy clay.
Timber, widely scattered juniper.
Undergrowth, dense sagebrush, scattered grass and weeds.

From the cor. of secs. 25, 30, 31 and 36, on the E. bdy. of the Tp.

S. 89° 26' W., bet. secs. 25 and 36.

Over rolling land, through medium dense oakbrush; desc. 150 ft. over SW. slope.

- 18.30 Draw, with seep in bottom, drains SW.; asc. 65 ft. over SE. slope.
- 29.70 Spur, projects SW.; leave oakbrush, enter dense sagebrush desc. 10 ft. over W. slope.
- 40.21 The 1/4 sec. cor. of secs. 25 and 36, monumented with a granite stone, 16x7x6 ins., firmly set in the ground and mkd. 1/4 on the N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 18 ins. in the ground, to solid rock and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T9S R7W

½ S25

S36

1966

Dependent Resurvey of a Portion of the
Subdivision of T. 9 S., R. 7 W.

CHAINS

Bury the original cor. alongside the iron post.

S. 88° 10' W., beginning new measurement.

Over desert mountainous land; desc. 310 ft. over W. slope.

41.48 The cor. of secs. 25, 26, 35 and 36.

Land, desert mountain.

Soil, rocky, clay.

No timber.

Undergrowth, dense sagebrush, patches of dense oakbrush.

From the cor. of secs. 2, 3, 34 and 35, on the S. bdy. of the Tp.

N. 0° 05' W., bet. secs. 34 and 35.

Over rolling land, through widely scattered timber and dense undergrowth.

1.00 Trail road, bears N. 70° W. and S. 70° E.; desc. 25 ft. over N. slope.

13.70 Wash, 4 ft. deep, 30 lks. wide, drains irregularly W.; asc. 25 ft. over SW. slope.

18.22 Barbed wire fence, bears N. 85° W. and S. 85° E.; asc. 10 ft. over SW. slope.

23.00 Top of rise; desc. 10 ft. over N. slope.

29.18 Irrigation ditch, drains N. 80° W.; desc. 55 ft. over NW. slope.

38.75 Cor. of barbed wire fence, bears N. and W.

40.58 Point for the 1/4 sec. cor. of secs. 34 and 35, at proportionate distance; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. in diam., 22 ins. in the ground, with brass cap mkd.

T9S R7W

½

S34|S35

1966

Raise a mound of stone, 4 ft. base, 2½ ft. high W. of the cor.

Desc. 25 ft. over NW. slope.

Dependent Resurvey of a Portion of the
Subdivision of T. 9 S., R. 7 W.

CHAINS

- 45.80 Wash, 4 ft. deep, 70 lks. wide, drains N. 80° W.; asc. 95 ft. over SW. slope.
- 61.60 Trail road, bears N. 80° W. and S. 80° E.; thence over gently rolling land.
- 79.14 Barbed wire fence, bears irregularly E. and W.
- 81.16 The cor. of secs. 26, 27, 34 and 35, monumented with a granite stone, 20x16x10 ins., firmly set in the ground and mkd. with 2 notches on the E. and 1 notch on the S. edge.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 15 ins. in the ground, to solid rock and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T9S R7W

S27 | S26
S34 | S35

1966

Bury the original cor. alongside the iron post.

Land, rolling, desert mountains.

Soil, sandy clay.

Timber, scattered patches of juniper.

Undergrowth, dense sagebrush, medium grass.

From the cor. of secs. 25, 26, 35 and 36.

N. 89° 51' W., bet. secs. 26 and 35.

Over mountainous land, through widely scattered timber and dense undergrowth, desc. 55 ft. over W. slope.

- 6.01 Barbed wire fence, bears N. and S.; desc. 200 ft. over W. slope.
- 23.40 Wash, 3 ft. deep, 40 lks. wide, drains NW.; desc. 35 ft. over W. slope. Enter burned area.
- 39.40 Point for the 1/4 sec. cor. of secs. 26 and 35, at proportionate distance; there is no remaining evidence of the original cor.
- Set an iron post, 30 ins. long, 2½ ins. in diam., 20 ins. in the ground, with brass cap mkd.
- T9S R7W
- ½ S26
S35
- 1966
- Raise a mound of stone, 4 ft. base, 2½ ft. high N. of the cor.
- Desc. 150 ft. over W. slope.
- 63.80 Leave burned area; enter dense juniper; desc. 40 ft. over W. slope.

Dependent Resurvey of a Portion of the
Subdivision of T. 9 S., R. 7 W.

CHAINS

78.80 The cor. of secs. 26, 27, 34 and 35.

Land, desert mountains.
Soil, rocky, clay loam.
Timber, scattered to dense juniper.
Undergrowth, medium dense sagebrush and grass.

From the cor. of secs. 3, 4, 33 and 34, on the S. bdy.
of the Tp.

N. 0° 04' W., bet. secs. 33 and 34.

Over rolling desert land, through scattered timber and
dense undergrowth.

1.46 Small draw, drains SW., from N. 70° E.; asc. 60 ft.
over SW. slope.

13.30 Top of rise; thence over nearly level land.

16.44 Bladed dirt road, bears S. 36° E. and curves to the N.

18.41 Fence, bears S. 88° 06' E. and N.; thence along fence.

38.46 The 1/4 sec. cor. of secs. 33 and 34, monumented with
a limestone, 24x12x10 ins., firmly set in the ground
and mkd. 1/4 on the W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 18
ins. in the ground, to solid rock and in a mound of
stone, 4 ft. base to top, with brass cap mkd.

T9S R7W
1/4
S33|S34
1965

Deposit the original cor. in the mound alongside
the iron post.

N. 0° 09' E., beginning new measurement.

Over gently rolling land, through scattered timber and
dense undergrowth; along fence.

40.92 The cor. of secs. 27, 28, 33 and 34, monumented with a
limestone, 17x12x5 ins., firmly set in the ground and
mkd. with 1 notch on the S. and 3 notches on the E.
edge.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24
ins. in the ground, with brass cap mkd.

T9S R7W
S28|S27
S33|S34
1965

Dependent Resurvey of a Portion of the
Subdivision of T. 9 S., R. 7 W.

CHAINS

Raise a mound of stone, 4 ft. base 3 ft. high,
W. of the cor.

Bury the original cor. alongside the iron post.

Land, rolling mountains.
Soil, rocky, sandy clay.
Timber, scattered juniper.
Undergrowth, dense sagebrush, grass and weeds.

From the cor. of secs. 26, 27, 34 and 35.

S. 89° 25' W., bet. secs. 27 and 34 along N. side of
fence.

Over desert mountain land, through dense timber; desc.
135 ft. over gentle W. slope.

40.56 The 1/4 sec. cor. of secs. 27 and 34, monumented with a
sandstone, 18x11x10 ins., firmly set in the ground and
mkd. 1/4 on the N. face.

From which an original bearing tree

A 16 inch juniper, bears S. 15° E., 71 lks. (record
reports a juniper, S. 10° E., 100 lks.). No trace
of the other bearing tree was found.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins.
in the ground, with brass cap mkd.

T9S R7W

¼ — S27
S34

1965

from which

A juniper, 8 ins. in diam., bears N. 78° E., 29
lks. dist., mkd. 1/4 S BT.

Bury the original cor. alongside the iron post.

S. 88° 18' W., beginning new measurement.

Over desert bench land, through scattered timber and
dense undergrowth; desc. 10 ft. over W. slope.

- 8.00 Trail road, bears N. 28° E. and S. 28° W.
- 8.69 Irrigation ditch, drains S. 28° W.; asc. 10 ft. over
SE. slope.
- 11.10 Spur, projects S. 20° W.; desc. 105 ft. over NW. slope.
- 24.60 Recross irrigation ditch, drains N. 75° W.
- 26.95 Trail road, bears N. 15° W. and S. 75° E.; desc. 10 ft.
over NW. slope.

Dependent Resurvey of a Portion of the
Subdivision of T. 9 S., R. 7 W.

CHAINS	
39.60	<p>The cor. of secs. 27, 28, 33 and 34.</p> <p>Land, rolling desert mountains. Soil, rocky, sandy, clay. Timber, dense to scattered juniper. Undergrowth, medium dense sagebrush and grass.</p>
10.30	<p>N. 0° 34' E., bet. secs. 27 and 28.</p> <p>Over desert bench land, through medium dense timber and undergrowth; desc. 26 ft. over gentle N. slope, along a barbed wire fence.</p>
15.00	<p>Spring in bottom of draw, drains N. 70° W.</p> <p>Area W. of fence has been cleared of timber and undergrowth, for replanting of grass. Thence along gentle W. slope.</p>
35.20	<p>Trail road, bears irregularly E. and W.</p>
40.20	<p>Point for the 1/4 sec. cor. of secs. 27 and 28, at proportionate measurement; there is no remaining evidence of the original cor.</p>
	<p>Set an iron post, 30 ins. long, 2½ ins. in diam., 18 ins. in the ground to solid rock and in a mound of stone, 4 ft. base to top, with brass cap mkd.</p>
	<p>T9S R7W ½ S28 S27 1965</p>
	<p>from which</p>
	<p>A juniper, 12 ins. in diam., bears S. 83° W., 33 lks. dist., mkd. 1/4 S28 BT.</p>
	<p>Desc. 75 ft. along a gentle W. slope, along the E. side of a N-S fence line.</p>
63.20	<p>Small draw, drains N. 55° W.; continue along W. slope.</p>
70.90	<p>Draw, drains irregularly W.; asc. 50 ft. over SW. slope.</p>
79.20	<p>Top of rise; thence along NW. slope.</p>
80.40	<p>The cor. of secs. 21, 22, 27 and 28, monumented with a limestone, 16x8x4 ins., firmly set in the ground and mkd. with 2 notches on the S. and 3 notches on the E. edge.</p>
	<p>At the cor. point</p>
	<p>Set an iron post, 30 ins. long, 2½ ins. in diam., 18 ins. in the ground, to solid rock and in a mound of stone, 3½ ft. base to top, with brass cap mkd.</p>

Dependent Resurvey of a Portion of the
Subdivision of T. 9 S., R. 7 W.

CHAINS	
	<p style="text-align: center;">T9S R7W <u>S21</u> <u>S22</u> <u>S28</u> <u>S27</u> 1965</p> <p>from which</p> <p style="padding-left: 40px;">A juniper, 6 ins. in diam., bears N. 88° 30' W., 8 lks. dist., mkd. S21 BT.</p> <p style="padding-left: 40px;">Bury the original cor. alongside the iron post.</p> <p>Land, rolling desert bench. Soil, rocky, sandy clay. Timber, dense to scattered juniper. Undergrowth; medium dense sagebrush.</p>
	<p>N. 0° 42' W., bet. secs. 21 and 22.</p> <p>Over rolling desert bench land, across cleared area; desc. 20 ft. over NW. slope, along the E. side of a N-S fence line.</p>
2.40	Draw, drains S. 80° W.; asc. 30 ft. over S. slope.
7.00	Low spur, projects W.; desc. 25 ft. over NW. slope.
19.00	Draw, drains irregularly W.; asc. 50 ft. over SW. slope.
24.10	Low spur, projects W.; desc. 30 ft. over NW. slope.
32.90	Draw, drains W.; asc. 30 ft. over SW. slope.
37.86	Government Creek pipeline, bears S. 69° E. and N. 69° W.; 230 lks. to water troughs.
41.66	The 1/4 sec. cor. of secs. 21 and 22, monumented with a sandstone, 20x18x10 ins., firmly set in the ground and mkd. 1/4 on the W. face.
	<p>At the cor. point</p> <p>Set an iron post, 30 ins. long, 2½ ins. in diam., 20 ins. in the ground and in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T9S R7W ¹/₄ <u>S21</u> <u>S22</u> 1965</p> <p style="padding-left: 40px;">Bury the original cor. alongside the iron post.</p>
	<p>N. 0° 09' E., beginning new measurement.</p> <p>Over desert bench land, along E. side of fence line, dense timber E. of fence, cleared replant area W. of fence; asc. 18 ft. over SW. slope.</p>
6.00	Top of rise; desc. 90 ft. over NW. slope.

Dependent Resurvey of a Portion of the
Subdivision of T. 9 S., R. 7 W.

CHAINS	
19.60	Wash, 4 ft. deep, 30 lks. wide, drains irregularly W.
27.90	Wash, 4 ft. deep, 20 lks. wide, drains N. 75° W.
39.94	Point for the cor. of secs. 15, 16, 21 and 22, at proportionate measurement; there is no remaining evidence of the original cor.
	Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.
	T9S R7W
	<u>S16</u> <u>S15</u>
	<u>S21</u> <u>S22</u>
	1965
	Raise a mound of stone, 4 ft. base, 3 ft. high, W. of the cor.
	Land, desert bench.
	Soil, rocky, sandy, clay.
	Timber, medium dense juniper in sec. 22, cleared land in sec. 21.
	Undergrowth, medium dense sagebrush, in sec. 22.
	The 1/4 sec. cor. of secs. 15 and 22, monumented with a white flint stone, 15x10x8 ins., firmly set in the ground and mkd. 1/4 on the N. face.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.
	T9S R7W
	½ <u>S15</u>
	<u>S22</u>
	1965
	Raise a mound of stone, 4 ft. base, 2½ ft. high, N. of the cor.
	Bury the original cor. alongside the iron post.
	S. 88° 52' W., bet. secs. 15 and 22.
	Over desert mountain land, through medium dense timber, medium dense undergrowth; asc. 15 ft. over SE. slope.
4.20	Small spur, projects S.; desc. 55 ft. along SW. slope.
16.60	Slope, changes to S.
22.20	Draw, drains N. 50° W., asc. 30 ft. over N. slope.
23.40	Top of rise, desc. 60 ft. over NW. slope.
39.95	The cor. of secs. 15, 16, 21 and 22.
	Land, desert mountains.
	Soil, rocky clay.
	Timber, medium dense juniper.

Dependent Resurvey of a Portion of the
Subdivision of T. 9 S., R. 7 W.

CHAINS

wild apple.

N. 0° 04' W., bet. secs. 15 and 16.

Over desert mountain land, through medium dense timber, scattered undergrowth; desc. 30 ft. over a NW. slope, along E. side of a N-S fence line.

- 2.50 Small draw, drains irregularly W.; asc. 95 ft. over S. slope.
- 14.70 Low spur, projects W.; desc. 75 ft. over N. slope.
- 24.80 Draw, drains irregularly W.; asc. 65 ft. over S. slope.
- 31.90 Spur, projects W.; desc. 40 ft. over NW. slope.
- 39.94 The 1/4 sec. cor. of secs. 15 and 16, monumented with a sandstone, 14x10x8 ins., firmly set in the ground and mkd. 1/4 on the W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.

T9S R7W

½

S16 | S15

1965

from which

A juniper, 6 ins. in diam., bears S. 39° E., 25 lks. dist., mkd. 1/4 S15 BT.

A juniper, 8 ins. in diam., bears N. 35° W., 68 lks. dist., mkd. 1/4 S16 BT.

Bury the original cor. alongside the iron post.

N. 0° 12' E., beginning new measurement.

Over rolling desert bench land, through dense timber; along a gentle W. slope, and along the east side of a N-S fence line.

- 4.20 Trail road, bears irregularly E. and W.
- 10.60 Wash, 3 ft. deep, 40 lks. wide, drains W.
- 36.60 Small draw, drains irregularly W.
- 40.10 The cor. of secs. 9, 10, 15 and 16, monumented with a sandstone, 16x10x6 ins., firmly set in the ground and mkd. with 4 notches on the S. and 3 notches on the E. edges.

At the cor. point

Dependent Resurvey of a Portion of the
Subdivision of T. 9 S., R. 7 W.

CHAINS

Set an iron post, 30 ins. long, 2½ ins. in diam., 20 ins. in the ground and in a collar of stone, with brass cap mkd.

T9S R7W

S9	S10
S16	S15

1965

Bury the original cor. alongside the iron post.

The above cor. is set in a N-S fence line.

Land, rolling desert bench.

Soil, rocky, sandy clay.

Timber, dense juniper, in sec. 15; sec. 16 has been cleared for replanting.

Undergrowth, medium dense sagebrush scattered grass.

N. 0° 18' E., bet. secs. 9 and 10.

Over desert bench land, along a N-S fence line, area W. of fence has been cleared of timber and undergrowth, medium dense juniper and sagebrush E. of fence.

2.90 Trail road, bears irregularly E. and W.; asc. 25 ft. along W. slope.

23.70 Small draw, drains irregularly W.

40.24 Point for the 1/4 sec. cor. of secs. 9 and 10, at proportionate distance; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.

T9S R7W

S9	S10
----	-----

1965

Raise a mound of stone, 4 ft. base, 3 ft. high, W. of cor.

Continue along fence and gentle W. slope.

54.60 Draw, drains W., end of fence line.

66.40 Draw, drains N. 70° W.

74.60 Small draw, drains W.

80.48 The cor. of secs. 3, 4, 9 and 10, monumented with a limestone, 18x10x6 ins., firmly set in the ground and mkd. with 5 notches on the S. and 3 notches on the E. edge.

At the cor. point

Dependent Resurvey of a Portion of the
Subdivision of T. 9 S., R. 7 W.

CLAIMS

Set an iron post, 30 ins. long, 2½ ins. in diam., 20 ins. in the ground and in a collar of stone, with brass cap mkd.

T9S R7W

S4	S3
S9	S10

1965

from which

A juniper, 10 ins. in diam., bears N. 88° E., 27 lks. dist., mkd. T9S R7W S3 BT.

Deposit broken glass around the iron post.

Bury the original cor. alongside the iron post.

Land, gently sloping desert bench.

Soil, rocky, sandy clay.

Timber, medium dense juniper E. of fence in sec. 10.

Undergrowth, medium sagebrush in sec. 10.

N. 0° 22' E., bet. secs. 3 and 4.

Over gently rolling desert bench land, through dense timber and scattered undergrowth; desc. 70 ft. along W. slope.

32.00 Small draw, drains irregularly W.; asc. 20 ft. along W. slope.

40.20 Point for the 1/4 sec. cor. of secs. 3 and 4, at proportionate distance; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. in diam., 18 ins. in the ground and in a collar of stone, with brass cap mkd.

T9S R7W

S4	S3
----	----

1965

from which

A juniper, 8 ins. in diam., bears S. 33° 30' W., 32 lks. dist., mkd. 1/4 S BT.

Desc. 30 ft. along gentle W. slope.

49.30 Small draw, drains N. 60° W., desc. 35 ft. along W. slope.

63.20 Wash, 5 ft. deep, 60 lks. wide, drains irregularly W.

Dependent Resurvey of a Portion of the
Subdivision of T. 9 S., R. 7 W.

CHAINS	
66.40	Bladed dirt road, bears N. 80° W. and S. 80° E.
80.70	<p>The cor. of secs. 3, 4, 33 and 34, on the N. bdy. of the Tp., previously described.</p> <p>Land, gently rolling desert bench. Soil, rocky, sandy clay. Timber, dense juniper. Undergrowth, scattered sagebrush and grass.</p>
Survey of a Portion of the Subdivision of T. 9 S., R 7 W.	
32.80	<p>From the cor. of secs. 1, 6, 7 and 12, on the E. bdy. of the Tp., previously described.</p> <p>West, bet. secs. 1 and 12.</p> <p>Over mountainous land, through dense timber; by triangulation; asc. 435 ft. over broken E. slope.</p>
40.00	<p>Ridge, bears irregularly N. and S., end of triangulation; desc. 120 ft. over a W. slope.</p> <p>Point for the 1/4 sec. cor. of secs. 1 and 12.</p> <p>Set an iron post, 30 ins. long, 2½ ins. in diam., 18 ins. in the ground, to solid rock and in a mound of stone, 3 ft. base to top, with brass cap mkd.</p>
<p>T9S R7W</p> $\frac{1}{4} \frac{S1}{S12}$ <p>1966</p>	
<p>from which</p> <p style="padding-left: 40px;">A pine, 8 ins. in diam., bears S. 2 lks. dist., mkd. 1/4 S12 BT.</p> <p>Desc. 25 ft. along NW. slope.</p>	
46.30	Small draw, drains N.; asc. 165 ft. over NE. slope.
52.00	Ridge, bears N. and S.; desc. 185 ft. over broken NW. changing to W. slope.
66.70	Rocky point slopes W.; desc. 195 ft. over W. slope.
78.85	<p>Point selected for the witness cor. of secs. 1, 2, 11 and 12.</p> <p>Over a cross (X) cut on solid sandstone, set an iron post, 30 ins. long, 2½ ins. in diam., in a mound of stone, 4½ ft. base to top, with brass cap mkd.</p>

Survey of a Portion of the Subdivision of T. 9 S., R. 7 W.

CHAINS

T9S R7W

S2	S1	WC
S11	S12	

1966

- 78.90 Rim of ledges, bears N. 70° W. and S. 70° E.; desc. 80 ft. over broken ledges facing SW.
- 80.00 True point for the cor. of secs. 1, 2, 11 and 12, falls on the slope of a sandstone ledge, where the cor. cannot be perpetuated.
- Land, broken mountains.
Soil, rocky clay, loam.
Timber, medium dense pine, pinon, juniper and mahogany.
Undergrowth, scant oak, maple and sagebrush.
- From the true point for the cor. of secs. 1, 2, 11 and 12.
- N. 0° 01' W. bet. secs. 1 and 2.
- Over rough broken mountain land, through dense timber; by triangulation asc. about 900 ft. over a SW. slope.
- 35.00 Spur, ridge, SE. and NW.; desc. 200 ft. over NE. slope.
- 40.00 Point for the 1/4 sec. cor. of secs. 1 and 2.
- Set an iron post, 30 ins. long, 2½ ins. in diam., 16 ins. in the ground, to solid rock and in a mound of stone, 4 ft. base to top, with brass cap mkd.
- T9S R7W
- ½
- S2|S1
- 1966
- Desc. 760 ft. over NE. slope; changing to N. slope.
- 64.70 Draw, drains W.; asc. 50 ft. along SW. slope.
- 69.40 Draw, drains SW.; asc. 40 ft. over SE. slope.
- 80.81 Intersect the N. bdy. of the Tp.
- Point for the closing cor. of secs. 1 and 2, Tp. 9 S., R. 7 W.
- Set an iron post, 30 ins. long, 2½ ins. in diam., 22 ins. in the ground and in a collar of stone, with brass cap mkd.

T8S R7W

S2	S1
C	C

T9S R7W

1966

Survey of a Portion of the Subdivision of T. 9 S., R. 7 W.

CHAINS

From point of intersection, the cor. of secs. 35 and 36, T. 8 S., R. 7 W., bears S. 89° 38' W., 1.51 chs. dist., monumented with an iron post, 3 ins. in diam., previously described.

Land, broken mountains.
Soil, rocky, clay, loam.
Timber, dense pinon, medium pine and juniper.
Undergrowth, medium oak, maple and wild apple.

Point for the N. 1/4 sec. cor. of sec. 1, at midpoint between the closing cors. of secs. 1 & 6, T. 9 S., Rs. 6 & 7 W., and the closing cor. 1 & 2, T. 9 S., R. 7 W.

Set an iron post, 30 ins. long, 2½ ins. in diam., 18 ins. in the ground, to solid rock and in a mound of stone, 4 ft. base to top, with brass cap mkd.

$\frac{1}{4}$ S1
 T9S R7W
 1966

From the above cor., the 1/4 sec. cor. of sec. 36, T. 8 S., R. 7 W., monumented with an iron post, 1 in. in diam., bears N. 89° 45' W., 3.11 chs. dist., conforming to the record.

From the true point for the cor. of secs. 1, 2, 11 and 12.

West, bet. secs. 2 and 11.

Over mountainous land, through dense timber and scattered undergrowth; desc. 100 ft. over NW. slope.

10.00 Slope changes to N.; desc. 350 ft.

40.00 Point for the 1/4 sec. cor. of secs. 2 and 11.

Set an iron post, 30 ins. long, 2½ ins. in diam., 10 ins. in the ground, to solid rock and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T9S R7W

$\frac{1}{4}$ S2
 S11

1966

Desc. 200 ft. along N. slope.

73.50 Ridge, bears NW. and SE.; desc. 145 ft. over W. slope.

Survey of a Portion of the Subdivision of T. 9 S., R. 7 W.

CHAINS	
80.00	Point for the cor. of secs. 2, 3, 10 and 11. Set an iron post, 30 ins. long, 2½ ins. in diam., 18 ins. in the ground, to solid rock and in a mound of stone, 3½ ft. base to top, with brass cap mkd.
	T9S R7W S3 S2 S10 S11 1966
	Land, mountainous. Soil, rocky, clay. Timber, medium dense mahogany and juniper. Undergrowth, scattered patches of oak and maple.
	N. 0° 02' W., bet. secs. 2 and 3. Over mountainous land, through medium dense timber and medium undergrowth; asc. 20 ft. over SW. slope.
3.80	Spur, projects NW.; desc. 75 ft. over NE. slope.
12.50	Draw, drains N. 45° W.; asc. 60 ft. over SW. slope.
17.50	Spur, projects W.; desc. 70 ft. along W. slope.
25.40	Draw, drains N. 60° W.; asc. 115 ft. over S. slope.
37.80	Spur, projects W.; desc. 40 ft. over N. slope.
40.00	Point for the 1/4 sec. cor. of sec. 2 and 3. Set an iron post, 30 ins. long, 2½ ins. in diam., 16 ins. in the ground, to solid rock and in a mound of stone, 3½ ft. base to top, with brass cap mkd.
	T9S R7W ¼ S3 S2 1966
	Desc. 100 ft. over N. slope.
44.00	Draw, drains W.; asc. 115 ft. over SW. slope.
49.80	Spur, projects NW.; desc. 90 ft. over NE. slope.
53.80	Draw, drains W.; asc. 130 ft. over S. slope.
60.80	Spur, projects SW.; desc. 380 ft. along W. slope.
77.10	Bulldozed road, bears irregularly E. and W.
77.90	Wash, 2 ft. deep, 30 lks. wide, drains W.; asc. 80 ft. along SE. slope.
80.23	Intersect the N. bdy. of the Tp.

Survey of a Portion of the Subdivision of T. 9 S., R. 7 W.

CHAINS

Point for the closing cor. of secs. 2 and 3.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 18 ins. in the ground to solid rock and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T8S R7W

S3	S2
C	C

T9S R7W

1966

From the point of intersection, the cor. of secs. 34, & 35, T. 8 S., R. 7 W., bears East 1.17 chs. dist. monumented with an iron post, $2\frac{1}{2}$ ins. in diam., previously described.

Land, mountainous.

Soil, rocky, clay, loam.

Timber, medium dense pinon and juniper.

Undergrowth, dense sagebrush, oak and maple.

Point for the N. $\frac{1}{4}$ sec. cor. of sec. 2, at midpoint between the closing cors. of secs. 1 & 2 and 2 & 3, T. 9 S., R. 7 W.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 20 ins. in the ground and in a mound of stone, 4 ft. base to top, with brass cap mkd.

$\frac{1}{2}$	S2
---------------	----

T9S R7W

1966

From the above cor., the $\frac{1}{4}$ sec. cor. of sec. 35, T. 8 S. R. 7 W., monumented with an iron post, $2\frac{1}{2}$ ins. in diam., previously described, bears N. $89^{\circ} 45'$ E., 0.75 chs. distance.

From the cor. of secs. 2, 3, 10 and 11.

S. $89^{\circ} 45'$ W., bet. secs. 3 and 10.

Over mountainous land, through dense timber and medium undergrowth; desc. 255 ft. over W. slope.

11.90 Draw, drains S. 40° W.; asc. 25 ft. over SE. slope.

17.10 Low spur, projects S. 40° W.; desc. 125 ft. over W. slope.

38.90 Point for the $\frac{1}{4}$ sec. cor. of secs. 3 and 10.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 20 ins. in the ground, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T9S R7W

$\frac{1}{2}$	S3
	S10

Survey of a Portion of the Subdivision of T. 9 S., R. 7 W.

CHAINS

- 39.00 Barbed wire fence, bears N. and S.; desc. 45 ft. over gentle W. slope.
- 47.80 Draw, drains N. 40° W.; asc. 30 ft. over E. slope.
- 52.00 Top of rise; desc. 95 ft. over rolling W. slope.
- 70.10 Wash, 3 ft. deep, 30 lks. wide, drains N. 40° W.; desc. 20 ft. over gentle W. slope.
- 78.90 The cor. of secs. 3, 4, 9 and 10.

Land, mountainous and gently rolling.
Soil, rocky, sandy, clay.
Timber, medium dense juniper.
Undergrowth, medium dense sagebrush, grass and weeds.

Dependent Resurvey of a Portion of the
Subdivision of T. 9 S., R. 7 W.

Reestablishment of the Survey Executed
by A. J. Stewart Jr. in 1872.

From the cor. of secs. 4, 5, 32 and 33, on the S. bdy.
of the Tp.

N. 0° 01' E., bet. secs. 32 and 33.

Over rolling desert land, through scattered timber and
medium dense undergrowth; desc. 30 ft. over NW. slope,
along a fence line.

- 3.50 Wash, 2 ft. deep, 6 lks. wide, drains NE.; asc. 155 ft.
over SE. slope, along the E. side of fence.
- 34.88 Top of spur, projects NE., barbed wire fence, bears NE.
and SW., 92 lks. to fence cor. from S. and W.; desc. 35
ft. over NW. slope.
- 40.73 Point for the 1/4 sec. cor. of secs. 32 and 33, at
proportionate distance; there is no remaining evidence
of the original cor.

Set an iron post, 30 ins. long, 2½ ins. in diam., 24
ins. in the ground, with brass cap mkd.

T9S R7W

½
S32|S33

1965

Raise a mound of stone, 3 ft. base, 2 ft. high
W. of the cor.

Desc. 155 ft. over NW. slope.

Dependent Resurvey of a Portion of the
Subdivision of T. 9 S., R. 7 W.

CHAINS

- 53.60 Dirt road, bears NE. and SW.
- 55.10 Wash, 2 ft. deep, 10 lks. wide, drains NE.; asc. 50 ft. over SE. slope.
72. 20 Spur projects SE.; desc. 95 ft. over NE. slope.
- 80.70 Wash, 4 ft. deep, 6 lks. wide, drains NE.
- 81.46 The cor. of secs. 28, 29, 32 and 33, monumented with a blue limestone, 24x16x8 ins., firmly set in the ground and mkd. with 1 groove on the S. face and 4 notches on the E. edge.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.

T9S R7W

S29|S28
S32|S33

1965

Raise a mound of stone, 4 ft. base, 2 ft. high, W. of the cor.

Bury the original cor. alongside the iron post.

Land, rolling desert mountains.

Soil, rocky, sandy clay.

Timber, scattered juniper, most of the area has been cleared of timber.

Undergrowth, medium dense sagebrush, grass and weeds.

From the cor. of secs. 27, 28, 33 and 34.

N. 88° 56' W., bet. secs. 28 and 33.

Over rolling desert mountain land; through dense timber and undergrowth; desc. 15 ft. over W. slope.

- 7.70 Gravel road, bears NW. and SE.; desc. 110 ft. over W. slope.

- 40.27 The 1/4 sec. cor. of secs. 28 and 33, monumented with a sandstone, 12x8x4 ins., firmly set in the ground and mkd. 1/4 on the N. face (record reports a granite 20x15x12 ins.).

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.

T9S R7W

¼ S28
S33

1965

Raise a mound of stone, 3 ft. base, 2½ ft. high N. of the cor.

Dependent Resurvey of a Portion of the
Subdivision of T. 9 S., R. 7 W.

CHAINS

The above cor. is set in an old barbed fence, bearing irregularly N. and S.

N. 88° 51' W., beginning new measurement.

Over nearly level land, that has been cultivated, in the past.

- 6.00 Government Creek, 3 ins. deep, 10 lks. wide, flows irregularly N.
- 9.33 Barbed wire fence, bears N. and S.; leave bottom land.
- 9.80 Dirt road, bears irregularly N. and S.; asc. 100 ft. over SE. slope.
- 16.80 Spur, projects NW.; desc. 30 ft. over NW. slope.
- 20.12 Wire fence, bears N. and S.; desc. 30 ft. over NW. slope.
- 28.40 Wash, 3 ft. deep, 12 lks. wide, drains N.; thence along N. slope.
- 38.90 Wash, 2½ ft. deep, 6 ft. wide, drains NE.; asc. 10 ft. over SE. slope.
- 40.21 The cor. of secs. 28, 29, 32 and 33.

Land, rolling desert mountainous.

Soil, sandy clay.

Timber, medium dense juniper the first one half mile, scattered juniper the balance.

Undergrowth, medium dense sagebrush and grass.

N. 0° 07' W., bet. secs. 28 and 29.

Over rolling desert mountain land, through medium dense undergrowth, land has been cleared of timber; asc. 120 ft. over SE. slope.

- 14.60 Spur, projects SE.; desc. 200 ft. over N. slope.
- 36.00 Wash, 2 ft. deep, 15 lks. wide, drains NE.; asc. 15 ft. over SE. slope.
- 37.90 Unimproved dirt road, bears irregularly NE. and SW.; asc. 30 ft. over SE. slope.
- 40.01 The 1/4 sec. cor. of secs. 28 and 29, monumented with a limestone, 15x10x2 ins., firmly set in the ground and mkd. 1/4 on the W. face (record reports a limestone 20x10x6 ins.).
- At the cor. point
- Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.

Dependent Resurvey of a Portion of the
Subdivision of T. 9 S., R. 7 W.

CHAINS

T9S R7W

$$\frac{1}{2}$$

S29	S28
-----	-----

1965

Raise a mound of stone, 4 ft. base 2 ft. high, W.
of the cor.

Bury the original cor. alongside the iron post.

N. 0° 14' E., beginning new measurement.

Over rolling desert land; asc. 20 ft. over SE. slope.

- 3.10 Spur, cor. of fences bearing N., E. and SW.; enter
timber; desc. 130 ft. along N. changing to E. slope,
along a fence line.
- 24.05 Cor. of fences bearing E., N. and S.
- 26.50 Wire fence, bears SE.; desc. 30 ft. over E. slope, along
N-S fence.
- 37.10 Wash, 15 ft. deep, 30 lks. wide, drains E.; desc. 15 ft.
along E. slope.
- 40.27 The cor. of secs. 20, 21, 28 and 29, monumented with a
limestone, 15x9x8 ins., firmly set in the ground and
mkd. with 4 notches on the E. and 2 notches on the S.
edges.
- At the cor. point
- Set an iron post, 30 ins. long, 2½ ins. in diam., 24
ins. in the ground and in a collar of stone, with brass
cap mkd.

T9S R7W

S20	S21
S29	S28

1965

The above cor. is set in a N-S fence line.

Land, rolling desert mountain land.

Soil, sandy, clay.

Timber, medium dense juniper, in sec. 20, the N. 1/2
mile.

Undergrowth, dense sagebrush and grass.

From the cor. of secs. 21, 22, 27 and 28.

N. 89° 01' W., bet. secs. 21 and 28.

Over rolling desert bench land, through widely scattered
juniper and dense undergrowth; desc. 50 ft. over NW.
slope.

Dependent Resurvey of a Portion of the
Subdivision of T. 9 S., R. 7 W.

CHAINS

- 6.70 Small draw, drains SW.; desc. 95 ft. along SW. changing to W. slope.
- 24.30 Draw, drains irregularly NW.; asc. 15 ft. over NE. slope
- 39.00 Top of rise, slopes N.
- 40.54 Point for the 1/4 sec. cor. of secs. 21 and 28, at proportionate distance; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground and in a collar of stone, with brass cap mkd.

T9S R7W

$$\frac{S21}{S28}$$

1965

- Desc. 90 ft. over W. slope.
- 59.70 Dirt road, bears irregularly N. and S.
- 60.40 Wash, 2 ft. deep, 40 lks. wide, drains NW.
- 61.38 Wire fence, bears N. and S.; desc. 10 ft. over gentle W. slope.
- 68.70 Dirt road, bears irregularly N. and S.
- 72.80 Government Creek, dry wash, 3 ft. deep, 60 lks. wide, drains irregularly N.
- 73.66 Wire fence, bears N. and S.; asc. 40 ft. over E. slope.
- 81.08 The cor. of secs. 20, 21, 28 and 29.

Land, gently rolling desert bench.
Soil, sandy clay.
Timber, widely scattered juniper.
Undergrowth, medium dense sagebrush and grass.

N. 0° 21' W., bet. secs. 20 and 21.

Over desert bench land, through scattered timber; desc. 50 ft. along E. slope, along a fence line.

- 24.38 Wire fence, bears E. and W.; desc. 30 ft. along NE. slope.
- 40.21 The 1/4 sec. cor. of secs. 20 and 21, monumented with a flintstone, 20x10x7 ins., firmly set in the ground and mkd. 1/4 on the W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 20 ins. in the ground and in a collar of stone, with brass cap mkd.

Dependent Resurvey of a Portion of the
Subdivision of T. 9 S., R. 7 W.

CHAINS

T9S R7W

$$\frac{1}{4}$$

S20	S21
-----	-----

1965

Bury the original cor. alongside the iron post.

The above cor. is set at the cor. of fences bearing
N., S. and E.

N. 1° 01' E., beginning new measurement.

Over desert bench land; desc. 15 ft. over NE. slope.

12.90 Government Creek, dry wash, 4 ft. deep, 30 lks. wide,
drains irregularly NW., end of fence, thence over
nearly level land.

16.80 Dirt road, bears NW. and SE.

22.10 Wash, one ft. deep, 50 lks. wide, drains NW.; asc. 20
ft. over SW. slope.

39.90 Barbed wire fence, bears E. and W.

40.00 The cor. of secs. 16, 17, 20 and 21, monumented with a
sandstone, 14x8x6 ins., firmly set in the ground, and
mkd. with 4 notches on the E. and 3 notches on the S.
edge.

At the cor. point

Set an iron post, 30 ins. long, 16 ins. in the ground,
to solid rock and in a mound of stone, 4 ft. base to top,
with brass cap mkd.

T9S R7W

S17	S16
S20	S21

1965

Bury the original cor. alongside the iron post.

Land, gently rolling desert.

Soil, sandy clay.

Timber, widely scattered juniper.

Undergrowth, dense sagebrush and grass.

From the cor. of secs. 15, 16, 21 and 22.

N. 89° 51' W., bet. secs. 16 and 21.

Over desert bench land that has been cleared of timber;
desc. 95 ft. over gentle W. slope.

25.70 Wash, 3 ft. deep, 60 lks. wide, drains irregularly NW.;
desc. 13 ft. over W. slope.

40.04 Point for the 1/4 sec. cor. of secs. 16 and 21, at pro-
portionate distance; there is no remaining evidence of
the original cor.

Dependent Resurvey of a Portion of the
Subdivision of T. 9 S., R. 7 W.

CHAINS

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.

T9S R7W

$$\frac{1}{2} \frac{S16}{S21}$$

1965

Raise a mound of stone, 3 ft. base, 2 ft. high, N. of the cor.

Desc. 45 ft. over gentle W. slope.

57.50 Wash, 2 ft. deep, 10 lks. wide, drains NW.; desc. 60 ft. over gentle W. slope.

80.08 The cor. of secs. 16, 17, 20 and 21.

Land, gently rolling desert.

Soil, sandy clay.

Timber, none land has been cleared.

Undergrowth, dense grass, scattered sagebrush.

N. 0° 30' E., bet. secs. 16 and 17.

Over gently rolling desert land along a gentle W. slope through medium undergrowth; area is being cleared of timber.

11.50 Wash, 2 ft. deep, 10 lks. wide, drains W.

28.10 Wash, 2 ft. deep, 10 lks. wide, drains W.

35.50 Wash, 1-1/2 ft. deep, 20 lks. wide, drains W.

40.26 The 1/4 sec. cor. of secs. 16 and 17, monumented with a sandstone, 10x8x6 ins., firmly set in the ground and mkd. 1/4 on the W. face (record reports a sandstone 14x12x8 ins.).

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.

T9S R7W

$$\frac{1}{2} \frac{S17}{S16}$$

1965

Raise a mound of stone, 4 ft. base, 3 ft. high, W. of the cor.

Bury the original cor. alongside the iron post.

N. 0° 20' W., beginning new measurement.

Dependent Resurvey of a Portion of the
Subdivision of T. 9 S., R. 7 W.

CHAINS

Over gently rolling desert land that is being cleared of timber.

- 3.50 Wash, 1½ ft. deep, 10 lks. wide, drains W.
17.40 Wash, 1½ ft. deep, 20 lks. wide, drains W.
32.80 Wash, 2 ft. deep, 15 lks. wide, drains W.
40.23 Point for the cor. of secs. 8, 9, 16 and 17, at proportionate distance; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.

T9S R7W

S8	S9
S17	S16

1965

Raise a mound of stone, 4 ft. base, 2½ ft. high W. of the cor.

Land, gently rolling desert bench.

Soil, sandy, clay.

Timber, land is being cleared.

Undergrowth, medium dense sagebrush and grass.

From the cor. of secs. 9, 10, 15 and 16.

N. 89° 38' W., bet. secs. 9 and 16.

Over gently rolling desert bench land, through medium dense undergrowth.

- .36 Barbed wire fence, bears N. and S.; desc. 50 ft. over gentle W. slope.
6.10 Wash, 2 ft. deep, 20 lks. wide, drains irregularly NW.; desc. 85 ft. over gentle W. slope.
39.96 Point for the 1/4 sec. cor. of secs. 9 and 16, at proportionate distance; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.

T9S R7W

¼	S9	S16
---	----	-----

1965

Raise a mound of stone, 4 ft. base, 2½ ft. high, N. of the cor.

Desc. 115 ft. over a gentle W. slope.

- 71.80 Wash, 5 ft. deep, 30 lks. wide, drains NW.; desc. 25 ft. over a gentle W. slope.

Dependent Resurvey of a Portion of the
Subdivision of T. 9 S., R. 7 W.

CHAINS

Land, rolling desert bench.
Soil, sandy clay.
No timber.
Undergrowth, medium dense sagebrush and grass.

N. 0° 38' E., bet. secs. 8 and 9.

Over gently rolling desert bench land, across land that
has been cleared of timber.

- 6.20 Wash, 2½ ft. deep, 30 lks. wide, drains W.
18.40 Wash, 10 ft. deep, 50 lks. wide, drains W.
21.10 Wash, 6 ft. deep, 30 lks. wide, drains W.
26.95 Jeep road, bears irregularly E. and W.
40.23 The ¼ sec. cor. of secs. 8 and 9, monumented with
a limestone, 18x12x4 ins., firmly set in the ground
and mkd. 1/4 on the W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24
ins. in the ground, with brass cap mkd.

T9S R7W

½
S8 | S9

1965

Raise a mound of stone, 3 ft. base, 2 ft. high
W. of the cor.

Bury the original cor. alongside the iron post.

N. 0° 24' E., beginning new measurement.

Over desert bench across land that has been cleared of
timber.

- 2.60 Wash, 5 ft. deep, 30 lks. wide, drains W.
10.00 Wash, 1 ft. deep, 10 lks. wide, drains W.
20.80 Wash, 1 ft. deep, 10 lks. wide, drains W.
25.60 Wash, 2 ft. deep, 15 lks. wide, drains W.
38.80 Wash, 3 ft. deep, 20 lks. wide, drains W.
39.97 Barbed wire fence, bears E. and W.
40.16 The cor. of secs. 4, 5, 8 and 9, monumented with a
limestone, 18x10x8 ins., firmly set in the ground and
mkd. with 5 notches on the S. and 4 notches on the E.
edge.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24

Dependent Resurvey of a Portion of the
Subdivision of T. 9 S., R. 7 W.

CHAINS

ins. in the ground, with brass cap mkd.

T9S R7W

$\frac{S5}{S8} | \frac{S4}{S9}$

1965

Raise a mound of stone, 4 ft. base, 3 ft. high,
W. of the cor.

Bury the original cor. alongside the iron post.

Land, gently rolling desert.

Soil, sandy, clay.

No timber.

Undergrowth, medium dense sagebrush and grass.

From the cor. of secs. 3, 4, 9 and 10.

N. 89° 40' W., bet. secs. 4 and 9.

Over desert bench land, through medium dense under-
growth; desc. 110 ft. over gentle W. slope, along an
E-W fence line.

15.90

Draw, drains NW. about 2 chs., then curves to the W.;
desc. 60 ft. over W. slope.

39.89

The 1/4 sec. cor. of secs. 4 and 9, monumented with a
limestone, 18x10x8 ins., firmly set in the ground and
mkd. 1/4 on the N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24
ins. in the ground, with brass cap mkd.

T9S R7W

$\frac{1}{4} \frac{S4}{S9}$

1965

Raise a mound of stone, 3 ft. base, 2 ft. high,
N. of the cor.

Bury the original cor. alongside the iron post.

N. 89° 47' W., beginning new measurement.

Over desert bench land; desc. 120 ft. over gentle W.
slope, along N. side of fence line.

39.71

The cor. of secs. 4, 5, 8 and 9.

Land, gently rolling desert.

Soil, sandy clay.

Timber, land in sec. 9 has been cleared, medium dense
juniper in sec. 4.

Undergrowth, medium dense sagebrush and grass.

Dependent Resurvey of a Portion of the
Subdivision of T. 9 S., R. 7 W.

CHAINS

N. 0° 30' W., bet. secs. 4 and 5.

Over nearly level desert land through dense timber;
desc. 20 ft. along gentle W. slope.

- 24.60 Wash, 2 ft. deep, 10 lks. wide, drains irregularly W.
36.50 Wash, 1 ft. deep, 10 lks. wide, drains irregularly W.
40.62 The 1/4 sec. cor. of secs. 4 and 5, monumented with a
limestone, 16x10x7 ins., firmly set in the ground and
mkd. 1/4 on the W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24
ins. in the ground, with brass cap mkd.

T9S R7W

½
S5|S4

1965

Set a steel fence post, 1 ft. N. of the cor.

Bury the original cor. alongside the iron post.

N. 0° 52' W., beginning new measurement.

Continue over desert land, through dense timber, along
a gentle W. slope.

- 12.20 Wash, 2 ft. deep, 9 lks. wide, drains W.
21.20 Wash, 2 ft. deep, 15 lks. wide, drains W.
24.80 Wash, 1 ft. deep, 10 lks. wide, drains W.
33.00 Wash, 5 ft. deep, 50 lks. wide, drains W.
36.10 Dirt road, bears irregularly E. and W.
39.40 The cor. of secs. 4, 5, 32 and 33, on the N. bdy. of
the Tp., previously described.

Land, nearly level desert.
Soil, sandy clay.
Timber, medium dense juniper.
Undergrowth, scattered sagebrush and grass.

From the cor. of secs. 5, 6, 31 and 32, on the S. bdy.
of the Tp.

N. 0° 02' W., bet. secs. 31 and 32.

Over desert mountain land, through scattered timber.

Asc. 100 ft. along S. changing to E. slope.

- 26.30 Spur, projects NE.; desc. 100 ft. along NW. slope.
40.31 The 1/4 sec. cor. of secs. 31 and 32, monumented with
a limestone, 17x10x8 ins., firmly set in the ground,

Dependent Resurvey of a Portion of the
Subdivision of T. 9 S., R. 7 W.

CHAINS

and mkd. 1/4 on the W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.

T9S R7W

½

S31|S32

1965

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of the cor.

Bury the original cor. alongside the iron post.

N. 0° 40' E., beginning new measurement.

Over desert mountain land through medium timber; desc. 315 ft. over NW. slope, along E. side of wire fence.

34.20 Draw, drains NE.; asc. 30 ft. over SE. slope.

42.39 The cor. of secs. 29, 30, 31 and 32, monumented with a limestone, 18x10x7 ins., firmly set in the ground and mkd. with 1 notch on the S. and 5 notches on the E. edge.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 18 ins. in the ground, to solid rock and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T9S R7W

S30|S29

S31|S32

1965

Bury the original cor. alongside the iron post.

Cor. is set at cor. of fences bearing N., S. and E.

Land, rolling desert hills.
Soil, rocky, sandy clay.
Timber, medium dense, to scattered juniper.
Undergrowth, medium sagebrush and grass.

From the cor. of secs. 28, 29, 32 and 33.

N. 88° 52' W., bet. secs. 29 and 32.

Over rolling mountainous land, area has been cleared of timber; asc. 170 ft. over SE. slope.

Dependent Resurvey of a Portion of the
Subdivision of T. 9 S., R. 7 W.

CHAINS

- 24.20 Jeep road, bears irregularly NE. and SW.; asc. 55 ft. over SE. slope.
- 36.90 Spur, projects N.
- 38.07 Cor. of fences bearing N., S. and W.; thence along fence.
- 40.04 The 1/4 sec. cor. of secs. 29 and 32, monumented with a limestone, 14x12x8 ins., firmly set in the ground and mkd. 1/4 on the N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.

T9S R7W

¼ $\frac{S29}{S32}$

1965

Raise a mound of stone, 3 ft. base, 2 ft. high, N. of the cor.

Bury the original cor. alongside the iron post.

The above cor. is set 2 lks. N. of an E-W fence.

N. 88° 56' W., beginning new measurement.

- Over rolling mountainous land, continue along fence line; desc. 80 ft. over W. slope.
- 6.20 Draw, drains N.; asc. 135 ft. over SE. slope.
- 25.80 Spur, projects NE.; desc. 85 ft. over NW. slope.
- 36.80 Draw, drains NE.; asc. 10 ft. over SE. slope.
- 39.69 The cor. of secs. 29, 30, 31 and 32.
- Land, rolling mountains.
Soil, rocky, sandy clay.
Timber, scattered to medium dense juniper.
Undergrowth, medium sagebrush and grass.
- S. 87° 59' W., bet. secs. 30 and 31.
- Over desert mountain land, through medium timber and undergrowth; asc. 110 ft. over SE. slope.
- 7.20 Spur, projects N.; desc. 80 ft. over W. slope.
- 19.10 Draw, N.; asc. 150 ft. over E. slope, along E-W fence.

Dependent Resurvey of a Portion of the
Subdivision of T. 9 S., R. 7 W.

CHAINS	
34.70	Spur, projects N. 5° E.; desc. 65 ft. over W. slope.
39.98	The 1/4 sec. cor. of secs. 30 and 31, monumented with a flintstone, 26x12x10 ins., firmly set in the ground and mkd. 1/4 on the N. face.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. in diam., 26 ins. in the ground, with brass cap mkd.
	T9S R7W
	$\frac{1}{4} \frac{S30}{S31}$
	1965
	Raise a mound of stone, 3 ft. base, 2 ft. high, N. of the cor.
	Bury the original cor. alongside the iron post.
	The above cor. is set at the cor. of fences bearing E. and NW.
	S. 89° 56' W., beginning new measurement.
	Over rolling desert mountain land, through scattered timber; desc. 15 ft. over W. slope.
3.10	Unimproved dirt road, bears irregularly N. and S.; desc. 10 ft. over W. slope.
4.20	Stream 4 ins. deep, 1 lk. wide, flows irregularly N.; desc. 25 ft. over W. slope.
9.40	West Government Creek, dry, drains irregularly N.; asc. 25 ft. over E. slope.
13.18	Wire fence, bears N. and S.
13.40	Unimproved dirt road, bears irregularly N. and S.; asc. 170 ft. over SE. slope.
27.30	Spur, projects N.; desc. 65 ft. over NW. slope.
37.40	Draw, drains NE.; asc. 50 ft. over SE. slope.
39.92	The cor. of secs. 25, 30, 31 and 36, on the W. bdy. of the Tp.
	Land, rolling desert mountains. Soil, rocky, sandy clay. Timber, scattered juniper. Undergrowth, medium dense sagebrush and grass.
	From the cor. of secs. 29, 30, 31 and 32.

Dependent Resurvey of a Portion of the
Subdivision of T. 9 S., R. 7 W.

CHAINS

N. 1° 01' W., bet. secs. 29 and 30.

Over desert mountain land, through scattered timber and medium dense undergrowth; asc. 75 ft. over SE. slope, along a fence line.

10.40 Spur, projects NE.; desc. 160 ft. over NW. slope.

38.40 The 1/4 sec. cor. of secs. 29 and 30, monumented with a sandstone, 25x9x5 ins., firmly set in the ground and mkd. 1/4 on the W. face (record reports a cobblestone 25x9x5 ins.).

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.

T9S R7W

½

S30 | S29

1965

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of the cor.

Bury the original cor. alongside the iron post.

N. 0° 12' E., beginning new measurement.

Over desert mountain land, through scattered timber; desc. 95 ft. over NW. slope.

20.10 Wash, 4 ft. deep, 40 lks. wide, in bottom of draw, drains NE.; asc. 30 ft. over SE. slope.

40.14 The cor. of secs. 19, 20, 29 and 30, monumented with a sandstone, 15x10x8 ins., firmly set in the ground and mkd. with 2 notches on the S. and 5 notches on the E. edge.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 18 ins. in the ground, to solid rock and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T9S R7W

S19 | S20

S30 | S29

1965

Bury the original cor. in the mound alongside the iron post.

The above cor. is set at a fence cor. bearing N. and E.

Dependent Resurvey of a Portion of the
Subdivision of T. 9 S., R. 7 W.

CHAINS

Land, rolling desert mountain.
Soil, rocky, sandy clay.
Timber, scattered juniper.
Undergrowth, medium dense sagebrush and grass.

From the cor. of secs. 20, 21, 28 and 29.

N. 89° 56' W., bet. secs. 20 and 29.

Over desert mountain land, through scattered timber
and dense undergrowth; asc. 60 ft. over E. slope.

13.00 Low spur, projects N. 20° E.; desc. 40 ft. over NW.
slope.

19.60 Draw, drains NE.; asc. 85 ft. over E. slope.

28.40 Spur, projects N. 10° E.; desc. 80 ft. over NW. slope.

40.13 The 1/4 sec. cor. of secs. 20 and 29, monumented with
a limestone, 12x10x9 ins., firmly set in the ground and
mkd. 1/4 on the N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24
ins. in the ground and in a collar of stone, with brass
cap mkd.

T9S R7W

½ — S20
S29

1965

Bury the original cor. alongside the iron post.

S. 89° 46' W., beginning new measurement.

Over desert mountain land; desc. 50 ft. over NW. slope.

3.80 Draw, drains N. 10° E.; asc. 175 ft. over E. slope.

15.40 Spur, projects N.; desc. 80 ft. over NW. slope.

30.80 Draw, drains irregularly N.; asc. 65 ft. over E. slope,
along a fence line.

40.12 The cor. of secs. 19, 20, 29 and 30.

Land, desert mountains.
Soil, rocky clay.
Timber, scattered juniper.
Undergrowth, medium dense sagebrush and grass.

S. 89° 52' W., bet. secs. 19 and 30.

Dependent Resurvey of a Portion of the
Subdivision of T. 9 S., R. 7 W.

CHAINS

- Over desert mountain land, through medium dense timber;
desc. 85 ft. over W. slope.
- 6.80 Draw, drains irregularly N.; asc. 115 ft. over E. slope.
- 14.90 Spur, projects N.; desc. 40 ft. over NW. slope.
- 19.50 Small draw, drains N.; asc. 50 ft. over NE. slope.
- 24.40 Spur, projects N.; desc. 80 ft. over W. slope.
- 31.50 Draw, drains N.; asc. 40 ft. over NE. slope.
- 37.60 Spur, with dirt road, on top, bears N. and S.
- 39.77 Point for the 1/4 sec. cor. of secs. 19 and 30, at
proportionate distance; there is no remaining evidence
of the original cor.
- Set an iron post, 30 ins. long, 2½ ins. in diam., 16
ins. in the ground, to solid rock and in a mound of
stone, 3 ft. base to top, with brass cap mkd.
- T9S R7W
½ $\frac{S19}{S30}$
1965
- Desc. 70 ft. over NW. slope.
- 48.30 Draw, drains N.; asc. 40 ft. over NE. slope.
- 52.00 Low spur, projects N.; desc. 40 ft. over W. slope.
- 55.00 Small draw, drains NE.; asc. 90 ft. over E. slope.
- 66.00 Spur, projects NE.; desc. 40 ft. over NW. slope.
- 73.50 Draw, drains NE.; asc. 50 ft. over E. slope.
- 79.24 The cor. of secs. 19, 24, 25 and 30, on the W. bdy. of
the Tp., previously described.
- Land, desert mountains.
Soil, rocky, clay.
Timber, dense juniper.
Undergrowth, medium to scattered sagebrush and grass.
- From the cor. of secs. 19, 20, 29 and 30.
- N. 0° 32' W., bet. secs. 19 and 20.
- Over desert mountain land, through dense timber; desc.
70 ft. over NW. slope, along a fence line.
- 20.65 Wire fence bears S. and W.; desc. 70 ft. over NW. slope.

Dependent Resurvey of a Portion of the
Subdivision of T. 9 S., R. 7 W.

CHAINS

40.05

The 1/4 sec. cor. of secs. 19 and 20, monumented with a sandstone, 20x8x6 ins., firmly set in the ground and mkd. 1/4 on the W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 26 ins. in the ground, with brass cap mkd:

T9S R7W

½

S19 | S20

1965

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of the cor.

Bury the original cor. alongside the iron post.

Trees are too scrubby to mark.

N. 1° 26' E., beginning new measurement over desert mountain land; desc. 130 ft. over NW. slope.

21.40

Draw, drains N. 10° E.; asc. 20 ft. along E. slope.

26.40

Small spur, projects NE.; desc. 30 ft. over NW. slope.

35.20

Small draw, drains NE.; asc. 15 ft. over SE. slope.

39.88

The cor. of secs. 17, 18, 19 and 20, monumented with a white flintstone, 24x14x10 ins., firmly set in the ground and mkd. with 5 notches on the E. and 3 notches on the S. edges. No trace of the two original bearing trees was found, a considerable amount of timber for use as fence posts has been cut in the area.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 26 ins. in the ground, with brass cap mkd.

T9S R7W

S18 | S17

S19 | S20

1965

Raise a mound of stone, 3 ft. base, two ft. high, W. of the cor.

Bury the original cor. alongside the iron post.

Land, desert mountains.

Soil, rocky, clay.

Timber, scattered to dense juniper.

Undergrowth, medium dense sagebrush and grass.

From the cor. of secs. 16, 17, 20 and 21.

Dependent Resurvey of a Portion of the
Subdivision of T. 9 S., R. 7 W.

CHAINS

S. 89° 43' W., bet. secs. 17 and 20.

Over desert mountain land, through scattered juniper and medium dense undergrowth; desc. 60 ft. over W. slope.

- 15.85 Dirt road, bears irregularly N. and S.; desc. 20 ft. over W. slope.
- 19.70 Government Creek, drains irregularly N., wire fence bears N. 20° W. and S. 20° E., 90 lks. to cor. of fence bears E.; asc. 50 lks. over E. slope.
- 28.00 Spur, projects N.; desc. 25 ft. over W. slope.
- 40.03 Point for the 1/4 sec. cor. of secs. 17 and 20, at proportionate distance; there is no remaining evidence of the original cor.
- Set an iron post, 30 ins. long, 2½ ins. in diam., 26 ins. in the ground, with brass cap mkd.

T9S R7W

¼ S17
S20
1965

Raise a mound of stone, 4 ft. base, 3 ft. high, N. of the cor.

- 40.50 Wash, 2 ft. deep, 20 lks. wide, drains irregularly NE.; asc. 50 ft. along NE. changing to E. slope.
- 65.50 Spur, projects N.; desc. 60 ft. over W. slope.
- 73.30 Draw, drains N. 5° E.; asc. 50 ft. over E. slope.
- 80.06 The cor. of secs. 17, 18, 19 and 20.
- Land, desert mountains.
Soil, rocky, clay.
Timber, scattered juniper.
Undergrowth, medium dense sagebrush and grass.

N. 89° 51' W., bet. secs. 18 and 19.

Over gently rolling desert mountain land, through scattered timber; asc. 40 ft. over E. slope.

- 11.20 Spur, projects N.; desc. 50 ft. over NW. slope.
- 17.70 Draw, drains irregularly N.; asc. 60 ft. over E. slope.
- 23.00 Spur, projects N.; enter dense timber; desc. 15 ft. over W. slope.
- 27.00 Unimproved dirt road, bears irregularly N. and S.; thence along a broken N. slope.

Dependent Resurvey of a Portion of the
Subdivision of T. 9 S., R. 7 W.

CHAINS

40.16

The 1/4 sec. cor. of secs. 18 and 19, monumented with a flintstone, 15x12x10 ins., firmly set in the ground and mkd. 1/4 on the N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 16 ins. in the ground, to solid rock and in a mound of stone, 4 ft. base, to top, with brass cap mkd.

T9S R7W

¼ S18
S19

1966

Bury the original cor. alongside the iron post.

N. 89° 56' W., beginning new measurement.

Over desert mountain land; asc. 20 ft. over E. slope.

3.20

Dirt road, on top of spur, projects N.; desc. 50 ft. over W. slope.

14.70

Draw, drains N.; asc. 50 ft. over NE. slope.

40.18

The cor. of secs. 13, 18, 19 and 24, on the W. bdy. of the Tp., previously described.

Land, rolling desert mountain.

Soil, rocky, clay.

Timber, scattered to dense juniper.

Undergrowth, medium sagebrush and grass.

From the cor. of secs. 17, 18, 19 and 20.

N. 0° 03' W., bet. secs. 17 and 18.

Over desert mountain land, through dense timber; asc. 30 ft. over SE. slope.

2.90

Small spur, projects NE.; desc. 40 ft. along NE. slope.

25.00

Slope changes to N.; desc. 40 ft.

40.48

The 1/4 sec. cor. of secs. 17 and 18, monumented with a limestone, 12x10x8 ins., firmly set in the ground and mkd. 1/4 on the W. face (record reports a limestone 18x12x7 ins.).

No trace of the original bearing trees was found.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 26 ins. in the ground, with brass cap mkd.

T9S R7W

¼ S18
S17

1966

Dependent Resurvey of a Portion of the
Subdivision of T. 9 S., R. 7 W.

CHAINS

Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high
W. of the cor.

Bury the original cor. alongside the iron post.

N. $0^{\circ} 06'$ E., beginning new measurement.

Over desert mountain land; desc. 65 ft. over N. slope.

20.27 Barbed wire fence, bears E. and W.; desc. 75 ft. over
N. slope.

40.34 The cor. of secs. 7, 8, 17 and 18, monumented with a
flintstone, $12 \times 10 \times 8$ ins., firmly set in the ground and
mkd. with 5 notches on the E. and 4 notches on the S.
edge. (Record reports a sandstone $15 \times 8 \times 6$ ins.) No
trace of the original bearing trees was found.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 26
ins. in the ground, with brass cap mkd.

T9S R7W

S7	S8
S18	S17

1965

Raise a mound of stone, 3 ft. base, 2 ft. high,
W. of the cor.

Bury the original cor. alongside the iron post.

Land, desert mountains.

Soil, rocky, clay.

Timber, dense and scattered juniper.

Undergrowth, scattered sagebrush and grass.

From the cor. of secs. 8, 9, 16 and 17.

N. $89^{\circ} 57'$ W., bet. secs. 8 and 17.

Over rolling land that has been cleared of timber and
reseeded to grass; desc. 135 ft. over W. slope.

39.80 Improved dirt road, bears irregularly N. and S.

40.05 Point for the $\frac{1}{4}$ sec. cor. of secs. 8 and 17, at pro-
portionate distance; there is no remaining evidence of
the original cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 26
ins. in the ground, with brass cap mkd.

T9S R7W

$\frac{1}{2}$	S8
	S17

1965

Dependent Resurvey of a Portion of the
Subdivision of T. 9 S., R. 7 W.

CHAINS	
	<p>Raise a mound of stone, 3 ft. base, 2½ ft. high, N. of the cor.</p> <p>Enter scattered juniper; desc. 40 ft. over W. slope.</p>
58.57	Wire fence, bears N. and S.; desc. 30 ft. over W. slope.
63.37	Government Creek, dry, wash 4 ft. deep, 50 lks. wide, drains N.; asc. 50 ft. over NE. slope.
67.40	Spur, projects N.; desc. 10 ft. along N. slope.
80.10	The cor. of secs. 7, 8, 17 and 18.
	<p>Land, rolling desert bench. Soil, rocky, clay. Timber, none the first one half mile, scattered juniper the balance. Undergrowth, dense grass the first one half mile medium grass and sagebrush the balance.</p>
	<p>S. 89° 55' W., bet. secs. 7 and 18.</p> <p>Over gently rolling desert bench land, through dense timber; desc. 20 ft. over gentle NW. slope.</p>
5.00	Draw, drains irregularly N.; asc. 45 ft. along gentle N. slope.
18.00	Unimproved dirt road, bears N. and S.; continue along N. slope.
19.80	Unimproved dirt road, bears N. and S.; continue along N. slope.
36.70	Top of rise, slopes N.; desc. 10 ft. along N. slope.
41.31	Point for the 1/4 sec. cor. of secs. 7 and 18, determined latitudinally by adjacent section corm. and longitudinally by a barbed wire property line fence, bearing N. and S.
	<p>Set an iron post, 30 ins. long, 2½ ins. in diam., 26 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T9S R7W</p> <p style="text-align: center;">¼ $\frac{S7}{S18}$</p> <p style="text-align: center;">1966</p>
	<p>S. 89° 55' W., beginning new measurement.</p> <p>Over nearly level desert land, through scattered timber, along gentle N. slope.</p>
15.90	Wash, 2 ft. deep, 15 lks. wide, drains irregularly N.
22.80	Enter dense timber.

Dependent Resurvey of a Portion of the
Subdivision of T. 9 S., R. 7 W.

CHAINS

- 25.40 Lee Creek, wash, 3 ft. deep, 20 lks. wide, drains N.
- 35.00 Unimproved dirt road, bears N. and curves SW.
- 39.39 The cor. of secs. 7, 12, 13 and 18, on the W. bdy. of the Tp., previously described.
- Land, nearly level desert.
Soil, sandy clay.
Timber, scattered to dense juniper.
Undergrowth, medium dense sagebrush and grass.
- From the cor. of secs. 7, 8, 17 and 18.
- N. 0° 08' W., bet. secs. 7 and 8.
- Over desert land, through scattered timber; desc. 10 ft. over gentle N. slope.
- 9.10 Wash, 8 ft. deep, 20 lks. wide, drains NE.; desc. 45 ft. over N. slope.
- 27.39 Underground pipeline, bears NE. and SW.; desc. 30 ft. over N. slope; leave timber.
- 40.17 Point for the 1/4 sec. cor. of secs. 7 and 8, at proportionate distance; there is no remaining evidence of the original cor.
- Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.
- T9S R7W
½
S7|S8
1965
- Raise a mound of stone, 3 ft. base, 2 ft. high, W. of the cor.
- Desc. 30 ft. over gentle N. slope.
- 53.00 Government Creek, dry wash, 3 ft. deep, 20 lks. wide, drains N. 10° W.
- 58.10 Improved dirt road, bears irregularly E. and W.
- 60.28 Cor. of fences, bears E., W. and N.
- 73.10 Wash, 3 ft. deep, 50 lks. wide, drains W. about 2½ chs. into Government Creek.
- 80.34 The cor. of secs. 5, 6, 7 and 8, monumented with a sandstone, 12x8x4 ins., firmly set in the ground and mkd. with 5 notches on the E. and S. edges. (Record reports a limestone, 18x8x5 ins.)
- At the cor. point

Dependent Resurvey of a Portion of the
Subdivision of T. 9 S., R. 7 W.

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 26 ins. in the ground with brass cap mkd.

T9S R7W

S6	S5
S7	S8

1965

Set a steel fence post, 2 lks. W. of the cor.

Bury the original cor. alongside the iron post.

Land, nearly level desert.

Soil, sandy clay.

Timber, scattered juniper the first one half mile, none the balance.

From the cor. of secs. 4, 5, 8 and 9.

N. $89^{\circ} 57'$ W., bet. secs. 5 and 8.

Over nearly level desert land, through scattered juniper and medium dense undergrowth; desc. 10 ft. over gentle W. slope, along N. side of fence line.

2.50 Wash, 2 ft. deep, 20 lks. wide, drains irregularly NW.; desc. 85 ft. over gentle W. slope.

40.49 Point for the $\frac{1}{4}$ sec. cor. of secs. 5 and 8, at proportionate distance; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 26 ins. in the ground, with brass cap mkd.

T9S R7W

$\frac{1}{2}$	S5
	S8

1965

Raise a mound of stone, 3 ft. base, 2 ft. high, N. of the cor.

Desc. 40 ft. over N. slope, along N. side of fence line.

55.90 Dirt road, bears irregularly N. and S.

61.48 Wire fence bears N. and S.

80.98 The cor. of secs. 5, 6, 7 and 8.

Land, gently rolling desert.

Soil, sandy clay.

Timber, scattered juniper.

Undergrowth, medium dense sagebrush and grass.

S. $89^{\circ} 34'$ W., bet. secs. 6 and 7.

Over nearly level desert land.

Dependent Resurvey of a Portion of the
Subdivision of T. 9 S., R. 7 W.

CHAINS

- 6.10 Wire fence, bears NW. and SE.
- 12.50 Government Creek, drains N. 30° W.; enter cultivated land.
- 40.00 Leave cultivated land; enter dense brush.
- 40.85 Point for the 1/4 sec. cor. of secs. 6 and 7, determined latitudinally by adjacent section cors. and longitudinally by a barbed wire property line fence bearing N. and S.

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.

T9S R7W
 ¼ S6
 S7
 1965

S. 89° 34' W., beginning new measurement.

Over nearly level desert land, through medium dense undergrowth.

- .80 Dirt road, bears irregularly N. and S.
- 32.02 Wire fence bears NE. and SW.
- 40.02 The cor. of secs. 1, 6, 7 and 12, on the W. bdy. of the Tp., previously described.

Land, nearly level desert.
 Soil, sandy clay.
 No timber.
 Undergrowth, medium dense sagebrush, shadscale and grass.

From the cor. of secs. 5, 6, 7 and 8.

N. 0° 27' W., bet. secs. 5 and 6.

Over nearly level desert land, through medium dense undergrowth.

- 20.10 Wire fence, bears E. and W.
- 20.20 Unimproved dirt road, bears E. and W. along fence.
- 40.24 The 1/4 sec. cor. of secs. 5 and 6, monumented with a sandstone, 15x9x6 ins., firmly set in the ground and mkd. 1/4 on the W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 26 ins. in the ground, with brass cap mkd.

Dependent Resurvey of a Portion of the
Subdivision of T. 9 S., R. 7 W.

CHAINS

T9S R7W

 $\frac{1}{2}$
S6 | S5

1965

Set a juniper post, 1 lk. E. of the cor.

Bury the original cor. alongside the iron post.

N. 0° 54' W., beginning new measurement.

Over nearly level desert land, through medium dense undergrowth.

27.60 Wash, 3 ft. deep, 10 lks. wide, drains NW.

39.52 The cor. of secs. 5, 6, 31 and 32, on the N. bdy. of the Tp., previously described.

Land, nearly level desert.

Soil, sandy clay.

Timber, none.

Undergrowth, medium dense shadscale, sagebrush and grass.

General Description

A considerable variety of land and soil is found in Township 9 South, Range 7 West. The general elevation of the township ranges from about 8,400 ft. above sea level at the top of Lookout Mountain, in Section 1, to about 5,200 ft. above sea level at the NW. cor. of Section 6. The NE. portion of the township is rough broken mountains with the remainder of the township being rolling hills and gently sloping desert bench land. The NE. portion of the township supports a medium dense growth of pine, pinon and patches of aspen and mahogany. The rest of the township is covered with dense to scattered juniper with no timber in the NW. cor. of the township. The undergrowth is mainly sagebrush and grass, with lesser amounts of shadscale, oak, wild apple and maple. A number of small streams or springs were noted throughout the township. There is one permanent habitation, the James Ranch, located in the NE. portion of Section 7.

CHAINS

Blank

Page

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS

NAMES	CAPACITY
Morris E. Blackburn	Surveying Technician
Lavern Griffin	Surveying Aid
Robert D. Allen	Surveying Aid
Steven L. Savage	Surveying Aid
Chad M. Smith	Surveying Aid
Gerald E. Smith	Surveying Aid

CERTIFICATE OF SURVEY

I, Glen B. Hatch, HEREBY CERTIFY upon honor that,
in pursuance of special instructions bearing date of the 18 day of May, 19 65,

I have dependently resurveyed the North and West boundaries, a portion of the South and East boundaries, a portion of the subdivisional lines, and surveyed a portion of the East boundary and a portion of the subdivisional lines, of Township 9 South, Range 7 West.

of the Salt Lake Meridian, in the State of Utah, which
are represented in the foregoing field notes as having been executed by me and under my direction;
and that said survey has been made in strict conformity with said special instructions, the Manual
of Instructions for the Survey of the Public Lands of the United States, and in specific manner
described in the foregoing field notes.

(Date)
April 17, 1967
(Date)

(Cadastral Surveyor)
Glen B. Hatch
(Cadastral Surveyor)
SUPERVISORY

CERTIFICATE OF APPROVAL

SUBMITTED FOR APPROVAL
Date DEC 22 1967

BUREAU OF LAND MANAGEMENT,
Washington, D. C.

The foregoing field notes of the North, the West, the East, the east 5 miles of the South boundary and a portion of the subdivisional lines of Township 9 South, Range 7 West of the Salt Lake Meridian, Utah

executed by Glen B. Hatch, Supervisory Cadastral Surveyor
having been critically examined and found correct, are hereby approved.

(Date)

(Chief, Division of Engineering)

CERTIFICATE OF TRANSCRIPT

_____, is a true copy of the original field notes.

Blank

Page

Blank

Page

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
ORIGINAL

FIELD NOTES

OF THE
SURVEY OF THE

COMPLETION OF THE

SUBDIVISIONAL LINES

OF

TOWNSHIP 12 SOUTH, RANGE 7 WEST

Of the SALT LAKE Meridian,

In the State of UTAH

EXECUTED BY

GLEN B. HATCH SUPERVISORY CADASTRAL SURVEYOR

Under special instructions dated NOVEMBER 3, 19 67, which provided for the surveys
included under Group Number 497, approved NOVEMBER 6, 1967
and assignment instructions dated NOVEMBER 6, 19 67.

Survey commenced NOVEMBER 8, 19 67

INDEX DIAGRAM

Township 12 SOUTH, Range 7 WEST,

6 34	36 5 33	25 4 24	3 20	2	1 8
7 32	33 8 31	23 9	10 18	19 11 17	7 12 6
18 29	30 17 29	16	15 15	16 14 15	5 12 4
19 27	28 20 27	22 21 22	22 13	14 23 12	3 24 2
30 25	26 29	21 28 20	27 10	11 26 9	1 25
31	32	35	34	9 33	36

Township 12 South, Range 7 West

CHAINS

The South boundary was surveyed by Joseph Gorlinski in 1873 and resurveyed by Elliott Bird and Andrew Nelson in 1941. The East boundary was surveyed by Boyd S. Owens in 1960. The North boundary was surveyed by Howard W. Miller and Isaac Hayes in 1915. The West boundary was surveyed by Joseph Gorlinski in 1876 and resurveyed by Boyd S. Owens in 1960. The Third Meridian Line and sections 2, 16, 32 and 36 were surveyed by Boyd S. Owens in 1960. The following field notes are those of the survey of the completion of the subdivisional lines of Township 12 South, Range 7 West.

The survey was conducted in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1947, and special instructions dated November 3, 1967.

All lines of this survey were run by direct method where the lines were accessible; lines inaccessible were run by triangulation methods. The details of such triangulations have been thoroughly checked and verified and the details are omitted from these field notes.

The direction of the lines of this survey were determined on line by hour angle observations on Polaris. The lines were carried forward by sustained angulation.

The geographic position of the southeast corner of the township is at Latitude $39^{\circ} 43' 37.6''$ N. and Longitude $112^{\circ} 34' 25.0''$ W., as computed in 1960 from section line ties to U.S.G.S. Triangulation Station "Trail," at Latitude $39^{\circ} 46' 53.333''$ N. and Longitude $112^{\circ} 35' 37.150''$ W., located S. $77^{\circ} 37' 30''$ W., 88.33 chs. dist. from the cor. of secs. 12 and 13, on the E. bdy. of the township.

The magnetic declination was read at several stations throughout the township and the average of these readings was found to be $16^{\circ} 45'$ East.

Survey of the Subdivision, Township 12 South, Range 7 West

Beginning at the cor. of secs. 25, 26, 35 and 36, monumented with an iron post, $2\frac{1}{2}$ ins. diam., set, mkd. and witnessed as described in the official record of the 1960 survey.

N. $0^{\circ} 07'$ E., bet. secs. 25 and 26.

Over gently rolling land through shadscale and sagebrush undergrowth.

27.00 Wash, 15 lks. wide, 3 ft. deep, drains S. 45° W.

39.35 Wash, 10 lks. wide, 1 ft. deep, drains S. 50° W.

40.00 Point for the $1/4$ sec. cor. of secs. 25 and 26.

Survey of the Subdivision,
Township 12 South, Range 7 West

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T12S R7W

$$\frac{1}{2}$$

S26	S25
-----	-----

1967

Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

- 49.40 Wash, 40 lks. wide, 4 ft. deep, drains S. 80° W.
 57.05 Improved dirt road to Delta, bears N. 22° E. and S. 22° W.
 58.40 Wash, 10 lks. wide, 2 ft. deep, drains S. 40° W.
 69.90 Wash, 10 lks. wide, 4 ft. deep, drains West about 50 lks; thence S. 45° W.
 80.00 Point for the cor. of secs. 23, 24, 25 and 26.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T12S R7W

<u>S23</u>	<u>S24</u>
S26	S25

1967

Raise a mound of stone, $2\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

Land, gently rolling desert.
 Soil, sandy.
 No timber.
 Undergrowth, shadscale, sagebrush and grass.

From the cor. of secs. 24 and 25, on the E. bdy. of the Tp., monumented with an iron post, $2\frac{1}{2}$ ins. diam., set, mkd. and witnessed as described in the official record of the 1960 survey.

N. $89^\circ 57'$ W., bet. secs. 24 and 25.

Over rolling desert land through shadscale and sagebrush undergrowth. Descend 45 ft. along N. side of large draw draining nearly West.

- 10.00 Wash, 10 lks. wide, 2 ft. deep, drains South 50 lks. to large wash draining nearly West.
 18.60 Wash, drains South 1.00 ch. to large wash.
 19.60 Point of low spur, 10 ft. high, slopes S. 1.00 ch.
 22.55 Wash, 25 lks. wide, 5 ft. deep, drains S. 45° W., 1.50 chs. to large wash.

Survey of the Subdivision
Township 12 South, Range 7 West

CHAINS	
24.15	Wash, 5 lks. wide, 1 ft. deep, drains S. 1.00 ch. to large wash.
26.45	Wash, 5 lks. wide, 1 ft. deep, drains S. 10° W. to large wash.
27.95	Wash, 15 lks. wide, 5 ft. deep, drains S. 10° W., 2.50 chs. to large wash.
33.95	Small hollow, drains S. 20° W., 2.50 chs. to large wash; asc. 20 ft. over SE. slope.
38.05	Small spur, slopes S. 20° W.; desc. 20 ft. over NW. slope.
40.03	Point for the 1/4 sec. cor. of secs. 24 and 25. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground with brass cap mkd.
	T12S R7W
	1/4 $\frac{S24}{S25}$
	1967
	Raise a mound of stone, 2½ ft. base, 1½ ft. high, N. of cor.
41.60	Bottom of small hollow, drains S. 45° W.; asc. 15 ft. over SE. slope.
47.65	Spur, slopes South 4.00 chs. to end; desc. 50 ft. over NW. slope.
52.00	Wash, 20 lks. wide, 3 ft. deep, drains S. 50° W.; desc. 50 ft. over gently rolling desert land.
62.20	Trail road, bears N. 45° W. and S. 45° E.
63.45	Wash, 10 lks. wide, 2 ft. deep, drains S. 45° W.
72.20	Improved dirt road to Delta, bears N. 22° E. and S. 22° W.
80.06	The cor. of secs. 23, 24, 25 and 26.
	Land, rolling desert. Soil, sandy. No timber. Undergrowth, shadscale, sagebrush and grass.
	N. 0° 07' E., bet. secs. 23 and 24.
	Over rolling desert land through shadscale and sagebrush undergrowth. Descend 15 ft. over NW. slope.
5.80	Wash, 40 lks. wide, 4 ft. deep, drains S. 45° W.; asc. 85 ft. over SE. slope.

Survey of the Subdivision,
Township 12 South, Range 7 West

CHAINS

- 27.40 Point of spur, slopes E. 2.00 chs. to end; desc. 30 ft. over NE. slope.
- 30.55 Wash, 15 lks. wide, 3 ft. deep, drains S. 45° E.
- 40.00 Point for the 1/4 sec. cor. of secs. 23 and 24.
Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
- T12S R7W
½
S23|S24
1967
- Raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor.
- Asc. 90 ft. over gently rolling desert land.
- 45.00 Trail road, bears E. and W.
- 47.90 Wash, 10 lks. wide, 3 ft. deep, drains S. 30° W.
- 50.50 Trail road, bears E. and W.
- 80.00 Point for the cor. of secs. 13, 14, 23 and 24.
Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
- T12S R7W
S14|S13
S23|S24
1967
- Raise a mound of stone, 3 ft. base, 1½ ft. high, W. of cor.
- Land, gently rolling desert.
Soil, sandy.
No timber.
Undergrowth, shadscale, sagebrush and grass.
- From the cor. of secs. 13 and 24, on the E. bdy. of the Tp., monumented with an iron post, 2½ ins. diam., set, mkd. and witnessed as described in the official record of the 1960 survey.
- West, bet. secs. 13 and 24.
- Over rolling mountain land through shadscale and sagebrush undergrowth; desc. 105 ft. over W. slope.
- 11.35 Wash, 15 lks. wide, 3 ft. deep, drains S.; asc. 60 ft. over NE. slope.
- 18.20 Spur, slopes N. 45° W.; desc. 40 ft. over SW. slope.

Survey of the Subdivision,
Township 12 South, Range 7 West

CHAINS	
20.35	Draw, drains N. 45° W; asc. 20 ft. over NE. slope.
22.35	Spur, slopes N.; desc. 40 ft. over W. slope.
24.85	Draw, drains N.; asc. 50 ft. over E. slope.
29.15	Spur, slopes N. 20° W.; desc. 130 ft. over NW. slope.
34.90	Wash, drains N. 30° W., continue descent over NW. slope.
40.09	Point for the 1/4 sec. cor. of secs. 13 and 24. Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground to bedrock, and in a mound of stone, 3½ ft. base to top, with brass cap mkd.
	T12S R7W
	¼ $\frac{S13}{S24}$ 1967
	Desc. 50 ft. over NW. slope.
43.20	Wash, 15 lks. wide, 4 ft. deep, drains N. 10° W.; asc. 20 ft. over NE. slope.
45.55	Spur, slopes N.; desc. 20 ft. over NW. slope.
48.15	Wash, 10 lks. wide, 3 ft. deep, drains S. 30° W.; asc. 10 ft. over SE. slope.
53.15	Top of ascent, slopes S.; desc. 45 ft. along S. slope.
57.10	Wash, 10 lks. wide, 1 ft. deep, drains S.
61.60	Improved dirt road to Delta, bears nearly N. and S.
63.10	Wash, 5 lks. wide, 1 ft. deep, drains S.; asc. 45 ft. over NE. slope.
68.10	Spur, slopes S. 40° E.; desc. 40 ft. over SW. slope.
72.90	Wash, 10 lks. wide, 2 ft. deep, drains S. 30° W.
80.18	The cor. of secs. 13, 14, 23 and 24. Land, rolling mountains. Soil, sandy and rocky. No timber. Undergrowth, shadscale, sagebrush and grass.
	N. 0° 07' E., bet. secs. 13 and 14. Over rolling desert land through widely scattered juniper timber and shadscale and sagebrush undergrowth; asc. 100 ft. over SW. slope.
4.90	Trail road, bears S. 30° W. and N. 30° E.

Survey of the Subdivision,
Township 12 South, Range 7 West

CHAINS

- 28.00 Base of mountains bears E. and W.; asc. 375 ft. over steep and broken S. slope.
- 40.00 Point for the 1/4 sec. cor. of secs. 13 and 14.
Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., on solid stone, and in a mound of stone, 4 ft. base to top, with brass cap mkd.
- T12S R7W
 $\frac{1}{2}$
S14|S13
1967
- By triangulation; asc. about 400 ft. over broken and ledgy S. slope.
- 55.10 Rocky, broken ridge, bears E. and W., end triangulation; desc. 100 ft. over broken NE. slope.
- 62.00 Draw, drains E.; desc. 160 ft. over broken NE. slope.
- 79.87 Point selected for the witness cor. of secs. 11, 12, 13 and 14.
Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., on solid rock shelf, and in a mound of stone, $3\frac{1}{2}$ ft. base to top, with brass cap mkd.
- T12S R7W
W↑C
S11|S12
S14|S13
1967
- 80.00 Point for the cor. of secs. 11, 12, 13 and 14, falls on near vertical ledge and cannot be perpetuated.
Land, rolling desert S. 28.00 chs.; broken mountains N. 52.00 chs.
Soil, rocky.
Timber, widely scattered scrub juniper.
Undergrowth, sagebrush and shadscale.
- From the cor. of secs. 12 and 13, on the E. bdy. of the Tp., monumented with an iron post, $2\frac{1}{2}$ ins. diam., set, mkd. and witnessed as described in the official record of the 1960 survey.
- S. $89^{\circ} 55'$ W., bet. secs. 12 and 13.
Over mountainous land through widely scattered juniper timber and sagebrush and shadscale undergrowth; desc. 15 ft. over W. slope.
- 1.50 Wash, 10 lks. wide, 2 ft. deep, drains N.; asc. 60 ft. over E. slope.
- 8.55 Spur, slopes N. 40° E.; desc. 50 ft. over NW. slope.

Survey of the Subdivision,
Township 12 South, Range 7 West

CHAINS	
12.40	Wash, 15 lks. wide, 2 ft. deep, drains N.; asc. 150 ft. over NE. slope.
23.00	Spur, slopes N. 20° W.; desc. 105 ft. over W. slope.
28.80	Wash, 5 lks. wide, 1 ft. deep, drains N.; asc. 30 ft. over E. slope.
32.40	Spur, slopes N.; desc. 60 ft. over W. slope.
34.85	Wash, 15 lks. wide, 2 ft. deep, drains N.; asc. 15 ft. over NE. slope.
40.08	Point for the 1/4 sec. cor. of secs. 12 and 13. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">T12S R7W</p> $\frac{1}{4} \begin{array}{l} \text{S12} \\ \text{S13} \end{array}$ <p style="text-align: center;">1967</p>
	<p style="text-align: center;">Raise a mound of stone, 3 ft. base, 1½ ft. high, N. of cor.</p>
42.15	Improved dirt road to Delta, bears N. 50° E. and S. 50° W.
43.15	Wash, 15 lks. wide, 2 ft. deep, drains N. 45° E.
48.55	Improved dirt road to Delta, bears N. 8° W. and S. 8° E.; thence by triangulation; asc. about 600 ft. over broken and ledgy NE. slope.
80.16	True point for the cor. of secs. 11, 12, 13 and 14. Land, rolling E. portion; broken, ledgy W. portion. Soil, sandy. Timber, widely scattered scrub juniper. Undergrowth, sagebrush and shadscale.
	N. 0° 05' E., bet. secs. 11 and 12.
	Over broken mountain land through widely scattered scrub juniper timber. By triangulation; asc. about 200 ft. over broken SE. slope.
40.04	Point for the 1/4 sec. cor. of secs. 11 and 12. End triangulation. Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.
	<p style="text-align: center;">T12S R7W</p> $\frac{1}{4} \text{S11} \text{S12}$ <p style="text-align: center;">1967</p>
	Asc. 90 ft. over SE. slope.

Survey of the Subdivision,
Township 12 South, Range 7 West

CHAINS

- 47.75 Spur, slopes N. 45° E.; desc. 30 ft. over NE. slope.
 49.75 Small draw, drains E.; asc. 35 ft. over SE. slope.
 52.85 Spur, slopes S. 40° E.; desc. 290 ft. over NE. slope.
 59.60 Draw, drains N. 45° E.; desc. 155 ft. over NE. slope.
 80.08 The cor. of secs. 1, 2, 11 and 12, monumented with an iron post, 2½ ins. diam., set, mkd. and witnessed as described in the official record of the 1960 survey.

Land, broken and mountainous.
 Soil, rocky.
 Timber; widely scattered scrub juniper.
 Undergrowth; shadscale and sagebrush.

From the cor. of secs. 1 and 12, on the E. bdy. of the Tp., monumented with an iron post, 2½ ins. diam., set, mkd. and witnessed as described in the official record of the 1960 survey.

S. 89° 58' W., bet. secs. 1 and 12.

Asc. 35 ft. over gently rolling desert land through shadscale and sagebrush undergrowth.

- 40.01 Point for the 1/4 sec. cor. of secs. 1 and 12.
 Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T12S R7W

½ S1
 S12
 1967

Raise a mound of stone, 2½ ft. base, 1½ ft. high, N. of cor.

Asc. 25 ft. over gently rolling land.

- 48.00 Graded gravel road to Jericho, bears N. 55° W. and S. 55° E.
 64.40 Graded gravel road to Delta, bears N. and S.
 80.02 The cor. of secs. 1, 2, 11 and 12.
 Land, gently rolling desert.
 Soil, sandy.
 No timber.
 Undergrowth, shadscale, sagebrush and grass.

Survey of the Subdivision,
Township 12 South, Range 7 West

CHAINS

From the cor. of secs. 2, 3, 34 and 35, on the S. bdy. of the Tp., monumented with an iron post, 2 ins. diam., set, mkd. and witnessed as described in the official record of the 1941 survey.

N. 0° 07' E., bet. secs. 34 and 35.

Asc. 65 ft. over gently rolling land through shadscale and sagebrush undergrowth.

- 1.50 Wash, 10 lks. wide, 1 ft. deep, drains S. 10° W.
 17.30 Wash, 20 lks. wide, 3 ft. deep, drains S. 80° W.
 21.05 Wash, 20 lks. wide, 2 ft. deep, drains S. 80° W.
 30.95 Wash, 10 lks. wide, 1 ft. deep, drains S. 45° W.
 36.15 Wash, 10 lks. wide, 1 ft. deep, drains S. 30° W.
 40.00 Point for the 1/4 sec. cor. of secs. 34 and 35.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T12S R7W

½

S34|S35

1967

Raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor.

Asc. 100 ft. over gently rolling SW. slope.

- 53.15 Wash, 15 lks. wide, 2 ft. deep, drains S. 30° W. from N. 30° E.
 59.24 Same wash, drains S. 10° E. from N. 15° E.
 80.00 Point for the cor. of secs. 26, 27, 34 and 35.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T12S R7W

S27|S26

S34|S35

1967

Raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor.

Land, gently rolling.

Soil, sandy.

No timber.

Undergrowth, shadscale, sagebrush and grass.

From the cor. of secs. 25, 26, 35 and 36.

S. 89° 58' W., bet. secs. 26 and 35.

Survey of the Subdivision,
Township 12 South, Range 7 West

CHAINS

Desc. 110 ft. over gently rolling land through shadscale and sagebrush undergrowth.

- 1.35 Wash, 15 lks. wide, 2 ft. deep, drains N. 40° W.
 25.25 Improved dirt road to Delta, bears N. 22° E. and S. 22° W.
 29.50 Wash, 15 lks. wide, 2 ft. deep, drains South.
 36.25 Wash, 30 lks. wide, 4 ft. deep, drains South.
 40.02 Point for the 1/4 sec. cor. of secs. 26 and 35.
 Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T12S R7W

$$\frac{1}{4} \frac{S26}{S35}$$

1967

Raise a mound of stone, 2½ ft. base, 1½ ft. high, N. of cor.

Asc. 30 ft. over gently rolling land.

- 48.00 Wash, 15 lks. wide, 2 ft. deep, drains S. 15° W.
 60.95 Wash, 10 lks. wide, 3 ft. deep, drains South.
 76.25 Wash, 10 lks. wide, 1 ft. deep, drains South.
 80.04 The cor. of secs. 26, 27, 34 and 35.

Land, gently rolling.
 Soil, sandy.
 No timber.
 Undergrowth, shadscale and sagebrush.

N. 89° 58' W., bet. secs. 27 and 34.

Asc. 25 ft. over gently rolling land through sagebrush and shadscale undergrowth.

- 4.00 Wash, 15 lks. wide, 3 ft. deep, drains South.
 7.00 Wash, 10 lks. wide, 2 ft. deep, drains South.
 15.50 Wash, 10 lks. wide, 1 ft. deep, drains S. 10° W.
 21.30 Wash, 20 lks. wide, 3 ft. deep, drains S. 15° E.
 27.25 Wash, 10 lks. wide, 2 ft. deep, drains S. 10° W.
 34.65 Wash, 15 lks. wide, 3 ft. deep, drains S. 20° E.
 39.50 Wash, 20 lks. wide, 5 ft. deep, drains S. 35° W.
 40.00 Point for the 1/4 sec. cor. of secs. 27 and 34.

Survey of the Subdivision,
Township 12 South, Range 7 West

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T12S R7W

$\frac{1}{4}$ $\frac{S27}{S34}$

1967

Raise a mound of stone, $2\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

43.50 Wash, 30 lks. wide, 6 ft. deep, drains S. 45° E.

54.50 Base of small spur, bears N. and S.; asc. 130 ft. over E. slope.

62.45 Spur, slopes S.; desc. 200 ft. over W. slope.

80.00 The cor. of secs. 27, 28, 33 and 34, monumented with an iron post, $2\frac{1}{2}$ ins. diam., set, mkd. and witnessed as described in the official record of the 1960 survey.

Land, gently rolling E. portion; rolling W. portion.
Soil, sandy.

No timber.

Undergrowth, shadscale and sagebrush.

From the cor. of secs. 26, 27, 34 and 35.

N. $0^\circ 07'$ E., bet. secs. 26 and 27.

Asc. 110 ft. over gently rolling land through shadscale and sagebrush undergrowth.

33.50 Trail road, bears N. 65° E. and S. 65° W.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 26 and 27.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, $3\frac{1}{2}$ ft. base to top, with brass cap mkd.

T12S R7W

$\frac{1}{4}$ S27|S26

1967

By triangulation; asc. about 430 ft. over broken and ledgy S. slope.

51.85 Broken ledgy spur, slopes S. 50° E., end one triangulation and beginning of another. Asc. 190 ft. along broken and ledgy E. slope.

68.00 Head of ledgy draw, 30 ft. deep, drains E.

72.60 Ledgy point, slopes sharply E. End triangulation. Desc. 155 ft. over NE. slope.

Survey of the Subdivision,
Township 12 South, Range 7 West

CHAINS

- 77.85 Draw, drains E.; asc. 30 ft. over SE. slope.
- 79.95 Point selected for the witness cor. of secs. 22, 23, 26 and 27.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., on solid rock, and in a mound of stone, $3\frac{1}{2}$ ft. base to top, with brass cap mkd.

T12S R7W
W C
S22 | S23
S27 | S26

1967

- 80.00 Point for the cor. of secs. 22, 23, 26 and 27 falls on sloping ledge and cannot be perpetuated. Cut a cross (X) at exact cor. point.

Land, gently rolling S. portion; ledgy and broken N. portion.

Soil, sandy S. portion; rocky N. portion.

Timber, widely scattered scrub juniper N. portion.

Undergrowth, shadscale and sagebrush.

From the cor. of secs. 23, 24, 25 and 26.

N. $89^{\circ} 59'$ W., bet. secs. 23 and 26.

Over nearly level land through shadscale and sagebrush undergrowth.

- 4.60 Wash, 40 lks. wide, 4 ft. deep, drains S. 15° W.
- 24.10 Wash, 10 lks. wide, 1 ft. deep, drains S. 15° W.
- 34.80 Wash, 15 lks. wide, 2 ft. deep, drains S. 10° W.
- 39.15 Trail road, bears nearly N. and S. 5° E.
- 39.70 Trail road, bears N. 40° E. and S. 35° W.
- 40.00 Point for the $1/4$ sec. cor. of secs. 23 and 26.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground, with brass cap mkd.

T12S R7W

$\frac{1}{4}$ — S23
S26

1967

Raise a mound of stone, $2\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

By triangulation; asc. about 200 ft. over broken and ledgy E. slope.

- 50.00 Spur, slopes S.; desc. about 50 ft. along broken S. slope.
- 65.00 Slope changes; desc. about 50 ft. over W. slope.

Survey of the Subdivision,
Township 12 South, Range 7 West

CHAINS

68.00 Draw, drains S. from S. 80° W.; asc. about 50 ft. over SE. slope.

80.00 True point for the cor. of secs. 22, 23, 26 and 27.

Land, nearly level E. portion; mountainous W. portion.
Soil, sandy E. portion; rocky W. portion.
Timber, widely scattered scrub juniper.
Undergrowth, shadscale and sagebrush.

N. 89° 59' W., bet. secs. 22 and 27.

Over mountainous land through widely scattered timber.
Asc. 300 ft. over E. slope.

4.55 Ledgy ridge, bears nearly N. and S.; desc. 450 ft. over broken NW. slope.

17.20 Draw, drains N. 45° W.; desc. 90 ft. along N. slope.

27.25 Draw, drains N.; asc. 80 ft. over NE. slope.

39.99 Point selected for the witness 1/4 sec. cor. of secs. 22 and 27.

Set an iron post, 30 ins. long, 2½ ins. diam., on solid stone shelf, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T12S R7W

W ¼ ← S22
C S27
1967

40.09 Point for the 1/4 sec. cor. of secs. 22 and 27 falls on sloping sandstone boulder, 30x20x20 ft. above ground, and cannot be perpetuated.

40.15 Top of boulder on spur, slopes West from S. 70° E.; desc. 15 ft. along spur.

45.05 Spur, slopes S. 80° W.; desc. 275 ft. over NW. slope.

55.55 Draw, drains S. 30° W., with trail road in bottom; asc. 240 ft. over SE. slope.

80.18 The cor. of secs. 21, 22, 27 and 28, monumented with an iron post, 2½ ins. diam., set, mkd. and witnessed as described in the official record of the 1960 survey.

Land, mountainous.
Soil, rocky.
Timber, widely scattered scrub juniper.
Undergrowth, shadscale and sagebrush.

From the true point for the cor. of secs. 22, 23, 26 and 27.

Survey of the Subdivision,
Township 12 South, Range 7 West

CHAINS

N. 0° 07' E., bet. secs. 22 and 23..

Over mountainous land through widely scattered timber.
Asc. 100 ft. over SE. slope.

- 6.00 Spur, slopes N. 65° E.; desc. 180 ft. over NW. slope.
8.60 Draw, drains N. 30° E.; asc. 30 ft. over SE. slope.
12.90 Spur, slopes N. 80° E.; desc. 65 ft. over N. slope.
15.20 Draw, drains N. 50° E.; asc. 20 ft. over SE. slope.
19.20 Spur, slopes E.; desc. 225 ft. over NE. slope.
30.90 Draw, drains N. 50° E.; desc. 55 ft. over gently rolling
land.
40.00 Point for the 1/4 sec. cor. of secs. 22 and 23.
Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T12S R7W

½
S22|S23

1967

Raise a mound of stone, 2½ ft. base, 1½ ft. high,
W. of cor.

Desc. 65 ft. over gently rolling land. Leave scattered
timber.

- 50.05 Trail road, bears N. 45° W. and S. 45° E.
57.75 Wash, 10 lks. wide, 1 ft. deep, drains N. 40° W.
59.50 Trail road, bears E. and W.
62.00 Wash, 20 lks. wide, 3 ft. deep, drains irregularly W.;
asc. 50 ft. over rolling land.
75.50 Wash, 10 lks. wide, 2 ft. deep, drains S. 80° W.
77.80 Wash, 1 lk. wide, 1 ft. deep, drains S. 45° W.
80.00 Point for the cor. of secs. 14, 15, 22 and 23.
Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T12S R7W

S15|S14
S22|S23

1967

Raise a mound of stone, 2½ ft. base, 1½ ft. high,
W. of cor.

Land, gently rolling desert.

Soil, sandy.

No timber.

Undergrowth, shadscale, sagebrush and grass.

Survey of the Subdivision,
Township 12 South, Range 7 West

CHAINS

From the cor. of secs. 13, 14, 23 and 24.

S. 89° 58' W., bet. secs. 14 and 23.

Over nearly level land through shadscale and sagebrush undergrowth.

Desc. 45 ft. over gently rolling land.

5.80 Unimproved dirt road, bears S. 50° W. and N. 50° E.

27.95 Jeep road, bears N. and S.

32.85 Point of spur, projects S.

37.00 Wash, 5 lks. wide, 1 ft. deep, drains S.

39.98 Point for the 1/4 sec. cor. of secs. 14 and 23.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T12S R7W

¼ $\frac{S14}{S23}$

1967

Raise a mound of stone, 2½ ft. base, 1½ ft. high, N. of cor.

Asc. 20 ft. over gently rolling land.

46.05 Spur, slopes S. 20° W., 8.00 chs.; desc. 50 ft. over NW. slope.

64.95 Wash, 8 lks. wide, 3 ft. deep, drains S. 40° W.
Continue descent.

76.40 Wash, 5 lks. wide, 3 ft. deep, drains S. 45° W.; asc. 5 ft. over SE. slope.

79.96 The cor. of secs. 14, 15, 22 and 23.

Land, gently rolling desert.

Soil, sandy.

No timber.

Undergrowth, shadscale, sagebrush and grass.

N. 89° 54' W., bet. secs. 15 and 22.

Over rolling desert land through shadscale and sagebrush undergrowth.

Asc. 10 ft. over SE. slope.

1.65 Spur, projects S. 45° W., 10.00 chs.; desc. 40 ft. over NW. slope.

Survey of the Subdivision,
Township 12 South, Range 7 West

CHAINS	
6.15	Wash, 8 lks. wide, 3 ft. deep, drains S. Continue descent.
13.00	Base of rocky ridge, bears S. 45° W. and N. 45° E.; asc. 80 ft. over rocky SE. slope.
17.10	Rocky ridge, projects S. 1.00 ch. A hole in a large rock, bears N. 5.00 chs. dist.; desc. 100 ft. over W. slope.
25.00	Base of rocky ridge, bears N. and S., desc. 50 ft. over rolling desert land.
36.20	Jeep road, bears N. 45° W. and S. 45° E.
40.04	Point for the 1/4 sec. cor. of secs. 15 and 22.
	Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to bedrock, and in a mound of stone, 3½ ft. base to top, with brass cap mkd.
	T12S R7W
	¼ $\frac{S15}{S22}$
	1967
	Desc. 15 ft. over NW. slope.
49.80	Wash, 5 lks. wide, 1 ft. deep, drains S. 50 lks., thence S. 45° W., asc. 45 ft. over SE. slope.
54.30	Spur, projects S. 1.00 ch. Continue ascent.
65.20	Spur, projects S. 20° W., 8.00 chs., desc. 115 ft. over NW. slope.
80.08	The cor. of secs. 15, 16, 21 and 22, monumented with an iron post, 2½ ins. diam., set, mkd. and witnessed as described in the official record of the 1960 survey.
	Land, gently rolling desert. Soil, sandy. No timber. Undergrowth, shadscale, sagebrush and grass.
	From the cor. of secs. 14, 15, 22 and 23.
	N. 0° 07' E., bet. secs. 14 and 15.
	Over mountainous land through shadscale and sagebrush undergrowth; asc. 140 ft. over S. slope.
13.10	Wash, 20 lks. wide, 3 ft. deep, drains S. 20° W. Continue ascent.
28.00	Base of ridge, bears N. and S., asc. 80 ft. over S. slope.
40.00	Point for the 1/4 sec. cor. of secs. 14 and 15.

Survey of the Subdivision,
Township 12 South, Range 7 West

CHAINS

Set an iron post; 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T12S R7W

 $\frac{1}{2}$

S15|S14

1967

Raise a mound of stone, $2\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

Asc. 85 ft. over S. slope.

- 45.93 Ridge, bears E. and W.; desc. 80 ft. over N. slope.
- 50.85 Hollow, drains W.; asc. 110 ft. over NW. slope.
- 55.70 Spur, projects N. 75° W.; desc. 370 ft. over NE. slope.
- 71.25 Hollow, 30 ft. deep, drains N. 45° E. Continue descent.
- 76.30 Hollow, 30 ft. deep, drains N. 45° E. Continue descent.
- 77.50 Wash, 18 lks. wide, 2 ft. deep, drains N. 40° E.; asc. 5 ft. over SE. slope.
- 80.00 Point for the cor. of secs. 10, 11, 14 and 15.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T12S R7W

S10|S11

S15|S14

1967

Land, mountainous.
Soil, rocky.
No timber.
Undergrowth, shadscale and sagebrush.

From the true point for the cor. of secs. 11, 12, 13 and 14.

S. $89^\circ 59'$ W., bet. secs. 11 and 14.

Over mountainous land through widely scattered juniper timber and sagebrush and shadscale undergrowth.

By triangulation; asc. about 400 ft. over broken and ledgy E. slope.

- 6.00 Rocky ridge, bears N. and S. End triangulation; desc. 500 ft. over broken and ledgy W. slope.
- 20.00 Hollow, drains N. 45° W. Leave timber; asc. 400 ft. over NE. slope.

Survey of the Subdivision,
Township 12 South, Range 7 West

CHAINS

- 39.30 Rocky spur, slopes N. 50° W.; desc. 20 ft. over SW. slope.
- 39.98 Point for the 1/4 sec. cor. of secs. 11 and 14.
Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to bedrock and in a mound of stone 3½ ft. base to top, with brass cap mkd.
- T12S R7W
½ — S11
S14
1967
- Desc. 200 ft. over SW. slope.
- 60.00 Wash, 8 lks. wide, 2 ft. deep, drains N. 45° W. Continue descent.
- 72.00 Wash, 15 lks. wide, 5 ft. deep, drains N.; asc. 25 ft. over E. slope.
- 79.96 The cor. of secs. 10, 11, 14 and 15.
Land, mountainous.
Soil, rocky.
Timber, widely scattered juniper.
Undergrowth, shadscale, sagebrush and grass.
- N. 89° 51' W., bet. secs. 10 and 15.
Over mountainous land through shadscale and sagebrush undergrowth.
Asc. 180 ft. over SE. slope.
- 7.90 Spur, projects N. 45° E.; desc. 200 ft. over SW. slope.
- 17.30 Point of spur, projecting N. 45° W. Continue descent.
- 22.30 Draw, 50 ft. deep, drains N.; asc. 140 ft. over NE. slope.
- 26.90 Spur, projects N. 45° W.; desc. 260 ft. over SW. slope.
- 30.90 Hollow, 20 ft. deep, drains N. 45° W.; asc. 30 ft. over NE. slope.
- 40.07 Point for the 1/4 sec. cor. of secs. 10 and 15.
Set an iron post 30 ins. long, 2½ ins. diam., 15 ins. in the ground to bedrock, and in a mound of stone 3½ ft. base to top, with brass cap mkd.
- T12S R7W
½ — S10
S15
1967
- Desc. 160 ft. over W. slope.

Survey of the Subdivision,
Township 12 South, Range 7 West

CHAINS	
45.00	Bottom of steep descent, bears N. and S.; desc. 60 ft. over gently rolling desert land.
54.90	Jeep road, bears N. and S.
59.40	Jeep road, bears N. 45° W. and S. 45° E.
61.00	Wash, 5 lks. wide, 2 ft. deep, drains N. 40° W.
65.90	Wash, 9 lks. wide, 4 ft. deep, drains N. 20° W.
74.90	Wash, 20 lks. wide, 3 ft. deep, drains N. 30° W.
80.14	The cor. of secs. 9, 10, 15 and 16, monumented with an iron post, 2½ ins. diam., set, mkd. and witnessed as described in the official record of the 1960 survey. Land, mountainous E. portion; gently rolling W. portion. Soil, rocky E. portion; sandy W. portion. No timber. Undergrowth, shadscale and sagebrush.
	From the cor. of secs. 10, 11, 14 and 15. N. 0° 02' E., bet. secs. 10 and 11. Over gently rolling desert land through shadscale and sagebrush undergrowth. Asc. 5 ft. over SE. slope.
1.90	Point of spur, projecting E.; desc. 140 ft. through bottom of canyon.
23.90	Wash, 18 lks. wide, 5 ft. deep, drains N.
27.70	Wash, 12 lks. wide, 2 ft. deep, drains N. 80° W.
39.50	Wash, 12 lks. wide, 4 ft. deep, drains N. 80° W.
40.09	Point for the 1/4 sec. cor. of secs. 10 and 11. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">T12S R7W $\frac{1}{4}$ S10 S11 1967</p>
	Raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor.
	Asc. 30 ft. over gently rolling desert land, through shadscale and sagebrush undergrowth.
42.50	Low spur, projects W. 8.00 chs.; desc. 210 ft. over gently rolling desert land.
57.00	Jeep road, bears N. 45° E. and S. 45° W.

Survey of the Subdivision,
Township 12 South, Range 7 West

CHAINS

- 66.20 Jeep road, bears E. and W.
72.70 Wash, 6 lks. wide, 3 ft. deep, drains E.
80.18 The cor. of secs. 2, 3, 10 and 11, monumented with an iron post, 2½ ins. diam., set, mkd. and witnessed as described in the official record of the 1960 survey.

Land, gently rolling desert.
Soil, sandy.
No timber.
Undergrowth, shadscale, sagebrush and grass.

N. 89° 57' W., bet. secs. 3 and 10.

Over nearly level desert land through shadscale and sagebrush undergrowth.

- 26.60 Trail road, bears N. 45° E. and S. 45° W.
28.50 Wash, 8 lks. wide, 3 ft. deep, drains N.
32.60 Trail road, bears N. 20° E. and S. 20° W.
37.40 Wash, 46 lks. wide, 6 ft. deep, drains N.
39.95 Point for the 1/4 sec. cor. of secs. 3 and 10.
Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T12S R7W

¼ $\frac{S3}{S10}$
1967

Raise a mound of stone, 2½ ft. base, 1½ ft. high, N. of cor.

Desc. 90 ft. over gently rolling desert land.

- 64.30 Wash, 15 lks. wide, 3 ft. deep, drains N. 50° W.
79.90 The cor. of secs. 3, 4, 9 and 10, monumented with an iron post, 2½ ins. diam., set, mkd. and witnessed as described in the official record of the 1960 survey.

Land, gently rolling.
Soil, sandy.
No timber.
Undergrowth, shadscale and sagebrush.

From the cor. of secs. 27, 28, 33 and 34.

N. 89° 57' W., bet. secs. 28 and 33.

Descend 160 ft. over gently rolling desert land through shadscale and sagebrush undergrowth.

- 6.80 Wash, 5 lks. wide, 1 ft. deep, drains N.

Survey of the Subdivision,
Township 12 South, Range 7 West

CHAINS

40.00

Point for the 1/4 sec. cor. of secs. 28 and 33.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T12S R7W

$$\frac{1}{4} \begin{array}{l} \text{S28} \\ \text{S33} \end{array}$$

1967

Raise a mound of stone, 2½ ft. base, 1½ ft. high, N. of cor.

Desc. 70 ft. over gently rolling desert land.

80.00

The cor. of secs. 28, 29, 32 and 33, monumented with an iron post, 2½ ins. diam., set, mkd. and witnessed as described in the official record of the 1960 survey.

Land, rolling desert.

Soil, sandy.

No timber.

Undergrowth, shadscale, sagebrush and grass.

N. 0° 05' E., bet. secs. 28 and 29.

Asc. 20 ft. over gently rolling desert land through shadscale and sagebrush undergrowth.

29.10

Trail road, bears N. 45° W. and S. 45° E.

40.00

Point for the 1/4 sec. cor. of secs. 28 and 29.

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground to bedrock, and in a mound of stone, 3½ ft. base to top, with brass cap mkd.

T12S R7W

$$\frac{1}{4} \begin{array}{l} \text{S29} | \text{S28} \end{array}$$

1967

Asc. 85 ft. over gentle S. slope.

71.30

Trail road, bears N. 60° W. and S. 60° E.

75.80

Rocky spur, projects W.; desc. 20 ft. over N. slope.

77.20

Same trail road, bears N. 70° E. and S. 70° W.

80.00

Point for the cor. of secs. 20, 21, 28 and 29.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T12S R7W

$$\begin{array}{l} \text{S20} | \text{S21} \\ \text{S29} | \text{S28} \end{array}$$

1967

Raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor.

Survey of the Subdivision,
Township 12 South, Range 7 West

CHAINS

Land, gently rolling desert.
Soil, sandy.
No timber.
Undergrowth, shadscale, sagebrush and grass.

From the cor. of secs. 21, 22, 27 and 28.

N. 89° 59' W., bet. secs. 21 and 28.

Over mountainous land, through shadscale and sagebrush undergrowth; asc. 190 ft. over broken and ledgy E. slope.

9.50 Ridge, bears N. and S.; desc. 85 ft. over W. slope.

14.80 Hollow, 100 ft. deep, drains S.; asc. 70 ft. over broken and ledgy E. slope.

22.80 Ridge, bears N. and S.; desc. 75 ft. over broken and ledgy NW. slope.

25.00 Hollow, 50 ft. deep, drains S. 40° W.; asc. about 70 ft. over SE. slope.

27.70 Top of ledges, on ridge, bears N. 40° E. and S. 40° W. By triangulation; desc. about 200 ft. over broken and ledgy NW. slope.

40.03 Point for the 1/4 sec. cor. of secs. 21 and 28.

Set an iron post, 30 ins. long, 2½ ins. diam., on solid rock, and in a mound of stone, 3½ ft. base to top, with brass cap mkd.

T12S R7W

¼ $\frac{S21}{S28}$

1967

By triangulation; desc. about 200 ft. over broken and ledgy NW. slope.

55.00 Base of hill, bears S. 65° W. and N. 65° E.; desc. about 100 ft. over gently rolling desert land.

79.50 Trail road, bears NW. and S.

80.06 The cor. of secs. 20, 21, 28 and 29.

Land, mountainous on 60.00 chs., gently rolling on 20.00 chs.

Soil, rocky on 60.00 chs., sandy on 20.00 chs.

No timber.

Undergrowth, shadscale, sagebrush and grass.

N. 0° 05' E., bet. secs. 20 and 21.

Over rolling desert land through shadscale and sagebrush undergrowth; asc. 20 ft. over gentle S. slope.

0.50 Trail road, bears N. 30° W. and S. 30° E.

9.80 Small rocky spur, projects W.; desc. 20 ft. over N. slope.

Survey of the Subdivision,
Township 12 South, Range 7 West

CHAINS

- 17.80 Base of spur, bears E. and W.; asc. 10 ft. over gently rolling desert land.
- 40.02 Point for the 1/4 sec. cor. of secs. 20 and 21.
Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
T12S R7W
½
S20|S21
1967
Raise a mound of stone, 3 ft. base, 1½ ft. high, W. of cor.
Asc. 55 ft. over gently rolling desert land.
- 46.60 Trail road, bears E. and W.
- 52.40 Wash, 50 lks. wide, 4 ft. deep, drains W.
- 80.04 The cor. of secs. 16, 17, 20 and 21, monumented with an iron post, 2½ ins. diam., set, mkd. and witnessed as described in the official record of the 1960 survey.
Land, gently rolling.
Soil, sandy.
No timber.
Undergrowth, shadscale, sagebrush and grass.
- From the cor. of secs. 8, 9, 16 and 17, monumented with an iron post, 2½ ins. diam., set, mkd. and witnessed as described in the official record of the 1960 survey.
N. 0° 05' E., bet. secs. 8 and 9.
Descend 45 ft. over gently rolling desert land through shadscale and sagebrush undergrowth.
- 9.30 Trail road, bears N. 70° W. and S. 70° E.
- 23.60 Wash, 5 lks. wide, 1 ft. deep, drains N. 70° W.
- 28.80 Trail road, bears N. 45° W. and S. 45° E.
- 40.00 Point for the 1/4 sec. cor. of secs. 8 and 9.
Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
T12S R7W
½
S8|S9
1967
Raise a mound of stone, 3 ft. base, 1½ ft. high, W. of cor.
Thence over nearly level land.

Survey of the Subdivision,
Township 12 South, Range 7 West

CHAINS

- 46.00 Graded gravel road to Jericho, bears N. 55° E. and S. 55° W.
 - 53.30 Wash, 5 lks. wide, 1 ft. deep, drains N. 50° W.
 - 58.20 Wash, 5 lks. wide, 1 ft. deep, drains N. 80° W.
 - 73.40 Wash, 3 lks. wide, 4 ft. deep, drains W.
 - 77.80 Wash, 5 lks. wide, 7 ft. deep, drains W.
 - 80.00 Point for the cor. of secs. 4, 5, 8 and 9.
- Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T12S R7W

S5	S4
S8	S9

1967

Raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor.

Land, gently rolling.
Soil, sandy.
No timber.
Undergrowth, shadscale, sagebrush and grass.

- From the cor. of secs. 3, 4, 9 and 10.
 - S. 89° 59' W., bet. secs. 4 and 9.
 - Over nearly level desert land through shadscale and sagebrush undergrowth.
 - 18.80 Graded gravel road to Jericho, bears N. 45° E. and S. 45° W.
 - 40.00 Point for the 1/4 sec. cor. of secs. 4 and 9.
- Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T12S R7W

½	S4
	S9

1967

Raise a mound of stone, 2½ ft. base, 1½ ft. high, N. of cor.

- Continue over nearly level land.
 - 80.00 The cor. of secs. 4, 5, 8 and 9.
- Land, nearly level desert.
Soil, sandy.
No timber.
Undergrowth, shadscale, sagebrush and grass.

Survey of the Subdivision,
Township 12 South, Range 7 West

CHAINS

N. 0° 04' W., bet. secs. 4 and 5.

Over nearly level desert land through shadscale and sagebrush undergrowth.

17.40 Wash, 12 lks. wide, 4 ft. deep, drains W.

26.70 Wash, 23 lks. wide, 6 ft. deep, drains irregularly W.

30.50 Wash, 15 lks. wide, 3 ft. deep, drains S. 45° W.

40.00 Point for the 1/4 sec. cor. of secs. 4 and 5.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T12S R7W

½
S5 | S4

1967

Raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor.

Continues over nearly level desert land.

80.00 Point for the 80 1/16 sec. cor. of secs. 4 and 5.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T12S R7W

1
16
S5 | S4

80

1967

Raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor.

91.50 Wash, 5 lks. wide, 1 ft. deep, drains S. 45° W.

93.75 The cor. of secs. 4, 5, 32 and 33, on the N. bdy. of the Tp., monumented with an iron post, 3 ins. diam., set, mkd. and witnessed as described in the official record of the 1915 survey.

Land, nearly level desert.

Soil, sandy.

No timber.

Undergrowth, shadscale, sagebrush and grass.

From the cor. of secs. 29, 30, 31 and 32, monumented with an iron post, 2½ ins. diam., set, mkd. and witnessed as described in the official record of the 1960 survey.

N. 89° 51' W., bet. secs. 30 and 31.

Survey of the Subdivision
Township 12 South, Range 7 West

CHAINS

Descend 60 ft. over gently rolling desert land through
shadscale and sagebrush undergrowth.

6.40 Wash, 3 lks. wide, 1 ft. deep, drains S.

40.00 Point for the 1/4 sec. cor. of secs. 30 and 31.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T12S R7W

½ — S30
S31

1967

Raise a mound of stone, 2½ ft. base, 1½ ft. high,
N. of cor.

Desc. 70 ft. over gently rolling land.

79.61 The cor. of secs. 25 and 36, on the W. bdy. of the Tp.,
monumented with an iron post 2½ ins. diam., set, mkd.
and witnessed as described in the official record of the
1960 survey.

This corner will now function as the cor. of secs. 25,
30, 31 and 36, and was remarked.

T12S

R8W R7W

S25 | S30
S36 | S31

1967

1960

From the cor. of secs. 29, 30, 31 and 32.

N. 0° 05' E., bet. secs. 29 and 30.

Ascend 30 ft. over gently rolling desert land through
shadscale and sagebrush undergrowth.

40.00 Point for the 1/4 sec. cor. of secs. 29 and 30.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T12S R7W

½ — S30
S29

1967

Raise a mound of stone, 2½ ft. base, 1½ ft. high,
W. of cor.

Asc. 30 ft. over gently rolling land.

Survey of the Subdivision,
Township 12 South, Range 7 West

CHAINS	
65.00	Trail road, bears N. 45° W. and S. 45° E.
80.00	<p>Point for the cor. of secs. 19, 20, 29 and 30.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T12S R7W</p> <p style="text-align: center;"> $\begin{array}{c} \frac{S19}{S30} \frac{S20}{S29} \\ \hline \end{array}$ </p> <p style="text-align: center;">1967</p> <p>Raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor.</p> <p>Land, gently rolling desert. Soil, sandy. No timber. Undergrowth, shadscale, sagebrush and grass.</p>
28.50	<p>From the cor. of secs. 20, 21, 28 and 29.</p> <p>West, bet. secs. 20 and 29.</p> <p>Descend 80 ft. over gently rolling desert land through shadscale and sagebrush undergrowth.</p> <p>Wash, 20 lks. wide, 2 ft. deep, drains S. 50° W.</p>
39.99	<p>Point for the 1/4 sec. cor. of secs. 20 and 29.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T12S R7W</p> <p style="text-align: center;"> $\frac{1}{4} \frac{S20}{S29}$ </p> <p style="text-align: center;">1967</p> <p>Raise a mound of stone, 2½ ft. base, 1½ ft. high, N. of cor.</p>
79.98	<p>The cor. of secs. 19, 20, 29 and 30.</p> <p>Land, gently rolling desert. Soil, sandy. No timber. Undergrowth, shadscale, sagebrush and grass.</p>
40.00	<p>N. 89° 46' W., bet. secs. 19 and 30.</p> <p>Over nearly level desert land through shadscale and sagebrush undergrowth.</p> <p>Point for the 1/4 sec. cor. of secs. 19 and 30.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>

330
330

Survey of the Subdivision,
Township 12 South, Range 7 West

CHAINS

T12S R7W

1/4 S19
S30

1967

Raise a mound of stone, 2 1/2 ft. base, 1 1/2 ft. high,
N. of cor.

79.68

The cor. of secs. 24 and 25, on the W. bdy. of the Tp.,
monumented with an iron post, 2 1/2 ins. diam., set, mkd.
and witnessed as described in the official record of the
1960 survey.

This cor. will now function as the cor. of secs. 19, 24,
25 and 30, and was remarked.

T12S
R8W R7W

S24|S19
S25|S30

1967

1960

Land, gently rolling desert.
Soil, sandy.
No timber.
Undergrowth, shadscale, sagebrush and grass.

From the cor. of secs. 19, 20, 29 and 30.

N. 0° 05' E., bet. secs. 19 and 20.

Ascend 30 ft. over gently rolling desert land through
shadscale and sagebrush undergrowth.

1.30

Wash, 3 lks. wide, 1 ft. deep, drains E.

40.00

Point for the 1/4 sec. cor. of secs. 19 and 20.

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins.
in the ground, with brass cap mkd.

T12S R7W

1/4 S19|S20

1967

Raise a mound of stone 2 1/2 ft. base, 1 1/2 ft. high,
W. of cor.

Asc. 85 ft. over gently rolling land.

55.20

Trail road, bears E. and W.

55.80

Wash, 4 lks. wide, 1 ft. deep, drains W.

80.00

Point for the cor. of secs. 17, 18, 19 and 20.

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins.
in the ground, with brass cap mkd.

Survey of the Subdivision,
Township 12 South, Range 7 West

CHAINS

T12S R7W

S18	S17
S19	S20

1967

Raise a mound of stone, $2\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high,
W. of cor.

Land, gently rolling desert.
Soil, sandy.
No timber.
Undergrowth, shadscale, sagebrush and grass.

From the cor. of secs. 16, 17, 20 and 21.

West, bet. secs. 17 and 20.

Over gently rolling desert land through shadscale and
sagebrush undergrowth; desc. 40 ft. over gentle W.
slope.

19.70 Trail road, bears N. 50° E. and S. 50° W.

27.60 Trail road, bears N. 30° W. and S. 30° E.

33.00 Base of knoll, bears N. and S.; asc. 5 ft. over E.
slope.

39.00 Small rocky knoll; desc. 5 ft. over W. slope.

39.98 Point for the $\frac{1}{4}$ sec. cor. of secs. 17 and 20.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., on solid
rock, and in a mound of stone, $3\frac{1}{2}$ ft. base to top, with
brass cap mkd.

T12S R7W

$\frac{1}{2}$	S17
	S20

1967

Desc. 50 ft. over gentle W. slope.

79.96 The cor. of secs. 17, 18, 19 and 20.

Land, rolling desert.
Soil, sandy.
No timber.
Undergrowth, shadscale, sagebrush and grass.

N. $89^\circ 48'$ W., bet. secs. 18 and 19.

Descend 70 ft. over gently rolling desert land through
shadscale and sagebrush undergrowth.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 18 and 19.

Survey of the Subdivision,
Township 12 South, Range 7 West

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd

T12S R7W

¼ S18
S19

1967

Raise a mound of stone, 2½ ft base, 1½ ft high, N of cor

Thence, over nearly level land

79 75 The cor of secs 13 and 24, on the W bdy of the Tp., monumented with an iron post, 2½ ins diam, set, mkd and witnessed as described in the official record of the 1960 survey

This sec cor will now function as the cor of secs 13, 18, 19 and 24, and was remarked

T12S
R8W R7W
S13 | S18
S24 | S19

1967

1960

Land, gently rolling desert
Soil, sandy
No timber
Undergrowth, shadscale, sagebrush and grass

From the cor of secs 17, 18, 19 and 20

N 0° 05' E, bet secs 17 and 18

Ascend 40 ft over gently rolling desert land through shadscale and sagebrush undergrowth

9 30 Trail road, bears E and W.

40 00 Point for the 1/4 sec cor of secs 17 and 18

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins in the ground, with brass cap mkd

T12S R7W

¼ S18 | S17

1967

Raise a mound of stone, 2½ ft base, 1½ ft. high, W. of cor.

Asc 40 ft over gently rolling desert land.

77 90 Graded gravel road to Jericho, bears N. 56° 15' E., and S 56° 15' W.

Survey of the Subdivision,
Township 12 South, Range 7 West

CHAINS

- 80.00 Point for the cor. of secs. 7, 8, 17 and 18.
Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.
- T12S R7W
 $\frac{S7}{S18} | \frac{S8}{S17}$
1967
- Raise a mound of stone, $2\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, W. of cor.
-
- From the cor. of secs. 8, 9, 16 and 17.
S. $89^{\circ} 54'$ W., bet. secs. 8 and 17.
Descend 40 ft. over gently rolling desert land through shadscale and sagebrush undergrowth.
- 6.50 Wash, 3 lks. wide, 1 ft. deep, drains N. 45° W.
12.80 Wash, 3 lks. wide, 1 ft. deep, drains N. 45° W.
26.60 Wash, 2 lks. wide, 1 ft. deep, drains N. 50° W.
28.50 Wash, 2 lks. wide, 1 ft. deep, drains N. 50° W.
34.60 Wash, 3 lks. wide, 1 ft. deep, drains N. 45° W.
35.40 Wash, 3 lks. wide, 1 ft. deep, drains N. 45° W.
36.20 Wash, 2 lks. wide, 1 ft. deep, drains N. 45° W.
36.90 Wash, 2 lks. wide, 1 ft. deep, drains N. 45° W.
39.99 Point for the $\frac{1}{4}$ sec. cor. of secs. 8 and 17.
Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.
- T12S R7W
 $\frac{1}{4} \frac{S8}{S17}$
1967
- Raise a mound of stone, $2\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, N. of cor.
- 76.80 Graded gravel road to Jericho, bears N. $56^{\circ} 15'$ E., and S. $56^{\circ} 15'$ W.
79.70 Trail road, bears N. 40° W. and S. 40° E.
79.98 The cor. of secs. 7, 8, 17 and 18.

Survey of the Subdivision,
Township 12 South, Range 7 West

CHAINS

Land, gently rolling desert.
Soil, sandy.
No timber.
Undergrowth, shadscale, sagebrush and grass.

N. 89° 40' W., bet. secs. 7 and 18.

Over gently rolling desert land through shadscale and sagebrush undergrowth; asc. 10 ft. over gentle E. slope.

16.00 Top of ascent, bears N. and S.; desc. 10 ft. over W. slope.

23.80 Wash, 5 lks. wide, 2 ft. deep, drains N.; asc. 60 ft. over E. slope.

34.00 Wash, 15 lks. wide, 4 ft. deep, drains S. 45° W. Continue ascent.

40.00 Point for the 1/4 sec. cor. of secs. 7 and 18.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T12S R7W

½	S7
	S18
	1967

Raise a mound of stone, 2½ ft. base, 1½ ft. high, N. of cor.

56.00 Top of ascent from wash, bears N. and S. Thence over nearly level desert land.

79.95 The cor. of secs. 12 and 13, on the W. bdy. of the Tp., monumented with an iron post, 2½ ins. diam., set, mkd. and witnessed as described in the official record of the 1960 survey.

This cor. will now function as the cor. of secs. 7, 12, 13 and 18, and was remarked.

T12S
R8W R7W

S12	S7
S13	S18

1967
1960

Land, gently rolling desert.
Soil, sandy.
No timber.
Undergrowth, shadscale, sagebrush and grass.

From the cor. of secs. 7, 8, 17 and 18.

Survey of the Subdivision,
Township 12 South, Range 7 West

CHAINS

N. 0° 05' E., bet. secs. 7 and 8.

Descend 20 ft. over gently rolling desert land through
shadscale and sagebrush undergrowth.

0.30 Trail road, bears N. 60° W. and S. 60° E.

3.20 Wash, 5 lks. wide, 1 ft. deep, drains N. 80° W.

20.00 Trail road, bears E. and W.

40.00 Point for the 1/4 sec. cor. of secs. 7 and 8.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins.
in the ground; with brass cap mkd.

T12S R7W

½
S7|S8

1967

Raise a mound of stone, 2½ ft. base, 1½ ft. high,
W. of cor.

Desc. 10 ft. over gently rolling land.

47.20 Wash, 5 lks. wide, 2 ft. deep, drains S. 40° W.

53.40 Wash, 23 lks. wide, 6 ft. deep, drains S. 30° W.

80.00 Point for the cor. of secs. 5, 6, 7 and 8.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T12S R7W

S6|S5
S7|S8

1967

Raise a mound of stone, 3 ft. base, 1½ ft. high,
W. of cor.

Land, gently rolling desert.

Soil, sandy.

No timber.

Undergrowth, shadscale, sagebrush and grass.

From the cor. of secs. 4, 5, 8 and 9.

S. 89° 54' W., bet. secs. 5 and 8.

Over rolling desert land through shadscale and sagebrush
undergrowth.

39.99 Point for the 1/4 sec. cor. of secs. 5 and 8.

Survey of the Subdivision,
Township 12 South, Range 7 West

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins. in the ground to bedrock, and in a mound of stone, $3\frac{1}{2}$ ft. base to top, with brass cap mkd.

T12S R7W

$$\frac{1}{4} \frac{S5}{S8}$$

1967

Thence over nearly level land.

44.60 Wash, 30 lks. wide, 10 ft. deep, drains S. 40° W.

79.98 The cor. of secs. 5, 6, 7 and 8.

Land, gently rolling desert.

Soil, sandy.

No timber.

Undergrowth, shadscale, sagebrush and grass.

West, bet. secs. 6 and 7.

Over nearly level desert land through shadscale and sagebrush undergrowth.

4.10 Trail road, bears N. 5° E. and S. 5° W.

40.00 Point for the $1/4$ sec. cor. of secs. 6 and 7.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T12S R7W

$$\frac{1}{4} \frac{S6}{S7}$$

1967

Raise a mound of stone, $2\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

Continue over nearly level land.

79.97 Intersect the W. bdy. of the Tp.

Point for the closing cor. of secs. 6 and 7.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T12S

R8W R7W

$$S12 \left| \frac{S6}{S7} \right. \begin{matrix} C \\ C \end{matrix}$$

1967

Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, E. of cor.

Survey of the Subdivision,
Township 12 South, Range 7 West

CHAINS

From which, the cor. of secs. 1 and 12, T. 12 S., R. 8 W. bears N. $0^{\circ} 05' E.$, 0.96 lks. dist., monumented with an iron post, $2\frac{1}{2}$ ins. diam., set, mkd. and witnessed as described in the official records of the 1960 survey.

Land, gently rolling desert.

Soil, sandy.

No timber.

Undergrowth, shadscale, sagebrush and grass.

Point for the W. $1/4$ sec. cor. of sec. 7, on the W. bdy. of the Tp., and midpoint bet. the cor. of secs. 7, 12, 13 and 18 and the closing cor. of secs. 6 and 7.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T12S
R8W R7W
|
 $\frac{1}{4}$
|
S7
|
1967

Raise a mound of stone, $2\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, E. of cor.

From which, the E. $1/4$ sec. cor. of sec. 12, T. 12 S., R. 8 W., bears N. $0^{\circ} 01' E.$, 0.36 lks. dist., monumented with an iron post, $2\frac{1}{2}$ ins. diam., set, mkd. and witnessed as described in the official records of the 1960 survey.

Point for the W. $1/4$ sec. cor. of sec. 6, on the W. bdy. of the Tp., at 40.00 chs., northing from the closing cor. of secs. 6 and 7.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T12S
R8W R7W
|
 $\frac{1}{4}$
|
S6
|
1967

Raise a mound of stone, $2\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, E. of cor.

From which, the E. $1/4$ sec. cor. of sec. 1, T. 12 S., R. 8 W., bears N. $0^{\circ} 03' E.$, 1.31 chs. dist., monumented with an iron post, $2\frac{1}{2}$ ins. diam., set, mkd. and witnessed as described in the official record of the 1960 survey.

Survey of the Subdivision,
Township 12 South, Range 7 West

CHAINS

Point for the 80 1/16 sec. cor. of sec. 6, on the W. bdy. of the Tp., at 80.00 chs.; northing from the closing cor. of secs. 6 and 7.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T12S
R8W R7W
|
1
|
16
|
S6
|
80
1967

Raise a mound of stone, 3 ft. base, 1½ ft. high, E. of cor.

From which, the cor. of T. 11 and 12 S., R. 8 W., bears N. 0° 05' E., 1.41 chs. dist., monumented with an iron post, 3 ins. diam., set, mkd. and witnessed as described in the official record of the 1915 survey.

From the cor. of secs. 5, 6, 7 and 8.

N. 0° 04' W., bet. secs. 5 and 6.

Over gently rolling desert land through shadscale and sagebrush undergrowth.

22.50 Trail road, bears S. 30° W. and N. 30° E.

40.00 Point for the 1/4 sec. cor. of secs. 5 and 6.

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground to bedrock, and in a mound of stone 3½ ft. base to top, with brass cap mkd.

T12S R7W
|
½
S6 | S5
|
1967

Thence over nearly level land.

49.70 Same trail road, bears N. 40° W. and S. 40° E.

80.00 Point for the 80 1/16 sec. cor. of secs. 5 and 6.

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground to bedrock, and in a mound of stone 3½ ft. base to top, with brass cap mkd.

T12S R7W
|
1
|
16
|
S6 | S5
|
80
1967

Survey of the Subdivision,
Township 12 South, Range 7 West

CHAINS

93.82

The cor. of secs. 5, 6, 31 and 32, on the N. bdy. of the Tp., monumented with an iron post, 3 ins. diam., set, mkd. and witnessed as described in the official record of the 1915 survey.

Land, gently rolling desert.

Soil, sandy.

No timber.

Undergrowth, shadscale, sagebrush and grass.

General Description

The Northeast portion of the township is located in the Desert Mountain Range, which rises to an elevation of 6,500 ft. and is very broken and ledgy. Soil in this portion of the township is very rocky. The area is covered with widely scattered scrub juniper. The remainder of the township is gently rolling desert land, about 4,700 ft. in elevation. Soil in this portion is a sandy desert loam and is covered with shadscale, sagebrush and grass. There are numerous trail roads in the township. The area is good land for winter sheep grazing, but there is no water located within the township. The area is drained in a south-westerly direction by numerous washes and draws. U.S.G.S. "Trail" is located in the Northeast portion of sec. 14, on Deseret Mountain.

CHAINS

Blank

Page

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS

NAMES	CAPACITY
Phylip John Leslie	Surveying Technician
Ferrel D. Reynolds	Survey Aid
Gail E. Reynolds	Survey Aid
Jay L. Hyatt	Survey Aid
Henry Worley	Survey Aid
Stephen Whittiker	Survey Aid
Joe Louis Moore	Survey Aid
George A. Anast	Survey Aid
Leonard Cox	Survey Aid
Arthur K. VanBuron	Survey Aid
Louis Wilcox	Survey Aid
Stephen B. Barker	Survey Aid

CERTIFICATE OF SURVEY

I, Glen B. Hatch, HEREBY CERTIFY upon honor that,
 in pursuance of special instructions bearing date of the 3rd day of November, 19 67,
 I have surveyed the completion of the subdivisional lines of Township 12 South
 Range 7 West

of the Salt Lake Meridian, in the State of Utah, which
 are represented in the foregoing field notes as having been executed by me and under my direction;
 and that said survey has been made in strict conformity with said special instructions, the Manual
 of Instructions for the Survey of the Public Lands of the United States, and in specific manner
 described in the foregoing field notes.

12/21/67

(Date)

Glen B Hatch(Cadastral Surveyor)
SUPERVISORY_____
(Date)_____
(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

SUBMITTED FOR APPROVAL

Date MAR 1 8 1968BUREAU OF LAND MANAGEMENT,
Washington, D. C.

The foregoing field notes of the completion survey of the subdivisional lines of
 Township 12 South, Range 7 West

executed by Glen B. Hatch, Supervisory Cadastral Surveyor
 having been critically examined and found correct, are hereby approved.

JUL 1 6 1968

(Date)

R E Brown

(Chief, Division of Engineering)

CERTIFICATE OF TRANSCRIPT

 _____, is a true copy of the original field notes.

Blank

Page

Blank

Page

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

ORIGINAL '65 JUL 15 AM 10:11

FIELD NOTES

DEPT. OF INTERIOR
BUR. OF LAND MGMT.

DEPENDENT RESURVEY

OF THE

SOUTH BOUNDARY

AND

A PORTION OF THE SUBDIVISIONAL LINES

AND THE

SURVEY OF A PORTION OF

THE SUBDIVISIONAL LINES

OF

T. 11 S., R. 8 W.

Of the _____ SALT LAKE _____ Meridian,

In the State of _____ UTAH _____

EXECUTED BY

GLEN B. HATCH

SUPERVISORY CADASTRAL SURVEYOR

Under special instructions dated _____ MAY 18 _____, 19 65 _____, which provided for the surveys
included under Group Number _____ 470 _____, approved _____ MAY 20, 1965 _____,
and assignment instructions dated _____ MAY 21 _____, 19 65 _____.

Survey commenced _____ DECEMBER 13 _____, 19 66 _____

INDEX DIAGRAM

Township 11 SOUTH, Range 8 WEST,

57	54	52	51		
57 6	55 8	53 4	51 8	50 9	1
49	48	36	28		
7	47 8	35 9	27 10	11	18
46	46	35	26		
18	45 17	34 16	25 15	18 14	18
44	43	33	25	17	12
19	42 20	32 21	23 22	16 23	12 24
42	41	31	23	16	11
30	40 20	30 20	21 27	15 26	10 25
39	38	29	21	14	9
31	37 22	28 23	19 24	13 25	8 26
7	6	5	4	3	2

Township 11 South, Range 8 West

CHAINS

The north boundary (Second Standard Parallel South) was surveyed by Joseph Gorkinski in 1876. In 1947 Elliott Bird and J. C. Clark independently resurveyed this boundary, and in 1960, Boyd S. Owens retraced the east 2 miles. The south boundary was surveyed by Joseph Gorkinski in 1876. The south 5 miles of the east boundary were surveyed by Joseph Gorkinski in 1876. In 1915, H. W. Miller and Isaac Hayes resurveyed the south 5 miles of the east boundary and surveyed the north 1 mile. In 1960, Boyd S. Owens resurveyed the north 2 miles of this boundary. The south 5½ miles of the west boundary were surveyed by Joseph Gorkinski in 1876, and were resurveyed in 1936 by K. C. Vincent and D. T. Brown, who surveyed the north one half mile that same year. The subdivision, except sections 1 through 6, was surveyed by Joseph Gorkinski in 1876. In 1960, Boyd S. Owens surveyed sections 1 and 2 and resurveyed sections 11 and 12. The following field notes are those of the dependent resurvey of the south boundary, a portion of the subdivisional lines and the survey of a portion of the subdivision, Township 11 South, Range 8 West, Salt Lake Meridian, Utah.

The survey and resurvey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1947, and Special Instructions dated May 18, 1965.

Before restoring the corners, the lines of the original survey were retraced and a diligent search made for any evidence of the original corners, bearing trees or other calls of the original field note record.

The rules of proportionate measurement were applied to ascertain the position of the lost corners, but not until exhausting every reasonable possibility of finding direct evidence for the control of each particular corner.

The direction of the lines of this survey were determined by hour angle observations on Polaris. The lines were carried forward by sustained angulation being supplemented by other hour angle observations on Polaris taken throughout the progress of the survey.

The length of the lines were determined by chaining.

The geographic position of the southeast corner of the township is at latitude 39° 48' 50.5" N. and longitude 112° 41' 09.3" W., as computed from the 1960 resurvey plat of the southeast corner of section 12.

The magnetic declination was read at several stations in the township and the average of these readings was found to be 16° 30' East.

Dependent Resurvey of the South Boundary,
T. 11 S., R. 8 W.

Dependent Resurvey of the South Boundary, T. 11 S., R. 8 W.

CHAINS

Reestablishment of the Survey Executed
by Joseph Gorkinski in 1876.

Beginning at the cor. of Tps. 11 and 12 S., R. 8 W., which is an iron post, 3 ins. diam., firmly set and properly mkd. as described in the official record of the 1915 survey.

thence

N. 89° 46' W., bet. secs. 1 and 36.

Over gently rolling land through shadscale undergrowth.

- 4.90 Wash, 20 lks. wide, 10 ft. deep, drains S. 20° W., curving SW.
- 17.65 Wash, 10 lks. wide, 2 ft. deep, drains S.
- 40.07 The 1/4 sec. cor. of secs. 1 and 36, monumented with a sandstone, 12x10x8 ins., firmly set and plainly mkd. 1/4 on N. face.

At the cor. point

Set a plastic post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T11S R8W

½ S36
S1

T12S R8W

1967

Bury original stone cor. alongside plastic post.

No accessories available.

N. 89° 33' W., beginning new measurement.

- 11.10 Wash, 10 lks. wide, 3 ft. deep, drains S. 60° W.
- 22.35 Wash, 10 lks. wide, 3 ft. deep, drains S. 40° W.
- 40.10 The cor. of secs. 1, 2, 35 and 36, monumented with a flintstone, 12x10x8 ins., firmly set and plainly mkd. 1 notch on E. and 5 notches on W. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T11S R8W

S35|S36
S2|S1

T12S R8W

1967

Bury original stone cor. alongside iron post.

Dependent Resurvey of the South Boundary, T. 11 S., R. 8 W.

CHAINS

No accessories available.

Land, gently rolling desert.
Soil, clay.
No timber.
Undergrowth, shadscale.

N. 89° 35' W., bet. secs. 2 and 35.

Over gently rolling desert land through shadscale undergrowth.

- 2.40 Wash, 10 lks. wide, 2 ft. deep, drains N. 15° W.
- 16.95 Wash, 15 lks. wide, 4 ft. deep, drains S. 80° W.
- 20.35 Same wash, drains N. 85° W.
- 38.00 Same wash, drains S. 85° W.
- 39.97 The 1/4 sec. cor. of secs. 2 and 35, monumented with a sandstone, 10x8x4 ins., firmly set and plainly mkd. 1/4 on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T11S R8W

¼ S35
S2

T12S R8W

1967

Bury original stone cor. alongside iron post.

No accessories available.

N. 89° 44' W., beginning new measurement.

- 2.00 Wash, 15 lks. wide, 3 ft. deep, drains N. 60° W.
- 28.35 Wash, 15 lks. wide, 5 ft. deep, drains S. 30° W., thence over nearly level land.
- 40.10 The cor. of secs. 2, 3, 34 and 35, monumented with a quartzite stone, 12x10x8 ins., firmly set and plainly mkd. 2 notches on E. and 4 on W. edges.

Dependent Resurvey of the South Boundary, T. 11 S., R. 8 W.

CHAINS

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T11S R8W

S34	S35
S3	S2

T12S R8W

1967

Bury original stone cor. alongside iron post.

No accessories available.

Land, gently rolling desert E. portion; nearly level W. portion.
Soil, clay.
No timber.
Undergrowth, shadscale.

N. $89^{\circ} 59'$ W., bet. secs. 3 and 34.

Over nearly level desert land through shadscale undergrowth.

- 5.10 Wash, 10 lks. wide, 2 ft. deep, drains S. 75° W., curving SW.
- 20.06 Fence, bears N. and S.
- 37.00 Judd Creek, 25 lks. wide, 6 ft. deep, drains S. 75° W. from N. 80° E.
- 39.97 The $\frac{1}{4}$ sec. cor. of secs. 3 and 34, monumented with a sandstone, 12x8x6 ins., firmly set and plainly mkd. $\frac{1}{4}$ on N. face.

At the cor. point

Set a plastic post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T11S R8W

$\frac{1}{2}$	S34
	S3

T12S R8W

1967

Dependent Resurvey of the South Boundary, T. 11 S., R. 8 W.

CHAINS

Bury original stone cor. alongside plastic post.

No accessories available.

N. 89° 42' W., beginning new measurement.

40.17

The cor. of secs. 3, 4, 33 and 34, monumented with a quartzite stone, 12x8x6 ins., firmly set and plainly mkd. 3 notches on E. and W. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T11S R8W

S33	S34
S4	S3

T12S R8W

1967

Bury original stone cor. alongside iron post.

No accessories available.

Land, nearly level desert.

Soil, clay.

No timber.

Undergrowth, shadscale and greasewood.

N. 89° 47' W., bet. secs. 4 and 33.

Over nearly level land through greasewood undergrowth.

20.00

Leave greasewood, bears N. and S., enter cultivated land.

39.87

Point for the 1/4 sec. cor. of secs. 4 and 33 at proportionate dist., falls on private cultivated land and is not monumented. There is no remaining evidence of the original cor.

41.57

Fall 1.75 chs. south of fence cor., with fences bearing nearly N. and W.

50.05

Cement line ditch, 5 lks. wide, 1 ft. deep, drains N.

79.74

Point for the cor. of secs. 4, 5, 32 and 33 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

Dependent Resurvey of the South Boundary, T. 11 S., R. 8 W.

CHAINS

T11S R8W

S32	S33
S5	S4

T12S R8W

1967

Land, nearly level.
 Soil, sandy clay.
 No timber.
 Undergrowth, greasewood E. 20.00 chs. Cultivated W.
 portion.

N. 89° 47' W., bet. secs. 5 and 32.

Over nearly level cultivated land.

- 0.78 Fence, bears nearly S. and N., 1.01 chs. N; thence
 nearly E. Leave cultivated land.
- Asc. 65 ft. over gently sloping land. Enter sagebrush.
- 2.30 Improved dirt road to Bennion Ranch, bears N. and S.
- 22.10 Wash, 30 lks. wide, 4 ft. deep, drains N. 60° E.
- 39.87 The 1/4 sec. cor. of secs. 5 and 32, monumented with
 a sandstone, 13x8x6 ins., firmly set and plainly mkd.
 1/4 on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins.
 in the ground, and in a collar of stone, with brass cap
 mkd.

T11S R8W

¼	S32
	S5

T12S R8W

1967

Bury original stone cor. alongside iron post.

S. 89° 48' W., beginning new measurement.

Asc. 75 ft. over W. slope.

- 23.90 Spur, slopes N., desc. 10 ft. over NW. slope.
- 35.50 Head of small draw, drains N.; asc. 20 ft. over E.
 slope.
- 39.70 The cor. of secs. 5, 6, 31 and 32, monumented with a
 porphyry stone, 20x12x8 ins., firmly set in mound of
 stone, 2 ft. base, and plainly mkd. 1 notch on W. and
 5 on E. edges.

At the cor. point

Dependent Resurvey of the South Boundary, T. 11 S., R. 8 W.

CHAINS

Set a plastic post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T11S R8W

S31 | S32

S6 | S5

T12S R8W

1967

Bury original stone cor. in mound of stone alongside plastic post.

Cor. located on point of small spur, slopes N.

Land, gently rolling.

Soil, sandy.

Timber, widely scattered juniper extreme W. portion.

Undergrowth, sagebrush.

S. 89° 13' W., bet. secs. 6 and 31.

Over rolling land through widely scattered timber and dense sagebrush undergrowth. Desc. 45 ft. over W. slope.

- 5.50 Head of small draw, drains N., asc. along N. slope.
- 16.10 Draw, drains N. 45° E., asc. 100 ft. over E. slope.
- 20.25 Spur, slopes N., desc. 40 ft. over W. slope.
- 29.35 Wash, 15 lks. wide, 3 ft. deep, at base of spur, drains N. 20° E., asc. 10 ft. over NE. slope.
- 39.80 Trail road, bears N. 15° E. and S.
- 40.21 Point for the 1/4 sec. cor. of secs. 6 and 31 at proportionate dist.; there is no remaining evidence of the original cor.
- Set a plastic post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.
- T11S R8W
- ½ S31
- S6
- T12S R8W
- 1967
- 43.60 Trail road, bears N. 45° W. and S. 45° E., asc. 130 ft. over NE. slope.
- 56.00 Wash, drains N. 45° E.
- 62.05 Point of spur, slopes N., desc. 25 ft. over W. slope.
- 64.50 Small draw, drains N., asc. 20 ft. over E. slope.
- 66.75 Spur, slopes N., desc. 15 ft. over W. slope.

Dependent Resurvey of the South Boundary, T. 11 S., R. 8 W.

CHAINS

- 68.70 Small draw, drains N., asc. 70 ft. over E. slope.
- 74.80 Spur, slopes N., desc. 20 ft. over NW. slope.
- 75.99 The cor. of Tps. 11 and 12 S., R. 8 W., monumented with an iron post, 3 ins. diam., firmly set and properly mkd. as described in the official record of the 1936 survey.
- Land, rolling.
Soil, gravelly loam.
Timber, widely scattered pinon and juniper.
Undergrowth, sagebrush.

Dependent Resurvey of a Portion of the
Subdivision, T. 11 S., R. 8 W.

Reestablishment of the Survey Executed
by Joseph Gorkinski in 1876.

From the cor. of secs. 1, 2, 35 and 36, on the S. bdy.
of the Tp.

N. 0° 05' W., bet. secs. 35 and 36.

Over gently rolling desert land through shadscale
undergrowth.

- 2.65 Wash, 20 lks. wide, 5 ft. deep, drains W.
- 14.15 Wash, 10 lks. wide, 3 ft. deep, drains S. 85° W.
- 39.79 The 1/4 sec. cor. of secs. 35 and 36, monumented with a porphyry stone, 9x6x4 ins., firmly set and plainly mkd. 1/4 on W. face.

At the cor. point

Set a plastic post, 30 ins. long, 2½ ins. diam., 24
ins. in the ground, and in a collar of stone, with
brass cap mkd.

T11S R8W

½

S35|S36

1967

Bury original stone cor. alongside the plastic
post.

N. 0° 21' E., beginning new measurement.

- 0.15 Judd Creek, 20 lks. wide, 4 ft. deep, drains S. 45° W.,
curving W.

Dependent Resurvey of a Portion of the Subdivision, T. 11 S., R. 8 W.

CHAINS

17.75 Wash, 15 lks. wide, 5 ft. deep, drains S. 40° W.

39.75 The cor. of secs. 25, 26, 35 and 36, monumented with a sandstone, 22x14x4 ins., firmly set and plainly mkd. 1 notch on S. and E. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T11S R8W

S26	S25
S35	S36

1967

Bury original stone cor. alongside iron post.

No accessories available.

Land, gently rolling desert.

Soil, clay.

No timber.

Undergrowth, shadscale.

From the cor. of secs. 25 and 36, on the E. bdy. of the Tp., monumented with an iron post, 3 ins. diam., firmly set and properly mkd. as described in the official record of the 1915 survey.

S. 89° 45' W., bet. secs. 25 and 36.

Over gently rolling land through shadscale undergrowth.

6.50 Wash, 10 lks. wide, 2 ft. deep, drains S. 20° W.

19.20 Wash, 15 lks. wide, 3 ft. deep, drains S. 30° W.

39.93 The 1/4 sec. cor. of secs. 25 and 36, monumented with a porphyry stone, 10x10x8 ins., firmly set and plainly mkd. 1/4 on N. face.

At the cor. point

Set a plastic post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

T11S R8W

¼	S25
	S36

1967

Bury original stone cor. alongside plastic post.

S. 89° 42' W., beginning new measurement.

Dependent Resurvey of a Portion of the Subdivision, T. 11 S., R. 8 W.

CHAINS

16.00 Wash, 10 lks. wide, 4 ft. deep, drains S, 70° W.

39.99 The cor. of secs. 25, 26, 35 and 36.

Land, gently rolling desert.

Soil, clay.

No timber.

Undergrowth, shadscale.

N. 0° 15' E., bet. secs. 25 and 26.

Over gently rolling desert land through shadscale undergrowth.

13.35 Wash, 10 lks. wide, 3 ft. deep, drains nearly W.

27.85 Wash, 10 lks. wide, 3 ft. deep, drains W.

32.70 Wash, 30 lks. wide, 5 ft. deep, drains S. 30° W.

40.19 The 1/4 sec. cor. of secs. 25 and 26, monumented with a sandstone, 12x10x5 ins., firmly set and plainly mkd. 1/4 on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T11S R8W

½

S26 | S25

1967

Bury original stone cor. alongside iron post.

No accessories available.

N. 0° 01' W., beginning new measurement.

14.40 Wash, 15 lks. wide, 3 ft. deep, drains W.

19.40 Wash, 20 lks. wide, 4 ft. deep, drains S. 30° W.

38.40 Wash, 10 lks. wide, 3 ft. deep, drains S. 15° W.

40.91 The cor. of secs. 23, 24, 25 and 26, monumented with a sandstone, 11x9x6 ins., firmly set and plainly mkd. 2 notches on S. and 1 on E. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T11S R8W

S23 | S24

S26 | S25

1967

Bury original stone cor. alongside iron post.

Dependent Resurvey of a Portion of the Subdivision, T. 11 S., R. 8 W.

CHAINS

Raise a mound of stone, 2½ ft. base, 1½ ft. high,
W. of cor.

Land, gently rolling desert.
Soil, clay.
No timber.
Undergrowth, shadscale.

From the cor. of secs. 24 and 25, on the E. bdy. of the
Tp., monumented with an iron post, 3 ins. diam., firmly
set and properly mkd. as described in the official record
of the 1915 survey.

N. 89° 46' W., bet. secs. 24 and 25.

Over gently rolling desert land through shadscale
undergrowth.

- 3.50 Trail road, bears N. 40° W. and S. 40° E.
- 12.30 Trail road, bears N. 45° E. and S. 45° W.
- 28.70 Improved dirt road, bears N. 50° W. and S. 50° E.
- 39.72 The 1/4 sec. cor. of secs. 24 and 25, monumented with a
sandstone, 10x10x6 ins., firmly set and plainly mkd. 1/4
on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T11S R8W

½	S24
	S25

1967

Bury original stone cor. alongside iron post.

No accessories available.

N. 89° 53' W., beginning new measurement.

- 22.20 Wash, 15 lks. wide, 3 ft. deep, drains S. 20° W.
- 24.10 Wash, 15 lks. wide, 3 ft. deep, drains S.
- 38.85 Wash, 10 lks. wide, 3 ft. deep, drains S. 20° W.
- 40.11 The cor. of secs. 23, 24, 25 and 26.

Land, gently rolling desert.
Soil, clay.
No timber.
Undergrowth, shadscale.

Dependent Resurvey of a Portion of the Subdivision, T. 11 S., R. 8 W.

CHAINS

N. 0° 17' E., bet. secs. 23 and 24.

Over gently rolling desert land through shadscale and sagebrush undergrowth. Asc. 55 ft. over gentle S. slope.

18.30 Trail road, bears N. 75° W. and S. 75° E.

36.50 Wash, 10 lks. wide, 2 ft. deep, drains S. 10° W.

40.09 The 1/4 sec. cor. of secs. 23 and 24, monumented with a flintstone, 15x10x6 ins., firmly set and plainly mkd. 1/4 on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

T11S R8W

½

S23|S24

1967

Bury original stone cor. alongside iron post.

N. 0° 19' E., beginning new measurement.

Asc. 55 ft. over gentle S. slope.

9.55 Improved dirt road, bears N. 50° W. and S. 50° E.

41.18 The cor. of secs. 13, 14, 23 and 24, monumented with an iron post, 2½ ins. diam., firmly set and properly mkd. as described in the official record of the 1960 survey.

Land, gently rolling desert.

Soil, sandy clay.

No timber.

Undergrowth, shadscale and sagebrush.

From the cor. of secs. 13 and 24, on the E. bdy. of the Tp., monumented with an iron post, 3 ins. diam., firmly set and properly mkd. as described in the official record of the 1915 survey.

N. 89° 16' W., bet. secs. 13 and 24.

Over gently rolling desert land through shadscale and sagebrush undergrowth.

3.65 Improved dirt road, bears N. 50° W. and S. 50° E.

Dependent Resurvey of a Portion of the Subdivision, T. 11 S., R. 8 W.

CHAINS

23.30 Wash, 15 lks. wide, 3 ft. deep, drains S.

39.64 Point for the 1/4 sec. cor. of secs. 13 and 24 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 16 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T11S R8W

¼ $\frac{S13}{S24}$

1967

40.95 Trail road, bears nearly N. and S. about 4.00 chs.; thence S. 50° E.

79.28 The cor. of secs. 13, 14, 23 and 24.

Land, gently rolling.

Soil, rocky clay.

No timber.

Undergrowth, shadscale and sagebrush.

From the cor. of secs. 2, 3, 34 and 35, on the S. bdy. of the Tp.

N. 0° 02' E., bet. secs. 34 and 35.

Over nearly level desert land through shadscale and greasewood undergrowth.

12.30 Judd Creek, 15 lks. wide, 4 ft. deep, drains S. 60° W.

24.00 Leave greasewood.

40.25 The 1/4 sec. cor. of secs. 34 and 35, monumented with a sandstone, 10x8x6 ins., firmly set and plainly mkd. 1/4 on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T11S R8W

¼

S34|S35

1967

Bury original stone cor. alongside iron post.

No accessories available.

Dependent Resurvey of a Portion of the Subdivision, T. 11 S., R. 8 W.

CHAINS

N. 0° 06' E., beginning new measurement.

- 4.65 Wash, 20 lks. wide, 4 ft. deep, drains S. 75° W.
 15.15 Wash, 15 lks. wide, 4 ft. deep, drains S. 75° W.
 38.65 Wash, 10 lks. wide, 3 ft. deep, drains S. 50° W.
 40.41 Point for the cor. of secs. 26, 27, 34 and 35 at proportionate dist.; there is no remaining evidence of the original cor.

Set a plastic post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T11S R8W

S27	S26
S34	S35

1967

Land, gently rolling desert.
 Soil, clay.
 No timber.
 Undergrowth, shadscale and greasewood.

From the cor. of secs. 25, 26, 35 and 36.

N. 88° 44' W., bet. secs. 26 and 35.

Over gently rolling desert land through shadscale undergrowth.

- 26.30 Wash, 20 lks. wide, 5 ft. deep, drains S. 15° W.
 40.10 The 1/4 sec. cor. of secs. 26 and 35, monumented with a sandstone, 10x8x4 ins., firmly set and plainly mkd. 1/4 on N. face.

At the cor. point

Set a plastic post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

T11S R8W

¼	S26
	S35

1967

Bury original stone cor. alongside plastic post.

N. 89° 00' W., beginning new measurement.

- 6.90 Wash, 20 lks. wide, 4 ft. deep, drains S. 60° W.
 38.10 Wash, 10 lks. wide, 4 ft. deep, drains S. 45° W.

Dependent Resurvey of a Portion of the Subdivision, T. 11 S., R. 8 W.

CHAINS

- 40.11 The cor. of secs. 26, 27, 34 and 35.
Land, gently rolling desert.
Soil, clay.
No timber.
Undergrowth, shadscale.
-
- N. 0° 32' E., bet. secs. 26 and 27.
Over nearly level desert land through shadscale undergrowth.
- 4.85 Wash, 15 lks. wide, 3 ft. deep, drains S. 50° W.
- 35.75 Wash, 20 lks. wide, 3 ft. deep, drains nearly W.
- 40.41 The 1/4 sec. cor. of secs. 26 and 27, monumented with a sandstone, 8x6x4 ins., firmly set and plainly mkd. 1/4 on W. face.
At the cor. point
Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
- T11S R8W
½
S27|S26
1967
- Bury original stone cor. alongside iron post.
No accessories available.
-
- N. 0° 26' E., beginning new measurement.
Asc. 25 ft. over gently rolling land.
- 17.05 Wash, 15 lks. wide, 3 ft. deep, drains W.
- 22.00 Wash, 20 lks. wide, 3 ft. deep, drains S. 30° W.
- 40.34 The cor. of secs. 22, 23, 26 and 27, monumented with a sandstone, 12x10x8 ins., firmly set and plainly mkd. 2 notches on S. and E. edges.
At the cor. point
Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
- T11S R8W
S22|S23
S27|S26
1967
- Bury original stone cor. alongside iron post.

Dependent Resurvey of a Portion of the Subdivision, T. 11 S., R. 8 W.

CHAINS

No accessories available.

Land, gently rolling desert.

Soil, clay.

No timber.

Undergrowth, shadscale.

From the cor. of secs. 23, 24, 25 and 26.

N. 89° 52' W., bet. secs. 23 and 26.

Over gently rolling desert land through shadscale undergrowth.

11.10 Wash, 15 lks. wide, 3' deep, drains S.

19.40 Wash, 15 lks. wide, 2 ft. deep, drains S.

40.18 The 1/4 sec. cor. of secs. 23 and 26, monumented with a sandstone, 13x6x5 ins., firmly set and plainly mkd. 1/4 on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T11S R8W

$$\frac{1}{2} \frac{S23}{S26}$$

1967

Bury original stone cor. alongside iron post.

No accessories available.

N. 88° 25' W., beginning new measurement.

0.10 Wash, 10 lks. wide, 3 ft. deep, drains S. 20° W.

9.60 Wash, 20 lks. wide, 3 ft. deep, drains S.

14.70 Trail road, bears N. 20° E. and S. 20° W., curving SW.

23.60 Wash, 10 lks. wide, 3 ft. deep, drains S., curving SW.

39.44 The cor. of secs. 22, 23, 26 and 27.

Land, gently rolling desert.

Soil, clay.

No timber.

Undergrowth, shadscale.

N. 0° 08' E., bet. secs. 22 and 23.

Dependent Resurvey of a Portion of the Subdivision, T. 11 S., R. 8 W.

CHAINS	
9.90	Asc. 55 ft. over gently rolling desert land through shadscale undergrowth.
28.00	Wash, 10 lks. wide, 2 ft. deep, drains S. 20° W.
40.85	Wash, 15 lks. wide, 2 ft. deep, drains S. 75° W.
	The 1/4 sec. cor. of secs. 22 and 23, monumented with a sandstone, 12x10x8 ins., firmly set and plainly mkd. 1/4 on W. face.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T11S R8W ↓ S22 S23 1967
	Bury original stone cor. alongside iron post.
	No accessories available.
	North, beginning new measurement.
	Asc. 70 ft. over gently rolling desert land.
0.55	Trail road, bears nearly E. and W.
40.50	The cor. of secs. 14, 15, 22 and 23, monumented with a granite stone, 16x10x6 ins., firmly set and plainly mkd. 3 notches on S. and 2 on E. edges.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.
	T11S R8W S15 S14 S22 S23 1967
	Bury original stone cor. alongside iron post.
	Land, gently rolling desert. Soil, gravelly clay. No timber. Undergrowth, shadscale and sagebrush.
	From the cor. of secs. 13, 14, 23 and 24. N. 88° 21' W., bet. secs. 14 and 23.

Dependent Resurvey of a Portion of the Subdivision, T. 11 S., R. 8 W.

CHAINS

Over gently rolling desert land through shadscale and sagebrush undergrowth.

23.45 Wash, 15 lks. wide, 3 ft. deep, drains S.

34.55 Wash, 15 lks. wide, 2 ft. deep, drains S.

35.00 Trail road, bears S. 50° E. and N. 50° W., curving N.

39.60 Wash, 10 lks. wide, 2 ft. deep, drains S.

39.75 The 1/4 sec. cor. of secs. 14 and 23, monumented with a granite stone, 14x8x6 ins., firmly set and plainly mkd. 1/4 on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T11S R8W

½ $\frac{S14}{S23}$

1967

Bury original stone cor. alongside iron post.

No accessories available.

N. 89° 50' W., beginning new measurement.

10.45 Wash, 10 lks. wide, 2 ft. deep, drains S.

15.10 Wash, 10 lks. wide, 2 ft. deep, drains S.

40.14 The cor. of secs. 14, 15, 22 and 23.

Land, gently rolling desert.

Soil, gravelly clay.

No timber.

Undergrowth, shadscale and sagebrush.

N. 0° 22' E., bet. secs. 14 and 15.

Over gently sloping desert land through shadscale and sagebrush undergrowth. Asc. 110 ft. over gently rolling S. slope.

13.57 Improved dirt road, bears N. 60° E. and S. 60° W.

23.05 Wash, 15 lks. wide, 4 ft. deep, drains S. 20° W.

26.25 Trail road, bears irregularly E. and W.

Dependent Resurvey of a Portion of the Subdivision, T. 11 S., R. 8 W.

CHAINS

40.12

The 1/4 sec. cor. of secs. 14 and 15, monumented with a granite stone, 16x10x6 ins., firmly set and plainly mkd. 1/4 on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T11S R8W

½
S15|S14

1967

Bury original stone cor. alongside iron post.

N. 0° 01' E., beginning new measurement.

Asc. 115 ft. over gently rolling SW. slope.

40.28

The cor. of secs. 10, 11, 14 and 15, monumented with an iron post, 2½ ins. diam., set and properly mkd. as described in the official record of the 1960 survey.

Land, gently rolling desert.

Soil, gravelly.

No timber.

Undergrowth, shadscale and sagebrush.

From the cor. of secs. 3, 4, 33 and 34, on the S. bdy. of the Tp.

N. 0° 01' W., bet. secs. 33 and 34.

Over nearly level desert land through dense greasewood and shadscale undergrowth.

4.20

Wash, 15 lks. wide, 3 ft. deep, drains W.

5.90

Wash, 15 lks. wide, 4 ft. deep, drains S. 80° W.

20.02

Fence, bears E. and W.

Dependent Resurvey of a Portion of the Subdivision, T. 11 S., R. 8 W

CHAINS

40.19 The 1/4 sec. cor. of secs. 33 and 34, monumented with a porphyry stone, 10x8x6 ins., firmly set and plainly mkd. 1/4 on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T11S R8W

¼

S33|S34

1967

Bury original stone cor. alongside iron post.

No accessories available.

N. 0° 03' E., beginning new measurement.

Asc. 45 ft. over gently sloping land.

16.20 Wash, 15 lks. wide, 3 ft. deep, drains nearly W.

40.26 The cor. of secs. 27, 28, 33 and 34, monumented with a porphyry stone, 13x10x6 ins., firmly set and plainly mkd. 1 notch on S. and 3 on E. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

T11S R8W

S28|S27
S33|S34

1967

Bury original stone cor. alongside iron post.

Land, nearly level S. portion; gently rolling N. portion.

Soil, clay.

No timber.

Undergrowth, dense greasewood and shadscale.

Dependent Resurvey of a Portion of the Subdivision, T. 11 S., R. 8 W.

CHAINS

From the cor. of secs. 26, 27, 34 and 35.

S. 89° 35' W., bet. secs. 27 and 34.

Over nearly level land through greasewood undergrowth.

10.30 Wash, 15 lks. wide, 3 ft. deep, drains S. 30° W.

40.12 The 1/4 sec. cor. of secs. 27 and 34, monumented with a sandstone, 10x8x5 ins., firmly set and plainly mkd. 1/4 on N. face.

At the cor. point

Set a plastic post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T11S R8W

¼ — S27
S34

1967

Bury original stone cor. alongside plastic post.

No accessories available.

N. 89° 20' W., beginning new measurement.

8.00 Wash, 20 lks. wide, 4 ft. deep, drains S. 20° W.

29.05 Wash, 10 lks. wide, 3 ft. deep, drains S. 30° W.

39.95 The cor. of secs. 27, 28, 33 and 34.

Land, nearly level.

Soil, clay.

No timber.

Undergrowth, dense greasewood.

N. 0° 27' W., bet. secs. 27 and 28.

Over gently sloping land through dense greasewood undergrowth. Asc. 45 ft. over SW. slope.

Dependent Resurvey of a Portion of the Subdivision, T. 11 S., R. 8 W

CHAINS

- 4.90 Wash, 15 lks. wide, 3 ft. deep, drains S. 45° W.
- 40.24 The 1/4 sec. cor. of secs. 27 and 28, monumented with a sandstone, 12x10x6 ins., firmly set and plainly mkd. 1/4 on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T11S R8W

¼

S28|S27

1967

Bury original stone cor. alongside iron post.

No accessories available.

N. 0° 50' E., beginning new measurement.

Asc. 35 ft. over gently rolling land.

- 30.20 Wash, 20 lks. wide, 3 ft. deep, drains S. 30° W.

- 40.21 The cor. of secs. 21, 22, 27 and 28, monumented with a porphyry stone, 8x6x5 ins., firmly set and plainly mkd. 2 notches on S. and 3 on E. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T11S R8W

S21|S22

S28|S27

1967

Bury original stone cor. alongside iron post.

No accessories available.

Dependent Resurvey of a Portion of the Subdivision, T. 11 S., R. 8 W.

CHAINS

Land, gently rolling desert.
Soil, sandy clay.
No timber.
Undergrowth, greasewood and shadscale.

From the cor. of secs. 22, 23, 26 and 27.

S. 89° 52' W., bet. secs. 22 and 27.

Over gently rolling land through shadscale undergrowth.

- 6.00 Wash, 10 lks. wide, 3 ft. deep, drains S.
11.30 Low spur, 15 ft. high, slopes S.
20.10 Wash, 10 lks. wide, 3 ft. deep, drains S. 30° W.
28.10 Wash, 10 lks. wide, 2 ft. deep, drains S.
40.24 Point for the 1/4 sec. cor. of secs. 22 and 27 at proportionate dist.; there is no remaining evidence of the original cor.

Set a plastic post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

T11S R8W

½ $\frac{S22}{S27}$

1967

Continue over gently rolling land.

- 42.60 Wash, 10 lks. wide, 2 ft. deep, drains S. 20° W.
44.10 Wash, 15 lks. wide, 4 ft. deep, drains S. 15° W.
65.40 Wash, 15 lks. wide, 3 ft. deep, drains S. 60° W.
72.70 Wash, 15 lks. wide, 4 ft. deep, drains S.
80.48 The cor. of secs. 21, 22, 27 and 28.

Land, gently rolling.
Soil, sandy clay.
No timber.
Undergrowth, shadscale.

N. 0° 14' E., bet. secs. 21 and 22.

Over gently rolling desert land through shadscale and sagebrush undergrowth. Asc. 60 ft. over SW. slope.

- 1.00 Wash, 10 lks. wide, 2 ft. deep, drains S. 45° W.
27.70 Wash, 15 lks. wide, 3 ft. deep, drains S. 35° W.

Dependent Resurvey of a Portion of the Subdivision, T. 11 S., R. 8

CHAINS

- 40.08 The 1/4 sec. cor. of secs. 21 and 22, monumented with a sandstone, 14x10x6 ins., firmly set and plainly mkd. 1/4 on W. face.
- At the cor. point
- Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.
- T11S R8W
S21 | S22
1967
- Bury original stone cor. alongside iron post.
-
- N. 0° 03' E., beginning new measurement.
- Asc. 80 ft. over gently rolling SW. slope.
- 31.70 Trail road, bears irregularly E. and W.
- 31.75 Wash, 15 lks. wide, 3 ft. deep, drains S. 30° W. Enter widely scattered timber.
- 39.80 The cor. of secs. 15, 16, 21 and 22, monumented with a sandstone, 18x11x6 ins., firmly set and plainly mkd. 3 notches on S. and E. edges.
- from which the original bearing tree
- A juniper, 24 ins. diam., bears S. 39° 15' E., 99 lks. dist., mkd. T11S R8W S22 BT.
- At the cor. point
- Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
- T11S R8W
S16 | S15
S21 | S22
1967
- Bury original stone cor. alongside iron post.
- Raise a mound of stone, 2½ ft. base, 1½ ft. high W. of cor.
- Land, gently rolling desert,
Soil, gravelly.
Timber, widely scattered juniper N. portion; no timber S. portion.
Undergrowth, sagebrush and shadscale.
- From the cor. of secs. 14, 15, 22 and 23.

Dependent Resurvey of a Portion of the Subdivision, T. 11 S., R. 8 W.

CHAINS

S. 88° 56' W., bet. secs. 15 and 22.

Over gently rolling land through sagebrush and shadscale undergrowth.

2.35 Wash, 10 lks. wide, 3 ft. deep, drains S.

24.05 Improved dirt road, bears N. 60° E. and S. 60° W.

40.17 Point for the 1/4 sec. cor. of secs. 15 and 22 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 16 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T11S R8W

½ $\frac{S15}{S22}$

1967

40.30 Bottom of small draw, 1.00 ch. wide, 10 ft. deep, drains S.

56.00 Enter widely scattered timber.

72.80 Wash, 20 lks. wide, 4 ft. deep, drains S. from N. 45° E.

73.40 Trail road, bears N. and S.

80.20 Wash, 20 lks. wide, 4 ft. deep, drains nearly S.

80.34 The cor. of secs. 15, 16, 21 and 22.

Land, gently rolling.

Soil, rocky gravel.

Timber, widely scattered juniper W. portion; no timber E. portion.

Undergrowth, sagebrush and shadscale.

N. 0° 10' E., bet. secs. 15 and 16.

Over rolling land through scattered timber.

0.20 Wash, 20 lks. wide, 4 ft. deep, drains nearly S. from N. 10° W., asc. 85 ft. over gently rolling S. slope.

36.00 Trail road, bears irregularly E. and W.

41.32 Point for the 1/4 sec. cor. of secs. 15 and 16 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T11S R8W

½ $\frac{S16}{S15}$

1967

Raise a mound of stone, 2½ ft. base, 1½ ft. high.

Dependent Resurvey of a Portion of the Subdivision, T. 11 S., R. 8 W.

CHAINS

- Asc. 90 ft. over gently rolling bench land through scattered timber.
- 82.64 The cor. of secs. 9, 10, 15 and 16, monumented with a porphyry stone, 18x12x8 ins., firmly set and plainly mkd. 4 notches on S. and 3 on E. edges.
- At the cor. point:
- Set an iron post, 30 ins. long, 2½ ins. diam., 4 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.
- T11S R8W
- | | |
|-----|-----|
| S9 | S10 |
| S16 | S15 |
- 1967
- Bury original stone cor. alongside iron post.
- Land, gently rolling bench land.
Soil, rocky gravel.
Timber, widely scattered juniper and pinon.
Undergrowth, sagebrush.
-
- From the cor. of secs. 10, 11, 14 and 15.
- N. 89° 32' W., bet. secs. 10 and 15.
- Over gently rolling land through sagebrush undergrowth. Desc. 20 ft. along rolling S. slope.
- 40.17 Point for the ¼ sec. cor. of secs. 10 and 15 at proportionate dist.; there is no remaining evidence of the original cor.
- Set a plastic post, 30 ins. long, 2½ ins. diam., 16 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.
- T11S R8W
- | | | |
|---|-----|--|
| ¼ | S10 | |
| | S15 | |
- 1967
- Raise a mound of stone, 2½ ft. base, 1½ ft. high, N. of cor.
- Desc. 65 ft. over gently rolling bench land.
- 70.00 Enter timber, bears N. and S.
- 80.34 The cor. of secs. 9, 10, 15 and 16.

Dependent Resurvey of a Portion of the Subdivision, T. 11 S., R. 8 W.

CHAINS

Land, gently rolling.
 Soil, rocky gravel.
 Timber, pinon and juniper W. portion; no timber E. portion.
 Undergrowth, sagebrush.

N. 0° 21' E., bet. secs. 9 and 10.

Over rolling land through medium dense timber. Asc. 110 ft. over SW. slope.

- 25.70 Draw, 1.00 ch. wide, 10 ft. deep, drains S. 40° W.
- 29.95 Trail road, bears N. 50° E. and S. 50° W. Leave timber.
- 40.00 Point for the 1/4 sec. cor. of secs. 9 and 10 at record dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground to bedrock, and in a collar of stone to top, with brass cap mkd.

T11S R8W

½
 S9|S10

1967

Desc. 10 ft. over NW. slope.

- 42.00 Wash, 10 lks. wide, 2 ft. deep, drains S. 40° W., asc. 25 ft. over SE. slope.
- 56.70 Spur, slopes S. 45° W., desc. 25 ft. over NW. slope.
- 60.70 Bottom of small draw, 12 ft. deep, drains S. 40° W., asc. 75 ft. over SE. slope.
- 72.65 Ridge, bears N. 50° E. and S. 50° W., desc. 65 ft. over NW. slope.
- 75.05 Large flat draw, drains S. 50° W., asc. 45 ft. over SE. slope.
- 80.00 Point for the cor. of secs. 3, 4, 9 and 10 at proportionate dist. longitudinally and record dist. latitudinally; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 16 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T11S R8W

S4|S3
 S9|S10

1967

Land, rolling.
 Soil, rocky gravel.
 Timber, medium dense pinon and juniper S. portion.

Dependent Resurvey of a Portion of the Subdivision, T. 11 S., R. 8 W.

CHAINS

Undergrowth, sagebrush.

From the cor. of secs. 2, 3, 10 and 11, monumented with an iron post, 2½ ins. diam., set and properly mkd. as described in the official record of the 1960 survey.

N. 89° 49' W., bet. secs. 3 and 10.

Over rolling land through sagebrush and shadscale undergrowth. Desc. 60 ft. along rolling S. slope.

12.30 Wash, 15 lks. wide, 3 ft. deep, drains S.

14.70 Trail road, bears irregularly N. and S.

15.70 Trail road, bears N. 45° W. and S. 45° E.

39.92 Point for the 1/4 sec. cor. of secs. 3 and 10 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 16 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T11S R8W

½	S3
	S10
	1966

Asc. 5 ft. over SE. slope.

41.95 Trail road, on spur, bears N. and S.; desc. 50 ft. over NW. slope.

46.15 Draw, drains S. 45° W., asc. 10 ft. over SE. slope.

54.15 Spur, slopes S. 45° W., desc. 100 ft. over NW. slope.

58.15 Draw, drains S. 45° W., asc. 70 ft. over SE. slope.

69.65 Ridge, bears N. 60° E. and S. 60° W., with trail road along top, desc. 95 ft. over NW. slope.

74.00 Wash, 1.00 ch. wide, 4 ft. deep, drains S. 50° W., asc. 40 ft. over SE. slope.

79.84 The cor. of secs. 3, 4, 9 and 10.

Land, rolling.

Soil, rocky gravel.

No timber.

Undergrowth, dense sagebrush.

From the cor. of secs. 4, 5, 32 and 33, on the S. bdy. of the Tp.

N. 0° 11' W., bet. secs. 32 and 33.

Over nearly level land over cultivated land.

Dependent Resurvey of a Portion of the Subdivision, T. 11 S., R. 8 W.

CHAINS

- 0.84 Fence, bears nearly E. and W. 78 lks. to cor.; thence N. and S. Leave cultivated land, enter dense greasewood.
- 14.68 Fence, bears E. and W. 65 lks. to fence bearing N. and S.
- 37.78 Fence, bears E. and W. 70 lks. to fence bearing N. and S.
- 39.91 The 1/4 sec. cor. of secs. 32 and 33, monumented with a sandstone, 10x6x4 ins., firmly set and plainly mkd. 1/4 on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T11S R8W

½
S32 | S33

1967

Bury original stone cor. alongside iron post.

Cor. is 70 lks. E. of N. and S. fence line.

N. 0° 20' E., beginning new measurement.

Continue over nearly level land through dense greasewood.

- 40.33 Point for the cor. of secs. 28, 29, 32 and 33 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

T11S R8W

S29 | S28
S32 | S33

1967

Land, nearly level.

Soil, clay.

No timber.

Undergrowth, dense greasewood.

From the cor. of secs. 27, 28, 33 and 34.

N. 89° 58' W., bet. secs. 28 and 33.

Over nearly level land through greasewood undergrowth.

Dependent Resurvey of a Portion of the Subdivision T. 11 S. R. 8 W.

CHAINS

- 5.80 Wash, 15 lks. wide, 3 ft. deep, drains S. 45° W.
- 22.30 Fence, bears S. and N. 2.00 chs., thence nearly W.
- 39.87 Point for the 1/4 sec. cor. of secs. 28 and 33 at proportionate dist.; there is no remaining evidence of the original cor.

Set a plastic post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

T11S R8W

$$\frac{1}{2} \frac{S28}{S33}$$

1967

From this cor., a water well bears N. 82° 07' W., 14.02 chs. dist.

Continue over nearly level land through greasewood.

- 79.74 The cor. of secs. 28, 29, 32 and 33.

Land, nearly level.
Soil, clay.
No timber.
Undergrowth, greasewood.

N. 0° 15' W., bet. secs. 28 and 29.

Over nearly level land through greasewood undergrowth.

- 2.00 Fence, bears nearly E. and W. 1.20 chs.; thence S.

- 40.33 The 1/4 sec. cor. of secs. 28 and 29, monumented with a porphyry stone, 10x8x6 ins., firmly set and plainly mkd. 1/4 on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T11S R8W

$$\frac{1}{2} \frac{S29}{S28}$$

1967

Bury original stone cor. alongside iron post.

Set a post, 2x4 ins., 6 ft. long on N. side of cor.

N. 0° 05' E., beginning new measurement.

Continue over nearly level land.

Dependent Resurvey of a Portion of the Subdivision, T. 11 S., R. 8 W.

CHAINS							
35.00	Wash, 15 lks. wide, 3 ft. deep, drains S. 50° W.						
40.28	The cor. of secs. 20; 21, 28 and 29, monumented with a porphyry stone, 10x8x6 ins., firmly set and plainly mkd. 2 notches on S. and 4 on E. edges.						
	At the cor. point						
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.						
	T11S R8W						
	<table border="0"> <tr> <td>S20</td> <td> </td> <td>S21</td> </tr> <tr> <td>S29</td> <td> </td> <td>S28</td> </tr> </table>	S20		S21	S29		S28
S20		S21					
S29		S28					
	1967						
	Bury original stone cor. alongside iron post.						
	No accessories available.						
	Land, nearly level. Soil, clay. No timber. Undergrowth, shadscale.						
	From the cor. of secs. 21, 22, 27 and 28. N. 89° 43' W., bet. secs. 21 and 28. Over gently rolling land through shadscale undergrowth.						
0.90	Wash, 15 lks. wide, 3 ft. deep, drains S. 20° W.						
40.09	The 1/4 sec. cor. of secs. 21 and 28, monumented with a sandstone, 10x8x5 ins., firmly set and dimly mkd. 1/4 on N. face.						
	At the cor. point						
	Set a plastic post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.						
	T11S R8W						
	<table border="0"> <tr> <td>¼</td> <td>—</td> <td>S21</td> </tr> <tr> <td></td> <td></td> <td>S28</td> </tr> </table>	¼	—	S21			S28
¼	—	S21					
		S28					
	1967						
	Bury original stone cor. alongside plastic post.						
	West, beginning new measurement.						
30.00	Enter dense greasewood.						
36.50	Wash, 10 lks. wide, 2 ft. deep, drains S. 50° W.						
40.05	The cor. of secs. 20, 21, 28 and 29.						

Dependent Resurvey of a Portion of the Subdivision, T. 11 S., R. 8 W.

CHAINS

Land, nearly level to gently rolling.
Soil, clay.
No timber.
Undergrowth, shadscale E. portion; greasewood W.
portion.

N. 0° 02' E., bet. secs. 20 and 21.

Over nearly level land through greasewood undergrowth.

40.22

The 1/4 sec. cor. of secs. 20 and 21, monumented with a porphyry stone, 8x6x4 ins., firmly set and plainly mkd. 1/4 on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

T11S R8W

½

S20 | S21

1967

Bury original stone cor. alongside iron post.

N. 0° 07' E., beginning new measurement.

Asc. 50 ft. over gently rolling SW. slope.

13.95 Wash, 15 lks. wide, 3 ft. deep, drains S. 40° W.

14.45 Improved dirt road, bears N. 75° E. and S. 75° W.

17.70 Wash, 20 lks. wide, 4 ft. deep, drains S. 50° W.

35.30 Wash, 30 lks. wide, 3 ft. deep, drains S. 45° W.

40.16

The cor. of secs. 16, 17, 20 and 21, monumented with a sandstone, 12x10x8 ins., firmly set and plainly mkd. 3 notches on S. and 4 on E. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T11S R8W

S17 | S16
S20 | S21

1967

Bury original stone cor. alongside iron post.

Raise a mound of stone, 3 ft. base, 2 ft. high,
W. of cor.

Dependent Resurvey of a Portion of the Subdivision, T. 11 S., R. 8 W.

CHAINS	
	<p>Land, gently rolling. Soil, rocky loam. No timber. Undergrowth, sagebrush and shadscale.</p>
	<p>From the cor. of secs. 15, 16, 21 and 22.</p> <p>N. 88° 46' W., bet. secs. 16 and 21.</p> <p>Over rolling land through widely scattered timber. Desc. 55 ft. over SW. slope.</p>
35.00	Wash, 20 lks. wide, 3 ft. deep, drains S. 15° W.
40.17	<p>The 1/4 sec. cor. of secs. 16 and 21, monumented with a sandstone, 14x8x5 ins., firmly set and plainly mkd. 1/4 on the N. face. Original bearing trees have been destroyed by fire.</p> <p>At the cor. point</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone to top, with brass cap mkd.</p> <p style="text-align: center;">T11S R8W</p> <p style="text-align: center;">½ $\frac{S16}{S21}$</p> <p style="text-align: center;">1967</p> <p style="text-align: center;">Bury original stone cor. alongside iron post.</p> <hr style="width: 20%; margin: 10px auto;"/>
	<p>S. 89° 38' W., beginning new measurement.</p> <p>Desc. 65 ft. over SW. slope.</p>
5.15	Wash, 15 lks. wide, 3 ft. deep, drains S. curving SW.
16.85	Wash, 10 lks. wide, 2 ft. deep, drains S.
27.85	Wash, 10 lks. wide, 2 ft. deep, drains S. 20° W.
35.95	Wash, 15 lks. wide, 3 ft. deep, drains S. 15° W. Leave timber.
40.07	<p>The cor. of secs. 16, 17, 20 and 21.</p> <p>Land, rolling. Soil, gravelly. Timber, scattered junipers. Undergrowth, sagebrush and shadscale.</p>

Dependent Resurvey of a Portion of the Subdivision, T. 11 S., R. 8 W.

CHAINS

N. 0° 09' E., bet. secs. 16 and 17.

Over rolling land through sagebrush undergrowth. Asc. 85 ft. over SW. slope.

26.85 Trail road, bears irregularly E. and W.

27.80 Wash, 15 lks. wide, 3 ft. deep, drains S. 45° W.

40.30 The 1/4 sec. cor. of secs. 16 and 17, monumented with a sandstone, 12x8x5 ins., firmly set and plainly mkd. 1/4 on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.

T11S R8W

½
S17|S16

1967

Bury original stone cor. alongside iron post.

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

N. 0° 13' E., beginning new measurement.

Asc. 85 ft. over gently rolling SW. slope.

15.60 Wash, 20 lks. wide, 3 ft. deep, drains S. 40° W.

39.83 The cor. of secs. 8, 9, 16 and 17, monumented with a sandstone, 18x12x6 ins., firmly set and plainly mkd. 4 notches on S. and E. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

T11S R8W

S8|S9
S17|S16

1967

Bury original stone cor. alongside iron post.

Land, rolling.

Soil, rocky gravel.

No timber.

Undergrowth, sagebrush.

Dependent Resurvey of a Portion of the Subdivision, T. 11 S., R. 8 W.

CHAINS

From the cor. of secs. 9, 10, 15 and 16.

S. 88° 43' W., bet. secs. 9 and 16.

Over rolling land through scattered timber. Desc. 10 ft. over SW. slope.

- 1.00 Wash, 40 lks. wide, 5 ft. deep, drains S.
- 8.10 Wash, in small draw, 15 ft. deep, drains S. 20° W., asc. 15 ft. over SE. slope.
- 10.40 Small spur, slopes S., desc. 60 ft. over W. slope.
- 24.50 Draw, drains S., asc. 10 ft. over E. slope.
- 29.30 Spur, slopes S., desc. 25 ft. over W. slope.
- 31.55 Draw, drains S. 20° W., asc. 20 ft. over E. slope.
- 34.40 Spur, slopes S., desc. 20 ft. over SW. slope.
- 40.04 The 1/4 sec. cor. of secs. 9 and 16, monumented with a sandstone, 14x10x6 ins., firmly set and plainly mkd. 1/4 on N. face.

At the cor. point

Set a plastic post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

T11S R8W

½ — $\frac{S9}{S16}$

1967

Bury original stone cor., alongside plastic post.

S. 88° 43' W., beginning new measurement.

Desc. 25 ft. along rolling S. slope.

- 2.35 Small draw, 15 ft. deep, drains S.
- 18.10 Wash, 50 lks. wide, 3 ft. deep, drains S. 35° W.
- 22.65 Trail road, bears N. 40° E. and S. 40° W.
- 40.19 The cor. of secs. 8, 9, 16 and 17.

Land, rolling.

Soil, rocky sand and gravel.

Timber, scattered pinon and juniper.

Undergrowth, sagebrush.

N. 0° 49' E., bet. secs. 8 and 9.

Over rolling land through widely scattered timber. Asc. 210 ft. over S. slope.

Dependent Resurvey of a Portion of the Subdivision, T. 11 S. R. 8 W.

CHAINS

- 11.50 Rim of bench, bears E. and W.; thence over gently rolling bench land.
- 21.25 Trail road, bears N. 45° E. and S. 45° W.
- 30.30 Rim of bench, bears N. 45° E. and S. 45° W., desc. 35 ft. over NW. slope.
- 40.17 Point for the 1/4 sec. cor. of secs. 8 and 9 at proportionate dist.; there is no remaining evidence of the original cor.
- Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.

T11S R8W

$$\frac{1}{2}$$
 S8|S9

1967

Desc. 20 ft. over gentle N. slope.

- 60.30 Wash, 30 lks. wide, 5 ft. deep, drains S. 65° W., asc. 25 ft. over gentle SE. slope.
- 77.50 Wash, in small draw, drains S. 80° W.
- 79.50 Wash, in small draw, drains S. 60° W.
- 80.34 The cor. of secs. 4, 5, 8 and 9, monumented with a sandstone, 20x10x5 ins., firmly set and plainly mkd. 5 notches on S. and 4 on E. edges. This cor. will now function as the cor. of secs. 8 and 9 only.

At the cor. point

Set a plastic post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T11S R8W

$$\frac{S4}{S8|S9}$$

1966

Bury original stone cor. alongside plastic post.

Land, rolling bench land.

Soil, rocky gravel.

Timber, widely scattered juniper S. portion; no timber N. portion.

Undergrowth, sagebrush.

From the cor. of secs. 3, 4, 9 and 10.

S. 88° 56' W., along the N. bdy. of sec. 9.

Dependent Resurvey of a Portion of the Subdivision, T. 11 S., R. 8 W.

CHAINS

- Over rolling land through sagebrush undergrowth.
- 15.50 Trail road, bears N. 45° E. and S. 45° W., desc. 95 ft. over NW. slope.
- 22.45 Draw, drains S. 50° W., asc. 20 ft. over SE. slope.
- 28.20 Low ridge, bears N. 30° E. and S. 30° W., desc. 85 ft. over NW. slope.
- 32.00 Draw, drains S. 35° W., asc. 20 ft. over SE. slope.
- 39.74 Point for the 1/4 sec. cor. of secs. 4 and 9 at proportionate dist.; there is no remaining evidence of the original cor. This point will now function as the N. 1/4 sec. cor. of sec. 9 only.
- Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.
- T11S R8W
- 1/4 S9
- 1966
- 40.03 Point for the S. 1/4 sec. cor. of sec. 4, hereinafter described.
- Desc. 150 ft. over gently rolling bench land.
- 52.50 Trail road, bears nearly N. and S.
- 64.05 Improved dirt road, bears N. 70° W. and S. 70° E.
- 77.50 Bottom of small draw, 20 ft. deep, drains S. 70° W.
- 79.48 The cor. of secs. 8 and 9.
- Land, rolling bench land.
Soil, rocky.
No timber.
Undergrowth, sagebrush.
- From the cor. of secs. 5, 6, 31 and 32, on the S. bdy. of the Tp.
- N. 0° 01' E., bet. secs. 31 and 32.
- Over gently rolling desert land through sagebrush and shadscale undergrowth. Desc. 25 ft. over N. slope.
- 1.90 Base of spur, bears SE. and SW., thence over gently rolling land.
- 9.20 Wash, 10 lks. wide, 3 ft. deep, drains E.
- 13.50 Trail road, bears N. 55° W. and S. 55° E.
- 37.75 Trail road, bears N. 50° E. and S. 50° W.

Dependent Resurvey of a Portion of the Subdivision, T. 11 S., R. 1 W.

CHAINS

40.29 The 1/4 sec. cor. of secs. 31 and 32, monumented with a granite stone, 12x8x4 ins., firmly set and plainly mkd. 1/4 on W. face.

At the cor. point

Set a plastic post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground, and in a collar of stone, with brass cap mkd.

T11S R8W

½

S31|S32

1967

Bury original stone cor. alongside plastic post.

N. 0° 20' E., beginning new measurement.

Continue over gently rolling desert land.

20.40 Small draw, 10 ft. deep, drains E.

27.00 Small draw, 6 ft. deep, drains nearly E.

40.24 The cor. of secs. 29, 30, 31 and 32, monumented with a sandstone, 20x12x6 ins., firmly set and plainly mkd. 1 notch on S. and 5 on E. edges.

At the cor. point

Set a plastic post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T11S R8W

S30|S29

S31|S32

1967

Bury original stone cor. alongside plastic post.

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Land, gently rolling desert.

Soil, gravelly.

No timber.

Undergrowth, sagebrush and shadscale,

From the cor. of secs. 28, 29, 32 and 33.

N. 89° 46' W., bet. secs. 29 and 32.

Over gently rolling land through greasewood and shadscale undergrowth.

Dependent Resurvey of a Portion of the Subdivision, T. 11 S., R. 8 W.

CHAINS

- 1.21 Fence, bears S. and N. 2.00 chs., thence E.
 5.00 Wash, 15 lks. wide, drains N. 20° W.
 14.05 Trail road, bears nearly N. and S.
 20.95 Trail road, bears N. 80° E. and S. 80° W.
 28.10 Improved dirt road, to Bennion Ranch, bears N. 25° W. and S. 25° E., benter sagebrush undergrowth.
 39.76 The 1/4 sec. cor. of secs. 29 and 32, monumented with a sandstone, 24x14x10 ins., firmly set and plainly mkd. 1/4 on N. face.
- At the cor. point
- Set a plastic post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.
- T11S R8W
 $\frac{1}{4}$ $\frac{S29}{S32}$
 1967
- Bury original stone cor. alongside plastic post.
-
- N. 89° 50' W., beginning new measurement.
 Asc. 75 ft. over gently rolling E. slope.
- 30.50 Wash, 20 lks. wide, 3 ft. deep, drains N. 85° E. from N. 80° W.
 39.82 The cor. of secs. 29, 30, 31 and 32.
- Land, gently rolling desert.
 Soil, gravelly clay.
 No timber.
 Undergrowth, greasewood, shadscale and sagebrush.
-
- S. 89° 41' W., bet. secs. 30 and 31.
- Over gently rolling desert land through sagebrush undergrowth. Asc. 50 ft. over gently rolling E. slope.
- 39.90 The 1/4 sec. cor. of secs. 30 and 31, monumented with a sandstone, 30x18x8 ins., firmly set and plainly mkd. 1/4 on N. face.
- At the cor. point
- Set a plastic post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

T11S R8W

 $\frac{1}{4}$ $\frac{S30}{S31}$

1967

Dependent Resurvey of a Portion of the Subdivision, T. 11 S., R. 8 W.

CHAINS

Bury original stone cor. alongside plastic post.

S. 88° 51' W., beginning new measurement.

- 0.80 Small draw, drains N. 80° E., asc. 65 ft. over E. slope. Enter widely scattered timber.
- 12.85 Rim of small bench, bears N. and S.; thence over nearly level bench land.
- 36.06 The cor. of secs. 30 and 31, on the W. bdy. of the Tp., monumented with an iron post, 2 ins. diam., set, and properly mkd. as described in the official record of the 1936 survey.

Land, gently rolling desert.
Soil, gravelly.
Timber, widely scattered juniper W. portion; no timber E. portion.
Undergrowth, sagebrush.

From the cor. of secs. 29, 30, 31 and 32.

N. 0° 18' E., bet. secs. 29 and 30.

Over gently rolling desert land through sagebrush undergrowth.

- 0.80 Wash, 20 lks. wide, 3 ft. deep, drains S. 75° E., curving E. from nearly W.
- 19.10 Wash, 20 lks. wide, 2 ft. deep, drains E., asc. 30 ft. over S. slope.
- 21.00 Trail road, bears E. and W.
- 34.70 Low spur, slopes E., desc. 55 ft. over N. slope.
- 40.14 The 1/4 sec. cor. of secs. 29 and 30, monumented with a sandstone, 14x8x6 ins., firmly set and plainly mkd. 1/4 on W. face.

At the cor. point

Set a plastic post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T11S R8W

S30 | S29

1967

Bury original stone cor. alongside plastic post.

No accessories available.

N. 0° 05' W., beginning new measurement.

Dependent Resurvey of a Portion of the Subdivision, T. 11 S., R. 8 W.

CHAINS

Desc. 90 ft. over gently rolling NE. slope.

12.70 Wash, 15 lks. wide, 3 ft. deep, drains N. 25° E.

40.22 The cor. of secs. 19, 20, 29 and 30, monumented with a sandstone, 12x10x8 ins., firmly set and plainly mkd. 2 notches on S. and 5 on E. edges.

At the cor. point

Set a plastic post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T11S R8W
S19 | S20
S30 | S29
1967

Bury original stone cor. alongside plastic post.

No accessories available.

Land, gently rolling desert.
Soil, sandy.
No timber.
Undergrowth, sagebrush.

From the cor. of secs. 20, 21, 28 and 29.

S. 89° 59' W., bet. secs. 20 and 29.

Over nearly level land through greasewood undergrowth.

9.35 Wash, 15 lks. wide, 3 ft. deep, drains S. 30° W.

39.50 Point for the 1/4 sec. cor. of secs. 20 and 29 at proportionate dist.; there is no remaining evidence of the original cor.

Set a plastic post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, with brass cap mkd.

T11S R8W
½ — S20
S29
1967

No accessories available.

41.40 Trail road, bears N. 45° W. and S. 45° E.

48.00 Wash, 15 lks. wide, drains NW.

54.00 Improved dirt road to Bennion Ranch, bears N. 35° W. and S. 35° E, Leave greasewood undergrowth and enter sagebrush.

79.00 The cor. of secs. 19, 20, 29 and 30.

Land, nearly level.
Soil, clay E. portion; sandy clay W. portion.
No timber.
Undergrowth, greasewood E. portion; sagebrush W. portion.

Dependent Resurvey of a Portion of the Subdivision, T. 11 S., R. 8 W.

CHAINS

- S. 89° 49' W., bet. secs. 19 and 30.
Over gently rolling land through sagebrush undergrowth.
Asc. 90 ft. over gentle NE. slope.
- 39.80 Improved dirt road, bears N. 65° E. and S. 65° W.
- 39.96 Point for the 1/4 sec. cor. of secs. 19 and 30 at proportionate dist.; there is no remaining evidence of the original cor.
Set a plastic post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
- T11S R8W
½ $\frac{S19}{S30}$
1967
- Raise a mound of stone, 2½ ft. base, 1½ ft. high, N. of cor.
- 45.95 Wash, 20 lks. wide, 3 ft. deep, drains N. 60° E., asc. 90 ft. over gently rolling NE. slope.
- 75.79 The cor. of secs. 19 and 30, on the W. bdy. of the Tp., monumented with an iron post, 2 ins. diam., set, and properly mkd. as described in the official record of the 1936 survey.
Land, gently rolling.
Soil, gravelly.
No timber.
Undergrowth, sagebrush.
-
- From the cor. of secs. 19, 20, 29 and 30.
N. 0° 21' E., bet. secs. 19 and 20.
Over nearly level land through sagebrush and shadscale undergrowth.
- 11.35 Trail road, bears nearly E. and W.
- 18.00 Improved dirt road, bears N. 75° E. and S. 75° W.
Enter greasewood.
- 40.20 Improved dirt road to Bennion Ranch, bears N. 40° W. and S. 40° E.
- 40.39 Point for the 1/4 sec. cor. of secs. 19 and 20 at proportionate dist.; there is no remaining evidence of the original cor.
Set a plastic post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.
- T11S R8W
½
S19 | S20
1967

Dependent Resurvey of a Portion of the Subdivision, T. 11 S., R. 8 W.

CHAINS

- 47.90 Wash, 15 lks. wide, 4 ft. deep, drains N. 30° W.
- 80.23 New fence line, bears E. and W.
- 80.78 The cor. of secs. 17, 18, 19 and 20, monumented with a sandstone, 12x10x6 ins., firmly set and plainly mkd. 3 notches on S. and 5 on E. edges.
- At the cor. point
- Set a plastic post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
- T11S R8W
 $\frac{S18}{S19} | \frac{S17}{S20}$
 1967
- Bury original stone cor. alongside plastic post.
- No accessories available.
- Land, nearly level.
 Soil, sandy clay.
 No timber.
 Undergrowth, sagebrush and greasewood.

From the cor. of secs. 16, 17, 20 and 21.

N. 89° 17' W., bet. secs. 17 and 20.

Over gently rolling land through greasewood and shade-scale undergrowth. Asc. 15 ft. over E. slope of small knoll.

- 15.15 Top of knoll, 2.00 chs. wide, desc. 50 ft. over gentle SW. slope.
- 38.84 The 1/4 sec. cor. of secs. 17 and 20, monumented with a sandstone, 10x8x6 ins., firmly set and plainly mkd. 1/4 on N. face.

At the cor. point

Set a plastic post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T11S R8W

$\frac{1}{4} \frac{S17}{S20}$

1967

Bury original stone cor. alongside plastic post.

S. 89° 53' W., beginning new measurement.

Dependent Resurvey of a Portion of the Subdivision, T. 11 S., R. 8 W.

CHAINS

- 20.00 End of fence, bearing W. is 50 lks. S. of line.
 39.82 The cor. of secs. 17, 18, 19 and 20.

Land, gently rolling.
 Soil, sandy clay.
 No timber.
 Undergrowth, greasewood and shadscale.

S. 88° 21' W., bet. secs. 18 and 19.

Over nearly level land through greasewood undergrowth.

- 16.06 Fence, bears N. and S. 1.70 chs.; thence nearly E.

- 21.15 Wash, 15 lks. wide, 3 ft. deep, drains N. 15° W.

- 27.20 Improved dirt road to Bennion Ranch, bears N. 20° W.
 and S. 20° E.

- 40.28 The 1/4 sec. cor. of secs. 18 and 19, monumented with
 a sandstone, 10x8x6 ins., firmly set and plainly mkd.
 1/4 on N. face.

At the cor. point

Set a plastic post, 30 ins. long, 2½ ins. diam., 24 ins.
 in the ground, and in a collar of stone, with brass cap
 mkd.

T11S R8W

½ $\frac{S18}{S19}$

1967

Bury original stone cor. alongside plastic post.

From this cor., a water well, bears N. 16° 01' E.,
 28.52 chs. dist.

S. 89° 45' W., beginning new measurement.

Asc. 45 ft. over gently rolling land.

- 16.00 Leave greasewood.

- 35.65 The cor. of secs. 18 and 19, on the W. bdy. of the Tp.,
 monumented with an iron post, 2 ins. diam., set and
 properly mkd. as described in the official record of
 the 1936 survey.

Land, nearly level E. portion; gently rolling W. por
 Soil, sandy clay.
 No timber.
 Undergrowth, greasewood and sagebrush.

301
241

Dependent Resurvey of a Portion of the Subdivision, T. 11 S., R. 8 W.

CHAINS

From the cor. of secs. 17, 18, 19 and 20.

N. 0° 19' E., bet. secs. 17 and 18.

Over gently rolling land through greasewood undergrowth.
Asc. 25 ft. over gently rolling SW. slope.

- 1.00 Leave greasewood and enter shadscale and sagebrush.
- 21.70 Wash, 10 lks. wide, 3 ft. deep, drains S. 30° W.
- 40.54 The 1/4 sec. cor. of secs. 17 and 18, monumented with a sandstone, 12x8x4 ins., firmly set and plainly mkd. 1/4 on W. face.

At the cor. point

Set a plastic post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T11S R8W

½
S18 | S17

1967

Bury original stone cor. alongside plastic post.

No accessories available.

N. 0° 09' W., beginning new measurement.

- 1.65 Wash, 10 lks. wide, 3 ft. deep, drains S. 35° W., asc. 200 ft. over SW. slope.
- 32.75 Flat spur, slopes S. 75° W., thence over nearly level spur.
- 40.17 The cor. of secs. 7, 8, 17 and 18, monumented with a cobblestone, 14x8x8 ins., firmly set and plainly mkd. 4 notches on S. and 5 on E. edges.

At the cor. point

Set a plastic post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T11S R8W

S7 | S8
S18 | S17

1967

Bury original stone cor. alongside plastic post.

No accessories available.

Land, gently rolling S. portion; rolling N. portion.

Soil, gravelly.

No timber.

Undergrowth, sagebrush and shadscale.

Dependent Resurvey of a Portion of the Subdivision, T. 11 S., R. 8 W.

CHAINS

From the cor. of secs. 8, 9, 16 and 17

N. 88° 46' W., bet. secs. 8 and 17.

Over gently rolling land through widely scattered timber.

4.20 Wash, 15 lks. wide, 3 ft. deep, drains S.

10.50 Small draw, 10 ft. deep, drains S.

38.30 The 1/4 sec. cor. of secs. 8 and 17, monumented with a sandstone, 12x10x7 ins., firmly set and plainly mkd. 1/4 on N. face.

At the cor. point

Set a plastic post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground, and in a mound of stone, 3 ft. base to top with brass cap mkd.

T11S R8W

½ $\frac{S8}{S17}$

1967

Bury original stone cor. alongside iron post.

N. 89° 47' W., beginning new measurement.

Asc. 20 ft. along S. slope of spur. Leave timber.

17.70 Top of ascent, slopes S., desc. 20 ft. along S. slope.

27.70 Flat spur, slopes nearly W., thence along spur.

40.49 The cor. of secs. 7, 8, 17 and 18.

Land, gently rolling.

Soil, gravelly.

Timber, widely scattered juniper E. portion; no timber W. portion.

Undergrowth, sagebrush and shadscale.

S. 87° 16' W., bet. secs. 7 and 18.

Over rolling land through sagebrush and shadscale undergrowth. Desc. 185 ft. over W. slope of spur.

17.00 Base of spur, bears N. curving NE. and S. curving SW., thence over nearly level land.

24.90 Wash, 20 lks. wide, 2 ft. deep, drains S. 45° W.

30.30 Wash, 20 lks. wide, 1 ft. deep, drains S. 50° W.

36.80 Fence, bears N. and S.

38.50 Wash, 15 lks. wide, 3 ft. deep, drains S. 20° W.

39.84 The 1/4 sec. cor. of secs. 7 and 18, monumented with a sandstone, 10x8x3 ins., firmly set and plainly mkd. 1/4 on N. face.

At the cor. point

Dependent Resurvey of a Portion of the Subdivision, T. 11 S., R. 8 W.

CHAINS

Set a plastic post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T11S R8W

$\frac{1}{4}$ $\frac{S7}{S18}$

1967

Bury original stone cor. alongside plastic post.

No accessories available.

N. $89^{\circ} 36'$ W., beginning new measurement.

8.00 Enter greasewood undergrowth.

36.07 The cor. of secs. 7 and 18, on the W. bdy. of the Tp., monumented with an iron post, 2 ins. diam., set and properly mkd. as described in the official record of the 1936 survey.

Land, rolling E. portion; nearly level W. portion.
Soil, gravelly E. portion; sandy clay W. portion.
No timber.

Undergrowth, sagebrush and shadscale E. portion;
greasewood W. portion.

From the cor. of secs. 7, 8, 17 and 18.

N. $0^{\circ} 23'$ E., bet. secs. 7 and 8.

Over rolling land through sagebrush and shadscale undergrowth. Desc. 100 ft. over gentle NW. slope.

17.00 Base of spur, thence over gently rolling land. Enter widely scattered timber.

25.15 Wash, 20 lks. wide, 3 ft. deep, drains S. 45° W.

31.65 Wash, 15 lks. wide, 4 ft. deep, drains W.

35.40 Wash, 15 lks. wide, 3 ft. deep, drains W.

40.14 Point for the $\frac{1}{4}$ sec. cor. of secs. 7 and 8 at proportionate dist.; there is no remaining evidence of the original cor.

Set a plastic post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T11S R8W

$\frac{1}{4}$ S7|S8

1967

Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

Dependent Resurvey of a Portion of the Subdivision, T. 11 S. R. 8 W.

CHAINS

55.20 Wash, 2.00 chs. wide, 4 ft. deep, drains S. 75° W.

65.00 Small draw, 10 ft. deep, drains S. 75° W.

80.28 The cor. of secs. 5, 6, 7 and 8, monumented with a sandstone, 17x10x8 ins., firmly set and plainly mkd. 5 notches on S. and E. edges. This cor. will now function as the cor. of secs. 7 and 8 only.

At the cor. point

Set a plastic post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T11S R8W

$\frac{S5}{S7|S8}$

1966

Bury original stone cor. alongside plastic post.

Land, gently rolling.

Soil, rocky gravel.

Timber, widely scattered juniper and pinon.

Undergrowth, sagebrush and shadscale.

From the cor. of secs. 8 and 9, on the S. bdy. of sec. 4.

N. 88° 56' W., along the N. bdy. of sec. 8.

Over gently rolling bench land through sagebrush and shadscale undergrowth. Desc. 170 ft. over SW. slope.

0.60 Point for the closing cor. of secs. 4 and 5, hereinafter described.

5.20 Small draw, 20 ft. deep, drains S. 20° W.

28.50 Small draw, 10 ft. deep, drains S. 40° W.

39.02 The ¼ sec. cor. of secs. 5 and 8, monumented with a sandstone, 15x8x5 ins., firmly set and plainly mkd. 1/4 on N. face. This cor. will now function as the N. 1/4 sec. cor. of sec. 8 only.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.

T11S R8W

$\frac{1}{4} \text{ S8}$

1966

Bury original stone cor. alongside iron post.

N. 89° 40' W., beginning new measurement.

Dependent Resurvey of a Portion of the Subdivision, T. 11 S., R. 8 W.

CHAINS	
	Desc. 140 ft. over gently rolling SW. slope. Enter widely scattered timber.
1.595	Point for the S. 1/4 sec. cor. of sec. 5, hereinafter described.
30.15	Small draw, 15 ft. deep, drains S. 30° W.
40.35	The cor. of secs. 7 and 8, on the S. bdy. of sec. 5. Land, gently rolling. Soil, rocky gravel. Timber, widely scattered juniper W. portion; no timber E. portion. Undergrowth, sagebrush and shadscale.
	S. 88° 51' W., along the N. bdy. of sec. 7. Over gently rolling land through widely scattered timber. Desc. 135 ft. over gently rolling SW. slope.
1.26	Point for the closing cor. of secs. 5 and 6, hereinafter described.
15.00	Small draw, 15 ft. deep, drains S. 45° W.
16.50	Leave timber.
23.50	Small draw, 10 ft. deep, drains S. 45° W.
39.60	Wash, 15 lks. wide, 4 ft. deep, drains S. 45° W.
40.27	Point for the 1/4 sec. cor. of secs. 6 and 7 at proportionate dist.; there is no remaining evidence of the original cor. This point will now function as the N. 1/4 sec. cor. of sec. 7 only. Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.
	T11S R8W <hr style="width: 50px; margin: auto;"/> ½ S7 1966
	Raise a mound of stone, 3 ft. base, 1½ ft. high, S. of cor.
	Desc. 50 ft. over gently rolling land.
41.27	Point for the S. 1/4 sec. cor. of sec. 6, hereinafter described.
44.80	Wash, 10 lks. wide, 3 ft. deep, drains S. 15° W., asc. 20 ft. over E. slope.
56.90	Small spur, slopes S., desc. 25 ft. over W. slope.
64.90	Small draw, 10 ft. deep, drains S. 20° W., asc. 15 ft. over SE. slope.

Dependent Resurvey of a Portion of the Subdivision, T. 11 S., R. 8 W.

CHAINS

72.90 Low spur, slopes S. 70° W., desc. 10 ft. over NW. slope.

75.99 The cor. of secs. 6 and 7, on the W. bdy. of the Tp., monumented with an iron post, 2 ins. diam., set and properly mkd. as described in the official record of the 1936 survey.

Land, gently rolling.
Soil, rocky sand and gravel.
Timber, widely scattered juniper E. portion; no timber W. portion.
Undergrowth, sagebrush and shadscale.

Survey of a Portion of the Subdivision,
T. 11 S., R. 8 W.

Point for the E. 1/4 sec. cor. of sec. 3, on the W. bdy. of sec. 2, 40.00 chs. of southing from the closing cor. of secs. 2 and 3.

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T11S R8W

½
S3

1966

From this cor., the 1/4 sec. cor. of secs. 2 and 3, bears S. 0° 02' E., 10.20 chs. dist., monumented with an iron post, 2½ ins. diam., set, and properly mkd. as described in the official record of the 1960 survey. This cor. will now function as the W. 1/4 sec. cor. of sec. 2 only, and was remarked to read:

T11S R8W

½
S2

1966

1960

Pt. for the 80 1/16 sec. cor. of sec. 3, on the W. bdy. of sec. 2 and 80.00 chs. of southing from the closing cor. of secs. 2 and 3.

Set a plastic post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd.

T11S R8W

1/16

S3

80

1967

Raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor.

Survey of a Portion of the Subdivision, T. 11 S., R. 8 W.

CHAINS

From this cor., the cor. of secs. 2, 3, 10 and 11, bears South, 10.20 chs. dist.

Point for the N. 1/4 sec. cor. of sec. 3, on the N. bdy. of the Tp., and 40.00 chs. of westing from the closing cor. of secs. 2 and 3.

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T10S R8W

$$\frac{1}{4} \quad S3$$

T11S R8W

1966

From this cor., the standard 1/4 sec. cor. of sec. 34, T. 10 S., R. 8 W., bears West, 3.80 chs. dist., monumented with an iron post, 1 in. diam., set and properly mkd. as described in the official record of the 1946 survey.

Point for the cor. of secs. 3 and 4, on the N. bdy. of the Tp., and 80.00 chs. of westing from the closing cor. of secs. 2 and 3.

Set a plastic post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 5 ft. base to top, with brass cap mkd.

T10S R8W

$$\frac{S34}{S4 \mid S3}$$

T11S R8W

1966

From this cor., the standard cor. of secs. 33 and 34, T. 10 S., R. 8 W., bears West, 3.80 chs. dist., monumented with an iron post, 2 ins. diam., set and properly mkd. as described in the official record of the 1946 survey.

thence

S. 0° 07' E., bet. secs. 3 and 4.

Over mountainous land through medium dense timber. Desc. 300 ft. over SE. slope.

40.00

Point for the 1/4 sec. cor. of secs. 3 and 4.

Set a plastic post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T11S R8W

$$\frac{1}{4} \quad S4 \mid S3$$

1967

Survey of a Portion of the Subdivision, T. 11 S., R. 8 W.

CHAINS

Raise a mound of stone, 3 ft. base, 1½ ft. high,
W. of cor.

Desc. 265 ft. over SE. slope.

80.00 Pt. for the 80 1/16 sec. cor. of secs. 3 and 4.

Set a plastic post, 30 ins. long, 2½ ins. diam., 20
ins. in the ground, and in a collar of stone, with
brass cap mkd.

T11S R8W

1/16

S4 | S3

80

1967

Desc. 30 ft. over gentle SE. slope.

81.60 Improved road, bears N. 75° E. and S. 75° W.

89.92 The cor. of secs. 3, 4, 9 and 10.

Land, mountainous.

Soil, rocky gravel.

Timber, medium dense pinon and juniper.

Undergrowth, sagebrush.

Point for the N. 1/4 sec. cor. of sec. 4, on the N. bdy.
of the Tp., and 40.00 chs. of westing from the cor. of
secs. 3 and 4.

Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins.
in the ground, and in a mound of stone to top, with
brass cap mkd.

T10S R8W

½ S4

T11S R8W

1966

From this cor., the standard 1/4 sec. cor. of sec. 33,
T. 10 S., R. 8 W., bears West, 3.80 chs. dist., monu-
mented with an iron post, 1 in. diam., set and properly
mkd. as described in the official record of the 1946
survey.

Point for the cor. of secs. 4 and 5, on the N. bdy. of
the Tp., and 80.00 chs. of westing from the cor. of
secs. 3 and 4.

Set an iron post, 30 ins. long, 2½ ins. diam., 16 ins.
in the ground, and in a collar of stone to top, with
brass cap mkd.

T10S R8W

S33

S5 | S4

T11S R8W

1966

Survey of a Portion of the Subdivision, T. 11 S., R. 8 W.

CHAINS

From this cor., the standard cor. of secs. 32 and 33, T. 10 S., R. 8 W., bears West 3.80 chs. dist., monumented with an iron post, 2 ins. diam., set and properly mkd. as described in the official record of the 1946 survey.

thence

S. 0° 08' E., bet. secs. 4 and 5.

Over mountainous land through widely scattered timber, by triangulation, desc. about 100 ft. over SE. slope.

20.00 Wash, in bottom of draw, drains S. 45° W., asc. about 200 ft. over NW. slope.

37.25 Top of ascent, slopes W. End triangulation, desc. 15 ft. over SW. slope.

40.00 Point for the 1/4 sec. cor. of secs. 4 and 5.

Set a plastic post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T11S R8W

½
S5|S4

1967

Thence by triangulation, desc. about 100 ft. over SW. slope.

46.00 Draw, drains W., asc. about 150 ft. over N. slope.

53.00 Ridge, bears E. and W. End triangulation. Desc. 480 ft. over S. slope.

71.50 Base of steep descent, thence over gently rolling land.

80.00 Pt. for the 80 1/16 sec. cor. of secs. 4 and 5.

Set a plastic post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

T11S R8W

1/16

S5|S4

80

1967

84.60 Improved dirt road, bears nearly E. and W.

91.76 Intersect the N. bdy. of sec. 8.

Point for the closing cor. of secs. 4 and 5.

Set a plastic post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

T11S R8W

C C

S5|S4

S8

1967

Survey of a Portion of the Subdivision, T. 11 S., R. 8 W.

CHAINS

From this cor., the cor. of secs. 8 and 9, bears S. 88° 56' E., 0.60 chs. dist., hereinbefore described.

Land, mountainous.
Soil, rocky gravel.
Timber, widely scattered juniper.
Undergrowth, sagebrush and shadscale.

Point for the S. 1/4 sec. cor. of sec. 4, on the N. bdy. of sec. 9, and midpoint bet. the cor. of secs. 3, 4, 9 and 10, and the closing cor. of secs. 4 and 5.

Set a plastic post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground, and in a collar of stone, with brass cap mkd.

T11S R8W

½ S4

1967

From this cor., the N. 1/4 sec. cor. of sec. 9, bears N. 88° 56' E., 0.29 chs. dist., hereinbefore described.

Point for the N. 1/4 sec. cor. of sec. 5, on the N. bdy. of the Tp., and 40.00 chs. of westing from the cor. of secs. 4 and 5.

Set an iron post, 30 ins. long, 2½ ins. diam., 15 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

½ S5
T11S R8W

1966

From this cor., the standard 1/4 sec. cor. of sec. 32, T. 10 S., R. 8 W., bears West 3.80 chs. dist., monumented with an iron post, 1 in. diam., set and properly mkd. as described in the official record of the 1946 survey.

Point for the cor. of secs. 5 and 6, on the N. bdy. of bdy. of the Tp., and 80.00 chs. of westing from the cor. of secs. 4 and 5.

Set a plastic post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

T10S R8W

S32
S6 | S5
T11S R8W

1967

Survey of a Portion of the Subdivision, T. 11 S., R. 8 W.

CHAINS

From this cor., the standard cor. of secs. 31 and 32, T. 10 S., R. 8 W., bears West 3.80 chs. dist., monumented with an iron post, 2 ins. diam., set and properly mkd. as described in the official record of the 1946 survey.

thence

S. 0° 08' E., bet. secs. 5 and 6.

Over rolling land through sagebrush and shadscale undergrowth.

- 2.00 Rim of bench, bears nearly E. and W., desc. 130 ft. over rolling SW. slope.
- 6.50 Draw, drains S. 50° W., continue descent over SW. slope.
- 40.00 Point for the 1/4 sec. cor. of secs. 5 and 6.
- Set a plastic post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.
- T11S R8W
¼
S6|S5
1967
- Desc. 100 ft. over rolling SW. slope.
- 43.90 Wash, 15 lks. wide, 2 ft. deep, drains S. 30° W.
- 48.00 Wash, 10 lks. wide, 2 ft. deep, drains S. 30° W.
- 57.00 Wash, 15 lks. wide, 3 ft. deep, drains S. 20° W.
- 73.10 Wash, 15 lks. wide, 2 ft. deep, drains S. 50° W.
- 80.00 Pt. for the 80 1/16 sec. cor. of secs. 5 and 6.
- Set a plastic post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

T11S R8W
1/16
S6|S5
80
1967

Survey of a Portion of the Subdivision, T. 11 S., R. 8 W.

CHAINS

90.83

Intersect the N. bdy. of sec. 7.

Point for the closing cor. of secs. 5 and 6.

Set a plastic post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 14 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T11S R8W
C C
S6 | S5

S7
1967

From this cor., the cor. of secs. 7 and 8, bears N. $88^{\circ} 51'$ E., 1.26 chs. dist., hereinbefore described.

Land, rolling.

Soil, rocky gravel.

No timber.

Undergrowth, sagebrush and shadscale.

Point for the S. $1/4$ sec. cor. of sec. 5, on the N. bdy. of sec. 8, and midpoint bet. the closing cor. of secs. 4 and 5, and the closing cor. of secs. 5 and 6.

Set a plastic post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T11S R8W
 $\frac{1}{2}$ S5
1967

Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

From this cor., the N. $1/4$ sec. cor. of sec. 8, bears S. $89^{\circ} 40'$ E., 1.595 chs. dist., hereinbefore described.

Point for the S. $1/4$ sec. cor. of sec. 6, on the N. bdy. of sec. 7, and 40.00 chs. of westing from the closing cor. of secs. 5 and 6.

Set a plastic post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T11S R8W
 $\frac{1}{2}$ S6
1967

Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

Survey of a Portion of the Subdivision, T. 11 S., R. 8 W.

CHAINS

From this cor., the N. 1/4 sec. cor. of sec. 7, bears N. 88° 51' E., 1.00 ch. dist., hereinbefore described.

Point for the N. 1/4 sec. cor. of sec. 6, on the N. bdy. of the Tp., and 40.00 chs. of westing from the cor. of secs. 5 and 6.

Set an iron post, 30 ins. long, 2½ ins. diam., 16 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T10S R8W

½ S6
T11S R8W

1967

From this cor., the standard 1/4 sec. cor. of sec. 31, T. 10 S., R. 8 W., bears West, 3.80 chs. dist., monumented with an iron post, 1 in. diam., set and properly mkd. as described in the official record of the 1946 survey.

Point for the W. 1/4 sec. cor. of sec. 6, on the W. bdy. of the Tp., and 40.00 chs. of southing from the closing standard cor. of Tps. 10 and 11 S., R. 8 W.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T11S
R9W R8W

½
S6

1967

From this cor., the E. 1/4 sec. cor. of sec. 1, T. 11 S., R. 9 W., bears South, 18.35 chs. dist., monumented with an iron post, 1 in. diam., set and properly mkd. as described in the official record of the 1936 survey.

Pt. for the 80 1/16 sec. cor. of sec. 6, on the W. bdy. of the Tp. and 80.00 chs. of southing from the standard closing cor. of Tps. 10 and 11 S., R. 8 W.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T11S
R9W R8W

1/16
S6

80
1966

Survey of a Portion of the Subdivision, T. 11 S., R. 8 W.

CHAINS

From this cor., the cor. of secs. 6 and 7, on the W. bdy. of the Tp., bears South, 12.27 chs. dist., hereinbefore described.

General Description

Township 11 South, Range 8 West, is mostly gently rolling to nearly level desert land, except for the north tier of sections, which is mountainous. Vegetation in the township is mostly greasewood, shadscale and sagebrush, with scattered pinon and juniper in the north central and northeast portions of the township. The area is drained in easterly and westerly directions to an old river bed which drains north through the western portion of the township. There are several trail roads throughout the west and north portions of the township. There are two wells in the township. One in the SE $\frac{1}{4}$ SW $\frac{1}{4}$ section 28 and one in the NW $\frac{1}{4}$ SE $\frac{1}{4}$ section 18. No other water was noted in the township. The elevation of the township is about 4,500 ft. in the lower region to about 6,000 ft. above sea level in the mountains in the northern portion. Some of the land along the old river bed has been taken up by homestead, and at the present time about the only improvements are fences and the two wells hereinbefore mentioned. The soil ranges from clay in the southeast corner to sandy clay along the old river bed and gravel in the mountains and bench land in the northeast portion.

CERTIFICATE OF SURVEY

I, Glen B. Hatch, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 18th day of May, 19 65,

I have dependently resurveyed the South boundary and a portion of the subdivisional lines and surveyed a portion of the subdivisional lines of Township 11 South, Range 8 West

of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

(Date)

May 16, 1967

(Date)

(Cadastral Surveyor)

Glen B. Hatch

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

RECEIVED FOR APPROVAL

JAN 31 1968

BUREAU OF LAND MANAGEMENT, Washington, D. C.

The foregoing field notes of the dependent resurvey of the South boundary and a portion of the subdivisional lines and the survey of a portion of the subdivisional lines of Township 11 South, Range 8 West of the Salt Lake Meridian, in the State of Utah

executed by Glen B. Hatch, Supervisory Cadastral Surveyor having been critically examined and found correct, are hereby approved.

1968 (Date)

R. S. Brown
(Chief, Division of Engineering)

CERTIFICATE OF TRANSCRIPT

~~I CERTIFY that the foregoing transcript of the field notes of the above described surveys in is a true copy of the original field notes.~~

~~(Date)~~

~~(Chief, Division of Engineering)~~