Volume

#

R0584

BUREAU OF LAND MANAGEMENT

ORIGINAL

FIELD NOTES

OF THE

DEPENDENT RESURVEY

OF

THE NORTH BOUNDARY

AND

A PORTION OF THE FREMONT VALLEY GUIDE MERIDIAN (WEST BOUNDARY)

AND

A PORTION OF THE SUBDIVISIONAL LINES

OF

TOWNSHIP 27 SOUTH, RANGE 3 EAST

Of the SALT LAKE Meridian,

In the State of UTAH.

EXECUTED BY

CRAIG P. SYLVESTER SUPERVISORY CADASTRAL SURVEYOR

Under special instructions dated JUNE 2, 19 66, which provided for the surveys included under Group Number 489, approved JUNE 8, 1966, and assignment instructions dated SEPTEMBER 26, 19 66.

Survey commenced OCTOBER 17, 19 66

Survey completed JULY 6, 19 67

INDEX DIAGRAM

Township 27 SOUTH, Range 3 EAST,

10	9	8	7	6	5
4 6	68 5	56 4	45 3	34 2	23 1
67	66	55	44	34	22
3 7	65 8	54 9	43 10	32 11	20 12
65	64	53	42	32	20
2 18	63 17	52 16	41 15	30 14	18 13
62	61	52	40	29	18
19	60 20	51 21	39 22	28 23	16 24
	59	50	38	27	15
30	58 29	49 28	37 27	26 26	14 25
	57	48	37	25	13
31	32	47 33	36 34	24 35	11 36

GPO 849-505

CHAINS

The Fremont Valley Guide Meridian (West Boundary), and the west 4 miles of the South Boundary were surveyed by T. C. Bailey and J. G. Burrill in 1876. The east 2 miles of the South Boundary, the North Boundary, the East Boundary and 29 miles of the subdivisional lines were surveyed by Andrew P. Hanson in 1895. The East Boundary was resurveyed by Elliot Bird in 1933. The east 2 miles of the South Boundary were resurveyed by Elliot Bird in 1935. 31 miles of the subdivisional lines were surveyed by T. C. Bailey and J. G. Burrill in 1876. The south boundary of sections 33 and 34 was concurrently resurveyed by Craig P. Sylvester in 1966. A portion of the N. bdy. was remonumented by Andrew Nelson in 1961 under the Forest Service Remonumentation Program. The following field notes are those of the dependent resurvey of a portion of the Fremont Valley Guide Meridian (West Boundary), the North Boundary and a portion of the subdivisional lines of Township 27 South, Range 3 East.

The survey was conducted in accordance with the specifications as set forth in the Manual of Surveying Instructions 1947, and special instructions dated June 2, 1966.

Before restoring the corners the lines of the original survey were retraced and diligent search made for any evidence of the original corners, bearing trees or other calls of the original field note record.

The rules of proportionate distance were applied to ascertain the position of the lost corners, but not until exhausting every reasonable possibility of finding direct evidence for the control of each particular corner.

The lines of this survey were determined by reference to true meridians established on line by hour angle observations on Polaris and altitude observations on the sun. The lines were carried forward by sustained angulation being supplemented by other hour angle observations on Polaris taken throughout the progress of the survey.

The geographic position for the southeast corner of section 36, is at Latitude 38° 24' 42.29" N. and Longitude 111° 31' 23.71" W., as adjusted from section line ties to U.S.G.S. triangulation station "Red," at Latitude 38° 27' 40.959" N. and Longitude 111° 32' 17.299" W., located S. 70° 55' E., 15.42 chs. distance from the 1/4 section corner of sections 13 and 14.

The magnetic declination was read at several stations in the township and the average of these readings was found to be 16° East.

CHAINS

Dependent Resurvey of a Portion of the Fremont Valley Guide Meridian (West Boundary), Township 27 South, Range 3 East.

Reestablishment of the Survey Executed by T. C. Bailey and J. G. Burrill in 1876.

Beginning at the cor. of secs. 13, 18, 19 and 24, on the W. bdy. of the Tp., determined by a mound of stone and old lath and recent evidence of local survey work; it is in line with old fences to the south and accepted as the best available evidence of the position of the original cor.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 5 ft. base to top, with brass cap mkd.

T27S
R2E R3E

S13	S18
S24	S19

1966

Thence,

N. 0° 59' E., bet. secs. 13 and 18.

Over broken mountainous land through sagebrush undergrowth; asc. 360 ft. over rocky S. slope.

20.80 Ledgy rim, bears N. 45° E. and S. 45° W.; asc. 100 ft. over lava boulders on broken and ledgy S. slope.

40.16 The 1/4 sec. cor. of secs. 13 and 18, monumented with a lava stone, 18x14x8 ins., firmly set and plainly mkd. 1/4 on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T27S
R2E R3E

¼

S13	S18

1966

Bury original stone cor. in mound of stone alongside iron post.

CHAINS	
	N. 0° 29' E., beginning new measurement.
	Asc. 120 ft. over lava outcroppings on S. slope.
29.20	Leave outcroppings; asc. 30 ft. over gentle S. slope.
39.72	The cor. of secs. 7, 12, 13 and 18, monumented with a lava stone, 18x12x12 ins., in mound of stone.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd. T27S R2E R3E S12 | S7 S13 | S18 1966
	Bury original stone cor. in mound of stone alongside iron post.
	Land, mountainous and broken. Soil, rocky clay. Timber, widely scattered juniper and pinon. Undergrowth, shadscale and sagebrush.
	N. 0° 29' E., bet. secs. 7 and 12.
	Over gently rolling bench land through shadscale undergrowth; asc. 125 ft. over gentle S. slope.
40.29	The 1/4 sec. cor. of secs. 7 and 12, monumented with a lava stone, 12x8x4 ins., plainly mkd. 1/4 on W. face.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd. T27S R2E R3E ¼ S12 | S7 1966
	Bury original stone cor. in mound of stone alongside iron post.

CHAINS

N. 0° 30' E., beginning new measurement.

Asc. 140 ft. over gentle S. slope.

18.60 Trail road, bears N. 45° W. and S. 45° E.

40.24 The cor. of secs. 1, 6, 7 and 12, monumented with a lava stone, 24x14x12 ins., firmly set and plainly mkd. 5 notches on S. and 1 on N. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T27S
R2E R3E
S1 | S6
S12 | S7
1966

Bury original stone cor. in mound of stone alongside iron post.

Land, rolling bench land.
Soil, rocky loam.
No timber.
Undergrowth, shadscale.

N. 0° 41' E., bet. secs. 1 and 6.

Over bench land through shadscale undergrowth; asc. 125 ft. over gentle S. slope.

40.06 The 1/4 sec. cor. of secs. 1 and 6, monumented with a lava stone, 12x10x10 ins., plainly mkd. 1/4 on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 14 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T27S
R2E R3E
¼
S1 | S6
1966

Bury original stone cor. in mound of stone alongside iron post.

CHAINS

N. 2° 59' W., beginning new measurement.

Asc. 125 ft. over gentle S. slope.

40.09 The cor. of Tps. 26 and 27 S., Rs. 2 and 3 E., monumented with an iron post, 2½ ins. diam., 10 ins. above ground, and in a collar of stone, with brass cap mkd.

T26S
R2E R3E

S36	S31
S1	S6

T27S
1961

Land, rolling bench land.
Soil, rocky loam.
No timber.
Undergrowth, shadscale and sagebrush.

Dependent Resurvey of the N. Bdy., T. 27 S., R. 3 E.

Reestablishment of the Survey Executed by Andrew P. Hanson in 1895. Note: a portion of this bdy. was remonumented by Andrew Nelson in 1961 under the Forest Service Remonumentation Program.

From the cor. of Tps. 26 and 27 S., Rs. 3 and 4 E., monumented with an iron post, 3 ins. diam., 15 ins. above ground, and in a mound of stone, with brass cap mkd.

T26S
R3E R4E

S36	S31
S1	S6

T27S
1933

Thence,

N. 89° 55' W., bet. secs. 1 and 36.

Over mountain land through sagebrush undergrowth; desc. 90 ft. over gentle W. slope.

40.08 The 1/4 sec. cor. of secs. 1 and 36, monumented with an iron post, 2½ ins. diam., 6 ins. above ground, and mound of stone, 2 ft. base, 1½ ft. high, W. of cor., with brass cap mkd.

CHAINS

T26S R3E

¼ S36/S1

T27S

1961

N. 89° 59' W., beginning new measurement.

Desc. 25 ft. over gentle W. slope.

6.95 State Highway No. 72, Fremont to Emery, bears irregularly N. and S.

16.00 Base of small hill, bears N. and S.; asc. 40 ft. over gentle E. slope.

28.30 Low hill, bears N. and S.; desc. 65 ft. over W. slope.

40.18 The cor. of secs. 1, 2, 35 and 36, monumented with an iron post, 6 ins. above ground, at cor. of fences bearing S. and W., with brass cap mkd.

T26S R3E

S35	S36
S2	S1

T27S

1961

Land, mountainous.
Soil, rocky loam.
No timber.
Undergrowth, sagebrush.

N. 89° 43' W., bet. secs. 2 and 35.

Over mountain land through sagebrush undergrowth and along N. side of fence line; asc. 130 ft. over E. slope.

28.20 Hill, bears N. and S.; desc. 95 ft. over W. slope.

40.02 The 1/4 sec. cor. of secs. 2 and 35, monumented with a lava stone, 18x14x6 ins., plainly mkd. 1/4.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

CHAINS	
	T26S R3E ¼ S35/S2 T27S R3E 1966 Bury original stone cor. in mound of stone alongside iron post. Cor. is 39 lks. N. of E. and W. fence line.
	S. 89° 54' W., beginning new measurement. Desc. 95 ft. over gentle W. slope. Continue along N. side of fence line.
39.96	The cor. of secs. 2, 3, 34 and 35, monumented with an iron post, 2½ ins. diam., 6 ins. above ground, with mound of stone to N. and brass cap mkd. T26S R3E S34|S35 S3|S2 T27S 1961 Cor. is located 8 lks. S. of E. and W. fence line. Land, mountainous. Soil, rocky loam. No timber. Undergrowth, shadscale and sagebrush.
	N. 89° 54' W., bet. secs. 3 and 34. Over mountain land through sagebrush undergrowth; desc. 255 ft. over steep W. slope.
12.00	Gravel road, bears irregularly N. and S. to Fremont; desc. 80 ft. over gentle W. slope.
20.20	Mean high water line on E. bank of Mill Mountain Reservoir, bears N. and S.; thence by triangulation.
33.20	Mean high water line on W. bank of reservoir, bears N. and S.; asc. about 160 ft. over E. slope.
39.97	The 1/4 sec. cor. of secs. 3 and 34, monumented with a lava stone, 18x12x12 ins., plainly mkd. 1/4 on N. face.

CHAINS	
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.
	T26S R3E ¼ S34/S3 T27S R3E 1966
	Bury original stone cor. in mound of stone alongside iron post.
	Cor. is located on spur, slopes S. and 51 lks. N. of E. and W. fence line.
	N. 89° 57' W., beginning new measurement.
	Desc. 55 ft. over W. slope along N. side of fence line.
2.70	Draw, drains S.; asc. 110 ft. over E. slope.
25.70	Top of ascent, slopes S.; desc. 35 ft. over SW. slope.
30.90	Head of draw, drains S.; asc. 65 ft. over SE. slope.
39.20	Low ridge, bears N. and S.; desc. 5 ft. over W. slope.
40.20	The cor. of secs. 3, 4, 33 and 34, monumented with an iron post, 2½ ins. diam., 12 ins. above ground, and in a mound of stone, with brass cap mkd.
	T26S R3E S33|S34 S4|S3 T27S 1961
	Cor. located on N. side of E. and W. fence line.
	Land, mountainous. Soil, rocky loam. No timber. Undergrowth, sagebrush and shadscale.
	S. 89° 37' W., bet. secs. 4 and 33.
	Over mountain land through sagebrush undergrowth; desc. 100 ft. over rocky W. slope along fence line.
8.20	Draw, drains S.; asc. 80 ft. along N. slope.
33.80	Top of ascent, slopes N.; desc. 15 ft. over NW. slope.

CHAINS	
39.00	Small wash, drains N. 50° E. from S.
40.08	The 1/4 sec. cor. of secs. 4 and 33, monumented with an iron post, 2½ ins. diam., 6 ins. above ground, with brass cap mkd. T26S R3E ¼ S33/S4 T27S 1961 Cor. is located 1 lk. N. of E. and W. fence line.
	N. 89° 59' W., beginning new measurement.
	Asc. 95 ft. along general N. slope along fence line.
15.50	Spur, slopes N.; desc. 55 ft. over NW. slope.
24.60	Draw, drains N. about 4.00 chs.; thence E.; asc. 60 ft. over NE. slope.
40.42	The cor. of secs. 4, 5, 32 and 33, monumented with an iron post, 2½ ins. diam., 16 ins. above ground and in a mound of stone, with brass cap mkd. T26S R3E S32 | S33 S5 | S4 T27S 1961 Cor. is located 1 lk. N. of E. and W. fence line. Land, mountainous. Soil, rocky loam. No timber. Undergrowth, sagebrush.
	N. 89° 56' W., bet. secs. 5 and 32.
	Over mountain land through sagebrush undergrowth; asc. 50 ft. over NE. slope along fence line.
17.05	Spur, slopes N.; thence along N. slope.
36.00	Trail road, bears N. 80° W. and S. 80° E.
40.05	The 1/4 sec. cor. of secs. 5 and 32, monumented with an iron post, 2½ ins. diam., 10 ins. above ground, and in a collar of stone, with mound of stone, 2 ft. base, 1½ ft. high, N. of cor., with brass cap mkd.

CHAINS

T26S R3E

¼ S32 / S5

T27S

1961

Cor. is located 7 lks. S. of E. and W. fence line.

N. 89° 36' W., beginning new measurement.

Asc. 60 ft. along N. slope and along fence line.

6.90 Spur, slopes N. about 4.00 chs. to end; desc. 30 ft. along N. slope.

30.90 Trail road, bears N. and S.; asc. 185 ft. over rocky E. slope.

40.02 The cor. of secs. 5, 6, 31 and 32, monumented with a mound of stone; it fits the calls of the original field note record and I accept this as the best available evidence of the position of the original cor.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., on solid rock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T26S R3E

S31	S32
S6	S5

T27S R3E

1966

Cor. located on E. and W. fence line at head of small draw, drains S.

Land, mountainous.
Soil, rocky loam.
No timber.
Undergrowth, sagebrush.

N. 89° 47' W., bet. secs. 6 and 31.

Over mountainous land through scattered timber; desc. 110 ft. over broken W. slope along fence line.

13.85 Top of rocky knob; desc. 145 ft. over ledgy W. slope.

20.95 Draw, drains S.; asc. 235 ft. over ledgy E. slope.

31.85 Rim of draw, bears N. and S.; asc. 20 ft. over gentle E. slope.

37.00 Leave timber.

CHAINS

39.94 The 1/4 sec. cor. of secs. 6 and 31, monumented with an iron post, 1 in. diam., 24 ins. above ground and in a mound of stone, with brass cap mkd.

T26S R3E
¼ S31/S6
T27S
1961

Cor. is located in E. and W. fence line.

S. 89° 25' W., beginning new measurement.

Over gently rolling mountain bench land along fence line.

35.73 The cor. of Tps. 26 and 27 S., Rs. 2 and 3 E., hereinbefore described.

Land, mountainous.
Soil, rocky loam.
Timber, scattered mahogany E. portion.
Undergrowth, sagebrush.

Dependent Resurvey of a Portion of the Subdivision, T. 27 S., R. 3 E.

Reestablishment of the Survey Executed by Andrew P. Hanson in 1895.

From the cor. of secs. 35 and 36, on the S. bdy. of the Tp., monumented with an iron post, 2 ins. diam., 12 ins. above ground and in a mound of stone, with brass cap mkd.

T27S R3E
S35|S36
T28S R3E
S1
1935

Thence,

N. 0° 03' E., bet. secs. 35 and 36.

Over mountainous land through dense timber. By triangulation; desc. about 80 ft. over N. slope.

CHAINS	
3.50	Draw, drains W.; thence along W. slope.
16.50	Cedar Creek, drains W.; asc. about 120 ft. along W. slope.
34.55	Spur, slopes W. End triangulation; desc. 25 ft. over N. slope.
38.35	Draw, drains W.; asc. 15 ft. over SW. slope.
39.94	The 1/4 sec. cor. of secs. 35 and 36, monumented with a lava stone, 18x12x7 ins., firmly set and plainly mkd. 1/4 on W. face. From which the original bearing trees A pinon, 15 ins. diam., bears N. 74° 30' W., 43 lks. dist., mkd. 1/4 S BT. A pinon, 24 ins. diam., bears S. 70° 15' E., 42 lks. dist., mkd. 1/4 S BT. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, with brass cap mkd. T27S R3E ¼ S35|S36 1967 Bury original stone cor. alongside iron post. Raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor. --- N. 0° 37' E., beginning new measurement. Asc. 15 ft. over SW. slope.
3.20	Spur, slopes W.; thence by triangulation; desc. about 40 ft. along W. slope.
16.00	Draw, drains W.; asc. about 20 ft. over SW. slope.
22.00	Spur, slopes N. 70° W.; desc. about 200 ft. over NW. slope.
30.00	Draw, drains N. 45° W.; thence along W. slope.
39.80	The cor. of secs. 25, 26, 35 and 36, monumented with a lava stone, 18x10x7 ins., firmly set and plainly mkd. 1 notch on S. and E. edges. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

CHAINS

T27S R3E

S26	S25
S35	S36

1967

Bury original stone cor. alongside iron post.

Cor. located 5 lks. E. of fences bearing N. and W.

Land, mountainous.
Soil, rocky clay.
Timber, dense pinon, juniper and fir.
Undergrowth, sagebrush.

From the cor. of secs. 25 and 36, on the E. bdy. of the Tp., monumented with an iron post, 2 ins. diam., 9 ins. above ground, with brass cap mkd.

T27S	T27S
S25	
	R4E
S36	
R3E	S30

1933

From which the original bearing trees

A spruce, 18 ins. diam., bears S. 2° 30' W., 25 lks. dist., mkd. T27S R3E S36 BT.

A spruce, 12 ins. diam., bears N. 13° 30' W., 32 lks. dist., mkd. T27S R3E S25 BT.

Thence,

N. 89° 18' W., bet. secs. 25 and 36.

Over mountainous land through dense timber. By triangulation; desc. about 520 ft. over broken and steep W. slope.

30.00 Draw, drains N. 30° W.; asc. about 40 ft. over NE. slope.

35.00 Spur, slopes N. 50° W.; desc. about 50 ft. over W. slope. End triangulation.

39.40 Point for the 1/4 sec. cor. of secs. 25 and 36 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T27S R3E

¼ S25
S36

1967

CHAINS

Thence by triangulation; desc. about 600 ft. over W. changing to SW. slope.

62.00 Draw, drains N. 45° W.; asc. about 80 ft. over NE. slope.

67.00 Spur, slopes N. 50° W.; desc. about 320 ft. over SW. slope.

78.80 The cor. of secs. 25, 26, 35 and 36.

Land, mountainous and broken.
Soil, rocky clay.
Timber, dense pinon, juniper and fir.
Undergrowth, sabebrush.

N. 0° 17' W., bet. secs. 25 and 26.

Over broken mountainous land through dense timber; asc. 80 ft. over SW. slope along fence line.

10.95 Spur, slopes N. 45° W.; thence by triangulation; desc. about 120 ft. along broken W. slope.

15.50 Draw, drains N. 50° W.

26.00 Draw, drains N. 60° W.

32.50 Draw, drains W.

40.25 The 1/4 sec. cor. of secs. 25 and 26, monumented with a lava stone, 18x12x11 ins., firmly set and plainly mkd. 1/4 on W. face. End triangulation.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 14 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T27S R3E
¼
S26 | S25
1967

Bury original stone cor. alongside iron post.

Cor. is located 6 lks. W. of N. and S. fence line.

N. 0° 03' E., beginning new measurement.

By triantulation, continue along W. slope along fence line.

3.00 Spur, slopes N. 45° W.; desc. about 40 ft. over NW. slope.

8.00 Draw, drains N. 70° W.; desc. about 120 ft. over NW. slope.

Dependent Resurvey of a Portion of the
Subdivision, T. 27 S., R. 3 E.

CHAINS	
35.00	Draw, drains W.; asc. about 20 ft. over SW. slope.
40.26	The cor. of secs. 23, 24, 25 and 26, monumented with a sandstone, 13x4x4 ins., firmly set and plainly mkd. 2 notches on S. and 1 on E. edges, and witnessed by a mound of stone to W. End triangulation. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T27S R3E S23 | S24 S26 | S25 1967 Bury original stone cor. alongside iron post. Rebuild mound of stone, 3 ft. base, 2 ft. high, W. of cor. Land, broken and mountainous. Soil, rocky loam. Timber, pinon, juniper and fir. Undergrowth, sagebrush.
	From the cor. of secs. 24 and 25, on the E. bdy. of the Tp., monumented with an iron post, 2 ins. diam., 12 ins. above ground and in a mound of stone, with brass cap mkd. T27S | T27S S24 | R4E S25 | R3E S19 1933 Thence, N. 89° 48' W., bet. secs. 24 and 25. Over mountainous land through dense timber; desc. 280 ft. over NW. slope.
2.85	Trail road, bears N. 10° W. and S. 10° E.
5.00	Trail road, bears N. 25° W. and S. 25° E.
12.00	Draw, drains S. 70° W.; desc. 200 ft. over SW. slope.
19.00	Same draw, drains N. 75° W., curving W.; desc. 320 ft. along N. slope; enter dense juniper and pinon timber.
34.00	Spur, slopes W.; desc. 120 ft. over W. slope along spur.
39.16	The 1/4 sec. cor. of secs. 24 and 25, monumented with a lava stone, 18x10x9 ins., firmly set and plainly mkd. 1/4 on N. face, and witnessed by a small mound of stone to N.

CHAINS

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T27S R3E

¼ S24/S25

1967

Bury original stone cor. in mound of stone alongside iron post.

N. 89° 14' W., beginning new measurement.

By triangulation; desc. about 320 ft. over SW. slope.

17.00 Draw, drains N. 65° W.; desc. about 160 ft. over NW. slope.

40.26 The cor. of secs. 23, 24, 25 and 26. End triangulation.

Land, broken and mountainous.
Soil, rocky loam.
Timber, dense pinon, juniper, scattered aspen and fir.
Undergrowth, sagebrush.

N. 0° 02' E., bet. secs. 23 and 24.

Over rolling mountain land through pinon and juniper timber, by triangulation; desc. about 40 ft. over NW. slope, along fence line.

1.90 Old stream bed, drains W.

3.60 Concrete ditch, 6 lks. wide, 15 ins. deep, flows S. 80° W.; asc. about 120 ft. over SW. slope.

4.00 Trail road, bears N. 80° E. and S. 80° W.

40.01 The 1/4 sec. cor. of secs. 23 and 24, monumented with a trachyte stone, 18x10x9 ins., firmly set and plainly mkd. 1/4, and witnessed by a mound of stone to W. End triangulation.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 16 ins. in the ground, and in a collar of stone, with brass cap mkd.

T27S R3E

¼

S23|S24

1967

CHAINS	
	Bury original stone cor. alongside iron post. Rebuild mound of stone, 3 ft. base, 2 ft. high, W. of cor. Cor. is 3 lks. W. of N. and S. Fence line.
	N. 0° 01' W., beginning new measurement. By triangulation; asc. about 40 ft. over SW. slope, continue along fence line.
16.00	Draw, drains W.; asc. about 120 ft. over SW. slope.
30.40	Spur, slopes W. End triangulation; thence along W. slope.
35.30	Head of draw, drains W.; asc. 35 ft. over SW. slope.
39.88	The cor. of secs. 13, 14, 23 and 24, monumented with a lava stone, 16x12x8 ins., firmly set and plainly mkd. 1/4 on W. face, and witnessed by a mound of stone to W. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground, and in a collar of stone, with brass cap mkd. T27S R3E S14 | S13 S23 | S24 1967 Bury original stone cor. alongside iron post. Rebuild mound of stone, 3 ft. base, 2 ft. high, W. of cor. Land, rolling mountain. Soil, rocky gravel. Timber, juniper and pinon. Undergrowth, sagebrush.
	From the cor. of secs. 13 and 24, on the E. bdy. of the Tp., monumented with an iron post, 2 ins. diam., 10 ins. above ground, with brass cap mkd. T27S T27S S13 | R4E S24 | S18 R3E 1933

CHAINS	
	Thence,
	S. 89° 44' W., bet. secs. 13 and 24.
	Over mountainous land through pinon and juniper timber. By triangulation; desc. 560 ft. over broken W. slope.
39.98	The 1/4 sec. cor. of secs. 13 and 24, monumented with a lava stone, 18x12x8 ins., firmly set and plainly mkd. 1/4 on N. face. End triangulation.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground to bedrock, and in a mound of stone, 3½ ft. base to top, with brass cap mkd.
	T27S R3E ¼ S13/S24 1967
	Bury original stone cor. in mound of stone alongside iron post.
	S. 89° 51' W., beginning new measurement.
	By triangulation; desc. about 320 ft. over SW. slope.
40.15	The cor. of secs. 13, 14, 23 and 24. End triangulation.
	Land, broken and mountainous. Soil, rocky gravel. Timber, pinon and juniper. Undergrowth, sagebrush.
	N. 0° 27' W., bet. secs. 13 and 14.
	Over mountainous land through pinon and juniper timber; asc. 160 ft. over broken SW. slope along fence line.
10.00	Small draw, drains S. 45° W.
18.90	Draw, drains W. 1.00 ch.; thence S. 45° W.
27.60	Spur, slopes S. 45° W.; desc. 45 ft. over NW. slope.
40.05	The 1/4 sec. cor. of secs. 13 and 14, monumented with a lava stone, 18x10x7 ins., firmly set and plainly mkd. 1/4 on W. face.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground, and in a mound of stone, 3 ft. base to top with brass cap mkd.

Dependent Resurvey of a Portion of the
Subdivision, T. 27 S., R. 3 E.

CHAINS	
	T27S R3E ¼ S14 | S13 1967 Bury original stone cor. alongside iron post. Cor. located 13 lks. W. of N. and S. fence line. From this cor., U.S.G.S. triangulation station "Red," bears S. 70° 55' E., 15.42 chs. dist.
	N. 0° 09' E., beginning new measurement.
	Asc. 10 ft. along W. slope along fence line.
14.00	Spur, slopes S. 45° W.; desc. 50 ft. over NW. slope.
24.00	Small draw, drains W.
25.15	Spur, slopes S. 65° W.; desc. 85 ft. over NW. slope.
39.90	The cor. of secs. 11, 12, 13 and 14, monumented with a lava stone, 16x9x7 ins., firmly set and plainly mkd. 4 notches on S. and 1 on E. edges. From which the original bearing trees: A pinon, 9 ins. diam., bears N. 28° 40' W., 41 lks. dist., mkd. T27S R3E S11 BT. A pinon, 10 ins. diam., bears N. 63° 30' E., 125 lks. dist., mkd. T27S R3E S12 BT. A pinon, 8 ins. diam., bears S. 54° 15' E., 34 lks. dist., mkd. T27S R3E S13 BT. A pinon 9 ins. diam., bears S. 83° 45' W., 94 lks. dist., mkd. T27S R3E S14 BT. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T27S R3E S11 | S12 S14 | S13 1967 Bury original stone cor. alongside iron post. Cor. is located in N. and S. fence line. Land, mountainous and broken. Soil, rocky gravel. Timber, scattered pinon and juniper. Undergrowth, sagebrush.

CHAINS

From the cor. of secs. 12 and 13, on the E. bdy. of the Tp., monumented with an iron post, 2 ins. diam., 10 ins. above ground, with brass cap mkd.

T27S	T27S
S12 / S13	R4E
R3E	S7

1933

Thence,

N. 89° 57' W., bet. secs. 12 and 13.

Over mountainous land through pinon and juniper timber. By triangulation; desc. 280 ft. over NW. slope.

24.50 Red Canyon, drains N. 65° W.; thence along N. slope.

40.21 Point for the 1/4 sec. cor. of secs. 12 and 13 at proportionate dist.; there is no remaining evidence of the original cor. End triangulation.

Set an iron post, 30 ins. long, 2½ ins. diam., 14 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T27S R3E

¼ S12 / S13

1967

40.55 Small wash, drains N. 70° W.; asc. 15 ft. over NE. slope.

50.60 Spur, slopes N. 50° W.; thence by triangulation; desc. about 160 ft. over NW. slope.

80.42 The cor. of secs. 11, 12, 13 and 14. End triangulation.

Land, mountainous and broken.
Soil, rocky gravel.
Timber, pinon and juniper.
Undergrowth, sagebrush.

N. 0° 02' E., bet. secs. 11 and 12.

Over mountainous land through pinon and juniper timber; desc. 140 ft. over broken NW. slope along fence line.

11.05 Trail road, bears N. 60° E. and S. 60° W.

13.15 Wash, 20 lks. wide, 10 ft. deep, drains S. 60° W.

18.80 Wash, 20 lks. wide, 8 ft. deep, drains W.

22.00 Wash, 20 lks. wide, 15 ft. deep, drains W. 2.00 chs.; thence N. 45° W.

CHAINS	
30.00	Wash, 30 lks. wide, 6 ft. deep, drains W.
31.90	Trail road, bears irregularly E. and W.
37.40	End of N. and S. fence line.
37.55	Red Canyon, 1.00 ch. wide, 15 ft. deep, drains S. 60° W. A small stock pond, bears N. 60° E., 8.00 chs. dist.
39.70	The 1/4 sec. cor. of secs. 11 and 12, monumented with a lava boulder in place, 3x3x1½ ft., mkd. 1/4 on E. face.
	From which the original bearing trees
	A juniper, 14 ins. diam., bears N. 21° E., 28 lks. dist., mkd. 1/4 S BT. (Record: N. 27° E., 23 lks.)
	A pinon, 8 ins. diam., bears N. 60° W., 23 lks. dist., mkd. 1/4 S BT. (Record: N. 59° 30' W., 38 lks.)
	Along E. side of rock.
	Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.
	T27S R3E ¼ S11 | S12 1967
	N. 0° 03' E., beginning new measurement.
	Asc. 30 ft. over steep S. slope.
0.80	Spur, slopes E. from N., also, beginning of fence, bears N.; thence asc. 85 ft. along E. slope along fence line.
27.55	Trail road, bears N. 30° E. and S. 30° W.
40.20	The cor. of secs. 1, 2, 11 and 12, monumented with a lava stone, 24x10x9 ins., firmly set and plainly mkd. 5 notches on S. and 1 on E. edges.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.
	T27S R3E S2 | S1 S11 | S12 1967
	Bury original stone cor. in mound of stone, alongside iron post.

CHAINS

Cor. is located 5 lks. W. of N. and S. fence line.

Land, mountainous.
Soil, rocky loam.
Timber, pinon and juniper.
Undergrowth, sagebrush.

From the cor. of secs. 1 and 12, on the E. bdy. of the Tp., monumented with an iron post, 2 ins. diam., 18 ins. above ground and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T27S T27S
S1 | R4E
S12 |
R3E | S6
1933

Thence,

S. 89° 40' W., bet. secs. 1 and 12.

Over mountainous land through medium dense timber; desc. 105 ft. over NW. slope.

15.55 Leave timber, bears N. 45° E. and S. 45° W., enter sagebrush.

16.55 Mormon Fork Canyon, with stream of water, 2 lks. wide, 4 ins. deep, flows S. 45° W.; desc. 80 ft. over SW. slope.

19.80 Wash, 5 lks. wide, 1 ft. deep, drains S. 60° W.

32.30 Enter timber, bears N. 30° E. and S. 30° W.

39.30 Trail road, bears N. 45° W. and S. 45° W., 3.00 chs.; thence S. 45° E.

40.82 The 1/4 sec. cor. of secs. 1 and 12, monumented with a lava stone, 18x10x9 ins., firmly set and plainly mkd. 1/4 on N. face, and witnessed by a mound of stone to N.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 16 ins. in the ground, and in a mound of stone, 3½ ft. base to top, with brass cap mkd.

T27S R3E
¼ S1
S12
1967

Bury original stone cor. alongside iron post.

Rebuild mound of stone, 3 ft. base, 2 ft. high, N. of cor.

CHAINS	
	N. 89° 47' W., beginning new measurement.
	Asc. 15 ft. along S. slope.
0.10	Trail road, bears irregularly N. and S.
1.65	Base of knoll; asc. 50 ft. over SE. slope.
4.00	Top of ascent; desc. 50 ft. over SW. slope.
8.35	Base of knoll; asc. 25 ft. along general S. slope.
26.60	Trail road, bears N. 30° E. and S. 30° W.
39.92	Fence, bears N. and S.
39.97	The cor. of secs. 1, 2, 11 and 12.
	Land, mountainous. Soil, rocky loam. Timber, pinon and juniper. Undergrowth, sagebrush.
	N. 0° 18' E., bet. secs. 1 and 2.
	Over rolling mountain land through scattered timber; asc. 5 ft. over S. slope.
2.00	Low saddle, on spur, bears E. and W.; desc. 170 ft. over broken NE. slope.
19.35	Draw, drains N. 45° W.; asc. 10 ft. over SW. slope.
22.35	Spur, slopes N. 45° W.; desc. 15 ft. over NW. slope.
23.15	Base of descent, bears N. 45° E. and S. 45° W.; thence over nearly level land.
35.35	State Highway No. 72, bears irregularly N. 40° E. and S. 40° W.
38.20	Wash, 5 lks. wide, 3 ft. deep, drains W.
39.65	Wash, 5 lks. wide, 2 ft. deep, drains W. 50 lks.; thence N. 45° W.
40.30	The 1/4 sec. cor. of secs. 1 and 2, monumented with a lava stone, 12x8x4 ins., firmly set in a mound of stone, and plainly mkd. 1/4 on W. face. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T27S R3E ¼ S2|S1 1967

Dependent Resurvey of a Portion of the Subdivision, T. 27 S., R. 3 E.

CHAINS

Bury original stone cor. alongside iron post.

Raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor.

Cor. located 9.1ks. E. of N. and S. fence line.

N. 0° 11' W., beginning new measurement.

Continue along fence line.

5.80 Pole Canyon, 150 lks. wide, 20 ft. deep, drains W.; asc. 85 ft. over S. slope.

10.30 Spur, slopes W. from N. 30° E.; asc. 10 ft. over gentle SW. slope.

18.00 Slope changes; thence along W. slope.

40.23 The cor. of secs. 1, 2, 35 and 36, on the N. bdy. of the Tp., hereinbefore described.

Land, mountainous.
Soil, rocky loam.
Timber, scattered pinon.
Undergrowth, sagebrush.

Reestablishment of the Survey Executed by J. G. Burrill and T. C. Bailey in 1876.

From the cor. of secs. 2, 3, 34 and 35, on the S. bdy. of the Tp., monumented with an iron post, 2 ins. diam., 18 ins. above ground and in a mound of stone, with brass cap mkd.

T27S R3E

S34	S35
S3	S2

T28S

1935

Thence,

N. 0° 28' W., bet. secs. 34 and 35.

Over mountainous land through scattered timber; desc. 115 ft. along general W. slope.

32.95 Wash, drains N. 80° W.; desc. 10 ft. over NW. slope through dense timber.

40.07 Point for the 1/4 sec. cor. of secs. 34 and 35 at proportionate dist.; there is no remaining evidence of the original cor.

CHAINS	
	Set an iron post, 30 ins. long, 2½ ins. diam., 15 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd. T27S R3E ¼ S34 | S35 1966
40.18	Fence, bears E. and W.
40.30	Wash, drains W. from S. 45° E.; desc. 125 ft. over NW. slope.
65.25	Road, bears W. and E., 5.00 chs. to ranch.
65.83	Fence, bears W. and E., 5.00 chs. to ranch yards; thence over farm land.
72.49	Point selected for the witness cor. of secs. 26, 27, 34 and 35, on fence line, bears E. and W. Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd. T27S R3E W C S27 | S26 S34 | S35 1967
80.14	Point for the cor. of secs. 26, 27, 34 and 35 at proportionate dist., falls in cultivated land and is not monumented. There is no remaining evidence of the original cor. Land, mountainous S. portion; farm N. portion. Soil, rocky loam. Timber, pinon and juniper S. portion. Undergrowth, sagebrush S. portion.

Reestablishment of the Survey Executed
by Andrew P. Hanson in 1895.

From the cor. of secs. 25, 26, 35 and 36.

N. 89° 41' W., bet. secs. 26 and 35.

Over mountainous land through dense timber; desc. 200 ft. over W. slope.

0.05	Fence, bears N. and W.; thence along fence line.
10.50	Draw, drains N. 50° W.; desc. 40 ft. over NW. slope.

CHAINS	
16.00	Spur, slopes N. 60° W.; desc. 200 ft. over NW. slope.
40.28	The 1/4 sec. cor. of secs. 26 and 35, monumented with a lava stone, 18x10x6 ins., firmly set and plainly mkd. 1/4 on N. face. From which the original bearing tree A pinon, 14 ins. diam., bears N. 45° E., 71 lks. dist., mkd. 1/4 S BT. (Record: N. 44° 20' E., 12 lks.) No trace of other bearing tree. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 14 ins. in the ground, and in a collar of stone, with brass cap mkd. T27S R3E ¼ S26/S35 1966 Bury original stone cor. alongside iron post. Cor. is located 6 lks. S. of fence, bears E. and S. --- N. 88° 41' W., beginning new measurement. Desc. 80 ft. over W. slope.
2.10	Draw, drains W., from S. 85° E.
15.50	Fence, bears N. 45° E. and S. 45° W., enter farm land.
41.17	True point for the cor. of secs. 26, 27, 34 and 35. Land, mountainous E. portion; farm W. portion. Soil, gravelly. Timber, pinon and juniper E. portion. Undergrowth, sagebrush.
	Reestablishment of the Survey Executed by J. G. Burrill and T. C. Bailey in 1876. --- N. 0° 12' E., bet. secs. 26 and 27. Over nearly level farm land.
40.07	Point for the 1/4 sec. cor. of secs. 26 and 27 at proportionate dist.; there is no remaining evidence of the original cor.

CHAINS	
	Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 5 ft. base to top, with brass cap mkd. T27S R3E ¼ S27|S26 1967 Cor. located on small rocky knoll in farm land. Continue over nearly level farm land.
80.14	Point for the cor. of secs. 22, 23, 26 and 27 at proportionate dist.; there is no remaining evidence of the original cor. Point falls in farm land. Bury four brown bottles 12 ins. below ground. Land, nearly level farm. Soil, gravelly. No timber. No undergrowth.
	Reestablishment of the Survey Executed by Andrew P. Hanson in 1895. --- From the cor. of secs. 23, 24, 25 and 26. N. 89° 37' W., bet. secs. 23 and 26. Over rolling land through pinon timber; desc. 160 ft. over gentle W. slope.
18.94	Fence, bears N. and S., enter farm land.
41.14	Point for the 1/4 sec. cor. of secs. 23 and 26 at proportionate dist., falls in cultivated land; there is no remaining evidence of the original cor. Bury 5 brown bottles 20 ins. below ground. Continue over cultivated land.
43.79	Point selected for the witness 1/4 sec. cor. of secs. 23 and 26. Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground, and in a collar of stone, with brass cap mkd. T27S R3E ¼ S23 → W S26 C 1967
80.90	The cor. of secs. 22, 23, 26 and 27.

CHAINS	
	Land, rolling E. portion; farm W. portion. Soil, gravelly. Timber, pinon; E. portion. Undergrowth, sagebrush, E. portion.
	Reestablishment of the Survey Executed by J. G. Burrill and T. C. Bailey in 1876.
	N. 1° 22' W., bet. secs. 22 and 23.
	Over nearly level farm land.
2.00	Leave farm land, bears E. and W., enter sagebrush.
17.20	Fence, bears E. and W.
17.75	Wash, 10 lks. wide, 4 ft. deep, drains W.
19.35	Wash, 15 lks. wide, 3 ft. deep, drains W.
23.05	Improved dirt road, bears E. and W., about 10.00 chs.; thence N. 45° W.
24.60	Wash, drains S. 45° W.; asc. 50 ft. over S. slope. Enter scattered timber.
40.08	The 1/4 sec. cor. of secs. 22 and 23, monumented with a trachyte stone, 14x11x7 ins., firmly set in a mound of stone, and plainly mkd. 1/4.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.
	T27S R3E ¼ S22|S23 1967
	Bury original stone cor. alongside iron post.
	N. 0° 47' E., beginning new measurement.
	Asc. 45 ft. over rocky S. slope.
8.50	Ridge, bears E. and W.; desc. 120 ft. over N. slope.
18.80	Draw, drains N. 70° W.; asc. 20 ft. over SW. slope.
20.00	Low spur, slopes N. 70° W.; desc. 15 ft. over NE. slope.
21.50	Small draw, drains S. 70° W.; asc. 30 ft. over S. slope.

CHAINS	
25.50	Spur, slopes S. 60° W.; desc. 10 ft. over NW. slope.
27.00	Small draw, drains S. 60° W. from N. 20° E.; asc. 80 ft. over S. slope.
39.21	The cor. of secs. 14, 15, 22 and 23, monumented with a lava stone, 12x12x8 ins., firmly set and plainly mkd. 3 notches on S. and 2 on E. edges. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd. T27S R3E S15 | S14 S22 | S23 1967 Bury original stone cor. alongside iron post. Land, rolling S. portion; mountainous N. portion. Soil, gravelly. Timber, pinon and juniper N. portion. Undergrowth, sagebrush.

Reestablishment of the Survey Executed
by Andrew P. Hanson in 1895.

	From the cor. of secs. 13, 14, 23 and 24. S. 89° 43' W., bet. secs. 14 and 23. Over mountainous land through pinon and juniper timber; desc. 55 ft. over SW. slope.
6.80	Draw, drains S. 40° W.; asc. 10 ft. over SE. slope.
11.05	Spur, slopes S.; desc. 155 ft. over SW. slope.
15.30	Enter sagebrush flat.
36.70	Trail road, bears N. and S.
40.80	Point for the 1/4 sec. cor. of secs. 14 and 23 at proportionate bearing and distance; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T27S R3E ¼ — S14 S23 1967 Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.

CHAINS	
	S. 89° 48' W., beginning new measurement.
	Desc. 60 ft. over SW. slope.
0.85	Leave sagebrush flat, enter dense timber.
12.30	Draw, drains W. from N. 20° E.; desc. 35 ft. along draw.
22.00	Draw, drains S. 50° W.; asc. 10 ft. over SE. slope.
28.00	Spur, slopes S.; desc. 85 ft. over SW. slope.
40.54	The cor. of secs. 14, 15, 22 and 23.
	Land, mountainous. Soil, rocky gravel. Timber, pinon and juniper. Undergrowth, sagebrush.

Reestablishment of the Survey Executed by
J. G. Burrill and T. C. Bailey in 1876.

	N. 0° 31' W., bet. secs. 14 and 15.
	Over mountainous land through pinon and juniper timber; asc. 60 ft. over SW. slope.
6.70	Head of draw, drains W., continue ascent.
9.85	Spur, slopes S. 45° W.; thence by triangulation; desc. about 160 ft. over N. slope.
18.00	Draw, drains N. 45° W.; thence along W. slope.
29.00	Head of draw, drains S. 45° W.; asc. about 120 ft. over SW. slope.
36.00	Spur, slopes N. 50° W.; desc. about 40 ft. over NW. slope.
39.00	Small draw, drains S. 45° W.
39.80	Trail road, bears E. and W.
39.86	The 1/4 sec. cor. of secs. 14 and 15, monumented with a lava stone, 14x8x5 ins., firmly set and plainly mkd. 1/4 on W. face, in a mound of stone. End triangulation.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T27S R3E
¼
S15|S14
1967

CHAINS	
	Bury original stone cor. alongside iron post.
	Reestablishment of the Survey Executed by Andrew P. Hanson in 1895.
	N. 2° 13' E., beginning new measurement.
	By triangulation; asc. about 60 ft. over S. slope.
2.50	Spur, slopes S. 60° W.; desc. about 40 ft. along W. slope.
7.00	Head of draw, drains W.; asc. about 120 ft. over steep S. slope.
20.00	Ridge, bears E. and W.; end triangulation; desc. 145 ft. over NE. slope.
31.50	Hector Hollow, with trail road in bottom, drains N. 45° W.; asc. 105 ft. over SW. slope.
40.49	The cor. of secs. 10, 11, 14 and 15, monumented with a lava stone, 24x14x10 ins., firmly set and plainly mkd. 4 notches on S. and 2 on E. edges.
	From which the original bearing trees
	A dead and fallen pinon, 10 ins. diam., bears S. 39° 30' W., 53 lks. dist., mkd. T27S R3E S15 BT.
	A pinon, 8 ins. diam., bears N. 86° W., 35 lks. dist., mkd. T27S R3E S10 BT.
	A pinon, 10 ins. diam., bears N. 62° 30' E., 31 lks. dist., mkd. T27S R3E S11 BT.
	A pinon, 12 ins. diam., bears S. 82° 30' E., 48 lks. dist., mkd. T27S R3E S14 BT.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a mound of stone, 4 ft. base to top, with brass cap mkd.
	T27S R3E S10 | S11 S15 | S14 1967
	Bury original stone cor. alongside iron post.
	Land, mountainous. Soil, rocky loam. Timber, pinon and juniper. Undergrowth, sagebrush.
	From the cor. of secs. 11, 12, 13 and 14.

CHAINS	
	N. 89° 44' W., bet. secs. 11 and 14.
	Over mountainous land through dense timber. By triangulation; desc. about 120 ft. over NW. slope.
12.00	Draw, and trail road, bears N. and S.; asc. about 80 ft. over NE. slope.
29.25	Ridge, bears N. 70° W. and S. 70° E.; desc. 50 ft. over SW. slope. End triangulation.
40.01	The 1/4 sec. cor. of secs. 11 and 14, monumented with a lava stone, 20x14x10 ins., firmly set and plainly mkd. 1/4 on N. face.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T27S R3E ¼ S11/S14 1967
	Bury original stone cor. alongside iron post.
	Raise a mound of stone, 2½ ft. base, 1½ ft. high, N. of cor.
	S. 89° 40' W., beginning new measurement.
	Asc. 20 ft. over SE. slope.
3.80	Spur, slopes S.; desc. 90 ft. over W. slope. Leave timber.
15.00	Flat draw, drains N.; asc. 50 ft. over SE. slope.
23.00	Enter timber.
28.80	Spur, slopes S. 5° E.; desc. 160 ft. over SW. slope.
40.05	The cor. of secs. 10, 11, 14 and 15.
	Land, mountainous. Soil, rocky loam. Timber, pinon and juniper. Undergrowth, sagebrush.
	N. 2° 21' E., bet. secs. 10 and 11.
	Over mountainous land through pinon and juniper timber; asc. 160 ft. over SW. slope.
13.55	Spur, slopes W.; desc. 80 ft. over NW. slope.

CHAINS	
24.80	Head of draw, drains W.; asc. 65 ft. over SW. slope.
30.85	Spur, slopes W.; desc. 105 ft. over NW. slope.
39.81	The 1/4 sec. cor. of secs. 10 and 11, monumented with a lava stone, 24x12x6 ins., firmly set and plainly mkd. 1/4 on W. face. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T27S R3E ¼ S10 | S11 1967 Bury original stone cor. alongside iron post. Raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor.
	———————
	N. 0° 38' W., beginning new measurement. By triangulation; desc. about 200 ft. over NW. slope.
13.00	State Highway No. 72, bears N. 85° W. and S. 85° E.
17.00	Red Canyon, 50 lks. wide, 10 ft. deep, drains S. 80° W.; asc. about 160 ft. over steep S. slope.
35.00	Rim of bench, bears E. and W.; asc. about 40 ft. over gentle S. slope.
40.45	The cor. of secs. 2, 3, 10 and 11, monumented with a lava stone, 20x10x8 ins., firmly set and plainly mkd. 5 notches on S. and 2 on E. edges. End triangulation. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground, and in a collar of stone, with brass cap mkd. T27S R3E S3 | S2 S10 | S11 1967 Bury original stone cor. alongside iron post. Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor. Land, mountainous. Soil, rocky loam. Timber, pinon and juniper. Undergrowth, sagebrush.

CHAINS

From the cor. of secs. 1, 2, 11 and 12.

N. 89° 32' W., bet. secs. 2 and 11.

Over mountainous land through scattered timber; desc. 100 ft. over SW. slope.

14.90 Slope changes; desc. 175 ft. over NW. slope.

29.75 State Highway No. 72, in canyon, bears N. 45° E. and S. 45° W.; asc. 40 ft. over SE. slope.

38.60 The 1/4 sec. cor. of secs. 2 and 11, monumented with a lava stone, 18x16x8 ins., firmly set and plainly mkd. 1/4 on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, with brass cap mkd.

T27S R3E

¼ S2/S11

1967

Bury original stone cor. alongside iron post.

Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.

S. 89° 57' W., beginning new measurement.

Asc. 65 ft. over SE. slope.

9.15 Ridge, bears N. 45° E. and S. 45° W.; desc. 105 ft. over NW. slope.

22.15 Draw, drains N.; asc. 45 ft. over E. slope.

28.80 Hill, bears N. and S.; desc. 80 ft. over NW. slope.

36.00 Slope changes; thence along S. slope.

40.30 The cor. of secs. 2, 3, 10 and 11.

Land, mountainous.
Soil, rocky gravel.
Timber, scattered pinon and juniper.
Undergrowth, sagebrush.

N. 0° 15' E., bet. secs. 2 and 3.

Over mountainous land through scattered timber; asc. 20 ft. over S. slope.

2.40 Ridge, bears E. and W.; desc. 140 ft. over NW. slope.

15.40 Draw, drains W.; asc. 205 ft. over S. slope.

24.75 Ridge, bears N. 45° W. and S. 45° E.; desc. 150 ft. over N. slope.

CHAINS	
39.32	The 1/4 sec. cor. of secs. 2 and 3, monumented with a trachyte stone, 20x10x8 ins., firmly set and plainly mkd. 1/4 on W. face. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, with brass cap mkd. T27S R3E ¼ S3 | S2 1967 Bury original stone cor. alongside iron post. Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.
	N. 1° 42' W., beginning new measurement. Desc. 85 ft. over N. slope.
4.60	Trail road, bears N. 70° W. and S. 70° E.
15.00	Pole Canyon, 50 lks. wide, 15 ft. deep, drains N. 70° W.; asc. 35 ft. over gentle S. slope.
19.10	Graded dirt road, bears N. 45° W. and S. 45° E.
25.25	Begin steep ascent of 220 ft. over steep S. slope.
35.80	Ridge, bears E. and W.; thence over bench land.
40.93	The cor. of secs. 2, 3, 34 and 35, on the N. bdy. of the Tp., hereinbefore described. Land, mountainous. Soil, rocky gravel. Timber, scattered pinon and juniper. Undergrowth, sagebrush.

Reestablishment of the Survey Executed by J. G. Burrill and T. C. Bailey in 1876.

From the cor. of secs. 3, 4, 33 and 34, on the S. bdy. of the Tp., monumented with an iron post, 2½ ins. diam., 18 ins. above ground, and in a mound of stone, with brass cap mkd.

T27S R3E
S33 | S34
S4 | S3
T28S R3E
1966

Thence,

CHAINS	
	N. 0° 05' E., bet. secs. 33 and 34.
	Over rolling bench land through scattered timber; asc. 35 ft. over gentle SW. slope.
11.25	Top of ascent, bears E. and W.; desc. 80 ft. over gentle NW. slope.
27.40	Wash, drains N. 45° W.
37.05	Wash, drains W.; asc. 20 ft. over SW. slope.
40.05	The 1/4 sec. cor. of secs. 33 and 34, monumented with a lava stone, 12x10x8 ins., firmly set and plainly mkd. 1/4 on W. face.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 15 ins. in the ground, and in a mound of stone, 4 ft. base to top, with brass cap mkd.
	T27S R3E ¼ S33 | S34 1966
	Bury original stone cor. alongside iron post.
	N. 0° 09' W., beginning new measurement.
	Asc. 100 ft. over SW. slope.
2.30	Fence, bears E. and W.
10.15	Low ridge, bears N. 50° W. and S. 30° E.; desc. 105 ft. over N. slope.
18.50	Fence, bears irregularly N. 45° E. and S. 45° W., enter abandoned farm land.
24.85	Wash, drains N. 60° W.; thence over gently rolling land.
27.10	Fence, bears E. and W., leave abandoned farm land.
29.50	Wash, drains W.
39.85	Point for the cor. of secs. 27, 28, 33 and 34 at proportionate dist.; there is no remaining evidence of the original cor.
	Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground, and in a mound of stone, 5 ft. base to top, with brass cap mkd.
	T27S R3E S28 | S27 S33 | S34 1966

CHAINS	
	Land, rolling bench land. Soil, rocky gravel. Timber, scattered juniper and pinon. Undergrowth, sagebrush.
	From the true point for the cor. of secs. 26, 27, 34 and 35. S. 89° 57' W., bet. secs. 27 and 34. Over nearly level farm land.
29.78	Fence, bears irregularly N. and S., leave farm land, enter sagebrush undergrowth.
38.25	Trail road, bears irregularly N. and S.
39.50	Point for the 1/4 sec. cor. of secs. 27 and 34 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd. T27S R3E ¼ S27/S34 1967 Desc. 10 ft. over gentle W. slope.
44.00	Leave sagebrush, enter shadscale.
53.45	Rim of bench, bears N. and S.; desc. 85 ft. over W. slope.
66.05	Small draw, drains S.; asc. 50 ft. over E. slope.
73.95	Ridge, bears irregularly N. and S.; desc. 80 ft. over W. slope.
79.00	The cor. of secs. 27, 28, 33 and 34. Land, nearly level bench land E. portion; rolling W. portion. Soil, gravelly. No timber. Undergrowth, sagebrush and shadscale.
	N. 0° 01' E., bet. secs. 27 and 28. Over rolling bench land through sagebrush and shadscale undergrowth.
39.85	The 1/4 sec. cor. of secs. 27 and 28, monumented with a lava stone, 16x9x7 ins., plainly mkd. 1/4 on W. face. At the cor. point

CHAINS	
	Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd. T27S R3E ¼ S28 | S27 1966 Bury original stone cor. in mound of stone alongside iron post.
	N. 0° 06' E., beginning new measurement.
	Continue over rolling bench land.
33.65	Rim of bench, bears N. 50° W. and S. 50° E.; desc. 40 ft. over NE. slope.
39.96	The cor. of secs. 21, 22, 27 and 28, monumented with a lava stone, 12x9x7 ins., firmly set and plainly mkd. 2 notches on S. and 3 on E. edges. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T27S R3E S21 | S22 S28 | S27 1966 Bury original stone cor. alongside iron post. Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor. Land, rolling bench land. Soil, gravelly. No timber. Undergrowth, sagebrush and shadscale.
	From the point for the cor. of secs. 22, 23, 26 and 27. S. 89° 43' W., bet. secs. 22 and 27. Over nearly level farm land.
14.80	Leave farm land, enter rolling hills.
16.40	Low rise, bears N. and S.; desc. 80 ft. over W. slope.
27.10	Wash, drains N. 45° W. about 15.00 chs. to Tidwell Reservoir; asc. 30 ft. over NE. slope.

CHAINS	
33.42	Fence, bears N. 30° W. and S. 30° E.
35.85	Trail road, bears N. 15° W. and S. 15° E.
39.57	Point for the 1/4 sec. cor. of secs. 22 and 27 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T27S R3E ¼ S22/S27 1967 Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor. Asc. 45 ft. over E. slope.
53.95	Ridge, bears N. and S. 45° W.; desc. 160 ft. over W. slope.
76.15	Wash, drains N.; asc. 10 ft. over NE. slope.
79.14	The cor. of secs. 21, 22, 27 and 28. Land, nearly level farm land E. portion; rolling W. portion. Soil, gravelly. No timber. Undergrowth, sagebrush.
	N. 0° 15' W., bet. secs. 21 and 22. Over rolling bench land through sagebrush undergrowth; desc. 15 ft. over NE. slope.
1.25	Ditch, 5 lks. wide, 2 ft. deep, flows irregularly N. 45° W.; asc. 100 ft. over SE. slope.
13.30	Spur, slopes S. 45° W.; desc. 245 ft. over NW. slope.
34.10	Ditch, drains N. 45° E.
39.95	The 1/4 sec. cor. of secs. 21 and 22, monumented with a trachyte stone, 9x7x4 ins., firmly set and plainly mkd. 1/4 on W. face. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T27S R3E ¼ S21|S22 1966 Bury original stone cor. alongside iron post.

CHAINS

N. 0° 13' W., beginning new measurement.

4.91 Fence, bears N. 45° W. and S. 45° E.; enter farm land.

31.75 Irrigation ditch, drains irregularly N. 45° W.; leave farm land.

33.45 Fence, bears irregularly N. 45° W. and S. 45° E.

33.85 Trail road, bears irregularly N. 45° W. and S. 45° E.

39.76 The cor. of secs. 15, 16, 21 and 22, monumented with a trachyte stone, 14x9x7 ins., plainly mkd. 3 notches on S. and E. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T27S R3E

S16	S15
S21	S22

1966

Bury original stone cor. alongside iron post.

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Land, rolling bench and farm land.
Soil, gravelly.
No timber.
Undergrowth, sagebrush.

From the cor. of secs. 14, 15, 22 and 23.

N. 89° 55' W., bet. secs. 15 and 22.

Over broken land through dense timber; desc. 110 ft. over steep SW. slope.

12.10 Head of draw, drains N. 30° W.; asc. 95 ft. over NE. slope.

21.00 Spur, slopes N. 45° W.; desc. 175 ft. over SW. slope.

30.00 Draw, drains N. 30° W.; asc. 160 ft. over NE. slope.

39.42 The 1/4 sec. cor. of secs. 15 and 22, monumented with a lava stone, 18x12x8 ins., firmly set and plainly mkd. 1/4 on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground to bedrock, and in a mound of stone, 3½ ft. base to top, with brass cap mkd.

CHAINS	
	T27S R3E ¼ S15/S22 1967 Bury original stone cor. in mound of stone alongside iron post.
	N. 89° 59' W., beginning new measurement.
	Asc. 5 ft. over E. slope.
2.00	Spur, slopes N.; desc. 80 ft. over NW. slope.
9.80	Head of draw, drains N. 30° W.; thence along N. slope.
14.60	Desc. 215 ft. over NW. slope.
39.66	The cor. of secs. 15, 16, 21 and 22.
	Land, broken. Soil, rocky gravel. Timber, pinon and juniper. Undergrowth, sagebrush.
	N. 0° 42' E., bet. secs. 15 and 16.
	Over mountainous land through scattered timber; desc. 15 ft. over NW. slope.
11.90	Trail road, bears N. 45° E. and S. 45° W.
25.60	Wash, 20 lks. wide, 6 ft. deep, drains S. 45° W.; asc. 210 ft. over SE. slope.
39.99	Point for the 1/4 sec. cor. of secs. 15 and 16 at proportionate dist.; there is no remaining evidence of the original cor.
	Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd. T27S R3E ¼ S16 | S15 1966
	Asc. 40 ft. over SE. slope.
46.50	Ridge, bears N. 50° E. and S. 50° W.; desc. 250 ft. over NW. slope by triangulation.
63.00	Wash, drains S. 70° W., enter farm land.
78.00	Wash, drains S. 40° W.
79.69	Fence, bears E. and W.; end triangulation.

CHAINS	
79.98	Point for the cor. of secs. 9, 10, 15 and 16, at intersection of gravel roads bearing E. and W. and in line with fence line to N.; it is accepted as the best available evidence of the original cor. At the cor. point Bury broken glass, 12 ins. below ground. From which: An iron post, 30 ins. long, 2½ ins. diam., set 24 ins. in the ground, on E. and W. fence line, for a reference monument, bears S. 17° 11' E., 16 ft. dist., with brass cap mkd. T27S R3E S15 RM 16 FT 1966. An iron post, 30 ins. long, 2½ ins. diam., set 24 ins. in the ground, on E. and W. fence line, for a reference monument, bears S. 58° 53' W., 34 ft. dist., with brass cap mkd. T27S R3E S16 RM 34 FT 1966. Land, mountainous S. portion; farm land N. portion. Soil, gravelly. Timber, scattered pinon and juniper S. portion. Undergrowth, sagebrush.
	Reestablishment of the Survey Executed by Andrew P. Hanson in 1895. From the cor. of secs. 10, 11, 14 and 15. S. 89° 43' W., bet. secs. 10 and 15. Over broken land through pinon and juniper timber. By triangulation; desc. about 240 ft. over SW. slope.
12.00	Hector Hollow, drains N. 40° W., with trail road in bottom, bears N. 40° W. and S. 40° E.; asc. about 160 ft. over NE. slope.
24.55	Spur, slopes N., end triangulation; desc. 145 ft. over NW. slope.
39.68	Point for the 1/4 sec. cor. of secs. 10 and 15 at proportionate bearing and distance; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd. T27S R3E ¼ S10/S15 1967

CHAINS	
	Reestablishment of the Survey Executed by J. G. Burrill and T. C. Bailey in 1876.
	S. 89° 56' W., beginning new measurement.
	By triangulation; desc. about 120 ft. over NW. slope.
5.00	Spur, slopes W.; desc. about 160 ft. over W. slope.
34.50	State Highway No. 72, bears W. and N. 35° E.; thence along road.
39.49	The cor. of secs. 9, 10, 15 and 16. End triangulation.
	Land, broken. Soil, gravelly. Timber, pinon and juniper. Undergrowth, sagebrush.
	Reestablishment of the Survey Executed by Andrew P. Hanson in 1895.
	N. 0° 08' W., bet. secs. 9 and 10.
	Over nearly level land, along W. side of gravel road.
0.29	Fence, bears N.; thence along fence line.
40.22	Point for the 1/4 sec. cor. of secs. 9 and 10 at proportionate dist.; falls in entrance to farm roadway; there is no remaining evidence of the original cor.
	Bury broken glass 16 ins. below ground.
	Continue along fence line over nearly level land.
40.42	Point selected for the witness 1/4 sec. cor. of secs. 9 and 10.
	Set an iron post, 30 ins. long, 2½ ins. diam., 16 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd. T27S R3E ¼ S9 | S10 W C 1966
42.15	Red Canyon, drains W.
43.12	Fence, turns N. 3° 30' W., with road along E. side, enter sagebrush.
62.05	Base of spur, bears E. and W.; asc. 55 ft. over S. slope.

CHAINS

67.05 Spur, slopes W. 5.00 chs. to end; desc. 80 ft. over NW. slope.

70.10 Road, Fremont to Mill Mountain Reservoir, bears N. 45° E. and S. 45° W.

75.15 Fremont River, 35 lks. wide, flows S. 45° W.; asc. 35 ft. over SE. slope.

80.44 The cor. of secs. 3, 4, 9 and 10, monumented with a lava stone, 18x10x8 ins., mkd. 5 notches on S. and 3 on E. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T27S R3E

S4	S3
S9	S10

1966

Bury original stone cor. in mound of stone alongside iron post.

Land, nearly level farm land S. portion; mountainous N. portion.
Soil, gravelly loam.
No timber.
Undergrowth, sagebrush.

From the cor. of secs. 2, 3, 10 and 11.

N. 89° 57' W., bet. secs. 3 and 10.

Over mountainous land through scattered timber; desc. 110 ft. over W. slope.

23.50 Saddle, on spur, bears E. and W.; asc. 125 ft. over E. slope.

33.10 Spur, slopes S.; desc. 10 ft. along S. slope.

40.21 The 1/4 sec. cor. of secs. 3 and 10, monumented with a lava stone, 18x12x8 ins., firmly set and plainly mkd. 1/4 on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T27S R3E

¼	S3
	S10

1967

CHAINS	
	Bury original stone cor. alongside iron post. Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.
	S. 89° 58' W., beginning new measurement. Continue along S. slope.
1.00	Rim of bench, bears N. and S.; desc. 215 ft. over steep W. slope.
18.75	Old fence, bears N. 15° W. and S. 15° E.
23.70	Draw, drains N.; asc. 55 ft. over E. slope.
28.05	Spur, slopes S. 20° W.; desc. 155 ft. over NW. slope.
32.75	Graded road, Fremont to Mill Mountain Reservoir, bears N. 40° E. and S. 40° W.
34.05	Fremont River, 35 lks. wide, flows S. 40° W.; asc. 25 ft. over SE. slope.
40.30	The cor. of secs. 3, 4, 9 and 10. Land, mountainous. Soil, gravelly. Timber, scattered pinon and juniper. Undergrowth, sagebrush.
	N. 0° 55' W., bet. secs. 3 and 4. Over mountainous land through sagebrush undergrowth; asc. 155 ft. over SE. slope.
15.50	Spur, slopes E.; desc. 105 ft. over NE. slope.
24.50	Draw, drains S. 45° E. from N.; asc. 85 ft. over S. slope.
27.30	Small spur, slopes W.; desc. 25 ft. over NW. slope.
33.90	Draw, drains W. about 3.00 chs.; thence S.; asc. 80 ft. over SW. slope.
40.38	The 1/4 sec. cor. of secs. 3 and 4, monumented with a lava stone, 20x10x8 ins., plainly mkd. 1/4 on W. face. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T27S R3E
S4 | S3
1966

Bury original stone cor. in mound of stone alongside iron post.

N. 0° 15' W., beginning new measurement.

Asc. 175 ft. over SW. slope.

12.10 Spur, slopes sharply W.; desc. 90 ft. over NW. slope.

18.10 Small ledgy draw, drains W. about 5.00 chs.; thence S.; asc. 65 ft. over SE. slope.

20.10 Small spur, slopes E. desc. 15 ft. over NE. slope.

24.00 Small wash, drains E. about 6.00 chs. to junction; thence SW.; asc. 130 ft. over SW. slope.

40.00 The cor. of secs. 3, 4, 33 and 34, on the N. bdy. of the Tp., hereinbefore described.

Land, mountainous.
Soil, rocky gravel.
No timber.
Undergrowth, sagebrush.

Reestablishment of the Survey Executed by
J. G. Burrill and T. C. Bailey in 1876.

From the cor. of secs. 4, 5, 32 and 33, on the S. bdy. of the Tp., monumented with an iron post, 2½ ins. diam., 6 ins. below ground, with brass cap mkd.

T27S R3E
S32 | S33
S5 | S4
T28S R3E
1966

from which

An iron post, 3½ ins. diam., 6 ins. above ground, bears N. 0° 54' W., 18 ft. dist., with brass cap mkd.

T27S R3E
S32 | S33
18FT | RM
1966

An iron post, 2½ ins. diam., 6 ins. above ground, bears N. 89° 47' E., 12 ft. dist., with brass cap mkd.

CHAINS	
	T27S R3E RM S33 12FT S4 T28S R3E 1966
	Thence,
	N. 0° 54' W., bet. secs. 32 and 33.
	Over nearly level farm land.
0.57	Fences, bearing W. and N. 0° 54' W.; thence along fence line.
24.64	Fence turns N. 45° W., leave fence line and farm land, enter sagebrush; asc. 55 ft. over general S. slope.
26.65	High Line Ditch, drains S. 45° E. from N. 45° W. about 5.00 chs.; thence from W.
29.50	Lime Kill Hollow, drains S. 45° W.
30.61	Transmission line, bears W. and E. about 3.50 chs; thence S. 45° E.
39.75	The 1/4 sec. cor. of secs. 32 and 33, monumented with a lava stone, 12x10x8 ins., plainly mkd. 1/4 on W. face.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 14 ins. in the ground, and in a mound of stone, 4 ft. base to top, with brass cap mkd.
	T27S R3E ¼ S32|S33 1966
	Bury original stone cor. in mound of stone alongside iron post.
	N. 0° 25' W., beginning new measurement.
	Asc. 85 ft. over S. slope.
6.40	Slope changes; asc. 15 ft. along E. slope.
11.80	Low saddle, on ridge, bears N. 45° E. and S. 45° W.; desc. 25 ft. over NW. slope.
18.00	Head of draw, drains S. 45° W.; asc. 110 ft. over S. slope.
31.90	Low ridge, bears W. and N. 45° E.; desc. 30 ft. over NW. slope.
39.36	The cor. of secs. 28, 29, 32 and 33, monumented with a lava stone, 20x20x16 ins., plainly mkd. 1 notch on S. and 4 on E. edges.

CHAINS

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground, and in a mound of stone, 3½ ft. base to top, with brass cap mkd.

T27S R3E

S29	S28
S32	S33

1966

Bury original stone cor. in mound of stone alongside iron post.

Land, nearly level farm land S. portion; mountainous N. portion.
Soil, gravelly.
No timber.
Undergrowth, sage and rabbit brush.

From the cor. of secs. 27, 28, 33 and 34.

S. 89° 26' W., bet. secs. 28 and 33.

Over mountainous land through sage and rabbit brush undergrowth; desc. 35 ft. over W. slope.

0.50 Draw, drains S. 45° W.; desc. 90 ft. over SW. slope.

25.90 Lime Kill Hollow, drains W. from S. 45° E.; desc. 40 ft. along hollow.

31.80 Leave hollow, drains N. 85° W.; desc. 15 ft. along N. slope.

37.62 Fence, bears S. and N. about 3.00 chs.; thence E.

39.84 The 1/4 sec. cor. of secs. 28 and 33, monumented with a lava stone, 20x12x10 ins., plainly mkd. 1/4 on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T27S R3E

¼	S28
	S33

1966

Bury original stone cor. alongside iron post.

Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.

S. 89° 32' W., beginning new measurement.

CHAINS	
	Desc. 25 ft. over gentle W. slope.
11.80	Lime Kill Hollow, drains S. 45° W.; asc. 150 ft. over E. slope.
22.85	Ridge, bears N. and S.; thence along top.
31.05	Desc. 80 ft. over SW. slope.
40.64	The cor. of secs. 28, 29, 32 and 33.
	Land, mountainous. Soil, gravelly. No timber. Undergrowth, sage and rabbit brush.
	N. 0° 29' W., bet. secs. 28 and 29.
	Over rolling bench land through scattered timber; asc. 15 ft. over SW. slope.
4.70	Top of ascent, slopes W.; desc. 65 ft. over NW. slope.
10.40	Draw, drains W.; asc. 150 ft. over SW. slope.
27.70	Spur, slopes S. 45 W.; desc. 135 ft. over NE. slope.
39.19	The 1/4 sec. cor. of secs. 28 and 29, monumented with a limestone, 16x12x6 ins., plainly mkd. 1/4 on W. face.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T27S R3E S29 S28 1966 Bury original stone cor. alongside iron post.
	N. 1° 16' E., beginning new measurement.
1.00	Head of draw, drains E.; asc. 60 ft. over S. slope.
8.40	Ridge, bears E. and W.; desc. 60 ft. over NW. slope.
21.00	Draw, drains S. 45 W.; asc. 110 ft. over S. slope.
31.00	Top of ascent, bears E. and W.; thence along W. slope.
40.31	Point for the cor. of secs. 20, 21, 28 and 29 at proportionate dist.; there is no remaining evidence of the original cor.
	Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

CHAINS	
	T27S R3E S20 | S21 S29 | S28 1966 Land, mountainous. Soil, gravelly. Timber, scattered pinon and juniper. Undergrowth, sagebrush.
	From the cor. of secs. 21, 22, 27 and 28. S. 89° 15' W., bet. secs. 21 and 28. Over mountainous land through scattered timber; desc. 10 ft. over W. slope.
6.40	Base of descent, bears N. 45° E. and S. 45° W.; asc. 50 ft. over rocky E. slope.
13.00	Ridge, bears N. and S.; desc. 90 ft. over W. slope.
20.30	Draw, drains N.; asc. 105 ft. over E. slope.
27.70	Spur, slopes N.; desc. 45 ft. over W. slope.
31.60	Saddle, bears N. and S.; asc. 40 ft. over E. slope.
35.70	Spur, slopes S.; desc. 35 ft. over SW. slope.
39.98	Point for the 1/4 sec. cor. of secs. 21 and 28 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T27S R3E ¼ S21 S28 1966 Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.
42.20	Saddle, bears N. and S.; asc. 40 ft. over E. slope.
47.00	Spur, slopes N.; desc. 110 ft. over W. slope.
55.20	Small draw, drains N.; asc. 75 ft. over E. slope.
61.00	Slope changes; desc. 50 ft. along S. slope.
68.50	Small draw, drains S.; asc. 105 ft. over E. slope.
75.00	Ridge, bears N. and S.; desc. 45 ft. over W. slope.
79.96	The cor. of secs. 20, 21, 28 and 29. Land, mountainous. Soil, gravelly. Timber, scattered pinon and juniper. Undergrowth, sagebrush.

Dependent Resurvey of a Portion of the Subdivision, T. 27 S., R. 3 E.

CHAINS	
	N. 0° 16' E., bet. secs. 20 and 21.
	Over mountainous land through sagebrush undergrowth; asc. 30 ft. along W. slope.
12.20	Top of ascent, bears E. and W.; desc. 175 ft. over NW. slope.
24.70	Trail road, bears E. and W.
26.00	Turnbull Hollow, drains W.; asc. 195 ft. over Se. slope.
40.30	Point for the 1/4 sec. cor. of secs. 20 and 21 at proportionate dist.; there is no remaining evidence of the original cor.
	Set an iron post, 30 ins. long, 2½ ins. diam., 14 ins. in the ground, and in a mound of stone, 4 ft. base to top, with brass cap mkd.
	T27S R3E ¼ S20 | S21 1966
	Desc. 15 ft. along E. slope.
43.30	Ridge, bears N. 45° E. and S. 45° W.; desc. 35 ft. over NW. slope.
55.30	Head of draw, drains W.; asc. 15 ft. along W. slope.
59.90	Point of spur, slopes W.; desc. 80 ft. over NW. slope.
66.60	Draw, drains W.; asc. 20 ft. over SE. slope.
72.20	Spur, slopes S. 80° W.; desc. 105 ft. over NW. slope.
80.60	The cor. of secs. 16, 17, 20 and 21, monumented with a lava stone, 16x10x8 ins., mkd. 4 notches on S. and E. edges.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.
	T27S R3E S17 | S16 S20 | S21 1966
	Bury original stone cor. in mound of stone alongside iron post.
	Land, mountainous. Soil, gravelly. No timber. Undergrowth, sagebrush.

CHAINS	
	From the cor. of secs. 15, 16, 21 and 22.
	S. 89° 50' W., bet. secs. 16 and 21.
	Over gently rolling land through sagebrush undergrowth; desc. 30 ft. over gentle W. slope.
2.45	Trail road, bears S. and N. 5.00 chs.; thence N. 60° W.
2.98	Fence, bears N. and S.
5.25	Irrigation ditch, 3 lks, wide, 1 ft. deep, flows irregularly N. 60° E.
7.15	Enter cultivated land, bears N. 60° E. and S. 60° W.
21.40	Fence, bears N. and S., leave cultivated land.
27.35	Trail road, bears N. 25° W. and S. 25° E.; asc. 170 ft. over NE. slope, enter scattered timber.
39.66	Point for the 1/4 sec. cor. of secs. 16 and 21 at proportionate dist.; there is no remaining evidence of the original cor.
	Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.
	T27S R3E ¼ S16 S21 1967
	Asc. 135 ft. over NE. slope.
50.40	Spur, slopes N.; desc. 90 ft. over NW. slope.
58.00	Head of draw, drains N. 40° W.; asc. 85 ft. over NE. slope.
65.55	Spur, slopes N.; desc. 260 ft. over NW. slope.
79.32	The cor. of secs. 16, 17, 20 and 21.
	Land, gently rolling E. portion; mountainous W. portion. Soil, gravelly. Timber, scattered juniper and pinon W. portion. Undergrowth, sagebrush.
	N. 0° 07' E., bet. secs. 16 and 17.
	Over mountainous land through sagebrush undergrowth; desc. 10 ft. over NW. slope.
0.90	Wash, drains W.; asc. 40 ft. over S. slope.
3.90	Low spur, slopes W.; desc. 150 ft. over NW. slope.

CHAINS	
15.90	High Line Ditch, at base of hills, drains S. 45° W., enter nearly level land.
16.30	Improved road, bears N. 45° E. and S. 45° W.
16.62	Fence, bears N. 45° E. and S. 45° W., enter cultivated land.
30.90	Wash, drains N. 45° W.
38.90	House, on line.
39.92	Point for the 1/4 sec. cor. of secs. 16 and 17 at proportionate dist. longitudinally and controlled by E. and W. fence line latitudinally. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T27S R3E ¼ S17 | S16 1966
	N. 0° 07' E., beginning new measurement.
0.45	Center line of State Highway No. 72, bears W. and E. 3.50 chs.; thence N. 45° E., enter farm land.
4.30	Fremont River, flows S. 45° W.
11.05	Old fence line, bears E. and W., fence, bears N.; thence along fence line.
39.78	Point for the cor. of secs. 8, 9, 16 and 17 at cor. of fences bearing N., S., E. and W.; it is accepted as the best available evidence of the position of the original cor. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd. T27S R3E S8 | S9 S17 | S16 1966 Land, mountainous S. portion; nearly level farm land N. portion. Soil, gravelly loam. No timber. Undergrowth, sagebrush.
	From the cor. of secs. 9, 10, 15 and 16. S. 89° 40' W., bet. secs. 9 and 16. Over nearly level farm land, along State Highway No. 72, with fences along both sides of highway.

CHAINS	
40.03	Point for the 1/4 sec. cor. of secs. 9 and 16 at proportionate dist. falls in highway; there is no remaining evidence of the original cor. Bury broken glass, 14 ins. below ground. From which, An iron post, 30 ins. long, 2½ ins. diam., set 24 ins. in the ground for a reference monument, on E. and W. fence line, bears S. 33° 30' E., 20 ft. dist., with brass cap mkd. T27S R3E ¼S16 RM 20 FT 1966, and an arrow pointing to the true cor. An iron post, 30 ins. long, 2½ ins. diam., set 24 ins. in the ground for a reference monument, on E. and W. fence line, bears S. 40° 30' W., 24 ft. dist., with brass cap mkd. T27S R3E ¼S16 RM 24 FT 1966, and an arrow pointing to the true cor. Continue along highway.
59.50	Leave highway, bears S. 45° W., fence, parallel to highway and also bears S. 89° 40' W.; thence along fence line.
72.50	Fremont River, flows S. 10° W.
80.06	The cor. of secs. 8, 9, 16 and 17. Land, nearly level farm land. Soil, gravelly loam. No timber. Undergrowth, scattered patches of sagebrush.

Reestablishment of the Survey Executed by
Andrew P. Hanson in 1895.

	N. 0° 13' E., bet. secs. 8 and 9. Over nearly level farm land, along fence line.
13.05	Canal, drains irregularly W.
14.10	Fence, bears irregularly E. and W., leave N. and S. fence line and farm land.
14.80	Trail road, bears irregularly E. and W.; asc. 260 ft. over S. slope.
30.35	Ledge, 15 ft. high, bears E. and W.; asc. 165 ft. over rocky S. slope.
40.53	The 1/4 sec. cor. of secs. 8 and 9, monumented with a lava stone, 20x16x6 ins., plainly mkd. 1/4 on W. face. At the cor. point

CHAINS	
	Set an iron post, 30 ins. long, 2½ ins. diam., 5 ins. in the ground to bedrock, and in a mound of stone, 5 ft. base to top, with brass cap mkd. T27S R3E ¼ S8 | S9 1966 Bury original stone cor. in mound of stone alongside iron post.
	N. 0° 32' W., beginning new measurement.
	Asc. 115 ft. over S. slope.
10.45	Ridge, bears E. and W.; desc. 20 ft. over NW. slope.
28.45	Head of draw, drains N. 60° W.; asc. 20 ft. along W. slope.
33.65	Spur, slopes W.; desc. 50 ft. over NW. slope.
40.45	The cor. of secs. 4, 5, 8 and 9, monumented with a lava stone, 18x18x12 ins., plainly mkd. 5 notches on S. and 4 on E. edges.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd. T27S R3E S5 | S4 S8 | S9 1966 Bury original stone cor. alongside iron post. Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.
	Land, nearly level farm land S. portion; mountainous N. portion. Soil, rocky gravel. No timber. Undergrowth, sagebrush.
	From the cor. of secs. 3, 4, 9 and 10.
	S. 89° 39' W., bet. secs. 4 and 9.
	Over mountainous land through sagebrush undergrowth.
2.75	Base of hill, bears N. and curves S. 45° W.; asc. 185 ft. over steep E. slope.

CHAINS	
8.00	Rocky point, slopes S.; thence along S. slope.
12.80	Spur, slopes S.; desc. 25 ft. over SW. slope.
19.00	Head of draw, drains S. 15° E.; asc. 100 ft. over SE. slope.
29.15	Ridge, bears N. and S.; desc. 165 ft. over ledgy SW. slope.
36.15	Ledgy draw, drains S. 45° E.; asc. 130 ft. over ledgy E. slope.
39.97	The 1/4 sec. cor. of secs. 4 and 9, monumented with a lava stone, 18x12x8 ins., plainly mkd. 1/4 on N. face.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.
	T27S R3E ¼ S4/S9 1966
	Bury original stone cor. in mound of stone alongside iron post.
	N. 89° 32' W., beginning new measurement.
	Asc. 50 ft. over E. slope.
3.95	Low spur, slopes N.; desc. 50 ft. over NW. slope.
12.65	Trail road, in swale, bears N. and S.; asc. 95 ft. over E. slope.
28.35	Low ridge, bears N. and S.; desc. 70 ft. over W. slope.
40.13	The cor. of secs. 4, 5, 8 and 9.
	Land, mountainous. Soil, rocky gravel. No timber. Undergrowth, sagebrush.
	N. 0° 07' W., bet. secs. 4 and 5.
	Over mountainous land through sagebrush undergrowth; asc. 165 ft. over S. slope.
24.75	Spur, slopes S. 45° E.; desc. 85 ft. over N. slope.

CHAINS	
33.80	Draw, drains E.; asc. 85 ft. over SW. slope.
40.41	The 1/4 sec. cor. of secs. 4 and 5, monumented with a lava stone, 14x12x6 ins., plainly mkd. 1/4 on W. face.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.
	T27S R3E ¼ S5|S4 1966
	Bury original stone cor. in mound of stone alongside iron post.
	N. 1° 39' W., beginning new measurement.
	Asc. 25 ft. over SW. slope.
3.35	Low spur, slopes S. 45° E.; asc. 50 ft. over SE. slope.
13.45	Head of draw, drains S. 45 E.; asc. 75 ft. over SE. slope.
20.00	Trail road, bears N. 45° E. and S. 45° W.
23.05	Low ridge, bears E. and W.; desc. 75 ft. over NE. slope.
25.25	Trail road, bears N. 45° W. and S. 45° E. and forks E.
39.64	Fence, bears E. and W.
39.65	The cor. of secs. 4, 5, 32 and 33, on the N. bdy. of the Tp., hereinbefore described.
	Land, mountainous. Soil, rocky gravel. No timber. Undergrowth, sagebrush.
	Reestablishment of the Survey Executed by J. G. Burrill and T. C. Bailey in 1876.
	From the cor. of secs. 28, 29, 32 and 33.
	N. 89° 27' W., bet. secs. 29 and 32.
	Over mountainous land through sagebrush undergrowth; asc. 40 ft. over E. slope.
5.80	Spur, slopes N.; desc. 85 ft. over W. slope.
12.00	Small hollow, drains N.; asc. 60 ft. over E. slope.
16.90	Spur, slopes N.; desc. 165 ft. over W. slope.

CHAINS	
23.90	Draw, drains S.; asc. 190 ft. over E. slope.
34.50	Slope changes; thence along N. slope.
40.03	The 1/4 sec. cor. of secs. 29 and 32, monumented with a lava stone, 20x18x7 ins., plainly mkd. 1/4 on N. face. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 15 ins. in the ground, and in a mound of stone, 4 ft. base to top, with brass cap mkd. T27S R3E ¼ S29/S32 1966 Bury original stone cor. alongside iron post.
	N. 89° 28' W., beginning new measurement. Asc. 60 ft. over NE. slope.
10.80	Ridge, bears N. and S. 45° E.; desc. 275 ft. over W. slope.
31.20	High Line Ditch, drains S. along base of ridge; desc. 40 ft. over gentle W. slope.
38.86	The cor. of secs. 29, 30, 31 and 32, monumented with a lava stone, 18x18x15 ins., plainly mkd. 1 notch on S. and 5 on E. edges. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground, and in a collar of stone, with brass cap mkd. T27S R3E S30 | S29 S31 | S32 1966 Bury original stone cor. alongside iron post. Land, mountainous. Soil, rocky gravel. No timber. Undergrowth, sagebrush.
	North, bet. secs. 29 and 30. Over gently rolling land through sagebrush undergrowth; along E. side of farm land.
10.21	Fence, bears E., W. and N.; thence along fence line.

CHAINS	
39.34	Fence, bears W., continues along fence line.
39.93	Point for the 1/4 sec. cor. of secs. 29 and 30 at proportionate dist. latitudinally and controlled by N. and S. fence line longitudinally; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd. T27S R3E ¼ S30 | S29 1966
	N. 0° 03' W., beginning new measurement. Continue along E. side of farm land along fence line.
10.45	Fence, bears W., continue along fence line.
19.63	Fence, bears E., enter farm land, continue along fence line.
20.63	Fence, bears W., with ditch alongside, drains W., continue along fence line.
39.40	Fence, bears E. and S. 45° W., leave farm land.
39.93	Point for the cor. of secs. 19, 20, 29 and 30, on edge of State Highway No. 72, and in line with property line fences to S. and W., according to statement by J. H. Tanner and Glen Taylor, adjacent property owners; it is accepted as the best available evidence of the position of the original cor. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 30 ins. in the ground, with brass cap mkd. T27S R3E S19 | S20 S30 | S29 1966 Land, nearly level. Soil, gravelly. No timber. Undergrowth, sagebrush.
	From the cor. of secs. 20, 21, 28 and 29. N. 89° 10' W., bet. secs. 20 and 29. Over mountainous land through sagebrush undergrowth; desc. 55 ft. over W. slope.

CHAINS	
5.05	Small draw, drains S.; asc. 130 ft. over SE. slope.
35.60	Ridge, bears N. and S.; desc. 25 ft. over gentle W. slope.
39.73	Point for the 1/4 sec. cor. of secs. 20 and 29 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T27S R3E ¼ S20/S29 1966 Raise a mound of stone, 4 ft. base, 3 ft. high, N. of cor. Desc. 30 ft. over gentle W. slope.
47.40	Rim of ridge, bears N. and S.; thence by triangulation; desc. about 280 ft. over steep W. slope.
63.50	Base of steep descent, draw, drains N. 80° W.; desc. about 40 ft. over gentle W. slope.
64.50	High Line Ditch, drains S. along base of ridge, enter farm land.
79.46	The cor. of secs. 19, 20, 29 and 30. End triangulation. Land, mountainous E. portion; nearly level farm land W. portion. Soil, gravelly. No timber. Undergrowth, sagebrush.
	North, bet. secs. 19 and 20. Over nearly level farm land and along State Highway No. 72.
36.70	Bridge, over Fremont River; river flows S. 45° W.
39.75	Point for the 1/4 sec. cor. of secs. 19 and 20 at proportionate dist. falls on E. edge of highway; there is no remaining evidence of the original cor. At the cor. point Bury broken glass 12 ins. below ground. From which, An iron post, 30 ins. long, 2½ ins. diam., set 24 ins. in the ground, for a reference monument, bears S. 52° 44' E., 11 ft. dist., with brass cap mkd. T27S R3E ¼S20 RM 11 FT 1966, and an arrow pointing to the true cor.

CHAINS	
	An iron post, 30 ins. long, 2½ ins. diam., set 24 ins. in the ground, for a reference monument, bears N. 37° 45' E., 18 ft. dist., with brass cap mkd. T27S R3E ¼S20 RM 18 FT 1966, and an arrow pointing to the true cor.
	Continue along State Highway No. 72.
79.50	Point for the cor. of secs. 17, 18, 19 and 20, at intersection of highway and gravel road bearing E. and W., and a cross (+) painted on highway; it is accepted as the best available evidence of the position of the original cor.
	At the cor. point
	Drive a nail, 1/4 in. diam., 6 ins. long, flush with road surface.
	From which,
	An iron post, 30 ins. long, 2½ ins. diam., set 24 ins. in the ground, for a reference monument, bears S. 49° E., 55 ft. dist., with brass cap mkd. T27S R3E S20 RM 55 FT 1966, and an arrow pointing to the true cor.
	An iron post, 30 ins. long, 2½ ins. diam., set 24 ins. in the ground, for a reference monument, bears S. 46° 30' W., 53 ft. dist., with brass cap mkd. T27S R3E S19 RM 53 FT 1966, and an arrow pointing to the true cor.
	Land, nearly level farm land. Soil, gravelly. No timber. No undergrowth.
	From the cor. of secs. 16, 17, 20 and 21.
	N. 89° 55' W., bet. secs. 17 and 20.
	Over rolling land through sagebrush undergrowth; desc. 100 ft. over SW. slope.
8.00	Draw, drains N. 45° W.; desc. 45 ft. over NW. slope.
18.60	High Line Ditch, drains W. from N. 45° E.; thence along N. bank of ditch and along road, bears W. and N. 45° E.
25.12	Leave bank of ditch, bears E. and S. 45° W., continue along road, with fences along N. and S. sides.
39.92	Point for the 1/4 sec. cor. of secs. 17 and 20 at proportionate dist., falls in road; there is no remaining evidence of the original cor.
	Bury broken glass, 14 ins. below ground.
	From which,

CHAINS	
	An iron post, 30 ins. long, 2½ ins. diam., set 24 ins. in the ground, for a reference monument, on E. and W. fence, bears S. 32° 05' E., 10 ft. dist., with brass cap mkd. T27S R3E ¼S20 RM 10 FT 1966, and an arrow pointing to the true cor.
	An iron post, 30 ins. long, 2½ ins. diam., set 24 ins. in the ground, for a reference monument, on E. and W. fence line, bears S. 24° 04' W., 10 ft. dist., with brass cap mkd. T27S R3E ¼S20 RM 10 FT 1966, and an arrow pointing to the true cor.
	Continue along road.
46.30	Fremont River, flows S. 45° W.
79.84	The cor. of secs. 17, 18, 19 and 20.
	Land, rolling E. portion; nearly level farm land W. portion. Soil, gravelly. No timber. Undergrowth, sagebrush.
	N. 89° 53' W., bet. secs. 18 and 19.
	Over nearly level farm land along gravel road, fence along N. and S. sides.
39 27	Point for the 1/4 sec. cor. of secs. 18 and 19 at proportionate dist. latitudinally and controlled by farm lane to N. longitudinally.
	Bury broken glass, 14 ins. below ground.
	From which,
	An iron post, 30 ins. long, 2½ ins. diam., set 22 ins. in the ground, for a reference monument, bears S. 23° 19' E., 30 ft. dist., with brass cap mkd. T27S R3E ¼S19 RM 30FT 1966, and an arrow pointing to the true cor.
	An iron post, 30 ins. long, 2½ ins. diam., set 22 ins. in the ground, for a reference monument, bears S 27° 30' W., 29 ft. dist., with brass cap mkd. T27S R3E ¼S19 RM 29FT 1966, and an arrow pointing to the true cor.
	N. 89° 53' W., beginning new measurement.
	Continue along gravel road.
15.50	Small canal, drains S. 45° W., leave farm land.
19.25	Hard surface highway, bears N. 45° E. and S. 45° W., leave gravel road; asc. 180 ft. along general S. slope.
24.75	Telephone line, bears N. 62° 58' E. to Fremont and S. 62° 58' W., 2.00 chs.; thence S. 45° W.
38.12	The cor. of secs. 13, 18, 19 and 24, on the W. bdy. of the Tp., hereinbefore described.

Dependent Resurvey of a Portion of the Subdivision, T. 27 S., R. 3 E.

CHAINS	
	Land, nearly level farm land E. portion; rolling W. portion. Soil, gravelly. No timber. Undergrowth, sagebrush, W. portion.
	From the cor. of secs. 17, 18, 19 and 20. N. 0° 30' W., bet. secs. 17 and 18. Over nearly level land along State Highway No. 72, through E. edge of Fremont, Utah.
25.95	Highway curves N. 45° E., enter lane.
30.15	Fremont-Loa Ditch, drains S. 70° W.; asc. 200 ft. over steep S. slope, leave lane.
40.23	The 1/4 sec. cor. of secs. 17 and 18, monumented with a lava stone, 18x10x7 ins., plainly mkd. 1/4 on W. face. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground, and in a mound of stone, 4 ft. base to top, with brass cap mkd. T27S R3E S18 | S17 1966 Bury original stone cor. in mound of stone alongside iron post.
	N. 0° 47' W., beginning new measurement. Asc. 155 ft. over S. slope.
20.00	Spur, slopes E.; desc. 30 ft. over N. slope.
23.30	Small draw, drains E.; asc. 95 ft. over SE. slope.
37.00	Base of ridge, bears E. and W.; asc. 115 ft. over steep S. slope, enter timber.
40.29	The cor. of secs. 7, 8, 17 and 18, monumented with a lava stone, 18x10x7 ins., plainly mkd. 4 notches on S. and 5 on E. edges. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd. T27S R3E S7 | S8 S18 | S17 1966

CHAINS	
	Bury original stone cor. in mound of stone alongside iron post.
	Land, nearly level S. portion; mountainous N. portion. Soil, gravelly. Timber, pinon and juniper N. 3.00 chs. Undergrowth, sagebrush and shadscale.
	From the cor. of secs. 8, 9, 16 and 17.
	S. 89° 26' W., bet. secs. 8 and 17.
	Over nearly level farm land, along fence line.
23.17	Fence, bears S. 45° W., leave fence line and farm land.
23.55	Trail road, bears N. 45° E. and S. 45° W.
24.30	Fremont-Loa Ditch, drains S. 45° W. along base of hill; asc. 195 ft. over SE. slope.
32.50	Draw, drains S. 45° E.
37.80	Trail road, bears N. and S.
40.48	The 1/4 sec. cor. of secs. 8 and 17, monumented with a lava stone, 12x10x6 ins., plainly mkd. 1/4 on N. face.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 4 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.
	T27S R3E ¼ — S8 / S17 1966
	Bury original stone cor. in mound of stone alongside iron post.
	N. 88° 09' W., beginning new measurement.
	Asc. 20 ft. over SE. slope, enter dense timber.
5.05	Spur, slopes S. 45° E.; desc. 50 ft. over SW. slope.
9.05	Draw, drains S. 45° E.; asc. 80 ft. over E. slope.
10.15	Trail road, bears N. 45° W. and S. 45° E.
13.45	Spur, slopes S. 50° E. from W.; asc. 65 ft. over E. slope.
30.00	Slope changes; asc. 160 ft. over steep SE. slope.
40.43	The cor. of secs. 7, 8, 17 and 18.

CHAINS	
	Land, nearly level farm land E. portion; mountainous W. portion. Soil, rocky gravel. Timber, dense pinon and juniper W. portion. Undergrowth, sagebrush.
	West, bet. secs. 7 and 18. Over mountainous land through dense timber; asc. 125 ft. over SE. slope.
7.65	Rim of bench, bears N. 45° E. and S. 45° W.; asc. 40 ft. over gently rolling bench land through scattered timber.
40.17	The 1/4 sec. cor. of secs. 7 and 18, monumented with a quartz stone, 18x12x7 ins., plainly mkd. 1/4 on N. face. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd. T27S R3E ¼ S7/S18 1966 Bury original stone cor. in mound of stone alongside iron post.
	S. 89° 07' W., beginning new measurement. Desc. 15 ft. over gentle SW. slope.
26.30	Small draw, drains S.; asc. 35 ft. over SE. slope.
35.32	The cor. of secs. 7, 12, 13 and 18, on the W. bdy. of the Tp., hereinbefore described. Land, broken and rolling bench land. Soil, rocky gravel. Timber, pinon and juniper. Undergrowth, sagebrush.
	From the cor. of secs. 7, 8, 17 and 18. N. 0° 34' E., bet. secs. 7 and 8. Over mountainous land through scattered timber; asc. 105 ft. over S. slope.
2.75	Rim of bench, bears E. and W.; thence over bench land.
19.90	Enter dense timber.
27.85	Crest of bench, bears N. 45° W. and S. 45° E.; desc. 140 ft. over rocky NE. slope; leave timber.
36.55	Base of steep descent, bears N. 45° W. and S. 45° E.; desc. 10 ft. along E. slope.

CHAINS	
40.07	The 1/4 sec. cor. of secs. 7 and 8, monumented with a lava stone, 17x10x7 ins., plainly mkd. 1/4.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T27S R3E ¼ S7|S8 1966
	Bury original stone cor. alongside iron post.
	Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.
	N. 0° 09' E., beginning new measurement.
	Along general E. slope.
0.40	Trail road, bears N. 45° E. and S. 45° W.
23.15	Wash, drains E.
35.15	Wash, with trail road in bottom, drains S. 60° E. from N. 20° W.; asc. 25 ft. over SW. slope.
40.13	The cor. of secs. 5, 6, 7 and 8, monumented with a lava stone, 24x20x18 ins., plainly mkd. 5 notches on S. and E. edges.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.
	T27S R3E S6|S5 S7|S8 1966
	Bury original stone cor. in mound of stone alongside iron post.
	Land, broken and rolling bench land. Soil, rocky gravel. Timber, pinon and juniper. Undergrowth, sagebrush.
	From the cor. of secs. 4, 5, 8 and 9.
	N. 89 42' W., bet. secs. 5 and 8.

Dependent Resurvey of a Portion of the Subdivision, T. 27 S., R. 3 E.

CHAINS	
	Over mountainous land through sagebrush undergrowth; desc. 10 ft. over W. slope.
5.00	Draw, drains S.; asc. 40 ft. over E. slope.
13.00	Top of ascent, slopes S.; desc. 35 ft. along S. slope.
40.10	The 1/4 sec. cor. of secs. 5 and 8, monumented with a lava stone, 18x10x5 ins., mkd. 1/4 on N. face.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T27S R3E ¼ S5/S8 1966
	Bury original stone cor. alongside iron post.
	Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.
	S. 89° 54' W., beginning new measurement.
	Asc. 100 ft. along general S. slope.
5.00	Trail road, bears irregularly N. and S.
18.00	Trail road, bears N. 45° W. and S. 45° E.
38.00	Top of ascent, bears N. and S.; desc. 15 ft. over W. slope.
40.01	The cor. of secs. 5, 6, 7 and 8.
	Land, mountainous. Soil, rocky gravel. No timber. Undergrowth, sagebrush.
	S. 89° 55' W., bet. secs. 6 and 7.
	Over mountainous land through sagebrush undergrowth; desc. 20 ft. over SW. slope.
3.00	Draw, drains S. 20° E; asc. 45 ft. over NE. slope.
20.95	Base of ledgy ascent, bears N. and S.; asc. 210 ft. over broken and ledgy E. slope.
27.85	Ledgy rim, bears irregularly N. and S.; desc. 40 ft. over W. slope.
34.80	Small draw, drains N. 45° E.; asc. 45 ft. over E. slope.

CHAINS	
39.94	The 1/4 sec. cor. of secs. 6 and 7, monumented with a lava stone, 18x14x10 ins., dimly mkd. 1/4 and witnessed by a mound of stone to N. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd. T27S R3E ¼ S6/S7 1966 Bury original stone cor. alongside iron post. Rebuild mound of stone, 3 ft. base, 2 ft. high, N. of cor.
	S. 89° 52' W., beginning new measurement. Asc. 35 ft. over gentle E. slope.
11.30	Top of ascent, slopes S.; desc. 15 ft. along S. slope.
35.32	The cor. of secs. 1, 6, 7 and 12, on the W. bdy. of the Tp., hereinbefore described. Land, mountainous. Soil, rocky gravel. No timber. Undergrowth, sagebrush.
	From the cor. of secs. 5, 6, 7 and 8. North, bet. secs. 5 and 6. Over mountainous land through sagebrush undergrowth; asc. 25 ft. over SW. slope.
11.20	Spur, slopes S. 40° E.; desc. 30 ft. over NE. slope.
21.40	Draw, drains S. 80° E.; asc. 150 ft. over SW. slope.
37.10	Spur, slopes nearly S.; desc. 20 ft. along W. slope.
40.20	The 1/4 sec. cor. of secs. 5 and 6, monumented with a lava stone, 18x12x4 ins., plainly mkd. 1/4 on W. face. From which the original bearing trees: A juniper, 15 ins. diam., bears S. 30° 45' E., 33 lks. dist., mkd. 1/4S BT. A dead and fallen pinon, 13 ins. diam., bears N. 25° 20' W., 117 lks. dist., mkd. 1/4S BT.

Dependent Resurvey of a Portion of the
Subdivision, T. 27 S., R. 3 E.

CHAINS	
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground, and in a mound of stone, 4 ft. base to top, with brass cap mkd.
	T27S R3E ¼ S6 | S5 1966
	Bury original stone cor. in mound of stone alongside iron post.
	N. 1° 44' W., beginning new measurement.
	Asc. 170 ft. over SW. slope, enter scattered timber.
6.50	Rocky point, slopes W.; thence along W. slope.
13.50	Spur, slopes W.; desc. 80 ft. over NW. slope.
24.50	Trail road, bears N. 45° E. and S. 45° W.
25.50	Draw, drains S. 45° W. from N.; asc. 235 ft. along draw.
39.99	The cor. of secs. 5, 6, 31 and 32, on the N. bdy. of the Tp., hereinbefore described.
	Land, mountainous. Soil, rocky gravel. Timber, scattered pinon and juniper N. portion. Undergrowth, sagebrush.

General Description

Township 27 South, Range 3 East is located 1 mile north of Lyman, Utah and Fremont, Utah is located in sections 17, 18, 19 and 20. It is mostly mountainous land covered with pinon and juniper timber in the eastern portion and scattered patches of pinon and juniper in the western portion with undergrowth of sagebrush and shadscale. The soil is rocky gravel. The area is drained in a general southwesterly direction by numerous draws and washes draining into the Fremont River which flows from Mill Mountain Reservoir, located in section 3, and flows southwesterly through the township leaving in section 20. There are several ranches located on the Fremont Bench in sections 9, 10, 16, 17, 18, 19 and 20, and in Horse Valley, located in sections 22,23, 26, 27, 34 and 35. State Highway No. 72 enters the township in section 1 and bears southwesterly through the township to Fremont. Elevation of the township ranges from 7,000 ft. in the southwest corner to 9,900 ft. above sea level in the southeast corner, the highest portion of the township.

Blank

Page

Form 4-680
(June 1963)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS

NAMES	CAPACITY
Morris E. Blackburn	Surveying Aid
Merlin J. Robinson	Surveying Aid
Gail E. Reynolds	Surveying Aid
Calvin L. Christensen	Surveying Aid
Jay L. Hyatt	Surveying Aid
Grover A. Smith	Surveying Aid

GPO 834685

CERTIFICATE OF SURVEY

I, Craig P. Sylvester, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 2nd day of June, 1966, I have dependently resurveyed a portion of the Fremont Valley Guide Meridian (West Boundary), the North Boundary and a portion of the subdivisional lines of Township 27 South, Range 3 East

of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

May 16, 1968
(Date)

Craig P. Sylvester
(Cadastral Surveyor)
SUPERVISORY

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

SUBMITTED FOR APPROVAL
Date NOV 27 1968

BUREAU OF LAND MANAGEMENT,
Washington, D. C.

The foregoing field notes of the dependent resurvey of a portion of the Fremont Vall Guide Meridian (West Boundary), the North Boundary and a portion of the subdivisional lines of Township 27 South, Range 3 East

executed by Craig P. Sylvester, Supervisory Cadastral Surveyor

having been critically examined and found correct, are hereby approved.

APR 18 1969
(Date)

Clark F. Gumm
(Chief, Division of Engineering)
Chief, Division of Cadastral Survey

CERTIFICATE OF TRANSCRIPT

~~I CERTIFY That the foregoing transcript of the field notes of the above described surveys in~~

, is a true copy of the original field notes.

~~(Date)~~

~~(Chief, Division of Engineering)~~

Blank

Page

Blank

Page

(formerly 4-679)

DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

ORIGINAL

FIELD NOTES

OF THE

RETRACEMENT OF A PORTION OF THE SOUTH BOUNDARY

THE

DEPENDENT RESURVEY

OF

A PORTION OF THE SOUTH BOUNDARY

THE NORTH AND WEST BOUNDARIES

AND

THE SUBDIVISIONAL LINES

OF

TOWNSHIP 7 SOUTH, RANGE 6 WEST

1969 MAY 15 AM 10 00 0

Of the SALT LAKE Meridian,

In the State of UTAH.

EXECUTED BY

GLEN B. HATCH SUPERVISORY CADASTRAL SURVEYOR

Under special instructions dated MAY 18, 19 65, which provided for the surveys included under Group Number 470, approved MAY 20, 1965, and assignment instructions dated AUGUST 30, 19 65.

Survey commenced OCTOBER 17, 19 66

Survey completed JUNE 30, 19 67

INDEX DIAGRAM

Township 7 SOUTH, Range 6 WEST,

24 17 6 83	23 84 5 82	22 69 4 68	21 57 3 56	20 44 2 43	19 34 1 33
15 7 80	81 8 80	67 9 66	55 10 54	42 11 41	32 12 32
13 18 77	78 17 77	64 16 63	52 15 51	40 14 39	30 13 30
11 19 75	76 20 74	62 21 61	50 22 49	38 23 37	29 24 28
9 30 72	73 29 71	60 28 59	47 27 47	36 26 35	27 25 26
7 31 5	70 32 3	58 33 3	45 34 2	35 35	25 36

GPO 849-505

CHAINS

The east boundary was surveyed by Julian Bausman in 1869 and resurveyed by Ralph Gentry, et. al. in 1944. The east 3½ miles of the south boundary were surveyed by A. D. Ferron in 1871. The west 2½ miles of the south boundary were surveyed by A. J. Stookey in 1899. The west 2 miles of the south boundary were retraced by H. W. Miller and I. Hayes in 1915. The east 3 miles were resurveyed by Ralph Gentry in 1939. The west boundary was surveyed by A. J. Stookey in 1899. The east 2½ miles of the north boundary were surveyed by C. L. Craig in 1856. The west 3½ miles of the north boundary were surveyed by A. J. Stookey in 1899. Sections 1, 12, 13, 24, 25, 26, 35 and 36 were surveyed by A. D. Ferron in 1871 and the remainder surveyed by A. J. Stookey in 1899. The following field notes are those of a retracement of a portion of the south boundary to resolve a misclosure of sec. 34, the dependent resurvey of the north and west boundaries; a portion of the south boundary and the subdivisional lines of Township 7 South, Range 6 West.

The survey was conducted in accordance with the specifications as set forth in the Manual of Surveying Instructions 1947, and special instructions dated May 18, 1965.

Before restoring the corners, the lines of the original survey were retraced and diligent search made for any evidence of the original corners, bearing trees or other calls of the original field note record.

The rules of proportionate measurement were applied to ascertain the positions of the lost corners, but not until exhausting every reasonable possibility of finding direct evidence for the control of each particular corner.

The direction of the lines of this survey were determined by reference to true meridians established on line by hour angle observations on Polaris. The lines were carried forward by sustained angulation being supplemented by altitude observations on the sun.

The position of the southeast corner of the township is at Latitude 40° 09' 28.4" N. and Longitude 112° 27' 31.2" W., as computed from section line ties to U.S.G.S. triangulation station "Stookey," at Latitude 40° 14' 55.217" N. and Longitude 112° 32' 33.819" W., located N. 11° 19' 30" E., 19.944 chs. dist. from the ¼ sec. cor. of secs. 5 and 32, on the north boundary of the township.

The magnetic declination was read at several stations in the township and the average of these readings was found to be 16° 45' East.

Retracement of a Portion of the
S. Bdy., T. 7 S., R. 6 W.

Retracement of a Portion of the
S. Bdy., T. 7 S., R. 6 W.

CHAINS

Retracement of the Survey Executed by A. D. Ferron in 1871 and the Resurvey Executed by Ralph Gentry in 1939.

Beginning at the cor. of secs. 2, 3, 34 and 35, on the S. bdy. of the Tp., monumented with an iron post, 2 ins. diam., 12 ins. above ground, with brass cap mkd.

T7S R6W

S34	S35
S3	S2

T8S
1939

S. 89° 43' W., bet. secs. 3 and 34.

Over gently rolling land through sagebrush undergrowth.

22.00 Wash, 15 lks. wide, 5 ft. deep, drains S. 20° E.

40.17 The ¼ sec. cor. of secs. 3 and 34, monumented with an iron post, 1 in. diam., 10 ins. above ground, with brass cap mkd.

1/4 S34
S3
1939

N. 89° 55' W., beginning new measurement.

Asc. 140 ft. over gentle E. slope.

16.10 Trail road, bears nearly N. and S.

26.40 Small wash, drains S. 30° E.; enter timber, bears N. and S.

40.12 The cor. of secs. 3, 4, 33 and 34, monumented with an iron post, 2 ins. diam., 8 ins. above ground, at cor. of fence, bears S. 89° 19' W., and N. 25° E., with brass cap mkd.

T7S R6W

S33	S34
S4	S3

T8S
1939

Land, gently rolling.
Soil, sandy clay.
Timber, medium dense pinon and juniper W. portion; no timber east portion.
Undergrowth, sagebrush.

Dependent Resurvey of a Portion of the
South Boundary, T. 7 S., R. 6 W.

Reestablishment of the Survey Executed by A. D. Ferron in 1871 and the Resurvey Executed by Ralph Gentry in 1939.

81

Dependent Resurvey of a Portion of the S. Bdy., T. 7 S., R. 6 W.

CHAINS	
	S. 89° 49' W., bet. secs. 4 and 33.
	Over rolling land through dense timber; asc. 140 ft. over SE. slope and along N. side of fence.
38.70	Wash, 1.00 ch. wide, 5 ft. deep, drains S. 45° E.; asc. 15 ft. over NE. slope.
40.12	The ¼ sec. cor. of secs. 4 and 33, monumented with a quartzite stone, 12x8x6 ins., firmly set and plainly mkd. ¼ on N. face.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T7S R6W ¼ S33/S4 T8S R6W 1966
	Bury original stone cor. alongside iron post.
	Reestablishment of the Survey Executed by A. J. Stookey in 1899 and the Retracement Executed by H. W. Miller and I. Hayes in 1915.
	S. 89° 58' W., beginning new measurement.
	Continue along N. side of fence; asc. 50 ft. over NE. slope.
3.30	Spur, slopes S. 45° E.; desc. 60 ft. over SW. slope.
24.20	Draw, drains S. 45° E.; asc. 40 ft. over NE. slope.
32.20	Low spur, slopes S. 45° E.; desc. 15 ft. over SW. slope.
39.98	Point for the cor. of secs. 4, 5, 32 and 33 at proportionate bearing and dist.; there is no remaining evidence of the original cor.
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.
	T7S R6W S32 | S33 S5 | S4 T8S R6W 1966
	Cor. is located on E. and W. fence line.
	Land, rolling mountains. Soil, rocky clay. Timber, dense pinon and juniper. Undergrowth, sagebrush.
	N. 89° 57' W., bet. secs. 5 and 32.

CHAINS	
	Over mountainous land through dense timber and along fence line; desc. 15 ft. over SW. slope.
6.10	Wash, 1.00 ch. wide, 6 ft. deep, drains S.; asc. 240 ft. over SE. slope.
12.80	Trail road, bears N. 45° W. and S. 45° E.
39.96	The ¼ sec. cor. of secs. 5 and 32, monumented with a limestone, 15x6x6 ins., firmly set and plainly mkd. ¼ on W. face. This cor. will now function as the S. 1/4 sec. cor. of sec. 32 only.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.
	T7S R6W ¼ S32 T8S R6W 1966
	Bury original stone cor. alongside iron post.
	N. 89° 57' W., beginning new measurement.
	Desc. 30 ft. over NW. slope. Continue along fence line.
0.255	Point for the N. ¼ sec. cor. of sec. 5, T. 8 S., R. 6 W., at midpoint bet. the cor. of secs. 4, 5, 32 and 33 and the closing cor. of secs. 5 and 6.
	Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.
	T7S R6W ¼ S5 T8S R6W 1966
12.00	Draw, drains S. 45° E.; asc. 670 ft. over E. slope.
35.50	Ridge, bears N. and S.; thence along top.
39.47	The cor. of secs. 31 and 32, monumented with a limestone, 16x6x6 ins., firmly set and plainly mkd. 5 notches on E. and 1 on W. edges.
	From which the original bearing trees:
	A juniper, 12 ins. diam., bears N. 85° W., 12 lks. dist., mkd. T7SR6W S31 BT.
	A juniper, 18 ins. diam., bears N. 70° E., 24 lks. dist., mkd. T7SR6W S32 BT.

83

Dependent Resurvey of a Portion of the S. Bdy., T. 7 S., R. 6 W.

CHAINS	
	At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd. T7S R6W S31 | S32 S5 T8S R6W 1966 Bury original stone cor. alongside iron post. Land, mountainous. Soil, rocky loam. Timber, dense juniper. Undergrowth, sagebrush and scattered mahogany.
	S. 89° 43' W., along the S. bdy. of sec. 31. Over mountainous land through dense timber; asc. 40 ft. over gentle E. slope and along fence line.
1.00	The closing cor. of secs. 5 and 6, T. 8 S., R. 6 W., monumented with a limestone, 15x10x6 ins., firmly set and plainly mkd. 5 notches on E. and 1 on W. edges and CC on S. face. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd. T7S R6W S31 S6 | S5 C | C T8S R6W 1966 Bury original stone cor. alongside iron post. Cor. located at cor. of fence, bears N. 89° 43' E. and S.
10.05	Ridge, and divide bet. Rush and Skull Valleys, bears N. and S.; desc. 460 ft. over W. slope.
39.46	Point for the S. ¼ sec. cor. of sec. 31 at proportionate bearing and dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

Dependent Resurvey of a Portion of the S. Bdy., T. 7 S., R. 6 W.

CHAINS

T7S R6W
¼ S31
T8S R6W
1966

S. 89° 34' W., beginning new measurement.

0.41 Point for the N. ¼ sec. cor. of sec. 6, T. 8 S., R. 6 W., at proportionate dist., bet. the closing cor. of secs. 5 and 6, and the closing cor. of T. 8 S., Rs. 6 and 7 W.

Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T7S R6W
¼ S6
T8S R6W
1966

By triangulation; desc. about 200 ft. over W. slope.

13.00 Base of steep descent, bears N. and S.; thence over rolling land.

27.00 Draw, drains S. 45° W.; asc. 50 ft. over SE. slope.

31.31 The closing cor. of T. 8 S., Rs. 6 and 7 W., monumented with an iron post, 3 ins. diam., 18 ins. above ground and in a mound of stone, 3 ft. base, with brass cap mkd.

T7S
R7W | R6W
S36 | S31
S1 C | C
R7W | S6
R6W
T8S
1915

End triangulation.

33.00 Small draw, drains S. 45° W.; asc. 20 ft. over SE. slope.

38.06 The SW. cor. of T. 7 S., R. 6 W., monumented with an iron post, 3 ins. diam., 10 ins. above ground and in a collar of stone, with brass cap mkd.

T7S
R7W | R6W
S36 | S31
S1 | S6
R7W | R6W
T8S
1915

Dependent Resurvey of a Portion of the S. Bdy., T. 7 S., R. 6 W.

CHAINS	
	Land, mountainous. Soil, rocky clay. Timber, medium dense juniper. Undergrowth, sagebrush.
	Dependent Resurvey of the W. Bdy., T. 7 S., R. 6 W.
	Reestablishment of the Survey Executed by A. J. Stookey in 1899.
	From the southwest cor. of T. 7 S., R. 6 W., hereinbefore described,
	N. 0° 11' E., along the W. bdy. of sec. 31.
	Over mountainous land through medium dense juniper timber; asc. 25 ft. over SE. slope.
1.45	Trail road, on ridge, bears nearly E. and W.; desc. 15 ft. over gentle N. slope.
9.25	Trail road, bears nearly E. and W.; asc. 25 ft. over S. slope.
18.55	Spur, slopes W.; desc. 35 ft. over N. slope.
21.45	Draw, drains W.; asc. 110 ft. over S. slope.
32.15	Spur, slopes W.; desc. 20 ft. over N. slope.
38.65	Point for the E. 1/4 sec. cor. of sec. 36, T. 7 S., R. 7 W., at midpoint bet. the SE. cor. of T. 7 S., R. 7 W., and the closing cor. of secs. 25 and 36.
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.
	T7S R7W R6W ¼ S36 1966
40.14	The W. 1/4 sec. cor. of sec. 31, monumented with a limestone, 14x6x6 ins., firmly set and plainly mkd. 1/4 on W. face.
	From which the original bearing tree:
	A juniper, 8 ins. diam., bears S. 23° W., 58 lks. dist., mkd. 1/4S 31BT.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

CHAINS	
	T7S R7W R6W ¼ S31 1966 Bury original stone cor. alongside iron post.
	N. 0° 11' W., beginning new measurement.
	Desc. 165 ft. over N. slope.
14.55	Draw, drains W.; asc. 75 ft. over S. slope.
19.70	Spur, slopes W.; desc. 35 ft. over N. slope.
26.15	Draw, drains W.; asc. 215 ft. over S. slope.
37.85	Spur, slopes S. 30° W.; desc. 25 ft. over NW. slope.
38.97	The closing cor. of secs. 25 and 36, T. 7 S., R. 7 W., monumented with a limestone, 12x10x6 ins., firmly set and plainly mkd. 1 notch on S. and 5 on N. edges and CC on W. face. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd. T7S R7W R6W C S25 C S36 S31 1966 Bury original stone cor. alongside iron post. Desc. 40 ft. over NW. slope.
40.32	The cor. of secs. 30 and 31, monumented with a limestone, 16x10x6 ins., firmly set and plainly mkd. 1 notch on S. and 5 on N. edges. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 5 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd. T7S R7W R6W S30 S25 S31 1966 Bury original stone cor. alongside iron post.

Dependent Resurvey of the W. Bdy.,
T. 7 S., R. 6 W.

CHAINS	
	Land, mountainous. Soil, rocky loam. Timber, medium dense juniper. Undergrowth, sagebrush.
	N. 0° 03' E., along the W. bdy. of sec. 30. Over mountainous land through medium dense timber; desc. 100 ft. over NW. slope.
12.00	Wash, 15 lks. wide, 3 ft. deep, drains S. 45° W.; asc. 55 ft. over SE. slope.
19.30	Spur, slopes S. 80° W.; thence by triangulation; desc. about 100 ft. over N. slope.
32.00	Draw, drains W.; asc. about 40 ft. over S. slope.
37.00	Spur, slopes W. End triangulation; desc. 50 ft. over N. slope.
38.625	Point for the E¼ sec. cor. of sec. 25, T. 7 S., R. 7 W., at midpoint bet. the closing cor. of secs. 25 and 36 and the closing cor. of secs. 24 and 25. Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd. T7S R7W R6W ¼ S25 1966 Desc. 25 ft. over N. slope.
40.03	The W. 1/4 sec. cor. of sec. 30, monumented with a limestone, 16x8x6 ins., firmly set and plainly mkd. 1/4 on W. face. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.

Dependent Resurvey of the W. Bdy.,
T. 7 S., R. 6 W.

CHAINS

T7S

R7W R6W

¼

S30

1966

Bury original stone cor. alongside iron post.

N. 0° 01' W., beginning new measurement.

Desc. 15 ft. over N. slope.

1.30 Wash, in draw, drains W.; asc. 70 ft. over S. slope.

7.40 Spur, slopes W., thence by triangulation; desc. about 100 ft. over N. slope.

25.00 Draw, drains S. 80° W.; asc. about 300 ft. over SE. slope.

38.57 The closing cor. of secs. 24 and 25, T. 7 S., R. 7 W., monumented with a limestone, 12x10x6 ins., firmly set and plainly mkd. 2 notches on S. and 4 on N. edges and CC on W. face. End triangulation.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 15 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T7S

R7W R6W

C S24 S30

C S25

1966

Bury original stone cor. alongside iron post.

39.87 The cor. of secs. 19 and 30, monumented with a limestone, 12x8x3 ins., firmly set and plainly mkd. 2 notches on S. and 4 on N. edges.

From which the original bearing tree:

Dependent Resurvey of the W. Bdy.,
T. 7 S., R. 6 W.

CHAINS	
	A juniper, 15 ins. diam., bears S. 43° E., 150 lks. dist., mkd. T7S R6W S30 BT.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to bedrock, and in a mound of stone, 3½ ft. base to top, with brass cap mkd.
	T7S R7W R6W S24 S19 S30 1966
	Bury original stone cor. alongside iron post.
	Land, mountainous. Soil, rocky clay loam. Timber, medium dense juniper. Undergrowth, sagebrush.
	N. 0° 11' W., along the W. bdy. of sec. 19.
	Over mountainous land through scattered timber; asc. 50 ft. over SW. slope.
2.25	Ridge, bears N. 80° W. and S. 80° E.; thence by triangulation; desc. about 160 ft. over NE. slope.
7.40	Draw, drains N. 45° W.; asc. about 150 ft. over SW. slope.
25.00	Spur, slopes W.; desc. about 150 ft. over N. slope.
33.00	Draw, drains W.; asc. about 185 ft. over S. slope.
38.98	Point for the E.1/4 sec. cor. of sec. 24, T. 7 S., R. 7 W., at midpoint bet. the closing cor. of secs. 24 and 25 and the closing cor. of secs. 13 and 24. End triangulation.
	Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

Dependent Resurvey of the W. Bdy.,
T. 7 S., R. 6 W.

CHAINS

T7S

R7W R6W

¼

S24

1966

39.66 The W. 1/4 sec. cor. of sec. 19, monumented with a limestone, 16x8x6 ins., firmly set and plainly mkd. 1/4 on W. face.

From which the original bearing trees:

A juniper, 12 ins. diam., bears S. 80° E., 12 lks. dist., mkd. 1/4 S19 BT.

A juniper, 15 ins. diam., bears N. 15° W., 36 lks. dist., mkd. 1/4 S24 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 4 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T7S

R7W R6W

¼

S19

1966

Bury original stone cor. alongside iron post.

N. 0° 08' E., beginning new measurement.

Asc. 200 ft. over S. slope.

13.28 Fence, on ridge, bears N. 45° W. and S. 45° E.; desc. 410 ft. over NE. slope.

36.70 Trail road, in draw, bears N. 45° W. and S. 45° E.; asc. 40 ft. over SW. slope.

39.60 The closing cor. of secs. 13 and 24, T. 7 S., R. 7 W., monumented with a sandstone, 18x10x6 ins., firmly set and plainly mkd. 3 notches on N. and S. edges and CC on W. face.

Dependent Resurvey of the W. Bdy.,
T. 7 S., R. 6 W.

CHAINS	
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 16 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.
	T7S R7W R6W C S13 | S19 C S24 1966
	Bury original stone cor. alongside iron post.
40.40	The cor. of secs. 18 and 19, monumented with a sandstone, 20x8x4 ins., firmly set and plainly mkd. 3 notches on N. and S. edges.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.
	T7S R7W R6W S13 | S18 S19 1966
	Bury original stone cor. alongside iron post.
	Land, mountainous. Soil, rocky clay. Timber, scattered juniper. Undergrowth, sagebrush and scattered serviceberry.
	N. 0° 06' E., along the W. bdy. of sec. 18.
	Over mountainous land through scattered juniper timber; desc. 15 ft. over NE. slope.
2.20	Small draw, drains N. 45° W.; asc. 55 ft. over SW. slope.
6.50	Spur, slopes W.; desc. 20 ft. over NW. slope.
9.40	Draw, drains S. 45° W.; asc. 155 ft. over SE. slope.
17.00	Spur, slopes S. 45° W.; desc. 50 ft. over NW. slope.

Dependent Resurvey of the W. Bdy.,
T. 7 S., R. 6 W.

CHAINS

22.40 Draw, drains S. 45° W.; asc. 190 ft. over SE. slope.

28.60 Spur, slopes S. 45° W.; desc. 60 ft. over NW. slope.

37.10 Draw, drains W.; asc. 35 ft. over S. slope.

39.33 Point for the E. 1/4 sec. cor. of sec. 13, T. 7 S., R. 7 W., at midpoint bet. the closing cor. of secs. 13 and 24 and the closing cor. of secs. 12 and 13.

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground, and in a collar of stone, with brass cap mkd.

T7S
R7W R6W
¼
S13
1966

39.81 The W. 1/4 sec. cor. of sec. 18, monumented with a sandstone, 15x12x8 ins., firmly set and plainly mkd. 1/4 on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.

T7S
R7W R6W
¼
S18
1966

Bury original stone cor. alongside iron post.

N. 0° 01' E., beginning new measurement.

Asc. 90 ft. over SE. slope.

5.50 Spur, slopes S. 45° W.; desc. 30 ft. over NW. slope.

9.20 Draw, drains W.; asc. 75 ft. over S. slope.

14.70 Spur, slopes W.; desc. 150 ft. over N. slope.

20.60 Draw, drains N. 45° W.; asc. 210 ft. over SW. slope.

28.30 Spur, slopes W.; desc. 105 ft. over NW. slope.

39.65 The closing cor. of secs. 12 and 13, T. 7 S., R. 7 W., monumented with a limestone, 18x8x8 ins., firmly set and plainly mkd. 4 notches on S. edge and CC on W. face and witnessed with a mound of stone, 2 ft. base, 1 ft. high, W. of cor.

CHAINS	
	Set an iron post, 30 ins. long, 2½ ins. diam., 16 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd. T7S R7W R6W C S12 | S18 C S13 | 1967 Bury original stone cor. alongside iron post.
39.80	Wash, in draw, drains S. 65° W.; asc. 20 ft. over SE. slope.
40.39	The cor. of secs. 7 and 18, monumented with a sandstone, 16x8x3 ins., firmly set and plainly mkd. 4 notches on S. and 2 on N. edges. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd. T7S R7W R6W S12 | S7 S18 1967 Bury original stone cor. alongside iron post. Land, mountainous. Soil, rocky loam. Timber, scattered juniper. Undergrowth, sagebrush and scattered serviceberry.
	N. 0° 05' E., along the W. bdy. of sec. 7. Over mountainous land through scattered timber; asc. 500 ft. over SE. slope.
10.00	Spur, slopes W.; desc. 450 ft. over N. slope.
16.00	Draw, drains W.; asc. 500 ft. over S. slope.
24.90	Ridge, bears E. and W.; desc. 200 ft. over N. slope.
30.00	Draw, drains N. 70° W.; asc. 150 ft. over SW. slope.
37.70	Spur, slopes W.; desc. 15 ft. over NW. slope.
39.345	Point for the E. 1/4 sec. cor. of sec. 12, T. 7 S., R. 7 W., at midpoint bet. the closing cor. of secs. 12 and 13 and the closing cor. of secs. 1 and 12. Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.

Dependent Resurvey of the W. Bdy.,
T. 7 S., R. 6 W.

CHAINS	
	T7S R7W R6W ¼ S12 1967
40.00	Point for the W. 1/4 sec. cor. of sec. 7 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T7S R7W R6W ¼ S7 1967 Desc. 150 ft. over NW. slope.
48.00	Draw, drains S. 60° W.; asc. 700 ft. over steep, rocky SE. slope.
56.15	Ridge, bears N. 70° E. and S. 70° W.; desc. 100 ft. over NW. slope.
65.00	Draw, drains W.; asc. 150 ft. over SW. slope.
79.43	The closing cor. of secs. 1 and 12, T. 7 S., R. 7 W., monumented with a limestone, 16x12x8 ins., firmly set and plainly mkd. 5 notches on S. and 1 on N. edges and CC on W. face. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 15 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd. T7S R7W R6W C S1 S7 C S12 1967 Bury original stone cor. alongside iron post.
80.00	The cor. of secs. 6 and 7, monumented with a limestone, 18x12x6 ins., firmly set and plainly mkd. 5 notches on S. and 1 on N. edges. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd. T7S R7W R6W S1 S6 S7 1967

Dependent Resurvey of the W. Bdy.,
T. 7 S., R. 6 W.

CHAINS	
	Bury original stone cor. alongside iron post. Land, mountainous. Soil, rocky loam. Timber, scattered juniper. Undergrowth, sagebrush.
	N. 0° 01' E., along the W. bdy. of sec. 6. Over mountainous land through widely scattered timber; asc. 200 ft. over steep SW. slope.
7.00	Ridge, bears N. 70° W. and S. 70° E.; desc. 510 ft. over steep NE. slope.
35.00	Draw, drains N. 70° W.; asc. 75 ft. over SW. slope.
40.13	The W. 1/4 sec. cor. of sec. 6, monumented with a limestone, 18x8x6 ins., firmly set in small mound of stone, and plainly mkd. 1/4 on W. face. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd. T7S R7W R6W ¼ S6 1967 Bury original stone cor. alongside iron post.
	N. 1° 05' E., beginning new measurement.
0.16	Point for the E. 1/4 sec. cor. of sec. 1, T. 7 S., R. 7 W., at proportionate dist. bet. the closing cor. of secs. 1 and 12 and the NE. cor. of the Tp. Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd. T7S R7W R6W ¼ S1 1967 Desc. 100 ft. over N. slope.
5.00	Canyon, drains W.; asc. 500 ft. over steep and rocky S. slope.

CHAINS

21.20 Spur, slopes W.; desc. 300 ft. over NW. slope.

31.00 Rocky draw, drains S. 45° W.; asc. 150 ft. over SW. slope.

39.87 The closing cor. of Tps. 6 and 7 S., R. 7 W., monumented with a limestone, 24x12x8 ins., in mound of stone, 2 ft. base, 1 ft. high, and mkd. 3 notches on S. edge. No other visible marks.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T6S	
R7W	T7S
C S36	R6W
C S1	
T7S	
R7W	

1967

Bury original stone cor. in mound of stone, alongside iron post.

41.50 Rocky draw, drains irregularly S.; asc. 20 ft. over SW. slope.

42.23 The cor. of Tps. 6 and 7 S., R. 6 W., monumented with a limestone, 20x8x6 ins., firmly set and plainly mkd. 6 notches on N. and S. edges.

from which

A juniper, 30 ins. diam., bears S. 15° E., 10 lks. dist., mkd. S31 T6S R6W BT.

A juniper, 15 ins. diam., bears S. 5° 30' E., 125 lks. dist., mkd. S6 T7S R6W BT.

(There is no record of these bearing trees.)

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

	T6S
T6S	R6W
R7W	S31
S36	S6
	T7S
	R6W

1967

Bury original stone cor. alongside iron post.

Dependent Resurvey of the West Bdy.,
T. 7 S., R. 6 W.

CHAINS	
	Land, mountainous. Soil, rocky loam. Timber, scattered juniper. Undergrowth, sagebrush.
	Dependent Resurvey of the N. Bdy., T. 7 S., R. 6 W.
	Reestablishment of the Survey Executed by C. L. Craig in 1856.
	From the cor. of Tps. 6 and 7 S., Rs. 5 and 6 W., monumented with an iron post, 3 ins. diam., 12 ins. above ground, with brass cap mkd. T6S R6W R5W S36 | S31 S1 | S6 T7S 1943
	S. 89° 25' W., bet. secs. 1 and 36.
	Over gently rolling land through scattered timber; asc. 95 ft. over gentle NE. slope.
0.40	Wash, 20 lks. wide, 7 ft. deep, drains N. 45° E.
35.30	Enter dense timber, bears N. and S.
40.20	Point for the 1/4 sec. cor. of secs. 1 and 36 at proportionate dist.; there is no remaining evidence of the original cor.
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T6S R6W ¼ S36 S1 T7S R6W 1966
	Raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.
	Asc. 120 ft. over gentle NE. slope.
60.20	Trail road, bears N. and S.
80.40	The cor. of secs. 1, 2, 35 and 36, monumented with a limestone, 26x12x10 ins., firmly set and plainly mkd. 1 notch on E. and 5 on W. edges.

CHAINS

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T6S R6W

S35	S36
S2	S1

T7S R6W

1966

Bury original stone cor. alongside iron post.

Land, gently rolling.
Soil, rocky loam.
Timber, scattered to dense juniper.
Undergrowth, sagebrush.

S. 89° 21' W., bet. secs. 2 and 35.

Over gently rolling land through dense timber; asc. 30 ft. over gentle E. slope.

33.15 Small draw, 15 ft. deep, drains N. 45° E.; asc. 100 ft. over SE. slope.

39.90 Fence, barb wire, bears N. and S.

40.18 Point for the 1/4 sec. cor. of secs. 2 and 35 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T6S R6W

¼ S35 / S2

T7S R6W

1966

Asc. 20 ft. over SE. slope.

52.20 Low spur, slopes N. 45° E.; desc. 15 ft. over NW. slope.

55.40 Draw, drains N. 45° E.; asc. 75 ft. over SE. slope.

68.40 Spur, slopes N. 45° E.; desc. 10 ft. over gentle NW. slope.

80.36 The cor. of secs. 2, 3, 34 and 35, monumented with a cedar post, 3x3 ins. square, 4 ft. long, set in mound of stone. No visible markings but is harmoneously related to existing original cors. and is accepted as the best available evidence of the original cor. point.

Dependent Resurvey of the N. Bdy.,
T. 7 S., R. 6 W.

CHAINS

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.

T6S R6W

S34	S35
S3	S2

T7S R6W

1966

Bury original cedar post alongside iron post.

Land, gently rolling.
Soil, rocky loam.
Timber, dense juniper.
Undergrowth, sagebrush.

S. 89° 28' W., bet. secs. 3 and 34.

Over mountainous land through dense timber; asc. 200 ft. over E. slope.

40.10 The 1/4 sec. cor. of secs. 3 and 34, monumented with a squared cedar post in mound of stone. No visible markings, but is accepted as the best available evidence of the original cor. point.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.

T6S R6W

¼ S34 / S3

T7S R6W

1967

Bury original cedar post alongside iron post.

Reestablishment of the Survey Executed by
A. J. Stookey in 1899.

S. 89° 34' W., beginning new measurement.

Asc. 140 ft. over E. slope.

14.10 Trail road, bears N. 40° E. and S. 80° W., on ridge; asc. 100 ft. along N. slope.

Dependent Resurvey of the N. Bdy.,
T. 7 S., R. 6 W.

CHAINS

39.97 The cor. of secs. 3, 4, 33 and 34, monumented with a sandstone, 20x6x5 ins., firmly set and plainly mkd. 3 notches on E. and W. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T6S R6W

S33	S34
S4	S3

T7S R6W

1967

Bury original stone cor. alongside iron post.

Raise a mound of stone, 3½ ft. base, 1½ ft. high, W. of cor.

Land, mountainous.
Soil, rocky clay loam.
Timber, dense juniper and scattered pinon.
Undergrowth, sagebrush.

S. 89° 46' W., bet. secs. 4 and 33.

Over mountainous land through dense timber; asc. 80 ft. along N. slope.

39.98 The 1/4 sec. cor. of secs. 4 and 33, monumented with a limestone, 20x12x8 ins., firmly set and plainly mkd. 1/4 on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to bedrock, and in a mound of stone, 3½ ft. base to top, with brass cap mkd.

T6S R6W

¼	S33
	S4

T7S R6W

1967

Bury original stone cor. alongside iron post.

S. 89° 57' W., beginning new measurement.

Asc. 800 ft. over E. slope.

Dependent Resurvey of the N. Bdy.,
T. 7 S., R. 6 W.

CHAINS	
39.71	The cor. of secs. 4, 5, 32 and 33, monumented with a limestone, 18x10x4 ins., firmly set and plainly mkd. 4 notches on E. and 2 on W. edges, and witnessed by a small mound of stone to W. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 3½ ft. base to top, with brass cap mkd. T6S R6W S32 | S33 S5 | S4 T7S R6W 1967 Bury original stone cor. in mound of stone alongside iron post. Land, mountainous. Soil, rocky loam. Timber, dense juniper and scattered pinon. Undergrowth, sagebrush and scattered young mahogany.
	N. 89° 57' W., bet. secs. 5 and 32. Over mountainous land through dense juniper and scattered pinon and pine timber; asc. 480 ft. over NE. slope.
18.80	Ledgy spur, slopes S. 45° E.; asc. 40 ft. over SE. slope.
26.10	Ledge, 20 ft. high, bears N. 15° E. and S. 15° W.
28.40	Ridge and divide bet. Rush and Skull Valleys, bears N. and S.; desc. 170 ft. over SW. slope.
31.20	Leave timber, bears N. 45° W. and S. 45° E.
39.59	Point for the 1/4 sec. cor. of secs. 5 and 32 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 4 ins. in the ground to bedrock, and in a mound of stone, 5 ft. base to top, with brass cap mkd. T6S R6W ¼ S32 / S5 T7S R6W 1967 From which, U.S.G.S. triangulation station "Stookey," bears N. 11° 19' 30" E., 19.944 chs. dist. Desc. 110 ft. over SW. slope.

Dependent Resurvey of the N. Bdy.,
T. 7 S., R. 6 W.

CHAINS	
52.35	Head of Two Springs Canyon, drains S. 25° E.; asc. 280 ft. over NE. slope.
66.40	Ridge, bears N. and S.; desc. 430 ft. over steep SW. slope.
79.18	Point for the cor. of secs. 5, 6, 31 and 32 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd. T6S R6W S31 | S32 S6 | S5 T7S R6W 1967 Land, mountainous. Soil, rocky clay loam. Timber, dense juniper and scattered pinon, pine and mohogany E. portion; no timber W. portion. Undergrowth, sagebrush and buckbrush.
	N. 89° 57' W., bet. secs. 6 and 31. Over mountainous land through dense undergrowth; desc. 500 ft. over steep SW. slope.
20.00	Head of draw, drains S.; asc. 150 ft. over SE. slope.
28.40	Spur, slopes S. 20° W.; desc. 375 ft. over NW. slope.
37.30	Draw, drains S. 65° W.; asc. 100 ft. over SE. slope.
39.59	Point for the 1/4 sec. cor. of secs. 6 and 31 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 3½ ft. base to top, with brass cap mkd. T6S R6W ¼ S31 / S6 T7S R6W 1967 Cor. located on small spur, slopes S. 60° W. Desc. 140 ft. along S. slope. Enter scattered timber.
51.25	Spur, slopes S. 60° W.; desc. 200 ft. over NW. slope.
58.00	Draw, drains irregularly W.; thence along draw.

Dependent Resurvey of the N. Bdy.,
T. 7 S., R. 6 W.

CHAINS	
61.30	Leave draw, drains S. 50° W.; asc. 20 ft. over SE. slope.
66.00	Top of ascent, slopes S.; desc. 220 ft. over SW. slope.
76.38	The cor. of Tps. 6 and 7 S., R. 6 W., hereinbefore described.
	Land, mountainous. Soil, rocky loam. Timber, scattered juniper W. portion; no timber E. portion. Undergrowth, sagebrush and serviceberry.

Dependent Resurvey of the Subdivision,
T. 7 S., R. 6 W.

Reestablishment of the Survey Executed
by A. D. Ferron in 1871.

From the cor. of secs. 1, 2, 35 and 36, on the S. bdy. of the Tp., monumented with an iron post, 2 ins. diam., 12 ins. above ground, with brass cap mkd.

T7S R6W
S35|S36
S2|S1
T8S
1939

N. 0° 13' W., bet. secs. 35 and 36.

Over gently rolling land through dense undergrowth.

7.60	Trail road, bears N. 45° W. and S. 45° E.
39.78	The 1/4 sec. cor. of secs. 35 and 36, monumented with a sandstone, 12x10x6 ins., firmly set and plainly mkd. 1/4 on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T7S R6W
¼
S35|S36
1966

Bury original stone cor. alongside iron post.

Raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

CHAINS	
	N. 0° 13' E., beginning new measurement.
	Asc. 60 ft. over gently rolling land.
10.60	Wash, 10 lks. wide, 4 ft. deep, drains S. 45° E.
23.40	Trail road, bears N. 45° W. and S. 45° E.
40.59	The cor. of secs. 25, 26, 35 and 36, monumented with a limestone, 14x9x8 ins., firmly set and plainly mkd. 1 notch on S. and E. edges.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T7S R6W S26 | S25 S35 | S36 1966
	Bury original stone cor. alongside iron post.
	Raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor.
	Land, gently rolling. Soil, sandy. No timber. Undergrowth, dense sagebrush.
	From the cor. of secs. 25, 30, 31 and 36, on the E. bdy. of the Tp., monumented with an iron post, 2 ins. diam., 6 ins. above ground, with brass cap mkd.
	T7S R6W R5W S25 | S30 S36 | S31 1944
	S. 89° 31' W., bet. secs. 25 and 36.
	Over gently rolling land through dense undergrowth.
27.90	Wash, 20 lks. wide, 3 ft. deep, drains irregularly E.
40.46	The 1/4 sec. cor. of secs. 25 and 36, monumented with a limestone, 8x6x4 ins., firmly set and plainly mkd. 1/4 on N. face.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 16 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

CHAINS	
	T7S R6W ¼ S25 S36 1966 Bury original stone cor. alongside iron post.
	S. 89° 41' W., beginning new measurement.
40.28	The cor. of secs. 25, 26, 35 and 36. Land, gently rolling. Soil, sandy. No timber. Undergrowth, dense sagebrush.
	N. 0° 09' E., bet. secs. 25 and 26. Over gently rolling land through dense undergrowth.
8.20	Trail road, bears N. 45° E. and S. 45° W.
15.90	Enter timber, bears E. and W.
28.40	Wash, 10 lks. wide, 3 ft. deep, drains S. 45° E.
40.03	The 1/4 sec. cor. of secs. 25 and 26, monumented with a limestone, 23x13x8 ins., firmly set and plainly mkd. 1/4 on W. face. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T7S R6W ¼ S26 | S25 1966 Bury original stone cor. alongside iron post. Raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor.
	N. 0° 09' E., beginning new measurement.
12.50	Trail road, bears N. 45° W. and S. 45° E.
19.60	Wash, 5 lks. wide, 3 ft. deep, drains E.
27.20	Wash, 20 lks. wide, 6 ft. deep, in Faust Canyon, drains E.
35.40	Trail road, bears E. and W. to Faust Canyon.

Dependent Resurvey of the Subdivision,
T. 7 S., R. 6 W.

CHAINS

40.07 The cor. of secs. 23, 24, 25 and 26, monumented with a limestone, 13x12x7 ins., firmly set and plainly mkd. 2 notches on S. and 1 on E. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T7S R6W

S23 | S24
S26 | S25

1966

Bury original stone cor. alongside iron post.

Raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor.

Land, gently rolling.
Soil, rocky loam.
Timber, scattered juniper.
Undergrowth, sagebrush.

From the cor. of secs. 19, 24, 25 and 30, on the E. bdy. of the Tp., monumented with an iron post, 2 ins. diam., 8 ins. above ground, with brass cap mkd.

T7S
R6W R5W

S24 | S19
S25 | S30

1944

S. 89° 07' W., bet. secs. 24 and 25.

Over gently rolling land through sagebrush undergrowth.

39.00 Trail road, bears N. and S.

40.38 Point for the 1/4 sec. cor. of secs. 24 and 25 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 16 ins. in the ground, and in a mound of stone, 3½ ft. base to top, with brass cap mkd.

T7S R6W

¼ S24
S25

1966

80.76 The cor. of secs. 23, 24, 25 and 26.

Dependent Resurvey of the Subdivision,
T. 7 S., R. 6 W.

CHAINS	
	Land, gently rolling. Soil, rocky loam. Timber, scattered juniper W. portion. Undergrowth, sagebrush.
	N. 0° 05' E., bet. secs. 23 and 24.
	Over gently rolling land through medium dense timber; desc. 40 ft. along E. slope.
2.70	Wash, 5 lks. wide, 1 ft. deep, drains E.
38.75	Trail road, bears N. 45° W. and S. 45° E.
40.12	The 1/4 sec. cor. of secs. 23 and 24, monumented with a limestone, 10x6x4 ins., firmly set and plainly mkd. 1/4 on W. face.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.
	T7S R6W ¼ S23 | S24 1966
	Bury original stone cor. alongside iron post.
	N. 0° 06' E., beginning new measurement.
1.00	Wash, 15 lks. wide, 5 ft. deep, drains E.; asc. 100 ft. over SE. slope.
2.70	Trail road, bears N. 45° W. and S. 45° E.
4.40	Wash, 15 lks. wide, 6 ft. deep, drains S. 45° E.
40.14	The cor. of secs. 13, 14, 23 and 24, monumented with a limestone, 18x12x6 ins., firmly set and plainly mkd. 3 notches on S. and 1 on E. edges.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground, and in a mound of stone, 3½ ft. base to top, with brass cap mkd.
	T7S R6W S14 | S13 S23 | S24 1966
	Bury original stone cor. alongside iron post.

CHAINS	
	Land, gently rolling. Soil, rocky clay loam. Timber, medium dense juniper. Undergrowth, sagebrush.
	From the cor. of secs. 13, 18, 19 and 24, on the E. bdy. of the Tp., monumented with an iron post, 2 ins. diam., 6 ins. above ground, with brass cap mkd. T7S R6W R5W S13 | S18 S24 | S19 1944 S. 88° 55' W., bet. secs. 13 and 24. Over gently rolling land through sagebrush undergrowth; asc. 95 ft. over gentle SE. slope.
29.65	Wash, 5 lks. wide, 1 ft. deep, drains S. 45° E.
39.90	Trail road, bears N. and S.
40.20	Point for the 1/4 sec. cor. of secs. 13 and 24 at proportionate dist., there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, with brass cap mkd. T7S R6W ¼ S13/S24 1966 Bury a cedar post, 6 ins. diam., 6 ft. long, 2 ft. in the ground, N. of cor. Asc. 165 ft. over SE. slope.
53.40	Enter medium dense timber, bears N. and S.
80.40	The cor. of secs. 13, 14, 23 and 24. Land, gently rolling. Soil, gravelly clay. Timber, medium dense juniper W. portion. Undergrowth, sagebrush.
	N. 0° 07' E., bet. secs. 13 and 14. Over gently rolling land through scattered timber.
27.00	Trail road, bears nearly E. and W.
30.90	Wash, 25 lks. wide, 4 ft. deep, drains E.

CHAINS	
33.03	Fence, net wire, bears nearly E. and W.
33.60	Wash, 30 lks. wide, 10 ft. deep, drains E. about 3.00 chs. to junction with wash draining about N. 85° E.
40.10	The 1/4 sec. cor. of secs. 13 and 14, monumented with a limestone, 12x8x6 ins., firmly set and plainly mkd. 1/4 on W. face.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground, and in a collar of stone, with brass cap mkd.
	T7S R6W ¼ S14|S13 1966
	Bury original stone cor. alongside iron post.
	N. 0° 08' E., beginning new measurement.
10.15	Wash, 10 lks. wide, 3 ft. deep, drains E.
14.00	Wash, 15 lks. wide, 5 ft. deep, drains E.
20.05	Trail road, bears N. 45° W. and S. 45° E.
22.75	Small draw, drains E.
32.25	Wash, 5 lks. wide, 1 ft. deep, drains E.
39.15	Wash, 5 lks. wide, 2 ft. deep, drains E.
40.08	The cor. of secs. 11, 12, 13 and 14, monumented with a limestone, 20x12x8 ins., firmly set and plainly mkd. 4 notches on S. and 1 on E. edges.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground, and in a collar of stone, with brass cap mkd.
	T7S R6W S11|S12 S14|S13 1966
	Bury original stone cor. alongside iron post.
	Land, gently rolling. Soil, rocky loam. Timber, scattered juniper. Undergrowth, sagebrush.

Dependent Resurvey of the Subdivision,
T. 7 S., R. 6 W.

CHAINS

From the cor. of secs. 7, 12, 13 and 18, on the E. bdy. of the Tp., monumented with an iron post, 2 ins. diam., 10 ins. above ground, with brass cap mkd.

T7S
R6W R5W

S12	S7
S13	S18

1944

S. 88° 31' W., bet. secs. 12 and 13.

Over gently rolling land through scattered timber; asc. 170 ft. over E. slope.

1.75 Trail road, bears N. 45° E. and S. 45° W.

39.86 Point for the 1/4 sec. cor. of secs. 12 and 13 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground, and in a collar of stone, with brass cap mkd.

T7S R6W

¼ S12
S13

1966

Asc. 185 ft. over gentle E. slope.

79.72 The cor. of secs. 11, 12, 13 and 14.

Land, gently rolling.
Soil, rocky loam.
Timber, scattered juniper.
Undergrowth, sagebrush.

N. 0° 13' E., bet. secs. 11 and 12.

Over gently rolling land through scattered timber; asc. 50 ft. over SE. slope.

3.90 Wash, 15 lks. wide, 6 ft. deep, drains E.

20.00 Spur, slopes E.; desc. 120 ft. over NE. slope.

40.22 The 1/4 sec. cor. of secs. 11 and 12, monumented with a limestone, 16x12x9 ins., firmly set and plainly mkd. 1/4 on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.

CHAINS	
	T7S R6W ¼ S11 | S12 1966 Bury original stone cor. alongside iron post.
	N. 0° 03' W., beginning new measurement.
	Asc. 20 ft. along gently rolling E. slope.
16.20	Wash, 10 lks, wide, 2 ft. deep, drains E.
40.41	The cor. of secs. 1, 2, 11 and 12, monumented with a limestone, 20x12x9 ins., firmly set and plainly mkd. 5 notches on S. and 1 on E. edges.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.
	T7S R6W S2 | S1 S11 | S12 1966
	Bury original stone cor. alongside iron post.
	Land, gently rolling. Soil, rocky loam. Timber, scattered juniper. Undergrowth, sagebrush.
	From the cor. of secs. 1,6, 7 and 12, on the E. bdy. of the Tp., monumented with an iron post, 2 ins. diam., 6 ins. above ground, with brass cap mkd.
	T7S R6W R5W S1 | S6 S12 | S7 1944
	S. 88° 01' W., bet. secs. 1 and 12.
	Over gently rolling land through scattered timber; asc. 100 ft. over gentle E. slope.
39.28	The 1/4 sec. cor. of secs. 1 and 12, monumented with a limestone, 12x10x7 ins., firmly set and plainly mkd. 1/4 on N. face.
	At the cor. point

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground, and in a collar of stone, with brass cap mkd.

T7S R6W
¼ S1/S12
1966

Bury original stone cor. alongside iron post.

S. 89° 16' W., beginning new measurement.

Asc. 150 ft. over gentle E. slope.

40.13 The cor. of secs. 1, 2, 11 and 12.

Land, gently rolling.
Soil, rocky loam.
Timber, scattered to medium dense juniper.
Undergrowth, sagebrush.

N. 1° 03' W., bet. secs. 1 and 2.

Over gently rolling land through medium dense timber.

11.20 Wash, in small draw, drains N. 45° E.

25.90 Trail road, bears N. 45° E. and S. 45° W.

28.10 Wash, 10 lks. wide, 2 ft. deep, drains E.

40.39 Point for the 1/4 sec. cor. of secs. 1 and 2 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.

T7S R6W
¼
S2|S1
1966

44.20 Wash, 10 lks. wide, 3 ft. deep, drains E.

81.68 The cor. of secs. 1, 2, 35 and 36, on the N. bdy. of the Tp., hereinbefore described.

Land, gently rolling.
Soil, rocky loam.
Timber, medium dense juniper.
Undergrowth, sagebrush.

CHAINS	
	From the cor. of secs. 2, 3, 34 and 35, on the S. bdy. of the Tp., hereinbefore described.
	N. 0° 04' W., bet. secs. 34 and 35.
	Over nearly level land through sagebrush undergrowth.
29.30	Wash, 10 lks. wide, 3 ft. deep, drains S. 45° E.
40.16	The 1/4 sec. cor. of secs. 34 and 35, monumented with a limestone, 12x8x4 ins., firmly set and plainly mkd. 1/4 on W. face.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.
	T7S R6W ¼ S34 | S35 1966
	Bury original stone cor. alongside iron post.
	N. 0° 02' E., beginning new measurement.
30.60	Trail road, bears N. 45° E. and S. 45° W.
39.88	The cor. of secs. 26, 27, 34 and 35, monumented with a limestone, 12x10x5 ins., firmly set and plainly mkd. 1 notch on S. and 2 on E. edges.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.
	T7S R6W S27 | S26 S34 | S35 1966
	Bury original stone cor. alongside iron post.
	Land, nearly level. Soil, rocky loam. No timber. Undergrowth, sagebrush.
	From the cor. of secs. 25, 26, 35 and 36.
	S. 89° 29' W., bet. secs. 26 and 35.

Dependent Resurvey of the Subdivision,
T. 7 S., R. 6 W.

CHAINS	
	Over gently rolling land through sagebrush undergrowth; asc. 90 ft. over gentle SE. slope.
5.95	Trail road, bears N. and S.
34.60	Trail road, bears S. 86° E. and N. 88° W.
34.80	Wash, 20 lks. wide, 5 ft. deep, drains S. 45° E.
40.21	Point for the 1/4 sec. cor. of secs. 26 and 35 at proportionate dist.; there is no remaining evidence of the original cor.
	Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd. T7S R6W ¼ S26/S35 1966
	Asc. 50 ft. over gentle SE. slope.
42.35	Trail road, bears N. 85° E. and S. 85° W.
58.25	Same trail road, bears S. 85° E. and N. 85° W.
61.65	Trail road, bears N. 45° E. and S. 45° W.
80.42	The cor. of secs. 26, 27, 34 and 35.
	Land, gently rolling. Soil, rocky loam. No timber. Undergrowth, sagebrush.
	N. 0° 05' W., bet. secs. 26 and 27.
	Over gently rolling land through sagebrush undergrowth.
8.00	Enter scattered timber, bears E. and W.
12.00	Trail road, bears S. 45° E. and N. 45° W.
40.00	The 1/4 sec. cor. of secs. 26 and 27, monumented with a limestone, 15x10x5 ins., firmly set and plainly mkd. 1/4 on W. face.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd. T7S R6W ¼ S27|S26 1966

CHAINS	
	Bury original stone cor. alongside iron post.
	N. 0° 35' W., beginning new measurement.
	Enter dense timber.
34.35	Trail road, bears N. 45° W. and S. 45° E.
39.99	Point for the cor. of secs. 22, 23, 26 and 27 at proportionate dist.; there is no remaining evidence of the original cor.
	Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.
	T7S R6W S22 | S23 S27 | S26 1966
	Land, gently rolling. Soil, rocky loam. Timber, dense juniper N. portion; scattered S. portion. Undergrowth, sagebrush.
	From the cor. of secs. 23, 24, 25 and 26.
	S. 89° 24' W., bet. secs. 23 and 26.
	Over gently rolling land through sagebrush undergrowth; asc. 30 ft. over gentle E. slope.
20.00	Top of ascent, bears N. and S.; desc. 60 ft. over gentle W. slope.
35.60	Enter dense timber, bears N. and S.
40.54	Point for the 1/4 sec. cor. of secs. 23 and 26 at proportionate dist.; there is no remaining evidence of the original cor.
	Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground, and in a collar of stone, with brass cap mkd.
	T7S R6W ¼ S23 S26 1966
	Asc. 155 ft. over gentle E. slope.
53.75	Dirt road, bears S. 45° E. and N. 45° W. to Faust Canyon.

Dependent Resurvey of the Subdivision,
T. 7 S.; R. 6 W.

CHAINS	
77.20	Wash, 15 lks. wide, 4 ft. deep, in Faust Canyon, drains S. 45° E.
81.08	The cor. of secs. 22, 23, 26 and 27.
	Land, gently rolling. Soil, sandy loam. Timber, dense juniper W. portion. Undergrowth, sagebrush.

Reestablishment of the Survey Executed
by A. J. Stookey in 1899.

	N. 0° 13' E., bet. secs. 22 and 23.
	Over gently rolling land through dense timber; asc. 40 ft. over SE. slope.
1.60	Fence, barb wire, bears N. 25° E. and S. 25° W.
5.80	Wash, 20 lks. wide, 4 ft. deep, in Faust Canyon, drains S. 50° E.
11.98	Road, bears S. 45° E. and N. 45° W. to Faust Canyon.
13.60	Spur, slopes E.; desc. 40 ft. over N. slope.
25.30	Bottom of descent, bears E. and W.
32.20	Wash, 10 lks. wide, 3 ft. deep, drains S. 45° E.; asc. 100 ft. over SW. slope.
39.99	The 1/4 sec. cor. of secs. 22 and 23, monumented with a limestone, 14x6x6 ins., firmly set and plainly mkd. 1/4 on W. face.
	From which the original bearing trees:
	A juniper, 6 ins. diam., bears N. 5° E., 12 lks. dist., mkd. 1/4S 23BT.
	A juniper, 12 ins. diam., bears S. 15° W., 14 lks. dist., mkd. 1/4S 22BT.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T7S R6W
¼
S22|S23
1966

Bury original stone cor. alongside iron post.

Dependent Resurvey of the Subdivision,
T. 7 S., R. 6 W.

CHAINS	
	N. 0° 08' W., beginning new measurement.
	Asc. 125 ft. over SW. slope.
14.50	Spur, slopes E.; desc. 60 ft. over N. slope.
20.65	Wash, 20 lks. wide, 1 ft. deep, drains S. 45° E.
24.20	Wash, 15 lks. wide, 3 ft. deep, drains S. 45° E.; asc. 160 ft. over SW. slope.
34.60	Spur, slopes S. 15° E.; desc. 30 ft. over NE. slope.
39.88	The cor. of secs. 14, 15, 22 and 23, monumented with a limestone, 16x8x8 ins., firmly set and plainly mkd. 3 notches on S. and 2 on E. edges.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.
	T7S R6W S15 | S14 S22 | S23 1966
	Bury original stone cor. alongside iron post.
	Land, gently rolling. Soil, rocky loam. Timber, dense juniper and scattered pinon. Undergrowth, sagebrush.
	From the cor. of secs. 13, 14, 23 and 24.
	S. 88° 19' W., bet. secs. 14 and 23.
	Over gently rolling land through dense timber; asc. 160 ft. over E. slope.
14.60	Wash, 10 lks. wide, 2 ft. deep, drains S. 45° E.
41.22	The 1/4 sec. cor. of secs. 14 and 23, monumented with a sandstone, 15x6x6 ins., firmly set and plainly mkd. 1/4 on N. face.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T7S R6W ¼ S14 S23 1966
	Bury original stone cor. alongside iron post.
	Raise a mound of stone, 3 ft. base, 1½ ft. high, N. of cor.

CHAINS	
	S. 89° 53' W., beginning new measurement.
	Desc. 5 ft. over SW. slope.
0.56	Fence, barb wire, bears N. and S.
6.40	Draw, drains S. 45° E.; asc. 140 ft. over NE. slope.
19.10	Ridge, bears N. 45° W. and S. 45° E.; desc. 5 ft. over SW. slope.
23.90	Draw, drains S. 80° E.; asc. 220 ft. over NE. slope.
39.88	The cor. of secs. 14, 15, 22 and 23.
	Land, rolling. Soil, rocky loam. Timber, dense juniper and scattered pinon. Undergrowth, sagebrush.
	N. 0° 09' W., bet. secs. 14 and 15.
	Over rolling land through dense timber; desc. 20 ft. over NE. slope.
4.00	Draw, drains S. 80° E.; asc. 20 ft. over S. slope.
29.40	Ridge, bears E. and W.; desc. 160 ft. over N. slope.
40.77	The 1/4 sec. cor. of secs. 14 and 15, monumented with a sandstone, 14x10x4 ins., firmly set and plainly mkd. 1/4 on W. face.
	From which the original bearing tree:
	A juniper, 11 ins. diam., bears S. 80° W., 45 lks. dist., mkd. 1/4 S15 BT.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T7S R6W S15 | S14 1966
	Bury original stone cor. alongside iron post.
	Raise a mound of stone, 3 ft. base, 1½ ft. high, W. of cor.
	N. 0° 08' W., beginning new measurement.
	By triangulation; desc. about 10 ft. over N. slope.
0.50	Wash, 10 lks. wide, 2 ft. deep, drains E.; asc. about 30 ft. over S. slope.
7.00	Ridge, bears E. and W.; desc. about 30 ft. over N. slope.

Dependent Resurvey of the Subdivision,
T. 7 S., R. 6 W.

CHAINS	
10.50	Draw, drains S. 45° E.; asc. about 185 ft. over SW. slope.
40.40	The cor. of secs. 10, 11, 14 and 15, monumented with a limestone, 15x7x6 ins., firmly set and plainly mkd. 4 notches on S. and 2 on E. edges. End triangulation. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd. T7S R6W S10 | S11 S15 | S14 1966 Bury original stone cor. alongside iron post. Land, rolling. Soil, rocky loam. Timber, dense juniper and scattered pinon. Undergrowth, sagebrush.
	From the cor. of secs. 11, 12, 13 and 14. S. 89° 41' W., bet. secs. 11 and 14. Over rolling land through scattered timber; asc. 340 ft. along N. slope.
29.90	Top of ascent, bears E. and W.; desc. 10 ft. along S. slope.
37.10	Draw, drains S. 45° E.; asc. 10 ft. over NE. slope.
40.50	Fence, barb wire, bears nearly N. and S.
40.91	The 1/4 sec. cor. of secs. 11 and 14, monumented with a limestone, 15x12x8 ins., firmly set and plainly mkd. 1/4 on N. face. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T7S R6W ¼ S11 S14 1966 Bury original stone cor. alongside iron post. Raise a mound of stone, 3½ ft. base, 1½ ft. high, N. of cor. --- S. 89° 41' W., beginning new measurement.

Dependent Resurvey of the Subdivision,
T. 7 S., R. 6 W.

CHAINS	
	Asc. 445 ft. over NE. slope.
19.70	Ridge, bears N. 45° W. and S. 45° E.; desc. 70 ft. over SW. slope.
40.00	Draw, drains S. 45° E.; asc. 20 ft. over SE. changing to S. slope.
40.58	The cor. of secs. 10, 11, 14 and 15.
	Land, rolling. Soil, rocky clay loam. Timber, scattered to dense juniper and scattered pinon. Undergrowth, sagebrush.
	N. 0° 12' W., bet. secs. 10 and 11.
	Over rolling land through dense timber. By triangulation asc. 5 ft. over S. slope.
1.00	Top of ascent, slopes E.; desc. 10 ft. over NE. slope.
2.30	Draw, drains S. 45° E.; asc. about 175 ft. over SW. slope.
13.65	Ridge, bears nearly E. and W.; desc. about 175 ft. over N. slope.
27.00	Draw, drains N. 45° E.; asc. about 190 ft. over SE. slope.
37.00	Ridge, bears N. 60° E. and S. 60° W. End triangulation; desc. 80 ft. over NW. slope.
40.30	The 1/4 sec. cor. of secs. 10 and 11, monumented with a limestone, 18x12x7 ins., firmly set and plainly mkd. 1/4 on W. face.
	From which the original bearing trees:
	A juniper, 12 ins. diam., bears S. 37° E., 129 lks. dist., mkd. 1/4 S11 BT.
	A juniper, 18 ins. diam., bears S. 85° E., 90 lks. dist., mkd. 1/4 S11 BT.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 14 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.
	T7S R6W ¼ S10|S11 1966
	Bury original stone cor. alongside iron post.
	N. 0° 14' W., beginning new measurement.

Dependent Resurvey of the Subdivision,
T. 7 S., R. 6 W.

CHAINS	
	By triangulation; desc. about 80 ft. over NW. slope.
4.50	Draw, drains nearly E.; asc. about 80 ft. over S. slope.
36.00	Ridge, bears nearly E. and W. End triangulation; desc. 6 ft. over N. slope.
40.63	The cor. of secs. 2, 3, 10 and 11, monumented with a limestone, 12x8x7 ins., firmly set and plainly mkd. 5 notches on S. and 2 on E. edges.
	From which the original bearing trees:
	A juniper, 10 ins. diam., bears S. 1° W., 10 lks. dist., mkd. T7SR6W S10 BT.
	A juniper, 8 ins. diam., bears N. 30° W., 25 lks. dist., mkd. T7SR6W S3 BT.
	A juniper, 15 ins. diam., bears N. 58° E., 37 lks. dist., mkd. T7SR6W S2 BT.
	A juniper, 8 ins. diam., bears S. 35° E., 30 lks. dist., mkd. T7SR6WS11BT.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 14 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.
	T7S R6W S3 | S2 S10 | S11 1966
	Bury original stone cor. alongside iron post.
	Land, rolling. Soil, clay loam. Timber, dense juniper. Undergrowth, sagebrush.
	From the cor. of secs. 1, 2, 11 and 12.
	S. 89° 57' W., bet. secs. 2 and 11.
	Over rolling land through dense timber. By triangulation asc. about 80 ft. along S. slope.
40.40	Fence, barb wire, bears N. and S. End triangulation.
41.05	Point for the 1/4 sec. cor. of secs. 2 and 11 at proportionate dist.; there is no remaining evidence of the original cor.

Dependent Resurvey of the Subdivision,
T. 7 S., R. 6 W.

CHAINS	
	Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground, and in a mound of stone, 3½ ft. base to top, with brass cap mkd. T7S R6W ¼ S2/S11 1966
46.60	Wash, 10 lks. wide, 2 ft. deep, drains N. 45° E.; asc. 75 ft. over SE. slope.
58.60	Ridge, bears N. 45° E. and S. 45° W. Thence by triangulation; desc. about 80 ft. over NW. slope.
62.10	Draw, drains N.; asc. about 80 ft. over E. slope.
66.00	Spur, slopes N.; desc. about 40 ft. over W. slope.
69.10	Draw, drains N.; asc. about 60 ft. over E. slope.
73.10	Spur, slopes N.; desc. about 60 ft. over W. slope.
76.10	Draw, drains N.; asc. about 60 ft. over E. slope.
81.10	Spur, slopes N.; desc. 10 ft. along N. slope. End triangulation.
82.10	The cor. of secs. 2, 3, 10 and 11.
	Land, rolling. Soil, rocky loam. Timber, dense juniper. Undergrowth, sagebrush.
	N. 0° 11' E., bet. secs. 2 and 3.
	Over mountainous land through dense timber; desc. 80 ft. over N. slope.
12.00	Draw, drains E.; asc. 80 ft. over S. slope.
21.10	Ridge, bears N. 60° E. and S. 60° W.; desc. 75 ft. over NW. slope.
27.00	Draw, drains N. 45° E.; asc. 30 ft. over SE. slope.
31.00	Spur, slopes N. 45° E.; desc. 30 ft. over NW. slope.
39.73	The 1/4 sec. cor. of secs. 2 and 3, monumented with a limestone, 16x12x5 ins., firmly set and plainly mkd. 1/4 on W. face.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

Dependent Resurvey of the Subdivision,
T. 7 S., R. 6 W.

CHAINS	
	T7S R6W ¼ S3|S2 1966
	from which
	A juniper, 12 ins. diam., bears S. 30° W., 45 lks. dist., mkd. 1/4 S3 BT.
	Bury original stone cor. alongside iron post.
	Raise a mound of stone, 3 ft. base, 1½ ft. high, W. of cor.
	N. 0° 31' E., beginning new measurement.
	Desc. 20 ft. over NW. slope.
2.00	Draw, drains N. 60° E.; asc. 30 ft. over SE. slope.
6.20	Spur, slopes E.; desc. 60 ft. over N. slope.
8.00	Draw, drains E.; asc. 15 ft. over S. slope.
11.50	Spur, slopes E.; desc. 60 ft. over N. slope.
24.00	Draw, drains E.; asc. 80 ft. over S. slope.
38.60	Spur, slopes N. 45° E.; desc. 35 ft. over NE. slope.
41.27	The cor. of secs. 2, 3, 34 and 35, on the N. bdy. of the Tp., hereinbefore described.
	Land, mountainous. Soil, rocky clay. Timber, dense juniper. Undergrowth, sagebrush.
	From the cor. of secs. 3, 4, 33 and 34, on the S. bdy. of the Tp., hereinbefore described.
	N. 0° 15' W., bet. secs. 33 and 34.
	Over mountainous land through dense timber; asc. 90 ft. over gentle SE. slope.
19.00	Top of ascent, slopes E.; desc. 30 ft. over NE. slope.
25.60	Draw, drains S. 70° E.; asc. 40 ft. over SW. slope.
30.00	Trail road, bears irregularly S. 40° E. and N. 40° W.
39.95	The 1/4 sec. cor. of secs. 33 and 34, monumented with a limestone, 15x10x8 ins., firmly set and plainly mkd. 1/4 on W. face, and witnessed by a small mound of stone to W.
	From which the original bearing trees:

Dependent Resurvey of the Subdivision,
T. 7 S., R. 6 W.

CHAINS

A juniper, 6 ins. diam., bears N. 54° E., 24 lks. dist., mkd. 1/4 S34 BT. (Record N. 68° E., 24 lks.)

A juniper stump, 6 ins. diam., bears S. 70° W., 38 lks. dist.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T7S R6W
¼
S33|S34
1966

Bury original stone cor. alongside iron post.

Rebuild mound of stone, 3 ft. base, 1½ ft. high, W. of cor.

N. 0° 15' W., beginning new measurement.

Asc. 175 ft. over SE. slope.

5.25 Wash, 15 lks. wide, 3 ft. deep, drains S. 25° E.

40.01 The cor. of secs. 27, 28, 33 and 34, monumented with a limestone, 15x8x6 ins., firmly set and plainly mkd. 1 notch on S. and 3 on E. edges, with mound of stone to W.

From which the original bearing trees:

A juniper, 10 ins. diam., bears N. 15° W., 11 lks. dist., mkd. S28 T7S R6W BT. (Record N. 85° W., 20 lks.)

A juniper, 18 ins. diam., bears N. 45° E., 70 lks. dist., mkd. S27 T7SR6W BT.

A juniper, 6 ins. diam., bears S. 35° E., 12 lks. dist., mkd. S34 T7S R6W BT.

A juniper, 10 ins. diam., bears S. 85° W., 23 lks. dist., mkd. S33 T7S R6W BT. (No record of this BT.)

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground to bedrock, and in a mound of stone, 3½ ft. base to top, with brass cap mkd.

T7S R6W
S28|S27
S33|S34
1966

Bury original stone cor. alongside iron post.

CHAINS	
	From this cor., a limestone, 22x12x8 ins., set in a mound of stone, 2½ ft. base, and plainly mkd. 1 notch on S. and 3 nothces on E. edges, bears S. 80° 42' E., 2.91 chs. dist. From this limestone, a juniper, 12 ins. diam., bears S. 85° E., 14 lks. dist., mkd. BT and other illegible scribe marks, and a juniper, 15 ins. diam., bears S. 45° E., 20 lks. dist., mkd. BT only. This does not agree with the original record and is not harmoniously related with existing original corners, and I do not accept this as being an official corner. Land, mountainous. Soil, rocky loam. Timber, dense juniper and scattered pinon. Undergrowth, sagebrush.
	From the cor. of secs. 26, 27, 34 and 35. S. 89° 43' W., bet. secs. 27 and 34. Over rolling land through dense sagebrush; asc. 80 ft. over SE. slope.
18.20	Enter dense timber, bears N. and S.
37.70	Wash, 10 lks. wide, 2 ft. deep, drains S. 60° E.; asc. 15 ft. over NE. slope.
40.50	Point for the 1/4 sec. cor. of secs. 27 and 34 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 15 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd. T7S R6W ¼ S27/S34 1966 Asc. 175 ft. over NE. changing to SE. slope.
40.55	Fence, barb wire, bears N. 25° E. and S. 25° W.
81.00	The cor. of secs. 27, 28, 33 and 34. Land, rolling to mountainous. Soil, rocky clay loam. Timber, dense juniper and scattered pinon. Undergrowth, sagebrush.
	N. 0° 15' E., bet. secs. 27 and 28. Over mountainous land through dense timber; asc. 40 ft. over SE. slope.

CHAINS	
10.30	Top of ascent, slopes E.; desc. 15 ft. over NE. slope.
13.80	Draw, drains S. 45° E.; asc. 80 ft. over SW. slope.
16.80	Spur, slopes S. 45° E.; desc. 15 ft. over NE. slope.
19.80	Draw, drains S. 45° E.; asc. 15 ft. along E. slope.
40.05	The 1/4 sec. cor. of secs. 27 and 28, monumented with a limestone, 15x6x6 ins., firmly set and plainly mkd. 1/4 on W. face.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground, and in a collar of stone, with brass cap mkd.
	T7S R6W ¼ S28 | S27 1967
	Bury original stone cor. alongside iron post.
	N. 0° 09' E., beginning new measurement.
	Asc. 30 ft. along E. slope.
9.70	Spur, slopes E.; thence by triangulation; desc. about 50 ft. over NE. slope.
24.50	Trail road, bears nearly E. and W.
28.50	Draw, drains E.; asc. about 60 ft. over S. slope.
31.50	Ridge, bears E. and W. End triangulation; desc. 80 ft. over N. slope.
37.50	Draw, drains E.; asc. 50 ft. over S. slope.
39.58	The cor. of secs. 21, 22, 27 and 28, monumented with a limestone, 15x6x6 ins., firmly set and plainly mkd. 2 notches on S. and 3 on E. edges.
	From which the original bearing tree:
	A juniper, 12 ins. diam., bears N. 2° E., 27 lks. dist., mkd. T7S R6W S22 BT.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.
	T7S R6W S21 | S22 S28 | S27 1967

Dependent Resurvey of the Subdivision,
T. 7 S., R. 6 W.

CHAINS	
	Bury original stone cor. alongside iron post. Land, mountainous. Soil, rocky clay loam. Timber, dense juniper and scattered pinon. Undergrowth, sagebrush.
	From the cor. of secs. 22, 23, 26 and 27. S. 88° 57' W., bet. secs. 22 and 27. Over rolling land through dense timber; asc. 100 ft. over SE. slope.
0.35	Fence, barb wire, bears N. 25° E. and S. 25° W.
6.85	Trail road, bears N. 45° W. and S. 45° E.
40.26	The 1/4 sec. cor. of secs. 22 and 27, monumented with a limestone, 20x12x8 ins., firmly set and plainly mkd. 1/4 on N. face. From which the original bearing trees: A juniper, 12 ins. diam., bears N. 10 lks. dist., mkd. 1/4 S22 BT. A juniper, 24 ins. diam., bears S. 45° E., 15 lks. dist., mkd. 1/4 S27 BT. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T7S R6W ¼ S22/S27 1966 Bury original stone cor. alongside iron post. Raise a mound of stone, 3 ft. base, 1½ ft. high, N. of cor. --- S. 89° 49' W., beginning new measurement. By triangulation; asc. about 100 ft. over SE. slope.
4.50	Trail road, bears N. 45° W. and S. 45° E.
11.40	Trail road, bears N. 85° W. and S. 85° E.
40.15	The cor. of secs. 21, 22, 27 and 28. Land, rolling. Soil, rocky clay loam. Timber, dense juniper. Undergrowth, sagebrush.

MAINS	
	N. 0° 03' E., bet. secs. 21 and 22.
	Over mountainous land through dense timber; asc. 100 ft. over SE. slope.
15.90	Spur, slopes S. 50° E.; desc. 60 ft. over NE. slope.
25.25	Draw, drains S. 65° E., asc. 60 ft. over SW. slope.
31.22	Trail road, bears N. 75° W. and S. 75° E., on ridge; desc. 90 ft. over NE. slope.
38.50	Draw, drains E., asc. 45 ft. over S. slope.
39.83	The 1/4 sec. cor. of secs. 21 and 22, monumented with a limestone, 16x14x12 ins., firmly set and plainly mkd. 1/4 on W. face.
	From which the original bearing trees:
	A juniper, 14 ins. diam., bears West, 45 lks. dist., mkd. 1/4 S21 BT.
	A juniper, 14 ins. diam., bears S. 80° E., 32 lks. dist., mkd. 1/4 S22 BT.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.
	T7S R6W ¼ S21 | S22 1967
	Bury original stone cor. alongside iron post.
	N. 0° 40' E., beginning new measurement.
	Asc. 40 ft. over S. slope.
1.50	Ridge, bears E. and W., thence by triangulation, desc. about 50 ft. over N. slope.
5.80	Draw, drains E.; asc. about 50 ft. over S. slope.
12.50	Ridge, bears E. and W.; desc. about 40 ft. over N. slope.
14.40	Draw, drains E., asc. 20 ft. over S. slope.
21.50	Top of ascent; desc. 30 ft. over N. slope.
30.75	Ridge, bears E. and W.; desc. 10 ft. over N. slope.
33.15	Dirt road, in Faust Canyon, bears N. 45° W. and S. 45° E.

Dependent Resurvey of the Subdivision,
T. 7 S., R. 6 W.

CHAINS	
34.00	Creek, 5 lks. wide, 6 ins. deep, in Faust Canyon, flows S. 45° E.; asc. about 30 ft. over SW. slope.
40.11	The cor. of secs. 15, 16, 21 and 22, monumented with a limestone, 15x10x8 ins., firmly set and plainly mkd. 3 notches on S. and E. edges. End triangulation.

From which the original bearing trees:

A juniper, 30 ins. diam., bears N. 1° E., 47 lks. dist., mkd. T7S R6W S15 BT.

A juniper, 18 ins. diam., bears N. 35° W., 26 lks. dist., mkd. T7S R6W S16 BT.

A juniper, 24 ins. diam., bears N. 60° W., 68 lks. dist., mkd. T7S R6W S16 BT.

A juniper, 12 ins. diam., bears N. 25° W., 79 lks. dist., mkd. T7S R6W S16 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T7S R6W

S16	S15
S21	S22

1967

Bury original stone cor. in mound of stone, alongside iron post.

Land, mountainous.
Soil, rocky clay.
Timber, dense juniper and scattered pinon.
Undergrowth, sagebrush.

From the cor. of secs. 14, 15, 22 and 23.

S. 88° 48' W., bet. secs. 15 and 22.

Over rolling land through dense timber. By triangulation desc. about 30 ft. over SW. slope.

CHAINS	
5.70	Draw, drains S. 15° E.; asc. about 30 ft. over NE. slope.
7.70	Spur, slopes S. 45° E.; desc. about 60 ft. over SW. slope.
9.70	Draw, drains S. 15° E. from N. 50° W.; asc. about 60 ft. over NE. slope.
27.40	Ridge, bears N. and S. End triangulation; desc. 70 ft. over W. slope.
36.80	Draw, drains S.; asc. 40 ft. over E. slope.

Dependent Resurvey of the Subdivision,
T. 7 S., R. 6 W.

CHAINS	
40.80	The 1/4 sec. cor. of secs. 15 and 22, monumented with a sandstone, 15x8x6 ins., firmly set and plainly mkd. 1/4 on N. face. From which the original bearing trees: A juniper, 18 ins. diam., bears N. 80° E., 35 lks. dist., mkd. 1/4 S15 BT. A juniper, 18 ins. diam., bears N. 83° W., 20 lks. dist., mkd. 1/4 S15 BT. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd. T7S R6W ¼ S15/S22 1967 Bury original stone cor. alongside iron post.
	N. 89° 54' W., beginning new measurement. Desc. 40 ft. over W. slope.
5.10	Draw, drains S.; asc. 20 ft. over E. slope.
9.10	Ridge, bears N. and S.; desc. 30 ft. over W. slope.
13.10	Draw, drains S.; asc. 30 ft. over E. slope.
16.10	Ridge, bears N. and S.; desc. 20 ft. over W. slope.
39.10	The cor. of secs. 15, 16, 21 and 22. Land, rolling. Soil, rocky clay loam. Timber, dense juniper. Undergrowth, sagebrush.
	N. 0° 02' E., bet. secs. 15 and 16. Over mountainous land through dense timber; asc. 30 ft. over SW. slope.
2.00	Spur, slopes S. 45° W.; desc. 50 ft. over NW. slope.
5.30	Draw, drains S. 45° W.; asc. 60 ft. over SE. slope.
20.00	Ridge, bears N. 45° E. and S. 45° W.; desc. 20 ft. over NW. slope.
35.00	Draw, drains S. 45° W.; asc. 60 ft. over SE. slope.

CHAINS	
39.83	The 1/4 sec. cor. of secs. 15 and 16, monumented with a sandstone, 18x10x6 ins., firmly set and plainly mkd. 1/4 on W. face. From which the original bearing trees: A juniper, 14 ins. diam., bears N. 45° E., 31 lks. dist., mkd. 1/4 S15 BT. A juniper, 24 ins. diam., bears N. 45° W., 28 lks. dist., mkd. 1/4 S16 BT. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground to bedrock, and in a mound of stone, 3½ ft. base to top, with brass cap mkd. T7S R6W ¼ S16 | S15 1967 Bury original stone cor. alongside iron post.
	N. 0° 13' W., beginning new measurement. Asc. 20 ft. over SE. slope.
6.00	Ridge, bears S. 45° W. and N. 45° E.; desc. about 40 ft. over NW. slope.
15.50	Hollow, drains S. 45° W.; asc. about 60 ft. over SE. slope.
23.50	Ridge, bears S. 45° W. and N. 45° E.; desc. about 40 ft. over NW. slope.
32.00	Hollow, drains S. 30° W.; asc. about 30 ft. along SW. slope.
40.08	The cor. of secs. 9, 10, 15 and 16, monumented with a limestone, 15x8x6 ins., firmly set and plainly mkd. 4 notches on S. and 3 on E. edges. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground, and in a mound of stone, 3½ ft. base to top, with brass cap mkd. T7S R6W S9 | S10 S16 | S15 1967 Bury original stone cor. alongside iron post. Land, mountainous. Soil, rocky. Timber, dense juniper and pinon. Undergrowth, sagebrush and widely scattered mahogany.

CHAINS

From the cor. of secs. 10, 11, 14 and 15.

S. 87° 35' W., bet. secs. 10 and 15.

Over mountainous land through widely scattered timber and dense sagebrush undergrowth; asc. 140 ft. over SE. slope.

9.10 Top of high ridge, bears S. 15° W. and N. 15° E.; desc. 200 ft. over NW. slope.

17.40 Hollow, drains S. 20° W.; asc. 50 ft. over SE. slope.

19.30 Top of small ridge, bears nearly N. and S.; desc. 20 ft. over SW. slope.

24.50 Hollow, drains S. 35° E.; asc. 300 ft. over NE. slope.

36.00 Top of rocky ridge, bears N. 45° E. and S. 45° W.; desc. 30 ft. over NW. slope.

40.12 The 1/4 sec. cor. of secs. 10 and 15, monumented with a limestone, 15x8x6 ins., firmly set and plainly mkd. 1/4 on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T7S R6W
¼ S10
S15
1967

Bury original stone cor. alongside iron post.

S. 89° 36' W., beginning new measurement.

Desc. 15 ft. over NW. slope.

7.80 Hollow, drains N. 55° E.; asc. 360 ft. over SE. slope.

14.20 Low rocky ridge, bears N. 45° E. and S. 45° W.; asc. 200 ft. over NE. slope.

38.90 Top of ridge, divide between Faust Canyon and Grasshopper Canyon, bears S. 25° E. and N. 25° W.; desc. 20 ft. over SW. slope.

39.96 The cor. of secs. 9, 10, 15 and 16.

Land, mountainous.
Soil, rocky.
Timber, widely scattered juniper and pinon.
Undergrowth, sagebrush.

CHAINS	
	N. 0° 09' E., bet. secs. 9 and 10.
	Over mountainous land through dense timber; asc. 20 ft. over SW. slope.
1.80	Top of divide between Faust Canyon and Grasshopper Canyon, bears S. 25° E. and N. 25° W.; desc. 200 ft. over NE. slope.
6.50	Hollow, drains S. 45° E.; asc. 300 ft. over S. slope.
11.00	Top of divide between Faust Canyon and Two Spring Canyon, bears E. and W.; desc. 300 ft. over NW. slope.
40.11	The 1/4 sec. cor. of secs. 9 and 10, monumented with a limestone, 15x8x7 ins., firmly set and plainly mkd. 1/4 on W. face.
	From which the original bearing tree:
	A juniper, 24 ins. diam., bears N. 38° W., 1.43 chs. dist., mkd. 1/4 S9 BT.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground to bedrock, and in a mound of stone, 3½ ft. base to top, with brass cap mkd.
	T7S R6W ¼ S9 | S10 1967
	Bury original stone cor. alongside iron post.
	N. 0° 03' W., beginning new measurement.
	Desc. 500 ft. over NE. slope.
40.40	The cor. of secs. 3, 4, 9 and 10, monumented with a limestone, 18x13x6 ins., firmly set and plainly mkd. 5 notches on S. and 3 on E. edges.
	From which the original bearing tree:
	A juniper, 24 ins. diam., bears S. 28° E., 12 lks. dist., mkd. T7S R6W S10 BT.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 15 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.
	T7S R6W S4 | S3 S9 | S10 1967
	from which
	A juniper, 3 ins. diam., bears N. 40° E., 3½ lks. dist., mkd. BT only.

Dependent Resurvey of the Subdivision,
T. 7 S., R. 6 W.

CHAINS

A juniper, 5 ins. diam., bears S. 47° W., 12½ lks. dist., mkd. T7S R6W S9 BT.

Bury original stone cor. alongside iron post.

Land, mountainous.
Soil, rocky.
Timber, scattered juniper and pinon.
Undergrowth, sagebrush.

From the cor. of secs. 2, 3, 10 and 11.

S. 88° 02' W., bet. secs. 3 and 10.

Over mountainous land through dense timber. By triangulation; desc. 50 ft. over NW. slope.

4.10 Draw, drains N. 15° E.; asc. 30 ft. over E. slope.

10.00 Spur, slopes N.; desc. 50 ft. over SW. slope.

17.00 Draw, drains N. 15° W.; asc. 30 ft. over NE. slope.

20.60 Spur, slopes N. 30° W.; desc. 150 ft. over NW. slope.

22.60 Draw, drains N. 40° W.; asc. 300 ft. over SE. slope.

39.65 The 1/4 sec. cor. of secs. 3 and 10, monumented with a limestone, 15x8x4 ins., firmly set and plainly mkd. 1/4 on N. face.

From which the original bearing trees:

A juniper, 15 ins. diam., bears N. 35° 45' E., 19 lks. dist., mkd. 1/4 S3 BT. (Record N. 40° E., 9 lks. dist.)

A juniper, 8 ins. diam., bears S. 21° 15' E., 41 lk dist., mkd. 1/4 S3 BT. (Record N. 45° W., 7 lks. dist.)

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T7S R6W
¼ S3
S10
1967

Bury original stone cor. alongside iron post.

S. 88° 20' W., beginning new measurement.

Dependent Resurvey of the Subdivision,
T. 7 S., R. 6 W.

CHAINS	
	Asc. 10 ft. over SE. slope.
0.05	Ridge, bears N. 40° W. and S. 40° E.; desc. about 250 ft. over SW. slope.
13.90	Draw, drains N. 40° W.; asc. 25 ft. over NE. slope.
20.00	Spur, slopes N. 30° W.; desc. about 75 ft. over W. slope.
25.00	Draw, drains N.; asc. about 200 ft. over E. slope. End triangulation.
39.95	The cor. of secs. 3, 4, 9 and 10.
	Land, mountainous. Soil, rocky. Timber, dense juniper and pinon. Undergrowth, sagebrush.
	N. 0° 01' E., bet. secs. 3 and 4.
	Over mountainous land, through dense timber. By triangulation; desc. 200 ft. over NE. slope.
20.00	Draw, drains N. 70° E.; asc. 100 ft. over S. slope.
28.00	Spur, slopes E.; desc. 150 ft. over N. slope.
39.00	Bottom of South Fork of Two Spring Canyon, stream 4 lks. wide, 4 ins. deep, flows E.; asc. 30 ft. over S. slope.
39.90	The 1/4 sec. cor. of secs. 3 and 4, monumented with a limestone, 24x10x6 ins., firmly set and plainly mkd. 1/4 on W. face.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.
	T7S R6W ¼ S4 | S3 1967
	Bury original stone cor. alongside iron post.
	N. 0° 08' W., beginning new measurement.
	Asc. 50 ft. over S. slope.
7.90	Spur, slopes E.; desc. 50 ft. over NE. slope.
14.60	Bottom of North Fork of Two Spring Canyon, drains S. 75° E.; asc. 150 ft. over S. slope.

Dependent Resurvey of the Subdivision,
T. 7 S., R. 6 W.

CHAINS

24.10 Ridge, bears E. and W.; desc. 100 ft. over N. slope.

33.10 Trail road, bears nearly E. and W. End triangulation.

43.13 The cor. of secs. 3, 4, 33 and 34, on the N. bdy. of Tp., hereinbefore described.

Land, mountainous.
Soil, rocky.
Timber, dense juniper and pinon.
Undergrowth, sagebrush.

From the cor. of secs. 4, 5, 32 and 33, on the S. bdy. of the Tp., monumented with an iron post, 2½ ins. diam., hereinbefore described.

N. 0° 09' E., bet. secs. 32 and 33.

Over mountainous land, through scattered timber; asc. 150 ft. over SE. slope.

20.50 Spur, slopes S. 75° E.; desc. 60 ft. over NE. slope.

33.80 Wash, 5 lks. wide, 2 ft. deep, drains S. 26° E.; asc. 160 ft. over SE. slope.

39.72 The 1/4 sec. cor. of secs. 32 and 33, monumented with a limestone, 15x6x6 ins., firmly set and plainly mkd. 1/4 on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T7S R6W
¼
S32|S33
1967

Bury original stone cor. alongside iron post.

N. 0° 06' W., beginning new measurement.

By triangulation; asc. 30 ft. over S. slope.

6.50 Spur, slopes S. 80° E.; desc. about 20 ft. over NE. slope.

8.30 Wash, 15 lks. wide, 3 ft. deep, drains E.; asc. 50 ft. over SE. slope.

14.30 Spur, slopes S. 82° E.; desc. about 40 ft. over NE. slope.

CHAINS	
20.30	Wash, 15 lks. wide, 2 ft. deep, drains S. 60° E.; asc. about 200 ft. over SW. slope.
39.86	The cor. of secs. 28, 29, 32 and 33, monumented with a limestone, 16x8x5 ins., firmly set and plainly mkd. 1 notch on S. and 4 notches on E. edges. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 16 ins. in the ground, and in a mound of stone, 4 ft. base to top, with brass cap mkd. T7S R6W S29 | S28 S32 | S33 1967 Bury original stone cor. alongside iron post. Land, mountainous. Soil, rocky. Timber, scattered juniper and pinon. Undergrowth, sagebrush.
	From the cor. of secs. 27, 28, 33 and 34. S. 89° 30' W., bet. secs. 28 and 33. Over mountainous land, through dense timber. By triangulation; asc. about 100 ft. over E. slope.
7.00	Wood road, bears S. 45° E. and N. 45° W.
39.53	The ¼ sec. cor. of secs. 28 and 33, monumented with a limestone, 20x14x10 ins., firmly set and plainly mkd. 1/4 on N. face. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground, and in a mound of stone, 3½ ft. base to top, with brass cap mkd. T7S R6W ¼ S28 S33 1967 Bury original stone cor. alongside iron post. --- S. 89° 45' W., beginning new measurement. Asc. 350 ft. over NE. slope.
12.70	Ridge, bears S. 45° E. and N. 45° W.; desc. about 100 ft. over SW. slope.

CHAINS	
27.50	Hollow, drains S.; asc. about 300 ft. over E. slope.
37.30	Top of rocky point, projects S.; desc. 50 ft. over SW. slope.
39.50	The cor. of secs. 28, 29, 32 and 33.
	Land, mountainous. Soil, rocky. Timber, dense juniper and pinon. Undergrowth, sagebrush.
	N. 0° 07' E., bet. secs. 28 and 29.
	Over mountainous land, through dense timber. By triangulation; desc. 220 ft. over NW. slope.
7.00	Wash, 10 lks. wide, 5 ft. deep, drains S. 75° E.; asc. 300 ft. over S. slope.
17.80	Ridge, bears S. 75° E. and N. 75° W., end triangulation; desc. 260 ft. over N. slope.
29.20	Wash, 10 lks. wide, 6 ft. deep, drains S. 85° E.; asc. 100 ft. over S. slope.
39.58	The ¼ sec. cor. of secs. 28 and 29, monumented with a limestone, 18x12x8 ins., firmly set and plainly mkd. 1/4 on W. face.
	From which the original bearing tree:
	A juniper, 15 ins. diam., bears S. 85° E., 115 lks. dist.; (Record East 116 lks. dist.)
	Other bearing tree destroyed.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground, and in a mound of stone, 3½ ft. base to top, with brass cap mkd.
	T7S R6W ¼ S29 | S28 1967
	Bury original stone cor. alongside iron post.
	N. 0° 01' W., beginning new measurement.
	Asc. 225 ft. over S. slope. Leave timber, bears E. and W.

Dependent Resurvey of the Subdivision,
T. 7 S., R. 6 W.

CHAINS	
7.20	Ridge, bears N. 87° W. and S. 87° E. By triangulation; desc. 400 ft. over N. slope.
17.50	Hollow, drains E.; asc. 400 ft. over S. slope.
39.20	Ridge, bears S. 75° E. and N. 75° W. End triangulation; desc. 20 ft. over N. slope.
39.97	The cor. of secs. 20, 21, 28 and 29, monumented with a limestone, 15x9x8 ins., firmly set and plainly mkd 4 notches on E. and 2 on S. edges. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T7S R6W S20 | S21 S29 | S28 1967 Bury original stone cor. alongside iron post. Raise a mound of stone, 3 ft. base, 1½ ft. high, W. of cor. Land, mountainous. Soil, rocky. Timber, dense juniper and pinon S. portion, scattered N. portion. Undergrowth, sagebrush.
	From the cor. of secs. 21, 22, 27 and 28. S. 89° 40' W., bet. secs. 21 and 28. Desc. 20 ft. over SW. slope.
3.80	Hollow, drains S. 50° E.; asc. 375 ft. over NE. slope.
33.00	Ridge, bears N. and S.; desc. 25 ft. over NW. slope.
39.72	The 1/4 sec. cor. of secs. 21 and 28, monumented with a quartzite stone, 18x6x6 ins., firmly set and plainly mkd. 1/4 on N. face. From which the original bearing tree: A juniper, 8 ins. diam., bears N. 30° W., 60 lks. dist., mkd. 1/4 S21 BT. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

Dependent Resurvey of the Subdivision,
T. 7 S., R. 6 W.

CHAINS

T7S R6W

¼ S21/S28

1967

Bury original stone cor. alongside iron post.

Raise a mound of stone, 3 ft. base, 1½ ft. high, N. of cor.

S. 89° 34' W., beginning new measurement.

Desc. 25 ft. over NW. slope.

1.25 Hollow, drains N. 30° E. for 2.00 chs.; thence N. 45° E., leave dense timber; asc. 580 ft. over E. slope.

22.40 Spur, slopes N. 55° E.; desc. 10 ft. over NW. slope.

30.70 Hollow, drains N.; asc. 145 ft. over NE. slope.

39.43 The cor. of secs. 20, 21, 28 and 29.

Land, mountainous.
Soil, rocky.
Timber, dense juniper and pinon.
Undergrowth, sagebrush.

N. 0° 09' E., bet. secs. 20 and 21.

Over mountainous land, through scattered timber and dense sagebrush; desc. 240 ft. over N. slope.

8.30 Hollow, drains N. 70° E.; asc. 135 ft. over SE. slope.

17.10 Ridge, bears N. 60° E. and S. 60° W.; desc. 75 ft. over NW. slope.

20.80 Hollow, drains N. 40° E.; asc. 30 ft. over SE. slope.

31.80 Ridge, bears N. 30° E. and S. 30° W.; desc. 180 ft. over N. slope.

39.50 Hollow, drains N. 45° E.; asc. 15 ft. over SE. slope.

40.01 The 1/4 sec. cor. of secs. 20 and 21, monumented with a limestone, 18x10x8 ins., firmly set and plainly mkd. 1/4 on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground, and in a mound of stone, 3½ ft. base to top, with brass cap mkd.

T7S R6W

¼

S20|S21

1967

Dependent Resurvey of the Subdivision,
T. 7 S., R. 6 W.

CHAINS	
	Bury original stone cor. alongside iron post.
	N. 0° 03' E., beginning new measurement.
	Asc. 10 ft. over SE. slope.
0.70	Ridge, bears N. 70° E. and S. 70° W.; desc. 30 ft. over NW. slope.
2.00	Hollow, drains E.; asc. 110 ft. over SE. slope.
11.10	Ridge, bears N. 70° E. and S. 70° W.; desc. 210 ft. over NW. slope.
26.75	Hollow, drains N. 60° E.; asc. 70 ft. over SE. slope.
31.50	Point of spur, slopes E.; desc. 20 ft. over NE. slope.
34.45	Hollow, drains S. 60° E.; asc. 80 ft. over SW. slope.
40.55	The cor. of secs. 16, 17, 20 and 21, monumented with a limestone, 15x10x6 ins., firmly set and plainly mkd. 3 notches on S. and 4 on E. edges.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground, and in a mound of stone, 3½ ft. base to top, with brass cap mkd.
	T7S R6W S17 | S16 S20 | S21 1967
	Bury original stone cor. alongside iron post.
	Land, mountainous. Soil, rocky. Timber, scattered juniper and pinon. Undergrowth, thick sagebrush.
	From the cor. of secs. 15, 16, 21 and 22.
	N. 89° 53' W., bet. secs. 16 and 21.
	Over mountainous land through dense timber. By triangulation; desc. 75 ft. over SW. slope.
6.20	Faust Canyon Creek (dry), drains S. 45° E.; asc. 75 ft. over NE. slope.
7.90	Unimproved dirt road, bears S. 45° E. and N. 45° W.
10.40	Leave bottom of Faust Canyon, bears S. 45° E. and N. 45° W.

CHAINS

39.79 The 1/4 sec. cor. of secs. 16 and 21, monumented with a limestone, 18x10x6 ins., firmly set and plainly mkd. 1/4 on N. face.

From which the original bearing trees:

A juniper, 10 ins. diam., bears S. 75° E., 147 lks. dist., mkd. 1/4 S21 BT.

A juniper, 10 ins. diam., bears S. 60° W., 40 lks. dist., mkd. 1/4 S21 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T7S R6W

¼ S16/S21

1967

Bury original stone cor. alongside iron post.

Raise a mound of stone, 3½ ft. base, 1½ ft. high, N. of cor.

N. 89° 50' W., beginning new measurement.

Asc. 200 ft. over NE. slope.

27.90 Ridge, bears S. 50° E. and N. 50° W.; desc. 75 ft. over W. slope.

33.90 Bottom of saddle, on ridge, bears E. and W.; asc. 75 ft. over NE. slope.

39.88 The cor. of secs. 16, 17, 20 and 21.

Land, mountainous
Soil, rocky.
Timber, dense juniper and pinon.
Undergrowth, sagebrush.

N. 0° 21' E., bet. secs. 16 and 17.

Over mountainous land, through scattered timber; desc. 130 ft. over NW. slope.

10.10 Hollow, drains N. 50° E.; asc. 10 ft. over SE. slope.

11.20 Point of spur, slopes N. 75° E.; desc. 10 ft. over NW. slope.

12.20 Hollow, drains S. 75° E. and connects with hollow at 10.10 chs., 3.00 chs. E. of line; asc. 80 ft. over NW. slope.

CHAINS	
20.90	Spur, slopes N. 60° E.; desc. 150 ft. over N. slope.
31.40	Hollow, drains E.; asc. 160 ft. over S. slope.
39.89	The 1/4 sec. cor. of secs. 16 and 17, monumented with a limestone, 18x8x6 ins., firmly set and plainly mkd. 1/4 on W. face. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground, and in a mound of stone, 4 ft. base to top, with brass cap mkd. T7S R6W ¼ S17|S16 1967 Bury original stone cor. alongside iron post.
	N. 0° 01' E., beginning new measurement. Asc. 20 ft. over S. slope.
2.20	Rocky ridge, bears E. and W.; desc. 180 ft. over N. slope.
9.80	Hollow, drains N. 70° E.; asc. 10 ft. over S. slope.
17.70	Ridge, 2.00 chs. W. of saddle, bears E. and W.; desc. 180 ft. over NE. slope.
25.40	Trail road, bears S. 60° E. and N. 60° W.
26.20	Small spring branch in bottom of hollow, drains S. 80° E. asc. 100 ft. over SE. slope.
34.60	Point of spur, slopes E.; desc. 10 ft. over NE. slope.
39.00	Hollow, drains S. 50° E.; asc. 25 ft. over SW. slope.
40.11	The cor. of secs. 8, 9, 16 and 17, monumented with a limestone, 18x7x6 ins., firmly set and plainly mkd. 4 notches on S. and E. edges. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground, and in a mound of stone, 3½ ft. base to top, with brass cap mkd. T7S R6W S8|S9 S17|S16 1967

CHAINS	
	Bury original stone cor. alongside iron post. Land, mountainous. Soil, rocky. Timber, scattered juniper and pinon. Undergrowth, sagebrush.
	From the cor. of secs. 9, 10, 15 and 16. N. 89° 41' W., bet. secs. 9 and 16. Over mountainous land through dense timber. By triangulation; desc. 40 ft. over SW. slope.
9.10	Hollow, drains S. 45° W.; asc. 100 ft. over SE. slope.
18.10	Ridge, bears S. 40° W. and N. 40° E.; desc. 75 ft. over NW. slope.
27.60	Hollow, drains S. 40° W.; asc. 100 ft. over SE. slope.
34.10	Ridge, bears S. 30° W. and N. 30° E.; desc. 60 ft. over NW. slope. End triangulation.
39.34	The 1/4 sec. cor. of secs. 9 and 16, monumented with a sandstone, 15x6x6 ins., firmly set and plainly mkd. 1/4 on N. face. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground, and in a mound of stone, 3½ ft. base to top, with brass cap mkd. T7S R6W ¼ S9/S16 1967 Bury original stone cor. alongside iron post.
	N. 89° 46' W., beginning new measurement. By triangulation; desc. 60 ft. over NW. slope.
2.70	Hollow, drains S. 30° W.; asc. about 125 ft. over SE. slope.
5.70	Ridge, bears S. 30° W. and N. 30° E.; desc. about 100 ft. over W. slope.
11.70	Hollow, drains S.; asc. about 150 ft. over E. slope.
14.70	Ridge, bears N. and S.; desc. about 125 ft. over SW. slope.

CHAINS	
22.70	Bottom of Faust Canyon, drains S. 45° E.; asc. about 180 ft. over NE. slope.
29.70	Ridge, bears S. 45° E. and N. 45° W.; desc. about 100 ft. over SW. slope.
34.70	Hollow, drains S. 45° E.; asc. about 150 ft. over SE. slope. End triangulation.
39.74	The cor. of secs. 8, 9, 16 and 17.
	Land, mountainous. Soil, rocky. Timber, dense juniper and pinon. Undergrowth, sagebrush.
	N. 0° 03' E., bet. secs. 8 and 9.
	Over mountainous land through dense timber; asc. 60 ft. over SE. slope.
4.10	Ridge, bears E. and W.; desc. 40 ft. along E. slope.
23.50	Unimproved dirt road, bears N. 20° W. and S. 20° E. Enter bottom of Faust Canyon; asc. 80 ft. along E. slope.
31.95	Hydrant on pipeline, bears E., 1.00 chs. dist.
35.55	Jeep road, bears S. 5° E. and N. 5° W.
39.90	Wash, 40 lks. wide, 4 ft. deep, with trail road in bottom, drains S. 65° E., 2.00 chs. into main wash.
40.45	The 1/4 sec. cor. of secs. 8 and 9, monumented with a limestone, 15x6x6 ins., firmly set and plainly mkd. 1/4 on W. face. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone to top, with brass cap mkd. T7S R6W ¼ S8|S9 1967 Bury original stone cor. alongside iron post.
	N. 0° 20' E., beginning new measurement.
0.50	Faust Canyon Creek (dry), drains S. 45° E.; asc. 100 ft. along W. slope.
1.00	Underground stock water pipeline, bears N. 66° 20' W., 13.50 chs. to spring and curves S. 45° E.

Dependent Resurvey of the Subdivision,
T. 7 S., R. 6 W.

CHAINS

27.20 Ridge, bears S. 70° E. and N. 70° W.; desc. 40 ft. over NE. slope.

30.40 Hollow, drains N. 75° E.; asc. 20 ft. over SE. slope.

35.80 Ridge, bears N. 65° E. and S. 65° W.; desc. 70 ft. over N. slope.

40.26 The cor. of secs. 4, 5, 8 and 9, monumented with a limestone, 15x10x6 ins., firmly set and plainly mkd. 4 notches on E. and 5 notches on S. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone to top, with brass cap mkd.

T7S R6W

S5	S4
S8	S9

1967

Bury original stone cor. alongside iron post.

Land, mountainous.
Soil, rocky.
Timber, dense juniper and pinon.
Undergrowth, sagebrush.

From the cor. of secs. 3, 4, 9 and 10.

N. 89° 46' W., bet. secs. 4 and 9.

Over mountainous land, through dense timber; asc. 150 ft over NE. slope.

8.80 Point of spur, slopes N.; desc. 100 ft. over NW. slope.

29.00 Draw, drains N. 60° E.; asc. 210 ft. over SE. slope.

38.97 The 1/4 sec. cor. of secs. 4 and 9, monumented with a limestone, 15x7x4 ins., firmly set and plainly mkd. 1/4 on N. face.

From which the original bearing trees:

A juniper, 8 ins. diam., bears N. 58° E., 55 lks. dist., mkd. 1/4 S4 BT. (Record N. 72° E., 53 lks. dist.)

A juniper, 14 ins. diam., bears N. 88° 30' E., 50 lks. dist., mkd. ¼S9 BT(Record S. 73° E., 54 lks. dist.)

At the cor. point

CHAINS	
	Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground, and in a mound of stone, 3½ ft. base to top, with brass cap mkd. T7S R6W ¼ S4/S9 1967 Bury original stone cor. alongside iron post.
	N. 89° 31' W., beginning new measurement.
	Asc. 330 ft. over SE. slope.
27.50	Ridge, bears N. 80° E. and S. 80° W.; desc. 10 ft. over NW. slope.
35.50	Base of descent; asc. 80 ft. over NE. slope.
40.03	The cor. of secs. 4, 5, 8 and 9.
	Land, mountainous. Soil, rocky. Timber, dense juniper and pinon W. portion, scattered E. portion. Undergrowth, sagebrush.
	N. 0° 08' E., bet. secs. 4 and 5.
	Over mountainous land, through dense timber; desc. 50 ft. over NE. slope.
1.00	Hollow, drains E.; asc. 110 ft. over S. slope.
8.20	Ridge, bears E. and W.; desc. 5 ft. over NE. slope.
17.20	Bottom of swale, drains E.; asc. 60 ft. over S. slope.
25.00	Rocky ridge, bears E. and W. By triangulation; desc. about 100 ft. over N. slope.
31.00	Enter cherry and aspen growth, bears E. and W.
33.00	Leave cherry and aspen growth, bears E. and W.
34.40	Bottom of Hell Hole Canyon, drains E.; asc. 150 ft. over S. slope.
40.40	The 1/4 sec. cor. of secs. 4 and 5, monumented with a sandstone, 15x6x6 ins., firmly set and plainly mkd. 1/4 on W. face. At the cor. point

Dependent Resurvey of the Subdivision,
T. 7 S., R. 6 W.

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground, and in a mound of stone, 3½ ft. base to top, with brass cap mkd.

T7S R6W
¼
S5|S4
1967

Bury original stone cor. alongside iron post.

N. 1° 11' W., beginning new measurement.

Asc. 400 ft. over S. slope.

28.10 Top of high mountain ridge, bears N. 50° E. and S. 50° W.; desc. 20 ft. over NE. slope.

35.10 Bottom of swale, drains S. 45° E.; leave dense timber, enter dense mahogany undergrowth; asc. 80 ft. over SE. slope.

41.73 The cor. of secs. 4, 5, 32 and 33, on the N. bdy. of Tp., hereinbefore described.

Land, mountainous.
Soil, rocky.
Timber, dense juniper and pinon.
Undergrowth, sagebrush and scattered mahogany.

From the cor. of secs. 31 and 32, on the S. bdy. of the Tp., monumented with an iron post, 2½ ins. diam., hereinbefore described.

N. 0° 04' E., bet. secs. 31 and 32.

Over mountainous land, through scattered timber. By triangulation; desc. 70 ft. over NW. slope.

16.70 Bottom of swale, head of Rock Canyon, drains E.; asc. 300 ft. over S. slope.

22.00 Trail road, bears N. 60° E. and S. 60° W.

40.04 The 1/4 sec. cor. of secs. 31 and 32, which is a stationary boulder stone, mkd. with an "X" at the exact cor. point and 1/4 on S. face of limestone, 1 ft. N. of "X".

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., over "X" on solid rock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T7S R6W
¼
S31|S32
1967

CHAINS	
	This cor. is on top of divide between Rush Valley and Skull Valley, bearing N. 45° E. and S. 45° W.
	N. 0° 03' E., beginning new measurement.
	Desc. 400 ft. over NW. slope.
14.00	Leave scattered timber, bears E. and W.
32.00	Hollow, drains S. 40° W.; asc. 270 ft. over SE. slope.
35.00	Enter scattered timber, bears E. and W.
39.86	The cor. of secs. 29, 30, 31 and 32, monumented with a sandstone, 16x8x6 ins., firmly set and plainly mkd. 1 notch on S. and 5 on E. edges.
	From which the original bearing trees:
	A juniper, 14 ins. diam., bears N. 35° E., 17 lks. dist., mkd. T7S R6W S29 BT.
	A juniper, 15 ins. diam., bears N. 88° W., 65 lks. dist., mkd. T7S R6W S30 BT.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a mound of stone, 4 ft. base to top, with brass cap mkd.
	T7S R6W S30 | S29 S31 | S32 1967
	Bury original stone cor. alongside iron post.
	Land, mountainous. Soil, rocky. Timber, scattered juniper and pinon. Undergrowth, sagebrush.
	From the cor. of secs. 28, 29, 32 and 33.
	N. 89° 41' W., bet. secs. 29 and 32.
	Over mountainous land, through scattered timber; asc. 700 ft. over SE. slope.
34.50	Top of high divide, bears N. and S.; desc. 105 ft. over W. slope.
39.36	The 1/4 sec. cor. of secs. 29 and 32, monumented with a sandstone, 15x6x6 ins., firmly set and plainly mkd. 1/4 on N. face.

Dependent Resurvey of the Subdivision,
T. 7 S., R. 6 W.

CHAINS

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground, and in a mound of stone, 3½ ft. base to top, with brass cap mkd.

T7S R6W

¼ S29/S32

1967

Bury original stone cor. alongside iron post.

N. 89° 35' W., beginning new measurement.

Desc. 660 ft. over W. slope.

26.20 Bottom of canyon; drains S. 5° W.; asc. 180 ft. over SE. slope.

30.00 Small hollow, drains S. 50° E., continue ascent.

39.66 The cor. of secs. 29, 30, 31 and 32.

Land, mountainous.
Soil, rocky loam.
Timber, scattered juniper and pinon.
Undergrowth, sagebrush.

S. 89° 50' W., bet. secs. 30 and 31.

Over mountainous land, through dense timber. By triangulation; asc. 100 ft. along S. slope.

4.00 Spur, slopes S.; desc. 70 ft. over W. slope.

9.60 Hollow, drains S.; asc. 80 ft. over SE. slope.

25.40 Ridge, bears S. 50° W. and N. 50° E. End triangulation; desc. 360 ft. over W. slope.

39.72 The 1/4 sec. cor. of secs. 30 and 31, monumented with a sandstone, 15x10x6 ins., firmly set and plainly mkd. 1/4 on N. face.

From which the original bearing trees:

A juniper, 18 ins. diam., bears N. 35° E., 55 lks. dist., mkd. 1/4 S30 BT.

A juniper, 14 ins. diam., bears N. 58° E., 43 lks. dist., mkd. 1/4 S30 BT.

At the cor. point

CHAINS	
	Set an iron post, 30 ins. long, 2½ ins. diam., 14 ins. in the ground, and in a collar of stone to top, with brass cap mkd. T7S R6W ¼ S30 S31 1967 Bury original stone cor. alongside iron post.
	N. 89° 54' W., beginning new measurement. Desc. 180 ft. over W. slope.
5.00	Hollow, drains N. 65° W.; asc. 50 ft. over NE. slope.
14.90	Spur, slopes N. 65° W.; desc. 230 ft. over SW. slope.
32.70	Ridge, bears N. 78° E. and S. 78° W.; desc. 70 ft. over NW. slope.
37.89	The cor. of secs. 30 and 31 on the W. bdy. of the Tp., hereinbefore described. Land, mountainous. Soil, rocky loam. Timber, dense juniper and pinon. Undergrowth, sagebrush.
	From the cor. of secs. 29, 30, 31 and 32. N. 0° 03' E., bet. secs. 29 and 30. Over mountainous land, through dense timber. By triangulation; asc. about 200 ft. over SW. slope.
16.65	Ridge, bears N. 80° W. and S. 80° E. End triangulation; desc. 280 ft. over NE. slope.
34.80	Hollow, drains S. 40° W.; asc. 20 ft. over SW. slope.
39.76	The 1/4 sec. cor. of secs. 29 and 30, monumented with a sandstone, 18x6x8 ins., firmly set and plainly mkd. 1/4 on W. face. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd. T7S R6W ¼ S30 | S29 1967

Dependent Resurvey of the Subdivision,
T. 7 S., R. 6 W.

CHAINS

Bury original stone cor. alongside iron post.

N. 0° 02' E., beginning new measurement.

Asc. 90 ft. over SW. slope.

7.00 Bottom of saddle on ridge, bears E. and W.; asc. 10 ft. along gentle W. slope.

15.00 Top of ascent; desc. 140 ft. over NW. slope.

22.80 Hollows, drains W.; asc. 30 ft. over S. slope.

28.50 Ridge, bears E. and W.; desc. 195 ft. over N. slope.

34.60 Draw, drains W.; asc. 105 ft. over S. slope.

39.85 Point for the cor. of secs. 19, 20, 29 and 30, at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T7S R6W

S19	S20
S30	S29

1967

Land, mountainous.
Soil, rocky loam.
Timber, dense juniper and pinon.
Undergrowth, sagebrush.

From the cor. of secs. 20, 21, 28 and 29.

N. 89° 20' W., bet. secs. 20 and 29.

Over mountainous land through scattered timber. By triangulation; asc. about 600 ft. along N. slope.

30.50 Point of spur, slopes S. 85° E. from W. End triangulation; asc. 350 ft. along top of spur.

39.51 Point for the 1/4 sec. cor. of secs. 20 and 29, at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T7S R6W

¼ S20
S29

1967

CHAINS	
	Asc. 200 ft. over SE. slope.
49.00	Divide between Rush Valley and Skull Valley, bears N. 25° E. and S.; desc. 640 ft. over SW. slope.
72.80	Small draw, drains S. 45° W.
79.02	The cor. of secs. 19, 20, 29 and 30.
	Land, mountainous. Soil, rocky loam. Timber, scattered juniper and pinon. Undergrowth, sagebrush.
	S. 89° 29' W., bet. secs. 19 and 30.
	Over mountainous land, through scattered timber. By triangulation; desc. about 500 ft. over SW. slope.
18.00	Draw, drains N. 35° W.; asc. about 500 ft. over NE. slope.
39.00	Ridge, bears N. 20° W. and S. 20° E.; desc. 20 ft. over SW. slope.
39.51	The 1/4 sec. cor. of secs. 19 and 30, monumented with a sandstone, 18x8x3 ins., firmly set and plainly mkd. 1/4 on N. face.
	From which the original bearing trees:
	A juniper, 6 ins. diam., bears S. 43° 15' E., 11½ lks. dist., mkd. BT only. (Record N. 85° E., 28 lks. dist., mkd. 1/4 S19 BT.)
	A juniper, 11 ins. diam., bears N. 45° 30' W., 165 lks. dist., mkd. S19 BT. (Record N. 35° W. 155 lks. dist.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 3 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.
	T7S R6W ¼ S19/S30 1967
	N. 89° 11' W., beginning new measurement.
	Desc. 380 ft. over NW. slope.
14.40	Draw, drains S. 60° W.; asc. 160 ft. over SE. slope.
18.10	Point of spur, slopes S.; desc. 180 ft. over SW. slope.

154

Dependent Resurvey of the Subdivision,
T. 7 S., R. 6 W.

CHAINS	
23.80	Draw, drains N. 60° W.; asc. 260 ft. over NE. slope.
35.00	Spur, slopes N. 45° W., desc. 85 ft. over SW. slope.
38.15	The cor. of secs. 19 and 30 on the W. bdy. of the Tp., thereinbefore described. Land, mountainous. Soil, rocky loam. Timber, scattered juniper and pinon. Undergrowth, sagebrush.
	From the cor. of secs. 19, 20, 29 and 30. N. 0° 03' W., bet. secs. 19 and 20. Over mountainous land, through scattered timber, asc. 60 ft. over SW. slope.
3.20	Spur, slopes W. By triangulation, desc. about 250 ft. over NW. slope.
12.20	Draw, drains W., asc. about 700 ft. over SW. slope.
39.85	Point for the 1/4 sec. cor. of secs. 19 and 20, at proportionate dist., there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd. T7S R6W ½ S19 | S20 1967 Asc. 155 ft. over SW. slope.
44.00	Top of divide, bears N. 15° E. and S. 20° E., desc. 210 ft. along W. slope. End triangulation.
70.30	Saddle on divide, bears N. 70° W. and S. 70° E., desc. 170 ft. over NE. slope.
79.70	The cor. of secs. 17, 18, 19 and 20, monumented with a limestone, 18x10x8 ins., firmly set and plainly mkd. 3 notches on S. and 5 on E. edges. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd. T7S R6W S18 | S17 S19 | S20 1967

CHAINS	
	Bury original stone cor. alongside iron post. Land, mountainous. Soil, rocky loam. Timber, scattered juniper and pinon. Undergrowth, sagebrush.
	From the cor. of secs. 16, 17, 20 and 21. S. 89° 55' W., bet. secs. 17 and 20. Over mountainous land, through scattered timber; asc. 15 ft. over SE. slope.
3.30	Spur, slopes N. 50° E.; desc. 55 ft. over NW. slope.
10.60	Draw, drains N. 15° E.; asc. 185 ft. over SE. slope.
20.00	Spur, slopes N. 50° E.; desc. 40 ft. over NW. slope.
26.50	Draw, drains N. 50° E.; asc. 300 ft. over SE. slope.
39.55	The 1/4 sec. cor. of secs. 17 and 20, monumented with a limestone, 20x8x2 ins., firmly set and plainly mkd. 1/4 on N. face. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 15 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd. T7S R6W ¼ S17/S20 1967 Bury original stone cor. alongside iron post. N. 89° 57' W., beginning new measurement. Asc. 55 ft. over SE. slope.
3.90	Spur, slopes N. 60° E.; asc. 340 ft. along N. slope.
22.20	Head of draw, drains N.; asc. 140 ft. over NE. slope.
26.90	Spur, slopes N.; desc. 70 ft. over NW. slope.
36.50	Draw, drains N. 10° E.; asc. 100 ft. over E. slope.
39.85	The cor. of secs. 17, 18, 19 and 20. Land, mountainous. Soil, rocky loam. Timber, scattered juniper and pinon. Undergrowth, sagebrush.
	S. 89° 51' W., bet. secs. 18 and 19. Over mountainous land, through scattered timber; asc. 280 ft. over E. slope.

Dependent Resurvey of the Subdivision,
T. 7 S., R. 6 W.

CHAINS	
7.70	Divide between Rush Valley and Skull Valley, bears N. 15° W. and S. 15° E. By triangulation; desc. about 700 ft. over NW. slope.
39.16	The 1/4 sec. cor. of secs. 18 and 19, monumented with a sandstone, 14x8x2 ins., firmly set and plainly mkd. 1/4 on N. face. End triangulation.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.
	T7S R6W ¼ S18/S19 1967
	Bury original stone cor. alongside iron post.
	Raise a mound of stone, 2½ ft. base, 1½ ft. high N. of cor.
	N. 89° 08' W., beginning new measurement.
	Desc. 5 ft. over NW. slope.
0.90	Draw, drains S. 45° W.; asc. 35 ft. over SE. slope.
11.80	Spur, slopes S.; desc. 320 ft. over SW. slope.
23.80	Draw, drains N. 70° W.; asc. 10 ft. over NE. slope.
28.70	Top of ascent, slopes N.; desc. 60 ft. along N. slope.
34.10	Spur, slopes N. 80° W.; desc. 80 ft. over SW. slope.
38.57	The cor. of secs. 18 and 19 on the W. bdy. of the Tp.; hereinbefore described.
	Land, mountainous. Soil, rocky loam. Timber, scattered juniper and pinon. Undergrowth, sagebrush.
	From the cor. of secs. 17, 18, 19 and 20.
	N. 0° 22' W., bet. secs. 17 and 18.
	Over mountainous land, through scattered timber. By triangulation; desc. about 200 ft. over N. slope.
22.10	Hollow, drains E.; asc. about 100 ft. over S. slope.
27.60	Spur, slopes N. 75° E.; desc. about 200 ft. over N. slope.

CHAINS	
39.90	The 1/4 sec. cor. of secs. 17 and 18, monumented with a limestone, 18x8x6 ins., firmly set and plainly mkd. 1/4 on W. face. End triangulation. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd. T7S R6W ¼ S18|S17 1967 Bury original stone cor. alongside iron post.
	N. 0° 09' W., beginning new measurement. Asc. 40 ft. over SE. slope.
7.50	Spur, slopes N. 75° E.; desc. 160 ft. over NW. slope.
13.20	Draw, drains E.; asc. 70 ft. over SE. slope.
21.70	Spur, slopes E.; desc. 160 ft. over N. slope.
28.20	Draw, drains E.; asc. 10 ft. over S. slope.
32.60	Spur, slopes E.; desc. 170 ft. over N. slope.
38.60	Draw, drains E.; asc. 30 ft. over S. slope.
39.97	The cor. of secs. 7, 8, 17 and 18, monumented with a conglomerate stone, 18x12x12 ins., firmly set and plainly mkd. 4 notches on S. and 5 on E. edges. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 3½ ft. base to top, with brass cap mkd. T7S R6W S7|S8 S18|S17 1967 Bury original stone cor. alongside iron post. Land, mountainous. Soil, rocky. Timber, scattered juniper and pinon. Undergrowth, sagebrush.
	From the cor. of secs. 8, 9, 16 and 17.

153

Dependent Resurvey of the Subdivision,
T. 7 S., R. 6 W.

CHAINS	
	S. 89° 55' W., bet. secs. 8 and 17.
	Over mountainous land, through scattered timber; asc. 65 ft. over E. slope.
1.60	Hollow, drains S. 45° E.
3.75	Rocky spur, slopes S. 10° W.; desc. 180 ft. over SW. slope.
18.90	Jeep road, bears S. 45° E. and N. 45° W.
19.80	Bottom of canyon, drains S. 45° E.; asc. 160 ft. over E. slope.
39.52	The 1/4 sec. cor. of secs. 8 and 17, monumented with a limestone, 15x10x8 ins., firmly set and plainly mkd. 1/4 on N. face.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T7S R6W ¼ S8/S17 1967
	Bury original stone cor. alongside iron post.
	Raise a mound of stone, 2½ ft. base, 1½ ft. high N. of cor.
	S. 89° 36' W., beginning new measurement.
	Desc. 70 ft. over NW. slope.
10.00	Hollow, drains N. 45° E.; asc. 100 ft. over SE. slope.
15.00	Ridge, bears N. and S.; desc. 50 ft. over SW. slope.
20.00	Small hollow, drains S. 45° E.; asc. 120 ft. over NE. slope.
33.00	Hollow, drains N. 45° E.; asc. 30 ft. over SE. slope.
40.22	The cor. of secs. 7, 8, 17 and 18.
	Land, mountainous. Soil, rocky. Timber, scattered juniper. Undergrowth, sagebrush.
	N. 89° 54' W., bet. secs. 7 and 18.
	Over mountainous land, through scattered timber; asc. 280 ft. over SE. slope.

Dependent Resurvey of the Subdivision,
T. 7 S., R. 6 W.

CHAINS	
18.00	Spur, slopes N. 30° E.; desc. 300 ft. over NW. slope.
28.00	Head of draw, drains N. 25° E.; asc. 350 ft. over SE. slope.
38.80	Divide between Rush Valley and Skull Valley, bears N. 30° W. and S. 30° E.; desc. 10 ft. over SW. slope.
39.19	The 1/4 sec. cor. of secs. 7 and 18, monumented with a limestone, 18x8x6 ins., firmly set and plainly mkd. 1/4 on N. face.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.
	T7S R6W ¼ S7/S18 1967
	Bury original stone cor. alongside iron post.
	N. 88° 23' W., beginning new measurement.
	Desc. 870 ft. over NW. slope.
27.45	Draw, drains N. 45° W.; desc. 320 ft. along N. slope.
38.00	Draw, drains S. 65° W.; desc. 5 ft. over SW. slope.
38.06	The cor. of secs. 7 and 18 on the W. bdy. of the Tp., hereinbefore described.
	Land, mountainous. Soil, rocky loam. Timber, widely scattered juniper and pinon. Undergrowth, sagebrush.
	From the cor. of secs. 7, 8, 17 and 18.
	N. 0° 30' E., bet. secs. 7 and 8.
	Over mountainous land, through widely scattered timber. By triangulation; asc. about 50 ft. over SE. slope.
6.00	Spur, slopes E.; desc. about 100 ft. over N. slope.
12.00	Hollow, drains E.; asc. about 75 ft. over S. slope.
20.35	Spur, slopes E.; desc. 120 ft. over N. slope.
27.80	Hollow, drains E.; asc. 100 ft. over S. slope.
30.25	Spur, slopes E.; desc. about 150 ft. over N. slope.

Dependent Resurvey of the Subdivision,
T. 7 S., R. 6 W.

CHAINS	
34.00	Bottom of swale, drains E.; asc. 200 ft. over SW. slope.
40.30	Spur, slopes S. 70° E.; desc. 15 ft. over NE. slope.
40.70	Point for the 1/4 sec. cor. of secs. 7 and 8, at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd. T7S R6W ¼ S7 | S8 1967 Desc. 15 ft. over NE. slope.
43.50	Draw, drains S. 20° E.; asc. 190 ft. over SW. slope.
50.00	Spur, slopes S. 80° W.; asc. 60 ft. along W. slope.
55.75	Slope changes; asc. 160 ft. over SE. slope.
61.00	Ridge, bears N. 15° W. and S. 15° E.; desc. 55 ft. over NE. slope.
81.40	Point for the sec. cor. of secs. 5, 6, 7 and 8, at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 16 ins. in the ground, and in a mound of stone, 3½ ft. base to top, with brass cap mkd. T7S R6W S6 | S5 S7 | S8 1967 Land, mountainous. Soil, rocky. Timber, widely scattered juniper and pinon. Undergrowth, sagebrush.

From the cor. of secs. 4, 5, 8 and 9.

S. 89° 56' W., bet. secs. 5 and 8.

Over mountainous land, through scattered timber; asc. 600 ft. over NE. slope.

18.80	Ridge, bears N. 25° W. and S. 25° E.; desc. 170 ft. over SW. slope.
27.10	Draw, drains S. 20° W.; asc. 60 ft. over SE. slope.

CHAINS	
31.10	Spur, slopes S.; desc. 200 ft. over W. slope.
39.11	The 1/4 sec. cor. of secs. 5 and 8, monumented with a limestone, 15x9x6 ins., firmly set and plainly mkd. 1/4 on N. face. From which the original bearing tree: A juniper, 12 ins. diam., bears S. 10° W., 170 lks. dist., mkd. 1/4 S8 BT. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd. T7S R6W S5 / S8 1967 Bury original stone cor. alongside iron post. --- N. 89° 20' W., beginning new measurement. Desc. 55 ft. over W. slope.
2.60	Draw, drains S.; asc. 60 ft. over E. slope.
4.60	Spur, slopes S.; desc. 270 ft. over SW. slope.
20.90	Draw, drains S.; asc. 190 ft. over steep NE. slope.
26.90	Slope changes; asc. 200 ft. over SE. slope.
40.25	The cor. of secs. 5, 6, 7 and 8. Land, mountainous. Soil, rocky loam. Timber, widely scattered juniper and pinon. Undergrowth, sagebrush.
	S. 89° 44' W., bet. secs. 6 and 7. Over mountainous land, through scattered timber and sagebrush; asc. 100 ft. over SE. slope.
5.00	Spur, slopes S. 15° E.; desc. 140 ft. over SW. slope.
12.00	Draw, drains S. 20° E.; asc. 280 ft. over E. slope.
21.70	Spur, slopes S.; desc. 150 ft. over NW. slope.
27.10	Draw, drains S. 50° W.; asc. 60 ft. over SE. slope.

CHAINS	
36.90	Top of ascent, slopes S.; desc. 30 ft. along S. slope.
40.25	Point for the 1/4 sec. cor. of secs. 6 and 7, at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground to bedrock, and in a mound of stone, 3½ ft. base to top, with brass cap mkd. T7S R6W ¼ S6/S7 1967 Desc. 30 ft. along S. slope.
42.30	Ridge, bears N. 30° E. and S. 30° W.; desc. 180 ft. over NW. slope.
48.90	Draw, drains N. 45° W.; asc. 120 ft. over NE. slope.
61.80	Top of ascent, bears N. and S.; desc. 100 ft. over NW. slope.
68.20	Head of draw, drains N.; asc. 110 ft. over NE. slope.
73.20	Ridge, bears N. 50° W. and S. 50° E.; desc. 150 ft. over SW. slope.
77.96	The cor. of secs. 6 and 7 on the W. bdy. of the Tp., hereinbefore described. Land, mountainous. Soil, rocky loam. Timber, scattered juniper and pinon. Undergrowth, sagebrush.
	From the cor. of secs. 5, 6, 7 and 8. N. 0° 27' W., bet. secs. 5 and 6. Over mountainous land, through scattered timber and sagebrush; asc. 50 ft. over SE. slope.
4.00	Spur, slopes S. 70° E.; desc. 200 ft. over NE. slope.
20.00	Head of draw, drains S. 70° E.; asc. 300 ft. over SW. slope.
40.65	Ridge, bears N. 80° E. and S. 80° W.; desc. 5 ft. over NW. slope.
40.70	Point for the 1/4 sec. cor. of secs. 5 and 6, at proportionate dist.; there is no remaining evidence of the original cor.

CHAINS	
	Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground to bedrock, and in a mound of stone, 3½ ft. base to top, with brass cap mkd. T7S R6W ¼ S6 | S5 1967
	Desc. 150 ft. over NW. slope.
55.00	Draw, drains S. 60° W.; asc. 175 ft. over SW. slope.
67.00	Spur, slopes S. 60° W.; desc. 50 ft. over NW. slope.
75.00	Head of draw, drains S. 60° W.; asc. 50 ft. over SW. slope.
81.80	The cor. of secs. 5, 6, 31 and 32 on the N. bdy. of the Tp., hereinbefore described. Land, mountainous. Soil, rocky loam. Timber, scattered juniper and pinon. Undergrowth, sagebrush.

General Description

The general elevation of the township ranges from about 5,600 ft. in the eastern portion to about 8,000 ft. in the western portion. The western portion of the township falls in the Onaqui Mountain Range. The eastern portion is gently rolling bench land. The extreme western portion of the township drains in a westerly direction. The remainder of the township is drained in a southeasterly direction by numerous small washes and draws. The central portion of the township is covered with a dense growth of juniper timber. The remainder of the township is widely scattered juniper timber. There was one spring noted in the NE¼ of sec. 8. This spring has been developed to provide livestock water throughout the eastern portion of the township by an underground pipeline which is located in the bottom of Faust Canyon. There are numerous trail roads noted in the area, and one major road through secs. 8, 16, 22, 25 and 26 in the bottom of Faust Canyon. The soil is rocky loam in the western portion of the township and clay loam in the eastern portion.

Blank

Page

Form 4—680
(June 1963)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS

NAMES	CAPACITY
Ferrel D. Reynolds	Surveying Technician
Merlin J. Robinson	Surveying Aid
Vernon R. Griffin	Surveying Aid
Morris E. Blackburn	Surveying Aid

100

CERTIFICATE OF SURVEY

I, Glen B. Hatch, HEREBY CERTIFY upon honor that,

in pursuance of special instructions bearing date of the 18th day of May, 1965,

I have made a retracement and a dependent resurvey of a portion of the South Boundary, the dependent resurvey of the North and West Boundaries and the subdivisional lines of Township 7 South, Range 6 West

of the Salt Lake Meridian, in the State of Utah, which

are represented in the foregoing field notes as having been executed by me and under my direction;

and that said survey has been made in strict conformity with said special instructions, the Manual

of Instructions for the Survey of the Public Lands of the United States, and in specific manner

described in the foregoing field notes.

July 15, 1968
(Date)

Glen B Hatch
(Cadastral Surveyor)
SUPERVISORY

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

SUBMITTED FOR APPROVAL
Date DEC 27 1968

BUREAU OF LAND MANAGEMENT,
Washington, D. C.

The foregoing field notes of the retracement and dependent resurvey of a portion of the South Boundary, the dependent resurvey of the North and West Boundaries and the subdivisional lines of Township 7 South Range 6 West, Salt Lake Meridian, Utah

executed by Glen B. Hatch, Supervisory Cadastral Surveyor

having been critically examined and found correct, are hereby approved.

APR 2 1970
(Date)

Clark F Gumm
(~~Chief, Division of Engineering~~)
Chief, Division of Cadastral Survey

CERTIFICATE OF TRANSCRIPT

~~I CERTIFY That the foregoing transcript of the field notes of the above described surveys in~~

, is a true copy of the original field notes.

(Date)

(~~Chief, Division of Engineering~~)

Blank

Page

Blank

Page

Form 4-679
(January 1963)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

ORIGINAL

FIELD NOTES

OF THE

DEPENDENT RESURVEY

OF

THE SECOND STANDARD PARALLEL NORTH (SOUTH BOUNDARY)

GUIDE MERIDIAN WEST (EAST BOUNDARY)

THE WEST BOUNDARY

AND

THE SUBDIVISIONAL LINES

OF

TOWNSHIP 9 NORTH, RANGE 15 WEST

RECEIVED
STATE OF LAND OFFICE
JUN 17 PM 12:36
DEPT. OF INTERIOR
BUR. OF LAND MGMT.

Of the SALT LAKE Meridian,

In the State of UTAH.

EXECUTED BY

FRED R. CHAPPELL SUPERVISORY CADASTRAL SURVEYOR

GLEN B. HATCH SUPERVISORY CADASTRAL SURVEYOR

Under special instructions dated FEBRUARY 20, 19 67, which provided for the surveys included under Group Number 491, approved FEBRUARY 24, 1967, and assignment instructions dated FEBRUARY 24, 19 67. and May 26, 19 67.

Survey commenced MARCH 8, 19 67

Survey completed JULY 14, 19 67

INDEX DIAGRAM

Township 9 NORTH, Range 15 WEST,

18 **6** 60	60 **5** 59	49 **4** 49	41 **3** 41	34 **2** 33	26 **1** 12 25
17 **7** 58	58 **8** 57	48 **9** 47	40 **10** 39	32 **11** 32	25 **12** 12 24
16 **18** 56	56 **17** 55	46 **16** 46	39 **15** 38	31 **14** 30	23 **13** 11 23
15 **19** 54	54 **20** 53	45 **21** 44	37 **22** 37	30 **23** 29	22 **24** 10 21
14 **30** 51	52 **29** 51	43 **28** 43	36 **27** 35	28 **26** 28	20 **25** 9 20
13 **31** 7	50 **32** 6	42 **33** 5	34 **34** 4	27 **35** 3	19 **36** 8 2

Dependent Resurvey, Township 9 North, Range 15 West

CHAINS

The Second Standard Parallel North (South Boundary), the Guide Meridian West (East Boundary), the West Boundary, the North Boundary and the subdivisional lines were surveyed by G. V. M. Boutelle in 1872. In 1882, F. Dickert resurveyed the Second Standard Parallel North (South Boundary) and the Guide Meridian West (East Boundary). H. Fitzhugh resurveyed the North Boundary in 1883 and the West Boundary in 1884. The North Boundary was dependently resurveyed concurrently by Fred R. Chappell under this same group. The following field notes are those of the dependent resurvey of the Second Standard Parallel North (South Boundary), the Guide Meridian West (East Boundary), the West Boundary, and the subdivisional lines of Township 9 North, Range 15 West.

The survey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1947, and special instructions dated February 20, 1967.

Before restoring the corners, the lines of the original survey were retraced and a diligent search made for any evidence of the original corners, or other calls of the original field note record. The rules of proportionate measurement were applied to ascertain the position of the lost corners, but not until exhausting every reasonable possibility of finding direct evidence for the control of each particular corner.

The direction of the lines of this survey were determined by the solar transit method.

The geographic position of the southeast corner of the township is at Latitude 41° 27' 08.39" N. and Longitude 113° 29' 56.41" W., as determined from section line ties to U.S.C. and G.S. triangulation station "Lemay," a standard bronze disk set in solid bedrock at Latitude 41° 26' 06.135" N. and Longitude 113° 32' 24.035" W., located S. 5° 52' 20" W., 94.63 chs. distance from the standard cor. of secs. 34 and 35, Township 9 North, Range 15 West.

The magnetic declination was read at several stations throughout the township and the average of these readings was found to be 17° 15' East.

Dependent Resurvey of the Second Standard Parallel North (South Boundary), Township 9 North, Range 15 West.

Reestablishment of the Survey Executed by G. V. M. Boutelle in 1872 and the Resurvey Executed by F. Dickert in 1882.

Beginning at the standard cor. of Tps. 8 and 9 N., Rs. 14 and 15 W., monumented with a limestone, 25x24x6 ins., firmly set and plainly mkd. SC on N. face and 6 notches on the N., E. and W. edges.

At the cor. point

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground with brass cap mkd.

SC
T9N
R15W R14W

S36	S31
S1	S6

T8N
1967

Bury original stone cor. alongside iron post.

Thence

S. 89° 22' W., along the S. bdy. of sec. 36.

Over gently rolling desert land through shadscale and sagebrush undergrowth.

17.95 Wash, 60 lks. wide, 3 ft. deep, drains S. 53° W.

25.00 Wash, 15 lks. wide, 2 ft. deep, drains S. 70° W.

40.04 Point for the standard 1/4 sec. cor. of sec. 36 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with broken glass alongside, and brass cap mkd.

SC
T9N R15W
¼ S36
1967

Continue over gently rolling desert land.

70.65 Wash, 15 lks. wide, 3 ft. deep, drains S. 9° E.

77.95 Wash, 15 lks. wide, 4 ft. deep, drains S. 12° W.

80.08 The standard cor. of secs. 35 and 36, monumented with a pine post, 3x3 ins., 24 ins. long, mkd. SC on N. and dim notches on W. edge.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

SC
T9N R15W

S35	S36

1967

173

Dependent Resurvey of the Second Standard Parallel
North (South Boundary), Township 9 North, Range 15 West

CHAINS	
	Bury original pine post cor. alongside iron post. Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, shadscale and sagebrush.
	S. 88° 33' W., along the S. bdy. of sec. 35. Over gently rolling desert land through sagebrush and shadscale undergrowth.
4.85	Wash, drains S.
11.25	Wash, drains S.
14.25	Wash, drains S.
27.25	Wash, drains S.
40.25	The standard 1/4 sec. cor. of sec. 35, monumented with a pine post, 24 ins. long, 3 ins. square, dimly mkd. 1/4 on one side. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. SC T9N R15W ¼ S35 1967 Bury original pine post cor. alongside iron post.
	N. 89° 12' W., beginning new measurement.
22.00	Wash, drains S. 10° W.
40.11	The standard cor. of secs. 34 and 35, monumented with a pine post, 24 ins. long, 3 ins. square, dimly mkd. SC on one side. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. SC T9N R15W S34|S35 1967 Bury original pine post cor. alongside iron post. Set a steel fence post, 6 ft. long, 3 ft. in ground, N. of cor.

Dependent Resurvey of the Second Standard Parallel North (South Boundary), Township 9 North, Range 15 West

CHAINS	
	From this cor., U.S.C. and G.S. triangulation station "Lemay," a standard bronze disk set in solid bedrock, bears S. 5° 52' 20" W., 94.63 chs. dist. Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, sagebrush and shadscale.
	S. 88° 29' W., along the S. bdy. of sec. 34. Over gently rolling land through sagebrush and shadscale undergrowth.
8.30	Wash, 15 lks. wide, 1 ft. deep, drains S. 3° E.
18.70	Wash, 1.00 ch. wide, 5 ft. deep, drains S. 10° E.
21.60	Wash, 25 lks. wide, 1 ft. deep, drains S. 37° E.
28.55	Underground pipeline to Lemay Station, with trail road along E. side, bears N. 15° W. and S. 15° E.
39.82	The standard 1/4 sec. cor. of sec. 34, monumented with a pine post, 30 ins. long, 4 ins. square, plainly mkd. 1/4 SC on N. face. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. SC T9N R15W ¼ S34 1967 Bury original pine post cor. alongside iron post.
	S. 89° 19' W., beginning new measurement.
28.85	Wash, 30 lks. wide, 4 ft. deep, drains S. 5° W.
38.35	Wash, 20 lks. wide, 4 ft. deep, drains S. 9° W.
40.43	The standard cor. of secs. 33 and 34, monumented with a limestone, 12x9x8 ins., firmly set and plainly mkd. 3 notches on E. and W. edges and SC on N. face. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. SC T9N | R15W S33 | S34 1967 Bury original stone cor. alongside iron post. Set a steel fence post, 6 ft. long, alongside iron post.

Dependent Resurvey of the Second Standard Parallel
North (South Boundary), Township 9 North, Range 15 West

CHAINS	
	Land, gently rolling. Soil, sandy clay. No timber. Undergrowth, sagebrush and shadscale.
	S. 89° 09' W., along the S. bdy. of sec. 33. Over gently rolling desert land through sagebrush and shadscale undergrowth.
20.00	Wash, 20 lks. wide, 6 ft. deep, drains S. 40° E.
27.70	Wash, 20 lks. wide, 5 ft. deep, drains S. 15° W.
39.95	The standard 1/4 sec. cor. of sec. 33, monumented with a pine post, 30 ins. long, 4 ins. square, plainly mkd. 1/4 SC on N. face. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. SC T9N R15W ¼ S33 1967 Bury original stone cor. alongside iron post. Set a steel fence post, 6 ft. long, alongside iron post.
	S. 89° 21' W., beginning new measurement.
1.65	Wash, 10 lks. wide, 2 ft. deep, drains S. 10° W.
30.15	Wash, drains S. 10° E.
40.17	The standard cor. of secs. 32 and 33, monumented with a limestone, 14x9x6 ins., firmly set and plainly mkd. 2 notches on W. and 4 on E. edges and SC on N. face. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. SC T9N | R15W S32 | S33 1967 Bury original stone cor. alongside iron post. Set a steel fence post, 6 ft. long, alongside iron post.

Dependent Resurvey of the Second Standard Parallel
North (South Boundary), Township 9 North, Range 15 West

CHAINS	
	Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, sagebrush and shadscale.
	S. 89° 15' W., along the S. bdy. of sec. 32. Over gently rolling desert land through shadscale and sagebrush undergrowth.
11.00	Wash, drains S. 10° E.
26.00	Wash, drains S. 10° E.
40.03	The standard 1/4 sec. cor. of sec. 32, monumented with a partially decayed cedar post, 24 ins. long, 4 ins. square, mkd. 1/4 SC on one face. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. SC T9N R15W ¼ S32 1967 Bury original cedar post cor. alongside iron post. Set a steel fence post, 6 ft. long, alongside iron post.
	S. 89° 18' W., beginning new measurement.
40.04	The standard cor. of secs. 31 and 32, monumented with a limestone, 12x10x6 ins., firmly set and plainly mkd. 5 notches on E. And 1 on W. edges. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. SC T9N R15W S31|S32 1967 Bury original stone cor. alongside iron post. Set a steel fence post, 6 ft. long, alongside iron post.

CHAINS	
	Land, gently rolling desert. Soil, clay. No timber. Undergrowth, shadscale and sagebrush.
	S. 89° 12' W., along the S. bdy. of sec. 31. Over gently rolling desert land through shadscale and sagebrush undergrowth.
27.50	Trail road, bears irregularly N. 11° E. and S. 11° W.
31.80	Wash, 5 lks. wide, 2 ft. deep, drains S. 7° W.
41.17	The standard 1/4 sec. cor. of sec. 31, monumented with a limestone, 8x6x3 ins., firmly set and plainly mkd. 1/4 SC on N. face. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. SC T9N R15W ¼ S31 1967 Bury original stone cor. alongside iron post.
	S. 89° 09' W., beginning new measurement.
39.90	The standard cor. of T. 9 N., Rs. 15 and 16 W., monumented with a pine post, 24 ins. long, 4 ins. square, mkd. 6 notches on N., E. and W. edges. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with broken glass at base, and brass cap mkd. SC T9N R16W R15W S36 | S31 1967 Bury original pine post cor. alongside iron post. Set a steel fence post, 6 ft. long, alongside iron post.

Dependent Resurvey of the Second Standard Parallel North (South Boundary), Township 9 North, Range 15 West

CHAINS	
	Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, shadscale and sagebrush.

Dependent Resurvey of Guide Meridian West (East Boundary), Township 9 North, Range 15 West.

Reestablishment of the Survey Executed by G. V. M. Boutelle in 1872 and the Resurvey Executed by F. Dickert in 1882.

From the standard cor. of Tps. 8 and 9 N., Rs. 14 and 15 W., hereinbefore described.

N. 0° 47' W., bet. secs. 31 and 36.

Over rolling land through sagebrush undergrowth.

6.70	Wash, 15 lks. wide, 3 ft. deep, drains S. 63° W.
17.15	Wash, 60 lks. wide, 3 ft. deep, drains S. 58° W.
22.10	Wash, 75 lks. wide, 15 ft. deep, drains S. 37° W.
23.60	Wash, 40 lks. wide, 8 ft. deep, drains S. 36° W.
24.35	Wash, 85 lks. wide, 15 ft. deep, drains S. 40° W.
29.85	Wash, 75 lks. wide, 12 ft. deep, drains S. 32° W.
39.99	The 1/4 sec. cor. of secs. 31 and 36, monumented with a conglomerate stone, 12x10x8 ins. in mound of stone, dimly mkd. 4 on one face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T9N
R15W R14W
¼
S36|S31
1967

Bury original stone cor. alongside iron post.

N. 0° 45' W., beginning new measurement.

8.10	Wash, 20 lks. wide, 10 ft. deep, drains S. 80° W.
9.95	Wash, 15 lks. wide, 4 ft. deep, drains S. 81° W.
14.75	Wash, 30 lks. wide, 5 ft. deep, drains S. 74° W.

Dependent Resurvey of Guide Meridian West (East Boundary), Township 9 North, Range 15 West

CHAINS	
26.60	Wash, 140 lks. wide, 20 ft. deep, drains S. 29° W.
40.20	The cor. of secs. 25, 30, 31 and 36, monumented with a limestone, 18x8x6 ins., firmly set and plainly mkd. 1 notch on S. and 5 on N. edges. At the corner point Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T9N R15W R14W S25 | S30 S36 | S31 1967 Bury original stone cor. alongside iron post. Land, rolling desert. Soil, sandy. No timber. Undergrowth, sagebrush.
	N. 0° 45' W., bet. secs. 25 and 30. Over rolling land through sagebrush undergrowth.
1.20	Trail road, bears N. 44° W. and S. 44° E.
7.30	Trail road, bears N. 77° E. and S. 77° W.
28.40	Trail road, bears N. 38° W. and S. 38° E.
40.20	The 1/4 sec. cor. of secs. 25 and 30, monumented with a quartz stone, 10x6x4 ins., firmly set and plainly mkd. 1/4 on W. face. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T9N R15W R14W ¼ S25 | S30 1967 Bury original stone cor. alongside iron post.
	N. 0° 46' W., beginning new measurement.
22.30	Trail road, bears N. 38° W. and S. 38° E.
40.20	The cor. of secs. 19, 24, 25 and 30, monumented with a limestone, 18x6x6 ins., firmly set and dimly mkd. 2 notches on S. and 4 on N. edges. At the cor. point

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T9N
R15W R14W

S24	S19
S25	S30

1967

Bury original stone cor. alongside iron post.

Land, rolling desert.
Soil, sandy clay.
No timber.
Undergrowth, sagebrush and shadscale.

N. 0° 40' W., bet. secs. 19 and 24.

Over gently rolling desert land through shadscale and sagebrush undergrowth.

40.13 The 1/4 sec. cor. of secs. 19 and 24, monumented with a limestone, 12x8x6 ins., firmly set and plainly mkd. 1/4 on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T9N
R15W R14W
¼
S24 | S19

1967

Bury original stone cor. alongside iron post.

Set a steel fence post, 6 ft. long, alongside iron post.

N. 0° 48' W., beginning new measurement.

17.80 Trail road, bears N. 53° W. and S. 53° E.

40.13 Point for the cor. of secs. 13, 18, 19 and 24 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T9N
R15W R14W

S13	S18
S24	S19

1967

CHAINS	
	Land, gently rolling desert. Soil, clay. No timber. Undergrowth, shadscale and sagebrush.
	N. 0° 48' W., bet. secs. 13 and 18. Over gently rolling land through shadscale and sagebrush undergrowth.
40.13	The 1/4 sec. cor. of secs. 13 and 18, monumented with a pine post, 30 ins. long, 4 ins. square, plainly mkd. 1/4 on W. face. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T9N R15W R14W ¼ S13|S18 1967 Bury original pine post cor. alongside iron post. Set a steel fence post, 6 ft. long, alongside iron post.
	N. 0° 46' W., beginning new measurement.
13.70	Sand dune, bears N. 82° E. and S. 82° W.
25.55	Trail road, bears N. 78° W. and S. 78° E.
40.26	The cor. of secs. 7, 12, 13 and 18, monumented with a pine post, 30 ins. long, 3 ins. square, mkd. 4 notches on S. and 2 on N. edges. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T9N R15W R14W S12|S7 S13|S18 1967 Bury original pine post cor. alongside iron post. Set a steel fence post, 6 ft. long, alongside iron post. Land, gently rolling desert. Soil, sandy. No timber. Undergrowth, shadscale and sagebrush.

182

Dependent Resurvey of Guide Meridian West (East Boundary), Township 9 North, Range 15 West

CHAINS

N. 0° 48' W., bet. secs. 7 and 12.

Over gently rolling land through shadscale and sagebrush undergrowth.

40.26 The 1/4 sec. cor. of secs. 7 and 12, monumented with a limestone, 14x9x4 ins., firmly set and plainly mkd. 1/4 on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T9N
R15W R14W
¼
S12|S7
1967

Bury original stone cor. alongside iron post.

Set a steel fence post, 6 ft. long, alongside iron post.

N. 0° 42' W., beginning new measurement.

40.08 Point for the cor. of secs. 1, 6, 7 and 12 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T9N
R15W R14W
S1|S6
S12|S7
1967

Raise a mound of stone, 3 ft. base, 1½ ft. high, W. of cor.

Land, gently rolling desert.
Soil, sandy clay.
No timber.
Undergrowth, shadscale and sagebrush.

N. 0° 42' W., bet. secs. 1 and 6.

Over gently rolling land through shadscale and sagebrush undergrowth.

1.50 Abandoned Central Pacific Railroad grade, on curve, bears S. 70° W. and N. 70° E.

40.08 The 1/4 sec. cor. of secs. 1 and 6, monumented with a limestone, 12x10x6 ins., firmly set and plainly mkd. 1/4 on W. face.

At the cor. point

Dependent Resurvey of Guide Meridian West (East Boundary), Township 9 North, Range 15 West

CHAINS	
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T9N R15W R14W ¼ S1|S6 1967 Bury original stone cor. alongside iron post. Set a steel fence post, 6 ft. long alongside iron post. --- N. 0° 38' W., beginning new measurement.
40.00	The cor. of Tps. 9 and 10 N., Rs. 14 and 15 W., monumented with an iron post, 2½ ins. diam., set, mkd. and witnessed as described in the field notes of T. 10 N., R. 15 W., surveyed concurrently under this same group. Land, gently rolling desert. Soil, clay. No timber. Undergrowth, shadscale and sagebrush.
	Dependent Resurvey of the W. Bdy., T. 9 N., R. 15 W.
	Reestablishment of the Survey Executed by G. V. M. Boutelle in 1872 and the Resurvey Executed by H. Fitzhugh in 1884. --- From the standard cor. of Tps. 9 N., Rs. 15 and 16 W., hereinbefore described. N. 0° 05' E., bet. secs. 31 and 36. Over gently rolling land through sagebrush and shadscale undergrowth.
40.10	The 1/4 sec. cor. of secs. 31 and 36, monumented with a pine post, 30 ins. long, 3 ins. square, plainly mkd. ¼ on W. face. At the cor. point

Dependent Resurvey of the W. Bdy., T. 9 N., R. 15 W.

CHAINS	
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T9N R16W R15W ¼ S36 | S31 1967 Bury original pine post cor. alongside iron post. Set a steel fence post, 6 ft. long, alongside iron post.
	N. 0° 42' W., beginning new measurement.
19.85	Trail road, bears N. 15° W. and S. 15° E.
36.42	Abandoned Central Pacific Railroad grade, bears N. 62° 51' E. and S. 62° 51' W.
40.13	Point for the cor. of secs. 25, 30, 31 and 36 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T9N R16W R15W S25 | S30 S36 | S31 1967 Deposit broken glass and set a steel fence post, 6 ft. long, alongside iron post. Land, gently rolling desert. Soil, clay. No timber. Undergrowth, shadscale and sagebrush.
	N. 0° 42' W., bet. secs. 25 and 30, Over gently rolling desert land through shadscale and sagebrush undergrowth.
11.10	Wash, 25 lks. wide, 3 ft. deep, drains S. 9° W.
33.90	Wash, 30 lks. wide, 4 ft. deep, drains S. 20° E.
40.13	Point for the 1/4 sec. cor. of secs. 25 and 30 at proportionate distance; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

CHAINS	
	T9N R16W R15W ¼ S25 | S30 1967 Deposit broken glass and set a steel fence post, 6 ft. long, alongside iron post.
42.30	Wash, 35 lks. wide, 4 ft. deep, drains S. 34° W.
80.26	Point for the cor. of secs. 19, 24, 25 and 30 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T9N R16W R15W S24 | S19 S25 | S30 1967 Deposit broken glass and set a steel fence post, 6 ft. long, alongside iron post. Land, gently rolling. Soil, sandy clay. No timber. Undergrowth, shadscale and sagebrush.
	N. 0° 42' W., bet. secs. 19 and 24. Asc. 100 ft. over rolling desert land through shadscale and sagebrush undergrowth.
40.13	The 1/4 sec. cor. of secs. 19 and 24, monumented with a pine post, 30 ins. long, 4 ins. square, plainly mkd. 1/4S on W. face. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T9N R16W R15W ¼ S24 | S19 1967 Bury original pine post cor. alongside iron post. Set a steel fence post, 6 ft. long, alongside iron post. ——— N. 1° 11' W., beginning new measurement.

Dependent Resurvey of the W. Bdy., T. 9 N., R. 15 W.

CHAINS	
	Asc. 90 ft. over rolling desert land.
27.65	State Highway No. 70, bears N. 39° 35' E. and S. 39° 35' W.
31.65	Transmission line, parallel to highway.
40.13	Point for the cor. of secs. 13, 18, 19 and 24 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T9N R16W R15W S13 | S18 S24 | S19 1967 Deposit broken glass and set a steel fence post, 6 ft. long, alongside iron post. Land, rolling desert. Soil, gravelly. No timber. Undergrowth, shadscale and sagebrush.
	N. 1° 11' W., bet. secs. 13 and 18. Over rolling land through shadscale and sagebrush undergrowth; asc. 115 ft. over SE. slope.
10.95	Wash, 25 lks. wide, 5 ft. deep, drains S. 47° E.
12.10	Trail road, bears N. 80° W. and S. 80° E.
40.13	Point for the 1/4 sec. cor. of secs. 13 and 18 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., over a cross (X) cut in solid stone, 5 ft. base to top, with brass cap mkd. T9N R16W R15W ¼ S13 | S18 1967 Set a steel fence post, 6 ft. long, in mound of stone, alongside iron post.
42.00	Rocky spur, slopes E.; desc. 140 ft. over NE. slope.
55.50	Enter widely scattered juniper timber.

CHAINS	
80.26	The cor. of secs. 7, 12, 13 and 18, monumented with a pine post, 16 ins. long, 4 ins. square, firmly set in a mound of stone, and mkd. 4 notches on S. face. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T9N R16W R15W S12 | S7 S13 | S18 1967 Bury original pine post cor. alongside iron post. Raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor. Land, rolling. Soil, gravelly. Timber, widely scattered juniper N. portion. Undergrowth, shadscale and sagebrush.
	N. 0° 38' W., bet. secs. 7 and 12. Asc. 70 ft. over rolling land through widely scattered juniper timber, with sagebrush undergrowth.
22.10	Top of ascent; thence over gently rolling land.
40.13	The 1/4 sec. cor. of secs. 7 and 12, monumented with a pine post, 16 ins. long, 4 ins. square, plainly mkd. 1/4 on W. face. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T9N R16W R15W ¼ S12 | S7 1967 Bury original pine post cor. alongside iron post. Raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor. --- N. 1° 02' W., beginning new measurement. Desc. 20 ft. over NW. slope.

Dependent Resurvey of the W. Bdy., T. 9 N., R. 15 W.

CHAINS	
18.25	Wash, drains N. 45° E.; asc. 50 ft. over SE. slope.
37.50	Spur, slopes N. 45° E.; desc. 35 ft. over NW. slope.
40.15	The cor. of secs. 1, 6, 7 and 12, monumented with a pine post, 18 ins. long, 4 ins. square, set in mound of stone, and mkd. 5 notches on S. and 1 on N. faces. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T9N R16W R15W S1 | S6 S12 | S7 1967 Bury original pine post cor. alongside iron post. Raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor. Land, rolling. Soil, gravelly. Timber, widely scattered juniper. Undergrowth, sagebrush and shadscale.
	N. 1° 03' W., bet. secs. 1 and 6. Over gently rolling bench land through widely scattered juniper timber and sagebrush and shadscale undergrowth.
0.50	Wash, 20 lks. wide, 3 ft. deep, drains N. 45° E.
40.13	The 1/4 sec. cor. of secs. 1 and 6, monumented with a pine post, 12 ins. long, 4 ins. square, set in mound of stone; no visible markings, but accepted as the original cor. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam, 24 ins. in the ground, with brass cap mkd. T9N R16W R15W ¼ S1 | S6 1967 Bury original stone cor. alongside iron post. Raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor.

Dependent Resurvey of the W. Bdy., T. 9 N., R. 15 W.

CHAINS	
	N. 0° 56' W., beginning new measurement.
40.12	The cor. of Tps. 9 and 10 N., Rs. 15 and 16 W., monumented with an iron post, 2½ ins. diam., set, mkd. and witnessed as described in the field notes of T. 10 N., R. 15 W., surveyed concurrently under this same group.
	Land, rolling. Soil, gravelly. Timber, widely scattered juniper. Undergrowth, shadscale and sagebrush.
	Dependent Resurvey of the Subdivision, T. 9 N., R. 15 W.
	Reestablishment of the Survey Executed by G. V. M. Boutelle in 1872.
	From the standard cor. of secs. 35 and 36, on the S. bdy. of the Tp., hereinbefore described.
	N. 1° 10' W., bet. secs. 35 and 36.
	Over gently rolling desert land through shadscale and sagebrush undergrowth.
15.00	Wash, 15 lks. wide, 2 ft. deep, drains S. 60° E.
39.75	Wash, 20 lks. wide, 3 ft. deep, drains S. 30° E.
40.18	Point for the 1/4 sec. cor. of secs. 35 and 36 at proportionate dist.; there is no remaining evidence of the original cor.
	Set an iron post, 30 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd. T9N R15W ¼ S35|S36 1967
	Deposit broken glass and set a steel fence post, 6 ft. long, alongside iron post.
52.55	Wash, 15 lks. wide, 3 ft. deep, drains S. 19° E.

Dependent Resurvey of the Subdivision, T. 9 N., R. 15 W.

CHAINS	
80.36	Point for the cor. of secs. 25, 26, 35 and 36 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T9N R15W S26 | S25 S35 | S36 1967 Deposit broken glass and set a steel fence post, 6 ft. long, alongside iron post. Land, gently rolling. Soil, clay. No timber. Undergrowth, shadscale and sagebrush.
	From the cor. of secs. 25, 30, 31 and 36, on the E. bdy. of the Tp., hereinbefore described. S. 89° 29' W., bet. secs. 25 and 36. Desc. over rolling land through shadscale and sagebrush undergrowth.
18.20	Wash, 40 lks. wide, 5 ft. deep, drains S. 30° W.
40.31	Point for the 1/4 sec. cor. of secs. 25 and 36 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T9N R15W ¼ S25 S36 1967 Deposit broken glass and set a steel fence post, 6 ft. long, alongside iron post. Continue descent over gently rolling land.
43.20	Trail road, bears N. 15° W. and S. 15° E.
80.62	The cor. of secs. 25, 26, 35 and 36. Land, rolling E. portion; gently rolling W. portion. Soil, clay. No timber. Undergrowth, shadscale and sagebrush.
	N. 0° 47' W., bet. secs. 25 and 26.

CHAINS	
	Over gently rolling land through shadscale and sagebrush undergrowth.
40.18	Point for the 1/4 sec. cor. of secs. 25 and 36 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd. T9N R15W ¼ S26 | S25 1967 Deposit broken glass and set a steel fence post, 6 ft. long, alongside iron post.
66.70	Trail road, bears N. 65° E. and S. 65° W.
80.36	Point for the cor. of secs. 23, 24, 25 and 26 at proportionate dist. Original pine post cor. lying loose on the ground. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T9N R15W S23 | S24 S26 | S25 1967 Bury original pine post cor. alongside iron post. Deposit broken glass and set a steel fence post, 6 ft. long, alongside iron post. Land, gently rolling. Soil, clay. No timber. Undergrowth, shadscale and sagebrush.
	From the cor. of secs. 19, 24, 25 and 30, on the E. bdy. of the Tp., hereinbefore described. S. 89° 27' W., bet. secs. 24 and 25. Desc. over gently rolling land through shadscale and sagebrush undergrowth.
40.28	Point for the 1/4 sec. cor. of secs. 24 and 25 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T9N R15W ¼ S24 S25 1967

CHAINS	
	Deposit broken glass and set a steel fence post, 6 ft. long, alongside iron post.
42.60	Trail road, bears N. 30° W. and S. 30° E.
80.56	The cor. of secs. 23, 24, 25 and 26.
	Land, gently rolling. Soil, sandy clay. No timber. Undergrowth, shadscale and sagebrush.
	N. 0° 57' W., bet. secs. 23 and 24.
	Over gently rolling desert land through shadscale and sagebrush undergrowth.
27.85	Wash, 20 lks. wide, 4 ft. deep, drains S. 60° W.
40.18	The 1/4 sec. cor. of secs. 23 and 24, monumented with a cedar post, 15 ins. long, 3 ins. square, plainly mkd. 1/4 on W. face.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T9N R15W ¼ S23 | S24 1967
	Bury original cedar post cor. alongside iron post.
	Set a steel fence post, 6 ft. long, alongside iron post.
	N. 0° 43' W., beginning new measurement.
39.60	Point for the cor. of secs. 13, 14, 23 and 24 at proportionate dist.; there is no remaining evidence of the original cor.
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T9N R15W S14 | S13 S23 | S24 1967
	Deposit broken glass and set a steel fence post, 6 ft. long, alongside iron post.

CHAINS	
	Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, shadscale and sagebrush.
	From the cor. of secs. 13, 18, 19 and 24, on the E. bdy. of the Tp., hereinbefore described. S. 89° 12' W., bet. secs. 13 and 24. Over gently rolling land through shadscale and sagebrush undergrowth.
29.60	Trail road, bears N. 50° W. and S. 50° E.
40.28	Point for the 1/4 sec. cor. of secs. 13 and 24 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T9N R15W ¼ S13/S24 1967 Deposit broken glass and set a steel fence post, 6 ft. long, alongside iron post.
80.56	The cor. of secs. 13, 14, 23 and 24. Land, gently rolling. Soil, sandy clay. No timber. Undergrowth, shadscale and sagebrush.
	N. 0° 36' W., bet. secs. 13 and 14. Over gently rolling land through shadscale and sagebrush undergrowth.
36.55	Abandoned Central Pacific Railroad grade, bears N. 62° 40' E. and S. 62° 40' W.
39.60	Point for the 1/4 sec. cor. of secs. 13 and 14 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T9N R15W ¼ S14|S13 1967 Deposit broken glass and set a steel fence post, 6 ft. long, alongside iron post.

Dependent Resurvey of the Subdivision, T. 9 N., R. 15 W.

CHAINS	
55.10	Wash, 35 lks. wide, 7 ft. deep, drains S. 5° W.
79.20	Point for the cor. of secs. 11, 12, 13 and 14 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T9N R15W S11 | S12 S14 | S13 1967 Deposit broken glass and set a steel fence post, 6 ft. long, alongside iron post. Land, gently rolling. Soil, sandy clay. No timber. Undergrowth, shadscale and sagebrush.
	From the cor. of secs. 7, 12, 13 and 18, on the E. bdy. of the Tp., hereinbefore described. S. 88° 18' W., bet. secs. 12 and 13. Over gently rolling land through shadscale and sagebrush undergrowth.
6.00	Abandoned Central Pacific Railroad grade, bears N. 1° 30' E. and S. 1° 30' W., curving S. 62° 40' W.
40.18	Point for the 1/4 sec. cor. of secs. 12 and 13 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T9N R15W ¼ — S12 S13 1967 Deposit broken glass and set a steel fence post, 6 ft. long, alongside iron post.
63.90	Old pipeline, bears N. 5° W. and S. 5° E.
65.60	Wash, 25 lks. wide, 6 ft. deep, drains irregularly S.
71.50	Old pipeline, bears N. 20° W. and S. 20° E.
76.90	Wash, 15 lks. wide, 10 ft. deep, drains irregularly S.
80.36	The cor. of secs. 11, 12, 13 and 14.

CHAINS	
	Land, gently rolling. Soil, sandy clay. No timber. Undergrowth, shadscale and sagebrush.
	N. 0° 50' W., bet. secs. 11 and 12. Over gently rolling land through shadscale and sagebrush undergrowth.
22.50	Old pipeline bears N. 20° W. and S. 20° E.
39.60	Point for the 1/4 sec. cor. of secs. 11 and 12 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T9N R15W ¼ S11 | S12 1967 Deposit broken glass and set a steel fence post, 6 ft. long, alongside iron post.
45.20	Wash, 15 lks. wide, 3 ft. deep, drains S. 28° W.
79.20	Point for the cor. of secs. 1, 2, 11 and 12 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T9N R15W S2 | S1 S11 | S12 1967 Deposit broken glass and set a steel fence post, 6 ft. long, alongside iron post. Land, gently rolling. Soil, sandy clay. No timber. Undergrowth, shadscale and sagebrush.
	From the cor. of secs. 1, 6, 7 and 12, on the E. bdy. of the Tp., hereinbefore described. S. 87° 26' W., bet. secs. 1 and 12. Over gently rolling land through shadscale and sagebrush undergrowth.
4.55	Abandoned Central Pacific Railroad grade, bears S. 1° 30' W. and curves N. 70° E.

Dependent Resurvey of the Subdivision, T. 9 N., R. 15 W.

CHAINS	
26.30	Old pipeline, bears N. 45° W. and S. 45° E.
40.22	Point for the 1/4 sec. cor. of secs. 1 and 12 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T9N R15W ¼ S1/S12 1967 Deposit broken glass and set a steel fence post, 6 ft. long, alongside iron post.
47.30	Wash, 15 lks. wide, 8 ft. deep, drains S. 45° W.
68.55	Old pipeline, bears nearly N. and S.
80.44	The cor. of secs. 1, 2, 11 and 12. Land, gently rolling. Soil, sandy clay. No timber. Undergrowth, shadscale and sagebrush.
	N. 0° 13' W., bet. secs. 1 and 2. Over gently rolling land through shadscale and sagebrush undergrowth.
15.85	Wash, 50 lks. wide, 7 ft. deep, drains S. 20° W.
19.60	Wash, 10 lks. wide, 3 ft. deep, drains S. 15° W.
39.59	The 1/4 sec. cor. of secs. 1 and 2, monumented with a pine stake, 12 ins. long, 3 ins. square, mkd. 1/4 on W. face. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T9N R15W ¼ S2|S1 1967 Bury original pine stake cor. alongside iron post. Set a steel fence post, 6 ft. long, alongside iron post.
	N. 0° 56' W., beginning new measurement.

CHAINS	
5.75	Wash, 35 lks. wide, 5 ft. deep, drains S. 35° E.
15.50	Old pipeline, bears N. 45° W. and S. 45° E.
38.95	Wash, 40 lks. wide, 8 ft. deep, drains irregularly S. 45° E.
43.16	The cor. of secs. 1, 2, 35 and 36, on the N. bdy. of the Tp., monumented with an iron post, 2½ ins. diam., set, mkd. and witnessed as described in the field notes of T. 10 N., R. 15 W., surveyed concurrently under this same group.
	Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, shadscale and sagebrush.
	From the standard cor. of secs. 34 and 35, on the S. bdy. of the Tp., hereinbefore described.
	N. 1° 03' W., bet. secs. 34 and 35.
	Over gently rolling land through shadscale and sagebrush undergrowth.
6.00	Wash, 20 lks. wide, 4 ft. deep, drains S. 63° W.
40.09	Point for the 1/4 sec. cor. of secs. 34 and 35 at proportionate dist.; there is no remaining evidence of the original cor.
	Set an iron post, 30 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd. T9N R15W ¼ S34 | S35 1967
	Deposit broken glass and set a steel fence post, 6 ft. long, alongside iron post.
80.18	Point for the cor. of secs. 26, 27, 34 and 35 at proportionate dist.; there is no remaining evidence of the original cor.
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T9N R15W S27 | S26 S34 | S35 1967
	Deposit broken glass and set a steel fence post.

Dependent Resurvey of the Subdivision, T. 9 N., R. 15 W.

CHAINS

6 ft. long, alongside iron post.

Land, gently rolling desert.
Soil, sandy clay.
No timber.
Undergrowth, shadscale and sagebrush.

From the cor. of secs. 25, 26, 35 and 36.

S. 89° 30' W., bet. secs. 26 and 35.

Over gently rolling land through shadscale and sagebrush undergrowth.

40.10 Point for the 1/4 sec. cor. of secs. 26 and 35 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T9N R15W

¼ S26 / S35

1967

Deposit broken glass and set a steel fence post, 6 ft. long, alongside iron post.

64.50 Wash, 25 lks. wide, 3 ft. deep, drains S. 2° E.

80.20 The cor. of secs. 26, 27, 34 and 35.

Land, gently rolling desert.
Soil, sandy clay.
No timber.
Undergrowth, shadscale and sagebrush.

N. 1° 04' W., bet. secs. 26 and 27.

Over gently rolling land through shadscale and sagebrush undergrowth.

20.15 Wash, 40 lks. wide, 5 ft. deep, drains S. 40° E.

29.80 Wash, 30 lks. wide, 5 ft. deep, drains S. 50° E.

40.09 Point for the 1/4 sec. cor. of secs. 26 and 27 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T9N R15W

¼

S27 | S26

1967

Set a steel fence post 6 ft. long alongside iron post.

CHAINS	
41.40	Wash, 10 lks. wide, 2 ft. deep, drains S. 20° E.
80.18	The cor. of secs. 22, 23, 26 and 27, monumented with a pine post, 30 ins. long, 4 ins. square, mkd. 2 notches on S. and E. faces. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T9N R15W S22 | S23 S27 | S26 1967 Bury original pine post cor. alongside iron post. Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, shadscale and sagebrush.
	From the cor. of secs. 23, 24, 25 and 26. S. 89° 18' W., bet. secs. 23 and 26. Over gently rolling land through shadscale and sagebrush undergrowth.
22.65	Wash, 10 lks, wide, 1 ft. deep, drains S. 15° W.
36.45	Wash, 30 lks. wide, 4 ft. deep, drains S. 14° E.
40.33	Point for the 1/4 sec. cor. of secs. 23 and 26 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T9N R15W ¼ S23 S26 1967 Deposit broken glass and set a steel fence post, 6 ft. long, alongside iron post.
58.50	Wash, 60 lks. wide, 12 ft. deep, drains S. 23° W.
80.66	The cor. of secs. 22, 23, 26 and 27. Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, shadscale and sagebrush.

Dependent Resurvey of the Subdivision, T. 9 N., R. 15 W.

CHAINS

N. 0° 27' W., bet. secs. 22 and 23.

Over gently rolling land through shadscale and sagebrush undergrowth.

1.70 Wash, 15 lks. wide, 2 ft. deep, drains S. 22° W.

39.97 The 1/4 sec. cor. of secs. 22 and 23, monumented with a pine post, 30 ins. long, 4 ins. square, dimly mkd. 1/4 S.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T9N R15W
¼
S22|S23
1967

Bury original pine post cor. alongside iron post.

N. 0° 38' W., beginning new measurement.

36.07 Abandoned Central Pacific Railroad grade, bears N. 62° 36' E. and S. 62° 36' W.

39.96 The cor. of secs. 14, 15, 22 and 23, monumented with a pine post, 30 ins. long, 4 ins. square, mkd. 3 notches on S. and 2 on E. faces.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T9N R15W
S15|S14
S22|S23
1967

Bury original pine post cor. alongside iron post.

Land, gently rolling desert.
Soil, sandy clay.
No timber.
Undergrowth, shadscale and sagebrush.

From the cor. of secs. 13, 14, 23 and 24.

S. 89° 24' W., bet. secs. 14 and 23.

Over gently rolling land through shadscale and sagebrush undergrowth.

CHAINS	
15.95	Wash, 10 lks. wide, 2 ft. deep, drains S. 85° W.
20.70	Wash, 10 lks. wide, 2 ft. deep, drains S. 65° W.
40.12	Point for the 1/4 sec. cor. of secs. 14 and 23 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T9N R15W ¼ S14/S23 1967 Deposit broken glass and set a steel fence post, 6 ft. long, alongside iron post.
46.40	Wash, 40 lks. wide, 6 ft. deep, drains S. 10° E.
51.20	Wash, 40 lks. wide, 5 ft. deep, drains S. 25° W.
72.38	Abandoned Central Pacific Railroad grade, bears N. 62° 36' E. and S. 62° 36' W.
80.24	The cor. of secs. 14, 15, 22 and 23. Land, gently rolling. Soil, sandy clay. No timber. Undergrowth, shadscale and sagebrush.
	N. 0° 40' W., bet. secs. 14 and 15. Over gently rolling land through shadscale and sagebrush undergrowth.
40.04	Point for the 1/4 sec. cor. of secs. 14 and 15 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T9N R15W ¼ S15|S14 1967 Deposit broken glass and set a steel fence post, 6 ft. long, alongside iron post.
80.08	Point for the cor. of secs. 10, 11, 14 and 15 at proportionate dist.; there is no remaining evidence of the original cor.

Dependent Resurvey of the Subdivision, T. 9 N., R. 15 W.

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T9N R15W

S10 | S11
S15 | S14

1967

Deposit broken glass and set a steel fence post, 6 ft. long, alongside iron post.

Land, gently rolling desert.
Soil, sandy clay.
No timber.
Undergrowth, shadscale and sagebrush.

From the cor. of secs. 11, 12, 13 and 14.

N. 89° 51' W., bet. secs. 11 and 14.

Over gently rolling land through shadscale and sagebrush undergrowth.

6.00 Wash, 15 lks. wide, 10 ft. deep, drains irregularly S.

10.50 Wash, 20 lks. wide, 5 ft. deep, drains irregularly S.

20.90 Wash, 15 lks. wide, 5 ft. deep, drains S. 45° W.
23.50 Wash, 20 lks. wide, 6 ft. deep, drains S. 30° E.
40.15 Point for the 1/4 sec. cor. of secs. 11 and 14 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T9N R15W

¼ S11
S14

1967

Deposit broken glass and set a steel fence post, 6 ft. long, alongside iron post.

80.30 The cor. of secs. 10, 11, 14 and 15.

Land, gently rolling desert.
Soil, sandy clay.
No timber.
Undergrowth, shadscale and sagebrush.

N. 0° 56' W., bet. secs. 10 and 11.

Over gently rolling desert land through shadscale and sagebrush undergrowth.

CHAINS	
40.04	Point for the 1/4 sec. cor. of secs. 10 and 11 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T9N R15W ¼ S10 | S11 1967 Deposit broken glass and set a steel fence post, 6 ft. long, alongside iron post.
42.15	Wash, 15 lks. wide, 1 ft. deep, drains S. 35° W.
80.08	Point for the cor. of secs. 2, 3, 10 and 11 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T9N R15W S3 | S2 S10 | S11 1967 Deposit broken glass and set a steel fence post, 6 ft. long, alongside iron post. Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, shadscale and sagebrush.
	From the cor. of secs. 1, 2, 11 and 12. N. 89° 14' W., bet. secs. 2 and 11. Over gently rolling land through shadscale and sagebrush undergrowth.
7.60	Wash, 10 lks. wide, 4 ft. deep, drains irregularly S.
21.50	Old pipeline, bears N. 20° W. and S. 20° E.
24.50	Wash, 50 lks. wide, 10 ft. deep, drains S.
40.28	Point for the 1/4 sec. cor. of secs. 2 and 11 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

Dependent Resurvey of the Subdivision, T. 9 N., R. 15 W.

CHAINS	
	T9N R15W ¼ S2/S11 1967
	Deposit broken glass and set a steel fence post, 6 ft. long, alongside iron post.
41.50	Wash, 20 lks. wide, 4 ft. deep, drains S. 10° E.
61.00	Wash, 15 lks. wide, 5 ft. deep, drains S. 10° E.
75.30	Wash, 10 lks. wide, 2 ft. deep, drains S.
80.56	The cor. of secs. 2, 3, 10 and 11.
	Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, shadscale and sagebrush.
	N. 0° 19' W., bet. secs. 2 and 3.
	Over gently rolling land through shadscale and sagebrush undergrowth.
3.15	Wash, 25 lks. wide, 3 ft. deep, drains S. 55° W.
5.05	Wash, 20 lks. wide, 3 ft. deep, drains S. 50° W.
40.04	Point for the 1/4 sec. cor. of secs. 2 and 3, at proportionate dist.; there is no remaining evidence of the original cor.
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T9N R15W ¼ S3|S2 1967
80.72	The cor. of secs. 2, 3, 34 and 35, on the N. bdy. of the Tp., monumented with an iron post, 2½ ins. diam., set, mkd. and witnessed as described in the field notes of T. 10 N., R. 15 W. surveyed concurrently under this same group.
	Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, shadscale and sagebrush.
	From the standard cor. of secs. 33 and 34, on the S. bdy. of the Tp., hereinbefore described.
	N. 1° 03' W., bet. secs. 33 and 34.
	Over gently rolling land through shadscale and sagebrush undergrowth.

CHAINS	
4.50	Wash, 10 lks. wide, 3 ft. deep, drains S. 81° E.
15.60	Wash, 15 lks. wide, 3 ft. deep, drains S. 40° W.
40.29	Point for the 1/4 sec. cor. of secs. 33 and 34 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T9N R15W ¼ S33 | S34 1967
80.58	The cor. of secs. 27, 28, 33 and 34, monumented with a redwood post, 24 ins. long, 4 ins. square, partially decayed, with dim scribed marks on one side. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T9N R15W S28 | S27 S33 | S34 1967 Bury original redwood post cor. alongside iron post. Deposit broken glass and set a steel fence post, 6 ft. long, alongside iron post. Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, shadscale and sagebrush.
	From the cor. of secs. 26, 27, 34 and 35. S. 89° 06' W., bet. secs. 27 and 34. Over gently rolling land through shadscale and sagebrush undergrowth.
40.13	Point for the 1/4 sec. cor. of secs. 27 and 34 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T9N R15W ¼ S27 S34 1967

Dependent Resurvey of the Subdivision, T. 9 N., R. 15 W.

CHAINS	
45.50	Trail road with underground pipeline to Lemay Station, along W. side, bears N. 15° W. and S. 15° E.
50.45	Wash, 50 lks. wide, 6 ft. deep, drains S. 20° E.
80.26	The cor. of secs. 27, 28, 33 and 34.
	Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, shadscale and sagebrush.

N. 0° 29' W., bet. secs. 27 and 28.

Over gently rolling land through shadscale and sagebrush undergrowth.

39.64 Point for the 1/4 sec. cor. of secs. 27 and 28 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T9N R15W
¼
S28 | S27
1967

Raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor.

79.28 The cor. of secs. 21, 22, 27 and 28, monumented with a badly decayed redwood post, 18 ins. long, 4 ins. square.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T9N R15W

S21 | S22
S28 | S27

1967

Bury original redwood post cor. alongside iron post.

Raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor.

Land, gently rolling desert.
Soil, sandy clay.
No timber.
Undergrowth, shadscale and sagebrush.

Dependent Resurvey of the Subdivision, T. 9 N., R. 15 W.

CHAINS	
	From the cor. of secs. 22, 23, 26 and 27.
	S. 89° 11' W., bet. secs. 22 and 27.
	Over gently rolling land through shadscale and sagebrush undergrowth.
0.70	Wash, drains S. 22° W.
33.00	Wash, drains S. 15° E.
39.81	The 1/4 sec. cor. of secs. 22 and 27, monumented with a redwood post, 18 ins. long, 4 ins. square, plainly scribed 1/4 S.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T9N R15W ¼ S22/S27 1967
	Bury original redwood post cor. alongside iron post.
	Set a steel fence post, 6 ft. long, alongside iron post.
	S. 87° 59' W., beginning new measurement.
29.00	Underground pipeline to Lemay Station with trail road along E. side, bears N. 15° W. and S. 15° E.
39.71	The cor. of secs. 21, 22, 27 and 28.
	Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, shadscale and sagebrush.
	North, bet. secs. 21 and 22.
	Over gently rolling land through shadscale and sagebrush undergrowth.
37.15	Abandoned Central Pacific Railroad grade, bears N. 62° 40' E. and S. 62° 40' W.; also old townsite of Watercress.
39.63	Point for the 1/4 sec. cor. of secs. 21 and 22 at proportionate dist.; there is no remaining evidence of the original cor.
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

Dependent Resurvey of the Subdivision, T. 9 N., R. 15 W.

CHAINS	
	T9N R15W ¼ S21 | S22 1967 Raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor.
40.32	Underground pipeline to Lemay Station with trail road along E. side, bears N. 15° W. and S. 15° E.
42.00	Leave old townsite of Watercress.
66.55	Wash, 20 lks. wide, 5 ft. deep, drains S. 75° E.
79.26	The cor. of secs. 15, 16, 21 and 22, monumented with a redwood post, 18 ins. long, 4 ins. square, firmly set and plainly scribed 3 notches on S. and E. faces. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T9N R15W S16 | S15 S21 | S22 1967 Bury original redwood post cor. alongside iron post. Raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor. Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, shadscale and sagebrush.
	From the cor. of secs. 14, 15, 22 and 23. S. 88° 02' W., bet. secs. 15 and 22. Over gently rolling desert land through shadscale and sagebrush undergrowth.
38.50	Wash, drains irregularly S.
39.41	Point for the 1/4 sec. cor. of secs. 15 and 22 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T9N R15W ¼ S15 S22 1967

Dependent Resurvey of the Subdivision, T. 9 N., R. 15 W.

CHAINS	
	Set a steel fence post, 6 ft. long, alongside iron post.
78.82	The cor. of secs. 15, 16, 21 and 22.
	Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, shadscale and sagebrush.
	N. 1° 33' W., bet. secs. 15 and 16.
	Over gently rolling land through shadscale and sagebrush undergrowth.
40.30	Point for the 1/4 sec. cor. of secs. 15 and 16 at proportionate dist.; there is no remaining evidence of the original cor.
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T9N R15W ¼ S16 | S15 1967
	Raise a mound of stone 3 ft. base 1½ ft. high, W. of cor.
75.10	Wash, 10 lks. wide, 3 ft. deep, drains irregularly S. 40° E.
80.60	Point for the cor. of secs. 9, 10, 15 and 16 at proportionate dist.; there is no remaining evidence of the original cor.
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T9N R15W S9 | S10 S16 | S15 1967
	Raise a mound of stone, 3 ft. base, 1½ ft. high, W. of cor.
	Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, shadscale and sagebrush.
	From the cor. of secs. 10, 11, 14 and 15.
	S. 88° 22' W., bet. secs. 10 and 15.

CHAINS	
	Over gently rolling land through shadscale and sagebrush undergrowth.
12.10	Wash, drains irregularly S.
40.06	Point for the 1/4 sec. cor. of secs. 10 and 15 at proportionate dist.; there is no remaining evidence of the original cor.
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T9N R15W ¼ S10 S15 1967
	Deposit broken glass and set a steel fence post, 6 ft. long, alongside iron post.
41.10	Wash, drains S. 15° E.
72.10	Wash, drains S. 45° E.
80.12	The cor. of secs. 9, 10, 15 and 16.
	Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, shadscale and sagebrush.
	N. 0° 45' W., bet. secs. 9 and 10.
	Over gently rolling land through shadscale and sagebrush undergrowth.
40.29	Point for the 1/4 sec. cor. of secs. 9 and 10 at proportionate dist.; there is no remaining evidence of the original cor.
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T9N R15W ¼ S9 | S10 1967
	Raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor.
80.58	Point for the cor. of secs. 3, 4, 9 and 10 at proportionate dist.; there is no remaining evidence of the original cor.
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

Dependent Resurvey of the Subdivision, T. 9 N., R. 15 W.

CHAINS	
	T9N R15W S4 | S3 S9 | S10 1967 Raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor. Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, shadscale and sagebrush.
	From the cor. of secs. 2, 3, 10 and 11. S. 88° 29' W., bet. secs. 3 and 10. Over gently rolling land through shadscale and sagebrush undergrowth.
3.55	Trail road, bears irregularly N. and S.; wash, drains S. 40° W.
12.15	Wash, 10 lks. wide, 5 ft. deep, drains S.
27.55	Wash, 10 lks. wide, 4 ft. deep, drains S.
38.65	Wash, 10 lks. wide, 1 ft. deep, drains S.
39.95	Point for the 1/4 sec. cor. of secs. 3 and 10 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T9N R15W ¼ S3 S10 1967 Deposit broken glass and set a steel fence post, 6 ft. long, alongside iron post.
49.15	Top of sandy knoll, 10 ft. high, 3.00 chs. wide.
54.05	Wash, 15 lks. wide, 4 ft. deep, drains S.
59.25	Wash, 15 lks. wide, 2 ft. deep, drains S.
79.90	The cor. of secs. 3, 4, 9 and 10. Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, shadscale and sagebrush.
	N. 0° 26' W., bet. secs. 3 and 4.

Dependent Resurvey of the Subdivision, T. 9 N., R. 15 W.

CHAINS	
	Over gently rolling land through shadscale and sagebrush undergrowth.
15.55	Wash, 10 lks. wide, 2 ft. deep, drains S. 75° E.
40.29	Point for the 1/4 sec. cor. of secs. 3 and 4 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T9N R15W ¼ S4|S3 1967 Raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor.
81.38	The cor. of secs. 3, 4, 33 and 34, on the N. bdy. of the Tp., monumented with an iron post, 2½ ins. diam., set, mkd. and witnessed as described in the field notes of T. 10 N., R. 15 W., surveyed concurrently under this same group. Land, gently rolling. Soil, sandy clay. No timber. Undergrowth, shadscale and sagebrush.
	From the standard cor. of secs. 32 and 33, on the S. bdy. of the Tp., hereinbefore described. N. 1° 06' W., bet. secs. 32 and 33. Over gently rolling land through shadscale and sagebrush undergrowth.
40.24	Point for the 1/4 sec. cor. of secs. 32 and 33 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T9N R15W ¼ S32|S33 1967 Deposit broken glass and set a steel fence post, 6 ft. long, alongside iron post.

CHAINS	
80.48	Point for the cor. of secs. 28, 29, 32 and 33 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T9N R15W S29 | S28 S32 | S33 1967 Deposit broken glass and set a steel fence post, 6 ft. long, alongside iron post. Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, shadscale and sagebrush.
	From the cor. of secs. 27, 28, 33 and 34. S. 89° 15' W., bet. secs. 28 and 33. Over gently rolling land through shadscale and sagebrush undergrowth.
5.60	Wash, 20 lks. wide, 2 ft. deep, drains S. 20° W.
31.50	Wash, 15 lks. wide, 3 ft. deep, drains S. 40° E.
40.08	Point for the 1/4 sec. cor. of secs. 28 and 33 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T9N R15W ¼ S28 / S33 1967 Deposit broken glass and set a steel fence post, 6 ft. long, alongside iron post.
42.80	Wash, 10 lks. wide, 1 ft. deep, drains S. 2° W.
74.35	Wash, 45 lks. wide, 5 ft. deep, drains S. 3° E.
80.16	The cor. of secs. 28, 29, 32 and 33. Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, shadscale and sagebrush.
	N. 0° 50' W., bet. secs. 28 and 29. Over gently rolling land through shadscale and sagebrush undergrowth.

CHAINS	
12.20	Wash, 10 lks. wide, 3 ft. deep, drains S. 47° E.
22.70	Wash, 15 lks. wide, 3 ft. deep, drains S. 16° E.
23.05	Wash, 20 lks. wide, 3 ft. deep, drains S. 32° W.
40.24	The 1/4 sec. cor. of secs. 28 and 29, monumented with a redwood post, 24 ins. long, 4 ins. square, plainly scribed 1/4 S. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T9N R15W ¼ S29|S28 1967 Bury original redwood post cor. alongside iron post. Raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor.
	N. 0° 27' W., beginning new measurement.
35.60	Abandoned Central Pacific Railroad grade, bears N. 62° 51' E. and S. 62° 51' W.
40.03	Point for the cor. of secs. 20, 21, 28 and 29 at proportionate dist. falls in wash, 30 lks. wide, 6 ft. deep, drains S. 10° E. and deemed unsafe to perpetuate. There is no remaining evidence of the original cor. Point selected for the witness cor. bears S. 88° 41' W., 15 lks. dist., hereinafter described. Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, shadscale and sagebrush.
	From the cor. of secs. 21, 22, 27 and 28. N. 88° 41' W., bet. secs. 21 and 28. Over gently rolling land through shadscale and sagebrush undergrowth.
40.42	The 1/4 sec. cor. of secs. 21 and 28, monumented with a redwood post, 18 ins. long, 4 ins. square, plainly scribed 1/4 S. At the cor. point

CHAINS	
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T9N R15W ¼ S21 / S28 1967 Bury original redwood post cor. alongside iron post. Raise a mound of stone, 2½ ft. base, 1½ ft. high, N. of cor.
	S. 88° 42' W., beginning new measurement.
11.35	Wash, 15 lks. wide, 3 ft. deep, drains S. 25° E.
29.75	Wash, 10 lks. wide, 2 ft. deep, drains S. 30° E.
30.96	Abandoned Central Pacific Railroad grade, bears N. 62° 40' E. and S. 62° 40' W.
39.89	True point for the cor. of secs. 20, 21, 28 and 29. Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, shadscale and sagebrush.
	N. 0° 02' W., bet. secs. 20 and 21. Over gently rolling land through shadscale and sagebrush undergrowth.
40.03	Point for the 1/4 sec. cor. of secs. 20 and 21 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T9N R15W ¼ S20 | S21 1967 Deposit broken glass and set a steel fence post, 6 ft. long, alongside iron post.
60.05	Trail road, bears N. 80° W. and S. 80° E.
80.06	Point for the cor. of secs. 16, 17, 20 and 21 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

Dependent Resurvey of the Subdivision, T. 9 N., R. 15 W.

CHAINS	
	T9N R15W S17 | S16 S20 | S21 1967 Deposit broken glass and set a steel fence post, 6 ft. long, alongside iron post. Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, shadscale and sagebrush.
	From the cor. of secs. 15, 16, 21 and 22. N. 89° 20' W., bet. secs. 16 and 21. Over nearly level desert land through shadscale and sagebrush undergrowth.
12.90	Trail road, with underground pipeline to Lemay Station, along W. side, bears N. 15° W. and S. 15° E.
13.20	Wash, 15 lks. wide, 3 ft. deep, drains S. 15° E.
40.09	Point for the 1/4 sec. cor. of secs. 16 and 21 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T9N R15W ¼ S16 S21 1967 Deposit broken glass and set a steel fence post, 6 ft. long, alongside iron post.
75.50	Wash, drains S. 20° E.
80.18	The cor. of secs. 16, 17, 20 and 21. Land, nearly level desert. Soil, clay. No timber. Undergrowth, shadscale and sagebrush.
	N. 1° 45' W., bet. secs. 16 and 17. Over gently rolling land through shadscale and sagebrush undergrowth.
11.15	Wash, 10 lks. wide, 1 ft. deep, drains S. 20° E.
40.04	Point for the 1/4 sec. cor. of secs. 16 and 17 at proportionate dist.; there is no remaining evidence of the original cor.

CHAINS	
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T9N R15W ¼ S17|S16 1967 Deposit broken glass and set a steel fence post, 6 ft. long, alongside iron post.
80.08	Point for the cor. of secs. 8, 9, 16 and 17 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T9N R15W S8|S9 S17|S16 1967 Raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor. Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, shadscale and sagebrush.
	From the cor. of secs. 9, 10, 15 and 16. N. 89° 45' W., bet. secs. 9 and 16. Over gently rolling desert land through shadscale and sagebrush undergrowth.
5.05	Wash, 10 lks. wide, 3 ft. deep, drains S. 40° E.
29.40	Trail road, bears N. 15° W. and S. 15° E.
29.80	Wash, 10 lks. wide, 2 ft. deep, drains S. 15° E.
30.20	Underground pipeline to Lemay Station, bears N. 15° W. and S. 15° E.
31.70	N. edge of stock pond, 3.00 chs. long, 2.00 chs. wide, is 2.50 chs. S. of line.
40.28	Point for the 1/4 sec. cor. of secs. 9 and 16 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T9N R15W ¼ S9 S16 1967

CHAINS	
	Raise a mound of stone, 2½ ft. base, 1½ ft. high, N. of cor.
60.55	Wash, 15 lks. wide, 3 ft. deep, drains S. 20° E.
80.56	The cor. of secs. 8, 9, 16 and 17.
	Land, gently rolling. Soil, sandy clay. No timber. Undergrowth, shadscale and sagebrush.
	N. 0° 34' W., bet. secs. 8 and 9.
	Over gently rolling land through shadscale and sagebrush undergrowth.
40.03	Point for the 1/4 sec. cor. of secs. 8 and 9 at proportionate dist.; there is no remaining evidence of the original cor.
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T9N R15W ¼ S8 | S9 1967
	Raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor.
69.95	Wash, 15 lks. wide, 3 ft. deep, drains S. 45° E.
72.85	Wash, 20 lks. wide, 5 ft. deep, drains S. 20° E.
80.06	The cor. of secs. 4, 5, 8 and 9, monumented with the remains of redwood post, badly decayed. This point is harmoniously related with existing original cors., and is accepted as the original cor. point.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T9N R15W S5 | S4 S8 | S9 1967
	Bury remains of original redwood post alongside iron post.
	Raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor.
	Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, shadscale and sagebrush.

CHAINS	
	From the cor. of secs. 3, 4, 9 and 10.
	S. 89° 50' W., bet. secs. 4 and 9.
	Over gently rolling land through shadscale and sagebrush undergrowth.
40.10	Point for the 1/4 sec. cor. of secs. 4 and 9 at proportionate dist.; there is no remaining evidence of the original cor.
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T9N R15W ¼ S4/S9 1967
	Raise a mound of stone, 2½ ft. base, 1½ ft. high, N. of cor.
50.10	Trail road, bears N. 15° W. and S. 15° E.
51.00	Underground pipeline to Lemay Station, bears N. 15° W. and S. 15° E.
73.05	Wash, 15 lks. wide, 5 ft. deep, drains S.
80.20	The cor. of secs. 4, 5, 8 and 9.
	Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, shadscale and sagebrush.
	N. 0° 32' W., bet. secs. 4 and 5.
	Over gently rolling land through shadscale and sagebrush undergrowth.
19.90	Wash, drains S. 45° E.
40.03	Point for the 1/4 sec. cor. of secs. 4 and 5 at proportionate dist.; there is no remaining evidence of the original cor.
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T9N R15W ¼ S5|S4 1967
	Raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor.
55.00	Wash, 30 lks. wide, 3 ft. deep, drains S. 45° E.

Dependent Resurvey of the Subdivision, T. 9 N., R. 15 W.

CHAINS	
80.55	The cor. of secs. 4, 5, 32 and 33, on the N. bdy. of the Tp., monumented with an iron post, 2½ ins. diam., set, mkd. and witnessed as described in the field notes of T. 10 N., R. 15 W., surveyed concurrently under this same group. Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, shadscale and sagebrush.
	From the standard cor. of secs. 31 and 32, on the S. bdy. of the Tp., hereinbefore described. N. 1° 14' W., bet. secs. 31 and 32. Over gently rolling land through shadscale and sagebrush undergrowth.
40.06	Point for the 1/4 sec. cor. of secs. 31 and 32 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T9N R15W ¼ S31 | S32 1967
80.12	The cor. of secs. 29, 30, 31 and 32, monumented with a redwood post, 18 ins. long, 4 ins. square, plainly scribed 5 notches on one side. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T9N R15W S30 | S29 S31 | S32 1967 Bury original redwood post cor. alongside iron post.

CHAINS	
	Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, shadscale and sagebrush.
	From the cor. of secs. 28, 29, 32 and 33. S. 89° 00' W., bet. secs. 29 and 32. Over gently rolling land through shadscale and sagebrush undergrowth.
14.00	Wash, drains S.
38.00	Wash, drains S. 20° E.
40.13	Point for the 1/4 sec. cor. of secs. 29 and 32 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T9N R15W ¼ S29/S32 1967 Deposit broken glass and set a steel fence post, 6 ft. long, alongside iron post.
77.55	Wash, 10 lks. wide, 2 ft. deep, drains S. 25° E.
80.26	The cor. of secs. 29, 30, 31 and 32. Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, shadscale and sagebrush.
	S. 88° 50' W., bet. secs. 30 and 31. Over gently rolling land through shadscale and sagebrush undergrowth.
39.93	The 1/4 sec. cor. of secs. 30 and 31, monumented with a pine post, 18 ins. long, 4 ins. square, plainly mkd. 1/4 S. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T9N R15W ¼ S30/S31 1967

CHAINS	
	Bury original pine post cor. alongside iron post. Set a steel fence post, 6 ft. long, alongside iron post.
	S. 89° 53' W., beginning new measurement.
1.70	Trail road, bears N. 15° W. and S. 15° E.
10.20	Wash, 25 lks. wide, 4 ft. deep, drains S. 50° E.
28.00	Wash, drains S. 30° E.
32.45	Abandoned Central Pacific Railroad grade, bears N. 62° 40' E. and S. 62° 40' W.
39.67	The cor. of secs. 25, 30, 31 and 36, on the W. bdy. of the Tp., hereinbefore described. Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, shadscale and sagebrush.
	From the cor. of secs. 29, 30, 31 and 32. N. 0° 29' W., bet. secs. 29 and 30. Over gently rolling land through shadscale and sagebrush undergrowth.
36.43	Abandoned Central Pacific Railroad grade, bears N. 62° 40' E. and S. 62° 40' W.
40.00	The 1/4 sec. cor. of secs. 29 and 30, monumented with a redwood post, 24 ins. long, 4 ins. square, partially decayed and mkd. 1/4 S. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T9N R15W ¼ S30|S29 1967 Bury original redwood post cor. alongside iron post. Raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor.
	N. 0° 01' E., beginning new measurement.

CHAINS	
40.25	The cor. of secs. 19, 20, 29 and 30, monumented with a redwood post, 18 ins. long, 4 ins. square, lying on the ground, with dim scribed marks on one side. This point is harmoniously related with existing original cors. and is accepted as the true cor. point. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T9N R15W S19 | S20 S30 | S29 1967 Bury original redwood post cor. alongside iron post. Raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor. Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, shadscale and sagebrush.
	From the true point for the cor. of secs. 20, 21, 28 and 29. S. 88° 41' W., bet. secs. 20 and 29. Over gently rolling land through shadscale and sagebrush undergrowth.
0.15	Point selected for the witness cor. of secs. 20, 21, 28 and 29. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T9N R15W S20 | S21 W S29 | S28 C 1967 Raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor.
40.26	The 1/4 sec. cor. of secs. 20 and 29, monumented with a redwood post, 18 ins. long, 4 ins. square, badly decayed, with no visible scribe marks. I accept this as the original cor. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

Dependent Resurvey of the Subdivision, T. 9 N., R. 15 W.

CHAINS	
	T9N R15W ¼ S20/S29 1967 Bury original redwood post cor. alongside iron post.
	S. 89° 13' W., beginning new measurement.
39.50	The cor. of secs. 19, 20, 29 and 30. Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, shadscale and sagebrush.
	S. 89° 20' W., bet. secs. 19 and 30. Over gently rolling desert land through shadscale and sagebrush undergrowth.
39.80	Point for the 1/4 sec. cor. of secs. 19 and 30 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T9N R15W ¼ S19/S30 1967 Deposit broken glass and set a steel fence post, 6 ft. long, alongside iron post.
80.22	The cor. of secs. 19, 24, 25 and 30, on the W. bdy. of the Tp., hereinbefore described. Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, shadscale and sagebrush.
	From the cor. of secs. 19, 20, 29 and 30. N. 0° 30' W., bet. secs. 19 and 20. Over gently rolling land through shadscale and sagebrush undergrowth.
40.15	Point for the 1/4 sec. cor. of secs. 19 and 20 at proportionate dist.; there is no remaining evidence of the original cor.

CHAINS	
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T9N R15W ¼ S19 | S20 1967 Deposit broken glass and set a steel fence post, 6 ft. long, alongside iron post.
80.30	Point for the cor. of secs. 17, 18, 19 and 20 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T9N R15W S18 | S17 S19 | S20 1967 Deposit broken glass and set a steel fence post, 6 ft. long, alongside iron post. Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, shadscale and sagebrush.
	From the cor. of secs. 16, 17, 20 and 21. S. 88° 59' W., bet. secs. 17 and 20. Over gently rolling land through shadscale and sagebrush undergrowth.
40.23	Point for the 1/4 sec. cor. of secs. 17 and 20 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T9N R15W ¼ S17 / S20 1967 Deposit broken glass and set a steel fence post, 6 ft. long, alongside iron post.
77.90	Trail road, bears N. 81° W. and S. 81° E.
80.46	The cor. of secs. 17, 18, 19 and 20.

Dependent Resurvey of the Subdivision, T. 9 N., R. 15 W.

CHAINS	
	Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, shadscale and sagebrush.
	S. 89° 23' W., bet. secs. 18 and 19. Over gently rolling land through shadscale and sagebrush undergrowth.
40.01	Point for the 1/4 sec. cor. of secs. 18 and 19 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T9N R15W ¼ S18/S19 1967 Deposit broken glass and set a steel fence post, 6 ft. long, alongside iron post. Asc. 75 ft. over gently rolling land.
68.65	Wash, 45 lks. wide, 4 ft. deep, drains S. 28° E.
70.10	State Highway No. 70, bears N. 39° 35' E. and S. 39° 35' W.
73.93	Transmission line, parallel to highway.
80.76	The cor. of secs. 13, 18, 19 and 24, on the W. bdy. of the Tp., hereinbefore described. Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, shadscale and sagebrush.
	From the cor. of secs. 17, 18, 19 and 20. N. 1° 32' W., bet. secs. 17 and 18. Over gently rolling land through shadscale and sagebrush undergrowth.
1.45	Trail road, bears N. 80° W. and S. 80° E.
40.16	Point for the 1/4 sec. cor. of secs. 17 and 18 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

CHAINS	
	T9N R15W ¼ S18 | S17 1967 Deposit broken glass and set a steel fence post, 6 ft. long, alongside iron post.
80.32	Point for the cor. of secs. 7, 8, 17 and 18 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T9N R15W S7 | S8 S18 | S17 1967 Deposit broken glass and set a steel fence post, 6 ft. long, alongside iron post. Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, shadscale and sagebrush.
	From the cor. of secs. 8, 9, 16 and 17. S. 89° 09' W., bet. secs. 8 and 17. Over gently rolling land through shadscale and sagebrush undergrowth.
35.00	Wash, drains S. 25° E.
40.02	Point for the 1/4 sec. cor. of secs. 8 and 17 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T9N R15W ¼ S8 S17 1967 Deposit broken glass and set a steel fence post, 6 ft. long, alongside iron post.
80.04	The cor. of secs. 7, 8, 17 and 18. Land, gently rolling. Soil, sandy clay. No timber. Undergrowth, shadscale and sagebrush.

Dependent Resurvey of the Subdivision, T. 9 N., R. 15 W.

CHAINS	
	S. 89° 22' W., bet. secs. 7 and 18.
	Over gently rolling land through shadscale and sagebrush undergrowth.
15.75	State Highway No. 70, bears N. 14° 50' E. and S. 14° 50' W.
19.68	Transmission line, parallel to highway.
29.75	Trail road, bears N. 45° E. and S. 45° W.; enter widely scattered timber.
36.40	Old gravel pit, 5 chs. diam.
39.98	Point for the 1/4 sec. cor. of secs. 7 and 18 at proportionate dist.; there is no remaining evidence of the original cor.
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T9N R15W ¼ S7/S18 1967
	Deposit broken glass and set a steel fence post, 6 ft. long, alongside iron post.
	Asc. 110 ft. over gently rolling E. slope.
80.26	The cor. of secs. 7, 12, 13 and 18, on the W. bdy. of the Tp., hereinbefore described.
	Land, gently rolling desert. Soil, gravelly. Timber, widely scattered juniper W. portion. Undergrowth, shadscale and sagebrush.
	From the cor. of secs. 7, 8, 17 and 18.
	N. 0° 39' W., bet. secs. 7 and 8.
	Over gently rolling land through shadscale and sagebrush undergrowth.
37.60	Wash, 10 lks. wide, 1 ft. deep, drains S. 73° E.
40.15	Point for the 1/4 sec. cor. of secs. 7 and 8 at proportionate dist.; there is no remaining evidence of the original cor.
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T9N R15W ¼ S7|S8 1967

CHAINS	
	Set a steel fence post, 6 ft. long, alongside iron post.
58.23	State Highway No. 70, bears N. 14° 50' E. and S. 14° 50' W.
65.53	Transmission line, parallel to highway.
72.45	Wash, 15 lks. wide, 1 ft. deep, drains S. 82° E.
73.75	Trail road, bears N. 60° W. and S. 70° E.
80.30	Point for the cor. of secs. 5, 6, 7 and 8 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T9N R15W S6 | S5 S7 | S8 1967 Deposit broken glass and set a steel fence post, 6 ft. long, alongside iron post. Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, shadscale and sagebrush.
	From the cor. of secs. 4, 5, 8 and 9. S. 89° 19' W., bet. secs. 5 and 8. Over gently rolling land through shadscale and sagebrush undergrowth.
2.55	Wash, 20 lks. wide, 5 ft. deep, drains S. 20° E.
9.80	Wash, 15 lks. wide, 3 ft. deep, drains S. 45° E.
40.06	Point for the 1/4 sec. cor. of secs. 5 and 8 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T9N R15W ¼ S5 / S8 1967 Deposit broken glass and set a steel fence post, 6 ft. long, alongside iron post.
70.10	Wash, drains S. 60° E.

Dependent Resurvey of the Subdivision, T. 9 N., R. 15 W.

CHAINS	
74.02	State Highway No. 70, bears N. 14° 50' E. and S. 14° 50' W.
76.27	Transmission line, parallel to highway.
80.12	The cor. of secs. 5, 6, 7 and 8. Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, shadscale and sagebrush.
	S. 89° 25' W., bet. secs. 6 and 7. Over gently rolling land through shadscale and sagebrush undergrowth.
20.15	Trail road, bears nearly N. and S.
40.16	Point for the 1/4 sec. cor. of secs. 6 and 7 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T9N R15W ¼ S6 / S7 1967 Deposit broken glass and set a steel fence post, 6 ft. long, alongside iron post. Asc. 190 ft. over gently rolling NE. slope. Enter widely scattered timber.
80.60	The cor. of secs. 1, 6, 7 and 12, on the W. bdy. of the Tp., hereinbefore described. Land, gently rolling desert. Soil, sandy clay. Timber, widely scattered juniper W. portion. Undergrowth, shadscale and sagebrush.
	From the cor. of secs. 5, 6, 7 and 8. N. 0° 48' W., bet. secs. 5 and 6. Over gently rolling land through shadscale and sagebrush undergrowth.
7.95	Wash, 10 lks. wide, 1 ft. deep, drains S. 52° E.
16.75	Wash, 10 lks. wide, 2 ft. deep, drains S. 54° E.
40.15	Point for the 1/4 sec. cor. of secs. 5 and 6 at proportionate dist.; there is no remaining evidence of the original cor.

Dependent Resurvey of the Subdivision, T. 9 N., R. 15 W.

CHAINS	
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T9N R15W ¼ S6 | S5 1967 Set a steel fence post, 6 ft. long, alongside iron post.
80.48	The cor. of secs. 5, 6, 31 and 32, on the N. bdy. of the Tp., monumented with an iron post, 2½ ins. diam., set, mkd. and witnessed as described in the field notes of T. 10 N., R. 15 W., surveyed concurrently under this same group. Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, shadscale and sagebrush.

General Description

Township 9 North, Range 15 West is located about 30 miles south of Park Valley, Utah. It is mostly gently rolling desert land covered with shadscale and sagebrush undergrowth, with widely scattered juniper timber in the northwest corner. The soil is sandy clay. No water was noted in the township except the pipeline to Lemay Station, which enters the township on the north boundary of section 4, and bears southeasterly through the township leaving on the south boundary of section 34. The Central Pacific Railroad, now abandoned, enters the township at the northeast corner of section 12, and bears southwesterly, leaving the township at the northwest corner of section 31. Utah State Highway No. 70 enters the township at the north boundary of section 5, and bears southwesterly, leaving the township at the west boundary of section 19. There are several trail roads in the township. The old townsite of Watercress is located around the 1/4 section corner of sections 21 and 22, and the old townsite of Terrace is located in section 13. The elevation of the township is about 4,500 feet above sea level.

Blank

Page

Form 9180-8
(August 1967)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

233

FIELD ASSISTANTS

NAMES	CAPACITY
Weldon G. Larson	Surveying Aid
Alvin L. Bishop	Surveying Aid
Barry W. Horton	Surveying Aid
Lawrence J. Sullivan	Surveying Aid
Roy S. Muniz	Surveying Aid

234

CERTIFICATE OF SURVEY

We Fred R. Chappell and Glen B. Hatch , HEREBY CERTIFY upon honor that,

in pursuance of special instructions bearing date of the 20thday of February , 19 67

We have dependently resurveyed the Second Standard Parallel North (South Boun
the Guide Meridian West (East Bdy.), the West Bdy., and the subdivisional l
of Township 9 North, Range 15 West

of the Salt Lake Meridian, in the State of Utah , which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

April 28, 1969
(Date)

Glen B. Hatch
(Cadastral Surveyor)
SUPERVISORY

May 1, 1968
(Date)

Fred R. Chappell
(Cadastral Surveyor)
SUPERVISORY

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT,
Washington, D. C.

The foregoing field notes of the dependent resurvey of the Second Standard Parallel North (South Boundary), the Guide Meridian West (East Bdy.), the West Bdy., and the subdivisional lines of Township 9 North, Range 15 West, Salt Lake Meridian, Utah

executed by Fred R. Chappell and Glen B. Hatch, Supervisory Cadastral Surveyo

having been critically examined and found correct, are hereby approved.

May 6 1969
(Date)

Clark F. Gumm
~~(Chief, Division of Engineering)~~
Chief, Division of Cadastral Survey

CERTIFICATE OF TRANSCRIPT

~~I CERTIFY That the foregoing transcript of the field notes of the above described surveys in~~

~~, is a true copy of the original field notes.~~

~~(Date)~~ ~~(Chief, Division of Engineering)~~

Blank

Page

Blank

Page

Form 9180-6
(April 1965)
(formerly 4-679)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

ORIGINAL

FIELD NOTES

OF THE

DEPENDENT RESURVEY

OF THE

GUIDE MERIDIAN WEST (EAST BOUNDARY)

THE SOUTH, NORTH AND WEST BOUNDARIES

AND

THE SUBDIVISIONAL LINES

OF

TOWNSHIP 10 NORTH, RANGE 15 WEST

RECEIVED
JUN 17 PM 12:
OFFICE OF LAND MGMT.

Of the SALT LAKE Meridian,

In the State of UTAH.

EXECUTED BY

FRED R. CHAPPELL SUPERVISORY CADASTRAL SURVEYOR

GLEN B. HATCH SUPERVISORY CADASTRAL SURVEYOR

Under special instructions dated FEBRUARY 20, 19 67, which provided for the surveys included under Group Number 491, approved FEBRUARY 24, 1967, and assignment instructions dated FEBRUARY 24, 19 67. and May 26, 1967.

Survey commenced FEBRUARY 27, 19 67

Survey completed AUGUST 24, 19 67

INDEX DIAGRAM

Township 10 NORTH, Range 15 WEST,

24 18 6 66	23 66 5 65	22 55 4 54	21 47 3 46	20 40 2 39	19 32 1 6 31
17 7 63	64 8 63	54 9 53	46 10 45	38 11 37	30 12 5 30
16 18 61	62 17 61	52 16 51	44 15 44	36 14 36	29 13 4 28
15 19 59	60 20 58	51 21 50	43 22 42	35 23 34	28 24 3 27
14 30 57	58 29 56	49 28 48	42 27 41	34 26 33	26 25 3 26
13 31 12	56 32 11	47 33 10	40 34 9	32 35 8	25 36 2 8

GPO 849-505

Dependent Resurvey of Township 10 North, Range 15 West

CHAINS

The Guide Meridian West (East Boundary), the South Boundary, the North Boundary, the West Boundary and the subdivisional lines were surveyed by G. V. M. Boutelle in 1872. The Guide Meridian West (East Boundary) was resurveyed by F. Dickert in 1882. The South Boundary, the North Boundary and the West Boundary were resurveyed by H. Fitzhugh in 1883. The following field notes are those of the dependent resurvey of the Guide Meridian West (East Boundary), the South Boundary, the North Boundary, the West Boundary and the subdivisional lines of Township 10 North, Range 15 West.

The survey was executed in accordance with the Manual of Surveying Instructions, 1947, and special instructions dated February 20, 1967.

Before restoring the corners, the lines of the original survey were retraced and diligent search made for any evidence of the original corners or other calls of the original field note record.

The rules of proportionate measurement were applied to ascertain the position of the lost corners, but not until exhausting every reasonable possibility of finding direct evidence for the control of each particular corner.

The direction of the lines of this survey were determined by the solar transit method.

The geographic position of the southeast corner of the township is at Latitude 41° 32' 22.4" N. and Longitude 113° 30' 02.0" W., as adjusted from section line ties to U.S.C. & G.S. triangulation station "Lemay", a standard bronze disk set in solid bedrock, at Latitude 41° 26' 06.1et" N. and Longitude 113° 32' 24.035" W., located S. 5° 52' 20" W., 94.63 chs. dist. from the standard cor. of sections 34 and 35, T. 9 N., R. 15 W.

The magnetic declination was read at several stations throughout the township and the average of these readings was found to be 17° 15' East.

Dependent Resurvey of the Guide Meridian West (East Bdy.), T. 10 N., R. 15 W.

Reestablishment of the Survey Executed by G. V. M. Boutelle in 1872 and the Resurvey Executed by F. Dickert in 1882.

Beginning at the cor. of Tps. 9 and 10 N., Rs. 14 and 15 W., monumented with a sandstone, 14x8x2 ins., firmly set and plainly mkd. 6 notches on N., S., E. and W. edges.

At the cor. point

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T10N
R15W R14W
S36 | S31
S1 | S6
T9N
1967

Bury original stone cor. alongside iron post.

Thence,

N. 0° 54' W., bet. secs. 31 and 36.

Over gently rolling land through shadscale and sagebrush undergrowth.

18.00 Wash, drains irregularly S. 50° W.

40.26 Point for the 1/4 sec. cor. of secs. 31 and 36 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T10N
R15W R14W
¼
S36 | S31
1967

Raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor.

47.00 Wash, drains S. 35° W. from N. 10° E.

80.52 The cor. of secs. 25, 30, 31 and 36, monumented with a pine post, 4x4x18 ins., mkd. 1 notch on S. and 5 on N. faces.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T10N
R15W R14W
S25 | S30
S36 | S31
1967

Bury original pine post cor. alongside iron post.

Land, gently rolling desert.
Soil, sandy clay.
No timber.
Undergrowth, shadscale and sagebrush.

Dependent Resurvey of the Guide Meridian West
(East Bdy.) Township 10 North, Range 15 West

CHAINS

N. 0° 47' W., bet. secs. 25 and 30.

Over gently rolling land through shadscale and sagebrush undergrowth.

40.15 The 1/4 sec. cor. of secs. 25 and 30, monumented with a limestone, 8x8x5 ins., firmly set and plainly mkd. 1/4 on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T10N
R15W R14W
¼
S25|S30

1967

Bury original stone cor. alongside iron post.

Raise a mound of stone, 3 ft. base, 1½ ft. high, W. of cor.

N. 0° 08' W., beginning new measurement.

28.75 Trail road, bears N. 60° W. and S. 60° E.

39.97 The cor. of secs. 19, 24, 25 and 30, monumented with the remains of cedar post, 3x3x12 ins., badly decayed.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T10N
R15W R14W

S24|S19
S25|S30

1967

Bury remains of original cedar post cor. alongside iron post.

Raise a mound of stone, 3 ft. base, 1½ ft. high, W. of cor.

Land, gently rolling desert.
Soil, sandy clay.
No timber.
Undergrowth, shadscale and sagebrush.

N. 1° 23' W., bet. secs. 19 and 24.

Dependent Resurvey of the Guide Meridian West
(East Bdy.), Townsh. 10 North, Range 15 West

CHAINS	
	Over gently rolling land through shadscale and sagebrush undergrowth.
4.05	Trail road, bears N. 50° W. and S. 50° E.
7.95	Trail road, bears nearly E. and W.
23.00	Wash, drains E.
27.70	Improved dirt road, bears E. and W.
40.23	The 1/4 sec. cor. of secs. 19 and 24, monumented with a conglomerate stone, 14x10x8 ins., firmly set and plainly mkd. 1/4 on W. face.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T10N R15W R14W ¼ S24|S19 1967
	Bury original stone cor. alongside iron post.
	Raise a mound of stone, 3 ft. base, 1½ ft. high, W. of cor.
	N. 0° 38' W., beginning new measurement.
7.00	Wash, 20 lks. wide, 2 ft. deep, drains S. 75° W.
40.15	Point for the cor. of secs. 13, 18, 19 and 24 at proportionate dist.; there is no remaining evidence of the original cor.
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T10N R15W R14W S13|S18 S24|S19 1967
	Raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor.
	Land, gently rolling desert. Soil, sandy. No timber. Undergrowth, shadscale and sagebrush.
	N. 0° 38' W., bet. secs. 13 and 18.

Dependent Resurvey of the Guide Meridian West
(East Bdy.), Township 10 North, Range 15 West

CHAINS

Asc. 115 ft. over gently rolling land through shadscale and sagebrush undergrowth.

17.45 Trail road, bears N. 85° E. and S. 85° W.

33.00 Wash, drains S. 60° W.

40.15 The 1/4 sec. cor. of secs. 13 and 18, monumented with a limestone, 10x5x4 ins., firmly set and plainly mkd. 1/4 on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T10N
R15W R14W
¼
S13|S18
1967

Bury original stone cor. alongside iron post.

N. 0° 38' W., beginning new measurement.

Asc. 20 ft. over SW. slope.

16.65 Trail road, bears N. 16° E. and S. 16° W.

25.55 Rocky point on spur, slopes S. 30° W.

40.15 The cor. of secs. 7, 12, 13 and 18, monumented with a conglomerate stone, 20x17x12 ins., firmly set and plainly mkd. 4 notches on S. and 2 on N. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T10N
R15W R14W
S12|S7
S13|S18
1967

Bury original stone cor. alongside iron post.

Land, gently rolling desert.
Soil, sandy clay.
No timber.
Undergrowth, shadscale and sagebrush.

N. 0° 48' W., bet. secs. 7 and 12.

244

Dependent Resurvey of the Guide Meridian West
(East Bdy.), Township 10 North, Range 15 West

CHAINS	
	Over gently rolling land through shadscale and sagebrush undergrowth.
1.65	Small draw, drains S. 56° W.
15.30	Small grove of scattered juniper timber, 4.00 chs. diam.
40.16	The 1/4 sec. cor. of secs. 7 and 12, monumented with a conglomerate stone, 20x12x4 ins., firmly set and plainly mkd. 1/4 on W. face. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T10N R15W R14W ¼ S12|S7 1967 Bury original stone cor. alongside iron post.
	N. 0° 45' W., beginning new measurement.
25.05	Wash, 30 lks. wide, 3 ft. deep, drains N. 40° W.
30.30	Small draw, drains S. 69° W.
40.11	Point for the cor. of secs. 1, 6, 7 and 12 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T10N R15W R14W S1|S6 S12|S7 1967 Land, gently rolling desert. Soil, sandy clay. Timber, widely scattered juniper grove in S. portion. Undergrowth, shadscale and sagebrush.
	N. 0° 45' W., bet. secs. 1 and 6. Over gently rolling land through shadscale and sagebrush undergrowth.
13.40	Wash, 10 lks. wide, 3 ft. deep, drains S. 32° W.

Dependent Resurvey of the Guide Meridian West
(East Bdy.), Township 10 North, Range 15 West

CHAINS	
23.65	Wash, 1.00 ch. wide, 5 ft. deep, drains S. 39° W.
27.95	Wash, 10 lks. wide, 2 ft. deep, drains S. 23° W.
40.11	Point for the 1/4 sec. cor. of secs. 1 and 6 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground, and in a collar of stone, with brass cap mkd. T10N R15W R14W ¼ S1 | S6 1967 Asc. 80 ft. over gently rolling land.
69.45	Gravel road, bears S. 68° 45' W. and N. 68° 45' E. to Kelton.
80.22	The cor. of Tps. 10 and 11 N., Rs. 14 and 15 W., monumented with a conglomerate rock, 24x20x20 ins., firmly set in the ground with 6 notches on all four edges. A cedar post 7 feet long is set alongside cor. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T11N R15W R14W S36 | S31 S1 | S6 T10N 1967 Bury the original cor. alongside iron post. Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, shadscale and sagebrush.

Dependent Resurvey of the S. Bdy. T. 10 N., R. 15 W.

Reestablishment of the Survey Executed by G. V. M. Boutelle in 1872 and the Resurvey Executed by H. Fitzhugh in 1883.

From the cor. of Tps. 9 and 10 N., Rs. 14 and 15 W., hereinbefore described.

246

Dependent Resurvey of the S. Bdy., T. 10 N., R. 15 W.

CHAINS	
	N. 89° 55' W., bet. secs. 1 and 36.
	Over gently rolling land through shadscale and sagebrush undergrowth.
20.25	Wash, 10 lks. wide, 4 ft. deep, drains S.
29.45	Wash, drains S.
40.13	The 1/4 sec. cor. of secs. 1 and 36, monumented with a sandstone, 6x4x4 ins., plainly mkd. 1/4 on N. face.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.
	T10N R15W ¼ S36 / S1 T9N 1967
	Bury original stone cor. alongside iron post.
	S. 88° 37' W., beginning new measurement.
27.70	Old pipeline and trail road, bears S. and curves N. 25° W.
40.29	The cor. of secs. 1, 2, 35 and 36, monumented with a redwood post, 3x4x24 ins., plainly mkd. 1 notch on E. and 5 on W. faces.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.
	T10N R15W S35 | S36 S2 | S1 T9N R15W 1967
	Bury original redwood post cor. alongside iron post.
	Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, shadscale and sagebrush.
	S. 89° 22' W., bet. secs. 2 and 35.
	Over gently rolling land through shadscale and sagebrush undergrowth.

247

Dependent Resurvey of the S. Bdy., T. 10 N., R. 15 W.

CHAINS	
6.85	Wash, 20 lks. wide, 10 ft. deep, drains irregularly S. 50° E.
27.30	Old pipeline, bears N. 45° W. and S. 45° E.
40.19	The 1/4 sec. cor. of secs. 2 and 35, monumented with a sandstone, 10x8x4 ins., firmly set and plainly mkd. 1/4 on N. face.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T10N R15W ¼ S35/S2 T9N R15W 1967
	Bury original stone cor. alongside iron post.
	Raise a mound of stone, 2½ ft. base, 1½ ft. high, N. of cor.
	S. 89° 10' W., beginning new measurement.
6.50	Old pipeline, bears N. 17° W. and S. 17° E.
8.65	Wash, 15 lks. wide, 2 ft. deep, drains S. 30° E.
23.00	Wash, drains S. 10° E.
31.00	Wash, drains S. 25° E.
40.00	Point for the cor. of secs. 2, 3, 34 and 35 at proportionate dist.; there is no remaining evidence of the original cor.
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T10N R15W S34 | S35 S3 | S2 T9N R15W 1967
	Raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor.
	Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, shadscale and sagebrush.
	S. 89° 10' W., bet. secs. 3 and 34.

Dependent Resurvey of the S. Bdy., T. 10 N., R. 15 W.

CHAINS	
	Over gently rolling land through shadscale and sagebrush undergrowth.
15.20	Wash, drains S. 20° E.
25.20	Wash, drains S. 20° E.
39.95	Wash, 10 lks. wide, 2 ft. deep, drains irregularly S.
40.11	Point for the 1/4 sec. cor. of secs. 3 and 34 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T10N R15W ¼ S34 / S3 T9N R15W 1967
67.20	Wash, drains S. 5° E.
80.22	Point for the cor. of secs. 3, 4, 33 and 34 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T10N R15W S33 | S34 S4 | S3 T9N R15W 1967 Raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor. Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, shadscale and sagebrush.
	S. 89° 10' W., bet. secs. 4 and 33. Over gently rolling land through shadscale and sagebrush undergrowth.
40.11	Point for the 1/4 sec. cor. of secs. 4 and 33 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T10N R15W ¼ S33 / S4 T9N R15W 1967

Dependent Resurvey of the S. Bdy., T. 10 N., R. 15 W.

CHAINS	
	Raise a mound of stone, 2½ ft. base, 1½ ft. high, N. of cor.
61.90	Trail road, bears N. and S.
71.17	Old pipeline, bears N. 15° W. and S. 15° E.
80.30	Point for the cor. of secs. 4, 5, 32 and 33 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T10N R15W S32 | S33 S5 | S4 T9N R15W 1967 Raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor. Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, shadscale and sagebrush.
	S. 89° 10' W., bet. secs. 5 and 32. Over gently rolling land through shadscale and sagebrush undergrowth.
14.20	Small gully, drains S. 45° E.
23.60	Small gully, drains S. 45° E.
40.19	Point for the 1/4 sec. cor. of secs. 5 and 32 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T10N R15W ¼ S32 / S5 T9N R15W 1967
41.40	Wash, 40 lks. wide, 4 ft. deep, drains S. 40° E.
42.35	Wash, 30 lks. wide, 3 ft. deep, drains S. 40° E.
51.80	Utah State Highway No. 70, bears N. 15° E. and S. 15° W.
53.78	Transmission line, parallel to highway.

250

Dependent Resurvey of the S. Bdy., T. 10 N., R. 15 W.

CHAINS	
64.55	Wash, drains S. 50° E.
80.38	The cor. of secs. 5, 6, 31 and 32, monumented with a redwood post, 3x3x12 ins. in small mound of stone. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T10N R15W S31 | S32 S6 | S5 T9N R15W 1967 Bury original redwood post cor. alongside iron post. Raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor. Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, shadscale and sagebrush.
	S. 89° 11' W., bet. secs. 6 and 31. Over gently rolling land through shadscale and sagebrush undergrowth.
28.50	Trail road, bears N. and S.
30.00	Wash, 15 lks. wide, 2 ft. deep, drains S. 65° E.
40.00	Point for the 1/4 sec. cor. of secs. 6 and 31 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T10N R15W ¼ S31 / S6 T9N R15W 1967 Raise a mound of stone, 2½ ft. base, 1½ ft. high, N. of cor. Asc. 50 ft. over gently rolling land.
80.83	The cor. of Tps. 9 and 10 N., Rs. 15 and 16 W., monumented with a pine post, 4x4x12 ins., firmly set in small mound of stone and plainly mkd. 6 notches on N., S., E. and W. edges.

Dependent Resurvey of the S. Bdy., T. 10 N., R. 15 W.

CHAINS

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T10N
R16W R15W
S36 | S31
S1 | S6
T9N
1967

Bury original pine post cor. alongside iron post.

Raise a mound of stone, 2½ ft. base, 1½ ft. high, N. of cor.

Land, gently rolling desert.
Soil, sandy clay.
No timber.
Undergrowth, shadscale and sagebrush.

Dependent Resurvey of the W. Bdy., T. 10 N., R. 15 W.

Reestablishment of the Survey Executed by G. V. M. Boutelle in 1872 and the Resurvey Executed by H. Fitzhugh in 1883.

From the cor. of Tps. 9 and 10 N., Rs. 15 and 16 W., hereinbefore described.

N. 0° 59' W., bet. secs. 31 and 36.

Over gently rolling land through shadscale and sagebrush undergrowth.

10.00 Wash, drains E.

26.40 Wash, 5 lks. wide, 1 ft. deep, drains S. 46° E.

40.16 The 1/4 sec. cor. of secs. 31 and 36, monumented with a pine post, 4x4x12 ins., set in mound of stone, with dim scribe marks on one side.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T10N
R16W R15W
¼
S36 | S31
1967

Bury original pine post cor. alongside iron post.

Dependent Resurvey of the W. Bdy., T. 10 N., R. 15 W.

CHAINS	
	N. 1° 15' W., beginning new measurement.
25.45	Wash, 15 lks. wide, 3 ft. deep, drains S. 74° E.
40.12	The cor. of secs. 25, 30, 31 and 36, monumented with a pine post, 3x4x18 ins., firmly set in small mound of stone and plainly scribed 1 notch on S. and 5 on N. faces. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T10N R16W R15W S25 | S30 S36 | S31 1967 Bury original pine post cor. alongside iron post. Raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor. Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, shadscale and sagebrush.
	N. 0° 44' W., bet. secs. 25 and 30. Over gently rolling land through shadscale and sagebrush undergrowth.
9.60	Trail road, bears N. 79° E. and S. 79° W.
11.25	Draw, 15 ft. deep, drains S. 54° E.
13.25	Trail road, bears N. 50° W. and S. 50° E.
40.02	The 1/4 sec. cor. of secs. 25 and 30, monumented with a limestone, 10x8x3 ins., firmly set and plainly mkd. 1/4 on W. face. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground, and in a collar of stone, with brass cap mkd. T10N R16W R15W ¼ S25 | S30 1967 Bury original stone cor. alongside iron post.

CHAINS	
	Raise a mound of stone, 3 ft. base, 1½ ft. high, W. of cor.
	N. 0° 49' W., beginning new measurement.
18.32	Trail road, bears N. 50° E. and S. 50° W.
28.55	Wash, drains E.
40.17	The cor. of secs. 19, 24 and 25, and 30, monumented with a pine stake, 3x3x14 ins., in mound of stone. No visible marks, but recognized as the cor. by local ranchers.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T10N R16W R15W S24 | S19 S25 | S30 1967
	Bury original pine stake alongside iron post.
	Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.
	Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, shadscale and sagebrush.
	N. 1° 13' W., bet. secs. 19 and 24.
	Over gently rolling land through shadscale and sagebrush undergrowth.
15.00	Wash, drains S. 75° E.
38.00	Wash, drains E.; enter greasewood.
40.51	Point for the 1/4 sec. cor. of secs. 19 and 24 at proportionate dist.; there is no remaining evidence of the original cor.
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T10N R16W R15W ¼ S24 | S19 1967
	Raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor.

254

Dependent Resurvey of the W. Bdy., T. 10 N., R. 15 W.

CHAINS	
50.00	Leave greasewood.
81.02	The cor. of secs. 13, 18, 19 and 24, monumented with a pine post, 3x3x12 ins., set in small mound of stone. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T10N R16W R15W S13 | S18 S24 | S19 1967 Bury original pine post cor. alongside iron post. Raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor. Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, shadscale, sagebrush and greasewood.
	N. 0° 35' W., bet. secs. 13 and 18. Over gently rolling land through shadscale and sagebrush undergrowth.
16.55	Wash, 20 lks. wide, 3 ft. deep, drains S. 45° E.
39.77	Point for the 1/4 sec. cor. of secs. 13 and 18 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T10N R16W R15W ¼ S13 | S18 1967 Set a granite stone, 30x12x4 ins., W. of cor.
45.25	Trail road, bears N. 85° E. and S. 85° W.
58.50	Trail road, bears N. 30° E. and S. 30° W.
66.55	Wash, 15 lks. wide, 2 ft. deep, drains E.
73.35	Wash, 20 lks. wide, 3 ft. deep, drains E.; enter timber.
79.54	The cor. of secs. 7, 12, 13 and 18, monumented with a limestone, 12x10x6 ins., plainly mkd. 4 notches on S. and 2 on N. edges. At the cor. point

Dependent Resurvey of the W. Bdy., T. 10 N., R. 15 W.

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T10N
R16W R15W
S12 | S7
S13 | S18
1967

Bury original stone cor. alongside iron post.

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Land, gently rolling desert.
Soil, sandy clay.
Timber, dense juniper N. portion.
Undergrowth, shadscale and sagebrush.

N. 0° 31' W., bet. secs. 7 and 12.

Over gently rolling land along W. side of dense juniper.

15.05 Trail road, bears N. 31° E. and S. 31° W.; leave timber.

22.55 Improved dirt road, bears S. 28° W. and N. 28° E. to Rosebud Ranch.

31.75 Draw, 15 ft. deep, drains S. 82° E.

40.13 The 1/4 sec. cor. of secs. 7 and 12, monumented with a limestone, 14x8x5 ins., firmly set and plainly mkd. 1/4 on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T10N
R16W R15W
¼
S12 | S7
1967

Bury original stone cor. alongside iron post.

N. 0° 41' W., beginning new measurement.

0.15 Trail road, bears N. 87° E. and S. 72° W.

2.95 Wash, 15 lks. wide, 4 ft. deep, drains S. 61° E.

14.45 Trail road, bears N. 70° W. and S. 62° E.

21.95 Trail road, bears N. 47° W. and S. 47° E.

256

Dependent Resurvey of the W. Bdy., T. 10 N., R. 15 W.

CHAINS	
40.15	The cor. of secs. 1, 6, 7 and 12, monumented with a limestone, 12x9x7 ins., firmly set and plainly mkd. 5 notches on S. and 1 on N. edges. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T10N R16W R15W S1 | S6 S12 | S7 1967 Bury original stone cor. alongside iron post. Land, gently rolling. Soil, sandy clay. Timber, dense juniper S. portion. Undergrowth, shadscale and sagebrush.
	N. 0° 41' W., bet. secs. 1 and 6. Over gently rolling land through shadscale and sagebrush undergrowth.
5.00	Wash, drains S. 45° E.
14.10	Trail road, bears N. 62° E. and S. 62° W.
25.00	Wash, drains S. 45° E.
40.00	The 1/4 sec. cor. of secs. 1 and 6, monumented with a pine post, 3x3x15 ins., dimly scribed 1/4 on one face. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd. T10N R16W R15W ¼ S1 | S6 1967 Bury original pine post cor. alongside iron post.
	N. 0° 41' W., beginning new measurement.
3.15	Trail road, bears N. 15° W. and S. 5° E.
16.15	Enter scattered timber; asc. 150 ft. over rolling SE. slope.

Dependent Resurvey of the N. Bdy., T. 10 N., R. 15 W.

CHAINS	
24.15	Draw, drains S. 60° E.
40.16	The cor. of Tps. 10 and 11 N., Rs. 15 and 16 W., monumented with a pine post, 4x4x18 ins., set in mound of stone and dimly scribed 6 notches on S. and E. faces.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T11N T11N
R16W R15W

S36	S31
S1	S6

T10N T10N
R16W R15W

1967

Bury original pine post cor. alongside iron post.

Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.

Land, gently rolling S. portion; rolling N. portion.
Soil, sandy clay.
Timber, scattered juniper N. portion.
Undergrowth, shadscale and sagebrush.

Dependent Resurvey of the N. Bdy., T. 10 N., R. 15 W.

Reestablishment of the Survey Executed by G. V. M. Boutelle in 1872 and the Resurvey Executed by H. Fitzhugh in 1883.

From the cor. of Tps. 10 and 11 N., Rs. 14 and 15 W., hereinbefore described.

S. 87° 43' W., bet. secs. 1 and 36.

Over gently rolling land through shadscale and sagebrush undergrowth.

4.55	Small draw, drains S. 16° E.
10.45	Small draw, drains S. 11° E.
14.10	Draw, 3.00 chs. wide, 8 ft. deep, drains S. 22° E.
19.90	Draw, 12 ft. deep, drains S. 6° W.
26.05	Draw, 10 ft. deep, drains S. 8° W.
30.35	Trail road, bears N. 11° E. and S. 11° W.

Dependent Resurvey of the N. Bdy., T. 10 N., R. 15 W.

CHAINS	
32.25	Wash, drains S. 17° E.
40.12	Point for the 1/4 sec. cor. of secs. 1 and 36 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T11N R15W ¼ S36 / S1 T10N R15W 1967
43.35	Trail road, bears N. 46° E. and S. 34° W.
52.65	Rocky ridge, bears N. 25° W. and S. 25° E.; desc. 135 ft. over gently rolling land.
68.70	Trail road, bears N. 11° W. and S. 11° E.
75.10	Trail road, bears N. 67° W. and S. 67° E.
76.00	Wash, drains S. 40° W.
80.24	The cor. of secs. 1, 2, 35 and 36, monumented with a 4x4x12 ins. pine post, dimly mkd. 1 notch on E. and 5 on W. edges. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd. T11N R15W S35 | S36 / S2 | S1 T10N 1967 Bury original pine post cor. alongside iron post. Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, shadscale and sagebrush.
	S. 89° 42' W., bet. secs. 2 and 35. Desc. 60 ft. over gently rolling land through shadscale and sagebrush undergrowth.
5.05	Wash, 80 lks. wide, 3 ft. deep, drains S. 3° E.
18.00	Enter scattered timber.

Dependent Resurvey of the N. Bdy., T. 10 N., R. 15 W.

CHAINS	
32.00	Leave scattered timber.
40.18	Point for the 1/4 sec. cor. of secs. 2 and 35, at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd. T11N R15W ¼ S35 / S2 T10N R15W 1967
49.75	Trail road, bears N. 5° W. and S. 5° E.
80.36	Point for the cor. of secs. 2, 3, 34 and 35 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground, and in a collar of stone, with brass cap mkd. T11N R15W S34 | S35 S3 | S2 T10N R15W 1967 Land, gently rolling desert. Soil, sandy clay. Timber, scattered juniper. Undergrowth, shadscale and sagebrush.
	S. 89° 42' W., bet. secs. 3 and 34. Over gently rolling land through shadscale and sagebrush undergrowth.
13.40	Trail road, bears N. 20° W. and S. 20° E.
17.60	Trail road, bears N. 70° E. and S. 53° W.
33.60	Wash, 10 lks. wide, 4 ft. deep, drains S. 8° E.
40.18	Point for the 1/4 sec. cor. of secs. 3 and 34 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground, and in a collar of stone, with brass cap mkd.

Dependent Resurvey of the N. Bdy., T. 10 N., R. 15 W.

CHAINS	
	T11N R15W ¼ S34 / S3 T10N R15W 1967
41.05	Trail road, bears N. 35° W. and S. 35° E.
77.55	Utah State Highway No. 70, bears N. 15° 02' E. and S. 15° 02' W.
80.36	The cor. of secs. 3, 4, 33 and 34, monumented with a pine post, 3x3x36 ins., firmly set and plainly mkd. 3 notches on E. and W. edges. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T11N R15W S33 | S34 S4 | S3 T10N R15W 1967 Bury original pine post cor. alongside iron post. Set a steel fence post, 6 ft. long, alongside iron post. Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, shadscale and sagebrush.
	S. 89° 39' W., bet. secs. 4 and 33. Over gently rolling land through shadscale and sagebrush undergrowth.
20.70	Trail road, bears N. 79° W. and S. 79° E.
40.08	The 1/4 sec. cor. of secs. 4 and 33, monumented with a pine post, 3x3x30 ins., dimly mkd. 1/4. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, with brass cap mkd. T11N R15W ¼ S33 / S4 T10N R15W 1967 Bury original pine post cor. alongside iron post.

CHAINS

Set a steel fence post, 6 ft. long, alongside iron post.

S. 89° 33' W., beginning new measurement.

9.00 Wash, drains S. 20° E.

40.18 The cor. of secs. 4, 5, 32 and 33, monumented with a pine post, 3x3x18 ins., set in a small mound of stone.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T11N R15W

S32	S33
S5	S4

T10N R15W

1967

from which

A spike in transmission pole, bears S. 82° W., 90½ lks. dist.

Bury original pine post cor. alongside iron post.

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Land, gently rolling desert.
Soil, sandy clay.
No timber.
Undergrowth, shadscale and sagebrush.

S. 89° 28' W., bet. secs. 5 and 32.

Asc. 40 ft. over gently rolling land through shadscale and sagebrush undergrowth.

0.90 Transmission line, bears N. 0° 09' W. and S. 0° 09' E.

2.50 Enter widely scattered juniper timber.

25.00 Trail road, bears N. 19° W. and S. 19° E.

32.95 Wash, 10 lks. wide, 4 ft. deep, drains S. 37° E.

37.60 Trail road, bears N. 25° E. and S. 25° W.

40.15 Point for the 1/4 sec. cor. of secs. 5 and 32 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.

Dependent Resurvey of the N. Bdy., T. 10 N., R. 15 W.

CHAINS	
	T11N R15W ¼ S32 / S5 T10N R15W 1967
54.00	Small draw, drains S. 21° E.
68.15	Small draw, drains S. 25° W.
78.50	Draw, drains S. 40° E.
80.30	The cor. of secs. 5, 6, 31 and 32, monumented with a pine post, 3x3x12 ins., set in small mound of stone. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T11N R15W S31 | S32 S6 | S5 T10N R15W 1967 Bury original pine post cor. alongside iron post. Land, gently rolling desert. Soil, sandy clay. Timber, widely scattered juniper. Undergrowth, shadscale and sagebrush.
	S. 89° 26' W., bet. secs. 6 and 31. Over rolling land through widely scattered juniper timber.
11.05	Trail road, bears N. 26° E. and S. 26° W.
23.00	Wash, 50 lks. wide, 8 ft. deep, drains S. 55° E.; asc. 50 ft. over NE. slope.
40.10	The 1/4 sec. cor. of secs. 6 and 31, monumented with a sandstone, 20x8x7 ins., firmly set and plainly mkd. 1/4 on N. face. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T11N R15W ¼ S31 / S6 T10N R15W 1967 Bury original stone cor. alongside iron post. Raise a mound of stone, 2½ ft. base, 1½ ft. high, N. of cor.

Dependent Resurvey of the N. Bdy., T. 10 N., R. 15 W.

CHAINS	
	S. 89° 23' W., beginning new measurement.
	Asc. 50 ft. over NE. slope.
6.00	Spur, slopes S. 30° E.; thence by triangulation; desc. about 40 ft. over SW. slope.
10.00	Draw, drains S. 30° E.; asc. about 40 ft. over NE. slope.
24.00	Ridge, bears N. 24° W. and S. 24° E.; desc. about 40 ft. over SW. slope.
32.00	Draw, drains S.; asc. about 30 ft. over SE. slope.
40.62	The cor. of Tps. 10 and 11 N., Rs. 15 and 16 W., hereinbefore described. End triangulation.
	Land, rolling E. portion; mountainous W. portion. Soil, rocky loam. Timber widely scattered juniper. Undergrowth, shadscale and sagebrush.

Dependent Resurvey of the Subdivision, T. 10 N., R. 15 W.

Reestablishment of the Survey Executed by G. V. M. Boutelle in 1872.

	From the cor. of secs. 1, 2, 35 and 36, on the S. bdy. of the Tp., hereinbefore described.
	N. 0° 47' W., bet. secs. 35 and 36.
	Over gently rolling land through shadscale and sagebrush undergrowth.
23.50	Wash, 10 lks. wide, 3 ft. deep, drains S. 37° W.
40.00	Point for the 1/4 sec. cor. of secs. 35 and 36 at proportionate dist.; there is no remaining evidence of the original cor.
	Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground, and in a collar of stone, with brass cap mkd. T10N R15W ¼ S35|S36 1967
45.80	Wash, 10 lks. wide, 3 ft. deep, drains S. 40° E.
46.50	Trail road, bears N. 25° W. and S. 25° E.
80.00	Point for the cor. of secs. 25, 26, 35 and 36 at proportionate dist.; there is no remaining evidence of the original cor.

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.

T10N R15W

S26 | S25
S35 | S36

1967

Land, gently rolling desert.
Soil, sandy clay.
No timber.
Undergrowth, shadscale and sagebrush.

From the cor. of secs. 25, 30, 31 and 36, on the E. bdy. of the Tp., hereinbefore described.

S. 89° 00' W., bet. secs. 25 and 36.

Over gently rolling land through shadscale and sagebrush undergrowth.

31.20 Wash, drains irregularly S.

40.11 Point for the 1/4 sec. cor. of secs. 25 and 36 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd.

T10N R15W

¼ S25
S36

1967

Raise a mound of stone, 2½ ft. base, 1½ ft. high, N. of cor.

43.20 Wash, drains S. 15° W.

80.22 The cor. of secs. 25, 26, 35 and 36.

Land, gently rolling desert.
Soil, sandy clay.
No timber.
Undergrowth, shadscale and sagebrush.

N. 1° 02' W., bet. secs. 25 and 26.

Over gently rolling land through shadscale and sagebrush undergrowth.

40.00 Point for the 1/4 sec. cor. of secs. 25 and 26 at proportionate dist.; there is no remaining evidence of the original cor.

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

T10N R15W
¼
S26 | S25
1967

80.00 Point for the cor. of secs. 23, 24, 25 and 26 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.

T10N R15W
S23 | S24
S26 | S25
1967

Land, gently rolling desert.
Soil, sandy clay.
No timber.
Undergrowth, shadscale and sagebrush.

From the cor. of secs. 19, 24, 25 and 30, on the E. bdy. of the Tp., hereinbefore described.

S. 88° 55' W., bet. secs. 24 and 25.

Over gently rolling land through shadscale and sagebrush undergrowth.

16.85 Trail road, bears N. 60° W. and S. 60° E.

40.42 Point for the 1/4 sec. cor. of secs. 24 and 25 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T10N R15W
¼ S24
S25
1967

Raise a mound of stone, 2½ ft. base, 1½ ft. high, N. of cor.

55.05 Wash, drains irregularly S.

80.84 The cor. of secs. 23, 24, 25 and 26.

CHAINS	
	Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, shadscale and sagebrush.
	N. 1° 05' W., bet. secs. 23 and 24. Over gently rolling land through shadscale and sagebrush undergrowth.
20.25	Trail road, bears N. 71° E. and S. 71° W.
37.95	Trail road, bears N. 64° W. and S. 64° E.
40.00	Point for the 1/4 sec. cor. of secs. 23 and 24 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd. T10N R15W ¼ S23 | S24 1967
80.00	Point for the cor. of secs. 13, 14, 23 and 24 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T10N R15W S14 | S13 S23 | S24 1967 Raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor. Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, shadscale and sagebrush.
	From the cor. of secs. 13, 18, 19 and 24, on the E. bdy. of the Tp., hereinbefore described. S. 88° 45' W., bet. secs. 13 and 24. Over gently rolling desert land through shadscale and sagebrush undergrowth.

CHAINS

29.00 Wash, drains S. 65° W.

40.48 Point for the 1/4 sec. cor. of secs. 13 and 24 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T10N R15W

¼ S13/S24

1967

Raise a mound of stone, 2½ ft. base, 1½ ft. high, N. of cor.

53.00 Wash, drains S. 60° W.

80.96 The cor. of secs. 13, 14, 23 and 24.

Land, gently rolling desert.
Soil, sandy clay.
No timber.
Undergrowth, shadscale and sagebrush.

N. 0° 15' W., bet. secs. 13 and 14.

Over gently rolling land through shadscale and sagebrush undergrowth.

39.70 Trail road, bears N. 24° W. and S. 24° E.

39.99 Point for the 1/4 sec. cor. of secs. 13 and 14 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

T10N R15W

¼

S14|S13

1967

49.00 Trail road, bears N. 72° W. and S. 72° E.

53.00 Rocky point, 15 ft. high.

79.98 Point for the cor. of secs. 11, 12, 13 and 14 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground, and in a collar of stone, with brass cap mkd.

CHAINS	
	T10N R15W S11 | S12 S14 | S13 1967 Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, shadscale and sagebrush.
	From the cor. of secs. 7, 12, 13 and 18, on the E. bdy. of the Tp., hereinbefore described. S. 88° 30' W., bet. secs. 12 and 13. Desc. 50 ft. over gently rolling land through shadscale and sagebrush undergrowth.
17.00	Wash, drains S. 25° W.
39.15	Wash, 10 lks. wide, 2 ft. deep, drains S. 27° E.
40.18	Point for the 1/4 sec. cor. of secs. 12 and 13 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd. T10N R15W ¼ S12 / S13 1967
57.20	Wash, 15 lks. wide, 3 ft. deep, drains S. 31° E.
80.36	The cor. of secs. 11, 12, 13 and 14. Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, shadscale and sagebrush.
	N. 0° 57' W., bet. secs. 11 and 12. Over gently rolling land through shadscale and sagebrush undergrowth.
40.00	Point for the 1/4 sec. cor. of secs. 11 and 12 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T10N R15W ¼ S11 | S12 1967

Dependent Resurvey of the Subdivision, T. 10 N., R. 15 W.

CHAINS	
	Raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor.
58.90	Trail road, bears N. 74° E. and S. 74° W.
69.60	Wash, 10 lks. wide, 2 ft. deep, drains S. 42° W.
72.90	Wash, 10 lks. wide, 1 ft. deep, drains S. 73° W.
80.00	Point for the cor. of secs. 1, 2, 11 and 12 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T10N R15W S 2 | S1 S11 | S12 1967 Raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor. Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, shadscale and sagebrush.
	From the cor. of secs. 1, 6, 7 and 12, on the E. bdy. of the Tp., hereinbefore described. S. 88° 17' W., bet. secs. 1 and 12. Over gently rolling land through shadscale and sagebrush undergrowth.
38.80	Trail road, bears N. 46° E. and S. 46° W.
40.33	Point for the 1/4 sec. cor. of secs. 1 and 12 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T10N R15W ¼ S1 S12 1967 Raise a mound of stone, 2½ ft. base, 1½ ft. high, N. of cor.
66.20	Wash, 5 lks. wide, 2 ft. deep, drains S. 28° W.

Dependent Resurvey of the Subdivision, T. 10 N., R. 15 W.

CHAINS	
80.66	The cor. of secs. 1, 2, 11 and 12. Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, shadscale and sagebrush.
	N. 0° 26' W., bet. secs. 1 and 2. Over gently rolling land through shadscale and sagebrush undergrowth.
4.55	Wash, 5 lks. wide, 1 ft. deep, drains S. 53° W.
24.15	Wash, 10 lks. wide, 1 ft. deep, drains S. 47° W.
30.65	Trail road, bears N. 52° W. and S. 52° E.
39.99	Point for the 1/4 sec. cor. of secs. 1 and 2 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd. T10N R15W ¼ S2|S1 1967 Raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor.
40.55	Gravel road, bears S. 68° 20' W. and N. 68° 20' E. to Kelton.
74.70	Wash, 10 lks. wide, 3 ft. deep, drains S. 54° W.
79.40	The cor. of secs. 1, 2, 35 and 36, on the N. bdy. of the Tp., hereinbefore described. Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, shadscale and sagebrush.
	From the cor. of secs. 2, 3, 34 and 35, on the S. bdy. of the Tp., hereinbefore described. N. 1° 16' W., bet. secs. 34 and 35. Over gently rolling land through shadscale and sagebrush undergrowth.
36.10	Wash, 5 lks. wide, 1 ft. deep, drains S. 48° E.

Dependent Resurvey of the Subdivision, T. 10 N., R. 15 W.

CHAINS	
40.02	Point for the 1/4 sec. cor. of secs. 34 and 35 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground, and in a collar of stone, with brass cap mkd. T10N R15W ¼ S34 | S35 1967
52.50	Old pipeline, bears N. 45° W. and S. 45° E.
59.00	Wash, drains S. 25° E.
80.04	Point for the cor. of secs. 26, 37, 34 and 35 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd. T10N R15W S27 | S26 S34 | S35 1967 Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, shadscale and sagebrush.
	From the cor. of secs. 25, 26, 35 and 36. S. 89° 21' W., bet. secs. 26 and 35. Over gently rolling land through shadscale and sagebrush undergrowth.
10.60	Trail road, bears N. 15° W. and S. 15° E.
40.41	Point for the 1/4 sec. cor. of secs. 26 and 35 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd. T10N R15W ¼ S26 S35 1967

Dependent Resurvey of the Subdivision, T. 10 N., R. 15 W.

CHAINS	
55.80	Wash, drains S. 50° E.
78.80	Wash, drains S.
80.82	The cor. of secs. 26, 27, 34 and 35. Land, gently rolling. Soil, sandy clay. No timber. Undergrowth, shadscale and sagebrush.
	N. 0° 37' W., bet. secs. 26 and 27. Over gently rolling land through shadscale and sagebrush undergrowth.
4.45	Wash, 20 lks. wide, 5 ft. deep, drains S. 65° E.
4.95	Wash, 25 lks. wide, 5 ft. deep, drains S. 67° E.
40.01	Point for the 1/4 sec. cor. of secs. 26 and 27 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd. T10N R15W ¼ S27 | S26 1967
80.02	Point for the cor. of secs. 22, 23, 26 and 27 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground, and in a collar of stone, with brass cap mkd. T10N R15W S22 | S23 S27 | S26 1967 Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, shadscale and sagebrush.
	From the cor. of secs. 23, 24, 25 and 26. S. 89° 21' W., bet. secs. 23 and 26.

Dependent Resurvey of the Subdivision, T. 10 N., R. 15 W.

CHAINS

Over gently rolling land through shadscale and sagebrush undergrowth.

34.25 Trail road, bears N. 15° W. and S. 15° E.

40.09 Point for the 1/4 sec. cor. of secs. 23 and 26 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T10N R15W

¼ S23/S26

1967

Raise a mound of stone, 2½ ft. base, 1½ ft. high, N. of cor.

From this cor. a water well, bears N. 60° 21' E., 4.83 chs. dist.

80.18 The cor. of secs. 22, 23, 26 and 27.

Land, gently rolling desert.
Soil, sandy clay.
No timber.
Undergrowth, shadscale and sagebrush.

N. 1° 30' W., bet. secs. 22 and 23.

Over gently rolling land through shadscale and sagebrush undergrowth.

19.75 Trail road, bears N. 73° E. and S. 73° W.

37.00 Wash, drains W.

40.02 Point for the 1/4 sec. cor. of secs. 22 and 23 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground, and in a collar of stone, with brass cap mkd.

T10N R15W

¼

S22|S23

1967

41.15 Trail road, bears N. 81° E. and S. 81° W.

47.95 Wash, 40 lks. wide, 8 ft. deep, drains S. 17° W.

80.04 Point for the cor. of secs. 14, 15, 22 and 23 at proportionate dist.; there is no remaining evidence of the original cor.

CHAINS	
	Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground, and in a collar of stone, with brass cap mkd. T10N R15W S15 | S14 S22 | S23 1967 Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, shadscale and sagebrush.
	From the cor. of secs. 13, 14, 23 and 24. S. 89° 23' W., bet. secs. 14 and 23. Over gently rolling land through shadscale and sagebrush undergrowth.
40.41	Point for the 1/4 sec. cor. of secs. 14 and 23 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd. T10N R15W ¼ S14 S23 1967
50.50	Trail road, bears N. 22° W. and S. 22° E.
56.55	Trail road, bears N. 12° W. and S. 12° E.
63.00	Wash, drains S.
80.82	The cor. of secs. 14, 15, 22 and 23. Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, shadscale and sagebrush.
	N. 0° 07' W., bet. secs. 14 and 15. Over gently rolling land through shadscale and sagebrush undergrowth.
40.01	Point for the 1/4 sec. cor. of secs. 14 and 15 at proportionate dist.; there is no remaining evidence of the original cor.

Dependent Resurvey of the Subdivision, T. 10 N., R. 15 W.

CHAINS	
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T10N R15W ¼ S15|S14 1967
79.05	Trail road, bears N. 65° E. and S. 65° W.
80.02	Point for the cor. of secs. 10, 11, 14 and 15 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground, and in a collar of stone, with brass cap mkd. T10N R15W S10|S11 S15|S14 1967 Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, shadscale and sagebrush.
	From the cor. of secs. 11, 12, 13 and 14. S. 89° 27' W., bet. secs. 11 and 14. Desc. 115 ft. over gently rolling land through shadscale and sagebrush undergrowth.
28.60	Wash, 10 lks. wide, 1 ft. deep, drains S. 65° W.
33.35	Trail road, bears N. 30° W. and S. 30° E.
40.35	Point for the 1/4 sec. cor. of secs. 11 and 14 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.

Dependent Resurvey of the Subdivision, T. 10 N., R. 15 W.

CHAINS	
	T10N R15W ¼ S11/S14 1967
51.75	Wash, 15 lks. wide, 4 ft. deep, drains S. 6° E.
69.45	Trail road, bears N. 17° W. and S. 17° E.
70.30	Wash, 5 lks. wide, 2 ft. deep, drains S. 7° E.
78.40	Trail road, bears N. 65° E. and S. 65° W.
80.70	The cor. of secs. 10, 11, 14 and 15.
	Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, shadscale and sagebrush.
	N. 0° 46' W., bet. secs. 10 and 11.
	Over gently rolling land through shadscale and sagebrush undergrowth.
12.70	Trail road, bears N. 19° E. and S. 19° W.
40.01	Point for the 1/4 sec. cor. of secs. 10 and 11 at proportionate dist.; there is no remaining evidence of the original cor.
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T10N R15W ¼ S10|S11 1967
	Raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor.
69.25	Trail road, bears S. 11° W. and nearly W.
80.02	Point for the cor. of secs. 2, 3, 10 and 11 at proportionate dist.; there is no remaining evidence of the original cor.

CHAINS	
	Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd. T10N R15W S3 | S2 S10 | S11 1967 Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, shadscale and sagebrush.
	From the cor. of secs. 1, 2, 11 and 12. S. 89° 25' W., bet. secs. 2 and 11. Over gently rolling land through shadscale and sagebrush undergrowth.
6.00	Wash, drains S. 45° W.
40.23	Point for the 1/4 sec. cor. of secs. 2 and 11 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T10N R15W ¼ S2 / S11 1967 Raise a mound of stone, 2½ ft. base, 1½ ft. high, N. of cor.
46.85	Wash, 10 lks. wide, 2 ft. deep, drains S. 10° E.
68.70	Wash, 10 lks. wide, 2 ft. deep, drains S. 9° W.
79.95	Trail road, bears N. 26° W. and S. 26° E.
80.46	The cor. of secs. 2, 3, 10 and 11.

Dependent Resurvey of the Subdivision, T. 10 N., R. 15 W.

CHAINS	
	Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, shadscale and sagebrush.
	N. 0° 22' W., bet. secs. 2 and 3. Over gently rolling land through shadscale and sagebrush undergrowth.
1.20	Trail road, bears N. 26° W. and S. 26° E.
9.30	Gravel road, bears S. 66° W. and N. 66° E. to Kelton
24.90	Trail road, bears N. 63° E. and S. 63° W.
40.01	Point for the 1/4 sec. cor. of secs. 2 and 3 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground, and in a collar of stone, with brass cap mkd. T10N R15W ¼ S3|S2 1967
79.82	The cor. of secs. 2, 3, 34 and 35, on the N. bdy. of the Tp., hereinbefore described. Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, shadscale and sagebrush.
	From the cor. of secs. 3, 4, 33 and 34, on the S. bdy. of the Tp., hereinbefore described. N. 1° 32' W., bet. secs. 33 and 34. Over gently rolling land through shadscale and sagebrush undergrowth.
30.00	Wash, drains S. 50° E.
40.08	Point for the 1/4 sec. cor. of secs. 33 and 34 at proportionate dist.; there is no remaining evidence of the original cor.

Dependent Resurvey of the Subdivision, T. 10 N., R. 15 W.

CHAINS	
	Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground, and in a collar of stone, with brass cap mkd. T10N R15W ¼ S33|S34 1967
66.00	Wash, drains irregularly S. 10° E.
80.16	Point for the cor. of secs. 27, 28, 33 and 34 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd. T10N R15W S28|S27 S33|S34 1967 Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, shadscale and sagebrush.
	From the cor. of secs. 26, 27, 34 and 35. S. 89° 18' W., bet. secs. 27 and 34. Over gently rolling land through shadscale and sagebrush undergrowth.
4.50	Wash, drains irregularly S.
28.20	Old pipeline, bears N. 45° W. and S. 45° E.
39.50	Wash, drains S. 15° E.
40.26	Point for the 1/4 sec. cor. of secs. 27 and 34 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd. T10N R15W ¼ S27/S34 1967
66.50	Wash, drains S. 40° E.

Dependent Resurvey of the Subdivision, T. 10 N., R. 15 W.

CHAINS	
80.52	The cor. of secs. 27, 28, 33 and 34. Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, shadscale and sagebrush.
	N. 0° 49' W., bet. secs. 27 and 28. Over gently rolling land through shadscale and sagebrush undergrowth.
2.70	Wash, 10 lks. wide, 3 ft. deep, drains S. 84° E.
10.25	Wash, 10 lks. wide, 4 ft. deep, drains S. 67° E.
40.06	Point for the 1/4 sec. cor. of secs. 27 and 28 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd. T10N R15W ¼ S28 | S27 1967
44.70	Trail road, bears N. 72° W. and S. 72° E.
49.30	Old pipeline, bears N. 45° W. and S. 45° E.
55.35	Wash, 30 lks. wide, 4 ft. deep, drains S. 54° E.
59.75	Trail road, bears N. 46° W. and S. 46° E.
80.12	Point for the cor. of secs. 21, 22, 27 and 28 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd. T10N R15W S21 | S22 S28 | S27 1967 Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, shadscale and sagebrush.
	From the cor. of secs. 22, 23, 26 and 27. S. 89° 28' W., bet. secs. 22 and 27.

CHAINS	
	Over gently rolling land through shadscale and sagebrush undergrowth.
26.65	Wash, 150 lks. wide, 12 ft. deep, drains S.
40.37	Point for the 1/4 sec. cor. of secs. 22 and 27 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd. T10N R15W ¼ S22/S27 1967
53.50	Trail road, bears N. 45° W. and S. 45° E.
80.74	The cor. of secs. 21, 22, 27 and 28. Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, shadscale and sagebrush.
	N. 1° 09' W., bet. secs. 21 and 22. Over gently rolling land through shadscale and sagebrush undergrowth.
16.35	Trail road, bears N. 83° E. and S. 83° W.
40.07	Point for the 1/4 sec. cor. of secs. 21 and 22 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground, and in a collar of stone, with brass cap mkd. T10N R15W ¼ S21|S22 1967
80.14	Point for the cor. of secs. 15, 16, 21 and 22 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd. T10N R15W S16|S15 S21|S22 1967

Dependent Resurvey of the Subdivision, T. 10 N., R. 15 W.

CHAINS	
	Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, shadscale and sagebrush.
	From the cor. of secs. 14, 15, 22 and 23. S. 89° 36' W., bet. secs. 15 and 22. Over gently rolling land through shadscale and sagebrush undergrowth.
39.60	Wash, drains S. 5° W.
40.16	Point for the 1/4 sec. cor. of secs. 15 and 22 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd. T10N R15W ¼ S15/S22 1967
59.95	Trail road, bears N. 10° E. and S. 10° W.
80.32	The cor. of secs. 15, 16, 21 and 22. Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, shadscale and sagebrush.
	N. 0° 24' W., bet. secs. 15 and 16. Over gently rolling land through shadscale and sagebrush undergrowth.
5.00	Wash, drains S. 45° W.
40.06	Point for the 1/4 sec. cor. of secs. 15 and 16 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd. T10N R15W ¼ S16 | S15 1967

CHAINS	
72.05	Trail road, bears N. 69° E. and S. 69° W.
80.12	Point for the cor. of secs. 9, 10, 15 and 16 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T10N R15W S9 | S10 S16 | S15 1967 Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, shadscale and sagebrush.
	From the cor. of secs. 10, 11, 14 and 15. S. 89° 39' W., bet. secs. 10 and 15. Over gently rolling land through shadscale and sagebrush undergrowth.
18.00	Trail road, bears N. 73° W. and S. 73° E.
29.60	Same trail road, bears N. 80° E. and S. 80° W.
38.90	Wash, 25 lks. wide, 7 ft. deep, drains S.
40.38	Point for the 1/4 sec. cor. of secs. 10 and 15 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd. T10N R15W ¼ S10 / S15 1967
43.20	Same trail road, bears N. 47° E. and S. 47° W.
45.75	Wash, 15 lks. wide, 4 ft. deep, drains S. 24° W.
52.95	Wash, 30 lks. wide, 4 ft. deep, drains S. 15° W.
80.76	The cor. of secs. 9, 10, 15 and 16. Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, shadscale and sagebrush.

Dependent Resurvey of the Subdivision. T. 10 N. R. 15 W

CHAINS	
	N. 0° 56' W., bet. secs. 9 and 10.
	Over gently rolling land through shadscale and sagebrush undergrowth.
4.95	Wash, 10 lks. wide, 2 ft. deep, drains N. 70° E.
14.65	Wash, 10 lks. wide, 1 ft. deep, drains N. 60° E.
17.15	Wash, 15 lks. wide, 3 ft. deep, drains N. 33° E.
40.07	Point for the 1/4 sec. cor. of secs. 9 and 10 at proportionate dist.; there is no remaining evidence of the original cor.
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.
	T10N R15W ¼ S9 | S10 1967
78.45	Gravel road, bears S. 81° W. and N. 81° E. to Kelton.
80.14	Point for the cor. of secs. 3, 4, 9 and 10 at proportionate dist.; there is no remaining evidence of the original cor.
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.
	T10N R15W S4 | S3 S9 | S10 1967
	Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, shadscale and sagebrush.
	From the cor. of secs. 2, 3, 10 and 11.
	S. 89° 45' W., bet. secs. 3 and 10.
	Desc. 35 ft. over gently rolling land through shadscale and sagebrush undergrowth.
23.00	Wash, drains S. 10° E.; asc. 35 ft. over gently rolling land.
39.40	Trail road, bears N. 63° W. and S. 63° E.

Dependent Resurvey of the Subdivision, T. 10 N., R. 15 W.

CHAINS	
40.38	Point for the 1/4 sec. cor. of secs. 3 and 10 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground, and in a collar of stone, with brass cap mkd. T10N R15W ¼ S3/S10 1967
70.15 80.36 80.76	Gravel road, bears S. 81° W. and N. 81° E. to Kelton. Wash, 5 lks. wide, 1 ft. deep, drains S. 43° E. The cor. of secs. 3, 4, 9 and 10. Land, gently rolling. Soil, sandy clay. No timber. Undergrowth, shadscale and sagebrush.
	N. 0° 07' W., bet. secs. 3 and 4. Over gently rolling land through shadscale and sagebrush undergrowth.
0.40	Wash, 5 lks. wide, 1 ft. deep, drains S. 43° E.
40.06	Point for the 1/4 sec. cor. of secs. 3 and 4 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground, and in a collar of stone, with brass cap mkd. T10N R15W ¼ S4|S3 1967
48.70	Trail road, bears N. 60° E. and S. 60° W.
69.25	Utah State Highway No. 70, bears N. 15° 02' E. and S. 15° 02' W.
79.73	The cor. of secs. 3, 4, 33 and 34, on the N. bdy. of the Tp., hereinbefore described. Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, shadscale and sagebrush.
	From the cor. of secs. 4, 5, 32 and 33, on the S. bdy. of the Tp., hereinbefore described. N. 1° 23' W., bet. secs. 32 and 33.

286

Dependent Resurvey of the Subdivision, T. 10 N. R. 15 W.

CHAINS	
	Over gently rolling land through shadscale and sagebrush undergrowth.
23.60	Trail road, bears N. 80° E. and S. 80° W.
32.50	Old pipeline, bears N. 15° W. and S. 15° E.
40.09	Point for the 1/4 sec. cor. of secs. 32 and 33 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T10N R15W ¼ S32|S33 1967 Raise a mound of stone, 3 ft. base, 1½ ft. high, W. of cor.
43.20	Trail road, bears N. 30° W. and S. 30° E.
73.15	Wash, drains S. 60° E.
80.18	Point for the cor. of secs. 28, 29, 32 and 33 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T10N R15W S29|S28 S32|S33 1967 Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor. Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, shadscale and sagebrush.
	From the cor. of secs. 27, 28, 33 and 34. S. 89° 15' W., bet. secs. 28 and 33. Over gently rolling land through shadscale and sagebrush undergrowth.
18.00	Wash, drains S. 55° E.
40.01	Point for the 1/4 sec. cor. of secs. 28 and 33 at proportionate dist.; there is no remaining evidence of the original cor.

Dependent Resurvey of the Subdivision, T. 10 N., R. 15 W.

CHAINS	
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd. T10N R15W ¼ S28/S33 1967
69.85	Trail road, bears nearly N. and S.
75.00	Wash, drains S. 60° E.
80.02	The cor. of secs. 28, 29, 32 and 33. Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth
	N. 0° 45' W., bet. secs. 28 and 29. Over gently rolling land through shadscale and sagebrush undergrowth.
13.15	Trail road, bears S. 80° E. and curves N. 45° W.
21.85	Wash, drains S. 80° E.
36.15	Wash, drains S. 60° E.
40.08	Point for the 1/4 sec. cor. of secs. 28 and 29 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T10N R15W ¼ S29|S28 1967 Raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor. From this cor., a drinking fountain alongside State Highway No. 70, bears N. 51° 17' W., 16.10 chs. dist.
47.15	Trail road, bears N. 30° W. and curves E.
59.45	Trail road, bears N. 40° E. and S. 40° W.
68.35	Wash, drains S. 70° E.; enter scattered greasewood.
80.16	Point for the cor. of secs. 20, 21, 28 and 29 at proportionate dist.; there is no remaining evidence of the original cor.

Dependent Resurvey of the Subdivision, T. 10 N., R. 15 W.

CHAINS	
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T10N R15W S20 | S21 S29 | S28 1967 Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor. Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, shadscale, sagebrush and scattered greasewood.
	From the cor. of secs. 21, 22, 27 and 28. S. 89° 16' W., bet. secs. 21 and 28. Over gently rolling land through shadscale and sagebrush undergrowth.
11.65	Trail road, bears N. 45° W. and S. 45° E.
13.00	Wash, drains S. 45° E.
28.50	Old pipeline, bears N. 45° W. and S. 45° E.
37.85	Wash, drains S. 30° E.
40.02	Point for the 1/4 sec. cor. of secs. 21 and 28 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd. T10N R15W ¼ S21 / S28 1967
52.70	Trail road, bears N. 45° E. and S. 45° W.
61.55	Wash, drains S. 45° E.
80.04	The cor. of secs. 20, 21, 28 and 29. Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, shadscale, sagebrush and scattered greasewood.

CHAINS

N. 1° 13' W., bet. secs. 20 and 21.

Over gently rolling land through sagebrush and greasewood undergrowth.

21.65 Utah State Highway No. 70, bears N. 15° E. and S. 15° W.

24.00 Wash, drains S. 40° E.

40.09 Point for the 1/4 sec. cor. of secs. 20 and 21 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

T10N R15W

¼

S20|S21

1967

63.00 Wash, drains S. 35° E.

80.18 Point for the cor. of secs. 16, 17, 20 and 21 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground, and in a collar of stone, with brass cap mkd.

T10N R15W

S17|S16
S20|S21

1967

Land, gently rolling desert.
Soil, sandy clay.
No timber.
Undergrowth, sagebrush and greasewood.

From the cor. of secs. 15, 16, 21 and 22.

S. 89° 21' W., bet. secs. 16 and 21.

Over gently rolling land through shadscale and sagebrush undergrowth.

CHAINS	
5.50	Wash, drains S. 40° W.
40.02	Point for the 1/4 sec. cor. of secs. 16 and 21 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd. T10N R15W ¼ S16/S21 1967
62.95	Utah State Highway No. 70, bears N. 14° 55' E. and S. 14° 55' W.
71.30	Wash, drains S. 22° E.
80.04	The cor. of secs. 16, 17, 20 and 21. Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, shadscale and sagebrush.
	N. 0° 33' W., bet. secs. 16 and 17. Over gently rolling land through shadscale and sagebrush and scattered greasewood undergrowth.
11.00	Wash, drains S. 45° E.
40.08	Point for the 1/4 sec. cor. of secs. 16 and 17 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground, and in a collar of stone, with brass cap mkd. T10N R15W ¼ S17|S16 1967
49.35	Trail road, bears S. 75° E. and N. 75° W. to Rosebud Ranch.

CHAINS	
80.16	Point for the cor. of secs. 8, 9, 16 and 17 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd. T10N R15W S8 | S9 S17 | S16 1967 Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, shadscale, sagebrush and scattered greasewood.
	From the cor. of secs. 9, 10, 15 and 16. S. 89° 23' W., bet. secs. 9 and 16. Over gently rolling land through shadscale and sagebrush undergrowth.
40.06	Point for the 1/4 sec. cor. of secs. 9 and 16 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 15 ins. in the ground, and in a mound of stone, 4 ft. base to top, with brass cap mkd. T10N R15W ¼ S9 / S16 1967
41.08	Utah State Highway No. 70, bears N. 14° 55' E. and S. 14° 55' W.; enter scattered greasewood.
80.12	The cor. of secs. 8, 9, 16 and 17. Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, shadscale, sagebrush and scattered greasewood.

CHAINS	
	N. 0° 49' W., bet. secs. 8 and 9.
	Over gently rolling land through sagebrush and greasewood undergrowth.
40.08	Point for the 1/4 sec. cor. of secs. 8 and 9 at proportionate dist.; there is no remaining evidence of the original cor.
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd. T10N R15W ¼ S8|S9 1967
55.00	Wash, drains S. 60° E.
64.25	Gravel road, bears S. 81° 40' W. to Rosebud Ranch and N. 81° 40' E. to Kelton; leave greasewood.
74.75	Wash, 10 lks. wide, 3 ft. deep, drains E.
80.16	Point for the cor. of secs. 4, 5, 8 and 9 at proportionate dist.; there is no remaining evidence of the original cor.
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd. T10N R15W S5|S4 S8|S9 1967
	Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, shadscale, sagebrush and greasewood.
	From the cor. of secs. 3, 4, 9 and 10.
	S. 89° 25' W., bet. secs. 4 and 9

CHAINS	
	Over gently rolling land through shadscale and sagebrush undergrowth.
18.15	Utah State Highway No. 70, bears N. 15° E. and S. 15° W.
39.98	Point for the 1/4 sec. cor. of secs. 4 and 9 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd. T10N R15W ¼ S4/S9 1967
51.00	Wash, 10 lks. wide, 2 ft. deep, drains S. 62° E.
70.95	Wash, 15 lks. wide, 6 ft. deep, drains S. 48° E.
79.70	Wash, 12 ft. deep, drains S. 65° E.
79.96	The cor. of secs. 4, 5, 8 and 9. Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, shadscale and sagebrush.
	N. 0° 16' W., bet. secs. 4 and 5. Over gently rolling land through shadscale and sagebrush undergrowth.
0.20	Wash, 15 lks. wide, 5 ft. deep, drains S. 75° E.
40.08	Point for the 1/4 sec. cor. of secs. 4 and 5 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd. T10N R15W ¼ S5|S4 1967
44.00	Wash, drains S. 65° E.
80.08	The cor. of secs. 4, 5, 32 and 33; on the N. bdy. of the Tp., hereinbefore described. Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, shadscale and sagebrush.

Dependent Resurvey of the Subdivision, T. 10 N., R. 15 W.

CHAINS	
	From the cor. of secs. 5, 6, 31 and 32, on the S. bdy. of the Tp., hereinbefore described.
	N. 1° 37' W., bet. secs. 31 and 32.
	Over gently rolling land through shadscale and sagebrush undergrowth.
9.00	Wash, drains S. 50° E.
17.00	Wash, drains S. 50° E.
38.90	Wash, 50 lks. wide, 4 ft. deep, drains S. 40° E.
40.11	Point for the 1/4 sec. cor. of secs. 31 and 32 at proportionate dist.; there is no remaining evidence of the original cor.
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T10N R15W ¼ S31 | S32 1967
	Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.
46.80	Trail road, bears N. 60° W. and S. 60° E.
53.00	Wash, drains S. 50° E.
63.45	Wash, drains S. 45° E.
80.22	Point for the cor. of secs. 29, 30, 31 and 32 at proportionate dist.; there is no remaining evidence of the original cor.
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T10N R15W S30 | S29 S31 | S32 1967
	Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.
	Land, gently rolling desert. Soil, sandy. No timber. Undergrowth, shadscale and sagebrush.
	From the cor. of secs. 28, 29, 32 and 33.
	S. 89° 18' W., bet. secs. 29 and 32.

CHAINS	
	Over gently rolling land through shadscale and sagebrush undergrowth.
8.75	Old pipeline, bears N. 15° W. and S. 15° E.
16.15	Trail road, bears N. 45° W. and S. 45° E.
28.75	Utah State highway No. 70, bears N. 15° 10' E. and S. 15° 10' W.
30.85	Transmission line, parallel to highway.
40.35	Point for the 1/4 sec. cor. of secs. 29 and 32 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd. T10N R15W ¼ S29/S32 1967
80.70	The cor. of secs. 29, 30, 31 and 32. Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, shadscale and sagebrush.
	S. 89° 16' W., bet. secs. 30 and 31. Over gently rolling land through shadscale and sagebrush undergrowth.
40.21	Point for the 1/4 sec. cor. of secs. 30 and 31 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T10N R15W ¼ S30/S31 1967
45.70	Trail road, bears N. 45° W. and S. 45° E.
58.75	Wash, 30 lks. wide, 4 ft. deep, drains S. 65° E.
61.60	Trail road, bears N. 45° W. and S. 45° E.
79.95	The cor. of secs. 25, 30, 31 and 36, on the W. bdy. of the Tp., hereinbefore described.

CHAINS	
	Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, shadscale and sagebrush.
	From the cor. of secs. 29, 30, 31 and 32. N. 0° 23' W., bet. secs. 29 and 30. Over gently rolling land through shadscale and sagebrush undergrowth.
40.10	Point for the 1/4 sec. cor. of secs. 29 and 30 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground, and in a collar of stone, with brass cap mkd. T10N R15W ¼ S30|S29 1967
40.50	Wash, drains S. 55° E.
68.00	Small gully, 10 ft. deep, drains E.; enter greasewood.
80.20	Point for the cor. of secs. 19, 20, 29 and 30 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T10N R15W S19|S20 S30|S29 1967 Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor. Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, shadscale, sagebrush and greasewood.
	From the cor. of secs. 20, 21, 28 and 29. S. 89° 22' W., bet. secs. 20 and 29.

CHAINS	
	Over gently rolling land through sagebrush undergrowth.
6.20	Utah State Highway No. 70, bears N. 15° E. and S. 15° W. enter scattered greasewood.
8.35	Transmission line, parallel to highway.
11.20	Wash, drains S. 75° E.
28.60	Trail road, bears N. 14° W. and S. 14° E.
29.20	Pipeline, bears N. 13° 50' W. and S. 13° 50' E.
40.10	Point for the 1/4 sec. cor. of secs. 20 and 29 at proportionate dist.; there is no remaining evidence of the original cor.
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T10N R15W ¼ S20/S29 1967
	Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.
51.20	Trail road, bears N. 25° W. and S. 25° E.
80.20	The cor. of secs. 19, 20, 29 and 30.
	Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, sagebrush and greasewood.
	S. 89° 12' W., bet. secs. 19 and 30.
	Over gently rolling land through sagebrush and greasewood undergrowth.
9.50	Wash, drains S. 50° E.
40.19	Point for the 1/4 sec. cor. of secs. 19 and 30 at proportionate dist.; there is no remaining evidence of the original cor.
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T10N R15W ¼ S19/S30 1967
43.50	Wash, 10 lks. wide, 1 ft. deep, drains S. 85° E.
76.20	Trail road, bears N. and S.

CHAINS	
80.53	The Cor. of secs. 19, 24, 25, and 30, on the W. bdy. of the Tp., hereinbefore described. Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, sagebrush and greasewood.
	From the cor. of secs. 19, 20, 29 and 30. N. 1° 28' W., bet. secs. 19 and 20. Over gently rolling land through greasewood undergrowth.
40.11	Point for the 1/4 sec. cor. of secs. 19 and 20 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T10N R15W ¼ S19 | S20 1967 Raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor.
51.00	Wash, drains S. 55° E.
55.00	Wash, drains S. 20° E. from W.
68.55	Trail road, bears N. 60° W. and S. 60° E.
80.22	Point for the cor. of secs. 17, 18, 19 and 20 at cor. of old fence line, bearing N. and E.; it is harmoniously related with existing original cors., and is accepted as the best available evidence for the position of the original cor. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T10N R15W S18 | S17 S19 | S20 1967 Raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor. Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, sagebrush and greasewood.

CHAINS	
	From the cor. of secs. 16, 17, 20 and 21.
	S. 89° 28' W., bet. secs. 17 and 20.
	Over gently rolling land through sagebrush and greasewood undergrowth.
0.80	Transmission line, bears N. 2° W. and S. 2° E.
26.45	Wash, drains S. 6° E.
29.40	Wash, drains S. 43° E.
40.39	Point for the 1/4 sec. cor. of secs. 17 and 20 at proportionate dist.; there is no remaining evidence of the original cor.
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.
	T10N R15W ¼ S17/S20 1967
	Along remains of old fence line.
47.60	Trail road, bears S. 15° E. and curves N. 35° W.
48.60	Pipeline, bears S. 15° E. and curves N. 35° W.
80.78	The cor. of secs. 17, 18, 19 and 20.
	Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, sagebrush and greasewood.
	S. 89° 39' W., bet. secs. 18 and 19.
	Over gently rolling land through sagebrush and greasewood undergrowth.
16.90	Trail road, bears N. 45° W. and S. 45° E.
39.95	Point for the 1/4 sec. cor. of secs. 18 and 19 at proportionate dist.; there is no remaining evidence of the original cor.
	Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.
	T10N R15W ¼ S18/S19 1967
45.70	Trail road, bears N. and S.

Dependent Resurvey of the Subdivision, T. 10 N., R. 15 W.

CHAINS	
55.80	Wash, drains S. 45° E.
79.95	The cor. of secs. 13, 18, 19 and 24, on the W. bdy. of the Tp., hereinbefore described. Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, sagebrush and greasewood.
	From the cor. of secs. 17, 18, 19 and 20. N. 0° 23' W., bet. secs. 17 and 18. Over gently rolling land through sagebrush and greasewood undergrowth, and along old fence line.
39.85	Trail road, and pipeline, bears N. 49° W. and S. 49° E.
39.97	Point for the 1/4 sec. cor. of secs. 17 and 18 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T10N R15W ¼ S18 | S17 1967 Raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor.
40.28	Fence, bears N. 49° W. and S. 49° E.; leave old fence line; desc. 40 ft. over NE. slope.
47.55	Ditch, 5 lks. wide, 2 ft. deep, flows S. 50° E.; enter cultivated land.
59.75	Leave cultivated land; asc. 40 ft. over SW. slope.
67.50	Fence, bears N. 49° W. and S. 49° E., with trail road along N. side.
79.94	The cor. of secs. 7, 8, 17 and 18, monumented with the remains of old post, and steel rail 4 ft. above ground. The original cor. was found by the Union Pacific Railroad survey in 1918, and was remonumented with a rail. I accept this as the true cor. point. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground, with steel rail alongside, and brass cap mkd. T10N R15W S7 | S8 S18 | S17 1967

CHAINS	
	Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, sagebrush and greasewood.
	From the cor. of secs. 8, 9, 16 and 17. S. 89° 22' W., bet. secs. 8 and 17. Over gently rolling desert land through sagebrush and greasewood undergrowth.
1.56	Transmission line, bears N. 0° 18' W. and S. 0° 18' E.
40.29	Point for the 1/4 sec. cor. of secs. 8 and 17 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd. T10N R15W ¼ S8/S17 1967
61.65	Trail road, bears N. 67° W. and S. 67° E.
80.58	The cor. of secs. 7, 8, 17 and 18. Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, sagebrush and greasewood.
	S. 89° 29' W., bet. secs. 7 and 18. Over gently rolling land through sagebrush and greasewood undergrowth.
15.75	Fence, bears N. 49° W. and S. 49° E., with trail road along N. side; enter cultivated land.
27.80	Ditch, drains S. 50° E. from N.
28.30	Trail road, bears N. 41° W. and S. 41° E.
30.00	Pipeline, bears N. 41° W. and S. 41° E.
40.00	Point for the 1/4 sec. cor. of secs. 7 and 18 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

Dependent Resurvey of the Subdivision, T. 10 N., R. 15 W.

CHAINS

T10N R15W

¼ S7/S18

1967

40.30 Leave cultivated land.

41.60 Wash, drains S. 35° E.

48.28 Fence, bears S. 56° E. and N. 56° W.

51.30 Trail road, bears N. 56° W. and S. 56° E.

67.00 Trail road, bears N. 5° E. and S. 5° W.

68.00 Enter dense juniper timber.

80.28 The cor. of secs. 7, 12, 13 and 18, on the W. bdy. of the Tp., hereinbefore described.

Land, gently rolling desert.
Soil, sandy clay.
Timber, dense juniper, W. portion.
Undergrowth, sagebrush and greasewood.

From the cor. of secs. 7, 8, 17 and 18.

N. 0° 25' W., bet. secs. 7 and 8.

Over gently rolling land through shadscale and sagebrush undergrowth.

5.75 Trail road, bears N. 80° W. and S. 80° E.; enter greasewood.

39.94 The 1/4 sec. cor. of secs. 7 and 8, monumented with a pine post, badly decayed, and a steel rail, 5 ft. above ground. The original cor. was found by the Union Pacific Railroad survey in 1918, and was remonumented with a steel rail. I accept this as the true cor. point.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T10N R15W

¼

S7|S8

1967

Bury original pine post cor. alongside iron post.

Set steel rail alongside iron post, and raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

N. 1° 27' W., beginning new measurement.

15.50 Gravel road, bears S. 83° W. to Rosebud Ranch and N. 83° E. to Kelton.

Dependent Resurvey of the Subdivision, T. 10 N., R. 15 W.

CHAINS	
37.00	Wash, drains S. 80° E.
40.50	The cor. of secs. 5, 6, 7 and 8, monumented with a steel rail, 4 ft. above ground. The Union Pacific Railroad survey found the original cor. in 1918, and remonumented it with a steel rail. I accept this as the true cor. point. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T10N R15W S6 | S5 S7 | S8 1967 Set the steel rail alongside iron post, and raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor. Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, sagebrush, shadscale and greasewood.
	From the cor. of secs. 4, 5, 8 and 9. S. 89° 33' W., bet. secs. 5 and 8. Over gently rolling land through sagebrush and greasewood undergrowth.
1.00	Transmission line, bears N. and S.
40.36	Point for the 1/4 sec. cor. of secs. 5 and 8 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd. T10N R15W ¼ S5 / S8 1967
68.90	Gravel road, bears S. 50° 13' E. and N. 50° 13' W. to Bureau of Land Management Field Camp.
69.70	Transmission line, parallel to gravel road.
80.72	The cor. of secs. 5, 6, 7 and 8. Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, sagebrush and greasewood.

Dependent Resurvey of the Subdivision, T. 10 N., R. 15 W.

CHAINS

S. 89° 21' W., bet. secs. 6 and 7.

Over gently rolling land through sagebrush and greasewood undergrowth.

8.90 Trail road, bears N. 31° E. and S. 31° W.

24.00 Wash, drains S. 80° E.

39.39 The 1/4 sec. cor. of secs. 6 and 7, monumented with pine post, dimly mkd. 1/4, with a steel rail alongside. This point was remonumented with a steel rail in the 1918 survey by the Union Pacific Railroad.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T10N R15W

¼ S6/S7

1967

Bury original pine post cor. alongside iron post.

Set the steel rail alongside iron post.

S. 89° 21' W., beginning new measurement.

1.50 Trail road, bears nearly N. and S.

1.65 Ditch, 10 lks. wide, 2 ft. deep, flows S.

35.70 Trail road, bears N. 24° W. and S. 24° E.

40.39 The cor. of secs. 1, 6, 7 and 12, on the W. bdy. of the Tp., hereinbefore described.

Land, gently rolling desert.
Soil, sandy clay.
No timber.
Undergrowth, sagebrush and greasewood.

From the cor. of secs. 5, 6, 7 and 8.

N. 0° 02' E., bet. secs. 5 and 6.

Over gently rolling land through sagebrush and greasewood undergrowth.

9.40 Trail road, bears N. 58° E. and S. 58° W.

10.00 Transmission line, bears N. 50° 13' W. and S. 50° 13' E.

10.90 Gravel road, bears S. 50° 13' E. and N. 50° 13' W. to Bureau of Land Management Field Station.

CHAINS	
19.50	Wash, drains S. 75° E.
39.77	Point for the 1/4 sec. cor. of secs. 5 and 6 at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd. T10N R15W ¼ S6 | S5 1967 From this cor., the NW. cor. of the maintenance shop, Bureau of Land Management Field Station, bears S. 82° 58' W., 33.19 chs. dist. From the same corner a spring bears N. 86° 24' W., 38.78 chs.
58.60	Wash, 15 lks. wide, 3 ft. deep, drains S. 43° E.
80.02	The cor. of secs. 5, 6, 31 and 32, on the N. bdy. of the Tp., hereinbefore described. Land, gently rolling desert. Soil, sandy clay. No timber. Undergrowth, sagebrush and greasewood.

General Description

Township 10 North, Range 15 West is located about 25 miles south of Park Valley, Utah. It is gently rolling desert land covered with shadscale, sagebrush and scattered greasewood undergrowth. Timber consists of scattered juniper along the north and west edges. The soil is sandy clay. It is drained in a southerly direction by numerous washes. State Highway No. 70 enters the township at the northwest corner of section 3 and bears southwesterly leaving the township at the southwest portion of section 32. There are numerous trailroads throughout the township. A good gravel road from Rosebud Ranch, located in portions of sections 7 and 18, bears easterly through the township to Kelton, Utah. The only habitations in the township are Rosebud Ranch and the Bureau of Land Management Field Station located in section 6. There is a spring of fresh water located in the NE¼ of section 6 that supplies the field station and the ranch with water. A pipeline enters the township somewhere along the west boundary of section 7 and bears southeasterly through the township, supplying drinking water at a fountain along highway 70 in section 29, and water for stock in Township 9 North, Range 15 West. The elevation of the township is about 5,000 ft. above sea level.

Blank

Page

Form 9180-8
(August 1967)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS

NAMES	CAPACITY
Max Asay	Surveying Technician
Michael W. Trentzsch	Surveying Aid
Paul J. Middelstatt	Surveying Aid
William J. Jensen	Surveying Aid
Arthur K. VanBuren	Surveying Aid

CERTIFICATE OF SURVEY

We, Fred R. Chappell and Glen B. Hatch, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 20th day of February, 19 67, We have have dependently resurveyed the Guide Meridian West (East Bdy.), the Boundary, the West Boundary, the North Boundary, and the subdivisional lines of Township 10 North, Range 15 West

of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

May 1, 1969
(Date)

Glen B. Hatch
(Cadastral Surveyor)
SUPERVISORY

May 7, 1968
(Date)

Fred R. Chappell
(Cadastral Surveyor)
SUPERVISORY

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT,
Washington, D. C.

The foregoing field notes of the dependent resurvey of the Guide Meridian West (East Bdy.), the South Boundary, the West Boundary, the North Boundary, and the subdivisional lines of Township 10 North, Range 15 West, Salt Lake Meridian, Utah

executed by Fred R. Chappell, Supervisory Cadastral Surveyor and
Glen B. Hatch, Supervisory Cadastral Surveyor
having been critically examined and found correct, are hereby approved.

MAY 1 6 1969
(Date)

Clark F. Gumm
~~(Chief, Division of Engineering)~~
Chief, Division of Cadastral Survey

CERTIFICATE OF TRANSCRIPT

~~I CERTIFY That the foregoing transcript of the field notes of the above-described surveys in~~

, is a true copy of the original field notes.

~~(Date)~~ ~~(Chief, Division of Engineering)~~

Blank

Page

Blank

Page

Form 9180-6
(April 1965)
(formerly 4-679)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

311

ORIGINAL

FIELD NOTES

OF THE

DEPENDENT RESURVEY

OF

THE SALT LAKE BASE LINE ALONG THE SOUTH BOUNDARY

A PORTION OF THE WEST BOUNDARY AND

A PORTION OF

THE SUBDIVISIONAL LINES

OF

TOWNSHIP 1 NORTH, RANGE 23 EAST

Of the SALT LAKE Meridian,

In the State of UTAH.

EXECUTED BY

FRED R. CHAPPELL SUPERVISORY CADASTRAL SURVEYOR

Under special instructions dated MAY 25, 19 62, which provided for the surveys included under Group Number 456, approved JUNE 8, 1962, and assignment instructions dated JUNE 8, 19 62.

Survey commenced SEPTEMBER 2, 19 64

Survey completed NOVEMBER 3, 19 64

INDEX DIAGRAM

Township 1 NORTH, Range 23 EAST,

6	5	38 38 4	37 38 3 35	37 2 23 35	24 1 22
7 72	8 69	9 58	10 33 47	11 20 33	12 20
18 70 68	17 56 67	16 46 55	15 31 45	14 19 31	13 18
19 65 64	20 52 63	21 44 54	22 29 41	23 17 27	24 14
30 62 61	29 51 60	28 43 49	27 28 40	26 15 25	25 13
73 31 59 10	32 48 9	33 39 7	34 24 5	35 12 4	36 2

GPO 849-505

Dependent Resurvey of a portion of Township, 1 North, Range 23 East.

CHAINS

The north boundary of Township 1 North, Range 23 East, was surveyed by S. P. and J. R. Stewart, in 1906, and the east four miles were concurrently resurveyed by Fred R. Chappell, under this same group. The east boundary was surveyed by A. Jessen, in 1898, retraced by S. P. and J. R. Stewart, in 1906, and was concurrently resurveyed by Fred R. Chappell, under this same group. The Salt Lake Base Line along the south boundary was surveyed by A. D. Ferron, in 1878, and the East 4 miles were retraced by S. P. and J. R. Stewart, in 1906. The closing corners along the south boundary, were established by E. Beuttner, in 1879, in connection with the survey of Township 1 South, Ranges 23 and 24 East. The Ashley Guide Meridian along the south 3 miles of the west boundary was surveyed by A. D. Ferron, in 1879, the north 3 miles were surveyed by S. P. and J. R. Stewart, in 1906, and in 1938, J. C. Clark, resurveyed the entire boundary under group 175. In 1879, A. D. Ferron, surveyed sections 19, 20, and sections 29 to 35 inclusive, and in 1906, S. P. and J. R. Stewart, completed the subdivision of the township, along with various retracements. The following field notes are those of a dependent resurvey of the Salt Lake Base Line along the south boundary, a retracement of the Ashley Guide Meridian along a portion of the west boundary, and the dependent resurvey of a portion of the subdivisional lines of Township 1 North, Range 23 East.

The survey was executed in accordance with the specifications as set forth in the Manual of Instructions, 1947, and the special instructions dated May 25, 1962.

Before restoring the corners, the lines of the original survey were retraced, and a diligent search made for evidence of the original corners, bearing trees, and other calls of the original field note record. When duly identified the corner positions were remonumented.

The rules of proportionate measurement were applied to ascertain the position of lost corners, but not until exhausting every reasonable possibility of finding direct evidence for the control of each particular corner.

The direction of the lines of the resurvey were determined by the solar transit method.

The lengths of the lines were determined by chaining, where the lines were accessible; lines inaccessible were run by traverse or triangulation methods. Distances to topography on lines run by triangulation or traverse methods are approximate as scaled from reliable U. S. G. S. topographic sheets. The details of such triangulations or traverses have been thoroughly checked and verified, and in order to simplify the record the diagrams and reductions are omitted from these field notes.

The geographic position for the southeast corner of the township is at Latitude 40° 46' 14.25" N., and longitude 109° 15' 28.77" W. as adjusted from traverses to U.S.C. and G.S. triangulation stations, "Linwood," at latitude 41° 00' 14.202" N. and longitude 109° 27' 39.022" W., located N. 29° 47' 30" E., 86.75 chains distant, from the corner of sections 17, 18, 19 and 20, T. 3 N., R. 22 E., and "Clay Basin," at latitude 41° 00' 06.048" N., and

Dependent Resurvey of a portion of Township, 1 North, Range 23 East.

CHAINS

longitude 109° 12' 27.304" W., located N. 41° 17' E., 85.51 chains distant, from the corner of sections 16, 17, 20 and 21, T. 3 N., R. 24 E.

The magnetic declination was read at a number of stations throughout the survey and the average of the several readings was found to be 16° E.

Dependent Resurvey of the Salt Lake Base Line Along the South Boundary of T. 1 N., R. 23 E.

Reestablishment of the survey executed by A. D. Ferron in 1878, and retraced by S. P. and J. R. Stewart in 1906.

From the standard corner, of T. 1 N., Rs. 23 and 24 E., monumented with an iron post, 2½ ins. in diam., set and marked as described in the record of 1964 resurvey of T. 1 N., R. 24 E.

S. 89° 22' W., along the S. bdy. of sec. 36.

Over mountainous land, through dense timber; asc. 20 ft. along a N. slope.

7.60 Top of mountain bears E. and W.; desc. 85 ft. over gentle W. slope.

24.30 Slope becomes broken; desc. 275 ft. over a W. slope.

38.03 Point for the ¼ sec. cor. of sec. 6, T. 1 S., R. 24 E., at proportionate dist. between closing cors.

Set an iron post, 30 ins. long, 2½ ins. in diam., 8 ins. in the ground, to solid rock and in a mound of stone, 4½ ft. base to top, with brass cap mkd.

¼ S6
T1S R24E

1964

Desc. 105 ft. over a W. slope.

44.55 The standard ¼ sec. cor. of sec. 36, monumented with a sandstone, 12x6x4 ins., firmly set in the ground, and mkd. BC ¼ on the N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 10 ins. in the ground, to solid rock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

SC
T1N R23E
¼ S36

1964

Dependent Resurvey of the Salt Lake Base Line,
T. 1 N., R. 23 E.

CHAINS	
	Bury the original stone cor. in the mound, alongside the iron post.
	S. 89° 04' W., beginning new measurement.
	Desc. 40 ft. over a W. slope.
7.00	Hollow, drains S.; asc. 80 ft. over an E. slope.
9.00	Spur, projects S.; leave timber; desc. 315 ft. over a W. slope.
34.22	The closing cor. of secs. 1 and 6, T. 1 S., Rs. 23 and 24 E., monumented with a sandstone, 12x7x5 ins. firmly set in the ground, and mkd. with 6 grooves on the E. and W. face, and 6 grooves and CC on the S. face.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. in diam., 22 ins. in the ground, with brass cap mkd.
	S36 S1 | S6 C C T1S R23E R24E 1964
	Raise a mound of stone, 3 ft. base, 2 ft.high, S. of the cor.
	Deposit the original stone cor. below the surface of the ground, alongside the iron post.
	Desc. 45 ft. over a gentle W. slope.
43.12	The standard cor. of secs. 35 and 36, monumented with a sandstone, 12x10x4 ins. firmly set in the ground, and mkd. with 1 notch on the E., 5 notches on the W., and 6 notches and BC on the N. side.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. in diam., 22 ins. in the ground, with brass cap mkd.
	S C T1N R23E S35 | S36 S1 1964
	Raise a mound of stone, 3½ ft. base 2½ ft. high N. of the cor.
	Bury the original stone cor. below the surface of the ground alongside the iron post.

Dependent Resurvey of the Salt Lake Base Line, S. Bdy., N. R. 23 E

CHAINS	
	Land, mountainous. Soil, rocky clay loam. Timber, dense to scattered pine, fir and aspen. Undergrowth, patches of dense sagebrush and grass, scattered buckbrush and service berry.
	S. 89° 15' W., along the S. bdy. of sec. 35. Over canyon bottomland, through dense undergrowth; desc. 54 ft. along a gentle N. slope.
25.00	Enter grove of aspen timber.
29.50	Point for the ¼ sec. cor. of sec. 1, T. 1 S., R. 23 E., at midpoint between closing cors. Set an iron post, 30 ins. long, 2½ ins. in diam., 22 ins. in the ground, and in a collar of stone, with brass cap mkd. ¼ S1 T1S R23E 1964
40.30	The standard ¼ sec. cor. of sec. 35, monumented with a sandstone, 12x6x4 ins. set in a mound of stone, and mkd. BC ¼ on the N. face. At the cor. point Set an iron post, 30 ins. long, 2½ ins. in diam., 18 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd. SC T1N R23E ¼ S35 1964 Bury the original stone cor. below the surface of the ground alongside the iron post.
	S. 89° 10' W., beginning new measurement. Over nearly level land, through dense aspen timber.
12.00	Leave aspen timber.
20.60	Old high water mark, on Calders Pond, bears NE. and SW.
27.60	The closing cor. of secs. 1 and 2, T. 1 S., R. 23 E., monumented with a sandstone, 10x8x6 ins. firmly set in the ground, and mkd. with 1 groove on the E., 5 grooves on the W., 6 grooves and CC on the S. face. At the cor. point

Dependent Resurvey of the Salt Lake Base Line, S. Bdy., T. 1 N., R. 23 E.

CHAINS	
	Set an iron post, 30 ins. long, 2½ ins. in diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.
	S35 [illegible] S2 S1 [illegible] T1S R23E [illegible] 196[illegible]
	Bury the original stone cor. below the surface of the ground alongside the iron post.
[illegible]	[illegible] water [illegible] of [illegible] bears [illegible]
[illegible]	[illegible] water [illegible] bears [illegible]
[illegible]	[illegible] set [illegible] firmly [illegible] mkd. with [illegible] grooves [illegible]
	At the [illegible]
	[illegible]
	[illegible]
	[illegible]
	[illegible]
	Land, [illegible]
	Soil, [illegible]
	Timber, [illegible]
	[illegible]
	[illegible] along the [illegible]
	Over nearly level bottomland, through dense undergrowth.
[illegible]	[illegible] high water mark, of [illegible] bears [illegible]
[illegible]	Set wire fence, bears NW. and SE.
[illegible]	Point for the ¼ sec. cor. of sec. 2, T. 1 S., R. 23 E., at midpoint between closing cors.
	Set an iron post, 30 ins. long, 2½ ins. in diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.

Dependent Resurvey of the Salt Lake Base Line, S. Bdy., T. 1 N., R. 23 E.

CHAINS

¼ S2
T1S R23E

1964

40.39 The standard ¼ sec. cor. of sec. 34 monumented with a sandstone, 18x6x6 ins., firmly set in the ground, and mkd. ¼ and BC on the N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

SC
T1N R23E
¼ S34

1964

Raise a mound of stone, 3 ft. base, 2½ ft. high N. of the cor.

Bury the original stone cor. below the surface of the ground alongside the iron post.

S. 89° 12' W., beginning new measurement.

Over gently rolling land, through dense undergrowth.

6.70 Net wire fence, bears NE. and SW.

8.00 Wash, 5 ft. deep, 22 lks. wide, drains NE.

15.00 Wash, 3 ft. deep, 10 lks. wide, drains NE.

18.70 Pot Creek, dry, 4 ft. deep, 20 lks. wide, drains irregularly NE. into Calders Pond.

27.42 The closing cor. of secs. 2 and 3, T. 1 S., R. 23 E., monumented with a sandstone, 12x10x4 ins. firmly set in the ground, and mkd. with 2 grooves on the E., 4 grooves on the W., 6 grooves and CC on the S. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 18 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

S34
S3 | S2
C C
T1S R23E

1964

Bury the original stone cor. below the surface of the ground, alongside the iron post.

29.90 Improved dirt road, Vernal, Utah, to the Little Hole crossing of the Green River, bears NE. and irregularly S

Dependent Resurvey of the Salt Lake Base Line, S. Bdy., T. 1 N., R. 23 E.

CHAINS	
40.10	The standard cor. of secs. 33 and 34, monumented with a sandstone, 13x6x6 ins. firmly set in the ground, and mkd. with 3 notches on the E., 3 notches on the W., 6 notches and BC on the N. face. At the cor. point Set an iron post, 30 ins. long, 2½ ins. in diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd. SC T1N R23E S33 | S34 S3 1964 Raise a mound of stone, 3 ft. base, 2 ft. high N. of cor. Bury the original stone cor. below the surface of the ground alongside the iron post. Land, nearly level bottomland. Soil, sandy loam. No timber. Undergrowth, dense sagebrush and grass.
	S. 89° 06' W., along the S. bdy. of sec. 33. Over gently rolling land, through dense undergrowth.
2.30	Net wire fence, bears N. and S.; asc. 30 ft. over an E. slope.
6.10	Low spur, projects S.; thence along a gentle S. slope.
27.31	Point for the ¼ sec. cor. of sec. 3, T. 1 S., R. 23 E., at midpoint between closing cor. Set an iron post, 30 ins. long, 2½ ins. in diam., 22 ins. in the ground, and in a collar of stone, with brass cap mkd. ¼ S3 T1S R23E 1964 Raise a mound of stone, 3 ft. base, 2 ft. high, S. of the cor.
40.21	The standard ¼ sec. cor. of sec. 33, monumented with a sandstone, 8x6x6 ins. firmly set in the ground, and mkd. BC ¼ on the N. face. At the cor. point Set an iron post, 30 ins. long, 2½ ins. in diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.

Dependent Resurvey of the Salt Lake Base Line, S. Bdy., T. 1 N. R. 23 E.

CHAINS

SC
T1N R23E
¼ S33

1964

Bury the original stone cor. below the surface of the ground, alongside the iron post.

S. 89° 11' W., beginning new measurement.

Over nearly level land, through medium dense undergrowth.

2.00 Jeep road bears NE. and SW.

27.09 The closing cor. of secs. 3 and 4, T. 1 S., R. 23 E., monumented with a sandstone, 15x10x8 ins. firmly set in the ground, and mkd. with 3 grooves on the E., 3 grooves on the W., and 6 grooves and CC on the S. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 22 ins. in the ground, with brass cap mkd.

S33
S4 | S3
C C
T1S R23E

1964

Raise a mound of stone, 3 ft. base, 2 ft. high, S. of the cor.

Bury the original cor. below the surface of the ground, alongside the iron post.

40.21 The standard cor. of secs. 32 and 33, monumented with a sandstone, 15x10x8 ins. firmly set in the ground, and mkd. with 4 notches on the E., 2 notches on the W., and BC on the N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 8 ins. in the ground, to solid rock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

SC
T1N R23E
S32 | S33
S4

1964

Bury the original stone cor. in the mound, alongside the iron post.

Land, nearly level bottomland.
Soil, rocky, sandy clay.
No timber.
Undergrowth, medium dense sagebrush and grass.

CHAINS	
	S. 89° 15' W., along the S. bdy. of sec. 32.
	Over nearly level bottomland, through medium dense undergrowth.
15.70	Dry bed of Pot Creek, 4 ft. deep, 10 lks. wide, drains SE.; asc. 10 ft. over a gentle E. slope.
27.26	Point for the ¼ sec. cor. of sec. 4, T. 1 S., R. 23 E., at midpoint between closing cors.
	Set an iron post, 30 ins. long, 2½ ins. in diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.
	¼ S4 T1S R23E 1964
30.30	Unimproved dirt road, bears N. and S.
40.32	The standard ¼ sec. cor. of sec. 32, monumented with a sandstone, 10x10x6 ins. firmly set in the ground, and mkd. BC ¼ on the N. face.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.
	SC T1N R23E ¼ S 32 1964
	Bury the original stone cor. below the surface of the ground, alongside the iron post.
	The above cor. is set on the SW. side of a fence cor.; fences bear W., S. and irregularly N.
	S 89° 05' W., beginning new measurement.
	Asc. 130 ft. over a gentle E. slope, along S. side of fence.
23.40	Underground, natural gas pipeline, bears N. 11° 05' W., and S. 11° 05' E.
27.31	Fall 22 lks. S. of the closing cor. of secs. 4 and 5, T. 1 S., R. 23 E., monumented with a sandstone, 12x12x4 ins. firmly set in the ground, and mkd. with 4 grooves on the E., 2 grooves on the W., 6 grooves and CC on the S. face. I mark this cor. AM for an amended monument.
	At a point 22 lks. S. of the above cor. (on true line).
	Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.

Dependent Resurvey of the Salt Lake Base Line, S. Bdy., T. 1 N., R. 23 E.

CHAINS

S32
S5 | S4
C C
T1S R23E

1964

Raise a mound of stone, 3 ft. base, 2 ft. high S. of the cor.

27.40 Fence, bears S., and N. for 22 lks. then E.

29.30 Power line, bears N. 11° 05' W., and S. 11° 05' E.

34.50 Unimproved dirt road, bears NW. and SE.

40.22 The standard cor. of secs. 31 and 32, monumented with a sandstone 18x12x4 ins. set in a mound of stone, and mkd. with 5 notches on the E., 1 notch on the W., and BC on the N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.

SC
T1N R23E
S31 | S32
S5

1964

Raise a mound of stone, 3 ft. base, 2½ ft. high, N. of the cor.

Bury the original stone cor. below the surface of the ground, alongside the iron post.

Land, gently rolling mountain bench.
Soil, rocky, clay loam.
No timber.
Undergrowth, medium dense, sagebrush and grass.

S. 88° 41' W., along the S. bdy. of sec. 31.

Over gently rolling land; desc. 105 ft. over a NW. slope, through medium dense undergrowth.

21.95 Dry creek bed, drains SE.

29.57 Point for the ¼ sec. cor. of sec. 5, at midpoint between closing cors.

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.

¼ S 5
T1S R23E

1964

CHAINS	
	Set a cedar post, 7 ft. long, 6 ins. in diam., 1 lk. NE. of the cor.
30.30	Dirt road, Vernal, Utah, to Davenport Draw, bears NE. and SW.
40.34	The standard ¼ sec. cor. of sec. 31, monumented with a limestone, 5x4x3 ins. deposited in a small mound of stone, and mkd. with an x (cross).
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.
	SC T1N R23E ¼ S31 1964
	Raise a mound of stone, 3 ft. base, 2 ft. high, N. of the cor.
	Bury the original stone cor. below the surface of the ground, alongside the iron post.
	S. 89° 07' W., beginning new measurement.
	Over nearly level land, sloping gently to the E.
21.40	Wash, 3 ft. deep, 12 lks. wide, drains SE.
31.71	The closing cor. of secs. 5 and 6, T. 1 S., R. 23 E., monumented with a sandstone, 10x6x6 ins. firmly set in the ground, and mkd. with 1 groove on the W., 5 grooves on the E., 6 grooves and CC on the S. face.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.
	S31 S6 | S5 C C T1S R23E 1964
	Bury the original stone cor. below the surface of the ground, alongside the iron post.
40.08	The standard cor. of Ts. 1 N., Rs. 22 and 23 E., monumented with an iron post, 3 ins. in diam., set and mkd. as described in the 1936 resurvey record.
	Land, nearly level bench. Soil, sandy clay, loam. No timber. Undergrowth, medium dense sagebrush and grass.

324

CHAINS	
	Dependent Resurvey of a portion of the subdivision of T. 1 N., R. 23 E.
	Reestablishment of the survey executed by A. D. Ferron, in 1879, and retraced by S. P. and J. R. Stewart, in 1906.
	From the standard cor. of secs. 35 and 36, on the S. bdy. of the Tp.
	N. 0° 37' W., between secs. 35 and 36.
	Over bottomland, through medium dense undergrowth; desc. 55 ft. over a gentle N. slope.
18.00	Hollow, drains SW. into Calders Pond.
24.00	Jeep road, bears NE. and SW.; asc. 55 ft. over a S. slope.
40.01	The ¼ sec. cor. of secs. 35 and 36, monumented with a sandstone, 20x6x6 ins. firmly set in the ground, and mkd. ¼ on the W. face.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.
	T1N R23E ¼ S35|S36 1964
	Raise a mound of stone, 3 ft. base, 2 ft. high, W. of the cor.
	Bury the original stone cor. below the surface of the ground, alongside the iron post.
	N. 0° 34' W., beginning new measurement.
	Over mountainous land, through dense undergrowth, asc. 695 ft over a broken S. slope.
35.20	Enter timber, asc. 50 ft. along a SW. slope.
41.14	The cor. of secs. 35 and 36, monumented, with a sandstone, 10x8x6 ins. firmly set in the ground, and mkd. with 1 notch on the S. and E. edges.
	From which the original bearing trees
	A pine, 14 ins. in diam., bears S. 22° E., 28 lks. dist., mkd. T1N R23E S36 BT
	A pine, 17 ins. in diam., bears S. 46° 30' W., 33 lks. dist., mkd. T1N R23E S35 BT.

Dependent Resurvey of a portion of the subdivision of T. 1 N., R. 23 E.

CHAINS	
	At the cor. point Set an iron post, 30 ins. long, 2½ ins. in diam., 8 ins. in the ground, to solid rock, and in a mound of stone, 3 ft. base to top, with brass cap mkd. T1N R23E S26 S35 | S36 1964 Bury the original stone cor. in the mound, alongside the iron post. Land, nearly level canyon bottom the first ½ mile, steep mountainous the balance. Soil, sandy, loam and rocky clay. No timber, the first 75.00 chs. dense pine the balance. Undergrowth, medium dense sagebrush and grass.
	Reestablishment of the survey executed by S. P. and J. R. Stewart in 1906. S. 89° 57' E., along the N. bdy. of sec. 36. Over mountainous land, through dense timber; asc. 25 ft. over a W. slope.
2.10	Spur, projects S., timber becomes scattered; desc. 210 ft. over ledges and rock slides sloping E.
8.08	The closing cor. of secs. 25 and 26, hereinafter described. Desc. 256 ft. over a SE. slope.
17.10	Leave rockslide; desc. 142 ft. along a S. slope.
40.10	The ¼ sec. cor. originally set for secs. 25 and 36, now functionsfor sec. 36 only, monumented with a sandstone 20x8x8 ins., firmly set in the ground and mkd. ¼ on the N. face. At the cor. point Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd. T1N R23E ¼ S36 1964 Raise a mound of stone, 3 ft. base, 2 ft. high, N. of the cor. Bury the original stone cor. in the ground, alongside the iron post.

Dependent Resurvey of a portion of the subdivision of T. 1 N., R. 23 E.

CHAINS

N. 89° 46' E., beginning new measurement.

Over mountainous land, through scattered timber, and dense undergrowth; desc. 30 ft. along a S. slope.

8.03 Point for the S. ¼ Sec. cor. of sec. 25, at midpoint between closing cors.

Set an iron post, 30 ins. long, 2½ ins. in diam., 8 ins. in the ground, to solid rock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T1N R23E
¼ S25

1964

11.10 Enter grove of aspen timber; asc. 50 ft. over a W. slope.

17.40 Leave timber; asc. 267 ft. over a W. slope, through dense undergrowth.

24.60 Spur, projects S.; desc. 203 ft. over an E. slope.

38.10 Jeep road, in bottom of hollow, bears NE. and SW., hollow drains SW.; asc. 50 ft. over a W. slope.

43.10 Enter grove of aspen.

48.08 The closing cor. of secs. 25 and 36, on the E. bdy. of the Tp., monumented with an iron post, 2½ ins. in diam., conforming to the record of the 1964 resurvey of T. 1 N., R. 24 E.

From the above cor. the cor. of secs. 30 and 31, T. 1 N., R. 24 E., bears N. 0° 15' W., 3.13 chs. dist., monumented with an iron post, 2½ ins. in diam., set, mkd. an witnessed as described in the 1964 resurvey record, of the W. bdy. of T. 1 N., R. 24 E.

Land, mountainous.
Soil, rocky, clay and sandy loam.
Timber, patches of aspen, and pine, with scattered juniper.
Undergrowth, medium dense sagebrush, grass, with patches of dense wild apple and service berry.

From the cor. of secs. 19, 24, 25 and 30, on the E. bdy. of the Tp. monumented with an iron post, 2½ ins. in diam., as described in the record of the 1964 resurvey of T. 1 N., R. 24 E.

S. 89° 56' W., between secs. 24 and 25.

Over gently rolling canyon bottomland; desc. 155 ft. over a W. slope.

31.90 Dry pond, 40 ft. wide, bears N. 4.00 chs. dist.

40.06 The ¼ sec. cor. of secs. 24 and 25, monumented, with a sandstone, 20x12x4 ins., firmly set in the ground, and marked ¼ on the N. face., and witnessed by a mound of stone N.

Dependent Resurvey of a portion of the subdivision of T. 1 N., R. 23 E.

CHAINS	
	Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd. T1N R23E ¼ S24 S25 1964 Rebuild the mound of stone N. 3 ft. base, 2½ ft. high. Bury the original stone cor. below the surface of the ground, alongside the iron post.
	N. 89° 53' W., beginning new measurement. Over nearly level bottomland, through dense undergrowth.
22.00	Dry pond, 70 ft. wide, bears N. 3.00 chs. dist.
40.00	The cor. of secs. 23, 24, 25 and 26, monumented with a sandstone 18x10x5 ins. firmly set in the ground, mkd. with 2 notches on the S., 1 notch on the E. face, and witnessed by a mound of stone W. At the cor. point Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd. T1N R23E S23 | S24 S26 | S25 1964 Rebuild the mound of stone, W., 3 ft. base, 2 ft. high. Bury the original stone cor. below the surface of the ground, alongside the iron post. Land, gently rolling bottomland. Soil, gravely clay. No timber. Undergrowth, dense sagebrush and grass.
	S. 0°01" E., between secs. 25 and 26. Over bottomland, through dense undergrowth; asc. 216 ft. over a NW. slope.
33.60	Enter timber; asc. 188 ft. over a NW. slope.
40.00	The ¼ sec. cor. of secs. 25 and 26, monumented with a sandstone, 24x10x8 ins. firmly set in the ground, and mkd. ¼ on the W. face. from which the original bearing trees A pine, 7 ins. in diam., bears N. 67° E., 13 lks. dist., mkd. ¼ S25 BT.

Dependent Resurvey of a portion of the subdivision of T. 1 N., R. 23 E.

CHAINS

A pine, 6 ins. in diam., bears S. 53° W., 48 lks. dist , mkd. ¼ S26 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 8 ins. in the ground, to solid rock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T1N R23E
¼
S26 | S25
1964

Bury the original stone cor. in the mound alongside the iron post.

S. 0° 01' E., beginning new measurement.

Over mountainous land; asc. 530 ft. over a NW. slope.

33.70 Spur, projects SW.; desc. 228 ft. over a SE. slope.

43.14 The closing cor. of secs. 25 and 26, on the N. bdy. of sec. 36, monumented with a sandstone, 24x12x10 ins., fir ly set in a mound of stone, and mkd. CC on the N., 1 groove on the S., and 1 groove on the E. face.

From which the original bearing trees

An aspen, 8 ins. in diam., bears N. 62° E., 76 lks. dist.,mkd. T1N R23E S25 BT.

An aspen, 8 ins. in diam., bears N. 6° 30' W., 69 lks. dist., mkd. T1N R23E S26 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., on solid rock, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T1N R23E
C | C
S26 | S25
S36

1964

Bury the original stone cor. in the mound alongside the iron post.

From the above cor. the cor. of secs. 35 and 36, bears N. 89° 57' W., 8.08 chs. dist.

Land, mountainous.
Soil, rocky clay.
No timber the first 33.60 chs. dense pine, and scattered aspen the balance.
Undergrowth, dense sagebrush and grass, the first 33.60 chs., scattered the balance.

Dependent Resurvey of a portion of the subdivision of T. 1 N., R. 23 E.

CHAINS	
	From the cor. of secs. 23, 24, 25 and 26.
	North between secs. 23 and 24.
	Over rolling bottomland, through dense undergrowth.
2.60	Jeep road, in bottom of swale, swale drains SW., road bears N. 80° E. and SW.
19.84	Fence, bears N. 60° E., and S. 60° W.
40.08	The ¼ sec. cor. of secs. 23 and 24, monumented with a sandstone, 22x8x6 ins. firmly set in the ground, and mkd. ¼ on the W. face.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.
	T1N R23E ¼ S23 | S24 1964
	Raise a mound of stone, 3 ft. base, 2 ft. high, W. of the cor.
	Bury the original stone cor. below the surface of the ground, alongside the iron post.
	N. 0° 01' E., beginning new measurement.
	Over nearly level land, through dense undergrowth.
25.40	Improved dirt road, from Vernal, Utah, to the Little Hole crossing of the Green River, bears NE. and SW.
40.09	The cor. of secs. 13, 14, 23 and 24, monumented with a sandstone, 18x10x4 ins. firmly set in the ground, and mkd. with 3 notches on the S. and 1 notch on the E. edges, and witnessed by a mound of stone W.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.
	T1N R23E S14 | S13 S23 | S24 1964
	Rebuild the mound of stone W., 3 ft. base, 2 ft. high.
	Bury the original stone cor. below the surface of the ground, alongside the iron post.

Dependent Resurvey of a portion of the subdivision of T. 1 N. R. 23 E.

CHAINS

Land, gently rolling bottomland.
Soil, sandy clay.
No timber.
Undergrowth, dense sagebrush and grass.

From the cor. of secs. 13, 18, 19 and 24, on the E. bdy. of the Tp. monumented with an iron post, 2½ ins. in diam, set and mkd., as described in the 1964 resurvey record of T. 1 N., R. 24 E.

N. 89° 55' W., between secs. 13 and 24.

Over mountainous land, through dense timber; desc. 20 ft. along a NW. slope.

5.00 Spur ridge, projects N. 85° W.; desc. 285 ft. along a S. slope, through scattered timber and dense undergrowth.

25.00 Swale, drains SW.; asc. 50 ft. along a S. slope.

40.08 The ¼ sec. cor. of secs. 13 and 24, monumented with a stationary sandstone boulder, 5x3x1 ft. above ground, and mkd. with an x (cross) on top and ¼ on the N. face.

At the cor. point

Over the x (cross), set an iron post, 30 ins. long, 2½ ins. in diam., in a mound of stone, 3½ ft. base to top, with brass cap mkd.

T1N R23E
¼ S13
S24

1964

Rebuild the mound of stone N., 3 ft. base 2½ ft. high.

N. 89° 51' W., beginning new measurement.

Over mountainous land; desc. 15 ft. along a S. slope.

3.00 Slope changes to W.; desc. 490 ft. into Jackson Draw.

21.10 Jeep road, bears N. and S.

21.50 Hollow, drains N.; asc. 26 ft. over a gentle E. slope.

30.00 Top of rise; thence over nearly level land.

34.30 Improved dirt road, Vernal, Utah, to the Little Hole crossing of the Green River, bears N. and S.

40.36 The cor. of secs. 13, 14, 23 and 24.

Land, mountainous and rolling.
Soil, rocky clay.
Timber, dense aspen the first 5.00 chs., scattered pine for 25.00 chs., none the balance.
Undergrowth, dense sagebrush, service berry and grass.

CHAINS	
	North, between secs. 13 and 14.
	Over rolling land, through dense undergrowth; desc. 25 ft.
20.00	Fence, bears E. and W.; desc. 22 ft. over gentle N. slope.
32.00	Dry bed of Jackson Creek, 4 ft. deep, 10 lks. wide, drains N. 10° E.
40.02	The ¼ sec. cor. of secs. 13 and 14, monumented with a sandstone, 16x8x6 ins., firmly set in the ground, and mkd. ¼ on the W. face and witnessed by a mound of stone W.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.
	T1N R23E ¼ S14 | S13 1964
	Rebuild the mound of stone W. 3 ft. base, 2 ft. high.
	Bury the original stone cor. below the surface of the ground, alongside the iron post.
	N. 0° 03' E., beginning new measurement.
	Over nearly level land, through dense undergrowth.
40.00	The cor. of secs. 11, 12, 13 and 14, monumented with a sandstone, 14x10x4 ins., firmly set in the ground, mkd. with 4 notches on the S., 1 notch on the E. edges, and witnessed by a mound of stone W.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. in diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.
	T1N R23E S11 | S12 S14 | S13 1964
	Rebuild the mound of stone, W., 3 ft. base, 2½ ft. high.
	Bury the original stone cor. below the surface of the ground, alongside the iron post.
	Land, gently rolling mountainous. Soil, sandy clay, loam. No timber. Undergrowth, dense sagebrush and grass.

Dependent Resurvey of a portion of the Subdivision of T. 1 N., R. 23 E.

CHAINS	
	From the cor. of secs. 7, 12, 13 and 18, on the E. bdy. of the Tp., monumented with an iron post, 2½ ins. in diam., set and marked as described in the 1964 resurvey record of T. 1 N., R. 24 E.
	N. 89° 46' W., between secs. 12 and 13.
	Over mountainous land, through dense undergrowth, and scattered mahogany the first 3.00 chs.; desc. 735 ft. over a W. slope.
37.00	Dry bed of Jackson Creek, 4 ft. deep, 12 lks. wide, drains irregularly N.
39.56	The ¼ sec. cor. of secs. 12 and 13, monumented with a sandstone, 16x8x6 ins. firmly set in the ground, mkd. ¼ on the N. face, and witnessed by a mound of stone N.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.
	T1N R23E ¼ S12 / S13 1964
	Rebuild the mound of stone N., 3 ft. base, 2 ft. high.
	Bury the original stone cor. below the surface of the ground, alongside the iron post.
	N. 89° 54' W., beginning new measurement.
	Over canyon bottomland, through dense undergrowth; asc. 86 ft. over a gentle E. slope.
17.90	Jeep road, bears NE. and SW.; asc. 21 ft. over an E. slope.
26.50	Improved dirt road, Vernal, Utah, to the Little Hole crossing of the Green River, bears irregularly N. and S.
28.90	Jeep road, bears NE. and SW.
39.99	The cor. of secs. 11, 12, 13 and 14.
	Land, mountainous, and canyon bottom. Soil, rocky clay, loam. No timber. Undergrowth, dense sagebrush and grass, scattered mahogany the first 3.00 chs.
	N. 0° 01' E., between secs. 11 and 12.
	Over rolling mountainous land, through dense undergrowth; asc. 134 ft. over a gentle SE. slope.

Dependent Resurvey of a portion of the subdivision of T. 1 N., R. 23 E.

CHAINS	
23.90	Spur, projects S. 80° E.; thence along E. slope.
27.80	Enter rock slide.
38.00	Leave rock slide, enter scattered aspen timber.
40.13	The ¼ sec. cor. of secs. 11 and 12, monumented with a sandstone, 24x14x3 ins., set in a mound of stone, and mkd. ¼ on the W. face. There is no remaining evidence of the original bearing tree. At the cor. point Set an iron post, 30 ins. long, 2½ ins. in diam., 6 ins. in the ground, to solid rock, and in a mound of stone, 4 ft. base, to top, with brass cap mkd. T1N R23E ¼ S11 | S12 1964 Bury the original stone cor. in the mound, alongside the iron post.
	N. 0° 05' W., beginning new measurement. Over mountainous land, through scattered timber, and dense undergrowth; desc. 122 ft. along a N. slope.
17.00	Swale, drains E.; asc. 46 ft. along an E. slope.
40.09	The cor. of secs. 1, 2, 11 and 12, monumented with a sandstone, 18x6x6 ins., firmly set in the ground, and mkd. with 5 notches on the S., 1 notch on the E. edge, and witnessed by a mound of stone W. At the cor. point Set an iron post, 30 ins. long, 2½ ins. in diam., 10 ins. in the ground, to solid rock, and in a mound of stone, 5 ft. base to top, with brass cap mkd. T1N R23E S2 | S1 S11 | S12 1964 Bury the original stone cor. in the mound, alongside the iron post. Land, mountainous. Soil, rocky clay. Timber, widely scattered pine and aspen. Undergrowth, dense sagebrush, scattered grass.
	From the cor. of secs. 1, 6, 7 and 12, on the E. bdy. of the Tp., monumented with an iron post, 2½ ins. in diam., as described in the 1964 resurvey record of T. 1 N., R. 24 E.

Dependent Resurvey of a portion of the subdivision of T. 1 N., R. 23 E.

CHAINS	
	S. 89° 43' W., between secs. 1 and 12.
	Over mountainous canyon bottomland, through dense undergrowth.
6.50	Dry bed of Jackson Creek, 2 ft. deep, 7 lks. wide, drains irregularly N.
10.10	Jeep road, bears NE. and SW.
24.10	Net wire fence, bears NW. and SE.
24.90	Jeep road, bears NW. and SE.
34.80	Wash, 1 ft. deep, 6 lks. wide, drains N.
39.17	The ¼ sec. cor. of secs. 1 and 12, monumented with a sandstone 16x9x6 ins. firmly set in the ground, mkd. ¼ on the N. face and witnessed by a mound of stone N.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.
	T1N R23E ¼ S1/S12
	1964
	Rebuild the mound of stone N. 3 ft base 2 ft. high.
	Bury the original stone cor. below the surface of the ground, alongside the iron post.
	S. 89° 54' W., beginning new measurement.
	Over rolling bottomland.
4.70	Improved dirt road, Vernal, Utah, to the Little Hole crossing of the Green River, bears NE. and SW.
14.10	Jeep road, bears NW. and SE.
19.50	Base of hill; asc. 190 ft. over an E. slope.
27.00	Enter timber, bears N. and S., asc. 45 ft. over an E. slope.
30.00	Timber becomes widely scattered, asc. 65 ft. over an E. slope.
40.10	The cor. of secs. 1, 2, 11 and 12.
	Land, rolling mountainous. Soil, rocky clay. Timber, patches of aspen and pine, the last 13.00 chs. Undergrowth, dense sagebrush and grass.

Dependent Resurvey of a portion of the subdivision of T. 1 N., R. 23 E.

CHAINS	
	N. 0° 03' E., between secs. 1 and 2.
	Over mountainous land, through dense undergrowth.
5.00	Enter dense timber; desc. 360 ft. over a NE. slope.
37.00	Leave timber; desc. 40 ft. over a NE. slope.
40.00	The ¼ sec. cor. of secs. 1 and 2, monumented with a sandstone, 18x10x6 ins. firmly set in the ground, mkd. ¼ on the W. face, and witnessed by a mound of stone W.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. in diam., 6 ins. in the ground, to solid rock, and in a mound of stone, 3½ ft. base to top, with brass cap mkd.
	T1N R23E ¼ S2 | S1 1964
	Bury the original stone cor. in the mound alongside the iron post.
	N. 0° 05' E., beginning new measurement.
	Over mountainous land, through dense undergrowth.
3.00	Trail, bears E. and W.
5.50	Enter timber; desc. 150 ft. over a N. slope.
16.20	Jackson Creek, 3 ins. deep, 2 lks. wide, flows NW.; asc. 300 ft. over a broken S. slope, through scattered timber and dense undergrowth.
32.80	Spur, projects SW.; asc. 160 ft. along a W. slope.
40.52	The closing cor. of secs. 1 and 2, on the N. bdy. of the Tp. monumented with a sandstone, 24x12x6 ins. firmly set in the ground, and mkd. with 1 groove on the E., 5 grooves on the W., and CC on the S. face, and witnessed by a mound of stone S.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. in diam., 4 ins. in the ground, to solid rock, and in a mound of stone 3½ ft. base to top, with brass cap mkd.
	S36 S2 | S1 C | C T1N R23E 1964
	Deposit the original cor. in the mound alongside the iron post.

Dependent Resurvey of a portion of the subdivision of T. 1 N., R. 23 E.

CHAINS

From the above closing cor., the cor. of secs. 35 and 36, T. 2 N., R. 23 E., monumented by an iron post, 2½ ins. in diam., as described in the 1964 resurvey record of the S. bdy. of T. 2 N., R. 23 E., bears West, 1.27 chs. dist.

Land, mountainous.
Soil, rocky clay.
Timber, patches of dense pine and aspen.
Undergrowth, medium dense sagebrush, service berry and grass.

The point for the N. ¼ sec. cor. of sec. 1, on the N. bdy. of the Tp is at proportionate distance, between the closing cor. of secs. 1 and 2, and the NE. cor. of the Tp.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 6 ins. in the ground, to solid rock, and in a mound of stone, 3½ ft. base to top, with brass cap mkd.

¼ S1
T1N R23E

1964

From the above cor. the ¼ sec. cor. of sec. 36, T. 2 N., R. 23 E., monumented by an iron post, 2½ ins. in diam., as described in the 1964 resurvey record of the S. bdy. of T. 2 N., R. 23 E., bears S. 89° 55' W., 1.29 chs. dist.

Reestablishment of the survey executed by A. D. Ferron, in 1879, and retraced by S. P. and J. R. Stewart, in 1906.

From the standard cor. of secs. 34 and 35, on the S. bdy. of the Tp.

N. 0° 34' W., between secs. 34 and 35.

Over nearly level mountain canyon bottomland; through dense undergrowth.

29.90 Old high water mark, of Calders Pond; asc. 50 ft. over a gentle E. slope.

39.80 Jeep road, bears N. 70° W., and S. 70° E.

39.97 Fence, bears E., and W., 17 lks., then N. 70° W.

40.81 The ¼ sec. cor. of secs. 34 and 35, monumented with a sandstone, 14x8x3 ins. firmly set in the ground, and mkd. ¼ on the W. face.

Dependent Resurvey of a portion of the subdivision of T. 1 N., R. 23 E.

CHAINS	
	At the cor. point Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd. T1N R23E ¼ S34 | S35 1964 Raise a mound of stone 2½ ft. base, 2 ft. high, W. of the cor. Bury the original stone cor. below the surface of the ground, alongside the iron post.
	N. 0° 51' W., beginning new measurement. Over nearly level bottomland, through dense undergrowth.
20.40	Improved dirt road, Vernal, Utah, to the Little Hole crossing of the Green River, bears NE. and SW.
40.42	The cor. of secs. 34 and 35, on the S. bdy. of Sec. 27, monumented with a sandstone, 18x10x10 ins. firmly set in the ground, and mkd. with 1 notch on the S., and 2 notches on the E. edge. At the cor. point Set an iron post, 30 ins. long, 2½ ins. in diam., 20 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd. T1N R23E S27 S34 | S35 1964 Bury the original stone cor. below the surface of the ground, alongside the iron post. Land, gently rolling bottomland. Soil, sandy clay. No timber. Undergrowth, scattered sagebrush, dense grass.
	From the cor. of secs. 35 and 36, on the S. bdy. of sec. 26. S. 88° 38' W., along the N. bdy. of sec. 35. Over mountainous land, through dense timber; desc. 580 ft. over a W. slope.
21.80	Leave timber, enter dense sagebrush; desc. 132 ft. over a W. slope.

Dependent Resurvey of a portion of the subdivision of T. 1 N., R. 23 E.

CHAINS	
32.03	Point for the S. ¼ sec. cor. of sec. 26, at midpoint between closing cors. Set an iron post, 30 ins. long, 2½ ins. in diam., 18 ins in the ground, to solid rock, and in a mound of stone, 3 ft. base to top, with brass cap mkd. T1N R23E ¼ S26 1964 Desc. 63 ft. over a W. slope.
40.05	The ¼ sec. cor. originally set for secs. 26 and 35, now functions for sec. 35 only, monumented with a sandstone, 18x10x5 ins. firmly set in the ground, and mkd. ¼ on the N. face. At the cor. point Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd. T1N R23E ¼ S35 1964 Raise a mound of stone, 4 ft. base 3 ft. high, N. of the cor. Bury the original stone cor. below the surface of the ground, alongside the iron post.
	S. 89° 56' W., beginning new measurement. Over gently rolling canyon bottom land, through dense sagebrush; desc. 25 ft. over W. slope.
6.50	Jeep road, bears irregularly N. and S.
20.00	Improved dirt road, Vernal, Utah, to the Little Hole crossing of the Green River, bears NE. and SW.
32.08	The closing cor. of secs. 26 and 27 hereinafter described.
40.33	The cor. of secs. 34 and 35, on S. bdy. of sec. 27. Land, mountainous the first ½ mile, rolling the balance. Soil, rocky clay. Timber, dense pine and scattered aspen, the first 22.00 chs. no timber the balance. Undergrowth, scattered sagebrush and service berry, the first 22.00 chs. dense sagebrush and grass the balance.

Dependent Resurvey of a portion of the subdivision of T. 1 N., R. 23 E.

CHAINS	
	Reestablishment of the survey executed by S. P. and J. R. Stewart, in 1906
	From the cor. of secs. 23, 24, 25 and 26.
	West, between secs. 23 and 26.
	Over gently rolling, canyon bottomland, through dense undergrowth.
5.10	Jeep road, bears NE. and SW., in bottom of a swale draining SW.
10.10	Jeep road, bears NE. and SW.
20.15	Cor. of fences, bearing N., S., and W.; thence along fence.
26.45	Improved dirt road, Vernal, Utah, to the Little Hole crossing of the Green River, bears irregularly N. and S.
29.85	Board fence on E. side of corral, bears S. about 2.00 chs.; thence W.
31.25	Board fence on W. side of corral, bears S. about 2.00 chs.; thence E.
40.04	The ¼ sec. cor. of secs. 23 and 26, monumented with a sandstone, 18x10x8 ins. firmly set in the ground, and mkd. ¼ on the N. face.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.
	T1N R23E ¼ S 23 / S 26 1964
	Bury the original stone cor. below the surface of the ground, alongside the iron post.
	The above cor. is situated in an E. and W. fence line.
	N. 89° 58' W., beginning new measurement.
	Over rolling canyon bottomland, through dense undergrowth, along S. side of fence.
.67	Pond, 70 ft. wide, bears N. about 7.00 chs. dist.
1.10	Flat draw, in head of Jackson Reef, 10 lks. wide, 1 ft. deep, drains N.
1.50	Pond, 70 ft. wide, bears S. about 7.00 chs. dist.; asc. 75 ft. over an E. slope.
18.47	Spring branch, 4 ins. deep, 2 lks. wide, flows SE. into pond.
19.66	Fall 10 lks. S. of cor. of fences bearing E., NE., and SW.

Dependent resurvey of a portion of the subdivision of T. 1 N., R. 23 E.

CHAINS	
20.80	Jeep road, bears NW. and SE., old cabin, bears NW. about 5.00 chs. dist.; asc. 45 ft. over an E. slope.
28.00	Spring, of clear water, bears N. 6 chs. dist.; asc. 140 ft. over an E. slope.
40.10	The cor. of secs. 22, 23, 26 and 27, monumented with a sandstone, 20x10x5 ins. firmly set in the ground, and mkd. with 2 notches on the S. and E. edges; and witnessed by a mound of stone, W. At the cor. point Set an iron post, 30 ins. long, 2½ ins. in diam., 6 ins. in the ground, to solid rock, and in a mound of stone, 3½ ft. base, to top, with brass cap mkd. T1N R23E S22 | S23 S27 | S26 1964 Bury the original stone cor. in the mound, alongside the iron post. Land, mountainous canyon bottom and bench land. Soil, rocky, sandy clay. No timber. Undergrowth, dense sagebrush and grass.
	S. 0° 01' W., between secs. 26 and 27. Over rolling canyon bottomland, through dense undergrowth; asc. 17 ft. over a gentle E. slope.
11.00	Top of small rise; desc. 146 ft. along an E. slope.
40.14	The ¼ sec. cor. of secs. 26 and 27, monumented with a sandstone 18x10x8 ins. firmly set in the ground, and mkd. ¼ on the W. face, and witnessed by a mound of stone W. At the cor. point Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd. T1N R23E ¼ S27 | S26 1964 Rebuild the mound of stone W., 3½ ft. base, 3 ft. high. Bury the original stone cor. below the surface of the ground, alongside the iron post.

South, beginning new measurement.

Dependent Resurvey of a portion of the subdivision of T. 1 N., R. 23 E.

CHAINS	
	Over rolling canyon bottomland; desc. 35 ft. along a gentle E. slope.
16.00	Dirt road, bears NE. and SW.
28.00	Travelers Draw, drains NE.; asc. 40 ft. along E. slope.
43.83	The closing cor. of secs. 26 and 27, on the N. bdy. of sec. 35, monumented with a sandstone, 12x12x10 ins. firmly set in the ground, and mkd. CC on the N., 2 grooves on the E., and 1 groove on the S. faces and witnessed by a mound of stone N. At the cor. point Set an iron post, 30 ins. long, 2½ ins. in diam., 22 ins. in the ground, and in a collar of stone, with brass cap mkd. T1N R23E C C S27 | S26 S35 1964 Rebuild the mound of stone N. 3½ ft. base 2 ft. high. Bury the original stone cor. below the surface of the ground, alongside the iron post. From the above cor. the cor. of secs. 34 and 35, hereinbefore described, bears S. 89° 56' W., 8.25 chs. dist. Land, mountainous canyon bottom. Soil, sandy clay. No timber. Undergrowth, dense sagebrush and grass.
	From the cor. of secs. 22, 23, 26 and 27. N. 0° 04' W., between secs. 22 and 23. Over mountainous land, through dense undergrowth; 50 ft. along an E. slope.
11.40	Hollow, drains SE., jeep road in bottom bears SE. and NW.; asc. 437 ft. over a SE. slope.
30.00	Spur, projects E.; enter dense timber; desc. 285 ft. over a N. slope.
40.01	The ¼ sec. cor. of secs. 22 and 23, monumented with a sandstone 20x10x3 ins. firmly set in the ground, and mkd. ¼ on the W. face. From which the original bearing trees. A pine, 14 ins. in diam., bears N. 21° 30' E., 87 lks. dist., mkd. ¼ S23 BT. A dead aspen, 5 ins. in diam., bears S. 78° 30' W., 28 lks. dist., mkd. ¼ S22 BT.

Dependent Resurvey of a portion of the subdivision of
E

CHAINS

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 6 ins. in the ground, to solid rock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T1N R23E
S22|S23

1964

Bury the original stone cor. in the mound, alongside the iron post.

N. 0° 05' E., beginning new measurement.

Over mountainous land, through dense timber; desc. 280 ft. over a NE. slope.

10.00 Hollow, drains E.; asc. 50 ft. over a SE. slope.

13.00 Leave timber; asc. 240 ft. over a SE. slope.

28.80 Spur, projects E.; enter timber; desc. 255 ft. over a NE. slope.

40.11 The cor. of secs. 14, 15, 22 and 23, monumented with a sandstone 16x12x5 ins. firmly set in the ground, and mkd. with 2 notches on the E., and 3 notches on the S. edges, and witnessed by a mound of stone W.

From which the remaining original bearing trees.

An aspen 5 ins. in diam., bears N. 57° 30' E., 75 lks. dist., mkd. T1N R23E S14 BT.

An aspen 5 ins. in diam., bears S. 65° 15' E., 34 lks. dist., mkd. T1N R23E S23 BT.

The pine, bearing tree is dead and fallen.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 6 ins. in the ground, to solid rock, and in a mound of stone, 3½ ft. base to top, with brass cap mkd.

T1N R23E
S15|S14
S22|S23

1964

Bury the original stone cor. in the mound, alongside the iron post.

Land, mountainous.
Soil, rocky clay.
Timber, patches of dense pine and aspen.
Undergrowth, dense sagebrush in the openings in the timber, scattered grass and service berry.

CHAINS	
	From the cor. of secs. 13, 14, 23 and 24.
	S. 89° 55' W., between secs. 14 and 23.
	Over mountainous canyon bottomland; desc. 30 ft. over a W. slope.
14.90	Dry bed of Jackson Creek, drains NE.
18.70	Pond, dry, bears S. 10.00 chs. dist.; asc. 140 ft. over a SE. slope.
37.00	Spur, projects S.; desc. 10 ft. over a SW. slope.
40.09	The ¼ sec. cor., of sec. 14 and 23, monumented with a sandstone 18x10x8 ins., firmly set in the ground, and mkd. ¼ on the N. face, and witnessed by a mound of stone N.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. in diam., 6 ins. in the ground, to solid rock, and in a mound of stone, 3½ ft. base to top, with brass cap mkd.
	T1N R23E ¼ S14 / S23 1964
	Bury the original stone cor. in the mound, alongside the iron post.
	S. 89° 56' W., beginning new measurement.
	Over mountainous canyon bottomland, through dense undergrowth; desc. 75 ft. over a SW. slope.
9.60	Jeep road, in bottom of hollow draining SE., bears SE. and NW.; asc. 255 ft. over a NE. slope.
35.70	Enter dense timber, bears N. and S.; asc. 50 ft. over a NE. slope.
40.07	The cor. of secs. 14, 15, 22 and 23.
	Land, mountainous. Soil, rocky, sandy clay. Timber, patches of dense aspen and pine. Undergrowth, dense sagebrush and grass in the open parts.
	North, between secs. 14 and 15.
	Over mountainous land, through dense timber; desc. 90 ft. over a NE. slope.
15.20	Draw, drains E., spring bears E., 2.43 chs. dist., drains E. into small pond, 3.72 chs. dist.; asc. 290 ft. over a S. slope.

Dependent Resurvey of a portion of the subdivision of T. 1 N., R. 23 E.

CHAINS	
30.00	Spur, projects SE.; 160 ft. along an E. slope.
39.98	Point for the ¼ sec. cor. of sec. 14 and 15, at proportionate dist., there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. in diam., 12 ins. in the ground, to solid rock, and in a mound of stone, 3 ft. base to top, with brass cap mkd. T1N R23E ¼ S15 | S14 1964 Asc. 220 ft. over a SE. slope.
59.97	Point for the N. 1/16 sec. cor. of secs. 14 and 15, at proportionate distance. Set an iron post, 30 ins. long, 2½ ins. in diam., 6 ins. in the ground, to solid rock, and in a mound of stone, 4 ft. base to top, with brass cap mkd. N1/16 S15 | S14 1964 Asc. 400 ft. over a SE. slope.
79.96	The cor. of secs. 10, 11, 14 and 15, monumented with a sandstone, 18x8x6 ins. firmly set in the ground, and mkd. with 4 notches on the S. and 2 notches on the E. edges. From which an original bearing tree. A pine, 12 ins. in diam., bears N. 41° 30' W., 10 lks. dist., mkd. T1N R23E S10 BT. The other bearing trees are dead and fallen. At the cor. point Set an iron post, 30 ins. long, 2½ ins. in diam., 8 ins. in the ground, to solid rock, and in a mound of stone 3 ft. base to top, with brass cap mkd. T1N R23E S10 | S11 S15 | S14 1964 Bury the original stone cor. in the mound, alongside the iron post. Land, mountainous. Soil, rocky clay. Timber, dense to scattered pine and aspen. Undergrowth, scattered sagebrush and grass medium dense service berry and buck brush.

CHAINS	
	From the cor. of secs. 11, 12, 13 and 14.
	N. 89° 50' W., between secs. 11 and 14.
	Over mountainous land, through dense undergrowth; asc. 150 ft. over an E. slope.
23.00	Enter dense timber; asc. 490 ft. over an E. slope.
40.04	The ¼ sec. cor. of secs. 11 and 14, monumented with a sandstone, 18x14x6 ins. firmly set in the ground, and mkd. ¼ on the N. face.
	From which the original bearing trees, in good condition
	A pine, 24 ins. in diam., bears N. 44° E., 49 lks. dist., mkd. ¼S11 BT.
	A pine, 18 ins. in diam., bears S. 29° W., 1.41 chs. dist., mkd. ¼S14 BT.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. in diam., 5 ins. in the ground, to solid rock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.
	T1N R23E ¼S 11 ¼S 14 1964
	Bury the original stone cor. below the surface of the ground, alongside the iron post.
	S. 89° 23' W., beginning new measurement.
	Over mountainous land, through dense timber; asc. 550 ft. over a broken E. slope.
24.90	Spur, projects SE.; asc. 156 ft. along a SE. slope.
40.13	The cor. of secs. 10, 11, 14 and 15.
	Land, mountainous. Soil, rocky clay. Timber, dense aspen and pine, the last 57.00 chs. Undergrowth, dense sagebrush and grass, the first 23.00 chs., medium sagebrush, service berry and grass the balance.
	N. 0° 04' W., between secs. 10 and 11.
	Over mountainous land, through dense timber, and scattered undergrowth; asc. 115 ft. over a SE. slope.
6.00	Top of divide ridge between Jackson Creek and Lansens Draw; bears N. 10° E., and S. 10° W.; desc. 325 ft. along a NW. slope.

Dependent resurvey of a portion of the subdivision of T. 1 N., R. 23 E.

CHAINS

29.00 Hollow, drains W.; asc. 133 ft. over a SW. slope.

39.88 The ¼ sec. cor. of secs. 10 and 11, monumented with a sandstone, 20x8x5 ins. firmly set in the ground, and mkd. ¼ on the W. face.

From which the original bearing trees.

A pine, 8 ins. in diam., bears S. 84° 15' E., 1.00 ch. dist., mkd. ¼ S11 BT.

A pine, 8 ins. in diam., bears N. 80° W., 1.70 chs. dist., mkd. ¼ S10 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 6 ins. in the ground, to solid rock, and in a mound of stone, 3½ ft. base to top, with brass cap mkd.

T1N R23E
¼
S10 | S11

1964

Bury the original stone cor. in the mound alongside the iron post.

N. 0° 06' W., beginning new measurement.

Over mountainous land, through dense timber; asc. 230 ft. over a SW. slope.

18.00 Top of divide ridge, between Jackson Creek and Lansens Draw, bears NW. and SE.; desc. 285 ft. over a NE. slope.

39.84 The cor. of secs. 2, 3, 10 and 11, monumented with a sandstone, 18x12x8 ins. firmly set in the ground, and mkd., with 5 notches on S. and 2 notches on the E. edges.

The original bearing trees are dead and fallen.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 8 ins. in the ground, to solid rock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T1N R23E
S3 | S2
S10 | S11

1964

Bury the original stone cor. in the mound, alongside the iron post.

Land, mountainous.
Soil, rocky clay.
Timber, pine and aspen.
Undergrowth, service berry, wild apple and buck brush.

Dependent Resurvey of a portion of the subdivision of T. 1 N., R. 23 E.

CHAINS	
	From the cor. of secs. 1, 2, 11 and 12.
	S. 89° 55' W., between secs. 2 and 11.
	Over mountainous land, through dense undergrowth; asc. 200 ft. over a NE. slope.
15.00	Enter dense timber, bears N. and S.; asc. 600 ft. over a NE. slope.
35.72	The ¼ sec. cor. of secs. 2 and 11, monumented with a sandstone, 20x10x8 ins. firmly set in the ground, and mkd. ¼ on the N. face.
	From which the original bearing trees,
	A pine, 20 ins. in diam., bears S. 57° 30' E., 60 lks. dist., mkd. ¼ S11 BT.
	A pine, 18 ins. in diam., bears N. 5° 30' W., 37 lks. dist., mkd. ¼ S2 BT.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. in diam., 6 ins. in the ground, to solid rock and in a mound of stone, 3½ ft. base to top, with brass cap mkd.
	T1N R23E ¼ S 2 / S11 1964
	Bury the original stone cor. in the mound, alongside the iron post.
	S. 89° 09' W., beginning new measurement.
	Over mountainous land, through dense timber; asc. 40 ft. over a NE. slope.
4.00	Spur ridge, projects NE.; desc. 100 ft. over a NW. slope.
12.00	Hollow, drains N.; asc. 500 ft. over a NE. slope.
44.74	The cor. of secs. 2, 3, 10 and 11.
	Land, mountainous. Soil, rocky clay. Timber, dense pine, spruce and aspen, the last 66.00 chs Undergrowth, dense sagebrush, the first 15.00 chs., scattered service berry, buckbrush and wild apple, the balance.
	N. 0° 20' W., between secs. 2 and 3.
	Over mountainous land, through second growth timber and dense undergrowth; desc. 460 ft. over a NE. slope.

343

Dependent resurvey of a portion of the subdivision of T. 1 N., R. 23 E.

CHAINS

26.00 Leave second growth timber, enter dense timber; desc. 380 ft. over a NE. slope.

40.75 The ¼ sec. cor. of secs. 2 and 3, monumented with a sandstone, 30x10x4 ins., firmly set in the ground, and mkd. ¼ on the W. face.

From which an original bearing tree,

A pine, 15 ins. in diam., bears S. 33° 30' E., 45 lks. dist., mkd. ¼ S2 BT.

The SW. bearing tree is dead and fallen.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 8 ins. in the ground, to solid rock, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.

T1N R23E
¼
S3 | S2

1964

Bury the original stone cor. in the mound, alongside the iron post.

N. 0° 03' E., beginning new measurement.

Over mountainous land, through dense and second growth timber; desc. 545 ft. over a NE. slope.

40.58 The closing cor. of secs. 2 and 3, on the N. bdy. of the Tp., monumented with a sandstone, 18x14x4 ins. firmly set in the ground, and mkd. CC on the S., 2 grooves on the E. and 4 grooves on the W. faces.

From which an original bearing tree,

A pine 12 ins. in diam., bears S. 42° 30' W., 22 lks. dist., mkd. T1N R23E S3 BT (record dist. 93 lks.)

The aspen bearing tree is dead and fallen.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 6 ins. in the ground, to solid rock, and in a mound of stone, 3½ ft. base, to top, with brass cap mkd.

S 35
S 3 | S2
C | C
T1N R23E

1964

Bury the original stone cor. in the mound alongside the iron post.

Dependent Resurvey of a portion of the subdivision of T. 1 N., R. 23 E.

CHAINS

From the above cor. the cor. of secs. 34 and 35, T. 2 N., R. 23 E., monumented by an iron post, 2½ ins. in diam., set and marked as described in the 1964 resurvey record of the S. bdy. of T. 2 N., R. 23 E., bears N. 89° 53' W., 1.20 chs. dist.

Land, mountainous.
Soil, rocky clay.
Timber, dense pine and aspen.
Undergrowth, scattered buckbrush, service berry and wild apple.

The point for the N. ¼ sec. cor. of sec. 2, on the N. bdy. of the Tp. is at midpoint between closing cors.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 10 ins. in the ground, to solid rock, and in a mound of stone, 3½ ft. base, to top, with brass cap mkd.

¼ S2
T1N R23E

1964

From the above cor. the ¼ sec. cor. of sec. 35, T. 2 N., R. 23 E., monumented by an iron post, 2½ ins. in diam., as described in the 1964 resurvey record of the S. bdy. of T. 2 N., R. 23 E., bears S. 89° 51' W., 1.265 chs. dist.

The closing cor. of secs. 3 and 4, on N. bdy., T. 1 N., R. 23 E., monumented with a sandstone, 20x10x6 ins. firmly set in the ground, and mkd. CC on the S., 3 grooves on the E. and W. faces.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 6 ins. in the ground, to solid rock, and in a mound of stone, 3½ ft. base to top, with brass cap mkd.

S34
S4 | S3
C | C
T1N R23E

1964

Bury the original stone cor. in the mound alongside the iron post.

From the above cor. the cor. of secs. 33 and 34 on S. bdy., T. 2 N., R. 23 E., monumented by an iron post, 2½ ins. in diam., as described in the 1964 resurvey record of the S. bdy. of T. 2 N., R. 23 E., bears S. 89° 55' W., 1.09 chs. dist.

Dependent resurvey of a portion of the subdivision of T. 1 N., R. 23 E.

CHAINS

The point for the N. ¼ sec. cor. of sec. 3, on the N. bdy. of the Tp. is at midpoint between closing cors.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 8 ins. in the ground, to solid rock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

¼ S3
T1N R23E

1964

From the above cor. the ¼ sec. cor. of sec. 34, T. 2 N., R. 23 E., monumented by an iron post, 2½ ins. in diam., as described in the 1964 resurvey record of the S. bdy. of T. 2 N., R. 23 E., bears S. 89° 52' W., 1.6151ks. dist.

The closing cor. of secs. 4 and 5, on N. bdy., T. 1 N., R. 23 E., monumented with a sandstone, 20x14x5 ins., firmly set in the ground, and mkd. CC on the S., 4 groov s on the E., and 2 grooves on the W. faces.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 4 ins. in the ground, to solid rock, and in a mound of stone, 3½ ft. base to top, with brass cap mkd.

S 33
S5 | S4
C | C
T1N R23E

1964

Bury the original stone cor. in the mound alongside the iron post.

From the above cor. the cor. of secs. 32 and 33 on S. bdy., T. 2 N., R. 23 E., monumented by an iron post, 2½ ins. in diam., as described in the 1964 resurvey record of the S. bdy. of T. 2 N., R. 23 E., bears S. 89° 56' W., 99 lks. dist.

The point for the N. ¼ sec. cor. of sec. 4, on the N. bdy. of the Tp. is at midpoint between closing cors.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 12 ins in the ground, to solid rock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

¼ S 4
T1N R23E

1964

From the above cor. the ¼ sec. cor. of sec. 33, T. 2 N.,

Dependent resurvey of a portion of the subdivision of T. 1 N., R. 23 E.

CHAINS	
	R. 23 E., monumented by an iron post, 2½ ins. in diam., as described in the 1964 resurvey record of the S. bdy. of T. 2 N., R. 23 E., bears N. 89° 56' E., 1.135 chs. dist.
	Reestablishment of the survey executed by A. D. Ferron, in 1879, and retraced by S. P. and J. R. Stewart, in 1906.
	From the standard cor. of secs. 33 and 34, on the S. bdy. of the Tp.
	N. 1° 03' W., between secs. 33 and 34.
	Over nearly level mountain canyon bottomland, through dense undergrowth.
39.96	The ¼ sec. cor. of secs. 33 and 34, monumented with a sandstone, 10x8x6 ins. firmly set in the ground, and mkd. ¼ on the W. face.
	At the cor. point.
	Set an iron post, 30 ins. long, 2½ ins. in diam., 20 ins. in the ground, with brass cap mkd. T1N R23E ¼ S33 S34 1964
	Raise a mound of stone, 3 ft. base, 2 ft. high W. of the cor.
	Bury the original stone cor. below the surface of the ground, alongside the iron post.
	N. 0° 38' W., beginning new measurement.
	Over mountainous land, through dense undergrowth; asc. 55 ft. over a S. slope.
7.50	Net wire fence, bears NE. and SW.; asc. 110 ft. over a S. slope.
14.56	Net wire fence, bears NW. and SE.; asc. 40 ft. over a S. slope.
18.00	Top of rise, bears E. and W.; desc. 90 ft. over a N. slope.
28.50	Hollow, drains SW.; asc. 335 ft. over a SE. slope.
40.57	The cor. of secs. 33 and 34, monumented with a stationary quartzite; 20x5x5 ft. above ground, and mkd. with a x (cross) and 3 grooves E. of x and 1 groove S. of x on top of boulder, on the south bdy. of sec. 28.

Dependent resurvey of a portion of the subdivision of T. 1 N. R. 23 E

CHAINS

At the cor. point

Over the x (cross) set an iron post, 30 ins. long, 2½ ins. in diam., in a mound of stone, 4 ft. base to top, with brass cap mkd.

T1N R23E
S 28
S33|S34

1964

The above cor. is set on top of a spur, projecting SE.

Land, nearly level the first ½ mile, mountainous the balance.
Soil, rocky clay loam.
No timber.
Undergrowth, dense sagebrush and grass.

From the cor. of secs. 34 and 35, on S. bdy. of sec. 27.

S. 88° 42' W., along the N. bdy. of sec. 34.

Over gently rolling canyon bottomland, through dense undergrowth.

3.10 Jeep road, bears N. and S.

10.80 Wash, drains NE.

25.00 Draw, drains NE.; asc. 25 ft. over an E. slope.

28.00 Jeep road, bears NW. and SE.; asc. 25 ft. over an E. slope.

31.80 Point for the ¼ sec. cor. of sec. 27, at midpoint between closing cors.

Set an iron post, 30 ins. long, 2½ ins. in diam., 20 ins. in the ground, with brass cap mkd.

T1N R23E
¼ S27

1964

Raise a mound of stone, 3 ft. base, 2½ ft. high, N. of the cor.

Asc. 20 ft. over an E. slope.

35.50 Enter dense timber; asc. 30 ft. over an E. slope.

40.33 The ¼ sec. cor. originally set for secs. 27 and 34, now functions for sec. 34 only, monumented with a sandstone, 10x6x5 ins. firmly set in the ground, and mkd. ¼ on the N. face.

At the cor. point

Dependent resurvey of a portion of the subdivision of T. 1 N., R. 23 E.

CHAINS	
	Set an iron post, 30 ins. long, 2½ ins. in diam., in a rock slide, and in a mound of stone, 5 ft. base to top, with brass cap mkd. T1N R23E ¼ S34 1964 Bury the original stone cor. in the mound, alongside the iron post.
	S. 88° 46' W., beginning new measurement. Over mountainous land, through dense timber; asc. 255 ft. over an E. slope.
24.50	Spur, projects SE.; leave timber; desc. 165 ft. over a SW. slope.
31.52	The closing cor. of secs. 27 and 28, hereinafter described; desc. 35 ft. over a SW. slope.
33.50	Hollow, drains S.; asc. 160 ft. over an E. slope.
40.45	The cor. of secs. 33 and 34. Land, mountainous. Soil, rocky clay. Timber, none the first 35.50 chs. dense to scattered the balance. Undergrowth, dense sagebrush and grass the first 35.50 chs., scattered the balance.
	Reestablishment of the survey executed by S. P. and J. R. Stewart in 1906
	From the cor. of secs. 22, 23, 26 and 27. S. 89° 49' W., between secs. 22 and 27. Over mountainous land, through dense undergrowth; asc. 120 ft. over an E. slope.
20.00	Enter aspen and pine timber; asc. 340 ft. over an E. slope.
40.18	The ¼ sec. cor. of secs. 22 and 27, monumented with a stationary sandstone boulder, 4x3x1 ft. above ground, mkd. with a x (cross) on top and ¼ on the N. face. From which the original bearing trees, An aspen 10 ins. in diam., bears N. 7° 30' E., 64 lks. dist., mkd. ¼ S22 BT. The SE. tree is dead and fallen.

Dependent resurvey of a portion of the subdivision of T. 1 N. R. 23 E.

CHAINS

At the cor. point

Over an x (cross), set an iron post, 30 ins. long, 2½ ins. in diam., in a mound of stone, 4 ft. base to top, with brass cap mkd.

T1N R23E
¼ S22
S27

1964

The above cor. is set in a rockslide, sloping E.

N. 89° 50' W., beginning new measurement.

Over mountainous land, through scattered timber; asc. 290 ft. over an E. slope.

8.40 Spur projects SE.; desc. 45 ft. over a SW. slope.

16.40 Hollow, drains S.; asc. 490 ft. over an E. slope.

39.91 The cor. of secs. 21, 22, 27 and 28, monumented with a sandstone, 16x8x6 ins., firmly set in the ground, and mkd. with 2 notches on the S., and 3 notches on the E. edges.

From which the original bearing trees,

A pine, 8 ins. in diam., bears N. 72° E., 85 lks. dist., mkd. T1N R23E S22 BT.

A pine, 8 ins. in diam., bears S. 1° W., 356 lks. dist., mkd. T1N R23E S28 BT.

A pine, 8 ins. in diam., bears N. 82° W., 355 lks. dist., mkd. T1N R23E S 21 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 6 ins. in the ground, to solid rock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T1N R23E
S21 | S22
S28 | S27

1964

Bury the original stone cor. in the mound, alongside the iron post.

Land, mountainous.
Soil, rocky clay.
Timber, medium dense aspen and pine, the last 60.00 chs.
Undergrowth, dense sagebrush and grass, the first 20.00 chs., scattered the balance.

CHAINS	
	S. 0° 04' E., between secs. 27 and 28.
	Over mountainous land, through dense timber; desc. 20 ft. along an E. slope.
7.50	Head of hollow, drains E.; desc. 570 ft. along an E. slope.
40.15	The ¼ sec. cor. of secs. 27 and 28, monumented with a sandstone, 18x12x8 ins. firmly set in the ground, and mkd. ¼ on the W. face.
	From which an original bearing tree,
	A red pine, 12 ins. in diam., bears S. 70° E., 13 lks. dist., mkd. ¼ S27 BT.
	The SW. tree is dead and fallen.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. in diam., 12 ins. in the ground, to solid rock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.
	T1N R23E ¼ S28 | S27 1964
	Bury the original stone cor. in the mound alongside the iron post.
	S. 0° 06' E., beginning new measurement.
	Over mountainous land, through dense timber; desc. 420 ft. along an E. slope.
18.00	Ridge, bears SE. and NW., timber becomes scattered; desc. 205 ft. over a S. slope.
45.50	The closing cor. of secs. 27 and 28, on N. bdy. of sec. 34, monumented with a sandstone, 18x10x7 ins., firmly set in the ground, and mkd. CC on the N., 1 groove on the S., 3 grooves on the E. edges, and witnessed by a mound of stone N.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. in diam., 8 ins. in the ground, to solid rock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.
	T1N R23E C C S28 | S27 S34 1964

Dependent resurvey of a portion of the subdivision of T. 1 N., R. 23 E.

CHAINS

Rebuild the mound of stone N. 3 ft. base, 2½ ft. high.

Bury the original stone cor. in the mound, alongside the iron post.

From the above cor., the cor. of secs. 33 and 34, hereinbefore described, bears S. 88° 46' W., 8.93 chs. dist.

Land, mountainous.
Soil, rocky clay.
Timber, dense to scattered pine and aspen.
Undergrowth, scattered sagebrush, serviceberry, buckbrush and grass.

From the cor. of secs. 21, 22, 27 and 28.

N. 0° 09' W., between secs. 21 and 22.

Over mountainous land, through scattered timber and dense undergrowth; asc. 40 ft. over a SE. slope.

6.00 Ridge, bears NE. and SW., timber becomes dense; desc. 673 ft. over a N. changing to NW. slope.

39.92 The ¼ sec. cor. of secs. 21 and 22, monumented with a sandstone, 15x13x6 ins. firmly set in the ground, and mkd. ¼ on the W. face.

From which an original bearing tree,

A red pine, 12 ins. in diam., bears S. 37° 45' E., 33 lks. dist., mkd. ¼ S22 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.

T1N R23E
¼
S21 | S22
1964

Bury the original stone cor. below the surface of the ground alongside the iron post.

The above cor. is set in a swale, draining NW.

N. 0° 05' W., beginning new measurement.

Over mountainous land, through dense timber; asc. 225 ft. over a SW. slope.

26.40 Spur, projects NW.; desc. 170 ft. over a NW. slope.

39.93 The cor. of secs. 15, 16, 21 and 22, monumented with a sandstone, 15x8x6 ins. firmly set in the ground, and mkd. with 3 notches on the S. and E. edges.

Dependent resurvey of a portion of the subdivision of T. 1 N., R. 23 E.

CHAINS	
	From which two of the original bearing trees, A pine 24 ins. in diam., bears N. 24° 15' E., 1.20 chs. dist., mkd. T1N R23E S15 BT. A pine, 15 ins. in diam., bears S. 67° 30' E., 34 lks. dist., mkd. T1N R23E S22 BT The SW. and NW. bearing trees are dead and fallen. At the cor. point Set an iron post, 30 ins. long, 2½ ins. in diam., 12 ins. in the ground, to solid rock, and in a mound of stone, 3 ft. base to top, with brass cap mkd. T1N R23E S16 | S15 S21 | S22 1964 Bury the original stone cor. in the mound alongside the iron post. Land, mountainous. Soil, rocky clay. Timber, dense to scattered aspen and pine. Undergrowth, dense to scattered service berry, buck-brush and grass.
	From the cor. of secs. 14, 15, 22 and 23. S. 89° 43' W., between secs. 15 and 22. Over mountainous land, through dense timber; asc. 820 ft. over a broken NE. slope.
37.00	Top of dividing ridge, between Jackson Creek and Lambsons Draw, bears N. and S.; desc. 5 ft. over a NW. slope.
39.95	The ¼ sec. cor. of secs. 15 and 22, monumented by a stationary quartzite boulder, 50x30x20 ins. above ground, and mkd. with a cross (x) on top and ¼ on the N. face. At the cor. point Over the cross (x), set an iron post, 30 ins. long, 2½ ins. in diam., in a mound of stone, 4 ft. base to top, with brass cap mkd. T1N R23E ¼ S15 S22 1964
	S. 89° 46' W., beginning new measurement.

Dependent resurvey of a portion of the subdivision of T. 1 N., R. 23 E.

CHAINS

Over mountainous land, through dense timber, desc. 410 ft. over a NW. slope.

26.00 Hollow, drains N.; asc. 75 ft. over a NE. slope.

37.90 Spur, projects N.; desc. 15 ft. over a NW. slope.

40.14 The cor. of secs. 15, 16, 21 and 22.

Land, mountainous.
Soil, rocky clay.
Timber, dense pine and aspen.
Undergrowth, scattered buckbrush, service berry, wild apple and grass.

N. 0° 09' W., between secs. 15 and 16.

Over mountainous land, through dense timber; desc. 460 ft. over a NW. slope.

36.00 Leave timber, enter grassy canyon bottom.

37.00 Bottom of hollow, drains W.

40.04 The ¼ sec. cor. of secs. 15 and 16, monumented with a sandstone, 15x8x5 ins. firmly set in the ground and mkd. ¼ on the W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 20 ins. in the ground, with brass cap mkd.

T1N R23E
¼
S16 | S15
1964

Raise a mound of stone, 2½ ft. base 2 ft. high, W. of the cor.

Bury the original stone cor. below the surface of the ground alongside the iron post.

N. 0° 07' W., beginning new measurement.

Over nearly level canyon bottomland, covered with a dense growth of grass.

0.10 Jeep road, bears E. and W.

1.30 Spring branch, dry, drains W.

2.00 Enter scattered timber.

6.50 Foot of hill; asc. 190 ft. over a SW. slope.

17.30 Rocky spur, projects W.; desc. 25 ft. over a NW. slope.

Dependent resurvey of a portion of the subdivision of T. 1 N., R. 23 E.

CHAINS	
20.00	Point for the N. 1/16 sec. cor. of secs. 15 and 16, at proportionate dist. Set an iron post, 30 ins. long, 2½ ins. in diam., 12 ins. in the ground, to solid rock, and in a mound of stone, 3 ft. base to top, with brass cap mkd. T1N R23E N 1/16 S16 | S15 1964 The above cor. is set in a rockslide, no suitable bearing trees. Desc. 125 ft. over a NW. slope.
40.00	The cor. of secs. 9, 10, 15 and 16, monumented with a sandstone, 15x12x6 ins., firmly set in the ground, and mkd. with 4 notches on the S. and 3 notches on the E. edges. From which the remaining original bearing trees, An aspen 8 ins. in diam., bears N. 0° 30' E., 4 lks. dist., mkd. T1N R23E S10 BT. An aspen dead but standing, 4 ins. in diam., bears S. 50° 15' W., 37 lks. dist., mkd. T1N R23E S16 BT. An aspen 8 ins. in diam., bears N. 44° W., 37 lks. dist., mkd. T1N R23E S9 BT. (record dist. 39 lks.) The SE. tree is dead and fallen. At the cor. point Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd. T1N R23E S9 | S10 S16 | S15 1964 Bury the original stone cor. below the surface of the ground, alongside the iron post. Land, mountainous. Soil, rocky clay. Timber, dense to scattered aspen and pine. Undergrowth, dense grass in the timber openings, scattered service berry, sagebrush and buckbrush, the balance. From the cor. of secs. 10, 11, 14 and 15. S. 89° 51' W., between secs. 10 and 15.

Dependent resurvey of a portion of the subdivision of T. 1 N., R. 23 E.

CHAINS

Over mountainous land, through dense timber; asc. 50 ft. over a SE. slope.

6.50 Divide ridge, between Jackson Creek and Lambsons Draw, bears NE. and SW.; desc. 495 ft. over a NW. slope.

40.10 The ¼ sec. cor. of secs. 10 and 15, monumented with a sandstone, 15x12x6 ins. firmly set in the ground, and mkd. ¼ on the N. face.

From which the original bearing trees,

A pine, 8 ins. in diam., bears S. 45° E., 9 lks. dist., mkd. ¼ S15 BT.

A pine, 8 ins. in diam., bears N. 65° W., 22 lks. dist., mkd. ¼ S10 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 8 ins. in the ground, to solid rock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T1N R23E
¼ S10 / S15

1964

Bury the original stone cor. in the mound alongside the iron post.

S. 89° 34' W., beginning new measurement.

Over mountainous land, through dense timber; desc. 500 ft. over a NW. slope.

40.15 The cor. of secs. 9, 10, 15 and 16.

Land, mountainous.
Soil, rocky clay.
Timber, dense aspen and pine.
Undergrowth, scattered service berry, buckbrush and grass.

Reestablishment of the survey executed by A. D. Ferron, in 1879, and retraced by S. P. and J. R. Stewart, in 1906.

From the standard cor. of secs. 32 and 33, on the S. bdy. of the Tp.

N. 1° 02' W., between secs. 32 and 33.

Over rolling land, through dense undergrowth.

23.18 Wash, 3 ft. deep, 6 lks. wide, drains W.

25.20 Rim of ledges 5 ft. high, bears E. and W.

Dependent resurvey of a portion of the subdivision of T. 1 N., R. 23 E.

CHAINS	
28.23	Creek bed, dry, drains SW.
39.93	Point for the ¼ sec. cor. of secs. 32 and 33, at proportionate dist., there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd. T1N R23E ¼ S32 | S33 1964 Raise a mound of stone, 3 ft. base, 2 ft. high, W. of the cor.
40.36	Net wire fence, (sheep corral) bears E. and W. about 1.00 ch. dist.
42.50	Net wire fence, (sheep corral) bears E. and W. about 1.00 ch. dist.; asc. 35 ft. over a S. slope.
51.00	Spur, projects SW. desc. 30 ft. over a N. slope.
55.90	Hollow, drains SW.; asc. 125 ft. over a S. slope.
66.00	Enter widely scattered timber.
79.86	The cor. of secs. 28, 29, 32 and 33, monumented with a sandstone, 14x11x6 ins. mkd. with 1 notch on the S. and 4 notches on the E. edges. At the cor. point Set an iron post, 30 ins. long, 2½ ins. in diam., 8 ins. in the ground, to solid rock, and in a mound of stone, 5 ft. base to top, with brass cap mkd. T1N R23E S29 | S28 S32 | S33 1964 Bury the original stone cor. in the mound alongside the iron post. Land, gently rolling the first ½ mile, mountainous the second. Soil, rocky clay. Timber, widely scattered juniper the last 14.00 chs. Undergrowth, dense sagebrush and grass.
	From the cor. of secs. 33 and 34, on the S. bdy. of sec. 28. S. 88° 12' W., along the N. bdy. of sec. 33. Over mountainous land, through dense undergrowth; desc. 180 ft. over a W. slope.

Dependent resurvey of a portion of the subdivision of T. 1 N. R. 23 E.

CHAINS	
4.00	Hollow, drains S.; asc. 120 ft. over an E. slope.
14.00	Spur, projects SW.; desc. 145 ft. over a W., changing to a S. slope.
31.47	Point for the S. ¼ sec. cor. of sec. 28, at proportionate dist. between closing cor of secs. 27 and 28, and the S.W. cor. of sec. 28. Set an iron post, 30 ins. long, 2½ ins. in diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd. T1N R23E ¼ S28 1964 Raise a mound of stone, 3 ft. base, 2 ft. high, N. of the cor.
33.00	Spring, drains S. 1.00 ch. into small pond.
40.66	The ¼ sec. cor. originally set for secs. 28 and 33, now functions for the cor. of sec. 33, only, monumented with a sandstone, 15x12x6 ins. firmly set in the ground, and mkd. ¼ on the N. face. At the cor. point Set an iron post, 30 ins. long, 2½ ins. in diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd. T1N R23E ¼ S33 1964 Raise a mound of stone, 3 ft. base, 2 ft. high, S. of the cor. Bury the original stone cor. below the surface of the ground, alongside the iron post.
	S. 89° 10' W., beginning new measurement. Over mountainous land, through dense undergrowth; asc. 70 ft. along a S. slope.
5.00	Spur, projects S.; desc. 20 ft. over a W. slope.
10.00	Hollow, drains S.; asc. 70 ft. over an E. slope.
19.50	Rocky spur, projects S.; desc. 80 ft. over a W. slope.
26.20	Hollow, drains S.; asc. 75 ft. over an E. slope.
36.00	Rocky spur, projects S.; desc. 20 ft. over a W. slope.

Dependent resurvey of a portion of the subdivision of T. 1 N., R. 23 E.

CHAINS	
40.09	The cor. of secs. 28, 29, 32 and 33. Land, mountainous. Soil, rocky clay. No timber. Undergrowth, dense sagebrush and grass, scattered buck-brush.
	N. 0° 08' E., between secs. 28 and 29. Over mountainous land, through dense undergrowth; asc. 275 ft. over a SW. slope.
27.00	Spur, projects W.
28.40	Enter dense timber; desc. 205 ft. over a NW. slope.
39.88	The ¼ sec. cor. originally set for secs. 28 and 29, now functions for sec. 29, only, monumented with a sandstone, 15x12x6 ins. firmly set in the ground, and mkd. ¼ on the W. face. The bearing tree pertaining to sec. 28 agrees with the record, I destroy the marks on this tree. The bearing tree in sec. 29 is dead and fallen. At the cor. point Set an iron post, 30 ins. long, 2½ ins. in diam., 12 ins. in the ground, to solid rock, and in a mound of stone, 3 ft. base to top, with brass cap mkd. T1N R23E ¼ S29 1964 Bury the original stone cor. in the mound, alongside the iron post.
	N. 0° 12' E., beginning new measurement. Over mountainous land, through dense timber; desc. 130 ft. over a NW. slope.
7.58	Point for the ¼ sec. cor. of sec. 28, at proportionate dist. Set an iron post, 30 ins. long, 2½ ins. in diam., 6 ins. in the ground, to solid rock, and in a mound of stone, 5 ft. base to top, with brass cap mkd. T1N R23E ¼ S28 1964 Desc. 215 ft. over a NW. slope.

Dependent resurvey of a portion of the subdivision of T. 1 N., R. 23 E.

CHAINS

15.00 Timber becomes scattered; thence along a W. slope.

40.13 The cor. of secs. 20 and 29, on the W. bdy. of sec. 28, monumented with a sandstone, 21x12x6 ins. firmly set and mkd. with 2 notches on the S. edge.

The original bearing trees are dead and fallen.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.

T1N R23E
S20 | S28
S29 |

1964

Raise a mound of stone, 3½ ft. base, 2½ ft. high, W. of the cor.

Bury the original stone cor., in the mound, alongside the iron post.

Land, mountainous.
Soil, rocky clay.
Timber, dense to scattered aspen and pine.
Undergrowth, scattered sagebrush, service berry, buckbrush and grass.

N. 0° 08' E., along the E. bdy. of sec. 20.

Over mountainous land, through medium dense timber; desc. 50 ft. along a NW. slope.

7.05 Net wire fence, bears N. 30° E., and S. 30° W., leave timber, enter bottomland.

7.40 The closing cor. of secs. 21 and 28, hereinafter described.

Desc. 60 ft. over a gentle N. slope.

29.07 Net wire fence, bears N. 80° W., and S. 80° E.

29.47 Jeep road, bears irregularly W.

39.98 The ¼ sec. cor. originally set for secs. 20 and 21, now functions for sec. 20 only, monumented with a sandstone, 12x7x5 ins. firmly set in the ground, and mkd. ¼ on the W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.

T1N R23E
¼ |
S20 |

1964

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of the cor.

CHAINS	
	Bury the original stone cor. below the surface of the ground, alongside the iron post.
	N. 0° 06' E., beginning new measurement.
	Over nearly level canyon bottomland.
7.25	Point for the ¼ sec. cor. of sec. 21, at proportionate dist.
	Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.
	T1N R23E ¼ S21 1964
	Raise a mound of stone, 3½ ft. base, 2½ ft. high, E. of cor.
13.60	Bottom of Lambsons Draw, drains, SW.
17.20	Old barb wire fence, bears E. and W.
18.40	Jeep road, bears NE. and SW.
29.70	Enter aspen timber; asc. 50 ft. over a S. slope.
37.00	Leave timber; asc. 75 ft. over a rocky S. slope.
39.83	The cor. of secs. 17 and 20, on W. bdy. of sec. 21, monumented with a quartzite 12x9x5 ins. firmly set in a mound of stone, and mkd., with 3 notches on the S. edge.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. in diam., 4 ins. in the ground, to solid rock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.
	T1N R23E S17 | S20 1964
	Bury the original stone cor. in the mound alongside the iron post.
	From the above cor., the NW. cor. of sec. 21, hereinafter described, bears N. 7.25 chs. dist.
	Land, mountainous. Soil, rocky, sandy clay. Timber, patches of dense aspen. Undergrowth, dense grass, scattered sagebrush.

Dependent resurvey of a portion of the subdivision of T. 1 N., R. 23 E.

CHAINS

Reestablishment of the survey executed by S. P. and J. R. Stewart, in 1906

From the cor. of secs. 21, 22, 27 and 28.

S. 89° 56' W. between secs. 21 and 28.

Over mountainous land, through dense timber; asc. 25 ft. over a SW. slope.

1.00 Ridge, between Lambsons Draw and Jackson Creek, bears NE. and SW.; desc. 630 ft. over a W. slope.

40.37 The ¼ sec. cor. of secs. 21 and 28, monumented with a sandstone, 18x14x6 ins., firmly set in the ground, and mkd. ¼ on the N. face.

The original aspen bearing trees are dead and fallen.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 8 ins. in the ground, to solid rock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T1N R23E

¼ S21/S28

1964

Bury the original stone cor. in the mound alongside the iron post.

S. 89° 53' W., beginning new measurement.

Over mountainous land, through dense timber; desc. 345 ft. over a SW. slope.

16.00 Leave timber, enter dense undergrowth; desc. 225 ft. over a W. slope.

48.99 The closing cor. of secs. 21 and 28, monumented with a sandstone, 15x12x5 ins. firmly set in the ground, and mkd. CC on the E., 2 grooves on the S., and 4 grooves on the E. face.

The original bearing tree is dead and fallen.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.

T1N R23E

S20 | S21/S28 CC

1964

CHAINS	
	Raise a mound of stone, 3½ ft. base, 2 ft. high, E. of the cor. Bury the original stone cor. below the surface of the ground, alongside the iron post. From the above cor., the cor. of secs. 20 and 29, bears S. 0° 08' W., 7.40 chs. dist. Land, mountainous. Soil, rocky clay. Timber, patches of dense aspen. Undergrowth, medium dense sagebrush, buckbrush and grass.
	From the cor. of secs. 15, 16, 21 and 22. S. 89° 32' W., between secs. 16 and 21. Over mountainous land, through dense timber; desc. 425 ft. over a NW. slope.
27.00	Stream, 2 ins. deep, 2 lks. wide, flows NW.; asc. 50 ft. over an E. slope.
38.00	Spur, projects N.; desc. 25 ft. over a NW. slope.
40.33	The ¼ sec. cor. of secs. 16 and 21, monumented with a sandstone, 14x9x6 ins. firmly set in the ground, and mkd. ¼ on the N. face. From which the original bearing trees, An aspen, 8 ins. in diam., bears N. 0° 30' E., 68 lks. dist., mkd. ¼ S16 BT. An aspen, 7 ins. in diam., bears S. 3° W., 73 lks. dist., mkd. ¼ S21 BT. At the cor. point Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd. T1N R23E ¼ S16/S21 1964 Bury the original stone cor. below the surface of the ground, alongside the iron post. --- N. 89° 56' W., beginning new measurement. Over mountainous land, through dense timber; desc. 135 ft. over a NW. slope.

Dependent resurvey of a portion of the subdivision of T. 1 N., R. 23 E.

CHAINS	
25.00	Leave timber, enter grass and sagebrush undergrowth.
31.00	Jeep road, bears NE. and SW.
34.50	Creek, bed dry, drains SW.; asc. 15 ft. over a gentle E. slope.
39.73	The cor. of secs. 16 and 17, on N. bdy. of sec. 21, monumented with a sandstone, 20x12x7 ins. firmly set in the ground, and mkd., with 3 notches on the S. and 4 notches on the E. edges. At the cor. point Set an iron post, 30 ins. long, 2½ ins. in diam., 12 ins. in the ground, to solid rock, and in a mound of stone, 3½ ft. base to top, with brass cap mkd. T1N R23E S17 S16 S21 1964 Bury the original stone cor. in the mound alongside the iron post. Asc. 255 ft. over an E. slope, along the N. bdy. of sec. 21.
48.89	The NW. cor. of sec. 21, monumented with a sandstone, 20x12x8 ins. firmly set in the ground, and mkd. with 4 notches on the E. edge and witnessed by a mound of stone SE. of the cor. At the cor. point Set an iron post, 30 ins. long, 2½ ins. in diam., 6 ins. in the ground, to solid rock, and in a mound of stone, 4 ft. base to top, with brass cap mkd. T1N R23E S21 1964 Bury the original stone cor. in the mound alongside the iron post. Land, mountainous. Soil, rocky clay. Timber, dense pine and aspen. Undergrowth, dense grass and sagebrush in the openings in the timber.
	From the cor. of secs. 16 and 17, on the N. bdy. of sec. 21. North between secs. 16 and 17. Over mountainous land, through dense undergrowth; asc. 120 ft. over a S. slope.

Dependent resurvey of a portion of the subdivision of T. 1 N., R. 23 E.

CHAINS	
7.50	Spur, projects SE. 3.00 chs. to end.; desc. 45 ft. over a N. slope.
9.00	Enter dense aspen timber.
11.00	Bottom of hollow, drains E.; asc. 40 ft. over a SE. slope.
19.00	Leave timber.
19.84	Point for the S 1/16 sec. cor. of secs. 16 and 17, at proportionate distance. Set an iron post, 30 ins. long, 2½ ins. in diam., 6 ins. in the ground, to solid rock, and in a mound of stone, 4 ft. base to top, with brass cap mkd. T1N R23E S 1/16 S17 | S16 1964 Asc. 430 ft. over a SE. slope, through medium dense undergrowth.
39.68	The ¼ sec. cor. of secs. 16 and 17, monumented with a sandstone, 24x15x6 ins. firmly set in the ground, and mkd. ¼ on the W. face. At the cor. point Set an iron post, 30 ins. long, 2½ ins. in diam., 12 ins. in the ground, to solid rock, and in a mound of stone, 4 ft. base to top, with brass cap mkd. T1N R23E ¼ S17 | S16 1964 Bury the original stone cor. in the mound alongside the iron post.
	N. 0° 39' W., beginning new measurement. Over mountainous land, through dense timber; asc.305 ft. over a SE. slope.
29.00	Divide ridge, between Lambsons and Davenport draw, bears NE. and SW.; desc. 125 ft. over a NW. slope.
40.55	The cor. of secs. 8, 9, 16 and 17, monumented with a sandstone, 20x8x8 ins. firmly set in the ground, and mkd. with 4 notches on the S. and E. edges. From which the original bearing trees, A pine, 8 ins. in diam., bears N. 77° E., 23 lks. dist., mkd. T1N R23E S9 BT.

Dependent resurvey of a portion of the subdivision of T. 1 N., R. 23 E.

CHAINS

A pine, 8 ins. in diam., bears S. 63° 45' E., 25 lks. dist., mkd. T1N R23E S16 BT

A pine, 6 ins. in diam., bears S. 50° 45' W., 33 lks. dist., mkd. T1N R23E S17 BT.

A pine, 8 ins. in diam., bears N. 34° W., 46 lks. dist., mkd. T1N R23E S 8 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 8 ins. in the ground, to solid rock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T1N R23E

S8	S9
S17	S16

1964

Bury the original stone cor. in the mound alongside the iron post.

Land, mountainous.
Soil, rocky clay.
Timber, aspen and pine.
Undergrowth, sagebrush, buckbrush and grass.

From the cor. of secs. 9, 10, 15 and 16.

S. 89° 52' W., between secs. 9 and 16.

Over mountainous land, through dense aspen timber; desc. 55 ft. over a NW. slope.

4.50 Leave timber, enter grassy bottomland.

15.45 Creek, bed dry, drains irregularly S.

17.65 Jeep road, bears N. and S.; asc. 150 ft. over an E. slope.

30.00 Enter timber; asc. 40 ft. over a SE. slope.

40.05 The ¼ sec. cor. of secs. 9 and 16, monumented with a sandstone, 20x10x8 ins. firmly set in the ground, and mkd. ¼ on the N. face.

From which the original bearing trees,

A pine, 24 ins. in diam., bears N. 35° 45' E., 40 lks. dist., mkd. ¼ S9 BT.

A pine, 24 ins. in diam., bears S. 25° E., 35 lks. dist., mkd. ¼ S16 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

T1N R23E

¼ S9
S16
1964

Dependent resurvey of a portion of the subdivision of T. 1 N., R. 23 E.

CHAINS	
	Bury the original stone cor. below the surface of the ground, alongside the iron post.
	West, beginning new measurement.
	Over mountainous land, through dense timber; asc. 700 ft. over a SE. slope.
25.20	Top of divide ridge, between Lambsons and Davenport draws, bears NE. and SW.; desc. 210 ft. over a NW. slope.
40.18	The cor. of secs. 8, 9, 16 and 17.
	Land, mountainous. Soil, rocky clay. Timber, dense aspen and pine. Undergrowth, dense sagebrush and grass in the openings in the timber.
	Reestablishment of the survey executed by A. D. Ferron in 1878
	From the standard cor. of secs. 31 and 32, on the S. bdy. of the Tp.
	N. 0° 15' W., between secs. 31 and 32.
	Over gently rolling mountainous bench land, through dense undergrowth.
5.00	Jeep road, bears SE. and NW.
27.00	Unimproved dirt road, bears SE. and NW.
40.35	The ¼ sec. cor. of secs. 31 and 32, monumented with a sandstone, 10x8x5 ins. firmly set in the ground, and mkd. ¼ on the W. face.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. in diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd. T1N R23E ¼ S31 | S32 1964
	Bury the original stone cor. below the surface of the ground, alongside the iron post.
	N. 0° 14' W., beginning new measurement.
	Over nearly level bench land, through dense undergrowth.

Dependent resurvey of a portion of the subdivision of T. 1 N., R. 23 E.

CHAINS	
11.71	Power line, bears N. 11° 05' W., and S. 11° 05' E.
30.06	Underground, natural gas pipeline, bears N. 11° 05' W., and S. 11° 05' E.
40.27	The cor. of secs. 29, 30, 31 and 32, monumented with a quartzite, 18x14x5 ins., firmly set in the ground, and mkd. with 1 notch on the S. and 5 notches on the E. edges. At the cor. point Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd. T1N R23E S30 | S29 S31 | S32 1964 Raise a mound of stone, 3 ft. base, 2 ft. high, W., of the cor. Bury the original stone cor., below the surface of the ground, alongside the iron post. Land, mountainous bench. Soil, rocky clay. No timber. Undergrowth, dense sagebrush and grass.
	From the cor. of secs. 28, 29, 32 and 33. S. 89° 47' W., between secs. 29 and 32. Over mountainous land, through dense undergrowth; desc. 445 ft. over a W. slope.
19.42	High water mark on E. side of a small lake in bottom of hollow.
21.42	Present water line on E. side of lake, bears N. about 1½ chs. and S. about 2½ chs.
24.92	Present waterline, on W. side of lake.
26.22	High water mark on W. side of lake; asc. 175 ft. over an E. slope.
38.00	East rim of flat topped spur, projects S.
39.69	Point for the ¼ sec. cor. of sec. 29 and 32, at proportionate distance, there is no remaining evidence of the original cor. Set an iron post, 30 ins long, 2½ ins. in diam., 4 ins. in the ground, to solid rock, and in a mound of stone, 4 ft. base to top, with brass cap mkd. T1N R23E ¼ S29 / S32 1964

Dependent resurvey of a portion of the subdivision of T. 1 N., R. 23 E.

CHAINS	
	Desc. 115 ft. over a W. slope.
50.85	Dry bed of Lambsons Draw, drains SE.; asc.80 ft. over an E. slope.
57.90	Jeep road, bears NW. and SE.
64.50	Top of rise; desc. 20 ft. over a SW. slope.
77.30	Kettle Creek, 1 ft. deep, 3 lks. wide, flows SE.; asc. 10 ft. over a NE. slope.
79.38	The cor. of secs. 29, 30, 31 and 32.
	Land, mountainous. Soil, rocky clay. No timber. Undergrowth, dense sagebrush and grass.
	S. 87° 43' W., between secs. 30 and 31.
	Over mountainous benchland, through dense undergrowth, asc. 35 ft. over a NE. slope.
2.03	Underground natural gas pipeline, bears N. 11° 49' W., and S. 11° 49' E.; thence over nearly level land.
5.50	Power line, bears N. 11° 49' W., and S. 11° 49' E.
30.90	Improved dirt road, bears irregularly N. and S.
39.10	Jeep road, bears NE. and SW.
40.37	The ¼ sec. cor. of secs. 30 and 31, monumented with a sandstone, 10x8x5 ins. firmly set in the ground, and mkd. ¼ on the N. face and witnessed by a mound of stone N.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd. T1N R23E ¼ S30 / S31 1964
	Rebuild the mound of stone N. 3½ ft. base 2 ft. high.
	Bury the original stone cor. below the surface of the ground, alongside the iron post.
	S. 89° 35' W., beginning new measurement.
	Over mountainous benchland, through dense undergrowth; asc. 105 ft. over a gentle E. slope.

Dependent resurvey of a portion of the subdivision of T. 1 N., R. 23 E.

CHAINS

20.00 Point for the W1/16 sec. cor. of secs. 30 and 31, at proportionate distance, based on plat record.

Set an iron post, 30 ins. long, 2½ ins. in diam., 10 ins. in the ground, to solid rock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T1N R23E

W 1/16 S30/S31

1964

21.20 Enter dense pine timber; asc. 20 ft. over an E. slope.

24.20 Spur, projects S.; thence along a S. slope.

31.60 Leave pine, enter dense aspen.

40.19 The cor. of secs. 30 and 31 on the W. bdy. of the Tp., monumented with an iron post, 2 ins. in diam., conforming to the record of the 1938 resurvey.

Land, mountainous.
Soil, rocky clay.
Timber, patches of dense aspen and pine, the last 20.00 chs.
Undergrowth, dense sagebrush and grass.

From the cor. of secs. 29, 30, 31 and 32.

N. 0° 03' W., between secs. 29 and 30.

Over mountainous land, through dense undergrowth; desc. 30 ft. over a NE. slope.

1.70 Kettle Creek, 8 ins. deep, 4 lks. wide, flows SE.; asc. 60 ft. over a S. slope.

7.50 Top of rise out of Kettle Creek; thence over nearly level benchland.

16.30 Jeep road, bears NW. and SE.

22.00 Jeep road, bears E. and W.

40.07 The ¼ sec. cor. of secs. 29 and 30, monumented with a sandstone, 6x6x6 ins., firmly set in the ground, and mkd. ¼ on the W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 18 ins. in the ground, and in a collar of stone, with brass cap mkd.

T1N R23E

¼

S30 | S29

1964

CHAINS	
	Bury the original stone cor. below the surface of the ground, alongside the iron post.
	N. 1° 44' W., beginning new measurement.
	Over mountain benchland, through dense undergrowth.
2.70	Jeep road, bears NE. and SW.
16.00	Enter scattered timber; asc. 275 ft. over a rocky SE. slope.
28.00	Spur, projects SW.; enter dense timber; desc. 95 ft. along a NW. slope.
39.12	The cor. of secs. 19, 20, 29 and 30, monumented with a sandstone, 18x10x6 ins. firmly set in the ground, and mkd. with 2 notches on the S. and 5 notches on the E. edges. (Record calls for an aspen post.)
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. in diam., 8 ins. in the ground, to solid rock, and in a mound of stone, 3½ ft. base to top, with brass cap mkd.
	T1N R23E S19 | S20 S30 | S29 1964
	Bury the original stone cor. below the surface, alongside the iron post.
	Land, mountainous. Soil, rocky clay. Timber, scattered to dense aspen and pine, the last 23.00 chs. Undergrowth, dense sagebrush and grass.
	From the cor. of secs. 20 and 29, on the W. bdy. of sec. 28.
	N. 89° 59' W., between secs. 20 and 29.
	Over mountainous land, through dense timber; desc. 5 ft. over a W. slope.
2.60	Net fence, bears N. 30° E. and S. 30° W.; desc. 20 ft. over a W. slope.
7.00	Leave timber, enter dense undergrowth; desc. 65 ft. over a W. slope.
15.00	Base of descent; thence over gently rolling land.
19.83	Net wire fence, bears N. 15° E., and S. 15° W.
20.00	Unimproved dirt road, bears N. 15° E., and S. 15° W.

Dependent resurvey of a portion of the subdivision of T. 1 N., R. 23 E.

CHAINS

40.40 The ¼ sec. cor. of secs. 20 and 29, monumented with a sandstone, 12x12x8 ins., firmly set in the ground, and mkd. ¼ on the N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

T1N R23E

¼ S20/S29

1964

Bury the original stone cor. below the surface of the ground, alongside the iron post.

S. 88° 39' W., beginning new measurement.

Over canyon bottomland, through dense undergrowth.

3.50 Unimproved dirt road, bears NE. and SW.

6.00 Bottom of Lambsons Draw, drains S.

16.80 Unimproved dirt road, bears NE. and SW.; asc. 365 ft. over an E. slope.

33.00 Top of rocky spur, projects SW.; desc. 130 ft. over a NW. slope.

40.37 The cor. of secs. 19, 20, 29 and 30.

Land, mountainous.
Soil, rocky clay and sandy clay in the canyon bottom.
Timber, aspen and pine.
Undergrowth, sagebrush, grass and buckbrush.

S. 89° 22' W., between secs. 19 and 30.

Over mountainous land, through dense timber; desc. 125 ft. over a NW. slope.

6.80 Leave timber, enter dense undergrowth.

10.20 Bottom of small draw, drains S.; asc. 50 ft. over an E. slope.

17.00 Top of rise.

17.65 Underground natural gas pipeline, bears N. 9° 28' E., and S. 9° 28' W.

18.87 Power line, bears N. 9° 28' E., and S. 9° 28' W., 6.00 chs. to bend to SE.

21.60 Unimproved dirt road, bears N. and S.

Dependent resurvey of a portion of the subdivision of T. 1 N., R. 23 E.

CHAINS	
29.52	Kettle Creek, 4 ins. deep, 4 lks. wide, flows S.; asc. 50 ft. over an E. slope.
40.36	The ¼ sec. cor. of secs. 19 and 30, monumented with a sandstone, 15x9x5 ins., firmly set in the ground, mkd. ¼ on the N. face, and witnessed by a mound of stone N. At the cor. point Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd. T1N R23E ¼ S19/S30 1964 Raise a mound of stone, 3½ ft. base 2½ ft. high N. of the cor. Bury the original stone cor. below the surface of the ground, alongside the iron post.
	S. 89° 15' W., beginning new measurement. Over canyon bottomland, through dense undergrowth; asc. 45 ft. over an E. slope.
8.00	Enter dense timber; asc. 165 ft. over an E. slope.
25.00	Spur, projects N. 70° E.; desc. 70 ft. along a N. slope.
32.00	Hollow, drains N.; asc. 70 ft. over an E. slope.
39.70	The cor. of secs. 19 and 30, on the W. bdy. of the Tp. monumented with an iron post, 2 ins. in diam., conforming to the record of the 1938 resurvey. Land, mountainous. Soil, rocky clay. Timber, dense pine and aspen. Undergrowth, dense sagebrush and grass.
	From the cor. of secs. 19, 20,29 and 30. N. 0° 10' E., between secs. 19 and 20. Over mountainous land, through dense timber; along a NW. slope.
8.00	Hollow, drains W.; asc. 265 ft. over a SW. slope.
36.00	Spur, projects W.; desc. 50 ft. along a NW. slope.
39.95	The ¼ sec. cor. of secs. 19 and 20, monumented with a sandstone, 18x6x4 ins. firmly set in the ground, and mkd. ¼ on the W. face.

Dependent resurvey of a portion of the subdivision of T. 1 N. R. 23 E.

CHAINS

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 6 ins. in the ground, to solid rock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T1N R23E
S19 | S20
1964

Bury the original stone cor. in the mound alongside the iron post.

N. 0° 09' W., beginning new measurement.

Over mountainous land, through dense aspen timber; desc. 165 ft.

Over a NW. slope.

20.80 Leave timber, enter dense sagebrush undergrowth; asc. 20 ft. along a W. slope.

28.00 Top of rise; desc. 60 ft. over a N. slope, through dense aspen timber.

34.20 Hollow, drains W.; asc. 30 ft. over a S. slope.

39.88 The cor. of secs. 19 and 20, on the S. bdy. of sec. 18, monumented with a sandstone, 6x6x18 ins., firmly set in the ground, and mkd. with 5 notches on the E. and 3 notches on the S. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 12 ins. in the ground, to solid rock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T1N R23E
S19 | S20
1964

Bury the original stone cor. in the mound alongside the iron post.

Land, mountainous.
Soil, rocky clay.
Timber, pine and aspen.
Undergrowth, sagebrush, grass and service berry.

Reestablishment of the survey executed by A. D. Ferron in 1878, and retraced by S. P. and J. R. Stewart, in 1906.

From the cor. of secs. 17 and 20, on the W. bdy. of sec. 21.

CHAINS	
	S. 89° 14' W., along the N. bdy. of sec. 20.
	Over mountainous land, through dense undergrowth; asc. 60 ft. over a S. changing to a SE. slope.
7.10	Spur, projects S.; desc. 155 ft. over a W. slope, through aspen timber.
16.40	Broad hollow, drains S.; thence along a S. slope.
19.40	Leave timber.
30.99	Point for the S. ¼ sec. cor. of sec. 17, at midpoint between the SE. and the SW. cors. of sec. 17.
	Set an iron post, 30 ins. long, 2½ ins. in diam., 6 ins. in the ground, to solid rock, and in a mound of stone, 4½ ft. base to top, with brass cap mkd.
	T1N R23E ¼ S17 1964
	Asc. 200 ft. along a SE. slope.
40.37	The ¼ sec. cor. originally set for secs. 17 and 20, now functions for sec. 20 only, monumented with a quartzite, 6x10x6, firmly set in the ground, and mkd. ¼ on the N. face.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. in diam., 4 ins. in the ground, to solid rock, and in a mound of stone, 3½ ft. base to top, with brass cap mkd.
	T1N R23E ¼ S20 1964
	Bury the original stone cor. in the mound, alongside the iron post.
	S. 89° 05' W., beginning new measurement.
	Over mountainous land; asc. 190 ft. along a SE. slope.
15.50	Spur, projects S. desc. 145 ft. along a SW. slope.; enter timber.
30.77	The closing cor. of secs. 17 and 18, hereinafter described; desc. 70 ft. along a S. slope.
40.49	The cor. of secs. 19 and 20, on S. bdy. of sec. 18.
	Land, mountainous. Soil, rocky clay. Timber, pine and aspen. Undergrowth, serviceberry, buckbrush, sagebrush and grass.

Dependent resurvey of a portion of the subdivision of T. 1 N. R. 23 E.

CHAINS

S. 89° 07' W., along N. bdy. of sec. 19.

Over mountainous land, through dense timber, along a S. slope.

2.00 Leave timber.

4.00 Slope changes to W.

4.83 Underground natural gas pipeline, bears N. 10° 50' E., and S. 10° 50' W.

6.53 Power line, bears N. 8° 59' E., and S. 8° 59' W.

10.50 Unimproved dirt road, bears NE. and SW.; desc. 100 ft. along an old fence line, over a W. slope.

30.41 Point for the ¼ sec. cor. of sec. 18, at proportionate distance.

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins in the ground, with brass cap mkd.

T1N R23E

¼ S18

1964

40.56 The ¼ sec. cor. originally set for sec. 18 and 19, now functions for sec. 19 only, monumented with a sandstone, 12x10x9 ins. firmly set in the ground, and mkd. ¼ on the N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins in the ground, and in a collar of stone, with brass cap mkd.

T1N R23E

¼ S19

1964

Bury the original stone cor. below the surface of the ground, alongside the iron post.

S. 89° 30' W., beginning new measurement.

Over mountainous land, through dense undergrowth; desc. 25 ft. over a W. slope.

6.00 Hollow, drains S.; asc. 30 ft. over an E. slope.

12.00 Enter timber; asc. 50 ft. over an E. slope.

20.30 Point for the W 1/16 sec. cor. of sec. 19, at prop. dist

Set an iron post, 30 ins. long, 2½ ins. in diam., 4 ins. in the ground, to solid rock, and in a mound of stone, 3½ ft. base, to top, with brass cap mkd.

Dependent resurvey of a portion of the subdivision of T. 1 N., R. 23 E.

CHAINS	
	T1N R23E W 1/16 S19 1964
	Asc. 235 ft. over an E. slope.
40.20	The cor. of secs. 18 and 19, on the W. bdy. of the Tp., monumented with an iron post, 2 ins. in diam., conforming to the record of the 1938 resurvey.
	Land, mountainous. Soil, rocky clay. Timber, aspen and pine. Undergrowth, sagebrush, grass and buckbrush.
	Reestablishment of the survey executed by S. P. and J. R. Stewart, in 1906
	From the cor. of secs. 8, 9, 16 and 17.
	S. 89° 54' W., between secs. 8 and 17.
	Over mountainous land, through dense timber; desc. 335 ft. over a W. changing to a NW. slope.
39.87	The ¼ sec. cor. of secs. 8 and 17, monumented with a sandstone, 14x10x5 ins. firmly set in the ground, and mkd. ¼ on the N. face.
	From which the original bearing trees,
	A pine, 15 ins. in diam., bears N. 6° E., 48 lks. dist., mkd. ¼ S8 BT.
	A pine, 17 ins. in diam., bears S. 86° E., 57 lks. dist., mkd. ¼ S17 BT.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. in diam., 8 ins. in the ground, to solid rock, and in a mound of stone, 3½ ft. base to top, with brass cap mkd.
	T1N R23E ¼ S8/S17 1964
	Bury the original stone cor. in the mound alongside the iron post.
	S. 89° 30' W., beginning new measurement.
	Over mountainous land, through dense timber; desc. 320 ft. over a NW. slope.

Dependent resurvey of a portion of the subdivision of [illegible]

[illegible] grass and sagebrush covered canyon [illegible]

[illegible]

[illegible] gas [illegible] bears N. [illegible] E., [illegible]

[illegible] monumented with a [illegible] firmly set in the ground, and [illegible] of stone [illegible]

[illegible]

[illegible] in diam., [illegible] brass cap [illegible]

[illegible]

[illegible] base [illegible] high.

[illegible] below the surface of the [illegible]

[illegible]

[illegible] grass [illegible] service berry.

[illegible]

[illegible]

[illegible] bears [illegible]

[illegible] bears [illegible]

[illegible] bears [illegible]

[illegible] bears [illegible]

[illegible] firmly set in the ground, and [illegible]

[illegible]

[illegible] bears [illegible]

[illegible]

[illegible] long [illegible] in diam., [illegible] in the ground, [illegible] and [illegible] mound of stone, [illegible] brass cap [illegible]

Dependent resurvey of a portion of the subdivision of T. 1 N., R. 23 E.

CHAINS	
	T1N R23E ¼ S18 | S17 1964
	Bury the original corner stone in the mound alongside the iron post.
	S. 0° 02' W., beginning new measurement.
	Over mountainous land, through dense timber; asc. 35 ft. over a NW. slope.
4.80	Spur, projects W.; desc. 75 ft. over a S. slope.
13.00	Leave timber, enter dense sagebrush undergrowth; desc. 25 ft. over a S. slope.
20.00	Hollow, drains W.
32.00	Enter dense timber, leave sagebrush undergrowth; asc. 80 ft. over a N. slope.
43.70	Spur, projects W.; desc. 50 ft. over a S. slope.
48.04	The closing cor. of secs. 17 and 18, on N. bdy. sec. 20, monumented with a sandstone, 15x10x10 ins. firmly set in the ground, and mkd. CC on the N., 5 grooves on the E., and 3 grooves on the S. faces.
	From which the original bearing trees.
	A pine, 12 ins. in diam., bears N. 12° 30' E., 195 lks. dist., mkd. T1N R23E S17 BT.
	A pine, 12 ins. in diam., bears N. 52° 45' W., 319 lks. dist., mkd. T1N R23E S18 BT.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. in diam., 22 ins. in the ground, and in a collar of stone, with brass cap mkd.
	T1N R23E C C S18 | S17 1964
	Bury the original cor. below the surface of the ground, alongside the iron post.
	From the above cor. the cor. of secs. 19 and 20, previously described, bears S. 89° 05' W., 9.72 chs. dist.
	Land, mountainous. Soil, rocky clay. Timber, aspen and pine. Undergrowth, sagebrush, grass and service berry.

Dependent resurvey of a portion of the subdivision of T. 1 N., R. 23 E.

CHAINS

From the cor. of secs. 7, 8, 17 and 18.

West, between secs. 7 and 18.

Over rolling canyon bottomland, through dense sagebrush and grass.

2.20 Power line, bears N. 8° 59' E., and S. 8° 59' W.

7.00 Unimproved dirt road, bears N. and S.; desc. 50 ft. over a gentle W. slope.

20.75 Stream, in bottom of Davenport Draw, 4 ins. deep, 2 lks. wide, flows N.; asc. 30 ft. over an E. slope.

32.60 Enter dense timber; asc. 65 ft. over an E. slope.

40.16 The ¼ sec. cor. of secs. 7 and 18, monumented with a sandstone, 20x14x5 ins. firmly set in the ground, and mkd. ¼ on the N. face.

From which an original bearing tree,

A pine, 10 ins. in diam., bears N. 16° E., 74 lks. dist., mkd. ¼ S7 BT.

The SW. bearing tree is dead and fallen.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 6 ins. in the ground, to solid rock, and in a mound of stone, 3½ ft. base to top, with brass cap mkd.

T1N R23E

¼ S7/S18

1964

Bury the original stone cor. in the mound alongside the iron post.

S. 89° 59' W., beginning new measurement.

Over mountainous land, through dense timber; asc. 270 ft. over an E. slope.

11.00 Spur, projects S.; desc. 250 ft. over a W. slope.

26.00 Draw, stream, 4 ins. deep, 2 lks. wide, flows S.; asc. 200 ft. over a SE. slope.

50.41 The closing cor. of secs. 7 and 18, on the W. bdy. of the Tp., monumented with a sandstone, 24x16x8 ins. firmly set and mkd., with CC on the E., 2 notches on the N., and 4 notches on the S. edges.

The original bearing trees are dead and fallen.

At the cor. point.

Dependent resurvey of a portion of the subdivision of T. 1 N., R. 23 E.

CHAINS	
	Set an iron post, 30 ins. long, 2½ ins. in diam., 12 ins. in a rockslide and in a mound of stone, 4 ft. base to top, with brass cap mkd. T1N R22E R23E S12 | S7 | S18 1964 Bury the original stone cor. in the mound alongside the iron post. From the above cor. the A. P. originally set for the cor. of secs. 7, 12, 13 and 18, monumented with a sandstone, 10x9x6 ins. above ground, mkd. AP bears S. 0° 02' E., 8.76 chs. dist., from this AP the cor. of secs. 12 and 13, T. 1 N., R. 22 E., monumented with an iron post, 2 ins. in diam., conforming to the 1938 resurvey record, bears S. 0° 05' E., 76 lks. dist. Land, mountainous. Soil, rocky clay. Timber, aspen and pine. Undergrowth, sagebrush, grass and serviceberry.
	Dependent resurvey of a portion of the West bdy. of T. 1 N., R. 23 E., (Ashley Guide Meridian) for establishment of the S. 1/16 sec. cor. on the W. bdy. of sec. 31.
	Reestablishment of the resurvey executed by J. C. Clark, in 1938. From the standard cor. of Tps. 1 N., Rs. 22 and 23 E. N. 0° 25' W., between secs. 31 and 36. Over mountainous land, through dense undergrowth; asc. 65 ft. over a S. slope.
14.00	Leave dense undergrowth, enter dense timber, bears E. and W.; asc. 30 ft. over a S. slope.
20.045	Point for the S. 1/16 sec. cor. of sec. 31, at proportionate dist. Set an iron post, 30 ins. long, 2½ ins. in diam., 12 ins. in the ground, to solid rock, and in a mound of stone, 3 ft. base to top, with brass cap mkd. T1N R22E R23E | S $\frac{1}{16}$ S31 1964 Asc. 125 ft. over a SE. slope.

Dependent resurvey of a portion of the West bdy. of T. 1 N., R. 23 E., (Ashley Guide Meridian) for establishment of the S. 1/16 sec. cor. on the W. bdy. of sec. 31.

CHAINS

39.49 The ¼ sec. cor. of sec. 36, T. 1 N., R. 22 E., monumente with an iron post, 1 inch in diam., conforming to the record, of the 1938 resurvey.

40.09 The ¼ sec. cor. of sec. 31, monumented with an iron post, 1 inch in diam., conforming to the record, of the 1938 resurvey.

Land, mountainous.
Soil, rocky clay.
Timber, pine.
Undergrowth, sagebrush and grass.

General Description

A considerable variety of land and soil is found in Township 1 North, Range 23 East. The general elevation of the township ranges from about 9100 ft. above sea level, on the top of the mountains in the center of the township, to about 7800 ft. above sea level in the lower canyon bottoms. Most of the mountains in the township are rough and stony, with a considerable amount of broken sandstone, while the bench land, and the broad canyon bottoms are a stony, sandy, clay loam. There is a dense to scattered growth of aspen and pine timber over most of the mountainous land, with serviceberry, buckbrush and wild apple undergrowth. The bench and canyon bottomland is covered with a dense to scattered growth of grass and sagebrush. The east and northern portion of the township drains North, into the Green River, about 4 miles north of the N. bdy. of the township. The remainder of the township drains south, then east, then north through townships 1 and 2 North, Range 24 East, into the Green River. A number of streams, springs and stock watering ponds were noted through the township. There are no permanent habitations in the township. The township is accessible by an unimproved dirt road, from Vernal, Utah.

Form 4-680
(June 1963)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS

NAMES	CAPACITY
Jerry L. Thomas	Principal Assistant
Phylip J. Leslie	Notekeeper
Robert L. Gleave	Chainman
Val H. Kemp	Cornerman
Randal P. Jensen	Flagman

CERTIFICATE OF SURVEY

I, Fred R. Chappell, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 25 day of May, 19 62, I have dependently resurveyed the south boundary, a portion of the west boun and a portion of the subdivisional lines of T. 1 N., R. 23 E.,

of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

May 28, 1965
(Date)

Fred R. Chappell
~~(Cadastral Surveyor)~~
Supervisory Cadastral Surveyor

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

SUBMITTED FOR APPROVAL
Date OCT 20 1966

BUREAU OF LAND MANAGEMENT,
Washington, D. C.

The foregoing field notes of the dependent resurvey of the south boundary, a portio of the west boundary and a portion of the subdivisional lines of T. 1 N., R. 23 E., Salt Lake Meridian, Utah

executed by Fred R. Chappell

having been critically examined and found correct, are hereby approved.

JUN 4 1968
(Date)

Thomas A. Tillman
~~(Chief, Division of Engineering)~~
Acting Chief, Division of Cadastral Survey

CERTIFICATE OF TRANSCRIPT

~~I CERTIFY That the foregoing transcript of the field notes of the above-described surveys in~~

, is a true copy of the original field notes.

(Date)

~~(Chief, Division of Engineering)~~

Blank

Page

Blank

Page

Form 4-679
(January 1963)

391

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

ORIGINAL

FIELD NOTES

OF THE

DEPENDENT RESURVEY

OF

A PORTION OF THE SOUTH BOUNDARY

A PORTION OF THE SUBDIVISIONAL LINES

AND

THE SURVEY OF A PORTION OF THE PRESENT MEANDER LINES OF THE GREEN RIVER

AND ISLANDS IN SECTION 15 IN

TOWNSHIP 2 NORTH, RANGE 23 EAST

Of the SALT LAKE Meridian,

In the State of UTAH.

EXECUTED BY

FRED R. CHAPPELL SUPERVISORY CADASTRAL SURVEYOR

GLEN B. HATCH SUPERVISORY CADASTRAL SURVEYOR

Under special instructions dated MAY 25, 19 62, which provided for the surveys and supplemental special instructions dated January 10, 1967 included under Group Number 456, approved JUNE 8, 1962 & / January 17, 1967

and assignment instructions dated JUNE 8, 19 62, and June 27, 1967.

Survey commenced SEPTEMBER 21, 19 64

INDEX DIAGRAM

Township 2 NORTH, Range 23 EAST,

6	5	4	3	2	1
7	8	9	10	11	12
18	17	40 39 16 38	31 15 40 30	41 23 14 22	42 14 13 13
19	20	36 21 35	29 22 28	20 23 19	12 24 11
30	29	34 28 33	26 27 26	18 26 17	9 25 8
31	32	32 33 6	24 34 4	16 35 3	7 36 2

Meanders of Right Bank of theGreen River - pages 40 through 43
Meanders of islands in Sec. 15 - pages 40 to 44.

Dependent Resurvey of a portion of Township 2 North, Range 23 East

CHAINS

The Ashley Guide Meridian along the W. bdy., the S. bdy., and the subdivisional and meander lines of Township 2 North, Range 23 East, were surveyed by S. P. and J. R. Stewart in 1906. The portion of the west boundary south of the Green River was resurveyed by J. C. Clark, in 1938 under Group 175, and in 1958 George D. Voorhees resurveyed the north 2 miles of this boundary under Group 426. The east boundary was surveyed by A. Jessen in 1898, retraced by S. P. and J. R. Stewart in 1906, and resurveyed by Fred R. Chappell in 1963 under Group 456. The east 2 miles of the north boundary were surveyed by A. D. Ferron in 1878, and independently resurveyed by S. P. and J. R. Stewart in 1906, at which time they surveyed the west 4 miles of this boundary. In 1962 Fred R. Chappell resurveyed the north boundary under Group 456. The subdivisional and meander lines were surveyed by S. P. and J. R. Stewart in 1906. The following field notes are those of a dependent resurvey of the east 4 miles of the south boundary, a portion of the subdivisional lines, and a portion of the meander lines of the right bank of the Green River.

The survey was executed in accordance with the specifications as set forth in the Manual of Instructions, 1947, and the Special Instructions dated May 25, 1962.

Before restoring the corners, the lines of the original survey were retraced, and a diligent search made for any evidence of the original corners, bearing trees and other calls of the original field note record. When duly identified, the corner positions were remonumented.

The direction of the lines of the resurvey were determined by the solar transit method, and checked by numerous altitude observations on the sun, taken throughout the progress of the survey.

The lengths of the lines were determined by chaining where the lines were accessible; lines inaccessible were run by traverse and triangulation methods. Distances to topography on lines run by triangulation and traverse methods are approximate as scaled from reliable U.S.G.S. topographic sheets; the details of such triangulations or traverses have been thoroughly checked and verified and in order to simplify the record the diagrams and reductions are omitted from these field notes.

The geographic position for the southeast corner of the township is Latitude 40° 51' 29.3" N., and Longitude 109° 15' 30.3" W., as adjusted from traverses to U.S.C. & G.S. triangulation stations, "Linwood" at Latitude 41° 00' 14.202" N. and Longitude 109° 27' 39.022" W., located N. 29° 47' 30" E., 86.75 chains distant, from the corner of sections 17, 18, 19 and 20, T. 3 N., R. 22 E., and "Clay Basin," at Latitude 41° 00' 06.048" N. and Longitude 109° 12' 27.304" W., located N. 41° 17' E., 85.51 chains distant, from the corner of sections 16, 17, 20 and 21, T. 3 N., R. 24 E.

The magnetic declination was read at a number of stations throughout the survey and the average of the several readings was found to be N. 16° E.

Dependent Resurvey of a portion of the S. bdy. of T. 2 N., R. 23 E.

CHAINS	
	Reestablishment of the survey executed by S. P. and J. R. Stewart in 1906
	Beginning at the cor. of Tps. 1 and 2 N., Rs. 23 and 24 E., monumented with an iron post, 2½ ins. in diam., set, mkd. and witnessed as described in the 1963 resurvey record of T. 2 N., R. 24 E.
	S. 89° 55' W., along the S. bdy. of sec. 36.
	Over mountainous land, through scattered timber and dense undergrowth; asc. 340 ft. along a SE. slope.
36.00	Spur, projects S.; desc. 10 ft. over a SW. slope.
38.83	The N. ¼ sec. cor. of sec. 1, monumented with an iron post, 2½ ins. diam., set and marked as described in the record of the concurrent resurvey of a portion of the subdivision of T. 1 N., R. 23 E.
40.12	The ¼ sec. cor. of sec. 36, monumented with a sandstone, 22x10x5 ins., firmly set, and mkd. ¼ on N. face.
	From which, the original bearing tree,
	A pinon, 12 ins. diam., bears N. 1° 45' E., 39 lks. dist., mkd. ¼ S 36 BT.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. in diam., 6 ins. in the ground to solid rock and in a mound of stone, 3 ft. base, to top, with brass cap mkd.
	T2N R23E ¼ S36 1964
	Bury the original stone cor. alongside the iron post.
	West, beginning new measurement.
	Desc. 70 ft. over a SW. slope, through dense timber.
28.70	Desc. 300 ft. over ledges and rock slide, leave timber.
38.74	The closing cor. of secs. 1 and 2, T. 1 N., R. 23 E., monumented with an iron post 2½ ins. diam., firmly set and mkd. as described in the record of the concurrent resurvey of a portion of the subdivision of T. 1 N., R. 23 E.
40.01	The cor. of secs. 35 and 36, monumented with a sandstone, 22x8x6 ins., firmly set in the ground, and mkd. with 1 notch on the E. and 5 notches on the W. face.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. in diam., in a mound of stone, 3½ ft. base to top, with brass cap mkd.

Dependent Resurvey of a portion of the S. bdy. of T. 2 N., R. 23 E.

CHAINS	
	T2N R23E S35 | S36 S2 1964 Bury the original stone cor. in the mound alongside the iron post. The above cor. is set in a rock slide; there are no suitable accessories available. Land, broken mountainous. Soil, rocky clay loan and rock slides. Timber, scattered to dense juniper and pinon. Undergrowth, medium dense, sagebrush and grass.
	S. 89° 51' W., along the S. bdy. of sec. 35. Over mountainous land; desc. 75 ft. over a rock slide, sloping W.
3.00	Leave rock slide, enter timber; desc. 125 ft. over a W. slope.
9.80	Jackson Creek, 3 ins. deep, 3 lks. wide, flows irregularly N.; asc. 500 ft. over a NE. slope.
39.125	The N. ¼ sec. cor. of sec. 2, monumented with an iron post, 2½ ins. diam., set and marked as described in the records of the concurrent resurvey of a portion of the subdivision of T. 1 N., R. 23 E.
40.39	The ¼ sec. cor. of sec. 35, monumented with a sandstone, 18x10x5 ins. firmly set in the ground, and mkd. ¼ on the N. face. From which the original bearing tree, A red pine, 8 ins. in diam., bears N. 36° 45' W., 30 lks. dist., mkd. ¼ S35 BT. At the cor. point Set an iron post, 30 ins. long, 2½ ins. in diam., 8 ins. in the ground, to solid rock, and in a mound of stone, 3 ft. base, to top, with brass cap mkd. T2N R23E ¼ S35 1964 Bury the original stone cor. in the mound, alongside the iron post. --- N. 89° 53' W., beginning new measurement. Asc. 250 ft. over a NE. slope, through dense timber.

Dependent Resurvey of a portion of the S. bdy. of T. 2 N., R. 23 E.

CHAINS

10.00 Spur, projects NE., desc. 300 ft. along a N., changing to a NW. slope.

38.00 Bottom of canyon drains N.; asc. 40 ft. over a NE. slope.

39.13 The closing cor. of secs. 2 and 3, T. 1 N., R. 23 E., monumented with an iron post, 2½ ins. diam., firmly set, mkd. and witnessed as described in the record of the concurrent resurvey of a portion of the subdivision of T. 1 N., R. 23 E.

Asc. 35 ft. over a NE. slope.

40.33 The cor. of secs. 34 and 35, monumented with a sandstone, 18x10x5 ins. firmly set in the ground, and mkd. with 2 notches on the E., and 4 notches on the W. face.

From which the original bearing trees,

A pine, 18 ins. in diam., bears N. 66° 30' E., 60 lks. dist., mkd. T2N R23E S35 BT.

A pine, 12 ins. in diam., bears N. 36° W., 80 lks. dist., mkd. T2N R23E S34 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 12 ins in the ground to solid rock, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.

T2N R23E
S34|S35
S3

1964

Bury the original stone cor. in the mound alongside the iron post.

Land, mountainous.
Soil, rocky, clay loam.
Timber, medium dense pinon, juniper and pine.
Undergrowth, scattered patches of sagebrush, grass and medium dense wild apple and service berry.

S. 89° 52' W., along the S. bdy. of sec. 34.

Over mountainous land, through dense timber, asc. 100 ft. over a NE. slope.

3.80 Spur, projects N.; desc. 250 ft. over a W. slope.

17.80 Bottom of hollow, drains N.; leave timber, enter old burned area, covered with a dense growth of small aspen and brush; asc. 400 ft. along a NE. slope.

38.785 The N. ¼ sec. cor. of sec. 3, monumented with an iron po t 2½ ins. diam., firmly set and marked as described in the record of the concurrent resurvey of a portion of T 1 N., R. 23 E.

Dependent Resurvey of a portion of the S. bdy. of T. 2 N., R. 23 E.

CHAINS	
40.40	The ¼ sec. cor. of sec. 34, monumented with a sandstone, 20x12x8 ins., firmly set in the ground, and mkd. ¼ on the N. face. There is no remaining evidence of the original bearing trees. At the cor. point Set an iron post, 30 ins. long, 2½ ins. in diam., 8 ins. in the ground to solid rock, and in a mound of stone, 3½ ft. base, to top, with brass cap mkd. T2N R23E ¼ S34 1964 Bury the original stone cor. in the mound, alongside the iron post.
	S. 89° 55' W., beginning new measurement. Asc. 380 ft. along a NE. slope, through old burned out area, through second growth timber and dense brush.
25.00	Divide ridge between Green River Canyon and Davennport Draw, bears SE. and NW.; leave burned area; enter dense timber; asc. 20 ft. along a S. slope.
38.37	The closing cor. of secs. 3 and 4, T. 1 N., R. 23 E., monumented with an iron post, 2½ ins. diam., firmly set, and mkd. as described in the record of the concurrent resurvey of a portion of the subdivision of T. 1 N., R. 23 E.
39.46	The cor. of secs. 33 and 34, monumented with a sandstone, 24x14x12 ins. firmly set in the ground, and mkd. with 3 notches on the E. and W. edges. The original bearing trees are dead and fallen. At the cor. point Set an iron post, 30 ins. long, 2½ ins. in diam., 12 ins. in the ground to solid rock, and in a mound of stone, 3 ft. base, to top, with brass cap mkd. T2N R23E S33 | S34 S 4 1964 Bury the original stone cor. in the mound, alongside the iron post. Land, mountainous. Soil, rocky clay loam. Timber, dense ponderosa pine, aspen, and fir, except in the burned out area. Undergrowth, dense second growth aspen, service berry and wild apple.

Dependent Resurvey of a portion of the S. bdy. of T. 2 N., R. 23 E.

CHAINS	
	S. 89° 52' W., along the S. bdy. of sec. 33.
	Over mountainous land, through medium dense timber; asc. 45 ft. along a S. slope.
14.30	Top of rise; desc. 260 ft. along a SW. slope.
31.00	Bottom of hollow, drains S.; asc. 75 ft. along a SE. slope.
36.725	The N. ¼ sec. cor. of sec. 4, monumented with an iron post 2½ ins. diam., firmly set and marked as described in the record of the concurrent resurvey of a portion of the subdivision of T. 1 N., R. 23 E.
37.86	The ¼ sec. cor. of sec. 33, marked by a stationary boulder, 15x15x2 ins. above ground, and mkd. with a cross (x) on top, and ¼ on the N. face.
	From which the original bearing tree,
	A ponderosa pine, 25 ins. in diam., bears N. 69° 30' E., 42 lks. dist., mkd. ¼ S33 BT.
	At the cor. point
	Over the cross (x), set an iron post, 30 ins. long, 2½ ins. in diam., in a mound of stone, 4 ft. base, to top, with brass cap mkd.
	T2N R23E ¼ S33 1964
	Bury the old stone corner in the mound alongside the base of the iron post.
	The above cor. is set on small rise projecting S.
	S. 89° 56' W., beginning new measurement.
	Desc. 170 ft. over a SW. slope.
15.00	Bottom of hollow, drains S.; asc. 170 ft. along a SE. slope.
22.00	Spur, projects S.; desc. 45 ft. along a SW. slope.
30.10	Swale, drains, S.; asc. 90 ft. along a SE. slope.
41.22	The closing cor. of secs. 4 and 5, T. 1 N., R. 23 E., monumented with an iron post, 2½ ins. diam., firmly set and mkd. as described in the record of the concurrent resurvey of a portion of the subdivision of T. 1 N., R. 23 E.
42.21	The cor. of secs. 32 and 33, monumented with a sandstone, 24x14x12 ins., firmly set in the ground, and mkd. with 4 notches on the E. and 2 notches on the W. face.

CHAINS

From which the original bearing trees,

A pine, 14 ins. in diam., bears N. 22° 45' E., 139 lks. dist.; mkd. T2N R23E S33 BT.

A pine, 15 ins. in diam., bears N. 39° W., 28 lks. dist.; mkd. T2N R23E S32 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 3 ins. in the ground, to solid rock and in a mound of stone, 3½ ft. base, to top, with brass cap mkd.

T2N R23E
S32|S33
S5

1964

Bury the original stone cor. in the mound, alongside the iron post.

Land, mountainous.
Soil, rocky clay loam.
Timber, medium dense ponderosa, fir and spruce.
Undergrowth, medium dense service berry, wild apple and grass.

Dependent Resurvey of a Portion of the Subdivision of T. 2 N., R. 23 E.

Reestablishment of the Survey Executed by S. P. and J. R. Stewart in 1906

From the cor. of secs. 35 and 36, on the S. bdy. of the Tp.

N. 0° 21' W., between secs. 35 and 36.

Over mountainous land; desc. 300 ft. along a rocky W. slope, through scattered timber and dense undergrowth.

40.01 The ¼ sec. cor. of secs. 35 and 36, monumented with a sandstone, 16x10x6 ins., firmly set in the ground, and mkd. ¼ on the W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 6 ins. in the ground to solid rock, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.

T2N R23E
¼
S35|S36

1964

Dependent Resurvey of a Portion of the Subdivision of T. 2 N., R. 23 E.

CHAINS

Bury the original stone cor. in the mound, alongside the iron post.

The above cor. is located on bottomland, 50 lks. E. of Jackson Creek.

N. 0° 14' W., beginning new measurement.

Desc. 30 ft. through dense undergrowth, along bottomland along E. side of creek.

12.00 Jackson Creek, 3 ins. deep, 3 lks. wide, flows irregularly N. 5° E.; asc. 150 ft. along an E. slope.

34.40 Spur, projects NE.; desc. 105 ft. along a NE. slope.

40.07 The cor. of secs. 25, 26, 35 and 36, monumented with a sandstone, 18x10x6 ins., firmly set in the ground, and mkd. with 1 notch on the E. and S. edges.

At the cor. point

Set an iron post, 30 ins.long, 2½ ins. in diam., 14 ins. in the ground to solid rock, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.

T2N R23E

S26	S25
S35	S36

1964

Bury the original stone cor. in the mound, alongside the iron post.

Land, mountainous.
Soil, rocky clay, loam.
Timber, scattered pine the first ½ mile, medium dense juniper and pinon the second ½ mile.
Undergrowth, dense service berry, choke cherry, scrub mahogany and sagebrush.

From the closing cor. of secs. 25 and 36 on the E. bdy. of the Tp., monumented with an iron post, 2½ ins. diam., set, mkd. and witnessed as described in the 1963 field note record of the W. bdy. of T. 2 N., R. 24 E.

N. 89° 49' W., bet. secs. 25 and 36.

Over mountainous land through scattered pinon and juniper and dense undergrowth of sagebrush and service berry; desc. 210 ft. over NW. slope, changing to N. slope.

10.20 Slope changes to N.

28.20 Ridge spur, projects N. 70° W.; desc. 95 ft. over SW. slope.

40.35 The ¼ sec. cor. of secs. 25 and 36, monumented with a sandstone, 18x10x6 ins., firmly set and mkd. ¼ on W. face.

Dependent Resurvey of a Portion of the Subdivision of T. 2 N., R. 23 E.

CHAINS	
	From which, the original bearing trees,
	A pinon, 10 ins. diam., bears S. 47° 45' E., 49 lks. dist., mkd. ¼ S36 BT.
	A pinon, 8 ins. diam., bears N. 19° 30' W., 75 lks. dist., mkd. ¼ S25 BT.
	At the cor. point
	Set an iron post, 30 ins. long, 3 ins. in the ground to solid rock and in a mound of stone, 4 ft. base, to top, with brass cap mkd.
	T2N R23E ¼ S25/S36 1964
	Deposit the original stone in the mound alongside the iron post.
	West, beginning new measurement.
	Desc. 100 ft. over SW. slope, through dense juniper and pinon.
10.50	Jackson Draw, drains N., irregularly.
11.00	Bladed road, bears N. to Little Hole, and irregularly SE. to Vernal, Utah, along bottom of draw; asc. 100 ft. over an E. slope.
32.40	E. rim of Jackson Creek Canyon, bears N. and S.; desc. 200 ft. over steep W. slope.
38.40	Jackson Creek, 3 in. deep, 3 lks. wide, flows N. 20° W.; asc. 50 ft. over E. slope.
40.37	The cor. of secs. 25, 26, 35 and 36.
	Land, mountainous. Soil, rocky clay. Timber, medium dense juniper and pinon on W. ½ mile and scattered on E. ½ mile. Undergrowth, dense sagebrush and scattered service berry.
	N. 0° 05' W., bet. secs. 25 and 26.
	Over mountainous land, through scattered timber; desc. 45 ft. over a NE. slope.
3.00	Jackson Creek, 3 ins. deep, 3 lks. wide, flows N. 20° W.; asc. 105 ft. along a SW. slope.
12.50	Spur, projects W.; desc. 110 ft. along a W. slope.

Dependent Resurvey of a Portion of the Subdivision of T. 2 N., R. 23 E.

CHAINS

23.60 Jackson Creek, flows N. 30° E.; asc. 40 ft. along a SE. slope.

40.10 The ¼ sec. cor. of secs. 25 and 26, monumented with a sandstone, 20x14x3 ins. firmly set in the ground, and mkd. ¼ on the W. face.

From which the original bearing tree,

A pinon, 20 ins. in diam., bears S. 11° 15' W., 1.22 chs. dist., mkd. ¼ S26 BT. (record S. 16° 40' W., 1.45).

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 8 ins. in the ground to solid rock, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.

T2N R23E
¼
S26 | S25
1964

From which new bearing trees,

A pinon, 4 ins. in diam., bears S. 67° E., 32 lks. dist., mkd. ¼ S25 BT.

A juniper, 8 ins. in diam., bears N. 87° 30' W., 71 lks. dist., mkd. ¼ S26 BT.

Bury the original stone cor. in the mound, alongside the iron post.

N. 0° 07' E., beginning new measurement.

Desc. 55 ft. over a N. slope, through dense timber and undergrowth.

12.60 Dirt road, bears NE. and SW.; desc. 120 ft. over a N. slope.

38.90 Bladed dirt road, bears E. to Vernal, Utah, and W. to Little Hole.

40.15 The cor. of secs. 23, 24, 25 and 26, monumented with a sandstone, 20x12x10 ins., firmly set in the ground, and mkd. with 2 notches on the S. and 1 notch on the E. edge.

From which the original bearing trees, in good condition

A pinon, 12 ins. in diam., bears N. 35° E., 14 lks. dist., mkd. T2N R23E S24 BT.

A pinon, 11 ins. in diam., bears S. 75° 15' E., 46 lks. dist., mkd. T2N R23E S25 BT.

A pinon, 7 ins. in diam., bears S. 34° 15' W., 55 lks. dist., mkd. T2N R23E S26 BT.

CHAINS

A pinon, 6 ins. in diam., bears N. 66° 30' W., 20 lks. dist., mkd. T2N R23E S23 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 18 ins. in the ground to solid rock, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.

T2N R23E
S23 | S24
S26 | S25

1964

Bury the original stone cor. in the mound, alongside the iron post.

Land, mountainous.
Soil, rocky clay loam.
Timber, scattered to dense juniper and pinon.
Undergrowth, patches of dense sagebrush, scant grass.

From the closing cor. of secs. 24 and 25, on the E. bdy. of the Tp., monumented with an iron post, 2½ ins. in diam., set and marked, as described in the 1963 record of the resurvey of the W. bdy. of T. 2 N., R. 24 E.

N. 89° 59' W., between secs. 24 and 25.

Over mountainous land, through dense timber; asc. 50 ft. over a NE. slope.

7.00 Spur, projects N. 20° W.; desc. 110 ft. over a W. slope.

20.00 Timber becomes scattered, enter dense sagebrush; desc. 70 ft. over a W. slope.

40.12 The ¼ sec. cor. of secs. 24 and 25, monumented with a sandstone, 18x8x3 ins. firmly set in the ground, mkd. ¼ on the N. face, and witnessed by a small mound of stone N.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 18 ins. in the ground to solid rock, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.

T2N R23E
S24
¼ S25

1964

Bury the original stone cor. in the mound, alongside the iron post.

Rebuild the mound of stone 3 ft. base, 2 ft. high, N. of the cor.

Dependent Resurvey of a Portion of the Subdivision of T. 2 N., R. 23 E.

CHAINS	
	S. 89° 54' W., beginning new measurement.
	Desc. 30 ft. over a W. slope.
7.00	Jackson Draw, drains N. 85° W.; desc. 85 ft. along S. side of draw.
23.80	Jackson Creek, 3 ins. deep, 3 lks. wide, flows N. 10° W.; asc. 50 ft. over an E. slope.
31.00	Spur, projects N.; desc. 40 ft. over a W. slope.
40.08	The cor. of secs. 23, 24, 25 and 26.
	Land, mountainous. Soil, rocky clay. Timber, dense juniper, pinon and scattered pine the first 20.00 chs., scattered juniper and pinon the balance. Undergrowth, scattered patches of dense sagebrush, scant grass and service berry.
	N. 0° 11' E., between secs. 23 and 24.
	Over mountainous land, through medium dense timber, and undergrowth; desc. 10 ft. over a NW. slope.
0.50	Small wash, drains W.; asc. 50 ft. over a SW. slope.
13.90	Ridge, bears NW. and SE.; desc. 140 ft. over a N. slope.
33.00	S. rim of Jackson Creek Canyon, bears E. and W.; desc. 100 ft. to Jackson Creek.
34.00	Jackson Creek, 3 ins. deep, 3 lks. wide, flows W. about 4.00 chs., thence N5° W.; asc. 100 ft. over ledgy S. slope.
37.00	N. rim of canyon, bears E. and W., about 2.00 chs., thence N. 0° 05' W.; desc. 15 ft. along E. rim of canyon.
40.15	The ¼ sec. cor. of secs. 23 and 24, mkd. by a cross (x) cut on top of a sandstone ledge, and mkd. ¼ W. of cross.
	From which an original bearing tree,
	A pine, 24 ins. in diam., bears S. 39° W., 30 lks. dist., mkd. ¼ S23 BT. (record S. 35° 10' W., 32 lks).
	No evidence of the other bearing tree was found.
	At the cor. point.
	Over the cross (x), set an iron post, 30 ins. long, 2½ ins. in diam., in a mound of stone, 5 ft. base, to top, with brass cap mkd.

T2N R23E
¼
S23 | S24
1964

Dependent Resurvey of a Portion of the Subdivision of T. 2 N., R. 23 E.

CHAINS	
	N. 0° 10' E., beginning new measurement.
	Desc. 310 ft. along a ledgy NW. slope, through dense timber.
40.24	The cor. of secs. 13, 14, 23 and 24, monumented with a sandstone, 20x14x4 ins., firmly set in the ground, and mkd. with 1 notch on the E. and 3 notches on the S. faces.
	From which the original bearing trees,
	A pinon, 10 ins. in diam., bears N. 67° 15' E., 57 lks. dist., mkd. T2N R23E S13 BT.
	A pinon, 15 ins. in diam., bears S. 59° 30' E., 29 lks. dist., mkd. T2N R23E S24 BT.
	A pinon, 12 ins. in diam., bears S. 41° W., 36 lks. dist., mkd. T2N R23E S23 BT.
	A pinon, 14ins. in diam., bears N. 37° W., 39 lks. dist., mkd. T2N R23E S14 BT.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. in diam., 8 ins. in the ground to solid rock, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.
	T2N R23E S14 | S13 S23 | S24 1964
	Bury the original stone cor. in the mound, alongside the iron post.
	Land, mountainous. Soil, rocky clay. Timber, dense juniper and pinon. Undergrowth, patches of dense sagebrush, scattered service berry and grass.
	From the closing cor. of secs. 13 and 24, on the E. bdy. of the Tp., monumented with an iron post, 2½ ins. in diam., set and marked as described in the 1963 record of the resurvey of the W. bdy. of T. 2 N., R. 24 E.
	S. 89° 48' W., between secs. 13 and 24.
	Over mountainous land, through medium dense timber; desc. 90 ft. over a NW. slope.
5.10	Draw, drains NW.; asc. 40 ft. over a NE. slope.
10.00	Spur, projects NW.; desc. 100 ft. over a NW. slope.
13.50	Draw, drains NW.; asc. 50 ft. along a N. slope.

Dependent Resurvey of a Portion of the Subdivision of T. 2 N. R. 23 E.

CHAINS

24.00 Spur projects NW.; desc. 150 ft. over a W. slope.

33.50 Draw, drains NW.; asc. 30 ft. along a NE. slope.

39.63 The ¼ sec. cor. of secs. 13 and 24, mkd. by a cross (x) cut on the top of a stationary sandstone boulder, 3x2x1 ft. above ground, and mkd. ¼ on the N. face.

From which the original bearing trees,

A pinon, 13 ins. in diam., bears N. 61° 15' E., 8 lks. dist., mkd. ¼ S13 BT.

A pinon, 10 ins. in diam., bears S. 50° W., 14 lks. dist., mkd. ¼ S24 BT.

At the cor. point

Over the cross (x), set an iron post, 30 ins. long, 2½ ins. in diam., in a mound of stone, 6 ft. base to top, with brass cap mkd.

T2N R23E
¼ S13/S24

1964

N. 89° 35' W., beginning new measurement.

Asc. 120 ft. along a NE. slope, through dense timber.

11.30 Spur, projects N.; desc. 90 ft. along a NW. slope.

21.30 Draw, drains N.; asc. 175 ft. over an E. slope.

32.80 Spur, projects N.; timber becomes scattered; desc. 85 ft. over a NW. slope.

40.09 The cor. of secs. 13, 14, 23 and 24.

Land, mountainous.
Soil, rocky clay.
Timber, dense to scattered pinon, juniper and pine.
Undergrowth, medium dense sagebrush, service berry and grass.

N. 0° 03' W., between secs. 13 and 14.

Over mountainous land, through dense timber; desc. 300 ft. over a NW. slope.

23.00 Enter Devils Hole; leave timber; enter medium dense undergrowth; desc. 40 ft. over gentle N. slope.

32.40 Draw, drains NW.; thence along bottom of draw, draining N.

Dependent Resurvey of a Portion of the Subdivision of T. 2 N., R. 23 E.

CHAINS	
35.60	Jackson Creek at bend, 3 ins. deep, 3 lks. wide, flows N. 5° W. from S. 0° W.; continue along bottom of draw.
39.62	The ¼ sec. cor. of secs. 13 and 14, monumented with a sandstone, 16x10x4 ins., firmly set in the ground, and mkd. ¼ on the W. face, and witnessed by a mound of stone, 2 ft. base, 1½ ft. high, W. of the cor.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. in diam., 8 ins. in the ground, to solid rock, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.
	T2N R23E ¼ S14 | S13 1964
	Bury the original stone cor. in the mound alongside the iron post.
	Rebuild the mound of stone west.
	N. 0° 35' W., beginning new measurement.
	Asc. 40 ft. over abrupt SW. slope.
2.30	Spur, projects N. 80° W. about 2.00 chs. to end; desc. 60 ft. over N. slope.
4.80	Jackson Creek, flows N. 60° E.; asc. 60 ft. over a S. slope.
7.50	Spur, projects N. 60° E.; desc. 120 ft. over a N. slope.
12.68	Point for the meander cor. of secs. 13 and 14 on the right bank of the Green River, determined from the original bearing trees; course of river, N. 77° E.
	From which the original bearing trees,
	A juniper, 10 ins. in diam., bears S. 43° E., 53 lks. dist., mkd. T2N R23E S13 MCBT.
	A juniper, 6 ins. in diam., bears S. 80° W., 36 lks. dist., mkd. T2N R23E S14 MCBT.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. in diam., 10 ins. in the ground to solid rock, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.
	M C S14 | S13 T2N R23E 1964

Dependent Resurvey of a Portion of the Subdivision of T. 2 N., R. 23 E.

CHAINS

Land, mountainous.
Soil, rocky clay.
Timber, dense juniper and pinon, the first 23.00 chs.; no timber the balance.
Undergrowth, dense patches of sagebrush, service berry and grass.

From the cor. of secs. 34 and 35 on the S. bdy. of the Tp.

N. 0° 06' E., between secs. 34 and 35.

Over mountainous land, through dense timber; desc. 95 ft. over a N. slope.

5.00 Slope changes to NW.; desc. 225 ft.

11.70 Timber becomes scattered; enter dense sagebrush; desc. 50 ft. over a NW. slope.

16.20 Bottom of hollow, drains NE.; desc. 15 ft. along a SE. slope.

20.10 Point for the S. 1/16 sec. cor. of secs. 34 and 35, at proportionate dist.; this cor. is an angle point on the Ashley National Forest Boundary.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 6 ins. in the ground, to solid rock, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.

S1/16
S34 | S35

1964

23.70 Spur, projects NE.; desc. 180 ft. over a NW. slope.

40.20 The ¼ sec. cor. of secs. 34 and 35, monumented with a sandstone, 18x12x10 ins., firmly set in the ground, mkd. ¼ on the W. face, and witnessed by a mound of stone 2 ft. base, 1½ ft. high, W. of the cor.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 10 ins. in the ground, to solid rock, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.

T2N R23E
¼
S34 | S35

1964

Bury the original stone cor. in the mound, alongside the iron post, and rebuild the mound of stone W., 3 ft. base, 2½ ft. high.

Dependent Resurvey of a Portion of the Subdivision of T. 2 N., R. 23 E.

CHAINS	
	N. 0° 04' W., beginning new measurement.
	Desc. 215 ft. over a W. slope, through scattered timber.
17.35	Jeep road, bears W. and NE.; desc. 25 ft. over a W. slope.
19.30	Draw, drains NW.; asc. 20 ft. along a W. slope.
24.30	Recross road, bears NW. and SE.
24.50	Spur, projects N. 20° W.; desc. 130 ft. along an E. slope.
40.00	The cor. of secs. 26, 27, 34 and 35, monumented with a sandstone, 20x14x10 ins. firmly set in the ground, mkd. with 1 notch on the S. and 2 notches on the E. edge, and witnessed by a mound of stone, 2 ft. base, 1½ ft. high, W. of the cor. At the cor. point Set an iron post, 30 ins. long, 2½ ins. in diam., 6 ins. in the ground, to solid rock, and in a mound of stone, 3½ ft. base, to top, with brass cap mkd. T2N R23E S27 S26 S34 S35 1964 Bury the original stone cor. in the mound alongside the iron post, and rebuild the mound W., 3 ft. base, 2 ft. high. Land, mountainous. Soil, rocky clay. Timber, dense fir and lodgepole pine the first 10.00 chs., scattered juniper and pinon the balance. Undergrowth, dense to scattered sagebrush, service berry, wild apple and grass.
	From the cor. of secs. 25, 26, 35 and 36.
	S. 89° 57' W., between secs. 26 and 35.
	Over mountainous land, through dense timber; asc. 105 ft. over an E. slope.
3.30	Spur, projects N.; desc. 105 ft. over a W. slope.
14.00	Timber becomes scattered; desc. 50 ft. over a W. slope.
35.00	Bottom of descent; leave timber, enter dense sagebrush; thence over gently rolling land.
40.13	The ¼ sec. cor. of secs. 26 and 35, monumented with a sandstone, 18x10x6 ins., set in a mound of stone, and mkd. ¼ on the N. face.

Dependent Resurvey of a Portion of the Subdivision of T. 2 N., R. 23 E.

CHAINS

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 14 ins. in the ground, to solid rock, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.

T2N R23E
¼ S26 / S35

1964

Deposit the original cor. alongside the iron post.

Raise a mound of stone, 3 ft. base, 2½ ft. high, N. of the cor.

S. 89° 59' W., beginning new measurement.

Over gently rolling land.

3.35 Jeep road, bears N. and S.; asc. 70 ft. over bench land, sloping gently to the N.

30.60 Rim of draw, bears N. and S.; desc. 75 ft. over a W. slope.

35.50 Draw, drains N.; asc. 125 ft. over an E. slope.

40.12 The cor. of secs. 26, 27, 34 and 35.

Land, mountainous the first 35.00 chs., bench land the balance.
Soil, rocky, clay loam.
Timber, dense juniper and pinon the first 14.00 chs., scattered the balance.
Undergrowth, dense patches of sagebrush and grass, scattered, service berry and buck brush.

N. 0° 06' W. between secs. 26 and 27.

Over mountainous land, through scattered timber and dense undergrowth; desc. 115 ft. along an E. slope.

20.70 Spur, projects N. 10° E.; jeep road, on top of spur, bears N. 10° E. and S. 10° W.; desc. 235 ft. along a NW. slope.

40.01 The ¼ sec. cor. of secs. 26 and 27, monumented with a sandstone, 14x10x5 ins. firmly set in the ground, and mkd. ¼ on the W. face, and witnessed by a mound of stone W.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 18 ins. in the ground, to solid rock, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.

CHAINS	
	T2N R23E ¼ S27 | S26 1964
	Bury the original stone cor. alongside the iron post.
	Rebuild the mound of stone, W., 3 ft. base, 2 ft. high.
	N. 0° 01' E., beginning new measurement.
	Desc. 100 ft. along a NW. slope.
10.90	Draw, drains N. 10° E.; desc. 45 ft. along a NE. slope.
26.40	Spur, projects NE.; desc. 80 ft. over a N. slope.
39.40	Ledge, 40 ft. high, faces N.
40.13	The cor. of secs. 22, 23, 26 and 27, monumented with a sandstone, 20x10x6 ins., firmly set in the ground, and mkd. with 2 notches on the S. and E. edges, and witnessed by a mound of stone W.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. in diam., 12 ins. in the ground, to solid rock, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.
	T2N R23E S22 | S23 S27 | S26 1964
	Bury the original stone cor. in the mound, alongside the iron post.
	Rebuild the mound of stone W., 3 ft. base, 2½ ft. high.
	Land, mountainous. Soil, rocky clay. Timber, scattered juniper and pinon. Undergrowth, dense sagebrush, scattered grass and buckbrush.
	From the cor. of secs. 23, 24, 25 and 26.
	S. 89° 45' W., between secs. 23 and 26.
	Over mountainous land, through dense timber; desc. 50 ft. over a W. slope.
10.10	Dirt road, bears NW. to Little Hole, and SE. to Vernal; thence along a NW. slope.
22.00	Draw, drains N.; asc. 30 ft. along a NE. slope.

Dependent Resurvey of a Portion of the Subdivision of T. 2 N. R. 23 E.

CHAINS

40.30 The ¼ sec. cor. of secs. 23 and 26, monumented with a sandstone, 14x10x5 ins. firmly set in the ground, and mkd. ¼ on the N. face.

From which the original bearing trees,

A pinon, 8 ins. in diam., bears N. 12° 30' E., 32 lks. dist., (record 28 lks.) mkd. ¼ S23 BT.

A dead pinon, 18 ins. in diam., bears S. 21° 15' W., 51 lks. dist., (record S. 20° 20' W., 54 lks.) mkd. ¼ S26 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 20 ins. in the ground, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.

T2N R23E
S23
¼ S26

1964

From which, a new bearing tree,

A pinon, 6 ins. in diam., bears S. 20° 45' E., 16 lks. dist., mkd. ¼ S26 BT.

Bury the original stone cor. alongside the iron post.

N. 89° 58' W., beginning new measurement.

Asc. 20 ft. over a NE. slope.

2.30 Low spur, projects NE.; desc. 260 ft. over a NW. slope.

23.80 Draw, drains N. 10° E.; asc. 40 ft. over a NE. slope.

28.00 Low spur, projects N.; desc. 60 ft. over a NW. slope.

33.60 Draw, drains N.; asc. 85 ft. over a NE. slope.

40.12 The cor. of secs. 22, 23, 26 and 27.

Land, rolling mountainous.
Soil, rocky clay.
Timber, dense to scattered juniper and pinon.
Undergrowth, dense patches of sagebrush, scattered service berry and buckbrush.

N. 0° 03' E., between secs. 22 and 23.

Over mountainous land, through scattered timber; desc. 120 ft. over a N. slope.

5.00 Draw, at bend, drains NW. from SW.

8.50 Draw, drains N. 75° W. about 6.00 chs. to junction with previous draw; asc. 60 ft. along a SW. changing to W. slope.

20.50 Spur, projects W.; desc. 40 ft. along a W. slope.

Dependent Resurvey of a portion of the subdivision of T. 2 N., R. 23 E.

CHAINS	
32.80	Slope, changes to N.; desc. 60 ft.
40.09	The ¼ sec. cor. of secs. 22 and 23, monumented with a sandstone, 18x7x5 ins., firmly set in the ground, and mkd. ¼ on the W. face. From which the original bearing trees, A pinon, 13 ins. in diam., bears S. 30° E., 19 lks. dist., mkd. ¼ S23 BT. A pinon, 12 ins. in diam., bears S. 54° W., 25 lks. dist., mkd. ¼ S22 BT. At the cor. point Set an iron post, 30 ins. long, 2½ ins. in diam., 12 ins. in the ground, to solid rock, and in a mound of stone, 3½ ft. base, to top, with brass cap mkd. T2N R23E ¼ S22 | S23 1964 Bury the original stone cor. in the mound, alongside the iron post.
	N. 0° 09' W., beginning new measurement.
0.60	Small draw, drains W.; asc. 100 ft. over a SW. slope.
11.60	Spur, projects W.; desc. 30 ft. along a W. slope.
14.30	Head of gulch, drains W.; asc. 30 ft. along a SW. slope.
15.70	Spur, projects W.; desc. 150 ft. over a N. slope.
24.20	Draw, drains W.; asc. 50 ft. over a S. slope.
28.30	Graded road, bears E. to Vernal, Utah, and W. to Little Hole; asc. 90 ft. over a S. slope.
32.30	Spur, projects S. 60° W.; desc. 30 ft. over a NW. slope.
39.99	The cor. of secs. 14, 15, 22 and 23, monumented with a sandstone, 16x12x5 ins., firmly set in the ground, and mkd. with 3 notches on the S. and 2 notches on the E. edges. From which, the original bearing trees, A pinon, 15 ins. in diam., bears N. 54° E., 13 lks. dist., mkd. T2N R23E S14 BT. A juniper, 8 ins. in diam., bears S. 52° E., 16 lks. dist., mkd. T2N R23E S23 BT. A pinon, 15 ins. in diam., bears S. 52° W., 1.01 chs. dist., mkd. T2N R23E S22 BT.

Dependent Resurvey of a portion of the subdivision of
T 2 N R 2 E

CHAINS

A juniper, 10 ins. in diam., bears N. 53° W., 40 lks. dist., mkd. T2N R23E S15 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 4 ins. in the ground, to solid rock, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.

T2N R23E	
S15	S14
S22	S23

1964

Bury the original stone cor. in the mound, alongside the iron post.

Land, mountainous.
Soil, rocky clay.
Timber, scattered to dense juniper and pinon.
Undergrowth, dense patches of sagebrush, scattered buck brush and grass.

From the cor. of secs. 13, 14, 23 and 24.

S. 89° 36' W., between secs. 14 and 23.

Over mountainous land, through dense timber; desc. 240 ft. over a NW. changing to W. slope.

9.60 Jackson Creek, 4 ins. deep, 2 lks. wide, flows N.; asc. 45 ft. over a NE. slope.

15.90 Spur, projects N.; desc. 30 ft. along a NW. slope.

18.50 Draw, drains NE.; asc. 290 ft. over an E. slope.

30.30 Spur, projects NE.; desc. 30 ft. along a N. slope.

36.90 Draw, drains NE.; asc. 80 ft. over a NE. slope.

40.83 The ¼ sec. cor. of secs. 14 and 23, monumented with a sandstone 16x12x5 ins. firmly set in the ground, and mkd. ¼ on the N. face.

From which the original bearing trees,

A pinon, 9 ins. in diam., bears S. 30° W., 37 lks. dist., mkd. ¼ S23 BT.

A pinon, 10 ins. in diam., bears N. 75° W., 42 lks. dist., mkd. ¼ S14 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 8 ins. in the ground, to solid rock, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.

T2N R23E	
	S14
¼	S23

1964

Dependent Resurvey of a Portion of the Subdivision of
T. 2 N., R. 23 E.

CHAINS	
	Bury the original stone cor. in the mound alongside the iron post.
	S. 89° 58' W., beginning new measurement.
	Asc. 30 ft. over a NE. slope.
2.80	Jeep road, bears NE. and SW. about 5.00 chs. to graded road; asc. 60 ft. over an E. slope.
6.00	N. side of saddle, bears NW. and SE.; thence along a S. slope.
29.60	Spur, projects S. 80° W.; desc. 80 ft. over a NW. slope.
39.92	The cor. of secs. 14, 15, 22 and 23.
	Land, mountainous. Soil, rocky clay. Timber, dense to scattered pinon and juniper. Undergrowth, scant sagebrush, grass, wild apple and buck brush.
	N. 0° 10' E., between secs. 14 and 15.
	Over mountainous land, through medium dense timber; desc. 350 ft. over a broken NW. slope.
28.50	Leave broken land; desc. 40 ft. over a gentle NW. slope.
36.00	Enter broken land; desc. 120 ft. over steep NW. slope.
39.30	Ledge 100 ft. high, faces N.
39.91	The ¼ sec. cor. of secs. 14 and 15, monumented with a sandstone, 18x14x6 ins., firmly set in the ground, mkd. ¼ on the W. face., and witnessed by a mound of stone W., 2 ft. base, 3 ft. high.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. in diam., 5 ins. in the ground, to solid rock, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.
	T2N R23E ¼ S15 | S14 1964
	Bury the original stone cor. in the mound, alongside the iron post.
	Rebuild the mound of stone, 3 ft. base, 2½ ft. high, W. of the cor.

Dependent Resurvey of a Portion of the Subdivision of T. 2 N., R. 23 E.

CHAINS

N. 0° 03' E., beginning new measurement.

Desc. 50 ft. over a N. slope.

1.00 The meander cor. of secs. 14 and 15, on the right bank of the Green River, monumented with a sandstone, 18x14x ins., firmly set in the ground, and mkd. MC on the N. and with 2 grooves on the E. face.

From which, the original bearing trees,

A pinon, 14 ins. in diam., bears S. 62° 30' E., 68 lks. dist., mkd. T2N R23E S14 MCBT.

A pinon, 12 ins. in diam., bears S. 36° 30' W., 1.45 lks. dist., mkd. T2N R23E S15 MCBT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 12 ins. in the ground, to solid rock, and in a mound of st e, 3 ft. base, to top, with brass cap mkd.

M C
S15 | S14
T2N | R23E

1946

Bury the original stone cor. alongside the iron post.

Land, mountainous.
Soil, rocky clay.
Timber, medium dense juniper and pinon.
Undergrowth, patches of dense sagebrush, scattered service berry, buck brush and grass.

From the cor. of secs. 33 and 34, on the S. bdy. of the Tp.

N. 0° 12' W., between secs. 33 and 34.

Over mountainous land, through dense timber; asc. 55 ft. over a S. slope.

2.40 Ridge, bears N. 85° W. and S. 85° E.; enter old burned area; desc. 165 ft. over a N. slope through dense undergrowth.

12.00 Leave burned area; enter dense timber; desc. 750 ft. over a N. slope.

39.24 The ¼ sec. cor. of secs. 33 and 34, monumented with a sandstone, 28x10x8 ins., firmly set in the ground, and mkd. ¼ on the W. face.

From which, the original bearing trees,

A pine, 18 ins. in diam., bears N. 88° E., 14 lks. dist., mkd. ¼ S34 BT.

A dead pine, 14 ins. in diam., bears W., 10 lks. dist., mkd. ¼ S33 BT.

Dependent Resurvey of a Portion of the Subdivision of T. 2 N., R. 23 E.

CHAINS	
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. in diam., 6 ins. in the ground, to solid rock, and in a mound of stone, 5 ft. base, to top, with brass cap mkd.
	T2N R23E ¼ S33 | S34 1964
	Bury the original stone cor. in the mound alongside the iron post.
	N. 0° 53' W., beginning new measurement.
	Desc. 100 ft. over a N. slope.
6.00	Timber becomes scattered; enter dense sagebrush undergrowth; desc. 200 ft. over a N. slope.
36.00	Slope becomes more gradual; desc. 25 ft.
40.82	The cor. of secs. 27, 28, 33 and 34, monumented with a sandstone, 16x10x6 ins., firmly set in the ground, and mkd. with 1 notch on the S. and 3 notches on the E. edge.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. in diam., 10 ins. in the ground, to solid rock, and in a mound of stone, 3½ ft. base, to top, with brass cap mkd.
	T2N R23E S28 | S27 S33 | S34 1964
	From which, new bearing trees,
	A pinon, 24 ins. in diam., bears N. 14° 15' E., 2.90 lks. dist., mkd. T2N R23E S27 BT.
	A pinon, 24 ins. in diam., bears S. 16° W., 2.55 lks. dist., mkd. T2N R23E S33 BT.
	A pinon, 20 ins. in diam., bears N. 45° 15' W., 31 lks. dist., mkd. T2N R23E S28 BT.
	Bury the original stone cor. in the mound, alongside the iron post.
	Land, mountainous. Soil, rocky clay. Timber, dense patches of pine, fir and spruce the first ½ mile, dense to scattered pinon and juniper, the balance.

Dependent Resurvey of a portion of the subdivision of T. 2 N., R. 23 E.

CHAINS

From the cor. of secs. 26, 27, 34 and 35.

S. 89° 58' W., between secs. 27 and 34.

Over mountainous land, through scattered timber and dense undergrowth; asc. 10 ft. over an E. slope.

3.00 Jeep road, bears N. and S.

4.60 Spur, projects N.; desc. 160 ft. over a W. slope.

15.90 Draw, drains NW.; asc. 130 ft. over an E., changing to NE. slope.

40.20 The ¼ sec. cor. of secs. 27 and 34, monumented with a sandstone 18x8x5 ins., firmly set in the ground, mkd. ¼ on the N. face and witnessed by a mound of stone, 2 ft. base, 1½ ft. high, N. of the cor.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 20 ins in the ground, and in a collar of stone, with brass cap mkd.

T2N R23E
S27
¼
S34

1964

Bury the original stone cor. alongside the iron post.

Rebuild the mound of stone N., 3 ft. base, 2 ft. high.

S. 89° 51' W., beginning new measurement.

Asc. 70 ft. over a NE. slope.

6.00 Unimproved dirt road, bears N. 30° W., and S. 30° E.

29.90 Top of rise, slopes N.; desc. 20 ft. over a NW. slope.

36.90 Unimproved dirt road, bears SE. and N. 80° W.; desc. 15 ft. over a NW. slope.

40.31 The cor. of secs. 27, 28, 33 and 34.

Land, rolling mountains.
Soil, rocky, clay loam.
Timber, scattered juniper and pinon.
Undergrowth, dense sagebrush, scattered grass and buck brush.

N. 0° 15' E., between secs. 27 and 28.

Over mountainous land, through scattered timber and dense undergrowth; desc.75 ft. along a NW. slope.

1.50 Unimproved dirt road, bears S. 80° E., and N. 80° W.

Dependent Resurvey of a Portion of the Subdivision of T. 2 N., R. 23 E.

CHAINS	
25.80	Enter dense timber; slope changes to the N.; desc. 100 ft.
36.20	Trail road, bears SE. and W.
40.01	The ¼ sec. cor. of secs. 27 and 28, monumented with a sandstone, 16x12x10 ins., firmly set and mkd. ¼ on the W. face.
	From which, the original bearing trees,
	A pinon, 24 ins. in diam., bears N. 36° E., 1.20 lks. dist., mkd. ¼ S27 BT.
	A pinon, 16 ins. in diam., bears N. 34° W., 1.29 lks. dist., mkd. ¼ S28 BT.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. in diam., 6 ins. in the ground, to solid rock, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.
	T2N R23E ¼ S28 | S27 1964
	Bury the original stone cor. in the mound alongside the iron post.
	N. 0° 26' W., beginning new measurement.
	Desc. 25 ft. over a N. slope.
22.50	Head of small draw, drains NW.; timber becomes scattered; desc. 310 ft. over a broken NW. slope.
39.98	The cor. of secs. 21, 22, 27 and 28, monumented with a sandstone, 16x12x3 ins., firmly set in the ground, mkd. with 2 notches on the S. and 3 notches on the E. edges, and witnessed by a mound of stone W.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. in diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.
	T2N R23E S21 | S22 S28 | S27 1964
	Bury the original stone cor. alongside the iron post.
	Raise a mound of stone, 3 ft. base, 2 ft. high, W. of the cor.
	Land, mountainous. Soil, rocky, clay loam. Timber, dense to scattered pinon and juniper. Undergrowth, dense patches of sagebrush, scattered buck brush and grass.

Dependent Resurvey of a portion of the Subdivision of T. 2 N., R. 23 E.

CHAINS

From the cor. of secs. 22, 23, 26 and 27.

N. 89° 56' W., between secs. 22 and 27.

Over mountainous land, through scattered timber, and dense undergrowth; desc. 20 ft. along a N. slope.

2.20 Draw, drains N. 15° E.; asc. 40 ft. over a NE. slope.

8.50 Spur, projects N. 10° E.; desc. 150 ft. over a NW. slope.

22.70 Draw, drains NE.; asc. 170 ft. over a SE. slope.

31.50 Spur, projects NE.; desc. 190 ft. over a W. slope.

39.78 The ¼ sec. cor. of secs. 22 and 27, monumented with a sandstone, 23x20x8 ins., firmly set in the ground and mkd. ¼ on the N. face.

From which, the original bearing trees,

A pinon, 10 ins. in diam., bears N. 01° E., 25 lks. dist., mkd. ¼ S22 BT.

A juniper, 13 ins. in diam., bears S. 15° E., 19 lks. dist., mkd. ¼ S27 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 10 ins. in the ground to solid rock, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.

T2N R23E
¼ S22/S27

1964

Bury the original stone cor. in the mound, alongside the iron post.

The above cor. is set in the bottom of a draw, draining N.

S. 89° 39' W., beginning new measurement.

Asc. 290 ft. over an E. slope.

18.00 Spur, projects N.; desc. 255 ft. over a NW. slope.

40.57 The cor. of secs. 21, 22, 27 and 28.

Land, mountainous.
Soil, rocky clay.
Timber, dense to scattered juniper and pinon.
Undergrowth, medium dense sagebrush, buck brush and grass.

Dependent Resurvey of a portion of the Subdivision of T. 2 N., R. 23 E.

CHAINS	
	N. 0° 01' E., between secs. 21 and 22.
	Over mountainous land, through dense timber; desc. 100 ft. over a NW. slope.
6.00	Bottom of steep desc.; desc. gradually across broad hollow; enter dense willow.
15.50	Spring branch, drains NE. from S. 80° W.; spring bears S. 80° W., 10.50 chs. dist.
20.50	Little Davenport Creek, 3 ins. deep, 2 lks. wide, flows N. 30° E.; asc. 40 ft. along an E. slope; leave willows; enter dense juniper and pinon.
39.69	The ¼ sec. cor. of secs. 21 and 22, monumented with a sandstone, 23x11x8 ins., firmly set in the ground, and mkd. ¼ on the W. face.
	From which, the original bearing trees,
	A pinon, 15 ins. in diam., bears S. 28° E., 30 lks. dist., mkd. ¼ S22 BT.
	A pinon, 14 ins. in diam., bears S. 47° W., 27 lks. dist., mkd. ¼ S21 BT.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. in diam., 12 ins. in the ground, to solid rock, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.
	T2N R23E ¼ S21 | S22 1964
	Bury the original stone cor. in the mound, alongside the iron post.
	From the above cor. a house at the old Kelly ranch, bears N. 65° E., about 17.00 chs. dist. At one time the land, along the bottom of the canyon, had been cultivated and is now being used as a pasture.
	N. 0° 15' E., beginning new measurement.
	Asc. 80 ft. along an E. slope.
20.80	Spur, projects NE.; desc. 290 ft. over a broken N. slope.
40.56	The cor. of secs. 15, 16, 21 and 22, monumented with a sandstone, 24x10x10 ins., firmly set in the ground, and mkd. with 3 notches on the S. and E. edges.
	From which, the original bearing trees,
	A pinon, 7 ins. in diam., bears N. 65° 30' E., 65 lks. dist., mkd. T2N R23E S15 BT.

Dependent Resurvey of a Portion of the Subdivision of T. 2 N. R. 23 E.

CHAINS

A pinon, 9 ins. in diam., bears S. 9° E., 47 lks. dist., mkd. T2N R23E S22 BT.

A juniper, 8 ins. in diam., bears S. 69° 45' W., 23 lks. dist., mkd. T2N R23E S21 BT.

A pinon, 7 ins. in diam., bears N. 27° W., 31 lks. dist., mkd. T2N R23E S16 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 10 ins. in the ground, to solid rock, and in a mound of stone, 3½ ft. base, to top, with brass cap mkd.

T2N R23E
S16 | S15
S21 | S22

1964

Bury the original stone cor. in the mound, alongside the iron post.

The above cor. is set in the bottom of a draw, draining NE.

Land, mountainous.
Soil, rocky clay.
Timber, dense juniper and pinon, with aspen and pine along Little Davenport Creek.
Undergrowth, medium dense sagebrush, scattered service berry and grass.

From the cor. of secs. 14, 15, 22 and 23.

N. 89° 55' W., between secs. 15 and 22.

Over mountainous land, through dense timber; desc. 120 ft. over a NW. slope.

17.00 Slope changes to W.; desc. 275 ft.

25.70 Draw, drains NW.; thence along a N. slope.

35.00 Timber becomes scattered; desc. 20 ft. over a NW. slope.

40.02 The ¼ sec. cor. of secs. 15 and 22, monumented with a sandstone, 18x9x6 ins., firmly set in the ground, and mkd. ¼ on the N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 10 ins in the ground, to solid rock, and in a mound of stone, 5 ft. base, to top, with brass cap mkd.

T2N R23E
S15
¼ S22

1964

Bury the original stone cor. in the mound, alongside the iron post.

Dependent Resurvey of a Portion of the Subdivision of T. 2 N., R. 23 E.

CHAINS	
	S. 89° 48' W. beginning new measurement.
	Desc. 20 ft. over a NW. slope.
3.50	Little Davenport Creek, 3 ins. deep, 2 lks. wide, flows N. 15° E.; asc. 30 ft. over an E. slope.
6.50	Graded road bears NE. to Little Hole, and SW. to Vernal, Utah; asc. 60 ft. over an E. slope.
30.00	Top of rise; thence along a NW. slope through dense timber.
40.05	The cor. of secs. 15, 16, 21 and 22.
	Land, mountainous. Soil, rocky clay. Timber, scattered and dense juniper and pinon. Undergrowth, dense patches of sagebrush and grass, scattered service berry and buckbrush.
	N. 0° 02' E., between secs. 15 and 16.
	Over mountainous land, through dense timber; asc. 70 ft. over a SE. slope.
7.50	Spur, projects NE., natural gas pipeline, bears NE. and SW.; desc. 260 ft. over a NW. slope.
40.09	The ¼ sec. cor. of secs. 15 and 16, monumented with a sandstone, 20x12x6 ins., firmly set and mkd. ¼ on the W. face.
	From which, the original bearing trees,
	A pinon, 8 ins. in diam., bears S. 53° E., 27 lks. dist., mkd. ¼ S15 BT.
	A juniper, 9 ins. in diam., bears S. 20° 30' W., 63 lks. dist., mkd. ¼ S16 BT.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. in diam., 10 ins. in the ground, to solid rock, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.
	T2N R23E ¼ S16 | S15 1964
	Bury the original stone cor. in the mound alongside the iron post.
	N. 0° 19' W., beginning new measurement.
0.54	The meander cor. on the right bank of the Green River, monumented with a sandstone, 20x18x5 ins. firmly set in the ground, and mkd. MC on the N. and 3 grooves on the E. face. There is no remaining evidence of the original bearing trees.

Dependent Resurvey of a Portion of the Subdivision of T. 2 N., R. 23 E.

CHAINS

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 15 ins. in the ground, to solid rock, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.

M C
S16 | S15
T2N | R23E

1964

Bury the original stone cor. in the mound, alongside the iron post.

Land, mountainous.
Soil, rocky clay.
Timber, dense and scattered juniper and pinon.
Undergrowth, patches of dense sagebrush, scattered grass and buck brush.

From the cor. of secs. 32 and 33, on the S. bdy. of the Tp.

N. 0° 03' E., between secs. 32 and 33.

Over mountainous land, through dense timber; asc. 205 ft. over a S. slope.

11.10 Ridge, bears E. and W.; enter old burned area; desc. 830 ft. over a slope through second growth aspen and dense undergrowth.

39.86 The ¼ sec. cor. of secs. 32 and 33, monumented with a sandstone, 16x10x8 ins., firmly set in the ground, and mkd. ¼ on the W. face. There is no remaining evidence of the original bearing trees.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 12 ins. in the ground to solid rock, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.

T2N R23E
¼
S32 | S33

1964

Bury the original stone cor. in the mound alongside the iron post.

N. 0° 03' E., beginning new measurement.

Desc. 450 ft. over a N. slope.

27.00 Jeep road, bears NE. and SW.; desc. 95 ft. over a N. slope.

Dependent Resurvey of a Portion of the Subdivision of
T. 2 N., R. 23 E.

CHAINS	
36.50	Jeep road, bears E. and W.; desc. 60 ft. over a N. slope.
40.21	The cor. of secs. 28, 29, 32 and 33, monumented with a sandstone, 14x8x5 ins., firmly set in the ground, and mkd. with 1 notch on the S. and 4 notches on the E. edge. There is no remaining evidence of the original bearing trees. At the cor. point Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd. T2N R23E S29 | S28 S32 | S33 1964 Bury the original stone cor. below ground surface, alongside the iron post. Land, mountainous. Soil, rocky, clay loam. Timber, dense fir, pine and aspen, with second growth aspen in the burned area. Undergrowth, medium dense wild apple, service berry and buck brush.
	From the cor. of secs. 27, 28, 33 and 34. N. 89° 56' W., between secs. 28 and 33. Over mountainous land, through scattered timber and dense undergrowth, along a N. slope.
5.00	Slope changes to NE.; asc. 138 ft.
28.00	Slope changes to N.; asc. 40 ft.
39.22	The ¼ sec. cor. of secs. 28 and 33, monumented with a sandstone, 20x9x6 ins., firmly set in the ground, and mkd. ¼ on the N. face. At the cor. point Set an iron post, 30 ins. long, 2½ ins. in diam., 8 ins. in the ground to solid rock, and in a mound of stone, 3 ft. base, to top, with brass cap mkd. T2N R23E ¼ S28 S33 1964 Bury the original stone cor. in the mound alongside the iron post. S. 89° 57' W., beginning new measurement.

Dependent Resurvey of a Portion of the Subdivision of T. 2 N., R. 23 E.

CHAINS

Asc. 27 ft. along a N. slope.

10.00 Pole Corral, bears N. about 6.00 chs. dist.; asc. 10 ft. along a N. slope.

14.60 Top of rise; desc. 15 ft. along a NW. slope.

25.80 Junction of dirt roads bearing SE., NW. and N. 70° W.; desc. 30 ft. over a NW. slope.

40.01 The cor. of secs. 28, 29, 32 and 33.

Land, mountainous.
Soil, rocky clay.
Timber, scattered pine and pinon.
Undergrowth, dense sagebrush, scattered service berry and buck brush.

N. 0° 03' E., between secs. 28 and 29.

Over mountainous land through scattered timber and dense undergrowth; desc. 10 ft. along a NW. slope.

1.20 Little Davenport Creek, 1 in. deep, 2 lks. wide, flows N. 60° E., leave timber; asc. 45 ft. along a SE. slope.

7.00 Spur, projects NE.; desc. 158 ft. over a N. slope through scattered pine.

30.60 Leave timber, enter sagebrush covered hollow, drains E.

39.90 The ¼ sec. cor. of secs. 28 and 29, monumented with a sandstone, 16x10x8 ins., firmly set in the ground, and mkd. ¼ on the W. face. The original bearing trees have fallen and decayed.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.

T2N R23E
¼
S29 | S28
1964

Bury the original stone cor. below the ground surface, alongside the iron post.

Raise a mound of stone, 3 ft. base, 2½ ft. high, W. of the cor.

N. 0° 09' W., beginning new measurement.

3.50 Small wash, drains NE.

Dependent Resurvey of a Portion of the Subdivision of T. 2 N., R. 23 E.

CHAINS	
6.35	Natural gas pipeline, bears N. 28° 29' E. and S. 28° 29' W.; jeep road, parallels pipeline along W. side of pipeline. Asc. 15 ft. over a SE. slope.
11.30	Low spur, projects NE.; desc. 60 ft. over a NW. slope.
19.30	Draw, drains NE.; asc. 42 ft. over a SE. slope.
33.00	Spur, projects NE.; desc. 165 ft. over a steep broken NW. slope.
39.95	The cor. of secs. 20, 21, 28 and 29, monumented with a sandstone, 14x14x4 ins., firmly set in the ground, and mkd. with 2 notches on the S. and 4 notches on the E. edges. From which, the original bearing trees, A red pine, 24 ins. in diam., bears N. 16° E., 20 lks. dist., mkd. T2N R23E S21 BT. A red pine, 30 ins. in diam., bears N. 40° W., 25 lks. dist., mkd. T2N R23E S20 BT. At the cor. point Set an iron post, 30 ins. long, 2½ ins. in diam., 10 ins. in the ground to solid rock, and in a mound of stone, 3 ft. base, to top, with brass cap mkd. T2N R23E S20 | S21 S29 | S28 1964 Bury the original stone cor. in the mound alongside the iron post. Land, mountainous. Soil, rocky clay. Timber, patches of dense aspen, red pine, and scattered juniper and pinon. Undergrowth, patches of dense sagebrush, scattered choke cherry, service berry, buck brush and grass.
	From the cor. of secs. 21, 22, 27 and 28. N. 89° 45' W., between secs. 21 and 28. Over mountainous land, through widely scattered timber and dense undergrowth; desc. 45 ft. over a NW. slope.
4.60	Draw, drains N. 10° E.; asc. 185 ft. over a NE. slope.
11.50	Spur, projects N.; desc.190 ft. over a NW. slope.
20.30	Little Davenport Creek, 2 ins. deep, 2 lks. wide, flows N. 15° E.; asc. 355 ft. over an E. slope.
39.64	The ¼ sec. cor. of secs. 21 and 28, monumented with a sandstone, 16x10x6 ins., firmly set in the ground and mkd. ¼ on the N. face. The original bearing trees have been destroyed by fire.

Dependent Resurvey of a portion of the Subdivision of T. 2 N., R. 23 E.

CHAINS

At the cor. point.

Set an iron post, 30 ins. long, 2½ ins. in diam., 12 ins. in the ground, to solid rock, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.

T2N R23E
¼ S21/S28

1964

Bury the original stone cor. in the mound alongside the iron post.

S. 89° 44' W., beginning new measurement.

Asc. 60 ft. along a N. slope.

11.70 Small draw, drains NE.; asc. 50 ft. over a NE. slope.

16.70 Enter dense timber; asc. 50 ft. over a NE. slope.

22.63 Natural gas pipeline, along a draw draining NE., bears N. 28° 29' E., and S. 28° 29' W.; asc. 85 ft. over an E. slope.

34.00 E. rim of Gorge Creek Canyon, bears NE. and SW.; desc. 210 ft. over a ledgy NW. slope.

39.20 Ledge, 100 ft. high, faces NW.

39.73 The cor. of secs. 20, 21, 28 and 29.

Land, mountainous.
Soil, rocky clay.
Timber, scattered to dense juniper and pinon, patches of medium dense red pine and ponderosa pine.
Undergrowth, patches of dense sagebrush, scattered buck brush, choke cherry and grass.

N. 0° 09' W., between secs. 20 and 21.

Over mountainous land, through dense timber; desc. 10 ft. over a NW. slope.

1.20 Gorge Creek, 3 ins. deep, 2 lks. wide, flows NE.; asc. 240 ft. over a ledgy SE. slope.

7.10 W. rim of canyon, bears NE. and SW.; desc. 135 ft. along a NE. slope.

40.25 The ¼ sec. cor. of secs. 20 and 21, monumented with a sandstone, 22x8x4 ins., firmly set in a mound of stone, on solid rock, and mkd. ¼ on the W. face.

From which, an original bearing tree now dead,

CHAINS

A pine, 30 ins. in diam., bears S. 57° 45' E., 42 lks. dist.; mkd. ¼ S21 BT.

The other bearing tree is dead and fallen.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., over a cross (x) cut in solid rock, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.

T2N R23E
¼
S20 | S21

1964

Bury the original stone cor. in the mound alongside the iron post.

N. 0° 03' W., beginning new measurement.

Desc. 100 ft. over a gentle NE. slope, through scattered timber, and medium dense undergrowth.

40.05 The cor. of secs. 16, 17, 20 and 21, monumented with a sandstone, 20x8x4 ins., firmly set in a mound of stone and mkd. with 3 notches on the S. and 4 notches on the E. edges.

From which, the original bearing trees,

A pine 23 ins. in diam., bears N. 70° E., 1.55 chs. dist.; mkd. T2N R23E S16 BT.

A pinon, 18 ins. in diam., bears S. 60° E., 3.15 chs. dist.; mkd. T2N R23E S21 BT.

A pinon, 16 ins. in diam., bears N. 41° 45' W., 328 chs. dist.; mkd. T2N R23E S17 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., over a cross (x) cut in solid sandstone, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.

T2N R23E
S17 | S16
S20 | S21

1964

Bury the original stone cor. in the mound alongside the iron post.

The above cor. is set on the E. side of a low ledge facing E.

Dependent Resurvey of a Portion of the Subdivision of T. 2 N., R. 23 E.

CHAINS

Land, mountainous.
Soil, rocky clay.
Timber, scattered to dense pine, juniper and pinon.
Undergrowth, medium dense, sagebrush, buck brush, choke cherry and grass.

From the cor. of secs. 15, 16, 21 and 22.

N. 89° 59' W., between secs. 16 and 21.

Over mountainous land, through scattered timber and dense undergrowth; asc. 285 ft. over an E. slope.

19.00 Natural gas pipeline on spur, bears NE. and SW. irregularly; desc. 220 ft. over a broken NW. changing to W. slope.

28.50 Gorge Creek, 3 ins. deep, 2 lks. wide, flows NE.; asc. 290 ft. over a broken E. slope.

39.76 The ¼ sec. cor. of secs. 16 and 21, monumented with a sandstone, 18x8x3 ins., firmly set in the ground, mkd. ¼ on the N. face, and witnessed by a mound of stone N.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 6 ins. in the ground, to solid rock, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.

T2N R23E
¼ S16/S21

1964

Bury the original stone cor. in the mound alongside the iron post.

Rebuild the mound of stone, N., 3 ft. base, 3 ft. high.

N. 89° 57' W., beginning new measurement.

Asc. 65 ft. over a NE. slope.

8.20 Spur, projects NE.; thence along a N. slope..

27.90 Hollow, drains NE.; asc. 145 ft. over a NE. slope.

40.02 The cor. of secs. 16, 17, 20 and 21.

Land, mountainous.
Soil, rocky clay.
Timber, scattered pine, juniper and pinon.
Undergrowth, patches of dense sagebrush, medium dense buck brush, and grass.

Dependent Resurvey of a Portion of the Subdivision of T. 2 N., R. 23 E.

CHAINS	
	N. 0° 07' W., between secs. 16 and 17.
	Over mountainous land, through scattered timber and medium dense undergrowth; desc. 140 ft. over a NE. changing to N. slope.
18.00	Draw, drains NE.; desc. 145 ft. over a NE. slope.
26.90	Gully drains NE.; desc. 138 ft. along a NE. changing to a N. slope.
39.64	The ¼ sec. cor. of secs. 16 and 17, monumented with a sandstone, 23x15x7 ins., firmly set in the ground, and mkd. ¼ on the W. face, and witnessed by a mound of stone, W.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. in diam., 8 ins. in the ground, to solid rock, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.
	T2N R23E ¼ S17|S16 1964
	Bury the original stone cor. in the mound, alongside the iron post.
	Rebuild the mound W., 3 ft. base, 3 ft. high.
	N. 0° 18' W., beginning new measurement.
	Desc. 310 ft. over a broken N. slope.
14.00	Enter dense timber; desc. 125 ft. over a N. slope.
20.50	The point for meander cor. of secs. 16 and 17, on the right bank of the Green River, determined from the original bearing trees,
	A pinon, 15 ins. in diam., bears S. 41° E., 19 lks. dist., mkd. T2N R23E S16 MC BT.
	A pinon, 16 ins. in diam., bears S. 61° W., 99 lks. dist., mkd. T2N R23E S17 MC BT.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. in diam., over a cross (x) cut on solid rock, and in a mound of stone, 5 ft. base, to top, with brass cap mkd.
	MC S17|S16 T2N R23E 1964

Dependent Resurvey of a Portion of the Subdivision of T. 2 N., R. 23 E.

CHAINS

Land, mountainous.
Soil, rocky clay.
Timber, scattered to dense juniper and pinon, with some pine.
Undergrowth, medium dense sagebrush, buck brush and grass.

Subdivision of Sec. 15, T. 2 N., R. 23 E.

From the ¼ sec. cor. of secs. 15 and 22

N. 0° 06' E., along the N. and S. centerline of sec. 15.

Desc. gradually over a NW. slope.

7.50 Little Davenport Creek, 3 ins. deep, 2 lks. wide, flows N. 30° E.; desc. along a NE. slope.

31.21 Point for a special meander cor. on the present right bank of the Green River.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground to solid rock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T2N R23E
SMC
C
S | 15
C
1967

MEANDERS OF ISLANDS

At a point N. 21° 21' W., 3.82 chs. from the SMC on the centerline of sec. 15, point selected for an auxiliary meander cor. on a small island in sec. 15.

Set an iron post 30 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone with brass cap mkd.

T2N R23E
AMC
S15
1967

Thence with the meanders of the island:

N. 6° 33' E., 2.32 chs.

Meanders of Islands In Township 2 N., Range 23 E.

CHAINS

N. 49° 17' E., 3.31 chs.
S. 34° 46' E., 3.66 chs.
S. 17° 24' E., 3.75 chs.
S. 71° 37' W., 2.08 chs.
N. 55° 19' W., 4.87 chs. to point of beginning.

At a point N. 26° 17' W., 9.12 chs. from the SMC on the centerline of sec. 15, point selected for an auxiliary meander cor. on a small island in sec. 15.

Set an iron post 30 ins. long, 2½ ins. diam., 20 ins. in the ground and in a collar of stone to top with brass cap mkd.

T2N R23E
AMC
S15
1967

Thence with the meanders of the island:

N. 76° 45' E., 3.87 chs.
N. 38° 00' W., 8.96 chs.
S. 87° 00' W., 5.80 chs.
S. 12° 47' E., 6.88 chs.
S. 81° 14' E., 6.08 chs. to point of beginning.

Meanders of Right Bank of the
Green River, T. 2 N., R. 23 E.

From the meander cor. of secs. 16 and 17, on the right bank of the Green River, previously described.

Thence downstream with the meanders of the right bank of the river, in sec. 16, with mountainous land to right of meander line, along a well-defined bank, through dense timber.

N. 55° 00' E., 1.63 chs.
N. 79° 00' E., 5.40 chs.
S. 81° 00' E., 5.76 chs.
S. 63° 30' E., 8.39 chs.
S. 59° 00' E., 4.33 chs.
S. 55° 15' E., 3.05 chs.
S. 35° 15' E., 5.74 chs.
S. 55° 45' E., 28.58 chs. At 8.00 chs. on this course, small spring of good water.

N. 86° 00' E., 10.08 chs.
N. 61° 00' E., 2.55 chs.
N. 65° 15' E., 11.09 chs. At end of course, beginning of nearly level river bottom land.

Meanders of the Right Bank of the Green River, T. 2 N., R. 23 E.

CHAINS

N. 75° 04' E., 4.81 chs. At 2.00 chs., Gorge Creek, [illegible] ins. deep, 2 lks. wide, flows north into river. At 4.81 chs., the meander cor. of secs. 15 and 16.

Land, steep mountainous to river's edge.
Soil, rocky, sandy clay.
Timber, dense pine, juniper and pinon.
Undergrowth, willows, sagebrush, serviceberry and grass.

Thence in sec. 15

With bottom land to right of meander line, through scattered undergrowth.

N. 32° 15' E., 3.54 chs.
N. 64° 30' E., 3.70 chs.
N. 83° 45' E., 13.12 chs.
S. 87° 23' E., 5.78 chs.
S. 85° 21' E., 3.49 chs.
S. 10° 21' E., 1.17 chs.
S. 15° 00' W., 3.96 chs.
S. 76° 00' E., 11.28 chs.
S. 2° 00' W., 3.59 chs.
S. 34° 37' E., 4.12 chs. The special meander cor. on the N-S center line of sec. 15, previously described.

S. 88° 31' E., 8.15 chs. At end of course, Little Davenport Creek flows N. 30° E. into river. Leave bottom land, beginning ledgy river bank and dense timber.

S. 64° 29' E., 8.73 chs.
N. 65° 25' E., 20.17 chs.
N. 47° 37' E., 7.74 chs. The meander cor. of secs. 14 and 15.

Land, river bottom the first 57.70 chs., mountainous the balance.
Soil, sandy to rocky clay.
Timber, none the first 57.70 chs., dense juniper and pinon the balance.
Undergrowth, medium willows and grass on the bottom land, scattered buck brush and serviceberry the mountainous portion.

Thence in sec. 14

Along ledgy river bank, with dense timber along right side of meander line.

N. 25° 15' E., 3.44 chs.

N. 39° 30' E., 3.34 chs.

N. 46° 15' E., 10.71 chs.

Meanders of Right Bank of the Green River, T. 2 N., R. 23 E.

CHAINS

N. 44° 30' E., 9.02 chs.

N. 69° 45' E., 3.32 chs. At end of course, beginning of bottom land to right of meander line.

N. 86° 00' E., 6.20 chs.

S. 83° 00' E., 4.77 chs.

S. 63° 45' E., 3.93 chs.

S. 49° 00' E., 4.89 chs.

S. 71° 30' E., 6.93 chs.

S. 56° 00' E., 12.27 chs. At end of course, end of bottom land, beginning of ledges along river bank.

N. 77° 30' E., 5.47 chs.

N. 61° 30' E., 6.07 chs.

N. 79° 45' E., 2.19 chs.

N. 84° 15' E., 8.15 chs.

S. 87° 35' E., 3.90 chs. The meander cor. of secs. 13 and 14.

Land, mountainous.
Soil, sandy loam, and ledgy rocky clay.
Timber, pine, juniper and pinon.
Undergrowth, willows, sagebrush, grass and weeds.

Thence in sec. 13.

With mountainous land to right of meander line, along a ledgy bank, with dense timber.

N. 77° 00' E., 8.50 chs. At 7.50 chs. on this course, Jackson Creek, dry, drains north into river.

N. 82° 00' E., 7.10 chs.

S. 79° 00' E., 3.00 chs.

S. 76° 00' E., 3.30 chs.

S. 63° 00' E., 8.80 chs.

S. 83° 00' E., 5.60 chs.

N. 73° 30' E., 7.50 chs.

S. 87° 00' E., 3.60 chs.

S. 72° 30' E., 1.90 chs.

Meanders of Right Bank of the Green River, T. 2 N., R. 23 E.

CHAINS

S. 49° 30' E., 4.40 chs.

S. 33° 15' E., 9.30 chs.

S. 55° 15' E., 22.30 chs.

S. 41° 09' E., 7.50 chs. The meander cor. of secs. 13 and 18, on the E. bdy. of the Tp., monumented with an iron post, 2½ ins. in diam., as described in the 1963 record of the resurvey of W. bdy., T. 2 N., R. 24 E.

Land, mountainous.
Soil, rocky clay.
Timber, dense pine, pinon and juniper.
Undergrowth, scattered willows, serviceberry, buck brush and grass.

General Description

A considerable variety of land and soil is found in Township 2 North, Range 23 East. The general elevation of the township ranges from about 5,500 ft. above sea level along the Green River, to about 8,000 ft. above sea level along the south boundary of the township. Most of the township is rough, broken mountains. The soil is a rocky clay, on the steep slopes, and a rocky sandy clay on the gentler slopes or bench lands, with an alluvial silt and sandy loam in the bottom lands along the Green River. There is a dense to scattered growth of pinon and juniper, with patches of aspen and pine timber over most of the township. The Green River enters the portion of the township resurveyed 21.00 chs. north of the 1/4 sec. cor. of secs. 16 and 17, flowing easterly and leaves the township 22.00 chs. north of the closing cor. of secs. 13 and 24 on the east boundary. The drainage of the portion of the township resurveyed is in a northerly direction into the Green River. The township is accessible by an improved dirt road from Vernal, Utah, to the Little Hole crossing of the Green River. A number of small springs and streams of good water were noted throughout the township. There is one permanent habitation, the old Kelly Ranch, located in the western portion of sec. 22.

Form 9180-8
(August 1967)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS

NAMES	CAPACITY
Gerald W. Hochstrasser	Principal Assistant
Stephen L. Petersen	Instrumentman
H. Dennis Badger	Notekeeper, Chainman
Chad M. Smith	Chainman
David E. Lund	Flagman
Kimball U. Lewis	Cornerman

CERTIFICATE OF SURVEY

I, We, Fred R. Chappell and Glen B. Hatch, HEREBY CERTIFY upon honor that,

in pursuance of special instructions bearing date of the 25 day of May, 1962, and supplemental special instructions dated January 10, 1967, we have dependently resurveyed a portion of the south boundary and a portion of the subdivisional lines and surveyed a portion of the present meander lines of the Green River and islands in section 15, T. 2 N., R. 23 E.

of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

September 14, 1969
(Date)

Glen B Hatch
(Cadastral Surveyor)
Supervisory

March 12, 1965
(Date)

Fred R. Chappell
(Cadastral Surveyor)
Supervisory

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT,
Washington, D. C.

The foregoing field notes of the dependent resurvey of a portion of the south boundary and a portion of the subdivisional lines and the survey of a portion of the present meander lines of the Green River and islands in sec. 15, T. 2 N., R. 23 E., Salt Lake Meridian, Utah.

executed by Fred R. Chappell and Glen B. Hatch, Supervisory Cadastral Surveyor, having been critically examined and found correct, are hereby approved.

(Date)

Thomas A. Tillman
~~(Chief, Division of Engineering)~~
Chief, Division of Cadastral Survey

CERTIFICATE OF TRANSCRIPT

~~I CERTIFY That the foregoing transcript of the field notes of the above-described surveys in~~

, is a true copy of the original field notes.

~~(Date)~~ ~~(Chief, Division of Engineering)~~

Blank

Page

Blank

Page

Form 9180-6
(April 1965)
(formerly 4-679)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

441

ORIGINAL

FIELD NOTES

OF THE

DEPENDENT RESURVEY

OF

THE THIRD STANDARD PARALLEL NORTH,

(SOUTH BOUNDARY) THE WEST, NORTH AND EAST BOUNDARIES

AND THE

SUBDIVISIONAL LINES

OF

TOWNSHIP 13 NORTH, RANGE 10 WEST

Of the SALT LAKE Meridian,

In the State of UTAH.

EXECUTED BY

FRED R. CHAPPELL SUPERVISORY CADASTRAL SURVEYOR

Under special instructions dated FEBRUARY 20, 19 67, which provided for the surveys included under Group Number 491, approved FEBRUARY 24, 1967, and assignment instructions dated MAY 26, 19 67.

Survey commenced JULY 30, 19 67

Survey completed NOVEMBER 15, 19 67

INDEX DIAGRAM

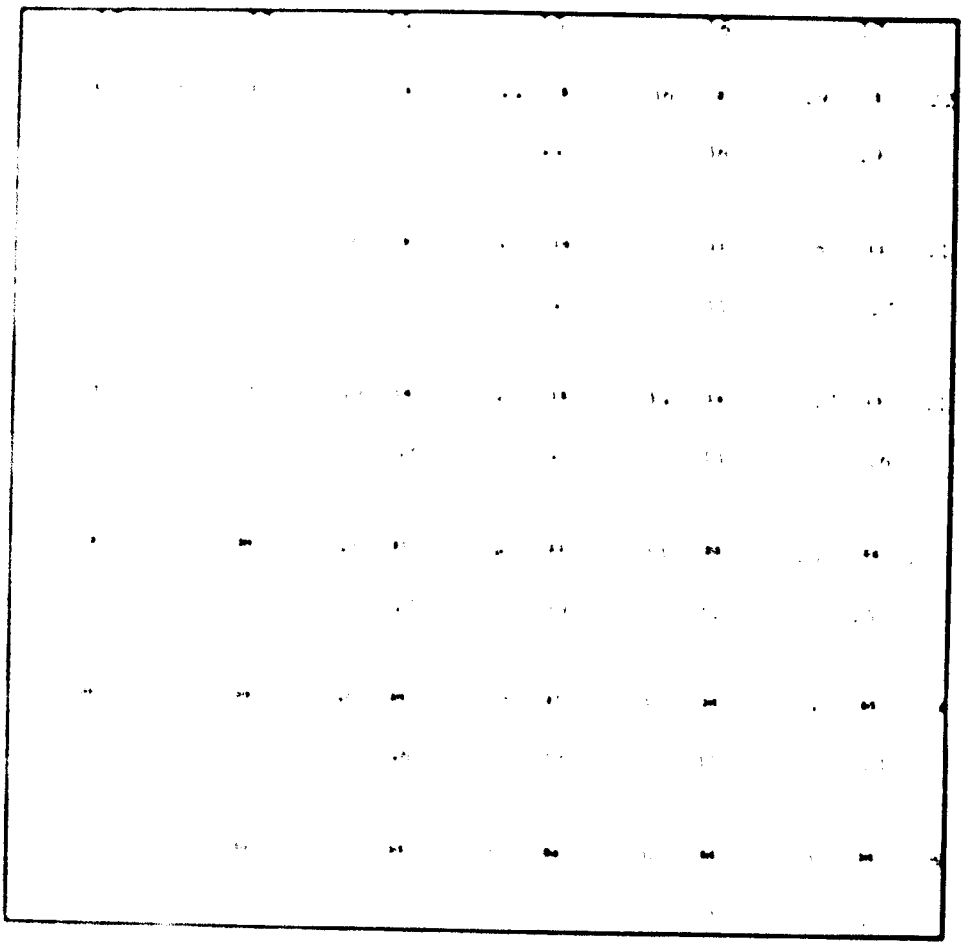

Dependent Resurvey, Township 13 North, Range 10 West

CHAINS

The Third Standard Parallel North (South Boundary), and the south 1 and ¼ miles of the West Boundary were surveyed by Joseph Gorlinski in 1871. The East Boundary was surveyed by G.V.M. Boutelle in 1872. The North Boundary was surveyed by G.V.M. Boutelle in 1873. In 1886, E. Wilkes and C. Betts surveyed the N. 4½ miles of the West Boundary and resurveyed the south 1 and ½ miles. A portion of the subdivisional lines were surveyed by G.V.M. Boutelle in 1873 and in 1886 E. Wilkes and C. Betts completed the survey of the subdivisional lines. The following field notes are those of the dependent resurvey of the Third Standard Parallel North (South Boundary), the west, north and east boundaries and the subdivisional lines of Township 13 North, Range 10 West.

The resurvey was initiated on the official request of the District Manager, Salt Lake District, Bureau of Land Management because of the multiple use and the intermingled land pattern.

The survey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions 1947, and the special instructions dated February 20, 1967.

Before restoring the corners, the lines of the original survey were retraced and a diligent search made for any evidence of the original corners and any calls of the original field note record. When duly identified, the corner positions were remonumented.

The rules of proportionate measurement were applied in order to ascertain the position of lost corners after completing the necessary retracements to connect with the identified corner locations, but not until exhausting every reasonable possibility of finding direct evidence for the control of each particular corner.

The direction of the lines of this survey were determined by the solar transit method.

The length of the lines were determined by chaining.

The geographic position for the southeast corner of the township is at Latitude 41° 48' 17.1" N. and Longitude 112° 55' 12.6" W., as computed from section line ties made to U.S.G.S. triangulation station HARDUP at Latitude 41° 50' 04.445" N. and Longitude 113° 01' 52.390" W., located N. 75° 28' W. 15.36 chs. distance from the ¼ sec. cor. of secs. 19 and 30, T. 13 N., R. 10 W.

The magnetic declination was read at a number of stations throughout the survey and the average of the several readings was found to be N. 17° 15' E.

Dependent Resurvey of the Third Standard Parallel North (South Boundary) of T. 13 N., R. 10 W.

Dependent Resurvey of the Third Standard Parallel North,
(South Boundary of Township 13 North, [illegible] 10 West)

CHAINS

Reestablishment of the Survey Executed by
Joseph Gorlinski, Deputy Surveyor in 1883.

Point for the standard cor. of Tps. 13 N., Rs. 9 and 10 W., at proportionate distance; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.

SC
T13N
R10W R9W
S36|S31
T12N
1967

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.

From the above cor., the standard cor. of secs. 31 and 32, T. 13 N., R. 9 W., monumented with a limestone, 10x10x6 ins. above ground and mkd. with 5 notches on the E. and 1 notch on the W. face, bears S. 89° 25' E., 81.46 chs. distance.

N. 89° 25' W., along the S. bdy. of sec. 36.

Over level desert land through medium dense undergrowth.

40.73 Point for the standard ¼ sec. cor. of sec. 36 at proportionate distance; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.

SC
T13N R10W
¼ S36
T12N
1967

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.

45.96 Barbed wire fence, bears N. 11° W. and S. 11° E.

53.45 Wash, 8 lks. wide, 2 ft. deep, drains S. 34° E.

81.46 The standard cor. of sec. 35 and 36, monumented with a wood post, 4 ft. long, 4 ins. squared, set in a mound of earth and stone and mkd. with 1 notch on the E. and 5 notches on the W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.

Dependent Resurvey of the Third Standard Parallel North,
(South Boundary of Township 13 North, Range 10 West)

CHAINS	
	SC T13N R10W S35|S36 T12N 1967 Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post. Reset the original cor. alongside the iron post. Land, level desert. Soil, sandy clay. No timber. Undergrowth, medium dense sagebrush and shadscale.
	S. 89° 45' W., along the S. bdy. of sec. 35. Over nearly level desert land through medium dense undergrowth.
40.07	Point for the standard ¼ sec. cor. of sec. 35 at proportionate distance; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd. SC T13N R10W ¼S35 T12N 1967
43.15	Trail road, bears S. 29° W. and N. 29° E.
49.40	Swale, drains S. 40° W.
61.80	Swale, drains S. 40° W.
80.14	Point for the standard cor. of secs. 34 and 35 at proportionate distance; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd. SC T13N R10W S34|S35 T12N 1967 Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post. Land, nearly level desert. Soil, sandy clay. No timber. Undergrowth, medium dense sagebrush and shadscale.
	S. 89° 45' W., along the S. bdy. of sec. 34.

Dependent Resurvey of the Third Standard Parallel North,
(South Boundary of Township 13 North, Range 10 West)

CHAINS	
	Over nearly level desert land through medium dense undergrowth.
19.05	Trail road, bears S. 10° W. and N. 10° E.
40.07	Point for the standard ¼ sec. cor. of sec. 34 at proportionate distance; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd. SC T13N R10W ¼S34 T12N 1967 Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.
43.65	Trail road, bears irregularly S. 20° E. and N. 20° W.
80.14	Point for the standard cor. of secs. 33 and 34 at proportionate distance; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd. SC T13N R10W S33 | S34 T12N 1967 Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post. Land, nearly level desert. Soil, sandy clay. No timber. Undergrowth, medium dense sagebrush and shadscale.
	S. 89° 45' W., along the S. bdy. of sec. 33. Over nearly level desert land through medium dense undergrowth.
23.50	Trail road, bears S. 80° E. and N. 80° W.
40.07	Point for the standard ¼ sec. cor. of sec. 33 at proportionate distance; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd. SC T13N R10W ¼S33 T12N 1967

Dependent Resurvey of the Third Standard Parallel North,
(South Boundary of Township 13 North, Range 10 West)

CHAINS	
	Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.
80.14	Point for the standard cor. of secs. 32 and 33 at proportionate distance; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd. SC T13N R10W S32|S33 T12N 1967 Land, nearly level desert. Soil, sandy clay. No timber. Undergrowth, medium dense sagebrush and shadscale.
	S. 89° 45' W., along the S. bdy. of sec. 32. Over nearly level desert land through medium dense undergrowth.
7.80	Trail road, bears S. 15° W. and N. 15° E.
29.55	Trail road, bears S. 30° W. and N. 30° E.
40.07	The standard ¼ sec. cor. of sec. 32, monumented with a limestone, 24x18x12 ins., firmly set in the ground and mkd. ¼ on the N. face. At the cor. point Set an iron post, 30 ins. long, 2½ ins. in diam., 20 ins. in the ground and in a collar of stone, with brass cap mkd. SC T13N R10W ¼S32 T12N 1967 Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post. Bury the original cor. alongside the iron post. ——————— N. 89° 57' W., beginning new measurement. Asc. 140 ft. along a SE. slope.
35.00	East side of top of spur projecting S.; thence across spur.
40.33	The standard cor. of secs. 31 and 32, monumented with a conglomerate stone, 20x10x5 ins., firmly set in the ground and mkd. with 1 notch on the W. and 5 notches on the E. face.

CHAINS	
	At the cor. point Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd. SC T13N R10W S31|S32 T12N 1967 Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post. Bury the original cor. alongside the iron post. The above cor. is set on the W. side of the top of spur, projecting S. Land, nearly level and gently rolling desert. Soil, sandy clay. No timber. Undergrowth, medium dense sagebrush and shadscale.
	S. 89° 59' W., along the S. bdy. of sec. 31. Over gently rolling land through medium dense undergrowth.
41.61	Point for the standard ¼ sec. cor. of sec. 31 at proportionate distance; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd. SC T13N R10W ¼ S31 T12N 1967 Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.
57.90	Trail road, bears S. 25° W. and N. 25° E.
65.85	Trail road, bears irregularly N. and S.
83.22	The standard cor. of Tps. 13 N. Rs. 10 and 11 W., monumented with a wood stake, 2 ft. long, 3 ins. square, set in a small mound of earth and stone; the cor. is partially decayed, but with enough remaining mks. to identify. At the cor. point Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd. SC T13N R11W R10W S36|S31 T12N 1967

Dependent Resurvey of the Third Standard Parallel North,
(South Boundary of Township 13 North, Range 10 West)

CHAINS

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.

Reset the original cor. alongside the iron post.

Land, gently rolling desert.
Soil, sandy clay.
No timber.
Undergrowth, medium dense sagebrush and shadscale.

Dependent Resurvey of the West Boundary,
T. 13 N., Rs. 10 and 11 W.

Reestablishment of the Survey Executed By E. Wilkes and C. Betts, Deputy Surveyors in 1886.

The cor. of Tps. 13 and 14 N., Rs. 10 and 11 W., monumented with a cedar post, 4 ft. long, 4 ins. square set 3 ft. in the ground and mkd. with 6 notches on all 4 edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.

T14N
R11W R10W
S36 | S31
S1 | S6
T13N
R11W R10W
1967

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.

Reset the original cor. alongside the iron post.

The above cor. is set on the E. side of a dirt road bearing N. and S.

S. 0° 5' E., bet. secs. 1 and 6.

Over nearly level desert land through medium dense undergrowth.

28.85 Trail road, bears S. 45° E. and N. 45° W.

39.45 Trail road, bears irregularly S. 50° W. and N. 50° E.

40.33 Point for the ¼ sec. cor. of secs. 1 and 6, at proportionate distance; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.

CHAINS

T13N
R11W R10W
¼
S1|S6
1967

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.

The above cor. is set on E. side of dirt road bearing N. and S.

77.50 Trail road, bears irregularly E. and W.

80.66 Point for the cor. of secs. 1, 6, 7 and 12 at proportionate distance; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. in diam., 22 ins. in the ground and in a collar of stone, with brass cap mkd.

T13N
R11W R10W
S1|S6
S12|S7
1967

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.

Land, nearly level desert.
Soil, sandy clay.
No timber.
Undergrowth, medium dense sagebrush and shadscale.

S. 0° 05' E., bet. secs. 7 and 12.

Over nearly level desert land, through medium dense undergrowth.

40.33 Point for the ¼ sec. cor. of secs. 7 and 12, at proportionate distance; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground and in a collar of stone, with brass cap mkd.

T13N
R11W R10W
¼
S12|S7
1967

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.

64.50 Trail road, bears S. 1° W. and N. 1° E.

75.60 Trail road, bears S. 88° W. and N. 88° E.

80.66 Point for the cor. of secs. 7, 12, 13 and 18 at proportionate distance; there is no remaining evidence of the original cor.

CHAINS

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground and in a collar of stone, with brass cap mkd.

T13N
R11W R10W

S12	S7
S13	S18

1967

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.

Land, gently rolling and nearly level desert.
Soil, sandy clay.
No timber.
Undergrowth, medium dense sagebrush and shadscale.

S. 0° 05' E., bet. secs. 13 and 18.

Over rolling desert land through medium dense undergrowth; asc. 105 ft. over a gentle N. slope.

40.33 Point for the ¼ sec. cor. of secs. 13 and 18 at proportionate distance; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. in diam., 12 ins. in the ground to solid rock and in a mound of stone, 4½ ft. base to top, with brass cap mkd.

T13N
R11W R10W

	¼
S13	S18

1967

Asc. 145 ft. over a gentle N. slope.

67.00 Trail road bears N. 30° E. and S. 05° W.; slope changes to W.

80.66 Point for the cor. of secs. 13, 18, 19 and 24 at proportionate distance; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. in diam., 20 ins. in the ground and in a mound of stone, 3½ ft. base to top, with brass cap mkd.

T13N
R11W R10W

S13	S18
S24	S19

1967

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.

Land, gently rolling desert.
Soil, rocky clay.
No timber.
Undergrowth, medium dense sagebrush and shadscale.

Dependent Resurvey, W. Bdy., T. 13 N., R. 10 W.

CHAINS	
	S. 0° 05' E., bet. secs. 19 and 24.
	Over rolling desert land through medium dense undergrowth.
29.50	Spur, projects N. 40° W.; desc. 50 ft. over a SW. slope to cor.
31.15	Trail road, bears S. 73° W. and N. 73° E.
34.54	Wash, 45 lks. wide, 6 ft. deep, drains irregularly W.
40.33	Point for the ¼ sec. cor. of secs. 19 and 24, at proportionate distance; there is no remaining evidence of the original cor.
	Set an iron post, 30 ins. long, 2½ ins. in diam., 4 ins. in the ground to solid rock and in a mound of stone, 5½ ft. base to top, with brass cap mkd.
	T13N R11W R10W ¼ S24|S19 1967
	Desc. 90 ft. over a SW. slope through medium dense timber.
55.00	Swale drains N. 50° W.; asc. 75 ft. over a N. slope.
80.66	The cor. of secs. 19, 24, 25 and 30, monumented with a sandstone, 36x10x6 ins., firmly set in the ground and mkd. with 2 notches on the S. and 4 notches on the N. edge.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. in diam., 4 ins. in the ground, to solid rock and in a mound of stone, 6 ft. base to top, with brass cap mkd.
	T13N S24|S19 S25|S30 1967
	Set a steel fence post, 6 ft. long, 2 ft. in the mound and ground, alongside the iron post.
	Bury the original cor. in the mound alongside the iron post.
	The above cor. is set on top of a hill bearing E. and N. 70° W.
	Land, desert mountains. Soil, rocky clay. Timber, medium dense juniper, the last ½ mile. Undergrowth, medium dense sagebrush and grass.

CHAINS

S. 0° 03' E., bet. secs. 25 and 30.

Over desert mountain land through medium dense timber; desc. 275 ft. over a broken SW. slope.

21.50 Base of steep slope; desc. 70 ft. over a gentle SW. slope; leave timber.

40.35 Point for the ¼ sec. cor. of secs. 25 and 30 at proportionate distance; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.

T13N
R11W R10W
¼
S25 | S30
1967

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.

Reestablishment of the survey executed by J. Gorlinski, Deputy Surveyor in 1871 and resurveyed by E. Wilkes and C. Betts, Deputy Surveyors, in 1886.

41.85 Trail road, bears irregularly E. and W.

65.90 Wash, 15 lks. wide, 2 ft. deep, drains S. 35° W.

70.40 Trail road, bears S. 25° E. and N. 25° W.

80.70 The cor. of secs. 25, 30, 31 and 36, monumented with a sandstone, 12x12x7 ins., firmly set in the ground and mkd. with 1 notch on the S. and 5 notches on the N. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.

T13N
R11W R10W
S25 | S30
S36 | S31
1967

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.

Land, mountainous and nearly level desert.
Soil, rocky and sandy clay.
Timber, medium dense juniper the first ½ mile.
Undergrowth, scant sagebrush and shadscale.

Dependent Resurvey, W. Bdy. T. 13 N., R. 11 W.

CHAINS

S. 0° 06' E., bet. secs. 31 and 36.

Over desert land sloping gently to the SW. through scant undergrowth.

40.30 Point for the ¼ sec. cor. of secs. 31 and 36 at proportionate distance; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.

T13N
R11W R10W
¼
S36 | S31
1967

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.

80.60 The standard cor. of Tps. 13 N., Rs. 10 and 11 W., hereinbefore described.

Land, nearly level desert land.
Soil, sandy clay.
No timber.
Undergrowth, scant shadscale.

Dependent Resurvey of the North Boundary, T. 13 N., R. 10 W.

Reestablishment of the Survey Executed by G.V.M. Boutelle Deputy Surveyor in 1873.

From the cor. of Tps. 13 and 14 N., Rs. 10 and 11 W., monumented with an iron post, 2½ ins. in diam., hereinbefore described.

N. 89° 52' E., bet. secs. 6 and 31.

Over nearly level desert land through medium dense undergrowth.

40.02 The ¼ sec. cor. of secs. 6 and 31, monumented with a white flintstone, 16x8x6 ins., firmly set in the ground and mkd. ¼ on the N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.

T14N R10W
¼ S31
S6
T13N
1967

Dependent Resurvey, N. Bdy., T. 13 N., R. 10 W.

CHAINS	
	Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post. Bury the original cor. alongside the iron post.
	N. 89° 52' E., beginning new measurement.
16.50	Wash, 20 lks. wide, 2 ft. deep, drains N. 40° W.
28.25	Bladed dirt road, bears S. 60° W. and N. 60° E.
40.06	The cor. of secs. 5, 6, 31 and 32, monumented with a white flintstone, 18x12x8 ins., firmly set in the ground and mkd. with 1 notch on the W. and 5 notches on the E. face. At the cor. point Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd. T14N R10W S31 | S32 S6 | S5 T13N 1967 Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post. Bury the original cor. alongside the iron post. Land, nearly level desert. Soil, sandy clay. No timber. Undergrowth, medium dense sagebrush, scant shadscale.
	N. 89° 54' E., bet. secs. 5 and 32. Over rolling desert land through medium dense undergrowth.
12.80	Top of rise; desc. 70 ft. over a gentle E. slope.
38.70	Small spring, bears South 75 lks. distance.
40.07	Point for the ¼ sec. cor. of secs. 5 and 32, at proportionate distance; the original cor. a quartz stone, 26x18x6 ins., mkd. ¼ was found lying loose on the ground. Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd. T14N R10W ¼ S32 S5 T13N 1967 Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.

CHAINS	
42.50	Wash, 10 lks. wide, 1 ft. deep, drains irregularly S.
69.10	Trail road, bears N. 30° W. and S. 30° E.;
80.14	The cor. of secs. 4, 5, 32 and 33, monumented with a flintstone, 14x10x5 ins., firmly set in the ground and mkd. with 2 notches on the W. and 4 notches on the E. edge (record calls for a flintstone, 21x14x9 ins.). At the cor. point Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground and in a collar of stone, with brass cap mkd. T14N R10W S32 | S33 S5 | S4 T13N 1967 Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post. Bury the original cor. alongside the iron post. Land, rolling desert. Soil, sandy clay. No timber. Undergrowth, medium dense sagebrush, scant grass, weeds and shadscale.
	N. 89° 48' E., bet. secs. 4 and 33. Over gently rolling desert land through medium dense undergrowth, along the N. side of a trail road.
9.30	Wash, 8 lks. wide, 2 ft. deep, drains N. 30° E.
33.30	Wash, 15 lks. wide, 2 ft. deep, drains S. 40° E.
34.80	Wash, 10 lks. wide, 2 ft. deep, drains S. 40° E.
40.02	The ¼ sec. cor. of secs. 4 and 33, monumented with a sandstone, 12x8x3 ins., firmly set in the ground and mkd. ¼ on the N. face (record a sandstone, 16x12x7 ins.) At the cor. point Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd. T14N R10W ¼ S33 S4 T13N 1967 Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.

Dependent Resurvey, N. Bdy., T. 13 N., R. 10 W.

CHAINS

Bury the original cor. alongside the iron post.

N. 89° 48' E., beginning new measurement.

40.06 The cor. of secs. 3, 4, 33 and 34, monumented with a sandstone, 14x11x6 ins., firmly set in the ground and mkd. with 3 notches on the E. and W. edges.

At the cor. point

Set an iron post, 30 ins. long, 24 ins. in the ground and in a collar of stone, with brass cap mkd.

T14N R10W

S33	S34
S4	S3

T13N
1967

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.

Bury the original cor. alongside the iron post.

Land, gently rolling desert.
Soil, sandy clay.
No timber.
Undergrowth, medium dense sagebrush, scant shadscale, grass and weeds.

N. 89° 50' E., bet. secs. 3 and 34.

Over nearly level desert land through medium dense undergrowth.

25.50 Trail road, bears irregularly N. and S.

40.11 The ¼ sec. cor. of secs. 3 and 34, monumented with a quartzite stone, 10x6x4 ins., firmly set in the ground and mkd. ¼ on the N. face (record a sandstone 11x10x9 ins.).

At the cor. point

Set an iron post, 30 ins. long 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.

T14N R10W

¼ S34 / S3

T13N
1967

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.

Bury the original cor. alongside the iron post.

CHAINS

N. 89° 46' E., beginning new measurement.

35.15 Trail road, bears irregularly N. and S.

40.07 The cor. of secs. 2, 3, 34 and 35, monumented with a flintstone, 18x12x11 ins., firmly set in the ground and mkd. with 2 notches on the E. and 4 notches on the W. edge.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.

T14N R10W
S34 | S35
S3 | S2
T13N
1967

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.

Bury the original cor. alongside the iron post.

Land, nearly level desert.
Soil, sandy clay.
No timber.
Undergrowth, medium dense sagebrush and shadscale.

S. 89° 50' E., bet. secs. 2 and 35.

Over nearly level desert land through medium dense undergrowth.

39.95 The ¼ sec. cor. of secs. 2 and 35, monumented with a sandstone, 14x8x7 ins., firmly set in the ground and mkd. ¼ on the N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.

T14N R10W
¼ S35
S2
T13N
1967

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.

Bury the original cor. alongside the iron post.

N. 89° 44' E., beginning new measurement.

40.18 The cor. of secs. 1, 2, 35 and 36, monumented with a sandstone, 12x8x6 ins., firmly set in the ground and mkd. with 1 notch on the E. and 5 notches on the W. edge (record a sandstone 24x11x6 ins.).

Dependent Resurvey, N. Bdy., T. 13 N., R. 10 W.

CHAINS

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.

T14N R10W
S35 | S36
S2 | S1
T13N
1967

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.

Bury the original cor. alongside the iron post.

Land, nearly level desert.
Soil, sandy clay.
No timber.
Undergrowth, medium dense sagebrush and shadscale.

N. 89° 59' E., bet. secs. 1 and 36.

Over nearly level desert land through medium dense undergrowth.

40.06 The ¼ sec. cor. of secs. 1 and 36, monumented with a lava stone, 10x8x4 ins., firmly set in the ground and mkd. ¼ on the N. face (record a flintstone, 12x10x8 ins.)

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.

T14N R10W
¼ S36
S1
T13N
1967

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.

Bury the original cor. alongside the iron post.

S. 89° 24' E., beginning new measurement.

35.35 Bladed dirt road, bears N. 35° E. and S. 35° W.

39.78 Point for the cor. of Tps. 13 and 14 N., Rs. 9 and 10 W. at proportionate distance; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.

Dependent Resurvey, N. Bdy., T. 13 N., R. 10 W.

CHAINS

T14N
R10W R9W
S36 | S31
S1 | S6
T13N
R10W R9W

1967

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.

From the above cor., the standard cor. of Tps.13 N., Rs. 9 and 10 W., monumented with an iron post, 2½ ins. in diam., hereinbefore described, bears S. 0° 37' E., 484.20 chs. distance.

The ¼ sec. cor. of secs. 31 and 36, T. 14 N., Rs. 9 and 10 W., monumented with a white flintstone, 10x6x4 ins., set in a mound of stone and mkd. ¼ on the W. face, bears N. 0° 51' E., 40.35 chs. distance.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.

T14N
R10W R9W
¼
S36 | S31

1967

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.

Bury the original cor. alongside the iron post.

The ¼ sec. cor. of secs. 6 and 31, Tps. 13 and 14 N., R. 9 W., monumented with a wood stake, 4 ft. long, 3 ins. square, bears N. 88° 35' E., 42.87 chs. distance.

Land, nearly level desert.
Soil, sandy clay.
No timber.
Undergrowth, medium dense sagebrush and shadscale.

Dependent Resurvey, E. Bdy., T. 13 N., R. 10 W.

Reestablishment of the Survey Executed by G.V.M. Boutelle Deputy Surveyor in 1872.

From the standard cor. of T. 13 N., Rs. 9 and 10 W., hereinbefore described.

N. 0° 37' W., bet. secs. 31 and 36.

Over nearly level desert land; area has been reseeded; medium dense growth of grass.

40.35 Point for the ¼ sec. cor. of secs. 31 and 36 at proportionate distance; there is no remaining evidence of the original cor.

Dependent Resurvey, E. Bdy., T. 13 N., R. 10 W.

CHAINS

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.

T13N
R10W R9W
¼
S36|S31
1967

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.

67.37 Old wire fence, bears S. 89° W. and N. 89° E.

80.70 Point for the cor. of secs. 25, 30, 31 and 36 at proportionate distance; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.

T13N
R10W R9W
S25|S30
S36|S31
1967

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.

Land, nearly level desert.
Soil, sandy clay.
No timber.
Undergrowth, medium dense grass.

N. 0° 37' W., bet. secs. 25 and 30.

Over nearly level desert land; area has been reseeded, medium dense growth of grass.

29.30 Trail road, bears S. 39° E. and N. 39° W.

40.35 Point for the ¼ sec. cor. of secs. 25 and 30 at proportionate distance; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.

T13N
R10W R9W
¼
S25|S30
1967

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.

79.79 Three strand barbed wire fence, bears S. 89° 30' W. and N. 89° 30' E.; leave grass land enter medium dense sagebrush and shadscale.

CHAINS	
80.70	Point for the cor. of secs. 19, 24, 25 and 30 at proportionate distance; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd. T13N R10W R9W S24 | S19 S25 | S30 1967 Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post. Land, nearly level desert. Soil, sandy clay. No timber. Undergrowth, medium dense grass the first 70.00 chs.; medium dense sagebrush and shadscale the balance.
	N. 0° 37' W., bet. secs. 19 and 24. Over nearly level desert through medium dense undergrowth.
1.50	Trail road, bears S. 71° E. and N. 71° W.
40.35	Point for the ¼ sec. cor. of secs. 19 and 24 at proportionate distance; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd. T13N R10W R9W ¼ S24 | S19 1967 Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.
61.95	Trail road, bears S. 61° E. and N. 61° W.
80.70	Point for the cor. of secs. 13, 18, 19 and 24 at proportionate distance; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd. T13N R10W R9W S13 | S18 S24 | S19 1967 Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.

Dependent Resurvey, E. Bdy., T. 13 N., R. 10 W.

CHAINS

Land, nearly level desert.
Soil, sandy clay.
No timber.
Undergrowth, medium dense sagebrush and shadscale.

N. 0° 37' W., bet. secs. 13 and 18.

Over nearly level desert land through medium dense undergrowth.

23.45 Trail road, bears S. 30° E. and N. 30° W.

40.35 Point for the ¼ sec. cor. of secs. 13 and 18 at proportionate distance; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.

T13N
R10W R9W
¼
S13|S18
1967

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.

80.70 Point for the cor. of secs. 7, 12, 13 and 18 at proportionate distance; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.

T13N
R10W R9W
S12|S7
S13|S18
1967

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.

Land, nearly level desert.
Soil, sandy clay.
No timber.
Undergrowth, medium dense sagebrush and shadscale.

N. 0° 37' W., bet. secs. 7 and 12.

Over nearly level desert land through medium dense undergrowth.

40.35 Point for the ¼ sec. cor. of secs. 7 and 12 at proportionate distance; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.

CHAINS	
	T13N R10W R9W ¼ S12 | S7 1967 Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.
69.90	Trail road, bears S. 69° E. and N. 69° W.
80.70	Point for the cor. of secs. 1, 6, 7 and 12 at proportionate distance; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd. T13N R10W R9W S1 | S6 S12 | S7 1967 Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post. Land, nearly level desert. Soil, sandy clay. No timber. Undergrowth, medium dense sagebrush and shadscale.
	N. 0° 37' W., bet. secs. 1 and 6. Over nearly level desert land through medium dense undergrowth.
40.35	Point for the ¼ sec. cor. of secs. 1 and 6 at proportionate distance; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd. T13N R10W R9W ¼ S1 | S6 1967 Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.
80.70	The cor. of Tps. 13 and 14 N., Rs. 9 and 10 W., monumented with an iron post, 2½ ins. in diam., hereinbefore described. Land, nearly level desert. Soil, sandy clay. No timber. Undergrowth, medium dense sagebrush and shadscale.

CHAINS

Dependent Resurvey of the Subdivisional Lines, T. 13 N., R. 10 W.

Reestablishment of the Survey Executed by G.V.M. Boutelle, Deputy Surveyor, in 1873.

From the standard cor. of secs. 35 and 36, on the S. bdy. of the Tp., hereinbefore described.

N. 0° 25' E., bet. secs. 35 and 36.

Over nearly level desert land through medium dense undergrowth.

40.20 Point for the ¼ sec. cor. of secs. 35 and 36 at proportionate distance; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.

T13N R10W
¼
S35|S36
1967

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.

54.10 Trail road, bears S. 44° W. and N. 44° E.

80.40 Point for the cor. of secs. 25, 26, 35 and 36 at proportionate distance; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.

T13N R10W
S26|S25
S35|S36
1967

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.

Land, nearly level desert.
Soil, sandy clay.
No timber.
Undergrowth, medium dense sagebrush and shadscale.

From the cor. of secs. 25, 30, 31 and 36, on the E. bdy. of the Tp., hereinbefore described.

N. 89° 37' W., bet. secs. 25 and 36.

Over nearly level land; area has been reseeded, medium dense growth of grass.

Dependent Resurvey, T. 13 N., R. 10 W.

CHAINS	
40.09	Point for the ¼ sec. cor. of secs. 25 and 36 at proportionate distance; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd. T13N R10W ¼ S25/S36 1967 Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.
70.70	Barbed wire fence, bears N. and S.; leave grass land enter sagebrush and shadscale.
80.18	The cor. of secs. 25, 26, 35 and 36. Land, nearly level desert. Soil, sandy clay. No timber. Undergrowth, medium dense grass the first 70.70 chs.; medium dense sagebrush and shadscale the balance.
	N. 2° 29' W., bet. secs. 25 and 26. Over level desert land through medium dense undergrowth.
40.24	Point for the ¼ sec. cor. of secs. 25 and 26 at proportionate distance; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd. T13N R10W ¼ S26|S25 1967 Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.
80.48	The cor. of secs. 23, 24, 25 and 26, monumented with a charred wood stake, 3 ft. long, 3 ins. square, set in a small mound of earth and stone and mkd. with 1 notch on the E. and 2 notches on the S. face. At the cor. point Set an iron post, 30 ins. long 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd. T13N R10W S23|S24 S26|S25 1967

CHAINS	
	Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post. Reset the original cor. alongside the iron post. Land, level desert. Soil, sandy clay. No timber. Undergrowth, medium dense sagebrush and shadscale.
	From the cor. of secs. 19, 24, 25 and 30, on the E. boundary of the Tp., hereinbefore described. N. 89° 51' W., bet. secs. 24 and 25. Over nearly level desert land through medium dense sagebrush and shadscale.
23.40	Trail road, bears irregularly N. 45° E. and S. 45° W.
33.20	Dirt road, bears irregularly N. 45° E. and S. 45° W.
41.37	Point for the ¼ sec. cor. of secs. 24 and 25 at proportionate distance; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd. T13N R10W ¼ S24/S25 1967 Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.
82.74	The cor. of secs. 23, 24, 25 and 26. Land, nearly level desert. Soil, sandy clay. No timber. Undergrowth, medium dense sagebrush and shadscale.
	N. 0° 21' E., bet. secs. 23 and 24. Over level desert land through medium dense undergrowth.
11.30	Trail road, bears S. 50° W. and N. 50° E.
39.32	Point for the ¼ sec. cor. of secs. 23 and 24, at porportionate distance; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.

CHAINS

T13N R10W
¼
S23 | S24
1967

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.

78.64 The cor. of secs. 13, 14, 23 and 24, monumented with a charred cedar stake, 4 ft. long, 3 ins. square, firmly set in the ground and small mound of stone, stake partially decayed, but with enough scribe mks. to identify.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.

T13N R10W
S14 | S13
S23 | S24
1967

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.

Reset the original cor. alongside the iron post.

Land, level desert.
Soil, sandy clay.
No timber.
Undergrowth, medium dense sagebrush and shadscale.

From the cor. of secs. 13, 18, 19 and 24, on the E. bdy. of the Tp., hereinbefore described.

S. 88° 42' W., bet. secs. 13 and 24.

Over nearly level desert land through medium dense undergrowth.

7.90 Unimproved dirt road, bears irregularly N. 22° E. and S. 22° W.

40.75 Point for the ¼ sec. cor. of secs. 13 and 24, at proportionate distance; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.

T13N R10W
¼ S13
S24
1967

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.

81.50 The cor. of secs. 13, 14, 23 and 24.

CHAINS

Land, nearly level desert.
Soil, sandy clay.
No timber.
Undergrowth, medium dense sagebrush, scant shadscale.

N. 0° 09' W., bet. secs. 13 and 14.

Over level desert land through medium dense undergrowth.

4.00 Barbed wire fence, bears S. 82° W. and N. 82° E.; enter reseeded area.

40.15 Point for the ¼ sec. cor. of secs. 13 and 14 at proportionate distance; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.

T13N R10W
¼
S14 | S13
1967

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.

80.30 Point for the cor. of secs. 11, 12, 13 and 14 at proportionate distance; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.

T13N R10W
S11 | S12
S14 | S13
1967

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.

Land, level desert.
Soil, sandy clay.
No timber.
Undergrowth, medium dense sagebrush the first 4.00 chs.; area reseeded to grass the balance.

From the cor. of secs. 7, 12, 13 and 18 on the E. bdy. of the Tp., hereinbefore described.

S. 88° 25' W., bet. secs. 12 and 13.

Over nearly level desert land through medium dense undergrowth.

Dependent Resurvey, T. 13 N., R. 10 W.

CHAINS	
21.30	Trail road, bears S. 30° E. and N. 30° W.
40.42	Point for the ¼ sec. cor. of secs. 12 and 13 at proportionate distance; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd. T13N R10W ¼ S12 / S13 1967 Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.
80.84	The cor. of secs. 11, 12, 13 and 14. Land, nearly level desert. Soil, sandy clay. No timber. Undergrowth, medium dense sagebrush, scant shadscale.
	N. 0° 19' W., bet. secs. 11 and 12. Over nearly level land; area has been reseeded, medium dense grass and weeds.
40.15	Point for the ¼ sec. cor. of secs. 11 and 12 at proportionate distance; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd. T13N R10W ¼ S11 | S12 1967 Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.
50.80	Dirt road, bears S. 26° W. to Kelton and N. 26° E. to Snowville.
80.30	Point for the cor. of secs. 1, 2, 11 and 12 at proportionate distance; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd. T13N R10W S2 | S1 / S11 | S12 1967

Dependent Resurvey, T. 13 N., R. 10 W.

CHAINS	
	Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post. Land, nearly level desert. Soil, sandy clay. No timber. Undergrowth, area has been reseeded to grass.
	From the cor. of secs. 1, 6, 7 and 12 on the E. bdy. of the Tp., hereinbefore described. S. 88° 05' W., bet. secs. 1 and 12. Over level desert land through medium dense undergrowth.
40.22	Point for the ¼ sec. cor. of secs. 1 and 12 at proportionate distance; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd. T13N R10W ¼ S1/S12 1967 Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.
55.00	Dirt road, bears N. 30° E. to Snowville and S. 30° W. to Kelton.
80.44	The cor. of secs. 1, 2, 11 and 12. Land, level desert. Soil, sandy clay. No timber. Undergrowth, medium dense sagebrush, scant shadscale.
	N. 2° 14' W., bet. secs. 1 and 2. Over level desert land, area has been reseeded to grass.
3.47	Barbed wire fence, bears N. 89° 42' E., and S. 89° 42' W.; leave reseeded area enter medium dense undergrowth.
15.75	Trail road, bears S. 44° W. and N. 44° E.
24.75	Trail road, bears S. 40° W. and N. 40° E.
40.18	The ¼ sec. cor. of secs. 1 and 2, monumented with a cedar post, 36 ins. long, 3 ins. square, set in a small mound of earth and stone, and mkd. ¼ on the W. face.

CHAINS

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.

T13N R10W
¼
S2|S1
1967

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.

Reset the original cor. alongside the iron post.

N. 1° 34' E., beginning new measurement.

43.52 The cor. of secs. 1, 2, 35 and 36 on the N. bdy. of the Tp., hereinbefore described.

Land, level desert.
Soil, sandy clay.
No timber.
Undergrowth, medium dense sagebrush, scant shadscale, grass and weeds.

From the standard cor. of secs. 34 and 35 on the S. bdy. of the Tp., hereinbefore described.

N. 0° 13' E., bet. secs. 34 and 35.

Over nearly level desert land through medium dense undergrowth.

17.00 Trail road, bears S. 40° W. and N. 40° E.

40.12 Point for the ¼ sec. cor. of secs. 34 and 35 at proportionate distance; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.

T13N R10W
¼
S34|S35
1967

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.

80.24 Point for the cor. of secs. 26, 27, 34 and 35 at proportionate distance; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.

Dependent Resurvey, T. 13 N., R. 10 W.

CHAINS	
	T13N R10W S27 | S26 S34 | S35 1967 Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post. Land, nearly level desert. Soil, sandy clay. No timber. Undergrowth, medium dense sagebrush and shadscale.
	From the cor. of secs. 25, 26, 35 and 36. S. 89° 43' W., bet. secs. 26 and 35. Over nearly level desert land through medium dense undergrowth.
19.95	Swale, drains irregularly S.
40.20	Point for the ¼ sec. cor. of secs. 26 and 35, at proportionate distance; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd. T13N R10W ¼ S26 S35 1967 Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.
76.50	Trail road, bears N. 10° W. and S. 10° E.
80.40	The cor. of secs. 26, 27, 34 and 35. Land, nearly level desert. Soil, sandy clay. No timber. Undergrowth, medium dense sagebrush, scant shadscale.
	N. 2° 08' W., bet. secs. 26 and 27. Over nearly level land through scant undergrowth.
24.90	Trail road, bears S. 10° E. and N. 10° W.
40.15	Point for the ¼ sec. cor. of secs. 26 and 27 at proportionate distance; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd. T13N R10W ¼ S27 | S26 1967

Dependent Resurvey, T. 13 N., R. 10 W.

CHAINS	
	Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.
80.30	The cor. of secs. 22, 23, 26 and 27, monumented with a wood post, 36 ins. long, 3 ins. square, set in a small mound of earth and stone; post is partially decayed but with enough remaining mks. to identify. At the cor. point Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd. T13N R10W S22 | S23 S27 | S26 1967 Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post. Reset the original cor. alongside the iron post. Land, nearly level desert. Soil, sandy clay. No timber. Undergrowth, medium dense shadscale, scant sagebrush.
	From the cor. of secs. 23, 24, 25 and 26. S. 89° 38' W., bet. secs. 23 and 26. Over nearly level desert land through medium dense undergrowth.
11.00	Trail road, bears irregularly N. 45° E. and S. 45° W.
29.00	Wash, 20 lks. wide, 4 ft. deep, drains S. 45° E.
35.60	Wash, 10 lks. wide, 2 ft. deep, drains S.
39.95	Point for the ¼ sec. cor. of secs. 23 and 26 at proportionate distance; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd. T13N R10W ¼ S23 S26 1967 Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.
79.90	The cor. of secs. 22, 23, 26 and 27. Land, nearly level desert. Soil, sandy clay. No timber. Undergrowth, medium dense sagebrush and shadscale.

Dependent Resurvey, T. 13 N., R. 10 W.

CHAINS

N. 0° 16' E., bet. secs. 22 and 23.

Over nearly level desert land through medium dense undergrowth.

40.35 Point for the ¼ sec. cor. of secs. 22 and 23 at proportionate distance; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.

T13N R10W
¼
S22 | S23
1967

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.

80.70 Point for the cor. of secs. 14, 15, 22 and 23 at proportionate distance; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.

T13N R10W
S15 | S14
S22 | S23
1967

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.

Land, nearly level desert.
Soil, sandy clay.
Undergrowth, medium dense sagebrush and shadscale.

From the cor. of secs. 13, 14, 23 and 24.

N. 88° 27' W., bet. secs. 14 and 23.

Over nearly level desert land through medium dense undergrowth.

39.86 The ¼ sec. cor. of secs. 14 and 23, monumented with a cedar post, 4 ft. long, 3 ins. square, set in a small mound of earth and stone and mkd. ¼ on the W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.

T13N R10W
¼ S14
S23
1967

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.

Dependent Resurvey, T. 13 N., R. 10 W.

CHAINS	
	Reset the original cor. alongside the iron post.
	N. 89° 20' W., beginning new measurement.
40.10	The cor. of secs. 14, 15, 22 and 23. Land, nearly level desert. Soil, sandy clay. No timber. Undergrowth, medium dense sagebrush and shadscale.
	N. 0° 24' W., bet. secs. 14 and 15. Over nearly level desert land through medium dense undergrowth.
2.12	Four strand barbed wire fence, bears E. and W.
17.40	Leave brush covered land enter reseeded area.
27.05	Trail road, bears S. 35° W. and N. 35° E.
40.35	Point for the ¼ sec. cor. of secs. 14 and 15 at proportionate distance; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. in diam., 22 ins. in the ground, with brass cap mkd. T13N R10W ¼ S15 | S14 1967 Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.
80.70	Point for the cor. of secs. 10, 11, 14 and 15 at proportionate distance; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd. T13N R10W S10 | S11 S15 | S14 1967 Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post. Land, nearly level desert. Soil, sandy clay. No timber. Undergrowth, medium dense sagebrush and shadscale the first 17.40 chs.; area has been reseeded to grass the balance.
	From the cor. of secs. 11, 12, 13 and 14.

CHAINS

N. 88° 39' W., bet. secs. 11 and 14.

Over nearly level ground across reseeded area.

35.00 Trail road, bears S. 30° W. and N. 30° E.

40.18 Point for the ¼ sec. cor. of secs. 11 and 14 at proportionate distance; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.

T13N R10W

¼ S11/S14

1967

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.

80.36 The cor. of secs. 10, 11, 14 and 15.

Land, nearly level.
Soil, sandy clay.
No timber.
Undergrowth, area has been reseeded to grass.

N. 0° 30' W., bet. secs. 10 and 11.

Over nearly level land that has been reseeded to grass.

2.32 Four strand barbed wire fence, bears S. 36° 36' W. and N. 36° 36' E.; trail road along N. side of fence leave reseeded area enter sagebrush and shadscale.

37.60 Trail road, bears S. 35° W. and N. 35° E.

40.35 Point for the ¼ sec. cor. of secs. 10 and 11 at proportionate distance; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.

T13N R10W

¼

S10|S11

1967

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.

53.70 Trail road, bears S. 80° W. and N. 80° E.

80.70 The cor. of secs. 2, 3, 10 and 11, monumented with a wood post, 4 ft. long, 3 ins. square, firmly set in the ground and mkd. with 2 notches on the E. and 5 notches on the S. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.

CHAINS

T13N R10W

S3	S2
S10	S11

1967

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.

Reset the original cor. alongside the iron post.

Land, nearly level desert.
Soil, sandy clay.
No timber.
Undergrowth, medium dense sagebrush and shadscale.

From the cor. of secs. 1, 2, 11 and 12.

N. 86° 25' W., bet. secs. 2 and 11.

21.40 Four strand barbed wire fence, bears S. 36° 36' W. and N. 36° 36' E., 3.00 chs. then N. 89° 42' E.

40.40 The ¼ sec. cor. of secs. 2 and 11, monumented with a wood post, 4 ft. long, 3 ins. square, set 1 ft. in the ground and mkd. ¼ on the N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.

T13N R10W

¼ S2
S11

1967

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.

Reset the original cor. alongside the iron post.

S. 89° 47' W., beginning new measurement.

18.60 Wash, 15 lks. wide, 2 ft. deep, drains S. 30° E.

23.60 Wash, 20 lks. wide, 4 ft. deep, drains S. 25° E.

40.29 The cor. of secs. 2, 3, 10 and 11.

Land, nearly level desert.
Soil, sandy clay.
No timber.
Undergrowth, medium dense sagebrush and shadscale.

N. 0° 10' E., bet. secs. 2 and 3.

Over nearly level desert land through medium dense undergrowth.

19.00 Wash, 6 ft. wide, 4½ ft. deep, drains S. 50° E.

19.40 Trail road, bears S. 70° E. and N. 50° W.

40.34 Point for the ¼ sec. cor. of secs. 2 and 3 at proportionate distance; there is no remaining evidence of the original cor.

Dependent Resurvey, T. 13 N., R. 10 W.

CHAINS

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.

T13N R10W
¼
S3 | S2
1967

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.

81.15 The cor. of secs. 2, 3, 34 and 35, on the N. bdy. of the Tp., hereinbefore described.

Land, nearly level desert.
Soil, sandy clay.
No timber.
Undergrowth, medium dense sagebrush and shadscale.

Reestablishment of the Survey Executed by G.V.M. Boutelle Deputy Surveyor in 1873 and Resurveyed by E. Wilkes and C. Betts, Deputy Surveyors, in 1886.

From the standard cor. of secs. 33 and 34, on the S. bdy. of the Tp., hereinbefore described.

N. 0° 08' E., bet. secs. 33 and 34.

Over desert land, sloping gently to the SE.; through medium dense undergrowth.

40.24 Point for the ¼ sec. cor. of secs. 33 and 34 at proportionate distance; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.

T13N R10W
¼
S33 | S34
1967

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.

80.48 Point for the cor. of secs. 27, 28, 33 and 34, at proportionate distance; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.

T13N R10W
S28 | S27
S33 | S34
1967

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.

Land, nearly level desert.
Soil, sandy clay.
No timber.
Undergrowth, medium dense sagebrush and shadscale.

Dependent Resurvey, T. 13 N., R. 10 W.

CHAINS	
	Reestablishment of the Survey Executed by G.V.M. Boutelle, Deputy Surveyor in 1873.
	From the cor. of secs. 26, 27, 34 and 35.
	S. 89° 57' W., bet. secs. 27 and 34.
	Over nearly level desert land through scant undergrowth.
5.40	Trail road, bears irregularly N. and S.
27.90	Trail road, bears irregularly N. and S.
40.14	Point for the ¼ sec. cor. of secs. 27 and 34 at proportionate distance; there is no remaining evidence of the original cor.
	Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.
	T13N R10W ¼ S27/S34 1967
	Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.
80.28	The cor. of secs. 27, 28, 33 and 34.
	Land, nearly level desert. Soil, sandy clay. No timber. Undergrowth, medium dense sagebrush and shadscale.
	Reestablishment of the Survey Executed by G.V.M. Boutelle Deputy Surveyor in 1873 and Resurveyed by E. Wilkes and C. Betts, Deputy Surveyors, in 1886.
	N. 1° 26' W., bet. secs. 27 and 28.
	Over gently rolling desert land through medium dense undergrowth; asc. 45 ft. over a gentle S. slope.
40.25	Point for the ¼ sec. cor. of secs. 27 and 28 at proportionate distance; there is no remaining evidence of the original cor.
	Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.
	T13N R10W ¼ S28|S27 1967
	Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.
80.50	Point for the cor. of secs. 21, 22, 27 and 28 at proportionate distance; there is no remaining evidence of the original cor.

Dependent Resurvey, T. 13 N., R. 10 W.

CHAINS	
	Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd. T13N R10W S21 | S22 S27 | S28 1967 Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post. Land, nearly level desert. Soil, sandy clay. No timber. Undergrowth, medium dense sagebrush, shadscale and weeds.
	Reestablishment of the Survey Executed by G.V.M. Boutelle, Deputy Surveyor in 1873. From the cor. of secs. 22, 23, 26 and 27. N. 89° 56' W., bet. secs. 22 and 27. Over nearly level desert land through medium dense undergrowth.
9.10	Trail road, bears irregularly N. and S.; asc. 195 ft. over an E. slope.
26.00	Low sagebrush covered ridge, bears N. and S.; desc. 45 ft. over a gentle W. slope.
39.63	Point for the ¼ sec. cor. of secs. 22 and 27 at proportionate distance; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd. T13N R10W ¼ S22 S27 1967 Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post. Desc. 105 ft. over a gentle W. slope.
79.26	The cor. of secs. 21, 22, 27 and 28. Land, rolling desert. Soil, sandy clay. No timber. Undergrowth, medium dense sagebrush, scant grass and weeds.

CHAINS

Reestablishment of the Survey Executed by G.V.M. Boutelle, Deputy Surveyor in 1873 and Resurveyed by E. Wilkes and C. Betts, Deputy Surveyors in 1886.

N. 2° 17' W., bet. secs. 21 and 22.

Over rolling desert land through medium dense undergrowth; desc. 45 ft. along a gentle NW. slope.

14.60 Trail road, in bottom of swale, bears N. 40° E. and S. 40° W.

40.27 The ¼ sec. cor. of secs. 21 and 22, monumented with a wood post, 36 ins. long, 3 ins. square, set 8 ins. in the ground and mkd. ¼ on the W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.

T13N R10W
¼
S21|S22
1967

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.

Reset the original cor. alongside the iron post.

N. 1° 28' E., beginning new measurement.

39.89 The cor. of secs. 15, 16, 21 and 22, monumented with a partially decayed wood post, 4 ft. long, 3 ins. square, firmly set in the ground with enough remaining scribe mks. to identify.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 20 ins. in the ground, with brass cap mkd.

T13N R10W
S16|S15
S21|S22
1967

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.

Reset the original cor. alongside the iron post.

Land, rolling desert.
Soil, sandy clay.
No timber.
Undergrowth, medium dense sagebrush, scant grass.

Reestablishment of the Survey Executed by G.V.M. Boutelle, Deputy Surveyor, in 1873.

From the cor. of secs. 14, 15, 22 and 23.

Dependent Resurvey, T. 13 N., R. 10 W.

CHAINS	
	S. 89° 37' W., bet. secs. 15 and 22.
	Over rolling desert land through medium dense undergrowth.
.60	Dirt road, bears N. 35° E. and S. 35° W.
23.00	Dirt road, bears N. 28° 30' E. and S. 28° 30' W.
40.13	Point for the ¼ sec. cor. of secs. 15 and 22 at proportionate distance; there is no remaining evidence of the original cor.
	Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd. T13N R10W ¼ S15/S22 1967
	Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.
	Asc. 25 ft. over a gentle E. slope.
58.30	Trail road, bears irregularly N. and S.; asc. 95 ft. over an E. slope.
80.26	The cor. of secs. 15, 16, 21 and 22.
	Land, rolling desert. Soil, sandy clay. No timber. Undergrowth, medium dense sagebrush, scant grass.
	Reestablishment of the Survey Executed by G.V.M. Boutelle Deputy Surveyor in 1873 and Resurveyed by E. Wilkes and C. Betts, Deputy Surveyors, in 1886.
	N. 1° 28' W., bet. secs. 15 and 16.
	Over nearly level desert bench land through medium dense undergrowth.
11.15	Rim of bench, bears NW. and SE.; desc. 115 ft. along a gentle NE. slope.
40.63	The ¼ sec. cor. of secs. 15 and 16, monumented with a sandstone, 14x8x6 ins., firmly set in the ground and mkd. ¼ on the W. face.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd. T13N R10W ¼ S16|S15 1967

Dependent Resurvey, T. 13 N., R. 10 W.

CHAINS

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.

Bury the original cor. alongside the iron post.

N. 0° 20' W., beginning new measurement.

Over gently rolling land.

40.17 The cor. of secs. 9, 10, 15 and 16, monumented with a partially decayed wood post, 3½ ft. long, 3 ins. square, set in a small mound of earth and stone mkd. with 3 notches on the E. and 4 notches on the S. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 20 ins. in the ground and in a collar of stone, with brass cap mkd.

T13N R10W

S9	S10
S16	S15

1967

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.

Reset the original cor. alongside the iron post.

Land, rolling desert.
Soil, sandy clay.
No timber.
Undergrowth, medium dense sagebrush, scant grass.

Reestablishment of the Survey Executed by G.V.M. Boutelle, Deputy Surveyor, in 1873.

From the cor. of secs. 10, 11, 14 and 15.

S. 89° 47' W., bet. secs. 10 and 15.

Over nearly level desert land across reseeded area.

4.64 Four-strand barbed wire fence, bears S. 73° 40' W. and N. 73° 40' E.

40.44 Point for the ¼ sec. cor. of secs. 10 and 15 at proportionate distance; there is no remaining evidence of the original cor.

T13N R10W

¼	S10
	S15

1967

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.

Dependent Resurvey, T. 13 N., R. 10 W.

CHAINS

69.60 Trail road, bears S. 35° E. and N. 35° W.

80.88 The cor. of secs. 9, 10, 15 and 16.

Land, gently rolling desert.
Soil, sandy clay.
No timber.
Undergrowth, medium dense sagebrush, scant grass.

Reestablishment of the Survey Executed by G.V.M. Boutelle Deputy Surveyor, in 1873 and Resurveyed by E. Wilkes and C. Betts, Deputy Surveyors, in 1886.

N. 0° 06' W., bet. secs. 9 and 10.

Over gently rolling desert land through medium dense undergrowth.

25.20 Trail road, bears S. 20° E. and N. 20° W.

33.50 Wash, 10 lks. wide, 2 ft. deep, drains S. 30° E.

40.07 Point for the ¼ sec. cor. of secs. 9 and 10 at proportionate distance; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.

T13N R10W
¼
S9 | S10
1967

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.

Bury broken glass around the iron post.

80.14 The cor. of secs. 3, 4, 9 and 10, monumented with a partially decayed wood post, set 12 ins. in a mound of earth and stone, dimly mkd. with 3 notches on the E. and 5 notches on the S. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.

T13N R10W
S4 | S3
S9 | S10
1967

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.

Reset the original cor. alongside the iron post.

Land, gently rolling desert.
Soil, sandy clay.
No timber.
Undergrowth, medium dense sagebrush and shadscale.

Dependent Resurvey, T. 13 N., R. 10 W.

CHAINS	
	Reestablishment of the Survey Executed by G.V.M. Boutelle, Deputy Surveyor, in 1873.
	From the cor. of secs. 2, 3, 10 and 11.
	S. 89° 20' W., bet. secs. 3 and 10.
	Over nearly level desert land through medium dense undergrowth.
2.90	Trail road, bears irregularly N. and S.
40.20	Point for the ¼ sec. cor. of secs. 3 and 10 at proportionate distance; there is no remaining evidence of the original cor.
	Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.
	T13N R10W ¼ S3/S10 1967
	Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.
80.40	The cor. of secs. 3, 4, 9 and 10.
	Land, nearly level desert. Soil, sandy clay. No timber. Undergrowth, medium dense sagebrush and shadscale.
	Reestablishment of the Survey Executed by G.V.M. Boutelle, Deputy Surveyor, in 1873 and resurveyed by E. Wilkes and C. Betts, Deputy Surveyors, in 1886.
	N. 0° 19' E., bet. secs. 3 and 4.
	Over nearly level desert land through medium dense undergrowth.
29.40	Wash, 10 lks. wide, 3 ft. deep, drains irregularly E.
35.50	Wash, 20 lks. wide, 5 ft. deep, drains irregularly E.
40.80	Point for the ¼ sec. cor. of secs. 3 and 4, at proportionate distance; there is no remaining evidence of the original cor.
	Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.
	T13N R10W ¼ S4|S3 1967
	Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.

CHAINS	
74.10	Wash, 20 lks. wide, 3 ft. deep, drains irregularly E.
81.80	The cor. of secs. 3, 4, 33 and 34 on the N. bdy. of the Tp., hereinbefore described. Land, nearly level desert. Soil, sandy clay. No timber. Undergrowth, medium dense sagebrush and shadscale.
	From the standard cor. of secs. 32 and 33 on the S. bdy. of the Tp., hereinbefore described. N. 0° 05' W., bet. secs. 32 and 33. Over rolling desert land through medium dense undergrowth.
15.00	Trail road, bears S. 50° E. and N. 50° W.
22.50	Trail road, bears N. 25° E. and S. 25° W.
40.36	Point for the ¼ sec. cor. of secs. 32 and 33 at proportionate distance; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd. T13N R10W ¼ S32|S33 1967 Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post. Asc. 155 ft. along a SE. slope.
80.40	Trail road, bears S. 36° W. and N. 36° E.
80.72	Point for the cor. of secs. 28, 29, 32 and 33 at proportionate distance; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd. T13N R10W S29|S28 S32|S33 1967 Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.

Dependent Resurvey, T. 13 N., R. 10 W.

CHAINS	
	Land, rolling desert. Soil, sandy clay. No timber. Undergrowth, medium dense sagebrush, scant grass and weeds.
	From the cor. of secs. 27, 28, 33 and 34. S. 89° 56' W., bet. secs. 28 and 33. Over nearly level desert land through medium dense undergrowth.
29.30	Trail road, bears N. 60° E. and S. 60° W.
40.24	Point for the ¼ sec. cor. of secs. 28 and 33 at proportionate distance; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd. T13N R10W ¼ S28/S33 1967 Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.
50.50	Wash, 1.00 ch. wide, 12 ft. deep, drains S. 67° E.
58.25	Trail road, bears N. 23° E. and S. 23° W.; asc. 70 ft. over a SE. slope.
80.00	Trail road, bears N. 36° E. and S. 36° W.
80.48	The cor. of secs. 28, 29, 32 and 33. Land, rolling desert. Soil, rocky clay. No timber. Undergrowth, medium dense sagebrush, scant grass and shadscale.
	N. 0° 37' W., bet. secs. 28 and 29. Over rolling desert land through medium dense undergrowth; asc. 60 ft. over a gentle SE. slope.
40.36	Point for the ¼ sec. cor. of secs. 28 and 29 at proportionate distance; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. in diam., 20 ins. in the ground, with brass cap mkd. T13N R10W S29 ¼ S28 1967

Dependent Resurvey, T. 13 N., R. 10 W.

CHAINS	
	Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.
	The above cor. is set on the top of a rise bearing E. and W.
	Desc. 95 ft. along a NE. slope.
80.72	Point for the cor. of secs. 20, 21, 28 and 29 at proportionate distance; there is no remaining evidence of the original cor.
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T13N R10W S20 | S21 S29 | S28 1967
	Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.
	Land, rolling desert. Soil, sandy clay. No Timber. Undergrowth, dense sagebrush, scant shadscale and grass.
	From the cor. of secs. 21, 22, 27 and 28.
	N. 89° 56' W., bet. secs. 21 and 28.
	Over nearly level desert land through medium dense undergrowth.
15.95	Trail road, bears S. 35° W. and N. 45° E.
30.55	Trail road, bears S. 50° E. and N. 50° W.
39.67	Point for the ¼ sec. cor. of secs. 21 and 28 at proportionate distance; there is no remaining evidence of the original cor.
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T13N R10W ¼ S21/S28 1967
	Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.
48.85	Trail road, bears S. 40° E. and N. 40° W.
79.34	The cor. of secs. 20, 21, 28 and 29.
	Land, nearly level desert. Soil, sandy clay. No. timber. Undergrowth, medium dense sagebrush and shadscale.

CHAINS

Reestablishment of the Survey Executed by E. Wilkes and C. Betts, Deputy Surveyors, in 1886.

N. 1° 14' W., bet. secs. 20 and 21.

Over gently rolling desert land through medium dense undergrowth.

40.37 Point for the ¼ sec. cor. of secs. 20 and 21 at proportionate distance; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T13N R10W
¼
S20 | S21
1967

42.80 Enter dense timber.

46.20 Trail road, bears S. 30° E. and N. 30° W.

52.20 Wash, 80 lks. wide, 4 ft. deep, drains S. 30° E.; asc. 150 ft. over a S. slope.

75.00 Slope changes to SW.

80.74 Point for the cor. of secs. 16, 17, 20 and 21 at proportionate distance; there is no remaining evidence of the original cor.

On solid rock, set an iron post, 30 ins. long, 2½ ins. diam., in a mound of stone, 6 ft. base to top, with brass cap mkd.

T13N R10W
S17 | S16
S20 | S21
1967

Land, desert hills.
Soil, sandy and rocky clay.
Timber, dense juniper, the last ½ mile.
Undergrowth, medium dense sagebrush, scant grass.

From the cor. of secs. 15, 16, 21 and 22.

N. 89° 34' W., bet. secs. 16 and 21.

Over desert mountain land through medium dense undergrowth; asc. 277 ft. over an E. slope.

36.00 Rocky outcrop, bears N. and S.

40.24 Point for the ¼ sec. cor. of secs. 16 and 21 at proportionate distance; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground, to solid rock and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T13N R10W
¼ S16
S21
1967

CHAINS

Asc. 80 ft. over a rocky E. slope.

25.40 Spur, projects S. 40° E.; desc. 85 ft. over a SW. slope.

80.48 The cor. of secs. 16, 17, 20 and 21.

Land, desert mountains.
Soil, rocky clay.
Timber, widely scattered juniper the last 30 chs.
Undergrowth, medium dense sagebrush, scant grass.

N. 0° 34' W., bet. secs. 16 and 17.

Over desert mountain land through medium dense timber and medium dense undergrowth; asc. 240 ft. over a broken SW. slope.

25.00 Rocky spur, projects S. 50° E.; desc. 80 ft. over a N. slope.

40.36 Point for the ¼ sec. cor. of secs. 16 and 17 at proportionate distance; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. in diam., 10 ins. in the ground, to solid rock and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T13N R10W
¼
S17 | S16
1967

Set a steel fence post, 6 ft. long, 2 ft. in the ground and mound, alongside the iron post.

42.40 Rim of ledges, bears S. 35° E. and N. 35° W.; thence over rolling bench land.

71.70 Rim of bench; desc. 75 ft. over a broken N. slope; leave timber.

80.72 Point for the cor. of secs. 8, 9, 16 and 17 at proportionate distance; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.

T13N R10W
S8 | S9
S17 | S16
1967

Raise a mound of stone, 3½ ft. base, 3 ft. high, W. of the cor.

Land, desert mountains.
Soil, rocky clay.
Timber, medium dense juniper, the first 71.70 chs.
Undergrowth, medium dense sagebrush.

Dependent Resurvey, T. 13 N., R. 10 W.

CHAINS

From the cor. of secs. 9, 10, 15 and 16.

N. 89° 37' W., bet. secs. 9 and 16.

Over desert mountain land through medium dense undergrowth; asc. 260 ft. over an E. slope.

40.00 Point for the ¼ sec. cor. of secs. 9 and 16 at proportionate distance; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. in diam., 14 ins. in the ground, to solid rock and in a mound of stone, 3½ ft. base, to top, with brass cap mkd.

T13N R10W

¼ S9/S16

1967

Asc. 45 ft. over an E. slope.

46.40 Spur, projects N.; desc. 95 ft. over a W. slope.

60.10 Ravine, drains N.; asc. 165 ft. over a rocky E. slope.

75.70 Spur, projects N. 20° W.; desc. gentle NW. slope.

80.00 The cor. of secs. 8, 9, 16 and 17.

Land, desert hills.
Soil, rocky clay.
No timber.
Undergrowth, medium dense sagebrush, scant grass.

N. 0° 07' E., bet. secs. 8 and 9.

Over desert mountain land through medium dense undergrowth; desc. 290 ft. over a N. slope.

40.36 Point for the ¼ sec. cor. of secs. 8 and 9 at proportionate distance; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.

T13N R10W

¼

S8|S9

1967

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.

Dependent Resurvey, T. 13 N., R. 10 W.

CHAINS	
	Reestablishment of the Survey Executed by G.V.M. Boutelle, Deputy Surveyor, in 1873 and Resurveyed by E. Wilkes and C. Betts, Deputy Surveyors, in 1886.
	N. 0° 07' E., with continuous measurement.
	Desc. 20 ft. over a N. slope.
46.00	Base of hill; thence over nearly level land.
69.40	Wash, 20 lks. wide, 2½ ft. deep, drains N. 40° E.
80.72	Point for the cor. of secs. 4, 5, 8 and 9 at proportionate distance; there is no remaining evidence of the original cor.
	Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.
	T13N R10W S5 | S4 S8 | S9 1967
	Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.
	Land, low hills and nearly level desert. Soil, rocky and sandy clay. No timber. Undergrowth, medium dense sagebrush and shadscale.
	From the cor. of secs. 3, 4, 9 and 10.
	N. 89° 11' W., bet. secs. 4 and 9.
	Over nearly level desert land through medium dense undergrowth.
27.75	Trail road, bears S. 25° E. and N. 25° W.
39.87	Point for the ¼ sec. cor. of secs. 4 and 9 at proportionate distance; there is no remaining evidence of the original cor.
	Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.
	T13N R10W ¼ S4 / S9 1967
	Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.
79.74	The cor. of secs. 4, 5, 8 and 9.
	Land, nearly level desert. Soil, sandy clay. No timber. Undergrowth, medium dense sagebrush and shadscale.

CHAINS

N. 0° 06' E., bet. secs. 4 and 5.

Over nearly level desert land through medium dense undergrowth.

35.90 Trail road, bears S. 45° W. and N. 45° E.

40.36 Point for the ¼ sec. cor. of secs. 4 and 5 at proportionate distance; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.

T13N R10W
¼
S5|S4
1967

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.

59.10 Wash, 10 lks. wide, 5 ft. deep, drains irregularly E.

67.90 Trail road, bears S. 60° E. and N. 60° W.

80.37 The cor. of secs. 4, 5, 32 and 33 on the N. bdy. of the Tp., hereinbefore described.

Land, nearly level desert.
Soil, sandy clay.
No timber.
Undergrowth, medium dense shadscale, scant sagebrush.

Reestablishment of the Survey Executed by E. Wilkes and C. Betts, Deputy Surveyors, in 1866.

From the standard cor. of secs. 31 and 32 on the S. bdy. of the Tp., hereinbefore described.

N. 0° 05' W., bet. secs. 31 and 32.

Over nearly level desert land through medium dense undergrowth.

24.70 Trail road, bears S. 30° E. and N. 30° W.

38.10 Trail road, bears irregularly E. and W.

40.38 Point for the ¼ sec. cor. of secs. 31 and 32 at proportionate distance; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.

T13N R10W
¼
S31|S32
1967

CHAINS

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.

58.45 Trail road, bears S. 60° E. and N. 60° W.; asc. 85 ft. over a S. slope.

80.76 The cor. of secs. 29, 30, 31 and 32, monumented with a sandstone, 26x12x6 ins., firmly set in the ground and mkd. with 1 notch on the S. and 5 notches on the E. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 22 ins. in the ground, with brass cap mkd.

T13N R10W

S30 | S29
S31 | S32

1967

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.

Bury the original cor. alongside the iron post.

Land, nearly level and desert hills.
Soil, rocky and sandy clay.
No timber.
Undergrowth, medium dense sagebrush, scant shadscale.

From the cor. of secs. 28, 29, 32 and 33.

S. 89° 55' W., bet. secs. 29 and 32.

Over desert hills through dium dense undergrowth; asc. 75 ft. over a SE. slope.

15.40 Spur, projects S. 2.00 chs. to end; desc. 55 ft. over a SW. slope.

28.20 Enter nearly level land.

40.00 The ¼ sec. cor. of secs. 29 and 32, monumented with a sandstone, 15x8x6 ins., firmly set in the ground and mkd. ¼ on the N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.

T13N R10W

¼ S29
S32

1967

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.

Bury the original cor. alongside the iron post.

Dependent Resurvey, T. 13 N., R. 10 W.

CHAINS

S. 89° 46' W., beginning new measurement.

8.70 Trail road, bears irregularly N. and S.

40.29 The cor. of secs. 29, 30, 31 and 32.

Land, rolling and nearly level desert.
Soil, sandy and rocky clay.
No timber.
Undergrowth, medium dense sagebrush and shadscale.

N. 89° 50' W., bet. secs. 30 and 31.

Over desert land sloping gently to the S.; through medium dense undergrowth.

15.80 Swale, drains S.

32.00 Swale, drains S.

41.05 The ¼ sec. cor. of secs. 30 and 31, monumented with a sandstone, 12x6x6 ins., firmly set in the ground and mkd ¼ on the N. face (record a sandstone 20x10x5 ins.).

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 20 ins. in the ground and in a collar of stone, with brass cap mkd.

T13N R10W

¼ S30/S31

1967

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.

Bury the original cor. alongside the iron post.

S. 89° 35' W., beginning new measurement.

Asc. 55 ft. over a SE. slope.

11.20 Low rocky spur, projects S.; desc. 205 ft. over a W. slope.

35.15 Trail road, bears irregularly S. 45° E. and N. 45° W., around spur.

42.14 The cor. of secs. 25, 30, 31 and 36 on the W. bdy. of the Tp., hereinbefore described.

Land, rolling desert.
Soil, rocky and sandy clay.
No timber.
Undergrowth, medium dense sagebrush and shadscale.

From the cor. of secs. 29, 30, 31 and 32.

CHAINS	
	N. 0° 19' E., bet. secs. 29 and 30.
	Over rolling desert land through medium dense undergrowth; asc. 135 ft. over a S. slope.
24.00	Spur, projects E.; desc. 35 ft. over a N. slope.
40.07	Point for the ¼ sec. cor. of secs. 29 and 30 at proportionate distance; there is no remaining evidence of the original cor.
	Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.
	T13N R10W ¼ S30 | S29 1967
	Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.
	Desc. 25 ft. over a NE. slope.
56.00	Swale, drains E.; then along an E. slope.
70.40	Trail road, bears S. 40° W. and N. 40° E.; asc. 35 ft. over a SE. slope.
80.14	The cor. of secs. 19, 20, 29 and 30, monumented with a sandstone, 20x12x8 ins., firmly set in the ground and mkd. with 2 notches on the S. and 5 notches on the N. edge (record a sandstone 24x10x10 ins.).
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.
	T13N R10W S19 | S20 S30 | S29 1967
	Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.
	Bury the original cor. alongside the iron post.
	Land, rolling desert. Soil, sandy clay. No timber. Undergrowth, medium dense sagebrush, scant grass and weeds.
	From the cor. of secs. 20, 21, 28 and 29.
	S. 89° 28' W., bet. secs. 20 and 29.
	Over rolling desert land through medium dense undergrowth; asc. 135 ft. over a NE. slope.

Dependent Resurvey, T. 13 N., R. 10 E.

CHAINS

15.20 Rim of bench, bears NW. and SE.; then over nearly level land.

39.41 Point for the ¼ sec. cor. of secs. 20 and 29 at proportionate distance; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.

T13N R10W
¼ S20/S29
1967

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.

72.75 Trail road, irregularly N. 45° E. and S. 45° W.

78.82 The cor. of secs. 19, 20, 29 and 30.

Land, desert hills.
Soil, rocky and sandy clay.
No timber.
Undergrowth, medium dense sagebrush, scant shadscale and grass.

N. 89° 45' W., bet. secs. 19 and 30.

Over desert mountain land through medium dense timber and undergrowth; asc. 285 ft. over an E. slope.

41.70 Point for the ¼ sec. cor. of secs. 19 and 30 at proportionate distance; the original cor., a sandstone, 24x20x10 ins., mkd. ¼ was found laying loose on the ground.

Set an iron post, 30 ins. long, 2½ ins. in diam., 20 ins. in the ground and in a collar of stone, with brass cap mkd.

T13N R10W
¼ S19/S30
1967

Bury the original cor. alongside the iron post.

From the above cor., USGS Triangulation Station "Hardup," bears N. 75° 28' W., 15.36 chs. dist.

Asc. 100 ft. over an E. slope.

51.80 Top of ridge, bears N. 5° E. and S. 5° W.; desc. 210 ft. over a SW. slope.

CHAINS	
83.60	The cor. of secs. 19, 24, 25 and 30 on the W. bdy. of the Tp., hereinbefore described. Land, desert mountains. Soil, rocky clay. Timber, medium dense juniper. Undergrowth, medium dense sagebrush, scant grass.
	From the cor. of secs. 19, 20, 29 and 30. N. 2° 22' W., bet. secs. 19 and 20. Over desert mountain land through medium dense undergrowth.
5.80	Enter dense timber.
7.00	Trail road, bears N. 70° W., and S. 70° E.
14.20	Wash, 60 lks. wide, 3 ft. deep, drains S. 30° E.; asc. 120 ft. over a SE. slope.
40.42	Point for the ¼ sec. cor. of secs. 19 and 20 at proportionate distance, the original cor., a sandstone 16x8x6 ins., mkd. ¼, was found laying loose on the grounds. Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd. T13N R10W ¼ S19 | S20 1967 Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post. Bury the original cor. alongside the iron post.
42.40	Timber becomes widely scattered.
43.30	Saddle bears E. and W.; desc. 145 ft. over a gentle N. slope.
80.84	Point for the cor. of secs. 17, 18, 19 and 20, at proportionate distance; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd. T13N R10W S18 | S17 S19 | S20 1967 Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.

Dependent Resurvey, T. 13 N., R. 10 W.

CHAINS

Land, desert mountains.
Soil, rocky clay.
Timber, dense juniper the first 42.40 chs., widely scattered the balance.
Undergrowth, medium dense sagebrush, scant grass.

From the cor. of secs. 16, 17, 20 and 21.

S. 89° 30' W., bet. secs. 17 and 20.

Over desert mountain land through dense timber and medium dense undergrowth; asc. 40 ft. over a SE. slope.

25.00 Trail road, bears irregularly SE. and NW.; asc. 60 ft. over an E. slope.

40.14 Point for the ¼ sec. cor. of secs. 17 and 20 at proportionate distance; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. in diam., 20 ins. in the ground, with brass cap mkd.

T13N R10W
¼ S17/S20
1967

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.

43.00 Wash, 10 lks. wide, 1 ft. deep, drains S. 60° E.; asc. 125 ft. over an E. slope.

58.00 Spur, projects N.; desc. 25 ft. over NW. slope.

69.00 Trail road, in swale, drains N. 10° W.; road, bears N. 10° W. and S. 10° E.; asc. 25 ft. over a NE. slope.

80.28 The cor. of secs. 17, 18, 19 and 20.

Land, mountainous.
Soil, rocky clay.
Timber, dense juniper.
Undergrowth, medium sagebrush and grass.

N. 89° 45' W., bet. secs. 18 and 19.

Over desert mountain land through medium dense timber and medium dense undergrowth; asc. 90 ft. over a NE. slope.

20.00 N. slope of ridge, bears S.; thence along a N. slope.

40.02 Point for the ¼ sec. cor. of secs. 18 and 19 at proportionate distance; there is no remaining evidence of the original cor.

CHAINS	
	Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd. T13N R10W ¼ S18/S19 1967 Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.
43.00	Slope changes to W.; desc. 130 ft.; timber becomes scattered.
80.36	The cor. of secs. 13, 18, 19 and 24 on the W. bdy. of the Tp., hereinbefore described. Land, desert mountains. Soil, rocky and sandy clay. Timber, dense juniper the first 43.00 chs. scattered the balance. Undergrowth, medium to scattered sagebrush and grass.
	From the cor. of secs. 17, 18, 19 and 20. N. 0° 17' W., bet. secs. 17 and 18. Over desert mountain land through scattered timber and medium dense undergrowth; desc. 20 ft. over a gentle N. slope.
9.40	Trail road, bears S. 40° E. and N. 40° W.
15.40	Rim of ledges 35 ft. high, bears N. 25° W. and S. 25° E.; desc. 85 ft. over gentle N. slope.
32.35	Trail road, bears N. 10° W. and S. 10° E.; desc. 25 ft. over a N. slope.
40.39	Point for the ¼ sec. cor. of secs. 17 and 18 at proportionate distance; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd. T13N R10W ¼ S18|S17 1968 Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post. Desc. 45 ft. over a N. slope.
50.00	Draw, drains N. 20° W.; asc. 40 ft. over a SW. slope.

Dependent Resurvey, T. 13 N., R. 10 W.

CHAINS	
62.80	Rocky spur projects W.; leave timber; desc. 55 ft. over a NW. slope.
72.40	Draw, drains W.; asc. 65 ft. over a SW. slope.
80.78	Point for the cor. of secs. 7, 8, 17 and 18 at proportionate distance; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. in diam., 8 ins. in the ground, to solid rock and in a mound of stone, 4 ft. base to top, with brass cap mkd. T13N R10W S7 | S8 S18 | S17 1967 Set a steel fence post, 6 ft. long, 2 ft. in the ground and mound, alongside the iron post. Land, desert mountains. Soil, rocky clay. Timber, dense to scattered juniper the first 63 chs.; none the balance. Undergrowth, medium dense sagebrush, scant grass.
	From the cor. of secs. 8, 9, 16 and 17. S. 89° 35' W., bet. secs. 8 and 17. Over desert mountain land through medium dense undergrowth; desc. 200 ft. over a NW. slope.
22.50	Draw, drains N.; asc. 145 ft. over an E. slope.
34.10	Spur, projects N.; desc. 50 ft. over a NW. slope.
39.90	Point for the ¼ sec. cor. of secs. 8 and 17 at proportionate distance; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. in diam., 20 ins. in the ground and in a collar of stone, with brass cap mkd. T13N R10W ¼ S8 S17 1967 Raise a mound of stone, 4 ft. base, 3 ft. high, N. of the cor. Desc. 50 ft. over a NW. slope.
51.00	Draw, drains N. 10° E.; asc. 140 ft. over an E. slope.
71.90	Spur, projects N. 5° W.; desc. 60 ft. over a W. slope.

CHAINS	
79.80	The cor. of secs. 7, 8, 17 and 18. Land, desert mountains. Soil, sandy and rocky clay. No timber. Undergrowth, medium dense sagebrush, shadscale and scant grass.
	N. 89° 54' W., bet. secs. 7 and 18. Over desert mountain land through medium dense undergrowth; desc. 100 ft. over a W. slope.
11.50	Base of hill, trail road bears irregularly N. and S.; thence over rolling desert land.
39.82	Point for the ¼ sec. cor. of secs. 7 and 18 at proportionate distance; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd. T13N R10W ¼ S7/S18 1967 Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.
64.15	Trail road, bears irregularly E. and W.
71.35	Trail road, bears irregularly N. and E.
80.02	The cor. of secs. 7, 12, 13 and 18 on the W. bdy. of the Tp., hereinbefore described. Land, desert mountains and rolling desert. Soil, sandy clay. No timber. Undergrowth, medium dense sagebrush and shadscale.
	From the cor. of secs. 7, 8, 17 and 18. N. 0° 04' E., bet. secs. 7 and 8. Over desert mountain land through medium dense undergrowth; asc. 30 ft. along a W. slope.
1.50	Low spur, projects W.; desc. 140 ft. over a N. slope.
17.60	Base of hill; desc. 25 ft. over a gentle N. slope.
23.75	Trail road, bears irregularly E. and W.; desc. 40 ft. over a gentle N. slope.
40.39	Point for the ¼ sec. cor. of secs. 7 and 8 at proportionate distance; there is no remaining evidence of the original cor.

Dependent Resurvey, T. 13 N., R. 10 W.

CHAINS	
	Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd. T13N R10W ¼ S7 | S8 1967 Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post. Thence over nearly level desert land.
80.78	Point for the cor. of secs. 5, 6, 7 and 8 at proportionate distance; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd. T13N R10W S6 | S5 S7 | S8 1967 Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post. Land, low hills and nearly level desert. Soil, sandy clay. No timber. Undergrowth, medium dense sagebrush and shadscale.
	From the cor. of secs. 4, 5, 8 and 9. S. 89° 36' W., bet. secs. 5 and 8. Over nearly level desert land through medium dense undergrowth.
20.80	Trail road, bears irregularly N. and S.; asc. 70 ft. over an E. slope.
26.70	Top of rise; thence over nearly level land.
39.97	Point for the ¼ sec. cor. of secs. 5 and 8 at proportionate distance; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd. T13N R10W ¼ S5 S8 1967 Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.
79.94	The cor. of secs. 5, 6, 7 and 8.

CHAINS	
	Land, gently rolling and nearly level desert. Soil, sandy clay. No timber. Undergrowth, medium dense shadscale, scant sagebrush.
	S. 89° 58' W., bet. secs. 6 and 7. Over nearly level desert land through scant undergrowth.
1.90	Trail road, bears S. 60° W. and N. 60° E.
38.80	Trail road, bears S. 25° E. and N. 25° W.
39.87	Point for the ¼ sec. cor. of secs. 6 and 7 at proportionate distance; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd. T13N R10W ¼ S6/S7 1967 Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.
70.00	Trail road, bears S. 10° W. and N. 10° E.
77.45	Trail road, bears irregularly N. and S.
80.15	The cor. of secs. 1, 6, 7 and 12 on the W. bdy. of the Tp., hereinbefore described. Land, level desert. Soil, sandy clay. No timber. Undergrowth, medium dense shadscale, scant sagebrush.
	From the cor. of secs. 5, 6, 7 and 8. N. 0° 05' W., bet. secs. 5 and 6. Over nearly level land through medium undergrowth.
1.10	Trail road, bears irregularly N. 60° E. and S. 60° W.
40.39	Point for the ¼ sec. cor. of secs. 5 and 6 at proportionate distance; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd. T13N R10W ¼ S6 | S5 1967

Dependent Resurvey, T. 13 N., R. 10 W.

CHAINS

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.

Reestablishment of the Survey Executed by G.V.M. Boutelle, Deputy Surveyor in 1873 and Resurveyed by E. Wilkes and C. Betts, Deputy Surveyors in 1886.

80.78 The cor. of secs. 5, 6, 31 and 32 on the N. bdy. of the Tp., hereinbefore described.

Land, level desert.
Soil, sandy clay.
No timber.
Undergrowth, medium shadscale, scant sagebrush.

General Description

The general elevation of Township 13 N., R. 10 W., varies from about 5,000 ft. above sea level on the Wildcat Hills in sec. 19 to about 4,200 ft. above sea level in the SE. portion of the township. The soil is mostly a sandy clay in the lower elevations to a rocky clay on the hills in the center west portion of the township. A dense to widely scattered growth of juniper is found in the higher elevations. The undergrowth is mainly sagebrush and shadscale with lesser amounts of greasewood, grass and weeds. There are no permanent habitations in the township. A small spring of water was noted near the ¼ sec. cor. of sec. 5. The township is accessible by numerous dirt roads, the one in the best condition is from Snowville, Utah to Kelton, Utah.

Form 4-680
(June 1963)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS

NAMES	CAPACITY
Ferrel D. Reynolds	Surveying Technician
Weldon G. Larsen	Surveying Aid
Alvin L. Bishop	Surveying Aid
Barry W. Horton	Surveying Aid
Lawrence J. Sullivan	Surveying Aid
Ray S. Muniz	Surveying Aid
Michael W. Trentzsch	Surveying Aid
Paul J. Middelstradt	Surveying Aid
William G. Jensen	Surveying Aid
Arthur K. Van Buren	Surveying Aid
Ivan Lynn Kimber	Surveying Aid

CERTIFICATE OF SURVEY

I, Fred R. Chappell, HEREBY CERTIFY upon honor that,

in pursuance of special instructions bearing date of the 20 day of February, 1967,

I have dependently resurveyed the Third Standard Parallel North (South Boundary the West, North and East Boundaries and the subdivisional lines of Township 13 North, Range 10 West

of the Salt Lake Meridian, in the State of Utah, which

are represented in the foregoing field notes as having been executed by me and under my direction;

and that said survey has been made in strict conformity with said special instructions, the Manual

of Instructions for the Survey of the Public Lands of the United States, and in specific manner

described in the foregoing field notes.

May 20, 1968
(Date)

Fred R. Chappell
(Cadastral Surveyor)
SUPERVISORY

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

SUBMITTED FOR APPROVAL
Date JAN 24 1969

BUREAU OF LAND MANAGEMENT,
Washington, D. C.

The foregoing field notes of the dependent resurvey of the Third Standard Parallel North (South Boundary), the West, North and East Boundaries and the subdivisio lines of Township 13 North, Range 10 West, Salt Lake Meridian, Utah

executed by Fred R. Chappell, Supervisory Cadastral Surveyor

having been critically examined and found correct, are hereby approved.

JUL 22 1969
(Date)

Clark L. Gumm
~~(Chief, Division of Engineering)~~
Chief, Division of Cadastral Survey

CERTIFICATE OF TRANSCRIPT

~~I CERTIFY That the foregoing transcript of the field notes of the above described surveys in~~

, is a true copy of the original field notes.

~~(Date)~~

~~(Chief, Division of Engineering)~~