

Volume

#

R0585

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
ORIGINAL

FIELD NOTES

OF THE

DEPENDENT RESURVEY OF THE

EAST BOUNDARY OF TOWNSHIP 9 SOUTH, RANGE 19 WEST

AND THE

WEST BOUNDARY OF TOWNSHIP 9 SOUTH, RANGE 17 WEST

AND THE SURVEY

OF

THE SOUTH BOUNDARY

AND A PORTION

OF THE SUBDIVISIONAL LINES OF

TOWNSHIP 9 SOUTH, RANGE 18 WEST

REC'D
APR 4 11 10 AM '61

Of the SALT LAKE Meridian,

In the State of UTAH

EXECUTED BY

FRED R. CHAPPELL AND GLEN B. HATCH, CADASTRAL SURVEYORS

LAVERN GRIFFIN,

SURVEY AID

Under supervision of

CRAIG P. SYLVESTER,

SUPERVISORY CADASTRAL SURVEYOR

Under ^{amended} special instructions dated DECEMBER 19, 19 61, which provided for the surveys

included under Group Number 437, approved MAY 1, 1962,

and assignment instructions dated MAY 14, 19 62.

Survey commenced MAY 29, 19 62

Survey completed AUGUST 2, 19 62

INDEX DIAGRAM

Township 9 SOUTH, Range 18 WEST

16 6 56	58 5 55	40 4 40	28 8	30 2 31	29 1 8
14 7 53	54 8 52	39 9 38	27 10	11	12 6
13 18 50	51 17 49	37 16 36	27 15	14	13 5
12 19 46	48 20 45	36 21 35	26 22	23	24 4
10 30 43	44 29 42	34 28 33	25 27	26	25 3 24
9 31 22	41 32 21	32 33 20	24 34 19	35 18	23 36 2 17

Township 9 South, Range 18 West

CHAINS

Township 9 South, Range 18 West of the Salt Lake Meridian Utah. The east boundary was surveyed by J. Gorlinski in 1875; the west boundary was surveyed by J. Gorlinski in 1875, and resurveyed by T. C. Bailey in 1882; the north boundary was surveyed by J. Gorlinski in 1875, and independently resurveyed by A. Nelson in 1925.

The following field notes are those of the dependent resurvey of the east boundary of T. 9 S., R. 19 W., and the west boundary of T. 9 S., R. 17 W., and the survey of the south boundary, the subdivisational lines of the West $\frac{1}{2}$ of the township and sections 2 and 36 of T. 9 S., R. 18 W.

Before restoring any corners the lines of the original survey were retraced and diligent search made for any evidence of the original corners, bearing trees, and other calls of the original field note record.

The rules of proportionate measurement were applied to ascertain the position of lost corners, but not until exhausting every reasonable possibility of finding direct evidence for the control of each particular corner.

The survey was executed with W. & L. E. Gurley Transits Numbers 461263, 570614 and 580538 constructed in accordance with the standard instrumental specifications of the Bureau of Land Management. The instruments were in good condition prior to the beginning of the survey and were maintained in proper adjustment throughout the progress of this survey.

Corners on east-west lines were set on the true latitudinal curve. Lines connecting previously established corners were run by random and true method, but for simplification of the record the random lines are omitted from the field notes. In accordance with the intent of the special instructions, all subdivisational corners established are calculated to be at the position they would occupy if the entire township were subdivided.

Measurements herein contained were made with a narrow steel tape, 8 chains in length, graduated every link for the first 100 links and thereafter at intervals of 10 links. The tape was tested by comparison with a one chain standard steel tape and found to be correct. Measurements were made on the slope with the vertical angle of each interval ascertained by a clinometer in good adjustment; horizontal equivalents alone are entered in the field notes. All lines of this survey were run by direct method where the lines were accessible; lines inaccessible were run by traverse or triangulation method. Details of such traverses or triangulations have been thoroughly checked and verified, and in order to simplify the record, the diagrams and reductions are omitted from these field notes.

The direction of the lines of this survey were determined by reference to true meridians established on line by altitude observations on the sun. The lines were carried forward by sustained angulation being supplemented by other numerous altitude observations on the sun taken throughout the progress of the survey.

Township 9 South Range 18 West

CHAINS

The geographic position for the southeast corner of the township is at Latitude $39^{\circ} 59' 35.0''$ N. and Longitude $113^{\circ} 48' 48.5''$ W., as adjusted from traverses to U.S.C. & G. S. triangulation station "North Peak Tree East Prong" at Latitude $40^{\circ} 02' 48.726''$ N. and Longitude $113^{\circ} 53' 38.605''$ W., located N. $53^{\circ} 23' W.$, 27.89 chains dist. from the $\frac{1}{2}$ sec. cor. of secs. 16 and 17.

The magnetic declination was read at a number of stations throughout the township and the average of these readings was found to be $17^{\circ} 00'$ East.

Dependent Resurvey of the West Boundary,
T. 9 S., R. 17 W.

Reestablishment of the Survey Executed by
J. Gorkinski in 1875.

Beginning at the cor. of Tps. 9 and 10 S., Rs. 17 and 18 W., monumented with an iron post, $2\frac{1}{2}$ ins. diam., firmly set, mkd. and witnessed as described in the concurrent survey of T. 10 S., R. 18 W.

N. $0^{\circ} 14'$ E., bet. secs. 31 and 36.

Over rolling desert land, through scattering of sagebrush and shadscale.

- 8.30 Small gully, drains E.
- 19.80 Old road, bears NW. and SE.
- 25.20 Gully, drains SE.
- 39.98 The $\frac{1}{2}$ sec. cor. of secs. 31 and 36, monumented with a quartzite stone, $26 \times 13 \times 12$ ins., firmly set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground, and in a mound of stone, $3\frac{1}{2}$ ft. base to top, with brass cap mkd.

T9S
R18W R17W
 $\frac{1}{2}$
S36 | S31
1962

Deposit original rock cor. alongside the iron post.

N. $0^{\circ} 13'$ E., beginning new measurement.

Dependent Resurvey of the West Boundary,
T. 9 S., R. 17 W.

CHAINS

Over rolling desert land.

- 7.90 Gully, drains E.
23.40 Gully, drains E.
31.10 Old dirt road, bears E. and W.
39.97 The cor. of secs. 25, 30, 31 and 36, monumented with a limestone, 24x14x4 ins., firmly set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 15 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T9S
R18W R17W
S25 | S30
S36 | S31

1962

Deposit original cor. alongside the iron post.

Land, rolling desert.
Soil, gravel and rock.
No timber.
Undergrowth, sagebrush and shadscale.

N. 0° 15' E., bet. secs. 25 and 30.

Over rolling desert land, through shadscale and sagebrush.

- 3.80 Gully drains E.
21.70 Gully, drains SE.
33.50 Gully drains SE.
40.07 The ¼ sec. cor. of secs. 25 and 30, monumented with a quartzite stone, 24x12x12 ins., firmly set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T9S
R18W R17W
¼
S25 | S30

1962

Deposit original rock cor. alongside the iron post.

N. 0° 19' E., beginning new measurement.

Dependent Resurvey of the West Boundary
T. 9 S., R. 17 W.

Over rolling desert land.

- 5.40 Gully, drains SE.
13.10 Gully, drains SE.
26.80 Gully, drains SE.

40.00 The cor. of secs. 19, 24, 25 and 30, monumented with a quartzite stone, 14x12x6 ins., firmly set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T9S
R18W R17W

S24 S19
S25 S30

1962

Deposit original rock cor. alongside the iron post.

Land, rolling desert.
Soil, gravel and sand.
No timber.
Undergrowth, sagebrush and shadscale.

N. 0° 05' E., bet. secs. 19 and 24.

Over rolling desert land covered with sagebrush, shadscale and greasewood.

- 2.00 Gully, drains SE.
5.10 Gully, drains SE.
20.10 Gully, drains SE.

33.40 Old dirt road, bears NW. and SE.

40.02 The ¼ sec. cor. of secs. 19 and 24, monumented with a limestone, 24x12x12 ins., firmly set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 25 ins. in the ground with brass cap mkd.

T9S
R18W R17W

S24 S19

1962

Dependent Resurvey of the West Boundary
T. 9 S., R. 17 W.

CHAINS

Deposit original rock cor. alongside the iron post.

N. 0° 04' E., beginning new measurement.

Over rolling desert land.

24.50 Gully, drains SE.

28.60 Old dirt road, bears NE. and SW.

33.80 Gully drains SE.

40.15 The cor. of secs. 13, 18, 19 and 24, monumented with a limestone, 18x11x10 ins., firmly set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T9S
R18W R17W

S13	S18
S24	S19

1962

Deposit original stone cor. alongside the iron post.

Land, rolling desert, with slight incline to NW.
Soil, gravel and sand.
No timber.
Undergrowth, sagebrush, shadscale and greasewood.

N. 0° 02' E., bet. secs. 13 and 18.

Over rolling desert land with gradual ascent of 65 ft. over SE. slope through scattered sage, shadscale and greasewood.

4.20 Gully, drains SE.

8.40 Old dirt road, bears NW. and SE.

20.80 Gully, drains SE.

40.02 The ½ sec. cor. of secs. 13 and 18, monumented with a limestone, 14x10x10 ins., firmly set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground to bedrock, and in a mound of stone, 3½ ft. base to top, with brass cap mkd.

Dependent Resurvey of the West Boundary
of T. 9 S., R. 17 W.

CHAINS

T9S
R18W R17W
 $\frac{1}{2}$
S13|S18
1962

Deposit original stone cor. alongside iron post.

North, beginning new measurement.

Enter rolling foothills; asc. 45 ft. over gradual SE. slope.

- 9.00 Gully, drains SE., continue ascent.
- 10.60 Old dirt road, bears NW. and SE.
- 14.70 Gully, drains SE., continue ascent.
- 18.20 Top of spur, projects SE.; desc. 225 ft. over NE. slope.
- 23.90 Gully, drains NE., continue descent.
- 40.20 The cor. of secs. 7, 12, 13 and 18, monumented with a limestone, 24x12x12 ins., firmly set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T9S
R18W R17W
S12|S7
S13|S18
1962

Deposit original stone cor. alongside iron post.

Land, rolling desert and rolling foothills.
Soil, gravel, sand and rock.
No timber.
Undergrowth, sagebrush, shadscale and greasewood.

N. 0° 01' E., bet. secs. 7 and 12.

Over rolling mountain land.

Desc. 150 ft. over NE. slope through sagebrush, shadscale, and greasewood.

- 15.70 Old overland dirt road, bears NW. and SE.
- 28.90 Bottom of Overland Canyon, drains SE.; asc. 240 ft. over SW. slope.

Dependent Resurvey of the West Boundary
of T. 9 S., R 17 W.

CHAINS

- 39.99 The $\frac{1}{4}$ sec. cor. of secs. 7 and 12, monumented with a quartzite stone, 24x12x12 ins., firmly set, mkd. and witnessed as described in the official record.
- At the cor. point
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 12 ins. in the ground to bedrock and in a mound of stone, $3\frac{1}{2}$ ft. base to top, with brass cap mkd.

T9S
R18W R17W
 $\frac{1}{4}$
S12|S7
1962

Deposit original cor. alongside iron post.

N. $0^{\circ} 05'$ E., beginning new measurement.

Asc. 50 ft. over SW. slope, through sagebrush and shadscale.

- 10.70 Top of spur slopes W.; desc. 35 ft. over NW. slope.
- 20.10 Old dirt road, bears NE. and SW.
- 20.20 Gully, drains SW.; asc. 185 ft. over SE. slope.
- 40.00 Point for the cor. of secs. 1 and 12, T. 9 S., R. 18 W., 40.00 chs. northing from the $\frac{1}{4}$ sec. cor. of secs. 7 and 12.
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 16 ins. in the ground to bedrock and in a mound of stone, 3 ft. base to top with brass cap mkd.

T9S
R18W R17W
|
S1
|
S12
|
1962

- 40.43 Point for the cor. of secs. 6, 7 and 12 at proportionate distance. There is no remaining evidence of original cor. This cor. will now function as the cor. of secs. 6 and 7, T. 9 S., R. 17 W. only.
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 12 ins. in the ground to bedrock, and in a mound of stone, $3\frac{1}{2}$ ft. base to top, with brass cap mkd.

T9S
R18W R17W
|
S6
|
S7
|
1962

Dependent Resurvey of the West Boundary
of T. 9 S., R. 17 W.

CHAINS

Land, mountainous.
Soil, rocky.
No timber.
Undergrowth, sagebrush and shadscale.

N. 0° 05' E., along the W. bdy. of sec. 6.

Over mountainous land.

Asc. 190 ft. over S. slope, through scattered timber,
greasewood, shadscale and sagebrush.

19.60 Top of spur, projects SE.; desc. 115 ft. along E. slope.

32.30 Old mining road, bears NW. and SE., along bottom of
canyon draining SE.; asc. 140 ft. over point of spur,
sloping S.

37.00 Same mining road, bears E. and W.

39.57 Point for the E. $\frac{1}{4}$ sec. cor. of secs. 1, T. 9 S., R. 18
W., at 40.00 chs., northing from the cor. of secs. 1 and
12.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins.
in the ground to bedrock and in a mound of stone, 4 ft.
base to top, with brass cap mkd.

T9S
R18W R17W
 $\frac{1}{4}$ |
S1 |
1962

40.43 Point for the $\frac{1}{4}$ sec. cor. of secs. 1 and 6, at pro-
portionate distance; there is no remaining evidence
of original cor. This cor. will now function as the
W. $\frac{1}{4}$ sec. cor. of sec. 6, T. 9 S., R. 17 W. only.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 16 ins.
in the ground to bedrock and in a mound of stone, $3\frac{1}{2}$ ft.
base to top, with brass cap mkd.

T9S
R18W R17W
 $\frac{1}{4}$ |
S6 |
1962

From which,

Corner number 2 of claim 5885, Fortuna, bears N.
9° 20' E., 10.16 chains dist., and is monumented
with a pine post, 5x5 ins., 3 ft. above ground and
mkd. 2-5885 on E. face.

Desc. 50 ft. over NW. slope.

46.10 Bottom of canyon, drains SW.; asc. 75 ft. over SE. slope
changing to an E. slope.

Dependent Resurvey of the West Boundary
of T. 9 S., R. 17 W.

CHAINS

- 53.30 Same canyon, drains SE.; enter dense timber; asc. slightly over SW. slope.
- 57.10 Same canyon, drains SW.; asc. 320 ft. along E. slope.
- 77.70 Spur, projects E.; desc. 60 ft. over N. slope.
- 79.20 Same canyon, drains SE.; asc. 30 ft. over SW. slope.
- 80.86 The cor. of Tps. 8 and 9 S., Rs. 17 and 18 W., monumented with an iron post, 3 ins. diam., firmly set, mkd. and witnessed as described in the official record of the 1925 survey of T. 8 S., R. 18 W.
- Land, mountainous.
Soil, rock and gravel.
Timber, juniper and pinon.
Undergrowth, sagebrush, shadscale and greasewood.

Dependent Resurvey of the East Bdy. of T. 9 S., R. 19 W.

Reestablishment of the Survey Executed by J. Gorlinski in 1875 and T. C. Bailey in 1882.

From the cor. of Tps. 9 and 10 S., Rs. 18 and 19 W., monumented with an iron post, 2½ ins. diam., firmly set, mkd. and witnessed as described in the concurrent survey of T. 10 S., R. 18 W.

N. 0° 08' E., along E. bdy. of sec. 36.

Over rolling W. slope through sagebrush and dense timber.

- 21.00 Old dirt road, bears NW. and SE.

- 40.37 The ½ sec. cor. of secs. 31 and 36, monumented with a limestone, 14x10x4 ins., firmly set, mkd. and witnessed as described in the official record. This cor. will now function as the E. ½ sec. cor. of sec. 36, T. 9 S., R. 19 W. only.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, with brass cap mkd.

T9S
R19W R18W
½ |
S36 |
1962

Deposit original cor. alongside iron post.

N. 0° 06' E., beginning new measurement.

Dependent Resurvey of the East Boundary
of T. 9 S., R. 19 W.

CHAINS

Continue through dense timber and sagebrush.

Desc. 20 ft. along W. slope.

- 11.20 Jeep trail, bears N. 65° W. and S. 65° E.; asc. 140 ft. along rolling W. slope.
- 17.70 Wash, 50 lks. wide, 1 ft. deep, drains W., continue ascent.
- 20.70 Wash, 40 lks. wide, 2 ft. deep, drains W., continue ascent.
- 33.50 Small wash, drains W., continue ascent.
- 40.15 The cor. of secs. 25, 30, 31 and 36, monumented with a limestone, 18x12x10 ins., firmly set, mkd. and witnessed as described in the official record. This cor. will now function as the cor. of secs. 25 and 36 of T. 9 S., R. 19 W. only.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T9S
R19W R18W
S25
S36
1962

From which,

A juniper 8 ins. diam., bears N. 54° 45' W., 35 lks. dist., mkd. T9S R19W S25 BT.

Deposit original cor. alongside iron post.

Land, rolling foothills.
Soil, gravel and clay.
Timber, pinon and juniper.
Undergrowth, sagebrush.

N. 0° 01' W., along E. bdy. of sec. 25.

Asc. 20 ft. over rolling S. slope through dense timber.

- 2.30 Wash, 15 lks. wide, 3 ft. deep, drains W., continue ascent.
- 8.30 Old dirt wood road, bears E. and W.; thence along level land.
- 15.40 Desc. 30 ft. over N. slope.
- 18.40 Unimproved jeep trail bears NW. and SE.

Dependent Resurvey of the East Boundary
of T. 9 S., R. 19 W.

CHAINS

- 21.30 Wash, 20 lks. wide, 2 ft. deep in Simonson Canyon,
drains W.; asc. 25 ft. over gentle S. slope.
- 22.70 Top of spur, slopes W.; desc. 75 ft. over gentle N.
slope.
- 40.15 The $\frac{1}{2}$ sec. cor. of secs. 25 and 30, monumented with a
limestone, 14x8x5 ins., firmly set, mkd. and witnessed
as described in the official record. This cor. will
now function as the E. $\frac{1}{2}$ sec. cor. of sec. 25, T. 9 S.,
R. 19 W. only.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 22 ins.
in the ground, and in a collar of stone to top, with
brass cap mkd.

T9S
R19W R18W
 $\frac{1}{2}$ |
S25 |
1962

Deposit original cor. alongside iron post.

N. $0^{\circ} 01'$ W., beginning new measurement.

Desc. 20 ft. over gentle NW. slope.

- 1.00 Wash, 10 lks. wide, 1 ft. deep, drains irregularly N.
- 5.40 Same wash, 10 lks. wide, 1 ft. deep, drains N.
- 8.00 Draw, drains W.; asc. 15 ft. over gentle SW. slope.
- 9.10 Wash, 10 lks. wide, 1 ft. deep, drains S. 70° W.
- 15.40 Wash, 20 lks. wide, 2 ft. deep, drains W.
- 21.10 Wash, 10 lks. wide, 1 ft. deep, drains W.
- 24.80 Old dirt road, bears NW. and SE.; desc. 60 ft. over
gentle NW. slope.
- 31.20 Wash, 20 lks. wide, 2 ft. deep, drains NW. about 3.00
chs. to junction of another wash; thence W.
- 35.90 Wash, 20 lks. wide, 4 ft. deep, drains W.; asc. 10 ft.
over S. slope.
- 37.30 Small spur, slopes W.; desc. 20 ft. over N. slope.
- 38.80 Wash, 10 lks. wide, 3 ft. deep, drains SW.; asc. 20
ft. over gentle S. slope.
- 40.16 The cor. of secs. 19, 24, 25 and 30, monumented with a
limestone, 10x12x6 ins., firmly set, mkd. and witnessed
as described in the official record. This cor. will
now function as the cor. of secs. 24 and 25, T. 9 S.,
R. 19 W. only.

Dependent Resurvey of the East Boundary
of T. 9 S., R. 19 W.

CHAINS

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins. in the ground to bedrock and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T9S
R19W R18W

S24
S25

1962

Deposit original cor. alongside iron post.

Land, rolling.
Soil, gravel and clay.
Timber, dense pinon and juniper.
Undergrowth, sagebrush.

N. $0^{\circ} 09'$ W., along E. bdy. of sec. 24.

Over rolling land through dense timber.

- 14.50 Wash, 20 lks. wide, 2 ft. deep, drains W.
24.50 Wash, 30 lks. wide, 2 ft. deep, drains W.
25.50 Old road, bears E. and W.
27.80 Wash, 10 lks. wide, 2 ft. deep, drains W.
40.20 The $\frac{1}{4}$ sec. cor. of secs. 19 and 24, monumented with a limestone, 15x10x9 ins., firmly set, mkd. and witnessed as described in the official record. This cor. will now function as the E. $\frac{1}{4}$ sec. cor. of sec. 24, T. 9 S., R. 19 W. only.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins. in the ground to bedrock and in a mound of stone, $3\frac{1}{2}$ ft. base to top, with brass cap mkd.

T9S
R19W R18W

$\frac{1}{4}$
S24

1962

From which,

A juniper 5 ins. diam., bears S. $77^{\circ} 30'$ W., 58 lks. dist., mkd. $\frac{1}{4}$ S24 BT.

Deposit original rock cor. alongside iron post.

N. $0^{\circ} 07'$ W., beginning new measurement.

Desc. 80 ft. over NW. slope, through scattered timber.

- 9.50 Wash, 40 lks. wide, 4 ft. deep; in bottom of Kelly Canyon, drains N. 80° W.

Dependent Resurvey of the East Boundary
of T. 9 S., R. 19 W.

CHAINS

- 11.50 Unimproved dirt road, bears NW. and SE.; asc. 100 ft. over SW. slope.
- 13.30 Wash, 10 lks. wide, 3 ft. deep, drains SW., continue ascent.
- 22.20 Spur, slopes W.; desc. 195 ft. over N. slope.
- 30.50 Base of descent; thence along gentle W. slope.
- 39.59 The cor. of secs. 13, 18, 19 and 24, monumented with a limestone, 14x12x4 ins., firmly set, mkd. and witnessed as described in the official record. This cor. will now function as the cor. of secs. 13 and 24, T. 9 S., R. 19 W. only.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground with brass cap mkd.

T9S
R19W R18W

S13
S24

1962

Deposit original cor. alongside iron post.

Land, rolling.

Soil, rocky loam.

Timber, dense juniper and pinon S. portion; scattered N. portion.

Undergrowth, sagebrush.

N. 0° 08' E., along E. bdy. of sec. 13.

Over rolling land through widely scattered timber.

- 5.40 Wash, 10 lks. wide, 1 ft. deep, drains W.
- 17.60 Wash, 20 lks. wide, 4 ft. deep, drains W.
- 19.60 Wash, 10 lks. wide, 1 ft. deep, drains W.
- 22.80 Unimproved dirt road, bears E. and W.
- 26.40 Wash, 10 lks. wide, 3 ft. deep, drains S.
- 29.30 Wash, 20 lks. wide, 1 ft. deep, drains SW.
- 34.70 Unimproved dirt road, bears E. and W.
- 37.00 Wash, 20 lks. wide, 1 ft. deep, drains W.
- 40.15 Point for the ½ sec. cor. of secs. 13 and 18, at proportionate dist. There is no remaining evidence of the original cor. This cor. will now function as the E. ½ sec. cor. of sec. 13, T. 9 S., R. 19 W. only.

Dependent Resurvey of the East Boundary
of T. 9 S., R. 19 W.

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 8 ins. in the ground to bedrock and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T9S
R19W R18W
 $\frac{1}{2}$ |
S13 |

1962

Raise a mound of stone, $3\frac{1}{2}$ ft. base, 3 ft. high, W. of cor.

Continue over rolling terrain.

- 40.90 Wash, 10 lks. wide, 2 ft. deep, drains W.
43.50 Wash, 15 lks. wide, 2 ft. deep, drains SW.
49.30 Wash, 10 lks. wide, 1 ft. deep, drains W.
56.50 Wash, 10 lks. wide, 2 ft. deep, drains W.
58.10 Unimproved dirt road, bears E. and W.
62.50 Wash, 10 lks. wide, 1 ft. deep, drains W.
68.80 Wash, 10 lks. wide, 2 ft. deep, drains W.
74.94 Wash, 15 lks. wide, 2 ft. deep, drains W.
80.30 The cor. of secs. 7, 12, 13 and 18, monumented with a limestone, 16x12x6 ins., firmly set, mkd. and witnessed as described in the official record. This cor. will now function as the cor. of secs. 12 and 13, T. 9 S., R. 19 only.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins. in the ground to bedrock and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T9S
R19W R18W
S12 |
S13 |

1962

Deposit original rock cor. alongside iron post.

Land, rolling.
Soil, rocky loam,
Timber, scattered juniper and pinon.
Undergrowth, sagebrush and shadscale.

N. 0° 11' E., along the E. bdy. of sec. 12.

Desc. 95 ft. over rolling land through dense sagebrush over N. slope.

Dependent Resurvey of the East Boundary
of T. 9 S., R. 19 W.

CHAINS	
7.10	Wash, 5 lks. wide, 1 ft. deep, drains N.; continue descent.
19.20	Wash, 25 lks. wide, 5 ft. deep, drains N. 70° W.; asc. 90 ft. over SW. slope.
21.90	Wash, drains SW.; continue ascent.
28.50	Wash, 10 lks. wide, 2 ft. deep, drains SW.; thence over rolling land.
39.30	Wash, 20 lks. wide, 2 ft. deep, drains SW.
40.11	<p>The $\frac{1}{4}$ sec. cor. of secs. 7 and 12, monumented with a limestone, 14x8x6 ins., firmly set, mkd. and witnessed as described in the official record. This cor. will now function as the E. $\frac{1}{4}$ sec. cor. of sec. 12, T. 9 S., R. 19 W. only.</p> <p>At the cor. point</p> <p>Set an iron post, 30 ins. long, 2$\frac{1}{2}$ ins. diam., 8 ins. in the ground to bedrock, and in a mound of stone, 3$\frac{1}{2}$ ft. base to top, with brass cap mkd.</p> <div style="text-align: center;"> <p>T9S R19W R18W $\frac{1}{4}$ S12 1962</p> </div> <p>Deposit original rock cor. alongside iron post.</p> <hr style="width: 20%; margin: 10px auto;"/>
	N. 0° 08' E., beginning new measurement.
	Over rolling land through dense sagebrush and shadscale.
6.90	Wash, 10 lks. wide, 2 ft. deep, drains W.
10.40	Wash, 10 lks. wide, 1 ft. deep, drains W.
11.70	Old wood road, bears N. 70° E. and S. 70° E.
20.80	Draw, drains W.; asc. 65 ft. over S. slope.
24.80	Rocky spur, slopes S. 80° W.; desc. 155 ft. over NW. slope.
39.91	<p>The cor. of secs. 1, 6, 7 and 12, monumented with a limestone, 12x10x6 ins., firmly set, mkd. and witnessed as described in the official record. This cor. will now function as the cor. of secs. 1 and 12, T. 9 S., R. 19 W. only.</p> <p>At the cor. point</p> <p>Set an iron post, 30 ins. long, 2$\frac{1}{2}$ ins. diam., 8 ins. in the ground to bedrock and in a mound of stone, 3$\frac{1}{2}$ ft. base to top, with brass cap mkd.</p>

Dependent Resurvey of the East Boundary
of T. 9 S., R. 19 W.

CHAINS

T9S
R19W R18W

S1
S12

1962

From which,

A juniper, 14 ins. diam., bears S. 45° W., 11 lks.
dist., mkd. T9S R19W S12 BT.

Deposit original rock cor. alongside iron post.

Land, rolling.

Soil, rocky and gravelly.

Timber, widely scattered pinon and juniper.

Undergrowth, sagebrush and shadscale.

N. 0° 01' E., along the E. bdy. of sec. 1.

Over rolling land.

Desc. 65 ft. over N. slope.

4.40 Draw, drains W.; continue descent.

19.00 Wash, 10 lks. wide, 1 ft. deep, drains W.

28.50 Wash, 15 lks. wide, 1 ft. deep, drains W.

37.60 Wash, 10 lks. wide, 1 ft. deep, drains W.

38.70 Wood road, bears E. and W.

40.09 The $\frac{1}{2}$ sec. cor. of secs. 1 and 6, monumented with a
limestone, 16x12x5 ins., firmly set, mkd. and witnessed
as described in the official record. This cor. will
now function as the E. $\frac{1}{2}$ sec. cor. of sec. 1, T. 9 S.,
R. 19 W. only.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 8 ins.
in the ground to bedrock and in a mound of stone, 4 ft.
base to top, with brass cap mkd.

T9S
R19W R18W

$\frac{1}{2}$
S1

1962

Deposit original rock cor. alongside iron post.

N. 0° 06' E., beginning new measurement.

Gradual descent over rolling land.

Dependent Resurvey of the East Boundary
of T. 9 S., R. 19 W.

CHAINS	
.30	Wash, 15 lks. wide, 3 ft. deep, drains W.
7.90	Wash, 10 lks. wide, 2 ft. deep, drains W.
10.10	Wash, 20 lks. wide, 3 ft. deep, drains W.
24.20	Wash, 15 lks. wide, 1 ft. deep, drains SW.
27.80	Wash, 5 lks. wide, 1 ft. deep, drains N. 70° W.
29.60	Wash, 10 lks. wide, 3 ft. deep, drains W.
31.30	Unimproved dirt road, bears E. and W.
33.60	Wash, 15 lks. wide, 2 ft. deep, drains W.
40.14	<p>The cor. of Tps. 8 and 9 S., Rs. 18 and 19 W., monumented with an iron post, 3 ins. diam., firmly set, mkd. and witnessed as described in the official record of the 1925 survey.</p> <p>Land, rolling. Soil, rocky loam. No timber. Undergrowth, sagebrush and shadscale.</p>
Survey of the S. bdy. of T. 9 S., R. 18 W.	
40.00	<p>From the cor. of Tps. 9 and 10 S., Rs. 17 and 18 W., heretofore described.</p> <p>N. 89° 56' W., bet. secs. 1 and 36.</p> <p>Over rolling desert land.</p> <p>Asc. 200 ft. over gradual E. slope through sagebrush and shadscale.</p> <p>Point for the ¼ sec. cor. of secs. 1 and 36.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to bedrock and in a mound of stone, 3 ft. base to top, with brass cap mkd.</p> <p style="text-align: center;">T9S R18W ¼ <u>S36</u> S1 T10S 1962</p> <p>Asc. 195 ft. over gradual E. slope.</p>
45.50	Small wash, drains N. 80° E.
58.80	Wash, 40 lks. wide, 4 ft. deep, drains N. 70° E.

Survey of the South Boundar of T. 9 S., R. 18 W.

CHAINS

- 76.50 Wash, 20 lks. wide, 3 ft. deep, drains N. 70° E., enter juniper and pinon.
- 80.00 Point for the cor. of secs. 1, 2, 35 and 36.
- Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground to bedrock and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T9S R18W

S35	S36
S2	S1

T10S

1962

Land, mountainous.
 Soil, gravel clay.
 Timber, pinon and juniper W. portion; no timber E. portion.
 Undergrowth, sagebrush and shadscale.

N. 89° 56' W., bet. secs. 2 and 35.

Over mountainous land.

Asc. gentle E. slope through scrub timber.

- 2.50 Base of ascent, bears N. and S.; asc. 250 ft. over E. slope.
- 15.00 Spur, slopes S.; asc. 100 ft. along S. slope.
- 22.00 Swale, drains S.; asc. 150 ft. over E. slope.
- 32.00 Spur, slopes S.; desc. 150 ft. over W. slope.
- 40.00 Point for the ¼ sec. cor. of secs. 2 and 35.
- Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 3½ ft. base to top, with brass cap mkd.

T9S R18W

¼	S35
S2	S1

1962

Desc. 30 ft. over W. slope.

- 41.00 Bottom of draw, drains S.; asc. 175 ft. over E. slope.
- 50.00 Spur, slopes S.; desc. 100 ft. over W. slope.
- 55.00 Wash, drains S.; asc. 300 ft. along S. slope.
- 68.80 Rocky spur, slopes S.; desc. 175 ft. along ledgy S. slope.

Survey of the South Boundary
of T. 9 S., R. 18 W.

CHAINS	
78.30	Small draw, drains S.; asc. 30 ft. over E. slope.
80.00	Point for the cor. of secs. 2, 3, 34 and 35.
	Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock and in a mound of stone, 3½ ft. base to top, with brass cap mkd.
	T9S R18W
	$\frac{S34 S35}{S3 S2}$
	T10S
	1962
	<p>Land, mountainous. Soil, rocky. Timber, pinon and juniper. Undergrowth, sagebrush.</p>
	N. 89° 56' W., bet. secs. 3 and 34.
	Over mountainous land.
	Asc. 150 ft. over ledgy S. slope through pinon and juniper timber.
7.00	Asc. along ledges facing S.
15.00	Leave ledges; desc. 100 ft. along S. slope.
21.00	Draw, drains S. about 10 chains; thence E.; asc. 400 ft. over broken E. slope.
38.00	Ledges facing E.; continue ascent.
40.00	Point for the ¼ sec. cor. of secs. 3 and 34.
	Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground to bedrock, and in a mound of stone, 3½ ft. base to top, with brass cap mkd.
	T9S R18W
	$\frac{\frac{1}{4} \cdot S34}{S3}$
	T10S
	1962
42.60	Small ledge point extends S. 50 lks. dist. to end; asc. 200 ft. along S. slope.
61.20	Top of ascent; desc. 400 ft. over SW. slope.
80.00	Bottom of draw, drains S.
	Point for the cor. of secs. 3, 4, 33 and 34.
	Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to bedrock, and in a mound of stone, 3½ ft. base to top, with brass cap mkd.

Survey of the South Boundary
of T. 9 S., R. 18 W.

CHAINS

T9S R18W

S33	S34
S4	S3

T10S

1962

Land, mountainous.
Soil, clay, rock and gravel.
Timber, pinon and juniper.
Undergrowth, sagebrush.

N. 89° 56' W., bet. secs. 4 and 33.

Over mountainous land.

Asc. 200 ft. over SE. slope.

10.00 Cross bottom of canyon, drains SE.; asc. 800 ft. over NE. slope.

32.00 Slope changes to N.; continue ascent.

40.00 Point for the $\frac{1}{2}$ sec. cor. of secs. 4 and 33.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins. in the ground to bedrock and in a mound of stone, $3\frac{1}{2}$ ft. base to top, with brass cap mkd.

T9S R18W

$\frac{1}{2}$	S33	
	S4	BT.

T10S

1962

From which,

A pinon, 12 ins. diam., bears S. 45° W., 72 lks. dist., mkd. $\frac{1}{2}$ S4 BT.

A pinon, 8 ins. diam., bears N. 15° W., 58 lks. dist., mkd. $\frac{1}{2}$ S33 BT.

Asc. 210 ft. over NE. slope, through dense timber.

76.10 Slope changes to N.; continue ascent.

80.00 Point for the cor. of secs. 4, 5, 32 and 33.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 12 ins. in the ground to bedrock, and in a mound of stone, $3\frac{1}{2}$ ft. base to top, with brass cap mkd.

T9S R18W

S32	S33
S5	S4

T10S

1962

From which,

Survey of the South Boundary
of T. 9 S., R. 18 W.

CHAINS

A pine, 16 ins. diam., bears N. 89° 50' W., 189
lks. dist., mkd. T9S R18W S32 BT.

A pine, 18 ins. diam., bears S. 31° 25' E., 140
lks. dist., mkd. T10S R18W S4 BT.

A mahogany, 8 ins. diam., bears N. 70° 57' E., 45
lks. dist., mkd. T9S R18W S33 BT.

Land, mountainous.
Soil, gravel and rock.
Timber, pine and mahogany.
Undergrowth, serviceberry bush.

N. 89° 56' W., bet. secs. 5 and 32.

Over mountainous land.

Asc. 40 ft. over NE. slope.

2.90 Main ridge of Deep Creek Mountain, bears N. and S.; desc.
40 ft. along N. slope.

4.60 Desc. 400 ft. over W. slope, through dense mahogany,
junipers, and pinon.

31.20 Rocky spur, slopes NW.; continue descent over SW.
slope.

40.00 Point for the $\frac{1}{2}$ sec. cor. of secs. 5 and 32.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins.
in the ground to bedrock, and in a mound of stone, $3\frac{1}{2}$
ft. base to top, with brass cap mkd.

T9S R18W

$\frac{1}{2}$ $\frac{S32}{S5}$

T10S
1962

From which,

A pinon, 36 ins. diam., bears S. 65° W., 42 lks.
dist., mkd. $\frac{1}{2}$ S5 BT.

A pinon, 24 ins. diam., bears N. 60° W., 123 lks.
dist., mkd. $\frac{1}{2}$ S32 BT.

Desc. 300 ft. over W. slope through dense timber.

67.00 Bottom of canyon drains NW.; asc. 150 ft. over E.
slope.

74.90 Top of spur, slopes NW.; desc. 200 ft. over NW. slope.

80.00 Point for the cor. of secs. 5, 6, 31 and 32.

Survey of the South Boundary
of T. 9 S., R. 18 W.

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground to bedrock, and in a mound of stone, 3½ ft. base to top, with brass cap mkd.

T9S R18W

S31 S32
S6 S5

T10S

1962

Land, mountainous.
Soil, gravel and rock.
Timber, juniper, mahogany and pinon.
Undergrowth, sagebrush.

N. 89° 56' W., bet. secs. 6 and 31.

Over mountainous land.

Desc. 15 ft. over W. slope; through dense timber.

.60 Ravine, drains NW.; asc. 20 ft. over NE. slope.

6.40 Spur, slopes N.; desc. 420 ft. over NW. slope.

40.00 Point for the ¼ sec. cor. of secs. 6 and 31.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T9S R18W

¼ S31
S6

T10S

1962

Raise a mound of stone, 3 ft. base, 2½ ft. high, N. cor.

Desc. 330 ft. over SW. slope.

40.20 Draw, drains NW.; continue descent.

77.00 The cor. of Tps. 9 and 10 S., Rs. 18 and 19 W., monumented with a 2½ in. iron post, set, mkd. and witnessed as described in the 1962 field notes of T. 10 S., R. 18 W.

Land, mountainous.
Soil, gravel and loam.
Timber, pinon and juniper.
Undergrowth, sagebrush.

Survey of a Portion of the Subdivision
of T. 9 S., R. 18 W.

Survey of a portion of the Subdivision
of T. 9 S., R. 18 W.

CHAINS

From the cor. of secs. 1, 2, 35 and 36, on the S. bdy.
of the Tp.

N. 0° 07' E., bet. secs. 35 and 36.

Over mountainous land.

Desc. 95 ft. over N. slope, through scattered timber and
sagebrush.

3.10 Draw, drains NE.; continue descent.

12.00 Wash, 25 lks. wide, 2 ft. deep, drains NE.; asc. 20 ft.
over gentle S. slope.

17.30 Wash, 30 lks. wide, 2 ft. deep, drains E.; continue
ascent.

25.20 Wash, 25 lks. wide, 3 ft. deep, drains E.; continue
over nearly level land.

37.90 Wash, 20 lks. wide, 3 ft. deep, drains E.

40.00 Point for the $\frac{1}{2}$ sec. cor. of secs. 35 and 36.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins.
in the ground to bedrock and in a mound of stone, 3 ft.
base to top, with brass cap mkd.

T9S R18W

$\frac{1}{2}$
S35|S36

1962

Continue over gently rolling land through scattered
timber.

56.80 Draw, drains E.

65.00 Jeep trail, bears E. and W.

69.80 Wash, 40 lks. wide, 2 ft. deep, drains E.

80.00 Point for the cor. of secs. 25, 26, 35 and 36.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 15 ins.
in the ground to bedrock and in a mound of stone, 3 ft.
base to top, with brass cap mkd.

T9S R18W

S26|S25
S35|S36

1962

Land, rolling.
Soil, gravel, sand and clay.
Timber, juniper and pinon.
Undergrowth, sagebrush and shadscale.

From the cor. of secs. 25, 30, 31 and 36, on the E. bdy.
of the Tp.

Survey of a Portion of the Subdivision
of T. 9 S., R. 18 W.

CHAINS

N. 89° 54' W., bet. secs. 25 and 36.

Over rolling desert land, covered with sagebrush and
shadscale.

40.02 Point for the $\frac{1}{4}$ sec. cor. of secs. 25 and 36.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 12 ins.
in the ground to bedrock, and in a mound of stone, 3 ft.
base to top, with brass cap mkd.

T9S R18W

$\frac{1}{4}$ $\frac{S25}{S36}$

1962

43.20 Jeep trail, bears NW. and S.

69.10 Draw, drains E.

79.80 Jeep trail, bears NW. and SE.

80.04 The cor. of secs. 25, 26, 35 and 36.

Land, rolling.

Soil, gravel, sand and clay.

No timber.

Undergrowth, shadscale, greasewood and sagebrush.

From the cor. of secs. 3, 4, 33 and 34, on the S. bdy.
of the Tp.

N. 0° 06' E., bet. secs. 33 and 34.

Over mountainous land.

Asc. 40 ft. over SE. slope; through dense timber.

2.00 Small wash, drains E.; asc. 250 ft. over S. slope.

22.90 Ridge crest, bears E. and W.; desc. 85 ft. over N.
slope.

30.00 Bottom of descent, draw, drains E.; asc. 400 ft. over
S. slope.

37.70 Ridge, bears E. and W.; desc. 90 ft. over N. slope.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 33 and 34.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins.
in the ground to bedrock, and in a mound of stone, $2\frac{1}{2}$
ft. base to top, with brass cap mkd.

T9S R18W

$\frac{1}{4}$
S33|S34

1962

Survey of a Portion of the Subdivision
of T. 9 S., R. 18 W.

CHAINS					
	Desc. 1100 ft. over N. slope, through dense timber.				
65.00	Bottom of canyon, drains NE.; asc. 50 ft. over SE. slope.				
77.50	Spur, slopes E.; desc. 50 ft. over NE. slope.				
80.00	Point for the cor. of secs. 27, 28, 33 and 34.				
	Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground to bedrock, and in a mound of stone, 3½ ft. base to top, with brass cap mkd.				
	<p style="text-align: center;">T9S R18W</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S28</td> <td style="padding: 0 5px;">S27</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S33</td> <td style="padding: 0 5px;">S34</td> </tr> </table> <p style="text-align: center;">1962</p>	S28	S27	S33	S34
S28	S27				
S33	S34				
	<p>From which,</p> <p style="padding-left: 40px;">U.S.M.M. number 2, bears S. 36° 23' W., 56.78 chs. dist.</p>				
	<p>Land, mountainous. Soil, gravel and rock. Timber, juniper, pinon and mahogany. Undergrowth, sagebrush.</p>				
	N. 0° 06' E., bet. secs. 27 and 28.				
	Over mountainous land.				
	Desc. 125 ft. over NE. slope through dense timber.				
7.00	Dry canyon, drains E.; asc. 300 ft. over SE. slope.				
19.00	Top of ascent; desc. 150 ft. over NE. slope.				
27.00	Small draw, drains SE.; asc. 350 ft. over steep S. slope.				
40.00	Point for the ½ sec. cor. of secs. 27 and 28.				
	Set an iron post, 30 ins. long, 2½ ins. diam., 14 ins. in the ground to bedrock, and in a mound of stone, 3½ ft. base to top, with brass cap mkd.				
	<p style="text-align: center;">T9S R18W</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S28</td> <td style="padding: 0 5px;">S27</td> </tr> </table> <p style="text-align: center;">1962</p>	S28	S27		
S28	S27				
	Asc. 300 ft. over S. slope through dense timber.				
50.40	Crest of ridge, bears E. and W.; desc. 600 ft. over N. slope.				
72.00	Small draw, drains NE.; continue descent over NE. slope.				

Survey of a Portion of the Subdivision
of T. 9 S., R. 18 W.

CHAINS

80.00 Point for the cor. of secs. 21, 22, 27 and 28.

Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground to bedrock, and in a mound of stone, 3½ ft. base to top, with brass cap mkd.

T9S R18W

S21	S22
S28	S27

1962

Land, mountainous.
Soil, gravel loam.
Timber, juniper, mahogany and pinon.
Undergrowth, sagebrush.

N. 0° 06' E., bet. secs. 21 and 22.

Over mountainous land.

Desc. 150 ft. over NE. slope through dense timber.

1.20 Small spur slopes NE.; continue descent.

7.00 Bottom of Sheep Canyon, drains E.; asc. 850 ft. over S. slope.

40.00 Point for the ¼ sec. cor. of secs. 21 and 22.

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground to bedrock, and in a mound of stone, 3½ ft. base to top, with brass cap mkd.

T9S R18W

S21	S22
-----	-----

1962

Asc. 150 ft. over S. slope.

49.10 Rocky spur, slopes E.; desc. 50 ft. along E. slope.

59.10 Draw, drains NE.; asc. 50 ft. over SE. slope.

67.10 Spur, slopes NE.; desc. 400 ft. over N. slope.

80.00 Point for the cor. of secs. 15, 16, 21 and 22.

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T9S R18W

S16	S15
S21	S22

1962

Survey of a Portion of the Subdivision
of T. 9 S., R. 18 W.

CHAINS

Land, mountainous.
Soil, gravel and rocky loam.
Timber, juniper, pinon and mahogany.
Undergrowth, sagebrush.

N. 0° 06' E., bet. secs. 15 and 16.

Over mountainous land.

Desc. 30 ft. over N. slope through dense timber.

2.70 Bottom of Bagley Gulch, drains NE.; asc. 150 ft. over SE. slope.

5.30 Small spur, slopes E.; desc. 550 ft. over NE. slope.

8.00 Small draw, drains E.; continue descent.

17.80 Small spur, slopes NE.; continue descent.

40.00 Point for the $\frac{1}{2}$ sec. cor. of secs. 15 and 16.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T9S R18W

$\frac{1}{2}$
S16|S15

1962

Desc. 50 ft. over N. slope.

43.00 Bottom of draw, drains E.; asc. 100 ft. over S. slope, timber becomes scattered.

48.10 Spur, slopes E.; desc. 300 ft. over N. slope.

60.10 Bottom of North Pass Canyon, drains E.; asc. 400 ft. over steep rocky S. slope.

80.00 Point for the cor. of secs. 9, 10, 15 and 16.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T9S R18W

S9|S10
S16|S15

1962

Land, mountainous.
Soil, rocky loam.
Timber, pinon and juniper and mahogany.
Undergrowth, sagebrush.

N. 0° 06' E., bet. secs. 9 and 10.

Survey of a Portion of the Subdivision
of T. 9 S., R. 18 W.

CHAINS

Over mountainous land.

Asc. 20 ft. over S. slope through scattered timber.

.60 Rocky knoll; desc. 90 ft. over N. slope.

7.90 Ravine drains SW.; asc. 295 ft. over steep S. slope.

23.60 Spur, slopes E.; desc. 355 ft. over N. slope.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 9 and 10.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T9S R18W

$\frac{1}{4}$
S9|S10

1962

From which,

U.S.M.M. number 1, bears S. $86^{\circ} 23' 24''$ W., 33.47 chs. dist., monumented with an 8x8 in. post, mkd. USMM 1.

Desc. 10 ft. over N. slope through scattered timber.

40.80 Draw, drains E.; asc. 375 ft. over S. slope.

59.50 Crest of ridge, bears E. and W.; desc. 355 ft. over NE. slope.

67.00 Slope changes to N., continue descent.

80.00 Point for the cor. of secs. 3, 4, 9 and 10.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T9S R18W

$\frac{S4|S3}{S9|S10}$

1962

Land, mountainous.

Soil, gravelly loam.

Timber, pinon and juniper.

Undergrowth, shadscale, sagebrush and greasewood.

N. $0^{\circ} 04'$ E., bet. secs. 3 and 4.

Over mountainous land.

Desc. 135 ft. over N. slope; through scattered timber.

6.00 Bottom of draw, drains NE.; asc. 20 ft. over SE. slope.

Survey of a Portion of the Subdivision
of T. 9 S., R. 18 W.

CHAINS	
10.20	Spur, slopes NE.; desc. 395 ft. over N. slope.
28.70	Bottom of draw, drains NW.; asc. 20 ft. over SW. slope.
36.20	Spur, slopes W.; desc. 65 ft. over N. slope.
40.00	Point for the $\frac{1}{4}$ sec. cor. of secs. 3 and 4.
	Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 16 ins. in the ground, to bedrock, and in a mound of stone, $3\frac{1}{2}$ ft. base to top, with brass cap mkd.
	T9S R18W $\frac{1}{4}$ S4 S3 1962
	Desc. 195 ft. over N. slope.
45.70	Wash, 15 lks. wide, 2 ft. deep, drains NE.; continue descent.
58.30	Bottom of wash, in Unyabi Canyon, 120 lks. wide, 3 ft. deep, drains NE.; continue descent.
62.80	Jeep trail, bears NE. and SW.; continue over rolling land.
81.24	The cor. of secs. 3, 4, 33 and 34, on the N. bdy. of the Tp., monumented with an iron post, 2 ins. diam., firmly set, mkd. and witnessed as described in the official record of the 1925 resurvey.
	Land, mountainous and rolling. Soil, clay and gravelly loam. Timber, pinon and juniper. Undergrowth, sagebrush, shadscale and greasewood.
	From the cor. of secs. 1, 2, 35 and 36, on the N. bdy. of the Tp., monumented with an iron post, 2 ins. diam., firmly set, mkd. and witnessed as described in the official record of the 1925 resurvey.
	S. $0^{\circ} 07'$ W., bet. secs. 1 and 2.
	Over mountainous desert land.
.60	Wash, 10 lks. wide, 3 ft. deep, drains W.; asc. 85 ft. over N. slope.
4.00	Small spur, slopes W.; continue ascent along W. slope.
10.70	Spur, slopes W.; desc. 190 ft. along W. slope.
20.70	Draw, drains W.; asc. 10 ft. along W. slope.
31.00	Spur, slopes S. 30° W.; desc. 95 ft. along E. slope.

Survey of a Portion of the Subdivision
of T. 9 S., R. 18 W.

CHAINS

41.62 Point for the $\frac{1}{4}$ sec. cor. of secs. 1 and 2.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 14 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T9S R18W

$\frac{1}{4}$
S2|S1

1962

Desc. 150 ft. over S. slope.

45.50 Wash, 20 lks. wide, 2 ft. deep, drains SW.; asc. 20 ft. along W. slope.

51.20 Small spur, slopes W.; desc. 350 ft. along W. slope.

74.30 Overland dirt road, bears NW. and E. in bottom of Overland Canyon draining E.; asc. 60 ft. over ledgy N. slope.

78.00 Spur, slopes N. 80° E., 6.00 chs. dist. to wash; desc. 70 ft. over S. slope.

81.62 Point for the cor. of secs. 1, 2, 11 and 12.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T9S R18W

S2|S1
S11|S12

1962

Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.

Land, mountainous.

Soil, gravel loam.

No timber.

Undergrowth, sagebrush, shadscale and greasewood.

From the cor. of secs. 2, 3, 34 and 35, on the N. bdy. of the Tp., monumented with a 2 in. iron post, firmly set, mkd. and witnessed as described in the official record of the 1925 resurvey.

S. $0^\circ 07'$ W., bet. secs. 2 and 3.

Over rolling land through scattered timber and sagebrush.

0.75 Old jeep trail, bears SE. and NW.

3.80 Jeep trail, bears E. and W.

14.90 Small wash, 20 lks. wide, 2 ft. deep, drains E.; asc. 305 ft. over N. slope.

39.80 Small spur, projects W.; continue ascent.

Survey of a Portion of the Subdivision
of T. 9 S., R. 18 W.

CHAINS

41.46 Point for the $\frac{1}{4}$ sec. cor. of secs. 2 and 3.
Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins. in the ground to bedrock, and in a mound of stone, $3\frac{1}{2}$ ft. base to top, with brass cap mkd.

T9S R18W

$$\frac{1}{4}$$
 S3|S2

1962

41.60 Head of ravine, drains NW.; asc. 60 ft. over N. slope.

44.90 Small spur slopes NW.; desc. 65 ft. over SW. slope.

51.30 Ravine, drains W.; asc. 65 ft. over NW. slope.

62.75 Spur, slopes NE.; asc. 145 ft. along E. slope.

64.35 Wash, 15 lks. wide, 1 ft. deep, drains E.

74.60 Rocky spur, slopes SE.; desc. 100 ft. over rocky SW. slope.

81.46 Point for the cor. of secs. 2, 3, 10 and 11.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins. in the ground to bedrock, and in a mound of stone, $3\frac{1}{2}$ ft. base to top, with brass cap mkd.

T9S R18W

$$\frac{S3|S2}{S10|S11}$$

1962

Land, mountainous and rolling.

Soil, gravelly loam.

Timber, juniper and pinon.

Undergrowth, sagebrush, shadscale and greasewood.

From the cor. of secs. 1, 2, 11 and 12.

N. $89^{\circ} 47'$ W., bet. secs. 2 and 11.

Over rolling mountain land.

Asc. 120 ft. along S. slope.

8.80 Spur, slopes S. 50° E.; desc. 35 ft. over W. slope.

12.60 Wash, in draw, drains SE.; asc. 260 ft. along S. slope of spur.

26.50 Wash in draw, drains S. 85° E.; continue ascent along N. slope of draw.

40.01 Point for the $\frac{1}{4}$ sec. cor. of secs. 2 and 11.

Survey of a Portion of the Subdivision
of T. 9 S., R. 18 W.

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., on solid sandstone over an (X) mkd. in the sandstone, and in a mound of stone, $4\frac{1}{2}$ ft. base to top, with brass cap mkd.

T9S R18W

$$\frac{1}{4} \frac{S2}{S11}$$

1962

Asc. 220 ft. over NE. slope.

- 46.60 Small draw, drains E.; continue ascent.
- 53.80 Top of ascent; ridge bears N. and S.; desc. 105 ft. over W. slope, through scattered timber.
- 60.40 Draw, drains S.; asc. 180 ft. over E. slope.
- 67.10 Slope changes to SE.; continue ascent.
- 76.30 Spur, slopes S.; desc. 65 ft. over W. slope.
- 80.02 The cor. of secs. 2, 3, 10 and 11.

Land, mountainous.
Soil, gravel and rocky loam.
Timber, pinon and juniper.
Undergrowth, sagebrush and shadscale.

The $\frac{1}{4}$ sec. cor. of secs. 2 and 35, Tps. 8 and 9 S., R. 18 W., is an iron post, 3 ft. long, 1 in. diam., firmly set, mkd. and witnessed as described in the official record of the 1925 resurvey made by Andrew Nelson.

From this point, U.S.M.M. No. 6, consisting of a mound of stone, bears S. $8^{\circ} 34'$ W., 21.92 chs. dist.

From which,

An old mine shaft, on Lot 45, Overland Lode, 7 ft. diam., 50 ft. deep, bears N. $65^{\circ} E.$, 78 lks. dist. (Record N. $65^{\circ} 08' E.$, 78 lks.)

Cor. No. 4, Gold Spar Lode, Mineral Survey No. 5887, monumented with a mound of stone, no marks, bears N. $55^{\circ} 21' E.$, 5.31 chs. dist. (Record N. $55^{\circ} 21' E.$, 5.32 chs.)

From the cor. of secs. 4, 5, 32 and 33, on the S. bdy. of the Tp.

N. $0^{\circ} 05' E.$, bet. secs. 32 and 33.

Over mountainous land.

Desc. 325 ft. over NE. slope; through dense mahogany, juniper and sagebrush.

Survey of a Portion of the Subdivision
of T. 9 S., R. 18 W.

CHAINS		
14.00	Head of canyon drains E.; asc. 325 ft. over steep S. slope.	
28.35	Crest of ridge, bears E. and W.; desc. 205 ft. over N. slope through medium dense pines.	
40.00	Point for the $\frac{1}{4}$ sec. cor. of secs. 32 and 33. Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.	
	T9S R18W $\frac{1}{4}$ S32 S33 1962	
	Desc. 60 ft. over N. slope.	
43.60	Head of canyon, drains E.; asc. 165 ft. over S. slope, through dense timber.	
55.40	Crest of ridge bears E. and W.; desc. 225 ft. over N. slope.	
72.90	Head of canyon drains E.; asc. 125 ft. over S. slope.	
76.70	Crest of rocky ridge, bears E. and W.; desc. 100 ft. over N. slope.	
80.00	Point for the cor. of secs. 28, 29, 32 and 33. Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 16 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.	
	T9S R18W <u>S29 S28</u> <u>S32 S33</u> 1962	
	Land, mountainous. Soil, gravel and rocky loam. Timber, pinon, juniper and mahogany. Undergrowth, sagebrush.	
	From the cor. of secs. 27, 28, 33 and 34.	
	N. $89^{\circ} 54'$ W., bet. secs. 28 and 33.	
	Over mountainous land.	
	Asc. 315 ft. over NE. slope, through dense timber.	
23.20	Rocky spur slopes N.; desc. 50 ft. over NW. slope.	
30.00	Draw, drains NE.; asc. 180 ft. over NE. slope.	
39.98	Point for the $\frac{1}{4}$ sec. cor. of secs. 28 and 33.	

Survey of a Portion of the Subdivision
of T. 9 S., R. 18 W.

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 16 ins. in the ground to bedrock, and in a mound of stone, $3\frac{1}{2}$ ft. base to top, with brass cap mkd.

T9S R18W

$$\frac{1}{4} \frac{S28}{S33}$$

1962

Desc. 10 ft. along N. slope.

49.10 Bottom of draw, drains NE.; asc. 620 ft. over NE. slope.

59.20 Leave dense timber and enter scattered timber.

64.50 Draw, drains NE.; continue ascent over NE. slope.

79.96 The cor. of secs. 28, 29, 32 and 33.

Land, mountainous.
Soil, gravel loam.
Timber, mahogany, juniper, pinon and pine.
Undergrowth, sagebrush.

N. $0^{\circ} 05'$ E., bet. secs. 28 and 29.

Over mountainous land.

Desc. 250 ft. over N. slope through dense timber.

10.00 Enter scattered mahogany.

18.00 Draw, drains NE.; asc. 130 ft. over SE. slope.

30.00 Spur, slopes E.; desc. 130 ft. over NE. slope.

36.00 Bottom of Dry Canyon, drains SE.; asc. 130 ft. over steep S. slope.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 28 and 29.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 16 ins. in the ground to bedrock, and in a mound of stone, $3\frac{1}{2}$ ft. base to top, with brass cap mkd.

T9S R18W

$$\frac{1}{4} \frac{S29|S28}{S33}$$

1962

Asc. 450 ft. over S. slope.

52.30 Crest of rocky ridge, bears E. and W.; desc. 450 ft. over N. slope.

60.00 Draw, drains NE.; continue descent over NE. slope.

79.00 Xpur slopes E.; continue descent.

Survey of a Portion of the Subdivision
of T. 9 S., R. 18 W.

CHAINS	
80.00	<p>Point for the cor. of secs. 20, 21, 28 and 29.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 16 ins. in the ground to bedrock, and in a mound of stone, 3½ ft. base to top, with brass cap mkd.</p> <p style="text-align: center;">T9S R18W <u>S20</u> <u>S21</u> <u>S29</u> <u>S28</u> 1962</p> <p>Land, mountainous. Soil, gravel and rocky loam. Timber, pine, mahogany, juniper and pinon. Undergrowth, sagebrush.</p>
2.00	<p>From the cor. of secs. 21, 22, 27 and 28.</p> <p>N. 89° 55' W., bet. secs. 21 and 28.</p> <p>Over mountainous land.</p> <p>Asc. 50 ft. over E. slope through dense timber.</p>
16.40	<p>Rocky spur, slopes NE.; desc. 20 ft. along N. slope.</p>
28.40	<p>Draw, drains NE.; asc. 550 ft. over E. slope.</p>
39.98	<p>Spur, slopes NE.; desc. 150 ft. over NW. slope.</p> <p>Point for the ¼ sec. cor. of secs. 21 and 28.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground to bedrock, and in a mound of stone, 3½ ft. base to top, with brass cap mkd.</p> <p style="text-align: center;">T9S R18W ¼ <u>S21</u> <u>S28</u> 1962</p> <p>Desc. 15 ft. over NW. slope.</p>
40.25	<p>Draw, drains NE.; asc. 250 ft. over E. slope.</p>
47.00	<p>Spur, slopes NE.; desc. 20 ft. along N. slope.</p>
60.00	<p>Draw, drains NE.; asc. 350 ft. over NE. slope.</p>
65.00	<p>Spur, slopes NE.; continue ascent.</p>
70.00	<p>Draw, drains NE.; continue ascent.</p>
79.96	<p>The cor. of secs. 20, 21, 28 and 29.</p> <p>Land, mountainous. Soil, gravel rock. Timber, mahogany, juniper and pinon. Undergrowth, sagebrush.</p>

Survey of a Portion of the Subdivision
of T. 9 S., R. 18 W.

CHAINS

N. 0° 05' E., bet. secs. 20 and 21.

Over mountainous land.

Desc. 250 ft. over NE. slope through dense timber.

10.00 Bottom of descent; draw, drains E.; asc. 120 ft. over S. slope.

22.60 Spur, slopes E.; desc. 300 ft. over N. slope.

38.00 Bottom of Sheep Canyon, drains E.; asc. 65 ft. over S. slope.

40.00 Point for the $\frac{1}{2}$ sec. cor. of secs. 20 and 21.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 15 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T9S R18W

$\frac{1}{2}$
S20|S21

1962

Asc. 600 ft. over SE. slope through dense timber.

58.00 Spur, slopes E.; continue ascent.

78.00 Spur, slopes SW.; continue ascent over SW. slope.

80.00 Point for the cor. of secs. 16, 17, 20 and 21.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins. in the ground to bedrock, and in a mound of stone, $2\frac{1}{2}$ ft. base to top, with brass cap mkd.

T9S R18W

S17|S16
S20|S21

1962

Land, mountainous.
Soil, gravel and rock.
Timber, pinon, juniper and mahogany.
Undergrowth, sagebrush.

From the cor. of secs. 15, 16, 21 and 22.

S. 89° 58' W., bet. secs. 16 and 21.

Over mountainous land.

Survey of a Portion of the Subdivision
of T. 9 S., R. 18 W.

CHAINS

Desc. 20 ft. over NW. slope through dense timber.

8.20 Bottom of Bagley Gulch, drains NE.; asc. 400 ft. over E. slope.

21.20 Rocky spur slopes NE.; asc. 65 ft. over E. slope.

32.80 Small spur, slopes NE.; continue ascent over NE. slope.

40.00 Point for the $\frac{1}{2}$ sec. cor. of secs. 16 and 21.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 4 ins. in the ground to bedrock, and in a mound of stone, $4\frac{1}{2}$ ft. base to top, with brass cap mkd.

T9S R18W

$\frac{1}{2}$ $\frac{S16}{S21}$

1962

Asc. 155 ft. along N. slope.

49.50 Top of rocky spur, slopes NW.; desc. 350 ft. over W. slope.

65.00 Bottom of descent, draw, drains S.; asc. 200 ft. over SE. slope.

79.00 Spur, slopes S.; desc. 30 ft. over W. slope.

80.00 The cor. of secs. 16, 17, 20 and 21.

Land, mountainous.
Soil, gravel and rock.
Timber, mahogany, juniper, and pinon.
Undergrowth, sagebrush.

N. $0^{\circ} 05' E.$, bet. secs. 16 and 17.

Over mountainous land.

Asc. 155 ft. along S. slope through dense timber.

11.70 Rocky outcrop, projects NW.; desc. 45 ft. along W. slope.

16.00 Rocky, spur, slopes W.; desc. 550 ft. over N. slope.

40.00 Point for the $\frac{1}{2}$ sec. cor. of secs. 16 and 17.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 16 ins. in the ground to bedrock, and in a mound of stone, $3\frac{1}{2}$ ft. base to top, with brass cap mkd.

T9S R18W

$\frac{1}{2}$ S17|S16

1962

From which,

U.S.C. & G.S. triangulation station "North Peak Tree East Prong" at latitude $40^{\circ} 02' 48.726'' N.$ and longitude $113^{\circ} 53' 38.605'' W.$, bears N. $53^{\circ} 23' W.$, 27.89 chs. dist.

Survey of a Portion of the Subdivision
of T. 9 S., R. 18 W.

PLAN

- Desc. 36 ft. over N. slope.
- 42.00 Bottom of descent, draw, drains E.; asc. 50 ft. over S. slope.
- 47.00 Spur, slopes E.; desc. 10 ft. over N. slope.
- 48.00 Draw, drains SE.; asc. 250 ft. over S. slope.
- 60.00 Runway spur, slopes E.; desc. 430 ft. over NE. slope.
- 72.00 Draw, drains NE.; continue descent.
- 76.50 Spur, slopes NE.; continue descent.
- 81.00 Point for the cor. of secs. 8, 9, 16 and 17.

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 8 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap and.

T9S R18W

S8 S9
S17 S16

1962

Land, mountainous.
Soil, gravel and rock.
Timber, juniper and pinon.
Undergrowth, sagebrush.

From the cor. of secs. 9, 10, 15 and 16.

N. 89° 00' W., bet. secs. 9 and 16.

Over mountainous land.

Desc. 26 ft. over W. slope through scattered timber.

10.00 Draw, drains S.; asc. 200 ft. over E. slope.

15.00 Top of an M., desc. 70 ft. over W. slope.

25.00 Draw, drains S.; asc. 20 ft. over SE. slope.

31.00 Spur, slopes SE.; desc. 100 ft. over SW. slope.

36.00 Point for the N. sec. cor. of secs. 9 and 16.

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 15 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap and.

T9S R18W

S9
S16

1962

Desc. 20 ft. over SW. slope.

Survey of a Portion of the Subdivision
of T. 9 S., R. 18 W.

CHAINS

- 42.00 North Pass Canyon, 20 lks. wide, 3 ft. deep, drains SE.; asc. 175 ft. over NE. slope.
- 55.00 Small spur, slopes N.; desc. 50 ft. over NW. slope.
- 65.00 Draw, drains NE.; asc. 250 ft. over NE. slope.
- 75.10 Spur, slopes NE.; desc. 50 ft. over NW. slope.
- 79.98 The cor. of secs. 8, 9, 16 and 17.
- Land, mountainous.
Soil, gravel and rocky loam.
Timber, pinon and juniper.
Undergrowth, sagebrush and shadscale.
-
- N. 0° 05' E., bet. secs. 8 and 9.
- Over mountainous land.
- Desc. 155 ft. over NW. slope, through scattered pinon and juniper.
- 7.30 Draw, drains NE.; asc. 60 ft. over SE. slope.
- 16.20 Small rocky spur, slopes E.; desc. 80 ft. over N. slope.
- 24.90 North Pass Canyon, drains E.; asc. 140 ft. over SE. slope.
- 40.00 Point for the $\frac{1}{2}$ sec. cor. of secs. 8 and 9.
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 16 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.
- T9S R18W
 $\frac{1}{2}$
S8|S9
1962
- Asc. 155 ft. over SE. slope through scattered timber.
- 53.10 Spur, slopes NE.; desc. 640 ft. over N. slope.
- 80.00 Point for the cor. of secs. 4, 5, 8 and 9.
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.
- T9S R18W
S5|S4
S8|S9
1962
- Raise a mound of stone, 2 ft. base, 1 ft. high, W. of cor.

Survey of a Portion of the Subdivision
of T. 9 S., R. 18 W.

CHAINS

Land, mountainous.
Soil, gravel loam.
Timber, scattered pinon and juniper.
Undergrowth, sagebrush and shadscale.

From the cor. of secs. 3, 4, 9 and 10.

N. 89° 56' W., bet. secs. 4 and 9.

Over mountainous land.

Gradual ascent along N. slope, through scattered timber.

10.70 Head of draw, drains NW.; asc. 45 ft. over E. slope.

14.20 Spur, slopes N.; desc. 280 ft. over NW. slope.

20.50 Draw, drains NW.; continue descent over NW. slope.

27.10 Draw, drains N.; asc. 70 ft. over NE. slope.

34.50 Spur, slopes N.; desc. 65 ft. over NW. slope.

39.94 Point for the $\frac{1}{4}$ sec. cor. of secs. 4 and 9.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 8 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T9S R18W

$\frac{1}{4}$ $\frac{S4}{S9}$

1962

Desc. 45 ft. over NW. slope.

42.30 Draw, drains N.; asc. 155 ft. along N. slope.

50.20 Draw, drains NE.; continue ascent over SE. slope.

59.20 Spur, slopes N. 30° E.; desc. 80 ft. over NW. slope.

68.80 Draw, drains N.; asc. 10 ft. over E. slope.

72.80 Spur, slopes N.; desc. 65 ft. over W. slope.

78.20 Draw, drains N.; asc. 5 ft. over NE. slope.

79.88 The cor. of secs. 4, 5, 8 and 9.

Land, rolling mountains.
Soil, gravelly loam.
Timber, pinon and juniper.
Undergrowth, sagebrush and shadscale.

N. 0° 03' W., bet. secs. 4 and 5.

Survey of a Portion of the Subdivision
of T. 9 S., R. 18 W.

CHAINS

Over mountainous land.

Desc. 50 ft. over N. slope, through scattered pinon and juniper.

.15 Draw, drains NE.; continue descent.

9.20 Fork of Unyabi Canyon, drains NE.; asc. 95 ft. over S. slope.

23.80 Spur, slopes NE.; desc. 170 ft. over N. slope.

38.20 Draw, drains NE.; asc. 10 ft. over S. slope.

40.00 Point for the $\frac{1}{2}$ sec. cor. of secs. 4 and 5.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 16 ins. in the ground, to bedrock and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T9S R18W

$\frac{1}{2}$
S5|S4

1962

Asc. 10 ft. over S. slope, through scattered timber.

42.90 Small spur, slopes NE.; desc. 15 ft. over N. slope.

47.60 Unyabi Canyon, drains NE.; asc. 95 ft. over S. slope.

50.40 Draw, drains SE.; continue ascent.

59.00 Spur, slopes SE.; desc. 150 ft. over NE. slope.

81.16 The cor. of secs. 4, 5, 32 and 33, on the N. bdy. of the Tp., monumented with an iron post, 2 ins. diam., firmly set, mkd. and witnessed as described in the official record of the 1925 survey of T. 8 S., R. 18 W.

Land, mountainous.

Soil, gravel loam.

Timber, scattered pinon and juniper.

Undergrowth, sagebrush.

From the cor. of secs. 5, 6, 31 and 32, on the S. bdy. of the Tp.

N. $0^{\circ} 05'$ E., bet. secs. 31 and 32.

Over mountainous land.

Asc. 5 ft. over SW. slope, through dense timber.

5.10 Spur, projects NW.; desc. 140 ft. over NE. slope.

10.60 Old wood road, bears NW. and SE.

11.30 Draw, drains NW.; asc. 200 ft. over SW. slope.

Survey of a Portion of the Subdivision
of T. 9 S. R. 18 W.

CHAINS

- 16.40 Spur, slopes W.; continue ascent along W. slope.
- 17.50 Draw, drains SW.; continue ascent along SE. slope.
- 24.80 Spur, slopes SW.; asc. along W. slope.
- 34.10 Spur, slopes NW.; desc. 90 ft. over NE. slope.
- 40.00 Point for the $\frac{1}{2}$ sec. cor. of secs. 31 and 32.
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 12 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T9S R18W

$\frac{1}{2}$	
S31	S32
1962	

- 40.10 Wash, 10 lks. wide, 1 ft. deep, drains NW.; asc. 15 ft. over SW. slope.
- 45.10 Spur, slopes NW.; desc. 75 ft. over series of small spurs sloping W.
- 48.90 Wash, 100 lks. wide, 3 ft. deep, drains W.; continue ascent.
- 52.00 Wash, drains W.; asc. 30 ft. over S. slope.
- 57.60 Spur, slopes W.; desc. 2 ft. over N. slope.
- 63.00 Wash, drains W.; asc. 65 ft. over SW. slope.
- 66.70 Old wood road, bears E. and W.; desc. 35 ft. over N. slope.
- 77.40 Draw, drains W.; asc. 50 ft. over SW. slope.
- 80.00 Point for the cor. of secs. 29, 30, 31 and 32.
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T9S R18W

S30	S29
S31	S32

1962

Land, mountainous.
Soil, gravel and rock.
Timber, pinon and juniper.
Undergrowth, sagebrush.

From the cor. of secs. 28, 29, 32 and 33.

N. $89^{\circ} 55'$ W., bet. secs. 29 and 32.

Over mountainous land.

Asc. 50 ft. over NE. slope, through dense timber.

Survey of a Portion of the Subdivision
of T. 9 S., R. 18 W.

CHAINS

7.50 Main ridge of Deep Creek Mountain, bears N. and S.;
desc. 850 ft. over W. slope.

29.00 Bottom of descent; draw, drains NW.; asc. 20 ft. over
E. slope.

35.00 Small spur, slopes NW.; desc. 70 ft. over NW. slope.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 29 and 32.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 16 ins.
in the ground to bedrock, and in a mound of stone, 3 ft.
base to top, with brass cap mkd.

T9S R18W
 $\frac{1}{4}$ $\frac{S29}{S32}$
1962

Desc. 10 ft. over NW. slope.

40.40 Ravine drains NW.; asc. 200 ft. over NE. slope, through
dense timber.

51.70 Spur, slopes NW.; desc. 10 ft. over NW. slope.

55.20 Draw, drains NW.; asc. 20 ft. over NE. slope.

58.70 Rocky spur, slopes NW.; desc. 650 ft. over W. slope.

77.70 Spur, slopes W.; continue descent over SW. slope.

80.00 The cor. of secs. 29, 30, 31 and 32.

Land, mountainous.
Soil, gravel and rock.
Timber, pine, pinon, juniper and mahogany.
Undergrowth, sagebrush.

West, bet. secs. 30 and 31.

Over mountainous land.

Desc. 350 ft. over W. slope through dense timber.

19.50 Draw, drains NW.; asc. 150 ft. over NE. slope.

36.10 Spur, slopes NW.; desc. 25 ft. over W. slope.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 30 and 31.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 10
ins. in the ground to bedrock, and in a mound of stone,
3 ft. base to top, with brass cap mkd.

T9S R18W

$\frac{1}{4}$ $\frac{S30}{S31}$

1962

Survey of a Portion of the Subdivision
of T. 9 S., R. 18 W.

CHAINS

Desc. 250 ft. over W. slope.

76.90 Intersect the W. bdy. of the Tp. Point for the closing
cor. of secs. 30 and 31.

At point of intersection:

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 12 ins.
in the ground to bedrock, and in a mound of stone, 3 ft.
base to top, with brass cap mkd.

T9S
R19W R18W
S36 | S30 C
 | S31 C
1962

From which,

The cor. of secs. 25 and 36, T. 9 S., R. 19 W.,
bears N. $0^{\circ} 06' E.$, 54 lks. dist., hereinbefore
described.

Land, mountainous.

Soil, gravel loam.

Timber, juniper, mahogany, pinon and pine.

Undergrowth, sagebrush.

Point for the W. $\frac{1}{4}$ sec. cor. of sec. 31, at midpoint bet.
the cor. of Tps. 9 and 10 S., Rs. 18 and 19 W., and the
closing cor. of secs. 30 and 31.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins.
in the ground and in a collar of stone, with brass cap
mkd.

T9S
R19W R18W
 $\frac{1}{4}$
| S31
1962

From which,

The E. $\frac{1}{4}$ sec. cor. of secs. 36, T. 9 S., R. 19 W.,
bears N. $0^{\circ} 08' E.$, 38 lks. dist., hereinbefore
described.

From the cor. of secs. 29, 30, 31 and 32.

N. $0^{\circ} 05' E.$, bet. secs. 29 and 30.

Over mountainous land.

Desc. 100 ft. over N. slope through medium dense timber.

2.00 Small draw, drains W.; asc. 50 ft. over SE. slope.

Survey of a Portion of the Subdivision
of T. 9 S.; R. 18 W.

CHAINS

- 6.00 Small spur, slopes W.; desc. 200 ft. over N. slope.
- 18.00 Simonson Canyon, with jeep trail in bottom; drains W.; asc. 100 ft. over SW. slope.
- 23.00 Spur, slopes SW.; asc. 50 ft. along W. slope.
- 30.00 Spur, slopes N. 80° W.; desc. 80 ft. over N. slope.
- 34.00 Small draw, drains W. about 5 chains; thence SW.; asc. 100 ft. over SW. slope.
- 40.00 Point for the $\frac{1}{2}$ sec. cor. of secs. 29 and 30.
- Set an iron post, 30 ins. long, 2½ ins. diam., 3 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.
- T9S R18W
 $\frac{1}{2}$
S30 | S29
1962
- Asc. 140 ft. over SW. slope.
- 47.20 Draw, drains SW.; continue ascent over SE. slope.
- 51.60 Spur, slopes SW.; desc. 15 ft. along W. slope.
- 58.70 Slope changes to NW.; desc. 175 ft. over NW. slope.
- 65.50 Draw, drains W.; asc. 60 ft. over SW. slope.
- 68.80 Slope changes to W.; asc. 15 ft. along W. slope.
- 72.80 Desc. 55 ft. over NW. slope.
- 80.00 Point for the cor. of secs. 19, 20, 29 and 30.
- Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 3½ ft. base to top, with brass cap mkd.
- T9S R18W
S19 | S20
S30 | S29
1962
- Land, mountainous.
Soil, gravelly loam.
Timber, juniper and pinon.
Undergrowth, sagebrush.

From the cor. of secs. 20, 21, 28 and 29.

N. 89° 53' W., bet. secs. 20 and 29.

Over mountainous land.

Survey of a Portion of the Subdivision
of T. 9 S., R. 18 W.

CHAINS	
	Asc. 50 ft. over NE. slope, through dense timber.
10.00	Main ridge of Deep Creek Mountain, bears N. and S.; desc. 350 ft. over NW. slope.
19.50	Crest of ridge, bears N. and S.; continue descent over W. slope.
30.80	Draw, drains NW.; asc. 15 ft. over NE. slope.
33.70	Small spur, slopes NW.; desc. 150 ft. over NW. slope.
39.60	Point selected for the witness $\frac{1}{2}$ sec. cor. of secs. 20 and 29. Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground, and in a collar of stone, 4 ft. base to top, with brass cap mkd. T9S R18W $\frac{1}{2}$ ← $\frac{S20}{S29}$ W C 1962
39.98	Point for the $\frac{1}{2}$ sec. cor. of secs. 20 and 29 falls on face of sheer rock face and cannot be perpetuated. Desc. 800 ft. over NW. slope.
60.00	Draw, drains NW.; desc. along N. slope.
68.00	Spur, slopes NW.; continue descent over NW. slope.
73.00	Draw, drains NW.; continue descent.
78.00	Spur, slopes NW.; continue descent.
79.96	The cor. of secs. 19, 20, 29 and 30. Land, mountainous. Soil, gravel and loam. Timber, juniper, pinon and mahogany. Undergrowth, sagebrush.
	West, bet. secs. 19 and 30. Over mountainous land. Desc. 100 ft. over W. slope, through scattered timber.
10.00	Draw, drains NW.; asc. 150 ft. over NE. slope.
26.60	Spur, slopes NW.; desc. 250 ft. over NW. slope.
33.00	Draw, drains NW.; continue descent.
39.90	Spur, slopes NW.; desc. over NW. slope.

Survey of a Portion of the Subdivision
of T. 9 S., R. 18 W.

CHAINS

40.00

Point for the $\frac{1}{4}$ sec. cor. of secs. 19 and 30.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 8 ins. in the ground to bedrock, and in a mound of stone, $3\frac{1}{2}$ ft. base to top, with brass cap mkd.

T9S R18W

$$\frac{1}{4} \frac{S19}{S30}$$

1962

Desc. 400 ft. over NW. slope, through dense timber.

51.00

Draw, drains N.; continue descent over NW. slope.

61.50

Head of draw, drains SW.; continue descent over W. slope.

77.11

Intersect the W. bdy. of the Tp. Point for the closing cor. of secs. 19 and 30.

At point of intersection.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T9S
R19W R18W
S25 $\frac{S19 C}{S30 C}$

1962

From which,

The cor. of secs. 24 and 25, T. 9 S., R. 19 W., bears N. $0^{\circ} 01' W.$, 73 lks. dist., hereinbefore described.

Land, mountainous.

Soil, gravel loam.

Timber, juniper, pinon and mahogany.

Undergrowth, sagebrush.

Point for the W. $\frac{1}{4}$ sec. cor. of sec. 30 at midpoint, bet. the closing cor. of secs. 30 and 31 and the closing cor. of secs. 19 and 30.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 12 ins. in the ground to bedrock, and in a mound of stone, $3\frac{1}{2}$ ft. base to top, with brass cap mkd.

T9S
R19W R18W

$$\frac{1}{2} | S30$$

1962

From which,

Survey of a Portion of the Subdivision
of T. 9 S., R. 18 W.

CHAINS

The E. $\frac{1}{2}$ sec. cor. of sec. 25, T. 9 S., R. 19 W.,
bears N. $0^{\circ} 01' W.$, 63 lks. dist., hereinbefore
described.

- From the cor. of secs. 19, 20, 29 and 30.
- N. $0^{\circ} 05' E.$, bet. secs. 19 and 20.
- Over mountainous land.
- Desc. 115 ft. over NW. slope, through medium dense
timber.
- 3.60 Small draw, drains NW.; continue descent over NW. slope.
- 10.80 Draw, drains NW.; asc. 10 ft. over SW. slope.
- 12.70 Small spur, slopes NW., about 4 chains to end; desc. 35
ft. over NW. slope.
- 13.80 Draw, drains SW.; asc. 110 ft. over SW. slope.
- 23.80 Spur, slopes W.; desc. 110 ft. over N. slope.
- 28.40 Draw, drains NW.; asc. 25 ft. over SW. slope.
- 32.00 Small draw, drains W.; continue ascent over SW. slope.
- 34.20 Spur, slopes W.; desc. 55 ft. over N. slope.
- 38.80 Kelly Canyon, with jeep trail in bottom, drains W.;
asc. 30 ft. over S. slope.
- 40.00 Point for the $\frac{1}{2}$ sec. cor. of secs. 19 and 20.
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins.
in the ground to bedrock, and in a mound of stone, $3\frac{1}{2}$
ft. base to top, with brass cap mkd.
- T9S R18W
 $\frac{1}{2}$
S19 | S20
1962
- Desc. 20 ft. over N. slope.
- 41.00 Draw, drains SW.; asc. 190 ft. over SW. slope.
- 51.20 Spur, slopes W.; desc. 215 ft. over N. slope.
- 59.30 Draw, drains NW.; continue descent over NW. slope.
- 62.80 Draw, drains W.; asc. 20 ft. over SW. slope.
- 65.70 Spur, slopes S. $80^{\circ} W.$; desc. 70 ft. over NW. slope.

Survey of a Portion of the Subdivision
of T. 9 S., R. 18 W.

CHAINS					
71.80	Draw, drains W.; asc. 80 ft. over S. slope.				
77.50	Spur, slopes W.; desc. 25 ft. over NW. slope.				
80.00	Point for the cor. of secs. 17, 18, 19 and 20.				
	Set an iron post, 30 ins. long, 2½ ins. diam., on solid sandstone, and in a mound of stone, 5 ft. base to top, with brass cap mkd.				
	<p style="text-align: center;">T9S R18W <table style="margin-left: auto; margin-right: auto;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S18</td> <td style="padding: 0 5px;">S17</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S19</td> <td style="padding: 0 5px;">S20</td> </tr> </table> 1962</p>	S18	S17	S19	S20
S18	S17				
S19	S20				
	<p>Land, mountainous. Soil, gravel loam. Timber, pinon and juniper. Undergrowth, sagebrush.</p>				
	From the cor. of secs. 16, 17, 20 and 21.				
	N. 89° 51' W., bet. secs. 17 and 20.				
	Over mountainous land.				
	Desc. 250 ft. over W. slope, through dense timber.				
12.00	Draw, drains S.; asc. 100 ft. over E. slope.				
24.70	Spur, slopes SW.; desc. 125 ft. over NW. slope.				
29.70	Spur, slopes NW.; desc. 360 ft. over W. slope.				
39.96	Point for the ½ sec. cor. of secs. 17 and 20.				
	Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground to bedrock, and in a mound of stone, 3½ ft. base to top, with brass cap mkd.				
	<p style="text-align: center;">T9S R18W <table style="margin-left: auto; margin-right: auto;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">½</td> <td style="padding: 0 5px;">S17</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;"></td> <td style="padding: 0 5px;">S20</td> </tr> </table> 1962</p>	½	S17		S20
½	S17				
	S20				
	Desc. 710 ft. over W. slope.				
64.70	Wash, 50 lks. wide, 2 ft. deep, drains SW.; continue descent along S. slope.				
75.90	Small rocky spur, slopes SW.; continue descent over broken W. slope.				
79.92	The cor. of secs. 17, 18, 19 and 20.				
	<p>Land, mountainous. Soil, gravel and rock. Timber, juniper, pinon and mahogany. Undergrowth, sagebrush.</p>				

Survey of a Portion of the Subdivision
of T. 9 S., R. 18 W.

CHAINS

West, bet. secs. 18 and 19.

Over mountainous land.

Desc. 200 ft. over NW. slope, through dense timber.

- 22.00 Draw, drains SW.; asc. 35 ft. over E. slope.
 30.00 Small spur, slopes SW.; desc. 15 ft. over W. slope.
 33.00 Small draw, drains SW.; desc. 50 ft. over SW. slope.
 37.00 Draw, drains SW.; asc. 50 ft. over SE. slope.
 40.00 Point for the $\frac{1}{2}$ sec. cor. of secs. 18 and 19.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 14 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T9S R18W

$\frac{1}{2}$ $\frac{S18}{S19}$

1962

Asc. 25 ft. over SE. slope, through medium dense timber.

- 44.00 Spur, slopes SW.; desc. 550 ft. over W. slope.
 46.00 Enter draw, drains W.; continue descent along bottom of draw.
 77.41 Intersect the W. bdy. of the Tp.

Point for the closing cor. of secs. 18 and 19.

At point of intersection.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T9S
 R19W R18W
 S24 $\frac{S18}{S19}$ C

1962

From which,

The cor. of secs. 13 and 24, T. 9 S., R. 19 W., bears N. $0^{\circ} 07' W.$, 54 lks. dist., hereinbefore described.

Land, mountainous.
 Soil, gravel loam.
 Timber, juniper, mahogany and pinon.
 Undergrowth, sagebrush.

CHAINS

Point for the W. $\frac{1}{4}$ sec. cor. of sec. 19, at midpoint bet. the closing cor. of secs. 19 and 30 and the closing cor. of secs. 18 and 19.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 15 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T9S
R19W R18W

$\frac{1}{4}$
| S19

1962

From which,

The E. $\frac{1}{4}$ sec. cor. of sec. 24, T. 9 S., R. 19 W., bears N. $0^{\circ} 09' W.$, 94 lks. dist., hereinbefore described.

From the cor. of secs. 17, 18, 19 and 20.

N. $0^{\circ} 05' E.$, bet. secs. 17 and 18.

Over mountainous land.

Desc. 200 ft. over NW. slope through dense timber.

5.00 Draw, drains S. $80^{\circ} W.$; asc. 250 ft. over S. slope.

21.40 Spur, slopes W.; desc. 500 ft. over N. slope.

39.10 Unimproved dirt road, bears E. and W.

39.30 Wash, 30 lks. wide, 3 ft. deep in Sevy Canyon, drains W.; asc. 10 ft. over S. slope.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 17 and 18.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, $4\frac{1}{2}$ ft. base to top, with brass cap mkd.

T9S R18W

$\frac{1}{4}$
S18 | S17

1962

From which cor. No. 1, Dewey # One lode, Mineral Survey No. 6310, a squared post 6x6x24 ins., above ground and plainly scribed 1x6310, bears S. $34^{\circ} 26' E.$, 11.48 chs. dist.

Survey of a Portion of the Subdivision
of T. 9 S., R. 18 W.

CHAINS

- Asc. 55 ft. over S. slope, over rolling land through medium dense timber.
- 44.50 Small draw, drains W.; continue ascent.
- 50.30 Small spur, slopes N. 75° W.; desc. 85 ft. over N. slope.
- 55.80 Draw, drains W.; asc. 75 ft. over SW. slope.
- 63.40 Wash, 20 lks. wide, 3 ft. deep, drains SW.; continue asc.
- 64.30 Small spur, slopes W.; desc. 40 ft. over NW. slope.
- 76.20 Wash, 20 lks. wide, 2 ft. deep, drains SW.; asc. 80 ft. over SE. slope.
- 80.00 Point for the cor. of secs. 7, 8, 17 and 18.
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins. in the ground to bedrock, and in a mound of stone, $4\frac{1}{2}$ ft. base to top, with brass cap mkd.

T9S R18W

$$\begin{array}{r} \underline{S7|S8} \\ S18|S17 \end{array}$$

1962

Land, rolling.
Soil, gravelly loam.
Timber, pinon and juniper.
Undergrowth, shadscale and sagebrush.

-
- From the cor. of secs. 8, 9, 16 and 17.
- N. $89^{\circ} 49'$ W., bet. secs. 8 and 17.
- Over mountainous land.
- Asc. 280 ft. over NE. slope through dense timber.
- 35.60 Main ridge of Deep Creek Mountain, bears N. and S.; desc 145 ft. over steep, broken W. slope.
- 39.97 Point for the $\frac{1}{2}$ sec. cor. of secs. 8 and 17.
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 15 ins. in the ground to bedrock, and in a mound of stone, $3\frac{1}{2}$ ft. base to top, with brass cap mkd.

T9S R18W

$$\begin{array}{r} \underline{S8} \\ S17 \end{array}$$

1962

Desc. 890 ft. over steep, broken W. slope.

Survey of a Portion of the Subdivision
of T. 9 S., R. 18 W.

CHAINS	
44.90	Draw, drains SW.; continue descent over SW. slope.
52.10	Draw, drains SW.; continue descent.
57.70	Rocky spur, slopes SW.; continue descent over W. slope.
67.20	Draw, drains SW.; continue descent.
77.90	Draw, drains SW.; asc. 30 ft. over E. slope.
79.94	The cor. of secs. 7, 8, 17 and 18.
	<p>Land, mountainous. Soil, gravel and rocky loam. Timber, juniper and pinon. Undergrowth, sagebrush and shadscale.</p>
	West, bet. secs. 7 and 18.
	Over mountainous land.
	Asc. 185 ft. over steep, E. slope through medium dense timber.
7.80	Rocky spur, slopes SW.; desc. 260 ft. over W. slope.
17.70	Draw, drains SW.; asc. 10 ft. over E. slope.
22.50	Rocky spur, slopes SW.; desc. 190 ft. over NW. slope.
40.00	Point for the $\frac{1}{2}$ sec. cor. of secs. 7 and 18.
	<p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins. in the ground to bedrock, and in a mound of stone, $3\frac{1}{2}$ ft. base to top, with brass cap mkd.</p>
	T9S R18W
	$\frac{1}{2} \frac{S7}{S18}$
	1962
	Desc. 280 ft. over W. slope.
44.40	Small wash, 20 lks. wide, 2 ft. deep, drains SW.; continue descent.
47.60	Small spur, slopes SW.; continue descent over W. slope.
59.90	Small wash, 15 lks. wide, 3 ft. deep, drains NW.; continue descent.
77.31	Intersect the W. bdy. of the Tp.
	Point for the closing cor. of secs. 7 and 18.
	At point of intersection.

Survey of a Portion of the Subdivision
of T. 9 S., R. 18 W.

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 14 ins. in the ground to bedrock, and in a mound of stone, $3\frac{1}{2}$ ft. base to top, with brass cap mkd.

T9S
R19W R18W
S13 $\frac{S7}{S18}$ C
1962

From which,

The cor. of secs. 12 and 13, T. 9 S., R. 19 W., bears N. $0^{\circ} 08' E.$, 82 lks. dist., hereinbefore described.

Land, mountainous.
Soil, gravel and rocky loam.
Timber, pinon and juniper.
Undergrowth, sagebrush and shadscale.

Point for the W. $\frac{1}{4}$ sec. cor. of sec. 18, at midpoint bet. the closing cor. of secs. 7 and 18 and the closing cor. of secs. 18 and 19.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 12 ins. in the ground to bedrock, and in a mound of stone, $3\frac{1}{2}$ ft. base to top, with brass cap mkd.

T9S
R19W R18W
 $\frac{1}{4}$
| S18
1962

From which,

The E. $\frac{1}{4}$ sec. cor. of sec. 13, T. 9 S., R. 19 W., bears N. $0^{\circ} 08' E.$, 68 lks. dist., hereinbefore described.

From the cor. of secs. 7, 8, 17 and 18.

N. $0^{\circ} 05' E.$, bet. secs. 7 and 8.

Over mountainous land.

Asc. 495 ft. over SE. slope, through medium dense timber.

- 26.20 Spur, slopes SW.; desc. 440 ft. over steep N. slope.
34.00 Small draw, drains NE.; continue descent over NE. slope.
40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 7 and 8.

Survey of a Portion of the Subdivision
of T. 9 S., R. 18 W.

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 8 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T9S R18W

$$\frac{1}{2}$$
 S7|S8

1962

Desc. 140 ft. over NE. slope through scattered timber.

44.00 Wash, 20 lks. wide, 2 ft. deep, drains NW.; continue descent over NW. slope.

49.10 Wash, 30 lks. wide, 2 ft. deep in Christiansen Canyon, drains W.; asc. 295 ft. over SW. slope.

52.30 Draw, drains SW.; continue ascent.

67.00 Spur, slopes W.; desc. 220 ft. over NW. slope.

75.60 Draw, drains W.; asc. 130 ft. over SW. slope.

80.00 Point for the cor. of secs. 5, 6, 7 and 8.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 14 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T9S R18W

$$\frac{S6}{S7} | \frac{S5}{S8}$$

1962

Land, mountainous.
Soil, clay and gravel loam.
Timber, pinon and juniper.
Undergrowth, sagebrush and shadscale.

From the cor. of secs. 4, 5, 8 and 9.

N. $89^{\circ} 55'$ W., bet. secs. 5 and 8.

Over mountainous land.

Asc. 15 ft. over NE. slope, through widely scattered timber.

3.00 Small spur, slopes NE.; desc. 15 ft. over NW. slope.

6.10 Draw, drains NE.; asc. 55 ft. over SE. slope.

12.90 Slopes changes; asc. 125 ft. over NE. slope.

23.10 Spur, slopes NE.; desc. 20 ft. over NW. slope.

26.00 Draw, drains NE.; asc. 230 ft. over E. slope.

36.40 Point of spur, slopes E.; asc. 25 ft. over NE. slope.

Survey of a Portion of the Subdivision
of T. 9 S., R. 18 W.

CHAINS

38.60 Top of ascent; desc. 10 ft. over NW. slope.

39.95 Point for the $\frac{1}{2}$ sec. cor. of secs. 5 and 8.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins. in the ground to bedrock, and in a mound of stone, $3\frac{1}{2}$ ft. base to top, with brass cap mkd.

T9S R18W

$\frac{1}{2}$ $\frac{S5}{S8}$

1962

42.20 Small draw, drains NE.; asc. 215 ft. over NE. slope.

52.20 Main ridge of Deep Creek Mountains, bears N. and S.; desc. 680 ft. over steep, SW. slope.

74.00 Draw, drains SW.; asc. 5 ft. over SE. slope.

76.40 Top of ascent, slopes S.; desc. 40 ft. over SW. slope.

79.90 The cor. of secs. 5, 6, 7 and 8.

Land, mountainous.
Soil, gravel and rock.
Timber, pinon and juniper.
Undergrowth, sagebrush.

West, bet. secs. 6 and 7.

Over mountainous land.

Desc. 110 ft. over SW. slope, through widely scattered timber.

4.50 Draw, drains S.; asc. 20 ft. over SE. slope.

8.70 Spur, slopes S.; desc. 150 ft. over SW. slope.

17.90 Draw, drains S.; asc. 5 ft. over E. slope.

19.20 Spur, slopes S.; desc. 110 ft. over W. slope.

23.30 Draw, drains S.; asc. 25 ft. over SE. slope.

31.60 Spur, slopes S.; desc. 165 ft. over W. slope.

40.00 Point for the $\frac{1}{2}$ sec. cor. of secs. 6 and 7.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 12 ins. in the ground to bedrock, and in a mound of stone, $3\frac{1}{2}$ ft base to top, with brass cap mkd.

T9S R18W

$\frac{1}{2}$ $\frac{S6}{S7}$

1962

Desc. 25 ft. over SW. slope.

Survey of a Portion of the Subdivision
of T. 9 S., R. 18 W.

CHAINS

- 41.30 Draw, drains S.; asc. 30 ft. over SE. slope.
 44.10 Spur, slopes S.; desc. 60 ft. over SW. slope.
 48.90 Head of draw, drains S.; asc. 95 ft. over SE. slope.
 54.60 Spur, slopes N. 85° W.; desc. 100 ft. along N. slope.
 62.60 Slope changes to NW.; desc. 345 ft. over NW. slope.
 77.09 Intersect the W. bdy. of the Tp.
 Point for the closing cor. of secs. 6 and 7.
 At point of intersection.
 Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T9S
 R19W R18W
 S12 | S6 C
 | S7 C
 1962

From which,

The cor. of secs. 1 and 12, T. 9 S., R. 19 W., bears N. 0° 08' E., 84 lks. dist., hereinbefore described.

Land, mountainous.
 Soil, clay, gravel and rocky loam.
 Timber, juniper and pinon.
 Undergrowth, sagebrush and shadscale.

Point for the W. ½ sec. cor. of sec. 7, at midpoint bet. the closing cor. of secs. 7 and 18 and the closing cor. of secs. 6 and 7.

Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T9S
 R19W R18W
 ½
 | S7
 1962

From which,

The E. ½ sec. cor. of sec. 12, T. 9 S., R. 19 W., bears N. 0° 11' E., 93 lks. dist., hereinbefore described.

Survey of a Portion of the Subdivision
of T. 9 S., R. 18 W.

CHAINS

Point for the W. $\frac{1}{2}$ sec. cor. of sec. 6, 40.00 chs.
northing from the closing cor. of secs. 6 and 7.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins.
in the ground to bedrock, and in a mound of stone, $3\frac{1}{2}$
ft. base to top, with brass cap mkd.

T9S
R19W R18W
 $\frac{1}{2}$
| S6
1962

From which,

The E. $\frac{1}{4}$ sec. cor. of sec. 1, T. 9 S., R. 19 W.,
bears N. $0^{\circ} 01'$ E., 93 lks. dist., hereinbefore
described.

From the cor. of secs. 5, 6, 7 and 8.

N. $0^{\circ} 03'$ W., bet. secs. 5 and 6.

Over mountainous land.

Asc. 290 ft. over SW. slope, through widely scattered
timber.

- 16.10 Head of draw, drains SW.; asc. 150 ft. over S. slope.
- 22.80 Spur, slopes W.; desc. 75 ft. over NW. slope.
- 29.90 Head of draw, drains W.; asc. 135 ft. over SW. slope.
- 35.50 Spur, slopes W.; desc. 65 ft. over NW. slope.
- 40.00 Point for the $\frac{1}{2}$ sec. cor. of secs. 5 and 6.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins.
in the ground to bedrock, and in a mound of stone, 3 ft.
base to top, with brass cap mkd.

T9S R18W
 $\frac{1}{2}$
S6 | S5
1962

Desc. 20 ft. over NW. slope.

- 43.70 Head of draw, drains W.; asc. 5 ft. over SW. slope.
- 47.50 Spur, slopes W.; desc. 405 ft. over NW. slope.
- 63.20 Draw, drains W.; asc. 90 ft. over SW. slope.
- 71.70 Spur, slopes W.; desc. 110 ft. over NW. slope.
- 77.20 Draw, drains W.; asc. 25 ft. over SW. slope.

Survey of a Portion of the Subdivision
of T. 9 S., R. 18 W.

CHAINS

81.06

The cor. of secs. 5, 6, 31 and 32, on the N. bdy. of the Tp., monumented with an iron post, 2 ins. diam., firmly set, mkd. and witnessed as described in the official record of the 1925 survey of T. 8 S., R. 18 W.

Land, mountainous.

Soil, gravel loam.

Timber, pinon and juniper.

Undergrowth, sagebrush, and shadscale.

General Description

The general portion of Township 9 South, Range 18 West, is located in the Deep Creek Mountain range with elevation varying from 8500 feet to 6100 feet above sea level. There is an abundance of good grazing grass in the area. The major portion of the township is inaccessible by vehicular travel although some jeep trails and wood roads do exist in the lower elevations of the township. Mineral monuments or location monuments, numbers 1-2-6 and 9 are located in the township. There are two mining districts: Willow Springs and Clifton. There are no major improvements in the township except for some prospecting and mining claims. Timber in the area consists of scattered pinon and juniper in the lower elevations, and dense pine, mahogany, pinon and juniper in the higher elevations. The main ridge of Deep Creek Mountain bears irregularly north and south through the west portion of the township, with drainage to the east and west by numerous canyons and draws. No water was noted within the township.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS

NAMES	CAPACITY
Rex J. Edwards	Principal Assistant
Ferrel D. Reynolds	Principal Assistant
Douglas L. McInelly	Chainman
Max Asay	Chainman
Paul E. Mahler	Flagman
Gail E. Reynolds	Flagman
Marcus C. Gleave	Cornerman
Frank L. Heath	Cornerman
Jeffery M. Campbell	Axman

CERTIFICATE OF SURVEY

I, Craig P. Sylvester, HEREBY CERTIFY upon honor that, amended in pursuance of special instructions bearing date of the 19th day of December, 1961,

I have supervised the dependent resurvey of the West bdy. of Township 9 South, Range 17 West, and the East bdy. of Township 9 South, Range 19 West and the survey of the South bdy., the subdivisional lines of the West 1/2 of the Township and secs. 2 and 36 of T. 9 S., R. 18 W.

of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

March 13, 1963 (Date)

[Signature] (Cadastral Surveyor)

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

SUBMITTED FOR APPROVAL Date JUN 5 1969 FEB 1969

BUREAU OF LAND MANAGEMENT, Washington, D. C.

The foregoing field notes of the survey of the South bdy., the subdivisional line of the West 1/2 of the Tp., and secs. 2 and 36 of T. 9 S., R. 18 W., and the dependent resurvey of the West bdy. of T. 9 S., R. 17 W., and the dependent resurvey of the East bdy. of T. 9 S., R. 19 W.

executed by Fred R. Chappell, Glen B. Hatch, cadastral surveyors; and LaVer Griffin, survey aid, under supervision of Craig P. Sylvester, cadastral su having been critically examined and found correct, are hereby approved.

JUN 5 1969 (Date)

Thomas A. Tillman (Chief, Division of Engineering) Acting Chief, Division of Cadastral Survey

CERTIFICATE OF TRANSCRIPT

is a true copy of the original field notes.

(Date)

Blank

Page

Blank

Page

INDEX DIAGRAM

Township 10 SOUTH, Range 18 WEST

25 6 54	55 5 53	42 4 41	32 8 34	33 2 34	32 1 19	18
24 7 51	52 8 51	40 9 40	31 10 11		19	17
23 18 49	50 17 48	39 16 38	30 15 14		13	16
22 19 46	47 20 45	38 21 37	29 22 28		24	14
21 20 44	45 29 43	36 28 35	29 27 26		25 27	13
20 21 10	42 22 9	35 23 7	28 24 6		26 26 2	12

W. B. ...

Lines surveyed by Fred R. Chappell _____

Lines surveyed by Glen B. Hatch _____

Lines surveyed by LaVern Griffin _____

1
Township 10 South, Range 18 West

The South boundary (Second Standard Parallel South) was surveyed by Joseph Gorlinski in 1875. In 1915, John W. Dougall resurveyed this boundary. The East and West boundaries were surveyed by Joseph Gorlinski in 1875. The North boundary was surveyed by LaVern Griffin concurrently with this survey, and is described in the field notes of the S. bdy., of T. 9 S., R. 18 W.

The following field notes are those of the dependent resurvey of the West Boundary of Township 10 South, Range 17 West, East Boundary of Township 10 South, Range 19 West and the South Boundary (Second Standard Parallel South), and the survey of a portion of the subdivisional lines of Township 10 South, Range 18 West deemed sufficient in extent to facilitate development of the natural resources and mark the boundaries of those sections that normally are considered state school sections.

Before restoring the corners, the lines of the original survey were retraced, and diligent search made for any evidence of the original corners, bearing trees, and other calls of the original field note record.

The rules of proportionate measurement were applied to ascertain the position of the lost corners, but not until exhausting every reasonable possibility of finding direct evidence for the control of each particular corner.

The survey was executed with W. & L.E. Gurley Solar Transits Nos. 580518, 580538 and 570614, constructed in accordance with the standard instrumental specifications of the Bureau of Land Management. The instruments were in good adjustment prior to the beginning of the survey and were maintained in proper adjustment throughout the progress of the survey.

Lines connecting previously established corners were run by random and true method, but for simplification of the record the random lines are omitted from the field notes. In accordance with the intent of the special instructions, all subdivisional corners established are calculated to be at the position they would occupy if the entire township were subdivided.

Measurements herein contained were made with a narrow steel tape, 8 chains in length, graduated every link for the first 100 links and thereafter at intervals of 10 links. The tape was tested by comparison with a one chain standard steel tape and found to be correct. Measurements were made on the slope with the vertical angle of each interval ascertained by a clinometer in good adjustment; horizontal equivalents alone are entered in the field notes. All lines of this survey were run by direct method where the lines were accessible; lines inaccessible were run by traverse or triangulation methods. Distances to topography on lines run by traverse or triangulation are approximate. The details of such traverses or triangulations have been thoroughly checked and verified, and in order to simplify the record the diagrams and reductions are omitted from these field notes.

The direction of the lines of this survey were determined by reference to true meridians established on line by altitude observations on the sun. The lines were carried forward by sustained angulation being supplemented by other numerous altitude observations on the sun taken throughout the progress of the survey.

Township 10 South, Range 18 West

The geographic position for the southeast corner of the township is at latitude $39^{\circ} 54' 20.9''$ N. and longitude $113^{\circ} 48' 49.1''$ W., as adjusted from section line ties to U. S. C. & G. S. triangulation station "North Peak Tree East Prong" at latitude $40^{\circ} 02' 48.276''$ N. and longitude $113^{\circ} 53' 38.605''$ W., located N. $53^{\circ} 23' W.$, 27.89 chs. dist. from the $\frac{1}{2}$ sec. cor. of secs. 16 and 17, T. 9 S., R. 18 W.

The magnetic declination was read at a number of stations throughout the township and the average of these readings was found to be 17° East.

Dependent Resurvey of the South Boundary, (Second Standard Parallel South), Township 10 South, Range 18 West.

Establishment of new standard $\frac{1}{2}$ sec. and sec. cors. at regular intervals of 40.00 and 80.00 chains westing, counting from the standard cor. of T. 10 S., Rs. 17 and 18 W., using old cors. found for the control in alignment only, and establishment of N. $\frac{1}{2}$ sec. cors. pertaining to T. 11 S., R. 18 W., on this line.

The standard cor. of T. 10 S., Rs. 17 and 18 W., monumented with a granite stone, 8x10x12 ins., firmly set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins. in the ground to bedrock, and in a mound of stone 4 ft. base to top, with brass cap mkd.

T10S	
SC	
R18W	R17W
S36	S31
T11S	
1962	

Bury original stone cor. alongside iron post.

From this cor. the closing cor. of Tp. 11 S., Rs. 17 and 18 W., bears East, 7.51 chs. dist., monumented with a 3 in. iron post, set, mkd. and witnessed as described in the official record of the survey of T. 11 S., R. 18 W.

N. $89^{\circ} 54' W.$, along the South bdy. of sec. 36.

Over mountainous land through scattered timber.

Asc. 55 ft. along S. slope.

9.20 Top of ascent, slopes S., desc. 35 ft. over SW. slope.

24.30 Draw, drains SE. from W., desc. 395 ft. over SE. slope. Enter dense timber.

28.66 Point for the N. $\frac{1}{2}$ sec. cor. of sec. 1, T. 11 S., R. 18 W., at proportionate dist. bet. the closing cor. of T. 11 S., Rs. 17 and 18 W., and the closing cor. of secs. 1 and 2, T. 11 S., R. 18 W.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 3 $\frac{1}{2}$ ft. base to top, with brass cap mkd.

Dependent Resurvey of the South Boundary, (Second
Standard Parallel South, T. 10 S., R. 18 W.

CHAINS

½ S1
T11S R18W
1962

Asc. 320 ft. over rocky E. slope.

38.50 Top of ledge, 20 ft. high, bears N. and S.; asc. 40 ft. over E. slope.

39.81 The standard ¼ sec. cor. of sec 36, monumented with a 1 in. iron post, set, mkd. and witnessed as described in the official record of the 1915 resurvey. This cor. will now function as an angle point only, and was remarked to read

A P
T10S R18W
S36
62
1915

N. 89° 50' W., beginning new measurement.

0.19 40.00 chs. westing from the standard cor. of Tp. 10 S., Rs. 17 and 18 W. Point for the standard ¼ sec. cor. of sec. 36.

Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground to bedrock and in a mound of stone, 4 ft. base to top, with brass cap mkd.

S C
T10S R18W
½ S36
1962

Asc. 705 ft. over steep E. slope.

28.70 The closing cor. of secs. 1 and 2, T. 11 S., R. 18 W., monumented with a 2 in. iron post, set, mkd. and witnessed as described in the official record of the survey of T. 11 S., R. 18 W.

Asc. 370 ft. over steep E. slope.

39.74 The standard cor. of secs. 35 and 36, monumented with a 3 in. iron post, set, mkd. and witnessed as described in the official record of the 1915 resurvey. This cor. will now function as an angle point only, and was remarked to read

A P
R10S R18W
S36
62
1915

N. 89° 51' W., beginning new measurement.

0.45 80.00 chs. westing from the standard cor. of T. 10 S., Rs. 17 and 18 W. Point for the standard cor. of secs. 35 and 36.

Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

Dependent Resurvey of the South Boundary, (Second
Standard Parallel South T. 10 S. R. 18 W.

CHAINS

S C
T10S R18W
S35|S36
1962

Land, mountainous.
Soil, rocky loam.
Timber, dense pinon and juniper.

Thence along the S. bdy. of sec. 35, with continuous measurement.

Over broken, mountainous land through dense timber.

Asc. 45 ft. over E. slope.

- 3.75 Spur slopes SE., thence by triangulation; asc. about 85 ft. along very broken, precipitous S. slope. Leave timber.
- 7.75 Point of ledgy spur slopes S.; desc. abruptly about 150 ft. over broken, precipitous SW. slope.
- 12.50 Ledgy draw drains S.; asc. abruptly about 500 ft. over broken, precipitous SE. slope.
- 21.75 Top of ledge, about 100 ft. high, bears NE. and SW.
- 23.25 Top of ledge, about 150 ft. high, bears NE. and SW.
- 24.50 Point of narrow ledge, shelf, about 100 ft. high, on S. side of quartzite butte, bears NE. and NW. End triangulation.
- 24.74 Point selected for the witness N. $\frac{1}{4}$ sec. cor. of sec. 2, T. 11 S., R. 18 W.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., over (X) on solid rock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

W
←
C

$\frac{1}{4}$ S2
T11S R18W
1962

Thence by triangulation; desc. abruptly about 200 ft. over broken ledgy SW. slope.

- 28.95 True point for the N. $\frac{1}{4}$ sec. cor. of sec. 2, T. 11 S., R. 18 W., at mid point bet. closing cors. falls on precipitous SW. slope and is not monumented.
- 33.75 Ledgy draw drains S.; asc. about 100 ft. over quartzite ledges on SE. slope.
- 38.55 Ledgy spur slopes S. End triangulation. Desc. abruptly 25 ft. over W. slope.
- 39.82 The standard $\frac{1}{4}$ sec. cor. of sec. 35, monumented with a 1 i. iron post, set, mkd. and witnessed as described in the official record. This cor. will now function as the witness standard $\frac{1}{4}$ sec. cor. of sec. 35, and was remarked to read

S C
T10S R18W
W ← $\frac{1}{4}$ S35
C 62
1915

Dependent Resurvey of the South Boundary, (Second Standard Parallel South), T. 10 S., R. 18 W.

CHAINS

from which the original bear trees:

A pinon, 16 ins. diam., bears N. 54° 30' E., 100 lks. dist., and was remarked, SC ¼ S35 WC BT.

A pinon, 12 ins. diam., bears N. 15° W., 77 lks. dist., and was remarked, SC ¼ S35 WC BT.

N. 89° 42' W., beginning new measurement.

0.63 40.00 chs. westing from the standard cor. of secs. 35 and 36. True point for the standard ¼ sec. cor. of sec. 35, falls on precipitous W. slope and is not monumented.

By triangulation; desc. abruptly about 300 ft. over precipitous W. slope.

12.90 Rocky draw drains S.; asc. about 350 ft. over precipitous SE. slope.

20.60 West rim of ledgy draw, ledge 15 ft. high, bears N. and S. Asc. about 20 ft. over SE. slope. Enter dense timber.

25.90 Spur slopes S.; desc. 40 ft. over SW. slope. End triangulation.

29.11 The closing cor. of secs. 2 and 3, T. 11 S., R. 18 W., monumented with a 2 in. iron post, set, mkd. and witnessed as described in the official record.

Desc. 215 ft. over SW. slope.

39.79 The standard cor. of secs. 34 and 35, monumented with a 3 in. iron post, set, mkd. and witnessed as described in the official record of 1915 resurvey. This cor. will now function as an angle point only, and was remarked to read

A P
T10S R18W
S35
62
1915

N. 89° 46' W., beginning new measurement.

Over mountainous land through dense timber.

Desc. 10 ft. over SW. slope.

0.84 80.00 chs. westing from the standard cor. of secs. 35 and 36. Point for the standard cor. of secs. 34 and 35.

Set an iron post, 30 ins. long, 2½ ins. diam., on solid rock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

S C
T10S R18W
S34 | S35
1962

Land, mountainous, broken.
Soil, rocky loam with considerable exposed quartzite ledges.
Timber, scattered pinon and juniper E. portion; dense pinon, juniper and mahogany W. portion

Dependent Resurvey of the South Boundary, (Second
Standard Parallel South), T. 10 S., R. 18 W.

CHAINS	
	Thence along the S. bdy. of sec. 34, with continuous measurement. Desc. 10 ft. over SW. slope.
4.65	Draw drains S.; asc. 210 ft. over steep SE. slope.
12.05	Spur slopes SE.; desc. 30 ft. along S. slope. Enter dense mahogany.
18.55	Bottom of descent slopes S.; asc. 45 ft. along S. slope.
26.05	Head of draw drains SE.; asc. 130 ft. over steep NE. slope.
29.22	Point for the N. $\frac{1}{4}$ sec. cor. of sec. 3, T. 11 S., R. 18 W., mid point bet. closing cors. Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 8 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.
	<hr style="width: 50px; margin: auto;"/> $\frac{1}{4}$ S3 T11S R18W 1962
	Asc. 170 ft. over steep NE. slope.
33.65	Rocky spur slopes SE.; desc. 80 ft. over rocky SW. slope.
39.63	The standard $\frac{1}{4}$ sec. cor. of sec. 34, monumented with a 1 in. iron post, set, mkd. and witnessed as described in the official record of the 1915 resurvey. This cor. will now function as an angle point only, and was remarked to read <div style="text-align: center;"> <hr style="width: 50px; margin: auto;"/> A P T10S R18W <hr style="width: 50px; margin: auto;"/>S34 62 1915 </div>
	<hr style="width: 100px; margin: auto;"/>
	N. $89^{\circ} 44'$ W., beginning new measurement. Desc. 15 ft. over rocky SW. slope.
1.21	40.00 chs. westing from the standard cor. of secs. 34 and 35. Point for the standard $\frac{1}{4}$ sec. cor. of sec. 34. Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 8 ins. in the ground to bedrock, and in a mound of stone, $3\frac{1}{2}$ ft. base to top, with brass cap mkd.
	<div style="text-align: center;"> <hr style="width: 50px; margin: auto;"/> S C T10S R18W $\frac{1}{4}$ S34 <hr style="width: 50px; margin: auto;"/>1962 </div>
	Thence by triangulation; desc. about 30 ft. over SW. slope.
7.00	Draw drains SE.; asc. about 150 ft. over NE. slope.
10.00	Trail road, bears NW. and SE.
15.60	Spur slopes S: End one triangulation and beginning of another. Desc. about 200 ft. over SW. slope.

Dependent Resurvey of the South Boundary, (Second
Standard Parallel South), T. 10 S., R. 18 W.

<p>CHAINS 29.49</p>	<p>The closing cor. of secs. 3 and 4, T. 11 S., R. 18 W., monumented with a 2 in. iron post, set, mkd. and witnessed as described in the official record of the 1915 survey.</p> <p>Continue by triangulation.</p>
<p>37.50</p>	<p>Draw drains SE.; asc. about 100 ft. over steep NE. slope.</p>
<p>39.81</p>	<p>The standard cor. of secs. 33 and 34, monumented with a 3 in. iron post, set, mkd. and witnessed as described in the official record of the 1915 resurvey. This cor. will now function as an angle point only, and was remarked to read</p> <p style="text-align: center;">A P T10S R18W <u>S34</u> 62 1915</p> <hr style="width: 20%; margin: auto;"/>
	<p>N. 89° 55' W., beginning new measurement.</p> <p>Over mountainous land through dense mahogany timber.</p> <p>Asc. 160 ft. over steep E. slope.</p>
<p>1.40</p>	<p>80.00 chs. westing from the standard cor. of secs. 34 and 35. Point for the standard cor. of secs. 33 and 34.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone to top, with brass cap mkd.</p> <p style="text-align: center;">S C T10S R18W <u>S33 S34</u> 1962</p> <p>Land, mountainous. Soil, rocky loam. Timber, dense mahogany, pinon and juniper. Undergrowth, patches of bunch grass.</p>
	<p>Thence along the S. bdy. of sec. 33, with continuous measurement.</p> <p>Asc. 200 ft. over steep E. slope.</p>
<p>8.60</p>	<p>Spur slopes S.; desc. 480 ft. over steep SW. slope.</p>
<p>27.70</p>	<p>Leave dense mahogany timber, bears N. and SE., enter sagebrush.</p>
<p>29.58</p>	<p>Point for the N. ¼ sec. cor. of sec. 4, T. 11 S., R. 18 W., mid point bet. closing cors.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground to bedrock and in a mound of stone, 3 ft. base to top, with brass cap mkd.</p> <p style="text-align: center;">¼ S4 T11S R18W 1962</p>
<p>-31.80</p>	<p>Fork of Basin Creek, with stream of clear water, 2 lks. wide, 3 ins. deep, flow SE.; asc. 145 ft. over steep E. slope.</p>

Dependent Resurvey of the South Boundary, (Second
Standard Parallel South), T. 10 S., R. 11 W.

CHAINS
39.66

The standard $\frac{1}{2}$ sec. cor. of sec. 33, monumented with a 1 in. iron post, set, mkd. and witnessed as described in the official record of the 1915 resurvey. This cor. will now function as an angle point only, and was remarked to read

A P
T10S R18W
S33
62
1915

N. 89° 44' W., beginning new measurement.

Asc. 55 ft. over E. slope.

1.74 40.00 chs. westing from the standard cor. of secs. 33 and 34. Point for the standard $\frac{1}{2}$ sec. cor. of sec. 33.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 15 ins. in the ground to bedrock and in a mound of stone, 3 ft. base to top, with brass cap mkd.

S C
T10S R18W
 $\frac{1}{2}$ S33
1962

Asc. 790 ft. over steep, rocky SE. slope through scattered mahogany and patches of dense aspen timber.

29.82 The closing cor. of secs. 4 and 5, T. 11 S., R. 18 W., monumented with a 2 in. iron post, set, mkd. and witnessed as described in the official record of the 1915 survey of T. 11 S., R. 18 W.

Asc. 340 ft. over steep, rocky SE. slope.

39.95 The standard cor. of secs. 32 and 33, monumented with a 3 in. iron post, set, mkd. and witnessed as described in the official record of the 1915 resurvey. This cor. will now function as an angle point only, and was remarked to read

A P
T10S R18W
S33
62
1915

N. 89° 46' W., beginning new measurement.

Over mountainous land through scattered aspen timber.

Asc. 40 ft. over SE. slope.

1.79 80.00 chs. westing from the standard cor. of secs. 33 and 34. Point for the standard cor. of secs. 32 and 33.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., on solid stone, and in a mound of stone, 5 ft. base to top, with brass cap mkd.

S C
T10S R18W
S32|S33
1962

Dependent Resurvey of the South Boundary, (Second Standard Parallel South), T. 10 S., R. 18 W.

CHAINS	<p>Land, mountainous, broken. Soil, rocky loam with considerable exposed quartzite ledges. Timber, scattered pinon and juniper E. portion; dense pinon, juniper and mahogany W. portion.</p>
	<p>Thence along the S. bdy. of sec. 32, with continuous measurement. Asc. 210 ft. over SE. slope.</p>
2.50	Enter dense aspen timber, bears NE. and SW.
9.75	Top of ledgy knob, 50 ft. high, on spur sloping S.; asc. 250 ft. along broken, ledgy S. slope. Leave timber.
23.05	Top of ledgy finger spur, about 100 ft. high, slopes S., desc. abruptly over ledge.
23.60	Base of ledge, desc. 75 ft. along S. slope. Enter medium dense aspen timber, bears irregularly N. And SW.
29.76	<p>Point for the N. $\frac{1}{4}$ sec. cor. of sec. 5, T. 11 S., R. 18 W., mid point bet. closing cors.</p> <p>Set an iron post, 30 ins. long, 2$\frac{1}{2}$ ins. diam., 6 ins. in rock slide, and in a mound of stone, 5 ft. base to top, with brass cap mkd.</p> <div style="text-align: center;"> <hr style="width: 10%; margin: 0 auto;"/> $\frac{1}{4}$ S5 T11S R18W 1962 </div> <p>Desc. 75 ft. along S. slope.</p>
34.20	Bottom of descent; asc. 15 ft. along S. slope.
39.71	<p>The standard $\frac{1}{4}$ sec. cor. of sec. 32, monumented with a 1 in. iron post, set, mkd. and witnessed as described in the official record of the 1915 survey. This cor. will now function as an angle point only, and was remarked to read</p> <div style="text-align: center;"> A P T10S R18W <hr style="width: 10%; margin: 0 auto;"/> S32 62 1915 </div> <p>_____</p> <p>N. 89° 50' W., beginning new measurement.</p> <p>Asc. 5 ft. along S. slope.</p>
2.08	<p>40.00 chs. westing from the standard cor. of secs. 32 and 33. Point for the standard $\frac{1}{4}$ sec. cor. of sec. 32.</p> <p>Set an iron post, 30 ins. long, 2$\frac{1}{2}$ ins. diam., 12 ins. in the ground to bedrock and in a mound of stone, 4 ft. base to top, with brass cap mkd.</p> <div style="text-align: center;"> S C T10S R18W <hr style="width: 10%; margin: 0 auto;"/> $\frac{1}{4}$ S32 1962 </div> <p>Asc. 80 ft. along S. slope.</p>
14.20	Spur slopes S., desc. 50 ft. along general S. slope.

Dependent Resurvey of the South Boundary, (Second
Standard Parallel South), T. 10 S., R. 18 W.

CHAINS

- 26.20 Main divide of Deep Creek Mountain, bears irregularly N. and S.; desc. 55 ft. over SW. slope.
- 29.94 The closing cor. of secs. 5 and 6, T. 11 S., R. 18 W., monumented with a 2 in. iron post, set, mkd. and witnessed as described in the official record of the 1915 survey of T. 11 S., R. 18 W.
- Desc. 210 ft. over steep, rocky SW. slope.
- 36.30 Leave timber, bears irregularly N. and S., enter dense sagebrush. Desc. 105 ft. over rocky SW. slope.
- 39.91 The standard cor. of secs. 31 and 32, monumented with a 3 in. iron post, set, mkd. and witnessed as described in the official record of the 1915 resurvey. This cor. will now function as an angle point only and was remarked to read

A P
T10S R18W
S32
62
1915

N. 89° 49' W., beginning new measurement.

Over mountainous land through dense sagebrush.

Desc. 65 ft. over steep, rocky SW. slope.

- 2.17 80.00 chs. westing from the standard cor. of secs. 32 and 33. Point for the standard cor. of secs. 31 and 32.
- Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

S C
T10S R18W
S31|S32
1962

Land, mountainous, broken.

Soil, rocky.

Timber, medium dense aspen, with scattered pine and spruce E. portion; no timber W. portion.

Undergrowth, grass with dense sagebrush W. portion.

Thence along the S. bdy. of sec. 31, with continuous measurement.

Desc. 820 ft. over steep SW. slope.

- 25.50 Draw, drains SW.; asc. 55 ft. over ledgy SE. slope.
- 30.15 Ledgy spur slopes S.
- 30.30 Point for the N. ¼ sec. cor. of sec. 6, T. 11 S., R. 18 W., at proportionate dist. bet. the closing cor. of secs. 5 and 6, and the closing cor. of T. 11 S., Rs. 18 and 19 W.

Dependent Resurvey of the South Boundary, (Second
Standard Parallel South), T. 10 S., R. 18 W.

CHAINS	Set an iron post, 30 ins. long, 2½ ins. diam., 15 ins. in the ground to bedrock and in a mound of stone, 3½ ft. base to top, with brass cap mkd.
	<hr style="width: 10%; margin: auto;"/> ¼ S6 T11S R18W 1962
	Desc. 50 ft. over ledgy SW. slope.
31.20	Ledgy draw, drains S., asc. 25 ft. over ledgy E. slope.
34.95	Rocky spur slopes S., desc. 280 ft. over steep, rocky W. slope. Enter medium dense mahogany, bears N. and S.
38.00	Leave mahogany, bears N. and S., enter dense sagebrush and oak brush.
40.56	The standard ¼ sec. cor. of sec. 31, monumented with a 1 in. iron post, set, mkd. and witnessed as described in the official record of the 1915 resurvey. This cor. will now function as an angle point only, and was remarked to read
	AP T10S R18W S31 <hr style="width: 10%; margin: auto;"/> 62 1915
	N. 89° 46' W., beginning new measurement.
	Desc. 70 ft. over steep NW. slope.
1.61	40.00 chs. westing from the standard cor. of secs. 31 and 32. Point for the standard ¼ sec. cor. of sec. 31.
	Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground to bedrock, and in a mound of stone, 4½ ft. base to top, with brass cap mkd.
	SC T10S R18W ¼ S31 <hr style="width: 10%; margin: auto;"/> 1962
	Desc. 350 ft. over NW. slope through dense oak brush, elderberry bushes and scattered willows.
12.40	Draw, drains SW., desc. 195 ft. over SW. slope.
16.20	Leave oak brush, elderberry bushes and willows, bears NE. and SW., enter dense sagebrush.
23.50	Draw, drains S., asc. 65 ft. over E. slope.
29.31	Cor. of fences from S. and W., and at record dist. from the standard cor. of T. 10 S., Rs. 18 and 19 W. It is accepted as a perpetuation of the closing cor. of T. 11 S., Rs. 18 and 19 W. There is no remaining evidence of the original cor.
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

Dependent Resurvey of the South Boundary, (Second
Standard Parallel South), T. 10 S., R. 18 W.

CHAINS

S31	
S1	S6
C	C
R19W	R18W
T11S	
1962	

hence along fence line.

30.80 pur slopes SW., desc. 135 ft. over NW. slope.

39.81 e standard cor. of T. 10 S., Rs. 18 and 19 W., monumente
ith a granite stone, 8x8x24 ins., firmly set, mkd. and
itnessed as described in the official record.

t the cor. point

et an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in
he ground to bedrock, and in a mound of stone, 3 ft. base
o top, with brass cap mkd.

SC	
T10S	
R19W	R18W
S36	S31
1962	

nd, mountainous.

oil, rocky loam.

imber, scattered patches of aspen.

ndergrowth, dense sagebrush, oak brush, elderberry bushes
llows and june grass.

Dependent Resurvey of the West Boundary, T. 10 S., R. 1 W.

Reestablishment of the Survey Executed by Joseph Gorlinsk
in 1875.

rom the standard cor. of T. 10 S., Rs. 17 and 18 W., here
nbefore described.

. 0° 03' E., bet. secs. 31 and 36.

er rolling desert land through dense sagebrush.

sc. 15 ft. over S. slope.

3.19 Unimproved road, on top of spur, bears irregularly E.
and W., desc. 50 ft. over N. slope.

6.90 Wash, 20 lks. wide, 4 ft. deep, with stream of water, 3
lks. wide, 3 ins. deep, flows E., desc. 50 ft. over rol-
ling NE. slope.

20.35 Unimproved road, bears NE. and SW.

30.00 Wash, 50 lks. wide, 10 ft. deep, drains E., asc. 30 ft.
ver rolling SE. slope.

38.80 Spur slopes E., desc. 10 ft. over N. slope.

40.13 Point for the ¼ sec. cor. of secs. 31 and 36 at proportio
te dist.; there is no remaining evidence of the original
or.

Dependent Resurvey of the West Boundary, T. 10 S., R. 17 W.

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground to bedrock, and in a mound of stone, 3½ ft. base to top, with brass cap mkd.

T10S
R18W R17W
½
S36|S31
1962

Asc. 110 ft. along rolling E. slope.

- 50.80 Spur slopes E., desc. 75 ft. over NE. slope.
- 64.00 Canyon, drains S. 60° E., asc. 160 ft. over S. slope.
- 71.10 Spur slopes E., desc. 110 ft. over N. slope.
- 78.20 Canyon, drains S. 70° E., asc. 60 ft. over S. slope.
- 80.26 Point for the cor. of secs. 25, 30, 31 and 36 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T10S
R18W R17W
S25|S30
S36|S31
1962

Land, rolling desert.
Soil, rocky clay loam.
No timber.
Undergrowth, shadscale and sagebrush.

N. 0° 03' E., bet. secs. 25 and 30.

Over rolling desert land through sagebrush and shadscale.

Asc. 80 ft. over S. slope.

- 4.00 Spur slopes E., enter scattered pinon and juniper timber. Thence by triangulation, asc. about 500 ft. over broken SE. slope.
- 40.13 Point for the ¼ sec. cor. of secs. 25 and 30 at proportionate dist. falls on broken ledges and cannot be perpetuated.

From this point, ¼ sec. and sec. cors. pertaining to T. 10 S., R. 18 W., are established at regular intervals of 40.00 and 80.00 chs. northing, with original cors. referring to T. 10 S., R. 17 W., only.
- 47.50 Top of ledge, 60 ft. high, bears NE. and SW. End triangulation.
- 47.64 Point selected for the witness ¼ sec. cor. of secs. 25 and 30.

Set an iron post, 30 ins. long, 2½ ins. diam., over a (X) on solid stone and in a mound of stone, 4 ft. base to top, with brass cap mkd.

CHAINS

Survey of the ... T. 10 S., R. 17 W.

T10S
R18W R17W
 $\frac{1}{2}$
S25 | S30
 ↓
 W C
 1962

Enter dense pinon and juniper timber.

49.35 Spur slopes E., desc. 500 ft. over steep NE. slope.

80.13 40.00 chs. northing from the $\frac{1}{2}$ sec. cor. of secs. 25 and 30. Point for the cor. of secs. 24 and 25, T. 10 S., R. 18 W.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 8 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T10S
R18W R17W
S24 | S30
S25 ————
 1962

80.26 Point for the cor. of secs. 19, 24, 25 and 30 at proportionate dist.; there is no remaining evidence of the original cor. This cor. will now function as the cor. of secs. 19 and 30, T. 10 S., R. 17 W., only.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, $3\frac{1}{2}$ ft. base to top, with brass cap mkd.

T10S
R18W R17W
S24 | S19
 ——— S30
 1962

Land, mountainous, broken.
Soil, rocky loam, exposed granite and sandstone ledges.
Timber, dense pinon and juniper N. portion; scattered juniper and pinon S. portion.
Undergrowth, sagebrush and shadscale.

N. $0^{\circ} 03'$ E., along the W. bdy. of sec. 19.

Over mountainous land through dense timber.

Desc. 145 ft. over NE. slope.

3.45 Draw drains E., asc. 40 ft. over S. slope. Enter scattered timber.

12.35 Unimproved road, on spur, bears E. and W., desc. 70 ft. over NE. slope.

16.60 Draw drains NE., asc. 55 ft. over SE. slope.


20.80 Unimproved road, on spur, bears irregularly E. and W., desc. 100 ft. over NE. slope.

39.14 Point selected for the witness E. $\frac{1}{2}$ sec. cor. of sec. 24, T. 10 S., R. 18 W.

Dependent Resurvey of the West Boundary, T. 10 S., R. 17 W.

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.




39.87 40.00 chs. northing from the cor. of secs. 24 and 25, T. 10 S., R. 18 W. True point for the E. ¼ sec. cor. of sec. 24, falls on steep S. bank of wash, 30 lks. wide, 4 ft. deep, drains E., and is deemed unsafe to perpetuate.

40.13 True point for the ¼ sec. cor. of secs. 19 and 24 at proportionate dist. falls in wash, drains E. There is no remaining evidence of the original cor. This cor. will function as the W. ¼ sec. cor. of sec. 19 T. 10 S., R. 17 W. only. Point deemed unsafe to perpetuate.

40.27 Point selected for the witness W. ¼ sec. cor. of sec. 19.

Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.



Asc. 135 ft. over gently rolling SE. slope.

44.80 Unimproved road, bears E. and W.

48.45 Irrigation ditch, 15 lks. wide, 4 ft. deep, with stream of water, flows NE.


52.35 Spur slopes E., desc. 250 ft. over gently rolling N. slope.

70.30 Small draw drains NE.

79.35 Man made rock ditch, drains NE.

79.87 80.00 chs. northing from the cor. of secs. 24 and 25; point for the cor. of secs. 13 and 24, T. 10 S., R. 18 W.

Set an iron post, 30 ins. long, 2½ ins. diam., 3 ins. in the ground to bedrock, and in a mound of stone, 3½ ft. base to top, with brass cap mkd.



80.26 Point for the cor. of secs. 13, 18, 19 and 24 at proportionate dist.; there is no remaining evidence of the original cor. This cor. will now function as the cor. of secs. 18 and 19, T. 10 S., R. 17 W. only.

Dependent Resurvey of the West Boundary, T. 10 S., R. 17 W.

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 4 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T10S
R18W R17W
S13 | S18
 | S19
 | 1962

Land, rolling desert.
Soil, rocky clay loam.
Timber, scattered pinon and juniper.
Undergrowth, shadscale and sagebrush.

N. $0^{\circ} 03'$ E., along the W. bdy. of sec. 18.

Over gently rolling desert land, through scattered timber and dense shadscale and sagebrush.

Asc. 40 ft. over gentle SE. slope.

- 0.90 Small draw drains E.
15.20 Stream of water, 2 lks. wide, 6 ins. deep, flows E.
17.90 Unimproved road, bears E. and W.
24.50 Small spur slopes NE., desc. 60 ft. over gentle NW. slope.
39.61 40.00 chs. northing from the cor. of secs. 13 and 24.
Point for the E. $\frac{1}{4}$ sec. cor. of sec. 13, T. 10 S., R. 18 W.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 12 ins. in the ground to bedrock and in a mound of stone, $3\frac{1}{2}$ ft. base to top, with brass cap mkd.

T10S
R18W R17W
 | $\frac{1}{4}$
S13 |
 | 1962

- 40.13 Point for the $\frac{1}{4}$ sec. cor. of secs. 13 and 18 at proportionate dist.; there is no remaining evidence of the original cor. This cor. will now function as the W. $\frac{1}{4}$ sec. cor. of sec. 18, T. 10 S., R. 17 W. only.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 lks. in the ground to bedrock and in a mound of stone, $3\frac{1}{2}$ ft. base to top with brass cap mkd.

T10S
R18W R17W
 | $\frac{1}{4}$
 | S18
 | 1962

Desc. 210 ft. over gentle NE. slope.

- 79.61 80.00 chs. northing from the cor. of secs. 13 and 24.
Point for the cor. of secs. 12 and 13, T. 10 S., R. 18 W.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 8 ins. in the ground to bedrock and in a mound of stone, $3\frac{1}{2}$ ft. base to top with brass cap mkd.

Dependent Resurvey of the West Boundary, T. 10 S., R. 17 W.

CHAINS

T10S
R18W R17W
S12 | S18
S13 |
1962

80.26 The cor. of secs. 7, 12, 13 and 18, monumented with a sandstone, 7x15x16 ins., firmly set, mkd. and witnessed as described in the official record. This cor. will now function as the cor. of secs. 7 and 18, T. 10 S., R. 17 W. only.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground to bedrock and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T10S
R18W R17W
S12 | S7
S18 |
1962

bury original stone cor. alongside the iron post.

Land, rolling desert.
Soil, rocky clay loam.
Timber, widely scattered pinon and juniper.
Undergrowth, shadscale and sagebrush.

N. 0° 06' E., along the W. bdy. of sec. 7

Over gently rolling desert land, through medium shadscale and sagebrush.

- 4.90 Small draw, drains SE.
- 10.60 Small draw, drains NE.
- 18.65 Small draw, drains NE.
- 37.20 Wash, 15 lks. wide, 6 ft. deep, drains E.
- 39.35 40.00 chs. northing from the cor. of secs. 12 and 13. Point for the E. ¼ sec. cor. of sec. 12, T. 10 S., R. 18 W.

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T10S
R18W R17W
¼
S12 |
1962


40.09 The ¼ sec. cor. of secs. 7 and 12, monumented with a granite stone, 10x12x15 ins., firmly set, mkd. and witnessed as described in the official record. This cor. will now function as the W. ¼ sec. cor. of sec. 7, T. 10 S., R. 17 W. only.

At the cor. point

Dependent Resurvey of the West Boundary, T. 10 S., R. 17 W.

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 2 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.




bury original stone cor. alongside the iron post.

N. 0° 06' E., beginning new measurement.

Continue over gently rolling desert land.


- 4.70 Small draw, drains E.
 - 11.60 Small draw, drains E.
 - 29.20 Unimproved road, bears E. and W.
 - 39.26 80.00 chs. northing from the cor. of secs. 12 and 13.
Point for the cor. of secs. 1 and 12, T. 10 S., R. 18 W.
- Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.



- 40.11 The cor. of secs. 1, 6, 7 and 12, monumented with a flint stone, 6x10x17 ins., firmly set, mkd. and witnessed as described in the official record. This cor. will now function as the cor. of secs. 6 and 7, T. 10 S., R. 17 W. only.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground to bedrock and in a collar of stone to top, with brass cap mkd.



bury original stone cor. alongside the iron post.

Land, gently rolling desert.

Soil, rocky loam.

No timber.

Undergrowth, sagebrush and shadscale.

N. 0° 10' E., along the W. bdy. of sec. 6.

Over gently rolling desert land through sagebrush, greasewood and shadscale.

Dependent Resurvey of the West Boundary, T. 10 S., R. 17 W.

CHAINS	
1.90	Small draw drains E.
7.90	Small draw drains E.
12.50	Draw drains E.
19.30	Old trail, bears E. and W.
25.80	Draw drains E.
35.60	Draw drains E.
39.15	40.00 chs. northing from the cor. of secs. 1 and 12.
	Point for the E. $\frac{1}{4}$ sec. cor. of sec. 1, T. 10 S., R. 18 W.
	Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 6 ins. in the ground to bedrock and in a mound of stone, 3 $\frac{1}{2}$ ft. base to top, with brass cap mkd.
	T10S R18W R17W $\frac{1}{4}$ S1 1962
40.20	The $\frac{1}{4}$ sec. cor. of secs. 1 and 6, monumented with a flint stone, 12x12x24 ins., firmly set, mkd. and witnessed as described in the official record. This cor. will now function as the W. $\frac{1}{4}$ sec. cor. of sec. 6, T. 10 S., R. 17 W., only.
	At the cor. point
	Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 16 ins. in the ground to bedrock and in a mound of stone, 3 ft. base to top, with brass cap mkd.
	T10S R18W R17W $\frac{1}{4}$ S6 1962
	bury original stone cor. alongside the iron post.
	N. 0° 10' E., beginning new measurement.
	Continue over gently rolling desert land.
5.50	Draw, drains E.
20.50	Draw, drains E.
31.00	Draw, drains E.
34.10	Unimproved road, bears E. and W.
40.06	The cor. of T. 9 and 10 S., Rs. 17 and 18 W., monumented with a white flint stone, 6x10x25 ins., firmly set, mkd. and witnessed as described in the official record.
	At the cor. point
	Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 18 ins. in the ground to bedrock and in a mound of stone, 4 $\frac{1}{2}$ ft. base to top, with brass cap mkd.

CHAINS

T9S
 R18W R17W
 S36 | S31
 S1 | S6
 T10S
 1962

Land, gently rolling desert.
 Soil, rocky sand loam.
 No timber.
 Undergrowth, shadscale, sagebrush, and greasewood.

Dependent Resurvey of the East Boundary, T. 10 S., R. 19 W.

Reestablishment of the Survey Executed by Joseph
 Gorlinski in 1875.

From the standard cor. of T. 10 S., Rs. 18 and 19 W.

N. 0° 01' E., bet. secs. 31 and 36.

Over mountainous land through scattered timber and sagebrush.

Desc. 125 ft. over NW. slope.

0.05 Fence, bears E. and W.

5.90 Draw, drains SW., asc. 25 ft. over SW. slope.

10.05 Small wash, drains SW., asc. 175 ft. over SE. slope.

16.00 Spur, slopes SW., asc. 350 ft. over SW. slope.

28.00 Spur, slopes sharply W., desc. 440 ft. over steep, rocky N. slope.

39.77 The $\frac{1}{4}$ sec. cor. of secs. 31 and 36, monumented with a granite stone, 10x12x20 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 10 ins. in the ground to bedrock and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T10S
 R19W R18W
 $\frac{1}{4}$
 S36 | S31
 1962

bury original stone cor. alongside the iron post, and raise a mound of stone, 3 $\frac{1}{2}$ ft. base, 2 ft. high, W. of cor.

N. 0° 10' W., beginning new measurement.

Desc. 120 ft. over steep N. slope.

4.70 Fork of Deep Creek, with stream of water, 5 lks. wide, 1 ft. deep, flows NW., asc. 230 ft. over rocky SW. slope. Enter medium to scattered mahogany.


Dependent Resurvey of the East Boundary, T. 10 S., R. 19 W.

CHAINS

- 20.20 Spur slopes W., desc. 225 ft. over rocky NW. slope.
- 32.50 Draw, drains W. about 4.00 chs., thence SW., asc. 125 ft. over SW. slope.
- 39.94 The cor. of secs. 25, 30, 31 and 36, monumented with a granite stone, 10x12x20 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.



bury original stone cor. alongside the iron post.

Land, mountainous.

Soil, rocky.

Timber, scattered aspen, mahogany, and spruce.

Undergrowth, grass and sagebrush.

N. 0° 10' W., along the E. bdy. of sec. 25.

Over mountainous land, through scattered timber and dense june grass.

Asc. 155 ft. over SW. slope.


7.00 Slope changes, asc. 240 ft. over S. slope.

23.50 Spur slopes irregularly SW., desc. 170 ft. over N. slope. Leave dense grass and timber. Enter dense sagebrush.

33.70 Slope changes, desc. 195 ft. over steep NE. slope.

40.51 Point for the ¼ sec. cor. of secs. 25 and 30 at proportionate dist.; there is no remaining evidence of the original cor. This cor. will now function as the E. ¼ sec. cor. of sec. 25, T. 10 S., R. 19 W., only.

Set an iron post, 30 ins. long, 2½ ins. diam., 15 ins. in the ground to bedrock and in a mound of stone, 3 ft. base to top, with brass cap mkd.



Thence by triangulation, desc. about 350 ft. over steep NE. slope. Topography approximated.

51.50 Bottom of Canyon, drains NW., asc. about 150 ft. over SW. slope.

52.40 Unimproved road, bears NW. and SE.

65.00 Unimproved road, bears NW. and curves S., asc. about 300 ft. over SW. slope.

Independent Resurvey of the East Boundary of T. 10 S., R. 19 W.

CHAINS

81.02

The cor. of secs. 19, 24, 25 and 30, monumented with a limestone, 8x12x16 ins., set, mkd. and witnessed as described in the official record. This cor. will now function as the cor. of secs. 24 and 25, T. 10 S., R. 19 W., only.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground, to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T10S
R19W R18W
S24 |
S25 |
1962

bury original stone cor. alongside iron post.

Land, mountainous.
Soil, rocky loam.
Timber, scattered pinon, juniper and mahogany.
Undergrowth, sagebrush and grass.

N. 0° 21' E., along the E. bdy. of sec. 24.

Over mountainous land through medium pinon and juniper timber.

Asc. 10 ft. over SW. slope.

1.00 Road, unimproved, bears N. 65° W. and S. 65° E., asc. 40 ft. over SW. slope.

4.00 Spur, slopes NW.; desc. 565 ft. over steep NW. slope.

24.80 Draw, drains irregularly W.; asc. 145 ft. over SW. slope.

26.65 Road, unimproved, bears NW. and SE.

39.99 Point for the ¼ sec. cor. of secs. 19 and 24 at proportionate dist.; there is no remaining evidence of the original cor. This cor. will now function as the E. ¼ sec. cor. of sec. 24, T. 10 S., R. 19 W., only.

Set an iron post, 30 ins. long, 2½ ins. diam., on solid stone, and in a mound of stone 3½ ft. base to tope, with brass cap mkd.

T10S
R19W R18W
¼
S24 |
1962

Asc. 15 ft. over SW. slope.

41.80 Spur, slopes W.; desc. 130 ft. over NW. slope.

49.80 Draw, drains SW.

50.30 Road, unimproved, bears NE. and SW.; asc. 330 ft. over rocky SE. slope.

63.20 Spur, slopes SW.; asc. 40 ft. along rocky W. slope.

73.20 Spur, slopes W.; desc. 225 ft. over steep, rocky N. s.

Dependent Resurvey of the East Boundary, T. 10 S., R. 19 W.

CHAINS
79.98

The cor. of secs. 13, 18, 19 and 24, monumented with a limestone, 8x15x17 ins., set, mkd. and witnessed as described in the official record. This cor. will now function as the cor. of secs. 13 and 24, T. 10 S., R. 19 W., only.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 15 ins. in the ground to bedrock and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T10S
R19W R18W
S13 |
S24 |
1962

bury original stone cor. alongside iron post.

Land, mountainous.
Soil, rocky loam.
Timber, medium dense pinon and juniper.
Undergrowth, sagebrush and grass.

N. 0° 17' W., along the E. bdy. of sec. 13.

Over mountainous land through dense timber.

By triangulation, desc. about 100 ft. over N. slope; topography approximated.

- 3.00 Draw, drains NW.; asc. about 300 ft. over SW. slope.
- 15.00 Spur, slopes W.,; desc. about 350 ft. over N. slope.
- 25.00 Draw, drains W.; asc. about 400 ft. over S. slope.
- 36.60 Spur, slopes W. End triangulation. Desc. 95 ft. over steep N. slope.
- 40.22 Point for the ¼ sec. cor. of secs. 13 and 18 at proportionate dist.; there is no remaining evidence of the original cor. This cor. will now function as the E. ¼ sec. cor. of sec. 13, T. 10 S., R. 19 W. only.

Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to bedrock, and in a mound of stone, 3½ ft. base to top, with brass cap mkd.

T10S
R19W R18W
¼
S13 |
1962

Desc. 95 ft. over N. slope.

- 43.10 Draw, drains NW.; desc. 105 ft. along W. slope.
- 47.80 Spur, slopes W.; desc. 80 ft. over NW. slope.
- 52.10 Small draw, drains NW.; desc. 170 ft. over rolling NW. slope.
- 61.80 Wash, 10 lks. wide, 2 ft. deep, drains W.
- 65.90 Small draw, drains NW.

Dependent Resurvey of the East Boundary, T. 10 S., R. 19 W.

CHAINS

- 67.90 Jeep trail, bears E. and W.
- 73.50 Wash, 10 lks. wide, 3 ft. deep, drains W.; asc. 70 ft. over S. slope.
- 75.30 Jeep trail, bears E. and W., on spur, slopes W.; desc. 30 ft. over N. slope.
- 77.20 Wash, 15 lks. wide, 4 ft. deep, drains W.; asc. 40 ft. over S. slope.
- 80.44 The cor. of secs. 7, 12, 13 and 18, monumented with a limestone, 8x15x24 ins., set, mkd. and witnessed as described in the official record. This cor. will now function as the cor. of secs. 12 and 13, T. 10 S., R. 19 W. only.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., on solid stone, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T10S
R19W R18W
S12 |
S13 |
1962

bury original stone cor. alongside iron post.

Land, mountainous.
Soil, rocky loam.
Timber, dense pinon, juniper, and mahogany.
Undergrowth, sagebrush and buckbrush.

N. 0° 05' E., along the E. bdy. of sec. 12.

Over mountainous land through medium dense timber.

Asc. 20 ft. over S. slope.

- 2.80 Spur, slopes SW.; desc. 160 ft. over NW. slope.
- 11.85 Draw, drains W.; asc. 125 ft. over SW. slope.
- 20.85 Spur, slopes W., desc. 170 ft. over NW. slope.
- 30.75 Draw, drains W.; asc. 125 ft. over SW. slope.
- 39.91 Point for the ¼ sec. cor. of secs. 7 and 12 at proportionate dist.; there is no remaining evidence of the original cor. This cor. will now function as the E. ¼ sec. cor. of sec. 12, T. 10 S., R. 19 W. only.

Set an iron post, 30 ins. long, 2½ ins. diam., 4 ins. in the ground to bedrock, and in a mound of stone, 3½ ft. base to top with brass cap mkd.

T10S
R19W R18W
¼
S12 |
1962

Cor. located on spur, slopes NW.

Desc. 135 ft. over NE. slope.

Dependent Resurvey of the East Boundary, T. 10 S., R. 19 W.

CHAINS

- 48.00 Wash, 50 lks. wide, 2 ft. deep, drains NW.; desc. 75 ft. over rolling land.
- 51.20 Bladed road, bears E. and W.
- 55.20 Road, unimproved, bears E. and W.
- 73.55 Wash, 20 lks. wide, 4 ft. deep, drains W.
- 79.82 The cor. of secs. 1, 6, 7 and 12, monumented with a limestone, 10x12x24 ins., set, mkd. and witnessed as described in the official record. This cor. will now function as the cor. of secs. 1 and 12, T. 10 S., R. 19 W. only.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground and in a collar of stone to top, with brass cap mkd.

T10S
R19W R18W
— S1 |
S12 |
1962

bury original stone cor. alongside iron post.

Land, mountainous S. portion; rolling N. portion.
Soil, rocky loam.
Timber, medium dense pinon and juniper.
Undergrowth, sagebrush and scattered buckbrush.

N. 0° 15' E., along the E. bdy. of sec. 1.

Over gently rolling land through medium timber and dense sagebrush.

Desc. 80 ft. along rolling W. slope.

- 1.65 Jeep trail, bears E. and W.
- 6.85 Wash, 30 lks. wide, 3 ft. deep, drains NW.
- 13.25 Wash, 20 lks. wide, 3 ft. deep, drains W.
- 20.05 Road, unimproved, bears E. and W.
- 30.95 Wash, 10 lks. wide, 2 ft. deep, drains W.
- 39.87 The ¼ sec. cor. of secs. 1 and 6, monumented with a limestone, 4x12x18 ins., set, mkd. and witnessed as described in the official record. This cor. will now function as the E. ¼ sec. cor. of sec. 1, T. 10 S., R. 19 W. only.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 16 ins. in the ground to bedrock and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T10S
R19W R18W
¼
— S1 |
1962

bury original stone cor. alongside iron post.

Dependent Resurvey of the East Boundary, T. 10 S., R. 19 W.

CHAINS

- N. 0° 12' E., beginning new measurement.
- Asc. 80 ft. over gently rolling land.
- 12.05 Wash, 20 lks. wide, 1 ft. deep, drains W.
- 34.15 Road, unimproved, bears E. and W.
- 35.90 Small wash, drains NW.
- 40.03 The cor. of Tps. 9 and 10 S., Rs. 18 and 19 W., monumented with a limestone, 12x18x26 ins., set, mkd. and witnessed as described in the official record.
- At the cor. point
- Set an iron post, 30 ins. long, 2½ ins. diam., 14 ins. in the ground to bedrock and in a mound of stone, 3 ft. base to top, with brass cap mkd.
- | | |
|-----------|-----|
| T9S | |
| R19W R18W | |
| S36 | S31 |
| S1 | S6 |
| T10S | |
| 1962 | |
- Land, gently rolling.
Soil, rocky loam.
Timber, medium pinon and juniper.
Undergrowth, dense sagebrush.

Survey of a Portion of the Subdivision, T. 10 S., R. 18 W.

- From the standard cor. of secs. 35 and 36, on the S. bdy. of the Tp.
- N. 0° 04' E., bet. secs. 35 and 36.
- Over broken, mountainous land, through dense pinon and juniper timber.
- Asc. 45 ft. along rocky E. slope.
- 3.90 Ledy spur, slopes E., thence by triangulation, desc. about 200 ft. over very broken and ledgy NE. slope. Leave dense timber, bears E. and NW., enter widely scattered timber. Topography approximated.
- 12.00 Ledy draw, drains N. 80° E., asc. about 50 ft. over ledgy SE. slope.
- 20.00 Rocky spur, slopes NE., desc. about 100 ft. along very broken E. slope.
- 25.60 Point of ledgy spur, ledge, 50 ft. high, slopes NE.; desc. abruptly about 200 ft. over broken, ledgy NE. slope.
- 33.00 Point of narrow ledgy spur, slopes NE. End triangulation.
- 33.15 Point selected for the witness ¼ sec. cor. of secs. 35 and 36.
- Set an iron post, 30 ins. long, 2½ ins. diam., on solid stone, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T10S R18W

¼	
S35	S36
W	C
1962	

Survey of a Portion of the Subdivision, T. 10 S., R. 18 W.

CHAINS	<p>raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.</p> <p>Thence by triangulation, desc. abruptly about 250 ft. over broken, ledgy NW. slope.</p>				
40.00	<p>Point for the ¼ sec. cor. of secs. 35 and 36 falls on very broken NW. slope, and is deemed unsafe to perpetuate.</p> <p>Desc. about 250 ft. over ledgy NW. slope.</p>				
45.00	<p>Bottom of canyon, with stream of clear water, 4 lks. wide, 2 ins. deep, flows SE.</p>				
45.30	<p>Road, unimproved, bears NW. and SE.; asc. about 1,000 ft. over broken, precipitous SE. slope.</p>				
69.50	<p>Top of ledge, 100 ft. high, bears E. and W., end triangulation. Asc. 65 ft. along E. slope. Enter dense timber.</p>				
75.50	<p>Top of ascent, slopes E.; desc. 145 ft. over NE. slope.</p>				
80.00	<p>Point for the cor. of secs. 25, 26, 35 and 36.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to bedrock and in a mound of stone, 3 ft. base to top, with brass cap mkd.</p> <div style="text-align: center;"> <p>T10S R18W</p> <table border="1" style="margin: auto;"> <tr> <td>S26</td> <td>S25</td> </tr> <tr> <td>S35</td> <td>S36</td> </tr> </table> <p>1962</p> </div> <p>Land, mountainous, very broken. Soil, rocky loam. Timber, dense pinon and juniper N. and S. portions; widely scattered pinon and juniper central portion. Undergrowth, sagebrush, buckbrush and oak brush.</p>	S26	S25	S35	S36
S26	S25				
S35	S36				
	<p>From the cor. of secs. 25, 30, 31 and 36, on the E. bdy. of the Tp.</p> <p>S. 89° 54' W., bet. secs. 25 and 36.</p> <p>Over broken, mountainous land through scattered timber.</p> <p>By triangulation, asc. about 500 ft. over broken SE. slope Topography approximated.</p>				
12.00	<p>Wash, drains SE.</p>				
27.15	<p>Top of ledge, 30 ft. high, bears irregularly N. and S. End triangulation. Asc. 35 ft. over NE. slope. Enter dense timber.</p>				
29.35	<p>Point of rocky spur, slopes N. 1.50 chs. to end; desc. 20 ft. over NW. slope.</p>				
31.65	<p>Small wash, drains N. 2.00 chs. to draw, drains E.; asc. 165 ft. along rocky N. slope.</p>				
40.02	<p>Point for the ¼ sec. cor. of secs. 25 and 36.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground to bedrock and in a mound of stone, 3 ft. base to top, with brass cap mkd.</p>				

Survey of a Portion of the Subdivision, T. 10 S., R. 18 W.

CHAINS

T10S R18W

S25

S36

1962

- Cor. located at base of ledge, 8 ft. high, facing N.
Asc. 320 ft. along broken, ledgy N. slope.
- 49.05 Point of ledgy spur, ledge 50 ft. high, bears S. and SW.; asc. 50 ft. along ledgy N. slope.
- 51.60 Head of rocky draw, drains NE.; asc. 605 ft. over steep, rocky NE. slope.
- 80.04 The cor. of secs. 25, 26, 35 and 36.

Land, broken, mountainous.
Soil, rocky loam, exposed limestone and granite ledges.
Timber, scattered pinon and juniper E. portion; dense pinon and juniper W. portion.
Undergrowth, medium sagebrush E. portion.

From the standard cor. of secs. 33 and 34, on the S. bdy. of the Tp.

N. 0° 03' E., bet. secs. 33 and 34.

Over mountainous land through dense mahogany timber.

By triangulation, asc. about 200 ft. over SE. slope. Topography approximated.

- 15.00 Draw, drains SE.; asc. about 950 ft. over steep S. slope.
- 40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 33 and 34. End triangulation.
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 8 ins. in the ground to bedrock, and in a mound of stone, $3\frac{1}{2}$ ft. base to top, with brass cap mkd.

T10S R18W

 $\frac{1}{4}$

S33 | S34

1962

- Asc. 260 ft. over steep S. slope.
- 46.20 Rocky ridge, bears irregularly E. and W.; desc. 1,055 ft. over steep N. slope. Enter dense spruce and fir timber. Leave mahogany timber.
- 77.30 Draw, drains NE.; desc. 25 ft. over NE. slope.
- 80.00 Point for the cor. of secs. 27, 28, 33 and 34.
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 2 ins. in the ground to bedrock, and in a mound of stone, 6 ft. base to top, with brass cap mkd.

T10S R18W

S28 | S27

S33 | S34

1962

Survey of a Portion of the Subdivision, T. 10 S., R. 18 W.

CHAINS

Land, mountainous, steep,
Soil, rocky loam.
Timber, dense mahogany S. portion; dense spruce and fir N. portion.
Undergrowth, grass, sagebrush.

N. 0° 03' E., bet. secs. 27 and 28.

Over mountainous land through dense timber.

By triangulation, desc. about 150 ft. over NE. slope.

10.00 Bottom of canyon, drains E.; asc. 125 ft. over steep S. slope.

20.00 Spur, slopes E.; desc. about 250 ft. over NE. slope.

28.00 Draw, drains SE.; asc. about 420 ft. over steep S. slope. Enter mahogany timber.

40.00 Point for the 1/2 sec. cor. of secs. 27 and 28. End triangulation.

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 12 ins. in the ground to bedrock and in a mound of stone, 3 1/2 ft. base to top, with brass cap mkd.

T10S R18W

1/2
S28 | S27
1962

Asc. 665 ft. over steep S. slope.

44.65 Leave dense timber, bears E. and W., enter sagebrush and scattered timber.

57.00 Leave sagebrush, enter dense timber.

60.00 Ridge, bears E. and W.; desc. 715 ft. over steep N. slope.

80.00 Point for the cor. of secs. 21, 22, 27 and 28.

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 8 ins. in the ground to bedrock, and in a mound of stone 3 ft. base to top, with brass cap mkd.

T10S R18W

S21 | S22
S28 | S27
1962

Land, mountainous.
Soil, rocky loam.
Timber, dense fir, spruce and mahogany.
Undergrowth, sagebrush and grass.

N. 0° 03' E., bet. secs. 21 and 22.

Over mountainous land through dense timber.

By triangulation, desc. about 150 ft. over N. slope.

5.00 Draw, drains NE.; asc. about 100 ft. over SE. slope.

Survey of a Portion of the Subdivision, T. 10S R. 18W

CHAINS

15.00 Spur, slopes NE.; desc. about 400 ft. over steep N. slope.

40.00 Point for the $\frac{1}{2}$ sec. cor. of secs. 21 and 22. End triangulation.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, $3\frac{1}{2}$ ft. base to top, with brass cap mkd.

T10S R18W

$$\begin{array}{c} \frac{1}{2} \\ S21 | S22 \\ 1962 \end{array}$$

By triangulation, desc. about 100 ft. over NE. slope.

50.00 Bottom of Reilly Creek, drains E.; asc. about 200 ft. over S. slope. Enter dense mahogany and scattered pine timber.

64.75 Spur, slopes E. End triangulation. Desc. 215 ft. over N. slope.

74.00 Leave dense timber, enter sagebrush and scattered timber.

76.00 Draw, drains E.; asc. 30 ft. over S. slope.

80.00 Point for the cor. of secs. 15, 16, 21 and 22.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 14 ins. in the ground to bedrock and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T10S R18W

$$\begin{array}{c} S16 | S15 \\ \hline S21 | S22 \\ 1962 \end{array}$$

Land, mountainous.
Soil, rocky loam.
Timber, dense pine, fir, spruce and mahogany.
Undergrowth, sagebrush.

N. $0^{\circ} 03'$ E., bet. secs. 15 and 16.

Over mountainous land through dense timber.

By triangulation, asc. 20 ft. over SE. slope.

2.00 Small spur, slopes NE., desc. about 300 ft. over NE. slope.

20.00 Bottom of canyon, drains E.; asc. about 400 ft. over steep S. slope.

40.00 Point for the $\frac{1}{2}$ sec. cor. of secs. 15 and 16 End triangulation.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins. in the ground to bedrock and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T10S R18W

$$\begin{array}{c} \frac{1}{2} \\ S16 | S15 \\ 1962 \end{array}$$

Survey of a Portion of the Subdivision, T. 10 S., R. 18 W.

CHAINS

By triangulation, asc. about 450 ft. over steep S. slope.
 73.25 Ridge, bears E. and NE. End triangulation. Desc. 105 ft. over N. slope.
 80.00 Point for the cor. of secs. 9, 10, 15 and 16.
 Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to bedrock and in a mound of stone, 3½ ft. base to top, with brass cap mkd.

T10S R18W
 S9 | S10
 S16 | S15
 1962

Land, mountainous.
 Soil, rocky loam.
 Timber, dense pine, fir, spruce and mahogany.
 Undergrowth, sagebrush, grass and oak brush.

N. 0° 03' E., bet. secs. 9 and 10.

Over mountainous land through dense timber.

Desc. 675 ft. over NE. slope.

24.00 Spur, slopes NE.; desc. 300 ft. over NW. slope.

40.00 Point for the ¼ sec. cor. of secs. 9 and 10.

Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T10S R18W
 ¼
 S9 | S10
 1962

Desc. 360 ft. over NW. slope.

51.15 Ledge, bears E. and W., desc. 580 ft. over steep, rocky N. slope.

65.00 Bottom of Pole Creek, drains E.; asc. 195 ft. over S. slope.

71.95 Spur, slopes E.; desc. 40 ft. over N. slope.

73.35 Small draw, drains SE.; asc. 290 ft. over steep S. slope.

80.00 Point for the cor. of secs. 3, 4, 9 and 10.

Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground to bedrock, and in a mound of stone, 3½ ft. base to top, with brass cap mkd.

T10S R18W
 S4 | S3
 S9 | S10
 1962

Land, mountainous.
 Soil, rocky clay loam.
 Timber, dense pine, fir, mahogany, and spruce.
 Undergrowth, sagebrush, oak brush and grass.

Survey of a Portion of the Subdivision, T. 10 S., R. 18 W.

CHAINS

N. 0° 08' W., bet. secs. 3 and 4.

Over mountainous land through dense timber.

Asc. 390 ft. over steep S. slope.

17.70 Spur, slopes E.; desc. 640 ft. over steep N. slope.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 3 and 4.Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 12 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T10S R18W

 $\frac{1}{4}$
 S4|S3
 1962

Desc. 360 ft. over steep N. slope.

78.00 Draw, drains E.; asc. 30 ft. over SE. slope.

80.84 The cor. of secs. 3, 4, 33 and 34, on the N. bdy. of the Tp. monumented with a $2\frac{1}{2}$ in. iron post, set, mkd. and witnessed as described in the 1962 field notes of the S. bdy. of T. 9 S., R. 18 W.

Land, mountainous.
 Soil, rocky loam.
 Timber, dense fir, pine, spruce and mahogany.
 Undergrowth, sagebrush, oa, brush, and grass.

From the cor. of secs. 1, 2, 35 and 36, on the N. bdy. of the Tp., monumented with a $2\frac{1}{2}$ in. iron post, set, mkd. and witnessed as described in the 1962 field notes of the S. bdy., T. 9 S., R. 18 W.

S. 0° 04' W., bet. secs. 1 and 2.

Over rolling desert land through dense sagebrush and scattered timber.

Asc. 35 ft. over gentle NW. slope.

5.00 Spur, slopes NE.; asc. 40 ft. over gentle NE. slope.

7.00 Wash, 20 lks. wide, 2 ft. deep, drains NE.

10.30 Old road, bears NE. and SW.

15.00 Spur, slopes NE.; desc. 75 ft. along gentle E. slope.

15.60 Old road, bears irregularly E. and W.

17.00 Wash, 5 lks. wide, 2 ft. deep, drains E.

21.20 Wash, 10 lks. wide, 1 ft. deep, drains E.

27.00 Wash, 10 lks. wide, 3 ft. deep, drains E.

36.30 Wash, 10 lks. wide, 1 ft. deep, drains SE.

38.00 Wash, 20 lks. wide, 4 ft. deep, drains N. 80° E.; asc. 30 ft. over gentle NW. slope.

41.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 1 and 2.

Survey of a Portion of the Subdivision, T. 10 S., R. 18 W.

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in/ the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T10S R18W

½
S2 | S1
1962

Asc. 115 ft. over NW. slope. Enter medium dense timber.

55.40 Slope changes; asc. 40 ft. along rolling E. slope, over series of small spurs and washes draining E.

59.10 Wash, 20 lks. wide, 3 ft. deep, drains E.

68.20 Slope changes; desc. 25 ft. over SE. slope.

73.50 Small draw, drains E.; asc. 120 ft. over NE. slope.

81.02 Point for the cor. of secs. 1, 2, 11 and 12, at a calculated dist.

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 3½ ft. base to top, with brass cap mkd.

T10S R18W

S2 | S1
S11 | S12
1962

Land, rolling desert.

Soil, rocky clay loam.

Timber, scattered pinon and juniper N. portion; medium dense pinon and juniper S. portion.

Undergrowth, sagebrush.

From the cor. of secs. 2, 3, 34 and 35, on the N. bdy. of the Tp., monumented with a 2½ in. iron post, set, mkd. and witnessed as described in the 1962 field notes of the S. bdy., T. 9 S., R. 18 W.

S. 0° 04' W., bet. secs. 2 and 3.

Over broken, mountainous land through medium dense timber.

By triangulation, desc. about 200 ft. over S. slope.

10.00 Wash, in canyon, drains E.; asc. about 500 ft. over ledgy NE. slope.

33.00 Slope changes; asc. about 200 ft. along ledgy E. slope.

40.93 Point for the ¼ sec. cor. of secs. 2 and 3. End triangulation.

Set an iron post, 30 ins. long, 2½ ins. diam., on solid stone, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T10S R18W

½
S3 | S2
1962

Cor. located on N. side of large boulder on E. slope.

- CHAINS
- Survey of a Portion of the Subdivision, T. 10 S. R. 18 W.
By triangulation, asc. about 150 ft. along broken, ledgy E. slope.
- 55.80 Ledgy point, projects E. 1.00 ch. to end. End triangulation. Asc. 70 ft. along E. slope.
- 67.00 Top of ascent, slopes E., desc. 15 ft. along E. slope.
- 69.50 Slope changes; desc. 60 ft. over S. slope.
- 76.80 Top of ledges, bears irregularly E. and W.; desc. abruptly 200 ft. over precipitous S. slope.
- 78.30 Small rocky draw, drains SE.; asc. 50 ft. over NE. slope.
- 80.93 Point for the cor. of secs. 2, 3, 10 and 11 at a calculated dist.
- Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.
- | | |
|-----------|-----|
| T10S R18W | |
| S3 | S2 |
| S10 | S11 |
| 1962 | |
- Cor. located at base of small ledge facing E.
- Land, broken, mountainous.
Soil, rocky loam, exposed limestone and granite ledges.
Timber, medium dense pinon and juniper.
Undergrowth, sagebrush and grass.
-
- From the cor. of secs. 1, 2, 11 and 12.
- N. 89° 56' W., bet. secs. 2 and 11.
- Over mountainous land through medium dense timber.
- Asc. 835 ft. over steep E. slope along top of spur.
- 40.03 Point for the ½ sec. cor. of secs. 2 and 11.
- Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.
- | | |
|-----------|-----|
| T10S R18W | |
| ½ | S2 |
| S10 | S11 |
| 1962 | |
- Asc. 265 ft. over E. slope, along top of spur.
- 51.40 Slope changes; asc. 60 ft. along S. slope.
- 56.10 Top of ascent, slopes S., thence by triangulation; desc. about 200 ft. along badly broken and ledgy S. slope.
- 65.00 Ledgy draw, drains S.; asc. about 100 ft. over broken SE. slope.
- 75.00 Small draw, drains SE.; asc. about 75 ft. over NE. slope.
- 80.06 The cor. of secs. 2, 3, 10 and 11.

Survey of a Portion of the Subdivision, T. 10 S., R. 18 W.

CHAINS

Land, mountainous, broken.
Soil, rocky clay loam, exposed limestone ledges.
Timber, scattered to medium dense pinon and juniper.
Undergrowth, sagebrush and grass.

From the standard cor. of secs. 32 and 33, on the S. bdy. of the Tp.

N. 0° 02' E., bet. secs. 32 and 33.

Over mountainous land through dense aspen and scattered pine and fir timber.

Asc. 250 ft. over SE. slope.

15.20 Top of ascent, slopes E.; desc. 175 ft. over rocky NE. slope.

26.50 Slope changes; asc. 10 ft. along rocky E. slope.

31.50 Top of ascent, slopes E.; desc. 65 ft. over NE. slope.

39.00 Leave timber, bears NW. and NE., enter dense sagebrush and grass.

40.00 Point for the 1/4 sec. cor. of secs. 32 and 33.

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 8 ins. in the ground to bedrock, and in a mound of stone, 3 1/2 ft. base to top, with brass cap mkd.

T10S R18W

1/4
S32 | S33
1962

Desc. 60 ft. over NE. slope.

43.50 Small draw, drains NE.; desc. 140 ft. over NE. slope.

63.40 Fork of Basin Creek, drains SE.; asc. 490 ft. over steep S. slope. Enter scattered timber.

80.00 Point for the cor. of secs. 28, 29, 32 and 33.

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 3 1/2 ft. base to top, with brass cap mkd.

T10S R18W

S29 | S28
S32 | S33
1962

Land, mountainous.
Soil, rocky gravelly loam.
Timber, medium dense aspen and pine S. portion; scattered pine N. portion.
Undergrowth, dense sagebrush and grass N. portion.

From the cor. of secs. 27, 28, 33 and 34.

N. 89° 48' W., bet. secs. 28 and 33.

Over mountainous land through dense timber.

Survey of a Portion of the Subdivision, T. 10 S., R. 18 W.

CHAINS

By triangulation, asc. about 800 ft. over steep NE. slope

39.99 Point for the $\frac{1}{2}$ sec. cor. of secs. 28 and 33.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T10S R18W

$$\begin{array}{r} S28 \\ \frac{1}{2} S33 \\ 1962 \end{array}$$

Asc. 25 ft. over NE. slope. Leave dense timber and enter scattered timber.

41.50 Ridge, bears NW. and SE. End triangulation. Desc. 160 ft. over SW. slope.

64.80 Head of draw, drains S.; asc. 70 ft. along S. slope.

68.90 Top of ascent, slopes S.; desc. 65 ft. along S. slope.

79.98 The cor. of secs. 28, 29, 32 and 33.

Land, mountainous.

Soil, rocky gravelly loam.

Timber, dense pine and spruce E. portion; scattered W. portion.

Undergrowth, sagebrush, oak brush and grass.

N. $0^{\circ} 02' E.$, bet. secs. 28 and 29.

Over mountainous land through widely scattered timber.

Asc. 150 ft. over S. slope.

6.40 Slope changes; asc. 300 ft. over SW. slope.

22.40 Main ridge of Deep Creek Mountains, bears NE. and SW.; desc. 55 ft. over NW. slope. Enter dense timber.

26.20 Head of draw, drains W.; asc. 10 ft. along rocky steep W. slope.

38.20 Spur, slopes W.; desc. 20 ft. over steep NW. slope.

39.10 Point selected for the witness $\frac{1}{2}$ sec. cor. of secs. 28 and 29.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 15 ins. in the ground to bedrock and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T10S R18W

$$\begin{array}{c} \frac{1}{2} \\ W C \\ \uparrow \\ S29 | S28 \\ 1962 \end{array}$$
40.00 Point for the $\frac{1}{2}$ sec. cor. of secs. 28 and 29 falls on steep NW. slope subject to rock and snow slides, and is deemed unsafe to perpetuate.

Thence by triangulation; desc. about 500 ft. over steep rocky NW. slope.

Survey of a Portion of the Subdivision, T. 10 S., R. 18 W.

CHAINS

76.95 End triangulation, desc. 50 ft. over NW. slope.

80.00 Point for the cor. of secs. 20, 21, 28 and 29.

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock and in a mound of stone, 3½ ft. base to top, with brass cap mkd.

T10S R18W
 $\frac{S20}{S29} \frac{S21}{S28}$
 1962

Land, mountainous.
 Soil, rocky loam.
 Timber, scattered pine S. portion; dense pine, spruce N. portion.
 Undergrowth, sagebrush, oak brush and grass.

From the cor. of secs. 21, 22, 27 and 28.

N. 89° 47' W., bet. secs. 21 and 28.

Over mountainous land through dense timber.

Asc. 115 ft. along N. slope.

7.00 Spur, slopes N., thence by triangulation; desc. about 250 ft. over NW. slope.

38.55 Bottom of descent, slopes N.; asc. 20 ft. over NE. slope. End triangulation.

40.03 Point for the ¼ sec. cor. of secs. 21 and 28.

Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to bedrock and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T10S R18W
 $\frac{S21}{\frac{1}{4} S28}$
 1962

Asc. 90 ft. over rocky NE. slope.

45.55 Base of ledges, bears NW. and SE; asc. abruptly 210 ft. over broken NE. slope.

48.95 Top of ledge, 20 ft. high, bears NW. and SE.; asc. 190 ft. over E. slope.

53.05 Top of ledge, 20 ft. high, bears N. and S.; asc. 180 ft. over broken E. slope.

58.00 Main ridge of Deep Creek Mountains, bears N. and S.; desc. 710 ft. over steep NW. slope.

80.06 The cor. of secs. 20, 21, 28 and 29.

Land, mountainous.
 Soil, rocky loam, exposed limestone ledges.
 Timber, dense pine, fir and spruce, scattered aspen.
 Undergrowth, sagebrush, oak brush and grass.

Survey of a Portion of the Subdivision, T. 10 S. R. 18 W.
N. 0° 02' E., bet. secs. 20 and 21.

CHAINS

Over mountainous land through scattered timber.

By triangulation, desc. about 250 ft. over NW. slope.

18.00 Draw, drains W.; asc. about 100 ft. over SW. slope.

25.00 Spur, slopes W.; desc. about 50 ft. over NW. slope.

35.00 Draw, drains W.; asc. about 70 ft. over SW. slope.

40.00 Point for the 1/4 sec. cor. of secs. 20 and 21. End triangulation.

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 10 ins. in the ground to bedrock and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T10S R18W
1/4
S20|S21
1962

Asc. 60 ft. over SW. slope.

51.10 Enter dense timber, bears E. and W.; asc. 230 ft. over SW. slope.

63.10 Spur, slopes W.; desc. 200 ft. over NW. slope.

80.00 Point for the cor. of secs. 16, 17, 20 and 21.

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 10 ins. in the ground to bedrock and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T10S R18W
S17|S16
S20|S21
1962

from which

A pine, 12 ins. diam., bears N. 26° 35' E., 59 lks. dist., mkd. T10S R18W S16 BT.

A pine, 12 ins. diam., bears N. 27° 40' W., 79 lks. dist., mkd. T10S R18W S17 BT.

Land, mountainous.

Soil, rocky loam.

Timber, scattered pine, fir S. portion; dense pine, fir N. portion.

Undergrowth, dense sagebrush, oak brush S. portion.

From the cor. of secs. 15, 16, 21 and 22:

N. 89° 48' W., bet. secs. 16 and 21.

Over mountainous land through dense sagebrush.

Asc. 465 ft. over steep NE. slope.

22.10 Spur, slopes NE.; desc. 240 ft. over NW. slope. Enter dense timber bears N. and S.

Survey of a Portion of the Subdivision, T. 10 S., R. 18 W.

CHAINS
40.05

Point for the $\frac{1}{4}$ sec. cor. of secs. 16 and 21.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins. in the ground to bedrock and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T10S R18W
 S16
 $\frac{1}{4}$ S21
1962

Asc. 170 ft. over NE. slope.

41.60 Draw, drains NE., from irregularly W.; asc. 170 ft. along N. slope.

49.10 Same draw, drains E.; asc. 230 ft. over NE. slope. Timber becomes scattered.

71.80 Main ridge of Deep Creek Mountains, bears irregularly N. and S.; desc. 250 ft. over W. slope. Enter dense timber.

80.10 The cor. of secs. 16, 17, 20 and 21.

Land, mountainous.
Soil, rocky loam.
Timber, dense pine, fir, W. portion; scattered central and E. portion.
Undergrowth, dense sagebrush, oak brush and grass.

N. $0^{\circ} 02'$ E., bet. secs. 16 and 17.

Over mountainous land through dense timber.

3.00 Leave dense timber, bears W. and NE., enter dense sagebrush and widely scattered pine timber. Desc. 230 ft. along steep W. slope.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 16 and 17.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 12 ins. in the ground to bedrock and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T10S R18W
 $\frac{1}{4}$
S17 | S16
1962

Desc. 70 ft. along W. slope.

53.20 Head of draw, drains W.; asc. 200 ft. along W. slope.

80.00 Point for the cor. of secs. 8, 9, 16 and 17.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins. in the ground to bedrock and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T10S R18W
 S8 | S9
S17 | S16
1962

Land, mountainous.
Soil, gravelly loam.

Survey of a Portion of the Subdivision T. 10 S. R. 18 W.

CHAINS

Timber, dense pine S. portion; widely scattered pine N. portion.

Undergrowth, dense sagebrush and grass.

From the cor. of secs. 9, 10, 15 and 16.

N. 89° 47' W., bet. secs. 9 and 16.

Over mountainous land through dense timber.

Desc. 200 ft. along steep N. slope.

25.00 Bottom of descent; asc. 200 ft. along N. slope.

40.06 Point for the $\frac{1}{4}$ sec. cor. of secs. 9 and 16.

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 12 ins. in the ground to bedrock and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T10S R18W
 $\frac{1}{4}$ $\frac{S9}{S16}$
 1962

Asc. 30 ft. along N. slope.

46.60 Small spur slopes N.; desc. 100 ft. along N. slope.

70.90 Main ridge of Deep Creek Mountains, bears irregularly N. and S.; desc. 260 ft. over steep W. slope. Leave timber, enter dense sagebrush, bears N. and S.

80.12 The cor. of secs. 8, 9, 16 and 17.

Land, mountainous.

Soil, rocky loam.

Timber, dense pine, spruce and fir E. portion. No timber W. portion.

Undergrowth, grass with dense sagebrush W. portion.

N. 0° 02' E., bet. secs. 8 and 9.

Over mountainous land through widely scattered timber.

Asc. 40 ft. along steep W. slope.

17.30 Top of ascent, slopes W.; desc. 75 ft. over NW. slope.

22.10 Main ridge of Deep Creek Mountains bears NW. and SE.; desc. 435 ft. over steep NE. slope. Enter dense timber, bears NW. and SE.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 8 and 9.

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 3 $\frac{1}{2}$ ft. base to top, with brass cap mkd.

T10S R18W
 $\frac{1}{4}$ $\frac{S8}{S9}$
 1962

Desc. 135 ft. over NE. slope through medium timber.

Survey of a Portion of the Subdivision, T. 10 S., R. 18 W.

CHAINS

- 48.15 Wash, 20 lks. wide, 5 ft. deep, drains NE.
- 52.85 Head of Pole Creek, drains irregularly E.; asc. 285 ft. over steep SE. slope. Enter dense mahogany timber, bears E. and W.
- 68.40 Main ridge of Deep Creek Mountains, bears NE. and SW.; asc. 140 ft. along steep rocky W. slope.
- 80.00 Point for the cor. of secs. 4, 5, 8 and 9.
Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T10S R18W

S5	S4
S8	S9

 1962

Land, mountainous.
 Soil, rocky gravelly loam.
 Timber, medium dense pine and spruce S. portion; dense mahogany N. portion.
 Undergrowth, sagebrush, grass and scattered patches of dense oak brush.

- From the cor. of secs. 3, 4, 9 and 10.
- N. 89° 52' W., bet. secs. 4 and 9.
- Over mountainous land through dense mahogany and scattered pine timber.
- By triangulation, desc. about 50 ft. over SW. slope.
- 8.10 Small draw drains SE.; asc. about 100 ft. over NE. slope.
- 15.10 Spur, slopes SE.; desc. about 100 ft. over SW. slope.
- 25.10 Draw, drains SE.; asc. about 300 ft. over NE. slope.
- 40.06 Point for the ¼ sec. cor. of secs. 4 and 9. End triangulation.
Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T10S R18W

S4	
¼	S9

 1962

- Asc. 65 ft. over NE. slope.
- 43.40 Spur, slopes S., thence by triangulation, desc. about 50 ft. over SW. slope.
- 50.00 Head of draw, drains S.; asc. about 600 ft. over SE. slope.
- 78.15 Main ridge of Deep Creek Mountains, bears irregularly N. and S. End triangulation. Desc. 60 ft. over steep W. slope.
- 80.12 The cor. of secs. 4, 5, 8 and 9.

Survey of a Portion of the Subdivision T. 10 S., R. 18 W.

CHAINS

Land, mountainous.

Soil, rocky loam.

Timber, dense mahogany, scattered pine, pinon and juniper.

N. 0° 05' W., bet. secs. 4 and 5.

Over mountainous land through dense mahogany and scattered spruce and pine timber.

By triangulation; asc. about 50 ft. along steep W. slope.

1.00 Small spur, slopes W.; desc. about 200 ft. over ledgy NW. slope.

15.00 Draw, drains W.; asc. about 350 ft. over steep SW. slope.

23.45 Main ridge of Deep Creek Mountains, bears irregularly N. and S.; asc. 80 ft. over SE. slope. End triangulation.

31.15 Top of ascent, slopes E.; desc. 145 ft. over NE. slope.

38.00 Leave dense timber, bears E. and W.

40.00 Point for the $\frac{1}{2}$ sec. cor. of secs. 4 and 5.Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 10 ins. in the ground to bedrock and in a mound of stone, 4 $\frac{1}{2}$ ft. base to top, with brass cap mkd.

T10S R18W

 $\frac{1}{2}$

S5|S4

1962

Desc. 590 ft. over NE. slope.

66.20 Draw, drains E.; asc. 240 ft. over S. slope.

78.30 Ridge, bears E. and W.; desc. 35 ft. over N. slope.

80.78 The cor. of secs. 4, 5, 32 and 33, on the N. bdy. of the Tp., monumented with a 2 $\frac{1}{2}$ in. iron post, set, mkd. and witnessed as described in the 1962 field notes of the S. bdy., T. 9 S., R. 18 W.

Land, mountainous.

Soil, rocky loam.

Timber, dense mahogany and medium dense pine and spruce. Undergrowth, sagebrush, oak brush and grass.

From the standard cor. of secs. 31 and 32, on the S. bdy. of the Tp.

N. 0° 02' E., bet. secs. 31 and 32.

Over mountainous land through dense sagebrush and scattered timber.

Asc. 210 ft. over steep SW. slope.

13.70 Spur, slopes W.; desc. 530 ft. over steep, rocky N. slope; enter dense pine and spruce timber.

28.00 Leave dense timber, enter scattered pine, spruce and timber, bears E. and W.; desc. 140 ft. over N. slope.

Survey of a Portion of the Subdivision, T. 10 S., R. 18 W.

CHAINS 35.00	Bottom of canyon, drains W.; asc. 90 ft. over SW. slope. Enter scattered patches of dense mahogany.
40.00	Point for the $\frac{1}{2}$ sec. cor. of secs. 31 and 32. Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 15 ins. in the ground to bedrock and in a mound of stone, 3 ft. base to top, with brass cap mkd. T10S R18W $\frac{1}{2}$ S31 S32 1962 Asc. 580 ft. over steep rocky SW. slope.
60.00	Leave timber, bears E. and W., enter dense sagebrush.
64.90	End triangulation; asc. 15 ft. over gentle SW. slope.
71.20	Spur, slopes NW.; desc. 110 ft. over NE. slope.
77.15	Enter dense aspen timber, bears NW. and SE.; desc. 80 ft. over NE. slope.
80.00	Point for the cor. of secs. 29, 30, 31 and 32. Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins. in the ground to bedrock and in a mound of stone, 3 ft. base to top, with brass cap mkd. T10S R18W S30 S29 S31 S32 1962 from which An aspen, 8 ins. diam., bears N. 31° E., 42 lks. dist., mkd. T10S R18W S29 BT. An aspen, 10 ins. diam., bears S. $87^{\circ} 30'$ E., 31 lks. dist., mkd. T10S R18W S32 BT. Land, mountainous. Soil, rocky gravel. Timber, scattered to dense pine and spruce S. portion; scattered patches of dense aspen and mahogany timber E. portion. Undergrowth, dense sagebrush, grass and oak brush.
	From the cor. of secs. 28, 29, 32 and 33. N. $89^{\circ} 49'$ W., bet. secs. 29 and 32. Over mountainous land through scattered timber. Desc. 85 ft. along S. slope.
10.00	Head of draw, drains SE.; asc. 50 ft. over SE. slope.
19.40	Main ridge of Deep Creek Mountains, bears N. and S.; desc. 310 ft. over NW. slope. Enter dense pine and spruce timber.
29.90	Draw, drains N.; asc. 60 ft. along N. slope.
40.00	Point for the $\frac{1}{2}$ sec. cor. of secs. 29 and 32.

Survey of a Portion of the Subdivision, T. 10 S., R. 18 W.

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 5 ins. in the ground to bedrock, and in a mound of stone, 5 ft. to top, with brass cap mkd.

T10S R18W
 $\frac{1}{4}$ S29
 S32
 1962

Asc. 30 ft. along N. slope.

42.10 Rocky spur, slopes sharply N., thence by triangulation, desc. about 400 ft. over broken NW. slope.

60.00 Draw, drains N.; asc. about 350 ft. over NE. slope. Enter dense aspen timber.

79.90 End of triangulation.

80.00 The cor. of secs. 29, 30, 31 and 32.

Land, mountainous.
 Soil, rocky gravelly loam.
 Timber, scattered to dense pine and spruce E. portion; dense aspen W. portion.
 Undergrowth, sagebrush and grass.

West bet. secs. 30 and 31.

Over mountainous land through dense aspen timber.

Asc. 50 ft. over NE. slope.

1.00 Leave timber, bears NW. and SE.; enter dense sagebrush and june grass.

4.90 Spur, slopes N.; desc. 205 ft. over W. slope.

14.50 Spur, slopes N. 85° W.; desc. 300 ft. along S. slope.

25.80 Enter scattered mahogany, bears N. and S.; desc. 70 ft. along S. slope.

32.57 Slope changes; desc. 185 ft. over SW. slope.

40.00 Point for the ¼ sec. cor. of secs. 30 and 31.

Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground to bedrock, and in a mound of stone, 3½ ft. base to top, with brass cap mkd.

T10S R18W
 $\frac{1}{4}$ S30
 S31
 1962

Desc. 710 ft. over SW. slope.

67.90 Leave timber, bears NW. and SE., enter dense june grass.

78.37 The cor. of secs. 25, 30, 31 and 36, on the W. bdy. of the Tp.

Land, mountainous.
 Soil, rocky gravel.
 Timber, scattered mahogany.
 Undergrowth, sagebrush and june grass.

Survey of a Portion of the Subdivision, T. 10 S., R. 18 W.

CHAINS From the cor. of secs. 29, 30, 31 and 32.

N. 0° 02' E., bet. secs. 29 and 30.

Over mountainous land through dense aspen timber.

Desc. 200 ft. over NE. slope.

11.00 Point of spur, slopes E.; desc. 850 ft. over steep NE. slope. Leave aspen timber, enter dense pine, spruce, and mahogany timber.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 29 and 30.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T10S R18W

$\frac{1}{4}$
S30 | S29
1962

Thence by triangulation, desc. about 250 ft. over NE. slope.

42.00 Draw, drains NW.; desc. about 200 ft. along W. slope.

48.00 Small spur, slopes NW.; desc. about 100 ft. over NE. slope.

59.00 Bottom of Rock Spring Canyon, drains NW.; asc. about 500 ft. over SW. slope.

77.80 End triangulation.

80.00 Point for the cor. of secs. 19, 20, 29 and 30.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 8 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T10S R18W

S19 | S20
S30 | S29
1962

Land, mountainous.

Soil, rocky gravel.

Timber, dense aspen S. portion; dense pine, spruce, pinon, juniper, and mahogany N. portion.

Undergrowth, sagebrush, grass and buck brush.

From the cor. of secs. 20, 21, 28 and 29.

N. 89° 48' W., bet. secs. 20 and 29.

Over steep, mountainous land through scattered timber.

Desc. 835 ft. over steep W. slope.

23.60 Wash, 20 lks. wide, 5 ft. deep, drains NW., asc. 30 ft. over NE. slope.

27.20 Point of spur, slopes N.; desc. 390 ft. over NW. slope.

39.97 Point for the $\frac{1}{4}$ sec. cor. of secs. 20 and 29.

Survey of a Portion of the Subdivision, T. 10 S., R. 18 W.

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins. in the ground to bedrock and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T10S R18W

$$\frac{1}{4} \frac{S20}{S29}$$

1962

Desc. 90 ft. over NW. slope.

43.30 Draw, drains NW.; asc. 435 ft. over steep, rocky NE. slope.

62.00 Spur, slopes N. and W., from S.; desc. 185 ft. along N. slope.

74.00 Spur, slopes N. 85° W.; desc. 10 ft. along S. slope.

76.50 Slope changes, desc. 95 ft. over SW. slope.

79.94 The cor. of secs. 19, 20, 29 and 30.

Land, mountainous.
Soil, rocky loam.
Timber, scattered mahogany, pinon, and juniper.
Undergrowth, sagebrush, grass and buck brush.

West, bet. secs. 19 and 30.

Over mountainous land through dense mahogany, pine, pinon and juniper timber.

By triangulation, desc. about 800 ft. over rocky SW. slope.

20.00 Draw, drains NW.; asc. about 150 ft. over NE. slope.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 19 and 30. End triangulation.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 15 ins. in the ground to bedrock and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T10S R18W

$$\frac{1}{4} \frac{S19}{S30}$$

1962

Asc. 45 ft. over NE. slope.

41.60 Small spur, slopes N., thence by triangulation; desc. about 20 ft. over NW. slope.

42.50 Small draw, drains N.; asc. about 70 ft. over NE. slope.

43.10 Spur, slopes N.; desc. about 50 ft. over NW. slope.

45.00 Draw, drains NE.; asc. about 300 ft. over NE. slope.

69.70 Spur, slopes N. 85° W. End triangulation. Leave dense timber, enter dense sagebrush and scattered timber, bears S. and NW. Desc. 220 ft. over SW. slope.

75.55 Bladed dirt road, bears NW. and SE.

47

Survey of a Portion of the Subdivision, T. 10 S., R. 18 W.

CHAINS

78.63 Intersect the W. bdy. of the Tp. Point for the closing cor. of secs. 19 and 30.

At point of intersection

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 8 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T10S
R19W R18W
S25 | S19 C
 | S30 C
 1962

From this cor., the cor. of secs. 24 and 25, T. 10 S., R. 19 W., bears N. $0^{\circ} 10' W.$, 86 lks. dist., hereinbefore described.

Land, mountainous.

Soil, rocky gravelly loam.

Timber, dense mahogany, pine, pinon and juniper E. portion; scattered W. portion.

Undergrowth, sagebrush, grass and buck brush.

Point for the W. $\frac{1}{4}$ sec. cor. of sec. 30 at mid point bet. the cor. of secs. 25, 30, 31 and 36, and the closing cor. of secs. 19 and 30.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins. in the ground to bedrock and in a mound of stone, $3\frac{1}{2}$ ft. base to top, with brass cap mkd.

T10S
R19W R18W
 $\frac{1}{4}$
 | S30
 1962

From this cor., the E. $\frac{1}{4}$ sec. cor. of sec. 25, T. 10 S., R. 19 W., bears N. $0^{\circ} 10' W.$, 43 lks. dist., hereinbefore described.

From the cor. of secs. 19, 20, 29 and 30.

N. $0^{\circ} 02' E.$, bet. secs. 19 and 20.

Over mountainous land through dense mahogany, pinon, pine, and juniper timber.

Asc. 5 ft. over SW. slope.

2.20 Spur, slopes N. $70^{\circ} W.$; desc. 575 ft. over NW. slope.

18.90 Draw, drains NW.; desc. 165 ft. over NW. slope.

28.90 Fork of Rock Spring Canyon, with unimproved road in bottom, drains W.; asc. 340 ft. over S. slope.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 19 and 20.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 12 ins. in the ground to bedrock and in a mound of stone, 3 ft. base to top, with brass cap mkd.

Survey of a Portion of the Subdivision, T. 10 S., R. 18 W.

CHAINS

T10S R18W

$$\frac{1}{4}$$

S19	S20
1962	

Asc. 160 ft. over S. slope.

52.10 Spur, slopes W.; desc. 600 ft. over NE. slope.

75.90 Wash, drains NW.; asc. 10 ft. over SW. slope.

80.00 Point for the cor. of secs. 17, 18, 19 and 20.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 14 ins. in the ground to bedrock and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T10S R18W

S18	S17
S19	S20
1962	

from which

A pinon, 12 ins. diam., bears N. $49^{\circ} 45'$ W., 41 lks. dist., mkd. T10S R18W S18 BT.

A juniper, 14 ins. diam., bears S. $35^{\circ} 30'$ W., 13 lks. dist., mkd. T10S R18W S19 BT.

Land, mountainous.

Soil, rocky loam.

Timber, dense mahogany, pinon, juniper and pine.

Undergrowth, buck brush, oak brush and grass.

From the cor. of secs. 16, 17, 20 and 21.

N. $89^{\circ} 52'$ W., bet. secs. 17 and 20.

Over mountainous land through dense pine and spruce timber.

By triangulation; desc. about 500 ft. over steep W. slope.

30.00 Draw, drains NW.; asc. about 300 ft. over steep NE. slope.

39.00 End triangulation.

39.96 Point for the $\frac{1}{4}$ sec. cor. of secs. 17 and 20.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 12 ins. in the ground to bedrock and in a mound of stone, $3\frac{1}{2}$ ft. base to top, with brass cap mkd.

T10S R18W

S17	
$\frac{1}{4}$ S20	
1962	

41.00 Spur, slopes N. By triangulation, desc. about 240 ft. along N. slope.

48.40 Spur, slopes N. 85° W.; desc. about 550 ft. over SW. slope.

65.00 Draw, drains NW. about 10.00 chs. thence SW.; asc. about 50 ft. over NE. slope.

79.90 Small spur, slopes NW. End triangulation.

79.92 The cor. of secs. 17, 18, 19 and 20.

Survey of a Portion of the Subdivision, T. 10 S., R. 18 W.

CHAINS

Land, mountainous.
Soil, rocky loam.
Timber, dense pine and spruce E. portion; dense mahogany,
pinon and juniper W. portion.
Undergrowth, sagebrush, oak brush and grass.

West, bet. secs. 18 and 19.

Over mountainous land through dense mahogany, pinon and
juniper timber.

By triangulation, desc. about 50 ft. over W. slope.

- 3.00 Draw, drains NW.; asc. about 30 ft. over NE. slope.
- 6.00 Small spur, slopes NW. about 4.00 chs. to end; desc. about
50 ft. over NW. slope.
- 18.00 Draw, drains SW.; asc. about 100 ft. over SE. slope.
- 40.00 Point for the $\frac{1}{2}$ sec. cor. of secs. 18 and 19. End tri-
angulation.
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 12 ins. in
the ground to bedrock and in a mound of stone, 3 ft. base
to top, with brass cap mkd.

T10S R18W
 S18
 $\frac{1}{2}$ — S19
 1962

Asc. 25 ft. along S. slope.

- 48.30 Spur, slopes SW.; desc. 415 ft. over NW. slope.
- 68.00 Draw, drains N.; asc. 20 ft. over NE. slope.
- 71.40 Small spur, slopes N.; desc. 135 ft. over NW. slope.
- 78.09 Intersect the W. bdy. of the Tp. Point for the closing
cor. of secs. 18 and 19.

At point of intersection

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 15 ins. in
the ground to bedrock and in a mound of stone, 3 ft. base
to top, with brass cap mkd.

T10S
R19W R18W
S24 | S18 C
 | S19 C
 1962

from this cor., the cor. of secs. 13 and 24, T. 10 S., R.
19 W., bears N. $0^{\circ} 21'$ E., 72 lks. dist., hereinbefore
described.

Land, mountainous.
Soil, rocky loam.
Timber, dense pinon, juniper, scattered mahogany.
Undergrowth, sagebrush, buck brush and grass.

Survey of a Portion of the Subdivision, T. 10 S., R. 18 W.

CHAINS

Point for the W. $\frac{1}{4}$ sec. cor. of sec. 19 and mid point bet. the closing cor. of secs. 19 and 30, and the closing cor. of secs. 18 and 19.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., on solid rock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T10S
R19W R18W
 $\frac{1}{4}$
|S19
1962

From this cor., the E. $\frac{1}{4}$ sec. cor. of sec. 24, T. 10 S., R. 19 W., bears N. $0^{\circ} 21'$ E., 79 lks. dist., hereinbefore described.

From the cor. of secs. 17, 18, 19 and 20.

N. $0^{\circ} 02'$ E., bet. secs. 17 and 18.

Over mountainous land through dense pinon, juniper, mahogany, and pine timber.

By triangulation; desc. about 80 ft. over NE. slope.

- 3.00 Bottom of canyon, drains irregularly W.; asc. about 300 ft. over S. slope.
- 25.00 Spur, slopes NW.; desc. about 200 ft. over NE. slope.
- 40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 17 and 18. End triangulation.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 8 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T10S R18W
 $\frac{1}{4}$
S18|S17
1962

Desc. 30 ft. over NE. slope.

- 45.60 Draw, drains W.; asc. 250 ft. over S. slope.
- 56.70 Spur, slopes W.; desc. 400 ft. over NW. slope.
- 77.60 Canyon, drains SW.; asc. 70 ft. over SE. slope.
- 80.00 Point for the cor. of secs. 7, 8, 17 and 18.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 7 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T10S R18W
S7|S8
S18|S17
1962

Land, mountainous.

Soil, rocky loam.

Timber, dense pinon, juniper, pine, and mahogany.

Undergrowth, sagebrush, oak brush and grass.

Survey of a Portion of the Subdivision, T. 10 S., R. 18 W.

CHAINS

From the cor. of secs. 8, 9, 16 and 17.

N. 89° 49' W., bet. secs. 8 and 17.

Over mountainous land through scattered timber.

Desc. 1,010 ft. over steep W. slope.

30.50 Slope changes; desc. 285 ft. over SW. slope.

40.01 Point for the ¼ sec. cor. of secs. 8 and 17.

Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground to bedrock, and in a mound of stone, 3½ ft. base to top, with brass cap mkd.

T10S R18W
 $\frac{S8}{\frac{1}{4} S17}$
 1962

Desc. 145 ft. over SW. slope.

44.00 Small draw, drains NW.; desc. 360 ft. over NW. slope.

60.00 Draw, drains NW.; asc. 10 ft. over NE. slope.

62.50 Top of ascent, slopes N.; desc. 225 ft. over NW. slope. Enter dense timber.

73.50 Canyon, drains SW.; asc. 60 ft. over SE. slope.

74.80 Jeep trail, bears NE. and SW.

80.02 The cor. of secs. 7, 8, 17 and 18.

Land, mountainous.
 Soil, rocky gravel and loam.
 Timber, scattered mahogany, pinon, and juniper E. portion; dense W. portion.
 Undergrowth, sagebrush, buck brush, and grass.

West, bet. secs. 7 and 18.

Over mountainous land through medium dense timber.

Asc. 100 ft. over SE. slope.

3.00 Spur, slopes S., thence by triangulation; desc. about 100 ft. over SW. slope.

10.00 Head of draw, drains S.; asc. about 100 ft. over SE. slope.

15.00 Spur, slopes SW.; end triangulation. Desc. 370 ft. over SW. slope.

40.00 Point for the ¼ sec. cor. of secs. 7 and 18.

Set an iron post, 30 ins. long, 2½ ins. diam., 15 ins. in the ground to bedrock and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T10S R18W
 $\frac{S7}{\frac{1}{4} S8}$
 1962

Desc. 120 ft. over SW. slope.

Survey of a Portion of the Subdivision T. 10 S., R. 19 W.

CHAINS

- 47.00 Small draw, drains S.; asc. 25 ft. over E. slope.
 50.90 Top of small knoll; desc. 300 ft. over NW. slope.
 69.30 Unimproved road, bears NE. and SW.
 74.80 Draw, drains SW.; asc. 55 ft. over SE. slope.
 77.68 Intersect the W. bdy. of the Tp. Point for the closing cor. of secs. 7 and 18.

At point of intersection

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 4 ins. in the ground to bedrock and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T10S
 R19W R18W
 S13 | $\frac{S7}{S18}$ C
 1962

From this cor., the cor. of secs. 12 and 13, T. 10 S., R. 19 W., bears N. $0^{\circ} 17' E.$, 1.22 chs. dist., hereinbefore described.

Land, mountainous.
 Soil, rocky loam.
 Timber, medium dense mahogany, pinon and juniper.
 Undergrowth, sagebrush, buck brush and grass.

Point for the W. $\frac{1}{4}$ sec. cor. of sec. 18 at mid point bet. the closing cor. of secs. 18 and 19, and the closing cor. of secs. 7 and 18.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, $3\frac{1}{2}$ ft. base to top, with brass cap mkd.

T10S
 R19W R18W
 $\frac{1}{4}$
 | S18
 1962

From this cor., the E. $\frac{1}{4}$ sec. cor. of sec. 13, T. 10 S., R. 19 W., bears N. $0^{\circ} 17' E.$, 97 lks. dist., hereinbefore described.

From the cor. of secs. 7, 8, 17 and 18.

N. $0^{\circ} 02' E.$, bet. secs. 7 and 8.

Over mountainous land through dense timber.

Asc. 135 ft. over SE. slope.

- 4.60 Spur, slopes SW., thence by triangulation; desc. 120 ft. over NW. slope.
 12.80 Draw, drains W.; asc. 120 ft. over S. slope.
 18.00 Small spur, slopes W.; desc. about 100 ft. over N. slope.
 24.00 Draw, drains W.; asc. about 250 ft. over S. slope.

Survey of a Portion of the Subdivision, T. 10 S., R. 18 W.

CHAINS

38.20 Spur, slopes SW. End triangulation. Desc. 10 ft. along W. slope.

40.00 Point for the 1/2 sec. cor. of secs. 7 and 8.

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 3 1/2 ft. base to top, with brass cap mkd.

T10S R18W
 1/2
 S7 | S8
 1962

Desc. 625 ft. over ledgy NW. slope.

57.90 Wash, drains NW.; desc. 50 ft. over NW. slope.

60.60 Small spur, slopes NW.; desc. 100 ft. over NW. slope.

68.00 Draw, drains W.; asc. 400 ft. over S. slope.

80.00 Point for the cor. of secs. 5, 6, 7 and 8.

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 8 ins. in the ground to bedrock, and in a mound of stone, 3 1/2 ft. base to top, with brass cap mkd.

T10S R18W
 S6 | S5
 S7 | S8
 1962

Land, mountainous.
 Soil, rocky loam.
 Timber, dense pinon, juniper, pine and mahogany.
 Undergrowth, sagebrush, buck brush and grass.

From the cor. of secs. 4, 5, 8 and 9.

N. 89° 47' W., bet. secs. 5 and 8.

Over mountainous land through dense mahogany timber.

By triangulation, desc. about 800 ft. over steep W. changing to NW. slope.

39.40 End triangulation; desc. 15 ft. over NW. slope.

40.06 Point for the 1/2 sec. cor. of secs. 5 and 8.

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 12 ins. in the ground to bedrock and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T10S R18W
 S5
 1/2 ———
 S8
 1962

Thence by triangulation; desc. about 450 ft. over NW. slope.

65.10 Draw, drains SW.; asc. about 300 ft. over SE. slope.

75.30 Point of rocky spur, slopes S. End triangulation, thence along S. slope.

Survey of a Portion of the Subdivision, T. 10 S., R. 18 W.

CHAINS

80.12 The cor. of secs. 5, 6, 7 and 8.

Land, mountainous.

Soil, rocky loam.

Timber, dense mahogany, pine, pinon and juniper.

Undergrowth, sagebrush, buck brush, oak brush and grass.

West, bet. secs. 6 and 7.

Over mountainous land through dense timber.

By triangulation; desc. about 20 ft. along S. slope.

4.00 Spur, slopes irregularly W.; desc. about 100 ft. along N. slope.

13.00 Bottom of descent, slopes N.; asc. about 60 ft. over NE. slope.

20.00 Same spur, slopes NW. End triangulation. Desc. 200 ft. over SW. slope.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 6 and 7.Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins. in the ground to bedrock and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T10S R18W

S6
—
$\frac{1}{4}$ S7
1962

Desc. 35 ft. along S. slope.

45.90 Slope changes, desc. 500 ft. over SW. slope.

77.53 Intersect the W. bdy. of the Tp. Point for the closing cor. of secs. 6 and 7.

At point of intersection

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T10S
R19W R18W
S12 S6 C
S7 C
1962

From this cor., the cor. of secs. 1 and 12, T. 10 S., R. 19 W., bears N. $0^{\circ} 05' E.$, 1.02 chs. dist., hereinbefore described.

Land, mountainous.

Soil, rocky loam.

Timber, dense mahogany, pinon and juniper.

Undergrowth, sagebrush, buck brush and grass.

Point for the W. $\frac{1}{4}$ sec. cor. of sec. 7 at mid point bet. the closing cor. of secs. 7 and 18, and the closing cor. of secs. 6 and 7.

Survey of a Portion of the Subdivision, T. 10 S., R. 18 W.

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 3 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T10S
R19W R18W
 $\frac{1}{2}$
| S7
1962

From this cor., the E. $\frac{1}{2}$ sec. cor. of sec. 12, T. 10 S., R. 19 W., bears N. $0^{\circ} 05'$ E., 1.12 chs. dist., hereinbefore described.

Point for the W. $\frac{1}{2}$ sec. cor. of sec. 6, 40.00 chs. northing from the closing cor. of secs. 6 and 7.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 15 ins. in the ground to bedrock and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T10S
R19W R18W
 $\frac{1}{2}$
| S6
1962

From this cor., the E. $\frac{1}{2}$ sec. cor. of sec. 1, T. 10 S., R. 19 W., bears N. $0^{\circ} 15'$ E., 89 lks. dist., hereinbefore described.

From the cor. of secs. 5, 6, 7 and 8.

N. $0^{\circ} 03'$ W., bet. secs. 5 and 6.

Over mountainous land through dense timber.

Asc. 10 ft. over S. slope.

- 1.10 Spur, slopes W., thence by triangulation; desc. about 350 ft. over NE. slope.
- 12.00 Draw, drains W.; asc. about 450 ft. over rocky SW. slope.
- 25.00 Rocky spur, slopes W., end triangulation. Desc. 400 ft. over broken, ledgy NW. slope.
- 35.00 Draw, drains W.; asc. 150 ft. over rocky SW. slope.
- 40.00 Point for the $\frac{1}{2}$ sec. cor. of secs. 5 and 6.
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., on solid stone, and in a mound of stone, 4 ft. base to top, with brass cap mkd.
- T10S R18W
 $\frac{1}{2}$
S6 | S5
1962
- Asc. 180 ft. over SW. slope.
- 46.70 Spur, slopes W.; desc. 5 ft. along W. slope.
- 49.20 Draw, drains SW., asc. 75 ft. over S. slope.

Survey of a Portion of the Subdivision, T. 10 S., R. 18 W.

CHAINS

- 55.30 pur, slopes W.; desc. 300 ft. over N. slope.
- 65.40 raw, drains W.; asc. 85 ft. over S. slope.
- 69.70 Spur, slopes W.; desc. 70 ft. over N. slope.
- 72.20 Slope changes; desc. 145 ft. over NE. slope.
- 77.80 ash, drains NW.; asc. 10 ft. over SW. slope.
- 80.60 he cor. of secs. 5, 6, 31 and 32, on the N. bdy. of the p., monumented with a 2½ in. iron post, set, mkd. and witnessed as described in the 1962 field notes of the S. dy., T. 9 S., R. 18 W.

nd, mountainous.

Soil, rocky loam.

timber, dense pinon, juniper and mahogany.
undergrowth, sagebrush and grass.

General Description

ownship 10 South, Range 18 West, is located in the Deep Creek Mountains about 6 miles southeast of Ibapah, Utah. It is rough, steep, mountainous land, covered with dense mahogany and oakbrush on the south slopes, and dense pine and spruce and aspen timber on the north slopes of the higher slopes. The lower slopes are covered with dense pinon, juniper and mahogany timber, with dense sagebrush and grass undergrowth, and is fair for grazing. The soil is mostly rocky loam. The main ridge of the Deep Creek Mountain Range extends north and south through the western portion of the township. The east portion is drained in an easterly direction by numerous canyons and draws, and the western portion is drained in a westerly direction by numerous canyons and draws. The elevation varies from 5,200 ft. in the northeast cor., to 10,600 ft. above sea level on Rock Springs Peak, in section 32. There are numerous unimproved roads following the canyons and draws to the base of the mountains. There are three small streams of water in the township. One in Rock Springs Canyon, in section 36; a canyon in sections 31 and 32, and in a fork of Basin Creek, located in section 33. There are two old mines located in the township. One in section 26, and one in section 29. There is no suitable land in the township for cultivation or farming.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS

NAMES	CAPACITY
Rex J. Edwards	Transitman
Ferrel D. Reynolds	Transitman
Douglas L. McInelly	Chairman
Max Asay	Chairman
Paul Emil Mahler	Chairman
Gail E. Reynolds	Chairman
Marcus Calvin Gleave	Cornerman
Frank L. Heath	Cornerman
Robert L. Gleave	Flagman
Jeffrey M. Campbell	Flagman

CERTIFICATE OF SURVEY

I, **Craig P. Sylvester**, HEREBY CERTIFY upon honor that,
 in pursuance of special instructions bearing date of the 19 day of December, 1961,
 I have supervised the dependent resurvey of West boundary of Township 10
 South, Range 17 West, East boundary of Township 10 South, Range
 19 West and the South Boundary (Second Standard Parallel South),
 and the survey of a portion of the subdivisional lines of Town-
 ship 10 South, Range 18 West
 of the Salt Lake Meridian, in the State of Utah, which
 are represented in the foregoing field notes as having been executed by me and under my direction;
 and that said survey has been made in strict conformity with said special instructions, the Manual
 of Instructions for the Survey of the Public Lands of the United States, and in specific manner
 described in the foregoing field notes.

March 5, 1963

(Date)

Craig P. Sylvester
 (Cadastral Surveyor)

Craig P. Sylvester

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

SUBMITTED FOR APPROVAL

Date FEB 13 1964
 JUN 5 1969

BUREAU OF LAND MANAGEMENT,
 Washington, D. C.

The foregoing field notes of the dependent resurvey of the West Boundary of Township
 10 South, Range 17 West, East Boundary of Township 10 South, Range 19 West
 and the South Boundary (Second Standard Parallel South), and the survey of
 a portion of the subdivisional lines of Township 10 South, Range 18 West

executed by Glen B. Hatch and Fred R. Chappell, Cadastral Surveyors, and LaV
 Griffin, survey aid, under the supervision of Craig P. Sylvester, Cadastral
 Surveyor, having been critically examined and found correct, are hereby approved.

MAR 10 1969

(Date)

Thomas A. Tillman
 (Chief, Division of Engineering)

Acting Chief, Division of Cadastral Survey

CERTIFICATE OF TRANSCRIPT

~~I CERTIFY That the foregoing transcript of the field notes of the above described surveys in~~

~~, is a true copy of the original field notes.~~

~~(Date)~~

~~(Chief, Division of Engineering)~~

Blank

Page

Blank

Page

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

RECEIVED
SURVEY & LAND OFFICE
SALT LAKE CITY, UTAH 129

ORIGINAL

FIELD NOTES

JAN 29 PM 1:36

OF THE
SURVEY

DEPT. OF INTERIOR
BUREAU OF LAND MGMT.

OF

A PORTION OF THE SUBDIVISIONAL LINES

OF

TOWNSHIP 37 SOUTH, RANGE 17 EAST

Of the SALT LAKE Meridian,

in the State of UTAH

EXECUTED BY

CRAIG P. SYLVESTER

SUPERVISORY CADASTRAL SURVEYOR

Under special instructions dated APRIL 15, 19 68, which provided for the surveys

included under Group Number 505, approved APRIL 23, 1968,

and assignment instructions dated JUNE 20, 19 68.

Survey commenced AUGUST 19, 19 68

Survey completed SEPTEMBER 19, 19 68

INDEX DIAGRAM

Township 37 SOUTH, Range 17 EAST

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
24	23		13	13	5
19	22 20	17 21	22	9 23	3 24
21	20	16	11	10	3
30	29	19 28	15 27	9 26	1 25
18		14	8	7	
31	32	33	34	35	36

Survey of a Portion of the Subdivision,
T. 37 S., R. 17 E.

CHAINS

The West Boundary was surveyed by C. F. Moore and R. C. Yundt in 1929. The North Boundary was surveyed by R. C. Yundt in 1931. The South Boundary was surveyed by A. D. Ferron in 1884, and independently resurveyed by Boyd S. Owens, Craig P. Sylvester and Fred R. Chappell in 1957. The East Boundary and a portion of the subdivisional lines were surveyed by Boyd S. Owens, Dell Cazier and Craig P. Sylvester in 1957. The following field notes are those of the survey of a portion of the subdivisional lines of Township 37 South, Range 17 East.

The survey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions 1947, and Special Instructions dated April 15, 1968.

The direction of the lines of this survey were determined by reference to true meridians established on line by hour angle observations on Polaris and altitude observations on the sun. The lines were carried forward by sustained angulation being supplemented by other altitude observations on the sun taken throughout the progress of the survey.

The length of all lines were determined by chaining where accessible; line inaccessible were run by triangulation or traverse methods. Topography on lines run by traverse or triangulation methods are scaled from U.S.G.S. topographic sheet "Natural Bridges, Utah."

The geographic position of the southeast corner of the township is at Latitude 37° 31' 10.74" N. and Longitude 109° 58' 58.39" W., as computed from section line ties to U.S.G.S. triangulation stations in the area in 1957.

The magnetic declination was read at several stations in the township and the average of those readings was found to be 15° East.

Survey of a Portion of the Subdivision,
T. 37 S., R. 17 E.

Beginning at the cor. of secs. 25, 26, 35 and 36, monumented with an iron post, 2½ ins. diam., with brass cap mkd.

T37S R17E

S26 | S25
S35 | S36

1957

North, bet. secs. 25 and 26.

Over rolling bench land through dense timber; asc. 95 ft. over SE. slope.

Survey of a Portion of the Subdivision,
T. 37 S., R. 17 E.

BASIS

- 21.00 Trail road, on spur, bears N. 45° E. and S. 30° W.;
thence by triangulation; desc. about 20 ft. over NW.
slope.
- 27.00 Draw, drains W.; asc. about 25 ft. over SW. slope.
- 36.00 Spur, slopes W.; desc. about 20 ft. over NW. slope.
End triangulation.
- 40.00 Point for the $\frac{1}{2}$ sec. cor. of secs. 25 and 26.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T37S R17E
 $\frac{1}{2}$
S26 | S25
1968

From which,

A juniper, 14 ins. diam., bears S. 40° E., 15 lks.
dist., mkd. $\frac{1}{2}$ S25 BT.

A pinon, 7 ins. diam., bears S. 65° W., 23 lks.
dist., mkd. $\frac{1}{2}$ S26 BT.

By triangulation; desc. about 20 ft. over NW. slope.

- 46.00 Draw, drains W.; asc. about 30 ft. over SW. slope.
- 56.00 Spur, slopes W.; desc. about 60 ft. over NW. slope.
- 76.00 Draw, drains W.; asc. about 20 ft. over SW. slope.
- 80.00 Point for the cor. of secs. 23, 24, 25 and 26. End
triangulation.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., over a
(X) on solid sandstone, and in a mound of stone, 5 ft.
base to top, with brass cap mkd.

T37S R17E
S23 | S24
S26 | S25
1968

From which,

A juniper, 8 ins. diam., bears N. 30° E., 69 lks.
dist., mkd. S 24 BT.

A juniper, 12 ins. diam., bears S. 80° E., 76 lks.
dist., mkd. T37S R17E S25 BT.

A juniper, 26 ins. diam., bears S. 40° W., 105 lks.
dist., mkd. S 26 BT.

Survey of a Portion of the Subdivision,
T. 37 S., R. 17 E.

CHAINS

A pinon, 10 ins. diam., bears N. 40° W., 79 lks.
dist., mkd. T37S R17E S23 BT.

Land, rolling benchland.
Soil, sandy.
Timber, dense pinon and juniper.
Undergrowth, sagebrush and grass.

From the cor. of secs. 19, 24, 25 and 30, on the E. bdy.
of the Tp., monumented with an iron post, 2½ ins. diam.,
with brass cap mkd.

T37S
R17E R18E

S24 | S19
S25 | S30

1957

N. 89° 51' W., bet. secs. 24 and 25.

Over rolling benchland through dense timber; asc. 65 ft.
over E. slope.

21.35 State Highway No. 95, bears N. 49° 35' W. and S. 49° 35'
E., on ridge; desc. 65 ft. over W. slope.

40.04 Point for the ¼ sec. cor. of secs. 24 and 25.

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins.
in the ground, with brass cap mkd.

T37S R17E

¼ — S24
S25

1968

From which,

A juniper, 10 ins. diam., bears S. 20° E., 8 lks.
dist., mkd. ¼ S25 BT.

A pinon, 12 ins. diam., bears N. 27° W., 38 lks.
dist., mkd. ¼ S24 BT.

Desc. 105 ft. over SW. slope.

80.08 The cor. of secs. 23, 24, 25 and 26.

Land, rolling and broken benchland.
Soil, sandy.
Timber, dense pinon and juniper.
Undergrowth, sagebrush and grass.

North, bet. secs. 23 and 24.

Survey of a Portion of the Subdivision,
T. 37 S. R. 17 E.

CHAINS

- Over broken benchland through dense timber; by triangulation; asc. about 40 ft. over SW. slope.
- 7.00 Spur, slopes W.; desc. about 20 ft. over NW. slope.
- 18.00 Draw, drains S. 60° W.; asc. about 20 ft. over SE. slope.
- 23.00 Spur, slopes S. 60° W.; desc. about 20 ft. over NW. slope.
- 28.00 Draw, drains S. 70° W.; asc. about 50 ft. over SW. slope.
- 40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 23 and 24; end triangulation.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T37S R17E

$\frac{1}{4}$
S23|S24

1968

From which,

A juniper, 10 ins. diam., bears S. 54° E., 72 lks. dist., mkd. $\frac{1}{4}$ S24 BT.

A juniper, 16 ins. diam., bears N. 74° W., 46 lks. dist., mkd. $\frac{1}{4}$ S23 BT.

Continue over broken land by triangulation; asc. about 20 ft. over SW. slope.

- 48.80 State Highway No. 95, on ridge, bears N. 54° 40' W. and S. 54° 40' E.; desc. about 150 ft. over NE. slope.
- 80.00 Point for the cor. of secs. 13, 14, 23 and 24; end triangulation.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., on solid sandstone, and in a mound of stone, $4\frac{1}{2}$ ft. base to top, with brass cap mkd.

T37S R17E

S14|S13
S23|S24

1968

From which,

A pinon, 11 ins. diam., bears N. 55° 45' E., 72 lks. dist., mkd. S 13 BT.

A pinon, 8 ins. diam., bears S. 70° 15' E., 35 lks. dist., mkd. S 24 BT.

Survey of a Portion of the Subdivision,
T. 37 S., R. 17 E.

CHAINS

A pinon, 8 ins. diam., bears S. 52° 15' W., 19 lks. dist., mkd. S23 BT.

A pinon, 6 ins. diam., bears N. 1° W., 33 lks. dist. mkd. S14 BT.

Land, broken benchland.
Soil, sandy, exposed sandstone.
Timber, dense pinon and juniper.
Undergrowth, sagebrush and grass.

From the cor. of secs. 13, 18, 19 and 24, on the E. bdy. of the Tp., monumented with an iron post, 2½ ins. diam., with brass cap mkd.

T37S
R17E R18E

S13 | S18
S24 | S19

1957

N. 89° 46' W., bet. secs. 13 and 24.

Over broken benchland through dense timber; desc. 40 ft. over NW. slope.

17.00 Draw, drains S. 50° W.; asc. 10 ft. over SE. slope.

25.00 Spur, slopes S.; desc. 25 ft. over SW. slope.

39.99 Point for the ¼ sec. cor. of secs. 13 and 24.

Set an iron post, 30 ins. long, 2½ ins. diam., over a (X) on solid sandstone, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T37S R17E

¼ S13
S24

1968

From which,

A pinon, 10 ins. diam., bears S. 52° E., 92 lks. dist., mkd. ¼ S24 BT.

A juniper, 16 ins. diam., bears N. 11° W., 64 lks. dist., mkd. ¼ S13 BT.

By triangulation; desc. about 150 ft. over broken SW. slope.

71.00 Armstrong Canyon, drains irregularly N. 65° W.; asc. about 80 ft. over NE. slope.

Survey of a Portion of the Subdivision,
T. 37 S., R. 17 E.

CHAINS

79.98 The cor. of secs. 13, 14, 23 and 24; end triangulation.

Land, broken benchland.
Soil, sandy, exposed sandstone.
Timber, dense pinon and juniper.
Undergrowth, sagebrush and grass.

From the cor. of secs. 2, 3, 34 and 35, on the S. bdy.
of the Tp., monumented with an iron post, 2½ ins. diam.,
with brass cap mkd.

T37S R17E

S34|S35
S3|S2

T38S R17E

1957

North, bet. secs. 34 and 35.

Over broken land through dense timber. By triangulation;
desc. about 80 ft. over broken NW. slope.

20.00 head of draw, drains N. 65° W.; thence along W. slope.

40.00 Point for the ¼ sec. cor. of secs. 34 and 35; end tri-
angulation.

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins.
in the ground to bedrock, and in a mound of stone, 3½ ft.
base to top, with brass cap mkd.

T37S R17E

¼
S34|S35

1968

From which,

A pinon, 9 ins. diam., bears S. 47° E., 37 lks.
dist., mkd. ¼ S35 BT.

A pinon, 8 ins. diam., bears S. 68° W., 46 lks.
dist., mkd. ¼ S34 BT.

Continue by triangulation; desc. about 80 ft. over
broken NW. slope.

60.00 Dripping Canyon, drains S. 35° W.; asc. about 80 ft.
over broken SE. slope.

80.00 Point for the cor. of secs. 26, 27, 34 and 35; end
triangulation.

Survey of a Portion of the Subdivision,
T. 37 S., R. 17 E.

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 3 ins. in the ground to bedrock, and in a mound of stone, $3\frac{1}{2}$ ft. base to top, with brass cap mkd.

T37S R17E

S27	S26
S34	S35

1968

From which,

A pinon, 9 ins. diam., bears N. 30° E., 67 lks. dist., mkd. T37S R17E S26 BT.

A pinon, 10 ins. diam., bears S. 26° E., 28 lks. dist., mkd. T37S R17E S35 BT.

A pinon, 14 ins. diam., bears S. 46° W., 19 lks. dist., mkd. T37S R17E S34 BT.

A pinon, 9 ins. diam., bears N. 12° W., 68 lks. dist., mkd. T37S R17E S27 BT.

Land, broken and rolling benchland.

Soil, sandy.

Timber, dense pinon and juniper.

Undergrowth, sagebrush and grass.

From the cor. of secs. 25, 26, 35 and 36:

S. $89^\circ 57'$ W., bet. secs. 26 and 35.

Over broken land through dense timber; asc. 75 ft. over SE. slope.

13.50 Trail road, on spur, bears N. 25° E. and S. 25° W.; thence by triangulation; desc. about 160 ft. over broken W. slope.

40.08 Point for the $\frac{1}{2}$ sec. cor. of secs. 26 and 35; end triangulation.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins. in the ground to bedrock, and in a mound of stone, $3\frac{1}{2}$ ft. base to top, with brass cap mkd.

T37S R17E

$\frac{1}{2}$	S26	
	S35	

1968

From which,

A pinon, 6 ins. diam., bears N. 35° E., 80 lks. dist., mkd. $\frac{1}{2}$ S26 BT.

Survey of a Portion of the Subdivision,
T. 37 S., R. 17 E.

CHAINS

A pinon, 6 ins. diam., bears S. 8° W., 86 lks.
dist., mkd. ½ S35 BT.

Continue by triangulation; desc. about 120 ft. over
broken SW. slope.

- 68.65 Dripping Canyon, drains S. 25° W.; asc. about 40 ft.
over SE. slope.
- 80.16 The cor. of secs. 26, 27, 34 and 35. End triangulation.

Land, broken benchland.
Soil, shallow sand.
Timber, dense pinon and juniper.
Undergrowth, sagebrush and grass.

N. 89° 56' W., bet. secs. 27 and 34.

Over rolling and broken benchland through dense timber.
By triangulation; asc. about 120 ft. over E. slope.

- 20.45 Low ridge, bears N. and S. End triangulation; desc. 50
ft. over W. slope.

- 40.04 Point for the ½ sec. cor. of secs. 27 and 34.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T37S R17E

½ $\frac{S27}{S34}$

1958

From which,

A pinon, 6 ins. diam., bears S. 8° E., 84 lks.
dist., mkd. ½ S34 BT.

A pinon, 8 ins. diam., bears N. 18° W., 47 lks.
dist., mkd. ½ S27 BT.

Thence by triangulation; desc. about 20 ft. over W.
slope.

- 43.10 Head of draw, drains S. 25° W.; thence along S. slope.
- 52.10 Spur, slopes S. 45° W.; desc. about 220 ft. over broken
NW. slope.
- 70.10 Cow Tank Canyon, drains irregularly S. 40° W.; asc.
about 100 ft. over broken SE. slope.
- 80.08 The cor. of secs. 27, 28, 33 and 34, monumented with an
iron post, 2½ ins. diam., with brass cap mkd.

T37S R17E

$\frac{S28}{S33} | \frac{S27}{S34}$

1957

Survey of a Portion of the Subdivision,
T. 37 S., R. 17 E.

CHAINS

End triangulation.

Land, broken and rolling benchland.
Soil, sandy.
Timber, dense pinon and juniper.
Undergrowth, sagebrush and grass.

From the cor. of secs. 26, 27, 34 and 35.

North, bet. secs. 26 and 27.

Over broken benchland through dense timber. By triangulation; asc. about 120 ft. over broken SE. slope.

26.00 Spur, slopes S. 30° E.; asc. about 20 ft. over SE. slope.

37.40 Spur, slopes S. 50° E. End triangulation; thence along E. slope.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 26 and 27.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T37S R17E

$\frac{1}{4}$
S27|S26

1968

From which,

A pinon, 8 ins. diam., bears N. 20° E., 3 lks. dist., mkd. $\frac{1}{4}$ S26 BT.

A pinon, 8 ins. diam., bears S. 55° W., 15 lks. dist., mkd. $\frac{1}{4}$ S27 BT.

Thence, by triangulation; desc. about 20 ft. over NE. slope.

48.00 Head of draw, drains S. 45° E.; asc. about 80 ft. over S. slope.

70.00 Spur, slopes S. 10° W. from N.; thence along spur.

80.00 Point for the cor. of secs. 22, 23, 26 and 27; end triangulation.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T37S R17E

S22|S23
S27|S26

1968

Survey of a Portion of the Subdivision,
T. 37 S., R. 17 E.

CHAINS

From which,

A pinon, 8 ins. diam., bears N. 22° 40' E., 55 lks. dist., mkd. T37S R17E S23 BT.

A juniper, 10 ins. diam., bears S. 2° 20' E., 49 lks. dist., mkd. T37S R17E S26 BT.

A juniper, 6 ins. diam., bears S. 54° W., 71 lks. dist., mkd. T37S R17E S27 BT.

A pinon, 10 ins. diam., bears N. 20° 40' W., 91 lks. dist., mkd. T37S R17E S22 BT.

Land, broken and rolling benchland.

Soil, sandy.

Timber, dense pinon and juniper.

Undergrowth, sagebrush and grass.

From the cor. of secs. 23, 24, 25 and 26.

S. 89° 55' W., bet. secs. 23 and 26.

Over broken and rolling benchland through dense timber; by triangulation, desc. about 100 ft. over SW. slope.

37.00 Dripping Canyon, drains S. 10° W.; asc. about 20 ft. over gentle SE. slope.

39.95 Point for the $\frac{1}{4}$ sec. cor. of secs. 23 and 26; end triangulation.

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T37S R17E

$\frac{1}{4}$ $\frac{S23}{S26}$

1968

From which,

A juniper, 12 ins. diam., bears N. 69° E., 39 lks. dist., mkd. $\frac{1}{4}$ S23 BT.

A juniper, 8 ins. diam., bears S. 36° W., 22 lks. dist., mkd. $\frac{1}{4}$ S26 BT.

By triangulation; asc. about 20 ft. over gentle SE. slope.

52.00 Spur, slopes S.; desc. about 20 ft. over SW. slope.

66.00 Head of draw, drains S. 30° E.; asc. about 25 ft. over SE. slope.

79.80 Top of ascent, bears N. and S.

Survey of a Portion of the Subdivision,
T. 37 S., R. 17 E.

CHAINS

79.92 The cor. of secs. 22, 23, 26 and 27; end triangulation.

Land, broken and rolling benchland.
Soil, sandy.
Timber, dense pinon and juniper.
Undergrowth, sagebrush and grass.

N. 89° 57' W., bet. secs. 22 and 27.

Over rolling benchland through dense timber. By triangulation; desc. about 80 ft. over general NW. slope.

39.99 Point for the $\frac{1}{2}$ sec. cor. of secs. 22 and 27; end triangulation.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins. in the ground, and in a collar of stone, with brass cap mkd.

T37S R17E

$\frac{1}{2}$ $\frac{S22}{S27}$

1968

From which,

A juniper, 8 ins. diam., bears S. 4° W., 40 lks. dist., mkd. $\frac{1}{2}$ S27 BT.

A juniper, 12 ins. diam., bears N. 60° 15' W., 33 lks. dist., mkd. $\frac{1}{2}$ S22 BT.

By triangulation; desc. about 60 ft. over NW. slope.

54.00 Cow Tank Canyon, drains S. 22° W.; asc. about 30 ft. over SE. slope.

61.00 Spur, slopes S.; desc. about 20 ft. over SW. slope.

65.00 Small draw, drains S.; asc. about 40 ft. over E. slope.

74.00 Top of ascent, bears N. and S. End triangulation; desc. over gentle W. slope.

79.98 The cor. of secs. 21, 22, 27 and 28, monumented with an iron post, $2\frac{1}{2}$ ins. diam., with brass cap mkd.

T37S R17E

$\frac{S21}{S23} | \frac{S22}{S27}$

1957

Land, broken and rolling benchland.
Soil, sandy.
Timber, dense pinon and juniper.
Undergrowth, sagebrush and grass.

From the cor. of secs. 22, 23, 26 and 27.

Survey of a Portion of the Subdivision,
T. 37 S., R. 17 E.

CHAINS

North, bet. secs. 22 and 23.

Over rolling benchland along general W. slope through dense timber.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 22 and 23.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T37S R17E

$\frac{1}{4}$
S22|S23

1968

From which,

A pinon, 12 ins. diam., bears S. 72° E., 12 lks. dist., mkd. $\frac{1}{4}$ S23 BT.

A juniper, 8 ins. diam., bears N. 32° W., 8 lks. dist., mkd. $\frac{1}{4}$ S22 BT.

Desc. 25 ft. over gently rolling NW. slope.

69.35 Gravel road, bears N. $52^{\circ} 20'$ E. and S. $52^{\circ} 20'$ W. to Halls Crossing.

76.40 State Highway No. 95, bears N. $85^{\circ} 30'$ E. and S. $85^{\circ} 30'$ W.

80.00 Point for the cor. of secs. 14, 15, 22 and 23.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T37S R17E

S15|S14
S22|S23

1968

From which,

A juniper, 8 ins. diam., bears N. $62^{\circ} 40'$ E., 50 lks. dist., mkd. T37S R17E S14 BT.

A juniper, 12 ins. diam., bears S. $43^{\circ} 20'$ E., 29 lks. dist., mkd. T37S R17E S23 BT.

A pinon, 6 ins. diam., bears S. 67° W., 40 lks. dist., mkd. T37S R17E S22 BT.

A pinon, 4 ins. diam., bears N. $35^{\circ} 30'$ W., 25 lks. dist., mkd. T37S R17E S15 BT.

Land, gently rolling benchland.

Soil, sandy.

Timber, dense pinon and juniper.

Undergrowth, sagebrush and grass.

Survey of a Portion of the Subdivision,
T. 37 S., R. 17 E.

CHAINS

From the cor. of secs. 13, 14, 23 and 24.

S. 89° 53' W., bet. secs. 14 and 23.

Over rolling benchland through dense timber. By triangulation; asc. about 80 ft. over NE. slope.

16.10 Ridge, bears N. 45° W. and S. 45° E. End triangulation; desc. 30 ft. over gentle NW. slope.

39.98 Point for the $\frac{1}{2}$ sec. cor. of secs. 14 and 23.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T37S R17E

$\frac{1}{2}$ $\frac{S14}{S23}$

1968

From which,

A juniper, 18 ins. diam., bears S. 3° W., 18 lks. dist., mkd. $\frac{1}{2}$ S23 BT.

A juniper, 10 ins. diam., bears North, 30 lks. dist., mkd. $\frac{1}{2}$ S14 BT.

Desc. 40 ft. over gently rolling NW. slope.

50.60 Improved dirt road, bears N. 25° 30' W. and S. 25° 30' E. about 1.30 chs. to State Highway No. 95.

60.30 Head of small draw, drains N. 50° W.; desc. 15 ft. over gentle NW. slope.

79.96 The cor. of secs. 14, 15, 22 and 23.

Land, gently rolling benchland.
Soil, sandy.
Timber, dense pinon and juniper.
Undergrowth, sagebrush and grass.

N. 89° 54' W., bet. secs. 15 and 22.

Over rolling benchland through dense timber. By triangulation; desc. about 40 ft. over general NW. slope.

9.00 Head of small draw, drains N.

21.50 State Highway No. 95, bears N. 31° W. to Hite Crossing and S. 31° E. to Blanding.

24.00 Head of draw, drains N.; asc. about 80 ft. over NE. slope.

40.02 Point for the $\frac{1}{2}$ sec. cor. of secs. 15 and 22; end triangulation.

Survey of a Portion of the Subdivision,
T. 37 S., R. 17 E.

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins. in the ground, and in a mound of stone, $3\frac{1}{2}$ ft. base to top, with brass cap mkd.

T37S R17E

$\frac{1}{4}$	<u>S15</u>
	S22
	1968

From which,

A pinon, 6 ins. diam., bears N. 15° E., 52 lks. dist., mkd. $\frac{1}{4}$ S15 BT.

A pinon, 8 ins. diam., bears S. 81° W., 49 lks. dist., mkd. $\frac{1}{4}$ S22 BT.

Asc. 75 ft. over rocky NE. slope.

50.15 Spur, slopes N.; thence by triangulation; desc. about 150 ft. over broken and rocky NW. slope.

75.00 To-ko-chi Canyon, drains N. 40° E.; asc. about 30 ft. over SE. slope.

80.04 The cor. of secs. 15, 16, 21 and 22, monumented with an iron post, $2\frac{1}{2}$ ins. diam., with brass cap mkd.

T37S R18E

<u>S16</u>	<u>S15</u>
S21	S22

1957

End triangulation.

Land, rolling and broken benchland.

Soil, sandy.

Timber, dense pinon and juniper.

Undergrowth, sagebrush and grass.

From the cor. of secs. 27, 28, 33 and 34.

S. $89^{\circ} 57'$ W., bet. secs. 28 and 33.

Over rolling benchland through dense timber. By triangulation; desc. about 100 ft. over W. slope.

12.00 Draw, drains S. 10° E.; asc. about 120 ft. over E. slope.

38.00 Top of ascent, bears N. and S.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 28 and 33; end triangulation.

Survey of a Portion of the Subdivision,
T. 37 S., R. 17 E.

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 15 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T37S R17E

$$\frac{1}{4} \frac{S28}{S33}$$

1968

From which,

A pinon, 12 ins. diam., bears N. 41° E., 55 lks. dist., mkd. $\frac{1}{4}$ S28 BT.

A pinon, 6 ins. diam., bears S. 8° E., 97 lks. dist., mkd. $\frac{1}{4}$ S33 BT.

By triangulation; desc. about 100 ft. over W. slope.

72.00

Steer Gulch, drains S. 25° W.; thence along broken S. slope.

80.00

The cor. of secs. 28, 29, 32 and 33, monumented with an iron post, $2\frac{1}{2}$ ins. diam., with brass cap mkd.

T37S R17E

$$\frac{S29|S28}{S32|S33}$$

1957

End triangulation.

Land, broken and rolling benchland.

Soil, sandy.

Timber, dense pinon and juniper.

Undergrowth, sagebrush and grass.

N. $0^\circ 02'$ W., bet. secs. 28 and 29.

Over rolling benchland, through dense timber. By triangulation; asc. about 40 ft. over SE. slope.

10.50

Gravel road, bears N. $62^\circ 45'$ E. and S. $62^\circ 45'$ W. to Halls Crossing.

17.70

Base of steep ascent, bears N. 70° E. and S. 70° W.; asc. about 130 ft. over steep, ledgy and boulder covered SE. slope.

40.00

Point for the $\frac{1}{4}$ sec. cor. of secs. 28 and 29. End triangulation.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 8 ins. in the ground, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T37S R17E

$$\frac{1}{4} \frac{S29|S28}{S32|S33}$$

1968

Survey of a Portion of the Subdivision,
T. 37 S., R. 17 E.

CHAINS

- No suitable bearing trees available.
- Cor. falls on steep E. slope in small cove facing E.
- Asc. 270 ft. over steep and ledgy SE. slope.
- 47.20 Rim, bears S. 55° W. and N. 55° E. Thence by triangulation; asc. about 200 ft. over broken and ledgy S. slope.
- 70.80 Rim, bears S. 60° W. and N. 60° E.; asc. 10 ft. over SE. slope; end triangulation.
- 80.00 Point for the cor. of secs. 20, 21, 28 and 29.
- Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd.

T37S R17E

S20	S21
S29	S28

1968

From which,

A juniper, 12 ins. diam., bears N. 40° E., 23 lks. dist., mkd. T37S R17E S21 BT.

A pinon, 6 ins. diam., bears S. 55° E., 69 lks. dist., mkd. S28 BT.

A juniper, 14 ins. diam., bears S. 46° W., 65 lks. dist., mkd. T37S R17E S29 BT.

A pinon, 8 ins. diam., bears N. 47° W., 17 lks. dist., mkd. S20 BT.

Land, mountainous broken.
Soil, sandy with exposed sandstone.
Timber, dense pinon and juniper.
Undergrowth, sagebrush and grass.

From the cor. of secs. 21, 22, 27 and 28.

N. 89° 59' W., bet. secs. 21 and 28.

Over broken mountainous land, through dense timber. By triangulation; asc. gentle SE. slope.

- .92 Graded dirt road, bears No. 24° E. and S. 24° W. to Halls Crossing.
- 32.00 Base of steep and ledgy ascent, bears S. 10° W. and N. 10° E.; asc. about 300 ft. over steep and rocky E. slope.
- 39.94 Point for the ¼ sec. cor. of secs. 21 and 28; end triangulation.

Survey of a Portion of the Subdivision,
T. 37 S., R. 17 E.

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 16 ins. in the ground, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T37S R17E

$$\frac{1}{4} \frac{S21}{S28}$$

1968

From which,

A juniper, 13 ins. diam., bears N. 16° E., 35 lks. dist., mkd. $\frac{1}{4}$ S21 BT.

A juniper, 10 ins. diam., bears S. 88° W., 20 lks. dist., mkd. $\frac{1}{4}$ S28 BT.

The cor. is 1 chain dist., below base of ledges facing E.

By triangulation; asc. about 400 ft. over steep and ledgy SE. slope.

64.95 Rim, bears N. 20° E. and S. 65° W.; thence over gently rolling land.

79.88 The cor. of secs. 20, 21, 28 and 29. End triangulation.

Land, broken and mountainous.
Soil, sandy, with exposed sandstone.
Timber, dense pinon and juniper.
Undergrowth, sagebrush and grass.

N. $0^\circ 05'$ W., bet. secs. 20 and 21.

Over rolling benchland, through dense timber; asc. 20 ft. over SE. slope.

19.80 Bulldozed road, bears irregularly N. 45° E. and S. 45° W.

29.80 Same road, bears irregularly N. 19° W. and S. 19° E.; desc. 30 ft. over N. slope.

40.02 Point for the $\frac{1}{4}$ sec. cor. of secs. 20 and 21.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 22 ins. in the ground, with brass cap mkd.

T37S R17E

$$\frac{1}{4} \frac{S20}{S21}$$

1968

Set a juniper post, 8 ins. diam., 6 ft. long, alongside iron post.

Cor. falls in burned area.

Survey of a Portion of the Subdivision,
T. 37 S., R. 17 E.

CHAINS

- 43.60 Same bulldozed road, bears irregularly N. 32° E. and S. 32° W.
- 69.65 Dirt road, bears N. 86° E. and S. 86° W.
- 80.04 The cor. of secs. 16, 17, 20 and 21, monumented with an iron post, 2½ ins. diam., with brass cap mkd.

T37S R17E

S17	S16
S20	S21

1957

Land, gently rolling.
Soil, sandy.
Timber, dense juniper and pinon.
Undergrowth, sagebrush and grass.

From the cor. of secs. 29, 30, 31 and 32, monumented with an iron post, 2½ ins. diam., with brass cap mkd.

T37S R17E

S30	S29
S31	S32

1957

N. 89° 58' W., bet. secs. 30 and 31.

Over slightly broken benchland, through dense timber; asc. 37 ft. over gentle NE. slope.

- 7.50 Bulldozed road, bears irregularly N. and S.
- 15.80 Bulldozed road, bears irregularly N. and S.; desc. 60 ft. over gentle W. slope.
- 40.00 Point for the ¼ sec. cor. of secs. 30 and 31.
- Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground, and in a collar of stone, with brass cap mkd.

T37S R17E

¼	S30
	S31

1968

From which,

A pinon, 12 ins. diam., bears N. 15° W., 6 lks. dist., mkd. ¼ S30 BT.

A juniper, 15 ins. diam., bears S. 49° W., 27 lks. dist., mkd. ¼ S31 BT.

Desc. 45 ft. over gentle NW. slope.

Survey of a Portion of the Subdivision,
T. 37 S., R. 17 E.

CHAINS	
65.60	Small wash, drains N. 75° W.
67.50	Bulldozed road, bears N. 5° E. and S. 5° W.
84.43	The cor. of secs. 25, 30, 31 and 36, on the W. bdy. of the Tp., monumented with an iron post, 2 ins. diam., with brass cap mkd.
	<p style="text-align: center;">T37S R16E R17E <u>S25 S30</u> <u>S36 S31</u> 1929</p>
	<p>Land, gently rolling benchland. Soil, sandy. Timber, dense pinon and juniper. Undergrowth, sagebrush and grass.</p>
40.00	<p>From the cor. of secs. 29, 30, 31 and 32. N. 0° 02' W., bet. secs. 29 and 30. Over gently rolling benchland through dense timber. By triangulation; asc. about 60 ft. over S. slope. Point for the ¼ sec. cor. of secs. 29 and 30. End triangulation. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;">T37S R17E ¼ S30 S29 1968</p>
	<p>From which, A juniper, 21 ins. diam., bears N. 35° E., 38 lks. dist., mkd. ¼ S29 BT. A juniper, 11 ins. diam., bears West, 15 lks. dist., mkd. ¼ S30 BT.</p>
44.00	By triangulation; asc. about 40 ft. over S. slope.
46.00	Trail road, bears irregularly E. and W.
53.00	Spur, slopes W.; thence along broken W. slope.
56.00	Draw, drains S. 50° W.; asc. about 50 ft. over SE. slope.
60.00	Spur, slopes S. 75° W.; desc. about 20 ft. over NW. slope.
	Draw, drains S. 50° W.; asc. about 240 ft. over broken SW. changing to W. slope.

Survey of a Portion of the Subdivision,
T. 37 S., R. 17 E.

CHAINS

80.00 Point for the cor. of secs. 19, 20, 29 and 30. End triangulation.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., on solid sandstone, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T37S R17E

$\frac{S19}{S30} | \frac{S20}{S29}$

1968

From which,

A juniper, 9 ins. diam., bears N. 50° E., 37 lks. dist., mkd. S20 BT.

A juniper, 20 ins. diam., bears N. 60° W., 76 lks. dist., mkd. S19 BT.

A juniper, 24 ins. diam., bears S. 35° W., 17 lks. dist., mkd. S30 BT.

A juniper, 10 ins. diam., bears S. 50° W., 76 lks. dist., mkd. S30 BT.

No bearing tree for Sec. 29.

Land, gently rolling benchland.
Soil, sandy with exposed sandstone.
Timber, dense juniper and pinon.
Undergrowth, sagebrush and grass.

From the cor. of secs. 20, 21, 28 and 29.

N. $89^\circ 50'$ W., bet. secs. 20 and 29.

Over rolling benchland, through dense timber, by triangulation.

7.50 Bulldozed road, bears S. 10° W. and N. 10° E.; asc. about 880 ft. over ledgy E. slope.

38.00 Top of mesa, bears W. and N. 50° W. End triangulation.

39.95 Point for the $\frac{1}{2}$ sec. cor. of secs. 20 and 29.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., on solid rock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T37S R17E

$\frac{1}{2} \frac{S20}{S29}$

1968

From which,

Survey of a Portion of the Subdivision,
T. 37 S., R. 17 E.

CHAINS

A pinon, 8 ins. diam., bears N. 64° E., 72 lks. dist., mkd. ¼ S20 BT.

A pinon, 14 ins. diam., bears S. 9° E., 53 lks. dist., mkd. ¼ S29 BT.

U.S.G.S. reference marker No. 1, bears S. 84° 34' W., 113 lks. dist.

Desc. 95 ft. over gentle W. slope.

61.56 Rim, bears N. 40° W. and S. 40° E.; thence by triangulation; desc. about 480 ft. over a steep and ledgy SW. slope.

75.00 Base of ledgy SW. slope, bears N. 40° W. and S. 40° E.; desc. about 40 ft. over rocky SW. slope.

79.90 The cor. of secs. 19, 20, 29 and 30. End triangulation.

Land, broken and mountainous.
Soil, sandy with exposed sandstone.
Timber, dense pinon and juniper.
Undergrowth, sagebrush and grass.

S. 89° 56' W., bet. secs. 19 and 30.

Over broken benchland through dense timber. By triangulation; desc. about 360 ft. over broken SW. slope.

40.00 Point for the ¼ sec. cor. of secs. 19 and 30. End triangulation.

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.

T37S R17E

¼ $\frac{S19}{S30}$

1968

From which,

A pinon, 10 ins. diam., bears S. 50° W., 85 lks. dist., mkd. ¼ S30 BT.

A juniper, 12 ins. diam., bears N. 15° W., 37 lks. dist., mkd. ¼ S19 BT.

By triangulation; desc. about 80 ft. over gentle W. slope.

68.48 Bulldozed road, bears irregularly N. and S.; desc. about 75 ft. over gentle W. slope.

84.33 The cor. of secs. 19, 24, 25 and 30, on the W. bdy. of the Tp., monumented with an iron post, 2 ins. diam., with brass cap mkd.

Survey of a Portion of the Subdivision,
T. 37 S., R. 17 E.

CHAINS

T37S
R16E R17E

S24	S19
S25	S30

1929.

Land, gently rolling benchland.
Soil, sandy.
Timber, dense pinon and juniper.
Undergrowth, sagebrush and grass.

From the cor. of secs. 19, 20, 29 and 30.

N. 0° 02' W., bet. secs. 19 and 20.

Over broken land through dense timber. By triangulation;
asc. about 160 ft. over precipitous and broken SW. slope.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 19 and 20, falls on
inaccessible ledges and cannot be perpetuated.

43.38 Point selected for the witness $\frac{1}{4}$ sec. cor. of secs. 19
and 20. End triangulation.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins.
in the ground, and in a mound of stone, 4 ft. base to
top, with brass cap mkd.

T37S R17E

S19	S20
-----	-----

W C

1968

By triangulation; desc. about 550 ft. over broken and
ledgy NW. slope.

80.00 Point for the cor. of secs. 17, 18, 19 and 20. End
triangulation.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins.
in the ground, and in a collar of stone, with brass cap
mkd.

T37S R17E

S18	S17
S19	S20

1968

From which,

A juniper, 5 ins. diam., bears N. 29° E., 33 lks.
dist., mkd. S17 BT.

A juniper, 16 ins. diam., bears S. 38° E., 30 lks.
dist., mkd. S20 BT.

Survey of a Portion of the Subdivision,
T. 37 S., R. 17 E.

CHAINS

A juniper, 10 ins. diam., bears S. 35° W., 15 lks.
dist., mkd. S19 BT.

A juniper, 12 ins. diam., bears N. 40° W., 22 lks.
dist., mkd. S18 BT.

Land, mountainous and broken.
Soil, sandy, exposed sandstone.
Timber, dense pinon and juniper.
Undergrowth, sagebrush and grass.

From the cor. of secs. 16, 17, 20 and 21.

S. 89° 59' W., bet. secs. 17 and 20.

Over rolling benchland through dense timber; desc. 90
ft. over gentle W. slope.

19.10 Unimproved dirt road, bears N. 60° W. and S. 60° E.

31.00 Draw, drains N. 40° W.; thence along N. slope.

34.60 Unimproved dirt road, bears N. 10° E. and S. 10° W.

39.99 Point for the $\frac{1}{4}$ sec. cor. of secs. 17 and 20.

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins.
in the ground, and in a collar of stone, with brass cap
mkd.

T37S R17E

$\frac{1}{4}$ $\frac{S17}{S20}$

1968

From which,

A juniper, 15 ins. diam., bears N. 45° E., 28 lks.
dist., mkd. $\frac{1}{4}$ S17 BT.

A juniper, 5 ins. diam., bears S. 48° E., 12 lks.
dist., mkd. $\frac{1}{4}$ S20 BT.

By triangulation; desc. about 50 ft. along gentle N.
slope.

60.00 Draw, drains N. 55° W.; asc. about 10 ft. over NE.
slope.

68.00 Small spur, slopes N.; desc. about 20 ft. over W. slope.

70.00 Small draw, drains N.; asc. about 20 ft. over NE. slope.

75.55 Top of ascent, end triangulation; desc. 20 ft. over NW.
slope.

Survey of a Portion of the Subdivision,
T. 37 S. R. 17 E.

CHAINS

79.98 The cor. of secs. 17, 18, 19 and 20.

Land, gently rolling benchland.
Soil, sandy.
Timber, dense juniper and pinon.
Undergrowth, sagebrush and grass.

S. 89° 43' W., bet. secs. 18 and 19.

Over gently rolling benchland through dense timber. By triangulation; desc. about 60 ft. over gentle W. slope.

20.00 Draw, drains N. 60° W.; asc. along N. slope.

35.15 Top of ascent, slopes N., end triangulation; desc. 20 ft. over NW. slope.

40.00 Point for the $\frac{1}{2}$ sec. cor. of secs. 18 and 19.

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 12 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T37S R17E

$\frac{1}{2}$ $\frac{S18}{S19}$
1968

From which,

A pinon, 10 ins. diam., bears N. 3° E., 59 lks. dist., mkd. $\frac{1}{2}$ S18 BT.

A pinon, 12 ins. diam., bears S. 30° E., 7 lks. dist., mkd. $\frac{1}{2}$ S19 BT.

Desc. 60 ft. over gentle NW. slope.

53.00 Bulldozed road, bears irregularly S. and N. about 4.00 chs. to junction.

67.70 Unimproved dirt road, bears N. 70° E. and S. 70° W.

84.43 The cor. of secs. 13, 18, 19 and 24, on the W. bdy. of the Tp., monumented with an iron post, 2 ins. diam., with brass cap mkd.

T37S
R16E R17E

$\frac{S13}{S24}$ $\frac{S18}{S19}$

1929

Land, gently rolling benchland.
Soil, sandy.
Timber, dense pinon and juniper.
Undergrowth, sagebrush and grass.

Survey of a Portion of the Subdivision,
T. 37 S., R. 17 E.

CHAINS

General Description

A considerable variety of land is found in the portion of Township 37 South, Range 17 East, covered by this survey. The township is mostly broken benchland covered with a dense growth of scrub juniper and pinon timber, with sagebrush and grass undergrowth. Elevation above sea level varies from 5,800 feet in section 32 to 7,800 feet in section 20, the highest portion of the township. Soil is sandy with considerable exposed sandstone ledges. The area is drained in a southerly direction by numerous draws. State Highway No. 95 enters the township in section 25 and bears northwesterly through the township. There are several trail roads throughout the township. No water was noted in this survey.

CHAINS

Blank

Page

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS

NAMES	CAPACITY
Phyllip Leslie	Civil Engineering Aid
Weldon G. Larsen	Surveying Aid
Joe W. Corbin	Surveying Aid
Craig K. Gardner	Surveying Aid
Michael W. Trentzsch	Surveying Aid

CERTIFICATE OF SURVEY

I, Craig P. Sylvester, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 15th day of April, 1968, I have surveyed a portion of the subdivisional lines of T. 37 S., R. 17 E.,

of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

February 12, 1969
(Date)

Craig P. Sylvester
(Cadastral Surveyor)
Supervisory

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

SUBMITTED FOR APPROVAL
Date MAY 23 1969

BUREAU OF LAND MANAGEMENT,
Washington, D. C.

The foregoing field notes of the survey of a portion of the subdivisional lines of T. 37 S., R. 17 E., Salt Lake Meridian, Utah

executed by Craig P. Sylvester, Supervisory Cadastral Surveyor having been critically examined and found correct, are hereby approved.

DEC 22 1969
(Date)

J. W. Jorke
(Chief, Division of Engineering)
Acting Chief, Division of Cadastral Survey

CERTIFICATE OF TRANSCRIPT

~~I CERTIFY That the foregoing transcript of the field notes of the above described surveys in _____, is a true copy of the original field notes.~~

~~(Date)~~

~~(Chief, Division of Engineering)~~

Blank

Page

Blank

Page

FIELD NOTES

OF THE
RETRACEMENT

OF

A PORTION OF THE SUBDIVISIONAL LINES

AND

THE COMPLETION SURVEY

OF

THE SUBDIVISIONAL LINES

OF

TOWNSHIP 37 SOUTH, RANGE 18 EAST

RECEIVED
STATE LAND OFFICE
JAN 20 PM 1:36
DIRECTOR GENERAL
BUREAU OF LAND MGMT.

Of the SALT LAKE Meridian,
in the State of UTAH

EXECUTED BY

CRAIG P. SYLVESTER

SUPERVISORY CADASTRAL SURVEYOR

Under special instructions dated APRIL 15, 19 68, which provided for the surveys

included under Group Number 505, approved APRIL 23, 1968,

and assignment instructions dated JUNE 20, 19 68.

Survey commenced JULY 16, 19 68

Survey completed AUGUST 27, 19 68

INDEX DIAGRAM

Township 37 SOUTH, Range 18 EAST,

6	41 5	26 4	8	2	1
40	40	26	21		8
7	38 8	25 9	10	20 11	7 12
38	37		19	19	6
18	36 17	16	15	17 14	5 13
35	34		16	15	4
19	33 20	24 21	22	14 23	3 24
33	32	23	13	13	3
30	31 29	22 28	27	12 26	1 25
30	28	22	11	10	
31	28 32	33	34	9 35	36

Township 37 South, Range 18 East

CHAINS

The North and East Boundaries were surveyed by R. C. Yundt in 1930. The South Boundary was surveyed by Donald A. Cannon, Dell Cazier and Dean Smith in 1957. The West Boundary was surveyed by Dell Cazier, Boyd S. Owens and Craig P. Sylvester in 1957. A portion of the subdivisional lines were surveyed by Donald A. Cannon and Fred R. Chappell in 1957. The following field notes are those of the completion survey of the subdivisional lines of Township 37 South, Range 18 East.

The survey was conducted in accordance with the specifications as set forth in the Manual of Surveying Instructions 1947, and Special Instructions dated April 15, 1968.

The direction of the lines of this survey were determined by reference to true meridians established on line by hour angle observations on Polaris and altitude observations on the sun. The lines were carried forward by sustained angulation being supplemented by other numerous altitude observations on the sun taken throughout the progress of the survey.

All lines were run by direct method where the lines were accessible; lines inaccessible were run by triangulation or traverse methods. Topography on lines run by traverse or triangulation methods were scaled from U.S.G.S. topographic sheet "Bears Ears, Utah."

The geographic position for the southeast corner of the township is at Latitude $37^{\circ} 31' 09.47''$ N. and Longitude $109^{\circ} 52' 26.83''$ W., as computed in 1957.

The magnetic declination was read at several stations in the township and the average of these readings was found to be 15° East.

Survey of the Subdivision,
T. 37 S., R. 18 E.

Beginning at the cor. of secs. 25, 26, 35 and 36, which is an iron post, $2\frac{1}{2}$ ins. diam., with brass cap mkd.

T37S R18E
S26 | S25
S35 | S36

1957

N. $0^{\circ} 01'$ W., bet. secs. 25 and 26.

Over rolling benchland through dense timber; asc. 15 ft. over SE. slope.

2.60

Spur, slopes S. 30° W.; desc. 85 ft. over NW. slope.

Survey of the Subdivision, Township 37 South, Range 18 East

CHAINS

- 13.65 Gulch, 50 lks wide, 12 ft. deep, drains S. 35° W.; asc.
75 ft. over SE. slope.
- 24.00 Spur, slopes E.; desc. 50 ft. over NE. slope.
- 32.00 Gulch, 50 lks. wide, 12 ft. deep, drains S. 20° E.; asc.
70 ft. over S. slope.
- 40.00 Point for the $\frac{1}{2}$ sec. cor. of secs. 25 and 26.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam. on solid rock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T37S R18E

$\frac{1}{2}$
S26 | S25

1968

From which,

A pinon, 8 ins. diam., bears N. 72° E., 28 lks.
dist., mkd. $\frac{1}{2}$ S25 BT.

A juniper, 6 ins. diam., bears N. 68° W., 36 lks.
dist., mkd. $\frac{1}{2}$ S26 BT.

Asc. 155 ft. over S. slope.

- 80.00 Point for the cor. of secs. 23, 24, 25 and 26.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 12 ins. in the ground to bedrock, and in a mound of stone, $3\frac{1}{2}$ ft. base to top, with brass cap mkd.

T37S R18E

S23 | S24
S26 | S25

1968

From which,

A juniper, 7 ins. diam., bears N. 15° 30' E., 29 lks. dist., mkd. T37S R18E S24 BT.

A juniper, 10 ins. diam., bears N. 75° E., 30 lks. dist., mkd. T37S R18E S24 BT.

A pinon, 8 ins. diam., bears S. 69° W., 14 lks. dist., mkd. T37S R18E S26 BT.

Land, rolling benchland.

Soil, sandy.

Timber, dense juniper and pinon.

Undergrowth, sagebrush.

Survey of the Subdivision, Township 37 South, Range 18 East

CHAINS

From the cor. of secs. 19, 24, 25 and 30, on the E. bdy. of the Tp., monumented with an iron post, 2 ins. diam., with brass cap mkd.

T37S
R18E R19E

S24	S19
S25	S30

1930

N. 89° 39' W., bet. secs. 24 and 25.

Over rolling benchland through dense timber. By triangulation; desc. about 40 ft. over gentle W. slope.

19.70 Kane Gulch, drains irregularly S.; asc. about 40 ft. over E. slope.

35.70 End triangulation; thence along S. slope.

39.84 Point for the $\frac{1}{2}$ sec. cor. of secs. 24 and 25.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

T37S R18E

$\frac{1}{2}$	S24
	S25

1968

Desc. 40 ft. over SW. slope.

44.25 Enter dense timber, bears N. 45° W. and S. 45° E.

64.25 Gravel road bears S. 7° E. to Mexican Hat and N. 5° W.

68.30 Hollow, drains S. 20° W.; asc. 65 ft. along S. slope.

79.68 The cor. of secs. 23, 24, 25 and 26.

Land, rolling benchland.

Soil, sandy.

Timber, dense juniper and pinon.

Undergrowth, sagebrush.

N. 0° 01' W., bet. secs. 23 and 24.

Over rolling benchland through dense timber; asc. gentle S. slope.

24.00 Leave dense timber, bears irregularly E. and W.; enter cleared area.

40.00 Point for the $\frac{1}{2}$ sec. cor. of secs. 23 and 24.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

Survey of the Subdivision, Township 37 South, Range 18 East

CHAINS

T37S R18E

 $\frac{1}{2}$ S23 | S24

1968

Set a steel fence post alongside.

Asc. 60 ft. over gentle S. slope through cleared area.

80.00 Point for the cor. of secs. 13, 14, 23 and 24.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with cedar post alongside, and brass cap mkd.

T37S R18E

S14 | S13
S23 | S24

1968

Land, rolling benchland.

Soil, sandy.

Timber, dense juniper and pinon S. portion; cleared N. portion.

Undergrowth, sagebrush, grass.

From the cor. of secs. 13, 18, 19 and 24, on the E. bdy. of the Tp., monumented with an iron post, 2 ins. diam., with brass cap mkd.

T37S
R18E R19ES13 | S18
S24 | S19

1930

N. $89^{\circ} 39'$ W., bet. secs. 13 and 24.

Over rolling land through dense timber; asc. 40 ft. over E. slope.

3.85 Ridge, bears N. and S.; thence by triangulation; desc. about 50 ft. over W. slope.

20.75 Lyman Canyon, drains irregularly S.; asc. about 80 ft. over E. slope.

39.88 Point for the $\frac{1}{2}$ sec. cor. of secs. 13 and 24.Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

T37S R18E

 $\frac{1}{2}$ — S13
S24

1968

Survey of the Subdivision, Township 37 South, Range 18 East

CHAINS

From which,

A pinon, 6 ins. diam., bears S. 86° W., 162 lks. dist., mkd. $\frac{1}{4}$ S24 BT.

A juniper, 7 ins. diam., bears N. 15° W., 33 lks. dist., mkd. $\frac{1}{4}$ S13 BT.

Asc. 60 ft. over E. slope.

43.20 Leave dense timber, bears N. 20° W. and S. 15° E.; enter cleared area.

54.10 Top of ascent, bears N. and S.; desc. 25 ft. along S. slope.

66.80 Gravel road to Mexican Hat, bears nearly N. and S.

79.76 The cor. of secs. 13, 14, 23 and 24.

Land, rolling benchland.

Soil, sandy.

Timber, dense juniper and pinon.

Undergrowth, sagebrush and grass.

N. 0° 01' W., bet. secs. 13 and 14.

Over rolling land through reseeded area; asc. 25 ft. over gentle S. slope.

21.50 Top of ascent, bears E. and W.; desc. 75 ft. over N. slope.

26.70 Enter dense timber, bears E. and W.

33.00 Old Mormon Trail, bears S. 80° E. and N. 80° W.

35.85 Hollow, drains W.; asc. 35 ft. over S. slope.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 13 and 14.

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 3 $\frac{1}{2}$ ft. base to top, with brass cap mkd.

T37S R18E

 $\frac{1}{4}$

S14|S13

1968

From which,

A pinon, 8 ins. diam., bears S. 60° E., 30 lks. dist., mkd. $\frac{1}{4}$ S13 BT.

A pinon, 12 ins. diam., bears N. 42° 10' W., 114 lks. dist., mkd. $\frac{1}{4}$ S14 BT.

Asc. 15 ft. over S. slope.

Survey of the Subdivision, Township 37 South, Range 18 East

CHAINS

- 43.80 Spur, slopes S. 50° W.; desc. 20 ft. over NW. slope.
- 46.00 Wash, 15 lks. wide, 2 ft. deep, drains S. 46° W.; asc. 50 ft. over S. slope.
- 55.50 Ridge, bears E. and W.; desc. 20 ft. over N. slope.
- 66.57 Fence, in draw, drains W., bears N. 78° E. and S. 78° W.; asc. 25 ft. over S. slope.
- 72.50 Top of ascent, bears E. and W.; desc. 60 ft. over N. slope.
- 80.00 Point for the cor. of secs. 11, 12, 13 and 14.

Set an iron post, 30 ins. long, 2½ ins. diam., 4 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T37S R18E
 S11|S12
 S14|S13
 1968

From which,

- A pinon, 9 ins. diam., bears N. 20° E., 38 lks. dist., mkd. T37S R18E S12 BT.
- A pinon, 4 ins. diam., bears N. 68° W., 59 lks. dist., mkd. T37S R18E S11 BT.
- A pinon, 12 ins. diam., bears S. 36° W., 43 lks. dist., mkd. T37S R18E S14 BT.

Land, rolling benchland.
 Soil, sandy.
 Timber, dense juniper and pinon.
 Undergrowth, sagebrush and grass.

From the cor. of secs. 7, 12, 13 and 18, on the E. bdy. of the Tp., monumented with an iron post, 2 ins. diam., with brass cap mkd.

T37S
 R18E R19E
 S12|S7
 S13|S18
 1930

N. 89° 39' W., bet. secs. 12 and 13.

Over broken land through dense timber. By triangulation; desc. about 150 ft. over broken NW. slope.

- 11.95 Lyman Canyon, drains S. 25° W.; asc. about 100 ft. over broken SE. slope.

Survey of the Subdivision, Township 37 South, Range 18 East

CHAINS

37.60 End triangulation.

39.97 Point for the $\frac{1}{4}$ sec, cor, of secs. 12 and 13.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins., diam., 24 ins. in the ground, with brass cap mkd.

T37S R18E

$$\frac{1}{4} \frac{S12}{S13}$$

1968

From which,

A pinon, 6 ins. diam., bears S. 41° E., 16 lks. dist., mkd. $\frac{1}{4}$ S13 BT.

A pinon, 12 ins. diam., bears N. 58° W., 51 lks. dist., mkd. $\frac{1}{4}$ S12 BT.

Private surveyor's point bears S. $4^\circ 24'$ E., 26 lks. dist.

Desc. 100 ft. over W. slope.

48.55 Leave dense timber, bears NW. and SE.

50.25 State Highway No. 95, bears N. 15° W. and S. 15° E.54.35 Oiled road, bears S. 10° W. to Mexican Hat, and N. 10° E., 7.00 chs. to State Highway No. 95.

55.00 Enter dense timber, bears N. and S.

79.94 The cor. of secs. 11, 12, 13 and 14.

Land, broken.

Soil, sandy.

Timber, dense pinon and juniper.

Undergrowth, sagebrush and grass.

N. $0^\circ 09'$ W., bet. secs. 11 and 12.

Over broken benchland through dense timber; desc. 25 ft. over N. slope.

3.00 Hollow, drains S. 45° W.; asc. 100 ft. over S. slope.

15.60 Ridge, bears E. and W.; desc. 90 ft. over N. slope.

34.75 Grand Gulch, drains S. 40° W. from E.; asc. 60 ft. over SE. slope.39.83 Point for the $\frac{1}{4}$ sec. cor. of secs. 11 and 12.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, $3\frac{1}{2}$ ft. base to top, with brass cap mkd.

Survey of the Subdivision, Township 37 South, Range 18 East

CHAINS

T37S R18E

$$\frac{1}{2}$$

S11	S12
-----	-----

1968

From which,

A pinon, 6 ins. diam., bears N. 65° E., 31 lks. dist., mkd. $\frac{1}{2}$ S12 BT.

A pinon, 12 ins. diam., bears N. 15° W., 36 lks. dist., mkd. $\frac{1}{2}$ S11 BT.

Asc. about 200 ft. over general S. slope by traverse.

42.10 State Highway No. 95, bears S. 75° E. and curves N. 45° W.

79.66 The cor. of secs. 1, 2, 11 and 12, monumented with an iron post, 2½ ins. diam., with brass cap mkd.

T37S R18E

S2	S1
S11	S12

1957

Land, broken benchland.
Soil, sandy.
Timber, dense pinon and juniper.
Undergrowth, sagebrush and grass.

From the cor. of secs. 1, 6, 7 and 12, on the E. bdy. of the Tp., monumented with an iron post, 2 ins. diam., with brass cap mkd.

T37S
R18E R19E

S1	S6
S12	S7

1930

N. 89° 43' W., bet. secs. 1 and 12.

Over rolling benchland through dense timber. By triangulation; desc. about 200 ft. over general W. slope.

40.08 Point for the $\frac{1}{2}$ sec. cor. of secs. 1 and 12.

Set an iron post, 30 ins. long, 2½ ins. diam., on solid stone, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T37S R18E

$$\frac{1}{2}$$

S1
S12

1968

Survey of the Subdivision, Township 37 South, Range 18 East

CHAINS

From which,

A pinon, 8 ins. diam., bears N. 44° E., 26 lks. dist., mkd. ½ S1 BT.

A pinon, 8 ins. diam., bears S. 4° 40' W., 16 lks. dist., mkd. ½ S12 BT.

Desc. 30 ft. over NW. slope.

42.55 Grand Gulch, drains S. 55° W.; asc. 85 ft. over SE. slope.

49.70 Spur, slopes S. 40° W.; desc. 50 ft. over W. slope.

54.90 Hollow, drains S.; asc. 75 ft. over E. slope.

80.16 The cor. of secs. 1, 2, 11 and 12.

Land, rolling.
Soil, sandy.
Timber, dense pinon and juniper.
Undergrowth, sagebrush and grass.

From the cor. of secs. 2, 3, 34 and 35, on the S. bdy. of the Tp., monumented with an iron post, 2½ ins. diam., with brass cap mkd.

T37S R18E
S34|S35
S3|S2
T38S R18E
1957

N. 0° 01' W., bet. secs. 34 and 35.

Over broken benchland through dense timber; asc. 115 ft. over ledgy S. slope.

10.60 Top of ledge, bears E. and W.; asc. 35 ft. over SE. slope.

20.10 Top of ascent, bears NE. and SW.; desc. 40 ft. over N. slope.

32.40 Head of draw, drains S. 80° W.; asc. 30 ft. over W. slope.

38.40 Low ridge, bears W. and curves S.; desc. 5 ft. along S. slope.

40.00 Point for the ¼ sec. cor. of secs. 34 and 35.

Set an iron post, 30 ins. long, 2½ ins. diam., on solid sandstone, and in a mound of stone, 4½ ft. base to top, with brass cap mkd.

Survey of the Subdivision, Township 37 South, Range 18 East

CHAINS

T37S R18E

$$\frac{1}{2}$$

S34	S35
-----	-----

1968

From which,

A juniper, 16 ins. diam., bears S. 8° E., 38 lks. dist., mkd. $\frac{1}{2}$ S35 BT.

A pinon, 8 ins. diam., bears S. 88° 15' W., 88 lks. dist., mkd. $\frac{1}{2}$ S34 BT.

Asc. 130 ft. over gentle SW. slope.

79.90 Trail road, bears N. 80° W. and S. 80° E.

80.00 Point for the cor. of secs. 26, 27, 34 and 35.

Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd.

T37S R18E

S27	S26
S34	S35

1968

From which,

A juniper, 16 ins. diam., bears N. 53° E., 42 lks. dist., mkd. S26 BT.

A juniper, 14 ins. diam., bears S. 70° 45' E., 33 lks. dist., mkd. S35 BT.

A juniper, 14 ins. diam., bears S. 23° 45' W., 67 lks. dist., mkd. S34 BT.

A juniper, 12 ins. diam., bears N. 82° 15' W., 26 lks. dist., mkd. S27 BT.

Land, rolling and broken benchland.

Soil, sandy.

Timber, dense pinon and juniper.

Undergrowth, sagebrush and grass.

From the cor. of secs. 25, 26, 35 and 36.

N. 89° 41' W., bet. secs. 26 and 35.

Over broken benchland through dense timber. By triangulation, over benchland and solid sandstone.

3.00 Old Mormon Trail, bears N. 10° E. and S. 10° W.

7.90 Kane Gulch, drains S. 15° W.; asc. about 30 ft. over E. slope.

32.90 Rim of ledge, bears, N. 10° W. and curves SE.; desc. about 80 ft. over ledgy W. slope.

36.90 Draw, drains S. 10° E.; asc. about 40 ft. over E. slope.

39.94 Point for the $\frac{1}{2}$ sec. cor. of secs. 26 and 35.

Survey of the Subdivision, Township 37 South, Range 18 East

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 3 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T37S R18E

$\frac{1}{2}$ $\frac{S26}{S35}$

1968

From which,

A pinon, 8 ins. diam., bears N. $30^{\circ} 30'$ W., 52 lks. dist., mkd. $\frac{1}{2}$ S26 BT.

A pinon, 10 ins. diam., bears S. $7^{\circ} 15'$ E., 24 lks. dist., mkd. S35 BT.

Asc. 75 ft. over E. slope.

50.40 Slope changes; asc. 35 ft. over gentle SE. slope.

66.50 Low rise, bears NW. and SE.; desc. 15 ft. over SW. slope.

79.88 The cor. of secs. 26, 27, 34 and 35.

Land, broken bench E. portion; rolling W. portion.
Soil, sandy.

Timber, dense pinon and juniper.

Undergrowth, sagebrush and grass.

N. $89^{\circ} 44'$ W., bet. secs. 27 and 34.

Over broken benchland through dense timber. By triangulation; desc. about 80 ft. over gentle NW. slope.

0.50 Trail road, bears N. 80° W. and S. 80° E.

22.40 Slope changes, end triangulation; desc. 65 ft. along N. slope.

39.30 Point selected for the witness $\frac{1}{2}$ sec. cor. of secs. 27 and 34, on small point, projects N.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., over (+) on solid sandstone, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T37S R18E

$\frac{1}{2}$ $\frac{W \leftarrow S27}{C \leftarrow S34}$

1968

No suitable bearing trees.

Survey of the Subdivision, Township 37 South, Range 18 East

CHAINS	
	Thence by triangulation; desc. about 50 ft. along general W. slope.
40.10	Point for the $\frac{1}{2}$ sec. cor. of secs. 27 and 34, falls on small ledge, facing W. and cannot be perpetuated.
52.00	Grand gulch, drains irregularly S.; asc. about 80 ft. over broken E. slope.
80.20	The cor. of secs. 27, 28, 33 and 34, monumented with an iron post, $2\frac{1}{2}$ ins. in diam., with brass cap mkd.
	T37S R18E <u>S28 S27</u> S33 S34 1957
	Land, broken and rolling benchland. Soil, sandy. Timber, dense juniper and pinon. Undergrowth, sagebrush and grass.
	From the cor. of secs. 26, 27, 34 and 35. N. $0^{\circ} 01'$ W., bet. secs. 26 and 27. Over high mountain benchland through dense timber; desc. 55 ft. along gentle W. slope.
21.35	Base of descent, slopes W.; asc. 55 ft. along gentle W. slope.
40.00	Point for the $\frac{1}{2}$ sec. cor. of secs. 26 and 27. Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground, with brass cap mkd.
	T37S R18E $\frac{1}{2}$ S27 S26 1968
	From which, A juniper, 12 ins. diam., bears N. $71^{\circ} 30'$ E., 19 lks. dist., mkd. T37S R18E $\frac{1}{2}$ S26 BT. A juniper, 15 ins. diam., bears N. $62^{\circ} 30'$ W., 19 lks. dist., mkd. $\frac{1}{2}$ S27 BT. Asc. 45 ft. along general W. slope.
50.10	Trail road, on curve, bears N. 70° E. and S. 60° W.
80.00	Point for the cor. of secs. 22, 23, 26 and 27. Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground, with brass cap mkd.
	T37S R18E <u>S22 S23</u> S27 S26 1968

Survey of the Subdivision, Township 37 South, Range 18 East

CHAINS

From which,

A pinon, 10 ins. diam., bears N. 32° E., 22 lks. dist., mkd. S23 BT.

A juniper, 20 ins. diam., bears S. 18° E., 10 lks. dist., mkd. S26 BT.

A juniper, 18 ins. diam., bears S. 64° W., 48 lks. dist., mkd. S27 BT.

A juniper, 12 ins. diam., bears N. 4° W., 48 lks. dist., mkd. S22 BT.

Land, rolling benchland.

Soil, sandy.

Timber, dense pinon and juniper.

Undergrowth, sagebrush and grass.

From the cor. of secs. 23, 24, 25 and 26.

N. 89° 41' W., bet. secs. 23 and 26.

Over broken land through dense timber. By triangulation; desc. about 40 ft. over W. slope.

8.00 Gulch, drains S. 10° W.; asc. about 40 ft. over rolling land.

39.90 Point for the $\frac{1}{2}$ sec. cor. of secs. 23 and 26.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with cedar post alongside, and brass cap mkd.

T37S R18E

$\frac{1}{2}$ $\frac{S23}{S26}$

1968

Continue over gently rolling land through reseeded area.

78.00 Ridge, bears N. 45° E. and S. 45° W.; desc. 10 ft. over NW. slope.

79.80 The cor. of secs. 22, 23, 26 and 27.

Land, rolling benchland.

Soil, sandy.

Timber, dense pinon and juniper in uncleared areas.

Undergrowth, sagebrush and grass.

N. 89° 41' W., bet. secs. 22 and 27.

Over broken land through dense timber. By triangulation; desc. about 30 ft. over NW. slope.

Survey of the Subdivision, Township 37 South, Range 18 East

CHAINS	
10.75	Slope changes; desc. about 100 ft. along N. slope.
29.00	Slope changes. End triangulation; desc. 180 ft. over ledgy W. slope.
38.15	Point selected for the witness $\frac{1}{4}$ sec. cor. of secs. 22 and 27.
	Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 3 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.
	T37S R18E
	$\begin{array}{c} \frac{1}{4} \text{ W } \overline{\text{S22}} \\ \text{C } \text{S27} \end{array}$
	1968
	From which,
	A pinon, 5 ins. diam., bears N. $50^{\circ} 45'$ E., 36 lks. dist., mkd. BT.
	A pinon, 9 ins. diam., bears S. 15° W., 47 lks. dist., mkd. $\frac{1}{4}$ S27 BT.
	Thence by triangulation; desc. about 20 ft. over ledgy W. slope.
40.15	Point for the $\frac{1}{4}$ sec. cor. of secs. 22 and 27 falls in bottom of Grand Gulch, drains S. 50° W., and cannot be perpetuated. Asc. about 160 ft. over broken and ledgy SE. slope.
80.30	The cor. of secs. 21, 22, 27 and 28, monumented with an iron post, $2\frac{1}{2}$ ins. diam., with brass cap mkd.
	T37S R18E
	$\begin{array}{c} \text{S21} \text{S22} \\ \text{S28} \text{S27} \end{array}$
	1957
	Land, broken benchland. Soil, sandy, exposed sandstone. Timber, dense pinon and juniper. Undergrowth, sagebrush and grass.
	From the cor. of secs. 22, 23, 26 and 27.
	N. $0^{\circ} 01'$ W., bet. secs. 22 and 23.
	Over broken benchland through west edge of reseeded area; asc. 20 ft. over SE. slope.
10.70	Top of ascent, slopes SW.; thence by triangulation; desc. about 150 ft. over broken and ledgy NW. slope.
40.00	Point for the $\frac{1}{4}$ sec. cor. of secs. 22 and 23 falls on small ledge facing W. and cannot be perpetuated.

Survey of the Subdiviion, Township 37 South, Range 18 East

CHAINS

40.10 Point selected for the witness $\frac{1}{2}$ sec. cor. of secs. 22 and 23.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., over a (X) cross, cut in solid sandstone, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T37S R18E

$\frac{1}{2}$
S22 | S23

WVC

1968

From which,

A pinon, 12 ins. diam., bears N. 85° E., 36 lks. dist., mkd. $\frac{1}{2}$ S23 BT.

Cor. located at head of small cove, drains W.

Continue by triangulation; desc. about 80 ft. over broken and ledgy NW. slope.

52.00 Grand Gulch, drains S. 40° W.; asc. about 180 ft. over broken and ledgy SE. slope.

79.10 End triangulation on knoll, 3.00 chs. diam.

80.00 Point for the cor. of secs. 14, 15, 22 and 23.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 8 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T37S R18E

S15 | S14
S22 | S23

1968

From which,

A pinon, 8 ins. diam., bears N. $52^{\circ} 45'$ E., 28 lks. dist., mkd. S14 BT.

A juniper, 6 ins. diam., bears S. $83^{\circ} 30'$ E., 25 lks. dist., mkd. S23 BT.

A juniper, 11 ins. diam., bears S. $86^{\circ} 30'$ W., 29 lks. dist., mkd. S22 BT.

A pinon, 6 ins. diam., bears N. 81° W., 36 lks. dist., mkd. S15 BT.

Land, broken bench.

Soil, rocky sand.

Timber, dense pinon and juniper.

Undergrowth, sagebrush and grass.

From the cor. of secs. 13, 14, 23 and 24.

N. $89^{\circ} 41'$ W., bet. secs. 14 and 23.

Survey of the Subdivision, Township 37 South, Range 18 East

CHAINS

- Over rolling land through reseeded area; desc. 30 ft. over gentle SW. slope.
- 12.95 Enter dense timber, bears N. and S.
- 18.00 Slope changes, thence by triangulation; desc. about 150 ft. over broken NW. slope.
- 38.67 Point selected for the $\frac{1}{2}$ sec. cor. of secs. 14 and 23.
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., over a (X) cross, cut in solid sandstone, and in a mound of stone, $4\frac{1}{2}$ ft. base to top, with brass cap mkd.
- T37S R18E
 $\frac{1}{2}$ W ← S14
 C S23
 1968
- Thence by triangulation; desc. about 50 ft. over ledgy NW. slope.
- 39.94 Point for the $\frac{1}{2}$ sec. cor. of secs. 14 and 23 falls on ledge sloping W. and cannot be perpetuated.
- 43.00 Grand Gulch, drains S. 50° W.; asc. about 200 ft. over broken and ledgy SE. slope.
- 59.00 Top of ascent, bears N. and S. End triangulation; desc. 60 ft. over W. slope.
- 67.40 Small draw, drains S. 20° E.; asc. 85 ft. over NE. slope.
- 78.70 Top of knoll; desc. 25 ft. over NW. slope.
- 79.88 The cor. of secs. 14, 15, 22 and 23.
- Land, broken benchland.
 Soil, sandy, exposed sandstone.
 Timber, dense pinon and juniper.
 Undergrowth, sagebrush and grass.
- N. $89^\circ 39'$ W., bet. secs. 15 and 22.
- Over broken benchland through dense timber. By triangulation; desc. about 150 ft. over broken NW. slope.
- 15.20 Canyon, drains S. 50° W.; asc. about 75 ft. over broken SE. slope.
- 26.20 Spur, slopes S.; desc. about 50 ft. over W. slope.
- 32.20 Draw, drains S.; asc. about 70 ft. over broken E. slope.
- 40.10 Point for the $\frac{1}{2}$ sec. cor. of secs. 15 and 22.

Survey of the Subdivision, Township 37 South, Range 18 East

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., over a (X) cross, cut in solid sandstone, and in a mound of stone, 5 ft. base to top, with brass cap mkd.

T37S R18E

$$\frac{1}{2} \frac{S15}{S22}$$

1968

From which,

A pinon, 8 ins. diam., bears S. $12^{\circ} 45'$ W., 113 lks. dist., mkd. $\frac{1}{2}$ S22 BT.

A pinon, 6 ins. diam., bears N. $25^{\circ} 15'$ W., 52 lks. dist., mkd. $\frac{1}{2}$ S15 BT.

Asc. 30 ft. over E. slope.

- 43.50 Spur, slopes S.; desc. 5 ft. over gentle W. slope.
- 46.10 Rim of draw, bears N. and curves S. 45° W.; desc. 65 ft. over broken W. slope.
- 52.20 Draw, drains S.; asc. 55 ft. over ledgy E. slope.
- 58.70 Rim of same draw, bears S. and curves N. 45° W.; asc. 25 ft. over gentle E. slope.
- 80.00 State Highway No. 95, bears N. $27^{\circ} 40'$ E. and S. $27^{\circ} 40'$ W.
- 80.20 Point for the cor. of secs. 15, 16, 21 and 22, from which the witness cor. bears N. $0^{\circ} 02'$ W., 40 lks. dist., monumented with an iron post, $2\frac{1}{2}$ ins. diam., with brass cap mkd.

T37S R18E

$$\frac{S16 | S15}{S21 | S22}$$

WVC

1957

Land, broken and rolling benchland.
Soil, sandy, exposed sandstone.
Timber, dense pinon and juniper.
Undergrowth, sagebrush and grass.

From the cor. of secs. 14, 15, 22 and 23.

N. $0^{\circ} 01'$ W., bet. secs. 14 and 15.

Over broken land through dense timber. By triangulation; desc. about 70 ft. over NW. slope.

Survey of the Subdivision, Township 37 South, Range 18 East

CHAINS

18.00 Canyon, drains S. 40° W.; asc. about 130 ft. over SE. slope.

40.00 Point for the $\frac{1}{2}$ sec. cor. of secs. 14 and 15.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 4 ins. in the ground to bedrock, and in a mound of stone, 5 ft. base to top, with brass cap mkd.

T37S R18E

$\frac{1}{2}$
S15|S14

1968

From which,

A pinon, 8 ins. diam., bears N. 80° E., 32 lks. dist., mkd. $\frac{1}{2}$ S14 BT.

A pinon, 10 ins. diam., bears N. 80° W., 21 lks. dist., mkd. $\frac{1}{2}$ S15 BT.

Asc. 20 ft. along E. slope.

41.35 Spur, slopes E.; thence by triangulation; desc. about 30 ft. along E. slope.

52.00 Same canyon, drains S. 20° E.; asc. about 100 ft. over SW. slope.

80.00 Point for the cor. of secs. 10, 11, 14 and 15.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 22 ins. in the ground, with brass cap mkd.

T37S R18E

S10|S11
S15|S14

1968

From which,

A pinon, 14 ins. diam., bears N. 55° E., 31 lks. dist., mkd. S11 BT.

A juniper, 15 ins. diam., bears S. 36° E., 31 lks. dist., mkd. S14 BT.

A juniper, 9 ins. diam., bears S. 71° 15' W., 24 lks. dist., mkd. S15 BT.

A juniper, 20 ins. diam., bears N. 19° W., 39 lks. dist., mkd. S10 BT.

Land, broken.

Soil, sandy, exposed sandstone.

Timber, dense pinon and juniper.

Undergrowth, sagebrush and grass.

From the cor. of secs. 11, 12, 13 and 14.

Survey of the Subdivision, Township 37 South, Range 18 East

CHAINS		
	<p>N. 89° 40' W., bet. secs. 11 and 14.</p> <p>Over broken land through dense timber. By triangulation; along S. slope.</p>	
8.00	Low spur, slopes S.; desc. about 200 ft. over broken W. slope.	
18.00	Grand Gulch, drains irregularly S.; asc. about 80 ft. over broken E. slope.	
30.70	Old Mormon Trail, bears N. 30° W. and S. 50° E. on spur, slopes S.; thence along S. slope. End triangulation.	
39.88	<p>Point for the $\frac{1}{2}$ sec. cor. of secs. 11 and 14.</p> <p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T37S R18E</p> <p style="text-align: center;">$\frac{1}{2}$ $\frac{S11}{S14}$</p> <p style="text-align: center;">1968</p> <p>From which,</p> <p style="padding-left: 40px;">A juniper, 14 ins. diam., bears N. 45° E., 18 lks. dist., mkd. $\frac{1}{2}$ S11 BT.</p> <p style="padding-left: 40px;">A juniper, 12 ins. diam., bears S. 77° W., 32 lks. dist., mkd. $\frac{1}{2}$ S14 BT.</p> <p>Continue along broken S. slope.</p>	
47.60	By triangulation; desc. about 80 ft. over broken W. slope.	
54.00	Draw, drains S. 15° W.; asc. about 80 ft. over SE. slope.	
67.00	Spur, slopes S.; end triangulation; desc. 25 ft. over SW. slope.	
79.76	<p>The cor. of secs. 10, 11, 14 and 15.</p> <p>Land, broken.</p> <p>Soil, sandy, exposed sandstone.</p> <p>Timber, dense pinon and juniper.</p> <p>Undergrowth, sagebrush and grass.</p>	
	<p>N. 89° 41' W., bet. secs. 10 and 15.</p> <p>Over rolling benchland through dense timber; desc. 20 ft. over NW. slope.</p>	
8.35	Canyon, drains irregularly S.; asc. 45 ft. over E. slope.	
21.80	Top of ascent, slopes S.; desc. 40 ft. over W. slope.	

Survey of the Subdivision, Township 37 South, Range 18 East

CHAINS

34.00 State Highway No. 95, bears N. 30° E. and S. 30° W.

40.20 Point for the ¼ sec. cor. of secs. 10 and 15.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T37S R18E

¼ — $\frac{S10}{S15}$

1968

Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.

Thence by triangulation; desc. about 70 ft. over gentle SW. slope.

80.40 The cor. of secs. 9, 10, 15 and 16, monumented with an iron post, 2½ ins. diam., with brass cap mkd.

T37S R18E

$\frac{S9|S10}{S16|S15}$

1957

Land, rolling benchland.

Soil, sandy.

Timber, dense pinon and juniper.

Undergrowth, sagebrush and grass.

From the cor. of secs. 10, 11, 14 and 15.

N. 0° 15' W., bet. secs. 10 and 11.

Over rolling benchland through dense timber; asc. 50 ft. over gently rolling S. slope.

10.00 Leave dense timber, bears W. and curves SE., enter sagebrush flat.

28.95 State Highway No. 95, bears N. 65° 05' E. and S. 65° 05' W.

39.76 Point for the ¼ sec. cor. of secs. 10 and 11.

Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground, with cedar post, 5 ft. above ground, alongside, with brass cap mkd.

T37S R18E

¼ — $\frac{S10|S11}{S16|S15}$

1968

Asc. 80 ft. over gently rolling S. slope by triangulation

43.00 Trail road, bears E. and W.

46.00 Enter dense timber, bears E. and W.

Survey of the Subdivision, Township 37 South, Range 18 East

CHAINS					
79.52	<p>The cor. of secs. 2, 3, 10 and 11, monumented with an iron post, 2½ ins. diam., with brass cap mkd.</p> <p style="text-align: center;">T37S R18E</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S3</td> <td style="padding: 0 5px;">S2</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S10</td> <td style="padding: 0 5px;">S11</td> </tr> </table> <p style="text-align: center;">1957</p> <p>Land, gently rolling benchland. Soil, sandy. Timber, dense pinon and juniper. Undergrowth, sagebrush and grass.</p>	S3	S2	S10	S11
S3	S2				
S10	S11				
31.00	<p>N. 89° 40' W., bet. secs. 3 and 10.</p> <p>Over rolling benchland through dense timber. By triangulation; desc. about 100 ft. over SW. slope.</p> <p>Dirt road, bears N. to Bears Ears and S.</p>				
39.98	<p>Point for the ¼ sec. cor. of secs. 3 and 10.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T37S R18E</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">¼</td> <td style="padding: 0 5px;">S3</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;"></td> <td style="padding: 0 5px;">S10</td> </tr> </table> <p style="text-align: center;">1968</p> <p>From which,</p> <p style="padding-left: 40px;">A juniper, 20 ins. diam., bears N. 21° 30' E., 45 lks. dist., mkd. ¼ S3 BT.</p> <p style="padding-left: 40px;">A juniper, 10 ins. diam., bears S. 74° 15' E., 68 lks. dist., mkd. ¼ S10 BT.</p> <p style="padding-left: 40px;">Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.</p> <p>Desc. 30 ft. over gentle W. slope.</p>	¼	S3		S10
¼	S3				
	S10				
40.77	<p>Hard surface highway, bears northwesterly to Bridges National Monument, and S. 40° 52' E.</p>				
58.00	<p>Armstrong Canyon, drains S. 15° W.; asc. 15 ft. over gentle E. slope.</p>				
79.96	<p>The cor. of secs. 3, 4, 9 and 10, monumented with an iron post, 2½ ins. diam., with brass cap mkd.</p> <p style="text-align: center;">T37S R18E</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S4</td> <td style="padding: 0 5px;">S3</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S9</td> <td style="padding: 0 5px;">S10</td> </tr> </table> <p style="text-align: center;">1957</p>	S4	S3	S9	S10
S4	S3				
S9	S10				

Survey of the Subdivision, Township 37 South, Range 18 East

CHAINS

Land, rolling benchland.
Soil, sandy.
Timber, dense pinon and juniper.
Undergrowth, sagebrush and grass.

From the cor. of secs. 27, 28, 33 and 34.

N. 89° 42' W., bet. secs. 28 and 33.

Over rolling benchland through dense timber; asc. 130 ft. over SE. slope.

37.30 Top of rise, bears N. and S.; thence over gently rolling land.

40.11 Point for the ½ sec. cor. of secs. 28 and 33.

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground, with brass cap mkd.

T37S R18E

½ $\frac{S28}{S33}$

1968

From which,

A juniper, 8 ins. diam., bears S. 20° E., 12 lks. dist., mkd. ½ S33 BT.

A juniper, 13 ins. diam., bears N. 5° W., 14 lks. dist., mkd. ½ S28 BT.

Continue over gently rolling land draining SW.

80.22 The cor. of secs. 28, 29, 32 and 33, monumented with an iron post, 2½ ins. diam., with brass cap mkd.

T37S R18E

$\frac{S29}{S32} | \frac{S28}{S33}$

1957

Land, gently rolling benchland.
Soil, sandy.
Timber, dense pinon and juniper.
Undergrowth, sagebrush and grass.

N. 0° 03' W., bet. secs. 28 and 29.

Over rolling benchland through dense timber; desc. over gently rolling NW. slope.

15.00 Head of Pine Canyon, drains S. 60° W.; asc. 25 ft. over gentle SW. slope.

40.00 Point for the ½ sec. cor. of secs. 28 and 29.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T37S R18E

½ $\frac{S29}{S33} | \frac{S28}{S33}$

1968

Survey of the Subdivision, Township 37 South, Range 18 East

CHAINS

From which,

A juniper, 12 ins. diam., bears S. 62° 30' E., 27 lks. dist., mkd. $\frac{1}{2}$ S28 BT.

A juniper, 9 ins. diam., bears N. 5° W., 22 lks. dist., mkd. $\frac{1}{2}$ S29 BT.

Continue along W. slope.

- 41.90 Trail road, bears N. 40° E. and curves irregularly S.
 50.60 State Highway No. 95, bears N. 57° 20' E. and S. 57° 20' W.
 54.30 Leave dense timber, bears E. and W.
 78.00 Enter dense timber, bears NE. and SW.
 80.00 Point for the cor. of secs. 20, 21, 28 and 29.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T37S R18E

S20	S21
S29	S28

1968

From which,

A juniper, 7 ins. diam., bears N. 2° 45' E., 183 lks. dist., mkd. S21 BT.

A pinon, 6 ins. diam., bears S. 54° E., 163 lks. dist., mkd. BT.

A juniper, 6 ins. diam., bears S. 47° W., 12 lks. dist., mkd. S29 BT.

A juniper, 13 ins. diam., bears N. 45° W., 135 lks. dist., mkd. S 20 BT.

Land, rolling benchland.

Soil, sandy.

Timber, dense pinon and juniper S. portion; widely scattered N. portion.

Undergrowth, sagebrush and grass.

From the cor. of secs. 21, 22, 27 and 28.

N. 89° 45' W., bet. secs. 21 and 28.

Over gently rolling land through dense timber.

- 40.10 Point for the $\frac{1}{4}$ sec. cor. of secs. 21 and 28.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

Survey of the Subdivision, Township 37 South, Range 18 East

CHAINS

T37S R18E

$$\frac{1}{2} \frac{S21}{S28}$$

1968

From which,

A juniper, 16 ins. diam., bears S. 3° 15' E., 33 lks. dist., mkd. $\frac{1}{2}$ S28 BT.

A juniper, 15 ins. diam., bears N. 23° 30' W., 21 lks. dist., mkd. $\frac{1}{2}$ S21 BT.

Desc. 30 ft. over gently rolling land. Leave dense timber, bears N. and S.

55.00 State Highway No. 95, bears N. 38° 55' E. and S. 38° 55' W.

80.20 The cor. of secs. 20, 21, 28 and 29.

Land, gently rolling benchland.

Soil, sandy.

Timber, dense pinon and juniper E. portion; scattered W. portion.

Undergrowth, sagebrush and grass.

N. 0° 08' E., bet. secs. 20 and 21.

Over rolling benchland through dense timber; asc. 25 ft. over gentle S. slope.

14.70 Top of ascent; thence over nearly level land.

40.00 Point for the $\frac{1}{2}$ sec. cor. of secs. 20 and 21.

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T37S R18E

$$\frac{1}{2} \frac{S20}{S21}$$

1968

From which,

A juniper, 6 ins. diam., bears S. 51° 45' E., 29 lks. dist., mkd. $\frac{1}{2}$ S21 BT.

A juniper, 14 ins. diam., bears S. 68° 15' W., 41 lks. dist., mkd. $\frac{1}{2}$ S20 BT.

Continue over nearly level land.

65.40 S. rim of Armstrong Canyon, bears E. and W.; desc. 215 ft. over broken N. slope.

80.00 Point for the cor. of secs. 16, 17, 20 and 21, from which the witness cor. bears S. 89° 46' E., 0.50 chs. dist., monumented with an iron post, 2 $\frac{1}{2}$ ins. diam., with brass cap mkd.

Survey of the Subdivision, Township 37 South, Range 18 East

CHAINS

T37S R18E

W	S17	S16
C	S20	S21

1957

Land, rolling benchland.
Soil, sandy.
Timber, dense pinon and juniper.
Undergrowth, sagebrush and grass.

From the cor. of secs. 8, 9, 16 and 17, monumented with an iron post, 2½ ins. diam., with brass cap mkd.

T37S R18E

S8	S9
S17	S16

1957

N. 0° 03' W., bet. secs. 8 and 9.

Over rolling benchland through dense timber; asc. 70 ft. over gentle SW. slope.

- 9.30 Small wash, drains S. 40° W.
18.10 Top of ascent slopes W.; thence along W. slope.
34.80 Slope changes; desc. 5 ft. over gentle N. slope.
40.00 Point for the ¼ sec. cor. of secs. 8 and 9.

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, with brass cap mkd.

T37S R18E

¼	S8	S9
---	----	----

1968

From which,

A juniper, 10 ins. diam., bears N. 61° E., 24 lks. dist., mkd. ¼ S9 BT.

A juniper, 8 ins. diam., bears S. 79° 45' W., 10 lks. dist., mkd. ¼ S8 BT.

Desc. 50 ft. over gentle N. slope.

- 55.60 Draw, drains S. 75° W.; asc. 50 ft. over S. slope.

- 80.00 Point for the cor. of secs. 4, 5, 8 and 9.

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, with brass cap mkd.

T37S R18E

S5	S4
S8	S9

1968

Survey of the Subdivision, Township 37 South, Range 18 East

CHAINS

From which,

A pinon, 6 ins. diam., bears N. 80° E., 29 lks. dist., mkd. BT.

A pinon, 10 ins. diam., bears S. 79° 15' E., 29 lks. dist., mkd. S9 BT.

A juniper, 14 ins. diam., bears S. 36° W., 53 lks. dist., mkd. S8 BT.

A juniper, 15 ins. diam., bears N. 85° W., 14 lks. dist., mkd. S5 BT.

Land, rolling benchland.
Soil, sandy.
Timber, dense pinon and juniper.
Undergrowth, sagebrush and grass.

From the cor. of secs. 3, 4, 9 and 10.

N. 89° 41' W., bet. secs. 4 and 9.

Over rolling benchland through dense timber; desc. 60 ft. along general S. slope.

- 4.60 Small wash, drains S.
 - 37.00 Wash, 50 lks. wide, 3 ft. deep, drains irregularly SW.
 - 39.98 Point for the 1/4 sec. cor. of secs. 4 and 9.
- Set an iron post, 30 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd.

T37S R18E

$$\frac{1}{4} \frac{S4}{S9}$$

1968

From which,

A pinon, 8 ins. diam., bears N. 42° W., 26 lks. dist., mkd. 1/4 S4 BT.

- 53.00 Desc. 45 ft. along general S. slope.
- 79.96 Wash, 50 lks. wide, drains N. and S.
- The cor. of secs. 4, 5, 8 and 9.

Land, gently rolling benchland.
Soil, sandy.
Timber, dense pinon and juniper.
Undergrowth, sagebrush and grass.

N. 0° 08' E., bet. secs. 4 and 5.

Over gently rolling land through dense timber; asc. 20 ft. along general W. slope.

Survey of the Subdivision, Township 37 South, Range 18 East

CHAINS

- 3.00 Low spur, slopes W.; desc. 10 ft. along W. slope.
- 8.00 Tuwa Canyon, drains irregularly W.; asc. 15 ft. over S. slope.
- 13.50 Top of ascent, bears E. and W.; thence along W. slope.
- 40.00 Point for the $\frac{1}{2}$ sec. cor. of secs. 4 and 5.
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground, with brass cap mkd.

T37S R18E

 $\frac{1}{2}$
S5|S4

1968

From which,

A juniper, 20 ins. diam., bears N. $76^{\circ} 15' E.$, 89 lks. dist., mkd. $\frac{1}{2}$ S4 BT.

A pinon, 8 ins. diam., bears S. $9^{\circ} W.$, 52 lks. dist., mkd. $\frac{1}{2}$ S5 BT.

Desc. 50 ft. along teneral W. slope.

- 44.00 Draw, drains W.
- 61.30 Oiled road, to Natural Bridges National Monument, bears N. $81^{\circ} 51' W.$ and S. $81^{\circ} 51' E.$
- 77.89 The cor. of secs. 4, 5, 32 and 33, on the N. bdy. of the Tp., and in small draw, drains N. $45^{\circ} W.$, monumented with an iron post, 2 ins. diam., with brass cap mkd.

T36S R18E

S32|S33
S5|S4

T37S

1930

Land, rolling benchland.

Soil, sandy.

Timber, dense pinon and juniper.

Undergrowth, sagebrush and grass.

Retracement of a Portion of the Subdivision,
Township 37 South, Range 18 East

Retracement of the Survey Executed by Fred
R. Chappell and Donald A. Cannon in 1957.

Retracement of a Portion of the Subdivision, Township 37 South, Range 18 East

CHAINS

From the cor. of secs. 5, 6, 31 and 32, on the S. bdy. of the Tp., monumented with an iron post, $2\frac{1}{2}$ ins. diam., with brass cap mkd.

T37S R18E

S31 | S32
S6 | S5

T38S R18E

1957

N. $0^{\circ} 43'$ W., bet. secs. 31 and 32.

Over rolling benchland through dense timber. Topography is the same as recorded in the 1957 survey.

40.00 The $\frac{1}{2}$ sec. cor. of secs. 31 and 32, monumented with an iron post, $2\frac{1}{2}$ ins. diam., with brass cap mkd.

T37S R18E

$\frac{1}{2}$
S31 | S32

1957

80.00 The cor. of secs. 29, 30, 31 and 32, monumented with an iron post, $2\frac{1}{2}$ ins. diam., with brass cap mkd.

T37S R18E

S30 | S29
S31 | S32

1957

This cor. will now function as the cor. of secs. 31 and 32 only, and was remarked to read:

T37S R18E

S30
S31 | S32

1968

1957

Land, rolling benchland.
Soil, sandy.
Timber, dense pinon and juniper.
Undergrowth, sagebrush and grass.

From the cor. of secs. 28, 29, 32 and 33.

N. $89^{\circ} 47'$ W., bet. secs. 29 and 32.

Over rolling benchland through dense timber; desc. 50 ft. over gentle W. slope.

40.00 Point for the S. $\frac{1}{2}$ sec. cor. of sec. 29.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.

Retracement of a Portion of the Subdivision, T. 37 S., R. 18 E.

CHAINS

T37S R18E

 $\frac{1}{4}$ S29

1968

From which,

A pinon, 14 ins. diam., bears N. 31° 30' E., 113 lks. dist., mkd. $\frac{1}{4}$ S29 BT.

40.97

The $\frac{1}{4}$ sec. cor. of secs. 29 and 32, monumented with an iron post, 2 $\frac{1}{2}$ ins. diam., with brass cap mkd.

T37S R18E

 $\frac{1}{4}$ S29
S32

1957

This cor. will now function as the N. $\frac{1}{4}$ sec. cor. of sec. 32 only, and was remarked to read:

T37S R18E

 $\frac{1}{4}$ S32

1968

1957

42.00

Pine Canyon, drains S. 75° W.; thence desc. over gentle SW. slope.

80.00

Point for the cor. of secs. 29 and 30.

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 20 ins. in the ground, with brass cap mkd.

T37S R18E

S30 | S29
S32

1968

From which,

A pinon, 10 ins. diam., bears N. 61° 30' E., 47 lks. dist., mkd. S29 BT.

A juniper, 14 ins. diam., bears N. 31° 15' W., 72 lks. dist., mkd. S30 BT.

From this cor., the cor. of secs. 31 and 32, bears N. 89° 39' W., 0.93 chs. dist., hereinbefore described.

Land, gently rolling benchland.

Soil, sandy.

Timber, dense pinon and juniper.

Undergrowth, sagebrush and grass.

Survey of a Portion of the Subdivision,
Township 37 South, Range 18 East

Survey of a Portion of the Subdivision, T. 37 S., R. 18 E.

CHAINS

From the cor. of secs. 29 and 30.

N. 89° 39' W., along the S. bdy. of sec. 30.

Over rolling benchland through dense timber; desc. 35 ft. over gentle W. slope.

7.65 Hollow, drains S.; asc. 60 ft. over E. slope.

21.95 Old Mormon Trail, on spur, bears N. 14° E. and S. 14° W.; desc. 30 ft. over W. slope.

40.00 Point for the S. $\frac{1}{2}$ sec. cor. of sec. 30.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 12 ins. in the ground to bedrock, and in a mound of stone, $3\frac{1}{2}$ ft. base to top, with brass cap mkd.

T37S R18E

$\frac{1}{2}$ S30

1968

From which,

A pinon, 6 ins. diam., bears North, 14 lks. dist., mkd. $\frac{1}{2}$ S30 BT.

40.93 Point for the N. $\frac{1}{2}$ sec. cor. of sec. 31, at 40.00 chs. of westing from the cor. of secs. 31 and 32.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 12 ins. in the ground to bedrock, and in a mound of stone, $3\frac{1}{2}$ ft. base to top, with brass cap mkd.

T37S R18E

$\frac{1}{2}$ S31

1968

From which,

A pinon, 6 ins. diam., bears S. 5° E., 49 lks. dist., mkd. $\frac{1}{2}$ S31 BT.

Thence by triangulation; desc. about 100 ft. over general SW. slope.

77.80 The cor. of secs. 25, 30, 31 and 36, on the W. bdy. of the Tp., monumented with an iron post, $2\frac{1}{2}$ ins. diam., with brass cap mkd.

T37S
R17E R18E

S25 | S30

S36 | S31

1957

End triangulation.

Survey of the Subdivision, Township 37 South, Range 18 East

CHAINS

Land, rolling benchland.
Soil, sandy.
Timber, dense pinon and juniper.
Undergrowth, sagebrush and grass.

From the cor. of secs. 29 and 30.

N. 0° 03' W., bet. secs. 29 and 30.

Over gently rolling benchland through dense timber; asc. 15 ft. over gentle S. slope.

8.20 Low spur, slopes E.; desc. 10 ft. over gentle N. slope.

16.30 Hollow, drains S. 48° W.; asc. 65 ft. over S. slope.

33.83 Old Mormon Trail, bears N. 50° E. and S. 50° W.

34.46 Spur, slopes E., U.S.G.S. bench mark bears East 91 lks. dist., an iron post with brass cap mkd.

ELEVATION

ABOVE SEA

6549 FEET

1934

Desc. 15 ft. over N. slope.

36.83 State Highway No. 95, bears N. 87° 30' E. and S. 87° 30' W.

40.00 Point for the $\frac{1}{2}$ sec. cor. of secs. 29 and 30.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

T37S R18E

$\frac{1}{2}$
S30 | S29

1968

From which,

A pinon, 8 ins. diam., bears N. 1° 30' E., 33 lks. dist., mkd. $\frac{1}{2}$ S29 BT.

A juniper, 12 ins. diam., bears S. 71° 10' W., 21 lks. dist., mkd. $\frac{1}{2}$ S30 BT.

Thence by triangulation; desc. about 100 ft. over N. slope.

68.00 Draw, drains irregularly W.; asc. about 100 ft. over S. slope.

75.00 Hollow, drains S. 75° W.; asc. along SW. slope.

Survey of the Subdivision, Township 37 South, Range 18 East

CHAINS

80.00 Point for the cor. of secs. 19, 20, 29 and 30. End triangulation.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, $3\frac{1}{2}$ ft base to top, with brass cap mkd.

T37S R18E

S19	S20
S30	S29

1968

From which,

A pinon, 6 ins. diam., bears N. 51° E., 46 lks. dist., mkd. T37S R18E S20 BT.

A pinon, 12 ins. diam., bears S. $61^{\circ} 30'$ E., 49 lks. dist., mkd. T37S R18E S29 BT.

A pinon, 17 ins. diam., bears N. 69° W., 17 lks. dist., mkd. T37S R18E S19 BT.

Land, rolling benchland.

Soil, sandy.

Timber, dense pinon and juniper.

Undergrowth, sagebrush and grass.

From the cor. of secs. 20, 21, 28 and 29.

N. $89^{\circ} 42'$ W., bet. secs. 20 and 29.

Over gently rolling benchland through dense timber; desc. 40 ft. over gentle W. slope.

40.00 Point for the $\frac{1}{2}$ sec. cor. of secs. 20 and 29.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 22 ins. in the ground, with brass cap mkd.

T37S R18E

$\frac{1}{2}$	S20
	S29

1968

From which,

A juniper, 5 ins. diam., bears S. 10° E., 15 lks. dist., mkd. $\frac{1}{2}$ S29 BT.

A pinon, 7 ins. diam., bears N. 87° W., 12 lks. dist., mkd. $\frac{1}{2}$ S20 BT.

Desc. 10 ft. over gentle W. slope.

44.20 Small draw, drains S. 50° W.; asc. 10 ft. over gentle E. slope.

47.20 Low rise, bears N. 20° W. and S.; desc. 60 ft. over W. slope.

Survey of the Subdivision, Township 37 South, Range 18 East

CHAINS					
52.10	Rim of draw, 10 ft. high, bears S. 30° E. and curves W.; thence along S. slope.				
80.00	The cor. of secs. 19, 20, 29 and 30.				
	Land, gently rolling bench land. Soil, sandy. Timber, dense pinon and juniper. Undergrowth, sagebrush and grass.				
	N. 89° 39' W., bet. secs. 19 and 30.				
	Over broken and rolling bench land through dense timber; asc. 15 ft. along S. slope.				
10.20	Top of ascent, slopes S.; thence by triangulation; desc. about 40 ft. over SW. slope.				
40.00	Point for the ¼ sec. cor. of secs. 19 and 30 on line of triangulation.				
	Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground, in a mound of stone 3 ft. base to top, with brass cap mkd.				
	<p style="text-align: center;">T37S R18E</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td style="text-align: center;">¼</td> <td style="text-align: center;">S19</td> </tr> <tr> <td></td> <td style="text-align: center;">S30</td> </tr> </table> <p style="text-align: center;">1968</p>	¼	S19		S30
¼	S19				
	S30				
	From which,				
	A cedar, 10 ins. diam., bears N. 45° 30' E., 28 lks. dist., mkd. S19BT.				
	A cedar, 8 ins. diam., bears S. 51° 15' E., 41 lks. dist., mkd. S30BT.				
65.00	Rim of canyon, bears N. 40° W. and S. 40° E.; desc. about 200 ft. over broken and ledgy SW. slope.				
68.00	Canyon, drains N. 40° W.; asc. about 200 ft. over broken and ledgy NE. slope.				
72.00	Rim of same canyon, bears N. 40° W. and S. 40° E.; asc. about 80 ft. over broken NE. slope.				
77.73	The cor. of secs. 19, 24, 25 and 30, on the W. bdy. of the Tp., monumented with an iron post, 2½ ins. diam., with brass cap mkd.				
	<p style="text-align: center;">T37S</p> <p style="text-align: center;">R17E R18E</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td style="text-align: center;">S24</td> <td style="text-align: center;">S19</td> </tr> <tr> <td style="text-align: center;">S25</td> <td style="text-align: center;">S30</td> </tr> </table> <p style="text-align: center;">1957</p>	S24	S19	S25	S30
S24	S19				
S25	S30				
	End of triangulation.				
	Land, broken and rolling benchland. Soil, sandy. Timber, dense pinon and juniper. Undergrowth, sagebrush and grass.				

Survey of the Subdivision, Township 37 South, Range 18 East

CHAINS

From the cor. of secs. 19, 20, 29 and 30.

N. 0° 03' W., bet. secs. 19 and 20.

Over rolling benchland through dense timber; asc. about 50 ft. over S. slope.

24.00 Spur, slopes W.; desc. about 80 ft. over N. slope; thence by triangulation.

40.00 Point for the $\frac{1}{2}$ sec. cor. of secs. 19 and 20 on line of triangulation.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T37S R18E

$\frac{1}{2}$
S19 | S20

1968

From which,

A juniper, 8 ins. diam., bears N. 50° 40' E., 35 lks. dist., mkd. $\frac{1}{2}$ S20 BT.

A pinon, 6 ins. diam., bears N. 44° 30' W., 28 lks. dist., mkd. $\frac{1}{2}$ S19 BT.

Desc. about 130 ft. over N. slope.

58.00 Draw, drains W.; asc. about 100 ft. over S. slope.

72.00 Spur, slopes W.; desc. about 80 ft. over broken NW. slope. End triangulation.

80.00 Point for the cor. of secs. 17, 18, 19 and 20.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground, with brass cap mkd.

T37S R18E

S18 | S17
S19 | S20

1968

From which,

A juniper, 12 ins. diam., bears N. 16° E., 40 lks. dist., mkd. T37S R18E S17 BT.

A juniper, 20 ins. diam., bears S. 52° E., 60 lks. dist., mkd. T37S R18E S20 BT.

A pinon, 8 ins. diam., bears S. 38° W., 42 lks. dist., mkd. T37S R18E S19 BT.

Land, rolling and broken benchland.

Soil, sandy.

Timber, dense pinon and juniper.

Undergrowth, sagebrush and grass.

From the true point for the cor. of secs. 16, 17, 20 and 21.

N. 89° 46' W., bet. secs. 17 and 20.

Survey of the Subdivision, Township 37 South, Range 18 East

CHAINS

Over broken and ledgy benchland through dense timber. By triangulation; desc. along broken and ledgy bottom of Armstrong Canyon, drains irregularly W.

34.80 Leave canyon, drains N. 80° W.; asc. about 50 ft. over broken and ledgy NE. slope.

39.90 Point for the $\frac{1}{4}$ sec. cor. of secs. 17 and 20 on line of triangulation.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, $3\frac{1}{2}$ ft. base to top, with brass cap mkd.

T37S R18E

$\frac{1}{4}$ $\frac{S17}{S20}$

1968

From which,

A pinon, 10 ins. diam., bears S. 89° W., 61 lks. dist., mkd. $\frac{1}{4}$ S20 BT.

A pinon, 6 ins. diam., bears N. 11° W., 68 lks. dist., mkd. $\frac{1}{4}$ S17 BT.

Asc. about 80 ft. along broken N. slope.

61.80 Spur, slopes N. 60° W.; desc. about 100 ft. over NW. slope. End triangulation.

79.80 The cor. of secs. 17, 18, 19 and 20.

Land, broken benchland.
Soil, sandy, exposed sandstone.
Timber, dense pinon and juniper.
Undergrowth, sagebrush and grass.

N. 89° 40' W., bet. secs. 18 and 19.

Over broken benchland through dense timber. By triangulation; desc. about 100 ft. over broken and ledgy NW. slope.

9.60 Armstrong Canyon, drains S. 75° W. from N. 30° E.; asc. about 100 ft. over broken and ledgy SE. slope.

32.60 Head of draw, drains S. 45° E.; asc. about 50 ft. over NE. slope.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 18 and 19 on line of triangulation.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T37S R18E

$\frac{1}{4}$ $\frac{S18}{S19}$

1968

From which,

Survey of the Subdivision, Township 37 South, Range 18 East

TRAINS

A pinon, 6 ins. diam., bears N. 26° 10' E., 35 lks. dist., mkd. $\frac{1}{2}$ S18 BT.

A juniper, 8 ins. diam., bears S. 6° 20' E., 44 lks. dist., mkd. $\frac{1}{2}$ S19 BT.

Asc. 5 ft. over gentle NE. slope.

45.90 Top of ascent, slopes S. 15° E.; desc. 20 ft. over SW. slope.

52.60 Base of descent, slopes S.; asc. 15 ft. over SE. slope.

63.05 Top of ascent, bears N. and S., end of triangulation; desc. 40 ft. over W. slope.

77.63 The cor. of secs. 13, 18, 19 and 24, on the W. bdy. of the Tp., monumented with an iron post, 2 $\frac{1}{2}$ ins. diam., with brass cap mkd.

T37S
R17E R18E
S13|S18
S24|S19
1957

Land, broken benchland.

Soil, sandy, exposed sandstone.

Timber, dense pinon and juniper.

Undergrowth, sagebrush and grass.

From the cor. of secs. 17, 18, 19 and 20.

N. 0° 03' W., bet. secs. 17 and 18.

Over broken benchland through dense timber. By triangulation; desc. about 100 ft. over NW. slope.

10.00 Armstrong Canyon, drains S. 15° W. from E.; asc. about 150 ft. over broken and ledgy SE. slope.

39.00 Top of ascent, bears E. and W.; desc. 40 ft. over gentle NW. slope. End triangulation.

40.00 Point for the $\frac{1}{2}$ sec. cor. of secs. 17 and 18.

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 3 $\frac{1}{2}$ ft. base to top, with brass cap mkd.

T37S R18E
 $\frac{1}{2}$
S18|S17
1968

From which,

A pinon, 6 ins. diam., bears S. 44° E., 40 lks. dist., mkd. $\frac{1}{2}$ S17 BT.

Survey of the Subdivision, Township 37 South, Range 18 East

CHAINS

A pinon, 6 ins. diam., bears S. 88° W., 60 lks. dist., mkd. $\frac{1}{2}$ S18 BT.

By triangulation; desc. about 100 ft. over NW. slope.

76.00 Draw, drains S. 80° W.; asc. about 80 ft. over S. slope.

80.00 Point for the cor. of secs. 7, 8, 17 and 18 on line of triangulation.

Set an iron post, 30 ins. long, 2½ ins. diam., on solid bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T37S R18E

S7	S8
S18	S17

1968

From which,

A pinon, 6 ins. diam., bears N. 43° 23' E., 27 lks. dist., mkd. T37S R18E S8 BT.

A pinon, 12 ins. diam., bears S. 22° 40' E., 41 lks. dist., mkd. T37S R18E S17 BT.

A pinon, 8 ins. diam., bears S. 27° 50' W., 17 lks. dist., mkd. T37S R18E S18 BT.

A pinon, 14 ins. diam., bears N. 78° 20' W., 58 lks. dist., mkd. T37S R18E S7 BT.

Land, broken benchland.

Soil, sandy, exposed sandstone.

Timber, dense pinon and juniper.

Undergrowth, sagebrush and grass.

From the cor. of secs. 8, 9, 16 and 17.

N. 89° 41' W., bet. secs. 8 and 17.

Over broken benchland through dense timber; desc. 30 ft. over gentle SW. slope.

25.60 Spur, slopes S. 50° W.; desc. 70 ft. over NW. slope.

40.12 Point for the $\frac{1}{4}$ sec. cor. of secs. 8 and 17.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T37S R18E

$\frac{1}{4}$	S8
	S17

1968

From which,

Survey of the Subdivision, Township 37 South, Range 18 East

CHAINS	
	<p>A pinon, 6 ins. diam., bears N. 37° E., 31 lks. dist., mkd. $\frac{1}{2}$ S8 BT.</p> <p>A pinon, 6 ins. diam., bears S. 13° E., 59 lks. dist., mkd. $\frac{1}{2}$ S17 BT.</p> <p>By triangulation; desc. about 100 ft. over NW. slope.</p>
56.00	Draw, drains S. 50° W.; thence along S. slope.
80.24	The cor. of secs. 7, 8, 17 and 18.
	<p>Land, broken benchland. Soil, sandy, exposed sandstone. Timber, dense pinon and juniper. Undergrowth, sagebrush and grass.</p>
	<p>N. 89° 40' W., bet. secs. 7 and 18.</p> <p>Over rolling benchland through dense timber. By triangulation; asc. about 50 ft. over SE. slope.</p>
24.00	Spur, slopes S.; desc. about 60 ft. over gentle W. slope. Continue by triangulation.
40.00	<p>Point for the $\frac{1}{2}$ sec. cor. of secs. 7 and 18 on line of triangulation.</p> <p>Set an iron post, 30 ins. long, 2$\frac{1}{2}$ ins. diam., 8 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.</p>
	<p>T37S R18E</p> $\frac{1}{2} \frac{S7}{S18}$ <p>1968</p>
	Continue by triangulation; desc. about 60 ft. over gentl W. slope.
77.79	The cor. of secs. 7, 12, 13 and 18, on the W. bdy. of the Tp., monumented with an iron post, 2 $\frac{1}{2}$ ins. diam., with brass cap mkd.
	<p>T37S R17E R18E</p> $\frac{S12}{S13} \frac{S7}{S18}$ <p>1957</p>
	<p>End of triangulation. Land, rolling benchland. Soil, sandy. Timber, dense pinon and juniper. Undergrowth, sagebrush and grass.</p>
	From the cor. of secs. 7, 8, 17 and 18.
	N. 0° 03' W., bet. secs. 7 and 8.

Survey of the Subdivision, Township 37 South, Range 18 East

CHAINS

Over rolling benchland through dense timber. By triangulation; asc. about 80 ft. over S. slope.

24.00 Top of ascent, slopes S. 40° W.; desc. about 20 ft. over gentle NW. slope. Continue by triangulation.

40.00 Point for the $\frac{1}{2}$ sec. cor. of secs. 7 and 8.

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd,

T37S R18E

$\frac{1}{2}$
S7|S8

1968

From which,

A pinon, 12 ins. diam., bears S. 5° E., 18 lks. dist., mkd. $\frac{1}{2}$ S8 BT.

A pinon, 6 ins. diam., bears N. 65° 40' W., 58 lks. dist., mkd. $\frac{1}{2}$ S7 BT.

Continue along gently rolling W. slope by triangulation.

80.00 Point for the cor. of secs. 5, 6, 7 and 8 on line of triangulation.

Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground to bedrock, and in a mound of stone, 3½ ft. base to top, with brass cap mkd.

T37S R18E

S6|S5
S7|S8

1968

From which,

A pinon, 8 ins. diam., bears N. 63° E., 29 lks. dist., mkd. T37S R18E S5 BT.

A juniper, 12 ins. diam., bears S. 42° E., 24 lks. dist., mkd. T37S R18E S8 BT.

A pinon, 12 ins. diam., bears S. 54° W., 23 lks. dist., mkd. T37S R18E S7 BT.

A juniper, 12 ins. diam., bears N. 16° W., 35 lks. dist., mkd. T37S R18E S6 BT.

Land, rolling benchland.

Soil, sandy.

Timber, dense pinon and juniper.

Undergrowth, sagebrush and grass.

From the cor. of secs. 4, 5, 8 and 9.

Survey of the Subdivision, Township 37 South, Range 18 East

CHAINS

N. 89° 45' W., bet. secs. 5 and 8.

Over rolling benchland through dense timber; desc. 75 ft. over gentle NW. slope.

40.07 Point for the $\frac{1}{4}$ sec. cor. of secs. 5 and 8.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground, with brass cap mkd.

T37S R18E

$\frac{1}{4} \frac{S5}{S8}$

1968

From which,

A pinon, 6 ins. diam., bears S. 13° E., 37 lks. dist., mkd. $\frac{1}{4}$ S8 BT.

A pinon, 10 ins. diam., bears N. 60° W., 25 lks. dist., mkd. $\frac{1}{4}$ S5 BT.

Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

Desc. 75 ft. over gentle NW. slope.

53.35 Base of descent; asc. 20 ft. along N. slope.

58.55 Small spur, slopes N. 85° W.; desc. 50 ft. over W. slope.

80.14 The cor. of secs. 5, 6, 7 and 8.

Land, rolling benchland.

Soil, sandy.

Timber, dense pinon and juniper.

Undergrowth, sagebrush and grass.

N. 89° 39' W., bet. secs. 6 and 7.

Over rolling benchland through dense timber; desc. 80 ft. over gentle NW. slope.

40.00 Point for $\frac{1}{4}$ cor. of secs. 6 and 7.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 5 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T37S R18E

$\frac{1}{4} \frac{S6}{S7}$

1968

From which,

A pinon, 10 ins. diam., bears N. 32° E., 52 lks. dist., mkd. $\frac{1}{4}$ S6 BT.

A pinon, 7 ins. diam., bears S. 30° E., 68 lks. dist., mkd. $\frac{1}{4}$ S7 BT.

Survey of the Subdivision, Township 37-South, Range 18 East

CHAINS

By triangulation; desc. 140 ft. along a NW. slope.

60.00 Tuwa Canyon, drains SW.; asc. 120 ft. over a broken S. slope.

77.88 The cor. of secs. 1, 6, 7 and 12, on the W. bdy. of the Tp., monumented with an iron post, 2½ ins. diam., with brass cap mkd.

T37S R18E

$\frac{S1|S6}{S12|S7}$

1957

End triangulation.

Land, rolling and broken benchland.

Soil, sandy.

Timber, dense pinon and juniper.

Undergrowth, sagebrush and grass.

From the cor. of secs. 5, 6, 7 and 8.

N. 0° 13' E., bet. secs. 5 and 6.

Over broken benchland through dense timber. By triangulation; desc. about 50 ft. over N. slope.

15.00 Tuwa Canyon, drains S. 80° W.; asc. about 60 ft. over S. slope.

22.00 Spur, slopes W.; desc. about 40 ft. over NW. slope.

31.00 Small draw, drains N. 80° W.; asc. about 40 ft. over SW. slope.

39.00 Spur, slopes W.; desc. about 50 ft. over N. slope.

40.00 Point for the ¼ sec. cor. of secs. 5 and 6.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T37S R18E

$\frac{1}{4}$
S6|S5

1968

From which,

A pinon, 6 ins. diam., bears S. 79° E., 55 lks. dist., mkd. ¼ S5 BT.

A pinon, 6 ins. diam., bears N. 86° W., 68 lks. dist., mkd. ¼ S6 BT.

Survey of the Subdivision, Township 37 South, Range 18 East

CHAINS

- Continue by triangulation; desc. about 50 ft. over N. slope.
- 53.00 Draw, drains W.; asc. about 100 ft. over SW. slope.
- 77.18 The cor. of secs. 5, 6, 31 and 32, on the N. bdy. of the Tp., monumented with an iron post, 2 ins. diam., with brass cap mkd.

T36S R18E

S31	S32
S6	S5

T37S

1930

Land, broken benchland.
 Soil, sandy.
 Timber, dense pinon and juniper.
 Undergrowth, sagebrush and grass.

General Description

Township 37 South, Range 18 East is located about 25 miles west of Blanding, Utah, and near Natural Bridges National Monument. It is rolling and broken benchland covered with a dense growth of juniper and pinon timber, except for a few scattered sagebrush flats and reseeded areas. Undergrowth consists of sagebrush and grass. The area is drained in a southwesterly direction by numerous draws and canyons. Highway 95 enters the township in Section 13, bears northwesterly through Sections 12, 11 and 10; thence southwesterly through Sections 15, 21, 28, 29 and 30. An improved gravel road, bears northerly from Highway 95 through Sections 10, 3 and 2, to Blanding, Utah. The soil is mostly sandy with considerable exposed sandstone. The elevation varies from about 6,200 feet to 7,500 feet above sea level. No water was noted within the township.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS

NAMES	CAPACITY
Phillip J. Leslie	Civil Engineering Aid
Edon G. Larsen	Surveying Aid
E. W. Corbin	Surveying Aid
Craig K. Gardner	Surveying Aid
Michael W. Trentzsch	Surveying Aid

CERTIFICATE OF SURVEY

I, **Craig P. Sylvester**, HEREBY CERTIFY upon honor that,
in pursuance of special instructions bearing date of the 15th day of **April**, 19 **68**,

I have completed the survey of the subdivisional lines and retraced a portion of the subdivisional lines of Township 37 South, Range 18 East

of the **Salt Lake** Meridian, in the State of **Utah**, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

March 25, 1969
(Date)

Craig P. Sylvester
(Cadastral Surveyor)
SUPERVISORY

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

SUBMITTED FOR APPROVAL
Date MAY 23 1969

BUREAU OF LAND MANAGEMENT,
Washington, D. C.

The foregoing field notes of the survey of the completion of the subdivisional lines and the retracement of a portion of the subdivisional lines of Township 37 South, Range 18 East of the Salt Lake Meridian, Utah

executed by **Craig P. Sylvester**, Supervisory Cadastral Surveyor having been critically examined and found correct, are hereby approved.

DEC 1 1969
(Date)

G. J. Joerbeeke
(Chief, Division of Engineering)
Acting Chief, Division of Cadastral Survey

CERTIFICATE OF TRANSCRIPT

~~I CERTIFY That the foregoing transcript of the field notes of the above described surveys in _____, is a true copy of the original field notes.~~

~~_____
(Date)~~

~~_____
(Chief, Division of Engineering)~~

Blank

Page

Blank

Page

ORIGINAL

OFFICE

FIELD NOTES

OF THE
SURVEY OF THE SOUTH BOUNDARY

AND

A PORTION OF THE SUBDIVISIONAL LINES

OF

TOWNSHIP 6 NORTH, RANGE 10 WEST

170 FEB 18 10 00 10

Of the SALT LAKE Meridian,
of UTAH

EXECUTED BY

Woodrow H. Sylvester, Cadastral Surveyor

Gerald W. Hochstrasser, Cadastral Surveyor

and supplemental special instructions dated August 12, 1969
al instructions dated / March 3, 19 61, which provided for the surveys
August 10, 1966
er Group Number 443, approved March 10, 1961, August 11, 1966,
490 and August 15, 1969
ent instructions dated April 25, 19 61.
August 12, 1966 and August 20, 1969

Survey commenced June 7, 19 61

Survey completed September 18, 19 69

INDEX DIAGRAM

Township 6 NORTH, Range 10 WEST

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16 9 8	15 7	14	13
19	20	21	22 7	23	24
30	29 11	28	27 7	26	25 6
31 4	10 32 4	10 33 3	6 34 3	35 2	5 36 2

Township 6 North, Range 10 West

The east boundary was surveyed by Andrew Nelson in 1928. The north boundary, a traverse of the closing lines of Great Salt Lake, was surveyed by Gerald W. Hochstrasser in 1966. The west boundary was surveyed concurrently by Boyd S. Owens in 1961. Corners established in 1961, under this group, now falling in the relicted land area of Great Salt Lake, as a result of the closing of the meander lines of Great Salt Lake under Group No. 490, dated August 10, 1966, have been removed in accordance with supplemental special instructions for Group 443, Utah dated August 12, 1969.

The following field notes are those of the survey of the south boundary and a portion of the subdivisional lines of Township 6 North, Range 10 West, deemed sufficient in extent to facilitate development of the natural resources and mark the boundaries of those sections that normally are considered state school sections. The closing corners on the north boundary of the township were established by Gerald W. Hochstrasser in 1966 and are incorporated in the field notes of this survey in accordance with special instructions contained in Group 490, Utah dated August 10, 1966.

The survey was executed with a W. & L.E. Gurley Solar Transit No. 570628 constructed in accordance with the standard instrumental specifications of the Bureau of Land Management. The instrument was in good condition prior to the beginning of the survey and was maintained in proper adjustment throughout the progress of this survey.

Corners on east-west lines were set on the true latitudinal curve. Lines connecting previously established corners were run by random and true method, but for simplification of the record the random lines are omitted from the field notes. In accordance with the intent of the special instructions, all subdivisional corners established are calculated to be at the position they would occupy if the entire township were subdivided.

Measurements herein contained were made with a narrow steel tape, 8 chains in length graduated every link for the first 100 links and thereafter at intervals of 10 links. The tape was tested by comparison with a one chain standard steel tape and found to be correct. Measurements were made on the slope with the vertical angle of each interval ascertained by a clinometer in good adjustment; horizontal equivalents alone are entered in the field notes. All lines of this survey were run by direct method where the lines were accessible; lines inaccessible were run by traverse or triangulation methods. The details of such traverses or triangulations have been thoroughly checked and verified, and in order to simplify the record the diagrams and reductions are omitted from these field notes.

The direction of the lines of this survey were determined by reference to true meridians established on line by altitude observations on the sun. The lines were carried forward by sustained angulation being supplemented by other numerous altitude observations on the sun taken throughout the progress of the survey.

The southeast corner of the township, a 3" iron post, is also used by the U.S.G.S. as a triangulation station and was computed by them to be at Latitude $41^{\circ} 11' 11.526''$ N., and Longitude $112^{\circ} 55' 33.066''$ W.

Survey of the S. Bdy. of T. 6 N., R. 10 W.

CHAINS

Survey of the South Boundary of
Township 6 North, Range 10 West

Beginning at the cor. of Tps. 5 and 6 N., Rs. 9 and 10 W.,
monumented with a 3 in. iron post, set, mkd. and wit-
nessed as described in the official record.

West, bet. secs. 1 and 36.

Over level desert land through sparse shadscale and
sagebrush.

40.00 Point for the $\frac{1}{2}$ sec. cor. of secs. 1 and 36.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins.
in the ground with brass cap mkd.

T6N R10W

$\frac{1}{2}$ S36
S1
T5N
1961

Raise a mound of earth, $3\frac{1}{2}$ ft. base, 2 ft. high,
N. of cor.

Continue over level desert land.

73.60 E. edge of small lake bed.

50.00 Point for the cor. of secs. 1, 2, 35 and 36.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the
ground, scribed as follows:

T6N S36 on NE.; R10W S1 on SE.; T5N S2 on SW.;
and S35 on NW.; dig pits 18x18x12 ins. in each
sec., 4 ft. dist. Deposit glass at base of post.

Land, level desert.

Soil, sandy clay.

Vegetation, sparse shadscale and sagebrush.

West, bet. secs. 2 and 35.

Over nearly level desert land through sparse shadscale
and sagebrush.

3.20 West edge of small lake bed.

18.60 Enter clay flats; leave undergrowth.

40.00 Point for the $\frac{1}{2}$ sec. cor. of secs. 2 and 35.

Set a fir post, 4x4 ins., 4 ft. long, 38 ins. in the
ground, scribed as follows:

T6N $\frac{1}{2}$ S35 on N.; R10W on W.; and T5N S2 on S.; dig
pits, 18x18x12 ins., E. and W. of cor., 4 ft. dist.
and raise a mound of earth, 4 ft. base, 2 ft. high,
N. of cor. Deposit glass at base of post.

Survey of the S. Bdy. of T. 6 N., R. 10 W.

Continue over nearly level desert land.

Point for the cor. of secs. 2, 3, 34 and 35.

Set a fir post, 4x4 ins., 4 ft. long, 38 ins. in the ground, scribed as follows:

T6N S35 on NE.; R10W S2 on SE.; T5N S3 on SW.; and S34 on NW. Dig pits, 18x18x12 ins. in each sec., 4 ft. dist. Deposit glass at base of post.

Land, nearly level desert, E. portion; level desert, W. portion.

Soil, sandy clay, E. portion; clay W. portion.

Vegetation, sparse shadscale and sagebrush, E. portion; none, W. portion.

West, bet. secs. 3 and 34.

Over level desert land.

Point for the $\frac{1}{2}$ sec. cor. of secs. 3 and 34.

Set a fir post, 4x4 ins., 4 ft. long, 40 ins. in the ground, scribed as follows:

T6N $\frac{1}{2}$ S34 on N.; T5N S3 on S.; and R10W on W. Dig pits, 18x18x12 ins., E. and W. of cor., 4 ft. dist., and raise a mound of earth, 4 ft. base, 2 ft. high, N. of cor. Deposit glass at base of post.

Continue over level desert.

Point for the cor. of secs. 3, 4, 33 and 34.

Set a fir post, 4x4 ins., 4 ft. long, 38 ins. in the ground, scribed as follows:

T6N S34 on NE.; R10W S3 on SE.; T5N S4 on SW., and S33 on NW. Dig pits, 18x18x12 ins. in each sec., 4 ft. dist. Deposit glass at base of post.

Land, level desert.

Soil, clay.

Vegetation, none.

West, bet. secs. 4 and 33.

Over level desert land, with no vegetation.

Point for the $\frac{1}{2}$ sec. cor. of secs. 4 and 33.

Set a fir post, 4x4 ins., 4 ft. long, 40 ins. in the ground, scribed as follows:

T6N $\frac{1}{2}$ S33 on N.; T5N S4 on S.; and R10W on W.; dig pits 18x18x12 ins., E. and W. of cor. 4 ft. dist., and raise a mound of earth, 4 ft. base, 2 ft. high, N. of cor. Deposit glass at base of post.

Survey of the S. Bdy. of T. 6 N., R. 10 W.

CHAINS

Continue over level land.

Point for the cor. of secs. 4, 5, 32 and 33.

Set a fir post, 4x4 ins., 4 ft. long, 38 ins. in the ground, scribed as follows:

T6N S33 on NE.; R10W S4 on SE.; T5N S5 on SW., and S32 on NW. Dig pits 18x18x12 ins. in each sec., 4 ft. dist. Deposit glass at base of post.

Land, level desert.

Soil, sandy clay, with thin alkali crust.

Vegetation, none.

West, bet. secs. 5 and 32.

Over level desert land void of vegetation.

Point for the $\frac{1}{2}$ sec. cor. of secs. 5 and 32.

Set a fir post, 4x4 ins., 4 ft. long, 40 ins. in the ground, scribed as follows:

T6N $\frac{1}{2}$ S32 on N.; T5N S5 on S.; and R10W on W. Dig pits 18x18x12 ins. E. and W. of cor., 4 ft. dist., and raise a mound of earth, 3 $\frac{1}{2}$ ft. base, 2 ft. high, N. of cor.

Continue over level land.

Point for the cor. of secs. 5, 6, 31 and 32.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:

T6N S32 on NE.; R10W S5 on SE.; T5N S6 on SW.; and S31 on NW. face; dig pits 18x18x12 ins. in each sec., 4 ft. dist. Deposit glass at base of post.

Land, level desert.

Soil, sandy clay, saturated with mineral.

Vegetation, none.

West, bet. secs. 6 and 31.

Over level alkali land.

Point for the $\frac{1}{2}$ sec. cor. of secs. 6 and 31.

Set a fir post, 4x4 ins., 4 ft. long, 40 ins. in the ground, scribed as follows:

T6N $\frac{1}{2}$ S31 on N.; T5N S6 on S.; and R10W on W. Dig pits 18x18x12 ins. E. and W. of cor., 4 ft. dist., and raise a mound of earth, 4 ft. base, 2 ft. high, N. of cor. Deposit glass at base of post.

Continue over level land.

Survey of the S. Bdy. of T. 6 N., R. 10 W.

Point for the cor. of Tps. 5 and 6 N., Rs. 10 and 11 W. at a calculated dist. according to the special instructions.

Set a fir post, 4x4 ins., 4 ft. long, 38 ins. in the ground, scribed as follows:

T6N R10W S31 on NE.; T5N R10W S6 on SE.; T5N R11W.; and T6N R11W S36 on NW. Dig pits 18x18x12 ins. N., S., E. and W. of post, 4 ft. dist. Deposit glass at base of post.

Raise a mound of stone, 3½ ft. base, 1½ ft. high, S. of cor.

Land, level.
Soil, clay.
Vegetation, none.

Survey of a Portion of the Subdivision
of Township 6 North, Range 10 West

From the cor. of secs. 1, 2, 35 and 36 on the S. bdy. of the Tp.

N. 0° 01' W., bet. secs. 35 and 36.

Over nearly level land through scattered sagebrush.

Leave rolling sand dune, bears NE. and SW.; enter mud flat.

Point for the ¼ sec. cor. of secs. 35 and 36.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:

T6N on N.; S36 on E.; R10W on S.; and ¼ S35 on W. Dig pits 18x18x12 ins. N. and S. of post, 4 ft. dist., and raise a mound of earth, 3½ ft. base, 1½ ft. high, W. of cor. Deposit glass at base of post.

Continue over level land.

Point for the cor. of secs. 25, 26, 35 and 36.

Set a fir post, 4x4 ins., 4 ft. long, 38 ins. in the ground, scribed as follows:

T6N S25 on NE.; R10W S36 on SE.; S35 on SW.; and S26 on NW. Dig pits 18x18x12 ins. in each sec., 4 ft. dist. Deposit glass at base of post.

Land, level desert.
Soil, sandy clay.
Vegetation, scattered sagebrush.

Survey of a Portion of the Subdivision
of Township 6 North, Range 10 West

CHAINS

- From the cor. of secs. 25, 30, 31 and 36 on the E. bdy. of the Tp., monumented with a 2 in. iron post, set, mkd. and witnessed as described in the official record.
- S. 89° 59' W., bet. secs. 25 and 36.
- Over nearly level desert land through sparse vegetation.
- 28.90 Leave vegetation, bear generally NE. and SW.; enter mud flat.
- 40.02 Point for the $\frac{1}{4}$ sec. cor. of secs. 25 and 36.
- Set a fir post, 4x4 ins., 4 ft. long, 38 ins. in the ground, scribed as follows:
- $\frac{1}{4}$ S25 on N.; T6N on E.; S36 on S.; and R10W on W. Dig pits 18x18x12 ins. E. and W. of cor., 4 ft. dist., and raise a mound of earth, 4 ft. base, 2 ft. high, N. of cor. Deposit glass at base of post.
- Continue over level land.
- 80.04 The cor. of secs. 25, 26, 35 and 36.
- Land, nearly level desert.
Soil, sandy clay, with mineral.
Vegetation, sparse sagebrush and shadscale, E. portion; none W. portion.
-
- From the cor. of secs. 3, 4, 33 and 34 on the S. bdy. of the Tp.
- N. 0° 02' W., bet. secs. 33 and 34.
- Over level alkali land.
- 40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 33 and 34.
- Set a fir post, 4x4 ins., 4 ft. long, 38 ins. in the ground, scribed as follows:
- T6N on N.; S34 on E.; R10W on S.; and $\frac{1}{4}$ S33 on W. Dig pits 18x18x12 ins. N. and S. of cor., 4 ft. dist., and raise a mound of earth, 4 ft. base, 2 ft. high, W. of cor.
- Continue over level land.
- 80.00 Point for the cor. of secs. 27, 28, 33 and 34.
- Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:
- T6N S27 on NE.; R10W S34 on SE.; S33 on SW.; and S28 on NW. Dig pits 18x18x12 ins. in each sec., 4 ft. dist., and deposit glass at base of post.
- Land, level desert.
Soil, clay.
Vegetation, none.

Survey of a Portion of the Subdivision
of Township 6 North, Range 10 West

N. 0° 02' W., bet. secs. 27 and 28.

Over level clay land.

Point for the $\frac{1}{4}$ sec. cor. of secs. 27 and 28.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:

T6N on N.; S27 on E.; R10W on S.; and $\frac{1}{4}$ S28 on W.
Dig pits 18x18x12 ins. N. and S. of cor., 4 ft. dist., and raise a mound of earth 3 $\frac{1}{2}$ ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.

Continue over level land.

Point for the cor. of secs. 21, 22, 27 and 28.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:

T6N S22 on NE.; R10W S27 on SE.; S28 on SW.; and S21 on NW.; dig pits 18x18x12 ins. in each sec., 4 ft. dist. Deposit glass at base of post.

Land, level mud flats.

Soil, alkali clay.

Vegetation, none.

N. 0° 02' W., bet. secs. 21 and 22.

Over level alkali land.

Point for the $\frac{1}{4}$ sec. cor. of secs. 21 and 22.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:

T6N on N.; S22 on E.; R10W on S.; and $\frac{1}{4}$ S21 on W.
Dig pits 18x18x12 ins. N. and S. of cor., 4 ft. dist., and raise a mound of earth, 3 $\frac{1}{2}$ ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.

Continue over level land.

Point for the cor. of secs. 15, 16, 21 and 22.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:

T6N S15 on NE.; R10W S22 on SE.; S21 on SW.; and S16 on NW. Dig pits 18x18x12 ins. in each sec., 4 ft. dist.

Land, level clay flat.

Soil, clay.

Vegetation, none.

N. 0° 02' W., bet. secs. 15 and 16.

Survey of a Portion of the Subdivision
of Township 6 North, Range 10 West

CHAINS

- Over level clay flats.
- 40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 15 and 16.
- Set a fir post, 4x4 ins., 4 ft. long, 38 ins. in the ground, scribed as follows:
- T6N on N.; S15 on E.; R10W on S.; and $\frac{1}{4}$ S16 on W.
Dig pits 18x18x12 ins. N. and S. of cor., 4 ft. dist., and raise a mound of earth, 4 ft. base, 2 ft. high, W. of cor.
- Continue over level land.
- 49.50 Powerline, bears N. 79° 21' W. and S. 79° 21' E.
- 50.40 Centerline of the Southern Pacific Railroad
- 51.00 Southern Pacific Railroad maintenance road, bears N. 79° 21' W. and S. 79° 21' E.
- 51.75 Telephone line, 4 wires, bears N. 79° 21' W. and S. 79° 21' E.
- 52.00 Intersect the closing line of the meanders of the Great Salt Lake.
- Point for the closing cor. of secs. 15 and 16.
- Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. in diam., 22 ins. in the ground and in a collar of stone, with brass cap mkd.
- S16 | S15
C | C
T6N R10W
1966
- Bury broken glass around the iron post.
- The iron post was treated with a special alkali resistant asphalt tar.
- From the above cor., the 5 mile cor. on the closing line of the meanders of the Great Salt Lake, monumented with an iron post, 2 $\frac{1}{2}$ ins. in diam., firmly set and mkd. as described in the official record of the 1966 survey, bears S. 79° 20' 35" E., 16.88 chs. distant.
- Land, flat desert lake bed.
Soil, alkali clay.
Vegetation, none.
-
- From the cor. of secs. 15, 16, 21 and 22.
- West, bet. secs. 16 and 21.
- Over level clay desert.
- 40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 16 and 21.

Survey of a Portion of the Subdivision
of Township 6 North, Range 10 West

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:

$\frac{1}{2}$ S16 on N.; T6N on E.; S21 on S.; and R10W on W. Dig pits 18x18x12 ins. E. and W. of cor., 4 ft. dist., and raise a mound of earth, 3 $\frac{1}{2}$ ft. base, 1 $\frac{1}{2}$ ft. high, N. of cor. Deposit glass at base of post.

Continue over level land.

Point for the cor. of secs. 16, 17, 20 and 21.

Set a fir post, 4x4 ins., 4 ft. long, 38 ins. in the ground, scribed as follows:

T6N S16 on NE.; R10W S21 on SE.; S20 on SW.; and S17 on NW. Dig pits 18x18x12 ins. in each sec., 4 ft. dist. Deposit glass at base of post.

Land, level clay flats.
Soil, alkali saturated clay.
Vegetation, none.

N. 0° 03' W., bet. secs. 16 and 17.

Over level mud flats.

Point for the $\frac{1}{2}$ sec. cor. of secs. 16 and 17.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:

T6N on N.; S16 on E.; R10W on S.; and $\frac{1}{2}$ S17 on W. Dig pits 18x18x12 ins. N. and S. of cor., 4 ft. dist., and raise a mound of earth, 4 ft. base, 2 ft. high, W. of cor. Deposit glass at base of post.

Continue over level land.

Powerline, bears N. 79° 22' W. and S. 79° 22' E.

Centerline of the Southern Pacific Railroad, bears N. 79° 22' W. and S. 79° 22' E.


Southern Pacific Railroad maintenance road, bears N. 79° 22' W. and S. 79° 22' E.

Telephone line, 4 wire, bears N. 79° 22' W. and S. 79° 22' E.

Intersect the closing line of the meanders of the Great Salt Lake.

Point for the closing cor. of secs. 16 and 17.

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. in diam., 20 ins. in the ground and in a collar of stone, with brass cap mkd.



S17 | S16

C C

T6N R10W

1966

Survey of a Portion of the Subdivision
of Township 6 North, Range 10 West

CHAINS

Bury broken glass around the iron post.

The iron post was treated with a special alkali resistant asphalt tar.

From the above cor., the 6 mile cor. on the closing line of the meanders of the Great Salt Lake, monumented with an iron post, $2\frac{1}{2}$ ins. in diam., firmly set and mkd., as described in the official record of the 1966 survey, bears S. $79^{\circ} 20' 35''$ E., 18.30 chs. distant.

Land, flat desert lake bed.
Soil, alkali clay.
Vegetation, none.

From the cor. of secs. 4, 5, 32 and 33 on the S. bdy. of the Tp.

N. $0^{\circ} 03'$ W., bet. secs. 32 and 33.

Over alkali mud flats.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 32 and 33.

Set a fir post 4x4 ins., 5 ft. long, 36 ins. in the ground, scribed as follows:

T6N on N.; S33 on E.; R10W on S.; and $\frac{1}{4}$ S32 on W.
Dig pits 18x18x12 ins. N. and S. of Cor., 4 ft. dist., and raise a mound of earth, $3\frac{1}{2}$ ft. base, 2 ft. high, W. of cor.

Continue over level land.

80.00 Point for the cor. of secs. 28, 29, 32 and 33.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:

T6N S28 on NE.; R10W S33 on SE.; S32 on SW.; and S29 on NW. Dig pits 18x18x12 ins. in each sec., 4 ft. dist.

Land, level clay flats.
Soil, clay, saturated with mineral.
Vegetation, none.

From the cor. of secs. 5, 6, 31 and 32, on the S. bdy. of the Tp.

N. $0^{\circ} 04'$ W., bet. secs. 31 and 32.

Over level alkali clay flats.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 31 and 32.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:

Survey of a Portion of the Subdivision
of Township 6 North, Range 10 West

T6N on N.; S32 on E.; R10W on S.; and $\frac{1}{4}$ S31 on W.
Dig pits 18x18x12 ins. N. and S. of cor., 4 ft.
dist., and raise a mound of earth, 3 ft. base, 2
ft. high, W. of cor.

Continue over level land.

Point for the cor. of secs. 29, 30, 31 and 32.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the
ground, scribed as follows:

T6N S29 on NE.; R10W S32 on SE.; S31 on SW.; S30 on
NW.; 5 notches on E. and 1 notch on S. Dig pits
18x18x12 ins. in each sec., 4 ft. dist.

Land, level clay flats.

Soil, fourth rate clay and alkali.

Vegetation, none.

From the cor. of secs. 28, 29, 32 and 33.

West, bet. secs. 29 and 32.

Over level alkali clay flats.

Point for the $\frac{1}{4}$ sec. cor. of secs. 29 and 32.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the
ground, scribed as follows:

$\frac{1}{4}$ S29 on N.; T6N on E.; S32 on S.; and R10W on W.
Dig pits 18x18x12 ins. E. and W. of cor., 4 ft.
dist. and raise a mound of earth, 3 $\frac{1}{2}$ ft. base, to
1 $\frac{1}{2}$ ft. high, N. of cor.

Continue over level land.

The cor. of secs. 29, 30, 31 and 32.

Land, level alkali clay flats.

Soil, wet, sticky clay.

Vegetation, none.

General Description

The land in Township 6 North, Range 10 West is barren,
alkali and clay desert land on the southwest shoreline
of the Great Salt Lake.

The general elevation is 4,000 feet above sea level.
Vegetation consists of sparse shadscale and sagebrush
in the southeast portion. There is no vegetation in
the remainder of the township. The Great Salt Lake
covers the northern portion of the township.

The Southern Pacific Railroad enters the township in the
southern portion of section 7 and bears approximately S.
79° 22' E., through the township. A telephone line,
powerline and maintenance road parallel the railroad.

The soil is fourth rate alkali clay.

CHAINS

Blank

Page

CERTIFICATE OF SURVEY

200

Woodrow H. Sylvester

, HEREBY

upon honor that, in pursuance of special instructions bearing date of the 3rd day of March, 1961, (I) ~~WEXLER~~ surveyed the south boundary and a portion of the subdivisional lines of T. 6 N., R. 10 W.

Salt Lake Meridian, in the State of Utah, which is mentioned in the foregoing field notes as having been executed by (me), (OS) and under (my) direction; and that said survey has been made in strict conformity with said special instructions Manual of Instructions for the Survey of the Public Lands of the United States, and in the manner described in the foregoing field notes.

March 15, 1969
(Date)

Woodrow H. Sylvester
(Cadastral Surveyor)

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
Washington, D.C.

The foregoing field notes of the survey of the south boundary and a portion of the subdivisional lines of T. 6 N., R. 10 W., Salt Lake Meridian, Utah

by Woodrow H. Sylvester, Cadastral Surveyor

which have been critically examined and found correct, are hereby approved.

(Date)

(Chief, Division of Cadastral Survey)

CERTIFICATE OF TRANSCRIPT

~~That the foregoing transcript of the field notes of the above described surveys in~~
is a true copy of the original field notes.

(Date)

(Chief, Division of Cadastral Survey)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS

NAMES	CAPACITY
G. Bauer	Surveying Aid
y D. Allen	Surveying Aid
D. Carter	Surveying Aid
nnis Badger	Surveying Aid
H. Lay	Surveying Aid
l E. Smith	Surveying Aid
rt M. Campbell	Surveying Aid

CERTIFICATE OF SURVEY

(I) ~~(We)~~, Gerald W. Hochstrasser, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 10th day of August, 1966, (I) ~~(We)~~ established the closing corners on the north boundary of T. 6 N., R. 10 W.

of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by (me), ~~(us)~~ and under (my) ~~(our)~~ direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

October 15, 1969

(Date)

Gerald W. Hochstrasser
(Cadastral Surveyor)

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

AUG 21 1962
OCT 13 1963
OCT 24 1969

BUREAU OF LAND MANAGEMENT
Washington, D.C.

The foregoing field notes of the establishment of closing corners on the north boundary of T. 6 N., R. 10 W., Salt Lake Meridian, Utah

executed by Gerald W. Hochstrasser, Cadastral Surveyor

having been critically examined and found correct, are hereby approved.

NOV 11 1970

(Date)

G. J. Barber
Agent (Chief, Division of Cadastral Survey)

CERTIFICATE OF TRANSCRIPT

~~I CERTIFY That the foregoing transcript of the field notes of the above described surveys in _____, is a true copy of the original field notes.~~

(Date)

(Chief, Division of Cadastral Survey)

Blank

Page

Blank

Page

6
5)
4-679)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
ORIGINAL

223

FIELD NOTES

OF THE

DEPENDENT RESURVEY

OF

A PORTION OF THE NORTH BOUNDARY

AND

A PORTION OF THE SUBDIVISION

OF

TOWNSHIP 7 NORTH, RANGE 10 WEST

RECEIVED
BUREAU OF LAND MANAGEMENT
WASHINGTON, D.C.
JUL 10 1961

Of the SALT LAKE Meridian,

State of UTAH

EXECUTED BY

Boyd S. Owens, Cadastral Surveyor

Special instructions dated March 3, 19 61, which provided for the surveys

under Group Number 443, approved March 10, 1961,

and instructions dated April 25, 19 61.

Survey commenced July 3, 19 61

Survey completed July 11, 19 61

INDEX DIAGRAM

Township 7 NORTH, Range 10 WEST

2					
6	3 5	4	8	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Township 7 North, Range 10 West

A portion of the north boundary and a portion of the subdivision and meander lines was surveyed by Edmund Wilkes and Charles L. Betts in 1886. The following field notes are those of the dependent resurvey of a portion of the north boundary and a portion of the subdivision of Township 7 North, Range 10 West, for the control of the survey of Township 7 North, Range 11 West.

Before restoring the corners, the lines of the original survey were retraced, and diligent search made for any evidence of the original corners, and other calls of the original field note record.

The rules of proportionate measurement were applied to ascertain the position of the lost corners, only after exhausting every reasonable possibility of finding direct evidence of the original corner.

The survey was executed with a W. & L. E. Gurley Solar Transit No. 591189 constructed with the standard instrumental specifications of the Bureau of Land Management. The instrument was in good condition prior to the beginning of the survey and was maintained in proper adjustment throughout the progress of this survey.

Lines connecting previously established corners were run by random and true method, but for simplification of the record the random lines are omitted from the field notes.

Measurements herein contained were made with a narrow steel tape, 8 chains in length, graduated every link for the first 100 links and thereafter at intervals of 10 links. The tape was tested by comparison with a one chain standard steel tape and found to be correct. Measurements were made on the slope with the vertical angle of each interval ascertained by a clinometer in good adjustment; horizontal equivalents alone are entered in the field notes. All lines of this survey were run by direct method.

The direction of the lines of this survey were determined by reference to true meridians established on line by altitude observations on the sun. The lines were carried forward by sustained angulation being supplemented by other numerous altitude observations on the sun taken throughout the progress of the survey.

The geographic position for the corner of secs. 5, 6, 7 and 8, a $2\frac{1}{2}$ inch iron post hereinafter described is at latitude $41^{\circ} 21' 08.20''$ N. and longitude $113^{\circ} 00' 51.27''$ W., as computed from the value of the corner of secs. 5, 6, 31 and 32, Tps. 7 and 8 N., R. 10 W., determined by the U. S. Geological Survey to be in latitude $41^{\circ} 22' 01.104''$ N. and longitude $113^{\circ} 00' 50.775''$ W.

The magnetic declination was read at a number of stations throughout the township and the average of these readings was found to be $16^{\circ} 45'$ East.

Dependent Resurvey of a Portion of the North
Boundary of Township 7 North, Range 10 West

CHAINS

Dependent Resurvey of a Portion of the North
Boundary of Township 7 North, Range 10 West

Reestablishment of the Survey Executed by
Edmund Wilkes and Charles L. Betts in 1886

Note: The following dependent resurvey is for the
control of the survey in Group # 443, Township 7 North,
Range 11 West.

Beginning at the cor. of Tps. 7 and 8 N., Rs. 10 and 11
W., monumented with a fir post, set, mkd. and witnessed
as described in the 1961 field notes of the dependent
resurvey of a portion of the N. bdy. of T. 7 N., R. 11
W.

S. 89° 43' E., bet. secs. 6 and 31.

Over level, barren alkali desert.

15.21 Point for the original meander cor. of secs. 6 and 31
at proportionate dist.; there is no remaining evidence
of the original cor.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the
ground, scribed as follows:

T8N S31 on N.; MC on E.; T7N S6 on S. and R10W on
W. faces. Dig pits, 18x18x12 ins., W. of cor., 3
ft. and 6 ft. dist.

40.55 Point for the original $\frac{1}{2}$ sec. cor. of secs. 6 and 31
at proportionate dist.; there is no remaining evidence
of the original cor.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the
ground, scribed as follows:

T8N $\frac{1}{2}$ S31 on N.; R10W on E. and T7N S6 on S. faces.
Dig pits, 18x18x12 ins., E. and W. of cor., 4 ft.
dist.

63.50 Enter brush land; asc. 75 ft. over gentle W. slope.

80.25 Low ridge, bears N. and S.

81.10 The original cor. of secs. 5, 6, 31 and 32, monumented
with a broken stone, dimly mkd. I accept this as the
original cor. after resurveying the line S. between
secs. 5 and 6.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 22 ins.
in the ground, with brass cap mkd.

T8N R10W

S31	S32
S6	S5

T7N

1961

Dependent Resurvey of a Portion of the North
Boundary of Township 7 North, Range 10 West

Bury piece of broken, mkd. stone alongside iron post, and raise a mound of stone, $3\frac{1}{2}$ ft. base, 3 ft. high, W. of cor.

From this cor., the original meander cor. of secs. 5 and 32, Tps. 7 and 8 N., R. 10 W., monumented with a sandstone, 18x8x6 ins. set 6 ins. in the ground in a small mound of stone, mkd. MC on the east face, bears S. $86^{\circ} 23' 30''$ E., 29.50 chs. dist.

Land, level alkali desert.

Soil, alkali clay, fourth rate.

Vegetation, none W. portion; moderate shadscale and salt brush E. portion.

Dependent Resurvey of a Portion of the
Subdivision of T. 7 North, Range 10 West

Note: The line between secs. 5 and 6 was resurveyed in order to verify the cor. of secs. 5, 6, 31 and 32, Tps. 7 and 8 N., R. 10 W.

From the cor. of secs. 5, 6, 31 and 32 on the N. bdy. of the Tp.

S. $0^{\circ} 27' W.$, bet. secs. 5 and 6.

Over nearly level desert land through moderate shadscale and salt brush.

Desc. 30 ft. along gentle W. slope.

The original $\frac{1}{4}$ sec. cor. of secs. 5 and 6, monumented with a limestone, 4x6x8 ins., set, mkd. and witnessed as described in the official record.

At the cor. point.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 22 ins. in the ground, with brass cap mkd.

T7N R10W

$\frac{1}{4}$

S6|S5

1961

Dig pits, 18x18x12 ins., N. and S. of cor., 4 ft. dist., and bury stone cor. alongside iron post.

S. $0^{\circ} 21' W.$, beginning new measurement.

Over gently rolling W. slope.

The original cor. of secs. 5, 6, 7 and 8, monumented with a limestone, 6x8x10 ins., set, mkd. and witnessed as described in the official record.

Dependent Resurvey of a Portion of the Subdivision
of Township 7 North, Range 10 West

CHAINS

At the cor. point.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 22 ins.
in the ground, with brass cap mkd.

T7N R10W

S6|S5
S7|S8

1961

Dig pits, 18x18x12 ins., in each sec. 4 ft. dist.
and bury stone cor. alongside iron post.

Land, gently rolling desert.

Soil, alkali clay, fourth rate.

Vegetation, moderate shadscale and salt brush.

General Description

The land in the northwest cor. of T. 7 N., R. 10 W. is alkali desert in the Great Salt Lake Desert. The soil is alkali clay, fourth rate, and the vegetation is scattered to moderate shadscale and salt brush. The elevation is about 4,200 feet above sea level. No roads or water are in this portion of the township.

CERTIFICATE OF SURVEY

(I) ~~(We)~~, Boyd S. Owens, HEREBY

CERTIFY upon honor that, in pursuance of special instructions bearing date of the 3rd day of March, 1961, (I) ~~(We)~~ dependently resurveyed a portion of the north boundary and a portion of the subdivision of Township 7 North, Range 10 West

of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by (me), ~~(us)~~ and under (my) ~~(our)~~ direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

October 15, 1969 (Date) Boyd S. Owens (Cadastral Surveyor)

CERTIFICATE OF APPROVAL

RECEIVED
DATE 10 13 1969
OFFICE OF THE
SURVEYOR GENERAL

BUREAU OF LAND MANAGEMENT
Washington, D.C.

The foregoing field notes of the dependent resurvey of a portion of the north boundary and a portion of the subdivision of Township 7 North, Range 10 West, Salt Lake Meridian, Utah

executed by Boyd S. Owens, Cadastral Surveyor

having been critically examined and found correct, are hereby approved.

15 2 1 1970 (Date) [Signature] (Chief, Division of Cadastral Survey)

CERTIFICATE OF TRANSCRIPT

~~I CERTIFY That the foregoing transcript of the field notes of the above described surveys in~~
~~is a true copy of the original field notes.~~

~~(Date) (Chief, Division of Cadastral Survey)~~

Blank

Page

Blank

Page

ORIGINAL
FIELD NOTES

OF THE
SURVEY OF THE SOUTH BOUNDARY

THE EAST BOUNDARY

AND

THE SUBDIVISIONAL LINES

OF

TOWNSHIP 6 NORTH, RANGE 11 WEST

0100

Of the SALT LAKE Meridian,

in the State of UTAH

EXECUTED BY

Boyd S. Owens, Cadastral Surveyor

Gerald W. Hochstrasser, Cadastral Surveyor

Under special instructions dated March 3, 19 61, and supplemental special instructions dated Aug. 12, 1969
August 10, 1966, which provided for the surveys
included under Group Number 443, approved March 10, 1961, August 11, 1966,
490 and August 15, 1969
and assignment instructions dated April 25, 19 61, August 12, 1966, and
August 20, 1969

Survey commenced June 9, 19 61

Survey completed September 18, 19 69

INDEX DIAGRAM

Township 6 NORTH, Range 11 WEST

42	41	33	26			
6	40 5	32 4	25 3	18 2	1	
40	39	31	24	18		
7	38 8	30 9	24 10	17 11	12 12	7
38	37	30	23	17	11	
18	37 17	29 16	22 15	16 14	11 13	7
37	36	29	22	16	11	
19	36 20	28 21	21 22	15 23	10 24	6
35	35	18	21	14	10	
30	35 29	28 28	20 27	14 26	9 25	6
34	34	27	20	13	9	
31	33 32	27 33	19 34	13 35	8 36	5
4	4	3	3	2	2	

Lines surveyed by Boyd S. Owens in 1961 

Lines surveyed by Gerald W. Hochstrasser in 1969 

Township 6 North, Range 11 West

CHAINS

The north boundary was surveyed by Wilkes and Betts in 1886. The west boundary was surveyed by Boyd S. Owens in 1961. The closing lines of the meanders of Great Salt Lake were surveyed by Gerald W. Hochstrasser in 1966. Corners established in 1961, under this group, now falling in the relicted land area of Great Salt Lake, as a result of the closing of the meander lines of Great Salt Lake under Group No. 490, dated August 10, 1966, have been removed in accordance with supplemental special instructions for Group 443, Utah, dated August 12, 1969.

The following field notes are those of the survey of the south boundary, the east boundary and the subdivisional lines of Township 6 North, Range 11 West, deemed necessary to facilitate development of the natural resources. The closing corners on the closing lines of Great Salt Lake were established by Gerald W. Hochstrasser in 1966 and are incorporated in the field notes of this survey in accordance with special instructions contained in Group 490, Utah, dated August 10, 1966.

The survey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1947, and the special instructions dated March 3, 1961 and August 10, 1966.

Corners on east-west lines were set on the true latitudinal curve. Lines connecting previously established corners were run by random and true method, but for simplification of the record the random lines are omitted from the field notes.

Measurements herein contained were made with a narrow steel tape, 8 chains in length, graduated every link for the first 100 links and thereafter at intervals of 10 links. The tape was tested by comparison with a one chain standard steel tape and found to be correct.

Measurements were made on the slope with the vertical angle of each interval ascertained by a clinometer in good adjustment; horizontal equivalents alone are entered in the field notes. All lines of this survey were run by direct method where the lines were accessible; lines inaccessible were run by traverse or triangulation methods. The details of such traverses or triangulations have been thoroughly checked and verified, and in order to simplify the record the diagrams and reductions are omitted from these field notes.

The direction of the lines of this survey were determined by reference to true meridians established on line by altitude observations on the sun. The lines were carried forward by sustained angulation being supplemented by other numerous altitude observations on the sun taken throughout the progress of the survey.

The southeast corner of the township, a 4x4 inch fir post used by the U. S. Geological Survey as a triangulation station determined by them to be at Latitude $41^{\circ} 11' 11.790''$ N. and Longitude $113^{\circ} 02' 26.860''$ W.

The magnetic declination was read at a number of stations throughout the township and the average of these readings was found to be $16^{\circ} 45'$ East.

Survey of the South Boundary of
Township 6 North, Range 11 West

Survey of the S. Bdy. of T. 6 N., R. 11 W.

CHAINS	
	<p>Beginning at the cor. of Tps. 5 and 6 N., Rs. 10 and 11 W., monumented with a 4x4 inch fir post, set, mkd. and witnessed as described in the 1961 field notes of the S. bdy. of T. 6 N., R. 10 W.</p> <p>West, bet. secs. 1 and 36.</p> <p>Over level, barren alkali clay flats.</p>
40.00	<p>Point for the $\frac{1}{4}$ sec. cor. of secs. 1 and 36.</p> <p>Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:</p> <p style="padding-left: 40px;">T6N $\frac{1}{4}$ S36 on N.; R11W on E.; T5N S1 on S.; dig pits, 18x18x12 ins., E. and W. of cor., 4 ft. dist., and raise a mound of earth, 3 ft. base, 2 ft. high, N. of cor.</p> <p>Continue over level land.</p>
80.00	<p>Point for the cor. of secs. 1, 2, 35 and 36.</p> <p>Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:</p> <p style="padding-left: 40px;">T6N S36 on NE.; R11W S1 on SE.; T5N on SW.; and S35 on NW. With 5 notches on W. and 1 notch on E. edges. Dig pits, 18x18x12 ins., 4 ft. dist. in each quadrant.</p> <p>Land, level clay flats. Soil, clay and alkali. Vegetation, none.</p>
	<p>West, bet. secs. 2 and 35.</p> <p>Over level, barren alkali clay flats.</p>
40.00	<p>Point for the $\frac{1}{4}$ sec. cor. of secs. 2 and 35.</p> <p>Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:</p> <p style="padding-left: 40px;">T6N $\frac{1}{4}$ S35 on N.; R11W on E.; T5N S2 on S., dig pits, 18x18x12 ins., E. and W. of cor., 4 ft. dist., and raise a mound of earth, 3 ft. base, 2 ft. high, N. of cor.</p> <p>Continue over level clay flats.</p>
59.00	<p>Leave level land, enter rolling clay hills and sparse shadscale, bears N. and S.</p>
68.20	<p>Crest of low clay ridge, bears N. 30° W. and S. 30° E.</p>
72.90	<p>Road, unimproved, bears N. 20° W. and S. 20° E.</p>
80.00	<p>Point for the cor. of secs. 2, 3, 34 and 35.</p>

Survey of the S. Bdy. of T. 6 N., R. 11 W.

CHAINS

Set a fir post, 4x4 ins., 4 ft. long, 30 ins. in the ground, scribed as follows:

T6N S35 on NE.; R11W S2 on SE.; T5N S3 on SW., and S34 on NW. with 4 notches on W. and 2 on E. edges. Dig pits, 18x18x12 ins., 4 ft. dist. in each quadrant.

Land, level E. portion; rolling W. portion.
Soil, clay, alkali.
Vegetation, none E. portion; sparse shadscale W. portion.

West, bet. secs. 3 and 34.

Over rolling clay hills through sparse shadscale.

8.00 Leave rolling clay hills; enter clay flats, bears N. 30° W. and S. 30° E.

26.70 Road, unimproved, bears NW. and SE.

38.60 Road, unimproved, bears NW. and SE.

40.00 Point for the $\frac{1}{2}$ sec. cor. of secs. 3 and 34.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:

T6N $\frac{1}{2}$ S34 on N.; R11W on E.; T5N S3 on S. Dig pits, 18x18x12 ins., E. and W. of cor., 4 ft. dist., and raise a mound of earth, 3 ft. base, 2 ft. high, N. of cor.

Continue over level clay flats.

80.00 Point for the cor. of secs. 3, 4, 33 and 34.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:

T6N S34 on NE.; R11W S3 on SE.; T5N S4 on SW. and S33 on NW.; with 3 notches on E. and W. edges. Dig pits, 18x18x12 ins., 4 ft. dist., in each quadrant.

Land, level clay flats.
Soil, clay, alkali.
Vegetation, none.

West, bet. secs. 4 and 33.

Over level, barren clay, alkali flats.

21.80 Leave level flats, bears NW. and SE.; enter rolling clay hills.

40.00 Point for the $\frac{1}{2}$ sec. cor. of secs. 4 and 33.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:

Survey of the S. Bdy. of T. 6 N., R. 11 W.

CHAINS

T6N $\frac{1}{2}$ S33 on N.; R11W on E., and T5N S4 on S.
Dig pits, 18x18x12 ins., E. and W. of cor., 4
ft. dist., and raise a mound of earth, 3 ft.
base, 2 ft. high, N. of cor.

Continue over rolling clay hills.

60.00 Crest of low clay ridge, bears N. and S.

68.00 Leave rolling clay hills, enter level alkali flats,
bears N. and SE., with salt brush and hummocks.

80.00 Point for the cor. of secs. 4, 5, 32 and 33.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the
ground, scribed as follows:

T6N S33 on NE.; R11W S4 on SE.; T5N S5 on SW.,
and S32 on NW. with 4 notches on E. and 2 on W.
edges. Dig pits, 18x18x12 ins., 4 ft. dist.,
in each quadrant.

Land, rolling clay hills, E. portion; level clay
flats, W. portion.

Soil, clay and alkali.

Vegetation, sparse shadscale and salt grass.

West, bet. secs. 5 and 32.

Over level alkali clay flats.

40.00 Point for the $\frac{1}{2}$ sec. cor. of secs. 5 and 32.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the
ground, scribed as follows:

T6N $\frac{1}{2}$ S32 on N.; R11W on E.; and T5N S5 on S.
Dig pits, 18x18x12 ins., E. and W. of cor., 4
ft. dist., and raise a mound of earth 3 ft.
base, 2 ft. high, N. of cor.

Continue over level alkali land.

80.00 Point for the cor. of secs. 5, 6, 31 and 32.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the
ground, scribed as follows:

T6N S32 on NE.; R11W S5 on SE.; T5N S6 on SW.,
and S31 on NW. with 5 notches on E. and 1 on W.
edges. Dig pits, 18x18x12 ins., 4 ft. dist.,
in each quadrant.

Land, level desert.

Soil, alkali clay, fourth rate.

Vegetation, sparse salt brush.

West, bet. secs. 6 and 31.

Survey of the S. Bdy. of T. 6 N., R. 11 W.

CHAINS	
40.00	<p>Over level alkali desert, with sparse salt brush.</p> <p>Point for the $\frac{1}{4}$ sec. cor. of secs. 6 and 31.</p> <p>Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:</p> <p style="padding-left: 40px;">T6N $\frac{1}{4}$ S31 on N., R11W on E., and T5N S6 on S. Dig pits, 18x18x12 ins., E. and W. of cor., 4 ft. dist., and raise a mound of earth, 3 ft. base, 2 ft. high, N. of cor.</p> <p>Continue over level land.</p>
79.37	<p>Point for the cor. of Tps. 5 and 6 N., Rs. 11 and 12 W., at a calculated dist. according to the special instructions.</p> <p>Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:</p> <p style="padding-left: 40px;">T6N S31 on NE.; R11W S6 on SE.; T5 N S1 on SW., and R12W S36 on NW.; with 6 notches on N., S., E. and W. edges. Dig pits, 18x18x12 ins., N., S., E. and W. of cor., 4 ft. dist.</p> <p>Land, level clay desert. Soil, alkali clay, fourth rate. Vegetation, sparse small salt brush.</p>
<p>Survey of the East Boundary of Township 6 North, Range 11 West</p>	
40.00	<p>From the cor. of Tps. 5 and 6 N., Rs. 10 and 11 W., monumented with a fir post, set, mkd. and witnessed as described in the 1961 field notes of the S. bdy. of T. 6 N., R. 10 W.</p> <p>North, bet. secs. 31 and 36.</p> <p>Over level clay desert.</p> <p>Point for the $\frac{1}{4}$ sec. cor. of secs. 31 and 36.</p> <p>Set a fir post, 4x4 ins., 4 ft. long, 38 ins. in the ground, scribed as follows:</p> <p style="padding-left: 40px;">T6N on N.; R10W S31 on E., and R11W $\frac{1}{4}$ S36 on W. Dig pits, 18x18x12 ins., N. and S. of cor., 4 ft. dist., and raise a mound of earth, 3$\frac{1}{2}$ ft. base, 1$\frac{1}{2}$ ft. high, W. of cor. Deposit glass at base of post.</p> <p>Continue over level land.</p>
80.00	<p>Point for the cor. of secs. 25, 30, 31 and 36.</p> <p>Set a fir post, 4x4 ins., 4 ft. long, 38 ins. in the ground, scribed as follows:</p>

Survey of the E. Bdy. of T. 6 N., R. 11 W.

CHAINS

T6N R10W S30 on NE.; S31 on SE.; S36 on SW., and R11W S25 on NW. Dig pits, 18x18x12 ins., 4 ft. dist., in each quadrant. Deposit glass at base of post.

Land, level clay flats.
Soil, sticky, sandy clay.
Vegetation, none.

North, bet. secs. 25 and 30.

Over level clay flats.

40.00 Point for the $\frac{1}{2}$ sec. cor. of secs. 25 and 30.

Set a fir post, 4x4 ins., 4 ft. long, 38 ins. in the ground, scribed as follows:

T6N on N.; R10W S30 on E., and R11W $\frac{1}{2}$ S25 on W. Dig pits, 18x18x12 ins., N. and S. of cor., 4 ft. dist., and raise a mound of earth, 3 $\frac{1}{2}$ ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor. Deposit glass at base of post.

Continue over level land.

58.00 Low sand ridge, bears NW. and SE.

72.80 Leave ridge; enter clay flats.

80.00 Point for the cor. of secs. 19, 24, 25 and 30.

Set a fir post, 4x4 ins., 4 ft. long, 38 ins. in the ground, scribed as follows:

T6N R10W S19 on NE.; S30 on SE.; S25 on SW., and R11W S24 on NW. Dig pits, 18x18x12 ins., 4 ft. dist., in each quadrant, and deposit glass at base of post.

Land, nearly level clay flats.
Soil, sandy clay.
Vegetation, sparse shadscale on sandy ridge.

North, bet. secs. 19 and 24.

Over level, barren alkali clay flats.

24.00 Base of low, rolling sand ridge; thence over gently rolling land.

40.00 Point for the $\frac{1}{2}$ sec. cor. of secs. 19 and 24.

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 22 ins. in the ground with brass cap mkd.

T6N
R11W R10W
 $\frac{1}{2}$
S24|S19
1961

Survey of the E. Bdy. of T. 6 N., R. 11 W.

CHAINS

Dig pits, 18x18x12 ins., N. and S. of cor., 4 ft. dist., and raise a mound of earth, 3 ft. base, 2 ft. high, W. of cor.

This cor. located on crest of low sand ridge, bears E. and W.

Continue over rolling land.

44.00 Leave rolling land; enter level alkali clay flats.

80.00 Point for the cor. of secs. 13, 18, 19 and 24.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:

T6N S18 on NE.; R10W S19 on SE.; R11W S24 on SW., and S13 on NW. faces, with 3 notches on N. and S. edges. Dig pits, 18x18x12 ins., 4 ft. dist., in each quadrant.

Land, level clay flats, with low sand ridges in S. portion.

Soil, sandy clay, fourth rate.

Vegetation, sparse shadscale on sand ridges. None on clay flats.

North, bet. secs. 13 and 18.

Over level, barren alkali clay flats.

40.00 Point for the $\frac{1}{2}$ sec. cor. of secs. 13 and 18.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:

T6N on N.; R10W S18 on E., and R11W $\frac{1}{2}$ S13 on W. Dig pits, 18x18x12 ins., N. and S. of cor., 4 ft. dist., and raise a mound of earth, 3 ft. base, 2 ft. high, W. of cor.

Continue over level lands.

80.00 Point for the cor. of secs. 7, 12, 13 and 18.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:

T6N S7 on NE.; R10W S18 on SE.; R11W S13 on SW., and S12 on NW. faces, with 4 notches on S. and 2 on N. edges. Dig pits, 18x18x12 ins., 4 ft. dist., in each quadrant.

Land, level clay flats.

Soil, clay, fourth rate.

Vegetation, none.

North, bet. secs. 7 and 12.


Survey of the E. Bdy. of T. 6 N., R. 11 W.

CHAINS

- Over level, barren alkali clay flats.
- 14.10 S. toe of Southern Pacific Railroad.
- 14.60 Power and telephone line, bears N. 79°24' W. and S. 79°24' E.
- 15.40 Centerline of Southern Pacific Railroad, bears N. 79°24' W. and S. 79°24' E.
- 15.70 Road, railroad maintenance, bears N. 79°24' W. and S. 79°24' E.
- 16.31 N. toe of Southern Pacific Railroad.
- 16.40 Telephone line, 4 wire, bears N. 79°24' W. and S. 79°24' E.
- 16.97 Intersect the closing line of the meanders of the Great Salt Lake.

Point for the closing cor. of secs. 7 and 12.

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground and in a collar of stone, with brass cap mkd.



Bury broken glass around the iron post.

The iron post was treated with a special alkali resistant asphalt tar.

From the above cor., the 8 mile cor. on the closing line of the meanders of the Great Salt Lake, monumented with an iron post, 2½ ins. in diam., firmly set and mkd. as described in the official record of the 1966 survey, bears S. 79° 20' 35" E., 19.92 chs. distant.

Land, level lake bed.
Soil, alkali clay.
Vegetation, none.

Survey of the Subdivisional Lines
of Township 6 N., Range 11 West

From the cor. of secs. 1, 2, 35 and 36, on the S. bdy. of the Tp.

N. 0° 01' W., bet. secs. 35 and 36.

Over level, alkali clay flats.

Point for the ¼ sec. cor. of secs. 35 and 36.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:

Survey of the Subdivisional Lines
of Township 6 N., Range 11 W.

CHAINS	
80.00	<p>T6N on N.; S36 on E.; R11W on S.; and $\frac{1}{2}$ S35 on W. Dig pits, 18x18x12 ins., N. and S. of cor., 4 ft. dist., and raise a mound of earth, 3 ft. base, 2 ft. high, W. of cor. Deposit glass at base of post.</p> <p>Continue over level land.</p> <p>Point for the cor. of secs. 25, 26, 35 and 36.</p> <p>Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:</p> <p>T6N S25 on NE., R11W S36 on SE.; S35 on SW., and S26 on NW. with 1 notch on S. and E. edges. Dig pits, 18x18x12 ins., 4 ft. dist., in each quadrant. Deposit glass at base of post.</p> <p>Land, level clay flats. Soil, alkali clay, fourth rate. Vegetation, none.</p>
40.00	<p>From the cor. of secs. 25, 30, 31 and 36, on the E. bdy. of the Tp.</p> <p>West, bet. secs. 25 and 36.</p> <p>Over level clay flats.</p> <p>Point for the $\frac{1}{2}$ sec. cor. of secs. 25 and 36.</p> <p>Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:</p> <p>$\frac{1}{2}$ S25 on N.; R11W on E.; S36 on S.; and T6N on W. Dig pits 18x18x12 ins., E. and W. of cor., 4 ft. dist., and raise a mound of earth, 3 ft. base, 2 ft. high, N. of cor. Deposit glass at base of post.</p>
80.00	<p>The cor. of secs. 25, 26, 35 and 36.</p> <p>Land, level clay flats. Soil, alkali clay, fourth rate. Vegetation, none.</p>
40.00	<p>N. 0° 01' W., bet. secs. 25 and 26.</p> <p>Over level, barren alkali clay flats.</p> <p>Point for the $\frac{1}{2}$ sec. cor. of secs. 25 and 26.</p> <p>Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:</p> <p>T6N on N.; S25 on E.; R11W on S. and $\frac{1}{2}$ S26 on W. Dig pits, 18x18x12 ins., N. and S. of cor., 4 ft. dist., and raise a mound of earth, 3 ft. base, 2 ft. high, W. of cor.</p>

Survey of the Subdivisional Lines
of Township 6 N., Range 11 W.

CHAINS

80.00 Point for the cor. of secs. 23, 24, 25 and 26.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:

T6N S24 on NE.; R11W S25 on SE.; S26 on SW., and S23 on NW.; with 2 notches on S. and 1 notch on E. edges. Dig pits, 18x18x12 ins., 4 ft. dist., in each quadrant.

Land, level clay flats.
Soil, alkali clay.
Vegetation, none.

From the cor. of secs. 19, 24, 25 and 30, on the E. bdy. of the Tp.

N. 89° 59' W., bet. secs. 24 and 25.

Over level, barren alkali clay flats.

40.00 Point for the $\frac{1}{2}$ sec. cor. secs. 24 and 25.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:

T6N S24 on N.; R11W on E.; S25 on S.; and T6N on W. Dig pits, 18x18x12 ins., E. and W. of cor., 4 ft. dist., and raise a mound of earth, 3 ft. base, 2 ft. high, N. of cor.

80.00 The cor. of secs. 23, 24, 25 and 26.

Land, level clay flats.
Soil, alkali clay.
Vegetation, none.

N. 0° 01' W., bet. secs. 23 and 24.

Over level, alkali clay flats.

40.00 Point for the $\frac{1}{2}$ sec. cor. secs. 23 and 24.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:

T6N on N.; S24 on E.; R11W on S.; and $\frac{1}{2}$ S23 on W. Dig pits, 18x18x12 ins., N. and S. of cor., 4 ft. dist., and raise a mound of earth, 3 ft. base, 2 ft. high, W. of cor.

80.00 Point for the cor. of secs. 13, 14, 23 and 24.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:

T6N S13 on NE.; R11W S24 on SE.; S23 on SW.; and S14 on NW.; with 3 notches on S. and 1 notch on E. edges. Dig pits, 18x18x12 ins., 4 ft. dist., in each quadrant.

Survey of the Subdivisional Lines
of Township 6 N., Range 11 W.

CHAINS		
	<p>Land, level clay flats. Soil, alkali clay. Vegetation, none.</p>	
40.02	<p>From the cor. of secs. 13, 18, 19 and 24, on the E. bdy. of the Tp.</p> <p>N. 89° 58' W., bet. secs. 13 and 24.</p> <p>Over level, alkali clay flats.</p> <p>Point for the $\frac{1}{4}$ sec. cor. secs. 13 and 24.</p> <p>Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:</p> <p>$\frac{1}{4}$ S13 on N.; R11W on E.; S24 on S.; and T6N on W. Dig pits, 18x18x12 ins., E. and W. of cor., 4 ft. dist., and raise a mound of earth, 3 ft. base, 2 ft. high, N. of cor.</p>	
80.04	<p>The cor. of secs. 13, 14, 23 and 24.</p> <p>Land, level clay flats. Soil, alkali clay. Vegetation, none.</p>	
40.00	<p>N. 0° 01' W., bet. secs. 13 and 14.</p> <p>Over level, alkali clay flats.</p> <p>Point for the $\frac{1}{4}$ sec. cor. of secs. 13 and 14.</p> <p>Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:</p> <p>T6N on N.; S13 on E.; R11W on S.; and $\frac{1}{4}$ S14 on W. Dig pits, 18x18x12 ins., N. and S. of cor., 4 ft. dist., and raise a mound of earth, 3 ft. base, 2 ft. high, W. of cor.</p>	
80.00	<p>Point for the cor. of secs. 11, 12, 13 and 14.</p> <p>Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:</p> <p>T6N S12 on NE.; R11W S13 on SE.; S14 on SW.; and S11 on NW.; with 4 notches on S. and 1 notch on E. edges. Dig pits, 18x18x12 ins., 4 ft. dist., in each quadrant.</p> <p>Land, level clay flats. Soil, alkali clay. Vegetation, none.</p>	
	<p>From the cor. of secs. 7, 12, 13 and 18, on the E. bdy. of the Tp.</p> <p>N. 89° 57' W., bet. secs. 12 and 13.</p>	

Survey of the Subdivisional Lines
of Township 6 N., Range 11 W.

CHAINS

Over level alkali clay flats.

40.06 Point for the $\frac{1}{2}$ sec. cor. secs. 12 and 13.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:

$\frac{1}{2}$ S12 on N.; R11W on E.; S13 on S.; and T6N on W.
Dig pits, 18x18x12 ins., E. and W. of cor., 4 ft. dist., and raise a mound of earth, 3 ft. base, 2 ft. high, N. of cor.

80.12 The cor. of secs. 11, 12, 13 and 14.

Land, level clay flats.
Soil, alkali clay.
Vegetation, none.

N. $0^{\circ} 01'$ W., bet. secs. 11 and 12.

Over level alkali clay flats.

28.20 Dike, bears N. $79^{\circ} 24'$ W. and S. $79^{\circ} 24'$ E.

28.70 Ditch, drains S. $79^{\circ} 24'$ E.

29.40 Dike, bears N. $79^{\circ} 24'$ W. and S. $79^{\circ} 24'$ E.

29.52 Power and telephone line, bears N. $79^{\circ} 24'$ W. and S. $79^{\circ} 24'$ E.

30.32 Centerline of Southern Pacific Railroad, bears N. $79^{\circ} 24'$ W. and S. $79^{\circ} 24'$ E.

30.66 Road, railroad maintenance, bears N. $79^{\circ} 24'$ W. and S. $79^{\circ} 24'$ E.

31.32 Telephone line, bears N. $79^{\circ} 24'$ W. and S. $79^{\circ} 24'$ E.

31.92 Intersect the N. segment of the closing lines of the Great Salt Lake.

Point for the closing cor. of secs. 11 and 12.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows: S12 on E.; CC T6N R11W on S.; and S11 on W.

Raise a mound of stone, $2\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, S. of cor.

From this closing cor. the $9\frac{1}{2}$ M.P., bears N. $79^{\circ} 20'$ $35''$ W., 18.50 chains dist.

Land, level clay flats.
Soil, alkali clay.
Vegetation, none.

Survey of the Subdivisional Lines
of Township 6 N., Range 11 W.

CHAINS	
40.00	<p>From the cor. of secs. 2, 3, 34 and 35, on the S. bdy. of the Tp.</p> <p>N. 0° 02' W., bet. secs. 34 and 35.</p> <p>Over nearly level land, through widely scattered shadscale and greasewood; asc. over gentle S. slope.</p> <p>Point for the $\frac{1}{4}$ sec. cor. secs. 34 and 35.</p> <p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground with brass cap mkd.</p> <p style="text-align: center;">T6N R11W $\frac{1}{4}$ S34 S35 1969</p>
80.00	<p>Dig pits, 18x18x12 ins., N. and S. of cor., 4 ft. dist., and raise a mound of earth, 3 ft. base, 2 ft. high, W. of cor.</p> <p>Point for the cor. of secs. 26, 27, 34 and 35.</p> <p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T6N R11W <u>S27 S26</u> S34 S35 1969</p> <p>Dig pits, 18x18x12 ins., 4 ft. dist., in each quadrant.</p>
40.02	<p>From the cor. of secs. 25, 26, 35 and 36.</p> <p>S. 89° 59' W., bet. secs. 26 and 35.</p> <p>Over level alkali clay flats.</p> <p>Point for the $\frac{1}{4}$ sec. cor. secs. 26 and 35.</p> <p>Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:</p> <p style="text-align: center;">$\frac{1}{4}$ S26 on N.; R11W on E.; S35 on S.; and T6N on W.</p> <p>Dig pits, 18x18x12 ins., E. and W. of cor., 4 ft. dist., and raise a mound of earth, 3 ft. base, 2 ft. high N. of cor.</p>
10.40	<p>Enter gently rolling land covered with widely scattered shadscale and greasewood.</p>
80.04	<p>The cor. of secs. 26, 27, 34 and 35.</p>

Survey of the Subdivisional Lines
of Township 6 N., Range 11 W.

CHAINS

Land, level to gently rolling.
Soil, sandy clay.
Vegetation, widely scattered shadscale and greasewood.

N. 0° 02' W., bet. secs. 26 and 27.

Over rolling broken land, through widely scattered
shadscale and greasewood.

40.00 Point for the $\frac{1}{4}$ sec. cor. secs. 26 and 27.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins.
in the ground, with brass cap mkd.

T6N R11W

$\frac{1}{4}$
S27|S26

1969

Dig pits, 18x18x12 ins., N. and S. of cor., 4 ft.
dist., and raise a mound of earth, 3 ft. base, 2
ft. high, W. of cor.

55.00 Begin steep ascent of S. slope.

80.00 Top of spur, projects S. 60° E.

Point for the cor. of secs. 22, 23, 26 and 27.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins.
in the ground, and in a collar of stone, with brass cap
mkd.

T6N R11W

S22|S23
S27|S26

1969

Land, gently rolling to steep broken land.
Soil, rocky sandy clay.
Vegetation, scattered shadscale and greasewood.

From the cor. of secs. 23, 24, 25 and 26.

West, bet. secs. 23 and 26.

Over level alkali clay flats.

40.03 Point for the $\frac{1}{4}$ sec. cor. secs. 23 and 26.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the
ground, scribed as follows:

$\frac{1}{4}$ S23 on N.; R11W on E.; S26 on S.; and T6N on W.
Dig pits, 18x18x12 ins., E. and W. of cor., 4 ft.
dist., raise a mound of earth, 3 ft. base, 2 ft.
high, N. of cor.

Survey of the Subdivisional Lines
of Township 6 N., Range 11 W.

CHAINS	
50.00	Leave flat, begin steep ascent over W. slope through shadscale and greasewood.
74.00	Top of spur, projects SE.
80.06	The cor. of secs. 22, 23, 26 and 27.
	Land, flat to steep broken land. Soil, rocky sandy clay. Vegetation, shadscale and greasewood W. half.
	N. 0° 02' W., bet. secs. 22 and 23.
	Over rolling and broken land, through scattered shadscale and greasewood; desc. N. slope.
13.30	Draw drains, East; asc. SE. slope.
40.00	Top of high spur, projecting S.
	Point for the $\frac{1}{4}$ sec. cor. secs. 22 and 23.
	Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 12 ins. in the ground to solid rock and in a mound of stone, 3 ft. base to top, with brass cap mkd.
	<p style="text-align: center;">T6N R11W $\frac{1}{4}$ S22 S23 1969</p>
	Continue along top of spur.
44.80	Desc. along steep E. slope.
60.70	Asc. along steep E. slope.
76.00	Spur, projects E.; desc. rocky broken ridge.
80.00	Point for the cor. of secs. 14, 15, 22 and 23.
	Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 12 ins. in the ground to solid rock and in a mound of stone, 4 ft. base to top, with brass cap mkd.
	<p style="text-align: center;">T6N R11W S15 S14 S22 S23 1969</p>
	From this cor., the U.S.G.S. triangulation station "Hogup", bears S. 39° 21' 45" W., 8.70 chains dist., which is monumented with a bronze cap cemented in a drill hole flush with the ground and mkd.
	<p style="text-align: center;">ELEV FT</p>
	<p style="text-align: center;">HOGUP</p>
	in Latitude 41° 13' 43.950" N., Longitude 113° 04' 49.664" W.

Survey of the Subdivisional Lines
of Township 6 N., Range 11 W.

CHAINS

Land, rolling and broken.
Soil, rocky sandy clay.
Vegetation, scattered shadscale and greasewood.

- From the cor. of secs. 13, 14, 23 and 24.
S. 89° 59' W., bet. secs. 14 and 23.
Over level alkali clay flats.
- 40.04 Point for the $\frac{1}{2}$ sec. cor. secs. 14 and 23.
Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:
 $\frac{1}{2}$ S14 on N.; R11W on E.; S23 on S.; and T6N on W.
Dig pits, 18x18x12 ins., E. and W. of cor., 4 ft. dist., and raise a mound of earth, 3 ft. base, 2 ft. high, N. of cor.
- 56.10 Leave clay flats, enter shadscale and greasewood; asc. rocky E. slope.
- 80.08 The cor. of secs. 14, 15, 22 and 23.
Land, rolling and broken.
Soil, rocky sandy clay.
Vegetation, shadscale and greasewood.
- N. 0° 02' W., bet. secs. 14 and 15.
Over rolling and broken land, through shadscale and greasewood; desc. N. slope.
- 38.00 Trail road, bears N. 45° W. and S. 45° E.
- 40.00 Point for the $\frac{1}{2}$ sec. cor. of secs. 14 and 15.
Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 20 ins. in the ground, with brass cap mkd.

T6N R11W
 $\frac{1}{2}$
S15|S14
1969
- 61.90 Enter nearly level land.
- 80.00 Point for the cor. of secs. 10, 11, 14 and 15.
Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 18 ins. in the ground, with brass cap mkd.

T6N R11W
S10|S11
S15|S14
1969

Survey of the Subdivisional Lines
of Township 6 N., Range 11 W.

CHAINS	
40.00	<p>Land, rolling to nearly level. Soil, rocky sandy clay. Vegetation, shadscale and greasewood.</p> <hr/> <p>From the cor. of secs. 11, 12, 13 and 14. S. 89° 56' W., bet. secs. 11 and 14. Over level, barren alkali clay flats. Point for the ½ sec. cor. secs. 11 and 14. Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows: ½ S11 on N.; R11W on E.; S14 on S.; T6N on W. Dig pits, 18x18x12 ins., E. and W. of cor., 4 ft. dist., and raise a mound of earth, 3 ft. base, 2 ft. high, W. of cor.</p>
65.30	<p>Leave clay flats, enter rolling lands, and scattered shadscale and greasewood.</p>
80.00	<p>The cor. of secs. 10, 11, 14 and 15. Land, level to rolling. Soil, alkali clay. Vegetation, scattered shadscale and greasewood W. portion.</p> <hr/> <p>N. 0° 02' W., bet. secs. 10 and 11. Over rolling land, through shadscale and greasewood; asc. gentle S. slope.</p>
12.62	<p>Top of ridge, bears N. and S.</p>
40.00	<p>Point for the ½ sec. cor. secs. 10 and 11. Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground to solid rock, and in a mound of stone, 3½ ft. base to top, with brass cap mkd. T6N R11W ½ S10 S11 1969</p>
44.65	<p>Power and telephone line, bears N. 79° 25' W. and S. 79° 25' E.</p>
45.45	<p>Centerline of Southern Pacific Railroad, bears N. 79° 25' W. and S. 79° 25' E.</p>
45.75	<p>Road, railroad maintenance, bears N. 79° 25' W. and S. 79° 25' E.</p>
46.45	<p>Telephone line, bears N. 79° 25' W. and S. 79° 25' E.</p>


Survey of the Subdivisional Lines
of Township 6 N., Range 11 W.

CHAINS

- 55.30 Trail road, bears N. 70° W. and S. 70° E.
- 61.50 Leave rolling land and vegetation; enter barren alkali clay flats.
- 80.00 Point for the cor. of secs. 2, 3, 10 and 11.
- Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:
- T6N S2 on NE.; R11W S11 on SE.; S10 on SW.; and
S3 on NW. Dig pits 18x18x12 ins., 4 ft. dist. in
each quadrant.
- Land, rolling to flat.
Soil, sandy alkali clay.
Vegetation, shadscale and greasewood.
-
- 4.99 East, bet. secs. 2 and 11.
- Over level alkali flats, no vegetation.
- Intersect the closing line of the meanders of the Great Salt Lake.
- Point for the closing cor. of secs. 2 and 11.
- Set an iron post, 30 ins. long, 2½ ins. in diam., 20 ins. in the ground and in a mound of earth, 4 ft. base to top, with brass cap mkd.
- T6N
C S2 /
S11 /
R11W
1966
- Bury broken glass around the iron post.
- The iron post was treated with a special alkali resistant asphalt tar.
- From the above cor., the 10½ mile cor. on the closing line of the meanders of the Great Salt Lake, monumented with an iron post, 2½ ins. in diam., firmly set and mkd. as described in the official record of the 1966 survey, bears S. 1° 55' 59" W., 12.59 chs. distant.
- Land, level lake bed.
Soil, alkali clay.
Vegetation, none.
- From the cor. of secs. 2, 3, 10 and 11.
- N. 0° 02' W., bet. secs. 2 and 3.
- Over level alkali flats.

Survey of the Subdivisional Lines
of Township 6 N., Range 11 W.

CHAINS

- 38.80 Enter moderate salt brush and low hummocks, bears N. 10° E. and S. 10° W.
- 40.00 Point for the $\frac{1}{2}$ sec. cor. of secs. 2 and 3.
Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:
T6N on N.; S2 on E.; R11W on S.; and $\frac{1}{2}$ S3 on W.
Dig pits, 18x18x12 ins., N. and S. of cor., 4 ft. dist., and raise a mound of earth, 3 ft. base, 2 ft. high, W. of cor.
Continue over level land.
- 64.00 Enter dense growth of small salt brush and salt grass.
- 80.00 Point for the 80 $\frac{1}{16}$ sec cor. of secs. 2 and 3.
Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:
T6N on N.; S2 on E.; R11W 80 on S.; and $\frac{1}{16}$ S3 on W. Dig pits, 18x18x12 ins., N. and S. of cor., 4 ft. dist., and raise a mound of earth, 3 ft. base, 2 ft. high, W. of cor.
- 84.60 Leave salt brush and salt grass; enter level alkali flats.
- 90.93 Intersect the closing line of the meanders of the Great Salt Lake.
Point for the closing cor. of secs. 2 and 3.
Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. in diam., 24 ins. in the ground, with brass cap mkd.

- The iron post was treated with a special alkali resistant asphalt tar.
- From the above cor., the 12 mile cor. on the closing line of the meanders of the Great Salt Lake, monumented with an iron post, 2 $\frac{1}{2}$ ins. in diam., firmly set and mkd. as described in the official record of the 1966 survey, bears N. 21° 48' 55" W., 14.96 chs. distant.
- From the cor. of secs. 3, 4, 33 and 34, on the S. bdy. of the Tp.
N. 0° 02' W., bet. secs. 33 and 34.
Over level, barren alkali clay flats.
- 40.00 Point for the $\frac{1}{2}$ sec. cor. of secs. 33 and 34.

Survey of the Subdivisional Lines
of Township 6 N., Range 11 W.

CHAINS

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:

T6N on N.; S34 on E.; R11W on S.; and $\frac{1}{2}$ S33 on W.
Dig pits, 18x18x12 ins., N. and S. of cor., 4 ft. dist., and raise a mound of earth, 3 ft. base, 2 ft. high, W. of cor.

Continue over level land.

47.00 Road, unimproved dirt, bears NW. and SE.

58.50 Leave level clay flats; enter rolling clay hills and sparse shadscale.

80.00 Point for the cor. of secs. 27, 28, 33 and 34.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:

T6N S27 on NE.; R11W S34 on SE.; S33 on SW.; and S28 on NW., with 3 notches on E. and 1 on S. edges.
Dig pits, 18x18x12 ins., 4 ft. dist. in each quadrant.

Land, level clay flats S. portion; rolling clay hills N. portion.

Soil, alkali clay, fourth rate.

Vegetation, none S. portion; sparse shadscale N. portion.

From the corner of secs. 26, 27, 34 and 35.

N. 89° 58' W., bet. secs. 27 and 34.

Over rolling and broken land, through widely scattered shadscale and greasewood.

39.98 Point for the $\frac{1}{2}$ sec. cor. secs. 27 and 34.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:

$\frac{1}{2}$ S27 on N.; R11W on E.; S34 on S.; and T6N on W.
Dig pits, 18x18x12 ins., E. and W. of cor., 4 ft. dist., and raise a mound of earth, 3 ft. base, 2 ft. high, N. of cor.

79.96 The cor. of secs. 27, 28, 33 and 34.

Land, rolling and broken.

Soil, sandy clay.

Vegetation, widely scattered shadscale and greasewood.

N. 0° 02' W., bet. secs. 27 and 28.

Over low, rolling clay hills through sparse shadscale.

40.00 Point for the $\frac{1}{2}$ sec. cor. of secs. 27 and 28.

Survey of the Subvisional Lines
of Township 6 N., Range 11 W.

CHAINS

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:

T6N on N.; S27 on E.; R11W on S. and $\frac{1}{4}$ S28 on W.
Dig pits, 18x18x12 ins., N. and S. of cor., 4 ft. dist., and raise a mound of earth, 3 ft. base, 2 ft. high, W. of cor.

Continue over nearly level land.

56.00 Road, unimproved dirt, bears N. 30° W. and S. 30° E.

80.00 Point for the cor. of secs. 21, 22, 27 and 28.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:

T6N S22 on NE.; R11W S27 on SE.; S28 on SW.; and S21 on NW. Dig pits, 18x18x12 ins., 4 ft. dist. in each quadrant.

Land, rolling, S. portion; nearly level N. portion.
Soil, alkali clay, fourth rate.
Vegetation, sparse shadscale.

From the cor. of secs. 22, 23, 26 and 27:

N. 89° 59' W., bet. secs. 22 and 27.

Over rolling and broken land, through scattered shadscale and greasewood; asc. E. slope.

8.25 Top of Hogup Mountain, bears N. and S.; desc. SW. slope.

31.75 Trail road, bears N. 45° E. and S. 45° W., along top of low ridge.

39.97 Point for the $\frac{1}{4}$ sec. cor. secs. 22 and 27.

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.

T6N R11W

$\frac{1}{4}$ $\frac{S22}{S27}$

1969

50.95 Trail road, bears N. 60° W. and S. 60° E.

79.94 The cor. of secs. 21, 22, 27 and 28.

Land, rolling and broken.
Soil, rocky sandy clay.
Vegetation, scattered shadscale and greasewood.

N. 0° 02' W., bet. secs. 21 and 22.

Over nearly level alkali clay flats.

Survey of the Subdivisional Lines
of Township 6 N., Range 11 W.

CHAINS					
6.60	Road, unimproved dirt, bears E. and W.				
40.00	<p>Point for the $\frac{1}{4}$ sec. cor. of secs. 21 and 22.</p> <p>Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:</p> <p style="padding-left: 40px;">T6N on N.; S22 on E.; R11W on S.; and $\frac{1}{4}$ S21 on W. Dig pits, 18x18x12 ins., N. and S. of cor., 4 ft. dist., and raise a mound of earth, 3 ft. base, 2 ft. high, W. of cor.</p> <p>Continue over nearly level land.</p>				
72.00	Leave level clay flats; thence over rolling SW. slope.				
80.00	<p>Point for the cor. of secs. 15, 16, 21 and 22.</p> <p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins. in the ground and in a mound of stone, 3 ft. base to top, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <p>T6N R11W</p> <table style="margin: auto; border-collapse: collapse;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;"><u>S16</u></td> <td style="padding: 0 5px;"><u>S15</u></td> </tr> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">S21</td> <td style="padding: 0 5px;">S22</td> </tr> </table> <p>1961</p> </div> <p>Land, nearly level desert. Soil, clay, third rate. Vegetation, shadscale.</p>	<u>S16</u>	<u>S15</u>	S21	S22
<u>S16</u>	<u>S15</u>				
S21	S22				
<p>From the cor. of secs. 14, 15, 22 and 23:</p> <p>S. 89° 58' W., bet. secs. 15 and 22.</p> <p>Over rolling and broken land, through scattered shadscale and greasewood; asc. from cor.</p>					
6.00	Top of ridge, bears N. and S.; desc. W. slope.				
40.00	<p>Point for the $\frac{1}{4}$ sec. cor. secs. 15 and 22.</p> <p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center; margin: 10px 0;"> <p>T6N R11W</p> <table style="margin: auto; border-collapse: collapse;"> <tr> <td style="border-right: 1px solid black; padding: 0 5px;">$\frac{1}{4}$ <u>S15</u></td> <td style="padding: 0 5px;"><u>S22</u></td> </tr> </table> <p>1969</p> </div>	$\frac{1}{4}$ <u>S15</u>	<u>S22</u>		
$\frac{1}{4}$ <u>S15</u>	<u>S22</u>				
80.00	<p>The cor. of secs. 15, 16, 21 and 22.</p> <p>Land, rolling and broken. Soil, rocky sandy clay. Vegetation, shadscale and greasewood.</p>				
<p>N. 0° 02' W., bet. secs. 15 and 16.</p> <p>Asc. 125 ft. over rolling SW. slope through moderate shadscale.</p>					
3.60	Wash, 20 lks. wide, 2 ft. deep, drains W. 30 lks; thence SW.				

Survey of the Subdivisional Lines
of Township 6 N., Range 11 W.

CHAINS	
40.00	<p>Point for the $\frac{1}{4}$ sec. cor. of secs. 15 and 16.</p> <p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 8 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.</p> <p style="text-align: center;">T6N R11W $\frac{1}{4}$ S16 S15 1961</p>
	Continue ascent over SW. slope.
54.00	Crest of low ridge, bears NW. and SE.; desc. 50 ft. over NE. slope.
62.00	Base of descent, bears NW. and SE.; thence over level clay flats.
80.00	<p>Point for the cor. of secs. 9, 10, 15 and 16.</p> <p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 22 ins. in the ground with brass cap mkd.</p> <p style="text-align: center;">T6N R11W <u>S9 S10</u> S16 S15 1961</p>
	<p>Dig pits, 18x18x12 ins., 4 ft. dist. in each quadrant.</p> <p>Land, rolling S. portion; level clay flats N. portion. Soil, loamy clay. Vegetation, moderate shadscale brush.</p>
	<p>From the cor. of secs. 10, 11, 14 and 15.</p> <p>West, bet. secs. 10 and 15.</p> <p>Over rolling land through shadscale and greasewood; asc. E. slope.</p>
7.79	Top of small ridge, projects N. 30° E.
39.97	<p>Point for the $\frac{1}{4}$ sec. cor. secs. 10 and 15.</p> <p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T6N R11W $\frac{1}{4}$ <u>S10</u> S15 1969</p>
77.03	Trail road, bears irregularly N. and S.
79.94	<p>The cor. of secs. 9, 10, 15 and 16.</p> <p>Land, rolling and broken. Soil, sandy clay. Vegetation, scattered shadscale and greasewood.</p>

Survey of the Subdivisional Lines
of Township 6 N., Range 11 W.

CHAINS

- N. 0° 02' W., bet. secs. 9 and 10.
Over nearly level clay flats through moderate shadscale.
- 9.70 Road, unimproved dirt, bears NW. and SE.
- 20.00 Edge of bench, bears NW. and SE.; desc. 50 ft. over NE. slope; thence over nearly level clay flats.
- 40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 9 and 10.
Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:
T6N on N.; S10 on E.; R11W on S.; and $\frac{1}{4}$ S9 on W.
Dig pits 18x18x12 ins., N. and S. of cor., 4 ft. dist., and raise a mound of earth, 3 ft. base, 2 ft. high, W. of cor.
Continue over level land.
- 50.70 Ditch, 20 lks. wide, 3 ft. deep, drains S. 79° 26' E.
- 59.60 Powerline, bears N. 79° 26' W. and S. 79° 26' E.
- 60.40 Centerline of Southern Pacific Railroad, bears N. 79° 26' W. and S. 79° 26' E.
- 60.80 Road, gravel, bears N. 79° 26' W. and S. 79° 26' E.
- 61.40 Telephone line, bears N. 79° 26' W. and S. 79° 26' E.
- 80.00 Point for the cor. of secs. 3, 4, 9 and 10.
Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:
T6N S3 on NE.; R11W S10 on SE.; S9 on SW.; and S4 on NW., with 5 notches on S. and 3 on E. edges;
Dig pits, 18x18x12 ins., 4 ft. dist. in each quadrant.
Land, level clay flats.
Soil, alkali clay, fourth rate.
Vegetation, small salt brush.
-
- From the cor. of secs. 2, 3, 10 and 11.
N. 89° 54' W., bet. secs. 3 and 10.
Over level, barren alkali clay flats.
- 11.00 Enter rolling, broken land with shadscale and greasewood asc. E. slope.
- 39.96 Top of ridge, bears N. and S.
Point for the $\frac{1}{4}$ sec. cor. of secs. 3 and 10.

Survey of the Subdivisional Lines
of Township 6 N., Range 11 W.

CHAINS	
	<p>Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T6N R11W $\frac{1}{4} \frac{S3}{S10}$ 1969</p>
79.92	<p>The cor. of secs. 3, 4, 9 and 10.</p> <p>Land, rolling to flat. Soil, sandy clay. Vegetation, shadscale and greasewood.</p>
	<p>N. 0° 02' W., bet. secs. 3 and 4.</p> <p>Over nearly level clay flats through small shadscale brush.</p>
34.70	Dam of small stock pond.
40.00	Point for the ¼ sec. cor. of secs. 3 and 4.
	<p>Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T6N R11W $\frac{1}{4} \frac{S4 S3}{S10}$ 1961</p> <p>Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.</p>
40.20	Wash, 20 lks. wide, 2 ft. deep, drains S. 20° E.; asc. 105 ft. over rolling S. slope.
52.70	Small wash, drains S. 30° E.
80.00	Pt. for the 80 1/16 sec. cor. of secs. 3 and 4.
	<p>Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T6N R11W 1/16 $S4 S3$ 80 1961</p> <p>Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.</p> <p>Asc. 75 ft. over S. slope.</p>

Survey of the Subdivisional Lines
of Township 6 N., Range 11 W.

CHAINS

100.00 Pt. for the 1001/16 sec. cor. of secs. 3 and 4.

Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T6N R11W
1/16
S4|S3
100
1961

103.80 Crest of low ridge, bears NW. and SE.; desc. 90 ft. over NE. slope.

103.80 Jeep road, bears N. 50° W. and S. 50° E.

116.24 Point selected for the witness closing cor. of secs. 3 and 4.

Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd.

T7N R11W
S 33

S4|S3
T6N|R11W
WCC
1961

Raise a mound of stone, 3 ft. base, 1½ ft. high, S. of cor.

116.44 Intersect the S. bdy. of sec. 33, T. 7 N., R. 11 W.

Point for the closing cor. of secs. 3 and 4, falls in gully, drains irregularly NE. and cannot be monumented.

From point of intersection, the S. ¼ sec. cor. of sec. 33, T. 7 N., R. 11 W., bears S. 89° 36' W., 13.42 chs. dist., and is monumented with a 2½ in. iron post, set, mkd. and witnessed as described in the 1961 field notes of the resurvey of the S. bdy. of T. 7 N., R. 11 W.

Land, rolling.
Soil, loamy clay.
Vegetation, shadscale brush.

Point for the N. ¼ sec. cor. sec. 3, Easting 40.00 chs. distant from the closing cor. of secs. 3 and 4.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T7N R11W

¼ S3
T6N
1969

Raise a mound of stone, 2½ ft. base, 1½ ft. high, S. of cor.

Survey of the Subdivisional Lines
of Township 6 N., Range 11 W.

CHAINS	
	<p>From this cor., the cor. of secs. 33 and 34, T. 7 N., R. 11 W., bears S. 89° 32' W., 11.78 chains Dist.</p>
	<p>From the cor. of secs. 4, 5, 32 and 33, on the S. bdy. of the Tp.</p> <p>N. 0° 03' W., bet. secs. 32 and 33.</p> <p>Over nearly level clay flats through scattered salt brush and low hummocks.</p>
40.00	<p>Point for the $\frac{1}{2}$ sec. cor. of secs. 32 and 33.</p> <p>Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:</p> <p style="padding-left: 40px;">T6N on N.; S33 on E.; R11W on S.; and $\frac{1}{2}$ S32 on W. Dig pits, 18x18x12 ins., N. and S. of cor., 4 ft. dist., and raise a mound of earth, 3 ft. base, 2 ft. high, W. of cor.</p> <p>Continue over nearly level land.</p>
80.00	<p>Point for the cor. of secs. 28, 29, 32 and 33.</p> <p>Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:</p> <p style="padding-left: 40px;">T6N S28 on NE.; R11W S33 on SE.; S32 on SW. and S29 on NW. with 4 notches on E. and 1 on S. edges. Dig pits, 18x18x 12 ins., 4 ft. dist., in each quadrant.</p> <p>Land, level clay flats. Soil, alkali clay, fourth rate. Vegetation, scattered small salt brush.</p>
	<p>From the cor. of secs. 27, 28, 33 and 34.</p> <p>West, bet. secs. 28 and 33.</p> <p>Over gently rolling land, through shadscale and greasewood; asc. gentle E. slope.</p>
4.20	<p>Top of ridge; desc. W. slope.</p>
17.20	<p>Enter level, barren alkali clay flats.</p>
40.01	<p>Point for the $\frac{1}{2}$ sec. cor. secs. 28 and 33.</p> <p>Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:</p> <p style="padding-left: 40px;">$\frac{1}{2}$S28 on N.; R11W on E.; S33 on S.; T6N on W. Dig pits, 18x18x12 ins., E. and W. of cor., 4 ft. dist., and raise a mound of earth, 3 ft. base, 2 ft. high, N. of cor.</p>
80.02	<p>The cor. of secs. 28, 29, 32 and 33.</p> <p>Land, gently rolling to level. Soil, sandy clay. Vegetation, shadscale and greasewood.</p>

Survey of the Subdivisional Lines
of Township 6 N., Range 11 W.

CHAINS

N. 0° 03' W., bet. secs. 28 and 29.

Over level, barren alkali clay flats.

40.00 Point for the $\frac{1}{2}$ sec. cor. secs. 28 and 29.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:

T6N on N.; S28 on E.; R11W on S.; $\frac{1}{2}$ S29 on W.
Dig pits, 18x18x12 ins., N. and S. of cor., 4 ft. dist., and raise a mound of earth, 3 ft. base, 2 ft. high, W. of cor.

80.00 Point for the cor. of secs. 20, 21, 28 and 29.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:

T6N S21 on NE.; R11W S28 on SE.; S29 on SW.;
S20 on NW. with 2 notches on S. and 4 notches on E. edges. Dig pits, 18x18x12 ins., 4 ft. dist., in each quadrant.

Land, level alkali clay flats.

Soil, alkali clay.

Vegetation, none.

From the cor. of secs. 21, 22, 27 and 28.

N. 89° 58' W., bet. secs. 21 and 28.

Over rolling and broken land, through shadscale and greasewood; desc. over W. slope of Hogup Mountain.

6.28 Trail road, bears N. 30° W. and S. 10° E.

40.01 Point for the $\frac{1}{2}$ sec. cor. secs. 21 and 28.

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T6N R11W

$\frac{1}{2}$ $\frac{S21}{S28}$

1969

74.20 Enter level, barren alkali flats.

80.02 The cor. of secs. 20, 21, 28 and 29.

Land, rolling and broken.

Soil, rocky sandy clay.

Vegetation, shadscale and greasewood.

N. 0° 03' W., bet. secs. 20 and 21.

Over level, barren alkali clay flats.

40.00 Point for the $\frac{1}{2}$ sec. cor. secs. 20 and 21.

Survey of the Subdivisional Lines
of Township 6 N., Range 11 W.

CHAINS	
	<p>Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:</p> <p style="padding-left: 40px;">T6N on N.; S21 on E.; R11W on S.; $\frac{1}{2}$ S20 on W. Dig pits, 18x18x12 ins., N. and S. of cor., 4 ft. dist., and raise a mound of earth, 3 ft. base, 2 ft. high, W. of cor.</p> <p>Continue over nearby level land.</p>
80.00	<p>Point for the cor. of secs. 16, 17, 20 and 21.</p> <p>Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:</p> <p style="padding-left: 40px;">T6N S16 on NE.; R11W S21 on SE.; S20 on SW.; and S17 on NW. with 3 notches on S. and 4 on E. edges. Dig pits, 18x18x12 ins., 4 ft. dist., in each quadrant.</p> <p>Land, nearly level desert. Soil, alkali clay, third rate. Vegetation, moderate shadscale brush.</p>
	<p>From the cor. of secs. 15, 16, 21 and 22.</p> <p>West, bet. secs. 16 and 21.</p> <p>Desc. 30 ft. over gentle SW. slope through moderate shadscale.</p>
3.90	<p>Wash, 30 lks. wide, 3 ft. deep, drains SW.</p>
8.00	<p>Base of SW. slope, bears NW. and SE.; thence over level clay flats.</p>
28.60	<p>Road, bladed dirt, bears N. 15° W. and S. 15° E.</p>
40.00	<p>Point for the $\frac{1}{2}$ sec. cor. of secs. 16 and 21.</p> <p>Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:</p> <p style="padding-left: 40px;">$\frac{1}{2}$ S16 on N.; T6N on E.; S21 on S.; and R11W on W. Dig pits, 18x18x12 ins., E. and W. of cor., 4 ft. dist., and raise a mound of earth, 3 ft. base, 2 ft. high, N. of cor.</p> <p>Continue over level clay flats.</p>
80.00	<p>The cor. of secs. 16, 17, 20 and 21.</p>
	<p>N. 0° 03' W., bet. secs. 16 and 17.</p> <p>Over nearly level clay flats through moderate shadscale brush.</p>
40.00	<p>Point for the $\frac{1}{2}$ sec. cor. of secs. 16 and 17.</p> <p>Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:</p>

Survey of the Subdivisional Lines
of Township 6 N., Range 11 W.

CHAINS

T6N on N.; S16 on E.; R11W on S.; and $\frac{1}{2}$ S17 on W.
Dig pits, 18x18x12 ins., N. and S. of cor., 4 ft. d'st.
dist., and raise a mound of earth, 3 ft. base, 2 ft.
high, W. of cor.

Continue over nearly level land.

80.00 Point for the cor. of secs. 8, 9, 16 and 17.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the
ground, scribed as follows:

T6N S9 on NE.; R11W S16 on SE.; S17 on SW.; and S8
on NW., with 4 notches on S. and E. edges. Dig
pits, 18x18x12 ins., 4 ft. dist., in each quadrant.

Land, nearly level desert.
Soil, alkali clay, fourth rate.
Vegetation, small shadscale.

From the cor. of secs. 9, 10, 15 and 16.

N. 89° 57' W., bet. secs. 9 and 16.

Desc. 80 ft. over gentle W. slope through moderate
shadscale.

39.99 Point for the $\frac{1}{2}$ sec. cor. of secs. 9 and 16.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins.
in the ground, and in a mound of stone, 3 ft. base to
top, with brass cap mkd.

T6N R11W

$\frac{1}{2}$ $\frac{S9}{S16}$

1961

Continue descent over gentle W. slope.

52.80 Enter level desert land, bears irregularly N. and S.

77.90 Road, bladed dirt, bears N. 15° W. and S. 15° E.

79.98 The cor. of secs. 8, 9, 16 and 17.

Land, gentle W. slope, E. portion; level desert W.
portion.
Soil, alkali clay, fourth rate.
Vegetation, moderate shadscale.

N. 0° 03' W., bet. secs. 8 and 9.

Over level clay flats, through widely scattered shads-
cale.

8.00 Unimproved dirt road, bears N. 10° 30' W. and S. 10°
30' E.

Survey of the Subdivisional Lines
of Township 6 N., Range 11 W.

CHAINS	
40.00	<p>Point for the $\frac{1}{4}$ sec. cor. secs. 8 and 9.</p> <p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T6N R11W $\frac{1}{4}$ S8 S9 1969</p>
	<p>Dig pits, 18x18x12 ins., N. and S. of cor., 4 ft. dist.</p>
43.60	<p>Trail road, bears N. $53^{\circ} 30'$ W. and S. $53^{\circ} 30'$ E.</p>
74.51	<p>Power and telephone line, bears N. $79^{\circ} 26'$ W. and S. $79^{\circ} 26'$ E.</p>
75.31	<p>Centerline of Southern Pacific Railroad, bears N. $79^{\circ} 26'$ W. and S. $79^{\circ} 26'$ E.</p>
75.54	<p>Centerline of side rail, bears N. $79^{\circ} 26'$ W. and S. $79^{\circ} 26'$ E.</p>
75.75	<p>Road, railroad maintenance, bears N. $79^{\circ} 26'$ W. and S. $79^{\circ} 26'$ E.</p>
76.31	<p>Telephone line, bears N. $79^{\circ} 26'$ W. and S. $79^{\circ} 26'$ E.</p>
80.00	<p>Point for the cor. of secs. 4, 5, 8 and 9.</p> <p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins. in the ground, and in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T6N R11W S5 S4 S8 S9 1969</p> <p>Land, level clay flats. Soil, alkali clay. Vegetation, widely scattered shadscale.</p>
<p>From the cor. of secs. 3, 4, 9 and 10.</p>	
<p>S. $89^{\circ} 59'$ W., bet. secs. 4 and 9.</p>	
<p>Over level alkali clay flats, through scattered shadscale.</p>	
40.02	<p>Point for the $\frac{1}{4}$ sec. cor. secs. 4 and 9.</p> <p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T6N R11W $\frac{1}{4}$ $\frac{S4}{S9}$ 1969</p>

Survey of the Subdivisional Lines
of Township 6 N., Range 11 W.

CHAINS

- 71.55 Improved dirt road, bears irregularly SE. and NW.
- 80.04 The cor. of secs. 4, 5, 8 and 9.
Land, level clay flats.
Soil, alkali clay.
Vegetation, scattered shadscale.
- N. 0° 03' W., bet. secs. 4 and 5.
Over nearly level land, through scattered shadscale and greasewood; asc. gentle S. slope.
- 2.70 Improved dirt road, bears N. 79° W. and S. 79° E.
- 26.74 Small rocky spur, projects W.
- 32.76 Small rocky spur, projects W.
- 40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 4 and 5.
Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins. in the ground, and in a collar of stone, with brass cap mkd.
- T6N R11W
 $\frac{1}{4}$
S5|S4
1969
- 43.50 Trail road, bears irregularly N. 39° 30' E. and S. 39° 30' W.
- 80.00 Point for the 80 $\frac{1}{16}$ sec. cor. of secs. 4 and 5.
Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins. in the ground, and in a collar of stone, with brass cap mkd.
- T6N R11W
1/16
80
S5|S4
1969
- 100.00 Point for the 100 $\frac{1}{16}$ sec. cor. of secs. 4 and 5.
Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins. in the ground, and in a collar of stone, with brass cap mkd.
- T6N R11W
1/16
100
S5|S4
1969
- 115.89 Intersect the S. bdy. of sec. 32, T. 7 N., R. 11 W.

Survey of the Subdivisional Lines
of Township 6 N., Range 11 W.

CHAINS

Point for the closing cor. of secs. 4 and 5.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins. in the ground to solid rock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T7N R11W
S32

S5 | S4
C | C
T6N R11W
1969

From this closing cor., the $\frac{1}{2}$ sec. cor. sec. 32, T. 7 N., R. 11 W., bears S. $89^{\circ} 31'$ W., 13.92 chains dist.

Point for the N. $\frac{1}{4}$ sec. cor. of sec. 4 at midpoint bet. the closing cor. of secs. 3 and 4, and the closing cor. of secs. 4 and 5.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground and in a collar of stone, with brass cap mkd.

T7N

 $\frac{1}{4}$ | S4

T6N R11W
1969

From this cor., the cor. of secs. 32 and 33, T. 7 N., R. 11 W., bears S. $89^{\circ} 40'$ W., 14.00 chains dist.

Land, gently rolling.

Soil, rocky sandy clay.

Vegetation, scattered shadscale and greasewood.

From the cor. of secs. 5, 6, 31 and 32, on the S. bdy. of the Tp.

N. $0^{\circ} 04'$ W., bet. secs. 31 and 32.

Over nearly level alkali clay flats through scattered salt brush and low hummocks.

Point for the $\frac{1}{4}$ sec. cor. of secs. 31 and 32.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:

T6N on N.; S32 on E.; R11W on S. and $\frac{1}{4}$ S31 on W.
Dig pits, 18x18x12 ins., N. and S. of cor., 4 ft. dist., and raise a mound of earth, 3 ft. base, 2 ft. high, W. of cor.

Continue over nearly level land.

Point for the cor. of secs. 29, 30, 31 and 32.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:

Survey of the Subdivisional Lines
of Township 6 N., Range 11 W.

CHAINS

T6N S29 on NE.; R11W S32 on SE.; S31 on SW.; and
S30 on NW. with 5 notches on E. and 1 on S. edges.
Dig pits, 18x18x12 ins., 4 ft. dist. in each quad-
rant.

Land, nearly level clay flats.
Soil, alkali clay, fourth rate.
Vegetation, scattered small salt brush.

From the cor. of secs. 28, 29, 32 and 33.

West, bet. secs. 29 and 32.

Over level alkali clay flats through scattered salt
brush and low hummocks.

39.99 Point for the $\frac{1}{4}$ sec. cor. of secs. 29 and 32.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the
ground, scribed as follows:

$\frac{1}{4}$ S29 on N.; T6N on E.; S32 on S.; and R11W on W.
Dig pits, 18x18x12 ins., E. and W. of cor., 4 ft.
dist. and raise a mound of earth, 3 ft. base, 2
ft. high, N. of cor.

Continue over level land.

79.98 The cor. of secs. 29, 30, 31 and 32.

Land, level clay flats.
Soil, alkali clay, fourth rate.
Vegetation, scattered small salt brush.

West, bet. secs. 30 and 31.

Over level, barren alkali clay flats.

89.00 Point for the $\frac{1}{4}$ sec. cor. secs. 30 and 31.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the
ground, scribed as follows:

$\frac{1}{4}$ S30 on N.; R11W on E.; S31 on S.; T6N on W.
Dig pits, 18x18x12 ins., E. and W. of cor.,
4 ft. dist., and raise a mound of earth, 3 ft.
base, 2 ft. high, N. of cor.

99.31 The cor. of secs. 25, 30, 31 and 36, on the W. bdy. of
the Tp, a 4x4 in. fir post, properly mkd. as described
in the official record.

Land, level clay flats.
Soil, alkali clay.
Vegetation, none.

From the cor. of secs. 29, 30, 31 and 32.

Survey of the Subdivisional Lines
of Township 6 N., Range 11 W.

CHAINS	
40.00	<p>N. 0° 04' W., bet. secs. 29 and 30.</p> <p>Over level, barren alkali clay flats.</p> <p>Point for the $\frac{1}{4}$ sec. cor. secs. 29 and 30.</p> <p>Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:</p> <p style="padding-left: 40px;">T6N on N.; S29 on E.; R11W on S.; $\frac{1}{4}$ S30 on W. Dig pits, 18x18x12 ins., N. and S. of cor. 4 ft. dist., and raise a mound of earth, 3 ft. base, 2 ft. high, W. of cor.</p>
80.00	<p>Point for the cor. of secs. 19, 20, 29 and 30.</p> <p>Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:</p> <p style="padding-left: 40px;">T6N S20 on NE.; R11W S29 on SE.; S30 on SW.; and S19 on NW.; with 2 notches on S. and 5 notches on E. edges, 18x18x12 ins., 4 ft. dist., in each quadrant.</p> <p>Land, level clay flats. Soil, alkali clay. Vegetation, none.</p>
40.01	<p>From the cor. of secs. 20, 21, 28 and 29.</p> <p>N. 89° 59' W., bet. secs. 20 and 29.</p> <p>Over level, barren alkali clay flats.</p> <p>Point for the $\frac{1}{4}$ sec. cor. secs. 20 and 29.</p> <p>Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:</p> <p style="padding-left: 40px;">$\frac{1}{4}$ S20 on N.; R11W on E.; S29 on S.; and T6N on W. Dig pits, 18x18x12 ins., E. and W. of cor., 4 ft. dist., and raise a mound of earth, 3 ft. base, 2 ft. high, N. of cor.</p>
80.02	<p>The cor. of secs. 19, 20, 29 and 30.</p> <p>Land, level clay flats. Soil, alkali clay. Vegetation, none.</p>
40.00	<p>N. 89° 58' W., bet. secs. 19 and 30.</p> <p>Over level, barren alkali clay flats.</p> <p>Point for the $\frac{1}{4}$ sec. cor. secs. 19 and 30.</p> <p>Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:</p>

Survey of the Subdivisional Lines
of Township 6 N., Range 11 W.

CHAINS

$\frac{1}{2}$ S19 on N.; R11W on E.; S30 on S.; and T6N on W.
Dig pits, 18x18x12 ins., E. and W. of cor., 4 ft.
dist., and raise a mound of earth, 3 ft. base, 2
ft. high, N. of cor.

- 79.20 The cor. of secs. 19, 24, 25 and 30, on the W. bdy. of
the Tp., a 4x4 in. fir post, properly mkd. as described
in the official record.
Land, level clay flats.
Soil, alkali clay.
Vegetation, none.

From the cor. of secs. 19, 20, 29 and 30.

N. $0^{\circ} 04'$ W., bet. secs. 19 and 20.

Over level, barren alkali clay flats.

- 40.00 Point for the $\frac{1}{2}$ sec. cor. secs. 19 and 20.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the
ground, scribed as follows:

T6N on N.; S20 on E.; R11W on S.; $\frac{1}{2}$ S19 on W.
Dig pits, 18x18x12 ins., N. and S. of cor.,
4 ft. dist., and raise a mound of earth, 3 ft.
base, 2 ft. high, W. of cor.

- 80.00 Point for the cor. of secs. 17, 18, 19 and 20.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the
ground, scribed as follows:

T6N S17 on NE.; R11W S20 on SE.; S19 on SW.; and
S18 on NW.; with 3 notches on S. and 5 notches on
E. edges. Dig pits, 18x18x12 ins., 4 ft. dist.,
in each quadrant.

Land, level clay flats.

Soil, alkali clay.

Vegetation, none.

From the cor. of secs. 16, 17, 20 and 21.

West, bet. secs. 17 and 20.

Over level, barren alkali clay flats.

- 40.02 Point for the $\frac{1}{2}$ sec. cor. secs. 17 and 20.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the
ground, scribed as follows:

$\frac{1}{2}$ S17 on N.; R11W on E.; S20 on S.; and T6N on W.
Dig pits, 18x18x12 ins., E. and W. of cor., 4 ft.
dist., and raise a mound of earth, 3 ft. base, 2
ft. high, N. of cor.

- 80.04 The cor. of secs. 17, 18, 19 and 20.

Land, level clay flats.

Soil, alkali clay.

Survey of the Subdivisional Lines
of Township 6 N., Range 11 W.

CHAINS		
	Vegetation, none.	
40.00	<p>West, bet. secs. 18 and 19.</p> <p>Over level, alkali clay flats, through widely scattered shadscale.</p> <p>Point for the $\frac{1}{4}$ sec. cor. of secs. 18 and 19.</p> <p>Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:</p> <p style="padding-left: 40px;">$\frac{1}{2}$ S18 on N.; R11W on E.; S19 on S.; and T6N on W. Dig pits, 18x18x12 ins., E. and W. of cor., 4 ft. dist., and raise a mound of earth, 3 ft. base, 2 ft. high, N. of cor.</p>	
79.14	<p>The cor. of secs. 13, 18, 19 and 24, on the W. bdy. of the Tp., a 4x4 in. fir post, properly marked as described in the official record.</p> <p>Land, level clay flats.</p> <p>Soil, alkali clay.</p> <p>Vegetation, widely scattered shadscale.</p>	
40.00	<p>From the cor. of secs. 17, 18, 19 and 20.</p> <p>N. 0° 04' W., bet. secs. 17 and 18.</p> <p>Over level, alkali clay flats, through widely scattered shadscale.</p> <p>Point for the $\frac{1}{4}$ sec. cor. secs. 17 and 18.</p> <p>Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:</p> <p style="padding-left: 40px;">T6N on N.; S17 on E.; R11W on S.; and $\frac{1}{2}$ S18 on W. Dig pits, 18x18x12 ins., N. and S. of cor., 4 ft. dist., and raise a mound of earth, 3 ft. base, 2 ft. high, W. of cor.</p>	
80.00	<p>Point for the cor. of secs. 7, 8, 17 and 18.</p> <p>Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:</p> <p style="padding-left: 40px;">T6N S8 on NE.; R11W S17 on SE.; S18 on SW.; and S7 on NW.; with 4 notches on S. and 5 notches on E. edges. Dig pits, 18x18x12 ins., 4 ft. dist., in each quadrant.</p> <p>Land, level clay flats.</p> <p>Soil, alkali clay.</p> <p>Vegetation, widely scattered shadscale.</p>	
	From the cor. of secs. 8, 9, 16 and 17.	

Survey of the Subdivisional Lines
of Township 6 N., Range 11 W.

CHAINS

S. 89° 57' W., bet. secs. 8 and 17.

Over level, alkali clay flats, through widely scattered shadscale.

40.05 Point for the $\frac{1}{4}$ sec. cor. of secs. 8 and 17.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:

$\frac{1}{4}$ S8 on N.; R11W on E.; S17 on S.; and T6N on W.
Dig pits, 18x18x12 ins., E. and W. of cor., 4 ft. dist., and raise a mound of earth, 3 ft. base, 2 ft. high, N. of cor.

80.10 The cor. of secs. 7, 8, 17 and 18.

Land, level clay flats.
Soil, alkali clay.
Vegetation, widely scattered shadscale.

S. 89° 58' W., bet. secs. 7 and 18.

Over level alkali clay flats, through widely scattered shadscale.

40.00 Point for the $\frac{1}{4}$ sec. cor. secs. 7 and 18.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:

$\frac{1}{4}$ S7 on N.; R11W on E.; S18 on S.; and T6N on W.
Dig pits, 18x18x12 ins., E. and W. of cor., 4 ft. dist., and raise a mound of earth, 3 ft. base, 2 ft. high, N. of cor.

79.07 The cor. of secs. 7, 12, 13 and 18, on the W. bdy. of the Tp., a 4x4 in. fir post, properly mkd. as described in the official record.
Land, level clay flats.
Soil, alkali clay.
Vegetation, widely scattered shadscale.

From the cor. of secs. 7, 8, 17 and 18.

N. 0° 04' W., bet. secs. 7 and 8.

Over level alkali clay flats, through widely scattered shadscale.

40.00 Point for the $\frac{1}{4}$ sec. cor. secs. 7 and 8.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:

T6N on N.; S8 on E.; R11W on S.; and $\frac{1}{4}$ S7 on W.
Dig pits, 18x18x12 ins., N. and S. of cor. 4 ft. dist., and raise a mound of earth, 3 ft. base, 2 ft. high, W. of cor.

Survey of the Subdivisional Lines
of Township 6 N., Range 11 W.

CHAINS		
80.00	<p>Point for the cor. of secs. 5, 6, 7 and 8.</p> <p>Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:</p> <p style="padding-left: 40px;">T6N S5 on NE.; R11W S8 on SE.; S7 on SW.; and S6 on NW.; with 5 notches on S. and 5 notches on E. edges. Dig pits, 18x18x12 ins., 4 ft. dist., in each quadrant.</p> <p>Land, level clay flats. Soil, alkali clay. Vegetation, widely scattered shadscale.</p>	
17.12	<p>From the cor. of secs. 4, 5, 8 and 9.</p> <p>S. 89° 59' W., bet. secs. 5 and 8.</p> <p>Over gently rolling land, through shadscale and greasewood.</p>	
18.52	<p>Improved dirt road, bears N. 20° W. and S. 20° E.</p>	
19.00	<p>Telephone line, bears N. 79° 27' W. and S. 79° 27' E.</p>	
19.00	<p>Road, railroad maintenance, bears N. 79° 27' W. and S. 79° 27' E.</p>	
23.42	<p>Centerline of side rail, bears N. 79° 27' W. and S. 79° 27' E.</p>	
24.72	<p>Centerline of Southern Pacific Railroad, bears N. 79° 27' W. and S. 79° 27' E.</p>	
29.10	<p>Power and telephone line, bears N. 79° 27' W. and S. 79° 27' E.</p>	
40.06	<p>Point for the ½ sec. cor. secs. 5 and 8.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T6N R11W $\frac{1}{2} \frac{S5}{S8}$ 1969</p> <p>Dig pits, 18x18x12 ins., E. and W. of cor., 4 ft. dist., and raise a mound of earth, 3 ft. base, 2 ft. high, N. of cor.</p>	
80.12	<p>The cor. of secs. 5, 6, 7 and 8.</p> <p>Land, gently rolling land. Soil, sandy clay. Vegetation, shadscale and greasewood.</p>	

Survey of the Subdivisional Lines
of Township 6 N., Range 11 W.

CHAINS

- S. 89° 58' W., bet. secs. 6 and 7.
- Over gently rolling land, through shadscale and greasewood.
- 40.00 Point for the $\frac{1}{2}$ sec. cor. secs. 6 and 7.
- Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:
- $\frac{1}{2}$ S6 on N.; R11W on E.; S7 on S.; and T6N on W.
Dig pits, 18x18x12 ins., E. and W. of cor. 4 ft. dist., and raise a mound of earth, 3 ft. base, 2 ft. high, N. of cor.
- 79.07 The cor. of secs. 1, 6, 7 and 12, on the W. bdy. of the Tp.
- Land, gently rolling land.
Soil, sandy clay.
Vegetation, shadscale and greasewood.
-
- From the cor. of secs. 5, 6, 7 and 8.
- N. 0° 04' W., bet. secs. 5 and 6.
- Over gently rolling land, through shadscale and greasewood.
- 9.53 Power and telephone line, bears N. 79° 27' W. and S. 79° 27' E.
- 10.33 Centerline of Southern Pacific Railroad, bears N. 79° 27' W. and S. 79° 27' E.
- 10.56 Centerline of side rail, bears N. 79° 21' W. and S. 79° 27' E.
- 10.77 Road, railroad maintenance, bears N. 79° 27' W. and S. 79° 27' E.
- 11.33 Telephone line, bears N. 79° 27' W. and S. 79° 27' E.
- 40.00 Point for the $\frac{1}{2}$ sec. cor. secs. 5 and 6.
- Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.
- T6N R11W
 $\frac{1}{2}$
S6 | S5
1969
- Set a fir post, 4x4 ins., 4 ft. long, 2 ft. in the ground, alongside iron post.
- Deposit broken glass in bottom of hole.
- Raise a mound of stone, 2 $\frac{1}{2}$ ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.

Survey of the Subdivisional Lines
of Township 6 N., Range 11 W.

CHAINS

80.00 Point for the 80 1/16 sec. cor. of secs. 5 and 6.
Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground and in a collar of stone, with brass cap mkd.

T6N R11W
1/16
80
S6 | S5
1969

100.00 Point for the 100 1/16 sec. cor. of secs. 5 and 6.
Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground and in a collar of stone, with brass cap mkd.

T6N R11W
1/16
100
S6 | S5
1969

115.25 Intersect the S. bdy. of sec. 31, T. 7 N., R. 11 W.

Point for the closing cor. of secs. 5 and 6.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T7N R11W
S31
S6 | S5
C C
T6N R11W
1969

Raise a mound of stone, 2½ ft. base, 1½ ft. high, S. of cor.

From this cor., the ½ sec. cor. sec. 31, T. 7 N., R. 11 W., bears S. 89° 42' W., 14.28 chains dist.

Point for the N. ½ sec. cor. of sec. 5 at midpoint, bet. the closing cor. of secs. 4 and 5, and the closing cor. of secs. 5 and 6.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

½ S5
T6N R11W
1969

From this cor., the cor. of secs. 31 and 32, bears S. 89° 33' W., 14.03 chains dist.

Survey of the Subdivisional Lines
of Township 6 N., Range 11 W.

CHAINS

Point for the N. $\frac{1}{4}$ sec. cor. sec. 6, Westing 40.00 chains dist., from the closing cor. of secs. 5 and 6.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins. in the ground, with brass cap mkd.

T7N

$\frac{1}{4}$ S6
T6N R11W
1969

From this cor., the cor. of Tps. 7 N., Rs. 11 and 12 W., bears S. $89^{\circ} 47'$ W., 14.61 chains dist.

Land, gently rolling.

Soil, sandy clay.

Vegetation, shadscale and greasewood.

General Description

The land in Township 6 North, Range 11 West, is alkali clay desert land, with some low sandy ridges. The township lies in the Great Salt Lake Desert about 12 miles west of Lakeside. The soil is alkali clay, fourth rate. The area is drained in an easterly direction. Vegetation is scattered salt brush, salt grass and shadscale with much of the township void of vegetation.

The Southern Pacific Railroad and its maintenance roads enter the township in the southern portion of section 6 and bears about S. $79^{\circ} 24'$ E., through the township. There are a few bladed dirt roads in sections 3, 4, 7, 9, 10, 16, 21, 22, 27, 28, 33, 34 and 35, all bearing generally NW. and SE. There are no permanent sources of water in the township. The elevation is about 4,200 feet above sea level.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS

NAMES	CAPACITY
LaVern Griffin	Surveying Technician
Dan Coleman	Surveying Aid
Douglas McInelly	Surveying Aid
Arnold Mann	Surveying Aid
Anthony Coombs	Surveying Aid
Paul E. Mahler	Surveying Aid

CERTIFICATE OF SURVEY

(I) (~~WE~~), Boyd S. Owens, HEREBY

CERTIFY upon honor that, in pursuance of special instructions bearing date of the 3rd day of March, 1961, (I) (~~WE~~) surveyed the south boundary, the east boundary and a portion of the subdivisional lines of T. 6 N.; R. 11 W.

of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by (me), (us) and under (my) (our) direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

(Date) (Cadastral Surveyor)
October 15, 1969 (Date) Boyd S Owens (Cadastral Surveyor)

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
Washington, D.C.

The foregoing field notes of the survey of the south boundary, the east boundary and a portion of the subdivisional lines of T. 6 N., R. 11 W., Salt Lake Meridian, Utah

executed by Boyd S. Owens, Cadastral Surveyor
having been critically examined and found correct, are hereby approved.

(Date) (Chief, Division of Cadastral Survey)

CERTIFICATE OF TRANSCRIPT


I CERTIFY That the foregoing transcript of the field notes of the above-described surveys in, is a true copy of the original field notes.

(Date) (Chief, Division of Cadastral Survey)

CERTIFICATE OF SURVEY

(I) ~~(ME)~~, Gerald W. Hochstrasser, HEREBY
CERTIFY upon honor that, in pursuance of ^{supplemental} special instructions bearing date of the 12th day
of August, 1969, (I) ~~(ME)~~ ~~XXXX~~ completed the survey of the subdivisi
lines of T. 6 N., R. 11 W.,

of the Salt Lake Meridian, in the State of Utah, which
are represented in the foregoing field notes as having been executed by (me), ~~(me)~~ and under (my)
~~(me)~~ direction; and that said survey has been made in strict conformity with said special instruc
tions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in
specific manner described in the foregoing field notes.

October 15, 1969
(Date)  (Cadastral Surveyor)

(Date) (Cadastral Surveyor)


CERTIFICATE OF APPROVAL

AUG 31 1969
NOV 10 1969
OCT 24 1969

BUREAU OF LAND MANAGEMENT
Washington, D.C.

The foregoing field notes of the survey completing the survey of the subdivisional
lines of T. 6 N., R. 11 W., Salt Lake Meridian, Utah, and the survey of
the south and east boundaries of T. 6 N., R. 11 W., Salt Lake Meridian,
Utah,

executed by Gerald W. Hochstrasser, Cadastral Surveyor, Boyd S. Owens,
Cadastral Surveyor.
having been critically examined and found correct, are hereby approved.

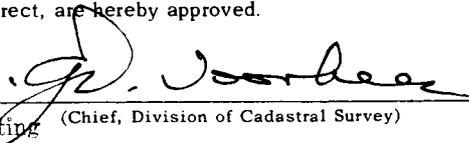JAN 24 1970
(Date)  Acting (Chief, Division of Cadastral Survey)

CERTIFICATE OF TRANSCRIPT

Whereas the foregoing is a true copy of the field notes of the above mentioned survey, it
is a true copy of the original field notes.

(Date) (Chief, Division of Cadastral Survey)

Blank

Page

Blank

Page

ORIGINAL

FIELD NOTES

OF THE

DEPENDENT RESURVEY OF THE SOUTH BOUNDARY

AND

THE EAST BOUNDARY

AND

A PORTION OF THE NORTH BOUNDARY

OF

TOWNSHIP 7 NORTH, RANGE 11 WEST

1000

Of the _____ SALT LAKE _____ Meridian,

the State of _____ UTAH _____

EXECUTED BY

Boyd S. Owens, Cadastral Surveyor

Under special instructions dated March 3, 19 61, which provided for the surveys

included under Group Number 443, approved March 10, 1961,

assignment instructions dated April 25, 19 61.

Survey commenced July 7, 19 61

Survey completed July 13, 19 61

INDEX DIAGRAM

Township 7 NORTH, Range 11 WEST,

			2	3	3
6	5	4	8	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36
4	5	6	7		

Township 7 North, Range 11 West

CHAINS

The west boundary, the north boundary, a portion of the south boundary, a portion of the east boundary and a portion of the subdivision west of the Great Salt Lake, was surveyed by Edmund Wilkes and Charles L. Betts in 1886. Corners established in 1961, under this group, now falling in the relicted land area of Great Salt Lake, as a result of the closing of the meander lines of Great Salt Lake under Group No. 490, dated August 10, 1966, have been removed in accordance with supplemental special instructions for Group 443, Utah, dated August 12, 1969.

The following field notes are those of the dependent resurvey of the south boundary, the east boundary and a portion of the north boundary of Township 7 North, Range 11 West, deemed sufficient in extent to facilitate development of the natural resources.

Before restoring the corners, the lines of the original survey were retraced, and diligent search made for any evidence of the original corners, or other calls of the original field note record.

The rules of proportionate measurement were applied to ascertain the position of the lost corners only after exhausting every reasonable possibility of finding direct evidence of the lost corners.

The survey was executed with a W. & L. E. Gurley Solar Transit No. 591189 constructed in accordance with the standard instrumental specifications of the Bureau of Land Management. The instrument was in good condition prior to the beginning of the survey and was maintained in proper adjustment throughout the progress of this survey.

Lines connecting previously established corners were run by random and true method, but for simplification of the record the random lines were omitted from the field notes.

Measurements herein contained were made with a narrow steel tape, 8 chains in length, graduated every link for the first 100 links and thereafter at intervals of 10 links. The tape was tested by comparison with a one chain standard steel tape and found to be correct. Measurements were made on the slope with the vertical angle of each interval ascertained by a clinometer in good adjustment; horizontal equivalents alone are entered in the field notes. All lines of this survey were run by direct method where the lines were accessible; lines inaccessible were run by traverse or triangulation methods.

The details of such traverses or triangulations have been thoroughly checked and verified, and in order to simplify the record the diagrams and reductions are omitted from these field notes.

The direction of the lines of this survey were determined by reference to true meridians established on line by altitude observations on the sun. The lines were carried forward by sustained angulation being supplemented by other numerous altitude observations on the sun taken throughout the progress of the survey.

The geographic position for the southeast corner of the township is at Latitude $41^{\circ} 16' 49.17''$ N. and Longitude $113^{\circ} 04' 54.46''$ W., as determined by adjusted traverses

Township 7 North, Range 11 West

CHAINS

from U.S.G.S. triangulation station "Hogup" located in sec. 22, T. 6 N., R. 11 W., in Latitude $41^{\circ} 13' 43.950''$ N. and Longitude $113^{\circ} 04' 49.664''$ W. The magnetic declination was read at a number of stations throughout the township and the average of these readings was found to be $16^{\circ} 45'$ east.

Dependent Resurvey of a Portion of the North Boundary of Township 7 North, Range 11 West

Reestablishment of the survey executed by Edmund Wilkes and Charles L. Betts in 1886.

Beginning at the cor. of secs. 3, 4, 33 and 34, on the N. bdy. of the Tp., which is monumented with a limestone, 6x8x12 ins., set, mkd. and witnessed as described in the official record.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 22 ins. in the ground, with brass cap mkd.

T8N R11W

S33	S34
S4	S3

T7N

1961

Dig pits, 18x18x12 ins. in each sec., 4 ft. dist., and deposit stone cor. alongside iron post.

N. $89^{\circ} 56'$ E., bet. secs. 3 and 34.

Over nearly level land through moderate shadscale.

4.10 Road, dirt, bears N. 25° E. and S. 25° W.

40.41 Point for the $\frac{1}{2}$ sec. cor. of secs. 3 and 34, at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 22 ins. in the ground, with brass cap mkd.

T8N R11W

$\frac{1}{2}$	S34
	S3

T7N

1961

Dig pits, 18x18x12 ins., E. and W. of cor., 4 ft. dist., and raise a mound of earth, 3 ft. base, 2 ft. high, N. of cor.

Continue over level land.

Dependent Resurvey of a Portion of the North
Boundary of Township 7 North, Range 11 West

CHAINS

- 72.00 Enter muddy, alkali land and scattered salt brush.
- 80.82 The cor. of secs. 2, 3, 34 and 35, monumented with a limestone, 4x8x10 ins., with 2 notches on edge, lying loose on the ground; accept as original cor.
- At the cor. point
- Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:
- T8N S35 on NE.; R11W S2 on SE.; T7N S3 on SW. and S34 on NW. faces, with 4 notches on W. and 2 on E. edges. Dig pits, 18x18x12 ins., in each sec., 4 ft. dist., and deposit stone cor. and glass alongside fir post.
- Land, nearly level desert.
Soil, alkali clay, fourth rate.
Vegetation, shadscale and scattered salt brush.
- 40.39 S. 89° 35' E., bet. secs. 2 and 35.
- Over muddy, alkali land through scattered salt brush.
- Point for the $\frac{1}{2}$ sec. cor. of secs. 2 and 35, at proportionate dist. Found an unmarked stone, 6x6x4 ins.
- Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:
- T8N $\frac{1}{2}$ S35 on N.; R11W on E. and T7N S2 on S. faces. Dig pits, 18x18x12 ins., E. and W. of cor., 4 ft. dist., and raise a mound of earth, 3 ft. base, 2 ft. high, N. of cor. Bury stone and glass alongside fir post.
- Continue over level muddy land.
- 80.78 The original cor. of secs. 1, 2, 35 and 36, monumented with a stone, 8x12x18 ins., set, mkd. and witnessed as described in the official record.
- At the cor. point
- Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:
- T8N S36 on NE.; R11W S1 on SE.; T7N S2 on SW. and S35 on NW. faces, with 5 notches on W. and 1 on E. edges. Dig pits, 18x18x12 ins., in each sec., 4 ft. dist. Deposit glass at base of post, and bury stone cor. alongside.
- Land, level alkali desert.
Soil, alkali clay, muddy.
Vegetation, scattered salt brush.
- S. 89° 43' E., bet. secs. 1 and 36.

Dependent Resurvey of a Portion of the North
Boundary of Township 7 North, Range 11 West

CHAINS

Over level, muddy alkali land through scattered salt brush.

- 40.55 Point for the $\frac{1}{2}$ sec. cor. of secs. 1 and 36, at proportionate dist.; there is no remaining evidence of the original cor.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:

T8N $\frac{1}{2}$ S36 on N.; R11W on E. and T7N S1 on S. faces. Dig pits, 18x18x12 ins., E. and W. of cor., 4 ft. dist., and raise a mound of earth, 3 ft. base, 2 ft. high, N. of cor. Deposit glass at base of post.

Continue over level, muddy land.

- 81.10 Point for the cor. of Tps. 7 and 8 N., Rs. 10 and 11 W., at proportionate dist., bet. the cor. of secs. 1, 2, 35 and 36, Tps. 7 and 8 N., R. 11 W. and the cor. of secs. 5, 6, 31 and 32, Tps. 7 and 8 N., R. 10 W.; there is no remaining evidence of the original cor. No corners found to the N. or S.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:

T8N S31 on NE.; R10W S6 on SE.; T7N S1 on SW. and R11W S36 on NW. faces, with 6 notches on N., S., E. and W. edges. Dig pits, 18x18x12 ins., N., S., E. and W. of cor., 4 ft. dist., and deposit glass alongside fir post.

From this cor., the margin of Great Salt Lake, bears N., 304.53 chs. dist. (No original cors. found along this line.)

From the same cor., the cor. of secs. 5, 6, 31 and 32, Tps. 7 and 8 N., R. 10 W., bears S. 89° 43' E., 81.10 chs. dist., and is monumented with a 2½ in. iron post, set, mkd. and witnessed as described in the 1961 field notes of a portion of the N. bdy. of T. 7 N., R. 10 W.

Land, level, muddy desert.
Soil, alkali clay, muddy.
Vegetation, scattered salt brush.

Dependent Resurvey of a Portion of the South
Boundary of Township 7 North, Range 11 West,
with original cors. Remonumented to function
for Township 7 North, Range 11 West only.

Reestablishment of the survey executed by
Edmund Wilkes and Charles L. Betts in 1886.

From the cor. of Tp. 7 N., Rs. 11 and 12 W., which is monumented with a 2½ in. iron post, set, mkd. and witnessed as described in the 1961 field notes of the dependent resurvey of the S. bdy. of T. 7 N., R. 12 W.

Dependent Resurvey of a Portion of the South
Boundary of Township 7 North, Range 11 West

CHAINS

N. 89° 47' E., along the S. bdy. of sec. 31.

Over nearly level clay bench land through moderate
shadscale brush.

40.33 The original $\frac{1}{2}$ sec. cor. of secs. 6 and 31, monumented
with a sandstone, loosely set, and dimly mkd., conform-
ing to the record. This cor. now functions as the $\frac{1}{2}$
sec. cor. of sec. 31, T. 7 N., R. 11 W., only.

At the cor. point

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the
ground, scribed as follows:

T7N R11W $\frac{1}{2}$ S31 on N. face. Dig pits 18x18x12 ins.,
E. and W. of cor., 4 ft. dist., and raise a mound
of earth, 3 ft. base, 2 ft. high, N. of cor. Bury
stone cor. alongside fir post.

N. 89° 42' E., beginning new measurement.

Continue over nearly level land.

27.00 Center of wash, 6.50 chs. wide, 15 ft. deep, drains
S. 30° E.

32.50 Road, bladed dirt, bears NW. and SE.

40.30 The original cor. of secs. 5, 6, 31 and 32, monumented
with a mound of stone, conforming to the records. No
marked stone found. This cor. now functions as the cor.
of secs. 31 and 32, T. 7 N., R. 11 W., only.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 22 ins.
in the ground, with brass cap mkd.

T7N R11W

S31|S32

S5

T6N

1961

Raise a mound of stone, 2 $\frac{1}{2}$ ft. base, 1 $\frac{1}{2}$ ft. high,
N. of cor.

Land, nearly level benchland.

Soil, clay, third rate.

Vegetation, small shadscale brush.

N. 89° 33' E., along the S. bdy. of sec. 32.

Over nearly level clay benchland through moderate
shadscale brush.

13.20 Old road, bears N. 15° W. and S. 15° E.

23.80 Old road, bears N. 15° W. and S. 15° E.

Dependent Resurvey of a Portion of the South
Boundary of Township 7 North, Range 11 West

CHAINS

34.50 Base of ridge, bears NW. and SE.; asc. 35 ft. over gentle SW. slope.

40.16 The original $\frac{1}{2}$ sec. cor. of secs. 5 and 32, monumented with a lava stone, 4x12x15 ins., set, mkd. and witnessed as described in the official record. This cor. now functions as the $\frac{1}{2}$ sec. cor. of sec. 32, T. 7 N., R. 11 W., only.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 12 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T7N R11W

S32

T6N

1961

Bury stone cor. alongside iron post.

N. 89° 31' E., beginning new measurement.

Asc. 75 ft. over gentle SW. slope.

39.94 The original cor. of secs. 4, 5, 32 and 33, monumented with a sandstone, 6x10x12 ins., set, mkd. and witnessed as described in the official record. This cor. now functions as the cor. of secs. 32 and 33, T. 7 N., R. 11 W., only.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins. in the ground, with brass cap mkd.

T7N R11W

S32'S33

S4

T6N

1961

Dig pits, 18x18x12 ins., NE. and NW. of cor., 4 ft. dist., and raise a mound of earth, 3 ft. base, 2 ft. high, N. of cor. Bury stone cor. alongside iron post.

Land, nearly level W. portion; rolling E. portion.

Soil, clay, third rate.

Vegetation, moderate shadscale brush.

N. 89° 40' E., along the S. bdy. of sec. 33.

Over rolling clay ridges and benchland through moderate shadscale brush.

7.20 Wash, 10 lks. wide, 3 ft. deep, drains S. 40° W.; asc. 115 ft. over SW. slope.

Dependent Resurvey of a Portion of the South
Boundary of Township 7 North, Range 11 West

CHAINS

34.20 Crest of ridge, bears N. and S.; desc. 35 ft. over E. slope.

40.59 The original $\frac{1}{2}$ sec. cor. of secs. 4 and 33, monumented with a sandstone, 6x12x16 ins., set, mkd. and witnessed as described in the official record. This cor. now functions as the $\frac{1}{2}$ sec. cor. of sec. 33, T. 7 N., R. 11 W., only.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 12 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T7N R11W

$\frac{1}{2}$ S33

T7N

1961

Bury stone cor. alongside iron post.

N. 89° 36' E., beginning new measurement.

Desc. 235 feet over E. slope.

13.42 Gully drains irregularly NE.

41.64 The original cor. of secs. 3, 4, 33 and 34, monumented with a conglomerate stone, 6x20x40 ins., set, mkd. and witnessed as described in the official record. This cor. now functions as the cor. of secs. 33 and 34, T. 7 N., R. 11 W., only.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 14 ins. in the ground and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T7N R11W

S33|S34

S3

T6N

1961

Bury stone cor. alongside iron post.

Land, rolling benchland.

Soil, clay and gravel, third rate.

Vegetation, moderate shadscale brush.

N. 89° 32' E., along the S. bdy. of sec. 34.

Over nearly level land through moderate shadscale brush.

Desc. 40 ft. over E. slope.

Dependent Resurvey of a Portion of the South
Boundary of Township 7 North, Range 11 West

CHAINS

33.40 Enter barren, alkali desert, bears irregularly N. and S.
Leave vegetation.

40.08 The original $\frac{1}{4}$ sec. cor. of secs. 3 and 34, monumented
with a limestone 8x10x12 ins., set, mkd. and witnessed
as described in the official record. This cor. now
functions as the $\frac{1}{4}$ sec. cor. of sec. 34, T. 7 N., R.
11 W., only.

At the cor. point

Set a fir post, 4x4 ins., 4 ft. long, 30 ins. in the
ground, scribed as follows:

T7N R11W $\frac{1}{4}$ S34 on N. face. Dig pits, 18x18x12
ins., E. and W. of cor., 4 ft. dist., and raise
a mound of earth, 3 ft. base, 2 ft. high, N. of
cor. Bury stone cor. alongside fir post, and
deposit glass at base of post.

N. 89° 32' E., beginning new measurement.

1.00 The original meander cor. of secs. 3 and 34, on the
west bank of Great Salt Lake, monumented with a pine
post, broken off level with the ground and badly de-
teriorated, conforming to the record.

At the cor. point

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the
ground, scribed as follows:

T7N S34 on N.; MC on E.; T6N S3 on S. and R11W on
W. faces. Dig pits, 18x18x12 ins., W. of cor., 3
ft. and 6 ft. dist. Deposit glass at base of post.

Land, level alkali desert.
Soil, alkali clay, fourth rate.
Vegetation, moderate shadscale brush.

Dependent Resurvey of a Portion of the East
Boundary of Township 7 North, Range 11 West

Reestablishment of the Survey Executed by
Edmund Wilkes and Charles L. Betts, in 1886.

From the cor. of Tps. 7 and 8 N., Rs. 10 and 11 W.,
previously described.

South, along the E. bdy. of sec. 1.

Over level barren desert land.

Dependent Resurvey of a Portion of the East
Boundary of Township 7 North, Range 11 West

CHAINS

20.00

Point for the meander cor. of secs. 1 and 6, at record course and dist., south from the reestablished cor. of Tps. 7 and 8 N., Rs. 10 and 11 W.; there is no remaining evidence of the original meander cor.

Set a fir post, 4x4 ins., 4 ft. long, 36 ins. in the ground, scribed as follows:

T7N on N., R10 W S6 on E.; MC on S. and R11 W S1 on W. faces. Dig pits, 18x18x12 ins., N. of the cor., 3 ft. and 6 ft. dist. Deposit broken glass at base of post.

Land, level desert.
Soil, alkali clay.
Vegetation, none.

General Description

The land in Township 7 North, Range 11 West is barren, alkali desert land in the Great Salt Lake Desert. There are a few rolling clay hills and ridges, with scattered to moderate shadscale and salt brush in the west portion. The east portion is barren and level.

The elevation is about 4,200 feet above sea level. Soil is alkali clay, fourth rate. The drainage is in an easterly direction. There are several old or bladed dirt roads in the southwestern portion. No water in this township.

Blank

Page

CERTIFICATE OF SURVEY

(I) ~~(WE)~~, Boyd S. Owens, HEREBY

CERTIFY upon honor that, in pursuance of special instructions bearing date of the 3rd day of March, 1961, (I) ~~(WE)~~ dependently resurveyed the south boundary and a portion of the north boundary of T. 7 N., R. 11 W.

of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by (me), ~~(us)~~ and under (my) ~~(our)~~ direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

October 15, 1969
(Date)

Boyd S. Owens
(Cadastral Surveyor)

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

CERTIFICATE OF APPROVAL
Date Aug 21 1962
NOV 13 1963
OCT 24 1969

BUREAU OF LAND MANAGEMENT
Washington, D.C.

The foregoing field notes of the dependent resurvey of the south boundary, east boundary and a portion of the north boundary of T. 7 N., R. 11 W., Salt Lake Meridian, Utah

executed by Boyd S. Owens, Cadastral Surveyor

having been critically examined and found correct, are hereby approved.

JAN 21 1970
(Date)

J. D. ...
... (Chief, Division of Cadastral Survey)

CERTIFICATE OF TRANSCRIPT

~~I CERTIFY That the foregoing transcript of the field notes of the above described surveys in~~
~~, is a true copy of the original field notes.~~

(Date)

(Chief, Division of Cadastral Survey)

Blank

Page

Blank

Page

FIELD NOTES

OF THE

DEPENDENT RESURVEY OF A PORTION

OF THE EAST BOUNDARY OF THE TOWNSHIP

AND THE SURVEY OF A PORTION

OF THE SUBDIVISION LINES OF SECTION 25 OF

TOWNSHIP 36 SOUTH, RANGE 18 EAST

Of the SALT LAKE Meridian,
the State of UTAH

EXECUTED BY

LEO J. WOSTER

CADASTRAL SURVEYOR


Under special instructions dated May 29, 19 69, which provided for the surveys
included under Group Number 512, approved June 6, 1969,
assignment instructions dated June 2, 19 69.

Survey commenced June 4, 19 69

Survey completed June 18, 19 69

INDEX DIAGRAM

Township 35 South, Range 18 East

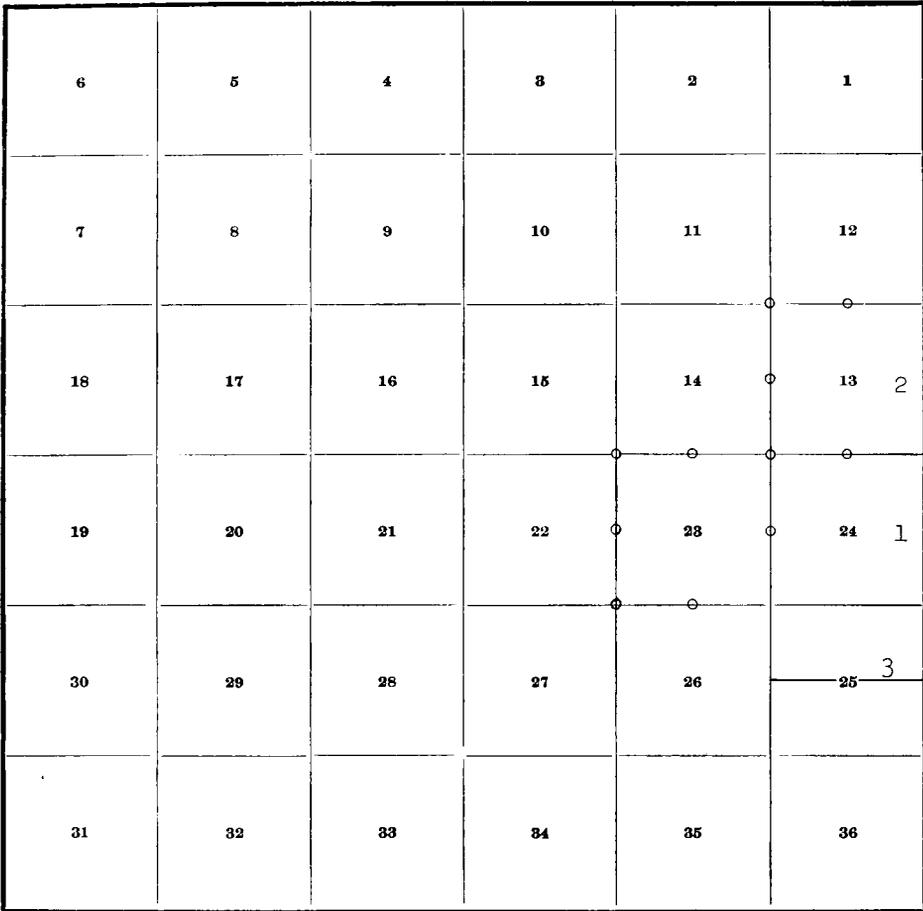

Corners Rehabilitated pp. 4-12

Township 36 South, Range 18 East
Salt Lake Meridian, Utah

CHAINS

Township 36 South, Range 18 East. The Seventh Standard Parallel South (the north boundary of the township) was surveyed by Emil Voigt, Cadastral Engineer, in 1927. The east, south, and west boundary, and the subdivision lines were surveyed by Robert C. Yundt, Cadastral Engineer, in 1930, as shown upon the official plat accepted June 10, 1937.

The following field notes are those of the dependent resurvey of a portion of the east boundary of the township and the survey of a portion of the subdivision lines of section 25, and the rehabilitation of a number of corner monuments of Township 36 South, Range 18 East, of the Salt Lake Meridian, Utah.

The survey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1947, and the special instructions dated May 29, 1939.

The directions of all lines of this survey were determined by direct altitude observations on the sun for azimuth, and carried forward by normal transit traverse.

The geographic position of the southeast corner of section 25 is: Latitude $37^{\circ} 37.2' N.$, Longitude $109^{\circ} 52.4' W.$, as determined by scaling on a reliable U. S. Geological Survey Topographic map, Elk Ridge 3 NE., Utah, 1954.

The magnetic declination as obtained by reference to the above topographic map, is: $15^{\circ} E.$

Dependent Resurvey of a Portion
of the East Boundary
Township 36 South, Range 18 East
Salt Lake Meridian, Utah

Re-establishment of the Survey Executed by
Robert C. Yundt, Cadastral Engineer, in 1930

Beginning at the 1/4 sec. cor. of secs. 19 and 24, Tps. 36 S., Rs. 18 and 19, monumented by an iron post, 1 in. in diam., firmly set, projecting 2 ins. above the ground, with brass cap mkd.

$\frac{1}{4}$
S 24 | S 19
1939
1930

substantiated by:

A mound of stone, $2\frac{1}{2}$ ft. base, 2 ft. high, W. of the corner; restore same.

A pine, 14 ins. in diam., bears S. $9\frac{1}{2}^{\circ} W.$, 27 lks. dist., scribing illegible (record: "A long leaf pine 12 ins. in diameter, marked 1/4S24BT, bears N $0^{\circ} 15'$ W, 26 links distant.").

from which a new bearing tree,

Dependent Resurvey of a Portion
of the East Boundary
Township 36 South, Range 18 East
Salt Lake Meridian, Utah

CHAINS

A pine, 10 ins. in diam., bears N. 57° E., 73 lks.
dist., mkd. T36S R18E 1/4 S19 BT.

NORTH, between secs. 19 and 24, along the E. boundary of
the township.

Ascend over SE. slope, through scattering timber.

The cor. of secs. 13, 18, 19 and 24, monumented with an
iron post, 27 ins. in diam., firmly set, projecting 15 ins.
above the ground, and in a mound of stone, 2 ft. base,
with trass cap mkd.

T36S
R18E R18E
S 13 S 13
S 13 S 13
1900

monumented by:

A pine, 12 ins. in diam., bears N. 62° E., 2.75 chs.
dist., mkd. T36S R18E S13 BT (recor: "A yellow pine,
12 ins. in diameter, marked T36SR18E S13 BT. bears
N 62° E., 2 3/4 links distant.").

A pine, 14 ins. in diam., bears S. 44° W., 1.1 lks.
dist., mkd. T36S (the remaining portion illegible)
(recor: "A yellow pine, 14 ins. in diameter, marked
T36SR18E S13 BT. bears S 44° W., 1 1/10 links distant.").

A pine, 12 ins. in diam., bears N. 44° W., 1.25 chs.
dist., mkd. T36S R18E X S13 BT. (recor: "A yellow
pine, 12 ins. in diameter, marked T36SR18E S13 BT.
bears N 44° W., 1 1/4 links distant.").

NORTH, between secs. 13 and 18, along the E. boundary of
the township.

over rolling E. slope, through scattering timber.

The point for the 1/4 sec. cor. of secs. 13 and 18, at
proportionate distance. There is no evidence of the
original corner monument.

Set an iron post, 30 ins. long, 2 1/2 ins. in diam., 24 ins.
in the ground, with trass cap mkd.

T36S
R18E R18E
↓
S 13 S 13
1900

from which

A pine, 10 ins. in diam., bears N. $44\frac{1}{2}^{\circ}$ W., 1.26 chs.
dist., mkd. T36S R18E 1/4 S13 BT.

No other suitable accessory available.

327

Dependent Resurvey of a Portion
of the East Boundary
Township 30 South, Range 18 East
Salt Lake Meridian, Utah

CHAINS

79.90

The cor. of secs. 7, 12, 13, and 18, monumented with an iron post, 2 ins. in diam., firmly set, projecting 2 ins. above the ground, with brass cap mkd.

TRES	
R19E	R19E
S 12	S 7
S 13	S 18
1909	
1939	

substantiated by:

An aspen, 10 ins. in diam., bears N. 32 $^{\circ}$ E., 20 lks. dist., scribing illegible (record: "An aspen, 10 ins. in diameter, marked T30SR19ES BT, bears N 31 $^{\circ}$ 45' E. 23 links distant.").

An aspen, 12 ins. in diam., bears S. 7 $^{\circ}$ E., 20 lks. dist., mkd. T30S R19E S18 BT, (record: "An aspen, 12 ins. in diameter, marked T30SR19ES18 BT, bears S 11 $^{\circ}$ 45' E, 22 links distant.").

An aspen, 10 ins. in diam., bears S. 40 $^{\circ}$ W., 30 lks. dist., mkd. T30S R18E S13 BT (record: "An aspen, 10 ins. in diameter, marked T30SR18ES13 BT, bears S 41 $^{\circ}$ 45' W, 30 links distant.").

An aspen, 10 ins. in diam., bears N. 34 $^{\circ}$ W., 20 lks. dist., scribing illegible (record: "An aspen, 10 ins. in diameter, marked T30SR18ES12 BT, bears N 37 $^{\circ}$ 15' W, 22 links distant.").

The Survey of a Portion of the
Subdivision Lines of Section 25
Township 30 South, Range 18 East
Salt Lake Meridian, Utah

From the 1/4 sec. cor. of secs. 25 and 30, Twp. 30 S., Rs. 18 and 19 E., monumented with an iron post, 1 in. in diam., firmly set, projecting 5 ins. above the ground, with brass cap mkd.

L	
S 25	S 30
1909	
1939	

substantiated by:

A pinyon pine, 11 ins. in diam., bears S. 31 $^{\circ}$ E., 48 lks. dist., mkd. S30 BT (record: "A pinyon, 11 ins. in diameter, marked 1/4 S30 BT, bears S 31 $^{\circ}$ 45' E. 47 links distant.").

A pinyon pine, 11 ins. in diam., bears N. 53 $^{\circ}$ W., 32 lks. dist., scribing illegible (record: "A pinyon, 11 ins. in diameter, marked 1/4 S25 BT, bears N 47 $^{\circ}$ 15' W, 32 links distant.").

S. 89 $^{\circ}$ 50' W., on the latitudinal center line of sec. 25.

The Survey of a Portion of the
 Subdivision Lines of Section 25
 Township 36 South, Range 18 East
 Salt Lake Meridian, Utah

CHAINS

Descend over rough to broken SW. slope, through scatterin
 timber.

30.00 The 1/4 sec. cor. of secs. 25 and 26, monumented with an
 iron post, 1 in. in diam., firmly set, projecting 12 ins.
 above the ground, with brass cap mkd.

$\frac{1}{4}$
 S 26 | S 25
 1969
 1930

substantiated by:

A pinyon pine, 14 ins. in diam., bears N. $48\frac{1}{2}^{\circ}$ E.,
 23 lks. dist., mkd. 1/4 S25 BT (record: "A pinon,
 12 ins. in diameter, marked $\frac{1}{4}$ S25BT, bears N $49^{\circ}00'$ E,
 22 links distant.").

A pinyon pine, 9 ins. in diam., bears S. $52\frac{1}{4}^{\circ}$ W.,
 22 lks. dist., mkd. 1/4 S26 BT (record: "A pinon,
 4 ins. in diameter, marked $\frac{1}{4}$ S26BT, bears S $40^{\circ}45'$ W,
 20 links distant.").

The Rehabilitation of a Number of Corner Monuments
 Township 36 South, Range 18 East
 Salt Lake Meridian, Utah

The cor. of Tps. 36 S., Rs. 18 and 19 E., secs. 25, 30,
 31, and 36, monumented with an iron post, 2 ins. in diam.,
 firmly set in a mound of stone, $2\frac{1}{2}$ ft. base, to top, with
 brass cap mkd.

T36S
 R18E R19E
 S 25 | S 30
 S 36 | S 31
 1969
 1930

substantiated by:

A pinyon pine, 11 ins. in diam., bears N. $\frac{1}{2}^{\circ}$ E.,
 40 lks. dist., mkd. T36S R19E S30 BT. (record: "A
 pinon, 8 ins. in diameter, marked T36SR19ES30BT,
 bears N. $15^{\circ}00'$ E. 39 links distant.").

A pinyon pine, 11 ins. in diam., bears S. 76° E.,
 20 lks. dist., mkd. T36S R19E S31 BT. (record: "A
 pinon, 12 ins. in diameter, marked T36SR19ES31BT,
 bears S. $72^{\circ}45'$ E. 20 links distant.").

A pinyon pine, 13 ins. in diam., bears S. 46° W.,
 76 lks. dist., mkd. T36S R18E S36 BT. (record: "A
 pinon, 10 ins. in diameter, marked T36SR18ES36BT,
 bears S. $44^{\circ}30'$ W. 76 links distant.").

A pinyon pine, 8 ins. in diam., bears N. $54\frac{1}{4}^{\circ}$ W.,
 20 lks. dist., mkd. BT. (record: "A pinon, 3 ins. in
 diameter, marked 'BT', bears N. $57^{\circ}15'$ W. 20 links
 distant.").

The Rehabilitation of a Number of Corner Monuments
Township 36 South, Range 18 East
Salt Lake Meridian, Utah

CHAINS

The 1/4 sec. cor. of secs. 25 and 30, Tps. 36 S., Rs. 18 and 19 E., monumented with an iron post, 1 in. in diam., firmly set, projecting 8 ins. above the ground, with brass cap mkd.

$$\begin{array}{c} \frac{1}{4} \\ \hline S\ 25\ | S\ 30 \\ 1969 \\ 1930 \end{array}$$

substantiated by:

A pinyon pine, 11 ins. in diam., bears S. 31° E., 48 lks. dist., mkd. S30 BT. (record: "A pinon, 8 ins. in diameter, marked $\frac{1}{4}$ S30BT, bears S 65°00' E. 47 links distant.").

A pinyon pine, 11 ins. in diam., bears N. 53° W., 32 lks. dist., scribing illegible (record: "A pinon, 6 ins. in diameter, marked $\frac{1}{4}$ S25BT, bears N 40° 00' W. 32 links distant.").

The cor. of Tps. 36 S., Rs. 18 and 19 E., secs. 19, 24, 25, and 30, monumented with an iron post, 2 ins. in diam., firmly set, projecting 12 ins. above the ground, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.

$$\begin{array}{c} T36S \\ R18E\ R19E \\ \hline S\ 24\ | S\ 19 \\ \hline S\ 25\ | S\ 30 \\ 1969 \\ 1930 \end{array}$$

No evidence of the original bearing trees; and no suitable accessories available.

The 1/4 sec. cor. of secs. 25 and 30, monumented with an iron post, 1 in. in diam., firmly set, projecting 12 ins. above the ground, and in a collar of stone, with brass cap mkd.

$$\begin{array}{c} \frac{1}{4} \\ \hline S\ 25 \\ \hline S\ 30 \\ 1969 \\ 1930 \end{array}$$

substantiated by:

A pinyon pine, 13 ins. in diam., bears S. 54 $\frac{1}{2}$ ° E., 24 lks. dist., mkd. 1/4 S30 BT. (record: "A pinon, 18 ins. in diameter, marked $\frac{1}{4}$ S30BT, bears S 55°30' E. 17 links distant.").

A pinyon pine, 8 ins. in diam., bears N. 43° W., 29 lks. dist., mkd. BT. (record: "A pinon, 6 ins. in diameter, marked $\frac{1}{4}$ S25BT, bears N 47° W, 33 links distant.").

The cor. of secs. 25, 26, 35, and 36, monumented with an iron post, 2 ins. in diam., firmly set in a mound of stone, 5 ft. base, to top, with brass cap mkd.

The Rehabilitation of a Number of Corner Monuments
Township 36 South, Range 18 East
Salt Lake Meridian, Utah

CHAINS

T36S R18E
S 26 | S 25
S 35 | S 30
1969
1930

substantiated by:

A pinyon pine, 13 ins. in diam., bears N. 16° E., 41 lks. dist., mkd. T36S R18E S25 BT. (record: "A pinon, 12 ins. in diameter, marked T36SR18ES25BT, bears N 12°30' E, 39 links distant.").

A pinyon pine, 7 ins. in diam., bears S. 27° E., 27 lks. dist., scribing illegible (record: "A pinon, 7 ins. in diameter, marked T36SR18ES30BT, bears S 27°15' E, 20 links distant.").

A pinyon pine (dead) 5 ins. in diam., bears S. 71½° W., 45 lks. dist., mkd. BT (record: "A pinon, 4 ins. in diameter, marked 'BT', bears S 61°00' W, 40 links distant.").

A pinyon pine, 14 ins. in diam., bears N. 41° W., 73 lks. dist., mkd. T36S R18E S26BT (record: "A pinon, 10 ins. in diameter, marked T36SR18ES26BT, bears N 42°15' W, 73 links distant.").

from which a new bearing tree,

A pinyon pine, 8 ins. in diam., bears S. 41½° W., 59 lks. dist., mkd. T36S R18E S35 BT.

The 1/4 sec. cor. of secs. 25 and 26, monumented with an iron post, 1 in. in diam., firmly set, projecting 12 ins. above the ground, and in a collar of stone, with brass ca mkd.

S 26 | S 25
1969
1930

substantiated by:

A pinyon pine, 14 ins. in diam., bears N. 48½° E., 23 lks. dist., mkd. 1/4 S25 BT. (record: "A pinon, 12 ins. in diameter, marked 1/4 S25BT, bears N 49°00' E 22 links distant.").

A pinyon pine, 9 ins. in diam., bears S. 52¼° W., 22 lks. dist., mkd. 1/4 S26 BT. (record: "A pinon, 4 ins. in diameter, marked 1/4 S26BT, bears S 40° 45' W 20 links distant.").

The cor. of secs. 23, 24, 25, and 26, monumented with an iron post, 2 ins. in diam., firmly set, projecting 14 ins above the ground, and in a collar of stone, with brass ca mkd.

T36S R18E
S 23 | S 24
S 26 | S 25
1969
1930

CHAINS

substantiated by:

A ponderosa pine, 22 ins. in diam., bears N. 37° E.,
 1.34 chs. dist., mkd. T3 S R1 E. (record: "A 1 in.
 12 ins. in diameter, marked T3 S R1 E 1 BT, bears
 S 37°45' E, 17 links distant.").

A ponderosa pine, 21 ins. in diam., bears N. 37° W.,
 193 lks. dist., scribbling illegible (record: "A 1 in.
 6 ins. in diameter, marked T3 S R1 E 1 BT, bears
 N 3°30' W, 17 links distant.").

from which new bearing trees.

A ponderosa pine, 13 ins. in diam., bears N. 37° E.,
 1.35 chs. dist., mkd. T3 S R1 E S 1 BT.

A pinyon pine, 21 ins. in diam., bears S. 37° W.,
 1.29 chs. dist., mkd. T3 S R1 E S 1 BT.

The 1/4 sec. cor. of secs. 28 and 29, monumented with an
 iron post, 1 in. in diam., firmly set, projecting 2 ins.
 above the ground, with brass cap mkd.

1/4
 S 24
 S 25
 1931
 1931

No evidence of the original bearing trees.

Set a wooden guard post, 4 ft. long, 3 ins. dia., at
 the corner, and no other suitable accessory.

The 1/4 sec. cor. of secs. 23 and 24, monumented with an
 iron post, 1 in. in diam., firmly set, projecting 2 ins.
 above the ground, and in a mound of stone, 3 ft. deep,
 to top, with brass cap mkd.

1/4
 S 23 | S 24
 1931
 1931

substantiated by:

A pinyon pine, 19 ins. in diam., bears S. 37° E.,
 44 lks. dist., mkd. 1/4 S24 BT. (record: "A 1 in.
 7 ins. in diameter, marked 1/4 S24 BT, bears S 37° E,
 51 links distant.").

A pinyon pine, 19 ins. in diam., bears N. 37° W.,
 44 lks. dist., mkd. 1/4 S23 BT. (record: "A 1 in.
 7 ins. in diameter, marked 1/4 S23 BT, bears N 37° W,
 43 links distant.").

The cor. of secs. 13, 14, 23, and 24, monumented with an
 iron post, 2 ins. in diam., firmly set, projecting 2 ins.
 above the ground, and in a collar of stone, with brass cap
 mkd.

The Rehabilitation of a Number of Corner Monuments
Township 36 South, Range 18 East
Salt Lake Meridian, Utah

CHAINS

T36S R18E
S 14 | S 13
S 23 | S 24
1969
1930

substantiated by:

A ponderosa pine, 12 ins. in diam., bears N. $62\frac{3}{4}^{\circ}$ E.
95 lks. dist., scribing illegible (record: "A
juniper, 8 ins. in diameter, marked T36SR18ES13BT,
bears N $26^{\circ}45'$ E, 87 links distant.").

A ponderosa pine, 18 ins. in diam., bears S. $3\frac{3}{4}^{\circ}$ E.,
76 lks. dist., mkd. T36S R18E S24 BT. (record: "A
pine, 24 ins. in diameter, marked T36SR18ES24BT,
bears S $46^{\circ}15'$ E, 93 links distant.").

A pinyon pine, 9 ins. in diam., bears N. 15° W., 24
lks. dist., scribing illegible (record: "A pine, 3
ins. in diameter, marked 'BT' only, bears N $69^{\circ}45'$ W
13 links distant.").

The $\frac{1}{4}$ sec. cor. of secs. 13 and 24, monumented with an
iron post, 1 in. in diam., firmly set, projecting 6 ins.
above the ground, and in a collar of stone, with brass ca
mkd.

$\frac{1}{4}$ S 13
S 24
1969
1930

substantiated by:

A juniper, 11 ins. in diam., bears N. $25\frac{3}{4}^{\circ}$ E., 50 lk .
dist., mkd. BT. No record of this bearing tree.

A ponderosa pine, 14 ins. in diam., bears S. 49° E.,
60 lks. dist., scribing illegible. No record of
this bearing tree.

The $\frac{1}{4}$ sec. cor. of secs. 13 and 14, monumented with an
iron post, 1 in. in diam., firmly set, projecting 6 ins.
above the ground, with brass cap mkd.

$\frac{1}{4}$
S 14 | S 13
1969
1930

substantiated by:

A pinyon pine, 6 ins. in diam., bears N. $45\frac{1}{2}^{\circ}$ W.,
101 lks. dist., marked only with a blaze (record:
"A pinon, 4 ins. in diameter, marked $\frac{1}{4}$ S14BT, bears
N $56^{\circ}30'$ W, 98 links distant.").

from which a new bearing tree;

A pinyon pine, 6 ins. in diam., bears N. $31\frac{1}{2}^{\circ}$ E.,
82 lks. dist., mkd. $\frac{1}{4}$ S13 BT.

The cor. of secs. 11, 12, 13, and 14, monumented with an
iron post, 2 ins. in diam., firmly set, projecting 6 ins.

The Rehabilitation of a Number of Corner Monuments
Township 30 South, Range 18 East
Salt Lake Meridian, Utah

CHAINS

above the ground, and in a collar of stone, with brass cap mkd.

T30S R18E
S 11 | S 12
S 14 | S 13
1909
1930

substantiated by:

A pine, 18 ins. in diam., bears N. 47 1/2° E., 80 lks. dist., scribing illegible (record: "A pine, 14 ins. in diameter, marked T30SR18ES12BT, bears N 58°15' E, 80 links distant.").

A pine, 12 ins. in diam., bears S. 69 1/4° E., 125 lks. dist., scribing illegible (record: "A pine, 10 ins. in diameter, marked T30SR18ES13BT, bears S 67°45' E, 125 links distant.").

An aspen, 15 ins. in diam., bears S. 34 1/2° W., 63 lks. dist., mkd. T (record: "An aspen, 7 ins. in diameter marked T30SR18ES14BT, bears S 32°15' W, 63 links distant.").

An aspen, 17 ins. in diam., bears N. 71° W., 70 lks. dist., mkd. T (record: "An aspen, 7 ins. in diameter, marked T30SR18ES15BT, bears N 71° W, 73 links distant.").

The 1/4 sec. cor. of secs. 12 and 13, monumented with an iron post, 1 in. in diam., firmly set, projecting 20 ins. above the ground, and in a mound of stone, 3 ft. base, 14 ins. high, with brass cap mkd.

S 12
S 13
1909
1930

substantiated by:

A pine, 24 ins. in diam., bears N. 19° E., 17 lks. dist., scribing illegible (record: "A pine, 14 ins. in diameter, marked T30SR18ES16BT, bears N 19°45' E, 17 links distant.").

A pine, 20 ins. in diam., bears S. 55° W., 135 lks. dist., scribing illegible (record: "A pine, 10 ins. in diameter, marked T30SR18ES17BT, bears S 54°15' W, 135 links distant.").

The 1/4 sec. cor. of secs. 23 and 24, monumented with an iron post, 1 in. in diam., firmly set on bedrock and in a mound of stone, 3 1/2 ft. base, 30 ins. high, with brass cap mkd.

S 23
S 24
1909
1930

The Rehabilitation of a Number of Corner Monuments
Township 36 South, Range 18 East
Salt Lake Meridian, Utah

CHAINS

substantiated by:

A pinyon pine (dead) 8 ins. in diam., bears S. 30° E., 61 lks. dist., mkd. BT (record: "A juniper, 6 in. in diameter, marked $\frac{1}{4}$ S26BT, bears S 41°00' E, 71 links distant.").

A pinyon pine, 10 ins. in diam., bears N. 9° W., 100 lks. dist., mkd. $\frac{1}{4}$ S23 BT (record: "A pinon, 8 ins. in diameter, marked $\frac{1}{4}$ S23BT, bears N 8°00' W, 99 links distant.").

from which a new bearing tree,

A pinyon pine, 8 ins. in diam., bears S. 14 $\frac{1}{2}$ ° W., 99 lks. dist., mkd. $\frac{1}{4}$ S26BT.

The cor. of secs. 22, 23, 26, and 27, monumented with an iron post, 2 ins. in diam., firmly set, projecting 20 ins. above the ground, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.

T36S R18E
S 22 | S 23
S 27 | S 26
1969
1930

substantiated by:

A pinyon pine, 6 ins (record 2 ins.) in diam., bears N. 59° 15' E., 56 lks. dist., mkd. BT.

A pinyon pine, 9 ins. in diam., bears S. 29 $\frac{1}{4}$ ° E., 18 lks. dist., mkd. T36S R18E S26 BT (record: "A pinon, 8 ins. in diameter, marked T36SR18ES26BT, bears S 26°30' E, 18 links distant.").

A juniper, 6 ins. in diam., bears S. 43 $\frac{1}{4}$ ° W., 25 lks. dist., mkd. BT (record: "A juniper, 3 ins. in diamet marked 'BT' only, bears S 39°30' W, 26 links distant.").

A pinyon pine, 11 ins. in diam., bears N. 80 $\frac{1}{2}$ ° W., 28 lks. dist., mkd. T36S R18E S22 BT (record: "A pinon, 10 ins. in diameter, marked T36SR18ES22BT, bears N 82°15' W, 27 links distant.").

from which a new bearing tree,

A pinyon pine, 12 ins. in diam., bears S. 85 $\frac{1}{2}$ ° E., 18 lks. dist., mkd. T36S R18E S26 BT.

The $\frac{1}{4}$ sec. cor. of secs. 22 and 23, monumented with an iron post, 1 in. in diam., firmly set, projecting 8 ins. above the ground, and in a collar of stone, with brass cap mkd.

$\frac{1}{4}$
S 22 | S 23
1969
1930

11

The Rehabilitation of a Number of Corner Monuments
Township 36 South, Range 18 East
Salt Lake Meridian, Utah

CHAINS

substantiated by:

A pinyon pine, 10 ins. in diam., bears S. 19° E.,
45 lks. dist., mkd. $\frac{1}{4}$ S22 BT.

A pinyon pine, 14 ins. in diam., bears N. $8\frac{3}{4}^{\circ}$ W.,
73 lks. dist., mkd. BT.

record shows:

"A juniper, 3 ins. in diameter, marked 'BT' only,
bears S $63^{\circ}15'$ E, 77 links distant."

"A pinon, 6 ins. in diameter, marked $\frac{1}{4}$ S22BT, bears
N $26^{\circ}45'$ W, 44 links distant."

The cor. of secs. 14, 15, 22, and 23, monumented with an
iron post, 2 ins. in diam., firmly set, projecting 12 ins
above the ground, with brass cap mkd.

T36S R18E
S 15 | S 14
S 22 | S 23
1909
1930

substantiated by:

A pinyon pine, 18 ins. in diam., bears N. $19\frac{1}{2}^{\circ}$ E.,
46 lks. dist., mkd. T36S R18E S14 BT (record: "A
pinon, 15 ins. in diameter, marked T36SR18ES14BT,
bears N $18^{\circ}30'$ E, 52 links distant.").

A pinyon pine, 7 ins. in diam., bears S. $17\frac{3}{4}^{\circ}$ E.,
56 lks. dist., mkd. BT (record: "A pinon, 3 ins. in
diameter, marked 'BT' only, bears S $18^{\circ}00'$ E., 65
links distant.").

A pinyon pine, 5 ins. in diam., bears S. $52\frac{1}{4}^{\circ}$ W.,
1.19 chs. dist., mkd. BT (record: "A pinon, 3 ins.
in diameter, marked 'BT' only, bears S $49^{\circ}45'$ W,
56 links distant.").

raise a mound of stone, 3 ft. base, 2 ft. high, south of
the corner.

The $\frac{1}{4}$ sec. cor. of secs. 14 and 23, monumented with an
iron post, 1 in. in diam., firmly set, projecting 8 ins.
above the ground, with brass cap mkd.

$\frac{1}{4}$ S 14
S 23
1909
1930

substantiated by:

A pinyon pine, 12 ins. in diam., bears W. $65\frac{1}{2}^{\circ}$ E.,
79 lks. dist., mkd. $\frac{1}{4}$ S14 BT (record: "A pinon,
8 ins. in diameter, marked $\frac{1}{4}$ S14BT, bears N $68^{\circ}00'$ E,
72 links distant.").

The Rehabilitation of a Number of Corner Monuments
Township 36 South, Range 18 East
Salt Lake Meridian, Utah

CHAINS

A pinyon pine, 14 ins. in diam., bears S. $73\frac{1}{4}^{\circ}$ E.,
64 lks. dist., mkd. BT (record: "A pinon, 7 ins.
indiameter, marked $\frac{1}{4}$ S23BT, bears S $72^{\circ}00'$ W, 61 link
distant.").

General Description

The land area is rolling to rough and broken. Soil,
shallow sandy and rocky loam. Timber consists of pines,
juniper, and aspen; undergrowth, young trees, service-
berry, oak brush, and sagebrush.

Volume

#

R0585

CERTIFICATE OF SURVEY

I, Leo J. Woster, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 29th day of May, 1969, I have dependently resurveyed a portion of the east boundary and surveyed a portion of the subdivision lines of section 25, and the rehabilitation of a number of corner monuments of Township 36 South, Range 18 East of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

July 25, 1969
(Date)

Leo J. Woster
(Cadastral Surveyor)
Leo J. Woster

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

SUBMITTED FOR APPROVAL
Date JUL 28 1969

BUREAU OF LAND MANAGEMENT,
Washington, D. C.

The foregoing field notes of the dependent resurvey of a portion of the east boundary and the survey of a portion of the subdivision lines of section 25, and the rehabilitation of a number of corner monuments of Township 36 South, Range 18 East, Salt Lake Meridian, Utah

executed by Leo J. Woster

having been critically examined and found correct, are hereby approved.

MAR 9 1970
(Date)

Clark J. Linn
(Chief, Division of Engineering)
Chief, Division of Cadastral Survey

CERTIFICATE OF TRANSCRIPT

IFY That the foregoing transcript of the field notes of the above-described su, is copy of the original field notes

Blank

Page

Blank

Page

FIELD NOTES

OF THE
SURVEY OF A PORTION OF THE SUBDIVISION LINES
AND A LIMITED SURVEY OF A PORTION
OF THE SUBDIVISION LINES IN SECTIONS 18 AND 19 OF
TOWNSHIP 36 SOUTH, RANGE 19 EAST

Of the SALT LAKE Meridian,
the State of UTAH

EXECUTED BY


LEO J. WOSTER CADASTRAL SURVEYOR

Under special instructions dated May 29, 19 69, which provided for the surveys
conducted under Group Number 512, approved June 2, 1969,
assignment instructions dated June 2, 19 69.

Survey commenced June 4, 19 69
Survey completed June 18, 19 69

INDEX DIAGRAM

Transit _____ Date _____ Range _____ East _____

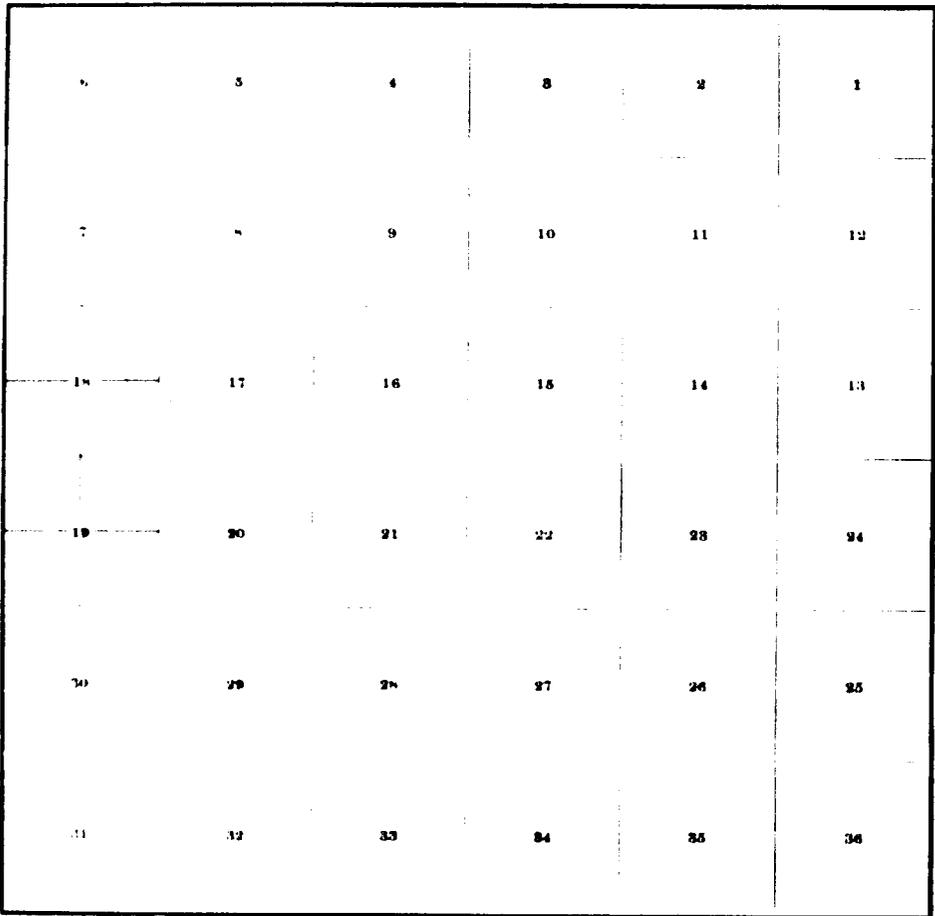

Township 36 South, Range 19 East
Salt Lake Meridian, Utah

CHAINS

Township 36 South, Range 19 East. The west boundary was surveyed by Robert C. Yundt, Cadastral Engineer, in 1930, as shown upon the official township plat of Township 36 South, Range 18 East, accepted June 10, 1937. A portion of the west boundary was dependently resurveyed concurrently with this group, as shown in the field note record of the east boundary of Township 36 South, Range 18 East.

The following field notes are those of the survey of a portion of the subdivision lines and a limited survey of a portion of the subdivision lines in sections 18 and 19 of Township 36 South, Range 19 East, of the Salt Lake Meridian, Utah.

The survey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1947, and the special instructions dated May 29, 1969.

The directions of all lines of this survey were determined by direct altitude observations on the sun for azimuth, and carried forward by normal transit traverse.

The geographic position of the southeast corner of section 19 is: Latitude 37° 38.1' N., Longitude 109° 51.4' W., as determined by scaling on a reliable U. S. Geological Survey Topographic map, Elk Ridge 3 NE., Utah, 1954.

The magnetic declination as obtained by reference to the above topographic map, is: 15° E.

The Survey of a Portion
of the Subdivision Lines
Township 36 South, Range 19 East
Salt Lake Meridian, Utah

Beginning at the corner of Tps. 36 S., Rs. 18 and 19 E., secs. 19, 24, 25 and 30, monumented with an iron post, 2 ins. in diam., firmly set, projecting 12 ins. above the ground, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.

T36S
R18E | R19E
S 24 | S 19
S 25 | S 30
1969
1930

No evidence of the original bearing trees.

No suitable accessories available.

EAST, between secs. 19 and 30,

Descend over NE. slope, through scattering timber.

30.25 Draw, drains NW., ascend over SW. slope.

40.00 The point for the 1/4 sec. cor. of secs. 19 and 30.

Set an iron post, 30 ins. long, 2½ ins. in diam., 8 ins. in the ground, and in a mound of stone, 3 ft. base, to top, with brass cap mkd.

The Survey of a Portion
of the Subdivision Lines
Township 36 South, Range 19 East
Salt Lake Meridian, Utah

CHAINS

T36S R19E

$$\frac{1}{4} \frac{S 19}{S 30}$$

1969

from which

A pine, 10 ins. in diam., bears N. $44\frac{1}{4}^{\circ}$ E., 96 lks.
dist., mkd. T36S R19E $1/4$ S19 BT.

A pine, 18 ins. in diam., bears S. $39\frac{1}{2}^{\circ}$ W., 1.32 chs
dist., mkd. T36S R19E $1/4$ S30 BT.

Ascend over SW. slope.

80.00 The point for the cor. of secs. 19, 20, 29 and 30.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 12 ins.
in the ground, and in a mound of stone, 3 ft. base, to
top, with brass cap mkd.

T36S R19E

$$\frac{S 19 | S 20}{S 30 | S 29}$$

1969

from which

A pine, 10 ins. in diam., bears N. $18\frac{1}{2}^{\circ}$ E., 54 lks.
dist., mkd. T36S R19E S20 BT.

A pine, 12 ins. in diam., bears S. 65° E., 45 lks.
dist., mkd. T36S R19E S29 BT.

A pine, 12 ins. in diam., bears S. $43\frac{1}{2}^{\circ}$ W., 10 lks.
dist., mkd. T36S R19E S30 BT.

A pine, 8 ins. in diam., bears N. 56° W., 110 lks.
dist., mkd. T36S R19E S19 BT.

N. $0^{\circ} 03'$ W., between secs. 19 and 20.

Ascend over rolling SW. slope, through scattering timber.

46.00 The point for the $1/4$ sec. cor. of secs. 19 and 20.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 20 ins.
in the ground, and in a collar of stone, with brass cap
mkd.

T36S R19E

$$\frac{1}{4} \frac{S 19 | S 20}{S 30 | S 29}$$

1969

set a wooden post, $6\frac{1}{2}$ ft. long, alongside the corner.

from which

A pine, 14 ins. in diam., bears N. $45\frac{1}{4}^{\circ}$ E., 2.22 chs
dist., mkd. T36S R19E $1/4$ S20 BT.

The Survey of a Portion
of the Subdivision Lines
Township 36 South, Range 19 East
Salt Lake Meridian, Utah

CHAINS

59.50 Draw, drains W-NW., slope changes to W. slope.

76.00 Enter timber, bears E. and W.

79.30 Road, bears W-NW. and E-SE.

80.00 The point for the cor. of secs. 17, 18, 19 and 20.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 23 ins. in the ground, with brass cap mkd.

T36S R19E	
S 13	S 17
S 19	S 20
1969	

set a wooden guard post, 5 ft. long, alongside the corner from which

A pine, 12 ins. in diam., bears N. 42° E., 1.60 chs. dist., mkd. T36S R19E S17 BT.

A pine, 12 ins. in diam., bears S. $55\frac{1}{4}^\circ$ W., 1.54 chs. dist., mkd. T36S R19E S19 BT.

A pine, 10 ins. in diam., bears N. 51° W., 1.20 chs. dist., mkd. T36S R19E S18 BT.

S. $89^\circ 52'$ W., between secs. 18 and 19.

Descend over W. to NW. slope, through timber.

1.40 Road, bears W-NW. and E-SE.: thence through scattering timber.

1.90 The point for the 1/4 sec. cor. of secs. 18 and 19.

Set an iron post, 30 ins. long, $2\frac{1}{4}$ ins. in diam., 24 ins. in the ground, with brass cap mkd.

T36S R19E	
S 13	
S 19	
1969	

from which

A pine, 9 ins. in diam., bears S. 14° E., 1.18 chs. dist., mkd. T36S R19E 1/4 S18 BT.

A pine, 14 ins. in diam., bears N. 8° W., 95 lks. dist., mkd. T36S R19E 1/4 S18 BT.

79.00 Draw, drains S-SW.

80.00 Intersect the west boundary of the township, the cor. of secs. 13, 18, 19, 24, monumented by an iron post, 2 ins. in diam., firmly set, projecting 15 ins. above the ground, and in a mound of stone, 2 ft. base, with brass cap mkd.

T36S	
R18E	R19E
S 13	S 18
S 24	S 19
1969	
1930	

The Survey of a Portion
of the Subdivision Lines
Township 30 South, Range 19 East
Salt Lake Meridian, Utah

HAINS

substantiated by:

A pine, 14 ins. in diam., bears N. $35\frac{3}{4}^{\circ}$ E., 2.39 chs
Dist. mkl. T3S R10E S13 BT (record: "A yellow pine,
14 ins. in diameter, marked T3S R10E S13 BT, bears N
 $35^{\circ}15'$ E., 291 links distant.").

A pine, 14 ins. in diam., bears S. 43° W., 101 lks.
Dist. mkl. T3S (the remaining portion illegible)
(record: "A yellow pine, 14 ins. in diameter, marked
T3S R10E S13 BT, bears S $30^{\circ}3'$ W. 98 links distant.")

A pine, 17 ins. in diam., bears N. $40\frac{1}{2}^{\circ}$ W., 1.87 chs
Dist. mkl. T3S R20E X S13 BT. (record: "A yellow
pine, 17 ins. in diameter, marked T3S R10E S13 BT,
bears N $34^{\circ}15'$ W, 214 links distant.").

From the cor. of secs. 17, 18, 19, and 20.

N. 5° E. W. between secs. 17 and 18.

Descend over W. slope, through scattering timber.

The point for the $1/4$ sec. cor. of secs. 17 and 18.

Set a regulation brass tablet, $3\frac{1}{2}$ ins. in diam., 3 in.
diam. steel flush with the surface of bedrock, with brass
tablet mkl.

T3S R10E

S 13 | S 14
1 lks

raise a mound of stone, 3 ft. base, $2\frac{1}{2}$ ft. high, W. of
corner.

From which:

A pine, 14 ins. in diam., bears S. $50\frac{1}{4}^{\circ}$ E., 51 lks.
Dist. mkl. T3S R10E $1/4$ S13 BT.

A pine, 14 ins. in diam., bears S. $37\frac{1}{2}^{\circ}$ W., 2.13 chs
Dist. mkl. T3S R10E $1/4$ S13 BT.

Descend over broken N-NE. slope.

Draw a line NW., ascend over W. slope.

The point for the cor. of secs. 17, 18, 19, and 20.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 22 ins.
in the ground, with brass cap mkl.

T3S R10E

S 13 | S 14
S 13 | S 17
1 lks

raise a mound of stone, 3 ft. base, 3 ft. high, N. of the
corner.

From which:

310

The Survey of a Portion
of the Subdivision Lines
Township 36 South, Range 19 East
Salt Lake Meridian, Utah

CHAINS

A pine, 7 ins. in diam., bears N. $76\frac{1}{4}^{\circ}$ E., 73 lks. dist., mkd. T36S R19E S6 BT.

A stone-in-place, 6x6 ft. base, 3 ft. high, bears N. 4° W., 13 lks. dist., mkd.

|
B/O
|

S. $89^{\circ} 48'$ W., between secs. 7 and 18.

Descend over broken SW. slope.

1.30 Draw, drains NW., ascend over NE. slope.

18.80 Spur, slopes N., descend over N-NW. slope.

30.00 Draw, drains N.

38.70 Spur, slopes N-NE., descend over NW. slope.

39.96 The point for the $1/4$ sec. cor. of secs. 7 and 18.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 21 ins. in the ground, with brass cap mkd.

T36S R19E
 $\frac{1}{4}$ $\frac{S 7}{S 18}$
1939

raise a mound of stone, 3 ft. base, $2\frac{1}{2}$ ft. high, N. of the corner.

from which

A pine, 6 ins. in diam., bears S. 25° W., 15 lks. dist., mkd. T36S R19E $1/4$ S18 BT.

A pine, 6 ins. in diam., bears N. $58\frac{1}{4}^{\circ}$ W., 12 lks. dist., mkd. T36S R19E $1/4$ S7 BT.

Continue to descend over NW. slope.

63.00 Draw in Peavine Canyon, drains NE., ascend over NE. slope.

79.92 Intersect the west boundary of the township, the cor. of secs. 7, 12, 13, and 18, monumented by an iron post, 2 ins. in diam., firmly set, projecting 10 ins. above the ground, with brass cap mkd.

T36S
R18E | R19E
 $\frac{S 12}{S 13}$ | $\frac{S 7}{S 18}$
1939
1930

substantiated by:

An aspen, 10 ins. in diam., bears N. $32\frac{3}{4}^{\circ}$ E., 20 lks. dist., scribing illegible (record: "An aspen, 5 ins. in diameter, marked T36SR19ES7BT, bears N $31^{\circ}45'$ E, 28 links distant.").

The Survey of a Portion
of the Subdivision Lines
Township 36 South, Range 19 East
Salt Lake Meridian, Utah

CHAINS

An aspen, 12 ins. in diam., bears S. 20° E., 20 lks. dist., mkd. T36S R19E S18 BT, (record: "An aspen, 6 ins. in diameter, marked T36SR19ES18BT, bears S 13°45' E, 22 links distant.").

An aspen, 10 ins. in diam., bears S. 79 $\frac{3}{4}$ ° W., 29 lks dist., mkd. T36S R18E S13 BT (record: "An aspen, 5 ins. in diameter, marked T36SR18ES13BT, bears S 31°45' W, 30 links distant.").

An aspen, 10 ins. in diam., bears N. 37 $\frac{3}{4}$ ° W., 22 lks dist., scribing illegible (record: "An aspen, 7 ins. in diameter, marked T36SR18ES12BT, bears N 47°15' W, 22 links distant.").

A Limited Survey of a Portion of
the Subdivision Lines in Sections 18 and 19
Township 36 South, Range 19 East
Salt Lake Meridian, Utah

Thence, in sec. 19,

From the 1/4 sec. cor. of secs. 19 and 30.

N. 0° 03' W., on the meridional center line of sec. 19.

40.00 Intersect the latitudinal center line; the point for the center 1/4 sec. cor. of sec. 19.

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. in diam., 18 ins. in the ground, and in a mound of stone, 2 $\frac{1}{2}$ ft. base, to top, with brass cap mkd.

T36S R19E
C 1/4
S 19
1969

from which

A pine, 8 ins. in diam., bears N. 25 $\frac{1}{2}$ ° E., 1.92 chs. dist., mkd. C 1/4 S19 BT.

A pine, 11 ins. in diam., bears S. 44 $\frac{1}{2}$ ° E., 2.47 chs dist., mkd. C 1/4 S19 BT.

79.92 The 1/4 sec. cor. of secs. 18 and 19.

From the 1/4 sec. cor. of secs. 19 and 20,

S. 89° 59' W., on the latitudinal center line of sec. 19.

40.01 Intersect the meridional center line; the center 1/4 sec. cor. of sec. 19.

80.04 Intersect the west boundary of the township, the 1/4 sec. cor. of secs. 19 and 24, monumented by an iron post, 1 in. in diam., firmly set, projecting 2 ins. above the ground, with brass cap mkd.

S 24 | $\frac{1}{4}$ S 19
1969
1930

331

A Limited Survey of a Portion of
the Subdivision Lines in Sections 18 and 19
Township 30 South, Range 12 East
Salt Lake Meridian, Utah

CHAINS

substantiated by:

A mound of stone, 2 $\frac{1}{2}$ ft. base, 2 ft. high. W. of the corner; restore same.

A pine, 14 ins. in diam., bears S. 82 $\frac{1}{2}$ ° W., 27 lks. dist., scribing illegible (record: "A long leaf pine 12 ins. in diameter, marked 1/4S24BT. bears N. 15° W, 26 links distant.").

from which a new bearing tree,

A pine, 10 ins. in diam., bears N. 57° E., 13 lks. dist., mkd. T36S R19E 1/4 S19 BT.

Thence, in sec. 18,

From the 1/4 sec. cor. of secs. 18 and 19.

N. 0° 01' W., on the meridional center line of sec. 18.

Over rolling western slope, through scattering timber.

12.30 Road, bears E. and W.

39.98 Intersect the latitudinal center line: the point for the center 1/4 sec. cor. of sec. 18.

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. in diam., 24 ins. in the ground, with brass cap mkd.

T36S R19E
C 1/4
S 18
1909

from which

A pine, 11 ins. in diam., bears S. 21 $\frac{3}{4}$ ° W., 59 lks. dist., mkd. C 1/4 S18 BT.

A pine, 12 ins. in diam., bears N. 17 $\frac{3}{4}$ ° W., lks. dist., mkd. C 1/4 S18 BT.

79.91 The 1/4 sec. cor. of secs. 7 and 18.

From the 1/4 sec. cor. of secs. 17 and 18,

S. 89° 50' W., on the latitudinal center line of sec. 18.

Descend over W. slope, through scattering timber.

48.02 Intersect the meridional center line; the center 1/4 sec. cor. of sec. 18.

77.80 Road, bears NW. and SE.

79.99 Intersect the west boundary of the township: the 1/4 sec. cor. of secs. 13 and 18, monumented with an iron post, 24 ins. in diam., firmly set, projecting 5 ins. above the ground, set as described in the official record of the dependent resurvey of a portion of the east boundary of Tp. 30 S., R. 18 E., executed concurrently with this group, with brass cap mkd.

A Limited Survey of a Portion of
the Subdivision Lines in Sections 18 and 19
Township 30 South, Range 10 East
Salt Lake Meridian, Utah

MAINS

T30S
R10E | R10E
↓
S 18 | S 19
1/4

substantiated by:

A pine, 2 ins. in diam., bears N. 44 $\frac{1}{2}$ ° W., 1.20 chs
dist. to T30S R10E 1/4 S18 BT.

General Description

The land area of section 18 has a general northwestern exposure and drainage into Peavine Canyon, whereas section 19 has western to southwestern exposure and drainage into Fern Canyon. The land is rolling to broken, except along the walls of the canyons where the area becomes rough and steep. Soil, shallow sandy and rocky loam. Timber consists of pines, juniper, and aspen; undergrowth, service berry, oak brush, young trees and sage brush.

CERTIFICATE OF SURVEY

I, Leo J. Woster, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 29th day of May, 1969, I have surveyed a portion of the subdivision lines and made a limited survey of a portion of the subdivision lines in sections 18 and 19 of Township 36 South, Range 19 East

of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

July 25, 1969 (Date)

Leo J. Woster (Cadastral Surveyor)

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

SUBMITTED FOR APPROVAL Date JUL 28 1969

BUREAU OF LAND MANAGEMENT, Washington, D. C.

The foregoing field notes of the survey of a portion of the subdivision lines and a limited survey of a portion of the subdivision lines in sections 18 and 19 of Township 36 South, Range 19 East, Salt Lake Meridian, Utah.

executed by Leo J. Woster

having been critically examined and found correct, are hereby approved.

MAR 9 1970 (Date)

Chief, Division of Engineering

Chief, Division of Cadastral Survey CERTIFICATE OF TRANSCRIPT

I CERTIF the foregoing transcript of the field notes of the above-de surveys in true copy of the original field notes.

(Dat

(Chief, Division o ering)

Blank

Page

Blank

Page

ORIGINAL
FIELD NOTES

OF THE

DEPENDENT RESURVEY

OF

THE SOUTH BOUNDARY (THIRD STANDARD PARALLEL NORTH)

THE EAST BOUNDARY

THE NORTH BOUNDARY

AND

THE SUBDIVISIONAL LINES

OF

TOWNSHIP 13 NORTH, RANGE 9 WEST

Of the SALT LAKE Meridian,

In the State of UTAH

EXECUTED BY

FRED R. CHAPPELL

SUPERVISORY CADASTRAL SURVEYOR

Under special instructions dated FEBRUARY 20, 19 67, which provided for the surveys

included under Group Number 491, approved FEBRUARY 24, 1967,

and assignment instructions dated MAY 26, 19 67.

Survey commenced SEPTEMBER 30, 19 67

Survey completed MAY 9, 19 68

INDEX DIAGRAM

Township 13 NORTH, Range 9 WEST,

16	15	14	14	13	12
6	57 8	45 4	37 8	30 2	22 1 11
56	56	45	37	29	21
7	55 8	44 9	36 10	28 11	21 12 10
54	54	43	36	28	21
18	52 17	43 16	35 15	27 14	20 13 9
52	51	42	34	26	19
19	50 20	41 21	33 22	25 23	19 24 9
50	49	40	32	25	19
30	48 29	39 28	32 27	24 26	18 25 8
47	47	39	31	23	18
31	46 32	38 33	30 34	22 35	17 36 7
6	5	4	3	3	2

Dependent Resurvey, Township 13 North, Range 9 West

CHAINS

The South boundary (Third Standard Parallel North) was surveyed by Joseph Gorkinski in 1871. The West boundary was surveyed by G. V. M. Boutelle in 1872. The East and North boundaries and a portion of the subdivisional lines were surveyed by G. V. M. Boutelle in 1873. A portion of the subdivisional lines were surveyed by E. W. Koeber in 1887. The West boundary was concurrently resurveyed by Fred R. Chappell. The following field notes are those of the dependent resurvey of the South boundary (Third Standard Parallel North), the East boundary, the North boundary and the subdivisional lines of Township 13 North, Range 9 West.

The survey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1947, and special instructions dated February 20, 1967.

Before restoring the corners, the lines of the original survey were retraced and diligent search made for any evidence of the original corner, bearing trees or other calls of the original field note record.

The rules of proportionate measurement were applied to ascertain the position of the lost corners, but not until exhausting every reasonable possibility of finding direct evidence for the control of each particular corner.

The distances were determined by chaining where possible otherwise by triangulation or traverse. On lines run by triangulation or traverse the distances to topography are approximate.

Note: The east two miles of this township are solid private land. Corners along the East boundary, the east two miles of the North and South boundaries, are remonumented with iron post-brass cap markers, as they were used for control in re-establishing corner positions in the public land of this township, and anticipated future surveys of public lands in adjoining townships. Interior section and $\frac{1}{4}$ section corners on private land were not remonumented.

The lines of this survey were determined by reference to true meridians established on line by hour angle observations on Polaris and altitude observations on the sun. The lines were carried forward by sustained angulation being supplemented by other hour angle observations on Polaris taken throughout the progress of the survey.

The geographic position for the southeast corner of the township is at Latitude $41^{\circ} 48' 16.4''$ N. and Longitude $112^{\circ} 48' 07.7''$ W., as computed from section line ties to U.S.G.S. Triangulation Station "Hardup" at Latitude $41^{\circ} 50' 04.445''$ N. and Longitude $113^{\circ} 01' 52.390''$ W., located N. $75^{\circ} 28' W.$, 15.36 chs. dist. from the $\frac{1}{4}$ section corner of sections 19 and 30, Township 13 North, Range 10 West.

Dependent Resurvey, Township 13 North, Range 9 West

CHAINS

The magnetic declination was read at several stations and the average of these readings was found to be 17° 15' East.

Dependent Resurvey of the South Boundary (Third Standard Parallel North), Township 13 North, Range 9 West.

Reestablishment of the Survey Executed by Joseph Gorkinski in 1871.

Beginning at the standard cor. of Tps. 13 N., Rs. 8 and 9 W., at end of fence from west. This point is harmoniously related with existing original cors. and is accepted as the best available evidence of the position of the original cor.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground, and in a mound of stone, 5 ft. base to top, with brass cap mkd.

SC
T13N
R9W R8W
S36 | S31
1967

Thence,

S. 89° 43' W., along the S. bdy. of sec. 36.

Over gently rolling grass land along fence line.

41.60

Point for the standard ¼ sec. cor. of sec. 36 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

SC
T13N R9W
¼ S36
1967

Continue over gently rolling grass land along fence line.

83.20

Point for the standard cor. of secs. 35 and 36 at cor. of fences bearing W. and S. and E. It is accepted as the best available evidence of the position of the original cor.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground, with brass cap mkd.

Dependent Resurvey of the South Boundary (Third Standard Parallel North), Township 13 North, Range 9 West

CHAINS

SC
T13N R9W
S35|S36
T12N
1967

Land, gently rolling grass land.
Soil, sandy clay.
Timber, none.
Undergrowth, grass.

S. 89° 13' W., along the S. bdy. of sec. 35.

Over nearly level grass land and along fence line.

40.32

Point for the standard $\frac{1}{4}$ sec. cor. of sec. 35 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, with brass cap mkd.

SC
T13N R9W
 $\frac{1}{4}$ S35
1967

Set a steel fence post, 6 ft. long, 2 ft. in the ground alongside the iron post.

Continue over nearly level grass land and along fence line.

80.64

Point for the standard cor. of secs. 34 and 35 at cor. of fences bearing E., S. and N. 5° E. It is accepted as the best available evidence of the position of the original cor.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

SC
T13N R9W
S34|S35
T12N
1967

Land, nearly level grass land.
Soil, sandy clay.
Timber, none.
Undergrowth, grass.

N. 89° 23' W., along the S. bdy. of sec. 34.

Over nearly level desert land through sagebrush undergrowth.

31.70

Gravel road to Locomotive Springs from Snowville, bears

Dependent Resurvey of the South Boundary (Third Standard Parallel North), Townsh. 13 North, Range 9 West

HAINES

40.55 The standard $\frac{1}{2}$ sec. cor. of sec. 34, monumented with a sandstone, 18x12x6 ins., firmly set and plainly mkd. $\frac{1}{2}$ on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

SC
T13N R9W

$\frac{1}{2}$ S34

T12N
1967

Bury original stone cor. alongside iron post.

Set a steel fence post, 6 ft. long, 2 ft. in the ground alongside the iron post.

N. 88° 05' W., beginning new measurement.

Continue over nearly level desert land through sagebrush undergrowth.

40.29 The standard cor. of secs. 33 and 34, monumented with a limestone, 12x8x4 ins., firmly set and plainly mkd. 3 notches on E. and W. edges and SC on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

SC
T13N R9W

S33|S34

T12N
1967

Bury original stone cor. alongside iron post.

Bury broken glass at the base of the iron post.

Land, nearly level desert.

Soil, clay.

Timber, none.

Undergrowth, sagebrush.

S. 89° 54' W., along the S. bdy. of sec. 33.

Over level desert land through sagebrush undergrowth.

19.70 Trail road, bears N. 26° E. and S. 26° W.

40.53 Point for the standard $\frac{1}{2}$ sec. cor. of sec. 33 at proportionate dist.; there is no remaining evidence of the original cor.

Dependent Resurvey of the South Boundary (Third Standard Parallel North), Township 13 North, Range 9 West

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

SC
T13N R9W

$\frac{1}{4}$ S33

T12N

1967

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.

81.06

The standard cor. of secs. 32 and 33, monumented with a limestone, 16x10x6 ins., firmly set and plainly mkd. 4 notches on E. and 2 on W. edges, and SC on N. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

SC
T13N R9W

S32|S33

T12N

1967

Set a steel fence post, 6 ft. long, 2 ft. in the ground alongside the iron post.

Bury original stone cor. alongside iron post.

Land, nearly level desert.

Soil, clay.

Timber, none.

Undergrowth, sagebrush.

N. $89^{\circ} 53'$ W., along the S. bdy. of sec. 32.

Over nearly level desert land through sagebrush undergrowth.

28.60 Trail road, bears N. 12° E. and S. 12° W.

30.95 Trail road, bears N. 59° E. and S. 59° W.

35.75 Trail road, bears N. 36° E. and S. 36° W.

36.60 Trail road, bears N. 10° E. and S. 10° W.

40.26 Point for standard $\frac{1}{4}$ sec. cor. of sec. 32 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

Dependent Resurvey of the South Boundary (Third Standard Parallel North), Township 13 North, Range 9 West

CHAINS

SC
T13N R9W
½ S32

T12N
1967

68.20 Fence, bears N. 3° W. and S. 3° E.

80.52 The standard cor. of secs. 31 and 32, monumented with a limestone, 16x10x6 ins., firmly set and plainly mkd. 5 notches on E. and 1 on W. edges and SC on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

SC
T13N R9W
S31|S32

T12N
1967

Set a steel fence post, 6 ft. long, 2 ft. in the ground alongside the iron post.

Bury original stone cor. alongside iron post.

Land, nearly level desert.

Soil, clay.

Timber, none.

Undergrowth, sagebrush.

N. 89° 25' W., along the S. bdy. of sec. 31.

Over level desert land through grass undergrowth.

40.73 Point for the standard ½ sec. cor. of sec. 31 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground with brass cap mkd.

SC
T13N R9W
½ S31

T12N
1967

Set a steel fence post, 6 ft. long, 2 ft. in the ground alongside the iron post.

81.46 The standard cor. of T. 13 N., Rs. 9 and 10 W., monumented with an iron post, 2½ ins. diam., with brass cap mkd.

SC
T13N
R10W R9W
S36|S31

T12N
1967

Dependent Resurvey of the South Boundary (Third Standard Parallel North), Township 13 North, Range 9 West

CHAINS

Land, level desert.
Soil, clay.
Timber, none.
Undergrowth, grass.

Dependent Resurvey of the E. Bdy.,
T. 13 N., R. 9 W.

Reestablishment of the Survey Executed by
G. V. M. Boutelle in 1873.

From the standard cor. of Tps. 13 N., Rs. 8 and 9 W.,
hereinbefore described.

N. 0° 09' W., bet. secs. 31 and 36.

Over level cultivated land.

22.50 Leave cultivated land, bears NE. and SW.; enter sagebrush
asc. 40 ft. over SE. slope.

40.67 Point for the 1/2 sec. cor. of secs. 31 and 36 at propor-
tionate dist.; there is no remaining evidence of the
original cor.

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins.
in the ground, with brass cap mkd.

T13N
R9W R8W
1/2
S36 | S31
1967

Set steel fence post, 6 ft. long, 2 ft. in the ground,
alongside iron post.

Asc. over rolling desert land.

81.34 The cor. of secs. 25, 30, 31 and 36, monumented with a
pine post, partially decayed, 3x3 ins., 24 ins. long,
dimly scribed on one side.

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 18 ins.
in the ground, and in a collar of stone, with brass cap
mkd.

T13N
R9W R8W
S25 | S30
S36 | S31
1967

Dependent Resurvey of the East Boundary,
T. 13 N., R. 9 W.

CHAINS

Set steel fence post, 6 ft. long, 18 ins. in the ground, alongside iron post.

Bury original pine post cor. alongside iron post.

Land, level cultivated and rolling.
Soil, sandy loam.
Timber, none.
Undergrowth, sagebrush.

N. 0° 44' W., bet. secs. 25 and 30.

Over rolling desert land through sagebrush undergrowth; asc. 35 ft. over SW. slope.

- 11.00 Ridge, bears N. 80° W. and S. 80° E.; desc. 160 ft. over rolling NE. slope.
- 12.60 Leave sagebrush, enter grass.
- 40.58 Point for the $\frac{1}{2}$ sec. cor. of secs. 25 and 30 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T13N
R9W R8W
 $\frac{1}{2}$
S25|S30
1967

Set steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.

Thence over level grass land.

- 46.90 Enter cultivated land.
- 81.16 Point for the cor. of secs. 19, 24, 25 and 30, as shown me by adjacent land owners and recognized as being a perpetuation of the original cor. point, marked by a small mound of stone.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T13N
R9W R8W
S24|S19
S25|S30

1967

Set steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.

Land, rolling desert and level farm land.
Soil, sandy clay.
Timber, none.
Undergrowth, sagebrush and grass.

Dependent Resurvey of the East Boundary,
T. 13 N., R. 9 W.

CHAINS		
40.44	<p>N. 1° 06' W., bet. secs. 19 and 24.</p> <p>Over nearly level cultivated land.</p> <p>Point for the $\frac{1}{2}$ sec. cor. of secs. 19 and 24 at proportionate dist., falls in cultivated land. There is no remaining evidence of the original cor.</p> <p>Set an iron post, 2½ ins. diam., 6 ins. long, 24 ins. below ground, with brass cap mkd.</p> <p style="text-align: center;">T13N R9W R8W ½ S24 S19 1967</p> <p>Continue over cultivated land.</p>	
80.88	<p>Point for the cor. of secs. 13, 18, 19 and 24 at proportionate dist., falls on private cultivated land. There is no remaining evidence of the original cor.</p> <p>Set an iron post, 6 ins. long, 2½ ins. diam., 24 ins. below ground, with brass cap mkd.</p> <p style="text-align: center;">T13N R9W R8W S13 S18 S24 S19 1967</p> <p>Land, level farm. Soil, sandy clay. Timber, none. Undergrowth, none.</p>	
40.44	<p>N. 1° 06' W., bet. secs. 13 and 18.</p> <p>Over level private cultivated land.</p> <p>Point for the $\frac{1}{2}$ sec. cor. of secs. 13 and 18 at proportionate dist., falls on private cultivated land and is not monumented. There is no remaining evidence of the original cor.</p> <p>Continue over cultivated land.</p>	
64.67	<p>Gravel road, Snowville to Locomotive Springs, bears N. 42° 46' E. and S. 42° 46' W.</p>	
65.02	<p>Point selected for witness point.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 28 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T13N R9W R8W S13 S18 WP 1967</p>	

Dependent Resurvey of the East Boundary,
T. 13 N., R. 9 W.

CHAINS

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.

Continue over private cultivated land.

80.88 The cor. of secs. 7, 12, 13 and 18, monumented with a pine post, 3x3 ins., 36 ins. long, dimly scribed on one face, and partially decayed, set in a mound of stone, 4 ft. base, 2 ft. high.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.

T13N
R9W R8W

S12|S7
S13|S18

1967

Bury original pine post cor. alongside iron post.

From this cor., the southwest cor. of metal building, bears S. 80° 45' E., 5.35 chs. dist.

Land, level farm.
Soil, sandy loam.
Timber, none.
Undergrowth, none.

N. 0° 28' E., bet. secs. 7 and 12.

Over level desert land through sagebrush and shadscale.

39.56 Point for the ¼ sec. cor. of secs. 7 and 12 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T13N
R9W R8W

¼
S12|S7

1967

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Dependent Resurvey of the East Boundary,
T. 13 N., R. 9 W.

CHAINS

Continue over level land through shadscale and sagebrush undergrowth.

79.12

The cor. of secs. 1, 6, 7 and 12, monumented with a pine post, 2x2 ins., 36 ins. long, dimly scribed S12 on one face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

T13N
R9W R8W

S1|S6
S12|S7

1967

Bury original pine post cor. alongside iron post.

Cor. located 84 lks. W. of fence line; bears N.
1° 30' W.

Land, nearly level desert.

Soil, clay.

Timber, none.

Undergrowth, shadscale and sagebrush.

N. 0° 27' W., bet. secs. 1 and 6.

Over nearly level land through sagebrush and shadscale undergrowth along W. side of fence line.

41.22

The ½ sec. cor. of secs. 1 and 6, monumented with a sandstone, 4x4x2 ins., mkd. (X), in small mound of stone. No remaining evidence of the original pine post.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 23 ins. in the ground, and in a collar of stone, with brass cap mkd.

T13N
R9W R8W

½
S1|S6

1967

Bury original stone cor. alongside iron post.

N. 0° 37' E., beginning new measurement.

Continue over level desert land through shadscale and sagebrush undergrowth, and along fence line.

Dependent Resurvey of the East Boundary,
T. 13 N., R. 9 W.

CHAINS

- 42.65 The cor. of Tps. 13 and 14 N., Rs. 8 and 9 W., at cor. of fences, from N., S., E., W., and SW. It is accepted as the best available evidence of the position of the original cor. point.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T14N
R9W R8W

S36 | S31
S1 | S6

T13N
R9W R8W

1967

Land, level desert.

Soil, clay.

Timber, none.

Undergrowth, sagebrush and shadscale.

Dependent Resurvey of the North Boundary,
T. 13 N., R. 9 W.

Reestablishment of the Survey Executed
by G. V. M. Boutelle in 1873.

From the cor. of Tps. 13 and 14 N., Rs. 8 and 9 W., hereinbefore described,

S. $89^{\circ} 49'$ W., bet. secs. 1 and 36.

Over level desert land through shadscale and sagebrush undergrowth, and along fence line.

- 40.75 Point for the $\frac{1}{4}$ sec. cor. of secs. 1 and 36 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T14N R9W

$\frac{1}{4}$ S36
S1

T13N

1967

Set steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.

Continue over nearly level land and along fence line.

- 80.46 Cor. of fences, bearing E. and N. $1^{\circ} 04'$ W., bears North 5 lks. dist.; leave fence line.

Dependent Resurvey of the North Boundary,
T. 13 N., R. 9 W.

CHAINS	
81.50	<p>Point for the cor. of secs. 1, 2, 35 and 36, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T14N R9W $\begin{array}{r l} \hline \text{S35} & \text{S36} \\ \hline \text{S2} & \text{S1} \\ \hline \end{array}$ T13N 1967</p> <p>Set steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.</p> <p>Land, nearly level desert. Soil, clay. Timber, none. Undergrowth, sagebrush and shadscale.</p>
40.75	<p>S. 89° 49' W., bet. secs. 2 and 35.</p> <p>Over nearly level desert land through shadscale and sagebrush undergrowth.</p> <p>Point for the ¼ sec. cor. of secs. 2 and 35 at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T14N R9W $\begin{array}{r l} \hline \frac{1}{4} & \text{S35} \\ \hline & \text{S2} \\ \hline \end{array}$ T13N 1967</p> <p>Set steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.</p> <p>Continue over nearly level desert.</p>
51.40	Trail road, bears N. and S.
75.30	Trail road, bears N. and S.
81.50	<p>Point for the cor. of secs. 2, 3, 34 and 35 at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T14N R9W $\begin{array}{r l} \hline \text{S34} & \text{S35} \\ \hline \text{S3} & \text{S2} \\ \hline \end{array}$ T13N R9W 1967</p>

Dependent Resurvey of the North Boundary,
T. 13 N., R. 9 W.

CHAINS

Set steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.

Land, nearly level desert.
Soil, clay.
Timber, none.
Undergrowth, sagebrush and shadscale.

S. 89° 49' W., bet. secs. 3 and 34.

Over level desert land through sagebrush and shadscale undergrowth.

40.75 Point for the $\frac{1}{2}$ sec. cor. of secs. 3 and 34 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T14N R9W

$\frac{1}{2}$ $\frac{S34}{S3}$

T13N R9W

1967

Set steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.

Continue over level desert land.

77.20 Trail road, bears N. 10° W. and S. 10° E.

81.50 Point for the cor. of secs. 3, 4, 33 and 34 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T14N R9W

$\frac{S33}{S4}$ $\frac{S34}{S3}$

T13N R9W

1967

Set steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.

Land, nearly level desert.
Soil, clay.
Timber, none.
Undergrowth, sagebrush and shadscale.

S. 89° 49' W., bet. secs. 4 and 33.

Over level desert land through sagebrush and shadscale undergrowth.

40.75 Point for the $\frac{1}{2}$ sec. cor. of secs. 4 and 33 at propor-

Dependent Resurvey of the North Boundary,
T. 13 N., R. 9 W.

CHAINS

tionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T14N R9W

$\frac{1}{2}$ $\frac{S33}{S4}$

T13N R9W

1967

Set steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.

Continue over level desert land.

73.95 Wash, 20 lks. wide, 3 ft. deep, drains N. 35° W.

81.50 The cor. of secs. 4, 5, 32 and 33, monumented with a charred pine post, 2x2 ins. 18 ins. long, in small mound of stone.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T14N R9W

$\frac{S32}{S5}$ | $\frac{S33}{S4}$

T13N R9W

1967

Bury original pine post cor. alongside iron post.

Land, level desert.

Soil, clay.

Timber, none.

Undergrowth, shadscale and sagebrush.

N. $89^\circ 59'$ W., bet. secs. 5 and 32.

Over level desert land through shadscale and sagebrush undergrowth.

16.30 Wash, 10 lks. wide, 3 ft. deep, drains N. 55° W.

17.02 Trail road, bears N. 52° W. and S. 52° E.

24.52 Trail road, bears N. 21° W. and S. 21° E.

39.96 Point for the $\frac{1}{2}$ sec. cor. of secs. 5 and 32 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

Dependent Resurvey of the North Boundary,
T. 13 N. R. 9 W.

CHAINS

T14N R9W

$\frac{1}{2}$ $\frac{S32}{S5}$

T13N R9W

1967

Set steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.

Continue over level desert land.

79.92 Point for the cor. of secs. 5, 6, 31 and 32 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T14N R9W

$\frac{S31}{S6}$ | $\frac{S32}{S5}$

T13N R9W

1967

Set steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.

Land, level desert.

Soil, clay.

Timber, none.

Undergrowth, shadscale and sagebrush.

N. 89° 59' W., bet. secs. 6 and 31.

Over level desert land through shadscale and sagebrush undergrowth.

0.55 Trail road, bears N. 3° E. and S. 3° W.

39.96 The ½ sec. cor. of secs. 6 and 31, monumented with a pine post, 3x3 ins., 4 ft. long, dimly scribed ½S on one side.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T14N R9W

$\frac{1}{2}$ $\frac{S31}{S6}$

T13N R9W

1967

Bury original pine post cor. alongside iron post.

S. 88° 35' W., beginning new measurement.

Continue over level desert land.

6.73 Trail road, bears N. 5° E. and S. 5° W.

Dependent Resurvey of the North Boundary,
T. 13 N., R. 9 W.

CHAINS		
14.63	Trail road, bears N. 76° E. and S. 76° W.	
34.63	Trail road, bears N. 22° W. and S. 22° E.	
36.98	Trail road, bears N. 79° W. and S. 79° E.	
42.87	<p>The cor. of Tps. 13 and 14 N., Rs. 9 and 10 W., monumented with an iron post, 2½ ins. diam., with brass cap mkd.</p> <p style="text-align: center;">T14N R10W R9W <u>S36 S31</u> S1 S6</p> <p style="text-align: center;">T13N R10W R9W 1967</p> <p>Land, level desert. Soil, clay. Timber, none. Undergrowth, sagebrush and shadscale.</p>	
	<p>Dependent Resurvey of the Subdivision, T. 13 N., R. 9 W.</p>	
	<p style="text-align: center;">Reestablishment of the Survey Executed by G. V. M. Boutelle in 1873.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>From the standard cor. of secs. 35 and 36 on the S. bdy. of the Tp.</p> <p>N. 1° 34' E., bet. secs. 35 and 36.</p> <p>Over rolling land through reseeded area; desc. 25 ft. over gently rolling NE. slope.</p> <p>9.40 Leave reseeded area, bears E. and W.; enter cultivated land.</p> <p>24.00 Bottom of descent, bears NE. and SW.; asc. 20 ft. over gently rolling SE. slope.</p> <p>32.00 Top of ascent, bears NE. and SW.; desc. 2 ft. over gentle NW. slope.</p> <p>40.08 Point for the ½ sec. cor. of secs. 35 and 36 at proportionate dist., falls on private cultivated land and is not monumented. There is no remaining evidence of the original cor.</p> <p>Desc. 35 ft. over gently rolling NW. slope through cultivated dry farm land.</p>	

Dependent Resurvey of the Subdivision,
T. 13 N. R. 9 W.

CHAINS	
56.00	Bottom of descent, bears NE. and SW.; thence over nearly level land.
80.16	Point for the cor. of secs. 25, 26, 35 and 36 at proportionate dist.; falls on private land and is not monumented. There is no remaining evidence of the original cor.
	Land, nearly level and gently rolling farm land. Soil, clay. Timber, none. Undergrowth, grain.
	From the cor. of secs. 25, 30, 31 and 36, on the E. bdy. of the Tp., hereinbefore described.
	S. 88° 55' W., bet. secs. 25 and 36.
	Over cultivated land. By triangulation.
40.43	Point for the $\frac{1}{4}$ sec. cor. of secs. 25 and 36 at proportionate dist., falls on private cultivated land and is not monumented. There is no remaining evidence of the original cor.
	Continue over cultivated land.
80.86	Point for the cor. of secs. 25, 26, 35 and 36.
	Land, level cultivated Soil, loam. Timber, none. Undergrowth, grain.
	N. 0° 54' W., bet. secs. 25 and 26.
	Over cultivated land.
40.06	Point for the $\frac{1}{4}$ sec. cor. of secs. 25 and 26 at proportionate dist., falls on private land and is not monumented. There is no remaining evidence of the original cor.
	Continue over cultivated land.
75.10	Leave cultivated land, bears irregularly NE. and SW. Enter sagebrush; asc. 25 ft. over S. slope.
80.12	Point for the cor. of secs. 23, 24, 25 and 26 at proportionate dist., falls on private land and is not monumented. There is no remaining evidence of the original cor.
	Land, nearly level farm land S. portion; gently rolling N. portion. Soil, clay. Timber, none. Undergrowth, grain S. portion; sagebrush N. portion.

Dependent Resurvey of the Subdivision,
T. 13 N., R. 9 W.

CHAINS	
	<p>From the cor. of secs. 19, 24, 25 and 30, on the E. bdy. of the Tp., hereinbefore described.</p>
	<p>S. 88° 03' W., bet. secs. 24 and 25.</p>
	<p>Over reseeded and cultivated land.</p>
40.48	<p>Point for the $\frac{1}{2}$ sec. cor. of secs. 24 and 25 at proportionate dist., falls on private land and is not monumented. There is no remaining evidence of the original cor.</p>
	<p>Continue over cultivated land.</p>
80.96	<p>Point for the cor. of secs. 23, 24, 25 and 26.</p> <p>Land, nearly level and gently rolling farm land. Soil, clay. Timber, none. Undergrowth, sagebrush W. portion.</p>
	<p>N. 0° 49' W., bet. secs. 23 and 24.</p>
	<p>Over rolling land through sagebrush and shadscale undergrowth.</p>
4.85	<p>Spur, slopes E.</p>
8.20	<p>Trail road, bears E. and W.; enter reseeded area.</p>
26.55	<p>Improved gravel road, Snowville to Locomotive Springs, bears N. 30° E. and S. 30° W.; enter sagebrush and shadscale.</p>
40.06	<p>Point for the $\frac{1}{2}$ sec. cor. of secs. 23 and 24 at proportionate dist., falls on private land and is not monumented. There is no remaining evidence of the original cor.</p> <p>Asc. 55 ft. over gently rolling SE. slope.</p>
80.12	<p>Point for the cor. of secs. 13, 14, 23 and 24 at proportionate dist., falls on private land and is not monumented. There is no remaining evidence of the original cor.</p> <p>Land, rolling. Soil, clay. Timber, none. Undergrowth, sagebrush and shadscale.</p>
	<p>From the cor. of secs. 13, 18, 19 and 24, on the E. bdy. of the Tp., hereinbefore described.</p>
	<p>S. 87° 32' W., bet. secs. 13 and 24.</p>

Dependent Resurvey of the Subdivision,
T. 13 N., R. 9 W.

CHAINS

- Over cultivated land.
- 2.00 Trail road, bears N. and S.
- 40.37 Point for the $\frac{1}{2}$ sec. cor. of secs. 13 and 24 at proportionate dist., falls on private land and is not monumented. There is no remaining evidence of the original cor.
- Continue over cultivated land.
- 43.15 Trail road, bears N. 10° E. and S. 10° W.
- 47.00 Gravel road, bears N. 31° E. to Snowville and S. 31° W. to Locomotive Springs.
- 60.90 Leave cultivated land, enter sagebrush.
- 80.74 Point for the cor. of secs. 13, 14, 23 and 24.
- Land, nearly level cultivated farm land E. portion; gently rolling desert W. portion.
Soil, clay.
Timber, none.
Undergrowth, sagebrush W. portion.
-
- N. $0^{\circ} 39'$ E., bet. secs. 13 and 14.
- Over rolling land through sagebrush undergrowth.
- 3.30 Low spur, slopes E.
- 8.50 Trail road, bears irregularly E. and W.
- 40.06 Point for the $\frac{1}{2}$ sec. cor. of secs. 13 and 14 at proportionate dist., falls on private land and is not monumented. There is no remaining evidence of the original cor.
- Continue over gently rolling land.
- 52.20 Low spur, slopes E.
- 80.12 The cor. of secs. 11, 12, 13 and 14, monumented with a pine post, 3x3 ins., 24 ins. long, lying on ground, and partially decayed. This corner is on private land and is not remonumented.
- Land, gently rolling desert.
Soil, clay.
Timber, none.
Undergrowth, shadscale and sagebrush.
-
- From the cor. of secs. 7, 12, 13 and 18, on the E. bdy. of the Tp., hereinbefore described.

2.

Dependent Resurvey of the Subdivision,
T. 13 N., R. 9 W.

CHAINS	
	<p>S. 86° 50' W., bet. secs. 12 and 13.</p> <p>Over cultivated land.</p>
39.19	<p>Point for the $\frac{1}{2}$ sec. cor. of secs. 12 and 13 at proportionate dist., falls on private cultivated land and is not monumented. There is no remaining evidence of the original cor.</p> <p>Continue over cultivated land by triangulation.</p>
78.38	<p>The cor. of secs. 11, 12, 13 and 14. End triangulation.</p> <p>Land, nearly level to gently rolling. Soil, clay. Timber, none. Undergrowth, grain, shadscale and sagebrush.</p>
	<p>N. 1° 42' W., bet. secs. 11 and 12.</p> <p>Over rolling land through shadscale and sagebrush; desc. 30 ft. over rolling NE. slope.</p>
41.71	<p>Point for the $\frac{1}{2}$ sec. cor. of secs. 11 and 12 at proportionate dist., falls on private land and is not monumented. There is no remaining evidence of the original cor.</p> <p>Desc. 35 ft. over gently rolling NE. slope.</p>
83.42	<p>Point for the cor. of secs. 1, 2, 11 and 12 at proportionate dist., falls on private land and is not monumented. There is no remaining evidence of the original cor.</p> <p>Land, gently rolling desert. Soil, clay. Timber, none. Undergrowth, sagebrush and shadscale.</p>
	<p>From the cor. of secs. 1, 6, 7 and 12, on the E. bdy. of the Tp., hereinbefore described.</p> <p>West, bet. secs. 1 and 12.</p> <p>Over gently rolling cultivated land by triangulation.</p>
40.76	<p>Point for the $\frac{1}{2}$ sec. cor. of secs. 1 and 12 at proportionate dist., falls on private land and is not monumented. There is no remaining evidence of the original cor.</p> <p>Continue over private land by triangulation.</p>

Dependent Resurvey of the Subdivision,
T. 13 N., R. 9 W.

CHAINS

81.52 Point for the cor. of secs. 1, 2, 11 and 12. End triangulation.

Land, gently rolling farm land.
Soil, clay.
Timber, none.
Undergrowth, grain and sagebrush and shadscale.

N. 0° 12' E., bet. secs. 1 and 2.

Over gently rolling land through shadscale and sagebrush undergrowth.

41.69 Point for the $\frac{1}{2}$ sec. cor. of secs. 1 and 2 at proportionate dist., falls on private land and is not monumented. There is no remaining evidence of the original cor.

Continue over gently rolling land.

43.02 Fence, bears N. 63° 30' E. and S. 63° 30' W.

83.60 The cor. of secs. 1, 2, 35 and 36, on the N. bdy. of the Tp., hereinbefore described.

Land, gently rolling.
Soil, clay.
Timber, none.
Undergrowth, sagebrush and shadscale.

Reestablishment of the Survey Executed by G. V. M. Boutelle in 1873 and the Resurvey Executed by E. W. Koeber in 1887.

From the standard cor. of secs. 34 and 35, on the S. bdy. of the Tp., hereinbefore described.

N. 1° 05' E., bet. secs. 34 and 35.

Over gently rolling land through sagebrush undergrowth; asc. 25 ft. over gentle S. slope.

11.20 Top of ascent; thence over nearly level land.

40.31 Point for the $\frac{1}{2}$ sec. cor. of secs. 34 and 35 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T13N R9W

$\frac{1}{2}$
S34|S35

1968

Dependent Resurvey of the Subdivision,
T. 13 N., R. 9 W.

CHAINS

Set steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.

Continue over nearly level land.

63.81 Gravel road, Snowville to Locomotive Springs, bears N. 40° E. and S. 40° W.

80.62 Point for the cor. of secs. 26, 27, 34 and 35 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T13N R9W

S27|S26
S34|S35

1968

Set steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.

Land, gently rolling.

Soil, clay.

Timber, none.

Undergrowth, sagebrush and shadscale.

Reestablishment of the Survey Executed
by G. V. M. Boutelle in 1873.

From the point for the cor. of secs. 25, 26, 35 and 36.

S. 89° 33' W., bet. secs. 26 and 35.

Over gently rolling cultivated land.

33.95 Leave cultivated land, bears N. and S.; enter sagebrush and shadscale.

40.67 Point for the ¼ sec. cor. of secs. 26 and 35 at proportionate dist., falls on private land and is not monumented. There is no remaining evidence of the original cor.

Continue over nearly level land.

71.60 Gravel road, Snowville to Locomotive Springs, bears N. 34° 04' E. and S. 34° 04' W.

73.60 Fence, bears N. 3° E. and S. 3° W.

81.34 The cor. of secs. 26, 27, 34 and 35.

Land, gently rolling to nearly level.

Soil, clay.

Timber, none.

Undergrowth, grain, sagebrush and shadscale.

Dependent Resurvey of the Subdivision,
T. 13 N., R. 9 W.

CHAINS

Reestablishment of the Survey Executed by G. V. M. Boutelle in 1873 and the Resurvey Executed by E. W. Koeber in 1887.

N. 0° 40' W., bet. secs. 26 and 27.

Over nearly level land through shadscale and sagebrush undergrowth.

16.40 Small stockwater pond (dry), bears East 2.40 chs. dist.

27.00 Dim trail road, bears N. 45° E. and S. 45° W.

40.30 Point for the $\frac{1}{2}$ sec. cor. of secs. 26 and 27 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 14 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T13N R9W

$\frac{1}{2}$
S27|S26

1968

Asc. 60 ft. over gently rolling SE. slope.

80.60 The cor. of secs. 22, 23, 26 and 27, monumented with a mound of stone. It is harmoniously related with existing original corners and is accepted as the best available evidence of the original corner point. No mks. were found on any of the stones in the mound.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 12 ins. in the ground, and in a mound of stone, $3\frac{1}{2}$ ft. base to top, with brass cap mkd.

T13N R9W

S22|S23
S27|S26

1968

Land, nearly level to gently rolling.
Soil, clay.
Timber, none.
Undergrowth, shadscale and sagebrush.

Reestablishment of the Survey Executed
by G. V. M. Boutelle in 1873.

Dependent Resurvey of the Subdivision,
T. 13 N., R. 9 W.

CHAINS

From the point for the cor. of secs. 23, 24, 25 and 26.

S. 89° 53' W., bet. secs. 23 and 26.

Over gently rolling land through shadscale and sagebrush undergrowth; asc. 20 ft. over gentle SE. slope.

17.75 Gravel road, Snowville to Locomotive Springs, bears N. 32° E. and S. 32° W.

40.49 Point for the 1/4 sec. cor. of secs. 23 and 26 at proportionate dist., falls on private land and is not monumented. There is no remaining evidence of the original cor.

Asc. 40 ft. over gentle SE. slope.

73.15 Fence, bears N. 3° W. and S. 3° E.

80.98 The cor. of secs. 22, 23, 26 and 27.

Land, gently rolling.
Soil, clay.
Timber, none.
Undergrowth, shadscale and sagebrush.

Reestablishment of the Survey Executed by
G. V. M. Boutelle in 1873 and the Resurvey
Executed by E. W. Koeber in 1887.

N. 0° 10' W., bet. secs. 22 and 23.

Over gently rolling land through shadscale and sagebrush undergrowth; asc. 70 ft. over gentle SE. slope.

40.18 Point for the 1/4 sec. cor. of secs. 22 and 23 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.

T13N R9W

1/4
S22 | S23

1968

Set steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.

Asc. 60 ft. over gentle SE. slope.

61.00 Enter dense juniper timber, bears NE. and SW.

78.90 Trail road, bears irregularly E. and W.

Dependent Resurvey of the Subdivision,
T. 13 N., R. 9 W.

CHAINS

80.36 The cor. of secs. 14, 15, 22 and 23, monumented with a badly decayed pine post.

From which the original bearing tree:

A juniper, 12 ins. diam., bears N. 5° E., 38 lks. dist. (record), mkd. S14 T13N R9W BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T13N R9W

S15	S14
S22	S23

1968

Set steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.

Bury decayed pine post alongside iron post.

Land, gently rolling.

Soil, sandy loam.

Timber, dense juniper, N. portion.

Undergrowth, shadscale and sagebrush.

Reestablishment of the Survey Executed
by G. V. M. Boutelle in 1873.

From the point for the cor. of secs. 13, 14, 23 and 24.

N. 89° 59' W., bet. secs. 14 and 23.

Over rolling land through shadscale and sagebrush undergrowth.

40.03 Point for the ½ sec. cor. of secs. 14 and 23 at proportionate dist., falls on private land and is not monumented. There is no remaining evidence of the original cor.

Continue over gently rolling land.

41.80 Trail road, bears N. 12° W. and S. 12° E.

54.70 Enter dense timber, bears NE. and SW.

71.17 Fence, bears N. and S.

80.06 The cor. of secs. 14, 15, 22 and 23.

Land, gently rolling.

Soil, sandy loam.

Timber, dense juniper W. portion.

Undergrowth, shadscale and sagebrush.

Dependent Resurvey of the Subdivision,
T. 13 N., R. 9 W.

CHAINS

Reestablishment of the Survey Executed by G. V. M. Boutelle in 1873 and the Resurvey Executed by E. W. Koeber in 1887.

N. 0° 42' W., bet. secs. 14 and 15.

Over gently rolling land through dense timber.

6.15 Leave timber, bears NE. and SW., enter sagebrush.

41.05 Point for the $\frac{1}{2}$ sec. cor. of secs. 14 and 15 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T13N R9W

$\frac{1}{2}$
S15|S14

1968

Set steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.

Bury a sandstone, 12x10x6 ins., mkd. with a cross (X) 4 ins. long, $\frac{1}{2}$ in. deep, alongside the iron post.

Asc. 20 ft. over gentle SW. slope.

51.60 Low spur, slopes N. 40° E.; desc. 55 ft. over gentle NE. slope.

82.10 Point for the cor. of secs. 10, 11, 14 and 15 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.

T13N R9W

S10|S11
S15|S14

1968

Land, gently rolling.

Soil, clay.

Timber, dense juniper S. portion.

Undergrowth, shadscale and sagebrush.

Reestablishment of the Survey Executed by G. V. M. Boutelle in 1873.

From the cor. of secs. 11, 12, 13 and 14.

Dependent Resurvey of the Subdivision,
T. 13 N., R. 9 W.

CHAINS

N. 88° 37' W., bet. secs. 11 and 14.

Over gently rolling land through sagebrush undergrowth.

36.55 Trail road, bears N. 45° W. and S. 45° E.

40.96 Point for the 1/4 sec. cor. of secs. 11 and 14 at proportionate dist., falls on private land and is not monumented. There is no remaining evidence of the original cor.

Continue over gently rolling land.

79.38 Fence, bears N. and S.

79.50 Trail road, bears N. and S. along fence line.

81.92 The cor. of secs. 10, 11, 14 and 15.

Land, gently rolling.

Soil, clay.

Timber, none.

Undergrowth, sagebrush.

Reestablishment of the Survey Executed by
G. V. M. Boutelle in 1873 and the Resurvey
Executed by E. W. Koeber in 1887.

N. 1° 20' W., bet. secs. 10 and 11.

Over gently rolling land through sagebrush undergrowth;
desc. 75 ft. over gentle NE. slope.

4.34 Fence, bears N. 24° W. and S. 24° E.

41.06 Point for the 1/4 sec. cor. of secs. 10 and 11 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.

T13N R9W
1/4
S10 | S11
1968

Set steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.

Desc. 40 ft. over gentle NE. slope.

82.12 Point for the cor. of secs. 2, 3, 10 and 11 at proportionate dist.; there is no remaining evidence of the original cor.

Dependent Resurvey of the Subdivision,
T. 13 N., R. 9 W.,

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd,

T13N R9W

$\frac{S3|S2}{S10|S11}$

1968

Set steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.

Land, gently rolling.
Soil, clay.
Timber, none.
Undergrowth, sagebrush.

Reestablishment of the Survey Executed
by G. V. M. Boutelle in 1873.

From the point for the cor. of secs. 1, 2, 11 and 12.

N. $89^{\circ} 29'$ W., bet. secs. 2 and 11.

Over gently rolling land through shadscale and sagebrush undergrowth; asc. 30 ft. over gentle NE. slope.

- 19.55 Top of ascent, bears N. and S.; desc. 15 ft. over gentle W. slope.
- 40.63 Point for the $\frac{1}{2}$ sec. cor. of secs. 2 and 11 at proportionate dist., falls on private land and is not monumented. There is no remaining evidence of the original cor.
- Asc. 30 ft. over gentle E. slope.
- 47.20 Top of ascent, bears N. and S.; desc. 20 ft. over gentle W. slope.
- 51.30 Bottom of descent, bears N. and S.; asc. 15 ft. over gentle E. slope.
- 55.20 Trail road, bears N. and S.
- 57.05 Top of ascent, bears N. and S.; desc. 30 ft. over gentle W. slope.
- 77.32 Fence, bears N. and S.
- 81.26 The cor. of secs. 2, 3, 10 and 11.
- Land, gently rolling.
Soil, clay.
Timber, none.
Undergrowth, shadscale and sagebrush.

Dependent Resurvey of the Subdivision,
T. 13 N., R. 9 W.

CHAINS

Reestablishment of the Survey Executed by
G. V. M. Boutelle in 1873 and the Resurvey
Executed by E. W. Koeber in 1887.

N. 0° 04' W., bet. secs. 2 and 3.

Over gently rolling land through shadscale and sagebrush
undergrowth; desc. 40 ft. over gentle NE. slope.

41.05 Point for the $\frac{1}{2}$ sec. cor. of secs. 2 and 3 at propor-
tionate dist.; there is no remaining evidence of the
original cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T13N R9W

$\frac{1}{2}$
S3|S2

1968

Set steel fence post, 6 ft. long, 2 ft. in the
ground, alongside iron post.

Desc. 40 ft. over gentle N. slope.

82.74 The cor. of secs. 2, 3, 34 and 35, on the N. boundary
of the Tp., hereinbefore described.

Land, gently rolling.

Soil, clay.

Timber, none.

Undergrowth, shadscale and sagebrush.

From the standard cor. of secs. 33 and 34, on the S.
bdy. of the Tp., hereinbefore described.

N. 0° 22' E., bet. secs. 33 and 34.

Over gently rolling land through shadscale and sagebrush;
asc. 25 ft. over gentle SE. slope.

38.20 Trail road, bears N. 40° E. and S. 40° W.

40.32 The $\frac{1}{2}$ sec. cor. of secs. 33 and 34, monumented with a
sandstone, 14x9x6 ins., firmly set and plainly mkd. $\frac{1}{2}$
on W. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T13N R9W

$\frac{1}{2}$
S33|S34

1968

Bury original stone cor. alongside iron post.

Dependent Resurvey of the Subdivision,
T. 13 N., R. 9 W.

CHAINS

N. 0° 24' E., beginning new measurement.

Asc. 60 ft. over gentle SE. slope.

40.43

The cor. of secs. 27, 28, 33 and 34, monumented with a sandstone, 14x9x8 ins., firmly set and dimly mkd. 1 notch on S. and 3 on E. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.

T13N R9W

S28	S27
S33	S34

1968

Bury original stone cor. alongside iron post.

Land, gently rolling.

Soil, clay.

Timber, none.

Undergrowth, shadscale and sagebrush.

From the cor. of secs. 26, 27, 34 and 35.

N. 88° 39' W., bet. secs. 27 and 34.

Over gently rolling land through shadscale and sagebrush undergrowth; asc. 15 ft. over gentle SE. slope.

35.65

Trail road, bears N. 50° E. and S. 50° W.

40.84

Point for the ½ sec. cor. of secs. 27 and 34 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 15 ins. in the ground, and in a mound of stone, 3½ ft. base to top, with brass cap mkd.

T13N R9W

½	S27
	S34

1968

Asc. 30 ft. over gentle SE. slope.

81.68

The cor. of secs. 27, 28, 33 and 34.

Land, gently rolling.

Soil, clay.

Timber, none.

Undergrowth, shadscale and sagebrush.

Dependent Resurvey of the Subdivision,
T. 13 N., R. 9 W.

CHAINS

N. 0° 21' E., bet. secs. 27 and 28.

Over rolling land through shadscale and sagebrush undergrowth; asc. 120 ft. over SE. slope.

40.45. The $\frac{1}{4}$ sec. cor. of secs. 27 and 28, monumented with a trachyte stone, 13x13x6 ins., firmly set and plainly mkd. $\frac{1}{4}$ on W. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 8 ins. in the ground, and in a mound of stone, $3\frac{1}{2}$ ft. base to top, with brass cap mkd.

T13N R9W
 $\frac{1}{4}$
S28 | S27
1968

Bury original stone cor. alongside iron post.

N. 0° 18' E., beginning new measurement.

Asc. 175 ft. over gentle SE. slope.

40.42 The cor. of secs. 21, 22, 27 and 28, monumented with a trachyte, 14x10x6 ins., firmly set and plainly mkd. 2 notches on S. and 3 notches on E. edges.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 15 ins. in the ground, and in a mound of stone, $3\frac{1}{2}$ ft. base to top, with brass cap mkd.

T13N R9W
S21 | S22
S28 | S27
1968

Bury original stone cor. alongside iron post.

Land, gently rolling.

Soil, clay.

Timber, none.

Undergrowth, shadscale and sagebrush.

From the cor. of secs. 22, 23, 26 and 27.

N. 88° 30' W., bet. secs. 22 and 27.

Over gently rolling land through shadscale and sagebrush undergrowth; asc. 105 ft. over gentle SE. slope.

Dependent Resurvey of the Subdivision,
T. 13 N., R. 9 W.

CHAINS

40.16 Point for the $\frac{1}{4}$ sec. cor. of secs. 22 and 27, at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins. in the ground, and in a collar of stone, with brass cap mkd.

T13N R9W

$\frac{1}{4}$ $\frac{S22}{S27}$

1968

Asc. 130 ft. over gentle SE. slope.

80.32 The cor. of secs. 21, 22, 27 and 28.

Land, gently rolling.

Soil, clay.

Timber, none.

Undergrowth, shadscale and sagebrush.

Reestablishment of the Survey Executed
by E. W. Koeber in 1887.

N. $0^{\circ} 14'$ E., bet. secs. 21 and 22.

Over gently rolling land through shadscale and sagebrush undergrowth; asc. 150 ft. over general SE. slope.

40.35 The $\frac{1}{4}$ sec. cor. of secs. 21 and 22, monumented with a trachyte, 16x9x6 ins., firmly set and plainly mkd. $\frac{1}{4}$ on W. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.

T13N R9W

$\frac{1}{4}$ S21 | S22

1968

Bury original stone cor. alongside iron post.

N. $2^{\circ} 08'$ E., beginning new measurement.

Asc. 135 ft. over SE. slope.

Dependent Resurvey of the Subdivision,
T. 13 N., R. 9 W.

CHAINS

26.80 Ridge, bears N. 45° E. and S. 45° W.; desc. 40 ft. over N. slope.

40.05 The cor. of secs. 15, 16, 21 and 22, monumented with a trachyte, 14x10x8 ins., firmly set and plainly mkd. 3 notches on E. and S. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 14 ins. in the ground, and in a mound of stone, 3½ ft. base to top, with brass cap mkd.

T13N R9W

S16	S15
S21	S22

1968

Bury original stone cor. alongside iron post.

Set a steel fence post, 6 ft. long, 14 ins. in the ground, alongside iron post.

Land, gently rolling.

Soil, clay.

Timber, none.

Undergrowth, shadscale and sagebrush.

From the cor. of secs. 14, 15, 22 and 23.

N. 88° 28' W., bet. secs. 15 and 22.

Over gently rolling land through dense timber; asc. 140 ft. over E. slope.

39.20 Point for the ¼ sec. cor. of secs. 15 and 22 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground, and in a mound of stone, 3½ ft. base to top, with brass cap mkd.

T13N R9W

¼	S15
	S22

1968

Set steel fence post, 6 ft. long, 10 ins. in the ground, alongside iron post.

Asc. 260 ft. over W. slope.

70.30 Top of ascent, bears N. and S.; thence over nearly level land. Leave dense timber.

78.40 The cor. of secs. 15, 16, 21 and 22.

Dependent Resurvey of the Subdivision,
T. 13 N., R. 9 W.

CHAINS

Land, rolling.
Soil, clay.
Timber, dense juniper.
Undergrowth, sagebrush and shadscale.

N. 3° 02' W., bet. secs. 15 and 16.

Over rolling land through shadscale and sagebrush undergrowth; desc. 235 ft. over general N. slope.

40.62

Point for the $\frac{1}{2}$ sec. cor. of secs. 15 and 16 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 16 ins. in the ground, and in a mound of stone, $3\frac{1}{2}$ ft. base to top, with brass cap mkd.

T13N R9W

$\frac{1}{2}$
S16 | S15

1968

Set a steel fence post, 6 ft. long, 16 ins. in the ground, alongside iron post.

Desc. 245 ft. over N. slope.

81.82

Point for the cor. of secs. 9, 10, 15 and 16 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins. in the ground, and in a collar of stone, with brass cap mkd.

T13N R9W

S9 | S10
S16 | S15

1968

Set steel fence post, 6 ft. long, 18 ins. in the ground, alongside iron post.

Land, rolling.
Soil, clay.
Timber, none.
Undergrowth, shadscale and sagebrush.

Reestablishment of the Survey Executed by
G. V. M. Boutelle in 1873 and the Resurvey
Executed by E. W. Koeber in 1887.

Dependent Resurvey of the Subdivision,
T. 13 N., R. 9 W.

CHAINS

From the cor. of secs. 10, 11, 14 and 15.

N. 88° 43' W., bet. secs. 10 and 15.

Over gently rolling land through sagebrush and shadscale undergrowth; desc. 55 ft. along gently rolling N. slope.

31.50 Trail road, bears N. and S.

40.87 Point for the $\frac{1}{4}$ sec. cor. of secs. 10 and 15 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 16 ins. in the ground, and in a mound of stone, $3\frac{1}{2}$ ft. base to top, with brass cap mkd.

T13N R9W

$\frac{1}{4}$ — $\frac{S10}{S15}$

1968

Set steel fence post, 6 ft. long, 16 ins. in the ground, alongside iron post.

Continue along gently rolling N. slope.

81.74 The cor. of secs. 9, 10, 15 and 16.

Land, gently rolling.

Soil, clay.

Timber, none.

Undergrowth, sagebrush and shadscale.

N. 1° 01' W., bet. secs. 9 and 10.

Over gently rolling land through shadscale and sagebrush undergrowth; desc. 105 ft. over gentle N. slope.

40.57 Point for the $\frac{1}{4}$ sec. cor. of secs. 9 and 10 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 12 ins. in the ground, and in a mound of stone, $3\frac{1}{2}$ ft. base to top, with brass cap mkd.

T13N R9W

$\frac{1}{4}$
S9|S10

1968

Set steel fence post, 6 ft. long, 1 ft. in the ground, alongside iron post.

Desc. 40 ft. over gentle N. slope.

Dependent Resurvey of the Subdivision,
T. 13 N., R. 9 W.

CHAINS

81.14

Point for the cor. of secs. 3, 4, 9 and 10 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T13N R9W

S4|S3
S9|S10

1968

Set steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.

Land, gently rolling.
Soil, clay.
Timber, none.
Undergrowth, shadscale and sagebrush.

From the cor. of secs. 2, 3, 10 and 11.

N. 89° 22' W., bet. secs. 3 and 10.

Over gently rolling land through sagebrush and shadscale undergrowth; asc. 10 ft. over gentle E. slope.

9.80

Top of ascent, bears N. and S.; desc. 45 ft. over gentle NW. slope.

40.63

Point for the ¼ sec. cor. of secs. 3 and 10 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T13N R9W

¼ S3
S10

1968

Set steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.

Desc. 10 ft. over gentle NW. slope.

55.05

Trail road, bears N. and S., stockwater pond (dry), bears north 2.50 chs. dist.

81.26

The cor. of secs. 3, 4, 9 and 10.

Land, gently rolling.
Soil, clay.
Timber, none.
Undergrowth, shadscale and sagebrush.

N. 0° 15' W., bet. secs. 3 and 4.

Over gently rolling land through shadscale and sagebrush

Dependent Resurvey of the Subdivision,
T. 13 N., R. 9 W.

CHAINS

undergrowth; desc. 25 ft. over gentle NW. slope.

18.80 Trail road, bears N. 50° W. and S. 50° E.

40.56 Point for the $\frac{1}{4}$ sec. cor. of secs. 3 and 4 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T13N R9W

$\frac{1}{4}$
S4|S3

1968

Set steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.

Continue over nearly level land.

81.54 The cor. of secs. 3, 4, 33 and 34, on the N. bdy. of the Tp., hereinbefore described.

Land, gently rolling to nearly level.

Soil, clay.

Timber, none.

Undergrowth, shadscale and sagebrush.

From the standard cor. of secs. 32 and 33, on the S. bdy. of the Tp., hereinbefore described.

N. 0° 56' E., bet. secs. 32 and 33.

Over gently rolling land through shadscale and sagebrush undergrowth; asc. 25 ft. over gentle SW. slope.

27.95 Trail road, bears N. 43° E. and S. 43° W.

40.53 Point for the $\frac{1}{4}$ sec. cor. of secs. 32 and 33 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T13N R9W

$\frac{1}{4}$
S32|S33

1968

Set steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.

Asc. 45 ft. over gentle SW. slope.

41.70 Trail road, bears E. and W.

81.06 The cor. of secs. 28, 29, 32 and 33, monumented with a

CHAINS

mound of stone. This point is harmoniously related with existing original cors. and is accepted as the best available evidence of the position of the original cor. No marks were found on any of the stones in the mound.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins. in the ground, and in a collar of stone, with brass cap mkd.

T13N R9W

S29	S28
S32	S33

1968

Land, gently rolling.
Soil, clay.
Timber, none.
Undergrowth, shadscale and sagebrush.

From the cor. of secs. 27, 28, 33 and 34.

N. $89^{\circ} 54'$ W., bet. secs. 28 and 33.

Over gently rolling land through sagebrush and shadscale undergrowth; asc. 30 ft. over gentle SE. slope.

28.00 Top of ascent, bears N. and S.; desc. 15 ft. over gentle SW. slope.

40.11 Point for the $\frac{1}{4}$ sec. cor. of secs. 28 and 33 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins. in the ground, and in a mound of stone, $3\frac{1}{2}$ ft. base to top, with brass cap mkd.

T13N R9W

$\frac{1}{4}$	S28
	S33

1968

Set steel fence post, 6 ft. long, 10 ins. in the ground, alongside iron post.

Desc. 45 ft. over gentle SW. slope.

80.22 The cor. of secs. 28, 29, 32 and 33.

Land, gently rolling.
Soil, clay.
Timber, none.
Undergrowth, sagebrush and shadscale.

N. $0^{\circ} 07'$ E., bet. secs. 28 and 29.

Dependent Resurvey of the Subdivision,
T. 13 N., R. 9 W.

CHAINS

Over gently rolling land through shadscale and sagebrush undergrowth; asc. 75 ft. over gentle SW. slope.

40.18 The $\frac{1}{2}$ sec. cor. of secs. 28 and 29, monumented with a mound of stone, is accepted as the best available evidence of the position of the original cor. No marks were found on any of the stones in the mound.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 12 ins. in the ground, and in a mound of stone, $3\frac{1}{2}$ ft. base to top, with brass cap mkd.

T13N R9W

$\frac{1}{2}$
S29|S28

1968

N. $1^{\circ} 06'$ W., beginning new measurement.

Asc. 80 ft. over gentle SW. slope.

38.75 Spur, slopes W.; desc. gentle NW. slope.

40.94 Point for the cor. of secs. 20, 21, 28 and 29 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T13N R9W

S20|S21
S29|S28

1968

Set steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.

Land, gently rolling.

Soil, clay.

Timber, none.

Undergrowth, shadscale and sagebrush.

From the cor. of secs. 21, 22, 27 and 28.

N. $89^{\circ} 42'$ W., bet. secs. 21 and 28.

Over gently rolling land through shadscale and sagebrush undergrowth; asc. 70 ft. over gentle SE. slope.

29.40 Spur, slopes S.; desc. 20 ft. over gentle SW. slope.

Dependent Resurvey of the Subdivision,
T. 13 N., R. 9 W.

CHAINS

40.68

Point for the $\frac{1}{4}$ sec. cor. of secs. 21 and 28 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 15 ins. in the ground, and in a mound of stone, $3\frac{1}{2}$ ft. base to top, with brass cap mkd.

T13N R9W

$$\frac{1}{4} \frac{S21}{S28}$$

1968

Desc. 200 ft. over gently rolling SW. slope.

81.36

The cor. of secs. 20, 21, 28 and 29.

Land, rolling.

Soil, clay.

Timber, none.

Undergrowth, shadscale and sagebrush.

N. $1^{\circ} 43'$ E., bet. secs. 20 and 21.

Over gently rolling land through sagebrush and shadscale undergrowth.

40.95

The $\frac{1}{4}$ sec. cor. of secs. 20 and 21, monumented with a trachyte, $18 \times 10 \times 3$ ins., firmly set and plainly mkd. $\frac{1}{4}$ on W. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.

T13N R9W

$$\frac{1}{4} S20 | S21$$

1968

Bury original stone cor. alongside iron post.

N. $1^{\circ} 27'$ E., beginning new measurement.

Desc. 20 ft. over gentle NW. slope.

40.78

The cor. of secs. 16, 17, 20 and 21, monumented with a trachyte, $18 \times 16 \times 10$ ins., firmly set and plainly mkd. 3 notches on S. and 4 notches on E. edges.

At the cor. point

Dependent Resurvey of the Subdivision,
T. 13 N., R. 9 W.

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 14 ins. in the ground, and in a mound of stone, 3½ ft. base to top, with brass cap mkd.

T13N R9W

$\frac{S17}{S20} | \frac{S16}{S21}$

1968

Bury original stone cor. alongside iron post.

Land, gently rolling.
Soil, clay.
Timber, none.
Undergrowth, shadscale and sagebrush.

From the cor. of secs. 15, 16, 21 and 22.

N. 88° 45' W., bet. secs. 16 and 21.

Over rolling land through shadscale and sagebrush undergrowth.

10.20 Rim of bench, bears NE. and SW.; desc. 195 ft. over NW. slope.

40.45 The ½ sec. cor. of secs. 16 and 21, monumented with a trachyte stone, 14x10x8 ins., firmly set and plainly mkd ½ on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground, and in a mound of stone, 3½ ft. base to top, with brass cap mkd.

T13N R9W

$\frac{1}{2} \frac{S16}{S21}$

1968

Bury original stone cor. alongside iron post.

N. 88° 43' W., beginning new measurement.

Desc. 195 ft. over NW. slope.

40.36 The cor. of secs. 16, 17, 20 and 21.

Land, rolling.
Soil, clay.
Timber, none.
Undergrowth, shadscale and sagebrush.

Dependent Resurvey of the Subdivision,
T. 13 N., R. 9 W.

CHAINS

Reestablishment of the Survey Executed by G. V. M. Boutelle in 1873 and the Resurvey Executed by E. W. Koeber in 1887.

N. 3° 39' W., bet. secs. 16 and 17.

Over gently rolling land through shadscale and sagebrush undergrowth; desc. 100 ft. over gentle NW. slope.

40.42

Point for the 1/2 sec. cor. of secs. 16 and 17 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 18 ins. in the ground, with brass cap mkd.

T13N R9W

1/2
S17 | S16

1968

Set steel fence post, 6 ft. long, 1 1/2 ft. in the ground, alongside iron post.

Desc. 100 ft. over gentle NW. slope.

80.84

Point for the cor. of secs. 8, 9, 16 and 17 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 18 ins. in the ground, and in a collar of stone, with brass cap mkd.

T13N R9W

S8 | S9
S17 | S16

1968

Set steel fence post, 6 ft. long, 1 1/2 ft. in the ground, alongside iron post.

Land, gently rolling.

Soil, clay.

Timber, none.

Undergrowth, shadscale and sagebrush.

From the cor. of secs. 9, 10, 15 and 16.

N. 89° 31' W., bet. secs. 9 and 16.

Over gently rolling land through shadscale and sagebrush undergrowth; desc. 40 ft. over gentle NW. slope.

40.76

Point for the 1/2 sec. cor. of secs. 9 and 16 at proportionate dist.; there is no remaining evidence of the original cor.

Dependent Resurvey of the Subdivision,
T. 13 N., R. 9 W.

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 16 ins. in the ground, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T13N R9W

$\frac{1}{4}$ S9
S16

1968

Set steel fence post, 6 ft. long, 16 ins. in the ground, alongside iron post.

Desc. 125 ft. over gentle NW. slope.

81.52 The cor. of secs. 8, 9, 16 and 17.

Land, gently rolling.

Soil, clay.

Timber, none.

Undergrowth, shadscale and sagebrush.

N. 0° 33' W., bet. secs. 8 and 9.

Over gently rolling land through shadscale and sagebrush undergrowth; desc. 60 ft. over gentle NW. slope.

40.34 Point for the $\frac{1}{4}$ sec. cor. of secs. 8 and 9 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T13N R9W

$\frac{1}{4}$
S8|S9

1968

Set steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.

Desc. 40 ft. over gentle NW. slope.

56.55 Wash, 10 lks. wide, 3 ft. deep, drains N. 45° W.

80.68 Point for the cor. of secs. 4, 5, 8 and 9 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T13N R9W

S5|S4
S8|S9

1968

4

Dependent Resurvey of the Subdivision,
T. 13 N., R. 9 W.

CHAINS

Set steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.

Land, gently rolling.

Soil, clay.

Timber, none.

Undergrowth, sagebrush and shadscale.

From the cor. of secs. 3, 4, 9 and 10.

N. 89° 49' W., bet. secs. 4 and 9.

Over gently rolling land through shadscale and sagebrush undergrowth; desc. 45 ft. over gentle NW. slope.

38.30 Wash, 10 lks. wide, 2 ft. deep, drains N. 40° W.

40.40 Point for the $\frac{1}{2}$ sec. cor. of secs. 4 and 9, at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T13N R9W

$\frac{1}{2} \frac{S4}{S9}$

1968

Set steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.

Desc. 35 ft. over gentle NW. slope.

56.05 Wash, 20 lks. wide, 2 ft. deep, drains N. 40° W.

80.80 The cor. of secs. 4, 5, 8 and 9.

Land, gently rolling.

Soil, clay.

Timber, none.

Undergrowth, shadscale and sagebrush.

Reestablishment of the Survey Executed
by G. V. M. Boutelle in 1873.

N. 0° 46' W., bet. secs. 4 and 5.

Over gently rolling land through shadscale and sagebrush undergrowth; desc. 15 ft. over gentle NW. slope.

Dependent Resurvey of the Subdivision,
T. 13 N., R. 9 W.

CHAINS

- 40.34 Point for the $\frac{1}{4}$ sec. cor. of secs. 4 and 5 at proportionate dist.; there is no remaining evidence of the original cor..
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.
- T13N R9W
 $\frac{1}{4}$
S5|S4
1968
- Set steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.
- Desc. 5 ft. over nearly level land.
- 81.08 The cor. of secs. 4, 5, 32 and 33, on the N. bdy. of the Tp., hereinbefore described.
- Land, gently rolling.
Soil, clay.
Timber, none.
Undergrowth, shadscale and sagebrush.
- From the standard cor. of secs. 31 and 32, on the S. bdy. of the Tp., hereinbefore described.
- N. $0^{\circ} 03'$ E., bet. secs. 31 and 32.
- Over gently rolling grass land; asc. 20 ft. over gentle SW. slope.
- 40.18 Point for the $\frac{1}{4}$ sec. cor. of secs. 31 and 32 at proportionate dist.; there is no remaining evidence of the original cor.
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.
- T13N R9W
 $\frac{1}{4}$
S31|S32
1968
- Set steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.
- Asc. 10 ft. over gentle SW. slope.
- 76.25 Fence, bears E. and W. Leave grass land, enter sagebrush and shadscale.
- 80.36 Point for the cor. of secs. 29, 30, 31 and 32 at proportionate dist.; there is no remaining evidence of the original cor.

Dependent Resurvey of the Subdivision,
T. 13 N., R. 9 W.

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T13N R9W

S30	S29
S31	S32

1968

Set steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.

Land, gently rolling.

Soil, clay.

Timber, none.

Undergrowth, grass, sagebrush and shadscale.

From the cor. of secs. 28, 29, 32 and 33.

S. $89^{\circ} 36'$ W., bet. secs. 29 and 32.

Over gently rolling land through shadscale and sagebrush undergrowth; desc. 20 ft. over gentle SW. slope.

40.84

Point for the $\frac{1}{4}$ sec. cor. of secs. 29 and 32 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins. in the ground, and in a collar of stone, with brass cap mkd.

T13N R9W

$\frac{1}{4}$	S29
	S32

1968

Set steel fence post, 6 ft. long, $1\frac{1}{2}$ ft. in the ground, alongside iron post.

Desc. 25 ft. over gentle SW. slope.

81.68

The cor. of secs. 29, 30, 31 and 32.

Land, gently rolling.

Soil, clay.

Timber, none.

Undergrowth, shadscale and sagebrush.

N. $89^{\circ} 08'$ W., bet. secs. 30 and 31.

Over nearly level land through shadscale and sagebrush undergrowth.

Dependent Resurvey of the Subdivision,
T. 13 N., R. 9 W.

CHAINS

40.96 Point for the $\frac{1}{4}$ sec. cor. of secs. 30 and 31 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd,

T13N R9W

$\frac{1}{4}$ $\frac{S30}{S31}$

1968

Set steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.

Desc. 55 ft. over gentle W. slope.

70.14 Fence, bears N. and S.; enter reseeded area.

82.40 The cor. of secs. 25, 30, 31 and 36, on the W. bdy. of the Tp., monumented with an iron post, $2\frac{1}{2}$ ins. diam., set, mkd. and witnessed as described in the field notes of T. 13 N., R. 10 W., surveyed concurrently under this same group.

Land, nearly level and gently rolling.

Soil, clay.

Timber, none.

Undergrowth, shadscale, sagebrush and grass.

From the cor. of secs. 29, 30, 31 and 32.

N. $0^{\circ} 04'$ E., bet. secs. 29 and 30.

Over gently rolling land through shadscale and sagebrush undergrowth; asc. 20 ft. over gentle SW. slope.

40.18 Point for the $\frac{1}{4}$ sec. cor. of secs. 29 and 30 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T13N R9W

$\frac{1}{4}$

S30|S29

1968

Set steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.

Dependent Resurvey of the Subdivision,
T. 13 N., R. 9 W.

CHAINS

Set steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.

Asc. 15 ft. over gentle SW. slope.

80.36

The cor. of secs. 19, 20, 29 and 30, monumented with a pine post, 2x2 ins., 27 ins. long, loosely set and dimly scribed S30 on SW. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T13N R9W

S19	S20
S30	S29

1968

Bury original cor. alongside iron post.

Land, gently rolling.

Soil, clay.

Timber, none.

Undergrowth, shadscale and sagebrush.

From the cor. of secs. 20, 21, 28 and 29.

S. 89° 04' W., bet. secs. 20 and 29.

Over gently rolling land through shadscale and sagebrush undergrowth; desc. 120 ft. over gentle W. slope.

40.44

Point for the ½ sec. cor. of secs. 20 and 29 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T13N R9W

½	S20
	S29

1968

Set steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.

Desc. 55 ft. over gentle W. slope.

80.88

The cor. of secs. 19, 20, 29 and 30.

Land, gently rolling.

Soil, clay.

Timber, none.

Undergrowth, shadscale and sagebrush.

Dependent Resurvey of the Subdivision,
T. 13 N., R. 9 W.

CHAINS

N. 88° 52' W., bet. secs. 19 and 30.

Over gently rolling land through shadscale and sagebrush undergrowth; desc. 45 ft. over gentle W. slope.

41.34 Point for the $\frac{1}{4}$ sec. cor. of secs. 19 and 30 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T13N R9W

$\frac{1}{4}$ $\frac{S19}{S30}$

1968

Set steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.

Desc. 55 ft. over gentle W. slope.

81.10 Trail road, bears N. and S.

83.34 The cor. of secs. 19, 24, 25 and 30, on the W. bdy. of the Tp., monumented with an iron post, $2\frac{1}{2}$ ins. diam., set, mkd. and witnessed as described in the field notes of T. 13 N., R. 10 W., surveyed concurrently under this same group.

Land, gently rolling.
Soil, clay.
Timber, none.
Undergrowth, shadscale and sagebrush.

From the cor. of secs. 19, 20, 29 and 30.

N. 0° 10' E., bet. secs. 19 and 20.

Over gently rolling land through shadscale and sagebrush undergrowth; asc. 15 ft. over gentle SW. slope.

18.50 Spur, slopes W.; desc. 20 ft. over gentle NW. slope.

40.24 The $\frac{1}{4}$ sec. cor. of secs. 19 and 20, monumented with a trachyte stone, 16x15x4 ins., firmly set and plainly mkd. $\frac{1}{4}$ on W. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.

Dependent Resurvey of the Subdivision,
T. 13 N., R. 9 W.

CHAINS

T13N R9W

$\frac{1}{2}$
S19 | S20

1968

Bury original stone cor. alongside iron post.

N. 0° 31' W., beginning new measurement.

Desc. 50 ft. over gentle NW. slope.

40.14 Point for the cor. of secs. 17, 18, 19 and 20 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T13N R9W

S18 | S17
S19 | S20

1968

Set steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.

Land, gently rolling.

Soil, clay.

Timber, none.

Undergrowth, shadscale and sagebrush.

From the cor. of secs. 16, 17, 20 and 21.

S. 88° 09' W., bet. secs. 17 and 20.

Over gently rolling land through shadscale and sagebrush undergrowth; desc. 130 ft. over gently rolling NW. slope.

41.68 Point for the ½ sec. cor. of secs. 17 and 20 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 16 ins. in the ground, with brass cap mkd.

T13N R9W

$\frac{1}{2}$ — S17
S20

1968

Set steel fence post, 6 ft. long, 16 ins. in the ground, alongside iron post.

Desc. 105 ft. over gentle NW. slope.

Dependent Resurvey of the Subdivision,
T. 13 N., R. 9 W.

11.15 The cor. of secs. 17, 18, 19 and 20.

Land, gently rolling.
Soil, clay.
Timber, none.
Undergrowth, shadscale and sagebrush.

N. 33° 38' W., bet. secs. 18 and 19

Over gently rolling land through shadscale and sagebrush undergrowth; desc. 45 ft. over gentle NW. slope.

11.16 Trail road, bears N. 27° E. and S. 27° W.

11.17 Point for the $\frac{1}{2}$ sec. cor. of secs. 18 and 19 at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T13N R9W

$\frac{1}{2}$ $\frac{S18}{S19}$

1968

Set steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.

Desc. 10 ft. over gentle NW. slope.

11.18 Trail road, bears N. and S.

11.19 The cor. of secs. 13, 14, 19 and 24, on the W. bdy. of the Twp., monumented with an iron post, 2 $\frac{1}{2}$ ins. dia., set, mkd. and witnessed as described in the field notes at T. 13 N., R. 10 W., surveyed concurrently under this same group.

Land, gently rolling.
Soil, clay.
Timber, none.
Undergrowth, shadscale and sagebrush.

From the cor. of secs. 17, 18, 19 and 20.

N. 0° 10' E., bet. secs. 17 and 18.

Over gently rolling land through shadscale and sagebrush undergrowth; desc. 55 ft. over gently rolling NW. slope.

Dependent Resurvey of the Subdivision,
T. 13 N., R. 9 W.

CHAINS	
4.15	Trail road, bears N. 40° E. and S. 40° W.
10.83	Fence, bears N. 45° E. and S. 45° W.
21.75	Wash, 10 lks. wide, 2 ft. deep, drains N. 80° W.
31.75	Leave sagebrush and shadscale, enter reseeded area, bears NE. and SW.
40.14	The $\frac{1}{2}$ sec. cor. of secs. 17 and 18, monumented with a pine post, 3x3 ins., 24 ins. long, scribed $\frac{1}{2}$ S on N. face.
	At the cor. point
	Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T13N R9W
	$\begin{array}{c} \frac{1}{2} \\ \hline S18 S17 \end{array}$
	1968
	Set steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.
	Bury original pine post cor. alongside iron post.
	N. 5° 02' W., beginning new measurement.
	Desc. 45 ft. over gentle NW. slope.
41.20	Point for the cor. of secs. 7, 8, 17 and 18 at proportionate dist.; there is no remaining evidence of the original cor.
	Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T13N R9W
	$\begin{array}{c} S7 S8 \\ \hline S18 S17 \end{array}$
	1968
	Set steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.
	Land, gently rolling.
	Soil, clay.
	Timber, none.
	Undergrowth, shadscale, sagebrush and grass.
	From the cor. of secs. 8, 9, 16 and 17.

Dependent Resurvey of the Subdivision,
T. 13 N., R. 9 W.

CHAINS

S. 88° 29' W., bet. secs. 8 and 17.

Over gently rolling land through shadscale and sagebrush undergrowth; desc. 85 ft. over gentle NW. slope.

15.47 Fence, bears N. 40° 30' E. and S. 40° 30' W.

18.00 Enter reseeded land.

36.20 Wash, 3 chains wide, 15 ft. deep, drains N. 45° W.

40.82 Point for the $\frac{1}{2}$ sec. cor. of secs. 8 and 17, at proportionate dist.; there is no remaining evidence of the original corner.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T13N R9W

$\frac{1}{2}$ $\frac{S8}{S17}$

1968

Set steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.

Desc. 75 ft. over gentle NW. slope.

81.64 The cor. of secs. 7, 8, 17 and 18.

Land, gently rolling.

Soil, clay.

Timber, none.

Undergrowth, shadscale and sagebrush.

N. 88° 54' W., bet. secs. 7 and 18.

Over nearly level reseeded land.

20.15 Enter sagebrush; leave reseeded land.

40.86 Point for the $\frac{1}{2}$ sec. cor. of secs. 7 and 18 at proportionate distance; there is no remaining evidence of the original corner.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T13N R9W

$\frac{1}{2}$ $\frac{S7}{S18}$

1968

Set steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.

42.15 Trail road, bears N. and S.

Dependent Resurvey of the Subdivision,
T. 13 N., R. 9 W.

CHAINS	
74.75	Trail road, bears N. and S.
81.38	<p>The cor. of secs. 7, 12, 13 and 18, on the W. bdy. of the Tp., monumented with an iron post, 2½ ins. diam., set, mkd. and witnessed as described in the field notes of T. 13 N., R. 10 W., surveyed concurrently under this same group.</p> <p>Land, nearly level. Soil, clay. Timber, none. Undergrowth, sagebrush and shadscale.</p>
41.04	<p>From the cor. of secs. 7, 8, 17 and 18.</p> <p>N. 0° 29' W., bet. secs. 7 and 8.</p> <p>Over gently rolling land through grassy reseeded area; desc. 20 ft. over gentle NW. slope.</p> <p>Point for the ¼ sec. cor. of secs. 7 and 8 at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground; with brass cap mkd.</p> <p style="text-align: center;">T13N R9W ¼ S7 S8 1968</p> <p>Set steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.</p> <p>Desc. 10 ft. over gentle NW. slope.</p>
82.08	<p>Point for the cor. of secs. 5, 6, 7 and 8 at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T13N R9W S6 S5 S7 S8 1968</p> <p>Set steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.</p> <p>Land, gently rolling. Soil, clay. Timber, none. Undergrowth, grass.</p>

Dependent Resurvey of the Subdivision,
T. 13 N., R. 9 W.

CHAINS

From the cor. of secs. 4, 5, 8 and 9.

S. 89° 28' W., bet. secs. 5 and 8.

Over gently rolling land through shadscale and sagebrush;
desc. 45 ft. over gentle NW. slope.

- 2.64 Fence, bears N. and S.; enter reseeded area.
- 23.45 Wash, 20 lks. wide, 3 ft. deep, drains N. 80° W.
- 32.25 Leave reseeded area, enter sagebrush and shadscale, bears
N. and S.
- 40.71 Point for the $\frac{1}{2}$ sec. cor. of secs. 5 and 8, at propor-
tionate distance; there is no remaining evidence of the
original corner.
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T13N R9W

$\frac{1}{2}$ — $\frac{S5}{S8}$

1968

Set steel fence post, 6 ft. long, 2 ft. in the
ground, alongside iron post.

- 74.85 Leave sagebrush and shadscale; enter reseeded area, bears
N. and S.
- 81.42 The cor. of secs. 5, 6, 7 and 8.
- Land, gently rolling.
Soil, clay.
Timber, none.
Undergrowth, shadscale, sagebrush and grass.

N. 89° 52' W., bet. secs. 6 and 7.

Over nearly level land through grassy reseeded area.

- 34.66 Leave reseeded area, enter sagebrush and shadscale, bears
N. and S.
- 40.55 Point for the $\frac{1}{2}$ sec. cor. of secs. 6 and 7, at propor-
tionate distance; there is no remaining evidence of the
original corner.
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T13N R9W

$\frac{1}{2}$ — $\frac{S6}{S7}$

1968

Dependent Resurvey of the Subdivision,
T. 13 N., R. 9 W.

CHAINS	
	<p>Set steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.</p>
41.36	Trail road, bears N. and S.
58.85	Trail road, bears N. 3° E. and S. 3° W.
81.50	<p>The cor. of secs. 1, 6, 7 and 12, on the W. bdy. of the Tp., monumented with an iron post, 2½ ins. diam., set, mkd. and witnessed as described in the field notes of T. 13 N., R. 10 W., surveyed concurrently under this same group.</p> <p>Land, nearly level. Soil, clay. Timber, none. Undergrowth, sagebrush, shadscale and grass.</p>
	<p>From the cor. of secs. 5, 6, 7 and 8.</p> <p>N. 0° 19' E., bet. secs. 5 and 6.</p> <p>Over nearly level land through grassy reseeded area.</p>
1.49	Fence, bears E. and W.; leave reseeded area; enter sagebrush and shadscale.
41.04	<p>Point for the ¼ sec. cor. of secs. 5 and 6, at proportionate distance; there is no remaining evidence of the original corner.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T13N R9W ¼ S6 S5 1968</p> <p>Set steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.</p>
81.88	<p>The cor. of secs. 5, 6, 31 and 32, on the N. bdy. of the Tp., hereinbefore described.</p> <p>Land, nearly level. Soil, clay. Timber, none. Undergrowth, shadscale, sagebrush and grass.</p>

Dependent Resurvey of the Subdivision,
T. 13 N., R. 9 W.

CHAINS

General Description

The general elevation of Township 13 North, Range 9 West, is about 4,500 feet above sea level. The land is level to gently rolling. The soil is mainly clay. The east two tiers are private property, and mostly under cultivation. The general drainage is in a southwesterly direction. Sagebrush and shadscale is found throughout the township. A dense growth of juniper is found in portions of sections 14, 15, 22 and 23. There is a reseeded area which covers portions of sections 5, 6, 7, 8, 17 and 18. The township is accessible by a gravel road from Snowville to Locomotive Springs and by numerous trail roads located throughout the township. No water was noted.

CERTIFICATE OF SURVEY

I, Fred R. Chappell, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 20th day of February, 19 69, I have dependently resurveyed the south boundary (Third Standard Parallel No the east and north boundaries and the subdivisional lines of Township 13 Nor Range 9 West

of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

April 22, 1969 (Date)

Fred R. Chappell (Cadastral Surveyor) SUPERVISORY

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

SUBMITTED FOR APPROVAL Date MAY 23 1969

BUREAU OF LAND MANAGEMENT, Washington, D. C.

The foregoing field notes of the dependent resurvey of the south boundary (Third St Parallel North), the east and north boundaries and the subdivisional lines Township 13 North, Range 9 West, Salt Lake Meridian, Utah

executed by Fred R. Chappell, Supervisory Cadastral Surveyor having been critically examined and found correct, are hereby approved.

MAR 9 1970 (Date)

Clark I. Lamm (Chief, Division of Engineering) Chief, Division of Cadastral Survey

CERTIFICATE OF TRANSCRIPT

I CERTIFY That the foregoing transcript of the field notes of the above described surveys in, is a true copy of the original field notes.

(Date)

(Chief, Division of Engineering)