

Volume

#

R0587

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

ORIGINAL

FIELD NOTES

1

OF THE

DEPENDENT RESURVEY OF THE NORTH BOUNDARY

(THIRD STANDARD PARALLEL SOUTH)

A PORTION OF THE SOUTH BOUNDARY

THE EAST BOUNDARY

AND

A PORTION OF THE SUBDIVISIONAL LINES

OF

T. 16 S., R. 10 E.

Of the SALT LAKE

In the State of UTAH

EXECUTED BY

Craig P. Sylvester

Supervisory Cadastral Surveyor

RECEIVED
BUREAU OF LAND MGMT.
MAY 21 1969
71 JUN 21 PM 2:50
Meridian
LAND OFFICE

Under special instructions dated April 4, 19 69, which provided for the surveys
included under Group Number 506, approved April 22, 1969,
and assignment instructions dated June 2, 19 69.

Survey commenced June 18, 19 69

Survey completed August 29, 19 69

INDEX DIAGRAM

Township 16 SOUTH, Range 10 EAST
 2 3 4 4 5 6

6 60 59	8 50 58	4 43 50	8 32 42	2 23 31	1 11 22
7 57 56	8 49 55	9 41 48	10 30 40	11 21 29	12 11 20
18 54 53	17 48 53	16 39 47	15 27 38	14 19 27	13 10 18
19 52	20	21 37 37	22 26 36	23 17 25	24 9 16
30	29	28 35 46	27 24 34	26 15 23	25 8 15
31	32 45	33 33 13	34	35 14	36 7 12

T. 16 S., R. 10 E.

CHAINS

The history of surveys of T. 16 S., R. 10 E., is as follows:

<u>Part Surveyed</u>	<u>Original Survey by - Date</u>	<u>Resurvey by - Date</u>
<u>North Boundary (Third Standard Parallel South)</u>		
West 3 miles	A. D. Ferron 1873	A. D. Ferron 1880
East 3 miles	A. D. Ferron 1880	
<u>West Boundary</u>		
All	A. D. Ferron 1873	A. D. Ferron 1881 J. C. Clark 1940
<u>South Boundary</u>		
West 3 miles	A. D. Ferron 1880	A. D. Ferron 1883
East 3 miles	A. D. Ferron 1883	J. T. Breckon 1891
<u>East Boundary</u>		
All	A. D. Ferron 1883	J. T. Breckon 1895
<u>Subdivisions</u>		
All Portion	J. T. Breckon 1895	J. T. Breckon 1897

The following field notes are those of the dependent resurvey of the north boundary which is the Third Standard Parallel South, the south 4 miles of the east boundary, the 1st and 4th miles west of the south boundary, a retracement of the north 2 miles of the east boundary, and a dependent resurvey of a portion of the subdivisional lines of T. 16 S., R. 7 E. The retracement and resurvey were executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1947, and Special Instructions for Group No. 506, Utah dated April 4, 1969.

Before restoring the corners, the lines of the original survey were retraced and diligent search made for any evidence of the original corner, bearing trees or other calls of the original field note record.

The rules of proportionate measurement were applied to ascertain the position of the lost corners, but not until exhausting every reasonable possibility of finding direct evidence for the control of each particular corner.

The direction of all lines were determined by observations on the sun and carried forward by sustained angulation, and the distances were determined by chaining where possible; otherwise, by triangulation. The details of such triangulations have been thoroughly verified and in order to simplify the record the diagrams and reductions are omitted from these field notes.

T. 16 S., R. 10 E.

CHAINS

The geographic position of the southeast corner of the township is at Latitude $39^{\circ} 22' 56.282''$ N. and Longitude $110^{\circ} 44' 19.607''$ W., as determined by the U. S. Geological Survey during the survey of this township.

The magnetic declination was read at a number of stations throughout the survey and the average of the readings was found to be $15^{\circ} 30' E.$

Dependent Resurvey of the Third Standard
Parallel South Through Range 10 East

Reestablishment of the Survey and Resurvey Executed
by A. D. Ferron in 1873 and 1880, Respectively.

Beginning at the standard corner of T. 15 S., Rs. 9 and 10 E., monumented with a sandstone, 20x8x8 ins., firmly set and plainly marked 6 notches on the N., E., and W. edges, and SC chiseled in the N. face.

From the above standard corner, it's witness corner, bears N. $89^{\circ} 56' W.$, 1.40 chs. dist., an iron post, 3 ins. in diam., firmly set in a mound of stone, with brass cap mkd.

SC
T15S
R9E | R10E
S36 | S31 WC
1940

From the above standard township corner, the true point for the closing cor. of T. 16 S., Rs. 9 and 10 E., bears N. $89^{\circ} 56' W.$, 0.42 chs. dist., established from record course and distance from its witness cor. which bears S. $1^{\circ} 20' E.$, 1.00 ch. dist., an iron post, 3 ins. diam., 12 ins. above ground, with brass cap mkd.

WC
T15S R9E
S36
S1 | S6
R9E R10E
T16S
1940
CC

S. $89^{\circ} 53' E.$, along the S. bdy. of sec. 31.

Over nearly level land, through shadscale and salt grass.

28.15 Fence, bears N. $2^{\circ} 45' W.$, and S. $2^{\circ} 45' E.$

40.40 Point for the standard $\frac{1}{4}$ section corner of sec. 31 at proportionate distance. There is no remaining evidence of the orig. corner.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

Dependent Resurvey of the Third Standard
Parallel South Through Range 10 East

CHAINS

SC
T15S R10E
½ S31
T16S
1969

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.

- 72.35 Canal, 30 lks. wide, 4 ft. deep, drains irregularly N.
80.60 Unimproved dirt road, bears N. 0° 45' E. and S. 0° 45' W.
80.80 Point for the standard corner of secs. 31 and 32 at proportionate distance. There is no remaining evidence of the orig. corner.

Set an iron post, 30 ins. long, 2½ ins. diam., 30 ins. in the ground, with brass cap mkd.

SC
T15S R10E
S31 S32
1969

Set a steel fence post, 6 ft. long, 30 ins. in the ground alongside iron post.

Corner falls on E. side of dirt road.

Land, nearly level.

Soil, clay.

No timber.

Undergrowth, sagebrush and salt grass.

S. 89° 53' E., along the S. bdy. of sec. 32.

Over nearly level pasture land.

- .26 Fence, bears N. 0° 45' E. and S. 0° 45' W.
40.40 Point for the standard ½ sec. cor. of sec. 32 at proportionate distance. There is no remaining evidence of the orig. corner.
Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

SC
T15S R10E
½ S32
1969

Set a steel fence post, 6 ft. long, 2 ft. in the ground alongside iron post.

- 80.35 Fence, bears N. and S.
80.80 Point for the standard cor. of secs. 32 and 33 at proportionate distance. There is no remaining evidence of the orig. corner.
Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

SC
T15S R10E
S32 S33
1969

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.

Dependent Resurvey of the Third Standard
Parallel South Through Range 10 East

CHAINS

Land, nearly level pasture.
Soil, clay.
No timber.
Undergrowth, salt grass.

S. 89° 53' E., along the S. bdy. of sec. 33.

Over nearly level land, through shadscale and salt grass.

40.40 Point for the standard $\frac{1}{2}$ sec. cor. of sec. 33 at proportionate distance. There is no remaining evidence of the orig. corner.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

SC
T15S R10E
<u>$\frac{1}{2}$ S33</u>
1969

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.

80.80 Point for the standard cor. of secs. 33 and 34 at proportionate distance. There is no remaining evidence of the orig. corner.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

SC
T15S R10E
<u>S33 S34</u>
1969

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.

Land, nearly level.
Soil, clay.
No timber.
Undergrowth, shadscale and salt grass.

Reestablishment of the Survey Executed
by A. D. Ferron in 1880.

S. 89° 53' E., along the S. bdy. of sec. 34.

Over nearly level land, through shadscale and salt grass.

38.30 Canal, 40 lks. wide, 3 ft. deep, drains irregularly S.

38.60 Trail road along E. side of canal.

39.75 Fence, bears N. and S.

40.40 Point for the standard $\frac{1}{2}$ sec. cor. of sec. 34 at proportionate distance. There is no remaining evidence of the orig. corner.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

Dependent Resurvey of the Third Standard
Parallel South Through Range 10 East

CHAINS

SC
T15S R10E
½ S34
1969

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.

40.90 Improved gravel road, bears S. 0° 54' E.

78.30 Fence, bears N. and S.

80.80 Point for the standard cor. of secs. 34 and 35 at proportionate distance. There is no remaining evidence of the orig. corner.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

SC
T15S R10E
S34 S35
1969

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.

Land, nearly level.

Soil, clay.

No timber.

Undergrowth, shadscale and salt grass.

S. 89° 53' E., along the S. bdy. of sec. 35 for control purposes, topography omitted.

Over nearly level land.

40.40 The standard ½ sec. cor. of sec. 35 which is monumented with a sandstone, 17x10x9 ins., firmly set and plainly mkd. ½ on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

SC
T15S R10E
½ S35
1969

Bury orig. stone cor. alongside iron post.

Set a steel fence post, 6 ft. long, 2 ft. in the ground alongside iron post.

S. 89° 19' E., beginning new measurement.

40.26 The standard cor. of secs. 35 and 36 which is marked by a mound of stone. This position has long been recognized as the corner by adjacent land owners, and is accepted as the best existing evidence of the position of the orig. corner. The orig. cor., a sandstone, 14x12x10 ins., was found hanging in a fence, 62 lks. W., plainly mkd. SC.

Dependent Resurvey of the Third Standard
Parallel South Through Range 10 East

CHAINS

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

SC
T15S R10E
<u>S35 S36</u>
1969

Bury orig. stone cor. alongside iron post.

Raise a mound of stone, $2\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

Land, nearly level.
Soil, clay.
No timber or undergrowth.

N. $89^{\circ} 25'$ E., along the S. bdy. of sec. 36 for control purposes.

Over nearly level land.

40.56 The standard $\frac{1}{4}$ sec. cor. of sec. 36 which is monumented with a sandstone, 9x8x4 ins., firmly set and plainly mkd $\frac{1}{4}$ on N. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

SC
T15S R10E
<u>$\frac{1}{4}$ S36</u>
1969

Bury orig. stone cor. alongside iron post.

N. $89^{\circ} 24'$ E., beginning new measurement.

39.85 The standard cor. of T. 15 S., Rs. 10 and 11 E., which is marked by an iron pipe, 2 ins. diam., driven in the ground. This position has long been recognized as the corner by adjacent land owners, and is accepted as the best existing evidence of the position of the orig. cor. This corner also functions as the closing corner of T. 16 S., Rs. 10 and 11 E.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

SC
T15S
R10E S11E
<u>S36 S31</u>
S1 S6
C C
R10E R11E
T16S
196

Dependent Resurvey of the Third Standard
Parallel South Through Range 10 East

CHAINS

No accessories available.

Land, nearly level.

Soil, clay.

No timber or undergrowth.

Dependent Resurvey of the East Boundary
of Township 16 South, Range 10 East

Reestablishment of the Independent Resurvey
Executed by J. T. Breckon in 1895.

The cor. of Tps. 16 and 17 S., Rs. 10 and 11 E., which is marked by a steel fence post, protruding 4 feet above ground. This corner was shown me by interested property owners, has long been recognized as the corner by adjacent land owners, and is accepted as the best existing evidence of the position of the orig. cor.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T16S
R10E R11E
S36 | S31
S1 | S6
T17S
1969

The geographic position of this corner was determined by the U. S. Geological Survey, during this survey, to be in Latitude $39^{\circ} 22' 56.282''$ N. and Longitude $110^{\circ} 44' 19.607''$ W.

Set a steel fence post, 6 ft. long, 2 ft. in the ground alongside iron post.

N. $0^{\circ} 37'$ W., bet. secs. 31 and 36.

Over gently rolling land, through shadscale and salt grass; asc. 75 ft. over gentle S. slope.

14.20 Ditch, 4 lks. wide, 2 ft. deep, drains E.

25.60 Improved gravel road, bears N. 26° E. and S. 26° W.

32.35 Improved gravel road, bears N. $69^{\circ} 45'$ E. and S. $69^{\circ} 45'$ W.

35.90 Ditch, 4 lks. wide, 2 ft. deep, drains S. 60° W.

40.28 Point for the $\frac{1}{2}$ sec. cor. of secs. 31 and 36 at proportionate distance. There is no remaining evidence of the orig. cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T16S
R10E R11E
 $\frac{1}{2}$
S36 | S31
1969

Dependent Resurvey, East Boundary, T. 16 S., R. 10 E.

CHAINS

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.

Ascend 100 feet over steep S. slope.

44.90 Top of ledge, bears N. 30° E. and S. 30° W.; desc. 35 feet over gentle N. slope.

77.20 Wash, 20 lks. wide, 5 feet deep, drains N. 30° W.

80.56 The cor. of secs. 25, 30, 31 and 36, which is monumented with a sandstone, 12x8x6 ins., firmly set and plainly mkd. 5 notches on N. and 1 notch on S. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T16S
R10E R11E
S25|S30
S36|S31
1969

Bury orig. stone cor. alongside iron post.

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.

Raise a mound of stone, 2 ft. base, 1½ ft. high, W. of corner.

Land, gently rolling.

Soil, clay.

No timber.

Undergrowth, shadscale and salt grass.

N. 0° 25' W., bet. secs. 25 and 30.

Over rolling hills, through shadscale and salt grass; asc. 35 ft. over S. slope.

3.50 Wash, 25 lks. wide, 4 ft. deep, drains N. 80° W.; desc. 80 ft. over N. slope.

15.20 Wash, 20 lks. wide, 4 ft. deep, drains N. 30° W.

39.99 The ¼ sec. cor. of secs. 25 and 30, which is monumented with a sandstone, 12x6x3 ins., firmly set and plainly mkd. ½ on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

T16S
R10E R11E
S25|S30
1969

Dependent Resurvey, East Boundary, T. 16 S., R. 10 E.

CHAINS

Bury orig. stone cor. alongside iron post.

N. 0°09' E., beginning new measurement.

18.50 Wash, 50 lks. wide, 8 ft. deep, drains irregularly E.

41.31 The cor. of secs. 19, 24, 25 and 30, which is monumented with a slatestone, 30x10x2 ins., firmly set in a mound of stone and dimly mkd. 4 notches on N. and 2 notches on S. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, with brass cap mkd.

T16S
R10E R11E
S24|S19
S25|S30
1969

Bury orig. stone cor. alongside iron post.

Raise a mound of stone, 2 ft. base, 1½ ft. high, W. of corner.

Land, rolling hills.

Soil, clay.

No timber.

Undergrowth, shadscale and salt grass.

N. 0° 14' W., bet. secs. 19 and 24.

Over gently rolling bench land, through shadscale and salt grass; asc. 40 ft. over gentle S. slope.

6.30 Wash, 20 lks. wide, 4 ft. deep, drains S. 30° E.

40.16 Point for the ¼ sec. cor. of secs. 19 and 24 at proportionate distance. There is no remaining evidence of the orig. corner.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T16S
R10E R11E
¼
S24|S19
1969

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.

Descend 80 feet over N. slope.

61.65 Wash, 15 lks. wide, 4 ft. deep, drains N. 10° W.

80.32 Point for the cor. of secs. 13, 18, 19 and 24 at proportionate distance. There is no remaining evidence of the orig. corner.

Dependent Resurvey, East Boundary, T. 16 S., R. 10 E.

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T16S
R10E R11E
S13 | S18
S24 | S19

1969

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.

Raise a mound of stone, $2\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, N. of corner.

Land, gently rolling.
Soil, clay.
No timber.
Undergrowth, shadscale and salt grass.

N. 0° 14' W., bet. secs. 13 and 18.

Over rolling and broken land, through shadscale and salt grass; desc. 35 ft. over N. slope.

2.90 Wash, 10 lks. wide, 1 ft. deep, drains irregularly E.; asc. 35 ft. over S. slope.

10.50 Wash, drains S. 70° E.

40.16 Point for the $\frac{1}{4}$ sec. cor. of secs. 13 and 18 at proportionate distance. There is no remaining evidence of the orig. corner.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T16S
R10E R11E
 $\frac{1}{4}$
S13 | S18
1969

No accessories available.

Ascend 70 feet over S. slope.

60.24 Point for the N. $\frac{1}{16}$ sec. cor. of secs. 13 and 18 at midpoint bet. the $\frac{1}{4}$ sec. cor. of secs. 13 and 18 and the cor. of secs. 7, 12, 13 and 18.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground and in a collar of stone, with brass cap mkd.

T16S
R10E R11E
N
 $\frac{1}{16}$
S13 | S18
1969

Descend 60 feet over N. slope.

Dependent Resurvey, East Boundary, T. 16 S., R. 10 E.

CHAINS

75.65	Trail road, bears E. and W.
80.32	<p>Point for the cor. of secs. 7, 12, 13 and 18 at proportionate distance. There is no remaining evidence of the orig. corner.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T16S R10E R11E <u>S12 S7</u> <u>S13 S18</u> 1969</p> <p>Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.</p> <p>Land, rolling and broken. Soil, rocky clay. No timber. Undergrowth, shadscale and salt grass.</p>
40.16	<p>N. 0° 14' W., bet. secs. 7 and 12 for control purposes, topography omitted.</p> <p>Point for the ¼ sec. cor. of secs. 7 and 12 at proportionate distance, falls on private property. Point not monumented. There is no remaining evidence of the orig. corner.</p>
80.32	Point for the cor. of secs. 1, 6, 7 and 12 at proportionate distance, falls on private property. Point not monumented. There is no remaining evidence of the orig. corner.
40.16	<p>N. 0° 14' W., bet. secs. 1 and 6 for control purposes, topography omitted.</p> <p>Point for the ¼ sec. cor. of secs. 1 and 6 at proportionate distance, falls on private property. Point not monumented. There is no remaining evidence of the orig. corner.</p>
78.40	The standard cor. of Tps. 15 S., Rs. 10 and 11 E. Also the closing cor. of Tps. 16 S., Rs. 10 and 11 E., previously described.
Dependent Resurvey of the South Boundary of Township 16 South, Range 10 East	
Reestablishment of the Resurvey Executed by J. T. Breckon in 1891.	
From the cor. of Tps. 16 and 17 S., Rs. 10 and 11 E.	

Dependent Resurvey, South Boundary, T. 16 S., R. 10 E.

CHAINS

N. 89° 27' W., bet. secs. 1 and 36.

Over gently rolling land, through shadscale and tumble weeds; asc. 25 ft. over gentle E. slope.

10.10 Trail road, bears irregularly N. and S.

18.30 Trail road, bears N. 42° E. and S. 42° W.

20.14 Point for the E. 1/16 sec. cor. of secs. 1 and 36.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T16S R10E
E1/16 $\frac{S36}{S1}$

T17S
1969

No accessories available.

Ascend 30 feet over gentle E. slope.

40.28 Point for the ¼ sec. cor. of secs. 1 and 36 at proportionate distance. There is no remaining evidence of the orig. corner.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone, with brass cap mkd.

T16S R10E
¼ $\frac{S36}{S1}$

T17S R10E
1969

From this cor., the SW. cor. of the old Victor Cemetery, bears N. 65° 9' E., 8.22 chs. dist.

Ascend 105 feet over E. slope.

45.00 Wash, 30 lks. wide, 4 ft. deep, drains irregularly S. 45° E.

48.85 Ridge, bears N. 50° E. and S. 50° W.

65.70 Trail road on top of small spur, bears irregularly N. 30° E. and S. 30° W.; desc. 35 ft. over gentle W. slope.

80.56 The cor. of secs. 1, 2, 35 and 36, which is monumented with a sandstone, 14x10x3 ins., firmly set and plainly mkd. 5 notches on W. and 1 notch on E. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone, with brass cap mkd.

Dependent Resurvey, South Boundary, T. 16 S., R. 10 E.

CHAINS

T16S R10E
S35|S36
 S2|S1
 T17S R10E
 1969

Corner falls in cor. of fences, bearing N.
 S. and W.

Land, gently rolling.
 Soil, rocky clay.
 No timber.
 Undergrowth, shadscale and tumbleweed.

Reestablishment of the Resurvey
 Executed by A. D. Ferron in 1883.

The cor. of secs. 3, 4, 33 and 34, determined by cor. of fences which bear N., S. and E. This position has long been recognized as the corner by adjacent land owners, and is accepted as the best existing evidence of the position of the orig. corner.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T16S R10E
S33|S34
 S4|S3
 T17S R10E
 1969

From this corner, a U. S. Bureau of Sport Fisheries and Wildlife witness cor. marker, bears S. 45° E., 0.03 chs., with a brass cap set in concrete mkd.

No. 16
 W C
33|34
 4|3
 T17S R10E
 1967

I destroyed all markings except No. 16 and 1967, and mkd. 1969 under 1967.

S. 89° 38' W., bet. secs. 4 and 33.

Over nearly level land, through shadscale and salt grass.

20.15 Improved dirt road, bears N. and S.

31.00 Trail road, bears irregularly N. 40° W. and S. 40° E.

40.33 Point for the ¼ sec. cor. of secs. 4 and 33 at proportionate distance. There is no remaining evidence of the orig. corner.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

Dependent Resurvey, South Boundary, T. 16 S., R. 10 E.

CHAINS

T16S R10E

 $\frac{1}{2}$ $\frac{S33}{S4}$

T17S R10E

1969

From this cor., a $\frac{3}{4}$ in. pipe, mkd. 7A2, bears S. 66° 37' E., 0.17 chs. dist. A temporary cor. set by the U. S. Bureau of Sport Fisheries and Wildlife.

- 40.55 Fence, bears S. and N., 40 lks. to fence bearing W. and E. 36 lks.; thence N., thence along S. side of fence line.
- 60.00 Fence, bears N. and S.
- 74.15 Corner of fences bearing W., N. and S. 14 lks. to end.
- 80.66 The cor. of secs. 4, 5, 32 and 33, determined longitudinally by the centerline of a road bearing N. and S., and latitudinally by an old fence bearing E. and W.

At the cor. point

Bury broken glass, 1 ft. deep, in road.

From which,

An iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., set 24 ins. in the ground for a reference monument, bears N. 41° 10' E., 31 ft. dist., with brass cap mkd. T16S R10E S33 31FT RM 1969 and an arrow pointing to the true corner.

An iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., set 24 ins. in the ground for a reference monument, bears S. 77° 25' E., 38 ft. dist., with brass cap mkd. T17S R10E S4 38 FT RM 1969 and an arrow pointing to the true corner.

Dependent Resurvey of a Portion of the
Subdivisional Lines of T. 16 S., R. 10 E.

Reestablishment of the Survey
Executed by J. T. Breckon in
1895.

- From the cor. of secs. 1, 2, 35 and 36 on the S. bdy. of the Tp.
- N. 0° 32' W., bet. secs. 35 and 36 for control purposes, topography omitted.
- 40.25 Point for the $\frac{1}{2}$ sec. cor. of secs. 35 and 36 at proportionate distance, falls in improved dirt road bearing E. and W. on private property. Point not monumented. There is no remaining evidence of the orig. corner.
- 80.50 Point for the cor. of secs. 25, 26, 35 and 36, at proportionate distance. There is no remaining evidence of the orig. corner.

Dependent Resurvey, T. 16 S., R. 10 E.

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T16S R10E

S26 | S25

S35 | S36

1969

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.

From the cor. of secs. 25, 30, 31 and 36 on the E. bdy. of the Tp.

N. $89^{\circ} 27'$ W., bet. secs. 25 and 36.

Over gently rolling land, through shadscale and salt grass; desc. 35 ft. over gentle W. slope.

- 1.80 Draw, drains N. 15° W.
- 8.50 Draw, drains N. 5 chs. to junction.
- 16.60 Draw, drains irregularly N.
- 34.25 Draw, drains N. 15° W.
- 38.00 Small draw, drains N. 6 chs. to junction.
- 40.21 Point for the $\frac{1}{2}$ sec. cor. of secs. 25 and 36 at proportionate distance. There is no remaining evidence of the orig. corner.
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.
- T16S R10E
- $\frac{1}{2}$ — S25
- S36
- 1969
- Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.
- Descend 110 ft. over gentle W. slope.
- 40.50 Draw, drains irregularly N.
- 60.80 Draw, drains N. 10° W.
- 80.42 The cor. of secs. 25, 26, 35 and 36.
- Land, gently rolling.
Soil, rocky clay.
No timber.
Undergrowth, shadscale and salt grass.

N. $0^{\circ} 01'$ E., bet. secs. 25 and 26.

Over nearly level land, through greasewood.

- 7.40 Wash, 40 lks. wide, 10 ft. deep, drains irregularly NE.

Dependent Resurvey, T. 16 S., R. 10 E.

CHAINS

- 23.80 Small wash, drains E.
32.40 Wash, 20 lks. wide, 4 ft. deep, drains irregularly E.
40.25 Point for the $\frac{1}{2}$ sec. cor. of secs. 25 and 26 at proportionate distance. There is no remaining evidence of the orig. corner.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T16S R10E

$\frac{1}{2}$
S26 | S25

1969

Raise a mound of stone, $2\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, W. of corner.

- 46.50 Wash, 20 lks. wide, 4 ft. deep, drains S. 40° E.
80.50 The cor. of secs. 23, 24, 25 and 26, which is monumented with a sandstone, 13x10x7 ins., firmly set and plainly mkd. 2 notches on S. and 1 notch on E. edges.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T16S R10E

S23 | S24
S26 | S25

1969

Bury orig. stone cor. alongside iron post.

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.

Land, nearly level.
Soil, clay.
No timber.
Undergrowth, greasewood.

From the cor. of secs. 19, 24, 25 and 30 on the E. bdy. of the Tp.

S. $89^\circ 48'$ W., bet. secs. 24 and 25.

Over gently rolling land, through shadscale and salt grass.

- 8.00 Wash, 10 lks. wide, 2 ft. deep, drains S. 50° E.
20.70 Wash, 10 lks. wide, 3 ft. deep, drains S. 40° E.
32.00 Wash, 10 lks. wide, 4 ft. deep, drains S. 10° W.
34.40 Wash, 15 lks. wide, 4 ft. deep, drains S. 40° E.

Dependent Resurvey, T. 16 S., R. 10 E.

CHAINS

40.11 The $\frac{1}{4}$ sec. cor. of secs. 24 and 25, which is monumented with a sandstone, 20x18x2 ins., firmly set and plainly mkd. $\frac{1}{4}$ on N. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T16S R10E

$\frac{1}{4}$ $\frac{S24}{S25}$

1969

Bury orig. stone cor. alongside iron post.

No accessories available.

N. $89^{\circ} 53'$ W., beginning new measurement.

35.90 Wash, 6 lks. wide, $1\frac{1}{2}$ ft. deep, drains S. 80° E.

40.08 The cor. of secs. 23, 24, 25 and 26.

Land, gently rolling.

Soil, clay.

No timber.

Undergrowth, shadscale and salt grass.

Reestablishment of the Survey Executed by
J. T. Breckon in 1895 and the Corrective
Survey by J. T. Breckon in 1897.

N. $0^{\circ} 14'$ W., bet. secs. 23 and 24.

Over nearly level land, through shadscale and salt grass; desc. 40 ft. over gentle N. slope.

1.70 Wash, 6 lks. wide, $1\frac{1}{2}$ ft. deep, drains irregularly E.

40.07 Point for the $\frac{1}{4}$ sec. cor. of secs. 23 and 24 at proportionate distance. There is no remaining evidence of the orig. corner.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T16S R10E

$\frac{1}{4}$ S23|S24

1969

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.

Dependent Resurvey, T. 16 S., R. 10 E.

CHAINS

60.105 Point for the N. 1/16 sec. cor. of secs. 23 and 24.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T16S R10E
N.
1/16
S23|S24
1969

No accessories available.

61.45 Wash, 5 lks. wide, 3 ft. deep, drains irregularly N. 70° E.

80.14 Point for the cor. of secs. 13, 14, 23 and 24 at proportionate distance. There is no remaining evidence of the orig. corner.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T16S R10E
S14|S13
S23|S24
1969

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.

Land, nearly level.

Soil, clay.

No timber.

Undergrowth, shadscale and salt grass.

Reestablishment of the Survey
Executed by J. T. Breckon in
1895.

From the cor. of secs. 13, 18, 19 and 24 on the E. bdy. of the Tp.

S. $89^\circ 51'$ W., bet. secs. 13 and 24.

Over gently rolling bench land, through shadscale and salt grass; asc. 35 ft. over gentle E. slope.

- 1.95 Top of ridge; desc. 50 ft. over gentle W. slope.
- 13.55 Bottom of draw, drains N. 10° W.; asc. 30 ft. over gentle E. slope.
- 17.30 Top of ridge; desc. 60 ft. over W. slope.
- 20.10 Wash, 12 lks. wide, 2 ft. deep, drains N. 10° W.

Dependent Resurvey, T. 16 S., R. 10 E.

CHAINS

39.00 Wash, 30 lks. wide, 6 ft. deep, drains irregularly N. 50° E.

40.08 Point for the $\frac{1}{2}$ sec. cor. of secs. 13 and 24 at proportionate distance. There is no remaining evidence of the orig. corner.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground and in a collar of stone, with brass cap mkd.

T16S R10E

$\frac{1}{2}$ $\frac{S13}{S24}$

1969

Continue over level land.

53.35 Wash, 15 lks. wide, 5 ft. deep, drains N. 60° E.

60.00 Wash, drains S. 60° E.

80.16 The cor. of secs. 13, 14, 23 and 24.

Land, level to gently rolling.

Soil, clay.

No timber.

Undergrowth, shadscale and salt grass.

Reestablishment of the Survey Executed by J. T. Breckon in 1895 and the Corrective Survey by J. T. Breckon in 1897.

N. 0° 14' W., bet. secs. 13 and 14.

Over nearly level land, through shadscale and salt grass.

16.25 Wash, 60 lks. wide, 5 ft. deep, drains irregularly S. 20° E.

40.07 Point for the $\frac{1}{2}$ sec. cor. of secs. 13 and 14 at proportionate distance. There is no remaining evidence of the orig. corner.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T16S R10E

$\frac{1}{2}$
S14|S13

1969

No accessories available.

60.105 Point for the N. 1/16 sec. cor. of secs. 13 and 14.

Dependent Resurvey, T. 16 S., R. 10 E.

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone, with brass cap mkd.

T16S R10E

N

1/16

S14|S13

1969

68.45 Fence, bears E. and W. 2.50 chs.; thence N. 50° W.

80.14 Point for the cor. of secs. 11, 12, 13 and 14, at proportionate distance. There is no remaining evidence of the orig. corner.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T16S R10E

S11|S12

S14|S13

1969

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.

Land, nearly level.

Soil, clay.

No timber.

Undergrowth, shadscale and salt grass.

From the cor. of secs. 7, 12, 13 and 18, on the E. bdy. of the Tp.

S. 89° 42' W., bet. secs. 12 and 13.

Over nearly level land, through shadscale and salt grass.

40.10 Point for the ¼ sec. cor. of secs. 12 and 13 at proportionate distance. There is no remaining evidence of the orig. corner.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T16S R10E

¼ — S12

S13

1969

No accessories available.

45.65 Ditch, 5 lks. wide, 1½ ft. deep, drains S. 40° E.

54.10 Small ridge, bears N. 50° E. and S. 50° W.

60.15 Point for the W. 1/16 sec. cor. of secs. 12 and 13.

Dependent Resurvey, T. 16 S., R. 10 E.

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T16S R10E
W1/16 $\frac{S12}{S13}$

1969

Raise a mound of stone, $2\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, N. of corner.

74.40 Wash, 60 lks. wide, 15 ft. deep, drains S. 15° E.

76.00 Enter cultivated land.

80.20 The cor. of sections 11, 12, 13 and 14.

Land, nearly level.

Soil, clay.

No timber.

Undergrowth, shadscale and salt grass.

N. 0° 16' W., bet. secs. 11 and 12.

Over nearly level cultivated land.

14.55 Leave cultivated land; fence, bears E. and W.

15.05 Trail road, bears irregularly E. and W.

15.75 Wash, 30 lks. wide, 7 ft. deep, drains irregularly E.

16.15 Enter cultivated land.

20.035 Point for the S. $1/16$ sec. cor. of secs. 11 and 12.

Set an iron post, 30 ins. long, 2 ins. diam., 24 ins. in the ground, with brass cap mkd.

T16S R10E
S
1/16
S11||S12
1969

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.

30.30 Trail road, bears S. 50° E. and N. 50° W., 2.25 chs.; thence N. Leave cultivated land.

31.60 Ditch, 3 lks. wide, 2 ft. deep, drains irregularly E.

32.95 Trail road, bears irregularly E. and W.

40.07 Point for the $\frac{1}{2}$ sec. cor. of secs. 11 and 12 at proportionate distance. There is no remaining evidence of the orig. corner.

Dependent Resurvey, T. 16 S., R. 10 E.

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground and in a collar of stone, with brass cap mkd.

T16S R10E

$\frac{1}{4}$
S11|S12
1969

51.40 Fence, bears S. 40° W. and N. 40° E., 50 lks. to fence cor.; thence N. and E.

52.30 Ditch, 4 lks. wide, 1 ft. deep, drains irregularly E.

60.105 Point for the N. $1/16$ sec. cor. of secs. 11 and 12.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T16S R10E

N
1/16
S11|S12
1969

No accessories available.

76.80 Trail road, bears irregularly E. and W.

80.14 Point for the cor. of secs. 1, 2, 11 and 12 at proportionate distance. There is no remaining evidence of the orig. corner.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T16S R10E

$\frac{S2|S1}{S11|S12}$
1969

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.

Land, level and cultivated.

Soil, clay.

No timber or undergrowth.

From the point for the cor. of secs. 1, 6, 7 and 12 on the E. bdy. of the Tp.

S. $89^\circ 32'$ W., bet. secs. 1 and 12 for control purposes, topography omitted.

40.10 Point for the $\frac{1}{2}$ sec. cor. of secs. 1 and 12 at proportionate distance, falls on private property. Point not monumented. There is no remaining evidence of the orig. corner.

80.20 The cor. of secs. 1, 2, 11 and 12.

Dependent Resurvey, T. 16 S., R. 10 E.

CHAINS

N. $0^{\circ} 24'$ W., bet. secs. 1 and 2 for control purposes, topography omitted.

40.08 Point for the $\frac{1}{2}$ sec. cor. of secs. 1 and 2 at proportionate distance, falls on private property. Point not monumented. There is no remaining evidence of the orig. corner.

78.26 Intersect the Third Standard Parallel South on the S. bdy. of sec. 35, T. 15 S., R. 10 E.

Point for the closing cor. of secs. 1 and 2 at proportionate distance bet. the standard cor. of secs. 35 and 36, and the standard $\frac{1}{2}$ sec. cor. of sec. 35. There is no remaining evidence of the orig. closing corner.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T15S R10E
 S35
 S2 | S1
 C | C
 T16S R10E
 1969

Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, S. of corner.

From this closing cor., the standard cor. of secs. 35 and 36, bears S. $89^{\circ} 19'$ E., 0.10 chs. distant.

Reestablishment of the Survey
 Executed by J. T. Breckon in 1895.

From the cor. of secs. 25, 26, 35 and 36.

S. $89^{\circ} 57'$ W., bet. secs. 26 and 35.

Over gently rolling bench land, through greasewood.

20.13 Point for the E. $\frac{1}{16}$ sec. cor. of secs. 26 and 35.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T16S R10E
 E1/16 S26
 S35
 1969

No accessories available.

25.00 Wash, drains NE.

40.26 Point for the $\frac{1}{2}$ sec. cor. of secs. 26 and 35 at proportionate distance. There is no remaining evidence of the orig. corner.

Dependent Resurvey, T. 16 S., R. 10 E.

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T16S R10E

$\frac{1}{4}$ $\frac{S26}{S35}$

1969

No accessories available.

- 52.00 Wash, drains SE.
 60.00 East end of fence.
 80.52 The cor. of secs. 26, 27, 34 and 35, determined by cor. of fences which bear E., W. and N. This position is accepted as the best existing evidence of the position of the orig. corner.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T16S R10E

$\frac{S27}{S34}$ $\frac{S26}{S35}$

1969

Land, gently rolling.
 Soil, clay.
 No timber.
 Undergrowth, greasewood.

N. $0^{\circ}03'$ E., bet. secs. 26 and 27.

Over gently rolling land, through shadscale and salt grass, along a fence line.

- 18.00 Wash, 1.50 chs. wide, 30 ft. deep, drains N. 70° E.; fence ends.
 24.55 South edge of pond.
 29.85 North edge of pond; thence along a fence line.
 39.85 Trail road, bears irregularly N. 25° W. and E.
 40.10 Ditch, 5 lks. wide, 6 ins. deep, drains irregularly E.
 40.17 The $\frac{1}{4}$ sec. cor. of secs. 26 and 27, determined by cor. of fences which bear N., S. and E. This position is accepted as the best existing evidence of the position of the orig. corner.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T16S R10E

$\frac{1}{4}$ $\frac{S27}{S26}$

1969

Dependent Resurvey, T. 16 S., R. 10 E.

CHAINS

N. 0° 06' W., beginning new measurement.

Continue along fence line.

20.135 Point for the N. 1/16 sec. cor. of secs. 26 and 27.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T16S R10E

N

1/16

S27|S26

1969

No accessories available.

24.00 Fence cor., fences bear S., E., and N. 60° W.

40.27 The cor. of secs. 22, 23, 26 and 27, determined by cor. of fences which bear N. and W. This position is accepted as the best existing evidence of the position of the orig. corner.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T16S R10E

S22|S23

S27|S26

1969

Land, gently rolling.

Soil, clay.

No timber.

Undergrowth, shadscale and salt grass.

From the cor. of secs. 23, 24, 25 and 26.

S. 89° 45' W., bet. secs. 23 and 26.

Over nearly level bench land, through salt grass.

40.28 The ¼ sec. cor. of secs. 23 and 26, which is monumented with a sandstone, 12x8x5 ins., firmly set and dimly mkd. ¼ on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone, with brass cap mkd.

T16S R10E

¼ — S23

S26

1969

Bury orig. stone cor. alongside iron post.

Dependent Resurvey, T. 16 S., R. 10 E.

CHAINS

- S. 89° 58' W., beginning new measurement.
- 6.50 Small wash, drains S. 50° E.
- 40.29 The cor. of secs. 22, 23, 26 and 27.
- Land, nearly level.
Soil, clay.
No timber.
Undergrowth, salt grass.
- N. 0° 22' W., bet. secs. 22 and 23.
- Over nearly level land, through salt grass, along a fence line.
- 40.32 The $\frac{1}{2}$ sec. cor. of secs. 22 and 23, determined by corner of fences which bear S. and W. This position is accepted as the best existing evidence of the position of the orig. corner.
- At the cor. point
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T16S R10E

 $\frac{1}{2}$
S22|S23

1969

-
- N. 0° 08' E., beginning new measurement.
- 9.80 Small wash, drains irregularly E.
- 31.40 Small wash, drains N. 40° E.
- 40.38 The cor. of secs. 14, 15, 22 and 23, which is monumented with a badly deteriorated sandstone, 9x6x4 ins. (record calls for a sandstone, 18x12x4 ins.), firmly set and plainly mkd. 3 notches on S. edge. The notches on the E. edge are obliterated.
- At the cor. point
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T16S R10E

S15|S14
S22|S23

1969

Bury orig. stone cor. alongside iron post.

No accessories available.

Land, nearly level.
Soil, clay.
No timber.
Undergrowth, salt grass.

Dependent Resurvey, T. 16 S., R. 10 E.

CHAINS

From the cor. of secs. 13, 14, 23 and 24.

N. 89° 42' W., bet. secs. 14 and 23.

Over nearly level land, through salt grass and shadscale.

1.00

Enter cultivated land.

40.19

Point for the $\frac{1}{4}$ sec. cor. of secs. 14 and 23 at proportionate distance. There is no remaining evidence of the orig. corner.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T16S R10E

$\frac{1}{4}$ $\frac{S14}{S23}$

1969

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.

A trail road, 24 lks. S. of cor., bears irregularly E. and W. An irrigation ditch, 13 lks. N. of cor. drains E.

54.50

Leave cultivated land, irrigation ditch drains SE.

60.285

Point for the W. $\frac{1}{16}$ sec. cor. of secs. 14 and 23.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T16S R10E

W1/16 $\frac{S14}{S23}$

1969

No accessories available.

80.38

The cor. of secs. 14, 15, 22 and 23.

Land, nearly level.

Soil, clay.

No timber.

Undergrowth, shadscale and salt grass.

Reestablishment of the Corrective Resurvey
Executed by J. T. Breckon in 1897.

N. 1° 20' W., bet. secs. 14 and 15.

Over nearly level land, through shadscale and salt grass.

Dependent Resurvey, T. 16 S., R. 10 E.

CHAINS

19.85 Point for the S. 1/16 sec. cor. of secs. 14 and 15.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T16S R10E
S
1/16
S15|S14
1969

No accessories available.

39.70 The ¼ sec. cor. of secs. 14 and 15, which is monumented with a limestone, 10x7x5 ins., firmly set and plainly mkd. ¼ on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T16S R10E
¼
S15|S14
1969

Bury orig. stone cor. alongside iron post.

No accessories available.

N. 0° 48' E., beginning new measurement.

13.60 Improved gravel road, bears N. 70° E. and S. 70° W.

20.15 Trail road, bears irregularly N. 40° W. and S. 40° E.

21.25 Ditch, 5 lks. wide, 1 ft. deep, drains S. 45° E.

23.90 Enter cultivated land.

28.60 Leave cultivated land.

36.10 Wash, 50 lks. wide, 10 ft. deep, drains irregularly E.

40.71 The cor. of secs. 10, 11, 14 and 15, which is monumented with a badly deteriorated sandstone, 8x8x6 ins. (record calls for a sandstone, 18x12x9 ins.), firmly set and dimly mkd. 4 notches on S. and 2 notches on E. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T16S R10E
S10|S11
S15|S14
1969

Dependent Resurvey, T. 16 S., R. 10 E.

CHAINS

Bury orig. stone cor. alongside iron post.

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.

Land, nearly level.

Soil, clay.

No timber.

Undergrowth, shadscale and salt grass.

From the cor. of secs. 11, 12, 13 and 14.

N. 89° 30' W., bet. secs. 11 and 14.

Over nearly level land, through shadscale and salt grass.

12.55 Fence, bears N. and S.

13.85 Ditch, 3 lks. wide, 8 ins. deep, drains S. 40° W.

16.90 Trail road, bears irregularly N. 60° E. and S. 60° W.

20.115 Point for the E. 1/16 sec. cor. of secs. 11 and 14.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T16S R10E
E1/16 $\frac{S11}{S14}$

1969

No accessories available.

24.10 Top of low spur, slopes S.

34.30 Trail road, bears N. 70° E. and S. 70° W.

34.80 Ditch, 5 lks. wide, 1 ft. deep, drains S. 70° W.

40.23 Point for the ¼ sec. cor. of secs. 11 and 14 at proportionate distance, falls in an irrigation ditch where a corner cannot be perpetuated. There is no remaining evidence of the orig. corner.

40.46 Point selected for the witness ¼ sec. cor. of secs. 11 and 14.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T16S R10E
¼ $\frac{S11}{S14}$ → W
C

1969

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.

Dependent Resurvey, T. 16 S., R. 10 E.

CHAINS

- 52.90 Ditch, 2 lks. wide, 8 ins. deep, drains S.
- 57.35 Trail road, bears irregularly N. 40° E. and S. 40° W.
- 71.50 Wash, 30 lks. wide, 7 ft. deep, drains S.
- 78.20 Wash, 15 lks. wide, 5 ft. deep, drains S. 40° E.
- 80.46 The cor. of secs. 10, 11, 14 and 15.
- Land, nearly level.
Soil, clay.
No timber.
Undergrowth, shadscale and salt grass.
- N. 0° 20' W., bet. secs. 10 and 11.
- Over gently rolling land, through shadscale and salt grass; asc. 100 ft. over gentle S. slope.
- 3.95 Trail road, bears irregularly E. and W.; irrigation ditch along south side of road, drains W.
- 40.14 Point for the $\frac{1}{4}$ sec. cor. of secs. 10 and 11 at proportionate distance. The orig. sandstone cor., 14x10x5 ins. was found lying loose on top of ground at the base of a steep SE. slope, plainly marked $\frac{1}{4}$.
- Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.
- T16S R10E
 $\frac{1}{4}$
S10|S11
1969
- Bury orig. stone corner alongside iron post.
- No accessories available.
- Ascend 25 feet over S. slope.
- 53.35 Top of ridge, bears E. and W.; desc. 95 ft. over N. slope.
- 60.21 Point for the N. 1/16 sec. cor. of secs. 10 and 11.
- Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.
- T16S R10E
N
1/16
S10|S11
1969
- Raise a mound of stone, 2 $\frac{1}{2}$ ft. base, 1 $\frac{1}{2}$ ft. high, W. of corner.

Dependent Resurvey, T. 16 S., R. 10 E.

CHAINS

- 76.70 Trail road, bears irregularly E. and W.
 78.04 Canal, 15 lks. wide, 3 ft. deep, drains E.
 79.00 Trail road, bears irregularly E. and W.
- 80.28 Point for the cor. of secs. 2, 3, 10 and 11 at proportionate distance. There is no remaining evidence of the orig. corner.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T16S R10E

S3	S2
S10	S11

1969

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.

Land, gently rolling.
 Soil, clay.
 No timber.
 Undergrowth, shadscale and salt grass.

From the cor. of secs. 1, 2, 11 and 12.

N. $89^{\circ} 27'$ W., bet. secs. 2 and 11.

Over nearly level land, through shadscale and salt grass.

- 23.10 Wash, 12 lks. wide, 3 ft. deep, drains irregularly N.
 27.20 Wash, 12 lks. wide, 3 ft. deep, drains irregularly N.
 40.20 Ditch, 3 lks. wide, 2 ft. deep, drains irregularly N.
 40.27 Point for the $\frac{1}{4}$ sec. cor. of secs. 2 and 11 at proportionate distance. There is no remaining evidence of the orig. corner.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T16S R10E

$\frac{1}{4}$	S2
	S11

1969

Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of corner.

- 45.45 Ditch, 6 lks. wide, 2 ft. deep, drains N. 20° E.
 49.00 Trail road, bears irregularly N. and S.
 56.45 Ditch, 3 lks. wide, 1 ft. deep, drains N. 10° W.
 60.10 Ditch, 4 lks. wide, $1\frac{1}{2}$ ft. deep, drains N. 50° W.

Dependent Resurvey, T. 16 S., R. 10 E.

CHAINS

- 79.45 Fence, bears N. and S.
- 80.54 The cor. of secs. 2, 3, 10 and 11.
 Land, nearly level.
 Soil, clay.
 No timber.
 Undergrowth, shadscale and salt grass.
- N. 0° 41' W., bet. secs. 2 and 3.
 Over gently rolling land, through shadscale and salt grass; desc. 40 ft. over gentle N. slope.
- 4.95 Fence, bears E. and W.
- 8.55 Enter cultivated land.
- 26.55 Leave cultivated land.
- 27.95 Wash, 1.00 ch wide, 10 ft. deep, drains irregularly E.
- 40.14 Point for the $\frac{1}{2}$ sec. cor. of secs. 2 and 3 at proportionate distance. There is no remaining evidence of the orig. corner.
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T16S R10E

 $\frac{1}{2}$
S3|S2

1969

Bury broken glass at the bottom of the iron post.

Continue over level farm land.

- 56.10 Fence, bears E. and W.
- 76.60 Fence, bears E. and W. Irrigation ditch on N. side of fence, drains E.
- 78.06 Intersect the Third Standard Parallel South on the S. bdy. of sec. 34, T. 15 S., R. 10 E.
 Point for the closing cor. of secs. 2 and 3 at proportionate distance bet. the standard cor. of secs. 34 and 35, and the standard $\frac{1}{2}$ sec. cor. of sec. 34. There is no remaining evidence of the orig. corner.
 Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T15S R10E

S34
S3|S2
C|C

T16S R10E

1969

Dependent Resurvey, T. 16 S., R. 10 E.

CHAINS

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.

From this closing cor., the standard cor. of secs. 34 and 35, bears S. 89° 53' E., 0.33 chs. distance.

Land, gently rolling.

Soil, clay.

No timber.

Undergrowth, shadscale and salt grass.

Reestablishment of the Survey Executed
by J. T. Breckon in 1895.

From the cor. of secs. 3, 4, 33 and 34 on the S. bdy. of the Tp.

N. 0°08' W., bet. secs. 33 and 34.

Over level land, through shadscale and salt grass, along a fence line.

19.70 Fence, bears S., E. and W.

20.105 Point for the S. 1/16 sec. cor. of secs. 33 and 34.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T16S R10E

S

1/16

S33|S34

1969

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.

40.21 The ½ sec. cor. of secs. 33 and 34, determined longitudinally by proportionate measurement and latitudinally by the centerline of paved county road bearing E. and W.

At the cor. point

Drive a 3 in. spike in pavement.

From which,

An iron post, 30 ins. long, 2½ ins. diam., set 24 ins. in the ground, for a reference monument, bears S. 29° 54' E., 39 ft. dist., with brass cap mkd. RM T16S R10E ½ S34 39 FT 1969, and an arrow pointing to the true corner.

An iron post, 30 ins. long, 2½ ins. diam., set 24 ins. in the ground for a reference monument, bears S. 47° 24' W., 47 ft. dist., with brass cap mkd. RM T16S R10E ½ S33 47 FT 1969, and no arrow pointing to the true corner.

CHAINS

- N. $0^{\circ}08'$ W., beginning new measurement.
- 0.70 Fence, bears E. and W.
- 20.25 Wash, 25 lks. wide, 7 ft. deep, drains S. 60° E.
- 23.30 Wash, 12 lks. wide, 4 ft. deep, drains S. 70° E.
- 27.10 Trail road, bears irregularly E. and W.
- 39.40 Trail road, bears irregularly E. and W.
- 39.53 Fence corner, bears E. 25 lks. distance; fences bear N., E. and W.
- 39.78 The cor. of secs. 27, 28, 33 and 34, determined one rod N. and one rod W. of cor. of fences bearing E., W. and N. Interested property owners told me that there used to be an old lane bearing E., W. and N., and that the cor. was one rod N. and one rod W. from the cor. of fences.
- At the cor. point
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.
- | |
|-------------------------|
| T16S R10E |
| <u>S28</u> <u>S27</u> |
| S33 S34 |
| 1969 |
- Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.
- Land, level.
Soil, clay.
No timber.
Undergrowth, shadscale and salt grass.
- From the cor. of secs. 26, 27, 34 and 35.
- S. $89^{\circ}54'$ W., bet. secs. 27 and 34.
- Over level farm land, through salt grass, along fence line.
- 40.03 The $\frac{1}{2}$ sec. cor. of secs. 27 and 34, determined by cor. of fences which bear E., W. and N. This position is accepted as the best existing evidence of the position of the orig. corner.
- At the cor. point
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.
- | |
|----------------------------|
| T16S R10E |
| $\frac{1}{2}$ — <u>S27</u> |
| S34 |
| 1969 |
- Powerline, bears E. and W. along fence line.
- S. $89^{\circ}41'$ W., beginning new measurement.

Dependent Resurvey, T. 16 S., R. 10 E.

CHAINS


Continue along fence line.

- 21.30 Gravel county road, bears N. and S,
- 39.96 Fence, bears N. and S. 25 lks. to cor. of a fence bearing E. and W.
- 40.21 The cor. of secs. 27, 28, 33 and 34.
Land, level.
Soil, clay.
No timber.
Undergrowth, salt grass.

N. 0° 23' W., bet. secs. 27 and 28.


Over nearly level land, through shadscale and salt grass.

- 33.10 Wash, 40 lks. wide, 10 ft. deep, drains N. 80° W.
- 39.40 Wash, 150 lks. wide, 15 ft. deep, drains irregularly E.
- 40.09 Point for the 1/2 sec. cor. of secs. 27 and 28 at proportionate distance, falls in a wash, 5 lks. wide, 8 ft. deep, drains irregularly S. 10° E.; there is no remaining evidence of the orig. corner.
- 41.21 Point selected for the witness 1/2 sec. cor. of secs. 27 and 28.
Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.



No accessories available.

- 44.50 Enter cultivated land.
- 58.00 Leave cultivated land.
- 62.80 Canyon, 6.00 chs. wide, 45 ft. deep, drains irregularly S. 30° E.
- 74.00 Fence, bears N. 69° W. and S. 69° E.
- 77.60 Fence, bears irregularly N. 80° E. and S. 80° W.
- 80.18 The cor. of secs. 21, 22, 27 and 28, determined longitudinally by proportionate measurement and latitudinally by an old fence bearing E. and W.
At the cor. point
Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.



No accessories available.

Dependent Resurvey, T. 16 S., R. 10 E.

CHAINS

Land, nearly level.
Soil, clay.
No timber.
Undergrowth, shadscale and salt grass.

From the cor. of secs. 22, 23, 26 and 27.

S. 89° 56' W., bet. secs. 22 and 27.

Over nearly level land, through shadscale and salt grass, along a fence line.

- 14.54 Fence, bears N., S., E. and W.
17.35 Fence, bears N., S., E. and W.
20.22 Point for the E. 1/16 sec. cor. of secs. 22 and 27.
Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T16S R10E
E1/16 $\frac{S22}{S27}$
1969

No accessories available.

- 26.20 East edge of pond.
27.60 West edge of pond.
35.00 Trail road, bears N. 80° E., and W.; thence along road.
40.44 The ½ sec. cor. of secs. 22 and 27 determined longitudinally by the extension of a fence bearing N. and S., and latitudinally by the center of a lane bearing E. and W.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T16S R10E
½ $\frac{S22}{S27}$
1969

S. 89° 16' W., beginning new measurement.

- 21.30 Gravel county road, bears N. and S.; thence along a fence line.
40.34 The cor. of secs. 21, 22, 27 and 28.

Land, nearly level.
Soil, clay.
No timber.
Undergrowth, shadscale and salt grass.

Dependent Resurvey, T. 16 S., R. 10 E.

CHAINS

S. 89° 54' W., bet. secs. 21 and 28 for control purposes, topography omitted.

40.37 Point for the $\frac{1}{4}$ sec. cor. of secs. 21 and 28 at proportionate distance, falls on private property. Point not monumented. There is no remaining evidence of the orig. corner.

80.74 The cor. of secs. 20, 21, 28 and 29, determined by cor. of fences which bear E., W. and S. This position is accepted as the best existing evidence of the position of the orig. corner.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T16S R10E	
S20	S21
S29	S28
1969	

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.

From the cor. of secs. 21, 22, 27 and 28.

N. 0° 04' W., bet. secs. 21 and 22.

Over nearly level land, through shadscale and salt grass.

.10 Enter cultivated land.

2.65 Fence, bears E. and W.

14.10 Leave cultivated land.

26.90 Fence, bears E. and W.

39.94 The $\frac{1}{4}$ sec. cor. of secs. 21 and 22, which is monumented with a badly deteriorated sandstone, 14x8x5 ins. (record calls for a sandstone, 16x12x8 ins.), firmly set and dimly marked $\frac{1}{4}$ on W. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T16S R10E	
$\frac{1}{4}$	
S21	S22
1969	

Bury orig. stone cor. alongside iron post.

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.

Dependent Resurvey, T. 16 S., R. 10 E.

CHAINS

N. 0° 14' W., beginning new measurement.

- .65 Enter cultivated land. Trail road on edge of cultivated land, bears irregularly N. 60° E. and S. 60° W.
- 12.75 Fence, bears N. 50° W. and S. 50° E.; leave cultivated land.
- 40.14 Point for the cor. of secs. 15, 16, 21 and 22 at proportionate distance. There is no remaining evidence of the orig. corner.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T16S R10E
S16|S15
S21|S22
 1969

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.

Land, nearly level.
 Soil, clay.
 No timber.
 Undergrowth, shadscale and salt grass.

From the cor. of secs. 14, 15, 22 and 23.

S. 89° 06' W., bet. secs. 15 and 22.

Over gently rolling hills, through shadscale and salt grass; asc. 160 ft. over gentle E. slope.

- 40.41 Point for the ½ sec. cor. of secs. 15 and 22 at proportionate distance. There is no remaining evidence of the orig. corner.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone, with brass cap mkd.

T16S R10E
 ½ — S15
 S22
 1969

Corner is located about 15 ft. below top of ridge that bears irregularly N. 70° W. and S. 70° E.

Descend 75 feet over gentle W. slope.

- 60.615 Point for the W. 1/16 sec. cor. of secs. 15 and 22.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

Dependent Resurvey, T. 16 S., R. 10 E.

CHAINS

T16S R10E
 W1/16 $\frac{S15}{S22}$
 1969

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.

- 62.20 County road, bears N. and S.
 76.85 Fence, bears N. 30° W. and S. 30° E.
 79.30 Fence, bears N. and S.
 80.82 The cor. of secs. 15, 16, 21 and 22.

Land, gently rolling hills.
 Soil, clay.
 No timber.
 Undergrowth, shadscale and salt grass.

N. 0° 26' W., bet. secs. 15 and 16.

Over nearly level land, through shadscale and salt grass.

- 5.10 Fence, bears N. 86° 30' W. and S. 86° 30' E.
 7.40 Ditch, 8 lks. wide, 1½ ft. deep, drains irregularly S. 40° E.
 12.50 Ditch, 3 lks. wide, 10 ins. deep, drains irregularly S. 50° E.
 17.15 Improved dirt road, bears irregularly N. 80° W. and S. 80° E.
 40.14 Point for the ¼ sec. cor. of secs. 15 and 16 at proportionate distance. There is no remaining evidence of the orig. corner.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T16S R10E
 $\frac{1}{4}$
 S16|S15
 1969

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.

- 58.89 Fence cor., bears S. 88° 06' W., 10 lks. distance, with fences bearing N., and N. 88° 06' E.
 60.21 Point for the N. 1/16 sec. cor. of secs. 15 and 16.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T16S R10E
 N
 1/16
 S16|S15
 1969

Dependent Resurvey, T. 16 S., R. 10 E.

CHAINS

No accessories available.

- 80.28 The cor. of secs. 9, 10, 15 and 16, which is monumented with a badly deteriorated sandstone, 10x9x3 ins., firmly set at cor. of fences which bear N., S. and W., and plainly mkd. 1 notch on S. face. Other notches obliterated. (Record calls for a sandstone, 16x12x6 ins. with 4 notches on S. and 3 notches on E. edges.)

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T16S R10E

S9	S10
S16	S15

1969

Bury orig. stone cor. alongside iron post.

Land, nearly level.

Soil, clay.

No timber.

Undergrowth, shadscale and salt grass.

From the cor. of secs. 10, 11, 14 and 15.

S. 89° 01' W., bet. secs. 10 and 15.

Over nearly level land, through shadscale and salt grass.

- 7.90 Wash, 60 lks. wide, 8 ft. deep, drains S. 50° E.
- 11.85 Canal, 5 lks. wide, 1 ft. deep, drains S. 40° E.
- 12.45 Wash, 70 lks. wide, 10 ft. deep, drains N. 70° E.
- 20.25 Point for the E. 1/16 sec. cor. of secs. 10 and 15.
- Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T16S R10E

E1/16	S10
	S15

1969

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.

Cor. falls 1.60 chs. S. of a wash, 1.00 ch. wide, 12 ft. deep, drains irregularly E.

- 40.50 Point for the ¼ sec. cor. of secs. 10 and 15 at proportionate distance. There is no remaining evidence of the orig. corner.

Dependent Resurvey, T. 16 S., R. 10 E.

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T16S R10E

$$\frac{1}{2} \frac{S10}{S15}$$

1969

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.

Corner falls 10 lks. N. of a wash, 20 lks. wide, 5 ft. deep, drains irregularly E.

48.00 Graveled road, bears N. $10^{\circ} 50'$ E. and S. $10^{\circ} 50'$ W. Enter cultivated land.

48.40 Fence, bears N. $10^{\circ} 50'$ E. and S. $10^{\circ} 50'$ W.

81.00 Leave cultivated land.

The cor. of secs. 9, 10, 15 and 16.

Land, nearly level.

Soil, clay.

No timber.

Undergrowth, shadscale and salt grass.

N. $0^{\circ} 08'$ W., bet. secs. 9 and 10.

Over gently rolling land, through shadscale and salt grass; asc. 75 ft. over gentle S. slope.

17.35 Wash, 40 lks. wide, 4 ft. deep, drains irregularly E.

20.20 Point for the S. $1/16$ sec. cor. of secs. 9 and 10.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T16S R10E

S

1/16

S9|S10

1969

No accessories available.

40.40 The $\frac{1}{2}$ sec. cor. of secs. 9 and 10, which is monumented with a sandstone, $21 \times 10 \times 8$ ins., loosely set at cor. of fences which bear S. and W. and plainly mkd. $\frac{1}{2}$.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground and in a collar of stone, with brass cap mkd.

Dependent Resurvey, T. 16 S., R. 10 E.

CHAINS

T16S R10E

 $\frac{1}{2}$
S9|S10

1969

Bury orig. stone cor. alongside iron post.

N. $0^{\circ} 02'$ W., beginning new measurement.

Asc. 35 ft. over gentle S. slope.

17.45 Top of small ridge; desc. 120 ft. over gentle N. slope.

40.48 Point for the cor. of secs. 3, 4, 9 and 10 at proportionate distance. There is no remaining evidence of the orig. corner.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground and in a collar of stone, with brass cap mkd.

T16S R10E

 $\frac{S4|S3}{S9|S10}$

1969

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.

Land, gently rolling.

Soil, clay.

No timber.

Undergrowth, shadscale and salt grass.

From the cor. of secs. 2, 3, 10 and 11.

S. $89^{\circ} 27'$ W., bet. secs. 3 and 10.

Over nearly level land, through shadscale and salt grass.

8.45 Canal, 15 lks. wide, 3 ft. deep, drains irregularly S. 80° E.22.50 Trail road, bears irregularly N. 80° W. and S. 80° E.36.65 Graveled county road, bears N. $0^{\circ} 54'$ E. and S. $0^{\circ} 54'$ W.40.31 Point for the $\frac{1}{2}$ sec. cor. of secs. 3 and 10 at proportionate distance. There is no remaining evidence of the orig. corner.Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T16S R10E

 $\frac{1}{2}$ $\frac{S3}{S10}$

1969

No accessories available.

Dependent Resurvey, T. 16 S., R. 10 E.

CHAINS	
80.62	<p>The cor. of secs. 3, 4, 9 and 10.</p> <p>Land, nearly level. Soil, clay. No timber. Undergrowth, shadscale and salt grass.</p>
	<p>N. 0° 51' W., bet. secs. 3 and 4.</p> <p>Over nearly level land, through shadscale and salt grass.</p>
2.70	Fence, bears N. 88° 04' E. and S. 88° 04' W.
12.50	Enter cultivated land.
19.50	Fence, bears N. 88° E. and S. 88° W.
20.24	<p>Point for the S. 1/16 sec. cor. of secs. 3 and 4.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>
	<p>T16S R10E S 1/16 S4 S3 1969</p>
	No accessories available.
22.75	Fence, bears N. 88° E. and S. 88° W.; leave cultivated land.
40.48	<p>Point for the ¼ sec. cor. of secs. 3 and 4 at proportionate distance. There is no remaining evidence of the orig. corner.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone, with brass cap mkd.</p>
	<p>T16S R10E ¼ S4 S3 1969</p>
78.97	<p>Intersect the Third Standard Parallel South on the S. bdy. of sec. 33, T. 15 S., R. 10 E.</p> <p>Point for the closing cor. of secs. 3 and 4 at proportionate distance between the standard cor. of secs. 33 and 34 and the standard ¼ sec. cor. of sec. 33. There is no remaining evidence of the orig. corner.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>

Dependent Resurvey, T. 16 S., R. 10 E.

CHAINS

T15S R10E
S33
 S4 | S3
 C C
 T16S R10E
 1969

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.

From this closing cor., the standard cor. of secs. 33 and 34, bears S. 89° 53' E., 0.35 chs. dist.

Land, nearly level.
 Soil, clay.
 No timber.
 Undergrowth, shadscale and salt grass.

Point for the $\frac{1}{4}$ sec. cor. of sec. 3 on the S. bdy. of sec. 34, T. 15 S., R. 10 E. at midpoint bet. the closing cor. of secs. 2 and 3 and the closing cor. of secs. 3 and 4.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T15S R10E
 $\frac{1}{4}$ S3
 T16S R10E
 1969

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.

From the above $\frac{1}{4}$ sec. cor, the standard $\frac{1}{4}$ sec. cor. of sec. 34, bears S. 89° 53' E., 0.34 chs. dist.

Point for the W. $\frac{1}{16}$ sec. cor. of sec. 3 on the S. bdy. of sec. 34, T. 15 S., R. 10 E. at midpoint bet. the $\frac{1}{4}$ sec. cor. of sec. 3 and the closing cor. of secs. 3 and 4.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T15S R10E
W $\frac{1}{16}$ S3
 T16S R10E
 1969

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.

From the cor. of secs. 4, 5, 32 and 33 on the S. bdy. of the Tp.

Dependent Resurvey, T. 16 S., R. 10 E.

CHAINS

N. 0° 23' W., bet. secs. 32 and 33.

Over nearly level land, through shadscale and salt grass.

40.21

The 1/2 sec. cor. of secs. 32 and 33, determined by the centerline of paved roads bearing N., S., E. and W., and by the cor. of fences bearing N., S., E. and W., on both sides of roads. This position is accepted as the best existing evidence of the position of the orig. cor.

At the cor. point

Drive a 3 in. spike in pavement.

From which,

An iron post, 30 ins. long, 2 1/2 ins. diam., set 24 ins. in the ground for a reference monument, bears N. 42° 53' E., 73.6 ft. dist., with brass cap mkd. RM T16S R10E 1/2 S33 73.6 FT 1969 and an arrow pointing to the true corner.

An iron post, 30 ins. long, 2 1/2 ins. diam., set 24 ins. in the ground for a reference monument, bears S. 43° 00' E., 71 ft. dist., with brass cap mkd. RM T16S R10E 1/2 S33 71 FT 1969 and an arrow pointing to the true corner.

Both iron posts set at fence corners.

N. 0° 27' W., beginning new measurement.

17.55

Intersection of gravel roads, bears N., S., E. and W.

19.75

Ditch, 12 lks. wide, 3 ft. deep, drains irregularly E.

19.97

Point for the N. 1/16 sec. cor. of secs. 32 and 33, falls in the center of an improved dirt road bearing N. and S.

Bury broken glass, 1 ft. deep, in road at true point.

From which,

An iron post, 30 ins. long, 2 1/2 ins. diam., set 24 ins. in the ground for a reference monument, bears N. 39° 00' E., 44 ft. dist., with brass cap mkd. RM T16S R10E N1/16 S33 44 FT 1969 and an arrow pointing to the true corner.

An iron post, 30 ins. long, 2 1/2 ins. diam., set 24 ins. in the ground, for a reference monument, bears S. 51° 45' E., 31 ft. dist., with brass cap mkd. RM T16S R10E N1/16 S33 31 FT 1969 and an arrow pointing to the true corner.

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside both iron posts.

Dependent Resurvey, T. 16 S., R. 10 E.

CHAINS

- 20.43 Improved dirt road, turns to N. 80° E.
- 39.70 Unimproved dirt road, bears E. and W.
- 39.94 The cor. of secs. 28, 29, 32 and 33, determined longitudinally by an old fence bearing N. and S. and latitudinally at midpoint bet. county road right-of-way fences on both sides of road, bearing E. and W.

At the cor. point

Bury broken glass, 1 ft. deep, in road.

From which,

An iron post, 30 ins. long, 2½ ins. diam., set 24 ins. in the ground, for a reference monument, bears S. 45° 08' E., 22 ft. dist., with brass cap mkd. RM T16S R10E S33 22 FT 1969 and an arrow pointing to the true corner.

An iron post, 30 ins. long, 2½ ins. diam., set 24 ins. in the ground for a reference monument, bears S. 53° 30' W., 21 ft. dist., with brass cap mkd. RM T16S R10E S32 21 FT 1969 and an arrow pointing to the true corner.

Land, nearly level.

Soil, clay.

No timber.

Undergrowth, shadscale and salt grass.

From the cor. of secs. 27, 28, 33 and 34.

S. 89° 45' W., bet. secs. 28 and 33.

Over nearly level land, through shadscale and salt grass.

- 20.20 Canal, 20 lks. wide, 8 ft. deep, drains irregularly N.
- 35.35 Fence, bears irregularly N. 35° E. and S. 35° W.
- 37.00 Fence, bears N. and S.
- 40.49 The ¼ sec. cor. of secs. 28 and 33, determined by the intersection of old lanes, bearing N. and W. This position is accepted as the best existing evidence of the orig. corner.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 28 ins. in the ground, with brass cap mkd.

T16S R10E

½	S28
	S33

1969

Corner falls in an old driveway to farm.

Dependent Resurvey, T. 16 S., R. 10 E.

CHAINS

S. 89° 50' W., beginning new measurement.

20.275 Point for the W. 1/16 sec. cor. of secs. 28 and 33, falls in an improved dirt road which bears E. and W.

Bury broken glass, 1 ft. deep, in road at true point.

From which,

An iron post, 30 ins. long, 2½ ins. diam., set 24 ins. in the ground, for a reference monument, bears S. 37° 00' E., 22 ft. dist., with brass cap mkd. RM T16S R10E W1/16 S33 22 FT 1969 and an arrow pointing to the true corner.

An iron post, 30 ins. long, 2½ ins. diam., set 24 ins. in the ground, for a reference monument, bears S. 40° 50' W., 23 ft. dist., with brass cap mkd. RM T16S R10E W1/16 S33 23 FT 1969 and an arrow pointing to the true corner.

40.55 The cor. of secs. 28, 29, 32 and 33.

Land, nearly level.

Soil, clay.

No timber.

Undergrowth, shadscale and salt grass.

From the cor. of secs. 15, 16, 21 and 22.

S. 89° 55' W., bet. secs. 16 and 21 for control purposes, topography omitted.

40.43 Point for the ½ sec. cor. of secs. 16 and 21 at proportionate distance, falls on private property. Point not monumented. There is no remaining evidence of the orig. corner.

80.86 The cor. of secs. 16, 17, 20 and 21, which is monumented with a sandstone, 18x8x7 ins., firmly set and plainly mkd. 4 notches on E. and 3 notches on S. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T16S R10E

S17|S16

S20|S21

1969

Bury orig. stone cor. alongside iron post.

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.

N. 0° 18' W., bet. secs. 16 and 17 for control purposes, topography omitted.

Dependent Resurvey, T. 16 S., R. 10 E.

CHAINS

- 40.20 Point for the $\frac{1}{2}$ sec. cor. of secs. 16 and 17 at proportionate distance, falls on private property. Point not monumented. There is no remaining evidence of the orig. corner.
- 80.40 The cor. of secs. 8, 9, 16 and 17, determined by cor. of fences which bear E., W. and N.. This position is accepted as the best existing evidence of the position of the orig. corner.
- At the cor. point
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.
- | |
|-----------------------|
| T16S R10E |
| <u>S8</u> <u>S9</u> |
| S17 S16 |
| 1969 |
- From the cor. of secs. 9, 10, 15 and 16.
- N. $89^{\circ} 53'$ W., bet. secs. 9 and 16.
- Over nearly level land, through shadscale and salt grass, along an old fence line.
- 23.60 Ditch, 8 lks. wide, 2 ft. deep, drains N. 50° W.
- 26.15 Ditch, 12 lks. wide, 3 ft. deep, drains N. 45° W.
- 39.00 Ditch, 4 lks. wide, 2 ft. deep, drains N. 40° W.
- 40.46 The $\frac{1}{2}$ sec. cor. of secs. 9 and 16, which is monumented with a sandstone, 20x16x7 ins., loosely set at cor. of fences which bear E., W. and N., and plainly mkd. $\frac{1}{2}$ on N. face.
- At the cor. point
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.
- | |
|-------------------------|
| T16S R10E |
| $\frac{1}{2}$ <u>S9</u> |
| S16 |
| 1969 |
- Bury orig. stone cor. alongside iron post.
-
- S. $89^{\circ} 57'$ W., beginning new measurement.
- Continue along an old fence line.
- 40.20 The cor. of secs. 8, 9, 16 and 17.
- Land, nearly level.
Soil, clay.
No timber.
Undergrowth, shadscale and salt grass.

CHAINS	
	N. 0° 07' W., bet. secs. 8 and 9.
	Over gently rolling land, through shadscale and salt grass, along an old fence line.
	Begin triangulation.
34.00	Corner of fence, bears S. and E.; leave fence line.
39.95	Fence, bears N. 85° W. and S. 85° E.
40.26	Point selected for the witness $\frac{1}{2}$ sec. cor. of secs. 8 and 9.
	Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.
	WC T16S R10E $\frac{1}{2}$ S8 1 S9 1969
	Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.
40.43	Point for the $\frac{1}{2}$ sec. cor. of secs. 8 and 9 at proportionate distance, falls in a road. There is no remaining evidence of the orig. corner.
	End triangulation.
	Ascend 90 feet over steep S. slope.
40.91	Concrete ditch, 4 lks. wide, $1\frac{1}{2}$ ft. deep, drains irregularly S. 60° E.
41.45	Canal, 6 lks. wide, 3 ft. deep, drains S. 70° W.
46.00	Top of ridge; desc. 30 ft. over N. slope.
50.65	Canal, 6 lks. wide, 4 ft. deep, drains N. 70° W.; asc. 35 ft. over S. slope.
51.85	Wash, 10 lks. wide, 4 ft. deep, drains irregularly E.
53.55	Canal, 6 lks. wide, 2 ft. deep, drains N. 80° E.
66.60	Top of ridge; desc. 95 ft. over N. slope.
69.75	Canal, 5 lks. wide, 1 ft. deep, drains irregularly W.
80.38	Wash, 10 lks. wide, 3 ft. deep, drains irregularly N. 30° W.
80.86	The cor. of secs. 4, 5, 8 and 9, which is marked by a juniper post, 6 ft. above ground, 10 ins. diam. This post was shown me by Lavon Oviatt, an interested property owner, and is accepted as the best available evidence of the position of the orig. corner.
	At the cor. point

Dependent Resurvey, T. 16 S., R. 10 E.

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground and alongside juniper post, with brass cap mkd.

T16S R10E

$$\begin{array}{r} \text{S5} | \text{S4} \\ \hline \text{S8} | \text{S9} \end{array}$$

1969

Land, gently rolling.
Soil, clay.
No timber.
Undergrowth, shadscale and salt grass.

From the cor. of secs. 3, 4, 9 and 10.

N. $89^{\circ} 57'$ W., bet. secs. 4 and 9.

Over nearly level land, through shadscale and salt grass.

- 8.90 Wash, 20 lks. wide, 2 ft. deep, drains N. 70° E.
34.70 Wash, 15 lks. wide, $1\frac{1}{2}$ ft. deep, drains irregularly N.
40.36 Point for the $\frac{1}{4}$ sec. cor. of secs. 4 and 9 at proportionate distance. There is no remaining evidence of the orig. corner.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground and in a collar of stone, with brass cap mkd.

T16S R10E

$$\frac{1}{4} \frac{\text{S4}}{\text{S9}}$$

1969

- 46.80 Improved dirt road, bears irregularly N. 60° E. and S. 60° W.
50.40 Wash, 6 lks. wide, 2 ft. deep, drains N. 10° E.
50.50 Wash, 10 lks. wide, 3 ft. deep, drains N. 50° E.
65.80 Trail road, bears S. 11° E. and N. 11° W.
80.62 Trail road, bears N. $56^{\circ} 30'$ W. and S. $56^{\circ} 30'$ E.
80.72 The cor. of secs. 4, 5, 8 and 9.

Land, nearly level.
Soil, clay.
No timber.
Undergrowth, shadscale and salt grass.

N. $0^{\circ} 51'$ W., bet. secs. 4 and 5.

Dependent Resurvey, T. 16 S., R. 10 E.

CHAINS		
	Over gently rolling land, through shadscale and salt grass.	
1.05	Trail road, bears irregularly SE. and N. 50° W.	
6.20	Irrigation ditch, 10 lks. wide, 4 ft. deep, drains E. Enter cultivated land.	
12.85	Leave cultivated land.	
14.15	Ditch, 8 lks. wide, 2 ft. deep, drains irregularly E.	
20.215	Point for the S. 1/16 sec. cor. of secs. 4 and 5. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone, with brass cap mkd.	
	T16S R10E S 1/16 S5 S4 1969	
	Ascend 30 feet over gentle S. slope.	
24.40	Top of ridge, bears irregularly E. and W.; desc. 50 ft. over N. slope.	
31.45	Leave low hills; enter flat.	
38.55	Trail road, bears N. 89° E. and S. 89° W.	
40.43	Point for the ¼ sec. cor. of secs. 4 and 5 at proportionate distance. There is no remaining evidence of the orig. corner. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone, with brass cap mkd.	
	T16S R10E ¼ S5 S4 1969	
41.40	Ditch, 10 lks. wide, 2 ft. deep, drains E.; desc. 35 ft. over gentle N. slope.	
79.04	Intersect the Third Standard Parallel South on the S. bdy. of sec. 32, T. 15 S., R. 10 E. Point for the closing cor. of secs. 4 and 5 at proportionate distance bet. the standard cor. of secs. 32 and 33 and the standard ¼ sec. cor. of sec. 32. There is no remaining evidence of the orig. corner. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.	

Dependent Resurvey, T. 16 S., R. 10 E.

CHAINS

T15S R10E

$$\frac{S32}{S5|S4}$$

C | C

T16S R10E

1969

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.

From this closing cor., the standard cor. of secs. 32 and 33, bears S. 89° 53' E., 0.29 chs. dist.

Land, gently rolling.

Soil, clay.

No timber.

Undergrowth, shadscale and salt grass.

Point for the $\frac{1}{4}$ sec. cor. of sec. 4 on the S. bdy. of sec. 33, T. 15 S., R. 10 E., at midpoint bet. the closing cor. of secs. 3 and 4 and the closing cor. of secs. 4 and 5.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T15S R10E

$$\frac{\frac{1}{4}}{S4}$$

T16S R10E

1969

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.

From this cor., the standard $\frac{1}{4}$ sec. cor. of sec. 33, bears S. 89° 53' E., 0.32 chs. dist.

The $\frac{1}{4}$ sec. cor. of secs. 19 and 20, determined by cor. of fences which bear N., S. and W. This position is accepted as the best existing evidence of the position of the orig. corner.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T16S R10E

$$\frac{\frac{1}{4}}{S19|S20}$$

1969

N. 0° 08' W., bet. secs. 19 and 20 for control purposes, topography omitted.

40.43

Point for the cor. of secs. 17, 18, 19 and 20 at proportionate distance, falls in an irrigation ditch where a cor. cannot be perpetuated. There is no remaining evidence of the orig. corner.

Point selected for the witness cor., bears S. 88° 30' W., 0.15 chs. dist., hereinafter described.

Dependent Resurvey, T. 16 S., R. 10 E.

CHAINS

From the cor. of secs. 16, 17, 20 and 21.

S. 89° 55' W., bet. secs. 17 and 20 for control purposes, topography omitted.

40.29

The $\frac{1}{4}$ sec. cor. of secs. 17 and 20, which is monumented with a sandstone, 12x10x10 ins., firmly set in a fence bearing N. and S. and plainly mkd. $\frac{1}{4}$ on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T16S R10E

$\frac{1}{4}$ $\frac{S17}{S20}$

1969

Bury orig. stone cor. alongside iron post.

N. 89° 14' W., beginning new measurement.

40.40

True point for the cor. of secs. 17, 18, 19 and 20.

S. 88° 30' W., bet. secs. 18 and 19.

Over nearly level land, through shadscale and salt grass.

.15

Point selected for the witness cor. of secs. 17, 18, 19 and 20.

T16S R10E

$\frac{S18}{S19}$ | $\frac{S17}{S20}$ W
C

1969

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.

6.00

Paved road, bears S. 71° E. and N. 71° W.

19.50

Corner of fences, bearing N. and S. 88° 30' W.; thence along fence.

40.45

Point for the $\frac{1}{4}$ sec. cor. of secs. 18 and 19, determined longitudinally by proportionate measurement and latitudinally by an old fence bearing E. and W., falls in an irrigation ditch.

S. 89° 51' W., beginning new measurement.

.19

Point selected for the witness $\frac{1}{4}$ sec. cor. of secs. 18 and 19.

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

Dependent Resurvey, T. 16 S., R. 10 E.

CHAINS

T16S R10E
 $\frac{1}{2}$ $\xrightarrow{\text{S18}}$ W
 S19 C
 1969

- .24 **Cor.** of fences bearing E., W. and N.
 Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.
- 40.24 The cor. of secs. 13, 18, 19 and 24 on the W. bdy. of the Tp., an iron post, 2 ins. diam., 12 ins. above ground, with brass cap mkd.
- T16S
 R9E R10E
 $\frac{\text{S13}}{\text{S24}} | \frac{\text{S18}}{\text{S19}}$
 1940
- Land, nearly level.
 Soil, clay.
 No timber.
 Undergrowth, shadscale and salt grass.
-
- Reestablishment of the Corrective Resurvey
 Executed by J. T. Breckon in 1897.
-
- From the cor. of secs. 17, 18, 19 and 20.
 N. 0° 24' W., bet. secs. 17 and 18.
 Over gently rolling land, through shadscale and salt grass, asc. 35 ft. over S. slope.
- 3.00 Top of small knoll, desc. 35 ft. over N. slope.
- 40.43 The $\frac{1}{2}$ sec. cor. of secs. 17 and 18, determined longitudinally by proportionate measurement, and latitudinally by an old fence bearing E. and W.
- At the cor. point
 Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.
- T16S R10E
 $\frac{1}{2}$
 S18 | S17
 1969
-
- N. 0° 24' W., beginning new measurement.
- 40.13 The cor. of secs. 7, 8, 17 and 18, determined longitudinally by proportionate measurement, and latitudinally by an old fence bearing E. and W.
- At the cor. point
 Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

Dependent Resurvey, T. 16 S., R. 10 E.

CHAINS

T16S R10E

S7	S8
S18	S17

1969

Land, gently rolling.
Soil, clay.
No timber.
Undergrowth, shadscale and salt grass.

From the cor. of secs. 8, 9, 16 and 17.

N. 88° 44' W., bet. secs. 8 and 17.

Over nearly level land, through shadscale and salt grass, along an old fence line.

- 7.55 Ditch, 8 lks. wide, 3 ft. deep, drains S. 80° E.
- 11.15 Culvert, 3 ft. diam., crosses under road, drains S. 60° E.
- 14.05 Dirt road, bears N. 50° W. and E.
- 20.00 Graded dirt road, bears N. and S.
- 20.21 Point for the E. 1/16 sec. cor. of secs. 8 and 17, falls in dirt road bearing N. and S.
- 20.45 Point selected for the witness E. 1/16 sec. cor. of secs. 8 and 17.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T16S R10E

E1/16	S8	W
	S17	C

1969

The cor. is located in a fence line that bears N. and S. in front of a house.

- 40.42 The ½ sec. cor. of secs. 8 and 17, determined longitudinally by proportionate measurement, and latitudinally by an old fence bearing E. and W.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone, with brass cap mkd.

T16S R10E

½	S8
	S17

1969

S. 89° 46' W., beginning new measurement.

Continue along an old fence line.

Dependent Resurvey, T. 16 S., R. 10 E.

CHAINS

- 12.80 Wash, 1.00 ch. wide, 10 ft. deep, drains irregularly S.
- 20.21 Point for the W. 1/16 sec. cor. of secs. 8 and 17.
- Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T16S R10E
W1/16 $\frac{S8}{S17}$
1969

No accessories available.

- 40.42 The cor. of secs. 7, 8, 17 and 18.
- Land, nearly level.
Soil, clay.
No timber.
Undergrowth, shadscale and salt grass.

Reestablishment of the Survey Executed
by J. T. Breckon in 1895.

S. 89° 43' W., bet. secs. 7 and 18.

Over nearly level land, along an old fence line.

- 33.10 East edge of fenced orchard and corral.
- 40.42 The ¼ sec. cor. of secs. 7 and 18, determined longitudinally by proportionate measurement, and latitudinally by an old fence bearing E. and W.
- At the cor. point
- Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T16S R10E
¼ $\frac{S7}{S18}$
1969

Cor. is located on the E. edge of an irrigation ditch that drains irregularly S.

S. 88° 24' W., beginning new measurement.

Continue along an old fence line.

- .80 Canal, 20 lks. wide, 2½ ft. deep, drains irregularly N.
- 8.60 Ascend 60 feet over low clay hills.

Dependent Resurvey, T. 16 S., R. 10 E.

CHAINS

- 18.00 Top of low clay spur, projects S. 20° W.; desc. 25 ft. over gentle W. slope.
- 21.20 Wash, 8 lks. wide, 3½ ft. deep, drains irregularly S. 30° W.
- 35.95 Fence, bears N. 11° 15' E. and S. 11° 15' W.
- 36.30 Wash, 15 lks. wide, 5 ft. deep, drains S. 10° W.
- 40.32 The cor. of secs. 7, 12, 13 and 18 on the W. bdy. of the Tp., which is monumented with an iron post, 2 ins. diam., 3 ins. above ground and in a collar of stone, with a steel fence post set alongside, with brass cap mkd.

T16S
R9E R10E
S12|S7
S13|S18
1940

Land, rolling.
Soil, clay.
No timber.

Reestablishment of the Resurvey Executed
by J. T. Breckon in 1897.

From the cor. of secs. 7, 8, 17 and 18.

N. 0° 11' W., bet. secs. 7 and 8.

Over nearly level land.

- 40.28 Point for the ¼ sec. cor. of secs. 7 and 8 at proportionate distance. There is no remaining evidence of the orig. corner.
- Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T16S R10E
¼
S7|S8
1969

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.

- 40.80 Canal, drains irregularly SE. from the W.
- 42.30 Graded dirt road, bears E. and W. 1.00 ch.; thence N.
- 80.56 Point for the cor. of secs. 5, 6, 7 and 8 at proportionate distance. There is no remaining evidence of the orig. corner.

Dependent Resurvey, T. 16 S., R. 10 E.

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T16S R10E

S6|S5
S7|S8

1969

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.

From this cor., U.S.G.S. Triangulation Station "Washboard," bears S. $44^{\circ} 52'$ W., 89.95 chs. dist., monumented with a $\frac{1}{2}$ inch reinforcement bar driven in the ground and protruding 1 inch above ground.

Land, nearly level.
Soil, clay.
No timber.

Reestablishment of the Survey Executed
by J. T. Breckon in 1895.

From the cor. of secs. 4, 5, 8 and 9.

N. $89^{\circ} 47'$ W., bet. secs. 5 and 8.

Over nearly level land, through shadscale and salt grass.

- .25 Wash, 10 lks. wide, 3 ft. deep, drains N. 30° W.
- 20.245 Point for the E. $\frac{1}{16}$ sec. cor. of secs. 5 and 8.
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T16S R10E

E1/16 S5
S8

1969

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.

- 23.00 Canal, 20 lks. wide, 1 ft. deep, drains NW.
- 30.30 Ascend 75 feet over NE. slope.
- 35.90 Top of spur, projects N. 50° W.
- 37.60 Descend 45 feet over SW. slope.
- 40.49 Point for the $\frac{1}{4}$ sec. cor. of secs. 5 and 8 at proportionate distance. There is no remaining evidence of the orig. corner.
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

Dependent Resurvey, T. 16 S., R. 10 E.

CHAINS

T16S R10E

$$\frac{1}{4} \frac{S5}{S8}$$

1969

Raise a mound of stone, 2 ft. base, 1½ ft. high,
N. of corner.

52.60 Draw, drains irregularly N. 10° E.; asc. 70 ft. over
E. slope.

64.00 Top of low bench.

74.70 Descend 30 feet over W. slope.

80.98 The cor. of secs. 5, 6, 7 and 8.

Land, nearly level.

Soil, rocky clay.

No timber.

Undergrowth, shadscale and salt grass.

S. 89° 06' W., bet. secs. 6 and 7.

Over rolling land, through shadscale and salt grass.

1.00 Graded dirt road, bears N. 11° E. and S. 11° W.

1.50 Fence, bears N. 11° E. and S. 11° W.

40.44 Point for the ¼ sec. cor. of secs. 6 and 7 at propor-
tionate distance. There is no remaining evidence of
the orig. corner.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T16S R10E

$$\frac{1}{4} \frac{S6}{S7}$$

1969

Raise a mound of stone, 2 ft. base, 1½ ft. high,
N. of corner.

60.30 Fence, bears N. 11° 10' E. and S. 11° 10' W.

80.80 The cor. of secs. 1, 6, 7 and 12 on the W. bdy. of the
Tp., which is monumented with an iron post, 2 ins. diam.,
5 ins. above ground, with brass cap mkd.

T16S
R9E R10E
$$\frac{S1|S6}{S12|S7}$$

1940

Land, rolling.

Soil, rocky clay.

No timber.

Undergrowth, shadscale and salt grass.

CHAINS

From the cor. of secs. 5, 6, 7 and 8.

N. $0^{\circ} 49'$ W., bet. secs. 5 and 6.

Over rolling land, through shadscale and salt grass.

40.28 Point for the $\frac{1}{4}$ sec. cor. of secs. 5 and 6 at proportionate distance. There is no remaining evidence of the orig. corner.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 29 ins. in the ground, with brass cap mkd.

T16S R10E
 $\frac{1}{4}$
 S6 | S5
 1969

Set a steel fence post, 6 ft. long, $2\frac{1}{2}$ ft. in the ground, alongside iron post.

The cor. is located on the W. edge of a graded dirt road that bears N. and S.

43.20 Gate in road; fence follows E. side of field road.

78.84 Intersect the Third Standard Parallel South on the S. bdy. of sec. 31, T. 15 S., R. 10 E.

Point for the closing cor. of secs. 5 and 6 at proportionate distance bet. the standard cor. of secs. 31 and 32 and the standard $\frac{1}{4}$ sec. cor. of sec. 31. There is no remaining evidence of the orig. corner.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 30 ins. in the ground, with brass cap mkd.

T15S R10E
 S31
 S6 | S5
 C | C
 T16S R10E
 1969

Set a steel fence post, 6 ft. long, $2\frac{1}{2}$ ft. in the ground, alongside iron post.

Corner is located on the W. edge of field road.

From this closing cor., the standard cor. of secs. 31 and 32, bears S. $89^{\circ} 53'$ E.: 0.35 chs. dist.

Land, nearly level.

Soil, clay.

No timber.

Undergrowth, shadscale and salt grass.

Point for the $\frac{1}{4}$ sec. cor. of sec. 5 on the N. bdy. of the Tp., at midpoint bet. the closing cor. of secs. 4 and 5 and the closing cor. of secs. 5 and 6.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

Dependent Resurvey, T. 16 S., R. 10 E.

CHAINS

T15S R10E

$$\frac{1}{2} \text{ S5}$$
 T16S R10E

1969

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.

From this cor., the standard $\frac{1}{2}$ sec. cor. of sec. 32, bears S. $89^{\circ} 53'$ E., 0.32 chs. dist.

Point for the $\frac{1}{2}$ sec. cor. of sec. 6 on the N. bdy. of the Tp., at proportionate distance bet. the closing cor. of secs. 5 and 6 and the closing cor. of Tp. 16 S., Rs. 9 and 10 E.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

$$\frac{1}{2} \text{ S6}$$
 T16S R10E

1969

From this cor., the standard $\frac{1}{2}$ sec. cor. of sec. 31, bears S. $89^{\circ} 53'$ E., 0.39 chs. dist.

General Description

The general elevation of T. 16 S., R. 10 E. varies from about 5,000 feet above sea level to about 6,000 feet above sea level. The land is rolling to nearly level. Farms are scattered throughout the township. The town of Elmo is located in the NE. portion of section 32. Low brush and grass covers most of the uncultivated land. There is no timber except for a few scattered scrub juniper. The soil is clay and rocky clay. There are no rivers or major bodies of water in the township. There appears to be no mineral development. The township is accessible by hard surfaced roads entering sections 3 and 30, and by numerous improved dirt roads and trail roads located throughout the township.

Blank

Page

I, ~~W.C.~~

Craig P. Sylvester

, HEREBY

CERTIFY upon honor that in pursuance of special instructions bearing date of the 4th day

of April, 1969, (I) ~~(W.C.)~~ have dependently resurveyed the North boundary, which is the Third Standard Parallel South, the first and fourth miles west of the South boundary, the East boundary, and a portion of the subdivisional lines of T. 16 S., R. 10 E.

at the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by (me), (us) and under (my) (our) direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

March, 30, 1970
(Date)

Craig P. Sylvester
(Cadastral Surveyor)
Supervisory

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

APPROVED FOR APPROVAL
DATE MAR 15 1970

BUREAU OF LAND MANAGEMENT
Washington, D.C.

The foregoing field notes of the dependent resurvey of the North boundary, which is the Third Standard Parallel South, the first and fourth miles west of the South boundary, the East boundary, and a portion of the subdivisional lines of T. 16 S., R. 10 E., Salt Lake Meridian, Utah

executed by Craig P. Sylvester, Supervisory Cadastral Surveyor

having been critically examined and found correct, are hereby approved.

APR 2 1970
(Date)

Frank J. Gunn
(Chief, Division of Cadastral Survey)

CERTIFICATE OF TRANSCRIPT

~~I certify that the foregoing transcript of the field notes of the above described surveys in~~
~~is a true copy of the original field notes.~~

(Date)

(Chief, Division of Cadastral Survey)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

67

ORIGINAL
FIELD NOTES

OF THE

DEPENDENT RESURVEY OF A PORTION OF THE THIRD STANDARD

PARALLEL SOUTH ALONG THE SOUTH BOUNDARY OF T15S R11E

AND THE

DEPENDENT RESURVEY OF THE EAST AND SOUTH BOUNDARIES

AND A

PORTION OF THE SUBDIVISIONAL LINES OF T16S R11E

RECEIVED
STATE & LAND OFFICE
SALT LAKE CITY, UTAH
JUN 21 PM 2:50
DEPT. OF INTERIOR
BUREAU OF LAND MGMT.

Of the SALT LAKE

Meridian,

the State of UTAH

EXECUTED BY

Craig P. Sylvester, Supervisory Cadastral Surveyor

Under special instructions dated APRIL 4, 19 69, which provided for the surveys

included under Group Number 506, approved APRIL 22, 1969

and assignment instructions dated JUNE 2, 19 69.

Survey commenced SEPTEMBER 2, 19 69

Survey completed NOVEMBER 21, 19 69

INDEX DIAGRAM

Township 16 SOUTH, Range 11 EAST
 2 2 3 4 5 6

6	74	5	60	4	49	3	38	2	27	1	17
73	73		59		48		37		26		
7	72	8	58	9	47	10	36	11	25	12	16
71	70		57		46		35		24		
18	69	17	56	18	45	15	34	14	24	18	15
68	67		55		44		33		23		
19	66	20	54	21	43	22	32	23	22	24	14
66	65		54		42		31		21		
30	64	29	52	28	41	27	30	26	20	25	13
63	62		51		40		30		19		
31	61	32	50	33	39	34	29	35	19	36	13
7	8		9		10		11		12		

Township 16 South, Range 11 East

CHAINS

The history of surveys of T. 16 S., R. 11 E., is as follows:

<u>Part Surveyed</u>	<u>Original Survey By - Date</u>	<u>Resurvey By - Date</u>
----------------------	----------------------------------	---------------------------

North Boundary (Third Standard Parallel South)

All	A. D. Ferron 1880	
-----	-------------------	--

West Boundary

All	A. D. Ferron 1883	J. T. Breckon 1895
-----	-------------------	--------------------

South Boundary

West 4 Miles	A. D. Ferron 1884	J. T. Breckon 1892
East 2 Miles	J. T. Breckon 1895	John W. Dougall 1913

East Boundary

All	J. T. Breckon 1895	John W. Dougall 1913
-----	--------------------	-------------------------

Subdivisions

All	J. T. Breckon 1895	J. T. Breckon 1897
-----	--------------------	--------------------

The following field notes are those of the dependent resurvey of the Third Standard Parallel South through R. 11 E. of the south boundary, the east boundary, and a portion of the subdivisional lines of T. 16 S., R. 11 E. The survey was executed in accordance with the specifications as set forth in the Manual of Instructions, 1947, and the Special Instructions dated April 4, 1969, Group No. 506.

Before restoring the corners, the lines of the original survey were retraced and a diligent search made for any evidence of the original corner, bearing trees or other calls of the original field note record.

The rules of proportionate measurement were applied to ascertain the position of the lost corners, but not until exhausting every reasonable possibility of finding direct evidence for the control of each particular corner.

The directions of the lines of survey were determined by sustained angulation carried forward from hour angle observations on Polaris and were verified throughout the work by numerous solar observations. The distances were determined by chaining where practical; otherwise by triangulation. The details of such triangulations have been thoroughly verified and in order to simplify the record, the diagrams and reductions are omitted from these field notes.

The geographic position of the southeast corner of the township is Latitude $39^{\circ} 22' 57.44''$ N. and Longitude $110^{\circ} 37' 37.11''$ W., as computed from the cor. of Tps. 16 and 17 S., Rs. 10 and 11 E., determined by the U. S. Geological Survey to be at Latitude $39^{\circ} 22' 56.282''$ N. and Longitude $110^{\circ} 44' 19.607''$ W.

Township 16 South, Range 11 East

CRACKS

The magnetic declination was read at a number of stations throughout the survey and the average of the readings was found to be 15° 30' E.

Dependent Resurvey of a Portion of the Third Standard Parallel South Along the South Boundary of T. 15 S., R. 11 E.

Reestablishment of the Survey Executed
by A. D. Ferron in 1880.

Beginning at the standard cor. of Tps. 15 S., Rs. 10 and 11 E., which also functions as the closing cor. of Tps. 16 S., Rs. 10 and 11 E., an iron post, 2½ ins. diam., set, mkd. and witnessed as described in the field notes of the concurrent survey of T. 16 S., R. 10 E., Group No. 506, Utah.

S. 89° 59' E., along the Third Standard Parallel South, the S. bdy. of T. 15 S., R. 11 E., Sec. 31.

This file was run for control only, topography omitted.

40.34

The point for the standard ¼ sec. cor. of sec. 31 at proportionate distance. The orig. cor. was located to the SE. and definitely appears to have been moved.

The cor. point was not remonumented since this line was run for control only and the cor. point falls on private property.

80.67

The point for the standard cor. of secs. 31 and 32 at proportionate distance. No evidence of the orig. cor. remains.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground in a collar of stone, with brass cap mkd.

S C
T15S R11E
S31|S32
S5
T16S R11E
1969

Land, rolling.
Soil, clay.
No timber.
Undergrowth, low brush and grass.

S. 89° 59' E., along the S. bdy. of sec. 32.

Over rolling land through low brush and grass.

Dependent Resurvey of the Third Standard
Parallel South Through Range 11 East

CHAINS	
40.34	<p>Point for the standard $\frac{1}{2}$ sec. cor. of sec. 32 at proportionate distance. No evidence remains of the orig. cor.</p>
	<p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.,</p>
	<p style="text-align: center;">S C T15S R11E <u>$\frac{1}{2}$ S32</u> 1969</p>
	<p>The cor. falls in a fence line which bears S. and N. 14 lks.; thence W.</p>
73.40	<p>Trail road, bears N. 50° W. and S. 50° E., irregularly.</p>
80.35	<p>The bottom of a shallow gully, drains S. irregularly.</p>
80.67	<p>The point for the standard cor. of secs. 32 and 33 at proportionate distance. No evidence of the orig. cor. remains.</p>
	<p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.,</p>
	<p style="text-align: center;">S C T15S R11E <u>S32 S33</u> S4 T16S R11E 1969</p>
	<p>Set a 6 ft. steel fence post alongside the cor.</p>
	<p>Land, eroded and gently rolling. Soil, rocky clay. No timber. Undergrowth, scattered low brush and grass.</p>
	<p>S. $89^\circ 59'$ E., along the S. bdy. of sec. 33.</p>
	<p>Over rolling and broken land through low brush and grass.</p>
	<p>Ascend 70 ft. over W. slope through scattered low brush and grass.</p>
15.00	<p>Top of low ridge, bears N. and S., irregularly.</p>
	<p>Continue over rolling and broken land.</p>
20.40	<p>Wash, 20 lks. wide, 4 ft. deep, drains S. 20° E., irregularly.</p>
34.50	<p>Draw, drains S. 10° W.</p>

Dependent Resurvey of the Third Standard
Parallel South Through Range 11 East

CHAINS

- 40.34 The standard $\frac{1}{2}$ sec. cor. of sec. 33 is monumented with a sandstone, 13x10x10 ins., dimly mkd. $\frac{1}{2}$ on the N. face and firmly set in a mound of stone.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground with the orig. stone buried alongside in a collar of stone, with brass cap mkd.,

S C
T15S R11E
 $\frac{1}{2}$ S33
T16S R11E
1969

N. $89^{\circ} 55'$ E., beginning new measurement.

- 14.30 Wash, 30 lks. wide, 6 ft. deep, drains N. 35° W., irregularly.
- 40.23 The point for the standard cor. of secs. 33 and 34 at proportionate distance. No evidence of the orig. cor. remains.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.,

S C
T15S R11E
S33|S34
T16S R11E
1969

Set a 6 ft. steel fence post alongside the cor.

Land, broken and rolling.
Soil, rocky clay.
No timber.
Undergrowth, low brush and grass.

N. $89^{\circ} 55'$ E., along the S. bdy. of sec. 34.

Over rolling and broken land through low brush and grass.

- 2.50 Wash, 15 lks. wide, 3 ft. deep, drains S., irregularly.
- 23.40 Wash, 30 lks. wide, 4 ft. deep, drains S., irregularly.
- 35.23 Wash, 200 lks. wide, 20 ft. deep, drains S.
- 40.23 The standard $\frac{1}{2}$ cor. of sec. 34 is monumented with a sandstone, 12x10x6 ins. (record 14x10x10 ins.), plainly mkd. $\frac{1}{2}$ on the N. face and firmly set.

At the cor. point

Dependent Resurvey of the Third Standard
Parallel South Through Range 11 East

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground with the original stone buried alongside in a collar of stone, with brass cap mkd.,

S C
T15S R11E
 $\frac{1}{2}$ S34
1969

N. $89^{\circ} 52'$ E., beginning new measurement.

10.80 Descend 180 ft. over a ledge which bears N. and S. very irregularly.

18.50 Base of the main descent; over a valley floor which slopes gently to the E.

40.25 The standard cor. of secs. 34 and 35 is monumented with a sandstone, $20 \times 12 \times 7$ ins., badly weathered and dimly mkd., firmly set, located in an old fence line that bears E. and W.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground with the orig. stone buried alongside, with brass cap mkd.,

S C
T15S R11E
S34|S35
S2
T16S R11E
1969

Land, gently rolling.

Soil, clay.

No timber.

Undergrowth, scattered low brush and grass.

N. $89^{\circ} 52'$ E., along the south boundary of sec. 35.

Over land gently sloping to the E. through low brush and grass.

39.75 The point for the standard $\frac{1}{2}$ sec. cor. of sec. 35 at proportionate distance. No evidence of the orig. cor. remains.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 22 ins. in the ground, with brass cap mkd.,

S C
T15S R11E
 $\frac{1}{2}$ S35
T16S R11E
1969

No accessories available.

Dependent Resurvey of the Third Standard
Parallel South Through Range 11 East

CHAINS

79.50 The point for the standard corner of secs. 35 and 36 at proportionate distance. No evidence of the orig. cor. remains.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.,

S C
T15S R11E
S35|S36
S1
T16S R11E
1969

Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, to the N. of the cor.

The cor. is located in an old fence line that bears E. and W.

Land, nearly level.
Soil, clay.
No timber.
Undergrowth, high greasewood.

N. $89^{\circ} 52'$ E., along the S. bdy. of sec. 36.

Over nearly level land through high greasewood.

- 8.60 The Price River, 100 lks. wide, 3 ft. deep, drains S., irregularly. Continue over bottom land.
- 22.90 Ascend 35 ft. over W. slope.
- 29.00 Rim of gently rolling benchland.
- 39.75 The standard $\frac{1}{2}$ sec. cor. of sec. 36 is monumented with a sandstone, 22x12x3 ins. (record 12x10x8 ins.), badly weathered and dimly mkd. $\frac{1}{2}$ on the N. face, firmly set in a mound of stone.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground with the orig. stone buried alongside in a collar of stone, with brass cap mkd.,

S C
T15S R11E
 $\frac{1}{2}$ S36
T16S R11E
1969

S. $87^{\circ} 57'$ E., beginning new measurement.

- 21.70 Wash, 20 lks. wide, 5 ft. deep, drains S. 20° E., irregularly.
- 27.70 Wash, 30 lks. wide, 7 ft. deep, drains S. 30° E., irregularly.

Dependent Resurvey of the Third Standard
Parallel South Through Range 11 East

CHAINS	
34.90	Wash, 40 lks. wide, 9 ft. deep, drains S., irregularly.
39.80	Wash, 100 lks. wide, 11 ft. deep, drains S., irregularly.
42.04	The standard Tp. cor., T. 15 S., R. 11 E., Sec. 36, is monumented with an iron post, 3 ins. diam., 8 ins. remaining above ground, firmly set, with brass cap mkd.,
	<p style="text-align: center;">T15S R11E R12E S31 — S36 S1 S6 1913</p>
	<p>Land, cut with washes draining S., irregularly. Soil, clay. No timber. Undergrowth, scattered low brush and grass.</p>
	<p style="text-align: center;">Dependent Resurvey of the South Boundary of T. 16 S., R. 11 E.</p>
	<p style="text-align: center;">Reestablishment of the Survey Executed by J. T. Breckon in 1892.</p>
	<p style="text-align: center;">—————</p> <p>Beginning from the cor. of Tps. 16 and 17 S., Rs. 10 and 11 E., an iron post, 2½ ins. diam., set, mkd. and witnessed as described in the field notes of the concurrent survey of T. 17 S., R. 10 E., Group No. 506, Utah.</p>
	<p>N. 89° 42' E., bet. secs. 6 and 31</p>
	<p>Over nearly level desert land through high greasewood.</p>
36.92	<p>Point for the ½ sec. cor. of secs. 6 and 31 at proportionate distance. There is no remaining evidence of the orig. cor.</p>
	<p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.,</p>
	<p style="text-align: center;">T16S R11E ½ $\frac{S31}{S6}$ T17S 1969</p>
	<p style="text-align: center;">Set a 6 ft. steel fence post alongside the cor.</p>
76.20	<p>The point for the cor. of secs. 5, 6, 31 and 32, at proportionate distance. There is no remaining evidence of the orig. cor.</p>
	<p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.,</p>

Dependent Resurvey of the South
Boundary of T. 16 S., R. 11 E.

CHAINS

T16S R11E
 $\frac{S31|S32}{S6|S5}$
 T17S
 1969

No accessories available.

Land, nearly level.
 Soil, clay.
 No timber.
 Undergrowth, greasewood.

N. 89° 42' E., bet. secs. 5 and 32.

Over nearly level desert land through greasewood.

39.28 The $\frac{1}{4}$ sec. cor. of secs. 5 and 32 is monumented with a sandstone, 22x8x3 ins. (record 16x14x8 ins.), firmly set and plainly mkd. $\frac{1}{4}$ on the N. face.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground with the orig. stone alongside with brass cap mkd.,

T16S R11E
 $\frac{1}{4} \frac{S32}{S5}$
 T17S
 1969

Set a large stone alongside the cor., 2 ft. above ground.

N. 89° 54' E., beginning new measurement.

Over rolling land through shadscale and salt grass.

6.00 Irrigation canal, drains N. irregularly.

20.80 Point for the E1/16 cor. of secs. 5 and 32.

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.,

T16S R11E
 E1/16 $\frac{S32}{S5}$
 T17S
 1969

No accessories available.

41.60 The cor. of secs. 4, 5, 32 and 33 is monumented with a sandstone, 13x7x4 ins. (record 12x10x6 ins.), firmly set and plainly mkd. with 4 notches on the E. edge and 2 notches on the W. edge.

At the cor. point

77

Dependent Resurvey of the South
Boundary of T. 16 S., R. 11 E.

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground with the orig. stone alongside, with brass cap mkd.,

T16S R11E
S32|S33
S5|S4
T17S
1969

Raise a mound of stone, $2\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, to the N. of the cor.

Land, rolling and broken.
Soil, clay.
No timber.
Undergrowth, shadscale and salt grass.

N. $88^{\circ} 50'$ E., bet. secs. 4 and 33.

Over rolling and broken land.

8.00 Wash, 15 lks. wide, 1ft. deep, drains S. 35° E., irregularly.

19.00 Wash, 50 lks. wide, 2 ft. deep, drains N. 10° W., irregularly.

32.30 Fence, bears N. 20° E. and S. 20° W.

36.90 Wash, 90 lks. wide, 1 ft. deep, drains N. 10° W., irregularly.

40.30 The $\frac{1}{4}$ sec. cor. of secs. 4 and 33 is monumented with a sandstone, 14x8x6 ins., firmly set and plainly mkd. $\frac{1}{4}$ on the N. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 12 ins. in the ground on solid rock with the orig. stone alongside in a mound of stone, 3 ft. base to top, with brass cap mkd.,

T16S R11E
 $\frac{1}{4}$ S33
S4
T17S
1969

S. $88^{\circ} 44'$ E., beginning new measurement.

Over rolling canyon lands through shadscale and salt-grass.

9.00 Trail road, bears N. 70° W. and S. 70° E.

Dependent Resurvey of the South
Boundary of T. 16 S., R. 11 E.

CHAINS

- 11.00 Enter scattered scrub juniper.
- 11.80 Over a series of small spurs and washes that drain NW., irregularly.
- 40.55 The cor. of secs. 3, 4, 33 and 34 is monumented with a sandstone conglomerate, 12x8x8 ins., firmly set and plainly mkd. 3 notches on the E. edge and 3 notches on the W. edge.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground with the orig. stone buried alongside in a collar of stone, with brass cap mkd.,

T16S R11E
S33|S34
 S4|S3
 T17S R11E
 1969

Land, rolling and eroded.
 Soil, rocky clay.
 Timber, scattered scrub juniper.
 Undergrowth, shadscale and saltgrass.

N. 89° 46' E., bet. secs. 3 and 34.

Over rolling land cut with a series of small washes draining to the NW., irregularly.

- 39.86 The point for the ½ sec. cor. of secs. 3 and 34 at proportionate distance. There is no evidence remaining of the orig. cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.,

T16S R11E
 ½ S34
 S3
 T17S R11E
 1969

Raise a mound of stone, 3 ft. base, 2 ft. high to the N. of the cor.

Over rolling and broken land through shadscale, salt grass and scattered scrub juniper.

- 79.72 The point for the cor. of secs. 2, 3, 34 and 35 at proportionate distance. The orig. cor., a sandstone, 15x8x4 ins., plainly mkd. 2 notches on the E. edge and 4 notches on the W. edge was found lying loose on the ground and definitely appears to have been moved. There is no remaining evidence of the orig. cor. position.

Dependent Resurvey of the South
Boundary of T. 16 S., R. 11 E.

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground with the orig. stone buried alongside, with brass cap mkd.,

T16S R11E
S34 S35
S3 S2
T17S R11E
1969

No accessories available.

Land, rolling and broken.

Soil, clay.

Timber, scattered scrub juniper.

Undergrowth, shadscale and salt grass.

N. 89° 46' E., along the S. bdy. of sec. 35.

Over rolling and broken land through scattered scrub juniper.

4.80 Trail road, bears N. 60° E. and S. 60° W., irregularly.

34.10 Trail road, bears N. 75° E. and S. 75° W., irregularly.

39.75 Small draw, drains SE.

40.20 The ½ sec. cor. of secs. 2 and 35 is monumented with a limestone, 14x8x8 ins. (record 16x12x8 ins.), plainly mkd. ½ on the W. face and set in a mound of stone. This corner will now function as the ½ sec. cor. for sec. 35 only.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground on solid rock with the orig. stone buried alongside in a mound of stone 3 ft. base to top, with brass cap mkd.,

T16S R11E
½ S35
T17S
1969

S. 89° 46' E., beginning new measurement.

Over rolling and broken land.

3.20 Top of ridge, bears N. 45° W. and S. 45° E., irregularly.

40.24 The cor. of secs. 35 and 36 is monumented with a sandstone, 12x12x6 ins. (record 18x19x8 ins.), firmly set and plainly mkd. 3 notches on the W. face and 1 notch on the E. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground with the orig. stone alongside in a mound of stone, 3 ft. base to top, with brass cap mkd.,

Dependent Resurvey of the South
Boundary of T. 16 S., R. 11 E.

CHAINS

T16S R11E
S35|S36
T17S R11E
1969

Land, gently rolling.
Soil, rocky clay.
Timber, scattered scrub juniper.
Undergrowth, low brush and grass.

S. 89° 58' E., along the S. bdy. of sec. 36.

Over nearly level land through low brush and grass.

6.00 Wash, drains S.

40.52 The $\frac{1}{2}$ sec. cor. of sec. 36 is monumented with a sandston ,
14x12x4 ins., firmly set and plainly mkd. $\frac{1}{2}$ on the N.
face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins.
in the ground with the orig. stone buried alongside,
with brass cap mkd.,

T16S R11E
 $\frac{1}{2}$ S36
T17S R11E
1969

Raise a mound of stone, $1\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high,
to the N. of the cor.

N. 88° 45' E., beginning new measurement.

11.50 Bottom of a draw, drains N. 35° W., irregularly.

15.10 Bottom of a draw, drains N. 70° W., irregularly; asc.
200 ft. over a broken NW. slope.

30.80 Top of a ridge, bears N. 40° E. and S. 40° W.,
irregularly; desc. 180 ft. over a broken SE. slope.

40.28 The cor. of Tps. 16 and 17 S., Rs. 11 and 12 E., which
is monumented with a sandstone, 28x10x8 ins. (record
20x16x10 ins.), plainly mkd. with 6 notches on four
sides and firmly set in a mound of stone.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 8 ins.
in the ground on solid rock with the orig. stone along-
side in a mound of stone, $3\frac{1}{2}$ ft. base to top, with brass
cap mkd.,

T16S
R11E R12E
S36|S31
S1|S6
T17S
1969

Dependent Resurvey of the East
Boundary of T. 16 S., R. 11 E.

CHAINS

From the cor. of Tps. 16 and 17 S., Rs. 11 and 12 E.

N. 3° 20' E., bet. secs. 31 and 36.

Asc. 250 ft. over a broken SE. slope.

24.50 Top of a narrow ridge, bears N. 20° E. and S. 20° W., irregularly.

25.00 Desc. 310 ft. over a broken NW. slope.

40.20 The $\frac{1}{2}$ sec. cor. of secs. 31 and 36 is monumented with a conglomerate stone, 18x12x7 ins., plainly mkd. $\frac{1}{2}$ on the W. face, firmly set, with a mound of stone to the W.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 6 ins. in the ground on solid rock with the orig. stone alongside in a mound of stone, 4 ft. base to top, with brass cap mkd.,

T16S
R11E R12E
 $\frac{1}{2}$
S36|S31
1969

N. 0° 40' W., beginning new measurement.

6.90 Bottom of a gulch, drains N. 80° E., irregularly.

39.76 The cor. of secs. 25, 30, 31 and 26 is monumented with a conglomerate stone, 18x12x10 ins., dimly mkd. and firmly set in a mound of stone.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 5 ins. in the ground on solid rock with the orig. stone alongside in a mound of stone, 4 ft. base to top, with brass cap mkd.,

T16S
R11E R12E
S25|S30
S36|S31
1969

Land, broken.
Soil, rocky clay.
Timber, scattered scrub juniper.
Undergrowth, low brush and grass.

N. 0° 22' E., bet. secs. 25 and 30.

Over canyon bottom, rocky and broken, through scattered juniper.

1.30 Gully, drains E.

19.00 Gully, drains SE.

Dependent Resurvey of the East
Boundary of T. 16 S., R. 11 E.

CHAINS

- 30.90 North rim of canyon.
- 39.89 The $\frac{1}{2}$ sec. cor. of secs. 25 and 30 is monumented with a sandstone, 16x10x3 ins. (record 20x12x4 ins.), plainly mkd. $\frac{1}{2}$ on the W. face and firmly set with a mound of stone to the W.
- At the cor. point
- Set an iron post, 20 ins. long, 2 $\frac{1}{2}$ ins. diam., 18 ins. in the ground with the orig. cor. buried alongside in a mound of stone, 3 ft. base to top, with brass cap mkd.,
- T16S
R11E R12E
 $\frac{1}{2}$
S25|S30
1969
-
- N. 0° 15' W., beginning new measurement.
- 11.70 Enter grassy flat.
- 32.20 Trail road, bears N. 30° E. and S. 30° W., irregularly.
- 40.30 The cor. of secs. 19, 24, 25 and 30 is monumented with an iron post, 2 ins. diam., 18 ins. above ground in a mound of stone, 3 $\frac{1}{2}$ ft. base to top, with brass cap mkd.,
- T16S
R11E R12E
S24|S19
S25|S30
1913
- Land, nearly level.
Soil, clay.
No timber.
Undergrowth, grass.
- N. 1° 56' W., bet. secs. 19 and 24.
- Over nearly level land through grass.
- 2.00 Leave grassy flat; continue over broken land through scattered juniper.
- 26.90 South rim of canyon, the canyon bears N. 80° E. and S. 80° W., irregularly; desc. 215 ft. over broken N. slope.
- 40.04 The $\frac{1}{2}$ sec. cor. of secs. 19 and 24 is monumented with a badly weathered sandstone, 12x9x3 ins. (record 16x14x3 ins.), firmly set in a mound of stone, no marks visible.

CHAINS

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground on solid rock with the orig. stone alongside in a mound of stone, 4 ft. base to top, with brass cap mkd.,

T16S
R11E R12E
½
S24|S19
1969

N. 0° 53' E., beginning new measurement.

28.30 Price River, 120 lks. wide, 4 ft. deep, drains SE., irregularly; asc. 75 ft. from the N. side of the river over S. slope.

34.50 Spur, projects SW.

37.00 Draw, drains SW.

39.00 Small spur, projects SW.

40.14 The cor. of secs. 13, 18, 19 and 24 is monumented with a sandstone, 14x7x5 ins., plainly mkd. with 3 notches on the N. and 3 notches on the S., firmly set and with a mound of stone to the W.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 16 ins. in the ground on solid rock with the orig. stone alongside in a mound of stone, 3 ft. base to top, with brass cap mkd.,

T16S
R11E R12E
S13|S18
S24|S19
1969

Land, broken.
Soil, rocky clay.
Timber, scattered juniper.
Undergrowth, low brush and grass.

N. 1° 24' E., bet. secs. 13 and 18.

Asc. 150 ft. over a steep, rocky S. slope through scattered scrub juniper.

22.90 N. rim of canyon, bears E. and W., irregularly; continue over broken land through scattered juniper.

39.74 The ½ sec. cor. of secs. 13 and 18 is monumented with a sandstone, 14x12x9 ins., plainly mkd. ½ on the W. face and firmly set.

At the cor. point

Dependent Resurvey of the East
Boundary of T. 16 S., R. 11 E.

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 22 ins. in the ground with the orig. stone buried alongside, with brass cap mkd.,

T16S
R11E R12E
 $\frac{1}{4}$
S13|S18
1969

The cor. is located on the NW. slope of a low ridge that bears N. and W., irregularly, 30 lks. below the top.

N. $0^{\circ} 20'$ W., beginning new measurement.

Over rolling and broken land through scattered juniper.

40.01 The cor. of secs. 7, 12, 13 and 18 is monumented with a sandstone, 14x12x6 ins. (record 18x16x10 ins.), plainly mkd. 2 notches on the N. face and 4 notches on the S. face, with a mound of stone to the W.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins. in the ground on solid rock with the orig. stone buried alongside in a collar of stone, with brass cap mkd.,

T16S
R11E R12E
S12|S7
S13|S18
1969

Land, rolling and broken.
Soil, rocky clay.
No timber.
Undergrowth, low brush and grass.

N. $0^{\circ} 19'$ W., bet. secs. 7 and 12.

Over rolling and broken land through low brush and grass.

39.78 The $\frac{1}{4}$ sec. cor. of secs. 7 and 12 is monumented with a sandstone, 27x6x4 ins. (record 20x10x4 ins.), plainly mkd. $\frac{1}{4}$ on the W. face and firmly set.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 16 ins. in the ground with the orig. stone buried alongside in a collar of stone, with brass cap mkd.,

Dependent Resurvey of the East
Boundary of T. 16 S., R. 11 E.

CHAINS

T16S
R11E R12E
 $\frac{1}{2}$
S12|S7
1969

The cor. is located on a low ledge sloping to the N.

N. 0° 16' W., beginning new measurement.

- 1.00 The Price River, 130 lks. wide, 3 ft. deep, drains W. from NE.
- 2.30 Enter dense, high brush and scattered cottonwood trees over nearly level bottom land.
- 11.00 Price, River, 100 lks. wide, 3 ft. deep, drains S. 80° E.
- 17.20 Graded dirt road, bears N. 35° E. and S. 35° W.
- 22.50 Price, River, 120 lks. wide, 3 ft. deep, drains SW.
- 31.70 Price River, 120 lks. wide, 3 ft. deep, drains SE.
- 33.40 Asc. 70 ft. over S. slope.
- 36.00 Top of ledge, bears E. and W., irregularly.
- 40.41 The cor. of secs. 1, 6, 7 and 12 is monumented with a sandstone, 18x8x6 ins. (record 20x12x8 ins.), plainly mkd. 1 notch on the N. face and 5 notches on the S. face, firmly set and with a mound of stone to the W.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground with the orig. stone buried alongside, with brass cap mkd.

T16S
R11E R12E
S1|S6
S12|S7
1969

Raise a mound of stone, 2 ft. base, 1½ ft. high, to the W. of the cor.

Land, broken.
Soil, rocky clay.
No timber.
Undergrowth, low brush and grass.

N. 0° 21' W., bet. secs. 1 and 6.

Over rocky, broken land through low brush and grass.

Dependent Resurvey of the East
Boundary of T. 16 S., R. 11 E.

CHAINS

- 39.46 The $\frac{1}{2}$ sec. cor. of secs. 1 and 6 is monumented with a sandstone, 12x10x5 ins. (record 16x10x8 ins.), dimly mkd. $\frac{1}{2}$ on the W. face, firmly set and with a mound of stone to the W. of the cor.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground with the orig. stone buried alongside, with brass cap mkd.,

T16S
R11E R12E
 $\frac{1}{2}$
S1|S6
1969

Raise a mound of stone, 2 ft. base, 1 ft. high to the W. of the cor.

N. $1^{\circ} 14'$ W., beginning new measurement.

Over gently rolling land through low brush and grass.

- 9.00 Desc. 50 ft. over a N. slope.
- 16.50 End descent.
- 19.50 Wash, 100 lks. wide, 12 ft. deep, drains N. 80° W., irregularly.
- 38.75 Intersect the Third Standard Parallel South, the S. bdy. of sec. 36, T. 15 S., R. 11 E., the point for the closing cor. of Tps. 16 S., Rs. 11 and 12 E., at proportionate distance longitudinally; there is no remaining evidence of the orig. cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T15S R11E
S36
S1|S6
C C
T16S
R11E R12E

The closing corner is located on the W. side of a wash, 80 lks. wide, 7 ft. deep, drains S. 10° W., irregularly.

From the closing cor., the standard Tp. cor. of T. 15 S., R. 11 E., sec. 36, bears S. $87^{\circ} 57'$ E., 2.83 chs.

Land, gently rolling and eroded.

Soil, clay.

No timber.

Undergrowth, scattered low brush.

Dependent Resurvey of a Portion of
the Subdivision of T. 16 S., R. 11 E.

Dependent Resurvey of the East
Boundary of T. 16 S., R. 11 E.

CHAINS

Reestablishment of the Survey Executed
by J. T. Breckon in 1895.

Beginning at the cor. of secs. 35 and 36 on the S. bdy.
of the township.

N. 0° 16' E., bet. secs. 35 and 36.

Asc. 130 ft. over broken S. slope through scattered
scrub juniper.

17.00 Top of rocky point; desc. 70 ft. over broken N. slope.

19.50 Gully, drains S. 20° E., irregularly.

24.00 Jeep road, bears NW. and SE.

40.46 The $\frac{1}{2}$ sec. cor. of secs. 35 and 36 is monumented with a
sandstone, 10x8x8 ins. (record 14x10x8 ins.), firmly
set and plainly mkd. $\frac{1}{2}$ on the W. face.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 11 ins.
in the ground on solid rock with the orig. stone along-
side in a mound of stone, 3 ft. base to top, with brass
cap mkd.,

T16S R11E

$\frac{1}{2}$

S35|S36

1969

N. 0° 10' W., beginning new measurement.

Asc. 75 ft. over S. slope.

10.50 Top of ridge, bears E. and W., irregularly. Over
gentle N. slope through dense juniper.

40.44 The cor. of secs. 25, 26, 35 and 36 is monumented with
a sandstone, 14x9x9 ins., firmly set and plainly mkd.
with 1 notch on the S. and 1 notch on the E.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 20 ins.
in the ground with the orig. stone buried alongside in
a collar of stone, with brass cap mkd.,

T16S R11E

S26|S25

S35|S36

1969

Land, rolling.

Soil, rocky clay.

Timber, scattered scrub, juniper and pinon.

Undergrowth, scattered low brush and grass.

Beginning at the cor. of secs. 25, 30, 31 and 36 on the
E. bdy. of the township.

Dependent Resurvey of a Portion of
the Subdivision of T. 16 S., R. 11 E.

CHAINS

- S. 89° 36' W., bet. secs. 25 and 36.
Over rolling and broken land through scattered juniper.
- 3.00 Wash, drains N.; asc. 230 ft. over steep, rocky E. slope.
- 14.00 Same wash, drains S. 80° E.
- 17.30 Top of rocky rim, bears N. 10° E. and S. 10° W., very irregularly, over broken bench land.
- 38.00 Jeep road, bears N. 30° E. and S. 30° W.
- 41.44 The $\frac{1}{2}$ sec. cor. of secs. 25 and 36 is monumented with a conglomerate stone, 14x10x6 ins. (record 18x18x4 ins.), firmly set, dimly mkd. $\frac{1}{2}$ on the W. face and with a mound of stone to the N.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground with the orig. cor. buried alongside, with brass cap mkd.,

T16S R11E

$\frac{1}{2}$ $\frac{S25}{S36}$

1969

Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, to the N.

-
- N. 89° 28' W., beginning new measurement.
- 41.12 The cor. of secs. 25, 26, 35 and 36.
Land, rolling and broken.
Soil, rocky clay.
Timber, scattered scrub juniper and pinon.
Undergrowth, low brush and grass.

-
- N. 0° 25' E., bet. secs. 25 and 26.
Over gently rolling land through scattered scrub juniper.
- 11.60 Top of ridge; desc. 115 ft. on NW. slope.
- 22.60 Draw, drains N. 50° W., irregularly; asc. 70 ft. over a SW. slope through scattered scrub juniper.
- 31.20 Top of ridge, bears N. 80° W. and S. 80° E., irregularly; desc. 100 ft. over NE. slope.
- 40.36 The $\frac{1}{2}$ sec. cor. of secs. 25 and 26 is monumented with a sandstone, 18x12x6 ins., plainly mkd. $\frac{1}{2}$ on the W. face and firmly set.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground with the orig. stone buried alongside, with brass cap mkd.,

Dependent Resurvey of a Portion of
the Subdivision of T. 16 S., R. 11 E.

CHAINS

T16S R11E

 $\frac{1}{2}$

S26 | S25

1969

Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high,
to the W. of the cor.

N. $0^{\circ} 20'$ W., beginning new measurement.

- 2.00 Draw, drains NW.; thence over a series of small spurs,
projecting W.
- 13.10 Bottom of draw, drains N. 80° W.; asc. over broken SW.
slope.
- 22.50 Top of ridge, bears E. and W. irregularly, over broken
land.
- 40.02 The cor. of secs. 23, 24, 25 and 26 is monumented with
a sandstone, 12x7x5 ins. (record 16x12x8 ins.), plainly
mkd. 2 notches on the S. and 1 notch on the E., and
firmly set.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins.
in the ground with the orig. stone alongside in a mound
of stone, $3\frac{1}{2}$ ft. base to the top, with brass cap mkd.,

T16S R11E

S23 | S24

S26 | S25

1969

Land, broken.
Soil, rocky clay.
Timber, scattered scrub juniper.
Undergrowth, low brush and grass.

Beginning at the cor. of secs. 19, 24, 25 and 30 on the
E. bdy. of the Tp.

N. $89^{\circ} 51'$ W., bet. secs. 24 and 25.

Over broken land through dense scrub juniper and pinon.

- 41.29 Point for the $\frac{1}{2}$ sec. cor. of secs. 24 and 25 at propor-
tionate distance. No evidence of the orig. cor. remains.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins.
in the ground in a collar of stone, with brass cap mkd.,

T16S R11E

 $\frac{1}{2}$ S24

S25

1969

The cor. is located in the bottom of a draw, 350
lks. wide, 70 ft. deep, drains N. 30° W., 2.00
chs.; thence N.

Dependent Resurvey of a Portion of
the Subdivision of T. 16 S., R. 11 E.

CHAINS	
61.00	Jeep road, bears N. and S.
82.58	The cor. of secs. 23, 24, 25 and 26. Land, broken. Soil, rocky clay. Timber, scattered scrub juniper. Undergrowth, low brush and grass.
<p>Reestablishment of the Resurvey Executed by J. T. Breckon in 1897.</p> <hr style="width: 20%; margin: auto;"/> <p>N. 0° 21' E., bet. secs. 23 and 24.</p> <p>Over broken land through scattered scrub junipers, low brush and grass.</p>	
5.90	Enter nearly level land through dense junipers.
29.60	S. rim of a canyon, bears N. 45° E. and S. 45° W., irregularly; desc. 105 ft. on broken NW. slope through scattered scrub juniper.
39.91	Point selected for the witness $\frac{1}{2}$ sec. cor. of secs. 23 and 24. Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 12 ins. in the ground on solid rock beside a conglomerate boulder 5x4x3 ft., in a mound of stone, 4 ft. base to top, with brass cap mkd.,
	<p>T16S R11E W C $\frac{1}{2}$ S23↑S24 1969</p>
	The witness corner is located on a steep W. slope.
39.97	The true point for the $\frac{1}{2}$ sec. cor. at proportionate distance, is located on the sloping side of the above mentioned boulder which cannot be perpetuated. Due to the crumbly texture of the boulder, the marking of an "X" on the true cor. point was not practical. No evidence of the orig. cor. could be found. Desc. 70 ft. over broken NW. slope.
51.50	Creek, 15 lks. wide, 2 ft. deep, drains E., irregularly; asc. 225 ft. over SE. slope.
58.40	Top of spur, projects S. 70° W.; desc. 100 ft. over NW. slope.
68.10	End descent, over broken land, scattered scrub junipers.
79.94	Point for the cor. of secs. 13, 14, 23 and 24 at proportionate distance. There is no remaining evidence of the orig. cor.

Dependent Resurvey of a Portion of
the Subdivision of T. 16 S., R. 11 E.

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.,

T16S R11E

S14 | S13
S23 | S24

1969

Raise a mound of stone, 3 ft. base, 1½ ft. high, to the W. of the cor.

The cor. is located in the bottom of a gully that drains N. 30° E., irregularly.

Land, broken and cut with gullies.
Soil, rocky clay.
Timber, scattered scrub juniper.
Undergrowth, scattered low brush and grass.

Beginning at the cor. of secs. 13, 18, 19 and 24 on the E. bdy. of the township.

S. 89° 55' W., bet. secs. 13 and 24.

Over rocky and broken land through low brush and grass.

37.30 Desc. 60 ft. over W. slope.

40.10 End descent, continue over nearly level bottom land through high greasewood and scattered cottonwood trees.

40.67 Point for the ½ sec. cor. of secs. 13 and 24 at proportionate distance. No evidence of the orig. cor. remains.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.,

T16S R11E

½ S13
S24

1969

Raise a mound of stone, 3 ft. base, 1 ft. high to the N. of the cor.

51.10 Price River, 60 lks. wide, 1 ft. deep, drains S. 10° E., irregularly.

60.30 Asc. 50 ft. over NE. slope.

71.50 Top of slope.

81.34 The cor. of secs. 13, 14, 23 and 24.

Land, rolling and broken.
Soil, rocky clay.
No timber.
Undergrowth, low brush and grass.

Dependent Resurvey of a Portion of
the Subdivision of T. 16 S., R. 11 E.

CHAINS

N. 1° 43' W., bet. secs. 13 and 14.

Over broken land through low brush and grass.

11.20 Asc. 75 ft. over SE. slope.

18.50 N. rim of canyon, bears N. 40° E. and S. 40° W., irregularly; continue over a series of spurs projecting to the E.

39.99 The $\frac{1}{4}$ sec. cor. of secs. 13 and 14 is monumented with a sandstone, 17x11x4 ins. (record 20x12x3 ins.), plainly mkd. $\frac{1}{2}$ on the W. face and firmly set in a mound of stone.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 12 ins. in the ground with the orig. rock alongside and in a mound of stone, $3\frac{1}{2}$ ft. base to top, with brass cap mkd.,

T16S R11E

$\frac{1}{4}$
S14|S13

1969

N. 0° 10' W., beginning new measurement.

Over a series of spurs projecting to the E., irregularly.

40.00 The cor. of secs. 11, 12, 13 and 14, is monumented with a limestone, 16x8x5 ins., plainly mkd. with 4 notches on the S. and 1 notch on the E., firmly set in a mound of stone.

At the cor. point

Set an iron post, 24 ins. in the ground with the orig. stone buried alongside, with brass cap mkd.,

T16S R11E

S11|S12
S14|S13

1969

Raise a mound of stone, $1\frac{1}{2}$ ft. base by 1 ft. high, to the W.

Beginning at the cor. of secs. 7, 12, 13 and 18 on the E. bdy. of the township.

N. 89° 55' W., bet. secs. 12 and 13.

By triangulation, from the cor. over broken canyon land.

Dependent Resurvey of a Portion of
the Subdivision of T. 16 S., R. 11 E.

CHAINS	
37.50	Price, River, 80 lks. wide, 2 ft. deep, drains S. 30° E., irregularly.
41.66	<p>Point for the $\frac{1}{2}$ sec. cor. of secs. 12 and 13 at proportionate distance. No evidence of the orig. cor. remains.</p> <p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 14 ins. in the ground on solid rock in a mound of stone, 3 ft. base to top, with brass cap mkd.,</p> <p style="text-align: center;">T16S R11E $\frac{1}{2}$ $\frac{S12}{S13}$ 1969</p> <p>The cor. is located 90 lks. below a ledge that bears N. 15° W. and S. 15° E., irregularly.</p>
43.32	End triangulation, over rocky, broken land through low brush and grass.
83.32	<p>The cor. of secs. 11, 12, 13 and 14.</p> <p>Land, rolling and broken. Soil, rocky clay. No timber. Undergrowth, low brush and grass.</p>
39.51	<p>N. 0° 06' E., bet. secs. 11 and 12.</p> <p>Over rocky, broken land through low brush and grass.</p> <p>The $\frac{1}{2}$ sec. cor. of secs. 11 and 12 is monumented with a sandstone, 24x9x7 ins. (record 16x12x8 ins.), firmly set and plainly mkd. $\frac{1}{4}$ on the W. face.</p> <p>At the cor. point</p> <p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground with the orig. stone buried alongside, with brass cap mkd.,</p> <p style="text-align: center;">T16S R11E $\frac{1}{4}$ S11 S12 1969</p> <p>Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, to the W.</p> <p>The cor. is located on the N. side of the bottom of a draw that drains E., irregularly.</p>
5.10	<p>N. 0° 05' E., beginning new measurement.</p> <p>Asc. 50 ft. from the above mentioned draw.</p> <p>N. rim of the draw; continue over broken land.</p>

Dependent Resurvey of a Portion of
the Subdivision of T. 16 S., R. 11 E.

CHAINS

- 16.55 Center line of a graded dirt road, bears N. 80° E. and S. 80° W. for 50 lks.; thence S. 60° W., irregularly.
- 40.40 The cor. of secs. 1, 2, 11 and 12, is monumented with a sandstone, 22x12x7 ins. (record 20x16x10 ins.), firmly set and plainly mkd. with 5 notches on the S. and 1 notch on the E.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground on solid rock with the orig. stone buried along side and in a mound of stone, 4 ft. base to top, with brass cap mkd.,

T16S R11E

S2|S1
S11|S12

1969

Land, rolling and broken.
Soil, rocky clay.
No timber.
Undergrowth, low brush and grass.

Beginning at the cor. of secs. 1, 6, 7 and 12 on the E. bdy. of the township.

S. 89° 55' W., bet. secs. 1 and 12.

By triangulation, from the cor. over broken canyon land.

- 35.00 Price River, 90 lks. wide, 1 ft. deep, drains S. 30° E., irregularly.
- 41.44 Point for the ¼ sec. cor. of secs. 1 and 12 at proportionate distance. No evidence of the orig. cor. remains.
- Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.,
- T16S R11E
- ¼ S1
S12
- 1969
- Set a cottonwood post, 4 ins. diam., 6 ft. above ground alongside the cor.
- Over river bottom land through high brush and scattered cottonwood trees.
- 53.20 Asc. 90 ft. over E. slope.
- 59.10 Top of ascent, over rolling and broken land.
- 62.16 Point for the W1/16 cor. of secs. 1 and 12.

Dependent Resurvey of a Portion of
the Subdivision of T. 16 S., R. 11 E.

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.,

T16S R11E
W1/16—S1
S12
1969

Raise a mound of stone, 2 ft. base, 1½ ft. high, to the N. of the cor.

The cor. is located on the NW. slope of a spur projecting NE., 40 lks. below the crest.

82.88 The cor. of secs. 1, 2, 11 and 12.

Land, rolling and broken.
Soil, rocky clay.
No timber.
Undergrowth, low brush and grass.

N. 0° 07' E., bet. secs. 1 and 2.

Over rolling and broken land through low brush and grass.

2.10 Rocky wash, 20 lks. wide, 5 ft. deep, drains N. 40° E.

25.10 Bottom of gully, drains E., irregularly.

36.80 Trail road, bears E. and W., irregularly.

40.19 The ½ sec. cor. of secs. 1 and 2 is monumented with a limestone, 16x12x10 ins., firmly set and plainly mkd. ½ on the W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground with the orig. stone buried alongside, with brass cap mkd.,

T16S R11E
½
S2|S1
1969

Raise a mound of stone, 1½ ft. base, 1 ft. high, to the W. of the cor.

N. 0° 48' W., beginning new measurement.

11.90 Wash, 40 lks. wide, 5 ft. deep, drains N. 80° E., irregularly.

37.60 Top of low rise; desc. 10 feet.

38.40 Base of descent.

Dependent Resurvey of a Portion of
the Subdivision of T. 16 S., R. 11 E.

CHAINS

39.49 Intersect the Third Standard Parallel South, S. bdy. of sec. 35, T. 15 S., R. 11 E. Point for the closing cor. of secs. 1 and 2, T. 16 S., R. 11 E., at proportionate distance, longitudinally. There is no remaining evidence of the orig. cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T15S R11E
 $\frac{S35}{S2|S1}$
 C C
 T16S R11E
 1969

Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, to the S.

The standard cor. of secs. 35 and 36, T. 15 S., R. 11 E., a $2\frac{1}{2}$ inch I.P., set, mkd. and witnessed as previously described, bears N. $89^{\circ} 52' E.$, 3.22 chs.

Land, nearly level.
 Soil, clay.
 No timber.
 Undergrowth, high greasewood.

The point for the $\frac{1}{2}$ sec. cor. of sec. 1 on the N. bdy. of the township, at midpoint bet. the closing cor. of secs. 1 and 2 and the closing Tp. cor. of Tps. 16 S., Rs. 11 and 12 E.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

$\frac{T15S R11E}{\frac{1}{2} S1}$
 T16S R11E
 1969

Set a 6 ft. steel fence post alongside the cor.

The standard $\frac{1}{2}$ sec. cor. of sec. 36, T. 15 S., R. 11 E., a $2\frac{1}{2}$ inch iron post, set, mkd. and witnessed as previously described in this record, bears N. $89^{\circ} 52' E.$, 1.89 chs.

The point for the W1/16 cor. of sec. 1 on the N. bdy. of the township at midpoint bet. the closing cor. of secs. 1 and 2 and the N. $\frac{1}{2}$ sec. cor. of sec. 1.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground, with brass cap mkd.

$\frac{T15S R11E}{W1/16 S1}$
 T16S R11E
 1969

Set a 6 ft. steel fence post alongside the cor.

Dependent Resurvey of a Portion of
the Subdivision of T. 16 S., R. 11 E.

CHAINS

The cor. is located on river bottom land which is covered with dense high willows.

Reestablishment of the Survey Executed by
J. T. Breckon in 1895.

Beginning at the cor. of secs. 2, 3, 34 and 35 on the
S. bdy. of the township.

N. 0° 08' W., bet. secs. 34 and 35.

Over rolling and broken land through scattered scrub
junipers.

40.45

The $\frac{1}{4}$ sec. cor. of secs. 34 and 35 is monumented with a
sandstone, 14x10x6 ins., firmly set, plainly mkd. $\frac{1}{2}$ on
the W. face and with a small mound of stone to the W.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins.
in the ground on solid rock with the orig. stone buried
alongside and in a mound of stone, 4 ft. base to top,
with brass cap mkd.,

T16S R11E

$\frac{1}{4}$

S34|S35

1969

The east edge of a ravine, 90 ft. deep, drains W.,
irregularly, bears N. 20 lks. from the cor.

N. 0° 41' E., beginning new measurement.

Over broken land through dense pinon and juniper.

24.00

Jeep road, bears N. 30° W. and S. 30° E.

29.00

Jeep road, bears NW. and SE.

40.14

Point for the cor. of secs. 26, 27, 34 and 35 at pro-
portionate distance. No evidence of the orig. cor.
remains.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 12 ins.
in the ground on solid rock in a mound of stone, 4 ft.
base to top, with brass cap mkd.

T16S R11E

S27|S26

S34|S35

1969

The cor. is located on a spur projecting to the S.

The brink of a ledge that bears N. 20° W. and S. 20° E.,
irregularly, bears W. 1.00 ch. from the cor.

Dependent Resurvey of a Portion of
the Subdivision of T. 16 S., R. 11 E.

CHAINS

Land, broken.
Soil, rocky clay.
Timber, dense scrub pinon and juniper.
Undergrowth, scattered low brush and grass.

Beginning at the cor. of secs. 25, 26, 35 and 36.

S. 89° 52' W., bet. secs. 26 and 35.

Over broken land through scattered scrub juniper.

40.06 Point for the $\frac{1}{2}$ sec. cor. of secs. 26 and 35 at proportionate distance. No evidence of the orig. cor. remains.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 15 ins. in the ground on solid rock in a mound of stone, 3 ft. base to top, with brass cap mkd.,

T16S R11E

$\frac{1}{2}$ $\frac{S26}{S35}$

1969

Over land gently sloping to the W. through dense scrub pinon and juniper.

63.00 Desc. 80 ft. over W. slope.

70.90 Base of descent, over broken land.

73.00 Bottom of a draw, drains NW.

75.30 Asc. 65 ft. over E. slope.

79.50 Top of ascent; continue over broken land.

80.12 The cor. of secs. 26, 27, 34 and 35.

Land, broken.
Soil, rocky clay.
Timber, scattered scrub pinon and juniper.
Undergrowth, low brush and grass.

N. 0° 12' W., bet. secs. 26 and 27.

Over broken land through scattered scrub juniper.

17.50 Enter rolling land.

26.70 Gully, drains N. 40° W., irregularly.

40.14 Point for the $\frac{1}{2}$ sec. cor. of secs. 26 and 27 at proportionate distance. There is no remaining evidence of the orig. cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 14 ins. in the ground on solid rock in a mound of stone, 3 ft. base to top, with brass cap mkd.,

Dependent Resurvey of a Portion of
the Subdivision of T. 16 S., R. 11 E.

CHAINS

T16S R11E

 $\frac{1}{2}$
S27|S26

1969

The cor. is located at the base of a N. slope on
the S. edge of a grassy flat.

- 50.50 Creek, 20 lks. wide, $1\frac{1}{2}$ ft. deep, drains E.
- 66.00 Asc. 100 ft. over a SE. slope.
- 71.50 End ascent; continue over rolling and broken land thru
low brush and grass.
- 77.00 Desc. 40 ft. over a NW. slope.
- 80.28 The cor. of secs. 22, 23, 26 and 27 is monumented with
a limestone, 16x10x10 ins., firmly set, badly weathered,
dimly mkd. and with a mound of stone to the W.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins.
in the ground with the orig. stone buried alongside and
in a collar of stone, with brass cap mkd.,

T16S R11E

 $\frac{1}{2}$
S22|S23
S27|S26

1969

The cor. is located in the bottom of a draw that
drains NE. irregularly.

Land, rolling and broken.
Soil, rocky clay.
No timber.
Undergrowth, low brush and grass.

Beginning at the cor. of secs. 23, 24, 25 and 26.

S. $89^{\circ} 51'$ W., bet. secs. 23 and 26.

Over broken land through scattered scrub juniper.

- 28.50 Draw, drains N.; asc. 120 ft. over a broken E. slope.

- 40.22 Point for the $\frac{1}{4}$ sec. cor. of secs. 23 and 26 at propor-
tionate distance. No evidence of the orig. cor. remains.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins.
in the ground on solid rock in a mound of stone, 4 ft.
base to top, with brass cap mkd.

T16S R11E

 $\frac{1}{4}$
S23
S26

1969

- 57.40 Creek, 40 lks. wide, $1\frac{1}{2}$ ft. deep, drains N. 40° E.,
irregularly.

Dependent Resurvey of a Portion of
the Subdivision of T. 16 S., R. 11 E.

CHAINS

- 69.00 Asc. 85 ft. over SE. slope.
 - 76.90 Top of ledge, bears N. 15° E. and S. 15° W., irregularly
 - 80.44 The cor. of secs. 22, 23, 26 and 27.
- Land, broken.
Soil, rocky clay.
No timber.
Undergrowth, low brush and grass.

Reestablishment of the Resurvey Executed
by J. T. Breckon in 1897.

N. 0° 07' W., bet. secs. 22 and 23.

Over rolling and broken land through low brush and grass.

- 7.00 Draw, drains N. 10° W.
- 13.60 Bottom of gully, drains S. 80° E., irregularly.
- 40.18 The ¼ sec. cor. of secs. 22 and 23 is monumented with a slate stone, 18x10x3 ins., firmly set in a mound of stone, dimly mkd. ¼ on the W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground with the orig. stone buried alongside.

T16S R11E
¼
S22|S23
1969

Raise a mound of stone, 3 ft. base, 1 ft. high, to the W.

N. 0° 12' W., beginning new measurement.

- 20.075 Point for the N1/16 cor. secs. 22 and 23.
- Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground on solid rock in a mound of stone, 4 ft. base to top, with brass cap mkd.

T16S R11E
N1/16
S22|S23
1969

The cor. is located on the N. side of a gully that drains N. 80° E., irregularly.

Dependent Resurvey of a Portion of
the Subdivision of T. 16 S., R. 11 E.

CHAINS

40.15

The cor. of secs. 14, 15, 22 and 23 is monumented with a sandstone, 16x10x8 ins., badly weathered; no marks visible, firmly set in a mound of stone. This position is harmoniously related to existing found corners and is accepted as the best evidence of the orig. cor. position.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground with the orig. stone buried alongside, with brass cap mkd.,

T16S R11E

S15|S14
S22|S23

1969

Raise a mound of stone, 2 ft. base, 1½ ft. high, to the W.

Land, rolling and broken.

Soil, rocky clay.

No timber.

Undergrowth, low brush and grass.

Beginning at the cor. of secs. 13, 14, 23 and 24.

N. 89° 51' W., bet. secs. 14 and 23.

Over broken land through low brush and grass.

14.10

Creek, 25 lks. wide, 1 ft. deep, drains S. 20° E., irregularly.

20.285

Point for the E1/16 cor. of secs. 14 and 23.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.,

T16S R11E

E1/16—S14
S23

1969

Raise a mound of stone, 2 ft. base, 1½ ft. high, to the N.

34.00

Wash, drains N. 10° E.

39.00

Wash, drains N.

40.57

Point for the ¼ sec. cor. of secs. 14 and 23 at proportionate distance. No evidence of the orig. cor. remains.

Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground on solid rock in a mound of stone, 3 ft. base to top, with brass cap mkd.,

T16S R11E

¼ — S14
S23

1969

Dependent Resurvey of a Portion of
the Subdivision of T. 16 S., R. 11 E.

CHAINS

The cor. is located on the NE. slope of a spur
projecting N.

- 62.00 Wash, drains N. 20° W.
- 71.50 Recross same wash, drains SE.
- 76.50 Recross same wash, drains NE.
- 80.00 Recross same wash, drains S. 10° E.
- 81.14 The cor. of secs. 14, 15, 22 and 23.
- Land, broken.
Soil, rocky clay.
No timber.
Undergrowth, low brush and grass.
- N. 0° 35' W., bet. secs. 14 and 15.
- Desc. 22 ft. over NE. slope through low brush and grass.
- 3.10 Creek, 15 lks. wide, 2 ft. deep, drains S. 20° E.,
irregularly; continue over nearly level land.
- 13.58 Asc. 25 ft. on gradual S. slope.
- 17.57 Top of S. slope; continue over nearly level land.
- 34.90 Desc. 35 ft. over N. slope to cor. position.
- 39.68 The $\frac{1}{4}$ sec. cor. of secs. 14 and 15 is monumented with a
sandstone, 12x12x10 ins. (record 12x10x6 ins.), firmly
set and plainly mkd. $\frac{1}{4}$ on the W. face.
- At the cor. point
- Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 12 ins.
in the ground on solid rock with the orig. stone along-
side and in a mound of stone, 3 ft. base to top, with
brass cap mkd.,
- T16S R11E
 $\frac{1}{4}$
S15|S14
1969
-
- N. 0° 08' W., beginning new measurement.
- 2.00 Draw, drains N. 70° E.; asc. 25 ft. over SE. slope.
- 6.80 Spur, projects N. 50° E., irregularly, over rolling
land.
- 14.85 Fence, bears N. 40° W. and S. 40° E.
- 20.03 Point for the N1/16 cor of secs. 14 and 15.
- Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins.
in the ground with a collar of stone, and brass cap mkd.,

Dependent Resurvey of a Portion of
the Subdivision of T. 16 S., R. 11 E.

CHAINS

T16S R11E
N1/16
S15|S14
1969

20.40 Wash, drains NE.

40.06 The cor. of secs. 10, 11, 14 and 15, is monumented with a sandstone, 12x12x6 ins., badly weathered and broken, set in a mound of stone - no visible marks. This position is harmoniously related to existing found corners and is accepted as the best evidence of the orig. cor. position.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground with the orig. stone buried alongside and in a collar of stone, with brass cap mkd.,

T16S R11E
S10|S11
S15|S14
1969

Land, nearly level.
Soil, rocky clay.
No timber.
Undergrowth, low brush and grass.

Beginning at the cor. of secs. 11, 12, 13 and 14.

S. 89° 57' W., bet. secs. 11 and 14.

Over rolling bench land through low brush and grass.

40.14 Point for the ½ sec. cor. of secs. 11 and 14 at proportionate distance. No evidence of the orig. cor. remains.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.,

T16S R11E
½ — S11
S14
1969

Raise a mound of stone, 2 ft. base, 1 ft. high, to the W.

60.21 Point for the W1/16 cor. of secs. 11 and 14.

Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground in a mound of stone, 3 ft. base to top, with brass cap mkd.,

T16S R11E
W1/16 — S11
S14
1969

Over rocky and broken land through low brush and grass.

Dependent Resurvey of a Portion of
the Subdivision of T. 16 S., R. 11 E.

CHAINS

- 73.50 Wash, 20 lks. wide, 8 ft. deep, drains S. 10° W., irregularly.
- 80.28 The cor. of secs. 10, 11, 14 and 15.
Land, rolling.
Soil, rocky clay.
No timber.
Undergrowth, low brush and grass.
- N. $0^{\circ} 04'$ W., bet. secs. 10 and 11.
Over nearly level land through low brush and grass.
- 0.29 Fence, bears E. and W., fence cor. bears W. 16 lks.; thence S. $11^{\circ} 07'$ W.
- 9.50 Creek, 10 lks. wide, 2 ft. deep, drains S. 65° E.
- 20.055 Point for the S1/16 cor. of secs. 10 and 11.
Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground with a collar of stone, with brass cap mkd.,
- T16S R11E
S1/16
S10|S11
1969
- 21.00 Graded dirt road, bears N. 83° E. and S. 83° W.
- 37.65 Wash, drains S. 18° W.
- 40.11 The $\frac{1}{2}$ sec. cor. of secs. 10 and 11 is monumented with a limestone, 12x8x8 ins. (record 16x14x10 ins.), plainly mkd. $\frac{1}{2}$ on the W. face and firmly set in a mound of stone
At the cor. point
Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 29 ins. in the ground with the orig. stone buried alongside, with brass cap mkd.,
- T16S R11E
 $\frac{1}{2}$
S10|S11
1969
- Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, to the W.
-
- N. $0^{\circ} 15'$ E., beginning new measurement.
- 3.20 Enter cultivated land.
- 40.19 Point for the cor. of secs. 2, 3, 10 and 11 at proportionate distance. There is no remaining evidence of the orig. cor.

Dependent Resurvey of a Portion of
the Subdivision of T. 16 S., R. 11 E.

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.,

T16S R11E

$$\begin{array}{c} \frac{S3}{S10} | \frac{S2}{S11} \end{array}$$

1969

Set a 6 ft. steel fence post alongside the cor.

The cor. is located in an irrigation ditch at the N. end of a field.

Land, nearly level and cultivated.

Soil, clay.

No timber.

No undergrowth.

Beginning at the cor. of secs. 1, 2, 11 and 12.

W., bet. secs. 2 and 11.

Over rolling and broken land through low brush and grass.

0.50 Rocky wash, 20 lks. wide, 5 ft. deep, drains N. 1.50 chs.; thence N. 40° E.

40.06 The $\frac{1}{4}$ sec. cor. of secs. 2 and 11 is monumented with a sandstone, 15x10x4 ins. (record 20x12x12 ins.), plainly mkd. $\frac{1}{4}$ on the N. face and firmly set in a collar of stone.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 14 ins. in the ground on solid rock with the orig. stone buried alongside, in a mound of stone, 3 ft. base to top, with brass cap mkd.,

T16S R11E

$$\frac{1}{4} \frac{S2}{S11}$$

1969

N. $89^\circ 36'$ W., beginning new measurement.

Over rolling land through low brush and grass.

3.40 Trail road, bears N. 25° E. and S. 25° W., irregularly.

14.50 Trail road, bears N. 30° E. and S. 30° W.

26.60 Trail road, bears N. 50° W. and S. 30° E., irregularly.

40.17 The cor. of secs. 2, 3, 10 and 11.

Land, rolling.

Soil, rocky clay.

No timber.

Undergrowth, low brush and grass.

Dependent Resurvey of a Portion of
the Subdivision of T. 16 S., R. 11 E.

CHAINS

N. 0° 14' E., bet. secs. 2 and 3.

Over nearly level cultivated land.

- 7.30 Trail road, bears N. 60° W. and S. 60° E.
- 20.35 Irrigation ditch, drains N. 26° E.; leave cultivated land; continue over gently rolling land.
- 21.00 Trail road, bears N. 26° E. and S. 26° W.
- 40.19 Point for the $\frac{1}{4}$ cor. of secs. 2 and 3 at proportionate distance. No evidence of the orig. cor. remains.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground with a collar of stone, with brass cap mkd.,

T16S R11E

$\frac{1}{4}$
S3|S2

1969

- 79.22 Intersect the Third Standard Parallel South on the S. bdy. of sec. 34, T. 15 S., R. 11 E. Point for the closing cor. of secs. 2 and 3, T. 16 S., R. 11 E., at proportionate distance, longitudinally. There is no remaining evidence of the orig. cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T15S R11E

S34

S3|S2

CC

T16S R11E

1969

No accessories available.

The standard cor. of secs. 34 and 35, T. 15 S., R. 11 E. a $2\frac{1}{2}$ in. iron post, set, mkd., and witnessed as previously described, bears N. 89° 52' E., 3.10 chs.

Land, gently rolling.

Soil, clay.

No timber.

Undergrowth, low brush and grass.

The point for the $\frac{1}{4}$ sec. cor. of sec. 2 on the N. bdy. of the township, at midpoint bet. the closing cor. of secs. 2 and 3, and the closing cor. of secs. 1 and 2.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T15S

$\frac{1}{4}$ S2

T16S R11E

1969

No accessories available.

Dependent Resurvey of a Portion of
the Subdivision of T. 16 S., R. 11 E.

CHAINS

The standard $\frac{1}{2}$ sec. cor. of sec. 35, T. 15 S., R. 11 E., a $2\frac{1}{2}$ in. iron post, set, mkd., and witnessed as previously described, bears N. $89^{\circ} 52' E.$, 3.16 chs.

Reestablishment of the Survey Executed
by J. T. Breckon in 1895.

Beginning at the cor. of secs. 3, 4, 33 and 34 on the
S. bdy. of the township.

N. $1^{\circ} 12' W.$, bet. secs. 33 and 34.

Over rolling and broken land through scattered junipers,
low brush and grass.

14.00 Bottom of a canyon, drains N. $50^{\circ} W.$; asc. 50 ft. over
a SW. slope.

20.00 Spur ridge, projects N. $60^{\circ} W.$ from S. $60^{\circ} E.$; desc.
80 ft. over a NW. slope.

29.50 Draw, drains NW.; asc. 50 ft. over a SW. slope.

33.00 Low spur, projects N. $80^{\circ} W.$; desc. 80 ft. over a N.
slope.

40.28 The $\frac{1}{2}$ sec. cor. of secs. 33 and 34 is monumented with a
sandstone, 20x12x7 ins. (record 16x13x10 ins.), plainly
mkd. $\frac{1}{2}$ on the W. face and firmly set.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins.
in the ground with the orig. stone buried alongside in
a collar of stone, with brass cap mkd.

T16S R11E

$\frac{1}{2}$

S33|S34

1969

N. $1^{\circ} 13' E.$, beginning new measurement.

Over nearly level bottom land.

20.265 Point for the N1/16 cor. of secs. 33 and 34.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 8 ins.
in the ground on solid rock in a mound of stone, 4 ft.
base to top, with brass cap mkd.,

T16S R11E

N1/16

S33|S34

1969

24.70 Wash, drains NE.

Dependent Resurvey of a Portion of
the Subdivision of T. 16 S., R. 11 E.

CHAINS

40.53 The cor. of secs. 27, 28, 33 and 34 is monumented with a sandstone, 15x12x9 ins., dimly mkd. and set in a mound of stone.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground with the orig. stone buried alongside, with brass cap mkd.

T16S R11E
S28|S27
S33|S34

1969

Raise a mound of stone, 2 ft. base, 1½ ft. high, to the W. of the cor.

The cor. is located in an old fence line that bears N. and S.

Land, nearly level.
Soil, sandy.
No timber.
Undergrowth, low brush and grass.

Beginning at the cor. of secs. 26, 27, 34 and 35.

S. 89° 55' W., bet. secs. 27 and 34.

Over broken land through scattered scrub juniper and scrub pinon.

- 9.20 Jeep road, bears NW. and SE.
- 35.50 Draw, drains N. 10° W.
- 40.02 Point for the ¼ sec. cor. of secs. 27 and 34 at proportionate distance. No evidence of the orig. cor. remains
Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground on solid rock in a mound of stone, 2½ ft. base to top, with brass cap mkd.

T16S R11E
¼ — S27
S34

1969

Over nearly level land through sagebrush.

- 43.70 Bend in stream, 20 lks. wide, 2 ft. deep, drains N. 80° E. from N. 80° W.
- 50.90 The same stream as above, drains N. 80° E. from SW.
- 60.03 Point for the W1/16 cor. of secs. 27 and 34.
Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.,

Dependent Resurvey of a Portion of
the Subdivision of T. 16 S., R. 11 E.

CHAINS	
	<p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T16S R11E W1/16 S27 S34 1969</p> <p>Asc. 95 ft. over broken E. slope.</p>
68.50	Top of ridge, bears N. and S., irregularly; desc. 60 ft. over SW. slope.
73.30	The same stream as above, drains S. 10° E.; enter sage-brush covered flat.
80.04	The cor. of secs. 27, 28, 33 and 34.
	<p>Land, nearly level. Soil, clay. No timber. Undergrowth, high brush.</p>
	<p>N. 0° 28' W., bet. secs. 27 and 28.</p> <p>Over nearly level land.</p>
3.40	Creek, 15 lks. wide, 2 ft. deep, drains N. 60° E., irregularly.
6.70	Leave flat; asc. 40 ft. on SE. slope to S1/16 cor.
20.09	Point for the S1/16 cor. of secs. 27 and 28.
	<p>Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground on solid rock in a mound of stone, 3 ft. base to top, with brass cap mkd.</p> <p style="text-align: center;">T16S R11E S1/16 S28 S27 1969</p> <p>Continue ascent of 130 ft. over SE. slope.</p>
30.20	Top of ridge, bears N. 40° E. and S. 40° W.; desc. 100 ft. over NE. slope.
38.70	End descent; draw, drains S. 60° E.
40.18	Point for the ¼ sec. cor. of secs. 27 and 28, at proportionate distance. No evidence of the orig. cor. remains.
	<p>Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground on solid rock with a collar of stone, with brass cap mkd.,</p> <p style="text-align: center;">T16S R11E ¼ S28 S27 1969</p>

Dependent Resurvey of a Portion of
the Subdivision of T. 16 S., R. 11 E.

CHAINS

- 41.30 Begin gradual ascent over a series of rolling hills.
- 58.90 Trail road, bears N. 40° W. and S. 40° E., irregularly.
- 80.36 The cor. of secs. 21, 22, 27 and 28, is monumented with a sandstone, 19x9x8 ins. (record 16x10x6 ins.), firmly set and plainly mkd. with 2 notches on the S. and 3 notches on the E.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground with the orig. stone buried alongside, with brass cap mkd.

T16S R11E
S21 | S22
S28 | S27
 1969

Raise a mound of stone, 2½ ft. base, 1½ ft. high, to the W.

Land, broken and rolling.
 Soil, rocky clay.
 No timber.
 Undergrowth, low brush and grass.

Beginning at the cor. of secs. 22, 23, 26 and 27.

S. 89° 33' W., bet. secs. 22 and 27.

Over rocky, broken land through low brush and grass.

- 40.01 The ¼ sec. cor. of secs. 22 and 27, is monumented with a sandstone, 14x12x4 ins. (record 16x12x8 ins.), plainly mkd. ¼ on the W. face, and a mound of stone to the N.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground on solid rock in a mound of stone, 4 ft. base to top, with brass cap mkd.

T16S R11E
 ¼ — S22
 S27
 1969

The cor. is located on a SW. slope; the top of a hill bears E. 60 lks. distance.

N. 89° 39' W., beginning new measurement.

- 16.40 Asc. 50 ft. over E. slope.
- 20.60 Top of ascent, continue over rocky, broken land.

Dependent Resurvey of a Portion of
the Subdivision of T. 16 S., R. 11 E.

CHAINS	
40.42	<p>The cor. of secs. 21, 22, 27 and 28.</p> <p>Land, broken. Soil, rocky clay. No timber. Undergrowth, low brush and grass.</p>
<p>Reestablishment of the Resurvey Executed by J. T. Breckon in 1897.</p>	
	<p>N. 0° 02' W., bet. secs. 21 and 22.</p>
	<p>Over rolling and broken land through low brush and grass.</p>
14.30	<p>Spur, projects to the W.; desc. 65 ft. over NW. slope.</p>
20.50	<p>Bottom of draw, drains N. 25° E.; asc. 65 ft. over SE. slope.</p>
23.30	<p>Top of spur, projects E., irregularly; desc. over gently sloping, broken land.</p>
40.19	<p>The $\frac{1}{2}$ sec. cor. of secs. 21 and 22, is monumented with a limestone, 20x18x8 ins. (record 18x12x8 ins.), firmly set and plainly mkd. $\frac{1}{2}$ on the E. face.</p>
	<p>At the cor. point</p>
	<p>Set an iron post, 30 ins. long, 2$\frac{1}{2}$ ins. diam., 12 ins. in the ground on solid rock with the orig. stone alongside in a mound of stone, 3 ft. base to top, with brass cap mkd.,</p>
	<p>T16S R11E $\frac{1}{2}$ S21 S22 1969</p>
	<p>N. 0° 03' E., beginning new measurement.</p>
3.00	<p>Top of ridge, bears N. 50° E. and W., irregularly; desc. 50 ft. over broken N. slope.</p>
20.055	<p>Point for the N1/16 cor. of secs. 21 and 22.</p>
	<p>Set an iron post, 30 ins. long, 2$\frac{1}{2}$ ins. diam., 24 ins. in the ground with a collar of stone, with brass cap mkd.</p>
	<p>T16S R11E N1/16 S21 S22 1969</p>
	<p>Asc. 35 ft. over S. slope.</p>

Dependent Resurvey of a Portion of
the Subdivision of T. 16 S., R. 11 E.

CHAINS

- 25.00 Point of spur, projects W. irregularly; desc. 40 ft. over rocky N. slope.
- 27.10 Creek, 15 lks. wide, 2 ft. deep, drains N. 85° E., irregularly. Continue over nearly level land.
- 40.11 The cor. of secs. 15, 16, 21 and 22, is monumented with a sandstone, 16x12x5 ins., plainly mkd. with 3 notches on the S. and 3 notches on the E., firmly set.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground on solid rock with the orig. stone alongside and in a mound of stone, 3 ft. base to top, with brass cap mkd.,

T16S R11E

S16	S15
S21	S22

1969

Land, gently rolling.
Soil, clay.
No timber.
Undergrowth, low brush and grass.

Beginning at the cor. of secs. 14, 15, 22 and 23.

S. 89° 55' W., bet. secs. 15 and 22.

Over rocky and broken land through low brush and grass.

- 12.00 Creek, 15 lks. wide, 2 ft. deep, drains N. 70° E., from the S.
- 40.12 The ¼ sec. cor. of secs. 15 and 22, is monumented with a sandstone, 10x6x4 ins. (record 16x12x5 ins.), above ground, plainly mkd. ¼ on the N. face, and firmly set.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground with the orig. stone buried alongside, with brass cap mkd.,

T16S R11E

¼	S15
	S22

1969

Set a pine post, 4 ins. diam., 5 ft. remaining above ground alongside.

S. 89° 58' W., beginning new measurement.

Dependent Resurvey of a Portion of
the Subdivision of T. 16 S., R. 11 E.

CHAINS	
20.04	<p>Over rolling land through high brush.</p> <p>Point for the W1/16 cor. of secs. 15 and 22.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T16S R11E W1/16 $\frac{S15}{S22}$ 1969</p>
40.08	<p>Over nearly level land through greasewood.</p> <p>The cor. of secs. 15, 16, 21 and 22.</p> <p>Land, rolling. Soil, clay. No timber. Undergrowth, low brush and grass.</p>
20.24	<p>N. 0° 03' E., bet. secs. 15 and 16.</p> <p>Over gently rolling land through low brush and grass.</p> <p>Point for the S1/16 cor. of secs. 15 and 16.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground with a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T16S R11E S1/16 S16 S15 1969</p>
40.48	<p>The ¼ sec. cor. of secs. 15 and 16, is monumented with a sandstone, 14x12x12 ins., dimly mkd. ¼ on the W. face and is firmly set.</p> <p>At the cor. point</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground with the orig. stone buried alongside, with brass cap mkd.,</p> <p style="text-align: center;">T16S R11E ¼ S16 S15 1969</p>
34.50	<p>No accessories available.</p> <hr/> <p>N. 0° 27' E., beginning new measurement.</p> <p>Graded dirt road, bears N. 80° E. and S. 80° W., irregularly.</p>

Dependent Resurvey of a Portion of
the Subdivision of T. 16 S., R. 11 E.

CHAINS

40.33 The cor. of secs. 9, 10, 15 and 16, is monumented with a sandstone, 18x12x5 ins., badly weathered 3 notches visible on the E. side and firmly set.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground with the orig. stone buried alongside, with brass cap mkd.,

T16S R11E

S9	S10
S16	S15

1969

Land, gently rolling.
Soil, clay.
No timber.
Undergrowth, low brush and grass.

Beginning at the cor. of secs. 10, 11, 14 and 15.

N. 88° 54' W., bet. secs. 10 and 15.

Over rolling land through low brush and grass.

8.00 Asc. 40 ft. over E. slope.

16.00 Top of low hill, continue over rolling land.

19.67 Point for the E1/16 cor. of secs. 10 and 15.

Set an iron post, 30 ins. long, 2½ ins. diam., 4 ins. in the ground in a mound of stone, 4 ft. base to top, with brass cap mkd.

T16S R11E

E1/16	S10
	S15

1969

35.80 Wash, 50 lks. wide, 6 ft. deep, drains N. 15° E., irregularly.

38.80 Graded dirt road, on a curve, bears N. 30° E. and W.

39.34 The ¼ sec. cor. of secs. 10 and 15 as determined by the cor. of fences which bear N. and W. This point is accepted as the best remaining evidence of the orig. cor. position.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground on the S. side of the above fence cor., with brass cap mkd.,

T16S R11E

¼	S10
	S15

1969

Dependent Resurvey of a Portion of
the Subdivision of T. 16 S., R. 11 E.

CHAINS	
	<p>From the cor., the center of a graded dirt road which bears E. and W. irregularly, bears S. 25 lks. distance.</p> <hr/> <p>N. 89° 36' W., beginning new measurement.</p>
22.50	The intersection of graded dirt roads which bear N. 20° W., E. and S. 85° W., irregularly.
40.08	<p>The cor. of secs. 9, 10, 15 and 16.</p> <p>Land, rolling. Soil, rocky clay. No timber. Undergrowth, low brush and grass.</p>
	<p>N. 0° 02' E., bet. secs. 9 and 10.</p> <p>Over nearly level land through low brush and grass.</p>
39.20	Jeep road, bears NW. and SE.
40.44	<p>The ¼ sec. cor. of secs. 9 and 10 is monumented with a sandstone, 20x10x3 ins. (record 12x10x4 ins.), plainly mkd. ¼ on the W. face and is firmly set.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground with the orig. stone buried alongside, with brass cap mkd.,</p> <p style="text-align: center;">T16S R11E ¼ S9 S10 1969</p> <hr/>
	<p>N. 1° 04' W., beginning new measurement.</p>
3.90	Enter cultivated land.
12.90	Leave cultivated land.
14.00	Wash, 40 lks. wide, 9 ft. deep, drains N. 40° E., irregularly.
19.89	<p>Point for the N1/16 cor. of secs. 9 and 10.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground with a collar of stone, with brass cap mkd.,</p> <p style="text-align: center;">T16S R11E N1/16 S9 S10 1969</p>
24.60	Enter high brush.
28.20	Wash, 30 lks. wide, 6 ft. deep, drains S. 10° E., irregularly.

Dependent Resurvey of a Portion of
the Subdivision of T. 16 S., R. 11 E.

CHAINS

39.78 Point for the cor. of secs. 3, 4, 9 and 10 at proportionate distance. No evidence of the orig. cor. remains

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T16S R11E

S4		S3
S9		S10

1969

A 2x4 inch pine post, 3 ft. above ground, set alongside the cor.

Land, nearly level.
Soil, clay.
No timber.
Undergrowth, high greasewood.

Beginning at the cor. of secs. 2, 3, 10 and 11.

N. 89° 21' W., bet. secs. 3 and 10.

Over nearly level land through low brush and grass.

17.70 Enter cultivated land.

25.00 Irrigation ditch, drains N. 70° E.

31.40 Leave cultivated land.

37.00 Irrigation ditch, drains S. 30° E.

40.15 Point for the ½ sec. cor. of secs. 3 and 10 at proportionate distance. No evidence of the orig. cor. remains.

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground in a collar of stone, with brass cap mkd.,

T16S R11E

½	—	S3
		S10

1969

Set a pine post, 4 ins. diam., 3 ft. above ground, alongside the cor.

44.50 Irrigation ditch, drains N. 80° E.

45.50 Trail road, bears N. 80° E. and S. 60° W.

52.00 Trail road, bears N. 20° W. and S. 20° E.

53.00 Irrigation ditch, drains S. 20° E.

57.00 Irrigation ditch, drains NE. from the S.

65.00 Irrigation ditch, drains SE.

Dependent Resurvey of a Portion of
the Subdivision of T. 16 S., R. 11 E.

CHAINS	
66.10	Enter cultivated land.
69.70	Leave cultivated land, enter high brush.
74.00	Wash, drains S. 20° W.
80.30	The cor. of secs. 3, 4, 9 and 10.
	Land, nearly level. Soil, clay. No timber. Undergrowth, high brush.
	N. 0° 06' W., bet. secs. 3 and 4.
10.00	Irrigation ditch, drains S. 70° E.
10.40	Trail road, bears N. 70° W. and S. 70° E., irregularly.
30.60	Trail road, bears N. 30° W. and S. 30° E., irregularly; desc. 45 ft. on NE. slope.
35.50	Bottom of ravine, drains S. 40° E., irregularly.
39.77	Point for the ½ sec. cor. of secs. 3 and 4 at proportionate distance. No evidence of the orig. cor. remains.
	Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground with a collar of stone, with brass cap mkd.,
	<p style="text-align: center;">T16S R11E $\frac{1}{2}$ S4 S3 1969</p>
	Raise a mound of stone, 2 ft. base, 1½ ft. high, to the W. of the cor.
	The cor. is located on top of a ridge that bears N. 30° E. and S. 30° W., irregularly.
78.20	Intersect the Third Standard Parallel South on the S. bdy. of sec. 33, T. 15 S., R. 11 E. The closing cor. of secs. 3 and 4 is monumented with a broken shale stone, 12x10x3 ins., plainly mkd. CC and parts of the stone are firmly set.
	At the cor. point
	Set an iron post, 30 ft. long, 2½ ins. diam., 24 ins. in the ground with the orig. stone buried alongside, with brass cap mkd.,
	<p style="text-align: center;">T15S R11E S33 S4 S3 CC T16S R11E 1969</p>

Dependent Resurvey of a Portion of
the Subdivision of T. 16 S., R. 11 E.

CHAINS

The standard cor. of secs. 33 and 34, T. 15 S., R. 11 E., a $2\frac{1}{2}$ inch iron pipe, set, mkd. and witnessed as previously described, bears N. $89^{\circ} 55'$ E., 3.20 chs.

Land, gently rolling.
Soil, clay.
No timber.
Undergrowth, low brush and grass.

Point for the $\frac{1}{2}$ sec. cor. of sec. 3 on the N. bdy. of the township at midpoint bet. the closing cor. of secs. 2 and 3 and the closing cor. of secs. 3 and 4.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.,

T15S
 $\frac{1}{2}$ S3
T16S R11E
1969

Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, to the S. of the cor.

The standard $\frac{1}{4}$ sec. cor. of sec. 34, T. 15 S., R. 11 E., a $2\frac{1}{2}$ inch iron pipe, set, mkd. and witnessed as previously described in this record, bears N. $89^{\circ} 55'$ E., 3.14 chs.

Reestablishment of the Survey Executed
by J. T. Breckon in 1895.

Beginning at the cor. of secs. 4, 5, 32 and 33 on the S. bdy. of the township.

N. $1^{\circ} 19'$ W., bet. secs. 32 and 33.

Over rolling land through low brush and grass.

34.40 Enter bottom of canyon, bears NE. and SW., irregularly.

40.55 The $\frac{1}{2}$ sec. cor. of secs. 32 and 33, is monumented with a sandstone, 14x10x3 ins. (record 18x12x4 ins.), plainly mkd. $\frac{1}{2}$ on the W. face and is firmly set.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground with the orig. stone buried alongside and in a collar of stone, with brass cap mkd.

T16S R11E
 $\frac{1}{2}$
S32|S33
1969

N. $1^{\circ} 28'$ E., beginning new measurement.

Dependent Resurvey of a Portion of
the Subdivision of T. 16 S., R. 11 E.

CHAINS	
	Over nearly level canyon bottom through high greasewood.
11.50	Creek, 15 lks. wide, 2 ft. deep, drains N. 20° E., irregularly.
12.60	Asc. gentle SE. slope.
19.905	Point for the N1/16 cor. of secs. 32 and 33. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd., T16S R11E N1/16 S32 S33 1969 Raise a mound of stone, 1½ ft. base, 1 ft. high, to the W. of the cor.
32.40	Trail road, bears E. and W., irregularly, over rolling benchland.
39.81	The cor. of secs. 28, 29, 32 and 33, is monumented with a sandstone, 16x10x8 ins. (record 18x12x9 ins.), dimly mkd. and firmly set in a collar of stone. At the cor. point Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground with the orig. stone buried alongside and in a collar of stone, with brass cap mkd., T16S R11E S29 S28 S32 S33 1969 Land, rolling and broken. Soil, rocky clay. No timber. Undergrowth, low brush and grass.
	Beginning at the cor. of secs. 27, 28, 33 and 34. N. 89° 42' W., bet. secs. 28 and 33.
1.50	Stream, 20 lks. wide, 2 ft. deep, drains N.
8.00	Recross same stream, 20 lks. wide, 2 ft. deep, drains S. 70° E.
15.80	Cross same stream as mentioned above, drains N. 40° E.
20.18	Point for the E1/16 cor. of secs. 28 and 33.
33.00	Trail road, bears N. 60° E. and S. 60° W.
38.00	Wash, 6 lks. wide, 1 ft. deep, drains S. 70° E. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.,

Dependent Resurvey of a Portion of
the Subdivision of T. 16 S., R. 11 E.

CHAINS

T16S R11E
E1/16 $\frac{S28}{S33}$
1969

- 40.36 The $\frac{1}{4}$ sec. cor. of secs. 28 and 33, is monumented with a broken sandstone, 6x6x2 ins. (record 18x14x4 ins.), plainly mkd. $\frac{1}{4}$; some remains of the stone are firmly set.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground with the orig. stone buried alongside in a collar of stone, with brass cap mkd.

T16S R11E
 $\frac{1}{4}$ $\frac{S28}{S33}$
1969

From the cor., a wash, 6 lks. wide, 8 ins. deep, drains E., irregularly, bears N. 12 lks. distance.

Enter rocky, broken land.

S. 89° 17' W., beginning new measurement.

- 20.145 Point for the W1/16 cor. of secs. 28 and 33.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T16S R11E
W1/16 $\frac{S28}{S33}$
1969

Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, to the N. of the cor.

- 40.29 The cor. of secs. 28, 29, 32 and 33.

Land, rocky and broken.
Soil, rocky clay.
No timber.
Undergrowth, low brush and grass.

Reestablishment of the Resurvey Executed
by J. T. Breckon in 1897.

N. 0° 01' E., bet. secs. 28 and 29.

Over rolling and broken gentle S. slope.

- 6.80 Desc. 50 ft. over rocky NW. slope to S1/16 cor.

- 20.16 Point for the S1/16 cor. of secs. 28 and 29.

Dependent Resurvey of a Portion of
the Subdivision of T. 16 S., R. 11 E.

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., on solid rock in a mound of stone, 4½ ft. base to top, with brass cap mkd.

T16S R11E

S1/16

S29|S28

1969

40.32

The ½ sec. cor. of secs. 28 and 29, is monumented with a sandstone, 16x16x10 ins., dimly mkd. ¼ on the W. face and firmly set in a mound of stone.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground on solid rock with the orig. stone buried alongside and in a mound of stone, 3 ft. base to top, with brass cap mkd.,

T16S R11E

¼

S29|S28

1969

N. 0° 45' W., beginning new measurement.

11.20

Enter gently rolling land through low brush and grass.

20.115

The point for the N1/16 cor. of secs. 28 and 29.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground in a collar of stone, with brass cap mkd.,

T16S R11E

N1/16

S29|S28

1969

35.60

Wash, 30 lks. wide, 5 ft. deep, drains S. 80° E., irregularly.

40.23

Point for the cor. of secs. 20, 21, 28 and 29 at proportionate distance. No evidence of the orig. cor. remains.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.,

T16S R11E

S20|S21

S29|S28

1969

Set a 6 ft. steel fence post alongside the cor.

Land, gently rolling.

Soil, clay.

No timber.

Undergrowth, low brush and grass.

Dependent Resurvey of a Portion of
the Subdivision of T. 16 S., R. 11 E.

CHAINS

- Beginning at the cor. of secs. 21, 22, 27 and 28.
S. 89° 53' W., bet. secs. 21 and 28.
Over rocky, broken land through low brush and grass.
- 1.60 Wash, 40 lks. wide, 8 ft. deep, drains N., irregularly;
asc. 55 ft. over E. slope.
- 8.90 Top of ascent; desc. 15 ft. over W. slope.
- 11.00 Base of descent.
- 14.00 Wash, drains N. 20° W.
- 36.20 Trail road, bears N. 50° W. and S. 50° E., irregularly.
- 40.18 Point for the $\frac{1}{4}$ sec. cor. of secs. 21 and 28 at propor-
tionate distance. No evidence of the orig. cor. remains
- Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T16S R11E

$$\frac{1}{4} \frac{S21}{S28}$$

1969

Raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high,
to the N. of the cor.

- 42.00 Wash, drains NW.
- 50.00 Enter gently rolling land.
- 58.00 Wash, drains N.
- 80.36 The cor. of secs. 20, 21, 28 and 29.
- Land, gently rolling.
Soil, clay.
No timber.
Undergrowth, greasewood and grass.
- N. 0° 07' W., bet. secs. 20 and 21.
Over gently rolling land through low brush and grass.
- 0.20 Trail road, bears N. 80° W. and S. 70° E.
- 40.23 Point for the $\frac{1}{4}$ sec. cor. of secs. 20 and 21, determined
latitudinally by an old fence bearing E. and W., longi-
tudinally by proportionate measurement and falls in a
dirt road which bears N. 31° W. and S. 31° E.
- At the cor. point
- Bury broken glass 12 ins. under ground.
- From which,
- An iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., set 24 ins.
in the ground, for a reference monument, bears S. 47°
09' E., 26 ft. dist., with the brass cap mkd.,

Dependent Resurvey of a Portion of
the Subdivision of T. 16 S., R. 11 E.

CHAINS

T16S R11E

RM

1969

An iron post, 30 ins. long, 2½ ins. diam., set 24 ins. in the ground, for a reference monument, bears S. 25° 07' W., 25 ft. dist., with the brass cap mkd

T16S R11E

1969

N. 0° 07' W., beginning new measurement.

2.40 Enter cultivated land.

40.43 Point for the cor. of secs. 16, 17, 20 and 21 at proportionate distance. No evidence of the orig. cor. remains.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.,

T16S R11E

S17	S16
S20	S21

1969

Set a 6 ft. steel fence post alongside the cor.

The cor. is located on the N. side of a cultivated field in swampy land.

Land, cultivated.

Soil, clay.

No timber.

No undergrowth.

Reestablishment of the Survey Executed
by J. T. Breckon in 1895.

Beginning at the cor. of secs. 15, 16, 21 and 22.

N. 89° 53' W., bet. secs. 16 and 21.

Over rolling land through low brush and grass.

7.50 Wash, drains S.

15.20 Fence, bears N. 15° W. and S. 15° E.

17.60 Fence, bears N. 40° W. and S. 40° E., enter nearly level land with high brush.

40.21 Point for the ¼ sec. cor. of secs. 16 and 21 at proportionate distance. No evidence of the orig. cor. remains.

Dependent Resurvey of a Portion of
the Subdivision of T. 16 S., R. 11 E.

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T16S R11E

$\frac{1}{2}$ $\frac{S16}{S21}$

1969

Set a 6 ft. steel fence post alongside the cor.

52.80 Creek, 15 lks. wide, 1 ft. deep, drains S. 20° E., irregularly.

80.42 The cor. of secs. 16, 17, 20 and 21.

Land, nearly level.

Soil, clay.

No timber.

Undergrowth, high greasewood.

N. $0^\circ 28'$ E., bet. secs. 16 and 17.

Over nearly level land through high greasewood.

14.00 Wash, drains S. 70° E.

20.215 Point for the S1/6 cor. of secs. 16 and 17.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T16S R11E

S1/16

S17|S16

1969

Set a juniper post, 8 ins. diam., 2 ft. remaining above ground, alongside the cor.

22.90 Trail road, bears E. and W., irregularly.

23.40 Enter cultivated land.

37.40 Leave cultivated land.

39.40 Irrigation ditch, drains S. 30° E.

40.43 Point for the $\frac{1}{2}$ sec. cor. of secs. 16 and 17 at proportionate distance. No evidence of the orig. cor. remains

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground in a collar of stone, with brass cap mkd.,

T16S R11E

$\frac{1}{2}$

S17|S16

1969

The cor. is located on a SW. slope 80 lks. N. of the base of the slope.

67.00 Graded dirt road, bears S. 80° E. and S. 60° W., irregularly.

Dependent Resurvey of a Portion of
the Subdivision of T. 16 S., R. 11 E.

CHAINS					
72.60	Asc. 80 ft. over S. slope, enter rolling and broken land.				
77.40	Top of ridge, bears E. and W., irregularly.				
80.86	<p>Point for the cor. of secs. 8, 9, 16 and 17 at proportionate distance. No evidence of the orig. cor. remains.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground in a mound of stone, 4 ft. base to top, with brass cap mkd.,</p> <div style="text-align: center;"> <p>T16S R11E</p> <table border="0"> <tr><td>S8</td><td>S9</td></tr> <tr><td>S17</td><td>S16</td></tr> </table> <p>1969</p> </div> <p>The cor. is located on the S. slope of a spur that projects to the W.</p> <p>Land, rolling and broken. Soil, rocky clay. No timber. Undergrowth, low brush and grass.</p>	S8	S9	S17	S16
S8	S9				
S17	S16				
Reestablishment of the Resurvey Executed by J. T. Breckon in 1897.					

	Beginning at the cor. of secs. 9, 10, 15 and 16.				
	S. 89° 41' W., bet. secs. 9 and 16.				
	Over rolling land through low brush and grass.				
34.70	Wash, 30 lks. wide, 6 ft. deep, drains S. 20° E., irregularly.				
39.99	<p>The ½ sec. cor. of secs. 9 and 16, is monumented with a sandstone, 18x12x3 ins., dimly mkd. ½ on the N. face, firmly set and with a small mound of stone to the N.</p> <p>At the cor. point</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground in a collar of stone, with brass cap mkd.,</p> <div style="text-align: center;"> <p>T16S R11E</p> <table border="0"> <tr><td>½</td><td>S9</td></tr> <tr><td></td><td>S16</td></tr> </table> <p>1969</p> </div>	½	S9		S16
½	S9				
	S16				

	N. 89° 21' W., beginning new measurement.				
40.11	The cor. of secs. 8, 9, 16 and 17.				

Dependent Resurvey of a Portion of
the Subdivision of T. 16 S., R. 11 E.

CHAINS

Land, rolling.
Soil, clay.
No timber.
Undergrowth, low brush and grass.

Reestablishment of the Survey Executed
by J. T. Breckon in 1895.

N. 1° 36' W., bet. secs. 8 and 9.

Over rocky, broken land.

28.00 Jeep road, bears N. 30° E. and S. 30° W.

40.44 The $\frac{1}{4}$ sec. cor. of secs. 8 and 9 is monumented with a sandstone, 18x12x4 ins., plainly mkd. $\frac{1}{4}$ on the W. face and firmly set.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground with the orig. stone buried alongside, with brass cap mkd.,

T16S R11E

$\frac{1}{4}$
S8|S9

1969

No accessories available.

N. 0° 11' E., beginning new measurement.

Over gently rolling land through low brush and grass.

5.50 Wash, 10 lks. wide, 4 ft. deep, drains N. 30° W., irregularly.

40.65 The cor. of secs. 4, 5, 8 and 9 is monumented with a sandstone, 20x20x4 ins., plainly mkd. with 5 notches on the S. face and 4 notches on the E. face, firmly set.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground with the orig. stone buried alongside, with brass cap mkd.,

T16S R11E

S5|S4
S8|S9

1969

Land, rolling.
Soil, clay.
No timber.
Undergrowth, low brush and grass.

Dependent Resurvey of a Portion of
the Subdivision of T. 16 S., R. 11 E.

127

CHAINS

Reestablishment of the Resurvey Executed
by J. T. Breckon in 1897.

Beginning at the cor. of secs. 3, 4, 9 and 10.

N. 88° 09' W., bet. secs. 4 and 9.

Over rolling land through high brush.

15.50 Wash, 220 lks. wide, 12 ft. deep, drains S. 60° E.,
irregularly.

20.035 Point for the E1/16 cor. of secs. 4 and 9.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.,

T16S R11E
E1/16 $\frac{S4}{S9}$
1969

No accessories available.

The cor. is between two washes that drain N. 60° E. and
S. 70° E., irregularly. Both washes are approximately
40 lks. wide, and 10 ft. deep. The intersection of the
washes bears E. 1.80 chs.

28.40 Trail road, bears N. 10° W. and S. 10° E., irregularly.

32.70 Asc. 75 ft. over E. slope.

37.90 Top of slope.

40.07 The ¼ sec. cor. of secs. 4 and 9, is monumented with a
limestone, 16x12x10 ins. (record 18x10x8 ins.), plainly
mkd. ¼ on the N. face and firmly set.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins.
in the ground with the orig. stone buried alongside,
with brass cap mkd.

T16S R11E
¼ $\frac{S4}{S9}$
1969

Raise a mound of stone, 2½ ft. base, 1½ ft. high,
to the N. of the cor.

Dependent Resurvey of a Portion of
the Subdivision of T. 16 S., R. 11 E.

CHAINS

S. 89° 48' W., beginning new measurement.

Over rolling land through high brush and grass.

19.70 Wash, drains N.

40.26 The cor. of secs. 4, 5, 8 and 9.

Land, rolling.

Soil, rocky clay.

No timber.

Undergrowth, low brush and grass.

N. 0° 03' W., bet. secs. 4 and 5.

Over rolling land through low brush and grass.

18.80 Wash, 20 lks. wide, 4 ft. deep, drains N. 80° E.,
irregularly.

28.00 Irrigation ditch, drains E.

29.50 Trail road, bears N. 70° E. and W.

39.27 Point for the $\frac{1}{4}$ sec. cor. of secs. 4 and 5 at propor-
tionate distance. No evidence of the orig. cor.
remains.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins.
in the ground in a collar of stone, with brass cap
mkd.,

T16S R11E

$\frac{1}{4}$

S5|S4

1969

Begin triangulation.

45.00 S. edge of swampy land.

62.00 N. edge of swampy land.

74.00 Trail road, bears NW. and SE.

77.07 End triangulation, intersect the Third Standard Parallel
South, on the S. bdy. of sec. 32, T. 15 S., R. 11 E.
Point for the closing cor. of secs. 4 and 5 at propor-
tionate distance, longitudinally. There is no remaining
evidence of the orig. cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins.
in the ground in a collar of stone, with brass cap
mkd.,

Dependent Resurvey of a Portion of
the Subdivision of T. 16 S., R. 11 E.

CHAINS

T15S R11E

$$\begin{array}{r} \text{S32} \\ \hline \text{S5} | \text{S4} \end{array}$$

C C

T16S R11E
1969

A wash, 12 lks. wide, 3 ft. deep, drains S. irregularly, bears W., 5 lks. distance from the cor.

The standard cor. of secs. 32 and 33, T. 15 S., R. 11 E., an iron post, 2½ ins. diam., set, mkd., and witnessed as previously described, bears S. 89° 59' E., 3.03 chs.

Land, rolling.

Soil, clay.

No timber.

Undergrowth, low brush and grass.

Point for the ¼ sec. cor. of sec. 4 on the N. bdy. of the township, at midpoint bet. the closing cor. of secs. 4 and 5 and the closing cor. of secs. 3 and 4.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

$$\begin{array}{r} \text{T15S} \\ \hline \frac{1}{4} \text{ S4} \end{array}$$
T16S R11E
1969

Raise a mound of stone, 1½ ft. base, 1½ ft. high, to the S. of the cor.

The standard ¼ sec. cor. of sec. 33, T. 15 S., R. 11 E., an iron post, 2½ ins. diam., mkd. and witnessed as previously described, bears S. 89° 59' E., 3.17 chs.

Reestablishment of the Survey Executed
by J. T. Breckon in 1895.

Beginning at the cor. of secs. 5, 6, 31 and 32 on the S. bdy. of the township.

N. 0° 20' E., bet. secs. 31 and 32.

Over nearly level land through greasewood.

40.27

Point for the ¼ sec. cor. of secs. 31 and 32 at proportionate distance. No evidence of the original corner remains.

Dependent Resurvey of a Portion of
the Subdivision of T. 16 S., R. 11 E.

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins.
in the ground in a collar of stone, with brass cap mkd.,

T16S R11E

$$\frac{1}{2}$$

S31|S32

1969

42.40 Enter cultivated land.

56.40 Leave cultivated land.

80.54 Point for the cor. of secs. 29, 30, 31 and 32 at pro-
portionate distance. No evidence of the original cor.
remains.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 29 ins.
in the ground, with brass cap mkd.

T16S R11E

$$\frac{S30}{S31} | \frac{S29}{S32}$$

1969

Raise a mound of stone, $1\frac{1}{2}$ ft. base, 1 ft. high,
to the W. of the cor.

The cor. is located on the S. edge of a wash, 20 lks.
wide, 4 ft. deep, drains irregularly SE.

Land, nearly level.

Soil, clay.

No timber.

Undergrowth, scattered greasewood and grass.

Beginning at the cor. of secs. 28, 29, 32 and 33.

N. $89^{\circ} 59'$ W., bet. secs. 29 and 32.

Over rocky, broken land.

17.60 Enter rolling land.

20.125 Point for the E1/16 cor. of secs. 29 and 32.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 29 ins.
in the ground, with brass cap mkd.

T16S R11E

$$\frac{E1/16}{S31} | \frac{S29}{S32}$$

1969

23.00 Trail road, bears NW. and SE.

40.25 Point for the $\frac{1}{2}$ sec. cor. of secs. 29 and 32 at propor-
tionate distance. No evidence of the orig. cor. remains

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins.
in the ground in a collar of stone, with brass cap mkd.,

Dependent Resurvey of a Portion of
the Subdivision of T. 16 S., R. 11 E.

CHAINS	
	<p style="text-align: center;">T16S R11E $\frac{1}{4}$ $\frac{S29}{S32}$ 1969</p>
65.00	Wash, 30 lks. wide, 7 ft. deep, drains S. 20° E., irregularly.
80.50	<p>The cor. of secs. 29, 30, 31 and 32.</p> <p>Land, gently rolling. Soil, clay. No timber. Undergrowth, low brush and grass.</p>
	<p>S. 89° 45' W., bet. secs. 30 and 31.</p> <p>Over nearly level land, low brush and grass.</p>
20.11	<p>Point for the E1/16 cor. of secs. 30 and 31.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground with a collar of stone, with brass cap mkd.,</p>
	<p style="text-align: center;">T16S R11E E1/16 $\frac{S30}{S31}$ 1969</p>
22.90	Graded dirt road, bears N. 45° E. and S. 45° W., irregularly.
40.22	<p>Point for the ¼ sec. cor. of secs. 30 and 31 at proportionate distance. No evidence of the orig. cor. remains.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground in a collar of stone, with brass cap mkd.,</p>
	<p style="text-align: center;">T16S R11E $\frac{1}{4}$ $\frac{S30}{S31}$ 1969</p>
	<p>From the cor., a wash, 15 lks. wide, 3 ft. deep, drains E., irregularly, bears S. 1.00 ch.</p> <p>Asc. 75 ft. over SE. slope.</p>
54.02	Top of ascent; over rolling land.
54.50	Jeep road, bears NE. and SW.
77.62	<p>The cor. of secs. 25, 30, 31 and 36 on the W. bdy. of the township, mkd. by an iron post, 2½ ins. diam., projecting 6 ins. above ground, with a 6 ft. steel fence post set alongside and a mound of stone, 2 ft. base, 1 ft. high, to the W. of the cor., with brass cap mkd.,</p>
	<p style="text-align: center;">T16S R10E R11E $\frac{S25}{S36} \frac{S30}{S31}$ 1969</p>

Dependent Resurvey of a Portion of
the Subdivision of T. 16 S., R. 11 E.

CHAINS

Land, gently rolling.
Soil, clay.
No timber.
Undergrowth, low brush and grass.

Beginning at the cor. of secs. 29, 30, 31 and 32.

N. 0° 24' E., bet. secs. 29 and 30.

Over nearly level land through scattered greasewood
and grass.

5.00 Canal, 10 lks. wide, 3 ft. deep, drains S. 40° E.,
irregularly.

14.10 Trail road, bears E. and W., irregularly.

30.40 Fence, bears N. 34° E. and S. 34° W.

30.60 Graded dirt road, bears N. 34° E. and S. 34° W.

40.27 The $\frac{1}{2}$ sec. cor. of secs. 29 and 30 is monumented with a
sandstone, 18x12x6 ins., (record 22x12x5 ins.), plainly
mkd. $\frac{1}{2}$ on the W. face and firmly set.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins.
in the ground with the orig. stone buried alongside,
with brass cap mkd.

T16S R11E

$\frac{1}{2}$
S30|S29

1969

Set a pine post, 8 ins. diam., 3 ft. above ground,
alongside the cor.

N. 1° 00' W., beginning new measurement.

16.00 Asc. 50 ft. over S. slope.

21.00 Top of bench; continue over rocky, broken land.

27.00 Jeep road, bears NE. and SW.

40.04 Point for the cor. of secs. 19, 20, 29 and 30 at pro-
portionate distance. No evidence of the orig. cor.
remains.

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins.
in the ground, with brass cap mkd.,

T16S R11E

S19|S20
S30|S29

1969

Raise a mound of stone, 2 ft. base, 1 ft. high
to the N. of the cor.

Dependent Resurvey of a Portion of
the Subdivision of T. 16 S., R. 11 E.

CHAINS

Land, rolling.
Soil, rocky clay.
No timber.
Undergrowth, low brush and grass.

Beginning at the cor. of secs. 20, 21, 28 and 29.

S. 89° 53' W., bet. secs. 20 and 29.

40.17

Point for the $\frac{1}{4}$ sec. cor. of secs. 20 and 29 at proportionate distance. No evidence of the orig. cor. remains.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.,

T16S R11E

$\frac{1}{4}$ $\frac{S20}{S29}$

1969

Set a juniper post, 3 ins. diam., 2 ft. remaining above ground, along side of the cor.

Raise a mound of stone, $1\frac{1}{2}$ ft. base, 1 ft. high, to the N. of the cor.

48.90

Graded dirt road, bears N. 30° E. and S. 30° W.

60.255

Point for the W1/16 cor. of secs. 20 and 29.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T16S R11E

W1/16 $\frac{S20}{S29}$

1969

Raise a mound of stone, 2 ft. base, 1 ft. high, to the N. of the cor.

From the cor., a wash, 8 lks. wide, 3 ft. deep, drains E., irregularly, bears E. .10 chs.

Asc. 90 ft. over SE. slope.

65.70

Top of rim, bears N. 35° E. and S. 35° W., irregularly.

67.70

Jeep road, bears N. 35° E. and S. 35° W.

80.34

The cor. of secs. 19, 20, 29 and 30.

Land, rolling.
Soil, rocky clay.
No timber.
Undergrowth, low brush and grass.

Reestablishment of the Resurvey Executed
by J. T. Breckon in 1897.

Dependent Resurvey of a Portion of
the Subdivision of T. 16 S., R. 11 E.

CHAINS

N. 89° 32' W., bet. secs. 19 and 30.

40.14 Point for the $\frac{1}{4}$ sec. cor. of secs. 19 and 30 at proportionate distance. No evidence of the orig. cor. remains

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 27 ins. in the ground, with brass cap mkd.,

T16S R11E

$\frac{1}{4}$ $\frac{S19}{S30}$

1969

Raise a mound of stone, $1\frac{1}{2}$ ft. base, 1 ft. high, to the N. of the cor.

Over rocky, broken land through low brush and grass.

41.64 Creek, 6 lks. wide, 1 ft. deep, drains N. 10° W.

73.50 Draw, drains SE.

77.37 The cor. of secs. 19, 24, 25 and 30, marked with an iron post, $2\frac{1}{2}$ ins. diam., projecting 8 ins. above ground with a mound of stone, 2 ft. base, 1 ft. high to the W., brass cap mkd.,

T16S
R10E R11E

$\frac{S24}{S25}$ | $\frac{S19}{S30}$

1969

Land, rolling and broken.

Soil, rocky clay.

No timber.

Undergrowth, low brush and grass.

Reestablishment of the Survey Executed
by J. T. Breckon in 1895.

Beginning at the cor. of secs. 19, 20, 29 and 30.

N. 0° 55' E., bet. secs. 19 and 20.

Over rolling land through low brush and grass.

17.70 Bottom of gully, 550 lks. wide, 40 ft. deep, drains N. 40° W., irregularly.

34.40 Bottom of gully, 410 lks. wide, 40 ft. deep, drains W., irregularly.

40.04 The $\frac{1}{4}$ sec. cor. of secs. 19 and 20 is monumented with a sandstone, 16x8x6 ins., plainly marked $\frac{1}{4}$ on the W. face and firmly set.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 14 ins. in the ground on solid rock with the orig. stone alongside and in a mound of stone, 3 ft. base to top, with brass cap

Dependent Resurvey of a Portion of
the Subdivision of T. 16 S., R. 11 E.

CHAINS

T16S R11E
 $\frac{1}{2}$
S19|S20
1969

N. 1° 14' W., beginning new measurement.

- 0.25 Trail road, bears E. and W.
- 21.50 Desc. 90 ft. over N. slope.
- 23.50 Bottom of descent, continue over nearly level bottom land.
- 40.16 Point for the cor. of secs. 17, 18, 19 and 20 at proportionate distance. No evidence of the orig. cor. remains.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.,

T16S R11E
S18|S17
S19|S20
1969

Raise a mound of stone, 2 ft. base, 1½ ft. high, to the W. of the cor.

Land, broken bottom land.
Soil, rocky clay.
No timber.
Undergrowth, low brush and grass.

Beginning at the cor. of secs. 16, 17, 20 and 21.

S. 89° 28' W., bet. secs. 17 and 20.

Over nearly level land through high greasewood.

- 7.20 Enter cultivated land.
 - 20.00 Graded dirt road, bears N. and S.
 - 25.10 Leave cultivated land.
 - 35.90 Asc. 55 ft. over ledges.
 - 40.21 Point for the $\frac{1}{2}$ sec. cor. of secs. 17 and 20 at proportionate distance. No evidence of the orig. cor. remains.
- Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground in a mound of stone, 3 ft. base to top, with brass cap mkd.,

T16S R11E
 $\frac{1}{2}$ — S17
S20
1969

Dependent Resurvey of a Portion of
the Subdivision of T. 16 S., R. 11 E.


CHAINS

The cor. is located on a steep E. slope 60 lks.
below the top of a ledge that bears N. and S.,
irregularly.

44.90 Over series of ledges and gullies draining irregularly
to the NE.

60.265 Point selected for the witness W1/16 cor. of secs. 17
and 20.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins.
in the ground in a collar of stone, with brass cap mkd.,



No accessories available.

60.315 The true point for the W1/16 cor. of secs. 17 and 20,
falls in a wash, 60 lks. wide, 12 ft. deep and drains
N. 10° W., irregularly.

68.00 Draw, drains N. 10° E.

80.42 The cor. of secs. 17, 18, 19 and 20.

Land, rolling and broken.
Soil, rocky clay.
No timber.
Undergrowth, low brush and grass.

Reestablishment of the Resurvey Executed
by J. T. Breckon in 1897.

N. 89° 29' W., bet. secs. 18 and 19.

Over nearly level land through low brush.


1.50 Wash, drains N.

14.10 Enter rocky, broken land; asc. 50 ft. over E. slope.

19.80 Top of ledge that bears N. and S., irregularly.

40.16 Point for the ½ sec. cor. of secs. 18 and 19 at propor-
tionate distance. No evidence of the orig. cor. remains.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.



Raise a mound of stone, 2 ft. base, 1½ ft. high,
to the N. of the cor.

Dependent Resurvey of a Portion of
the Subdivision of T. 16 S., R. 11 E.

137

CHAINS

77.47

The cor. of secs. 13, 18, 19 and 24 on the W. bdy. of the township, marked by an iron post, $2\frac{1}{2}$ ins. diam., projecting 6 ins. above ground with a 6 ft. steel fence post alongside and a mound of stone, 2 ft. base, 1 ft. high to the N., with brass cap mkd.,

T16S
R10E R11E
 $\frac{S13}{S24} | \frac{S18}{S19}$
1969

Land, broken.
Soil, rocky clay.
No timber.
Undergrowth, low brush and grass.

Reestablishment of the Survey Executed
by J. T. Breckon in 1895.

Beginning at the cor. of secs. 17, 18, 19 and 20.

N. $1^{\circ} 10'$ E., bet. secs. 17 and 18.

Over rolling and broken land through low brush.

2.50 Wash, drains N. 80° E.

20.00 Same wash, drains W.

28.00 Wash, drains E.

31.80 Asc. 50 ft. over S. slope.

32.20 Trail road, bears S. 80° E. and N. 80° W.

40.16 The $\frac{1}{4}$ sec. cor. of secs. 17 and 18 is monumented with a sandstone, 12x6x3 ins., plainly mkd. $\frac{1}{4}$ on the W. face and firmly set.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 3 ins. in the ground with the orig. stone alongside in a mound of stone, 4 ft. base to top, with brass cap mkd.,

T16S R11E
 $\frac{1}{4}$
S18 | S17
1969

N. $0^{\circ} 14'$ W., beginning new measurement.

40.16 The cor. of secs. 7, 8, 17 and 18, is monumented with a sandstone, 18x8x5 ins. (record 16x12x6 ins.), 4 notches plainly visible on the S. face, firmly set and with a low mound of stone to the NW.

Dependent Resurvey of a Portion of
the Subdivision of T. 16 S., R. 11 E.

CHAINS

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground with the orig. stone buried alongside in a collar of stone, with brass cap mkd.

T16S R11E
S7|S8
S18|S17
1969

Land, rolling and broken.
Soil, rocky clay.
No timber.
Undergrowth, low brush and grass.

Beginning at the cor. of secs. 8, 9, 16 and 17.

S. 89° 05' W., bet. secs. 8 and 17.

Over rocky, broken land through low brush and grass.

- 3.40 Desc. 40 ft. over W. slope.
- 7.80 Bottom of draw, drains S., irregularly; asc. 50 ft. over E. slope.
- 12.10 End ascent.
- 21.90 Graded dirt road, bears N. 18° W. and S. 18° E., irregularly.
- 27.30 Powerline, bears N. 6° 30' W. and S. 6° 30' E.
- 40.00 Draw, drains S.
- 40.20 Point for the ½ sec. cor. of secs. 8 and 17 at proportionate distance. No evidence of the orig. cor. remains.

Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground in a mound of stone, 4 ft. base to top, with brass cap mkd.,

T16S R11E
½ — S8
S17
1969

The cor. is located on the E. slope of a spur projecting to the S., irregularly.

- 41.00 Wash, 50 lks. wide, 10 ft. deep, drains S. 10° W., irregularly.
- 73.00 Wash, 60 lks. wide, 25 ft. deep, drains S. 30° E., irregularly.
- 80.40 The cor. of secs. 7, 8, 17 and 18.

Dependent Resurvey of a Portion of
the Subdivision of T. 16 S., R. 11 E.

CHAINS

Land, rolling and broken.
Soil, rocky clay.
No timber.
Undergrowth, low brush and grass.

N. 89° 27' W., bet. secs. 7 and 18.

Over rolling and broken land through low brush and grass.

19.30 Fence, bears N. 30° E. and S. 30° W.

20.32 Point for the E1/16 cor. of secs. 7 and 18.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T16S R11E
E1/16 $\frac{S7}{S18}$
1969

No accessories available.

24.80 Trail road, bears N. 15° E. and S. 15° W.; enter cultivated land.

40.64 Point for the ¼ sec. cor. of secs. 7 and 18 at proportionate distance. No evidence of the orig. cor. remains.

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground in a collar of stone, with brass cap mkd.,

T16S R11E
¼ $\frac{S7}{S18}$
1969

The cor. is located on the W. edge of a cultivated field.

Continue over cultivated land.

78.44 Fence, bears N. 0° 21' E. and S. 0° 21' W., leave cultivated land.

78.48 The cor. of secs. 7, 12, 13 and 18 on the W. bdy. of the township, marked by an iron post, 2½ ins. diam., projecting 6 ins. above ground with a 6 ft. steel fence post set alongside, with brass cap mkd.,

T16S
R10E R11E
 $\frac{S12|S7}{S13|S18}$
1969

Land, nearly level.
Soil, clay.
No timber.
Undergrowth, low brush and grass.

Dependent Resurvey of a Portion of
the Subdivision of T. 16 S., R. 11 E.

CHAINS

Beginning at the cor. of secs. 7, 8, 17 and 18.

N. 0° 41' W., bet. secs. 7 and 8.

Over rolling and broken land through low brush and grass.

- 9.00 Trail road, bears N. 70° E. and S. 70° W., irregularly.
- 40.22 Point for the $\frac{1}{2}$ sec. cor. of secs. 7 and 8 at proportionate distance. No evidence of the orig. cor. remains.
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.,

T16S R11E

$\frac{1}{2}$
S7|S8

1969

Set a juniper post, 4 ins. diam., 3 ft. above ground, alongside the cor.

- 54.40 Trail road, bears N. 45° E. and S. 30° W., irregularly.
- 59.00 Enter cultivated land.
- 60.33 Point for the N1/16 cor. of secs. 7 and 8.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T16S R11E

N1/16
S7|S8

1969

Set a 6 ft. steel fence post alongside the cor.

- 80.44 The cor. of secs. 5, 6, 7 and 8, is monumented with a juniper fence post, 6 ins. diam., 5 ft. above the ground and a small mound of stones foreign to the area which are set around the base of the post.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground in a cedar of stone, with brass cap mkd.,

T16S R11E

S6|S5
S7|S8

1969

Set the fence post alongside the cor.

Land, nearly level and cultivated.
Soil, clay.
No timber.
No undergrowth.

Dependent Resurvey of a Portion of the
Subdivision of T. 16 S., R. 11 E.

141

CHAINS

From this cor., the point for the cor. of secs. 1, 6, 7 and 12, on the W. bdy., bears N. 89° 34' W., 77.82 chs., not monumented. This line was run for verification only.

Reestablishment of the Survey Executed
by J. T. Breckon in 1895.

Beginning at the cor. of secs. 4, 5, 8 and 9.

S. 88° 38' W., bet. secs. 5 and 8.

Over rolling land through low brush and grass.

- 16.00 Wash, drains N.
- 26.00 Wash, drains N. 30° E.
- 40.17 Point for the $\frac{1}{4}$ sec. cor. of secs. 5 and 8 at proportionate distance. No evidence of the orig. cor. remains
Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground in a collar of stone, with brass cap mkd.
- T16S R11E
 $\frac{1}{4}$ $\frac{S5}{S8}$
1969
- 43.80 Trail road, bears N. and S., irregularly.
- 52.60 Graded dirt road, bears N. 34° W. and S. 34° E.
- 58.09 Graded dirt road, bears N. and S. 1.00 ch.; thence S. 50° W.
- 58.90 Powerline, bears N. 36° W. and S. 26° E.
- 60.255 Point for the W1/16 cor. of secs. 5 and 8.
Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground in a collar of stone, with brass cap mkd.
- T16S R11E
W1/16 $\frac{S5}{S8}$
1969
- 65.00 Enter swamp.
- 71.10 Leave swamp, enter cultivated land.
- 80.34 The cor. of secs. 5, 6, 7 and 8.
Land, cultivated.
Soil, clay.
No timber.
No undergrowth.

Dependent Resurvey of a Portion of
the Subdivision of T. 16 S., R. 11 E.

CHAINS

- N. 0° 01' W., bet. secs. 5 and 6.
Over nearly level cultivated land.
- 4.60 Leave cultivated land.
- 18.80 Trail road, bears N. 35° E. and S. 35° W., irregularly.
- 33.90 Powerline, bears N. 34° 45' W. and S. 31° 00' E.
- 34.60 Graded dirt road, bears N. 34° 45' W. and S. 31° 00' E.;
asc. 25 ft. on S. slope.
- 40.16 Point for the $\frac{1}{2}$ sec. cor. of secs. 5 and 6 at propor-
tionate distance. No evidence of the orig. cor. remains.
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins.
in the ground in a collar of stone, with brass cap mkd.,

T16S R11E

$$\frac{1}{2}$$

S6	S5
----	----

1969

- Continue over rolling land through low brush and grass.
- 40.82 Desc. 40 ft. over NW. slope.
- 44.80 Base of slope.
- 49.90 Wash, 50 lks. wide, 15 ft. deep, drains N. 70° E.,
irregularly.
- 53.20 Wash, 70 lks. wide, 10 ft. deep, drains S. 80° E.
- 56.40 Trail road, bears E. and W., irregularly.
- 57.10 Enter cultivated land.
- 67.90 Graded dirt road, bears N. 40° E., 3.50 chs.; thence
N. and S. 40° W.
- 78.10 Fence, bears E. and W., leave cultivated land.
- 78.76 The closing cor. of secs. 5 and 6 is monumented with a
sandstone, 18x12x10 ins., plainly mkd. 5 notches on the
E. face, 1 notch on the W. face and C.C. on the N. face.
Destroy the orig. markings on the stone and mark A.M. on
the S. face.
- 79.01 Intersect the Third Standard Parallel South on the S.
bdy. of sec. 31, T. 15 S., R. 11 E. Point for the
closing corner of secs. 5 and 6 at proportionate
distance, longitudinally.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T15S R11E

S31	
S6	S5
C C	

T16S R11E

1969

Dependent Resurvey of a Portion of
the Subdivision of T. 16 S., R. 11 E.

CHAINS

Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, to the North.

The standard cor. of secs. 31 and 32, T. 15 S., R. 11 E., an iron post, $2\frac{1}{2}$ ins. diam., mkd., set and witnessed as previously described, bears S. $89^{\circ} 59'$ E., 2.55 chs. from the above corner.

Land, rolling.

Soil, clay.

No timber.

Undergrowth, low brush and grass.

Point for the $\frac{1}{4}$ sec. cor. of sec. 5 on the N. bdy. of the township, at midpoint bet. the C.C. of secs. 4 and 5 and the C.C. of secs. 5 and 6.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T15S
 $\frac{1}{4}$ S5
T16S R11E
1969

Set a juniper post, 3 ins. diam., 4 ft. remaining above ground alongside the corner.

A fence that bears E. and W., bears N. 14 lks. from the corner.

The standard $\frac{1}{4}$ sec. cor. of sec. 32, T. 15 S., R. 11 E., an iron post, $2\frac{1}{2}$ ins. diam., set, mkd. and witnessed as previously described in this record, bears S. $89^{\circ} 59'$ E., 2.79 chs.

Point for the $\frac{1}{4}$ sec. cor. of sec. 6 on the N. bdy. of the township at proportionate distance between the C.C. of secs. 5 and 6 and the standard Tp. cor. of Tps. 15 and 16 S., Rs. 10 and 11 E., which was not remonumented since this line was run for control only and the point falls in private property.

General Description

The general elevation of the township varies from about 5,000 feet to 6,000 feet above sea level. The land in this township is mostly rolling and broken, covered with low brush and grass. The southeastern portion is broken ledges and canyons covered with scattered scrub juniper and pinon, none suitable for bearing trees.

The Price River runs southerly through secs. 1, 12, 13 and 24 and leaves the township in the north half of sec. 24. There are some scattered cottonwood trees along the river bank. Olsen Reservoir, a small irrigation reservoir, is located in the west portion of sec. 4.

Dependent Resurvey of a Portion of
the Subdivision of T. 16 S., R. 11 E.

CHAINS

The soil in the township is mostly rocky clay except in the western portion of the township that generally follows the Desert Lake North Ditch; the soil here is clay. There is some cultivated land in the northwestern portion of the township.

A considerable amount of mineral prospecting appears to have recently taken place in the southeastern portion of the township.

The township is accessible by improved dirt roads entering from secs. 6, 12 and 31, and by numerous trail roads located throughout the township.

CERTIFICATE OF SURVEY

Craig P. Sylvester

, HEREBY

CERTIFY upon honor that, in pursuance of special instructions bearing date of the 4th day of April, 1969, (I) (ME) have dependently resurveyed the Third Standard Parallel South through R. 11 E., the south and east boundaries and subdivisional lines of T. 16 S., R. 11 E.

of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by (me), (ME) and under (my) (ME) direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

March 5, 1970
(Date)

Craig P. Sylvester
(Cadastral Surveyor)
Supervisory

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

SUBMITTED FOR APPROVAL
Date MAR 16 1971

BUREAU OF LAND MANAGEMENT
Washington, D.C.

The foregoing field notes of the dependent resurvey of the Third Standard Parallel South through R. 11 E., the south and east boundaries and a portion of the subdivisional lines of T. 16 S., R. 11 E., Salt Lake Meridian, Utah

executed by Craig P. Sylvester, Supervisory Cadastral Surveyor having been critically examined and found correct, are hereby approved.

JUN 2 1971
(Date)

Clark F. Gunn
(Chief, Division of Cadastral Survey)

CERTIFICATE OF TRANSCRIPT

~~I Certify That the foregoing transcript of the field notes of the above described surveys in~~
~~is a true copy of the original field notes.~~

~~(Date)~~

~~(Chief, Division of Cadastral Survey)~~

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
ORIGINAL

117

FIELD NOTES

OF THE
DEPENDENT RESURVEY

OF

THE EAST 3 MILES OF THE SOUTH BOUNDARY

THE SOUTH 2 MILES OF THE EAST BOUNDARY

THE NORTH 2 MILES OF THE SECOND GUIDE MERIDIAN EAST THROUGH T. 17 S.

AND

A PORTION OF THE SUBDIVISION

OF

TOWNSHIP 17 SOUTH, RANGE 9 EAST

Of the SALT LAKE

In the State of UTAH

DEPT. OF INTERIOR
BUREAU OF LAND MGMT.

71
JUN 21 PM 2:50

RECEIVED
STATE & LAND OFFICE
SALT LAKE CITY, UTAH

EXECUTED BY

Craig P. Sylvester

Supervisory Cadastral Surveyor

Under special instructions dated April 4, 19 69, which provided for the surveys
included under Group Number 506, approved April 22, 1969,
and assignment instructions dated June 2, 19 69.

Survey commenced December 10, 19 69

Survey completed February 27, 19 70

BOOK 11 557

INDEX DIAGRAM

Township 17 SOUTH, Range 9 EAST

9 6 43	8 37	4 32	8 27	2	1
42	42	36	31		
8 7 40	8 35	9 29	10 26	11	12
39	38	33	28		
18	17	16	15 25	14 20	13
19	20	21 25	22 24	18 23 14	24 13
30	29	28 23	27 16 22	26 12 16	25 6 12
31	32	33 21	34 15 2	35 11 3	36 5 4

Dependent Resurvey in T. 17 S., R. 9 E., Salt Lake Meridian, Utah

CHAINS

The north, south and east boundaries of Township 17 South, Range 9 East and the Second Guide Meridian East through Township 17 South, were surveyed by A. D. Ferron in 1873. The subdivisional lines were surveyed by A. D. Ferron in 1880. The north and east boundaries and the Second Guide Meridian East through Township 17 South were resurveyed by A. D. Ferron in 1880. The Second Guide Meridian East through Township 17 South was retraced by J. C. Dick in 1900. The north boundary was resurveyed by J. C. Clark in 1940.

The following field notes are those of the dependent resurvey of the east 3 miles of the south boundary, the south 2 miles of the east boundary, the north 2 miles of the Second Guide Meridian East through Township 17 South and a portion of the subdivision of Township 17 South, Range 9 East. The resurvey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1947, and Special Instructions for Group No. 506, Utah dated April 4, 1969.

Before restoring the corners, the lines of the original survey were retraced and diligent search made for any evidence of the original corner, bearing trees or other calls of the original field note record.

The rules of proportionate measurement were applied to ascertain the position of the lost corners, but not until exhausting every reasonable possibility of finding direct evidence for the control of each particular corner.

The direction of all lines were determined by observations on the sun, and carried forward by sustained angulation, and the distances were determined by chaining where possible; otherwise, by triangulation. The details of such triangulations have been thoroughly verified and in order to simplify the record the diagrams and reductions are omitted from these field notes.

The geographic position of the southeast corner of the township at U. S. Geological triangulation station, is at Latitude $39^{\circ} 17' 40.263''$ N. and Longitude $110^{\circ} 51' 0.82''$ W.

The magnetic declination was read at a number of stations throughout the survey and the average of these readings was found to be $15^{\circ} 30'$ E.

Dependent Resurvey of the East 3 Miles of the South Boundary, Township 17 South, Range 9 East

Reestablishment of the Survey Executed by A. D. Ferron, Deputy Surveyor, in 1873.

Dependent Resurvey, S. Bdy., T. 17 S., R. 9 E.

CHAINS

From the cor. of secs. 3, 4, 33 and 34, on the S. bdy. of the Tp., marked by a mound of stone foreign to the area in a fence bearing N. and S. This position is accepted as the best existing evidence of the position of the orig. cor.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins. in the ground and in a collar of stone, with brass cap mkd.

T17S R9E
S33|S34
 S4|S3
 T18S R9E
 1969

N. $89^{\circ} 11'$ E., bet. secs. 3 and 34.

Over benchland, through shadscale and salt grass.

Asc. 105 ft. over W. slope.

- 7.25 Improved gravel road, bears N. and S.; leave valley and enter gently rolling hills.
- 32.80 Small canal, drains irregularly S. 25° W.
- 40.22 The $\frac{1}{4}$ sec. cor. of secs. 3 and 34, monumented with a sandstone, $8 \times 7 \times 4$ ins., firmly set and plainly mkd. $\frac{1}{2}$ on N. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground and in a collar of stone, with brass cap mkd.

T17S R9E
 $\frac{1}{2}$ S34
 S3
 T18S R9E
 1969

Deposit the found stone cor. alongside the iron post.

N. $89^{\circ} 31'$ E., beginning new measurement.

Asc. 20 ft. over gentle W. slope.

- 1.85 Improved gravel road, bears S. and N. about 4.50 chs. to intersection.
- 9.50 Improved gravel road, bears N. $58^{\circ} 30'$ W. and S. $58^{\circ} 30'$ E.
- 31.85 Top of asc.; desc. 55 ft. over gentle E. slope.

Dependent Resurvey, S. Bdy., T. 17 S., R. 9 E.

CHAINS

40.53

Point for the corner of secs. 2, 3, 34 and 35, at proportionate distance. There is no remaining evidence of the orig. cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T17S R9E
S34 | S35
 S3 | S2
 T18S R9E
 1969

Raise a mound of stone, 3 ft. base, 2½ ft. high N. of cor.

Deposit glass at the base of the iron post.

Land, gently rolling.

Soil, sandy clay.

No timber.

Undergrowth, shadscale and salt grass.

N. 89° 31' E., bet. secs. 2 and 35.

Over gently rolling hills, through shadscale and salt grass.

Asc. 25 ft. along gentle S. slope.

19.65

Small spur, slopes S. 10° W.

34.15

Small spur, slopes S.; desc. 25 ft. along gentle S. slope.

40.53

The ¼ sec. cor. of secs. 2 and 35, marked by a cobblestone, 8x5x4 ins., foreign to the area, firmly set and dimly mkd. ¼ on N. face and fits the calls of the field (record - a sandstone 12x9x6 ins.).

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T17S R9E
 ¼ S35
 S2
 T18S R9E
 1969

Deposit the found stone cor. alongside the iron post.

Set a steel fence post, 6 ft. long, 2 ft. in the ground alongside the iron post.

N. 89° 13' E., beginning new measurement.

Desc. 10 ft. over gentle SE. slope.

152

Dependent Resurvey, S. Bdy., T. 17 S., R. 9 E.

CHAINS

- 7.30 Small wash, drains irregularly S.
- 21.60 Main wash, 20 lks. wide, 4 ft. deep, drains S. 51° W.; asc. 35 ft. over gentle SW. slope.
- 40.19 The cor. of secs. 1, 2, 35 and 36, monumented with a cobblestone, 12x8x4 ins., firmly set and plainly mkd. 1 notch on E. and 5 notches on W. edges (record - a sandstone, 12x9x7 ins.).

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone, with brass cap mkd.

T17S R9E
 $\frac{S35}{S2} | \frac{S36}{S1}$
 T18S R9E
 1969

Deposit the stone cor. alongside the iron post.

Land, gently rolling hills.
 Soil, sandy clay.
 No timber.
 Undergrowth, shadscale and salt grass.

- N. 89° 23' E., bet. secs. 1 and 36.
- Over broken benchland, through shadscale and salt grass.
- Asc. 160 ft. over W. slope.
- 30.55 Ridge, projects N.; desc. 80 ft. over E. slope.
- 40.05 Wash, 20 lks. wide, 3 ft. deep, drains N.
- 40.17 Point for the ¼ sec. cor. of secs. 1 and 36, at proportionate distance. There is no remaining evidence of the orig. cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone, with brass cap mkd.

T17S R9E
 $\frac{1}{4} \frac{S36}{S1}$
 T18S R9E
 1969

Set a steel fence post, 6 ft. long, 2 ft. in the ground alongside the iron post.

Cor. is located on the E. edge of a small wash which drains N.

Asc. 50 ft. over W. slope.

Dependent Resurvey, S. Bdy., T. 17 S., R. 9 E.

CHAINS

- 49.60 Top of asc.; desc. 5 ft. along N. slope.
- 52.90 Trail road, bears N. 30° E. and S. 20° W. on a curve.
- 80.34 The cor. of Tps. 17 and 18 S., Rs. 9 and 10 E., monumented with a sandstone, 84x4x4 ins., firmly set and plainly mkd. 6 notches on all 4 edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T17S
R9E R10E
S36 | S31
S1 | S6
T18S
1969

Deposit the stone cor. alongside the iron post.

Raise a mound of stone, 2 ft. base, 1½ ft. high, E. of cor.

This cor. is a U.S.G.S. triangulation station "Sec. cor. 36/17S/9E" at Latitude 39° 17' 40.263" N. and Longitude 110° 51' 02.082" W.

Land, gently rolling hills.

Soil, sandy clay.

No timber.

Undergrowth, shadscale and salt grass.

Dependent Resurvey of the South 2 Miles of the East Boundary, Township 17 South, Range 9 East

Reestablishment of the Resurvey Executed by A. D. Ferron, Deputy Surveyor, in 1880.

From the cor. of Tps. 17 and 18 S., Rs. 9 and 10 E.

N. 0° 31' W., bet. secs. 31 and 36.

Over gently rolling hills, through shadscale and salt grass.

Asc. 30 ft. over gentle S. slope.

13.00 Draw, drains irregularly S. 15° E.

40.33 The ½ sec. cor. of secs. 31 and 36, monumented with a sandstone, 12x8x6 ins., firmly set and plainly mkd. ½ on W. face.

At the cor. point

Dependent Resurvey, S. Bdy., T. 17 S., R. 9 E.

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T17S
R9E R10E
 $\frac{1}{2}$
S36|S31
1969

Deposit the stone cor. alongside the iron post.

Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

N. $0^{\circ} 42'$ W., beginning new measurement.

Desc. 50 ft. over gentle N. slope.

- 8.25 Trail road, bears N. 45° E. and S. 45° W. on a curve.
- 25.00 Wash, 30 lks. wide, 4 ft. deep, drains N. 57° W.
- 40.60 The cor. of secs. 25, 30, 31 and 36, monumented with a sandstone, $7 \times 5 \times 3$ ins., loosely set and plainly mkd. 1 notch on S. and 5 notches on N. edges.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T17S
R9E R10E
S25|S30
S36|S31
1969

Deposit the stone cor. alongside the iron post.

Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.

Land, gently rolling hills.
Soil, shale and clay.
No timber.
Undergrowth, shadscale and salt grass.

N. $0^{\circ} 23'$ W., bet. secs. 25 and 30.

Over gently rolling hills, through shadscale and salt grass.

Asc. 95 ft. over S. slope.

- 1.75 Fence, bears N. $17^{\circ} 30'$ W. and S. $17^{\circ} 30'$ E.

Dependent Resurvey, E. Bdy., T. 17 S., R. 9 E.

CHAINS

- 15.00 Top of asc.; desc. 50 ft. over N. slope.
- 34.05 Wash, 20 lks. wide, 3 ft. deep, drains irregularly N. 63° W.
- 40.05 The ¼ sec. cor. of secs. 25 and 30, monumented with a sandstone, 6x5x5 ins., firmly set and plainly mkd. ¼ on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone, with brass cap mkd.

T17S
R9E R10E
¼
S25|S30
1969

Deposit the stone cor. alongside the iron post.

N. 0° 08' E., beginning new measurement.

Asc. 15 ft. over S. slope.

- 7.10 Small spur, slopes NW.; desc. 85 ft. over N. slope.
- 31.25 Wash, 30 lks. wide, 4 ft. deep, drains irregularly N. 71° W.
- 39.88 The cor. of secs. 19, 24, 25 and 30, monumented with a sandstone, 12x10x6 ins., loosely set and dimly mkd. 2 notches on S. and 4 notches on N. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, with brass cap mkd.

T17S
R9E R10E
S24|S19
S25|S30
1969

Deposit the stone cor. alongside the iron post.

Cor. is located in a fence bearing E. and W.

Land, gently rolling hills.

Soil, shale and clay.

No timber.

Undergrowth, shadscale and salt grass.

Dependent Resurvey of the North 2 Miles of the
Second Guide Meridian East, Through Township 17
South.

Dependent Resurvey, E. Bdy., T. 17 S., R. 9 E.

CHAINS

Reestablishment of the Retracement Executed
by J. C. Dick in 1900.

Point for the cor. of secs. 7, 12, 13 and 18, on the W. bdy. of the Tp., determined by the cor. of fences bearing N., S. and W. This is the position for the cor. according to the statement of Cliff Brown, an interested land owner; it is accepted as the best evidence of the position of the orig. cor.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T17S
R8E R9E
S12 S7
S13 S18
1970

N. $0^{\circ} 24'$ W., bet. secs. 7 and 12.

Over nearly level farm land.

Asc. 45 ft. over gentle S. slope, along fence and powerline.

- 11.95 Trail road, bears irregularly N. 45° W. and S. 45° E.
- 12.60 Canal, flows S. 40° E.; enter clay hills.
- 16.50 Small clay spur, projects SW.; thence along gentle W. slope.
- 29.85 Cor. of fences, bearing S. and W.
- 33.80 Enter farm land.
- 40.34 Point for the $\frac{1}{2}$ sec. cor. of secs. 7 and 12, at proportionate distance. There is no remaining evidence of the orig. cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T17S
R8E R9E
$\frac{1}{2}$
S12 S7
1970

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.

- 45.40 Enter clay hills; asc. 70 ft. over S. slope. Continue along W. side of powerline.
- 46.70 S. end of fence, bearing N.; thence along fence.
- 48.60 Canal, flows irregularly E.

Dependent Resurvey, W. Bdy., T. 17 S., R. 9 E.

CHAINS	
55.50	Top of narrow clay spur, slopes W.; desc. 40 ft. over NW. slope.
59.50	Bottom of hollow, drains W.; thence along bottom.
60.51	Point for the N1/16 sec. cor. of secs. 7 and 12. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">T17S R8E R9E N1/16 S12 S7 1970</p>
61.15	Cor. of fences, bearing S., E. and NW.; asc. 30 ft. over S. slope.
63.30	Top of narrow spur, slopes W.; desc. 25 ft. over N. slope.
68.00	Trail road, bears N. 70° E. and S. 70° W.; thence along gentle W. slope.
80.00	Base of clay ridge, bears E. and W.; asc. 55 ft. over steep S. slope.
80.68	The cor. of secs. 1, 6, 7 and 12, monumented with a sandstone, 8x6x4 ins., firmly set and plainly mkd. 1 notch on N. and 5 notches on S. edges.
	<p>At the cor. point</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;">T17S R8E R9E <u>S1 S6</u> S12 S7 1970</p>
	Deposit the stone cor. alongside the iron post.
	Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.
	<p>Land, nearly level to gently rolling. Soil, clay. No timber. Undergrowth, shadscale and salt grass.</p>
	N. 0° 23' W., bet. secs. 1 and 6.
	Over gently rolling clay hills, through shadscale and salt grass.
	Asc. 25 ft. over steep S. slope along powerline.
1.35	Top of ridge, bears NW. and SE.; desc. 10 ft. over gentle N. slope.
8.20	Bulldozed road, bears irregularly NW. and SE.

CHAINS

- 16.66 Trail road, bears irregularly N. 45° W. and S. 45° E.
- 37.30 Wash, 40 lks. wide, 15 ft. deep, drains irregularly S. 45° E.; asc. 10 ft. over gentle S. slope.
- 40.60 The $\frac{1}{2}$ sec. cor. of secs. 1 and 6, monumented with a sandstone, 8x6x4 ins., firmly set and plainly mkd. $\frac{1}{2}$ on W. face.
- At the cor. point
- Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 20 ins. in the ground and in a collar of stone, with brass cap mkd.
- T17S
R8E R9E
 $\frac{1}{2}$
S1|S6
1970
- Deposit the stone cor. alongside the iron post.
- Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.
-
- N. 0° 21' W., beginning new measurement.
- Asc. 100 ft. over S. slope.
- 11.00 Draw, drains S. 15° E.
- 15.50 Spur, slopes W.; desc. 25 ft. over NW. slope.
- 17.00 Draw, drains W.; asc. 35 ft. over SW. slope.
- 19.30 Top of bench, bears NW. and SE.; desc. 20 ft. over NW. slope.
- 31.90 Wash, 10 lks. wide, 3 ft. deep, drains S. 45° E.; asc. 30 ft. over SW. slope.
- 33.40 Top of asc.; thence over nearly level land.
- 40.29 The cor. of Tps. 16 and 17 S., Rs. 8 and 9 E., monumented with an iron post, 3 ins. diam., firmly set and protruding 6 ins. above ground, with brass cap marked and witnessed as described in the official record of the 1940 resurvey by J. C. Clark.
- Land, gently rolling.
Soil, clay.
No timber.
Undergrowth, shadscale and salt grass.

Dependent Resurvey of a Portion of the Subdivision
of Township 17 South, Range 9 East

Reestablishment of the Survey Executed
by A. D. Ferron, Deputy Surveyor, in 1880.

Dependent Resurvey, T. 17 S., R. 9 E.

CHAINS

From the cor. of secs. 1, 2, 35 and 36 on the S. bdy. of the Tp.

N. 0° 27' W., bet. secs. 35 and 36.

Over gently rolling land, through shadscale and salt grass.

Desc. 35 ft. over gentle NW. slope.

17.50 Wash, 20 lks. wide, 6 ft. deep, drains S. 50° W. from N. 10° E.; asc. 25 ft. over S. slope.

38.00 Wash, 20 lks. wide, 3 ft. deep, drains S. 60° E.

39.75 The $\frac{1}{2}$ sec. cor. of secs. 35 and 36, monumented with a cobblestone, 8x5x4 ins., firmly set and plainly mkd. $\frac{1}{2}$ on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd.

T17S R9E

S35|S36

1969

Deposit the stone cor. alongside the iron post.

N. 0° 47' W., beginning new measurement.

Asc. 60 ft. over S. slope.

19.40 Main wash, drains S. 20° E. from N. 60° W.

40.25 Point for the cor. of secs. 25, 26, 35 and 35 at proportionate distance. There is no remaining evidence of the orig. cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T17S R9E

S26|S25

S35|S36

1969

Cor. is located on W. side of wash.

Land, gently rolling.

Soil, clay.

No timber.

Undergrowth, shadscale and salt grass.

From the cor. of secs. 25, 30, 31 and 36, on the E. bdy. of the Tp.

Dependent Resurvey, T. 17 S., R. 9 E.

CHAINS

S. 89° 07' W., bet. secs. 25 and 36.

Over rolling land, through shadscale and salt grass.

Desc. 70 ft. over SW. slope.

1.50 Wash, 20 lks. wide, 5 ft. deep, drains S. 10° W.

39.92 The $\frac{1}{2}$ sec. cor. of secs. 25 and 36, monumented with a cobblestone, 10x5x5 ins., firmly set and plainly mkd. $\frac{1}{2}$ on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 22 ins. in the ground and in a collar of stone, with brass cap mkd.

T17S R9E

$\frac{1}{2}$ — S25
S36

1969

Deposit the stone cor. alongside the iron post.

S. 88° 28' W., beginning new measurement.

Desc. 50 ft. over W. slope.

20.00 Wash, 30 lks. wide, 4 ft. deep, drains S. 10° W.

23.15 Wash, 30 lks. wide, 6 ft. deep, drains irregularly S.

40.00 Wash, 20 lks. wide, 4 ft. deep, drains S. 15° E.

40.44 The cor. of secs. 25, 26, 35 and 36.

Land, rolling.

Soil, clay.

No timber.

Undergrowth, shadscale and salt grass.

N. 0° 21' W., bet. secs. 25 and 26.

Over gently rolling land, through shadscale and salt grass.

Asc. 40 ft. over general S. slope over series of small gullies.

.75 Wash, 20 lks. wide, 3 ft. deep, drains S. 15° E.

30.00 Fence, bears N. 81° E. and S. 81° W.

33.45 Top of asc.; desc. 30 ft. over gentle N. slope.

40.25 The $\frac{1}{2}$ sec. cor. of secs. 25 and 26, monumented with a cobblestone, 10x6x4 ins., firmly set and plainly mkd. $\frac{1}{2}$ on W. face.

At the cor. point

Dependent Resurvey, T. 17 S., R. 9 E.

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T17S R9E

 $\frac{1}{2}$
 S26|S25

1969

Deposit the stone cor. alongside the iron post.

Deposit broken glass at base of iron post.

N. 0° 46' W., beginning new measurement.

Desc. 25 ft. over gentle N. slope.

20.19 Point for the N1/16 sec. cor. of secs. 25 and 26.

Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd.

T17S R9E

 N1/16
 S26|S25

1969

Desc. 25 ft. over gentle N. slope.

28.80 Improved gravel road, bears irregularly E. and W.

30.60 Telephone line, bears E. and W.

31.80 Small canal, drains irregularly E.

40.38 The cor. of secs. 23, 24, 25 and 26, determined by the center of a lane, bearing N. and S., and in line with the extension of a fence to the W.; it is accepted as the best available evidence of the position of the orig. cor.

At the cor. point

Bury broken glass, 12 ins. deep, in lane.

From which,

An iron post, 30 ins. long, 2½ ins. diam., set 24 ins. in the ground for a reference monument, bears N. 39° 40' E., 36 lks. dist., with brass cap mkd. T17S R9E RM S24 24 FT 1969 and an arrow pointing to the true cor. point.

An iron post, 30 ins. long, 2½ ins. diam., set 24 ins. in the ground, for a reference monument, bears S. 44° 50' E., 33 lks. dist., with brass cap mkd. T17S R9E S25 22 FT RM 1969 and an arrow pointing to the true cor. point.

Land, gently rolling.

Soil, clay.

No timber.

Undergrowth, shadscale and salt grass.

From the cor. of secs. 19, 24, 25 and 30 on the E. bdy. of the Tp.

S. 89° 19' W., bet. secs. 24 and 25.

Over gently rolling land, through shadscale and salt grass.

Desc. 20 ft. over gentle W. slope along fence line.

Dependent Resurvey, T. 17 S., R. 9 E.

40.49

The 1/2 sec. cor. of secs. 24 and 25, determined by the center of a lane, bearing N., and in line with the extension of a fence to the W. which is accepted as the best available evidence of the position of the orig. cor. An improved gravel road, bears N. 70° 30' E., and S. 70° 30' W.

At the cor. point

Bury broken glass, 12 ins. deep, in the ground.

From which,

An iron post, 30 ins. long, 2 1/2 ins. diam., set 24 ins. in the ground, for a reference monument, bears S. 45° 30' E., 50 lks. dist., with brass cap mkd. T17S R9E 1/2 S25 33FT RM 1969 and an arrow pointing to the true cor. point.

An iron post, 30 ins. long, 2 1/2 ins. diam., set 24 ins. in the ground, for a reference monument, bears S. 18° 15' W., 60 lks. dist., with brass cap mkd. T17S R9E RM 1/2 S25 39.5FT 1969 and an arrow pointing to the true cor. point.

S. 89° 12' W., beginning new measurement.

Over nearly level land.

10.15 Small canal, drains irregularly N. 61° E.

40.19 Fence, bears N. and S.

40.44 The cor. of secs. 23, 24, 25 and 26.

Land, gently rolling to nearly level.

Soil, clay.

No timber.

Undergrowth, shadscale and salt grass.

N. 0° 47' W., bet. secs. 23 and 24.

Over level land, along an old farm lane which is no longer in use.

40.24 The 1/2 sec. cor. of secs. 23 and 24, determined by the center of a lane, bearing N. and S., and in line with the extension of fences to the E. and W. of the lane and is accepted as the best available evidence of the position of the orig. cor.

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 36 ins. in the ground, with brass cap mkd.

T17S R9E

1/2

S23|S24

1969

Set a cottonwood post, alongside the iron post.

N. 0° 32' W., beginning new measurement.

Continue along old farm lane.

Dependent Resurvey, T. 17 S., R. 9 E.

CHAINS

40.82

The cor. of secs. 13, 14, 23 and 24, determined by the intersection of lines, bearing N., S., E. and W., and is accepted as the best available evidence of the position of the orig. cor.

At the cor. point

Bury broken glass, 12 ins. deep, in the ground.

From which,

An iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., set 24 ins. in the ground, for a reference monument, bears S. $35^{\circ} 40'$ W., 41 lks. dist., with brass cap mkd. T17S R9E S23 27 FT RM 1969 and an arrow pointing to the true cor. point.

An iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., set 24 ins. in the ground, for a reference monument, bears N. $39^{\circ} 10'$ W., 36 lks. dist., with brass cap mkd. T17S R9E S14 24FT RM 1969 and an arrow pointing to the true cor. point.

Land, level.

Soil, clay.

No timber, or undergrowth.

From the cor. of secs. 2, 3, 34 and 35, on the S. bdy. of the tp.

N. $0^{\circ} 50'$ W., bet. secs. 34 and 35.

Over broken land, through shadscale and salt grass.

Asc. 140 ft. over S. slope.

14.95

Wash, 20 lks. wide, 3 ft. deep, drains S. 40° E.

38.20

Top of asc.; desc. 40 ft. over N. slope, across a series of small spurs and gullies.

40.38

The $\frac{1}{2}$ sec. cor. of secs. 34 and 35, monumented with a sandstone, 14x10x5 ins., firmly set and plainly mkd. $\frac{1}{2}$ on W. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T17S R9E

$\frac{1}{2}$

S34|S35

1969

Deposit the stone cor. alongside the iron post.

Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

Cor. is located in a small ravine, draining W.

N. $0^{\circ} 31'$ W., beginning new measurement.

Continue across small spurs and gullies.

40.11

The cor. of secs. 26, 27, 34 and 35, monumented with a cobblestone, 12x8x4 ins., firmly set and plainly mkd. 1 notch on S. and 2 notches on E. edges.

At the cor. point

STATE OF NEW YORK

IN SENATE
January 12, 1910.

REPORT
OF THE
COMMISSIONERS OF THE
LAND OFFICE.

ALBANY: JAMES BROWN PUBLISHER, 1910.

PRINTED BY THE STATE PRINTING OFFICE.

ALBANY: JAMES BROWN PUBLISHER, 1910.

ALBANY:

JAMES BROWN

PUBLISHER

1910

ALBANY: JAMES BROWN PUBLISHER, 1910.

ALBANY: JAMES BROWN PUBLISHER, 1910.

ALBANY: JAMES BROWN

ALBANY: JAMES BROWN PUBLISHER, 1910.

ALBANY: JAMES BROWN PUBLISHER, 1910.

ALBANY: JAMES BROWN PUBLISHER, 1910.

ALBANY: JAMES BROWN

ALBANY: JAMES BROWN

ALBANY: JAMES BROWN PUBLISHER, 1910.

Dependent Resurvey, T. 17 S., R. 9 E.

CHAINS

- .50 Spur, slopes W.
- 14.40 Spur, slopes W.
- 20.00 Fence, bears N. 89° 30' E. and S. 89° 30' W. in a ravine which drains W.
- 22.00 Clay point, projects W.; desc. 170 ft. over N. slope.
- 26.00 Wash, in bottom of cove, drains W.; asc. 75 ft. over S. slope.
- 31.20 Spur, slopes S. 85° W.; desc. 115 ft. along W. slope.
- 39.62 The $\frac{1}{2}$ sec. cor. of secs. 26 and 27, monumented with a cobblestone, 8x5x3 ins., firmly set and plainly mkd. $\frac{1}{2}$ on W. face.
- At the cor. point
- Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.
- T17S R9E
 $\frac{1}{2}$
 S27|S26
 1969
- Deposit the stone cor. alongside the iron post.
-
- N. 0° 41' W., beginning new measurement.
- Asc. 35 ft. along W. slope.
- 4.00 Spur, slopes W.; desc. 20 ft. over N. slope.
- 18.80 Improved gravel road, bears N. 27° 20' E. and S. 27° W. Bottom of desc.; asc. 40 ft. over S. slope.
- 22.75 Telephone line, bears N. 28° 30' E. and S. 28° 30' W.
- 25.35 Top of asc.; desc. 30 ft. over gentle NW. slope.
- 40.78 The cor. of secs. 22, 23, 26 and 27, monumented with a cobblestone, 9x7x5 ins., firmly set and plainly mkd. 2 notches on the S. and E. edges.
- At the cor. point
- Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.
- T17S R9E
S22|S23
 S27|S26
 1969
- Deposit the stone cor. alongside the iron post.
- Land, broken.
 Soil, rocky clay.
 No timber.
 Undergrowth, shadscale and salt grass.

Dependent Resurvey, T. 17 S., R. 9 E.

CHAINS

From the cor. of secs. 23, 24, 25 and 26.

S. 89° 12' W., bet. secs. 23 and 26.

Over level farm land.

- .25 Cor. of fences, bearing N., S. and W.; thence along fence line.
- 25.40 Fence, bears N. 50° W. and S. 50° E.
- 27.20 Small canal, drains irregularly S. 50° E.; enter brush land.
- 27.75 Improved gravel road, bears irregularly N. 50° W. and S. 50° E.
- 29.35 Telephone line, bears N. 50° W. and S. 50° E.
- 40.24 The $\frac{1}{2}$ sec. cor. of secs. 23 and 26, monumented with a cobblestone, 7x5x4 ins., firmly set and plainly mkd. $\frac{1}{2}$ on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T17S R9E

$\frac{1}{2}$ — S23

S26

1969

Deposit the stone cor. alongside the iron post.

S. 89° 55' W., beginning new measurement.

Asc. 40 ft. over gentle E. slope.

- 6.30 Wash, 15 lks. wide, 4 ft. deep, drains N. 48° E.
- 29.05 Improved gravel road, bears N. 27° 20' E. and S. 27° 20' W.
- 30.60 Telephone line, bears N. 28° 30' E. and S. 28° 30' W.
- 40.62 The cor. of secs. 22, 23, 26 and 27.

Land, level to gently rolling.

Soil, clay.

No timber.

Undergrowth, shadscale and salt grass.

N. 0° 26' W., bet. secs. 22 and 23.

Over gently rolling land, through shadscale and salt grass.

Desc. 20 ft. over gentle NE. slope.

Dependent Resurvey, T. 17 S., R. 9 E.

CHAINS

- 1.00 Gully, 10 ft. deep, drains irregularly N. 40° W.
- 39.91 The $\frac{1}{4}$ sec. cor. of secs. 22 and 23, determined latitudinally by the extension of a fence to the E. and longitudinally by proportionate measurement.
- At the cor. point
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground and in a collar of stone, with brass cap mkd.
- T17S R9E
 $\frac{1}{4}$
S22|S23
1969
- Cor. is located 30 lks. W. of the intersection of a gravel road, bearing N. and E.
-
- N. 0° 26' W., beginning new measurement.
- Desc. 25 ft. along gentle E. slope, along W. edge of gravel road.
- 20.37 Point for the N1/16 sec. cor. of secs. 22 and 23.
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground and in a collar of stone, with brass cap mkd.
- T17S R9E
N1/16
S22|S23
1969
- Continue along the W. edge of gravel road.
- 20.60 Trail road, bears W. and E. 30 lks. to gravel road.
- 21.25 Cor. of fences, bearing W. and N.; thence along fence line.
- 31.25 Small canal, drains E.
- 40.74 The cor. of secs. 14, 15, 22 and 23, determined by Cor. of fences, bearing N., S. and W., and in line with a lane to the E.; it is accepted as the best available evidence of the position of the orig. cor.
- At the cor. point
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 28 ins. in the ground, with brass cap mkd.
- T17S R9E
S15|S14
S22|S23
1969

Dependent Resurvey, T. 17 S., R. 9 E.

CHAINS

From this cor., the cor. of secs. 10, 11, 14 and 15, bears N. $0^{\circ} 16' W.$, 80.76 chs. dist., determined by cor. of fences bearing N., S. and E. It is accepted as the best available evidence of the position of the orig. cor.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T17S R9E

S10	S11
S15	S14

1970

Land, gently rolling.

Soil, clay.

No timber.

Undergrowth, shadscale and salt grass.

From the cor. of secs. 13, 14, 23 and 24.

S. $89^{\circ} 21' W.$, bet. secs. 14 and 23.

Over nearly level farm land, along farm lane. Powerline on N. side of lane.

25.40 Paved road, bears S. $40^{\circ} 30' W.$ and N. $40^{\circ} 30' E.$ End of farm lane.

34.05 Powerline, bears S., E. and W.

40.32 The $\frac{1}{2}$ sec. cor. of secs. 14 and 23, determined by center of old farm lane, no longer in use, bearing E. and W., and by the extension of a fence to the S. It is accepted as the best available evidence of the position of the orig. cor.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 27 ins. in the ground, with brass cap mkd.

T17S R9E

$\frac{1}{2}$	S14
	S23

1969

S. $89^{\circ} 14' W.$, beginning new measurement.

Continue over farm land.

39.75 Improved gravel road, bears N. $0^{\circ} 25' W.$ and S. $0^{\circ} 25' E.$

40.23 The cor. of secs. 14, 15, 22 and 23.

Dependent Resurvey, T. 17 S., R. 9 E.

CHAINS

Land, level farm land.
Soil, clay.
No timber or undergrowth.

From the cor. of secs. 3, 4, 33 and 34 on the S. bdy.
of the Tp.

N. 0° 34' W., bet. secs. 33 and 34.

Over level land, through greasewood, along fence line.

19.70 Improved gravel road, bears E. and W.

20.20 Point for the S1/16 sec. cor. of secs. 33 and 34.

Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins.
in the ground, with brass cap mkd.

T17S R9E

S1/16

S33|S34

1969

Continue along fence line.

20.23 Telephone line, bears E. and W.; enter farm land. Cor.
of fences, bearing N., S., E. and W.

40.40 The ¼ sec. cor. of secs. 33 and 34, determined by cor.
of fences, bearing N., S. and W. It is accepted as the
best available evidence of the position of the orig. cor.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T17S R9E

¼

S33|S34

1969

N. 0° 33' W., beginning new measurement.

Continue along fence line.

20.30 Cor. of fences, bearing S., E. and W.

40.60 Drainage ditch, 40 lks. wide, 6 ft. deep, drains S. 89°
08' W.

40.62 Point for the cor. of secs. 27, 28, 33 and 34, determined
longitudinally by the extension of a fence to the N., and
latitudinally 25 lks. (1 rod) S. of a fence bearing E.
and W. and in line with the center of a lane to the W.,
falls in a drainage ditch, which drains W., where a cor.
cannot be perpetuated.

Dependent Resurvey, T. 17 S., R. 9 E.

CHAINS

Land, level farm land.
Soil, clay.
No timber.
Undergrowth, greasewood.

From the cor. of secs. 26, 27, 34 and 35.

S. 89° 50' W., bet. secs. 27 and 34.

Over broken land, through shadscale and salt grass.

Desc. 125 ft. over W. slope.

17.00 Enter gently rolling land; continue to desc. over gentle W. slope.

20.21 Point for the E1/16 sec. cor. of secs. 27 and 34.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone, with brass cap mkd.

T17S R9E
E1/16 — $\frac{S27}{S34}$
1969

Deposit broken glass at base of iron post.

26.25 Small canal, drains irregularly S. 20° E.

34.15 Telephone line, bears N. 21° E. and S. 21° W.

40.42 The ¼ sec. cor. of secs. 27 and 34, monumented with a sandstone, 14x12x8 ins., firmly set and plainly mkd. ¼ on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone, with brass cap mkd.

T17S R9E
¼ — $\frac{S27}{S34}$
1969

Deposit the stone cor. alongside the iron post.

S. 89° 36' W., beginning new measurement.

Over nearly level land.

8.50 Improved gravel road, bears N. 20° 45' E. and S. 20° 45' W.

14.80 Cor. of fences, bearing N. and W.; thence along fence.

Dependent Resurvey, T. 17 S., R. 9 E.

CHAINS

- 19.80 Cor. of fences, bearing S., E. and W.; enter farm land.
- 40.20 Point for the cor. of secs. 27, 28, 33 and 34.
Land, broken in the E. and farm land in the W.
Soil, clay.
No timber.
Undergrowth, shadscale and salt grass.
-
- N. 0° 37' W., bet. secs. 27 and 28.
Over level farm land.
- .25 Point for the witness cor. of secs. 27, 28, 33 and 34,
at the cor. of fences bearing N., E. and W.
Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.
- | | |
|------|-----|
| T17S | R9E |
| S28 | S27 |
| S33 | S34 |
| W | C |
| 1969 | |
- Thence along fence line.
- 29.50 Fence, along irrigation ditch, bears N. 45° E. and S.
45° W. Enter gently rolling brush land; asc. 60 ft.
over S. slope.
- 33.00 Top of asc.; desc. 45 ft. over gentle N. slope.
- 40.20 Point for the ¼ sec. cor. of secs. 27 and 28, at propor-
tionate distance, falls in a road bearing E. and W.
There is no remaining evidence of the orig. cor.
- 40.37 Point for the witness ¼ sec. cor. of secs. 27 and 28,
in a fence, bearing E. and W.
Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.
- | | |
|------|-----|
| T17S | R9E |
| S28 | S27 |
| W | C |
| 1969 | |
- 46.00 Enter farm land.
- 60.00 Fence, bears E. and W.
- 65.00 Enter gently rolling brush land.
- 80.40 The cor. of secs. 21, 22, 27 and 28, monumented with a
sandstone, 12x5x4 ins., firmly set and plainly mkd. 2
notches on S. and 3 notches on E. edges.
At the cor. point

172

Dependent Resurvey, T. 17 S., R. 9 E.

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground and in a collar of stone, with brass cap mkd.

T17S R9E
 $\frac{S21}{S28} | \frac{S22}{S27}$

1969

Deposit the stone cor. alongside the iron post.

Land, level to gently rolling.
 Soil, clay.
 No timber.
 Undergrowth, shadscale and salt grass.

From the cor. of secs. 22, 23, 26 and 27.

S. $88^{\circ} 25'$ W., bet. secs. 22 and 27.

Over broken land, through shadscale and salt grass.

Asc. 10 ft. along N. slope.

1.30 Wash, 20 lks. wide, 6 ft. deep, drains N.

26.40 Top of asc.; desc. 80 ft. over broken W. slope.

36.55 Fence, bears N. 15° W. and S. 15° E.

40.12 The $\frac{1}{4}$ sec. cor. of secs. 22 and 27, monumented with a sandstone, $12 \times 8 \times 6$ ins., firmly set and plainly mkd. $\frac{1}{4}$ on N. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T17S R9E
 $\frac{1}{4} - \frac{S22}{S27}$

1969

Deposit the stone cor. alongside the iron post.

Deposit broken glass at base of iron post.

N. $88^{\circ} 58'$ W., beginning new measurement.

Desc. 75 ft. over gentle W. slope.

5.00 Small canal, drains irregularly S. 38° W.

40.39 The cor. of secs. 21, 22, 27 and 28.

Land, broken.
 Soil, clay.
 No timber.
 Undergrowth, shadscale and salt grass.

Dependent Resurvey, T. 17 S., R. 9 E.

CHAINS

N. $0^{\circ} 38'$ W., bet. secs. 21 and 22.

Over rolling land, through shadscale and salt grass.

Asc. 15 ft. over gentle S. slope.

6.00 Wash, 20 lks. wide, 4 ft. deep, drains S. 21° W.

15.30 Fence, bears N. 46° E. and S. 46° W.

40.00 Point for the $\frac{1}{2}$ sec. cor. of secs. 21 and 22 at proportionate distance. There is no remaining evidence of the orig. cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T17S R9E

$\frac{1}{2}$

S21|S22

1969

Asc. 45 ft. over gentle S. slope.

79.86 Powerline, bears N. $89^{\circ} 00'$ E. and S. $89^{\circ} 00'$ W.

80.00 The cor. of secs. 15, 16, 21 and 22, monumented with a deteriorated cobblestone, markings completely obliterated. This point fits the calls of the orig. field notes; therefore, is accepted as the orig. cor. (The orig. cor. was a cobblestone.)

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T17S R9E

S16|S15

S21|S22

1969

Deposit the orig. stone cor. alongside the iron post.

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.

Land, gently rolling.

Soil, clay.

No timber.

Undergrowth, shadscale and salt grass.

From the cor. of secs. 14, 15, 22 and 23.

S. $89^{\circ} 25'$ W., bet. secs. 15 and 22.

Over nearly level land, through shadscale and salt grass, along fence line and power line.

19.55 Cor. of fences, bearing N., S., E. and W.

174

Dependent Resurvey, T. 17 S., R. 9 E.

CHAINS

40.40 The $\frac{1}{2}$ sec. cor. of secs. 15 and 22, determined by cor. of fences, bearing N., S. and E. It is accepted as the best available evidence of the position of the orig. cor.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 22 ins. in the ground, with brass cap mkd.

T17S R9E
 $\frac{1}{2}$ $\frac{S15}{S22}$
 1969

S. $89^{\circ} 07' W.$, beginning new measurement.

Continue along ~~power~~ line.

7.90 Small canal, drains irregularly S. $45^{\circ} E.$

20.30 Wash, 50 lks. wide, 10 ft. deep, drains irregularly S.

40.39 The cor. of secs. 15, 16, 21 and 22.

Land, nearly level.

Soil, clay.

No timber.

Undergrowth, shadscale and salt grass.

From the cor. of secs. 10, 11, 14 and 15 previously described.

N. $0^{\circ} 46' W.$, bet. secs. 10 and 11.

Over nearly level land, through shadscale and salt grass, along fence line which bears S. and irregularly N.

39.35 Fence line, bears irregularly E. and W.

39.70 Improved gravel road, bears irregularly E. and W.

40.28 Point for the $\frac{1}{2}$ sec. cor. of secs. 10 and 11 at proportionate distance. There is no remaining evidence of the orig. cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T17S R9E
 $\frac{1}{2}$
 S10 | S11
 1970

Set a steel fence post, 6 ft. long, 2 ft. in the ground alongside the iron post.

41.85 Canal, flows irregularly N. $35^{\circ} E.$ from S. $75^{\circ} W.$

Dependent Resurvey, T. 17 S., R. 9 E.

CHAINS

45.35 Trail road; bears N. and S. 40° W. to gravel road; thence along trail road.

59.40 Leave road which bears N. 33° W. and S. on a curve.

60.42 Point for the N1/16 sec. cor. of secs. 10 and 11.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T17S R9E
N1/16
S10|S11
1970

63.50 Canal, flows N. 33° W.; same canal as at 41.85.

78.85 Wash, 40 lks. wide, 50 ft. deep, drains S. 45° E.

80.56 Point for the cor. of secs. 2, 3, 10 and 11 at proportionate distance. There is no remaining evidence of the orig. cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T17S R9E
S3|S2
S10|S11
1970

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.

From the above cor., the ½ sec. cor. of secs. 2 and 11, bears N. 89° 15' E., 39.91 chs. dist., monumented with a sandstone, 24x14x10 ins., loosely set and dimly mkd. ½ on N. face. (Record calls for a cobblestone, 20x18x9 ins.)

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T17S R9E
½ — S2
S11
1970

Deposit the stone cor. alongside the iron post.

Land, nearly level.

Soil, clay.

No timber.

Undergrowth, shadscale and salt grass.

N. 0° 56' W., bet. secs. 2 and 3.

Enter farm land; thence over level farm land.

176

Dependent Resurvey, T. 17 S., R. 9 E.

CHAINS

- 12.85 Fence, bears E. and W.; enter gently rolling brush land; asc. 100 ft. over gentle SW. slope.
- 13.85 Canal, flows irregularly E.
- 14.95 Trail road, bears irregularly E. and W.
- 24.45 Cor. of fences, bearing S. 80° E. and N.; thence along fence line.
- 39.75 Cor. of fences, bearing S. and W.
- 40.28 The $\frac{1}{2}$ sec. cor. of secs. 2 and 3, monumented with a sandstone, 10x6x3 ins., firmly set in a mound of stone, and plainly mkd. $\frac{1}{2}$ on W. face.
- At the cor. point
- Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground and in a collar of stone, with brass cap mkd.
- T17S R9E
 $\frac{1}{2}$
S3|S2
1970
- Deposit the stone cor. alongside the iron post.
- Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.
-
- N. 0° 10' W., beginning new measurement.
- Asc. 85 ft. over gentle S. slope.
- 39.00 Enter level land.
- 40.71 The cor. of secs. 2, 3, 34 and 35, on the N. bdy. of the Tp., monumented with an iron post, 2 ins. diam., firmly set and protruding 6 ins. above ground with brass cap mkd. and witnessed as described in the official record of the 1940 resurvey by J. C. Clark.
- Land, level to gently rolling.
Soil, sandy loam.
No timber.
Undergrowth, shadscale and salt grass.
- From the cor. of secs. 10, 11, 14 and 15.
- N. 89° 55' W., bet. secs. 10 and 15.
- Over gently rolling land, through shadscale and salt grass, along telephone line.
- 7.10 E. edge of stock pond.
- 9.00 W. edge of stock pond.
- 20.25 Fence, bears N. and S.

Dependent Resurvey, T. 17 S., R. 9 E.

CHAINS

30.95 Fence, bears irregularly N. 40° W. and S. 40° E.

36.00 Canal, flows irregularly S. 45° E.

40.27 The $\frac{1}{4}$ sec. cor. of secs. 10 and 15, monumented with a sandstone, 9x8x4 ins., firmly set and plainly mkd. $\frac{1}{4}$ on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T17S R9E

$\frac{1}{4}$	S10
	S15

1970

Deposit the stone cor. alongside the iron post.

Cor. is located in a fence, bearing S. 55° E. and N. 55° W., 38 lks.; thence N. and S.

S. 89° 11' W., beginning new measurement.

Asc. 20 ft. over gentle E. slope; continue along telephone line.

.35 Cor. of fences, bearing N., S. and W.; thence along fence line.

20.00 Cor. of fences, bearing N., S., E. and W.

25.40 Cor. of fences, bearing N., S., E. and W.; top of asc.; desc. 30 ft. over gentle SW. slope.

40.11 The cor. of secs. 9, 10, 15 and 16, determined by the cor. of fences, bearing E., W. and S. This position is harmoniously related to existing orig. cors., and is accepted as the best existing evidence of the position of the orig. cor.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 20 ins. in the ground and in a collar of stone, with brass cap mkd.

T17S R9E

S9	S10
S16	S15

1970

Land, gently rolling.

Soil, rocky loam.

No timber.

Undergrowth, shadscale and salt grass.

N. 0° 44' W., bet. secs. 9 and 10.

CHAINS

Over gently rolling land, through shadscale and salt grass, along telephone line.

Asc. 30 ft. over S. slope.

19.98 Cor. of fences, bearing N. and E.; thence along fence.

36.00 Cor. of fences, bearing N., S. and E.

40.27 Point selected for the $\frac{1}{4}$ sec. witness cor. at the cor. of a corral fence.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T17S R9E

$\frac{1}{4}$
↑
S9 | S10
W | C
1970

40.40 Point for the $\frac{1}{4}$ sec. cor. of secs. 9 and 10 at proportionate distance, falls in a stock pond where a cor. cannot be perpetuated. There is no remaining evidence of the orig. cor.

Continue over nearly level land.

44.55 Improved gravel road, bears E. and SW. on a curve.

58.55 Fence, bears N. 65° W. and S. 65° E.

60.60 Point for the N1/16 sec. cor. of secs. 9 and 10.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T17S R9E

N1/16
S9 | S10
1970

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.

67.75 Fence, bears N. 30° W. and S. 30° E.

76.00 Canal, flows irregularly N. 75° E.

76.45 Fence, bears N. 63° E. and S. 63° W.; enter level brush land.

79.75 Trail road, bears irregularly E. and W.

80.80 The cor. of secs. 3, 4, 9 and 10, monumented with a sandstone, 12x12x5 ins., firmly set and plainly mkd. 5 notches on S. and 3 notches on E. edges.

At the cor. point

Dependent Resurvey, T. 17 S., R. 9 E.

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T17S R9E

S4|S3
S9|S10

1970

Deposit the stone cor. alongside the iron post.

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.

Land, level to gently rolling.

Soil, rocky loam.

No timber.

Undergrowth, shadscale and salt grass.

From the cor. of secs. 2, 3, 10 and 11.

N. $89^{\circ} 44'$ W., bet. secs. 3 and 10.

Over level land, through shadscale and salt grass.

1.70 Wash, 40 lks. wide, 50 ft. deep, drains irregularly S. 45° E.; leave level land. Ascend 30 feet over NE. slope.

5.35 Top of gravel bench, bears NW. and SE.; thence along top.

9.00 W. rim of bench; desc. 20 ft. over W. slope.

9.50 Cor. of fences, bearing N., N. 80° W. and S. 80° E.

9.60 Canal, flows N.

10.50 Trail road, bears irregularly N. and S.

11.00 Cor. of fences, bearing S., N. 80° W. and S. 80° E.

19.94 Point for the E1/16 sec. cor. of secs. 3 and 10.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T17S R9E

E1/16 S3
S10

1970

Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high N. of cor.

Asc. 70 ft. over NE. slope.

36.20 Trail road, bears irregularly N. 45° W. and S. 45° E.

39.88 The $\frac{1}{4}$ sec. cor. of secs. 3 and 10, monumented with a sandstone, 13x10x8 ins., firmly set and plainly mkd. $\frac{1}{4}$ on N. face.

Dependent Resurvey, T. 17 S., R. 9 E.

CROSSING

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T17S R9E
 ½ — S3
 S10
 1970

Deposit the stone cor. alongside the iron post.

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.

 S. 89° 20' W., beginning new measurement.

Continue over nearly level bench land.

8.40 Trail road, bears irregularly N. and S.

15.40 Rim of bench; desc. 50 ft. over NW. slope.

21.40 Bottom of descent; thence along nearly level land.

40.38 The cor. of secs. 3, 4, 9 and 10.

Land, nearly level to gently rolling.

Soil, rocky loam.

No timber.

Undergrowth, shadscale and salt grass.

N. 1° 18' W., bet. secs. 3 and 4.

Over gently rolling land, through shadscale and salt grass.

Asc. 115 ft. over gentle SW. slope.

33.20 Rim of bench; thence over nearly level bench top.

40.42 The ½ sec. cor. of secs. 3 and 4, monumented with a sandstone, 14x10x8 ins., firmly set and plainly mkd. ½ on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T17S R9E
 ½
 54|S3
 1970

Deposit the stone cor. alongside the iron post.

Raise a mound of stone, 2 ft. base, 1½ ft. high W. of cor.

Dependent Resurvey, T. 17 S., R. 9 E.

CHAINS

- N. 0° 09' W., beginning new measurement.
Continue over nearly level bench top.
- 3.30 Trail road, bears irregularly N. 45° E. and S. 45° W.
- 7.90 Trail road, bears irregularly W. and S. 45° E.
- 13.40 Rim of bench; desc. 75 ft. over N. slope.
- 15.80 Bottom of descent; thence over nearly level land.
- 21.30 Fence, bears N. 65° E. and S. 65° W.
- 30.42 Telephone line, bears N. 35° E. and S. 35° W.
- 34.66 State Highway No. 10, bears N. 35° E. and S. 35° W.
- 40.20 True point for the cor. of secs. 3, 4, 33 and 34 on the N. bdy. of the Tp., at proportionate distance, bet. the $\frac{1}{4}$ sec. cor. of secs. 3 and 34, and the $\frac{1}{4}$ sec. cor. of secs. 4 and 33. There is no remaining evidence of the orig. witness corner.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T16S R9E
S33|S34
 S4|S3
 T17S
 1970

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.

From the above cor., the $\frac{1}{4}$ sec. cor. of secs. 3 and 34, bears N. 89° 27' E., 40.23 chs. dist., and the $\frac{1}{4}$ sec. cor. of secs. 4 and 33, bears S. 89° 27' W., 40.23 chs. dist., each an iron post as described in the approved field notes of the resurvey made by J. C. Clark in 1940.

Land, nearly level to gently rolling.
Soil, rocky loam.
No timber.
Undergrowth, shadscale and salt grass.

From the cor. of secs. 9, 10, 15 and 16.

S. 89° 21' W., bet. secs. 9 and 16.

Over nearly level swamp land, through shadscale and salt grass, along fence and telephone line.

- 16.00 S. end of stock pond.
- 31.20 Powerline, bears N. 18° E. and S. 18° W.
- 37.40 Cor. of fences, bearing N. 35° W. and E.

182

Dependent Resurvey, T. 17 S., R. 9 E.

CHAINS

37.50 Irrigation ditch, 10 lks. wide, 3 ft. deep, flows S. 35° E.

40.29 The $\frac{1}{2}$ sec. cor. of secs. 9 and 16, monumented with a cobblestone which has been broken. The bottom portion still firmly set in the ground, a portion lying loose on the ground plainly mkd. $\frac{1}{2}$.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T17S R9E

$\frac{1}{2}$ $\frac{S9}{S16}$

1970

Deposit the stone cor. alongside the iron post.

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.

N. 89° 55' W., beginning new measurement.

Continue over nearly level land along telephone line.

1.00 Trail road, bears irregularly N. 20° W. and S. 20° E.

11.60 Canal, flows irregularly S.

20.29 Point for the W1/16 sec. cor. of secs. 9 and 16.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T17S R9E

W1/16 $\frac{S9}{S16}$

1970

30.05 Fence, bears N. and S.

40.58 The cor. of secs. 8, 9, 16 and 17, determined by corner of fences, bearing N. and S. 45° W. This position is harmoniously related to existing orig. cors., and is accepted as the best existing evidence of the position of the orig. cor.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T17S R9E

$\frac{S8|S9}{S17|S16}$

1970

Dependent Resurvey, T. 17 S., R. 9 E.

CHAINS

Land, nearly level to gently rolling.
Soil, clay.
No timber.
Undergrowth, shadscale and salt grass.

N. 0° 55' W., bet. secs. 8 and 9.

Over nearly level land, through shadscale and salt grass along fence line.

.50 Concrete canal, flows E.

18.30 Canal, flows irregularly S. 45° E.

20.15 Point for the S1/16 sec. cor. of secs. 8 and 9.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T17S R9E

S1/16

S8|S9

1970

21.15 Cor. of fences, bearing S. and E.

30.70 Fence, bears N. 32° 40' E. and S. 32° 40' W.

36.35 State Highway No. 10, bears N. 32° 40' E. and S. 32° 40' W.

39.25 Telephone line, bears N. 65° E. and S. 65° W.

40.30 Point for the ¼ sec. cor. of secs. 8 and 9, at proportionate distance. There is no remaining evidence of the orig. cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T17S R9E

¼

S8|S9

1970

Raise a mound of stone, 2 ft. base, 1½ ft. high W. of cor.

42.75 Fence, bears N. 32° 40' E. and S. 32° 40' W.

43.75 Wash, 20 lks. wide, 10 ft. deep, drains S. 45° W.

56.70 Wash, 30 lks. wide, 5 ft. deep, drains S. 45° W.

60.45 Point for the N1/16 sec. cor. of secs. 8 and 9.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

Dependent Resurvey, T. 17 S., R. 9 E.

CHAINS

T17S R9E
 N1/16
 S8|S9
 1970

- 61.00 Canal, flows S. 45° E.
 62.40 Fence, bears N. 30° W. and S. 30° E.
 80.60 The cor. of secs. 4, 5, 8 and 9, monumented with a sandstone, 15x9x9 ins., firmly set and plainly mkd. 5 notches on S. and 4 notches on E. edges.
- At the cor. point
- Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T17S R9E
 S5|S4
 S8|S9
 1970

Deposit the stone cor. alongside the iron post.

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.

Land, nearly level.
 Soil, rocky loam.
 No timber.
 Undergrowth, shadscale and salt grass.

- From the cor. of secs. 3, 4, 9 and 10.
 N. 88° 25' W., bet. secs. 4 and 9.
 Over nearly level land, through shadscale and salt grass.
- 5.85 Trail road, bears N. 80° W. and S. 80° E.
 10.00 Trail road, bears irregularly N. and S.
 16.35 Bottom of wide draw, drains irregularly S. 45° E.
 20.19 Point for the E1/16 sec. cor. of secs. 4 and 9.
- Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, with brass cap mkd.

T17S R9E
 E1/16—S4
 S9
 1970

- 35.45 Wash, 10 lks. wide, 3 ft. deep, drains S. 45° E.
 40.38 The ¼ sec. cor. of secs. 4 and 9, monumented with a sandstone, 10x9x7 ins., firmly set and plainly mkd. ¼ on N. face.

At the cor. point

Dependent Resurvey, T. 17 S., R. 9 E.

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T17S R9E

$$\frac{1}{4} \begin{array}{l} S4 \\ S9 \end{array}$$

1970

Deposit the stone cor. alongside the iron post.

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.

S. $87^{\circ} 39'$ W., beginning new measurement.

Continue over nearly level land.

- 7.85 Fence, bears N. $32^{\circ} 40'$ E. and S. $32^{\circ} 40'$ W.
- 8.45 Telephone line, bears N. $32^{\circ} 40'$ E. and S. $32^{\circ} 40'$ W.
- 11.40 State Highway No. 10, bears N. $32^{\circ} 40'$ E. and S. $32^{\circ} 40'$ W.
- 14.85 Fence, bears N. $32^{\circ} 40'$ E. and S. $32^{\circ} 40'$ W.
- 27.00 Trail road, bears irregularly N. and S.
- 40.82 The cor. of secs. 4, 5, 8 and 9.
- Land, nearly level.
Soil, rocky loam.
No timber.
Undergrowth, shadscale and salt grass.

N. $0^{\circ} 04'$ W., bet. secs. 4 and 5.

Over nearly level land, through shadscale and salt grass.

- 40.28 The $\frac{1}{4}$ sec. cor. of secs. 4 and 5, monumented with a sandstone, $12 \times 8 \times 4$ ins., firmly set and dimly mkd. $\frac{1}{4}$ on W. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T17S R9E

$$\frac{1}{4} \begin{array}{l} S5 \\ S4 \end{array}$$

1970

Deposit the stone cor. alongside the iron post.

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.

N. $0^{\circ} 30'$ W., beginning new measurement.

Dependent Resurvey, T. 17 S., R. 9 E.

CHAINS

Continue over nearly level land.

22.00 Trail road, bears irregularly N. 45° E. and S. 45° W.

40.39 The cor. of secs. 4, 5, 32 and 33 on the N. bdy. of the Tp. monumented with an iron post, 2 ins. diam., firmly set and protruding 6 ins. above ground, with brass cap mkd. and witnessed as described in the official record of the 1940 remonumentation.

Land, nearly level.

Soil, rocky loam.

No timber.

Undergrowth, shadscale and salt grass.

From the cor. of secs. 8, 9, 16 and 17.

S. 89° 54' W., bet. secs. 8 and 17.

Over nearly level land, through shadscale and salt grass, along telephone line and fence.

3.20 Bottom of wash, 2.00 chs. wide, 10 ft. deep, drains S. 45° E.

22.55 Fence, bears N. 32° 40' E. and S. 32° 40' W.

23.95 State Highway No. 10, bears N. 32° 40' E. and S. 32° 40' W. W.

25.20 Fence, bears N. 32° 40' E. and S. 32° 40' W.

37.55 Fence, bears N. 42° E. and S. 42° W.

37.75 Telephone line, bears N. 42° E., S. 42° W., and E.

38.95 Fence, bears N. 42° E. and S. 42° W.

40.80 The $\frac{1}{4}$ sec. cor. of secs. 8 and 17, determined by the center of a lane (no longer in use), and in line with extension of fences to the S. and E. It is accepted as the best existing evidence of the position of the orig. cor.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T17S R9E

$\frac{1}{4}$ $\frac{S8}{S17}$

1970

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.

Dependent Resurvey, T. 17 S., R. 9 E.

CHAINS

S. 89° 20' W., beginning new measurement.

Continue over nearly level land.

.30 Powerline, bears N. and S.

21.80 Canal, flows irregularly N. 35° E.

30.10 Fence, bears N. and S.

30.50 Improved gravel road, bears N. and S.

31.10 Telephone line, bears N. and S.; fence bears W.; thence along fence line.

39.50 Trail road, bears irregularly N. and S. 10° E. Canal on E. side of road, flows S. 10° E. from N.

39.73 The cor. of secs. 7, 8, 17 and 18, determined longitudinally by proportionate measurement and latitudinally by the extension of a fence to the E.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T17S R9E

S7	S8
S18	S17

1970

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.

Raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

Land, nearly level.

Soil, rocky loam.

No timber.

Undergrowth, shadscale and salt grass.

S. 89° 19' W., bet. secs. 7 and 18.

Over nearly level land, through shadscale and salt grass, along the N. edge of Huntington Reservoir.

26.70 Concrete flume and canal, flows into Huntington Reservoir, W. edge of reservoir.

34.85 Fence, bears N. and S.

36.70 Trail road, bears N. 65° E. and S. 65° W.

37.60 Canal, flows N. 65° E.

38.20 Telephone line, bears N. 35° E. and S. 35° W.

39.90 The ½ sec. cor. of secs. 7 and 18 determined longitudinally by a fence bearing N. and S.

Dependent Resurvey, T. 17 S., R. 9 E.

HAINF

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T17S R9E
 $\frac{1}{2}$ $\frac{S7}{S18}$
 1970

S. $89^{\circ} 19'$ W., beginning new measurement.

Continue over nearly level land.

- 12.00 Canal, flows S. 60° E.
 14.15 Fence, bears N. 38° W. and S. 38° E.
 21.00 Fence, bears N. and S.
 21.20 Trail road, bears N. and S.
 21.80 Fence, bears N. and S.
 41.40 Powerline, bears N. and S.
 41.53 The cor. of secs. 7, 12, 13 and 18, on the W. bdy. of the Tp.

Land, nearly level.

Soil, clay.

No timber.

Undergrowth, shadscale and salt grass.

From the cor. of secs. 7, 8, 17 and 18.

N. $1^{\circ} 08'$ W., bet. secs. 7 and 8.

Over level swamp land, through shadscale and salt grass, along the west side of a trail road.

- 9.00 Trail road, curves irregularly W. from the S.; leave swamp land.
 10.10 Canal, flows irregularly S. 75° E., curving to the S. from N. 75° W.
 10.70 Trail road, bears irregularly E. and W.
 11.20 Cor. of fences, bearing N. and S. 75° E.; thence along fence.
 13.50 Telephone line, bears E. and S. 75° W.
 20.00 Powerline, bears E. and S. 75° W.
 25.40 Cor. of fences, bearing N., S. and E.

Dependent Resurvey, T. 17 S., R. 9 E.

CHAINS

37.50 Cor. of fences, bearing N., S., E. and W.

40.34 The $\frac{1}{4}$ sec. cor. of secs. 7 and 8, determined latitudinally by proportionate measurement and longitudinally by an old fence bearing N. and S.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T17S R9E

$\frac{1}{4}$

S7|S8

1970

N. $0^{\circ} 01'$ W., beginning new measurement.

Continue over nearly level land along fence line.

.60 Cor. of fences, bearing S., E. and W.

10.50 Canal, flows irregularly E.

11.25 Trail road, bears E. and W.

21.25 South end of fence, bearing N.; thence along fence line.

28.25 Trail road, bears N. 75° W. and S. 75° E.

40.34 The cor. of secs. 5, 6, 7 and 8, marked by a small stone, 6x5x4 ins.) at the cor. of fences, bearing N., S. and E. This position is harmoniously related to existing orig. cors., and is accepted as the best existing evidence of the position of the orig. cor.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T17S R9E

S6|S5

S7|S8

1970

Bury the stone alongside the iron post.

Raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

Land, nearly level.

Soil, clay.

No timber.

Undergrowth, shadscale and salt grass.

From the cor. of secs. 4, 5, 8 and 9.

190

Dependent Resurvey, T. 17 S., R. 9 E.

CHAINS

S. 89° 21' W., bet. secs. 5 and 8.

Over nearly level bench land, through shadscale and salt grass.

10.30 W. rim of bench, bears NW. and SE.; desc. 40 ft. over SW. slope.

13.30 Base of bench, bears NW. and SE.; thence over nearly level land.

16.00 Canal, flows irregularly S. 35° E.; cor. of fences, bearing W. and S. 45° E.; thence along fence line.

19.99 Point for the E1/16 sec. cor. of secs. 5 and 8.

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, with brass cap mkd.

T17S R9E
E1/16 $\frac{S5}{S8}$
1970

Cor. is located 03 lks. N. of fence, bearing E. and W.

39.98 The ¼ sec. cor. of secs. 5 and 8 determined by the cor. of fences, bearing S., E. and W., and is accepted as the best existing evidence of the position of the orig. cor.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground and in a collar of stone, with brass cap mkd.

T17S R9E
¼ $\frac{S5}{S8}$
1970

S. 89° 57' W., beginning new measurement.

Continue over nearly level land along trail road and fence line.

29.90 Improved gravel road, bears N. and S.; end of trail road.

40.04 The cor. of secs. 5, 6, 7 and 8.

Land, nearly level.
Soil, rocky clay.
No timber.
Undergrowth, shadscale and salt grass.

S. 89° 24' W., bet. secs. 6 and 7.

Dependent Resurvey, T. 17 S., R. 9 E.

CHAINS

Over gently rolling land, through shadscale and salt grass.

Asc. 100 ft. over E. slope.

9.80 Top of asc.; desc. 110 ft. over gentle W. slope.

25.50 Wash, 10 lks. wide, 3 ft. deep, drains irregularly S.

40.59 The $\frac{1}{4}$ sec. cor. of secs. 6 and 7, monumented with a sandstone, 10x5x2 ins., firmly set and plainly mkd. $\frac{1}{4}$ on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 20 ins. in the ground and in a collar of stone, with brass cap mkd.

T17S R9E

$\frac{1}{4}$ $\frac{S6}{S7}$

1970

Deposit the stone cor. alongside the iron post.

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.

S. 89° 06' W., beginning new measurement.

Desc. 15 ft. over gentle W. slope.

6.50 Wash, 10 lks. wide, 4 ft. deep, drains S.

11.80 Wash, 1.00 ch. wide, 10 ft. deep, drains S.; asc. 30 ft. over gentle E. slope.

24.50 Low spur, projects SE.; desc. 30 ft. over gentle SW. slope.

30.70 Draw, drains S. 45° E.; asc. 40 ft. over E. slope.

35.00 Trail road, bears N. 45° W. and S. 45° E.

40.00 Ridge, bears NW. and SE.; desc. 25 ft. over SW. slope.

40.56 The cor. of secs. 1, 6, 7 and 12, on the W. bdy. of the Tp.

Land, gently rolling.

Soil, rocky clay.

No timber.

Undergrowth, shadscale and salt grass.

From the cor. of secs. 5, 6, 7 and 8.

N. 0° 52' W., bet. secs. 5 and 6.

Dependent Resurvey, T. 17 S., R. 9 E.

CHAINS

Over nearly level land, through shadscale and salt grass, along fence line.

20.10 Point for the S. 1/16 sec. cor. of secs. 5 and 6.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T17S R9E
S1/16
S6|S5
1970

Raise a mound of stone, 2 ft. base, 1½ ft. high W. of cor.

30.80 Cor. of fences, bearing S. and N. 70° E.

36.40 Wash, 10 lks. wide, 1 ft. deep, drains E. at base of bench; asc. 60 ft. over S. slope.

40.20 Point for the ¼ sec. cor. of secs. 5 and 6 at proportionate distance. There is no remaining evidence of the orig. cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T17S R9E
¼
S6|S5
1970

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside the iron post.

Raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

Desc. 40 ft. over gentle N. slope.

41.60 Trail road, bears N. 75° W. and S. 75° E.

48.55 Wash, 20 lks. wide, 1 ft. deep, drains E.

52.75 Base of small hills; asc. 40 ft. over SW. slope.

57.05 Top of hill; desc. 25 ft. over NE. slope.

60.75 Wash, 20 lks. wide, 3 ft. deep, at base of hill, drains SE.; thence over nearly level land.

72.85 Trail road, bears irregularly N. 45° W. and S. 45° E.

80.51 True point for the cor. of secs. 5, 6, 31 and 32, on the N. bdy. of the Tp., from which the witness cor. bears N. 89° 28' E., 7.00 chs. dist., monumented with an iron post, 2 ins. diam., firmly set and protruding 10 ins. above ground, with brass cap mkd. and witnessed as described in the official record of the 1940 resurvey by J. C. Clark.

Dependent Resurvey, T. 17 S., R. 9 E.

CHAINS

Land, nearly level to gently rolling.
Soil, rocky sandy clay.
No timber.
Undergrowth, shadscale and salt grass.

General Description

A considerable variety of land and soil is found in the portion of Township 17 South, Range 9 East, covered by this survey. The general elevation is about 6,000 ft. above sea level. The soil ranges from sand to a rocky clay. Most of the township is level to gently rolling hills. There is no timber and the undergrowth is mainly shadscale and salt grass. The township is accessible by State Highway No. 10, improved gravel roads and numerous trail roads located throughout the township. The general drainage of the township is in a southerly direction.

Blank

Page

CERTIFICATE OF SURVEY

1967

Craig P. Sylvester

HEREBY

CERTIFY upon honor that, in pursuance of special instructions bearing date of the 4th day

of April 19 69 (1969) (I) (me) have dependently resurveyed the east 3 miles of the south boundary, the south 2 miles of the east boundary, the north 2 miles of the Second Guide Meridian East through Township 17 South, (west boundary) and a portion of the subdivision of Township 17 South, Range 9 East

of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by (me), (me) and under (my) direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

February 10, 1971 (Date)

Craig P. Sylvester (Cadastral Surveyor) Supervisory

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

FOR APPROVAL MAR 16 1971

BUREAU OF LAND MANAGEMENT Washington, D.C.

The foregoing field notes of the dependent resurvey of the east 3 miles of the south boundary, the south 2 miles of the east boundary, the north 2 miles of the Second Guide Meridian East through T. 17 S. (west boundary) and a portion of the subdivisional lines of T. 17 S., R. 9 E. of the Salt Lake Meridian, Utah

executed by Craig P. Sylvester, Supervisory Cadastral Surveyor having been critically examined and found correct, are hereby approved

JUN 2 1971 (Date)

Clark L. Gunn (Chief, Division of Cadastral Survey)

CERTIFICATE OF TRANSCRIPT

~~I certify that the foregoing transcript of the field notes of the above described surveys is a true copy of the original field notes~~

Blank

Page

Blank

Page

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

ORIGINAL

FIELD NOTES

OF THE

DEPENDENT RESURVEY OF THE EAST AND SOUTH BOUNDARIES

AND

A PORTION OF THE SUBDIVISIONAL LINES

OF

TOWNSHIP 17 SOUTH, RANGE 10 EAST

DEPT. OF INTERIOR
BUR. OF LAND MGMT.

RECEIVED
STATE LAND OFFICE
SALT LAKE CITY, UTAH
Meridian,
JUN 21 PM 2:50

Of the SALT LAKE

In the State of UTAH

EXECUTED BY

Craig P. Sylvester

Supervisory Cadastral Surveyor

Under special instructions dated April 4, 19 69, which provided for the surveys
included under Group Number 506, approved April 22, 1969,
and assignment instructions dated June 2, 19 69.

Survey commenced June 18, 19 69

Survey completed August 6, 19 69

INDEX DIAGRAM

Township 17 SOUTH, Range 10 EAST

6	5	4	3	2 24	1 8 24
7	8	9	10 40	33 11 22 32	12 7 22
18	17	16 39	15 31 38	14 20 30	13 6 19
19 49	20 49	21 37 45	22 29 36	23 18 28	24 4 18
30 47 47	29 43 46	28 35 43	27 27 35	26 16 26	25 3 16
31 45 14	32 41 13	33 33 12	34 25 11	35 15 10	36 2 9

Township 17 South, Range 10 East

CHAINS

The history of earlier surveys of T. 16 S., R. 10 E., is as follows:

<u>Part Surveyed</u>	<u>Original Survey By - Date</u>	<u>Resurvey By - Date</u>
<u>North Boundary</u>		
West 3 Miles	A. D. Ferron 1880	A. D. Ferron 1883
East 3 Miles	A. D. Ferron 1883	John T. Breckon 1891

West Boundary

All	A. D. Ferron 1873	
-----	-------------------	--

South Boundary

West 3 Miles	A. D. Ferron 1880	A. D. Ferron 1883
East 3 Miles	A. D. Ferron 1883	John T. Breckon 1891
All		Retr. by H. D. Heist & W. A. Stumm

East Boundary

All	A. D. Ferron 1883	John T. Breckon 1891
-----	-------------------	-------------------------

Subdivisions

West Half	A. D. Ferron 1880	
East Half	John T. Breckon 1891	
3rd Meridional Line		John T. Breckon 1891

The following field notes are those of the dependent resurvey of the East Boundary, the South Boundary and a portion of the subdivisional lines of T. 17 S., R. 10 E. The resurvey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1947, and Special Instructions for Group 506, Utah, dated April 4, 1969.

Before restoring the corners, the lines of the original survey and resurvey were retraced and diligent search made for any evidence of the orig. corner, bearing trees or other calls of the original field note record.

The rules of proportionate measurement were applied to ascertain the position of the last corners, but not until exhausting every reasonable possibility of finding direct evidence for the control of each particular corner.

The direction of all lines were determined by numerous altitude observations on the sun and carried forward by sustained angulation, and the distances were determined by chaining where possible; otherwise, by triangulation. The details of such triangulations have been thoroughly verified and in order to simplify the record the diagrams and reductions are omitted from these field notes.

Township 17 South, Range 10 East

CHAINS

The timber in this township is all old scrub juniper and is not suitable for bearing trees.

The geographic position of the southeast corner of the township is at Latitude 39° 17' 39.6" N. and Longitude 110° 44' 18.5" W., as computed by traverse and section line ties from the southeast corner of T. 16 S., R. 10 E., determined by the U. S. Geological Survey to be in Latitude 59° 22' 56.282" N. and Longitude 110° 44' 19.607" W.

The magnetic declination was read at a number of stations throughout the survey and the average of the readings was found to be 15° 30' E.

Dependent Resurvey of the East Boundary,
Township 17 South, Range 10 East

Reestablishment of the Resurvey Executed
by J. T. Breckon in 1891.

The cor. of Tps. 17 and 18 S., Rs. 10 and 11 E., monumented with a sandstone, 14x10x10 ins., firmly set and plainly mkd. 6 notches on all 4 edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T17S
R10E R11E
<u>S36</u> <u>S31</u>
S1 S6
T18S
1969

Bury orig. stone cor. alongside iron post.

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.

Raise a mound of stone, 5 ft. base, 2 ft. high, N. of cor.

Cor. falls 20 lks. W. of small wash.

N. 0° 05' W., bet. secs. 31 and 36.

Over broken canyon lands, through salt grass; asc. 50 ft. over S. slope.

.70 Small wash, 10 lks. wide, 2 ft. deep, drains irregularly E.

9.10 Spur, slopes E.; desc. 130 ft. over N. slope.

40.26 The ¼ sec. cor. of secs. 31 and 36, which is monumented with a sandstone, 12x10x6 ins., firmly set and plainly mkd. ¼ on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, with brass cap mkd.

Dependent Resurvey, East Bdy., T. 17 S., R. 10 E.

CHAINS

T17S
R10E R11E
 $\frac{1}{2}$
S36|S31
1969

Bury orig. stone cor. alongside iron post.
Raise a mound of stone, $2\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high,
W. of cor.
Cor. falls in flat.

N. $0^{\circ} 15'$ E., beginning new measurement.

Asc. 25 ft. over S. slope.

- 6.50 Enter dense scrub timber; desc. 90 ft. over N. slope.
11.80 Trail road on top of small spur, bears N. 45° E. and
S. 45° W.
13.00 Leave timber.
32.00 Stream bed, drains irregularly W. 75 lks.; thence N.
40.50 Trail road, bears irregularly E. and W.
40.94 The cor. of secs. 25, 30, 31 and 36, which is monumented
with a sandstone, $12 \times 12 \times 3$ ins., firmly set and plainly
mkd. 5 notches on N. and 1 notch on S. edges.
At the cor. point
Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 12 ins.
in the ground to solid rock and in a mound of stone, 4
ft. base to top, with brass cap mkd.

T17S
R10E R11E
S25|S30
S36|S31
1969

Bury orig. stone cor. alongside iron post.

Cor. falls in a fence, bears W. and E. 50 lks.;
thence S. 43° E.

Land, broken canyon land.
Soil, sandy clay.
Timber, dense scrub juniper.
Undergrowth, salt grass.

N. $0^{\circ} 04'$ E., bet. secs. 25 and 30.

- Over rolling foothills, through salt grass; asc. 50 ft.
over S. slope.
5.65 Top of ridge, enter dense scrub timber; desc. 80 ft.
over N. slope.
10.35 Enter widely scattered timber.
15.00 Bottom of canyon, old stream bed winds back and forth
across line down the canyon.
27.00 Old steam bed, drains N. 10° E.

Dependent Resurvey, East Bdy., T. 17 S., R. 10 E.

CHAINS

- 37.25 Stream bed, drains irregularly N. 80° E.
- 39.78 The ½ sec. cor. of secs. 25 and 30, which is monumented with a sandstone, 20x16x4 ins., firmly set and plainly mkd. ½ on W. face.
At the cor. point
Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T17S
R10E R11E
½
S25|S30
1969

Bury orig. stone cor. alongside iron post.
Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.
Cor. falls on gentle S. slope.

- N. 0° 15' W., beginning new measurement.
Asc. 110 ft. over SE. slope.
- 13.30 Spur, slopes E.; desc. 75 ft. over N. slope.
- 17.00 Draw, drains irregularly N. 40° E.; asc. 35 ft. over S. slope.
- 36.15 Ridge, bears NE. and SW.; desc. 90 ft. over N. slope.
- 39.88 The cor. of secs. 19, 24, 25 and 30, which is monumented with a sandstone, 24x10x8 ins., firmly set and plainly mkd. 4 notches on N. and 2 notches on S. edges.
At the cor. point
Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground to solid rock and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T17S
R10E R11E
S24|S19
S25|S30
1969

Bury orig. stone cor. alongside iron post.
Cor. falls on a rocky NW. slope.
Land, rolling foothills.
Soil, sandstone and sandy clay.
Timber, widely scattered scrub juniper.
Undergrowth, salt grass.

- N. 0° 35' E., bet. secs. 19 and 24.
Over rolling canyon land, through widely scattered scrub timber.
- 2.00 Small draw, drains irregularly W.
- 4.20 Small spur, slopes W.

Dependent Resurvey, East Bdy., T. 17 S., R. 10 E.

CHAINS

15.75 Spur, slopes W.; desc. 130 ft. over gentle N. slope.

35.10 Rocky spur, bears N. 50° E. and S. 50° W.

40.49 The $\frac{1}{2}$ sec. cor. of secs. 19 and 24, which is monumented with a sandstone, 16x8x8 ins., firmly set and plainly mkd. $\frac{1}{4}$ on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 20 ins. in the ground and in a collar of stone, with brass cap mkd.

T17S

R10E R11E

$\frac{1}{2}$
S24|S19

1969

Bury orig. stone cor. alongside iron post.

N. 1° 00' W., beginning new measurement.

Asc. 50 ft. over S. slope.

9.20 Rocky spur, bears E. and W.; continue over large sandstones.

37.58 Sandstone spur, bears E. and W.; desc. 70 ft. over N. slope.

40.43 The cor. of secs. 13, 18, 19 and 24, which is monumented with a sandstone, 22x18x4 ins., firmly set and plainly mkd. 3 notches on the N. and S. edges.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 20 ins. in the ground and in a collar of stone, with brass cap mkd.

T17S

R10E R11E

S13|S18
S24|S19

1969

Bury orig. stone cor. alongside iron post.

Set a steel fence post, 6 ft. long, 20 ins. in the ground alongside iron post.

Cor. falls on a rocky E. slope.

Land, rolling canyon land.
Soil, sandy clay with large sandstones.
Timber, widely scattered scrub juniper.
Undergrowth, salt grass.

Dependent Resurvey, East Bdy., T. 17 S., R. 10 E.

CHAINS

N. 0° 09' E., bet. secs. 13 and 18.

Over rolling canyon land, through widely scattered scrub timber; desc. 50 ft. over gentle N. slope.

- 14.25 Improved dirt road to Dinosaur Quarry, bears E. and W.
 15.00 Fence, bears E. and W.
 22.50 Rocky spur, bears N. 60° E. and S. 60° W.
 27.00 Leave timber.
 40.87 The $\frac{1}{4}$ sec. cor. of secs. 13 and 18, which is monumented with a sandstone, 16x6x6 ins., firmly set and plainly mkd. $\frac{1}{2}$ on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground and in a collar of stone, with brass cap mkd.

T17S
 R10E R11E
 $\frac{1}{2}$
 S13|S18
 1969

Bury orig. stone cor. alongside iron post.

North, beginning new measurement.

Desc. 70 ft. over gentle N. slope.

- 10.50 Trail road, bears irregularly N. 25° W. and S. 25° E.
 15.00 Wash, 20 lks. wide, 15 ft. deep, drains N. 70° W.
 23.20 Same trail road, bears irregularly N. 30° E. and S. 30° W.
 40.60 The cor. of secs. 7, 12, 13 and 18, which is monumented with a sandstone, 18x6x6 ins., firmly set and dimly mkd. 2 notches on N. and 4 notches on S. edges.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground and in a collar of stone, with brass cap mkd.

T17S
 R10E R11E
 $\frac{1}{2}$
 S12|S7
 S13|S18
 1969

Bury orig. stone cor. alongside iron post.

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.

Dependent Resurvey, East Bdy., T. 17 S., R. 10 E.

CHAINS

Land, rolling canyon land.
Soil, sandy clay.
Timber, widely scattered scrub juniper.
Undergrowth, salt grass.

N. 0° 24' W., bet. secs. 7 and 12.

Over nearly level desert land, through shadscale and salt grass.

.75 Trail road, bears irregularly N. and S.

17.55 Trail road, bears irregularly N. 45° E. and S. 45° W.

20.10 Fence, bears E. and W.

20.31 Point for the S1/16 sec. cor. of secs. 7 and 12.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T17S
R10E R11E
S
1/16
S12|S7
1969

40.62 Point for the ¼ sec. cor. of secs. 7 and 12 at proportionate distance. There is no remaining evidence of the orig. corner.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T17S
R10E R11E
¼
S12|S7
1969

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.

56.47 Wash, 30 lks. wide, 2 ft. deep, drains N. 45° W.

64.15 Wash, 50 lks. wide, 3 ft. deep, drains N. 40° W.

67.67 Same wash, 50 lks. wide, 3 ft. deep, drains N. 15° E.

80.00 Irrigation canal, 30 lks. wide, 10 ft. deep, drains irregularly N. 45° E.

81.24 Point for the cor. of secs. 1, 6, 7 and 12 at proportionate distance. There is no remaining evidence of the orig. corner.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

Dependent Resurvey, East Bdy., T. 17 S., R. 10 E.

CHAINS

T17S
R10E R11E
S1|S6
S12|S7
1969

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.

Land, nearly level desert.
Soil, sandy clay.
No timber.
Undergrowth, shadscale and salt grass.

N. 0° 24' W., bet. secs. 1 and 6.

Over nearly level desert land, through shadscale and tumbleweed.

23.70 Trail road, bears N. 20° E. and S. 40° W.

40.62 Point for the $\frac{1}{4}$ sec. cor. of secs. 1 and 6, determined latitudinally by an old fence bearing E. and W.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T17S
R10E R11E
 $\frac{1}{4}$
S1|S6
1969

N. 0° 24' W., beginning new measurement.

.80 Trail road, bears N. 15° W. and S. 15° E.

20.14 Point for the N1/16 sec. cor. of secs. 1 and 6.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T17S
R10E R11E
N
1/16
S1|S6
1969

40.28 The cor. of Tps. 16 and 17 S., Rs. 10 and 11 E., an iron post, $2\frac{1}{2}$ ins. diam., set, mkd. and witnessed as described in the field notes of T. 16 S., R. 10 E., surveyed concurrently under this same group.

Land, nearly level desert.
Soil, sandy clay.
No timber.
Undergrowth, shadscale and tumbleweed.

Dependent Resurvey of the South Boundary,
Township 17 South, Range 10 East

Dependent Resurvey, South Bdy., T. 17 S., R. 10 E.

CHAINS

Reestablishment of the Retracement
Executed by H. D. Heist in 1910.

From the cor. of Tps. 17 and 18 S., Rs. 10 and 11 E.
N. 88° 31' W., bet. secs. 1 and 36.

Over broken canyon land; asc. 120 ft. over E. slope.

10.70 Spur, slopes S., enter dense scrub timber; desc. 75 ft.
over W. slope.

36.30 Draw, drains irregularly S. 75° W.

38.05 Draw, drains N. 15° W.

39.82 The $\frac{1}{2}$ sec. cor. of secs. 1 and 36 which is monumented
with a limestone, 16x10x4 ins., firmly set and plainly
mkd. $\frac{1}{2}$ on N. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 4 ins.
in the ground to solid rock and in a mound of stone,
4 ft. base to top, with brass cap mkd.

T17S R10E

$\frac{1}{2}$ S36

S1

T18S R10E

1969

Bury orig. stone cor. alongside iron post.

S. 89° 57' W., beginning new measurement.

Desc. 130 ft. over W. slope.

20.00 Draw, drains irregularly N.

39.78 The cor. of secs. 1, 2, 35 and 36, which is monumented
with a sandstone, 22x12x10 ins., firmly set and plainly
mkd. 5 notches on W. and 1 notch on E. edges.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T17S R10E

S35|S36

S2|S1

T18S R10E

1969

Bury orig. stone cor. alongside iron post.

Raise a mound of stone, $2\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high,
N. of cor.

Dependent Resurvey, South Bdy., T. 17 S., R. 10 E.

CHAINS

Land, broken canyon land.
Soil, rocky sandy clay.
Timber, dense scrub juniper.
No undergrowth.

N. 88° 28' W., bet. secs. 2 and 35.

Over rolling hills, through dense scrub timber; desc.
25 ft. over gentle W. slope.

- 11.25 Leave timber, enter shadscale and salt grass.
21.75 Trail road, bears irregularly N. and S.
40.24 The $\frac{1}{2}$ sec. cor. of secs. 2 and 35, which is monumented
with a sandstone, 18x12x5 ins., firmly set and plainly
mkd. $\frac{1}{2}$ on N. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins.
in the ground, with brass cap mkd.

T17S R10E

$\frac{1}{2}$ $\frac{S35}{S2}$

T18S R11E

1969

Bury orig. stone cor. alongside iron post.

Raise a mound of stone, $2\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high,
N. of corner.

Cor. falls in bottom of flat.

S. 89° 15' W., beginning new measurement.

Asc. 150 ft. over E. slope.

- 12.25 Trail road, bears irregularly N. and S.
21.55 Spur, slopes S.
27.25 Draw, drains irregularly S.
33.25 Spur, slopes S.; desc. 75 ft. over W. slope.
40.02 Point for the cor. of secs. 2, 3, 34 and 35 at propor-
tionate bearing and distance; there is no remaining
evidence of the orig. corner.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T17S R10E

$\frac{S34|S35}{S3|S2}$

T18S R10E

1969

Dependent Resurvey, South Bdy., T. 17 S., R. 10 E.

CHAINS

Raise a mound of stone, 3 ft. base, 2 ft. high,
W. of corner.

Set a steel fence post, 6 ft. long, 2 ft. in the
ground, alongside iron post.

Land, rolling hills.

Soil, rocky sandy clay.

Timber, dense scrub juniper.

Undergrowth, shadscale and salt grass.

N. 88° 30' W., bet. secs. 3 and 34.

Over rolling hills, through shadscale and salt grass.

Desc. 135 ft. over W. slope.

30.90 Trail road in bottom of draw bears irregularly N. 55°
W. and S. 55° E.; asc. 30 ft. over E. slope.

33.80 Top of small hill; desc. 30 ft. over W. slope.

39.88 The $\frac{1}{2}$ sec. cor. of secs. 3 and 34, which is monumented
with a sandstone, 24x10x3 ins., firmly set and plainly
mkd. $\frac{1}{2}$ on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 20 ins.
in the ground, with brass cap mkd.

T17S R10E

$\frac{1}{2}$ S34
S3

T18S R10E

1969

Bury orig. stone cor. alongside iron post.

N. 89° 40' W., beginning new measurement.

4.15 Wash, 30 lks. wide, 3 ft. deep, drains irregularly N.;

enter flat.

8.65 Wash, 30 lks. wide, 4 ft. deep, drains irregularly N.

12.15 Trail road, bears N. 30° E. and S. 30° W.

40.17 The cor. of secs. 3, 4, 33 and 34, which is monumented
with a sandstone, 18x12x3 ins., firmly set and plainly
mkd. 3 notches on the E. and W. edges.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T17S R10E

S33 | S34

S4 | S3

T18S R10E

1969

Dependent Resurvey, South Bdy., T. 17 S., R. 10 E.

CHAINS

Bury orig. stone cor. alongside iron post.

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.

Land, rolling hills.
Soil, sandy clay.
No timber.
Undergrowth, shadscale and salt grass.

S. 89° 28' W., bet. secs. 4 and 33.

Over nearly level desert land, through shadscale and salt grass.

- 3.35 Wash, 70 lks. wide, 10 ft. deep, drains irregularly N.
- 30.85 Small spur, slopes S.
- 38.05 Wash, 30 lks. wide, 8 ft. deep, drains irregularly S.
- 39.58 Point for the 1/2 sec. cor. of secs. 4 and 33 at proportionate distance. There is no remaining evidence of the orig. corner.

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.

T17S R10E
 1/2 S33
 S4
 T18S
 1969

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.

- 68.05 Fence, bears N. 15° E. and S. 15° W.
- 79.55 Trail road, bears irregularly N. and S.
- 80.06 The cor. of secs. 4, 5, 32 and 33, which is monumented with a sandstone, 10x8x4 ins., firmly set and plainly mkd. 4 notches on E. and 2 notches on W. edges.

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.

T17S R10E
S32|S33
 S5|S4
 T18S R10E
 1969

Bury orig. stone cor. alongside iron post.

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.

Dependent Resurvey, South Bdy., T. 17 S., R. 10 E.

CHAINS

Land, nearly level desert.
Soil, sandy.
No timber.
Undergrowth, shadscale and salt grass.

S. 89° 36' W., along the S. bdy. of sec. 32.

Over gently rolling desert land, through shadscale and salt grass; asc. 60 ft. over gentle E. slope.

3.55 Improved dirt road to dinosaur quarry, bears irregularly N. and S.

22.55 Wash, 15 lks. wide, 3 ft. deep, drains irregularly N.

40.24 The $\frac{1}{4}$ sec. cor. of sec. 32, which is monumented with a shalestone, 18x15x2 ins., firmly set and plainly mkd. $\frac{1}{4}$ on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T17S R10E
 $\frac{1}{4}$ S32
T18S
1969

No accessories available.

S. 89° 36' W., beginning new measurement.

Asc. 20 ft. over gentle E. slope.

6.30 Draw, drains irregularly N.

7.80 Spur, slopes N.; desc. 55 ft. over gentle W. slope.

19.30 Draw, drains irregularly N.

30.30 Draw, drains irregularly N.

40.31 The cor. of secs. 31 and 32, which is monumented with a shalestone, 18x16x2 ins., firmly set and plainly mkd. 5 notches on E. and 1 notch on W. edges.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 20 ins. in the ground, with brass cap mkd.

T17S R10E
S31|S32
S6
T18S R10E
1969

Bury orig. stone cor. alongside iron post.

Dependent Resurvey, South Bdy., T. 17 S., R. 10 E.

CHAINS

No accessories available.

Land, gently rolling desert.

Soil, sandy.

No timber.

Undergrowth, shadscale and salt grass.

S. 89° 23' W., along the S. bdy. of sec. 31.

Over nearly level desert land, through shadscale and salt grass.

20.20 Improved dirt road to dinosaur quarry, bears N. 25° W. and S. 25° E.

39.74 The $\frac{1}{4}$ sec. cor. of sec. 31, which is monumented with a shalestone, 18x10x2 ins., firmly set and plainly mkd. $\frac{1}{2}$ on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 20 ins. in the ground, with brass cap mkd.

T17S R10E

$\frac{1}{2}$ S31

T18S R10E

1969

Bury orig. stone cor. alongside iron post.

No accessories available.

Cor. falls in a fence, bearing N. 55° 30' W. and S. 55° 30' E.

S. 89° 05' W., beginning new measurement.

15.10 Small spur, slopes S.

40.80 The cor. of Tps. 17 and 18 S., Rs. 9 and 10 E., an iron post, 2 $\frac{1}{2}$ ins. diam., set, mkd. and witnessed as described in the field notes of T. 17 S., R. 9 E. surveyed concurrently under this same group.

Land, nearly level desert.

Soil, sandy.

No timber.

Undergrowth, shadscale and salt grass.

Dependent Resurvey of a Portion of the Subdivisional Lines, Township 17 South, Range 10 East

Reestablishment of the Survey
Executed by J. T. Breckon in 1891.

Dependent Resurvey, T. 17 S., R. 10 E.

CHAINS

From the cor. of secs. 1, 2, 35 and 36, on the S. bdy. of the Tp.

N. 0° 17' W., bet. secs. 35 and 36.

Over rolling desert land, through shadscale and dense scrub timber.

4.50 Wash, drains NW.

21.20 Wash, 30 lks. wide, 3 ft. deep, drains irregularly S. 60° W.

25.00 Leave dense timber; enter scattered timber.

40.33 The $\frac{1}{4}$ sec. cor. of secs. 35 and 36, which is monumented with a sandstone, 22x8x6 ins., firmly set and plainly mkd. $\frac{1}{4}$ on W. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T17S R10E

$\frac{1}{4}$

S35|S36

1969

Bury orig. stone cor. alongside iron post.

Raise a mound of stone, $2\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

N. 0° 42' W., beginning new measurement.

19.00 Main draw, drains irregularly N. 35° W.

38.15 Draw, drains irregularly W.

39.88 Point for the cor. of secs. 25, 26, 35 and 36 at proportionate distance. There is no remaining evidence of the orig. cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T17S R10E

S26|S25

S35|S36

1969

Raise a mound of stone, $2\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, S. of cor.

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.

Land, rolling desert.

Soil, sandy.

Timber, dense to widely scattered juniper.

Undergrowth, shadscale and salt grass.

Dependent Resurvey, T. 17 S., R. 10 E.

CHAINS

From the cor. of secs. 25, 30, 31 and 36 on the E. bdy. of the Tp.

N. 89° 33' W., bet. secs. 25 and 36.

Over rolling desert land, through shadscale and salt grass along S. side of fence.

- 1.30 Wash, drains NW.; asc. 80 ft. over an E. slope.
 8.00 Enter dense timber.
 20.00 Leave timber; desc. 50 ft. over W. slope.
 25.00 Fence, bears E. and N. 75° W.
 29.00 Trail road, bears irregularly E. and W.; asc. 30 ft. over E. slope.
 37.50 Ridge, bears NE. and SW.; desc. 45 ft. over W. slope.
 40.25 The $\frac{1}{2}$ sec. cor. of secs. 25 and 36, which is monumented with a sandstone, 16x14x5 ins., firmly set and plainly mkd. $\frac{1}{2}$ on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 4 ins. in the ground to solid rock and in a mound of stone, 5 ft. base to top, with brass cap mkd.

T17S R10E

$\frac{1}{2}$ S25
 S36

1969

Bury orig. stone cor. alongside iron post.

S. 89° 32' W., beginning new measurement.

Asc. 60 ft. over E. slope.

- 9.15 Spur, slopes N.; desc. 95 ft. over W. slope.
 13.15 Draw, drains irregularly N.
 15.15 Top of ridge, bears N. and S.
 35.95 Ridge, slopes S.; enter widely scattered timber.
 40.23 The cor. of secs. 25, 26, 35 and 36.

Land, rolling desert.

Soil, sandy.

Timber, dense to widely scattered scrub juniper.

Undergrowth, shadscale and salt grass.

N., bet. secs. 25 and 26.

Over rolling desert land, through shadscale, salt grass and widely scattered scrub timber; asc. 20 ft. over S. slope.

- 1.20 Ridge, bears E. and W.; desc. 120 ft. over N. slope.

Dependent Resurvey, T. 17 S., R. 10 E.

CHAINS

- 16.20 Fence, bears N. 60° W. and S. 60° E.
- 33.00 Wash, drains W.; asc. 75 ft. over a S. slope.
- 36.20 Ridge, bears E. and W.; desc. 15 ft. over N. slope.
- 39.88 The $\frac{1}{2}$ sec. cor. of secs. 25 and 26, which is monumented with a sandstone, 15x10x6 ins., firmly set and plainly mkd. $\frac{1}{2}$ on W. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins. in the ground to solid rock and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T17S R10E

$\frac{1}{2}$
S26 | S25

1969

Bury orig. stone cor. alongside iron post.

N. 0° 07' W., beginning new measurement.

Desc. 120 ft. over N. slope.

- 13.70 Draw, drains irregularly W.
- 15.60 Spur, slopes W.
- 18.00 Draw, drains irregularly W.
- 21.00 Ridge, bears E. and W.
- 39.00 Asc. 90 ft. over S. slope.
- 39.87 Point for the cor. of secs. 23, 24, 25 and 26 at proportionate distance. There is no remaining evidence of the orig. corner.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T17S R10E

S23 | S24
S26 | S25

1969

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.

Cor. falls on steep S. slope.

Land, rolling desert.
Soil, sandy clay.
Timber, widely scattered scrub juniper.
Undergrowth, shadscale and salt grass.

From the cor. of secs. 19, 24, 25 and 30, on the E. bdy. of the Tp.

CHAINS	
	<p>S. 89° 15' W., bet. secs. 24 and 25.</p> <p>Over rolling desert land, through widely scattered scrub timber.</p>
1.40	Small wash, drains irregularly N.
3.60	Small spur, slopes N.; desc. 60 ft. over W. slope.
34.89	Bottom of canyon, drains N.; asc. 85 ft. over steep E. slope.
40.65	<p>The $\frac{1}{4}$ sec. cor. of secs. 24 and 25, which is monumented with a sandstone, 14x8x6 ins., firmly set and plainly mkd. $\frac{1}{4}$ on N. face.</p> <p>At the cor. point</p> <p>Set an iron post, 30 ins. long, 2$\frac{1}{2}$ ins. diam., 20 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T17S R10E</p> <p>$\frac{1}{4}$ $\frac{S24}{S25}$</p> <p>1969</p> </div> <p>Bury orig. stone cor. alongside iron post.</p> <p>Raise a mound of stone, 2$\frac{1}{2}$ ft. base, 1$\frac{1}{2}$ ft. high, N. of cor.</p> <p>Cor. falls on steep E. slope.</p>
	<hr/> <p>N. 89° 08' W., beginning new measurement.</p> <p>Asc. 60 ft. over steep E. slope.</p>
2.26	Enter dense scrub timber, top of ridge, slopes N.; desc. 150 ft. over W. slope.
20.00	Wash, drains N. 70° W.
29.86	Wash, 10 lks. wide, 1 ft. deep, drains irregularly N. 20° E.; asc. 50 ft. over E. slope.
39.00	Top of ridge.
39.68	The cor. of secs. 23, 24, 25 and 26.
	<p>Land, rolling desert.</p> <p>Soil, sandy clay.</p> <p>Timber, dense to widely scattered scrub juniper.</p> <p>No undergrowth.</p>
	<p>N. 0° 22' E., bet. secs. 23 and 24.</p> <p>Over rolling desert land, through shadescale, salt grass and scattered scrub timber; desc. 180 ft. over N. slope.</p>
23.00	Leave timber, enter flat.

Dependent Resurvey, T. 17 S., R. 10 E.

CHAINS

25.00

Trail road, bears irregularly N. 45° E. and S. 45° W.

39.87

The $\frac{1}{4}$ sec. cor. of secs. 23 and 24, which is monumented with a sandstone, 24x12x8 ins., loosely set and plainly mkd. $\frac{1}{4}$ on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., over an X chiseled in solid rock and in a mound of stone, 5 ft. base to top, with brass cap mkd.

T17S R10E

$\frac{1}{4}$

S23|S24

1969

Set orig. stone cor. alongside iron post.

N. 0° 20' E., beginning new measurement.

6.50

Wash, 60 lks. wide, 5 ft. deep, drains irregularly N. 30° E.

39.96

The cor. of secs. 13, 14, 23 and 24, which is monumented with a sandstone, 16x12x6 ins., firmly set and plainly mkd. 3 notches on S. and 1 notch on E. edges.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T17S R10E

S14|S13

S23|S24

1969

Bury orig. stone cor. alongside iron post.

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.

From this cor., cor. No. 1 of the B.T.W. lode, Mineral Survey No. 6925, bears S. 61° 58' E., 19.89 chs. dist., which is monumented by a wood stake, 18x4x4 ins., mostly rotted away, lying loose on top of the ground and dimly mkd. 6925. No other mineral survey corner found.

Land, level to rolling hills.

Soil, sandy.

Timber, scattered scrub juniper.

Undergrowth, shadscale and salt grass.

From the cor. of secs. 13, 18, 19 and 24, on the E. bdy. of the Tp.

S. 89° 01' W., bet. secs. 13 and 24.

Dependent Resurvey, T. 17 S., R. 10 E.

CHAINS	
	Over rolling rocky desert land, through scattered timber; asc. 25 ft. over E. slope.
.60	Rocky ridge, bears N. and S.; desc. 90 ft. over gentle W. slope.
15.00	Leave timber.
27.18	Wash, 40 lks. wide, 3 ft. deep, drains irregularly N. 10° W.; asc. 20 ft. over E. slope.
34.27	Unimproved dirt road, bears irregularly N. 20° E. and S. 20° W.
34.57	Small spur, bears N. and S.; desc. 30 ft. over W. slope into flat.
36.50	Enter flat.
39.57	The ½ sec. cor. of secs. 13 and 24, which is monumented with a sandstone, 16x10x3 ins., firmly set and plainly mkd. ½ on N. face.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	<p>T17S R10E</p> <p>½ $\frac{S13}{S24}$</p> <p>1969</p>
	Bury orig. stone cor. alongside iron post.
	No accessories available.

	S. 89° 31' W., beginning new measurement.
10.25	Unimproved dirt road, bears irregularly N. 30° E. and S. 30° W.
10.50	Wash, 50 lks. wide, 8 ft. deep, drains irregularly N. 10° W.
39.93	The cor. of secs. 13, 14, 23 and 24.
	Land, rolling and rocky desert. Soil, rocky, sandy clay. Timber, scattered scrub juniper. Undergrowth, shadscale and salt grass.
	N. 1° 04' W., bet. secs. 13 and 14.
	Over nearly level desert land, through shadscale and salt grass.
7.50	Improved dirt road to dinosaur quarry, bears E. and W.

Dependent Resurvey, T. 17 S., R. 10 E.

CHAINS

7.86 Fence, bears E. and W.

40.46 The $\frac{1}{2}$ sec. cor. of secs. 13 and 14, which is monumented with a sandstone, 18x6x5 ins., loosely set and dimly mkd. $\frac{1}{2}$ on W. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T17S R10E

 $\frac{1}{2}$
S14|S13

1969

Bury orig. stone cor. alongside iron post.

No accessories available.

N. 0° 26' W., beginning new measurement.

40.86 The cor. of secs. 11, 12, 13 and 14, which is monumented with a sandstone, 20x16x5 ins., firmly set and plainly mkd. 4 notches on S. and 1 notch on E. edges. U. S. Bureau of Sport Fisheries and Wildlife cor. marker set alongside orig. stone cor., with brass cap set in concrete mkd.

NO 8

11|12

14|13

T17S R10E

BDRY

1967

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T17S R10E

S11|S12

S14|S13

1969

Bury orig. stone cor. alongside iron post.

Turned U. S. Bureau of Sport Fisheries and Wildlife cor. marker upside down and buried alongside iron post.

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.

Land, nearly level desert.

Soil, sandy.

No timber.

Undergrowth, shadscale and salt grass.

Dependent Resurvey, T. 17 S., R. 10 E.

CHAINS

From the cor. of secs. 7, 12, 13 and 18 on the E. bdy. of the Tp.

S. 88° 55' W., bet. secs. 12 and 13.

Over rolling desert land, through greasewood, shadscale and salt grass.

- 7.55 Wash, 10 lks. wide, 1 ft. deep, drains N. 20° W.
- 13.55 Trail road, bears N. 70° E. and S. 70° W.
- 35.45 Wash, 25 lks. wide, 8 ft. deep, drains irregularly N.
- 40.03 The $\frac{1}{4}$ sec. cor. of secs. 12 and 13, which is monumented with a sandstone, 17x14x4 ins., firmly set and plainly mkd. $\frac{1}{2}$ on N. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T17S R10E

$\frac{1}{4}$ $\frac{S12}{S13}$

1969

Bury orig. stone cor. alongside iron post.

Raise a mound of stone, $2\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, N. of corner.

S. 89° 13' W., beginning new measurement.

- 4.14 Old irrigation ditch, drains N. 45° W.
- 20.16 Drainage ditch, drains N. 45° W.
- 20.27 Point for the W. 1/16 sec. cor. of secs. 12 and 13.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T17S R10E

W1/16 $\frac{S12}{S13}$

1969

- 22.50 Trail road, bears NW. and SE.
- 40.54 The cor. of secs. 11, 12, 13 and 14.

Land, rolling desert.

Soil, sandy.

No timber.

Undergrowth, greasewood, shadscale and salt grass.

N. 0° 16' W., bet. secs. 11 and 12.

Dependent Resurvey, T. 17 S., R. 10 E.

CHAINS

Over gently rolling desert land, through shadscale and salt grass.

18.35 Trail road, bears N. 50° W. and S. 50° E.

22.50 Irrigation ditch, drains N. 88° W.

38.00 Fence, bears N. 10° W. and S. 10° E.

40.92 Point for the $\frac{1}{4}$ sec. cor. of secs. 11 and 12 at proportionate distance. There is no remaining evidence of the orig. corner.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T17S R10E

$\frac{1}{4}$
S11|S12

1969

From which,

A $\frac{3}{4}$ in. pipe, bears South, 27.5 lks. dist., mkd. 2A1, a temporary cor. established by the U. S. Bureau of Sport Fisheries and Wildlife.

52.25 Stream, flows irregularly E.

71.65 Fence, bears N. 5° W. and S. 5° E.

76.72 Improved dirt road, bears N. 70° E. and S. 70° W.

81.84 The cor. of secs. 1, 2, 11 and 12, which is monumented with a sandstone, 18x12x4 ins., firmly set and dimly mkd. 1 notch on E. and 5 notches on S. edges.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground, with brass cap mkd.

T17S R10E

S2|S1
S11|S12

1969

Bury orig. stone cor. alongside iron post.

A $\frac{3}{4}$ in. pipe set alongside iron post, mkd. 1A12, a temporary cor. established by the U. S. Bureau of Sport Fisheries and Wildlife.

Cor. falls in fence bearing N. 3° E. and S. 3° W.

Land, gently rolling desert.

Soil, sandy clay.

No timber.

Undergrowth, shadscale and salt grass.

From the cor. of secs. 1, 6, 7 and 12 on the E. bdy. of the Tp.

Dependent Resurvey, T. 17 S., R. 10 E.

CHAINS

S. 89° 28' W., bet. secs. 1 and 12.

Over nearly level desert land, through shadscale and salt grass.

24.35 Unimproved dirt road, bears irregularly N. 60° E. and S. 60° W.

38.35 Unimproved dirt road, bears irregularly N. 40° W. and S. 40° E.

39.72 The 1/4 sec. cor. of secs. 1 and 12 determined by the cor. of an old fence bearing S. and W., and is accepted as the best existing evidence of the position of the orig. cor.

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.

T17S R10E
 1/4 ——— S1
 S12
 1969

S. 89° 39' W., beginning new measurement.

1.28 Small spur, bears NW. and SE.

6.30 Fence, bears irregularly N. 70° E. and S. 70° W.

26.90 Unimproved dirt road, bears irregularly N. 60° E. and S. 60° W.

40.61 The cor. of secs. 1, 2, 11 and 12.

Land, nearly level desert.
 Soil, sandy clay.
 No timber.
 Undergrowth, shadscale and salt grass.

N. 1° 02' W., bet. secs. 1 and 2.

Over gently rolling desert land, through shadscale and salt grass.

18.00 Improved dirt road, bears N. 44° E. and S. 44° W.

32.50 Wash, 20 lks. wide, 5 ft. deep, drains S. 48° E.

40.87 The 1/4 sec. cor. of secs. 1 and 2, which is monumented with a sandstone, 14x5x3 ins., loosely set and plainly mkd. 1/4 on W. face.

At the cor. point

Dependent Resurvey, T. 17 S., R. 10 E.

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground, with brass cap mkd.

T17S R10E

 $\frac{1}{2}$
S2|S1

1969

Bury orig. stone cor. alongside iron post.

N. $0^{\circ} 14'$ W., beginning new measurement.

41.34 The cor. of secs. 1, 2, 35 and 36, on the N. bdy. of the Tp., monumented with an iron post, $2\frac{1}{2}$ " in diam., set, mkd. and witnessed as described in the field notes of T. 16 S., R. 10 E., surveyed concurrently under this same group.

Land, gently rolling desert.

Soil, sandy.

No timber.

Undergrowth, shadscale and salt grass.

From the cor. of secs. 2, 3, 34 and 35 on the S. bdy. of the Tp.

N. $0^{\circ} 08'$ W., bet. secs. 34 and 35.

Over rolling and broken canyon land, through shadscale and salt grass; desc. 60 ft. over NW. slope.

8.00 Bottom of canyon; asc. 95 ft. over S. slope.

14.60 Ridge, bears E. and W.; desc. 160 ft. over N. slope.

39.03 The $\frac{1}{4}$ sec. cor. of secs. 34 and 35, which is monumented with a sandstone, 15x8x5 ins., firmly set and plainly mkd. $\frac{1}{2}$ on W. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins. in the ground to solid rock and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T17S R10E

 $\frac{1}{2}$
S34|S35

1969

Bury orig. stone cor. alongside iron post.

N. $0^{\circ} 13'$ W., beginning new measurement.

.20 Small wash, drains NW.

Dependent Resurvey, T. 17 S., R. 10 E.

CHAINS	
18.40	Wash, 90 lks. wide, 1 ft. deep, drains irregularly S. 80° W.
22.90	Top of spur, bears NW. and SE.
37.00	Wash, 30 lks. wide, 1 ft. deep, drains irregularly N. 70° E.
40.25	<p>The cor. of secs. 26, 27, 34 and 35, which is monumented with a sandstone, 24x8x4 ins., loosely set and plainly mkd. 2 notches on E. and 1 notch on S. edges.</p> <p>At the cor. point</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T17S R10E <u>S27 S26</u> <u>S34 S35</u> 1969</p> </div> <p>Bury orig. stone cor. alongside iron post.</p> <p>Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.</p> <p>Land, rolling and broken canyon land. Soil, rocky, sandy clay. No timber. Undergrowth, shadscale and salt grass.</p>
	<p>From the cor. of secs. 25, 26, 35 and 36.</p> <p>N. 89° 55' W , bet. secs. 26 and 35.</p> <p>Over rolling desert land, through shadscale, salt grass and widely scattered timber; desc. 90 ft. over W. slope.</p> <p>4 60 Draw, drains irregularly N. 55° W.</p> <p>12.00 Draw, drains irregularly N. 45° W.</p> <p>32 25 Wash, 50 lks. wide, 3 ft. deep, drains irregularly N., asc. 35 ft. over E. slope.</p> <p>34 35 Ridge, bears N. and S.</p> <p>36 00 Draw, drains irregularly N.; leave timber.</p> <p>40.23 The ½ sec. cor. of secs. 26 and 35, which is monumented with a sandstone, 18x10x5 ins., firmly set and plainly mkd. ½ on N. face.</p> <p>At the cor. point</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>

Dependent Resurvey, T. 17 S., R. 10 E.

CHAINS

T17S R10E

 $\frac{1}{2}$ $\frac{S26}{S35}$

1969

Bury orig. stone cor. alongside iron post.

Raise a mound of stone, $2\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high,
N. of cor.S. $89^{\circ} 31'$ W., beginning new measurement.

Asc. 30 ft. over E. slope.

13.25 Ridge, bears N. and S., leave hills; desc. 85 ft. over
W. slope into flat.

38.60 Wash, 30 lks. wide, 3 ft. deep, drains irregularly N.

39.63 The cor. of secs. 26, 27, 34 and 35.

Land, rolling desert.

Soil, rocky, sandy clay.

Timber, widely scattered scrub juniper.

Undergrowth, shadscale and salt grass.

N. $0^{\circ} 17'$ W., bet. secs. 26 and 27.Over nearly level desert land, through shadscale and
salt grass.29.80 Wash, 20 lks. wide, 2 ft. deep, drains irregularly N.
 65° E.

36.00 Top of ridge, bears NE. and SW.

40.79 The $\frac{1}{2}$ sec. cor. of secs. 26 and 27, which is monumented
with a sandstone, $18 \times 9 \times 3$ ins., firmly set and plainly
mkd. $\frac{1}{2}$ on W. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins.
in the ground and in a collar of stone, with brass cap
mkd.

T17S R10E

 $\frac{1}{2}$ S27|S26

1969

Bury orig. stone cor. alongside iron post.

N. $0^{\circ} 19'$ W., beginning new measurement.20.50 Fence, bears S. 55° E. and N. 55° W.

Dependent Resurvey, T. 17 S., R. 10 E.

CHAINS

- 23.00 Wash, 15 lks. wide, 1 ft. deep, drains irregularly N. 85° E.
- 33.10 Wash, 10 lks. wide, 2 ft. deep, drains irregularly S. 30° E.
- 40.60 The cor. of secs. 22, 23, 26 and 27, which is monumented with a sandstone, 18x5x3 ins., firmly set and plainly mkd. 2 notches on the E. and S. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 2 ins. in the ground to solid rock and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T17S R10E

S22|S23
S27|S26

1969

Bury orig. stone cor. alongside iron post.

Set a steel fence post, 6 ft. long, 2 ins. in the ground, alongside iron post.

Land, nearly level desert.

Soil, sandy clay.

No timber.

Undergrowth, shadscale and salt grass.

From the cor. of secs. 23, 24, 25 and 26.

N. 88° 59' W., bet. secs. 23 and 26.

Over gently rolling desert land, through shadscale, salt grass and widely scattered scrub timber.

- 10.00 Wash, 75 lks. wide, 1 ft. deep, drains irregularly N. 10° W.
- 31.80 Leave timber.
- 35.00 Wash, 100 lks. wide, 25 ft. deep, drains irregularly N. 30° E.
- 39.05 Unimproved dirt road, bears irregularly N. 40° E. and S. 40° W.
- 39.72 The ¼ sec. cor. of secs. 23 and 26, which is monumented with a sandstone, 18x10x4 ins., loosely set and plainly mkd. ¼ on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground, with brass cap mkd.

T17S R10E

¼ — S23
S26

1969

Bury orig. stone cor. alongside iron post.

Dependent Resurvey, T. 17 S., R. 10 E.

CHAINS

Cor. falls on W. slope.

No accessories available.

N. 89° 02' W., beginning new measurement.

15.38 Wash, 20 lks. wide, 2 ft. deep, drains irregularly N. 30° E.

17.55 Wash, 50 lks. wide, 1 ft. deep, drains irregularly N. 20° E.

22.25 Wash, 30 lks. wide, 3 ft. deep, drains irregularly N. 70° E.

40.39 The cor. of secs. 22, 23, 26 and 27.

Land, gently rolling desert.

Soil, sandy clay.

Timber, widely scattered scrub juniper E. half.

Undergrowth, shadscale and salt grass.

N. 0° 03' W., bet. secs. 22 and 23.

Over rolling desert land, through shadscale and salt grass.

2.00 Asc. 110 ft. over steep S. slope.

19.50 Improved dirt road to dinosaur quarry, bears S. 40° W. and N. 40° E.; end steep ascent.

21.11 Top of rocky ridge, bears SW. and NE. End triangulation.

40.85 The $\frac{1}{4}$ sec. cor. of secs. 22 and 23, which is monumented with a sandstone, 19x12x6 ins., firmly set and plainly mkd. $\frac{1}{2}$ on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 20 ins. in the ground, with brass cap mkd.

T17S R10E

$\frac{1}{4}$

S22|S23

1969

Bury orig. stone cor. alongside iron post.

Raise a mound of stone, 2 $\frac{1}{2}$ ft. base, 1 $\frac{1}{2}$ ft. high, W. of corner.

N. 0° 11' W., beginning new measurement.

Desc. 70 ft. over N. slope.

Dependent Resurvey, T. 17 S., R. 10 E.

CHAINS

- 40.55 Point for the cor. of secs. 14, 15, 22 and 23 at proportionate distance. There is no remaining evidence of the orig. corner.
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.
- T17S R10E
 $\frac{S15}{S22} | \frac{S14}{S23}$
 1969
- Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.
- Land, rolling desert.
 Soil, sandy.
 No timber.
 Undergrowth, shadscale and salt grass.
-
- From the cor. of secs. 13, 14, 23 and 24.
- N. $87^{\circ} 54'$ W., bet. secs. 14 and 23.
- Over gently rolling desert land, through shadscale and salt grass; asc. 130 ft. over gentle E. slope.
- 11.20 Wash, 30 lks. wide, 4 ft. deep, drains irregularly S. 10° E.
- 36.39 Begin steep ascent.
- 38.38 Rocky ridge, bears N. and S.; end steep ascent.
- 38.70 Improved dirt road to dinosaur quarry, bears N. 50° E. and S. 50° W.
- 40.39 Point for the $\frac{1}{2}$ sec. cor. of secs. 14 and 23 at proportionate distance. There is no remaining evidence of the orig. corner.
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 12 ins. in the ground to solid rock and in a mound of stone, 5 ft. base to top, with brass cap mkd.
- T17S R10E
 $\frac{1}{2} \frac{S14}{S23}$
 1969
- 58.25 Small spur, bears NW. and SE.
- 69.55 Improved dirt road to dinosaur quarry, bears N. 10° W. and S. 10° E.
- 72.55 Wash, 90 lks. wide, 10 ft. deep, drains irregularly N. 10° W.
- 74.85 Wash, 40 lks. wide, 6 ft. deep, drains irregularly N. 20° W.
- 80.78 The cor. of secs. 14, 15, 22 and 23.

Dependent Resurvey, T. 17 S., R. 10 E.

CHAINS

Land, gently rolling desert.
Soil, rocky sandy clay.
No timber.
Undergrowth, shadscale and salt grass.

N. 0° 42' W., bet. secs. 14 and 15.

Over gently rolling desert land, through shadscale and salt grass; desc. 55 ft. over gentle N. slope.

24.00

Wash, drains N. 20° W.

39.42

Improved dirt road to dinosaur quarry, bears N. 12° W. and S. 12° E.

40.55

Point for the $\frac{1}{4}$ sec. cor. of secs. 14 and 15 at proportionate distance. There is no remaining evidence of the orig. corner.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T17S R10E

$\frac{1}{4}$

S15|S14

1969

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.

Cor. falls 20 lks. E. of an improved dirt road.

Desc. 75 ft. over gentle N. slope.

53.15

Wash, 50 lks. wide, 6 ft. deep, drains irregularly N. 70° E.

69.78

Wash, 20 lks. wide, 5 ft. deep, drains irregularly N. 35° E.

80.00

Fence, bears E. and W.

81.10

Point for the cor. of secs. 10, 11, 14 and 15 at proportionate distance. There is no remaining evidence of the orig. corner.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T17S R10E

S10|S11

S15|S14

1969

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.

From this cor., a U. S. Bureau of Sport Fisheries and Wildlife cor. marker, bears S. 3° 10' E., 112 lks. dist., with brass cap set in concrete, mkd.

NO 6

10|11

15|14

T17S R10E

BDRY

1967

Dependent Resurvey, T. 17 S., R. 10 E.

CHAINS

I destroyed all markings except NO 6 and 1967. I marked 1969 above 1967.

Land, gently rolling desert.
Soil, rocky, sandy clay.
No timber.
Undergrowth, shadscale and salt grass.

From the cor. of secs. 11, 12, 13 and 14.

N. 88° 05' W., bet. secs. 11 and 14.

Over gently rolling desert land, through shadscale and salt grass; asc. 55 ft. over gentle E. slope.

16.96 Wash, 2 chs. wide, 2 ft. deep, drains N. 15° W.

36.44 Fence, bears N. and S.

40.29 Fence, bears N. and S. 551ks.; thence W.

40.40 The $\frac{1}{4}$ sec. cor. of secs. 11 and 14, which is monumented with a broken sandstone, bottom portion still firmly set, $\frac{1}{2}$ still identifiable on a portion of the broken sandstone (record calls for a sandstone, 15x10x4 ins.).

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 12 ins. in the ground to solid rock and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T17S R10E

$\frac{1}{4}$ $\frac{S11}{S14}$

1969

Bury orig. stone cor. alongside iron post.

Set a steel fence post, 6 ft. long, 1 ft. in the ground, alongside iron post.

From this cor., a U. S. Bureau of Sport Fisheries and Wildlife cor. marker, bears S. 11° 31' E., 58 lks. dist., with brass cap set in concrete, mkd.

NO 7

$\frac{1}{4}$ $\frac{11}{14}$

T17S R10E

BDRY

1967

I destroyed all markings except NO 7 and 1967. I marked 1969 above 1967.

The U. S. Bureau of Sport Fisheries and Wildlife cor. is in a fence bearing N. and W.

N. 88° 03' W., beginning new measurement.

Dependent Resurvey, T. 17 S., R. 10 E.

CHAINS

Asc. 35 ft. over rolling E. slope, along N. side of fence.

8.80 Draw, drains N. 28° W.

20.30 Draw, drains N. 41° W., 5.00 chs.; thence irregularly N.

32.43 Draw, drains N. 30° E.

40.21 The cor. of secs. 10, 11, 14 and 15.

Land, gently rolling desert.

Soil, sandy clay.

No timber.

Undergrowth, shadscale and salt grass.

N. 0° 13' W., bet. secs. 10 and 11 for control purposes.

Over gently rolling desert land, through shadscale and salt grass.

.20 Wash, 20 lks. wide, 2 ft. deep, drains irregularly N. 45° E.

6.35 Top of small ridge, bears E. and W.; desc. 90 ft. over gentle N. slope.

7.90 Improved dirt road, bears N. 25° E. and S. 25° W.

19.00 Improved dirt road, bears N. 75° W. and S. 75° E.

39.40 Wash, 20 lks. wide, 2 ft. deep, drains irregularly N. 20° E.

40.55 The $\frac{1}{4}$ sec. cor. of secs. 10 and 11, which is monumented with a broken sandstone, bottom portion still firmly set, a portion, 6x6x2 ins., plainly mkd. $\frac{1}{4}$ (record calls for a sandstone, 20x12x6 ins.).

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T17S R10E

$\frac{1}{4}$

S10|S11

1969

Bury orig. stone cor. alongside iron post.

Corner falls on a gentle SE. slope.

From the cor. of secs. 3, 4, 33 and 34 on the S. bdy. of the Tp.

N. 0° 53' E., bet. secs. 33 and 34.

Dependent Resurvey, T. 17 S., R. 10 E.

CHAINS

Over nearly level desert land, through shadscale and sagebrush.

- 8.35 Wash, 20 lks. wide, 10 ft. deep, drains N. 28° W.
- 10.30 Wash, 120 lks. wide, 10 ft. deep, drains N. 47° E.
- 18.80 Wash, 40 lks. wide, 8 ft. deep, drains S. 80° E.
- 39.05 Wash, 7 lks. wide, 2 ft. deep, drains S. 82° E.
- 40.26 Point for the $\frac{1}{2}$ sec. cor. of secs. 33 and 34 at proportionate distance. There is no remaining evidence of the orig. corner.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T17S R10E

$\frac{1}{2}$
S33|S34

1969

No accessories available.

- 58.00 Wash, 10 lks. wide, 3 ft. deep, drains N. 73° E.
- 80.52 The cor. of secs. 27, 28, 33 and 34, which is monumented with a sandstone, 14x6x4 ins., firmly set and plainly mkd. 3 notches on E. and 1 notch on S. edges.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground and in a collar of stone, with brass cap mkd.

T17S R10E

S28|S27
S33|S34

1969

Bury orig. stone corner alongside iron post.

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.

Land, nearly level desert.
Soil, sandy clay.
No timber.
Undergrowth, shadscale and sagebrush.

From the cor. of secs. 26, 27, 34 and 35.

Dependent Resurvey, T. 17 S., R. 10 E.

CHAINS

N. 88° 07' W., bet. secs. 27 and 34.

Over nearly level desert land, through shadscale and salt grass.

5.00 Trail road, bears irregularly N. and S.

20.20 Wash, 30 lks. wide, 3 ft. deep, drains irregularly N.

26.45 Wash, 30 lks. wide, 2 ft. deep, drains irregularly N.

31.70 Wash, 20 lks. wide, 3 ft. deep, drains irregularly N.

37.85 Wash, 30 lks. wide, 4 ft. deep, drains irregularly N. 35° E.

39.25 Point for the $\frac{1}{4}$ sec. cor. of secs. 27 and 34 at proportionate distance. There is no remaining evidence of the orig. corner.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T17S R10E

$\frac{1}{4}$ $\frac{S27}{S34}$

1969

No accessories available.

51.60 Trail road, bears irregularly N. 67° W. and S. 67° E.

78.50 The cor. of secs. 27, 28, 33 and 34.

Land, nearly level desert.

Soil, sandy clay.

No timber.

Undergrowth, shadscale and salt grass.

N. 1° 44' W., bet. secs. 27 and 28.

Over nearly level desert land, through shadscale and salt grass.

8.55 Fence, bears N. 52° 25' E. and S. 52° 25' W.

17.60 Improved dirt road to dinosaur quarry, bears N. 50° E. and S. 50° W.

40.47 Point for the $\frac{1}{4}$ sec. cor. of secs. 27 and 28 at proportionate distance. There is no remaining evidence of the orig. corner.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T17S R10E

$\frac{1}{4}$ $\frac{S28}{S27}$

1969

No accessories available.

Dependent Resurvey, T. 17 S., R. 10 E.

CHAINS

- 47.65 Draw, drains N. 13° E.
- 60.705 Point for the N. 1/16 sec. cor. of secs. 27 and 28.
Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
- T17S R10E
N
1/16
S28|S27
1969
- No accessories available.
- 72.35 Wash, 20 lks. wide, 4 ft. deep, drains N. 33° W.
- 80.94 Point for the cor. of secs. 21, 22, 27 and 28 at proportionate distance. There is no remaining evidence of the orig. corner.
Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
- T17S R10E
S21|S22
S28|S27
1969
- Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.
- Land, nearly level desert.
Soil, sandy clay.
No timber.
Undergrowth, shadscale and salt grass.
-
- From the cor. of secs. 22, 23, 26 and 27.
N. 88° 48' W., bet. secs. 22 and 27.
Over nearly level desert land, through shadscale and salt grass.
- 8.50 Wash, 15 lks. wide, 1 ft. deep; drains irregularly S. 10° E.
- 10.10 Fence, bears N. 10° W. and S. 10° E.
- 13.00 Small ridge, bears NE. and SW.
- 14.00 Improved dirt road to dinosaur quarry, bears NE. and SW.
- 37.65 Wash, 30 lks. wide, 5 ft. deep, drains irregularly N. 10° E.
- 40.51 The ¼ sec. cor. of secs. 22 and 27, which is monumented with a sandstone, 18x8x6 ins., loosely set and plainly mkd. ¼ on N. face.
At the cor. point

Dependent Resurvey, T. 17 S., R. 10 E.

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground, with brass cap mkd.

T17S R10E

$\frac{1}{4}$ $\frac{S22}{S27}$

1969

Bury orig. stone cor. alongside iron post.

No accessories available.

N. $88^{\circ} 09'$ W., beginning new measurement.

- 1.31 Small spur, slopes N.
- 20.50 Wash, 10 lks. wide, 1 ft. deep, drains irregularly N. 20° W.
- 20.70 Wash, 30 lks. wide, 2 ft. deep, drains irregularly N. 30° E.
- 32.50 Wash, 20 lks. wide, 2 ft. deep, drains irregularly N. 5° W.
- 40.05 The cor. of secs. 21, 22, 27 and 28.
- Land, nearly level desert.
Soil, sandy clay.
No timber.
Undergrowth, shadscale and salt grass.

N. $1^{\circ} 17'$ W., bet. secs. 21 and 22.

Over nearly level desert land, through shadscale and salt grass.

- 19.00 Draw, drains N. 40° W.
- 39.00 Wash, drains N. 20° W.
- 40.46 The $\frac{1}{4}$ sec. cor. of secs. 21 and 22, determined by the cor. of an old fence, fence bearing W., N. and S. This position is harmoniously related to existing orig. cors., has long been recognized as the cor. by adjacent land owners, and is accepted as the best existing evidence of the position of the original corner.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T17S R10E

$\frac{1}{4}$ S21|S22

1969

No accessories available.

238

Dependent Resurvey, T. 17 S., R. 10 E.

CHAINS

N. 0° 06' E., beginning new measurement.

- 13.40 Wash, 15 lks. wide, 5 ft. deep, drains N. 50° W.
- 32.85 Enter willows and cattails in bottom land; small stream drains irregularly NE.
- 36.50 Same small stream drains irregularly NW.
- 40.11 The cor. of secs. 15, 16, 21 and 22, determined latitudinally by proportionate measurement and longitudinally by an old fence bearing N. and S.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T17S R10E

S16|S15

S21|S22

1969

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.

From this cor., a ¾ in. pipe, bears N. 11° 23' E., 83 lks. dist., mkd. 5A1. A temporary cor. established by the U. S. Bureau of Sport Fisheries and Wildlife.

Land, nearly level desert.

Soil, sandy clay.

No timber.

Undergrowth, shadscale and salt grass.

From the cor. of secs. 14, 15, 22 and 23.

N. 87° 53' W., bet. secs. 15 and 22.

Over nearly level desert land, through shadscale and salt grass.

- 8.65 Wash, 20 lks. wide, 3 ft. deep, drains irregularly N. 30° W.
- 10.75 Wash, 40 lks. wide, 2 ft. deep, drains irregularly N. 10° W.
- 35.50 Wash, 25 lks. wide, 1 ft. deep, drains irregularly N. 10° W.
- 40.37 The ¼ sec. cor. of secs. 15 and 22, which is monumented with a sandstone, 12x12x4 ins., firmly set and dimly mkd. ½ on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

Dependent Resurvey, T. 17 S., R. 10 E.

CHAINS

T17S R10E

$$\frac{1}{2} \begin{array}{r} S15 \\ S22 \end{array}$$

1969

Bury orig. stone cor. alongside iron post.

No accessories available.

S. 89° 52' W., beginning new measurement.

11.40 Wash, 60 lks. wide, 1 ft. deep, drains irregularly N. 50° W.

20.41 Point for the W1/16 sec. cor. of secs. 15 and 22.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T17S R10E

$$W1/16 \begin{array}{r} S15 \\ S22 \end{array}$$

1969

No accessories available.

39.00 Enter willows and cattails in bottomland.

40.82 The cor. of secs. 15, 16, 21 and 22.

Land, nearly level desert.

Soil, sandy clay.

No timber.

Undergrowth, shadscale and salt grass.

N. 0° 08' W., bet. secs. 15 and 16.

Over nearly level bottomland, through willows and cattails.

11.60 Small stream, drains N. 53° E.

26.10 Leave bottomland, leave cattails and willows; enter shadscale and salt grass.

40.11 Point for the ¼ sec. cor. of secs. 15 and 16 at proportionate distance. The original sandstone cor., 10x8x6 ins., laying loose on top of ground. There is no remaining evidence of original position of the corner.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T17S R10E

$$\frac{1}{4} \begin{array}{r} S16 \\ S15 \end{array}$$

1969

Bury orig. stone cor. alongside iron post.

Dependent Resurvey, T. 17 S., R. 10 E.

CHAINS

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.

From this cor., a 3/4 in. pipe bears N. 4° 42' E., 85.5 lks. dist., mkd. 4A1. A temporary corner established by the U. S. Bureau of Sport Fisheries and Wildlife. Temporary corner set in a new fence corner, fences bearing N. and W. Fence was built after the temporary corner was established.

78.00 Draw, drains N. 30° E.

80.22 The cor. of secs. 9, 10, 15 and 16, which is monumented with a broken sandstone, bottom portion still firmly set, markings still identifiable on a portion of the broken sandstone (record calls for a sandstone 24x8x6 ins.). A. U. S. Bureau of Sport Fisheries and Wildlife cor. marker set alongside orig. stone cor., with brass cap set in concrete mkd.

NO 4
9/10
 16|15
 T17S R10E
 BDRY
 1967

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T17S R10E
S9|S10
 S16|S15
 1969

Bury orig. stone cor. alongside iron post.

Cor. set in a fence corner. Fences bearing S. and E.

Turn U. S. Bureau of Sport Fisheries and Wildlife cor. marker upside down and bury alongside iron post.

Land, nearly level desert.

Soil, sandy clay.

No timber.

Undergrowth, willows, cattails, shadscale and salt grass.

From the cor. of secs. 10, 11, 14 and 15.

N. 89° 39' W., bet. secs. 10 and 15.

Over nearly level desert land, through shadscale and salt grass.

.20 Draw, drains N. 45° E.

5.35 Improved dirt road, bears irregularly N. 5° E. and S. 5° W.

Dependent Resurvey, T. 17 S., R. 10 E.

CHAINS

20.65 Draw, drains N. 3° W.

38.65 Draw, drains N.

40.18 Point for the $\frac{1}{2}$ sec. cor. of secs. 10 and 15 at proportionate distance. There is no remaining evidence of the orig. corner.Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T17S R10E

$$\frac{1}{2} \frac{S10}{S15}$$

1969

From this cor., a U. S. Bureau of Sport Fisheries and Wildlife cor. marker, bears S. 2° 34' E., 58 lks. dist., with brass cap set in concrete, mkd.

NO 5

$$\frac{10}{15}$$

T17S R10E

BDRY

1967

I destroyed all markings except NO 5 and 1967. I marked 1969 above 1967.

The U. S. Bureau of Sport Fisheries and Wildlife cor. is in a fence bearing E. and W.

43.35 Draw, drains N. 15° E.

60.27 Point for the W. 1/16 sec. cor. of secs. 10 and 15.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T17S R10E

$$W1/16 \frac{S10}{S15}$$

1969

No accessories available.

80.36 The cor. of secs. 9, 10, 15 and 16.

Land, nearly level desert.

Soil, sandy clay.

No timber.

Undergrowth, shadscale and salt grass.

Reestablishment of the Survey Executed by
A. D. Ferron in 1880.From the cor. of secs. 4, 5, 32 and 33 on the S. bdy.
of the Tp.

N. 0° 06' W., bet. secs. 32 and 33.

Dependent Resurvey, T. 17 S., R. 10 E.

CHAINS

Over nearly level desert land, through shadscale and salt grass.

- 1.00 Trail road, bears N. 30° W. and S. 30° E.
- 5.50 Improved dirt road to dinosaur quarry, bears N. 38° E. and S. 38° W. Enter rocky ground.
- 24.70 Wash, 15 lks. wide, 4 ft. deep, drains W.
- 40.12 The $\frac{1}{4}$ sec. cor. of secs. 32 and 33, which is monumented with a sandstone, 10x10x3 ins., firmly set and plainly mkd. $\frac{1}{4}$ on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to solid rock and in a mound of stone, 3½ ft. base to top, with brass cap mkd.

T17S R10E

$\frac{1}{4}$
S32 S33

1969

Bury orig. stone cor. alongside iron post.

No accessories available.

N. 2° 51' W., beginning new measurement.

- 5.90 Wash, 10 lks. wide, 3 ft. deep, drains N. 49° W.
- 11.40 Fence, bears N. 54° W. and S. 54° E.
- 38.64 The cor. of secs. 28, 29, 32 and 33, which is monumented with a sandstone, 15x12x2 ins., firmly set and plainly mkd. 1 notch on S. and 4 notches on E. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T17S R10E

S29 | S28
S32 | S33

1969

Bury orig. stone cor. alongside iron post.

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.

Land, nearly level desert.
Soil, sandy, rocky clay.
No timber.
Undergrowth, shadscale and salt grass.

From the cor. of secs. 27, 28, 33 and 34.

Dependent Resurvey, T. 17 S., R. 10 E.

CHAINS

S. 88° 19' W., bet. secs. 28 and 33.

Over nearly level desert land, through shadscale and salt grass.

10.25

Fence, bears N. 45° E. and S. 45° W.

24.65

Improved dirt road to dinosaur quarry, bears N. 50° E. and S. 50° W.

41.69

Point for the $\frac{1}{4}$ sec. cor. of secs. 28 and 33 at proportionate distance. There is no remaining evidence of the orig. corner.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 12 ins. in the ground to solid rock and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T17S R10E

$$\frac{1}{4} \frac{S28}{S33}$$

1969

44.50

Wash, 35 lks. wide, 5 ft. deep, drains irregularly N.

62.535

Point for the W. $\frac{1}{16}$ sec. cor. of secs. 28 and 33.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground, with brass cap mkd.

T17S R10E

$$W\frac{1}{16} \frac{S28}{S33}$$

1969

No accessories available.

74.20

Wash, 30 lks. wide, 3 ft. deep, drains irregularly N. 45° W. 1.50 chs.; thence S. 45° W.

79.50

Same wash, 30 lks. wide, 3 ft. deep, drains irregularly N. 35° W., from NE.

83.38

The cor. of secs. 28, 29, 32 and 33.

Land, nearly level desert.

Soil, rocky, sandy clay.

No timber.

Undergrowth, shadscale and salt grass.

N. 1° 17' E., bet. secs. 28 and 29.

Over nearly level desert land, through shadscale and salt grass.

1.85

Wash, 20 lks. wide, 1 ft. deep, drains N. 25° W.

21.255

Point for the S. $\frac{1}{16}$ sec. cor. of secs. 28 and 29.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

Dependent Resurvey, T. 17 S., R. 10 E.

CHAINS

T17S R10E
 S
 1/16
 S29|S28
 1969

No accessories available.

35.00 Irrigation ditch, drains N. 45° E.

42.51 The $\frac{1}{4}$ sec. cor. of secs. 28 and 29, which is monumented with a sandstone, 10x8x3 ins., firmly set and plainly mkd. $\frac{1}{4}$ on W. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T17S R10E
 $\frac{1}{4}$
 S29|S28
 1969

No accessories available.

N. 0° 32' W., beginning new measurement.

2.55 Enter cultivated land.

20.65 Leave cultivated land.

29.20 Wash, drains NE.

40.25 The cor. of secs. 20, 21, 28 and 29 determined by the intersection of two old roads bearing N., S., E. and W., with fences on either side. Mr. Vernon Allred, an adjacent land owner said that when the roads were put in they measured out one rod in all four directions from the cor. and established the fence corners. Using the old fence corners I reestablished the position of the orig. cor.; orig. stone cor. lost due to the building of the roads. These roads are no longer in use.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T17S R10E
 S20|S21
 S29|S28
 1969

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.

Land, nearly level desert.

Soil; sandy clay.

No timber.

Undergrowth, shadscale and salt grass.

From the cor. of secs. 21, 22, 27 and 28.

Dependent Resurvey, T. 17 S., R. 10 E.

CHAINS

- S. 89° 34' W., bet. secs. 21 and 28.
Over nearly level desert land, through shadscale and salt grass.
- 4.25 Draw, drains N.
- 20.20 Draw, drains N. 17° W.
- 26.25 Enter cultivated land.
- 38.00 Leave cultivated land.
- 40.13 Point for the $\frac{1}{4}$ sec. cor. of secs. 21 and 28 at proportionate distance. There is no remaining evidence of the orig. corner.
Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.
- T17S R10E
 $\frac{1}{4}$ $\frac{S21}{S28}$
1969
- Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.
- 40.65 Stream, drains N. 45° E.
- 80.26 The cor. of secs. 20, 21, 28 and 29.
Land, nearly level desert.
Soil, sandy clay.
No timber.
Undergrowth, shadscale and salt grass.
-
- From the cor. of secs. 5, 6, 31 and 32 on the S. bdy. of the Tp.
N. 0° 55' W., bet. secs. 31 and 32.
Over nearly level desert land, through shadscale and salt grass.
- 21.40 Draw, drains N. 33° E.
- 32.42 Wash, 15 lks. wide, 8 ft. deep, drains N. 47° E.
- 40.37 Point for the $\frac{1}{4}$ sec. cor. of secs. 31 and 32 at proportionate distance, falls in a wash, 85 lks. wide, 10 ft. deep, drains N. 45° E., where a cor. cannot be perpetuated. There is no remaining evidence of the orig. cor.
- 41.37 Point selected for the witness $\frac{1}{4}$ sec. cor. of secs. 31 and 32.
Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

Dependent Resurvey, T. 17 S., R. 10 E.

CHAINS

T17S R10E

$$\frac{1}{2}$$

S31	S32
-----	-----

WTC

1969

No accessories available.

- 48.60 Wash, 40 lks. wide, 10 ft. deep, drains E.
- 59.00 Wash, 30 lks. wide, 4 ft. deep, drains S. 87° E.
- 65.60 Wash, 30 lks. wide, 10 ft. deep, drains N. 45° E.
- 80.74 Point for the cor. of secs. 29, 30, 31 and 32 at proportionate distance. There is no remaining evidence of the orig. corner.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T17S R10E

S30	S29
S31	S32

1969

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.

Land, nearly level desert.
Soil, sandy clay.
No timber.
Undergrowth, shadscale and salt grass.

From the cor. of secs. 28, 29, 32 and 33.

N. 88° 56' W., bet. secs. 29 and 32.

Over nearly level desert land, through shadscale and salt grass.

- 33.00 Wash, drains NW.
- 36.80 Fence, bears N. 55° W. and S. 55° E.
- 38.10 Trail road, bears N. 55° W. and S. 55° E.
- 39.89 Point for the ¼ sec. cor. of secs. 29 and 32 at proportionate distance. There is no remaining evidence of the orig. corner.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T17S R10E

$$\frac{1}{4}$$

S29	S32
-----	-----

1969

No accessories available.

Dependent Resurvey, T. 17 S., R. 10 E.

CHAINS

- 42.50 Wash, 30 lks. wide, 15 ft. deep, drains N. 10° E.
- 52.55 Wash, 15 lks. wide, 4 ft. deep, drains S. 70° E.
- 64.40 Wash, 50 lks. wide, 6 ft. deep, drains N. 45° E.
- 79.78 The cor. of secs. 29, 30, 31 and 32.
- Land, nearly level desert.
Soil, sandy clay.
No timber.
Undergrowth, shadscale and salt grass.
-
- S. 89° 22' W., bet. secs. 30 and 31.
- Over nearly level desert land, through shadscale and salt grass.
- 14.00 Wash, 40 lks. wide, 6 ft. deep, drains irregularly N.
- 31.55 Wash, 20 lks. wide, 5 ft. deep, drains irregularly N. 80° E.
- 38.85 Improved dirt road to dinosaur quarry, bears N. 5° 30' W. and S. 5° 30' E.
- 40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 30 and 31 at proportionate distance. There is no remaining evidence of the orig. corner.
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.
- T17S R10E
 $\frac{1}{4}$ — S30
S31
1969
- Raise a mound of stone, $2\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, N. of corner.
- 68.60 Trail road on top of ridge, bears irregularly N. and S.; desc. 45 ft. over gentle W. slope into corner.
- 79.87 Fence, bears N. 20° W. and S. 20° E.
- 80.00 The cor. of secs. 25, 30, 31 and 36, an iron post, $2\frac{1}{2}$ ins. diam., set, mkd. and witnessed as described in the field notes of T. 17 S., R. 9 E., surveyed concurrently under this same group.
- Land, nearly level desert.
Soil, sandy clay.
No timber.
Undergrowth, shadscale and salt grass.
-
- From the cor. of secs. 29, 30, 31 and 32.
- N. 0° 06' W., bet. secs. 29 and 30.

Dependent Resurvey, T. 17 S., R. 10 E.

CHAINS

Over nearly level desert land, through shadscale and salt grass.

6.00 Wash, 40 lks. wide, 8 ft. deep, drains E.

29.30 Wash, 20 lks. wide, 5 ft. deep, drains N. 44° E.

40.36 Point for the $\frac{1}{2}$ sec. cor. of secs. 29 and 30 at proportionate distance. There is no remaining evidence of the orig. corner.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T17S R10E

$\frac{1}{2}$

S30|S29

1969

No accessories available.

47.10 Wash, 15 lks. wide, 4 ft. deep, drains N. 41° E.

60.54 Point for the N. 1/16 sec. cor. of secs. 29 and 30.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T17S R10E

N

1/16

S30|S29

1969

No accessories available.

67.75 Improved dirt road, bears N. 53° W. and S. 53° E.

68.00 Fence, bears N. 53° W. and S. 53° E.

69.30 Ditch, drains S. 53° E.

73.65 Telephone line, bears N. 55° W. and S. 55° E.

80.72 The cor. of secs. 19, 20, 29 and 30 determined by the cor. of an old fence; fences bearing E., N. and S. This position is harmoniously related to existing orig. corners, has long been recognized as the cor. by adj. land owners, and is accepted as the best existing evidence of the position of the orig. corner.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T17S R10E

S19|S20

S30|S29

1969

Land, nearly level desert.

Soil, sandy clay.

No timber.

Undergrowth, shadscale and salt grass.

Dependent Resurvey, T. 17 S., R. 10 E.

CHAINS

From the cor. of secs. 20, 21, 28 and 29.

S. 89° 36' W., bet. secs. 20 and 29.

Over nearly level desert land, through shadscale and salt grass.

.25 Fence cor., bears N. 25 lks. dist.; fence bears N. and irregularly W.

40.21 Point for the $\frac{1}{4}$ sec. cor. of secs. 20 and 29 at proportionate distance. There is no remaining evidence of the orig. corner. There are fences bearing N., E. and W.; they are irregular and there is no distinct fence cor.; therefore, they could not be used to determine the position of the orig. corner.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T17S R10E

$\frac{1}{4}$ $\frac{S20}{S29}$

1969

No accessories available.

40.45 Fence, bears N.; continue along E. and W. fence line.

80.42 The cor. of secs. 19, 20, 29 and 30.

Land, nearly level desert.

Soil, sandy clay.

No timber.

Undergrowth, shadscale and salt grass.

S. 88° 44' W., bet. secs. 19 and 30.

Over nearly level desert land, through shadscale and salt grass.

.30 Improved dirt road, bears N. and S., 5.00 chs.; thence N. 53° W.

.90 Telephone line, bears N. and S. Fence, bears N. and S. under telephone line.

4.90 Irrigation ditch, drains N. 21° W.

13.40 Irrigation ditch, drains irregularly S. 50° E.

16.40 Junction of improved dirt roads, bears N. 70° W., S. 53° E. and S. 70° E.

19.98 Point for the E. $\frac{1}{16}$ sec. cor. of secs. 19 and 30.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

Dependent Resurvey, T. 17 S., R. 10 E.

CHAINS

T17S R10E
 E1/16— $\frac{S19}{S30}$
 1969

No accessories available.

39.96 Point for the $\frac{1}{4}$ sec. cor. of secs. 1, 9 and 30 at proportionate distance. There is no remaining evidence of the orig. corner.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T17S R19E
 $\frac{1}{4}$ — $\frac{S19}{S30}$
 1969

No accessories available.

45.20 Improved dirt road to dinosaur quarry bears N. $4^{\circ} 40'$ W. and S. $4^{\circ} 40'$ E.

59.94 Point for the W. 1/16 sec. cor. of secs. 19 and 30 at proportionate distance.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T17S R10E
 W1/16— $\frac{S19}{S30}$
 1969

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.

60.10 Fence, bears N. and S. for 41 lks.; thence W.

80.00 The cor. of secs. 19, 24, 25 and 30 on the W. bdy. of the Tp., an iron post, $2\frac{1}{2}$ ins. diam., set, mkd. and witnessed as described in the field notes of T. 17 S., R. 9 E., surveyed concurrently under this same group.

Land, nearly level desert.

Soil, sandy clay.

No timber.

Undergrowth, shadscale and salt grass.

General Description

A considerable variety of land and soil is found in the portion of Township 17 South, Range 10 East, covered by this survey. The general elevation is about 6,000 feet above sea level. Most of the township is gently rolling desert land except for the southeast portion which is rolling and broken canyon lands. The soil ranges from a sandy clay to a rocky and stony clay in the southeast portion of the township. There is a scattered to dense growth of scrub juniper in the southeast portion of the

Dependent Resurvey, T. 17 S., R. 10 E.

CHAINS

township. The general drainage is in a northerly direction. The township is accessible by an improved dirt road from Cleveland to the Cleveland Lloyd Dinosaur Quarry, and by numerous trail roads. There was no water or permanent habitations noted.

Blank

Page

CERTIFICATE OF SURVEY

I, Craig P. Sylvester, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 4th day of April, 19 69,

I have dependently resurveyed the East and South Boundaries and a portion of the subdivisional lines of Township 17 South, Range 10 East

of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

January 20, 1970 (Date)

[Signature] (Cadastral Surveyor) Supervisory

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

RECEIVED FOR APPROVAL Date MAR 16 1971

BUREAU OF LAND MANAGEMENT, Washington, D. C.

The foregoing field notes of the dependent resurvey of the East and South Boundaries and a portion of the subdivisional lines of Township 17 South, Range 10 East Salt Lake Meridian, Utah

executed by Craig P. Sylvester, Supervisory Cadastral Surveyor having been critically examined and found correct, are hereby approved.

JUN 2 1971 (Date)

[Signature] (Chief, Division of Engineering) Chief, Division of Cadastral Survey

CERTIFICATE OF TRANSCRIPT

I CERTIFY That the foregoing transcript of the field notes of the above described surveys in, is a true copy of the original field notes.

(Date)

(Chief, Division of Engineering)

Blank

Page

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
ORIGINAL

FIELD NOTES

OF THE

DEPENDENT RESURVEY OF THE

WEST 4 MILES OF THE SOUTH BOUNDARY

AND

A PORTION OF THE SUBDIVISION

OF

TOWNSHIP 17 SOUTH, RANGE 11 EAST

RECEIVED
STATE & LAND OFFICE
UTAH
JUN 21 PM 2:50
DEPT. OF INTERIOR
BUREAU OF LAND MGMT.

Of the SALT LAKE Meridian,

In the State of UTAH

EXECUTED BY

Craig P. Sylvester Supervisory Cadastral Surveyor

Under special instructions dated April 4, 19 69, which provided for the surveys
included under Group Number 506, approved April 22, 1969,
and assignment instructions dated June 2, 19 69.

Survey commenced August 7, 19 69

Survey completed December 9, 19 69

INDEX DIAGRAM

Township 17 SOUTH, Range 11 EAST,

6 46	47 5 45	33 4 33	25 8 24	15 2	1
7 43	44 8 43	32 9 31	23 10 23	13 11	12
18 41	42 17 40	30 16 30	21 15 21	12 14	13
19 38	39 20 38	29 21 28	20 22 19	10 23	24
30 36	37 29 35	27 28 26	17 27 17	8 26	25
31 2	34 32 3	25 33 4	16 34 5	7 35	36

Township 17 South, Range 11 East

CHAINS

The history of surveys of T. 17 S., R. 11 E., is as follows:

<u>Part Surveyed</u>	<u>Original Survey By - Date</u>	<u>Resurvey By - Date</u>
<u>North Boundary</u>		
West 4 Miles	A. D. Ferron 1884	John T. Breckon 1892
East 2 Miles	John T. Breckon 1895	John W. Dougall 1913
<u>West Boundary</u>		
All	A. D. Ferron 1883	John T. Breckon 1891
<u>South Boundary</u>		
West 4 Miles	A. D. Ferron 1884	John T. Breckon 1892
East 2 Miles	John W. Dougall 1913	John W. Dougall 1913
<u>East Boundary</u>		
All	John W. Dougall 1913	
<u>Subdivisions</u>		
West 4 Ranges of Sections	John T. Breckon 1892	
East 2 Ranges of Sections	John W. Dougall 1913	
2nd Meridional Line		John W. Dougall 1913

Before restoring the corners, the lines of the original survey were retraced and diligent search made for any evidence of the original corners, bearing trees or other calls of the original field note record.

The rules of proportionate measurement were applied to ascertain the position of the lost corners, but not until exhausting every reasonable possibility of finding direct evidence for the control of each particular corner.

The direction of the lines of this survey were determined by reference to true meridians established on line by altitude observations on the sun. The lines were carried forward by sustained angulation being supplemented by other numerous altitude observations on the sun taken throughout the progress of the survey. The distances were determined by chaining.

The timber in this township is all scrub and old juniper and pinon which is not suitable for bearing trees.

The geographic position of the southeast corner of sec. 34 is at Latitude $39^{\circ} 17' 40.8''$ N. and Longitude $110^{\circ} 39' 51.7''$ W., as computed by traverse and section line ties from the cor. of Tps. 16 and 17 S., Rs. 10 and 11 E., determined by the U. S. Geological Survey to be at Latitude $39^{\circ} 22' 56.282''$ N. and Longitude $110^{\circ} 44' 19.607''$ W.

Township 17 South, Range 11 East

CHAINS

The magnetic declination was read at a number of stations throughout the survey and the average of the readings was found to be 15° 30' E.

Dependent Resurvey of the South Boundary,
Township 17 South, Range 11 East

Reestablishment of the Resurvey Executed by J.
W. Dougall in 1913.

Beginning at the cor. of Tps. 17 and 18 S., Rs. 10 and 11 E., monumented with an iron post, 2½ ins. diam., 6 ins. above ground, with brass cap properly marked as described in the field notes of T. 17 S., R. 10 E., surveyed concurrently under this same group.

N. 84° 23' E., along the S. bdy. of sec. 31.

Over rolling desert land, through shadscale and salt grass; asc. 10 ft. over gentle W. slope.

- 5.35 Small spur, projects N.; desc. 85 ft. over E. slope.
- 6.55 Draw, drains irregularly N. 10° W.
- 11.00 Wash, 20 lks. wide, 1 ft. deep, drains irregularly N. 50° E.
- 16.35 Trail road, bears irregularly N. 40° E. and S. 40° W.
- 17.00 Enter rolling and broken canyon land.
- 26.00 Wash, 50 lks. wide, 2 ft. deep, drains irregularly N. 30° E.
- 36.98 The ¼ sec. cor. of sec. 31, which is monumented with a sandstone, 24x16x10 ins., firmly set and plainly mkd. ¼ on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 16 ins. in the ground to solid rock and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T17S R11E

¼ S31

T18S R11E

1969

Bury orig. stone cor. alongside iron post.

N. 89° 48' E., beginning new measurement.

Dependent Resurvey, South Bdy., T. 17 S., R. 11 E.

CHAINS

- Desc. 55 ft. over E. slope.
- 1.00 Wash, 80 lks. wide, 1 ft. deep, drains N. 45° W. Enter scattered timber.
- 17.00 Wash, 30 lks. wide, 1 ft. deep, drains irregularly N.
- 36.25 Wash, 70 lks. wide, 1 ft. deep, drains irregularly N. 25° W.
- 39.65 Wash, 30 lks. wide, 2 ft. deep, drains irregularly N. 10° W.
- 40.21 The cor. of secs. 31 and 32, which is monumented with a sandstone, 27x13x8 ins., firmly set and plainly mkd. 5 notches on E. and 1 notch on W. edges.
- At the cor. point
- Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
- T17S R11E
S31|S32
T18S R11E
1969
- Bury orig. stone cor. alongside iron post.
- Raise a mound of stone, 2½ ft. base, 1½ ft. high, N. of cor.
- Land, rolling and broken.
Soil, rocky clay.
Timber, scattered juniper E. half.
Undergrowth, shadscale and salt grass
-
- S. 89° 40' E., along the S. bdy. of sec. 32.
- Over rolling and broken canyon land, through shadscale, salt grass and scattered timber; asc. 90 ft. over W. slope.
- 1.68 The closing cor. of secs. 5 and 6, T. 18 S., R. 11 E., which is monumented with an iron post, 2 ins. diam., 12 ins. above ground, with brass cap mkd.
- T17S
R11E
S31|S32
CC
S6|S5
1913
- 5.86 Spur, projects NW.
- 30.45 Spur, projects N.; desc. 50 ft. over E. slope.
- 35.00 Trail road, bears N. and S.

26²

Dependent Resurvey, South Bdy., T. 17 S., R. 11 E.

CHAINS

- 39.95 Wash, 20 lks. wide, 1 ft. deep, drains irregularly N. 30° E.
- 40.53 Point for the $\frac{1}{2}$ sec. cor. of sec. 32 at proportionate distance and bearing. There is no remaining evidence of the orig. cor.
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 12 ins. in the ground to solid rock and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T17S R11E
 $\frac{1}{2}$ S32
 T18S R11E
 1969

S. 89° 03' E., beginning new measurement.

Asc. 30 ft. over W. slope.

- 4.90 Spur, projects N.; desc. 40 ft. over E. slope.
- 15.00 Wash, 50 lks. wide, 1 ft. deep, drains irregularly N. 15° W.; asc. 25 ft. over W. slope.
- 35.40 Trail road, bears irregularly N. 30° E. and S. 30° W.
- 40.07 The cor. of secs. 32 and 33, which is monumented with a sandstone, 22x10x9 ins., firmly set and plainly mkd. 4 notches on E. and 2 notches on W. edges.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 22 ins. in the ground, with brass cap mkd.

T17S R11E
 S32|S33
 T18S R11E
 1969

Bury orig. stone cor. alongside iron post.

Land, rolling and broken.
 Soil, rocky clay.
 Timber, scattered juniper.
 Undergrowth, shadscale and salt grass.

- S. 87° 29' E., along the S. bdy. of sec. 33.
- Over rolling and broken canyon land, through dense timber; asc. 115 ft. over W. slope.
- 1.75 The closing cor. of secs. 4 and 5, T. 18 S., R. 11 E., which is monumented with an iron post, 2 ins. diam., 12 ins. above ground, with brass cap mkd.

T17S R11E
 S32|S33
 CC
 S5|S4
 1913

Dependent Resurvey, South Bdy., T. 17 S., R. 11 E.

CHAINS

39.00

Ridge, bears N. and S.

40.15

The $\frac{1}{2}$ sec. cor. of sec. 33, which is monumented with a sandstone, 24x8x6 ins., loosely set and plainly mkd. $\frac{1}{2}$ on N. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T17S R11E

$\frac{1}{2}$ S33

T18S R11E

1969

Bury orig. stone cor. alongside iron post.

Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

N. $88^{\circ} 42'$ E., beginning new measurement.

Asc. 70 ft. over W. slope.

25.65

Ridge, bears N. and S.; desc. 85 ft. over E. slope.

35.00

Draw, drains irregularly N. 70° E.

40.07

The cor. of secs. 33 and 34, which is monumented with a badly deteriorated sandstone, 10x8x3 ins., firmly set in a mound of stone, markings nearly obliterated (record calls for a sandstone, 16x14x5 ins.).

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 12 ins. in the ground to solid rock and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T17S R11E

S33|S34

T18S R11E

1969

Bury orig. stone cor. alongside iron post.

Cor. is located 50 lks. S. of bottom of a draw on N. slope.

Land, rolling and broken.

Soil, rocky clay.

Timber, dense juniper and pinon.

S. $89^{\circ} 57'$ E., along the S. bdy. of sec. 34.

Over rolling and broken canyon land, through dense timber.

1.20

The closing cor. of secs. 3 and 4, T. 18 S., R. 11 E., which is monumented with an iron post, 2 ins. diam., 12 ins. above ground, with brass cap mkd.

Dependent Resurvey, South Bdy., T. 17 S., R. 11 E.

CHAINS

T17S	R11E
S33	S34
CC	
S4	S3
1913	

- 5.00 Bottom of deep canyon, drains N.; asc. 200 ft. over a W. slope.
- 26.50 Top of ridge, bears N. 15° E., and S. 15° W.; desc. 120 ft. over an E. slope.
- 33.50 Wash, 50 lks. wide, 3 ft. deep, drains irregularly N. 10° E.
- 49.10 The $\frac{1}{2}$ sec. cor. of sec. 34, which is monumented with an iron post, 1 inch diam., 12 ins. above ground, with brass cap mkd.

$\frac{1}{2}$
<u>S34</u>
S3
1913

From which,

A pinon, 12 ins. diam., bears S. 18° W., 34 lks. dist. (record 29 lks.), mkd. $\frac{1}{2}$ S3 BT.

A pinon, 10 ins. diam., bears N. 67° 45' E., 68 lks. dist. (same as record), mkd. $\frac{1}{2}$ S34 BT.

I destroyed the markings pertaining to sec. 3 on brass cap.

S. 89° 55' E., beginning new measurement.

Asc. 15 ft. W. slope.

- 4.60 Ridge, bears N. and S.; desc. 225 ft. over steep E. slope.
- 18.50 Wash, 110 lks. wide, 1 ft. deep, drains irregularly N. 20° E.
- 24.70 Wash, 20 lks. wide, 3 ft. deep, drains irregularly N. 20° W.
- 33.95 Trail road, bears irregularly N. and S.
- 39.95 The cor. of secs. 34 and 35, which is monumented with a sandstone, 16x12x8 ins., firmly set in a mound of stone, with markings nearly obliterated. There is no evidence of the 3 in. iron post as described in the official record of 1913.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T17S	R11E
<u>S34</u>	<u>S35</u>
T18S	R11E
1969	

Bury orig. stone cor. alongside iron post.

Raise a mound of stone, 2 $\frac{1}{2}$ ft. base, 1 $\frac{1}{2}$ ft. high, N. of corner.

Dependent Resurvey, South Bdy., T. 17 S., R. 11 E.

CHAINS

From this cor., the closing cor. of secs. 2 and 3, T. 18 S., R. 11 E., bears East, 1.25 chs. dist., an iron post, 3 ins. diam., 12 ins. above ground (same as record), with brass cap mkd.

T17S R11E	
S34	S35
CC	
S3	S2
1913	

Land, rolling and broken.
Soil, rocky clay.
Timber, dense juniper and pinon.

Dependent Resurvey of a Portion of the
Subdivision of T. 17 S., R. 11 E.

Reestablishment of the Resurvey Executed
by J. W. Dougall in 1913.

N. 0° 12' E., along the E. bdy. of sec. 34.

Over gently rolling land, through shadscale, salt grass and scattered timber; desc. 30 ft. over gentle N. slope.

5.30 Wash, 150 lks. wide, 2 ft. deep, drains irregularly N. 70° W.

18.50 Wash, 30 lks. wide, 1 ft. deep, drains irregularly N. 30° E.

19.325 Point for the S. 1/16 sec. cor. of sec. 34.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T17S R11E	
S1/16	
S34	
1969	

20.01 Point for the S. 1/16 sec. cor. of sec. 35.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T17S R11E	
S1/16	
	S35
1969	

38.65 The ¼ sec. cor. of sec. 34, which is monumented with an iron post, 1 in. diam., 18 ins. above ground, with brass cap-mkd.

¼	
S34	S35
1913	

266

Dependent Resurvey, T. 17 S., R. 11 E.

CHAINS

From which,

A dead juniper, 10 ins. diam., bears S. 81° W.,
95 lks. dist., mkd. $\frac{1}{2}$ S34 BT (record 2.48 chs.).

I destroyed all markings pertaining to sec. 35.

N. 0° 01' E., beginning new measurement.

Asc. 60 ft. over S. slope.

- 1.37 Point for the $\frac{1}{2}$ sec. cor. of sec. 35 at midpoint bet.
the cor. of secs. 34 and 35 and the closing cor. of
secs. 26 and 35.

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T17S R11E

$\frac{1}{2}$
S35

1969

Raise a mound of stone, 3 ft. base, 2 ft. high, E.
of cor.

- 1.80 Small knoll; bears E.
- 7.95 Ridge, bears E. and W.; desc. 55 ft. over gentle N.
slope.
- 19.81 Wash, 30 lks. wide, 3 ft. deep, drains irregularly N.
60° E.
- 21.34 Small spur, projects E.
- 38.72 The cor. of secs. 27 and 34, which is monumented with a
conglomerate, 16x8x4 ins., firmly set and plainly mkd.
1 notch on S. edge.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 12 ins.
in the ground to solid rock and in a mound of stone, 3
ft. base to top, with brass cap mkd.

T17S R11E

S27
S34

1969

Bury orig. stone cor. alongside iron post.

Land, gently rolling.
Soil, rocky clay.
Timber, scattered juniper and pinon.
Undergrowth, shadscale and salt grass.

N. 1° 31' W., along the E. bdy. of sec. 27.

Dependent Resurvey, T. 17 S., R. 11 E.

CHAINS	
	Over rolling and broken canyon land, through dense timber; desc. 35 ft. over N. slope.
2.67	The closing cor. of secs. 26 and 35, which is monumented with an iron post, 2 ins. diam., 12 ins. above ground, with brass cap mkd. <div style="text-align: center;"> T17S R11E CC S26 S27 S35 S34 1913 </div>
11.00	Graded dirt road, bears N. 65° E. and S. 65° W.; asc. 15 ft. over gentle S. slope.
20.45	Trail road, bears N. 85° E. and S. 85° W.
28.95	Desc. 80 ft. over steep N. slope; leave timber.
33.35	Wash, 30 lks. wide, 1 ft. deep, drains irregularly N. 55° W.
40.25	The $\frac{1}{4}$ sec. cor. of sec. 27, which is monumented with a limestone, 12x12x6 ins., firmly set and dimly mkd. $\frac{1}{4}$ on W. face. At the co.r point Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd. <div style="text-align: center;"> T17S R11E $\frac{1}{4}$ S27 1969 </div> Bury orig. stone cor. alongside iron post. Raise a mound of stone, 2 $\frac{1}{2}$ ft. base, 1 $\frac{1}{2}$ ft. high, W. of corner. <hr style="width: 20%; margin: 10px auto;"/> N. 0° 41' W., beginning new measurement. Asc. 75 ft. over gentle S. slope.
2.41	Point for the $\frac{1}{4}$ sec. cor. of sec. 26 at midpoint bet. the closing cor. of secs. 26 and 35, and the closing cor. of secs. 23 and 26. Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 6 ins. in the ground to solid rock and in a mound of stone, 4 ft. base to top, with brass cap mkd. <div style="text-align: center;"> T17S R11E $\frac{1}{4}$ S26 1969 </div>
16.75	Small spur, projects W.; desc. 85 ft. over N. slope.

Dependent Resurvey, T. 17 S., R. 11 E.

CHAINS

19.98 Point for the N. 1/16 sec. cor. of sec. 27.

Set an iron post, 30 ins. long, 2½ ins. diam., 4 ins. in the ground to solid rock and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T17S R11E

N
1/16
S27

1969

22.30 Fence, bears N. 75° E. and S. 75° W.

31.55 Wash, 30 lks. wide, 1 ft. deep, drains irregularly W.

39.96 The cor. of secs. 22 and 27, which is monumented with a sandstone, 13x10x2 ins., firmly set and plainly mkd. 2 notches on the E. and S. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T17S R11E

S22
S27

1969

Bury orig. stone cor. alongside iron post.

Raise a mound of stone, 2½ ft. base, 1½ ft. high, N. of corner.

Land, rolling and broken.

Soil, rocky clay.

Timber, dense juniper and pinon.

N. 0° 04' E., along the E. bdy. of sec. 22.

Over rolling and broken canyon land, through shadscale and salt grass; desc. 70 ft. over gentle N. slope.

2.43 The closing cor. of secs. 23 and 26, which is monumented with an iron post, 2 ins. diam., 12 ins. above ground, with brass cap mkd.

T17S R11E

S22	S23
CC	S26
S27	

1913

This cor. is located at a fence corner. Fences bearing W. and S. 10° E.

Dependent Resurvey, T. 17 S., R. 11 E.

CHAINS	
10.00	Wash, 10 lks. wide, 1 ft. deep, drains irregularly N. 80° E.
15.10	Small knoll, bears E. and W.
40.28	The $\frac{1}{2}$ sec. cor. of sec. 22, which is monumented with a limestone, 10x10x3 ins., firmly set and plainly mkd. $\frac{1}{2}$ on W. face.
	At the cor. point
	Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground and in a collar of stone, with brass cap mkd.
	T17S R11E $\frac{1}{2}$ S22 1969
	Bury orig. stone cor. alongside iron post.
	N. 0° 04' W., beginning new measurement.
	Desc. 10 ft. over gentle N. slope.
2.07	Point for the $\frac{1}{2}$ sec. cor. of sec. 23 at midpoint bet. the closing cor. of secs. 23 and 26, and the closing cor. of secs. 14 and 23.
	Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T17S R11E $\frac{1}{2}$ S23 1969
3.00	Fence, bears E. and W.
9.15	Wash, 80 lks. wide, 2 ft. deep, drains irregularly N. 55° E.; asc. 75 ft. over S. slope.
15.50	Wash, 10 lks. wide, 2 ft. deep, drains irregularly E.
20.00	Wash, 20 lks. wide, 2 ft. deep, drains irregularly N. 80° E.
20.37	Graded dirt road, bears E. and W.
29.00	Wash, 30 lks. wide, 1 ft. deep, drains irregularly S. 55° E.
40.26	The cor. of secs. 15 and 22, which is monumented with a sandstone, 16x14x12 ins., firmly set and plainly mkd. 3 notches on S. and 2 notches on E. edges.
	At the cor. point
	Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 20 ins. in the ground, with brass cap mkd.

Dependent Resurvey, T. 17 S., R. 11 E.

CHAINS

T17S R11E

S15
S22

1969

Bury orig. stone cor. alongside iron post.

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Land, rolling and broken.

Soil, rocky clay.

No timber.

Undergrowth, shadscale and salt grass.

N. 0° 59' W., along the E. bdy. of sec. 15.

Over rolling canyon land, through shadscale and salt grass; asc. 90 ft. over S. slope.

- 1.73 The closing cor. of secs. 14 and 23, which is monumented with an iron post, 2 ins. diam., 12 ins. above ground, with brass cap mkd.

T17S R11E

CC	S14
S15	S23
S22	

1913

- 16.73 Wash, 10 lks. wide, 1 ft. deep, drains irregularly S. 30° W.

- 28.11 Ridge, bears E. and W.; desc. 100 ft. over N. slope.

- 39.89 Point for the $\frac{1}{2}$ sec. cor. of sec. 15 at proportionate bearing and distance. There is no remaining evidence of the orig. cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T17S R11E

$\frac{1}{2}$
S15

1969

Raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor.

N. 1° 13' W. beginning new measurement.

- 1.76 Point for the $\frac{1}{2}$ sec. cor. of sec. 14 at midpoint bet. the closing cor. of secs. 14 and 23, and the closing cor. of secs. 11 and 14.

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground, with brass cap mkd.

T17S R11E

$\frac{1}{2}$
S14

1969

Dependent Resurvey, T. 17 S., R. 11 E.

CHAINS	
7.00	Wash, 30 lks. wide, 1 ft. deep, drains irregularly N. 65° W.
25.10	Asc. 55 ft. over S. slope.
35.60	Desc. 55 ft. over N. slope.
40.25	The cor. of secs. 10 and 15, which is monumented with an iron post, 2 ins. diam., 12 ins. above ground, with brass cap mkd.
	T17S R11E <u>S10</u> <u>S15</u> 1913
	Land, rolling. Soil, rocky clay. No timber. Undergrowth, shadscale and salt grass.
	N. 1° 41' E., along the E. bdy. of sec. 10.
	Over steep canyon land, through scattered timber, shadscale and salt grass.
.70	Bottom of steep gulch.
1.44	The closing cor. of secs. 11 and 14, which is monumented with an iron post, 2 ins. diam., 12 ins. above ground, with brass cap mkd.
	T17S R11E <u>S10</u> <u>S11</u> <u>CC</u> <u>S14</u> <u>S15</u> 1913
	Asc. 145 ft. over steep S. slope.
8.00	Top of spur, slopes W.; desc. 135 ft. over steep N. slope.
18.00	Draw, drains W.; asc. 95 ft. over steep S. slope.
26.65	Top of spur, projects N. 60° W.; desc. 165 ft. over steep N. slope.
35.15	Wash, 250 lks. wide, 2 ft. deep, drains irregularly N. 60° W.
37.00	Asc. 90 ft. over steep S. slope.
41.53	Point for the ½ sec. cor. of sec. 11 at midpoint bet. the closing cor. of secs. 11 and 14, and the closing cor. of secs. 2 and 11.
	Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground to solid rock and in a mound of stone, 4 ft. base to top, with brass cap mkd.

Dependent Resurvey, T. 17 S., R. 11 E.

CHAINS

T17S R11E

½
S11

1969

43.43 The ½ sec. cor. of sec. 10, which is monumented with an iron post, 1 in. diam., 18 ins. above ground, with brass cap mkd.

½
S10

1913

From which,

A juniper, 5 ins. diam., bears S. 85° E., 44 lks. dist., mkd. ½ S11 BT (same as record).

A juniper, 7 ins. diam., bears S. 80° W., 110 lks. dist., mkd. ½ S10 BT (same as record).

I destroyed all markings pertaining to sec. 11 on brass cap.

Corner is located on steep rocky S. slope.

N. 1° 43' E., beginning new measurement.

Asc. 35 ft. over steep S. slope.

10.50 Top of spur, projects W.; desc. 65 ft. over steep N. slope.

25.00 Wash, 20 lks. wide, 1 ft. deep, drains irregularly N. 45° E.; asc. 35 ft. over S. slope.

38.19 The closing cor. of secs. 2 and 11, which is monumented with an iron post, 2 ins. diam., 12 ins. above ground, with brass cap mkd.

T17S R11E

S3
CC
S10

S2
S11

1913

Desc. 20 ft. over N. slope.

43.69 The cor. of secs. 3 and 10, which is monumented with a sandstone, 12x10x6 ins., firmly set and plainly mkd. 5 notches on S. and 2 notches on E. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground to solid rock and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T17S R11E

S3
S10

1969

Dependent Resurvey, T. 17 S., R. 11 E.

CHAINS

Bury orig. stone cor. alongside iron post.

Land, steep canyons.
Soil, rocky clay.
Timber, scattered juniper and pinon.
Undergrowth, shadscale and salt grass.

N. 0° 23' W., along the E. bdy. of sec. 3.

Over rolling and broken canyon land, through scattered timber, shadscale and salt grass; asc. 25 ft. over S. slope.

4.00 Top of ascent; desc. 40 ft. over N. slope.

10.10 Wash, 20 lks. wide, 3 ft. deep, drains irregularly N. 50° E.; asc. 60 ft. over S. slope.

14.60 Wash, 90 lks. wide, 12 ft. deep, drains irregularly S. 50° E.

22.10 Wash, 10 lks. wide, 1 ft. deep, drains irregularly S. 30° E.

30.00 Top of ascent; desc. 20 ft. over N. slope.

34.56 Point for the $\frac{1}{4}$ sec. cor. of sec. 2 at proportionate distance bet. the closing cor. of secs. 2 and 11 and the cor. of secs. 2, 3, 34 and 35.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 8 ins. in the ground to solid rock and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T17S R11E

$\frac{1}{4}$
S2

1969

39.56 The $\frac{1}{4}$ sec. cor. of sec. 3, which is monumented with a sandstone, 12x6x6 ins., loosely set and plainly mkd. $\frac{1}{4}$ on W. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 12 ins. in the ground to solid rock and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T17S R11E

$\frac{1}{4}$
S3

1969

Bury orig. stone cor. alongside iron post.

N. 0° 05' E., beginning new measurement.

Asc. 80 ft. over steep S. slope.

Dependent Resurvey, T. 17 S., R. 11 E.

CHAINS

- 15.50 Top of ascent; desc. 45 ft. over N. slope.
- 19.45 Trail road, bears N. 60° E. and S. 60° W.
- 35.70 Wash, 20 lks. wide, 3 ft. deep, drains irregularly N. 80° W.
- 39.77 The cor. of secs. 2, 3, 34 and 35 on the N. bdy. of the Tp., which is monumented with an iron post, 2½ ins. diam., 6 ins. above ground, with brass cap mkd.

T16S R11E

S34|S35

S3|S2

T17S R11E

1969

Land, rolling and broken.
Soil, rocky clay.
Timber, scattered juniper and pinon.
Undergrowth, shadscale and salt grass.

Reestablishment of the Survey Executed
by J. T. Breckon in 1892.

From the cor. of secs. 33 and 34 on the S. bdy. of the Tp.

N. 0° 13' W., bet. secs. 33 and 34.

Over rolling canyon land, through dense timber; desc. 40 ft. over N. slope.

- 0.50 Draw, drains N. 80° E.; asc. 40 ft. over a SE. slope.
- 10.83 Top of ascent; desc. 180 ft. over N. slope.
- 35.40 Trail road, bears N. 15° W. and S. 15° E.
- 39.90 The ¼ sec. cor. of secs. 33 and 34, which is monumented with a sandstone, 18x12x4 ins., loosely set and plainly mkd. ¼ on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to solid rock and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T17S R11E

¼
S33|S34

1969

Bury orig. stone cor. alongside iron post.

N. 0° 54' W., beginning new measurement.

Desc. 35 ft. over N. slope.

Dependent Resurvey, T. 17 S., R. 11 E.

CHAINS

- 12.20 Wash, 20 lks. wide, 1 ft. deep, drains irregularly N. 55° W.
- 16.90 Ascend 70 ft. over steep S. slope.
- 20.00 Top of spur, projects W.; desc. 100 ft. over gentle N. slope.
- 40.24 The cor. of secs. 27, 28, 33 and 34, which is monumented with a sandstone, 16x12x4 ins., loosely set and plainly mkd. 3 notches on E. and 1 notch on S. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 5 ins. in the ground to solid rock and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T17S R11E

S28	S27
S33	S34

1969

Set orig. stone cor. alongside iron post.

Land, rolling.

Soil, rocky clay.

Timber, dense juniper and pinon.

From the cor. of secs. 27 and 34.

N. 88° 05' W., bet. secs. 27 and 34.

Over rolling land, through scattered timber.

13.00 Trail road, bears N. 20° W. and S. 20° E.

27.00 Wash, drains N. 10° E.

40.52 Point for the ¼ sec. cor. of secs. 27 and 34 at proportionate distance. There is no remaining evidence of the orig. cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T17S R11E

¼	S27
	S34

1969

Raise a mound of stone, 2 ft. base, 2 ft. high, N. of cor.

47.00 Wash, drains N. 20° W.

81.04 The cor. of secs. 27, 28, 33 and 34.

Land, rolling.

Soil, rocky clay.

Timber, scattered juniper.

N. 0° 41' W., bet. secs. 27 and 28.

Dependent Resurvey, T. 17 S., R. 11 E.

CHAINS

- Over rolling canyon land, through scattered timber, shadscale and salt grass; desc. 75 ft. over gentle N. slope.
- 13.50 Graded dirt road, bears N. 70° W. and S. 70° E.
- 17.82 Small ridge of large boulders, bears NE. and SW.
- 19.32 Point for the S. 1/16 sec. cor. of secs. 27 and 28.
- Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
- T17S R11E
S
1/16
S28|S27
1969
- 32.90 Wash, 40 lks. wide, 2 ft. deep, drains irregularly N. 70° E.
- 36.00 Trail road, bears N. 45° E. and S. 45° W.
- 38.64 Point for the ½ sec. cor. of secs. 27 and 28 at proportionate distance. There is no remaining evidence of the orig. cor.
- Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone, with brass cap mkd.
- T17S R11E
½
S28|S27
1969
- Ascend 130 ft. over S. slope.
- 40.50 Trail road, bears N. 65° E. and S. 65° W.
- 45.20 Wash, 50 lks. wide, 1 ft. deep, drains irregularly N. 60° E.
- 49.10 Base of steep ascent.
- 55.30 Top of ridge, bears NW. and SE.; desc. 100 ft. over gentle N. slope.
- 57.96 Point for the N. 1/16 sec. cor. of secs. 27 and 28.
- Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
- T17S R11E
N
1/16
S28|S27
1969
- 75.00 Ridge, bears irregularly E. and W.

Dependent Resurvey, T. 17 S., R. 11 E.

277

CHAINS

77.28

The cor. of secs. 21, 22, 27 and 28, which is monumented with a sandstone, 14x8x3 ins., firmly set and plainly mkd. 3 notches on E. and 2 notches on S. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T17S R11E

S21|S22

S28|S27

1969

Bury orig. stone cor. alongside iron post.

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.

Corner is located in bottom of small draw, drains N. 45° E.

Land, rolling.

Soil, rocky clay.

Timber, scattered juniper and pinon.

Undergrowth, shadscale and salt grass.

From the cor. of secs. 22 and 27.

S. 89° 55' W., bet. secs. 22 and 27.

Over rolling land, through scattered timber and sagebrush asc. 10 ft. over gentle E. slope.

3.55 Wash, 70 lks. wide, 12 ft. deep, drains irregularly N. 20° W.

11.80 Top of slope; desc. 55 ft. over W. slope.

15.00 Wash, drains N. 60° W.

25.50 Wash, drains N. 50° E.

32.00 Recross same wash, drains S. 35° E.

40.23 The ½ sec. cor. of secs. 22 and 27, which is monumented with a limestone, 16x8x4 ins., firmly set and plainly mkd. ½ on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone, with brass cap mkd.

T17S R11E

½ — S22

S27

1969

Corner is located in an old fence, bearing E. and W.

Dependent Resurvey, T. 17 S., R. 11 E.

CHAINS

- S. 89° 48' W., beginning new measurement.
- Ascend 80 ft. over E. slope.
- 2.70 Wash, 150 lks. wide, 4 ft. deep, drains irregularly N.
- 40.12 The cor. of secs. 21, 22, 27 and 28.
- Land, rolling.
Soil, rocky clay.
Timber, scattered juniper.
Undergrowth, sagebrush.
-
- N. 4° 24' E., bet. secs. 21 and 22.
- Over rolling canyon land, through shadscale and salt grass.
- 1.50 Small spur, projects N. 45° E.
- 4.14 Fence, bears N. 25° E. and S. 25° W.
- 7.64 Wash, 20 lks. wide, 1 ft. deep, drains irregularly S. 70° E.; asc. 45 ft. over steep S. slope.
- 15.00 Top of ascent; fence, bears N. 50° W. and S. 50° E.; desc. 80 ft. over N. slope.
- 33.60 Trail road, bears N. 25° E. and S. 25° W.
- 41.73 The $\frac{1}{2}$ sec. cor. of secs. 21 and 22, which is monumented with a sandstone, 12x6x4 ins., firmly set and plainly mkd. $\frac{1}{4}$ on W. face.
- At the cor. point
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins. in the ground to solid rock and in a mound of stone, 3 ft. base to top, with brass cap mkd.
- T17S R11E
 $\frac{1}{4}$
S21|S22
1969
- Bury orig. stone cor. alongside iron post.
-
- N. 0° 25' W., beginning new measurement.
- Descend 20 ft. over gentle N. slope.
- 4.00 Wash, 150 lks. wide, 3 ft. deep, drains irregularly N. 60° E.
- 15.50 Wash, 70 lks. wide, 1 ft. deep, drains irregularly S. 85° E.
- 21.85 Wash, 20 lks. wide, 1 ft. deep, drains irregularly N. 40° E.
- 28.03 Wash, 10 lks. wide, 3 ft. deep, drains irregularly E.

Dependent Resurvey, T. 17 S., R. 11 E.

CHAINS

37.00 Trail road, bears N. 40° W. and S. 40° E.

40.60 The cor. of secs. 15, 16, 21 and 22, which is monumented with a sandstone, 18x14x10 ins., firmly set and dimly mkd. 3 notches on E. and 3 notches on S. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground and in a collar of stone, with brass cap mkd.

T17S R11E

S16|S15

S21|S22

1969

Bury orig. stone cor. alongside iron post.

Land, rolling.

Soil, rocky clay.

No timber.

Undergrowth, shadscale and salt grass.

From the cor. of secs. 15 and 22.

N. 88° 52' W., bet. secs. 15 and 22.

Over rolling and broken land, through shadscale and salt grass.

6.00 Wash, drains S.

11.90 Trail road, bears irregularly N. 20° W. and S. 20° E.

38.75 Point for the ½ sec. cor. of secs. 15 and 22 at proportionate distance. There is no remaining evidence of the orig. cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone, with brass cap mkd.

T17S R11E

½ S15

S22

1969

Corner is located in the bottom of a shallow wash, 30 lks. wide, drains irregularly S. 80° E.

49.30 Trail road, bears N. 60° W. and S. 60° E.

77.50 The cor. of secs. 15, 16, 21 and 22.

Land, rolling and broken.

Soil, rocky clay.

No timber,

Undergrowth, shadscale and salt grass.

N. 7° 00' W., bet. secs. 15 and 16.

Dependent Resurvey, T. 17 S., R. 11 E.

CHAINS

Over rolling and broken canyon land, through shadscale and salt grass; asc. 75 ft. over S. slope over large sandstone boulders.

- .65 Trail road, bears N. 85° W. and S. 85° E.
- 8.14 Top of low hill, bears NW. and SE., enter scattered timber; desc. 55 ft. over N. slope.
- 38.53 The $\frac{1}{2}$ sec. cor. of secs. 15 and 16, which is monumented with a sandstone, 16x8x3 ins., firmly set and dimly mkd. $\frac{1}{4}$ on W. face (record calls for a sandstone, 16x14x8 ins.)

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T17S R11E

$\frac{1}{2}$
S16|S15

1969

Bury orig. stone cor. alongside iron post.

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.

N. 0° 16' W., beginning new measurement.

Desc. 75 ft. over N. slope.

- 1.10 Wash, 20 lks. wide, 1 ft. deep, drains irregularly N. 60° E.
- 20.00 Wash, 40 lks. wide, 3 ft. deep, drains irregularly N. 55° E.
- 40.41 The cor. of secs. 9, 10, 15 and 16, which is monumented with a badly deteriorated sandstone, 15x8x6 ins., loosely set and plainly mkd. 3 notches on E. edge, other notches obliterated (record calls for a sandstone 18x14x8 ins.).

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins. in the ground to solid rock and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T17S R11E

$\frac{1}{2}$
S9|S10
S16|S15

1969

Bury orig. stone cor. alongside iron post.

Corner is located on a steep S. slope.

Land, rolling and broken.
Soil, rocky clay.
Timber, scattered juniper and pinon.
Undergrowth, shadscale and salt grass.

Dependent Resurvey, T. 17 S., R. 11 E.

CHAINS

From the cor. of secs. 10 and 15.

S. 89° 54' W., bet. secs. 10 and 15.

Over rolling and broken land, through scattered timber;
desc. 65 ft. over SW. slope.

20.30 Wash, 2.50 chs. wide, 10 ft. deep, drains irregularly
N. 45° E.; asc. 155 ft. over E. slope.

34.65 Top of ascent; desc. 115 ft. over W. slope.

40.41 Point for the $\frac{1}{4}$ sec. cor. of secs. 10 and 15 at pro-
portionate distance. There is no remaining evidence
of the orig. corner.

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins.
in the ground and in a collar of stone, with brass cap
mkd.

T17S R11E

$\frac{1}{4}$ $\frac{S10}{S15}$

1969

Ascend 50 ft. over E. slope.

44.05 Wash, 50 lks. wide, 2 ft. deep, drains irregularly N.
50° W.

50.85 Top of ascent; desc. 50 ft. over W. slope.

72.50 Wash, drains N.; asc. over a SE. slope.

80.82 The cor. of secs. 9, 10, 15 and 16.

Land, rolling and broken.
Soil, rocky clay.
Timber, scattered juniper.

N. 1° 42' E., bet. secs. 9 and 10.

Over rolling and broken canyon land, through scattered
timber, shadscale and salt grass; asc. 40 ft. over S.
slope.

3.00 Top of hill, bears N. 45° E. and S. 45° W.; desc. 30 ft.
over N. slope.

8.60 Wash, 40 lks. wide, 2 ft. deep, drains irregularly S.
75 E.

36.20 Wash, 20 lks. wide, 2 ft. deep, drains irregularly S.
50° E.; asc. 20 ft. over S. slope.

41.55 Point for the $\frac{1}{4}$ sec. cor. of secs. 9 and 10 at propor-
tionate distance. There is no remaining evidence of
the orig. cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins.
in the ground and in a collar of stone, with brass cap
mkd.

Dependent Resurvey, T. 17 S., R. 11 E.

CHAINS

T17S R11E

 $\frac{1}{2}$
S9|S10

1969

Ascend 80 ft. over steep S. slope.

46.55 Top of ascent; desc. 125 ft. over N. slope.

83.10 Point for the cor. of secs. 3, 4, 9 and 10 at proportionate distance. There is no remaining evidence of the orig. cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground and in a collar of stone, with brass cap mkd.

T17S R11E

 $\frac{1}{2}$
S4|S3
S9|S10

1969

Land, rolling and broken.
Soil, rocky clay.
Timber, scattered juniper and pinon.
Undergrowth, shadscale and salt grass.

From the cor. of secs. 3 and 10.

N. $89^{\circ} 36'$ W., bet. secs. 3 and 10.

Over rolling and broken land, through scattered timber; desc. 40 ft. over W. slope.

6.60 Wash, 2.50 chs. wide, 4 ft. deep, drains irregularly N. 10° W.; asc. 125 ft. over E. slope.40.20 The $\frac{1}{2}$ sec. cor. of secs. 3 and 10, which is monumented with a sandstone, 18x10x5 ins., firmly set and plainly mkd. $\frac{1}{2}$ on N. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground and in a collar of stone, with brass cap mkd.

T17S R11E

 $\frac{1}{2}$
S3
S10

1969

Bury orig. stone cor. alongside iron post.

S. $83^{\circ} 53'$ W., beginning new measurement.

Ascend 55 ft. over E. slope.

4.20 Desc. 40 ft. over W. slope.

14.50 Ascend 60 ft. over E. slope.

22.50 Descend 55 ft. over W. slope.

Dependent Resurvey, T. 17 S., R. 11 E.

CHAINS	
40.96	<p>The cor. of secs. 3, 4, 9 and 10.</p> <p>Land, rolling and broken. Soil, rocky clay. Timber, scattered juniper and pinon.</p>
8.35	<p>N. 0° 47' E., bet. secs. 3 and 4.</p> <p>Over rolling and broken land, through scattered timber, shadscale and salt grass; asc. 30 ft. over S. slope.</p> <p>Small ridge, bears irregularly E. and W.; desc. 100 ft. over N. slope.</p>
20.55	Ravine, drains irregularly N. 40° W.
31.00	Same ravine, drains N. 45° E.
41.53	<p>Point for the $\frac{1}{2}$ sec. cor. of secs. 3 and 4 at proportionate distance. There is no remaining evidence of the orig. cor.</p> <p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T17S R11E $\frac{1}{2}$ S4 S3 1969</p> <p>Raise a mound of stone, $2\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, W. of cor.</p>
47.25	Wash in bottom of canyon, drains N. 30° W.
65.75	Trail road, bears irregularly E. and W.
73.55	Trail road, bears irregularly E. and W.
82.98	<p>The cor. of secs. 3, 4, 33 and 34 on the N. bdy. of the Tp., which is monumented with an iron post, $2\frac{1}{2}$ ins. diam., set in a collar of stone, 10 ins. above ground, with brass cap mkd.</p> <p style="text-align: center;">T16S R11E <u>S33 S34</u> S4 S3 T17S R11E 1969</p> <p>Land, rolling and broken. Soil, rocky clay. Timber, scattered juniper and pinon. Undergrowth, shadscale and salt grass.</p>
	<p>From the cor. of secs. 32 and 33 on the S. bdy. of the Tp.</p> <p>N. 0° 06' E., bet. secs. 32 and 33.</p>

Dependent Resurvey, T. 17 S., R. 11 E.

CHAINS

Over gently rolling land, through scattered timber; desc. 50 ft. over gentle N. slope.

- 11.50 Trail road, bears N. 30° E. and S. 30° W.
- 35.30 Wash, 1.00 ch. wide, 5 ft. deep, drains irregularly N. 80° W.
- 37.21 Point for the $\frac{1}{2}$ sec. cor. of secs. 32 and 33 at proportionate distance. There is no remaining evidence of the orig. cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 22 ins. in the ground, with brass cap mkd.

T17S R11E

$\frac{1}{2}$

S32|S33

1969

Raise a mound of stone, $2\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

Descend 60 ft. over gentle N. slope.

- 38.15 Trail road, bears N. 60° W. and S. 60° E.
- 43.20 Same wash, 1.00 ch. wide, 5 ft. deep, drains irregularly E.
- 74.42 The cor. of secs. 28, 29, 32 and 33, which is monumented with a sandstone, 16x10x6 ins., firmly set in a mound of stone, and very dimly mkd. 1 notch on S. and 4 notches on E. edges.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., over a cross (X) chiseled in solid rock, and in a mound of stone, $4\frac{1}{2}$ ft. base to top, with brass cap mkd.

T17S R11E

S29|S28

S32|S33

1969

Set orig. stone cor. alongside iron post.

Land, gently rolling.
Soil, rocky clay.
Timber, scattered juniper and pinon.

From the cor. of secs. 27, 28, 33 and 34.

S. 88° 55' W., bet. secs. 28 and 33.

Over gently rolling land, through scattered timber.

- 4.00 Wash, drains N.
- 17.20 Fence, bears N. 16° 15' E. and S. 16° 15' W.
- 39.70 The $\frac{1}{2}$ sec. cor. of secs. 28 and 33, which is monumented with a sandstone, 16x14x8 ins., firmly set and plainly mkd. $\frac{1}{2}$ on N. face.

Dependent Resurvey, T. 17 S., R. 11 E.

CHAINS

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone, with brass cap mkd.

T17S R11E

¼ S28
S33

1969

Bury orig. stone cor. alongside iron post.

S. 84° 07' W., beginning new measurement.

- 18.05 Draw, drains irregularly N.
- 32.30 Wash, 80 lks. wide, 5 ft. deep, drains irregularly S. 45° E.
- 39.71 The cor. of secs. 28, 29, 32 and 33.
- Land, gently rolling.
Soil, rocky clay.
Timber, scattered juniper and pinon.

N. 1° 18' W., bet. secs. 28 and 29.

Over rolling and broken land, through scattered timber; asc. 45 ft. over rolling S. slope.

- 8.00 Wash, 70 lks. wide, 4 ft. deep, drains N. 40° E.
- 26.70 Graded dirt road, bears irregularly N. 50° E. and S. 50° W.
- 42.52 The ¼ sec. cor. of secs. 28 and 29, which is monumented with a sandstone, 24x10x8 ins., firmly set and plainly mkd. ¼ on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to solid rock and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T17S R11E

¼
S29 | S28

1969

Set orig. stone cor. alongside iron post.

N. 0° 07' E., beginning new measurement.

Ascend 65 ft. over S. slope.

- 2.60 Top of ascent; desc. 50 ft. over rolling N. slope.

Dependent Resurvey, T. 17 S., R. 11 E.

CHAINS

- 40.61 Point for the cor. of secs. 20, 21, 28 and 29 at proportionate distance. There is no remaining evidence of the orig. cor.
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground and in a collar of stone, with brass cap mkd.
- T17S R11E
 $\frac{S20}{S29} | \frac{S21}{S28}$
 1969
- Corner falls in a wash area, draining S. 30° W.
- Land, rolling and broken.
 Soil, rocky clay.
 Timber, scattered juniper and pinon.
-
- From the cor. of secs. 21, 22, 27 and 28.
- N. $89^\circ 29'$ W., bet. secs. 21 and 28.
- Over rolling and broken land, through scattered timber; asc. 270 ft. over E. slope.
- 1.55 Fence, bears N. $20^\circ 30'$ E. and S. $20^\circ 30'$ W.
- 11.20 Fence, bears irregularly N. 15° E. and S. 15° W.
- 15.11 The NW. corner of Cleveland Lloyd Dinosaur Building, bears S. 88 lks. dist.
- 19.685 Point for the E. $1/16$ sec. cor. of secs. 21 and 28.
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., over a cross (X) chiseled in solid rock and in a mound of stone, 4 ft. base to top, with brass cap mkd.
- T17S R11E
 $\frac{E1/16}{S28} | \frac{S21}{S28}$
 1969
- Cor. is located under an overhanging S. edge of boulder, 12x6x6 ft.
- 20.50 Same fence, bears N. 25° E. and S. 25° W.
- 27.53 Same fence, bears S. $2^\circ 45'$ E. and N. $2^\circ 45'$ W.
- 31.60 Same fence, bears N. 60° E. and S. 50° W.
- 36.40 Spur, projects S.; desc. 40 ft. over W. slope.
- 39.37 The $\frac{1}{2}$ sec. cor. of secs. 21 and 28, which is monumented with a sandstone, 16x12x6 ins., firmly set and plainly mkd. $\frac{1}{2}$ on N. face.
- At the cor. point
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins. in the ground to solid rock and in a mound of stone, 4 ft. base to top, with brass cap mkd.

Dependent Resurvey, T. 17 S., R. 11 E.

CHAINS

T17S R11E

$$\frac{1}{4} \frac{S21}{S28}$$

1969

Bury orig. stone cor. alongside iron post.

N. 88° 58' W., beginning new measurement.

Ascend 30 ft. over E. slope.

3.50 Top of ascent; desc. 70 ft. over W. slope.

32.30 Wash, 20 lks. wide, 4 ft. deep, drains S. 75° W.

39.72 The cor. of secs. 20, 21, 28 and 29.

Land, rolling and broken.

Soil, rocky clay.

Timber, scattered juniper and pinon.

N. 2° 36' E., bet. secs. 20 and 21.

Over rolling land, through scattered timber; asc. 65 ft. over S. slope.

10.65 Top of ascent; desc. 155 ft. over rolling N. slope.

40.65 The $\frac{1}{4}$ sec. cor. of secs. 20 and 21, which is monumented with a sandstone, 24x24x24 ins., firmly set and plainly mkd. $\frac{1}{2}$ on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 10 ins. in the ground to solid rock and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T17S R11E

$$\frac{1}{4} \frac{S20|S21}{S21}$$

1969

Set orig. stone cor. alongside iron post.

N. 0° 16' W., beginning new measurement.

Desc. 35 ft. over gentle N. slope.

3.10 Wash, 20 lks. wide, 2 ft. deep, drains W.

19.00 Fence, bears N. 68° W. and S. 68° E.

24.00 Wash, 20 lks. wide, 2 ft. deep, drains irregularly W.; asc. 75 ft. over S. slope.

40.95 The cor. of secs. 16, 17, 20 and 21, which is monumented with a sandstone, 16x14x3 ins., firmly set and plainly mkd. 4 notches on E. and 3 notches on S. edges.

At the cor. point

Dependent Resurvey, T. 17 S., R. 11 E.

CHAINS

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 8 ins. in the ground to solid rock and in a mound of stone, $3\frac{1}{2}$ ft. base to top, with brass cap mkd.

T17S R11E
 $\frac{S17}{S20} | \frac{S16}{S21}$

1969

Set orig. stone cor. alongside iron post.

Land, rolling.

Soil, rocky clay.

Timber, scattered juniper and pinon.

From the cor. of secs. 15, 16, 21 and 22.

N. $89^{\circ} 15'$ W., bet. secs. 16 and 21.

Over rolling land, through scattered timber; asc. 85 ft. over E. slope.

3.00 Trail road, bears N. 40° W. and S. 40° E.

15.80 Top of ascent; desc. 40 ft. over W. slope.

30.00 Wash, drains N.

40.03 The $\frac{1}{4}$ sec. cor. of secs. 16 and 21, which is monumented with a limestone, 14x12x6 ins., firmly set and plainly mkd. $\frac{1}{4}$ on N. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T17S R11E
 $\frac{1}{4} \frac{S16}{S21}$

1969

Bury orig. stone cor. alongside iron post.

S. $89^{\circ} 54'$ W., beginning new measurement.

Desc. 30 ft. over rolling W. slope.

40.22 The cor. of secs. 16, 17, 20 and 21.

Land, rolling.

Soil, rocky clay.

Timber, scattered juniper and pinon.

N. $0^{\circ} 22'$ W., bet. secs. 16 and 17.

Over rolling land, through scattered timber.

1.20 Top of ridge, bears E. and W.; desc. 30 ft. over N. slope.

Dependent Resurvey, T. 17 S., R. 11 E.

CHAINS

- 18.60 Wash, drains irregularly NW.; asc. 20 ft. over S. slope.
 27.80 Top of spur, projects W.; desc. 20 ft. over N. slope.
 31.77 Wash, drains irregularly W.; asc. 30 ft. over SW. slope.
 40.44 The $\frac{1}{2}$ sec. cor. of secs. 16 and 17, which is monumented with a limestone, 12x9x7 ins., firmly set and plainly mkd. $\frac{1}{2}$ on W. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground and in a collar of stone, with brass cap mkd.

T17S R11E

$\frac{1}{2}$

S17|S16

1969

Set orig. stone cor. alongside iron post.

N. $1^{\circ} 22'$ W., beginning new measurement.

Descend 80 ft. over N. slope.

10.00 Trail road, bears irregularly W. and S. 80° E.

23.80 Wash, drains irregularly NE.

34.70 Ascend 40 ft. over SE. slope.

40.60 The cor. of secs. 8, 9, 16 and 17, which is monumented with a sandstone, 14x14x7 ins., firmly set and plainly mkd. 4 notches on the E. and S. edges.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 12 ins. in the ground to solid rock and in a mound of stone, $3\frac{1}{2}$ ft. base to top, with brass cap mkd.

T17S R11E

S8|S9

S17|S16

1969

Set orig. stone cor. alongside iron post.

Land, rolling.

Soil, rocky clay.

Timber, scattered juniper and pinon.

From the cor. of secs. 9, 10, 15 and 16.

N. $87^{\circ} 52'$ W., bet. secs. 9 and 16.

Over rolling land, through scattered timber; asc. 105 ft. over E. slope.

18.00 Top of ascent; desc. 65 ft. over W. slope.

Dependent Resurvey, T. 17 S., R. 11 E.

CHAINS

38.32 Point for the $\frac{1}{2}$ sec. cor. of secs. 9 and 16 at proportionate distance. There is no remaining evidence of the orig. cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground and in a collar of stone, with brass cap mkd.

T17S R11E

$\frac{1}{2}$ $\frac{S9}{S16}$

1969

Descend 20 ft. over rolling W. slope.

68.60 Wash, 50 lks. wide, 4 ft. deep, drains irregularly N. 35° W.

76.64 The cor. of secs. 8, 9, 16 and 17.

Land, rolling.

Soil, rocky clay.

Timber, scattered juniper and pinon.

N. $0^\circ 57'$ W., bet. secs. 8 and 9.

Over rolling hills, through scattered timber; asc. 5 ft. over S. slope.

2.30 Descend 70 ft. over N. slope into draw.

14.05 Wash, 30 lks. wide, 3 ft. deep, drains irregularly NW.; asc. 30 ft. over SW. slope.

23.55 Point of spur, projects W.; desc. 40 ft. over NE. slope.

29.55 Bottom of hollow, drains W.; asc. 40 ft. over SW. slope.

33.30 Point of spur, projects W.; desc. 60 ft. over N. slope.

37.40 Wash, drains NW.; asc. to cor. over SW. slope.

40.61 The $\frac{1}{2}$ sec. cor. of secs. 8 and 9, which is monumented with a sandstone, 14x8x6 ins., firmly set and plainly mkd. $\frac{1}{2}$ on W. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins. in the ground and in a collar of stone, with brass cap mkd.

T17S R11E

$\frac{1}{2}$
S8|S9

1969

Bury orig. stone cor. alongside iron post.

N. $2^\circ 17'$ W., beginning new measurement.

Asc. 20 ft. over gentle S. slope.

Dependent Resurvey, T. 17 S., R. 11 E.

CHAINS

13.00 Top of ascent; desc. 80 ft. over N. slope.

44.72 The cor. of secs. 4, 5, 8 and 9, which is monumented with a badly deteriorated sandstone, 14x10x8 ins. (record 16x14x12 ins.), firmly set in a mound of stone, markings nearly obliterated.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T17S R11E

S5	S4
S8	S9

1969

Bury orig. stone cor. alongside iron post.

Raise a mound of stone, 2½ ft. base, 1½ ft. high, N. of cor.

Land, rolling.

Soil, rocky clay.

Timber, scattered juniper and pinon.

From the cor. of secs. 3, 4, 9 and 10.

N. 86° 29' W., bet. secs. 4 and 9.

Over rolling hills, through scattered timber; desc. 95 ft. over W. slope.

30.00 Draw, drains N. 45° W. from S. 30° W.; asc. 50 ft. over E. slope.

37.30 Spur, bears N. and S.; desc. along a NW. slope.

40.78 Point for the ¼ sec. cor. of secs. 4 and 9 at proportionate distance. There is no remaining evidence of the orig. cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground and in a collar of stone, with brass cap mkd.

T17S R11E

¼	S4
	S9

1969

46.00 Wash, drains N. 45° E. from S. 45° E.; asc. 15 ft. over E. slope.

38.10 Descend 55 ft. over W. slope.

74.50 Wash, drains N.

81.56 The cor. of secs. 4, 5, 8 and 9.

Land, rolling.

Soil, rocky clay.

Timber, scattered juniper and pinon.

North bet. secs. 4 and 5.

Dependent Resurvey, T. 17 S., R. 11 E.

CHAINS

Over rolling hills, through widely scattered timber;
desc. 10 ft. over N. slope.

- 1.50 Trail road, bears N. 30° E. and S. 20° W.
- 5.00 Wash, 4.00 chs. wide, 6 ft. deep, drains irregularly N.
30° E.
- 11.00 Fence, bears N. 39° 45' E. and S. 39° 45' W.; asc. 90 ft.
over SE. slope.
- 16.65 Spur, projects E.
- 21.75 Descend 145 ft. over NW. slope.
- 37.00 Gully, drains irregularly N. 40° W.
- 40.11 The $\frac{1}{2}$ sec. cor. of secs. 4 and 5, which is monumented
with a sandstone, 18x8x6 ins., firmly set and plainly
mkd. $\frac{1}{2}$ on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 18 ins.
in the ground and in a collar of stone, with brass cap
mkd.

T17S R11E

$\frac{1}{2}$
S5|S4

1969

Bury orig. stone cor. alongside iron post.

N. 2° 31' E., beginning new measurement.

Ascend 40 ft. over S. slope.

- 4.60 Gully, drains irregularly N. 30° W.
- 5.00 Fence, bears N. 48° W. and S. 48° E.
- 14.60 Fence, bears N. 46° E. and S. 46° W.
- 37.97 The cor. of secs. 4, 5, 32 and 33 on the N. bdy. of the
Tp., which is monumented with an iron post, 2 $\frac{1}{2}$ ins. diam.,
10 ins. above ground, with brass cap mkd.

T16S R11E

S32|S33
S5|S4

T17S R11E

1969

Land, rolling.

Soil, rocky clay.

Timber, widely scattered juniper and pinon.

From the cor. of secs. 31 and 32 on the S. bdy. of the
Tp.

N. 1° 12' E., bet. secs. 31 and 32.

Over rolling hills, through widely scattered timber;
desc. 30 ft. over gentle NW. slope.

Dependent Resurvey, T. 17 S., R. 11 E.

CHAINS

20.00 Wash, 1.20 chs. wide, 4 ft. deep, drains irregularly N. 30° E.

30.15 Descend 15 ft. over N. slope.

35.33 The $\frac{1}{2}$ sec. cor. of secs. 31 and 32, which is monumented with a sandstone, 12x10x3 ins., firmly set and plainly mkd. $\frac{1}{2}$ on W. face (record calls for a sandstone, 16x14x8 ins.).

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground and in a collar of stone, with brass cap mkd.

T17S R11E

$\frac{1}{2}$

S31|S32

1969

Bury orig. stone cor. alongside iron post.

N. 0° 25' W., beginning new measurement.

9.00 Wash, drains N. 45° E.; asc. 40 ft. over a S. slope.

40.44 Point for the cor. of secs. 29, 30, 31 and 32 at proportionate distance. There is no remaining evidence of the orig. cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground and in a collar of stone, with brass cap mkd.

T17S R11E

S30|S29

S31|S32

1969

Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.

Land, rolling.

Soil, rocky clay.

Timber, widely scattered juniper and pinon.

From the cor. of secs. 28, 29, 32 and 33.

N. 86° 09' W., bet. secs. 29 and 32.

Over gently rolling land, through scattered timber; asc. 25 ft. over gentle E. slope.

6.10 Wash, 40 lks. wide, 2 ft. deep, drains irregularly N.

13.50 Trail road, bears irregularly N. 15° W. and S. 15° E.

27.60 Wash, 80 lks. wide, 5 ft. deep, drains N. 70° E.; desc. 15 ft. over gentle W. slope.

30.00 Trail road, bears N. 80° E. and S. 80° W.

Dependent Resurvey, T. 17 S., R. 11 E.

CHAINS

- 35.50 Recross same wash, drains S. 70° E.
- 40.57 The $\frac{1}{2}$ sec. cor. of secs. 29 and 32, which is monumented with a sandstone, 24x12x4 ins., firmly set and plainly mkd. $\frac{1}{2}$ on N. face.
- At the cor. point
- Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.
- T17S R11E
 $\frac{1}{2}$ $\frac{S29}{S32}$
 1969
- Bury orig. stone cor. alongside iron post.
- Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.
-
- S. 89° 15' W., beginning new measurement.
- Ascend 50 ft. over gentle E. slope.
- 14.30 Wash, 60 lks. wide, 4 ft. deep, drains irregularly N. 10° E.
- 25.00 Top of ascent; desc. 10 ft. over gentle W. slope.
- 30.00 Wash, drains N. 70° E.
- 39.63 The cor. of secs. 29, 30, 31 and 32.
- Land, gently rolling.
 Soil, rocky clay.
 Timber, scattered juniper and pinon.
-
- N. 88° 48' W., bet. secs. 30 and 31.
- Over gently rolling land, through scattered timber; asc. 25 ft. over gentle E. slope.
- 5.25 Top of ascent; desc. 45 ft. over gentle W. slope.
- 24.00 Wash, 50 lks. wide, 3 ft. deep, drains irregularly N.; asc. 125 ft. over E. slope.
- 34.10 Top of ledge; desc. 35 ft. over gentle SW. slope.
- 39.63 Point for the $\frac{1}{2}$ sec. cor. of secs. 30 and 31 at proportionate distance. There is no remaining evidence of the orig. cor.
- Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground and in a collar of stone, with brass cap mkd.
- T17S R11E
 $\frac{1}{2}$ $\frac{S30}{S31}$
 1969

Dependent Resurvey, T. 17 S., R. 11 E.

CHAINS

77.28

The cor. of secs. 25, 30, 31 and 36 on the W. bdy. of the Tp., which is monumented with an iron post, 2½ ins. diam., set in a mound of stone, 15 ins. above ground, with brass cap mkd.

T17S
R10E R11E
S25|S30
S36|S31

1969

Land, gently rolling.
Soil, rocky clay.
Timber, scattered juniper and pinon.

From the cor. of secs. 29, 30, 31 and 32.

N. 1° 09' W., bet. secs. 29 and 30.

Over gently rolling hills, through scattered timber; asc. 120 ft. over S. slope.

33.40

Wash, 1.00 ch. wide, 15 ft. deep, drains irregularly S. 80° E.

40.45

The ¼ sec. cor. of secs. 29 and 30, which is monumented with a sandstone, 17x8x4 ins., firmly set and plainly mkd. ¼ on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground to solid rock and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T17S R11E
^¼
S30|S29
1969

Bury orig. stone cor. alongside iron post.

N. 0° 47' E., beginning new measurement.

Descend 140 ft. over N. slope.

25.70

Bottom of descent; asc. 30 ft. over S. slope.

40.28

Point for the cor. of secs. 19, 20, 29 and 30 at proportionate distance. There is no remaining evidence of the orig. cor.

Set an iron post, 30 ins. long, 2½ ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T17S R11E
S19|S20
S30|S29
1969

Dependent Resurvey, T. 17 S., R. 11 E.

CHAINS

Raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.

Land, gently rolling.
Soil, rocky clay.
Timber, scattered juniper and pinon.

From the cor. of secs. 20, 21, 28 and 29.

S. 89° 51' W., bet. secs. 20 and 29.

Over gently rolling land, through scattered timber; asc. 40 ft. over E. slope.

7.50 Top of ascent; desc. 90 ft. over W. slope.

24.90 Draw, drains irregularly N. 60° W.

33.15 Draw, drains irregularly S. 30° W.

39.00 Same draw, drains N. 45° W.

39.73 Point for the ½ sec. cor. of secs. 20 and 29 at proportionate distance. There is no remaining evidence of the orig. cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in the ground and in a collar of stone, with brass cap mkd.

T17S R11E
S20
S29
1969

53.70 Wash, 30 lks. wide, 3 ft. deep, drains irregularly N.

55.45 Graded dirt road, bears irregularly N. and S. 15° E.

75.45 Draw, drains irregularly N. 50° E.

79.46 The cor. of secs. 19, 20, 29 and 30.

Land, gently rolling.
Soil, rocky clay.
Timber, scattered juniper and pinon.

N. 89° 31' W., bet. secs. 19 and 30.

Over gently rolling hills, through widely scattered timber; desc. 50 ft. over W. slope.

19.00 Wash, 30 lks. wide; 2 ft. deep, drains N. 45° E.; asc. 35 ft. over E. slope.

32.00 Wash, 20 lks. wide, 2 ft. deep, drains S. 45° E.

37.60 Wash, 20 lks. wide, 2 ft. deep, drains N. 45° E.

39.70 Point for the ½ sec. cor. of secs. 19 and 30 at proportionate distance. There is no remaining evidence of the orig. cor.

Dependent Resurvey, T. 17 S., R. 11 E.

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T17S R11E

$$\frac{S19}{S30}$$

1969

Raise a mound of stone, 3 ft. base, 1½ ft. high, N. of cor.

Ascend 95 ft. over SE. slope.

68.95 Low spur, slopes N. 15° W.

75.25 Rocky point, projects N.; desc. 40 ft. over rocky W. slope.

77.06 The cor. of secs. 19, 24, 25 and 30, which is monumented with an iron post, 2½ ins. diam., 12 ins. above ground, set in a mound of stone, with brass cap mkd.

T17S

R10E R11E

$$\frac{S24 \ S19}{S25 \ S30}$$

1969

Land, gently rolling.

Soil, rocky clay.

Timber, widely scattered juniper and pinon.

From the cor. of secs. 19, 20, 29 and 30.

N. 0° 58' E., bet. secs. 19 and .

Over gently rolling land, through scattered timber; desc. 60 ft. over N. slope.

28.90 Wash, 60 ft. wide, 5 ft. deep, drains N. 10° E.

69.29 The ¼ sec. cor. of secs. 19 and 20, which is monumented with a sandstone, 14x12x3 ins., firmly set and plainly mkd. on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 4 ins. in the ground to solid rock and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T17S R11E

$$\frac{S19 \ S20}{S20 \ S20}$$

1969

Bury orig. stone cor. alongside iron post.

N. 0° 43' E., beginning new measurement.

Ascend 70 ft. over S. slope.

Dependent Resurvey, T. 17 S., R. 11 E.

CHAINS

- .50 Graded dirt road, bears N. 40° W. and S. 40° E.
- 11.20 Graded dirt road, bears N. 45° 15' W. and S. 45° 15' E.; desc. 70 ft. over N. slope.
- 41.02 The cor. of secs. 17, 18, 19 and 20, which is monumented with a badly deteriorated sandstone, 12x10x3 ins., firmly set in a mound of stone, markings nearly obliterated.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to solid rock and in a mound of stone, 3½ ft. base to top, with brass cap mkd.

T17S R11E

S18	S17
S19	S20
1969	

Bury orig. stone cor. alongside iron post.

Land, gently rolling.

Soil, rocky clay.

Timber, scattered juniper and pinon.

- From the cor. of secs. 16, 17, 20 and 21.
- N. 89° 56' W., bet. secs. 17 and 20.
- Over gently rolling land, through widely scattered timber; desc. 95 ft. over W. slope.
- 34.30 Wash, 30 lks. wide, 3 ft. deep, drains irregularly N.
- 37.50 Wash, 10 lks. wide, 2 ft. deep, drains irregularly N. 15° E.
- 40.02 The ½ sec. cor. of secs. 17 and 20, which is monumented with a sandstone, 18x14x3 ins., firmly set and plainly mkd. ½ on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone, with brass cap mkd.

T17S R11E

½	S17
	S20
1969	

Bury orig. stone cor. alongside iron post.

S. 89° 15' W., beginning new measurement.

Ascend 85 ft. over E. slope.

Dependent Resurvey, T. 17 S., R. 11 E.

CHAINS	
10.45	Fence, bears N. 65° 45' W. and S. 65° 45' E.
20.05	Wash, 60 lks. wide, 4 ft. deep, drains irregularly N. 60° W.
35.15	Draw, drains irregularly N.
39.90	<p>The cor. of secs. 17, 18, 19 and 20.</p> <p>Land, gently rolling. Soil, rocky clay. Timber, widely scattered juniper and pinon.</p>
	S. 88° 54' W., bet. secs. 18 and 19.
	Over gently rolling land, through widely scattered timber; desc. 65 ft. over gentle W. slope.
32.80	Graded dirt road, bears N. 57° W. and S. 57° E.
40.26	<p>The $\frac{1}{2}$ sec. cor. of secs. 18 and 19, which is monumented with sandstone, 18x12x5 ins., firmly set and plainly mkd. $\frac{1}{2}$ on N. face.</p> <p>At the cor. point</p> <p>Set an iron post, 30 ins. long, 2$\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;">T17S R11E $\frac{1}{2}$ $\frac{S18}{S19}$ 1969</p> <p>Bury orig. stone cor. alongside iron post.</p> <p>Raise a mound of stone, 2$\frac{1}{2}$ ft. base, 1$\frac{1}{2}$ ft. high, N. of cor.</p>
	N. 88° 23' W., beginning new measurement.
	Ascend 45 ft. over gentle E. slope.
3.00	Wash, 30 lks. wide, 2 ft. deep, drains irregularly N 50° E.
18.00	Top of ascent; desc. 45 ft. over gentle W. slope.
36.50	Bottom of descent; asc. 20 ft. over gentle E. slope.
38.20	<p>The cor. of secs. 13, 18, 19 and 24 on the W. bdy. of the Tp., which is monumented with an iron post, 2$\frac{1}{2}$ ins. diam., set 10 ins. above ground and in a collar of stone, with a steel fence post, set alongside, with brass cap mkd.</p>
	<p style="text-align: center;">T17S R10E R11E $\frac{S13}{S24}$ $\frac{S18}{S19}$ 1969</p>

Dependent Resurvey, T. 17 S., R. 11 E.

CHAINS

Land, gently rolling.
Soil, rocky clay.
Timber, widely scattered juniper and pinon.

From the cor. of secs. 17, 18, 19 and 20.

N. 0° 49' W., bet. secs. 17 and 18.

Over gently rolling land, through widely scattered timber; desc. 60 ft. over N. slope.

2.05 Wash, 20 lks. wide, 3 ft. deep, drains irregularly N. 85° W.

9.00 Fence, bears N. 72° 30' W. and S. 72° 30' E.

12.00 Wash, drains N. 80° W.

31.90 Wash, 40 lks. wide, 10 ft. deep, drains irregularly N. 75° E., about 50 lks.; thence N.

41.08 The $\frac{1}{2}$ sec. cor. of secs. 17 and 18, which is monumented with a sandstone, 13x8x4 ins., firmly set and plainly mkd. $\frac{1}{2}$ on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 22 ins. in the ground and in a collar of stone, with brass cap mkd.

T17S R11E

$\frac{1}{2}$
S18|S17

1969

Bury orig. stone cor. alongside iron post.

N. 0° 20' W., beginning new measurement.

Descend 35 ft. over gentle N. slope.

28.00 Wash, drains N. 20° W.

35.20 Wash, drains N. 60° W.

39.15 Trail road, bears irregularly N. 60° W. and S. 60° E.

40.57 Point for the cor. of secs. 7, 8, 17 and 18 at proportionate distance. There is no remaining evidence of the orig. cor.

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T17S R11E

S7|S8
S18|S17

1969

Dependent Resurvey, T. 17 S., R. 11 E.

CHAINS

Land, gently rolling.
Soil, rocky clay.
Timber, widely scattered juniper and pinon.

From the cor. of secs. 8, 9, 16 and 17.

N. 89° 33' W., bet. secs. 8 and 17.

Over rolling land, through widely scattered timber; asc. 50 ft. over SE. slope.

6.85 Top of hill; desc. 75 ft. over W. slope.

15.10 Trail road, bears irregularly N. 15° E. and S. 10° W.

39.40 Fence, bears N. 11° 30' E. and S. 11° 30' W.; asc. 25 ft. over E. slope.

40.14 The $\frac{1}{2}$ sec. cor. of secs. 8 and 17, which is monumented with a sandstone, 10x7x3 ins., firmly set and plainly mkd. $\frac{1}{2}$ on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 5 ins. in the ground to solid rock and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T17S R11E

$\frac{1}{2}$ $\frac{S8}{S17}$

1969

Bury orig. stone cor. alongside iron post.

S. 89° 44' W., beginning new measurement.

Descend 85 ft. over W. slope.

16.00 Wash, drains S. 50° W.

29.20 Wash, 30 lks. wide, 3 ft. deep, drains S. 60 lks. to intersection with a wash draining W.

38.00 Wash, drains N. 70° W.

39.30 The cor. of secs. 7, 8, 17 and 18.

Land, gently rolling.
Soil, rocky clay.
Timber, widely scattered juniper and pinon.

N. 89° 27' W., bet. secs. 7 and 18.

Over gently rolling land, through widely scattered timber; asc. 110 ft. over E. slope.

Dependent Resurvey, T. 17 S., R. 11 E.

CHAINS

- 3.50 Trail road, bears N. 60° W. and S. 70° E.
- 8.45 Wash, 1.00 ch. wide, 2 ft. deep, drains N. 25° W.
- 13.60 Crest of small bluff, bears N. 25° W. and S. 25° E.
- 27.15 Top of small knoll; desc. 45 ft. over W. slope.
- 37.65 Low bluff, bears N. 25° W. and S. 25° E.
- 39.31 The $\frac{1}{2}$ sec. cor. of secs. 7 and 18, which is monumented with a sandstone, 18x12x4 ins., firmly set and plainly mkd. $\frac{1}{2}$ on N. face.
- At the cor. point
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 12 ins. in the ground to solid rock and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T17S R11E

$$\frac{1}{2} \frac{S7}{S18}$$

1969

Bury orig. stone cor. alongside iron post.

S. 89° 36' W., beginning new measurement.

Descend 45 ft. over NW. slope.

- 20.30 Wash, 50 lks. wide, 5 ft. deep, drains N. 20° W.; asc. 25 ft. over E. slope.
- 30.40 Trail road, bears irregularly N. and S.
- 31.80 Top of ascent; desc. 40 ft. over W. slope.
- 37.80 Trail road, bears irregularly N. and S.
- 38.18 The cor. of secs. 7, 12, 13 and 18 on the W. bdy. of the Tp., which is monumented with an iron post, $2\frac{1}{2}$ ins. diam., 6 ins. above ground and a steel fence post alongside, with brass cap mkd.

T17S

R10E R11E

$$\frac{S12|S7}{S13|S18}$$

1969

Land, gently rolling.
Soil, rocky clay.
Timber, widely scattered juniper and pinon.

From the cor. of secs. 7, 8, 17 and 18.

N. 0° 02' E., bet. secs. 7 and 8..

Over gently rolling land, through widely scattered timber; asc. 70 ft. over S. slope.

Dependent Resurvey, T. 17 S., R. 11 E.

CHAINS	
.40	Wash, 15 lks. wide, 2 ft. deep, drains irregularly N. 70° W.
28.00	Top of rocky low spur, projects N. 80° E.; desc. 50 ft. over N. slope.
40.57	The $\frac{1}{2}$ sec. cor. of secs. 7 and 8, which is monumented with a sandstone, 15x12x5 ins., firmly set and plainly mkd. $\frac{1}{2}$ on W. face.
	At the cor. point
	Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 12 ins. in the ground to solid rock and in a mound of stone, 4 ft. base to top, with brass cap mkd.
	T17S R11E
	$\frac{1}{2}$ S7 S8
	1969
	Bury orig. stone cor. alongside iron post.
	N. 2° 32' W., beginning new measurement.
	Descend 35 ft. over N. slope.
2.50	Trail road, bears E. and W.; wash, drains N. 20° E.
19.60	Bottom of descent, wash, drains irregularly W.; asc. 45 ft. over S. slope.
25.70	Top of ascent; desc. 30 ft. over N. slope.
40.89	Point for the cor. of secs. 5, 6, 7 and 8 at proportionate distance. There is no remaining evidence of the orig. cor.
	Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T17S R11E
	S6 S5 S7 S8
	1969
	No accessories available.
	Land, gently rolling.
	Soil, clay.
	Timber, widely scattered juniper and pinon.
	From the cor. of secs. 4, 5, 8 and 9.
	S. 87° 17' W., bet. secs. 5 and 8.
	Over gently rolling hills, through shadscale and salt grass; asc. 115 ft. over E. slope.
.57	Trail road, bears irregularly N. and S.

Dependent Resurvey, T. 17 S., R. 11 E.

CHAINS

- 3.85 Wash, 2.00 chs. wide, 4 ft. deep, drains irregularly N. 10° E.
- 6.50 Fence, bears N. 30° E. and S. 30° W.
- 13.50 Top of hill; desc. 95 ft. over W. slope.
- 39.45 Point for the $\frac{1}{2}$ sec. cor. of secs. 5 and 8 at proportionate distance. There is no remaining evidence of the orig. cor.
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 9 ins. in the ground to solid rock and in a mound of stone, $3\frac{1}{2}$ ft. base to top, with brass cap mkd.
- T17S R11E
 $\frac{1}{2}$ $\frac{S5}{S8}$
1969
- Descend 145 ft. over W. slope.
- 45.90 Wash, 50 lks. wide, 3 ft. deep, drains irregularly N. 25° W.
- 78.90 The cor. of secs. 5, 6, 7 and 8.
- Land, gently rolling.
Soil, clay.
No timber.
Undergrowth, shadscale and salt grass.
-
- S. 89° 57' W., bet. secs. 6 and 7.
- Over gently rolling land, through shadscale and salt grass; desc. 60 ft. over gentle W. slope.
- 14.50 Wash, drains N. 45° W.
- 39.00 Trail road, bears S. 20° E., and W.; thence along S. side of road.
- 39.43 Point for the $\frac{1}{2}$ sec. cor. of secs. 6 and 7 at proportionate distance. There is no remaining evidence of the orig. cor.
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.
- T17S R11E
 $\frac{1}{2}$ $\frac{S6}{S7}$
1969
- Set a steel fence post, 6 ft. long, 2 ft. in the ground, alongside iron post.
- Descend 10 ft. over gentle W. slope, along S. side of road.
- 44.50 Leave trail road, bears N. 60° W., and E.
- 60.00 Irrigation ditch, drains N. 40° E., irregularly.

Dependent Resurvey, T. 17 S., R. 11 E.

CHAINS	
73.00	Recross irrigation ditch, drains S. 45° E.
75.50	Recross irrigation ditch, drains N.
76.20	The cor. of secs. 1, 6, 7 and 12 on the W. bdy. of the Tp., which is monumented with an iron post, 2½ ins. in diam., 6 ins. above ground and a steel fence post alongside, with brass cap mkd.
	T17S R10E R11E S1 S6 S12 S7 1969
	Land, gently rolling. Soil, clay. No timber. Undergrowth, shadscale and salt grass.
	From the cor. of secs. 5, 6, 7 and 8.
	N. 1° 32' E., bet. secs. 5 and 6.
	Over gently rolling land, through scattered undergrowth; desc. 50 ft. over gentle N. slope.
5.25	Wash, 12 lks. wide, 1 ft. deep, drains irregularly N. 40° W.
40.86	The ¼ sec. cor. of secs. 5 and 6, which is monumented with a badly deteriorated sandstone, 12x8x3 ins., firmly set in a mound of stone, marking nearly obliterated (record calls for a sandstone 16x12x3 ins.).
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T17S R11E ¼ S6 S5 1969
	Bury orig. stone cor. alongside iron post.
	Raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor.
	N. 2° 11' W., beginning new measurement.
	Continue over nearly level land.
8.90	Irrigation ditch, 15 lks. wide, 2 ft. deep, drains irregularly E.

Dependent Resurvey, T. 17 S., R. 11 E.

CHAINS

- 20.08 Point for the N. 1/16 sec. cor. of secs. 5 and 6 at proportionate distance.
- Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
- T17S R11E
N
1/16
S6|S5
1969
- 40.56 The cor. of secs. 5, 6, 31 and 32 on the N. bdy. of the Tp., which is monumented with an iron post, 2½ ins. in diam., 6 ins. above ground and a steel fence post along-side, with brass cap mkd.
- T16S R11E
S31|S32
S6|S5
T17S R11E
1969
- Land, nearly level to gently rolling.
Soil, clay.
No timber.
Undergrowth, shadscale and greasewood.

General Description

A considerable variety of land and soil is found in Township 17 South, Range 11 East. The general elevation of the township ranges from about 5,500 feet above sea level, along the west boundary to about 6,000 feet above sea level along the rough east portion of the township. The soil is a rocky clay along the east portion to a sandy clay along the west portion of the township. The timber consists of dense to widely scattered juniper and pinon throughout the township. The undergrowth is mostly shadscale and some greasewood. The township is accessible by an improved dirt road from Cleveland to the Cleveland Lloyd Dinosaur Quarry and by numerous trail roads located throughout the township. The Cleveland Lloyd Dinosaur Quarry is located in the NE¼NE¼ of sec. 28 and the SE¼SE¼ of sec. 21. There is also a building located near the quarry. The general drainage of the township is in a northerly direction. No water was noted.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS

NAMES	CAPACITY
Milton R. Workman	Supervisory Survey Technician
H. Dennis Badger	Supervisory Survey Technician
Ferrel D. Reynolds	Supervisory Survey Technician
Jay Hyatt	Surveying Aid
Gail Reynolds	Surveying Aid
Rodger Stewart	Surveying Aid
Patrick D. Costello	Surveying Aid
Craig K. Gardner	Surveying Aid
James E. Stuercke	Surveying Aid
Charles E. Madsen	Surveying Aid
Mark Fairbanks	Surveying Aid

CERTIFICATE OF SURVEY

I, Craig P. Sylvester, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 4th day of April, 1969, I have dependently resurveyed the west 4 miles of the South Boundary, and dependently resurveyed a portion of the subdivisional lines of Township 17 South, Range 11 East

of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

March 30, 1970
(Date)

Craig P. Sylvester
(Cadastral Surveyor)

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

SUBMITTED FOR APPROVAL
Date MAR 16 1971

BUREAU OF LAND MANAGEMENT,
Washington, D. C.

The foregoing field notes of the dependent resurvey of the west 4 miles of the South Boundary, and dependent resurvey of a portion of the subdivisional lines of Township 17 South, Range 11 East, Salt Lake Meridian, Utah

executed by Craig P. Sylvester, Supervisory Cadastral Surveyor having been critically examined and found correct, are hereby approved.

JUN 2 1971
(Date)

Clark F. Sumner
(Chief, Division of Engineering)
Chief, Division of Cadastral Survey

CERTIFICATE OF TRANSCRIPT

~~I CERTIFY That the foregoing transcript of the field notes of the above-described surveys in~~
~~, is a true copy of the original field notes.~~

~~(Date)~~

~~(Chief, Division of Engineering)~~

Blank

Page

Blank

Page

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

DIXIE NATIONAL FOREST

317

ORIGINAL
FIELD NOTES

OF THE

REMONUMENTATION OF CORNERS

IN

TOWNSHIP 33 SOUTH, RANGE 2 WEST

TOWNSHIP 36 SOUTH, RANGE 18 WEST

TOWNSHIP 33 SOUTH, RANGE 3 WEST

TOWNSHIP 37 SOUTH, RANGE 7 WEST

TOWNSHIP 33 SOUTH, RANGE 6 WEST

TOWNSHIP 37 SOUTH, RANGE 13 WEST

TOWNSHIP 35 SOUTH, RANGE 3 WEST

TOWNSHIP 37 SOUTH, RANGE 14 WEST

TOWNSHIP 35 SOUTH, RANGE 4 WEST

TOWNSHIP 37 SOUTH, RANGE 15 WEST

TOWNSHIP 35 SOUTH, RANGE 6 WEST

TOWNSHIP 37 SOUTH, RANGE 16 WEST

TOWNSHIP 35 SOUTH, RANGE 7 WEST

TOWNSHIP 37 SOUTH, RANGE 18 WEST

TOWNSHIP 36 SOUTH, RANGE 6 WEST

TOWNSHIP 38 SOUTH, RANGE 9 WEST

TOWNSHIP 36 SOUTH, RANGE 7 WEST

TOWNSHIP 38 SOUTH, RANGE 14 WEST

TOWNSHIP 36 SOUTH, RANGE 8 WEST

TOWNSHIP 39 SOUTH, RANGE 6 WEST

TOWNSHIP 36 SOUTH, RANGE 9 WEST

TOWNSHIP 40 SOUTH, RANGE 13 WEST

TOWNSHIP 36 SOUTH, RANGE 15 WEST

TOWNSHIP 40 SOUTH, RANGE 14 WEST

TOWNSHIP 36 SOUTH, RANGE 16 WEST

TOWNSHIP 41 SOUTH, RANGE 15 WEST

Of the SALT LAKE Meridian,

In the State of UTAH

EXECUTED BY

FERREL D. REYNOLDS

SURVEYING TECHNICIAN

Under special instructions dated FEBRUARY 15, 19 61, which provided for the surveys

included under Group Number 447, approved FEBRUARY 16, 1961,

and assignment instructions dated MAY 26, 19 69.

Survey commenced JUNE 4, 19 68

Survey completed JULY 11, 19 68

INDEX DIAGRAM

Township _____, Range _____

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

INDEX TO SECTION CORNER MONUMENTS

Tp. 33 S R. 2W Mer. SALT LAKE

6	5	4	3	2	1
7	8 ₃	9	10	11	12
18	17	2 ₂ 16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Tp. 33 S R. 3 W Mer. SALT LAKE

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Tp. 33 S R. 6 W Mer. SALT LAKE

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Blank

Page

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

INDEX TO SECTION CORNER MONUMENTS

Tp. 35 S R. 7 W Mer. SALT LAKE

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28 12	27	26	25
31	32	33	34	35	36

Tp. 36 S. R. 6 W Mer. SALT LAKE

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14 12	13 11 12
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Tp. 36 S R. 7 W Mer. SALT LAKE

6	5 15	4	14 3 13	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20		12	23	24
30	15 29 14			26	25
31				35	36

Blank

Page

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

INDEX TO SECTION CORNER MONUMENTS

Tp. 35 S R. 7 W Mer. SALT LAKE

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28 12	27	26	25
31	32	33	34	35	36

Tp. 36 S R. 6 W Mer. SALT LAKE

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14 12	13 11 12
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Tp. 36 S R. 7 W Mer. SALT LAKE

6	5 15	4	14 3 13	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	15 29 14	28	27	26	25
31	32	33	34	35	36

Blank

Page

INDEX TO SECTION CORNER MONUMENTS

Tp. 36 S R. 8 W Mer. SALT LAKE

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	16 16	24
19	18	17	17	23	24
30	18	29	28	27	26
19	18				25
31	32	33	34	35	36

Tp. 36 S R. 9 W Mer. SALT LAKE

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	20
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Tp. 36 S R. 15 W Mer. SALT LAKE

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	21	21	25
31	32	33	34	35	36

Blank

Page

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

INDEX TO SECTION CORNER MONUMENTS

Tp. 36 S R. 16 W Mer. SALT LAKE

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25 ●
31	32	33	34	35	36

Tp. 36 S R. 18 W Mer. SALT LAKE

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	23 ●	32	33	34	35
23		22 ●			

Tp. 37 S R. 7 W Mer. SALT LAKE

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32 ●	25	33	34	35
					36

Blank

Page

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

INDEX TO SECTION CORNER MONUMENTS

Tp. 37 S R. 13 W Mer. SALT LAKE

6	25 ● 5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Tp. 37 S R. 14 W Mer. SALT LAKE

6	5	28 ● 27 4	27 3	26 2	1
7	8	● 9	● 10	● 11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Tp. 37 S R. 15 W Mer. SALT LAKE

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	29 34 ●	28 35 ●	36

Blank

Page

INDEX TO SECTION CORNER MONUMENTS

Tp. 37 S R. 16 W Mer. SALT LAKE

6	5	4	3	2	1
7	8	● 31 ⁹	10 ³⁰	● 30 ¹¹	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	● 29 ³⁶

Tp. 37 S R. 18 W Mer. SALT LAKE

6	5	● 33 ⁴	3	● 32 ²	● 31 ¹
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Tp. 38 S R. 9 W Mer. SALT LAKE

6	5	4	● 34	● 35 ²	1
7	8	9	10	● 34	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

328
326

Blank

Page

INDEX TO SECTION CORNER MONUMENTS

Tp. 38 S R. 14 W Mer SALT LAKE

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30 36	36 29 35	28	27	26	25
31	32	33	34	35	36

Tp. 39 S R. 6 W Mer SALT LAKE

6	5	4	3	2	1
7	8	9	10	11	12
		37			
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Tp. 40 S R. 13 W Mer SALT LAKE

6	5	4	3	2	1	
			39	40		
7	8	9	10	39	12	
			42	38		
18	17	16	15	38	13	
			41	38		
19	20	21	40	22	23	24
		43	43			
		42				
30	29	28	27	26	25	
37	44	44				
31	32	33	34	35	36	

Blank

Page

INDEX TO SECTION CORNER MONUMENTS

Tp. 40 S R. 14 W Mer. SALT LAKE

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

46 (at intersection of 22 and 26)

45 (at intersection of 25 and 36)

45 (at intersection of 33 and 34)

Tp. 41 S R. 15 W Mer. SALT LAKE

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

48 (at intersection of 8 and 17)

47 (at intersection of 9 and 16)

47 (at intersection of 10 and 15)

48 (at intersection of 11 and 14)

Tp. _____ R. _____ Mer. _____

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Blank

Page

Remonumentation of Corners in T. 33 S., R. 2 W.

CHAINS

The following field notes are those of the remonumentation of certain identified corners selected by the U. S. Forest Service as being located in or controlling the boundaries of Forest Service lands situated in the Dixie National Forest in the following townships:

T. 33 S., R. 2 W.	T. 36 S., R. 18 W.
T. 33 S., R. 3 W.	T. 37 S., R. 7 W.
T. 33 S., R. 6 W.	T. 37 S., R. 13 W.
T. 35 S., R. 3 W.	T. 37 S., R. 14 W.
T. 35 S., R. 4 W.	T. 37 S., R. 15 W.
T. 35 S., R. 6 W.	T. 37 S., R. 16 W.
T. 35 S., R. 7 W.	T. 37 S., R. 18 W.
T. 36 S., R. 6 W.	T. 38 S., R. 9 W.
T. 36 S., R. 7 W.	T. 38 S., R. 14 W.
T. 36 S., R. 8 W.	T. 39 S., R. 6 W.
T. 36 S., R. 9 W.	T. 40 S., R. 13 W.
T. 36 S., R. 15 W.	T. 40 S., R. 14 W.
T. 36 S., R. 16 W.	T. 41 S., R. 15 W.

The position of each corner was marked by the original monument or determined from corner accessories recorded in the survey record. The monumentation was requested by and accomplished in cooperation with the Forest Service.

T. 33 S., R. 2 W.

Township 33 South, Range 2 West, Salt Lake Meridian, is located partially within the Dixie National Forest. The boundaries and subdivisional lines were surveyed by J. G. Burrill and T. C. Bailey in 1876.

At the cor. of secs. 19, 24, 25 and 30, on the W. bdy. of the Tp., marked with a granite stone, 10x7x4 ins., firmly set and plainly mkd. with 4 notches on N. and 2 on S. edge.

At the cor. point

Set an iron post, 30 ins. long 2½ ins. in diam., 13 ins. in the ground and in a mound of stone 3½ ft. base to brass cap mkd.

T33S
R3W R2W

S24|S19
S25|S30

1968

Deposit the original stone alongside the cor.

The cor. is located on S. slope of spur projecting E. 60 lks. dist. N. of trail road that bears E. and W. approx. 10 chs. dist. N. of Rock Creek that drains E. In sagebrush growth, no timber.

Remonumentation of Corners in T. 33 S., R. 2 W.

CHAINS

At the cor. of secs. 16, 17, 20 and 21, marked with a trachyte, 12x10x8 ins., firmly set and plainly mkd. with 4 notches on E. and 3 notches on S. edge.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 15 ins. in the ground and in a mound of stone 3 ft. base to brass cap mkd.

T33S R2W

S17	S16
S20	S21

1968

Deposit the original stone alongside the cor.

The cor. is located on the top of a spur projecting E. $21\frac{1}{2}$ lks. W. of 4 strand Forest Bdy. fence line that bears N. and S. In scattered pinon growth.

At the $\frac{1}{2}$ sec. cor. of secs. 16 and 17, marked with a trachyte stone, 20x15x10 ins., firmly set and plainly mkd. $\frac{1}{2}$ on W. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground and raise a mound of stone, 3 ft. base $1\frac{1}{2}$ ft. high to W. Brass cap mkd.

T33S R2W

$\frac{1}{2}$	S16
S17	S16

1968

Deposit the original stone alongside the cor.

The cor. is located on SE. slope of spur projecting N. 50° E., in scattered pinon and juniper growth. Four lks. E. of 4 strand Forest Bdy. fence line that bears N. and S.

At the $\frac{1}{2}$ sec. cor. of secs. 29 and 30, marked with a granite stone, 12x12x10 ins., firmly set and plainly mkd. $\frac{1}{2}$ on W. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam. 14 ins. in the ground in a mound of stone 3 ft. base to brass cap mkd.

T33S R2W

$\frac{1}{2}$	S29
S30	S29

1968

Deposit the original stone alongside the cor.

Remonumentation of Corners in T. 33 S., R. 2 W.

CHAINS

The cor. is located in large sagebrush flat 45 lks. E. of trail road that bears S. by N. 30° W. and 124 lks. N. of 4 strand fence line that bears E. and W. No timber.

At the cor. of secs. 19, 20, 29 and 30, marked with a trachyte stone, 14x12x8 ins., firmly set and plainly mkd. with 5 notches on E. and 2 on S. edge.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 18 ins. in the ground and in a collar of stone to brass cap mkd.

T33S R2W

S19	S20
S30	S29

1968

Deposit the original stone alongside the cor.

The cor. is located in sagebrush flat 31 lks. W. of 4 strand fence line that bears N. and W. at cor. 25 lks. E. of Rock Creek Road that bears N. 70° W. and N. on turn. No timber.

At the ¼ sec. cor. of secs. 8 and 17 mkd. with a sandstone, 12x10x6 ins., firmly set and plainly mkd. ¼ on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground and in a collar of stone to brass cap mkd.

T33S R2W

¼ S8	S17
------	-----

1968

Deposit the original stone alongside the cor.

The cor. is located on NW. slope of hill 120 lks. E. of wash, 15 lks. wide, 2 ft. deep, drains N. 45° E. 106 lks. S. of 4 strand Forest Bdy. fence line that bears E. and W. Scattered pine and juniper growth.

At the ¼ sec. cor. of secs. 19 and 30, mkd. with a granite stone, 12x8x6 ins., firmly set and plainly mkd. ¼ on north face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 15 ins. in the ground and in a mound of stone 3 ft. base to brass cap mkd.

Remonumentation of Corners in T. 33 S., R. 2 W.

CHAINS

T33S R2W

$$\frac{1}{2} \frac{S19}{S30}$$

1968

Deposit the original stone alongside the cor.

The cor. is located on rolling sagebrush flat approx. 5.00 chs. distance N. of trail road that bears N. 80° E. and S. 80° W. No timber.

T. 33 S., R. 3 W.

Township 33 South, Range 3 West, Salt Lake Meridian, is located within the Dixie National Forest. The boundaries and subdivisional lines were surveyed by T. C. Bailey and J. G. Burrill in 1876.

At the $\frac{1}{2}$ sec. cor. of secs. 24 and 25 marked with a granite stone, 18x18x12 ins., firmly set and plainly mkd. $\frac{1}{2}$ on N. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 14 ins. in the ground and in a mound of stone $3\frac{1}{2}$ ft. base to brass cap mkd.

T33S R3W

$$\frac{1}{2} \frac{S24}{S25}$$

1968

Deposit the original stone in mound alongside the cor.

The cor. is located on SE. slope of ridge that bears E. and S. in scattered pine and juniper growth.

T. 33 S., R. 6 W.

Township 33 South, Range 6 West, Salt Lake Meridian, is located partially within the Dixie National Forest. The township bdy., between ranges 5 and 6 W., was surveyed by T. C. Bailey and J. G. Burrill in 1874 and retraced by C. J. Terry and Ralph Gentry in 1920.

At the cor. of secs. 13, 18, 19 and 24, marked with a sandstone, 18x12x8 ins., firmly set and plainly mkd. with 3 notches on the N. and S. edges.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 10 ins. in the ground and in a mound of stone $3\frac{1}{2}$ ft. base to brass cap mkd.

T33S

R6W R5W

$$\frac{S13}{S24} \frac{S18}{S19}$$

1968

Remonumentation of Corners in T. 33 S., R. 6 W.

CHAINS

Deposit the original stone in mound alongside the cor.

The cor. is located in large sagebrush flat at the cor. of 4 strand forest bdy. fence line that bears N. and W. No timber.

T. 35 S., R. 3 W.

Township 35 South, Range 3 West, Salt Lake Meridian, is located partially within the Dixie National Forest. The boundaries and subdivisional lines were surveyed by T. C. Bailey in 1876.

At the standard cor. of sec. 31 and 32, on the S. bdy. of the tp., (The Seventh Standard Parallel South) mkd. with a limestone, 18x12x8 ins., firmly set and plainly mkd. with 5 notches on E. and 1 on W. edge and SC on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone to brass cap mkd.

SC
T35S R3W
S31 S32
S6
T36S R3W
1968

Deposit the original stone alongside the cor.

The cor. is located on nearly level land 6 lks. S. of cor. of 4 strand fence line that bears E., W. and N. In sagebrush growth, no timber.

At the ¼ sec. cor. of secs. 31 and 36, on W. bdy. of tp., mkd. with a sandstone, 12x8x6 ins., firmly set and plainly mkd. ¼ on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone to brass cap mkd.

T35S
R4W R3W
¼
S36 S31
1968

Deposit the original stone alongside the cor.

The cor. is located on nearly level land at the cor. of old 4 strand fence line that bears N. and E. In sagebrush growth, no timber.

Remonumentation of Corners in T. 35 S., R. 3 W.

CHAINS

A the cor. of secs. 25, 30, 31 and 36, on the W. bdy. of tp., mkd. with a sandstone, 15x12x6 ins., firmly set and plainly mkd. with 5 notches on the N. and 1 on the S. edge.

from which

A ponderosa pine, 20 ins. diam., bears N. 55° E., 302 lks. dist., mkd. T35S R3W S30 BT. (Record N. 60° E., 216 lks. dist.)

A ponderosa pine, 26 ins. diam., bears N. 31° 30' W. 302 lks. dist., mkd. T35S R4W S25 BT. (Record N. 27° 30' W., 200 lks.)

At the cor. point

See an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone to brass cap mkd.

T35S	
R4W	R3W
S25	S30
S36	S31

1968

Deposit the original stone alongside the cor.

The cor. is located on nearly level land and on old fence line that bears N. and S. In scattered pine.

At the ½ sec. cor. of secs. 25 and 30, on the W. bdy. of the tp., mkd. with a sandstone, 12x10x5 ins., firmly set and plainly mkd. ½ on W. face.

from which

A ponderosa pine, 24 ins. diam., bears S. 30° E., 90 lks. dist., mkd. ½ S30 bt.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone to brass cap mkd.

T35S	
R4W	R3W
½	
S25	S30

1968

Deposit the original stone alongside the cor.

The cor. is located on nearly level land in scattered pine growth.

Remonumentation of Corners in T. 35 S., R. 3 W.

CHAINS

At the cor. of secs. 19, 24, 25 and 30, marked with a trachyte stone, 13x9x6 ins., firmly set and plainly mkd. with 4 notches on N. and 2 on S. edge:

from which

A ponderosa pine, 20 ins. diam., bears S. 34° W., 320 lks. dist., mkd. T35S R4W S25 BT. (Record S. 30° W., 325 lks. dist.)

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 12 ins. in the ground and in a mound of stone, 3½ ft. base to brass cap mkd.

T35S
R4W R3W

S24	S19
S25	S30

1968

Deposit the original stone alongside the cor.

from which

A ponderosa pine, 24 ins. diam., bears N. 55° W., 91 lks. dist., mkd. T35S R4W S24 BT.

The cor. is located on NW. slope of small draw that drains S. 30° W. on rolling land with scattered pine growth.

At the cor. secs. 5, 6, 31 and 32, on the N. bdy. of tp., marked with a sandstone, 15x10x6 ins., firmly set and plainly mkd. with 5 notches on E. and 1 on W. edge.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground and in a mound of stone 3½ ft. base to brass cap mkd.

T34S R3W

S31	S32
S6	S5

T35S R3W

1968

Deposit the original stone alongside the cor.

from which

A ponderosa pine, 16 ins. diam., N. 48° E., 95 lks. dist., mkd. T34S R3W S32 BT.

A ponderosa pine, 10 ins., S. 61° E., 24 lks. dist., mkd. T35S R3W S5 BT.

A ponderosa pine, 10 ins. diam., N. 79° W., 45 lks. dist., mkd. T34S R3W S31 BT.

Remonumentation of Corners in T. 35 S. R. 3 W.

CHAINS

The cor. is located on SE. slope of ridge that bears N. 25° E. and S. 25° W. In scattered pine growth.

At the cor. of secs. 29, 30, 31 and 32, marked with a granite stone, 13x8x6 ins., firmly set and plainly mkd. with 5 notches on E. and 1 on S. edge.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 15 ins. in the ground and in a mound of stone 3 ft. base to brass cap mkd.

T35S R3W

S30|S29
S31|S32

1968

Deposit the original stone alongside the cor.

The cor. is located on nearly level land in 4 strand fence on line that bears N. and S. 25 lks. E. of trail road that bears N. and S. In sagebrush growth, no timber.

At the ¼ Sec. cor. of secs. 29 and 30, marked with a sandstone, 15x13x6 ins., firmly set and plainly mkd. ¼ on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground and in a collar of stone to brass cap mkd.

T35S R3W

¼
S30|S29
1968

Deposit the original stone alongside the cor.

The cor. is located on nearly level land in 4 strand fence line that bears N. and S. 30 lks. E. of trail road that bears N. and S. In sagebrush growth, no timber.

At the cor. of secs. 19, 20, 29 and 30, marked with a sandstone, 13x8x6 ins., firmly set and plainly mkd. with 5 notches on the E. and 2 on the S. edge.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 15 ins. in the ground and in a mound of stone 2 ft. base to brass cap mkd.

T35S R3W

S19|S20
S30|S29

1968

Deposit the original stone alongside the cor.

Remonumentation of Corners in T. 35 S., R. 3 W.

CHAINS

The cor. is located on nearly level land in 4 strand fence line that bears N. and S. 183 lks. E. of trail road that bears N. and S. In sagebrush growth, no timber.

At the $\frac{1}{2}$ sec. cor. of secs. 19 and 20, marked with a sandstone, 9x7x6 ins., firmly set in a mound of stone, and plainly mkd. $\frac{1}{2}$ on W. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins. in the ground and in a collar of stone to brass cap mkd.

T35S R3W

$\frac{1}{2}$
S19|S20

1968

Deposit the original stone alongside the cor.

The cor. is located on nearly level land 4 lks. E. of 4 strand fence line that bears N. and S. 30 lks. E. of trail road that bears N. and S. In sagebrush growth, no timber.

T. 35 S., R. 4 W.

Township 35 South, Range 4 West, Salt Lake Meridian, is located within the Dixie National Forest. The subdivisational lines were surveyed by J. G. Burrill in 1876.

At the cor. of secs. 1, 2, 11 and 12, marked with a granite stone, 14x12x6 ins., firmly set and plainly mkd. with 5 notches on S. and 1 on N. edge.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins. in the ground and in a mound of stone $3\frac{1}{2}$ ft. base to brass cap mkd.

T35S R4W

S2|S1
S11|S12

1968

Deposit the original stone alongside the cor.

The cor. is located on nearly level benchland approx. 37.00 chs. dist. W. of dirt road that bears N. 45° E. and S. 45° W. In sagebrush growth, no timber.

T. 35 S., R. 6 W.

Remonumentation of Corners in T. 35 S., R. 6 W.

CHAINS

Township 35 South, Range 6 West, Salt Lake Meridian, is located partially within the Dixie National Forest. The subdivisional lines were surveyed by J. G. Burrill and T. C. Bailey in 1874.

At the cor. of secs. 10, 11, 14 and 15, marked with a sandstone, 16x12x8 ins., firmly set and plainly mkd. with 4 notches on the S. and 2 on the E. edge.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 15 ins. in the ground and in a mound of stone 3½ ft. base to brass cap mkd.

T35S R6W

S10	S11
S15	S14

1968

Deposit the original stone alongside the cor.

The cor. is located on NE. slope of hill in Forest Bdy. fence line that bears N. and S. approx. 8.00 chs. dist. S. of trail road that bears E. and W. In scattered pine growth.

At the cor. of secs. 2, 3, 10 and 11, marked with a volcanic stone, 24x12x12 ins., firmly set and plainly mkd. with 5 notches on S. and 2 on E. edge.

From which

A pinon, 10 ins. diam., bears N. 27° E., 126½ lks. dist., mkd. T35S R6W S2 BT. (Record N. 24° 30' E., 124 lks. dist.)

A pinon, 10 ins. diam., bears S. 8° E., 86 lks. dist., mkd. T35S R6W S11 BT. (Record S. 14° E., 85 lks. dist.)

A pinon, 15 ins. diam., bears N. 21° W., 162 lks. dist., mkd. T35S R6W S3 BT. (Record N. 25° 15' W., 118 lks. dist.)

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 14 ins. in the ground and in a mound of stone, 3½ ft. base to brass cap mkd.

T35S R6W

S3	S2
S10	S11

1968

Deposit the original stone in mound alongside the cor.

Remonumentation of Corners in T. 35 S., R. 6 W.

CHAINS

The cor. is located on gentle NE. slope of hill in 4 strand Forest Bdy. fence line that bears N. and S. In dense pinon growth.

At the cor. of secs. 7, 8, 17 and 18, marked with a sandstone, 20x12x8 ins., firmly set and plainly mkd. with 5 notches on the E. and 4 on the S. edge.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground and in a collar of stone to brass cap mkd.

T35S R6W

S7|S8
S18|S17

1968

Deposit the original stone alongside the cor.

The cor. is located on nearly level land at cor. of net wire fence line that bears S. and N. 21° E. 100 lks. dist. S. of wash, 50 lks. wide, 6 ft. deep, that drains east. Approx. 8 chs. S. of Little Valley road that bears E. and W. No timber.

T. 36 S., R. 6 W.

Township 36 South, Range 6 West, Salt Lake Meridian, is located partially within the Dixie National Forest. The subdivisional lines were surveyed by Alfred B. Lewis in 1897.

At the cor. of secs. 13, 14, 23 and 24, marked with a sandstone, 17x12x8 ins., firmly set and plainly mkd. with 3 notches on S. and 1 on E. edge.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 12 ins. in the ground and in a mound of stone 3½ ft. base to brass cap mkd.

T36S R6W

S14|S13
S23|S24

1968

Deposit the original stone in mound alongside the cor.

The cor. is located on top of bench 220 lks. dist. N. of Hatch Mountain Road that bears N. 70° W. and South. In lightly scattered pine growth.

Remonumentation of Corners in T. 36 S., R. 6 W.

CHAINS

At the $\frac{1}{4}$ sec. cor. of secs. 13 and 24, marked with a granite stone, 15x12x10 ins., firmly set and plainly mkd. $\frac{1}{4}$ on N. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins. in the ground and raise a mound of stone $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, to N. Brass cap mkd.

T36S R6W

$\frac{1}{4}$ $\frac{S13}{S24}$

1968

Deposit the original stone alongside the cor.

The cor. is located on N. slope of ridge that bears E. and W. approx. 6 chs. dist. N. of Hatch Mountain Road that bears E. and W. In sagebrush growth, no timber.

At the $\frac{1}{4}$ sec. cor. of secs. 14 and 23, marked with a sandstone, 14x12x7 ins., firmly set and plainly mkd. $\frac{1}{4}$ on N. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 12 ins. in the ground and in a mound of stone $3\frac{1}{2}$ ft. base to brass cap mkd.

T36S R6W

$\frac{1}{4}$ $\frac{S14}{S23}$

1968

Deposit the original stone in mound alongside the cor.

The cor. is located on top of ridge that bears N. 50° E. by S. 50° W. approx. 7 chs. dist. W. of Hatch Mountain Road that bears N. 50° E. and S. 50° W. In scattered pine growth.

T. 35 S., R. 7 W.

Township 35 South, Range 7 West, Salt Lake Meridian, is located within the Dixie National Forest. The sub-divisional lines were surveyed by Shadrach M. Richardson in 1884.

At the $\frac{1}{4}$ sec. cor. of secs. 28 and 33, marked with a lavastone, 24x14x10 ins., firmly set and plainly mkd. $\frac{1}{4}$ on N. face.

At the cor. point

Remonumentation of Corners in T. 35 S., R. 7 W.

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 18 ins. in the ground and in a collar of stone to brass cap mkd.

T35S R7W

$$\frac{1}{2} \begin{array}{r} S28 \\ S33 \end{array}$$

1968

Deposit the original stoneside the cor.

The cor. is located on NE. slope of bench 50 lks. dist. S. of small wash that drains E. approx, 12 chs. S. of trail road that bears E. and W. In sagebrush growth, no timber.

T. 36 S., R. 7 W.

Township 36 South, Range 7 West, Salt Lake Meridian, is located within the Dixie National Forest. The sub-divisional lines were surveyed by Shadrach M. Richardson in 1884.

At the cor. of secs. 3, 4, 9 and 10, marked with a volcanic stone, 16x14x8 ins., firmly set and plainly mkd. with 5 notches on S. and 3 on E. edge.

From which:

A ponderosa pine, 40 ins. in diam., bears N. 6° E., 61 lks. dist., mkd. T36S R7W S3 BT. (record, N. 10° E., 50 lks. dist.)

A ponderosa pine, 34 ins. in diam., bears S. 82° $30'$ E., $72\frac{1}{2}$ lks. dist., mkd. T36S R7W S10 BT. (Record, S. 70° E., 60 lks. dist.)

A ponderosa pine, 32 ins. in diam., bears S. 65° W., 133 lks. dist., mkd. T36S R7W S9 BT. (Record, S. 85° W., 90 lks. dist.)

A ponderosa pine, 34 ins. in diam., bears N. 40° W., $29\frac{1}{2}$ lks. dist., mkd. T36S R7W S4 BT. (Record, N. 35° W., 23 lks. dist.)

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 10 ins. in the ground and in a mound of stone $3\frac{1}{2}$ ft. base to brass cap mkd.

T36S R7W

$$\begin{array}{r} S4 | S3 \\ S9 | S10 \end{array}$$

1968

Deposit the original stone in mound alongside the cor.

Remonumentation of Corners in T. 36 S., R. 7 W.

CHAINS

The cor. is located on W. slope of hill approx. 7 chs. E. of trail road that bears S. 45° E. and N. 45° W. approx. 40 chs. S. of Panguitch Lake. In medium heavy pine growth.

At the $\frac{1}{2}$ sec. cor. of secs. 3 and 4, marked with a quartzite stone, 15x12x8 ins., firmly set and plainly mkd. $\frac{1}{2}$ on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. in diam., 24 ins. in the ground and raise a mound of stone 3 $\frac{1}{2}$ ft. base, 1 $\frac{1}{2}$ ft. high to W. Brass cap mkd.

T36SR7W

$\frac{1}{2}$
S4 | S3
1968

Deposit the original stone alongside the cor.

The cor. is located on NE. slope of ridge that bears E. and W. 165 lks. dist. S. of shoreline on Panguitch Lake that bears E. and W. approx. 10 chs. dist. N. of Hwy. 36 that bears E. and W. No timber.

At the cor. of secs. 29, 30, 31 and 32 marked with a sandstone, 30x12x8 ins., firmly set and plainly mkd. with 5 notches on E. and 1 on S. edge.

From which:

A pine, 20 ins. in diam., bears N. 13° E., 14 lks. dist., mkd. T36S R7W S29 BT. (Record, N. 7° E., 30 lks. dist.)

A pine, 30 ins. in diam., bears S. 81° E., 5 $\frac{1}{2}$ lks. dist., mkd. T36S R7W S32 BT. (Record, S. 75° E., 8 lks. dist.)

There is no remaining evidence of the other original bearing trees.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. in diam., 17 ins. in the ground and in a mound of stone 3 $\frac{1}{2}$ ft. base to brass cap mkd.

T36S R7W

S30 | S29
S31 | S32

1968

Deposit the original stone in mound alongside the cor.

Remonumentation of Corners in T. 36 S., R. 7 W.

CHAINS

At the $\frac{1}{4}$ sec. cor. of secs. 29 and 30, marked with a sandstone, 18x14x10 ins., firmly set and plainly mkd. $\frac{1}{2}$ on W. face.

There is no remaining evidence of the original bearing trees.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., on solid rock and in a mound of stone 4 ft. base to brass cap mkd.

T36S R7W

$\frac{1}{2}$
S30 | S29

1968

Deposit the original stone in mound alongside the cor.

from which

A ponderosa pine, 20 ins. in diam., N. 67° E., 90 lks. dist., mkd. T36S R7W S30 BT.

A ponderosa pine, 7 ins. in diam., N. 75° W., 16 lks. dist., mkd. T36S R7W S30 BT.

The cor. is located on top of small hill approx. 20 chs. dist. E. of junction of road in Dry Valley in scattered aspen and pine growth.

At the $\frac{1}{4}$ sec. cor. of secs. 5 and 8, which is established at a point N., 37 lks. dist. from an original bearing tree which is a ponderosa pine, 24 ins. in diam. mkd. $\frac{1}{4}$ S8 BT. There is no remaining evidence of the other original bearing tree or the original cor. stone.

At the cor. point, as established above.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins. in the ground and raise a mound of stone 3 ft. base, $1\frac{1}{2}$ ft. high to N. Brass cap mkd.

T36S R7W

$\frac{1}{2}$ — $\frac{S5}{S8}$

1968

from which

A ponderosa pine, 30 ins. in diam., N. 30° E., 130 lks. dist., mkd. $\frac{1}{4}$ S5 BT.

The cor. is located in center of Panguitch Lake Campground.

CHAINS

T. 36 S., R. 8 W.

Township 36 South, Range 8 West, Salt Lake Meridian, is located within the Dixie National Forest. The boundaries and subdivisional lines were surveyed by Jenkins and West in 1898. The W. bdy. was retraced by Mayhew H. Dalley in 1910.

At the $\frac{1}{2}$ sec. cor. of secs. 22 and 23, marked with a volcanic stone, 15x8x6 ins., firmly set and plainly mkd. $\frac{1}{2}$ on W. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 10 ins. in the ground and in a mound of stone $3\frac{1}{2}$ ft. base to brass cap mkd.

T36S R8W

$\frac{1}{2}$
S22|S23

1968

Deposit the original stone in mound alongside the cor.

The cor. is located in large grassy meadow, 331 lks. dist. E. of trail road that bears N. 35° W. and S. 35° E. No timber.

At the cor. of secs. 14, 15, 22 and 23, marked with a flintstone, 16x10x4 ins., firmly set and plainly mkd. with 3 notches on S. and 2 on E. edge.

from which

An aspen, 10 ins. in diam., bears S. 28° E., 28 lks. dist., mkd. T36S R8W S23 BT. (Record, S. 25° E., 50 lks. dist.)

An aspen, 11 ins. in diam., bears S. 45° W., 45 lks. dist., mkd. T36S R8W S22 BT.

An aspen, 12 ins. in diam., bears N. 57° W., 50 lks. dist., mkd. T36S R8W S15 BT. (Record, N. 57° W., 59 lks. dist.)

No remaining evidence of other bearing trees.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 20 ins. in the ground and in a collar of stone to brass cap mkd.

T36S R8W

S15|S14
S22|S23

1968

Deposit the original stone alongside the cor.

Remonumentation of Corners in T. 36 S., R. 8 W.

CHAINS

The cor. is located at N. end of large meadow 3 chs. dist. N. of canal, 50 lks. wide, 10 ft. deep, that drains E. In scattered aspen and pine growth.

At the cor. of secs. 21, 22, 27 and 28, marked with a volcanic stone, 18x7x7 ins., firmly set and plainly mkd. with 3 notches on E. and 2 on S. edge.

From which:

An aspen, 12 ins. in diam., bears N. 59° E., 19 lks. dist., mkd. T36S R8W S22 BT.

An aspen, 12 ins. in diam., bears S. 25° E., 36 lks. dist., mkd. T36S R8W S27 BT.

An aspen, 12 ins. in diam., bears S. 42° W., 32 lks. dist., mkd. T36S R8W S28 BT.

An aspen, 12 ins. in diam., bears N. 35° W., 23 lks. dist., mkd. T36S R8W S21 BT.

At the cor point

Set an iron post, 30 ins. long, 2½ ins. in diam., 15 ins. in the ground and in a mound of stone 3½ ft. base to brass cap mkd.

T36S R8W

S21 S22
S28 S27

1968

Deposit the original stone in mound alongside the cor.

The cor. is located on gentle SE. slope of hill approx. 8 chs. dist. N. of Cedar Breaks to Languitch Lake road that bears E. and W. In pine and aspen growth.

At the ¼ sec. cor. of secs. 28 and 29, marked with a volcanic stone, 12x7x6 ins., firmly set and plainly mkd. ¼ on W. face.

From which

An aspen, 12 ins. in diam., bears S. 37° 30' E., 128 lks. dist., mkd. ¼ S28 BT. (record, S. 38° E., 123 lks. dist.)

No remaining evidence of other bearing tree.

At the cor. point

Set an iron post, 30 ins. long., 2½ ins. in diam., 18 ins. in the ground and in a collar of stone to brass cap mkd.

Remonumentation of Corners in T. 36 S. R. 8 W.

CHAINS

T36S R8W

½

S29|S28

1968

Deposit the original stone alongside the cor.

From which:

A balsam, 10 ins. in diam., N. 51° 30' W., 74 lks. dist., mkd. ½ S29 BT.

The cor. is located on gentle E. slope of hill 2 chs. dist S. of Lowder Creek, 20 lks. wide, 2 ft. deep that flows S. 70° E. In dense pine and aspen growth.

At the cor. of secs. 29, 30, 31 and 32, marked with a volcanic stone, 15x6x6 ins., firmly set and plainly mkd. with 5 notches on E. and 1 on S. edge.

From which:

A spruce, (almost dead) 12 ins. in diam., bears N. 46° E., 251 lks. dist., mkd. T36S R8W S29 BT. (Record, N. 43° E., 250 lks. dist.)

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 14 ins. in the ground and in a mound of stone 3½ ft. base to brass cap mkd.

T36S R8W

S30|S29

S31|S32

1968

Deposit the original stone in mound alongside the cor.

The cor. is located on rolling meadow land 4 lks. E. of cor. of old fence that bears S. and W. approx. 4 chs. dist. E. of small creek that flows N. 45° E. In very scattered pine growth.

At the ½ sec. cor. of secs. 29 and 30, marked with a volcanic stone, 14x10x5 ins., firmly set and plainly mkd. ½ on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 10 ins. in the ground and in a mound of stone 5 ft. base to brass cap mkd.

T36S R8W

½

S30|S29

1968

Deposit the original stone in mound alongside the cor.

Remonumentation of Corners in T. 36 S., R. 8 W.

CHAINS

The cor. is located on rolling meadow land, 75 lks. N. of Cedar Breaks to Panguitch Lake road that bears E. and W. No timber.

At the cor. of secs. 19x 20, 29 and 30, marked with a volcanic stone, 12x8x5 ins., firmly set and plainly mkd. with 5 notches on E. and 2 on S. edge.

From which:

An aspen, 12 ins. in diam., bears N. 37° 30' E., 31 lks. dist., mkd. T36S R8W S20 BT. (Record, N. 42° E., 27 lks. dist.)

An aspen, 10 ins. in diam., bears S. 41° 30' E. 62 lks. dist., mkd. T36S R8W S29 BT. (Record, S. 41° E., 64 lks. dist.)

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 15 ins. in the ground and in a mound of stone 3 ft. base to brass cap mkd.

T36S R8W

S19	S20
S30	S29

1968

Deposit the original stone in mound alongside the cor.

From which:

A balsam, 10 ins. in diam., bears S. 77° W., 51 lks. dist., mkd. T36S R8W S30 BT.

A balsam, 18 ins. in diam., bears N. 8° 30' W., 30 lks. dist., mkd. T36S R8W S19 BT.

The cor. is located on N. slope of small draw that drains E. In dense aspen and pine growth.

At the ½ sec. cor. of secs. 30 and 31, marked with a volcanic stone, 16x8x6 ins., firmly set and plainly mkd. ½ on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 16 ins. in the ground and in a mound of stone 3 ft. base to brass cap mkd.

T36S R8W

½	S30
	S31

1968

Remonumentation of Corners in T. 36 S., R. 8 W.

CHAINS

Deposit the original stone alongside the cor.

The cor. is located on grassy meadows land 8 lks. N. of fence line that bears E. and W. A new cabin bears S. 86° W., approx. 15 chs. dist. A small lake in meadow bears S. 68° E., about 20 chs. dist. No timber.

T. 36 S., R. 9 W.

Township 36 South, Range 9 West, Salt Lake Meridian, is located within the Dixie National Forest. The boundaries and subdivisional lines were surveyed by Jenkins and West in 1897. The E. bdy. was retraced by Mayhew H. Dalley in 1910.

At the $\frac{1}{2}$ sec. cor. of sec. 24, on the E. bdy. of Tp., marked with a volcanic stone, 18x12x5 ins., firmly set and plainly mkd. $\frac{1}{2}$ on W. face.

From which:

A balsam, 20 ins. in diam., bears S. 61° E., 45 lks. dist., mkd. by an old scar at base of tree: scribe marks are gone over, not remarked. (Record, S. 63° 30' E., 45 lks. dist.)

A balsam, 16 ins. in diam., bears N. 13° W., 40 lks. dist., mkd. $\frac{1}{2}$ S24 BT. (Record, N. 14° W., 40 lks. dist.)

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. in diam., 8 ins. in the ground and in a mound of stone 3 $\frac{1}{2}$ ft. base to brass cap mkd.

T36S
R9W R8W
 $\frac{1}{2}$
S24

1968

Deposit the original stone in mound alongside the cor.

The cor. is located on SE. slope of hill 75 lks. S. of Cedar Breaks to Panguitch Lake road that bears E. and W. In dense pine and aspen growth.

At the cor. of secs. 13, 14, 23 and 24, marked with a volcanic stone, 20x13x6 ins., firmly set and plainly mkd. with 3 notches on S. and 1 on E. edge.

From which

Re monumentation of Corners in T. 36 S., R. 9 W.

CHAIN

A balsam, 14 ins. in diam., bears N. 42° E., 63 lks. dist., mkd. T36S R9W S13 BT. (record. N. 42° E., 63 lks. dist.)

A spruce, 22 ins. in diam., bears S. 77° 15' E., 53 lks. dist., mkd. T36S R9W S24 BT. (record. S. 77° 15' E., 53 lks. dist.)

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground and in a collar of stone to brass cap mkd.

T36S R9W

S14 | S13
S23 | S24

1968

Deposit the original stone alongside the cor.

The cor. is located in meadow land on net wire fence line that bears E. and W. approx. 7 chs. E. of draw that drains N. 45° E. In scattered pine and aspen growth.

T. 36 S., R. 15 W.

Township 36 South, Range 15 West, Salt Lake Meridian, is located partially within the Dixie National Forest. Surveyed by A.J. Stewart Jr. in 1874 and retraced by Frank T. Roberts in 1909.

At the cor. of secs. 27, 28, 33 and 34, marked with a granite stone, 24x14x12 ins., firmly set and plainly mkd. with 3 notches on E. and 1 on S. edge.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 8 ins. in the ground and in a mound of stone 3½ ft. base to brass cap mkd.

T36S R15W

S28 | S27
S33 | S34

1968

Deposit the original stone in mound alongside the cor.

From which:

A cedar, 8 ins. in diam., bears S. 26° E., 69 lks. dist. mkd. T36S R15W S34 BT.

Remonumentation of Corners in T. 36 . . . 1 . .

CHAINS

The cor. is located on S. slope of spur projecting E. approx. 4 chs. dist. N. of trail road that bears E. and W. In scattered cedar growth.

T. 36 S., R. 16 W.

Township 36 South, Range 16 West, Salt Lake Meridian, is located partially on the border of the Dixie National Forest. The E. bdy. was surveyed by T.C. Bailey in 1881 and the subdivisional lines by Mayhew H. Dalley in 1899.

At the $\frac{1}{4}$ sec. cor. of sec. 25, marked with a sandstone, 16x15x12 ins., firmly set and plainly mkd. $\frac{1}{4}$ on W. face witnessed by a mound of stone 3 ft. base to brass cap mkd.

T36S
R16W R15W
 $\frac{1}{4}$
S25 |
1968

Deposit the original stone in a mound alongside the cor.

The cor. is located on bench land in 4 strand Forest Bdy. fence line that bears N. and S. In sagebrush growth.

T. 36 S., R. 18 W.

Township 36 South, Range 18 West, Salt Lake Meridian, is located partially within the Dixie National Forest. The S. bdy. was surveyed by T.C. Bailey in 1881 and the subdivisional lines by Gentry and Heist in 1911.

At the cor. of secs. 4, 5, 32 and 33, on the S. bdy. of Tp., marked with a granite stone, 20x12x6 ins., firmly set and plainly mkd. with 4 notches on E. and 2 on W. side.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 10 ins in the ground and in a mound of stone $3\frac{1}{2}$ ft. base to brass cap mkd.

T36S R18W

S32 | S33
S5 | S4
T37S R18W

1968

Remonumentation of Corners in T. 36 S., R. 18 W.

CHAINS

Deposit the original stone in mound alongside the cor.

From which

A cedar, 12 ins. in diam., bears S. 22° E., 101 lks. dist., mkd. T37S R18W S4 BT.

The cor. is located on NW. slope of spur projecting S. 50° W., at the cor. of 4 strand fence (Forest Bdy.) line that bears E., W. and N. approx. 10 chs. dist. E. of trail road that bears N. and S. In scattered cedar growth.

At the township cor. of Tps. 36 and 37, S., Rs. 18 and 19 W., marked by a mound of stone, which has been used by local and county surveyors. This also fits very close with the original notes. The corner was also confirmed by a Mr. Terry, owner of the Terry Ranch. This cor. is a control point for his land (NE Quadrant). The original cor. was a pudding stone, very soft and easily broken.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 12 ins. in the ground and in a mound of stone 3½ ft. base to brass cap mkd.

T36S
R19W R18W

S36	S31
S1	S6
T37S	
1968	

From which

A cedar, 14 ins. in diam., bears S. 45° E., 74½ lks. dist., mkd. T37S R18W S6 BT.

A pinon, 10 ins. in diam., bears N. 25° W., 59 lks. dist., mkd. T. 36 S R19W S36 BT.

Forest Bdy. fence cor. bears N. 45° E., 10 lks. dist., projecting N. and E.

The cor. is located on NE slope of spur, projecting E. about 7 chs. dist. W. of large wash, 1 ch. wide, 20 ft. deep that drains N. 45° E. approx. 5 chs. dist. N. of State Highway 120 that bears E. and W. In scattered pinon and cedar growth.

At the ¼ sec. cor. of secs. 31 and 32, marked with a la a stone, 20x12x6 ins., firmly set and plainly mkd. ¼ on W. face.

354

Remonumentation of Corners in T. 36 S. R. 18 W.

CHAINS R

At the $\frac{1}{2}$ sec. cor. of secs. 31 and 32, marked with a
 la a stone, 20x12x6 ins., firmly set and plainly mkd.
 $\frac{1}{2}$ on W. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 10
 ins. in the ground, and in a mound of stone $3\frac{1}{2}$ ft. base
 to brass cap mkd.

T36S R18W

$$\frac{1}{2}$$

S31	S32
-----	-----

1968

Deposit the original stone in mound alongside
 the cor.

From which

A cedar, 10 ins. in diam., bears N. 76° E., 27
 lks. dist., mkd. $\frac{1}{2}$ S32 BT. This tree is also the
 cor. of 4 strand fence line that bears N. and E.

The cor. is located on E. slope of spur projecting S.
 in scattered cedar growth.

At the cor. of secs. 29, 30, 31 and 32, marked with a
 granite stone, 20x12x8 ins., firmly set and plainly
 mkd. with 5 notches on E. and 1 on S. edge.

There is no remaining evidence of the original bearing
 trees.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 10
 ins. in the ground and in a mound of stone $3\frac{1}{2}$ ft. base
 to brass cap mkd.

T36S R18W

S30	S29
S31	S32

1968

Deposit the original stone in mound alongside
 the cor.

From which

A cedar, 12 ins. in diam., bears S. 36° 30' W., 53
 lks. dist., mkd. T36S R18W S31 BT.

The cor. is located on N. slope of rolling foothills
 approx. 8 chs. dist. S. of trail road in draw that
 drains S. 70° W. in scattered cedar growth.

Re monumentation of Corners in T. 37 S., R. 7 W.

CHAINS

T. 37 S., R. 7 W.

Township 37 South, Range 7 West, Salt Lake Meridian, is located within the Dixie National Forest. Surveyed by R. E. L. Collier in 1895.

At the $\frac{1}{2}$ sec. cor. of secs. 32 and 33, marked with a conglomerate stone, 18x12x8 ins., firmly set in a mound of stone, and dimly mkd. $\frac{1}{2}$ on W. face.

From which

A ponderosa pine, 30 ins. in diam., bears N. 36° E., 72 lks. dist., mkd. $\frac{1}{2}$ S33 BT. (Record, N. 20° E., 70 lks. dist.)

A ponderosa pine, 32 ins. in diam., bears N. 27° 40' W., 129 lks. dist., mkd. $\frac{1}{2}$ S32 BT. (Record, N. 65° W., 125 lks. dist.)

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. in diam., 24 ins. in the ground and raise a mound of stone 3 ft. base, 1 $\frac{1}{2}$ ft. high to W. Brass cap mkd.

T37S R7W

 $\frac{1}{2}$

S32|S33

1968

Deposit the original stone alongside the cor.

The cor. is located in small draw that drains S. In pine and aspen growth.

T. 37 S., R. 13 W.

Township 37 South, Range 13 West, Salt Lake Meridian, is located partially within the Dixie National Forest. The subdivisional lines were surveyed by A.J. Stewart Jr. in 1873.

At the $\frac{1}{2}$ sec. cor. of secs. 5 and 6, marked with a granite stone, 16x12x6 ins., (record 16x8x4 ins.) firmly set and plainly mkd. $\frac{1}{2}$ on W. face.

From which

A pinion pine, 12 ins. in diam., bears S. 21° E., 58 lks. dist., mkd. $\frac{1}{2}$ S5 BT. (Record, S. 35° E., 60 lks. dist.)

A pinion pine, 10 ins. in diam., bears S. 66° W., 105 lks. dist., mkd. $\frac{1}{2}$ S6 BT. (Record, S. 65° W., 115 lks. dist.)

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. in diam., 10 ins. in the ground and in a mound of stone 3 $\frac{1}{2}$ ft. base' to brass cap mkd.

CHAINS

T37S R13W

$$\frac{1}{2}$$
 S6|S5

1968

Deposit the original stone in mound alongside the cor.

The cor. is located on top of rocky spur, projecting E. 8 chs. dist. S. of State Hwy 56 that bears NE. and SW. at the cor. fo 4 strand Forest Bdy. fence line that bears E., W. and S. In scattered cedar, pinion and oakbrush.

T. 37 S., R. 14 W.

Township 37 South, Range 14 West, Salt Lake Meridian, is located partially within the Dixie National Forest. The subdivisional lines were surveyed by A.J. Stewart Jr. in 1873.

At the cor. of secs. 2, 3, 10 and 11, marked with a sandstone, 16x12x4 ins., firmly set and plainly mkd. with 5 nothces on S. and 2 on E. edge.

From which

A pinion pine, 12 ins. in diam., bears N. 34° E., 68 lks. dist., mkd. T37S R14W S2 BT. (Record, N. 46° E., 82 lks. dist.)

A cedar, 12 ins. in diam., bears N. 39° W., 87 lks. dist., mkd. T37 S R14W S3 BT. (Record, N. 45° W., 42 lks. dist.)

No remaining evidence of the other two bearing trees.

At the cor. point

Set an iron post, 30 ins. long 2½ ins. in diam., 6 ins. in the ground and in a mound of stone 3½ ft. base to brass cap mkd.

T37S R14W

$$\frac{S3|S2}{S10|S11}$$

1968

Deposit the original stone in mound alongside the cor.

From which

A pinion pine, 14 ins. in diam., bears S. 47° W., 92 lks. dist., mkd. T37S R14W S10 BT.

The cor. is located on E. slope of spur projecting N. 130 lks. dist. W. of small draw that drains N. In scattered cedar, pinion and oakbrush.

Remonumentation of Corners in T. 37 S., R. 14 W.

CHAINS

At the cor. of secs. 3, 4, 9 and 10, marked with a marblestone, 16x10x6 ins., firmly set and plainly mkd. with 5 notches on S. and 3 on E. edge.

from which

A pinon pine, 6 ins. in diam., bears N. 65° E.; 8½ lks. dist., mkd. T37S R14W S3 BT. (Record N. 60° E., 10 lks. dist.)

A pinon pine, 9 ins. in diam., bears S. 37° 30' W., 24 lks. dist. (Record, S. 30° W., 24 lks. dist.)

A pinon pine, 8 ins. in diam., bears N. 44° W., 54 lks. dist., mkd. T37S R14W S4 BT. (Record N. 45° W., 56 lks. dist.)

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 8 ins. in the ground and in a mound of stone 3½ ft. base to brass cap mkd.

T37S R14W

S4	S3
S9	S10

1968

Deposit the original stone in mound alongside the cor.

The cor. is located on rocky N. slope of hill in scattered cedar, pinon and oakbrush.

At the cor. of secs. 4, 5, 8 and 9, marked with a limestone, 15x6x6 ins., (record 15x6x4 ins.) firmly set and plainly mkd. with 5 notches on S. and 4 on E. edge.

from which

A pinon pine, 16 ins. in diam., bears S. 47° E., 24 lks. dist., mkd. T37S R14W S9 BT. (Record S. 45° E., 24 lks. dist.)

A cedar, 10 ins. in diam., bears S. 32° W., 29 lks. dist., mkd. T37S R14W S8 BT. (Record S. 35° W., 30 lks. dist.)

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground and raise a mound of stone 3 ft. base, 1½ ft. high to W. Brass cap mkd.

T37S R14W

S5	S4
S8	S9

1968

Deposit the original stone alongside the cor.

Remonumentation of Corners in T. 37 S., R. 14 W.

CHAINS

The cor. is located in sandy, rolling foothills 59 lks. dist. S. of old Iron Town road that bears E. and W. In scattered cedar and pinon growth.

At the $\frac{1}{2}$ sec. cor. of secs. 4 and 5, marked with a sandstone, 17x8x6 ins. (record 18x8x6 ins.), firmly set and plainly mkd. $\frac{1}{2}$ on W. face.

from which

A pinon pine, 14 ins. in diam., bears S. $81^{\circ} 30'$ E., 15 lks. dist., mkd. $\frac{1}{2}$ S4 BT. (Record E. 13 lks. dist.)

A cedar, 14 ins. in diam., bears N. 70° W., 42 lks. dist., mkd. $\frac{1}{2}$ S5 BT. (Record N. 85° W., 45 lks. dist.)

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 14 ins. in the gound and in a mound of stone $3\frac{1}{2}$ ft. base to brass cap mkd.

T37S R14W

$\frac{1}{2}$
S5 | S4
1968

Deposit the original stone in mound alongside the cor.

The cor. is located on E. slope of spur projecting S. In scattered cedar, pinon and oakbrush.

T. 37 S., R. 15 W.

Township 37 South, Range 15 West, Salt Lake Meridian, is located within the Dixie National Forest. The South bdy was surveyed by T. C. Bailey in 1881.

At the cor. of sections 34 and 35, on the S. bdy. of Tp., marked with a sandstone, 20x15x10 ins., firmly set and plainly mkd. with 4 notches on W. and 2 on E. edge.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 8 ins. in the gound and in a mound of stone $3\frac{1}{2}$ ft. base to brass cap mkd.

T37S R15W

S34 | S35
S2

T38S R15W

1968

Deposit the original stone in mound alongside the cor.

from which

A pinon pine, 10 ins. in diam., bears S. 70° W.,

Remonumentation of Corners in T. 37 S., R. 15 W.

CHAINS

49 lks. dist., mkd. T38S R15W BT.

The cor. is located on W. of small hill approx. 8 chs. dist. E. of Pinto Creek that drains N. In scattered cedar growth.

At the cor. of sections 33 and 34 marked with a sandstone, 14x9x4 ins., firmly set and plainly mkd. with 3 notches on the E. and W. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 14 ins. in the ground and in a mound of stone 3½ ft. base cap mkd.

T37S R15W

S33|S34

S3

T38S R15W

1968

Deposit the original stone in mound alongside the cor.

From which

A cedar, 14 ins. in diam., bears S. 9° W., 88 lks. dist., mkd. T38S R15W BT.

The cor. is located on steep N. slope of hill approx. 20 chs. dist. S. of improved dirt road that bears E. and W. in 4 strand fence line that bears N. and S. In scattered cedar, pinon and oakbrush.

T. 37 S., R. 16 W.

Township 37 South, Range 16 West, Salt Lake Meridian, is located partially within the Dixie National Forest. The township was surveyed by T.C. Bailey in 1881, retraced and resurveyed by Gentry and Heist in 1911.

At the ¼ sec. cor. of secs. 35 and 36, marked with a granite stone, 19x15x4 ins., firmly set and plainly mkd. ¼ on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 8 ins. in the ground and in a mound of stone 3½ ft. base to brass cap mkd.

T37S R16W

¼

S35|S36

1968

Deposit the original in mound alongside the cor.

Remonumentation of Corners in T. 37 S., R. 16 W.

CHAINS

The cor. is located in nearly level sagebrush flat about 6 chs. dist. N. of wash, 1 ch. wide, 2 ft. deep, that drains N. 45° W. No timber.

At the cor. of secs. 10, 11, 14 and 15, marked with a sandstone, 16x12x8 ins., firmly set and plainly mkd. with 4 notches on S. and 2 on E. edge.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 10 ins. in the ground and in a mound of stone 3½ ft. base to brass cap mkd.

T37S R16W

S10	S11
S15	S14

1968

Deposit the original stone in mound alongside the corner.

From which

A cedar, 7 ins. in diam., bears N. 71° E., 34 lks. dist., mkd. T37S R16W S11 BT.

A cedar, 12 ins. in diam., bears S. 9° W., 61½ lks. dist., mkd. T37S R16W S15 BT.

The cor. is located on NW. slope of hill approx. 10 chs. dist. S. of draw that drains W. In scattered cedar growth.

At the ¼ sec. cor. of secs. 10 and 15, marked with a granite stone, 18x16x12 ins., firmly set in a mound of stone, and plainly mkd. ¼ on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 10 ins. in the ground and in a mound of stone 3½ ft. base to brass cap mkd.

T37S R16W

¼	S10	
	S15	S14

1968

Deposit the original stone in mound alongside the corner.

The cor. is located on E. slope of draw, 250 lks. dist., that drains N. In scattered cedar and pinon growth.

Remonumentation of Corners in T. 37 S., R. 16 W.

CHAINS

At the $\frac{1}{2}$ sec. cor. of secs. 8 and 9, marked with a granite stone, 18x14x10 ins., firmly set and plainly mkd. $\frac{1}{2}$ on W. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 9 ins. in the ground and in a mound of stone $3\frac{1}{2}$ ft. base to brass cap mkd.

T37S R16W

$\frac{1}{2}$
S8|S9

1968

Deposit the original stone in mound alongside the cor.

From which

A cedar, 8 ins. in diam., bears S. $70^{\circ} 30'$ W., 44 lks. dist., mkd. $\frac{1}{2}$ S8BT.

The cor. is located in rolling foothills 2 lks. dist. S. of 4 strand Forest Bdy. fence line that bears E. and W. 1 ch. dist. N. of wash, 10 lks. wide, 1 ft. deep, that drains N. 40° W. In scattered cedar growth.

T. 37 S., R. 18 W.

Township 37 South, Range 18 West, Salt Lake Meridian, is located partially within the Dixie National Forest. The township was surveyed by T.C. Bailey in 1881.

At the cor. of secs. 1, 2, 11 and 12, marked with a sandstone, 25x15x12 ins., firmly set and plainly mkd. with 5 notches on S. and 1 on E. edge.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins. in the ground and raise a mound of stone 3 ft. base, $1\frac{1}{2}$ ft. high to W. Brass cap mkd.

T37S R18W

S2|S1
S11|S12

1968

Deposit the original stone alongside the cor.

From which

A cedar, 10 ins. in diam., bears S. 52° E., $21\frac{1}{2}$ lks. dist. mkd. T37S R18W S12 BT

A cedar, 11 ins. in diam., bears N. 82° W., 54 lks dist., mkd. T37S R18W S2 BT.

Remonumentation of Corners in T. 37 S. . 1 W.

CHAINS

The cor. is located in rolling foothills, 4 lks. dist. E. of 4 strand fence, line that bears N. and S. 1 ch. dist. W. of trail road that bears N. 45° W. and S. 45° E. In scattered cedar growth.

At the $\frac{1}{2}$ sec. cor. of secs. 1 and 2, marked with a sandstone, 30x15x12 ins., firmly set and plainly mkd. $\frac{1}{4}$ on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. in diam., 24 ins. in the ground and raise a mound of stone 3 $\frac{1}{2}$ ft. base, 1 $\frac{1}{2}$ ft. high to W. Brass cap mkd.

T37S R18W

$\frac{1}{4}$
S2|S1

1968

Deposit the original stone alongside the cor.

From which'

A cedar, 10 ins. in diam., bears N. 46° E., 8 $\frac{1}{2}$ lks. dist., mkd. $\frac{1}{4}$ S. bt.

A cedar, 10 ins. in diam., bears S. 87° W., 26 $\frac{1}{2}$ lks. dist., mkd. $\frac{1}{4}$ S2 BT.

The cor. is located on E. slope of draw that drains S. 50° E. in 4 strand fence line that bears E. and W. In scattered cedar growth.

At the cor. of secs. 2, 3, 10 and 11, marked with a trachyte stone, 20x12x8 ins ins. firmly set and plainly mkd. with 5 notches on S. and 2 on E. edge.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. in diam., 8 ins. in the ground and in a mound of stone 3 $\frac{1}{2}$ ft. base to brass cap mkd.

T37S R18W

S3|S2
S10|S11

1968

Deposit the original stone alongside the cor.

From which

A cedar, 10 ins. in diam., bears S. 60° E., 12 $\frac{1}{2}$ lks. dist., mkd. T37S R18W S11 BT.

A cedar, 10 ins. in diam., bears S. 51° W., 62 lks. dist., mkd. T37S R18W S10 BT.

Remonumentation of Corners in T. 37 S., R. 18 W.

CHAINS

The cor. is located on top of rolling bench land 2 chs. dist. W. of small draw that drains S. In scattered cedar and pinion growth.

At the $\frac{1}{2}$ sec. cor. of secs. 2 and 11, marked with a granite stone, 15x10x4 ins., firmly set and plainly mkd. $\frac{1}{2}$ on W. face.

At the cor. point

Set an iron post, 30 ins. long $2\frac{1}{2}$ ins. in diam. 14 ins. in the ground and in a mound of stone $3\frac{1}{2}$ ft. base to brass cap mkd.

T37S R18W

$\frac{1}{2}$ $\frac{S2}{S11}$

1968

Deposit the original stone in mound alongside the cor.

From which

A cedar, 10 ins. in diam., bears S. 58° W., 29 lks dist., mkd. $\frac{1}{2}$ S11 BT.

A cedar, 10 ins. in diam., bears N. 15° W., 32 lks. dist., mkd. $\frac{1}{2}$ S2 BT.

The cor. is located on E. slope of small draw that drains S. 20° W. In scattered pine and cedar growth.

At the cor. of secs. 4, 5, 8 and 9, marked with a granite stone, 25x15x12 ins., firmly set and plainly mkd. with 5 notches on S. and 4 on E. edge.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 12 ins. in the ground and in a mound of stone $3\frac{1}{2}$ ft. base to brass cap mkd.

T37S R18W

$\frac{S5}{S8}$ | $\frac{S4}{S9}$

1968

Deposit the original stone in mound alongside the cor.

From which

A pinion pine, 12 ins. in diam., bears S. 27° E., 58 lks. dist., mkd. T37S R18W S9 BT.

CHAINS

...station on Chain T. 37 S., R. 10 W.

A pinion pine, 7 ins. in diam., bears S. 62° W., 10 lks. dist., mkd. T37S R18W S8 BT.

The cor. is located on W. slope of spur projecting S. 15° E., 91 lks. dist. E. of cor. of 4 strand fence line that bears N., S. and W. In scattered cedar and pinion growth.

T. 38 S., R. 9 W.

Township 38 South, Range 9 West, Salt Lake Meridian, is located partially within the Dixie National Forest. The township was surveyed by William Lewman in 1893.

At the $\frac{1}{2}$ sec. cor. of sec. 3, marked with a sandstone, 20x15x10 ins., firmly set and plainly mkd. $\frac{1}{2}$ on N. face.

From which

A red pine, 20 ins. in diam., bears S. 29° E., 25 lks. dist., mkd. $\frac{1}{2}$ S3 BT. (Record S. 59° E., 39 lks dist.)

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. in diam., 16 ins in the ground and in a mound of stone 3 $\frac{1}{2}$ ft. base to brass cap mkd.

T37S R9W

$\frac{1}{2}$ ———
S3

T38S R9W

1968

Deposit the original in mound alongside the cor.

The cor. is located on SW. slope of hill, 10 lks. dist. N. of old fence line that bears E. and W. In dense pine growth.

At the cor. of secs. 2, 3, 10 and 11, marked with a lava stone, 20x10x10 ins., firmly set and plainly mkd. with 5 notches on S. and 2 on E. edge.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. in diam., 10 ins. in the ground and in a mound of stone 3 $\frac{1}{2}$ ft. base to brass cap mkd.

T38S R9W

S3|S2
S10|S11

1968

Deposit the original stone in mound alongside the cor.

From which

Remonumentation of Corners in T. 38 S., R. 9 W.

CHAINS

A red pine, 18 ins. in diam., bears N. 45° E.,
20½ lks. dist., mkd. T38S R9W S2 BT.

A red pine, 15 ins. in diam., bears S. 70° E., 49½
lks. dist., mkd. T38S R9W S11 BT.

The cor. is located on NW. slope of lava flow approx.
8 chs. dist. S. of cor. of pole fence that bears N. and
W. In dense pine and aspen growth.

At the ¼ sec. cor. of secs. 2 and 3, marked with a sand-
stone, 20x12x8 ins., firmly set and plainly mkd. ¼ on W.
face.

No remaining evidence of the original bearing
trees.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 12
ins. in the ground and in a mound of stone 3½ ft. base
to brass cap mkd.

T38S R9W

¼
S3|S2

1968

Deposit the original stone in mound alongside
the cor.

The cor. is located on steep S. slope of hill, 5 lks.
dist. W. of net wire fence line that bears N. and S.
4 chs. dist. N. of trail road that bears E. and W. In
aspen and pine growth.

T. 38 S., R. 14 W.

Township 38 South, Range 14 West, Salt Lake Meridian,
is located within the Dixie National Forest. The town-
ship was surveyed by T. C. Bailey in 1881.

At the cor. of secs. 29, 30, 31 and 32, marked with a
sandstone, 26x12x6 ins., firmly set and plainly mkd.
with 5 notches on E. and 1 on S. edge.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 10
ins. in the ground and in a mound of stone 3½ ft. base
to brass cap mkd.

T38S R14W

S30|S29
S31|S32

1968

Deposit the original stone in mound alongside
the cor.

366
300

Remonumentation of Corners in T. 38 S., R. 14 W.

CHAINS

The cor. is located on E. slope of small hill surrounded by meadowland in Grass Valley 9 lks. dist. N. and 34 lks. dist E. of cor. of fence that bears E., W. and N. In scattered cedar and pinon growth.

At the $\frac{1}{2}$ sec. cor. of secs. 29 and 30, marked with a sandstone, 17x14x8 ins., firmly set and plainly mkd. $\frac{1}{2}$ on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. in diam., 20 ins. in the ground and in a mound of stone 3 ft. base to brass cap mkd.

T38S R14W

$\frac{1}{2}$
S30 | S29

1968

Deposit the original stone alongside the cor.

From which

A cedar, 14 ins. in diam., bears N. 85° 20' W., 267 lks. dist., mkd. $\frac{1}{2}$ S30 BT.

The cor. is located at the cor. of fence line that bears east and south 35 lks. dist. S. of trail road that bears E. and W. In scattered cedar growth.

At the $\frac{1}{2}$ sec. cor. of secs. 30 and 31, marked with a granite stone, 14x10x5 ins., firmly set in a mound of stone and plainly mkd. $\frac{1}{2}$ on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. in diam., 14 ins. in the ground and in a mound of stone 3 $\frac{1}{2}$ ft. base to brass cap mkd.

T38S R14W

$\frac{1}{2}$ — S30
S31

1968

Deposit the original stone in mound alongside the cor.

The cor. is located on W. slope of small rise, in re-seeded area approx. 3/4 of a mile E. of main road in Grass Valley. No timber.

T. 39 S., R. 6 W.

Township 39 South, Range 6 West, Salt Lake Meridian, is located partially within the Dixie National Forest. The township was surveyed by Shadrach M. Richardson in 1884.

Remonumentation of Corners in T. 39 S., R. 6 W.

CHAINS

At the cor. of secs. 8, 9, 16 and 17, marked with a sandstone, 16x16x6 ins., firmly set and plainly mkd. with 4 notches on S. and 4 on E. edge.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 18 ins. in the ground and in a collar of stone to brass cap mkd.

T39S R6W

S8	S9
S17	S16

1968

Deposit the original stone alongside the cor.

The cor. is located on NE. slope of hill 30 lks. dist. W. of 4 strand fence line that bears N. and S. about 4 chs. dist. S. of logging road that bears E. and W. approx. 12 chs. dist. W. of Hwy. 89 at the Alton Junction. In scattered pine growth.

T. 40 S., R. 13 W.

Township 40 South, Range 13 West, Salt Lake Meridian, is located partially within the Dixie National Forest. The subdivisional lines were surveyed by Harvey D. Heist in 1902.

At the closing cor. of secs. 30 and 31, on the W. bdy. of tp., marked with a sandstone, 30x12x6 ins., firmly set and plainly mkd. with 5 notches on N. and 1 on S. edge. CC on E. face.
from which

The cor. of secs. 25 and 36, T. 40 S., R. 14 W., a 2½ in. I.P., herein-after described.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 14 ins. in the ground and in a mound of stone 4 ft. base to brass cap mkd.

T40S	
R14W	R13W
S36	S30
S31	CC

1968

Deposit the original stone in mound alongside the cor.

from which

A cedar, 10 ins. in diam., bears S. 67° E., 80½ lks. dist., mkd. T40S R13W S31 BT.

The cor. is located on E. slope of small draw, 110 lks. dist. E., that drains S. Land very broken and ledgy with scattered cedar and oakbrush.

Remonumentation of Corners in T. 40 S., R. 13 W.

CHAINS

At the cor. of secs. 14, 15, 22 and 23, marked with a trachyte stone, 20x15x6 ins., firmly set and plainly mkd. with 3 notches on S. and 2 on E. edge.

from which

A cedar, 9 ins. in diam., bears S. 66° 30' E.
43½ lks. dist., mkd. T40S R13W S23 BT. (Record
S. 38° E., 40 lks. dist.)

A cedar, 8 ins. in diam., bears S. 47° 20' W.,
70½ lks. dist., mkd. T40S R13W S22 BT. (Record
S. 79° W., 68 lks. dist.)

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 16
ins. in the ground and in a mound of stone 3 ft. base
to brass cap mkd.

T40S R13W	
S15	S14
S22	S23

1968

Deposit the original stone in mound alongside
the cor.

The cor. is located on S. slope of hill in scattered
cedar, pinon and oakbrush.

At the ¼ sec. cor. of secs. 14 and 15, marked with a
sandstone, 15x10x4 ins., firmly set and in a small
mound of stone and dimly mkd. ¼ on W. face.

from which

A pinon, 12 ins. in diam., bears S. 61° 30' E.,
29 lks. dist., remarked ¼ S14 BT. (Record, S. 64°
E., 28 lks. dist.)

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 15 ins.
in the ground and in a mound of stone 3½ ft. base to
brass cap mkd.

T40S R13W	
¼	
S15	S14

1968

Deposit the original stone in a mound alongside
the cor.

Remonumentation of Corners in T. 40 S., R. 13 W.

CHAINS

From which

A telephone pole, 12 ins. in diam., bears S. 53° 20' W., 18½ lks. dist., mkd. B0 This 12 strand telephone line bears S. 26° 30' W. and N. 26° 30' E.

The cor. is located in bottom of small draw that drains S. In cedar, pinion and oakbrush.

At the cor. of secs. 10, 11, 14 and 15, marked with a trachyte stone, 30x12x10 ins., firmly set and plainly mkd. with 4 notches on S. and 2 on E. edge.

From which

A cedar, 7 ins. in diam., bears S. 67° 30' W. 21 lks. dist., mkd. T40S R13W S15 BT.

At the cor point

Set an iron post, 30 ins. long, 2½ ins. in diam., 15 ins. in the ground and in a mound of stone 3½ ft. base to brass cap mkd.

T40S R13W

S10	S11
S15	S14

1968

Deposit the original stone in mound alongside the cor.

From which

A cedar, 6 ins. in diam., bears S. 70° E., 44½ lks. dist., mkd. T40S R13W S14 BT.

A cedar, 7 ins. in diam., bears N. 24° W., 43½ lks. dist., mkd. T40S R13W S10 BT.

The cor. is located on SE. slope of 12 lks. dist. W. of net wire fence line that bears N. 15° E. and S. 15° W., 220 lks. dist. W. of U.S. Hwy. 91 which bears N. 15° E. and S. 15° W. In cedar, pinion and oakbrush.

At the cor. of secs. 3 and 10, marked with a trachyte stone, 24x14x10 ins., firmly set and plainly mkd. with 5 notches on S. and 2 on E. edge.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 12 ins. in the ground and in a mound of stone 3½ ft. base to brass cap mkd.

T40S R13W

S3	S11
S10	

1968

Remonumentation of Corners in T. 40 S., R. 13 W.

CHAINS

Deposit the original stone in mound alongside
The cor.

From which

A cedar, 6 ins. in diam., bears N. 72° 30' E.,
20 lks. dist., mkd. with a blaze.

A cedar, 7 ins. in diam., bears S. 62° 20' E.,
39 lks. dist., mkd. with a blaze.

A cedar, 5 ins. in diam., bears S. 70° W., 45½
lks. dist., mkd. T40S R13W S10 BT.

The cor. is located in rolling foothills. In cedar,
pinion and oakbrush.

At the closing cor. of secs. 2 and 11, marked with a
trachyte stone, 20x10x5 ins., firmly set
and plainly mkd. with 5 notches on S. and 2 on E. edge.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 12 ins.
in the ground and in a mound of stone 3½ ft. base to
brass cap mkd.

T40S R13W

S3	S2	CC
	S11	
1968		

Deposit the original stone in mound alongside the
cor.

The cor. is located on S. slope of small spur projecting
E. 125 lks. dist. N. of draw that drains E. at the S.
edge of large rock, 15x15x6 ft. above ground. In
scattered cedar, pinion and oakbrush.

At the ½ sec. cor. of secs. 21 and 22, marked with a
trachyte stone, 28x15x10 ins., firmly set and plainly
mkd. ½ on W. face.

From which

A cedar, 8 ins. in diam., bears S. 26° E., 20 lks.
dist., dimly mkd. almost dead.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 8 ins.
in the ground and in a mound of stone 3½ ft. base to
brass cap mkd.

T40S R13W

S21	S22
-----	-----

1968

Re monumentation of Corners in T. 40 S., R. 13 W.

CHAINS

Deposit the original stone in mound alongside the cor.

From which

A cedar, 7 ins. in diam., bears S. 70° E., 44½ lks. dist., mkd. ¼ S22 BT.

A cedar, 10 ins. in diam., bears N. 24° W., 43½ lks. dist., mkd. ¼ S21 BT.

The cor. is located on rolling foothills 4 lks. dist. E. of Forest Bdy. of fence line that bears N. and S. In cedar, pinion and oakbrush.

At the cor. of secs. 15, 16, 21 and 22, marked with a trachyte stone, 36x20x15 ins., firmly set and plainly mkd. with 3 notches on S. and 3 on E. edge.

From which

A cedar, 11 ins. in diam., bears N. 7° E., 102½ lks. dist., mkd. T40S R13W S22 BT. (Record, N. 13° 30' E., 105 lks. dist.)

A cedar, 6 ins. in diam., bears S. 78° E., 85 lks. dist., mkd. T40S R13W S22 BT. (Record, S. 86° E., 46 lks. dist.)

No remaining evidence of the other bearing trees.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 8 ins. in the ground and in a mound of stone 4 ft. base to brass cap mkd.

T40S R13W

S16	S15
S21	S22

1968

Deposit the original stone in mound alongside the cor.

From which

A cedar, 8 ins. in diam., bears S. 83° W., 71½ lks. dist., mkd. T40S R13W S21 BT.

A cedar, 5 ins. in diam., bears N. 11° W., 105 lks. dist., mkd. T40S R13W S16 BT.

The cor. is located on S. slope of small draw that drains E. 5 lks. dist. N. of cor. of 4 strand Forest Bdy. fence line bearing east and south. In scattered cedar, pinion and oakbrush.

Remonumentation of Corners in T. 40 S. R. 13 W.

CHAINS

At the 1/2 sec. cor. of secs. 10 and 15, marked with a trachyte stone, 24x15x8 ins., firmly set and plainly mkd. with 1/2 on N. face.

From which:

A pinion pine, 10 ins. in diam., bears S. 36° E., 56 lks. dist., mkd. 1/2 S15 BT. (Record, S. 39° E., 56 lks. dist.)

A cedar, 4 ins. in diam., bears N. 81° W., 10 lks. dist., mkd. 1/2 S10 BT. (Record, N. 89° W., 10 lks. Dist.)

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. in diam., 8 ins in the ground and in a mound of stone 3 1/2 ft. base to brass cap mkd.

T40S R13W

1/2 S10 / S15

1968

Deposit the original stone in mound alongside the cor.

The cor. is located on SE. slope of small hill in scattered cedar, pinion and oakbrush.

At the 1/2 sec. cor. of secs. 28 and 29, marked with a sandstone, 18x12x8 ins., firmly set and plainly mkd. 1/2 on W. face.

From which

A pinion pine, 14 ins. in diam., bears S. 61° E., 47 lks. dist., mkd. 1/2 S28 BT. (Record, S. 65° E., 48 lks. dist.)

A pinion pine, 12 ins. in diam., bears S. 4° 30' W., 186 lks. dist., mkd. 1/2 S29 BT. (Record, S. 3° W., 184 lks. dist.)

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. in diam., 20 ins. in the ground and in a collar of stone to brass cap mkd.

T40S R13W

1/2 S29 | S28

1968

Deposit the original stone alongside the cor.

The cor. is located on SE. slope of rolling sandy foot-hills at the cor. of old fence line projecting N. and W. In scattered cedar and pinion growth.

Remonumentation of Corners in T. 40 S., R. 13 W.

CHAINS

At the cor. of secs. 20, 21, 28 and 29, marked with a sandstone, 28x10x8 ins., firmly set and plainly mkd. with 2 notches on S. and 4 on E. edge.

A cedar, 8 ins. in diam., bears S. 42° E., 12 lks. dist., mkd. T40S R13W S28 BT. (Record S. 14° E., 9 lks. dist.)

A cedar, 12 ins. in diam., bears N. 52° W., 13½ lks. dist., mkd. T40S R13W S20 BT. (Record N. 89° W., 15 lks. dist.)

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 16 ins. in the ground and in a mound of stone 3½ ft. base to brass cap mkd.

T40S R13W

S20	S21
S29	S28

1968

Deposit the original stone in mound alongside the cor.

The cor. is located on W. slope of spur projecting S. 125 lks. dist. E. of wash that drains S. 25° E. 2 chs. dist. W. of top of spur, 6 lks. S. and 4 lks. dist. E. of cor. of fence projecting E. and S. In scattered cedar, pinion and oakbrush.

At the ¼ sec. cor. of secs. 21 and 28, marked with a trachyte stone, 16x8x4 ins., firmly set and plainly mkd. ¼ on N. face.

From which

A cedar, 10 ins. in diam., bears S. 22° W., 172 lks. dist., mkd. ¼ S20 BT. (Record S. 4° W., 121 lks. dist.)

A cedar, 9 ins. in diam., bears N. 54° W., 119 lks. dist., mkd. ¼ S21 BT. (Record N. 24° W., 174 lks. dist.)

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 10 ins. in the ground and in a mound of stone 3½ ft. base to brass cap mkd.

T40S R13W

¼	S21
	S28

1968

Remonumentation of Corners in T. 40 S. R. 13 W.

CHAINS

Deposit the original stone in mound alongside the cor.

The cor. is located on SE. slope of spur 6 lks. dist. S. of Forest Bdy. fence line that bears E. and W. in scattered cedar and oakbrush.

At the cor. of secs. 29, 30, 31 and 32, marked with a sandstone, 35x15x12 ins., (record 18x10x8 ins.) firmly set and plainly mkd. with 5 notches on E. and 1 on S. edge.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 8 ins. in the ground and in a mound of stone 3½ ft. base to brass cap mkd.

T40S R13W	
S30	S29
S31	S32

1968

Deposit the original stone in mound alongside the cor.

From which

A cedar, 6 ins. in diam., N. 16° W., 12½ lks. dist., mkd. T40S R13W S30 BT.

The cor. is located on ledges facing W. 40 ft. above bottom of draw that drains S. 5° E. In scattered cedar growth.

At the ¼ sec. cor. of secs. 29 and 32, marked with a sandstone, 18x12x8 ins., firmly set and plainly mkd. ¼ on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 14 ins. in the ground and in a mound of stone 3½ ft. base to brass cap mkd.

T40S R13W

¼	S29
	S32

1968

Deposit the original stone in mound alongside the cor.

From which

A cedar, 7 ins. in diam., S. 62° E., 55½ lks. dist., mkd. ¼ S32 BT.

Remonumentation of Corners in T. 40 S., R. 13 W.

CHAINS

A cedar, 5 ins. in diam., bears N. 43° 30' W.,
68½ lks. dist., mkd. ½ S29 BT.

The cor. is located on E. slope of spur projecting S.
In scattered cedar, pinon and oakbrush.

T. 40 S., R. 14 W.

Township 40 South, Range 14 West, Salt Lake Meridian, is
located within the Dixie National Forest. The
Eighth Standard Parallel South at the S. bdy. of Tp.,
was surveyed by T. C. Bailey and J. G. Burrill in
1877. The subdivisional lines were surveyed by Harvey
D. Heist in 1902.

At the standard cor. of secs. 3, 4, 33 and 34, on the
S. bdy. of Tp., marked with a sandstone, 20x15x8 ins.,
(record, 18x12x8 ins.) firmly set and plainly mkd.
with 3 notches on E. and 3 on W. edge, SC. on N. face.

from which

A pinon pine, 8 ins. in diam., bears N. 70° E.,
92 lks. dist., mkd. T40S R14 W S34 BT.

A cedar, 10 ins. in diam., bears N. 6° W., 59 lks.
dist., mkd. T40S R14W S33 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 10
ins. in the ground and in a mound of stone, 3½ ft. base
to brass cap mkd.

SC
T40S R14W

S33	S34
S4	S3

T41S R14W

1968

Deposit the original stone in mound alongside
the cor.

The cor. is located on S. slope of large wash 2 chs.
dist. S. of dirt road that bears E. and W. In
scattered cedar, pinon and oakbrush.

At the cor. of secs. 25 and 36, on the E. bdy. of Tp.,
marked with a sandstone, 18x8x4 ins., firmly
set and plainly mkd. with 5 notches on N. and 1 on
S. edge.

from which

The closing cor. of secs. 30 and 31, T. 40 S.,
R. 13 W., herein-before described, bears S. 62
lks. dist.

At the cor. point

Remonumentation of Corners in T. 40 S. R. 14 W.

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 12 ins. in the ground and in a mound of stone $3\frac{1}{2}$ ft. base to brass cap mkd.

T40S
R14W R13W

$\frac{S25}{S36}$ | S30

1968

Deposit the original stone in mound alongside the cor.

The cor. is located on E. slope of small draw, 1 ch. dist. E., that drains S. approx. 5 chs. dist. N. of canyon that drains S. 60° E. Land very broken, in scattered cedar and oakbrush.

At the cor. of secs. 22, 23, 26 and 27, marked with a sandstone, $36 \times 14 \times 12$ ins., (record, $30 \times 12 \times 10$ ins.) firmly set and plainly mkd. with 2 notches on S. and 2 on E. edge.

from which

55 A pinon pine, 5 ins. in diam., bears S. 6° E., 55 lks. dist., mkd. T40S R14W S26 BT. (Record, S. 5° E., 61 lks. dist.)

A cedar, 12 ins. in diam., bears S. 76° W., 42 lks. dist., mkd. T40S R14W S27 BT. (Record, S. 82° W., 42 lks. dist.)

A cedar, 11 ins. in diam., bears N. 75° W., 37 lks. dist., mkd. T40S R14W S22 BT. (Record, N. 71° W., 78 lks. dist.)

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 14 ins. in the ground and in a mound of stone $3\frac{1}{2}$ ft. base to brass cap mkd.

T40S R14W
 $\frac{S22}{S27}$ | $\frac{S23}{S26}$

1968

Deposit the original stone in mound alongside the cor.

The cor. is located on steep S. slope of hill above Leeds Creek approx. 11 chs. dist. N. of dirt road in canyon that bears E. and W. 3 chs. dist. S. of top of ridge that bears E. and W. In cedar, pinon and oakbrush.

Remonumentation of Corners in T. 41 S., R. 15 W.

CHAINS

T. 41 S., R. 15 W.

Township 41 South, Range 15 West, Salt Lake Meridian, is located partially within the Dixie National Forest. The subdivisional lines were surveyed by J.G. Burrill in 1877.

At the cor. of secs. 8, 9, 16 and 17, marked with a trachyte stone, 14x11x6 ins., firmly set and plainly mkd. with 4 notches on S. and 4 on E. edge.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 6 ins. in the ground and in a mound of stone 4 ft. base to brass cap mkd.

T41S R15W

$$\begin{array}{r} \underline{S8|S9} \\ S17|S16 \end{array}$$

1968

Deposit the original stone in mound alongside the cor.

From which

East Peak of Twin Peaks, bears S. 62° E., approx. 350 lks. dist.

West Peak of Twin Peaks, bears S. 81° 30' W., approx. 750 lks. dist.

The cor. is located on N. slope of head of draw that drains N. 20° W., 5 lks. dist. N. of 4 strand fence line that bears E. and W. In scattered cedar growth.

At the ¼ sec. cor. of secs. 9 and 16, marked with a trachyte stone, 10x9x6 ins., firmly set and plainly mkd. ¼ on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 20 ins. in the ground and in a collar of stone. Raise a mound of stone 3½ ft. base, 1½ ft. high to N. Brass cap mkd.

T41S R15W

$$\begin{array}{r} \circ \\ \underline{\frac{1}{4} \text{---} S9} \\ S16 \end{array}$$

1968

Deposit the original stone alongside the cor.

From which

CHAINS

Re-survey of 41 B. 15 11.

A cedar, 8 ins. in diam., bears S. 31° E., 60 lks. dist., mkd. $\frac{1}{2}$ S16 BT.

A cedar, 8 ins. in diam., bears N. 27° W., 55 lks. dist., mkd. $\frac{1}{2}$ S9 BT.

The cor. is located on NE. slope of hill, 20 lks. dist. N. of 4 strand fence line that bears E. and W. In dense cedar and pinion growth.

At the cor. of secs. 9 and 16, marked with a trachyte stone, 10x9x6 ins., firmly set and plainly mkd. with 4 notches on S. and 3 on E. edge.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. in diam., 10 ins. in the ground and in a mound of stone 3 $\frac{1}{2}$ ft. base to brass cap mkd.

T41S R15W

$$\frac{S9}{S16} | S10$$

1968

Deposit the original stone in mound alongside the cor.

The cor. is located on gentle S. slope of hill in - 4 strand Forest Bdy. fence line that bears E. and W.

In scattered cedar growth.

At the $\frac{1}{2}$ sec. cor. of secs. 8 and 17, marked with a trachyte stone, 11x10x6 ins., firmly set and plainly mkd. with $\frac{1}{2}$ on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. in diam., 14 ins. in the ground and in a mound of stone 3 $\frac{1}{2}$ ft. base to brass cap mkd.

T41S R15W

$$\frac{1}{2} \frac{S8}{S17}$$

1968

Deposit the original stone in mound alongside the cor.

From which

A cedar, 6 ins. in diam., bears S. 28° W., 29 lks. dist., mkd. $\frac{1}{2}$ S17 BT.

A cedar, 10 ins. in diam., bears N. 13° E., 49 lks. dist., mkd. $\frac{1}{2}$ S8 BT.

The cor. is located on NE. slope of rocky hill 1 lk. S. of 4 strand fence line that bears E. and W. In scattered cedar growth.

CERTIFICATE OF SURVEY

I, Ferrel D. Reynolds, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 15th day of February, 1961,

I have remonumented corners in Tps. 33 S., Rs. 2, 3 and 6 W.; Tps. 35 S., Rs. 4, 6 and 7 W.; Tps. 36 S., Rs. 6, 7, 8, 9, 15, 16 and 18 W.; Tps. 37 S., Rs. 13, 14, 15, 16 and 18 W.; Tps. 38 S., Rs. 9 and 14 W.; T. 39 S., R. 6 W.; T. 40 S., Rs. 13 and 14 W. and T. 41 S., R. 15 W.

of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

May 1, 1969 (Date)

Ferrel D. Reynolds SURVEYING TECHNICIAN

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

OCT 27 1969

BUREAU OF LAND MANAGEMENT, Washington, D. C.

The foregoing field notes of the remonumentation of corners in Tps. 33 S., Rs. 2, 3, 6 W.; Tps. 35 S., Rs. 3, 4, 6 and 7 W.; Tps. 36 S., Rs. 6, 7, 8, 9, 15, 16 and 18 W.; Tps. 37 S., Rs. 7, 13, 14, 15, 16 and 18 W.; Tps. 38 S., Rs. 9 and 14 W.; T. 39 S., R. 6 W.; Tps. 40 S., Rs. 13 and 14 W. and T. 41 S., R. 15 W., Salt Meridian, Utah

executed by Ferrel D. Reynolds, Surveying Technician having been critically examined and found correct, are hereby approved.

AUG 31 1971 (Date)

Mark F. Lumm Chief, Division of Cadastral Survey

CERTIFICATE OF TRANSCRIPT

I CERTIFY That the foregoing transcript of the field notes of the above described surveys in is a true copy of the original field notes.

(Date)

(Chief, Division of Engineering)

Blank

Page

Blank

Page

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
ORIGINAL

CACHE NATIONAL FOREST

R587

383

FIELD NOTES

OF THE

REMONUMENTATION OF CORNERS

IN

TOWNSHIP 5 NORTH, RANGE 1 WEST

TOWNSHIP 8 NORTH, RANGE 1 WEST

TOWNSHIP 9 NORTH, RANGE 1 WEST

TOWNSHIP 10 NORTH, RANGE 1 WEST

TOWNSHIP 12 NORTH, RANGE 2 WEST

TOWNSHIP 10 NORTH, RANGE 3 EAST

TOWNSHIP 11 NORTH, RANGE 1 EAST

TOWNSHIP 11 NORTH, RANGE 3 EAST

TOWNSHIP 11 NORTH, RANGE 4 EAST

TOWNSHIP 11 NORTH, RANGE 5 EAST

TOWNSHIP 12 NORTH, RANGE 4 EAST

TOWNSHIP 13 NORTH, RANGE 1 EAST

TOWNSHIP 13 NORTH, RANGE 4 EAST

TOWNSHIP 14 NORTH, RANGE 2 EAST

TOWNSHIP 14 NORTH, RANGE 3 EAST

TOWNSHIP 14 NORTH, RANGE 4 EAST

TOWNSHIP 14 NORTH, RANGE 5 EAST

Of the SALT LAKE Meridian,

In the State of UTAH

EXECUTED BY

FERREL D. REYNOLDS

SURVEYING TECHNICIAN

Under special instructions dated FEBRUARY 15, 19 61, which provided for the surveys included under Group Number 447, UTAH, approved FEBRUARY 16, 1961, and assignment instructions dated MAY 26, 19 69.

Survey commenced JULY 16, 19 68

Survey completed AUGUST 21, 19 68


INDEX DIAGRAM

Township _____, Range _____,

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

CORNER REMONUMENTATION INDEX DIAGRAM

Township 5 NORTH , Range 1 WEST , SALT LAKE Meridian

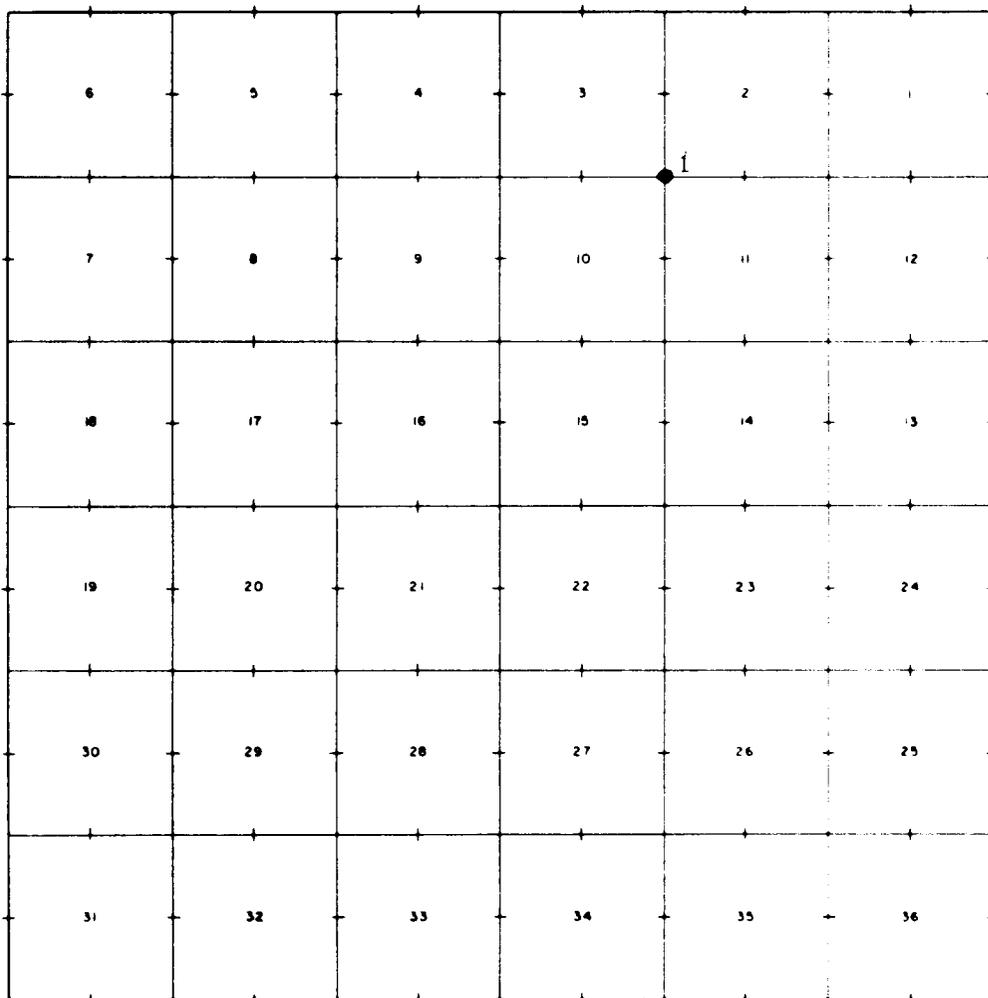


Blank

Page

CORNER REMONUMENTATION

INDEX DIAGRAM

Township 8 NORTH , Range 1 WEST , SALT LAKE Meridian

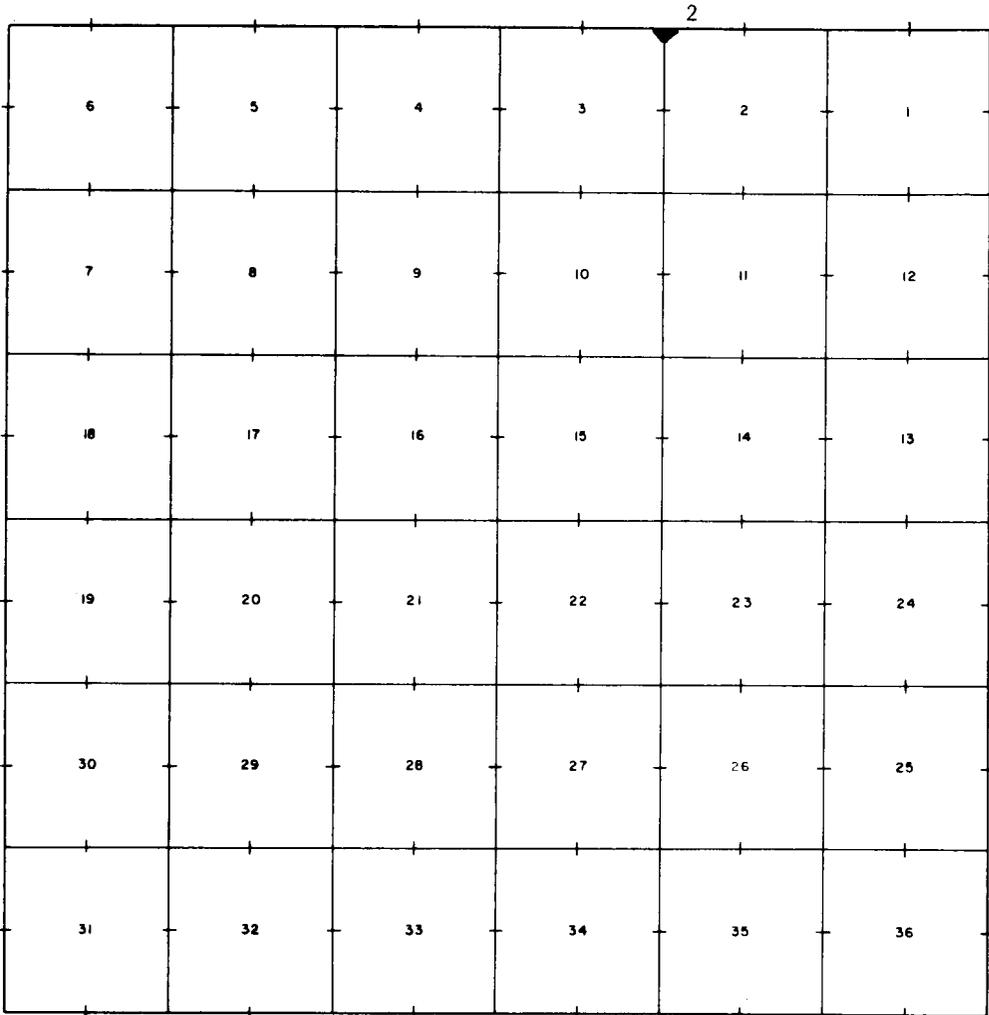


Blank

Page

CORNER REMONUMENTATION

INDEX DIAGRAM

Township 9 NORTH Range 1 WEST SALT LAKE Meridian

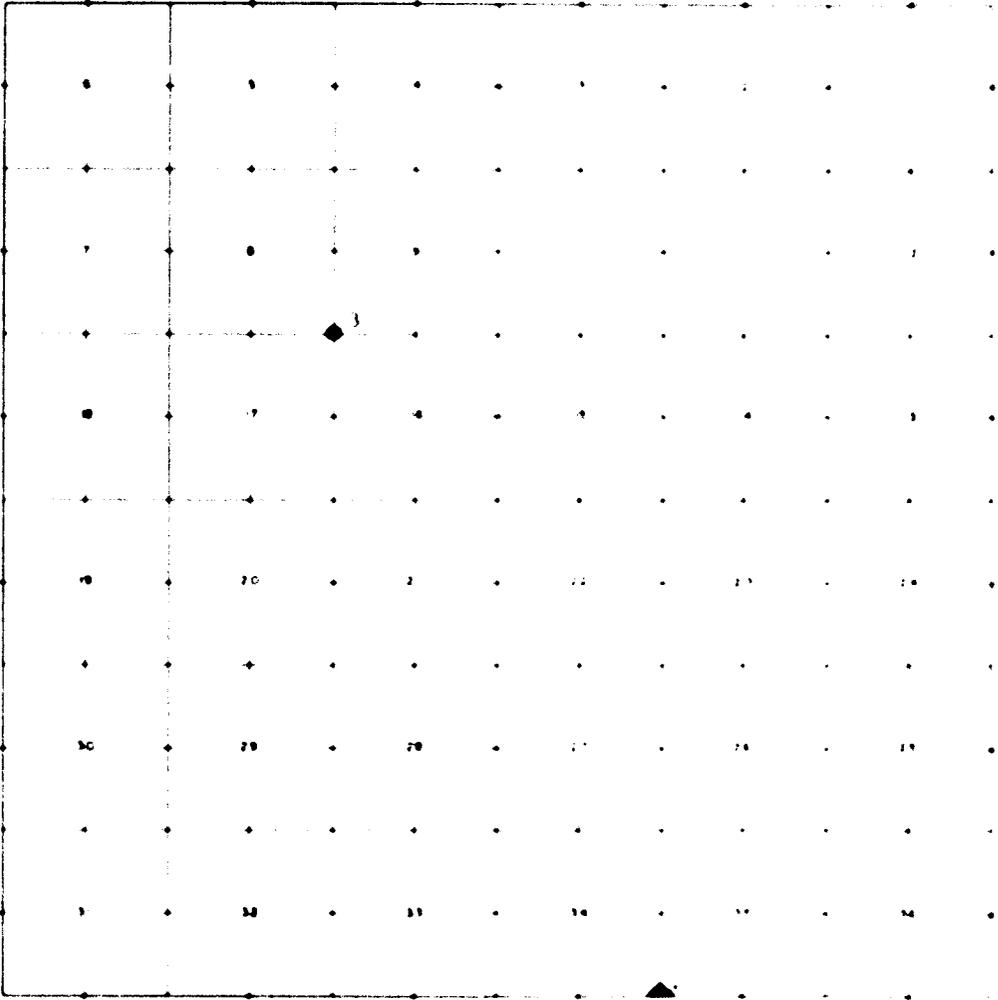


Blank

Page

CORNER REMONUMENTATION

INDEX DIAGRAM

Township 10 NORTH , Range 1 WEST , SALT LAKE Meridian

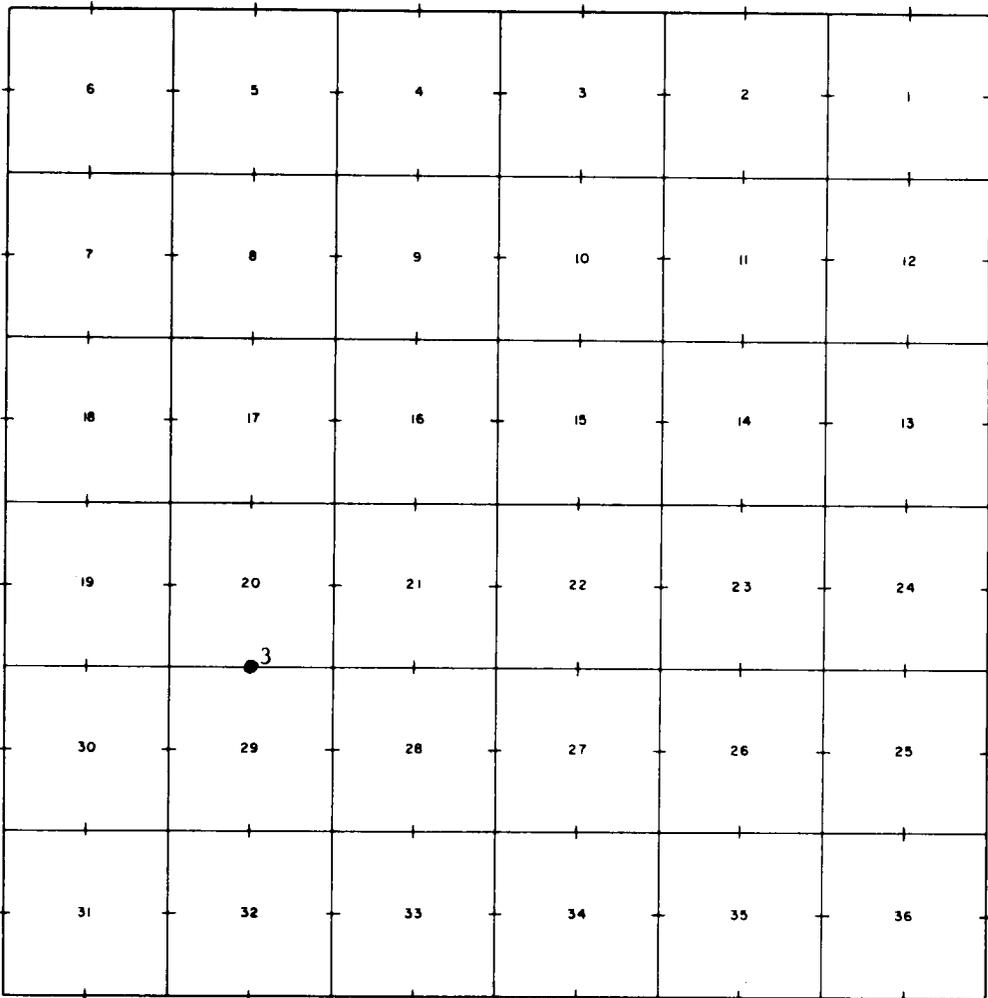


Blank

Page

CORNER REMONUMENTATION

INDEX DIAGRAM

Township 12 NORTH , Range 2 WEST , SALT LAKE Meridian

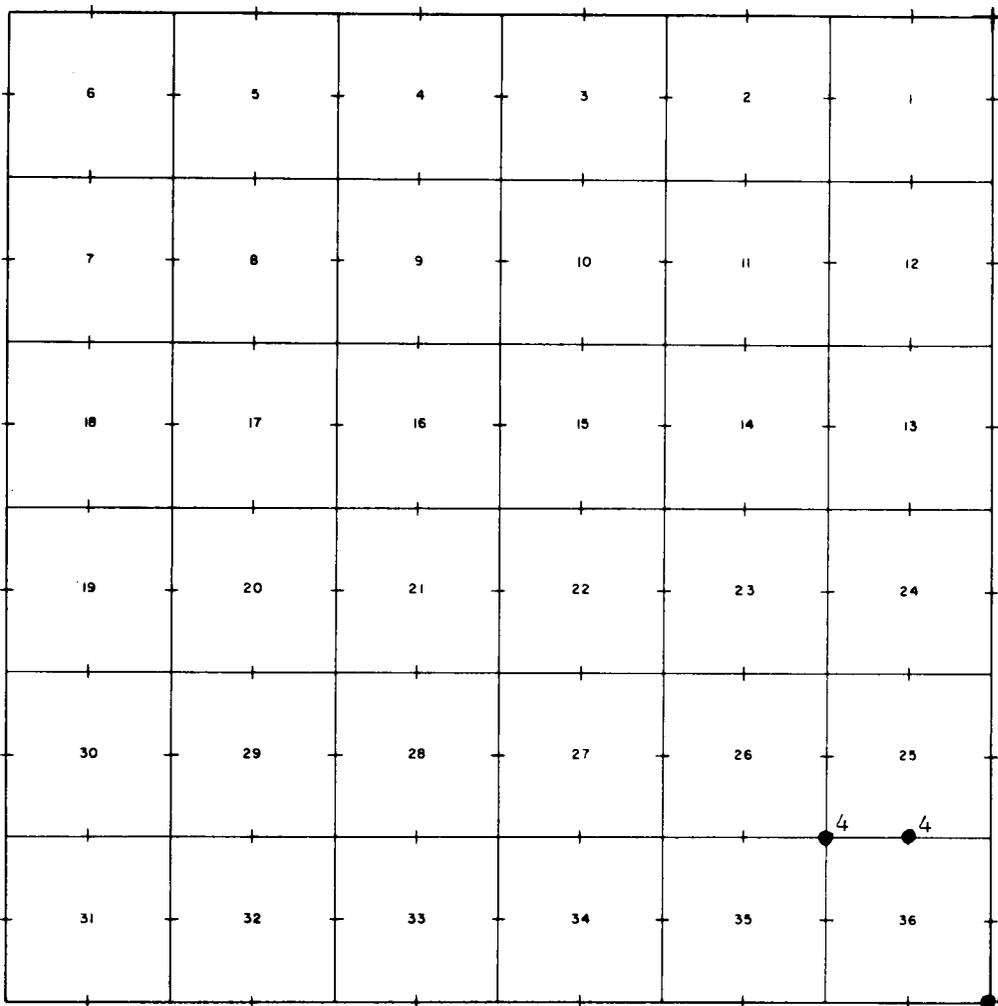


Blank

Page

CORNER REMONUMENTATION INDEX DIAGRAM

Township 10 NORTH , Range 3 EAST , SALT LAKE Meridian

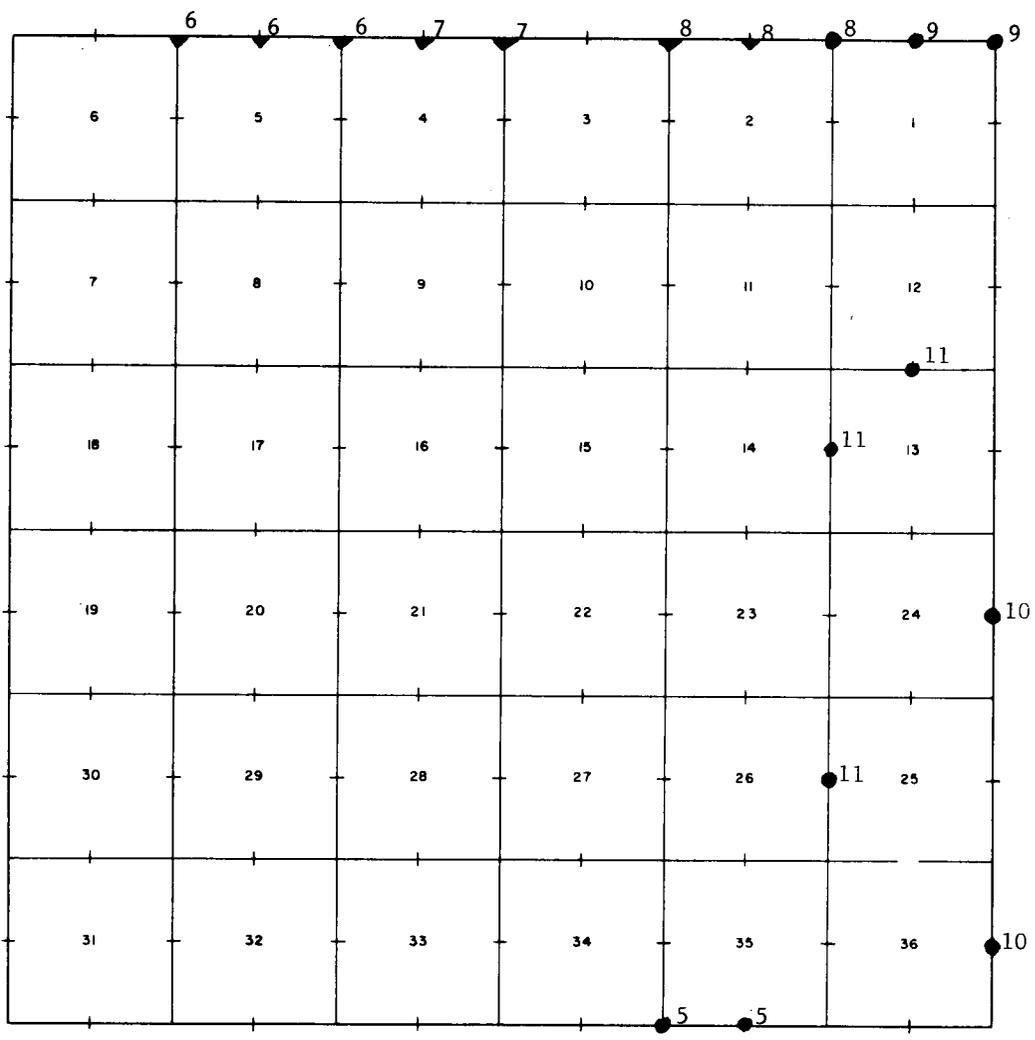


Blank

Page

CORNER REMONUMENTATION

INDEX DIAGRAM

Township 11 NORTH , Range 1 EAST , SALT LAKE Meridian

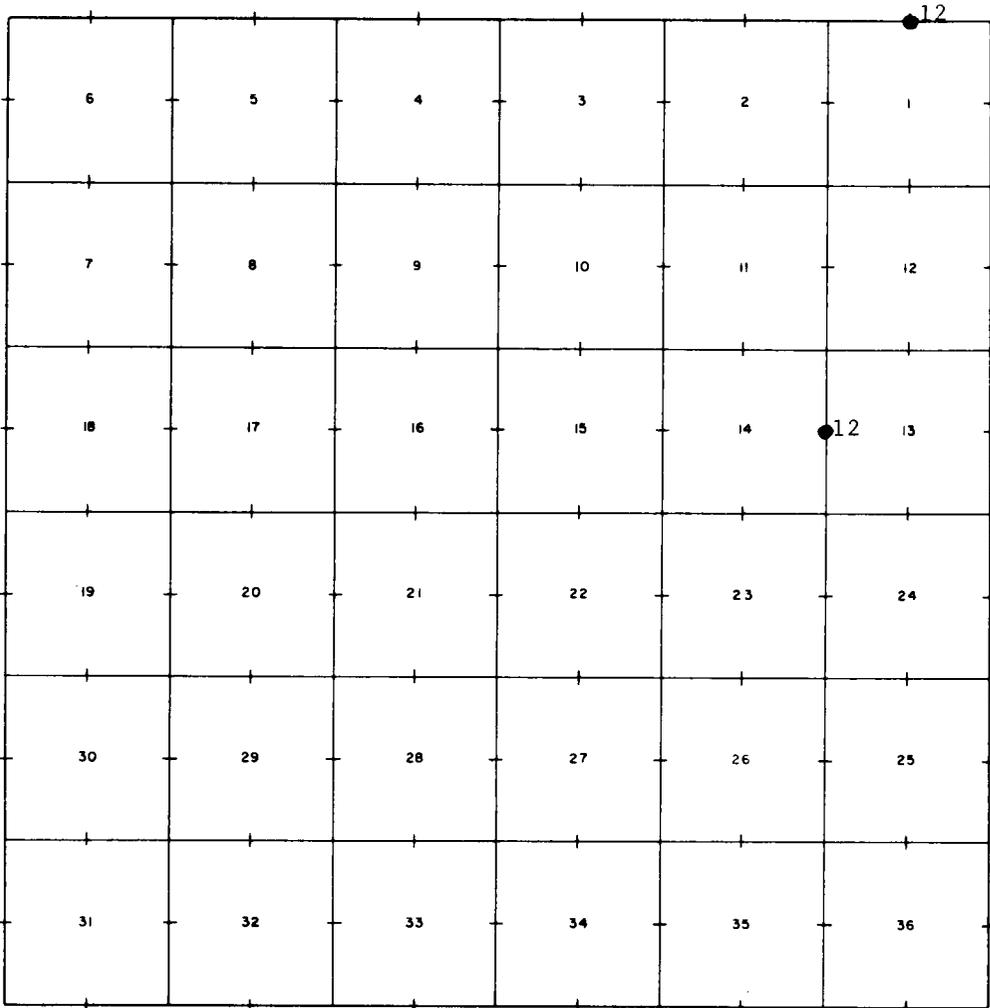


Blank

Page

CORNER REMONUMENTATION

INDEX DIAGRAM

Township 11 NORTH , Range 3 EAST , SALT LAKE Meridian

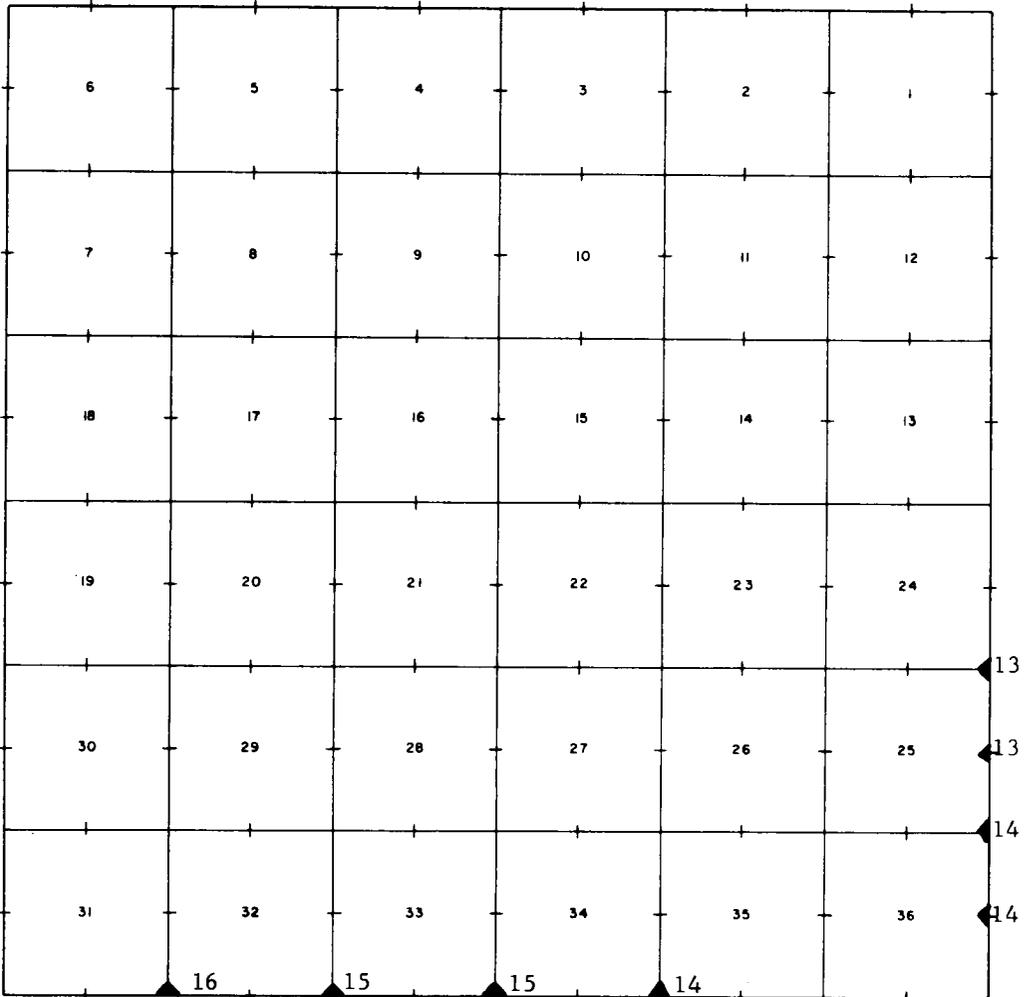


Blank

Page

CORNER REMONUMENTATION

INDEX DIAGRAM

Township 11 NORTH, Range 4 EAST, SALT LAKE Meridian

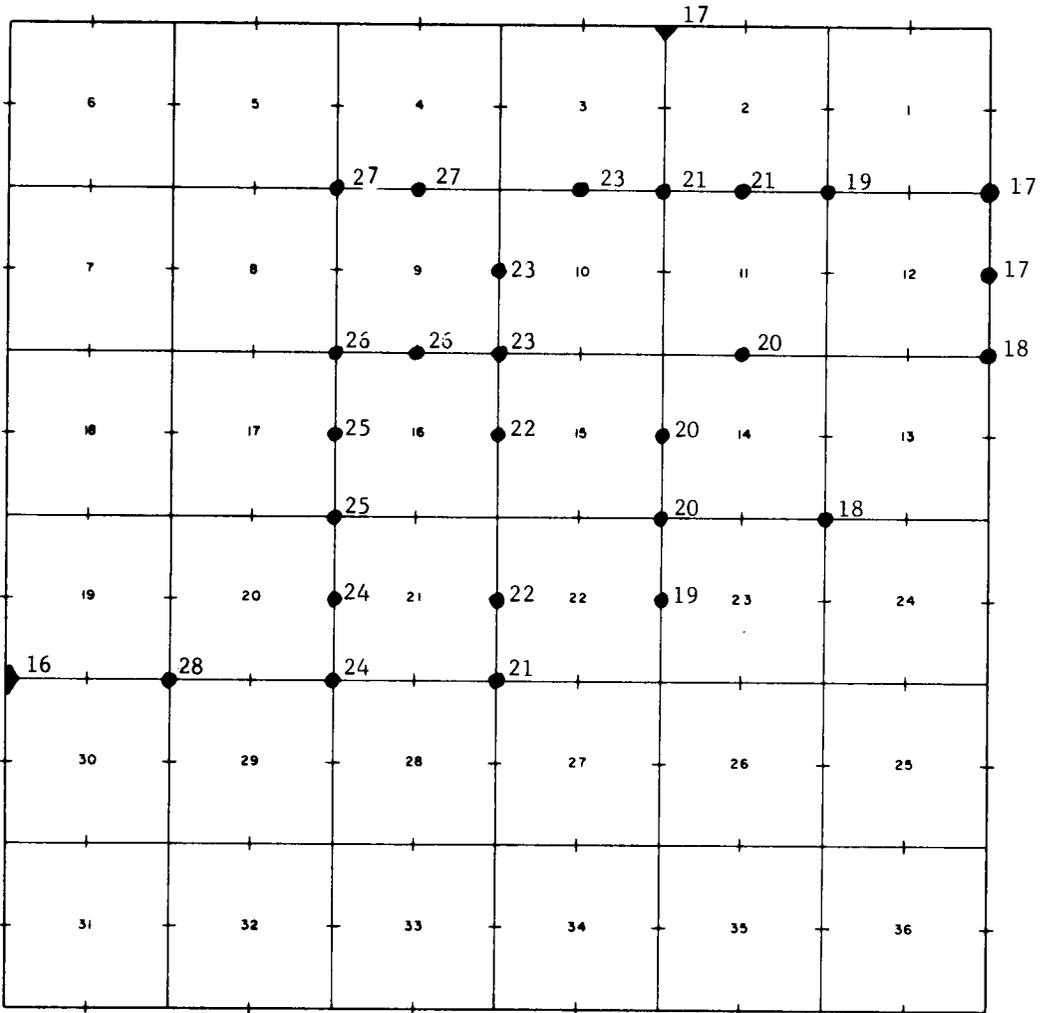


Blank

Page

CORNER REMONUMENTATION

INDEX DIAGRAM

Township 11 NORTH , Range 5 EAST , SALT LAKE Meridian

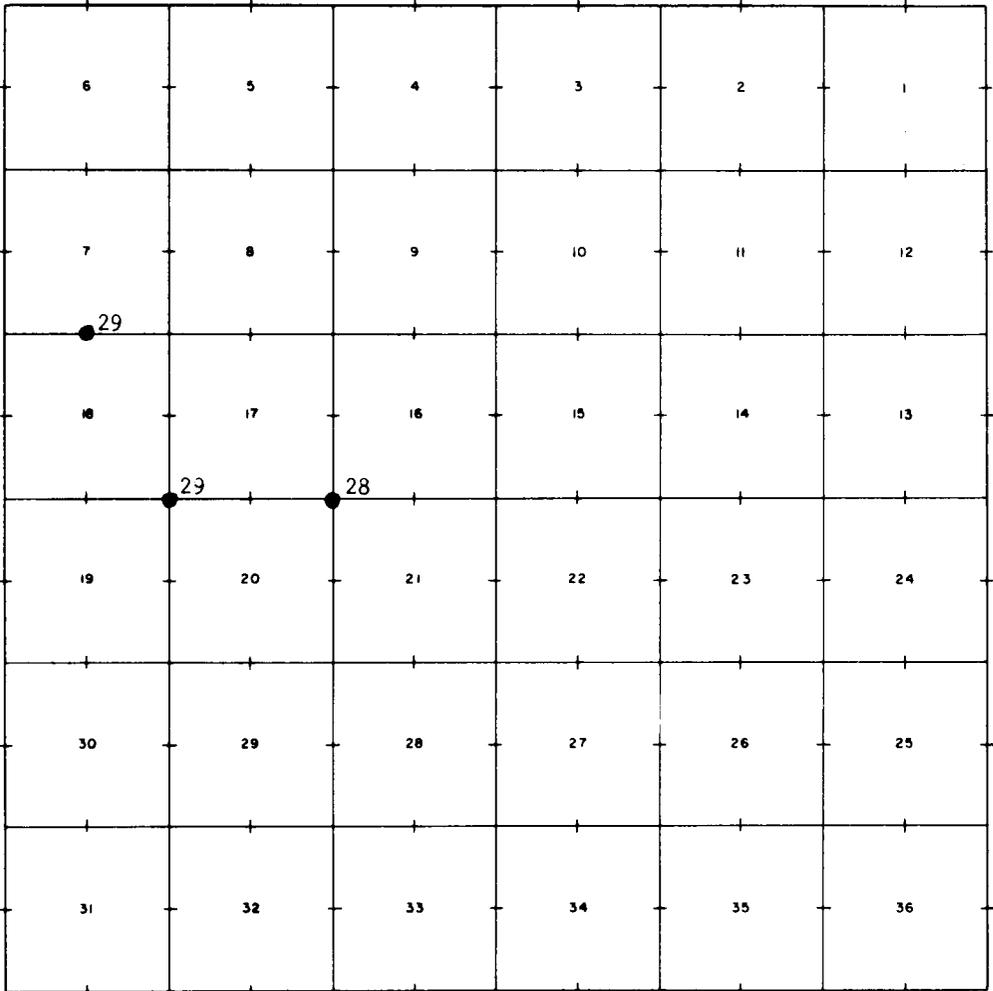


Blank

Page

CORNER REMONUMENTATION

INDEX DIAGRAM

Township 12 NORTH , Range 4 EAST , SALT LAKE Meridian

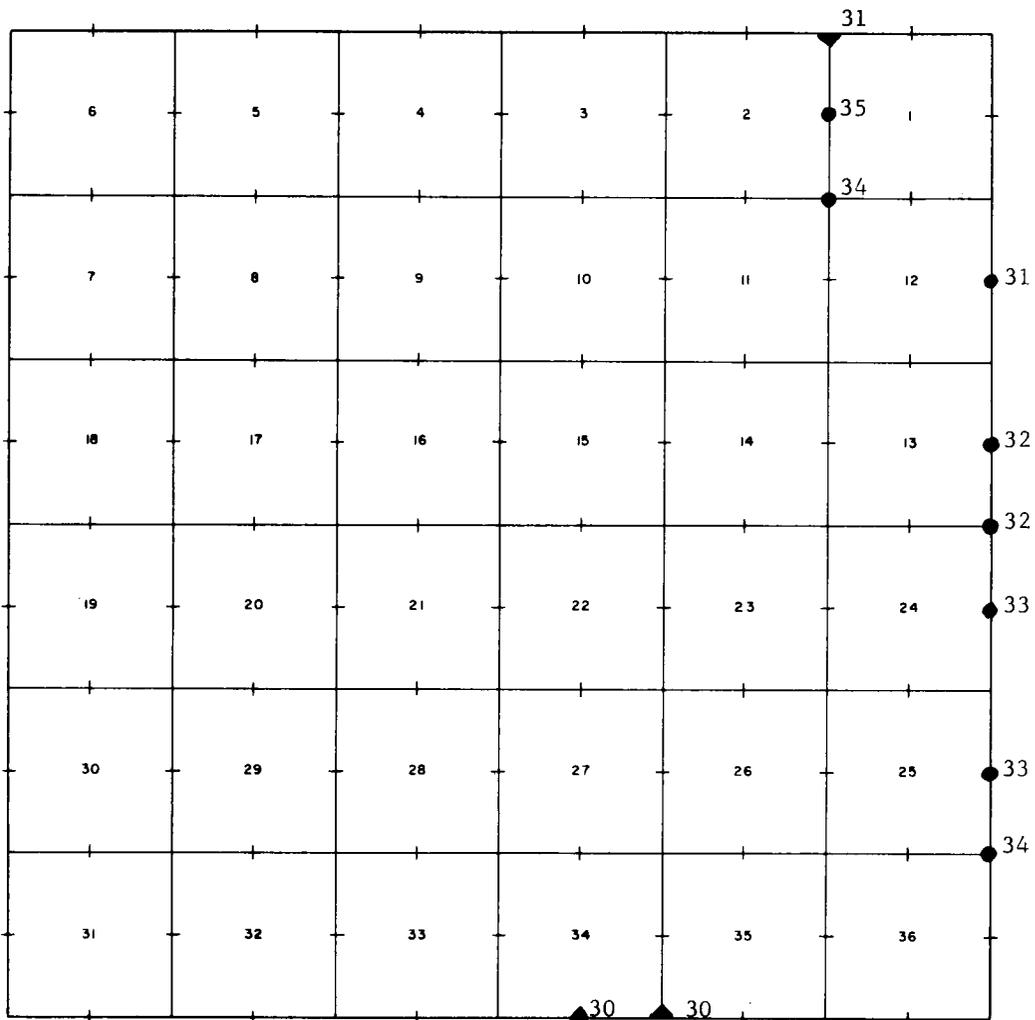


Blank

Page

CORNER REMONUMENTATION

INDEX DIAGRAM

Township 13 NORTH , Range 1 EAST , SALT LAKE Meridian

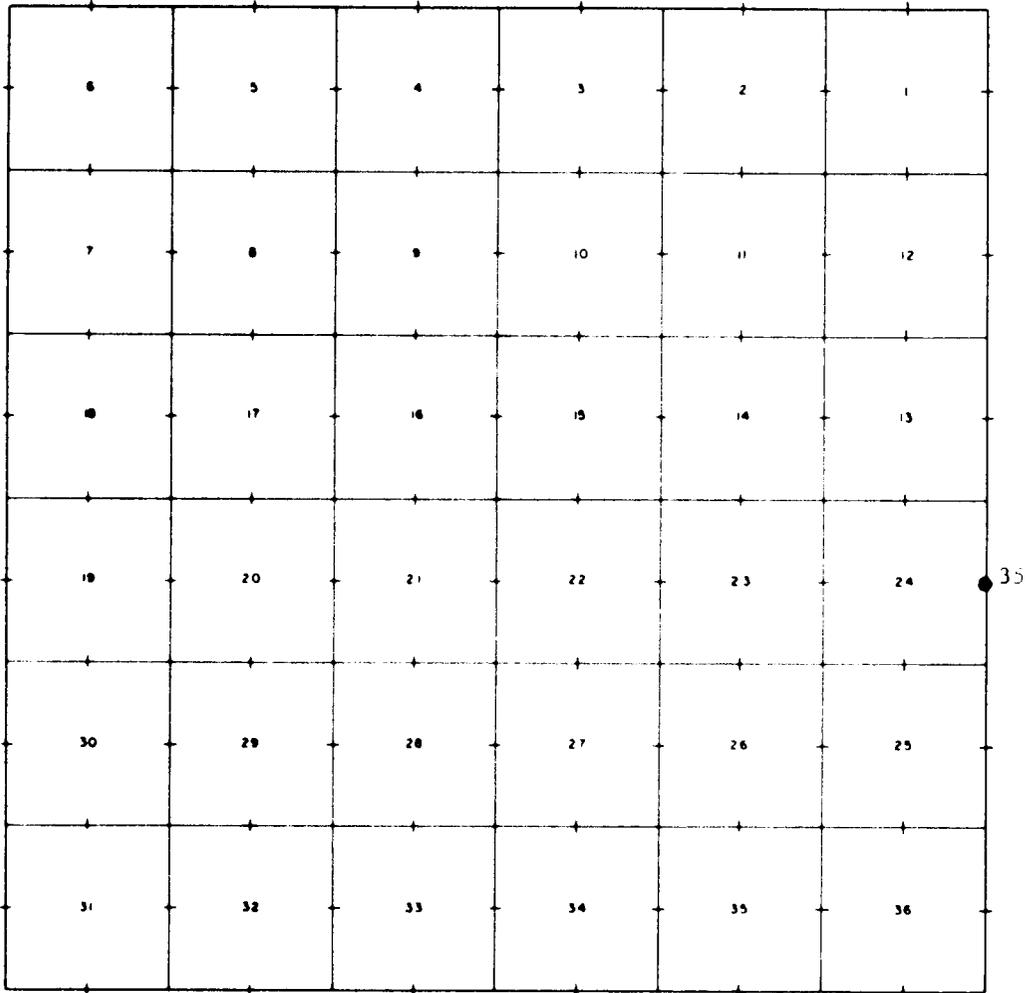


Blank

Page

CORNER REMONUMENTATION

INDEX DIAGRAM

Township 13 NORTH , Range 4 EAST , SALT LAKE Meridian

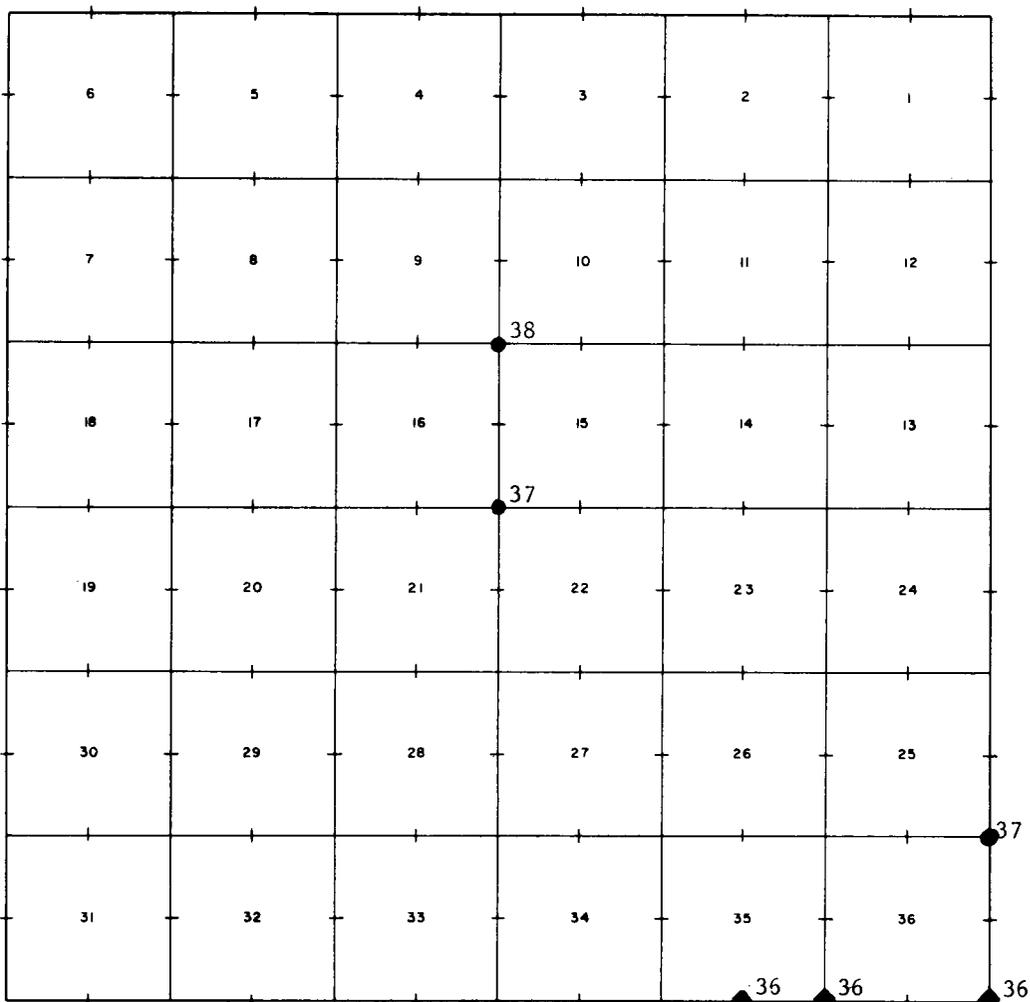


Blank

Page

CORNER REMONUMENTATION

INDEX DIAGRAM

Township 14 NORTH , Range 2 EAST , SALT LAKE Meridian

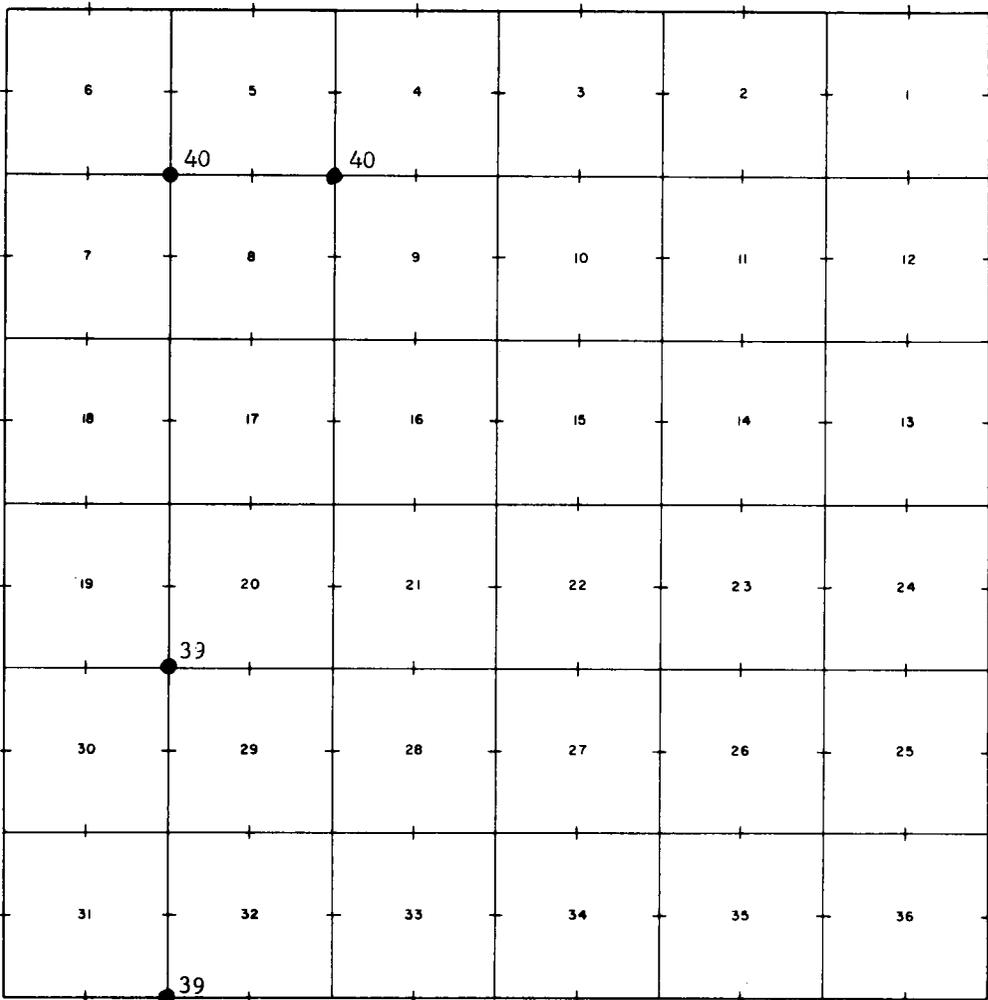


Blank

Page

CORNER REMONUMENTATION

INDEX DIAGRAM

Township 14 NORTH , Range 3 EAST , SALT LAKE Meridian

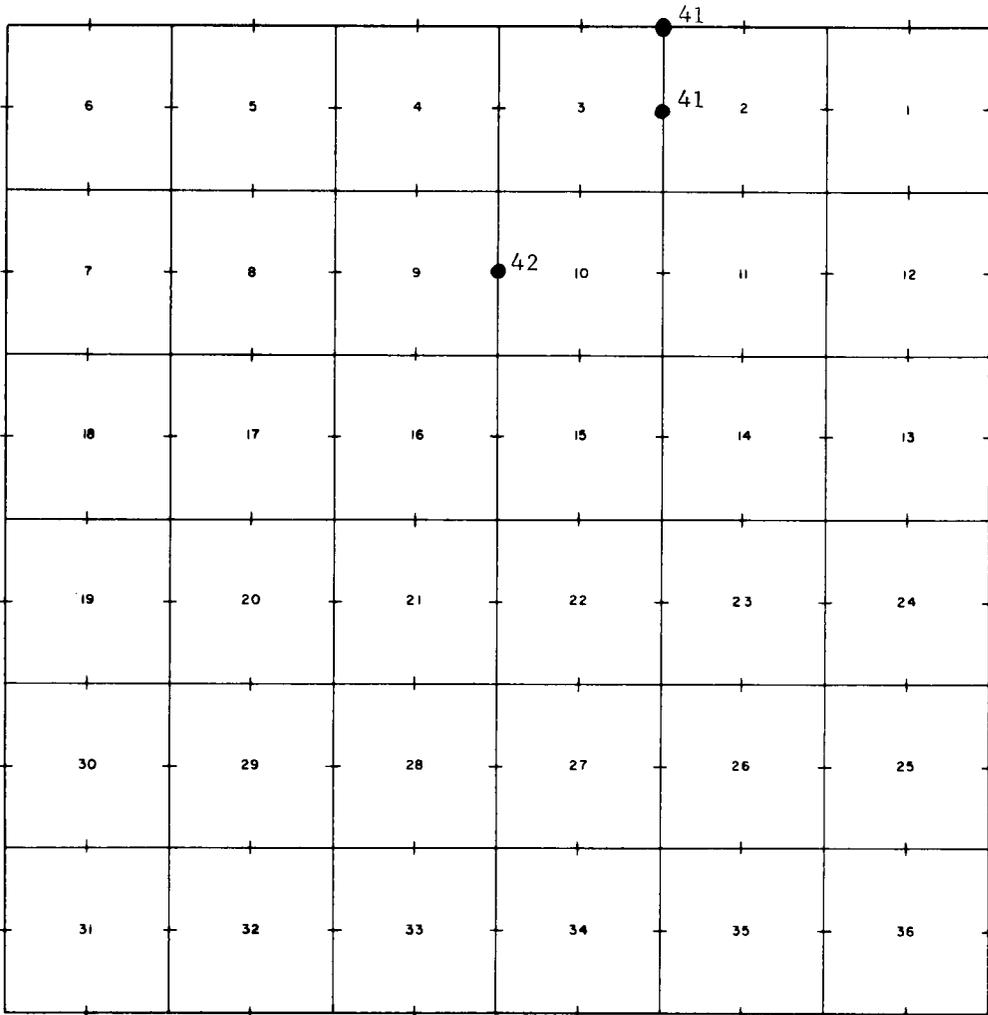


Blank

Page

CORNER REMONUMENTATION

INDEX DIAGRAM

Township 14 NORTH , Range 4 EAST , SALT LAKE Meridian

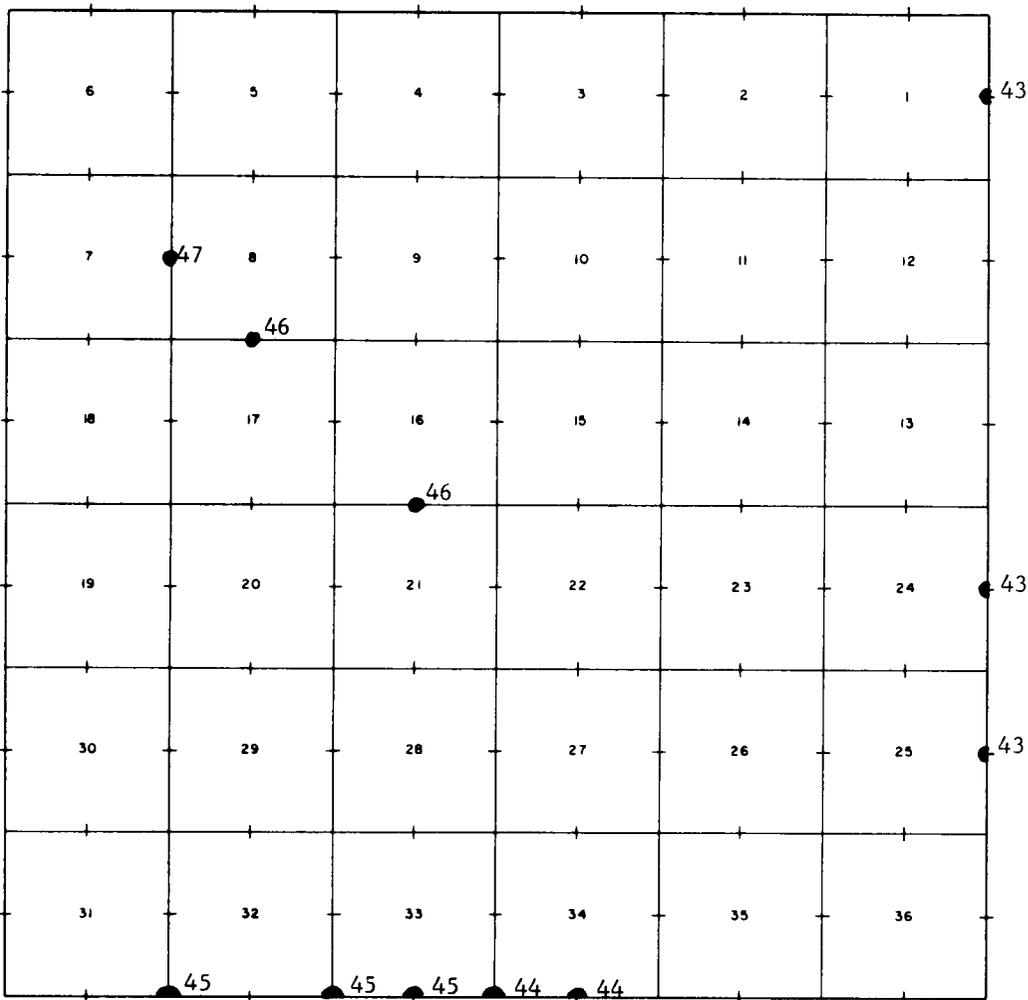


Blank

Page

CORNER REMONUMENTATION

INDEX DIAGRAM

Township 14 NORTH , Range 5 EAST , SALT LAKE Meridian

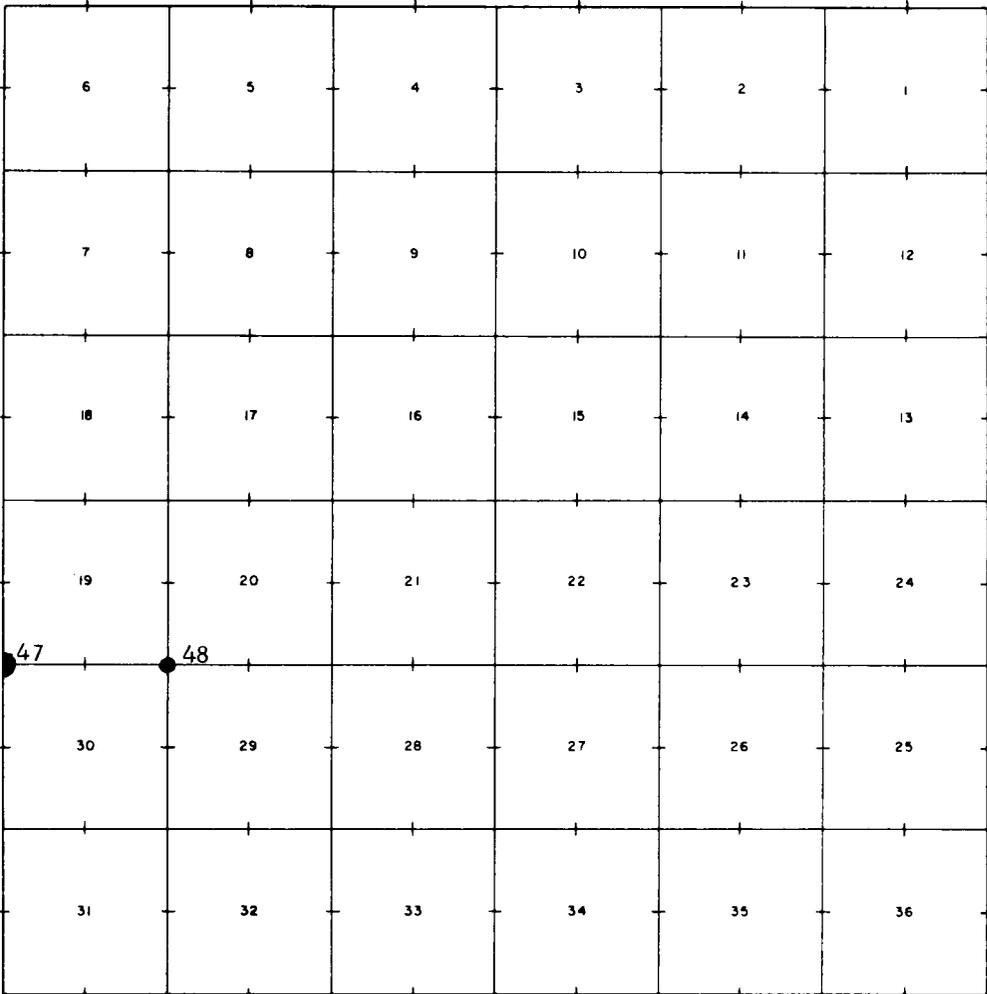

Blank

Page

Remonumentation of Corners in T. 5 N., R. 1 W.

CHAINS

The following field notes are those of the remonumentation of certain identified corners selected by the U.S. Forest Service as being located in or controlling the boundaries of Forest Service lands situated in the Cache National Forest. A Forester's Compass was used to determine the bearing of new corner accessories. The mean magnetic declinations were found to be as follows:

T. 5 N., R. 1 W. (Salt Lake Meridian)	16° 50' E.
T. 8 N., R. 1 W. " " "	16° 50' E.
T. 9 N., R. 1 W. " " "	17° 00' E.
T. 10 N., R. 1 W. " " "	17° 10' E.
T. 12 N., R. 2 W. " " "	17° 05' E.
T. 10 N., R. 3 E. " " "	16° 55' E.
T. 11 N., R. 1 E. " " "	17° 05' E.
T. 11 N., R. 3 E. " " "	16° 55' E.
T. 11 N., R. 4 E. " " "	16° 55' E.
T. 11 N., R. 5 E. " " "	16° 55' E.
T. 12 N., R. 4 E. " " "	16° 55' E.
T. 13 N., R. 1 E. " " "	17° 05' E.
T. 13 N., R. 4 E. " " "	17° 00' E.
T. 14 N., R. 2 E. " " "	17° 05' E.
T. 14 N., R. 3 E. " " "	17° 00' E.
T. 14 N., R. 4 E. " " "	16° 55' E.
T. 14 N., R. 5 E. " " "	16° 55' E.

The position of each corner was marked by the original monument or determined from corner accessories recorded in the survey record. The monumentation was requested by and accomplished in cooperation with the Forest Service

T. 5 N., R. 1 W.

Township 5 North, Range 1 West, Salt Lake Meridian, is located partially within the Cache National Forest. Surveyed by Otto E. Salomon in 1886.

At the cor. of secs. 2, 3, 10 and 11, marked with a granite stone, 18x12x10 ins., firmly set and plainly mkd. with 5 notches on S. and 2 on E. edge.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 15 ins. in the ground and in a mound of stone 3 ft. base to brass cap mkd.

T5N R1W

S3|S2
S10|S11

1968

Deposit the original stone alongside the cor.

The cor. is located on steep W. slope of hill approx. 5 chs. dist. E. of trail road that bears N. and S. In scrub oakbrush.

Remonumentation of Corners in T. 8 N., R. 1 W.

CHAINS

T. 8 N., R. 1 W.

Township 8 North, Range 1 West, Salt Lake Meridian, is located partially within the Cache National Forest. Surveyed by Arthur F. Benson in 1887.

At the closing cor. of secs. 2 and 3, marked with a limestone, 18x9x6 ins., firmly set and plainly mkd. with 4 notches on W. and 2 on E. edge, also CC on S. face, same as record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 15 ins. in the ground and in a mound of stone 3 ft. base to brass cap mkd.

```

T9N R1 W
  S35
  ---
 S3 | S2
    |
    C C
T8N R1W
  1968

```

Deposit the original stone in mound alongside the corner.

The cor. is located on S. slope of hill 7 lks. dist. E. of the standard cor. of secs. 34 and 35. In scattered oakbrush.

T. 9 N., R. 1 W.

Township 9 North, Range 1 West, Salt Lake Meridian, is located partially within the Cache National Forest. Surveyed by J. H. Martineau in 1877.

At the standard cor. of secs. 34 and 35, on the S. bdy. of Tp., marked with a limestone, 30x12x5 ins., firmly set and plainly mkd. with 4 notches on W. and 2 on E. edge, SC on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 10 ins. in the ground and in a mound of stone 3½ ft. base to brass cap mkd.

```

      SC
T9N R1W
 S34 | S35
  ---
      S3
T8N R1W
  1968

```

Deposit the original stone in mound alongside the corner.

The cor. is located on S. slope of hill 7 lks. dist. W. of the closing cor. of secs. 2 and 3. In scattered oakbrush.

Re monumentation of Corners in T. 9 N., R. 1 W.

CHAINS

At the cor. of secs. 8, 9, 16 and 17, marked with a sandstone, 18x12x6 ins., firmly set and plainly mkd. with 4 notches on S. and E. edges, same as record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 18 ins. in the ground and in a mound of stone 3 ft. base to brass cap mkd.

T9N R1W

S8|S9
S17|S16

1968

Deposit the original stone in mound alongside the corner.

The cor. is located on steep rocky S. slope of hill approx. 6 chs. dist. N. of trail road that bears N. 45° E. and S. 45° W. In scattered oakbrush.

T. 10 N., R. 1 W.

Township 10 North, Range 1 West, Salt Lake Meridian, is located partially within the Cache National Forest. Surveyed by A. J. Stewart in 1875.

At the ½ sec. cor. of secs. 20 and 29, marked with a limestone, 20x14x6 ins., firmly set and plainly mkd. ½ on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 10 ins. in the ground and in a mound of stone 3½ ft. base to brass cap mkd.

T10N R1W

½ S20
S29

1968

Deposit the original stone in mound alongside the corner.

The cor. is located on gentle E. slope of small valley that bears N. and S. 3 chs. dist. W. of cultivated land 80 lks. dist. E. of oak patch that bears N. and S. No timber.

T. 12 N., R. 2 W.

Remonumentation of Corners in T. 12 N., R. 2 W.

CHAINS

Township 12 North, Range 2 West, Salt Lake Meridian, is located partially within the Cache National Forest. Surveyed by J. H. Martineau in 1878.

At the township cor. of Tps. 11 and 12 N., Rs. 1 and 2 W., marked with a sandstone, 18x10x6 ins., firmly set and plainly mkd. with 6 grooves on all 4 sides.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground with brass cap mkd.

T12N
R2W R1W
S36 | S31
S1 | S6
T11N
1968

Deposit the original stone alongside the cor.

The cor. is located on rolling benchland at the intersection of 4 way fence line bearing N., S., E. and W. Surrounded by cultivated land.

At the cor. of secs. 25, 26, 35 and 36, marked with a sandstone, 20x18x10 ins., firmly set and plainly mkd. with 1 notch on the S. and E. edge.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 12 ins. in the ground and in a mound of stone 3½ ft. base to brass cap mkd.

T12N R2W
S26 | S25
S35 | S36
1968

Deposit the original stone in mound alongside the corner.

The cor. is located on E. slope of spur projecting N. at the intersection of 4 strand, 4 way fence line that bears N., S., E. and W. 80 lks. dist. W. of small draw that drains N. In sagebrush growth.

At the ¼ sec. cor. of secs. 25 and 36, marked with a sandstone, 20x20x8 ins., firmly set and plainly mkd. ¼ on N. face, same as record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground with brass cap mkd.

Remonumentation of Corners in T. 12 N., R. 2 W.

CHAINS

T12N R2W

$$\frac{1}{2} \frac{S25}{S36}$$

1968

Deposit the original stone alongside the cor.

The cor. is located at the intersection of 4 strand fence line that bears E., W., and N., 25 lks. dist. N. of dirt road that bears E. and W. Surrounded by cultivated land.

T. 10 N., R. 3 E.

Township 10 North, Range 3 East, Salt Lake Meridian, is located partially within the Cache National Forest. Sections 25, 26, 35 and 36 were surveyed by J. H. Martineau in 1878, the remainder by Nephi P. Anderson in 1891.

At the $\frac{1}{2}$ sec. cor. of secs. 2 and 35, on the S. bdy. of Tp., marked with a limestone, 24x7x6 ins., firmly set and plainly mkd. $\frac{1}{2}$ on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. in diam., 16 ins. in the ground and in a mound of stone 3 $\frac{1}{2}$ ft. base to brass cap mkd.

T10N R3E

$$\frac{1}{2} \frac{S35}{S2}$$

T9N R3E

1968

Deposit the original stone in mound alongside the corner.

The cor. is located on NW. slope of hill approx. 15 chs. dist. E. of improved dirt road that bears N. and S. in small canyon. In sagebrush growth.

At the cor. of secs. 2, 3, 34 and 35, on the S. bdy. of Tp., marked with a sandstone, 14x12x9 ins., firmly set and plainly mkd. with 4 notches on W. and 2 on E. edge.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. in diam., 18 ins. in the ground and in a mound of stone 3 ft. base to brass cap mkd.

T10N R3E

$$\frac{S34|S35}{S3|S2}$$

T9N R3E

1968

Remonumentation of Corners in T. 10 N., R. 3 E.

CHAINS

Deposit the original stone alongside the cor.

The cor. is located on gentle N. slope of hill 34 lks. dist. W. of net wire fence line that bears N. and S. 1 ch. S. of small draw that drains N. 30° E. In sagebrush growth.

At the cor. of secs. 5 and 6, on the N. bdy. of Tp., marked with a limestone, 18x12x6 ins., firmly set and plainly mkd. with 5 notches on E. and 1 on W. edge.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 20 ins. in the ground and in a collar of stone to brass cap mkd.

T11N R3E

S31
S6|S5

T10N R3E

1968

Deposit the original stone alongside the corner.

The cor. is located on steep W. slope of hill 6 lks. dist. W. of Forest Bdy. brass cap No. 23, same as record. Approx. 15 chs. dist. E. of bottom of canyon that drains N. In sagebrush growth.

At the ¼ sec. cor. of sec. 5 on the N. bdy. of Tp., marked with a limestone, 18x10x6 ins., firmly set and plainly mkd. ¼ on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 10 ins. in the ground and in a mound of stone 3½ ft. base to brass cap mkd.

T11N R3E

¼
S5

T10N R3E

1968

Deposit the original stone in mound alongside the corner.

The cor. is located on W. slope of hill 1 ch. dist. E. of bottom of small draw that drains N. 20° E., trail road in same draw 4 lks. dist. E. of cor. of 4 strand fence line that bears E. and S. In scattered mahogany growth.

At the cor. of secs. 4 and 5, on the N. bdy. of Tp., marked with a limestone, 16x10x2 ins., firmly set and plainly mkd. with 4 notches on E. and 2 on W. edge.

Remonumentation of Corners in T. 10 N., R. 3 E.

CHAINS

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 20 ins. in the ground and in a collar of stone to brass cap mkd.

T11N R3E

S32

S5|S4

T10N R3E

1968

Deposit the original stone alongside the cor.

The cor. is located on W. slope of hill 100 lks. dist. W. of small draw that drains N. 10° E. 3 lks. dist. N. of 4 strand fence line that bears E. and W. 6 lks. dist. W. of Forest Bdy. brass cap No. 24 (same as record). In sagebrush and chokecherry growth.

At the $\frac{1}{2}$ sec. cor. of sec. 4, on the N. bdy. of the Tp., marked with a limestone, 18x9x6 ins., firmly set and plainly mkd. $\frac{1}{2}$ on N. face, same as record.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins. in the ground and raise a mound of stone $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high to S. Brass cap mkd.

T11N R3E

$\frac{1}{2}$ ———

S4

T10N R3E

1968

Deposit the original stone alongside the cor.

The cor. is located on NW. slope of small hill 150 lks. dist. S. of trail road that bears E. and W. In scattered mahogany growth.

At the cor. of secs. 3 and 4, on the N. bdy. of the Tp., marked with a limestone, 18x8x6 ins., firmly set and plainly mkd. with 3 notches on the E. and W. edges. Same as record.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 20 ins. in the ground and in a collar of stone to brass cap mkd.

T11N R3E

S33

S4|S3

T10N R3E

1968

Deposit the original stone alongside the cor.

426
126

Remonumentation of Corners in T. 10 N., R. 3 E.

CHAINS

The cor. is located at base of small spur projecting S. 6 lks. dist. E. of Forest Bdy. brass cap No. 25, same as record. 2 lks. dist. N. of 4 strand fence line that bears E. and W. In scattered oak, aspen, mahogany and chokecherry growth.

At the cor. of secs. 2 and 3, on the N. bdy of the Tp., marked with a limestone, 18x9x6 ins., firmly set and plainly mkd. with 4 notches on W. and 2 on E. edge, same as record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 20 ins. in the ground and in a collar of stone to brass cap mkd.

T11N R3E
— S34 —
S3 | S2
T10N R3E
1968

Deposit the original stone alongside the cor.

The cor. is located in small flat 6 lks. dist. W. of Forest Bdy. brass cap No. 26 (same as record), 35 lks. dist. W. of trail road that bears N. and S. In sagebrush growth.

At the ½ sec. cor. of sec. 2, on the N. bdy. of the Tp., marked with a sandstone, 18x9x6 ins., firmly set and plainly mkd. ½ on N. face, same as record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 10 ins. in the ground and in a mound of stone 3½ ft. base to brass cap mkd.

T11N R3E
½ ———
S2
T10N R3E
1968

Deposit the original stone alongside the cor.

The cor. is located on S. slope of hill in old 4 strand fence line that bears E. and W. 130 lks. dist. N. of small draw that drains S. 80° E. In scattered aspen and cedar growth.

At the cor. of secs. 1, 2, 35 and 36, on the N. bdy. of the Tp., marked with a sandstone, 18x9x6 ins., firmly set and plainly mkd. with 5 notches on the W. and 1 on the E. edge, same as record.

Remonumentation of Corners in T. 10 N., R. 3 E.

CHAINS

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 12 ins. in the ground and in a mound of stone, $3\frac{1}{2}$ ft. base to brass cap mkd.

T11N R3E
S35 | S36
 S2 | S1
 T10N R3E
 1968

Deposit the original stone in mound alongside the corner.

The cor. is located on SE. slope of hill, 6 lks. dist. W. of Forest Bdy. brass cap No. 27, same as record. 4 chs. dist. W. of Rock Creek that flows S. 20° W. approx. 15 chs. dist. W. of main dirt road in Rock Creek Canyon that bears N. and S. In scattered cedar growth.

At the $\frac{1}{4}$ sec. cor. of secs. 1 and 36, on the N. bdy. of the Tp., marked with a granite stone, 18x15x6 ins., firmly set and plainly mkd. $\frac{1}{2}$ on N. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 20 ins. in the ground and in a mound of stone 3 ft. base to brass cap mkd.

T11N R3E
 $\frac{1}{2}$ S36
 S1
 T10N R3E
 1968

Deposit the original stone alongside the cor.

The cor. is located on gentle N. slope of hill in net wire fence line that bears N. and S. approx. 15 chs. dist. E. of dirt road that bears N. and S. In scattered aspen, cedar and chokecherry growth.

At the township cor. of Tps. 10 and 11 N., Rs. 3 and 4 E., marked with a conglomerate stone, 24x18x7 ins., firmly set and plainly mkd. with 6 notches on all 4 sides.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 16 ins. in the ground and in a mound of stone $3\frac{1}{2}$ ft. base to brass cap mkd.

T11N
 R3E R4E
S36 | S31
 S1 | S6
 T10N
 1968

428

Remonumentation of Corners in T. 10 N., R. 3 E.

CHAINS

Deposit the original stone in mound alongside the corner.

The cor. is located on top of spur projecting N. 8 lks. dist. S. of Forest Bdy. brass cap No. 29 approx. 20 chs. dist. S. of Rock Creek that flows W. In sagebrush growth.

At the $\frac{1}{2}$ sec. cor. of secs. 19 and 24, on the E. bdy. of the Tp., marked with a sandstone, 18x8x6 ins., firmly set and plainly mkd. $\frac{1}{2}$ on W. face, same as record.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins. in the ground and raise a mound of stone $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high to W. Brass cap mkd.

T10N
R3E R4E
 $\frac{1}{2}$
S24|S19
1968

Deposit the original stone alongside the cor.

The cor. is located in small draw that drains N. 20° W. approx. 6 chs. dist. S. of trail road that bears N. 30° E. and S. 30° W. In sagebrush growth.

At the $\frac{1}{2}$ sec. cor. of secs. 31 and 36, on the E. bdy. of the Tp., marked with a sandstone, 18x12x6 ins., firmly set and plainly mkd. $\frac{1}{2}$ on W. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 18 ins. in the ground and in a collar of stone to brass cap mkd.

T10N
R3E R4E
 $\frac{1}{2}$
S36|S31
1968

Deposit the original stone alongside the cor.

The cor. is located 100 lks. dist. N. of top of high spur projecting N. 70° W. at the S. edge of grove of scrub aspen that bears E. and W.

At the $\frac{1}{2}$ sec. cor. of secs. 25 and 26, marked with a quartzite stone, 18x12x6 ins., firmly set and plainly mkd. $\frac{1}{2}$ on W. face, same as record.

At the cor. point

Remonumentation of Corners in T. 10 N., R. 3 E.

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 12 ins. in the ground and in a mound of stone, $3\frac{1}{2}$ ft. base to brass cap mkd.

T10N R3E

$\frac{1}{2}$
S26 | S25

1968

Deposit the original stone in mound alongside the corner.

The cor. is located on SW. slope of hill approx. 6 chs. dist. N. of trail road at base of hill that bears N. 60° W. and S. 60° E. about 10 chs. dist. N. of Blacksmith Fork River that flows N. 60° W. In sagebrush growth.

At the $\frac{1}{2}$ sec. cor. of secs. 13 and 14, marked with a quartzite stone, 18x10x6 ins., firmly set and plainly mkd. $\frac{1}{2}$ on W. face, same as record.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 10 ins. in the ground and in a mound of stone $3\frac{1}{2}$ ft. base to brass cap mkd.

T10N R3E

$\frac{1}{2}$
S14 | S13

1968

Deposit the original stone in mound alongside the corner.

From which I mark

A cedar, 7 ins. in diam., bears N. $13^\circ 30'$ W., 40 lks. dist., mkd. $\frac{1}{2}$ S14 BT.

The cor. is located on gentle N. slope of hill 190 lks. dist. S. of improved gravel road that bears N. 74° E. and S. 74° W. In scattered cedar growth.

At the $\frac{1}{2}$ sec. cor. of secs. 12 and 13, marked with a sandstone, 18x10x3 ins., firmly set and plainly mkd. $\frac{1}{2}$ on N. face, same as record.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 10 ins. in the ground and in a mound of stone 3 ft. base to brass cap. Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, to N. Brass cap mkd.

T10N R3E

$\frac{1}{2}$ — S12
S13

1968

Remonumentation of Corners in T. 10 N., R. 3 E.

CHAINS

Deposit the original stone in mound alongside the corner.

The cor. is located on rocky NW. slope of hill 4 chs. dist. E. of improved gravel road that bears N. and S. in small canyon. In sagebrush growth.

Township 11 North, Range 1 East, Salt Lake Meridian, is located partially within the Cache National Forest. Surveyed by J. H. Martineau in 1878.

At the $\frac{1}{4}$ sec. cor. of secs. 1 and 36, on the N. bdy. of the Tp., marked with a limestone, 20x12x12 ins., firmly set and plainly mkd. $\frac{1}{4}$ on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. in diam., 12 ins. in the ground and in a mound of stone, 3 $\frac{1}{2}$ ft. base to brass cap mkd.

T12N R1E

$\frac{1}{4}$ S36
S1

T11N R1E

1968

Deposit the original stone in mound alongside the corner.

The cor. is located in bottom of Dry Canyon 2 chs. N. of trail road in canyon that bears E. and W. In scattered cedar, oak and chokecherry growth.

At the $\frac{1}{4}$ sec. cor. of secs. 13 and 14, marked with a limestone, 20x14x8 ins., firmly set, but dimly mkd. This cor. was confirmed by the Cache County surveyor who has used it before.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. in diam., 14 ins. in the ground and in a mound of stone 3 $\frac{1}{2}$ ft. base to brass cap mkd.

T11N R1E

$\frac{1}{4}$
S14|S13

1968

Deposit the original stone in mound alongside the corner.

The cor. is located in bottom of Providence Canyon 150 lks. dist. N. of trail road that bears E. and W. In dense chokecherry, oak and cottonwood tree growth.

Remonumentation of Corners in T. 11 N., R. 1 E.

CHAINS

T. 11 N., R. 3 E.

Township 11 North, Range 3 East, Salt Lake Meridian, is located within the Cache National Forest. The E. bdy. was surveyed by Andrew P. Hanson and Henry E. Giers in 1900. The subdivisional lines were surveyed by Andrew P. Hanson in 1901.

At the cor. of secs. 24 and 25, on the E. bdy. of the Tp., marked with a quartzite stone, 18x10x7 ins., firmly set and plainly mkd. with 4 notches on the N. and 2 on the S. edge, same as record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 12 ins. in the ground and in a mound of stone 3½ ft. base to brass cap mkd.

T11N
R3E R4E
S24 | S30
S25 |
1968

Deposit the original stone in mound alongside the corner.

The cor. is located on steep NW. slope of hill 6 lks. dist. S. of Forest Bdy. brass cap No. 32, (same as record), approx. 21 chs. dist. S. of Saddle Creek that drains S. 45° W. In sagebrush and chokecherry growth.

At the ¼ sec. cor. of sec. 25, on the E. bdy. of the Tp., marked with a quartzite stone 24x7x6 ins., firmly set and plainly mkd. ¼ on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 10 ins. in the ground and in a mound of stone 3½ ft. base to brass cap mkd.

T11N
R3E R4E
¼
S25 |
1968

Deposit the original stone in mound alongside the corner.

The cor. is located on top of ridge that bears N. and S. approx. 25 chs. dist. W. of trail road that bears N. and S. In sagebrush growth.

432

Remonumentation of Corners in T. 11 N., R. 3 E.

CHAINS

At the cor. of secs. 25 and 36, on the E. bdy. of the Tp., marked with a sandstone, 18x10x6 ins., firmly set and plainly mkd. with 5 notches on the N. and 1 on the S. edge, same as record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 18 ins. in the ground and in a mound of stone 3 ft. base to brass cap mkd.

T11N
R3E R4E
S25 | S31
S36 |

1968

Deposit the original stone alongside the cor.

The cor. is located on SE. slope of hill 4 chs. dist. N. of trail road that bears N. 30° E. and S. 30° W. 6 lks. dist. S. of Forest Bdy. brass cap No. 31, same as record. In scattered aspen and cedar growth.

At the ¼ sec. cor. of sec. 36, on the E. bdy. of the Tp., marked with a sandstone, 18x10x6 ins., firmly set and plainly mkd. ¼ on W. face, same as record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 12 ins. in the ground and in a mound of stone 3½ ft. base to brass cap mkd.

T11N
R3E R4E
¼
S36 |

1968

Deposit the original stone in mound alongside the corner.

The cor. is located on SE. slope of hill 60 lks. dist. W. of small draw that drains S. approx. 20 chs. dist., N. of Rock Creek that flows W. In very scattered cedar growth.

At the closing cor. of secs. 34 and 35, on the S. bdy. of the Tp., marked with a limestone, 20x12x7 ins., firmly set and plainly mkd. with 4 notches on the W. and 2 on the E. edge, CC on the N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 20 ins. in the ground and in a collar of stone to brass cap mkd.

Remonumentation of Corners in T. 11 N., R. 3 E.

CHAINS

T11N R3E
 CC
 S34 | S35
 S2
 T10N R3E
 1968

Deposit the original stone alongside the cor.

The cor. is located in small flat 45 lks. dist. E. of trail road that bears N. and S. In sagebrush growth.

At the closing cor. of secs. 33 and 34, on the S. bdy. of the Tp., marked with a limestone, 18x8x4 ins., firmly set and plainly mkd. with 3 notches on the E. and W. edges, CC on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 20 ins. in the ground and in a collar of stone to brass cap mkd.

T11N R3E
 CC
 S33 | S34
 S3
 T10N R3E
 1968

Deposit the original stone alongside the corner.

The cor. is located on nearly level benchland 2 lks. dist. N. of 4 strand fence line that bears E. and W. In scattered oak, aspen and mahogany growth.

At the closing cor. of secs. 32 and 33, on the S. bdy. of the Tp., marked with a limestone, 20x14x3 ins., firmly set and plainly mkd. with 4 notches on the E. and 2 on the W. edge, CC on the N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 20 ins. in the ground and in a collar of stone to brass cap mkd.

T11N R3E
 CC
 S32 | S33
 S4
 T10N R3E
 1968

Deposit the original stone alongside the cor.

The cor. is located in bottom of small draw that drains N. 10° E. 2 lks. dist. S. of 4 strand fence line that bears E. and W. 4 chs. dist. W. of trail road that bears N. and S. In sagebrush and chokecherry growth.

Remonumentation of Corners in T. 11 N., R. 3 E.

CHAINS

At the closing cor. of secs. 31 and 32, on the S. bdy. of the Tp., marked with a limestone, 15x10x8 ins., firmly set and plainly mkd. with 5 notches on the E. and 1 on the W., and CC on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground and raise a mound of stone, 3½ ft. base, 1½ ft. high to N. Brass cap mkd.

T11N R3E
CC
S31|S32
S5
T10N R3E
1968

Deposit the original stone alongside the cor.

The cor. is located on steep W. slope of hill approx. 17 chs. dist. E. of bottom of canyon that drains N. In sagebrush growth.

T. 11 N., R. 4 E.

Township 11 North, Range 4 East, Salt Lake Meridian, is located partially within the Cache National Forest. Surveyed by Andrew P. Hanson and Henry E. Giers in 1900.

At the closing cor. of secs. 19 and 30, on the W. bdy. of the Tp., marked with a quartzite stone, 24x12x6 ins., firmly set and plainly mkd. with 4 notches on N. and 2 on S. edge, CC on E. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 20 ins. in the ground and in a collar of stone to brass cap mkd.

T11N
R3E R4E
S24 | S19 CC
S30
1968

Deposit the original stone alongside the cor.

From which I mark

A pine, 7 ins. in diam., bears N. 89° E., 36 lks. dist., mkd. T11N R4E S19 BT.

A pine, 7 ins. in diam., bears S. 73° E., 14 lks. dist., mkd. T11N R4E S30 BT.

The cor. is located on steep N. slope of hill approx. 15 chs. dist. S. of Saddle Creek that drains S. 45° W. In dense pine, aspen and chokecherry growth.

Remonumentation of Corners in T. 11 N., R. 4 E.

CHAINS

At the closing cor. of secs. 2 and 3, on the N. bdy. of the Tp., marked with a sandstone, 18x7x6 ins., firmly set and plainly mkd. with 4 notches on W. and 2 on E. edge, CC on S. face. Same as record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 20 ins. in the ground and in a collar of stone to brass cap mkd.

T12N R4E

S35
S3 S2
CC

T11N R4E

1968

Deposit the original stone alongside the cor.

From which I mark

An aspen, 5 ins. in diam., bears S. 24° W., 24 lks. dist., mkd. T11N R4E S3 BT.

The cor. is located on W. slope of hill 2 chs. dist. E. of small draw that drains N. 25° W. 60 lks. dist. S. of 4 strand fence line that bears E. and W. In scattered aspen growth.

At the cor. of secs. 1, 6, 7 and 12, on the E. bdy. of the Tp., marked with a quartzite stone, 18x9x6 ins., firmly set and plainly mkd. with 5 notches on the S. and 1 on the N. edge, same as record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 12 ins. in the ground and in a mound of stone 3½ ft. base to brass cap mkd.

T11N
R4E R5E

S1 S6
S12 S7

1968

Deposit the original stone in mound alongside the corner.

The cor. is located on S. slope of hill 2 chs. dist. N. of draw that drains W. In sagebrush growth.

At the ¼ sec. cor. of secs. 7 and 12, on the E. bdy. of the Tp., marked with a sandstone, 18x9x6 ins., firmly set and plainly mkd. ¼ on W. face, same as record.

Remonumentation of Corners in T. 11 N., R. 4 E.

CHAINS

At the cor. point.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins. in the ground and raise a mound of stone, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high to W. Brass cap mkd.

T11N
R4E R5E
 $\frac{1}{2}$
S12|S7
1968

Deposit the original stone alongside the cor.

The cor. is located 150 lks. dist. N. of top of spur that projects N. 30° E. In dense chokecherry growth.

At the cor. of secs. 7, 12, 13 and 18, on the E. bdy. of the Tp., marked with a sandstone, 18x8x6 ins., firmly set and plainly mkd. with 4 notches on the S. and 2 on the N. edge, same as record.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins. in the ground and raise a mound of stone, $3\frac{1}{2}$ ft. base, to brass cap mkd.

T11N
R4E R5E
S12|S7
S13|S18
1968

Deposit the original stone in mound alongside the corner.

The cor. is located on steep W. slope of hill approx. 5 chs. dist. N. of draw that drains N. 10° W. In sagebrush growth.

At the cor. of secs. 13, 14, 23 and 24, marked with a sandstone, 17x9x6 ins., firmly set and plainly mkd. with 3 notches on the S. and 1 on the E. edge.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 20 ins. in the ground and in a collar of stone to brass cap mkd.

T11N R4E
S14|S13
S23|S24
1968

Deposit the original stone alongside the cor.

Remonumentation of Corners in T. 11 N., R. 4 E.

CHAINS

The cor. is located on steep W. slope of hill approx. 8 chs. dist. W. of top of ridge that bears N. and S. 3 chs. dist. E. of aspen grove that bears N. and S. In sagebrush growth.

At the cor. of secs. 1, 2, 11 and 12, marked with a broken sandstone, 18x9x6 ins., firmly set and plainly mkd. with 5 notches on the S. and 1 on the E. edge.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 20 ins. in the ground and in a collar of stone to brass cap mkd.

T11N R4E

S2|S1
S11|S12

1968

Deposit the original stone alongside the cor.

The cor. is located on W. slope of hill 142 lks. dist. E. of 4 strand Forest Bdy. fence line that bears N. and S. 438 lks. dist. E. of trail road that bears N. and S. In sagebrush growth.

At the ¼ sec. cor. of secs. 22 and 23, marked with a sandstone, 18x9x6 ins., firmly set and plainly mkd. ¼ on the W. face, same as record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 22 ins. in the ground and in a collar of stone to brass cap mkd.

T11N R4E

¼
S22|S23

1968

Deposit the original stone alongside the cor.

From which I mark

An aspen, 7 ins. in diam., bears S. 61° E., 38 lks. dist., mkd. ¼ S23 BT.

An aspen, 10 ins. in diam., bears N. 40° W., 38 lks. dist., mkd. ¼ S22 BT.

The cor. is located on E. side of Strawberry Valley approx. 6 chs. dist. S. of trail road that bears N. 30° W. and S. 30° E. In dense aspen growth.

Remonumentation of Corners in T. 11 N., R. 4 E.

CHAINS

At the cor. of secs. 14, 15, 22 and 23, marked with a sandstone, 17x9x6 ins., firmly set and plainly mkd. with 3 notches on the S. and 2 on the E. edge, same as record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 20 ins. in the ground and in a collar of stone to brass cap mkd.

T11N R4E

S15|S14
S22|S23

1968

Deposit the original stone alongside the cor.

The cor. is located on E. edge of Strawberry Valley 60 lks. dist. N. of aspen grove that bears E. and W. approx. 15 chs. dist. E. of trail road that bears N. and S. In sagebrush growth.

At the ¼ sec. cor. of secs. 14 and 15, marked with a sandstone, 18x9x6 ins., firmly set and plainly mkd. ¼ on W. face, same as record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground and raise a mound of stone 3½ ft. base, 1½ ft. high to W. Brass cap mkd.

T11N R4E

¼
S15|S14

1968

Deposit the original stone alongside the cor.

The cor. is located on gentle E. slope of small rise in Strawberry Valley 40 lks. dist. N. of trail road that bears N. 10° E. and S. 10° W. In sagebrush growth.

At the ¼ sec. cor. of secs. 11 and 14, marked with a sandstone, 18x9x6 ins., firmly set and plainly mkd. ¼ on N. face, same as record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground and raise a mound of stone 3½ ft. base, 1½ ft. high to N. Brass cap mkd.

T11N R4E

¼ — S11
S14

1968

Remonumentation of Corners in T. 11 N., R. 4 E.

CHAINS

Deposit the original stone alongside the cor.

The cor. is located on top of small spur projecting N. 40° E. approx. 8 chs. dist. W. of trail road in Strawberry Valley that bears N. and S. In sagebrush growth.

At the cor. of secs. 2, 3, 10 and 11, marked with a sandstone, 17x10x6 ins., firmly set and plainly mkd. with 5 notches on the S. and 2 on the E. edge, same as record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 20 ins. in the ground and in a collar of stone to brass cap mkd.

T11N R4E

S3	S2
S10	S11

1968

Deposit the original stone alongside the cor.

The cor. is located on steep N. slope of hill approx. 350 lks. dist. S. of trail road in creek bottom that bears E. and W. about 100 ft. above road. In sagebrush growth.

At the ¼ sec. cor. of secs. 2 and 11, marked with a sandstone, 18x9x6 ins., firmly set and plainly mkd. ¼ on N. face, same as record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 15 ins. in the ground and in a mound of stone 3 ft. base to brass cap mkd.

T11N R4E

¼	S2
	S11

1968

Deposit the original stone alongside the cor.

The cor. is located in nearly level sagebrush flat 295 lks. dist. W. of trail road that bears S. 40° E. and N. 40° W. No timber.

At the cor. of secs. 21, 22, 27 and 28, marked with a sandstone, 17x9x6 ins., firmly set and plainly mkd. with 3 notches on the E. and 2 on the S. edge.

Remonumentation of Corners in T. 11 N., R. 4 E.

CHAINS

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins. in the ground and raise a mound of stone 3 ft. base, $1\frac{1}{2}$ ft. high to W. Brass cap mkd.

T11N R4E

S21|S22
S28|S27

1968

Deposit the original stone alongside the cor.

The cor. is located in bottom of small valley approx. 6 chs. wide that drains N. 20 lks. dist. W. of trail road that bears N. and S. In sagebrush growth.

At the $\frac{1}{4}$ sec. cor. of secs. 21 and 22, marked with a sandstone, 20x10x8 ins., firmly set and plainly mkd. $\frac{1}{4}$ on the W. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins. in the ground and raise a mound of stone, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high to W. Brass cap mkd.

T11N R4E

$\frac{1}{4}$
S21|S22

1968

Deposit the original stone alongside the cor.

The cor. is located on N. slope of hill 3 chs. dist. N. of top of hill that bears E. and W. In scattered aspen growth.

At the $\frac{1}{4}$ sec. cor. of secs. 15 and 16, marked with a sandstone, 18x9x6 ins., firmly set and plainly mkd. $\frac{1}{4}$ on W. face, same as record.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 15 ins. in the ground and in a mound of stone $3\frac{1}{2}$ ft. base to brass cap mkd.

T11N R4E

$\frac{1}{4}$
S16|S15

1968

Deposit the original stone in mound alongside the corner.

The cor. is located on E. slope of small spur projecting E. into Strawberry Valley 5 chs. dist. N. of improved dirt road that bears N. 45° E. and S. 45° W. In sagebrush growth.

Remonumentation of Corners in T. 11 N., R. 4 E.

CHAINS

At the cor. of secs. 9, 10, 15 and 16, marked with a sandstone, 17x9x6 ins., firmly set and plainly mkd. with 4 notches on the S. and 3 on the E. edge.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 20 ins. in the ground and in a collar of stone to brass cap. Raise a mound of stone 3½ ft. base 1½ ft. high to W. Brass cap mkd.

T11N R4E

S9	S10
S16	S15
1968	

Deposit the original stone alongside the cor.

The cor. is located in small clearing on E. slope of hill approx. 22 chs. dist. W. of trail road that bears N. and S. In chokecherry growth.

At the ¼ sec. cor. of secs. 9 and 10, marked with a sandstone, 18x9x6 ins., firmly set and plainly mkd. ¼ on W. face, same as record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground and raise a mound of stone, 3½ ft. base, 1½ ft. high to W. Brass cap mkd.

T11N R4E

¼	
S9	S10
1968	

Deposit the original stone alongside the cor.

From which I mark

An aspen, 6 ins. in diam., bears N. 35° E., 12 lks, dist., mkd. ¼ S10 BT.

An aspen, 8 ins. in diam., bears S. 47° 30' W., 33 lks, dist., mkd. ¼ S9 BT.

The cor. is located on gentle E. slope of hill 2 chs. dist. E. of trail road that bears N. and S. In dense aspen growth.

At the ¼ sec. cor. of secs. 3 and 10, marked with a sandstone, 18x12x6 ins., firmly set and plainly mkd. ¼ on N. face.

Remonumentation of Corners in T. 11 N., R. 4 E.

CHAINS

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 20 ins. in the ground and in a collar of stone to brass cap mkd.

T11N R4E
 $\frac{1}{4}$ S3
 S10
 1968

Deposit the original stone alongside the cor.

The cor. is located on top of sagebrush bench about 6 chs. dist. E. of aspen grove that bears N. and S. approx. 20 chs. dist. S. of trail road that bears E. and W.

At the cor. of secs. 20, 21, 28 and 29, mkd. with a sandstone, 18x9x6 ins., firmly set and plainly mkd. with 4 notches on the E. and 2 on the S. edge, same as record.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 15 ins. in the ground and in a mound of stone $3\frac{1}{2}$ ft. base to brass cap mkd.

T11N R4E

S20 | S21
S29 | S28
 1968

Deposit the original stone in mound alongside the corner.

The cor. is located on SE. slope of hill approx. 10 chs. dist. W. of trail road that bears N. 25° E. and S. 25° W. and about 12 chs. dist. N. of same road that bears N. 45° E. and S. 45° W. In dense choke-cherry growth.

At the $\frac{1}{4}$ sec. cor. of secs. 20 and 21, marked with a quartzite stone, 18x10x6 ins., firmly set and plainly mkd. $\frac{1}{4}$ on W. face.

from which the remains of the original bearing tree

A mahogany, 8 ins. in diam., bears S. 49° 27' E., 70 lks. dist., mkd. $\frac{1}{4}$ S21 BT,

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 12 ins. in the ground and in a mound of stone $3\frac{1}{2}$ ft. base to brass cap mkd.

Remonumentation of Corners in T. 11 N., R. 4 E.

CHAINS

T11N R4E

 $\frac{1}{2}$
 S20 | S21
 1968

Deposit the original stone in mound alongside the corner.

The cor. is located on steep W. slope of spur projecting N. 20° W. about 10 chs. dist. N. of large rocky draw that drains N. 25° W. approx. 17 chs. dist. S. of trail road that bears N. 50° E. and S. 50° W. In scattered mahogany growth.

At the cor. of secs. 16, 17, 20 and 21, marked with a quartzite stone, 18x9x6 ins., firmly set and plainly mkd. with 4 notches on the E. and 3 on the S. edge, same as record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 20 ins. in the ground and in a collar of stone to brass cap. Raise a mound of stone 3½ ft. base 1½ ft. high to W. Brass cap mkd.

T11N R4E

 $\frac{1}{2}$
 S17 | S16
 S20 | S21

1968

Deposit the original stone alongside the cor.

The cor. is located on NW. slope of hill in scattered aspen, pine and chokecherry growth.

At the $\frac{1}{2}$ sec. cor. of secs. 16 and 17, marked with a sandstone, 18x14x10 ins., firmly set and plainly mkd. $\frac{1}{2}$ on W. face.

from which the remains of the original bearing trees

A mahogany, 10 ins. in diam., bears S. 23° 20' E., 110 lks. dist., mkd. $\frac{1}{2}$ S16 BT.

A mahogany, 6 ins. in diam., bears N. 22° 45' W., 100 lks. dist., mkd. $\frac{1}{2}$ S17 BT.

Original bearing trees in good shape.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 12 ins. in the ground and in a mound of stone 3½ ft. base to brass cap mkd.

T11N R4E

 $\frac{1}{2}$
 S17 | S16

1968

Remonumentation of Corners in T. 11 N., R. 4 E.

CHAINS

Deposit the original stone in mound alongside the corner.

The cor. is located on steep broken W. face of hill approx. 500 ft. above Saddle Creek. In dense mahogany growth.

At the cor. of secs. 8, 9, 16 and 17, marked with a limestone, 18x9x6 ins., firmly set and plainly mkd. with 4 notches on the S. and E. edges, same as record.

At the cor. point,

Set an iron post, 30 ins. long, 2½ ins. in diam., 12 ins. in the ground and in a mound of stone 3½ ft. base to brass cap mkd.

T11N R4E

S8	S9
S17	S16

1968

Deposit the original stone in mound alongside the corner.

From which I mark

A pine, 18 ins. in diam., bears N. 34° E., 199 lks. dist., mkd. T11N R4E S9 BT.

A pine, 14 ins. in diam., bears S. 50° E., 51 lks. dist., mkd. T11N R4E S16 BT.

The cor. is located on steep W. slope of hill 6 lks. dist. N. of Forest Bdy. brass cap No. 38, same as record. In pine and aspen growth.

At the ¼ sec. cor. of secs. 9 and 16, marked with a sandstone, 18x9x6 ins., firmly set and plainly mkd. ¼ on N. face, same as record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground and raise a mound of stone 3½ ft. base, 1½ ft. high to N. Brass cap mkd.

T11N R4E

¼	S9
S16	S16

1968

Deposit the original stone alongside the cor.

From which I mark

An aspen, 7 ins. in diam., bears S. 10° E., 57 lks. dist., mkd. ¼ S16 BT.

An aspen, 8 ins. in diam., bears N. 26° W., 46 lks. dist., mkd. ¼ S9 BT.

Remonumentation of Corners in T. 11 N., R. 4 E.

CHAINS

The cor. is located on NW. slope of hill in aspen and chokecherry growth.

At the cor. of secs. 4, 5, 8 and 9, marked with a quartzite stone, 17x10x7 ins., firmly set and plainly mkd. with 5 notches on the S. and 4 on the E. edge.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 10 ins. in the ground and in a mound of stone 3½ ft. base to brass cap mkd.

T11N R4E

S5 | S4
S8 | S9

1968

Deposit the original stone in mound alongside the corner.

From which I mark

An aspen, 6 ins. in diam., bears N. 75° W., 21 lks. dist., mkd. T11N R4E S5 BT.

No other trees available.

The cor. is located on E. slope of Saddle Creek approx. 20 chs. dist. W. of trail road in Saddle Creek Canyon that bears N. 30° E. and S. 30° W. In scattered aspen growth.

At the ¼ sec. cor. of secs. 4 and 9, marked with a granite stone, 18x11x5 ins., firmly set and plainly mkd. ¼ on N. face, same as record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 20 ins. in the ground and in a collar of stone to brass cap mkd.

T11N R4E

¼ — S4
S9

1968

Deposit the original stone alongside the cor.

From which I mark

A douglas fir, 10 ins. in diam., bears N. 24° E., 53 lks. dist., mkd. ¼ S4 BT.

A douglas fir, 10 ins. in diam., bears S. 47° W., 104 lks. dist., mkd. ¼ S9 BT.

Remonumentation of Corners in T. 11 N., R. 4 E.

CHAINS

The cor. is located on steep broken W. slope of hill overlooking Saddle Creek approx. 20 chs. dist. E. of trail road in Saddle Creek Canyon that bears N. 30° E. and S. 30° W. In scattered pine and mahogany growth.

At the cor. of secs. 19, 20, 29 and 30, marked with a quartzite stone, 26x9x7 ins., firmly set and plainly mkd. with 5 notches on the E. and 2 on the S. edge, same as record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 12 ins. in the ground and in a mound of stone 3½ ft. base to brass cap mkd.

T11N R4E
S19|S20
S30|S29
1968

Deposit the original stone in mound alongside the corner.

The cor. is located on gentle SE. slope of hill approx. 10 chs. dist. W. of trail road in narrow valley that bears N. and S. In chokecherry and scattered mahogany growth.

T. 11 N., R. 5 E.

Township 11 North, Range 5 East, Salt Lake Meridian, is located partially within the Cache National Forest. The subdivisional lines were surveyed by Andrew P. Hanson and Henry E. Giers in 1900.

At the cor. of secs. 16, 17, 20 and 21, marked with a sandstone, 18x9x6 ins., firmly set and plainly mkd. with 4 notches on the E. and 3 on the S. edge, same as record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground and raise a mound of stone 3½ ft. base, 1½ ft. high to W. Brass cap mkd.

T11N R5E
S17|S16
S20|S21
1968

Deposit the original stone alongside the cor.

The cor. is located on S. slope of hill 12 lks. dist. W. of 4 strand Forest Bdy. fence line that bears N. and S. 178 lks. dist. N. of dirt road in draw that drains E. In sagebrush growth.

Remonumentation of Corners in T. 11 N., R. 5 E.

CHAINS

At the cor. of secs. 17, 18, 19 and 20, marked with a sandstone, 18x9x6 ins., firmly set and plainly mkd. with 5 notches on the E. and 3 on the S. edge, same as record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 22 ins. in the ground and in a collar of stone to brass cap mkd.

T11N R5E

S18|S17

S19|S20

1968

Deposit the original stone alongside the cor.

From which I mark

A pine, 10 ins. in diam., bears N. 4° E., 30 lks. dist., mkd. T11N R5E S17 BT.

A pine, 8 ins. in diam., bears S. 45° E., 11 lks. dist., mkd. T11N R5E S20 BT.

A pine, 12 ins. in diam., bears S. 41° W., 29 lks. dist., mkd. T11N R5E S19 BT.

A pine 10 ins. in diam., bears N. 56° W., 33 lks. dist., mkd. T11N R5E S18 BT.

The cor. is located on gentle rolling E. slope of hill in thick pine growth.

At the ¼ sec. cor. of secs. 7 and 18, marked with a quartzite stone, 18x9x6 ins., firmly set and plainly mkd. ¼ on N. face, same as record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground and in a collar of stone to brass cap mkd.

T11N R5E

¼ — S7

S18

1968

Deposit the original stone alongside the cor.

From which I mark

An aspen, 8 ins. in diam., bears N. 29° E., 16 lks. dist., mkd. ¼ S7 BT.

An aspen, 6 ins. in diam., bears S. 12° W., 5 lks. dist., mkd. ¼ S18 BT.

448

Remonumentation of Corners in T. 11 N., R. 5 E.

CHAINS

The cor. is located on NE. slope of hill 250 lks. dist. E. of top of spur projecting N. In thick aspen, pine and chokecherry growth.

T. 12 N., R. 4 E.

Township 12 North, Range 4 East, Salt Lake Meridian, is located within the Cache National Forest. The township was surveyed by Andrew P. Hanson in 1896.

At the cor. of secs. 34. and 35, on the S. bdy. of the Tp., marked with a sandstone, 18x9x6 ins., firmly set and plainly mkd. with 4 notches on the W. and 2 on the E. edge, same as record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 22 ins. in the ground and in a collar of stone to brass cap mkd.

T12N R4E

S34|S35

S3

T11N R4E

1968

Deposit the original stone alongside the cor.

From which I mark

An aspen, 7 ins. in diam., bears N. 41° E., 53 lks. dist., mkd. T12N R4E S35 BT.

An aspen 8 ins. in diam., bears N. 12° W., 41 lks. dist., mkd. T12N R4E S34 BT.

The cor. is located on NW. slope of hill 8 lks. dist. S. of 4 strand Forest Bdy. fence line that bears E. and W. 150 lks. dist., E. of small draw that drains N. In dense aspen growth.

At the ½ sec. cor. of sec. 34, on the S. bdy. of the Tp., marked with a limestone, 16x10x6 ins., firmly set and plainly mkd. ½ on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground and raise a mound of stone 3½ ft. base 1½ ft. high to N. Brass cap mkd.

T12N R4E

½ S34

T11N R4E

1968

Deposit the original stone alongside the cor.

Remonumentation of Corners in T. 12 N., R. 4 E.

CHAINS

The cor. is located on steep NW. slope of hill 15 lks. dist. N. of 4 strand Forest Bdy. fence line that bears E. and W. approx. 10 chs. dist. E. of wash, 100 lks. wide, 3 ft. deep that drains S. about 15 chs. dist. E. of trail road that bears N. and S. In sagebrush growth.

At the closing cor. of secs. 1 and 2, on the N. bdy. of the Tp., marked with a quartzite stone, 18x14x10 ins., firmly set and plainly mkd. with 5 notches on the W. and 1 on the E. edge, CC on S. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 22 ins. in the ground and in a collar of stone to brass cap mkd.

T13N R4E

S35
—
S2|S1
C C

T12N R4E

1968

Deposit the original stone alongside the cor.

From which I mark

A pine, 18 ins. in diam., bears S. 31° E., 10 lks. dist., mkd. T12N R4E S1 BT.

A pine, 12 ins. in diam., bears S. 73° W., 29 lks. dist., mkd. T12N R4E S2 BT.

The cor. is located on SE. slope of hill in dense pine growth.

At the ½ sec. cor. of secs. 7 and 12, on the E. bdy. of the Tp., marked with a quartzite stone, 18x9x6 ins., firmly set and plainly mkd. ½ on W. face, same as record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 22 ins. in the ground and in a collar of stone to brass cap mkd.

T12N
R4E R5E

½
S12|S7

1963

Deposit the original stone alongside the cor.

The cor. is located in bottom of small draw that drains N. 80° E., with trail road in draw in 4 strand Forest Bdy. fence line that bears N. and S. In scattered aspen and pine growth.

Remonumentation of Corners in T. 12 N., R. 4 E.

CHAINS

At the $\frac{1}{2}$ sec. cor. of secs. 13 and 18, on the E. bdy. of the Tp., marked with a granite stone, 18x10x4 ins., firmly set and plainly mkd. $\frac{1}{2}$ on W. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 22 ins. in the ground and in a collar of stone to brass cap mkd.

T12N
R4E R5E
 $\frac{1}{2}$
S13|S18
1963

Deposit the original stone alongside the cor.

The cor. is located on steep NE. slope of hill approx. 6 chs. dist. N. of trail road that bears E. and W. about 5 chs. dist. S. of bottom of canyon that drains E. in 4 strand Forest Bdy. fence line that bears N. and S. In scattered aspen and pine growth.

At the cor. of secs. 13, 18, 19 and 24, on the E. bdy. of the Tp., marked with a quartzite stone, 18x9x8 ins., firmly set and plainly mkd. with 3 notches on the N. and S. edges, same as record.

No remaining evidence of the original bearing trees.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 20 ins. in the ground and in a collar of stone to brass cap mkd.

T12N
R4E R5E
S13|S18
S24|S19
1968

Deposit the original stone alongside the cor.

From which I mark

An aspen, 8 ins. in diam., bears N. 59° E., 69 lks. dist., mkd. T12N R5E S18 BT.

An aspen, 8 ins. in diam., bears S. 41° E., 39 lks. dist., mkd. T12N R5E S19 BT.

An aspen, 8 ins. in diam., bears S. 11° W., 44 lks. dist., mkd. T12N R4E S24 BT.

Remonumentation of Corners in T. 12 N., R. 4 E.

CHAINS

An aspen, 8 ins. in diam., bears N. 43° 30' W.,
27 lks. dist., mkd. T12N R4E S13 BT.

The cor. is located on NE. slope of hill in Forest Bdy.
fence line that bears N. and S. 3 chs. dist. S. of
bottom of draw that drains E. In pine and aspen growth.

At the $\frac{1}{2}$ sec. cor. of secs. 19 and 24, on the E. bdy.
of the Tp., marked with a quartzite stone, 18x9x6 ins.,
firmly set and plainly mkd. $\frac{1}{2}$ on W. face, same as record.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. in diam., 22
ins. in the ground and in a collar of stone to brass
cap mkd.

T12N
R4E R5E
 $\frac{1}{2}$
S24|S19
1958

Deposit the original stone alongside the cor.

From which I mark

An aspen, 10 ins. in diam., bears N. 40° 50' E.,
73 lks. dist., mkd. $\frac{1}{2}$ S19 BT.

A pine, 16 ins. in diam., bears N. 16° 30' W.,
73 lks. dist., mkd. $\frac{1}{2}$ S24 BT.

The cor. is located on top of small rise in 4 strand
Forest Bdy. fence line that bears N. and S. In dense
aspen and pine growth.

At the $\frac{1}{2}$ sec. cor. of secs. 25 and 30, on the E. bdy.
of the Tp., marked with a sandstone, 17x9x6 ins.,
firmly set and plainly mkd. $\frac{1}{2}$ on W. face, same as
record.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. in diam., 20
ins. in the ground and in a collar of stone to brass
cap mkd.

T12N
R4E R5E
 $\frac{1}{2}$
S25|S30
1968

Deposit the original stone alongside the cor.

The cor. is located on top of spur projecting S. 50° E.
in 4 strand Forest Bdy. fence line that bears N. and S.
220 lks. dist. N. of trail road that bears E. and W. In
scattered aspen growth.

152

Re-mentation of Corners in T. 12 N., R. 4 E.

CHAINS

At the cor. of secs. 25, 30, 31 and 36, on the E. bdy. of the Tp., marked with a sandstone, 17x7x6 ins., firmly set and plainly mkd. with 5 notches on the N. and 1 on the S. edge, same as record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 22 ins. in the ground and in a collar of stone to brass cap mkd.

T12N
R4E R5E
S25|S30
S36|S31
1968

Deposit the original stone alongside the cor.

The cor. is located on NE. slope of hill 6 lks. dist. S. of cor. of 4 strand fence line that bears N., S. and W. In scattered aspen growth.

At the cor. of secs. 1, 2, 11 and 12, marked with a quartzite stone, 18x9x7 ins., firmly set and plainly mkd. with 5 notches on the S. and 1 on the E. edge, same as record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 22 ins. in the ground and in a collar of stone to brass cap mkd.

T12N R4E
S2|S1
S11|S12
1968

Deposit the original stone alongside the corner.

From which I mark

A pine, 8 ins. in diam., bears N. 56° E., 27 lks. dist., mkd. T12N R4E S1 BT.

A pine, 12 ins. in diam., bears S. 31° E., 24 lks. dist., mkd. T12N R4E S12 BT.

A pine, 10 ins. in diam., bears S. 67° W., 17 lks. dist., mkd. T12N R4E S11 BT.

A pine, 12 ins. in diam., bears N. 83° W., 9 lks. dist., mkd. T12N R4E S2 BT.

The cor. is located on NE. slope of hill 4 chs. dist. W. of trail road in draw that bears N. and S. In dense pine growth.

Remonumentation of Corners in T. 12 N., R. 4 E.

CHAINS

At the $\frac{1}{2}$ sec. cor. of secs. 1 and 2, marked with a quartzite stone, 15x10x6 ins., firmly set and plainly mkd. $\frac{1}{2}$ on W. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins. in the ground and raise a mound of stone $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high to W. Brass cap mkd.

T12N R4E

$\frac{1}{2}$
S2|S1

1968

Deposit the original stone alongside the cor.

The cor. is located on W. side of grassy flat about 5 chs. dist. N. of trail road that bears N. 45° E. and S. 45° W. approx. 9 chs. dist. S. of timber line that bears E. and W.

T. 13 N., R. 1 E.

Township 13 North, Range 1 East, Salt Lake Meridian, is located partially within the Cache National Forest. Surveyed by A. J. Stewart in 1876.

At the $\frac{1}{2}$ sec. cor. of secs. 19 and 24, on the E. bdy. of the Tp., marked with a quartzite boulder, 14x10x6 ft. above the ground, mkd. $\frac{1}{2}$ on W. face with an X above the $\frac{1}{2}$. Same as record.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 12 ins. in the ground on W. edge of original cor., and in a mound of stone $3\frac{1}{2}$ ft. base to brass cap mkd.

T13N
R1E R2E

$\frac{1}{2}$
S24|S19

1968

The cor. is located on steep S. slope of hill 4 lks. dist. E. of 4 strand Forest Bdy. fence line that bears N. and S. 3 chs. dist. N. of trail road in Birch Creek Canyon that bears E. and W. No timber.

T. 13 N., R. 4 E.

Township 13 North, Range 4 East, Salt Lake Meridian, is located within the Cache National Forest. The township was surveyed by Andrew P. Hanson and Henry E. Giers in 1900.

Remonumentation of Corners in T. 13 N., R. 4 E.

CHADDS

At the standard cor. of secs. 31 and 36, (Third Standard Parallel North), marked with a sandstone, 20x8x6 ins., firmly set and plainly mkd. with 6 notches on the N., E. and W. edges, SC on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 14 ins. in the ground and in a mound of stone 3½ ft. base to brass cap mkd.

SC
T13N
R4E R5E
S36|S31
S1
T12N R4E
1968

Deposit the original stone in mound alongside the corner.

The cor. is located on the SW. rim of hilltop 8 lks. dist. W. of the cor. of 4 strand Forest Bdy. fence line that bears N. and S. 47° 30' E. In sagebrush growth.

At the standard cor. of secs. 35 and 36, on the S. bdy. of the Tp., (Third Standard Parallel North), marked with a quartzite stone, 15x9x6 ins., firmly set and plainly mkd. with 5 notches on the W. and 1 on the E. edge, SC on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground and raise a mound of stone 3½ ft. base, 1½ ft. high to N. Brass cap mkd.

SC
T13N R4E
S35|S36
S2
T12N R4E
1968

Deposit the original stone alongside the cor.

The cor. is located on E. slope of small clearing in scattered aspen growth.

At the standard ¼ sec. cor. of sec. 35 (Third Standard Parallel North), marked with a quartzite stone, 18x11x6 ins., firmly set and plainly mkd. ¼ SC on N. face, same as record.

At the cor. point

. Remonumentation of Corners in T. 13 N., R. 4 E.

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 20 ins. in the ground and in a collar of stone to brass cap mkd.

SC
T13N R4E

$\frac{1}{4}$ S35

T12N R4E

1968

Deposit the original stone alongside the cor.

From which I mark

A pine, 20 ins. in diam., bears N. 34° W., 34 lks. dist., mkd. SC $\frac{1}{4}$ S35 BT.

The cor. is located at head of small draw that drains S. approx. 7 chs. dist. W. of trail road that bears N. 50° W. and S. 50° E. In dense pine growth.

At the cor. of secs. 25, 30, 31 and 36, on the E. bdy. of the Tp., marked with a sandstone, 18x9x6 ins., firmly set and plainly mkd. with 5 notches on the N. and 1 on the S. edge, same as record.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 22 ins. in the ground and in a collar of stone to brass cap mkd.

T13N
R4E R5E

S25 | S30
S36 | S31

1968

Deposit the original stone alongside the cor.

The cor. is located on gentle E. slope of hill in 4 strand Forest Bdy. fence line that bears N. and S. In scattered aspen growth.

At the cor. of secs. 15, 16, 21 and 22, marked with a quartzite stone, 24x14x12 ins., firmly set and plainly mkd. with 3 notches on the S. and E. edges.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 22 ins. in the ground and in a mound of stone to brass cap mkd.

Remonumentation of Corners in T. 13 N., R. 4 E.

CHAINS

T13N R4E

S16	S15
S21	S22

1968

Deposit the original stone alongside the cor.

From which I mark

A spruce, 12 ins. in diam., bears N. 51° E., 19 lks. dist., mkd. T13N R4E S15 BT.

A spruce, 18 ins. in diam., bears S. 20° 40' E., 77 lks. dist., mkd. T13N R4E S22 BT.

A spruce, 16 ins. in diam., bears S. 69° 30' W., 9 lks. dist., mkd. T13N R4E S21 BT.

A spruce, 15 ins. in diam., bears N. 13° W., 40 lks. dist., mkd. T13N R4E S16 BT.

From which

The SW. corner of Forest Service Cabin, bears S. 28° 30' E., 682 lks. dist.

The cor. is located on nearly level land 330 lks. dist. N. of trail road that bears E. and W. In dense pine growth.

At the cor. of secs. 9, 10, 15 and 16, marked with a quartzite stone, 17x10x6 ins., firmly set and plainly mkd. with 4 notches on the S. and 3 on the E. edge, same as record.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground and raise a mound of stone 3½ ft. base 1½ ft. high to W. Brass cap mkd.

T13N R4E

S9	S10
S16	S15

1968

Deposit the original stone alongside the cor.

From which I mark

A pine, 12 ins. in diam., bears N. 80° E., 73 lks. dist., mkd. T13N R4E S10 BT.

A pine, 16 ins. in diam., bears S. 78° E., 45 lks. dist., mkd. T13N R4E S15 BT.

A pine, 8 ins. in diam., bears S. 30° W., 54 lks. dist., mkd. T13N R4E S16 BT.

A pine, 8 ins. in diam., bears N. 52° W., 43 lks. dist., mkd. T13N R4E S9 BT.

Re monumentation of Corners in T. 13 N., R. 4 E.

CRASH

The cor. is located on gentle NE. slope 229 lks. dist. S. of trail road that bears S. 70° E. and N. 70° W. In dense pine and aspen growth.

T. 14 N., R. 2 E.

Township 14 North, Range 2 East, Salt Lake Meridian, is located partially within the Cache National Forest. Surveyed by Andrew P. Hanson in 1896.

At the cor. of secs. 5, 6, 31 and 32, on the S. bdy. of the Tp., marked with a limestone, 18x10x6 ins., firmly set and plainly mkd. with 5 notches on the E. and 1 on the W. edge.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 10 ins. in the ground and in a mound of stone 3½ ft. base to brass cap mkd.

T14N R2E

S31	S32
S6	S5

T13N R2E

1968

Deposit the original stone in mound alongside the corner.

The cor. is located on steep NW. slope of hill 6 lks. dist. N. of Forest Bdy. brass cap No. 82 (same as record) 650 lks. dist. S. of trail road in City Creek Canyon that bears E. and W. In scattered pine, aspen and mahogany growth.

At the cor. of secs. 19, 20, 29 and 30, marked with a sandstone, 18x9x7 ins., firmly set and plainly mkd. with 5 notches on the E. and 2 on the S. edge.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 14 ins. in the ground and in a mound of stone 3½ ft. base to brass cap mkd.

T14N R2E

S19	S20
S30	S29

1968

Remonumentation of Corners in T. 13 N., R. 4 E.

CHAINS

Deposit the original stone in mound alongside the corner.

The cor. is located on barren S. slope of hill approx. 35 chs. dist. N. of Cherry Creek that drains W. in old fence line that bears N. and S. No timber.

At the cor. of secs. 5, 6, 7 and 8, marked with a sandstone, 18x8x5 ins., firmly set and plainly mkd. with 5 notches on the S. and E. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 14 ins. in the ground and in a mound of stone 3½ ft. base to brass cap mkd.

T14N R2E

S6	S5
S7	S8

1968

Deposit the original stone in mound alongside the corner.

The cor. is located on S. slope of ridge that bears N. 70° E. and S. 70° W. at the cor. of old net wire fence line that bears N., S. and E. approx. 6 chs. dist. N. of improved dirt road in High Creek Canyon that bears N. 70° E. and S. 70° W. In sagebrush growth.

At the cor. of secs. 4, 5, 8 and 9, marked with a quartzite stone, 17x7x6 ins., firmly set and plainly mkd. with 5 notches on the S. and 4 on the E. edge.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 15 ins. in the ground and in a mound of stone 3½ ft. base to brass cap mkd.

T14N R2E

S5	S4
S8	S9

1968

Deposit the original stone in mound alongside the corner.

The cor. is located on steep N. slope of hill 5 chs. dist. S. of High Creek, 60 lks. wide, 2 ft. deep, that drains W. No timber.

Remonumentation of Corners in T. 14 N., R. 3 E.

CHAINS

T. 14 N., R. 3 E.

Township 14 North, Range 3 East, Salt Lake Meridian, is located within the Cache National Forest. Surveyed by J. H. Martineau in 1881.

At the cor. of secs. 2, 3, 34 and 35, on the N. bdy. of the Tp., marked with a limestone, 35x30x8 ins., firmly set and plainly mkd. with 4 notches on the W. and 2 on the E. edge.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 10 ins. in the ground and in a mound of stone 3½ ft. base to brass cap mkd.

T15N R3E

S34|S35

S3|S2

T14N R3E

1968

Deposit the original stone in mound alongside the corner.

From which I mark

A pine, 12 ins. in diam., bears N. 34° 30' E., 87 lks. dist., mkd. T15N R3E S35 BT.

A pine, 24 ins. in diam., bears S. 50° W., 65 lks. dist., mkd. T14N R3E S3 BT.

The cor. is located on E. slope of ridge that bears N. and S., approx. 6 chs. dist. E. of top. In scattered aspen and pine growth.

At the ¼ sec. cor. of secs. 2 and 3, marked with a limestone, 32x24x6 ins., firmly set and plainly mkd. ¼ on W. face, same as record.

At the corner point

Set an iron post, 30 ins. long, 2½ ins. in diam., 10 ins. in the ground and in a mound of stone 3½ ft. base to brass cap mkd.

T14N R3E

¼

S3|S2

1968

Remonumentation of Corners in T. 14 N., R. 3 E.

CHAINS

Deposit the original stone in mound alongside the corner.

From which I mark

A pine, 24 ins. in diam., bears S. 2° E., 23 lks. dist., mkd. $\frac{1}{2}$ S2 BT.

A pine, 24 ins. in diam., bears N. 7° 30' W., 22 lks. dist., mkd. $\frac{1}{2}$ S3 BT.

The cor. is located on SW. slope of hill approx. 8 chs. dist. E. of small sagebrush flat. In dense pine growth.

At the $\frac{1}{2}$ sec. cor. of secs. 9 and 10, marked with a sandstone, 24x16x6 ins., firmly set and plainly mkd. $\frac{1}{2}$ on W. face, same as record.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. in diam., 16 ins. in the ground and in a mound of stone 3 $\frac{1}{2}$ ft. base to brass cap mkd.

T14N R3E

$\frac{1}{2}$

S9|S10

1968

Deposit the original stone in mound alongside the corner.

From which I mark

An aspen, 7 ins. in diam., bears S. 31° E., 7 lks. dist., mkd. $\frac{1}{2}$ S10 BT.

An aspen, 8 ins. in diam., bears N. 24° 30' W., 16 lks. dist., mkd. $\frac{1}{2}$ S9 BT.

The cor. is located 100 lks. dist. N. of top of spur that projects S. 35° E. In scattered aspen growth.

T. 14 N., R. 4 E.

Township 14 North, Range 4 East, Salt Lake Meridian, is located within the Cache National Forest. Surveyed by J. H. Martineau in 1881.

Remonumentation of Corners in T. 14 N., R. 4 E.

CHAINS

At the $\frac{1}{4}$ sec. cor. of sec. 1, marked with a limestone, 18x8x6 ins., firmly set and plainly mkd. $\frac{1}{4}$ on W. face, same as record.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 12 ins. in the ground and in a mound of stone $3\frac{1}{2}$ ft. base to brass cap mkd.

T14N
R4E R5E
 $\frac{1}{4}$
S1 |
1968

Deposit the original stone in mound alongside the corner.

The cor. is located on steep E. slope of mountain 25 lks. dist. W. of old Forest Bdy. fence line that bears N. and S. In scattered mahogany growth.

At the $\frac{1}{4}$ sec. cor. of sec. 24, on the E. bdy. of the Tp., marked with a limestone, 18x11x5 ins., firmly set and plainly mkd. $\frac{1}{4}$ on W. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 18 ins. in the ground and in a collar of stone to brass cap mkd.

T14N
R4E R5E
 $\frac{1}{4}$
S24 |
1968

Deposit the original stone alongside the cor.

From which I mark

A pine, 10 ins. in diam., bears S. 55° W., 30 lks. dist., mkd. $\frac{1}{4}$ S24 BT.

The cor. is located on steep NW. slope of canyon 250 lks. dist. S. of bottom of canyon that drains N. 60° E. 6 lks. dist. E. of 4 strand Forest Bdy. fence line that bears N. and S. In dense pine growth.

At the $\frac{1}{4}$ sec. cor. of sec. 25, on the E. bdy. of the Tp., marked with a quartzite stone, 18x10x7 ins., firmly set and plainly mkd. $\frac{1}{4}$ on W. face, same as record.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 22 ins. in the ground and in a collar of stone to brass cap mkd.

Remonumentation of Corners in T. 14 N., R. 4 E.

CHAINS

T14N
R4E R5E
 $\frac{1}{2}$
S25|
1968

Deposit the original stone alongside the cor.

The cor. is located on NW. slope of hill about 5 chs. dist. N. of Hwy. 89, that bears E. and W. in old delapidated fence line that bears N. and S. In scattered aspen growth.

At the $\frac{1}{2}$ sec. cor. of sec. 34, on the S. bdy. of the Tp., marked with a limestone, 18x12x6 ins., firmly set and plainly mkd. $\frac{1}{2}$ on N. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 20 ins. in the ground and in a collar of stone to brass cap. Raise a mound of stone $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high to N. Brass cap mkd.

T14N R4E
 $\frac{1}{2}$ S34
T13N R4E
1968

Deposit the original stone alongside the cor.

The cor. is located in small draw that drains S. 20° W., into large grassy flat, 10 chs. dist. approx. 5 chs. dist N. of trail road that bears E. and W. No timber.

At the cor. of secs. 33 and 34, on the S. bdy. of the Tp. marked with a limestone, 16x14x4 ins., firmly set and plainly mkd. with 3 notches on the E. and W. edges.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 15 ins. in the ground and in a mound of stone 3 ft. base to brass cap mkd.

T14N R4E
S33|S34
S3
T13N R4E
1968

Deposit the original stone in mound alongside the corner.

The cor. is located on top of spur projecting S. 50° E., 6 lks. dist. W. of Forest Bdy. brass cap No. 67, same as record. 100 lks. dist. N. of old trail road that bears S. 50° E. and N. 50° W. In very scattered pine growth.

Remonumentation of Corners in T. 14 N., R. 4 E.

CHAINS

At the $\frac{1}{2}$ sec. cor. of sec. 33, on the S. bdy. of the Tp., marked with a limestone, 20x12x6 ins., firmly set and plainly mkd. $\frac{1}{2}$ on N. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 15 ins. in the ground and in a mound of stone $3\frac{1}{2}$ ft. base to brass cap mkd.

T14N R4E

$\frac{1}{2}$ S33

T13N R4E

1968

Deposit the original stone in mound alongside the corner.

The cor. is located on top of ridge that bears S. 45° E. and N. 45° W. approx. 12 chs. dist. N. of trail road that bears E. and W. In scattered aspen and pine growth.

At the cor. of secs. 32 and 33, on the S. bdy. of the Tp., marked with a limestone, 18x10x4 ins., firmly set and plainly mkd. with 4 notches on the E. and 2 on the W. edge, same as record.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 22 ins. in the ground and in a collar of stone to brass cap mkd.

T14N R4E

S32|S33

S4

T13N R4E

1968

Deposit the original stone alongside the cor.

From which I mark

A spruce, 18 ins. in diam., bears N. $48^\circ 30'$ E., 43 lks. dist., mkd. T14N R4E S33 BT.

A spruce, 14 ins. in diam., bears N. 57° W., $33\frac{1}{2}$ lks. dist., mkd. T14N R4E S32 BT.

The cor. is located on N. slope of hill 6 lks. dist. W. of Forest Bdy. brass cap No. 68, same as record approx. 10 chs. dist. S. of bottom of draw that drains E. In dense pine and aspen growth.

At the cor. of secs. 31 and 32, on the S. bdy. of the Tp., marked with a limestone, 16x10x6 ins., firmly set and plainly mkd. with 5 notches on the E. and 1 on the W. edge, same as record.

AGA

Remonumentation of Corners in T. 14 N., R. 4 E.

CHAINS

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 20 ins. in the ground and in a collar of stone to brass cap mkd.

T14N R4E

S31|S32

S5

T13N R4E

1968

Deposit the original stone alongside the cor.

The cor. is located on gentle E. slope of hill 6 lks. dist. W. of Forest Bdy. brass cap No. 69, same as record 235 lks. dist. W. of trail road that bears N. and S. In sagebrush growth, no timber.

At the $\frac{1}{2}$ sec. cor. of secs. 16 and 21, marked with a sandstone, 16x10x4 ins., firmly set and plainly mkd. $\frac{1}{2}$ on the N. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 10 ins. in the ground and in a mound of stone $3\frac{1}{2}$ ft. base to brass cap mkd.

T14N R4E

$\frac{1}{2}$ S16

S21

1968

Deposit the original stone in mound alongside the corner.

The cor. is located on W. slope of ridge that bears N. and S. approx. 8 chs. dist. S. of Hwy. 89, that bears S. 60° E. and N. 60° W. In sagebrush growth.

At the $\frac{1}{2}$ sec. cor. of secs. 8 and 17, marked with a sandstone, 24x14x10 ins., firmly set and plainly mkd. $\frac{1}{2}$ on N. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 20 ins. in the ground and in a collar of stone to brass cap mkd.

T14N R4E

$\frac{1}{2}$ S8

S17

1968

Deposit the original stone alongside the cor.

From which I mark

Remonumentation of Corners in T. 14 N., R. 4 E.

CHAINS

A pine, 16 ins. in diam., bears S. 11° W., 42 lks. dist., mkd. $\frac{1}{2}$ S17 BT.

A pine, 12 ins. in diam., bears N. 60° W., 10 lks. dist., mkd. $\frac{1}{2}$ S8 BT.

The cor. is located on steep W. slope of hill approx. 30 chs. dist. E. of Hwy. 89 that bears S. 45° E. and N. 45° W. on turn. In scattered aspen and pine growth.

At the $\frac{1}{2}$ sec. cor. of secs. 7 and 8, marked with a quartzite stone, 16x7x6 ins., firmly set and plainly mkd. $\frac{1}{2}$ on the W. face.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. in diam., 18 ins. in the ground and in a collar of stone to brass cap mkd.

T14N R4E

$\frac{1}{2}$
S7|S8

1968

Deposit the original stone alongside the cor.

The cor. is located on gentle SW. slope of large sagebrush flat, no timber.

T. 14 N., R. 5 E.

Township 14 North, Range 5 East, Salt Lake Meridian, is located along the E. bdy. of the Cache National Forest. Surveyed by Andrew P. Hanson in 1896.

At the closing cor. of secs. 19 and 30, on the W. bdy. of the Tp., marked with a limestone, 18x9x6 ins., firmly set and plainly mkd. with 4 notches on the N. and 2 on the S. edge, CC on E. face, same as record.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. in diam., 12 ins. in the ground and in a mound of stone 3 $\frac{1}{2}$ ft. base to brass cap mkd.

T14N

R4E R5E

S25 | $\frac{S19}{S30}$ CC

1968

Deposit the original stone in mound alongside the corner.

The cor. is located on NW. slope of spur projecting N. 40° E. in old Forest Bdy. fence line that bears N. and S. In sagebrush growth.

Remonumentation of Corners in T. 14 N., R. 4 E.

CHAINS

At the cor. of secs. 19, 20, 29 and 30, marked with a limestone, 18x11x10 ins., firmly set and plainly mkd. with 5 notches on the E. and 2 on the S. edge.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 18 ins. in the ground and in a collar of stone to brass cap mkd.

T14N R5E

S19	S20
S30	S29

1968

Deposit the original stone alongside the cor.

The cor. is located on top of spur projecting N. 30° E. in 4 strand fence line that bears N. and S. In sagebrush growth.

CERTIFICATE OF SURVEY

Ferrel D. Reynolds, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 15th day of February, 1961, these monumented corners in the following listed townships:

- Tps. 11 and 13 N., R. 1 E.
T. 14 N., R. 2 E.
Tps. 10, 11 and 14 N., R. 3 E.
Tps. 11, 12, 13 and 14 N., R. 4 E.
Tps. 11 and 14 N., R. 5 E.
Tps. 5, 8, 9 and 10 N., R. 1 W.
T. 12 N., R. 2 W.

of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

May 1, 1969 (Date)

Ferrel D. Reynolds (Signature) Surveying Technician

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

RECEIVED FOR APPROVAL SEP 1969

BUREAU OF LAND MANAGEMENT, Washington, D. C.

The foregoing field notes of the monumentation of corners in:

- Tps. 11 and 13 N., R. 1 E., Salt Lake Meridian, Utah
T. 14 N., R. 2 E., " " " "
Tps. 10, 11 and 14 N., R. 3 E., Salt Lake Meridian, Utah
Tps. 11, 12, 13 and 14 N., R. 4 E., Salt Lake Meridian, Utah
Tps. 11 and 14 N., R. 5 E., " " " "
Tps. 5, 8, 9 and 10 N., R. 1 W., " " " "
T. 12 N., R. 2 W., " " " "

executed by Ferrel D. Reynolds, Surveying Technician

having been critically examined and found correct, are hereby approved.

(Date)

Clark T. Gamm (Signature) Chief, Division of Engineering

CERTIFICATE OF TRANSCRIPT

I, Clark T. Gamm, Chief, Division of Engineering, certify that the foregoing transcript of the field notes of the above described surveys is a true copy of the original field notes.

(Signature) Chief, Division of Engineering

Blank

Page

Blank

Page

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

471

ORIGINAL
FIELD NOTES

OF THE

REMONUMENTATION OF CORNERS

IN

TOWNSHIP 1 NORTH, RANGE 6 WEST, UINTAH MERIDIAN

TOWNSHIP 1 NORTH, RANGE 8 WEST, " "

TOWNSHIP 1 NORTH, RANGE 9 WEST, " "

TOWNSHIP 2 NORTH, RANGE 1 EAST, " "

TOWNSHIP 2 NORTH, RANGE 1 WEST, " "

TOWNSHIP 2 NORTH, RANGE 4 WEST, " "

TOWNSHIP 2 NORTH, RANGE 5 WEST, " "

TOWNSHIP 2 NORTH, RANGE 6 WEST, " "

TOWNSHIP 2 NORTH, RANGE 9 WEST, " "

TOWNSHIP 2 NORTH, RANGE 19 EAST, SALT LAKE MERIDIAN

TOWNSHIP 3 NORTH, RANGE 19 EAST, " " "

Of the SALT LAKE AND UINTAH Meridians

In the State of UTAH

EXECUTED BY

FERREL D. REYNOLDS

SURVEYING TECHNICIAN

Under special instructions dated FEBRUARY 15, 19 61, which provided for the surveys included under Group Number 447, UTAH, approved FEBRUARY 16, 1961, and assignment instructions dated MAY 26, 19 69.

Survey commenced AUGUST 28, 19 68

Survey completed SEPTEMBER 19, 19 68

672

INDEX DIAGRAM


Township _____, Range _____,

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

CORNER REMONUMENTATION

INDEX DIAGRAM

Township 1 NORTH , Range 6 WEST , UINTAH Meridian

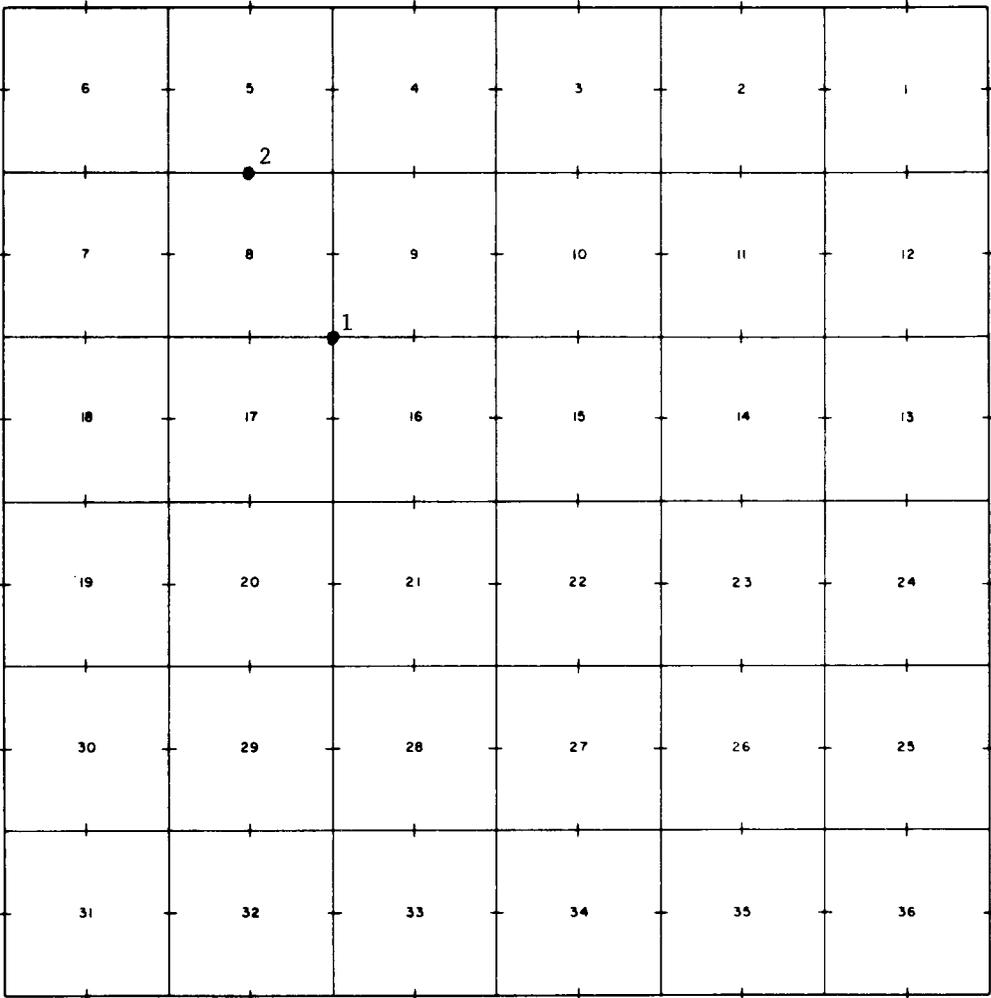


Blank

Page

CORNER REMONUMENTATION

INDEX DIAGRAM

Township 1 NORTH , Range 8 WEST , UINTAH Meridian

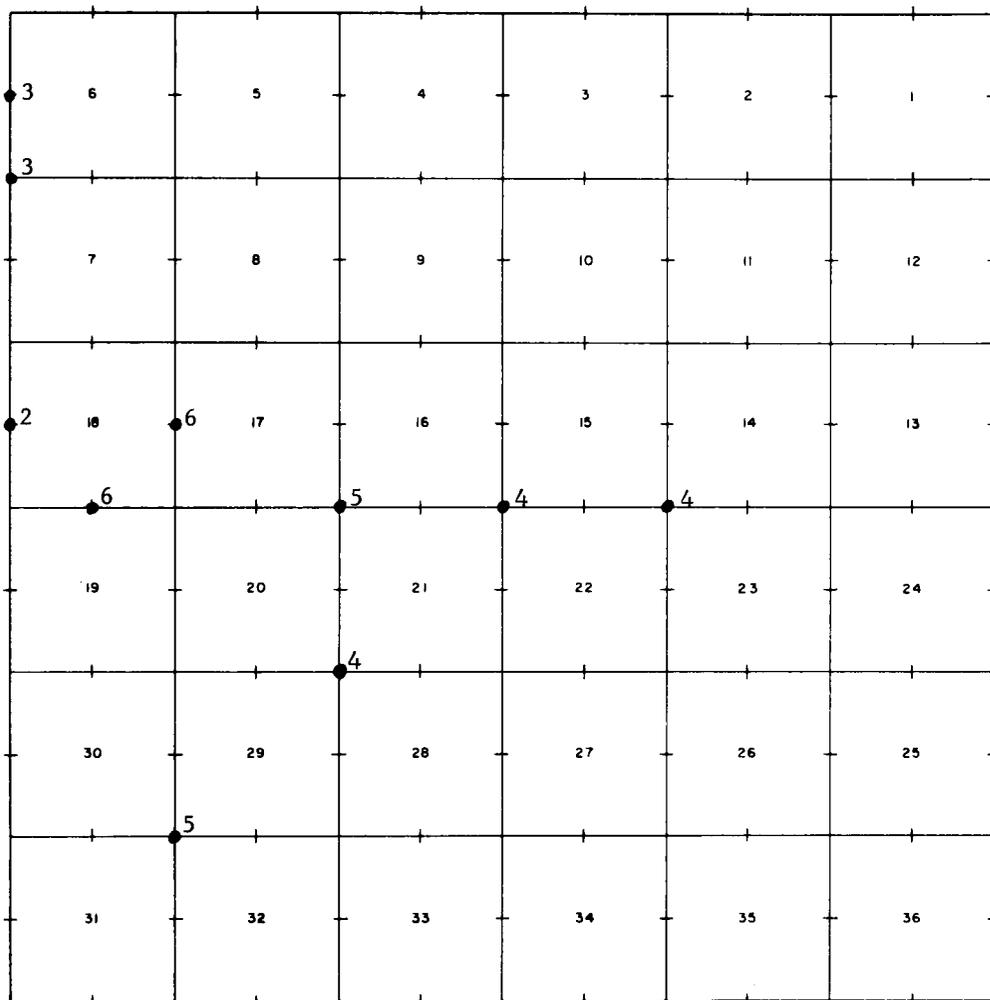


Blank

Page

CORNER REMONUMENTATION

INDEX DIAGRAM

Township 1 NORTH , Range 9 WEST , UINTAH Meridian

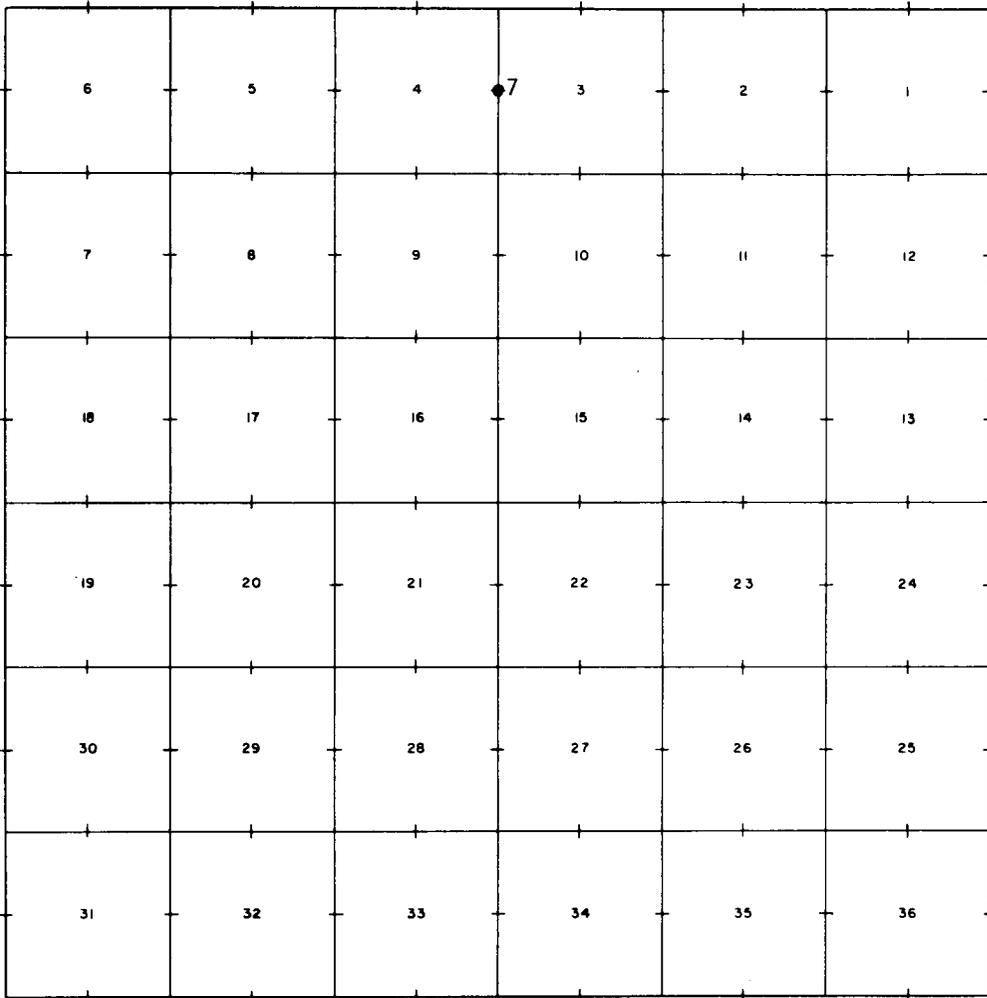


Blank

Page

CORNER REMONUMENTATION

INDEX DIAGRAM

Township 2 NORTH , Range 1 EAST , UINTAH Meridian

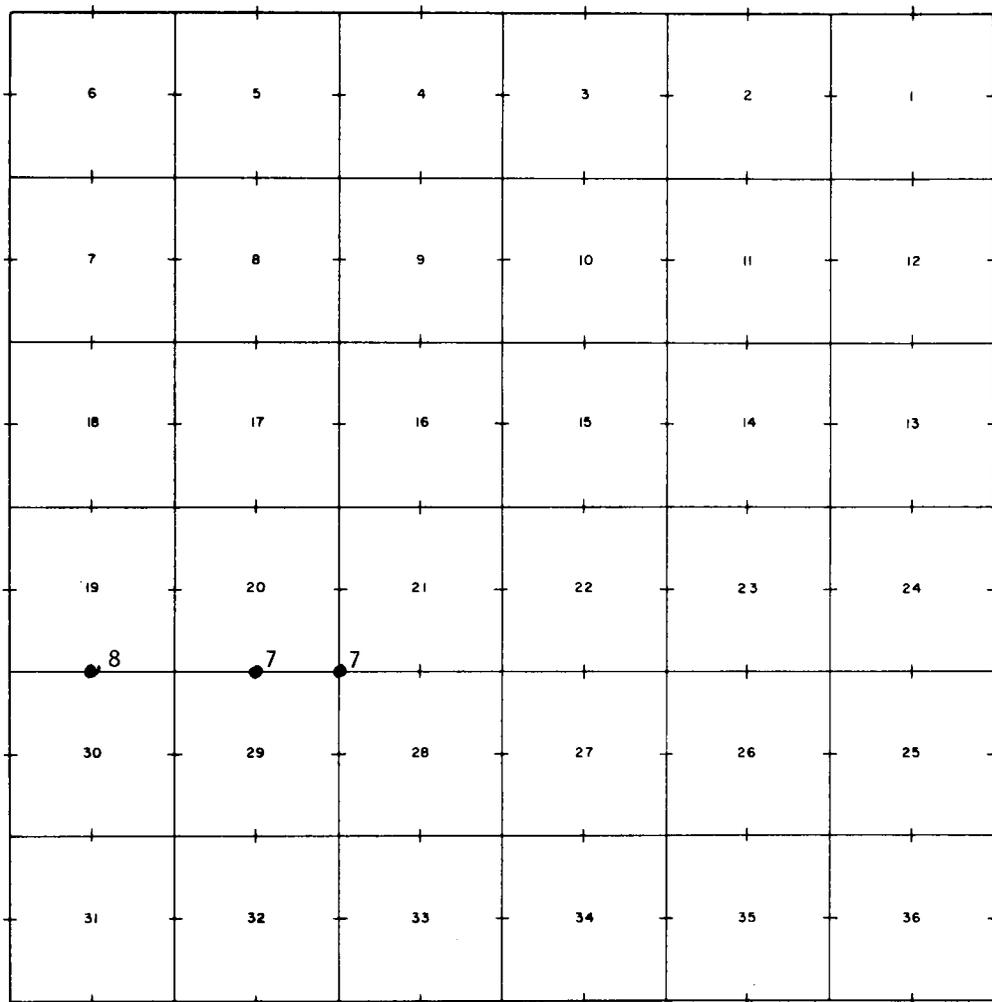


Blank

Page

CORNER REMONUMENTATION

INDEX DIAGRAM

Township 2 NORTH , Range 1 WEST , UINTAH Meridian

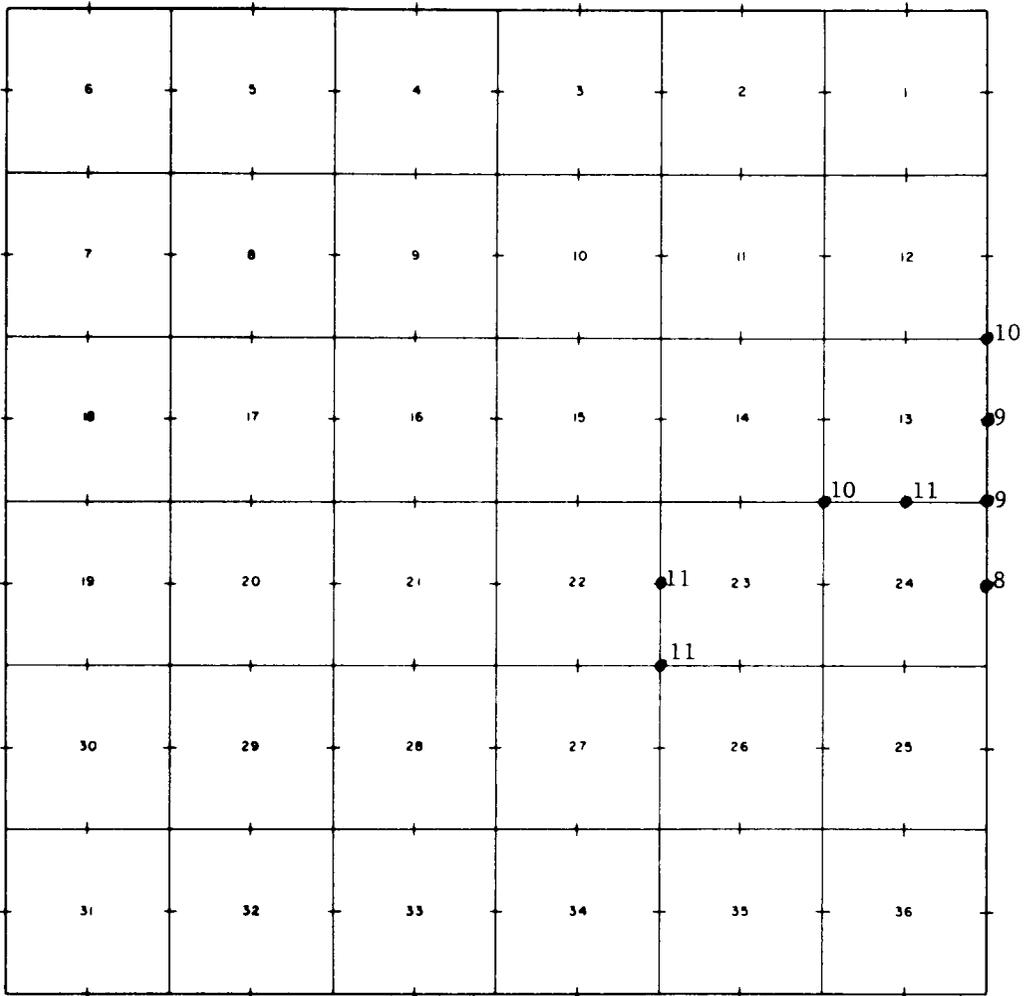


Blank

Page

CORNER REMONUMENTATION

INDEX DIAGRAM

Township 2 NORTH , Range 4 WEST , UINTAH Meridian

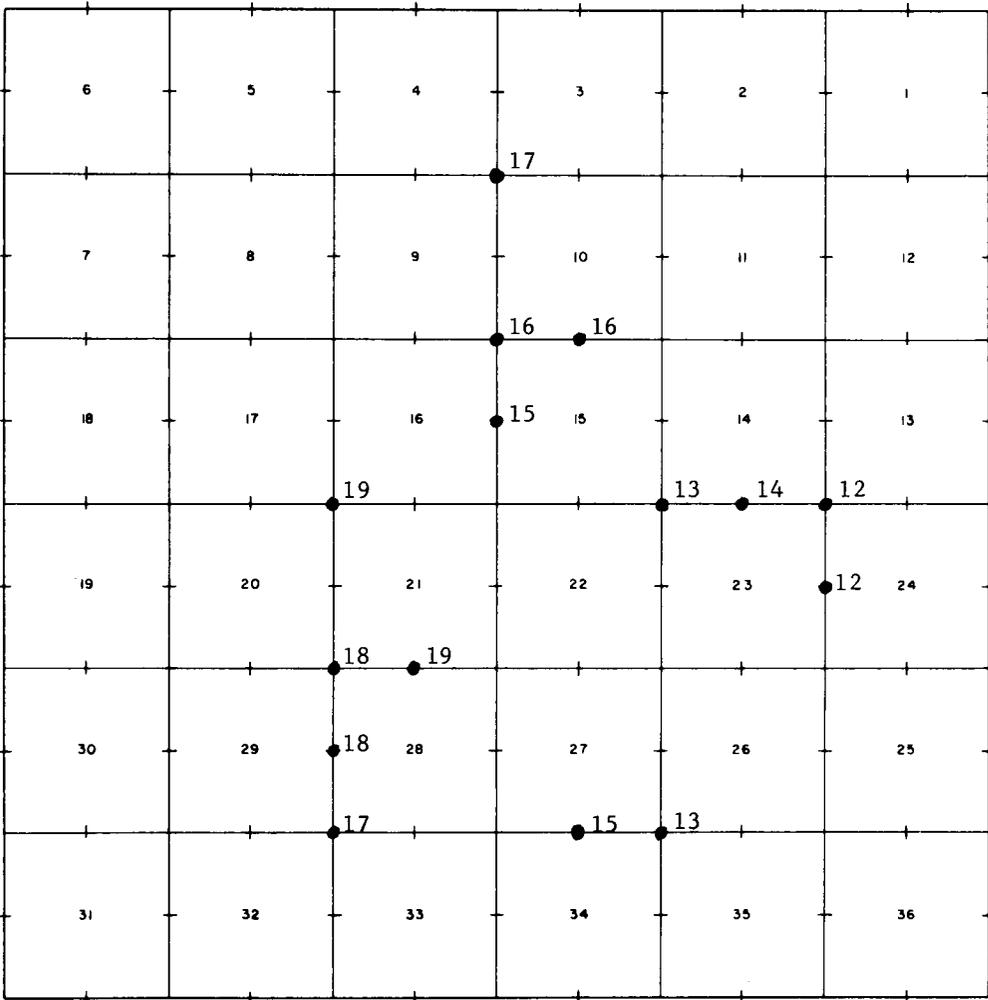


Blank

Page

CORNER REMONUMENTATION

INDEX DIAGRAM

Township 2 NORTH , Range 5 WEST , UINTAH Meridian

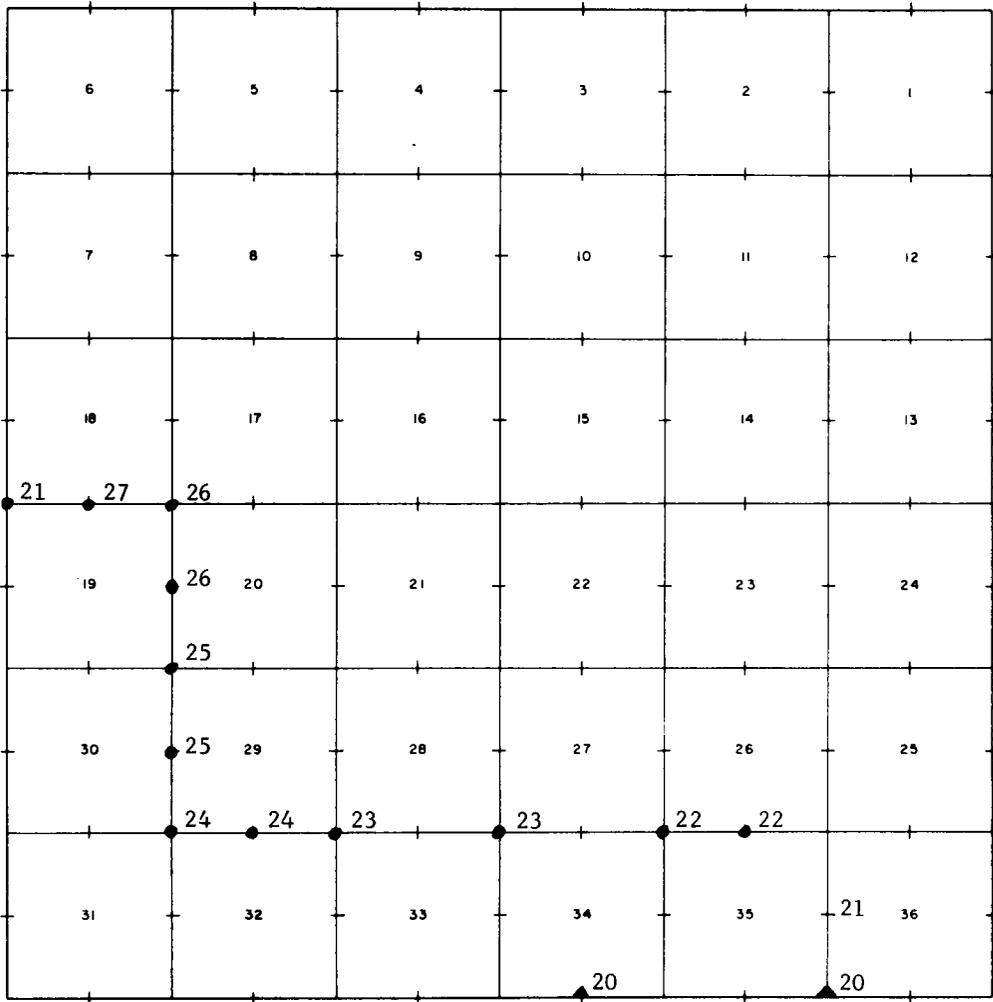


Blank

Page

CORNER REMONUMENTATION

INDEX DIAGRAM

Township 2 NORTH , Range 6 WEST , UINTAH Meridian

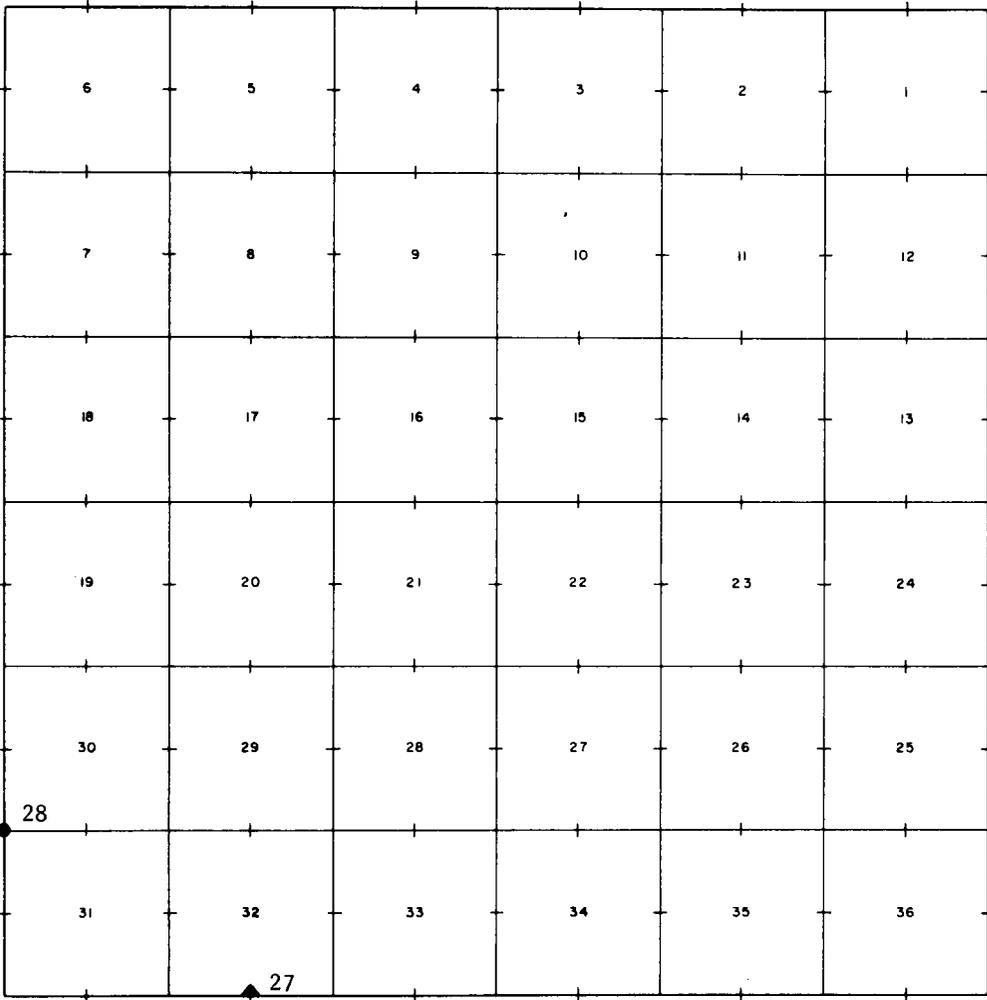


Blank

Page

CORNER REMONUMENTATION

INDEX DIAGRAM

Township 2 NORTH , Range 9 WEST , UINTAH Meridian

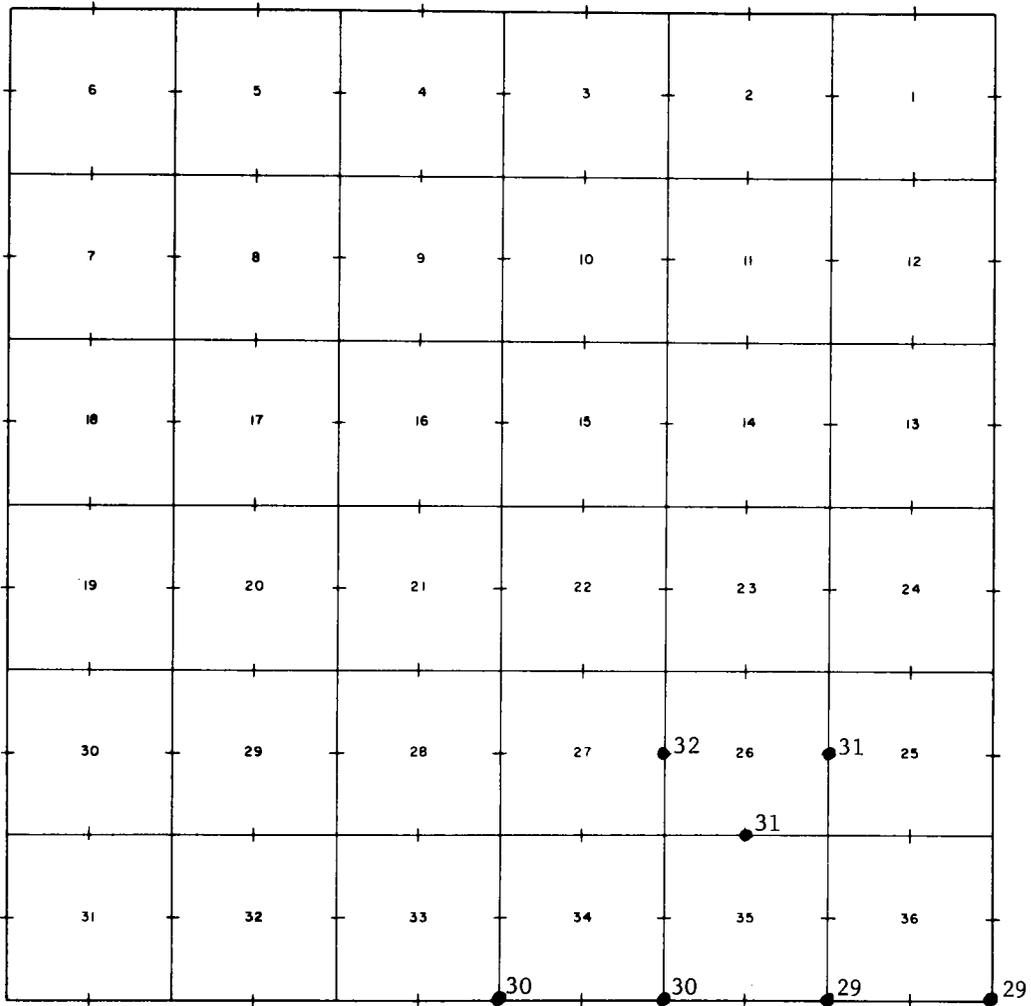


Blank

Page

CORNER REMONUMENTATION

INDEX DIAGRAM

Township 2 NORTH , Range 19 EAST , SALT LAKE Meridian

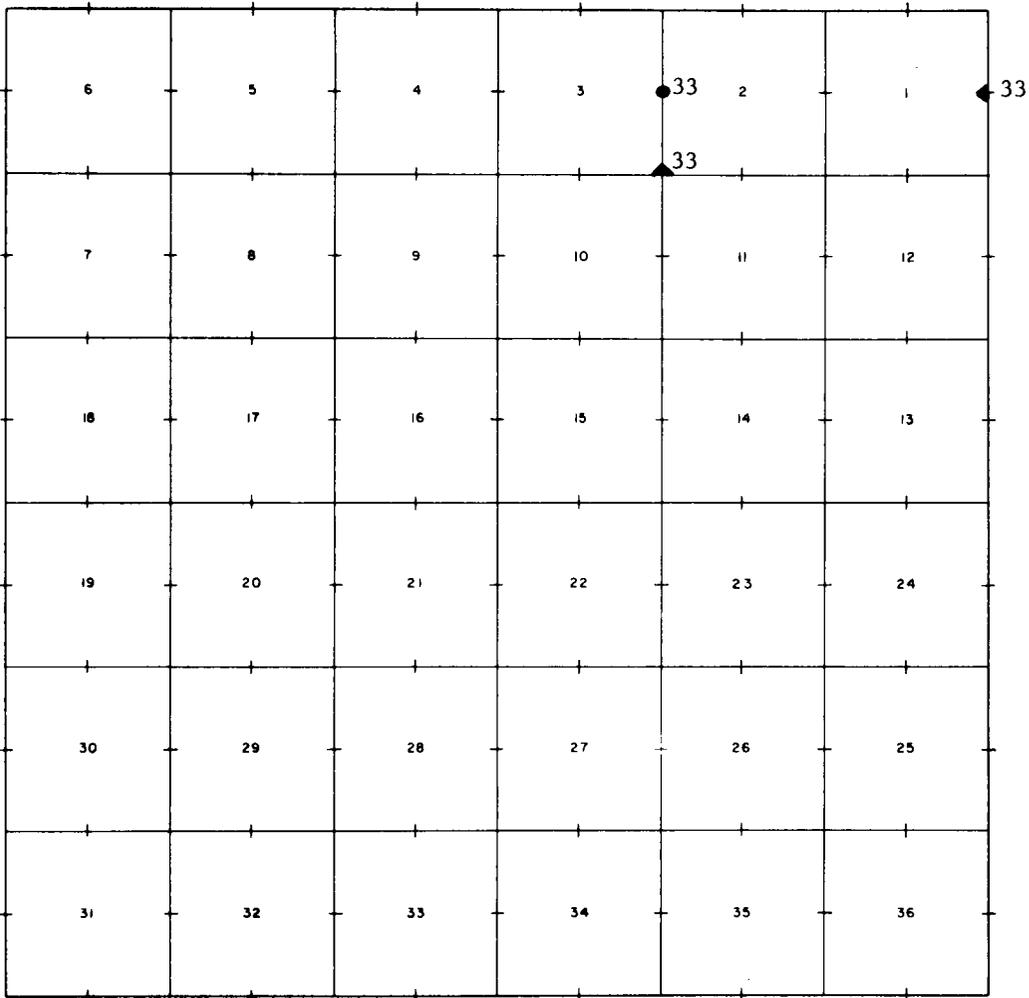


Blank

Page

CORNER REMONUMENTATION

INDEX DIAGRAM

Township 3 NORTH , Range 19 EAST , SALT LAKE Meridian

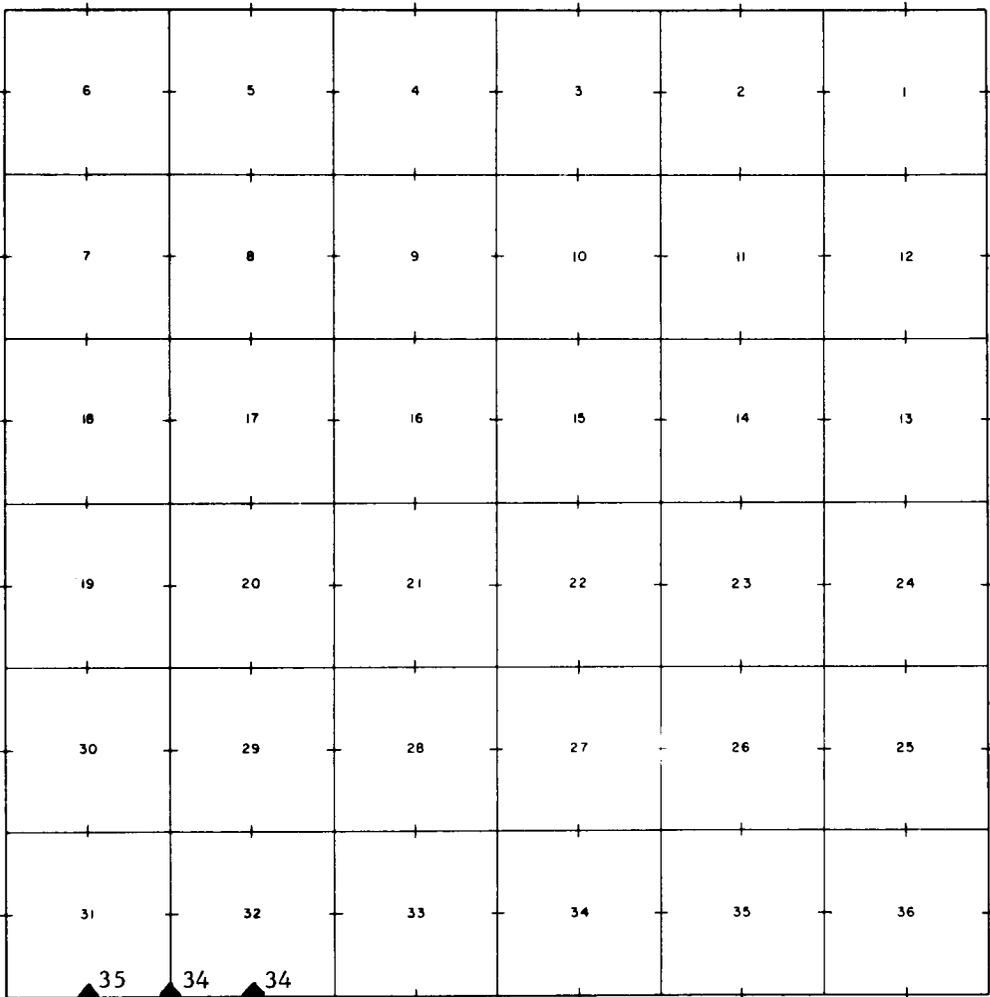

Blank

Page

Remonumentation of Corners in T. 1 N., R. 6 W.

CHAINS

The following field notes are those of the remonumentation of certain identified corners selected by the U.S. Forest Service as being located in or controlling the boundaries of Forest Service lands, situated in the Ashley National Forest. A Forester's Compass was used to determine the bearings of new corner accessories. The mean magnetic declinations were found to be as follows:

T. 1 N., R. 6 W., Uintah Meridian	16° 50' E.
T. 1 N., R. 8 W., " "	16° 55' E.
T. 1 N., R. 9 W., " "	16° 55' E.
T. 2 N., R. 1 E., " "	16° 40' E.
T. 2 N., R. 1 W., " "	16° 40' E.
T. 2 N., R. 4 W., " "	16° 50' E.
T. 2 N., R. 5 W., " "	16° 50' E.
T. 2 N., R. 6 W., " "	16° 50' E.
T. 2 N., R. 9 W., " "	16° 55' E.
T. 2 N., R. 19 E., Salt Lake Meridian	15° 30' E.
T. 3 N., R. 19 E., " " "	15° 30' E.

The position of each corner was marked by the original monument or determined from corner accessories recorded in the survey record. The monumentation was requested by and accomplished in cooperation with the Forest Service.

T. 1 N., R. 6 W.

Township 1 North, Range 6 West, Uintah Meridian, is located partially within the Ashley National Forest. The subdivisional lines were surveyed by Harvey D. Heist in 1903.

At the cor. of secs. 8, 9, 16 and 17, marked with a trachyte stone, 20x12x8 ins., firmly set and plainly mkd. with 4 notches on S. and 4 on E. edge.

At the cor. point

Set an iron post, 30 ins. long 2½ ins. in diam., 24 ins. in the ground and raise a mound of stone 3½ ft. base, 1½ ft. high to W. Brass cap mkd.

T1N R6W	
S8	S9
S17	S16
1968	

Deposit the original stone alongside the cor.

From which I mark

A cedar, 8 ins. in diam., bears N. 53° E., 38 lks. dist., mkd. T1N R6W S9 BT.

An aspen, 10 ins. in diam., bears S. 19° W., 100 lks. dist., mkd. T1N R6W S17 BT.

Remonumentation of Corners in T. 1 N., R. 6 W.

CHAINS

The cor. is located on the NE. slope of hill in 4 strand fence line that bears N. and S. 80 lks. dist. S. of small creek, 6 lks. wide, 6 ft. deep that flows E. approx. 7 chs. dist. W. of trail road that bears N. and S. In scattered aspen, cedar and pine growth.

At the $\frac{1}{4}$ sec. cor. of secs. 5 and 8, marked with a sandstone, 18x12x6 ins., firmly set and plainly mkd. $\frac{1}{4}$ on N. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins. in the ground and raise a mound of stone 3 ft. base, $1\frac{1}{2}$ ft. high to N. Brass cap mkd.

T1N R6W

$\frac{1}{4}$ $\frac{S5}{S8}$

1968

Deposit the original stone alongside the cor.

The cor. is located at base of steep E. slope of hill that bears N. and S. 150 lks. dist. S. of aspen grove that bears E. and W. 100 lks. dist. W. of trail road that bears N. and S. In sagebrush growth, no timber.

T. 1 N., R. 8 W.

Township 1 North, Range 8 West, Uintah Meridian, is located partially within the Ashley National Forest. The subdivisional lines were surveyed by Washington Jenkins in 1904.

At the $\frac{1}{4}$ sec. cor. of secs. 13 and 18, on the W. bdy. of Tp., marked with a sandstone, 14x10x6 ins., firmly set and plainly mkd. $\frac{1}{4}$ on W. face.

From which the remains of the original bearing tree

A pine, 16 ins. in diam., bears S. 42° E., 210 lks. dist., mkd. $\frac{1}{4}$ S18 BT.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 20 ins. in the ground and raise a mound of stone 3 ft. base, $1\frac{1}{2}$ ft. high to W. Brass cap mkd.

T1N

R9W R8W

$\frac{1}{4}$

S13 | S18

1968

Deposit the original stone alongside the cor.

Remonumentation of Corners in T. 1 N., R. 8 W.

CHAINS

The cor. is located on steep E. slope of hill approx. 450 ft. above North Fork of Duchesne River in thick oak brush.

At the cor. of secs. 1, 6, 7 and 12, on the W. bdy. of Tp., marked with a limestone, 20x10x6 ins., firmly set and plainly mkd. with 5 notches on S. and 1 on N. edge.

From which the remains of the original bearing trees

A cedar, 24 ins. in diam., bears S. 7° E., 87 lks. dist., mkd. T1N R8W S7 BT.

A cedar, 36 ins. in diam., bears S. 41° W., 120 lks. dist., mkd. T1N R9W S12 BT.

A cedar, 18 ins. in diam., bears N. 82° W., 168 lks. dist., mkd. T1N R9W S1 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 14 ins. in the ground and in a mound of stone 3½ ft. base to brass cap mkd.

T1N
R9W R8W

S1|S6
S12|S7

1968

Deposit the original stone in mound alongside the cor.

The cor. is located on top of steep rocky spur projecting S. approx. 300 ft. above North Fork of Duchesne River in thick oakbrush and scattered cedar.

At the ¼ sec. cor. of secs. 1 and 6, on the W. bdy. of Tp., marked with a sandstone, 15x12x5 ins., firmly set and plainly mkd. ¼ on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 18 ins. in the ground and in a collar of stone. Raise a mound of stone, 5 ft. base, 3 ft. high to W. Brass cap mkd.

T1N
R9W R8W

¼
S1|S6

1968

Deposit the original stone alongside the cor.

498

Remonumentation of Corners in T. 1 N., R. 8 W.

CHAINS

The cor. is located on top of steep rocky spur projecting S. 35° W. approx. 500 ft. above North Fork of Duchesne River in thick oakbrush.

At the cor. of secs. 14, 15, 22 and 23, marked with a sandstone, 18x12x6 ins., firmly set and plainly mkd. with 3 notches on S. and 2 on E. edge.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 15 ins. in the ground and in a mound of stone 3½ ft. base to brass cap mkd.

T1N R8W

S15 | S14
S22 | S23

1968

Deposit the original stone in mound alongside the cor.

The cor. is located on E. slope of ridge, 3 chs. dist. E. of top of ridge that bears S. 25° W. and N. 20° W. in sagebrush and shadscale growth.

At the cor. of secs. 15, 16, 21 and 22, marked with a sandstone, 22x14x8 ins., firmly set and plainly mkd. with 3 notches on S. and 3 on E. edge.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 8 ins. in the ground and in a mound of stone 3½ ft. base to brass cap mkd.

T1N R8W

S16 | S15
S21 | S22

1968

Deposit the original stone in mound alongside the cor.

The cor. is located on steep W. slope of hill approx. 7 chs. dist. E. of large draw that drains S. about 13 chs. dist. E. of trail road that bears N. and S. In sagebrush growth, no timber.

At the cor. of secs. 20, 21, 28 and 29, marked with a sandstone, 18x10x6 ins., firmly set and plainly mkd. with 4 notches on E. and 2 on S. edge.

Remonumentation of Corners in T. 1 N., R. 8 W.

CHAINS

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 10 ins. in the ground and in a mound of stone $3\frac{1}{2}$ ft. base to brass cap mkd.

T1N R8W

S20 | S21
S29 | S28

1968

Deposit the original stone in mound alongside the cor.

The cor. is located on steep E. slope of hill approx. 15 chs. dist. W. of large draw that drains S. approx. 12 chs. dist. E. of top of ridge that bears N. and S. In sage and oakbrush.

At the cor. of secs. 16, 17, 20 and 21, marked with a sandstone, 18x14x6 ins., firmly set and plainly mkd. with 4 notches on E. and 3 on S. edge.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins. in the ground and raise a mound of stone 3 ft. base, $1\frac{1}{2}$ ft. high to W. Brass cap mkd.

T1N R8W

S17 | S16
S20 | S21

1968

Deposit the original stone alongside the cor.

The cor. is located on E. slope of hill 450 lks. dist. W. of large draw that drains S. 2 chs. dist. E. of top of ridge that bears N. and S. at E. edge of aspen grove that bears N. and S.

At the cor. of secs. 29, 30, 31 and 32, marked with a sandstone, 18x12x6 ins., firmly set and plainly mkd. with 5 notches on E. and 1 on S. edge.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins. in the ground and raise a mound of stone $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high to W. Brass cap mkd.

T1N R8W

S30 | S29
S31 | S32

1968

Deposit the original stone in mound alongside the cor.

Remonumentation of Corners in T. 1 N., R. 8 W.

CHAINS

The cor. is located on gentle NE. slope of hill at the cor. of netwire fence that bears E., W. and N. 7 lks. dist. N. of small irrigation ditch that flows E. approx. 20 chs. dist. W. of Duchesne River that flows SE. In sagebrush and scattered cotton wood trees.

At the $\frac{1}{2}$ sec. cor. of secs. 17 and 18, marked with a sandstone, 18x12x6 ins., firmly set and plainly mkd. $\frac{1}{2}$ on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. in diam., 6 ins. in the ground and in a mound of stone 3 $\frac{1}{2}$ ft. base to brass cap mkd.

T1N R8W

$\frac{1}{2}$
S18|S17

1968

Deposit the original stone in mound alongside the cor.

The cor. is located on E. slope of spur projecting S. 450 lks. dist. W. of draw that drains S. In thick oakbrush.

At the $\frac{1}{2}$ sec. cor. of secs. 18 and 19, marked with a trachyte stone, 18x12x6 ins., firmly set and plainly mkd. $\frac{1}{2}$ on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. in diam., 24 ins. in the ground and raise a mound of stone 4 ft. base, 2 ft. high to N. Brass cap mkd.

T1N R8W

$\frac{1}{2}$ S18
S19

1968

Deposit the original stone alongside the cor.

The cor. is located on steep SE. slope of hill approx. 30 chs. dist. W. of North Fork of Duchesne River that flows S. about 350 ft. above river. In sage and oakbrush.

T. 1 N., R. 9 W.

Township 1 North, Range 9 West, Uintah Meridian, is located partially within the Ashley National Forest. The subdivisional lines were surveyed by Fred Johnson in 1903.

Remonumentation of Corners in T. 1 N., R. 9 W.

CHAINS

At the $\frac{1}{2}$ sec. cor. of secs. 3 and 4, marked with a limestone, 18x16x10 ins., firmly set and plainly mkd. $\frac{1}{2}$ on W. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 15 ins. in the ground and in a mound of stone $3\frac{1}{2}$ ft. base to brass cap mkd.

T1N R9W

$\frac{1}{2}$
S4|S3

1968

Deposit the original stone alongside the cor.

The cor. is located on W. slope of hill 5 chs. dist. E. of bottom of draw that drains S. approx. 7 chs. dist. E. of trail road that bears N. and S. In scattered aspen and pine growth.

T. 2 N., R. 1 E.

Township 2 North, Range 1 East, Uintah Meridian, is located partially within the Ashley National Forest. Surveyed by James H. Martineau in 1904.

At the cor. of secs. 20, 21, 28 and 29, marked with a sandstone, 18x12x8 ins., firmly set and plainly mkd. with 4 notches on E. and 2 on S. edge.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 15 ins. in the ground and in a mound of stone 3 ft. base to brass cap mkd.

T2N R1E

S20|S21
S29|S28

1968

Deposit the original stone in mound alongside the cor.

The cor. is located on gentle S. slope of rolling benchland in 4 strand fence line that bears E. and W. In scattered cedar growth.

At the $\frac{1}{2}$ sec. cor. of secs. 20 and 29, marked with a sandstone, 18x12x8 ins., firmly set and plainly mkd. $\frac{1}{2}$ on N. face.

At the cor. point

Remonumentation of Corners in T. 2 N., R. 1 E.

CHAINS

Set an iron post, 30 ins. long, 2½ ins. in diam., 12 ins. in the ground and in a mound of stone 3½ ft. base to brass cap mkd.

T2N R1E

$$\frac{1}{2} \frac{S20}{S29}$$

1968

Deposit the original stone in mound alongside the cor.

The cor. is located on SE. slope of spur projecting S. 35° W. approx. 8 chs. dist. W. of large draw that drains S. 35° W. 116 lks. dist. S. of 4 strand fence line that bears E. and W. In scattered scrub cedar.

At the ½ sec. cor. of secs. 19 and 30, which is established at a point N. 40° 15' W., 27 lks. dist. from an original cedar bearing tree 10 ins. in diam., mkd. ½ S30 BT. This point falls in scattered mound of stones. The original cor. stone, a sandstone, 30x20x8 ins., plainly mkd. "½", was found lying loose on the ground alongside bulldozed trail road.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 12 ins. in the ground and in a mound of stone 4 ft. base to brass cap mkd.

T2N R1E

$$\frac{1}{2} \frac{S19}{S30}$$

1968

Deposit the original stone in mound alongside the cor.

The cor. is located on rolling benchland in netwire fence line that bears E. and W. 10 lks. dist. S. of trail road that bears E. and W. In dense pinon and cedar growth.

T. 2 N., R. 1 W.

Township 2 North, Range 1 West, Uintah Meridian, is located partially within the Ashley National Forest. Surveyed by James H. Martineau in 1903.

At the ½ sec. cor. of secs. 19 and 24, on the E. bdy. of the Tp., marked with a sandstone, 22x14x8 ins., firmly set and plainly mkd. ½ on W. face.

Remonumentation of Corners in T. 2 N., R. 1 W.

CHAINS

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 12 ins. in the ground and in a mound of stone 3½ ft. base to brass cap mkd.

T2N
R1W R1E
½
S24|S19
1968

Deposit the original stone in mound alongside the cor.

The cor. is located on steep rocky SE. slope of hill approx. 8 chs. dist. E. of top of hill.

At the cor. of secs. 13, 18, 19 and 24, on the E. bdy. of Tp., marked with a sandstone, 20x12x7 ins., firmly set and plainly mkd. with 3 notches on S. and 3 on N. edge.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 10 ins. in the ground and in a mound of stone 3½ ft. base to brass cap mkd.

T2N
R1W R1E
S13|S18
S24|S19
1968

Deposit the original stone in mound alongside the cor.

The cor. is located on top of ridge that bears N. and S. 32 lks. dist. E. of 4 strand fence line that bears N. and S. 50 lks. dist. N. of small draw that drains S. 50° W. In pinon and cedar growth.

At the ½ sec. cor. of secs. 13 and 18, on the E. bdy. of Tp., marked with a sandstone, 16x12x6 ins., firmly set and plainly mkd. ½ on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 16 ins. in the ground and in a mound of stone 3½ ft. base to brass cap mkd.

T2N
R1W R1E
½
S13|S18
1968

Remonumentation of Corners in T. 2 N., R. 1 W.

CHAINS

Deposit the original stone in mound alongside the cor.

The cor. is located on top of rocky ridge that bears N. and S. in scattered pinon and cedar growth.

At the cor. of secs. 7, 12, 13 and 18, on the E. bdy. of Tp., marked with a sandstone, 16x12x4 ins., firmly set and plainly mkd. with 4 notches on S. and 2 on N. edge.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 18 ins. in the ground and in a collar of stone. Raise a mound of stone 3 ft. base, 1½ ft. high to W. Brass cap mkd.

T2N
R1W R1E
S12|S7
S13|S18

1968

Deposit the original stone in mound alongside the cor.

The cor. is located on steep rocky S. slope of hill approx. 6 chs. dist. E. of small draw that drains S. 75° E. In dense pinon and scrub cedar.

At the cor. of secs. 13, 14, 23 and 24, marked with a sandstone, 14x10x6 ins., firmly set and plainly mkd. with 3 notches on S. and 1 on E. edge.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 20 ins. in the ground and raise a mound of stone 3 ft. base, 1½ ft. high to W. Brass cap mkd,

T2N R1W
S14|S13
S23|S24

1968

Deposit the original stone alongside the cor.

The cor. is located on gentle SW. slope of hill at the cor. of 4 strand fence line that bears S., W. and N. 75° E. approx. 10 chs. dist., N. of dry creek bed that drains W. In scattered cedar growth.

Remonumentation of Corners in T. 2 N., R. 1 W.

CHAINS

At the $\frac{1}{4}$ sec. cor. of secs. 13 and 24, marked with a sandstone, 17x10x6 ins., firmly set and plainly mkd. $\frac{1}{4}$ on N. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 20 ins. in the ground and raise a mound of stone 3 ft. base, $1\frac{1}{2}$ ft. high to N. Brass cap mkd.

T2N R1W

$\frac{1}{4}$ $\frac{S13}{S24}$

1968

Deposit the original stone alongside the cor.

The cor. is located in rolling grassy benchland approx. 10 chs. dist. N. of trail road that bears E. and W. In scattered cedar growth.

At the cor. of secs. 22, 23, 26 and 27, marked with a sandstone, 20x12x6 ins., firmly set and plainly mkd. with 2 notches on S. and 2 on E. edge.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 14 ins. in the ground and in a mound of stone $3\frac{1}{2}$ ft. base to brass cap mkd.

T2N R1W

$\frac{S22}{S27}$ | $\frac{S23}{S26}$

1968

Deposit the original stone in mound alongside the cor.

The cor. is located on E. slope of hill approx. 6 chs. dist. W. of large draw that drains S. with old jeep trail in bottom 100 lks. dist. S. of 4 strand fence line that bears E. and W. In pinon and cedar growth.

At the $\frac{1}{4}$ sec. cor. of secs. 22 and 23, marked with a sandstone, 16x10x7 ins., firmly set and plainly mkd. $\frac{1}{4}$ on W. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 14 ins. in the ground and in a mound of stone $3\frac{1}{2}$ ft. base to brass cap mkd.

506

Remonumentation of Corners in T. 2 N., R. 1 W.

CHAINS

T2N R1W

 $\frac{1}{2}$
S22|S23

1968

Deposit the original stone in mound alongside the cor.

The cor. is located on W. slope of ridge 100 lks. dist. E. of top of ridge that bears N. 10° W. and S. 10° E. approx. 6 chs. dist. E. of draw that drains S. 15° E. In cedar and pinon growth.

T. 2 N., R. 4 W.

Township 2 North, Range 4 West, Uintah Meridian, is located within the Ashley National Forest. The subdivisional lines were surveyed by J. C. Dick and A. K. Tiernan in 1903.

At the $\frac{1}{2}$ sec. cor. of secs. 23 and 24, marked with a sandstone, 16x12x8 ins., firmly set and plainly mkd. $\frac{1}{2}$ on W. face.

From which the remains of the original bearing trees

A pine, 15 ins. in diam., bears N. 60° E., 53 lks. dist., mkd. $\frac{1}{2}$ S24 BT. Record N. 60° 30' E., 55 lks. dist.

A pine, 20 ins. in diam., bears S. 44° W., 9 lks. dist., mkd. $\frac{1}{2}$ S23 BT. Record S. 42° 15' W., 10 lks. dist.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. in diam., 12 ins. in the ground and in a mound of stone 3 $\frac{1}{2}$ ft. base to brass cap mkd.

T2N R4W

 $\frac{1}{2}$
S23|S24

1968

Deposit the original stone in mound alongside the cor.

The cor. is located on rolling benchland approx. 6 chs. dist. NE. of small clearing in very thick aspen and pine growth.

At the cor. of secs. 13, 14, 23 and 24, marked with a sandstone, 17x10x8 ins., firmly set and plainly mkd. with 3 notches on S. and 1 on E. edge.

At the cor. point

Remonumentation of Corners in T. 2 N., R. 4 W.

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 16 ins. in the ground and in a mound of stone $3\frac{1}{2}$ ft. base to brass cap mkd.

T2N R4W

<u>S14</u>	<u>S13</u>
S23	S24

1968

Deposit the original stone in mound alongside the cor.

From which I mark

An aspen, 5 ins. in diam., bears N. 29° E., 21 lks. dist., mkd. T2N R4W S13 BT.

An aspen, 8 ins. in diam., bears S. 7° E., 29 lks. dist., mkd. T2N R4W S24 BT.

An aspen, 8 ins. in diam., bears S. $81^{\circ} 30'$ W., 44 lks. dist., mkd. T2N R4W S23 BT.

An aspen, 6 ins. in diam., bears N. 33° W., 32 lks. dist., mkd. T2NR4W S14 BT.

The cor. is located on gentle S. slope of hill 2 chs. dist. N. of draw that drains E., 250 lks. dist. S. of trail road that bears E. and W. In dense aspen growth.

At the cor. of secs. 26, 27, 34 and 35, marked with a sandstone, 18x10x8 ins., firmly set and plainly mkd. with 2 notches on E. and 1 on S. edge.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins. in the ground and raise a mound of stone 3 ft. base, $1\frac{1}{2}$ ft. high to W. Brass cap mkd.

T2N R4W

<u>S27</u>	<u>S26</u>
S34	S35

1968

Deposit the original stone alongside the cor.

The cor. is located in middle of large grassy flat 325 lks. dist. E. of trail road that bears N. and S. No timber.

At the cor. of secs. 14, 15, 22 and 23, marked with a sandstone, 16x10x8 ins., firmly set and plainly mkd. with 3 notches on S. and 2 on E. edge.

No remaining evidence of the original bearing trees.

508

Remonumentation of Corners in T. 2 N., R. 4 W.

CHAINS

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins. in the ground and raise a mound of stone 3 ft. base, $1\frac{1}{2}$ ft. high to W. Brass cap mkd.

T2N R4W

S15	S14
S22	S23

1968

Deposit the original stone alongside the cor.

From which I mark

An aspen, 5 ins. in diam., bears N. 35° E., 21 lks. dist., mkd. T2N R4W S14 BT.

An aspen, 6 ins. in diam., bears S. 65° E., 17 lks. dist., mkd. T2N R4W S23 BT.

An aspen, 7 ins. in diam., bears S. 50° W., 4 lks. dist., mkd. T2N R4W S22 BT.

An aspen, 7 ins. in diam., bears N. 80° W., 4 lks. dist., mkd. T2N R4W S15 BT.

The cor. is located on W. slope of hill approx. 20 chs. dist. E. of trail road that bears N. and S. In dense aspen growth.

At the $\frac{1}{4}$ sec. cor. of secs. 14 and 23, marked with a sandstone, $16 \times 10 \times 4$ ins., firmly set and plainly mkd. $\frac{1}{4}$ on N. face.

From which the remains of the original bearing trees

A ponderosa pine, 24 ins. in diam., bears N. 74° W., 23 lks. dist., mkd. $\frac{1}{4}$ S14 BT. Record N. 74° W., 25 lks. dist.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 20 ins. in the ground and raise a mound of stone 3 ft. base, $1\frac{1}{2}$ ft. high to N. Brass cap mkd.

T2N R4W

$\frac{1}{4}$	S14
	S23

1968

Deposit the original stone alongside the cor.

From which I mark

A ponderosa pine, 14 ins. in diam., bears S. 39° $30'$ E., 50 lks. dist., mkd. $\frac{1}{4}$ S23 BT.

Remonumentation of Corners in T. 2 N., R. 4 W.

CHAINS

The cor. is located 100 lks. dist. W. of top of ridge that bears N. 15° W. by S. 15° E. in aspen and pine growth.

At the $\frac{1}{2}$ sec. cor. of secs. 27 and 34, marked with a sandstone, 22x12x10 ins., firmly set and plainly mkd. $\frac{1}{2}$ on N. face.

From which the remains of the original bearing tree

A ponderosa pine, 20 ins. in diam., bears N. 59° E., 63 lks. dist., mkd. $\frac{1}{2}$ S27 BT. Record N. 58° 45' E., 65 lks. dist.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. in diam., 20 ins. in the ground and raise a mound of stone 3 ft. base, 1 $\frac{1}{2}$ ft. high to N. Brass cap mkd.

T2N R4W

$\frac{1}{2}$ S27

S34

1968

Deposit the original stone alongside the cor.

The cor. is located on steep E. slope, 350 lks. dist. E. of top of ridge that bears N. and S. approx. 6 chs. dist. W. of trail road that bears N. and S. In scattered pine growth.

At the $\frac{1}{2}$ sec. cor. of secs. 15 and 16, marked with a sandstone, 18x10x6 ins., firmly set and plainly mkd. $\frac{1}{2}$ on W. face.

From which the remains of the original bearing trees

A ponderosa pine, 30 ins. in diam., bears N. 16° E., 124 lks. dist., mkd. $\frac{1}{2}$ S15 BT. Record N. 20° 30' E., 120 lks. dist.

A ponderosa pine, 36 ins. in diam., bears N. 14° W., 142 lks. dist., mkd. $\frac{1}{2}$ S16 BT. Record N. 14° W., 132 lks. dist.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. in diam., 24 ins. in the ground and raise a mound of stone 3 ft. base, 1 $\frac{1}{2}$ ft. high to W. Brass cap mkd.

T2N R4W

$\frac{1}{2}$
S16 | S15

1968

Deposit the original stone alongside the cor.

Remonumentation of Corners in T. 2 N., R. 4 W.

CHAINS

The cor. is located on W. slope of hill approx. 20 chs. dist. W. of Yellowstone River that flows S. in dense pine and aspen growth.

At the cor. of secs. 9, 10, 15 and 16, marked with a sandstone, 20x12x10 ins., firmly set and plainly mkd. with 4 notches on S. and 3 on E. edge.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground and raise a mound of stone 3 ft. base, 1½ ft. high to W. Brass cap mkd.

T2N R4W

S9	S10
S16	S15

1968

Deposit the original stone alongside the cor.

From which I mark

A ponderosa pine, 30 ins. in diam., bears S. 73° E., 55 lks. dist., mkd. T2N R4W S15 BT.

A lodge pole pine, 10 ins. in diam., bears S. 56° W., 21 lks. dist., mkd. T2N R4W S16 BT.

An aspen, 6 ins. in diam., bears N. 27° W., 22 lks. dist., mkd. T2N R4W S9 BT.

The cor. is located at head of draw, 100 lks. wide, that drains S. 70° E. approx. 20 chs. dist. W. of Yellowstone River that flows S. In scattered aspen and pine growth.

At the ½ sec. cor. of secs. 10 and 15, marked with a sandstone, 15x8x6 ins., firmly set and plainly mkd. ½ on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground and raise a mound of stone 3 ft. base, 1½ ft. high to N. Brass cap mkd.

T2N R4W

½	S10
	S15

1968

Deposit the original stone alongside the cor.

From which I mark

A ponderosa pine, 30 ins. in diam., bears S. 65° W., 50 lks. dist., mkd. ½ S15 BT.

Remonumentation of Corners in T. 2 N., R. 4 W.

CHAINS

The cor. is located on steep SW. slope of hill about 10 chs. dist. E. of dirt road that bears N. and S. approx. 18 chs. dist. E. of Yellowstone River that flows S. In scattered pine growth.

At the cor. of secs. 3, 4, 9 and 10, marked with a sandstone, 18x12x8 ins., firmly set and plainly mkd. with 5 notches on S. and 3 on E. edge.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins. in the ground and raise a mound of stone 3 ft. base, $1\frac{1}{2}$ ft. high to W. Brass cap mkd.

T2N R4W

S4 | S3
S9 | S10

1968

Deposit the original stone alongside the cor.

From which I mark

An aspen, 10 ins. in diam., bears N. 54° E., $28\frac{1}{2}$ lks. dist., mkd. T2N R4W S3 BT.

An aspen, 7 ins. in diam., bears S. 56° E., 26 lks. dist., mkd. T2N R4W S10 BT.

An aspen, 5 ins. in diam., bears S. 55° W., $4\frac{1}{2}$ lks. dist., mkd. T2N R4W S9 BT.

An aspen, 6 ins. in diam., bears N. 36° W., $29\frac{1}{2}$ lks. dist., mkd. T2N R4W S4 BT.

The cor. is located on gentle W. slope approx. 8 chs. dist. E. of dirt road that bears N. and S. In thick aspen growth.

At the cor. of secs. 28, 29, 32 and 33, marked with a sandstone, 16x10x10 ins., firmly set and plainly mkd. with 4 notches on E. and 1 on S. edge.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins. in the ground and raise a mound of stone 3 ft. base, $1\frac{1}{2}$ ft. high to W. Brass cap mkd.

T2N R4W

S29 | S28
S32 | S33

1968

Deposit the original stone alongside the cor.

512

Remonumentation of Corners in T. 2 N., R. 4 W.

CHAINS

The cor. is located on rolling benchland facing E. approx, 15 chs. dist. E. of trail road in small canyon that drains S. 15° E. No timber.

At the $\frac{1}{4}$ sec. cor. of secs. 28 and 29, marked with a sandstone, 18x8x6 ins., firmly set and plainly mkd. $\frac{1}{4}$ on W. face.

From which the remains of the original bearing tree

A ponderosa pine, 18 ins. in diam., bears N. 34° E., 96 lks. dist., mks. $\frac{1}{4}$ S28 BT.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. in diam., 24 ins. in the ground and raise a mound of stone, 3 ft. base, 1 $\frac{1}{2}$ ft. high to W. Brass cap mkd.

T2N R4W
 $\frac{1}{4}$
 S29 | S28
 1968

Deposit the original stone alongside the cor.

The cor. is located in small picket on top of ridge that bears N. and S. approx. 6 chs. dist. E. of trail road in small canyon that drains S. In scattered pine growth.

At the cor. of secs. 20, 21, 28 and 29, marked with a sandstone, 12x10x8 ins., firmly set and plainly mkd. with 4 notches on E. and 2 on S. edge.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. in diam., 20 ins. in the ground and raise a mound of stone 3 ft. base, 1 $\frac{1}{2}$ ft. high to W. Brass cap mkd.

T2N R4W
S20 | S21
S29 | S28
 1968

Deposit the original stone alongside the cor.

From which I mark

An aspen, 8 ins. in diam., bears N. 73° E., 82 lks. dist., mkd. T2N R4W S21 BT.

A pine, 13 ins. in diam., bears S. 44° E., 75 lks. dist., mkd. T2N R4W S28 BT.

A pine, 8 ins. in diam., bears S. 70° W., 166 lks. dist., mkd. T2N R4W S29 BT.

Remonumentation of Corners in T. 2 N., R. 4 W.

CHAINS

A pine, 10 ins. in diam., bears N. 50° 30' W., 109 lks. dist., mkd. T2N R4W S20 BT.

The cor. is located in nearly level draw that drains S. 15° W. 225 lks. dist. E. of trail road that bears N. and S. In aspen and pine growth.

At the $\frac{1}{2}$ sec. cor. of secs. 21 and 28, marked with a sandstone, 16x10x6 ins., firmly set and plainly mkd. $\frac{1}{2}$ on N. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 10 ins. in the ground and in a mound of stone $3\frac{1}{2}$ ft. base to brass cap mkd.

T2N R4W

$\frac{1}{2}$ $\frac{S21}{S28}$

1968

Deposit the original stone in mound alongside the cor.

The cor. is located on rolling benchland 50 lks. dist. N. of mouth of Hells Canyon that drains E. In scattered cottonwood trees.

At the cor. of secs. 16, 17, 20 and 21, marked with a sandstone, 18x10x8 ins., firmly set and plainly mkd. with 4 notches on E. and 3 on S. edge.

From which the remains of the original bearing trees

A pine, 8 ins. in diam., bears S. 84° 20' E., 12 lks. dist., mkd. T2N R4W S21 BT. Record S. 56° E., 15 lks. dist.

A pine, 10 ins. in diam., bears S. 9° W., 35 lks. dist., mkd. T2N R4W S20 BT. Record S. 55° W., 120 lks. dist.

A pine, 10 ins. in diam., bears N. 76° 30' W., 8 lks. dist., mkd. T2N R4W S17 BT. Record N. 40° W., 35 lks. dist.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 14 ins. in the ground and in a mound of stone $3\frac{1}{2}$ ft. base to brass cap mkd.

T2N R4W

$\frac{S17}{S20}$ | $\frac{S16}{S21}$

1968

Remonumentation of Corners in T. 2 N., R. 4 W.

CHAINS

Deposit the original stone in mound alongside the cor.

The cor. is located on very steep SE. slope of hill facing the Yellowstone Range Station. In dense pine and aspen growth.

T. 2 N., R. 5 W.

Township 2 North, Range 4 West, Uintah Meridian, is located within the Ashley National Forest. Surveyed by A. K. Tiernan in 1903.

At the cor. of secs. 35 and 36 on the S. bdy. of the Tp., marked with a trachyte stone, 18x14x10 ins., firmly set and plainly mkd. with 5 notches on W. and 1 on E. edge.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 14 ins. in the ground and in a mound of stone 3½ ft. base to brass cap mkd.

T2N R5W

S35|S36

S2

T1N R5W

1968

Deposit the original stone in mound alongside the cor.

The cor. is located on W. slope of rocky spur projecting S. 30° E. in 4 strand fence line that bears E. and W. In sagebrush growth, no timber.

At the ¼ sec. cor. of sec. 34, on the S. bdy. of Tp., marked with a sandstone, 20x14x10 ins., firmly set and plainly mkd. ¼ on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground and raise a mound of stone 3½ ft. base, 1½ ft. high to N. Brass cap mkd.

T2N R5W

¼ S34

T1N R5W

1968

Deposit the original stone alongside the cor.

Remonumentation of Corners in T. 2 N., R. 5 W.

CHAINS

The cor. is located on gentle W. slope of hill in net-wire fence line that bears E. and W. approx. 6 chs. dist. E. of Moon Lake Road that bears N. and S. In sagebrush growth, no timber.

At the cor. of secs. 13, 18, 19 and 24, on the W. bdy. of Tp., marked with a trachyte stone, 18x12x6 ins., firmly set and plainly mkd. with 3 notches on N. and 3 on S. edge.

No remaining evidence of the original bearing trees.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with a steel post 72 ins. long, in ground alongside. Brass cap mkd.

T2N
R6W R5W

S13	S18
S24	S19

1968

Deposit the original stone alongside the cor.

From which I mark

A pine, 6 ins. in diam., bears N. 11° E., 23 lks. dist., mkd. T2N R5W S18 BT.

A pine, 6 ins. in diam., bears S. 65° E., 35 lks. dist., mkd. T2N R5W S19 BT.

A pine, 10 ins. in diam., bears S. 17° W., 47 lks. dist., mkd. T2N R6W S24 BT.

A pine, 8 ins. in diam., bears N. 79° W., 40 lks. dist., mkd. T2N R6W S13 BT.

The cor. is located on gentle E. slope of hill approx. 30 chs. dist. W. of Moon Lake Road about 16 chs. dist. W. of pole corral. In dense pine growth.

At the ½ sec. cor. of secs. 35 and 36, marked with a sandstone, 22x12x8 ins., firmly set and plainly mkd. ½ on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 12 ins. in the ground and in a mound of stone 3½ ft. base to brass cap mkd.

516

Remonumentation of Corners in T. 2 N., R. 5 W.

CHAINS

T2N R5W

 $\frac{1}{2}$

S35|S36

1968

Deposit the original stone in mound alongside the cor.

The cor. is located on gentle SW. slope of hill 100 lks. dist. E. of aspen grove that bears N. and S. approx. 10 chs. dist. S. of trail road that bears E. and W. In sagebrush growth.

At the $\frac{1}{2}$ sec. cor. of secs. 26 and 35, marked with a sandstone, 20x14x6 ins., firmly set and plainly mkd. $\frac{1}{2}$ on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. in diam., 15 ins. in the ground and in a mound of stone 3 ft. base to brass cap. Raise a mound of stone 5 ft. base, 3 ft. high, to N. Brass cap mkd.

T2N R5W

 $\frac{1}{4}$ $\frac{S26}{S35}$

1968

Deposit the original stone alongside the cor.

The cor. is located on steep rocky W. slope, 250 lks. dist. W. of top of ridge that bears N. and S. approx. 15 chs. dist. E. of large draw that drains S. In scattered mahogany growth.

At the cor. of secs. 26, 27, 34 and 35, marked with a red sandstone, 18x12x6 ins., firmly set and plainly mkd. with 2 notches on E. and 1 on S. edge.

No remaining evidence of the original bearing trees.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. in diam., 24 ins. in the ground and raise a mound of stone 3 $\frac{1}{2}$ ft. base, 1 $\frac{1}{2}$ ft. high to W. Brass cap mkd.

T2N R5W

 $\frac{S27}{S34}$ $\frac{S26}{S35}$

1968

Deposit the original stone alongside the cor.

Remonumentation of Corners in T. 2 N., R. 5 W.

CHAINS

From which I mark

A pinon pine, 10 ins. in diam., bears S. 2° W.,
11 lks. dist., mkd. T2N R5W S34 BT.

The cor. is located on steep S. slope of hill 100 lks.
dist. E. of top of spur projecting S. 45° W. approx.
10 chs. dist. N. of base of hill that bears S. 40° E.
and N. 60° W. In dense mahogany, pinon and cedar growth.

At the cor. of secs. 27, 28, 33 and 34, marked with a
sandstone, 18x14x6 ins., firmly set and plainly mkd.
with 3 notches on E. and 1 on S. edge.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24
ins. in the ground and raise a mound of stone 3½ ft.
base, 1½ ft. high to W. Brass cap mkd.

T2N R5W

S28	S27
S33	S34

1968

Deposit the original stone alongside the cor.

The cor. is located on rolling SW. slope of hill approx.
6 chs. dist. N. of Fisher Ranch Cabin. In scattered
cedar growth.

At the cor. of secs. 28, 29, 32 and 33, marked with a
sandstone, 16x10x10 ins., firmly set and plainly mkd.
with 4 notches on E. and 1 on S. edge.

from which the remains of the original bearing trees

A ponderosa pine, 30 ins. in diam., bears N. 83°
E., 59 lks. dist., mkd. T2N R5W S27 BT. Record
N. 76° E., 59 lks. dist.

A ponderosa pine, 25 ins. in diam., bears N. 30°
30' W., 58 lks. dist., mkd. T2N R5W S28 BT.
Record N. 39° W., 58 lks. dist.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24
ins. in the ground and raise a mound of stone 3½ ft.
base, 1½ ft. high to W. Brass cap mkd.

T2N R5W

S29	S28
S32	S33

1968

Deposit the original stone alongside the cor.

518

Remonumentation of Corners in T. 2 N., R. 5 W.

CHAINS

The cor. is located on gentle NE. slope 45 lks. dist. W. of trail road that bears N. and S. In scattered pine and aspen growth.

At the $\frac{1}{4}$ sec. cor. of secs. 29 and 32, marked with a sandstone, 18x14x8 ins., firmly set and plainly mkd. $\frac{1}{4}$ on N. face.

from which the remains of the original bearing trees

A pine, 20 ins. in diam., bears N. 7° E., 103 lks. dist., mkd. $\frac{1}{4}$ S29 BT.

A pine, 24 ins. in diam., bears S. 4° E., 19 lks. dist., mkd. $\frac{1}{4}$ S32 BT.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. in diam., 15 ins. in the ground and in a mound of stone 3 $\frac{1}{2}$ ft. base to brass cap mkd.

T2N R5W

$\frac{1}{4}$ $\frac{S29}{S32}$

1968

Deposit the original stone in mound alongside the cor.

The cor. is located on rocky NE. slope of hill in dense pine and aspen growth.

At the cor. of secs. 29, 30, 31 and 32, mkd. with a sandstone, 18x14x6 ins., firmly set and plainly mkd. with 5 notches on E. and 1 on S. edge.

No remaining evidence of the original bearing trees.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. in diam., 10 ins. in the ground and in a mound of stone 4 ft. base to brass cap mkd.

T2N R5W

$\frac{S30}{S31}$ | $\frac{S29}{S32}$

1968

Deposit the original stone in mound alongside the cor.

From which I mark

Remonumentation of Corners in T. 2 N., R. 5 W.

CHAINS

A pine, 8 ins. in diam., bears N. 53° E., 20 lks. dist., mkd. T2N R5W S29 BT.

A pine, 8 ins. in diam., bears S. 73° E., 26 lks. dist., mkd. T2N R5W S32 BT.

A pine, 4 ins. in diam., bears S. 8° W., 30 lks. dist., mkd. T2N R5W S31 BT.

A pine, 7 ins. in diam., bears N. 50° W., 21 lks. dist., mkd. T2N R5W S30 BT.

The cor. is located in bottom of draw that drains N. 35° W. In dense pine and aspen growth.

At the $\frac{1}{2}$ sec. cor. of secs. 29 and 30, marked with a sandstone, 18x9x6 ins., firmly set and plainly mkd. $\frac{1}{2}$ on W. face.

No remaining evidence of the original bearing trees.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. in diam., 24 ins. in the ground and raise a mound of stone 3 ft. base, 1 $\frac{1}{2}$ ft. high to W. Brass cap mkd.

T2N R5W

$\frac{1}{2}$
S30 | S29

1968

Deposit the original stone alongside the cor.

From which I mark

A pine, 20 ins. in diam., bears N. 71° E., 72 lks. dist., mkd. $\frac{1}{2}$ S29 BT.

A pine, 20 ins. in diam., bears N. 77° 30' W., 102 lks. dist., mkd. $\frac{1}{2}$ S30 BT.

The cor. is located on rocky E. slope of hill under 4 strand power line that bears S. 38° 30' E. and N. 38° 31' W. In dense aspen and pine growth.

At the cor. of secs. 19, 20, 29 and 30, marked with a sandstone, 20x12x8 ins., firmly set and plainly mkd. with 5 notches on E. and 2 on S. edge.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. in diam., 24 ins. in the ground and raise a mound of stone 3 $\frac{1}{2}$ ft. base, 1 $\frac{1}{2}$ ft. high to W. Brass cap mkd.

Remonumentation of Corners in T. 2 N., R. 5 W.

CHAINS

T2N R5W

S19	S20
S30	S29

1968

Deposit the original stone alongside the cor.

The cor. is located on nearly level land 150 lks. dist. E. of Moon Lake Road (oiled) that bears N. 19° W. and S. 19° E. In sagebrush growth, no timber.

At the $\frac{1}{2}$ sec. cor. of secs. 19 and 20, marked with a sandstone, 18x10x8 ins., firmly set and plainly mkd. $\frac{1}{2}$ on W. face.

No remaining evidence of the original bearing trees.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. in diam., 24 ins. in the ground and raise a mound of stone 3 $\frac{1}{2}$ ft. base, 1 $\frac{1}{2}$ ft. high to W. Brass cap mkd.

T2N R5W

$\frac{1}{2}$	S20
S19	

1968

Deposit the original stone alongside the cor.

From which I mark

A pine, 12 ins. in diam., bears N. 25° 30' E., 80 lks. dist., mkd. $\frac{1}{2}$ S20 BT.

The cor. is located on top of small spur projecting S. 45° E. 150 lks. dist. S. of right rim of Lake Fork River that flows S. 30° E. 150 lks. dist. N. of trail road that bears S. 45° E. and N. 45° W. In scattered pine growth.

At the cor. of secs. 17, 18, 19 and 20, marked with a trachyte stone, 18x8x4 ins., firmly set and plainly mkd. with 5 notches on E. and 3 on S. edge.

From which the remains of the original bearing trees

A pine, 8 ins. in diam., bears N. 32° 30' E., 22 lks. dist., mkd. T2N R5W S17 BT. Record N. 46° E., 23 lks. dist.

A pine, 15 ins. in diam., bears S. 60° W., 5 lks. dist., mkd. T2N R5W S19 BT. Record S. 51° W., 5 lks. dist.

Remonumentation of Corners in T. 2 N., R. 5 W.

CHAINS

A pine, 12 ins. in diam., bears N. 64° W., 29 lks. dist. mkd. T2N R5W S18 BT. Record N. 64° W., 30 lks. dist.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 12 ins. in the ground and in a mound of stone $3\frac{1}{2}$ ft. base to brass cap mkd.

T2N R5W

S18	S17
S19	S20
1968	

Deposit the original stone in mound alongside the cor.

The cor. is located on steep W. slope of hill 6 chs. dist. E. of S. end of Moon Lake. In dense pine and aspen growth.

At the $\frac{1}{4}$ sec. cor. of secs. 18 and 19, marked with a sandstone, 20x12x8 ins., firmly set and plainly mkd. $\frac{1}{4}$ on N. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 18 ins. in the ground and in a collar of stone to brass cap. Raise a mound of stone $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high to N. Brass cap mkd.

T2N R5W

$\frac{1}{4}$ S18	
S19	
1968	

Deposit the original stone alongside the cor.

The cor. is located on gentle NE. slope of hill 100 lks. dist. N. of Moon Lake Road (oiled) that bears S. 80° E. by N. 80° W. approx. 20 chs. dist. W. of W. bank of Moon Lake. In sagebrush growth, no timber.

T. 2 N., R. 6 W.

Township 2 North, Range 6 West, Uintah Meridian, is located within the Ashley National Forest. The south bdy. was surveyed by Harvey D. Heist in 1903. The west bdy. was surveyed by James F. Trotter in 1903.

At the $\frac{1}{4}$ sec. cor. of sec. 32, on the S. bdy. of Tp., marked with a trachyte stone, 18x12x6 ins., firmly set and plainly mkd. $\frac{1}{4}$ on N. face.

522

Remonumentation of Corners in T. 2 N., R. 6 W.

CHAINS

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 18 ins. in the ground and in a collar of stone to brass cap. Raise a mound of stone 4 ft. base, 2 ft. high to N. Brass cap mkd.

T2N R6W

 $\frac{1}{2}$ S32

T1N R6W

1968

Deposit the original stone alongside the cor.

The cor. is located on S. slope of hill 60 lks. dist. E. of dry wash that drains S. approx. 12 chs. dist. N. of Rock Creek Road that bears S. 45° E. and N. 45° W. in sagebrush and chokecherry growth.

At the cor. of secs. 25, 30, 31 and 36, on the W. bdy. of Tp., marked with a sandstone, 18x10x8 ins., firmly set and plainly mkd. with 5 notches on N. and 1 on S. edge.

from which the remains of the original bearing tree

A ponderosa pine, 30 ins. in diam., bears S. 40° E., 264 lks. dist., mks. T2N R6W S31 BT.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins. in the ground and raise a mound of stone 4 ft. base, 2 ft. high to W. Brass cap mkd.

T2N

R7W R6W

S25 | S30S36 | S31

1968

Deposit the original stone alongside the cor.

The cor. is located on gentle SW. slope in bottom of Rock Creek Canyon that drains S. 60° E. approx. 8 chs. dist. N. of Rock Creek Road that bears E. and W. In sagebrush growth.

T. 2 N., R. 9 W.

Township 2 North, Range 9 West, Uintah Meridian, is located partially within the Ashley National Forest. The south bdy. was surveyed by Fred Johnson in 1903 and the subdivisional lines by John W. McKim in 1903.

Remonumentation of Corners in T. 2 N., R. 9 W.

CHAINS

At the township cor., T. 1 and 2 N., Rs. 8 and 9 W., marked with a trachyte stone, 20x14x12 ins., firmly set and plainly mkd. with 6 notches on all 4 sides.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 20 ins. in the ground and raise a mound of stone 5 ft. base, 3 ft. high to S. Brass cap mkd.

T2N
T9W R8W

S36 | S31
S1 | S6

T1N

1968

Deposit the original stone alongside the cor.

From which I mark

An aspen, 6 ins. in diam., bears N. 29° 30' E., 36 lks. dist., mkd. T2N R8W S31 BT.

A pine, 10 ins. in diam., bears S. 21° 30' E., 128 lks. dist., mkd. T1N R8W S6 BT.

An aspen, 5 ins. in diam., bears S. 31° 30' W., 41 lks. dist., mkd. T1N R9W S1 BT.

An aspen, 6 ins. in diam., bears N. 21° W., 13 lks. dist., mkd. T2N R9W S36 BT.

The cor. is located on SW. slope of hill approx. 800 feet above North Fork of Duchesne River. In aspen and scattered pine growth.

At the cor. of secs. 1, 2, 35 and 36, on the S. bdy. of Tp., marked with a sandstone, 15x8x6 ins., firmly set and plainly mkd. with 5 notches on W. and 1 on E. edge.

from which the remains of the original bearing tree

A ponderosa pine, 20 ins. in diam., bears S. 25° 30' W., 228 lks. dist., mkd. T1N R9W S2 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 8 ins. in the ground and in a mound of stone 3½ ft. base to brass cap mkd.

T2N R9W

S35 | S36
S2 | S1

T1N R9W

1968

Deposit the original stone in mound alongside the cor.

Remonumentation of Corners in T. 2 N., R. 9 W.

CHAINS

From which I mark

A ponderosa pine, 14 ins. in diam., bears N. 56° E., 39 lks. dist., mkd. T2N R9W S36 BT.

A lodge pole pine, 8 ins. in diam., bears S. 67° E., 30 lks. dist., mkd. T1N R9W S1 BT.

The cor. is located on E. slope of hill 100 lks. dist. W. of North Fork of Duchesne River that drains S. 25° E. in 3 strand fence line that bears N. 25° W. and S. 25° E. In scattered pine growth.

At the cor. of secs. 2, 3, 34 and 35, on the S. bdy. of Tp., marked with a quartzite stone, 18x14x6 ins., firmly set and plainly mkd. with 4 notches on W. and 2 on E. edge.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground and raise a mound of stone, 4 ft. base, 1½ ft. high to W. Brass cap mkd.

T2N R9W

S34 | S35

S3 | S2

T1N R9W

1968

Deposit the original stone alongside the cor.

From which I mark

An aspen, 5 ins. in diam., bears N. 32° 30' E., 20 lks. dist., mkd. T2N R9W S35 BT.

An aspen, 6 ins. in diam., bears S. 85° 30' E., 14 lks. dist., mkd. T1N R9W S2 BT.

An aspen, 6 ins. in diam., bears S. 67° W., 17 lks. dist., mkd. T1N R9W S3 BT.

An aspen, 8 ins. in diam., bears N. 41° W., 32 lks. dist., mkd. T2N R9W S34 BT.

The cor. is located on spur projecting N. 100 lks. dist. E. of logging road that bears N. and S. In dense aspen and pine growth.

At the cor. of secs. 3, 4, 33 and 34, on the S. bdy. of Tp., marked with a sandstone, 18x10x8 ins., firmly set and plainly mkd. with 3 notches on E. and W. edges.

At the cor. point

Remonumentation of Corners in T. 2 N., R. 9 W.

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins. in the ground and raise a mound of stone 3 ft. base, $1\frac{1}{2}$ ft. high to W. Brass cap mkd.

T2N R9W

S33|S34

S4|S3

T1N R9W

1968

Deposit the original stone alongside the cor.

The cor. is located on W. slope of hill 350 lks. dist. E. of trail road in draw that drains S. In small grassy clearing that is surrounded by dense aspen and pine growth.

At the $\frac{1}{4}$ sec. cor. of secs. 25 and 26, marked with a sandstone, 18x10x7 ins., firmly set and plainly mkd. $\frac{1}{4}$ on W. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins. in the ground and raise a mound of stone 4 ft. base, 2 ft. high to W. Brass cap mkd.

T2N R9W

 $\frac{1}{4}$

S26|S25

1968

Deposit the original stone alongside the cor.

From which I mark

A cedar, 6 ins. in diam., bears S. $37^{\circ} 30'$ E., 47 lks. dist., mkd. $\frac{1}{4}$ S25 BT.

A pine, 12 ins. in diam., bears N. $61^{\circ} 30'$ W., 68 lks. dist., mkd. $\frac{1}{4}$ S26 BT.

The cor. is located in bottom of Hades Creek Draw 4 chs. south of Hades Creek, 15 lks. wide, 1 ft. deep that drains S. 35° W. In dense aspen, pine and cedar growth.

At the $\frac{1}{4}$ sec. cor. of secs. 26 and 35, marked with a sandstone, 17x10x6 ins., firmly set and plainly mkd. $\frac{1}{4}$ on N. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 14 ins. in the ground and in a mound of stone $3\frac{1}{2}$ ft. base to brass cap mkd.

Remonumentation of Corners in T. 2 N., R. 9 W.

CHAINS

T2N R9W

$$\frac{1}{4} \frac{S26}{S35}$$

1968

Deposit the original stone in mound alongside the cor.

From which I mark

A pine, 14 ins. in diam., bears S. 89° E., 64 lks. dist., mkd. $\frac{1}{4}$ S35 BT.

A pine, 7 ins. in diam., bears N. 76° W., 13 lks. dist., mkd. $\frac{1}{4}$ S26 BT.

The cor. is located on E. slope of hill 4 chs. dist. W. of North Fork of Duchesne River that drains S. approx. 7 chs. dist. W. of Hades Creek Campground. In scattered pine and aspen growth.

At the $\frac{1}{4}$ sec. cor. of secs. 26 and 27, marked with a sandstone, 12x8x6 ins., firmly set and plainly mkd. $\frac{1}{4}$ on W. face.

No remaining evidence of the original bearing trees.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. in diam., 24 ins. in the ground and raise a mound of stone, 3 $\frac{1}{2}$ ft. base, 1 $\frac{1}{2}$ ft. high to W. Brass cap mkd.

T2N R9W

$$\frac{1}{4} \frac{S27}{S26}$$

1968

Deposit the original stone alongside the cor.

From which I mark

A pine, 15 ins. in diam., bears S. 59° E., 3 lks. dist., mkd. $\frac{1}{4}$ S26 BT.

A pine, 10 ins. in diam., bears N. 30° W., 46 lks. dist., mkd. $\frac{1}{4}$ S27 BT.

The cor. is located on gentle E. slope of hill 3 chs. dist. E. of edge of sagebrush flat in Duchesne River bottom that bears N. 30° W. and S. 30° E. at the cor. of old pole fence line projecting N. and E. In dense aspen and pine growth.

T. 2 N., R. 19 E.

Remonumentation of Corners in T. 2 N., R. 19 E.

CHAINS

Township 2 North, Range 19 East, Salt Lake Meridian, is located partially within the Ashley National Forest. The east bdy. and subdivisional lines were surveyed by Adolph Jessen in 1893. The east bdy. was resurveyed by Andrew Nelson in 1923.

At the $\frac{1}{4}$ sec. cor. of sec. 1, on the E. bdy. of Tp., marked with a sandstone, 18x9x4 ins., firmly set and plainly mkd. $\frac{1}{2}$ on W. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 14 ins. in the ground and in a mound of stone $3\frac{1}{2}$ ft. base to brass cap mkd.

T2N
R19E R20E

$\frac{1}{2}$
S1 |

1968

Deposit the original stone in mound alongside the cor.

The cor. is located on gentle N. slope of hill in old pole fence line that bears N. and S. 350 lks. dist. S. of trail road that bears E. and W. In scattered cedar growth.

At the cor. of secs. 2 and 3, marked with a sandstone 16x8x6 ins., firmly set and plainly mkd. with 5 notches on S. and 2 on E. edge.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 20 ins. in the ground and in a collar of stone to brass cap. Raise a mound of stone, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high to N. Brass cap mkd.

T2N R19E

S3 | S2
S11

1968

Deposit the original stone alongside the cor.

The cor. is located on very steep N. slope of hill facing Sheep Creek. In sagebrush and shadscale growth.

At the $\frac{1}{4}$ sec. cor. of secs. 2 and 3, marked with a sandstone, 14x8x5 ins., firmly set and plainly mkd. $\frac{1}{2}$ on W. face.

528

Remonumentation of Corners in T. 2 N., R. 19 E.

CHAINS

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins. in the ground and raise a mound of stone 3 ft. base, $1\frac{1}{2}$ ft. high to W. Brass cap mkd.

T2N R19E

$\frac{1}{4}$
S3|S2

1968

Deposit the original stone alongside the cor.

The cor. is located in bottom of Sheep Creek Canyon about 7 chs. dist. S. of creek that flows E. approx. 10 chs. dist. S. of Hwy. 44 that bears E. and W. 7 lks. dist. N. of netwire fence line that bears E. and W. In sagebrush growth.

T. 3 N., R. 19 E.

Township 3 North, Range 19 East, Salt Lake Meridian, is located along the north bdy. of the Ashley National Forest. The south bdy. was surveyed by Adolph Jessen in 1893.

At the $\frac{1}{4}$ sec. cor. of sec. 32, on the S. bdy. of Tp., marked with a quartzite stone, 18x15x6 ins., firmly set and plainly mkd. $\frac{1}{4}$ on N. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins. in the ground and raise a mound of stone, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high to N. Brass cap mkd.

T3N R19E

$\frac{1}{4}$ S32

T2N R19E

1968

Deposit the original stone alongside the cor.

The cor. is located on rocky broken S. slope of hill approx. 25 chs. dist. E. of Lodge Pole Creek that flows S. 45° E. In scattered cedar growth.

At the cor. of secs. 31 and 32, on the S. bdy. of Tp., marked with a sandstone, 18x12x5 ins., firmly set and plainly mkd. with 5 notches on E. and 1 on W. edge.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 20 ins. in the ground and raise a mound of stone, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high to N. Brass cap mkd.

Remonumentation of Corners in T. 2 N., R. 19 E.

CHAINS

T3N R19E

S31|S32

S6

T2N R19E

1968

Deposit the original stone alongside the cor.

The cor. is located on steep N. slope of hill approx. 15 chs. dist. S. of Lodge Pole Creek that flows S. 60° E. In sagebrush and shadscale growth.

At the $\frac{1}{2}$ sec. cor. of sec. 31, on the S. bdy. of Tp., marked with a sandstone, 18x10x2 ins., firmly set and plainly mkd. $\frac{1}{2}$ on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. in diam., 20 ins. in the ground and raise a mound of stone 3 $\frac{1}{2}$ ft. base, 1 $\frac{1}{2}$ ft. high to N. Brass cap mkd.

T3N R19E

 $\frac{1}{2}$ S31

T2N R19E

1968

Deposit the original stone alongside the cor.

The cor. is located on steep NW. slope of hill approx. 8 chs. dist. E. of wash in small canyon that drains N. 35° E. In scattered cedar growth.

CHAINS

Blank

Page

CERTIFICATE OF SURVEY

I, Ferrel D. Reynolds, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 15th day of February, 1961, I have remonumented corners in Tps. 1 N., Rs. 6, 8 and 9 W., Tps. 2 N., Rs. 1 E., 1, 4, 5, 6 and 9 W., Uintah Meridian and Tps. 2 and 3 N., R. 19 E.

of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

May 1, 1969
(Date)

Ferrel D. Reynolds
Surveying Technician

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

SUBMITTED FOR APPROVAL
Date SEP 10 1969

BUREAU OF LAND MANAGEMENT,
Washington, D. C.

The foregoing field notes of the remonumentation of corners in Tps. 1 N., Rs. 6, 8 and 9 W., Tps. 2 N., Rs. 1 E., 1, 4, 5, 6 and 9 W., of the Uintah Meridian and Tps. 2 and 3 N., R. 19 E., of the Salt Lake Meridian, Utah,

executed by Ferrel D. Reynolds, Surveying Technician, having been critically examined and found correct, are hereby approved.

AUG 9 1971
(Date)

Clark F. Hamm
Chief, Division of Cadastral Survey

CERTIFICATE OF TRANSCRIPT

~~I CERTIFY That the foregoing transcript of the field notes of the above described surveys in~~
~~, is a true copy of the original field notes.~~

(Date)

(Chief, Division of Engineering)