

Volume

#

R0594

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
ORIGINAL

FIELD NOTES
OF THE

RETRACEMENT BETWEEN SECTIONS 12 AND 13

A DEPENDENT RESURVEY BETWEEN SECTIONS 3 AND 4

AND

A SURVEY OF A PORTION OF THE SUBDIVISIONAL LINES

COMPLETING THE SUBDIVISION OF

TOWNSHIP 40 SOUTH, RANGE 1 EAST

Of the Salt Lake Meridian

In the State of Utah

EXECUTED BY

Milton R. Workman Cadastral Surveyor

Under special instructions dated April 19, 1974, approved April 22, 1974

_____ , which provided for the surveys included under U S Survey Group

Number 554 , and assignment instructions dated June 26, 1974

Survey commenced August 1, 1974

Survey completed August 27, 1974

INDEX DIAGRAM

Township 40 South, Range 1 East,

35						
34 6	34 5	23 4	2 3	2	1	
32	33	22	18		8	
33 7	31 8	21 9	10	17 11	7 12	
30	29		17	16	7	
31 18	29 17	16	15	14 14	6 13	
28	27		14	14	5	
19	27 20	21 21	22	13 23	4 24	
26	25	20	12	12	4	
30	24 29	20 28	27	11 26	3 25	
24		19	10	10		
31	32	1 33	84	9 35	36	

T. 40 S., R. 1 E., Salt Lake Meridian, Utah

CHAINS

The south boundary (Eighth Standard Parallel South) was surveyed by Thomas C. Rathbone and Lyman E. Bolinger in 1917. The west boundary (Salt Lake Meridian) was surveyed by Robert C. Yundt in 1948, and a portion retraced by George D. Voorhees in 1959. The east and north boundaries and a portion of the subdivisional lines were surveyed by Fred R. Chappell and Kenneth D. Witt in 1956.

The following field notes are those of a dependent resurvey between secs. 3 and 4, a retracement between secs. 32 and 33, and a survey of a portion of the subdivisional lines completing the subdivision of T. 40 S., R. 1 E., Salt Lake Meridian, Utah.

The survey was executed in accordance with the specifications set forth in the Manual of Surveying Instructions, 1973, and the Special Instructions for Group 554, Utah, dated April 19, 1974.

The direction of the lines of this survey were determined by reference to true meridians established on line by hour angle observations on Polaris. They were carried forward by sustained angulation, being supplemented by numerous other observations on Polaris taken throughout the progress of the survey.

The distances were determined by electronic measurement, with inaccessible topography scaled from U.S. Geological Survey quadrangle maps.

The geographic position of the southeast corner of the township, taken from the 1956 survey plat, is as follows:

Latitude 37° 16' 57" N. Longitude 111° 44' 30" W.

The mean magnetic declination is 15° 15' E.

Retracement of a Portion of the Subdivision,
T. 40 S., R. 1 E., Salt Lake Meridian, Utah

(Retracement of the survey executed by Fred R. Chappell
and Kenneth D. Witt in 1956)

From the standard cor. of secs. 32 and 33, on the S. bdy. of the Tp., monumented with an iron post, 2 ins. diam., firmly set in a mound of stone, with brass cap mkd. as described in the official record of the 1917 survey of the Eighth Standard Parallel South through T. 40 S., R. 1 E.

from which

A cedar, 15 ins. diam., bears N. 46° 30' E.,
65 lks. dist., mkd. SC T40S R1E S33 BT.

A pinon, 12 ins. diam., bears N. 30° W., 36 lks.
dist., mkd. SC T40S R1E S32 BT.

N. 0° 58' W., bet. secs. 32 and 33.

Retracement is for course and distance only; topography is essentially the same as recorded in the official record.

37.03

The witness $\frac{1}{4}$ sec. cor. of secs. 32 and 33, monumented

Retracement of a Portion of the Subdivision,
T. 40 S. R. 1 E. Salt Lake Merid'

CHAINS

with an iron post, $2\frac{1}{2}$ ins. diam., in a mound of stone, with brass cap mkd. as described in the official record of the 1956 survey of a portion of the subdivision in T. 40 S., R. 1 E. This cor. is remarked to function as an angle point only.

N. $0^{\circ} 04'$ W., beg. new measurement.

3.00 True point for the $\frac{1}{4}$ sec. cor. of secs. 32 and 33, falls on steep N. slope.

N. $0^{\circ} 04'$ W., beginning new measurement.

40.07 The cor. of secs. 28, 29, 32 and 33, monumented with an iron post, $2\frac{1}{2}$ ins. diam., extending 10 ins. above ground, in a collar of stone, with brass cap mkd. as described in the official record of the 1956 survey of a portion of the subdivision of T. 40 S., R. 1 E.

from which

A juniper, 12 ins. diam., bears S. $11^{\circ} 45'$ E.,
61 lks. dist., mkd. T40S R1E S33 BT.

A juniper, 15 ins. diam., bears N. $38^{\circ} 30'$ W.,
58 lks. dist., mkd. T40S R1E S29 BT.

Dependent Resurvey, Portion of the Subdivision,
T. 40 S., R. 1 E., Salt Lake Meridian, Utah

(Retracement of the survey executed by Fred R. Chappell
and Kenneth D. Witt in 1956)

From the true point for the cor. of secs. 3, 4, 9 and 10, from which its witness cor. bears S. $0^{\circ} 02'$ E., 0.20 chs. dist., monumented with an iron post, $2\frac{1}{2}$ ins. diam., firmly set in a mound of stone, with brass cap mkd. as described in the official record of the 1956 survey of a portion of the subdivision of T. 40 S., R. 1 E.

. $0^{\circ} 06'$ E., bet. secs. 3 and 4.

er broken land, desc. steep NE. slope.

9.20 raw, drains S. 60° E.; asc. ledgy SW. slope.

21.80 ocky point, projects S. 60° E.; desc. ledgy NE. slope.

31.00 ase of steep slope, bears SE. and N.; thence up W.
ide of Wahweap Canyon.

40.00 he $\frac{1}{4}$ sec. cor. of secs. 3 and 4, monumented with an
unmarked iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., protrud-
ing 6 ins. above ground. I marked the brass cap.

T40S R1E

$\frac{1}{4}$
S4|S3
1974

o other accessories.

or. located 2.00 chs. W. of wash in Wahweap Canyon.

62.00 ahweap Creek, 60 lks. wide, 2 ft. deep, small stream of
ater, drains SE.; asc SW. slope of canyon wall.

Dependent Resurvey, Portion of the Subdivision,
T. 40 S., R. 1 E., Salt Lake Meridian, Utah

CHAINS
79.36

The cor. of secs. 3, 4, 33 and 34, on the N. bdy. of the Tp., monumented with a brass tablet, 3½ ins. diam., cemented in sandstone, marked as described in the official record of the 1956 survey of the S. bdy. of T. 39 S., R. 1 E.

from which

A mound of stone, 4 ft. base, 4 ft. high, bears 3 lks. W. of tablet.

Portion of the Subdivision, T. 40 S., R. 1 E.,
Salt Lake Meridian, Utah

Beginning at the cor. of secs. 25, 26, 35 and 36, monumented with an iron post, 2½ ins. diam., firmly set in a mound of stone, with brass cap mkd. as described in the official record of the 1956 survey of a portion of the subdivision.

N. 0° 01' W., bet. secs. 25 and 26.

Over broken desert land; desc. along broken and ledgy W. slope, on E. wall of Wahweap Canyon.

35.50 Draw, drains W.; asc. ledgy SW. slope.

40.00 Point for the ¼ sec. cor. of secs. 25 and 26.

Set an iron post, 30 ins. long, 2½ ins. diam., 4 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T40S R1E
¼
S26|S25
1974

Asc. ledgy SW. slope.

51.00 Spur, slopes W.; desc. ledgy NW. slope.

63.20 Draw, drains W.; asc. S. slope.

78.40 Point, projects W.; desc. NW. slope.

78.61 Point selected for the witness cor. of secs. 23, 24, 25 and 26.

Set an iron post, 30 ins. long, 2½ ins. diam., on solid sandstone, over an X, in a mound of stone, 4 ft. base to top, with brass cap mkd.

W C
T40S R1E
S23|S24
S26|S25
1974

Cor. located at base of ledge, about 10 ft. high, facing NW.

80.00 Point for the cor. of secs. 23, 24, 25 and 26, falls on steep and ledgy NW. slope, and cannot be perpetuated.

Land, broken, ledgy.
Soil, rocky, sand.

Portion of the Subdivision, T. 40 S., R. 1 E.,
Salt Lake Meridian, Utah

CHAINS

Timber, juniper, pinon; undergrowth, none.

From the cor. of secs. 19, 24, 25 and 30, on the E. bdy. of the Tp., monumented with an iron post, 2½ ins. diam., firmly set in a mound of stone, with brass cap mkd. as described in the official record of the 1956 survey of the E. bdy. of T. 40 S., R. 1 E.

N. 89° 54' W., bet. secs. 24 and 25.

Over broken desert land; asc. broken and ledgy E. slope.

10.00 Crest of steep ascent, bears N. and S.; asc. gentle E. slope on bench top.

25.40 Dirt road, bears N. 10° E. and S. 10° W.; over bench top.

40.02 Point for the ¼ sec. cor. of secs. 24 and 25.

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground, to bedrock, in a mound of stone, 3 ft. base to top, with brass cap mkd.

T40S R1E

S24

S25

1974

Desc. gentle SW. slope on bench top.

77.80 Rim on E. side of Wahweap Canyon, bears NE. and SW.; desc. ledgy NW. slope.

80.04 True point for the cor. of secs. 23, 24, 25 and 26, from which its witness cor. bears S. 0° 01' E., 1.39 chs. dist.

Land, broken desert.

Soil, sand.

Timber, juniper, pinon; undergrowth, sagebrush, grass.

N. 0° 01' W., bet. secs. 23 and 24.

Over broken desert land on E. wall of Wahweap Canyon; desc. over broken and ledgy NW. slope.

6.00 Draw, drains W.; asc. SW. slope.

18.20 Spur, slopes N. 50° W.; desc. along irregular W. slope

31.00 Spur, slopes N. 30° W.; desc. ledgy N. slope.

39.60 Point selected for the witness ¼ sec. cor. of secs. 23 and 24.

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground, to bedrock, in a mound of stone, 3 ft. base to top, with brass cap mkd.

W C

T40S R1E

½

S23↑S24

1974

Portion of the Subdivision, T. 40 S., R. 1 E.,
Salt Lake Meridian, Utah

CHAINS

- 40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 23 and 24, falls in bottom of draw, which drains N. 75° W., and cannot be perpetuated. Asc. ledgy SW. slope.
- 51.50 Spur, slopes W.; desc. NW. slope.
- 59.40 Draw, drains S. 70° W.; asc. SW. slope.
- 62.30 Small spur, slopes S. 20° W.; desc. W. slope.
- 65.90 Draw, drains S. 20° W.; asc. ledgy and irregular S. slope.
- 80.00 Point for the cor. of secs. 13, 14, 23 and 24.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 4 ins. in the ground, to bedrock, in a mound of stone, 3 ft. base to top, with brass cap mkd.

T40S R1E
S14|S13
S23|S24
1974

Cor. located at base of ledge, about 50 ft. high, facing S.

Land, broken, ledgy.
Soil, rocky, sand.

Timber, juniper, pinon; undergrowth, grass, weeds.

From the cor. of secs. 13, 18, 19 and 24, on the E. bdy. of the Tp., monumented with an iron post, $2\frac{1}{2}$ ins. diam., extending 8 ins. above ground, with brass cap mkd. as described in the official record of the 1956 survey of the E. bdy. of T. 40 S., R. 1 E.

from which

A juniper, 12 ins. diam., bears N. $69^\circ 45'$ E., 62 lks. dist., mkd. T40S R2E S18 BT.

A juniper, 6 ins. diam., bears N. $19^\circ 45'$ W., 91 lks. dist., mkd. T40S R1E S13 BT.

N. $89^\circ 56'$ W., bet. secs. 13 and 24.

Over rolling land of Fourmile Bench, through juniper and pinon; along bulldozed road.

- 15.00 Bulldozed road changes bearing to SW.
- 39.91 Point for the $\frac{1}{4}$ sec. cor. of secs. 13 and 24.
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins. in the ground to bedrock, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T40S R1E
 $\frac{1}{4}$ S13
S24
1974

Cor. located 1.00 ch. S. of small draw.

- 44.30 Small draw, drains SW.

Portion of the Subdivision, T. 40 S., R. 1 E.,

55.00 Crest of descent, bears NE. and SW.; desc. NW. slope.

67.50 Draw, drains SW.; asc. SE. slope.

75.60 Point, projects S.; desc. along S. slope.

79.82 The corner of secs. 13, 14, 23 and 24.

Land, rolling, broken.

Soil, sand, rocky.

Timber, juniper, pinon; undergrowth, shadscale, grass, sagebrush.

N. 0° 01' W., bet. secs. 13 and 14.

Over broken land, on E. wall of Wahweap Canyon; asc. S. slope.

2.00 Point, projects W.; desc. along W. slope.

4.50 Small draw, drains S. 30° W.; asc. general SW. slope on W. edge of bench.

18.80 Top of ascent, bears E. and W.; desc. gentle N. slope on bench.

21.30 Crest of steep descent, bears NE. and SW.; desc. ledgy NW. slope into Tommy Smith Creek.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 13 and 14.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 14 ins. in the ground, in a mound of stone, 3 ft. base to top, with brass cap mkd.

T40S R1E

$\frac{1}{4}$

S14|S13

1974

Desc. NW. slope.

45.80 Tommy Smith Creek, dry, drains S. 80° W.; asc. ledgy SE. slope.

62.50 Rim of canyon, bears NE. and SW.; asc. gentle SE. slope on wide point.

80.00 Point for the cor. of secs. 11, 12, 13 and 14.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T40S R1E

S11|S12

S14|S13

1974

Land, broken.

Soil, rocky.

Timber, juniper, pinon; undergrowth, shadscale, grass, sagebrush.

Portion of the Subdivision, T. 40 S., R. 1 E.,
Salt Lake Meridian, Utah

CHAINS

From the cor. of secs. 7, 12, 13 and 18 on the E. bdy. of the Tp., monumented with an iron post, 2½ ins. diam., extending 18 ins. above ground, in a collar of stone, with brass cap mkd. as described in the official record of the 1956 survey of the E. bdy. of T. 40 S., R. 1 E.

N. 89° 52' W., bet. secs. 12 and 13.

Over broken desert land, on W. edge of Four Mile Bench; desc. gentle W. slope.

17.50 Crest of steep and ledgy descent, bears NE. and SW.; desc. along S. slope, in draw, which drains W.

36.00 Spur, slopes SW.; desc. SW. slope.

39.00 Small draw, drains NW.; asc. NE. slope.

39.91 Point for the ¼ sec. cor. of secs. 12 and 13.

Set an iron post, 30 ins. long, 2½ ins. diam., on solid sandstone, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T40S R1E
¼ $\frac{S12}{S13}$
1974

Asc. NE. slope.

44.50 Small spur, slopes N.; desc. steep and ledgy W. slope into Tommy Smith Creek Canyon.

63.00 Tommy Smith Creek, drains S.; also bulldozed trail; asc. ledgy E. slope.

78.00 Canyon rim, bears N. and S.; asc. gentle E. slope, on E. edge of Long Flat.

79.82 The cor. of secs. 11, 12, 13 and 14.

Land, broken, desert.

Soil, sandy, rocky.

Timber, juniper, pinon; undergrowth, shadscale, grass, Brigham tea.

N. 0° 12' W., bet. secs. 11 and 12.

Over broken desert land, through scattered juniper and pinon; along E. slope, on E. edge of Long Flat.

36.00 Small draw, drains E.

40.00 Point for the ¼ sec. cor. of secs. 11 and 12.

Set an iron post, 30 ins. long, 2½ ins. diam., 4 ins. in the ground, to bedrock, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T40S R1E
¼
S11|S12
1974

Continue along gentle E. slope on top of Long Flat.

Portion of the Subdivision, T. 40 S., R. 1 E.,
Salt Lake Meridian U

CHAINS

- 50.00 Enter dense pinon and juniper trees.
- 79.45 The cor. of secs. 1, 2, 11 and 12, monumented with an iron post, 2½ ins. diam., firmly set in a mound of stone, with brass cap mkd. as described in the official record of the 1956 survey of a portion of the subdivision of T. 40 S., R. 1 E.

From which

A pinon, 3 ins. diam., bears S. 84° E., 84 lks. dist., mkd. BT.

A pinon, 8 ins. diam., bears S. 17° W., 83 lks. dist., mkd. T40S R1E S11 BT.

Land, broken desert.

Soil, sand.

Timber, juniper, pinon; undergrowth, sagebrush, grass, weeds.

From the cor. of secs. 1, 6, 7 and 12, on the E. bdy. of the Tp., monumented with a brass tablet, cemented in barren sandstone, mkd. as described in the official record of the 1956 survey of the E. bdy. of T. 40 S., R. 1 E.

from which

A pinon, 14 ins. diam., bears S. 81° 30' E., 49 lks. dist., mkd. T40S R2E S7 BT.

A pinon, 6 ins. diam., bears S. 80° 15' W., 50 lks. dist., mkd. T40S R1E S12 BT.

S. 89° 52' W., bet. secs. 1 and 12.

Over broken desert land, on E. wall of Tommy Canyon; desc. along N. slope.

- 26.00 Spur, slopes NW.; desc. SW. slope.
- 33.10 Wash in Tommy Canyon, drains S. 15° E.; asc. steep and ledgy E. slope.
- 40.01 Point for the ¼ sec. cor. of secs. 1 and 12, falls on ledgy W. wall of Tommy Canyon and cannot be perpetuated.
- 43.10 Crest of ledgy ascent, bears N. and S.; thence over narrow point, which projects S.
- 43.34 Point selected for the witness ¼ sec. cor. of secs. 1 and 12.

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground, to bedrock, in a mound of stone, 4 ft. base to top, with brass cap mkd.

W C
T40S R1E
¼ $\frac{S 1}{S12}$

1974

Portion of the Subdivision, T. 40 S., R. 1 E.,
Salt Lake Meridian, Utah

CHAINS

- 44.00 E. crest of point, bears N. and S.; desc. W. slope.
48.70 Small draw, drains S.; asc. E. slope.
54.50 Small spur, slopes S.; desc. SW. slope.
58.20 Small draw, drains SE.; asc. NE. slope.
63.50 Crest of ascent, bears N. and S. irregularly; asc. gentle E. slope on top of Long Flat; enter thick timber.
80.02 The cor. of secs. 1, 2, 11 and 12.

Land, broken desert.
Soil, sand, rocky.
Timber, juniper, pinon; undergrowth, sagebrush, grass.

From the standard cor. of secs. 34 and 35, on the S. bdy. of the Tp., (Eighth Standard Parallel South) monumented with an iron post, 2 ins. diam., firmly set in a mound of stone, with brass cap mkd. as described in the official record of the 1917 survey of the Eighth Standard Parallel South through T. 40 S., R. 1 E.

N. 0° 01' W., bet. secs. 34 and 35.

Over broken and ledgy land of W. wall of Wahweap Canyon; asc. along E. slope.

- 25.00 Top of ascent on W. wall of canyon; desc. NE. slope.
37.10 Small spur, slopes E.; desc. along E. slope.
40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 34 and 35.

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 20 ins. in the ground, in a mound of stone, 3 ft. base to top, with brass cap mkd.

T40S R1E

$\frac{1}{4}$

S34|S35

1974

Continue along broken E. slope.

- 46.20 Small draw, drains S. 67° E.; asc. ledgy SE. slope.
68.70 Spur, slopes E.; desc. ledgy NE. slope.
74.00 Ledgy draw, drains E.; asc. SE. slope.
80.00 Point for the cor. of secs. 26, 27, 34 and 35.

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 4 ins. in the ground, to bedrock, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T40S R1E

S27|S26

S34|S35

1974

Land, broken, ledgy.
Soil, rocky.
Timber, none; undergrowth, grass weeds.

Portion of the Subdivision, T. 40 S., R. 1 E.,

From the cor. of secs. 25, 26, 35 and 36, previously described.

S. 89° 55' W., bet. secs. 26 and 35.

Over broken and ledgy breaks of E. wall of Wahweap Canyon; desc. W. slope.

15.00 Base of steep descent, bears N. and S. irregularly; desc. gentle W. slope in canyon bottom.

38.00 Wahweap Creek, drains S. 10° W., small seep of water; asc. E. slope.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 26 and 35.

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T40S R1E

$\frac{1}{4}$ $\frac{S26}{S35}$

1974

Asc. E. slope.

41.00 Base of ledge, bears N. and S.; asc. broken E. slope of W. wall of Wahweap Canyon.

58.30 Spur slopes SE.; asc. broken SE. slope.

80.00 The cor. of secs. 26, 27, 34 and 35.

Land, broken, ledgy.

Soil, rocky, sand.

Timber, none; undergrowth, grass, weeds.

West, bet. secs. 27 and 34.

Over broken W. wall of Wahweap Canyon; asc. ledgy SE. slope.

14.70 Rim of canyon, bears N. 30° E. and S. 30° W.; asc. gentle E. slope on bench, enter timber.

30.50 Small draw, drains S. 12° W.; continue over bench.

40.01 Point for the $\frac{1}{4}$ sec. cor. of secs. 27 and 34.

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 4 ins. in the ground, to bedrock, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T40S R1E

$\frac{1}{4}$ $\frac{S27}{S34}$

1974

Continue over bench.

49.00 Rim, bears N. and S.; desc. ledgy W. slope into draw.

69.50 wash in bottom of deep draw, drains S.; asc. ledgy E. slope.

80.02 The cor. of secs. 27, 28, 33 and 34, monumented with an

Portion of the Subdivision, T. 40 S., R. 1 E.,
Salt Lake Meridian, Utah

CHAINS

iron post, 1 in. diam., firmly set in large mound of stone, with brass cap mkd. as described in the official record of the 1956 survey of a portion of the subdivision of T. 40 S., R. 1 E.

Land, broken, ledgy.

Soil, rocky, sand.

Timber, juniper, pinon; undergrowth, grass, sagebrush.

From the cor. of secs. 26, 27, 34 and 35.

N. 0° 01' W., bet. secs. 26 and 27.

Over ledgy breaks of W. wall of Wahweap Canyon; asc. steep SE. slope.

12.00 Rim, bears NE. and SW.; thence along gentle E. slope on E. edge of bench.

30.50 Same rim, bears NW. and SE.; desc. ledgy NE. slope.

40.00 Point for the ¼ sec. cor. of secs. 26 and 27, falls in small draw, which drains E., and cannot be perpetuated. Desc. along ledgy E. slope.

40.27 Point selected for the witness ¼ sec. cor. of secs. 26 and 27.

Set an iron post, 30 ins. long, 2½ ins. diam., on solid sandstone, over an X, in a mound of stone, 4 ft. base to top, with brass cap mkd.

W C
T40S R1E
½
S27↓S26
1974

Continue along ledgy E. slope.

48.00 Draw, drains E.; asc. steep SE. slope.

55.00 Rim, bears N. 30° E. and S. 30° W.; thence along E. slope on W. edge of bench.

63.00 Same rim, bears N. 10° E. and SW.; desc. along E. slope.

73.00 Spur, slopes N. 40° E.; desc. N. slope.

76.80 Draw, drains N. 40° E.; desc. NE. slope.

80.00 Point for the cor. of secs. 22, 23, 26 and 27.

Set an iron post, 30 ins. long, 2½ ins. diam., 4 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T40S R1E
S22|S23
S27|S26
1974

Land, broken, ledgy.

Soil, sandy, rocky.

Timber, juniper, pinon; undergrowth, shadscale, sagebrush grass.

Portion of the Subdivision, T. 40 S., R. 1 E.,
Salt Lake Merid U

CHAINS

From the true point for the cor. of secs. 23, 24, 25 and 26, from which its witness cor. bears S. 0° 01' E., 1.39 chs. dist.

S. 89° 45' W., bet. secs. 23 and 26.

Over ledgy breaks of E. wall of Wahweap Canyon; desc. NW. slope.

- 31.50 Wash in small draw in bottom of canyon, drains S. 15° W.; asc. E. slope of small spur.
- 33.50 Low spur in canyon bottom, slopes S.; desc. gentle W. slope.
- 39.98 Point for the $\frac{1}{4}$ sec. cor. of secs. 23 and 26, falls in creek draining S. in bottom of Wahweap Canyon. Asc. E. slope in canyon.
- 41.76 Point selected for the witness $\frac{1}{4}$ sec. cor. of secs. 23 and 26.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground, in a collar of stone, with brass cap mkd.

W C
T40S R1E
 $\frac{1}{4}$ $\frac{S23}{S26}$ →
1974

Asc. gentle E. slope in canyon bottom.

- 58.00 Base of steep and ledgy ascent, bears N. and S.; asc. broken and ledgy E. slope of canyon wall.
- 74.70 Spur, slopes sharply NE.; desc. along N. slope.
- 76.80 Draw, drains NE.; asc. NE. slope.
- 79.96 The cor. of secs. 22, 23, 26 and 27.

Land, broken, ledgy.
Soil, rocky, sand.
Timber, scattered juniper, pinon; undergrowth, grass, weeds.

West, bet. secs. 22 and 27.

Over broken and ledgy W. wall of Wahweap Canyon; asc. NE. slope.

- 11.10 Point, projects S.; desc. NW. slope.
- 20.20 Draw, drains N.; asc. NE. slope.
- 23.50 Spur, slopes S.; desc. NW. slope.
- 28.30 Draw, drains N.; asc. NE. slope.
- 34.50 Point, projects S.; desc. NW. slope.
- 40.13 Point for the $\frac{1}{4}$ sec. cor. of secs. 22 and 27.

Portion of the Subdivision, T. 40 S., R. 1 E.,

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground, to bedrock, in a mound of stone, 3 ft. base to top, with brass cap mkd.

T40S R1E
 $\frac{1}{4}$ S22
 $\frac{1}{4}$ S27
 1974

Desc. NW. slope.

- 43.00 Draw, drains N.; asc. NE. slope.
- 48.10 Rim of canyon, bears S. 25° E. and W. irregularly; asc. NE. slope along rim.
- 54.50 Enter thick juniper and pinon on rolling land of Horse Flat.
- 80.26 The cor. of secs. 21, 22, 27 and 28, monumented with an iron post, 2½ ins. diam., firmly set in a mound of stone, with brass cap mkd. as described in the official record of the 1956 survey of a portion of the subdivision in T. 40 S., R. 1 E.
- Land, broken, ledgy.
 Soil, rocky, sand.
 Timber, juniper, pinon; undergrowth, shadscale, grass, sagebrush.
-
- From the cor. of secs. 22, 23, 26 and 27.
- N. 0° 01' W., bet. secs. 22 and 23.
- Over broken and ledgy breaks of W. wall of Wahweap Canyon; desc. NE. slope.
- 20.00 Spur, slopes N. 20° E.; desc. NW. slope.
- 28.70 Draw, drains N. 75° E.; asc. S. slope.
- 39.00 Spur, slopes S. 70° E.; asc. along E. slope.
- 40.00 Point for the ¼ sec. cor. of secs. 22 and 23.
- Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground, to bedrock, in a mound of stone, 3 ft. base to top, with brass cap mkd.
- T40S R1E
 $\frac{1}{4}$
 S22|S23
 1974
- Asc. along E. slope.
- 47.00 Spur, slopes W.; desc. NE. slope.
- 62.00 Draw, drains E.; asc. SE. slope.
- 80.00 Point for the cor. of secs. 14, 15, 22 and 23.
- Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground, to bedrock, in a mound of stone, 4 ft. base to top, with brass cap mkd.

Portion of the Subdivision, T. 40 S., R. 1 E.,
Salt Lake Meridian Utah

HAINS

T40S R1E
 $\frac{S15}{S22} | \frac{S14}{S23}$
 1974

Land, broken, ledgy.
 Soil, rocky, sand.
 Timber, juniper, pinon; undergrowth, grass, weeds.

From the cor. of secs. 13, 14, 23 and 24.

S. 89° 46' W., bet. secs. 14 and 23.

Over broken and ledgy land of breaks of E. wall of
 Wahweap Canyon; desc. SW. slope.

- 1.80 Draw, drains S.; asc. SE. slope.
- 7.30 Saddle on point, projecting SW.; desc. ledgy NW. slope.
- 26.00 Base of descent, bears N. and S.; thence over bed of
 creek in bottom of Wahweap Canyon, draining S.
- 35.00 Leave wash area; asc. SE. slope.
- 40.08 Point for the $\frac{1}{2}$ sec. cor. of secs. 14 and 23.
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 8 ins.
 in the ground to bedrock, in a mound of stone, 3 ft. base
 to top, with brass cap mkd.

T40S R1E
 $\frac{1}{2} \frac{S14}{S23}$
 1974

Cor. located on small hill in canyon bottom; thence over
 small bench.

- 65.00 Base of steep ascent, bears NE. and SW.; asc. ledgy SE.
 slope.
- 80.16 The cor. of secs. 14, 15, 22 and 23.
- Land, broken, ledgy.
 Soil, sand, rocky.
 Timber, scattered juniper, pinon; undergrowth, grass,
 weeds.

S. 89° 59' W., bet. secs. 15 and 22.

Over broken and ledgy land of W. wall of Wahweap Canyon;
 asc. SE. slope.

- 4.00 Crest of rim, bears NE. and SW.; thence over broken bench.
- 15.00 Same rim, bears N. 50° W. and S. 50° E.; desc. ledgy SW.
 slope.
- 20.00 Ravine, drains S.; asc. SE. slope.
- 26.80 Point, projects S.; desc. ledgy SW. slope.
- 40.13 Point for the $\frac{1}{2}$ sec. cor. of secs. 15 and 22.

Portion of the Subdivision, T. 40 S., R. 1 E.,

No. 11111, 11111, 11111

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 4 ins. in the ground, to bedrock in a mound of stone, 4 ft. base to top, with brass cap mkd.

T40S R1E

$$\frac{1}{4} \begin{array}{l} S15 \\ S22 \end{array}$$

1974

Desc. ledgy SW. slope.

48.00 Draw, drains S. 50° E.; asc. broken NE. slope.

57.00 Spur, slopes N.; desc. NW. slope.

60.60 Same draw, drains N. 40° E.; asc. ledgy SE. slope.

80.26 True point for the cor. of secs. 15, 16, 21 and 22, was determined to be on line bet. the ¼ sec. cor. of secs. 21 and 22 and the witness cor. and at record dist. from each cor. from which its witness cor. bears N. 0° 02' W., 2.54 chs. dist., monumented with an iron post, 2½ ins. diam., firmly set in a mound of stone, with brass cap mkd. as described in the official record of the 1956 survey of a portion of the subdivision in T. 40 S., R. 1 E.

Land, broken, ledgy.

Soil, rocky.

Timber, juniper, pinon; undergrowth, Brigham tea, grass, weeds.

From the cor. of secs. 14, 15, 22 and 23.

N. 0° 01' W., bet. secs. 14 and 15.

Over broken and ledgy breaks of W. wall of Wahweap Canyon; asc. SE. slope.

2.40 Spur, slopes N. 50° E.; desc. NE. slope.

19.00 Base of descent, bears NW. and SE.; thence over bed of creek in Wahweap Canyon bottom, which drains SE.

30.00 Base of ascent, bears N. 40° W. and S. 40° E.; asc. SW. slope of E. wall of canyon.

40.00 Point for the ¼ sec. cor. of secs. 14 and 15.

Set an iron post, 30 ins. long, 2½ ins. diam., 15 ins. in the ground, in a mound of stone, 3 ft. base to top, with brass cap mkd.

T40S R1E

$$\frac{1}{4} \begin{array}{l} S15|S14 \\ 1974 \end{array}$$

Asc. along W. slope.

52.30 Spur, slopes W.; desc. NW. slope.

62.00 Draw, drains S. 80° W.; asc. SW. slope.

67.00 Spur, slopes W.; desc. SW. slope.

72.00 Draw, drains S. 48° W.; asc. S. slope.

Portion of the Subdivision, T. 40 S., R. 1 E.,

CHAINS

80.00 Point for the cor. of secs. 10, 11, 14 and 15.

Set an iron post, 30 ins. long, 2½ ins. diam., 4 ins. in the ground, to bedrock, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T40S R1E
S10|S11
S15|S14
 1974

Land, broken, ledgy.
 Soil, sand, rocky.
 Timber, scattered juniper, pinon; undergrowth, grass, weeds.

From the cor. of secs. 11, 12, 13 and 14.

S. 89° 44' W., bet. secs. 11 and 14.

Over broken land, on S. edge of Long Flat, through pinon and juniper.

7.00 E. rim of draw, bears N. and S.; desc. E. slope.

16.60 Draw, drains S. 15° W.; asc. W. slope.

24.30 W. rim of draw, bears N. and S.; asc. gentle SE. slope, on Long Flat.

34.00 Top of ascent; desc. gentle W. slope.

40.10 Point for the ¼ sec. cor. of secs. 11 and 14.

Set an iron post, 30 ins. long, 2½ ins. diam., 4 ins. in the ground, to bedrock, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T40S R1E
 ¼ S11
S14
 1974

Desc. gentle W. slope on bench.

45.00 E. rim of draw, bears NW. and S.; desc. E. slope.

54.00 Draw, drains S. 10° W.; asc. W. slope.

60.30 W. rim of draw, bears N. 20° E. and S. 20° W.; over flat.

67.00 E. rim of Wahweap Canyon, bears N. and S.; desc. ledgy W. slope.

72.80 Ravine, drains S. 40° W.; thence along S. slope.

80.20 The cor. of secs. 10, 11, 14 and 15.

Land, broken.
 Soil, sand.
 Timber, juniper, pinon; undergrowth, shadscale, sagebrush, grass.

Portion of the Subdivision, T. 40 S., R. 1 E.,
Salt Lake Meridian Utah

CHAINS

- S. 89° 55' W., bet. secs. 10 and 15.
- Over broken and ledgy land, on E. breaks of Wahweap Canyon; along S. slope.
- 2.50 Slope changes; desc. ledgy SW. slope.
- 14.00 Base of descent, bears N. 15° W. and S. 15° E.; thence over bed of creek in Wahweap Canyon, draining S.
- 22.00 Base of ascent, bears N. 15° W. and S. 15° E.; asc. NE. slope of W. wall of canyon.
- 27.00 Spur, slopes N. 20° E.; asc. along N. slope.
- 35.00 Slope changes; asc. NE. slope.
- 40.13 Point for the $\frac{1}{4}$ sec. cor. of secs. 10 and 15.
- Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 20 ins. in the ground, in a mound of stone, 3 ft. base to top, with brass cap mkd.
- T40S R1E
 $\frac{1}{4}$ $\frac{S10}{S15}$
1974
- Cor. located at base of ledge facing E.
- Asc. NE. slope.
- 65.00 Rim of canyon wall, bears N. 76° W. and S. 76° E.; asc. gentle NE. slope, on Horse Flat.
- 80.26 True point for the cor. of secs. 9, 10, 15 and 16, was determined to be on line bet. the $\frac{1}{4}$ sec. cor. of secs. 9 and 10 and the witness cor. and at record dist. from each cor. from which its witness cor. bears S. 0° 02' E., 0.10 chs. dist., monumented with an iron post, firmly set in a mound of stone, with brass cap mkd. as described in the 1956 survey of a portion of the subdivision in T. 40 S., R. 1 E.
- from which
- A pinon, 8 ins. diam., bears N. 20° 45' E., 87 lks. dist., mkd. T40S R1E S10 BT.
- A pinon, 6 ins. diam., bears N. 30° 30' W., 34 lks. dist.; mkd. T40S R1E S9 BT.
- Land, broken, ledgy.
Soil, sand, rocky.
Timber, juniper, pinon; undergrowth, sagebrush, grass,
weeds.
- From the cor. of secs. 10, 11, 14 and 15.
- N. 0° 05' E., bet. secs. 10 and 11.
- Over broken and ledgy land of E. wall of Wahweap Canyon; asc. S. slope.
- 3.50 Point, bears N. and E.; thence along W. slope, on top of rim.
- 9.00 Rim, bears to NE.; desc. ledgy NW. slope.

Portion of the Subdivision, T. 40 S., R. 1 E.,
Salt Lake Meridian Uta

CHAINS

- 26.00 Draw, drains W.; thence along broken and irregular W. slope.
- 39.68 Point selected for the witness $\frac{1}{4}$ sec. cor. of secs. 10 and 11.
Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 4 ins. in the ground, in a mound of stone, 3 ft. base to top, with brass cap mkd.
- W C
T40S R1E
 $\frac{1}{4}$
S10 \uparrow S11
1974
- 39.92 Point for the $\frac{1}{4}$ sec. cor. of secs. 10 and 11, falls in wash, which drains W., and cannot be perpetuated. Asc. SW. slope.
- 47.50 Spur, slopes N. 43° W.; desc. irregular NW. slope.
- 57.50 Wash in mouth of draw, drains S. 76° W.; asc. SW. slope.
- 61.00 Spur, slopes S. 75° W.; desc. NW. slope.
- 72.50 Wash in bottom of Long Canyon, drains S. 70° W. from N. 20° E.; asc. SE. slope.
- 79.84 True point for the cor. of secs. 2, 3, 10 and 11, on line bet. its witness cor. which bears West 2.90 chs. dist., monumented with an iron post, $2\frac{1}{2}$ ins. diam., firmly set in a mound of stone, with brass cap mkd. as described in the 1956 survey of a portion of the subdivision in T. 40 S., R. 1 E. and the $\frac{1}{4}$ sec. cor. of secs. 2 and 11.
- from which
- A pinon, 3 ins. diam., bears S. $72^\circ 15'$ W., 43 lks. dist., mkd. X BT.
- Land, broken, ledgy.
Soil, rocky.
Timber, scattered juniper, pinon; undergrowth, shadscale, grass.
-
- N. $89^\circ 58'$ W., bet. secs. 3 and 10.
- Over broken and ledgy land of W. wall of Long Canyon; asc. SE. slope.
- 3.50 Point, projects S.; desc. W. slope.
- 6.20 Draw, drains S.; asc. W. slope.
- 14.00 W. rim of draw, bears N. and S.; thence over bench through dense juniper and pinon.
- 24.60 E. rim of Wahweap Canyon, bears NW. and SE.; desc. ledgy SW. slope.
- 35.50 Base of descent, bears N. 15° W. and S. 15° E.; thence

Portion of the Subdivision, T. 40 S., R. 1 E.,
 3rd 1/4 Sec. 3, 4, 9, 10, 27, 28, 33, 34

CHAINS

over bed of creek in Wahweap Canyon.

- 40.10 Point for the $\frac{1}{4}$ sec. cor. of secs. 3 and 10, falls in wash area and cannot be perpetuated.
- 40.50 Leave wash area; asc. W. slope.
- 41.05 Point selected for the witness $\frac{1}{4}$ sec. cor. of secs. 3 and 10.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 14 ins. in the ground, in a mound of stone, 3 ft. base to top, with brass cap mkd.

W C
T40S R1E

$\frac{1}{4}$ $\frac{S\ 3}{S10}$
1974

Cor. located on first small ledge above wash; asc. W. slope.

- 48.50 Spur, slopes S. 60° W.; desc. over SW. slope.
- 63.80 Draw, drains S. 70° E.; asc. NE. slope.
- 80.20 True point for the cor. of secs. 3, 4, 9, and 10, from which its witness cor. bears S. $0^\circ 02'$ E., 0.20 chs. dist., previously described.

Land, broken, ledgy.

Soil, sand, rocky.

Timber, juniper, pinon; undergrowth, shadscale, sagebrush, grass.

From the cor. of secs. 27, 28, 33 and 34, previously described.

N. $89^\circ 53'$ W., bet. secs. 28 and 33.

Over broken and ledgy breaks of W. wall of Wahweap Canyon asc. SE. slope.

- 15.50 Rim of canyon, bears NE. and S.; asc. gentle E. slope of bench, through dense juniper and pinon.
- 24.30 Crest of ascent on bench, bears N. and S.; desc. gentle W. slope.
- 34.20 Point selected for the witness $\frac{1}{4}$ sec. cor. of secs. 28 and 33.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam. 4 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.

W C
T40S R1E

$\frac{1}{4}$ $\frac{S28}{S33}$
1974

Portion of the Subdivision, T. 40 S., R. 1 E.,
Salt Lake Merid'a

CHAINS

- 34.30 Rim, bears N. 10° W. and S. 10° E.; desc. broken and ledgy W. slope.
- 40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 28 and 33, falls on broken and ledgy W. slope cannot be perpetuated.
- 46.60 Draw, drains S. 10° E.; asc. ledgy E. slope.
- 60.00 Rim, bears S. 28° W. and N. 28° E.; asc. gentle E. slope on top of Horse Flat.
- 80.56 The cor. of secs. 28, 29, 32 and 33, previously described.
Land, broken, ledgy.
Soil, sand, rocky.
Timber, juniper, pinon; undergrowth, shadscale, sagebrush.
-
- N. 0° 03' W., bet. secs. 28 and 29.
- Over rolling bench land on Horse Flat, through juniper and pinon.
- 7.90 Small draw, drains N. 68° E.
- 10.00 S. edge of reseeded area, leave timber.
- 40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 28 and 29.
Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 22 ins. in the ground, with brass cap mkd.
- T40S R1E
 $\frac{1}{4}$
S29|S28
1974
- Continue over reseeded area.
- 80.00 Point for the cor. of secs. 20, 21, 28 and 29.
Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins. in the ground, to bedrock, in a mound of stone, 3 ft. base, to top, with brass cap mkd.
- T40S R1E
S20|S21
S29|S28
1974
- Land, rolling.
Soil, sand.
Timber, juniper, pinon; railed; undergrowth, sagebrush, grass.
- From the cor. of secs. 21, 22, 27 and 28, previously described.
- N. 89° 51' W., bet. secs. 21 and 28.
- Over rolling land, across reseeded area on Horse Flat.
- 40.21 Point for the $\frac{1}{4}$ sec. cor. of secs. 21 and 28.
Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 22 ins. in the ground, with brass cap mkd.

Portion of the Subdivision, T. 40 S., R. 1 E.,
Salt Lake Meridian, Utah

CHAIN

T40S R1E
 $\frac{1}{4}$ $\frac{S21}{S28}$
 1974

Continue over reseeded area.

80.42 The cor. of secs. 20, 21, 28 and 29.

Land, rolling.

Soil, sand.

Timber, juniper, pinon, railed; undergrowth, sagebrush, grass.

N. 0° 18' E., bet. secs. 20 and 21.

Over rolling land on Horse Flat; desc. gentle NE. slope over reseeded area.

39.80 Point for the $\frac{1}{4}$ sec. cor. of secs. 20 and 21.

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 15 ins. in the ground, in a collar of stone, with brass cap mkd.

T40S R1E
 $\frac{1}{4}$
 S20|S21
 1974

Continue over reseeded area.

79.60 The cor. of secs. 16, 17, 20 and 21, monumented with an iron post, 2 $\frac{1}{2}$ ins. diam., firmly set in a mound of stone, with brass cap mkd. as described in the official record of the 1956 survey of a portion of the subdivision in T. 40 S., R. 1 E.

from which

A juniper, 12 ins. diam., bears N. 55° 30' E., 69 lks. dist., mkd. T40S R1E S16 BT.

A juniper, 12 ins. diam., bears S. 57° 30' E., 64 lks. dist., mkd. T40S R1E S21 BT.

Land, rolling.

Soil, sand.

Timber, railed, juniper, pinon; undergrowth, sagebrush, grass.

From the cor. of secs. 8, 9, 16 and 17, monumented with an iron post, 2 $\frac{1}{2}$ ins. diam., firmly set in a mound of stone, with brass cap mkd. as described in the official record of the 1956 survey of a portion of the subdivision in T. 40 S., R. 1 E.

from which

A pinon, 14 ins. diam., bears N. 44° 45' E., 92 lks. dist., mkd. T40S R1E S9 BT.

A pinon, 18 ins. diam., bears S. 41° 45' E., 38 lks. dist., mkd. T40S R1E S16 BT.

Portion of the Subdivision, T. 40 S., R. 1 E.,
Salt Lake Meridian, Utah

CHAINS

A pinon, 18 ins. diam., bears S. 15° 45' W., 49
lks. dist., mkd. T40S R1E S17 BT.

A pinon, 12 ins. diam., bears N. 9° W., 14
lks. dist., mkd. T40S R1E S8 BT.

N. 0° 03' W., bet. secs. 8 and 9.

Over rolling land on Horse Flat, across reseeded area.

34.00 S. rim of canyon, bears N. 78° E. and S. 78° W.; desc,
ledgy NW. slope.

38.40 Wash in canyon bottom, drains N. 65° E.; asc. ledgy SE.
slope.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 8 and 9, falls on
inaccessible ledges facing SE. and cannot be monumented.

42.00 N. rim of same canyon, bears N. 40° E. and S. 48° W.;
asc. SE. slope.

43.63 Point selected for the witness $\frac{1}{4}$ sec. cor. of secs. 8
and 9.

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., on solid
sandstone, 1 mound of stone, 4 ft. base to top, with
brass cap mkd.

W C
 $\frac{1}{4}$
S 8 | S 9

1974

Asc. SE. slope.

49.00 Rise, bears E. and W.; asc. gentle S. slope, enter
reseeded area.

76.00 Rise, bears E. and W.; desc. gentle N. slope.

80.00 Point for the cor. of secs. 4, 5, 8 and 9.

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T40S R1E
S 5 | S 4
S 8 | S 9
1974

Set steel fence post alongside the corner.

and, rolling.

Soil, sand.

timber, railed, juniper, pinon; undergrowth, sagebrush,
shadscale, grass.

from the true point for the cor. of secs. 3, 4, 9 and 10,
from which its witness cor. bears S. 0° 02' E., 0.20
chs. distance, previously described.

. 89° 59' W., bet. secs. 4 and 9.

er broken land, above N. rim of canyon; asc. NE. slope.

Portion of the Subdivision, T. 40 S., R. 1 E.,
Salt Lake Meridian, Utah

CHAINS

- 1.20 Spur, slopes N.; desc. NW. slope.
- 6.30 Ravine, drains N. 30° E.; asc. NE. slope.
- 18.00 Rise, slopes N.; desc. W. slope.
- 27.00 Ravine, drains N. 20° W.; asc. NE. slope.
- 39.78 Point selected for the witness $\frac{1}{4}$ sec. cor. of secs. 4 and 9.
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins. in the ground, in a collar of stone, to top, with brass cap mkd.
- W C
T40S R1E
 $\frac{1}{4} \leftarrow \frac{S 4}{S 9}$
1974
- 39.98 True point for the $\frac{1}{4}$ sec. cor. of secs. 4 and 9, falls in small ravine, which drains N. 30° E. and cannot be perpetuated. Asc. NE. slope, through juniper and pinon.
- 55.00 Enter reseeded area, bears NW. and SE., leave timber.
- 79.96 The cor. of secs. 4, 5, 8 and 9.
- Land, broken, rolling.
Soil, sand, rocky.
Timber, juniper, pinon; undergrowth, sagebrush, grass.
-
- N. 0° 04' E., bet. secs. 4 and 5.
- Over rolling land on Horse Flat, across reseeded area; desc. gentle N. slope.
- 39.00 Small draw, drains N. 80° E.; asc. gentle SE. slope.
- 40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 4 and 5.
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.
- T40S R1E
 $\frac{1}{4}$
S5|S4
1974
- Asc. gentle SE. slope.
- 50.80 Rise, bears E. and W.; desc. gentle N. slope.
- 79.22 The cor. of secs. 4, 5, 32 and 33, on the N. bdy. of the Tp., monumented with an iron post, firmly set in a mound of stone, with brass cap mkd. as described in the official record of the 1956 survey of the south boundary of T. 39 S., R. 1 E.
- Land, rolling.
Soil, sand.
Timber, railed juniper, pinon; undergrowth, sagebrush, grass.
-
- The true point for the cor. of secs. 29, 30, 31 and 32,

Portion of the Subdivision, T. 40 S., R. 1 E.,

CHAINS

was determined to be on the extension of the line from the $\frac{1}{4}$ sec. cor. of secs. 29 and 32 over the witness cor. and at record dist. from which its witness cor. bears N. $89^{\circ} 58' E.$, 0.59 chs. dist., monumented with an iron post, 1 in. diam., firmly set in a mound of stone, with brass cap mkd. as described in the official record of the 1956 survey of a portion of the subdivision in T. 40 S., R. 1 E.

S. $89^{\circ} 50' W.$, bet. secs. 30 and 31.

Over broken desert land, through medium growth juniper and pinon; asc. NE. slope.

- 4.50 Rim, bears NW. and SE.; thence over small bench.
- 21.00 Same rim, bears N. and S. irregularly; desc. steep and ledgy E. slope.
- 28.50 Draw, drains N. $5^{\circ} W.$; asc. ledgy NE. slope.
- 34.50 Spur, slopes N. $15^{\circ} W.$; desc. NW. slope.
- 39.00 Small draw, drains N. $20^{\circ} W.$; asc. along N. slope.
- 40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 30 and 31.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 8 ins. in the ground, to bedrock, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T40S R1E

$\frac{1}{4}$ $\frac{S30}{S31}$
1974

Asc. along N. slope.

- 45.00 Spur, slopes N.; desc. NW. slope.
- 61.00 Draw, drains N. $65^{\circ} W.$; asc. steep SW. slope.
- 79.50 Rim, bears NE. and SW.; thence over rocky point.
- 79.80 The cor. of secs. 25, 30, 31 and 36, on the W. bdy. of the Tp., (Salt Lake Meridian) monumented with an iron post, 2 ins. diam., firmly set in mound of stone, with brass cap mkd. as described in the official record of the 1948 survey of the Salt Lake Meridian, in T. 40 S.

from which

A juniper, 5 ins. diam., bears S. $39^{\circ} 45' E.$, 48 lks. dist., mkd. BT.

A juniper, 4 ins. diam., bears S. $32^{\circ} 30' W.$, 43 lks. dist., mkd. BT.

A juniper, 5 ins. diam., bears N. $27^{\circ} W.$, 66 lks. dist., mkd. BT.

and, broken.

oil, sand, rocky.

timber, juniper, pinion, undergrowth, sagebrush, grass, weeds.

from the true point for the cor. of secs. 29, 30, 31 and 2, from which its witness cor. bears N. $89^{\circ} 58' E.$, .59 chs. dist., previously described.

Portion of the Subdivision, T. 40 S., R. 1 E.,
Salt Lake Meridian, Utah

CHAINS

N. 0° 03' W., bet. secs. 29 and 30.

Over broken desert land, covered with medium growth of juniper and pinon; desc. NW. slope.

2.70 Draw, drains NW.; asc. SW. slope.

12.00 Spur, slopes NW.; desc. NE. slope.

18.50 Draw, drains N. 70° W.; asc. SW. slope.

30.80 Spur, slopes N. 50° W.; desc. N. slope.

37.40 Draw, drains N. 65° W.; asc. SW. slope.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 29 and 30.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins. in the ground, to bedrock, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T40S R1E

$\frac{1}{4}$

S30|S29

1974

Asc. SW. slope.

46.20 Spur, slopes N. 70° W.; desc. N. slope.

52.10 Draw, drains N. 85° W.; asc. SW. slope.

60.00 Spur, slopes W.; desc. NW. slope.

65.00 Draw, drains S. 40° W.; asc. SE. slope.

76.20 Spur, slopes E.; desc. gentle NE. slope.

80.00 Point for the cor. of secs. 19, 20, 29 and 30.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 8 ins. in the ground, to bedrock, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T40S R1E

S19|S20

S30|S29

1974

Land, broken, desert.

Soil, sand, rocky.

Timber, juniper, pinon; undergrowth, sagebrush, grass, weeds.

From the cor. of secs. 20, 21, 28 and 29, previously described.

S. 89° 57' W., bet. secs. 20 and 29.

Over rolling land on Horse Flat, across reseeded area.

39.80 Jeep trail, bears NW. and SE.

39.97 Point for the $\frac{1}{4}$ sec. cor. of secs. 20 and 29.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 16 ins.

Portion of the Subdivision, T. 40 S., R. 1 E.,
Salt Lake Meridian, Utah

CHAINS	in the ground, in a collar of stone, with brass cap mkd.
	T40S R1E $\frac{1}{4} \frac{S20}{S29}$ 1974
	Continue over reseeded area.
44.00	Leave reseeded area, enter timber.
60.00	Land becomes broken; desc. SW. slope.
69.70	Draw, drains SW.; asc. S. slope.
76.00	Ravine, drains S. 48° E.; asc. NE. slope.
79.94	The cor. of secs. 19, 20, 29 and 30.
	Land, rolling. Soil, sand. Timber, railed juniper, pinon; undergrowth, sagebrush, grass.
	S. 89° 47' W., bet. secs. 19 and 30.
	Over rolling land on Horse Flat, through juniper and pinon; asc. gentle SE. slope.
26.50	Small draw, drains SE.; asc. gentle SE. slope.
38.00	Enter sagebrush flat, leave timber.
40.00	Point for the $\frac{1}{4}$ sec. cor. of secs. 19 and 30.
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T40S R1E $\frac{1}{4} \frac{S19}{S30}$ 1974
	Desc. gentle E. slope, on Horse Flat.
66.00	Leave sagebrush flat, enter juniper and pinon.
79.74	The cor. of secs. 19, 24, 25 and 30, on the W. bdy. of the Tp., (Salt Lake Meridian) monumented with an iron post, 2 ins. diam., firmly set in a mound of stone, with brass cap mkd. as described in the official record of 1948 survey of the Salt Lake Meridian in T. 40 S.
	from which
	A pinon, 4 ins. diam., bears N. 11° E., 39 lks. dist., mkd. BT.
	A pinon, 5 ins. diam., bears S. 4° W., 81 lks. dist., mkd. BT.
	A juniper, 6 ins. diam., bears N. 37° 45' W., 67 lks. dist., mkd. BT.
	Land, rolling. Soil, sand. Timber, juniper, pinon; undergrowth, sagebrush, grass.

Portion of the Subdivision, T. 40 S., R. 1 E.,
Salt Lake Meridian, Utah

CHAINS

From the cor. of secs. 19, 20, 29 and 30.

N. 0° 03' W., bet. secs. 19 and 20.

Over rolling land on Horse Flat, through juniper and pinon; desc. NE. slope.

1.80 Small ravine, drains S. 40° E.; asc. gentle SE. slope.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 19 and 20.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground, in a collar of stone, with brass cap mkd.

T40S R1E

$\frac{1}{4}$

S19|S20

1974

Continue over Horse Flat.

41.00 Enter reseeded area, leave timber.

48.50 Jeep trail, bears NW. and SE.; desc. gentle N. slope.

80.00 Point for the cor. of secs. 17, 18, 19 and 20.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T40S R1E

S18|S17

S19|S20

1974

Set steel fence post alongside the corner.

Land, rolling.

Soil, sand.

Timber, juniper, pinon, railed; undergrowth, grass, sagebrush.

From the cor. of secs. 16, 17, 20 and 21.

N. 89° 48' W., bet. secs. 17 and 20.

Over rolling desert land on Horse Flat; asc. gentle NE. slope, across reseeded area.

2.90 Small wash, drains NE.

40.21 Point for the $\frac{1}{4}$ sec. cor. of secs. 17 and 20.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins. in the ground, in a mound of stone, 3 ft. base to top, with brass cap mkd.

T40S R1E

$\frac{1}{4}$ S17

S20

1974

Set steel fence post alongside corner.

80.42 The cor. of secs. 17, 18, 19 and 20.

Land, rolling desert.

Soil, sand.

Portion of the Subdivision, T. 40 S., R. 1 E.,
Salt Lake Meridian Utah

CHAINS

Timber, railed juniper, pinon; undergrowth, sagebrush,
grass.

West, bet secs. 18 and 19.

Over rolling desert land on Horse Flat; across reseeded
area.

6.00 Jeep trail, bears N. 30° E. and S. 30° W.

40.00 Point for the ¼ sec. cor. of secs. 18 and 19.

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins.
in the ground, in a collar of stone, with brass cap mkd.

$$\begin{array}{r} \text{T40S R1E} \\ \frac{\text{S18}}{\text{S19}} \\ \frac{1}{4} \\ 1974 \end{array}$$

60.50 Small draw, drains S. 50° W.

79.76 Intersect the W. bdy. of the Tp. (Salt Lake Meridian)

Point for the closing cor. of secs. 18 and 19.

Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins.
in the ground, with brass cap mkd.

$$\begin{array}{r} \text{T40S} \\ \text{R1W R1E} \\ \text{S13} \left| \frac{\text{S18}}{\text{S19}} \right. \text{CC} \\ 1974 \end{array}$$

From this point, the cor. of secs. 13, 18, 19 and 24, bear
South 1.34 chs. dist., monumented with an iron post, 2
ins. diam., firmly set in a mound of stone, with brass
cap mkd. as described in the 1948 survey of the Salt Lake
Meridian in T. 40 S.

from which

A pinon, 16 ins. diam., bears S. 54° E., 122
lks. dist., mkd. T40S R1E S19 BT.

A pinon, 18 ins. diam., bears S. 41° 45' W., 42
lks. dist., mkd. T40S R1E S24 BT.

A juniper, 4 ins. diam., bears N. 34° 15' W., 34
lks. dist., mkd. BT.

This cor. will now function as the cor. of secs. 13 and
24, T. 40 S., R. 1 W. only, and was remarked.

$$\begin{array}{r} \text{T40S} \\ \text{R1W R1E} \\ \frac{\text{S13}}{\text{S24}} \left| \text{S19} \right. \\ 1948 \\ 74 \end{array}$$

From the same point, the ¼ sec. cor. of secs. 13 and 18,
bears North 38.66 chs. dist. hereinafter described.

Portion of the Subdivision, T. 40 S., R. 1 E.,
Salt Lake Meridian, Utah

CHAINS

Land, rolling desert.
Soil, sand.
Timber, railed juniper, pinon; undergrowth, sagebrush,
grass.

From the cor. of secs. 17, 18, 19 and 20.

N. 0° 03' W., bet. secs. 17 and 18.

Over rolling land on Horse Flat, across reseeded area.

20.70 Jeep trail, bears N. 21° E. and S. 21° W.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 17 and 18.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins.
in the ground, in a collar of stone, with brass cap mkd.

T40S R1E

$\frac{1}{4}$
S18|S17
1974

Continue over Horse Flat.

49.50 Jeep trail, bears N. 30° W. and S. 30° E.

65.60 Wash, drains NE.

72.80 Wash, 3 ft. deep, 20 lks. wide, drains S. 82° E.

80.00 Point for the cor. of secs. 7, 8, 17 and 18.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam. 24 ins.
in the ground, in a collar of stone, with brass cap mkd.

T40S R1E

S 7|S 8
S18|S17
1974

Land, rolling.
Soil, sand.
Timber, railed juniper, pinon; undergrowth, sagebrush,
grass, weeds.

From the cor. of secs. 8, 9, 16 and 17, previously
described.

N. 89° 45' W., bet. secs. 8 and 17.

Over rolling land on Horse Flat, across reseeded area.

40.18 Point for the $\frac{1}{4}$ sec. cor. of secs. 8 and 17.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T40S R1E

$\frac{1}{4}$ $\frac{S 8}{S17}$
1974

Continue over Horse Flat.

Portion of the Subdivision, T. 40 S., R. 1 E.,
Salt Lake Meridian, Utah

CHAINS

- 46.10 Wash, 1 ft. deep, 30 lks. wide, drains N. 15° E.
 51.20 Wash, 2 ft. deep, 40 lks. wide, drains N. 60° E.
 59.80 Jeep trail, bears N. 70° E. and S. 70° W.
 80.36 The cor. of secs. 7, 8, 17 and 18.

Land, rolling.

Soil, sand.

Timber, railed juniper, pinion; undergrowth, sagebrush,
grass, weeds.

West, bet. secs. 7 and 18.

Over rolling land on Horse Flat, across reseeded area.

- 40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 7 and 18.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T40S R1E
 $\frac{1}{4}$ $\frac{S 7}{S18}$
 1974

Continue over Horse Flat.

- 79.70 Intersect the W. bdy. of the Tp. (Salt Lake Meridian)

Point for the closing cor. of secs. 7 and 18.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T40S
 R1W R1E
 $S12 \left| \frac{S 7}{S18} \right. CC$
 1974

From this point the cor. of secs. 7, 12, 13 and 18, bears
South 1.28 chs. dist., monumented with an iron post, 2
ins. diam., extending 8 ins. above ground, with brass cap
kd. as described in the official record of the 1948
survey of the Salt Lake Meridian in T. 40 S.

from which

A pinon, 10 ins. diam., bears N. 21° 30' E., 155
lks. dist., mkd. T40S R1E S7 BT.

A pinon, 6 ins. diam., bears S. 40° E., 60 lks.
dist., mkd. BT.

A juniper, 6 ins. diam., bears S. 38° 45' W., 108
lks. dist., mkd. BT.

A pinon, 8 ins. diam., bears N. 34° 15' W., 69
lks. dist., mkd. BT.

his cor. will now function as the cor. of secs. 12 and
13, T. 40 S., R. 1 W. only, and was remarked.

Portion of the Subdivision, T. 40 S., R. 1 E.,
Salt Lake Meridian

CHAINS

T40S
R1W R1E
— S12 | S18
S13 |
1948
74

From the same point the $\frac{1}{4}$ sec. cor. of secs. 7 and 12, bears North 38.72 chs. dist., hereinafter described.

Land, rolling.

Soil, sand.

Timber, railed juniper, pinon; undergrowth, sagebrush, grass.

Point for the W. $\frac{1}{4}$ sec. cor. of sec. 18, on the W. bdy. of the Tp., and midpoint bet. the closing cor. of secs. 18 and 19, and the closing cor. of secs. 7 and 18.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T40S
R1E
 $\frac{1}{4}$
R1W | S18
1974

From this point the $\frac{1}{4}$ sec. cor. of secs. 13 and 18, bears South 1.31 chs. dist., monumented with an iron post, 1 in. diam., firmly set in a mound of stone, with brass cap mkd. as described in the official record of the 1948 survey of the Salt Lake Meridian in T. 40 S.

from which

A juniper, 16 ins. diam., bears N. $18^{\circ} 45'$ E., 32 lks. dist., mkd. $\frac{1}{4}$ S18 BT.

A pinon, 4 ins. diam., bears S. 77° W., 27 lks. dist., mkd. BT.

This cor. will now function as the E. $\frac{1}{4}$ sec. cor. of sec. 13, T. 40 S., R. 1 W. only, and was remarked.

$\frac{1}{4}$
S13 |
|
1948
74

Land, rolling.

Soil, sand.

Timber, railed juniper, pinon; undergrowth, sagebrush, grass.

From the cor. of secs. 7, 8, 17 and 18.

N. $0^{\circ} 03'$ W., bet. secs. 7 and 8.

Over rolling land on Horse Flat, across reseeded area; asc. gentle SE. slope.

39.60 Rise, bears E. and W.; desc. gentle N. slope.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 7 and 8.

Portion of the Subdivision, T. 40 S., R. 1 E.,
Salt Lake Meridian, Utah

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T40S R1E

$$\frac{1}{4}$$

S7		S8
1974		

Desc. gentle N. slope.

75.50 Wash, 2 ft. deep, 30 lks. wide, drains N. 40° E.

80.00 Point for the cor. of secs. 5, 6, 7 and 8.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T40S R1E

$$\frac{S6}{S7} | \frac{S5}{S8}$$

1974

Land, rolling.

Soil, sand.

Timber, railed juniper, pinon; undergrowth, sagebrush, grass.

From the cor. of secs. 4, 5, 8 and 9.

N. 89° 42' W., bet. secs. 5 and 8.

Over rolling land on Horse Flat, across reseeded area; along gentle N. slope.

26.80 Jeep trail, bears N. and S.

40.14 Point for the ¼ sec. cor. of secs. 5 and 8.

Set an iron post, 30 ins. long, 2½ ins. diam., 4 ins. in the ground, to bedrock, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T40S R1E

$$\frac{1}{4} \frac{S5}{S8}$$

1974

Continue along gentle N. slope.

68.70 Wash, 3 ft. deep, 40 lks. wide, drains N. 10° E.

80.28 The cor. of secs. 5, 6, 7 and 8.

Land, rolling.

Soil, sand.

Timber, railed juniper, pinon; undergrowth, sagebrush, grass.

West, bet. secs. 6 and 7.

Over rolling land on Horse Flat, across reseeded area; asc. gentle E. slope.

40.00 Point for the ¼ sec. cor. of secs. 6 and 7.

Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in

Portion of the Subdivision, T. 40 S., R. 1 E.,
Salt Lake Meridian, Utah

CHAINS

the ground, in a collar of stone, with brass cap mkd.

T40S R1E
 $\frac{1}{4} \frac{S6}{S7}$
 1974

Asc. gentle E. slope.

79.70 Intersect the W. bdy. of the Tp. (Salt Lake Meridian)

Point for the closing cor. of secs. 6 and 7.

Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T40S
 R1W R1E
 $S1 \left| \frac{S6}{S7} \right. CC$
 1974

From this point the true point for the cor. of secs. 1, 6, 7 and 12, bears South 1.36 chs. dist., marked by a cross in sloping sandstone.

from which

A pinon, 12 ins. diam., bears N. 62° 15' E., 47 lks. dist., mkd. T40S R1E S6 BT.

A pinon, 10 ins. diam., bears S. 81° 30' W., 96 lks. dist., mkd. T40S R1W S12 BT.

A pinon, 4 ins. diam., bears N. 49° W., 41 lks. dist., mkd. BT.

From this cross the witness cor. of secs. 1, 6, 7 and 12, bears South 0.46 chs. dist., monumented with an iron post, 2 ins. diam., firmly set in a mound of stone, with brass cap mkd. as described in the official record of the 1948 survey of the Salt Lake Meridian in T. 40 S. This witness cor. will now function as the witness cor. of secs. 1 and 12, T. 40 S., R.1 W. only, and was remarked.

WC
 T40S
 R1W R1E
 $\frac{S1}{S12} \left| S7 \right.$
 1948
 74

From the same point the true point for the ¼ sec. cor. of secs. 1 and 6, bears North 38.64 chs. dist. and is witnessed South 2.80 chs. dist. hereinafter described.

Land, rolling.

Soil, sand.

Timber, railed juniper, pinon; undergrowth, sagebrush, grass.

Point for the W. ¼ sec. cor. of sec. 7, on the W. bdy. of the Tp., and midpoint bet. the closing cor. of secs. 7 and 18, and the closing cor. of secs. 6 and 7.

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in

Portion of the Subdivision, T. 40 S., R. 1 E.,

CHAINS

the ground, to bedrock, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T40S
R1E
R1W | $\frac{1}{4}$
| S 7
1974

From this point the $\frac{1}{4}$ sec. cor. of secs. 7 and 12, bears South 1.32 chs. dist., monumented with an iron post, 1 in. diam., firmly set in a mound of stone, with brass cap mkd. as described in the official record of the 1948 survey of the Salt Lake Meridian in T. 40 S.

from which

A pinon, 10 ins. diam., bears N. 87° E., 47 lks. dist., mkd. $\frac{1}{4}$ S7 BT.

A pinon, 8 ins. diam., bears N. 73° 45' W., 62 lks. dist., mkd. $\frac{1}{4}$ S12 BT.

This cor. will now function as the E. $\frac{1}{4}$ sec. cor. of sec. 12, T. 40 S., R. 1 W. only, and was remarked.

$\frac{1}{4}$
S12 |
1948
74

Point for the W. $\frac{1}{4}$ sec. cor. of sec. 6, on the W. bdy. of the Tp., at 40.00 chs. northing from the closing cor. of secs. 6 and 7, falls on inaccessible ledges and cannot be monumented.

From this point the true point for the $\frac{1}{4}$ sec. cor. of secs. 1 and 6, bears South 1.36 chs. dist., falls on inaccessible ledges and is not marked, from which its witness cor. bears South 2.80 chs. dist., monumented with an iron post, 1 in. diam., firmly set in a mound of stone, with brass cap mkd.

$\frac{1}{4}$
S1 ↑ S6
|
W C
1948

This witness cor. will continue to function as the witness cor. for the E. $\frac{1}{4}$ sec. cor. of sec. 1, T. 40 S., R. 1 W., and will also function as the witness cor. for the W. $\frac{1}{4}$ sec. cor. of sec. 6, T. 40 S., R. 1 E.

From the cor. of secs. 5, 6, 7 and 8.

N. 0° 16' E., bet. secs. 5 and 6.

Over rolling land on Horse Flat, across reseeded area; along gentle E. slope.

21.50 ise, bears E. and W.; desc. gentle NE. slope.

40.00 oint for the $\frac{1}{4}$ sec. cor. of secs. 5 and 6.

et an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 10 ins. in the ground, to bedrock, in a mound of stone, 3 ft. ase to top, with brass cap mkd.

Portion of the Subdivision, T. 40 S., R. 1 E.
Salt Lake Meridian, Utah

CHAINS

T40S R1E

 $\frac{1}{4}$
S 6 | S 5
1974

Desc. gentle NE. slope.

- 61.50 Wash, 3 ft. deep, 30 lks. wide, drains E.; asc. along gentle E. slope.
- 74.60 Wash, drains E.
- 78.65 The cor. of secs. 5, 6, 31 and 32, on the N. bdy. of the Tp., monumented with an iron post, $2\frac{1}{2}$ ins. diam., extending 6 ins. above ground, with brass cap mkd. as described in the official record of the 1956 survey of the S. bdy. of T. 39 S., R. 1 E.

from which

A pinon, 8 ins. diam., bears N. $38^{\circ} 30'$ E., 231 lks. dist., mkd. T39S R1E S32 BT.

A juniper, 12 ins. diam., bears S. $63^{\circ} 45'$ E., 61 lks. dist., mkd. T40S R1E S5 BT.

A pinon, 6 ins. diam., bears S. 74° W., 81 lks. dist., mkd. T40S R1E S6 BT.

Land, rolling.

Soil, sand.

Timber, railed juniper, pinon; undergrowth, sagebrush, grass.

Point for the N. $\frac{1}{4}$ sec. cor. of sec. 6, on the N. bdy. of the Tp., and at 40.00 chs. of westing from the cor. of secs. 5, 6, 31 and 32.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., on solid sandstone, over an X, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T39S R1W

 $\frac{1}{4}$ S 6
T40S R1E
1974

From this point, the cor. of T. 39 S., Rs. 1 W. and 1 E., bears East 6.39 chs. dist., monumented with an iron post, 3 ins. diam., extending 8 ins. above ground, with brass cap mkd. as described in the official record of the 1948 survey of a portion of the S. bdy. of Sec. 36, T. 39 S., R. 1 W.

from which

A pinon, 6 ins. diam., bears East, 56 lks. dist., mkd. BT.

A juniper, 12 ins. diam., bears N. $61^{\circ} 45'$ W., 37 lks. dist., mkd. T39S R1W S36 BT.

Portion of the Subdivision, T. 40 S., R. 1 E.,
Salt Lake Meridian, Utah

CHAINS

General Description

The land in the township varies from broken and ledgy canyons in the east portion, to rolling land, on Horse Flat in the west portion. The drainage is southerly with Wahweap Canyon draining most of the township. There are a few trail roads on Horse Flat, which have been mostly railed and reseeded.

The vegetation consists of juniper and pinon, with sagebrush, blackbrush and scattered bunch grass undergrowth. The soil is sandy loam and exposed sandstone. The only permanent water is a number of small seeps in Wahweap Canyon.

There are no permanent habitations in the township.

The average of a considerable number of readings over all parts of the township gives a value of $15^{\circ} 15'$ E. for the mean magnetic declination.

CERTIFICATE OF SURVEY

(I) ~~XXX~~, Milton R. Workman, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 19th day of April, 19 74, (I) ~~XXX~~ have surveyed a portion of the subdivisional lines, retraced between sections 32 and 33, and dependently resurveyed between sections 3 and 4, Township 40 South, Range 1 East

of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by (me), ~~XXX~~ and under (my) ~~XXX~~ direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

January 16, 1975 (Date) Milton R. Workman (Cadastral Surveyor)

CERTIFICATE OF APPROVAL

SUBMITTED FOR APPROVAL Date MAR 14 1975

BUREAU OF LAND MANAGEMENT Washington, D.C.

The foregoing field notes of the survey of a portion of ~~the portion~~ of the subdivisional lines, retraced between sections 32 and 33, and dependently resurveyed between sections 3 and 4, Township 40 South, Range 1 East, Salt Lake Merid Utah

executed by Milton R. Workman, Cadastral Surveyor having been critically examined and found correct, are hereby approved.

AUG 14 1975 (Date) J. J. [Signature] Acting (Chief, Division of Cadastral Survey)

CERTIFICATE OF TRANSCRIPT

~~I CERTIFY That the foregoing transcript of the field notes of the above described surveys in~~ is a true copy of the original field notes.

~~(Date) (Chief, Division of Cadastral Survey) 600-240-200~~

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

ORIGINAL
FIELD NOTES

OF

THE COMPLETION SURVEY

OF

THE SUBDIVISION

OF

TOWNSHIP 40 SOUTH, RANGE 2 EAST

Of the SALT LAKE Meridian,

In the State of UTAH.

EXECUTED BY

GLEN B. HATCH

SUPERVISORY CADASTRAL SURVEYOR

Under special instructions dated APRIL 19, 19 74, which provided for the surveys
included under Group Number 554, approved APRIL 22, 1974,
and assignment instructions dated JUNE 26, 19 74.

Survey commenced JULY 10, 19 74

Survey completed AUGUST 27, 19 74

INDEX DIAGRAM

Township 40 SOUTH, Range 2 EAST,

6 32	32 5 31	22 4 21	3 17	2	1 7
7 30	30 8 29	20 9	10 16	16 11 15	6 12 5
18 28	28 17 27	16	15 14	14 14 13	5 13 4
19 25	26 20 25	20 21 19	22 11	12 23 11	3 24 2
30 23	24 29	18 28 18	27 9	10 26 9	1 25
31	32	33	34	8 35	36

Completion Survey of the Subdivision of
T. 40 S., R. 2 E., Salt Lake Meridian, Utah

CHAINS

The boundaries of the township and a portion of the subdivis-
ional lines have been established by earlier surveys
as follows:

The south boundary (Eighth Standard Parallel South), the
east boundary and a portion of the subdivis-
ional lines were surveyed by Kenneth D. Witt in 1956. The west and
north boundaries were surveyed by Kenneth D. Witt and
Fred R. Chappell in 1956.

The following field notes are those of the completion sur-
vey of the subdivision of Township 40 South, Range 2 East,
Salt Lake Meridian, Utah.

The survey was executed in accordance with the specifica-
tions as set forth in the Manual of Surveying Instructions
1973, and the Special Instructions for Group 554, dated
April 19, 1974.

The direction of the lines of this survey were determined
by reference to true meridians established on line by
hour angle observations on Polaris. The lines were car-
ried forward by sustained angulation and checked by other
hour angle observations on Polaris. Distances were det-
ermined by chaining where possible; otherwise by trian-
gulation and traverse. On lines run by triangulation and
traverse, distances to items of topography were scaled
from U.S.G.S. "Four Mile Bench", 1968 quadrangle.

The geographic position of the southeast corner of the
township as shown on the accepted plat of the 1956 sur-
vey is as follows:

Latitude 37° 16' 57" N., Longitude 111° 37' 58" W.

The mean magnetic declination is 14° 45' East.

Beginning at the corner of secs. 25, 26, 35 and 36, mon-
umented with an iron post, 2½ ins. diam., extending 12
ins. above ground, with brass cap mkd.

T40S R2E

S26	S25
S35	S36

1956

from which the bearing trees mkd. in 1956

A pinion, 10 ins. diam., bears S. 72° W., 69 lks.
dist., mkd. T40SR2ES35BT.

A pinon, 13 ins. diam., bears N. 23° 30' W., 54
lks. dist., mkd. T40SR2ES26BT.

N. 0° 01' W., bet. secs. 25 and 26.

Over nearly level bench land through dense timber.

40.00

Point for the ¼ sec. cor. of secs. 25 and 26.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in
the ground, with brass cap mkd.

Completion Survey of the Subdivision of
T. 40 S. R. 2 E. Salt Lake Meridian Utah

CHAINS

T40S R2E

$$\frac{1}{4}$$

$$S26|S25$$

1974

80.00 Point for the cor. of secs. 23, 24, 25 and 26.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground to bedrock, with brass cap mkd.

T40S R2E

$$\frac{S23|S24}{S26|S25}$$

1974

from which

A juniper, 10 ins. diam., bears N. 65° E., 18 lks. dist., mkd. S24BT.

A juniper, 10 ins. diam., bears S. 65° E., 34 lks. dist., mkd. T40SR2ES25BT.

A juniper, 10 ins. diam., bears S. 60° W., 29 lks. dist., mkd. S26BT.

A juniper, 14 ins. diam., bears N. 20° W., 44 lks. dist., mkd. T40SR2ES23BT.

Land, nearly level bench.

Soil, sandy.

Timber, dense juniper and pinon.

Undergrowth, sagebrush, cacti and grass.

The true point for the cor. of secs. 19, 24, 25 and 30 on the E. bdy. of the tp. determined by extending the line from the $\frac{1}{4}$ sec. cor. of secs. 25 and 30 over the witness cor. and at record dist. from the witness cor. This point is also on line with and at record dist. from the witness cor. of secs. 19 and 24. The witness cor. bears South 4.34 chs. dist.; monumented with an iron post $2\frac{1}{2}$ ins. diam., set in a mound of stone, 4 ft. base to top, with brass cap kd.

T40S
R2E R3E
$$\frac{S24\uparrow S19}{S25|S30}$$
W C
1956. $89^\circ 57'$ W., bet. secs. 24 and 25.

By triangulation, asc. over broken and ledgy NE slope.

6.00 Rim of bench, bears N. 60° W. and S. 60° E.; thence over nearly level bench land through dense timber. End triangulation.39.93 Point for the $\frac{1}{4}$ sec. cor. of secs. 24 and 25.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 3 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

Completion Survey of the Subdivision of
T. 40 S. R. 2 E. Salt Lake Co. Utah

CHAINS

T40S R2E

$$\frac{1}{4} \frac{S24}{S25}$$

1974

from which

A pinon, 12 ins. diam., bears N. 85° E., 23½ lks.
dist., mkd. BT only.

A pinon, 12 ins. diam., bears S. 80° W., 64 lks.
dist., mkd. BT only.

71.75 Jeep trail, bears No. 21° W. and S. 21° E.

79.86 The cor. of secs. 23, 24, 25 and 26.

Land, broken E. 6.00 chs., nearly level bench W. 74.00
chs.

Soil, sandy, shallow.

Timber, dense juniper and pinon W. 74.00 chs.

Undergrowth, sagebrush, cacti and grass.

N. 0° 01' W., bet. secs. 23 and 24.

Over nearly level bench land through dense timber.

9.10 Jeep trail, bears S. 70° W. and N. 70° E. about 3.00 chs.
to junction with jeep trail bearing NW. and SE.

21.10 Jeep trail, bears N. 21° W. and S. 21° E.

40.00 Point for the ¼ sec. cor. of secs. 23 and 24.

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in
the ground to bedrock, with brass cap mkd.

T40S R2E

$$\frac{1}{4} \frac{S23|S24}{S25}$$

1974

from which

A pinon, 18 ins. diam., bears N. 60° E., 46½ lks.
dist., mkd. ¼S24BT.

A juniper, 10 ins. diam., bears N. 75° W., 82 lks.
dist., mkd. ¼S23BT.

58.00 Rim of bench, bears E. and curves N.; thence along
broken E. slope.66.00 Rim of bench, bears N. 40° E. and curves S.; thence
over nearly level bench land.

80.00 Point for the cor. of secs. 13, 14, 23 and 24.

Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins.
in the ground to bedrock, and in a mound of stone, 3 ft.
base to top, with brass cap mkd.

Completion Survey of the Subdivision of
T. 40 S. R. 2 E. Salt Lake Meridian Utah

CHAINS

T40S R2E

$$\frac{S14|S13}{S23|S24}$$

1974

from which

A juniper, 8 ins. diam., bears N. 25° E., 39 lks.
dist., mkd. S13BT.

A pinon, 8 ins. diam., bears S. 80° E., 34 lks.
dist., mkd. T40SR2ES24BT.

Land, nearly level bench.

Soil, shallow sand.

Timber, dense pinon and juniper.

Undergrowth, sagebrush, cacti and grass.

The true point for the cor. of secs. 13, 18, 19 and 24 on the E. bdy. of the tp. determined by extending the line from the $\frac{1}{4}$ sec. cor. of secs. 13 and 18 over the witness cor. and at record dist. from the witness cor. This point is also on line with and at record dist. from the witness¹ cor. of secs. 19 and 24. The witness cor bears north 0.53 chs. dist., monumented with an iron post, 2½ ins. diam., set in a mound of stone, 4 ft. base to top, with brass cap mkd.

W C
T40S
R2E R3E

$$\frac{S13|S18}{S24|S19}$$

1956

N. 89° 52' W., bet. secs. 13 and 24.

Over broken land through dense timber. By traverse and triangulation, desc. about 400 ft. over precipitous and broken SW. slope.

25.00 Wesses Canyon, drains irregularly S. 40° E.; asc. about 200 ft. over broken and ledgy SE. slope.

39.97 Point for the $\frac{1}{4}$ sec. cor. of secs. 13 and 24.

Over a cross (+), cut in solid sandstone, set an iron post, 30 ins. long, 2½ ins. diam., in a mound of stone, 4 ft. base to top, with brass cap mkd.

T40S R2E

$$\frac{1}{4} \frac{S13}{S24}$$

1974

Continue by triangulation, asc. about 200 ft. over broken and precipitous SE. changing to S. slope.

55.00 Rim of bench, curves N. 60° E. and S. 80° W.; thence over point of bench.

60.00 Rim of bench, curves N. 60° W. and S. 80° E.; desc. over broken SW. slope.

Completion Survey of the Subdivision of
T. 40 S. R. 2 E. Salt Lake Meridian, Utah

CHAINS

63.00	Head of ledgy draw, drains SE.; asc. broken SE. slope.
66.00	Rim of bench, bears N. 50° E. and curves S. 10° W., thence over level bench land. End triangulation.
79.94	The cor. of secs. 13, 14, 23 and 24. Land, broken bench land. Soil, shallow sand, exposed sandstone. Timber, dense pinon and juniper. Undergrowth, sagebrush, cacti and grass.
40.00	N. 0° 01' W., bet. secs. 13 and 14. Over nearly level bench land through dense timber. Point for the $\frac{1}{4}$ sec. cor. of secs. 13 and 14. Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins. in the ground to bedrock, with brass cap mkd. T40S R2E $\frac{1}{4}$ S14 S13 1974
70.00	Point of bench, curves S. 75° E. and S. 45° W.; desc. over broken N. slope.
77.00	Wash, drains N. 85° E., from S. 40° W.; asc. SE. slope.
80.00	Point for the cor. of secs. 11, 12, 13 and 14. Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 3 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd. T40S R2E <u>S11 S12</u> S14 S13 1974 Land, nearly level bench S. portion; broken N. portion. Soil, sandy, exposed sandstone. Timber, dense pinon and juniper. Undergrowth, sagebrush, cacti and grass.
	From the cor. of secs. 7, 12, 13 and 18, on the E. bdy. of the Tp., monumented with an iron post, $2\frac{1}{2}$ ins. diam., extending 10 ins. above ground, with brass cap mkd. T40S R2E R3E <u>S12 S7</u> S13 S18 1956 from which the bearing trees mkd. in 1956. A pinon, 16 ins. diam., bears S. 83° 45' E., 60 lks. dist., mkd. T40SR3ES18BT.

Completion Survey of the Subdivision of
T. 40 S. R. 2 E. Salt La

CHAINS

A pinon, 12 ins. diam., bears S. 19° W., 147 lks.
dist., mkd. T4OSR2ES13BT.

A pinon, 16 ins. diam., bears N. 15° 15' W., 51 lks.
dist., mkd. T4OSR2ES12BT.

N. 89° 51' W., bet. secs. 12 and 13.

Over broken bench land through dense timber.

- 14.00 Draw, drains S. 40° W.; asc. over gently rolling bench
land.
- 39.98 Point for the $\frac{1}{4}$ sec. cor. of secs. 12 and 13.
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins. in
the ground to bedrock, and in a mound of stone, $3\frac{1}{2}$ ft.
base to top, with brass cap mkd.
- T4OS R2E
- $\frac{1}{4} \frac{S12}{S13}$
- 1974
- Desc. over gently rolling bench land.
- 55.50 Rim of canyon, bears N. 55° E. and S. 55° W.; thence by
triangulation, desc. about 250 ft. over broken and ledgy
NW. slope.
- 66.50 Wash, in canyon, drains S. 10° W. from N. 60° E.; asc.
over SE. slope.
- 73.00 Point of spur, slopes S.; desc. SW. slope.
- 78.50 Wash, in Wesses Canyon, drains S. 45° E. from N.; asc.
SE. slope.
- 79.96 The cor. of secs. 11, 12, 13 and 14. End Triangulation.
- Land, broken bench.
Soil, rocky sand.
Timber, dense pinon and juniper.
Undergrowth, sagebrush, cacti and grass.

N. 0° 04' W., bet. secs. 11 and 12.

Over broken bench land through dense timber. By trian-
gulation, asc. along E. slope.

- 2.00 Top of ascent, slopes E.; desc. NE. slope.
- 5.00 Wash, in Wesses Canyon, drains S. 10° E.; asc. along W.
slope.
- 14.00 Top of ascent, slopes sharply W.; desc. along broken W.
slope.
- 19.00 Wash, in fork of Wesses Canyon, drains S. 17° W.; asc.
200 ft. over broken and precipitous SE. slope.
- 30.00 Rim of canyon, bears N. 30° E. and S. 30° W.; end trian-
gulation; thence over nearly level land.
- 39.88 Point for the $\frac{1}{4}$ sec. cor. of secs. 11 and 12.

Completion Survey of the Subdivision of
T. 40 S., R. 2 E., Salt Lake Meridian, Utah

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., over a cross (+), on solid sandstone, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T40S R2E

½
S11|S12

1974

from which

A pinon, 8 ins. diam., bears N. 80° E., 9½ lks. dist., mkd. ½S12BT.

A juniper, 4 ins. diam., bears S. 70° W., 7½ lks. dist., mkd. ½SBT.

79.76

The cor. of secs. 1, 2, 11 and 12, monumented with an iron post, 2½ ins. diam., extending 14 ins. above ground, with brass cap mkd.

T40S R2E

S2|S1
S11|S12

1956

Land, broken bench S. portion; nearly level N. portion.
Soil, sandy.

Timber, dense pinon and juniper.

Undergrowth, sagebrush, cacti and grass.

From the cor. of secs. 1, 6, 7 and 12, on the E. bdy. of the Tp., monumented with an iron post, 2½ ins. diam., extending 10 ins. above ground, with brass cap mkd.

T40S
R2E R3E

S1|S6
S12|S7

1956

from which the bearing trees mkd. in 1956

A juniper, 8 ins. diam., bears S. 45° 30' E., 12 lks. dist., mkd. T40SR3ES7BT.

A pinon, 16 ins. diam., bears S. 51° W., 81 lks. dist., mkd. T40SR2ES12BT.

S. 89° 59' W., bet. secs. 1 and 12.

Over nearly level bench land through dense timber.

26.00

Wash, drains S. 45° W.

39.60

Road, bears N. 67° W. and S. 67° E.

40.00

Point for the ¼ sec. cor. of secs. 1 and 12.

Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

Completion Survey of the Subdivision of
T. 40 S. R. 2 E. Salt Lake Meridian Utah

CHAINS

T40S R2E

$\frac{1}{4} \frac{S1}{S12}$

1974

from which

A pinon, 12 ins. diam., bears N. 199 lks. dist.,
mkd. $\frac{1}{4}$ S1BT.

A pinon, 10 ins. diam., bears S. 15° E., 37 lks.
dist., mkd. $\frac{1}{4}$ S12BT.

80.00 The cor. of secs. 1, 2, 11 and 12.

Land, nearly level bench.

Soil, sandy.

Timber, dense pinon and juniper.

Undergrowth, sagebrush, cacti and grass.

From the true point for the standard cor. of secs. 34 and
35, from which the witness standard cor. bears E., 0.81
chs. dist., monumented with an iron post, 2½ ins. diam.,
set in a mound of stone, 4 ft. base to top, with brass
cap mkd.

S C
T40S R2E

$\frac{S34|S35}{1956} \leftarrow \text{WC}$

N. 0° 01' W., bet. secs. 34 and 35.

Over broken land through dense timber. By triangulation,
desc. about 600 ft. over broken and precipitous NW. slope.

17.00 Fork of John Henry Canyon, drains S. 50° W.; asc. SE.
slope.

32.00 Top of ascent, slopes E., desc. along E. slope.

39.50 Small spur, slopes E. End triangulation; desc. over N.
slope.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 34 and 35.

Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in
the ground to bedrock, and in a mound of stone, 4 ft.
base to top, with brass cap mkd.

T40S R2E

$\frac{1}{4}$
S34|S35

1974

Thence by triangulation, desc. N. slope.

42.00 Small draw, drains E.; asc. about 500 ft. over broken and
precipitous SE. slope.

60.00 Rim of canyon, bears N. 85° E. and S. 85° W.; end trian-
gulation; asc. over gently rolling bench land.

Completion Survey of the Subdivision of
T. 40 S. R. 2 E. Salt Lake Meridian Utah

CHAINS

- 75.00 Top of ascent, bears E. and W.; desc. over gentle NE. slope.
- 80.00 Point for the cor. of secs. 26, 27, 34 and 35.
- Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.
- T40S R2E
- $\frac{S27|S26}{S34|S35}$
- 1974
- Land, broken, ledgy S. portion; rolling bench N. portion.
Soil, sandy, exposed sandstone.
Timber, dense pinon and juniper.
Undergrowth, sagebrush, serviceberry, cacti and grass.
- From the cor. of secs. 25, 26, 35 and 36.
- S. 89° 59' W., bet. secs. 26 and 35.
- Over nearly level bench land through dense timber.
- 39.92 Point for the ¼ sec. cor. of secs. 26 and 35.
- Set an iron post, 30 ins. long, 2½ ins. diam., 5 ins. in the ground to bedrock, and in a mound of stone, 5 ft. base to top, with brass cap mkd.
- T40S R2E
- $\frac{1}{4} \frac{S26}{S35}$
- 1974
- Thence by triangulation, desc. about 350 ft. over broken and ledgy W. slope.
- 56.00 Ledgy canyon, drains S. 25° W.; asc. broken SE. slope.
- 59.00 Point of small spur, slopes S.; desc. broken SW. slope.
- 63.00 Fork of John Henry Canyon, drains S. 25° E.; asc. about 350 ft. over broken and ledgy NE. slope.
- 71.00 Rim of canyon, bears N. 48° W. and S. 48° E.; asc. over NE. slope.
- 79.84 The cor. of secs. 26, 27, 34 and 35. End triangulation.
- Land, rolling and broken bench land.
Soil, rocky sand, exposed sandstone.
Timber, dense pinon and juniper.
Undergrowth, sagebrush, serviceberry, cacti and grasses.
-
- S. 89° 57' W. bet. secs. 27 and 34.
- Over rolling bench land through dense timber, asc. over NE. slope.
- 9.50 Top of ascent, bears N. and S.; desc. W. slope.

Completion Survey of the Subdivision of
T. 40 S., R. 2 E., Salt Lake Meridian, Utah

CHAINS	
33.50	Rim of canyon; top of ledge, 50 ft. high, bears N. 10° W. and S. 10° E.; desc. over precipitous and broken SW. slope.
39.92	Point for the $\frac{1}{4}$ sec. cor. of secs. 27 and 34. Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 12 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd. T40S R2E $\frac{S27}{\frac{1}{4} S34}$ 1974 Thence by triangulation, desc. over broken SW. slope.
49.50	Fork of John Henry Canyon; wash, 30 lks. wide, 4 ft. deep, drains S.
51.50	John Henry Canyon; wash, 50 lks. wide, 5 ft. deep, drains S. 30° E.; asc. over broken and precipitous NE. slope.
79.84	The true point for the cor. of secs. 27, 28, 33 and 34 was determined to be on line bet. the $\frac{1}{4}$ sec. cor. of secs. 27 and 28 and the witness cor. and at record dist. from each. The witness cor. bears S. 0° 02' E., 0.56 chs. dist., monumented with an iron post, $2\frac{1}{2}$ ins. diam., set in a mound of stone, 4 ft. base to top, with brass cap mkd. T40S R2E $\frac{S28 \uparrow S27}{S33 S34}$ W C 1956 Land, broken and rolling bench land. Soil, shallow sandy clay, exposed sandstone. Timber, medium dense pinon and juniper. Undergrowth, sagebrush, cacti and serviceberry.
40.00	From the cor. of secs. 26, 27, 34 and 35. N. 0° 01' W., bet. secs. 26 and 27. Over rolling bench land, through dense timber. Point for the $\frac{1}{4}$ sec. cor. of secs. 26 and 27. Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 8 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd. T40S R2E $\frac{\frac{1}{4}}{S27 S26}$ 1974
62.30	Jeep trail, bears E. and W.
80.00	Point for the cor. of secs. 22, 23, 26 and 27.

Completion Survey of the Subdivision of
T. 40 S. R. 2 E. Salt Lake Meridian Utah

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T40S R2E

$\frac{S22|S23}{S27|S26}$

1974

Land, rolling bench land.
Soil, sandy clay.
Timber, dense pinon and juniper.
Undergrowth, sagebrush, serviceberry, cacti and grasses.

From the cor. of secs. 23, 24, 25 and 26.

S. 89° 57' W., bet. secs. 23 and 26.

Over nearly level bench land through dense timber.

25.50 Jeep trail, bears N. 70° E. and S. 70° W.

39.96 Point for the ¼ sec. cor. of secs. 23 and 26.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T40S R2E

$\frac{1}{4} \frac{S23}{S26}$

1974

from which

A juniper, 4 ins. diam., bears N. 10° E., 7 lks. dist., mkd. BT only.

A juniper, 5 ins. diam., bears S. 1° W., 39 lks. dist., mkd. ¼S26BT.

75.00 Head of draw, drains N. 45° W.

79.92 The cor. of secs. 22, 23, 26 and 27.

Land, gently rolling bench land.
Soil, sandy clay.
Timber, dense pinon and juniper.
Undergrowth, sagebrush, cacti and serviceberry.

S. 89° 53' W., bet. secs. 22 and 27.

Over broken bench land through dense timber. By triangulation, desc. about 300 ft. over broken NW. slope.

10.00 Fork of John Henry Canyon, drains S. 30° W.; asc. about 300 ft. over broken SE. slope.

20.50 Rim of canyon, bears N. and S.; end triangulation; thence over gently rolling bench land.

39.85 Point for the ¼ sec. cor. of secs. 22 and 27.

Completion Survey of the Subdivision of
T. 40 S., R. 2 E., Salt Lake Meridian, Utah

Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T40S R2E

$\frac{1}{4} \frac{S22}{S27}$

1974

from which

A juniper, 12 ins. diam., bears S. 50° E., 43 lks. dist., mkd. ¼S27BT.

A juniper, 18 ins. diam., bears N. 66° W., 28 lks. dist., mkd. T40SR2E¼S22BT.

- 69.00 Enter sagebrush, edge bears NE. and SW.
73.50 Jeep trail, bears S. 12° E. and curves N. 55° W.
76.50 Enter dense timber, edge bears N. 35° W. and S. 35° E.
79.70 The cor. of secs. 21, 22, 27 and 28, monumented with an iron post, 2½ ins. diam., extending 8 ins. above ground, with brass cap mkd.

T40S R2E

$\frac{S21|S22}{S28|S27}$

1956

from which the bearing trees mkd. in 1956.

A pinon, 6 ins. diam., bears N. 37° E., 53 lks. dist., mkd. T40SR2ES22BT.

A pinon, 12 ins. diam., bears N. 46° W., 13 lks. dist., mkd. T40SR2ES21BT.

Land, broken, E. portion; rolling bench W. portion.
Soil, sandy clay.
Timber, dense pinon and juniper.
Undergrowth, sagebrush, blackbrush and cacti.

From the cor. of secs. 22, 23, 26 and 27.

N. 0° 01' W., bet. secs. 22 and 23.

Over broken bench land through dense timber. Desc. broken NE. slope.

- 10.00 Head of draw, drains S. 40° W.; asc. broken SE. slope.
18.00 Spur, slopes S. 40° W.; desc. NW. slope.
32.50 Draw, drains S. 40° W.; asc. broken SE. slope.
40.00 Point for the ¼ sec. cor. of secs. 22 and 23.

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

Completion Survey of the Subdivision of
T. 40 S., R. 2 E., Salt Lake Meridian, Utah

CHAINS

T40S R2E

$$\frac{1}{4} \text{ S22|S23}$$

1974

- 42.00 Spur, slopes S. 30° W.; thence along W. slope.
62.00 Draw, near head, drains S. 40° W.; asc. SE. slope.
73.50 Spur, slopes SW.; desc. NW. slope.
80.00 Point for the cor. of secs. 14, 15, 22 and 23.

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.

T40S R2E

$$\frac{\text{S15|S14}}{\text{S22|S23}}$$

1974

from which

A juniper stump, 3 ft. high, 24 ins. diam., bears S. 5° E., 3 lks. dist., mkd. S23BT.

A juniper, 12 ins. diam., bears N. 44° W., 66 lks. dist., mkd. S15BT.

Land, broken bench land.

Soil, sandy clay.

Timber, dense pinon and juniper.

Undergrowth, sagebrush, blackbrush, cacti and grasses.

From the cor. of secs. 13, 14, 23 and 24.

S. 89° 58' W., bet. secs. 14 and 23.

Over rolling bench land through dense timber.

- 22.50 Jeep trail, bears N. 21° W. and S. 21° E.

- 39.96 Point for the ¼ sec. cor. of secs. 14 and 23.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T40S R2E

$$\frac{1}{4} \frac{\text{S14}}{\text{S23}}$$

1974

from which

A juniper, 30 ins. diam., bears N. 83° 30' E., 33 lks. dist., mkd. ¼ S14BT.

A juniper, 16 ins. diam., bears S. 22° W., 49 lks. dist., mkd. ¼ S23BT.

Completion Survey of the Subdivision of
T. 40 S. R. 2 E. Salt Lake Meridian, Utah

CHAINS

60.50 Jeep trail, bears N. 80° W. and S. 75° E.

79.92 The cor. of secs. 14, 15, 22 and 23.

Land, gently rolling bench land.
Soil, sandy clay.
Timber, dense pinon and juniper.
Undergrowth, sagebrush, cacti and grasses.

S. 89° 49' W., bet. secs. 15 and 22.

Over rolling bench land through dense timber.

0.20 Wash, drains S. 40° W.

22.50 Wash, in fork of John Henry Canyon, drains S. 40° E.

39.87 Point for the 1/4 sec. cor. of secs. 15 and 22.

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

T40S R2E

1/4 S15
S22

1974

from which

A juniper, 20 ins. diam., bears S. 64° E., 51 lks. dist., mkd. 1/4S22BT.

A pinon, 12 ins. diam., bears N. 23° W., 14 lks. dist., mkd. 1/4S15BT.

79.74 The cor. of secs. 15, 16, 21 and 22, monumented with an iron post, 2 1/2 ins. diam., extending 8 ins. above ground, with brass cap mkd.

T40S R2E

S16|S15
S21|S22

1956

from which the bearing trees mkd. in 1956.

A pinon, 18 ins. diam., bears N. 20° 30' E., 65 lks. dist., mkd. T40SR2ES15BT.

A pinon, 10 ins. diam., bears S. 61° 15' E., 86 lks. dist., mkd T40SR2ES22BT.

A pinon, 20 ins. diam., bears N. 44° W., 61 lks. dist., mkd. T40SR2ES16BT.

Land, rolling bench land.
Soil, sandy clay.
Timber, dense pinon and juniper.
Undergrowth, sagebrush, cacti and scattered grass.

From the cor. of secs. 14, 15, 22 and 23.

N. 0° 01' W., bet. secs. 14 and 15.

Completion Survey of the Subdivision of
T. 40 S., R. 2 E., Salt Lake Meridian, Utah

CHAINS	
0.15	Over rolling bench land through dense timber. Wash, drains SW.
3.50	Jeep trail, bears E. and W.
11.00	Jeep trail, bears N. 61° W. and curves S.
40.00	Point for the $\frac{1}{4}$ sec. cor. of secs. 14 and 15. Set an iron post, 30 ins. long, 2½ ins. diam., 14 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.
	T40S R2E
	$\frac{1}{4}$ S15 S14
	1974
80.00	Point for the cor. of secs. 10, 11, 14 and 15. Set an iron post, 30 ins. long, 2½ ins. diam., over a cross (+), cut in solid stone, and in a mound of stone, 5 ft. base to top, with brass cap mkd.
	T40S R2E
	$\frac{S10 S11}{S15 S14}$
	1974
	Land, rolling bench land. Soil, sandy clay, Timber, dense pinon and juniper. Undergrowth, sagebrush and cacti.
	From the cor. of secs. 11, 12, 13 and 14. S. 89° 59' W., bet. secs. 11 and 14.
	Over broken land, through dense timber. By triangulation, asc. about 200 ft. over precipitous SE. slope.
14.00	Rim of canyon, bears S. and N. 15° E. End triangulation; thence over bench land.
39.97	Point for the $\frac{1}{4}$ sec. cor. of secs. 11 and 14. Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.
	T40S R2E
	$\frac{1}{4} \frac{S11}{S14}$
	1974
	from which A pinon, 16 ins. diam., bears N. 30° E., 9 lks. dist., mkd. $\frac{1}{4}$ S11BT. A juniper, 20 ins. diam., bears S. 50° E., 16 lks. mkd. $\frac{1}{4}$ S14BT.

Completion Survey of the Subdivision of
T. 40 S.. R. 2 E.. Salt Lake Meridian

CHAINS	
42.00	Jeep trail, bears N. 5° W. and S. 5° E.
79.94	The cor. of secs. 10, 11, 14 and 15. Land, broken E. portion; bench land W. portion. Soil, sandy clay. Timber, dense pinon and juniper. Undergrowth, sagebrush and cacti.
39.86	S. 89° 52' W., bet. secs. 10 and 15. Over nearly level bench land, through dense timber. Point for the ¼ sec. cor. of secs. 10 and 15. Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd. T40S R2E $\frac{1}{4} \frac{S10}{S15}$ 1974 from which A pinon, 12 ins. diam., bears S. 10° W., 94 lks. dist., mkd. ¼S15BT.
62.50	Leave dense timber, edge bears N. and S.
68.00	Enter dense timber, edge bears N. 10° E. and S. 10° W.
79.72	The cor. of secs. 9, 10, 15 and 16, monumented with an iron post, 2½ ins. diam., extending 8 ins. above ground, with brass cap mkd. T40S R2E $\frac{S9 S10}{S16 S15}$ 1956 from which the bearing trees mkd. in 1956 A pinon, 20 ins. diam., bears S. 8° 15' E., 59 lks. dist., mkd. T40SR2ES15BT. A pinon, 10 ins. diam., bears N. 87° 45' W., 86 lks. dist., mkd. T40SR2ES9BT. Land, nearly level bench. Soil, sandy clay. Timber, dense pinon and juniper. Undergrowth, scattered sagebrush and cacti.
39.93	From the cor. of secs. 10, 11, 14 and 15. N. 0° 04' W., bet. secs. 10 and 11. Over nearly level bench land, through dense timber. Point for the ¼ sec. cor. of secs. 10 and 11.

Completion Survey of the Subdivision of
T. 40 S., R. 2 E., Salt Lake Meridian. Utah

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T40S R2E

$$\frac{1}{4}$$
 S10|S11

1974

from which

A pinon, 6 ins. diam., bears N. 88° E., $66\frac{1}{2}$ lks. dist., mkd. BT only.

A juniper, 30 ins. diam., bears S. 88° W., $36\frac{1}{2}$ lks. dist., mkd. $\frac{1}{4}$ S10BT.

76.50 Trail road, bears N. 63° E. and S. 63° W.

79.86 The cor. of secs. 2, 3, 10 and 11, monumented with an iron post, $2\frac{1}{2}$ ins. diam., extending 10 ins. above ground, with brass cap mkd.

T40S R2E

$$\frac{S3|S2}{S10|S11}$$

1956

from which the bearing trees mkd. in 1956.

A pinon, 20 ins. diam., bears S. $79^\circ 15'$ E., 108 lks. dist., mkd. T40SR2ES11BT.

A pinon, 12 ins. diam., bears N. $37^\circ 15'$ W., 107 lks. dist., mkd. T40SR2ES3BT.

Land, nearly level bench.

Soil, sandy clay.

Timber, dense pinon and juniper.

Undergrowth, sagebrush and cacti.

S. $89^\circ 59'$ W., bet. secs. 3 and 10.

Over rolling bench land, through dense timber.

39.82 Point for the $\frac{1}{4}$ sec. cor. of secs. 3 and 10.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 4 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T40S R2E

$$\frac{1}{4} \frac{S3}{S10}$$

1974

66.00 Draw, drains N. 30° W.

79.64 The cor. of secs. 3, 4, 9 and 10, monumented with an iron post, $2\frac{1}{2}$ ins. diam., extending 10 ins. above ground, with brass cap mkd.

Completion Survey of the Subdivision of
T. 40 S., R. 2 E., Salt Lake Meridian, Utah

CHAINS

T40S R2E

$\frac{S4|S3}{S9|S10}$

1956

from which the bearing trees mkd. in 1956.

A pinon, 10 ins. diam., bears N. 46° 45' E., 89 lks. dist., mkd. T40SR2ES3BT.

A pinon, 14 ins. diam., bears N. 37° 15' W., 41 lks. dist., mkd. T40SR2ES4BT.

Land, rolling bench.
Soil, sandy clay.
Timber, dense pinon and juniper
ndergrowth, sagebrush and cacti.

From the true point for the cor. of secs. 27, 28, 33 and 34, previously described.

. 89° 58' W., bet. secs. 28 and 33.

Over rolling bench land, through dense timber.

40.06 Point for the $\frac{1}{4}$ sec. cor. of secs. 28 and 33.

Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground to bedrock, and in a mound of stone, 4 ft. ase to top, with brass cap mkd.

T40S R2E

$\frac{\frac{1}{4} S28}{S33}$

1974

45.00 Leave dense timber, edge bears S. 65° W. and N. 65° E.

54.30 Enter dense timber, edge bears N. and S.

61.00 Jeep trail, bears N. and S., desc. over NW. slope.

80.12 The cor. of secs. 28, 29, 32 and 33, monumented with an iron post, 2½ ins. diam., set in a mound of stone, 3 ft. base, 15 ins. high, with brass cap mkd.

T40S R2E

$\frac{S29|S28}{S32|S33}$

1956

Land, rolling bench.
Soil, sandy clay.
Timber, dense pinon and juniper.
Undergrowth, sagebrush, cacti and grasses

N. 0° 03' W., bet. secs. 28 and 29.

Over broken bench land through dense timber. Desc. NW. slope.

1.00 Small draw, drains irregularly N.

Completion Survey of the Subdivision of
T. 40 S., R. 2 E., Salt Lake Meridian, Utah

CHAINS	
35.00	Top of ascent, bears E. and W.; desc. gentle N. slope.
40.00	<p>Point for the $\frac{1}{4}$ sec. cor. of secs. 28 and 29.</p> <p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.</p> <p style="text-align: center;">T40S R2E</p> <p style="text-align: center;">$\frac{1}{4}$ S29 S28</p> <p style="text-align: center;">1974</p>
52.00	Head of draw, drains W.
68.00	Low spur, slopes W.
74.00	Draw, drains W.
80.00	<p>Point for the cor. of secs. 20, 21, 28 and 29.</p> <p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.</p> <p style="text-align: center;">T40S R2E</p> <p style="text-align: center;"><u>S20 S21</u> <u>S29 S28</u></p> <p style="text-align: center;">1974</p> <p>Land, broken bench. Soil, rocky sandy clay. Timber, dense pinon and juniper. Undergrowth, sagebrush and cacti.</p>
	From the cor. of secs. 21, 22, 27 and 28.
	N. $89^{\circ} 58'$ W., bet. secs. 21 and 28.
	Over broken bench land, through dense timber.
11.00	Rim of John Henry Canyon, bears N. 25° W. and curves S.; desc. over broken SW. slope.
28.00	John Henry Canyon, drains S. 30° E.; asc. broken NE. slope.
39.00	Point of spur, slopes N.
40.05	<p>Point for the $\frac{1}{4}$ sec. cor. of secs. 21 and 28.</p> <p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., over a cross (+), cut in solid sandstone, and in a mound of stone, 5 ft. base to top, with brass cap mkd.</p> <p style="text-align: center;">T40S R2E</p> <p style="text-align: center;">$\frac{1}{4}$ <u>S21</u> S28</p> <p style="text-align: center;">1974</p>
42.00	Small draw, drains N. 30° E.

Completion Survey of the Subdivision of
T. 40 S. R. 2 E. Salt Lake Meridian Utah

CHAINS

66.50 Jeep trail, bears N. 12° W. and S. 12° E.

80.10 The cor. of secs. 20, 21, 28 and 29.

Land, broken bench.
Soil, sandy clay.
Timber, dense pinon and juniper.
Undergrowth, sagebrush and cacti.

N. 0° 06' E., bet. secs. 20 and 21.

Over rolling bench land through dense timber.

38.50 Jeep trail, bears S. 22° E. and curves N.

39.96 Point for the $\frac{1}{4}$ sec. cor. of secs. 20 and 21.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.

T40S R2E

$\frac{1}{4}$
S20|S21

1974

41.50 Same jeep trail, bears N. 25° E. and curves S.

49.00 Same jeep trail, bears N. 27° W. and S. 27° E.

54.50 Jeep trail, bears N. 76° W. and S. 76° E.

70.00 Trail road, bears N. 45° E. and S. 45° W.

79.92 The cor. of secs. 16, 17, 20 and 21, monumented with an iron post, $2\frac{1}{2}$ ins. diam., extending 12 ins. above ground, with brass cap mkd.

T40S R2E

S17|S16
S20|S21

1956

from which the bearing trees mkd. in 1956.

A pinon, 10 ins. diam., bears S. 79° 15' E., 79 lks. dist., mkd. T4OSR2ES21BT.

A juniper, 8 ins. diam., bears S. 46° 45' W., 24 lks. dist., mkd. T4OSR2ES20BT.

A juniper, 16 ins. diam., bears N. 60° W., 96 lks. dist., mkd. T4OSR2ES17BT.

Land, rolling bench
Soil, sandy clay.
Timber, dense pinon and juniper.
Undergrowth, sagebrush and cacti.

From the cor. of secs. 8, 9, 16 and 17, monumented with an iron post, $2\frac{1}{2}$ ins. diam., extending 10 ins. above ground, with brass cap mkd.

Completion Survey of the Subdivision of
T. 40 S., R. 2 E., Salt Lake Meridian, Utah

CHAINS

T40S R2E

$$\frac{S8|S9}{S17|S16}$$

1956

from which the bearing trees mkd. in 1956.

A juniper, 8 ins. diam., bears S. 10° 45' E., 27
lks. dist., mkd. T40SR2ES16BT.

A juniper, 10 ins. diam., bears N. 19° 45' W., 14
lks. dist., mkd. T40SR2ES8BT.

N. 0° 03' W., bet. secs. 8 and 9.

Over rolling bench land through dense timber.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 8 and 9.

Set an iron post, 30 ins. long, 2½ ins. diam., 4 ins. in
the ground to bedrock, and in a mound of stone, 4 ft.
base to top, with brass cap mkd.

T40S R2E

$$\frac{\frac{1}{4}}{S8|S9}$$

1974

from which

A juniper, 12 ins. diam., bears S. 5° 30' W., 26½
lks. dist., mkd. $\frac{1}{4}$ S8BT.

80.00 Point for the cor. of secs. 4, 5, 8 and 9.

Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in
the ground to bedrock, and in a mound of stone, 4 ft.
base to top, with brass cap mkd.

T40S R2E

$$\frac{S5|S4}{S8|S9}$$

1974

from which

A pinon, 14 ins. diam., bears N. 45° E., 59 lks.
dist., mkd. T40SR2ES4BT.

A pinon, 8 ins. diam., bears S. 65° E., 36 lks.
dist., mkd. S9BT.

A juniper, 36 ins. diam., bears N. 70° W., 7 lks.
dist., mkd., T40SR2ES5BT.

Land, rolling bench.

Soil, sandy clay.

Timber, dense pinon and juniper.

Undergrowth, sagebrush and cacti.

From the cor. of secs. 3, 4, 9 and 10.

Completion Survey of the Subdivision of
T. 40 S., R. 2 E., Salt Lake Meridian, Utah

CHAINS	
	S. 89° 57' W., bet. secs. 4 and 9. Over rolling bench land through dense timber.
38.75	Wash, in small draw, drains N. 30° W.; asc. along rolling N. slope.
39.97	Point for the ¼ sec. cor. of secs. 4 and 9. Set an iron post, 30 ins. long, 2½ ins. diam., 5 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.
	T40S R2E ¼ $\frac{S4}{S9}$ 1974
79.94	The cor. of secs. 4, 5, 8 and 9. Land, rolling bench. Soil, sandy clay. Timber, dense pinon and juniper. Undergrowth, sagebrush, cacti and grasses.
	N. 0° 11' W., bet. secs. 4 and 5. Over broken bench land through dense timber.
31.00	Rim of box canyon, bears S. 60° E. and curves nearly N.; desc. abruptly along broken and ledgy NE. slope.
35.90	Point for the witness cor. of secs. 4 and 5, on narrow sandstone shelf, at base of ledge, 30 ft. high, bears N. and S. Set an iron post, 30 ins. long, 2½ ins. diam., over a cross (+) on solid sandstone, and in a mound of stone, 4 ft. base to top, with brass cap mkd.
	W C T40S R2E ¼ S5↑S4 1974
	Thence by triangulation, desc. abruptly over broken sandstone ledges facing NE.
40.00	Point for the ¼ sec. cor. of secs. 4 and 5, falls on inaccessible NE. slope of box canyon, and cannot be perpetuated.
40.50	Canyon, drains N. 55° W.; asc. abruptly over broken and precipitous SW. slope.
50.00	Narrow ledgy spur, projects W. End triangulation. Desc. broken and precipitous N. slope.
68.00	Canyon, drains irregularly S. 55° W.; asc. broken SE. slope.

Completion Survey of the Subdivision of
T. 40 S. R. 2 E., Salt Lake Meridian. U.S.

CHAINS

79.82

The cor. of secs. 4, 5, 32 and 33, on the N. bdy. of the Tp., monumented with an iron post, $2\frac{1}{2}$ ins. diam., extending 3 ins. above mound of stone, 3 ft. base, 15 ins. high, with brass cap mkd.

T39S R2E

$$\frac{S32|S33}{S5|S4}$$

T40S
1956

from which the bearing trees mkd. in 1956.

A juniper, 6 ins. diam., bears N. 37° E., 83 lks. dist. mkd. T39SR2ES33BT.

A pinon, 12 ins. diam., bears S. $60^\circ 30'$ E., 100 lks. dist., mkd. T40SR2ES4BT.

A juniper, 20 ins. diam., bears N. 87° W., 52 lks. dist., mkd. T39SR2ES32BT.

Land, broken bench.

Soil, sandy clay.

Timber, dense pinon and juniper.

Undergrowth, sagebrush and blackbrush.

The true point for the cor. of secs. 29, 30, 31 and 32 was determined by extending the line from the $\frac{1}{4}$ sec. cor. of secs. 31 and 32 over the witness cor. and at record dist. from the witness cor. which bears S. $0^\circ 03'$ E., 1.28 chs. dist., monumented with an iron post, $2\frac{1}{2}$ ins. diam., firmly set in a mound of stone, 3 ft. base, 2 ft. high, with brass cap mkd.

T40S R2E

$$\frac{S30|S29}{S31|S32}$$

W C
1956

N. $89^\circ 59'$ W., bet. secs. 30 and 31.

Over broken and ledgy bench land through dense timber. By triangulation, desc. over broken and ledgy W. slope.

33.50

Smith Run Canyon, drains S. 25° E.; asc. NE. slope.

40.00

Point for the $\frac{1}{4}$ sec. cor. of secs. 30 and 31. End triangulation.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 8 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T40S R2E

$$\frac{1}{4} \frac{S30}{S31}$$

1974

Asc. broken NE. slope.

Completion Survey of the Subdivision of
T. 40 S., R. 2 E., Salt Lake Meridian, Utah

CHAINS	
71.00	Rim of Smith Run Canyon; top of ledge, 50 ft. high, bears N. and S.; asc. over gentle E. slope.
74.35	Top of ascent, bears N. and S.; desc. over gentle W. slope.
79.95	The cor of secs. 25, 30, 31 and 36, on the W. bdy. of the Tp., at head of small draw, drains N., monumented with an iron post, 2½ ins. diam., firmly set in a mound of stone, 4 ft. base, 3 ft. high, with brass cap mkd.
	T40S R1E R2E $\begin{array}{r} \text{S25 S30} \\ \hline \text{S36 S31} \end{array}$ 1956
	from which the bearing trees mkd. in 1956.
	A scrub pinon, 5 ins. diam., bears S. 54° W., 78 lks. dist., mkd. BT only.
	A scrub pinon, 6 ins. diam., bears N. 26° 15' W., 31 lks. dist., mkd. BT only.
	Land, broken bench. Soil, sandy clay. Timber, medium dense pinon and juniper. Undergrowth, sagebrush, cacti and grasses.
	From the true point for the cor. of secs. 29, 30, 31 and 32.
	N. 0° 03' W., bet. secs. 29 and 30.
	Over broken and ledgy bench land, through medium dense timber. Asc. along broken W. slope.
25.00	Top of ledge, 40 ft. high, bears N. 40° W. and S. 40° E.; thence over rolling bench land.
40.00	Point for the ¼ sec. cor. of secs. 29 and 30.
	Set an iron post, 30 ins. long, 2½ ins. diam., over a cross (+) on solid sandstone, and in a mound of stone, 4 ft. base to top, with brass cap mkd.
	T40S R2E $\begin{array}{r} \frac{1}{4} \\ \text{S30 S29} \end{array}$ 1974
72.00	Spur, slopes W.; desc. N. slope.
76.50	Draw, drains S. 80° W.; asc. S. slope.
80.00	Point for the cor. of secs. 19, 20, 29 and 30.
	Set an iron post, 30 ins. long, 2½ ins. diam., 4 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

Completion Survey of the Subdivision of
T. 40 S., R. 2 E., Salt Lake Meridian, Utah

CHAINS	<p>T40S R2E</p> <p>$\frac{S19 S20}{S30 S29}$</p> <p>1974</p> <p>Land, broken bench S. portion; rolling N. portion. Soil, sandy clay. Timber, medium dense pinon and juniper. Undergrowth, sagebrush and cacti.</p>
<p>13.00</p> <p>17.50</p> <p>24.50</p> <p>36.00</p> <p>39.90</p>	<p>From the cor. of secs. 20, 21, 28 and 29.</p> <p>S. 89° 55' W., bet. secs. 20 and 29.</p> <p>Over broken bench land, through dense timber. Desc. over broken SW. slope.</p> <p>Draw, drains S. 45° W.; asc. SE. slope.</p> <p>Point of spur, slopes S.; desc. SW. slope.</p> <p>Canyon, drains S.; asc. broken NE. slope.</p> <p>Rim of canyon, bears N. 35° W. and S. 35° E.; thence over gently rolling bench land.</p> <p>Point for the $\frac{1}{4}$ sec. cor. of secs. 20 and 29.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.</p>
<p>60.00</p> <p>79.80</p> <p>18.00</p> <p>32.50</p> <p>40.00</p> <p>41.10</p>	<p>T40S R2E</p> <p>$\frac{\frac{1}{4} S20}{S29}$</p> <p>1974</p> <p>Jeep trail, bears N. 5° E. and S. 5° W.</p> <p>The cor. of secs. 19, 20, 29 and 30.</p> <p>Land, broken E. portion; rolling bench W. portion. Soil, sandy clay. Timber, dense pinon and juniper. Undergrowth, sagebrush and cacti.</p> <p>N. 89° 58' W., bet. secs. 19 and 30.</p> <p>Over rolling bench land, through dense timber.</p> <p>Spur, slopes S. 75° W.; desc. broken W. slope.</p> <p>Smith Run Canyon, drains S.; asc. broken E. slope.</p> <p>Point for the $\frac{1}{4}$ sec. cor. of secs. 19 and 30, falls on precipitous and ledgy E. slope and cannot be perpetuated.</p> <p>Point for the witness $\frac{1}{4}$ sec. cor. of secs. 19 and 30, on ledge, bears N. and S., on E. slope.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., over a cross (+) cut in solid sandstone, and in a mound of stone, 4 ft. base to top, with brass cap mkd.</p>

Completion Survey of the Subdivision of
T. 40 S., R. 2 E., Salt Lake Meridian, Utah

CHAINS

W C
T40S R2E

$\frac{1}{4} \frac{S19}{S30} \rightarrow$

1974

Asc. broken E. slope.

- 45.10 Narrow spur, projects S.; by triangulation, desc. broken and ledgy SW. slope.
- 53.00 Ledgy draw, drains S. 50° W.; asc. ledgy SE. slope.
- 59.50 Point of ledgy spur, projects S. 45° W.; desc. broken and ledgy SW. slope.
- 67.00 Head of ledgy draw, drains S.; asc. broken SE. slope.
- 73.00 Point of ledgy spur, projects S.; desc. ledgy W. slope.
- 75.50 Fork of Smith Run Canyon, drains S. 20° E. from N.; asc. along broken S. slope of small spur.
- 79.87 The cor. of secs. 19, 24, 25 and 30, on the W. bdy. of the Tp., monumented with an iron post, 2½ ins. diam., firmly set in a mound of stone, 3 ft. base, 1½ ft. high, with brass cap mkd.

T40S
R1E R2E

$\frac{S24 | S19}{S25 | S30}$

1956

Land, broken and rolling bench land.
Soil, sandy clay, exposed sandstone.
Timber, dense pinon and juniper.
Undergrowth, sagebrush, cacti and serviceberry.

From the cor. of secs. 19, 20, 29 and 30.

N. 0° 03' W., bet. secs. 19 and 20.

Over rolling bench land, through dense timber.

- 7.00 Spur, projects W.; thence along W. slope.
- 12.00 Draw, drains W.
- 16.00 Small spur, slopes W.
- 20.00 Small draw, near head, drains W.
- 26.00 Spur, slopes W., desc. along general W. slope.
- 33.00 Draw, drains W.
- 36.00 Spur, slopes W.; desc. ledgy N. slope.
- 40.00 Point for the ¼ sec. cor. of secs. 19 and 20.
Set an iron post, 30 ins. long, 2½ ins. diam., over a cross (+) cut in solid sandstone, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

Completion Survey of the Subdivision of
T. 40 S., R. 2 E., Salt Lake Meridian, Utah

CHAINS

T40S R2E

$$\frac{1}{4}$$
 S19|S20

1974

Cor. located in head of small draw, drains W.

45.00 Spur, slopes N. 80° W.; desc. broken and ledgy NW. slope.

50.00 Smith Run Canyon, drains S. 60° W. from N. 20° E.; asc. broken and ledgy general NW. slope.

80.00 Point for the cor. of secs. 17, 18, 19 and 20, on spur, slopes S. 10° E.

Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T40S R2E

$$\frac{S18|S17}{S19|S20}$$

1974

Land, rolling S. portion; broken N. portion.

Soil, sandy clay.

Timber, dense pinon and juniper.

Undergrowth, sagebrush, cacti and grasses.

From the cor. of secs. 16, 17, 20 and 21.

S. 89° 58' W., bet. secs. 17 and 20.

Over gently rolling bench land, through dense timber.

14.75 Trail road, bears N. 25° W. and S. 25° E.

32.00 Jeep trail, bears N. 20° W. and curves S.

40.00 Point for the ¼ sec. cor. of secs. 17 and 20.

Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T40S R2E

$$\frac{1}{4} \frac{S17}{S20}$$

1974

from which

A pinon, 6 ins. diam., bears S. 12° E., 24 lks. dist., mkd. ¼S20BT.

Cor. located in small drain, draining S.

Desc. general W. slope.

59.00 Smith Run Canyon, drains S. 20° W. from N.; asc. general broken SE. slope.

Completion Survey of the Subdivision of
T. 40 S., R. 2 E. Salt Lake Meridian Utah

CHAINS
80.00

The cor. of secs. 17, 18, 19 and 20.

Land, rolling E. portion; broken W. portion.
Soil, sandy clay.
Timber, dense pinon and juniper.
Undergrowth, sagebrush and cacti.

N. 89° 58' W., bet. secs. 18 and 19.

Over rolling bench land, through dense timber.

26.00

Wash, drains S. 40° W.

40.00

Point for the $\frac{1}{4}$ sec. cor. of secs. 18 and 19.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 4 ins. in
the ground to bedrock, and in a mound of stone, 4 ft.
base to top, with brass cap mkd.

T40S R2E

$\frac{1}{4}$ $\frac{S18}{S19}$

1974

from which

A pinon, 6 ins. diam., bears S. 18° 30' W., 111 lks.
dist., mkd. $\frac{1}{4}$ S19BT.

A pinon, 16 ins. diam., bears N. 4° 30' W., 41 lks.
dist., mkd. $\frac{1}{4}$ S18BT.

63.00

Trail road, bears N. 42° E. and S. 30° W.

74.00

Jeep trail, bears N. 60° E. and S. 60° W.

79.80

The cor. of secs. 13, 18, 19 and 24, on the W. bdy. of
the Tp., monumented with an iron post, $2\frac{1}{2}$ ins. diam.,
extending 12 ins. above ground, with brass cap mkd.

T40S
R1E R2E

$\frac{S13|S18}{S24|S19}$

1956

from which the bearing trees mkd. in 1956.

A juniper, 12 ins. diam., bears N. 69° 45' E., 62
lks. dist., mkd. T40SR2ES18BT.

A juniper, 6 ins. diam., bears N. 19° 45' W., 91
lks. dist., mkd. T40SR1ES13BT.

Land, rolling bench.
Soil, sandy clay.
Timber, dense pinon and juniper.
Undergrowth, sagebrush and cacti.

From the cor. of secs. 17, 18, 19 and 20.

N. 0° 03' W., bet. secs. 17 and 18.

Over rolling bench land through dense timber.

Completion Survey of the Subdivision of
T. 40 S., R. 2 E., Salt Lake Meridian, Utah

CHAINS

17.95 Enter cleared area, edge bears W. about 5.00 chs. and E. about 50 lks., thence N.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 17 and 18.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

T40S R2E

$\frac{1}{4}$
S18|S17

1974

Cor. located at E. edge of cleared area.

62.50 Trail road, bears N. 80° E. and S. 80° W.; enter dense timber, edge bears S. 80° W., and S.

74.90 Jeep trail, bears N. 88° E. and S. 88° W.

80.00 Point for the cor. of secs. 7, 8, 17 and 18.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T40S R2E

$\frac{S7|S8}{S18|S17}$

1974

from which

A juniper, 14 ins. diam., bears N. 87° E., 25 lks. dist., mkd. T40SR2ES8BT.

Land, rolling bench.

Soil, sandy clay.

Timber, dense pinon and juniper.

Undergrowth, sagebrush, cacti and grasses.

From the cor. of secs. 8, 9, 16 and 17.

S. $89^\circ 59'$ W., bet. secs. 8 and 17.

Over gently rolling bench land, through dense timber.

30.50 Jeep trail, bears N. 20° W. and S. 20° E.

40.01 Point for the $\frac{1}{4}$ sec. cor. of secs. 8 and 17.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.

T40S R2E

$\frac{S8}{S17}$

1974

from which

Completion Survey of the Subdivision of
T. 40 S., R. 2 E., Salt Lake Meridian Utah

CHAINS	
	<p>A juniper, 18 ins. diam., bears S. 20° W., 25 lks. dist., mkd. $\frac{1}{4}$S17BT.</p> <p>A juniper, 20 ins. diam., bears N. 29° 30' W., 97 lks. dist., mkd. $\frac{1}{4}$S8BT.</p>
60.00	Jeep trail, bears N. 20° W. and S. 20° E.
80.02	<p>The cor. of secs. 7, 8, 17 and 18.</p> <p>Land, gently rolling bench. Soil, sandy clay. Timber, dense pinon and juniper. Undergrowth, sagebrush and cacti.</p>
	<p>S. 89° 59' W., bet. secs. 7 and 18.</p> <p>Over rolling bench land, through dense timber.</p>
10.00	Draw, drains N. 35° W.
40.00	<p>Point for the $\frac{1}{4}$ sec. cor. of secs. 7 and 18.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 15 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.</p> <p style="text-align: center;">T40S R2E</p> <p style="text-align: center;">$\frac{1}{4}$ $\frac{S7}{S18}$</p> <p style="text-align: center;">1974</p>
79.76	<p>The cor. of secs. 7, 12, 13 and 18, on the W. bdy. of the Tp., monumented with an iron post, 2½ ins. diam., firmly set in a mound of stone, 3 ft. base, 1½ ft. high, with brass cap mkd.</p> <p style="text-align: center;">T40S R1E R2E</p> <p style="text-align: center;">$\frac{S12 S7}{S13 S18}$</p> <p style="text-align: center;">1956</p> <p>Land, rolling bench. Soil, sandy clay. Timber, dense pinon and juniper. Undergrowth, sagebrush and cacti.</p>
	<p>From the cor. of secs. 7, 8, 17 and 18.</p> <p>N. 0° 03' W., bet. secs. 7 and 8.</p> <p>Over rolling bench land, through dense timber.</p>
22.00	Draw, drains N. 50° W. curving SW.
40.00	<p>Point for the $\frac{1}{4}$ sec. cor. of secs. 7 and 8.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.</p>

Completion Survey of the Subdivision of
T. 40 S., R. 2 E., Salt Lake Meridian, Utah

CHAINS

T40S R2E

$$\frac{1}{4}$$
 S7|S8

1974

from which

A juniper, 12 ins. diam., bears S. 8° E., 31½ lks.
dist., mkd. ¼S8BT.

53.75 Jeep trail, bears N. 20° W. and S. 20° E.

80.00 Point for the cor. of secs. 5, 6, 7 and 8.

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in
the ground to bedrock, and in a mound of stone, 3½ ft.
base to top, with brass cap mkd.

T40S R2E

$$\frac{S6|S5}{S7|S8}$$

1974

from which

A pinon, 14 ins. diam., bears N. 60° E., 25 lks.
dist., mkd. S5BT.

Land, rolling bench.
Soil, sandy clay.
Timber, dense pinon and juniper.
Undergrowth, sagebrush and cacti.

From the cor. of secs. 4, 5, 8 and 9.

S. 89° 59' W., bet. secs. 5 and 8.

Over rolling bench land, through dense timber.

40.00 Point for the ¼ sec. cor. of secs. 5 and 8.

Set an iron post, 30 ins. long, 2½ ins. diam., 22 ins. in
the ground, with brass cap mkd.

T40S R2E

$$\frac{1}{4} \frac{S5}{S8}$$

1974

from which

A juniper, 18 ins. diam., bears S. 25° 30' E., 122
lks. dist., mkd. ¼S8BT.

A juniper, 12 ins. diam., bears N. 12° W., 89 lks.
dist., mkd. ¼S5BT.

56.50 Jeep trail, bears N. 3° E. and S. 3° W.

72.00 Draw, drains N. 25° W.

80.00 The cor. of secs. 5, 6, 7 and 8.

Completion Survey of the Subdivision of
T. 40S R. 2E Sec. 1, 6, 7 and 12, H. 1

CHAINS

Land, rolling bench.
Soil, sandy clay.
Timber, dense pinon and juniper.
Undergrowth, sagebrush and cacti.

S. 89° 49' W., bet. secs. 6 and 7.

Over rolling bench land, through dense timber.

8.90 Jeep trail, bears N. 19° 45' W. and S. 19° 45' E.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 6 and 7.

Set an iron post, 30 ins. long, 2½ ins. diam., over a cross (+) cut in solid sandstone, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T40S R2E

$\frac{1}{4} \frac{S6}{S7}$

1974

Desc. over broken SW. slope.

46.00 Ledyg canyon, drains N. 50° W.; asc. broken NE. slope.

65.00 Narrow ledgy spur, projects N. 45° W.; desc. SW. slope.

72.50 Rocky draw, drains N. 50° W.; asc. NE. slope.

76.45 Point of ledgy spur, projects N. 50° W.; desc. abruptly over broken and ledgy NW. slope.

79.72 The cor. of secs. 1, 6, 7 and 12, on the W. bdy. of the Tp., monumented with a brass tablet, set 3½ ins. diam., flush in solid sandstone, mkd.

T40S
R1E R2E

$\frac{S1|S6}{S12|S7}$

1956

from which the bearing trees mkd. in 1956.

A pinon, 14 ins. diam., bears S. 81° 30' E., 49 lks. dist., mkd. T40SR2ES7BT.

A pinon, 6 ins. diam., bears S. 80° 15' W., 50 lks. dist., mkd. T40SR1ES12BT.

Land, rolling bench E. portion; broken W. portion.
Soil, sandy clay.
Timber, dense pinon and juniper.
Undergrowth, sagebrush and cacti.

From the cor. of secs. 5, 6, 7 and 8.

N. 0° 08' W., bet. secs. 5 and 6.

Over broken land through, dense timber. By triangulation desc. along broken E. slope of canyon.

3

Completion Survey of the Subdivision of
T. 40 S., R. 2 E., Salt Lake Meridian, Utah

CHAINS

- 11.50 Canyon, drains irregularly N.
- 18.50 Same canyon, drains N. 10° E.
- 24.50 Same canyon, drains N. 5° W., curving N.; thence desc. along W. slope.
- 40.00 Point for the ¼ sec. cor. of secs. 5 and 6.
Set an iron post, 30 ins. long, 2½ ins. diam., over a cross (+) on solid sandstone, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T40S R2E

¼
S6|S5

1974

Desc. abruptly over sandstone ledges in canyon, drains N.

- 42.00 Canyon, drains N. 10° E. curving N.; desc. along ledgy E. slope.
- 56.00 Canyon, 2.00 chs. W. of junction, drains N. 45° W. from E.; asc. broken and ledgy S. slope.
- 68.40 Narrow, ledgy spur, projects W.; desc. ledgy N. slope.
- 78.75 Four Mile Canyon, wash, 50 lks. wide, 10 ft. deep, drains irregularly W.; asc. S. slope.
- 79.81 The cor. of secs. 5, 6, 31 and 32, on the N. bdy. of the Tp., monumented with an iron post, 2½ ins. diam., extending 12 ins. above ground, and in a collar of stone, with brass cap mkd.

T39S R2E

S31|S32
S6|S5

T40S
1956

Land, broken bench.
Soil, sandy clay.
Timber, dense pinon and juniper.
Undergrowth, sagebrush, greasewood and cacti.

General Description

Township 40 South, Range 2 East is mostly rolling and broken bench land covered with a medium to dense growth of pinon and juniper, with sagebrush, black brush, cacti and native grasses. The area is drained in a southerly direction by three major canyons: Wesses Canyon in east portion, John Henry Canyon in the central portion and Smith Run Canyon in the west portion. The canyons have a depth of about 800 to 900 ft. The elevation of the major portion of the bench area is about 6,100 ft. above sea level. The soil in the area is a shallow sandy loam. Access to the township is by several dirt roads and jeep trails located on the bench area. No water was noted in the township in this survey. Several test drill sites

Completion Survey of the Subdivision of
T. 40 S., R. 2 E., Salt Lake Meridian Utah

CHAINS

for coal exploration were noted throughout the bench area.
The magnetic declination was found to be 14° 45' East.

R0594

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT


FIELD ASSISTANTS

NAMES	CAPACITY
Craig P. Sylvester	Supervisory Cadastral Surveyor
Milton Ross Workman	Supervisory Cadastral Surveyor
Ferrel D. Reynolds	Surveying Technician
Gail E. Reynolds	Surveying Technician
Alan G. Plowgian	Surveying Aid
Eric Stahlke	Surveying Aid
Ronald C. Collings	Surveying Aid
Tim Bailey	Surveying Aid

36
CERTIFICATE OF SURVEY

I, ~~do~~ Glen B. Hatch, HEREBY
CERTIFY upon honor that, in pursuance of special instructions bearing date of the 19th day
of April, 1974, (I) ~~(we)~~ have surveyed the completion of the
subdivision of Township 40 South, Range 2 East

of the Salt Lake Meridian, in the State of Utah, which
are represented in the foregoing field notes as having been executed by (me), ~~(we)~~ and under (my)
~~xxxx~~ direction, and that said survey has been made in strict conformity with said special instruc-
tions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in
specific manner described in the foregoing field notes.

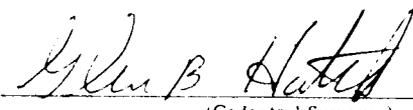January 15, 1975
(Date)

(Cadastral Surveyor)
Supervisory
Date _____
(Cadastral Surveyor)


CERTIFICATE OF APPROVAL

SUBMITTED FOR APPROVAL
Date MAR 11 1975

BUREAU OF LAND MANAGEMENT
Washington, D.C.

The foregoing field notes of the survey of the completion of the subdivision of
Township 40 South, Range 2 East, Salt Lake Meridian, Utah

executed by Glen B. Hatch, Supervisory Cadastral Surveyor
has been critically examined and found correct, and hereby approved

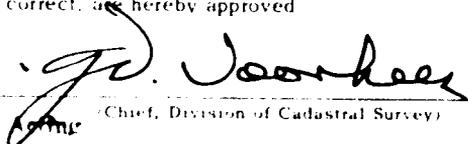AUG 11 1975
Date

(Chief, Division of Cadastral Survey)

CERTIFICATE OF TRANSCRIPT

is a true copy of the original field notes.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

ORIGINAL
FIELD NOTES

OF THE DEPENDENT RESURVEY OF

A PORTION OF THE WEST BOUNDARY

AND THE SURVEY OF A PORTION OF

THE SUBDIVISIONAL LINES OF

TOWNSHIP 41 SOUTH, RANGE 2 EAST

Of the SALT LAKE Meridian,

In the State of UTAH.

EXECUTED BY

JERRY L. THOMAS

SUPERVISORY CADASTRAL SURVEYOR

Under special instructions dated APRIL 19, 19 74, which provided for the surveys
included under Group Number 554, approved APRIL 22, 1974,
and assignment instructions dated JUNE 26, 19 74.

Survey commenced JULY 10, 19 74

Survey completed AUGUST 9, 19 74

INDEX DIAGRAM

Township 41 SOUTH , Range 2 EAST

35	35	21	36		36
34 6	34 8	20 4	8	2	1
32	32	20	16		7
33 7	31 8	19 9	10	15 11	7 12
30	29		15	14	6
31 14	28 17	16	15	14 14	5 13
27	26		13	13	4
28 19	26 20	18 21	22	12 28	4 24
24	24	18	11	11	3
25 30	23 29	17 24	27	10 26	2 25
21		17	9	9	
22					
1 11	12	33	34	8 35	36

Dependent Resurvey of a portion of the W. bdy. of
T. 41 S., R. 2 E., Salt Lake Meridian, Utah

CHAINS

The boundaries and a portion of the subdivision of the township have been established by earlier surveys as follows:

The north boundary (Eighth Standard Parallel South) was surveyed by Kenneth D. Witt in 1956. The south and west boundaries were surveyed by Thomas C. Rathbone and Lyman E. Bolinger in 1917. The east boundary and a portion of the subdivisional lines were surveyed by Boyd S. Owens in 1958.

The following field notes are those of the dependent resurvey of a portion of the W. bdy. and the survey of a portion of the subdivisional lines of Township 41 South, Range 2 East, Salt Lake Meridian, Utah.

The survey was executed in accordance with specifications set forth in the Manual of Surveying Instructions, 1973, and the Special Instructions for Group No. 554, Utah, dated April 19, 1974.

The directions of lines were determined by reference to true meridians established on line by hour angle observations on Polaris and altitude observations on the sun. The lines were carried forward by sustained angulation being supplemented by other numerous hour angle observations on Polaris and altitude observations on the sun.

Distances were obtained using an 8 chain steel tape and a Hewlett-Packard 3800-A Distance Meter electronic measuring device.

The geographic position of the southeast corner of the township as adjusted from traverses to U.S.G.S. triangulation stations within the area by Boyd S. Owens in 1958 is as follows:

Latitude $37^{\circ}11'40.2''$ N. Longitude $111^{\circ}37'58.3''$ W.

The mean magnetic declination is $14^{\circ} 30'$ E.

Dependent Resurvey of a portion of the W. bdy. of T. 41 S., R. 2 E., Salt Lake Meridian, Utah. (Correcting the 1917 survey executed by Thomas C. Rathbone and Lyman E. Bolinger.)

Beginning at the $\frac{1}{4}$ sec. cor. of secs. 31 and 36, on the W. bdy. of the Tp., monumented with an iron post, 36 ins. long, 1 in. diam., 6 ins. in the ground to bedrock, 18 ins. in a mound of stone, $3\frac{1}{2}$ ft. base. This cor. will now function for the $\frac{1}{4}$ sec. cor. of sec. 36, T. 41 S., R. 1 E., only and was remarked to read

T41S
R1E R2E

$\frac{1}{4}$
S36|
1974
1917

from which

A pinon, 6 ins. diam., bears S. 34° E., 26 lks.
dist., mkd. $\frac{1}{4}$ S31 BT.

A pinon, 12 ins. diam., bears N. $52\frac{1}{2}^{\circ}$ W., 158 lks.
dist., mkd. $\frac{1}{4}$ S36BT.

Dependent Resurvey of a portion of the W. bdy. of
T. 41 S., R. 2 E., Salt Lake Meridian Utah

CHAINS

South, bet. secs. 31 and 36.

Over broken land.

25.81 The witness cor. to the cor. of Tps. 41 and 42 S., Rs. 1 and 2 E., monumented with an iron post, 3 ft. long, 3 ins. diam., 30 ins. in a mound of stone, with brass cap mkd.

T41S
R1E R2E

$\frac{S36}{S1} | \frac{S31}{S6}$

T42S
WC
1917

from which

A pinon, 8 ins. diam., bears N. 61° 15' E., 133 lks. dist., mkd. WCT41SR2ES31BT.

Continue South, desc. steep sandstone ledges.

40.12 True point for the cor. of Tps. 41 and 42 S., Rs. 1 and 2 E. at proportionate dist., falls on steep talus slope and deemed unsafe to perpetuate.

From this point, the $\frac{1}{4}$ sec. cor. of secs. 6 and 31, Tps. 41 and 42 S., R. 2 E., bears S. 89° 49' E., 39.48 chs. dist., monumented with an iron post, 1 in. diam. extending 30 ins. above ground, and in a mound of stone, 3½ ft. base, with brass cap mkd.

$\frac{1}{4} \frac{S31}{S6}$

1917

From the same point, the $\frac{1}{4}$ sec. cor. of secs. 1 and 36, Tps. 41 and 42 S., R. 1 E., bears S. 89° 49' W., 40.00 chs. dist., monumented with an iron post, 1 in. diam., extending 10 ins. above ground, and in collar of stone, with brass cap mkd.

$\frac{1}{4} \frac{S36}{S1}$

1917

From the same point, the $\frac{1}{4}$ sec. cor. of secs. 1 and 6, T. 42 S., Rs. 1 and 2 E., bears S. 43.88 chs. dist., monumented with an iron post, 1 in. diam., extending 10 ins. above ground, with mound of stone to west, brass cap mkd.

$\frac{1}{4} \frac{S1}{S6}$

1917

Subdivision of T. 41 S., R. 2 E., Salt Lake Meridian, Utah

From the cor. of secs. 25, 26, 35, and 36, monumented with an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, in a mound of stone, 3½ ft. base to top, with brass cap mkd.

Subdivision of T. 41 S., R. 2 E., Salt Lake Meridian, Utah

CHAINS

T41S R2E

S26|S25
S35|S36

1958

N. 0° 01' W., bet. secs. 25 and 26.

Descend over rocky NE. slope.

39.33 Top of spur, slopes E.; desc. over N. slope to cor.

40.00 Point for the ¼ sec. cor. of secs. 25 and 26.

Set an iron post, 30 ins. long, 2½ ins. diam., 15 ins. in the ground, in a mound of stone, 3½ ft. base to top, with brass cap mkd.

T41S R2E

¼
S26|S25

1974

42.50 Wash, drains N. 70° E.; asc. 240 ft. over S. slope.

56.00 Top of spur, slopes E.; desc. 160 ft. over NE. slope.

62.00 Bottom of descent; thence along broken E. slope.

80.00 Point for the cor. of secs. 23, 24, 25, and 26.

Set an iron post, 30 ins. long, 2½ ins. diam., 5 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T41S R2E

S23|S24
S26|S25

1974

Land, rough and broken mountainous.

Soil, rocky.

Timber, none; undergrowth, grass Brigham tea, and shadscale.

From the cor. of secs. 19, 24, 25, and 30, on the E. bdy. of the Tp., monumented with an iron post, 30 ins. long, 2½ ins. diam., 15 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T41S
R2E R3E

S24|S19
S25|S30

1958

West, bet. secs. 24 and 25.

Over broken desert land.

39.89 Point for the ¼ sec. cor. of secs. 24 and 25.

Subdivision of T. 41 S., R. 2 E., Salt Lake Meridian, Utah

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 4 ins. in the ground, in a mound of stone, 3 ft. base to top, with brass cap mkd.

T41S R2E

¼ $\frac{S24}{S25}$

1974

The cor. is located on E. slope of spur under an overhanging sandstone shelf.

70.00 Top of spur, slopes S.

79.78 The cor. of secs. 23, 24, 25, and 26.

Land, broken desert.

Soil, sandy, rocky.

No timber; undergrowth, scattered grass, Brigham tea.

N. 0° 01' W., bet. secs. 23 and 24.

Asc. over broken SE. slope.

20.00 Top of narrow bench, bears E. and W.; desc. over N. slope.

25.00 Bottom of wash, drains E., asc. over SE. slope.

40.00 Point for the ¼ sec. cor. of secs. 23 and 24.

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground, in a mound of stone, 4½ ft. base to top, with brass cap mkd.

T41S R2E

¼
S23|S24

1974

44.00 Top of spur, slopes E.; desc. over N. slope.

63.50 Wash, drains S. 80° E.; asc. S. slope.

70.00 Top of spur, slopes S. 80° E.; desc. broken NE. slope.

80.00 True point for the cor. of secs. 13, 14, 23, and 24, falls in bottom of a wash, drains SE., and is unsafe to monument; from which the witness cor. bears N. 0° 01' W., 0.32 chs. dist., hereinafter described.

Land, broken.

Soil, rocky.

No timber; undergrowth, scattered Brigham tea, grass and weeds.

The true point for the cor. of secs. 13, 18, 19 and 24 on the E. bdy. of the tp. was found to be on line bet. the ¼ sec. cor. of secs. 13 and 18, and the ¼ sec. cor. of secs. 19 and 24 and at record dist. from the witness cor. which bears North 3.00 chs., monumented by an iron post, 30 ins. long, 2½ ins. diam., 14 ins. in the ground, in a mound of stone, 3½ ft. base to top, with brass cap mkd.

Subdivision of T. 41 S., R. 2 E., Salt Lake Meridian, Utah

CHAINS

T41S
R2E R3E

$\frac{S13|S18}{S24\downarrow S19}$

WC
1958

N. 89° 52' W., bet. secs. 13 and 24.

Asc. over rough, broken SE. slope.

21.00 Top of spur, slopes SE.; desc. SW. slope.

39.90 Point for the $\frac{1}{4}$ sec. cor. of secs. 13 and 24.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 8 ins. in the ground in a mound of stone, $4\frac{1}{2}$ ft. base to top, with brass cap mkd.

T41S R2E

$\frac{S13}{\frac{1}{4} S24}$

1974

Thence along a broken S. slope.

79.80 True point for the cor. of secs. 13, 14, 23, and 24.

Land, broken.
Soil, rocky.
No timber or undergrowth.

N. 0° 01' W., bet. secs. 13 and 14.

Asc. over broken, ledgy S. slope.

0.32 Point chosen for the witness cor. of secs. 13, 14, 23 and 24.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 12 ins. in the ground, in a mound of stone, 3 ft. base to top, with brass cap mkd.

WC
T41S R2E

$\frac{S14|S13}{S23\downarrow S24}$

1974

Continue asc. over steep SW. slope.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 13 and 14.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 8 ins. in the ground, in a mound of stone, $4\frac{1}{2}$ ft. base to top, with brass cap mkd.

T41S R2E

$\frac{1}{4}$
S14|S13

1974

Subdivision of T. 41 S., R. 2 E., Salt Lake Mer 11 1 1

CHAINS

42.70 S. edge of mesa, bears W. and SE.; thence over mesa top.

59.00 N. edge of mesa, bears W. and SE.; desc. steep N. slope into John Henry Canyon.

80.00 Point for the cor. of secs. 11, 12, 13, and 14.

Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground, in a mound of stone, 4½ ft. base to top, with brass cap mkd.

T41S R2E

$\frac{S11|S12}{S14|S13}$

1974

Land, rough and broken.

Soil, rocky.

Timber, scattered juniper, pinon; undergrowth, Brigham tea, grass.

From the cor. of secs. 7, 12, 13, and 18, on the E. bdy. of the Tp., monumented by an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground, in a mound of stone, 3½ ft. base to top, with brass cap mkd.

T41S
R2E R3E

$\frac{S12|S7}{S13|S18}$

1958

N. 89° 58' W., bet. secs. 12 and 13.

Over rolling land.

39.87 Point for the ¼ sec. cor. of secs. 12 and 13.

Set an iron post, 30 ins. long, 2½ ins. diam., 16 ins. in the ground, in a collar of stone to top, with brass cap mkd.

T41S R2E

$\frac{1}{4} \frac{S12}{S13}$

1974

The cor. is located on W. slope, 20 ft. above wash 6 ins. deep and 20 lks. wide, which drains S.

43.50 Wash, drains S.

66.50 Wash in bottom of John Henry Canyon, drains irregularly S. 80° E.; asc. NE. slope.

79.74 The cor. of secs. 11, 12, 13, and 14.

Land, rolling.

Soil, rocky.

No timber; undergrowth, scattered grass, shadscale, Brigham tea, and weeds.

Subdivision of T. 41 S., R. 2 E. Salt Lake Meridian Utah

CHAINS

0. 0° 05' W., bet. secs. 11 and 12.

Desc. over NE. slope.

6.00 Wash in bottom of John Henry Canyon, drains irregularly S. 10° E.

16.00 Asc. 720 ft. over SW. slope.

36.50 N. rim of John Henry Canyon, bears NW. and SE.

40.05 Point for the ¼ sec. cor. of secs. 11 and 12.

Set an iron post, 30 ins. long, 2½ ins. diam., 4 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T41S R2E

¼
S11|S12

1974

59.00 Desc. 180 ft. over a N. slope.

72.00 Wash, drains SW.; asc. SE. slope.

80.10 The cor. of secs. 1, 2, 11, and 12, monumented with an iron post, 30 ins. long, 2½ ins. diam., in a mound of stone, 4 ft. base to top, with brass cap mkd.

T41S R2E

S2|S1
S11|S12

1958

Land, broken.
Soil, sand, rocky.
Timber, juniper, pinon.

From the cor. of secs. 1, 6, 7, and 12, on the E. bdy. of the Tp., monumented with an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground, in a mound of stone, 3½ ft. base to top, with brass cap mkd.

T41S
R2E R3E

S1|S6
S12|S7

1958

N. 89° 54' W., bet. secs. 1 and 12.

Over rough and broken land.

28.00 Edge of ridge, bears N. and S.

33.00 Leave ridge; desc. over rocky SW. slope.

38.39 Point chosen for the witness ¼ sec. cor. of secs. 1 and 12.

Subdivision of T. 41 S., R. 2 E., Salt Lake Meridian, Utah

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 2 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.

WC
T41S R2E

← S1
S12

1974

- 39.91 True point for the ¼ sec. cor. of secs. 1 and 12, falls on inaccessible ledgy SW. slope of canyon and cannot be monumented.
- 57.00 Ridge, bears N. 20° E., and S. 20° W.; desc. over a W. slope.
- 71.00 Wash, drains SW.; asc. SE. slope.
- 79.82 The cor. of secs. 1, 2, 11, and 12.

Land, rough, broken.
Soil, sandy, rocky.
Timber, juniper, pinon; undergrowth, round leaf buffalo berry, fenderlure brush.

From the cor. of secs. 2, 3, 34, and 35, on the S. bdy of the Tp., monumented by an iron post, 36 ins. long, 2 ins. diam., on bare sandstone bedrock, 24 ins. in a mound of stone, 5 ft. base, with brass cap mkd.

T41S R2E

S34 | S35
S3 | S2

T42S
1917

from which

A lone cedar, 6 ins. diam., bears N. 10° E., 132 lks. dist., mkd. T41SR2ES35BT.

N. 0° 01' W., bet. secs. 34 and 35.

Over rolling and broken desert land.

- 19.00 Bottom of draw, drains S. 80° E.; asc. over SW. slope.
- 31.04 Top of spur, slopes SE.; desc. over NE. slope.
- 40.00 True point for the ¼ sec. cor. of secs. 34 and 35, falls on large boulder and cannot be monumented.
- 40.09 Point chosen for witness ¼ sec. cor. of secs. 34 and 35.

Set an iron post, 30 ins. long, 2½ ins. diam., 14 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.

WC
T41S R2E

½
S34 ↓ S35

1974

Subdivision of T. 41 S., R. 2 E., Salt Lake Meridian, Utah

CHAINS

The cor. is located below a ledge near the point of a spur which slopes E.

57.50 Trail road bears NW. and SE.; asc. over S. slope.

80.00 Point for the cor. of secs. 26, 27, 34 and 35.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T41S R2E

$\frac{S27|S26}{S34|S35}$

1974

Land, rolling, broken desert.
Soil, sandy, clay loam.
Timber, sparsely scattered juniper; undergrowth, Brigham tea, shadscale, grass.

From the cor. of secs. 25, 26, 35, and 36.

S. 89° 59' W., bet. secs. 26 and 35.

Asc. over rocky E. slope.

2.90 Rim of mesa bears NW. and SE.; over level mesa top.

18.61 W. rim of mesa, bears NE. and S.; desc. over ledgy NW, slope.

35.36 Point chosen for the witness ¼ sec. cor. of secs. 26 and 35.

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground, in a collar of stone, with brass cap mkd.

WC
T41S R2E

$\frac{1}{4} \leftarrow \frac{S26}{S35}$

1974

39.94 True point for the ¼ sec. cor. of secs. 26 and 35, falls on an inaccessible slope and cannot be monumented.

Desc. over ledgy SW. slope.

51.00 Bottom of descent; thence along a S. slope.

79.88 The cor. of secs. 26, 27, 34, and 35.

Land, broken mountain.
Soil, sand, rocky.
Timber, scattered juniper on mesa; undergrowth, bunch grass, shadscale, Brigham tea.

N. 89° 58' W., bet. secs. 27 and 34.

Over gentle rolling land.

7.00 Trail road bears NW. and SE.

Subdivision of T. 41 S. R. 2 E. Salt Lake Meridian Utah

CHAINS
39.98

Point for the 1/4 sec. cor. of secs. 27 and 34.

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 6 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T41S R2E

1/4 S27
S34

1974

41.00 SE. rim of Ty Hatch Canyon, bears SW. and NW.

79.96 The cor. of secs. 27, 28, 33, and 34, monumented with an iron post, 30 ins. long, 2 1/2 ins. diam., 4 ins. in the ground, in a mound of stone, 3 1/2 ft. base to top, with brass cap mkd.

T41S R2E

S28|S27
S33|S34

1958

Land, broken and gentle rolling.

Soil, sand.

Timber, none; undergrowth, shadscale, grass, Brigham tea.

From the cor. of secs. 26, 27, 34 and 35.

N. 0° 01' W., bet. secs. 26 and 27.

Over rolling and broken land.

33.10 Spur, projects W.

40.00 Point for the 1/4 sec. cor. of secs. 26 and 27.

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 4 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T41S R2E

1/4 S27|S26

1974

sc. 880 ft. over a steep SW. slope of mesa.

73.50 Rim of mesa, bears NW. and SE.

80.00 Point for the cor. of secs. 22, 23, 26, and 27.

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 10 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T41S R2E

S22|S23
S27|S26

1974

Subdivision of T. 41 S., R. 2 E., Salt Lake Meridian, Utah

CHAINS

Land, rough, broken.
Soil, sandy, rocky.
Timber, scattered juniper on mesa; undergrowth, shadscale,
grass, Brigham tea.

From the cor. of secs. 23, 24, 25, and 26.

S. 89° 56' W., bet. secs. 23 and 26.

Asc. 680 ft. over steep, rocky E. slope.

20.20 E. rim of mesa, bears N. and S.; over mesa top.

26.47 SW. rim of mesa, bears SE. and NW.; desc. over steep
ledgy SW. slope.

39.94 Point for the $\frac{1}{4}$ sec. cor. of secs. 23 and 26.

Set an iron post, 30 ins. long, 2½ ins. diam., 2 ins. in
the ground, in a mound of stone, 3½ ft. base to top, with
brass cap mkd.

T41S R2E

$\frac{1}{4}$ $\frac{S23}{S26}$

1974

49.00 End descent; head of draw, drains SE.; asc. 600 ft. over
steep, ledgy E. slope.

69.00 Top of steep ascent, bears N. and S.; over mesa top.

79.88 The cor. of secs. 22, 23, 26, and 27.

Land, rough, broken.
Soil, sand, rocky.
Timber, scattered juniper on mesa; undergrowth,
shadscale, grass, Brigham tea.

S. 89° 55' W., bet. secs. 22 and 27.

Over rough, broken land.

14.00 W. rim of mesa bears, NW. and SE.; desc. steep W. slope.

40.04 Point for the $\frac{1}{4}$ sec. cor. of secs. 22 and 27.

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in
the ground, in a mound of stone, 3 ft. base to top, with
brass cap mkd.

T41S R2E

$\frac{1}{4}$ $\frac{S22}{S27}$

1974

80.08 The cor. of secs. 21, 22, 27, and 28, monumented with an
iron post, 30 ins. long, 2½ ins. diam., 16 ins. in the
ground, in a mound of stone, 3 ft. base to top, with
brass cap mkd.

Sudivision of T. 41 S., R. 2 E., Salt Lake Meridian Utah

CHAINS

T41S R2E

$\frac{S21|S22}{S28|S27}$

1958

Land, rough, broken.
Soil, sand, rocky.
Timber, scattered juniper, pinon; undergrowth, Brigham tea, grass, shadscale.

From the cor. of secs. 22, 23, 26, 27.

N. 0° 01' W., bet. secs. 22 and 23.

Asc. over rough and ledgy S. slope.

- 2.00 Top of ascent; desc. 640 ft. over rough and ledgy N. slope.
- 25.00 End of descent; head of canyon, drains N. 70° E.; asc. 400 ft. over rough and ledgy S. slope.
- 40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 22 and 23, falls on an inaccessible S. slope and cannot be monumented.
- 41.08 Point chosen for the witness $\frac{1}{4}$ sec. cor. of secs. 22 and 23.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 4 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.

WC
T41S R2E

$\frac{1}{2}$
S22↓S23

1974

Continue ascent over S. slope.

- 42.00 SE. rim of mesa, bears NE. and SW.
- 68.00 Desc. 420 ft. over steep N. slope.
- 80.00 Point for the cor. of secs. 14, 15, 22, and 23.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins. in the ground, in a mound of stone, $4\frac{1}{2}$ ft. base to top, with brass cap mkd.

T41S R2E

$\frac{S15|S14}{S22|S23}$

1974

Land, rough, broken.
Soil, sand, rocky.
Timber, scattered juniper and pinon; undergrowth, shadscale, grass, Brigham tea.

Subdivision of T. 41 S., R. 2 E., Salt Lake Meridian, Utah

CHAINS

From the true point for the cor. of secs. 13, 14, 23, and 24, from which the witness cor. bears N. 0° 01' W., 0.32 chs. dist.

S. 89° 59' W., bet. secs. 14 and 23.

Traverse over rough and broken N. slope.

39.95 Point for the ¼ sec. cor. of secs. 14 and 23.

Set an iron post, 30 ins. long, 2½ ins. diam., 16 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T41S R2E

¼ S14
S23

1974

79.90 The cor. of secs. 14, 15, 22, and 23.

Land, rough, broken.

Soil, sand, rocky.

Timber, scattered juniper and pinon; undergrowth, shadscale, grass, Brigham tea.

N. 89° 59' W., bet. secs. 15 and 22.

Over rough, broken land, along N. changing to NW. slope.

17.00 Small wash, drains N. 60° E.

28.00 Low spur, projects N. 60° E.

40.04 Point for the ¼ sec. cor. of secs. 15 and 22.

Set an iron post, 30 ins. long, 2½ ins. diam., 16 ins. in the ground, in a mound of stone, 4½ ft. base to top, with brass cap mkd.

T41S R2E

¼ S15
S22

1974

54.00 Desc. 320 ft. over steep SW. slope.

80.08 The cor. of secs. 15, 16, 21, and 22, monumented with an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T41S R2E

S16|S15
S21|S22

1958

Land, broken.

Soil, sandy, rocky.

Timber, scattered juniper, pinon; undergrowth, shadscale, grass, Brigham tea.

Subdivision of T. 41 S. R. 2 E. Salt Lake Meridian Utah

CHAINS

From the cor. of secs. 14, 15, 22, and 23.

N. 0° 01' W., bet. secs. 14 and 15.

Desc. over broken NE. slope.

5.50 Wash, drains irregularly E., asc. 680 ft. over steep SW. slope.

24.50 Rim of mesa, bears NW. and SE.

40.00 Point for the ¼ sec. cor. of secs. 14 and 15.

Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T41S R2E

¼
S15|S14

1974

42.50 Desc. over broken N. slope.

71.50 Draw, drains N. 60° E.; thence along an E. slope.

80.00 Point for the cor. of secs. 10, 11, 14, 15, on a low spur, slopes NE.

Set an iron post, 30 ins. long, 2½ ins. diam., 9 ins. in the ground, in a mound of stone, 4½ ft. base to top, with brass cap mkd.

T41S R2E

S10|S11
S15|S14

1974

Land, rough, broken.

Soil, sandy, rocky.

Timber, juniper, pinon; undergrowth, shadscale, grass, Brigham tea.

From the cor. of secs. 11, 12, 13, and 14.

N. 89° 57' W., bet. secs. 11 and 14.

Asc. over rocky and broken NE. slope.

23.00 Top of spur, slopes N., desc. over NW. slope to cor.

39.95 Point for the ¼ sec. cor. of secs. 11 and 14.

Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T41S R2E

¼ S11
S14

1974

Subdivision of T. 41 S., R. 2 E., Salt Lake Meridian, Utah

CHAINS

Thence along a broken N. slope.

74.50 Draw, drains irregularly NE.; asc. E. slope.

79.90 The cor. of secs. 10, 11, 14, and 15.

Land, rough, broken, mountain.

Soil, sand, rocky.

Timber, juniper, pinon; undergrowth, scattered grass, shadscale, Brigham tea, and weeds.

N. 89° 59' W., bet. secs. 10 and 15.

Over broken land, desc. over NW. slope.

13.00 Wash, drains irregularly NE.; thence along S. slope.

40.02 Point for the $\frac{1}{4}$ sec. cor. of secs. 10 and 15.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 16 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T41S R2E

$\frac{1}{4} \frac{S10}{S15}$

1974

46.50 Draw, drains irregularly SE.; asc. broken NE. slope.

74.00 Spur, slopes SE.

80.04 The cor. of secs. 9, 10, 15, 16, monumented with an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., on solid sandstone, in a mound of stone, $3\frac{1}{2}$ ft. base to top, with brass cap mkd.

T41S R2E

$\frac{S9|S10}{S16|S15}$

1958

Land, broken.

Soil, sand, rocky.

Timber, juniper, pinon; undergrowth, shadscale, grass, Brigham tea.

From the cor. of secs. 10, 11, 14, and 15.

N. 0° 07' W., bet. secs. 10 and 11.

Desc. broken NW. slope.

9.50 Wash, drains irregularly E.; asc. 800 ft. over a steep S. slope.

32.00 N. rim of canyon, bears E. and W.; asc. over gentle S. slope.

36.50 Top of ridge, bears E. and W.; desc. over N. slope.

40.05 Point for the $\frac{1}{4}$ sec. cor. of secs. 10 and 11.

Subdivision of T. 41 S., R. 2 E., Salt Lake Meridian Utah

CHAINS	
67.50	<p>Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.</p> <p style="text-align: center;">T41S R2E ¼ S10 S11 1974</p> <p>Desc. 720 ft. over a N. slope.</p>
76.00	<p>Wash, drains irregularly SE.</p>
80.10	<p>True point for the cor. of secs. 2, 3, 10 and 11, determined by extending the line from the ¼ sec. cor. of secs. 2 and 11 over the witness cor. and at record dist. from the witness cor. From the true point the witness cor. bears S. 89° 54' E., 0.65 chs. dist., monumented by an iron post, 30 ins. long, 2½ ins. diam., on solid sandstone, in a mound of stone, 4 ft. base to top, with brass cap mkd.</p> <p style="text-align: center;">T41S R2E W S3 S2 C S10 S11 1958</p> <p>Land, broken, mountain. Soil, sand, rocky. Timber, juniper, pinon; undergrowth, shadscale, grass, Brigham tea.</p>
35.00	<p>West, bet. secs. 3 and 10.</p> <p>Over broken land, along a N. slope.</p> <p>Wash, drains irregularly NE.</p>
38.59	<p>Point chosen for the witness ¼ sec. cor. of secs. 3 and 10.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.</p> <p style="text-align: center;">WC T41S R2E ¼ S3 S10 1974</p>
39.99	<p>True point for the ¼ sec. cor. of secs. 3 and 10, falls on a steep slope of exposed sandstone shelf and cannot be monumented. Asc. along a S. slope.</p>
79.98	<p>The true point for the cor. of secs. 3, 4, 9 and 10 was found to be on a line extended from the ¼ sec. cor. of secs. 3 and 4 over the witness cor. at record dist. from the witness cor. and at record bearing and dist. from the ¼ sec. cor. of secs. 9 and 10. From the true point the witness cor. bears N. 0° 02' E., 7.00 chs. dist., monumented by an iron post, 30 ins. long, 2½ ins. diam., on solid sandstone, in a mound of stone, 4 ft. base to top, with brass cap mkd.</p>

Subdivision of T. 41 S. R. 2 E.. Salt Lake Meridian, Utah

CHAINS

T41S R2E

$\frac{S4|S3}{S9\downarrow S10}$

WC
1958

Land, broken.
Soil, sand, rocky.
Timber, juniper, pinon; undergrowth, shadscale, grass,
Brigham tea.

From the cor. of secs. 27, 28, 33, 34.

S. 89° 58' W., bet. secs. 28 and 33.

Desc. over broken NW. slope.

28.00 Bottom of Ty Hatch Creek, drains irregularly SW.; asc.
SE. slope.

40.02 Point for the $\frac{1}{4}$ sec. cor. of secs. 28 and 33.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins. in
the ground, in a mound of stone, 4 ft. base to top, with
brass cap mkd.

T41S R2E

$\frac{\frac{1}{4} S28}{S33}$

1974

50.00 Spur, slopes SW.; desc. W. slope.

57.00 Bottom of wash, drains irregularly SW. into Ty Hatch
Creek; asc. SE. slope.

80.04 The cor. of secs. 28, 29, 32, and 33, monumented with an
iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., on solid sand-
stone, in a mound of stone, 4 ft. base to top, with brass
cap mkd.

T41S R2E

$\frac{S29|S28}{S32|S33}$

1958

Land, broken.
Soil, sandy and exposed sandstone.
Timber, none; undergrowth, grass, Brigham tea.

N. 0° 03' W., bet. secs. 28 and 29.

Asc. over SE. slope.

4.00 Base of ridge, bears NE. and SW.; asc. 480 ft. over steep,
rocky SE. slope.

35.40 Top of high, narrow spur, slopes SW.; desc. along rocky
W. slope.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 28 and 29.

Subdivision of T. 41 S., R. 2 E., S. 1 E. of the 10th T. 1 N.

CHAINS	
80.00	<p>Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground, against 4 ft. ledge, in a mound of stone, 4 ft. base to top, with brass cap mkd.</p> <p style="text-align: center;">T41S R2E</p> <p style="text-align: center;">½ S29 S28</p> <p style="text-align: center;">1974</p> <p>Desc. along a steep W. slope.</p> <p>Point for the cor. of secs. 20, 21, 28, and 29.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T41S R2E</p> <p style="text-align: center;">S20 S21 S29 S28</p> <p style="text-align: center;">1974</p> <p>Land, rough, broken, mountain. Soil, sand, rocky. Timber, none; undergrowth, weeds, grass, and Brigham tea.</p>
12.00	<p>From the cor. of secs. 21, 22, 27, and 28.</p> <p>S. 89° 57' W., bet. secs. 21 and 28.</p> <p>Desc. 200 ft. over steep W. slope.</p> <p>Bottom of canyon, drains irregularly SW.; asc. 320 ft. over broken E. slope.</p>
25.00	<p>Top of steep ascent; asc. gentle E. slope.</p>
40.05	<p>Point for the ¼ sec. cor. of secs. 21 and 28.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground, in a mound of stone, 4½ ft. base to top, with brass cap mkd.</p> <p style="text-align: center;">T41S R2E</p> <p style="text-align: center;">¼ S21 S28</p> <p style="text-align: center;">1974</p> <p>Asc. over gentle E. slope.</p>
73.00	<p>Rim of mesa, bears N. and S.; desc. 240 ft. over rocky W. slope.</p>
80.10	<p>The cor. of secs. 20, 21, 28, and 29.</p> <p>Land, broken desert. Soil, sand, rocky. Timber, juniper; undergrowth, sagebrush, Brigham tea.</p>
	<p>N. 0° 01' W., bet. secs. 20 and 21.</p> <p>Desc. along broken W. slope.</p>

Subdivision of T. 41 S., R. 2 E., Salt Lake Meridian, Utah

CHAINS
28.00

sh, in bottom of canyon, drains S. 20° W.

40.10

Point for the ¼ sec. cor. of secs. 20 and 21.

Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T41S R2E

¼
S20|S21

1974

Asc. along broken ravine.

68.00

Rim of canyon, bears SE. and SW.; over nearly level land.

80.20

The cor. of secs. 16, 17, 20, 21, monumented with an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T41S R2E

S17|S16
S20|S21

1958

Land, rough, broken.

Soil, sand, rocky.

Timber, scattered juniper; undergrowth, grass, shadscale, Brigham tea.

From the cor. of secs. 8, 9, 16, and 17, monumented with an iron post, 30 ins. long, 2½ ins. diam., on solid sandstone, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T41S R2E

S8|S9
S17|S16

1958

N. 0° 03' W., bet. secs. 8 and 9.

Along broken W. slope.

40.00

Point for the ¼ sec. cor. of secs. 8 and 9.

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground, in a mound of stone, 3½ ft. base to top, with brass cap mkd.

T41S R2E

¼
S8|S9

1974

Asc. 880 ft. over steep SW. slope.

Subdivision of T. 41 S. R. 2 E. Salt Lake Meridian Utah

CHAINS	
60.00	S. rim of mesa, bears NW. and E.
67.00	N. rim of mesa, bears NE. and SW.; desc. 520 ft. over steep NW. slope.
79.43	Point chosen for the witness cor of secs. 4, 5, 8, and 9. Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.
	WC T41S R2E S5↑S4 S8 S9 1974
80.00	True point for the cor. of secs. 4, 5, 8, and 9, falls on steep NW. slope and is unsafe to monument. Land, rough, broken. Soil, clay loam, rocky. Timber, juniper and pinon; undergrowth, shadscale, grass, Brigham tea.
	From the true point for the cor. of secs. 3, 4, 9, and 10. S. 89° 57' W., bet. secs. 4 and 9. Along steep S. slope.
39.99	Point for the ¼ sec. cor. of secs. 4 and 9. Set an iron post, 30 ins. long, 2½ ins. diam., on solid sandstone, in a mound of stone, 4 ft. base to top, with brass cap mkd.
	T41S R2E ¼ S4 S9 1974
51.00	E. rim of mesa, bears N. and S.
60.40	Jeep trail, bears irregularly N. 20° E. and S. 20° W.
65.10	W. rim of mesa, bears N. and SW.; desc. 550 ft. over steep NW. slope.
79.98	The true point for the cor. of secs. 4, 5, 8, and 9. Land, rough, broken, mountain. Soil, clay loam, rocky. Timber, juniper, pinon; undergrowth, grass, shadscale, Brigham tea.
	N. 0° 03' W., bet. secs. 4 and 5. Desc. along NW. slope.
9.00	Slope changes; thence along a W. slope.
26.00	Wash, drains irregularly W.; asc. 290 ft. along SW. slope.

Subdivision of T. 41 S., R. 2 E., Salt Lake Meridian. Utah

CHAINS
40.00Point for the $\frac{1}{4}$ sec. cor. of secs. 4 and 5.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 12 ins. in the ground, in a mound of stone, $4\frac{1}{2}$ ft. base to top, with brass cap mkd.

T41S R2E

 $\frac{1}{4}$
S5|S4

1974

Asc. 200 ft. along SW. slope.

53.00 Rim of mesa bears N. and SE.; thence along W. rim of mesa.

86.18 Intersect the Eighth Standard Parallel South.

Point for the closing cor. of secs. 4 and 5.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 2 ins. in the ground, in a mound of stone, $4\frac{1}{2}$ ft. base to top, with brass cap mkd.

T40S R2E

S33
S5|S4

CC

T41S R2E

1974

From which the Standard Corner of secs. 32 and 33, T. 40 S., R. 2 E., bears West 0.11 chs. dist., monumented with an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., on solid surface rock, in a large mound of stone with brass cap mkd.

SC
T40S R2ES32|S33

1956

From the same point, the standard $\frac{1}{4}$ sec. cor. of sec. 33, bears E. 39.89 chs. dist., hereinafter described.

Land, rough, broken.

Soil, sand, rocky.

Timber, juniper, pinon; undergrowth, shadscale, grass, Brigham tea.

The point for the $\frac{1}{4}$ sec. cor. of sec. 4 only, on the N. bdy. of the Tp., at midpoint bet. the closing cor. of secs. 4 and 5, and the closing cor. secs. 3 and 4.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.

 $\frac{1}{4}$ S4

T41S R2E

1974

Subdivision of T. 41 S., R 2 E., Salt Lake Mesa

CHAINS

From this point, the standard $\frac{1}{4}$ sec. cor. of sec. 33, T. 40 S., R. 2 E., bears West, 0.11 chs. dist., monumented with an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 16 ins. in the ground, surrounded by a collar of stone, with brass cap mkd.

SC
T40S R2E

$\frac{1}{4}$ S33

1956

From the cor. of secs. 29, 30, 31, and 32.

West, bet. secs. 30 and 31.

Asc. 600 ft. over steep, broken E. slope.

28.00 Spur, slopes N.; desc. 120 ft. along N. slope.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 30 and 31.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., on solid sandstone, in a mound of stone, $4\frac{1}{2}$ ft. base to top, with brass cap mkd.

T41S R2E

$\frac{1}{4}$ S30
S31

1974

Asc. 520 ft. over an E. slope.

51.00 E. rim of mesa, bears NW. and S.; thence along gentle N. slope.

79.55 Intersect the E. bdy. of sec. 36, T. 41 S., R. 1 E.

Point for the closing cor. of secs. 30 and 31.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T41S
R1E R2E

| S30 C
S36 | S31 C

1974

From this point the cor. of secs. 25, 30, 31, and 36, bears North 0.60 chs. dist., monumented by an iron post, 36 ins. long, 2 ins. diam., 6 ins. in the ground to bed-rock, 18 ins. in a mound of stone, 4 ft. base, this cor. will now function for the cor. of secs. 25 and 36 only, of T. 41 S., R. 1 E., and was remarked to read

T41S
R1E R2E

S25 | S30
S36 |

1974
1917

Sudivision of T. 41 S., R. 2 E., Salt Lake Meridian, Utah

CHAINS

from which

A cedar, 11 ins. diam., bears N. $32\frac{1}{2}^{\circ}$ E., 120 lks. dist., mkd. T41SR2ES30BT.

A cedar, 10 ins. diam., bears S. $28\frac{1}{2}^{\circ}$ E., 130 lks. dist., mkd. T41SR2ES31BT.

A cedar, 12 ins. diam., bears S. 2° W., 126 lks. dist., mkd. T41SR1ES36BT.

A cedar, 8 ins. diam., bears N. 42° W., 76 lks. dist., mkd. T41SR1ES25BT.

From the same point the $\frac{1}{4}$ sec. cor. of sec. 36, T. 41 S., R. 1 E., bears S. 39.40 chs. dist. previously described.

Land, rough, mountain.

Soil, sandy loam, rocky.

Timber, juniper and pinon; undergrowth, sagebrush and grass.

The point for the W. $\frac{1}{4}$ sec. cor. of sec. 31, T. 41 S., R. 2 E. only, is at midpoint bet. the true point for the cor. of Tps. 41 and 42 S., Rs. 1 and 2E. and the closing cor. of secs. 30 and 31.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 2 ins. in the ground in a mound of stone, 4 ft. base to top, with brass cap mkd.

T41S
R1E R2E

| $\frac{1}{4}$
| S31

1974

From this point the $\frac{1}{4}$ sec. cor. of sec. 36, T. 41 S., R. 1 E. only, bears North 0.36 chs. dist., hereinbefore described.

From the cor. of secs. 29, 30, 31, and 32.

N. $0^{\circ} 03'$ W., bet. secs. 29 and 30.

Along the bottom of Wahweap Creek.

26.40 Middle of Wahweap Creek, drains E.; asc. over S. slope.

37.95 N. rim of Wahweap Creek, bears NW. and SE.; asc. over SW. slope.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 29 and 30.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 5 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T41S R2E

$\frac{1}{4}$
S30|S29

1974

Asc. over SW. slope.

Subdivision of T. 41 S., R. 2 E., Salt Lake Meridian Utah

CHAINS

- 80.00 True point for the cor. of secs. 19, 20, 29, and 30, falls near rim of ledge and is unsafe to monument, from which the witness cor. bears N. 0° 03' W., 0.30 chs. distance, hereinafter described.
- Land, broken.
Soil, sandy loam.
Timber, none; undergrowth, shadscale, grass, Brigham tea.
-
- From the cor. of secs. 20, 21, 28, and 29.
- S. 89° 57' W., bet. secs. 20 and 29.
- Desc. W. slope.
- 12.00 Wash in bottom of canyon, drains S. 30° W.; asc. 480 ft. over broken E. slope.
- 39.96 True point for the ¼ sec. cor. of secs. 20 and 29, falls on steep slope and sandstone boulder and cannot be monumented.
- 40.02 Point selected for the witness ¼ sec. cor. of secs. 20 and 29.
- Set an iron post, 30 ins. long, 2½ ins. diam., 4 ins. in the ground, in a mound of stone, 4½ ft. base to top, with brass cap mkd.
- WC
T41S R2E
- ¼ $\begin{matrix} \text{S20} \\ \text{S29} \end{matrix}$ →
- 1974
- Asc. over ledgy SE. slope.
- 40.50 Rim of mesa, bears SW. and NE.; asc. over gentle E. slope on mesa top.
- 62.90 Leave mesa top; desc. 580 ft. over steep W. slope.
- 79.92 True point for the cor. of secs. 19, 20, 29, and 30.
- Land, broken, mountain.
Soil, sand, rocky.
Timber, scattered juniper and pinon on mesa top; undergrowth, shadscale, grass, Brigham tea.
-
- West, bet. secs. 19 and 30.
- Desc. 160 ft. over broken W. slope.
- 5.50 Bottom of Tommy Canyon, drains irregularly S.; asc. 170 ft. over SE. slope.
- 20.20 Top of spur, slopes S.; desc. gradually over SW. slope.
- 40.00 Point for the ¼ sec. cor. of secs. 19 and 30.
- Set an iron post, 30 ins. long, 2½ ins. diam., 5 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.

Subdivision of T. 41 S., R. 2 E., Salt Lake Meridian, Utah

CHAINS

T41S R2E

$\frac{1}{4} \frac{S19}{S30}$

1974

52.50 Bottom of wash from Long Flat Canyon, drains irregularly S. into Wahweap Creek.

59.50 Bottom of Wahweap Creek, drains irregularly SE.; asc. NE. slope.

79.52 Intersect the E. bdy. of sec. 25, T. 41 S., R. 1 E.

Point for the closing cor. of secs. 19 and 30.

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground, in a mound of stone, 3 ft. base to top, with brass cap mkd.

T41S
R1E R2E

S25 | S19 C
 | S30 C

1974

From this point the cor. of secs. 19, 24, 25, and 30, bears North 0.72 chs. dist., monumented with an iron post, 36 ins. long, 2 ins. diam., 6 ins. in the ground to bed-rock, 18 ins. in a mound of stone, 3½ ft. base. This cor. will now function for the cor. of secs. 24 and 25, T. 41 S., R. 1 E., only and was remarked

T41S
R1E R2E

S24 | S19
S25 |

1974
1917

From the same point the ¼ sec. cor. of sec. 25, T. 41 S., R. 1 E., bears S. 39.28 chs. dist. hereinafter described.

Land, broken.

Soil, sand, rocky.

Timber, none; undergrowth, scattered grass shadscale, Brigham tea.

The point for the W. ¼ sec. cor. of sec. 30, T. 41 S., R. 2 E., only is at midpoint bet. the closing cor. of secs. 19 and 30 and the closing cor. of secs. 30 and 31.

Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T41S
R1E R2E

| ¼
| S30

1974

Subdivision of T. 41 S., R. 2 E., Salt Lake Meridian. U.S.

CHAINS

From which the $\frac{1}{4}$ sec. cor. of sec. 25, T. 41 S., R. 1 E., only bears North 0.66 chs. dist., monumented with an iron post, 36 ins. long, 1 ins. diam., 10 ins. in the ground, 16 ins. in a mound of stone, 3 ft. base. This cor. will now function for the $\frac{1}{4}$ sec. cor. of sec. 25, T. 41 S., R. 1 E., only and was remarked to read.

T41S
R1E R2E

$\frac{1}{4}$
S25|

1974
1917

From the true point for the cor. of secs. 19, 20, 29, and 30.

N. 0° 03' W., bet. secs. 19 and 20.

Along the broken W. slope on the E. side of Tommy Canyon.

0.30 Point selected for the witness cor of secs. 19, 20, 29, and 30.

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.

WC
T41S R2E

S19|S20
S30|S29

1974

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 19 and 20.

Set an iron post, 30 ins. long, 2½ ins. diam., 5 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T41S R2E

$\frac{1}{4}$
S19|S20

1974

52.00 Bottom of Tommy Canyon, drains irregularly S. 20° W.; asc. 360 ft. over steep SE. slope.

80.00 True point for the cor. of secs. 17, 18, 19, and 20, falls on an inaccessible slope and cannot be monumented, from which the witness cor. bears N. 0° 03' W., 2.23 chs. distance, hereinafter described.

Land, rough, broken.
Soil, sand, rocky.
Timber, none; undergrowth, scattered shadscale, grass, Brigham tea.

From the cor. of secs. 16, 17, 20, and 21.

Subdivision of T. 41 S., R. 2 E., Salt Lake Meridian, Utah

CHAINS

S. 89° 59' W., bet. secs. 17 and 20.

Over gentle rolling land.

15.60 Point road, bears NW. and S. 85° E.

39.97 Point for the $\frac{1}{4}$ sec. cor. of secs. 17 and 20.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T41S R2E

$\frac{1}{4} \frac{S17}{S20}$

1974

50.00 E. rim of Tommy Canyon, bears NE. and S.; desc. 440 ft. over steep W. slope.

66.00 Bottom of Tommy Canyon, drains irregularly SW.; asc. 320 ft. over steep SE. slope.

79.94 True point for the cor. of secs. 17, 18, 19, and 20.

Land, broken.

Soil, sand, rocky.

Timber, scattered juniper; undergrowth, sagebrush, grass.

West, bet. secs. 18, and 19.

Asc. over steep SE. slope.

2.00 W. rim of canyon, bears NE. and SW.; thence over rolling land.

22.10 E. rim of Long Flat Canyon, bears N. and S.; desc. 440 ft. over ledgy W. slope.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 18 and 19.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T41S R2E

$\frac{1}{4} \frac{S18}{S19}$

1974

Continue descent over ledgy W. slope.

46.00 Bottom of Long Flat Canyon, drains irregularly S.; asc. 520 ft. over steep E. slope.

62.00 W. rim of Long Flat Canyon, bears N. and S.

79.67 Intersect the E. bdy. of sec. 24, T. 41 S., R. 1 E.

Point for the closing cor. of secs. 18 and 19.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

Subdivision of T. 41 S., R. 2 E., Salt Lake Meridian, Utah

CHAINS

T41S
R1E R2E

|S18 C
S24|S19 C

1974

From this point the cor. of secs. 13, 18, 19, and 24 bears North 0.51 chs. dist., monumented with an iron post, 36 ins. long, 2 ins. diam., 24 ins. in a mound of stone, 4 ft. base. This cor. will now function for the cor. of secs. 13 and 24, T. 41 S., R. 1 E. only and was remarked to read

T41S
R1E R2E

S13|S18
S24|

1974
1917

From the same point the true point for the $\frac{1}{4}$ sec. cor. of secs. 24, T. 41 S., R. 1 E., bears S. 39.49 chs. dist. and is witnessed S. 13.53 chs. dist. hereinafter described.

Land, broken and rolling.

Soil, sand, rocky.

Timber, juniper, pinon; undergrowth, sagebrush, grass, Brigham tea.

The point for the W. $\frac{1}{4}$ sec. cor. on the W. bdy. of sec. 19 at midpoint bet. the closing cors. of secs. 18 and 19, and 19 and 30. This point falls on rough sandstone ledges and cannot be monumented.

From this point, the witness cor. of the $\frac{1}{4}$ sec. cor. of secs. 19 and 24 bears South 12.915 chs. dist., monumented with an iron post, 36 ins. long, 1 in. diam., 12 ins. in the ground, 14 ins. in a mound of stone, 3 ft. base. This cor. will now function for the witness $\frac{1}{4}$ sec. cor. of sec. 24 only, T. 41 S., R. 1 E., and was remarked

WC

$\frac{1}{4}$
S24↑

1917
1974

From the true point for the cor. of secs. 17, 18, 19, and 20.

N. $0^{\circ} 03'$ W., bet. secs. 17 and 18.

Asc. over a steep SE. slope.

2.23

W. rim of canyon, bears SW. and N. Point chosen for the witness cor. of the cor. of secs. 17, 18, 19, and 20.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 4 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.

Subdivision of T. 41 S., R. 2 E., Salt Lake Meridian. Utah

CHAINS

WC
T41S R2E

$\frac{S18|S17}{S19\downarrow S20}$

1974

Thence over gently rolling land.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 17 and 18.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 2 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T41S R2E

$\frac{1}{4}$
S18|S17

1974

80.00 Point for the sec. cor. of secs. 7, 8, 17, and 18.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 3 ins. in the ground, in a mound of stone, $4\frac{1}{2}$ ft. base to top, with brass cap mkd.

T41S R2E

$\frac{S7|S8}{S18|S17}$

1974

Land, gentle, rolling.

Soil, sand.

Timber, juniper, pinon; undergrowth, sagebrush, grass, Brigham tea.

From the cor. of secs. 8, 9, 16, and 17.

S. $89^{\circ} 57'$ W., bet. secs. 8 and 17.

Over rolling land.

3.00 Wash, drains N.

27.00 Wash in bottom of Pet Hollow, drains irregularly S.

39.97 Point for the $\frac{1}{4}$ sec. cor. of secs. 8 and 17.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins. in the ground, in a mound of stone, $4\frac{1}{2}$ ft. base to top, with brass cap mkd.

T41S R2E

$\frac{1}{4} \frac{S8}{S17}$

1974

79.94 The cor. of secs. 7, 8, 17, and 18.

Subdivision of T. 41 S., R. 2 E., ...

CHAINS

Land, rolling.
Soil, sand, rocky.
Timber, juniper, pinon; undergrowth, shadscale, grass, Brigham tea.

West, bet. secs. 7 and 18.

- 7.20 E. rim of Smith Run Canyon, bears N. and S., desc. 240 ft. over steep W. slope.
17.10 Bottom of Smith Run Canyon, drains irregularly S.; asc. 280 ft. over steep E. slope.
30.50 W. rim of Smith Run Canyon, bears NE. and SW.
40.00 Point for the 1/4 sec. cor. of secs. 7 and 18.; over rolling land.

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 4 ins. in the ground, in a mound of stone, 4 1/2 ft. base to top, with brass cap mkd.

T41S R2E

1/4 S7 / S18

1974

- 79.65 Intersect the E. bdy. of sec. 13, T. 41 S., R. 1 E.

Point for the closing cor. of secs. 7 and 18, falls in bottom of wash, which drains SE., and is unsafe to monument.

From this point, the point for the witness closing cor. of secs. 7 and 18 bears North 0.17 chs. dist. Set an iron post, 30 ins. long, 2 1/2 ins. diam., 4 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.

WC
T41S
R1E R2E

S13 | S7 C
 ↓ S18 C

1974

From the true point of the closing cor. of secs. 7 and 18, the cor. of secs. 7, 12, 13, and 18, bears North 0.58 chs. dist., monumented with an iron post, 36 ins. long, 2 ins. diam., 24 ins. in a mound of stone, 4 ft. base, this cor. will now function for secs. 12 and 13 only, T. 41 S., R. 1 E., and was remarked to read

T41S
R1E R2E

S12 |
S13 | S7

1974
1917

From the same point the 1/4 sec. cor. of sec. 13, T. 41 S., R. 1 E., bears S. 39.42 chs. dist. hereinafter described.

Subdivision of T. 41 S. R. 2 E. Salt Lake Meridian Utah

CHAINS

Land, broken in the first half mile, rolling in the second half mile.
Soil, sand, rocky.
Timber, juniper, pinon; undergrowth, sagebrush, shadscale grass.

The point for the W. $\frac{1}{4}$ sec. cor. of sec. 18 only, T. 41 S., R. 2 E., is at midpoint bet. the closing cors. of secs. 7 and 18, and secs. 18 and 19 on the W. bdy. of sec. 18.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 2 ins. in the ground, and in a collar of stone, with brass cap mkd.

T41S
R1E R2E

$\frac{1}{4}$
|S18

1974

From this cor., the $\frac{1}{4}$ sec. cor. of secs. 13 and 18, bears North 0.545 chs. dist., monumented with an iron post, 36 ins. long, 1 in. diam., 24 ins. in a mound of stone, now to function for the $\frac{1}{4}$ sec. cor. for sec. 13 only, T. 41 S., R. 1 E., and was remarked to read

$\frac{1}{4}$
S13|

1974

1917

from which

A cedar, 10 ins. diam., bears S. 15° E., 113 lks. dist., mkd. $\frac{1}{4}$ S18BT.

A cedar, 24 ins. diam., bears S. $13\frac{1}{2}^\circ$ E., 129 lks. dist., mkd. $\frac{1}{4}$ S13BT.

From the cor. of secs. 7, 8, 17, and 18.

N. $0^\circ 03'$ W., bet. secs. 7 and 8.

Over rolling and broken land.

- 17.90 SE. edge of Smith Run Canyon, desc. steep NW. slope.
- 26.00 Bottom of Smith Run Canyon, drains irregularly SW.; along W. side of canyon.
- 36.00 Bottom of Smith Run, drains irregularly SE., asc. S. side of spur sloping W.
- 40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 7 and 8.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., on solid sandstone, in a mound of stone, 5 ft. base to top, with brass cap mkd.

T41S R2E

$\frac{1}{4}$
S7|S8

1974

Subdivision of T. 41 S., R. 2 E., Salt Lake Meridian, U.S.G.P.

CHAINS

- 41.50 Top of low spur sloping W.; desc. NW. slope.
- 45.40 Bottom of Smith Run Canyon, drains S. 75° W.; asc. 200 ft. over steep S. slope.
- 52.00 Top of steep ascent; over gently rolling land.
- 80.00 Point for the sec. cor. of secs. 5, 6, 7 and 8.
- Set an iron post, 30 ins. long, 2½ ins. diam., on solid sandstone, in a mound of stone, 5 ft. base to top with brass cap mkd.

T41S R2E

$\frac{S6|S5}{S7|S8}$

1974

Land, rolling, broken.
Soil, sand, rocky.
Timber, juniper, pinon; undergrowth, sagebrush, grass, Brigham tea.

From the cor. of secs. 4, 5, 8, and 9.

S. 89° 58' W., bet. secs. 5 and 8.

Desc. over broken W. slope.

- 39.97 Point for the ¼ sec. cor. of secs. 5 and 8.
- Set an iron post, 30 ins. long, 2½ ins. diam., 4 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T41S R2E

$\frac{¼ S5}{S8}$

1974

- 73.10 Bottom of Smith Run Canyon, drains irregularly S.

- 79.94 The cor. of secs. 5, 6, 7, and 8.

Land, rough, broken.
Soil, sand, rocky.
Timber, juniper, pinon; undergrowth, shadscale, grass, Brigham tea.

West, bet. secs. 6 and 7.

Asc. SE. slope.

- 40.00 Point for the ¼ sec. cor. of secs. 6 and 7.
- Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground, in a mound of stone, 4½ ft. base to top, with brass cap mkd.

Subdivision of T. 41 S., R. 2 E., Salt Lake Meridian, Utah

CHAINS

T41S R2E

$\frac{1}{4} \frac{S6}{S7}$

1974

- 69.00 N. point of mesa, rim bears NE. and SW.
- 70.85 W. rim of mesa, bears NW. and S.; desc. over steep broken W. slope.
- 79.57 Intersect the E. bdy. of sec. 12, T. 41 S., R. 1 E.

Point for the closing cor. of secs. 6 and 7.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 8 ins. in the ground, in a mound of stone, $4\frac{1}{2}$ ft. base to top, with brass cap mkd.

T41S
R1E R2E

$\frac{S6}{S7} C$
S12

1974

From this cor., the cor. of secs. 1, 6, 7, and 12 bears North 0.66 chs. dist., monumented with an iron post, 36 ins. long, 2 ins. diam., 4 ins. in the ground and 20 ins. in a mound of stone, $3\frac{1}{2}$ ft. base. This cor. will now function for secs. 1 and 12 only, T 41 S., R. 1 E., and was remarked to read

T41S
R1E R2E

$\frac{S1}{S12} | S6$

1974
1917

From the same point the $\frac{1}{4}$ sec. cor. of sec. 12, T. 41 S., R. 1 E., bears S. 39.34 chs. dist., hereinafter described.

Land, broken.

Soil, sand, rocky.

Timber, juniper, pinon; undergrowth, sagebrush, grass.

Point for the W. $\frac{1}{4}$ sec. cor. of sec. 7 only, T. 41 S., R. 2 E., is at the midpoint on the W. bdy. of sec. 7.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins. in the ground, and in a collar of stone, with brass cap mkd.

T41S
R1E R2E

$\frac{1}{4} | S7$

1974

From this cor., the $\frac{1}{4}$ sec. cor. of secs. 7 and 12 bears North 0.62 chs. dist., monumented with an iron post, 36 ins. long, 3 ins. diam., 10 ins. in the ground, 14 ins. in a mound of stone, 4 ft. base. This cor. will now function for the $\frac{1}{4}$ sec. cor. of sec. 12 only, T. 41 S., R. 1 E., and was remarked to read

CHAINS

T41S
R1E R2E
 $\frac{1}{4}$
S12|
1974
1917

Point for the W. $\frac{1}{4}$ sec. cor. of sec. 6 only at 40.00 chs. of northing from the closing cor of secs. 6 and 7.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 4 ins. in the ground, in a mound of stone, $4\frac{1}{2}$ ft. base to top, with brass cap mkd.

T41S
R1E R2E
| $\frac{1}{4}$
|S6
1974

From this cor., the $\frac{1}{4}$ sec. cor. of secs. 1 and 6 bears North 0.66 chs. dist., monumented with an iron post, 36 ins. long, 1 in. diam., 26 ins. in a mound of stone, 4 ft. base. This cor. will now function for the $\frac{1}{4}$ sec. cor. for sec. 1 only, T. 41 S., R. 1 E., and was remarked to read

$\frac{1}{4}$
S1|
1974
1917

from which

A pinon, 12 ins. diam., bears N $38\frac{1}{2}^{\circ}$ E., 74 lks. dist., mkd., $\frac{1}{4}$ S6BT.

A cedar, 8 ins. diam., bears N. 14° W., 12 lks. dist., mkd., $\frac{1}{4}$ S1BT.

From the same point the cor. of secs. 1 and 12 T. 41 S., R. 1 E., bears S. 39.34 chs. dist., previously described.

From the cor. of secs. 5, 6, 7, and 8.

N. $0^{\circ} 03'$ W., bet. secs. 5 and 6.

Over rolling land.

40.00 Point for the $\frac{1}{4}$ sec. cor. of secs. 5 and 6.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 12 ins. in the ground, in a mound of stone, $4\frac{1}{2}$ ft. base to top, with brass cap mkd.

T41S R2E
 $\frac{1}{4}$
S6|S5
1974

42.50 Bottom of Smith Run Canyon, drains irregularly S. 10° E.

86.15 Intersect the Eighth Standard Parallel South on the S. bdy. of sec. 32, T. 40 S., R. 2 E.

CHAINS

Point for closing cor. of secs. 5 and 6.

Set an iron post, 30 ins. long, 2½ ins. diam., 14 ins. in the ground, in a mound of stone, 3 ft. base to top, with brass cap mkd.

T40S R2E

S32
S6|S5
C C

T41S R2E
1974

From which the Standard Cor. of secs. 31 and 32, T. 40 S., R. 2 E., bears West 0.105 chs. dist., monumented with an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, surrounded by a collar of stone, with brass cap mkd.

SC
T40S R2E

S31|S32
1956

From the same point the true point for the Standard ¼ sec. cor. of sec. 32 bears E. 39.895 chs. dist. and is witnessed E. 7.65 chs. dist., hereinafter described.

Land, rolling, broken.

Soil, sand, rocky.

Timber, juniper, pinon; undergrowth, sagebrush, grass.

The point for the N. ¼ sec. cor. of sec. 6 only, is at 40.00 chs. westing from the closing cor. of secs. 5 and 6 falls in the bottom of wash draining S. 80° E., and is unsafe to monument.

From this point, the point for the witness N. ¼ sec. cor. of sec. 6, bears East 0.90 chs. dist.

Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground, in a mound of stone, 4½ ft. base to top, with brass cap mkd.

WC

← ¼S6

T41S R2E
1974

From the true point, the Standard ¼ sec. cor. of sec. 31, T. 40 S., R. 2 E., bears West 0.105 chs. dist., monumented with an iron post, 30 ins. long, 2½ ins. diam., in a large mound of stone, with brass cap mkd.

SC
T40S R2E

¼ S31
1956

CHAINS

The point for the N. $\frac{1}{4}$ sec. cor. sec. 5 only, is at midpoint bet. the closing cors. of secs. 4 and 5, and 5 and 6. Point falls on rocky W. slope and is not monumented.

From this point, the true point for the Standard $\frac{1}{4}$ sec. cor. of sec. 32 bears West 0.11 chs. dist., and is witnessed East 7.65 chs. dist., with an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., in a large mound of stone, with brass cap mkd.

SC
T40S R2E
 $\frac{1}{4}$ S32 WC
1956

The point for the $\frac{1}{4}$ sec. cor. of sec. 3 only, on the N. bdy. of the Tp., is at midpoint on the N. bdy. of sec. 3, bet. the closing cor. of sec. 3 and 4, and the true point for the cor. of secs. 2 and 3.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 5 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.

$\frac{1}{4}$ S3
T41S R2E
1974

From this point the Standard $\frac{1}{4}$ sec. cor. of sec. 34, T. 40 S., R. 2 E., bears West 0.095 chs. dist., monumented with an iron post, 36 ins. long, 1 in. diam., on solid surface rock, in a large mound of stone, with brass cap mkd.

SC
T40S R2E
 $\frac{1}{4}$ S34
1956

From the same point the true point for the Standard cor. of secs. 34 and 35 bears E. 39.905 chs. dist., and is witnessed E. 0.81 chs. dist., with an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., in a large mound of stone, with brass cap mkd.

S C
T40S R2E
 $\frac{1}{4}$ S34 | S35 WC
1956

The point for the $\frac{1}{4}$ sec. cor. of sec. 1 only, on the N. bdy. of the Tp., is at the midpoint on the N. bdy. of sec. 1, bet. the true point for the cor. of secs. 1 and 2, and the closing cor. of Tps. 41 S., Rs. 2 and 3 E.

Subdivision of T. 41 S., R. 2 E., Salt Lake Meridian, Utah

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

$\frac{1}{4}$ S1

T41S R2E
1974

From this point the Standard $\frac{1}{4}$ sec. cor. of sec. 36, T. 40 S., R. 2 E., bears West 0.035 chs. dist., monumented with an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground, with brass cap mkd.

SC
T40S R2E

$\frac{1}{4}$ S36

1956

From the same point the Standard cor. of Tps. 40 S., Rs. 2 and 3 E. bears E. 39.965 chs. dist., monumented with an iron post 30 ins. long, $2\frac{1}{2}$ ins. diam., in a large mound of stone, with brass cap mkd.

SC
T40S
R2E R3E

S36|S31

1956

GENERAL DESCRIPTION

The land in T. 41 S., R. 2 E., ranges in elevation from about 4,400 to 6,360 ft. above sea level. The Tp. contains high desert buttes and deep canyons. The soil is mainly sand with considerable exposed sandstone and sandstone ledges. The timber consists of juniper and pinon found predominantly in the Northern half of the Tp. and on the mesa tops. The West half of the Tp. is drained by Wahweap Creek, which runs through the SW. corner of the Tp. The East half of the Tp. is drained by John Henry Canyon, which starts near the center of the Tp. and drains SE. The principal mineral found in the Tp. is coal.

The average of number of readings throughout the Tp. gives a value of $14^{\circ} 30'$ E. for the mean magnetic declination.

Blank

Page

40
CERTIFICATE OF SURVEY

(I) ~~XXX~~, Jerry L. Thomas, , HEREBY
CERTIFY upon honor that, in pursuance of special instructions bearing date of the 19th day
of April, 1974, (I) ~~XXX~~ have dependently resurveyed a portion
of the west boundary and surveyed a portion of the subdivisional lines
of T. 41 S., R. 2 E.,

of the Salt Lake Meridian, in the State of Utah, which
are represented in the foregoing field notes as having been executed by (me), ~~XXX~~ and under (my)
(~~XXX~~) direction; and that said survey has been made in strict conformity with said special instruc-
tions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in
specific manner described in the foregoing field notes.

January 6, 1975
(Date)

Jerry L. Thomas
(Cadastral Surveyor)
Supervisory

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

SUBMITTED FOR APPROVAL
Date MAR 14 1975

BUREAU OF LAND MANAGEMENT
Washington, D.C.

The foregoing field notes of the dependent resurvey of a portion of the west
boundary and the survey of a portion of the subdivisional lines of
T. 41 S., R. 2 E., Salt Lake Meridian, Utah

executed by Jerry L. Thomas, Supervisory Cadastral Surveyor
having been critically examined and found correct, are hereby approved.

AUG 14 1975
(Date)

J. J. [Signature]
Acting (Chief, Division of Cadastral Survey)

CERTIFICATE OF TRANSCRIPT

~~I CERTIFY That the foregoing transcript of the field notes of the above described surveys in~~
~~_____ is a true copy of the original field notes.~~

~~_____
(Date)~~

~~_____
(Chief, Division of Cadastral Survey) - 698-018~~

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
ORIGINAL

Fishlake National Forest

FIELD NOTES
OF THE

REMONUMENTATION OF CORNERS

IN

TOWNSHIP 20 SOUTH, RANGE 2 WEST

TOWNSHIP 24 SOUTH, RANGE 4½ WEST

TOWNSHIP 25 SOUTH, RANGE 5 WEST

TOWNSHIP 26 SOUTH, RANGE 2 WEST

TOWNSHIP 26 SOUTH, RANGE 5 WEST

TOWNSHIP 28 SOUTH, RANGE 2 WEST

TOWNSHIP 29 SOUTH, RANGE 2 WEST

TOWNSHIP 29 SOUTH, RANGE 2½ WEST

TOWNSHIP 29 SOUTH, RANGE 4 WEST

TOWNSHIP 29 SOUTH, RANGE 5 WEST

Of the SALT LAKE Meridian,

In the State of UTAH

EXECUTED BY

Ferrel D. Reynolds, Cadastral Surveyor

Under special instructions dated February 15, 19 61, which provided for the surveys included under Group Number 447, approved February 16, 1961, and assignment instructions dated June 1, 19 70.

Survey commenced October 5, 19 70

Survey completed October 29, 19 70

INDEX DIAGRAM

Township _____, Range _____,

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

INDEX TO SECTION CORNER MONUMENTS

Tp. 20 S. R. 2 W. Mer. Salt Lake

6	5	4	3	2	1
7	8	9	10	11	12
18	17	2 ● 1	16 ● 2	15	14
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Tp. 24 S. R. 4¹ W. Mer Salt Lake

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25 ● 3
31	32	33	34	35	36 ● 2

Tp. 25 S. R. 5 W. Mer. Salt Lake

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32 ● 4	33	34 ● 4	35	36

Blank

Page

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

INDEX TO SECTION CORNER MONUMENTS

Tp. 26 S. R. 2 W. Mer. Salt Lake

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Monument locations: 6 (top right), 7 (row 4, col 4), 5 (row 5, col 6), 5 (row 6, col 6).

Tp. 26 S R. 5 W. Mer. Salt Lake

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Monument locations: 8 (row 2, col 1), 8 (row 2, col 3).

Tp. 28 S. R. 2 W. Mer. Salt Lake

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Monument location: 9 (row 6, col 1).

Blank

Page

UNITED STATES
 DEPARTMENT OF THE INTERIOR
 BUREAU OF LAND MANAGEMENT

INDEX TO SECTION CORNER MONUMENTS

Tp. 29 S. R. 2 W. Mer. Salt Lake

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30 10	29 9	28	27	26	25
31	32	33	34	35	36

Tp. 29 S. R. 2½ W. Mer. Salt Lake

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	12	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Tp. 29 S. R. 4 W. Mer. Salt Lake

6 14	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Blank

Page

UNITED STATES
 DEPARTMENT OF THE INTERIOR
 BUREAU OF LAND MANAGEMENT

INDEX TO SECTION CORNER MONUMENTS

Tp. 29 S. R. 5 W. Mer. Salt Lake

6	5	4	3 ₁₆	2	1 ₁₆
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Tp. _____ R. _____ Mer. _____

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Tp. _____ R. _____ Mer. _____

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Blank

Page

REMONUMENTATION OF CORNERS

CHAINS

The following field notes are those of the remonumentation of certain identified corners selected by the U.S. Forest Service as being located in or controlling the boundaries of Forest Service lands, situated in the Fishlake National Forest. A Forester's Compass was used to determine the bearing of new corner accessories. The mean magnetic declinations were found to be as follows:

T. 20 S., R. 2 W., Salt Lake Meridian,	15° 30' E.
T. 24 S., R. 4½ W., " " "	15° 30' E.
T. 25 S., R. 5 W., " " "	15° 30' E.
T. 26 S., R. 2 W., " " "	15° 25' E.
T. 26 S., R. 5 W., " " "	15° 30' E.
T. 28 S., R. 2 W., " " "	15° 15' E.
T. 29 S., R. 2 W., " " "	15° 15' E.
T. 29 S., R. 2½ W., " " "	15° 15' E.
T. 29 S., R. 4 W., " " "	15° 20' E.
T. 29 S., R. 5 W., " " "	15° 20' E.

The position of each corner was marked by the original monument or determined from corner accessories recorded in the survey record. The monumentation was requested by and accomplished in cooperation with the Forest Service.

T. 20 S., R. 2 W.

Township 20 South, Range 2 West, Salt Lake Meridian, is located partially within the Fishlake National Forest. The boundaries and subdivisional lines were surveyed by Harrey D. Heist and Earl V. Woolley in 1906.

At the cor. of secs. 16, 17, 20 and 21, marked with a sandstone, 24x13x9 ins., firmly set and plainly mkd. with 4 notches on the E. and 3 on S. edges.

from which an original bearing tree:

A cedar, 10 ins. in diam., bears N. 86° W., 20 lks. dist., mkd. T20S R2W S17 BT.

There is no remaining evidence of the other original bearing tree.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground and in a collar of stone to brass cap mkd.

T20S R2W	
S17	S16
S20	S21

1971

Deposit the original stone cor. alongside the iron post.

The cor. is located on gentle E. slope, N. 86° W., 20 lks. dist., from the cor. of 4 strand fence that bears N., S. and E., in scattered cedar growth.

Remonumentation of Corners in T. 20 S., R. 2 W.

CHAINS

At the $\frac{1}{4}$ sec. cor. secs. 16 and 21, marked with a sandstone, 20x12x8 ins., firmly set and plainly mkd. $\frac{1}{4}$ on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground and in a collar of stone to brass cap mkd.

T20S R2W

$\frac{1}{4}$ $\frac{S16}{S21}$

1970

Deposit the original stone cor. alongside the iron post.

The cor. is located on nearly level land, 26 lks. N. of cor. of 3 strand fence that bears N., S., E. and W. In sagebrush growth.

At the $\frac{1}{4}$ sec. cor. of secs. 16 and 17, marked with a sandstone, 15x9x8 ins., firmly set and plainly mkd. $\frac{1}{4}$ on W. face.

from which the original bearing trees:

A cedar, 12 ins. in diam., bears S. 19° E., 54 lks. dist., mkd. $\frac{1}{4}$ S16 BT.

A cedar, 6 ins. in diam., bears S. 53° W., 43 lks. dist., mkd. $\frac{1}{4}$ S17 BT.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 20 ins. in the ground and in a collar of stone to brass cap mkd.

T20S R2W

$\frac{1}{4}$ S17|S16

1970

Deposit the original stone cor. alongside the iron post.

The cor. is located on gentle SE. slope of hill, 3 lks. dist. E. of 3 strand fence that bears N. and S. In thick cedar growth.

T. 24 S., R. 4 $\frac{1}{2}$ W.

Township 24 South, Range 4 $\frac{1}{2}$ West, Salt Lake Meridian, is located within the Fishlake National Forest. The following corners were established by Edward W. Koeber in 1884.

At the $\frac{1}{4}$ sec. cor. of secs. 1 and 36, on the S. bdy. of the Tp., marked with a trachyte stone, 12x10x9 ins. firmly set and plainly mkd. $\frac{1}{4}$ on N. face;

from which the remains of the original bearing trees:

Remonumentation of Corners in T. 25 S., R. 5 W.

CHAINS

An aspen, 10 ins. in diam., bears S. 28° W., 20 lks. dist., mkd. $\frac{1}{4}$ S BT. (record S. 72° E., 24 lks.)

There is no remaining evidence of the other original aspen bearing tree.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 16 ins. in the ground with brass cap mkd.

T24S R4 $\frac{1}{2}$ W

$\frac{1}{4}$ $\frac{S36}{S1}$

T25S R4 $\frac{1}{2}$ W

1970

Deposit the original stone cor. alongside the iron post.

from which

An aspen, 7 ins. in diam., bears N. 3° E., 26 lks. dist., mkd. $\frac{1}{4}$ S36 BT.

Raise a mound of stone, 3 $\frac{1}{2}$ ft. base to brass cap.

The cor. is located on E. slope of ridge, 1 $\frac{1}{2}$ chs. E. of top of ridge that bears N. and S. and 14 lks. N. of a 4 strand fence that bears E. and W. In scattered aspen growth.

At the $\frac{1}{4}$ sec. cor. of secs. 25 and 36, marked with a granite stone, 36x20x10 ins., firmly set and plainly mkd. $\frac{1}{4}$ on N. face.

from which an original bearing tree:

An aspen, 14 ins. in diam., bears S. 8° W., 11 lks. dist., mkd. $\frac{1}{4}$ S BT. (record S. 60° 30' W., 50 lks.)

There is no remaining evidence of the other original aspen bearing tree.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. in diam., 24 ins in the ground and in a collar of stone to brass cap mkd.

T24S R4 $\frac{1}{2}$ W

$\frac{1}{4}$ $\frac{S25}{S36}$

1970

Deposit the original stone cor. alongside the iron post.

The cor. is located on gentle E. slope of hill, at inter section of 4 strand fence that bears E., W. and N. 130 lks. W. of dirt road that bears N. and S.

Remonumentation of Corners in T. 25 S. R. 5 W.

CHAINS

T. 25 S., R. 5 W.

Township 25 South, Range 5 West, Salt Lake Meridian, is located within the Fishlake National Forest. The following corners were established by Hubert D. Page and Harry Erwin in 1900.

At the standard cor. of secs. 33 and 34, on the S. bdy. of the Tp. (Fifth Standard Parallel South) marked with a sandstone; 15x12x8 ins., firmly set and plainly mkd. with 3 notches on the E. and W. edges, S C on N. face:

from which the original bearing trees:

A cedar, 8 ins. in diam., bears N. 69° 30' E., 36 lks. dist., mkd. SC T25S R5W S34 BT.

A cedar, 12 ins. in diam., bears S. 3° 45' E., 63 lks. dist., mkd. SC T26S R5W S BT (record S. 3° 45' E., 52 lks.)

A cedar, 20 ins. in diam., bears S. 73° 15' W., 75 lks. dist., mkd SC T26S R5W S BT. (record S. 73° 15' W., 64 lks.)

A cedar, 15 ins. in diam., bears N. 64° 15' W., 61 lks. dist., mkd. SC T25S R5W S33 BT (record N. 64° 15' W., 52 lks.)

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 16 ins. in the ground with brass cap mkd.

SC
T25S R5W
S33|S34
S9
T26S R5W
1970

Deposit the original stone cor. alongside the iron post.

Raise a mound of stone, 3 ft. base to brass cap.

The cor. is located on gentle E. slope. In thick cedar growth.

At the standard cor. of secs. 31 and 32, on the S. bdy. of the Tp., marked with a limestone, 25x20x3 ins., firmly set and plainly mkd. with 5 notches on the E. and 1 on the W. edge, SC on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins in the ground with brass cap mkd.

S C
T25S R5W
S31|S32
S7
T26S R5W
1970

Remonumentation of Corners in T. 25 S., R. 5 W.

CHAINS

Deposit the original stone cor. alongside the iron post.

Raise a mound of stone, $3\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

The cor. is located on top of wide ridge that bears E. and W. In railed area, no timber.

T. 26 S., R. 2 W.

Township 26 South, Range 2 West, Salt Lake Meridian, is located within the Fishlake National Forest. The following corners were established by John T. Breckon and Homer McCarty in 1897.

At the $\frac{1}{4}$ sec. cor. of secs. 31 and 36, on the E. bdy. of the Tp., marked with a sandstone, 18x10x6 ins., firmly set and plainly mkd. $\frac{1}{4}$ on W. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins. in the ground and in a collar of stone with brass cap mkd.

T26S
R2W R1W
 $\frac{1}{4}$
S36|S31
1970

Deposit the original stone cor. alongside the iron post.

Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

The cor. is located on rolling mountain top, 92 lks. W. of 4 strand fence that bears N. and S. In sagebrush growth; no timber.

At the cor. of secs. 25, 30, 31 and 36, on the E. bdy. of the Tp., marked with a sandstone, 20x16x8 ins., firmly set and plainly mkd. with 5 notches on the N. and 1 on the S. edges.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 20 ins in the ground with brass cap mkd.

T26S
R2W R1W
S25|S30
S36|S31
1970

Deposit the original stone cor. alongside the iron post.

Raise a mound of stone, 4 ft. base, 2 ft. high, W. of cor.

CHAINS

The cor. is located on rolling mountain top. In sagebrush growth; no timber.

At the $\frac{1}{2}$ sec. cor. of secs. 19 and 24, on the E. bdy. of the Tp., marked with a sandstone, 18x12x8 ins., firmly set and plainly mkd. $\frac{1}{2}$ on W. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 12 ins. in the ground with brass cap mkd.

T26S
R2W R1W
 $\frac{1}{2}$
S24 | S19
1970

from which

An aspen, 8 ins. in diam., bears S. 56° E., 30 lks. dist., mkd. $\frac{1}{2}$ S19 BT.

Deposit the original stone cor. alongside the iron post.

Raise a mound of stone, $3\frac{1}{2}$ ft. base to brass cap.

The cor. is located on rolling mountain top. In scattered aspen growth

At the $\frac{1}{2}$ sec. cor. of secs. 1 and 2, marked with a sandstone, 14x12x10 ins., firmly set and plainly mkd. $\frac{1}{2}$ on W. face;

from which an original bearing tree

A spruce, 16 ins. in diam., bears S. 81° 20' W., 35 lks. dist., mkd. $\frac{1}{2}$ S BT.

There is no remaining evidence of the other original aspen bearing tree.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground and in a collar of stone to brass cap mkd.

T26S R2W
 $\frac{1}{2}$
S2 | S1
1970

From which

An aspen, 7 ins. in diam., bears S. 65° E., 53 lks. dist., mkd. $\frac{1}{2}$ S1 BT.

Deposit the original stone cor. alongside the iron post.

CHAINS

The cor. is located on gentle W. slope of hill, 6 lks. E. of 4 strand fence that bears N. and S. In scattered aspen and spruce growth.

At the $\frac{1}{2}$ sec. cor. of secs. 22 and 23, marked with a limestone, 16x10x8 ins., firmly set and plainly mkd. $\frac{1}{2}$ on W. face.

There is no remaining evidence of the original bearing trees.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins. in the ground with brass cap mkd.

T26S R2W

$\frac{1}{2}$
S22 | S23

1970

From which

An aspen, 4 ins. in diam., bears S. 51° E., 29 lks. dist., mkd. T26S R2W $\frac{1}{2}$ S23 BT.

An aspen, 4 ins. in diam., bears S. 71° W., 23 lks. dist., mkd. T26S R2W $\frac{1}{2}$ S22 BT.

Deposit the original stone cor. alongside the iron post.

Raise a mound of stone, $3\frac{1}{2}$ ft. base, to brass cap.

The cor. is located on nearly level land, 2 chs. N. of sagebrush clearing that bears E. and W., and 10 lks. E. of cor. of fence that bears N. and W. In thick aspen and fir growth.

At the cor. of secs. 21, 22, 27 and 28, marked with a trachyte stone, 18x12x8 ins., firmly set and plainly mkd. with 3 notches on the E. and 2 on the S. edges.

There is no remaining evidence of the original bearing trees.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 12 ins. in the ground with brass cap mkd.

T26S R2W

S21 | S22
S28 | S27

1970

Remonumentation of Corners in T. 26 S., R. 2 W.

CHAINS

An aspen, 5 ins. in diam., bears N. 60° E., 27 lks. dist., mkd. T26S R2W S22 BT.

An aspen, 7 ins. in diam., bears S. 73° W., 17 lks. dist., mkd. T26S R2W S28 BT.

An aspen, 5 ins. in diam., bears N. 40° W., 47 lks. dist., mkd. T26S R2W S21 BT.

Deposit the original stone cor. alongside the iron post.

Raise a mound of stone, 3½ ft. base to brass cap.

The cor. is located on gentle NE. slope of hill. In thick aspen and fir growth.

T. 26 S., R. 5 W.

Township 26 South, Range 5 West, Salt Lake Meridian, is located within the Fishlake National Forest. The following corners were established by Hubert D. Page and Harry Erwin in 1900.

At the closing cor. of secs. 9 and 10, on the N. bdy. of the Tp., marked with a trachyte stone, 18x10x8 ins., firmly set and plainly mkd. with 3 notches on the E. and W. edges, C C on S. face:

from which an original bearing tree:

A cedar, 14 ins. in diam., bears S. 12° E., 64 lks. dist., mkd. T26S R5W S10 BT. (record S. 30° W., 65 lks.)

There is no remaining evidence of the other original bearing tree.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground and in a collar of stone to brass cap mkd.

T25S R5W

S34

S9|S10

CC

T26S R5W

1970

Deposit the original stone cor. alongside the iron post.

The cor. is located on gentle NE. slope of hill. In scattered cedar growth.

At the closing cor. of secs. 7 and 8, on the N. bdy. of the Tp., marked with a trachyte stone, 12x8x6 ins., firmly set and plainly mkd. with 5 notches on the E. and 1 on the W. edges, C C on S. face.

Remonumentation of Corners in T. 26 S., R. 5 W.

CHAINS

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins. in the ground with brass cap mkd.

T25S R5W

S32
S7 S8
CC

T26S R5W

1970

Deposit the original stone cor. alongside the iron post.

Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, S. of cor.

The cor. is located on wide ridge that bears E. and W. In railed area, no timber.

T. 28 S., R. 2 W.

Township 28 South, Range 2 West, Salt Lake Meridian, is located partially within the Fishlake National Forest. The following cor. was established by John T. Breckon and Homer McCarty in 1897.

At the cor. of secs. 29, 30, 31 and 32, marked with a granite stone, 18x10x6 ins., firmly set and plainly mkd. with 5 notches on the E. and 1 on the S. edges.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins. in the ground with brass cap mkd.

T28S R2W

S30 S29
S31 S32

1970

Deposit the original stone cor. alongside the iron post.

Raise a mound of stone, 4 ft. base to brass cap.

The cor. is located on steep E. slope of hill, 60 lks. S. of grove of aspens that bears E. and W., and about 8 chs. W. of dirt road that bears N. and S. irregularly. In sagebrush growth.

T. 29 S., R. 2 W.

Township 29 South, Range 2 West, Salt Lake Meridian, is located partially within the Fishlake National Forest. The following corners were established by John T. Breckon and Homer McCarty in 1897.

At the $\frac{1}{4}$ sec. cor. of secs. 29 and 32, marked with a trachyte stone, 16x14x5 ins., firmly set and plainly mkd. $\frac{1}{4}$ on N. face.

At the cor. point

Remonumentation of Corners in T. 29 S. R. 2 W.

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground with brass cap mkd.

T29S R2W

$$\frac{1}{4} \frac{S29}{S32}$$

1970

Deposit the original stone cor. alongside the iron post.

Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

The cor. is located on nearly level sagebrush bench, 213 lks. S. of netwire fence that bears N. and S. and 3 chs. W. of aspen timber line that bears N. and S.

At the $\frac{1}{4}$ sec. cor. of secs. 30 and 31, marked with a trachyte stone, 14x8x4 ins., firmly set and plainly mkd. $\frac{1}{4}$ on N. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground with brass cap mkd.

T29S R2W

$$\frac{1}{4} \frac{S30}{S31}$$

1970

Deposit the original stone cor. alongside the iron post.

Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

The cor. is located on NE. slope of hill, 29 lks. N. of netwire fence that bears E. and W. In scattered scrub aspen growth.

T. 29 S., R. $2\frac{1}{2}$ W.

Township 29 South, Range $2\frac{1}{2}$ West, Salt Lake Meridian, is located partially within the Fishlake National Forest. The following corners were established by John T. Breckon and Homer McCarty in 1897.

At the cor. of secs. 22, 23, 26 and 27, marked with a trachyte stone, 14x12x5 ins., firmly set and plainly mkd. with 2 notches on the E. and S. edges.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground with brass cap mkd.

T29S R2½W

CHAINS

T29S R2½W

S22	S23
S27	S26

1970

Deposit the original stone cor. alongside the iron post.

Raise a mound of stone, 3 ft. base, 1½ ft. high, W. of cor.

The cor. is located on gentle N. slope of hill, approximately 5 chs. S. of fence that bears E. and W. In tall sagebrush growth.

At the cor. of secs. 27, 28, 33 and 34, marked with a sandstone, 16x10x6 ins., firmly set and plainly mkd. with 3 notches on the E. and 1 on the S. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground with brass cap mkd.

T29S R2½W

S28	S27
S33	S34

1970

Deposit the original stone cor. alongside the iron post.

Raise a mound of stone, 4 ft. base, 2 ft. high, W. of cor.

The cor. is located on W. slope of hill, 5 lks. E., and 10 lks. N. of cor. of 4 strand fence that bears N. and E. and about 5 chs. E. of draw, drains S. In sagebrush growth, no timber.

At the cor. of secs. 21, 22, 27 and 28, marked with a trachyte stone, 16x10x5 ins., firmly set and plainly mkd. with 3 notches on the E. and 2 on the S. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground with brass cap mkd.

T29S R2½W

S21	S22
S28	S27

1970

Deposit the original stone cor. alongside the iron post.

Raise a mound of stone, 3 ft. base, 1½ ft. high, W. of cor.

The cor. is located on gentle NW. slope of hill, 39 lks. E. of netwire fence that bears N. and S., approximately 5 chs. S. of dirt road that bears N. 45° E. and S. 45° W. In sagebrush growth

Re monumentation of Corners in T. 29 S., R. 2 $\frac{1}{2}$ W.

CHAINS

At the $\frac{1}{4}$ sec. cor. of secs. 22 and 27, marked with a quartzite stone, 14x12x4 ins., firmly set and plainly mkd. $\frac{1}{4}$ on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 18 ins. in the ground and in a collar of stone to brass cap mkd.

T29S R2 $\frac{1}{2}$ W

$\frac{1}{4}$ $\frac{S22}{S27}$

1970

Deposit the original stone cor. alongside the iron post.

The cor. is located on W. slope of hill, about 8 chs. E. of trail road that bears N. and S. In sagebrush growth.

At the $\frac{1}{4}$ sec. cor. of secs. 21 and 22, marked with a sandstone, 20x14x4 ins., firmly set and plainly mkd. $\frac{1}{4}$ on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T29S R2 $\frac{1}{2}$ W

$\frac{1}{4}$ S21|S22

1970

Deposit the original stone cor. alongside the iron post.

Raise a mound of stone, 3 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.

The cor. is located on NW. slope of hill, 4 lks. E. of netwire fence that bears N. and S. In sagebrush growth.

At the cor. of secs. 15, 16, 21 and 22, marked with a trachyte stone, 18x12x10 ins., firmly set and plainly mkd. with 3 notches on the S. and E. edges:

from which the original bearing trees:

A pinon pine, 12 ins. in diam., bears N. 54° 30' E. 52 lks. dist., mkd. T29S R2 $\frac{1}{2}$ W S15 BT.

A cedar, 8 ins. in diam., bears S. 6° 40' E., 65 lks. dist., mkd. T29S R2 $\frac{1}{2}$ W S22 BT.

A cedar, 8 ins. in diam., bears S. 34° W., 48 lks. dist., mkd. T29S R2 $\frac{1}{2}$ W S21 BT.

CHAINS

A pinon pine, 12 ins. in diam., bears N. 23° 20' W.,
32 lks. dist., mkd. T29S R2 $\frac{1}{2}$ W S16 BT.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. in diam., 10 ins
in the ground with brass cap mkd.

T29S R2 $\frac{1}{2}$ W

$\frac{S16}{S21} | \frac{S15}{S22}$

1970

Deposit the original stone cor. alongside the iron
post.

Raise a mound of stone, 4 ft. base to brass cap.

The cor. is located on steep W. slope of hill, 150 lks.
W. of top of ridge that bears N. 20° E. and S. 20° W.
In thick cedar and pinon growth.

At the $\frac{1}{4}$ sec. cor. of secs. 10 and 15, marked with a
granite stone, 15x10x6 ins., firmly set and plainly mkd.
 $\frac{1}{4}$ on N. face, ~~which~~:

From which the following bearing trees were found:

A pinon pine, 10 ins. in diam., bears N. 62° E.,
15 lks. dist., mkd. $\frac{1}{4}$ S10 BT.

A pinon, 14 ins. in diam., bears S. 7° E.,
40 lks. dist., mkd. $\frac{1}{4}$ S15 BT.

There is no record of any original bearing tree.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. in diam., 14 ins
in the ground with brass cap mkd.

T29S R2 $\frac{1}{2}$ W

$\frac{1}{4} \frac{S10}{S15}$

1970

Deposit the original stone cor. alongside the iron
post.

Raise a mound of stone, 3 ft. base, to brass cap.

The cor. is located on steep W. slope of hill, about 10
chs. E. of trail road that bears N. 45° W. and S. 45° E.
In thick cedar and pinon growth.

T. 29 S., R. 4 W.

Township 29 South, Range 4 West, Salt Lake Meridian, is
located partially within the Fishlake National Forest.
The following corner was established by Hubert D. Page
and Harry Erwin in 1900.

Remonumentation of Corners in T. 29 S., R. 4 W.

CHAINS

At the $\frac{1}{4}$ sec. cor. of secs. 6 and 7, marked with a trachyte stone, 12x10x5 ins., firmly set and plainly mkd. $\frac{1}{4}$ on N. face.

from which an original bearing tree:

A pine, 14 ins. in diam., bears N. 10° W., 18 lks. dist., mkd. $\frac{1}{4}$ S6 BT. (record N. 15° E., 26 lks.)

There is no remaining evidence of the other original bearing tree.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground and in a collar of stone to brass cap mkd

T29S R4W

$\frac{1}{4}$	S6
	S7

1970

Deposit the original stone cor. alongside the iron post.

The cor. is located on gentle N. slope, 50 lks. N. of trail road that bears E. and W. In thick fir and spruce growth.

T. 29 S., R. 5 W.

Township 29 South, Range 5 West, Salt Lake Meridian, is located within the Fishlake National Forest. The following corners were established by Hubert D. Page and Harry Erwin in 1900.

At the cor. of Tps. 28 and 29 S., Rs. 4 and 5 W., marked with a trachyte stone, 24x19x12 ins., firmly set and plainly mkd. with 6 notches on 4 sides.

from which an original bearing tree

An aspen, 14 ins. in diam., bears N. 13° E., 18 lks. dist., mkd. T28S R4W S31 BT. (record, N. 16° E., 19 lks.)

There is no remaining evidence of the other original bearing trees.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 18 ins in the ground and in a collar of stone to brass cap mkd.

T28S	
R5W	R4W
S36	S31
S1	S6

T29S

1970

Re monumentation of Corners in T. 29 S., R. 5 W.

CHAINS

Deposit the original stone cor. alongside the iron post.

From which

An aspen, 12 ins. in diam., bears S. 68° E., 107 lks dist., mkd. T29S R4W S6 BT.

The cor. is located on W. slope of hill, 100 lks. E. of small creek that flows S. and 300 lks. E. of dead end road that bears S. In thick pine and aspen growth.

At the cor. of secs. 1, 2, 35 and 36, on the N. bdy. of the Tp., marked with a trachyte stone, 20x14x10 ins. firmly set and plainly mkd. with 5 notches on the W. and 1 on the E. edges:

from which the original bearing trees

An aspen, 8 ins. in diam., bears N. 5° E., 6 lks. dist., mkd. with dim scribe mks.

An aspen, 7 ins. in diam., bears S. 87° E., 12 lks. dist., mkd. with dim scribe mks. (record S. 75° E., 14 lks.)

An aspen, 8 ins. in diam., bears N. 38° W., 18 lks. dist., mkd. with dim scribe mks. (record N. 31° W., 18 lks.)

There is no remaining evidence of the other original bearing tree.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone to brass cap mkd.

T28S R5W

S35	S36
S2	S1

T29S R5W

1970

From which

An aspen, 7 ins. in diam., bears N. 71° E., 12 lks. dist., mkd. T28S R5W S36 BT.

An aspen, 7 ins. in diam., bears S. 25° E., 5 lks. dist., mkd. T29S R5W S1 BT.

A fir, 14 ins. in diam., bears S. 36° W., 36 lks. dist., mkd. T29S R5W S2 BT.

An aspen, 5 ins. in diam., bears N. 23° W., 21 lks. dist., mkd. T28S R5W S35 BT.

Deposit the original stone cor. alongside the iron post.

Remonumentation of Corners in T. 29 S., R. 5 W.

CHAINS

The cor. is located on S. slope of hill, approximately 4 chs. dist. W. of small clearing that bears N. and S. In thick pine and aspen growth.

At the $\frac{1}{2}$ sec. cor. of secs. 1 and 12, marked with a trachyte stone, 20x12x5 ins., firmly set and plainly mkd. $\frac{1}{2}$ on N. face.

There is no remaining evidence of the original bearing trees.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. in diam., 24 ins in the ground with brass cap mkd.

T29S R5W

$\frac{1}{2}$ $\frac{S1}{S12}$

1970

From which

An aspen, 6 ins. in diam., bears N. 52° E., 20 lks. dist., mkd. $\frac{1}{2}$ S1 BT.

The cor. is located on gentle NW. slope of hill, approximately 6 chs. dist. W. of dirt road that bears N. and S. and 4 chs. dist. E. of Lake Creek that flows S. 45° W. In pine and aspen growth.

At the $\frac{1}{2}$ sec. cor. of secs. 3 and 10, marked with a trachyte stone, 20x11x10 ins., firmly set and plainly mkd. $\frac{1}{2}$ on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. in diam., 18 ins. in the ground and in a collar of stone to brass cap mkd.

T29S R5W

$\frac{1}{2}$ $\frac{S3}{S10}$

1970

From which

An aspen, 7 ins. in diam., bears N. 52° E., 61 lks. dist., mkd. $\frac{1}{2}$ S3 BT.

An aspen, 8 ins. in diam., bears S. 66° W., 68 lks. dist., mkd. $\frac{1}{2}$ S10 BT.

Deposit the original stone cor. alongside the iron post.

The cor. is located on top of ridge that bears N. 75° E. and S. 70° W. In pine and aspen growth.

CERTIFICATE OF SURVEY

(I) ~~We~~. Ferrel D. Reynolds, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 15th day of February, 1961, (I) ~~We~~ have remonumented corners in the following listed townships:

Tps. 20, 26, 28 and 29 S., Rs. 2 W., Salt Lake Meridian
T. 29 S., R. 2 1/2 W., " " "
T. 29 S., R. 4 W., " " "
T. 24 S., R. 4 1/2 W., " " "
Tps. 25, 26 and 29 S., R. 5 W., " " "

of the SALT LAKE Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by (me), ~~us~~ and under (my) ~~our~~ direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

May 19, 1971
(Date)

Ferrel D. Reynolds
(Cadastral Surveyor)

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

SUBMITTED FOR APPROVAL
Date APR 1971

BUREAU OF LAND MANAGEMENT
Washington, D.C.

The foregoing field notes of the remonumentation of corners in:

Tps. 20, 26, 28 and 29 S., R. 2 W., Salt Lake Meridian
T. 29 S., R. 2 1/2 W., " " "
T. 29 S., R. 4 W., " " "
T. 24 S., R. 4 1/2 W., " " "
Tps. 25, 26 and 29 S., R. 5 W., " " "

executed by Ferrel D. Reynolds, Cadastral Surveyor

having been critically examined and found correct, are hereby approved.

(Date)

Bernard W. J. [Signature]
(Chief, Division of Cadastral Survey)

CERTIFICATE OF TRANSCRIPT

I CERTIFY That the foregoing transcript of the field notes of the above described surveys in, is a true copy of the original field notes.

(Date)

(Chief, Division of Cadastral Survey)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT UINTA NATIONAL FOREST
ORIGINAL

FIELD NOTES

OF THE

REMONUMENTATION OF CORNERS

IN

TOWNSHIP 1 SOUTH, RANGE 10 WEST

TOWNSHIP 2 SOUTH, RANGE 10 WEST

TOWNSHIP 2 SOUTH, RANGE 11 WEST

TOWNSHIP 2 SOUTH, RANGE 12 WEST

TOWNSHIP 4 SOUTH, RANGE 11 WEST

OF THE

UINTAH MERIDIAN

TOWNSHIP 5 SOUTH, RANGE 3 EAST

TOWNSHIP 5 SOUTH, RANGE 5 EAST

TOWNSHIP 5 SOUTH, RANGE 6 EAST

TOWNSHIP 6 SOUTH, RANGE 3 EAST

TOWNSHIP 6 SOUTH, RANGE 5 EAST

TOWNSHIP 12 SOUTH, RANGE 2 EAST

TOWNSHIP 12 SOUTH, RANGE 3 EAST

TOWNSHIP 15 SOUTH, RANGE 2 EAST

Of the SALT LAKE Meridian,

In the State of UTAH

EXECUTED BY

Ferrel D. Reynolds Cadastral Surveyor

Under special instructions dated February 15, 1961, which provided for the surveys included under Group Number 447, approved February 16, 1969, and assignment instructions dated June 1, 1970.

Survey commenced July 14, 1970

Survey completed July 31, 1970

INDEX DIAGRAM

Township _____, Range _____

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

29

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

INDEX TO SECTION CORNER MONUMENTS

Tp. 1 S. R. 10 W. Mer. Uintah

6	5	4	3	2	1	
7	8	9	10	11	12	
18	17	16	15	14	13	
19	20	21	22	23	24	
30	29	28	27	26	25	
31	2 ● 1	32	33	34	35	36

Tp. 2 S. R. 10 W. Mer. Uintah

6	2 ●	5	4	3	2	1
7	8	9	10	11	12	
18	17	16	15	14	13	
19	20	21	22	23	24	
30	29	28	27	26	25	
31	32	33	34	35	36	

Tp. 2 S. R. 11 W. Mer. Uintah

6	5	4	3	2	1	
7	8	9	10	11	12	
18	17	16	15	14	13	
19	20	21	22	23	24	
3 ●	30	29	28	27	26	25
31	32	33	34	35	36	

Blank

Page

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

INDEX TO SECTION CORNER MONUMENTS

Tp. 2 S. R. 12 W. Mer. Uintah

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Diagram showing a 6x6 grid of sections. A dot is located at the intersection of the top boundary of section 3 and the right boundary of section 2, with a '4' and an arrow pointing to it. Another dot is located at the intersection of the bottom boundary of section 27 and the right boundary of section 26, with a '4' and an arrow pointing to it. A third dot is located at the intersection of the bottom boundary of section 28 and the right boundary of section 27, with a '4' and an arrow pointing to it.

Tp. 4 S. R. 11 W. Mer. Uintah

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Diagram showing a 6x6 grid of sections. A dot is located at the intersection of the right boundary of section 29 and the bottom boundary of section 28, with a '5' and an arrow pointing to it. Another dot is located at the intersection of the bottom boundary of section 29 and the right boundary of section 28, with a '6' and an arrow pointing to it.

Tp. _____ R. _____ Mer. _____

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Blank

Page

UNITED STATES
 DEPARTMENT OF THE INTERIOR
 BUREAU OF LAND MANAGEMENT

INDEX TO SECTION CORNER MONUMENTS

Tp. 5 S. R. 3 E. MerSalt Lake

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25 6
31	32	33	34	35	36

Tp. 5 S. R. 5 E. MerSalt Lake

6	5	4	3	2	1
7	8	9	10	11	12 7
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33 7	34	35	36 7

Tp. 5 S. R. 6 E. MerSalt Lake

6	5	4	3	2	1
12 7 11	8	9	10	11	12
10 18	17	16	15	14	13
19	20	21	22	23	24
10 30 9	29	28	27	26	25
9 31 8	32	33	34	35	36

Blank

Page

UNITED STATES
 DEPARTMENT OF THE INTERIOR
 BUREAU OF LAND MANAGEMENT

INDEX TO SECTION CORNER MONUMENTS

Tp. 6 S. R. 3 E. MerSalt Lake

12 6	5 13	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	13 26	25
31	32	33	34	35	36

Tp. 6 S. R. 5 E. MerSalt Lake

6	5	15 4	14 3	2	14 1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29 15	28	27	26	25
31	32	33	34	35	36

Tp. 12 S. R. 2 E. MerSalt Lake

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36 16 16

Blank

Page

UNITED STATES
 DEPARTMENT OF THE INTERIOR
 BUREAU OF LAND MANAGEMENT

INDEX TO SECTION CORNER MONUMENTS

Tp. 12 S. R. 3 E. Mer. Salt Lake

6	5	4	3	2	1
7	8	9	10	11	12
18	17	17 ● 16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Tp. 15 S. R. 2 E. Mer. Salt Lake

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33 ● 17	34	35	36

Tp. _____ R. _____ Mer. _____

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Blank

Page

REMONUMENTATION OF CORNERS

CHAINS

The following field notes are those of the remonumentation of certain identified corners selected by the U.S. Forest Service as being located in or controlling the boundaries of Forest Service lands, situated in the Uinta National Forest. A Forester's Compass was used to determine the bearing of new corner accessories. The mean magnetic declinations were found to be as follows:

T. 1 S., R. 10 W.,	Uintah Meridian,	15° 45' E.
T. 2 S., R. 10 W.,	" "	15° 40' E.
T. 2 S., R. 11 W.,	" "	15° 45' E.
T. 2 S., R. 12 W.,	" "	15° 45' E.
T. 4 S., R. 11 W.,	" "	15° 35' E.
T. 5 S., R. 3 E.,	Salt Lake Meridian,	15° 55' E.
T. 5 S., R. 5 E.,	" "	15° 50' E.
T. 5 S., R. 6 E.,	" "	15° 50' E.
T. 6 S., R. 3 E.,	" "	15° 50' E.
T. 6 S., R. 5 E.,	" "	15° 45' E.
T. 12 S., R. 2 E.,	" "	15° 45' E.
T. 12 S., R. 3 E.,	" "	15° 45' E.
T. 15 S., R. 2 E.,	" "	15° 35' E.

The position of each corner was marked by the original monument or determined from corner accessories recorded in the survey record. The monumentation was requested by and accomplished in cooperation with the Forest Service.

T. 1 S., R. 10 W.

Township 1 South, Range 10 West, Uintah Meridian, is located partially within the Uinta National Forest. The following corners were established by Hubert D. Page and Byron S. Kershaw in 1904.

At the cor. of secs. 5, 6, 31 and 32, on the S. bdy. of the Tp., marked with a quartzite stone, 20x12x5 ins., firmly set and plainly mkd. with 5 notches on the E. and 1 on the W. edges;

from which an original bearing tree:

An aspen, 14 ins. in diam., bears S. 44° 30' W., 35 lks. dist., mkd. T2S R10W S6 BT.

There is no remaining evidence of the other aspen bearing trees.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground and in a collar of stone, to brass cap mkd.

T1S R10W

S31 | S32

S6 | S5

T2S R10W

1970

From which

An aspen, 6 ins. in diam., bears N. 15° E., 29 lks. dist., mkd. T1S R10W S32 BT.

CHAINS

Remonumentation of Corners in T. 1 S., R. 10 W.

An aspen, 5 ins. in diam., bears S. 55° E., 48 lks. dist., mkd. T2S R10W S5 BT.

An aspen, 7 ins. in diam., bears N. 87° W., 48 lks. dist., mkd. T1S R10W S31 BT.

Deposit the original stone cor. alongside the iron post.

The cor. is located on gentle NW. slope of hill, approximately 6 chs. dist. S. of trail road that bears SW. and NE., in thick aspen growth.

At the $\frac{1}{4}$ sec. cor. of secs. 31 and 32, marked with a limestone, 18x10x6 ins., firmly set and plainly mkd. $\frac{1}{4}$ on W. face.

There is no remaining evidence of the original aspen bearing trees.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. in diam., 24 ins in the ground, with brass cap mkd.

T1S R10W

$\frac{1}{4}$
S31 | S32
1970

Deposit the original stone cor. alongside the iron post.

Raise a mound of stone, 3 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.

The cor. is located on SW. slope of hill, 3 chs. dist. N. of small creek that flows S. 40° W. and 1 ch. dist. S. of trail road that bears S. 40° W. and N. 40° E., in sagebrush growth.

T. 2 S., R. 10 W.

Township 2 South, Range 10 West, Uintah Meridian, is located partially within the Uinta National Forest. The following cor. was established by Hubert D. Page and Byron S. Kershaw in 1904.

At the $\frac{1}{4}$ sec. cor. of secs. 5 and 6, marked with a quartzite stone, 12x8x6 ins., firmly set and plainly mkd. $\frac{1}{4}$ on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. in diam., 24 ins in the ground, with brass cap mkd.

T2S R10W

$\frac{1}{4}$
S6 | S5
1970

Deposit the original stone cor. alongside the iron post.

Remonumentation of Corners in T. 2 S., R. 10 W.

CHAINS

Raise a mound of stone, 3 ft. base, 1½ ft. high,
W. of cor.

The cor. is located on steep NW. slope of hill, 50 lks.
dist. S. of trail road that bears E. and W. in draw. In
sagebrush growth; no timber.

T. 2 S., R. 11 W.

Township 2 South, Range 11 West, Uintah Meridian, is
located partially within the Uinta National Forest. The
following corners were established by James M. Lentz in
1904.

At the ¼ sec. cor. of secs. 29 and 30, marked with a
sandstone, 18x12x4 ins., firmly set and plainly mkd. ¼
on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins
in the ground, with brass cap mkd.

T2S R11W

¼
S30 | S29
1970

from which

An aspen, 6 ins. in diam., bears S. 34° E., 84 lks.
dist., mkd. T2S R11W ¼ S29 BT.

An aspen, 6 ins. in diam., bears N. 32° W., 47 lks.
dist., mkd. T2S R11W ¼ S30 BT.

Deposit the original stone cor. alongside the iron
post.

Raise a mound of stone, 3 ft. base, 1½ ft. high,
W. of cor.

The cor. is located on gentle SW. slope of hill, 10 lks.
dist. E. of small stream that flows S. and about 4 chs.
dist. N. of creek that flows S. 40° W. In small
clearing surrounded by aspens.

At the ¼ sec. cor. of secs. 19 and 30, marked with a
cobblestone, 16x12x8 ins., firmly set and plainly mkd.
¼ on N. face.

There is no remaining evidence of the 2 original aspen
bearing trees.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins
in the ground, with brass cap mkd.

T2S R11W

¼ S19
S30

1970

from which

CHAINS

Remonumentation of Corners in T. 2 S., R. 11 W.

An aspen, 8 ins. in diam., bears S. 50° W., 16 lks. dist., mkd. T2S R11W ½ S30 BT.

An aspen, 8 ins. in diam., bears N. 4° E., 10 lks. dist., mkd. T2S R11W ½ S19 BT.

Deposit the original stone cor. alongside the iron post.

Raise a mound of stone, 3 ft. base, 1½ ft. high, N. of cor.

The cor. is located on nearly level land, 70 lks. dist. S. of small clearing that bears E. and W. In thick aspen growth.

T. 2 S., R. 12 W.

Township 2 South, Range 12 West, Uintah Meridian, is located partially within the Uinta National Forest. The following corners were established by James M. Lentz in 1904.

At the cor. of secs. 2, 3, 34 and 35, on the N. bdy. of the Tp., marked with a limestone, 16x8x6 ins., firmly set and plainly mkd. with 4 notches on the W. and 2 on the E. edges;

from which the original bearing trees:

An aspen, (dead) 12 ins. in diam., bears S. 89° E., 164 lks. dist., mkd. dimly T2S R12W S2 BT. (record S. 89° E., 170 lks.)

An aspen, (dead) 10 ins. in diam., bears S. 11° W., 97 lks. dist., mkd. T2S R12W S3 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins in the ground, with brass cap mkd.

T1S R12W
S34 S35
S3 S2
T2S R12W
1970

From which

A fir, 12 ins. in diam., bears S. 11° 30' E., 82 lks dist., mkd. T2S R12W S2 BT.

Deposit the original stone cor. alongside the iron post.

Raise a mound of stone, 3 ft. base, 1½ ft. high, W. of cor.

The cor. is located on gentle NW. slope of hill, 47 lks. dist. S. of barbwire fence that bears E. and W. about 4 chs. dist. S. of trail road that bears S. 45° W. and N. 45' E. In aspen and pine growth.

At the cor. of secs. 27, 28, 33 and 34, marked with a cobblestone, 12x11x4 ins., firmly set and plainly mkd.

CHAINS

Remonumentation of Corners in T. 2 S. R. 12 W.
with 3 notches on the E. and 1 on the S. edges;

from which the original bearing trees:

An aspen, 12 ins. in diam., bears S. 42° E., 27 lks.
dist., mkd. T2S R12W S34 BT.

An aspen, 8 ins. in diam., bears S. 57° W., 41 lks.
dist., mkd. T2S R12W S33 BT.

There is no remaining evidence of the other 2 original
aspen bearing trees.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 18 ins.
in the ground, with brass cap mkd.

T2S R12W

S28 | S27

S33 | S34

1970

From which

An aspen, 10 ins. in diam., bears N. 56° E., 34 lks.
dist., mkd. T2S R12W S27 BT.

An aspen, 8 ins. in diam., bears N. 47° W., 38 lks.
dist., mkd. T2S R12W S28 BT.

Deposit the original stone cor. alongside the iron
post.

Raise a mound of stone, 3 ft. base to brass cap.

The cor. is located on E. slope of hill, in fence line
that bears N. and S. In thick aspen growth.

T. 4 S., R. 11 W.

Township 4 South, Range 11 West, Uintah Meridian, is
located partially within the Uinta National Forest. The
following corners were established by Hubert D. Page
and Byron S. Kershaw in 1904.

At the ¼ sec. cor. of secs. 28 and 29, marked with a
sandstone, 15x8x5 ins., firmly set and plainly mkd. ¼
on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins.
in the ground, with brass cap mkd.

T4S R11W

¼
S29 | S28

1970

Deposit the original stone cor. alongside the iron
post.

Raise a mound of stone, 3 ft. base, 1½ ft. high,
W. of cor.

The cor. is located on nearly level sagebrush flat, about

CHAINS

3 chs. dist. N. of trail road that bears S. 45° W. and N. 45° E. No timber.

At the $\frac{1}{4}$ sec. cor. of secs. 29 and 32, marked with a sandstone, 12x8x6 ins., firmly set and plainly mkd. $\frac{1}{4}$ on N. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins in the ground, with brass cap mkd.

T4S R11W

$\frac{1}{4}$ $\frac{S29}{S32}$

1970

Deposit the original stone cor. alongside the iron post.

Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

The cor. is located on nearly level sagebrush flat, 180 lks. dist. W. of trail road that bears N. and S., approximately 8 chs. dist. E. of creek that flows N. 60° E. No timber.

T. 5 S., R. 3 E.

Township 5 South, Range 3 East, Salt Lake Meridian, is located partially within the Uinta National Forest. The following cor. was established by John R. Stewart and Scott P. Stewart in 1900.

At the $\frac{1}{4}$ sec. cor. of secs. 25 and 36, marked with a limestone, 14x8x6 ins., firmly set and plainly mkd. $\frac{1}{4}$ on N. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 18 ins in the ground, with brass cap mkd.

T5S R3E

$\frac{1}{4}$ $\frac{S25}{S36}$

1970

Deposit the original stone cor. alongside the iron post.

Raise a mound of stone, 3 ft. base to brass cap.

The cor. is located on steep S. slope of hill, 1 ch. N. of paved road that bears E. and W. In thick oak brush.

T. 5 S., R. 5 E.

Township 5 South, Range 5 East, Salt Lake Meridian, is located bordering the Uinta National Forest, on the S. and E. bdy. The following corners were established by Andrew P. Hanson in 1909.

Renomination of Corners in T. 5 S. R. 5 E.

CHAINS

At the $\frac{1}{4}$ sec. cor. of sec. 12, on the E. bdy. of the Tp. marked with a sandstone, 14x9x6 ins., firmly set and plainly mkd. $\frac{1}{4}$ on W. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins in the ground, with brass cap mkd.

T5S
R5E R6E
 $\frac{1}{4}$ |
S12 |
1970

Deposit the original stone cor. alongside the iron post.

Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

The cor. is located on gentle S. slope of draw, 125 lks. dist. N. of draw wash that drains E. In sagebrush growth surrounded by aspens.

At the standard cor. of secs. 35 and 36, on the S. bdy. of the Tp., (First Standard Parallel South) marked with a sandstone, 24x15x6 ins., firmly set and plainly mkd. with 5 notches on the W. and 1 on the E. edges S C on N. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins in the ground, with brass cap mkd.

S C
T5S R5E
S35 | S36
S1
T6S R5E
1970

Deposit the original stone cor. alongside the iron post.

Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

The cor. is located on gentle NW. slope, in clearing in draw that drains N. 20° W. 3 lks. dist. N. of netwire fence that bears E. and W. 8 lks. dist. E. of the C C of secs. 1 and 2 in T6S R5E.

At the standard cor. of secs. 32 and 33, on the S. bdy. of the Tp., (First Standard Parallel South) marked with a sandstone, 14x10x8 ins., firmly set and plainly mkd. with 4 notches on the E. and 2 on the W. edge, with S C on N. face.

There is no remaining evidence of the 2 original cottonwood bearing trees.

At the cor. point

Remonumentation of Corners in T. 5 S., R. 5 E.

CHAINS

Set an iron post, 30 ins. long, 2½ ins. in diam., 14 ins. in the ground, with brass cap mkd.

S C
T5S R5E
S32|S33
S4
T6S R5E
1970

Deposit the original stone cor. alongside the iron post.

Raise a mound of stone, 4 ft. base to brass cap.

The cor. is located on steep E. slope of hill, in old fence line that bears E. and W., about 2½ chs. dist. W. of creek, 10 lks. wide, 6 ins. deep, that flows N. In thick oak brush.

T. 5 S., R. 6 E.

Township 5 South, Range 6 East, Salt Lake Meridian, is located within the Uinta National Forest. The following corners were established by Andrew P. Hanson in 1910.

At the standard cor. of Tps. 5 and 6 S., Rs. 5 and 6 E. marked with a sandstone, 20x12x8 ins., firmly set and plainly mkd. with 6 notches on 4 edges, T 5 S SC on N. face, T 6 S on S. face, R 5 E on W. face and R 6 E on E. face.

There is no remaining evidence of the original aspen bearing trees.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 20 ins. in the ground and in a collar of stone to brass cap mkd.

S C
T5S
R5E R6E
S36|S31
S1 | S6
T6S
1970

From which

An aspen, 7 ins. in diam., bears N. 78° E., 43 lks. dist., mkd. T5S R6E S31 BT.

An aspen, 6 ins. in diam., bears S. 36° E., 27 lks. dist., mkd. T6S R6E S6 BT.

An aspen, 8 ins. in diam., bears S. 60° W., 28 lks. dist., mkd. T6S R5E S1 BT.

Deposit the original stone cor. alongside the iron post.

The cor. is located on gentle SE. slope, at the cor. of

CHAINS

Continuation of Section 5 S. R. 6 E

netwire fence that bears N. and W. approximately $6\frac{1}{2}$ chs. dist. W. of small draw that drains S. 10° W. In thick pine and aspen growth.

At the $\frac{1}{2}$ sec. cor. of secs. 31 and 36, on the W. bdy. of the Tp., marked with a sandstone, 20x16x8 ins., (record 18x9x6 ins.,) firmly set and plainly mkd. $\frac{1}{2}$ on W. face; from which:

A pine, 12 ins. in diam., (dead on ground) bears N. $74^\circ 8'$ W., 21 lks. dist., mkd. $\frac{1}{2}$ S36 BT.

There is no remaining evidence of the other original pine bearing tree.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins in the ground with brass cap mkd.

T5S
R5E R6E
 $\frac{1}{2}$
S36 | S31
1970

From which

A pine, 10 ins. in diam., bears S. 28° E., 24 lks. dist., mkd. $\frac{1}{2}$ S31 BT.

A pine, 12 ins. in diam., bears N. 36° W., 23 lks. dist., mkd. $\frac{1}{2}$ S36 BT.

Deposit the original stone cor. alongside the iron post.

Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

The cor. is located on gentle W. slope, on netwire fence line that bears N. and S. and 2 chs. dist. E. of trail road that bears N. and S., in thick pine and aspen growth

At the cor. of secs. 25, 30, 31 and 36, on the W. bdy. of the Tp., marked with a sandstone, 18x8x6 ins., firmly set and plainly mkd. with 5 notches on the N. and 1 on the S. edges; from which:

An aspen, 14 ins. in diam., bears S. $79^\circ 32'$ E., 40 lks. dist., mkd. T5S R6E S31 BT. (record S. $79^\circ 32'$ E., 42 lks.)

An aspen, 12 ins. in diam., bears S. $25^\circ 55'$ W., 30 lks. dist., mkd. T5S R5E S36 BT.

There is no remaining evidence of the other 2 original aspen bearing trees.

At the cor. point

Remonumentation of Corners in T. 5 S., R. 6 E.

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 20 ins in the ground and in a collar of stone to brass cap mkd.

T5S
R5E R6E
S25 | S30
S36 | S31

1970

From which

An aspen, 10 ins. in diam., bears N. 50° E., 43 lks. dist., mkd. T5S R6E S30 BT.

An aspen, 14 ins. in diam., bears N. 60° W., 30 lks. dist., mkd. T5S R5E S25 BT.

Deposit the original stone cor. alongside the iron post.

The cor. is located on NE. slope of hill, 2 lks. dist. W. of 6 strand fence line that bears N. and S. and approximately 8 chs. dist. S. of trail road that bears N. 20° W. and S. 40° E. In thick pine and aspen growth.

At the $\frac{1}{4}$ sec. cor. of sec. 30 on the W. bdy. of the Tp., marked with a sandstone, 28x8x6 ins., firmly set and plainly mkd. $\frac{1}{4}$ on E. face.

There is no remaining evidence of the original aspen bearing tree.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins in the ground with brass cap mkd.

T5S
R5E R6E
 $\frac{1}{4}$
| S30
1970

From which

An aspen, 10 ins. in diam., bears S. 66° E., 48 lks. dist., mkd. T5S R6E $\frac{1}{4}$ S30 BT.

Deposit the original stone cor. alongside the iron post

Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, E. of cor.

The cor. is located on NE. slope of hill, 12 lks. dist. W. of netwire fence that bears N. and S. In thick pine and aspen growth.

At the $\frac{1}{4}$ sec. cor. of sec. 18, on the W. bdy. of the Tp.

Remonumentation of Corners in T. 5 S., R. 6 E.

CHAINS

marked with a sandstone, 18x12x10 ins., firmly set and plainly mkd. $\frac{1}{2}$ on E. face;

from which an original bearing tree:

An aspen, 8 ins. in diam., bears S. 54° E., 5 lks. dist., mkd. $\frac{1}{2}$ S18 BT.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. in diam., 24 ins. in the ground with brass cap mkd.

T5S
R5E R6E
|
 $\frac{1}{2}$
|
S18
1970

From which

An aspen, 10 ins. in diam., bears N. 25° E., 19 lks. dist., mkd. T5S R6E $\frac{1}{2}$ S18 BT.

Deposit the original stone cor. alongside the iron post.

Raise a mound of stone, 3 ft. base, 1 $\frac{1}{2}$ ft. high, E. of cor.

The cor. is located on gentle S. slope, 30 lks. dist. N. of wash in draw that drains E. In thick aspen growth.

At the cor. of secs. 7 and 18, on the W. bdy. of the Tp., marked with a sandstone, 18x9x8 ins., firmly set and plainly mkd. with 4 notches on the S. and 2 on the N. edges.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. in diam., 24 ins. in the ground with brass cap mkd.

T5S
R5E R6E
S12 | $\frac{S7}{S18}$
1970

Deposit the original stone cor. alongside the iron post.

Raise a mound of stone, 3 ft. base, 1 $\frac{1}{2}$ ft. high, E. of cor.

The cor. is located on gentle SE. slope of hill, in 4 strand fence line that bears E. and W., 2 chs. dist. S. of trail road that bears E. and W. In small clearing surrounded by aspens.

Remonumentation of Corners in T. 5 S., R. 6 E.

CHAINS

At the $\frac{1}{2}$ sec. cor. of sec. 7, on the W. bdy. of the Tp., marked with a sandstone, 16x10x8 ins., firmly set and plainly mkd. $\frac{1}{2}$ on E. face; from which:

An aspen, 7 ins. in diam., bears S. 14° E., 20 lks. dist., mkd. $\frac{1}{2}$ S7 BT.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. in diam., 24 ins. in the ground and in a collar of stone to brass cap mkd.

T5S
R5E R6E
|
 $\frac{1}{2}$
| S7
1970

From which

An aspen, 5 ins. in diam., bears N. 64° E., 16 lks. dist., mkd. T5S R6E $\frac{1}{2}$ S7 BT.

Deposit the original stone cor. alongside the iron post.

The cor. is located on top of low ridge that bears E. and W. In thick aspen growth.

T. 6 S., R. 3 E.

Township 6 South, Range 3 East, Salt Lake Meridian, is located partially within the Uinta National Forest. The W. bdy. was surveyed by John R. Stewart and Scott P. Stewart in 1899, the interior lines by Henry Fitzhugh in 1895.

At the $\frac{1}{2}$ sec. cor. of secs. 1 and 6, on the W. bdy. of the Tp., marked with a limestone, 14x8x6 ins. firmly set and plainly mkd. $\frac{1}{2}$ on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. in diam., 24 ins. in the ground with brass cap mkd.

T6S'
R2E R3E
 $\frac{1}{2}$
S1|S6
1970

Deposit the original stone cor. alongside the iron post.

Raise a mound of stone, 3 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.

The cor. is located on gentle E. slope, 60 lks. dist. W. of bottom of draw that drains S., about 3 chs. dist. E. of trail road that bears N. and S. In scrub oak and sagebrush.

Re monumentation of Corners in T. 6 S. R. E.

CHAINS

At the $\frac{1}{4}$ sec. cor. of secs. 26 and 27, marked with a limestone, 24x12x8 ins., firmly set and plainly mkd. $\frac{1}{2}$ on W. face;

from which an original bearing tree:

An aspen, 10 ins. in diam., bears N. 88° E., 14 lks. dist., mkd. $\frac{1}{2}$ (Record, S. 85° E., 10 lks.)

There is no remaining evidence of the other original aspen bearing tree.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. in diam., 20 ins in the ground, with brass cap mkd.

T6S R3E

$\frac{1}{4}$
S27|S26
1970

From which

An aspen, 10 ins. in diam., bears N. 83° W., 57 lks. dist., mkd. $\frac{1}{2}$ S27 BT.

Deposit the original stone cor. alongside the iron post.

Raise a mound of stone, 3 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.

The cor. is located in bottom of draw that drains W. and 70 lks. dist. S. of old trail road that bears E. and W.; in thick oak, aspen and undergrowth.

At the cor. of secs. 5, 6, 7 and 8, marked with a granite stone, 20x18x7 ins., firmly set and plainly mkd. with 5 notches on the S. and E. edges.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. in diam., 18 ins in the ground, with brass cap mkd.

T6S R3E

S6|S5
S7|S8
1970

Deposit the original stone cor. alongside the iron post.

Raise a mound of stone, 3 ft. base to brass cap.

The cor. is located on NW. slope of hill, about 5 chs. dist. E. of trail road that bears N. and S. In thick scrub oak.

Remonumentation of Corners in T. 6 S., R. 5 E.

CHAINS

T. 6 S., R. 5 E.

Township 6 South, Range 5 East, Salt Lake Meridian, is located within the Uinta National Forest. The following corners were established by Andrew P. Hanson in 1910.

At the closing cor. of secs. 1 and 2, on the N. bdy. of the Tp., marked with a sandstone, 18x8x6 ins., firmly set and plainly mkd. with 5 notches on the W. and 1 on the E. edges C C on S. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins in the ground, with brass cap mkd.

T5S R5E

S35

S2 | S1

CC

T6S R5E

1970

Deposit the original stone cor. alongside the iron post.

Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, S. of cor.

The cor. is located on gentle SW. slope, 3 lks. dist. N. of netwire fence that bears E. and W., and 8 lks. dist. W. of the standard cor. of secs. 35 and 36.

At the closing cor. of secs. 3 and 4, on the N. bdy. of the Tp., marked with a quartzite stone, 18x12x8 ins., firmly set and plainly mkd. with 3 notches on the E. and W. edges, CC on S. face.

There is no remaining evidence of the original bearing trees.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins in the ground, with brass cap mkd.

T5S R5E

S33

S4 | S3

CC

T6S R5E

1970

Deposit the original stone cor. alongside the iron post.

Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, S. of cor.

Remonumentation of Corners in T. 6 S. R. 5 E.

CHAINS

The cor. is located in nearly level draw, 150 lks. dist. E. of creek, 30 lks. wide, 1 ft. deep, that flows N. 25° W., 2 chs. dist. W. of canyon road that bears N. 30° W. and S. 30° E. and 4 lks. dist. N. of 4 strand fence that bears E. and W. In thick cottonwood trees and oak brush

At the closing cor. of secs. 4 and 5, on the N. bdy. of the Tp., marked with a sandstone, 18x10x9 ins., firmly set and plainly mkd. with 4 notches on the E. and 2 on the W. edges C C on S. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 12 ins. in the ground with brass cap mkd.

T5S R5E

S32

S5 | S4

C C

T6S R5E

1970

Deposit the original stone cor. alongside the iron post.

Raise a mound of stone, 3 ft. base to brass cap.

The cor. is located on steep E. slope of hill. Approximately 5 chs. dist. W. of creek, 10 lks. wide, 6 ins. deep, that flows N. In old fence line that bears E. and W. In thick scrub oak brush.

At the ¼ sec. cor. of secs. 29 and 32, marked with a sandstone, 17x12x6 ins., firmly set and plainly mkd. ¼ on N. face; from which:

A pine, 20 ins. in diam., bears S. 50° 55' W., 16 lks. dist., mkd. ¼ S32 BT.

A pine, 16 ins. in diam., bears N. 10° 27' W., 45 lks. dist., mkd. ¼ S29 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 18 ins. in the ground with brass cap mkd.

T6S R5E

¼ S29
S32

1970

Deposit the original stone cor. alongside the iron post.

Raise a mound of stone, 3 ft. base to brass cap.

The cor. is located on steep NW. slope of hill, 25 lks. dist. N. of old fence line that bears N. 70° E. and S. 70° W. and about 6½ chs. dist. E. of Hobble Creek that flows S. 30° W. (also trail road that parallels creek) In thick pine growth.

Remonumentation of Corners in T.12 S., R. 2 E.

CHAINS

T. 12 S., R. 2 E.

Township 12 South, Range 2 East, Salt Lake Meridian, is located within the Uinta National Forest. The following cors. were established by J. P. Walker in 1904.

At the $\frac{1}{2}$ sec. cor. of secs. 1 and 36, on the S. bdy. of the Tp., marked with a quartzite stone, 17x8x6 ins., firmly set and plainly mkd. $\frac{1}{2}$ on N. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins in the ground with brass cap mkd.

T12S R2E

$$\frac{1}{2} \frac{S36}{S1}$$
T13S R2E
1970

Deposit the original stone cor. alongside the iron post.

Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

The cor. is located on E. slope of hill, in old fence line that bears E. and W., about 3 chs. dist. E. of trail road that bears N. and S. In thick oak and sagebrush.

At the cor. of secs. 1, 2, 35 and 36, on the S. bdy. of the Tp., marked with a volcanic stone, 18x8x6 ins., firmly set and plainly mkd. with 5 notches on the W. and 1 on the E. edges.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 12 ins in the ground and in a mound of stone, $3\frac{1}{2}$ ft. base to brass cap mkd.

T12S R2E

$$\frac{S35}{S2} \frac{S36}{S1}$$
T13S R2E
1970

Deposit the original stone cor. alongside the iron post.

The cor. is located on NW. slope of hill, in old barb-wire fence line that bears E. and W. In thick oak and sagebrush.

T. 12 S., R. 3 E.

Township 12 South, Range 3 East, Salt Lake Meridian, is located partially within the Uinta National Forest. The following cor. was established by J. P. Walker in 1904.

CHAINS

Blank

Page

CERTIFICATE OF SURVEY

(I) (~~W3~~), Ferrel D. Reynolds, HEREBY

CERTIFY upon honor that, in pursuance of special instructions bearing date of the 15th day of February, 1961, (I) (~~W3~~) have remonumented corners in the following listed townships:

- T. 1 S., R. 10 W., Uintah Meridian
- Tps. 2 S., Rs. 10, 11 and 12 W., Uintah Meridian
- T. 4 S., R. 11 W., Uintah Meridian

- Tps. 5 S., Rs. 3, 5 and 6 E., Salt Lake Meridian
- Tps. 6 S., Rs. 3 and 5 E., " " "
- Tps. 12 S., Rs. 2 and 3 E., " " "
- T. 15 S., R. 2 E., " " "

of the Uintah and Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by (me), (~~me~~) and under (my) (~~our~~) direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

May 19, 1971
(Date)

Ferrel D. Reynolds
(Cadastral Surveyor)

(Date)

(Cadastral Surveyor)

SUBMITTED FOR APPROVAL
Date APR 10 1972

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
Washington, D.C.

The foregoing field notes of the remonumentation of corners in;

- T. 1 S., R. 10 W., Uintah Meridian
- Tps. 2 S., Rs. 10, 11 and 12 W., Uintah Meridian
- T. 4 S., R. 11 W., Uintah Meridian
- Tps. 5 S., Rs. 3, 5 and 6 E., Salt Lake Meridian
- Tps. 6 S., R. 3 and 5 E., " " "
- Tps. 12 S., Rs. 2 and 3 E., " " "
- T. 15 S., R. 2 E., " " "

executed by Ferrel D. Reynolds, Cadastral Surveyor

having been critically examined and found correct, are hereby approved.

(Date)

Bernard W. Fisher
(Chief, Division of Cadastral Survey)

CERTIFICATE OF TRANSCRIPT

~~I CERTIFY That the foregoing transcript of the field notes of the above described surveys in is a true copy of the original field notes.~~

(Date)

(Chief, Division of Cadastral Survey)

UNITED STATES
DEPARTMENT OF THE INTERIOR WASATCH NATIONAL FOREST
BUREAU OF LAND MANAGEMENT

ORIGINAL
FIELD NOTES

OF THE

LAND ACQUISITION RECORDS

IN

TOWNSHIP 3 NORTH RANGE 15 EAST

TOWNSHIP 3 NORTH RANGE 16 EAST

TOWNSHIP 3 NORTH RANGE 17 EAST

Of the SALT LAKE Meridian,

the State of UTAH

EXECUTED BY

Ferrel D. Reynolds

Capital Surveyor

Under special instructions dated February 15, 1961, which provided for the surveys

conducted under Group Number 447 Utah, approved February 16, 1961,

and assignment instructions dated June 23, 1971.

Survey commenced August 9, 1971

Survey completed August 14, 1971

INDEX DIAGRAM

Township _____, Range _____,

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

INDEX TO SECTION CORNER MONUMENTS

Tp. 3 N. R. 15 E. MerSalt Lake

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20 5 5	21 4 4	22 3 3	23	24
30	29	28	27 3 3	26 2	25
31	32	33	34	35 2 1	36

Tp. 3 N. R. 16 E. MerSalt Lake

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23 8	24 6 7
30	29	28 10 10	27 8 9	26 8 7	25
31	32 11	33 9 6	34	35	36

Tp. 3 N. R. 17 E. MerSalt Lake

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19 12	20	21	22	23	24
30 12	29	28	27	26	25
31 11	32	33	34	35	36

Blank

Page

Re monumentation of Corners in T. 3 N., R. 15 E.

CHAINS

The following field notes are those of the remonumentation of certain identified corners selected by the U.S. Forest Service as being located in or controlling the boundaries of Forest Service lands, situated in the Wasatch National Forest. A Forester's Compass was used to determine the bearing of new corner accessories. The mean magnetic declinations were found to be as follows:

T. 3 N., R. 15 E., Salt Lake Meridian, 16° 00' E.
 T. 3 N., R. 16 E., " " " 15° 50' E.
 T. 3 N., R. 17 E., " " " 15° 45' E.

The position of each corner was marked by the original monument or determined from corner accessories recorded in the survey records. The monumentation was requested by and accomplished in cooperation with the Forest Service.

T. 3 N., R. 15 E.

Township 3 North, Range 15 East, Salt Lake Meridian, is located partially within the Wasatch National Forest. The subdivisional lines were surveyed by Adolphe Jessen in 1894 and portions of the South boundary by Augustus D. Ferron in 1878.

At the $\frac{1}{4}$ sec. cor. of secs. 1 and 36, on the S. bdy. of the Tp., marked with a sandstone, 14x8x6 ins., firmly set and plainly mkd. $\frac{1}{4}$ on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. in diam., 24 ins in the ground, with brass cap mkd.

T3N R15E

$\frac{1}{4}$ $\frac{S36}{S1}$

T2N R15E

1971

Deposit the original stone cor. alongside the iron post.

Raise a mound of stone, 3 $\frac{1}{2}$ ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.

The cor. is located on gentle N. slope in scattered pine growth.

At the cor. of secs. 2, 3, 34 and 35, on the S. bdy. of the Tp., marked with a quartzite stone, 14x10x5 ins., firmly set and plainly mkd. with 4 notches on the W. and 2 on E. edges, from which the remains of the original bearing tree:

A red pine, 16 ins. in diam., bears N. 20° E., 38 lks. dist., mkd. S35 T3N R15E BT. (record, N. 20° E., 27 lks. dist.)

At the cor. point

Remonumentation of Corners in T. 3 N., R. 15 E.

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 14 ins. in the ground and in a mound of stone, 3 ft. base to brass cap mkd.

T3N R15E

S34	S35
S3	S2

T2N R15E

1971

Deposit the original stone cor. in mound alongside the iron post.

The cor. is located on steep SE. slope of hill in scattered pine growth.

At the $\frac{1}{4}$ sec. cor. of secs. 34 and 35, marked with a quartzite stone, 14x14x7 ins., firmly set and plainly mkd. $\frac{1}{4}$ on W. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 16 ins in the ground and in a mound of stone, 3 ft. base to brass cap mkd.

T3N R15E

$\frac{1}{4}$	
S34	S35

1971

Deposit the original stone cor. alongside the iron post.

The cor. is located on E. slope of hill, in 6 strand fence line that bears N. and S., about 2 chs. dist. W. of trail road that bears N. and S. In sagebrush; no timber.

At the cor. of secs. 26, 27, 34 and 35, marked with a quartzite stone, 22x10x4 ins., firmly set and plainly mkd. with 2 notches on E. and 1 on S. edges.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 16 ins in the ground and in a mound of stone, 3 ft. base to brass cap mkd.

T3N R15E

S27	S26
S34	S35

1971

Deposit the original stone cor. in mound alongside the iron post.

The cor. is located on gentle N. slope, 4 lks. dist. N. of cor. of 5 strand fence that bears W. and S., in sagebrush; no timber.

Re monumentation of Corners in T. 3 N., R. 15 E.

CHAINS

At the cor. of secs. 27, 28, 33 and 34, marked with a sandstone, 16x12x6 ins., firmly set and plainly mkd. with 3 notches on E. and 1 on S. edge.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 16 ins in the ground and in a mound of stone, 3 ft. base to brass cap mkd.

T3N R15E

S28 | S27

S33 | S34

1971

Deposit the original stone cor. in mound alongside the iron post.

The cor. is located on steep E. slope of hill, 5 lks. dist. N. of cor. of 5 strand fence that bears N. and E., in sagebrush, no timber.

At the ¼ sec. cor. of secs. 27 and 28, marked with a quartzite stone, 18x10x6 ins., firmly set and plainly mkd. ¼ on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 18 ins. in the ground and in a mound of stone, 3 ft. base to brass cap mkd.

T3N R15E

¼
S28 | S27

1971

Deposit the original stone cor. alongside the iron post.

The cor. is located on gentle NE. slope, 1 lks. dist. E. of 6 strand fence line that bears N. and S. In scattered pine and aspen growth.

At the cor. of secs. 21, 22, 27 and 28, marked with a sandstone, 20x12x8 ins., firmly set and plainly mkd. with 3 notches on E. and 2 on S. edges, from which the remains of the original bearing trees:

A pine, 12 ins. in diam., bears N. 38° E., 70 lks. dist., mkd. S22 T3N R15E BT. Record, N. 42° E., 68 lks. dist.

A pine, 14 ins. in diam., bears S. 28° E., 10 lks. dist., mkd. S27 T3N R15E BT. Record, S. 22° E., 10 lks. dist.

A pine, 12 ins. in diam., bears S. 53° W., 15 lks. dist., mkd. S28 T3N R15E BT. Record, S. 64° W., 15 lks. dist.

A pine, 12 ins. in diam., bears N. 31° 15' W., 36 lks. dist., mkd. S21 T3N R15E BT.

Remonumentation of Corners in T. 3 N. R. 15 E.

CHAINS

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 18 ins in the ground and in a mound of stone, 3 ft. base to brass cap mkd.

T3N R15E

S21 | S22

S28 | S27

1971

Deposit the original stone cor. alongside the iron post.

The cor. is located on NE. slope of hill, 4 lks. dist. S. of cor. of 6 strand fence line that bears S. and W. In thick pine growth.

At the $\frac{1}{4}$ sec. cor. of secs. 21 and 28, marked with a quartzite stone, 16x12x6 ins., firmly set and plainly mkd $\frac{1}{4}$ on N. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins in the ground, with brass cap mkd.

T3N R15E

 $\frac{1}{4}$ S21

S28

1971

Deposit the original stone cor. alongside the iron post.

Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

The cor. is located on NW. slope, 2 lks. dist. N. of 6 strand fence line that bears E. and W. In sagebrush, no timber.

At the cor. of secs. 20, 21, 28 and 29, marked with a quartzite stone, 18x14x6 ins., firmly set and plainly mkd. with 4 notches on E. and 2 on S. edge.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 14 ins in the ground and in a mound of stone, 4 ft. base to brass cap mkd.

T3N R15E

S20 | S21

S29 | S28

1971

Deposit the original stone cor. in mound alongside the iron post.

The cor. is located on gentle NE. slope, 150 lks. dist. N. and W. of creek, 20 lks. wide, 8 ins. deep, that flows N. 45° E. and 24 lks. dist. S. of 6 strand fence line that bears E. and W. In scattered pine and aspen

Remanumentation of Corners in T. 3 N. R. 15 E.

CHAINS

growth.

At the $\frac{1}{4}$ sec. cor. of secs. 20 and 29, marked with a limestone, 20x18x4 ins., firmly set and plainly mkd. $\frac{1}{4}$ on N. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins in the ground, with brass cap mkd.

T3N R15E

$\frac{1}{4}$ $\frac{S20}{S29}$

1971

Deposit the original stone cor. alongside the iron post.

Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

The cor. is located on N. slope, in sagebrush, no timber

At the cor. of secs. 19, 20, 29 and 30, marked with a quartzite stone, 16x12x5 ins., firmly set and plainly mkd. with 5 notches on E. and 2 on S. edge, from which the remains of the original bearing trees:

An aspen, 12 ins. in diam., bears N. $13^{\circ} 30'$ E., 17 lks. dist., mkd. S20 T3N R15E BT. Record, N. $23^{\circ} 30'$ E., 17 lks. dist.

A pine, 14 ins. in diam., bears S. 79° W., 5 lks. dist., mkd. S30 T3N R15E BT. Record, S. 39° W., 5 lks. dist.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 20 ins in the ground and in a collar of stone to brass cap mkd.

T3N R15E

$\frac{S19}{S30}$ $\frac{S20}{S29}$

1971

Deposit the original stone cor. alongside the iron post.

From which

An aspen, 6 ins. in diam., bears S. 20° E., 36 lks. dist., mkd. T3N R15E S29 BT.

An aspen, 8 ins. in diam., bears N. 30° W., 39 lks. dist., mkd. T3N R15E S19 BT.

The cor. is located on gentle NE. slope, in thick pine and aspen growth.

CHAINS

Remonumentation of Corners in T. 3 N., R. 16 E.

T. 3 N., R. 16 E.

Township 3 North, Range 16 East, Salt Lake Meridian, is located partially within the Wasatch National Forest. The following corners were established by Adolphe Jessen in 1894.

At the cor. of secs. 19, 24, 25 and 30, on the E. bdy. of The Tp., marked with a quartzite stone, 15x10x8 ins., firmly set and plainly mkd. with 4 notches on N. and 2 on S. edge.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins in the ground, with brass cap mkd.

T3N
R16E R17E
<u>S24</u> <u>S19</u>
S25 S30
1971

Deposit the original stone cor. alongside the iron post.

Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

The cor. is located on gentle NW. slope of hill, 3 lks. dist. S. of cor. of 6 strand fence that bears N., E. and W. In sagebrush, no timber.

At the cor. of secs. 4, 5, 32 and 33, on the S. bdy. of the Tp., marked with a limestone, 16x10x5 ins., firmly set and plainly mkd. with 4 notches on E. and 2 on W. edge.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 16 ins in the ground and in a mound of stone, 3 ft. base to brass cap mkd.

T3N R16E
<u>S32</u> <u>S33</u>
S5 S4
T2N R16E
1971

Deposit the original stone cor. in mound alongside the iron post.

The cor. is located on steep SW. slope of hill, in 6 strand fence line that bears N. and S. and about $2\frac{1}{2}$ chs. dist. N. of draw that drains N. 75° W. In sagebrush, no timber.

At the cor. of secs. 23, 24, 25 and 26, marked with a sandstone, 16x13x3 ins., firmly set and plainly mkd. with 2 notches on S. and 1 on E. edge.

At the cor. point

CHAINS

Remonumen of 1. 3

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 14 ins in the ground and in a mound of stone, 3 ft. base to brass cap mkd.

T3N R16E .

S23	S24
S26	S25

1971

Deposit the original stone cor. alongside the iron post.

The cor. is located on gentle N. slope, 4 lks. dist. N. of 5 strand fence line that bears E. and W. In sagebrush, no timber.

At the $\frac{1}{4}$ sec. cor. of secs. 24 and 25, marked with a limestone, 14x10x6 ins., firmly set and plainly mkd. $\frac{1}{4}$ on N. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 14 ins in the ground and in a mound of stone, 3 ft. base to brass cap mkd.

T3N R16E

$\frac{1}{4}$	S24
	S25

1971

Deposit the original stone cor. in mound alongside the iron post.

The cor. is located on gentle SW. slope of ridge, 4 lks. dist. N. of 5 strand fence line that bears E. and W. In sagebrush, no timber.

At the cor. of secs. 26, 27, 34 and 35, marked with a sandstone, 18x18x9 ins., firmly set and plainly mkd. with 2 notches on E. and 1 on S. edge.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins in the ground, with brass cap mkd.

T3N R16E

S27	S26
S34	S35

1971

Deposit the original stone cor. alongside the iron post.

Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

The cor. is located on grassy N. slope, 2 lks. dist. E. of 5 strand fence line that bears N. and S. about 3 chs. dist. N. of timber line that bears E. and W. and 20 lks. dist. S. of trail road that bears E. and W.

Continuation of Corners in T 3 N., R. 16 E.

CHAINS

At the $\frac{1}{2}$ sec. cor. of secs. 26 and 27, marked with a sandstone, 15x10x9 ins., firmly set and plainly mkd. $\frac{1}{2}$ on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. in diam., 24 ins in the ground, with brass cap mkd.

T3N R16E

$\frac{1}{2}$
S27|S26

1971

Deposit the original stone cor. alongside the iron post.

Raise a mound of stone, 4 ft. base, 2 ft. high, W. of cor.

The cor. is located on gentle N. slope, 1 lk. dist. W. of 5 strand fence line that bears N. and S. In sagebrush, no timber.

At the $\frac{1}{2}$ sec. cor. of secs. 23 and 26, marked with a sandstone, 15x11x5 ins., firmly set and plainly mkd. $\frac{1}{2}$ on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. in diam., 24 ins in the ground, with brass cap mkd.

T3N R16E

$\frac{1}{2}$ S23
S26

1971

Deposit the original stone cor. alongside the iron post.

Raise a mound of stone, 3 ft. base, 1 $\frac{1}{2}$ ft. high, N. of cor.

The cor. is located on grassy NE. slope, 17 lks. dist. N. of 5 strand fence line that bears E. and W. No timber

At the cor. of secs. 27, 28, 33 and 34, marked with a sandstone, 14x12x10 ins., firmly set and plainly mkd. with 3 notches on E. and 1 on S. edge, from which the remains of the original bearing trees;

A pine, 8 ins. in diam., bears N. 40° 30' E., 25 lks. dist., mkd. S27 T3N R16E BT. (record, N. 40° 30' E., 30 lks. dist.)

A pine, 8 ins. in diam., bears S. 41° E., 10 lks. dist., mkd. S34 T3N R16E BT.

A pine, 10 ins. in diam., bears S. 65° W., 33 lks. dist., mkd. S33 T3N R16E BT.

CHAINS

Remonumentation of Corners in T. 3 N. R. 16 E.

A pine, 14 ins. in diam., bears N. 50° 30' W., 35 lks. dist., mkd. S28 T3N R16E BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins in the ground, with brass cap mkd.

T3N R16E

S28 | S27

S33 | S34

1971

Deposit the original stone cor. alongside the iron post.

Raise a mound of stone, 3 ft. base, 1½ ft. high, W. of cor.

The cor. is located on gentle NW. slope, 2 chs. dist. E. of draw that drains N. 35° E. In thick pine growth.

At the ¼ sec. cor. of secs. 27 and 34, marked with a sandstone, 16x8x6 ins., firmly set and plainly mkd. ¼ on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins in the ground, with brass cap mkd.

T3N R16E

¼ S27

S34

1971

Deposit the original stone cor. alongside the iron post.

From which

An aspen, 5 ins. in diam., bears S. 60° E., 26 lks. dist., mkd. T3N R16E S34 BT.

An aspen, 6 ins. in diam., bears N. 21° W., 24 lks. dist., mkd. T3N R16E S27 BT.

Raise a mound of stone, 3 ft. base, 1½ ft. high, N. of cor.

The cor. is located on gentle N. slope, 1 ch. dist. S. of edge of timber line that bears E. and W. In pine and aspen growth.

At the ¼ sec. cor. of secs. 32 and 33, marked with a sandstone, 18x15x3½ ins., firmly set and plainly mkd. ¼ on W. face, from which the remains of the original bearing trees;

A pine, 6 ins. in diam., bears S. 70° E., 17 lks. dist., mkd. ¼ S BT. Record, S. 70° E., 20 lks. dist.

CHAINS

Remonumentation of Corners T3N R16E

A pine, 14 ins. in diam., bears N. 60° 30' W., 8 lks. dist., mkd. $\frac{1}{4}$ S BT.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 16 ins in the ground and in a mound of stone, 3 ft. base to brass cap mkd.

T3N R16E

$\frac{1}{4}$
S32|S33

1971

Deposit the original stone cor. alongside the iron post.

The cor. is located on steep NW. slope of hill, in thick pine growth.

At the cor. of secs. 28, 29, 32 and 33, marked with a sandstone, 20x15x4 ins., firmly set and plainly mkd. with 4 notches on E. and 1 on S. edge.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 16 ins in the ground and in a mound of stone, 4 ft. base to brass cap mkd.

T3N R16E

S29|S28
S32|S33

1971

Deposit the original stone cor. in mound alongside the iron post.

The cor. is located on gentle N. slope, 7 lks. dist. S. of cor. of 4 strand fence that bears N., S. and W. In scattered pine growth.

At the $\frac{1}{4}$ sec. cor. of secs. 28 and 33, marked with a sandstone, 12x8x5 ins., firmly set and plainly mkd. $\frac{1}{4}$ on N. face, from which the remains of the original bearing tree;

A pine, 12 ins. in diam., bears S. 22° E., 17 lks. dist., mkd. $\frac{1}{4}$ S BT. Record, S. 22° E., 22 lks. dist.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins in the ground, with brass cap mkd.

T3N R16E

$\frac{1}{4}$ S28
S33

1971

CHAINS

Remonumentation of Corners in T. 3 N., R. 16 E.

Deposit the original stone cor. alongside the iron post.

Raise a mound of stone, 3 ft. base, 1½ ft. high, N. of cor.

The cor. is located on steep N. slope of hill, in thick pine growth.

At the ¼ sec. cor. of secs. 31 and 32, marked with a sandstone, 22x10x3½ ins., firmly set and plainly mkd. ¼ on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins in the ground, with brass cap mkd.

T3N R16E

¼

S31 | S32

1971

Deposit the original stone cor. alongside the iron post.

Raise a mound of stone, 3 ft. base, 1½ ft. high, W. of cor.

The cor. is located on N. slope of hill, 105 lks. dist. S. of ditch, 8 lks. wide, 8 ins. deep, that flows E. In lightly scattered pine and aspen growth.

T. 3 N., R. 17 E.

Township 3 North, Range 17 East, Salt Lake Meridian, is located partially within the Wasatch National Forest. The following corners were established by Adolphe Jessen in 1894.

At the ¼ sec. cor. of secs. 6 and 31, on the S. bdy. of the Tp., marked with a sandstone, 24x16x10 ins., firmly set and plainly mkd. ¼ on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.

T3N R17E

¼ S31
S6

T2N R17E

1971

Deposit the original stone cor. alongside the iron post.

Raise a mound of stone, 3 ft. base, 1½ ft. high, N. of cor.

The cor. is located on S. slope of hill, 65 lks. dist. W. of mouth of cave in sandstone ledges 50 ft. high, that bears N. 60° W. and S. 60° E. In sagebrush, no

Remonumentation of Corners in T. 3 N., R. 17 E.

CHAINS

timber.

At the $\frac{1}{4}$ sec. cor. of secs. 30 and 31, marked with a sandstone, 17x13x4 ins., firmly set and plainly mkd. $\frac{1}{4}$ on N. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 18 ins in the ground and in a collar of stone to brass cap mkd.

T3N R17E

$\frac{1}{4}$ $\frac{S30}{S31}$

1971

Deposit the original stone cor. alongside the iron post.

The cor. is located on gentle SE. slope in 4 strand fence line that bears N. and S. and 150 lks. dist. S. of trail road that bears N. 80° E. and S. 80° W. In sagebrush, no timber.

At the $\frac{1}{4}$ sec. cor. of secs. 19 and 30, marked with a sandstone, 18x11x $2\frac{1}{2}$ ins., firmly set and plainly mkd. $\frac{1}{4}$ on N. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 16 ins in the ground and in a mound of stone, 3 ft. base to brass cap mkd.

T3N R17E

$\frac{1}{4}$ $\frac{S19}{S30}$

1971

Deposit the original stone cor. in mound alongside the iron post.

The cor. is located on SE. slope of hill, at the cor. of 6 strand fence that bears S. and W. In sagebrush, no timber.

14
CERTIFICATE OF SURVEY

(I) ~~(We)~~ Ferrel D. Reynolds, HEREBY
CERTIFY upon honor that, in pursuance of special instructions bearing date of the 15th day
of February, 1961, (I) ~~(We)~~ have remonumented the corners in the following
listed townships:

Township 3 North, Range 15 East, Salt Lake Meridian
Township 3 North, Range 16 East, " " "
Township 3 North, Range 17 East, " " "

of the Salt Lake Meridian, in the State of Utah, which
are represented in the foregoing field notes as having been executed by (me), ~~(us)~~ and under (my)
~~(our)~~ direction; and that said survey has been made in strict conformity with said special instruc-
tions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in
specific manner described in the foregoing field notes.

March 15, 1972
(Date)

Ferrel D. Reynolds
(Cadastral Surveyor)

(Date)

(Cadastral Surveyor)

SUBMITTED FOR APPROVAL
Date _____

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
Washington, D.C.

The foregoing field notes of the remonumentation of corners in the following
listed townships:

T. 3 N., R. 15 E., Salt Lake Meridian
T. 3 N., R. 16 E., " " "
T. 3 N., R. 17 E., " " "

executed by Ferrel D. Reynolds, Cadastral Surveyor

having been critically examined and found correct, are hereby approved.

(Date)

Bernard W. [Signature]
(Chief, Division of Cadastral Survey)

~~CERTIFICATE OF TRANSCRIPT~~

I CERTIFY That the foregoing transcript of the field notes of the above-described surveys in
is a true copy of the original field notes.

(Chief, Division of Cadastral Survey)

UNITED STATES
DEPARTMENT OF THE INTERIOR UINTA NATIONAL FOREST
BUREAU OF LAND MANAGEMENT

ORIGINAL

FIELD NOTES

OF THE

REMONUMENTATION OF CORNERS

IN

TOWNSHIP 1 SOUTH, RANGE 11 WEST, UINTAH MERIDIAN

TOWNSHIP 2 SOUTH, RANGE 11 WEST, " "

TOWNSHIP 2 SOUTH, RANGE 12 WEST, " "

TOWNSHIP 3 SOUTH, RANGE 10 WEST, " "

TOWNSHIP 3 SOUTH, RANGE 11 WEST, " "

TOWNSHIP 3 SOUTH, RANGE 12 WEST, " "

TOWNSHIP 4 SOUTH, RANGE 10 WEST, " "

TOWNSHIP 4 SOUTH, RANGE 11 WEST, " "

TOWNSHIP 4 SOUTH, RANGE 12 WEST, " "

TOWNSHIP 4 SOUTH, RANGE 6 EAST, SALT LAKE MERIDIAN

Of the SALT LAKE AND UINTAH Meridian,

In the State of UTAH

EXECUTED BY

Ferrel D. Reynolds Cadastral Surveyor

Under special instructions dated February 15, 19 61, which provided for the surveys included under Group Number 447 - Utah, approved February 16, 1961, and assignment instructions dated June 23, 19 71.

Survey commenced July 6, 19 71

Survey completed July 20, 19 71

INDEX DIAGRAM

Township _____, Range _____,

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

INDEX TO SECTION CORNER MONUMENTS

Tp. 1 S. R. 11 W. Mer. Uintah

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

1

Tp. 2 S. R. 11 W. Mer. Uintah

6	5	4	3	2	1
7 2	8	9	10	11	12
18	4 17	16	15	14	13
19	20 3	21	22	23	24
30	29 3	28	27	26	25
31 2	32 2	33	34	35	36

Tp. 2 S. R. 12 W. Mer. Uintah

6	5	4	3	2	5 4 1
7	8	9	10 5	11	12
18	17	16	15	14	13
19	20 6 6	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Blank

Page

INDEX TO SECTION CORNER MONUMENTS

Tp. 3 S. R. 10 W. Mer. Uintah

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
9	30	11	29	28	27
8	11	10	10	26	25
8	31	10	32	33	9
8	9	7	7	34	35
				36	

Tp. 3 S. R. 11 W. Mer. Uintah

6	5	4	3	2	1
14			14		
7	8	9	10	11	12
			14		
18	17	16	15	14	13
19	20	21	22	23	24
				13	
30	29	28	27	26	13
				13	12
31	32	33	34	35	36
					12

Tp. 3 S. R. 12 W. Mer. Uintah

6	5	4	3	2	1
					15
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Blank

Page

INDEX TO SECTION CORNER MONUMENTS

Tp. 4 S. R. 10 W. Mer.Uintah

6 17	5 20	4	3 18	2	1
7 17	8 19	9	10	11	12
16 18	17	16	15	14	13
15 16	19 20	18 21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Tp. 4 S. R. 11 W. Mer.Uintah

6	5	4	3	2	1
7	8 22	9	10	11 23	12 21 21
18	17	16	15	14	13
19	20	21	22	23	21 24 20
30	29	28	27	26	25
31	32	33	34	35	36

Tp. 4 S. R. 12 W. Mer.Uintah

6	5	4	3	2	1 23
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Blank

Page

INDEX TO SECTION CORNER MONUMENTS

Tp. 4 S. R. 6 E. Mer. Salt Lake

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

23

Tp. _____ R. _____ Mer. _____

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Tp. _____ R. _____ Mer. _____

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Blank

Page

REMONUMENTATION OF CORNERS

CHAINS

The following field notes are those of the remonumentation of certain identified corners selected by the U.S. Forest Service as being located in or controlling the boundaries of Forest Service lands, situated in the Uinta National Forest. A Forester's Compass was used to determine the bearing of new corner accessories. The mean magnetic declinations were found to be as follows:

T. 1 S., R. 11 W.,	Uintah Meridian,	15° 50' E.
T. 2 S., R. 11 W.,	" "	15° 45' E.
T. 2 S., R. 12 W.,	" "	15° 50' E.
T. 3 S., R. 10 W.,	" "	15° 40' E.
T. 3 S., R. 11 W.,	" "	15° 45' E.
T. 3 S., R. 12 W.,	" "	15° 45' E.
T. 4 S., R. 10 W.,	" "	15° 40' E.
T. 4 S., R. 11 W.,	" "	15° 40' E.
T. 4 S., R. 12 W.,	" "	15° 45' E.
T. 4 S., R. 6 E.,	Salt Lake Meridian,	16° 00' E.

The position of each corner was marked by the original monument or determined from corner accessories recorded in the survey record. The monumentation was requested by and accomplished in cooperation with the Forest Service.

T. 1 S., R. 11 W.

Township 1 South, Range 11 West, Uintah Meridian, is located within the Uinta National Forest. The following cor. was established by Byron S. Kershaw in 1904.

At the $\frac{1}{2}$ sec. cor. of secs. 31 and 36, on the E. bdy. of the Tp., marked with a cobblestone, 15x10x3 ins., (record, 15x10x10 ins.) firmly set and plainly mkd. $\frac{1}{2}$ on W. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 14 ins in the ground and in a mound of stone, 3 ft. base to brass cap mkd.

T1S
R11W R10W
 $\frac{1}{2}$
S36|S31

1971

Deposit the original stone cor. alongside the iron post.

The cor. is located at N. edge of top of ridge that bears N. 60° W. and S. 60° E. About 4 chs. dist. S. of dirt road that bears N. 60° W. and S. 60° E. and 1 ch. dist. S. of aspen that bears N. 60° W. and S. 60° E.

T. 2 S., R. 11 W.

Township 2 South, Range 11 West, Uintah Meridian, is located partially within the Uinta National Forest. The following cors. were established by James M. Lentz in 1904.

Remonumentation of Corners T. 2 S. R. 11 W.

CHAINS

At the cor. of secs. 5, 6, 31 and 32, on the S. bdy. of the Tp., marked with a cobblestone, 16x11x5 ins., firmly set and plainly mkd. with 5 notches on the E. and 1 on the W. edge.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins in the ground and raise a mound of stone, 3 ft. base, 1½ ft. high, to W. Brass cap mkd.

T2S R11W

S31	S32
S6	S5

T3S R11W

1971

Deposit the original stone cor. alongside the iron post.

The cor. is located on nearly level land, In sage, no timber.

At the ¼ sec. cor. of secs. 6 and 31, on the S. bdy. of the Tp., marked with a cobblestone, 15x8x8 ins., firmly set and plainly mkd. ¼ on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins in the ground and raise a mound of stone, 3 ft. base, 1½ ft. high, to N. Brass cap mkd.

T2S R11W

¼ S31
S6

T3S R11W

1971

Deposit the original stone cor. alongside the iron post.

The cor. is located on nearly level land, in sage, no timber.

At the cor. of secs. 7, 12, 13 and 18, on the W. bdy. of the Tp., marked with the remains of an aspen post, from which the remains of the original bearing trees:

An aspen, 10 ins. in diam., bears N. 53° E., 113 lks. dist., mkd. T2S R11W S7 BT. (record, N. 40° E., 110 lks. dist.)

An aspen, 14 ins. in diam., bears S. 83° W., 83 lks. dist., mkd. T2S R12W S13 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins in the ground and in a collar of stone to brass cap mkd.

CHAINS

T 2 S 11 W

T2S
R12W R11WS12|S7
S13|S18

1971

Deposit the remains of the original aspen post alongside the iron post.

From which

An aspen, 7 ins. in diam., bears S. 44° E., 21 lks. dist., mkd. T2S R11W S18 BT.

An aspen, 8 ins. in diam., bears N. 64° W., 10 lks. dist., mkd. T2S R12W S12 BT.

The cor. is located on NW. slope of hill, At W. end of netwire fence projecting E. In thick aspen growth.

At the cor. of secs. 29, 30, 31 and 32, marked with a cobblestone, 13x12x9 ins., firmly set and plainly mkd. with 5 notches on the E. and 1 on the S. edge, from which the remains of the original bearing tree:

An aspen, 10 ins. in diam., bears S. 26° E., 101 lks. dist., mkd, T2S R11W S32 BT. (record, S. 21° E., 101 lks. dist.)

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins in the ground and raise a mound of stone, 3 ft. base, 1½ ft. high, to W. Brass cap mkd.

T2S R11W

S30|S29
S31|S32

1971

Deposit the original stone cor. alongside the iron post.

From which

An aspen, 5 ins. in diam., bears S. 34° W., 104 lks. dist., mkd. T2S R11W S31 BT.

The cor. is located on S. slope of hill, 2 chs. dist. S. of top of spur projecting W. In aspen growth.

At the ¼ sec. cor. of secs. 20 and 29, marked with a cobblestone, 13x10x7 ins., firmly set and plainly mkd. ¼ on N. face, from which the remains of the original bearing tree:

An aspen, 8 ins. in diam., bears N. 51° 30' E., 28 lks. dist., mkd. ¼ S20 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins in the ground and in a collar of stone to brass cap mkd.

Remonumentation of Corners in T. 2 S., R. 11 W.

CHAINS

T2S R11W

 $\frac{1}{4}$ $\frac{S20}{S29}$

1971

Deposit the original stone cor. alongside the iron post.

From which

An aspen, 10 ins. in diam., bears S. 67° E., 15 lks. dist., mkd. $\frac{1}{4}$ S29 BT.

The cor. is located on W. slope of hill, 2 lks. dist. N. of netwire fence bears E. and W. and about 4½ chs. dist. E. of small lake. In thick aspen growth.

At the $\frac{1}{4}$ sec. cor. of secs. 17 and 18, marked with a decayed aspen post; from which the remains of the original bearing tree:

An aspen, 9 ins. in diam., bears N. 8° W., 71 lks. dist., mkd. $\frac{1}{4}$ S18 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins in the ground, with brass cap mkd.

T2S R11W

 $\frac{1}{4}$ S18|S17

1971

Deposit the remains of the original aspen post alongside the iron post.

From which

An aspen, 5 ins. in diam., bears S. 30° E., 6 lks. dist.; mkd. T2S R11W $\frac{1}{4}$ S17 BT.

The cor. is located on NW. slope of hill, 6 lks. dist. E. of netwire fence that bears N. and S. and 2 chs. dist. S. of draw that drains S. 30° W. In thick aspen growth.

T. 2 S., R. 12 W.

Township 2 South, Range 12 West, Uintah Meridian, is located partially within the Uinta National Forest. The following cors. were established by James M. Lentz in 1904.

At the cor. of secs. 1, 2, 11 and 12, marked with a sandstone, 12x9x6 ins., firmly set and plainly mkd. with 5 notches on the S. and 1 on the E. edge, from which the remains of the original bearing trees:

An aspen, 12 ins. in diam., bears S. 63° W., 25 lks. dist., mkd. T2S R12W S11 BT.

An aspen, 10 ins. in diam., bears N. 42° W., 53 lks. dist., mkd. T2S R12W S2 BT.

CHAINS

Remonumentation of Corners T. 2 S. R. 12 W.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins in the ground with aluminum fence post alongside. Brass cap mkd.

T2S R12W

S2	S1
S11	S12

1971

Deposit the original stone cor. alongside the iron post.

From which

An aspen, 6 ins. in diam., bears N. 21° E., 45 lks. dist., mkd. T2S R12W S1 BT.

An aspen, 5 ins. in diam., bears S. 45° E., 34 lks. dist., mkd. T2S R12W S12 BT.

The cor. is located on N. slope of hill, in thick aspen growth.

At the $\frac{1}{4}$ sec. cor. of secs. 1 and 2, marked with a sandstone, $12 \times 9 \times 3$ ins., firmly set and plainly mkd. $\frac{1}{4}$ on W. face, from which the remains of the original bearing tree;

An aspen, 12 ins. in diam., bears N. 70° E., 8 lks. dist., mkd. $\frac{1}{4}$ S1 BT.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins in the ground with an aluminum fence post alongside. Brass cap mkd.

T2S R12W

$\frac{1}{4}$	S2	S1
---------------	----	----

1971

Deposit the original stone cor. alongside the iron post.

From which

An aspen, 5 ins. in diam., bears N. 76° W., 38 lks. dist., mkd. T2S R12W $\frac{1}{4}$ S2 BT.

The cor. is located on W. slope of hill, about 3 chs. dist. E. of Willow Creek, 10 lks. wide, 6 ins. deep, that flows S. and about 5 chs. dist. E. of trail road that bears N. and S. In thick aspen growth.

At the $\frac{1}{4}$ sec. cor. of secs. 10 and 15, marked with a sandstone, $18 \times 6 \times 4$ ins., firmly set and plainly mkd. $\frac{1}{4}$ on N. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins

Remonumentation of Corners in T. 2 S., R. 12 W.

CHAINS

in the ground with aluminum fence post alongside.
Brass cap mkd.

T2S R12W

$$\frac{1}{4} \frac{S10}{S15}$$

1971

Deposit the original stone cor. alongside the iron post.

The cor. is located on nearly level bottomland, 1 ch. dist. N. of trail road that bears N. 60° W. and S. 60° E. about 7 chs. dist. W. of dirt road that bears N. and S. No timber.

At the $\frac{1}{4}$ sec. cor. of secs. 20 and 21, marked with a sandstone, 13x9x5 ins., firmly set and plainly mkd. $\frac{1}{4}$ on W. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins in the ground and raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, to W. Brass cap mkd.

T2S R12W

$$\frac{1}{4} \frac{S20}{S21}$$

1971

Deposit the original stone cor. alongside the iron post.

The cor. is located on nearly level land. 1 ch. dist. E. of edge of aspens that bears N. and S. In sage.

At the closing cor. of secs. 20 and 21, on the Uintah and Ouray Indian Reservation Bdy., marked with a sandstone, 20x10x7 ins., firmly set and plainly mkd. with 4 notches on the E. and 2 on the W. edge, U I R and C C on S. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins in the ground and raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, to S. Brass cap mkd.

$$\frac{U \ I \ R}{S20 \ | \ S21}$$

C | C

T2S R12W

1971

Deposit the original stone cor. alongside the iron post.

From which

An aspen, 5 ins. in diam., bears S. 54° E., 23 lks. dist., mkd. T2S R12W CC S21 BT.

An aspen, 5 ins. in diam., bears S. 33° W., 23 lks. dist., mkd. T2S R12W CC S20 BT.

CHAINS

Remonumentation of Corners in T. 2 S., R. 12 W.

The cor. is located on rolling land, 150 lks. dist. S. of trail road that bears E. and W., in medium aspen growth.

T. 3 S., R. 10 W.

Township 3 South, Range 10 West, Uintah Meridian, is located partially within the Uinta National Forest. The following corners were established by Hubert D. Page and Byron S. Kershaw in 1904.

At the $\frac{1}{2}$ sec. cor. of secs. 5 and 32, on the S. bdy. of the Tp., marked with a sandstone, 14x10x8 ins., firmly set and plainly mkd. $\frac{1}{2}$ on N. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 20 ins. in the ground and in a collar of stone to brass cap mkd.

T3S R10W

$\frac{1}{2}$ $\frac{S32}{S5}$

T4S R10W
1971

Deposit the original stone cor. alongside the iron post.

The cor. is located on gentle SE. slope of hill, at S. edge of new dirt road that bears E. and W. In sage, no timber.

At the cor. of secs. 5, 6, 31 and 32, on the S. bdy. of the Tp., marked with a sandstone, 18x12x6 ins., firmly set and plainly mkd. with 5 notches on the E. and 1 on the W. edge.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins. in the ground and raise a mound of stone, 3 ft. base $1\frac{1}{2}$ ft. high, to W. Brass cap mkd.

T3S R10W

$\frac{S31}{S6}$ | $\frac{S32}{S5}$

T4S R10W
1971

Deposit the original stone cor. alongside the iron post.

The cor. is located on W. slope of hill. 8 lks. dist. S. of cor. of netwire fence that bears N. 72° W. and S. 48° E. In sage, no timber.

At the $\frac{1}{2}$ sec. cor. of secs. 6 and 31; on the S. bdy. of the Tp., marked with a sandstone, 12x10x4 ins., firmly set and plainly mkd. $\frac{1}{2}$ on N. face.

At the cor. point

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins in the ground with an aluminum fence post alongside, brass cap mkd.

T3N R10W

$\frac{1}{2}$ $\frac{S31}{S6}$

T4S R10W

1971

Deposit the original stone cor. alongside the iron post.

The cor. is located on nearly level sagebrush flat, no timber.

At the cor. of Tps. 3 and 4 S., Rs. 10 and 11 W., marked with a broken sandstone, firmly set and mkd. with 6 notches on 2 remaining sides.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins in the ground and in a collar of stone to brass cap mkd.

T3S

R11W R10W

$\frac{S36}{S1}$ | $\frac{S31}{S6}$

T4S

1971

Deposit the remains of the original stone cor. alongside the iron post.

The cor. is located on gentle E. slope of hill, $1\frac{1}{2}$ lks. dist. W. of netwire fence line that bears N. and S. In sage, no timber.

At the $\frac{1}{4}$ sec. cor. of secs. 31 and 36, on the W. bdy. of the Tp., marked with a sandstone, 14x10x6 ins., firmly set and plainly mkd. $\frac{1}{2}$ on W. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins in the ground and raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, to W. Brass cap mkd.

T3S

R11W R10W

$\frac{1}{2}$
S36 | S31

1971

Deposit the original stone cor. alongside the iron post.

The cor. is located on S. slope of hill, 2 lks. dist. W. of netwire fence line that bears N. and S. and about 5 chs. dist. S. of top of ridge that bears E. and W. In sage, no timber.

Remonumentation of Corners in T. 3 S. R. 10 W.

CHAINS

At the cor. of secs. 25, 30, 31 and 36, on the W. bdy. o the Tp., marked with a cobblestone, 15x6x6 ins., firmly set and plainly mkd. with 5 notches on the N. and 1 on the S. edge.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins in the ground and in a collar of stone, to brass cap mkd.

T3S
R11W R10W

S25|S30
S36|S31

1971

Deposit the original stone cor. alongside the iron post.

The cor. is located on nearly level land, 3 lks. dist. W. of netwire fence line that bears N. and S. In sage, no timber.

At the ¼ sec. cor. of secs. 33 and 34, marked with a sandstone, 15x8x6 ins., firmly set and plainly mkd. ¼ on W. face, from which the remains of the original bearing tree:

An aspen, 12 ins. in diam., bears S. 36° E., 8 lks. dist., mkd. ¼ S34 BT. (record, S. 48° E., 10 lks. dist.)

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins in the ground and in a collar of stone to brass cap mkd.

T3S R10W

¼
S33|S34

1971

Deposit the original stone cor. alongside the iron post.

From which

An aspen, 10 ins. in diam., bears S. 32° W., 15½ lks. dist., mkd. ¼ S33 BT.

The cor. is located on NE. slope of hill, in thick aspen growth.

At the cor. of secs. 20, 21, 28 and 29, marked with a sandstone, 14x8x6 ins., firmly set and plainly mkd. with 4 notches on the E. and 2 on the S. edge.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins in the ground and in a collar of stone to brass cap mkd.

Remonumentation of Corners in T. 3 S. R. 10 W.

CHAINS

T3N R10W

S20	S21
S29	S28

1971

Deposit the original stone cor. alongside the iron post.

The cor. is located on E. slope of hill, 10 lks. dist. W. of netwire fence line that bears N. and S. In thick underbrush and scattered aspen growth.

At the $\frac{1}{4}$ sec. cor. of secs. 31 and 32, marked with a sandstone, 16x8x4 ins., firmly set and plainly mkd. $\frac{1}{4}$ on W. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins in the ground and raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, to W. Brass cap mkd.

T3S R10W

S31	S32
-----	-----

1971

Deposit the original stone cor. alongside the iron post.

The cor. is located on gentle SE. slope of hill, in sage no timber.

At the cor. of secs. 29, 30, 31 and 32, marked with a cobblestone, 14x8x6 ins., firmly set and plainly mkd. with 5 notches on the E. and 1 on the S. edge.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins in the ground and raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, to W. Brass cap mkd.

T3S R10W

S30	S29
S31	S32

1971

Deposit the original stone cor. alongside the iron post.

The cor. is located on nearly level land, about $2\frac{1}{2}$ chs. dist. N. of U.S. Highway No. 40 that bears E. and W. No timber.

At the $\frac{1}{4}$ sec. cor. of secs. 29 and 32, marked with a sandstone, 14x8x6 ins., firmly set and plainly mkd. $\frac{1}{4}$ on N. face.

At the cor. point

CHAINS

Remonumentation of Corners in T. 3 S. R. 11 W.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins in the ground and raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, to N. Brass cap mkd.

T3S R10W

$$\frac{1}{4} \frac{S29}{S32}$$

1971

Deposit the original stone cor. alongside the iron post.

The cor. is located in grassy draw, 3 chs. wide, that drains S. 80° E., no timber.

At the $\frac{1}{4}$ sec. cor. of secs. 29 and 30, marked with a sandstone, $18 \times 10 \times 5$ ins., firmly set and plainly mkd. $\frac{1}{4}$ on W. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins in the ground and raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, to W. Brass cap mkd.

T3S R10W

$$\frac{1}{4} \frac{S29}{S30}$$

1971

Deposit the original stone cor. alongside the iron post.

The cor. is located in grassy draw, 4 chs. wide, that drains W. and 177 lks. dist. N. of 5 strand power line that bears E. and W. No timber.

At the $\frac{1}{4}$ sec. cor. of secs. 20 and 29, marked with a sandstone, $14 \times 10 \times 6$ ins., firmly set and plainly mkd. $\frac{1}{4}$ on N. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins in the ground with aluminum fence post alongside. Brass cap mkd.

T3S R10W

$$\frac{1}{4} \frac{S20}{S29}$$

1971

Deposit the original stone cor. alongside the iron post.

The cor. is located in grassy draw, 3 chs. wide, that drains S. 80° E. No timber.

At the $\frac{1}{4}$ sec. cor. of secs. 30 and 31, marked with a cobblestone, $14 \times 12 \times 4$ ins., firmly set and plainly mkd. $\frac{1}{4}$ on N. face.

Remonumentation of Corners in T. 3 S., R. 10 W.

CHAINS

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins in the ground and raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, to N. Brass cap mkd.

T3S R10W

$$\frac{1}{4} \begin{array}{l} \underline{S30} \\ S31 \end{array}$$

1971

Deposit the original stone cor. alongside the iron post.

The cor. is located 1 ch. W. of top of ridge and trail road that bears N. 60° W. and S. 50° E. No timber.

T. 3 S., R. 11 W.

Township 3 South, Range 11 West, Uintah Meridian, is located partially within the Uinta National Forest. The following corners were established by James M. Lentz, Hubert D. Page and Byron S. Kershaw in 1904.

At the $\frac{1}{4}$ sec. cor. of secs. 1 and 36, on the S. bdy. of the Tp., marked with a sandstone, 20x10x6 ins., firmly set and plainly mkd. $\frac{1}{4}$ on N. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins in the ground and raise a mound of stone, $2\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, to N. Brass cap mkd.

T3S R11W

$$\frac{1}{4} \begin{array}{l} \underline{S36} \\ S1 \end{array}$$

T4S R11W

1971

Deposit the original stone cor. alongside the iron post.

The cor. is located on gentle rolling land. In sage, no timber.

At the cor. of secs. 25, 26, 35 and 36, marked with a sandstone, 16x12x10 in., firmly set and plainly mkd. with 1 notch on the S. and E. edges.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins in the ground and raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, to W. Brass cap mkd.

T3S R11W

$$\begin{array}{l} \underline{S26} \mid \underline{S25} \\ \underline{S35} \mid \underline{S36} \end{array}$$

1971

Deposit the original stone cor. alongside the iron post.

Remonumentation of Corners in T. 3 S., R. 11 W.

CHAINS

The cor. is located on S. slope of hill. About 4 chs. dist. S. of top of ridge and trail road that bears E. and W. In sage, no timber.

At the $\frac{1}{4}$ sec. cor. of secs. 25 and 26, marked with a sandstone, 12x8x4 ins., firmly set and plainly mkd. $\frac{1}{4}$ on W. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins in the ground with aluminum fence post alongside. Brass cap mkd.

T3S R11W

$\frac{1}{4}$
S26 | S25

1971

Deposit the original stone cor. alongside the iron post.

The cor. is located on grassy draw, 2 chs. wide, that drains W. No timber.

At the $\frac{1}{4}$ sec. cor. of secs. 26 and 35, marked with a sandstone, 12x8x2 ins., (record, 16x10x6 ins.) firmly set and plainly mkd. $\frac{1}{4}$ on N. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins in the ground and raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, to N. Brass cap mkd.

T3S R11W

$\frac{1}{4}$ $\frac{S26}{S35}$

1971

Deposit the original stone cor. alongside the iron post.

The cor. is located on NW. slope of hill, about $3\frac{1}{2}$ chs. dist. W. of trail road that bears N. 40° E. and S. 40° W. In sage, no timber.

At the cor. of secs. 22, 23, 26 and 27, marked with a sandstone, 18x10x8 ins., firmly set and plainly mkd. with 2 notches on the S. and E. edges.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins in the ground and raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, to W. Brass cap mkd.

T3S R11W

$\frac{S22}{S27}$ | $\frac{S23}{S26}$

1971

Remonumentation of Corners in T. 3 S., R. 11 W.

CHAINS

Deposit the original stone cor. alongside the iron post.

The cor. is located on top of grassy knoll that bears N. and S. and 5 lks. dist. N. of 4 strand fence line that bears N. 75° W. and S. 75° E. No timber.

At the cor. of secs. 9, 10, 15 and 16, marked with a cobblestone, 12x8x6 ins., firmly set and plainly mkd. wit 4 notches on the S. and 3 on the E. edge.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins in the ground and raise a mound of stone, 3 ft. base, 1½ ft. high, to W. Brass cap mkd.

T3S R11W

S9	S10
S16	S15

1971

Deposit the original stone cor. alongside the iron post.

The cor. is located on nearly level sagebrush flat, no timber.

At the ¼ sec. cor. of secs. 3 and 10, marked with a sandstone, 18x12x6 ins., firmly set and plainly mkd. ¼ on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins in the ground and raise a mound of stone, 3 ft. base, 1½ ft. high, to N. Brass cap mkd.

T3S R11W

¼ S3
¼ S10

1971

Deposit the original stone cor. alongside the iron post.

The cor. is located on gentle S. slope of hill. In sage, no timber.

At the cor. of secs. 5, 6, 7 and 8, marked with a cobblestone, 10x8x6 ins., (record, 18x9x7 ins.) firmly set and plainly mkd. with 5 notches on the S. and E. edge

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. in diam., 24 ins in the ground and in a collar of stone to brass cap mkd.

CHAINS

Remnumentation of Corners in T. 3 S. R. 11 W.

T3S R11W

S6	S5
S7	S8

1971

Deposit the original stone cor. alongside the iron post.

The cor. is located in nearly level bottomland. 30 lks. dist. E. of small creek, 6 lks. wide, 10 ins. deep, that flows S. No timber.

T. 3 S., R. 12 W.

Township 3 South, Range 12 West, Uintah Meridian, is located partially within the Uinta National Forest. The following cor. was established by James M. Lentz in 1904

At the witness $\frac{1}{4}$ sec. cor. of secs. 1 and 12, marked with a cobblestone, 16x7x6 ins., firmly set and plainly mkd. WC $\frac{1}{4}$ on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. in diam., 24 ins in the ground with an aluminum fence post alongside. Brass cap mkd.

T3S R12W

WC $\frac{1}{4}$	S1
	S12

1971

Deposit the original stone cor. alongside the iron post.

The cor. is located in grassy bottomland. 30 lks. dist. E. of edge of swamp, no timber.

T. 4 S., R. 10 W.

Township 4 South, Range 10 West, Uintah Meridian, is located partially within the Uinta National Forest. The following corners were established by Hubert D. Page and Byron S. Kershaw in 1904.

At the cor. of secs. 19, 24, 25 and 30, on the W. bdy. of the Tp., marked with a decayed aspen post, 20 ins. long, 4 ins. square with faint scribe marks, from which the remains of the original bearing trees;

An aspen, 13 ins. in diam., bears N. 79° E., 31 lks. dist., mkd. T4S R10W S19 BT.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. in diam., 24 ins in the ground, with brass cap mkd.

Remonumentation of T. 24 S. 19 E. 1971

CHAINS

T4S
R11W R10W

S24 | S19
S25 | S30

1971

Deposit the remains of the original aspen post alongside the iron post.

From which

An aspen, 8 ins. in diam., bears S. 59° E., 79 lks. dist., mkd. T4S R10W S30 BT.

An aspen, 7 ins. in diam., bears S. 38° W., 29 lks. dist., mkd. T4S R11W S25 BT.

An aspen, 6 ins. in diam., bears N. 38° W., 52 lks. dist., mkd. T4S R11W S24 BT.

From which;

The cor. of netwire fence, bears N. 49° E., 10 lks. dist., fence bears N. and W.

The cor. is located on gentle N. slope, in thick aspen growth.

At the $\frac{1}{2}$ sec. cor. of secs. 19 and 24, on the W. bdy. of the Tp., marked with a sandstone, 16x10x3 ins., firmly set and plainly mkd. $\frac{1}{2}$ on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. in diam., 24 ins. in the ground and raise a mound of stone, 3 ft. base, 1 $\frac{1}{2}$ ft. high, to W. Brass cap mkd.

T4S
R11W R10W

$\frac{1}{2}$
S24 | S19

1971

Deposit the original stone cor. alongside the iron post.

The cor. is located near top of ridge that bears N. 70° E. and S. 70° W. and in netwire fence line that bears N. and S. 15 lks. dist. W. of trail road that bears N. and S. In sagebrush, surrounded by groves of aspens.

At the cor. of secs. 13, 18, 19, and 24, on the W. bdy. of the Tp., marked with a sandstone, 12x10x4 ins., firmly set and plainly mkd. with 3 notches on the N. and S. edges.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. in diam., 24 ins in the ground and in a collar of stone to brass cap mkd.

Remonumentation of Corners in T. 4 S.

CHAINS

T4S
R11W R10W
S13|S18
S24|S19

1971

Deposit the original stone cor. alongside the iron post.

The cor. is located on steep N. slope of hill, 13 lks. dist. W. of netwire fence line that bears N. and S. In sage, surrounded by scrub aspens.

At the cor. of secs. 7, 12, 13 and 18, on the W. bdy. of the Tp., marked by an old mound of stone surrounding a netwire fence cor., which bears N., S. and W.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins in the ground, with brass cap mkd.

T4S
R11W R10W
S12|S7
S13|S18

1971

The cor. is located on gentle NE. slope of hill, 2 chs. dist. S. of hollow that drains E. In sage, no timber.

At the $\frac{1}{2}$ sec. cor. of secs. 7 and 12, on the W. bdy. of the Tp., marked with a sandstone, 15x12x4 ins., firmly set and plainly mkd. $\frac{1}{2}$ on W. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins in the ground and raise a mound of stone, $2\frac{1}{2}$ ft. base, 1 ft. high, to W. Brass cap mkd.

T4S
R11W R10W
 $\frac{1}{2}$
S12|S7

1971

Deposit the original stone cor. alongside the iron post.

The cor. is located on NW. slope of hill, 50 lks. dist. E. of 5 strand fence line that bears N. and S. In sage, no timber.

At the cor. of secs. 1, 6, 7 and 12, on the W. bdy. of the Tp., marked with a sandstone, 20x15x7 ins., firmly set and plainly mkd. with 5 notches on the S. and 1 on the N. edge.

At the cor. point

Remonumentation of Corners in T. 4 S. R. 10 W.

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins in the ground and raise a mound of stone, $2\frac{1}{2}$ ft. base, 1 ft. high, to W. Brass cap mkd.

T4S
R11W R10W

S1	S6
S12	S7

1971

Deposit the original stone cor. alongside the iron post.

The cor. is located in hollow, 3 chs. wide, that drains N. 75° E. and 91 lks. dist. E. of netwire fence line that bears N. and S. In sage, no timber.

At the cor. of secs. 3, 4, 9 and 10, marked with a sandstone, 10x8x6 ins., firmly set and plainly mkd. with 5 notches on the S. and 3 on the E. edge.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins in the ground and in a collar of stone to brass cap mkd.

T4S R10W

S4	S3
S9	S10

1971

Deposit the original stone cor. alongside the iron post.

From which

An aspen, 5 ins. in diam., bears N. 54° E., 32 lks. dist., mkd. T4S R10W S3 BT.

An aspen, 5 ins. in diam., bears S. 60° E., $25\frac{1}{2}$ lks. dist., mkd. T4S R10W S10 BT.

An aspen, 5 ins. in diam., bears S. 24° W., 20 lks. dist., mkd. T4S R10W S9 BT.

An aspen, 5 ins. in diam., bears N. 70° W., 33 lks. dist., mkd. T4S R10W S4 BT.

The cor. is located on SE. slope of hill, in thick aspen growth.

At the cor. of secs. 20, 21, 28 and 29, marked with a sandstone, 18x10x4 ins., firmly set and plainly mkd. with 4 notches on the E. and 2 on the S. edge.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins in the ground and raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, to W. Brass cap mkd.

Remonumentation of Corners in T. 4 S., R. 10 W.

CHAINS

T4S R10W

S20	S21
S29	S28

1971

Deposit the original stone cor. alongside the iron post.

The cor. is located on SE. slope of hill, in sagebrush clearing, with aspens to the N., S. and E.

At the $\frac{1}{4}$ sec. cor. of secs. 20 and 29, marked with a sandstone, 15x12x5 ins., firmly set and plainly mkd. $\frac{1}{4}$ on N. face.

At the cor. point .

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins in the ground and raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, to N. Brass cap mkd.

T4S R10W

$\frac{1}{4}$ S20
S29

1971

Deposit the original stone cor. alongside the iron post.

The cor. is located on steep W. slope of hill, about 2 chs. dist. W. of top of ridge that bears N. and S. in thick underbrush.

At the $\frac{1}{4}$ sec. cor. of secs. 7 and 8, marked with a sandstone, 14x10x6 ins., firmly set and dimly mkd. $\frac{1}{4}$ on W. face.

At the cor. point .

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 16 ins in the ground and in a mound of stone 3 ft. base to brass cap mkd.

T4S R10W

$\frac{1}{4}$
S7 S8

1971

Deposit the original stone cor. alongside the iron post.

The cor. is located on SE. slope of hill, about 8 chs. dist. N. of draw that drains S. 65° E. In sage, no timber.

At the $\frac{1}{4}$ sec. cor. of secs. 7 and 18, marked with a sandstone, 18x10x4 ins., firmly set and plainly mkd. $\frac{1}{4}$ on N. face.

At the cor. point

Remonumentation of Corners in T. 4 S., R. 10 W.

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 10 ins in the ground and in a mound of stone, 4 ft. base to brass cap mkd.

T4S R10W

$$\frac{1}{2} \frac{S7}{S18}$$

1971

Deposit the original stone cor. alongside the iron post.

The cor. is located on broken rocky S. slope of hill, in sagebrush, no timber.

At the $\frac{1}{2}$ sec. cor. of secs. 6 and 7, marked with a sandstone, 18x10x5 ins., firmly set and plainly mkd. $\frac{1}{2}$ on N. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins in the ground and raise a mound of stone, $2\frac{1}{2}$ ft. base, 1 ft. high, to N. Brass cap mkd.

T4S R10W

$$\frac{1}{2} \frac{S6}{S7}$$

1971

Deposit the original stone cor. alongside the iron post.

The cor. is located on gentle NW. slope of hill, in 1 ch. dist. W. of grove of aspens that bears N. and S. In sagebrush growth.

T. 4 S., R. 11 W.,

Township 4 South, Range 11 West, Uintah Meridian, is located partially within the Uinta National Forest. The following corners were established by Hubert D. Page and Byron S. Kershaw in 1904.

At the cor. of secs. 23, 24, 25 and 26, marked with a sandstone, 18x12x6 ins., firmly set and plainly mkd. with 2 notches on the S. and 1 on the E. edge.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 12 ins in the ground and in a mound of stone, 3 ft. base to brass cap mkd.

T4S R11W

$$\frac{S23}{S26} \frac{S24}{S25}$$

1971

Deposit the original stone cor. alongside the iron post.

The cor. is located in sagebrush clearing on steep W.

CHAINS

Remonumentation of Corners T4S R11W

slope of hill.

At the $\frac{1}{4}$ sec. cor. of secs. 23 and 24, marked with a sandstone, 16x14x8 ins., firmly set and plainly mkd. $\frac{1}{4}$ on W. face, from which the remains of the original bearing trees:

An aspen, 6 ins. in diam., bears S. 12° E., 8 $\frac{1}{2}$ lks. dist., mkd. $\frac{1}{4}$ S24 BT. (record, S. 10° E., 6 lks. dist.)

An aspen, 8 ins. in diam., bears S. 38° W., 20 lks. dist., mkd. $\frac{1}{4}$ S23 BT. (record, S. 40° W., 23 lks. dist.)

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. in diam., 24 ins in the ground and raise a mound of stone 2 $\frac{1}{2}$ ft. base, 1 ft. high, to W. Brass cap mkd.

T4S R11W

$\frac{1}{4}$
S23|S24

1971

Deposit the original stone cor. alongside the iron post.

The cor. is located on steep NW. slope of hill, about 3 chs. dist. S. of draw that drains N. 30° E. In thick pine and aspen growth.

At the cor. of secs. 11, 12, 13 and 14, marked with a sandstone, 18x10x7 ins., firmly set and plainly mkd. with 4 notches on the S. and 1 on the E. edge.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. in diam., 24 ins in the ground and raise a mound of stone 2 $\frac{1}{2}$ ft. base, 1 ft. high, to W. Brass cap mkd.

T4S R11W

S11|S12
S14|S13

1971

Deposit the original stone cor. alongside the iron post.

The cor. is located on NW. slope of hill, 4 lks. dist. S. of 5 strand fence line that bears E. and W. In sage, no timber.

At the $\frac{1}{4}$ sec. cor. of secs. 12 and 13, marked with a sandstone, 14x12x8 ins., firmly set and plainly mkd. $\frac{1}{4}$ on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. in diam., 24 ins. in the ground with with an aluminum fence post alongside,

Remonument of Corners in T. 4 S. R. 11 W.

CHAINS

Brass cap mkd.

T4S R11W

$$\frac{1}{2} \begin{array}{l} \underline{S12} \\ S13 \end{array}$$

1971

Deposit the original stone cor. alongside the iron post.

The cor. is located on gentle E. slope, 9 lks. dist. S. of 5 strand fence line that bears E. and W.

At the $\frac{1}{2}$ sec. cor. of secs. 11 and 14, marked with a sandstone, 16x8x6 ins., firmly set and plainly mkd. $\frac{1}{2}$ on N. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins in the ground and raise a mound of stone $2\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, to N. Brass cap mkd.

T4S R11W

$$\frac{1}{2} \begin{array}{l} \underline{S11} \\ S14 \end{array}$$

1971

Deposit the original stone cor. alongside the iron post.

The cor. is located on gentle NW. slope of hill, 2 lks. dist. S. of 5 strand fence line that bears E. and W. In sage, no timber.

At the cor. of secs. 7, 8, 17 and 18, marked with a sandstone, 12x12x4 ins., firmly set and plainly mkd. with 5 notches on the E. and 4 on the S. edge.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins in the ground and raise a mound of stone 3 ft. base, $1\frac{1}{2}$ ft. high, to W. Brass cap mkd.

T4S R11W

$$\begin{array}{l} \underline{S7} \mid \underline{S8} \\ \underline{S18} \mid \underline{S17} \end{array}$$

1971

Deposit the original stone cor. alongside the iron post.

The cor. is located on grassy draw that drains E., 140 lks. dist. N. of creek, 10 lks. wide, 6 ins. deep that flows E. and about 3 chs. dist. S. of dirt road that bears S. 75° E. and N. 75° W. No timber.

CHAINS

Remonumentation of Corner of T. 4 S., R. 12 W.

T. 4 S., R. 12 W.

Township 4 South, Range 12 West, Uintah Meridian, is located within the Uinta National Forest. The following cor. was established by James M. Lentz in 1904.

At the cor. of secs. 1, 2, 11 and 12, marked with a broken sandstone, 14x10x6 ins., firmly set and plainly mkd. with 5 notches on the S. and 1 on the E. edge.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 24 ins in the ground and raise a mound of stone $2\frac{1}{2}$ ft. base, 1 ft. high, to W. Brass cap mkd.

T4S R12W

S2	S1
S11	S12

1971

Deposit the original stone cor. alongside the iron post.

The cor. is located on S. slope of hill, 55 lks. dist. S. of dirt road that bears E. and W. In sage and chokecherry bushes, no timber.

T. 4 S., R. 6 E.

Township 4 South, Range 6 East, Salt Lake Meridian, is bordering the Uinta National Forest. The following cor. was established by Frederick W. Hanson in 1909.

At the $\frac{1}{4}$ sec. cor. of secs. 1 and 36, on the S. bdy. of the Tp., marked with a granite stone, 24x20x10 ins., firmly set and plainly mkd. $\frac{1}{4}$ on N. face, from which the remains of the original bearing tree;

A pine, 26 ins. in diam., bears S. 40° W., 18 lks. dist., mkd. $\frac{1}{4}$ S BT.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. in diam., 14 ins in the ground and in a mound of stone $3\frac{1}{2}$ ft. base to brass cap mkd.

T4S R6E

$\frac{1}{4}$ S36
S1

T5S R6E

1971

Deposit the original stone cor. in mound alongside the iron post.

The cor. is located on steep E. slope, 50 lks. dist. W. of small creek, 5 lks. wide, 3 ins. deep, that flows N. In old netwire fence line that bears E. and W. in scattered pine growth.

CHAINS

Blank

Page

20

CERTIFICATE OF SURVEY

(I) (~~we~~), Ferrel D. Reynolds, HEREBY

CERTIFY upon honor that, in pursuance of special instructions bearing date of the 15th day of February, 1961, (I) (~~we~~) have remonumented the corners in the following listed townships:

- T. 1 S., R. 11 W., Uintah Meridian
- T. 2 S., R. 11 W., " "
- T. 2 S., R. 12 W., " "
- T. 3 S., R. 10 W., " "
- T. 3 S., R. 11 W., " "
- T. 3 S., R. 12 W., " "
- T. 4 S., R. 10 W., " "
- T. 4 S., R. 11 W., " "
- T. 4 S., R. 12 W., " "
- T. 4 S., R. 6 E., Salt Lake Meridian

of the Uintah and Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by (me), (~~us~~) and under (my) (~~our~~) direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

March 15, 1972
(Date)

Ferrel D. Reynolds
(Cadastral Surveyor)

(Date)

(Cadastral Surveyor)

SUBMITTED FOR APPROVAL CERTIFICATE OF APPROVAL
Date APR 10 1972

BUREAU OF LAND MANAGEMENT
Washington, D.C.

The foregoing field notes of the remonumentation of corners in the following listed townships:

- | | |
|------------------------------------|--------------------------------------|
| T. 1 S., R. 11 W., Uintah Meridian | T. 4 S., R. 10 W., Uintah Meridian |
| T. 2 S., R. 11 W., " " | T. 4 S., R. 11 W., " " |
| T. 2 S., R. 12 W., " " | T. 4 S., R. 12 W., " " |
| T. 3 S., R. 10 W., " " | T. 4 S., R. 6 E., Salt Lake Meridian |
| T. 3 S., R. 11 W., " " | |
| T. 3 S., R. 12 W., " " | |

executed by Ferrel D. Reynolds, Cadastral Surveyor

having been critically examined and found correct, are hereby approved.

(Date)

Bernard W. Fisher
(Chief, Division of Cadastral Survey)

CERTIFICATE OF TRANSCRIPT

~~I CERTIFY That the foregoing transcript of the field notes of the above described surveys in _____, is a true copy of the original field notes.~~

(Date)

(Chief, Division of Cadastral Survey)

569

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

ORIGINAL
FIELD NOTES

OF THE
DEPENDENT RESURVEY OF

A PORTION OF THE BOUNDARIES OF SECTIONS 29 AND 30
TOWNSHIP 6 SOUTH, RANGE 21 EAST, SALT LAKE MERIDIAN, UTAH

DEPT. OF INTERIOR
BUR. OF LAND MGMT.

76 APR 5 PM 3 20

RECEIVED
UTAH STATE OFFICE
SALT LAKE CITY, UTAH

Of the Salt Lake Meridian,

the State of Utah

EXECUTED BY

Jerry L. Thomas Supervisory Cadastral Surveyor

Special instructions dated August 16, 1973, approved August 20, 1973,

, which provided for the surveys included under U.S. Survey/Group

number 550, and assignment instructions dated September 12, 1973.

Survey commenced October 4, 1973

Survey completed October 5, 1973

INDEX DIAGRAM

Township 6 South, Range 21 East

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
20	2	28	24	27	26
2					
31	32	33	34	35	36

Township 6 South, Range 21 East, Salt Lake Meridian, Utah

CHAINS

The following field notes are those of the dependent survey of a portion of the boundaries of sections 29 and 30, Township 6 South, Range 21 East, Salt Lake Meridian, Utah.

The north boundary (First Standard Parallel South) and the west boundary (Green River Guide Meridian) were surveyed by A. D. Ferron in 1878. The south 3 miles of the east boundary, the south boundary, sections 19 to 36 of the subdivision, and the meanders of the Green River through the south 1/2 of the township were surveyed by E. Buettner in 1879. The north 3 miles of the east boundary, a portion of the subdivision and the meanders of the Green River through sections 13 and 14 were surveyed, and the north boundary (First Standard Parallel South), the west boundary (Green River Guide Meridian), the south boundary, the south 3 miles of the east boundary, a portion of the subdivision, and the meanders of the Green River through the south 1/2 of the township were resurveyed by D. G. Major in 1882. A portion of the subdivision was surveyed, and the north boundary (First Standard Parallel South), the north 2 miles of the east boundary and a portion of the subdivision were resurveyed by Ralph Gentry in 1920. A partial subdivision of sections 22, 23, 24, 29 and 30 were surveyed, the west boundary (Green River Guide Meridian), the south 4 miles of the east boundary, the south boundary, a portion of the subdivision and the meanders of the Green River were resurveyed by Andrew Nelson in 1953-60.

The survey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1947, and the Special Instructions dated August 16, 1973.

The direction of the lines of this survey was determined by altitude observations on the sun. The lines were carried forward by sustained angulation being supplemented by other altitude observations on the sun taken throughout the progress of the survey. The vertical angles of measurements made on the slope were ascertained by a clinometer in good adjustment; the horizontal equivalents only are entered in the field notes.

In initiating the resurvey, retracements of the previous surveys were performed and a diligent search made to identify evidence of all previously established corner monuments. The lost corners were reestablished by the rules of proportionate measurement.

From the data furnished with the Special Instructions the geographic position of the southeast corner of this survey was determined to be as follows:

Latitude: 40° 15' 44" N. Longitude: 109° 35' 40" W.

The mean magnetic declination is 15° 00' E.

Dependent Resurvey of a Portion of the Subdivision,
T. 6 S., R. 21 E., Salt Lake Meridian, Utah

Reestablishment of the Survey Executed by E. Buettner,
Deputy Surveyor in 1879 and the Resurvey by D. G. Major,

Dependent Resurvey of a Portion of the Subdivision,
T. 6 S., R. 21 E., Salt Lake Meridian, Utah

CHAINS

Deputy Surveyor in 1889 and by Andrew Nelson, Deputy Surveyor in 1953-60.


From the 1/4 sec. cor. of secs. 30 and 31, monumented with an iron post, 2 1/2 ins. diam., protruding 6 ins. above a collar of stone with brass cap mkd. as described in the official record of the 1957 resurvey of the subdivision of T. 6 S., R. 21 E.

N. 89° 56' E., bet. secs. 30 and 31.

Over gentle rolling land, through scattered shadscale and native grass and weeds; along bottom of draw.

- .25 Wash in bottom of draw, drains S.; asc. over W. slope.
- 3.10 Top of narrow gravel spur, projects S. 30° E.; thence through gravel pit.
- 4.01 Point for witness cor. to the meander cor. of secs. 30 and 31, near rim of river bank.

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.



- 4.32 Position for Andrew Nelson's 1957 witness meander cor., falls on steep E. slope and appears to have been destroyed by gravel pit operations.
- 4.52 Present right bank of river, steep rocky bank, bears N. 30° W. and S. 35° E.; true point for meander cor. falls on unsafe place.

Thence across river flowing SE.
- 14.31 The meander cor. of secs. 30 and 31, left bank of Green River, monumented with an iron post, 2 1/2 ins. diam., projecting 6 ins. above mound of stone, with brass cap mkd. as described in the official record of the 1957 resurvey of the subdivision of T. 6 S., R. 21 E.

From the cor. of secs. 19, 20, 29 and 30, monumented with an iron post, 2 1/2 ins. diam., projecting 8 ins. above a mound of stone, with brass cap mkd. as described in the official record of the 1957 resurvey of the subdivision of T. 6 S., R. 21 E.

S. 0° 33' E., bet. secs. 29 and 30.

Over rolling land, through scattered shadscale, native grass and weeds; desc. over rocky S. slope.

- 4.50 Base of descent, bears N. 80° W. and E.; over nearly level bottomland.

Dependent Resurvey of a Portion of the Subdivision.
T. 6 S. R. 21 E. Salt Lake Meridian. T. 6 S.

CHAINS
9.00

Unimproved dirt road, bears E. and W.

12.50

Wash, 5 ft. deep, 50 lks. wide, drains E.

26.72

Point for the meander cor. of secs. 29 and 30, at proportionate distance; there is no remaining evidence of the cor. set by Andrew Nelson in 1957.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T6S R21E
S30|S29



MC
1973

Set a cedar post, projecting 3 ft. above ground, alongside iron post.

29.91

Present right bank of Green River, steep bank, 7 ft. high, bears N. 63° E. and 54° W.

Thence across river flowing SW.

40.01

Point for the ¼ sec. cor. of secs. 29 and 30, at proportionate distance; falls in river.

46.30

The meander cor. of secs. 29 and 30, left bank of Green River, monumented with an iron post, 2½ ins. diam., projecting 6 ins. above ground, with brass cap mkd. as described in the official record of the 1957 resurvey of the subdivision of T. 6 S., R. 21 E.

From the cor. of secs. 19, 20, 29 and 30.

East, bet. secs. 20 and 29.

Over rough broken land, through scattered shadscale, native grass and weeds; asc. along S. slope.

1.00

Top of ascent on bench spur, slopes S. 80° E.; desc. over steep, broken NE. slope.

11.00

Draw, drains SE.; asc. over broken S. slope.

15.00

Top of ascent on S. slope; desc. over SE. slope.

22.00

Bottom of descent, bears N. 70° E. and S. 70° W.; desc. over gentle SE. slope.

27.00

Unimproved dirt road, bears N. 70° E. and S. 70° W.; enter cultivated land.

40.00

Point for the ¼ sec. cor. of secs. 20 and 29, at proportionate distance; there is no remaining evidence of the cor. set by Andrew Nelson in 1957.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T6S R21E

¼ $\frac{S20}{S29}$
1973

Dependent Resurvey of a Portion of the Subdivision,
T. 6 S., R. 21 E., Salt Lake Meridian, Uth

CHAINS

Set a cottonwood post, projecting 4 ft. above ground,
alongside iron post.

50.00

The witness meander cor. of secs. 20 and 29, right bank
of Green River, monumented with an iron post, 2½ ins.
diam., projecting 6 ins. above ground, with brass cap
mkd. as described in the official record of the 1957
resurvey of the subdivision of T. 6 S., R. 21 E.

General Description

Township 6 South, Range 21 East is situated about 12
miles south of Vernal, Utah. In the area surveyed the
elevation varies from 4690 to 4850 feet above sea level.
The soil varies from silt along the river bottom to rocky
loam in the other portion of the area surveyed.

There is some area along the river edge which is
under cultivation and several dirt roads throughout the
township.

An average number of readings throughout the area
resurveyed gives a mean magnetic declination of 15° 00'
E. with no noticeable difference due to local attraction.

CERTIFICATE OF SURVEY

(I) ~~(We)~~, Jerry L. Thomas, Supervisory Cadastral Surveyor, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 16th day of August, 1973, (I) ~~(We)~~ have surveyed a portion of the boundaries of sections 29 and 30, Township 6 South, Range 21 East

of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by (me), ~~(we)~~ and under (my) ~~(our)~~ direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

March 22, 1973
(Date)

Jerry L. Thomas
(Cadastral Surveyor)
Supervisory

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

SUBMITTED FOR APPROVAL
Date FEB 6 1975

BUREAU OF LAND MANAGEMENT
Washington, D.C.

The foregoing field notes of the surveyed portion of the boundaries of Sections 29 and 30, Township 6 South, Range 21 East, Salt Lake Meridian, Utah

executed by Jerry L. Thomas, Supervisory Cadastral Surveyor having been critically examined and found correct, are hereby approved.

MAR 3 1976
(Date)

Jeanne C. Davis
Acting (Chief, Division of Cadastral Survey)

CERTIFICATE OF TRANSCRIPT

I CERTIFY that the foregoing transcript of the field notes of the above described survey, is a true copy of the original field notes.

(Date)

(Date)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

ORIGINAL
FIELD NOTES

OF THE

DEPENDENT RESURVEY

OF THE

SOUTH, EAST AND WEST BOUNDARIES

AND

THE SUBDIVISIONAL LINES

OF

TOWNSHIP 1 SOUTH RANGE 24 EAST

Of the SALT LAKE Meridian,
the State of UTAH

EXECUTED BY

GLEN B. HATCH

SUPERVISORY CADASTRAL SURVEYOR

Under special instructions dated MAY 17, 19 72, approved MAY 18, 1972

, which provided for the surveys included under U.S. Survey/Group
number 540, and assignment instructions dated JUNE 14, 19 72.

Survey commenced JULY 31, 19 72

Survey completed SEPTEMBER 23, 19 72

INDEX DIAGRAM

Township 1 S, Range 24 E

21	6	76	5	61	4	52	3	41	2	31	1	14
	75		74		60		51		40		31	
20	7	73	8	59	9	50	10	39	11	30	12	13
	73		72		59		49		38		29	
19	18	70	17	58	16	48	15	37	14	27	13	12
	70		69		57		47		36		27	
18	19	68	20	56	21	46	22	36	23	26	24	11
	67		66		55		45		35		25	
17	30	65	29	55	28	43	27	34	26	24	25	10
	64		64		54		43		33		23	
16	31	63	32	53	33	42	34	32	35	22	36	9
	7		7		6		5		3		2	

12.59

T. 1 S., R. 24 E., Salt Lake Mer., Utah

CHAINS

The following field notes are those of the dependent resurvey of the south, east and west boundaries and the subdivisional lines of Township 1 South, Range 24 East, Salt Lake Meridan, Utah.

History of prior surveys is as follows:

<u>Survey</u>	<u>Retr. or Resurvey</u>
<u>N. Bdy.</u>	
Salt Lake Base Line)	A. D. Ferron, 1878
All	Fred R. Chappell, 1964
<u>E. Bdy.</u>	
All	A. D. Ferron, 1878
N. 3 miles	A. Jessen, 1898
SE. cor. Tp. remonumented	Chas F. Moore, 1931
<u>S. Bdy</u>	
All	A. D. Ferron, 1878
E. 3 miles	R. Gentry, 1920
<u>W. Bdy.</u>	
All	A. D. Ferron, 1878
W. bdys of secs. 18, 19 and 30	A. D. Ferron, 1908
<u>Subdivisions</u>	
24 secs.	A. D. Ferron, 1879
12 secs.	A. Jessen, 1898
S. Bdy. sec. 12	A. Jessen, 1898

The resurvey was conducted in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1947, and Special Instructions for Group 540, Utah, dated May 17, 1972, and oral instructions from the Chief, Branch of Cadastral Surveys, Utah State Office, in response to my memorandum dated July 13, 1972.

The direction of the lines of this resurvey were determined by reference to true meridians established on line by hour angle observations on Polaris. The lines were carried forward by sustained angulation, being supplemented by other hour angle observations on Polaris and altitude observations on the sun.

Before restoring the corners, the lines of the original survey were retraced and diligent search made for any evidence of the original corner, bearing trees or other calls of the original field note record. Identified corners were remonumented in their original positions. Lost corners were reestablished at proportionate positions, but not until exhausting every reasonable possibility of finding direct evidence for the control of each particular corner.

A letter dated August 18, 1972, was sent to all private land owners in this township by Donald L. Pendleton, Vernal District Manager, Bureau of Land Management, informing them of this resurvey. A meeting with all interested parties was scheduled on August 28, 1972, to review, on the ground, any questions concerning resurvey procedures and/or locations of resurveyed lines.

Distances were determined by a DI-10 electronic measuring device, chaining, traverses or triangulations when required. The details of such triangulations and traverses have been thoroughly verified and in order to simplify the record the diagrams and reductions are

T. 1 S., R. 24 E., Salt Lake Mer., Utah

CHAINS

omitted from these field notes. Distances to topography on lines surveyed, other than by chaining, were scaled from recent reliable U.S.G.S. topographic quadrangles of the area.

The geographic position of the southeast corner of the township is at latitude $40^{\circ} 41' 01''$ N. and longitude $109^{\circ} 09' 37''$ W., as computed from section line ties to U.S.G.S. triangulation station "LANSON", at latitude $40^{\circ} 42' 30.445''$ N. and longitude $109^{\circ} 15' 15.160''$ W., located S. $15^{\circ} 27'$ E., 29.66 chs. distance from the corner of sections 19, 20, 29 and 30, T. 1 S., R. 24 E.

The magnetic declination was taken from $7\frac{1}{2}'$ series, U.S.G.S. quadrangle sheet "Crouse Reservoir", 1967, and "Blair Basin", 1950, and the average, after applying the annual correction, was found to be $15^{\circ} 15'$ East.

Dependent Resurvey of the S. Bdy., T. 1 S., R. 24 E.,
Salt Lake Meridian, Utah

Reestablishment of the Survey Executed by A. D. Ferron, Deputy Surveyor, in 1878, and the Resurvey Executed by Ralph Gentry, Cadastral Engineer, in 1920.

Beginning at the cor. of Tps. 1 S., Rs. 24 and 25 E., which was remonumented in 1931 by Charles F. Moore, in connection with surveys in T. 2 S., R. 25 E., and is an iron post, 3 ins. diam., set on solid sandstone, and in a mound of stone, 5 ft. base, 3 ft. high, with brass cap mkd.

T1S
R24E R25E

S36 | S31
S6

T2S R25E
1931

S. $89^{\circ} 54'$ W., along the S. bdy. of sec. 36.

Over mountainous land through dense mahogany and scattered juniper timber. Desc. along S. slope.

- 2.00 Slope changes, desc. about 140 ft. over SW. slope.
- 5.00 Leave timber, bears NW and SE.
- 12.89 The closing cor. T. 2 S., Rs. 24 and 25 E., monumented with an iron post, 3 ins. diam., extending 4 ins. above mound of stone, 4 ft. base, 2 ft. high, with brass cap mkd.

T1S R24E

S36
S1 | S6

C C
R24E R25E
T2S
1920

Desc. 30 ft. over a SW. slope.

Dependent Resurvey of
S. $\frac{1}{2}$ Sec. of T. 1 S., R. 24 E., Salt Lake Mer., Utah

CHAINS

- 17.90 Draw, drains N. 35° W.; asc. 130 ft. over E. slope.
26.10 Trail road, bears N. 10° E. and S. 10° W.
40.29 The S. $\frac{1}{4}$ sec. cor. of sec. 36, monumented with a limestone, $10 \times 8 \times 6$ ins., firmly set 5 ins. in the ground, and plainly mkd. $\frac{1}{4}$ on N. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T1S R24E

$\frac{1}{4}$ S36

T2S R24E

1972

Bury original cor. stone, alongside iron post.

S. $89^{\circ} 29'$ W., beginning new measurement.

- 1.10 Trail road, bears N. 30° E. and S. 30° W., on spur, slopes N. 30° E.; desc. 35 ft. over NW. slope.
9.65 Draw, drains N.; asc. 20 ft. over NE. slope.
12.52 The N. $\frac{1}{4}$ sec. cor. of sec. 1, T. 2 S., R. 24 E., monumented with an iron post, 1 in. diam., extending 12 ins. above ground, with mound of stone, to S., brass cap mkd.

$\frac{1}{4}$ S1

1920

Asc. 30 ft. over NE. slope.

- 22.25 Spur, slopes N.; desc. 30 ft. over NW. slope.
32.65 Draw, drains N. 35° E.; asc. 25 ft. over SE slope.
40.67 The cor. of secs. 35 and 36, monumented with a quartzite stone, $16 \times 8 \times 5$ ins., firmly set 6 ins. in the ground and plainly mkd. 1 notch on E. and 5 on W. edges.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T1S R24E

|
S35|S36

S1

T2S R24E

1972

Bury original cor. stone alongside iron post.

S. $89^{\circ} 20'$ W., along the S. bdy. of sec. 35.

Over gently rolling desert land through sagebrush undergrowth.

Dependent Resurvey of
S. Bdy. of T. 1 S., R. 24 E., Salt Lake Mer. Utah

CHAINS	
5.75	Trail road, bears N. 10° E. and S. 10° W.
11.90	<p>The cor. of secs. 1 and 2, T. 2 S., R. 24 E., monumented with an iron post, 2 ins. diam., extending 12 ins. above ground, with brass cap mkd.</p> <div style="text-align: center;"> $\frac{S2 \mid S1}{\mid}$ <p>T2S R24E 1920</p> </div>
20.33	<p>Point for the E. 1/16 sec. cor. of sec. 35 only.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.</p> <div style="text-align: center;"> <p>T1S R24E</p> <hr style="width: 50%; margin: 0 auto;"/> <p><u>E1/16 S35</u></p> <p>T2S R24E 1972</p> </div>
40.66	<p>The S. ¼ sec. cor. of sec. 35, monumented with a quartzite stone, 16x10x10 ins., firmly set 6 ins. in the ground, and plainly mkd. ¼ on N. face.</p> <p>At the cor. point</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T1S R24E</p> <hr style="width: 50%; margin: 0 auto;"/> <p><u>¼ S35</u></p> <p>T2S R24E 1972</p> </div> <p>Bury original cor. stone alongside iron post, and raise a mound of stone, 2½ ft. base, 1½ ft. high, N. of cor.</p> <hr style="width: 50%; margin: 20px auto;"/> <p>S. 89° 34' W., beginning new measurement.</p>
11.23	<p>The N. ¼ sec. cor. of sec. 2, T. 2 S., R. 24 E., monumented with an iron post, 1 in. diam., extending 10 ins. above ground, with small mound of stone to S., brass cap mkd.</p> <div style="text-align: center;"> $\frac{\frac{1}{4} S2}{\mid}$ <p>1920</p> </div>
7.00	Improved dirt road, bears N. 60° E. and S. 60° W.
40.65	<p>The cor. of secs. 34 and 35, monumented with a quartzite stone, 12x12x6 ins., firmly set 8 ins. in the ground, mkd. 2 notches on E. and 4 on W. edges.</p> <p>At the cor. point</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>

Dependent Resurvey of
S. Bdy. of T. 1 S., R. 24 E., Salt Lake Mer., Utah

CHAINS

T1S R24E

S34|S35
S2
T2S R24E
1972

Bury original cor. stone alongside iron post.

S. 89° 40' W., along the S. bdy. of sec. 34.

Over gently rolling land through sagebrush undergrowth.

10.48 The cor. of secs. 2 and 3, T. 2 S., R 24 E., monumented with an iron post, 2 ins. diam., extending 12 ins. above ground, and in a collar of stone, with brass cap mkd.

S3|S2
|
T2S R24E
1920

15.10 Improved dirt road, curves N. 10° W. and S. 60° W.; asc. 120 ft. over NE. slope.

23.65 Spur, slopes S. 55° E.; thence along S. slope.

35.00 Head of draw, drains S. 65° E.; asc. 10 ft. over E. slope.

40.72 The S. ¼ sec. cor. of sec. 34, monumented with a limestone, 20x12x8 ins., firmly set 10 ins. in the ground, and plainly mkd. ¼ on the N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T1S R24E

¼ S34
T2S
1972

Place original cor. stone in mound of stone, slongside iron post.

S. 89° 16' W., beginning new measurement.

Asc. 70 ft. over E. slope.

3.60 Trail road, bears N. and S., on spur, slopes S.; desc. 100 ft. over SW. slope.

23.00 Trail road, at base of spur, bears N. 65° W. and S. 65° E.; thence over gently rolling land.

37.65 Trail road, bears N. 20° E. and S. 20° W.

40.30 The cor. of secs. 3, 4, 33 and 34, monumented with a quartzite stone, 12x10x8 ins., firmly set 8 ins. in the ground, and plainly mkd. 3 notches on E. and W. edges.

Dependent Resurvey of
S. Bdy. of T. 1 S., R. 24 E., Salt Lake Mer. Utah

CHAINS

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T1S R24E

$$\frac{S33|S34}{S4|S3}$$

T2S
1972

Bury original cor. stone alongside iron post.

Reestablishment of the Survey Executed by A. D. Ferron,
Deputy Surveyor, in 1878.

S. $89^{\circ} 40'$ W., bet. secs. 4 and 33.

Over gently rolling land through sagebrush undergrowth.

23.55 Trail road, bears N. 30° E. and S. 30° W.40.56 The $\frac{1}{4}$ sec. cor. of secs. 4 and 33, monumented with a quartzite stone, 20x10x6 ins., firmly set 12 ins. in the ground, and plainly mkd. $\frac{1}{4}$ on N. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T1S R24E

$$\frac{S33}{\frac{1}{4} S4}$$

T2S
1972

Bury original cor. stone alongside iron post.

S. $89^{\circ} 37'$ W., beginning new measurement.

3.00 Trail road, bears N. 50° W. and S. 50° E.22.30 Cor. of fences extending N. and S. $89^{\circ} 37'$ W.; thence along fence line.40.52 Point for the cor. of secs. 4, 5, 32 and 33, at cor. of fences, extending N. $89^{\circ} 37'$ E. and N. $2^{\circ} 27'$ E. This position is harmoniously related to existing original corners, and is accepted as the best existing evidence of the position of the original cor.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

Dependent Resurvey of
S. Bdy., T. 1 S., R. 24 E., Salt Lake Mer., Utah

CHAINS

T1S R24E

$\frac{S32|S33}{S5|S4}$

T2S
1972

S. 89° 35' W., bet. secs. 5 and 32.

Over gently rolling land through sagebrush undergrowth.

4.90 Trail road, curves nearly E. and N. 50° W.

25.00 Spur, slopes S.; thence along S. slope.

40.52 The $\frac{1}{4}$ sec. cor. of secs. 5 and 32, monumented with a quartzite stone, 12x8x6 ins., firmly set 5 ins. in the ground, and plainly mkd. $\frac{1}{4}$ on N. face.

At the cor. point.

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, and in a collar of stone with brass cap mkd.

T1S R24E

$\frac{\frac{1}{4} S32}{S5}$

T2S
1972

Bury original cor. stone alongside iron post.

S. 89° 24' W., beginning new measurement.

Along S. slope.

3.20 Spur, slopes S.; desc. 220 ft. over steep SW. slope.

25.00 Draw, drains S.; asc. 100 ft. over SE. slope.

40.22 Point for the cor. of secs. 5, 6, 31 and 32, at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T1S R24E

$\frac{S31|S32}{S6|S5}$

T2S
1972

Raise a mound of stone, 3 ft. base, 2 $\frac{1}{2}$ ft. high W. of cor.

S. 89° 24' W., bet. secs. 6 and 31.

Over mountainous land through sagebrush undergrowth.
Asc. 200 ft. over SE. slope.

Dependent Resurvey of
S. Bdy., T. 1 S., R. 24 E., Salt Lake Mer., Utah

CHAINS	
16.00	Spur, slopes S. 50° W.; desc. 200 ft. over NW. slope.
40.22	The ¼ sec. cor. of secs. 6 and 31, monumented with a limestone, 16x8x3 ins., firmly set 10 ins. in the ground, and plainly mkd. ¼ on N. face.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.
	T1S R24E
	$\frac{S31}{\frac{1}{4} S6}$
	T2S 1972
	Bury original cor. stone alongside iron post.

	S. 89° 32' W., beginning new measurement.
	Desc. 20 ft. over W. slope.
1.50	Draw, drains S.; asc. 160 ft. over E. slope.
14.00	Spur, slopes S.; desc. 50 ft. over W. slope.
20.11	Point for the W. 1/16 sec. cor. of secs. 6 and 31, at proportionate dist.
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T1S R24E
	$W1/16 \frac{S31}{S6}$
	T2S 1972
	Raise a mound of stone, 2½ ft. base, 1½ ft. high, N. of cor.
	Desc. 160 ft. over W. slope.
27.15	Trail road, bears N. and S.
27.85	Draw, drains irregularly S.; asc. 80 ft. over E. slope.
37.11	The cor. of Tps. 1 and 2 S., Rs. 23 and 24 E., monumented with a quartzite stone, 18x12x8 ins., firmly set 10 ins. in the ground, and mkd. 3 notches on N., 6 notches on E., S. and W. edges.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 26 ins. in the ground, and in a collar of stone, with brass cap mkd.

Dependent Resurvey of
S. Bdy., T. 1 S., R. 24 E., Salt Lake Mer., Utah

CHAINS

T1S
R23E R24E

S36|S31
S1|S6

T2S
1972

Bury original cor. stone alongside iron post.

Dependent Resurvey of
E. Bdy., T. 1 S., R. 24 E., Salt Lake Mer., Utah.

Reestablishment of the Survey Executed by A. D. Ferron,
Deputy Surveyor, in 1878.

From the cor. of Tps. 1 S., Rs. 24 and 25 E., hereinbefore
described.

N. 0° 43' W., bet. secs. 31 and 36.

Over mountainous land through dense mahogany and juniper
timber. Asc. 120 ft. over SE. slope.

7.50 Spur, slopes S. 50° W.; thence by triangulation, desc.
about 250 ft. over steep NW. slope.

11.00 Timber becomes scattered, enter sagebrush undergrowth.

26.00 Base of steep decent, bears NE. and SW.; desc. about
30 ft. over gentle NW. slope.

36.10 Trail road, bears N. 25° E. and S. 25° W. End triangu-
lation.

40.46 The $\frac{1}{4}$ sec. cor. of secs. 31 and 36, monumented with a
quartzite stone, 22x12x10 ins., firmly set 10 ins. in
the ground, and plainly mkd. $\frac{1}{4}$ on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins.
in the ground with brass cap mkd.

T1S
R24E R25E
 $\frac{1}{4}$
S36|S31
1972

Bury original cor. stone alongside iron post, and raise
a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor.

N. 0° 25' W., beginning new measurement.

Over rolling land through sagebrush undergrowth. Desc.
about 80 ft. over NW. slope.

14.00 Draw, drains N. 30° E.; asc. about 50 ft. over SE. slope.

20.00 Fence, extends easterly and N. 0° 25' W.; thence along
fence line.

Dependent Resurvey of
E. Bdy., T. 1 S., R. 24 E., Salt Lake Mer., Utah

CHAINS	
26.00	Trail road, bears N. 40° E., and S. 40° W., on spur, slopes N. 40° E.; desc. about 50 ft. over NW. slope.
33.00	Draw, drains N. 55° E.; asc. about 80 ft. over SE. slope.
40.22	The cor. of secs. 25, 30, 31 and 36, at cor. of fences extending S. 0° 25' E. and S. 89° 51' W., monumented with a sandstone, 15x12x10 ins., set 6 ins. in the ground, and mkd. 1 notch on S. and 5 notches on N. edges. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd. <div style="text-align: center;"> <p>T1S R24E R25E</p> <hr style="width: 50%; margin: auto;"/> <p>S25 S30 S36 S31 1972</p> </div> Bury original cor. stone alongside iron post.
	N. 0° 25' W., bet. secs. 25 and 30. Over rolling land through sagebrush undergrowth.
10.50	Small draw, drains N. 85° E.
20.25	Point for the S. 1/16 sec. cor. of secs. 25 and 30. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. <div style="text-align: center;"> <p>T1S R24E R25E</p> <hr style="width: 50%; margin: auto;"/> <p>S1/16 S25 S30 1972</p> </div>
34.00	Trail road, bears N. 25° E. and S. 25° W.
40.50	The ¼ sec. cor. of secs. 25 and 30, monumented with a quartzite stone, 14x9x6 ins., firmly set 10 ins. in the ground, mkd. ¼ on W. face. At the cor. point Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd. <div style="text-align: center;"> <p>T1S R24E R25E ¼ S25 S30 1972</p> </div> Bury original cor. stone alongside iron post.
	N. 0° 04' W., beginning new measurement. Desc. about 80 ft. over gently rolling land.

Dependent Resurvey of
E. Bdy. T. 1 S. R. 24 E. Salt Lake Mer., Utah

CHAINS

20.23

Point for the N. 1/16 sec. cor. of secs. 25 and 30.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in collar of stone, with brass cap mkd.

T1S
R24E R25E
N1/16
S25|S30
1972

30.00

Trail road, bears N. 65° W. and S. 65° E., in small draw, draining N. 65° W.

40.46

The cor. of secs. 19, 24, 25 and 30, in an old abandoned fence line extending E. and W., monumented with a sandstone, 10x8x6 ins., set 6 ins. in the ground, and plainly mkd. 2 notches on S. and 4 on N. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

T1S
R24E R25E

S24|S19
S25|S30
1972

Bury original cor. stone alongside iron post.

N. 0° 05' W., bet. secs. 19 and 24.

Over gently rolling land through sagebrush undergrowth. Desc. about 80 ft. over general N. slope.

8.50

Improved dirt road, bears N. 50° E. and S. 50° W.

18.50

Trail road, bears E. and W.; enter scattered timber.

40.38

The ¼ sec. cor. of secs. 19 and 24, monumented with a sandstone, 15x8x6 ins., firmly set 8 ins. in the ground, and plainly mkd. ¼ on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T1S
R24E R25E

¼
S24|S19
1972

Bury original cor. stone alongside iron post.

N. 0° 09' E., beginning new measurement.

2.25

Pot Creek, 10 lks. wide, 12 ins. deep, flows irregularly E.; asc. about 30 ft. over gentle SW. slope.

Dependent Resurvey of
E. Bdy., T. 1 S., R 24 E., Salt Lake Mer., Utah

CHAINS	
17.00	<p>Base of mountain, bears NW. and SE.; asc. about 550 ft. over large boulders and ledges on SW. slope, enter medium dense timber.</p>
40.44	<p>Point for the cor. of secs. 13, 18, 19 and 24, at proportionate bearing and distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.</p> <p style="text-align: center;">T1S R24E R25E</p> <p style="text-align: center;"><u>S13 S18</u> <u>S24 S19</u> 1972</p> <p>Cor. is located at NE. cor. of sandstone boulder, 130 lks. long, 30 lks. wide, and 20 ft. high, long side bears nearly E. and W.</p> <hr/> <p>Reestablishment of the Survey Executed by A. D. Ferron, Deputy Surveyor, in 1878, and the Retracement Executed by Adolph Jessen, Deputy Surveyor, in 1898.</p> <p style="text-align: center;">_____</p> <p>N. 0° 53' W., bet. secs. 13 and 18.</p> <p>Over broken and mountainous land through dense timber. Asc. about 440 ft. over broken and ledgy SW. slope.</p>
34.30	<p>Ridge, bears N. 55° E. and S. 55° W.; desc. about 125 ft. over steep and broken NW. slope, enter dense mahogany timber.</p>
40.48	<p>Point for the ¼ sec. cor. of secs. 13 and 18, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.</p> <p style="text-align: center;">T1S R24E R25E</p> <p style="text-align: center;">¼ <u>S13 S18</u> 1972</p> <p>Desc. about 500 ft. over steep and broken NW. slope through dense mahogany.</p>
59.00	<p>Leave mahogany, bears NE. and SW.</p>
60.78	<p>Point for the N. 1/16 sec. cor. of secs. 13 and 18.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.</p>

Dependent Resurvey of
E. Bdy., T. 1 S., R. 24 E., Salt Lake Mer., Utah

CHAINS

T1S
R24E R25E

N1/16
S13|S18
1972

Desc. about 250 ft. over NW. slope.

81.08

The cor. of secs. 7, 12, 13 and 18, monumented with a quartzite stone, 36x24x24 ins., firmly set 10 ins. in the ground, with mound of stone along W. side. No visible marks on stone, but is harmoniously related to existing corners and is accepted as the original cor. monument.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T1S
R24E R25E

S12|S7
S13|S18
1972

Place original cor. stone in mound of stone, alongside the iron post.

N. 0° 24' W., bet. secs. 7 and 12.

Over rolling land through sagebrush undergrowth. Desc. about 20 ft. over NW. slope.

3.00 Small draw, drains S. 75° W.; asc. about 40 ft. over SW. slope.

3.65 Trail road, curves E. and S. 65° W.

0.00 Point of spur, slopes W.; desc. about 20 ft. over NW. slope.

1.00 Draw, drains S. 25° W. from N. 65° E.; asc. about 180 ft. over SE. slope. Enter timber.

47.50 Saddle, on ridge, bears N. 65° E. and S. 65° W.; thence along W. slope.

0.10 The ¼ sec. cor. of secs. 7 and 12, monumented with a quartzite stone, 20x16x4 ins., firmly set 6 ins. in the ground and in small mound of stone, plainly mkd. ¼ on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T1S
R24E R25E

¼
S12|S7
1972

Dependent Resurvey of
E. Bdy., T. 1 S., R. 24 E., Salt Lake Mer., Utah

CHAINS

Place original cor. stone in mound of stone, alongside iron post.

N. 0° 34' W., beginning new measurement.

Desc. about 75 ft. over NW. slope.

5.00 Leave timber.

15.00 Draw, drains W.; asc. about 100 ft. over S. slope. Enter mahogany timber.

29.80 Narrow, ledgy ridge, bears E. and W., desc. about 80 ft. over N. slope.

32.00 Leave mahogany timber.

39.82 The cor. of secs. 1, 6, 7 and 12, monumented with a quartzite stone, 24x18x14 ins., firmly set 12 ins. in the ground, and in a small mound of stone, plainly mkd. 5 notches on S. and 1 on S. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 15 ins. in the ground to bedrock, and in a mound of stone, 3½ ft. base to top, with brass cap mkd.

T1S
R24E R25E

S1|S6
S12|S7
1972

Place original cor. stone in mound of stone, alongside the iron post.

N. 0° 30' W., bet. secs. 1 and 6.

Over mountainous land through sagebrush and serviceberry undergrowth. Desc. about 40 ft. over N. slope.

10.50 Wash, drains W.; asc. about 20 ft. over gentle S. slope.

11.00 Trail road, bears E. and W.

20.12 Point for the S. 1/16 sec. cor. of secs. 1 and 6.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T1S
R24E R25E
S1/16

S1|S6
1972

Asc. about 200 ft. over steep and broken S. slope. Enter timber.

Dependent Resurvey of
E. Bdv., T. 1 S., R. 24 E., Salt Lake Mer., Utah

CHAINS

- 40.00 Low ledgy ridge, 30 lks. wide, with ledge 30 ft. high, bears E. and W.; desc. abruptly about 30 ft. over ledge facing N.
- 40.10 Base of perpendicular ledge, bears E. and W.
- 40.24 The $\frac{1}{4}$ sec. cor. of secs. 1 and 6, monumented with a quartzite stone, 18x14x10 ins., firmly set 12 ins. in the ground, and plainly mkd. $\frac{1}{4}$ on W. face.
- from which an original bearing object
- A cross (+), on face of rock ledge, 6 ft. above ground, bears South 14 lks. dist. (Record, 12 lks.)
- At the cor. point
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 15 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T1S
R24E R25E

$\frac{1}{4}$
S1|S6
1972

Bury original cor. stone alongside iron post.

N 0° 59' W., beginning new measurement.

Desc. about 100 ft. over steep and broken NW. slope.

- 7.00 Base of steep descent, bears NE. and curves W., leave timber, enter sagebrush and serviceberry undergrowth. Desc. about 120 ft. over NW. slope.
- 33.00 Wash, 10 lks. wide, 3 ft. deep, in draw, drains N. 65° W.; asc. about 40 ft. over SW. slope. Enter scattered timber.
- 40.84 The closing cor. of Tps. 1 S., Rs. 24 and 25 E., on the Salt Lake Base Line, monumented with an iron post, $2\frac{1}{2}$ ins. diam., set firmly in a mound of stone, 3 ft. base, 2 ft. high, with brass cap mkd.

S1|S6
CC
T1S
R24E R25E
1964

From this point, the stan. cor. of secs. 35 and 36, T. 1 N., R. 24 E., bears S. 89° 23' W., 5.72 chs. dist., monumented with an iron post, $2\frac{1}{2}$ ins. diam., with brass cap mkd.

SC
T1N R24E
S35|S36
1964

Dependent Resurvey of

W. Bdy., T. 1 S., R. 24 E., Salt Lake Mer., Utah

CHAINS

From the same point, the stan. $\frac{1}{4}$ sec. cor. of sec. 36, T. 1 N., R. 24 E., bears N. $89^{\circ} 23' E.$, 34.45 chs. dist., monumented with an iron post, $2\frac{1}{2}$ ins. diam., with brass cap mkd.

SC
T1N R24E
 $\frac{1}{4}$ S36
1964

Dependent Resurvey of

W. Bdy., T. 1 S., R. 24 E., Salt Lake Mer., Utah

Reestablishment of the Survey Executed by A. D. Ferron, Deputy Surveyor, in 1878

From the cor. of Tps. 1 and 2 S., Rs. 23 and 24 E., hereinbefore described.

N $0^{\circ} 21' W.$, bet. secs. 31 and 36.

Over mountainous land through sagebrush undergrowth. Asc. along E. slope.

- 10.40 Top of ascent, slopes E.; desc. 20 ft. over NE. slope.
 - 17.00 Draw, drains S. $45^{\circ} E.$; asc. 40 ft. over SW. slope.
 - 23.00 Low spur, slopes S. $30^{\circ} E.$; thence along E. slope.
 - 36.55 Capped spring, bears East 63 lks. dist.
 - 37.75 Draw, drains S. $15^{\circ} E.$; thence along E. side of draw.
 - 39.40 Trail road, bears S. $30^{\circ} E.$ and curves N.
 - 40.40 Point for the $\frac{1}{4}$ sec. cor. of secs. 31 and 36, at proportionate dist.; there is no remaining evidence of the original cor.
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T1S
R23E R24E

$\frac{1}{4}$
S36|S31
1972

Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

Asc. 30 ft. along E. side of draw.

- 47.00 Top of ascent, slopes W.; desc. 10 ft. over NW slope.
- 51.00 Trail road, bears N. $20^{\circ} E.$ and curves S.
- 51.10 Draw, drains S. $15^{\circ} W.$; asc. 60 ft. over SE. slope.
- 70.00 Top of ascent, slopes E.; desc. 10 ft. over NE. slope.
- 79.75 Draw, drains S. $45^{\circ} E.$

Dependent Resurvey of
W. Bdv., T. 1 S., R. 4 E., Salt Lake Mer., Utah

CHAINS
80.80

1st cor. of secs. 25, 30, 31 and 36, monumented with a juniper post, 3 ft. long, 3 ins. diam., set 24 ins. in the ground. This point is harmoniously related to existing original cors., and has long been recognized by local land owners, and is accepted as the best existing evidence of the original cor.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T1S
R23E R24E

S25|S30
S36|S31
1972

Place juniper post alongside iron post.

Reestablishment of the Survey and Resurvey Executed by
A. D. Ferron, Deputy Surveyor in 1878 and 1908.

N 1° 08' W., bet. secs. 25 and 30.

Over mountainous land through sagebrush undergrowth.
Asc. 40 ft. over SE. slope.

19.30 Trail road, near junction, bears N. 40° E. and S. 40° W.

32.00 Top of ascent, slopes E.; desc. 40 ft. over NE. slope.

40.28 The ¼ sec. cor. of secs. 25 and 30, monumented with a limestone, 20x10x6 ins., firmly set 10 ins. in the ground, and plainly mkd. ¼ on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T1S
R23E R24E

¼
S25|S30
1972

Bury original cor. stone alongside iron post.

N. 0° 55' W., beginning new measurement.

Along gently rolling E. slope.

27.00 Draw, drains S. 40° E.; asc. 30 ft. over SE. slope.

38.58 The closing cor. of secs. 24 and 25, T. 1 S., R. 23 E., monumented with a limestone, 6x6x5 ins. above ground, at cor. of fences, extending W. and N., plainly mkd. 2 grooves on S. and 4 on N. faces; thence along fence line.

Dependent Resurvey of
W. Bdy., T. 1 S., R. 24 E., Salt Lake Mer., Utah

CHAINS
40.36

The cor. of secs. 19 and 30, monumented with a limestone, 24x12x8 ins., firmly set 12 ins. in the ground, and plainly mkd. 2 notches on S. and 4 on N. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T1S
R23E R24E

S24 | S19
 | S30
 1972

Bury original cor. stone alongside iron post.

N. 0° 59' W., along the W. bdy. of sec. 19.

Over mountainous land through sagebrush undergrowth. Asc. 60 ft. over SE. slope, and along fence line.

- 0.05 Fence, turns E., leave fence line.
- 6.00 Spur, slopes E.; desc. 25 ft. over NE slope.
- 16.00 Draw, drains E.; asc. 100 ft. over SE. slope.
- 29.00 Top of ascent, slopes E.; thence along E. slope.
- 36.40 Desc. 20 ft. over NE. slope.
- 40.22 The W. ¼ sec. cor. of sec. 19, monumented with a limestone, 18x14x6 ins., firmly set 10 ins. in the ground, and plainly mkd. ¼ on W. face, in fence line extending E. and W.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T1S
R23E R24E

¼
 | S19
 1972

Bury original cor. stone alongside iron post, and raise a mound of stone, 2½ ft. base, 1½ ft. high, E. of cor.

N. 0° 15' W., beginning new measurement.

Desc. 60 ft. over NE. slope.

- 11.50 Draw, drains N. 80° E.; asc. 20 ft. over SE. slope.
- 17.00 Spur, slopes E.; desc. 40 ft. over NE. slope.
- 18.50 Trail road, bears N. 45° E. and S. 45° W.

Dependent Resurvey of
W. Bdy., T. 1 S., R. 24 E., Salt Lake Mer., Utah

CHAINS

38.34

Closing cor. of secs. 13 and 24, T. 1 S., R. 23 E.,
monumented with a sandstone, 10x8x5 ins. above ground,
mkd. 3 grooves on N. and S. faces.

40.28

The cor. of secs. 18 and 19, monumented with a limestone,
14x9x8 ins., firmly set 8 ins. in the ground, and plainly
mkd. 3 notches on N. and S. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T1S
R23E R24E

S13|S18
|S19
1972

Bury original cor. stone alongside iron post, and raise
a mound of stone, 2½ ft. base, 1½ ft. high, E. of cor.

N. 0° 05' E., along the W. bdy. of sec. 18.

Over mountainous land through sagebrush undergrowth.
Desc. 10 ft. over NE. slope.

5.50

Trail road, bears N. 30° W. and S. 30° E., in broad hol-
low, drains S. 30° E.; asc. 150 ft. over steep SW.
slope.

10.00

Enter timber, bears NW. and SE.

19.00

Rocky outcrop, on ledgy spur, slopes S. 25° E.

19.89

Point for the S. 1/16 sec. cor. of sec. 18 only.

Set an iron post, 30 ins. long, 2½ ins. diam., 3 ins. in
the ground to bedrock, and in a mound of stone, 4 ft.
base to top, with brass cap mkd.

T1S
R23E R24E

S1/16
|S18
1972

Asc. 240 ft. over SE. slope.

33.00

Fence, bears E. and W.

39.78

The W. ¼ sec. cor. of sec. 18, monumented with a sand-
stone, 18x12x10 ins., firmly set in a mound of stone,
2 ft. base, and plainly mkd. ¼.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., over a
cross (+), on solid sandstone, and in a mound of stone,
4 ft. base to top, with brass cap mkd.

Dependent Resurvey of
W. Bdy., T. 1 S., R. 24 E., Salt Lake Mer., Utah

CHAINS

T1S
R23E R24E

$\frac{1}{4}$
|S18
1972

Place original cor. stone in mound of stone, alongside iron post.

N. 0° 08' E., beginning new measurement.

Asc. 300 ft. over broken SE. slope.

29.50 Ridge, bears W. and S. 70° E.; thence by triangulation, desc. about 400 ft. over broken N. slope.

40.10 Point for the cor. of secs. 7 and 18, at proportionate bearing and dist.; there is no remaining evidence of the original cor. End triangulation.

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T1S
R23E R24E

S12|S7
|S18
1972

Reestablishment of the Survey Executed by A. D. Ferron, Deputy Surveyor, in 1878.

N. 0° 20' E., along the W. bdy. of sec. 7.

Over mountainous land through dense timber. By triangulation, desc. about 320 ft. over steep NE. slope.

20.16 Point for the S. 1/16 sec. cor. of sec. 7 only. End triangulation.

Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T1S
R23E R24E

S1/16
|S7
1972

Desc. 140 ft. over NE. slope.

24.00 Leave dense timber, bears NW. and SE.; enter sagebrush and grass.

40.32 The ¼ sec. cor. of secs. 7 and 12, monumented with a weathered aspen post, 6 ft. long, 4 ins. diam., set 24 ins. in the ground, dimly scribed ¼ on W. face.

At the cor. point

Dependent Resurvey of
W. Bd^r., T. 1 S., R. 24 E., Salt Lake Mer., Utah

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T1S
R23E R24E

½
S12|S7
1972

Set original cor. post, inverted and alongside iron post, and raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor.

N. 1° 07' E., beginning new measurement.

Over gently rolling pasture land.

- 9.05 Fence, bears N. 43° 21' W. and S. 43° 21' E.
- 9.55 Improved dirt road, bears N. 43° 21' W. and S. 43° 21' E.
- 10.10 Fence, bears N. 43° 21' W. and S. 43° 21' E.
- 18.00 Cow Creek, drains irregularly E.
- 20.70 Fence, bears E. and W. Leave pasture.
- 23.45 Trail road, bears N. 50° E. and S. 80° W.
- 38.00 Pot Creek, 10 lks. wide, 15 ins. deep, flows irregularly S. 50° E.
- 40.14 The cor. of secs. 1, 6, 7 and 12, monumented with a quartzite stone, 20x10x4 ins., firmly set 10 ins. in the ground, and mkd. 5 notches on S. and 1 on N. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T1S
R23E R24E

S1|S6
S12|S7
1972

Bury original cor. stone alongside iron post, and raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor.

N. 3° 39' W., bet. secs. 1 and 6.

Over rolling land through sagebrush undergrowth.

- 11.00 Leave valley, asc. about 140 ft. over SW. slope. Enter dense timber.
- 39.85 Point for the ¼ sec. cor. of secs. 1 and 6, at proportionate dist.; there is no remaining evidence of the original cor.

Dependent Resurvey of

S. 34y., T. 1 S., R. 24 E., Salt Lake Mer., Utah

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap nkd.

T15
R23E R24E

S
S11S6
1972

As to 60 ft. over SW. slope.

ridge, angles N. 75° W. and N. 65° E.; thence by triangulation, less about 125 ft. over SW. slope.

The closing cor. of Tps. 1 S., Rs. 23 and 24 E., on the Salt Lake Base line, monumented with an iron post, 2 1/2 ins. diam., extending 6 ins. above ground, with mound of stone to top, brass cap nkd.

S11S6
CC

R23E R24E
T15
1964

triangulation.

From this point, the standard cor. of secs. 15 and 16, T. 1 N., R. 23 E., bears S. 89° 04' W., 8.90 chs. dist., monumented with an iron post, 2 1/2 ins. diam., with brass cap nkd.

SC
T1N R23E
S15S16
S1
1964

From the same point, the standard 1/4 sec. cor. of sec. 16, T. 1 N., R. 23 E., bears N. 89° 04' E., 14.22 chs. dist., monumented with an iron post, 2 1/2 ins. diam., with brass cap nkd.

T1N R23E
S15S16
1964

Dependent Resurvey of

S. 34y., T. 1 S., R. 24 E., Salt Lake Mer., Utah

Re-establishment of the Survey Resurveyed by A. H. Ferron, Santa Fe Survey, in 1879.

From the cor. of secs. 15 and 16, on the S. bdy. of the Twp., described as described

S. 89° 10' W., bet. secs. 15 and 16.

Dependent Resurvey of
Subdivision, T. 1 S., R. 24 E., Salt Lake Mer., Utah

CHAINS

Over gently rolling land through dense sagebrush undergrowth.

13.00 Small draw, drains N. 80° E.

20.26 Point for the S. 1/16 sec. cor. of secs. 35 and 36.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T1S R24E
S1/16
S35|S36
1972

31.30 Trail road, bears N. 70° E. and S. 70° W. about 1.00 ch. to junction with trail road bearing N. and S.

40.52 Point for the ¼ sec. cor. of secs. 35 and 36, at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T1S R24E
¼
S35|S36
1972

57.70 Improved dirt road, bears N. 23° E. and S. 23° W.

65.50 Trail road, bears E. and W.

81.04 The cor. of secs. 25, 26, 35 and 36, in fence line, extending S. 89° 58' E. and N. 70° W., monumented with a sandstone, 12x8x6 ins., firmly set 6 ins. in the ground and plainly mkd. 1 notch on S. and E. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T1S R24E
S26|S25
S35|S36
1972

Bury original cor. stone alongside iron post.

From the cor. of secs. 25, 30, 31 and 36, on the E. bdy. of the Tp., hereinbefore described.

S. 89° 51' W., bet. secs. 25 and 36.

Over gently rolling land through sagebrush undergrowth, and along fence line.

40.23 The ¼ sec. cor. of secs. 25 and 36, monumented with a sandstone, 12x10x6 ins., firmly set 6 ins. in the ground, in fence line, plainly mkd. ¼ on N. face.

At the cor. point

Dependent Resurvey of
Subdivision, T. 1 S., R 24 E. Salt Lake Mer., Utah

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone with brass cap mkd.

T1S R24E

$$\frac{1}{4} \frac{S25}{S36}$$

1972

Bury original cor. stone alongside iron post.

N. 89° 58' W., beginning new measurement.

Continue along fence line.

3.10 Road, bears N. 50° E. and W. along S. side of fence.

20.06 Point for the W. 1/16 sec. cor. of secs. 25 and 36.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T1S R24E

$$W1/16 \frac{S25}{S36}$$

1972

30.10 Improved dirt road, bears N. 25° E. and S. 25° W., end of trail road along S. side of fence.

40.12 The cor. of secs. 25, 26, 35 and 36.

NOTE:

On account of perpendicular ledges, the original line bet. secs. 25 and 26, was run on an offset to the east, and the ¼ sec. cor. of secs. 25 and 26 was never established.

N. 0° 08' E., bet. secs. 25 and 26 on true line.

Over gently rolling land through sagebrush undergrowth. Asc. about 20 ft. over gentle SE. slope.

13.00 Base of steep and broken mountain, bears NE. and SW.; asc. about 550 ft. over broken and ledgy SE. slope. Enter dense mahogany timber.

38.50 Top of ascent, broken ledges, slopes sharply E.; thence along face of broken ledges.

39.76 Point for the ¼ sec. cor. of secs. 25 and 26, at proportionate dist. falls on face of near vertical ledges and cannot be perpetuated.

Point selected for the witness ¼ sec. cor. of secs. 25 and 26, bears S. 82° 33' W., 0.77 chs. dist.

At witness ¼ sec. cor. point

Dependent Resurvey of
Subdivision T. 1 S. R. 24 E. Salt Lake Mer. Utah

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., over a cross (+) on solid sandstone, on top of ledge, 30 ft. high, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T1S R24E
¼
W C →
S26|S25
1972

From true point for ¼ sec. cor. of secs. 25 and 26.

Continue along broken ledges facing E.

46.00 Ledy spur, slopes sharply N. 65° E.; desc. about 800 ft. over broken and precipitous NE. slope.

79.52 Point for the cor. of secs. 23, 24, 25 and 26, at cor. of old abandoned fence line extending westerly and southerly, and old fence lines extending about N. 2° W. and N. 89° E. This position is harmoniously related to existing original corners, and has long been recognized as the corner point by local land owners, and is accepted as the best existing evidence of the position of the original cor.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T1S R24E
S23|S24
S26|S25
1972

From the cor. of secs. 19, 24, 25 and 30, on the E. bdy. of the Tp., hereinbefore described.

S. 88° 57' W., bet. secs. 24 and 25.

Over gently rolling land through sagebrush undergrowth, and along old fence line.

7.00 Wash, drains N.

10.00 Improved dirt road, bears N. 50° E. and S. 50° W.

14.00 Junction of trail road from N. 55° W., and improved dirt road from west, curving S. 70° E. about 3.00 chs. to previous improved road bearing N. 50° E. and S. 50° W., continue along fence line and along N. side of improved road.

39.92 Point for the ¼ sec. cor. of secs. 24 and 25, at proportionate dist.; there is no remaining evidence of the original cor.

Set iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, in old fence line, with brass cap mkd.

T1S R24E
S24
¼ S25
1972

Dependent Resurvey of
Subdivision, T. 1 S., R. 24 E., Salt Lake Mer., Utah

CHAINS	
	Continue along fence line on N. side of road.
78.00	Road, curves to N. 40° W.; enter mahogany timber. Asc. 10 ft. over NE slope.
79.84	The cor. of secs. 23, 24, 25 and 26.
N. 0° 03' W., bet. secs. 23 and 24.	
Over gently rolling land through mahogany timber and sagebrush undergrowth, and along E. side of old fence line.	
1.50	Improved dirt road, curves S. 40° E. and N. 45° W., leave mahogany timber.
11.30	Wash, drains E.
20.00	Fence, bears E. and W. 60 lks. to cor., thence S. 2° E. and W.
31.00	Trail road, bears E. and W., also, SE. cor. of Crouse Reservoir, bears W. about 3.00 chs. dist., thence along E. side of dam extending nearly N.
39.20	Pot Creek, 5 lks. wide, 12 ins. deep, flows irregularly SE. from Crouse Reservoir; outlet bears N. 30° W., 2.25 chs. dist.
40.18	Point for the $\frac{1}{4}$ sec. cor. of secs. 23 and 24, at proportionate dist.; there is no remaining evidence of the original cor.
Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.	
T1S R24E	
$\frac{1}{4}$	
S23 S24	
1972	
Asc. 40 ft. over ledgy SW. slope. Enter timber.	
43.20	Ledgy point of spur, 15 ft. high, projects W.; desc. 40 ft. over NW. slope. North end of dam bears W. 1.00 ch. dist.
50.00	Base of descent; E. edge of reservoir, curves NW. and SW.; asc. 50 ft. over SW. slope.
60.85	Spur, slopes S. 70° W.; desc. about 40 ft. over NW. slope.
64.00	Present water line of reservoir, bears N. 45° E. and S. 45° W.; thence across water.
71.00	Present water line, bears N. 30° W. and S. 30° E.; asc. 40 ft. over SW. slope.
80.36	The cor. of secs. 13, 14, 23 and 24, monumented with a quartzite stone, 28x12x8 ins., firmly set 12 ins. in the ground, and plainly mkd. 3 notches on S. and 1 on E. edges.
At the cor. point	

Dependent Resurvey of
Subdivision, T. 1 S., R. 24 E., Salt Lake Mer., Utah

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T1S R24E

S14|S13
S23|S24
1972

Bury original cor. stone alongside iron post.

From the cor. of secs. 13, 18, 19 and 24, on the E. bdy. of the Tp., hereinbefore described.

S. 88° 48' W., bet. secs. 13 and 24.

Over broken mountain land through mahogany and scattered juniper and pinon timber.

- 1.30 SW. cor. of boulder, 150 lks. long, 30 lks. wide, and 20 ft. high; desc. about 100 ft. over broken SW. slope.
- 10.00 Rocky draw, drains S.; asc. about 120 ft. over broken and ledgy SE. slope.
- 14.50 Ledgy ridge, bears N. and S.; desc. about 440 ft. over broken SW. slope. Timber becomes scattered.
- 33.90 Draw, drains S. 15° W.; asc. 80 ft. over SE slope. Enter dense timber.
- 39.97 Point for the ¼ sec. cor. of secs. 13 and 24, at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T1S R24E

¼ S13
S24
1972

Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.

Asc. about 320 ft. over broken SE. slope.
- 52.50 Narrow, ledgy ridge, bears N. 20° E. and S. 20° W.; desc. about 500 ft. over broken and ledgy NW slope. Enter dense mahogany,
- 77.90 Flat draw, drains S. 45° W.; thence along S. slope. Leave mahogany.
- 79.94 The cor. of secs. 13, 14, 23 and 24.

N. 1° 36' W., bet. secs. 13 and 14.

Over mountainous land through dense timber. Asc. 120 ft. over S. slope.

- 9.00 Spur, slopes S. 40° W.; asc. about 120 ft. over broken SW. slope.

- 20.90 Point for the S. 1/16 sec. cor. of secs. 13 and 14.

Dependent Resurvey of
Subdivision, T. 1 S., R. 24 E., Salt Lake Mer., Utah

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T1S R24E

S1/16
S14|S13
1972

Asc. 50 ft. over broken and ledgy SW. slope.

- 21.90 Broken, ledgy ridge, bears S. 40° E. and curves N.; desc. 80 ft. along broken E. slope. Enter dense mahogany.
- 31.00 Spur, slopes N. 65° E.; desc. 200 ft. over broken N. slope.
- 34.00 Beginning of old fence line, at base of ledge, 10 ft. high, bears E. and W.; thence along fence line.
- 38.00 Leave mahogany timber.
- 41.80 Point for the ¼ sec. cor. of secs. 13 and 14, at proportionate dist. latitudinally, and controlled longitudinally by old fence line; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T1S R24E

¼
S14|S13
1972

N. 0° 37' W., beginning new measurement.

Desc. 20 ft. over gentle N. slope.

- 3.20 Draw, drains W. from reservoir, center of dam, 7.00 chs. long, extending nearly N. and S., bears E. 1.00 ch. dist. Reservoir extends easterly about 20.00 chs.
- 15.50 Trail road, bears N. 70° E. and S. 70° W.
- 35.00 Present water line of small reservoir, bears N. 70° W. about 7.00 chs., and S. 70° E. about 10.00 chs.; thence over water.
- 41.78 Point for the cor. of secs. 11, 12, 13 and 14, at cor of fences, on N. edge of reservoir, with fences bearing S. 0° 37' E., S. 89° 17' W. and S. 89° 30' E. This point is harmoniously related to existing original corners, and is accepted as the best existing evidence of the position of the original corner.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

Dependent Resurvey of
Subdivision T. 1 S., R. 24 E., Salt Lake Mer., Utah

CHAINS

T1S R24E

$\frac{S11|S12}{S14|S13}$
1972

Reestablishment of the Survey Executed by A. D. Ferron,
Deputy Surveyor, in 1879, and the Retracement Executed by
Adolph Jessen, Deputy Surveyor, in 1898.

From the cor. of secs. 7, 12, 13 and 18, on the E. bdy.
of the Tp., hereinbefore described.

N. 89° 30' W., bet. secs. 12 and 13.

Over gently rolling land through sagebrush undergrowth.

7.00 Draw, drains S. 65° W.

9.50 Trail road, bears N. 65° E. and S. 65° W.

20.27 Point for the E. 1/16 sec. cor. of secs. 12 and 13.

Set and iron post, 30 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T1S R24E

$E1/16 \frac{S12}{S13}$
1972

33.00 Base of spur, bears NE. and SW.; asc. about 140 ft. over
broken and ledgy SE. slope. Enter dense timber.

40.20 Top of ledge, about 30 ft. high, bears N. 30° E. and S.
30° W.

40.54 Point for the ¼ sec. cor. of secs. 12 and 13, at propor-
tionate dist.; there is no remaining evidence of the
original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in
the ground to bedrock, and in a mound of stone, 4 ft.
base to top, with brass cap mkd.

T1S R24E

$\frac{1}{4} \frac{S12}{S13}$
1972

Asc. 160 ft. over broken SE. slope.

50.40 Rocky spur, slopes S. 40° W.; desc. 180 ft. over NW.
slope.

60.53 Point for the W. 1/16 sec. cor. of secs. 12 and 13.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins in
the ground, with brass cap mkd.

Dependent Resurvey of
Subdivision, T. 1 S., R. 24 E., Salt Lake Mer., Utah

CHAINS

T1S R24E

W1/16 $\frac{S12}{S13}$
1972

Raise a mound of stone, 3 ft. base, 1½ ft. high, N. of cor.

Desc. about 100 ft. over NW. slope.

68.00 Fence, at base of spur, bears N. and N. 89° 30' W.; thence along fence line. Leave timber.

80.52 The cor. or secs. 11, 12, 13 and 14.

Reestablishment of the Survey Executed by Adolph Jessen, Deputy Surveyor, in 1898.

N. 0° 36' W., bet. secs. 11 and 12.

Over cultivated land.

19.00 Trail road, bears N. 20° E. and S. 20° W.

40.11 Point for the ¼ sec. cor. of secs. 11 and 12, at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T1S R24E

¼
S11|S12
1972

from which

The center pipe of windmill, bears N. 61° 50' E., 18.00 chs. dist.

52.00 Calder ditch, 5 lks. wide, 1 ft. deep, drains N. 45° E.

57.00 Trail road, bears E. and W.

60.00 Fence, bears E. and W. 9 lks. to cor., thence N., with trail road along W. side; thence along E. side of fence line.

80.22 The cor. of secs. 1, 2, 11 and 12, monumented with a sandstone, 18x10x5 ins., firmly set 12 ins. in the ground, in N.-S. fence line, and in line with fence extending W., plainly mkd. 5 notches on S. and 1 on E. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T1S R24E
 $\frac{S2|S1}{S11|S12}$
1972

273

Dependent Resurvey of
Subdivision T. 1 S. R. 24 E., Salt Lake Mer., Utah

CHAINS

Bury original cor. stone alongside iron post, and raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor.

From the cor. of secs. 1, 6, 7 and 12, on the E. bdy. of the Tp., hereinbefore described.

N. 87° 54' W., bet. secs. 1 and 12.

Over rolling land through scattered mahogany and juniper timber. Asc. 40 ft. over NE slope.

7.50 Top of ascent, slopes N.; desc. about 80 ft. over NW slope.

15.00 Leave scattered timber.

40.21 The ¼ sec. cor. of secs. 1 and 12, monumented with a sandstone, 22x9x6 ins., firmly set 10 ins. in the ground, and in a small mound of stone, plainly mkd. ¼ on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T1S R24E

¼ $\frac{S1}{S12}$
1972

Bury original cor. stone alongside iron post, and raise a mound of stone, 2½ ft. base, 2 ft. high, N. of cor.

S. 89° 12' W., beginning new measurement.

Desc. 15 ft. over gentle W. slope.

12.20 Trail road, on curve, bears N. 70° E. and S. 40° W.

17.00 Wash, 10 lks. wide, 2 ft. deep, drains S. 30° W. from N. 70° E.; asc. 30 ft. over E. slope.

30.20 Trail road, on ridge, bears N. 15° E. and S. 15° W.; desc. 20 ft. over W. slope.

40.32 The cor. of secs. 1, 2, 11 and 12.

N. 0° 38' W., bet. secs. 1 and 2.

Over rolling land through sagebrush undergrowth, and along fence line, with trail road along W. side.

40.37 The ¼ sec. cor. of secs. 1 and 2, monumented with a sandstone, 20x16x10 ins., firmly set 10 ins. in the ground, in fence line, with small mound of stone alongside, plainly mkd. ¼ on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

Dependent Resurvey of
Subdivision, T. 1 S., R. 24 E., Salt Lake Mer. Utah

CHAINS

T1S R24E

$\frac{1}{4}$
S2|S1
1972

Bury original cor. stone alongside iron post, and raise a mound of stone, $2\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

N. $0^{\circ} 30'$ W., beginning new measurement.

Continue along fence line.

- 15.00 Trail road along W. side of fence turns to NW.
- 26.00 Draw, 15 ft. deep, drains E.; asc. 40 ft. over general SE. slope.
- 29.00 Same trail road as previously stated, bears E. and W.; enter widely scattered timber.
- 36.00 Spur, slopes S. 60° E., desc. 20 ft. over NE. slope. Fence turns to NW. along spur.
- 38.94 The closing cor. of secs. 1 and 2, on the Salt Lake Base Line, monumented with an iron post, $2\frac{1}{2}$ ins. diam., firmly set in mound of stone, $3\frac{1}{2}$ ft. base, $2\frac{1}{2}$ ft. high, with brass cap mkd.

S2|S1
C C
T1S R24E
1964

From this point, the stan. cor. secs. 34 and 35, T. 1 N., R. 24 E., bears S. $89^{\circ} 23'$ W., 5.62 chs. dist., monumented by an iron post, $2\frac{1}{2}$ ins. diam., with brass cap mkd.

SC
T1N R24E
S34|S35
1964

From the same point, the stan. $\frac{1}{4}$ sec. cor. of sec. 35, T. 1 N., R. 24 E., bears N. $89^{\circ} 23'$ E., 34.55 chs. dist., monumented by an iron post, $2\frac{1}{2}$ ins. diam., with brass cap mkd.

SC
T1N R24E
 $\frac{1}{4}$ S35
1964

Reestablishment of the Survey Executed by A. D. Ferron, Deputy Surveyor, in 1879.

From the cor. of secs. 34 and 35, on the S. bdy. of the Tp., hereinbefore described.

N. $0^{\circ} 33'$ E., bet. secs. 34 and 35.

Over gently rolling land through sagebrush undergrowth.

Dependent Resurvey of
Subdivision, T. 1 S., R. 24 E., Salt Lake Mer., Utah

CHAINS
39.80

Trail road, bears N. 55° W. and S. 55° E.

40.24

Point for the 1/4 sec. cor. of secs. 34 and 35, at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.

T1S R24E

1/4
S34|S35
1972

Raise a mound of stone, 2 1/2 ft. base, 1 1/2 ft. high, W. of cor.

80.48

Point for the cor. of secs. 26, 27, 34 and 35, at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.

T1S R24E

S27|S26
S34|S35
1972

From the cor. of secs. 25, 26, 35 and 36.

S. 87° 48' W., bet. secs. 26 and 35.

Over mountainous land through sagebrush undergrowth. Asc. 60 ft. over gentle E. slope.

7.00

Base of rocky spur, bears N. and S.; asc. about 300 ft. over broken and ledgy E. slope.

11.00

Enter dense timber.

18.20

Top of ledgy spur, projects S.; desc. abruptly 60 ft. over ledgy W. slope.

20.14

Point for the E. 1/16 sec. cor. of secs. 26 and 35.

Set an iron post, 30 ins. long, 2 1/2 ins. diam., over a cross(+), on solid sandstone, near base of overhanging ledge, 20 ft. high, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T1S R24E

E1/16 S26
S35
1972

from which

A cross (+), 6 ft. above ground, on N. face of ledge, 20 ft. high bears South, 5 lks. dist.

Desc. 60 ft. over broken NW. slope.

25.00

Rocky draw, drains S. 47° W.; desc. 250 ft. over broken SW. changing to W. slope.

Dependent Resurvey of
Subdivision. T. 1 S.. R. 2' E., S. 1/4 Sec. 26, 27, 34, 35

CHAINS	
33.00	Leave dense timber.
40.28	The 1/4 sec. cor. of secs. 26 and 35, monumented with a mound of stone, 2 ft. base, 1 1/2 ft. high, no visible marks on rocks, but is harmoniously related to existing original corners, and is accepted as the best existing evidence of the position of the original cor. At the cor. point Set an iron post, 30 ins. long, 2 1/2 ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd. T1S R24E 1/4 S26 S35 1972
	N. 89° 39' W., beginning new measurement. Desc. 30 ft. over W. slope. Leave timber.
4.50	Wash, 10 lks. wide, 3 ft. deep, at base of spur, drains N. 20° W., asc. 100 ft. over gently rolling land.
40.01	The cor. of secs. 26, 27, 34 and 35. <hr/>
	N. 0° 14' W., bet. secs. 26 and 27. Over gently rolling land through sagebrush undergrowth. Desc. 60 ft. along general E. slope.
40.24	Point for the 1/4 sec. cor. of secs. 26 and 27, at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd. T1S R24E 1/4 S27 S26 1972
	Raise a mound of stone, 2 1/2 ft. base, 1 1/2 ft. high, W. of cor. Desc. 40 ft. over NW. slope.
47.00	Small draw, drains N. 48° E.; asc. 20 ft. over general E. slope.
51.00	Improved dirt road, bears S. 25° W. and curves N. 5° E.
60.36	Point for the N. 1/16 sec. cor. of secs. 26 and 27. Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins in the ground, with brass cap mkd. T1S R24E N1/16 S27 S26 72

Dependent Resurvey of
Subdivision T. 1 S. R. 24 E., Salt Lake Mer., Utah

CHAINS

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

60.67 Fence, bears N. 89° 10' E. and S. 89° 10' W., enter cultivated land.

80.48 Point for the cor. of secs. 22, 23, 26 and 27, at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T1S R24E

S22 | S23

S27 | S26

1972

Raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor.

From the cor. of secs. 23, 24, 25 and 26.

S. 89° 35' W., bet. secs. 23 and 26.

Over rolling land through mahogany timber. Asc. 80 ft. over NE. slope.

10.50 Top of ascent, slopes N.; desc. about 50 ft. over NW slope. Leave timber.

27.00 Draw, drains N.; asc. 50 ft. over E. slope.

35.00 Low spur, slopes N. 45° E.; desc. 20 ft. over gentle NW slope.

40.64 The ¼ sec. cor. of secs. 23 and 26, monumented with a quartzite stone, 14x6x3 ins., firmly set 6 ins. in the ground, with mound of stone to S., plainly mkd. ¼ on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

T1S R24E

¼ S23

¼ S26

1972

Bury original cor. stone alongside iron post.

S. 89° 51' W., beginning new measurement.

Over gently rolling land.

5.00 Draw, 15 ft. deep, drains N. 53° E.; asc. 80 ft. over gently rolling E. slope. Enter cultivated land.

37.00 Improved dirt road, bears N. 5° E. and S. 5° W.

40.13 The cor. of secs. 22, 23, 26 and 27.

Dependent Resurvey of
Subdivision T. 1 S., R. 24 E., Salt Lake Mer., Utah

CHAINS

N. 0° 10' W., bet. secs. 22 and 23.

Over gently rolling cultivated land.

40.24 Point for the $\frac{1}{4}$ sec. cor. of secs. 22 and 23, at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T1S R24E

$\frac{1}{4}$
S22|S23
1972

Raise a mound of stone, $2\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

Continue over cultivated land.

80.48 Point for the cor. of secs. 14, 15, 22 and 23, at proportionate dist. longitudinally, and controlled latitudinally by E.-W. fence, on the section line, according to a statement by Zeiph Calder, life long resident of the area and adjacent land owner.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

T1S R24E

S15|S14
S22|S23
1972

From the cor. of secs. 13, 14, 23 and 24.

N. 89° 55' W., bet. secs. 14 and 23.

Over rolling land through scattered timber, along S. slope.

10.50 Point of spur, slopes W.; desc. 20 ft. over W. slope. Leave timber.

13.50 Water line of Crouse Reservoir, bears N. and S., thence across water.

33.50 Present water line of reservoir, bears S. 60° E. and curves N.; enter dense sagebrush.

40.52 The $\frac{1}{4}$ sec. cor. of secs. 14 and 23, at cor. of fences, extending S. and W., monumented with a sandstone, 10x6x5 ins., set 4 ins. in the ground, plainly mkd. $\frac{1}{4}$ on the N. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T1S R24E

$\frac{1}{4}$ S14
S23
1972

Dependent Resurvey of
Subdivision, T. 1 S., R. 24 E., Salt Lake Mer., Utah

CHAINS

Bury original cor. stone alongside iron post.

S. 89° 28' W., beginning new measurement.

Over gently rolling land, along fence line. Cultivated land to S.

25.90 Improved dirt road, bears S. 5° W., and curves W. along fence line.

40.42 The cor. of secs. 14, 15, 22 and 23.

N. 0° 39' W., bet. secs. 14 and 15.

Over rolling land through sagebrush undergrowth. Asc. about 20 ft. over gently rolling S. slope.

0.20 Improved dirt road, bears E. and W.

12.00 Trail road, on low rise, bears N. 75° E. and S. 20° W.; desc. 40 ft. over N. slope.

20.20 Pot Creek, 5 lks. wide, 3 ins. deep, flows irregularly N. 70° E. from Calder Reservoir, about 10.00 chs. W.

20.35 Point for the S. 1/16 sec. cor. of secs. 14 and 15.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

T1S R24E

S1/16
S15|S14
1972

Raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor.

Asc. 30 ft. along general E. slope.

33.00 Calder Ditch, 15 lks. wide, 2 ft. deep, flows N. 62° E. from S. 5° W., asc. about 140 ft. over broken SE. slope. Enter dense juniper and pinon timber.

40.70 Point for the ¼ sec. cor. of secs. 14 and 15, at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T1S R24E

¼
S15|S14
1972

Asc. 225 ft. over broken and ledgy SE. slope.

49.50 Rocky spur, slopes E.; desc. about 225 ft. over broken NE. slope. Enter dense mahogany timber.

61.05 Point for the N. 1/16 sec. cor. of secs. 14 and 15.

Dependent Resurvey of
Subdivision, T. 1 S., R. 24 E., Salt Lake Mer., Utah

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 3 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T1S R24E

N1/16
S15|S14
1972

Desc. 40 ft. over NE. slope.

- 62.50 Leave timber, bears E. and W.
- 67.00 Base of descent, cove, slopes E.; asc. 40 ft. over SE. slope.
- 72.50 Low spur, slopes S. 75° E.; desc. 30 ft. over NE slope.
- 76.00 Draw, drains S. 45° E.; asc. 30 ft. over SW. slope.
- 77.50 Trail road, bears N. 45° W. and S. 45° E. Enter scattered timber.
- 81.40 The cor. of secs. 10, 11, 14 and 15, monumented with a mound of stone, 1½ ft. base, 1 ft. high. No visible marks, but is only mound in area, and is accepted as the best existing evidence of the position of the original cor.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T1S R24E

S10|S11
S15|S14
1972

Raise a mound of stone, 3 ft. base, 1½ ft. high, W. of cor.

From the cor. of secs. 11, 12, 13 and 14.

S. 89° 17' W., bet. secs. 11 and 14.

Over gently rolling land, along fence line, and over water.

- 5.00 W. edge of reservoir, curves N. 20° E. and S. 40° E.; thence over cultivated land.
- 9.50 Trail road, bears N. 20° E. and S. 20° W.
- 33.00 Calder Ditch, 15 lks. wide, 3 ft. deep, flows N. 32° E.
- 39.85 Fence turns to NW. about 3.00 chs. to base of hill, and end.
- 40.00 Trail road, bears S. and N. 22° E.
- 40.14 Point for the ¼ sec. cor. of secs. 11 and 14, at proportionate dist. longitudinally, and controlled latitudinally by an old fence to the E. on the section line, according to a statement by Zelfh Calder, life time resident of the area.

Dependent Resurvey of
Subdivision, T. 1 S., R. 24 E., Salt Lake Mer., Utah

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in
ground, with brass cap mkd.

T1S R24E

$\frac{1}{4}$ S11
 $\frac{1}{4}$ S14
1972

Raise a mound of stone, 2½ ft. base, 1½ ft. high, N. of
cor.

S. 87° 13' W., beginning new measurement.

- 3.50 Base of spur, bears N. and S.; asc. 120 ft. over broken
E. slope.
- 7.50 Rocky spur, projects S.; desc. 80 ft. over SW. slope.
Enter scattered timber.
- 14.00 Draw, drains S.; asc. 100 ft. over SE. slope.
- 36.00 Top of ascent, slopes S.; desc. 20 ft. along S. slope.
Enter dense timber.
- 40.19 The cor. of secs. 10, 11, 14 and 15.

Reestablishment of the Survey Executed by Adolphe Jessen,
Deputy Surveyor, in 1898.

N. 1° 34' E., bet. secs. 10 and 11.

Over broken and mountainous land through dense mahogany
timber. Asc. about 750 ft. over precipitous and broken
S. slope.

- 26.30 Spur, curves E. from N; asc. 100 ft. over S. slope.
- 44.32 The ¼ sec. cor. of secs. 10 and 11, monumented with a sand-
stone, 22x10x9 ins., firmly set 10 ins. in the ground and
in a mound of stone, plainly mkd. ¼ on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in
the ground to bedrock, and in a mound of stone, 3½ ft.
base to top, with brass cap mkd.

T1S R24E

$\frac{1}{4}$
S10|S11
1972

Place original cor. stone in mound of stone, alongside
iron post.

N. 2° 08' W., beginning new measurement.

Asc. 120 ft. over general S. slope through dense mahogany
and scattered juniper timber.

Dependent Resurvey of
Subdivision T. 1 S. R. 24 E. Salt Lake Mer. Utah

- CHAINS
- 13.85 Ridge, bears E. and W.; desc. about 520 ft. over broken N. slope. Enter pine and aspen timber.
- 30.50 Base of descent, cove, drains N. 65° E.; enter dense mahogany timber; thence along E. slope.
- 37.54 The cor. of secs. 2, 3, 10 and 11, monumented with a sandstone, 18x12x5 ins., firmly set 8 ins. in the ground and in a collar of stone, plainly mkd 5 notches on S. and 2 on E. edges.
- At the cor. point
- Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.
- T1S R24E
- $$\begin{array}{r} S3|S2 \\ \hline S10|S11 \\ 1972 \end{array}$$
- Place original cor. stone in mound of stone alongside iron post.
-
- From the cor. of secs. 1, 2, 11 and 12.
- S. 89° 15' W., bet. secs. 2 and 11.
- Over gently rolling land through sagebrush undergrowth. Along fence line.
- 9.00 Wash, drains S. 45° E.; asc. 80 ft. over E. slope.
- 20.00 Cor. of fences bearing E. and S. asc. 240 ft. over E. slope.
- 39.96 The ¼ sec. cor. of secs. 2 and 11, monumented with a sandstone, 20x12x6 ins., firmly set in a mound of stone, plainly mkd. ¼ on N. face.
- At the cor. point
- Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.
- T1S R24E
- $$\begin{array}{r} \frac{1}{4}S2 \\ \hline S11 \\ 1972 \end{array}$$
- Place original cor. stone in mound of stone alongside iron post.
-
- S. 89° 20' W., beginning new measurement.
- Asc. 160 ft. over rolling E. slope.
- 19.90 Point for the W. 1/16 sec. cor. of secs. 2 and 11.
- Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins in the ground, with brass cap mkd.

Dependent Resurvey of
Subdivision T. 1 S. R. 24 E., Salt Lake Mer., Utah

CHAINS

T1S R24E
W1/16 S2
S11
1972

Raise a mound of stone, 3 ft. base, 1½ ft. high, N. of cor.
Asc. 100 ft. over gently rolling E. slope. Enter scattered
mahogany timber.

36.00 Enter dense mahogany.

39.80 The cor. of secs. 2, 3, 10 and 11.

N. 0° 41' W., bet. secs. 2 and 3.

Over broken and mountainous land through dense mahogany
timber. Asc. about 20 ft. along E. slope.

5.30 Base of ridge, curves S. and E.; asc. about 280 ft. over
broken S. slope.

17.25 Top of ascent, slopes W.; thence along broken and steep
W. slope. Timber becomes scattered.

34.20 Saddle, on broken and ledgy ridge, bears N. 30° W. and S.
30° E.; desc. about 100 ft. along E. slope over large
boulders and rock slide area. Enter scattered aspen
timber.

39.58 Point for the ¼ sec. cor. of secs. 2 and 3, at propor-
tionate dist.; there is no remaining evidence of the
original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., on solid
rock, alongside sloping ledge 10 ft. high, facing E., and
in a mound of stone, 4 ft. base to top, with brass cap
mkd.

T1S R24E
¼
S3|S2
1972

Continue along broken E. slope through large boulders in
rock slide area.

54.30 Leave rock slide area; asc. about 200 ft over broken SE.
slope. Enter dense timber.

63.15 Spur, slopes E.; desc. 480 ft. over steep N. slope.
Timber becomes scattered.

79.26 The closing cor. of secs. 2 and 3, on the Salt Lake Base
Line, monumented with an iron post, 2½ ins. diam., firmly
set in mound of stone, 4 ft. base, 2½ ft. high, with
brass cap mkd.

S3|S2
C C

T1S R24E
1964

42

Dependent Resurvey of
Subdivision, T. 1 S., R 24 E., Salt Lake Mer., Utah

CHAINS

From this point, the stan. cor. of secs. 33 and 34, T. 1 N., R. 24 E., bears S. $89^{\circ} 22'$ W., 5.56 chs. dist., monumented by an iron post, $2\frac{1}{2}$ ins. diam., with brass cap mkd.

SC
T1N R24E
S33|S34
1964

From the same point, the stan. $\frac{1}{4}$ sec. cor. of sec. 34, T. 1 N., R. 24 E., bears N. $89^{\circ} 22'$ E., 34.35 chs. dist., monumented by an iron post, $2\frac{1}{2}$ ins. diam., with brass cap mkd.

SC
T1N R24E
 $\frac{1}{4}$ S34
1964

Reestablishment of the Survey Executed by A. D. Ferron, Deputy Surveyor, in 1879.

From the cor. of secs. 3, 4, 33 and 34, on the S. bdy. of the Tp., hereinbefore described.

N. $1^{\circ} 24'$ E., bet. secs. 33 and 34.

Over rolling land through sagebrush undergrowth.

- 4.50 Trail road, bears N. 75° W. and S. 75° E.
- 13.00 Small wash, drains S. 65° W.; asc. 15 ft. over SE. slope.
- 20.14 Point for the S. $1/16$ sec. cor. of secs. 33 and 34.
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T1S R24E

S1/16
S33|S34
1972

Asc. 40 ft. over SE. slope.

- 23.50 Spur, slopes S. 55° W.; desc. 60 ft. over NW. slope.
- 38.00 Small draw, drains S. 45° W.
- 40.28 Point for the $\frac{1}{4}$ sec. cor. of secs. 33 and 34, at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T1S R24E

 $\frac{1}{4}$
S33|S34
1972

Raise a mound of stone, $2\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

Dependent Resurvey of
Subdivision, T. 1 S., R. 24 E., Salt Lake Mer., Utah

CHAINS

- Asc. 20 ft. over general SW. slope.
- 47.00 Small draw, drains S. 35° W.; asc. 120 ft. over SE. slope.
- 49.00 Trail road, bears N. 28° E. and S. 28° W.
- 59.35 Ridge, bears E. and curves S. 45° W.; desc. 200 ft. over N. slope. Enter patch of dense young aspen.
- 68.00 Leave aspen timber, bears E. and W.
- 72.00 Draw, drains W.; thence along W. slope.
- 80.56 Point for the cor. of secs. 27, 28, 33 and 34, at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T1S R24E

$$\frac{S28|S27}{S33|S34}$$
 1972

Raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor.

From the cor. of secs. 26, 27, 34 and 35.

S. 89° 31' W., bet. secs. 27 and 34.

Over rolling land through sagebrush undergrowth. Asc. about 80 ft. over E. slope.

- 4.50 Improved dirt road, bears N. and S.
- 18.00 Base of ridge, bears N. and S.; asc. about 380 ft. over steep E. slope. Enter dense mahogany timber.
- 39.92 Point for the ¼ sec. cor. of secs. 27 and 34, at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T1S R24E

$$\frac{\frac{1}{4}S27}{S34}$$
 1972

Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.

Asc. about 280 ft. over E. slope.

- 41.65 Trail road, bears N. 7° W. and S. 7° E.; leave timber.
- 50.50 Ridge, bears N. and S.; desc. about 540 ft. over W. slope.
- 79.84 The cor. of secs. 27, 28, 33 and 34.

N. 0° 51' W., bet. secs. 27 and 28.

Over rolling land through sagebrush undergrowth. Asc. about 60 ft. over SW. slope.

Dependent Resurvey of
Subdivision, T. 1 S., R. 24 E., Salt Lake Mer., Utah

CHAINS	
3.20	Fence, bears N. 88° 03' W. and S. 88° 03' E., about 25.00 chs. to end; enter scattered timber.
20.14	Point for the S. 1/16 sec. cor. of secs. 27 and 28. Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd. T1S R24E S1/16 S28 S27 1972 Asc. 10 ft. over SW. slope.
23.00	Spur, slopes W.; desc. about 150 ft. over NW. slope.
40.28	Point for the ¼ sec. cor. of secs. 27 and 28, at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T1S R24E ¼ S28 S27 1972 Raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor. Desc. 20 ft. over gentle NW. slope. Leave timber.
47.00	Base of descent; asc. about 120 ft. over broken and ledgy SW. slope.
55.00	Enter timber.
63.00	Point of broken and ledgy spur, projects S. 45° W.; desc. about 20 ft. over NW. slope.
68.00	Ledgy draw, drains S. 40° W.; asc. about 160 ft. over broken SW. slope.
79.00	Spur, slopes S. 45° W.; thence along W. slope.
80.56	Point for the cor. of secs. 21, 22, 27 and 28, at proportionate dist.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., over a cross (+), on solid sandstone, and in a mound of stone, 4 ft. base to top, with brass cap mkd. T1S R24E S21 S22 S28 S27 1972 from which A ponderosa pine, 20 ins. diam., bears N. 55° 00' E., 59 lks. dist., mkd. T1S R24E S22 BT.

Dependent Resurvey of
Subdivision, T. 1 S., R. 24 E., Salt Lake Mer., Utah

CHAINS

A ponderosa pine, 24 ins. diam., bears S. 56° 45' E.,
94 lks. dist., mkd. T1S R24E S27 BT.

A ponderosa pine, 14 ins. diam., bears S. 1° 00' W.,
22 lks. dist., mkd. T1S R24E S28 BT.

A ponderosa pine, 16 ins. diam., bears N. 47° 45'
W., 113 lks. dist., mkd. T1S R24E S21 BT.

From the cor. of secs. 22, 23, 26 and 27.

S. 89° 35' W., bet. secs. 22 and 27.

Over gently rolling cultivated land.

16.00 Leave cultivated land, bears N. and S.; asc. 60 ft. over
E. slope. Enter mahogany and scattered ponderosa pine
and juniper timber.

20.14 Point for the E. 1/16 sec. cor. of secs. 22 and 27.

Set an iron post, 30 ins. long, 2½ ins. diam., over a
cross (+) on solid rock, and in a mound of stone, 4 ft.
base to top, with brass cap mkd.

T1S R24E

E1/16 $\frac{S22}{S27}$

1972

from which

A ponderosa pine, 22 ins. diam., bears N. 79° 15' E.,
50 lks. dist., mkd. E1/16 S22 BT.

Asc. about 250 ft. over broken NE. slope.

29.00 Broken spur, slopes S. 50° E.; thence along broken S.
slope.

35.00 Head of ledgy draw, drains S. 50° E.; asc. about 300 ft.
over ledgy and precipitous E. slope.

40.28 Point for the ¼ sec. cor. of secs. 22 and 27, at propor-
tionate dist. falls on sloping ledge, 6 ft. high, and
cannot be perpetuated; there is no remaining evidence of
the original cor.

40.35 Point for the witness ¼ sec. cor. of secs. 22 and 27, at
base of ledge, 6 ft. high facing S.

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in
the ground to bedrock, and in a mound of stone, 3 ft.
base to top, with brass cap mkd.

T1S R24E

¼ $\frac{S22 \rightarrow W}{S27 \rightarrow C}$

1972

Asc. about 80 ft. over broken and precipitous E. slope.

44.00 Ridge, bears N. and S.; desc. about 200 ft. over broken
NW. slope. Enter scattered aspen timber.

58.00 Ledgy draw, drains S. 40° W.; desc. along broken S. slope

Dependent Resurvey of
Subdivision, T. 1 S., R. 24 E., Salt Lake Mer., Utah

CHAINS	
64.00	Spur, slopes S. 50° W.; desc. 80 ft. over NW. slope.
70.00	Draw, drains S. 50° W.; asc. 20 ft. over SE. slope.
78.50	Spur, slopes S. 45° W.; desc. 20 ft. over W. slope.
80.56	The cor. of secs. 21, 22, 27 and 28.
	N. 0° 18' W., bet. secs. 21 and 22.
	Over broken mountainous land through mahogany and scattered ponderosa pine, aspen, juniper and fir timber.
	Asc. 20 ft. along W. slope.
3.00	Top of ascent, slopes W.; desc. about 60 ft. over broken NW. slope.
11.00	Ledgy draw, drains S. 60° W.; asc. about 100 ft. over broken SW. slope.
17.00	Head of ledgy draw, drains SW.; asc. about 180 ft. over broken and ledgy S. slope.
28.50	Broken, ledgy spur, projects S. 55° W., from E.; desc. about 40 ft. over NW. slope.
32.00	Head of ledgy draw, drains W.; thence along broken W. slope.
40.27	Point for the $\frac{1}{4}$ sec. cor. of secs. 21 and 22, at proportionate dist.; there is no remaining evidence of the original cor.
	Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., over a cross (+) on solid sandstone, and in a mound of stone, 4 ft. base to top, with brass cap mkd.
	T1S R24E
	$\frac{1}{4}$ S21 S22 1972
	from which
	A ponderosa pine, 8 ins. diam., bears S. 2° 45' W., 43 lks. dist., mkd. X at breast height, and BT at base.
	A ponderosa pine, 10 ins. diam., bears N. 4° 30' W., 16 lks. dist., mkd. $\frac{1}{4}$ S21 BT.
	Continue along broken W. slope.
42.00	Head of rocky draw, drains W.; asc. about 200 ft. over broken SW. slope. Enter dense mahogany.
58.00	Ridge, bears S. 50° E. and N. 50° W. curving W.; desc. over gentle NE. slope.
62.00	Top of vertical ledge, 75 ft. high, bears S. 50° E. and curves W.; desc. about 580 ft. over steep and broken NE. changing to N. slope.
80.54	Point for the cor. of secs. 15, 16, 21 and 22, at proportionate dist.; there is no remaining evidence of the original cor.

Dependent Resurvey of
Subdivision T. 1 S. R. 24 E., Salt Lake Mer., Utah

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

T1S R24E

$\frac{S16|S15}{S21|S22}$
1972

from which

A pine, 10 ins. diam., bears N. 70° 00' E., 30 lks. dist., mkd. T1S R24E S15 BT.

A pine, 8 ins. diam., bears S. 10° 00' E., 17 lks. dist., mkd. T1S R24E S22 BT.

A pine, 6 ins. diam., bears S. 70° 00' W., 19 lks. dist., mkd. T1S R24E S21 BT.

A pine, 8 ins. diam., bears N. 59° 00' W., 26½ lks. dist., mkd. T1S R24E S16 BT.

From the cor. of secs. 14, 15, 22 and 23.

N. 89° 05' W., bet. secs. 15 and 22.

Over gently rolling cultivated land, along fence line. Along S. side of improved dirt road.

7.00 Calder ditch, 10 lks. wide, 2 ft. deep, drains N. 32° E., from nearly W.

40.41 Point for the ¼ sec. cor. of secs. 15 and 22, at cor. of fence, turns S. 6° 00' W. According to a statement by Zelph Calder, life long resident and adjoining land owner, this point is a perpetuation of the original ¼ sec. cor. point, and is accepted as the best available evidence of the position of the original ¼ sec. cor.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T1S R24E
 $\frac{1}{4} \frac{S15}{S22}$
1972

S. 88° 14' W., beginning new measurement.

Continue over gently rolling land through sagebrush undergrowth, and along S. side of improved dirt road. Leave cultivated land.

11.00 Road turns to N. 50° W.; asc. 20 ft. over NE. slope.

15.00 Calder Ditch, 10 lks. wide, 3 ft. deep, drains S. 55° E.; asc. 60 ft. over NE. slope. Enter scattered timber.

20.26 Point for the W. 1/16 sec. cor. of secs. 15 and 22.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

Dependent Resurvey of
 Subdivision, T. 1 S., R. 24 E., Salt Lake County, Utah

CHAINS

T1S R24E

W1/16 $\frac{S15}{S22}$
 1972

- Raise a mound of stone, 2½ ft. base, 1½ ft. high, N. of cor.
- Asc. about 320 ft. over NE. slope.
- 23.00 Enter dense timber.
- 40.52 The cor. of secs. 15, 16, 21 and 22.

N. 2° 06' W., bet. secs. 15 and 16.

Over mountainous land through dense timber. Desc. about 320 ft. over steep NE. slope.

- 16.50 Calder Ditch, 10 lks. wide, 3 ft. deep, drains S. 62° E., at base of steep descent; desc. 20 ft. over gentle NE. slope. Leave timber.
- 20.15 Point for the S. 1/16 sec. cor. of secs. 15 and 16.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T1S R24E

S1/16
 S16|S15
 1972

from which

A local 1/16 sec. cor. point, bears S. 80° 34' W., 0.81 chs. dist., monumented with a cedar post, 5 ins. diam., 6 ft. above ground.

Desc. 100 ft. over N. slope.

- 27.50 Improved dirt road, bears N. 63° W. and S. 63° E.
- 31.50 Pot Creek, 10 lks. wide, 12 ins. deep, flows E.; asc. about 80 ft. over broken SW. slope. Enter timber.
- 40.30 The ¼ sec. cor. of secs. 15 and 16 as determined from the only remaining original bearing tree:

A ponderosa pine, 24 ins. diam., bears S. 15° 00' W., 29 lks. dist., mkd. ¼ S. BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., over a cross (+) on solid sandstone, and in a mound of stone, 5 ft. base to top, with brass cap mkd.

T1S R24E

¼
 S16|S15
 1972

Dependent Resurvey of
Subdivision, T. 1 S., R. 24 E., Salt Lake Mer., Utah

CHAINS

from which

A ponderosa pine, 12 ins. diam., bears S. 65° 15' E.,
72 lks. dist., mkd. $\frac{1}{4}$ S15 BT.

N. 0° 12' E., beginning new measurement.

Asc. about 380 ft. over broken SW. slope.

17.94 Original line tree, a dead Ponderosa Pine, 3 ft. diam.
mkd. 2 hacks on N. and S. sides.

32.00 Spur, slopes S. 70° W.; desc. about 200 ft. over broken
NW. slope.

40.16 The cor. of secs. 9, 10, 15 and 16, monumented with a
quartzite boulder, 5x5x4 ft. above ground, dimly mkd. 3
grooves on E. face.

On N. side of corner stone, N. 0° 30' W., 0.03 chs. of
true point.

Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins.
in the ground to bedrock, and in a mound of stone, 2½ ft.
base to top, with brass cap mkd.

T1S R24E

S9 S10
S16 ↓ S1
W C
1972

From the cor. of secs. 10, 11, 14 and 15.

S. 88° 54' W., bet. secs. 10 and 15.

Over mountainous land through dense mahogany timber.
Along S. slope.

1.95 Trail road, curves N. 50° W. from S. 20° E.

6.00 Draw, drains S. 45° E.; asc. 140 ft. over E. slope. Tim-
ber becomes scattered.

17.00 Base of broken ascent; asc. about 400 ft. over broken
and precipitous NE. slope.

23.70 Top of ledge, 50 ft. high, on ridge, bears N. 25° W. and
S. 25° E.; desc. 30 ft. over SW. slope. Enter dense
timber.

26.50 Shallow, rocky draw, drains S.; asc. about 50 ft. over
SE slope.

30.85 Top of ascent, slopes S.; desc. about 80 ft. over rocky
SW. slope.

40.52 Point for the $\frac{1}{4}$ sec. cor. of secs. 10 and 15, at propor-
tionate dist.; there is no remaining evidence of the
original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in
the ground to bedrock, and in a mound of stone, 4 ft. base
to top, with brass cap mkd.

Dependent Resurvey of
Subdivision, T. 1 S., R. 24 E., Salt Lake Mer., Utah

CHAINS

T1S R24E

$\frac{1}{4}$ $\frac{S10}{S15}$
1972

- Desc. 40 ft. over rocky SW. slope.
- 43.70 Shallow draw, near head, drains S.; asc. 50 ft. over broken SE. slope.
- 51.10 Ridge, bears N. 40° E. and S. 40° W.; desc. 200 ft. over broken NW. slope. Enter pine and aspen timber.
- 60.78 Point for the W. 1/16 sec. cor. of secs. 10 and 15.
- Set and iron post, 30 ins. long, 2½ ins. diam., 14 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T1S R24E

W1/16 $\frac{S10}{S15}$
1972

- Desc. about 200 ft. over broken NW. slope.
- 81.04 The cor. of secs. 9, 10, 15 and 16.
-
- N. 0° 30' W., bet. secs. 9 and 10.
- Over mountainous land through medium timber. Desc. 80 ft. over NW. slope.
- 0.03 The witness cor. of secs., 9, 10, 15 and 16, hereinbefore described.
- 4.00 Leave timber, bears E. and W.
- 8.00 Draw, drains S. 65° W.; asc. 40 ft. over gentle SE. slope.
- 11.00 Trail road, bears S. 78° W. and curves E. about 10.00 chs. to small pond and spring.
- 20.24 Point for the S. 1/16 sec. cor. of secs. 9 and 10.
- Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T1S R24E

S1/16
S9|S10
1972

from which

A spring of fresh water, (nearly dry), bears S. 55° E., about 12.50 chs. dist.

- Asc. about 360 ft. over broken SE. slope. Enter medium dense timber.
- 32.00 Rocky spur, slopes S. 30° W. from N. 15° E.; asc. 80 ft. over broken SW. slope. Enter dense timber.

Dependent Resurvey of
Subdivision, T. 1 S., R. 24 E., Salt Lake Mer., Utah

CHAINS
40.48

Point for the $\frac{1}{4}$ sec. cor. of secs. 9 and 10, at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T1S R24E

$\frac{1}{4}$
S9|S10
1972

Asc. about 340 ft. over broken SW. slope through dense mahogany timber.

68.50 Top of ascent, on W. edge of high mountain; desc. about 440 ft. over broken N. slope. Enter dense pine timber.

80.96 Point for the cor. of secs. 3, 4, 9 and 10, at proportionate dist. falls at S. end of rock slide; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins. in rock slide, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T1S R24E

$\frac{S4}{S9}$ |S3
1972

Reestablishment of the Survey Executed by Adolphe Jessen Deputy Surveyor, in 1898.

From the cor. of secs. 2, 3, 10 and 11.

S. $88^\circ 18'$ W., bet. secs. 3 and 10.

Over broken mountain land through dense mahogany timber. By triangulation, asc. about 360 ft. over broken SE. slope.

16.50 Ridge, bears N. 50° E. and curves W. End traingulation; asc. 80 ft. along N. slope.

28.30 Spur, slopes N.; desc. 160 ft. over broken NW. slope. Enter aspen, pine and spruce timber.

40.74 Point for the $\frac{1}{4}$ sec. cor. of secs. 3 and 10, at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T1S R24E

$\frac{S3}{S10}$
 $\frac{1}{4}$
1972

Dependent Resurvey of
Subdivision, T. 1 S., R. 24 E., Salt Lake Mer., Utah

CHAINS	
	from which A spruce, 5 ins. diam., bears N. 80° 00' E., 11 lks. dist., mkd. $\frac{1}{4}$ S3 BT.
41.50	Draw, drains N.; asc. 120 ft. over steep NE. slope.
50.60	Spur, slopes N.; thence by triangulations, desc. about 400 ft. over steep and broken NW. slope.
71.50	Base of descent, slopes N.; asc. about 40 ft. along N. slope.
81.48	The cor. of secs. 3, 4, 9 and 10.
Reestablishment of the Survey Executed by A. D. Ferron, Deputy Surveyor, in 1879.	
	N. 0° 06' E., bet. secs. 3 and 4.
	Over broken mountain land. Desc. about 140 ft. over steep and broken NW. slope over rock slide area.
1.50	End rock slide, enter dense timber, bears E. and SW.
7.00	Base of steep descent, shallow draw, drains N. 50° W.; thence along W. slope. Leave timber, bears E. and W.
20.24	Point for the S. 1/16 sec. cor. of secs. 3 and 4. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T1S R24E S1/16 S4 S3 1972
	Raise a mound of stone, 3 ft. base, 1½ ft. high, W. of cor.
	Desc. about 60 ft. over NW. slope.
27.00	Spur, slopes N. 45° W.; desc. about 140 ft. over N. slope.
40.48	Point for the $\frac{1}{4}$ sec. cor. of secs. 3 and 4, at proportionate dist. falls in flat draw draining W.; there is no remaining evidence of the original cor. Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd. T1S R24E $\frac{1}{4}$ S4 S3 1972
	Over rolling land through dense sagebrush.
41.90	Trail road, bears E. and W.
54.00	Draw, drains S. 55° W.; asc. about 120 ft. over SE. slope.

Dependent Resurvey of
Subdivision, T. 1 S., R. 24 E., Salt Lake Mer., Utah

CHAINS
80.00

cur, slopes S. 30° W.; thence over gentle NW. slope.

80.90

closing cor. of secs. 3 and 4, on the Salt Lake Base Line, monumented with an iron post, 2½ ins. diam., firmly set in a mound of stone, 3 ft. base, 2½ ft. high, with brass cap mkd.

S4|S3
C C
T1S R24E
1964

From this point, the stan. cor. of secs. 32 and 33, T. 1 N., R. 24 E., bears S. 89° 22' W., 5.49 chs. dist., monumented by an iron post, 2½ ins. diam., with brass cap mkd.

SC
T1N R24E
S32|S33
1964

From the same point, the stan. ¼ sec. cor. of sec. 33, T. 1 N., R. 24 E., bears N. 89° 22' E., 34.42 chs. dist., monumented by an iron post, 2½ ins. diam., with brass cap mkd.

SC
T1N R24E
¼ S33
1964

From the cor. of secs. 4, 5, 32 and 33, on the S. bdy. of the Tp., hereinbefore described.

N. 2° 27' E., bet. secs. 32 and 33.

Over rolling land through sagebrush undergrowth, along a fence line. Asc. 80 ft. along general E. slope.

35.00

Wash, drains N. 75° E.

40.36

Point for the ¼ sec. cor. of secs. 32 and 33, at cor. of fences, from S. and E. This point is harmoniously related to existing original corners, and is accepted as the best existing evidence of the position of the original cor.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T1S R24E
¼
S32|S33
1972

N. 2° 27' E., beginning new measurement.

Over gently rolling land.

1.70

Trail road, bears N. 82° W. and S. 82° E.

Dependent Resurvey of
Subdivision, T. 1 S., R. 24 E., Salt

CHAINS	
27.00	Wash, drains S. 60° E. curving E.
39.94	<p>The cor. of secs. 28, 29, 32 and 33, monumented with a quartzite stone, 16x12x4 ins., firmly set 6 ins. in the ground, and dimly mkd. 1 notch on S. and 4 on E. edges.</p> <p>At the cor. point</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T1S R24E</p> <p style="text-align: center;"> $\begin{array}{r} \underline{S29 S28} \\ S32 S33 \\ 1972 \end{array}$ </p> <p>Bury original cor. stone alongside iron post.</p>
19.92	<p>From the cor. of secs. 27, 28, 33 and 34.</p> <p>S. 89° 27' W., bet. secs. 28 and 33.</p> <p>Over gently rolling land through sagebrush undergrowth. Desc. about 80 ft. over general W. slope.</p> <p>Point for the E. 1/16 sec. cor. of secs. 28 and 33.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T1S R24E</p> <p style="text-align: center;"> $\begin{array}{r} \underline{E1/16 S28} \\ S33 \\ 1972 \end{array}$ </p> <p>Desc. about 40 ft. over general W. slope.</p>
39.84	<p>Point for the ¼ sec. cor. of secs. 28 and 33, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T1S R24E</p> <p style="text-align: center;"> $\begin{array}{r} \underline{\frac{1}{4} S28} \\ S33 \\ 1972 \end{array}$ </p> <p>Raise a mound of stone, 2½ ft. base, 1½ ft. high, N. of cor.</p> <p>Desc. 10 ft. over W. slope.</p>
41.60	Shallow, rocky wash, 15 lks. wide, 1 ft. deep, drains irregularly N.; asc. about 80 ft. over gently rolling E. slope.
45.00	Trail road, bears N. 18° W. and S. 18° E.
53.00	Wash, 10 lks. wide, 2 ft. deep, in small draw, drains irregularly N. 53° E.

Dependent Resurvey of
Subdivision T. 1 S.. R. 24 E. Salt Lake Mer. Utah

CHAINS

79.68

The cor. of secs. 28, 29, 32 and 33.

N. 1° 04' W., bet. secs. 28 and 29.

Over gently rolling land through sagebrush undergrowth.

6.40

Fence, bears N. 88° 00' W. and S. 88° 00' E., with trail road along S. side.

26.00

Trail road, bears N. 49° W. and S. 49° E.

40.38

Point for the $\frac{1}{4}$ sec. cor. of secs. 28 and 29, at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T1S R24E

$\frac{1}{4}$

S29|S28

1972

Raise a mound of stone, $2\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

48.30

Same trail road, bears S. 42° W. and curves N. 20° E.

80.76

Point for the cor. of secs. 20, 21, 28 and 29, at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T1S R24E

S20|S21

S29|S28

1972

From the cor. of secs. 21, 22, 27 and 28.

S. 89° 34' W., bet. secs. 21 and 28.

Over broken mountainous land through dense timber. Desc. about 240 ft. over broken W. slope.

13.00

Rocky draw, drains S.; asc. about 60 ft. over broken and ledgy SE. slope.

19.00

Point of ledgy spur, projects S.; desc. about 40 ft. over broken SW. slope.

22.50

Head of rocky draw, drains S.; asc. about 50 ft. over broken SE. slope.

26.50

Spur, slopes S.; desc. about 20 ft. along S. slope.

30.00

Top of ledge, 10 ft. high, on point of ledgy spur, projects S. 60° W.; desc. about 140 ft. over broken NW. slope.

38.00

Base of broken spur, bears NE. and SW.; thence over exposed sandstone through scattered timber.

Dependent Resurvey of
Subdivision T. 24 N., R. 24 E., S. 1/4 Sec. 21 and 28

CHAINS	
40.00	<p>Point for the $\frac{1}{4}$ sec. cor. of secs. 21 and 28, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 8 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.</p> <p style="text-align: center;">T1S R24E</p> <p style="text-align: center;">$\frac{S21}{\frac{1}{4} S28}$ 1972</p> <p>from which</p> <p style="padding-left: 40px;">A ponderosa pine, 30 ins. diam., bears S. $6^{\circ} 30'$ W., 8 lks. dist., mkd. $\frac{1}{4}$ S28 BT.</p> <p style="padding-left: 40px;">A ponderosa pine, 10 ins. diam., bears N. $5^{\circ} 00'$ W., 39 lks. dist., mkd. $\frac{1}{4}$ S21 BT.</p> <p>Over gently rolling land through scattered timber.</p>
43.00	Leave timber, bears N. and S.; enter dense sagebrush.
56.00	Junction of wash, 15 lks. wide, 3 ft. deep, from N. 50° E., with wash, 15 lks. wide, 4 ft. deep, draining irregularly N. 20° W. from S. 20° E.
60.00	<p>Point for the W. $1/16$ sec. cor. of secs. 21 and 28.</p> <p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T1S R24E</p> <p style="text-align: center;">$\frac{S21}{W1/16 S28}$ 1972</p>
63.00	Junction of trail road from N. 70° E., with trail road bearing N. 67° W. and S. 67° E.
70.00	Trail road, bears N. 20° W. and S. 20° E.
74.00	Trail road, bears N. 4° E. and S. 4° W.
80.00	The cor. of secs. 20, 21, 28 and 29.
	<p>N. $1^{\circ} 26'$ W., bet. secs. 20 and 21.</p> <p>Over gently rolling land through sagebrush undergrowth.</p>
16.50	Trail road, bears N. 45° W. and S. 45° E.
23.50	Trail road, bears N. 53° E. and S. 53° W.
38.00	Trail road, bears N. 15° W. and S. 15° E.
40.38	<p>Point for the $\frac{1}{4}$ sec. cor. of secs. 20 and 21, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground, with brass cap mkd.</p>

Dependent Resurvey of
Subdivision, T. 1 S., R. 24 E., Salt Lake Mer., Utah

CHAINS

T1S R24E

$\frac{1}{4}$
S20|S21
1972

Raise a mound of stone, $2\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

Desc. 60 ft. over NE. slope.

57.00 Draw, drains N. 30° W.; asc. 50 ft. over SW. slope. Enter scattered timber.

60.57 Point for the N. $1/16$ sec. cor. of secs. 20 and 21.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T1S R24E

N1/16
S20|S21
1972

64.00 Top of ascent, slopes W.; desc. 50 ft. over NW. slope.

70.00 Same draw, drains N. 30° E.; asc. 50 ft. over SE. slope. Leave scattered timber.

80.50 Trail road, bears N. 30° E. and S. 30° W.

80.76 Point for the cor. of secs. 16, 17, 20 and 21, at cor. of fences extending S. 57° E. and N. $0^\circ 12'$ W. This point has long been recognized by local land owners as the cor. point, and is accepted as the best existing evidence of the position of the original cor.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T1S R24E

$\frac{S17|S16}{S20|S21}$
1972

From the cor. of secs. 15, 16, 21 and 22.

S. $89^\circ 47'$ W., bet. secs. 16 and 21.

Over mountainous land through dense timber. Asc. 40 ft. over steep NE. slope.

6.50 Top of ascent, slopes N.; desc. 40 ft. along steep and broken N. slope.

40.77 Point for the $\frac{1}{4}$ sec. cor. of secs. 16 and 21, at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

Dependent Resurvey of
Subdivision, T. 1 S., R. 24 E., Salt Lake Mer., Utah

CHAINS

T1S R24E

$\frac{1}{4}$ $\frac{S16}{S21}$
1972

from which

A pine, 7 ins. diam., bears N. 10° 00' E., 11½ lks. dist., mkd. $\frac{1}{4}$ S16 BT.

A pine, 5 ins. diam., bears S. 75° 00' W., 7½ lks. dist., mkd. $\frac{1}{4}$ S21 BT.

Raise a mound of stone, 3 ft. base, 1½ ft. high, N. of cor.

Desc. 20 ft. along steep N. slope.

53.50 Desc. 300 ft. over steep NW. slope.

61.50 Leave dense timber, bears NE. and SW.; enter sagebrush and serviceberry.

76.50 Draw, drains N. 30° E.; asc. 50 ft. over SE. slope.

81.40 Trail road, bears N. 30° E. and S. 30° W.

81.54 The cor. of secs. 16, 17, 20 and 21.

N. 0° 12' W., bet. secs. 16 and 17.

Over rolling land along fence line, through sagebrush undergrowth. Desc. 40 ft. over NW. slope.

7.70 Draw, drains N. 40° E.; asc. 60 ft. over SE. slope.

21.70 Spur, slopes N. 70° E.; desc. 40 ft. over gentle NE. slope.

40.18 The $\frac{1}{4}$ sec. cor. of secs. 16 and 17, monumented with a sandstone, 12x6x6 ins., firmly set 6 ins in the ground, in fence line, plainly mkd. $\frac{1}{4}$ on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins in the ground, and in a collar of stone, with brass cap mkd.

T1S R24E

$\frac{1}{4}$
S17|S16
1972

Bury original cor. stone alongside iron post.

N. 0° 16' E., beginning new measurement.

Desc. 40 ft. over gentle NE. slope, along E. side of fence line.

20.15 Cor. of fences, bears West, 0.27 chs. dist. Fences extending S. 0° 30' E. and S. 88° 30' W.

Dependent Resurvey of
Subdivision, T. 1 S., R. 24 E., Salt Lake Mer., Utah

CHAINS

- 33.75 Calder Ditch, 10 lks. wide, 3 ft. deep, drains S. 20° E.; thence over gently rolling land.
- 39.50 Improved dirt road, bears N. 32° 45' W. and S. 32° 45' E.
- 39.78 The cor. of secs. 8, 9, 16 and 17, monumented with a quartzite stone, 14x12x6 ins., firmly set 6 ins. in the ground, and plainly mkd. with 4 notches on S. & E. edges.
- At the cor. point
- Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
- T1S R24E
- $\frac{S8|S9}{S17|S16}$
1972
- Bury original cor. stone alongside the iron post, and raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor.
-
- From the cor. of secs. 9, 10, 15 and 16.
- N. 89° 59' W., bet. secs. 9 and 16.
- Over mountainous land through scattered timber. Desc. 120 ft. over NW. slope.
- 10.00 Base of steep descent, bears NE. and SW.; leave timber, desc. 80 ft. over gentle NW. slope.
- 27.00 Wash, drains S. 30° W.
- 30.50 Pot Creek, 10 lks. wide, 12 ins. deep, flows irregularly S. 20° W.; thence over gently rolling land.
- 40.41 The ¼ sec. cor. of secs. 9 and 16, monumented with a cobblestone, 16x8x3 ins., firmly set 10 ins. in the ground, and in a small mound of stone, plainly mkd. ¼ on N. face.
- At the cor. point
- Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.
- T1S R24E
- $\frac{S9}{\frac{1}{4} S16}$
1972
- Bury original cor. stone alongside iron post.
-
- S. 89° 18' W., beginning new measurement.
- 1.65 Trail road, bears N. 12° E. and S. 12° W.
- 39.92 The cor. of secs. 8, 9, 16 and 17.

N. 0° 54' W., bet. secs. 8 and 9.

Dependent Resurvey of
Subdivision T. 1 S. R. 24 E. Salt Lake Mer. Utah

CHAINS	
	Over rolling land through sagebrush undergrowth. Desc. 40 ft. over gentle N. slope.
22.80	Pot Creek, 10 lks. wide, 12 ins. deep, flows irregularly E.; asc. 80 ft. over SE. slope.
25.20	Wash, drains SE.
40.60	The ¼ sec. cor. of secs. 8 and 9, monumented with a quartzite stone, 10x6x6 ins., firmly set 5 ins. in the ground, and plainly mkd. ¼ on W. face.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.
	T1S R24E
	¼ S8 S9 1972
	Bury original cor. stone alongside iron post.

	N. 1° 52' W., beginning new measurement.
	Asc. 50 ft. over SW. slope.
13.15	Trail road, bears N. 45° W. and S. 45° E.
16.00	Spur, slopes S. 45° E.; desc. 60 ft. over NE. slope.
20.43	Point for the N. 1/16 sec. cor. of secs. 8 and 9.
	Set an iron post, 30 ins., long, 2½ ins. diam., 20 ins. in the ground, with brass cap mkd.
	T1S R24E
	N1/16 S8 S9 1972
	Raise a mound of stone, 3 ft. base, 1½ ft. high, W. of cor.
40.86	The cor. of secs. 4, 5, 8 and 9, monumented with a quartzite stone, 12x10x10 ins., firmly set 6 ins. in the ground, and plainly mkd. 5 notches on S. and 4 on E. edges.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, with brass cap mkd.
	T1S R24E
	S5 S4 S8 S9 1972
	Bury original cor. stone alongside iron post, and raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of cor.
	From the cor. of secs. 3, 4, 9 and 10.

Dependent Resurvey of
Subdivision T. 1 S. R. 2 E. S. 4

CHAINS

. 89° 08' W., bet. secs. 4 and 9.

Over mountainous land. Desc. about 400 ft. over steep and rocky NW. slope, over rock slide area.

3.00 Leave rock slide, enter dense timber.

15.00 Leave dense timber, bears NE. and SW.

27.00 Base of steep descent, bears nearly N. and S.; thence over gently rolling land. Evidence of old abandoned fence line bears nearly W.

38.00 Trail road, bears N. and S.

39.00 Wash, drains S.

40.65 New fence, bears N. and S. 0.10 chs. to cor., thence S. 73° 20' E.

40.67 Point for the 1/4 sec. cor. of secs. 4 and 9, at cor. of old abandoned fence line, bears nearly N. and W. This position is harmoniously related to existing original cors., and is accepted as the best existing evidence of the position of original cor.

At the cor. point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.

T1S R24E

S4
S9
1972

S. 89° 20' W., beginning new measurement.

Over gently rolling land, along N. side of ditch, drains nearly E. from W.

14.00 Ditch, 5 lks. wide, 1 ft. deep, drains nearly E. from S. 60° W.

29.00 NE. cor. of earth dam of stock pond, extends S. 50° W., pond extends N. 55° W. about 2.50 chs.

40.94 The cor. of secs. 4, 5, 8 and 9.

N. 0° 50' E., bet. secs. 4 and 5.

Over rolling land through sagebrush undergrowth.

12.00 Draw, drains S. 67° E.; asc. 40 ft. over SW. slope

19.90 Point for the S. 1/16 sec. cor. of secs. 4 and 5, on spur, slopes SE.

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.

T1S R24E
S1/16
S5|S4
1972

Dependent Resurvey of
Subdivision T. 1 S., R. 24 E., Salt Lake Mer., Utah

CHAINS	
	Raise a mound of stone, 3 ft. base, 1½ ft. high, W. of cor.
	Desc. 20 ft. over NE. slope.
26.00	Draw, drains S. 40° E.; asc. 100 ft. over broken SW. slope.
39.78	Point for the witness ¼ sec. cor. of secs. 4 and 5, on top of near vertical ledge, 10 ft. high, faces NW.
	Set an iron post, 30 ins. long, 2½ ins. diam., over a cross (+) on solid sandstone, and in a mound of stone, 3 ft. base to top, with brass cap mkd.
	T1S R24E ¼ W C S5↑S4 1972
39.80	Point for the ¼ sec. cor. of secs. 4 and 5, at proportionate dist. falls on face of near vertical ledge and cannot be perpetuated; there is no remaining evidence of the original cor.
	Asc. 80 ft. along broken W. slope.
65.00	Rocky draw, drains S. 15° W.; asc. 140 ft. over SE. slope. Enter dense mahogany timber.
80.02	Point for the closing cor. of secs. 4 and 5, on the Salt Lake Base Line, as determined from a scattered mound of stone, 5 ft. base, 1 ft. high. This point agrees with the 1964 resurvey bearing and dist. from the standard cor. of secs. 31 and 32, T. 1 N., R. 24 E., and is accepted as the best existing evidence of the position of the original cor.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 3 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.
	T1N R24E S5 S4 C C T1S R24E 1972
	From this cor., the standard cor. of secs. 31 and 32, T. 1 N., R. 24 E., bears S. 89° 27' W., 5.25 chs. dist., monumented with an iron post, 2½ ins. diam., firmly set in a mound of stone, 4 ft. base to top, with brass cap mkd.
	SC T1N R24E S31 S32 1964

Dependent Resurvey of
Subdivision, T. 1 S., R. 24 E., Salt Lake Mer., Utah

CHAINS

From the same point, the stan. $\frac{1}{4}$ sec. cor. of sec. 32, T. 1 N., R. 24 E., bears N. $89^{\circ} 27'$ E., 34.86 chs. dist., monumented by an iron post, $2\frac{1}{2}$ ins. diam., with brass cap mkd.

SC
T1N R24E
 $\frac{1}{4}$ S32
1964

Reestablishment of the Survey Executed by Adolphe Jessen, Deputy Surveyor, in 1898.

From the cor. of secs. 5, 6, 31 and 32, on the S. bdy. of the Tp., hereinbefore described.

N. $5^{\circ} 04'$ E., bet. secs. 31 and 32.

Over mountainous land through sagebrush undergrowth. Asc. 260 ft. over SE. slope.

30.00 Ridge, bears N. 50° E. and S. 50° W.; desc. 40 ft. over NW. slope.

41.00 Head of draw, drains S. 45° W.; asc. 20 ft. over S. slope.

46.50 Spur, slopes W.; thence along W. slope.

48.44 The $\frac{1}{4}$ sec. cor. of secs. 31 and 32, monumented with a limestone, $20 \times 18 \times 4$ ins., firmly set 10 ins. in the ground and plainly mkd. $\frac{1}{4}$ on W. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T1S R24E

$\frac{1}{4}$
S31|S32
1972

Bury original cor. stone alongside iron post, and raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

N. $0^{\circ} 58'$ W., beginning new measurement.

Desc. 60 ft. over NW. slope.

11.00 Draw, drains W.; asc. 40 ft. over SW. slope.

15.00 Spur, slopes W.; thence along broken W. slope.

22.00 Trail road, bears N. 65° W. and S. 65° E.

30.00 Head of draw, drains S. 80° W.; asc. 80 ft. over SW. slope.

40.00 Spur, slopes S. 75° W.; thence along W. slope.

Dependent Resurvey of
Subdivision, R. 1 S., R. 24 E., Salt Lake Mer., Utah

CHAINS 40.46	The cor. of secs. 29, 30, 31 and 32, monumented with a limestone, 24x8x6 ins., firmly set 12 ins. in the ground, and plainly mkd. 1 notch on S. and 5 on E. edges.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.
	T1S R24E
	$\frac{S30 S29}{S31 S32}$ 1972
	Bury original cor. stone alongside iron post.
	From the cor. of secs. 28, 29, 32 and 33.
	N. 84° 30' W., bet. secs. 29 and 32.
	Over rolling land through sagebrush undergrowth. Asc. 80 ft. over SE. slope.
27.00	Shallow draw, drains S. 65° E.; asc. 60 ft. over NE. slope.
40.50	Point for the ¼ sec. cor. of secs. 29 and 32, at proportionate dist.; there is no remaining evidence of the original cor.
	Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T1S R24E
	$\frac{\frac{1}{4} S29}{S32}$ 1972
	Asc. 240 ft. over steep NE. slope.
55.00	Spur, slopes S. 50° E.; thence along S. slope.
63.00	Head of draw, drains S. 25° E.; asc. 40 ft. over E. slope.
68.00	Spur, slopes S.; desc. 120 ft. over SW. slope.
81.00	The cor. of secs. 29, 30, 31 and 32.
	S. 89° 50' W., bet. secs. 30 and 31.
	Over mountainous land through sagebrush undergrowth. Desc. 220 ft. over NW. slope.
25.50	Draw, drains S. 45° W.; thence along S. slope.
39.97	The ¼ sec. cor. of secs. 30 and 31, on spur, slopes S. 55° W., monumented with a limestone, 24x12x6 ins., firmly set 6 ins. in the ground, and plainly mkd. ¼ on N. face.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

Dependent Resurvey of
Subdivision, T. 1 S. R. 24 E., Salt Lake Mer., Utah

CHAINS

T1S R24E

$\frac{1}{4}$ $\frac{S30}{S31}$
1972

Deposit original cor. stone in mound of stone, alongside iron post.

S. 78° 23' W., beginning new measurement.

Desc. 60 ft. over NW. slope.

- 8.00 Wash, drains S. 40° E. from about N. 30° E.; thence over gently rolling land.
- 19.50 Trail road, bears S. 58° E. and N. 58° W. curving W.
- 38.40 Trail road, bears N. and S.
- 42.17 The cor. of secs. 25, 30, 31 and 36, on the W. bdy. of the Tp., hereinbefore described.

From the cor. of secs. 29, 30, 31 and 32.

N. 0° 48' W., bet. secs. 29 and 30.

Over mountainous land through sagebrush undergrowth, along W. slope.

- 0.95 Cor. of fence, bears East 0.05 chs. dist., with fences extending S. 88° E. and N. 2° E.
- 6.00 Head of draw, drains S. 75° W.; asc. 100 ft. over S. slope.
- 14.00 Spur, slopes S. 65° W.; desc. 20 ft. along W. slope.
- 19.00 Draw, drains S. 50° W.
- 19.99 Point for the S. 1/16 sec. cor. of secs. 29 and 30.

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, and in a collar of stone, with brass cap mkd.

T1S R24E

S1/16
S30|S29
1972

Cor. located 1.00 ch. W. of fence extending about N. 2° E. and S. 2° W.

Asc. 260 ft. over steep SW. slope.

- 36.00 Spur, slopes S. 50° W.; desc. about 20 ft. along W. slope.
- 39.98 The $\frac{1}{4}$ sec. cor. of secs. 29 and 30, monumented with a lime stone, 22x12x6 ins., firmly set 6 ins. in the ground, and plainly mkd. $\frac{1}{4}$ on W. face.

At the cor. point

Dependent Resurvey of
Subdivision, T. 1 S., R. 24 E., Salt Lake Mer., Utah

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 3½ ft. base to top, with brass cap mkd.

T1S R24E

½
S30|S29
1972

Deposit original cor. stone in mound of stone, alongside iron post.

Cor. located 1.75 chs. W. of fence, extends about N. 2° E. and S. 2° W.

N. 0° 48' W., beginning new measurement.

Asc. 40 ft. along W. slope.

16.00 Head of draw, drains S. 40° W.; asc. 60 ft. over SW. slope.

18.50 Spur, slopes S. 70° W., on N. end of knoll; desc. 20 ft. over NW. slope.

19.77 Point for the N. 1/16 sec. cor. of secs. 29 and 30.

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T1S R24E

N1/16
S30|S29
1972

Desc. 440 ft. over steep NW. slope. Enter dense mahogany timber.

20.12 Fence, bears W. and E. 2.50 chs., thence about S. 2° W.

39.54 The cor. of secs. 19, 20, 29 and 30, monumented with a sandstone, 16x10x4 ins., firmly set 6 ins. in the ground, and plainly mkd. 2 notches on S. and 5 on E. edges.

At the cor point

Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T1S R24E

S19|S20
S30|S29
1972

Deposit original cor. stone in mound of stone, alongside iron post.

From this cor., U. S. G. S. triangulation station "LANSON" bears S. 15° 27' E., 29.66 chs. dist., monumented with a standard brass tablet, 3 ins. diam., set flush with the ground, mkd. LANSON, 8488 FT. 1949.

From the cor. of

Dependent Resurvey of
Subdivision, T. 1 S., R. 24 E., Salt Lake Mer., Utah

CHAINS

1. 85° 21' W., bet. secs. 20 and 29.

Over mountainous land through sagebrush undergrowth. Asc. 120 ft. over rolling NE. slope.

40.25 Point for the $\frac{1}{4}$ sec. cor. of secs. 20 and 29, at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T1S R24E

$\frac{1}{4}$ $\frac{S20}{S29}$
1972

Asc. 50 ft. over NE. slope.

54.50 Head of draw, drains N. 40° E.; asc. 220 ft. over steep E. slope. Enter timber.

72.50 N. slope of saddle, on ridge, bears N. 15° E. and S. 15° W.; desc. 40 ft. over NW. slope.

80.50 The cor. of secs. 19, 20, 29 and 30.

S. 89° 08' W., bet. secs. 19 and 30.

Over mountainous land through aspen, pine and mahogany timber. Desc. 220 ft. over NW. slope.

20.30 Leave timber, bears N. and S.

30.30 Wash, at base of ridge, drains S. 30° W.; asc. 20 ft. over gentle SE. slope.

40.30 The $\frac{1}{4}$ sec. cor. of secs. 19 and 30, monumented with a limestone, 12x12x6 ins., firmly set 6 ins. in the ground, in fence line, bears N. and S., plainly mkd. $\frac{1}{4}$ on N. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

T1S R24E

$\frac{1}{4}$ $\frac{S19}{S30}$
1972

Bury original cor. stone alongside iron post.

S. 80° 34' W., beginning new measurement.

Continue over rolling land.

9.85 Small draw, 15 ft. deep, drains S. 50° E.

18.35 Trail road, bears N. 40° W. and S. 40° E. along low spur, slopes S. 40° E.

23.85 Draw, 25 ft. deep, drains S. 50° E.; asc. 80 ft. over SE slope.

Dependent Resurvey of
Subdivision, T. 1 S., R. 24 E., Salt Lake Mer., Utah

CHAINS	
27.35	Trail road, bears N. 27° E. and S. 27° W.
41.75	Fence, bears E. and W.
41.84	The cor. of secs. 19 and 30, on the W. bdy. of the Tp., hereinbefore described.
	From the cor. of secs. 19, 20, 29 and 30.
	N. 0° 58' W., bet. secs. 19 and 20.
	Over mountainous land through medium dense timber. Desc. 140 ft. over NW. slope.
12.00	Head of draw, drains W.; asc. 180 ft. over SW. slope.
40.12	The ¼ sec. cor. of secs. 19 and 20, monumented with a sandstone, 18x10x7 ins., firmly set in a small mound of stone, and plainly mkd. ¼ on W. face.
	from which the original bearing trees:
	A pine, 12 ins. diam., bears S. 85° 00' E., 23 lks. dist., with healed blaze.
	A pine, 25 ins. diam., bears S. 87° 00' W., 66 lks. dist., mkd. ¼ S19 BT.
	At the cor. point
	Set an iron post, 30 ins. long, 2½ ins. diam., 3 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.
	T1S R24E
	¼ S19 S20 1972
	Deposit original cor. stone in mound of stone, alongside iron post.

	N. 0° 58' W., beginning new measurement.
	Along W. slope.
2.40	Ridge, bears N. 35° W. and S. 35° E.; asc. 60 ft. along general E. slope.
20.19	Point for the N. 1/16 sec. cor. of secs. 19 and 20.
	Set an iron post, 30 ins. long, 2½ ins. diam., 3 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.
	T1S R24E
	N1/16 S19 S20 1972
	Asc. 20 ft. along E. slope.
25.40	Top of ascent, slopes E.; desc. 20 ft. along E. slope.
34.40	Head of draw, drains S. 30° E.; asc. 40 ft. over SE. slope.

Dependent Resurvey of
Subdivision, T. 1 S., R. 24 E., Salt Lake Mer., Utah

CHAINS
40.38

the cor. of secs. 17, 18, 19 and 20, monumented with a quartzite stone, 14x9x6 ins., firmly set 6 ins. in the ground, and plainly mkd. 3 notches on S. and 5 on E. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground, and in a collar of stone, with brass cap mkd.

T1S R24E

$\frac{S18}{S19} | \frac{S17}{S20}$
1972

Bury original cor. stone alongside iron post.

Reestablishment of the Survey Executed by A. D. Ferron, Deputy Surveyor, in 1879.

From the cor. of secs. 16, 17, 20 and 21.

N. 85° 33' W., bet. secs. 17 and 20.

Over rolling land through sagebrush undergrowth. Desc. 30 ft. over NW. slope.

5.50 Draw, drains N. 40° E.; asc. 100 ft. over rolling SE. slope.

39.86 Point for the ¼ sec. cor. of secs. 17 and 20, at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T1S R24E

$\frac{1}{4} \frac{S17}{S20}$
1972

Raise a mound of stone, 2½ ft. base, 1½ ft. high, N. of cor.

By triangulation. asc. about 40 ft. over gentle E. slope.

51.00 Base of ridge, bears N. and S.; asc. about 300 ft. over steep and broken E. slope. Enter timber.

59.79 Point for the W. 1/16 sec. cor. of secs. 17 and 20. End triangulation.

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 3½ ft. base to top, with brass cap mkd.

T1S R24E

$W1/16 \frac{S17}{S20}$
1972

Asc. 180 ft. over steep and broken NE. slope.

Dependent Resurvey of
Subdivision T. 1 S., R. 24 E., Salt Lake Mer., Utah

CHAINS	
73.00	Spur, slopes S. 50° E.; thence along S. slope.
79.72	The cor. of secs. 17, 18, 19 and 20.
	S. 89° 34' W., bet. secs. 18 and 19.
	Over broken and mountainous land through dense timber. Asc. 20 ft. over SE. slope.
7.00	Ridge, bears N. and S.; desc. 140 ft. over SW. slope.
17.00	Head of draw, drains S. 30° W.; thence along S. slope.
20.14	Point for the E. 1/16 sec. cor. of secs. 18 and 19.
	Set an iron post, 30 ins. long, 2½ ins. diam., 3 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.
	T1S R24E
	E1/16 $\frac{S18}{S19}$ 1972
	Asc. 20 ft. over SE. slope.
25.	Spur, slopes S. 30° W.; desc. 60 ft. over SW. slope.
40.28	The ¼ sec. cor. of secs. 18 and 19, monumented with a quartzite stone, 10x10x8 ins., firmly set in small mound of stone, and dimly mkd. ¼ on N. face.
	At the cor. point
	Set an iron post, 30 ins. long 2½ ins. diam., 2 ins. in the ground to bedrock, and in a mound of stone, 3½ ft. base to top, with brass cap mkd.
	T1S R24E
	¼ $\frac{S18}{S19}$ 1972
	Deposit original cor. stone in mound of stone, alongside iron post.
	S. 80° 09' W., beginning new measurement.
	Desc. 140 ft. over broken SW. slope.
22.00	Draw, drains S. 20° E.; asc. 160 ft. over SE. slope.
33.00	Point of rocky spur, slopes S. 25° E.; desc. 140 ft. over broken SW. slope.
38.80	Trail road, in wide hollow, bears N. 30° W. and S. 30° E.
41.30	The cor. of secs. 18 and 19, on the W. bdy. of the Tp., hereinbefore described.
	From the cor. of secs. 17, 18, 19 and 20.
	N. 3° 39' W., bet. secs. 17 and 18.

Dependent Resurvey of
Subdivision, T. 1 S., R. 24 E., Salt Lake Mer., Utah

CHAINS

Over mountainous land through dense timber. Asc. 180 ft.
Over broken SE. slope.

24.40 Top of ascent, on E. side of high ridge, bears N. 65° W.
from S.; thence by triangulation, desc. about 200 ft.
over steep NE. slope.

32.74 The ¼ sec. cor. of secs. 17 and 18, monumented with a
quartzite stone, 20x8x6 ins., firmly set 6 ins. in the
ground, and plainly mkd. ¼ on W. face. End triangulation.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in
the ground to bedrock, and in a mound of stone, 3 ft.
base to top, with brass cap mkd.

T1S R24E

¼
S18|S17
1972

Deposit original cor. stone in mound of stone, alongside
iron post.

North, beginning new measurement.

Desc. 450 ft. over steep and broken NE. slope.

20.17 Point for the N. 1/16 sec. cor. of secs. 17 and 18.

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in
the ground to bedrock, and in a mound of stone, 4 ft.
base to top, with brass cap mkd.

T1S R24E

N1/16
S18|S17
1972

Desc. 120 ft. over NE. slope.

21.80 Leave timber, bears NW. and SE.

29.50 Calder Ditch, 10 lks. wide, 2 ft. deep, drains S. 55° E.;
thence over gently rolling land.

33.50 Calder Ditch, drains N. 84° W. about 2.50 chs., thence S.
55° E.; enter cultivated land.

40.34 The cor. of secs. 7, 8, 17 and 18, monumented with a quar-
tzite stone, 12x8x6 ins., firmly set 6 ins. in the ground,
in fence line, bears N. 89° 59' E. and S. 89° 36' W.,
plainly mkd. 4 notches on S. and 5 on E. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in
the ground, and in a collar of stone, with brass cap mkd.

T1S R24E

S7|S8
S18|S17
1972

Dependent Resurvey of
Subdivision. T. 1 S., R. 24 E. Salt Lake Mer. Utah

CHAINS

Bury original cor. stone alongside iron post, and raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

From the cor. of secs. 8, 9, 16 and 17.

S. 88° 56' W., bet. secs. 8 and 17.

Over gently rolling land through sagebrush undergrowth.

- 0.30 Improved dirt road, bears S. 32° 45' E. and N. 32° 45' W. curving W.
 - 2.50 Calder Ditch, 10 lks. wide, 3 ft. deep, drains S. 22° E.
 - 6.50 Same ditch, drains N. 25° E.
 - 11.00 Same ditch, drains S. 48° E.
 - 19.25 Same ditch, drains N. 25° E.; enter pasture land.
 - 20.55 Fence cor., with fence extending S. 14° W. and S. 88° 56' W.; thence along fence line.
 - 21.00 Improved dirt road, bears S. 89° W. and N. 33° E. about 5.00 chs., thence E.; thence along S. side of road.
 - 29.00 Ditch, drains irregularly S.
 - 41.00 Point for the ¼ sec. cor. of secs. 8 and 17, at corner of fences, extending S., N. 88° 56' E. and S. 89° 59' W. This point is harmoniously related to existing original corners and is accepted as the best existing evidence of the position of the original cor.
- At the cor. point.
- Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground, and in a collar of stone, with brass cap mkd.

T1S R24E

¼ S8
S17
1972

Raise a mound of stone, 2½ ft. base, 1½ ft. high, N. of cor.

S. 89° 59' W., beginning new measurement.

Along fence line over pasture land, and along S. side of improved dirt road.

- 10.00 Fence and improved dirt road, turns to about N. 89° W.

- 20.32 Point for the W. 1/16 sec. cor. of secs. 8 and 17, in fence line, bears S. and N. 0.20 chs. to cor., thence about E. and W.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T1S R24E

W1/16 S8
S17
1972

Dependent Resurvey of
Subdivision T. 1 S., R. 24 E., Salt Lake Mer., Utah

CHAINS

- Continue along S. side of fence line.
- 29.00 Calder Ditch, drains S. 20° E.
- 30.00 Leave dirt road, which bears about N. 81° 30' W.
- 40.64 The cor. of secs. 7, 8, 17 and 18.
-
- S. 89° 36' W., bet. secs. 7 and 18.
- Over gently rolling pasture land, along fence line.
- 17.00 Base of ridge, bears NW. and SE.; asc. 120 ft. over NE. slope. Enter dense timber.
- 20.00 Fence, turns N., leave fence line.
- 29.00 Low knoll, on spur, slopes N. 50° E.; desc. 40 ft. along N. slope.
- 34.00 Head of draw, drains N.; asc. 60 ft. over NE. slope.
- 40.52 Point for the ¼ sec. cor. of secs. 7 and 18, at proportionate dist.; there is no remaining evidence of the original cor.
- Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, with brass cap mkd.
- T1S R24E
- $$\frac{1}{4} \frac{S7}{S18}$$
 1972
- Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.
- By triangulation and traverse, asc. about 460 ft. over steep NE. slope through dense timber.
- 78.82 The cor. of secs. 7 and 18, on the W. bdy. of the Tp., hereinbefore described.
-
- From the cor. of secs. 7, 8, 17 and 18.
- N. 0° 28' W., bet. secs. 7 and 8.
- Over gently rolling pasture land.
- 3.75 Improved dirt road, bears N. 85° W. and S. 85° E., on slight curve.
- 4.00 Cor. of fence, with fence extending N. 1° 35' E. and westward along N. side of improved road.
- 8.00 Enter timber, bears E. and W.; asc. 20 ft. over SW. slope.
- 11.00 Point of low spur, slopes S. 65° E.; desc. 30 ft. over NE. slope.
- 16.00 Leave timber, bears NW. and SE.
- 19.80 Calder Ditch, 10 lks. wide, 3 ft. deep, drains S. 85° E. about 5.00 chs., thence south.
- 20.00 Cor. of fence, bears East 0.68 chs. dist., with fences extending E. and S. 1° 35' W.

Dependent Resurvey of
Subdivision, T. 1 S., R. 24 E., Salt Lake Mer., Utah

CHAINS	
20.30	<p>Point for the S. 1/16 sec. cor. of secs. 7 and 8.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T1S R24E</p> <p style="text-align: center;">S1/16 S7 S8 1972</p>
26.30	<p>Pot Creek, 15 lks. wide, 12 ins. deep, flows irregularly E.; asc. 100 ft. over S. slope.</p>
30.00	<p>Enter timber, bears E. and W.</p>
40.60	<p>The ¼ sec. cor. of secs. 7 and 8, monumented with a quartzite boulder, 24x24x14 ins. above ground, plainly mkd. with a cross (+) and ¼ on top face. True point cannot be perpetuated.</p> <p>Point selected for the witness ¼ sec. cor. of secs. 7 and 8, bears N. 1° 02' W., 0.02 chs. dist., hereinafter described.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 1° 02' W., beginning new measurement.</p>
0.02	<p>Point for the witness ¼ sec. cor. of secs. 7 and 8.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, along N. side of original cor. stone, and in a mound of stone, 3 ft. base to top, with brass cap mkd.</p> <p style="text-align: center;">T1S R24E</p> <p style="text-align: center;">¼ S7 S8 W C 1972</p> <p>Asc. 120 ft. over steep S. slope.</p>
5.00	<p>Enter dense mahogany timber.</p>
13.00	<p>Spur, slopes S. 30° E.; asc. 80 ft. over SE. slope.</p>
35.50	<p>Top of ascent; NE. edge of ridge, bears W. and curves S. 30° E.; desc. 100 ft. over steep N. slope. Enter dense pine timber.</p>
40.18	<p>Point for the cor. of secs. 5, 6, 7 and 8, at proportionate dist.; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 3½ ft. base to top, with brass cap mkd.</p> <p style="text-align: center;">T1S R24E</p> <p style="text-align: center;">S6 S5 S7 S8 1972</p>
	<p>From the cor. of secs. 4, 5, 8 and 9.</p>

Dependent Resurvey of
Subdivision, T. 1 S., R. 24 E., Salt Lake Mer., Utah

CHAINS

1. 88° 59' W., bet. secs. 5 and 8.

Over nearly level land through sagebrush undergrowth.

4.00 Base of spur, bears NW. and SE.; asc. 400 ft. over steep and broken NE. slope. Enter dense mahogany timber.

20.18 Point for the E. 1/16 sec. cor. of secs. 5 and 8.

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T1S R24E

E1/16 $\frac{S5}{S8}$
1972

Asc. 80 ft. over broken NE. slope.

22.00 Spur, slopes S. 40° E.; desc. 200 ft. over steep and broken SW. slope.

40.36 Point for the ¼ sec. cor. of secs. 5 and 8, at proportionate dist.; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 2 ins. in the ground to bedrock, and in a mound of stone, 5 ft. base to top, with brass cap mkd.

T1S R24E

¼ $\frac{S5}{S8}$
1972

Desc. 250 ft. over broken SW. slope.

60.00 Draw, drains S. 40° E. from N. 60° W.; asc. 160 ft. over NE. slope.

64.00 Trail road, on curve, bears S. 53° E. from N. 80° W.

80.72 The cor. of secs. 5, 6, 7 and 8.

S. 89° 57' W., bet. secs. 6 and 7.

Over mountainous land through dense timber. Asc. 120 ft. over NE. slope.

18.50 Saddle, on ridge, bears N. and S.; desc. 180 ft. over W. slope. Enter pine and mahogany timber.

20.36 Fence, bears N. and S.

40.26 The ¼ sec. cor. of secs. 6 and 7, monumented with a quartzite stone, 26x5x4 ins., firmly set 6 ins. in the ground, and plainly mkd. ¼ on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.

Dependent Resurvey of
Subdivision, T. 1 S., R. 24 E., Salt Lake Mer., Utah

CHAINS

T1S R24E

$\frac{1}{4}$ $\frac{S6}{S7}$
1972

- Deposit original cor. stone in mound of stone, alongside iron post.
-
- S. 88° 50' W., beginning new measurement.
- Desc. 80 ft. over W. slope.
- 17.00 Base of ridge, bears N. and S. Leave timber, enter sagebrush and grass; thence over gently rolling land.
- 19.45 Fence, bears N. and S.
- 36.64 The cor. of secs. 1, 6, 7 and 12, on the W. bdy. of the Tp., hereinbefore described.
-
- From the cor. of secs. 5, 6, 7 and 8.
- N. 1° 50' E., bet. secs. 5 and 6.
- Over mountainous land through medium dense timber. Desc. 60 ft. over NE. slope.
- 5.50 Draw, drains N. 60° E.; asc. 40 ft. along E. slope. Leave timber.
- 20.10 Point for the S. 1/16 sec. cor. of secs. 5 and 6.
- Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground to bedrock, and in a mound of stone, 3 ft. base to top, with brass cap mkd.
- T1S R24E
- S1/16
S6|S5
1972
- Asc. 200 ft. over SE. slope.
- 40.20 Point for the ¼ sec. cor. of secs. 5 and 6, at proportionate dist.; there is no remaining evidence of the original cor.
- Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.
- T1S R24E
- $\frac{1}{4}$
S6|S5
1972
- Asc. 580 ft. over broken and steep SE. slope.
- 80.90 The closing cor. of secs. 5 and 6, on the Salt Lake Base Line, monumented with an iron post, 2½ ins. diam., firmly set in mound of stone, 3½ ft. base, 1½ ft. high, with brass cap mkd.

Dependent Resurvey of
Subdivision, T. 1 S., R. 24 E., Salt Lake Mer., Utah

CHAINS

T1N R24E

S31
S6|S5
C C
T1S R24E
1964

From this point, the stan. cor. of Tps. 1 N., Rs. 23 and 24 E., bears S. 89° 27' W., 5.90 chs. dist., monumented by an iron post, 2½ ins. diam., with brass cap mkd.

SC
T1N
R23E R24E
S36|S31
1964

From the same point, the true point for the stan. ¼ sec. cor. of sec. 31, T. 1 N., R. 24 E., bears N. 89° 27' E., 34.21 chs. dist. and is witnessed S. 89° 27' W., 0.37 chs. dist. by an iron post, 2½ ins. diam., with brass cap mkd.

SC
T1N R24E
¼ S31 WC
1964

General Description

Township 1 South, Range 24 East, is located on Diamond Mountain, about 30 miles northeast of Vernal, Utah. It is high plateau land with wide valleys divided by high broken and ledgy ridges, covered with mahogany, aspen, pine, juniper and ponderosa pine timber. Undergrowth consists of sagebrush, serviceberry, grass and buckbrush. Large portions of sections 1, 2, 11, 12 and 14 have been reseeded into grass. The north and east portion of section 22, and the north and west portion of section 23, are under cultivation. The area is drained in a general southeasterly direction. The elevation varies from 7,000 ft. to 8,250 ft. above sea level. The soil is mostly shallow, rocky loam.

Crouse Reservoir is located in the northeast portion of section 23 and the southeast portion of section 14. Calder Reservoir is located in the south half of section 15. There are other smaller reservoirs located in sections 4, 9, 11, 13, 14 and 17. Pot Creek, a stream of clear water, about 5 lks. wide, and from 6 to 12 ins. deep, enters the township in section 7 and flows easterly through the township, leaving in section 24. It also supplies the water for Calder and Crouse Reservoirs. Fresh water springs were noted in sections 10 and 31, and a well in section 4.

Access to the township is by an improved dirt road passing through sections 24, 25, 35 and 36, and one passing through sections 34, 26, 27, 23, thence along Pot Creek, through sections 15, 16, 17, 8 and leaving the township in section 7. Further access is by numerous trail roads located throughout the township.

The magnetic declination was taken from U.S.G.S. quadrangle sheets "Crouse Reservoir", 1967, and "Blair Basin", 1950. After applying the annual change, the average of these two was found to be 15° 15' East.

Blank

Page

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS

NAMES	CAPACITY
Milton Ross Workman	Supervisory Cadastral Surveyor
H. Dennis Badger	Supervisory Cadastral Surveyor
Thomas Stuart Burt	Surveying Technician
James S. Tellerico	Surveying Aid
Alan G. Plowgian	Surveying Aid
Gregory W. Darlington	Surveying Aid
Gregory K. Landheim	Surveying Aid
Steve Messinger	Surveying Aid
Stephen K. Ruff	Surveying Aid

CERTIFICATE OF SURVEY

(I) ~~(ME)~~

Glen B. Hatch

, HEREBY

CERTIFY upon honor that, in pursuance of special instructions bearing date of the 17th day of May, 1972, (I) ~~(ME)~~ have dependently resurveyed the south, east and west boundaries and the subdivisional lines of Township 1 South, Range 24 East

of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by (me), ~~(ME)~~ and under (my) ~~(MY)~~ direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

January 25, 1973

(Date)



~~(Glen B. Hatch)~~

Supervisory Cadastral Surveyor

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

SUBMITTED FOR APPROVAL

Date NOV 27 1974

BUREAU OF LAND MANAGEMENT
Washington, D.C.

The foregoing field notes of the dependent resurvey of the south, east and west boundaries and the subdivisional lines of Township 1 South, Range 24 East, of the Salt Lake Meridan, in the State of Utah

executed by Glen B. Hatch, Supervisory Cadastral Surveyor having been critically examined and found correct, are hereby approved.

NOV 1975

(Date)



(Chief, Division of Cadastral Survey)

CERTIFICATE OF TRANSCRIPT

~~I CERTIFY That the foregoing transcript of the field notes of the above described surveys in~~
~~, is a true copy of the original field notes.~~

(Date)

(Chief, Division of Cadastral Survey)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
ORIGINAL

595

FIELD NOTES

OF THE

DEPENDENT RESURVEY

OF

A PORTION OF THE NORTH BOUNDARY

AND

A PORTION OF THE SUBDIVISION

OF

TOWNSHIP 7 SOUTH, RANGE 3 WEST

Of the SALT LAKE Meridian,

In the State of UTAH

EXECUTED BY

Glen B. Hatch Supervisory Cadastral Surveyor

Under special instructions dated June 6, 1973, approved June 6, 1973,


_____, which provided for the surveys included under U.S. Survey/Group
Number 547, and assignment instructions dated June 22, 1973.

Survey commenced October 3, 1973

Survey completed October 5, 1973

INDEX DIAGRAM

Township 7 South Range 3 West
 5 4 3 2

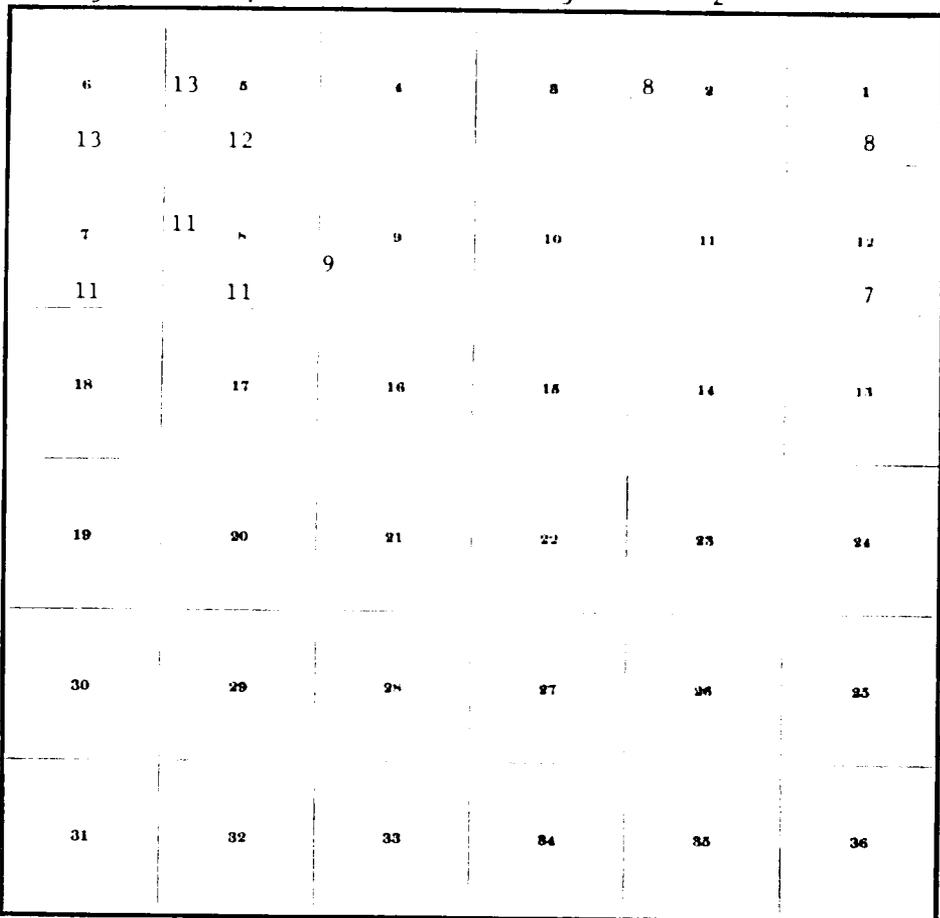

CHAINS

Township 7 South, Range 3 West, Salt Lake Meridian, Utah

The history of surveys of Township 7 South, Range 3 West, Salt Lake Meridian, Utah, is as follows:

	<u>Surveyed by</u>	<u>Retr. or Resurveyed by</u>
<u>NORTH BOUNDARY</u>		
West portion	C. L. Craig	1856
E. 1½ mi.	Joseph Trokolawski	1856
W. 2 mi.		A. D. Ferron 1871
East portion		Robert Gorlinski 1887
Portions of secs. 2 and 3	Robert Gorlinski	1887
West portion Sec. 4 and E. ½ Sec. 1		Robert Gorlinski 1892
		Joseph C. Thoma 1918

EAST BOUNDARY

All	Joseph Trokolawski	1856
All		Robert Gorlinski 1887
All		Joseph C. Thoma 1918

WEST BOUNDARY

All	A. D. Ferron	1871
All		Ralph Gentry; R. C. Yundt and J. C. Clark 1944

SUBDIVISIONS

Portion	Joseph Trokolawski	1856
Portion	A. D. Ferron	1871
Portion	Robert Gorlinski	1887
Portion		Robert Gorlinski 1887
Portion	Joseph C. Thoma	1918
Portion		Joseph C. Thoma 1918

The following field notes are those of the dependent re-survey of a portion of the north boundary and a portion of the subdivisional lines of T. 7 S., R. 3 W., Salt Lake Meridian, Utah

The survey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1947, and Special Instructions dated June 6, 1973.

The direction of the lines of this survey were determined by reference to true meridians established on line by hour angle observations on Polaris. The lines were carried forward by sustained angulation, being supplemented by other hour angle observations on Polaris taken throughout the progress of the survey. Distances were determined by chaining and by an electronic measuring device, with topography scaled from U.S. Geological Survey "Five Mile Pass Quadrangle", photorevised, 1969, 7½' series.

Before restoring the corners, the lines of the original survey were retraced and diligent search made for any evidence of the original corners, or other calls of the original field note record. When duly identified the original corners were remonumented in their original

CHAINS Townshi 7 South Ran e 3 West Salt Lake Meridian Utah positions.

The rules of proportionate measurement were applied to ascertain the position of the lost corners, but not until exhausting every reasonable possibility of finding direct evidence for the control of each particular corner.

The geographic position of the southeast corner of section 12 is at Latitude $40^{\circ} 13' 04''$ North and Longitude $112^{\circ} 08' 18''$ West, as computed from section line ties from U.S.G.S. triangulation station "SEC COR 36/6S/4W", established in 1971, which is also the cor. of Tps. 6 and 7 S., Rs. 3 and 4 W., at Latitude $40^{\circ} 14' 51.933''$ North and Longitude $112^{\circ} 13' 50.053''$ West.

The mean magnetic declination was found to be $16^{\circ} 15'$ East.

Dependent Resurvey of a Portion of the North Boundary,
T. 7 S., R. 3 W., Salt Lake Meridian, Utah

Reestablishment of the Survey Executed by Joseph Troskolawski, Deputy Surveyor, in 1856 and the Resurvey Executed by Robert Gorlinski, Deputy Surveyor, in 1887

Beginning at the cor. of secs. 1, 2, 35 and 36, on the N. bdy. of the Tp., monumented with a limestone, $14 \times 8 \times 4$ ins., firmly set 6 ins. in the ground, and plainly mkd. 1 notch on E. and 5 on the W. edges.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T6S R3W
S35|S36
 S2|S1
 T7S R3W
 1973

Bury original cor. stone alongside iron post, and set a railroad tie, 8 ins. square, 8 ft. long, extending 6 ft. above ground, alongside.

N. $89^{\circ} 53'$ W., bet. secs. 2 and 35.

Over nearly level dry farm land.

- 22.45 Old Salt Lake and Western railroad grade, on slight curve, bears N. $51^{\circ} 15'$ E. and S. $53^{\circ} 45'$ W., leave dry farm land, enter sagebrush and grass.
- 30.15 Spur, slopes S.; desc. over SW. slope.
- 40.28 The $\frac{1}{4}$ sec. cor. of secs. 2 and 35, monumented with a blue limestone, $16 \times 14 \times 14$ ins., firmly set 6 ins. in the in the ground, and plainly mkd. $\frac{1}{4}$ on N. face, and witnessed by a mound of stone along N. side.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 15 ins.

Dependent Resurvey of a Portion of the North Boundary,
T. 7 S., R. 3 W., Salt Lake Meridian, Utah

CHAINS

in the ground to bedrock, and in a mound of stone, 3½ ft. base to top, with brass cap mkd.

T6S R3W
 $\frac{1}{4}$ $\frac{S35}{S2}$
 T7S R3W
 1973

Bury original cor. stone alongside iron post.

Reestablishment of the Survey Executed by
 Robert Gorlinski, Deputy Surveyor, in 1887

N. 89° 55' W., beginning new measurement.

- 0.20 Enter dry farm land, bears NW. and SE.
- 6.20 Leave dry farm land, bears nearly N. and S.; asc. over NE. slope, enter scattered timber.
- 40.24 The cor. of secs. 2, 3, 34 and 35, monumented with a limestone, 14x8x4 ins., firmly set 6 ins. in the ground, and plainly mkd. 2 notches on E. and 4 on W. edges, and witnessed by a small mound of stone along W. side.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T6S R3W
 $\frac{S34}{S3} | \frac{S35}{S2}$
 T7S R3W
 1973

Bury original cor. stone alongside iron post, and rebuild mound of stone, 2 ft. base, 2 ft. high, W. of cor.

From this cor., cor. No. 4, Mineral Survey No. 6926, Lucky Strike Fire Clay lode, identical with cor. No. 2, Jake Lode, of same survey, marked by an iron post, 2 ins. diam., extending 18 ins. above ground, with brass cap mkd. L.S. 4-6926 in NW. quadrant and JAKE 26926 in SW. quadrant, bears S. 3° 34' W., 6.15 chs. dist.

From the same cor., a mine shaft, bears N. 12° E., 16.00 chs. dist.

S. 89° 56' W., bet. secs. 3 and 34.

Over rolling land through widely scattered timber; desc. over NW. slope.

- 1.13 Intersect line 3-4, mineral survey No. 6926, Lucky Strike Fire Clay lode, at a point S. 6° 57' E., 2.858 chs. dist. from cor. No. 3.
- 11.00 Wash, drains irregularly S.; thence along rolling S. Slope.

Dependent Resurvey of a Portion of the North Boundary,
T. 7 S., R. 3 W., Salt Lake Meridian, Utah

CHAINS

- 22.56 Intersect line 1-2, Mineral Survey No. 6926, Lucky Strike Fire Clay lode, at a point S. 6° 57' E., 0.333 chs. dist. from cor. No. 2 which is an iron post, 2 ins. diam., extending 18 ins. above ground, with cap mkd. L.S. 2-6926 in SE. quadrant.
- 40.26 The $\frac{1}{4}$ sec. cor. of secs. 3 and 34, monumented with a limestone, 22x14x12 ins., firmly set 10 ins. in the ground, and mkd. $\frac{1}{4}$ on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T6S R3W
 $\frac{1}{4}$ $\frac{S34}{S3}$
T7S R3W
1973

Bury original cor. stone alongside iron post.

N. 89° 57' W., beginning new measurement.

- 24.95 Wash, drains S. 70° E.
- 39.25 Trail road, bears S. 48° E. and N. 48° W. 50 lks. to junction with trail road from S.
- 40.24 The cor. of secs. 3, 4, 33 and 34, monumented with an iron post, 2 ins. diam., extending 8 ins. above ground, and in a collar of stone, with brass cap mkd.

T6S R3W
S33|S34
S4|S3
T7S
1918

Reestablishment of the Survey Executed by C. L. Craig, Deputy Surveyor, in 1856; the Resurveys Executed by A. D. Ferron, Deputy Surveyor, in 1871 and Robert Gorlinski, Deputy Surveyor, in 1892.

From the cor. of secs. 4, 5, 32 and 33, remonumented by Joseph C. Thoma in 1918, with an iron post, 2 ins. diam., extending 6 ins. above ground, with brass cap mkd.

T6S R3W
S32|S33
S5|S4
T7S
1918

S. 89° 12' W., bet. secs. 5 and 32.

Over gently rolling land through shadscale and sagebrush undergrowth.

- 0.15 Wash, 20 lks. wide, 3 ft. deep, drains irregularly SW.

Dependent Resurvey of a Portion of the North Boundary,
T. 7 S., R. 3 W., Salt Lake Meridian, Utah

CHAINS

40.17 The $\frac{1}{4}$ sec. cor. of secs. 5 and 32, monumented with a limestone, 20x14x14 ins., firmly set 12 ins. in the ground, and plainly mkd. $\frac{1}{4}$ on N. face, and witnessed by a mound of stone along N. side.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T6S R3W

$\frac{1}{4}$ $\frac{S32}{S5}$

T7S R3W
1973

Bury original cor. stone alongside iron post, and rebuild mound of stone, $1\frac{1}{2}$ ft. base, 1 ft. high, N. of cor.

S. $89^{\circ} 11'$ W., beginning new measurement.

1.00 Wash, 10 lks. wide, 1 ft. deep, drains S. 75° W.

20.15 Point for the W. $\frac{1}{6}$ sec. cor. of secs. 5 and 32.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T6S R3W

W $\frac{1}{16}$ $\frac{S32}{S5}$

T7S R3W
1973

33.50 Trail road, bears NE. and SW.

40.30 The cor. of secs. 5, 6, 31 and 32, marked by an iron post, $1\frac{1}{2}$ ins. diam., extending 30 ins. above ground, and in a mound of stone. This position is harmoniously related to existing found original corners, and used by local surveyors and residents of area and is accepted as the best existing evidence of the position of the original corner.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ in. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

T6S R3W

$\frac{S31}{S6} | \frac{S32}{S5}$

T7S R3W
1973

Set local iron post marker, inverted, and alongside iron post.

S. $89^{\circ} 11'$ W., bet. secs. 6 and 31.

Over nearly level land through sagebrush undergrowth.

2.20 Mine shaft, 20 lks. diam., undetermined depth, bears

Dependent Resurvey of a Portion of the North Boundary,
T. 7 S., R. 3 W., Salt Lake Meridian, Utah

CHAINS

S. 35 lks. dist.

7.00 Trail road, bears N. 25° E. and S. 25° W. to State Highway No. 73.

9.90 Centerline of State Highway No. 73, bears N. 45° 15' W. to Stockton and S. 45° 15' E. to Fairfield.

20.23 Point for the E. 1/16 sec. cor. of secs. 6 and 31.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

	T6S R3W
	<u>S31</u>
E 1/16	S6
	T7S R3W
	1973

40.46 The ¼ sec. cor. of secs. 6 and 31, monumented with a limestone, 16x10x10 ins., firmly set 8 ins. in the ground and in a mound of stone, plainly mkd. ¼ on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, and in a collar of stone, with brass cap mkd.

	T6S R3W
	<u>S31</u>
¼	S6
	T7S R3W
	1973

Bury original cor. stone alongside iron post.

S. 89° 08' W., beginning new measurement.

40.42 The cor. of Tps. 6 and 7 S., Rs. 3 and 4 W., monumented with an iron post, 3 ins. diam., extending 10 ins. above ground, with brass cap mkd.

	T6S
	R4W R3W
	<u>S36 S31</u>
	S1 S6
	T7S
	1943

This cor. also functions as a U.S. Geological Survey Triangulation station.

Dependent Resurvey of a Portion of the Subdivision,
T. 7 S., R. 3 W., Salt Lake Meridian, Utah

Reestablishment of the Survey Executed by Joseph Troskolawski, Deputy Surveyor, in 1856, and the Resurvey Executed by Robert Gorkinski, Deputy Surveyor, in 1887.

Dependent Resurvey of a Portion of the Subdivision,
T. 7 S., R. 3 W., Salt Lake Meridian, Utah

CHAINS

From the cor. of secs. 7, 12, 13 and 18, on the E. bdy. of the Tp., monumented with an iron post, 2 ins. diam., extending 10 ins. above ground, with brass cap mkd.

T7S
R3W R2W
S12|S7
S13|S18
1918

N. 89° 43' W., bet. secs. 12 and 13.

Over gently rolling land through sagebrush undergrowth.

28.00 Trail road, curves S. 20° W. and N. 30° W.

39.70 The ¼ sec. cor. of secs. 12 and 13, monumented with a limestone, 24x15x15 ins., firmly set 12 ins. in the ground, plainly mkd. ¼ on N. face, and witnessed by a mound of stone to N.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T7S R3W
S12
¼ S13
1973

Bury the original cor. stone alongside iron post.

N. 89° 52' W., beginning new measurement.

Asc. 400 ft. over rocky E. slope.

35.00 Spur, slopes SE.; desc. over gentle SW. slope.

40.54 The cor. of secs. 11, 12, 13 and 14, monumented with an iron post, 2 ins. diam., set in a mound of stone, 4 ft. base to top, with brass cap mkd.

T7S R3W
S11|S12
S14|S13
1918

From the cor. of secs. 1, 6, 7 and 12, on the E. bdy. of the Tp., monumented with an iron post, 2 ins. diam., extending 12 ins. above ground, with brass cap mkd.

T7S
R3W R2W
S1|S6
S12|S7
1918

West, bet. secs. 1 and 12.

Over gently rolling land through sagebrush undergrowth.

18.50 Trail road, bears N. 50° E. and S. 50° W.

Dependent Resurvey of a Portion of the Subdivision,
T. 7 S., R. 3 W., Salt Lake Meridian, Utah

CHAINS

39.70 The $\frac{1}{4}$ sec. cor. of secs. 1 and 12, monumented with a quartzite stone, 15x8x6 ins., firmly set 8 ins. in the ground, and mkd. $\frac{1}{4}$ on N. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T7S R3W
 $\frac{1}{4}$ $\frac{S1}{S12}$
1973

Bury original cor. stone alongside iron post, and raise a mound of stone, $2\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

S. $89^{\circ} 54'$ W., beginning new measurement.

20.25 Point for the W. $1/16$ sec. cor. of secs. 1 and 12.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T7S R3W
W $1/16$ $\frac{S1}{S12}$
1973

40.50 The cor. of secs. 1, 2, 11 and 12, monumented with an iron post, 2 ins. diam., extending 12 ins. above ground, with brass cap mkd.

T7S R3W
 $\frac{S2|S1}{S11|S12}$
1918

Reestablishment of the Survey Executed by Robert Gorlinsk',
Deputy Surveyor, in 1887.

From the cor. of secs. 2, 3, 10 and 11, monumented with an iron post, 2 ins. diam., extending 3 ins. above ground with brass cap mkd.

T7S R3W
 $\frac{S3|S2}{S10|S11}$
1918

N. $1^{\circ} 43'$ W., bet. secs. 2 and 3.

Over rolling land through sagebrush undergrowth.

24.00 Wash, 50 lks. wide, 10 ft. deep, drains E.

32.00 State Highway No. 73, bears N. 67° E. to Fairfield, and S. 67° W. to Stockton.

35.00 Gravel road, bears N. 70° E. and S. 70° W.

36.00 Old Salt Lake and Western railroad grade, bears N. 70° E. and S. 70° W.

Dependent Resurvey of a Portion of the North Boundary,
T. 7 S., R. 3 W., Salt Lake Meridian, Utah

CHAINS

- 40.29 The $\frac{1}{4}$ sec. cor. of secs. 2 and 3, monumented with a broken quartzite stone, 6x6x4 ins., with $\frac{1}{4}$ mkd. on broken piece.
- At the cor. point
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.
- T7S R3W
 $\frac{1}{4}$
S3|S2
1973
- Bury original broken cor. stone alongside iron post.
-
- N. $0^{\circ} 02'$ W., beginning new measurement.
- 10.00 Wash, 30 lks. wide, 6 ft. deep, drains SE. from irregularly N.; asc. over general S. slope.
- 26.43 Intersect line 3-4, Mineral Survey No. 6926, Jake Lode, at a point S. $83^{\circ} 10'$ W., 0.618 chs. dist, from cor. No. 3.
- 31.57 Intersect line 2-3, Jake Lode, same survey, at a point S. $6^{\circ} 57'$ E., 3.217 chs. dist. from cor. No. 2, identical with cor. No. 4, Lucky Strike Fire Clay Lode, same survey, hereinbefore described.
- 38.00 Top of small knoll, on ridge, bears N. 15° W. and S. 20° E.; desc. N. slope.
- 40.92 The cor. of secs. 2, 3, 34 and 35, on the N. bdy. of the Tp., hereinbefore described.

Reestablishment of the Survey Executed by A. D. Ferron, Deputy Surveyor, in 1871, and the Resurvey Executed by J. C. Thoma, U.S. Cadastral Engineer, in 1918.

From the cor. of secs. 8, 9, 16 and 17, monumented with an iron post, 2 ins. diam., extending 2 ins. above ground at edge of gravel road, bears N. and S., with brass cap mkd.

T7S R3W
S8|S9
S17|S16
1918

N. $0^{\circ} 08'$ W., bet. secs. 8 and 9.

Over nearly level land along W. edge of gravel road.

- 12.00 Road, curves N. 36° E.
- 12.50 Old Salt Lake and Western railroad grade, on curve, bears N. 36° E. and S. 24° W.
- 40.00 The $\frac{1}{4}$ sec. cor. of secs. 8 and 9, monumented with a limestone, 12x8x6 ins., firmly set 8 ins. in the ground, and plainly mkd. $\frac{1}{4}$ on W. face. There is no remaining evidence of the iron post monument set in 1918.

Dependent Resurvey of a Portion of the Subdivision,
T. 7 S. R. 3 W. Salt Lake Meridian U

CHAINS

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T7S R3W
¼
S8|S9
1973

Bury original cor. stone alongside iron post.

From this cor., the cor. of secs. 5 and 8, hereinafter described, bears N. 0° 04' E., 40.16 chs. dist.

Reestablishment of the Survey Executed by A. D. Ferron, Deputy Surveyor, in 1871.

From the cor. of secs. 8, 9, 16 and 17.

N. 89° 51' W., bet. secs. 8 and 17.

Over gently rolling land through sagebrush undergrowth.

4.90 Old Salt Lake and Western railroad grade, bears N. 13° 25' E. and S. 13° 25' W.

39.82 The ¼ sec. cor. of secs. 8 and 17, monumented with a broken limestone, 8x6x3 ins., set 3 ins. in the ground, and mkd. ¼.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T7S R3W
¼
S8
S17
1973

Bury original broken cor. stone alongside iron post.

N. 89° 53' W., beginning new measurement.

13.20 Wash, 30 lks. wide, 6 ft. deep, drains S. 40° W.

36.50 Trail road, bears N. and curves SW.

40.19 The cor. of secs, 7, 8, 17 and 18, monumented with a limestone, 20x10x3 ins., firmly set 8 ins. in the ground, and plainly mkd. 4 notches on S. and 5 on E. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T7S R3W
S7|S8
S18|S17
1973

Dependent Resurvey of a Portion of the Subdivision,
T. 7 S. R. 3 W. Salt Lake Meridian, Utah

CHAINS

Bury original cor. stone alongside iron post.

S. 89° 55' W., bet. secs. 7 and 18.

Over gently rolling land through shadscale and sagebrush undergrowth.

33.50 Wash, 20 lks. wide, 5 ft. deep, drains S. 45° W.

40.25 The $\frac{1}{4}$ sec. cor. of secs. 7 and 18, monumented with a limestone, 10x6x3 ins., set 4 ins. in the ground, and mkd. $\frac{1}{4}$.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T7S R3W

$\frac{1}{4}$ $\frac{S7}{S18}$
1973

Bury original cor. stone alongside iron post.

S. 89° 52' W., beginning new measurement.

40.58 The cor. of secs. 7, 12, 13 and 18, on the W. bdy. of the Tp., monumented with an iron post, 2 ins. diam., extending 3 ins. above ground, and in a collar of stone, with brass cap mkd.

T7S
R4W R3W
 $\frac{S12}{S13} | \frac{S7}{S18}$
1944

From the cor. of secs. 7, 8, 17 and 18.

N. 0° 12'E. bet. secs. 7 and 8.

Over gently rolling land through shadscale and sagebrush undergrowth.

35.95 County road, oiled surface, bears N. 76° 45' E. to Fairfield and S. 76° 45' W. to Faust.

38.85 Wash, drains S. 80° W.

40.33 The $\frac{1}{4}$ sec. cor. of secs. 7 and 8, monumented with a limestone, 12x8x4 ins., set 5 ins. in the ground, mkd. $\frac{1}{4}$ on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

Dependent Resurvey of a Portion of the Subdivision,
T. 7 S., R. 3 W., Salt Lake Meridian, Utah

CHAINS

T7S R3W
 $\frac{1}{4}$
S7|S8
1973

Bury original cor. stone alongside iron post.

N. 0° 03' W., beginning new measurement.

- 40.21 The cor. of secs. 5, 6, 7 and 8, monumented with a limestone, 10x5x5 ins., set 4 ins. in the ground, and mkd. 5 notches on S. and E. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T7S R3W
S6|S5
S7|S8
1973

Bury original cor. stone alongside iron post.

From the cor. of secs. 5 and 8, monumented with an iron post, 2 ins. diam., extending 10 ins. above ground, with brass cap mkd.

T7S R3W
S5|
S8|
1918

N. 89° 37' W., bet. secs. 5 and 8.

Over gently rolling land through widely scattered timber with sagebrush and shadscale undergrowth.

- 19.96 Point for the E. 1/16 sec. cor. of secs. 5 and 8.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T7S R3W
E1/16 $\frac{S5}{S8}$
1973

- 31.85 Wash, drains S. 45° W.

- 32.85 Trail road, bears N. 20° W. and S. 20° E.

- 39.92 Point for the ¼ sec. cor. of secs. 5 and 8, at proportionate distance; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T7S R3W
 $\frac{1}{4}$ $\frac{S5}{S8}$
1973

Dependent Resurvey of a Portion of the Subdivision,
T. 7 S., R. 3 W., Salt Lake Meridian, Utah

CHAINS

- 79.84 The cor. of secs. 5, 6, 7 and 8.
-
- S. 89° 40' W., bet. secs. 6 and 7.
Over gently rolling land through shadscale and sagebrush undergrowth.
- 7.70 Trail road, bears N. 35° E. and S. 20° W.
- 20.10 Point for the E. 1/16 sec. cor. of secs. 6 and 7.
Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
- T7S R3W
E1/16 $\frac{S6}{S7}$
1973
- 40.20 Point for the ¼ sec. cor. of secs. 6 and 7, at proportionate distance; there is no remaining evidence of the original cor.
Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
- T7S R3W
¼ $\frac{S6}{S7}$
1973
- 60.30 Point for the W. 1/16 sec. cor. of secs. 6 and 7.
Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
- T7S R3W
W1/16 $\frac{S6}{S7}$
1973
- 80.55 The cor. of secs. 1, 6, 7 and 12, on the W. bdy. of the Tp., monumented with an iron post, 2 ins. diam., extending 8 ins. above ground, with brass cap mkd.
- T7S
R4W R3W
 $\frac{S1|S6}{S12|S7}$
1944
-
- From the cor. of secs. 5, 6, 7 and 8.
N. 0° 06' E., bet. secs. 5 and 6.
Over gently rolling land through shadscale and sagebrush undergrowth.
- 20.19 Point for the S. 1/16 sec. cor. of secs. 5 and 6.
Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

Dependent Resurvey of a Portion of the Subdivision,
T. 7 S. R. 3 W. Salt Lake Meridian Utah

CHAINS

T7S R3W
S1/16
S6|S5
1973

- 40.38 The $\frac{1}{4}$ sec. cor. of secs. 5 and 6, monumented with a limestone, 10x6x4 ins., set 4 ins. in the ground, dimly mkd. $\frac{1}{4}$.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T7S R3W
 $\frac{1}{4}$
S6|S5
1973

Bury original cor. stone alongside iron post.

N. $0^{\circ} 31'$ E., beginning new measurement.

- 42.85 State Highway No. 73, bears N. $45^{\circ} 15'$ W. and S. $45^{\circ} 15'$ E.
- 52.80 The cor. of secs. 5, 6, 31 and 32, on the N. bdy. of the Tp., hereinbefore described.

General Description

The area resurveyed within T. 7 S., R. 3 W., is mostly gently rolling desert land, with low hills located in the southwest portion of sec. 12 and the southeast portion of sec. 11. The elevation varies from 5,080 ft. to 5,500 ft. above sea level. Soil consists mostly of clay. Vegetation consists of shadscale and sagebrush with widely scattered juniper in the lower hills.

State Highway No. 73, and the old abandoned Salt Lake and Western railroad grade, crosses the northern portion of the township. There are numerous trail roads providing access to the several old and some newer prospect holes, located mostly in secs. 3 and 4, with some in Sec. 5.

Sections 4, 5, 6, 7, 8 and 9, drain in a westerly direction and secs. 1, 2, 3 and 12 drain in an easterly direction.

The magnetic declination readings were found to average $16^{\circ} 15'$ E.

CERTIFICATE OF SURVEY

(I) ~~(We)~~, Glen B. Hatch, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 6th day of June, 1973, (I) ~~(We)~~ have dependently resurveyed a portion of the North Boundary and a portion of the subdivisional lines of Township 7 South, Range 3 West

of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by (me), ~~(us)~~ and under (my) ~~(our)~~ direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

January 30, 1974 (Date) [Signature: Glen B. Hatch] (Cadastral Surveyor) Supervisory (Date) (Cadastral Surveyor)

CERTIFICATE OF APPROVAL

SUBMITTED FOR APPROVAL Date NOV 27 1974

BUREAU OF LAND MANAGEMENT Washington, D.C.

The foregoing field notes of the dependent resurvey of a portion of the North Boundary and a portion of the subdivisional lines of Township 7 South Range 3 West, of the Salt Lake Meridian, Utah

executed by Glen B. Hatch, Supervisory Cadastral Surveyor having been critically examined and found correct, are hereby approved.

NOV 7 1975 (Date) [Signature: Bernard W. Foley] (Chief, Division of Cadastral Survey)

CERTIFICATE OF TRANSCRIPT

~~I CERTIFY That the foregoing transcript of the field notes of the above described surveys in~~ is a true copy of the original field notes.

(Date) (Chief, Division of Cadastral Survey) 680 20-424

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

ORIGINAL

FIELD NOTES

OF THE
DEPENDENT RESURVEY

OF THE

WEST 1/2 MILE OF THE SOUTH BOUNDARY OF SECTION 36

THE SOUTH BOUNDARY OF SECTION 35

TOWNSHIP 27 SOUTH, RANGE 2 WEST

AND

A PORTION OF THE SUBDIVISIONAL LINES

OF

TOWNSHIP 28 SOUTH, RANGE 2 WEST

RECEIVED
UTAH STATE OFFICE
SALT LAKE CITY, UTAH
76 FEB 2 PM 4:16
DEPT. OF INTERIOR
BUR. OF LAND MGMT.

Of the SALT LAKE Meridian,

In the State of UTAH

EXECUTED BY

JERRY L. THOMAS SUPERVISORY CADASTRAL SURVEYOR

Under special instructions dated JUNE 16, 19 72, approved JUNE 19, 1972,

_____, which provided for the surveys included under U.S. Survey/Group
Number 539, and assignment instructions dated JUNE 20, 1972.

Survey commenced JULY 2, 19 73

Survey completed JULY 20, 19 73

INDEX DIAGRAM

Township 28 South, Range 2 West

				2	1
				7	
6	5	4	8	4 2	5 1
				7	
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Township 28 South, Range 2 West, Salt Lake Meridian, Utah

CHAINS

The following field notes are those of the dependent resurvey of the west $\frac{1}{2}$ mile of the south boundary of sec. 36, the south boundary of sec. 35, Township 27 South, Range 2 West, and the remaining boundary lines of sec. 2, Township 28 South, Range 2 West, Salt Lake Mer., Utah.

The north boundary, and a portion of the subdivision were surveyed by J. Breckon and H. McCarty, Deputy Surveyors in 1897.

The survey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1947, and the Special Instructions dated June 16, 1972.

The direction of the lines of this survey was determined by altitude observations on the sun. The lines were carried forward by sustained angulation being supplemented by other altitude observations on the sun taken throughout the progress of the survey. The vertical angles of measurements made on the slope were ascertained by a clinometer in good adjustment; the horizontal equivalents only are entered in the field notes.

Before restoring the corners, the lines of the original surveys were retraced and diligent search made for any evidence of the original corners, bearing trees and other calls of the field note record. When duly identified the corner positions were remonumented and new bearing objects marked.

The geographic position of the southeast corner of sec. 2, as scaled from U.S. Geological Survey "Greenwich, Utah" Quadrangle Map, 1969, 7 $\frac{1}{2}$ ' series; is as follows:

Latitude: 38° 23' 46" N. Longitude: 111° 58' 26" W.

The mean magnetic declination is 15° 15' E.

Dependent Resurvey of a Portion of the South Boundary
of Township 27 South, Range 2 West,
Salt Lake Meridian, Utah

Reestablishment of the Survey Executed by
J. Breckon and H. McCarty, Deputy Surveyors
in 1897.

Beginning at the $\frac{1}{4}$ sec. cor. of sec. 36, T. 27 S., R. 2 W., monumented with a sandstone 16x10x5 ins., firmly set, extending 6 ins. above ground and mkd. $\frac{1}{4}$ on the N. face.

from which the original bearing trees

A juniper, 8 ins. diam., bears N. 62° E., 109 lks. dist., mkd. $\frac{1}{4}$ S36 BT.

A pinon, 26 ins. diam., bears N. 74° E., 129 lks. dist., mkd. $\frac{1}{4}$ S36 BT.

At the cor point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

Dependent Resurvey of a Portion of the South Boundary,
T. 27 S. R. 2 W. Salt Lak M r a

CHAINS

T27S R2W
¼ S36
1973

Bury the orig. cor. stone alongside and raise a mound of stone, 2½ ft. base, 1½ ft. high, N. of cor.

Thence N. 89° 56' W., along the S. bdy. of sec. 36.

Over rolling land, through scattered juniper and pinon, thick sagebrush, grass and weeds; asc. 115 ft. over NE. slope.

10.00 Top of spur, slopes N.; asc. 15 ft. along gentle N. slope.

15.00 Slope changes; desc. 10 ft. over NW. slope.

22.60 Bottom of swale, drains N.; asc. 57 ft. over NE slope.

28.61 The closing cor. of secs. 1 and 2, T. 28 S., R. 2 W., hereinafter described.

sc. 138 ft. over NE. slope.

39.96 The cor. of secs. 35 and 36, T. 27 S., R. 2 W., monumented with a basalt stone 20x12x12 ins., firmly set, extending 15 ins. above ground and mkd. 5 notches on W. and 1 notch on E. edge, with scattered mound of stone to the W.

at the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T27S R2W
S35|S36
S2
T28S R2W
1973

Bury the orig. cor. stone alongside iron post.

Thence N. 89° 45' W., along the S. bdy. of sec. 35.

Over rough and broken land, through scattered juniper and pinon, sagebrush, grass and weeds; asc. 160 ft. over NE. slope.

13.00 Bottom of Browns Canyon, with spring branch, 2 lks. wide, 1 ins. deep, course N. 80° E.; asc. 280 ft. over SE. slope.

28.49 Point for the ¼ sec. cor. of sec. 2, T. 28 S., R. 2 W., hereinafter described.

sc. 360 ft. over steep SE. slope.

39.24 Point for the ¼ sec. cor. of sec. 35, T. 27 S., R. 2 W., at proportionate distance; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground, in a mound of stone, 4½ ft. base to top, with brass cap mkd.

Dependent Resurvey of a Portion of the South Boundary
T. 27 S., R. 2 W., Salt Lake Mer., Utah

CHAINS

T27S R2W

¼ S35

1973

Asc. 80 ft. over SE. slope.

42.75 Slope changes; asc. 200 ft. over steep E. slope.

49.50 Top of spur, slopes NE.; asc. 140 ft. over NE. slope.

64.00 Top of ridge spur, slopes N.; desc. 40 ft. over NW. slope.

68.33 The closing cor. of secs. 2 and 3, T. 28 S., R. 2 W., hereinafter described.

Desc. 120 ft. over NW. slope, through aspen and spruce timber.

74.00 Bottom of swale, drains N. 15° W.; asc. 20 ft. over NE. slope.

78.48 The cor. of secs. 34 and 35, T. 27 S., R. 2 W., monumented with a basalt stone 20x12x12 ins., firmly set, extending 12 ins. above ground and mkd. 4 notches on W. and 2 notches on E. edge.

from which the orig. bearing trees

An aspen, 6 ins. diam., bears N. 76° E., 20 lks. dist., with healed over markings.

An aspen, 6 ins. diam., bears N. 25° W., 25 lks. dist., with healed over markings.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground, in a mound of stone, 4½ ft. base to top, with brass cap mkd.

T27S R2W

S34|S35

S3

T28S R2W

1973

from which

A spruce, 10 ins. diam., bears N. 84¼° E., 41½ lks. dist., mkd. T27S R2W S35 BT.

A spruce, 10 ins. diam., bears S. 54¼° W., 13 lks. dist., mkd. T28S R2W S3 BT.

An aspen, 8 ins. diam., bears N. 84° W., 36 lks. dist., mkd. T27S R2W S34 BT.

Bury the orig. cor. stone alongside iron post.

Dependent Resurvey of a Portion of the Subdivision, Township 28 South, Range 2 West, Salt Lake Meridian, Utah.

Reestablishment of the Survey Executed by J. Breckon and H. McCarty, Deputy Surveyors in 1897.

Dependent Resurvey of a Portion of the Subdivision
T. 28 S. R. 2 W. Salt Lake Mer. Utah

CHAINS

The cor. of secs. 3 and 10, monumented with a basalt stone 18x8x6 ins., firmly set, extending 8 ins. above mound of stone, dimly mkd. 5 notches on S. edge.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 2 ins. in the ground, in a mound of stone, 4½ ft. base to top, with brass cap mkd.

T28S R2W
S3|S11
S10|
1973

Bury the orig. cor. stone alongside iron post.

Thence N. 0° 14' W., along the E. bdy. of sec. 3.

Over rough and broken land, through sparsely scattered juniper and mahogany; asc. 120 ft. over steep SE. slope.

3.50 Top of spur, slopes S. 15° W.; asc. 35 ft. along W. slope.

5.65 The closing cor. of secs. 2 and 11, monumented with a basalt stone 20x10x7 ins., firmly set, extending 12 ins. above ground and mkd. 2 notches on the E. edge, with a scattered mound of stone to the E.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground, in a mound of stone, 4½ ft. base to top, with brass cap mkd.

T28 R2W
S3|S2 C
S11 C
1973

Bury the orig. cor. stone alongside iron post.

Slope changes; asc. 120 ft. over SW. slope.

11.50 Top of spur, slopes SE.; asc. 60 ft. along steep E. slope.

19.00 Bottom of small draw, drains E.; continue along steep E. slope.

24.00 Bottom of draw, drains SE.; asc. 60 ft. over SE. slope.

29.50 Top of spur, slopes E.; desc. 40 ft. over NE slope.

31.50 Bottom of draw, drains E.; asc. 80 ft. over SE. slope.

38.00 Top of spur, slopes E.; desc. 50 ft. over steep N. slope, through lodgepole pine timber.

40.33 Point for the ¼ sec. cor. of sec. 3, at proportionate dist.; there is no remaining evidence of the orig. cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 15 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T28S R2W
¼ |
S3 |
1973

Dependent Resurvey of a Portion of the Subdivision
T. 28 S., R. 2 W., Salt Lake Mer., Utah

CHAINS

asc. 240 ft. over steep N. slope.

46.01 Point for the $\frac{1}{4}$ sec. cor. of sec. 2, at proportionate
dist.; there is no remaining evidence of the orig. cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins. in
the ground, in a mound of stone, $4\frac{1}{2}$ ft. base to top, with
brass cap mkd.

T28S R2W

| $\frac{1}{4}$
| S2

1973

Desc. 80 ft. over steep N. slope.

48.50 Bottom of canyon, drains E.; asc. 440 ft. over steep S.
slope; leave lodgepole pine timber.

61.00 Slope changes; asc. 160 ft. over SE. slope.

72.50 Top of ridge, bears E. and W.; desc. 160 ft. over NW.
slope, through aspen and spruce timber.

91.43 The closing cor. of secs. 2 and 3, T. 28 S., R. 2 W.,
monumented with a basalt stone 20x9x8 ins., firmly set,
extending 6 ins. above ground, mkd. CC on S. face, 4
notches on W. and 2 notches on E. edge, and in scattered
mound of stone.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 12 ins. in
the ground, in a mound of stone, $4\frac{1}{2}$ ft. base to top, with
brass cap mkd.

T27S R2W

S35
S3|S2
C C

T28S R2W

1973

from which

A spruce, 8 ins. diam., bears S. 67° E., $63\frac{1}{2}$ lks.
dist., mkd. T28S R2W S2 CC BT.

A spruce, 12 ins. diam., bears S. $63\frac{1}{2}^\circ$ W., $52\frac{1}{2}$ lks.
dist., mkd. T28S R2W S3 CC BT.

Bury the orig. cor. stone alongside iron post.

From this closing cor., the cor. of secs. 34 and 35,
T. 27 S., R. 2 W., hereinbefore described bears N. 89°
 $45'$ W., 10.15 chs. dist.

The cor. of secs. 1, 2, 11 and 12, monumented with a
basalt stone 14x12x8 ins., firmly set, extending 7 ins
above ground, mkd. 5 notches on S. and 1 notch on E.
edge, and in a scattered mound of stone.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins. in
the ground, in a mound of stone, $4\frac{1}{2}$ ft. base to top, with
brass cap mkd.

Dependent Resurvey of a Portion of the Subdivision,

CHAINS

T28S R2W
S2|S1
S11|S12
 1973

from which

A juniper, 10 ins. diam., bears N. 78° E., 31½ lks. dist., mkd. T28S R2W S1 BT.

A pinon, 12 ins. diam., bears S. 25½° E., 16 lks. dist., mkd. T28S R2W S12 BT.

bury the orig. cor. stone alongside iron post.

. 0° 51' W., bet. secs. 1 and 2.

over rolling land, through scattered juniper, pinon, sagebrush, grass and weeds; desc. 20 ft. over NE slope.

- 1.00 Bottom of draw, drains N. 85° E.; asc. 360 ft. over SE. slope.
- 14.00 Top of spur, slopes E.; desc. 40 ft. along E. slope.
- 25.00 Slope changes; desc. 160 ft. over NE. slope.
- 30.50 Bottom of draw, drains E.; asc. 160 ft. over SE. slope.
- 39.60 At the ¼ sec. cor. of secs. 1 and 2, monumented with a basalt stone 16x12x7 ins., firmly set, extending 8 ins. above ground and mkd. ¼ on W. face, from which the orig. bearing trees
 - A juniper, 10 ins. diam., bears S. 85° E., 25 lks. dist., mkd. ¼ S1 BT.
 - A pinon, 12 ins. diam., bears N. 20° W., 49 lks. dist., mkd. ¼ S2 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T28S R2W
 ¼
S2|S1
 1973

Bury the orig. cor. stone alongside iron post.

N. 0° 45' E., beginning new measurement.

Asc. 240 ft. over SE. slope.

- 8.75 Top of spur, slopes E.; desc. 80 ft. over NE. slope.
- 18.50 Bottom of swale, slopes E.; asc. 120 ft. over SE. slope.
- 24.00 Top of spur, slopes E.; desc. 320 ft. over NE. slope.
- 45.24 The closing cor. of secs. 1 and 2, monumented with a basalt stone 18x12x6 ins., firmly set, extending 10 ins. above ground, mkd. CC and 5 grooves on S. and 1 groove on N. face, with scattered mound of stone to S.

Dependent Resurvey of a Portion of the Subdivision
T. 28 S., R. 2 W., Salt Lake Mer., Utah

CHAINS

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins. in the ground, in a mound of stone, $4\frac{1}{2}$ ft. base to top, with brass cap mkd.

T27S R2W
S36
S2|S1
C C
T28S R2W
1973

Bury the orig. cor. stone alongside iron post.

Point for the $\frac{1}{4}$ sec. cor. of sec. 2 only, T. 28 S., R. 2 W., is at midpoint on the N. bdy. of sec. 2.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 5 ins. in the ground, in a mound of stone, $4\frac{1}{2}$ ft. base to top, with brass cap mkd.

$\frac{1}{4}$ S2
T28S R2W
1973

From this cor. point the $\frac{1}{4}$ sec. cor. of sec. 35, T. 27 S., R. 2 W., bears N. $89^{\circ} 45'$ W., 10.75 chs. dist., heretofore described.

From the cor. of secs. 1, 2, 11 and 12.

S. $89^{\circ} 48'$ W., bet. secs. 2 and 11.

Over rough and broken land, through scattered juniper, pinon, sagebrush, grass and weeds; asc. 40 ft. along N. slope.

- 3.00 Bottom of draw, drains N. 85° E.; asc. 360 ft. over SE. slope.
- 34.20 Top of spur, slopes S.; desc. 40 ft. along S. slope.
- 39.76 The $\frac{1}{4}$ sec. cor. of secs. 2 and 11, monumented with a basalt stone 15x11x6 ins., firmly set, extending 6 ins. above ground and mkd. $\frac{1}{4}$ on N. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 9 ins. in the ground, in a mound of stone, $4\frac{1}{2}$ ft. base to top, with brass cap mkd.

T28S R2W
 $\frac{1}{4}$ S2
S11
1973

Bury the orig. cor. stone alongside iron post.

S. $89^{\circ} 17'$ W., beginning new measurement.

Desc. 30 ft. along S. slope.

- 7.00 Bottom of deep draw, drains S. 70° E.; asc. 140 ft. over

Dependent Resurvey of a Portion of the Subdivision
T. 28 S. R. 2 W. Salt Lake Mer U

CHAINS

13.50 Slope changes; asc. 520 ft. over steep E. slope.
30.00 Top of spur, slopes SE.; desc. 20 ft. along S. slope.
34.00 Bottom of descent, slopes S.; asc. 100 ft. over SE. slope.
36.50 Top of spur, slopes SW.; desc. 50 ft. over W. slope.
39.65 The closing cor. of secs. 2 and 11, heretofore described.

GENERAL DESCRIPTION

Township 28 South, Range 2 West, is situated about 3 miles southwest of Greenwich, Utah. The elevation varies from 7,800 to 9,500 ft. above sea level. The soil is mostly rocky loam.

There are 2 small springs located in section 2, one in the northern portion and one in the central portion of the section. There are no roads or trails in this section

An average number of readings in this section gives a mean magnetic declination of 15° 15' E. with no noticeable difference in local attraction.

The section drains east.

CERTIFICATE OF SURVEY

(I) ~~(X)~~, Jerry L. Thomas, Supervisory Cadastral Surveyor, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 16th day of June, 1972, (I) ~~(X)~~ have resurveyed the west 1/2 mile of the boundary of section 36 and the south boundary of section 35, Township 27 South, Range 2 West, and a portion of the subdivisional lines of Township 27 South, Range 2 West,

of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by (me), ~~(X)~~ and under (my) ~~(X)~~ direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

March 20, 1974
(Date)

(Date)

Jerry L. Thomas
Supervisory (Cadastral Surveyor)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

SUBMITTED FOR APPROVAL
Date FEB 6 1975

BUREAU OF LAND MANAGEMENT
Washington, D.C.

The foregoing field notes of the resurvey of the west 1/2 mile of the boundary of sec. 36 and the south boundary of sec. 35, T. 27 S., R. 2 W., and a portion of the subdivisional lines of T. 28 S., R. 2 W., Salt Lake Meridian, Utah

executed by Jerry L. Thomas, Supervisory Cadastral Surveyor having been critically examined and found correct, are hereby approved.

JAN 20 1976
(Date)

Bernard W. Johnson
(Chief, Division of Cadastral Survey)

CERTIFICATE OF TRANSCRIPT

_____, is a true copy of the original field notes.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD NOTES

OF THE
 DEPENDENT RESURVEY OF A PORTION
 OF THE BRYCE CANYON NATIONAL PARK BOUNDARY
 BEING
 A PORTION OF THE SUBDIVISIONAL LINES
 AND A
 PORTION OF THE SUBDIVISION LINES
 THROUGH A NUMBER OF SECTIONS
 TOWNSHIP 37 SOUTH, RANGE 4 WEST

Of the SALT LAKE Meridian,
 In the State of UTAH

EXECUTED BY

KLAUS P. HENDRIX

CADASTRAL SURVEYOR

Under special instructions dated OCTOBER 11, 1972, approved OCTOBER 17, 1972


which provided for the surveys included under U.S. Survey Group
 Number 545, and assignment instructions dated OCTOBER 11, 1972

Survey commenced OCTOBER 26, 1972

Survey completed NOVEMBER 6, 1972

INDEX DIAGRAM

Township 37 South, Range 4 West

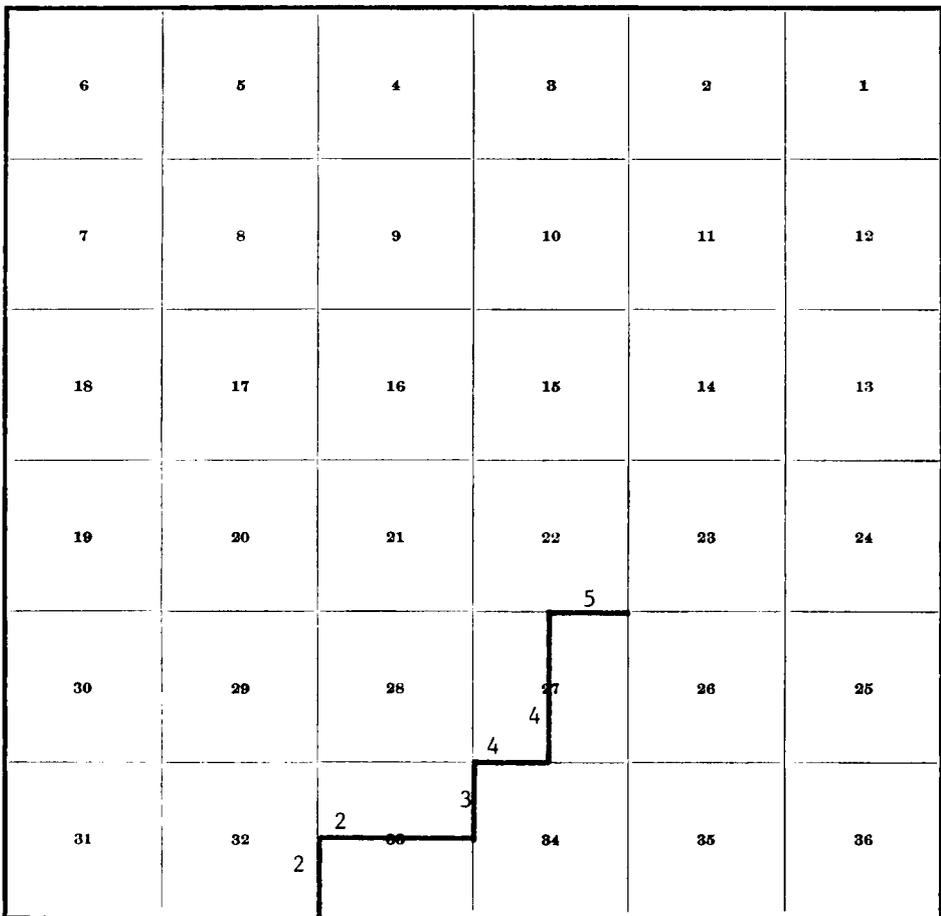

Township 37 South, Range 4 West
Salt Lake Meridian, Utah

CHAINS

The following field notes are those of the dependent resurvey of a portion of the Bryce Canyon National Park Boundary, being a portion of the subdivisional lines and a portion of the subdivision lines through a number of sections, Township 37 South, Range 4 West, of the Salt Lake Meridian, Utah.

History of Previous Surveys: The exterior boundaries of the township and a portion of the subdivisional lines, and the Bryce Canyon National Park Boundary through this township were surveyed by Elliot Bird, Associate Cadastral Engineer and Andrew Nelson, Assistant Cadastral Engineer, in 1944, as shown upon the official plat approved November 8, 1946 and was accepted February 6, 1948.

This dependent resurvey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1947 Edition, and Special Instructions dated October 11, 1972.

The direction of the lines of this survey were determined by direct altitude observations upon the sun, for azimuth, and refer to the true meridian. The lines were carried forward by normal transit traverse. Distances are expressed in chains, reduced to horizontal equivalents.

The data furnished with the special instructions give the geographic position of the cor. of secs. 32 and 33 on the south boundary of the township, as: Latitude $37^{\circ} 32.2'$ N. and Longitude $112^{\circ} 14.2'$ W. The mean magnetic declination is: $15\frac{1}{2}^{\circ}$ East.

Dependent Resurvey of a Portion of the
Bryce Canyon National Park Boundary
Township 37 South, Range 4 West
Salt Lake Meridian, Utah

A portion of the subdivisional lines and
a portion of the subdivision lines through
a number of sections

Reestablishment of the Survey Executed by
Elliot Bird, Associate Cadastral Engineer
Andrew Nelson, Assistant Cadastral Engineer
in 1944

Beginning at the cor. of secs. 32 and 33 on the south boundary of the township, which is marked with a mound of stone, 4 ft. base, 2 ft. high (record: an iron post, 2 ins. in diam.).

Dependent Resurvey of a Portion of the
Bryce Canyon National Park Boundary
Township 37 South, Range 4 West
Salt Lake Meridian, Utah

CHAINS

substantiated by:

A pine, 24 ins. in diam., bears N. 62° 00' E., 50 lks. distance (record: A yellow pine, 30 ins. in diam., bears N. 67° E., 46 lks. distance) scribed T37S R4W S33 BT.

A juniper, 12 ins. in diam., bears S. 48° 00' W., 30 lks. distance, scribed BCNP (record: 16 ins. in diam., bears S. 52° W., 31 lks. dist.).

A pine, 18 ins. in diam., bears N. 72° 30' W., 31 lks. distance, scribed BCNP (record: 24 ins. in diam., bears N. 31° W., 32 lks.).

At the corner point, the center of the mound of stone.

Set an iron post, 28 ins. long, 2½ ins. in diam., 10 ins. in the ground, and in a mound of stone, 4 ft. base, to the top, with brass cap mkd.

T37S R4W
S 32 | S 33
S 4
T38S R4W

1972

N. 0° 01' W., along the east boundary of Bryce Canyon National Park, and the west boundary of section 33

40.05 The west 1/4 sec. cor. of sec. 33 is monumented with an iron post, 1 inch in diam., firmly set, projecting 16 ins. above the surface of the ground, and in a mound of stone, 4 ft. base, to the top, with a regulation (G. L.O.) brass cap mkd.

B C N P
| 1/4 S 33

1944

substantiated by:

A juniper, 6 ins. in diam., bears S. 5° 00' E., 56 lks. distance, scribed 1/4 S33 BT (record: 8 ins. in diam., and 66 lks. distance).

A pine, 20 ins. in diam., bears N. 10° 00' W., (record: N. 10° E.) 35 lks. distance, scribed B C N P.

N. 89° 55' E., on the east and west center line of sec. 33

Dependent Resurvey of a Portion of the
Bryce Canyon National Park Boundary
Township 37 South, Range 4 West
Salt Lake Meridian, Utah

CHAINS

40.04 The center 1/4 sec. cor. of sec. 33 is monumented with an iron post, 1 inch in diam., firmly set, projecting 26 ins. above the surface of the ground, and in a mound of stone, 5 ft. base, 2 ft. high, with a regulation (G.L.O.) brass cap mkd.

B C N P
C 1/4 S 33

1944

substantiated by:

A pine, 20 (record: 26) ins. in diam., bears N. 10° 30' E., 33 lks. distance, scribed B C N P.

A pine, 14 ins. in diam., bears S. 76° 00' E., 99 lks. distance (record: bears S. 72° 30' E., 97 lks. distance) scribed C 1/4 S33 BT.

N. 89° 55' E., beginning new measurement

40.09 The 1/4 sec. cor. of secs. 33 and 34 is monumented with an iron post, 1 inch in diam., firmly set, projecting 12 ins. above the surface of the ground, with a regulation (G.L.O.) brass cap mkd.

B C N P | 1/4
S 34
S 33

1944

substantiated by:

A fir, 12 ins. in diam., bears NORTH, 90 lks. distance (record: bears N. 58° E., 91 lks. dist.) scribed S34 BT.

A pine, 12 ins. in diam., bears N. 34° 00' W., (record: N. 42° W.) 87 lks. distance, scribed B C N P.

N. 0° 07' E., along the west boundary of sec. 34

40.00 The northwest sec. cor. of sec. 34 is monumented with an iron post, 2 ins. in diam., firmly set, projecting 26 ins. above the surface of the ground, and in a mound of stone, 3 ft. base, 18 ins. high, with a regulation (G.L.O.) brass cap mkd.

Dependent Resurvey of a Portion of the
Bryce Canyon National Park Boundary
Township 37 South, Range 4 West
Salt Lake Meridian, Utah

CHAINS

T37S R4W
B C N P
| S 34

1944

substantiated by:

A juniper, 6 ins. in diam., bears N. 55° 00' E., 72 lks. distance (record: 12 ins. in diam., bears N. 60° E., 66 lks. distance), scribed B C N P.

A juniper, 8 ins. in diam., bears S. 73° 00' E., (record: S. 69° E.) 83 lks. distance, scribed T37S R4W S34 BT.

A juniper, 14 ins. in diam., bears S. 11° 00' W., 49 lks. distance (record: 18 ins. in diam., bears S. 14° 30' W., 53 lks. distance) scribed B C N P.

S. 89° 48' E., along the north boundary of sec. 34

39.95 The 1/4 sec. cor. of secs. 27 and 34 is monumented with an iron post, 1 inch in diam., firmly set, projecting 18 ins. above the surface of the ground, and in a mound of stone, 3 ft. base, 1 ft. high, with a regulation (G.L.O.) brass cap mkd.

B C N P | S 27
1/4 S 34

1944

substantiated by:

A pine, 28 ins. in diam., bears S. 34° 00' E., 134 lks. distance, scribed 1/4 S27 BT.

A pine, 36 ins. in diam., bears N. 22° 30' W., 163 lks. distance, scribing illegible.

N. 0° 03' W., on the north and south center line of sec. 27

39.97 The center 1/4 sec. cor. of sec. 27 is monumented with an iron post, 1 inch in diam., firmly set, projecting 19 ins. above the surface of the ground, and in a mound of stone, 3 ft. base, 14 ins. high, with a regulation (G.L.O.) brass cap mkd.

Dependent Resurvey of a Portion of the
Bryce Canyon National Park Boundary
Township 37 South, Range 4 West
Salt Lake Meridian, Utah

CHAINS

B C N P | C 1/4
 | S 27

1944

substantiated by:

A pine, 8 ins. in diam., bears S. 80° 45' E., 15
lks. distance (record: S. 83° 30' E., 14 lks. dis-
tance), scribing illegible.

A pine, 10 ins. in diam., bears N. 86° 30' W., 49
lks. distance, scribing illegible.

N. 0° 03' W., beginning new measurement

40.01 The north 1/4 sec. cor. of sec. 27 is monumented with
an iron post, 1 inch in diam., firmly set, projecting 24
ins. above the surface of the ground, and in a mound of
stone, 3 ft. base, 1 ft. high, with a regulation (G.L.O.)
brass cap mkd.

B C N P
| 1/4 S 27

1944

substantiated by:

A juniper, 16 ins. in diam., bears S. 15° 00' E., 24
lks. distance, scribed 1/4 S27 BT.

A juniper, 18 ins. in diam., bears S. 50° 00' W.,
40 lks. distance, scribed B C N P.

S. 89° 54' E., along the north boundary of sec. 27

39.88 The cor. of secs. 26 and 27 (on the north boundary of
said sections) is monumented with an iron post, 2 ins. in
diam., firmly set, projecting 12 ins. above the surface
of the ground, with a regulation (G.L.O.) brass cap mkd.

B C N P
S 27 | S 26
T37S R4W

1944

substantiated by:

A juniper, 12 ins. in diam., bears S. 82° 45' E., 96
lks. distance, scribed T37S R4W S26 BT.

A juniper, 12 ins. in diam., bears N. 72° 30' W.,
127 lks. distance, scribed B C N P.

Township 37 South, Range 4 West
Salt Lake Meridian, Utah

CHAINS

GENERAL DESCRIPTION

This dependent resurvey is of a portion of the east boundary of Bryce Canyon National Park, and being the boundary between the above park and the Dixie National Forest. The elevation varies from 7170 ft. above sea level near the cor. of secs. 26 and 27 (north boundary of said sections) to 7895 ft. above sea level near the cor. of secs. 32 and 33 on the south boundary of the township. The soil is sandy to clay shale. Timber consists of native trees: junipers, pines, and firs; undergrowth, young trees, shrub live oak, Utah service-berry, and sage.

CERTIFICATE OF SURVEY

(I) ~~(We)~~, Klaus P. Hendrix, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 11th day of October, 1972, (I) ~~(We)~~ have dependently resurveyed a portion of the Bryce Canyon National Park Boundary, being a portion of the Subdivisional lines and a portion of the subdivision lines through a number of sections, Township 37 South, Range 4 West,

of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by (me), ~~(us)~~ and under (my) ~~(our)~~ direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

January 7, 1975
(Date)

Klaus P. Hendrix
Klaus P. Hendrix (Cadastral Surveyor)

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

SUBMITTED FOR APPROVAL
Date JAN 17 1975

BUREAU OF LAND MANAGEMENT
Washington, D.C.

The foregoing field notes of the dependent resurvey of a portion of the Bryce Canyon National Park Boundary, being a portion of the subdivisional lines and a portion of the subdivision lines through a number of sections, Township 37 South, Range 4 West, of the Salt Lake Meridian, Utah executed by Klaus P. Hendrix, Cadastral Surveyor having been critically examined and found correct, are hereby approved.

DEC 19 1975
(Date)

G. J. [Signature]
Acting (Chief, Division of Cadastral Survey)

CERTIFICATE OF TRANSCRIPT

I CERTIFY That the foregoing transcript of the field notes of the above-described surveys in _____, is a true copy of the original field notes.

(Date)

(Chief, Division of Cadastral Survey) GPO 849-028

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD NOTES

OF THE

DEPENDENT RESURVEY OF A PORTION OF THE SOUTH BOUNDARY

OF THE TOWNSHIP

AND

THE SURVEY OF THE EAST BOUNDARY

OF THE

BRYCE CANYON NATIONAL PARK

TOWNSHIP 38 SOUTH, RANGE 4 WEST

10-7-8

Of the SALT LAKE Meridian,

In the State of UTAH

EXECUTED BY

GILBERT V. OLSON

CADASTRAL SURVEYOR

Under special instructions dated OCTOBER 11, 19 72, approved OCTOBER 17, 1972,

_____, which provided for the surveys included under U.S. Survey/Group
Number 545, and assignment instructions dated MAY 20, 19 74.

Survey commenced MAY 22, 19 74

Survey completed JULY 9, 19 74

INDEX DIAGRAM

Township _____, Range _____,

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Blank

Page

Township 38 South, Range 4 West
Salt Lake Meridian, Utah

CHAINS

The following field notes are those of the dependent resurvey of a portion of the south boundary of the township, and the survey of the east boundary of the Bryce Canyon National Park, Township 38 South, Range 4 West, of the Salt Lake Meridian, Utah.

History of Previous Surveys: The south boundary was surveyed by Leo A. Snow, U. S. Deputy Surveyor, in 1908, as the north boundary of Township 39 South, Range 4 West, and shown upon the official plat of that township, approved June 25, 1909. The north boundary was surveyed by Elliot Bird, Associate Cadastral Engineer and Andrew Nelson, Assistant Cadastral Engineer, in 1944, as the south boundary of Township 37 South, Range 4 West, and shown upon the official plat of that township, approved November 8, 1946 and was accepted February 6, 1948. A portion of the north boundary was retraced, a portion of the east boundary was dependently resurveyed, and a portion of the subdivisional lines were surveyed by Robert C. Yundt, Cadastral Engineer, in October 1950, as shown upon the official plat accepted July 9, 1952. A portion of the south and east boundaries were dependently resurveyed, and a portion of the subdivisional lines were surveyed by Jay L. Hyatt and H. Dennis Badger, Cadastral Surveyors, in 1970, as shown upon the official plat accepted July 11, 1973.

This dependent resurvey and survey were executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1973 Edition, and the Special Instructions, dated October 11, 1972.

The direction of all lines of this survey was determined by observations upon polaris for azimuth, and refer to the true meridian. The lines were carried forward by normal transit traverse. Distances are expressed in chains, reduced to horizontal equivalents.

The data furnished with the special instructions give the geographic position of the cor. of secs. 34 and 35 on the south boundary of the township, as: Latitude $37^{\circ} 27.0' N.$ and Longitude $112^{\circ} 12.0' W.$ The mean magnetic declination is: $15\frac{1}{2}^{\circ}$ East.

Dependent Resurvey of a Portion
of the South Boundary
Township 38 South, Range 4 West
Salt Lake Meridian, Utah

Reestablishment of the Survey Executed by
Leo A. Snow, U. S. Deputy Surveyor
in 1908

Dependent Resurvey of a Portion
of the South Boundary
Township 38 South, Range 4 West
Salt Lake Meridian, Utah

CHAINS

Beginning at the cor. of secs. 34 and 35, Tp. 38 S., R. 4 W., which is monumented with an iron post, 2½ ins. in diam., firmly set, projecting 18 ins. above the surface of the ground, in a mound of stone, 3 ft. base, 1 ft. high, with brass cap mkd.

T38S R4W
S 34 | S 35
S 1
T39S R4W

1970

substantiated by;

A pine, 10 ins. in diam., bears N. 62° 45' E., 66 lks. distance, scribed T38S R4W S35 BT.

A juniper, 15 ins. in diam., bears N. 12° 45' W., 38 lks. distance, scribed T38S R4W S34 BT.

S. 89° 46' W., along the south boundary of Township 38 South, Range 4 West, and the south boundary of sec. 34

Ascend over steep east slope, through juniper and pine.

- 4.10 Ridge, bears north and south, descend over west slope.
- 25.90 Draw, drains south, ascend over east slope.
- 26.90 Ridge, bears north and south, descend over west slope.
- 28.40 Draw, drains south, ascend over steep rocky east slope.
- 39.98 The south 1/4 sec. cor. of sec. 34 is monumented with a sandstone, 18 x 12 x 4 ins., firmly set 12 ins. in the ground, with 1/4 on the north.

substantiated by:

A pine, 14 ins. in diam., bears S. 9° 30' E., 28 lks. distance, scribed 1/4 S2 BT.

A pine, 8 ins. in diam., bears N. 62° 00' W., 85 lks. distance, (record: 31 lks.) scribed 1/4 S34 BT.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. in diam., 26 ins. in the ground, with brass cap mkd.

T38S R4W
1/4 S 34

1974

Dependent Resurvey of a Portion
of the South Boundary
Township 38 South, Range 4 West
Salt Lake Meridian, Utah

CHAINS

Deposit the sandstone monument alongside the iron post.

S. 89° 47' W., beginning new measurement

Ascend over east slope, through juniper and pine.

- 3.50 Enter dense buck brush and scrub oak.
- 26.30 Ridge spur, slopes southeast, descend over southwest slope.
- 39.50 Small draw, drains, southwest, ascend over southeast slope.
- 40.26 The cor. of secs. 33 and 34 is monumented with a sandstone, 24 x 12 x 3 ins., firmly set 12 ins. in the ground, mkd. with 3 grooves on the east and west.

substantiated by:

A juniper, 12 ins. in diam., bears N. 3° 00' W., 32 lks. distance, (record: 21 lks.) scribing illegible.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. in diam., 12 ins. in the ground, in a mound of stone, 3 ft. base, 1½ ft. high, with brass cap mkd.

T38S R4W
S 33 | S 34
S 2
T39S R4W

1974

Deposit the sandstone monument alongside the iron post.

This corner is located on a steep south slope.

N. 89° 51' W., along the south boundary of sec. 33

Descend over southwest slope, through juniper and pine.

- 6.90 Draw, drains southeast, ascend over east slope, through juniper, pine, and scattering scrub oak.
- 27.20 Ridge, bears north and south, descend over steep rocky west slope, through dense scrub oak, and scattering juniper.

Dependent Resurvey of a Portion
of the South Boundary
Township 38 South, Range 4 West
Salt Lake Meridian, Utah

CHAINS

39.83 The point for the south 1/4 sec. cor. of sec. 33 is determined at proportionate distance; there is no evidence of the original corner.

Set an iron post, 28 ins. long, 2½ ins. in diam., 26 ins. in the ground, with brass cap mkd.

T38S R4W
1/4 S 33

1974

from which

A juniper, 10 ins. in diam., bears S. 43° 45' E., 55 lks. distance, scribed XBT.

A juniper, 10 ins. in diam., bears N. 70° 30' W., 53 lks. distance, scribed 1/4 S33 BT.

51.40 Draw, drains south.

67.20 Spur, slopes south, descend over southwest slope.

79.66 The cor. of secs. 32 and 33 is monumented with a limestone, 18 x 10 x 3 ins., with the top set flush with the surface of the ground, marking illegible.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.

T38S R4W
S 32 | S 33
S 3
T39S R4W

1974

Deposit the limestone monument alongside the iron post.

from which

An oak, 8 ins. in diam., bears N. 49° 45' E., 58 lks. distance, scribed T38S R4W S33 BT.

A pine, 12 ins. in diam., bears N. 33° 15' W., 56 lks. distance, scribed T38S R4W S32 BT.

Discontinue the dependent resurvey of this township line at this corner.

Survey of the Bryce Canyon National Park Boundary
in the Unsurveyed Portion of
Township 38 South, Range 4 West
Salt Lake Meridian, Utah

CHAINS

From the south 1/4 sec. cor. of sec. 33, heretofore described

N. 0° 03' W., along the east boundary of Bryce Canyon National Park.

Ascend along steep rocky west slope, through juniper and scattering pine.

27.70 Spur, slopes west.

40.00 The point for the zero (0) Mile Post plus 40.00 chs.

Set an iron post, 28 ins. long, 2½ ins. in diam., 26 ins. in the ground, with brass cap mkd.

B C N P
O M P | PL
+40.00 CHS |

1974

from which

A pine, 6 ins. in diam., bears N. 71° 30' E., 36 lks. distance, scribed B C N P BT.

A pine, 4 ins. in diam., bears N. 80° 15' W., 26 lks. distance, scribed B C N P BT.

This corner is located in dense scrub oak and 100 lks. south of a small draw, which drains west.

S. 89° 51' E., continue along the Bryce Canyon National Park boundary

Ascend over steep rocky west slope, through scrub oak and juniper.

6.80 Ridge, bears north and south, descend over east slope.

15.80 Draw, drains south, ascend over west slope.

22.00 Spur, slopes south, descend over east slope.

39.83 The point for the zero (0) Mile Post plus 79.83 chs.

Set an iron post, 28 ins. long, 2½ ins. in diam., 18 ins. in the ground, and in a small mound of stone, with brass cap mkd.

B C N P
O M P
+79.83 CHS
PL

1974

Survey of the Bryce Canyon National Park Boundary
in the Unsurveyed Portion of
Township 38 South, Range 4 West
Salt Lake Meridian, Utah

CHAINS

from which

A juniper, 10 ins. in diam., bears S. 0° 15' W., 44 lks. distance, scribed PL O M P + 79.83 BT.

A pine, 14 ins. in diam., bears S. 72° 00' W., 123 lks. distance, scribed PL O M P + 79.83 BT.

A juniper, 12 ins. in diam., bears N. 4° 00' W., 66 lks. distance, scribed B C N P O M P + 79.83 BT.

From this corner the cor. of secs. 33 and 34 on the south boundary of the township (heretofore described) bears S. 0° 03' E., 40.00 chs. distance.

This corner is located on a ridge that bears northwest and southeast.

N. 89° 54' E., continue along the Bryce Canyon National Park boundary

Descend over east slope, through scrub oak and buck brush.

14.30 Small draw, drains southeast, ascend over southwest slope, through juniper.

20.13 The point for the one (1) Mile Post plus 19.96 chs.

Set an iron post, 28 ins. long, 2½ ins. in diam., 22 ins. in the ground, and in a collar of stone, with brass cap mkd.

B C N P	
1 M P	
+19.96 CHS	PL

1974

This corner is located on a spur, slopes southeast.

N. 0° 03' W., continue along the Bryce Canyon National Park boundary

Descend over steep northeast slope, through dense scrub oak and buck brush.

14.40 Draw, drains east, ascend over south slope, through scattering pine.

18.60 Spur, slopes southeast, descend over northeast slope.

21.50 Draw, drains southeast, ascend over south slope.

40.00 The point for the one (1) Mile Post plus 59.96 chs.

Set an iron post, 28 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.

Survey of the Bryce Canyon National Park Boundary
in the Unsurveyed Portion of
Township 38 South, Range 4 West
Salt Lake Meridian, Utah

CHAINS

B C N P |
1 M P | PL
+59.96 CHS |

1974

from which

A pine, 11 ins. in diam., bears N. 44° 15' E., 76
lks. distance, scribed PL 1 MP + 59.96 BT.

A pine, 18 ins. in diam., bears S. 25° 45' E., 14
lks. distance, scribed PL 1 MP + 59.96 BT.

A pine, 6 ins. in diam., bears N. 68° 45' W., 71
lks. distance, scribed B C N P BT.

N. 0° 03' W., continue along the Bryce Canyon National
Park boundary

Ascend along steep broken east slope through pine, juni-
per, scrub oak, and scattering pine.

- 2.20 Ridge, bears southeast and northwest, descend along east
slope.
- 14.30 Draw, drains east, ascend over southeast slope.
- 24.40 Spur, slopes east, ascend over northeast slope.
- 35.10 Draw, drains east, ascend along broken east slope.
- 40.00 The point for the two (2) Mile Post plus 19.96 chs.

Set an iron post, 28 ins. long, 2½ ins. in diam., 26 ins.
in the ground, with brass cap mkd.

B C N P |
2 M P | PL
+19.96 CHS |

1974

from which

A fir, 15 ins. in diam., bears S. 2° 15' W., 77
lks. distance, scribed B C N P 2 MP + 19.96 BT.

This corner is located as the base of a steep slope which
bears northwest and southeast.

N. 0° 03' W., continue along the Bryce Canyon National
Park boundary

Ascend over steep rocky southwest slope, through juniper
and pine.

- 12.40 Ridge, bears southeast and northwest.

Survey of the Bryce Canyon National Park Boundary
in the Unsurveyed Portion of
Township 38 South, Range 4 West
Salt Lake Meridian, Utah

CHAINS

23.80 Ridge, bears east and west, descend along broken east slope.

40.00 The point for the two (2) Mile Post plus 59.96 chs.

Set an iron post, 28 ins. long, 2½ ins. in diam., 4 ins. in the ground, to bedrock, in a mound of stone, 4 ft. base, 2 ft. high, with brass cap mkd.

B C N P |
2 M P | PL
+59.96 CHS |

1974

from which

A pine, 20 ins. in diam., bears N. 39° 15' E., 97 lks. distance, scribed PL 2 MP + 59.96 BT.

A pine, 20 ins. in diam., bears N. 35° 45' W., 52 lks. distance, scribed B C N P 2 MP + 59.96 BT.

This corner is located on the left bank of dry wash which drains east.

N. 0° 03' W., continue along the Bryce Canyon National Park boundary

Over nearly level land, through large pine.

9.50 Draw within Bull Valley, drains east, ascend over south-east slope.

29.90 Ridge, bears east and west, descend over north slope.

40.00 The point for the three (3) Mile Post plus 19.96 chs.

Set an iron post, 28 ins. long, 2½ ins. in diam., 26 ins. in the ground, with brass cap mkd.

B C N P |
3 M P | PL
+19.96 CHS |

1974

from which

A pine, 30 ins. in diam., bears S. 8° 15' W., 47 lks. distance, scribed B C N P 3 MP + 19.96 BT.

An oak, 5 ins. in diam., bears S. 55° 30' W., 71 lks. distance, scribed XBT.

This corner is located 29 lks. north of a small draw, drains northwest.

Survey of the Bryce Canyon National Park Boundary
in the Unsurveyed Portion of
Township 38 South, Range 4 West
Salt Lake Meridian, Utah

CHAINS

N. 0° 03' W., continue along the Bryce Canyon National Park boundary

Descend over steep north slope, through scrub oak and scattering fir and juniper.

10.70 Draw, drains northeast; thence, along steep east slope.

40.00 The point for the three (3) Mile Post plus 59.96 chs.

Set an iron post, 28 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.

B C N P	PL
3 M P	
+59.96 CHS	

1974

from which

A juniper, 6 ins. in diam., bears N. 10° 00' E., 42 lks. distance, scribed XBT.

A juniper, 12 ins. in diam., bears S. 71° 30' E., 50 lks. distance, scribed PL 3 MP + 59.96 BT.

WEST, continue along the Bryce Canyon National Park boundary

Ascend over steep east slope, through juniper and pine.

8.20 Ridge spur, slopes northeast, descend over northwest slope.

13.10 Small draw, drains north.

18.40 Ridge spur, slopes north, descend over northwest slope.

20.13 The point for the four (4) Mile Post plus 0.09 chs.

Set an iron post, 28 ins. long, 2½ ins. in diam., 26 ins. in the ground, with brass cap mkd.

PL	
B C N P	
4 M P	
+0.09 CHS	

1974

from which

A pine, 10 ins. in diam., bears N. 52° 30' W., 25 lks. distance, scribed PL 4 MP + 0.09 BT.

This corner is located on steep rocky northwest slope, in scattering juniper.

Survey of the Bryce Canyon National Park Boundary
in the Unsurveyed Portion of
Township 38 South, Range 4 West
Salt Lake Meridian, Utah

CHAINS

WEST, continue along the Bryce Canyon National Park boundary

Descend over steep rocky northwest slope, through scattering juniper.

16.80 Draw, drains north, ascend over east slope.

27.50 Ridge spur, slopes north, descend over west slope.

38.00 Base at descent, bears northeast and southwest, thence, over nearly level land, through scrub oak.

40.00 The point for the four (4) Mile Post plus 40.09 chs.

Set an iron post, 28 ins. long, 2½ ins. in diam., 26 ins. in the ground, with brass cap mkd.

$$\begin{array}{r} \text{PL} \\ \hline \text{B C N P} \\ 4 \text{ M P} \\ +40.09 \text{ CHS} \end{array}$$

1974

from which

An oak, 5 ins. in diam., bears S. 9° 15' E., 126 lks. distance, scribed XBT.

A fir, 12 ins. in diam., bears N. 81° 45' W., 72 lks. distance, scribed PL 4 MP + 40.09 BT.

WEST, continue along the Bryce Canyon National Park boundary

Over nearly level land, through scrub oak.

8.70 Begin ascending over steep east slope.

12.80 Spur, slopes north, descend over northwest slope.

21.40 Base of descent, bears northeast and southwest, thence, over nearly level land, with a series of small washes draining northeast.

30.60 Trail road, bears northwest and south.

40.00 The point for the five (5) Mile Post plus 0.09 chs.

Set an iron post, 28 ins. long, 2½ ins. in diam., 26 ins. in the ground, with brass cap mkd.

$$\begin{array}{r} \text{PL} \\ \hline \text{B C N P} \\ 5 \text{ M P} \\ +0.09 \text{ CHS} \end{array}$$

1974

Survey of the Bryce Canyon National Park Boundary
in the Unsurveyed Portion of
Township 38 South, Range 4 West
Salt Lake Meridian, Utah

CHAINS

from which

A pine, 12 ins. in diam., bears S. 51° 15' W., 46
lks. distance, scribed B C N P 5 MP + 0.09 BT.

A pine, 14 ins. in diam., bears N. 18° 45' W., 49
lks. distance, scribed PL 5 MP + 0.09 BT.

WEST, continue along the Bryce Canyon National Park
boundary

Over nearly level land, through large pines.

- 13.70 Ascend over southeast slope, through large aspen trees.
- 31.60 Ridge, bears northeast and southwest, thence, along north
slope. Leave aspen and enter mixed pine, juniper, fir,
and scrub oak.
- 40.00 The point for the five (5) Mile Post plus 40.09 chs.
Set an iron post, 28 ins. long, 2½ ins. in diam., 24 ins.
in the ground, with brass cap mkd.

| PL
B C N P
5 M P
+40.09 CHS

1974

from which

A pine, 10 ins. in diam., bears N. 24° 45' E., 21
lks. distance, scribed PL 5 MP + 40.09 BT.

A pine, 20 ins. in diam., bears S. 55° 30' W., 83
lks. distance, scribed B C N P 5 MP + 40.09 BT.

N. 0° 04' W., continue along the Bryce Canyon National
Park boundary

Descend over gentle northeast slope, through fir, pine,
and aspen.

- 5.40 Draw, drains northeast, continue to ascend over north-
east slope.
- 21.30 Small spur, slopes east, ascend along east slope.
- 32.10 Ridge, bears northeast and southwest, descend over north
slope.
- 40.00 The point for the six (6) Mile Post plus 0.09 chs.
Set an iron post, 28 ins. long, 2½ ins. in diam., 26 ins.
in the ground, with brass cap mkd.

Survey of the Bryce Canyon National Park Boundary
in the Unsurveyed Portion of
Township 38 South, Range 4 West
Salt Lake Meridian, Utah

CHAINS

B C N P |
6 M P | PL
+0.09 CHS |

1974

from which

A pine, 8 ins. in diam., bears S. 86° 30' E., 33 lks. distance, scribed PL 6 MP + 0.09 BT.

A fir, 6 ins. in diam., bears S. 62° 30' W., 18 lks. distance, scribed B C N P 6 MP + 0.09 BT.

N. 0° 04' W., continue along the Bryce Canyon National Park boundary

Descend over north slope.

- 0.50 Base of descent, bears northeast and southwest, thence, over nearly level land, through large pines.
 - 4.00 Draw, drains east.
 - 10.60 Ascend over broken south slope, through pine and scattering juniper.
 - 19.70 Spur, slopes east, thence, along broken east slope.
 - 26.80 Spur, slopes east, descend over north slope.
 - 40.00 The point for the six (6) Mile Post plus 40.09 chs.
- Set an iron post, 28 ins. long, 2½ ins. in diam., 26 ins. in the ground, with brass cap mkd.

B C N P |
6 M P | PL
+40.09 CHS |

1974

from which

A pine, 8 ins. in diam., bears N. 29° 15' E., 24 lks. distance, scribed PL 6 MP + 40.09 BT.

A fir, 8 ins. in diam., bears S. 89° 45' W., 24 lks. distance, scribed B C N P BT.

N. 0° 04' W., continue along the Bryce Canyon National Park boundary

Over nearly level land crossing a series of small draws, which drain east.

Survey of the Bryce Canyon National Park Boundary
in the Unsurveyed Portion of
Township 38 South, Range 4 West
Salt Lake Meridian, Utah

CHAINS

25.20 Ascend over steep south slope.

40.00 The point for the seven (7) Mile Post plus 0.09 chs.

Set an iron post, 28 ins. long, 2½ ins. in diam., 6 ins. in the ground, in a mound of stone, 3 ft. base, 2 ft. high, with brass cap mkd.

B C N P |
7 M P | PL
+0.09 CHS |

1974

from which

A juniper, 8 ins. in diam., bears N. 55° 00' E., 45 lks. distance, scribed PL 7 MP 0.09 BT.

N. 0° 04' W., continue along the Bryce Canyon National Park boundary

0.30 Ridge, bears east and west, descend over broken north slope.

9.40 Base of descent, bears northwest and northeast, thence, over nearly level land, crossing a series of small draws, which drains northeast.

40.00 The point for the seven (7) Mile Post plus 40.09 chs.

Set an iron post, 28 ins. long, 2½ ins. in diam., 26 ins. in the ground, with brass cap mkd.

B C N P | PL
7 M P |
+40.09 CHS |

1974

from which

A fir, 4 ins. in diam., bears S. 80° 30' E., 74 lks. distance, scribed XBT.

A pine, 6 ins. in diam., bears S. 20° 30' W., 61 lks. distance, scribed B C N P BT.

EAST, continue along the Bryce Canyon National Park boundary

Over nearly level land, crossing a series of small draws which drains northeast.

24.50 Ascend over steep northwest slope, through dense scrub oak.

Survey of the Bryce Canyon National Park Boundary
in the Unsurveyed Portion of
Township 38 South, Range 4 West
Salt Lake Meridian, Utah

CHAINS

30.10 Spur, slopes north.

38.50 Spur, slopes north.

40.00 The point for the eight (8) Mile Post plus 0.09 chs.

Set an iron post, 28 ins. long, 2½ ins. in diam., 26 ins. in the ground, with brass cap mkd.

B C N P	
8 M P	PL
<u>+0.09 CHS</u>	

1974

from which

A fir, 15 ins. in diam., bears S. 32° 30' E., 34 lks. distance, scribed PL 8 MP + 0.09 BT.

A fir, 12 ins. in diam., bears S. 64° 00' W., 35 lks. distance, scribed PL 8 MP + 0.9 BT.

N. 0° 04' W., continue along the Bryce Canyon National Park boundary

Descend over northeast slope, through scrub oak.

10.00 Base of descent, bears east and southwest; thence, over nearly level land crossing a series of draws, which drains east.

28.00 Ascend over steep rocky southeast slope, through juniper.

40.00 The point for the eight (8) Mile Post plus 40.09 chs.

Set an iron post, 28 ins. long, 2½ ins. in diam., 26 ins. in the ground, with brass cap mkd.

B C N P	
8 M P	PL
<u>+40.09 CHS</u>	

1974

from which

A pine, 15 ins. in diam., bears S. 23° 45' W., 42 lks. distance, scribed B C N P 8 MP 40.09 BT.

A pine, 5 ins. in diam., bears S. 85° 00' W., 15 lks. distance, scribed B C N P BT.

N. 0° 04' W., continue along the Bryce Canyon National Park boundary

Ascend over south slope, through scattering pine.

Survey of the Bryce Canyon National Park Boundary
in the Unsurveyed Portion of
Township 38 South, Range 4 West
Salt Lake Meridian, Utah

CHAINS

- 14.10 Top of peak, descend over northeast slope.
- 29.30 Small spur, slopes east.
- 36.70 Draw, drains east, ascend over south slope.
- 41.77 Intersect the north boundary of the township, the point for the closing corner for the east boundary of Bryce Canyon National Park.
- Set an iron post, 28 ins. long, 2½ ins. in diam., 24 ins. in the ground, with brass cap mkd.

T37S R4W
 S 32
B C N P|PL
 C C
T38S R4W

1974

From this closing corner the cor. of secs. 32 and 33 Tp. 37 S., R. 4 W., bears EAST, 5.46 chs. distance, which is monumented with an iron post, 2½ ins. in diam., set, marked, and witnessed as described in the field-note record of the dependent resurvey of the Bryce Canyon National Park boundary, Tp. 37 S., R. 4 W., executed concurrently with this group.

From this same closing corner, the 1/4 sec. cor. of secs. 5 and 32, bears WEST, 35.04 chs. distance, which is monumented with an iron post, 1 inch in diam., firmly set, projecting 4 ins. above the surface of the ground, with a regulation (G. L. O.) brass cap mkd.

1/4 $\frac{S\ 32}{S\ 5}$

1944

substantiated by:

A pine, 8 ins. in diam., bears S. 48° 15' E., 50 lks. distance, scribing face overgrown.

A fir, 8 ins. in diam., bears S. 55° 30' W., 35 lks. distance, scribing face overgrown.

I designate this corner to function for the south 1/4 sec. cor. of sec. 32 only, and re-marked the brass cap, as:

T37S R4W
 1/4 S 32

1974

Township 38 South, Range 4 West
Salt Lake Meridian, Utah

CHAINS

GENERAL DESCRIPTION

This survey of the east boundary of Bryce Canyon National Park is identical with the west boundary of the Dixie National Forest, through this township. The elevation varies from 7260 ft. above sea level along the (east 1/2 mile) south boundary of section 34 to 8224 ft. above sea level near station 7 MP + 0.09 CHS. The soil is sandy to clay shale. Timber consists of native trees: junipers, pines, and firs: undergrowth, young trees, shrub live oak, Utah service-berry, and sage.

R0594

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

///

FIELD ASSISTANTS

NAMES	CAPACITY
Russel E. Cavanaugh	Surveying Aid
Jerry A. Smith	Surveying Aid
David L. Foster	Surveying Aid
Larry A. Walter	Surveying Aid

CERTIFICATE OF SURVEY

(1) ~~(M)~~, Gilbert V. Olson

CERTIFY upon honor that, in pursuance of special instructions bearing date of the
of October 19 72, (1) ~~(M)~~ have dependently resurveyed a
the south boundary of the township, and surveyed the east bound
Bryce Canyon National Park, Township 38 South, Range 4 West,

of the Salt Lake Meridian, in the State of Utah

are represented in the foregoing field notes as having been executed by (me), ~~(us)~~ a
(all) direction, and that said survey has been made in strict conformity with said sp
tions, the Manual of Instructions for the Survey of the Public Lands of the United
specific manner described in the foregoing field notes.

January 7, 1974

(Date)

GILBERT V. OLSON
(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

FORWARDED FOR APPROVAL

JAN 11 1975

BUREAU OF LAND M
Washington, D.C.

The foregoing field notes of the dependent resurvey of a portion of t

boundary of the township, and the survey of the east boundary
Canyon National Park, Township 38 South, Range 4 West, of the

Meridian, Utah

executed by Gilbert V. Olson, Cadastral Surveyor

having been critically examined and found correct, are hereby approved.

DEC 10 1975

(Date)

A. King (Chief, Division of Cadastral Surv

CERTIFICATE OF TRANSCRIPT

I CERTIFY That the foregoing transcript of the field notes of the above-descr

, is a true copy of the orig

(Date)

(Chief, Division of Cadastral Surv

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

ORIGINAL
FIELD NOTES

OF THE

CORRECTIVE RESURVEY

OF

THE SECTION LINE BETWEEN SECTIONS 18 AND 19

TOWNSHIP 40 SOUTH, RANGE 16 WEST

1741

Of the SALT LAKE Meridian,

In the State of UTAH

EXECUTED BY

GLEN B. HATCH

SUPERVISORY CADASTRAL SURVEYOR

Under special instructions dated DECEMBER 7, 1967, approved DECEMBER 8, 1967,
AND SUPPLEMENTAL INSTRUCTIONS DATED JANUARY 8, 1974, APPROVED JANUARY 8, 1974

_____, which provided for the surveys included under U.S. Survey/Group

Number 495, and assignment instructions dated DECEMBER 15, 1968.
JANUARY 10 74

Survey commenced JANUARY 28, 1974

Survey completed JANUARY 29, 1974

INDEX DIAGRAM

Township 40 S, Range 16 W

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
1					
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Township 40 South Range 16 West

CHAINS

The following field notes are those of the corrective resurvey of the section line between sections 18 and 19, T. 40 S., R. 16 W., Salt Lake Meridian, Utah.

The W. bdy. and the subdivisional lines were surveyed by T.C. Bailey and J.G. Burrill, Deputy Surveyors, in 1877. The north 4 miles of the W. Bdy. were retraced by John H. Clark, Deputy Surveyor, in 1905. The W. Bdy. and the subdivisional lines were dependently resurveyed by Glen B. Hatch, Cadastral Surveyor, in 1968-69.

The corrective resurvey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1947, and Supplemental Special Instructions dated January 8, 1974.

The direction of the line of this corrective resurvey was determined by reference to the true meridian established on line by altitude observations on the sun. The distances were determined by chaining and traverse.

The geographic position of the corner of secs. 17, 18, 19 and 20 is at latitude $37^{\circ} 18' 06''$ N. and longitude $113^{\circ} 40' 45''$ W., as computed from a tie made to U.S.G.S. triangulation station "Veyo Volcano", at latitude $37^{\circ} 18' 58.700''$ N. and longitude $113^{\circ} 41' 43.688''$ W., located N. $41^{\circ} 38' 30''$ W., 109.02 chs. dist. from the cor. of secs. 17, 18, 19 and 20.

The magnetic declination was found to be $15^{\circ} 30'$ E.

Corrective Resurvey of the Section Line Between Sections 18 and 19, T. 40 S., R. 16 W., Salt Lake Meridian, Utah

Reestablishment of the Survey Executed by T. C. Bailey and J. G. Burrill, Deputy Surveyors, in 1877, and the Corrective Resurvey Superseding the Dependent Resurvey Executed by Glen B. Hatch, Supervisory Cadastral Surveyor, in 1968-69.

Beginning at the cor. of secs. 17, 18, 19 and 20, monumented with an iron post, $2\frac{1}{2}$ ins. diam., extending 8 ins. above ground, and in a collar of stone, with brass cap mkd.

T40S R16W
S18|S17
S19|S20
 1969

From this cor., U.S.G.S. triangulation station "Veyo Volcano", bears N. $41^{\circ} 38' 30''$ W., 109.02 chs. dist., monumented with a standard brass tablet set in solid stone, and mkd. "Veyo Volcano 1954".

Thence,

N. $89^{\circ} 42'$ W., bet. secs. 18 and 19.

Over gently rolling land through sagebrush.

8.00 Enter dense timber, bears SE. and curves W.

22.20 Small spur, slopes NW.

30.20 Wash, drains N.

Corrective Resurvey of the Section Line Between Secs. 18 and 19,

T40S R16W Salt Lake Terr. 1869

CHAINS

40.47 Point for the $\frac{1}{4}$ sec. cor. of secs. 18 and 19, determined by the cor. of an old property line fence, bearing N. and W. This point is recognized and used by local landowners and surveyors as being the cor. point, and is harmoniously related to existing original cors. and to old property line fences located within sec. 18, and is accepted as the best existing evidence of the position of the original cor.

From this point, the original $\frac{1}{4}$ sec. cor. monument bears S. 55° E., 0.11 chs. dist., which is a sandstone, 24x10x8 ins., plainly mkd. $\frac{1}{4}$ on one face, and lying on a mound of stone used as an anchor for above mentioned fence cor.

From the same point, the proportionate point for the $\frac{1}{4}$ sec. cor. of secs. 18 and 19, as determined in the 1968-69 resurvey, bears N. $25^{\circ} 16'$ E., 1.71 chs. dist., monumented with an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., firmly set in a mound of stone, 3 ft. base to top, with brass cap mkd.

T40S R16W
 $\frac{1}{4}$ $\frac{S18}{S19}$
 1969

This position will no longer function as the $\frac{1}{4}$ sec. cor. point, and was reestablished as follows:

At the cor. of old fences, and point for the $\frac{1}{4}$ sec. cor. of secs. 18 and 19.

Reset the above mentioned iron post, 18 ins. in the ground to bedrock, and in a mound of stone, 4 ft. base to top, and add 1974 to the brass cap markings. Bury the original cor. stone alongside the iron post.

 N. $86^{\circ} 32'$ W., beginning new measurement.

Asc. over NE. slope, along N. side of property line fence.

- 18.35 Top of low rocky ridge, bears N. and S.; end of fence bears S. 1.00 ch. dist.; desc. over ledgy W. slope.
- 21.65 Base of ridge, bears N. and S.; leave timber, thence over nearly level land.
- 30.95 Trail road, bears N. 10° E. and S. 10° W.
- 33.50 E. edge of water storage pond, bears S. and curves W., thence by traverse.
- 39.08 Point for the cor. of secs. 13, 18, 19 and 24, on the W. bdy. of the Tp. falls in storage pond. From this point, the witness cor. of secs. 13, 18, 19 and 24, bears N. $0^{\circ} 55'$ E., 4.17 chs. dist., monumented with an iron post, $2\frac{1}{2}$ ins. diam., extending 6 ins. above ground, with a mound of stone, $2\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, W. of cor., and brass cap mkd.


T40S
 R17W R16W
 $\frac{S13|S18}{S24|S19}$
 W C
 1969

CERTIFICATE OF SURVEY

(I) ~~XXX~~ Glen B. Hatch , HEREBY
CERTIFY upon honor that, in pursuance of ^{supplemental} special instructions bearing date of the 8th day
of January , 19 74 , (I) ~~(XXX)~~ have made a corrective resurvey of the
section line between sections 18 and 19, T. 40 S., R. 16 W.,

of the Salt Lake Meridian, in the State of Utah , which
are represented in the foregoing field notes as having been executed by (me), ~~(XXX)~~ and under (my)
~~(XXX)~~ direction; and that said survey has been made in strict conformity with said special instruc-
tions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in
specific manner described in the foregoing field notes.

January 31, 1974
(Date)

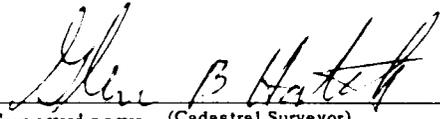
Supervisory (Cadastral Surveyor)

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

SUBMITTED FOR APPROVAL
Date FEB 1 1975

BUREAU OF LAND MANAGEMENT
Washington, D.C.

The foregoing field notes of the corrective resurvey of the section line between
sections 18 and 19, T. 40 S., R. 16 W., Salt Lake Meridian, Utah

executed by Glen B. Hatch, Supervisory Cadastral Surveyor
having been critically examined and found correct, are hereby approved.

JAN 9 1975
(Date)


(Chief, Division of Cadastral Survey)

CERTIFICATE OF TRANSCRIPT

~~I CERTIFY That the foregoing transcript of the field notes of the above described surveys in
is a true copy of the original field notes.~~

~~(Date)~~

~~(Chief, Division of Cadastral Survey)~~

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
ORIGINAL

160-1
2

FIELD NOTES

OF THE

DEPENDENT RESURVEY OF A

PORTION OF THE NORTH AND EAST BOUNDARIES

AND

A PORTION OF THE SUBDIVISIONAL LINES OF

TOWNSHIP 25 SOUTH, RANGE 2 WEST

[Lined area for notes]

Of the SALT LAKE Meridian,

In the State of UTAH

EXECUTED BY

Jerry L. Thomas Supervisory Cadastral Surveyor

Under special instructions dated June 16, 19 72, which provided for the surveys
included under Group Number 539, approved June 19, 1972,
and assignment instructions dated June 20, 19 72.

Survey commenced July 5, 19 72

Survey completed September 27, 19 72

INDEX DIAGRAM

Township 25 South, Range 2 West

			9	7	5
6	5	4	31 3	23 2	16 1 4
			30	22	15
7	8	9	27 10	20 11	14 12 3
		35	29	19	13
18	17	34 16	26 15	18 14	11 13 2
		33	25	18	10
19	20	21	22	18 23	24
30	29	28	27	26	25
31	32	33	34	35	36

Township 25 South, Range 2 West

CHAINS

The following field notes are those of the dependent resurvey of a portion of the east and north boundaries, and a portion of the subdivisional lines of T. 25 S., R. 2 W. The dependent resurvey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1947, and Special Instructions for Group No. 539, Utah, dated June 16, 1972.

T. 25 S., R. 2 W.History of Surveys

<u>Surveyed by</u>	<u>Retr. or Resurveyed by</u>
--------------------	-------------------------------

NORTH BOUNDARY

E. 2 miles	A. P. Hanson	1891	
W. 4 miles	H. D. Page & G. C. Swan	1897	
E. 2 miles			H. D. Page & G. C. Swan 1897

SOUTH BOUNDARY (Fifth Standard Parallel South)

E. 3 miles	A. P. Hanson	1891	
W. 3 miles	H. D. Page & G. C. Swan	1897	

EAST BOUNDARY

N. 4 miles	A. P. Hanson	1891	
S. 2 miles	H. D. Page & G. C. Swan	1897	
E. bdy., sec. 24			H. D. Page & G. C. Swan 1897
N. 4 miles			H. D. Page & G. C. Swan 1901

WEST BOUNDARY

All	H. D. Page & G. C. Swan	1897	
-----	----------------------------	------	--

SUBDIVISION

Partial	A. P. Hanson	1891	
			H. D. Page & G. C. Swan 1897
Partial			H. D. Page & G. C. Swan 1901
Completion	H. D. Page & G. C. Swan	1897	

All lines of this survey were run by direct method where lines were accessible; lines inaccessible were run by triangulation method. Distances to topography on lines run by triangulation methods are approximately as scaled from U.S.G.S. topographic sheets. The details of such triangulation have been thoroughly checked and verified, and in order to simplify the records, the diagrams and reductions are omitted from these field notes.

The directions of the lines of this survey were determined by reference to true meridians established on line by altitude observations on the sun and hour angle observations on Polaris. The lines were carried forward by sustained angulation being supplemented by other

Township 25 South, Range 2 West

CHAINS

numerous observations on the sun and Polaris taken throughout the progress of the survey.

The geographic position of the southeast corner of sec. 13, is in Latitude $38^{\circ} 37' 34''$ N. and Longitude $111^{\circ} 57' 34''$ W., as determined from ties to U.S.G.S. triangulation station "Monroe 2" located in Latitude $38^{\circ} 37' 31.357''$ N. and Longitude $112^{\circ} 00' 53.773''$ W.

The magnetic declination was read at a number of stations throughout the survey of these sections and the average of the several readings was found to be $14^{\circ} 30'$ E.

Dependent Resurvey of a Portion
of the East Boundary,
T. 25 S., R. 2 W., Salt Lake Meridian, Utah

Reestablishment of the Survey Executed by Andrew P. Hanson, Deputy Surveyor, in 1891, and a Corrective Retracement by H. D. Page and G. C. Swan, Deputy Surveyors, in 1901

Beginning at the cor. of secs. 13, 18, 19 and 24, T. 24 S., Rs. 1 and 2 W., monumented with a basalt stone, $14 \times 10 \times 9$ ins., mkd. 3 notches on the N. and S. edge, and firmly set, protruding 6 ins. above ground.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins. in the ground to bedrock, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T25S
R2W R1W
S13|S18
S24|S19
1972

from which

An aspen, 6 ins. diam., bears N. $65\frac{1}{2}^{\circ}$ E., 15 lks. dist., mkd. T25S R1W S18 BT.

An aspen, 6 ins. diam., bears S. $49\frac{1}{2}^{\circ}$ E., $22\frac{1}{2}$ lks. dist., mkd. T25S R1W S19 BT.

An aspen, 6 ins. diam., bears S. $31\frac{1}{2}^{\circ}$ W., $15\frac{1}{2}$ lks. dist., mkd. T25S R2W S24 BT.

A pine, 8 ins. diam., bears N. $37\frac{1}{2}^{\circ}$ W., $21\frac{1}{2}$ lks. dist., mkd. T25S R2W S13 BT.

Bury the original cor. stone alongside the iron post.

N. $0^{\circ} 12'$ W., bet. secs. 13 and 18.

Over mountainous land, with thick aspen and scattered pine timber; desc. 543 ft. over a gradual N. slope.

Dependent Resurvey of a Portion
of the East Boundary
T. 25 S., R. 2 W., Salt Lake Meridian Utah

CHAINS

- 37.00 Edge of timber, bears E. and W.; enter clearing with grass and scattered sagebrush.
- 39.95 The $\frac{1}{4}$ sec. cor. of secs. 13 and 18, monumented with a basalt stone, 22x14x12 ins., firmly set in a mound of stone and dimly mkd. $\frac{1}{4}$ on the W. face.
- At the cor. point
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 16 ins. in the ground to bedrock, in a mound of stone, $4\frac{1}{2}$ ft. base to top, with brass cap mkd.
- T25S
R2W R1W
 $\frac{1}{4}$
S13|S18
1972
- Bury the original cor. stone alongside the iron post.
-
- N. $0^{\circ} 26'$ W., beginning new measurement.
- Desc. 105 ft. over gradual N. slope.
- 9.82 Pole fence, bears E. and W.
- 19.17 Pole fence, bears E. and W.
- 20.60 Dirt road, bears NW. and SE.
- 21.32 Spring branch, 2 lks. wide, 2 ins. deep, course NW.; asc. 81 ft. over gradual SW. slope.
- 32.60 Enter thick aspen and scattered pine timber, edge bears NW. and SE.
- 40.34 Point for the cor. of secs. 7, 12, 13 and 18, at proportionate distance; there is no remaining evidence of the original cor.
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 14 ins. in the ground to bedrock, in a mound of stone, $4\frac{1}{2}$ ft. base to top, with brass cap mkd.
- T25S
R2W R1W
S12|S7
S13|S18
1972
- There are no suitable bearing trees within limits.
-
- N. $0^{\circ} 26'$ W., bet. secs. 7 and 12.
- Over mountainous land, with young aspen and scattered pine timber; asc. 20 ft. over SW. slope.
- 3.20 Top of ridge, bears NW. and SE.; desc. 260 ft. over NE. slope.
- 22.00 Leave timber, edge bears E. and W.; enter clearing with

Dependent Resurvey of a Portion
of the East Boundary
T. 25 S. R. 2 W. Salt Lake Meridian Utah

CHAINS

grass and scattered sagebrush.

- 25.30 Bottom of descent, bears E. and W.; over nearly level land.
- 29.00 Dirt road, bears E. and W.
- 31.00 Dry creek bed, 8 ins. deep, 3 lks. wide, drains N. 80° E.
- 40.34 The $\frac{1}{4}$ sec. cor. of secs. 7 and 12, monumented with a basalt stone, 18x14x10 ins., mkd. $\frac{1}{4}$ on top side, loosely set on the E. side of a small mound of stone.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T25S
R2W R1W
 $\frac{1}{4}$
S12|S7
1972

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor. and bury the original corner stone alongside the iron post.

N. 0° 29' W., beginning new measurement.

Over grassy meadows.

- 8.70 Enter pine timber, edge bears NE. and SW.
- 11.70 Leave timber, edge bears NW. and SE.
- 13.15 S. edge of Big Lake, bears NW. and SE.
- 24.70 N. edge of lake, bears NW. and SE.
- 25.65 Dirt road, bears NW. and SE.; asc. 130 ft. over gradual S. slope.
- 40.34 The cor. of secs. 1, 6, 7 and 12, monumented with a basalt stone, 24x15x12 ins., mkd. 5 notches on the S. and 1 notch on the N. edge, protruding 10 ins. above ground and a scattered mound of stone to the W.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 15 ins. in the ground to bedrock, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T25S
R2W R1W
S1 | S6
S12|S7
1972

Bury the original cor. stone alongside the iron post.

N. 2° 00' W., bet. secs. 1 and 6.

Dependent Resurvey of a Portion
of the East Boundary,
T. 25 S., R. 2 W., Salt Lake Meridian, Utah

CHAINS

- Over mountainous land, with thick aspen and scattered pine timber; asc. 92 ft. over S. slope.
- 0.50 Enter thick aspen timber, edge bears W. and SE.
- 7.00 Top of ridge, bears NW. and SE.; desc. 525 ft. over steep NE. slope; enter pine timber.
- 40.35 The $\frac{1}{4}$ sec. cor. of secs. 1 and 6, monumented with a basal stone, 20x17x12 ins., mkd. $\frac{1}{4}$ on the W. face and firmly set protruding 6 ins. above the ground.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 14 ins. in the ground to bedrock, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T25S
R2W R1W
 $\frac{1}{4}$
S1|S6
1972

from which

A pine, 10 ins. diam., bears N. $66\frac{1}{2}^\circ$ E., $17\frac{1}{2}$ lks. dist., mkd. T25S R1W $\frac{1}{4}$ S6 BT.

An aspen, 10 ins. diam., bears N. $51\frac{1}{2}^\circ$ W., $8\frac{1}{2}$ lks. dist., mkd. T25S R2W $\frac{1}{4}$ S1 BT.

Bury the original cor. stone alongside the iron post.

N. $2^\circ 55'$ W., beginning new measurement.

Desc. 115 ft. over N. slope.

- 16.75 Bottom of draw, drains E.; asc. 15 ft. over S. slope.
- 19.60 Top of ascent, slopes E.; desc. 140 ft. over gradual NE. slope.
- 40.60 The cor. of Tps. 25 S., Rs. 1 and 2 W., marked by an iron post, $2\frac{1}{2}$ ins. diam., firmly set, extending 8 ins. above the ground, with brass cap mkd. as described in the official record of the 1970 resurvey of the N. bdy. of T. 25 S., R. 1 W., as follows.

T24S R2W
S36

S1|S6
|
R2W R1W
T25S
1970

From this cor. the closing cor. of Tps. 24 S., Rs. 1 and 2 W., on the N. bdy. of sec. 6, T. 25 S., R. 1 W., bears N. $88^\circ 06'$ E., 10.60 chs. dist., monumented with an iron post, $2\frac{1}{2}$ ins. diam., in a mound of stone, with brass cap mkd. as described in the official record of the 1970 resurvey of the E. bdy. of T. 24 S., R. 2 W.

Dependent Resurvey of a Portion of the North Boundary,
T. 25 S., R. 2 W., Salt Lake Meridian, Utah

Dependent Resurvey of a Portion of the North Boundary,

T. 25 S., R. 2 W., Sec. 1, T. 25 S., R. 2 W.

CHAINS

Reestablishment of the Survey Executed by
Andrew P. Hanson, in 1891, and the Resurvey
by H. D. Page and G. C. Swan, Deputy Surveyors
in 1897

N. 89° 17' W., along the N. bdy. of sec. 1, T. 25 S.,
R. 2 W.

Over mountainous land, with thick pine and aspen timber;
asc. 108 ft. over NE. slope.

11.10 Top of spur, slopes N.; desc. 53 ft. over W. slope.

20.85 Bottom of descent, drains N.; asc. 104 ft. over NE. slope;
enter scattered timber, edge bears N. and S.

25.20 Enter thick aspen timber, edge bears N. and S.

29.28 Point for the $\frac{1}{4}$ sec. cor. of sec. 36, T. 24 S., R. 2 W.,
at proportionate distance; there is no remaining evidence
of the original cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 12 ins. in
the ground to bedrock, in a mound of stone, $4\frac{1}{2}$ ft. base
to top, with brass cap mkd.

T24S R2W
 $\frac{1}{4}$ S36
1972

from which

A pine, 10 ins. diam., bears N. 45° W., $7\frac{1}{2}$ lks.
dist., mkd. T24S R2W $\frac{1}{4}$ S36 BT.

Asc. 12 ft. over NE. slope.

33.30 Top of spur, slopes N.; desc. 5 ft. along N. slope.

38.56 Point for the $\frac{1}{4}$ sec. cor. of sec. 1, T. 25 S., R. 2 W.,
at proportionate distance; there is no remaining evidence
of the original cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in
the ground, in a collar of stone, with brass cap mkd.

$\frac{1}{4}$ S1
T25S R2W
1972

from which

A pine, 10 ins. diam., bears S. 65° E., 7 lks.
dist., mkd. T25S R2W $\frac{1}{4}$ S1 BT.

Continue along N. slope.

40.00 Base of ascent, bears N. and S.; asc. 30 ft. over E.
slope.

42.90 E. rim of Water Canyon, bears N. and S.; desc. 520 ft.
over steep W. slope.

53.00 Bottom of canyon, drains N.; asc. 520 ft. over steep E.

Dependent Resurvey of a Portion of the North Boundary,
T. 25 S. R. 2 W. Salt Lake Meridian Utah

CHAINS

slope.

- 65.00 W. rim of canyon, bears N. and S., desc. 20 ft. over W. slope, through thick pine timber.
- 68.00 Bottom of ravine, drains N. 10° E.; asc. 5 ft. over E. slope; leave timber.
- 69.16 Point for the cor. of secs. 35 and 36, T. 24 S., R. 2 W., at proportionate distance; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to bedrock, in a mound of stone, 4½ ft. base to top, with brass cap mkd.

T24S R2W
S35|S36
S1
T25S
1972

Asc. 100 ft. over rocky E. slope.

- 73.30 Enter aspen timber, edge bears N. and S.; slope changes; asc. 30 ft. over NE. slope.
- 77.12 Point for the cor. of secs. 1 and 2, T. 25 S., R. 2 W., at proportionate distance; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground, in a collar of stone, with brass cap mkd.

T24S
S35
S2|S1
T25S R2W
1972

There are no suitable bearing trees within limits.

N. 89° 17' W., along the N. bdy. of sec. 2, T. 25 S., R. 2 W.

Over mountainous land, with aspen and pine timber; asc. 50 ft. over gradual NE. slope.

- 19.30 Slope changes; thence along N. slope; leave timber, edge bears N. and S.
- 29.00 Slope changes; asc. 20 ft. over gentle NE. slope.
- 31.92 Point for the ¼ sec. cor. of sec. 35, T. 24 S., R. 2 W., at proportionate distance; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 16 ins. in the ground, to bedrock, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T24S R2W
¼ S35
1972

Dependent Resurvey of a Portion of the North Boundary,
T. 25 S., R. 2 W., S. 2 E., T. 10 N., R. 1 E.

CHAINS

Cor. is set 4 lks. north of edge of trail road, which bears E. and W.

Over nearly level land with grass and scattered sagebrush.

38.56 The $\frac{1}{4}$ sec. cor. of sec. 2, T. 25 S., R. 2 W., monumented with a basalt stone, 18x10x6 ins., (Record, 20x12x6 ins.), firmly set, protruding 8 ins. above ground, and dimly mkd. $\frac{1}{2}$ on the S. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 14 ins. in the ground to bedrock, in a mound of stone, 4 ft. base to top, with brass cap mkd.

$\frac{1}{4}$ S2
T25S R2W
1972

Bury the original cor. stone alongside the iron post.

N. $89^{\circ} 54'$ W., beginning new measurement.

Asc. 30 ft. over gentle E. slope.

20.00 Trail road, bears N. 75° W. and S. 75° E.

23.40 Enter aspen timber, edge bears NW. and SE.; slope changes; asc. 45 ft. over NE. slope.

29.70 Trail road, bears NE. and SW.

33.24 The cor. of secs. 34 and 35, T. 24 S., R. 2 W., monumented with a basalt stone, 20x16x12 ins., firmly set, protruding 8 ins. above ground, mkd. 4 notches on the W., 2 notches on the E. and 6 notches on the N. edge.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 16 ins. in the ground to bedrock, in a mound of stone, $3\frac{1}{2}$ ft. base to top, with brass mkd.

T24S R2W
S34|S35
S2
T25S
1972

Bury the original cor. stone alongside the iron post.

Asc. 40 ft. over NE. slope, with continuous measurement.

39.20 The cor. of secs. 2 and 3, T. 25 S., R. 2 W., monumented with a basalt stone, 14x10x8 ins., firmly set, protruding 6 ins. above the ground, mkd. 2 notches on the E. and 4 notches on the W. edge, and a scattered mound of stone, to the S.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 8 ins. in the ground to bedrock, in a mound of stone, $4\frac{1}{2}$ ft. base to top, with brass cap mkd.

Dependent Resurvey of a Portion of the North Boundary,
T. 25 S., R. 2 W., California

CHAINS

T24S
S34

S3|S2
T25S R2W
1972

from which

A fir, 14 ins. diam., bears S. $21\frac{1}{2}^{\circ}$ E., 38 lks.
dist., mkd. T25S R2W S2 BT.

A fir, 12 ins. diam., bears S. $60\frac{1}{2}^{\circ}$ W., 37 lks.
dist., mkd. T25S R2W S3 BT.

Bury the original cor. stone alongside the iron post.

Reestablishment of the Survey Executed by H. D. Page and
G. C. Swan, Deputy Surveyors, in 1897

S. $89^{\circ} 33'$ W., along the N. bdy. of sec. 3, T. 25 S.,
R. 2 W.

Over broken mountainous land, with thick aspen and pine
timber; asc. 20 ft. over NE. slope.

- 4.00 Top of spur, slopes N.; desc. 200 ft. over steep NW.
slope.
- 8.00 Bottom of draw, drains N. 10° W.; asc. 460 ft. over
steep NE. slope.
- 26.30 Top of high spur, slopes N.; desc. 125 ft. over steep
W. slope.
- 29.35 Point selected for the witness $\frac{1}{4}$ sec. cor. of sec. 34,
T. 24 S., R. 2 W.
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 4 ins.
in the ground to bedrock, in a mound of stone, $4\frac{1}{2}$ ft.
base to top, with brass cap mkd.

T24S R2W
W ← $\frac{1}{4}$ S34
C
1972

Desc. 150 ft. over steep W. slope.

- 34.03 True point for the $\frac{1}{4}$ sec. cor. of sec. 34, at proportion-
ate distance, falls on a steep ledgy slope and is unsafe
to monument. There is no remaining evidence of the
original cor.
- Desc. 500 ft. over steep NW. slope; by triangulation.
- 43.30 Bottom of canyon, drains N. 20° W.; asc. 350 ft. over
NE. slope.
- 50.30 Top of spur. slopes N.; desc. 150 ft. over NW. slope.
- 56.30 Bottom of draw, drains N.; asc. 50 ft. over E. slope.
- 59.30 Top of spur, slopes N.; desc. 150 ft. over NW. slope.

Dependent Resurvey of a Portion of the North Boundary
T. 25 S., R. 2 W., Salt Lake Meridian, Utah

- 64.30 Bottom of draw, drains N.; asc. 150 ft. over NE. slope.
- 68.55 The closing cor. of secs. 3 and 4, T. 25 S., R. 2 W., hereinafter described; end triangulation.
- 74.02 The cor. of secs. 33 and 34, Tp. 24 S., R. 2 W., monumented with a basalt stone, 18x9x9 ins., firmly set, extending 8 ins. above the ground, mkd. 3 notches on the E. and W. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to bedrock, in a mound of stone, 4½ ft. base to top, with brass cap mkd.

T24S R2W
S33|S34
S4
T25S
1972

Bury the original cor. stone alongside the iron post.

Dependent Resurvey of a Portion of the Subdivision,
T. 25 S., R. 2 W., Salt Lake Meridian, Utah

Reestablishment of the Survey Executed by A. P. Hanson, Deputy Surveyor, in 1891, and Resurveys by H. D. Page and G. C. Swan, Deputy Surveyors, in 1897 and 1901

From the cor. of secs. 13, 18, 19 and 24, on the E. bdy. of the Tp.

S. 89° 35' W., along the S. bdy. of sec. 13.

Over mountainous land, with thick aspen and scattered pine timber; along N. slope.

- 2.00 Slope changes; desc. 80 ft. over NW. slope.
- 11.00 Bottom of draw, drains N.; asc. 80 ft. over NE. slope.
- 19.00 Top of spur, slopes N. 30° E.; desc. 20 ft. along N. slope.
- 24.50 Bottom of descent, slopes N.; asc. 70 ft. over NE. slope.
- 32.50 Top of spur, slopes N.; desc. 130 ft. over W. slope.
- 49.42 Point for the ¼ sec. cor. of secs. 13 and 24, at proportionate distance; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 15 ins. in the ground to bedrock, in a mound of stone, 4½ ft. base to top, with brass cap mkd.

Dependent Resurvey of a Portion of the Subdivision,
T. 25 S., R. 2 W., Cal. Lake Modification, Pub.

CHAINS

T25S R2W
 $\frac{1}{4}$ $\frac{S13}{S24}$
 1972

Desc. 10 ft. over W. slope.

42.00 Dry spring branch, 4 lks. wide, course N. 30° E.; asc. 240 ft. over E. slope.

58.00 Top of ridge, bears N. and S.; also pole fence, bears N. 80° W. and S. 45° E.; desc. 140 ft. over W. slope.

68.70 Base of descent, slopes NW.; enter small clearing; thence along gentle N. slope.

72.20 Enter thick pine and aspen timber, edge bears NW. and SE.

80.81 Point selected for the witness cor. of secs. 13 and 14.

Set an iron post, 30 ins. long, 2½ ins. diam., 4 ins. in the ground to bedrock, in a mound of stone, 4½ ft. base to top, with brass cap mkd.

T25S R2W
 W $\frac{S14|S13}{S23}$
 C ←
 1972

80.84 The cor. of secs. 13 and 14, monumented with a boulder 7x7x6 ft., mkd. with a cross (X) for true point, with 3 notches to the S. and 1 notch to the E., and a small mound of stone N. of the cross. This position of the cross on the boulder prevents monumenting an iron post at this point.

from which

A pine, 14 ins. diam., bears N. 83° E., 37 lks. dist., mkd. T25S R2W S13 BT.

A pine, 7 ins. diam., bears N. 52° W., 29 lks. dist., mkd. T25S R2W S14 BT.

Reestablishment of the Survey Executed by
 A. P. Hanson, Deputy Surveyor, in 1891

N. 0° 43' W., bet. secs. 13 and 14.

Over mountainous land, with thick aspen and pine timber; desc. 120 ft. over N. slope.

6.00 Slope changes; desc. 40 ft. over NE. slope.

14.00 Bottom of draw, drains NW.; desc. 150 ft. over gradual NW. slope.

27.00 Dirt road, bears NE. and SW

39.54 The ¼ sec. cor. of secs. 13 and 14, monumented with a

Dependent Resurvey of a Portion of the Subdivision,
T. 25 S., R. 2 W., Salt

CHAINS

basalt stone, 20x18x12 ins., firmly set, extending 10 ins above the ground and mkd. $\frac{1}{4}$ on the W. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground, in a collar of stone, with brass cap mkd.

T25S R2W
 $\frac{1}{4}$
S14|S13
1972

from which

A fir, 16 ins. diam., bears S. 12° E., 51 lks. dist., mkd. T25S R2W $\frac{1}{4}$ S13 BT.

A fir, 15 ins., diam., bears N. 58° W., 8 lks. dist., mkd. T25S R2W $\frac{1}{4}$ S14 BT.

Bury the original cor. stone alongside the iron post.

N. 1° 18' E., beginning new measurement.

Slope changes; desc. 80 ft. over gradual N. slope.

- 2.00 Bottom of White Pine Creek, 10 lks. wide, 2 ins. deep, course irregularly N.; enter grassy meadow.
- 31.50 Leave creek bottom, creek flows N. 30° W.; thence along gentle W. slope; enter thick aspen and pine timber, edge bears E. and W.
- 40.46 Point for the witness cor. of secs. 11, 12, 13 and 14.
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins. in the ground, in a collar of stone, with brass cap mkd.

T25S R2W
W C
S11↑S12
S14|S13
1972

- 40.55 The cor. of secs. 11, 12, 13 and 14, monumented with a basalt boulder, 6x5x4 ft., mkd. with a cross (X) for true point, 4 notches to the S. and 1 notch to the E. The position of the cross on the boulder prevents monumenting an iron post on true point.

from which

A fir, 8 ins. diam., bears S. 78° E., 73 lks. dist., mkd. T25S R2W S13 BT.

A fir, 7 ins. diam., bears S. 51° W., 64 lks. dist., mkd. T25S R2W S14 BT.

From the cor. of secs. 7, 12, 13 and 18, on the E. bdy. of the Tp.

Dependent Resurvey of a Portion of the Subdivision,
T. 25 S. R. 2 W. Salt Lake Meridian, Utah

CHAINS

S. 89° 47' W., bet. secs. 12 and 13.

Over mountainous land, with thick aspen and scattered pine timber; desc. 160 ft. over SW. slope.

- 6.10 Enter grassy clearing, edge bears NW. and SE.
- 9.90 Small stream of water in bottom of draw, course N. 30° W.; asc. 340 ft. over NE. slope.
- 11.90 Dirt road, bears N. 30° W. and S. 30° E.
- 13.50 Enter thick aspen and pine timber, edge bears N. and S.
- 30.50 Dirt road, bears N. 56° W. and S. 56° E.
- 39.46 The $\frac{1}{4}$ sec. cor. of secs. 12 and 13, monumented with a basalt stone, 18x12x10 ins., firmly set, extending 10 ins. above ground and mkd. $\frac{1}{4}$ on the N. face.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 18 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.

$$\begin{array}{r} \text{T25S R2W} \\ \frac{1}{4} \frac{\text{S12}}{\text{S13}} \\ 1972 \end{array}$$

from which

An aspen, 6 ins. diam., bears N. 17° E., 29 lks. dist., mkd. T25S R2W $\frac{1}{4}$ S12 BT.

An aspen, 7 ins. diam., bears S. 2° E., 20 $\frac{1}{2}$ lks. dist., mkd. T25S R2W $\frac{1}{4}$ S13 BT.

Bury the original cor. stone alongside the iron post.

S. 88° 41' W., beginning new measurement.

Asc. 10 ft. over NE. slope.

- 2.00 Top of ascent, slopes N.; desc. 20 ft. over NW. slope.
- 8.00 Bottom of descent, slopes N.; asc. 100 ft. over NE. slope.
- 18.00 Top of spur, slopes N.20° E.; thence along N. slope.
- 20.31 Point for the W. 1/16 sec. cor. of secs. 12 and 13.

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 6 ins. in the ground, in a mound of stone, 4 $\frac{1}{2}$ ft. base to top, with brass cap mkd.

$$\begin{array}{r} \text{T25S R2W} \\ \text{W } 1/16 \frac{\text{S12}}{\text{S13}} \\ 1972 \end{array}$$

from which

Dependent Resurvey of a Portion of the Subdivision,
T. 25 S. R. 2 W. Salt Lake Meridian Utah

CHAINS

A spruce, 14 ins. diam., bears N. 25° E., 42 lks. dist., mkd. T25S R2W W1/16 S12 BT.

A fir, 16 ins. diam. bears S. 66° E., 38 lks. dist., mkd. T25S R2W W1/16 S13 BT.

- 31.60 Top of spur, slopes N. 30° W.; desc. 200 ft. over W. slope.
- 36.70 Dirt road, bears N. and S.
- 40.62 True point for the cor. of secs. 11, 12, 13 and 14.

N. 3° 28' W., bet. secs. 11 and 12.

Over mountainous land, with thick aspen and pine timber; desc. 160 ft. over NW. slope.

- 17.00 Enter grassy meadow, edge bears E. and W.; over nearly level land.
- 24.50 White Pine Creek, 5 lks. wide, 3 ins. deep, course N. 75° E.
- 27.50 Trail road, bears E. and W.; enter thick aspen timber, edge bears E. and W.; asc. 60 ft. over SE. slope.
- 38.10 Enter small grassy clearing, edge bears E. and W.
- 39.36 Point for the $\frac{1}{4}$ sec. cor. of secs. 11 and 12, at proportionate distance; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 16 ins. in the ground, in a mound of stone, 4½ ft. base to top, with brass cap mkd.

T25S R2W

$\frac{1}{4}$
S11|S12
1972

There are no suitable bearing trees within limits.

Asc. 100 ft. over SE. slope.

- 42.00 Enter scattered aspen timber, edge, bears SE. and SW.
- 50.20 Top of spur, slopes E.; desc. 60 ft. over NE. slope.
- 60.00 Enter grassy clearing, edge bears E. and W.
- 61.60 Trail road, bears E. and W.
- 62.00 Small wash in bottom of ravine, drains N. 80° E.; asc. 140 ft. over SE. slope.
- 68.70 Enter aspen and pine timber, edge bears E. and W.
- 75.40 Top of spur, slopes S. 60° E.; desc. 50 ft. over NE. slope.

Dependent Resurvey of a Portion of the Subdivision,
T.25 S.. R. 2 W.. Salt Lake Meridian Utah

CHAINS

78.72 The cor. of secs. 1, 2, 11 and 12, monumented with a basalt stone, 30x12x10 ins., firmly set, extending 12 ins. above the ground, mkd. 1 notch on the E. and 5 notches on the S. edge, and a scattered mound of stone to the NE.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground, in a mound of stone, 4½ ft. base to top, with brass cap mkd.

T25S R2W	
S2	S1
S11	S12
1972	

from which

A fir, 9 ins. diam., bears N. 70° E., 16½ lks. dist., mkd. T25S R2W S1 BT.

A fir, 8 ins. diam., bears S. 55° W., 17½ lks. dist., mkd. T25S R2W S11 BT.

A fir, 10 ins. diam., bears N. 27½° W., 11 lks. dist., mkd. T25S R2W S2 BT.

Bury the original cor. stone alongside the iron post.

From the cor. of secs. 1, 6, 7 and 12, on the E. bdy. of the Tp.

S. 86° 32' W., bet. secs. 1 and 12.

Over mountainous land, with scattered aspen timber; desc. 120 ft. over grassy SW. slope.

- 17.50 Trail road, bears NW. and SE.; over nearly level land.
- 19.00 E. edge of Big Lake bears NW. and SE.
- 27.50 W. edge of lake, bears NW. and SE.; asc. 20 ft. over NE. slope.
- 35.00 Top of ascent, bears NW. and SE.; desc. 20 ft. over SW. slope.
- 40.00 Bottom of draw, drains N.; asc. 50 ft. over E. slope.
- 41.05 Fence, bears N. and S.
- 43.50 Top of low ridge, bears NW. and SE.
- 44.05 The ¼ sec. cor. of secs. 1 and 12, monumented with a basalt stone, 16x12x10 ins., firmly set, extending 10 ins. above the ground, mkd. ¼ on the N. face.
- At the cor. point
- Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground, in a mound of stone, 4½ ft. base to top, with brass cap mkd.

Dependent Resurvey of a Portion of the Subdivision,
T 2 S R 2 S

CHAINS

T25S R2W
 $\frac{1}{4}$ $\frac{S1}{S12}$
1972

from which

A fir, 9 ins. diam., bears N. $38\frac{1}{2}^\circ$ E., 95 lks. dist., mkd. T25S R2W $\frac{1}{4}$ S1 BT.

An aspen, 6 ins. diam., bears S. 45° W., $77\frac{1}{2}$ lks. dist., mkd. T25S R2W $\frac{1}{4}$ S12 BT.

Bury the original cor. stone alongside the iron post.

S. $89^\circ 28'$ W., beginning new measurement.

Desc. 20 ft. over W. slope.

- 3.50 Bottom of draw, drains N. 30° W.; asc. 20 ft. over E. slope.
- 9.50 Top of spur, slopes N.; desc. 50 ft. over W. slope.
- 11.50 Bottom of draw, drains N.; asc. 400 ft. over NE. slope; enter thick pine timber, edge bears NW. and SE.
- 40.06 The cor. of secs. 1, 2, 11 and 12.

N. $2^\circ 17'$ E., bet. secs. 1 and 2.

Over mountainous land, with thick pine and aspen timber; desc. 320 ft. over NE. slope.

- 19.00 Bottom of Henries Hollow, drains E.; asc. 320 ft. over steep S. slope.
- 28.60 Top of ridge, bears E. and W.; desc. 160 ft. over gradual N. slope.
- 42.54 Point for the $\frac{1}{4}$ sec. cor. of secs. 1 and 2, at proportionate distance there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins. in the ground, in a mound of stone, $4\frac{1}{2}$ ft. base to top, with brass cap mkd.

T25S R2W
 $\frac{1}{4}$
S2|S1
1972

from which

A fir, 8 ins. diam., bears S. 40° E., 5 lks. dist., mkd. T25S R2W $\frac{1}{4}$ S1 BT.

A fir, 10 ins. diam., bears N. 65° W., 7 lks. dist., mkd. T25S R2W $\frac{1}{4}$ S2 BT.

Desc. 240 ft. over gradual N. slope.

Dependent Resurvey of a Portion of the Subdivision,
T. 2 S., R. 2 W., Salt Lake Meridian, Utah

CHAINS

- 62.50 Slope changes; desc. 170 ft. over NE. slope.
84.90 The cor. of secs. 1 and 2, T. 25 S., R. 2 W., herein-
before described.

Reestablishment of the Survey Executed by A. P. Hanson,
Deputy Surveyor, in 1891, and Resurveyed by H. D. Page
and G. C. Swan, Deputy Surveyors, in 1897 and 1901.

From the cor. of secs. 13 and 14.

N. 81° 50' W., bet. secs. 14 and 23.

Over mountainous land, with thick aspen and pine timber;
asc. 20 ft. along N. slope.

- 6.00 Top of spur, slopes N.; desc. 120 ft. over NW. slope.
18.75 Forks of creek, drains N. and N. 45° E.; asc. 120 ft.
over E. slope.
22.00 Dirt road, bears N. 45° E. and S. 45° W.
28.00 Top of spur, slopes NE.; desc. 50 ft. over NW. slope.
39.88 Point for the $\frac{1}{4}$ sec. cor. of secs. 14 and 23, at pro-
portionate distance; there is no remaining evidence of
the original cor.
Set an iron post, 30 ins. long, 2½ ins. diam., 16 ins.
in the ground, in a mound of stone, 4 ft. base to top,
with brass cap mkd.

T25S R2W
 $\frac{1}{4} \frac{S14}{S23}$
1972

- 40.20 Bottom of draw, drains NE.; asc. 400 ft. over E. slope.
65.50 Saddle in ridge, bears NE. and SW.; desc. 30 ft. over
NW. slope.
70.00 Bottom of descent, slopes N.; asc. 40 ft. over NE. slope.
79.76 The cor. of secs. 14 and 23, monumented with a basalt
stone, 16x12x10 ins., firmly set, extending 8 ins. above
the ground, mkd. 2 notches on the E. and 3 notches on
the S. edge.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins.
in the ground, in a mound of stone, 4½ ft. base to top,
with brass cap mkd.

T25S R2W
S15 | $\frac{S14}{S23}$
1972

Bury the original cor. stone alongside the iron post.

Dependent Resurvey of a Portion of the Subdivision,
Townshi 25 S. R. 2 W Sal

- S. 3° 12' E., along the W. bdy. of sec. 23.
- Over mountainous land, with thick aspen and pine timber;
asc. 40 ft. over NE. slope.
- 3.10 The closing cor. of secs. 15 and 22, hereinafter described.
Asc. 110 ft. over NE. slope.
Top of spur, slopes NE.; desc. 275 ft. over SE. slope.
- 34.00 Bottom of draw, drains NE.; asc. 60 ft. over gradual NE.
slope.
- 41.29 The $\frac{1}{4}$ sec. cor. of sec. 23, monumented with a basalt
stone, 15x9x5 ins., firmly set, extending 8 ins. above the
ground, mkd. $\frac{1}{4}$ on the E. face, and a scattered mound of
stone to the E.
- At the cor. point
- Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 18 ins.
in the ground, in a collar of stone, with brass cap mkd.
- T25S R2W
|
 $\frac{1}{4}$
|S23
1972
- Bury the original cor. stone alongside the iron post.
-
- From the cor. of secs. 14 and 23.
- N. 2° 30' W., bet. secs. 14 and 15.
- Over mountainous land, with thick aspen and pine timber;
desc. 110 ft. over NE. slope.
- 6.00 Slope changes; desc. 260 ft. over steep N. slope.
- 22.00 Bottom of draw, drains N.; asc. 120 ft. over SE. slope.
- 41.27 Point for the $\frac{1}{4}$ sec. cor. of secs. 14 and 15, at propor-
tionate distance; there is no remaining evidence of the
original cor.
- Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 6 ins.
in the ground, in a mound of stone, 4 $\frac{1}{2}$ ft. base to top,
with brass cap mkd.
- T25S R2W
 $\frac{1}{4}$
S15|S14
1972
- Asc. 50 ft. over rocky SE. slope.
- 47.00 Top of spur, slopes NE.; desc. 360 ft. over N. slope.
- 63.00 Base of main descent, bears E. and W.; desc. 80 ft. over
gradual N. slope.
- 82.54 The cor. of secs. 10, 11, 14 and 15, monumented with a
basalt stone, 15x10x5 ins., firmly set, extending 6 ins.

Dependent Resurvey of a Portion of the Subdivision,
T. 25 S., R. 2 W., Salt Lake Meridian, Utah

CHAINS

above the ground, mkd. 2 notches on the E. and 4 notches on the S. edge, from which the remaining original bearing tree:

An aspen stump, 5 ft. high, 10 ins diam., bears S. 64° W., 17 lks. dist., dimly scribed W. and S.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 16 ins. in the ground, in a mound of stone, 4 ft. base to top with brass cap mkd.

T25S R2W
S10|S11
S15|S14
1972

From which new bearing trees:

A fir, 12 ins. diam., bears N. 33° E., 20 lks. dist., mkd. T25S R2W S11 BT.

A fir, 14 ins. diam., bears S. 12° E., 23 lks. dist., mkd. T25S R2W S14 BT.

A fir, 14 ins. diam., bears S. 36° W., 19½ lks. dist., mkd. T25S R2W S15 BT.

A fir, 14 ins. diam., bears N. 84° W., 19 lks. dist., mkd. T25S R2W S10 BT.

Bury the original cor. stone alongside the iron post.

Reestablishment of the Survey Executed by
A. P. Hanson, Deputy Surveyor, in 1891

From the true point for the cor. of secs. 11, 12, 13 and 14.

N. 80° 42' W., bet. secs. 11 and 14.

Over mountainous land, with thick aspen and pine timber desc. 40 ft. over W. slope.

- 3.00 Bottom of White Pine Creek, course N.; asc. 20 ft. along gentle N. slope.
- 11.50 Slope changes; asc. 80 ft. over E. slope.
- 16.00 Top of spur, slopes N.; desc. 20 ft. over W. slope.
- 20.00 Bottom of draw, drains NE.; asc. 5 ft. over E. slope.
- 20.99 Point for the E. 1/16 sec. cor. of secs. 11 and 14.

Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground, in a mound of stone, 4½ ft. base to top, with brass cap mkd.

Dependent Resurvey of a Portion of the Subdivision,

CHAINS

$$\begin{array}{r} \text{T25S R2W} \\ \frac{\text{S11}}{\frac{1}{4} \text{S14}} \\ 1972 \end{array}$$

Asc. 160 ft. over NE. slope.

- 30.50 Top of high spur, slopes N.; desc. 140 ft. over NW. slope.
- 38.00 Small stream, 3 lks. wide, 3 ins. deep, in bottom of draw course N.; asc. 30 ft. over E. slope.
- 39.00 Trail road, bears N. and S.
- 41.98 Point for the $\frac{1}{4}$ sec. cor. of secs. 11 and 14, at proportionate distance; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 8 ins. in the ground, in a mound of stone, $4\frac{1}{2}$ ft. base to top, with brass cap mkd.

$$\begin{array}{r} \text{T25S R2W} \\ \frac{\text{S11}}{\frac{1}{4} \text{S14}} \\ 1972 \end{array}$$

Asc. 180 ft. over steep E. slope.

- 50.50 Top of ridge, bears N. and SE.; desc. 80 ft. over W. slope.
- 57.50 S. edge of Deep Lake, also grassy meadow, bears S.; asc. 0 ft. over gradual E. slope.
- 64.50 Top of low ridge, bears NW. and SE.; desc. 50 ft. over W. slope.
- 72.00 Creek, 2 ins. deep, 2 lks. wide, course N. 30° W.; asc. 50 ft. over NE. slope.
- 78.00 Spur, slopes N.; along gentle N. slope.
- 83.96 The cor. of secs. 10, 11, 14 and 15.

Reestablishment of the Surveys executed by A. P. Hanson, Deputy Surveyor, in 1891 and the resurveys by G. C. Swan and H. D. Page, Deputy Surveyors, in 1897 and 1901

N. $4^\circ 32'$ W., bet. secs. 10 and 11.

Over mountainous land, with thick aspen and pine timber; desc. 80 ft. over N. slope.

- 21.25 Leave timber, edge bears E. and W.
- 21.65 Trail road, bears E. and W.
- 22.00 S. edge of Annabella Reservoir, bears E. and W.
- 25.10 N. edge of reservoir, bears N. 75° W. and S. 75° E.; asc. 50 ft. over gradual S. slope.

Dependent Resurvey of a Portion of the Subdivision,
T. 25 S., R. 2 W., S. 10 & 11, Monticello, Utah

CHAINS

- 26.25 Enter thick aspen and pine timber, edge bears E. and W.
- 35.35 Top of ascent, bears E. and W.; desc. 50 ft. over gradual N. slope.
- 41.23 The $\frac{1}{4}$ sec. cor. of secs. 10 and 11, monumented with a basalt stone, 14x12x10 ins., firmly set, extending 5 ins. above the ground, mkd. $\frac{1}{4}$ on the W. face, and a scattered mound of stone to the W.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 18 ins. in the ground, in a collar of stone, with brass cap mkd.

T25S R2W

$\frac{1}{4}$

S10|S11

1972

from which

A fir, 25 ins. diam., bears S. 21° E., 44 lks. dist., mkd. T25S R2W $\frac{1}{4}$ S11 BT.

A fir, 20 ins. diam., bears S. 66 $\frac{1}{2}$ ° W., 46 lks. dist., mkd. T25S R2W $\frac{1}{4}$ S10 BT.

Bury the original cor. stone alongside the iron post.

N. 0° 38' E., beginning new measurement.

Desc. 20 ft. over N. slope, through scattered aspen and pine timber.

- 4.00 Bottom of swale, drains E.; asc. 25 ft. over SE. slope.
- 6.00 Top of ascent, bears E. and W.; desc. 30 ft. over gradual N. slope.
- 8.00 Bottom of swale, drains E.; asc. 25 ft. over gradual S. slope.
- 13.60 Top of low rise, bears E. and W.; desc. 40 ft. over gradual N. slope, through thick pine timber.
- 22.61 The cor. of secs. 2, 3, 10 and 11, monumented with a basalt stone, 19x14x9 ins., firmly set, extending 10 ins. above the ground, mkd. 5 notches on the S. and 2 notches on the E. edge, from which the original bearing trees:
- A pine, 9 ins. diam., bears N. 84° E., 8 lks. dist., mkd. S2 BT.
- A pine, 12 ins. diam., bears S. 36° E., 20 lks. dist., mkd. T25S R2W S11 BT.
- A pine, 10 ins. diam., bears S. 11° W., 20 lks. dist., mkd. with a healed blaze.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 15 ins.

Dependent Resurvey of a Portion of the Subdivision,
T. 25 S., R. 2 W. Salt Lake Meridian Utah

CHAINS

in the ground, in a mound of stone, $4\frac{1}{2}$ ft. base to top,
with brass cap mkd.

T25S R2W
S3 | S2
S10 | S11
1972

From which new bearing trees:

A fir, 15 ins. diam., bears N. $89\frac{1}{2}^\circ$ E., $58\frac{1}{2}$ lks.
dist., mkd. T25S R2W S2 BT.

A fir, 20 ins. diam., bears S. 36° E., $20\frac{1}{2}$ lks.
dist., mkd. T25S R2W S11 BT.

A fir, 18 ins. diam., bears S. $87\frac{1}{2}^\circ$ W., 18 lks.
dist., mkd. T25S R2W S10 BT.

A fir, 22 ins. diam., bears N. 30° W., $20\frac{1}{2}$ lks.
dist., mkd. T25S R2W S3 BT.

Bury the original cor. stone alongside the iron post.

Reestablishment of the Survey Executed by
A. P. Hanson, Deputy Surveyor, in 1891

From the cor. of secs. 1, 2, 11 and 12.

S. $88^\circ 10'$ W., bet. secs. 2 and 11.

Over mountainous land, with thick aspen and pine timber;
asc. 80 ft. over NE. slope.

- 9.00 Top of knoll; desc. 80 ft. over SW. slope.
- 31.00 Bottom of saddle in ridge, bears E and W.; asc. 60 ft.
over E. slope.
- 40.43 The $\frac{1}{4}$ sec. cor. of secs. 2 and 11, monumented with a
basalt stone, 14x12x8 ins., firmly set, extending 8 ins.
above the ground, mkd. $\frac{1}{4}$ on the N. face, and a scattered
mound of stone, to the N.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins.
in the ground, in a mound of stone, $4\frac{1}{2}$ ft. base to top,
with brass cap mkd.

T25S R2W
 $\frac{1}{4}$ S2
S11
1972

Bury the original cor. stone alongside the iron post.

S. $89^\circ 51'$ W., beginning new measurement.

Asc. 20 ft. over rocky E. slope.

Dependent Resurvey of a Portion of the Subdivision,
T. 25 S., R. 2 W., Salt Lake Meridian, Utah

CHAINS

- 5.50 Top of ascent, slopes S.; desc. 50 ft. over SW. slope.
24.80 Enter grassy clearing, edge bears N. and S.
31.20 Trail road, bears NW. and SE.
33.80 Bottom of swale, drains S.; asc. 60 ft. over gradual E. slope.
37.50 Enter thick pine and aspen timber, edge bears SE. and curves W.
40.82 The cor. of secs. 2, 3, 10 and 11.

Reestablishment of the Surveys Executed by A. P. Hanson, in 1891, and the Resurveys by H. D. Page and G. C. Swan, Deputy Surveyors, in 1897 and 1901

N. 3° 57' E., bet. secs. 2 and 3.

Over mountainous land, with thick aspen and pine timber; desc. 10 ft. over gradual NE. slope.

- 0.30 Enter grassy clearing, edge bears E. and W.
2.00 Bottom of descent, slopes E.; along gentle E. slope.
4.35 Trail road, bears E. and W.
5.40 Enter thick aspen and pine timber, edge bears E. and W.
7.60 Begin descent over NE. slope, 160 ft.
17.65 Trail road, bears N. 45° W. and S. 45° E.
21.50 Enter grassy clearing, edge bears E. and W.
21.90 Point for the S. 1/16 sec. cor. of secs. 2 and 3.

Set an iron post, 30 ins. long, 2½ ins. diam., 15 ins. in the ground, in a mound of stone, 4½ ft. base to top, with brass cap mkd.

T25S R2W
S 1/16
S3|S2
1972

from which

A fir, 8 ins. diam., bears S. 31½° E., 65 lks. dist., mkd. S 1/16 S2 BT.

A fir, 9 ins. diam., bears S. 28½° W., 48 lks. dist., mkd. S 1/16 S3 BT.

Desc. 40 ft. over NE. slope.

- 35.90 Bottom of swale, drains E.; asc. 100 ft. over gradual S. slope.

Dependent Resurvey of a Portion of the Subdivision,
T. 25 S., R. 2 W., Salt Lake Meridian, Utah

CHAINS

- 41.70 Trail road, bears E. and W.
43.00 Enter aspen timber, edge bears E. and W.
43.80 The $\frac{1}{4}$ sec. cor. of secs. 2 and 3, monumented with a basalt stone, 14x10x6 ins., firmly set, extending 6 ins. above the ground, mkd. $\frac{1}{4}$ on the W. face, and surrounded by a scattered mound of stone.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins. in the ground, in a mound of stone, $4\frac{1}{2}$ ft. base to top, with brass cap mkd

T25S R2W

$\frac{1}{4}$

S3|S2

1972

from which

An aspen, 7 ins. diam., bears N. 36° E., $17\frac{1}{2}$ lks. dist., mkd. T25S R2W $\frac{1}{4}$ S2 BT.

An aspen, 6 ins. diam., bears N. 17° W., 17 lks dist., mkd. T25S R2W $\frac{1}{4}$ S3 BT.

The NW. cor. of a cabin, bears S. 30° E., 5.70 chs. dist.

Bury the original cor. stone alongside the iron post.

N. $5^{\circ} 00'$ E., beginning new measurement.

Asc. 40 ft. over S. slope.

- 6.30 Top of ridge, bears E. and W.; desc. 440 ft. over gradual N. slope, through thick pine timber.
28.00 Trail road, bears N. 45° E. and S. 45° W.
43.21 The cor. of secs. 2 and 3, T. 25 S., R. 2 W., herein-before described.

Reestablishment of the Survey Executed by H. D. Page and G. C. Swan, Deputy Surveyors, in 1897

The cor. of secs. 15, 16, 21 and 22, monumented with a basalt stone, 24x12x8 ins., firmly set, extending 12 ins. above the ground, mkd. 3 notches on the S. and E. edge, and surrounded by a scattered mound of stone, from which the remaining original bearing tree:

A dead pine, 8 ins. diam., bears N. $7\frac{1}{2}^{\circ}$ W., 50 lks. dist., mkd. with scarred blaze.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 12 ins.

Dependent Resurvey of a Portion of the Subdivision,
T25 S. R. 2 W., Salt Lake Meridian Utah

CHAINS

in the ground, in a mound of stone, $4\frac{1}{2}$ ft. base to top,
with brass cap mkd.

T25S R2W
S16|S15
S21|S22
1972

from which new bearing trees:

A fir, 10 ins. diam., bears S. 6° W., $33\frac{1}{2}$ lks.
dist., mkd. T25S R2W S21 BT.

A fir, 9 ins. diam., bears N. $3\frac{1}{2}^\circ$ W., $23\frac{1}{2}$ lks.
dist., mkd. T25S R2W S16 BT.

Bury the original cor. stone alongside the iron post.

From this cor., U.S.C. & G.S. triangulation station
"Monroe 2", bears S. $45^\circ 20'$ W., 16.63 chs. dist., a
brass tablet seated in a basalt stone boulder.

East, bet. secs. 15 and 22.

Over mountainous land, with thick pine and aspen timber;
desc. 225 ft. over NE. slope.

- 10.00 Bottom of draw, drains N.; asc. 50 ft. over NW. slope.
- 15.00 Top of spur, slopes N.; desc. 30 ft. along N. slope.
- 26.00 Bottom of draw, drains NW.; asc. 250 ft. over NW. slope.
- 35.30 Top of spur, slopes N. 20° W.; thence along N. slope.
- 39.51 The $\frac{1}{4}$ sec. cor. of secs. 15 and 22, monumented with a
basalt stone, 24x15x12 ins., firmly set, protruding 10
ins. above the ground, mkd. $\frac{1}{4}$ on the N. face and a
scattered mound of stone to the W.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 15 ins. in
the ground, in a mound of stone, $4\frac{1}{2}$ ft. base to top,
with brass cap mkd.

T25S R2W
 $\frac{1}{4}$ S15
S22
1972

from which

A fir, 20 ins. diam., bears N. 10° E., $33\frac{1}{2}$ lks.
dist., mkd. T25S R2W $\frac{1}{4}$ S15 BT.

A fir, 16 ins. diam., bears S. 57° E., 50 lks.
dist., mkd. T25S R2W $\frac{1}{4}$ S22 BT.

Bury the original cor. stone alongside the iron post.

S. $89^\circ 49'$ E., beginning new measurement.

Desc. 20 ft. along N. slope.

Dependent Resurvey of a Portion of the Subdivision,

CHAINS

- 4.00 Bottom of draw, drains N. 30° W.; asc. 60 ft. over NW. slope.
- 9.00 Top of spur, slopes N.; desc. 300 ft. over NE. slope.
- 29.69 The closing cor. of secs. 15 and 22, on the W. bdy. of sec. 23, monumented with a basalt stone, 15x10x5 ins., firmly set, extending 6 ins. above the ground, mkd. 2 notches on the E., and 3 notches on the S., and a CC on the W. edge, from which the remaining original bearing tree:

A fir, 24 ins. diam., bears S. 70° W., 20½ lks. dist., mkd. CC BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 16 ins. in the ground, in a mound of stone, 4½ ft. base to top, with brass cap mkd.

T25S R2W

C S15|
C S23|
1972

Bury the original cor. stone alongside the iron post.

From this cor., the cor. of secs. 14 and 23, hereinbefore described, bears N. 3° 12' W., 3.10 chs. dist.

From the cor. of secs. 15, 16, 21 and 22.

N. 0° 11' E., bet. secs. 15 and 16.

Over mountainous land, with thick aspen and pine timber; desc. 450 ft. over NE. slope.

- 23.00 Slope changes; desc. 100 ft. over N. slope; enter grassy meadow with scattering pine.
- 29.00 Spring branch, 2 lks. wide, 1 in. deep, course N. 20° W.
- 39.90 The ¼ sec. cor. of sec. 16, monumented with a basalt stone, 18x12x6 ins., firmly set, protruding 6 ins. above the ground, mkd. ¼ on the W. face, and a scattered mound of stone to the W.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, in a collar of stone, with brass cap mkd.

T25S R2W
¼|
S16|
|
1972

ury the original cor. stone alongside the iron post.

. 0° 03' E., beginning new measurement.

Dependent Resurvey of a Portion of the Subdivision,
T. 25 S., R. 2 W. Salt Lake Meridian, Utah

CHAINS

- Desc. 20 ft. over N. slope.
- 5.40 Spring branch, 2 lks. wide, 1 in. deep, course N. 30° E.; desc. 50 ft. over NE. slope.
- 14.00 Slope changes; thence along E. slope; enter thick pine timber, edge bears NE. and SW.
- 32.00 Top of spur, slopes NE.; desc. 75 ft. over NE. slope.
- 40.09 The cor. of secs. 9 and 16, monumented with a basalt stone, 16x12x8 ins., firmly set, protruding 6 ins. above the ground, mkd. 4 notches on the S., 3 notches on the E. edge and in a scattered mound of stone, from which the remaining original bearing tree:
- The stump hole of a downed pine, 12 ins. diam., bears S., 15 lks. dist., the tree marked T25S R2W S16 BT on an open blaze.
- At the cor. point
- Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground, in a mound of stone, 4½ ft. base to top, with brass cap mkd.
- T25S R2W
 $\frac{S9}{S16}$ | S15
 1972
- from which new bearing trees:
- A fir, 10 ins. diam., bears N. 85° E., 15 lks. dist., mkd. T25S R2W S16 BT.
- An aspen, 6 ins. diam., bears N. 86° W., 18 lks. dist., mkd. T25S R2W S9 BT.
- Bury the original cor. stone alongside the iron post.
-
- N. 0° 04' W., along the E. bdy. of sec. 9.
- Over mountainous land, with thick pine and aspen timber; desc. 90 ft. over NE. slope.
- 5.30 The closing cor. of secs. 10 and 15, hereinafter described.
- Desc. 57 ft. over N. slope.
- 16.50 Enter grassy clearing, edge bears E. and W.; thence over nearly level land.
- 30.20 Narrow strip of aspen timber, 20 ft. wide, bears NE. and SW.; asc. 20 ft. over gentle S. slope.
- 36.20 Enter thick aspen and pine timber, edge bears E. and W.
- 39.47 The ¼ sec. cor. of sec. 9, monumented with a basalt stone, 18x10x9 ins., firmly set, protruding 9 ins. above the ground, mkd. ¼ on the E. face and surrounded by a scattered mound of stone, from which the original bearing trees:

Dependent Resurvey of a Portion of the Subdivision,
T. 25 S. R. 2 W. Salt Lake Meridian Utah

CHAINS

A fir, 30 ins. diam., bears S. $20\frac{1}{2}^{\circ}$ W., $11\frac{1}{2}$ lks. dist., with a pitched over blaze.

An aspen, 9 ins. diam., bears N. $22\frac{1}{2}^{\circ}$ W., $25\frac{1}{2}$ lks. dist., mkd. $\frac{1}{4}$ S BT.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins. in the ground, in a collar of stone, with brass cap mkd.

T25S R2W
 $\frac{1}{4}$ |
S9|
1972

from which a new bearing tree:

A fir, 12 ins. diam., bears N. 88° W., $41\frac{1}{2}$ lks. dist., mkd. T25S R2W $\frac{1}{4}$ S9 BT.

Bury the original cor. stone alongside the iron post.

N. $0^{\circ} 04'$ E., beginning new measurement.

Desc. 50 ft. over gradual N. slope.

- 4.10 Rim of canyon, bears N. 10° W. and E.; desc. 100 ft. along E. slope.
- 11.00 Slope changes; desc. 55 ft. over steep broken N. slope; by triangulation.
- 22.00 Cottonwood Creek, in canyon bottom, course N. 50° W.; asc. 250 ft. over steep S. slope.
- 28.58 True point for the closing cor. of secs. 3 and 10, at proportionate distance, falls on steep inaccessible slope of canyon and cannot be monumented. There is no remaining evidence of the original cor.
- Asc. 200 ft. over steep S. slope.
- 32.59 Point for the witness closing cor. of secs. 3 and 10.
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 8 ins. in the ground, in a mound of stone, 5 ft. base to top, with brass cap mkd.

WC
T25S R2W
|S3 C
|S10 C

1972

- 32.65 Top of spur, slopes S. 40° W.; asc. 150 ft. over SW. slope; end of triangulation.
- 35.80 Top of rocky spur, slopes W.; along rocky W. slope.
- 39.83 The cor. of secs. 4 and 9, monumented with a basalt stone, 26x12x8 ins., firmly set in rock slide, extending 12 ins.

Dependent Resurvey of a Portion of the Subdivision,
 T25S R2W S10

CHAINS

above the rock, mkd. 5 notches on the S. and 3 notches on the E. edge, from which the original bearing tree:

A fir, 14 ins. diam., bears S. 45° W., 35½ lks. dist., mkd. T25S R2W S9 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground, in a mound of stone 5 ft. base to top, with brass cap mkd.

T25S R2W
 $\frac{S4}{S9} \mid S3$
 1972

Bury the original cor. stone alongside the iron post.

From the cor. of secs. 10, 11, 14 and 15.

S. 89° 37' W., bet. secs. 10 and 15.

Over mountainous land, with thick pine and aspen timber; asc. 20 ft. over NE. slope.

- 3.80 Top of spur, slopes N.; desc. 20 ft. over gradual NW. slope.
- 12.40 Bottom of draw, drains N.; asc. 58 ft. over NE. slope.
- 28.10 Top of spur, slopes N.; desc. 25 ft. over gradual NW. slope.
- 34.70 Spring branch. 1 in. deep, 2 lks. wide, course N.
- 39.00 Enter grassy meadow, edge bears NE. and SW.; over nearly level land.
- 40.01 The ½ sec. cor. of secs. 10 and 15, monumented with a basalt stone, 14x12x10 ins., firmly set, extending 8 ins. above the ground, mkd. ½ S10 on N. face, from which the original bearing tree:
- A dead pine, 10 ins. diam., bears S. 14° W., 125 lks. dist., mkd. ½ BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground, in a collar of stone, with brass cap mkd.

T25S R2W
 $\frac{S10}{S15}$
 1972

from which a new bearing tree

A fir, 12 ins. diam., bears S. 18° W., 129½ lks. dist., mkd. T25S R2W ½ S15 BT.

Bury the original cor. stone alongside the iron post.

Dependent Resurvey of a Portion of the Subdivision,
T. 25 S., R. 2 W., Salt Lake Meridian, Utah

CHAINS

N. 89° 44' W., beginning new measurement.

Over nearly level land.

- 3.50 Enter thick aspen and pine timber, edge bears NW. and SE.
- 13.30 Spring branch, 1 in. deep, 2 lks. wide, course N. 10° E.; asc. 55 ft. over NE. slope.
- 25.33 The closing cor. of secs. 10 and 15, on the E. bdy. of sec. 9, monumented with a basalt stone, 15x10x8 ins., firmly set, extending 6 ins. above the ground, mkd. 4 grooves on the S. and 3 grooves and CC on the E. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 15 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap mkd.

T25S R2W
S9 | S10 C
 | S15 C

1972

Bury the original cor. stone alongside the iron post.

Point for the W. ¼ sec. cor. of sec. 15, at proportionate distance, and on the E. bdy. of sec. 16.

Set an iron post, 30 ins. long, 2½ ins. diam., 7 ins. in the ground, in a mound of stone, 4½ ft. base to top, with brass cap mkd.

T25S R2W
 | ¼
 | S15
1972

From this cor., the E. ¼ sec. cor. of sec. 16, hereinbefore described, bears S. 0° 03' W., 4.19 chs. dist.

From the cor. of secs. 2, 3, 10 and 11.

S. 87° 56' W., bet. secs. 3 and 10.

Over mountainous land, with thick aspen and pine timber; asc. 50 ft. over gradual NE. slope.

- 22.25 Enter grassy clearing, edge bears NW. and SE.; over nearly level land.
- 23.00 Trail road, bears N. and S.
- 24.50 E. edge of Duck Lake, bears NW. and S.
- 35.75 W. edge of lake, bears NE. and SW.
- 35.35 Trail road, bears NE. and SW.

Dependent Resurvey of a Portion of the Subdivision,
T. 25 S. R. 2 W. Salt Lake Meridian, Utah

CHAINS

40.76 The $\frac{1}{4}$ sec., cor. of secs. 3 and 10, monumented with a basalt stone, 20x14x10 ins., firmly set, protruding 10 ins. above the ground, mkd. $\frac{1}{4}$ on the N. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 12 ins. in the ground, in a mound of stone, $4\frac{1}{2}$ ft. base to top, with brass cap mkd.

T25S R2W
 $\frac{1}{4}$ $\frac{S3}{S10}$
1972

Bury the original cor. stone alongside the iron post.

N. $89^{\circ} 15'$ W., beginning new measurement.

Over nearly level land.

6.15 Enter aspen timber, edge bears NW. and SE.

14.40 Rim of canyon, bears NW. and SE.; desc. 450 ft. over steep SW. slope.

21.64 True point for the closing cor. of secs. 3 and 10, hereinbefore described.

Point for the W. $\frac{1}{4}$ sec. cor. of sec. 10, at midpoint bet. the closing cor. of secs. 10 and 15, and true point for the closing cor. of secs. 3 and 10, and on the E. bdy. of sec. 9.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T25S R2W
 $\frac{1}{4}$
|S10
1972

Raise a mound of stone, $2\frac{1}{2}$ ft. base, $1\frac{1}{2}$ ft. high, E. of cor.

From this cor., the $\frac{1}{4}$ sec. cor. of sec. 9, hereinbefore described, bears N. $0^{\circ} 04'$ W., 2.795 chs. dist.

From the cor. of secs. 4 and 9.

N. $0^{\circ} 32'$ E., along the E. bdy. of sec. 4.

Over rough and broken mountainous land, with scattered aspen and pine timber; along W. slope of rock slide.

4.00 Top of spur, slopes W.; desc. 500 ft. over broken NW. slope.

Dependent Resurvey of a Portion of the Subdivision,
T. 25 S., R. 2 W., Salt Lake Meridian, Utah

CHAINS

- 21.00 Bottom of canyon, drains W.; asc. 450 ft. over a steep S. slope.
- 28.40 Top of narrow spur, slopes W.; desc. 500 ft. over broken and steep NW. slope.
- 40.32 Point for the E. $\frac{1}{4}$ sec. cor. of sec. 4, at proportionate distance; there is no remaining evidence of the original cor.
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins. in the ground, in a mound of stone, $4\frac{1}{2}$ ft. base to top, with brass cap mkd.
- T25S R2W
S4|
1972
- Desc. 100 ft. over NW. slope.
- 47.00 Bottom of descent, slopes W.; asc. 350 ft. over SW. slope.
- 66.00 Top of high spur, slopes N. 75° W.; desc. 400 ft. over steep N. slope.
- 76.42 The closing cor. of secs. 3 and 4, T. 25 S., R. 2 W., on the S. bdy. of sec. 34, T. 24 S., R. 2 W., monumented with a basal stone, 16x10x9 ins., firmly set, protruding 3 ins. above the ground, mkd. 6 grooves and CC on S., 3 grooves on the E. and W. face.
- At the cor. point
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins. in the ground, in a mound of stone, $4\frac{1}{2}$ ft. base to top, with brass cap mkd.
- T24S R2W
S34

S4|S3
C|C
T25S R2W
1972
- Bury the original cor. stone alongside the iron post.
- From this cor., the cor. of secs. 33 and 34, T. 24 S., R. 2 W., hereinbefore described, bears S. $89^{\circ} 33'$ W., 5.47 chs. dist.

True point for the W. $\frac{1}{4}$ sec. cor. of sec. 3, at proportionate distance, and on the E. bdy. of sec. 4, falls on inaccessible slope of high spur and is unsafe to monument.

Point selected for the witness W. $\frac{1}{4}$ sec. cor. of sec. 3, bears S. $0^{\circ} 32'$ W., 63 lks. dist.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins. in the ground, in a mound of stone, $4\frac{1}{2}$ ft. base to top, with brass cap mkd.

Dependent Resurvey of a Portion of the Subdivision,
T. 25 S., R. 2 W. Salt Lake Meridian Utah

CHAINS

WC
T25S R2W
↑ $\frac{1}{4}$
|S3
1972

Cor. is set on top of narrow spur, sloping W.

From the true point, the E. $\frac{1}{4}$ sec. cor. of sec. 4, hereinbefore described, bears N. $0^{\circ} 32'$ E., 11.32 chs. dist.

True point for the N. $\frac{1}{4}$ sec. cor. of sec. 3, at proportionate distance longitudinally between the cor. of secs. 2 and 3 and the closing cor. of secs. 3 and 4, T. 25 S., R. 2 W., and on the S. bdy. of sec. 34, T. 24 S., R. 2 W., falls on the face of an E-W sandstone ledge, 5 ft. high and is unsafe to monument.

Point selected for the witness N. $\frac{1}{4}$ sec. cor. of sec. 3, bears S. $89^{\circ} 33'$ W., 35 lks. dist.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 10 ins. in the ground, in a mound of stone, $4\frac{1}{2}$ ft. base to top, with brass cap mkd.

WC
→
 $\frac{1}{4}$ S3
T25S R2W
1972

From the true point for the N. $\frac{1}{4}$ sec. cor. of sec. 3, T. 25 S., R. 2 W., the true point for the S. $\frac{1}{4}$ sec. cor. of sec. 34, T. 24 S., R. 2 W., bears S. $89^{\circ} 33'$ W., 5.83 chs. dist., hereinbefore described.

Reestablishment of the Survey Executed by
H. D. Page and G. C. Swan, Deputy Surveyors, in 1897

From the cor. of secs. 15, 16, 21 and 22.

S. $89^{\circ} 54'$ W., bet. secs. 16 and 21.

Over rough and broken mountainous land, with thick aspen and pine timber; asc. 375 ft. over NE. slope.

32.30 Top of main ridge, on Glenwood Mountain, bears NW. and SE.; desc. 135 ft. over rocky SW. slope with scattered aspen and pine timber.

40.01 The $\frac{1}{4}$ sec. cor. of secs. 16 and 21, monumented with a basalt stone, 30x12x10 ins., firmly set, protruding 15 ins. above ground, mkd. $\frac{1}{4}$ on the N. face and a scattered mound of stone to the NE.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 15 ins. in the ground, in a mound of stone, $4\frac{1}{2}$ ft. base to top, with brass cap mkd.

Dependent Resurvey of a Portion of the Subdivision,
T. 25 S. R. 2 W. Salt Lake Meridian Utah

CHAINS

T25S R2W

$$\frac{1}{4} \frac{S16}{S21}$$

1972

Bury the original cor. stone alongside the iron post.

S. 89° 54' W., beginning new measurement.

Desc. 800 ft. over steep rocky SW. slope; by triangulation.

35.25 Top of spur, slopes S.; desc. 100 ft. over W. slope to the cor.; end of triangulation.

40.03 The cor. of secs. 16, 17, 20 and 21, monumented with a basalt stone, 24x10x8 ins., firmly set, protruding 10 ins above the ground, mkd. 3 notches on the S. and 4 notches on the E. edge.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 14 ins. in the ground, in a mound of stone, 4½ ft. base to top, with brass cap mkd.

T25S R2W

$$\frac{S17|S16}{S20|S21}$$

1972

Bury the original cor. stone alongside the iron post.

N. 0° 14' W., bet. secs. 16 and 17.

Over rough and broken mountainous land, with scattered aspen and pine timber; along W. slope.

2.00 Slope changes; asc. 275 ft. over SW. slope.

13.30 Top of spur, slopes SW.; thence along W. slope of rock slide.

17.50 Spur, slopes N. 80° W.; desc. 325 ft. over steep N. slope; by triangulation.

21.00 Bottom of draw, drains NW.; thence along steep W. slope.

26.00 Spur, slopes N. 20° W.; desc. 800 ft. over steep and broken N. slope.

41.19 Point for the ¼ sec. cor. of secs. 16 and 17, at proportionate distance; there is no remaining evidence of the original cor.

Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground, in a mound of stone, 4½ ft. base to top, with brass cap mkd.

T25S R2W

$$\frac{1}{4} \frac{S17|S16}{S21}$$

1972

Dependent Resurvey of a Portion of the Subdivision,
T. 25 S., R. 2 W., Salt Lake Meridian, Utah

CHAINS

- Desc. 50 ft. over NW. slope.
- 43.00 Bottom of draw, drains NW.; thence along W. slope; end of triangulation.
- 46.00 Spur, slopes NW.; desc. 300 ft. over steep N. slope.
- 50.00 Bottom of draw, drains W.; thence along broken W. slope.
- 61.00 Spur, slopes W.; desc. 100 ft. over NW. slope.
- 65.00 Bottom of draw, drains W.; asc. 55 ft. over SW. slope.
- 74.00 Draw, drains W.; asc. 125 ft. over SW. slope.
- 78.00 Slope changes; thence along steep W. slope.
- 82.38 The cor. of secs. 8, 9, 16 and 17, monumented with a basalt stone, 16x10x9 ins., firmly set, protruding 8 ins. above ground, dimly mkd. 4 notches on the S. and E. edges.
- At the cor. point
- Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins. in the ground, in a mound of stone, 4½ ft. base to top, with brass cap mkd.
- | | |
|------|-----|
| T25S | R2W |
| S8 | S9 |
| S17 | S16 |
| 1972 | |
- Bury the original cor. stone alongside the iron post.
-
- From the cor. of secs. 9 and 16, on the W. bdy. of sec. 15.
- N. 88° 20' W., bet. secs. 9 and 16.
- Over mountainous land, with thick aspen and pine timber; asc. 35 ft. over NE. slope.
- 7.70 Top of ascent, slopes N.; desc. 30 ft. over NW. slope.
- 13.00 Bottom of descent, slopes N.; asc. 68 ft. over NE. slope.
- 24.10 Top of spur, slopes N.; desc. 100 ft. over NW. slope.
- 32.70 Bottom of descent, drains N.; enter small grassy meadow; thence along N. slope.
- 35.60 Enter thick pine and aspen timber, edge bears N. and S.; asc. 40 ft. over NE. slope.
- 40.12 Point for the ¼ sec. cor. of secs. 9 and 16, at proportionate distance; there is no remaining evidence of the original cor.
- Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground, in a collar of stone, with brass cap mkd.

Dependent Resurvey of a Portion of the Subdivision,
T. 25 S., R. 2 W., Salt Lake Meridian, Utah

CHAINS

T25S R2W

$$\frac{1}{4} \frac{S9}{S16}$$

1972

- Asc. 95 ft. over NE. slope.
- 47.70 Top of spur, slopes N.; desc. 16 ft. over NW. slope.
- 49.80 Bottom of descent, drains N.; asc. 70 ft. over NE. slope.
- 58.50 Top of high spur, slopes N. 40° W.; desc. 1200 ft. over steep and broken W. slope to the cor.; by triangulation.
- 80.24 The cor. of secs. 8, 9, 16 and 17; end triangulation.

General Description

Township 25 South, Range 2 West, is situated about 3 miles east of Monroe, Utah. The elevation in this portion of the township varies from 8,500 ft. to 11,000 ft. above sea level. The soil is mostly black loam with scattered basalt stone. The vegetation consists of shade-scale, sagebrush, meadow grass and other sparse native grasses. There is heavy stands of aspen and pine timber over most of this portion of the township.

There are several small lakes suitable for recreation as well as watering livestock. This portion of the township is accessible by numerous trail roads leading to the lakes, with the main road coming in from Annabella, Utah.

This portion of the township drains north, northwest and west.

The magnetic declination was read at a number of stations throughout the survey of these sections and the average of the several readings was found to be 14° 30' East.

CERTIFICATE OF SURVEY

~~I, (X) Jerry L. Thomas~~ , HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 16th day of June , 19 72. (I) ~~(X)~~ have dependently resurveyed a portion of the north and east boundaries and a portion of the subdivisional lines of Township 25 South, Range 2 West

of the Salt Lake Meridian, in the State of Utah , which are represented in the foregoing field notes as having been executed by (me), ~~(us)~~ and under (my) ~~(our)~~ direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

March 26, 1973
(Date)

Jerry L. Thomas
(Cadastral Surveyor)
Supervisory

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

SUBMITTED FOR APPROVAL
Date FEB 6 1975

BUREAU OF LAND MANAGEMENT
Washington, D.C.

The foregoing field notes of the dependent resurvey of a portion of the north and east boundaries and a portion of the subdivisional lines of Township 25 South, Range 2 West, Salt Lake Meridian, Utah

executed by Jerry L. Thomas, Supervisory Cadastral Surveyor having been critically examined and found correct, are hereby approved.

JAN 20 1975
(Date)

Bernard W. Johnson
(Chief, Division of Cadastral Survey)

CERTIFICATE OF TRANSCRIPT

~~I CERTIFY That the foregoing transcript of the field notes of the above described surveys is~~
is a true copy of the original field notes.

~~(Date) (Chief, Division of Cadastral Survey) and~~

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

R574

ORIGINAL
FIELD NOTES

OF THE

DEPENDENT RESURVEY OF THE N. 2 1/2 MILES OF

THE EAST BOUNDARY OF

TOWNSHIP 10 NORTH, RANGE 1 EAST

153

THE

N. 2 MILES OF THE EAST BOUNDARY

THE NORTH BOUNDARY

AND A

PORTION OF THE SUBDIVISION

OF

TOWNSHIP 10 NORTH, RANGE 2 EAST

154

153
154

Of the Salt Lake Meridian,

In the State of Utah

EXECUTED BY

Milton R. Workman Cadastral Surveyor

Under special instructions dated June 21, 19 72, approved June 22, 1972,

_____, which provided for the surveys included under U.S. Survey/Group
Number 542, and assignment instructions dated June 26, 19 72.

Survey commenced July 7, 19 72

Survey completed September 21, 19 73

INDEX DIAGRAM

Township 10 North, Range 2 East,
 13 12 11 10 9 8

7	6 30 29	5 25 28	4 22	3 19 21	2 16 18
6	29 7 27 26	8 24 25	9 20 23	10 17 20	11 14 16
4	18	17	16	15	14
	19	20	21	22	23
	30	29	28	27	26
	31	32	33	34	35
					36

T. 10 N., R. 2 E., Salt Lake Meridian, Utah

CHAINS

The following field notes are those of a dependent resurvey of the north 2½ miles of the east boundary of Township 10 North, Range 1 East, and a dependent resurvey of the north 2 miles of the east boundary, the north boundary and a portion of the subdivisional lines of Township 10 North, Range 2 East.

History of Surveys

Surveyed by Retr. or Resurveyed by

North Boundary

All	John T. Breckon 1893-94		
W. 3½ miles		Andrew P. Hanson	1901
E. 3½ miles		F. E. Joy	1904- 1905

East Boundary

All	John T. Breckon 1893		
N. 1½ miles		Andrew P. Hanson	1901

West Boundary

All	Andrew J. Stewart		
	1876		
S. 5 miles		John T. Breckon	1894

Subdivision

All	John T. Breckon 1894		
S. bdy. sec. 4		Ralph Gentry	1942

The dependent resurvey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 1947, and the Special Instructions dated June 21, 1972.

The directions of all lines were determined by the solar transit. The lines were carried forward by sustained angulation being supplemented by observations on Polaris taken throughout the progress of the survey.

The lengths of all lines were determined by chaining where possible; otherwise by traverse or triangulation. The details of such traverses or triangulations have been thoroughly verified and in order to simplify the record the diagrams and reduction are omitted from these field notes.

Prior to restoration of any corners, all necessary lines of the original survey were retraced and a diligent search was made for any evidence of the original monuments and other calls of the official record. Identified corners were remonumented in their original positions. Lost corners were reestablished at proportionate positions, but not until exhausting every reasonable possibility of finding direct evidence of the control of each corner.

The geographic position of the southeast corner of sec. 12, is at latitude 41° 36' 39" N. and longitude 111° 39' 40" W. as determined through section line ties from U.S.G.S. triangulation station "Bluff", which is a standard U.S.G.S. tablet, stamped "BLUFF 1954" cemented in limestone rock outcrop, located S. 11° 56' 30" E., 150.784 chains from the ¼ sec. cor. of secs. 6 and 7, T.. 10 N., R. 2 E.

T. 10 N., R. 2 E., Salt Lake Meridian, Utah

CHAIN

The mean magnetic declination was read at a number of stations throughout the progress of the survey and the average of these readings was found to be 16° 45' E.

Dependent Recovery of a Portion of the E. Boundary,
T. 10 N., R. 2 E., Salt Lake Meridian, Utah

Reestablishment of the Survey Executed by John L.
Breckon, Deputy Surveyor, in 1893

Beginning at the cor. of secs. 12 and 13, on the E. bdy. of the Twp., monumented with a limestone, 14x12x6 in., firmly set 9 ins. in the ground and in a mound of stone, and dimly mkd. 2 notches on the N. edge and a notch on the S. edge.

At the cor. point

Set an iron post, 30 ins. long, 2½ in. diam., 12 ins. in the ground to solid rock and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T10N
R2E R3E
S12
S13
1973

from which

A pine, 6 in. diam., bears N. 31° W., 26 lks. dist., mkd. C 31.

A pine, 18 in. diam., bears N. 62° W., 26 lks. dist., mkd. T10N R2E S12 31.

Bury the original corner stone alongside the iron post.

Cor. 18 located on steep N. slope, 50 lks. W. of small draw that drains N.

N. 0° 09' W., along the E. bdy. of sec. 12.

Descend over steep N. slope, through dense timber and undergrowth.

10.00 Draw, drains N. 50° E.; ascend over S. slope.

25.50 Ridge, bears NE. and SW.; descend over N. slope.

40.55 Point for the ¼ sec. cor. of sec. 12, at proportionate distance; there is no remaining evidence of the original corner.

Set an iron post, 30 ins. long, 2½ in. diam., 12 ins. in the ground to solid rock and in a mound of stone, 2½ ft. base to top, with brass cap mkd.

T10N
R2E|R3E
S12
1973

Dependent Resurvey of a Portion of the E. Boundary,
T. 10 N., R. 2 E., Salt Lake Meridan, Utah

CHAINS

from which

A pine, 18 ins. diam., bears S. 63° W., 75 lks.
dist., mkd. T10N R2E $\frac{1}{4}$ S12 BT.

Reestablishment of the Survey Executed by John T. Breckon,
Deputy Surveyor, in 1893, and the Resurvey Executed by
Andrew P. Hanson, Deputy Surveyor, in 1901.

48.50 Blacksmith Fork River, 50 lks. wide, drains W.; leave
timber.

52.50 Paved State Highway No. 101, bears E. and W.; ascend over
steep S. slope.

81.10 The cor. of secs. 1 and 12 on the E. bdy. of the Tp.,
monumented with a limestone, 16x9x5 ins., firmly set 5 ins.
in the ground, and plainly mkd. 1 notch on the N. edge and
5 notches on the S. edge.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in
the ground to solid rock and in a mound of stone, 3 ft.
base to top, with brass cap mkd.

T10N
R2E|R3E
 $\frac{S1}{S12}$ |S6
1973

Bury the original corner stone alongside the iron post.

N. 0° 15' E., along the E. bdy. of sec. 1.

Ascend over steep S. slope, through sagebrush.

40.57 The $\frac{1}{4}$ sec. cor. of sec. 1, monumented with a sandstone,
12x10x8 ins., firmly set 6 ins. in the ground, and plainly
mkd. $\frac{1}{4}$ on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 8 ins.
in the ground to solid rock and in a mound of stone, 3½
ft. base to top, with brass cap mkd.

T10N
R2E|R3E
 $\frac{1}{4}$ |
S1|
1973

Bury the original corner stone alongside the iron post.

N. 1° 07' W., beginning new measurement.

Continue ascend over steep S. slope.

Dependent Resurvey of a Portion of the E. Boundary,
T. 11 N., R. 2 E., Salt Lake Meridian, Utah

CHAINS

- 17.50 Top of mountain, bears E. and W.; enter mahogany and scattered timber.
- 40.53 The cor. of Tps. 10 and 11 N., R. 2 E., monumented with a sandstone, 18x10x5 ins., firmly set 12 ins. in the ground, and plainly mkd. 6 notches on the N., S. and W. edges.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground to solid rock and in a mound of stone, 2 ft. base to top, with brass cap mkd.

T11N
R2E|R3E
S36|
S1|
T10N
1973

from which

A pine, 30 ins. diam., bears S. 40° W., 116 lks. dist., mkd. T10N R2E S1 BT.

A pine, 24 ins. diam., bears N. 55° W., 14 lks. dist., mkd. T11N R2E S36 BT.

Bury the original corner stone alongside the iron post.

Cor. is located on gentle E. slope in dense undergrowth.

Dependent Resurvey of a Portion of the E. Boundary,
T. 10 N., R. 1 E., Salt Lake Meridian, Utah

Reestablishment of the Survey Executed by Andrew J. Stewart, Deputy Surveyor, in 1876, and the Resurvey Executed by John T. Breckon, Deputy Surveyor, in 1894.

From the ¼ sec. cor. of sec. 13, on the E. bdy. of T. 10 N., R. 1 E., monumented with a limestone, 18x10x8 ins. firmly set 9 ins. in the ground, and dimly mkd. ¼ on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T10N
R1E|R2E
¼|
S13|
1973

Bury the original cor. stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

Cor. is located 50 lks. E. and 50 lks. N. of rock ledge.

Dependent Resurvey of a Portion of the E. Boundary,
T. 10 N., R. 1 E., Salt Lake Meridian Utah

CHAINS

N. 0° 21' W., along the E. bdy. of sec. 13.

Ascend over gentle S. slope through mahogany and sagebrush.

10.00 Spur, slopes W.; descend over steep N. slope; enter dense timber and undergrowth.

40.12 The closing cor. of secs. 7 and 18, T. 10 N., R. 2 E., monumented with a limestone, 18x12x5 ins., firmly set 10 ins. in the ground, and dimly mkd. 2 notches on the N. edge, 4 notches on the S. edge and CC on the E. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T10N
R1E|R2E
S13|C S7
1973

from which

A pine, 14 ins. diam., bears N. 52° E., 54 lks. dist., mkd. T10N R2E S7 CC BT.

A pine, 14 ins. diam., bears S. 45° E., 7 lks. dist., mkd. T10N R2E S18 CC BT.

Bury the original corner stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 2 ft. high, N. of cor.

41.63 The cor. of secs. 12 and 13, monumented with a limestone, 12x10x6 ins., firmly set 6 ins. in the ground and in a mound of stone, and dimly mkd. 2 notches on the N. edge and 4 notches on the S. edge.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T10N
R1E|R2E
S12|S7
S13|
1973

from which

A pine, 14 ins. diam., bears S. 45° W., 31 lks. dist., mkd. T10N R1E S13 BT.

A pine, 12 ins. diam., bears N. 31° W., 25 lks. dist., mkd. T10N R1E S12 BT.

Bury the original corner stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of corner.

Dependent Resurvey of a Portion of the E. Boundary,
T. 10 N., R. 1 E., Salt Lake Meridian, Utah

CHAINS

N. $0^{\circ} 14'$ W., along the E. bdy. of sec. 12.

Descend over steep N. slope, through dense timber and undergrowth.

45.80 Blacksmith Fork River, drains W.

46.49 The $\frac{1}{4}$ sec. cor. of sec. 12, monumented with a limestone, 18x14x10 ins., firmly set 8 ins. in the ground, and dimly mkd. $\frac{1}{4}$ on W. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground and in a collar of stone, with brass cap mkd.

T10N
R1E|R2E
 $\frac{1}{4}$ |
S12|
1973

Bury the original corner stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

No suitable bearing trees available.

N. $0^{\circ} 10'$ W., beginning new measurement.

.95 Centerline of paved State Highway No. 101, bears E. and W.; ascend over steep S. slope.

38.75 The closing corner of secs. 6 and 7, T. 10 N., R. 2 E., monumented with a broken limestone, mkd. CC, lying in a mound of stone.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 3 ins. in the ground to solid rock and in a mound of stone, 4 ft. base to top, with brss cap mkd.

T10N
R1E|R2E
S12|S6 CC
S7
1973

Bury the original corner stone alongside the iron post.

No suitable bearing trees available.

Cor. is located on top of cliff.

40.74 The cor. of secs. 1 and 12, monumented with a limestone, 10x6x6 ins., firmly set 4 ins. in the ground and plainly mkd. 1 notch on the N. edge and 5 notches on the S. edge.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

Dependent Resurvey of a Portion of the E. Boundary,
T. 10 N., R. 1 E., Salt Lake Meridian, Utah

CHAINS

T10N
R1E|R2E
S1 | S6
S12 |
1973

Bury the original corner stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of cor.

No suitable bearing trees available.

Cor. is located at base to cliff, 150 ft. high, facing S.

Reestablishment of the Survey Executed by Andrew
J. Stewart, Deputy Surveyor, in 1876

N. 0° 37' W., along the E. bdy. of sec. 1.

Ascend over steep S. slope, through scattered timber and undergrowth.

38.00 Point for the $\frac{1}{4}$ sec. cor. of sec. 1, at proportionate distance; there is no remaining evidence of the original corner.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins. in the ground and in a collar of stone, with brass cap mkd.

T10N
R1E|R2E
 $\frac{1}{4}$ |
S1 |
1973

No suitable bearing trees available.

Cor. is located on steep SW. slope.

55.50 Top of mountain, bears E. and W.; leave timber.

76.00 The cor. of Tps. 10 and 11 N., Rs. 1 and 2 E., monumented with a limestone, 18x10x6 ins., firmly set 8 ins. in the ground, and plainly mkd. 6 notches on the N., S., E. and W. edges.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground and in a collar of stone, with brass cap mkd.

T11N
R1E|R2E
S36 | S31
S1 | S6
R1E|R2E
T10N
1972

Bury the original corner stone alongside the iron post.

Cor. is located on steep W. slope in dense maple grove.

Dependent Resurvey of a Portion of the E. Boundary,
T. 10 N., R. 2 E., Salt Lake Meridian, Utah

CHAINS

Watch out for rattlesnakes, one may be waiting to get revenge. We had to kill one here the day we remonumented this corner, for one was curled at the base of the original stone corner, ready to defend its position from intruders.

Dependent Resurvey of the North Boundary,
T. 10 N., R. 2 E., Salt Lake Meridian, Utah

Reestablishment of the Survey Executed by John T. Breckon, Deputy Surveyor, in 1893-94, and the Resurvey Executed by F. E. Joy, U.S. Surveyor, in 1904-05.

From the cor. of Tps. 10 and 11 N., R. 2 E., heretofore described.

S. 88° 12' W., bet. secs. 1 and 36.

Ascend over mountainous land through dense timber and undergrowth.

39.72 The $\frac{1}{4}$ sec. cor. of secs. 1 and 36, monumented with a limestone, 24x18x4 ins., firmly set 10 ins. in the ground, and plainly mkd. $\frac{1}{4}$ on N. face.

from which

A mahogany, 6 ins. diam., bears N. 85° W., 60 lks. dist., mkd. $\frac{1}{4}$ S36 BT.

A mahogany, 6 ins. diam., bears S. 5° W., 40 lks. dist., mkd. $\frac{1}{4}$ S1 BT.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 8 ins. in the ground, to solid rock and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T11N R2E

$\frac{1}{4}$ S36

S1

T10N

1973

Bury the original corner stone alongside the iron post.

S. 88° 08' W., beginning new measurement.

- 1.30 Head of small draw, drains S. 25° E.
- 3.00 Descend over steep rocky SW. slope.
- 24.00 Draw, drains S.; ascend over steep E. slope.
- 37.34 The witness cor. for secs. 1, 2, 35 and 36, monumented with a limestone, 24x14x6 ins., firmly set 10 ins. in the ground, and plainly mkd. 1 notch on the E. edge and 5 notches on the W. edge, with WC on N. face.

Dependent Resurvey of the North Boundary,
T. 10 N. R. 2 E. Salt Lake Meridian, Utah

CHAINS

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

W C
T11N R2E
← S35 | S36
S2 | S1
T10N
1973

Bury the original corner stone alongside the iron post.

No suitable bearing trees available.

- 37.40 An iron post, U.S. Forest Reserve Boundary Post No. 21, 4 ins. diam., protruding 12 ins. above ground.
- 38.54 The true point for the cor. of secs. 1, 2, 35 and 36, falls in ledges and unsafe ground.

S. 88° 12' W., bet. secs. 2 and 35.

Ascend over steep E. slope, through dense timber and undergrowth.

- 3.95 Top of spur, slopes S.; descend over steep W. slope.
- 14.50 Draw, drains S.; ascend over steep E. slope.
- 25.25 Spur, slopes S.; descend over steep W. slope.
- 37.98 The ¼ sec. cor. of secs. 2 and 35, monumented with a granite stone, 20x12x8 ins., firmly set 10 ins. in the ground, and plainly mkd. ¼ on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 12 ins. in the ground to solid rock and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T11N R2E
S35
¼ S2
T10N
1973

Bury the original corner stone alongside the iron post.

No suitable bearing trees available.

S. 88° 14' W., beginning new measurement.

- 12.00 Draw, drains S.; ascend over steep E. slope.
- 23.00 Ridge, bears N. and S.; descend over steep W. slope.
- 40.04 The cor. of secs. 2, 3, 34 and 35, monumented with a limestone, 18x12x8 ins., firmly set 8 ins. in the ground, and plainly mkd. 2 notches on the E. edge and 4 notches on the W. edge.

Dependent Resurvey of the North Boundary,
T. 10 N., R. 2 E., Salt Lake Meridian Utah

CHAINS

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 12 ins. in the ground to solid rock and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T11N R2E
S34 | S35
S3 | S2
T10N
1973

Bury the original corner stone alongside the iron post.

No suitable bearing trees available.

Cor. is located on steep W. slope.

S. $88^{\circ} 16'$ W., bet. secs. 3 and 34.

Descend over steep W. slope, through dense timber and undergrowth.

- .06 An iron U.S. Forest Reserve Boundary Post No. 20, 4 ins. diam., protruding 12 ins. above ground.
- 34.00 Left Fork Blacksmith Fork River, drains irregularly S.
- 36.74 An iron post, U.S. Forest Service Boundary Post No. 19, 4 ins. diam., protruding 12 ins. above ground.
- 37.00 Canyon road, bears N. 18° E. and S. 18° W.; ascend over gentle E. slope.
- 40.41 The $\frac{1}{4}$ sec. cor. of secs. 3 and 34, monumented with a limestone, 16x9x6 ins., firmly set 8 ins. in the ground, and plainly mkd. $\frac{1}{4}$ on N. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T11N R2E
 $\frac{1}{4}$ S34
S3
T10N
1973

Bury the original corner stone alongside the iron post.

No suitable bearing trees available.

Reestablishment of the Survey Executed by John T. Breckon Deputy Surveyor, in 1893-94, the Resurvey Executed by Andrew P. Hanson, Deputy Surveyor, in 1901 and the Resurvey Executed by F. E. Joy, U.S. Surveyor, in 1904-05.

N. $88^{\circ} 29'$ W., beginning new measurement.

Dependent Resurvey of the North Boundary,
T. 10 N. R. 2 E. Salt Lake Meridian, Utah

CHAINS

Ascend over steep E. slope.

38.91 Point selected for the witness cor. of secs. 3, 4, 33 and 34.

Set an iron post, 30 ins. long, 2½ ins. diam., 2 ins. in the ground to solid rock and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T11N R2E
W|C
← S33 | S34
S4 | S3
T10N R2E
1972

No suitable bearing trees available.

Witness cor. is located at base of cliffs 150 ft. high, facing E.

38.99 Point for the cor. of secs. 3, 4, 33 and 34, at proportionate distance; falls on vertical cliffs; there is no remaining evidence of the original corner.

N. 88° 29' W., bet. secs. 4 and 33.

Ascend over steep E. slope, through dense timber and undergrowth.

10.05 Rocky narrow spur, projects sharply S.; ascend along steep S. slope.

24.00 Top of mountain, bears NE. and SW.; descend over SW. slope.

38.99 The ¼ sec. cor. of secs. 4 and 33, monumented with a limestone, 17x9x7 ins., firmly set 8 ins. in the ground, and plainly mkd. ¼ on N. face.

from which

A spruce, 20 ins. diam., bears S. 13° 15' E.,
59 lks. dist., mkd. ¼ S4 BT.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, with brass cap mkd.

T11N R2E
¼ S33
S4
T10N R2E
1972

Bury the original corner stone alongside the iron post.

Reestablishment of the Survey Executed by John T. Breckon, Deputy Surveyor, in 1893-94, and the Resurvey Executed by Andrew P. Hanson, Deputy Surveyor, in 1901.

Dependent Resurvey of the North Boundary,
T. 10 N., R. 2 E., Salt Lake Meridian, Utah

CHAINS

N. 86° 20' W., beginning new measurement.

41.58 The cor. of secs. 4, 5, 32 and 33, monumented with a limestone, 15x10x6 ins., firmly set 6 ins. in the ground, and plainly mkd. 4 notches on the E. edge and 2 notches on the W. edge.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T11N R2E
S32|S33
S5 | S4
T10N R2E
1972

Bury the original corner stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 2 ft. high, N. of corner.

No suitable bearing trees available.

N. 86° 36' W., bet. secs. 5 and 32.

Ascend over steep NE. slope by triangulation, through dense timber and undergrowth.

7.80 Trail road, bears N. 45° W. and S. 45° E.

39.71 The ¼ sec. cor. of secs. 5 and 32, monumented with a sandstone, 18x12x6 ins., firmly set 8 ins. in the ground, and plainly mkd. ¼ on N. face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T11N R2E
¼ S32
S5
T10N R2E
1972

Bury the original corner stone alongside the iron post.

Raise a mound of stone, 2½ ft. base, 1½ ft. high, N. of corner.

No suitable bearing trees available.

N. 84° 49' W., beginning new measurement.

37.15 Head of spring, drains N.

40.62 The cor. of secs. 5, 6, 31 and 32, monumented with a sandstone, 20x8x6 ins., firmly set 10 ins. in the ground, and plainly mkd. 5 notches on the E. edge and 1 notch on the W. edge.

At the cor. point

Dependent Resurvey of the North Boundary,
T. 10 N., R. 2 E., Salt Lake Meridian, Utah

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 20 in. in the ground, with brass cap mkd.

T11N R2E
S31 | S32
S6 | S5
T10N R2E
1972

from which

A fir, 6 ins. diam., bears N. 82° 45' E., 42 lks. dist., mkd. T11N R2E S32 BT.

No other trees available.

Bury the original corner stone alongside the iron post.

Raise a mound of stone, 2½ ft. base, 1½ ft. high, W. of corner.

N. 85° 50' W., bet. secs. 6 and 31.

Ascend along broken N. slope, through scattered timber and dense undergrowth.

40.14 Point for the ¼ sec. cor. of secs. 6 and 31, at proportionate distance; there is no remaining evidence of the original corner.

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground and in a collar of stone, with brass cap mkd.

T11N R2E
¼ S31
S6
T10N R2E
1972

No suitable bearing trees available.

57.40 Top of ridge dividing Blacksmith Fork and Millville Canyon watershed, bears NW. and SE.; end triangulation. Leave timber and undergrowth, descend over steep W. slope.

73.80 The cor. of Tps. 10 and 11 N., Rs. 1 and 2 E., heretofore described.

Dependent Resurvey of a Portion of the Subdivisional Lines, T. 10 N., R. 2 E., Salt Lake Meridian, Utah

Reestablishment of the Survey Executed by
John T. Breckon, Deputy Surveyor, in 1894

From the cor. of secs. 12 and 13, on the E. bdy. of the Tp., heretofore described.

N. 89° 03' W., bet. secs. 12 and 13.

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 10 N., R. 2 E., Salt Lake Meridian, Utah

CHAINS

- Ascend over steep NE. slope, through dense timber and undergrowth.
- 40.19 Point for the $\frac{1}{4}$ sec. cor. of secs. 12 and 13, at proportionate distance; there is no remaining evidence of the original corner.
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground and in a collar of stone, with brass cap mkd.
- T10N R2E
 $\frac{1}{4}$ $\frac{S12}{S13}$
1973
- from which
- A pine, 10 ins. diam., bears S. 10° W., 15 lks. dist., mkd. BT.
- No other trees available.
- 62.50 Top of steep ascend; thence over gentle E. slope.
- 80.38 The cor. of secs. 11, 12, 13 and 14, monumented with a limestone, 16x8x6 ins., firmly set 8 ins. in the ground, and plainly mkd. 1 notch on the E. edge and 4 notches on the S. edge.
- At the cor. point
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins. in the ground and in a collar of stone, with brass cap mkd.
- T10N R2E
 $\frac{S11|S12}{S14|S13}$
1973
- from which
- A pine, 14 ins. diam., bears N. 10° E., 64 lks. dist., mkd. T10N R2E S12 BT.
- A pine, 14 ins. diam., bears S. 67° E., 53 lks. dist., mkd. T10N R2E S13 BT.
- A pine, 20 ins. diam., bears N. 78° W., 115 lks. dist., mkd. T10N R2E S11 BT.
- Bury the original corner stone alongside the iron post.
- Cor. is located on steep E. slope.
-
- N. $0^\circ 47'$ E., bet. secs. 11 and 12.
- Over broken mountain top, through dense timber and undergrowth.
- 20.85 Begin descend over steep N. slope by triangulation.
- 35.87 Point selected for the witness $\frac{1}{4}$ sec. cor. of secs. 11 and 12.

Dependent Resurvey of a Portion of the Subdivisional
 Township 10 N., R. 2 E., S. 10 T., Indian, Mich.

CHAINS

Set an iron post, 30 ins. long, 2½ ins. diam., 16 ins. in the ground to solid rock and in a mound of stone, 3 ft. base to top, with brass cap mkd.

W C
 T10N R2E
 ¼
 S11 ↑ S12
 1973

No suitable bearing trees available.

Cor. is located on point of high ledge, bearing W. and S.

39.00 Point for the ¼ sec. cor. of secs. 11 and 12, at proportionate distance, falls on inaccessible and precipitous N. slope of ledges; there is no remaining evidence of the original cor.

Continue over steep N. slope, through dense timber and undergrowth.

78.00 Point for the cor. of secs. 1, 2, 11 and 12, at proportionate distance; there is no remaining evidence of the original corner; end triangulation.

Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to solid rock and in a mound of stone, 6 ft. base to top, with brass cap mkd.

T10N R2E
 S2 | S1
 S11 | S12
 1973

No suitable bearing trees available.

Cor. is located on steep NW. slope 1.00 chains S. of ledge, 20 ft. high, bears E. and W.

From the cor. of secs. 1 and 12, on the E. bdy. of the Tp., hereinbefore described.

S. 88° 47' W., bet. secs. 1 and 12.

Descend over SW. slope, through sagebrush.

31.30 Paved State Highway No. 101, bears NW. and SE. on a curve

32.29 Point selected for the witness ¼ sec. cor. of secs. 1 and 12.

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

W C
 T10N R2E
 ¼ ← S1
 S12
 1973

Raise a mound of stone, 3 ft. base, 1½ ft. high, N. of cor.

Dependent Resurvey of a Portion of the Subdivisional
Lines T. 10 N., R. 2 E., Salt Lake Meridian, Utah

CHAINS

- 33.00 Enter reservoir.
- 34.00 Power line, bears N. 70° W. and S. 70° E.
- 39.63 Point for the ¼ sec. cor. of secs. 1 and 12, at proportionate distance, falls in reservoir; there is no remaining evidence of the original corner.
- 53.00 Leave reservoir, ascend over steep NE. slope. Enter dense timber and undergrowth.
- 79.26 The cor. of secs. 1, 2, 11 and 12.

N. 0° 18' E., bet. secs. 1 and 2.

Descend over steep N. slope, through dense timber and undergrowth.

- 12.50 Blacksmith Fork River, drains W.
 - 13.50 Paved State Highway No. 101, bears E. and W.; ascend over steep S. slope.
 - 39.00 Point for the ¼ sec. cor. of secs. 1 and 2, at proportionate distance; there is no remaining evidence of the original corner.
- Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground to solid rock and in a mound of stone, 3½ ft. base to top, with brass cap mkd.

T10N R2E
¼
S2|S1
1973

No suitable bearing trees available.

Continue to ascend over steep S. slope.

- 80.38 The true point for the cor. of secs. 1, 2, 35 and 36, on the N. bdy. of the Tp., heretofore described.

From the cor. of secs. 11, 12, 13 and 14.

N. 88° 19' W., bet. secs. 11 and 14.

Ascend over NE. slope, through dense timber and undergrowth.

- 30.40 High ridge, bears N. and S.; descend over steep W. slope.
 - 39.55 Point for the ¼ sec. cor. of secs. 11 and 14, at proportionate distance; there is no remaining evidence of the original corner.
- Set an iron post, 30 ins, long, 2½ ins. diam., 18 ins. in the ground to solid rock and in a mound of stone, 3 ft. base to top, with brass cap mkd.

Dependent Resurvey of a Portion of the Subdivisional
Lines T. 10 N., R. 2 E., Salt Lake Meridian Utah

CHAINS

T10N R2E
 $\frac{1}{4}$ $\frac{S11}{S14}$
1973

from which

A pine, 10 ins. diam., bears S. 10° E., 11 lks.
dist., mkd. $\frac{1}{4}$ S14 BT.

Continue descend over steep W. slope.

79.10 The cor. of secs. 10, 11, 14 and 15, monumented with a limestone, 14x8x8 ins., firmly set 10 ins. in the ground, and plainly mkd. 2 notches on the E. edge and 4 notches on the S. edge.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 18 ins. in the ground to solid rock and in a mound of stone, 3 ft. base to top, with brass cap mkd.

T10N R2E
 $\frac{S10|S11}{S15|S14}$
1973

from which

A pine, 8 ins. diam., bears N. 52° E., 39 lks.
dist., mkd. T10N R2E S11 BT.

An aspen, 6 ins. diam., bears S. 40° W., 2 lks.
dist., mkd. T10N R2E S15 BT.

No other trees available.

Bury the original corner stone alongside the iron post.

N. 0° 42' E., bet. secs. 10 and 11.

Over broken mountain land through dense timber and undergrowth.

.50 Left fork of Big Hollow, drains W., ascend over broken steep SW. slope.

18.69 Point for the S. 1/16 sec. cor. of secs. 10 and 11.

Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground and in a collar of stone, with brass cap mkd.

T10N R2E
S 1/16
 $\frac{S10|S11}{S15|S14}$
1973

from which

A pine, 24 ins. diam., bears S. 29° E., 38 lks.
dist., mkd. S 1/16 S11 BT.

A juniper, 6 ins. diam., bears N. 88° W., 44
lks. dist., mkd. S 1/16 S10 BT.

Dependent Resurvey of a Portion of the Subdivisional
Lines T. 10 N. R. 2 E. Salt Lake Meridian U.S.

CHAINS

- 32.00 Ridge, bears NW. and SE.; descend over steep N. slope.
- 37.08 Point selected for the witness $\frac{1}{4}$ sec. cor. of secs. 10 and 11.
- Set an iron post, 18 ins., long. 1 in. diam., 2 ins. in the ground to solid rock and in a mound of stone, 3 ft. base to top, with brass cap mkd.
- W C
T10N R2E
 $\frac{1}{4}$
S10[↑]S11
1973
- 37.38 Point for the $\frac{1}{4}$ sec. cor. of secs. 10 and 11, at proportionate distance, falls on inaccessible and precipitous limestone ledge; there is no remaining evidence of the original corner.
- 52.00 Draw, drains N. 45° W.; ascend over steep SW. slope.
- 68.65 High ledgy point of ridge, bears NW. and SE.; descend over steep NE. slope.
- 74.76 The cor. of secs. 2, 3, 10 and 11, monumented with a deteriorated limestone, 18x10x6 ins., firmly set 8 ins. in the ground and in a mound of stone, notches have been obliterated.
- At the cor. point
- Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone, with brass cap mkd.
- T10N R2E
S3 | S2
S10 | S11
1973
- from which
- A pine, 10 ins. diam., bears S. 70° E., 35 lks. dist., mkd. T10N R2E S11 BT.
- A pine, 6 ins. diam., bears N. 65° W., 33 lks. dist., mkd. T10N R2E S3 BT.
- No other trees available.
- Bury the original corner stone alongside the iron post.
-
- From the cor. of secs. 1, 2, 11 and 12.
- S. 89° 25' W., bet. secs. 2 and 11.
- Along N. slope, through dense timber and undergrowth.
- 39.61 Point for the $\frac{1}{4}$ sec. cor. of secs. 2 and 11, at proportionate distance; there is no remaining evidence of the original corner.
- Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground and in a collar of stone, with brass cap mkd.

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 10 N., R. 2 E., Salt Lake Meridian, Utah

CHAINS

T10N R2E

$$\frac{1}{4} \frac{S2}{S11}$$

1973

from which

A spruce, 6 ins. diam., bears N. 5° E., 6 lks.
dist., mkd. $\frac{1}{4}$ S2 BT.

A spruce, 12 ins. diam., bears S. 5° W., 12 lks.
dist., mkd. $\frac{1}{4}$ S11 BT.

40.60 Spur, slopes N.

79.22 The cor. of secs. 2, 3, 10 and 11.

N. 2° 54' E., bet. secs. 2 and 3.

Descend over steep N. slope, through dense timber and
undergrowth.

22.95 Blacksmith Fork River, drains W.

24.40 Paved State Highway No. 101, bears NE. and NW. on a curve;
ascend over steep broken SE. slope.35.95 The $\frac{1}{4}$ sec. cor. of secs. 2 and 3, monumented with a 1 in.
rebar, protruding 18 ins. above ground. This point is
being used by the local land owners and by the county
surveyor, as the $\frac{1}{4}$ sec. cor. and is accepted as the best
existing evidence of the position of the original cor.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T10N R2E

$$\frac{1}{4} \frac{S3|S2}{S11}$$

1973

Raise a mound of stone, 3 ft. base, 1½ ft. high, W. of
corner.

No suitable bearing trees available.

N. 0° 13' W., beginning new measurement.

Continue to ascend over steep SE. slope.

23.80 Ridge, bears NE. and SW.; descend along W. slope.

42.86 The cor. of secs. 2, 3, 34 and 35, on the N. bdy. of
the Tp., heretofore described.

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 10 N., R. 2 E., Salt Lake Meridian. Utah

CHAINS

- From the cor. of secs. 10, 11, 14 and 15.
- N. 89° 49' W., bet. secs. 10 and 15.
- Descend over steep W. slope, through dense timber and undergrowth.
- 38.00 Trail road in bottom of Big Hollow, bears N. and S.; ascend over steep E. slope.
- 39.50 Spur, slopes N.
- 40.43 The $\frac{1}{4}$ sec. cor. of secs. 10 and 15, monumented with a sandstone, 18x12x5 ins., firmly set 8 ins. in the ground, and plainly mkd. $\frac{1}{4}$ on N. face.
- At the cor. point
- Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 18 ins. in the ground to solid rock and in a mound of stone, 3 ft. base to top, with brass cap mkd.
- | |
|---------------------------------|
| T10N R2E |
| $\frac{1}{4}$ $\frac{S10}{S15}$ |
| 1973 |
- Bury the original cor stone alongside the iron post.
- No suitable bearing trees available.
- Cor. is located on W. slope of small spur, slopes N.
-
- N. 89° 36' W., beginning new measurement.
- 40.07 The cor. of secs. 9, 10, 15 and 16, monumented with a quartzite stone, 16x12x8 ins., firmly set 6 ins. in the ground and dimly mkd. 3 notches on the E. edge and 4 notches on the S. edge.
- At the cor. point
- Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 18 ins. in the ground to solid rock and in a mound of stone, 3 ft. base to top, with brass cap mkd.
- | |
|------------------------------------|
| T10N R2E |
| $\frac{S9}{S16} \frac{S10}{S15}$ |
| 1973 |
- Bury the original corner stone alongside the iron post.
- No suitable bearing trees available.
-
- N. 1° 11' E., bet. secs. 9 and 10.
- Descend over steep NE. slope, through dense timber and undergrowth.
- 41.22 Point for the $\frac{1}{4}$ sec. cor. of secs. 9 and 10, at proportionate distance; there is no remaining evidence of the original corner.

Dependent Resurvey of a Portion of the Subdivisional
 T10N R2E, S9|S10, Salt Lake Co., Idaho, USA

CHAINS

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T10N R2E

$\frac{1}{4}$
 S9|S10
 1973

Raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

No suitable bearing trees available.

45.45 Spur, slopes E.

82.44 The cor. of secs. 3, 4, 9 and 10, monumented with an iron post, 2 ins. diam., protruding 12 ins. above ground, with brass cap mkd.

T10N R2E

S4|S3
 S9|S10
 1942

From the cor. of secs. 2, 3, 10 and 11.

N. $84^{\circ} 23'$ W., bet. secs. 3 and 10.

Over broken mountain land, through dense timber and undergrowth.

10.00 Spur, slopes N.

20.00 Draw, drains N.

30.00 Spur, slopes N.

39.40 Draw, drains irregularly NW.

39.88 Small spur, slopes N. Point for the $\frac{1}{4}$ sec. cor. of secs. 3 and 10, at proportionate distance; there is no remaining evidence of the original corner.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins. in the ground and in a collar of stone, with brass cap mkd.

T10N R2E

$\frac{1}{4}$ S3
 S10
 1973

from which

A pine, 12 ins. diam., bears S. 68° E., 45 lks. dist., mkd. $\frac{1}{4}$ S10 BT.

A pine, 8 ins. diam., bears N. $80^{\circ} 30'$ W., 12 lks. dist., mkd. $\frac{1}{4}$ S3 BT.

40.40 Draw, drains irregularly N.

68.50 Spur, slopes NW.

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 10 N., R. 2 E., Salt Lake Meridian, Utah

- 19.31 Big Hollow, drains irregularly N.
19.36 The cor. of secs. 3, 4, 9 and 10.

N. 1° 22' E., bet. secs. 3 and 4.

Over bottom land, through dense undergrowth.

- 2.50 Big Hollow, drains N. 10° W.
13.25 Blacksmith Fork River, drains W.
13.75 Point for the S. 1/16 sec. cor. of secs. 3 and 4.

Set an iron post, 30 ins. long, 2½ ins. diam., 28 ins.
in the ground, with brass cap mkd.

T10N R2E
S 1/16
S4|S3
1973

from which

A Box Elder, 24 ins. diam., bears N. 29° 30' E.,
66 lks. dist., mkd. BT.

A Box Elder, 22 ins. diam., bears N. 72° 40' W.,
34 lks. dist., mkd. BT.

- 21.20 Paved State Highway No. 101, bears SE. and SW. on a curve,
Ascend over steep S. slope, through scattered timber and
undergrowth.
37.50 The ¼ sec. cor. of secs. 3 and 4, monumented with a
limestone, 18x10x6 ins., firmly set 6 ins. in the
ground and in a mound of stone, and dimly mkd. ¼ on W.
face.

At the cor. point

Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T10N R2E
¼
S4|S3
1973

Bury the original corner stone alongside the iron post.

No suitable bearing trees available.

Cor. is located on steep S. slope.

N. 1° 22' E., beginning new measurement.

Continue ascend over steep S. slope.

- 21.15 Top of high ridge, bears E. and W.; descend over steep
N. slope.
11.66 True point for the cor. of secs. 3, 4, 33 and 34, on the

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 10 N., R. 2 E., Salt Lake Meridian, Utah

CHAINS

N. bdy. of the Tp., heretofore described.

From the cor. of secs. 9, 10, 15 and 16.

S. 89° 56' W., bet. secs. 9 and 16.

Ascend over steep E. slope, through dense timber and undergrowth.

8.90 Ridge, bears N. and S.; descend over steep W. slope.

25.00 Draw, drains N.; ascend over steep E. slope.

42.56 Top of ridge, bears N. and S.

The $\frac{1}{4}$ sec. cor. of secs. 9 and 16, monumented with a limestone, 18x10x5 ins., firmly set 10 ins. in the ground, and plainly mkd. $\frac{1}{4}$ on N. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins. in the ground and in a collar of stone, with brass cap mkd.

T10N R2E

$\frac{1}{4}$ $\frac{S9}{S16}$

1973

from which

A pine, 18 ins. diam., bears S. 20° E., 82 lks. dist., mkd. $\frac{1}{4}$ S16 BT.

A pine, 14 ins. diam., bears N. 45° W., 102 lks. dist., mkd. $\frac{1}{4}$ S9 BT.

Bury the original corner stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 2 ft. high, N. of corner.

S. 81° 51' W., beginning new measurement.

Descend over steep W. slope.

27.50 Draw, drains N.; ascend over steep E. slope.

30.52 The cor. of secs. 8, 9, 16 and 17, monumented with a broken limestone, with 4 notches plainly visible, other notches have been obliterated. Bottom portion of stone, 10x8x6 ins., firmly set 8 ins. in the ground.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 20 ins. in the ground and in a collar of stone, with brass cap mkd.

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 10 N., R. 2 E., Salt Lake Meridian, Utah

CHAINS

T10N R2E
S8 | S9
S17 | S16
1973

from which

A pine, 14 ins. diam., bears N. 85° E., 65 lks.
dist., mkd. T10N R2E S16 BT.

No other trees available.

Bury the original corner stone alongside the iron post.

Cor. is located on N. slope in dense undergrowth.

N. 1° 48' W., bet. secs. 8 and 9.

Descend over steep NE. slope, through dense timber and
undergrowth.

49.94 The $\frac{1}{4}$ sec. cor. of secs. 8 and 9, monumented with a
limestone, 16x12x6 ins., firmly set 8 ins. in the
ground, and plainly mkd. $\frac{1}{4}$ on W. face.

At the cor. point

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 8 ins. in
the ground to solid rock and in a mound of stone, 3 ft.
base to top, with brass cap mkd.

T10N R2E
 $\frac{1}{4}$
S8 | S9
1973

Bury the original corner stone alongside the iron post.

No suitable bearing trees available.

Cor. is located on steep NE. slope.

N. 0° 54' W., beginning new measurement.

Continue to descend over steep NE. slope.

18.61 Point for the N. 1/16 sec. cor. of secs. 8 and 9.

Set an iron post, 30 ins. long, 2 $\frac{1}{2}$ ins. diam., 20 ins.
in the ground, with brass cap mkd.

T10N R2E
N 1/16
S8 | S9
1973

Raise a mound of stone, 2 $\frac{1}{2}$ ft. base, 1 $\frac{1}{2}$ ft. high, W.
of cor.

23.20 Blacksmith Fork River, drains W.

24.60 Paved State Highway No. 101, bears E. and W.; ascend over
steep S. slope.

Dependent Resurvey of a Portion of the Subdivisional
Lines T. 10 N., R. 2 E., Cal. 1884-1885, Idaho, Utah

CHAINS

37.22 The cor. of secs. 4, 5, 8 and 9, monumented with an iron post, 2 ins. diam., protruding 12 ins. above ground, with brass cap mkd.

T10N R2E

S5|S4

S8|S9

1942

N. 1° 32' W., bet. secs. 4 and 5.

Ascend over steep S. slope, through dense timber and undergrowth.

35.92 The $\frac{1}{4}$ sec. cor. of secs. 4 and 5, monumented with a sandstone, 18x12x6 ins., firmly set 10 ins. in the ground, and dimly mkd. $\frac{1}{4}$ on W. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 12 ins. in the ground, to solid rock and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T10N R2E

 $\frac{1}{4}$

S5|S4

1972

Deposit the original corner stone in mound alongside the iron post.

No suitable bearing trees available.

Cor. is located on steep SE. slope.

N. 1° 27' W., beginning new measurement.

Ascend over steep SE. slope.

9.60 Top of mountain, bears E. and W.; descend over steep N. slope.

32.60 Leave timber.

35.95 Trail road, bears N. 80° W. and S. 80° E.

38.45 The cor. of secs. 4, 5, 32 and 33, on the N. bdy. of the Tp., heretofore described.

From the cor. of secs. 8, 9, 16 and 17.

N. 87° 47' W., bet. secs. 8 and 17.

Ascend over steep NE. slope, through dense timber and undergrowth.

24.50 Spur, slopes N.; descend over steep W. slope.

35.75 Draw, drains N.; ascend over steep E. slope.

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 10 N., R. 2 E., Salt Lake Meridian Utah

CHAINS

- 41.58 Point for the $\frac{1}{4}$ sec. cor. of secs. 8 and 17, at proportionate distance; there is no remaining evidence of the original corner.
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins. in the ground and in a collar of stone, with brass cap mkd.
- T10N R2E
S8
 $\frac{1}{4}$ S17
1973
- from which
- A pine, 8 ins. diam., bears N. 30° E., 32 lks. dist., mkd. $\frac{1}{4}$ S8 BT.
- A pine, 8 ins. diam., bears S. 65° E., 60 lks. dist., mkd. $\frac{1}{4}$ S17 BT.
- Cor. is located on steep NE. slope.
- Ascend over steep NE. slope.
- 43.10 Spur, slopes N.; descend over steep W. slope.
- 74.20 Draw, drains N.; ascend over steep NE. slope.
- 83.16 The cor. of secs. 7, 8, 17 and 18, monumented with a limestone, 20x12x6 ins., firmly set 10 ins. in the ground, and plainly mkd. 4 notches on the S. edge and 5 notches on the E. edge.
- At the cor. point
- Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 18 ins. in the ground, with brass cap mkd.
- T10N R2E
S7 | S8
S18 | S17
1973
- from which
- A pine, 12 ins. diam., bears N. 85° E., 77 lks. dist., mkd. T10N R2E S8 BT.
- A pine, 16 ins. diam., bears West, 40 lks. dist., mkd. T10N R2E S18 BT.
- No other trees available.
- Bury the original corner stone alongside the iron post.
- Cor. is located on steep NE. slope.
-
- N. 85° 57' W., bet. secs. 7 and 18.
- Ascend over steep NE. slope, through dense timber and undergrowth.
- 7.75 Spur, slopes N.; thence along steep broken N. slope of mountain.

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 10 N., R. 2 E., Salt Lake Meridian, Utah

CHAINS

- 33.90 Steep hogs back, slopes N.
- 37.56 Point for the $\frac{1}{4}$ sec. cor. of secs. 7 and 18, at proportionate distance; there is no remaining evidence of the original corner.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 3 ins. in the ground to solid rock and in a mound of stone, 4 ft. base to top, with brass cap mkd.

T10N R2E
 $\frac{1}{4}$ $\frac{S7}{S18}$
1973

from which

A pine, 8 ins. diam., bears N. 17° E., 29 lks. dist., mkd. $\frac{1}{4}$ S7 BT.

A pine, 10 ins. diam., bears S. 10° E., 32 lks. dist., mkd. $\frac{1}{4}$ S18 BT.

Continue over broken mountain land.

- 38.55 Top of ledge, 150 ft. high, faces N. and W.
- 73.80 The closing corner of secs. 7 and 18, heretofore described.

From the cor. of secs. 7, 8, 17 and 18.

N. $0^\circ 54'$ W., bet. secs. 7 and 8.

Descend over steep N. slope, through dense timber and undergrowth.

- 50.27 The $\frac{1}{4}$ sec. cor. of secs. 7 and 8, monumented with a limestone, 18x13x6 ins., firmly set 10 ins. in the ground, and plainly mkd. $\frac{1}{4}$ on W. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 24 ins. in the ground, with brass cap mkd.

T10N R2E
 $\frac{1}{4}$ $\frac{S7}{S8}$
1973

Bury the original corner stone alongside the iron post.

Raise a mound of stone, 3 ft. base, 2 ft. high, W. of corner.

No suitable bearing trees available

N. $0^\circ 29'$ E., beginning new measurement.

- 5.25 Blacksmith Fork River, drains W.
- 7.95 Paved State Highway No. 101, bears E. and W.; ascend over steep S. slope.

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 10 N., R. 2 E., Salt Lake Meridian, Utah

CHAINS

- 17.73 Point for the N. 1/16 sec. cor. of secs. 7 and 8.
Set an iron post, 30 ins. long, 2½ ins. diam. 6 ins. in the ground to solid rock and in a mound of stone, 4 ft. base to top, with brass cap mkd.
- T10N R2E
N 1/16
S7|S8
1973
- from which
- A juniper, 8 ins. diam., bears N. 68° E., 35 lks. dist., mkd. N 1/16 S8 BT.
- 35.46 The cor. of secs. 5, 6, 7 and 8, monumented with a broken limestone, in a mound of stone with 4 notches visible, others have been obliterated.
- At the cor. point
- Set an iron post, 30 ins. long, 2½ ins. diam., 20 ins. in the ground, with brass cap mkd.
- T10N R2E
S6|S5
S7|S8
1972
- No suitable bearing trees available.
- Bury the original corner stone alongside the iron post.
- Cor. is located on steep S. slope, 2.00 chs. W. of main slide area.
-
- From the cor. of secs. 4, 5, 8 and 9.
- N. 88° 35' W., bet. secs. 5 and 8.
- Ascend over steep E. slope, through dense timber and undergrowth.
- 1.65 Spur, slopes S.; thence over broken mountain land.
- 16.00 Top of cliffs, 130 ft. high, bears N. and S.
- 39.20 Spur, slopes S.
- 40.72 Point for the ¼ sec. cor. of secs. 5 and 8, at proportionate distance; there is no remaining evidence of the original corner.
- Set an iron post, 30 ins. long, 2½ ins. diam., 10 ins. in the ground to solid rock and in a mound of stone, 3 ft. base to top, with brass cap mkd.
- T10N R2E
¼ S5
S8
1973

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 10 N., R. 2 E., Salt Lake Meridian, Utah

CHAINS

	<p>from which</p> <p>A juniper, 10 ins. diam., bears N. 16° 30' E., 46 lks. dist., mkd. $\frac{1}{4}$ S5 BT.</p> <p>A juniper, 6 ins. diam., bears S. 19° E., 77 lks. dist., mkd. X BT.</p> <p>Cor. is located on steep SW. slope.</p>
44.75	Draw, drains S.
57.00	Spur, slopes S.
79.40	Wide draw, drains S.
81.44	The cor. of secs. 5, 6, 7 and 8.
	<p>N. 85° 18' W., bet. secs. 6 and 7.</p> <p>Over broken mountain land through dense timber and undergrowth.</p>
37.49	<p>Point for the $\frac{1}{4}$ sec. cor. of secs. 6 and 7, at propor- tionate distance; there is no remaining evidence of the original corner.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 3 ins. in the ground to solid rock and in a mound of stone, 3½ ft. base to top, with brass cap mkd.</p> <p style="text-align: center;">T10N R2E $\frac{1}{4}$ $\frac{S6}{S7}$ 1972</p> <p>No suitable bearing trees available.</p> <p>Cor. is located on steep SW. slope.</p> <p>From the above $\frac{1}{4}$ sec. cor., U.S.G.S. triangulation station "Bluff" is located S. 11° 56' 30" E., 150.784 chains dist.</p> <p>Continue over steep broken mountain land.</p>
73.66	<p>The closing corner of secs. 6 and 7, heretofore des- cribed.</p>
	<p>Point for the W. $\frac{1}{4}$ sec. cor. of sec. 7, T. 10 N., R. 2 E., on the E. bdy. of sec. 12, T. 10 N., R. 1 E., at propor- tionate distance between the closing cor. of secs. 6 and 7, and the closing cor. of secs. 7 and 18, T. 10 N., R. 2 E.</p> <p>Set an iron post, 30 ins. long, 2½ ins. diam., 6 ins. in the ground to solid rock and in a mound of stone, 3 ft. base to top, with brass cap mkd.</p> <p style="text-align: center;">T10N R1E R2E $\frac{1}{4}$ S7 1973</p>

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 10 N., R. 2 E., Salt Lake Meridian, Utah

CHAINS

No suitable bearing trees available.

From the above $\frac{1}{4}$ sec. cor., the $\frac{1}{4}$ sec. cor. of sec. 12,
T. 10 N., R. 1 E., bears N. $0^{\circ} 14' W.$, 4.63 chains dist.

Point for the W. $\frac{1}{4}$ sec. cor. of sec. 6, T. 10 N., R. 2 E.,
on the E. bdy. of sec. 1, T. 10 N., R. 1 E., at propor-
tionate distance, between the cor. of Tps. 10 and 11 N.,
Rs. 1 and 2 E., and the closing cor. of secs. 6 and 7,
T. 10 N., R. 2 E.

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins. in
the ground to solid rock and in a mound of stone, 3 ft.
base to top, with brass cap mkd.

T10N
R1E|R2E
| $\frac{1}{4}$
|S6
1973

No suitable bearing trees available.

Cor. is located in small draw that drains SW.

From the above $\frac{1}{4}$ sec. cor., the $\frac{1}{4}$ sec. cor. of sec. 1,
T. 10 N., R. 1 E., bears N. $0^{\circ} 37' W.$, 1.93 chains
dist.

From the cor. of secs. 5, 6, 7 and 8.

N. $1^{\circ} 04' W.$, bet. secs. 5 and 6.

Ascend over steep S. slope, through dense timber and
undergrowth.

39.13 The $\frac{1}{4}$ sec. cor. of secs. 5 and 6, monumented with a lime-
stone, 24x16x8 ins., firmly set 6 ins. in the ground, and
dimly mkd. $\frac{1}{4}$ on W. face.

At the cor. point

Set an iron post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 6 ins. in
the ground to solid rock and in a mound of stone, 3 ft.
base to top, with brass cap mkd.

T10N R2E
| $\frac{1}{4}$
S6|S5
1973

Bury the original corner stone alongside the iron post.

No suitable bearing trees available.

Cor. is located on steep SE. slope.

N. $0^{\circ} 09' E.$, beginning new measurement.

23.80 Top of mountain dividing Blacksmith Fork and Millville
Canyon watershed, bears E. and W., descend over steep N.
slope.

Dependent Resurvey of a Portion of the Subdivisional
Lines, T. 10 N., R. 2 E., Salt Lake Meridian. Utah

CHAINS

39.34 The cor. of secs. 5 6, 31 and 32, on the N. bdy. of the
Tp., heretofore described.

General Description

The portion of Township 10 North, Range 2 East, covered by this resurvey is all in high mountain land covered with dense timber and undergrowth. The elevation is from about 5,000 ft. above sea level in the bottom of Blacksmith Fork Canyon to about 8,000 ft. above sea level on top of the mountain dividing Blacksmith Fork and Millville Canyon watershed. The township is accessible by State Highway No. 101. Blacksmith Fork River enters the township through sec. 12, flows westerly and leaves the township through sec. 7. There are a number of privately owned homes along the river in the bottom of Blacksmith Fork Canyon.

The mean magnetic declination was read at a number of stations throughout the progress of the survey and the average of these readings was found to be $16^{\circ} 45' E.$

CHAINS

Blank

Page

CERTIFICATE OF SURVEY

(I) Milton R. Workman, HEREBY

CERTIFY upon honor that, in pursuance of special instructions bearing date of the 21st day of June, 192 (1900) have dependently resurveyed the north 2 1/2 miles of the east boundary of T. 10 N., R. 1 E., the north 2 miles of the east boundary, the north boundary and a portion of the subdivisional lines of T. 10 N., R. 2 E.

of the Salt Lake Meridian, in the State of Utah, which are represented in the foregoing field notes as having been executed by (me), (me) and under (my) direction, and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

March 15, 1974 (Date)

Milton R. Workman (Cadastral Surveyor)

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

SUBMITTED FOR APPROVAL Date FEB 6 1975

BUREAU OF LAND MANAGEMENT Washington, D.C.

The foregoing field notes of the dependent resurvey of the north 2 1/2 miles of the east boundary of T. 10 N., R. 1 E., the north 2 miles of the east boundary, the north boundary and a portion of the subdivisional lines of T. 10 N., R. 2 E., Salt Lake Meridian, Utah,

executed by Milton R. Workman, Cadastral Surveyor

having been critically examined and found correct, are hereby approved.

JAN 26 1976 (Date)

Donald W. Fisher (Chief, Division of Cadastral Survey)

CERTIFICATE OF TRANSCRIPT

That the foregoing transcript of the field notes of the above described survey is a true copy of the original field notes.